


待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 8: SISO B: 發射器 802.11g
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

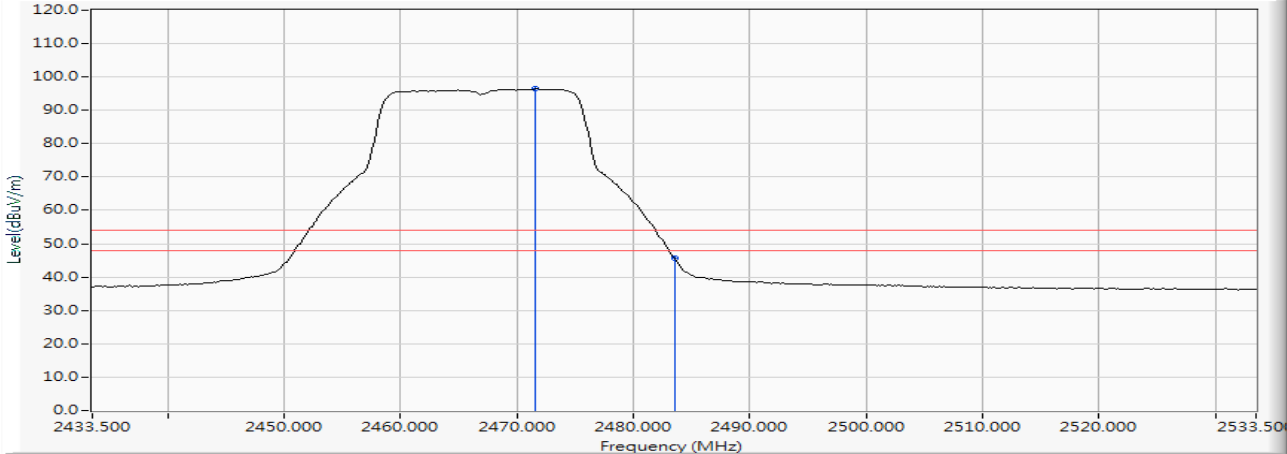

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.616	10.593	85.796	96.389	--	--	AVERAGE
2		2483.500	10.640	35.194	45.835	-8.165	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 8: SISO B: 發射器 802.11g
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

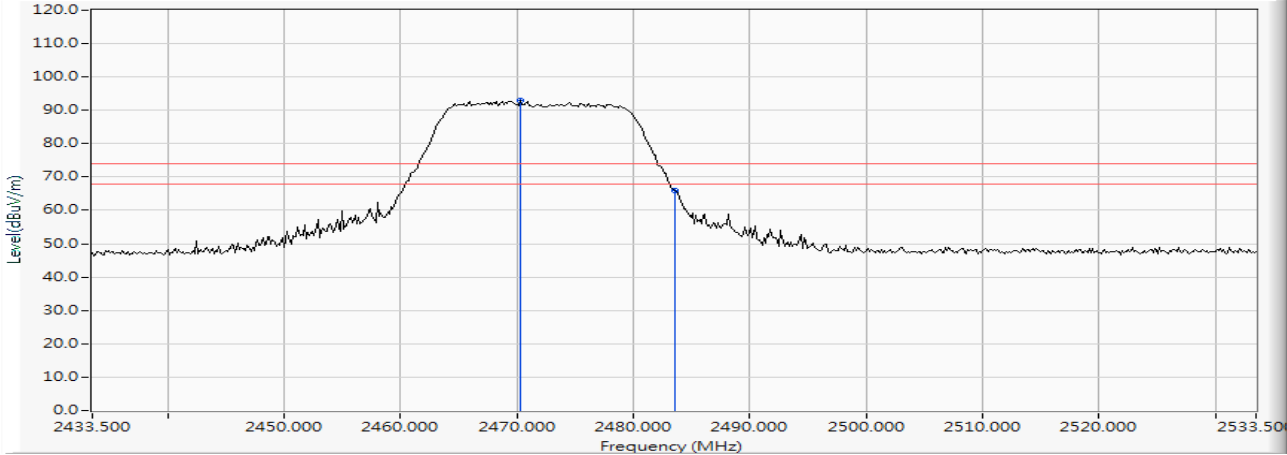

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2470.312	10.587	82.477	93.064	--	--	PEAK
2		2483.500	10.640	55.241	65.882	-8.118	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 8: SISO B: 發射器 802.11g
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

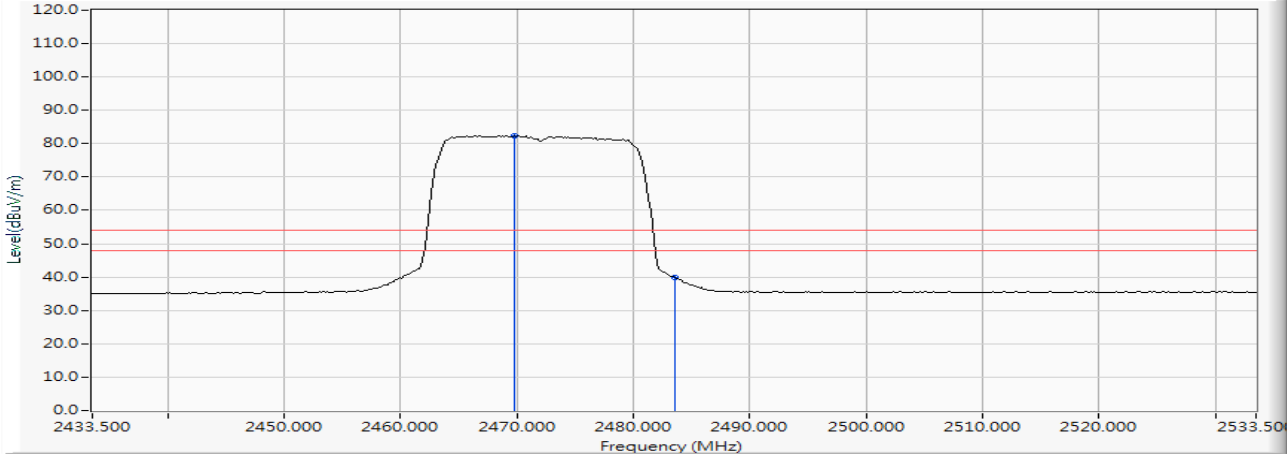

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2469.732	10.584	71.740	82.324	--	--	AVERAGE
2		2483.500	10.640	29.369	40.010	-13.990	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 8: SISO B: 發射器 802.11g
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

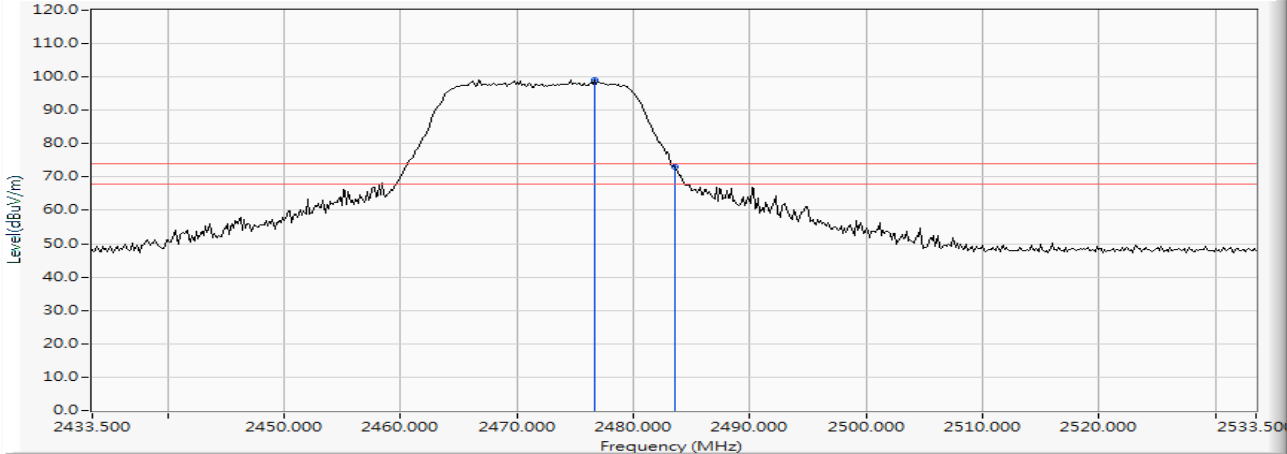

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2476.688	10.615	88.350	98.965	--	--	PEAK
2		2483.500	10.640	62.251	72.892	-1.108	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 8: SISO B: 發射器 802.11g
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

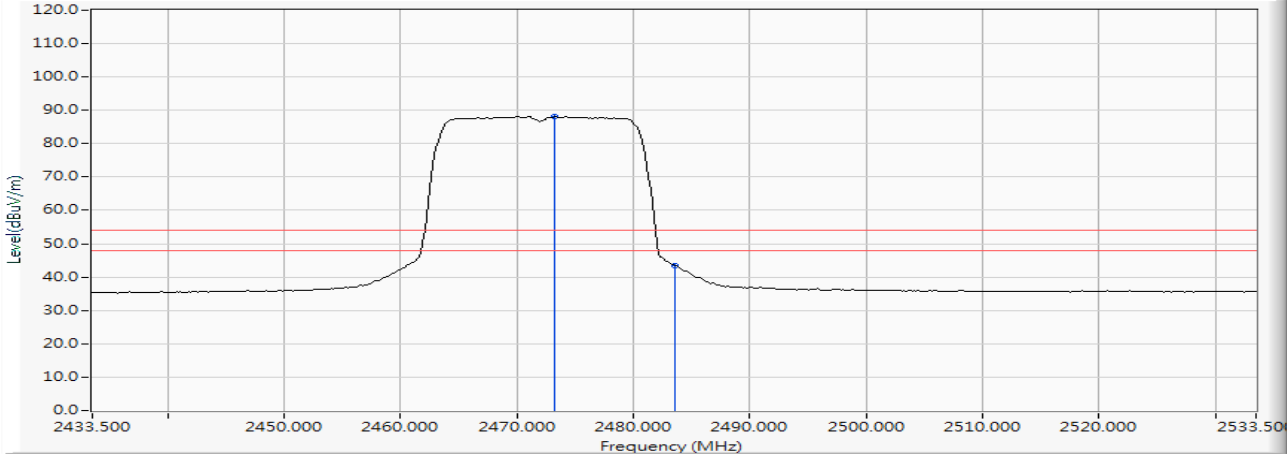

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.210	10.600	77.484	88.084	--	--	AVERAGE
2		2483.500	10.640	32.844	43.485	-10.515	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 01 (2412MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

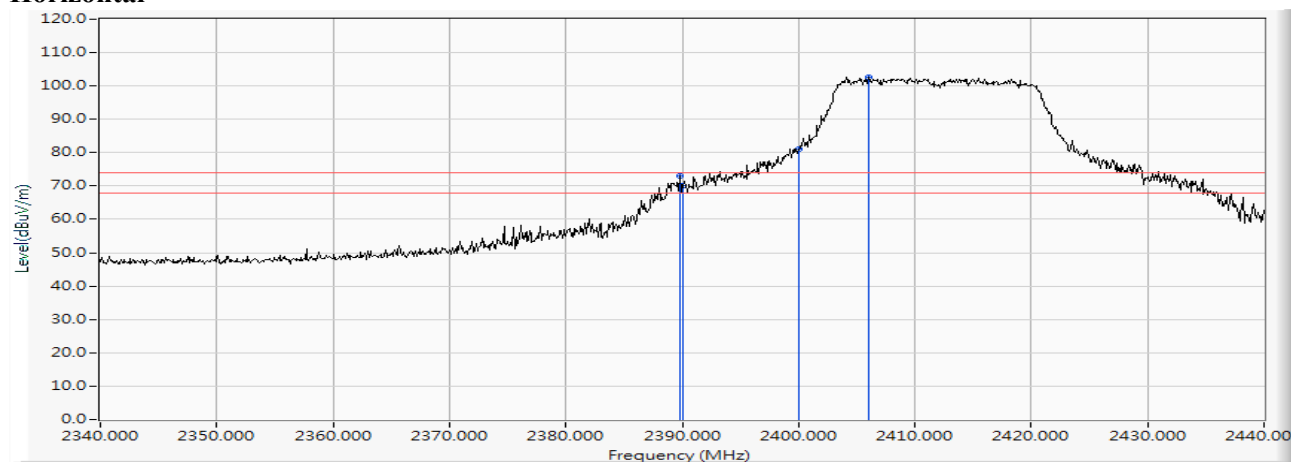Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2389.800	10.261	62.915	73.176	-0.824	74.000	PEAK
2		2390.000	10.262	59.869	70.131	-3.869	74.000	PEAK
3		2400.000	10.304	70.892	81.195	--	--	PEAK
4	*	2406.000	10.327	92.186	102.514	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
 待測物型號：AX200NGW
 測試頻道：CH 01 (2412MHz)
 量測天線：3117/00203800
 檢測器：峰值 & 平均值
 測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
 測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
 測試距離：3 M
 環境溫度：20 °C
 環境濕度：52 %

Horizontal

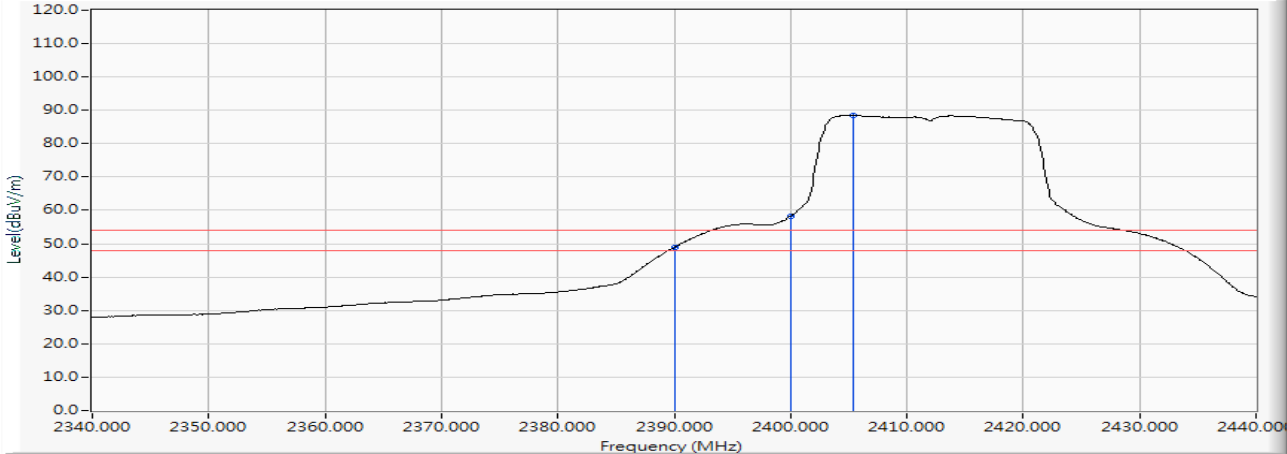

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	38.660	48.922	-5.078	54.000	AVERAGE
2		2400.000	10.304	47.963	58.266	--	--	AVERAGE
3	*	2405.400	10.325	78.086	88.411	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
 待測物型號：AX200NGW
 測試頻道：CH 01 (2412MHz)
 量測天線：3117/00203800
 檢測器：峰值 & 平均值
 測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
 測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
 測試距離：3 M
 環境溫度：20 °C
 環境濕度：52 %

Vertical

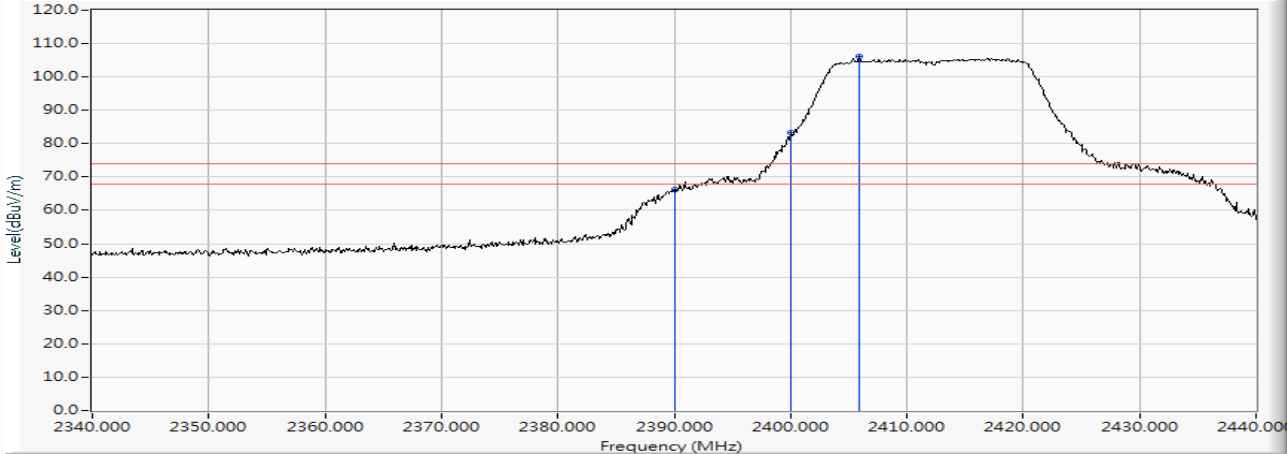

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	56.106	66.368	-7.632	74.000	PEAK
2		2400.000	10.304	72.987	83.290	--	--	PEAK
3	*	2405.900	10.327	95.892	106.219	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
 待測物型號：AX200NGW
 測試頻道：CH 01 (2412MHz)
 量測天線：3117/00203800
 檢測器：峰值 & 平均值
 測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
 測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
 測試距離：3 M
 環境溫度：20 °C
 環境濕度：52 %

Vertical

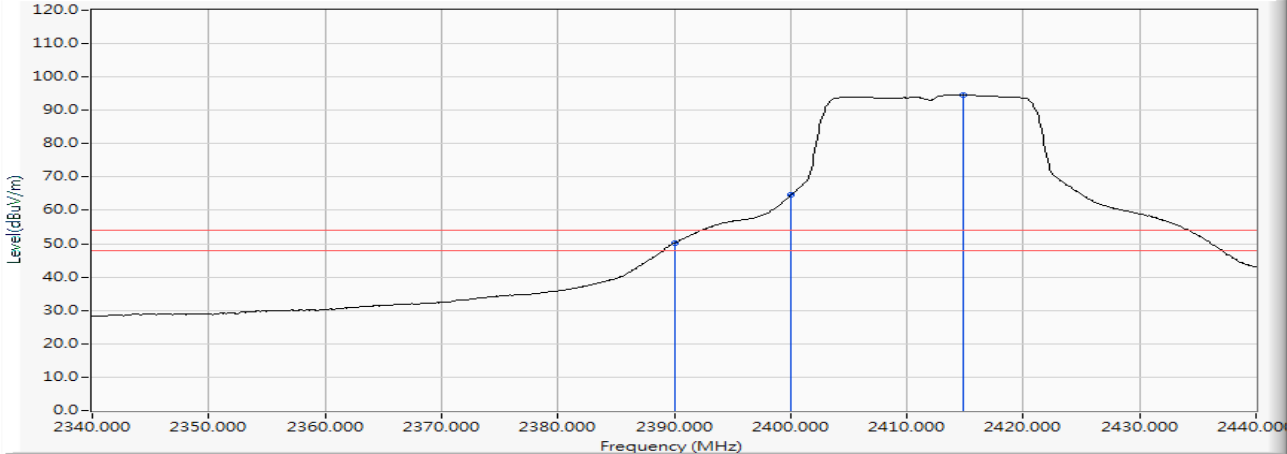

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	39.866	50.128	-3.872	54.000	AVERAGE
2		2400.000	10.304	54.230	64.533	--	--	AVERAGE
3	*	2414.800	10.363	84.200	94.563	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

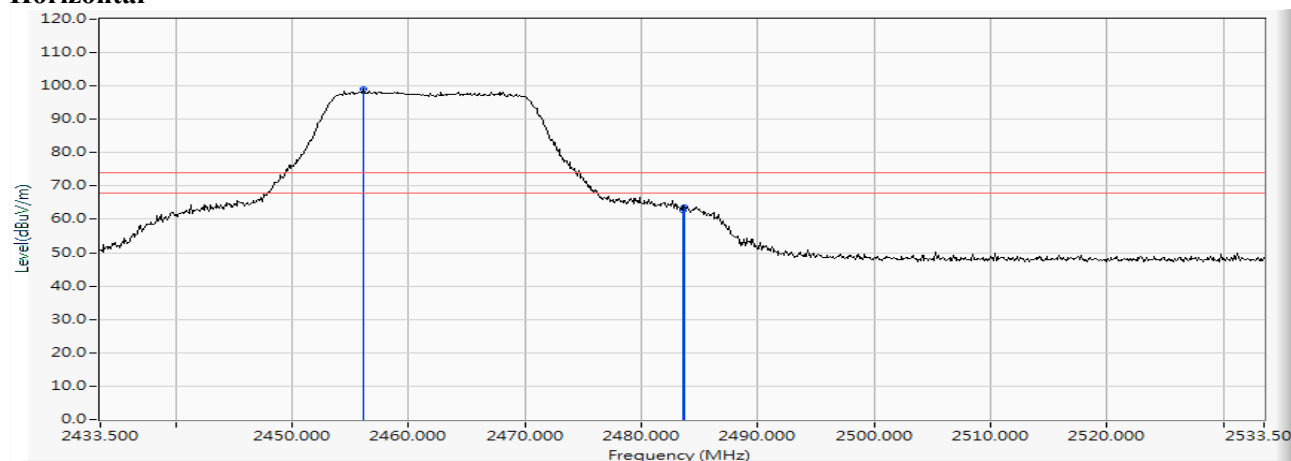Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2456.100	10.524	88.438	98.962	--	--	PEAK
2		2483.500	10.640	52.247	62.888	-11.112	74.000	PEAK
3		2483.700	10.642	53.120	63.762	-10.238	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

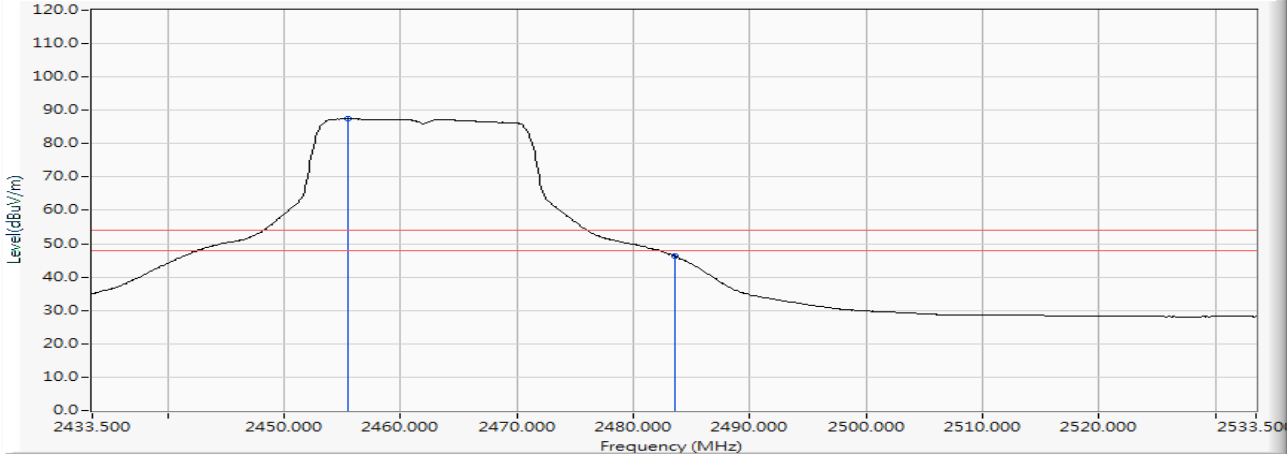

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2455.500	10.520	76.890	87.411	--	--	AVERAGE
2		2483.500	10.640	35.659	46.300	-7.700	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

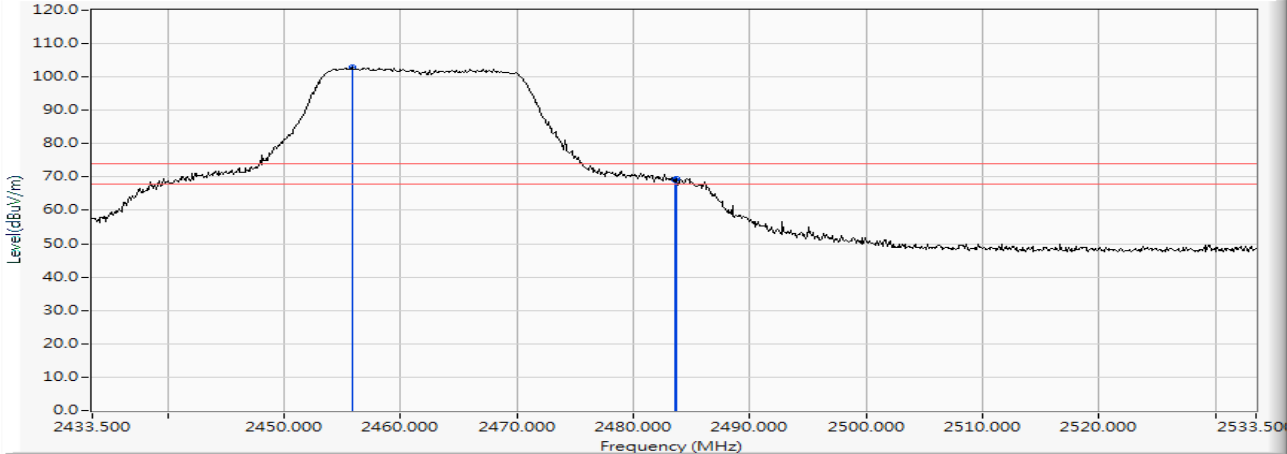

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2455.800	10.523	92.460	102.982	--	--	PEAK
2		2483.500	10.640	58.444	69.085	-4.915	74.000	PEAK
3		2483.700	10.642	58.760	69.402	-4.598	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

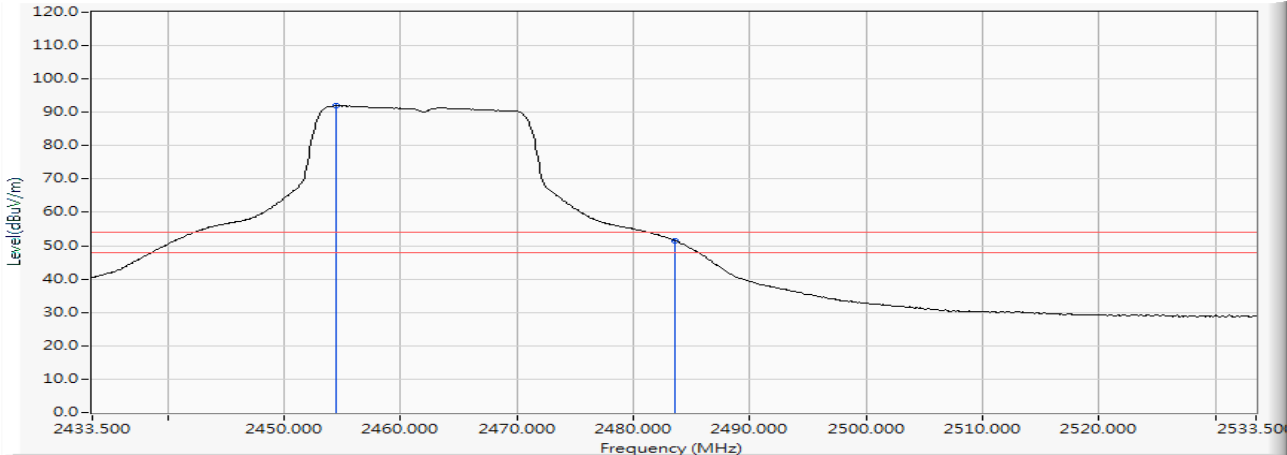

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2454.400	10.517	81.381	91.898	--	--	AVERAGE
2		2483.500	10.640	40.933	51.574	-2.426	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

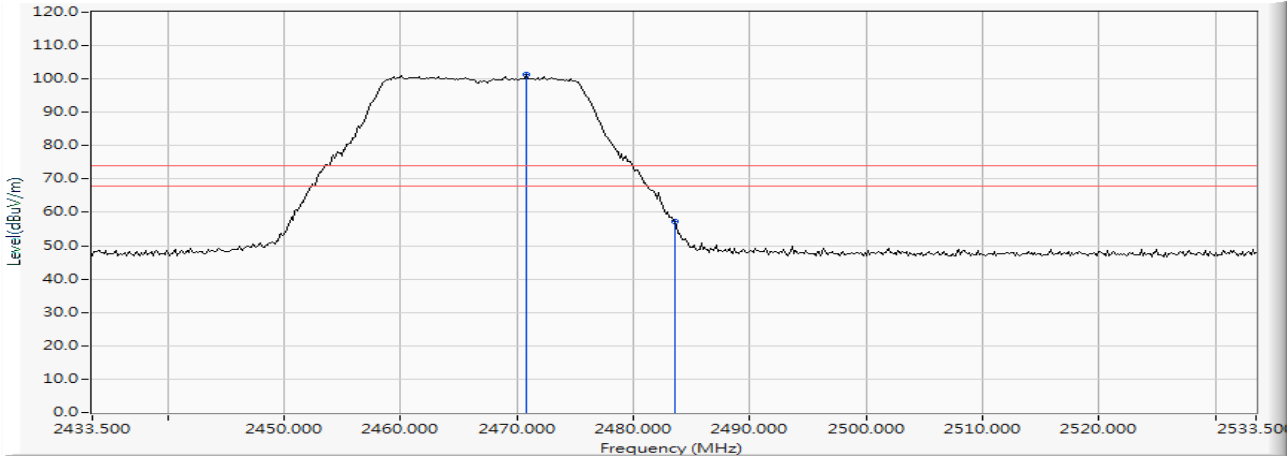

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.746	10.589	90.663	101.252	--	--	PEAK
2		2483.500	10.640	46.602	57.243	-16.757	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

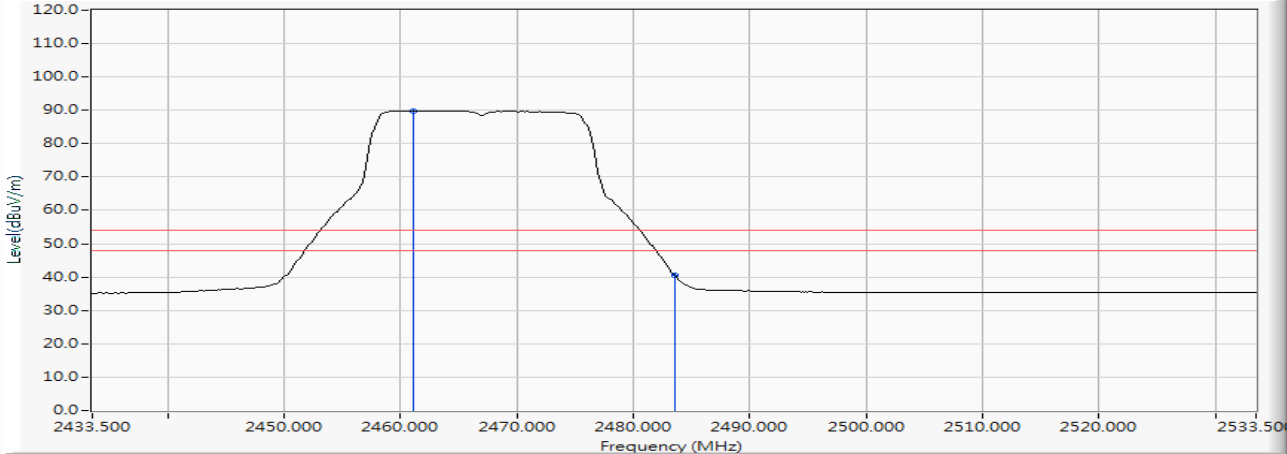

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2461.036	10.545	79.361	89.906	--	--	AVERAGE
2		2483.500	10.640	30.035	40.676	-13.324	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

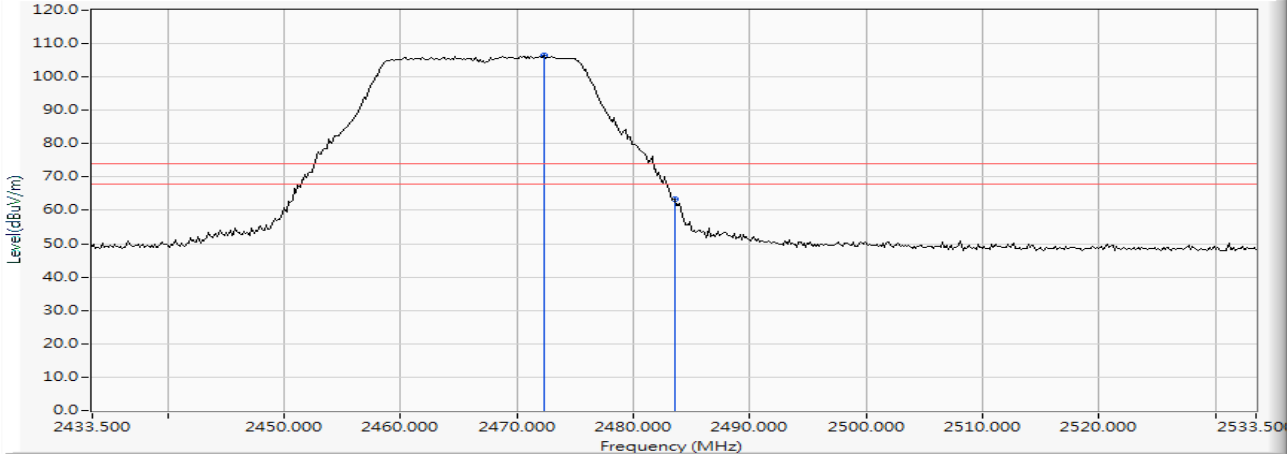

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2472.341	10.596	95.910	106.506	--	--	PEAK
2		2483.500	10.640	52.616	63.257	-10.743	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

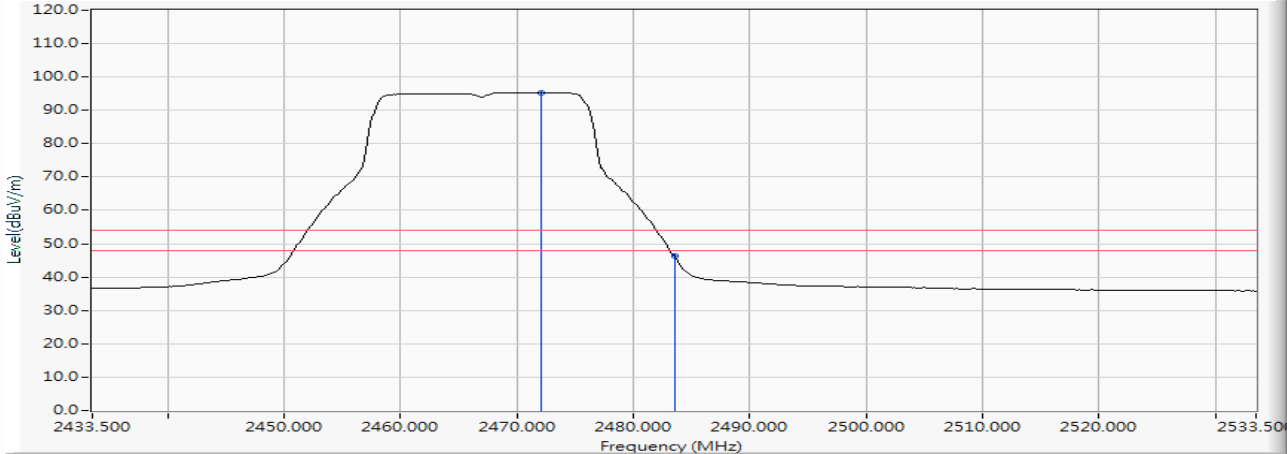

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2472.051	10.596	84.746	95.341	--	--	AVERAGE
2		2483.500	10.640	35.577	46.218	-7.782	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

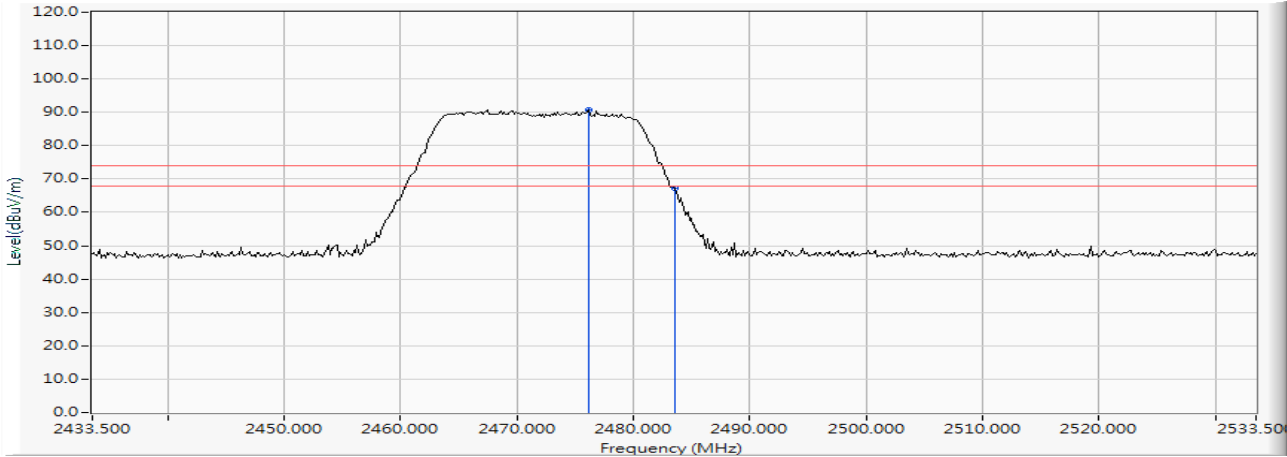

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2476.109	10.613	80.206	90.818	--	--	PEAK
2		2483.500	10.640	56.673	67.314	-6.686	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

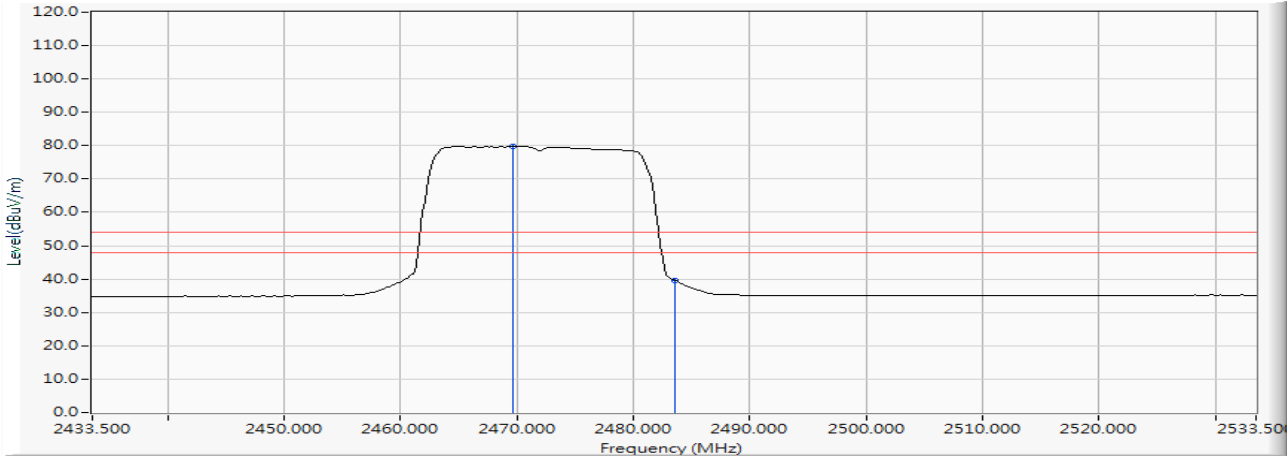

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2469.587	10.584	69.168	79.752	--	--	AVERAGE
2		2483.500	10.640	29.042	39.683	-14.317	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

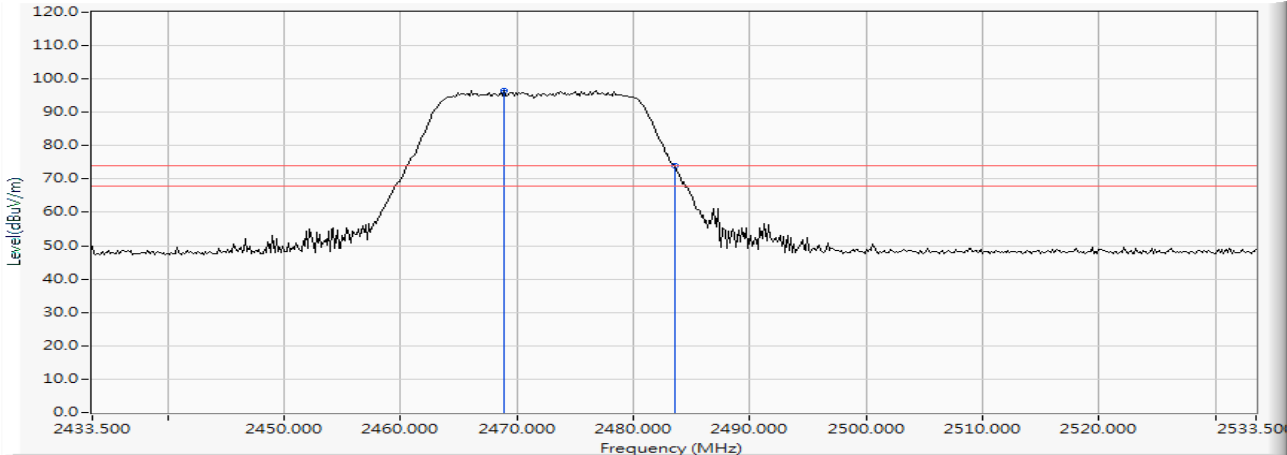

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2468.862	10.580	85.924	96.504	--	--	PEAK
2		2483.500	10.640	63.223	73.864	-0.136	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 9: SISO B: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

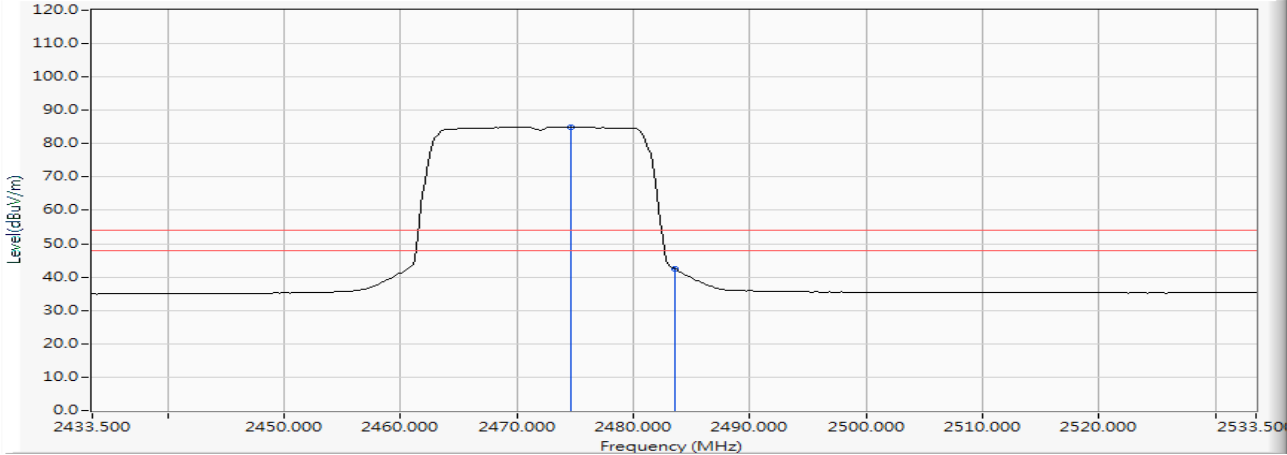

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2474.659	10.607	74.483	85.090	--	--	AVERAGE
2		2483.500	10.640	31.931	42.572	-11.428	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

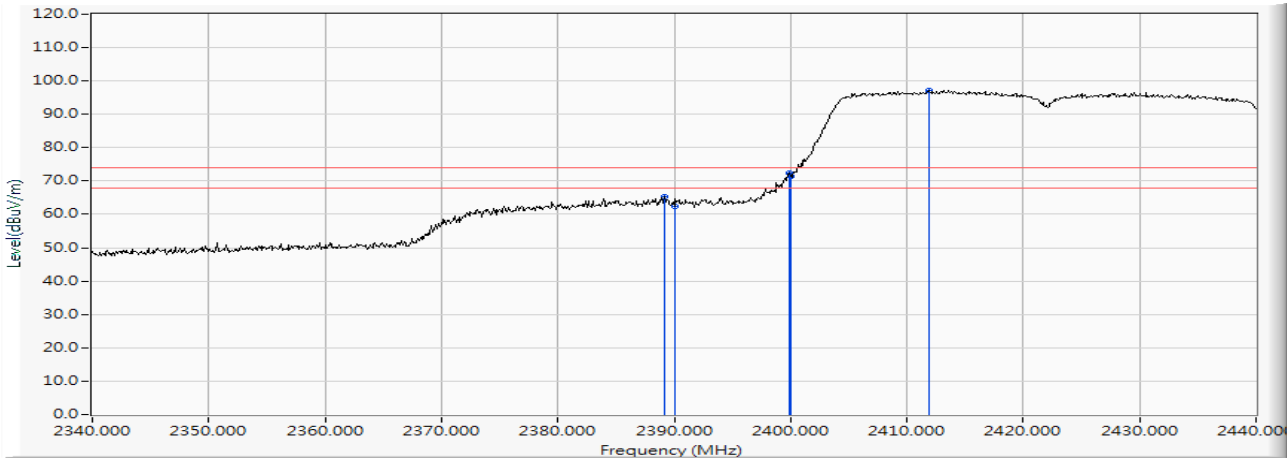

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2389.200	10.259	55.002	65.261	-8.739	74.000	PEAK
2		2390.000	10.262	52.233	62.495	-11.505	74.000	PEAK
3		2399.900	10.304	62.005	72.308	--	--	PEAK
4		2400.000	10.304	61.013	71.316	--	--	PEAK
5	*	2411.900	10.352	86.900	97.252	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

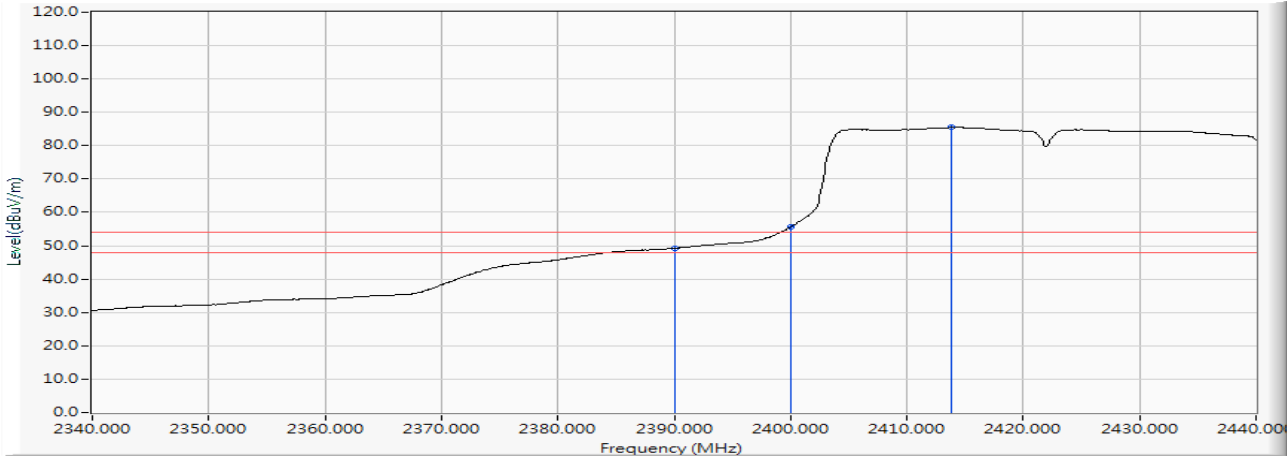

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	38.974	49.236	-4.764	54.000	AVERAGE
2		2400.000	10.304	45.385	55.688	--	--	AVERAGE
3	*	2413.800	10.359	75.120	85.479	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 03 (2422 MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

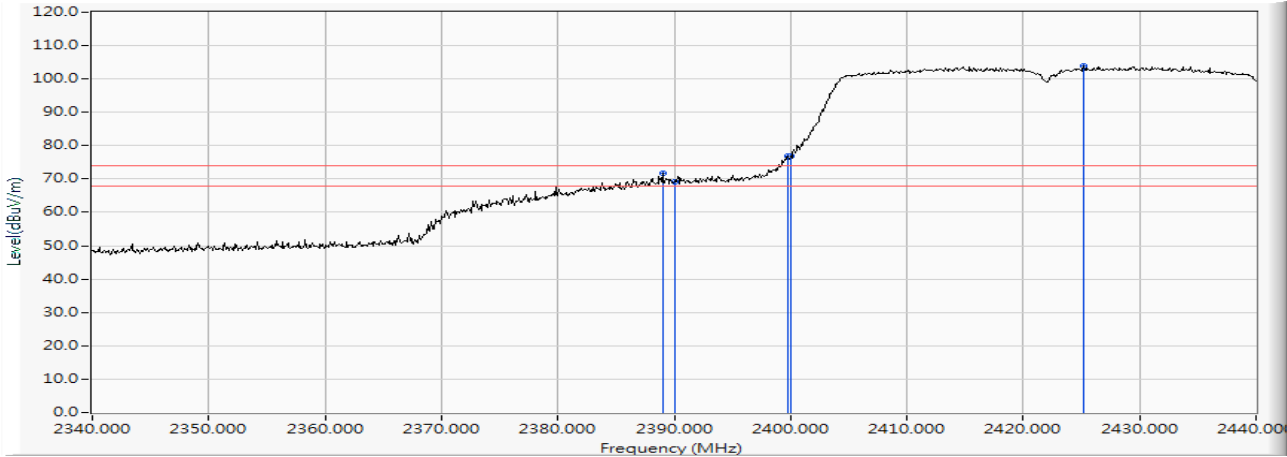

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1		2389.000	10.258	61.564	71.822	-2.178	74.000	PEAK
2		2390.000	10.262	59.001	69.263	-4.737	74.000	PEAK
3		2399.800	10.302	66.731	77.034	--	--	PEAK
4		2400.000	10.304	66.647	76.950	--	--	PEAK
5	*	2425.200	10.406	93.561	103.967	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

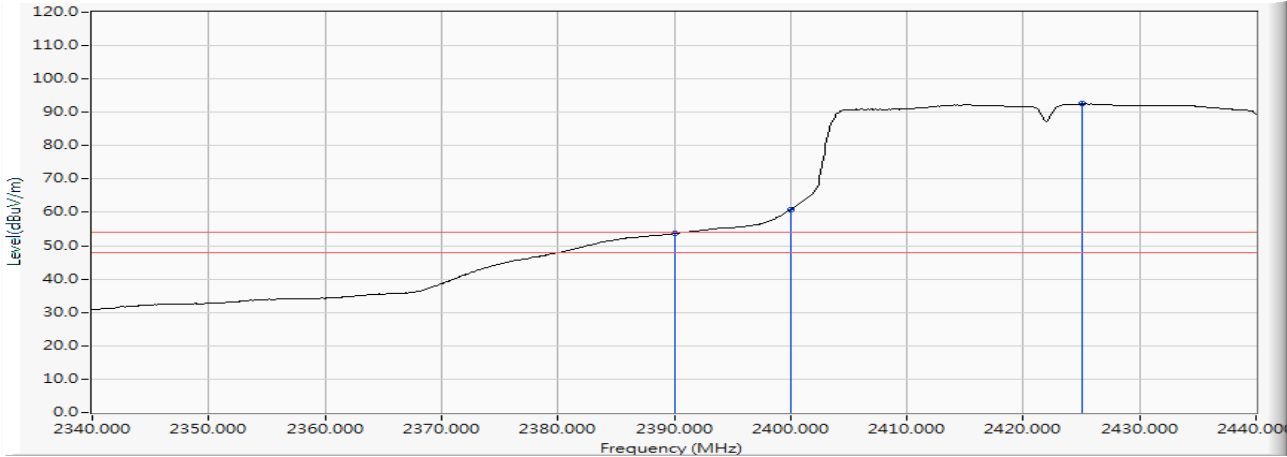

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	43.371	53.633	-0.367	54.000	AVERAGE
2		2400.000	10.304	50.511	60.814	--	--	AVERAGE
3	*	2425.100	10.406	82.112	92.518	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

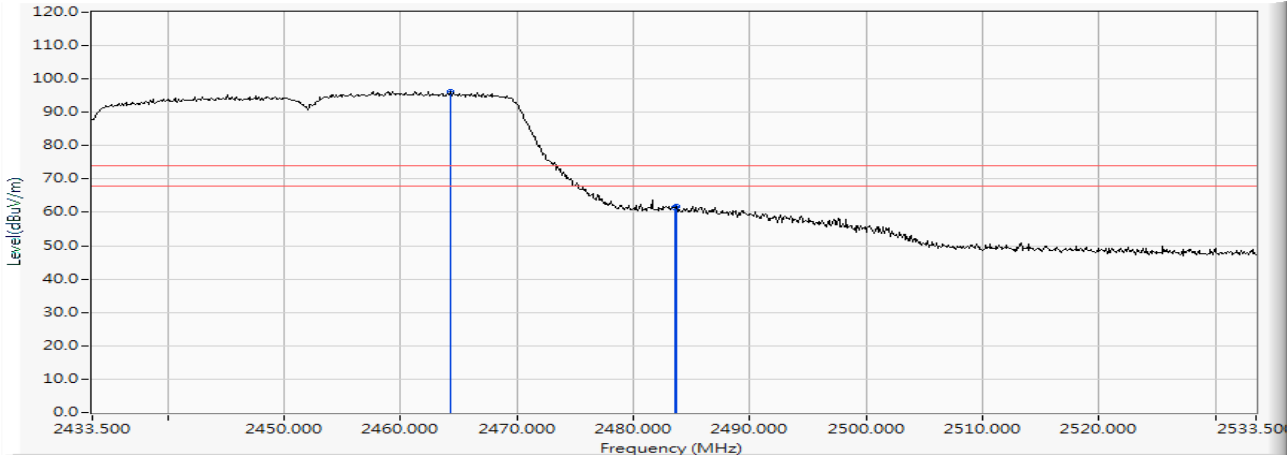

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2464.300	10.559	85.662	96.222	--	--	PEAK
2		2483.500	10.640	50.899	61.540	-12.460	74.000	PEAK
3		2483.700	10.642	51.233	61.875	-12.125	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

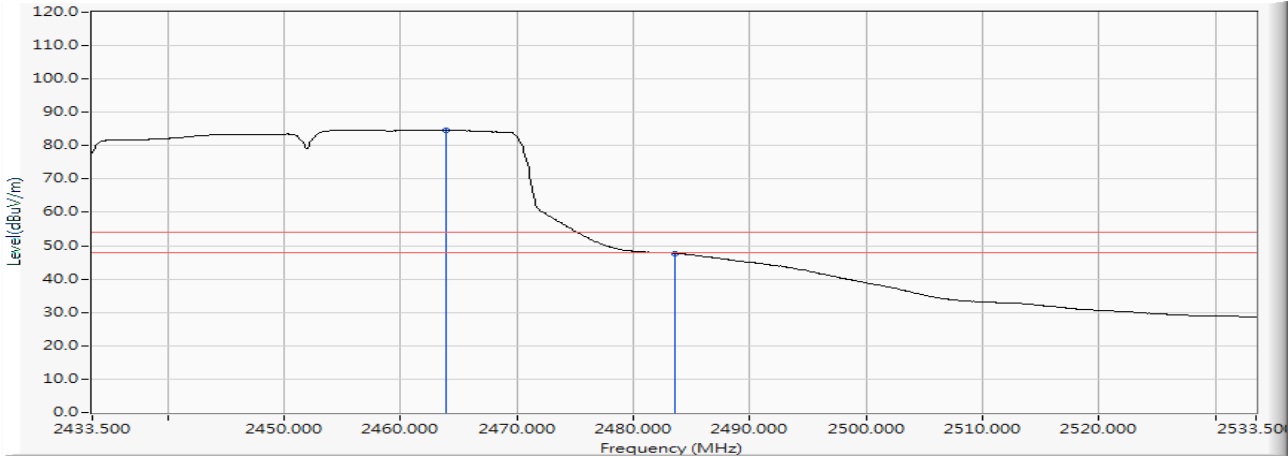

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2463.900	10.558	74.178	84.736	--	--	AVERAGE
2		2483.500	10.640	37.079	47.720	-6.280	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108年04月03日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

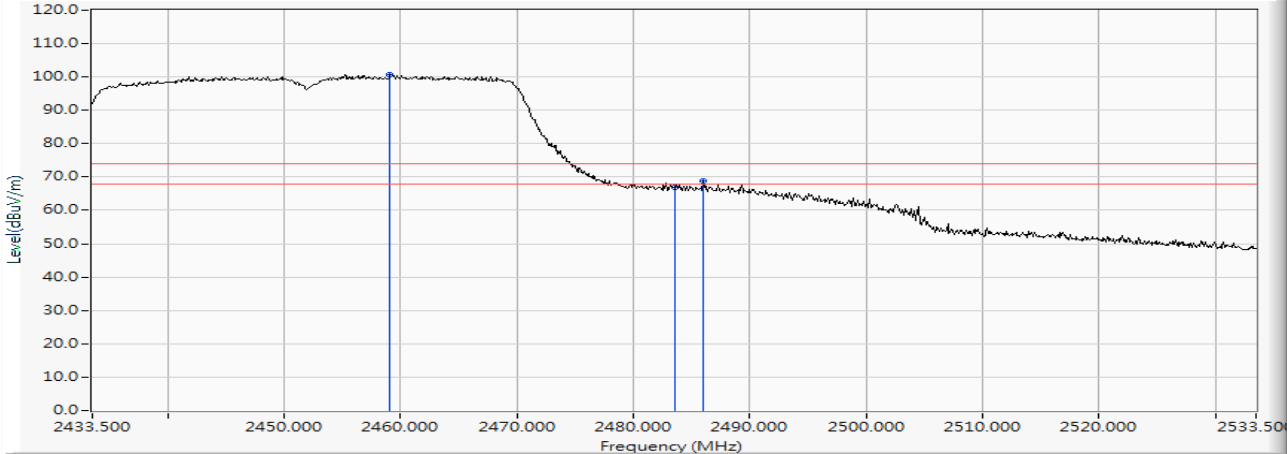

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2459.100	10.537	90.249	100.786	--	--	PEAK
2		2483.500	10.640	56.209	66.850	-7.150	74.000	PEAK
3		2486.000	10.651	58.037	68.688	-5.312	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

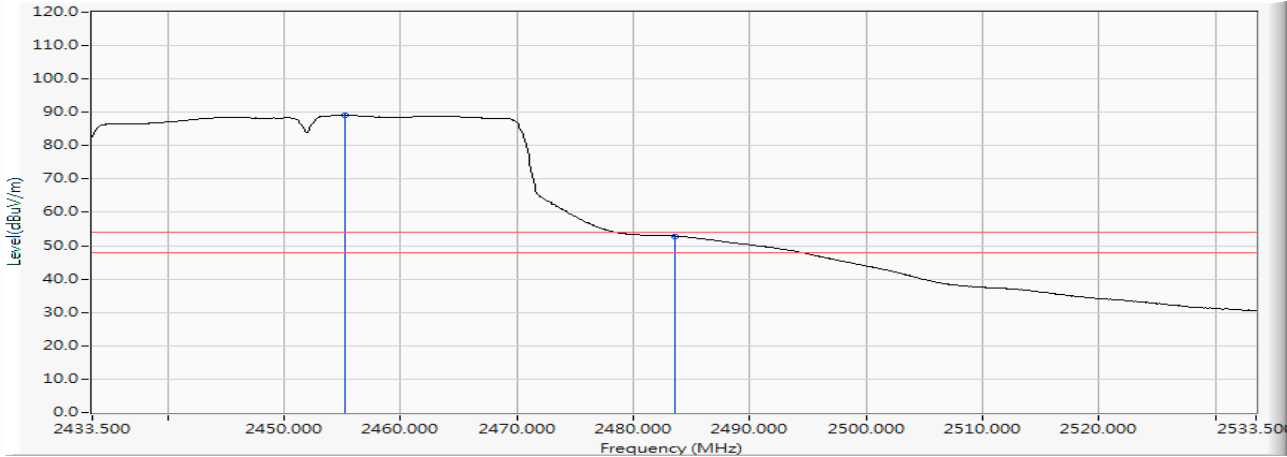

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2455.200	10.519	78.567	89.087	--	--	AVERAGE
2		2483.500	10.640	42.257	52.898	-1.102	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 10 (2457MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

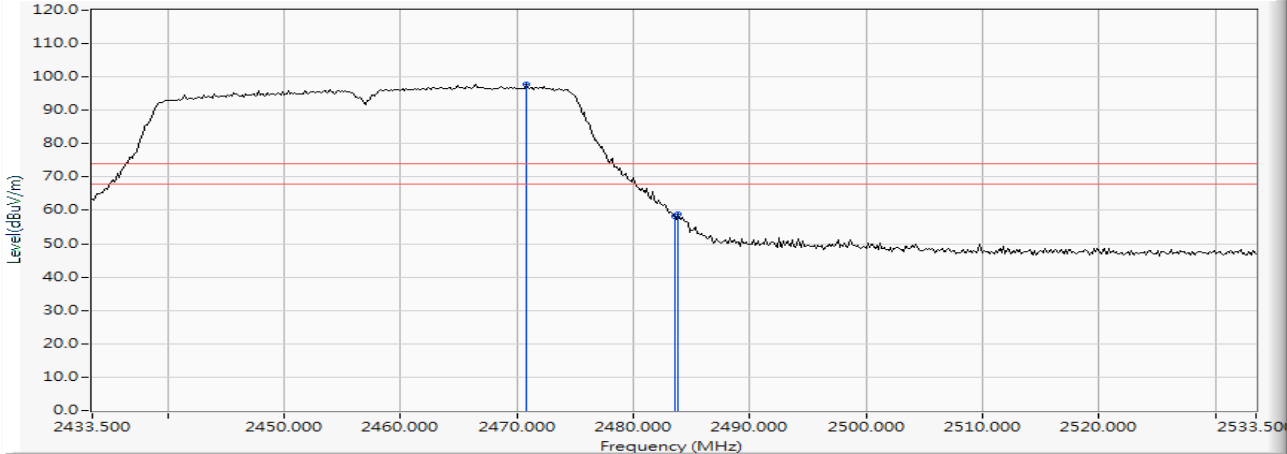

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.746	10.589	87.263	97.852	--	--	PEAK
2		2483.500	10.640	47.566	58.207	-15.793	74.000	PEAK
3		2483.790	10.643	48.158	58.800	-15.200	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

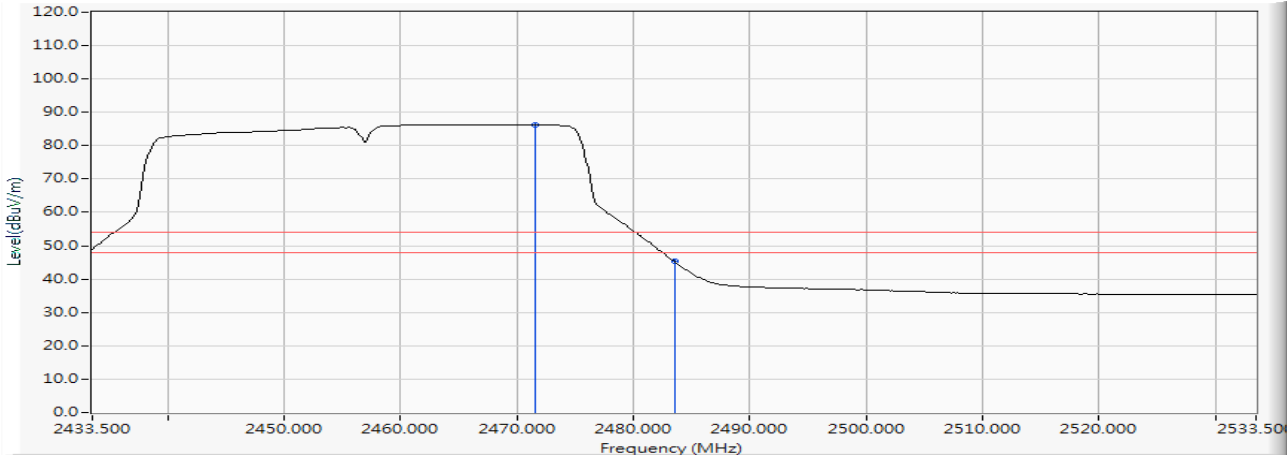

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.616	10.593	75.709	86.302	--	--	AVERAGE
2		2483.500	10.640	34.601	45.242	-8.758	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

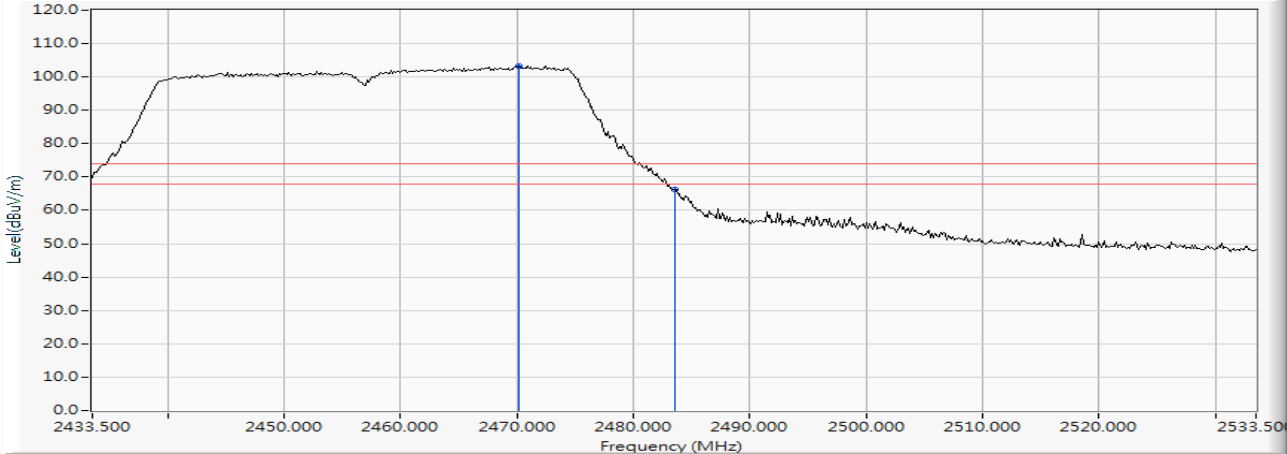

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.167	10.586	92.796	103.382	--	--	PEAK
2		2483.500	10.640	55.490	66.131	-7.869	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

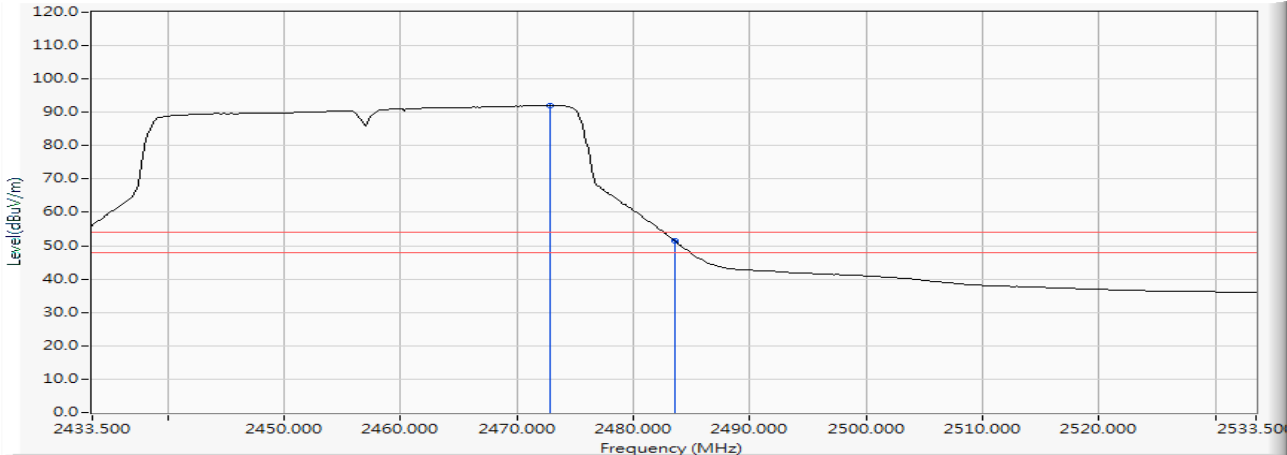

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2472.775	10.598	81.376	91.974	--	--	AVERAGE
2		2483.500	10.640	40.857	51.498	-2.502	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

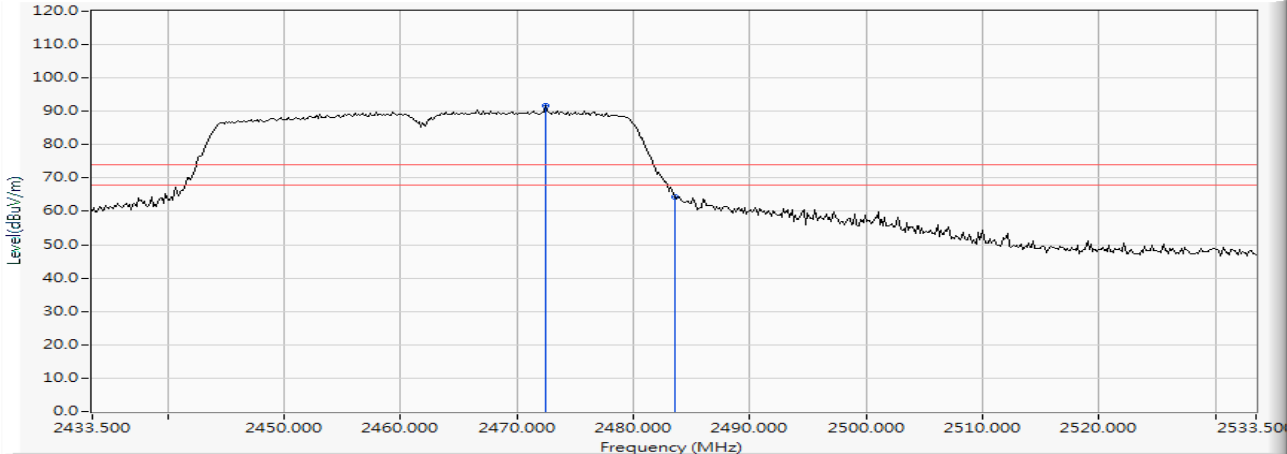

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2472.486	10.597	80.944	91.541	--	--	PEAK
2		2483.500	10.640	53.567	64.208	-9.792	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

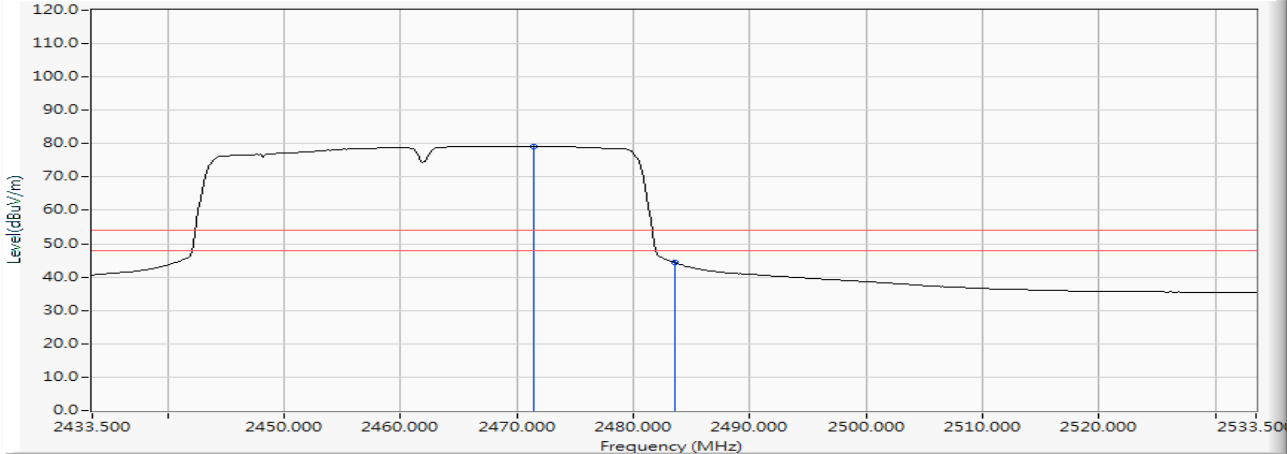

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.471	10.593	68.685	79.277	--	--	AVERAGE
2		2483.500	10.640	33.746	44.387	-9.613	54.000	AVERAGE

Note:

- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. “*”, means this data is the worst emission level.
- 3. Measurement Level = Reading Level + Correct Factor

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

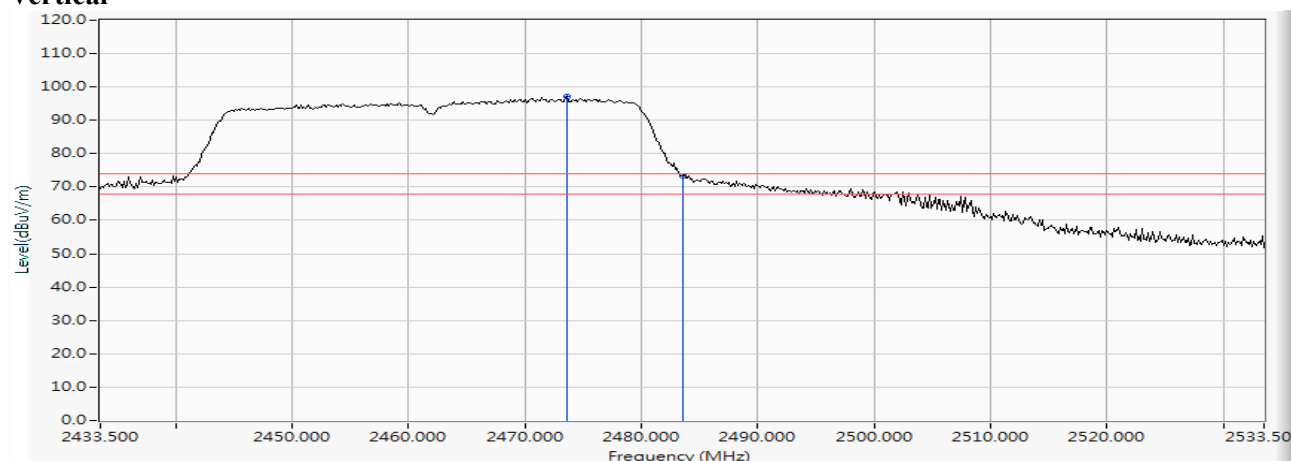Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.645	10.602	86.683	97.285	--	--	PEAK
2		2483.500	10.640	62.782	73.423	-0.577	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 10: SISO B: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

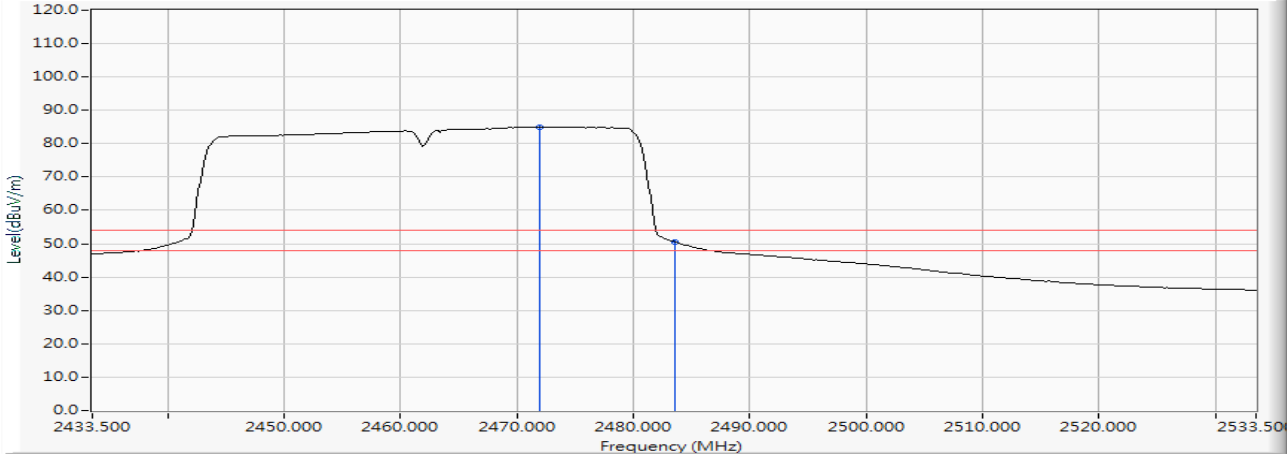

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2471.906	10.594	74.427	85.021	--	--	AVERAGE
2		2483.500	10.640	39.865	50.506	-3.494	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 01 (2412MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

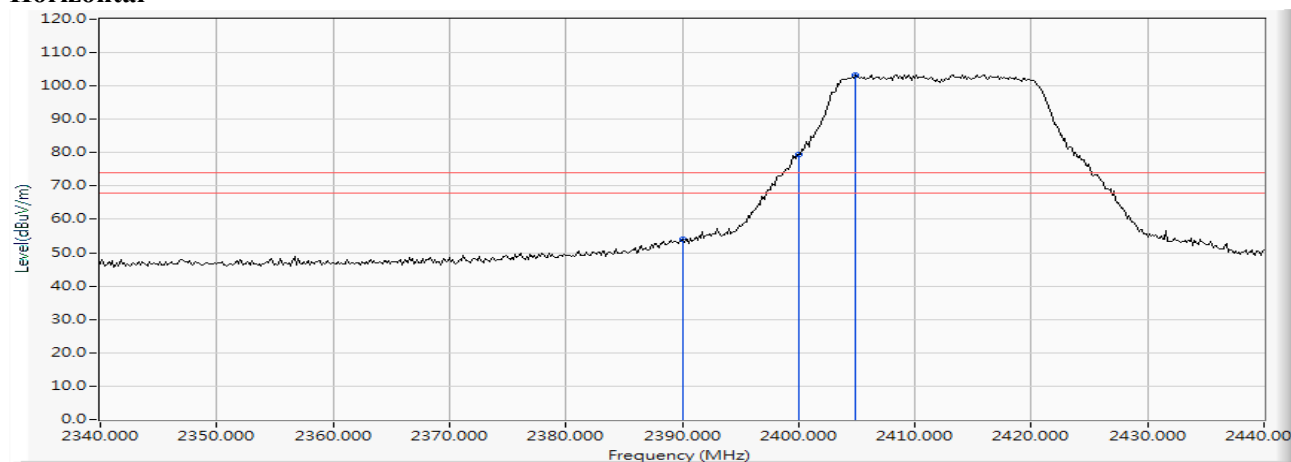Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	43.768	54.030	-19.970	74.000	PEAK
2		2400.000	10.304	69.185	79.488	--	--	PEAK
3	*	2404.928	10.324	93.097	103.420	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 01 (2412MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

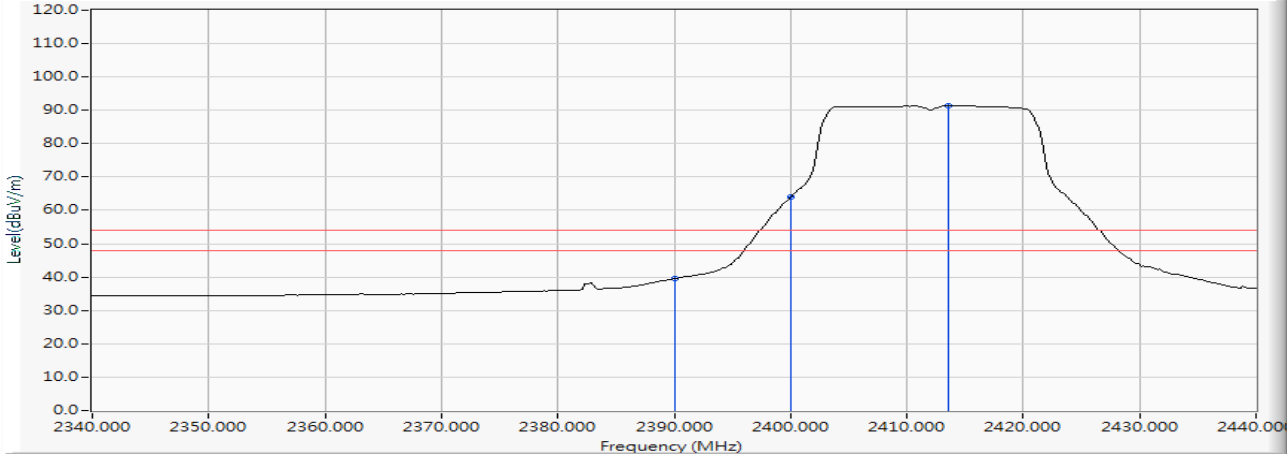

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	29.276	39.538	-14.462	54.000	AVERAGE
2		2400.000	10.304	53.714	64.017	--	--	AVERAGE
3	*	2413.623	10.358	81.058	91.416	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 01 (2412MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

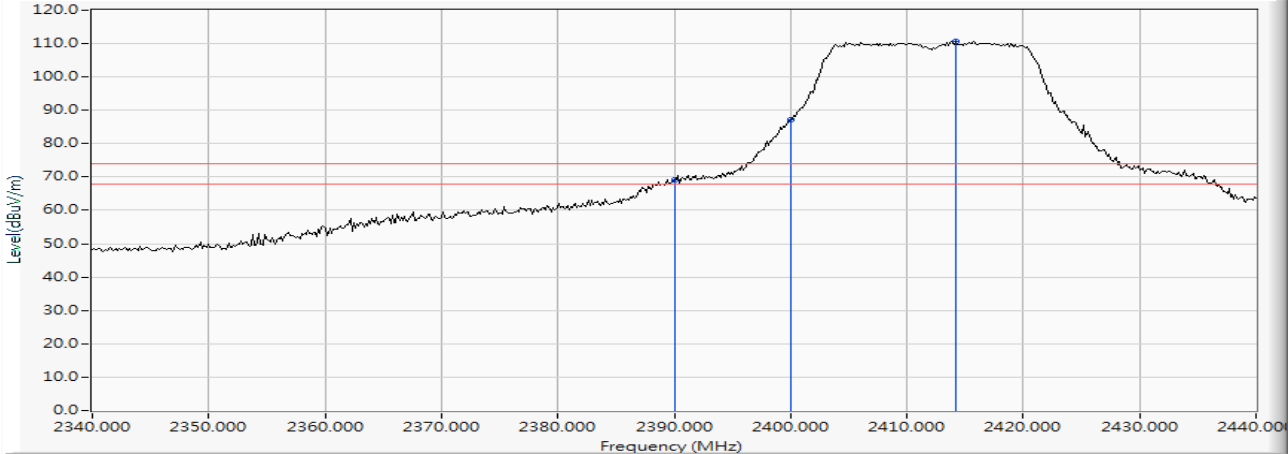

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	58.962	69.224	-4.776	74.000	PEAK
2		2400.000	10.304	76.764	87.067	--	--	PEAK
3	*	2414.203	10.360	100.385	110.746	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 01 (2412MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

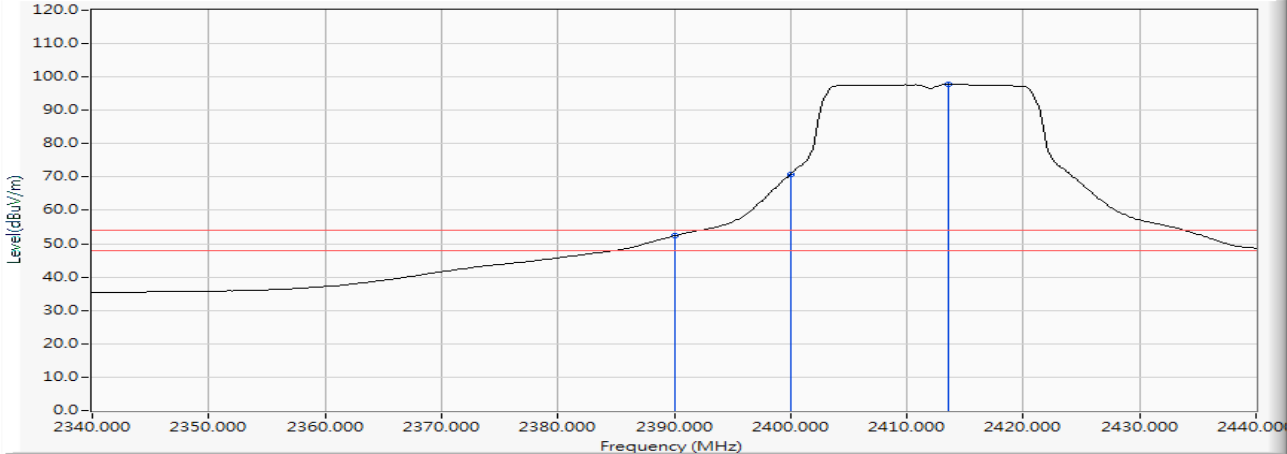

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	42.067	52.329	-1.671	54.000	AVERAGE
2		2400.000	10.304	60.460	70.763	--	--	AVERAGE
3	*	2413.623	10.358	87.390	97.748	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

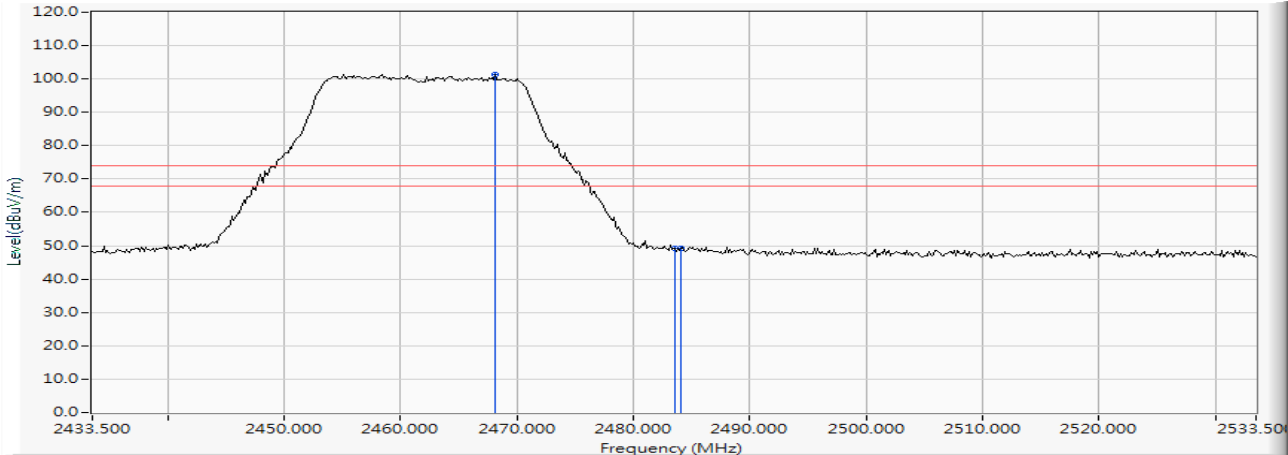

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2468.138	10.577	90.867	101.444	--	--	PEAK
2		2483.500	10.640	38.508	49.149	-24.851	74.000	PEAK
3		2484.080	10.644	38.629	49.272	-24.728	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

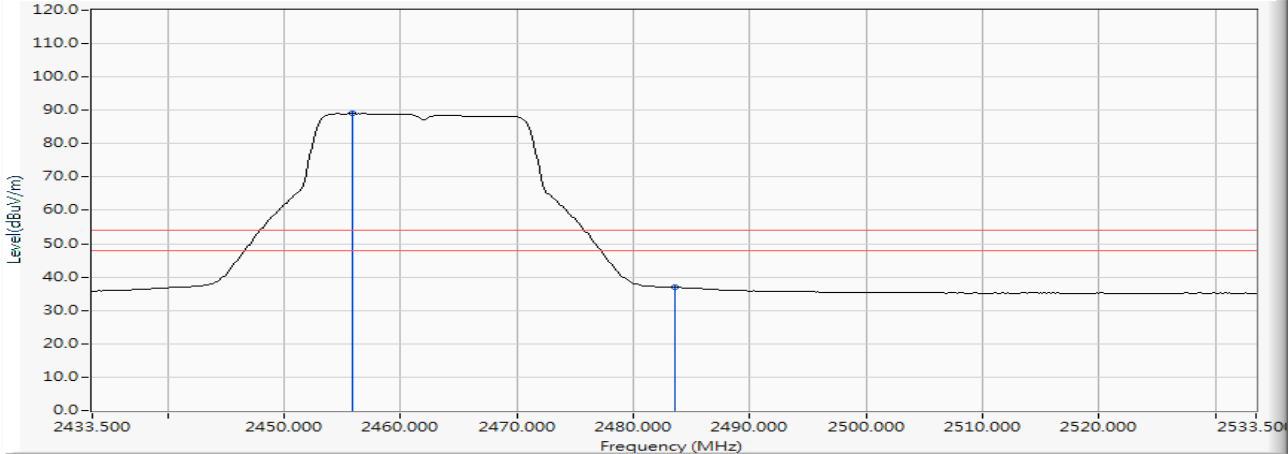


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2455.819	10.523	78.472	88.994	--	--	AVERAGE
2		2483.500	10.640	26.318	36.959	-17.041	54.000	AVERAGE

Note:

- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. “*”, means this data is the worst emission level.
- 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

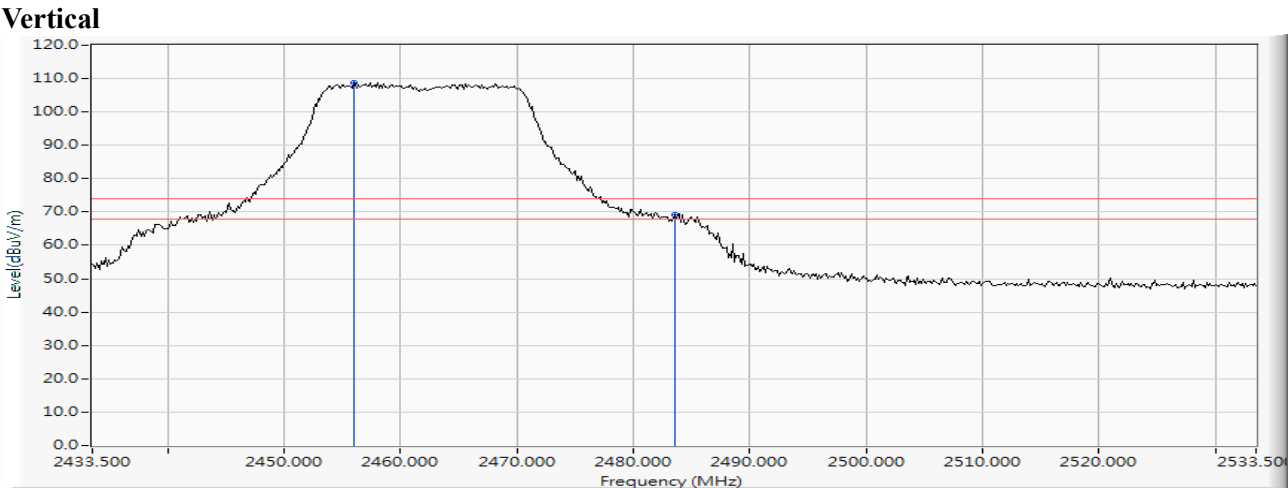

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2455.964	10.524	98.166	108.689	--	--	PEAK
2		2483.500	10.640	58.436	69.077	-4.923	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

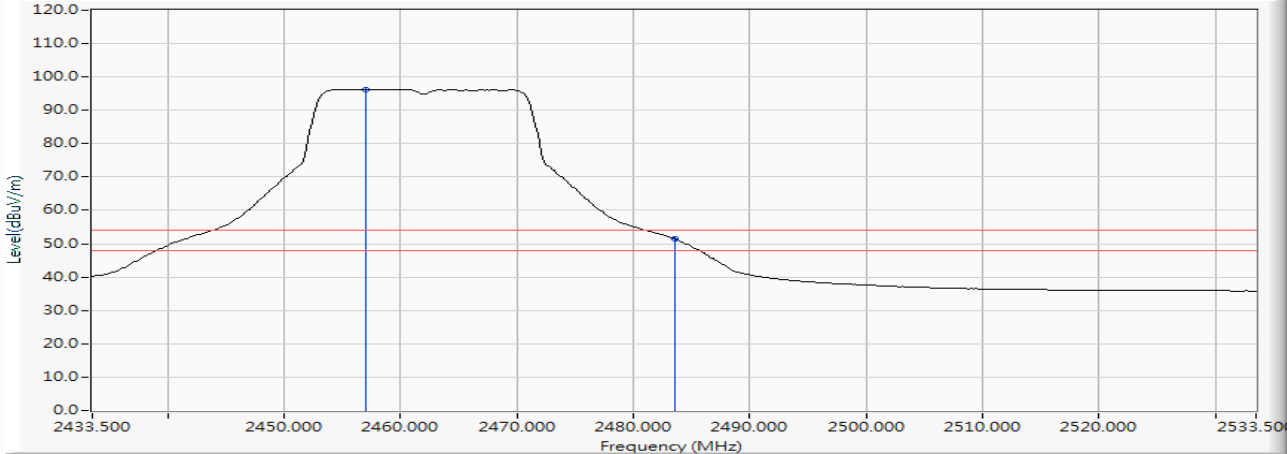

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2456.978	10.528	85.707	96.235	--	--	AVERAGE
2		2483.500	10.640	40.744	51.385	-2.615	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

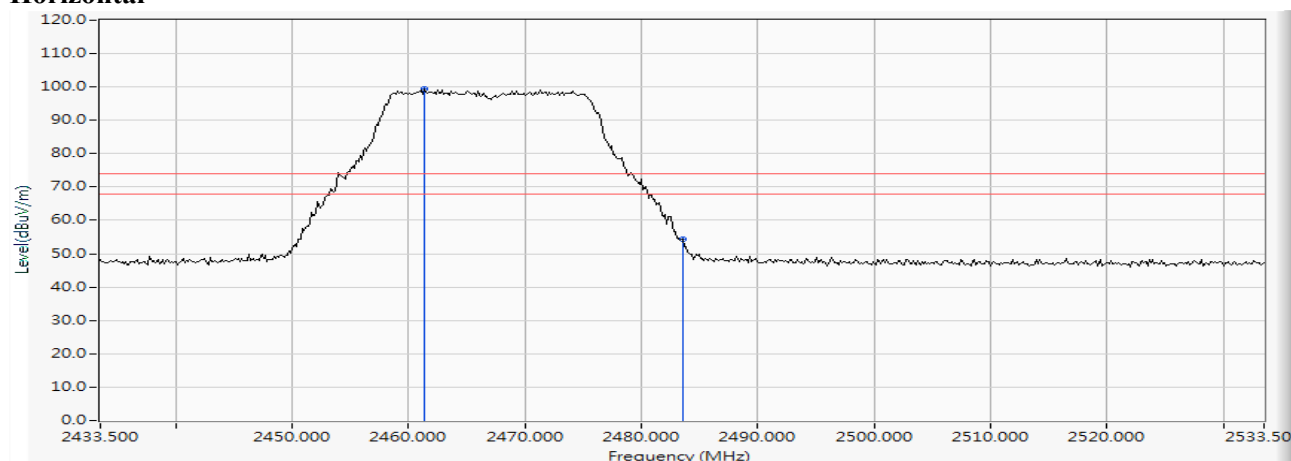Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2461.326	10.547	88.894	99.441	--	--	PEAK
2		2483.500	10.640	43.783	54.424	-19.576	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

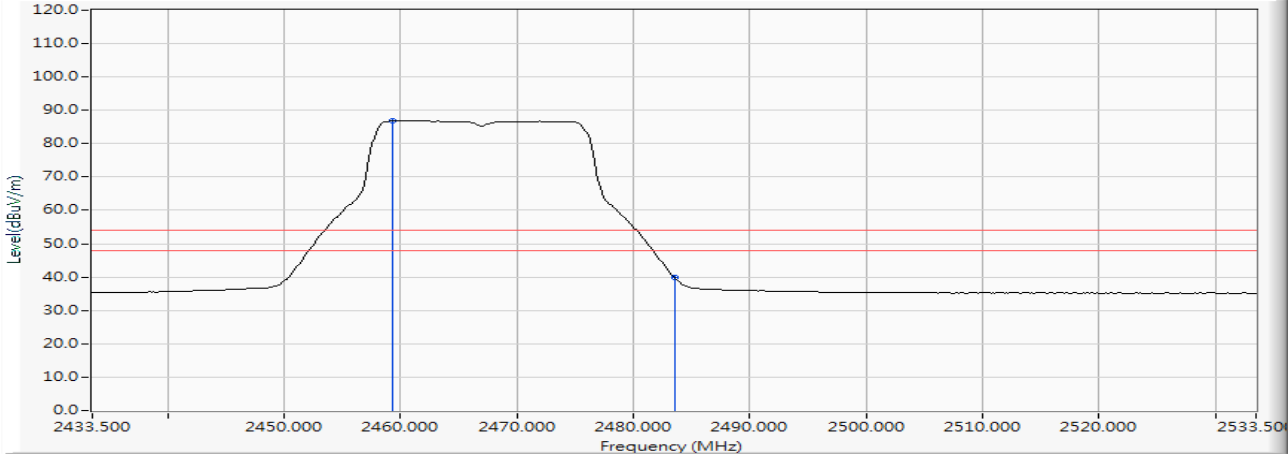

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2459.297	10.537	76.385	86.923	--	--	AVERAGE
2		2483.500	10.640	29.239	39.880	-14.120	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

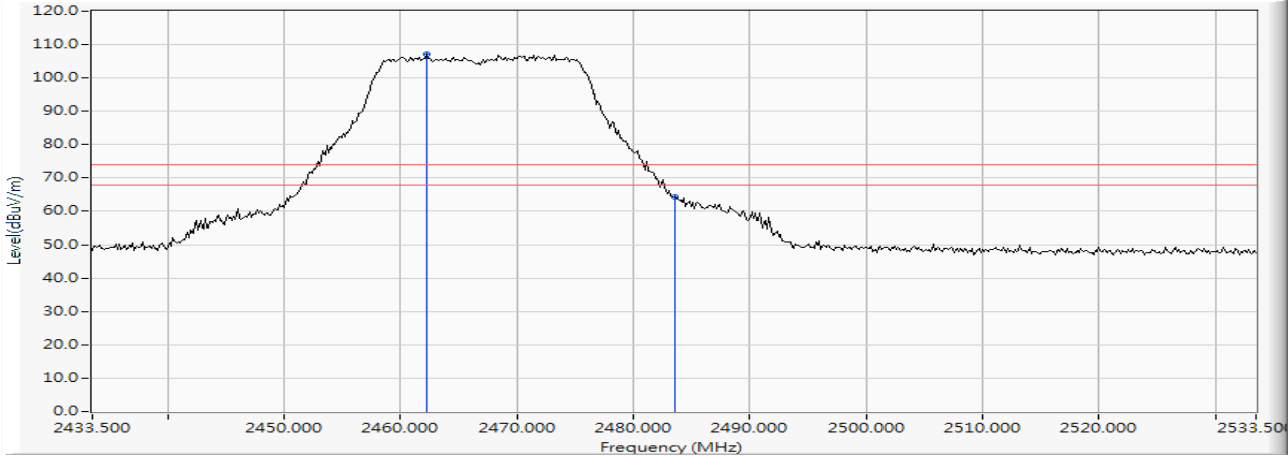

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2462.196	10.551	96.481	107.031	--	--	PEAK
2		2483.500	10.640	53.637	64.278	-9.722	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

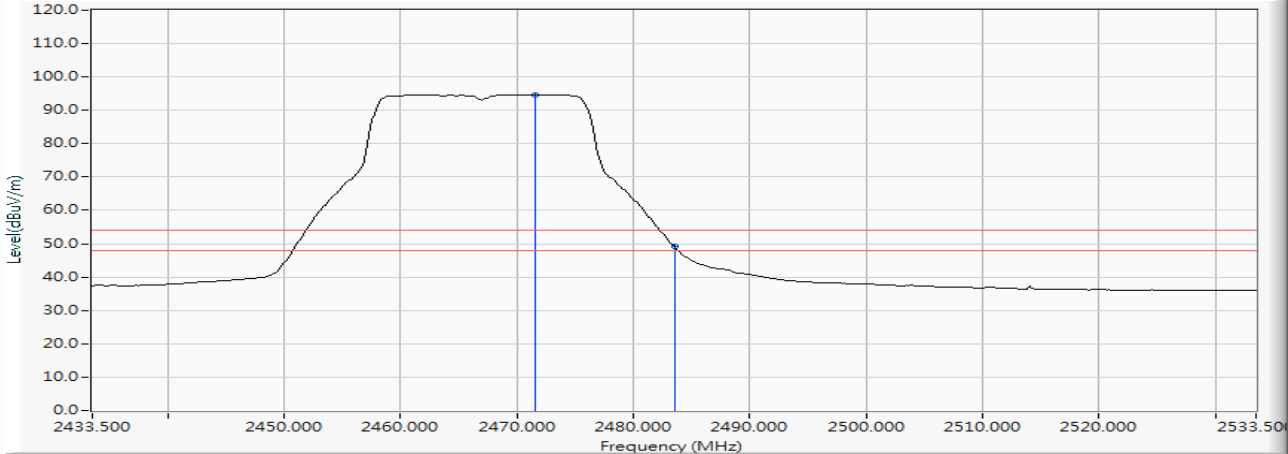

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.616	10.593	84.079	94.672	--	--	AVERAGE
2		2483.500	10.640	38.465	49.106	-4.894	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 13 (2472MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

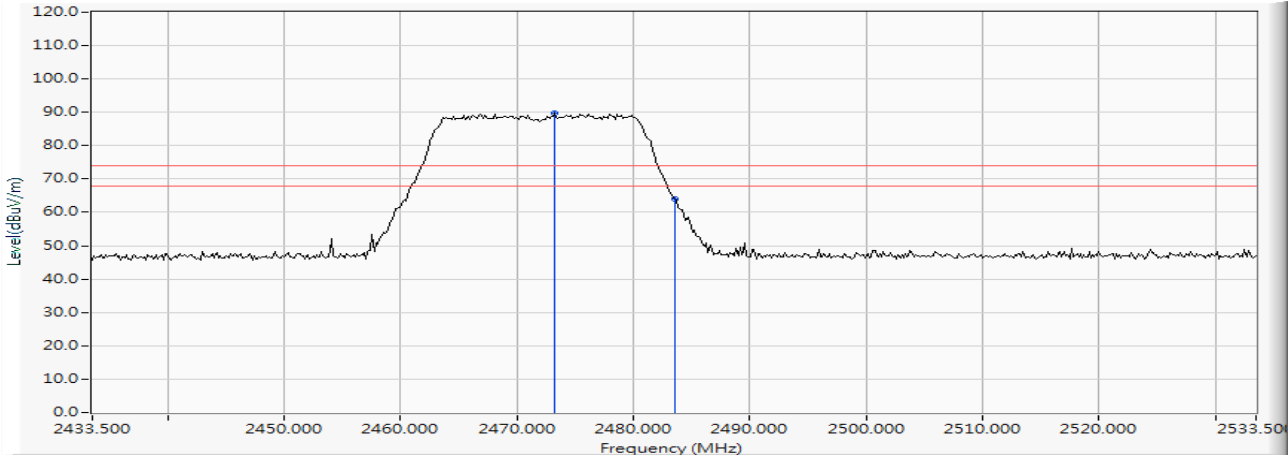

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.210	10.600	79.063	89.663	--	--	PEAK
2		2483.500	10.640	53.497	64.138	-9.862	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

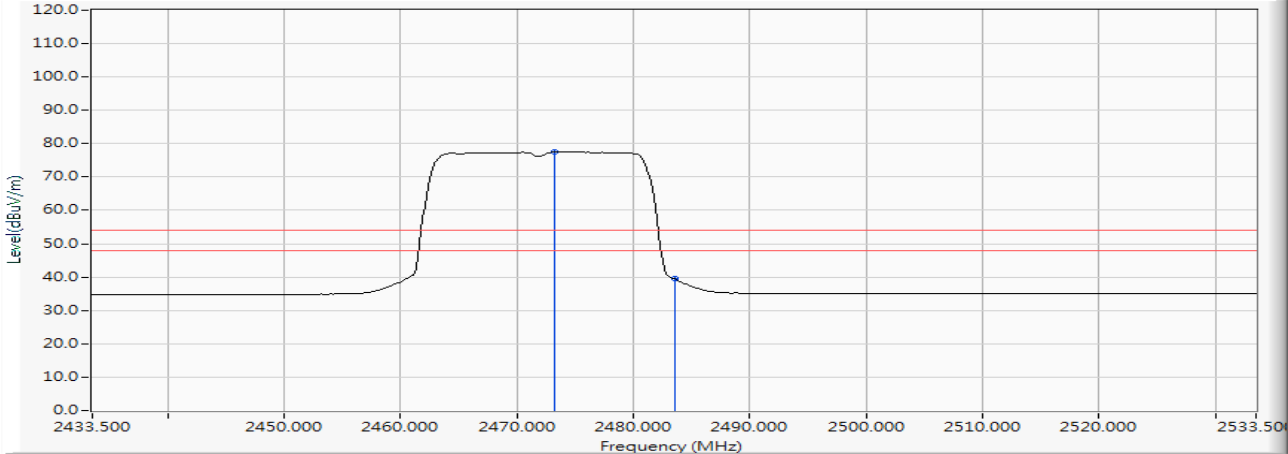

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2473.210	10.600	66.933	77.533	--	--	AVERAGE
2		2483.500	10.640	28.812	39.453	-14.547	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

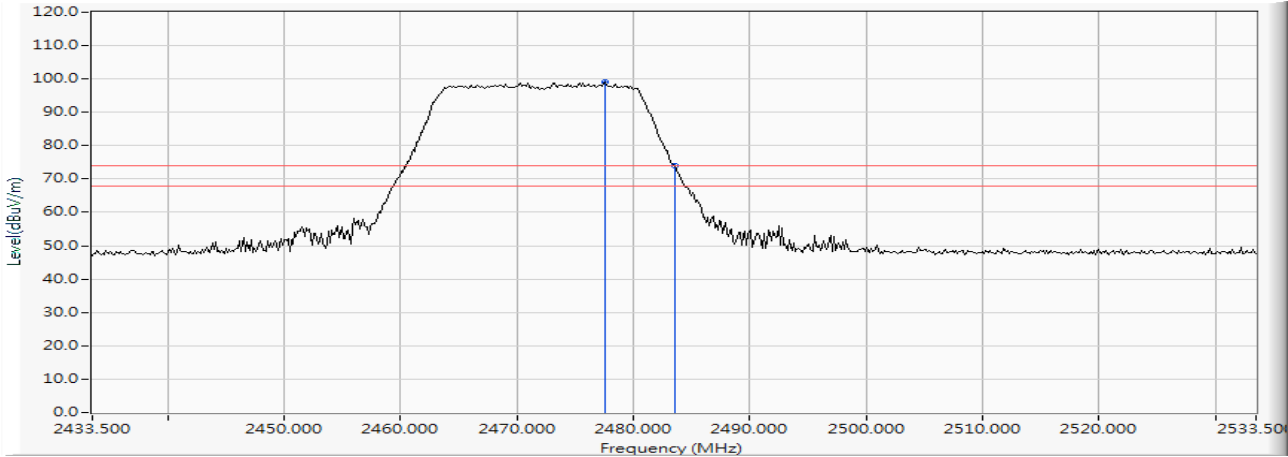

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2477.558	10.617	88.498	99.116	--	--	PEAK
2		2483.500	10.640	63.330	73.971	-0.029	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 13: MIMO: 發射器 802.11n (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

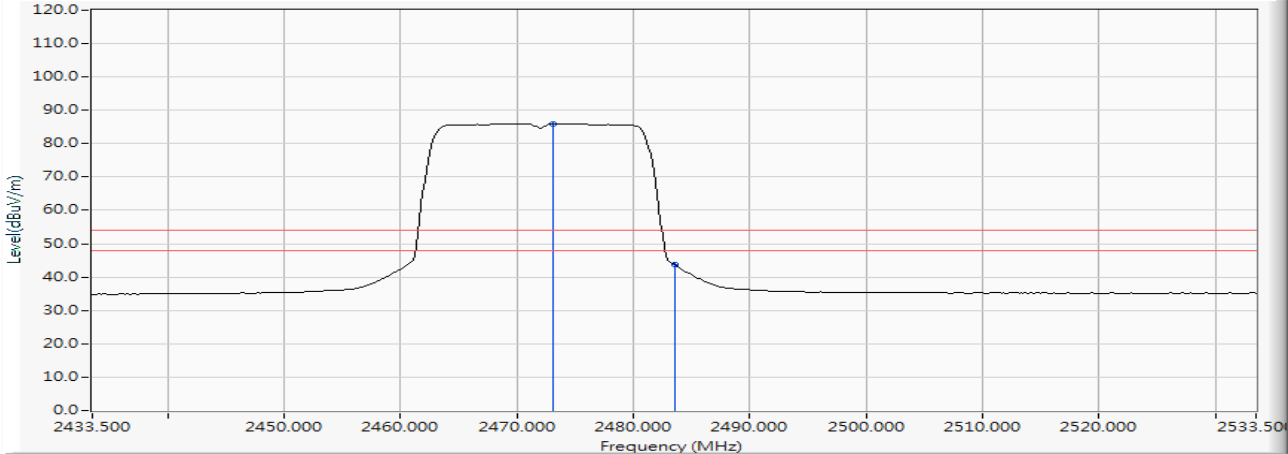

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.065	10.600	75.378	85.978	--	--	AVERAGE
2		2483.500	10.640	33.039	43.680	-10.320	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

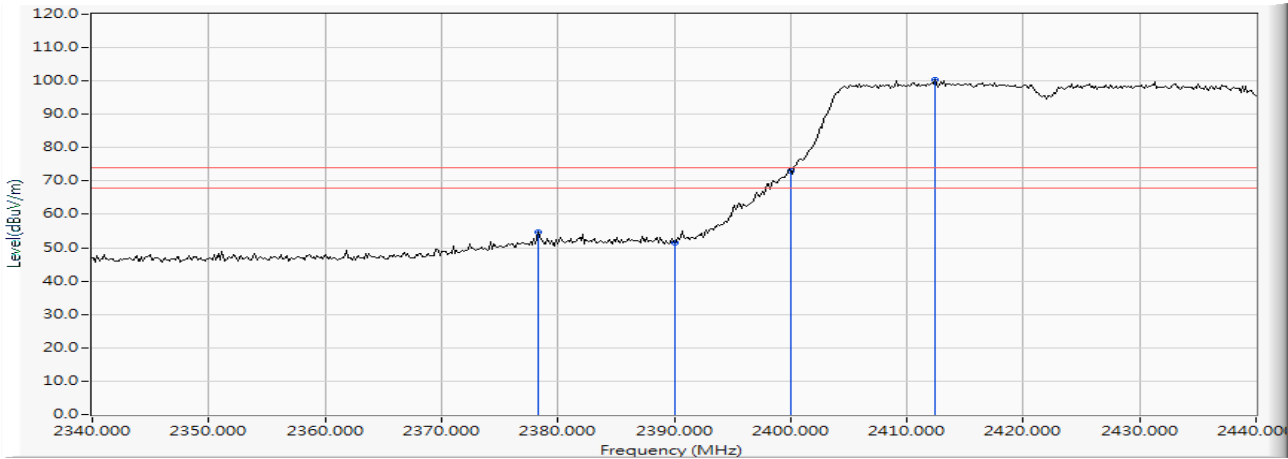

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2378.261	10.214	44.601	54.815	-19.185	74.000	PEAK
2		2390.000	10.262	41.322	51.584	-22.416	74.000	PEAK
3		2400.000	10.304	62.659	72.962	--	--	PEAK
4	*	2412.464	10.354	89.980	100.334	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

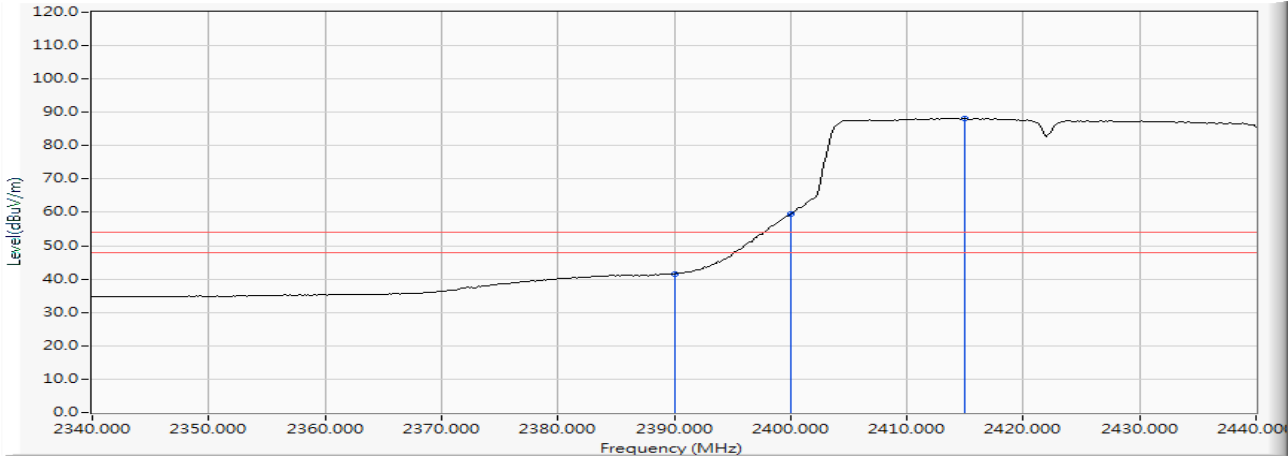

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	31.330	41.592	-12.408	54.000	AVERAGE
2		2400.000	10.304	49.233	59.536	--	--	AVERAGE
3	*	2414.928	10.364	77.817	88.181	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 03 (2422 MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

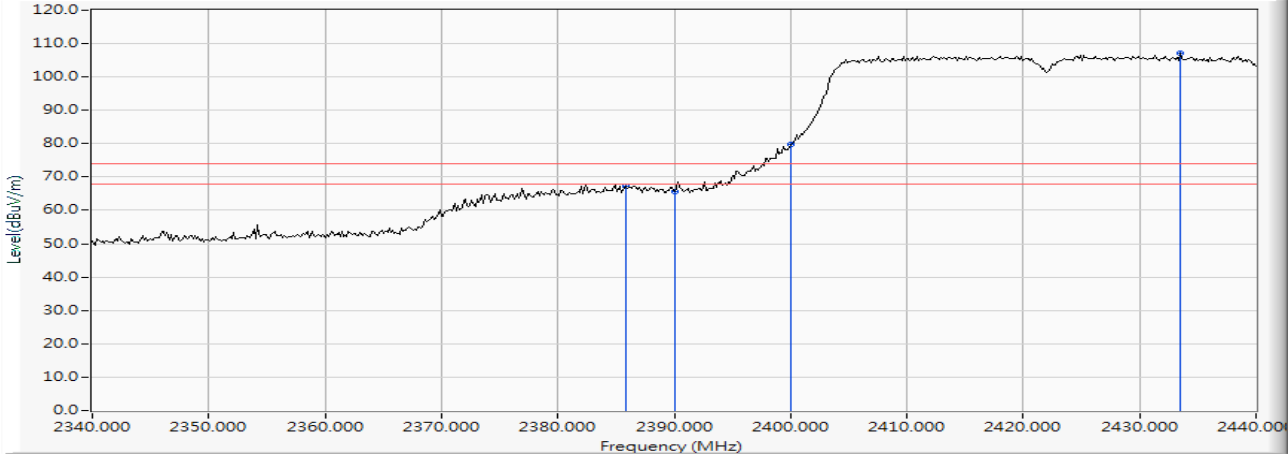

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2385.797	10.244	57.121	67.365	-6.635	74.000	PEAK
2		2390.000	10.262	55.382	65.644	-8.356	74.000	PEAK
3		2400.000	10.304	69.589	79.892	--	--	PEAK
4	*	2433.478	10.441	96.611	107.052	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

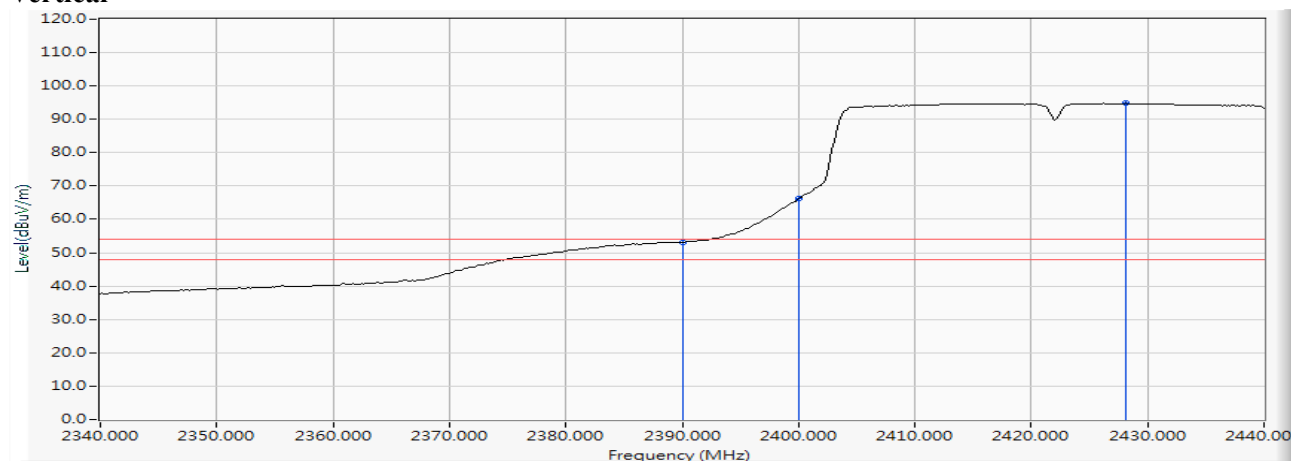Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	42.881	53.143	-0.857	54.000	AVERAGE
2		2400.000	10.304	55.856	66.159	--	--	AVERAGE
3	*	2428.116	10.418	84.354	94.773	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

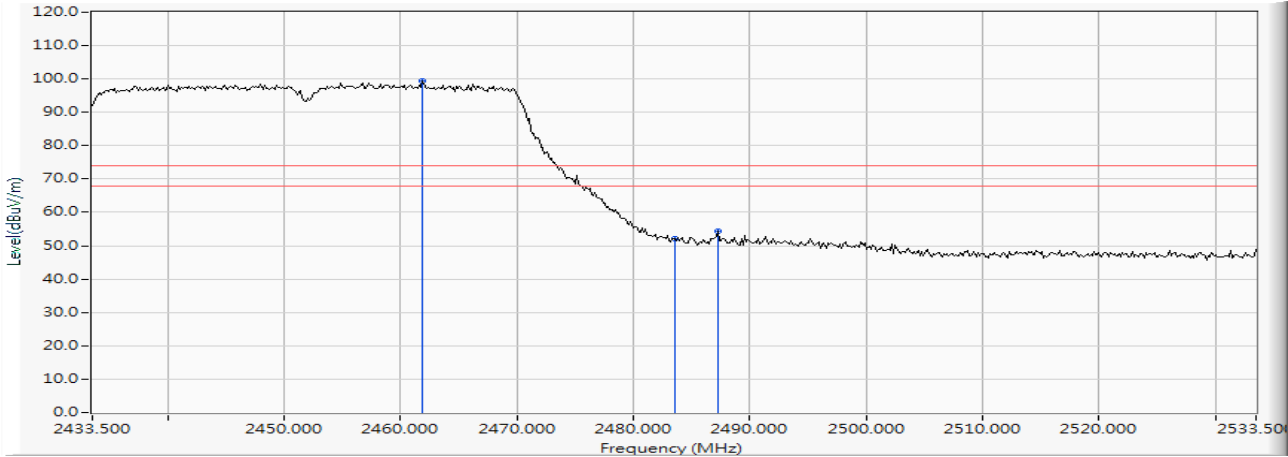

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2461.906	10.550	88.837	99.386	--	--	PEAK
2		2483.500	10.640	41.336	51.977	-22.023	74.000	PEAK
3		2487.268	10.655	43.638	54.294	-19.706	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

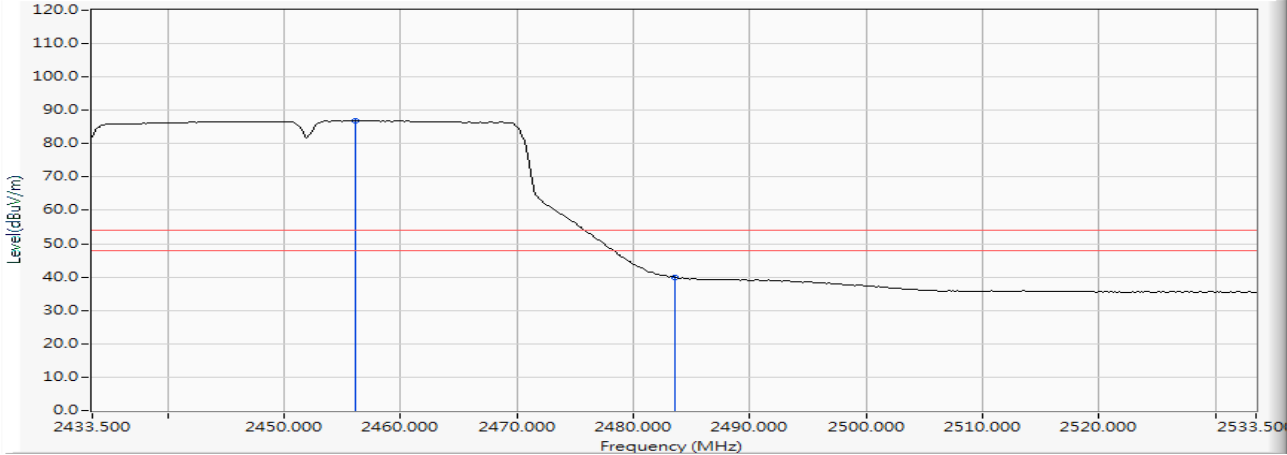


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2456.109	10.524	76.366	86.890	--	--	AVERAGE
2		2483.500	10.640	29.229	39.870	-14.130	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

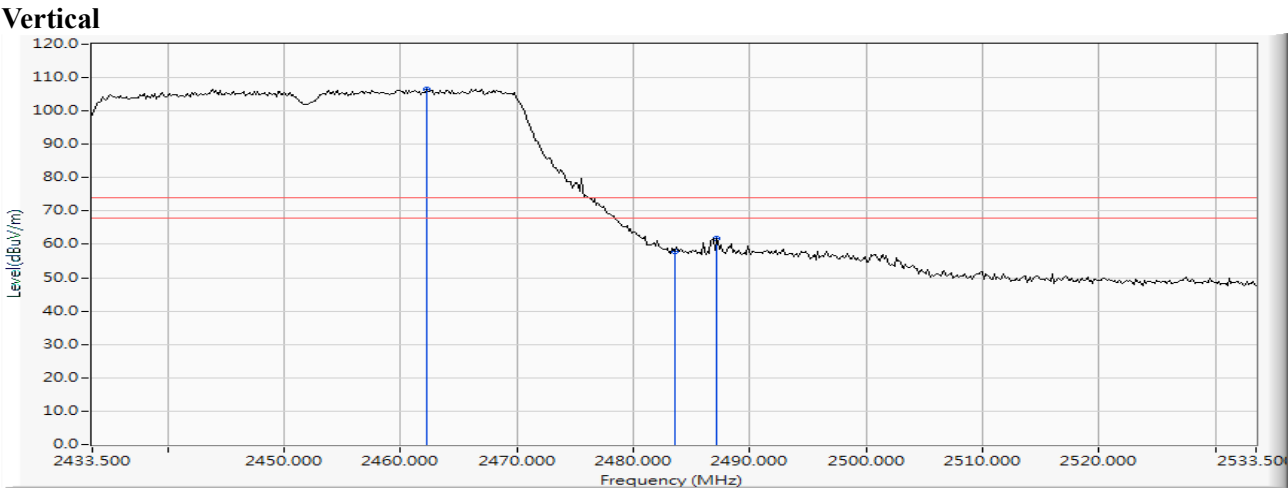

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2462.196	10.551	96.015	106.565	--	--	PEAK
2		2483.500	10.640	47.272	57.913	-16.087	74.000	PEAK
3		2487.123	10.655	51.124	61.779	-12.221	74.000	PEAK

- Note:
1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. “*”, means this data is the worst emission level.
 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

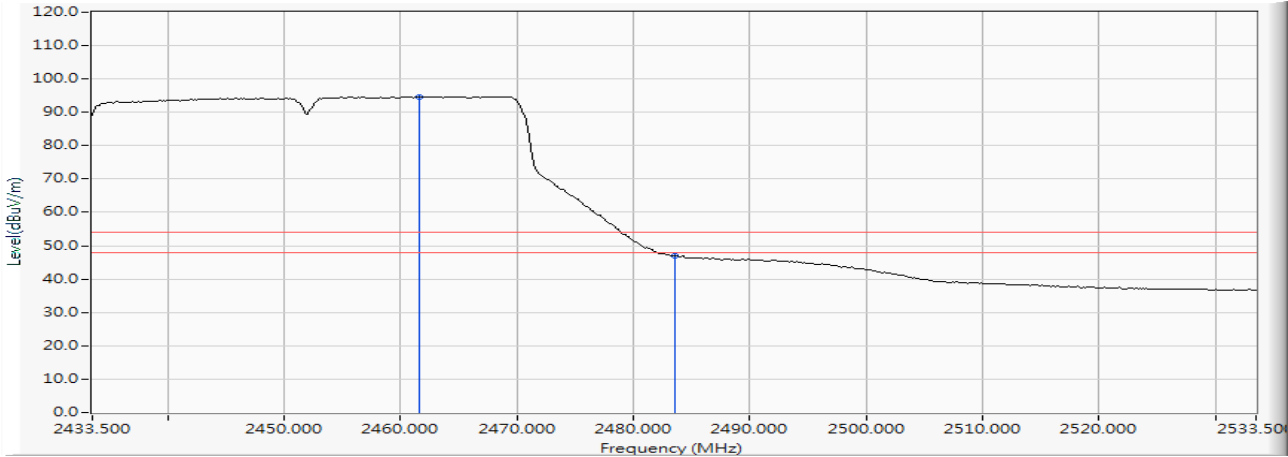

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2461.616	10.549	84.153	94.701	--	--	AVERAGE
2		2483.500	10.640	36.319	46.960	-7.040	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

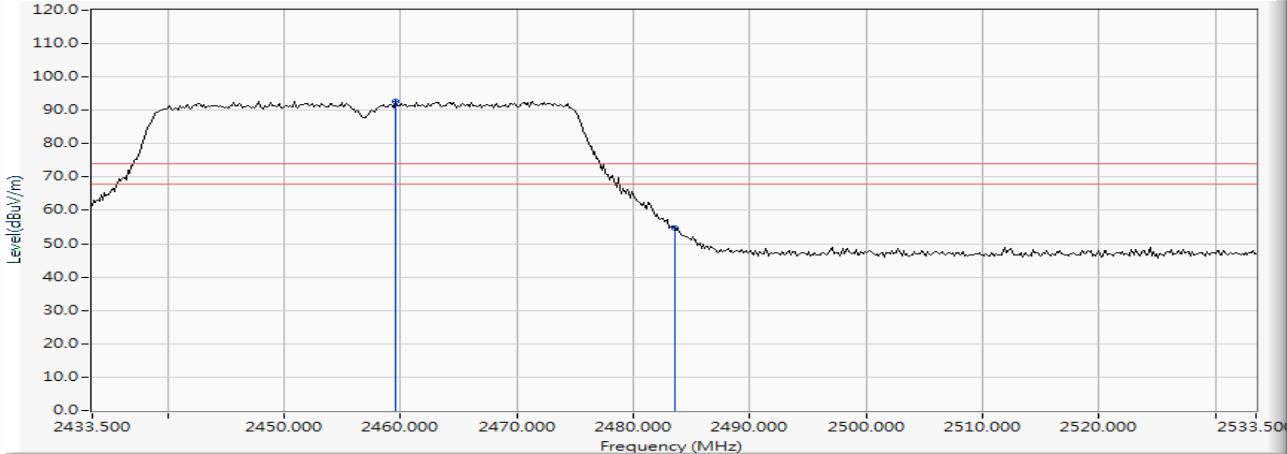

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2459.587	10.538	82.251	92.790	--	--	PEAK
2		2483.500	10.640	43.987	54.628	-19.372	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

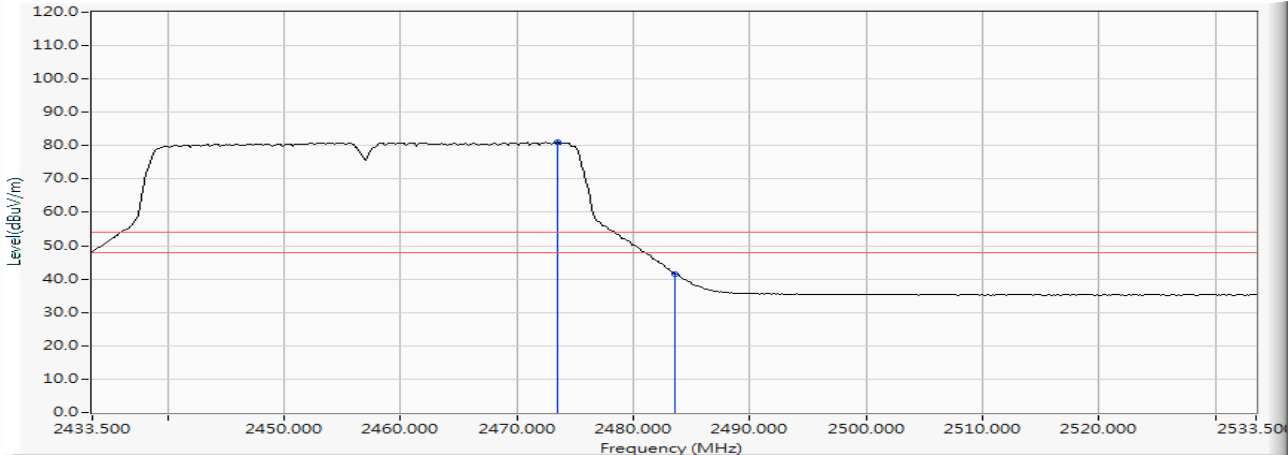

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2473.500	10.601	70.352	80.954	--	--	AVERAGE
2		2483.500	10.640	30.963	41.604	-12.396	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

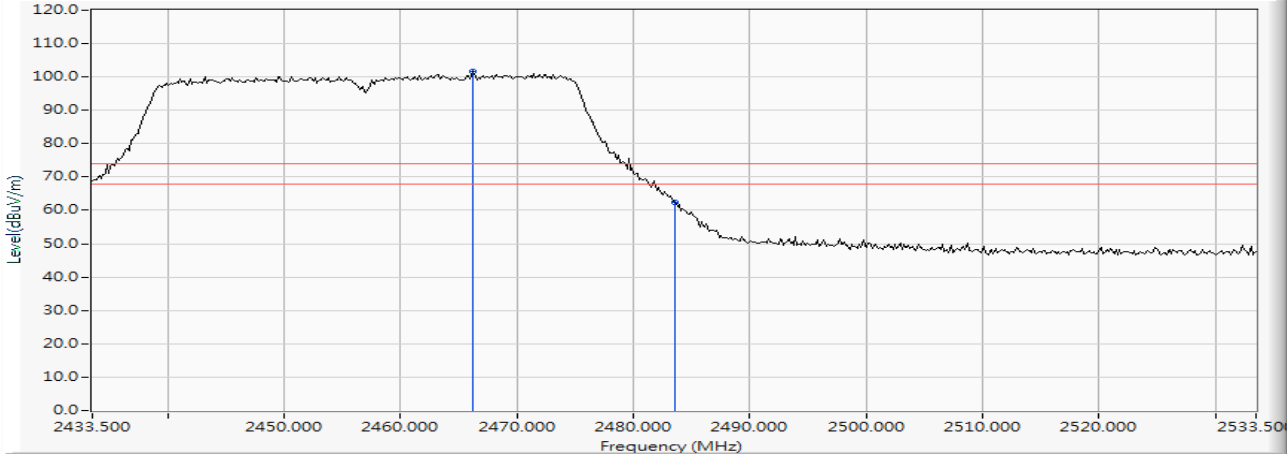

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2466.254	10.568	91.078	101.647	--	--	PEAK
2		2483.500	10.640	51.702	62.343	-11.657	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

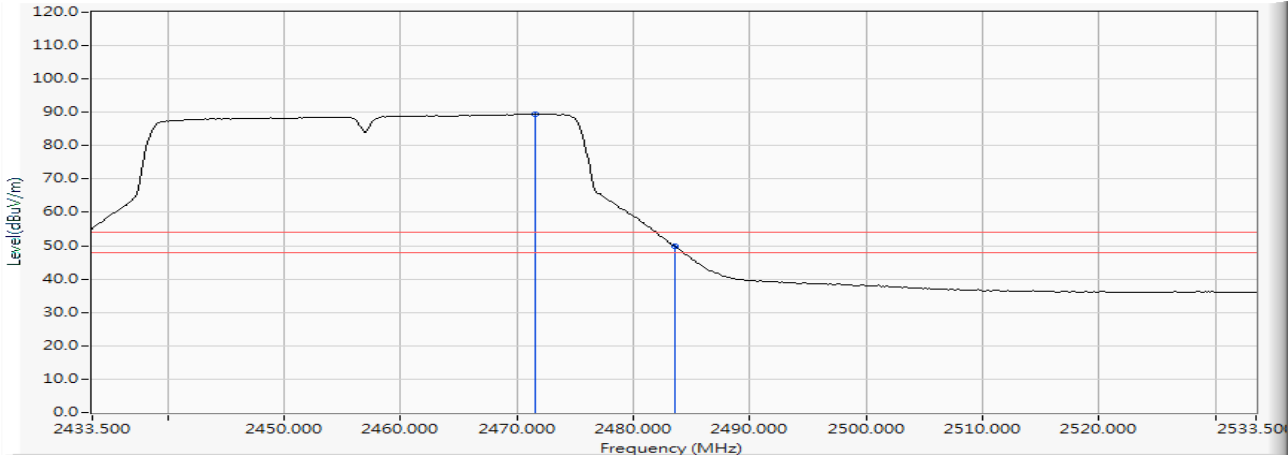

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2471.616	10.593	78.907	89.500	--	--	AVERAGE
2		2483.500	10.640	39.207	49.848	-4.152	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

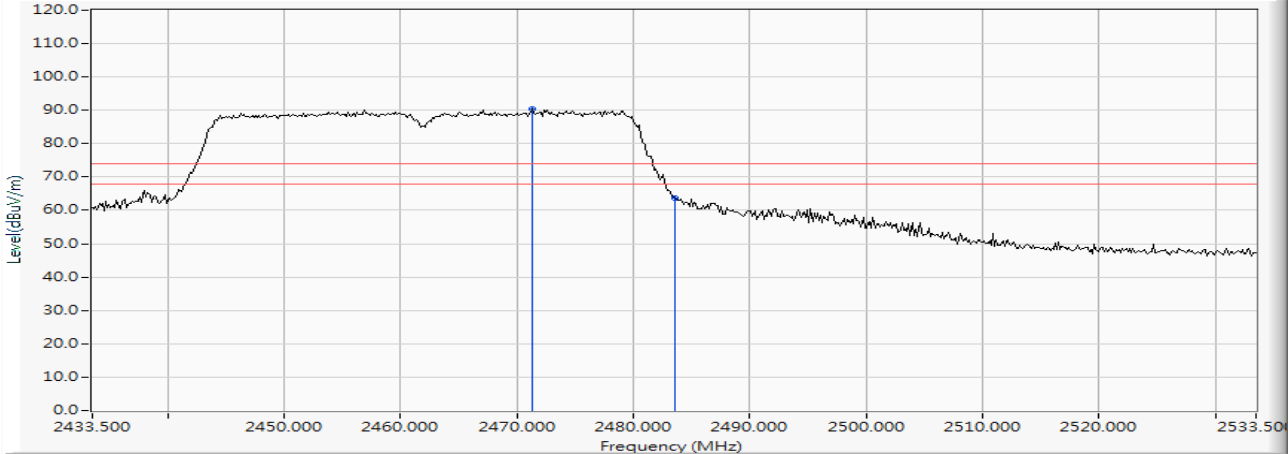

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.326	10.592	79.752	90.344	--	--	PEAK
2		2483.500	10.640	53.189	63.830	-10.170	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

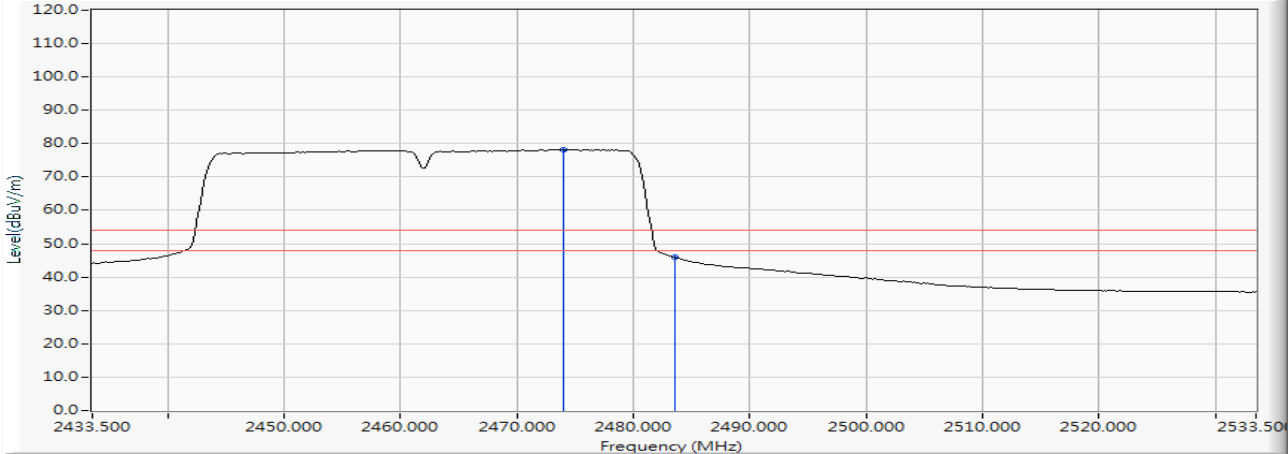


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.935	10.604	67.609	78.213	--	--	AVERAGE
2		2483.500	10.640	35.251	45.892	-8.108	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

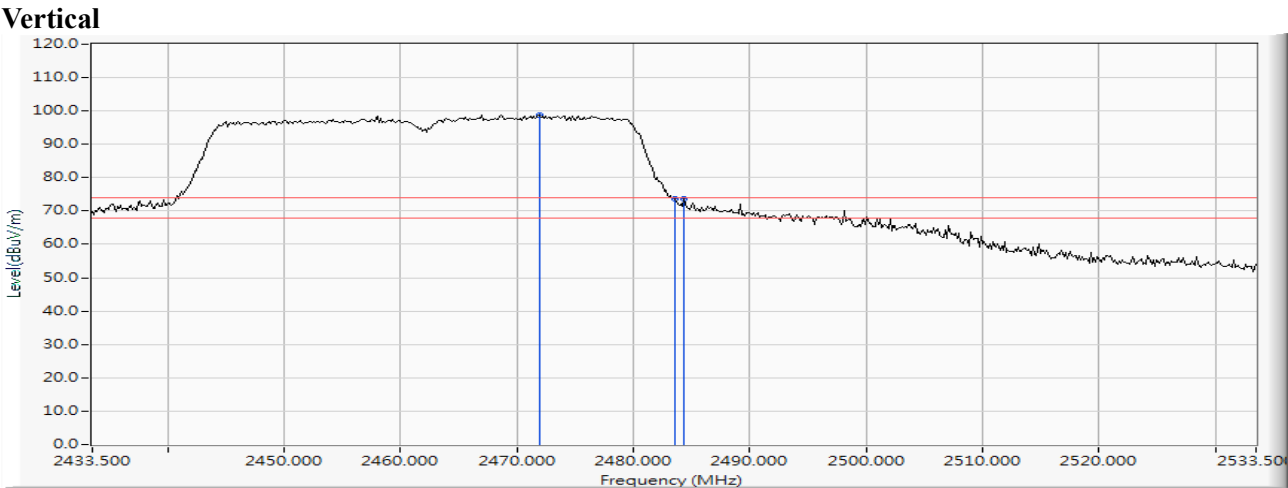


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.906	10.594	88.166	98.760	--	--	PEAK
2		2483.500	10.640	63.017	73.658	-0.342	74.000	PEAK
3		2484.370	10.645	63.017	73.662	-0.338	74.000	PEAK

- Note:
1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. “*”, means this data is the worst emission level.
 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 14: MIMO: 發射器 802.11n (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

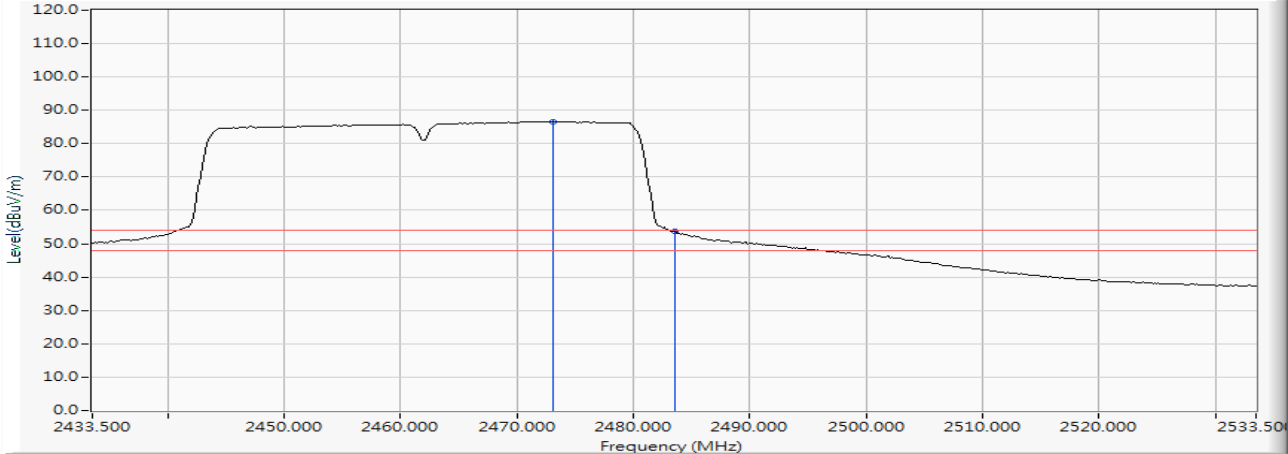

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.065	10.600	76.057	86.657	--	--	AVERAGE
2		2483.500	10.640	42.991	53.632	-0.368	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 01 (2412MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

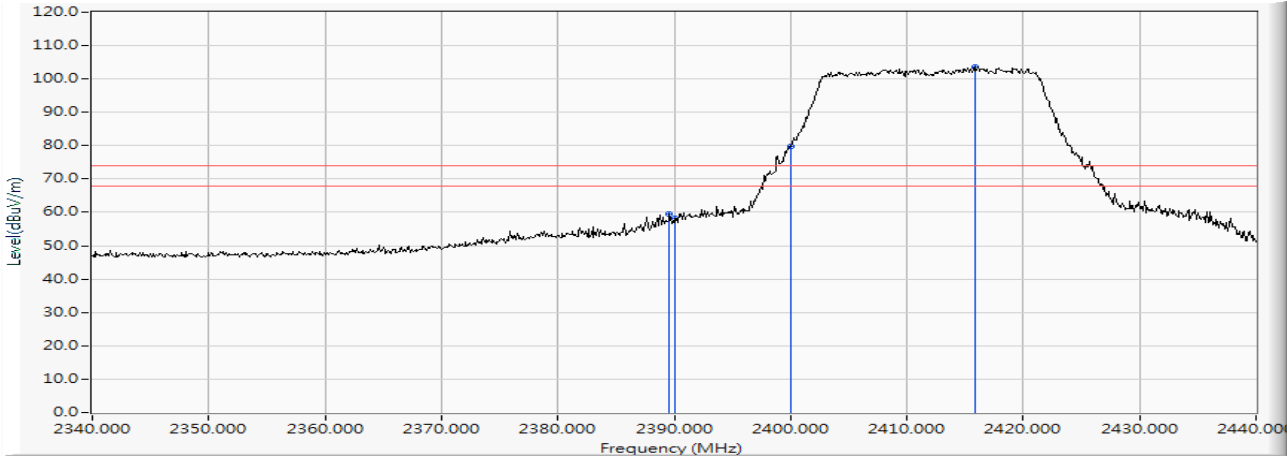

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2389.600	10.261	49.226	59.487	-14.513	74.000	PEAK
2		2390.000	10.262	47.840	58.102	-15.898	74.000	PEAK
3		2400.000	10.304	69.457	79.760	--	--	PEAK
4	*	2415.800	10.367	93.194	103.561	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 01 (2412MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

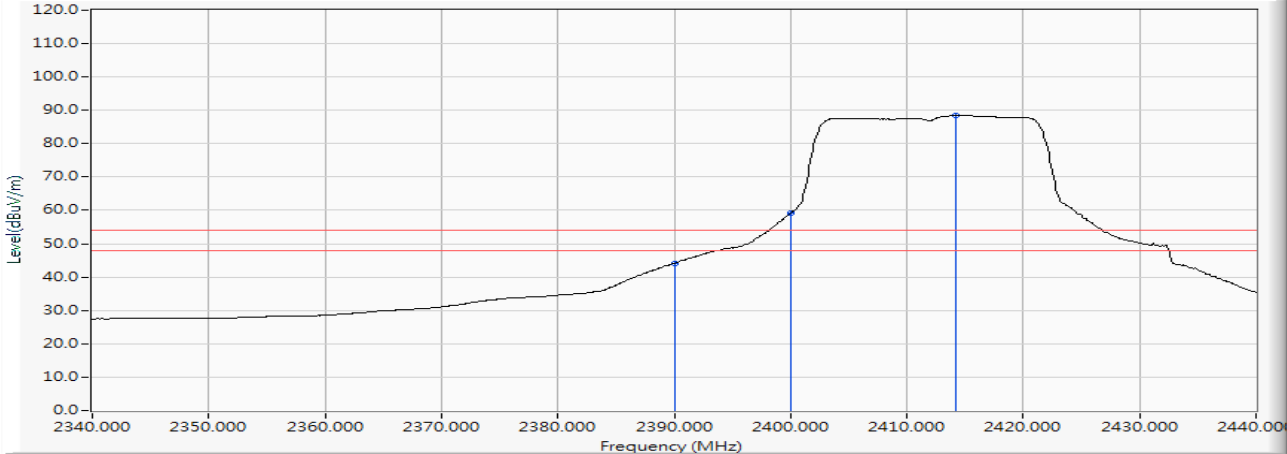

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	33.865	44.127	-9.873	54.000	AVERAGE
2		2400.000	10.304	48.826	59.129	--	--	AVERAGE
3	*	2414.200	10.360	78.069	88.430	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
 待測物型號：AX200NGW
 測試頻道：CH 01 (2412MHz)
 量測天線：3117/00203800
 檢測器：峰值 & 平均值
 測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
 測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)
 測試距離：3 M
 環境溫度：20 °C
 環境濕度：52 %

Vertical

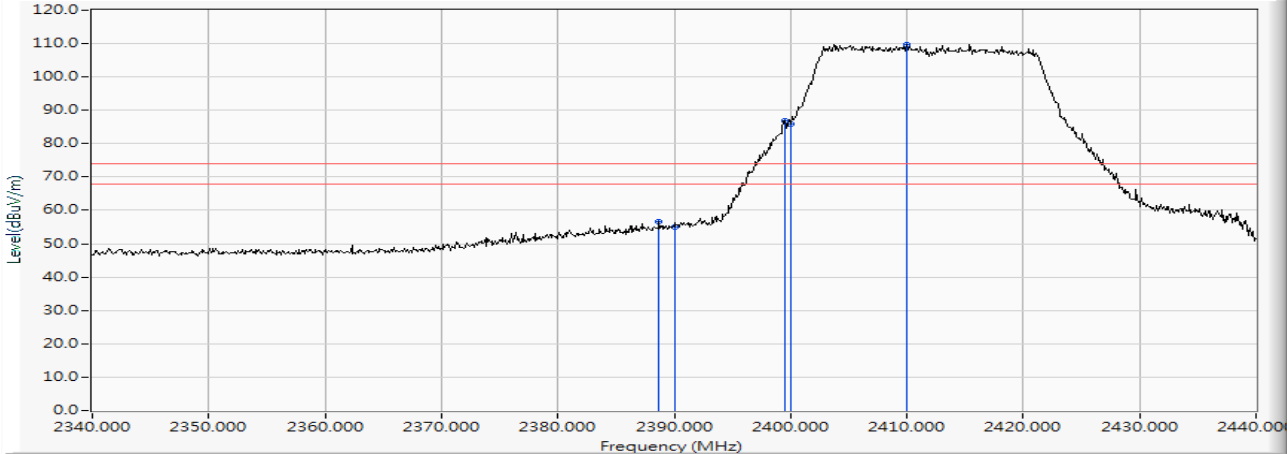

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2388.700	10.257	46.421	56.678	-17.322	74.000	PEAK
2		2390.000	10.262	44.656	54.918	-19.082	74.000	PEAK
3		2399.500	10.301	76.513	86.814	--	--	PEAK
4		2400.000	10.304	75.666	85.969	--	--	PEAK
5	*	2410.000	10.344	99.378	109.722	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 01 (2412MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

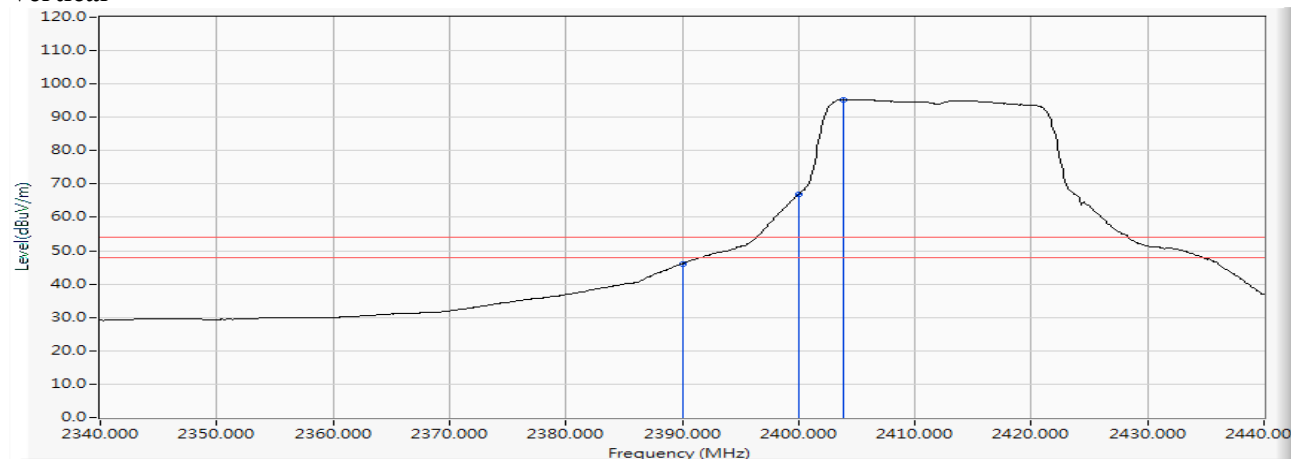Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	35.870	46.132	-7.868	54.000	AVERAGE
2		2400.000	10.304	56.516	66.819	--	--	AVERAGE
3	*	2403.800	10.319	85.063	95.382	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

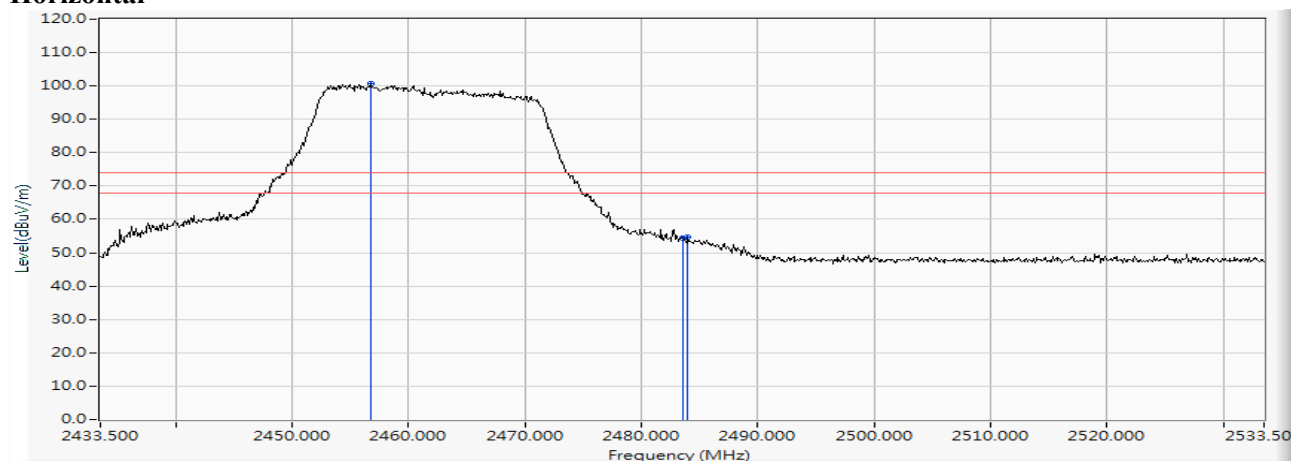Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2456.700	10.526	90.025	100.551	--	--	PEAK
2		2483.500	10.640	43.584	54.225	-19.775	74.000	PEAK
3		2484.000	10.644	44.038	54.681	-19.319	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

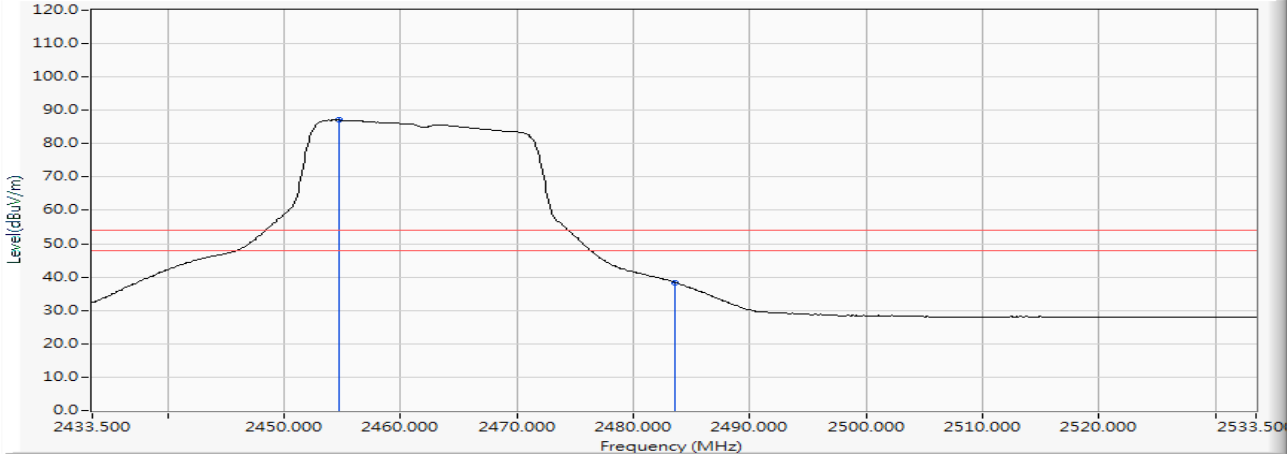

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2454.700	10.518	76.559	87.077	--	--	AVERAGE
2		2483.500	10.640	27.769	38.410	-15.590	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

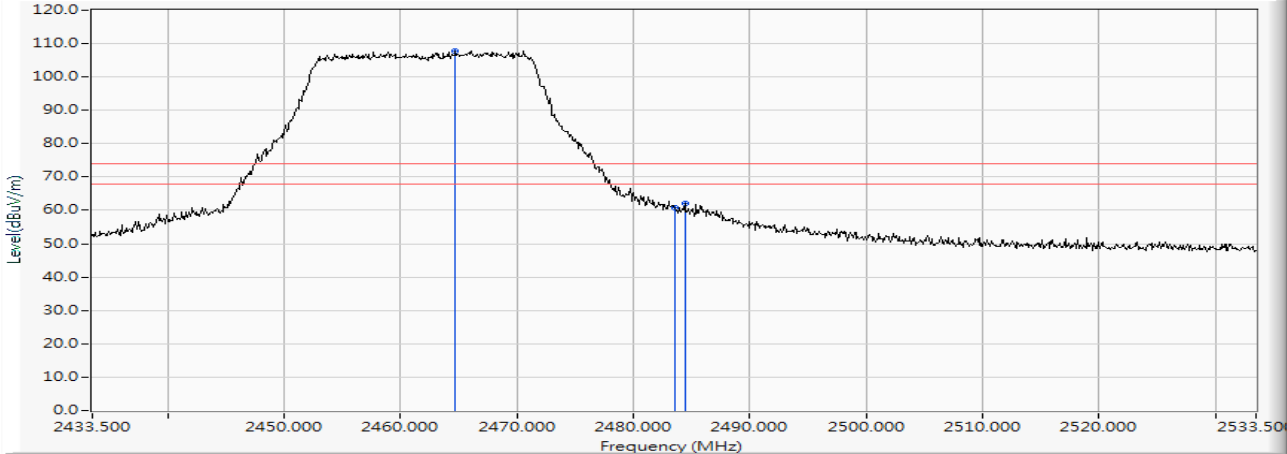

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2464.700	10.562	97.366	107.928	--	--	PEAK
2		2483.500	10.640	50.285	60.926	-13.074	74.000	PEAK
3		2484.400	10.645	51.320	61.965	-12.035	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108年04月03日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

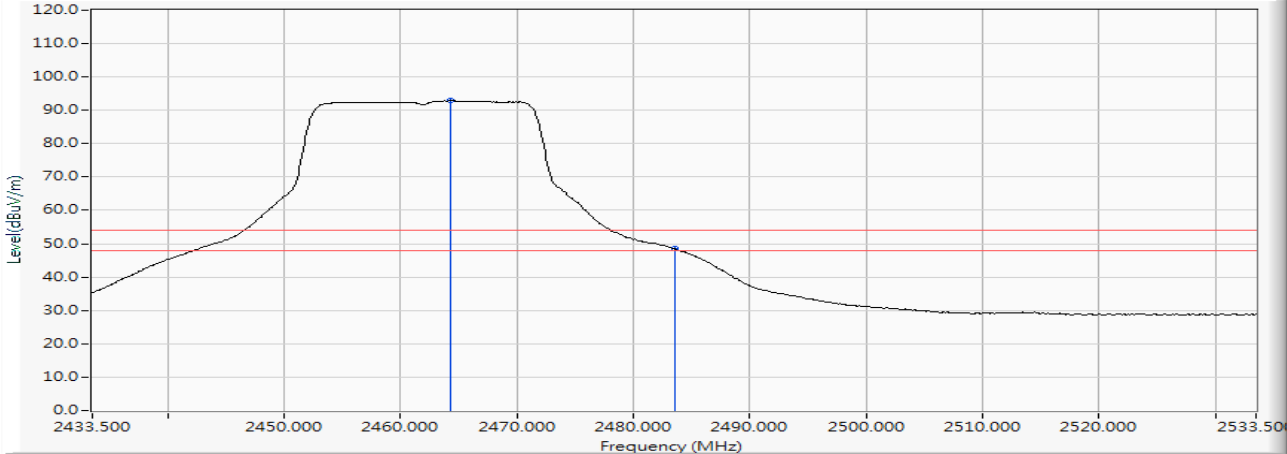

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2464.300	10.559	82.283	92.843	--	--	AVERAGE
2		2483.500	10.640	37.796	48.437	-5.563	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

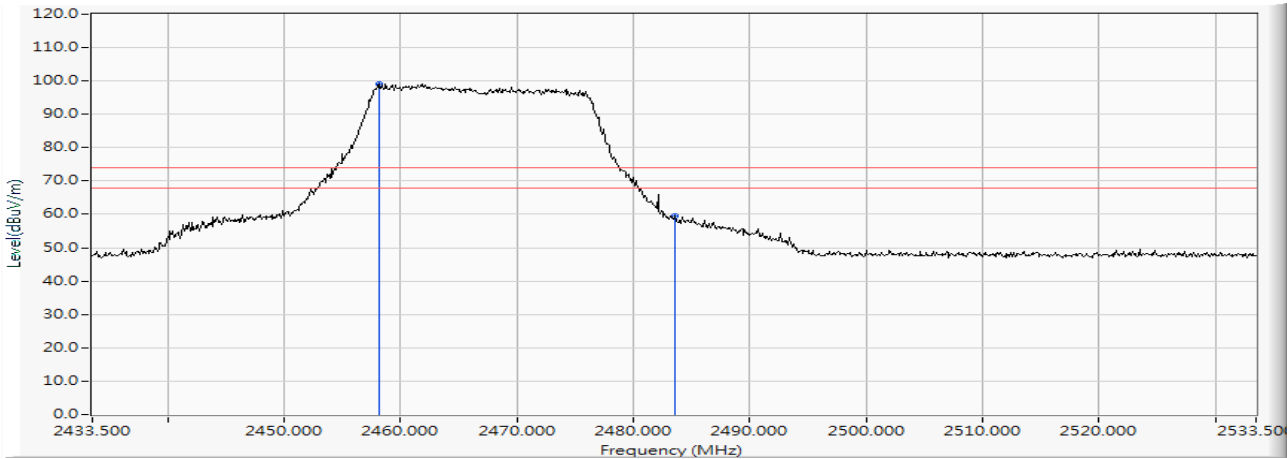

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2458.100	10.533	88.516	99.048	--	--	PEAK
2		2483.500	10.640	48.827	59.468	-14.532	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

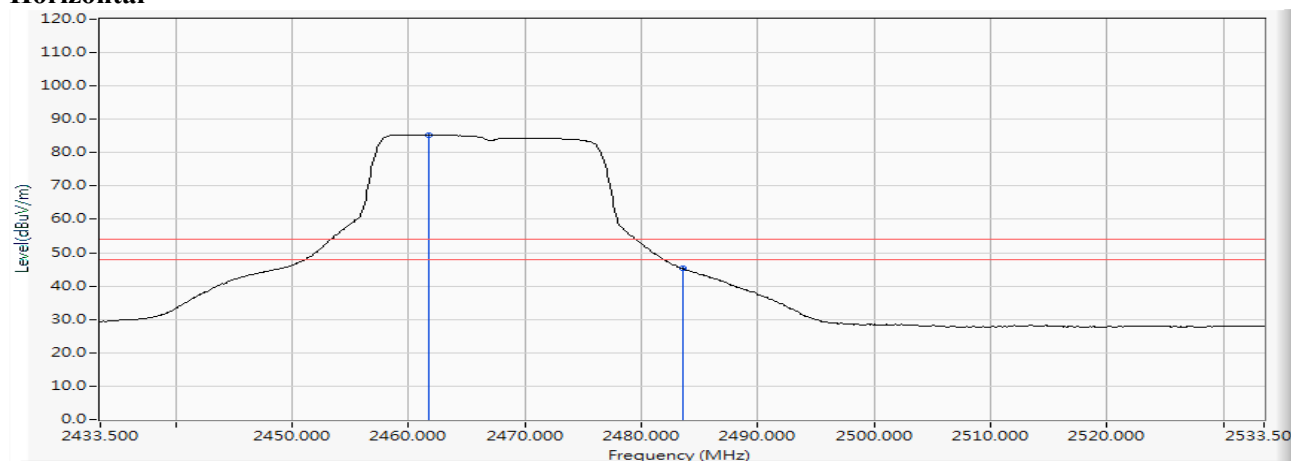Horizontal


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2461.700	10.549	74.787	85.335	--	--	AVERAGE
2		2483.500	10.640	34.577	45.218	-8.782	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

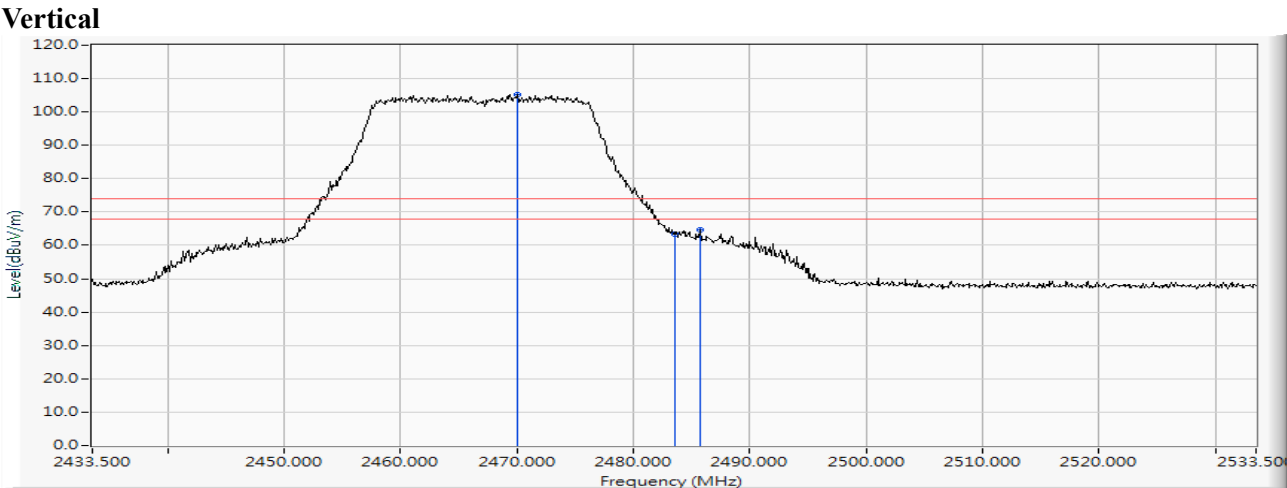

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.000	10.585	94.674	105.260	--	--	PEAK
2		2483.500	10.640	52.722	63.363	-10.637	74.000	PEAK
3		2485.700	10.650	53.933	64.583	-9.417	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

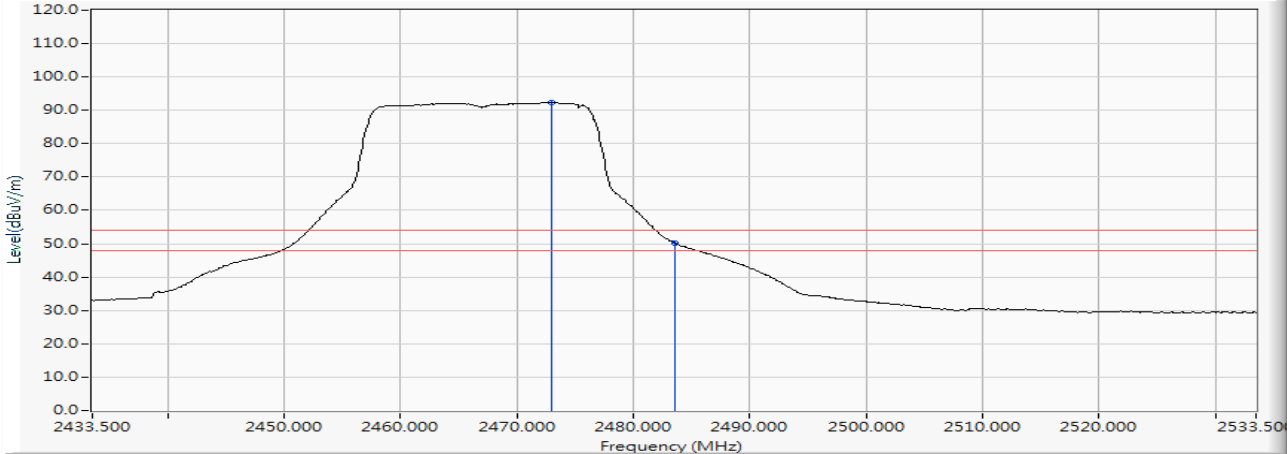

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2472.900	10.599	81.727	92.326	--	--	AVERAGE
2		2483.500	10.640	39.592	50.233	-3.767	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 13 (2472MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108年04月03日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

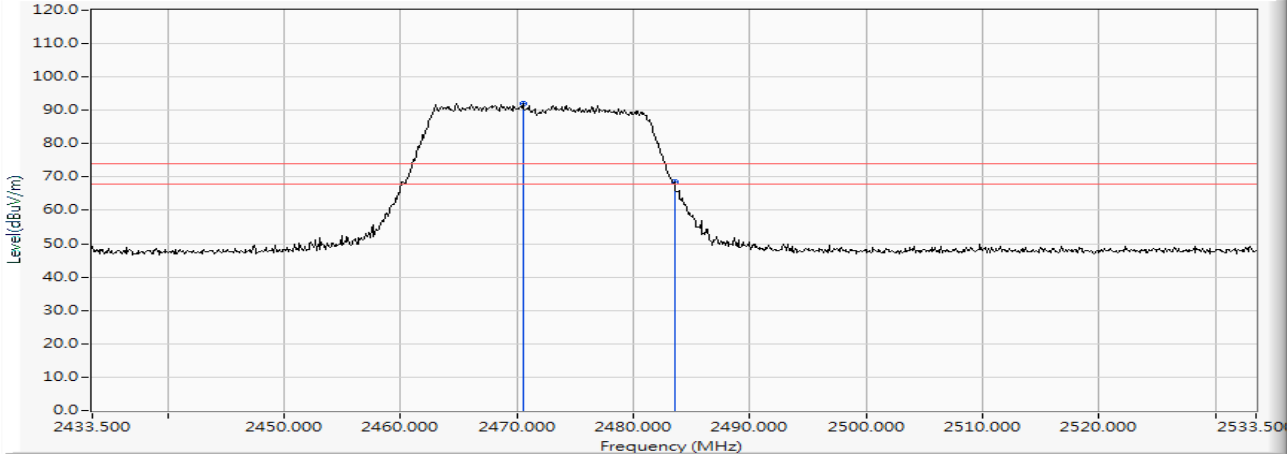

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.500	10.588	81.353	91.941	--	--	PEAK
2		2483.500	10.640	57.727	68.368	-5.632	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 13 (2472MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

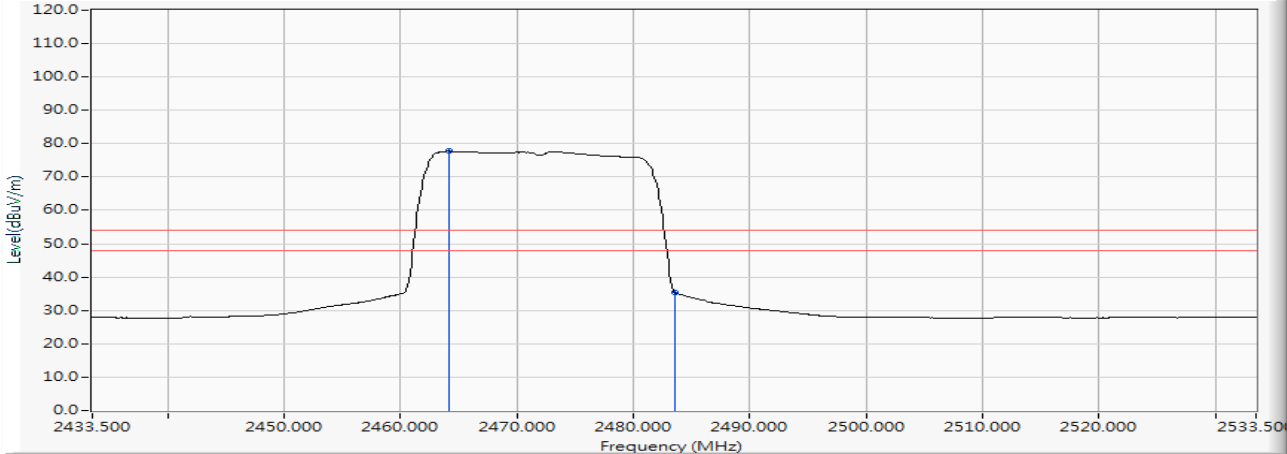

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2464.100	10.559	67.160	77.719	--	--	AVERAGE
2		2483.500	10.640	24.902	35.543	-18.457	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 13 (2472MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

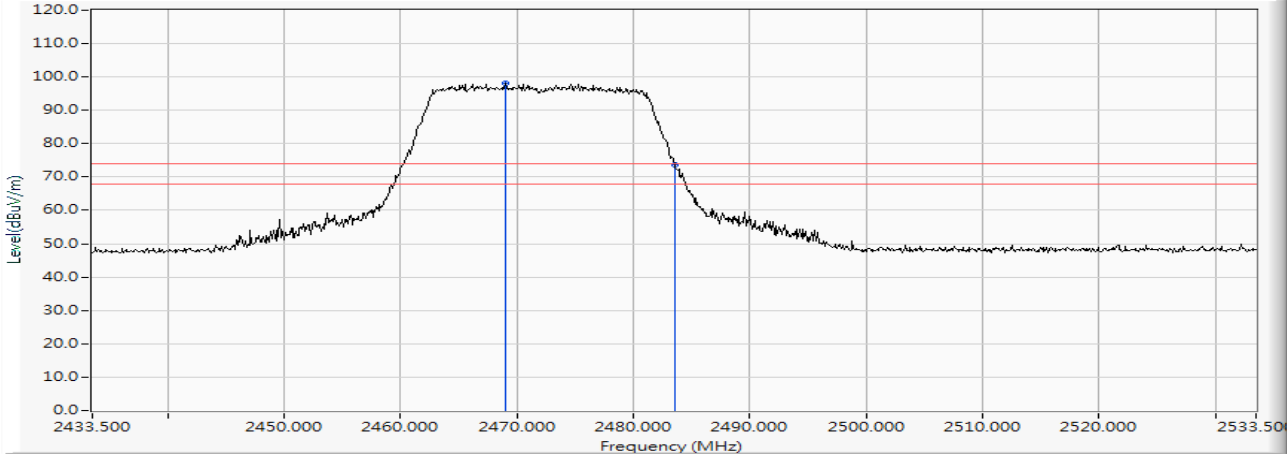

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2469.000	10.581	87.430	98.011	--	--	PEAK
2		2483.500	10.640	63.189	73.830	-0.170	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 5: SISO A: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

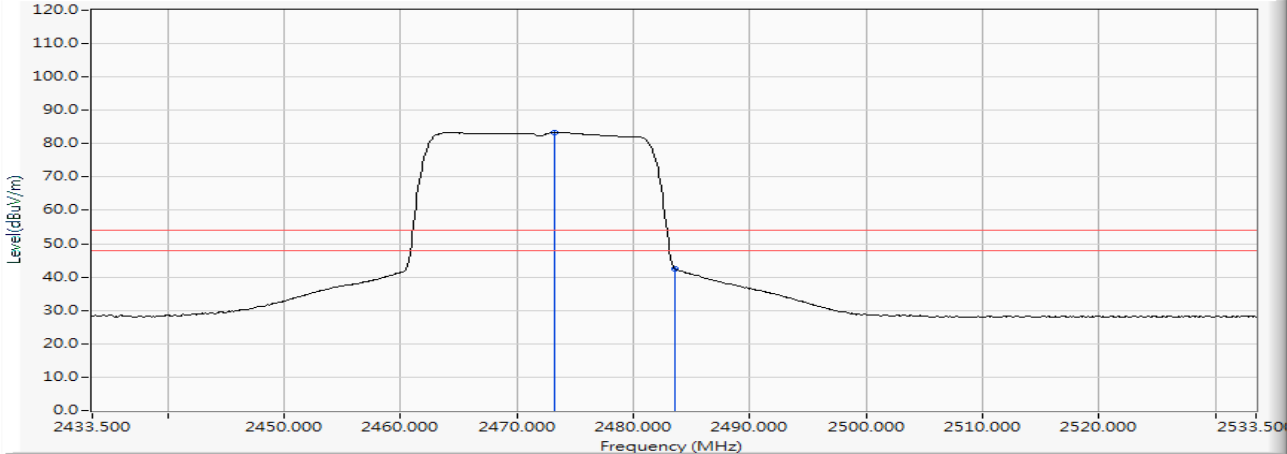

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.200	10.600	72.714	83.314	--	--	AVERAGE
2		2483.500	10.640	31.932	42.573	-11.427	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

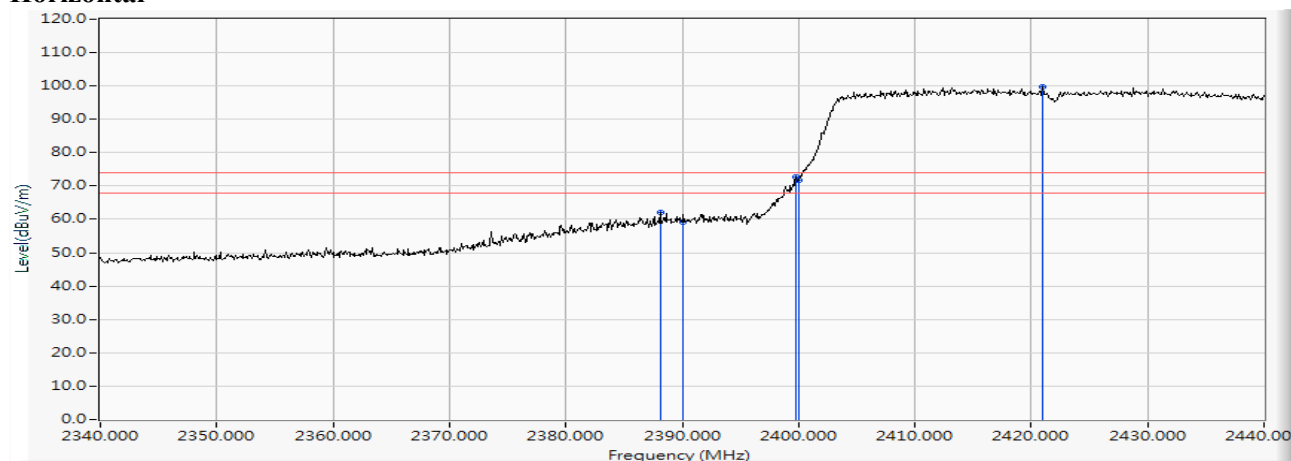Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2388.100	10.254	51.818	62.072	-11.928	74.000	PEAK
2		2390.000	10.262	48.970	59.232	-14.768	74.000	PEAK
3		2399.800	10.302	62.263	72.566	--	--	PEAK
4		2400.000	10.304	61.479	71.782	--	--	PEAK
5	*	2421.000	10.387	89.184	99.572	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

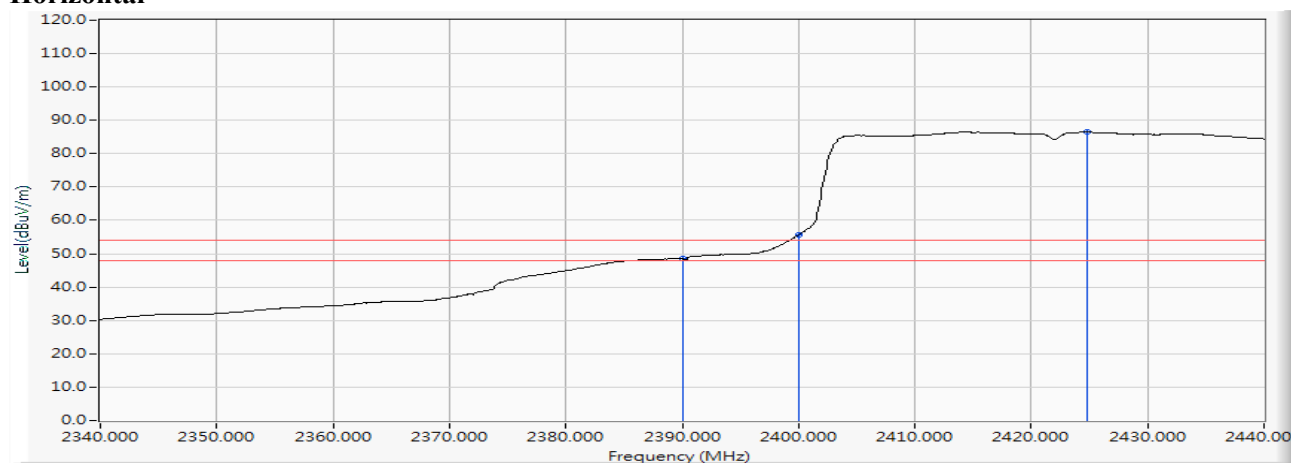Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	38.180	48.442	-5.558	54.000	AVERAGE
2		2400.000	10.304	45.408	55.711	--	--	AVERAGE
3	*	2424.800	10.404	76.032	86.436	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
 待測物型號：AX200NGW
 測試頻道：CH 03 (2422 MHz)
 量測天線：3117/00203800
 檢測器：峰值 & 平均值
 測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
 測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
 測試距離：3 M
 環境溫度：20 °C
 環境濕度：52 %

Vertical

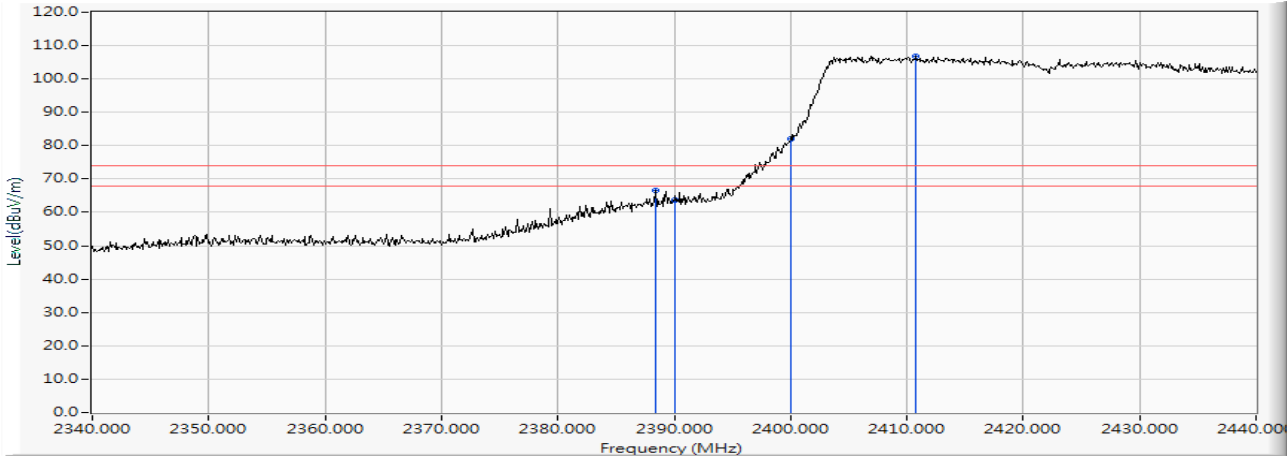

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2388.400	10.256	56.199	66.454	-7.546	74.000	PEAK
2		2390.000	10.262	53.345	63.607	-10.393	74.000	PEAK
3		2400.000	10.304	71.738	82.041	--	--	PEAK
4	*	2410.800	10.347	96.504	106.851	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 03 (2422 MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

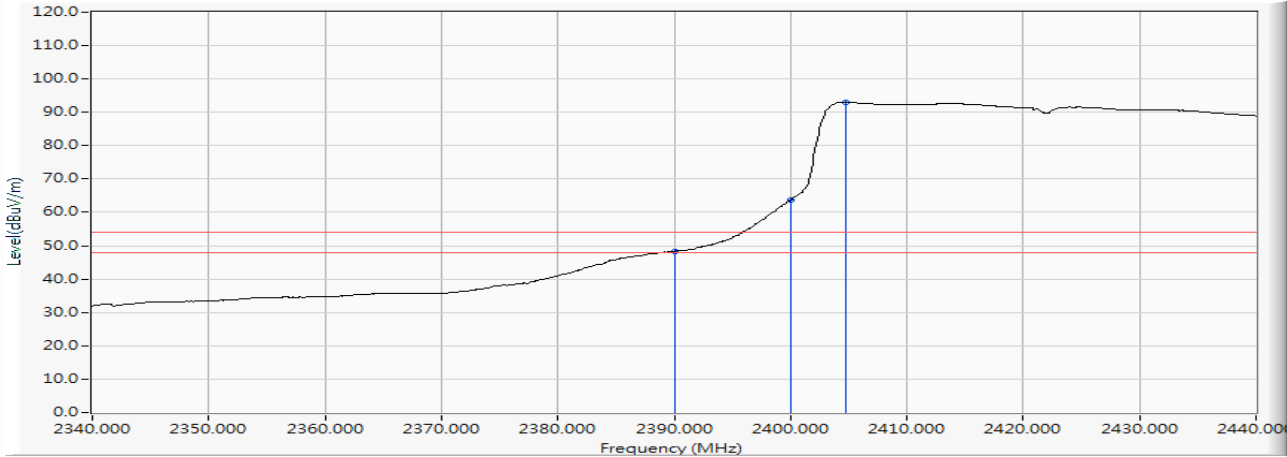

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1		2390.000	10.262	38.151	48.413	-5.587	54.000	AVERAGE
2		2400.000	10.304	53.388	63.691	--	--	AVERAGE
3	*	2404.800	10.323	82.606	92.929	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

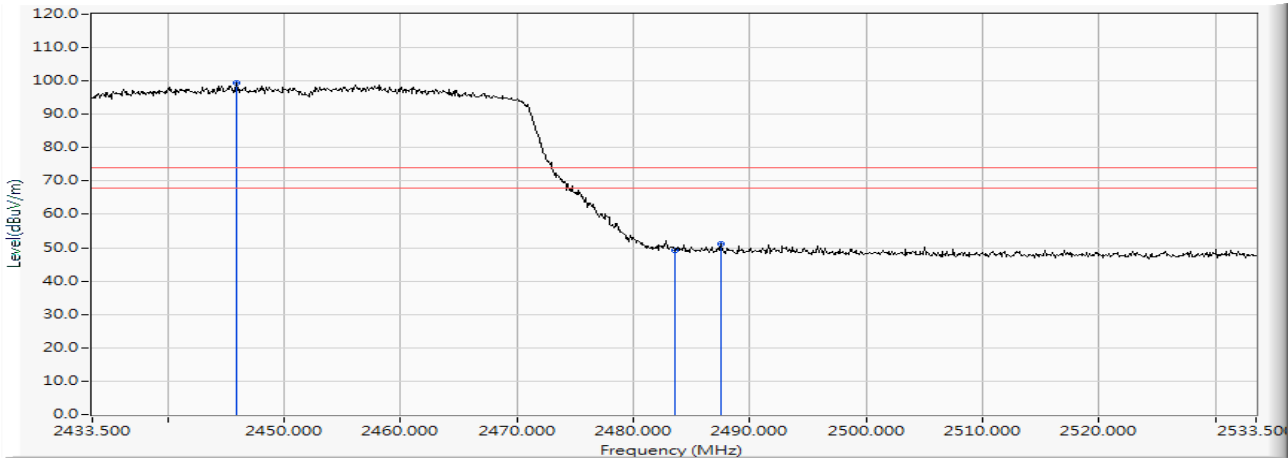

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2445.900	10.488	88.857	99.345	--	--	PEAK
2		2483.500	10.640	38.544	49.185	-24.815	74.000	PEAK
3		2487.500	10.656	40.424	51.080	-22.920	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

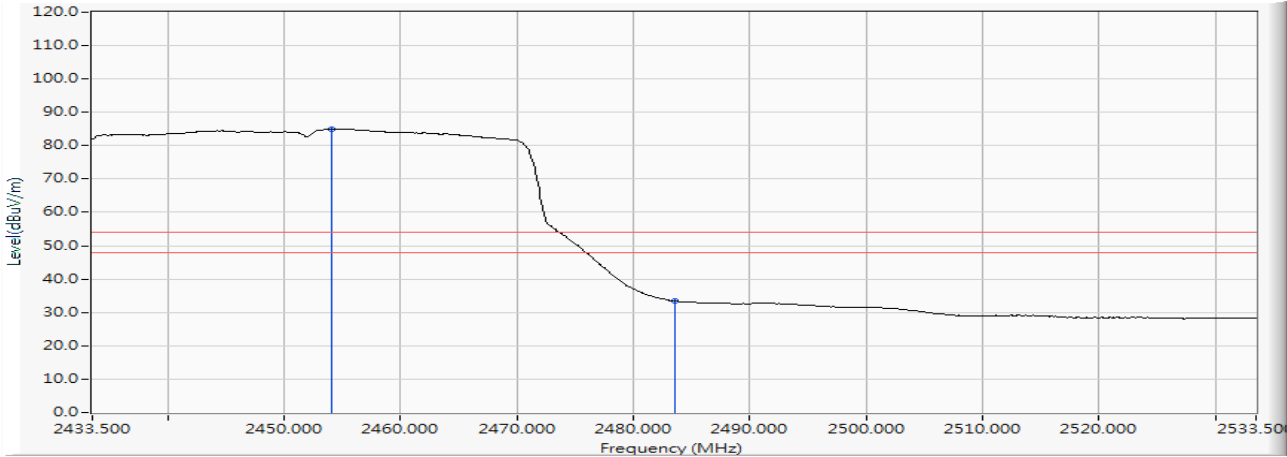


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2454.000	10.516	74.374	84.890	--	--	AVERAGE
2		2483.500	10.640	22.785	33.426	-20.574	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

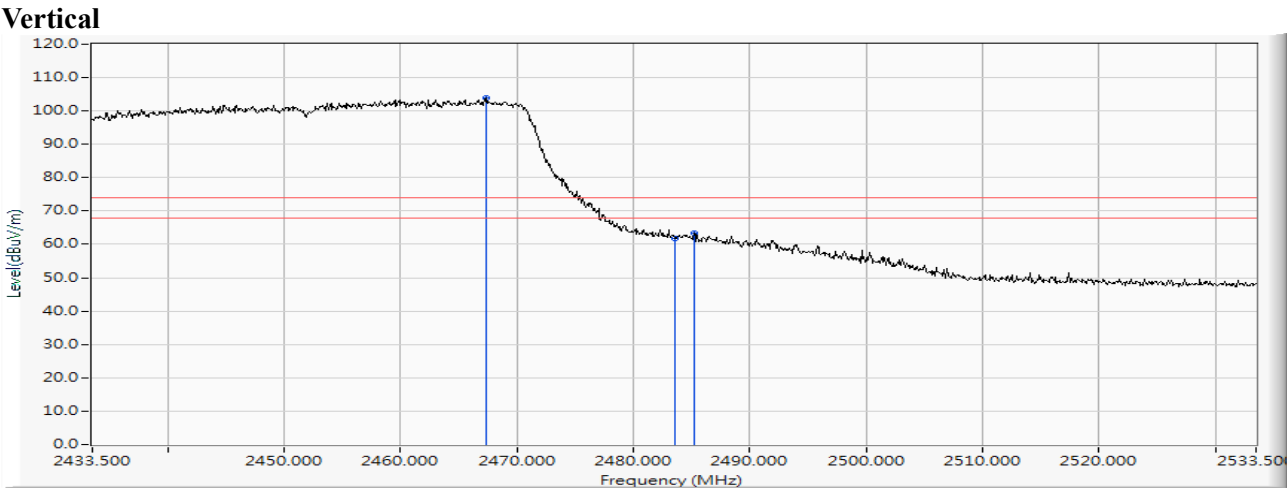

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2467.400	10.574	93.379	103.953	--	--	PEAK
2		2483.500	10.640	50.973	61.614	-12.386	74.000	PEAK
3		2485.200	10.648	52.819	63.467	-10.533	74.000	PEAK

- Note:
1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. “*”, means this data is the worst emission level.
 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

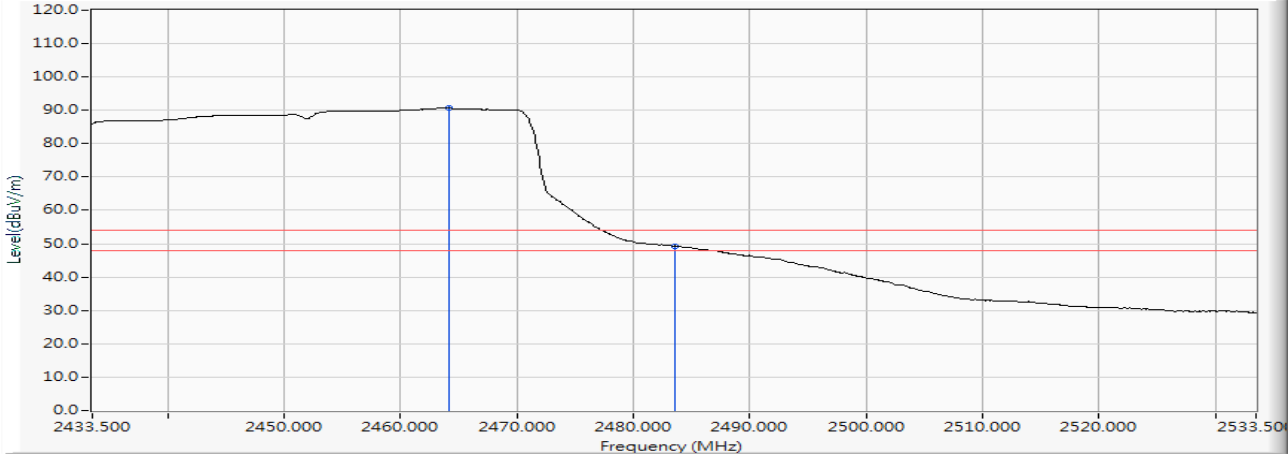

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2464.100	10.559	80.106	90.665	--	--	AVERAGE
2		2483.500	10.640	38.615	49.256	-4.744	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

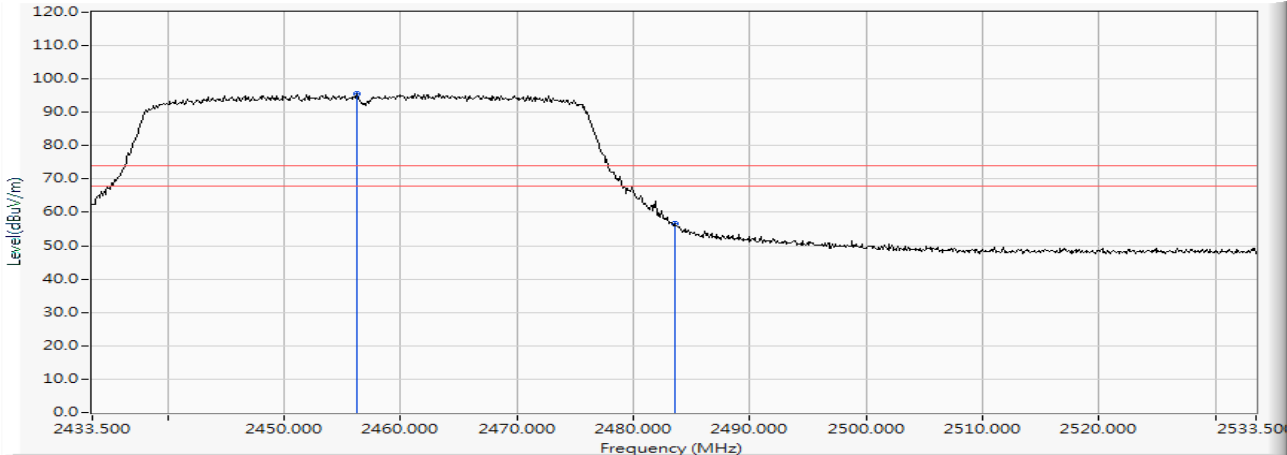

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2456.200	10.525	85.005	95.529	--	--	PEAK
2		2483.500	10.640	45.953	56.594	-17.406	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

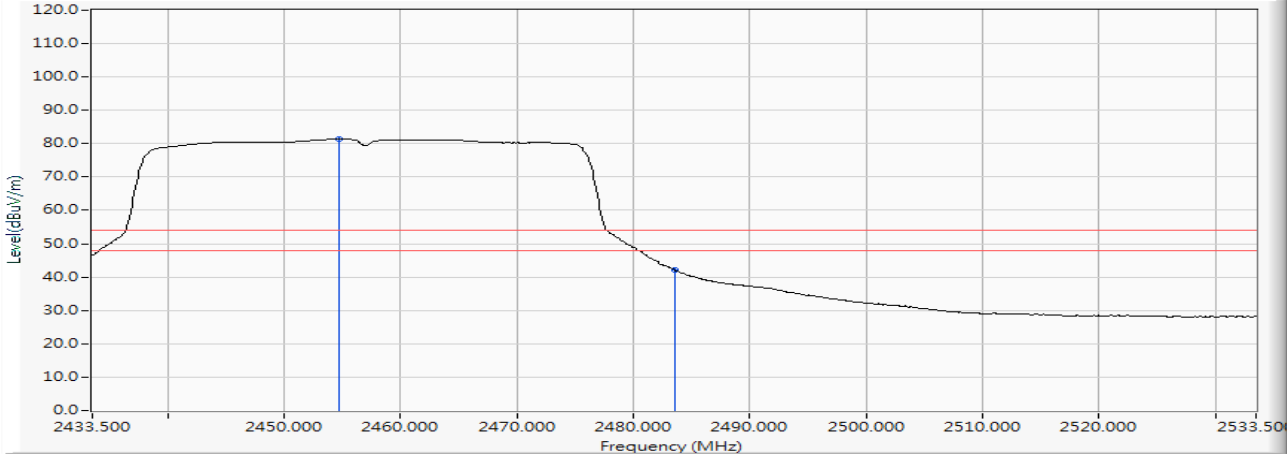


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2454.700	10.518	70.808	81.326	--	--	AVERAGE
2		2483.500	10.640	31.484	42.125	-11.875	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

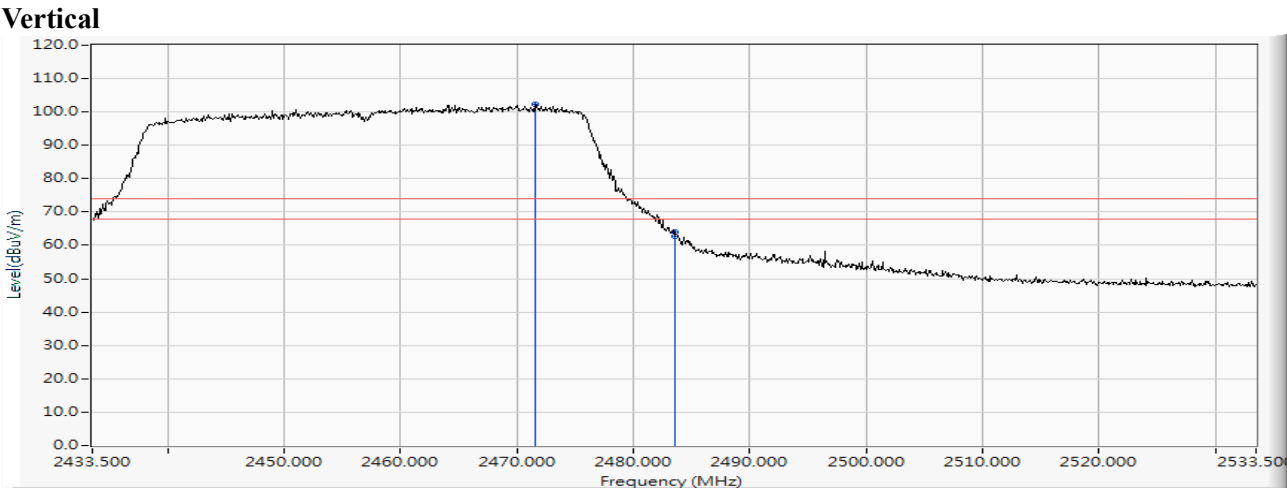

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.500	10.593	91.650	102.243	--	--	PEAK
2		2483.500	10.640	51.939	62.580	-11.420	74.000	PEAK
3		2483.600	10.642	53.271	63.913	-10.087	74.000	PEAK

- Note:
1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. “ * ”, means this data is the worst emission level.
 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 10 (2457MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

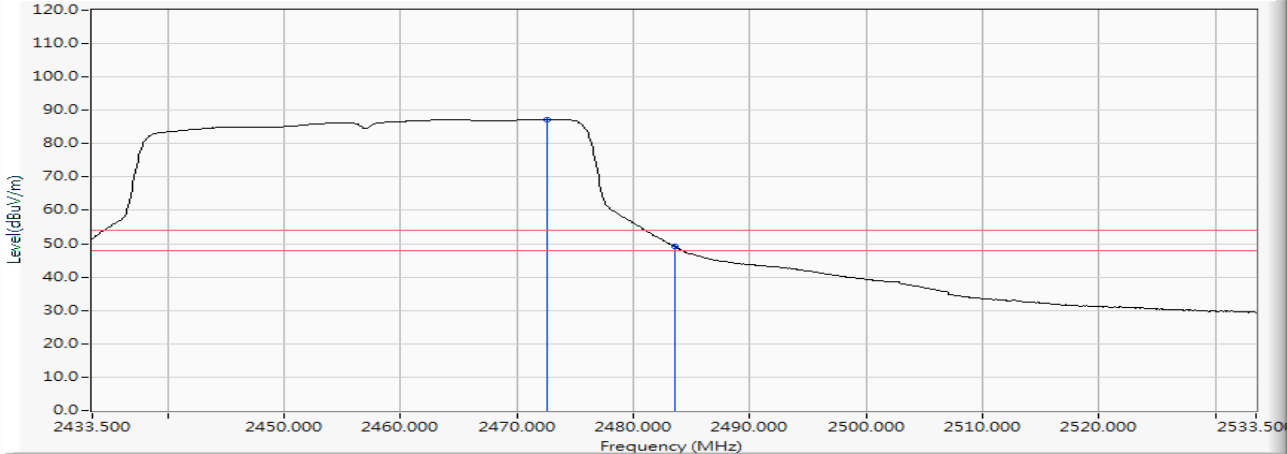

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2472.600	10.597	76.740	87.338	--	--	AVERAGE
2		2483.500	10.640	38.697	49.338	-4.662	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

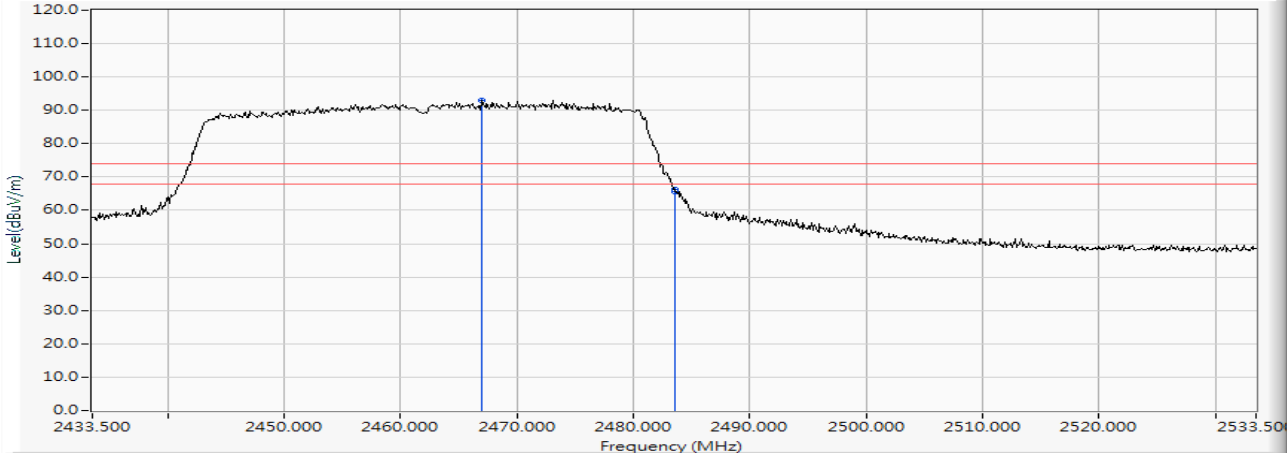

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2466.900	10.572	82.330	92.902	--	--	PEAK
2		2483.500	10.640	54.988	65.629	-8.371	74.000	PEAK
3		2483.600	10.642	55.500	66.142	-7.858	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

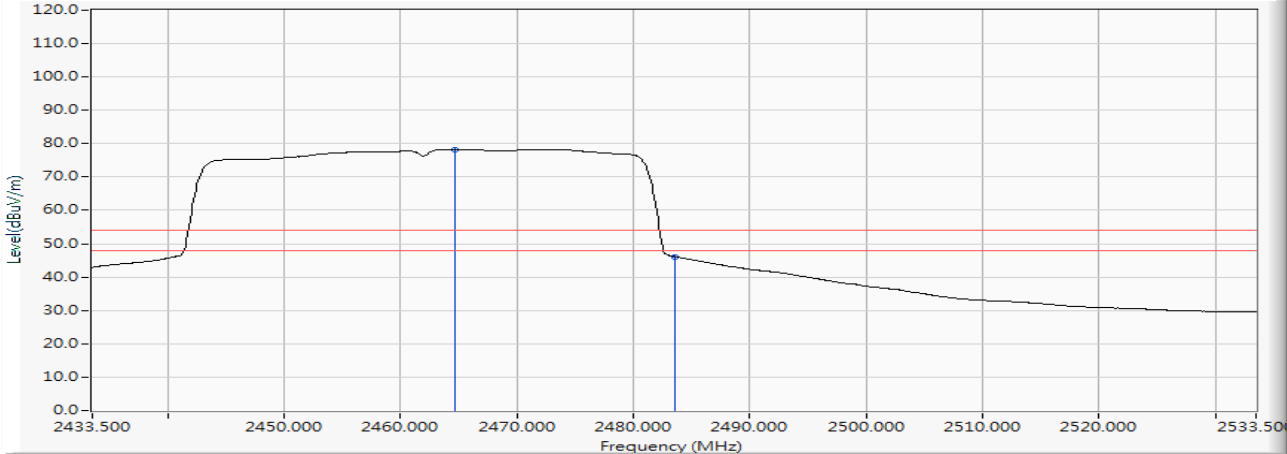

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2464.600	10.561	67.711	78.272	--	--	AVERAGE
2		2483.500	10.640	35.513	46.154	-7.846	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
 待測物型號：AX200NGW
 測試頻道：CH 11 (2462MHz)
 量測天線：3117/00203800
 檢測器：峰值 & 平均值
 測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
 測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)
 測試距離：3 M
 環境溫度：20 °C
 環境濕度：52 %

Vertical

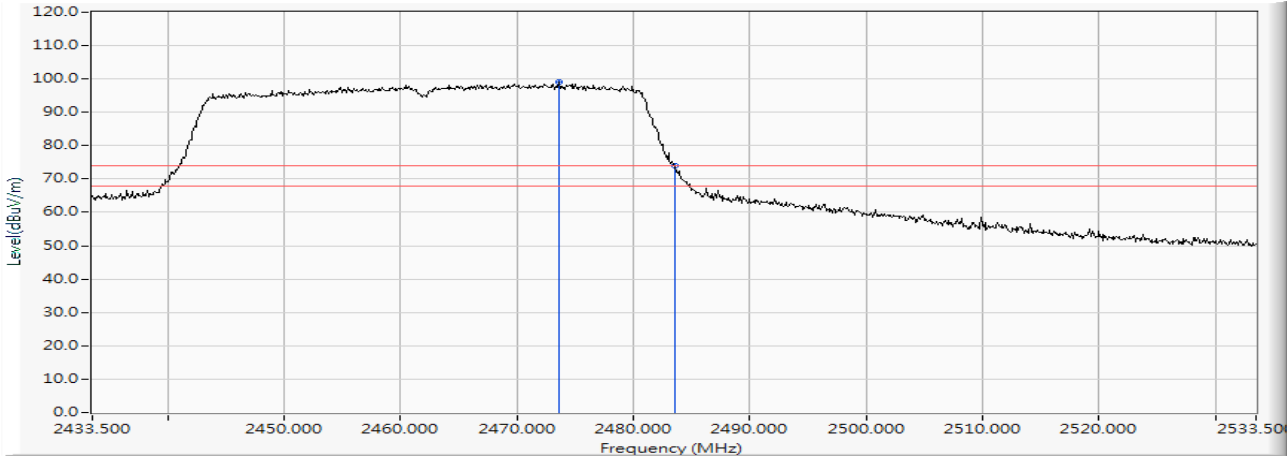

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.600	10.602	88.357	98.959	--	--	PEAK
2		2483.500	10.640	63.287	73.928	-0.072	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 03 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 6: SISO A: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

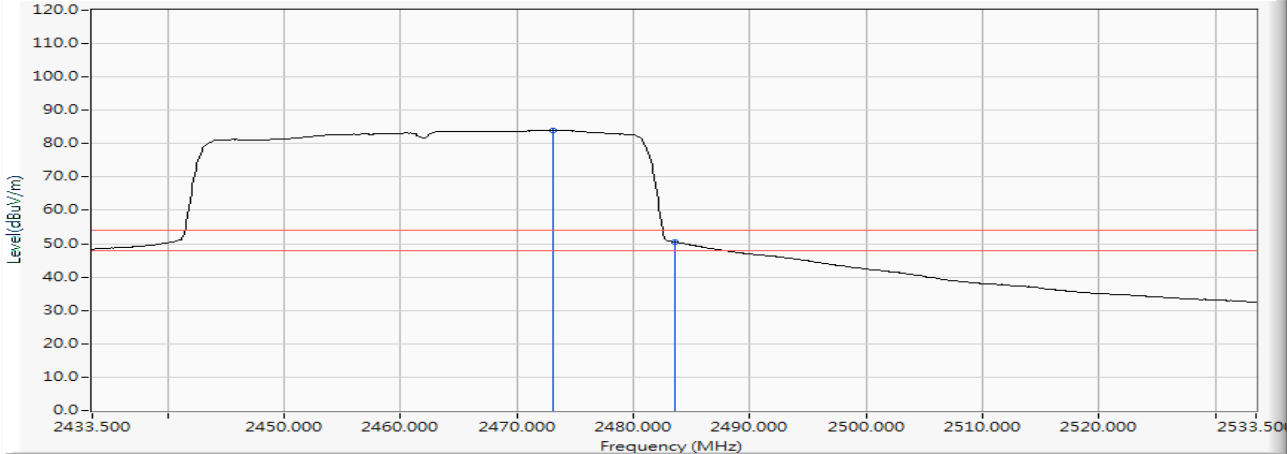

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.100	10.600	73.389	83.989	--	--	AVERAGE
2		2483.500	10.640	39.924	50.565	-3.435	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 01 (2412MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

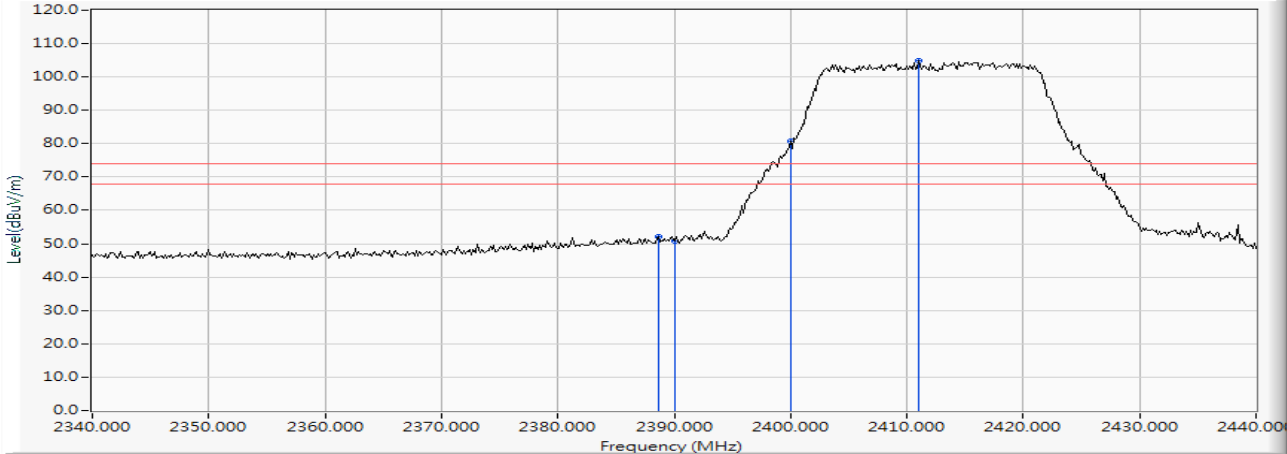

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1		2388.696	10.257	41.993	52.250	-21.750	74.000	PEAK
2		2390.000	10.262	40.590	50.852	-23.148	74.000	PEAK
3		2400.000	10.304	70.554	80.857	--	--	PEAK
4	*	2411.014	10.348	94.496	104.844	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 01 (2412MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

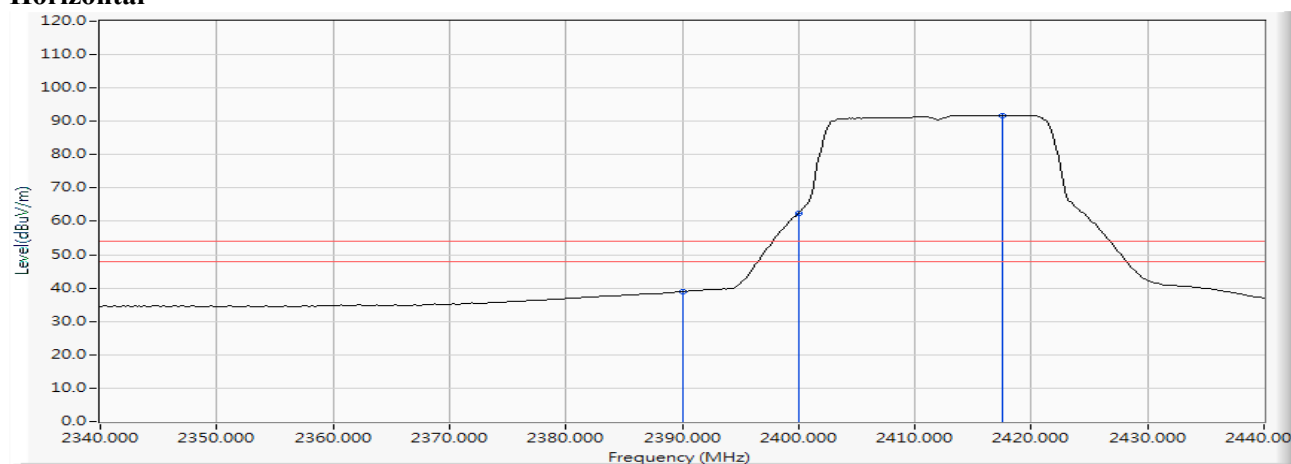Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	28.643	38.905	-15.095	54.000	AVERAGE
2		2400.000	10.304	52.159	62.462	--	--	AVERAGE
3	*	2417.536	10.374	81.382	91.756	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 01 (2412MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

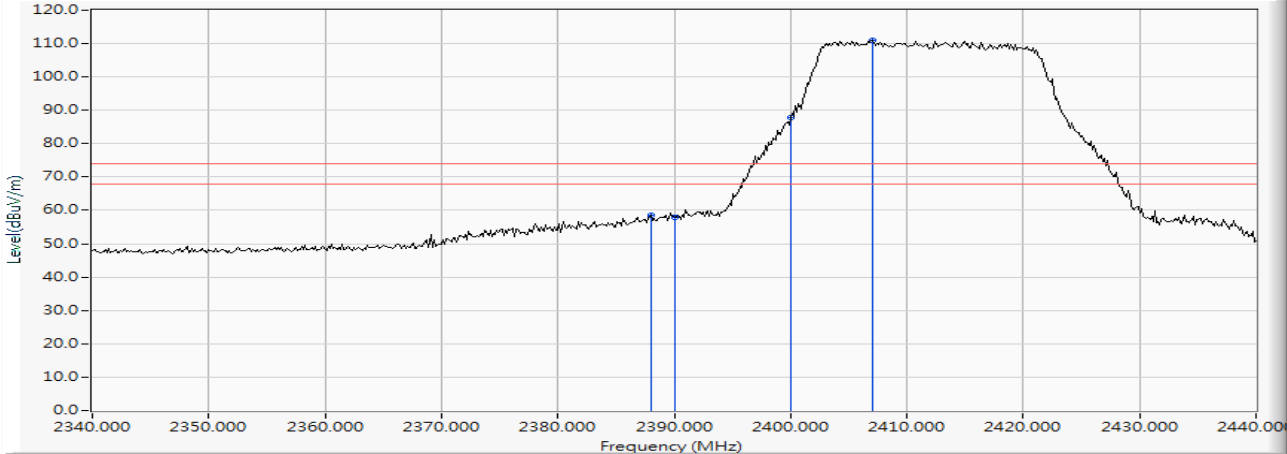

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1		2387.971	10.253	48.292	58.546	-15.454	74.000	PEAK
2		2390.000	10.262	47.670	57.932	-16.068	74.000	PEAK
3		2400.000	10.304	77.580	87.883	--	--	PEAK
4	*	2407.101	10.333	100.771	111.103	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 01 (2412MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

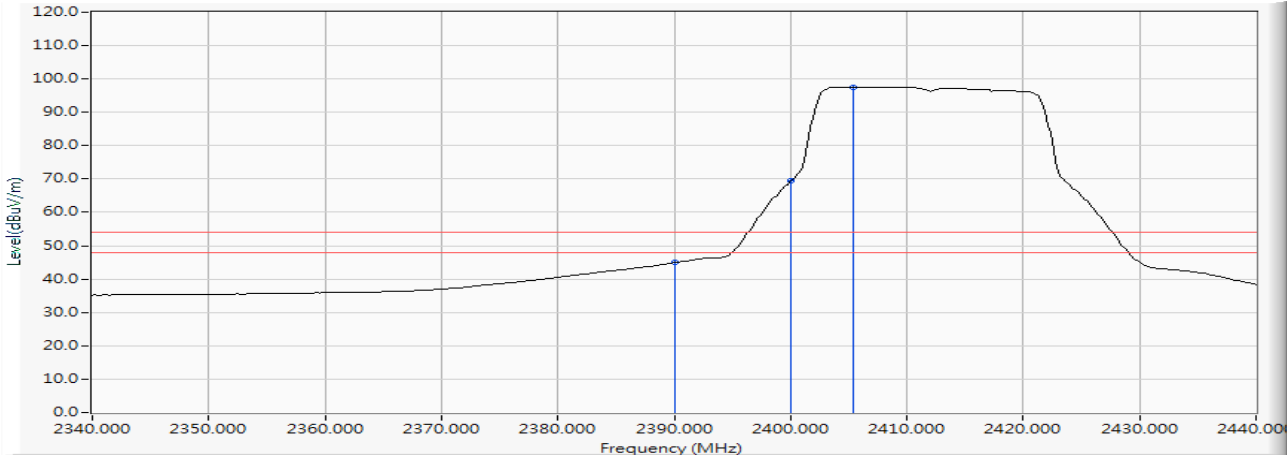

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	34.621	44.883	-9.117	54.000	AVERAGE
2		2400.000	10.304	59.140	69.443	--	--	AVERAGE
3	*	2405.362	10.325	87.220	97.545	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

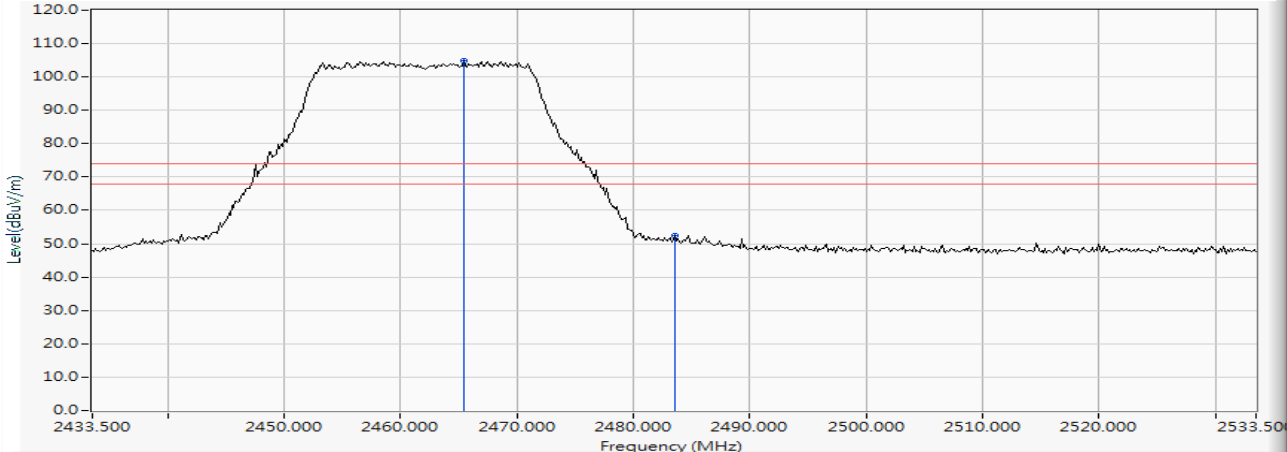

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2465.384	10.565	94.180	104.745	--	--	PEAK
2		2483.500	10.640	41.645	52.286	-21.714	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

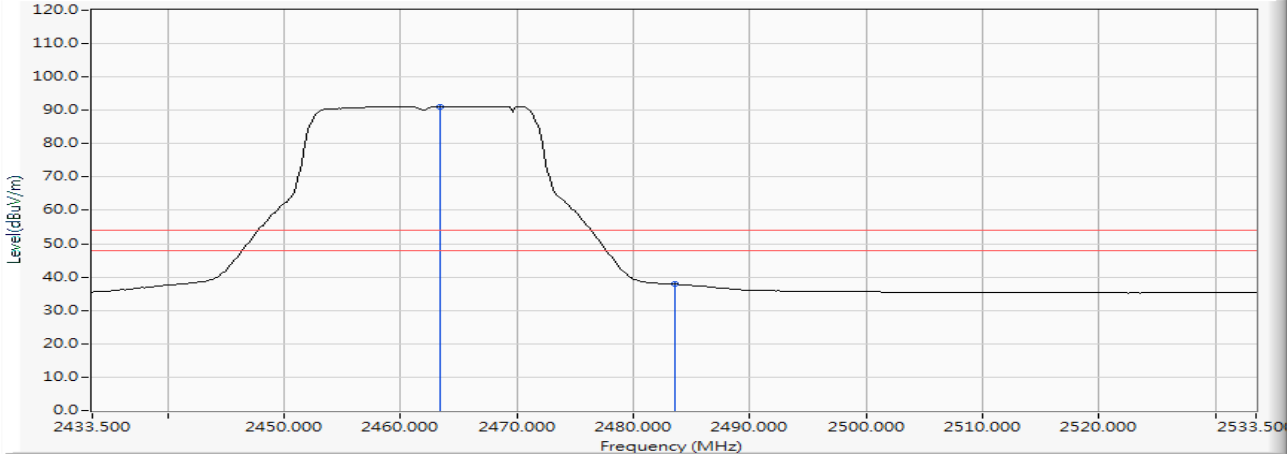

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2463.355	10.555	80.622	91.178	--	--	AVERAGE
2		2483.500	10.640	27.232	37.873	-16.127	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

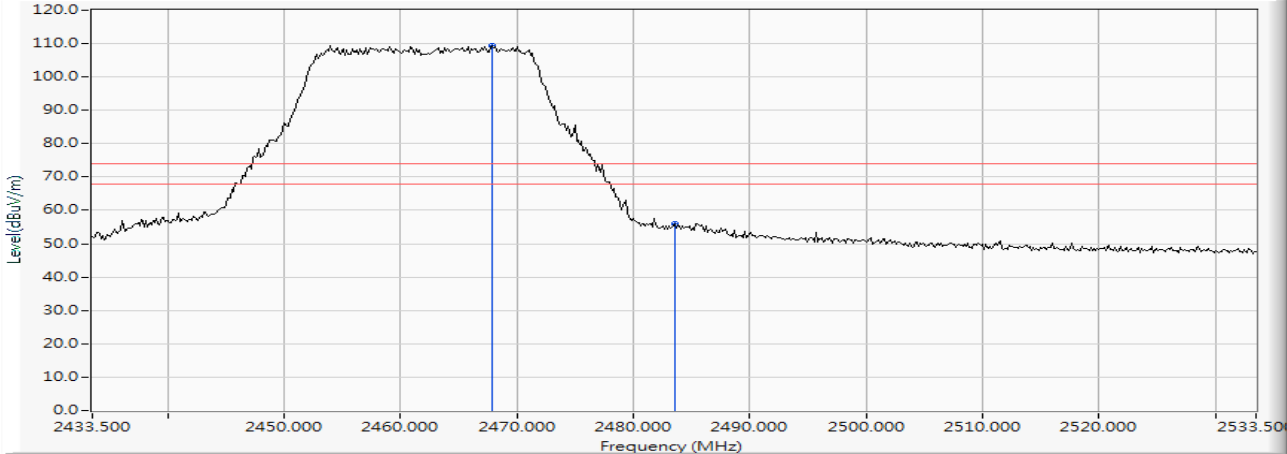

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2467.848	10.576	98.944	109.520	--	--	PEAK
2		2483.500	10.640	45.354	55.995	-18.005	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

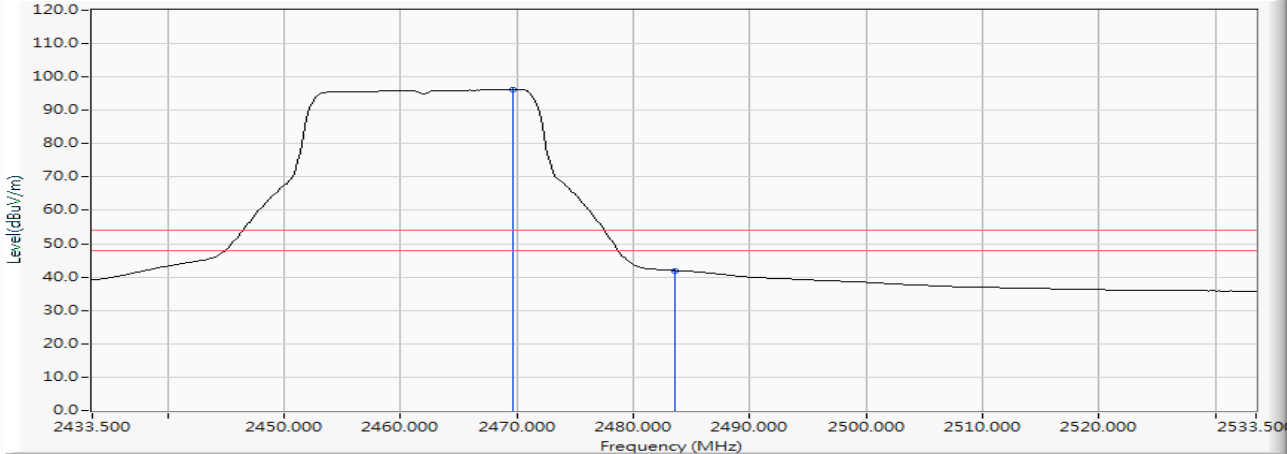

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2469.587	10.584	85.653	96.237	--	--	AVERAGE
2		2483.500	10.640	31.319	41.960	-12.040	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

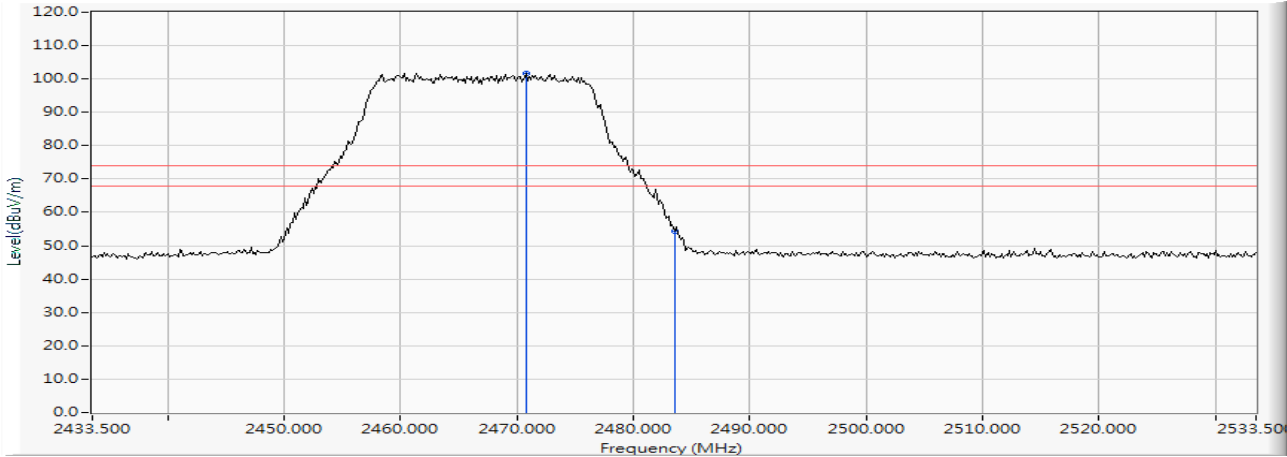

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.746	10.589	91.184	101.773	--	--	PEAK
2		2483.500	10.640	43.740	54.381	-19.619	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

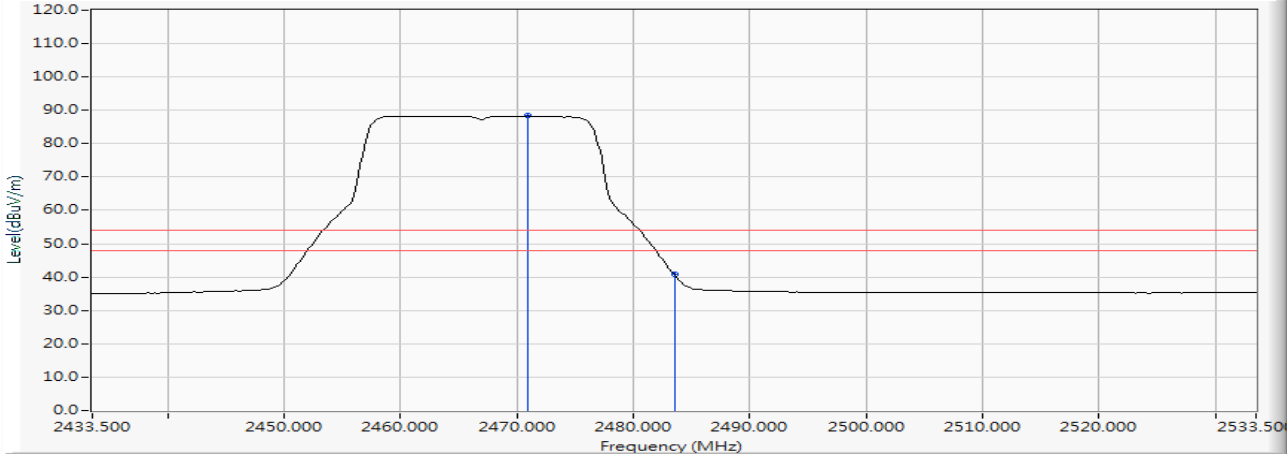

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.891	10.590	77.735	88.325	--	--	AVERAGE
2		2483.500	10.640	30.069	40.710	-13.290	54.000	AVERAGE


Note:

- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. “*”, means this data is the worst emission level.
- 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

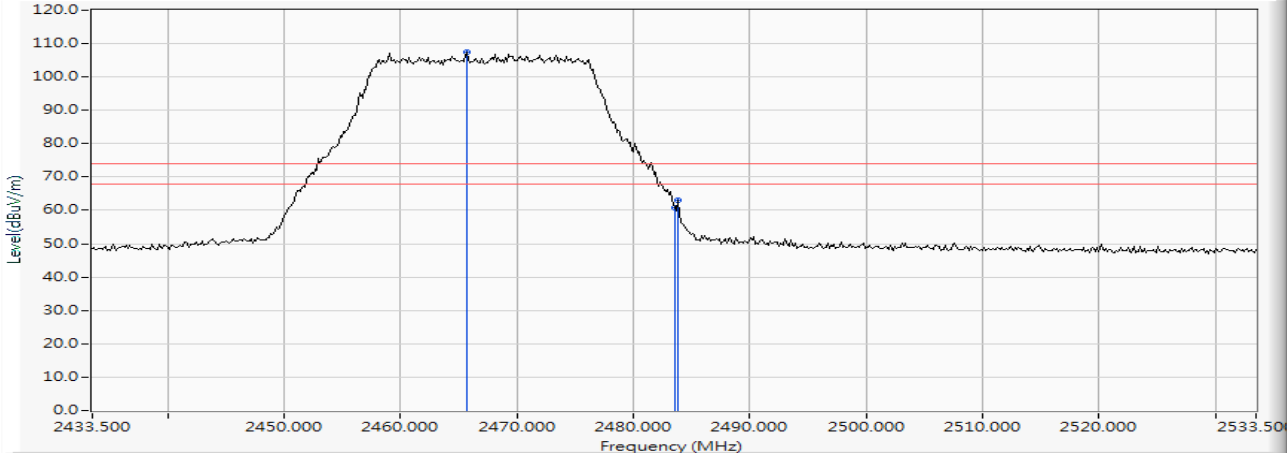

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2465.674	10.566	96.901	107.467	--	--	PEAK
2		2483.500	10.640	50.239	60.880	-13.120	74.000	PEAK
3		2483.790	10.643	52.309	62.951	-11.049	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

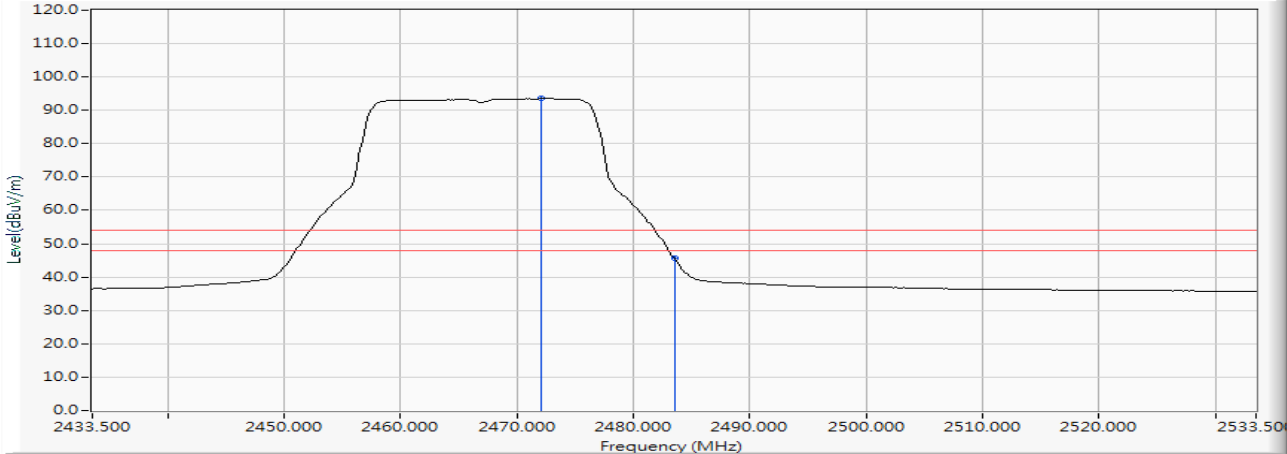

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2472.051	10.596	82.907	93.502	--	--	AVERAGE
2		2483.500	10.640	35.068	45.709	-8.291	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

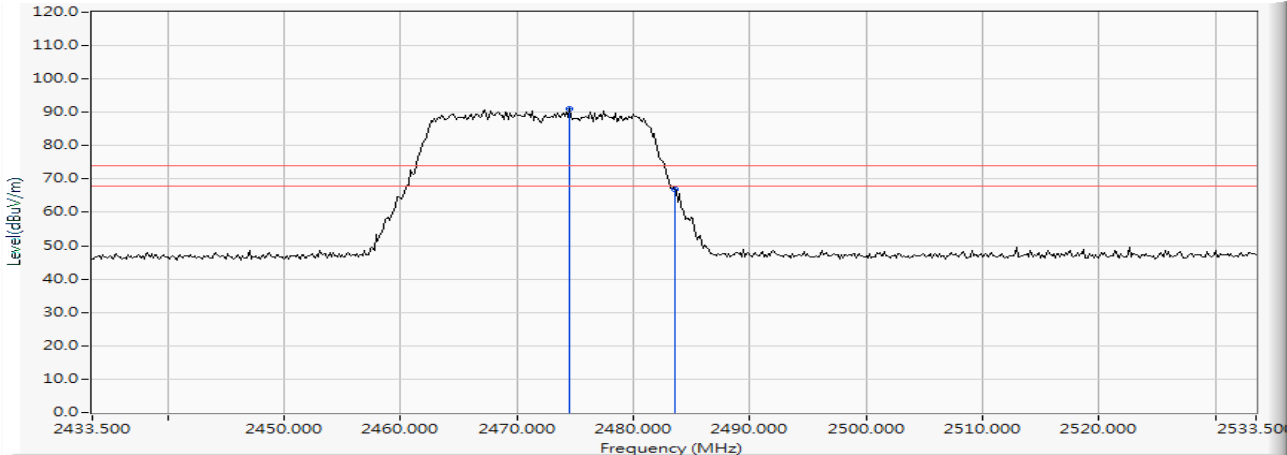

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2474.514	10.606	80.502	91.108	--	--	PEAK
2		2483.500	10.640	56.239	66.880	-7.120	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

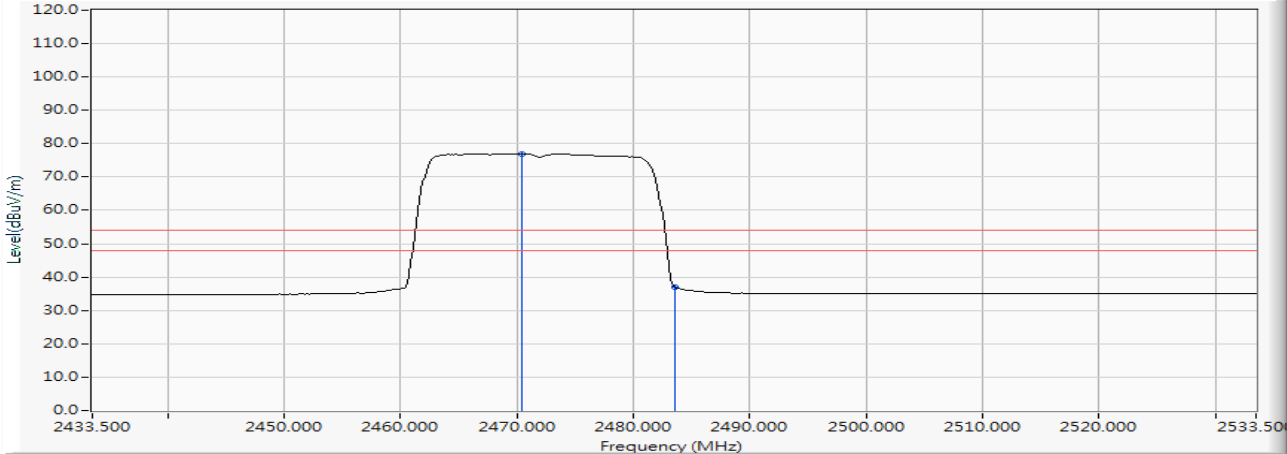

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.457	10.587	66.329	76.917	--	--	AVERAGE
2		2483.500	10.640	26.391	37.032	-16.968	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 13 (2472MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108年04月04日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

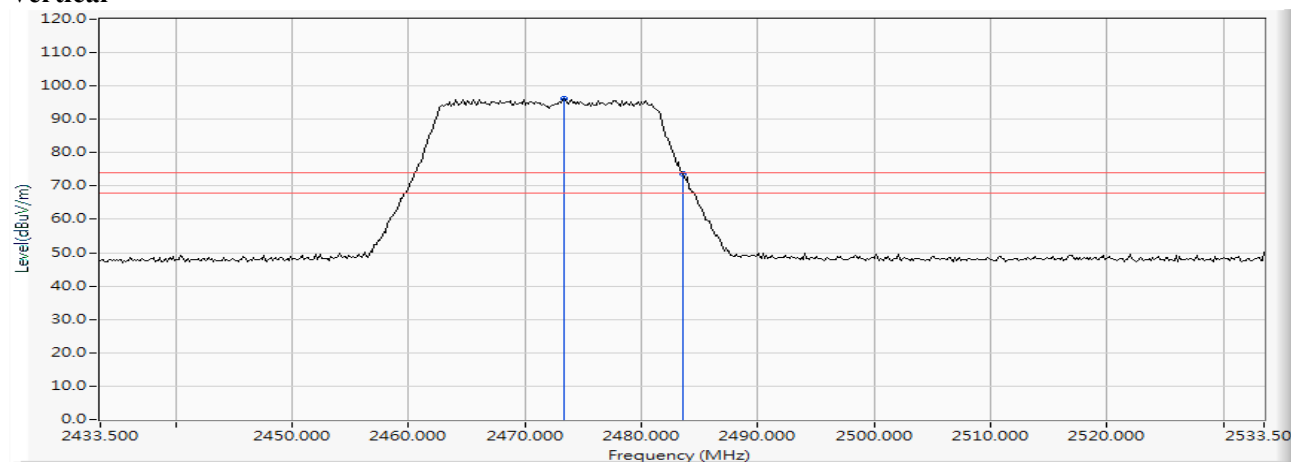Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.355	10.601	85.507	96.108	--	--	PEAK
2		2483.500	10.640	63.124	73.765	-0.235	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 13 (2472MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 11: SISO B: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

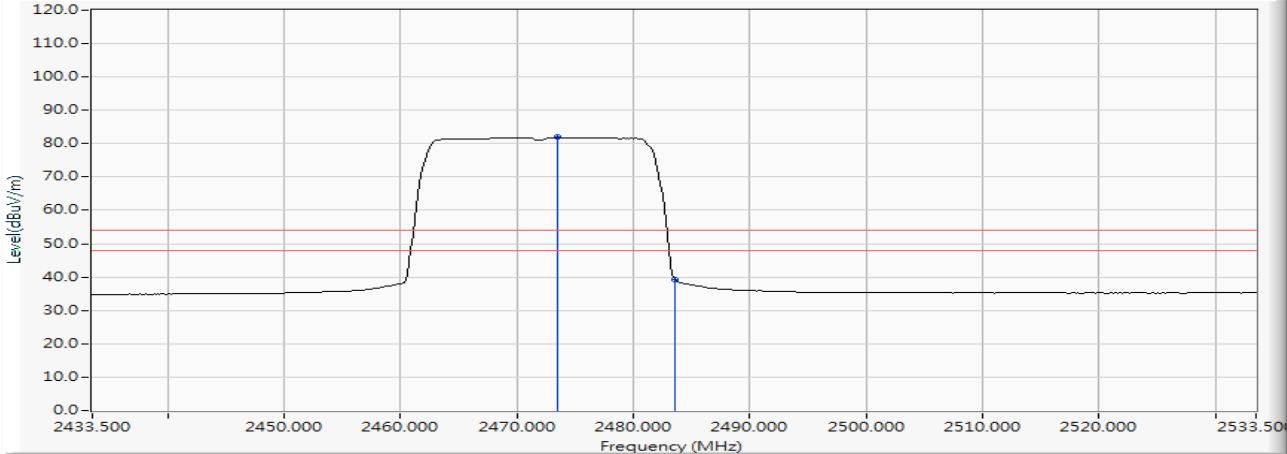

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2473.500	10.601	71.279	81.881	--	--	AVERAGE
2		2483.500	10.640	28.738	39.379	-14.621	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

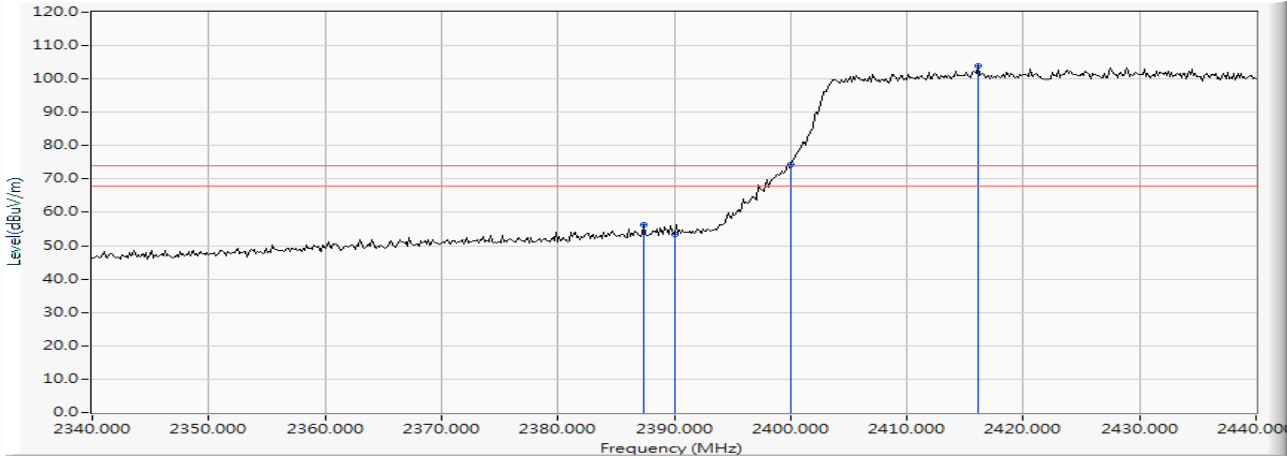

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2387.391	10.251	46.001	56.252	-17.748	74.000	PEAK
2		2390.000	10.262	43.175	53.437	-20.563	74.000	PEAK
3		2400.000	10.304	64.077	74.380	--	--	PEAK
4	*	2416.087	10.367	93.551	103.919	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 03 (2422 MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

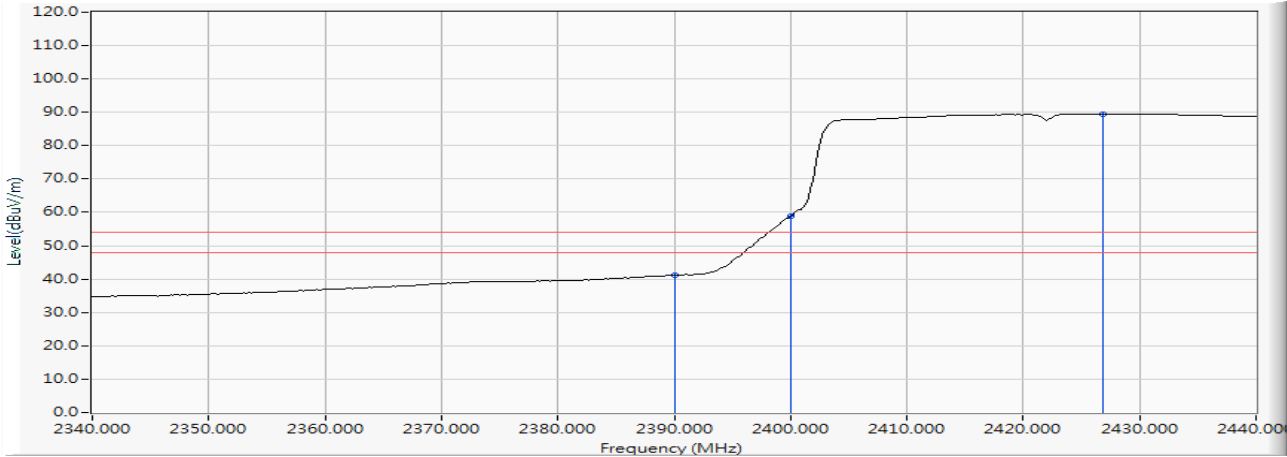

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	30.903	41.165	-12.835	54.000	AVERAGE
2		2400.000	10.304	48.626	58.929	--	--	AVERAGE
3	*	2426.812	10.413	79.104	89.517	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 03 (2422 MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

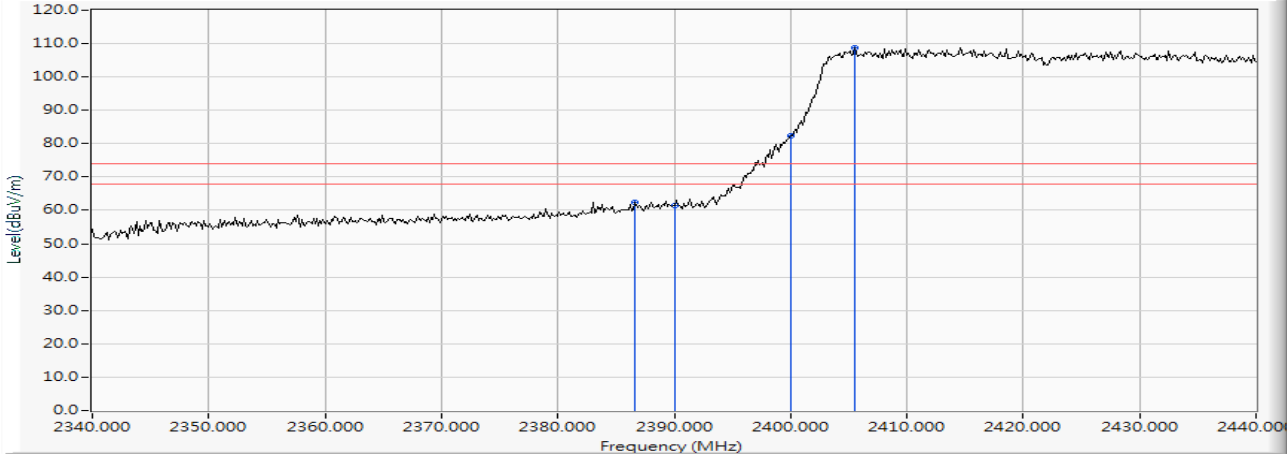

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1		2386.667	10.248	52.116	62.364	-11.636	74.000	PEAK
2		2390.000	10.262	51.345	61.607	-12.393	74.000	PEAK
3		2400.000	10.304	72.022	82.325	--	--	PEAK
4	*	2405.507	10.326	98.280	108.606	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

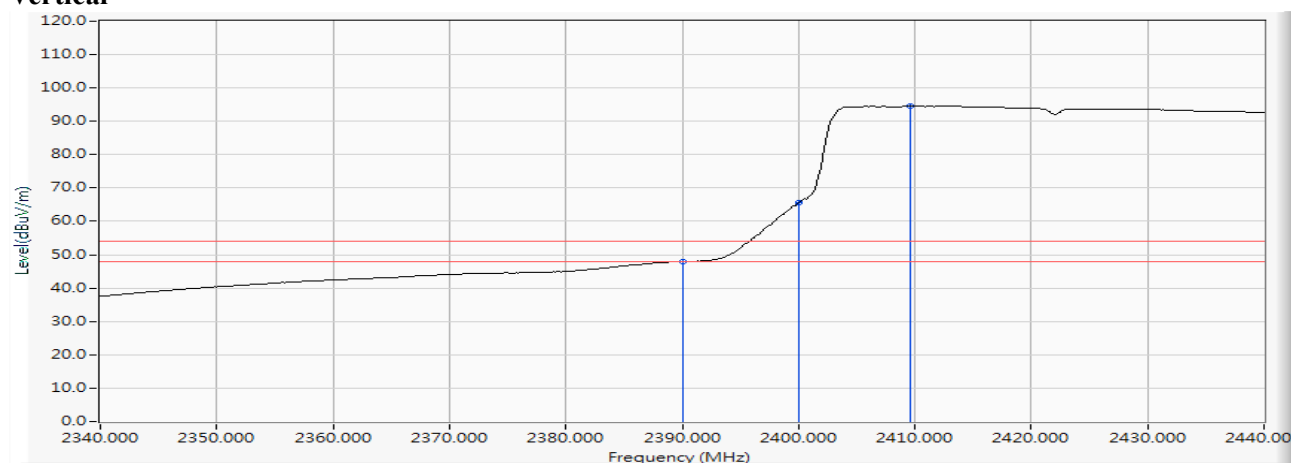Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	37.703	47.965	-6.035	54.000	AVERAGE
2		2400.000	10.304	55.229	65.532	--	--	AVERAGE
3	*	2409.565	10.341	84.174	94.516	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

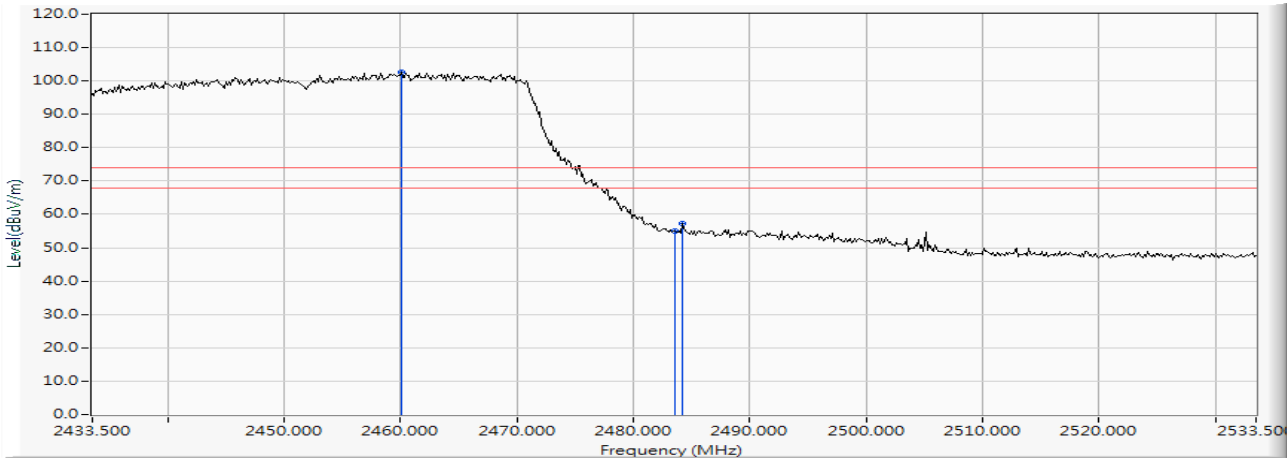

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2460.022	10.541	91.936	102.477	--	--	PEAK
2		2483.500	10.640	44.239	54.880	-19.120	74.000	PEAK
3		2484.225	10.645	46.644	57.288	-16.712	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

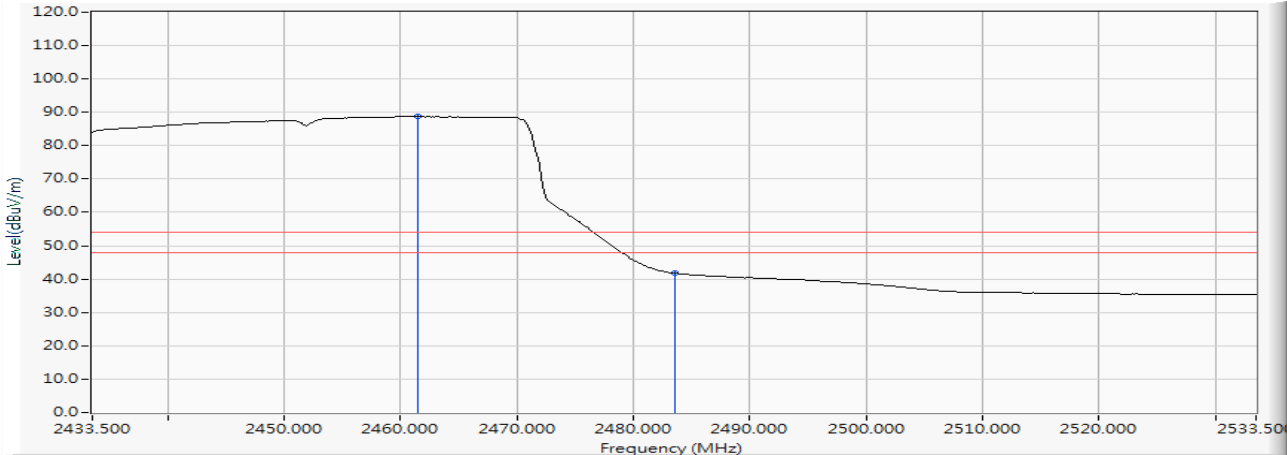


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2461.471	10.547	78.190	88.737	--	--	AVERAGE
2		2483.500	10.640	31.152	41.793	-12.207	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

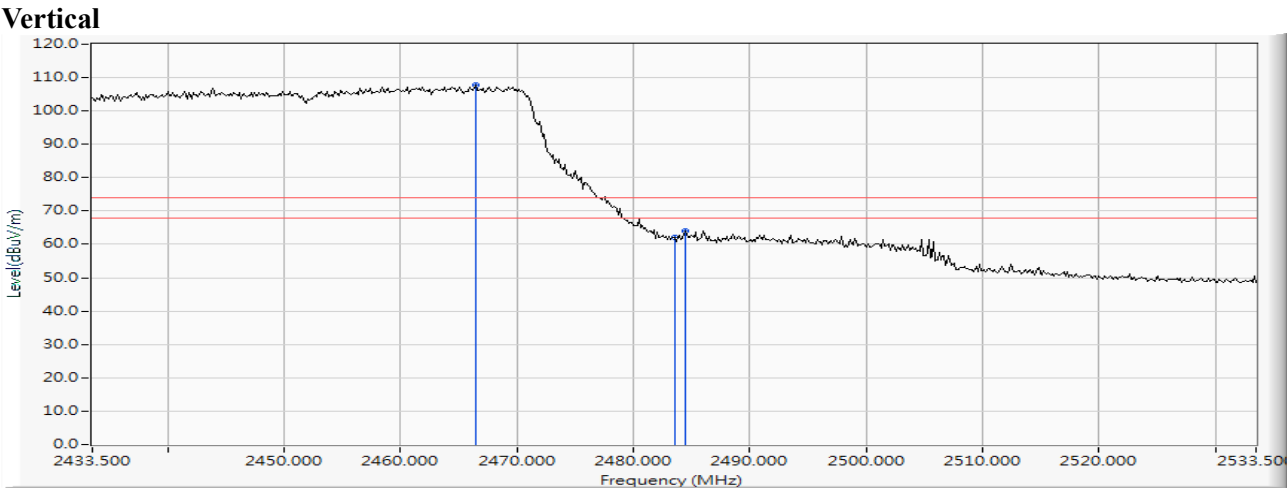

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2466.399	10.569	97.055	107.624	--	--	PEAK
2		2483.500	10.640	51.558	62.199	-11.801	74.000	PEAK
3		2484.514	10.646	53.269	63.914	-10.086	74.000	PEAK

- Note:
1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. “*”, means this data is the worst emission level.
 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

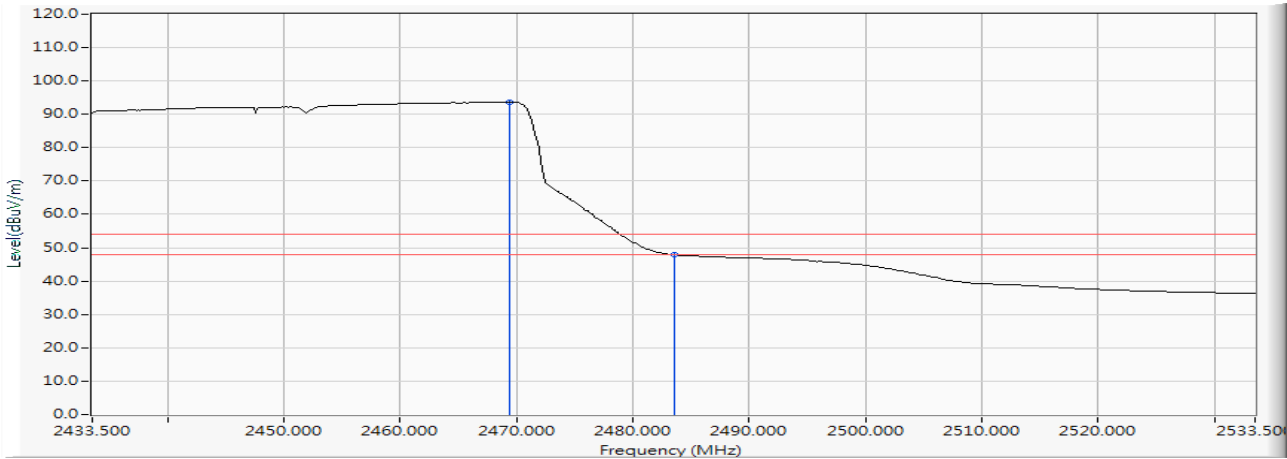

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2469.442	10.583	83.193	93.776	--	--	AVERAGE
2		2483.500	10.640	37.282	47.923	-6.077	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

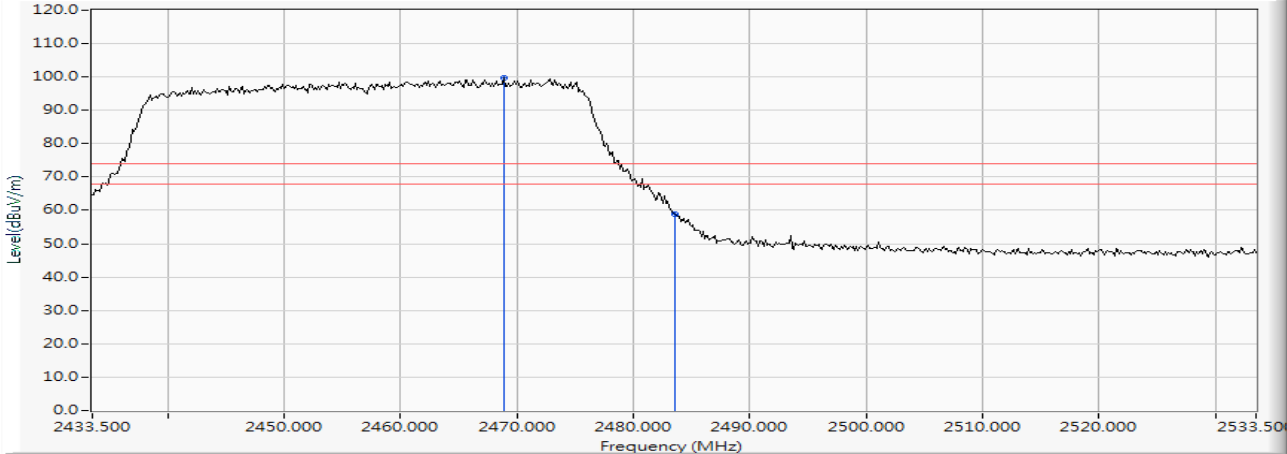

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2468.862	10.580	89.203	99.783	--	--	PEAK
2		2483.500	10.640	48.255	58.896	-15.104	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 10 (2457MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

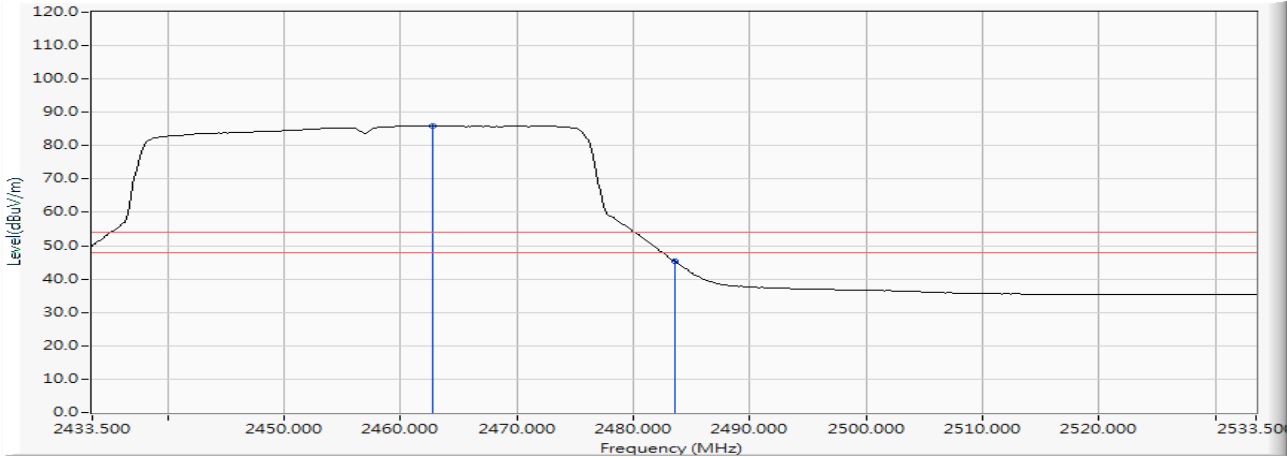


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2462.775	10.554	75.376	85.929	--	--	AVERAGE
2		2483.500	10.640	34.758	45.399	-8.601	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

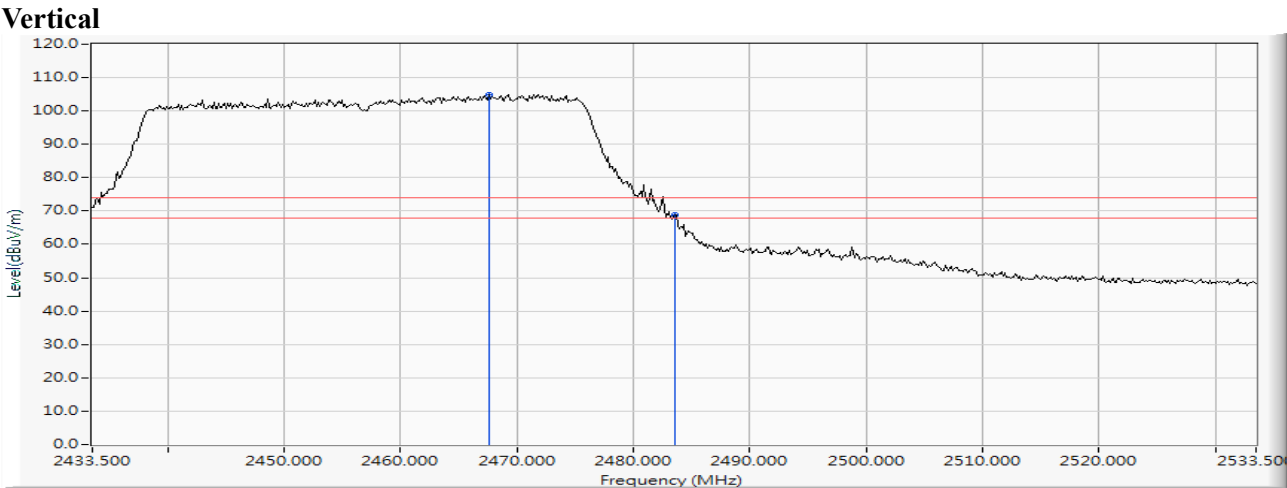

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2467.558	10.575	94.416	104.991	--	--	PEAK
2		2483.500	10.640	58.265	68.906	-5.094	74.000	PEAK

- Note:
1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. “*”, means this data is the worst emission level.
 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 10 (2457MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

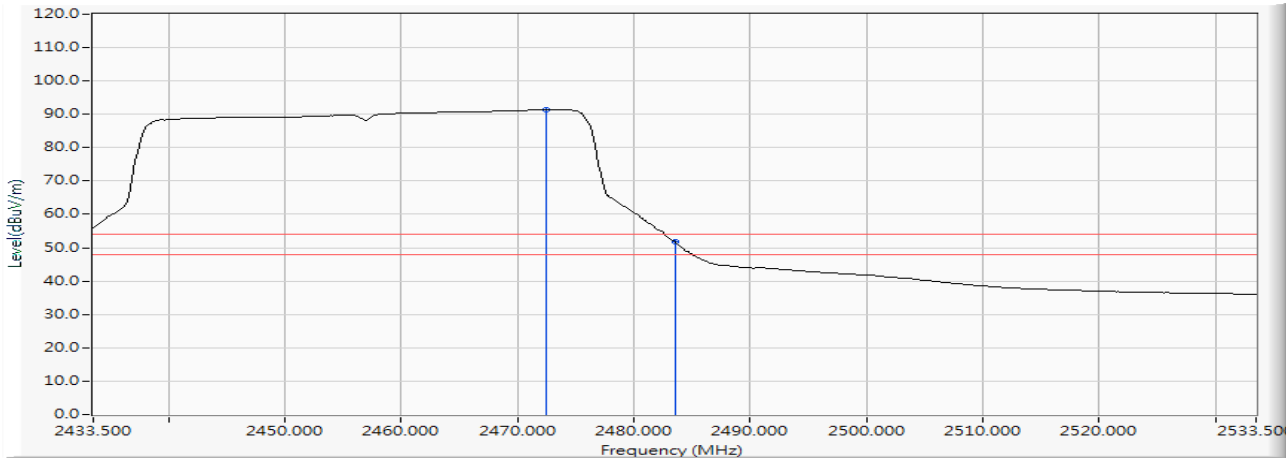

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2472.486	10.597	80.739	91.336	--	--	AVERAGE
2		2483.500	10.640	41.073	51.714	-2.286	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

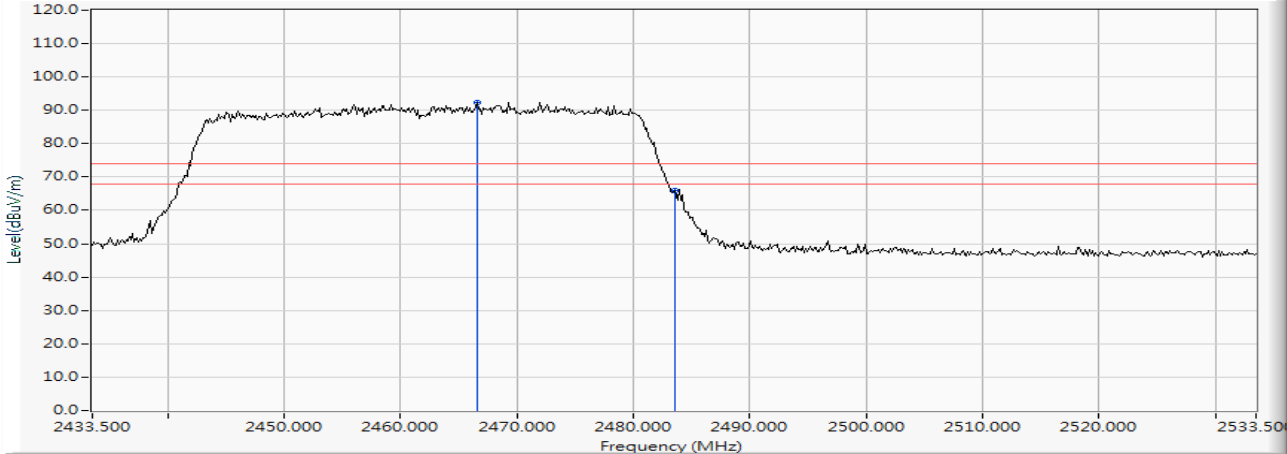

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2466.543	10.570	81.922	92.492	--	--	PEAK
2		2483.500	10.640	55.274	65.915	-8.085	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

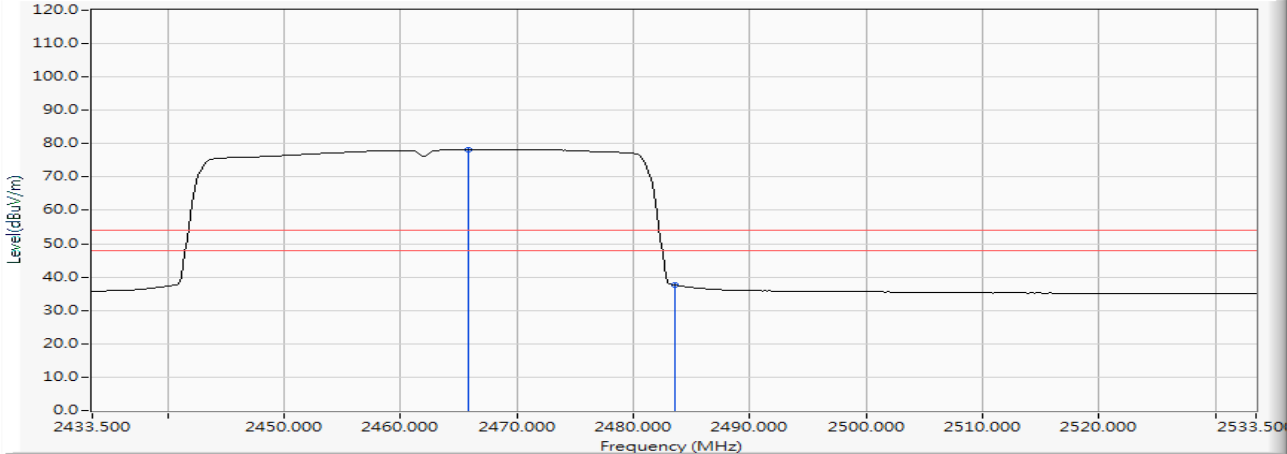


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2465.819	10.566	67.625	78.192	--	--	AVERAGE
2		2483.500	10.640	26.956	37.597	-16.403	54.000	AVERAGE

Note:

- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. “*”, means this data is the worst emission level.
- 3. Measurement Level = Reading Level + Correct Factor

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

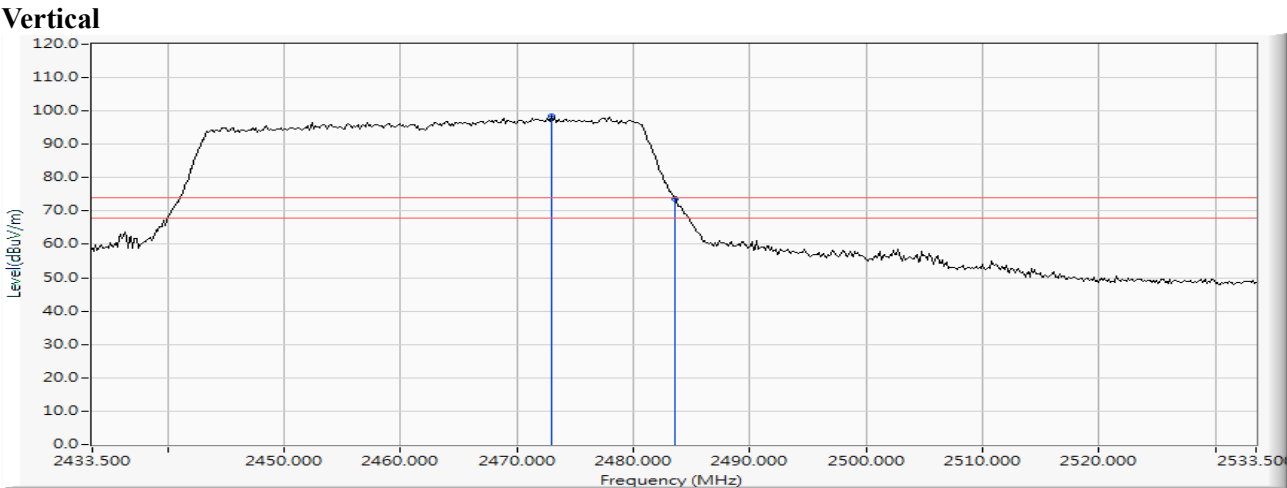


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2472.920	10.599	87.711	98.310	--	--	PEAK
2		2483.500	10.640	63.107	73.748	-0.252	74.000	PEAK

- Note:
1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. “*”, means this data is the worst emission level.
 3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 12: SISO B: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

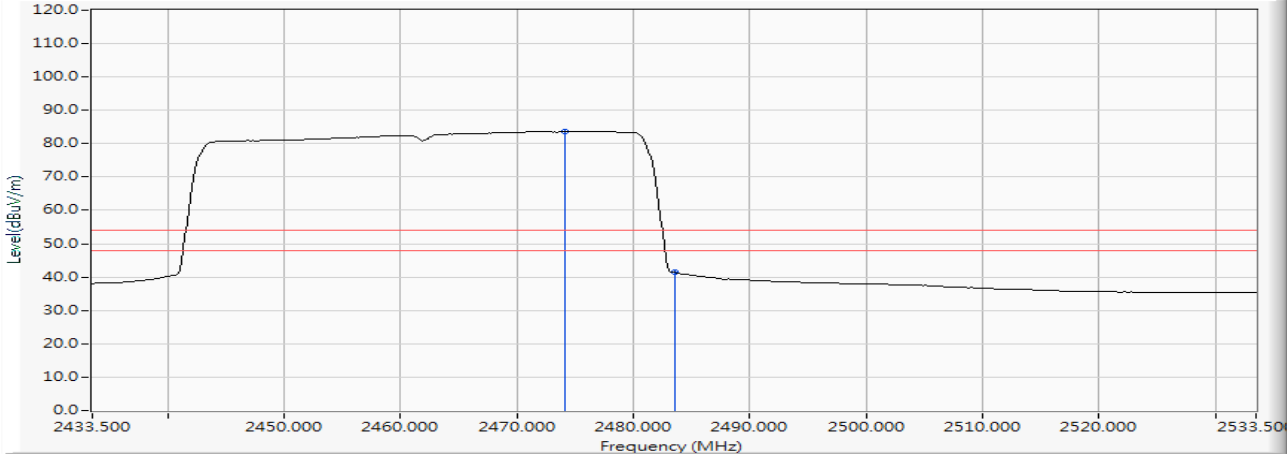

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2474.080	10.604	73.039	83.643	--	--	AVERAGE
2		2483.500	10.640	30.789	41.430	-12.570	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 01 (2412MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

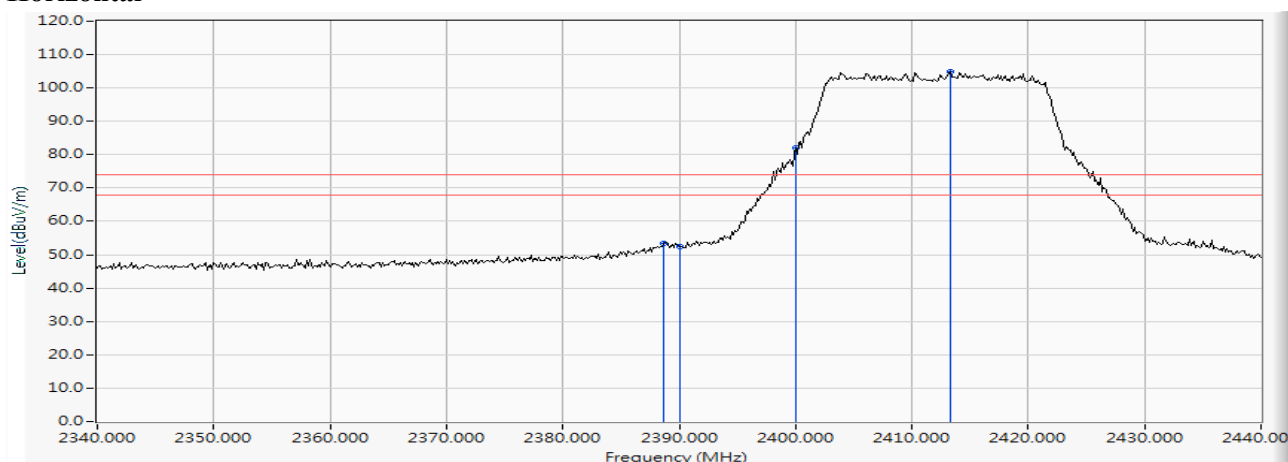Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2388.696	10.257	43.280	53.537	-20.463	74.000	PEAK
2		2390.000	10.262	42.050	52.312	-21.688	74.000	PEAK
3		2400.000	10.304	71.851	82.154	--	--	PEAK
4	*	2413.333	10.358	94.557	104.914	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 01 (2412MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

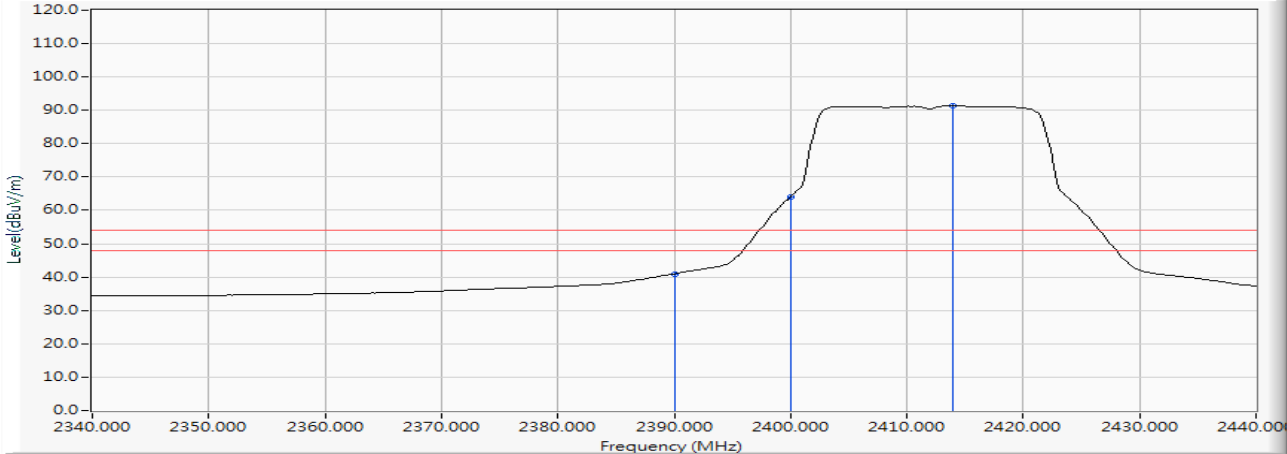

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	30.739	41.001	-12.999	54.000	AVERAGE
2		2400.000	10.304	53.762	64.065	--	--	AVERAGE
3	*	2413.913	10.359	81.037	91.397	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
 待測物型號：AX200NGW
 測試頻道：CH 01 (2412MHz)
 量測天線：3117/00203800
 檢測器：峰值 & 平均值
 測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
 測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
 測試距離：3 M
 環境溫度：20 °C
 環境濕度：52 %

Vertical

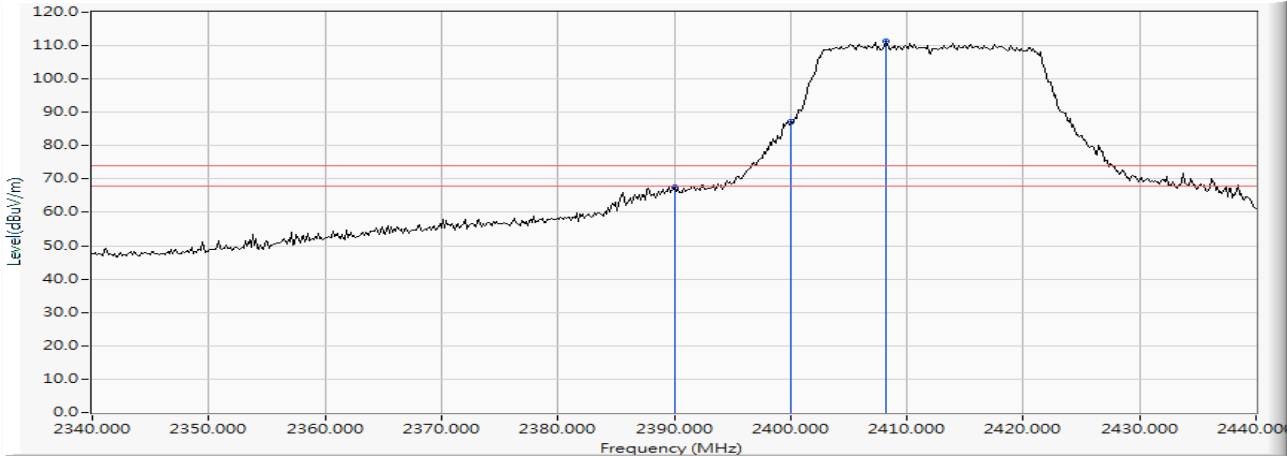

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	57.232	67.494	-6.506	74.000	PEAK
2		2400.000	10.304	77.033	87.336	--	--	PEAK
3	*	2408.261	10.337	100.916	111.253	--	--	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 01 (2412MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

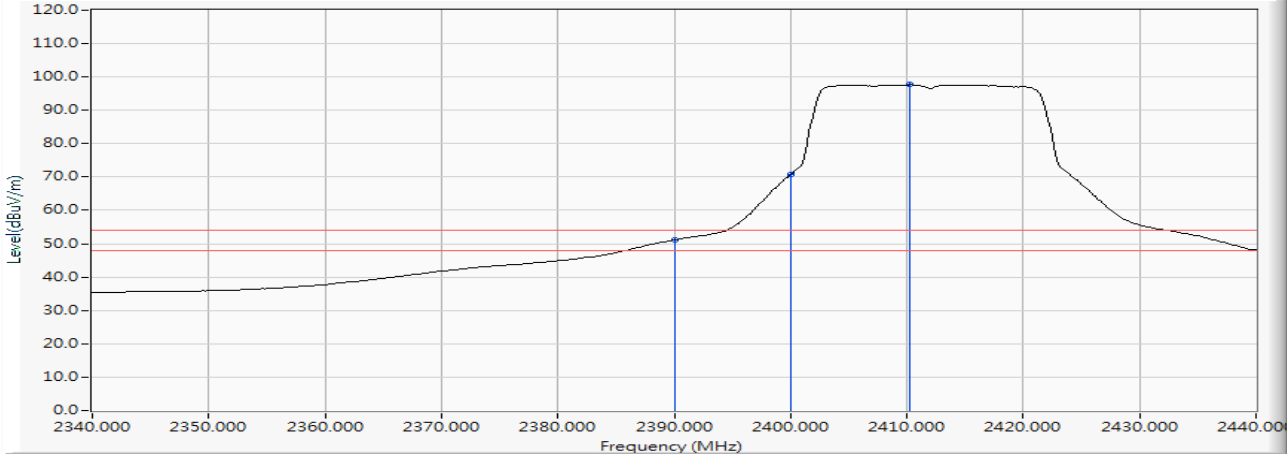

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	40.884	51.146	-2.854	54.000	AVERAGE
2		2400.000	10.304	60.401	70.704	--	--	AVERAGE
3	*	2410.290	10.345	87.308	97.653	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 11 (2462MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

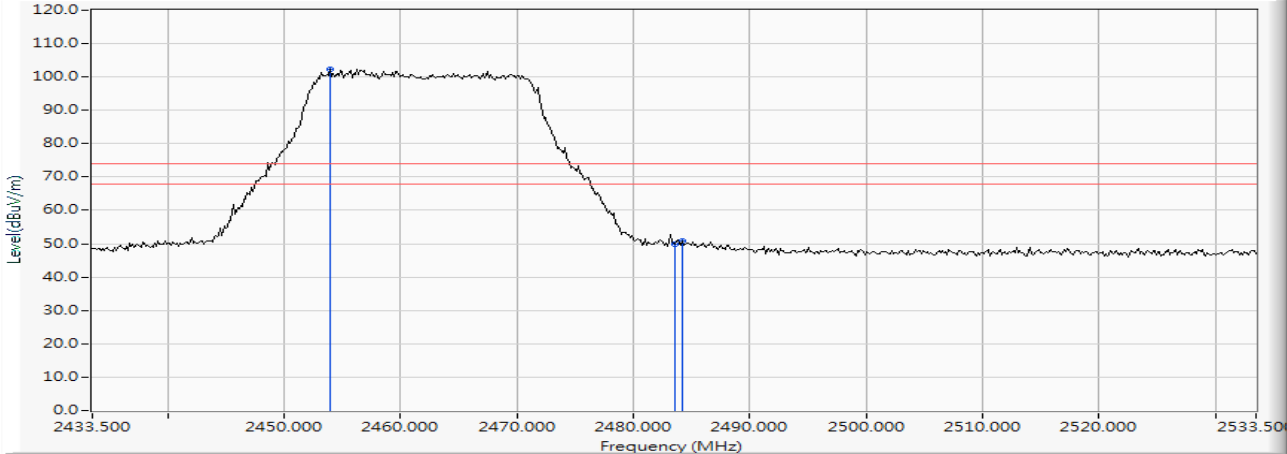

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2453.935	10.515	91.854	102.370	--	--	PEAK
2		2483.500	10.640	39.351	49.992	-24.008	74.000	PEAK
3		2484.225	10.645	40.177	50.821	-23.179	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

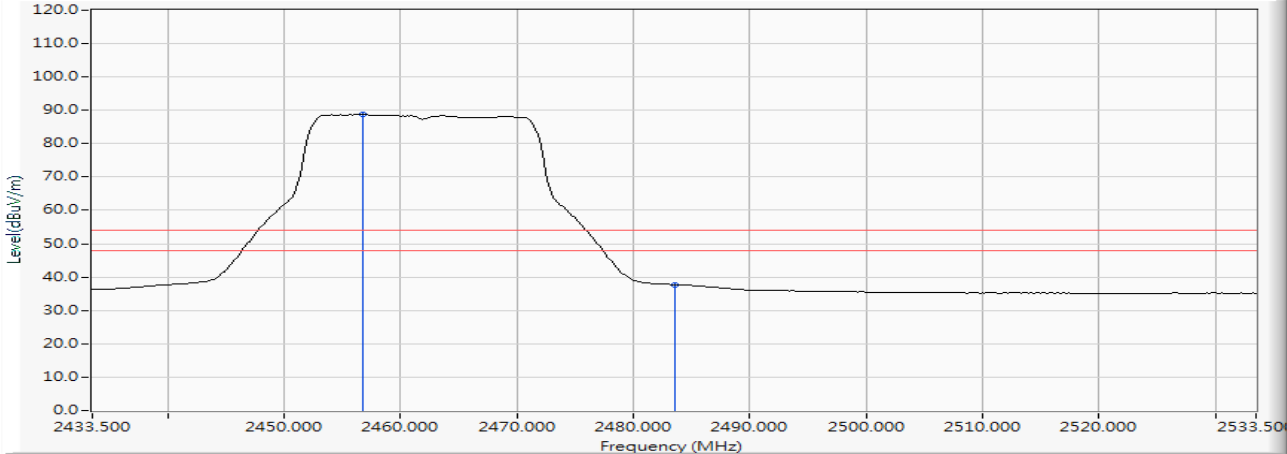

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2456.688	10.526	78.145	88.671	--	--	AVERAGE
2		2483.500	10.640	27.115	37.756	-16.244	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

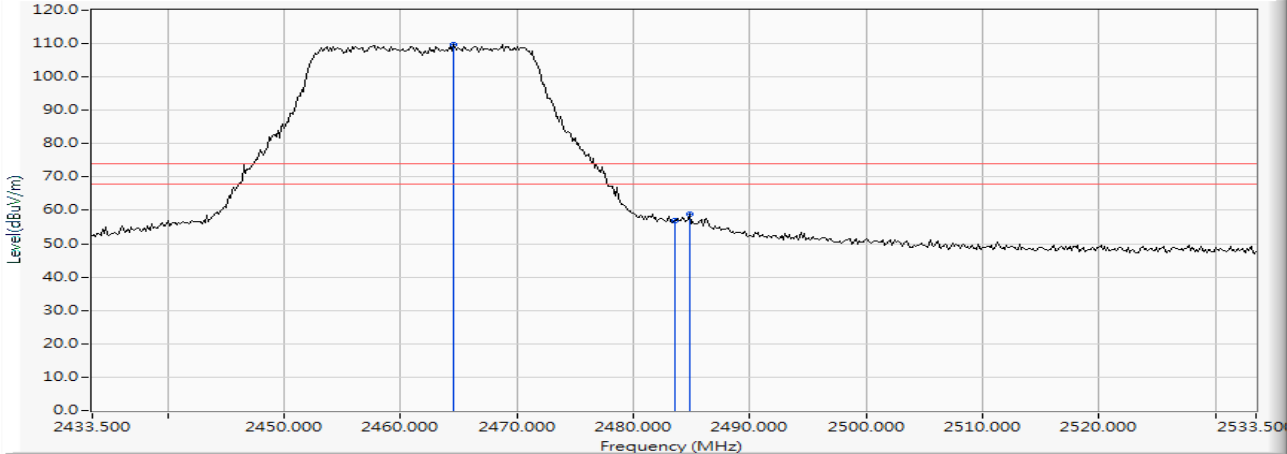

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2464.514	10.561	99.151	109.712	--	--	PEAK
2		2483.500	10.640	46.240	56.881	-17.119	74.000	PEAK
3		2484.804	10.646	48.157	58.803	-15.197	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

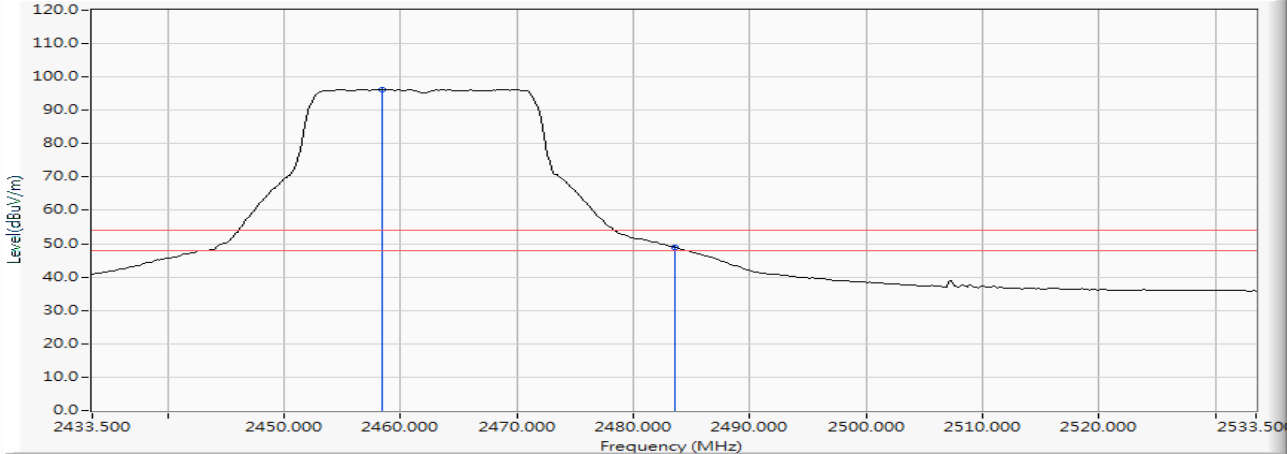

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2458.428	10.534	85.658	96.192	--	--	AVERAGE
2		2483.500	10.640	38.410	49.051	-4.949	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

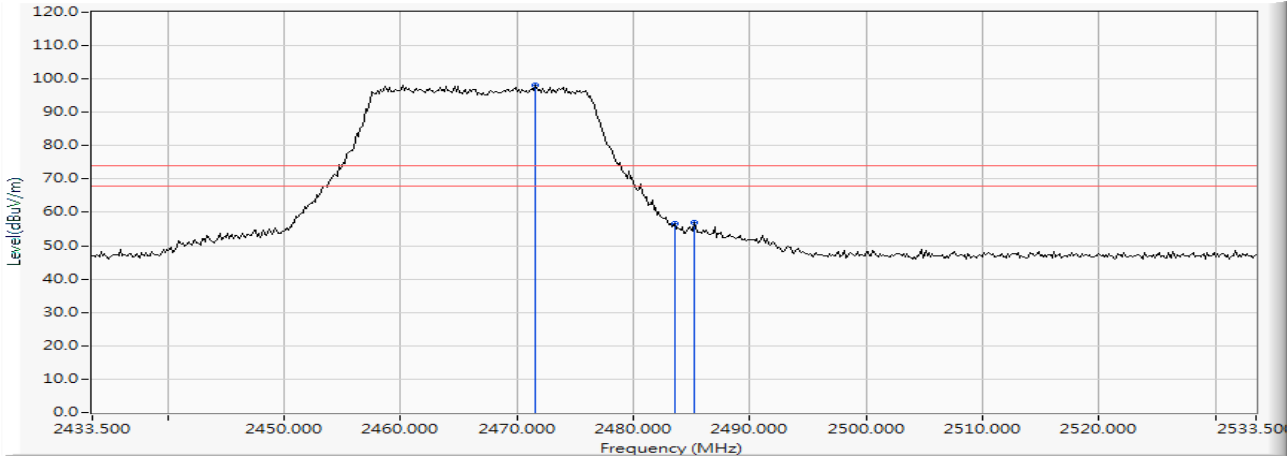

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.616	10.593	87.678	98.271	--	--	PEAK
2		2483.500	10.640	45.864	56.505	-17.495	74.000	PEAK
3		2485.239	10.648	46.297	56.945	-17.055	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

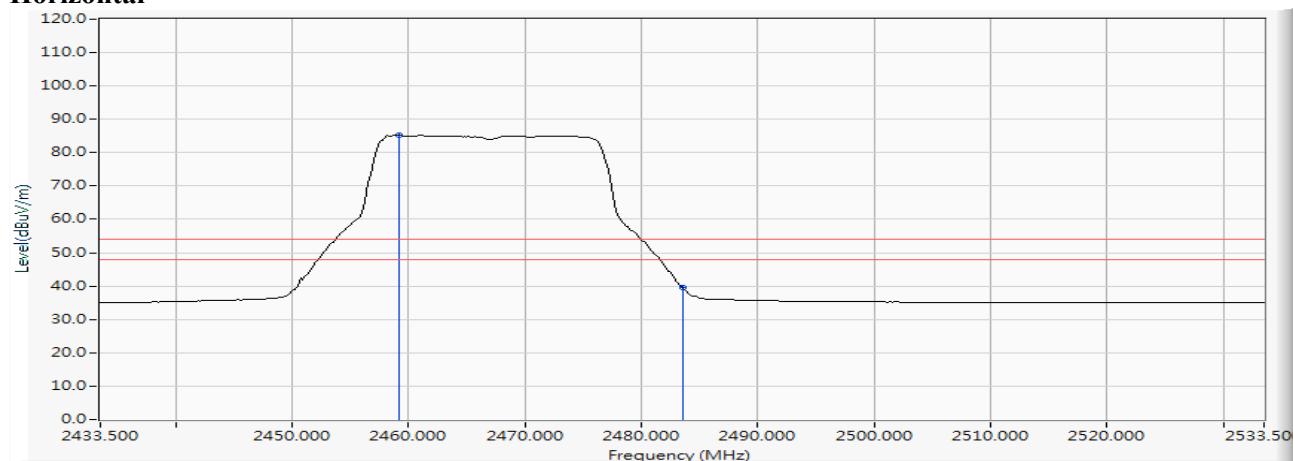Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2459.152	10.537	74.669	85.206	--	--	AVERAGE
2		2483.500	10.640	28.977	39.618	-14.382	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 12 (2467MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

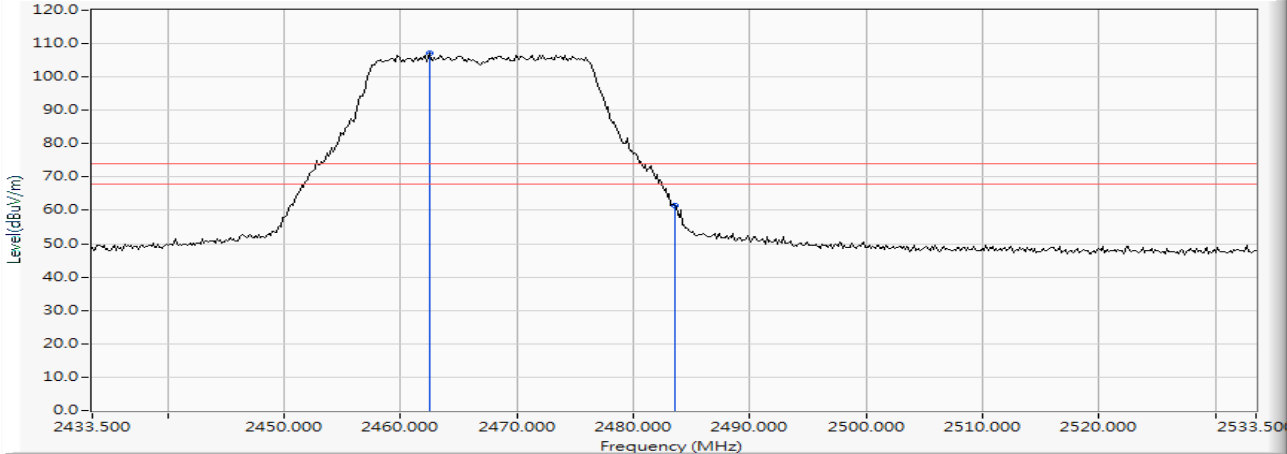

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2462.486	10.552	96.419	106.971	--	--	PEAK
2		2483.500	10.640	50.699	61.340	-12.660	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 12 (2467MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

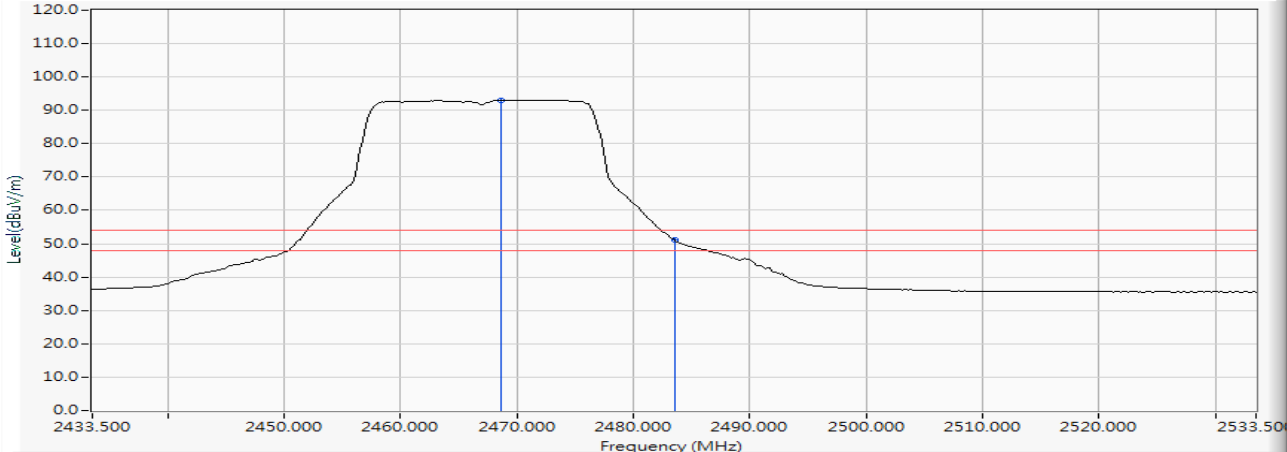

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2468.572	10.579	82.529	93.108	--	--	AVERAGE
2		2483.500	10.640	40.432	51.073	-2.927	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 13 (2472MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

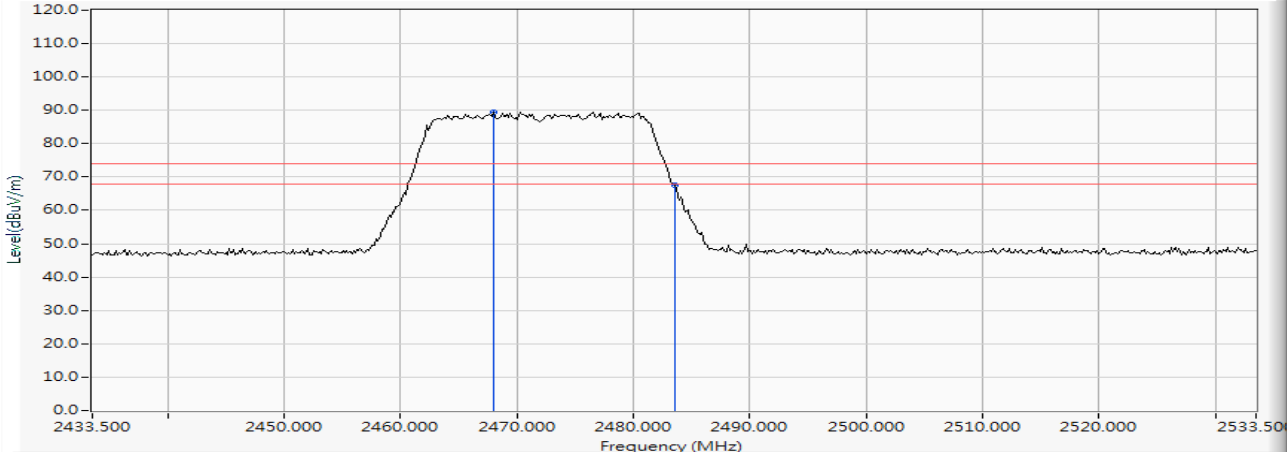

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2467.993	10.576	78.892	89.468	--	--	PEAK
2		2483.500	10.640	56.790	67.431	-6.569	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 13 (2472MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108年04月04日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

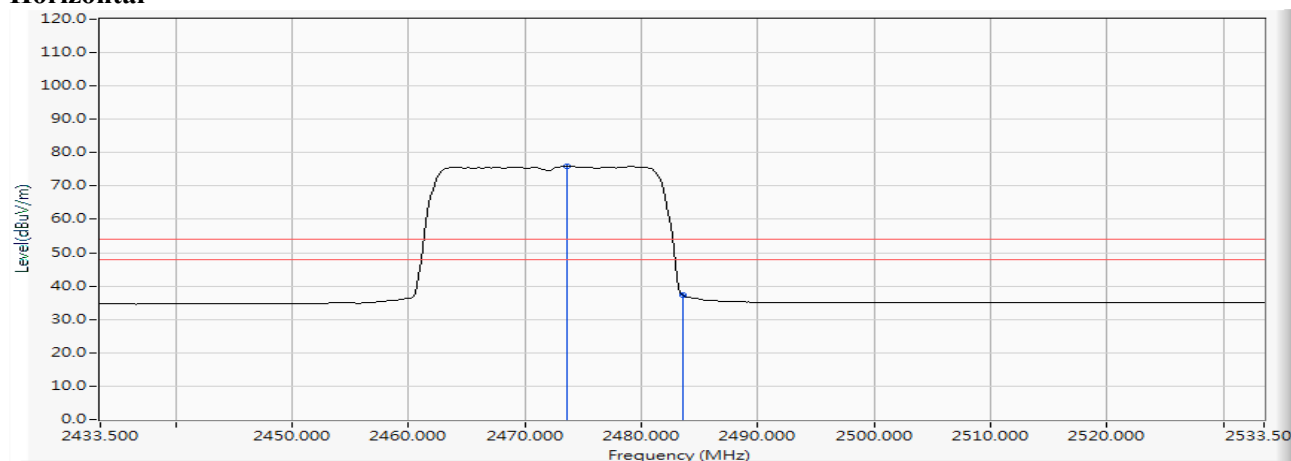Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.645	10.602	65.324	75.926	--	--	AVERAGE
2		2483.500	10.640	26.526	37.167	-16.833	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

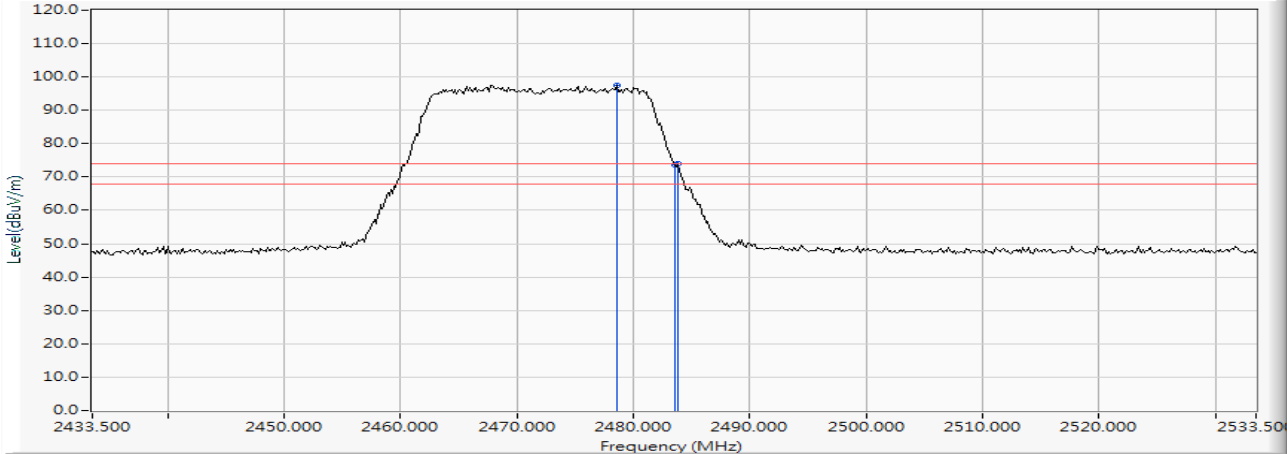

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2478.572	10.623	86.999	97.621	--	--	PEAK
2		2483.500	10.640	62.939	73.580	-0.420	74.000	PEAK
3		2483.790	10.643	63.208	73.850	-0.150	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 13 (2472MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 15: MIMO: 發射器 802.11ax (20MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

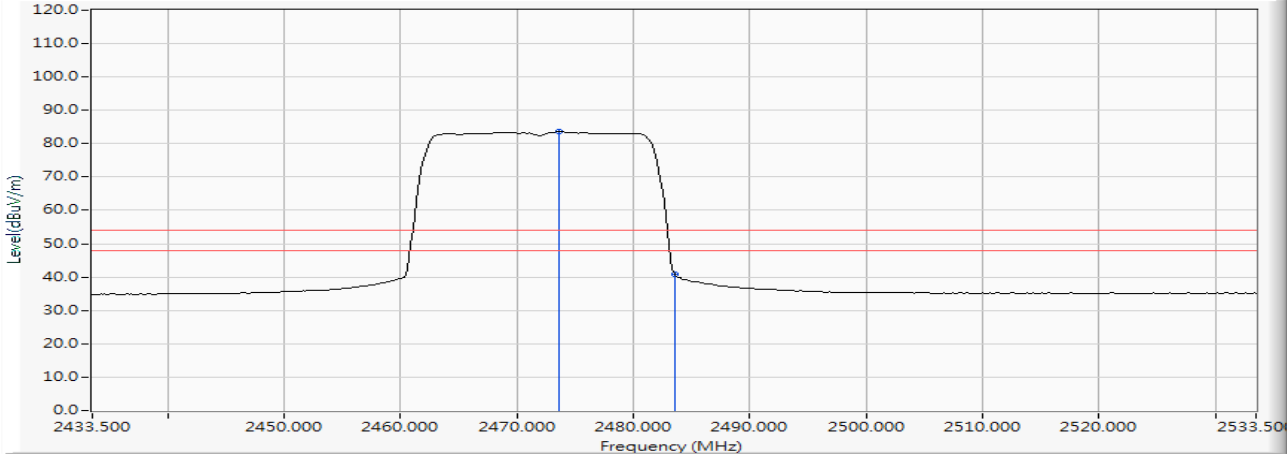

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.645	10.602	73.001	83.603	--	--	AVERAGE
2		2483.500	10.640	30.143	40.784	-13.216	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

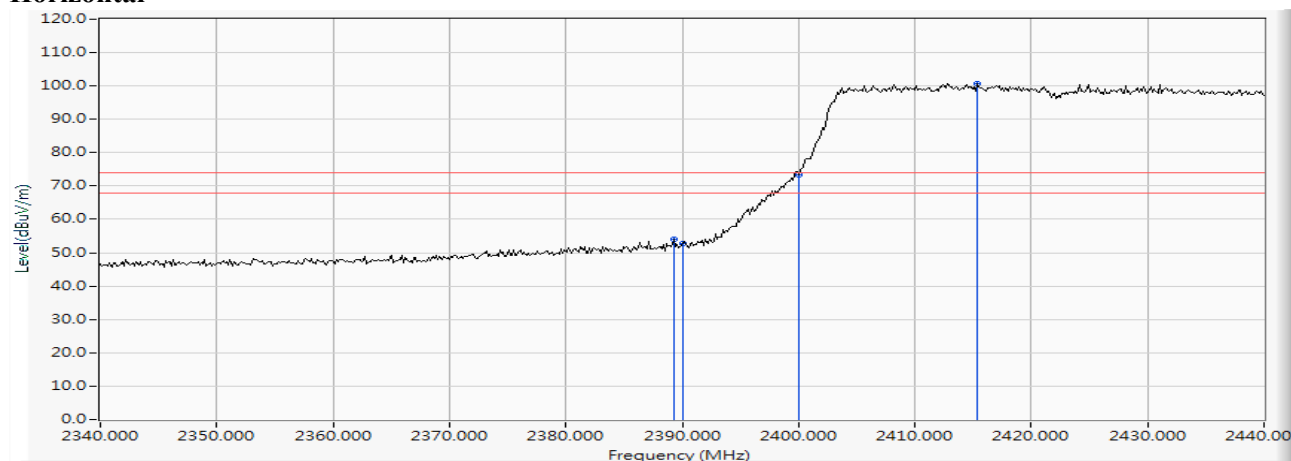Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2389.275	10.260	43.664	53.923	-20.077	74.000	PEAK
2		2390.000	10.262	42.377	52.639	-21.361	74.000	PEAK
3		2400.000	10.304	63.209	73.512	--	--	PEAK
4	*	2415.362	10.365	90.210	100.575	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

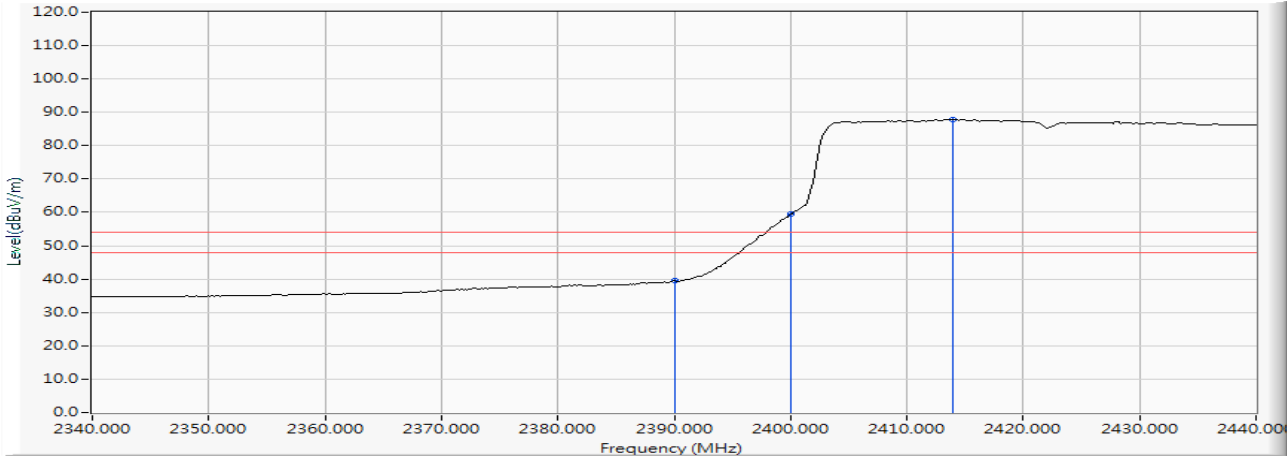

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	29.188	39.450	-14.550	54.000	AVERAGE
2		2400.000	10.304	49.222	59.525	--	--	AVERAGE
3	*	2413.913	10.359	77.512	87.872	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 03 (2422 MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

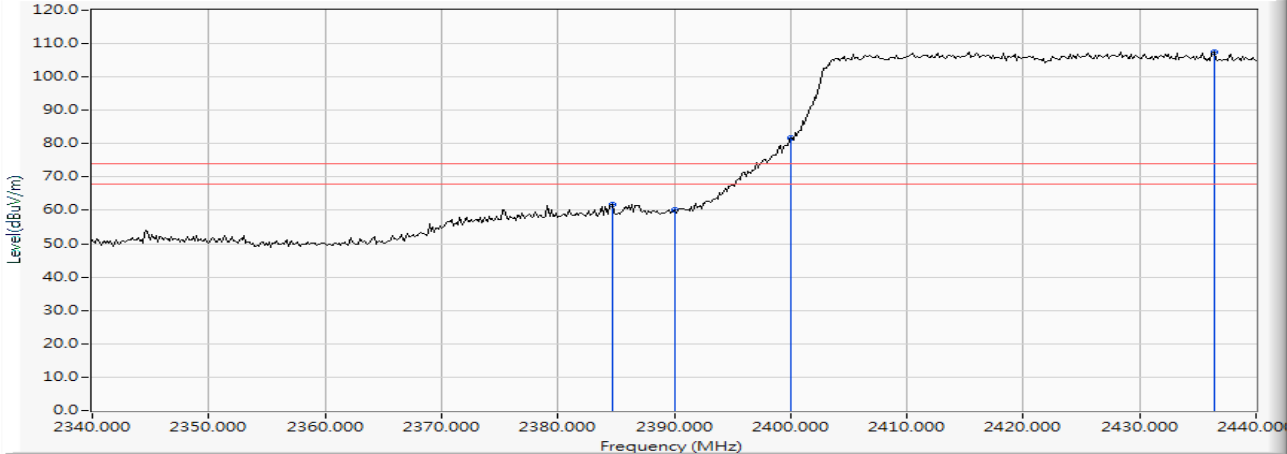

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2384.638	10.240	51.551	61.790	-12.210	74.000	PEAK
2		2390.000	10.262	49.904	60.166	-13.834	74.000	PEAK
3		2400.000	10.304	71.512	81.815	--	--	PEAK
4	*	2436.377	10.454	97.089	107.543	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 03 (2422 MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

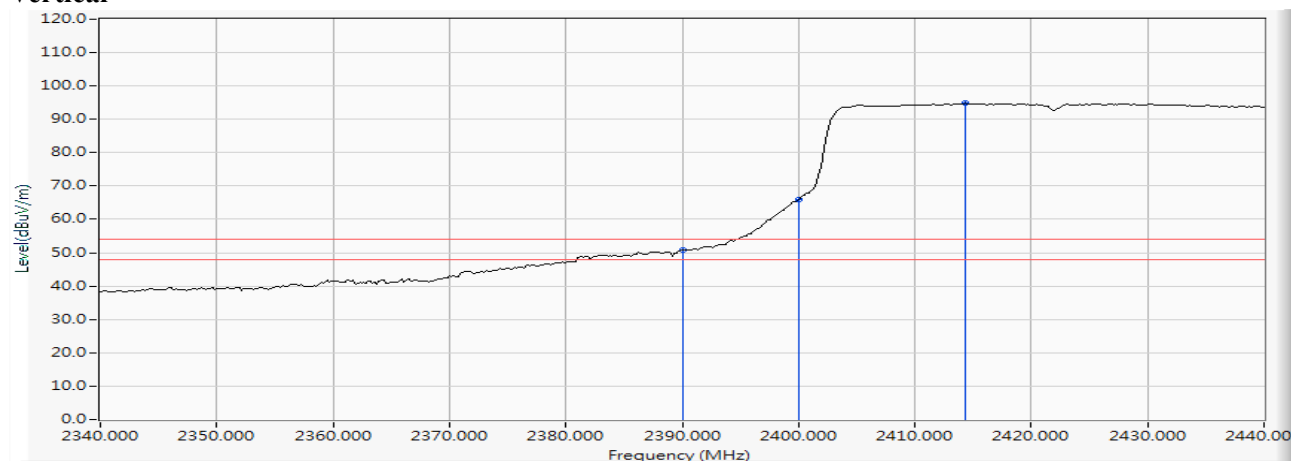Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		2390.000	10.262	40.660	50.922	-3.078	54.000	AVERAGE
2		2400.000	10.304	55.747	66.050	--	--	AVERAGE
3	*	2414.348	10.361	84.419	94.780	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日


測試項目：使用頻率範圍外之任意 100 千赫雜訊

測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

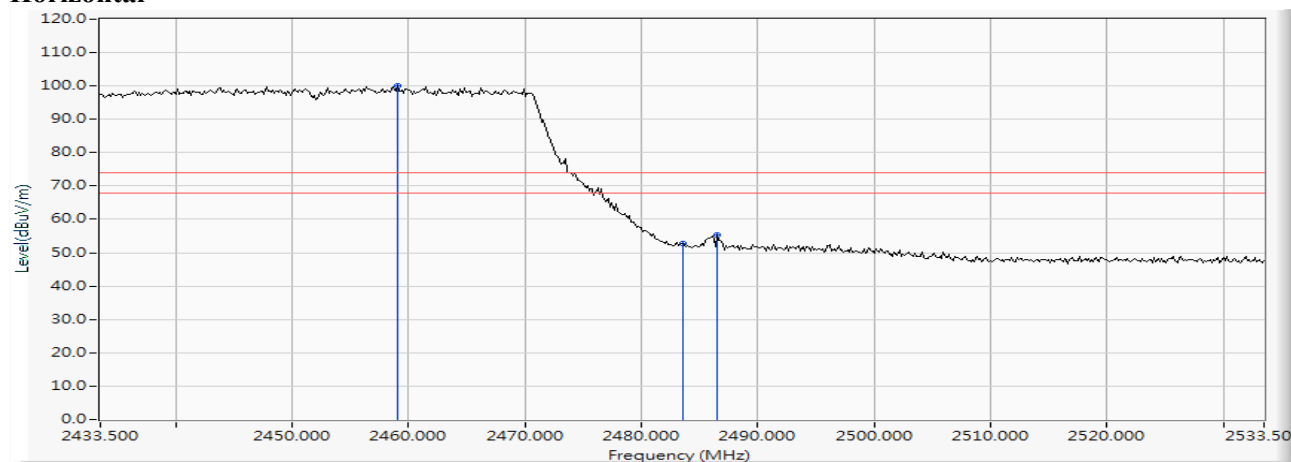Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2459.007	10.536	89.381	99.917	--	--	PEAK
2		2483.500	10.640	42.124	52.765	-21.235	74.000	PEAK
3		2486.543	10.653	44.703	55.356	-18.644	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 09 (2452MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

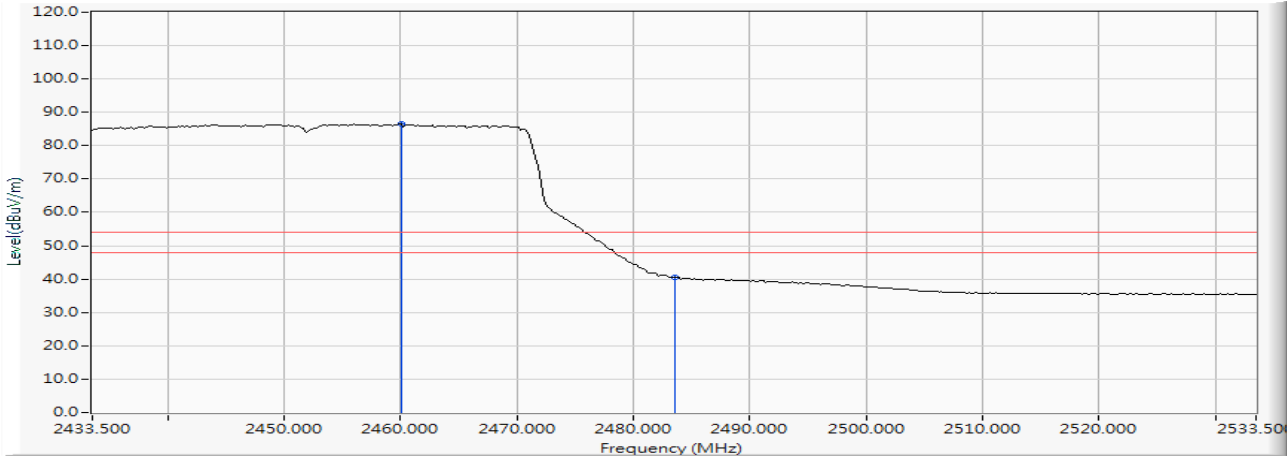

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1	*	2460.022	10.541	75.914	86.455	--	--	AVERAGE
2		2483.500	10.640	29.893	40.534	-13.466	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

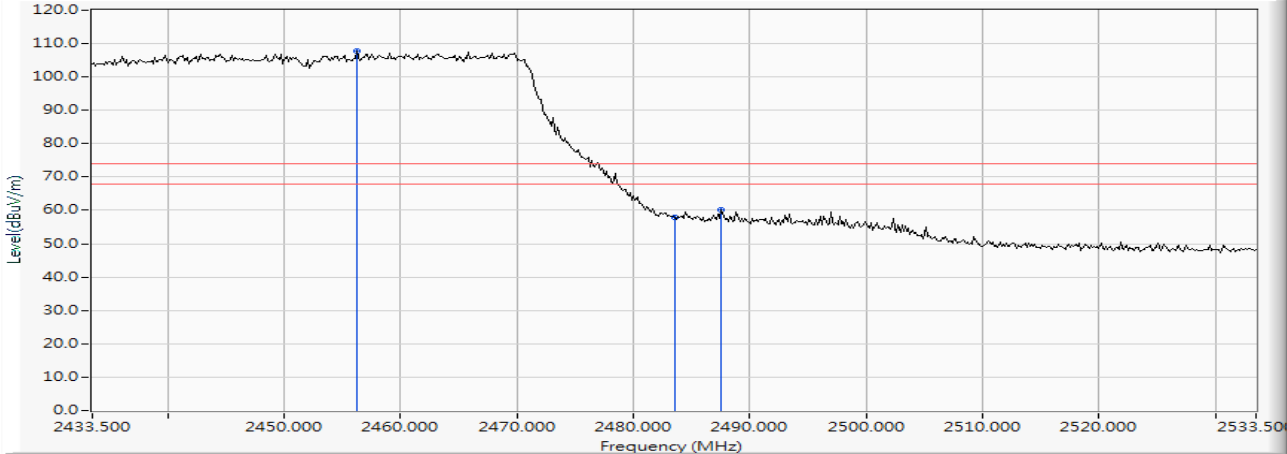

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2456.254	10.525	97.254	107.778	--	--	PEAK
2		2483.500	10.640	47.242	57.883	-16.117	74.000	PEAK
3		2487.558	10.657	49.502	60.159	-13.841	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 09 (2452MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

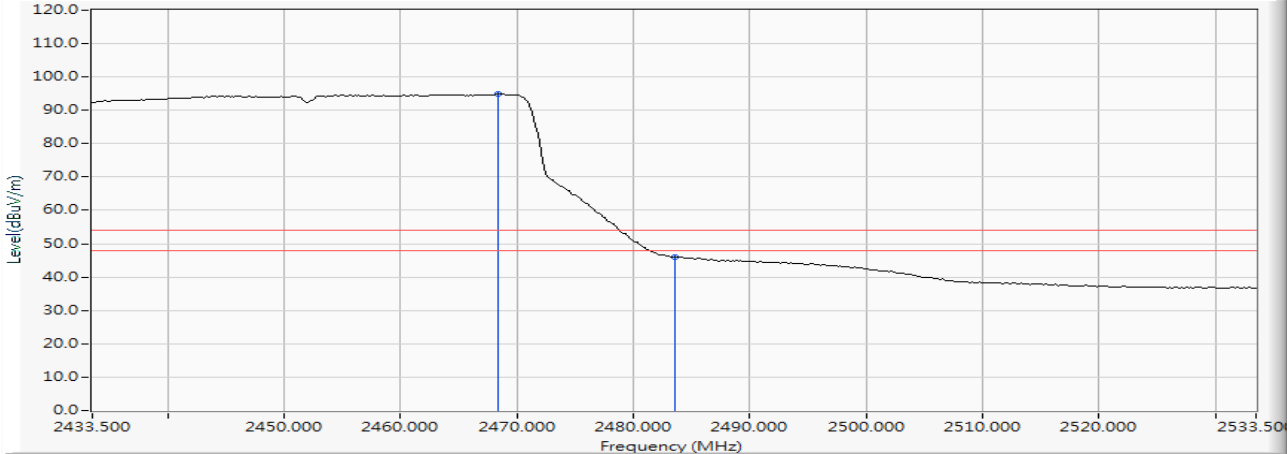

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2468.428	10.579	84.322	94.900	--	--	AVERAGE
2		2483.500	10.640	35.302	45.943	-8.057	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

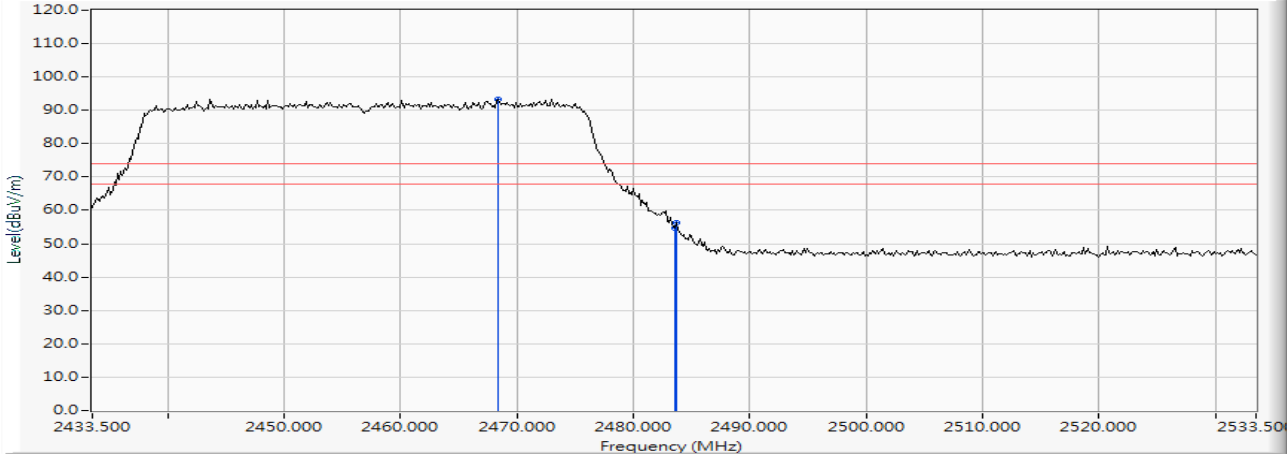

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2468.428	10.579	82.778	93.356	--	--	PEAK
2		2483.500	10.640	43.996	54.637	-19.363	74.000	PEAK
3		2483.645	10.642	45.575	56.217	-17.783	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 10 (2457MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Horizontal

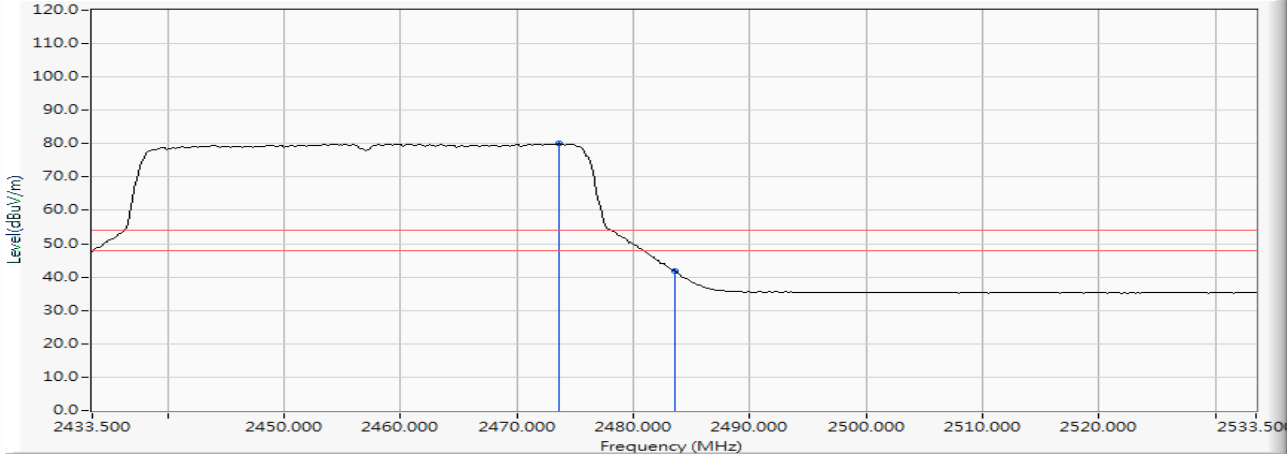

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.645	10.602	69.356	79.958	--	--	AVERAGE
2		2483.500	10.640	31.132	41.773	-12.227	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 10 (2457MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

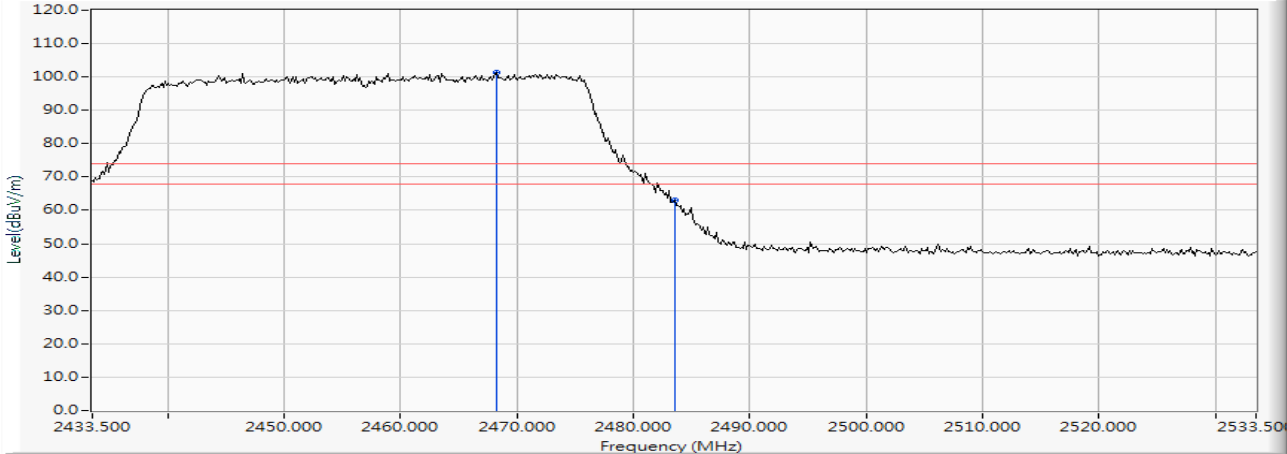

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2468.283	10.578	90.627	101.205	--	--	PEAK
2		2483.500	10.640	52.411	63.052	-10.948	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：CH 10 (2457MHz)

量測天線：3117/00203800

檢測器：峰值 & 平均值

測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊


測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)

測試距離：3 M

環境溫度：20 °C

環境濕度：52 %

Vertical

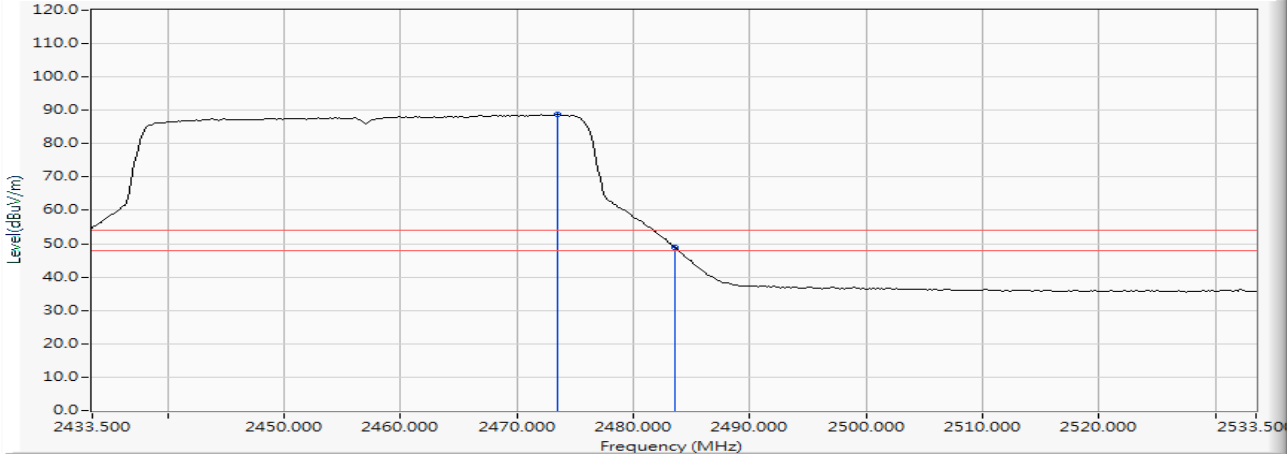

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2473.500	10.601	78.231	88.833	--	--	AVERAGE
2		2483.500	10.640	38.326	48.967	-5.033	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 04 月 04 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

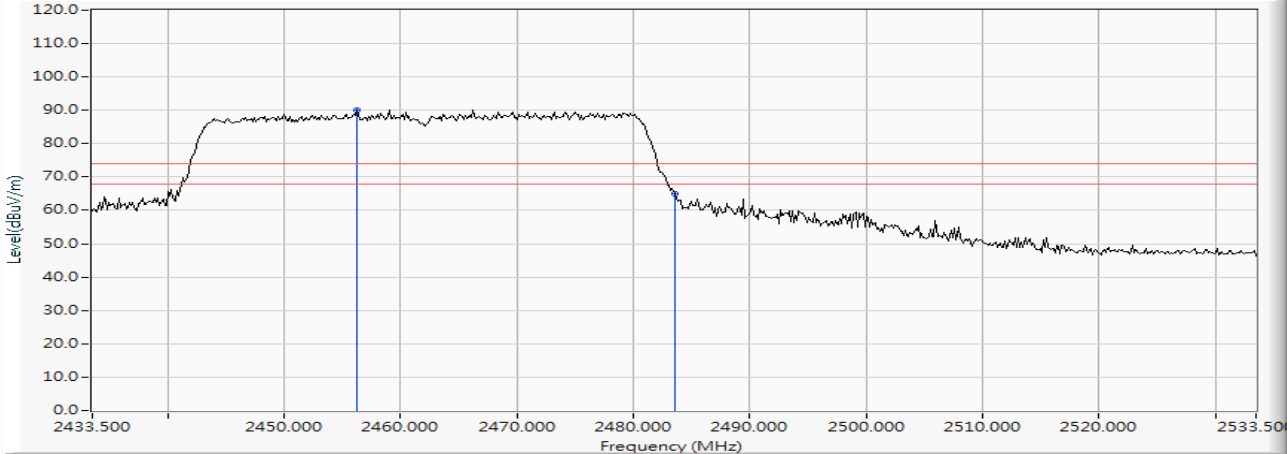

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2456.254	10.525	79.716	90.240	--	--	PEAK
2		2483.500	10.640	54.332	64.973	-9.027	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 03 月 30 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Horizontal

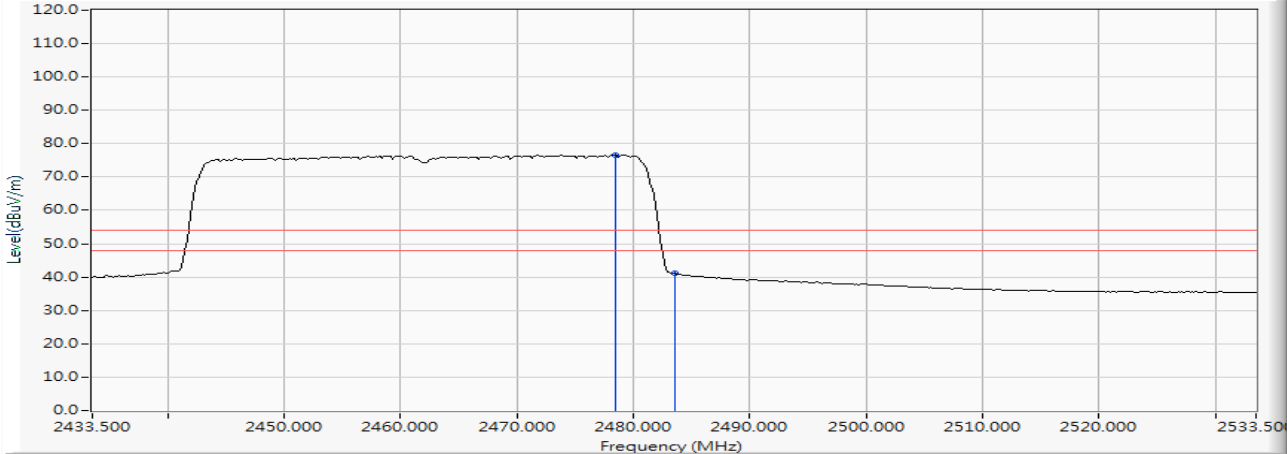

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2478.428	10.622	65.874	76.496	--	--	AVERAGE
2		2483.500	10.640	30.402	41.043	-12.957	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 03 月 30 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

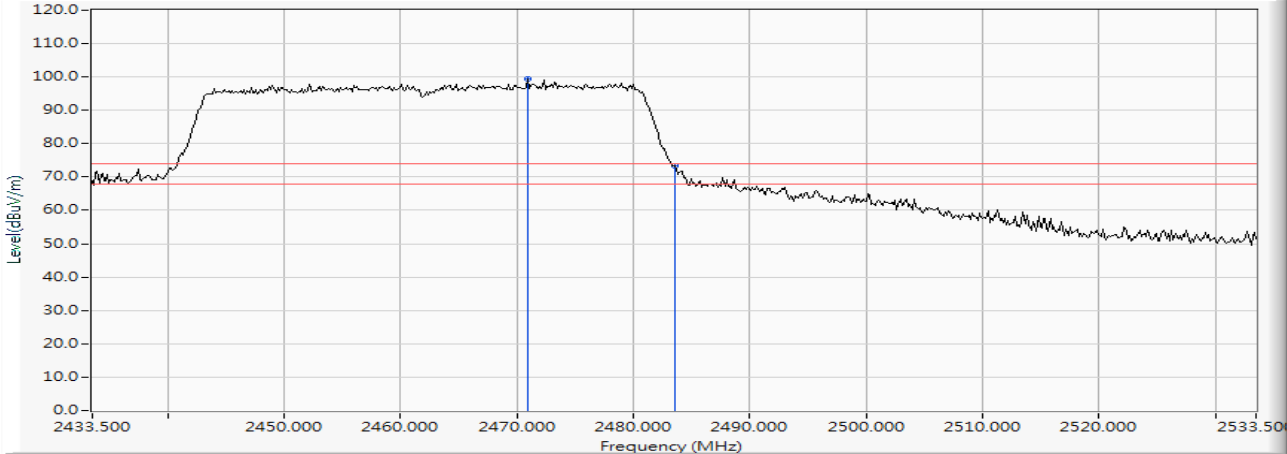

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2470.891	10.590	88.727	99.317	--	--	PEAK
2		2483.500	10.640	62.762	73.403	-0.597	74.000	PEAK


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW
測試頻道：CH 11 (2462MHz)
量測天線：3117/00203800
檢測器：峰值 & 平均值
測試日期：108 年 03 月 30 日

測試項目：使用頻率範圍外之任意 100 千赫雜訊
測試模式：Mode 16: MIMO: 發射器 802.11ax (40MHz)
測試距離：3 M
環境溫度：20 °C
環境濕度：52 %

Vertical

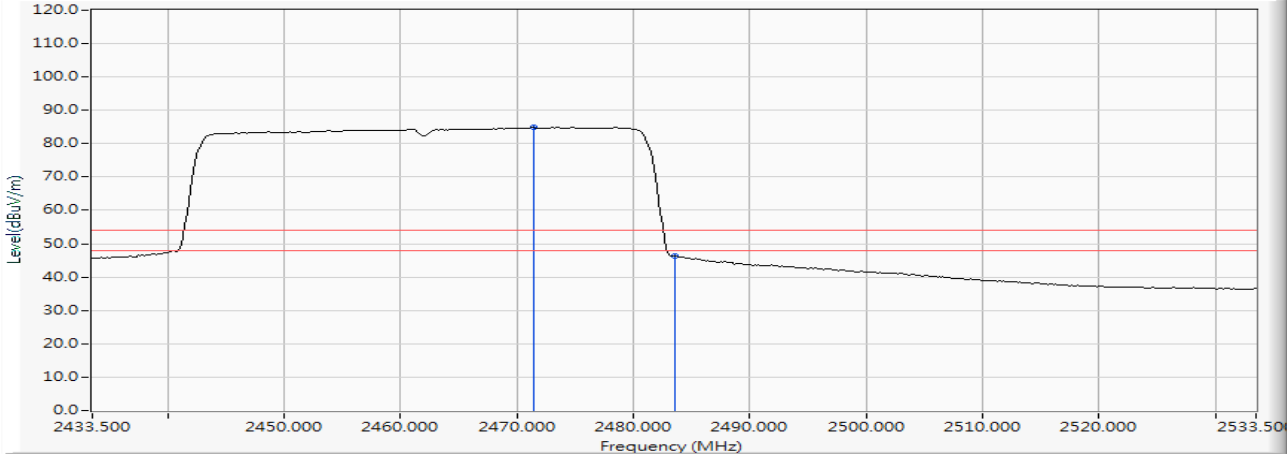

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	2471.471	10.593	74.331	84.923	--	--	AVERAGE
2		2483.500	10.640	35.585	46.226	-7.774	54.000	AVERAGE

Note:

- 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
- 2. “*”, means this data is the worst emission level.
- 3. Measurement Level = Reading Level + Correct Factor

使用頻率範圍外之任意 100 千赫雜訊測試結果:


PASS

7. Duty Cycle

7.1. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀RF輸入端，
待測物應在正常發射狀態下量測。

7.2. 測試架構圖

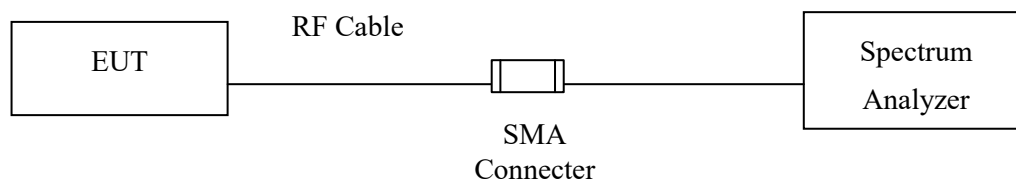

7.3. 量測不確定度

此項測試之量測不確定度為 $\pm 2.31\text{msec}$

7.4. Duty Cycle 測試結果

待測物名稱：Intel® Wi-Fi 6 AX200

待測物型號：AX200NGW

測試頻道：--

量測天線：--

檢測器：峰值

測試日期：108年04月03日

測試項目：Duty Cycle

測試模式：--

測試距離：Conducted

環境溫度：20 °C

環境濕度：50 %

Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$
$$\text{Duty Factor} = 10 \text{ Log } (1/\text{Duty Cycle})$$

Results:

SISO A

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	8.3478	8.6087	96.97	0.13
802.11g	2.0870	2.3478	88.89	0.51
802.11n20	24.7681	25.0580	98.84	0.05
802.11n40	17.8841	18.1739	98.41	0.07
802.11ax20	24.7681	25.0580	98.84	0.05
802.11ax40	18.6957	18.9855	98.47	0.07


SISO B

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	8.3768	8.6377	96.98	0.13
802.11g	2.0870	2.3623	88.35	0.54
802.11n20	24.7681	25.0580	98.84	0.05
802.11n40	17.8621	18.1159	98.60	0.06
802.11ax20	24.7826	25.0725	98.84	0.05
802.11ax40	18.6957	18.9855	98.47	0.07

MIMO


2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11n20	18.5797	18.8406	98.62	0.06
802.11n40	8.9420	9.2029	97.17	0.12
802.11ax20	18.7246	18.9855	98.63	0.06
802.11ax40	9.3768	9.6377	97.29	0.12

802.11b (SISO A)

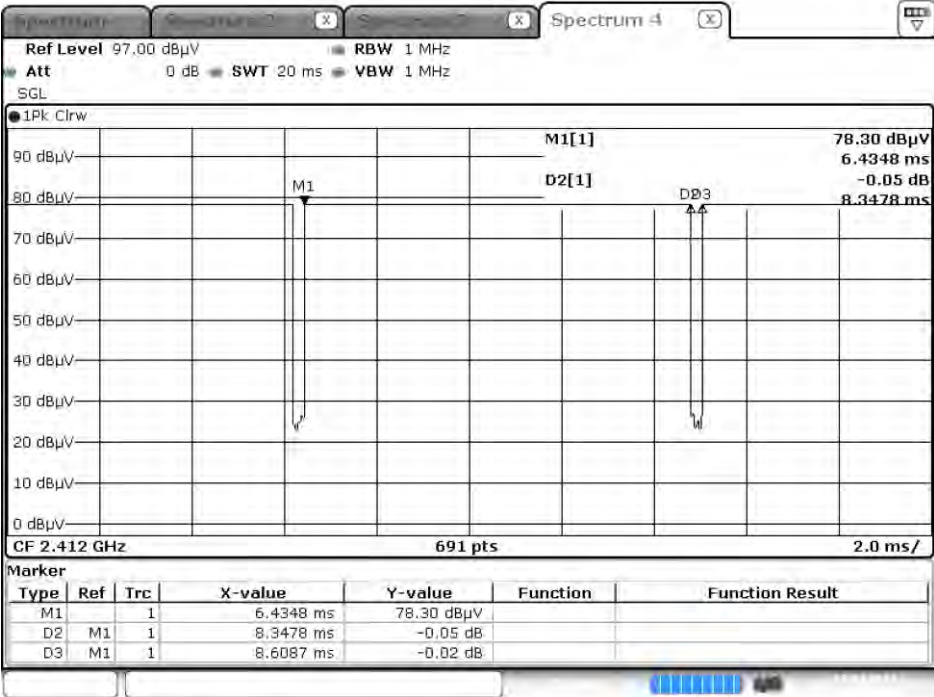


Date: 3.APR.2019 20:20:05

802.11g (SISO A)

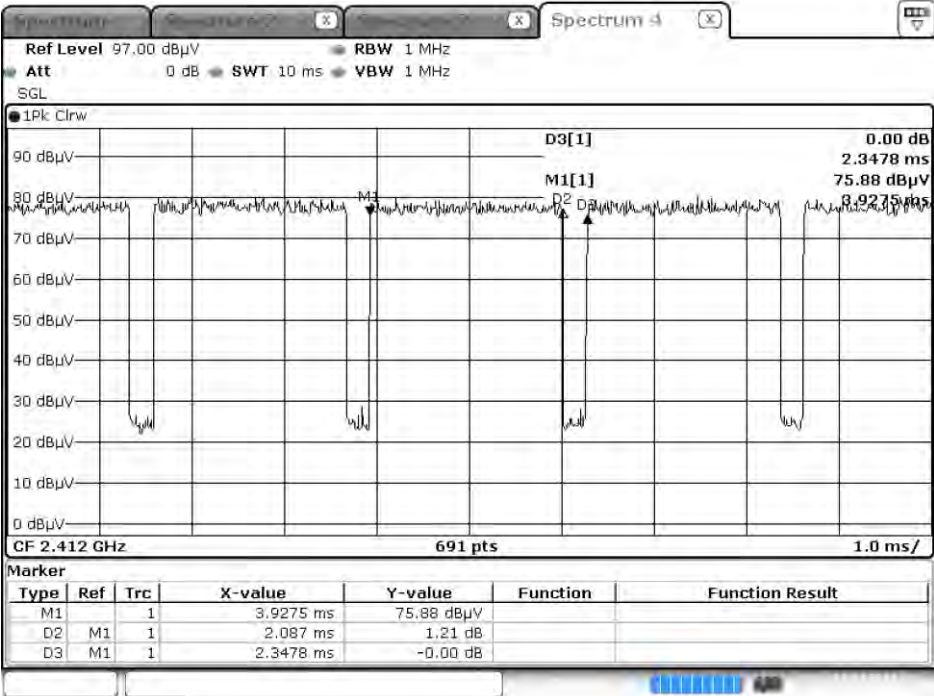


Date: 3.APR.2019 20:20:45

802.11n20 (SISO A)

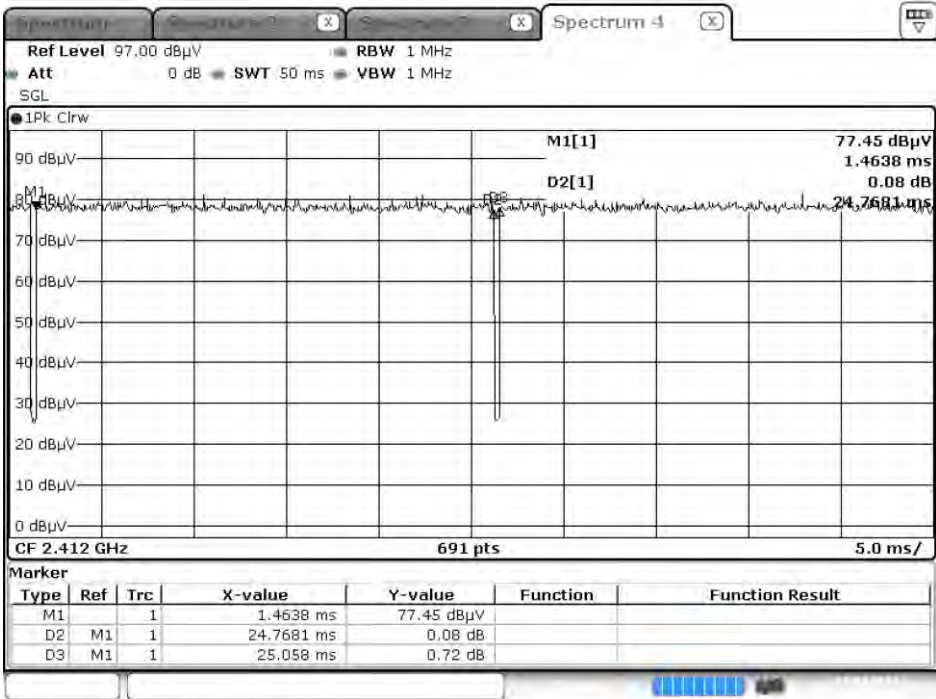


Date: 3.APR.2019 20:21:31

802.11n40 (SISO A)

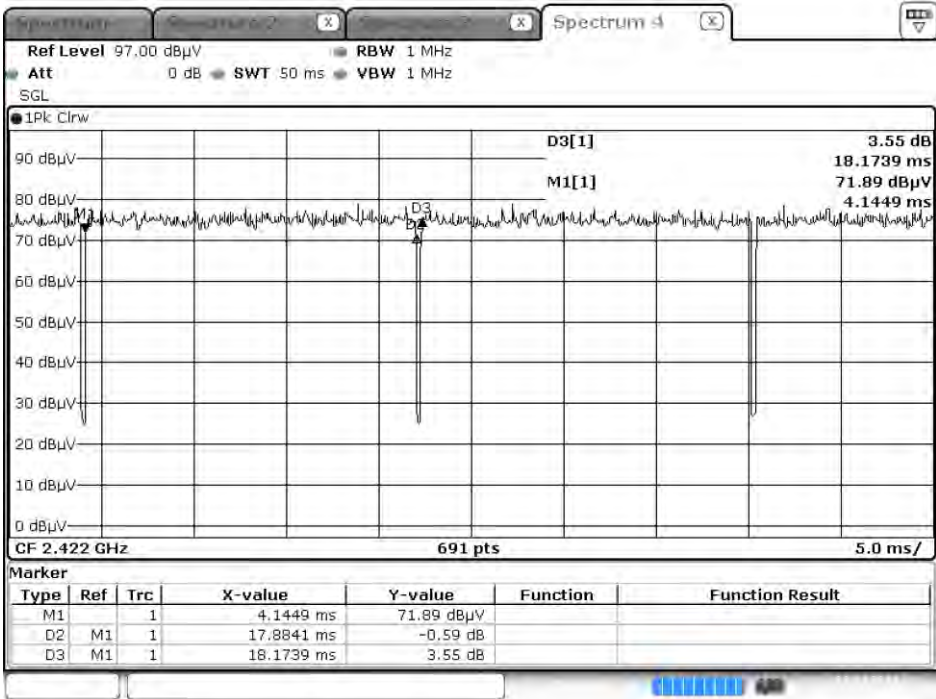


Date: 3.APR.2019 20:22:13

802.11ax20 (SISO A)

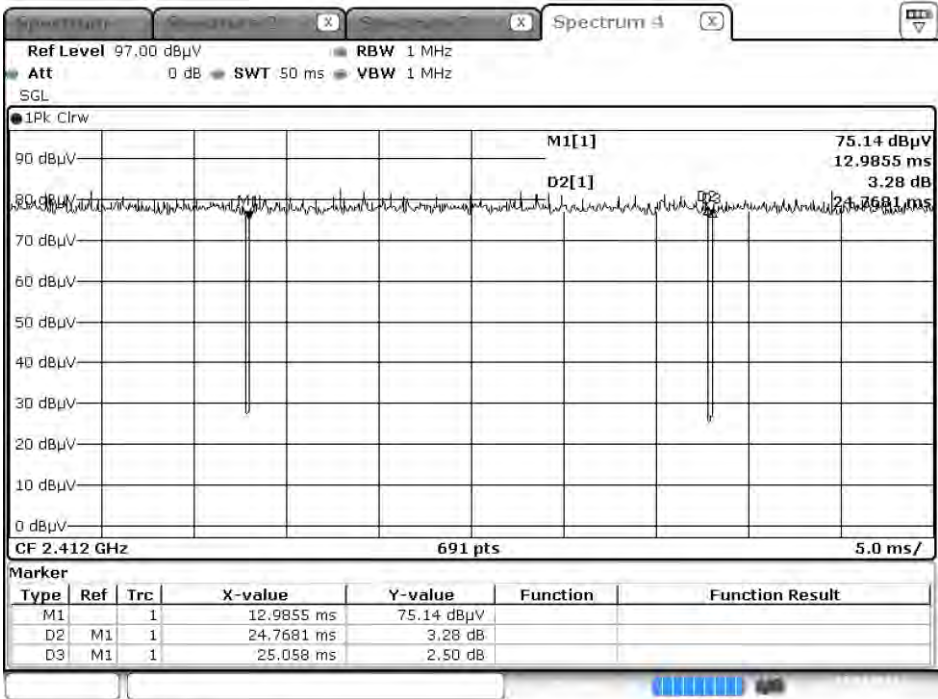


Date: 3.APR.2019 20:23:36

802.11ax40 (SISO A)

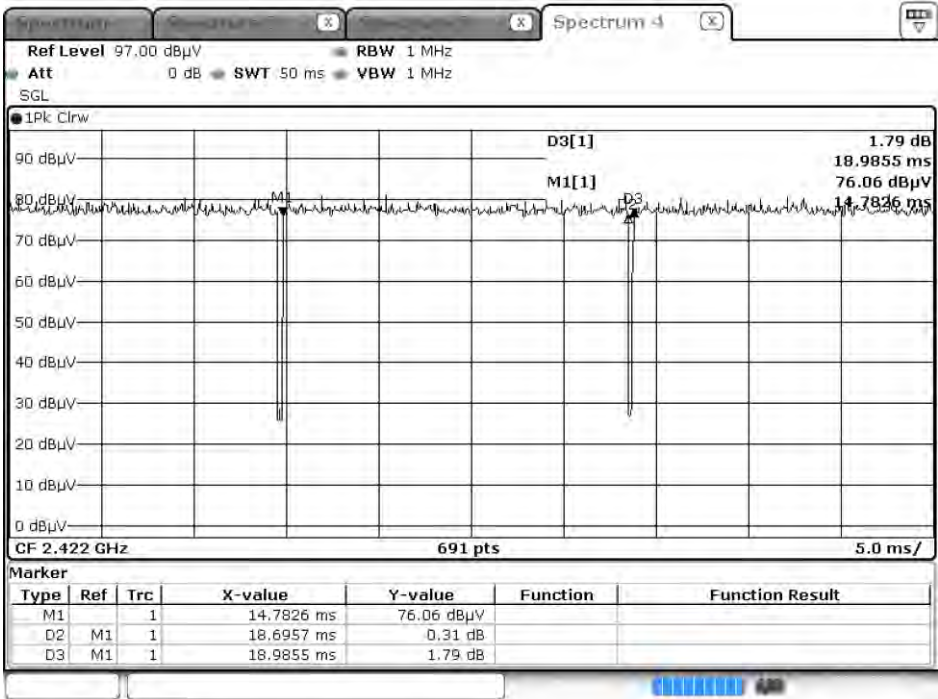


Date: 3.APR.2019 20:24:35

802.11b (SISO B)

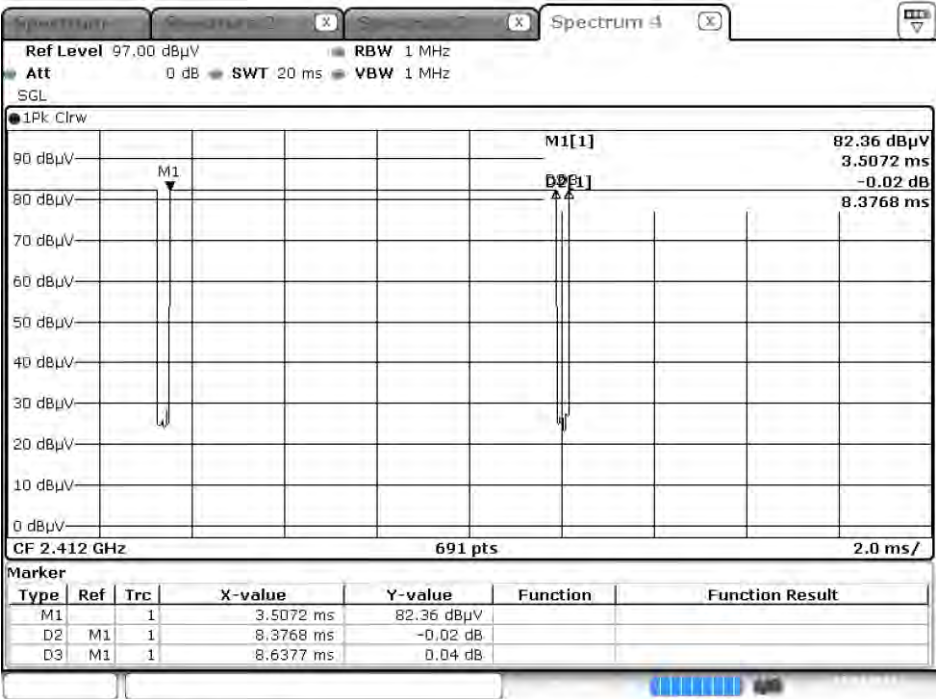


Date: 3.APR 2019 20:34:23

802.11g (SISO B)

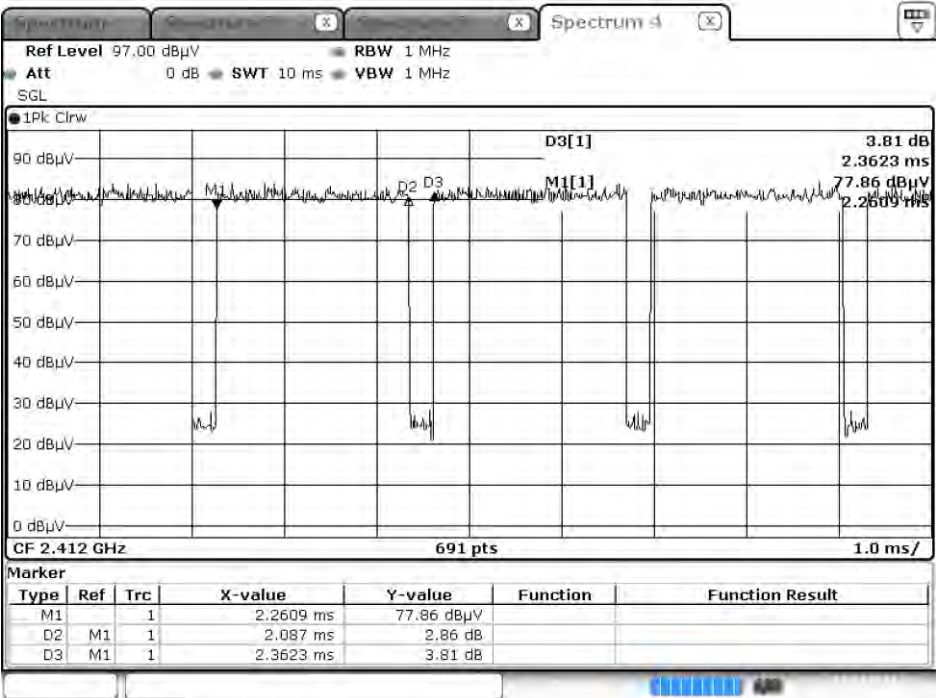


Date: 3.APR 2019 20:35:09

802.11n20 (SISO B)

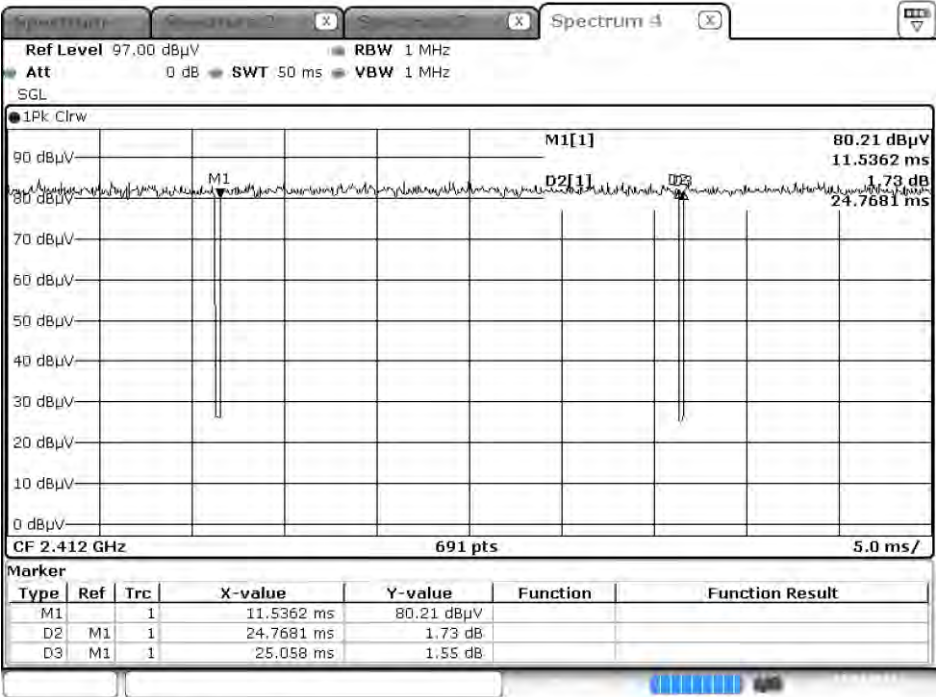


Date: 3.APR.2019 20:35:54

802.11n40 (SISO B)

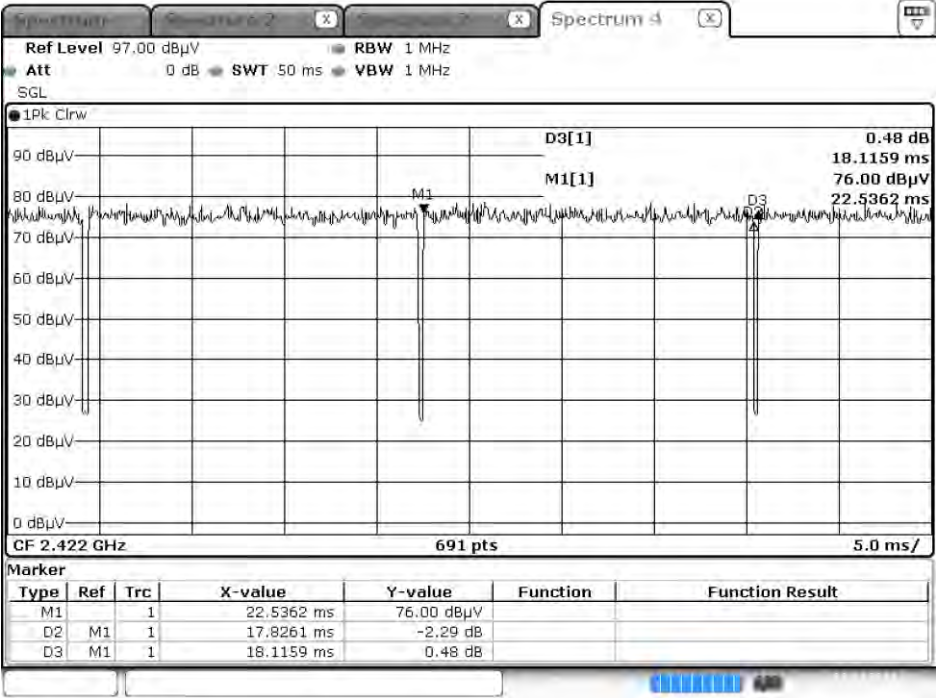


Date: 3.APR.2019 20:36:31

802.11ax20 (SISO B)

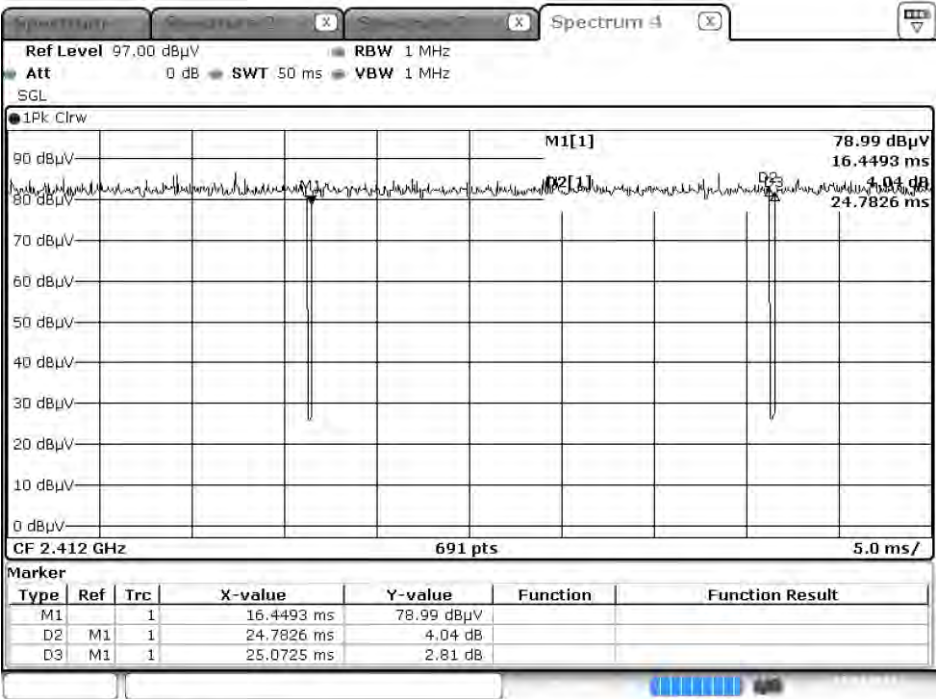


Date: 3.APR.2019 20:37:27

802.11ax40 (SISO B)

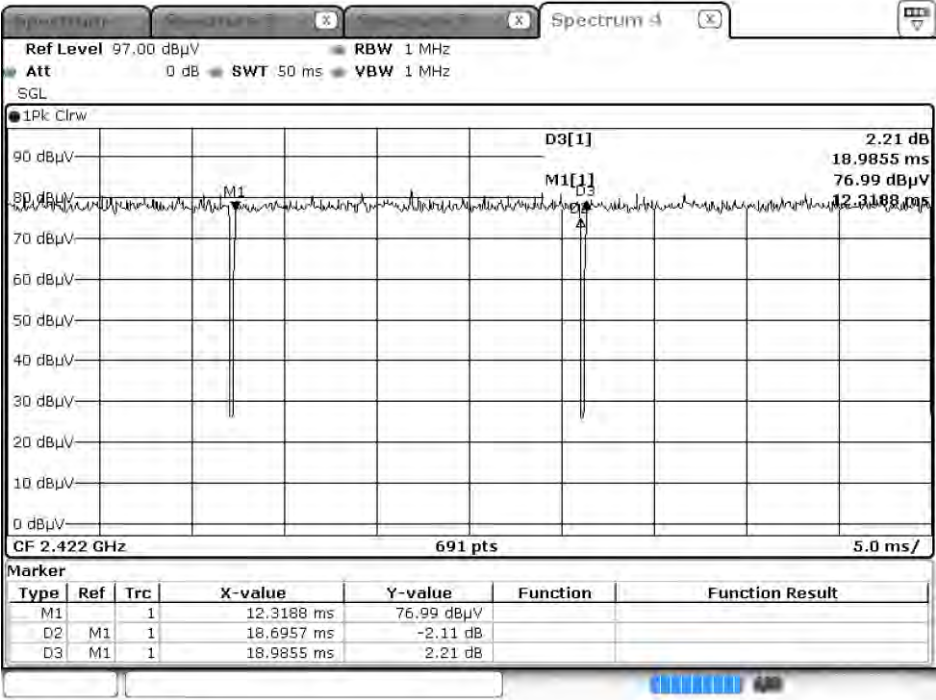


Date: 3.APR.2019 20:39:21

802.11n20 (MIMO)

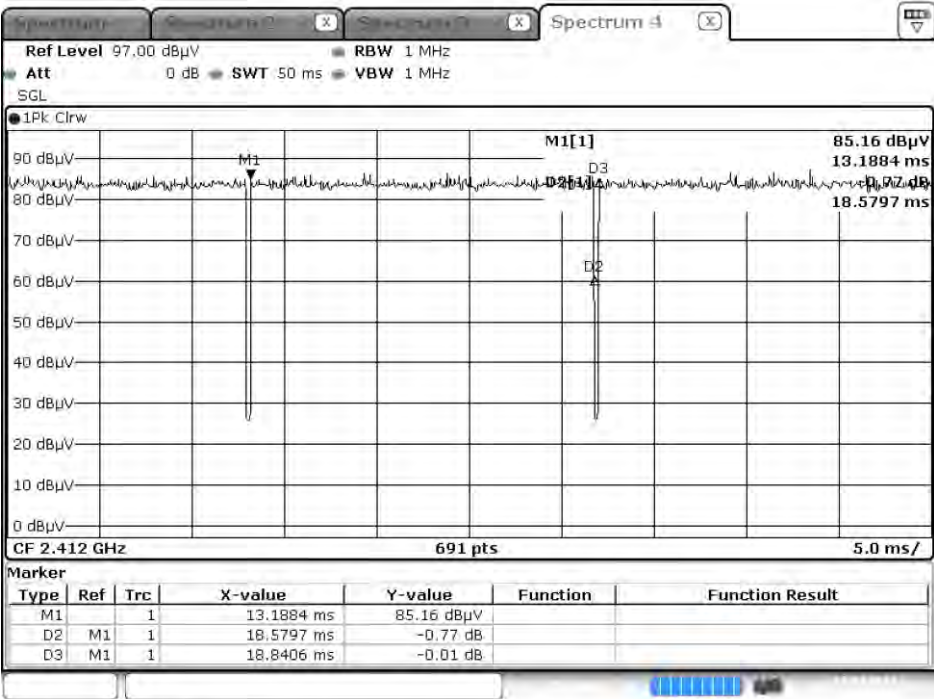


Date: 3.APR.2019 20:48:29

802.11n40 (MIMO)

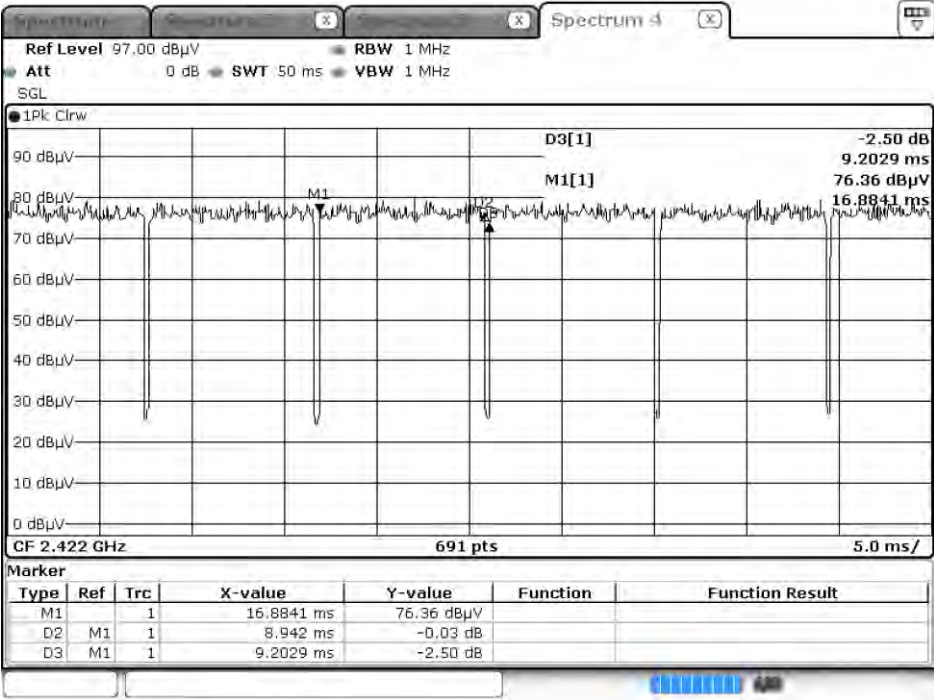


Date: 3.APR.2019 20:49:06

802.11ax20 (MIMO)

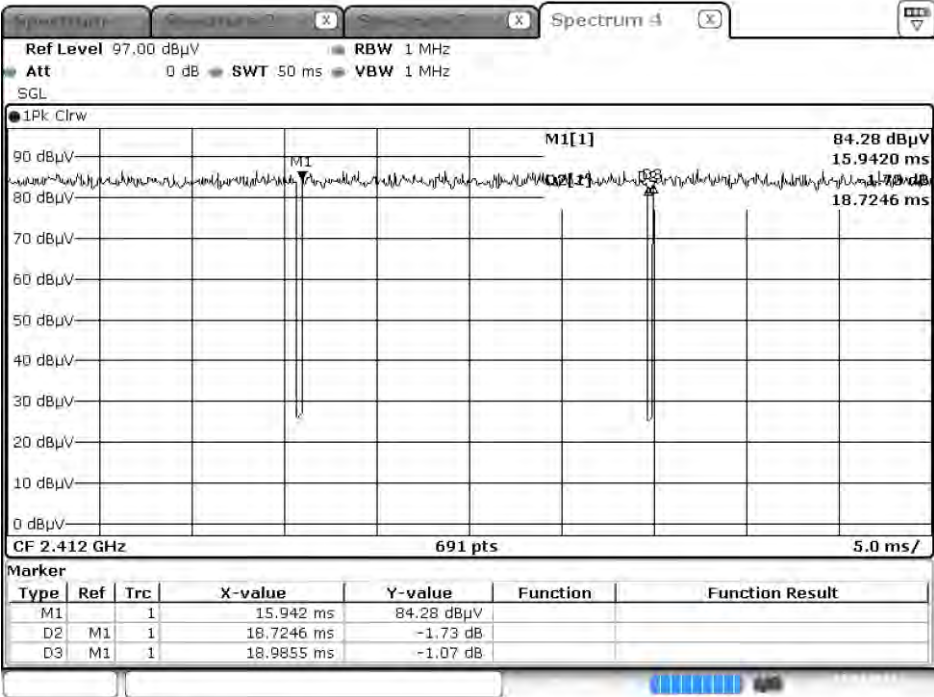

Date: 3.APR.2019 20:50:01

802.11ax40 (MIMO)

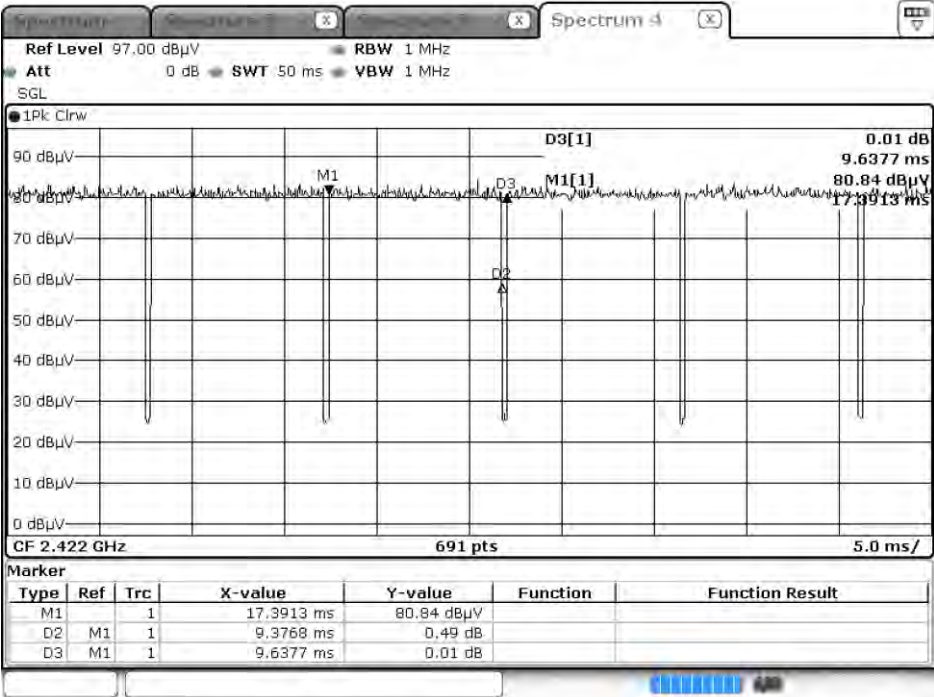


Date: 3.APR.2019 20:50:41

附件 1: 待測物測試擺設相片

測試相片：輻射測試 正面相片



測試相片：輻射測試 背面相片

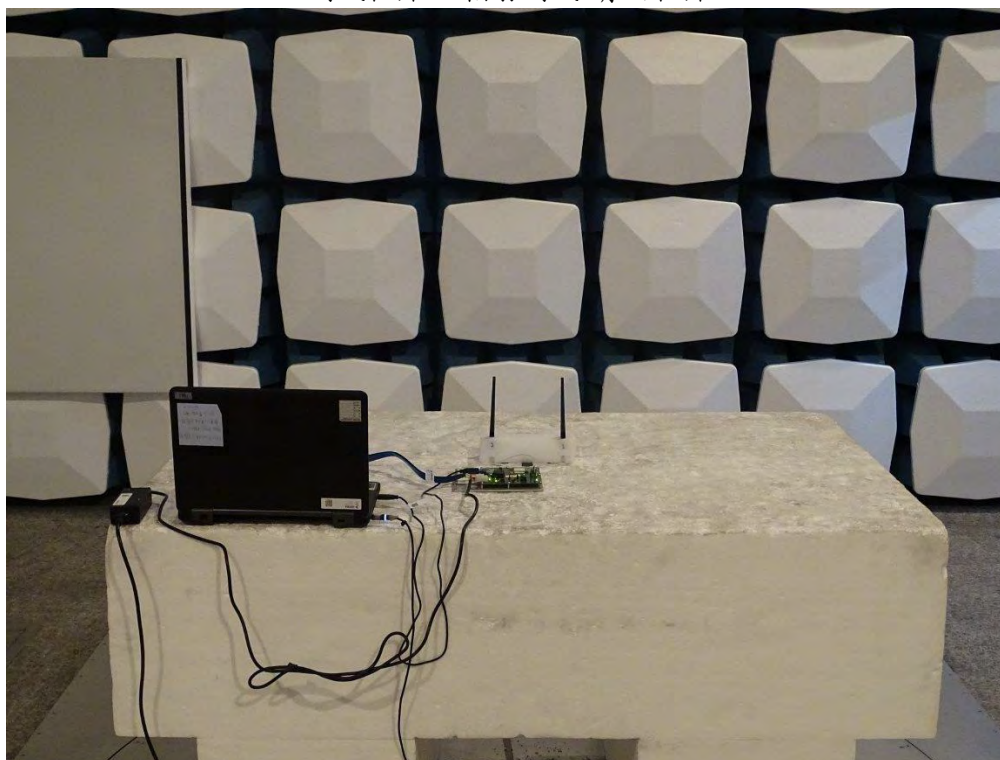

測試相片：輻射測試 正面相片(Horn)



測試相片：輻射測試 背面相片(Horn)

