附錄 二

受測裝置之測試照片

1 電源傳導干擾電壓之配置照片

正 面 照 片

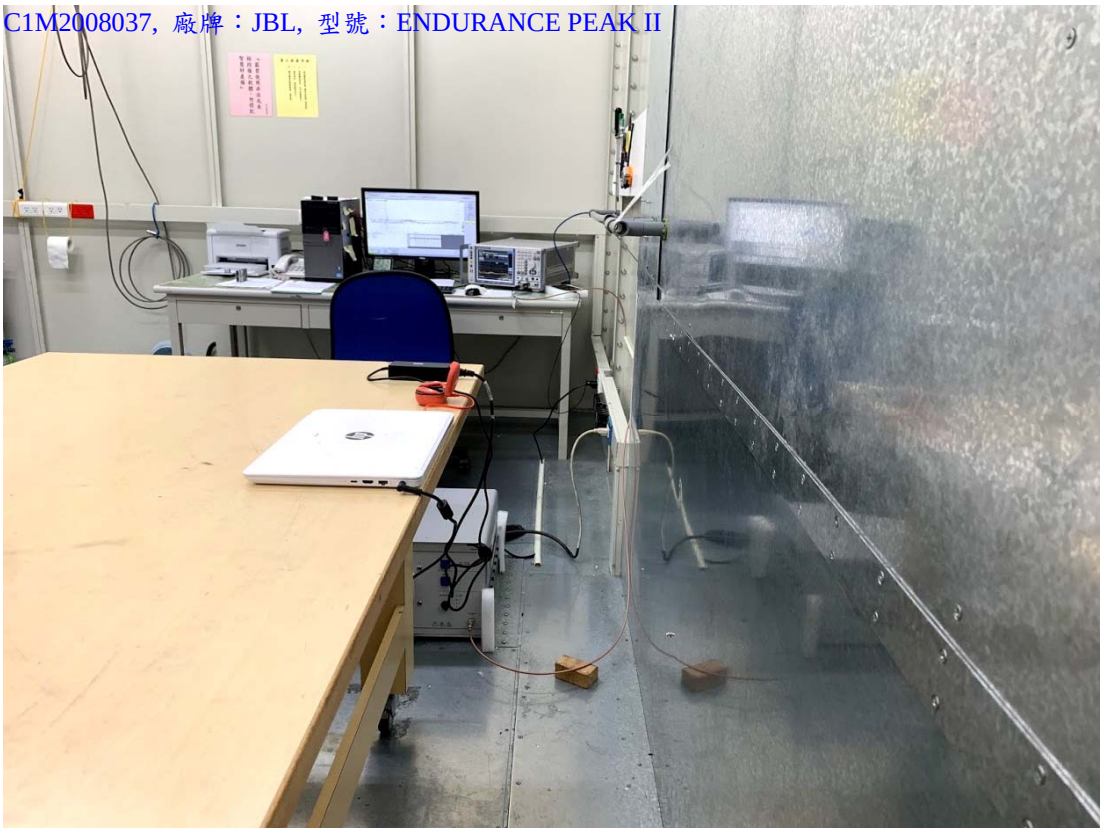

背 面 照 片

2 輻射量測之配置照片

2.1. 量測頻率範圍:30MHz-1GHz

Charge 模式

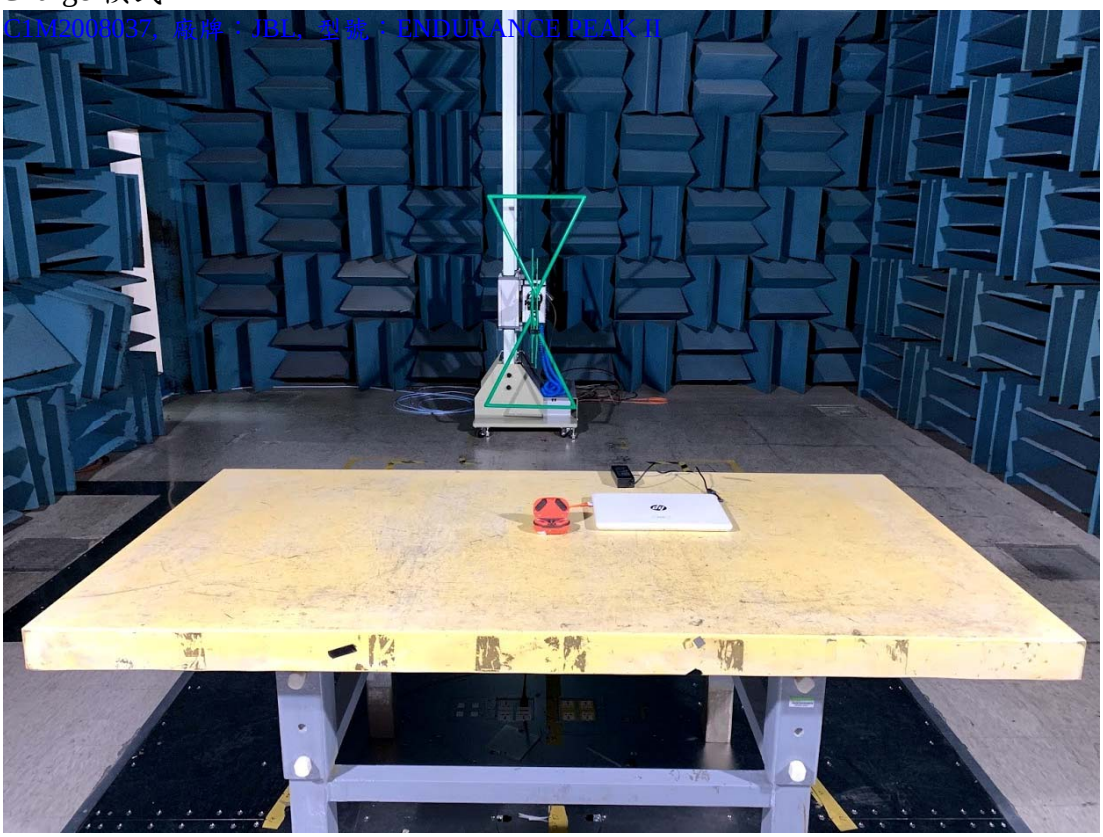

Charge 模式(特寫照)

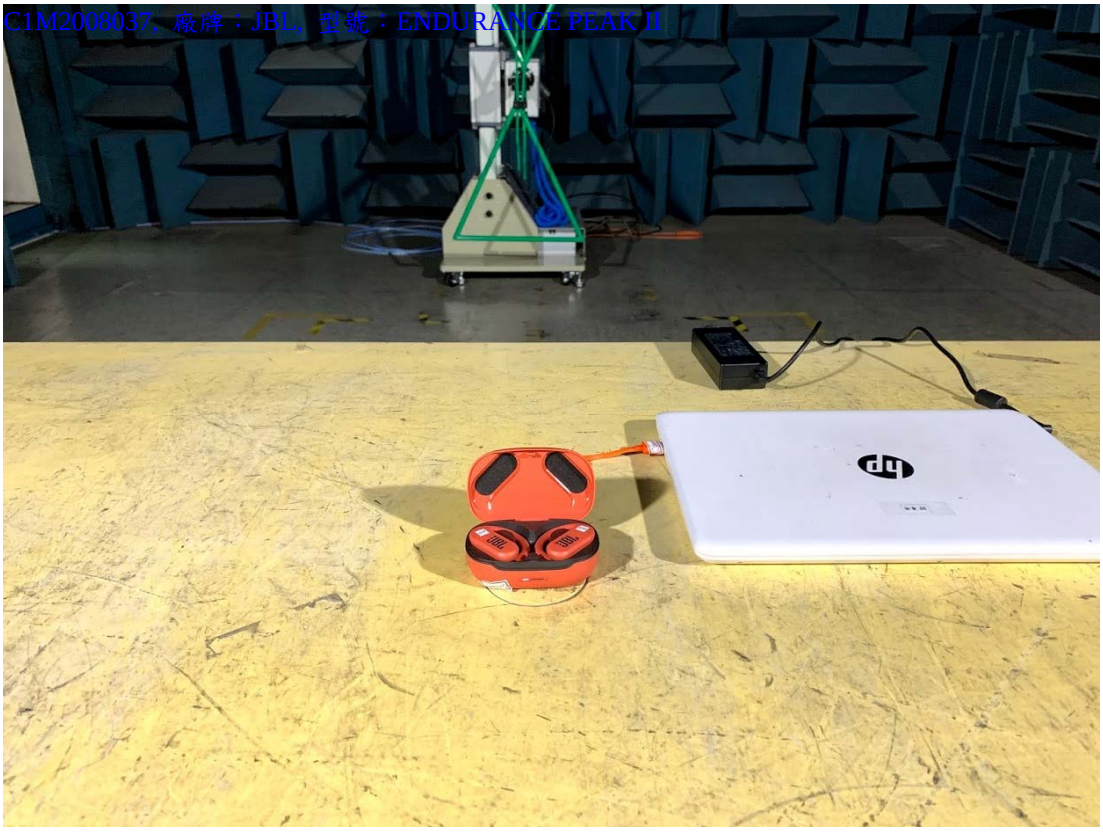

Normal 模式

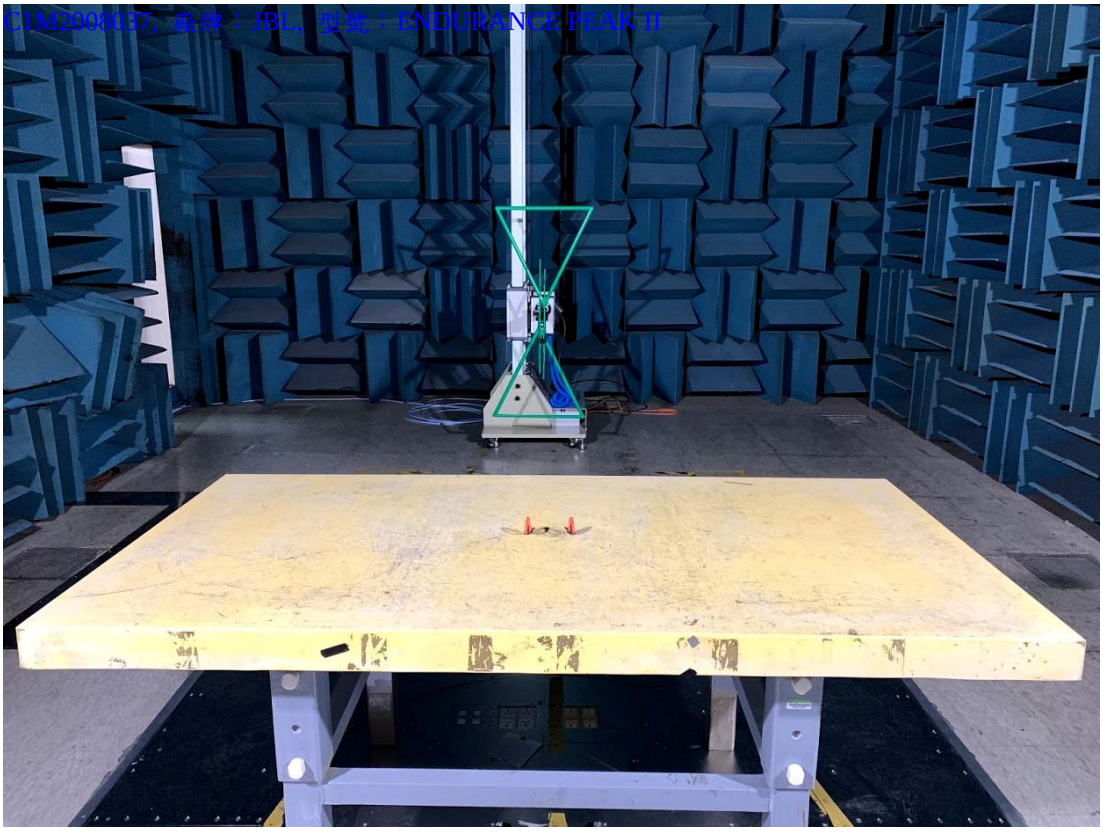

Normal 模式(特寫照)

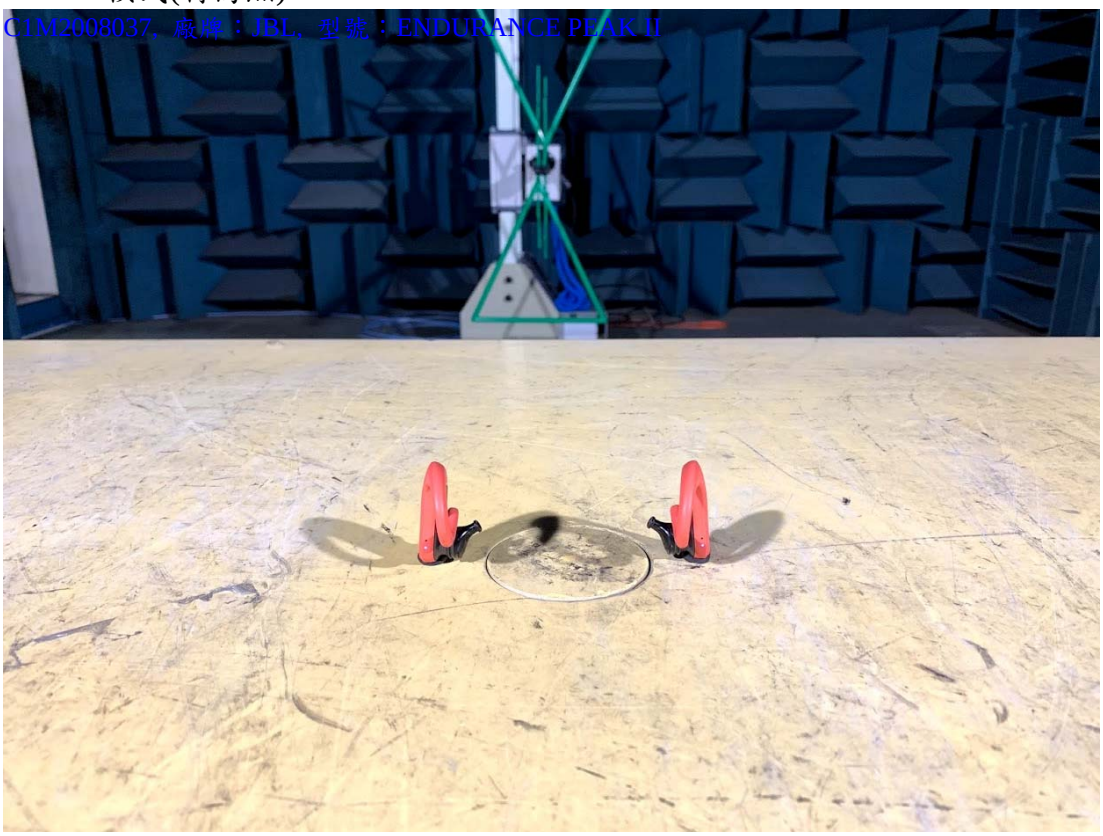

Normal 模式(手機對傳)

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

發射模式-平放

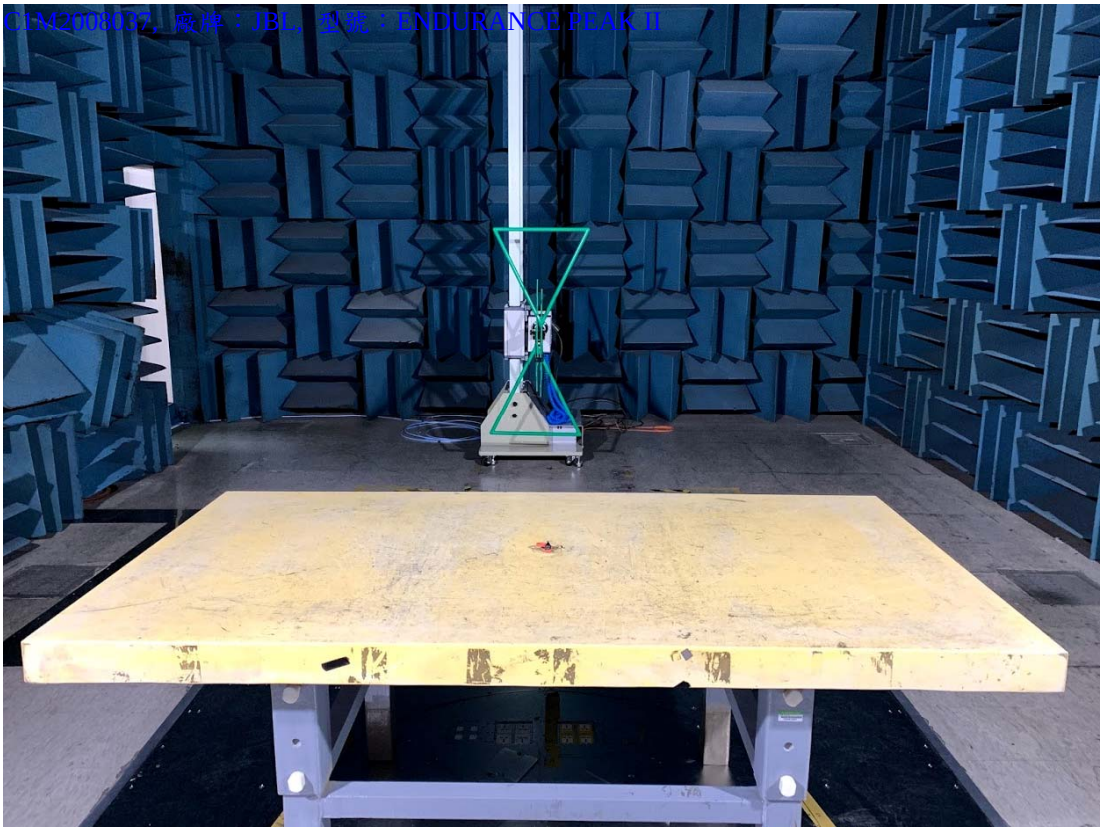

發射模式-平放(特寫照)

發射模式-側立

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

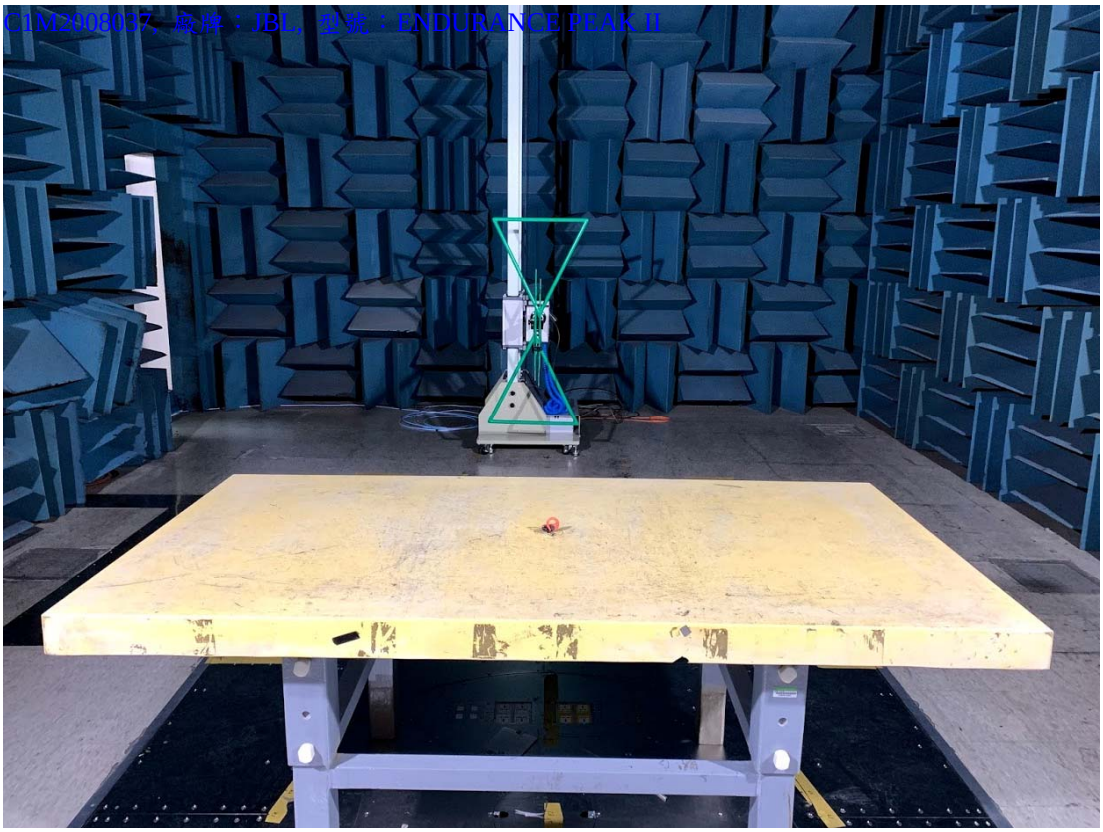

發射模式-側立(特寫照)

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

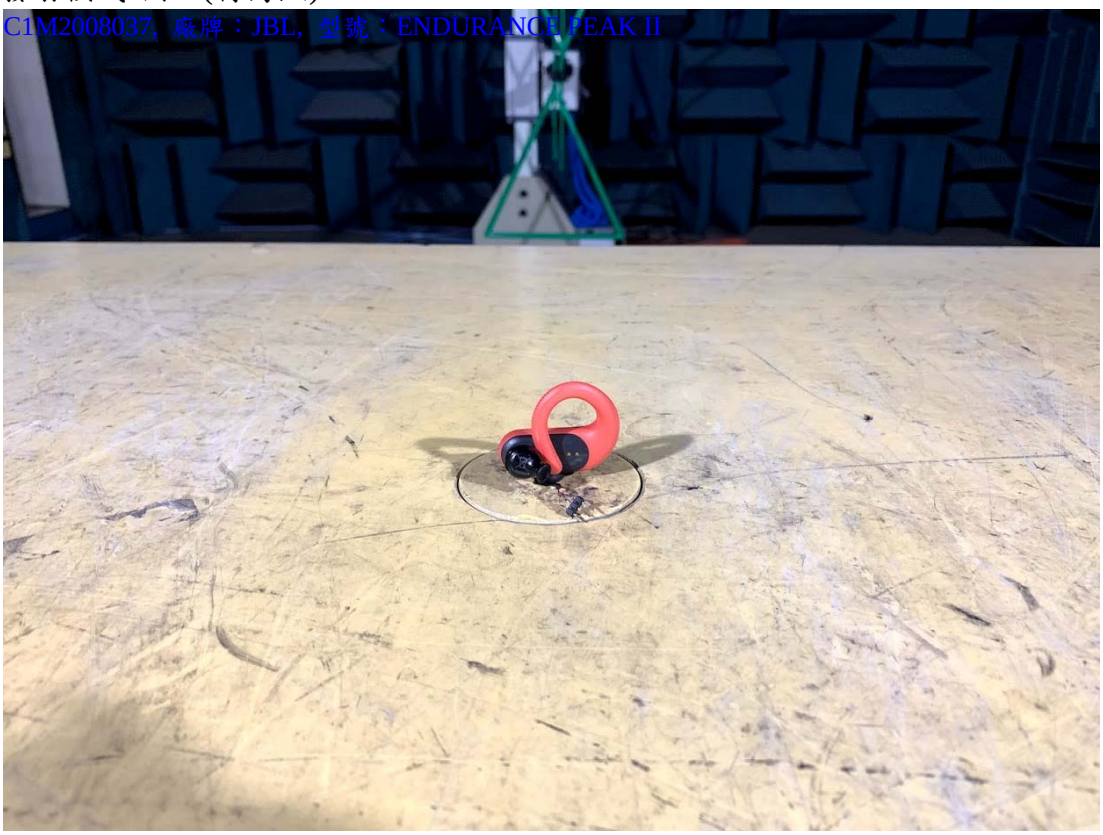

發射模式-站立

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

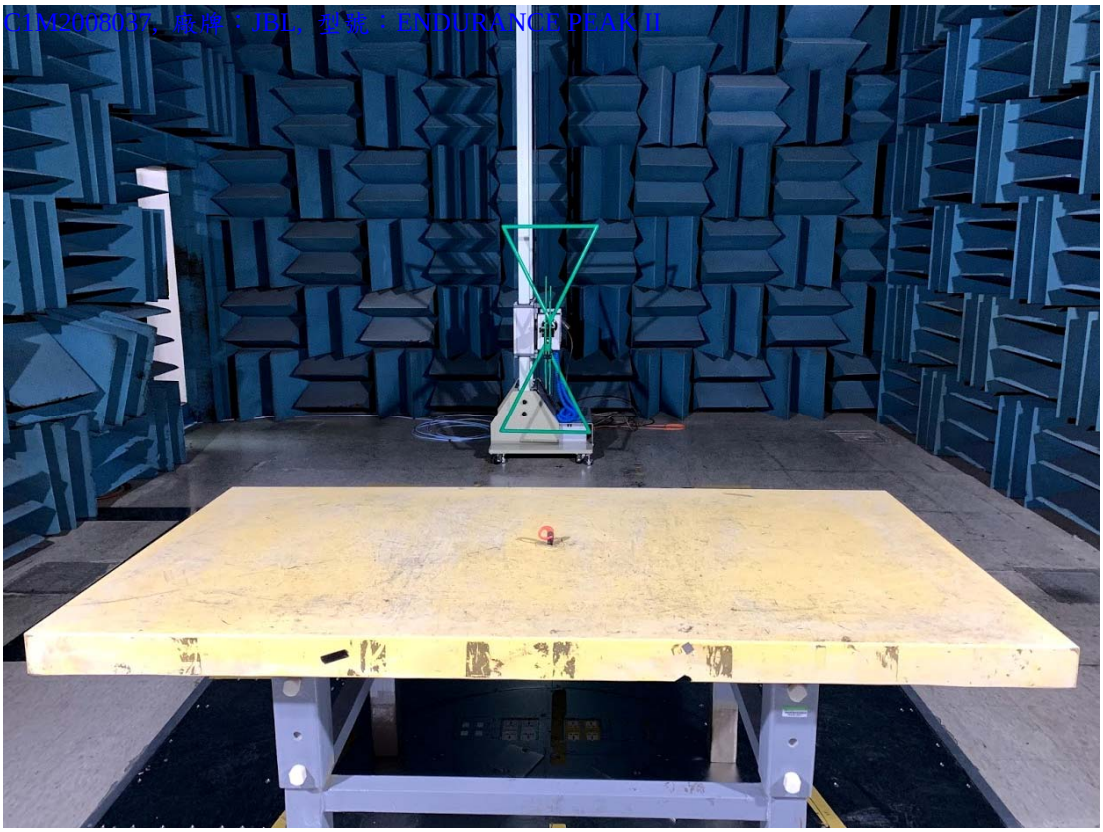

發射模式-站立(特寫照)

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

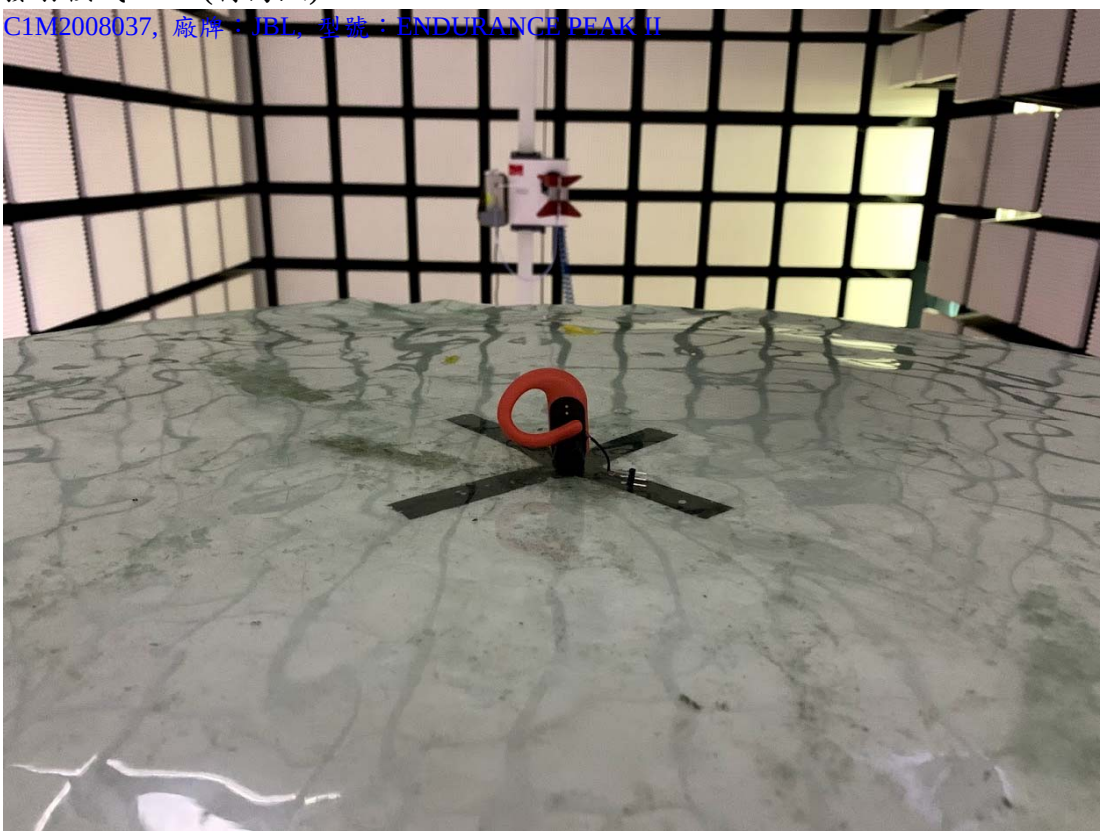

2.2. 量測頻率高於 1GHz 之測試

Normal 模式

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

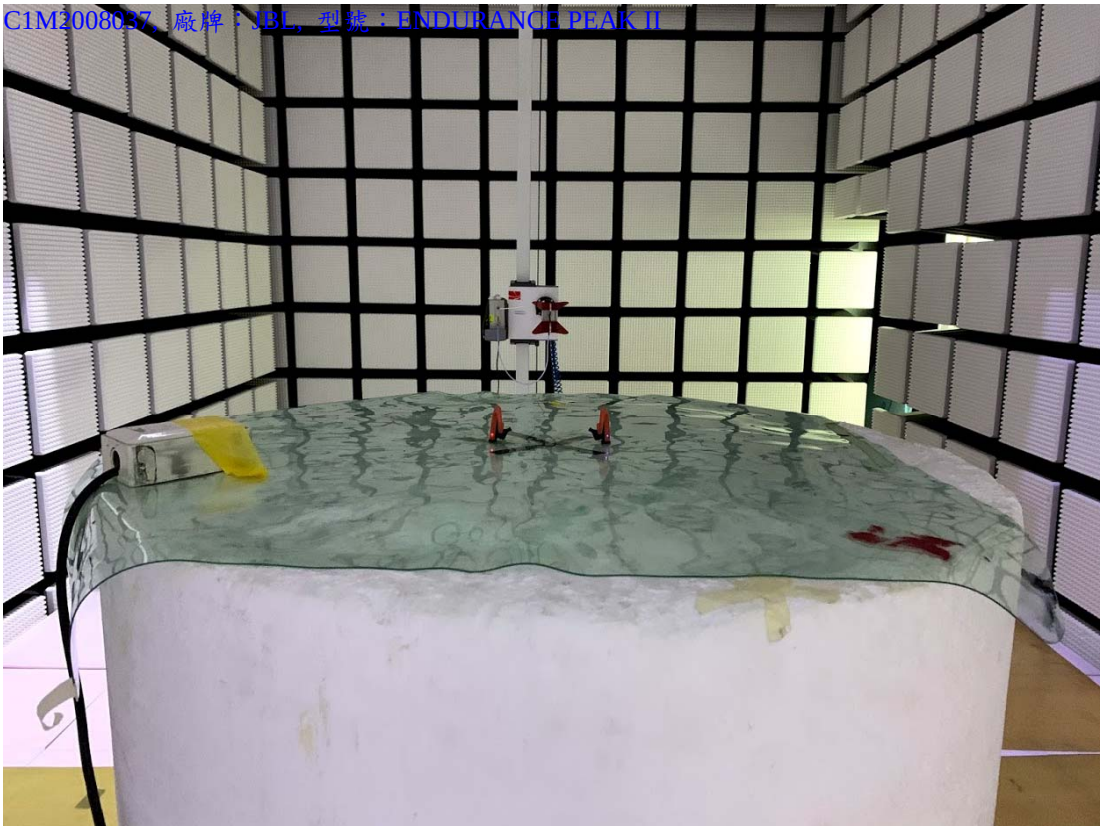

Normal 模式(特寫照)

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

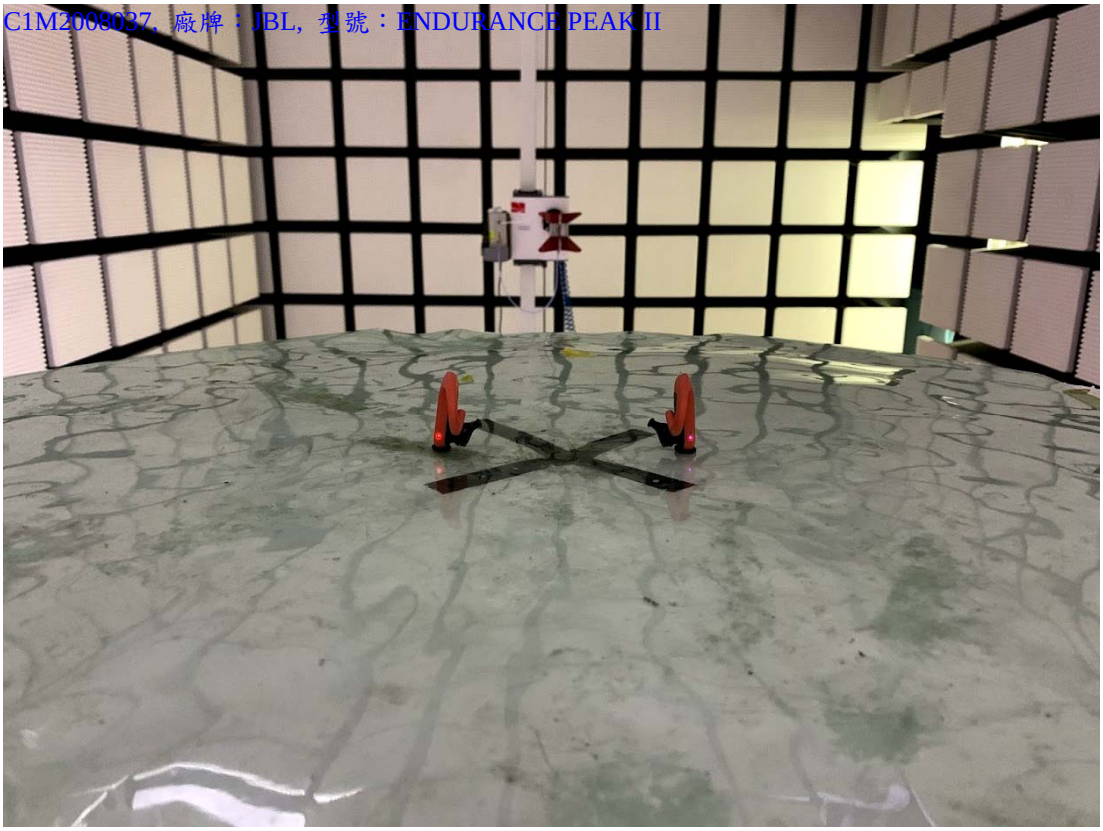

Normal 模式(手機對傳)

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

發射模式-平放

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

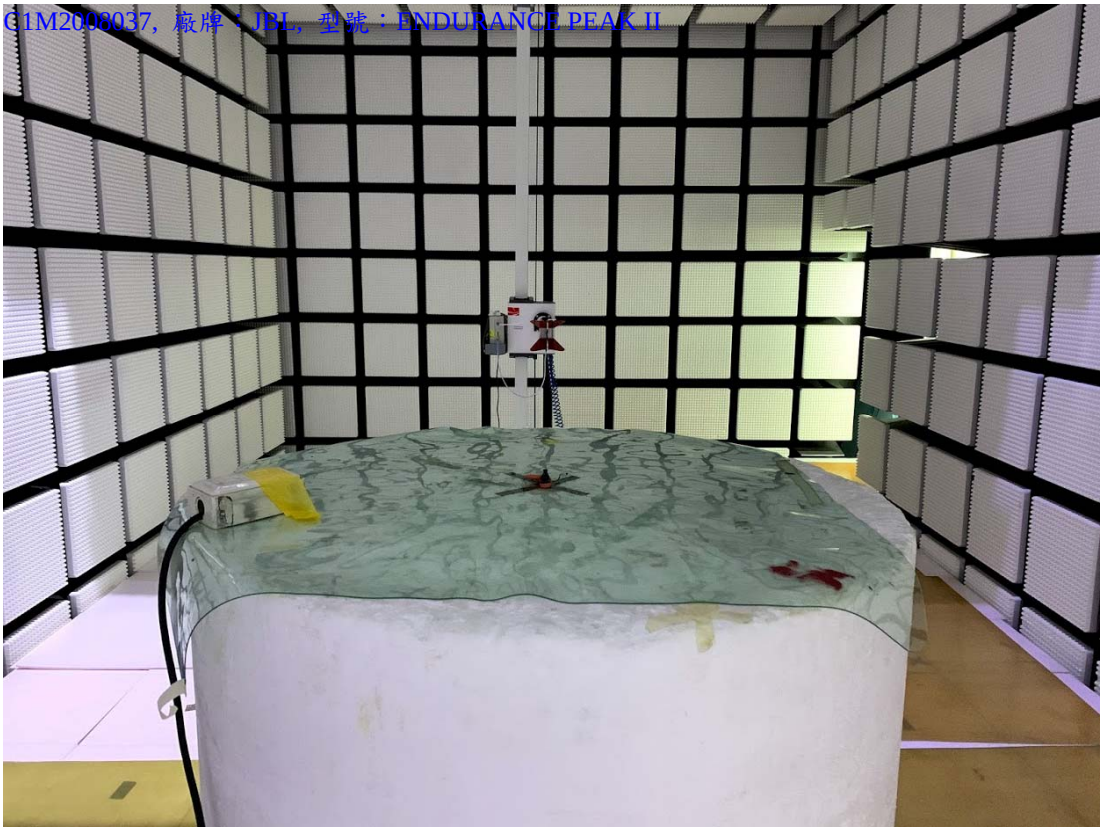

發射模式-平放(特寫照)

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

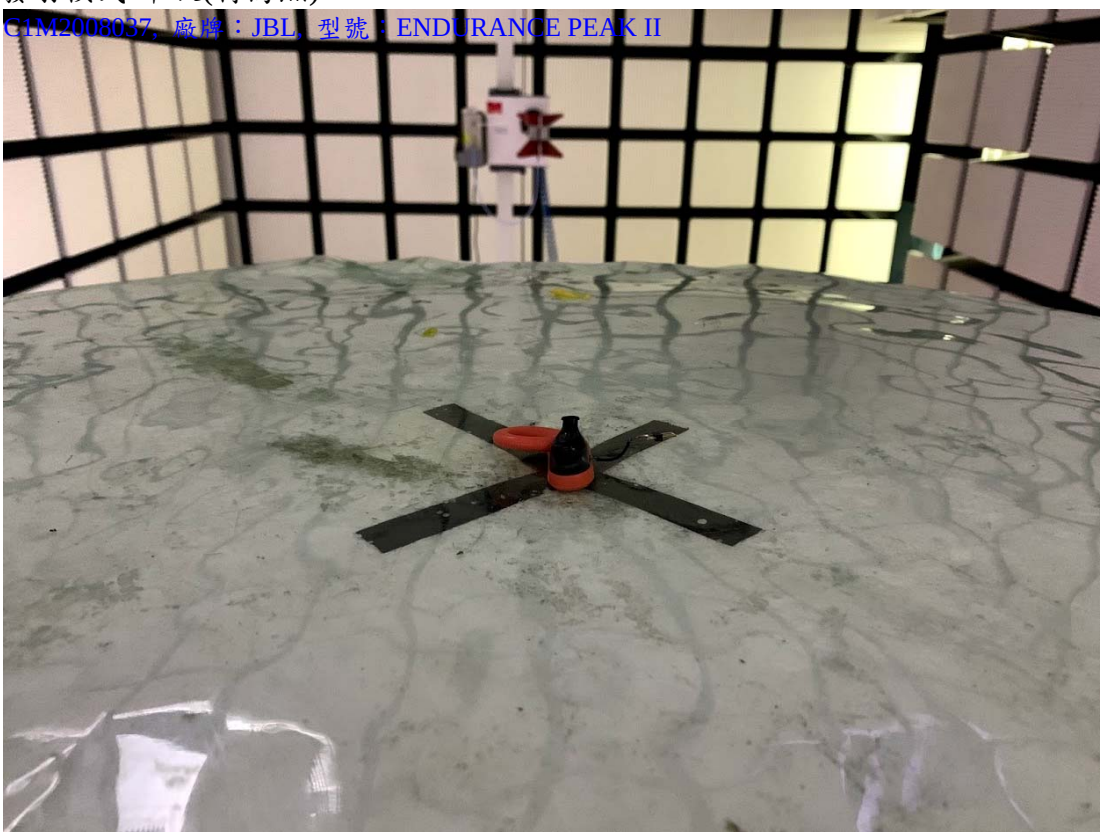

發射模式-側立

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

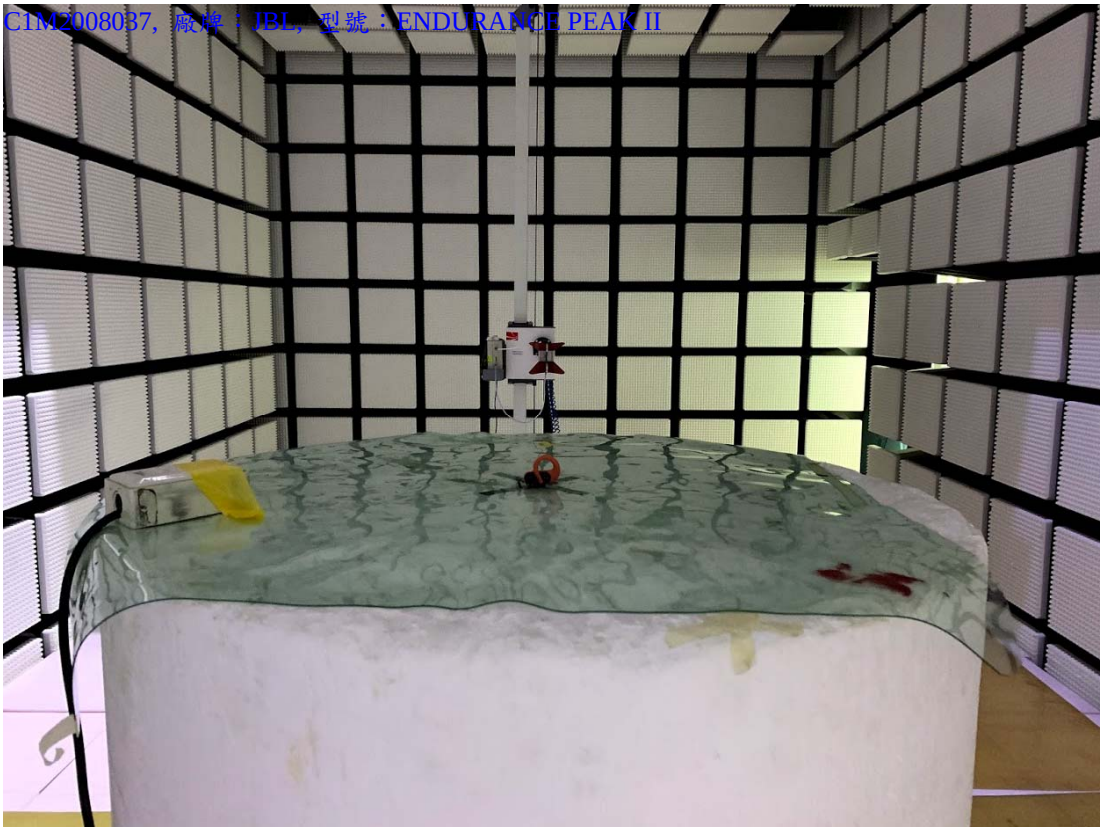

發射模式-側立(特寫照)

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

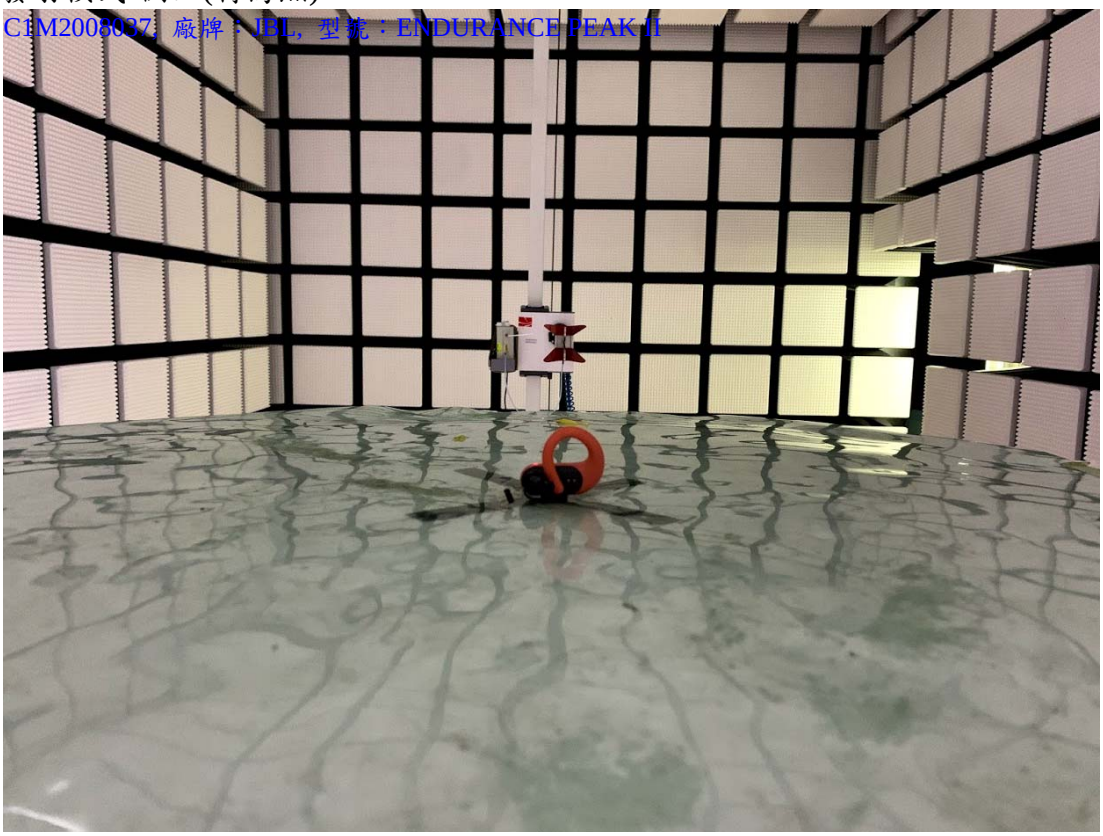

發射模式-站立

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

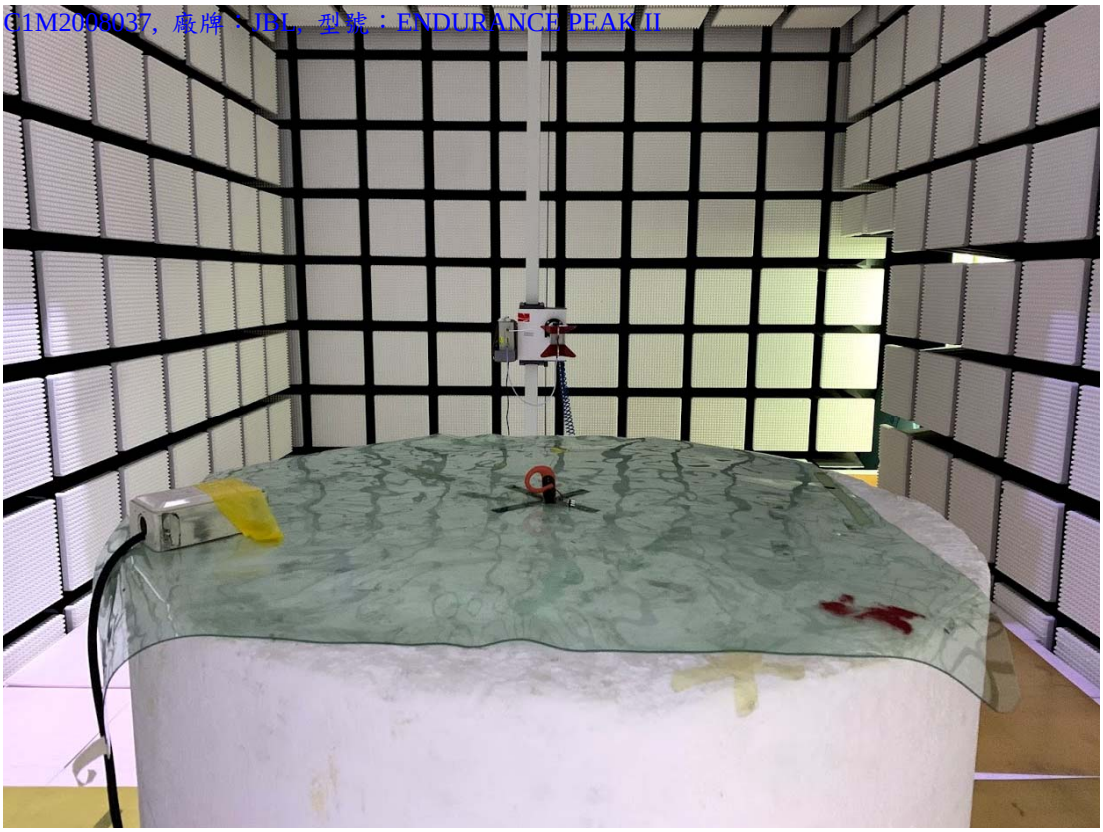

發射模式-站立(特寫照)

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

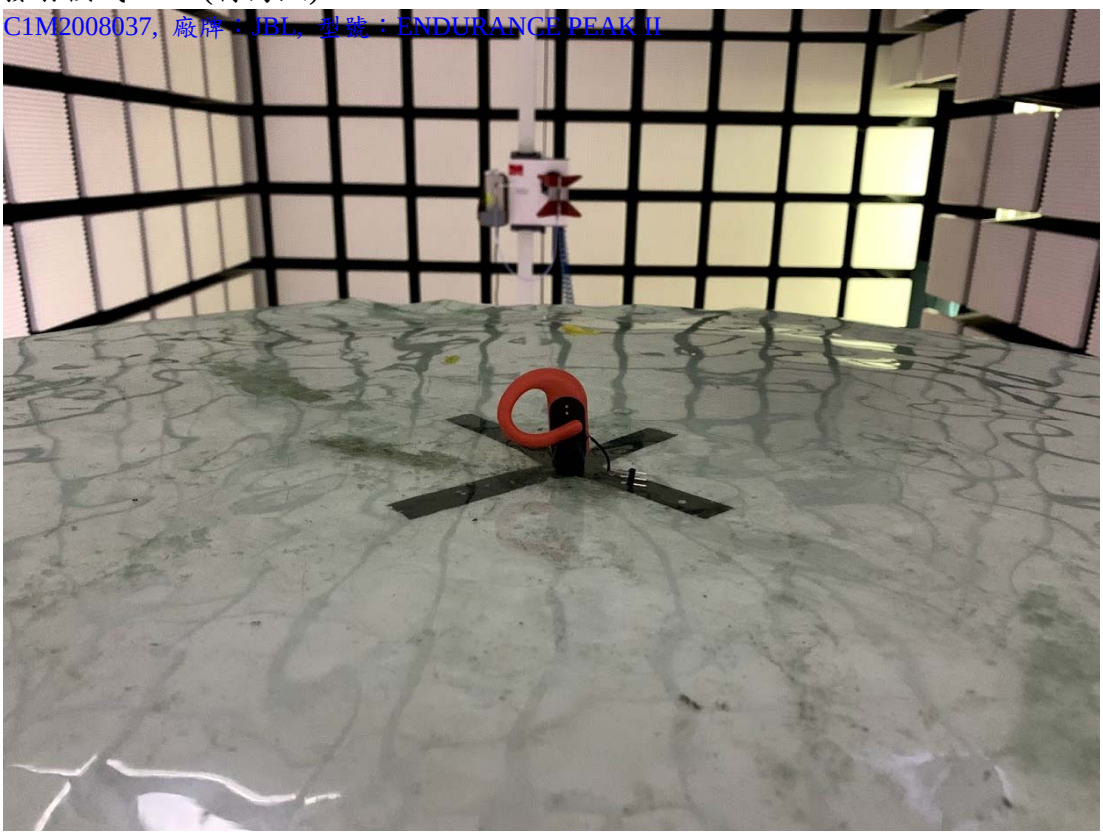

3 RF Conducted 量測

C1M2008037，廠牌：JBL，型號：ENDURANCE PEAK II

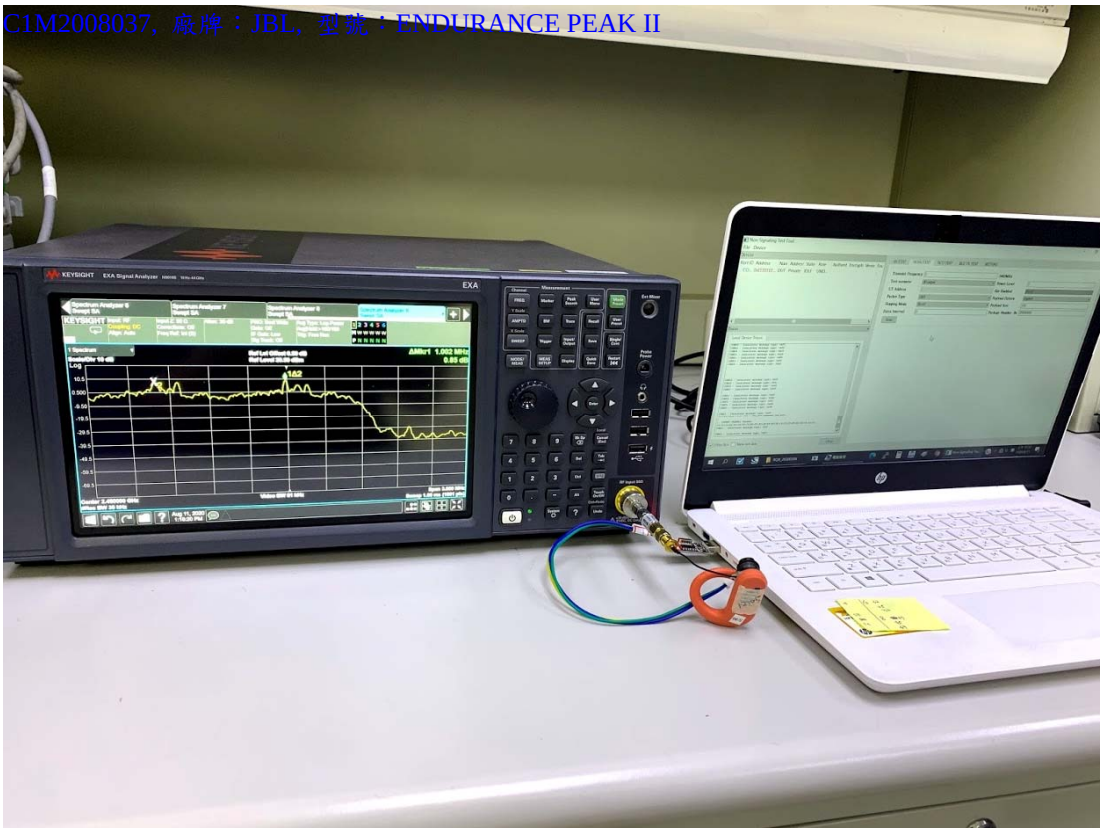

4 測試治具照

正面

C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II

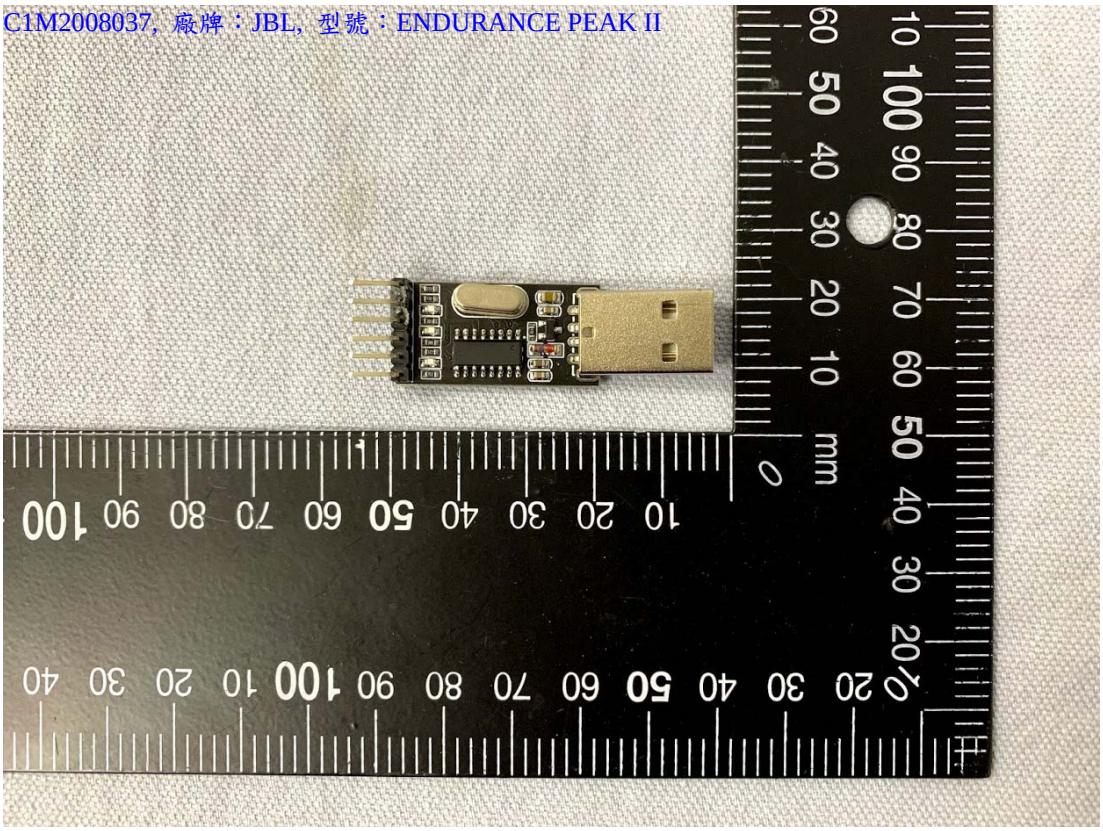

背面
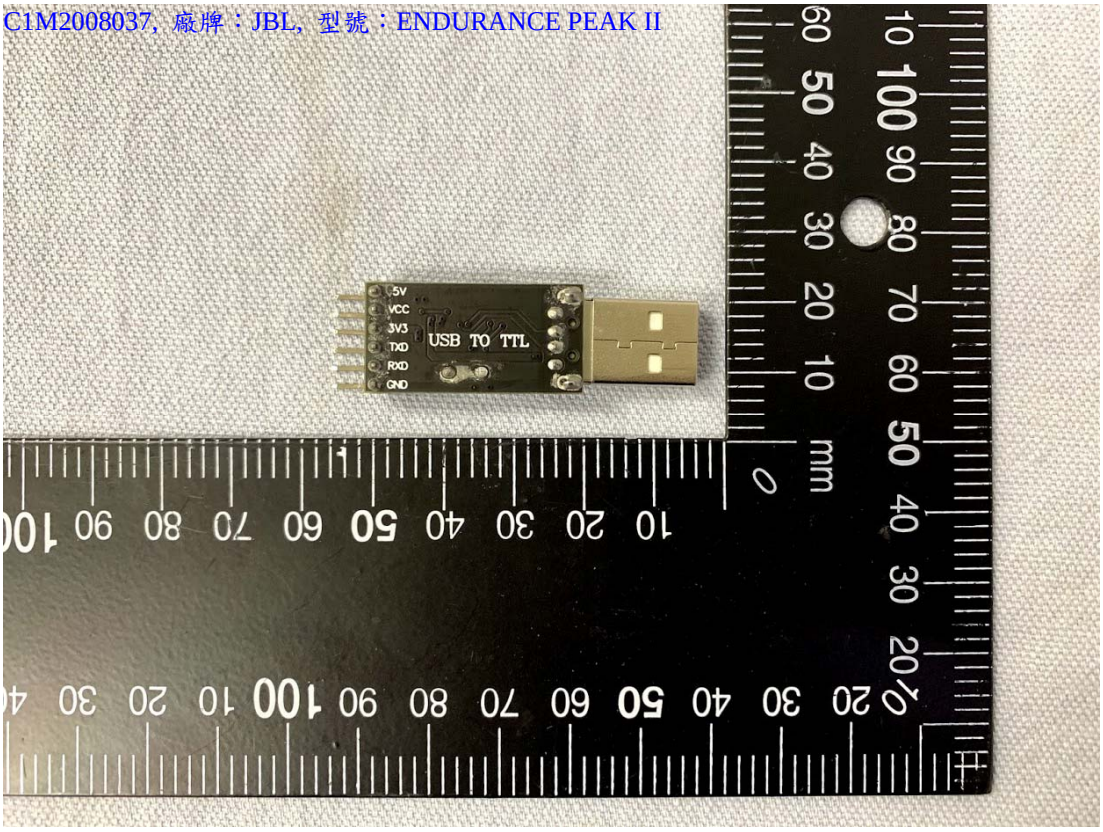
C1M2008037, 廠牌：JBL, 型號：ENDURANCE PEAK II