



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM181000903801
Page: 1 of 86

TEST REPORT

Application No.: SZEM1810009038CR
Applicant: 1 MORE Shen Zhen Acoustic Technology Co., Ltd.
Address of Applicant: Tianliao Building 1403-1411, Zone A Tianliao Industrial Park, Taoyuan Street, Nanshan District, Shenzhen, P.R. China
Manufacturer: 1 MORE Shen Zhen Acoustic Technology Co., Ltd.
Address of Manufacturer: Tianliao Building 1403-1411, Zone A Tianliao Industrial Park, Taoyuan Street, Nanshan District, Shenzhen, P.R. China
Factory: RISUNTEK INC
Address of Factory: Jiuwei Industrial Zone, Qishi Town, 523000, Dongguan City, Guangdong Province, P.R.China
Equipment Under Test (EUT):
EUT Name: 1MORE Stylish True Wireless In-Ear Headphones
Model No.: E1026BT
Trade mark: 1MORE
Standard(s) : MIC Item 19 of Article 2 Paragraph 1
Date of Receipt: 2018-10-18
Date of Test: 2018-10-24
Date of Issue: 2018-10-30

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Kenly Xu
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-10-30		Original

Authorized for issue by:			
			
		Powell Bao /Project Engineer	
			
		Eric Fu /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	MIC Item 19 of Article 2 Paragraph 1	N/A	MIC Item 19 of Article 2 Paragraph 1	Pass
Interference prevention capability	MIC Item 19 of Article 2 Paragraph 1	MIC Notice No.88 Appendix No.43	MIC Item 19 of Article 2 Paragraph 1	Pass
RF accessibility	MIC Item 19 of Article 2 Paragraph 1	N/A	MIC Item 19 of Article 2 Paragraph 1	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Frequency Error	MIC Item 19 of Article 2 Paragraph 1	MIC Notice No.88 Appendix No.43	MIC Item 19 of Article 2 Paragraph 1	Pass
Occupied Bandwidth(99%)	MIC Item 19 of Article 2 Paragraph 1	MIC Notice No.88 Appendix No.43	MIC Item 19 of Article 2 Paragraph 1	Pass
Spread spectrum Bandwidth(90%)	MIC Item 19 of Article 2 Paragraph 1	MIC Notice No.88 Appendix No.43	MIC Item 19 of Article 2 Paragraph 1	Pass
Antenna Power	MIC Item 19 of Article 2 Paragraph 1	MIC Notice No.88 Appendix No.43	MIC Item 19 of Article 2 Paragraph 1	Pass
Dwell time	MIC Item 19 of Article 2 Paragraph 1	MIC Notice No.88 Appendix No.43	MIC Item 19 of Article 2 Paragraph 1	Pass
Spurious emission Intensity	MIC Item 19 of Article 2 Paragraph 1	MIC Notice No.88 Appendix No.43	MIC Item 19 of Article 2 Paragraph 1	Pass
Limit of secondary radiated emissions	MIC Item 19 of Article 2 Paragraph 1	MIC Notice No.88 Appendix No.43	MIC Item 19 of Article 2 Paragraph 1	Pass



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T.	6
4.2 TEST CONDITIONS	6
4.3 DESCRIPTION OF SUPPORT UNITS	6
4.4 MEASUREMENT UNCERTAINTY	7
4.5 TEST LOCATION	8
4.6 TEST FACILITY	8
4.7 DEVIATION FROM STANDARDS	8
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	8
5 EQUIPMENT LIST	9
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	10
6.1 ANTENNA REQUIREMENT	10
6.1.1 Test Requirement:	10
6.1.2 Conclusion	10
6.2 INTERFERENCE PREVENTION CAPABILITY	12
6.2.1 Test Requirement:	12
6.2.2 Test Setup Diagram	12
6.2.3 Conclusion	12
6.3 RF ACCESSIBILITY	13
6.3.1 Test Requirement:	13
6.3.2 Conclusion	13
7 RADIO SPECTRUM MATTER TEST RESULTS	15
7.1 FREQUENCY ERROR	15
7.1.1 E.U.T. Operation	15
7.1.2 Measurement Procedure and Data	15
7.2 OCCUPIED BANDWIDTH(99%)	16
7.2.1 E.U.T. Operation	16
7.2.2 Test Setup Diagram	16
7.2.3 Measurement Procedure and Data	16
7.3 SPREAD SPECTRUM BANDWIDTH(90%)	17
7.3.1 E.U.T. Operation	17
7.3.2 Test Setup Diagram	17
7.3.3 Measurement Procedure and Data	17
7.4 ANTENNA POWER	18
7.4.1 E.U.T. Operation	18
7.4.2 Test Setup Diagram	18
7.4.3 Measurement Procedure and Data	18
7.5 DWELL TIME	19
7.5.1 E.U.T. Operation	19
7.5.2 Test Setup Diagram	19
7.5.3 Measurement Procedure and Data	19

7.6	SPURIOUS EMISSION INTENSITY	20
7.6.1	E.U.T. Operation	21
7.6.2	Test Setup Diagram	21
7.6.3	Measurement Procedure and Data	21
7.7	LIMIT OF SECONDARY RADIATED EMISSIONS	22
7.7.1	E.U.T. Operation	23
7.7.2	Test Setup Diagram	23
7.7.3	Measurement Procedure and Data	23
8	PHOTOGRAPHS	24
8.1	EUT TEST SETUP	24
8.2	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	24
9	APPENDIX	25
9.1	APPENDIX MIC19-2	25-86

4 General Information

4.1 Details of E.U.T.

Power supply:	Powered by ZJ1254C DC 3.7V 55mAh rechargeable battery which is charged via charging base
Cable:	Micro USB cable(Unshielded, 36cm)
Antenna Gain	left -0.5dBi, right 0.7dBi
Antenna Type	Integral Antenna
Channel Spacing	1MHz
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels	79
Operation Frequency	2402MHz to 2480MHz
Spectrum Spread Technology	Frequency Hopping Spread Spectrum(FHSS)

4.2 Test Conditions

Power Supply Powered by DC3.7V rechargeable battery, can be charged by charging base

The RF unit is supplied DC3.3V. The fluctuation of input voltage to the circuit of RF unit of test equipment is under $\pm 1\%$, when input voltage from DC3.7V to the test equipment is fluctuated by $\pm 10\%$, So, all measurement has been conducted by only rated voltage.

The measurement result of the voltage fluctuation at RF circuit when DC3.7V +/- 10%.

DC Input	DC3V30
4.07V	3.33V
3.70V	3.30V
3.33V	3.27V

Temperature: 0 -45.0 °C

Humidity: 45-85 % RH

Atmospheric Pressure: 1000 -1010 mbar

Note:

VN: Normal Voltage

TN: Normal Temperature

TL: Low Extreme Test Temperature

TH: High Extreme Test Temperature

Test

Frequencies: If the EUT can be set to 3 or more different (carrier) frequencies in 1 allocated band, testing shall be performed using the Lowest, Middle and the Highest frequency (L, M and H). If there are 2 or fewer frequencies, testing shall be performed with the available frequencies.

4.3 Description of Support Units

The EUT has been tested as an independent unit.

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 2.84\text{dB}$
6	Conducted Spurious emissions	$\pm 0.75\text{dB}$
7	RF Radiated power	$\pm 4.5\text{dB}$ (below 1GHz)
		$\pm 4.8\text{dB}$ (above 1GHz)
8	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (Below 1GHz)
		$\pm 4.8\text{dB}$ (Above 1GHz)
9	Temperature test	$\pm 1^{\circ}\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

MIC Test Equipment List						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Calibration body	Classification
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2018-09-27	CEPREI	(c)
Spectrum Analyzer (20Hz-43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	CEPREI	(c)
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2018-04-08	CEPREI	(c)
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	CEPREI	(c)
Multi Meter	Fluke	Fluke 73III	SEM022-01	2018-04-08	CEPREI	(c)

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.
- (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992) .
- (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c).

From JRL Article 24-2, paragraph 4, Item 2

Notice: Calibration duration for above equipments is 1 year.

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

MIC Item 19 of Article 2 Paragraph 1

6.1.2 Conclusion


Standard requirement:

Applicable for equipment with an antenna terminal, including testing terminals. If an antenna connector is available, all relevant tests will be carried out conducted. If not, tests will be carried out in an anechoic room or with a suitable test-fixture.


EUT Details:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is left -0.5dBi, right 0.7dBi.

Left:

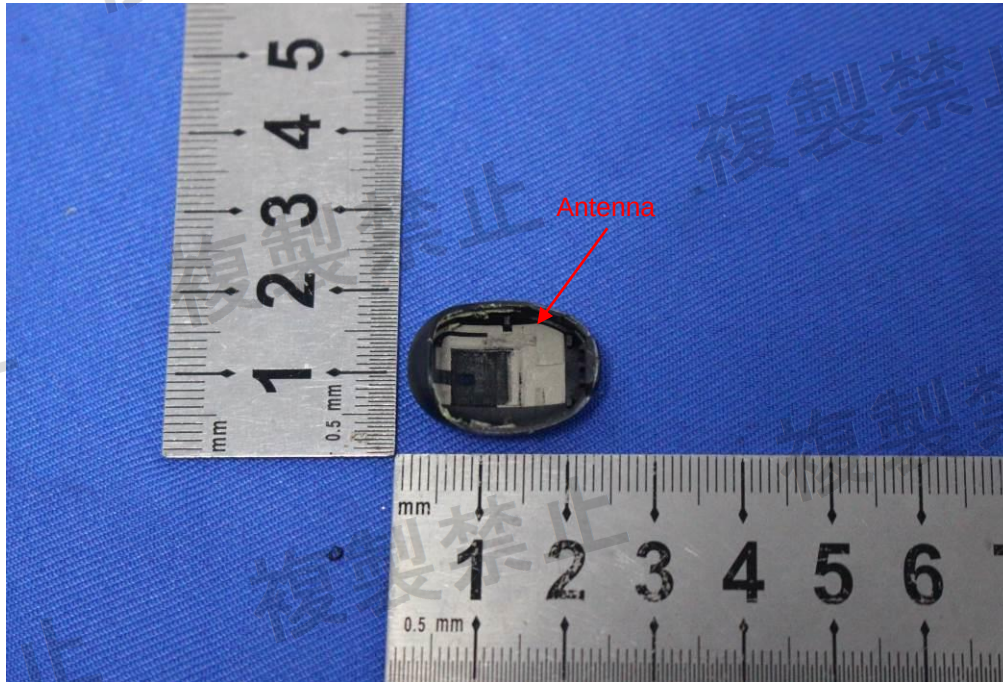

Right

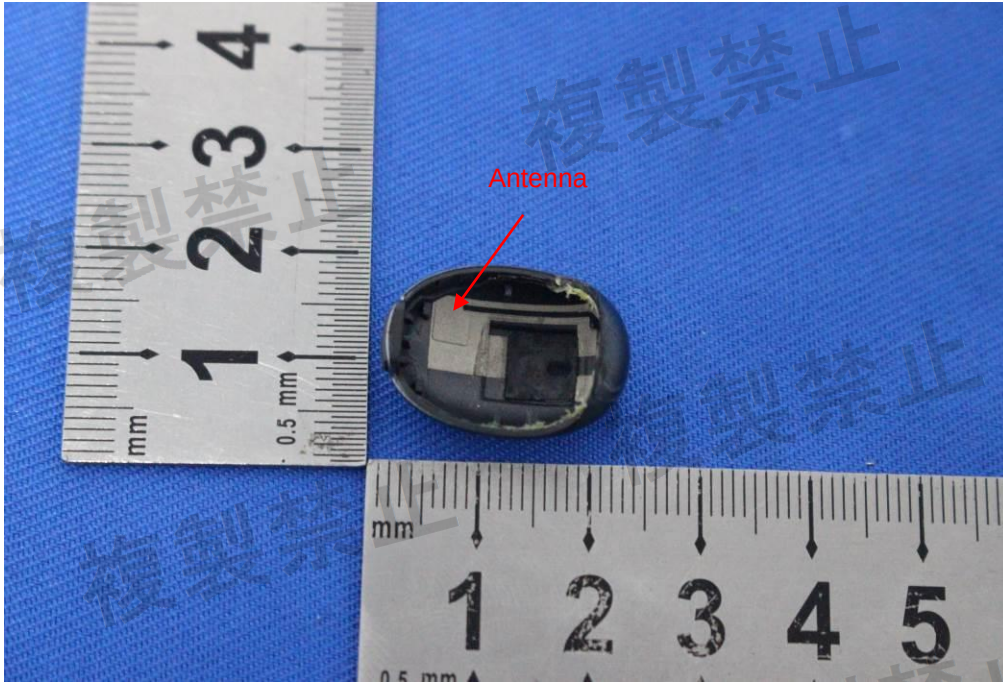

Result:

An antenna connector is available, all relevant tests will be carried out conducted.

6.2 Interference prevention capability

6.2.1 Test Requirement:


MIC Item 19 of Article 2 Paragraph 1

Limit:

Article 2, Item (19) Notice 88 Appendix 43, 44, 45

The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.

6.2.2 Test Setup Diagram



6.2.3 Conclusion

Standard Requirement:

- 1) Measurement system diagram as shown above and test equipment keep transmitting identification code.
- 2) Condition of measuring instrument
 - (1) Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.
- 3) Condition of test equipment The mode of normal use.
- 4) Measuring operation procedure
 - (1) When test equipment has the function to transmit identification code automatically:
 - A) Transmit the predetermined identification code from test equipment.
 - B) Confirm the transmitted identification code by demodulator.



EUT Details:

The unit does meet the requirements (Good).

6.3 RF accessibility

6.3.1 Test Requirement:

MIC Item 19 of Article 2 Paragraph 1


6.3.2 Conclusion

Standard Requirement:

The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.

EUT Details:

Left:

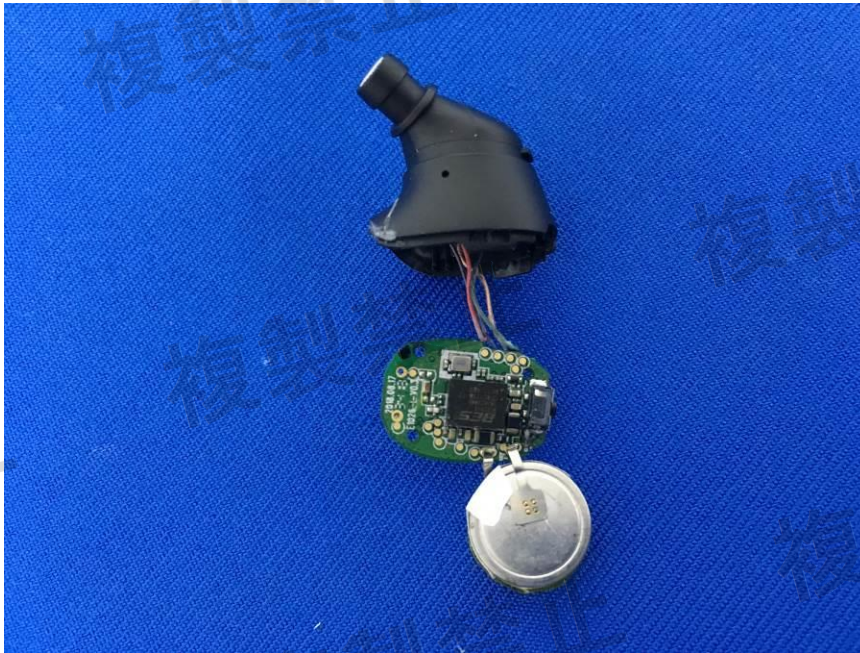

Right



RF and Modulation parts are mounted on PCB with surface mount technology, and there is no any adjustable parts on PCB or adjustable parts are not exposed.

7 Radio Spectrum Matter Test Results

7.1 Frequency Error

Test Requirement MIC Item 19 of Article 2 Paragraph 1
Test Method: MIC Notice No.88 Appendix No.43
Limit: Tolerance of frequency: $\pm 50\text{E-}6$

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C Humidity: 49.8 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:
a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

The worst case for final test:
a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

7.1.2 Measurement Procedure and Data

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping OFF, CW Tx

3. Spectrum Analyzer conditions:

Frequency: Test Frequency

Span 1MHz

RBW 10 kHz (Modulation OFF),

VBW 10 kHz (Modulation OFF),

Sweep Time Auto

Detector mode Positive peak

Indication mode Max hold

Alternative method:

Frequency: Test Frequency

Span 2 times channel bandwidth

RBW 100 kHz (Modulation ON),

VBW 100 kHz (Modulation ON),

Sweep Time Auto

Detector mode Positive peak

Indication mode Max hold

The detailed test data see: Appendix MIC19-2

7.2 Occupied Bandwidth(99%)

Test Requirement	MIC Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
Limit:	FH: 83.5MHz or less FH + DS: 83.5MHz or less FH + OFDM: 83.5MHz or less OFDM: 38MHz or less Others: 26MHz or less

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C Humidity: 49.7 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:

a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

The worst case for final test:

a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

7.2.2 Test Setup Diagram



7.2.3 Measurement Procedure and Data

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON, Modulation Tx

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Frequency: Test Frequency

Span 83.5 MHz (FHSS); 40/60 MHz (OFDM; DSSS); 2-5 times OBW (Others)

RBW 1 MHz (FHSS); 300kHz (OFDM; DSSS); 3% OBW (Others)

VBW 1 MHz (FHSS); 300kHz (OFDM; DSSS); 3 times RBW (Others)

Sweep Time Auto

detector mode Positive peak

Indication mode Max hold

OBW 99%

The detailed test data see: Appendix MIC19-2

7.3 Spread spectrum Bandwidth(90%)

Test Requirement	MIC Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
Limit:	DS,FH,FH+DS,FH+OFDM: 500kHz or more

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C Humidity: 49.7 % RH Atmospheric Pressure: 1010 mbar


Pretest these modes to find the worst case:

a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

The worst case for final test:

a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

7.3.2 Test Setup Diagram



7.3.3 Measurement Procedure and Data

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON, Modulation Tx

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Frequency: Test Frequency

Span 83.5 MHz (FHSS); 40/60 MHz (OFDM; DSSS)

RBW 1 MHz (FHSS); 300kHz (OFDM; DSSS)

VBW 1 MHz (FHSS); 300kHz (OFDM; DSSS)

Sweep Time Auto

detector mode Positive peak

Indication mode Max hold

OBW 90%

The detailed test data see: Appendix MIC19-2

7.4 Antenna Power

Test Requirement

Test Method:

Limit:

MIC Item 19 of Article 2 Paragraph 1

MIC Notice No.88 Appendix No.43

Designated value

- (1) FH, FH+DS, FH+OFDM: 3mW/MHz
(used in the range of 2427 - 2470.75 MHz)
 - (2) OFDM, DS other than (1) 10mW/MHz
 - (3) Other than (1) & (2) 10mW
 - (4) OFDM OBW 26 - 38MHz: 5mW/MHz
- Tolerance: +20%, -80%

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C Humidity: 49.7 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:

- a: TX(left)_Keep the EUT in transmitting mode
- d: TX(right)_Keep the EUT in transmitting mode

The worst case for final test:

- a: TX(left)_Keep the EUT in transmitting mode
- d: TX(right)_Keep the EUT in transmitting mode

7.4.2 Test Setup Diagram



7.4.3 Measurement Procedure and Data

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON, Modulation Tx

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Frequency: Test Frequency

Span 25 MHz(FHSS); 40/60 MHz (OFDM; DSSS); Enough to capture the emission (Others)

RBW 1 MHz (FHSS; OFDM; DSSS); More than OBW (Others)

VBW 1 MHz (FHSS; OFDM; DSSS); More than RBW (Others)

Sweep Time Auto

detector mode RMS

Indication mode Max hold

The detailed test data see: Appendix MIC19-2

7.5 Dwell time

Test Requirement MIC Item 19 of Article 2 Paragraph 1
Test Method: MIC Notice No.88 Appendix No.43
Limit: less than 0.4sec

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 22.8 °C Humidity: 49.7 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:
a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

The worst case for final test:
a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

7.5.2 Test Setup Diagram



7.5.3 Measurement Procedure and Data

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON, Hopping frequency is fixed, Bluetooth equipment is setting DH5 mode

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Frequency: Test Frequency (fixed hopping frequency)

Span 0 Hz

RBW 1 MHz

VBW 1 MHz

Sweep Time EUT condition

Trigger Video Trigger

Measures the Transmission time of 1 burst (sec)

Measures the Burst cycle (sec)

4. Calculation procedure:

Dwell time = (0.4(s) x [spreading rate] x [Transmission time of 1 burst(s)]) / ([burst cycle(s)] x [No. of hopping channel])

Note:

* Spreading rate = [Spread bandwidth (actual measurement value)] / [Transmission rate]

The detailed test data see: Appendix MIC19-2

7.6 Spurious emission Intensity

Test Requirement	MIC Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
Limit:	(1) Below 2387 MHz: 2.5μW/MHz (2) 2387 to 2400 MHz: 25μW/MHz (3) 2483.5 through 2496.5 MHz: 25μW/MHz (4) Over 2496.5 MHz: 2.5μW/MHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C Humidity: 49.7 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:
a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

The worst case for final test:
a:TX(left)_Keep the EUT in transmitting mode
d: TX(right)_Keep the EUT in transmitting mode

7.6.2 Test Setup Diagram



7.6.3 Measurement Procedure and Data

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON, , Modulation Tx

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Step 1

All spurious are measured from 30 MHz to 13 GHz by peak mode.

Step 2

IF the value measured by Step1 is 2 dB or less, measure in average mode.

Test setup for Step 1:

Frequency: 30 MHz – 2400 MHz , 2483.5 MHz –13 GHz

RBW 1 MHz

VBW 1 MHz

Sweep Time Auto

detector mode Positive peak

Indication mode Max hold

Test setup for Step 2:

Frequency: Spurious Frequency

RBW 1 MHz

VBW 1 MHz

Sweep Time Auto

detector mode Sample

Indication mode Max hold

The detailed test data see: Appendix MIC19-2

7.7 Limit of secondary radiated emissions

Test Requirement	MIC Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
Limit:	(1) Below 1 GHz : 4 nW or less (2) 1 GHz and over : 20 nW or less

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C Humidity: 49.7 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:
b:RX(left)_Keep the EUT in receiving mode
e: RX(right)_Keep the EUT in receiving mode

The worst case for final test:
b:RX(left)_Keep the EUT in receiving mode
e: RX(right)_Keep the EUT in receiving mode

7.7.2 Test Setup Diagram



7.7.3 Measurement Procedure and Data

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Step 1

All spurious are measured from 30 MHz to 13 GHz by peak mode.

Step 2

IF the value measured by Step1 is 2 dB or less, measure in average mode.

Test setup for Step 1:

Frequency: 30 MHz – 2400 MHz , 2483.5 MHz –13 GHz

RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz)

VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz)

Sweep Time Auto

detector mode Positive peak

Indication mode Max hold

Test setup for Step 2:

Frequency: Spurious Frequency

Span 0 Hz

RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz)

VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz)

Sweep Time Auto

detector mode Sample


Indication mode Max hold

The detailed test data see: Appendix MIC19-2


8 Photographs

8.1 EUT Test Setup

Left

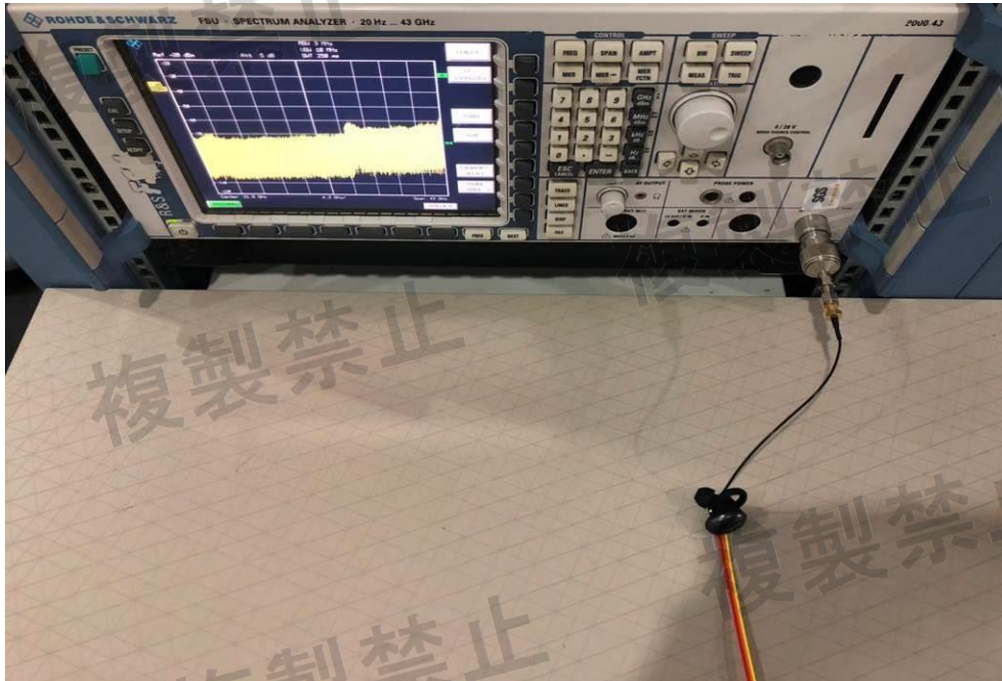

Right

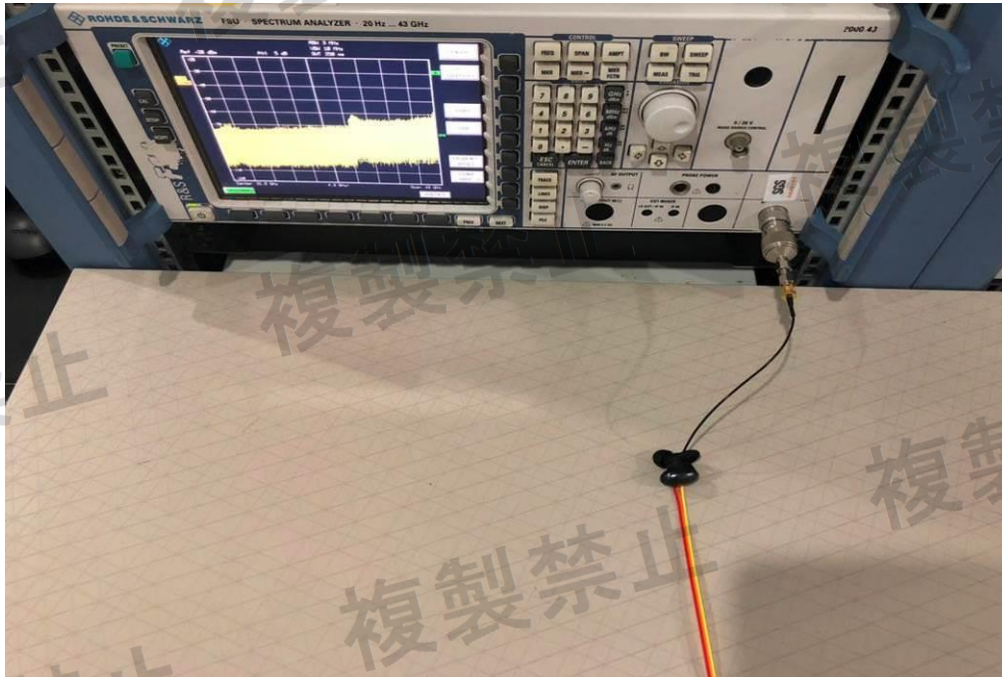

8.2 EUT Constructional Details (EUT Photos)

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1810009038CR.

9 Appendix


9.1 Appendix MIC19-2

Left

1.Frequency Error


Test Condition	Test Mode	Test Channel	Ant	Result[MHz]	Result[PPM]	Limit[PPM]	Verdict
TNVN	DH5	2402	Ant1	2401.996	-1.67	$\leq \pm 50$	PASS
TNVN	DH5	2441	Ant1	2440.996	-1.64	$\leq \pm 50$	PASS
TNVN	DH5	2480	Ant1	2479.995	-2.02	$\leq \pm 50$	PASS

Frequency Error_TNVN_DH5_2402_Ant1

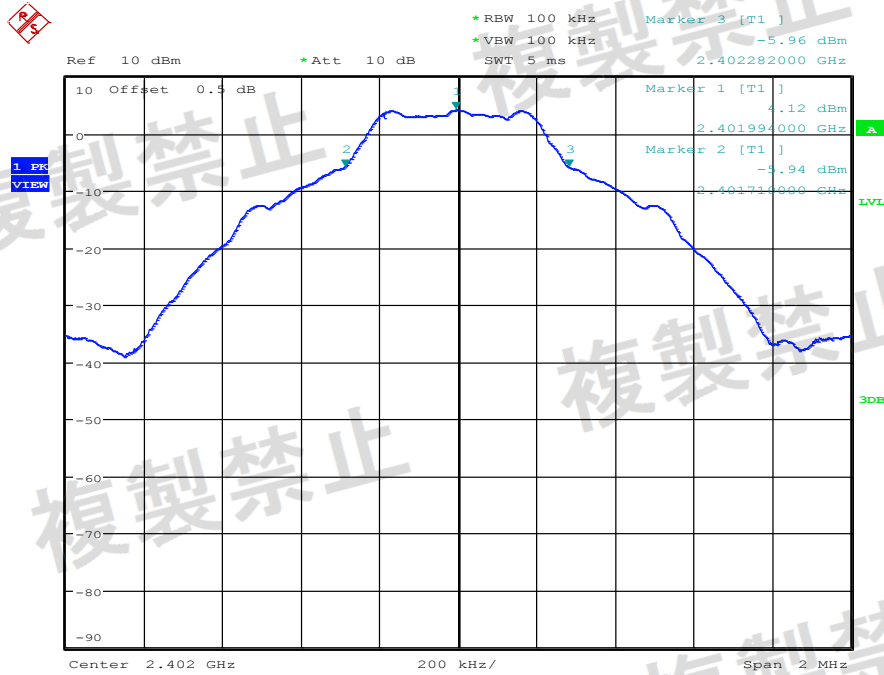


Date: 23.OCT.2018 17:25:32

Frequency Error_TNVN_DH5_2441_Ant1

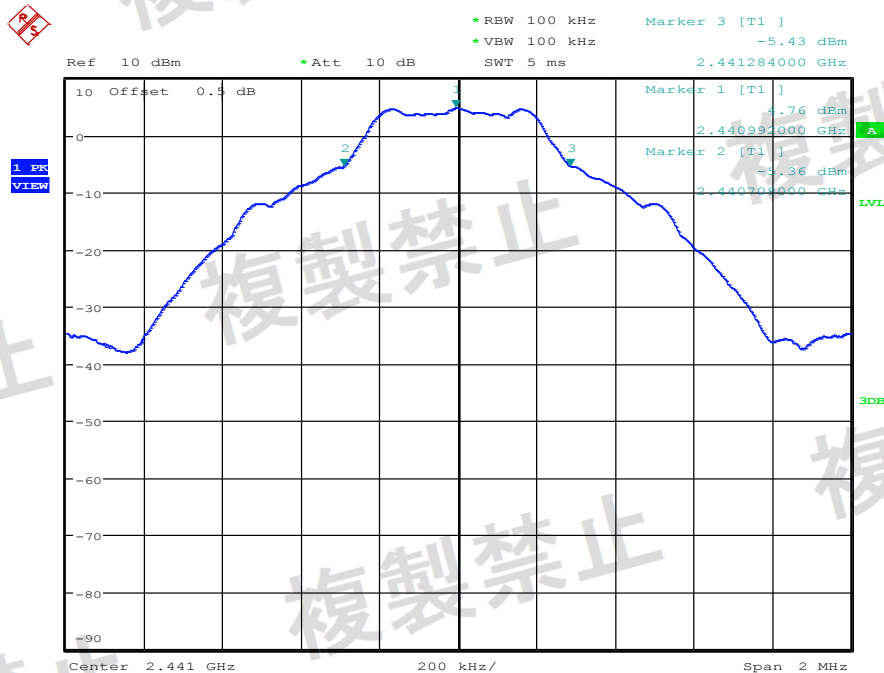


Date: 23.OCT.2018 17:26:56

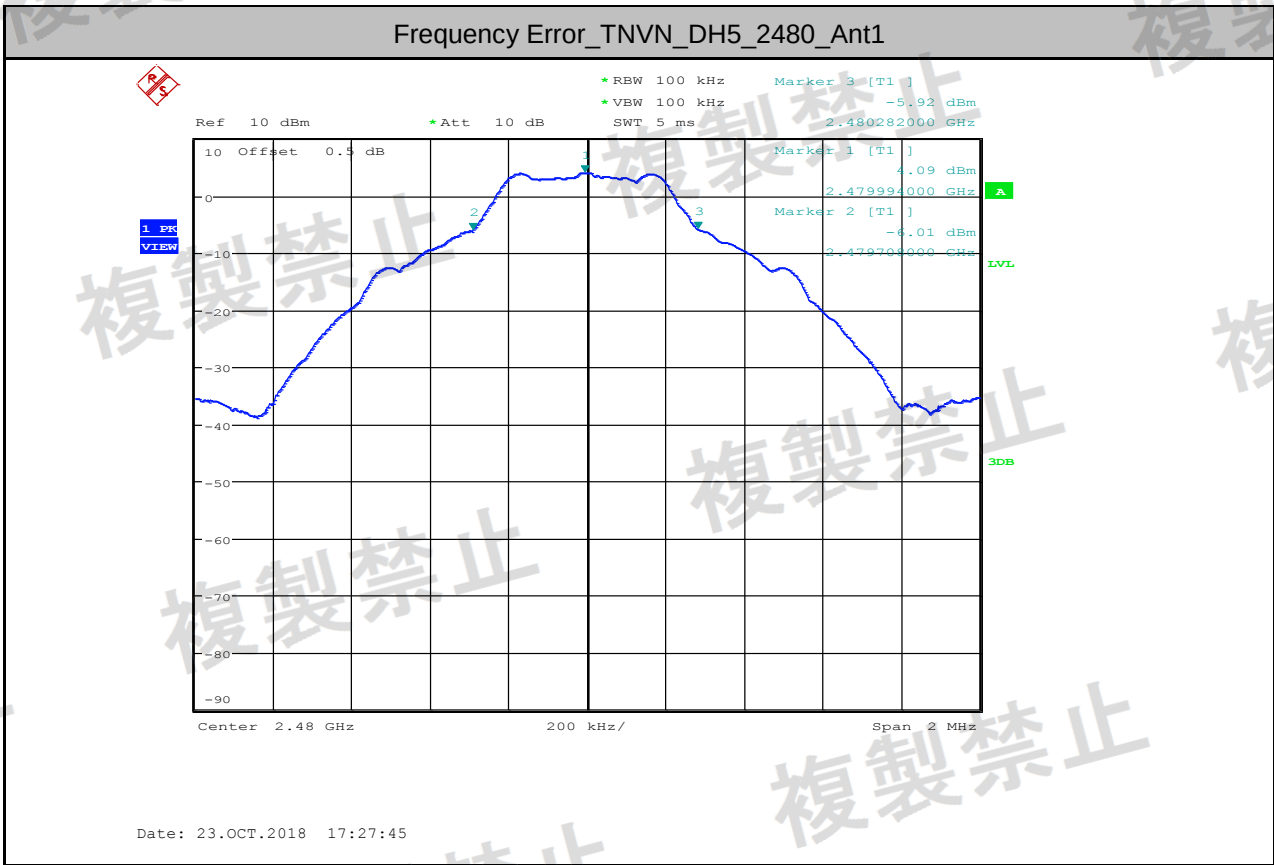

2.Occupied Bandwidth (99%)


Test Condition	Test Mode	Test Channel	Ant	Test Result[MHz]	Limit [MHz]	Verdict
TNVN	DH5	2441	Ant1	78.817	<=83.5	PASS
TNVN	2DH5	2441	Ant1	78.817	<=83.5	PASS
TNVN	3DH5	2441	Ant1	78.817	<=83.5	PASS

Occupied Bandwidth_TNVN_DH5_2441_Ant1

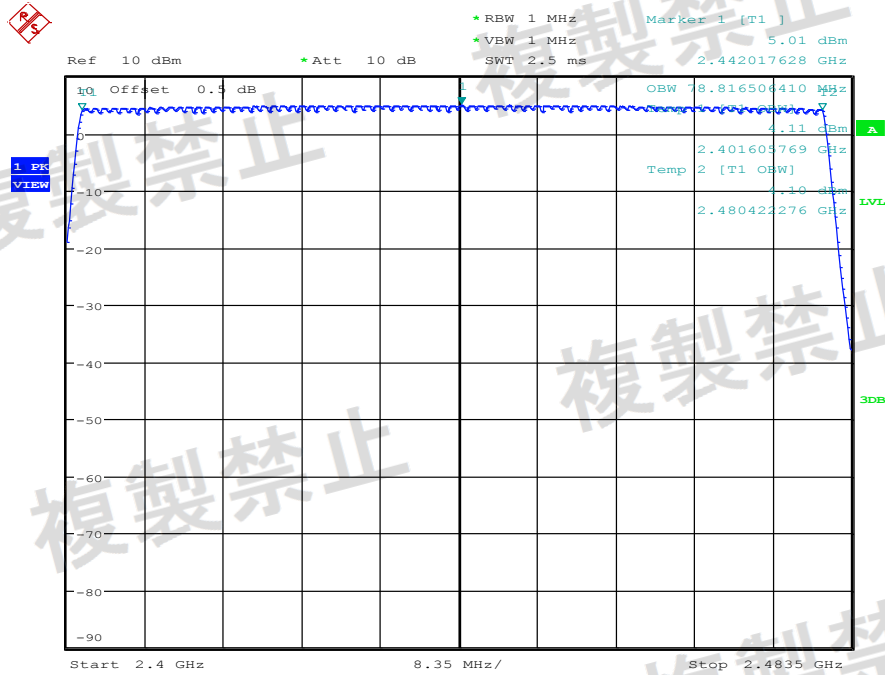


Date: 23.OCT.2018 16:43:55

Occupied Bandwidth_TNVN_2DH5_2441_Ant1

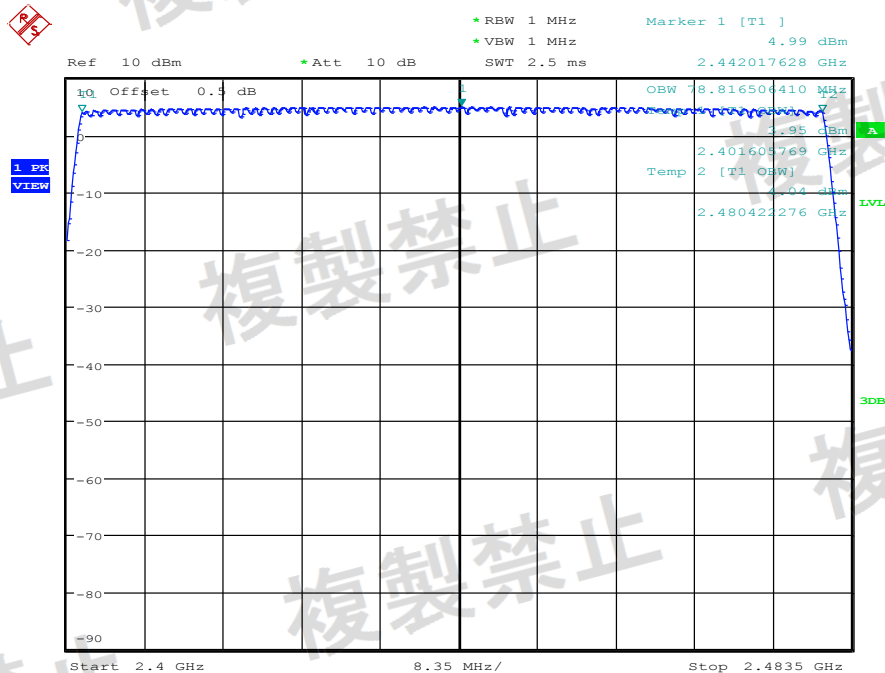

Date: 23.OCT.2018 16:49:10


Occupied Bandwidth_TNVN_3DH5_2441_Ant1

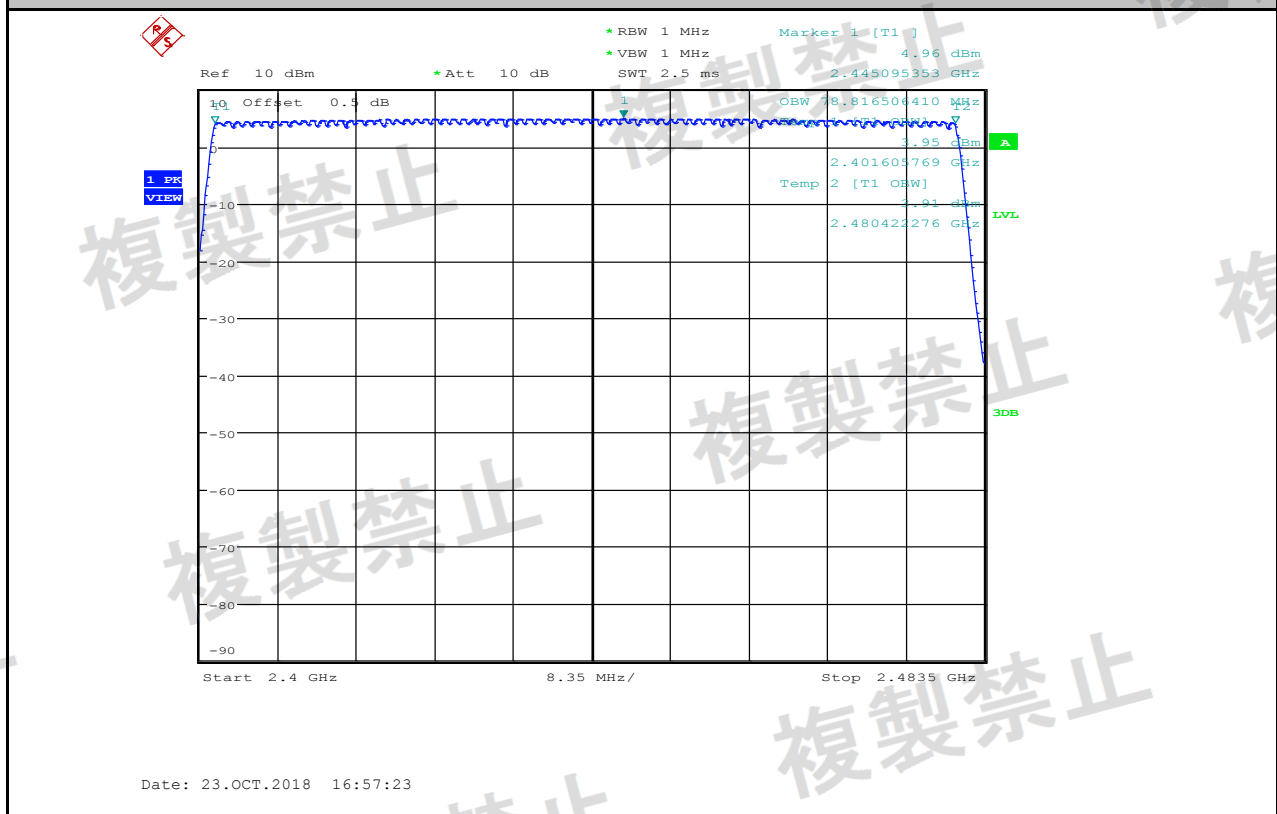

3.Spread spectrum Bandwidth (90%)


Test Condition	Test Mode	Test Channel	Ant	Test Result[MHz]	Limit [MHz]	Verdict
TNVN	DH5	2441	Ant1	71.055	>=0.5	PASS
TNVN	2DH5	2441	Ant1	70.921	>=0.5	PASS
TNVN	3DH5	2441	Ant1	71.055	>=0.5	PASS

Spread spectrum Bandwidth_TNVN_DH5_2441_Ant1

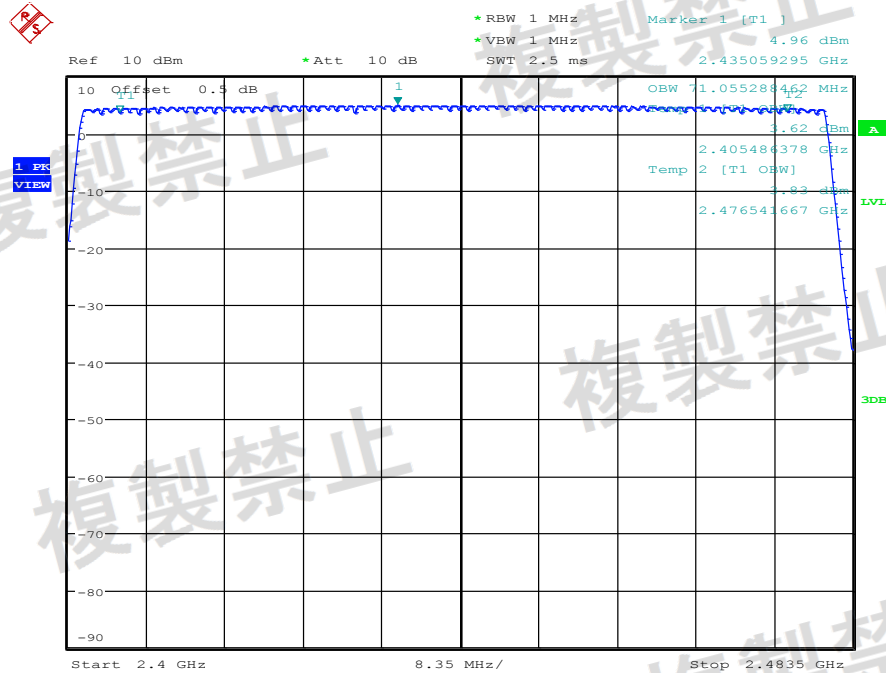


Date: 23.OCT.2018 16:44:30

Spread spectrum Bandwidth_TNVN_2DH5_2441_Ant1

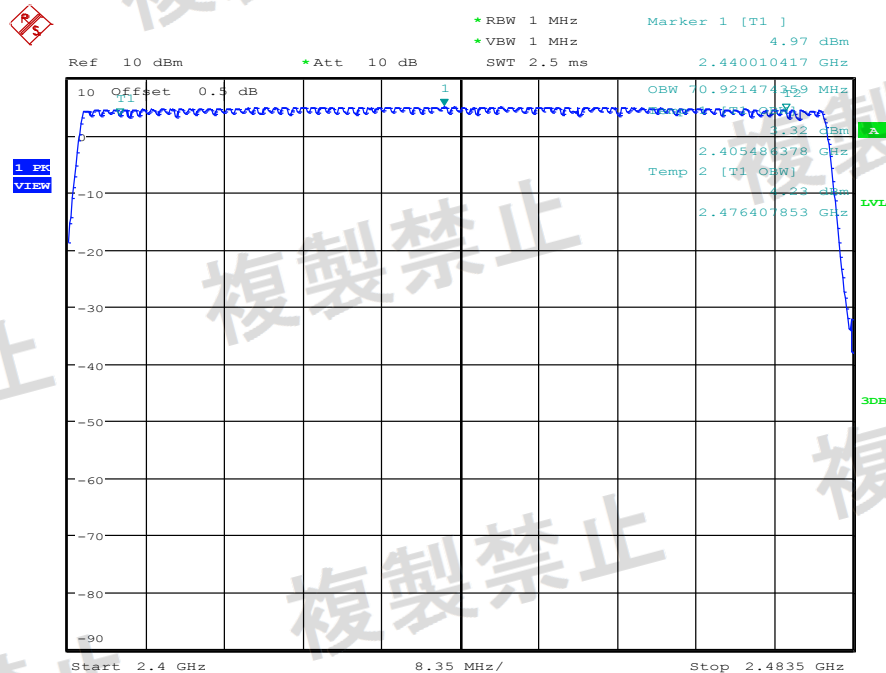

Date: 23.OCT.2018 16:53:01


Spread spectrum Bandwidth_TNVN_3DH5_2441_Ant1

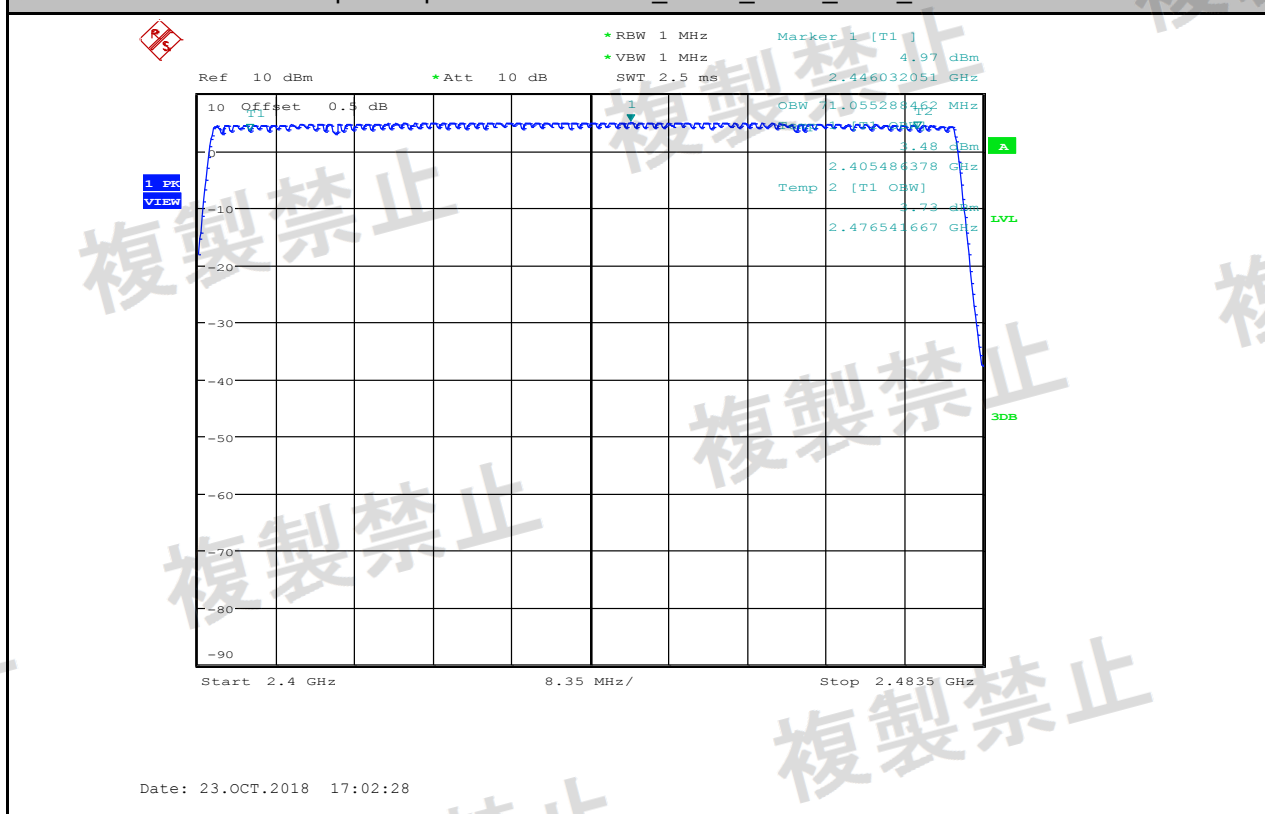

4. Antenna Power


Test Condition	Test Mode	Test Channel	Ant	Power [mW/MHz]	Limit [mW/MHz]	Normal Power [mW/MHz]	Tolerance[%]	Limit [%]	Verdict
TNVN	DH5	2402	Ant1	2.4	3	3	-20.000	-80 to +20	PASS
TNVN	DH5	2441	Ant1	2.8	3	3	-6.667	-80 to +20	PASS
TNVN	DH5	2480	Ant1	2.36	3	3	-21.333	-80 to +20	PASS
TNVN	2DH5	2402	Ant1	1.03	3	1.5	-31.333	-80 to +20	PASS
TNVN	2DH5	2441	Ant1	1.23	3	1.5	-18.000	-80 to +20	PASS
TNVN	2DH5	2480	Ant1	1.04	3	1.5	-30.667	-80 to +20	PASS
TNVN	3DH5	2402	Ant1	1.06	3	1.5	-29.333	-80 to +20	PASS
TNVN	3DH5	2441	Ant1	1.19	3	1.5	-20.667	-80 to +20	PASS
TNVN	3DH5	2480	Ant1	1.05	3	1.5	-30.000	-80 to +20	PASS

Antenna Power_TNVN_DH5_2402_Ant1

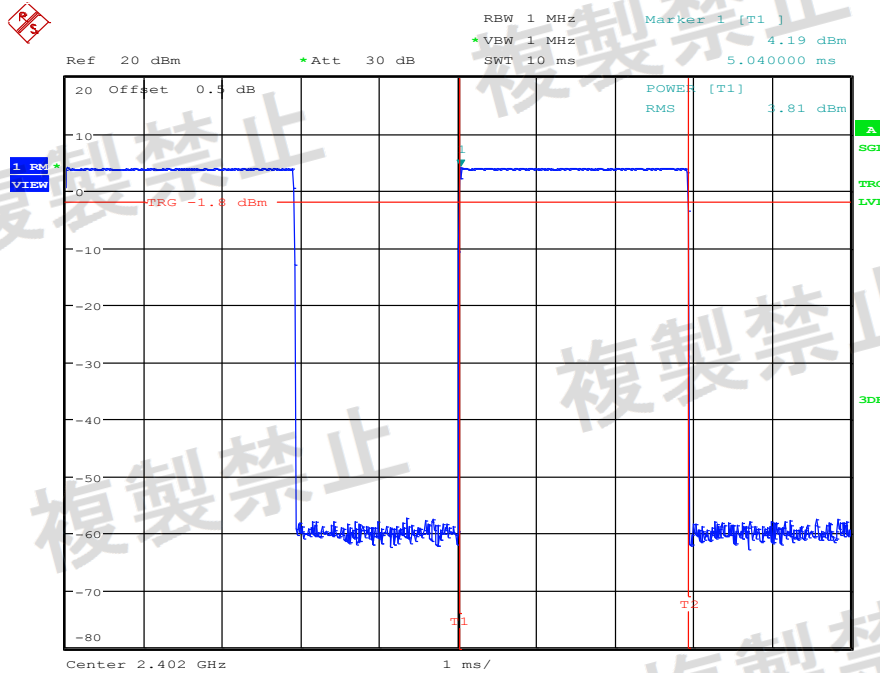


Date: 23.OCT.2018 17:04:58

Antenna Power_TNVN_DH5_2441_Ant1

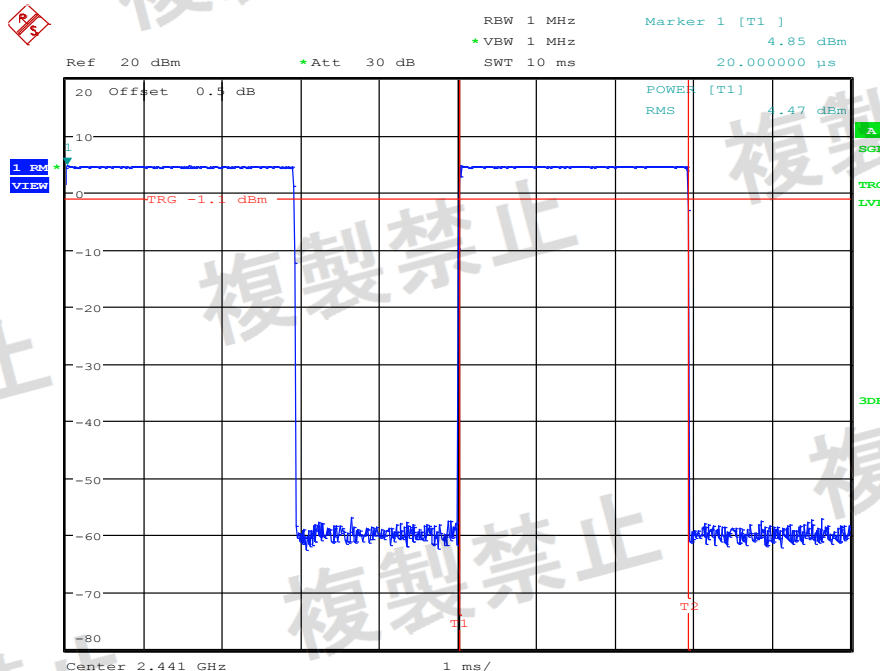


Date: 23.OCT.2018 17:06:25

Antenna Power_TNVN_DH5_2480_Ant1

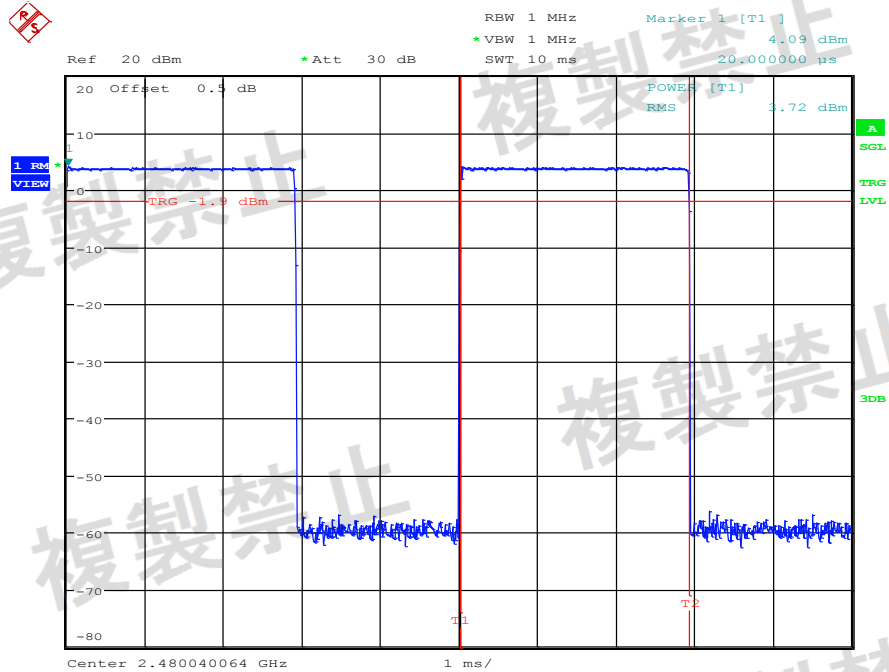


Date: 23.OCT.2018 17:07:58

Antenna Power_TNVN_2DH5_2402_Ant1

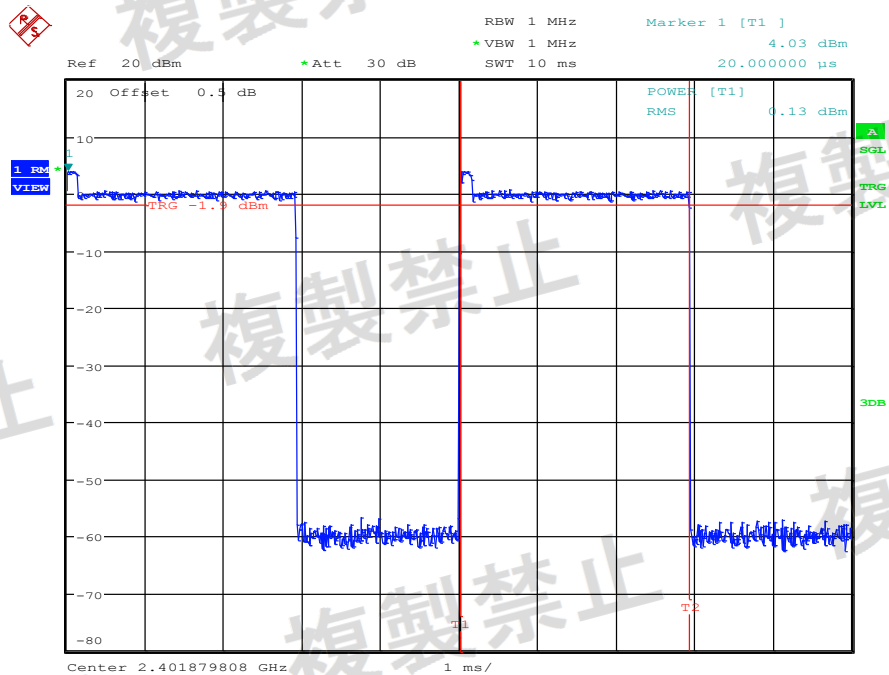


Date: 23.OCT.2018 17:12:47

Antenna Power_TNVN_2DH5_2441_Ant1


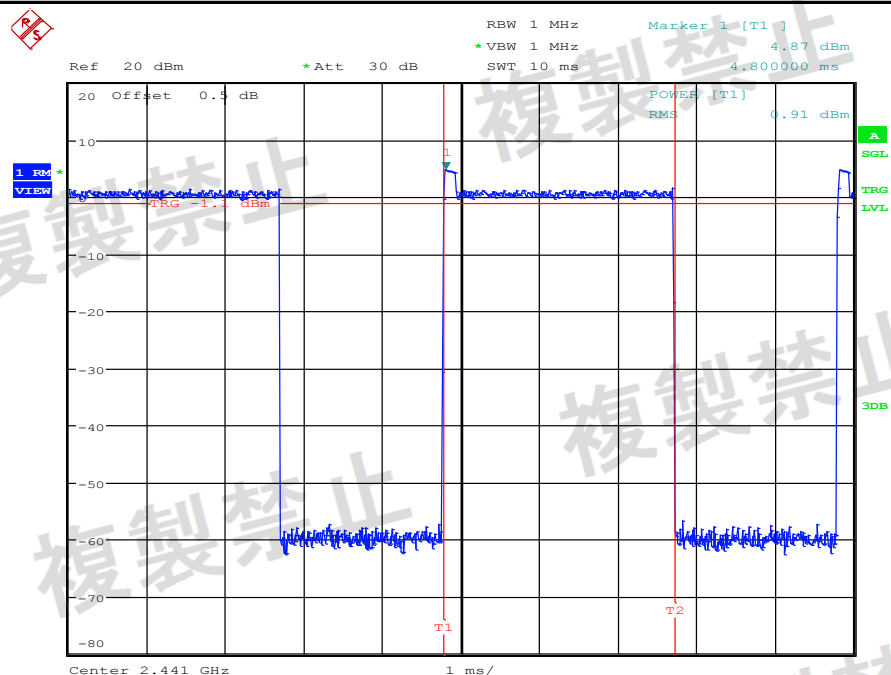



Date: 23.OCT.2018 17:14:05

Antenna Power_TNVN_2DH5_2480_Ant1

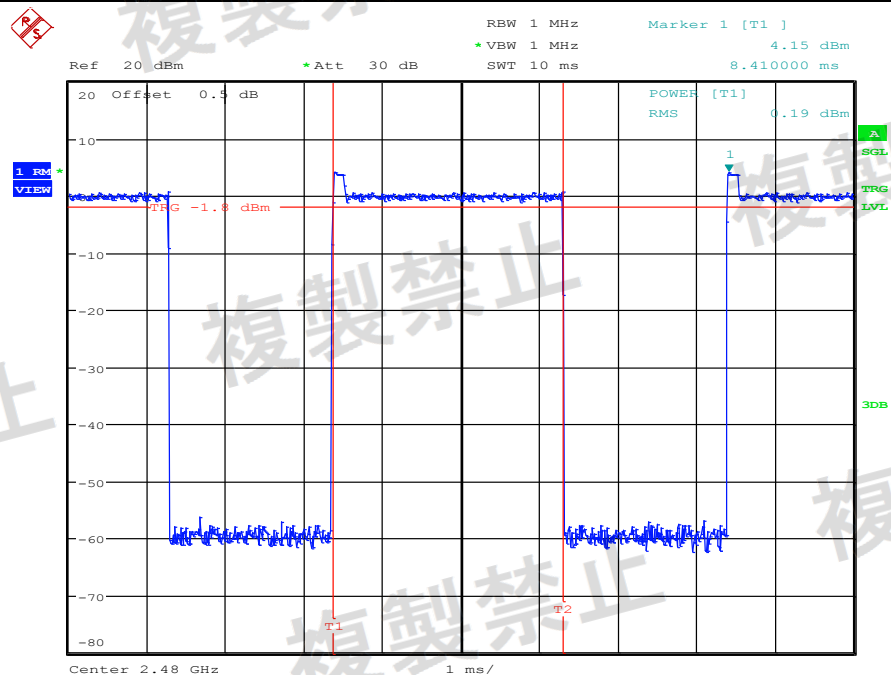

Date: 23.OCT.2018 17:16:29

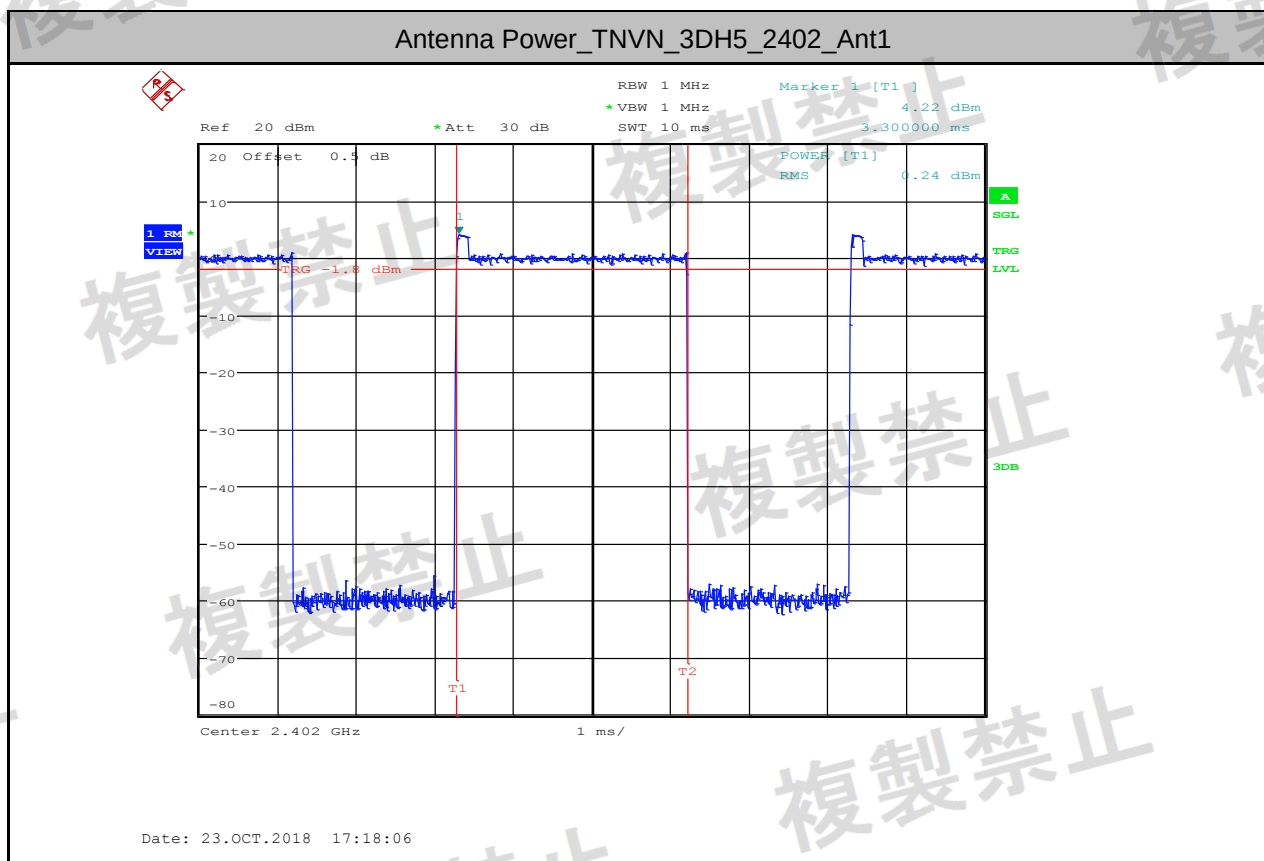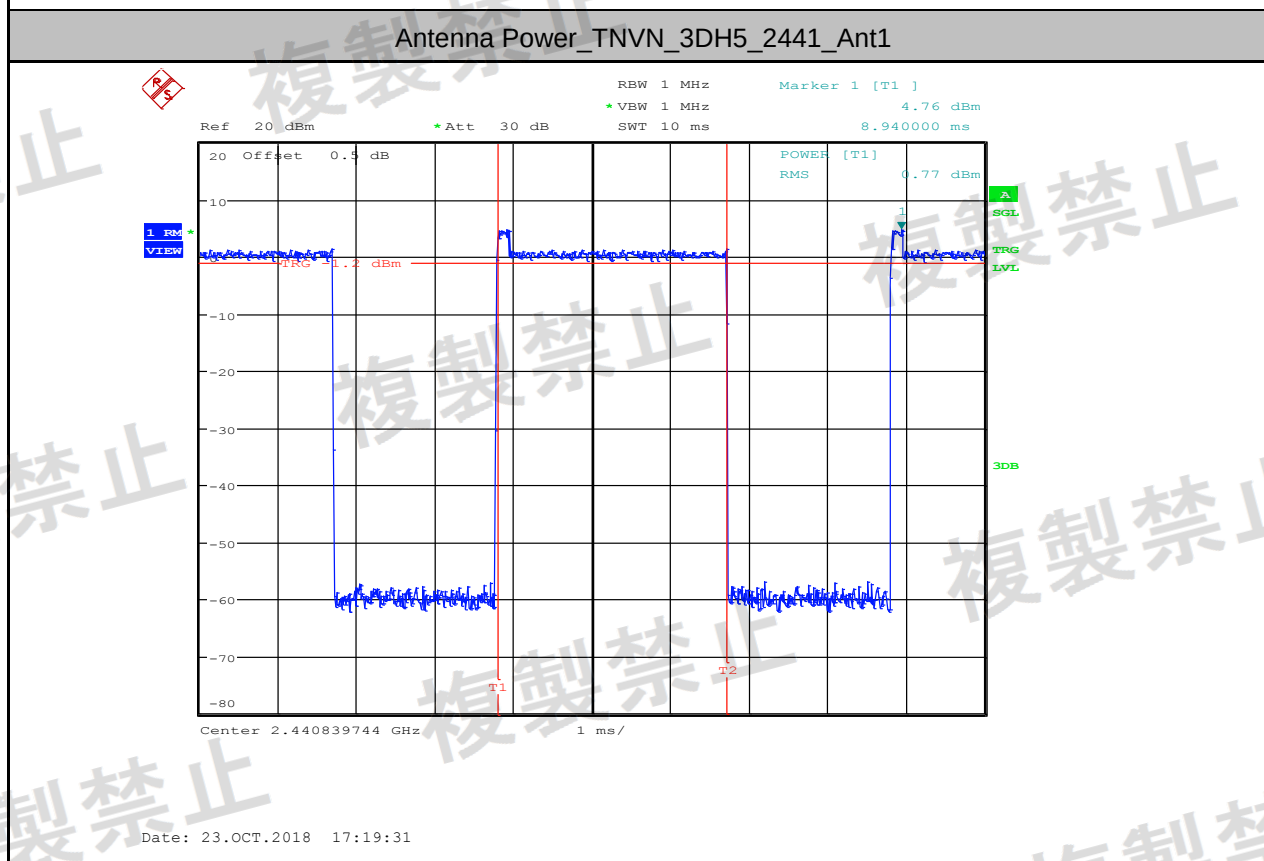

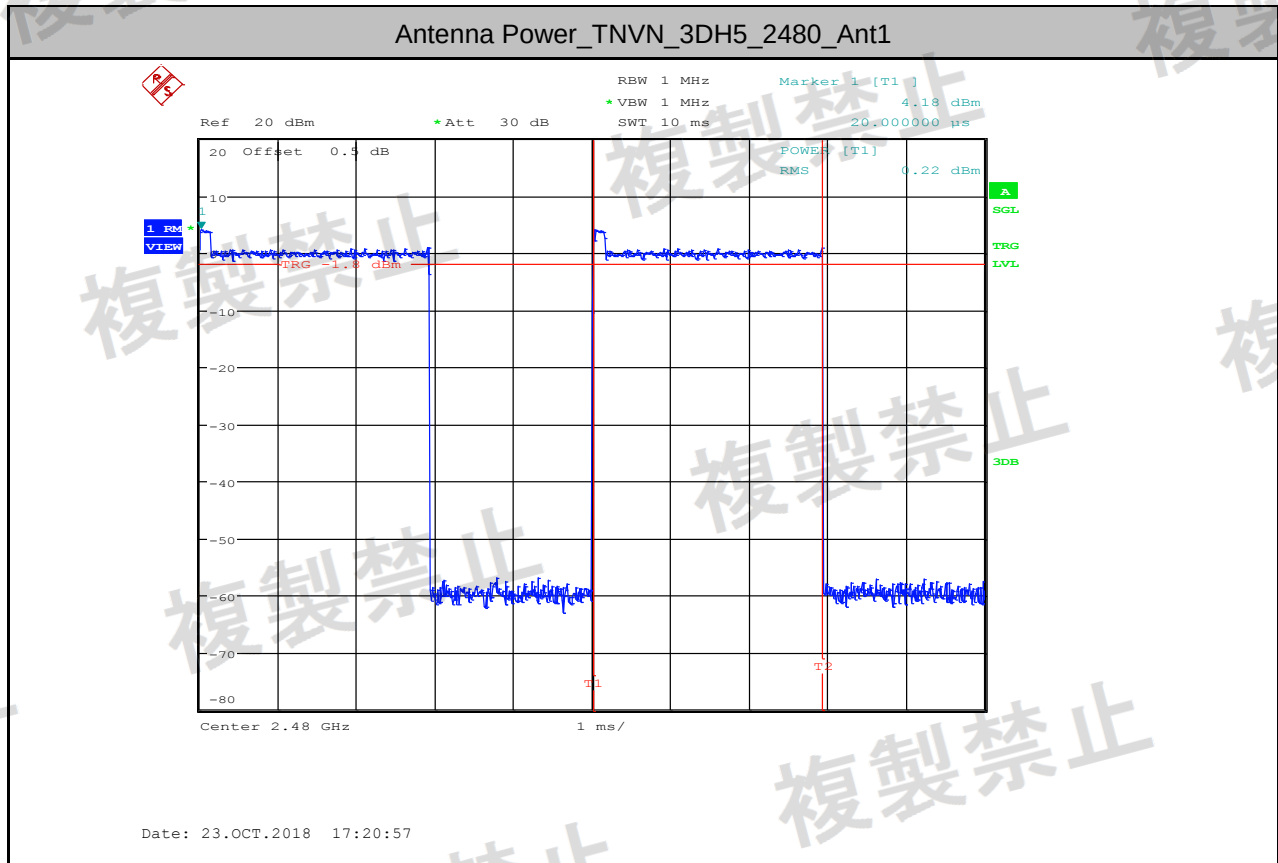


5.Spurious Emissions of Tx

Test Mode	Test Channel	StartFre[MHz]	StopFre[MHz]	Max.Fre[MHz]	Max.Level[μW]	Limit[μW]	Verdict
DH5	2402	30	2387	86.66	0.0021	2.5	PASS
DH5	2402	2387	2400	2399.99	7.7446	25.1	PASS
DH5	2402	2483.5	2496.5	2491.43	0.0041	25.1	PASS
DH5	2402	2496.5	13000	4803.54	0.8204	2.5	PASS
DH5	2441	30	2387	124.43	0.0030	2.5	PASS
DH5	2441	2387	2400	2389.35	0.0019	25.1	PASS
DH5	2441	2483.5	2496.5	2492.97	0.0073	25.1	PASS
DH5	2441	2496.5	13000	4881.46	0.8395	2.5	PASS
DH5	2480	30	2387	165.98	0.0023	2.5	PASS
DH5	2480	2387	2400	2387.91	0.0008	25.1	PASS
DH5	2480	2483.5	2496.5	2483.51	0.1096	25.1	PASS
DH5	2480	2496.5	13000	4960.07	0.6714	2.5	PASS
2DH5	2402	30	2387	2379.45	0.0010	2.5	PASS
2DH5	2402	2387	2400	2399.98	6.5615	25.1	PASS
2DH5	2402	2483.5	2496.5	2483.71	0.0034	25.1	PASS
2DH5	2402	2496.5	13000	4803.88	0.2965	2.5	PASS
2DH5	2441	30	2387	124.43	0.0022	2.5	PASS
2DH5	2441	2387	2400	2389.04	0.0016	25.1	PASS
2DH5	2441	2483.5	2496.5	2492.95	0.0049	25.1	PASS
2DH5	2441	2496.5	13000	4882.15	0.4955	2.5	PASS
2DH5	2480	30	2387	165.98	0.0005	2.5	PASS
2DH5	2480	2387	2400	2390.63	0.0008	25.1	PASS
2DH5	2480	2483.5	2496.5	2483.66	0.3548	25.1	PASS
2DH5	2480	2496.5	13000	4960.07	0.6653	2.5	PASS
3DH5	2402	30	2387	2379.45	0.0008	2.5	PASS
3DH5	2402	2387	2400	2399.96	6.6069	25.1	PASS
3DH5	2402	2483.5	2496.5	2486.82	0.0038	25.1	PASS
3DH5	2402	2496.5	13000	4804.22	0.4055	2.5	PASS
3DH5	2441	30	2387	124.43	0.0023	2.5	PASS
3DH5	2441	2387	2400	2389.07	0.0018	25.1	PASS


3DH5	2441	2483.5	2496.5	2492.99	0.0057	25.1	PASS
3DH5	2441	2496.5	13000	4881.81	0.3491	2.5	PASS
3DH5	2480	30	2387	165.98	0.0007	2.5	PASS
3DH5	2480	2387	2400	2388.26	0.0006	25.1	PASS
3DH5	2480	2483.5	2496.5	2483.88	0.3083	25.1	PASS
3DH5	2480	2496.5	13000	4960.42	0.4395	2.5	PASS

Spurious Emissions of Tx_TNVN_DH5_2402_Ant1

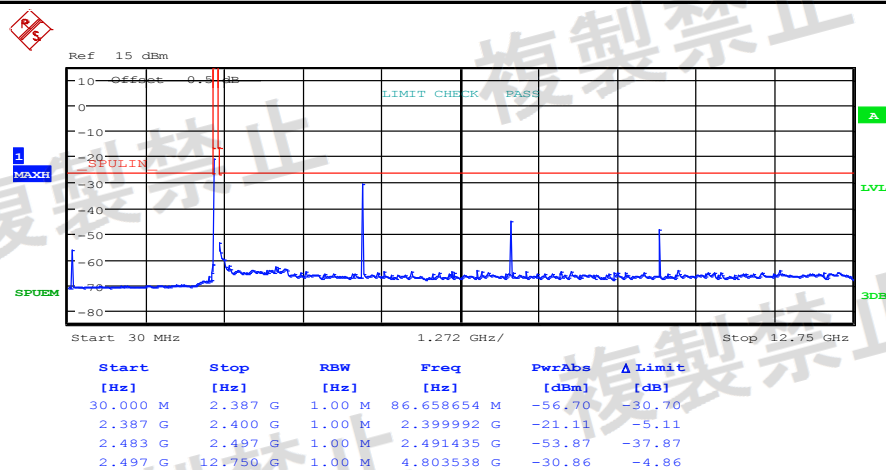


Date: 23.OCT.2018 17:05:26

Spurious Emissions of Tx_TNVN_DH5_2441_Ant1

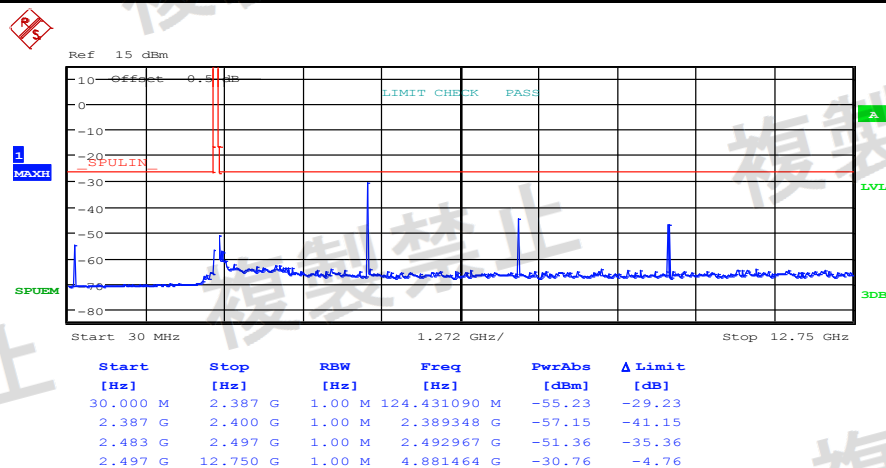


Date: 23.OCT.2018 17:06:51

Spurious Emissions of Tx_TNVN_DH5_2480_Ant1

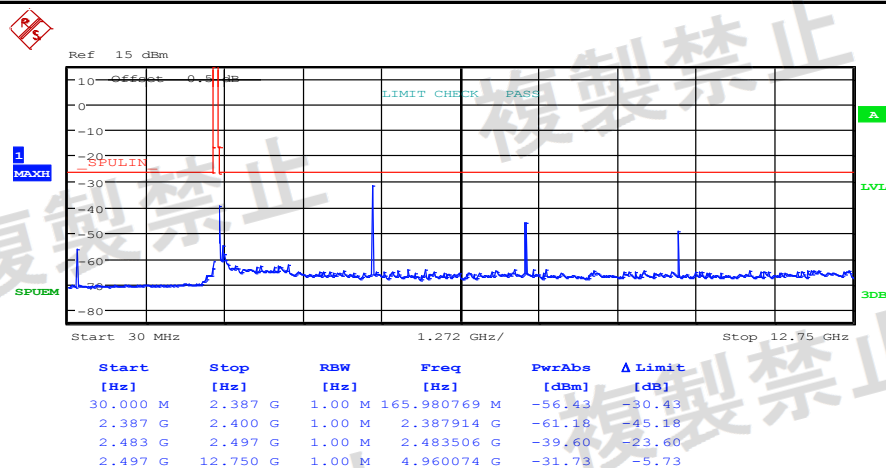


Date: 23.OCT.2018 17:08:24

Spurious Emissions of Tx_TNVN_2DH5_2402_Ant1

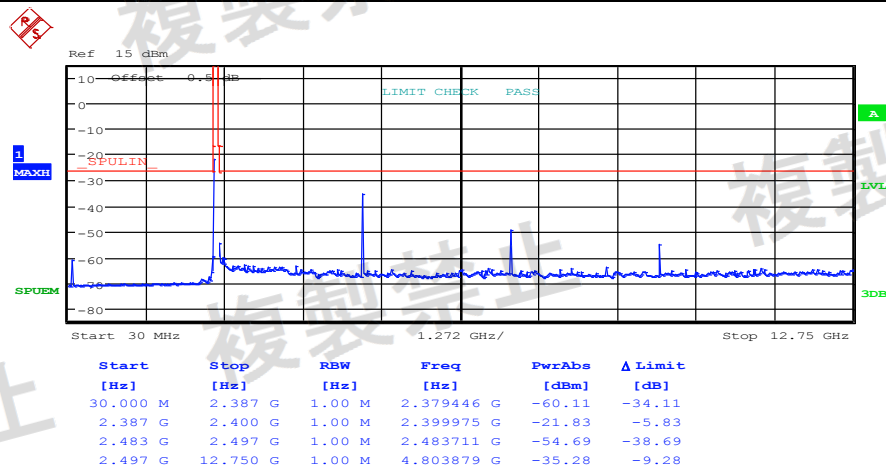


Date: 23.OCT.2018 17:13:13

Spurious Emissions of Tx_TNVN_2DH5_2441_Ant1

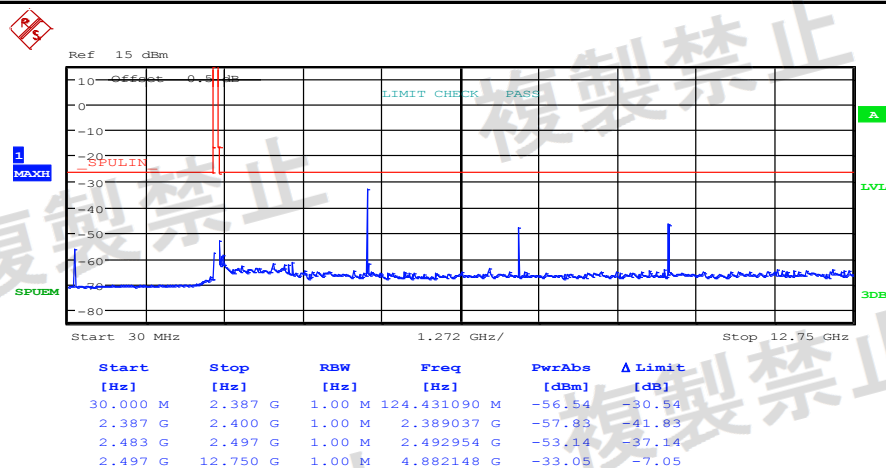


Date: 23.OCT.2018 17:14:31

Spurious Emissions of Tx_TNVN_2DH5_2480_Ant1

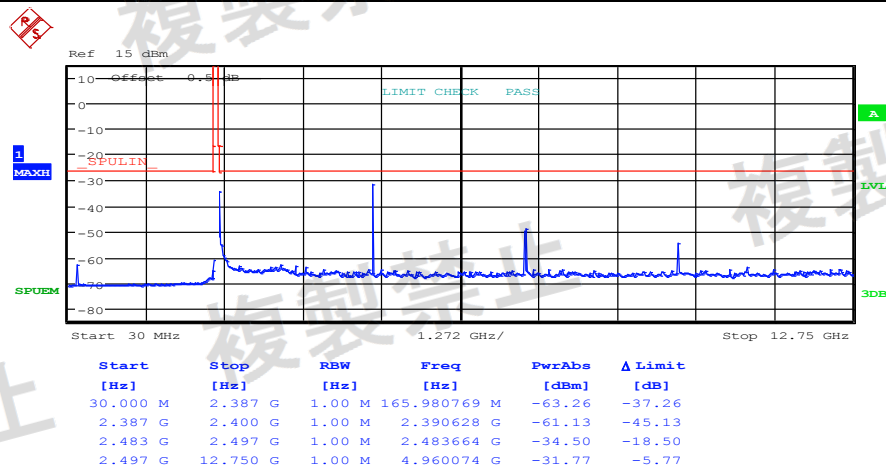


Date: 23.OCT.2018 17:16:55

Spurious Emissions of Tx_TNVN_3DH5_2402_Ant1

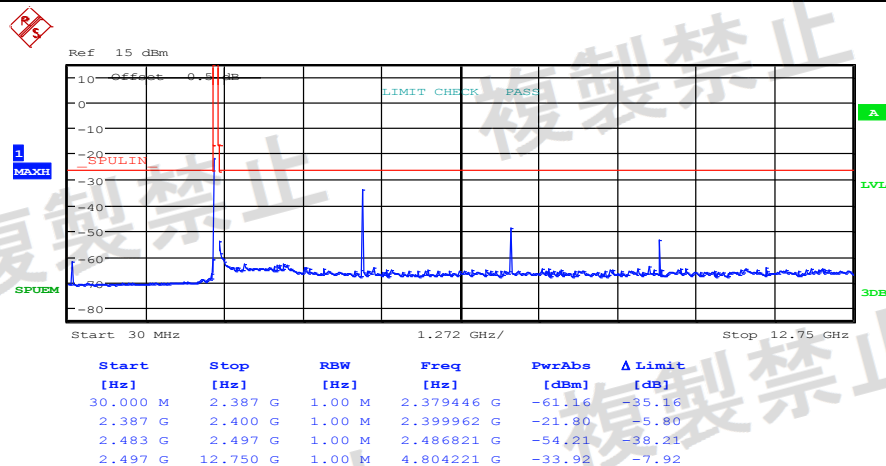


Date: 23.OCT.2018 17:18:32

Spurious Emissions of Tx_TNVN_3DH5_2441_Ant1

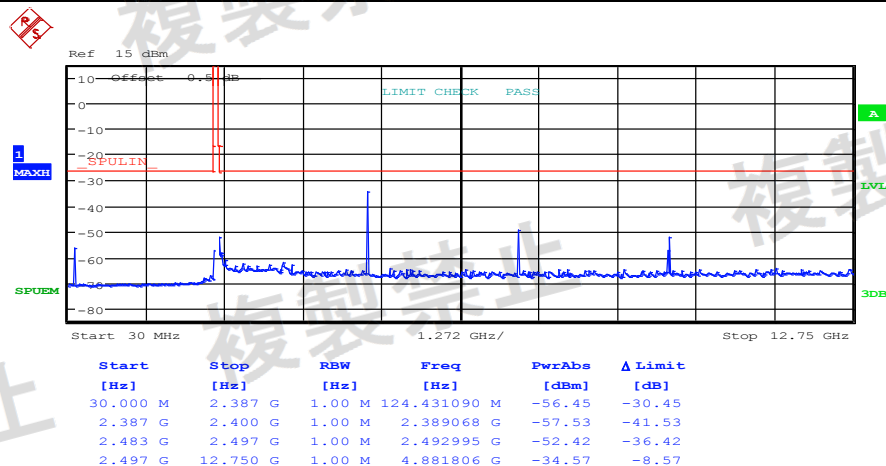

Date: 23.OCT.2018 17:19:58

Spurious Emissions of Tx_TNVN_3DH5_2480_Ant1

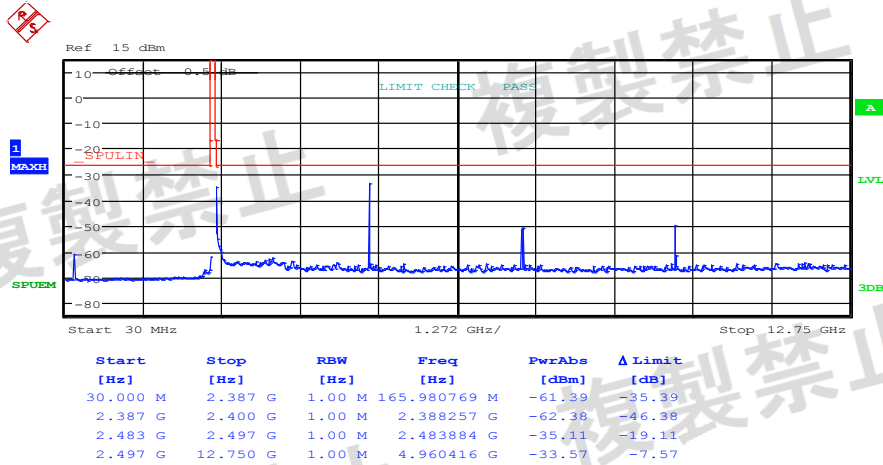


Date: 23.OCT.2018 17:21:24



6.Spurious Emissions of Rx


Test Mode	Test Channel	StartFre[MHz]	StopFre[MHz]	Max.Fre[MHz]	Max.Level[nW]	Limit[nW]	Verdict
DH5	2402	1000	13000	9613.93	4.266	20	PASS
DH5	2402	30	1000	373.54	0.032	4	PASS
DH5	2441	1000	13000	9773.72	3.698	20	PASS
DH5	2441	30	1000	930.05	0.033	4	PASS
DH5	2480	1000	13000	9926.47	4.645	20	PASS
DH5	2480	30	1000	815.02	0.030	4	PASS

Spurious Emissions of Rx_TNVN_DH5_2402_Ant1

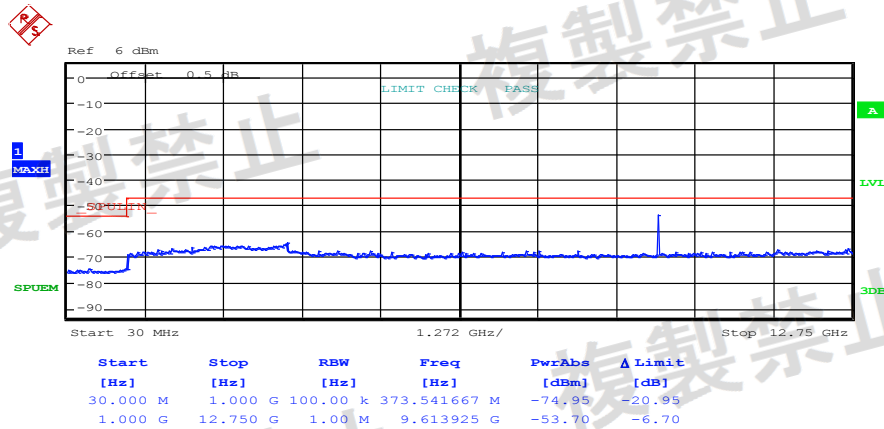


Date: 23.OCT.2018 17:28:41

Spurious Emissions of Rx_TNVN_DH5_2441_Ant1

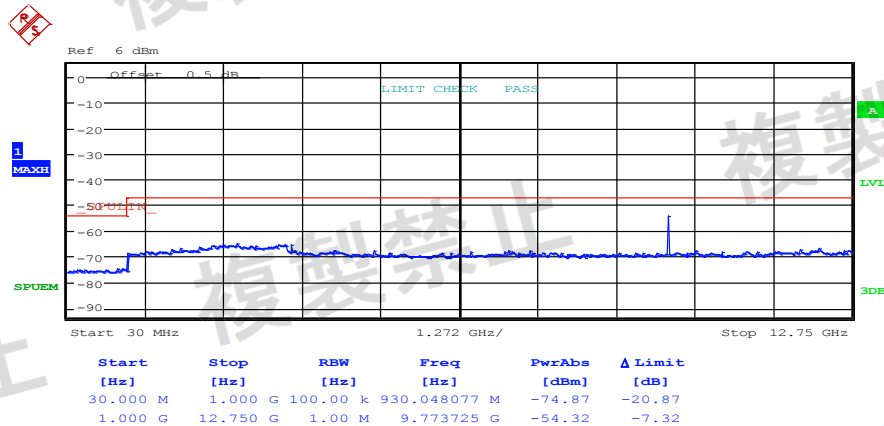

Date: 23.OCT.2018 17:29:02

Spurious Emissions of Rx_TNVN_DH5_2480_Ant1

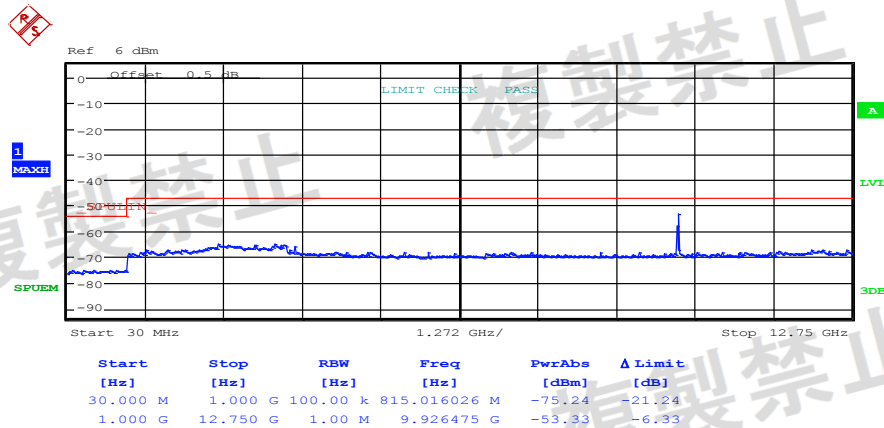

Date: 23.OCT.2018 17:29:21

7.Dwell Time



Test Condition	Test Mode	Test Channel	Ant	Burst Width[ms]	Dwell Time[s]	Limit[s]	Verdict
TNVN	DH5	2402	Ant1	2.90	0.21	<0.4	PASS
TNVN	DH5	2441	Ant1	2.92	0.21	<0.4	PASS
TNVN	DH5	2480	Ant1	2.90	0.21	<0.4	PASS
TNVN	2DH5	2402	Ant1	2.90	0.21	<0.4	PASS
TNVN	2DH5	2441	Ant1	2.90	0.21	<0.4	PASS
TNVN	2DH5	2480	Ant1	2.90	0.21	<0.4	PASS
TNVN	3DH5	2402	Ant1	2.92	0.21	<0.4	PASS
TNVN	3DH5	2441	Ant1	2.90	0.21	<0.4	PASS
TNVN	3DH5	2480	Ant1	2.92	0.21	<0.4	PASS



Total Dwell Time shall be calculated by the following formula:



Total Dwell Time = (0.4 x Spreading Rate x Transmit ON Time) / (Burst Cycle x Number of Hopping Channels)



Remark:


- Spreading Rate = Spread Bandwidth (measured value) / Transmission Rate
- Transmit ON Time and Burst Cycle are both measured in Seconds
- Numerical Coefficient (0.4) is a dimensionless number defined in the technical standard.

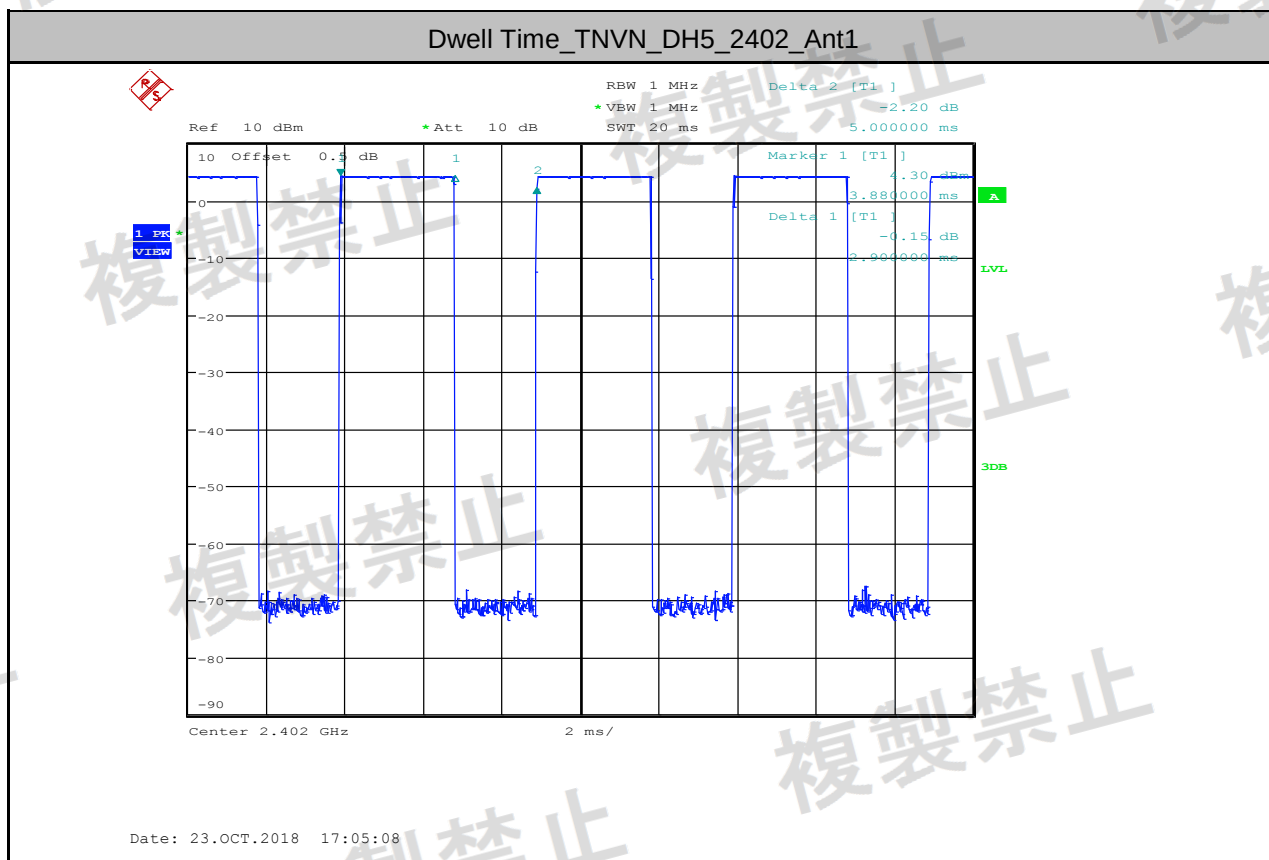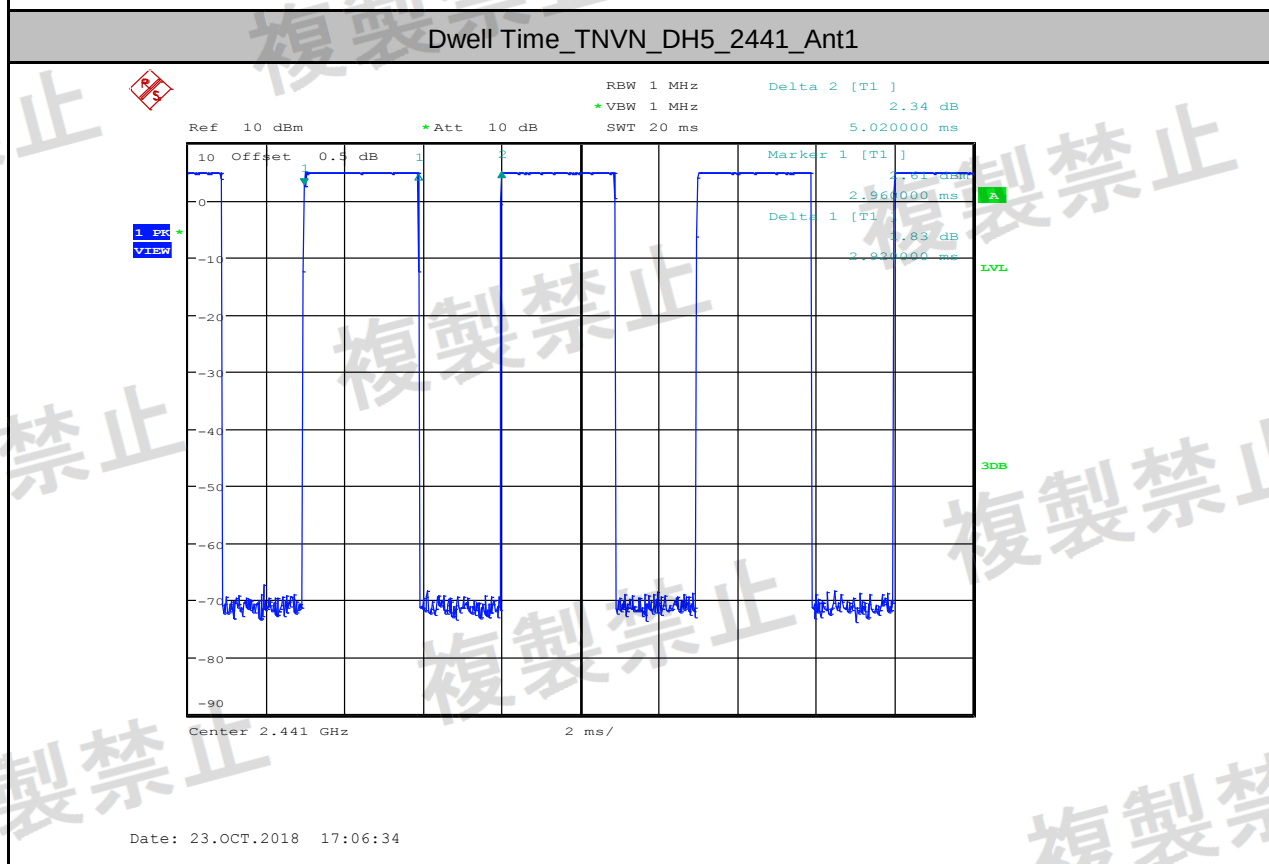

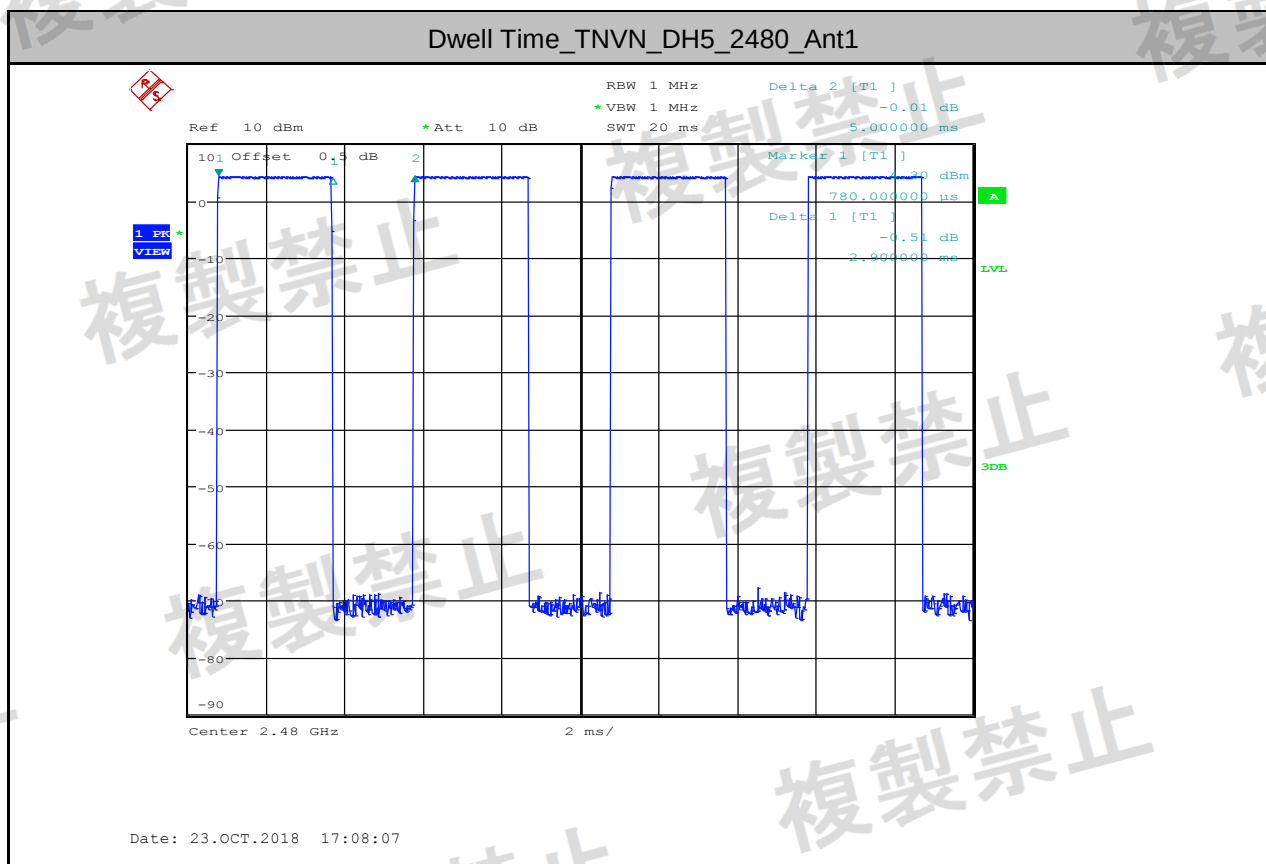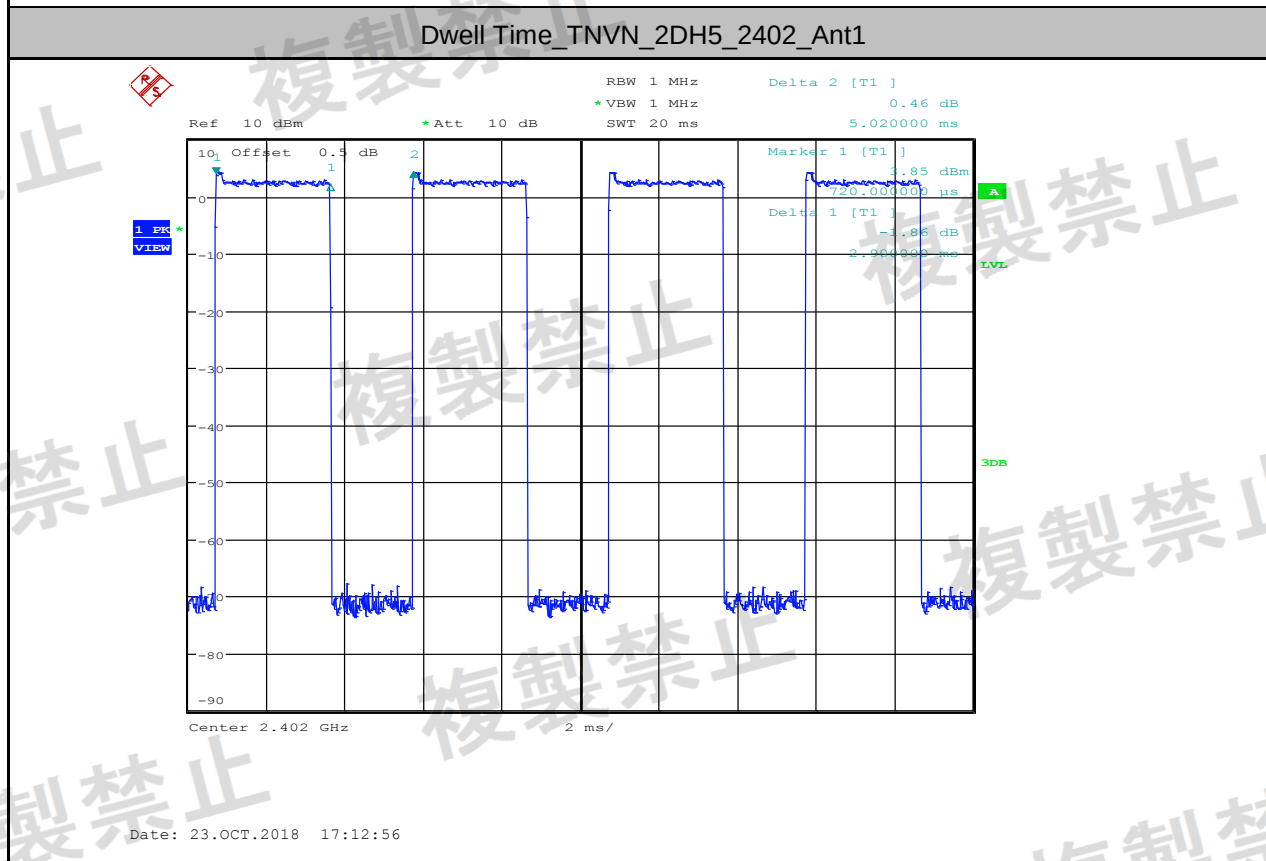

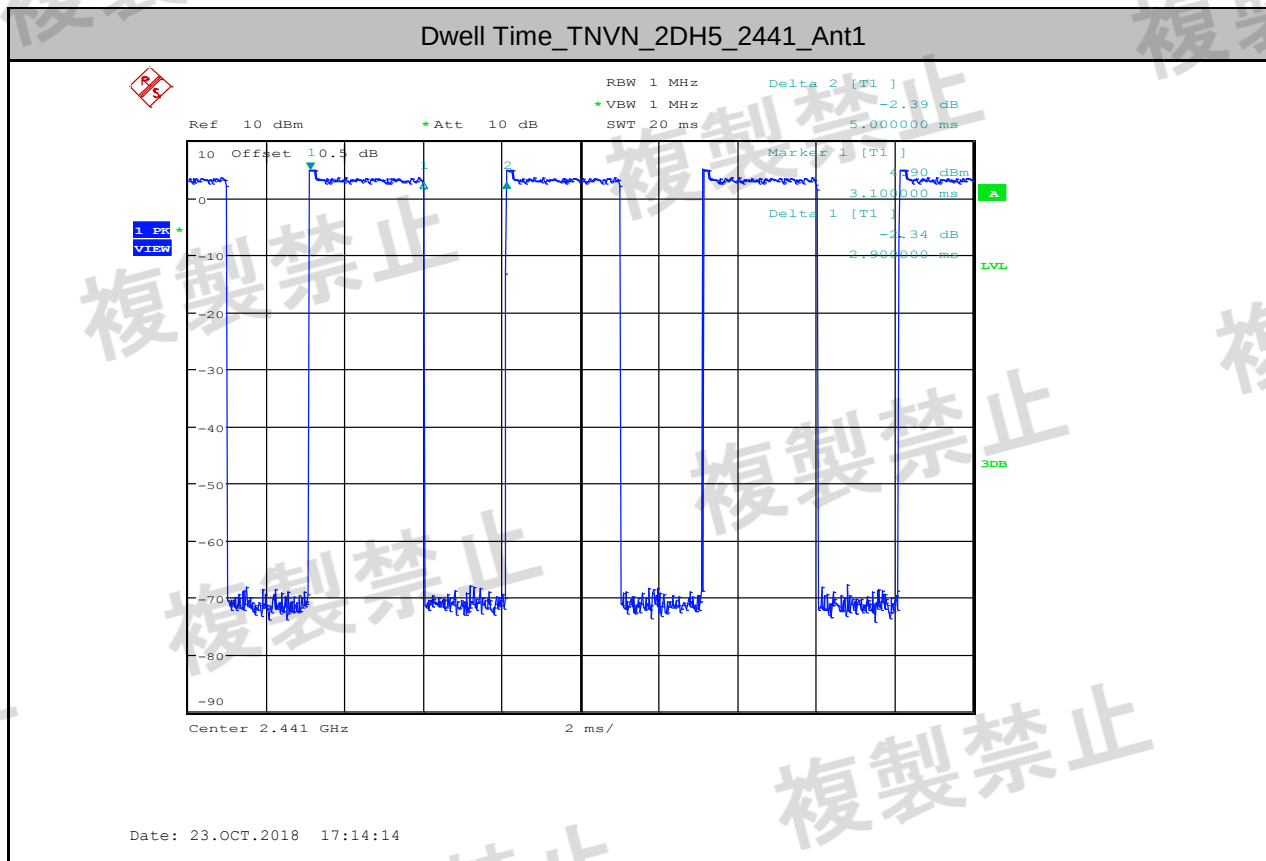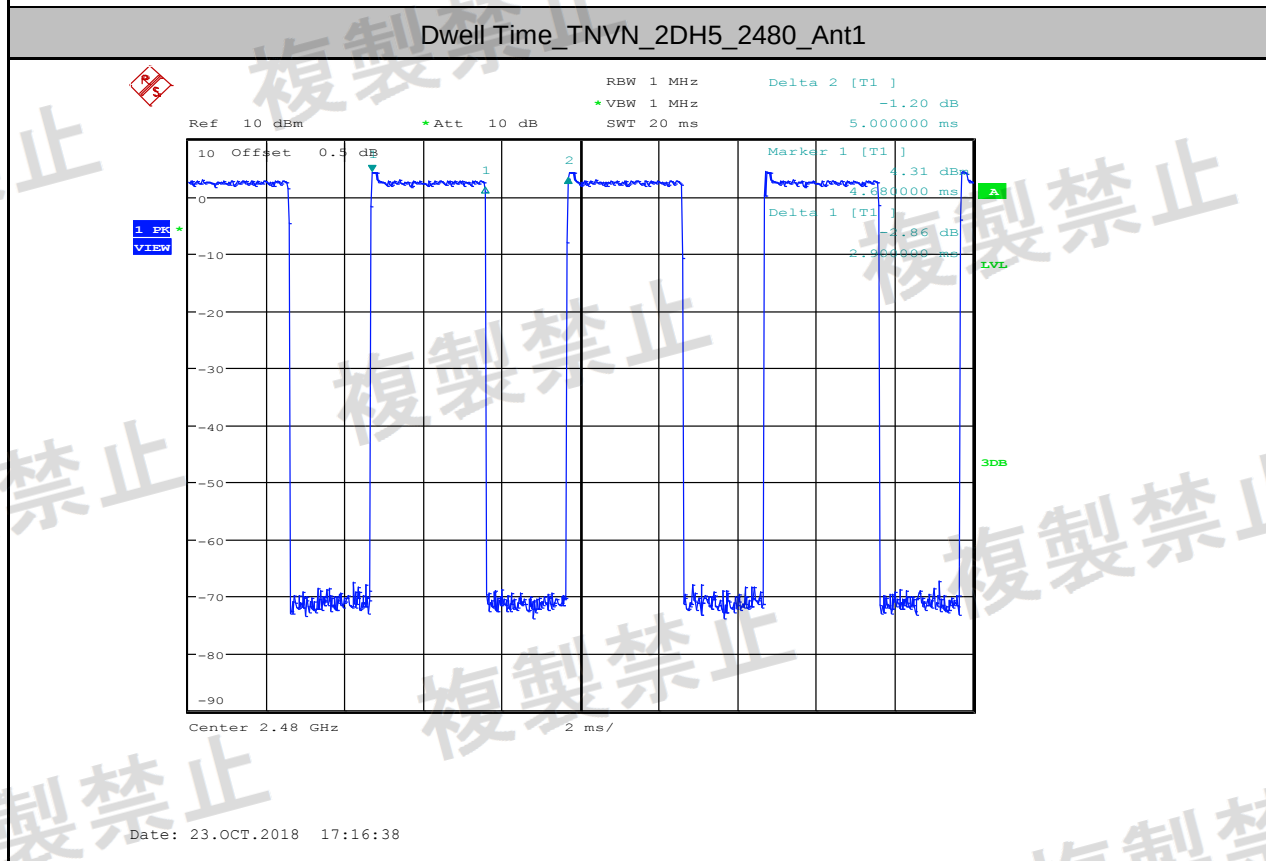

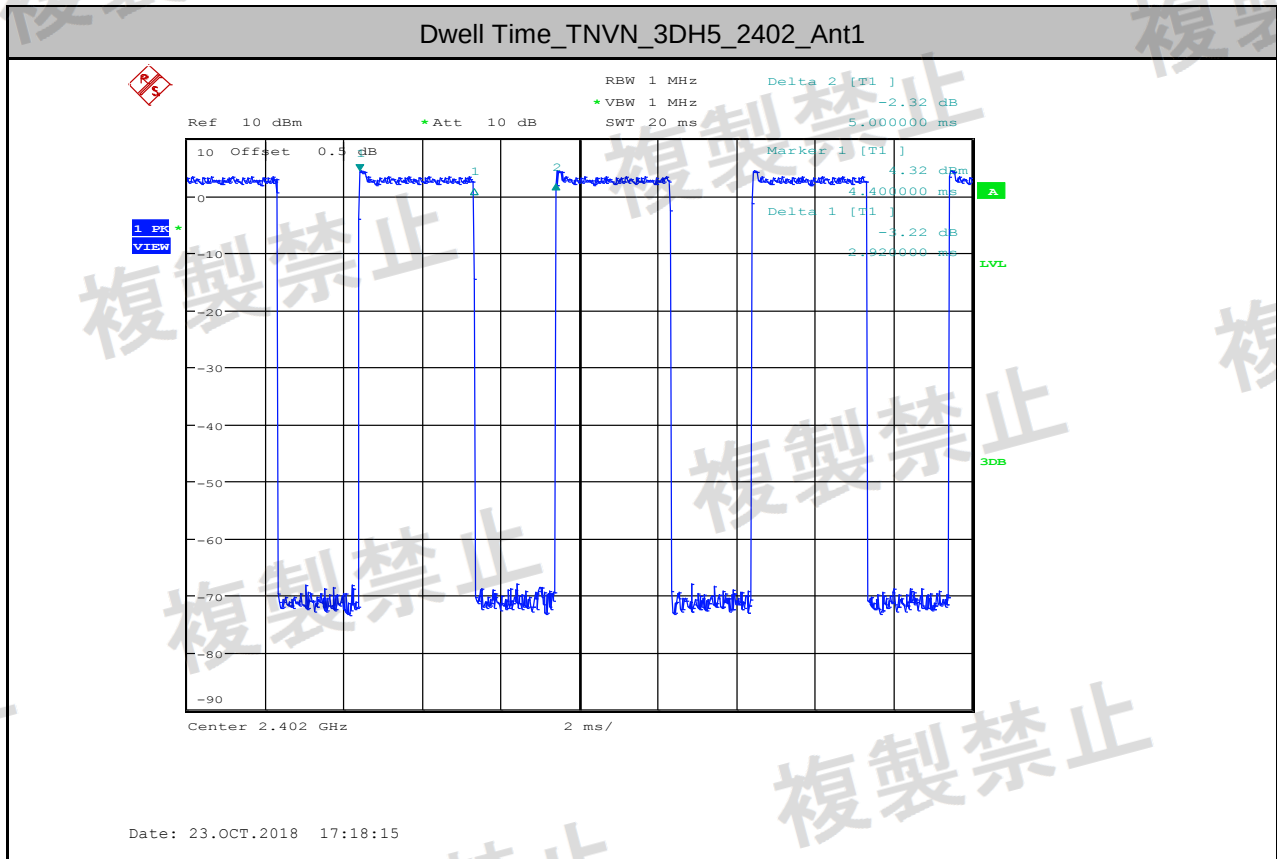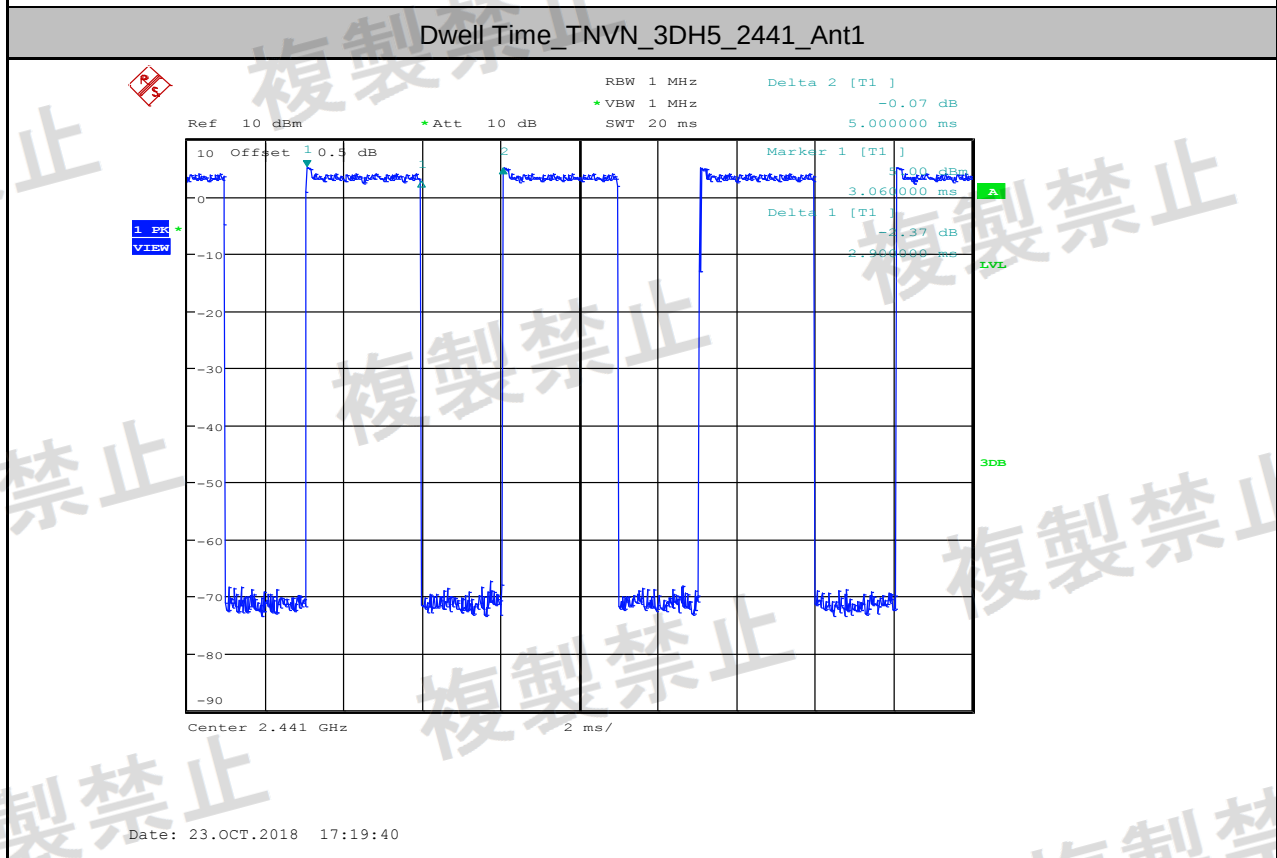

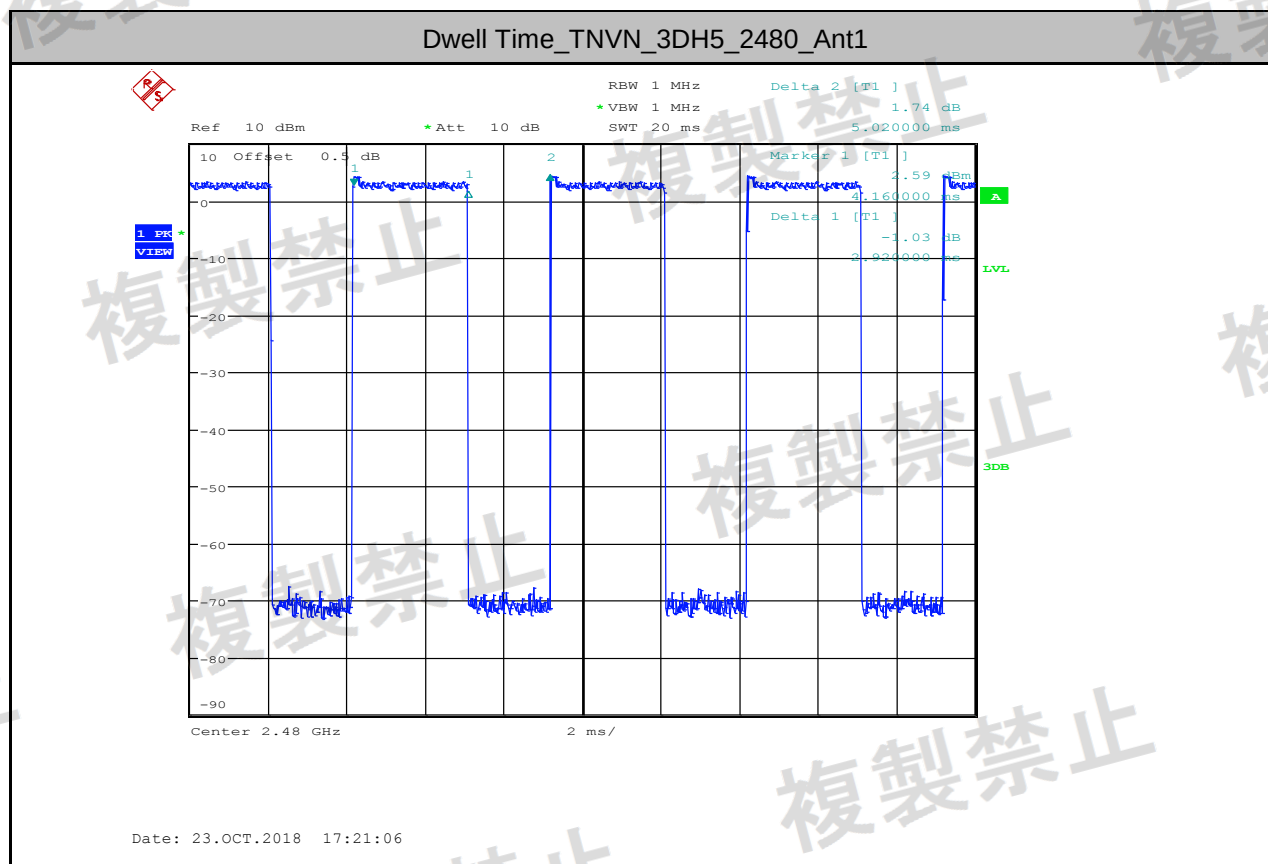


Right

1.Frequency Error


Test Condition	Test Mode	Test Channel	Ant	Result[MHz]	Result[PPM]	Limit[PPM]	Verdict
TNVN	DH5	2402	Ant1	2402.00	0.00	$\leq \pm 50$	PASS
TNVN	DH5	2441	Ant1	2441.00	0.00	$\leq \pm 50$	PASS
TNVN	DH5	2480	Ant1	2480.00	0.40	$\leq \pm 50$	PASS

Frequency Error_TNVN_DH5_2402_Ant1

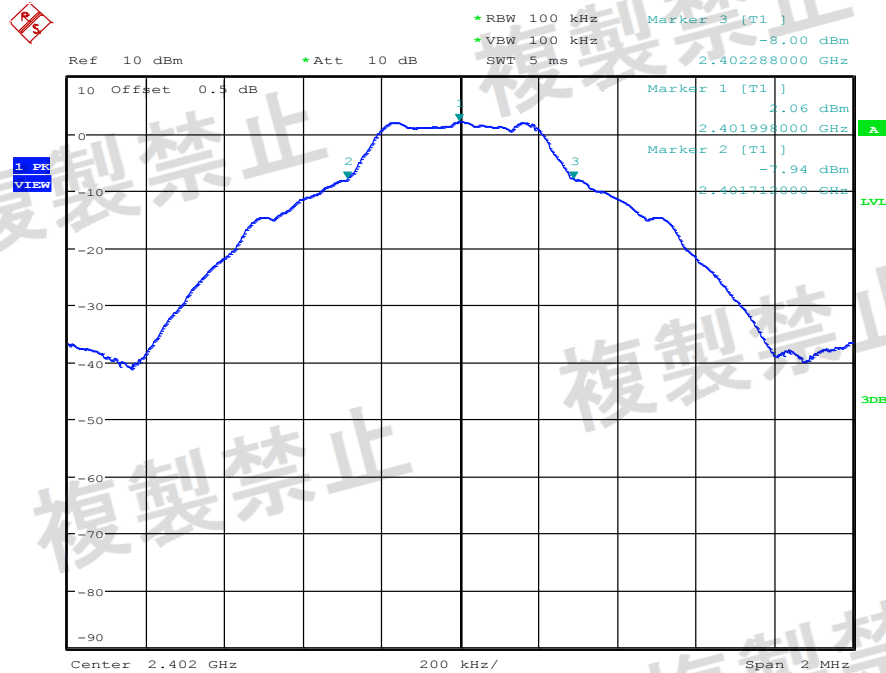


Date: 24.OCT.2018 12:14:51

Frequency Error_TNVN_DH5_2441_Ant1

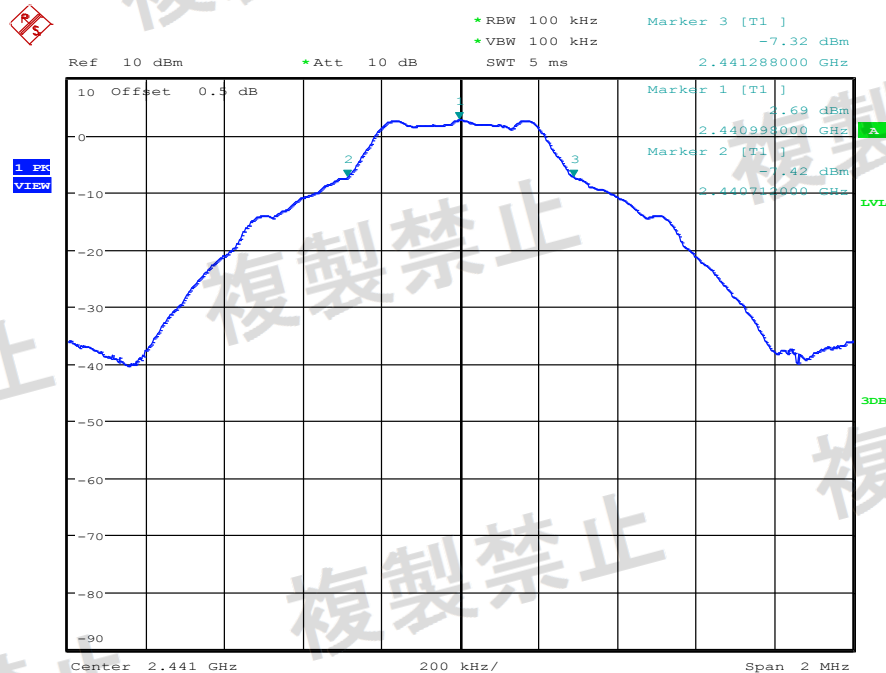


Date: 24.OCT.2018 12:15:31

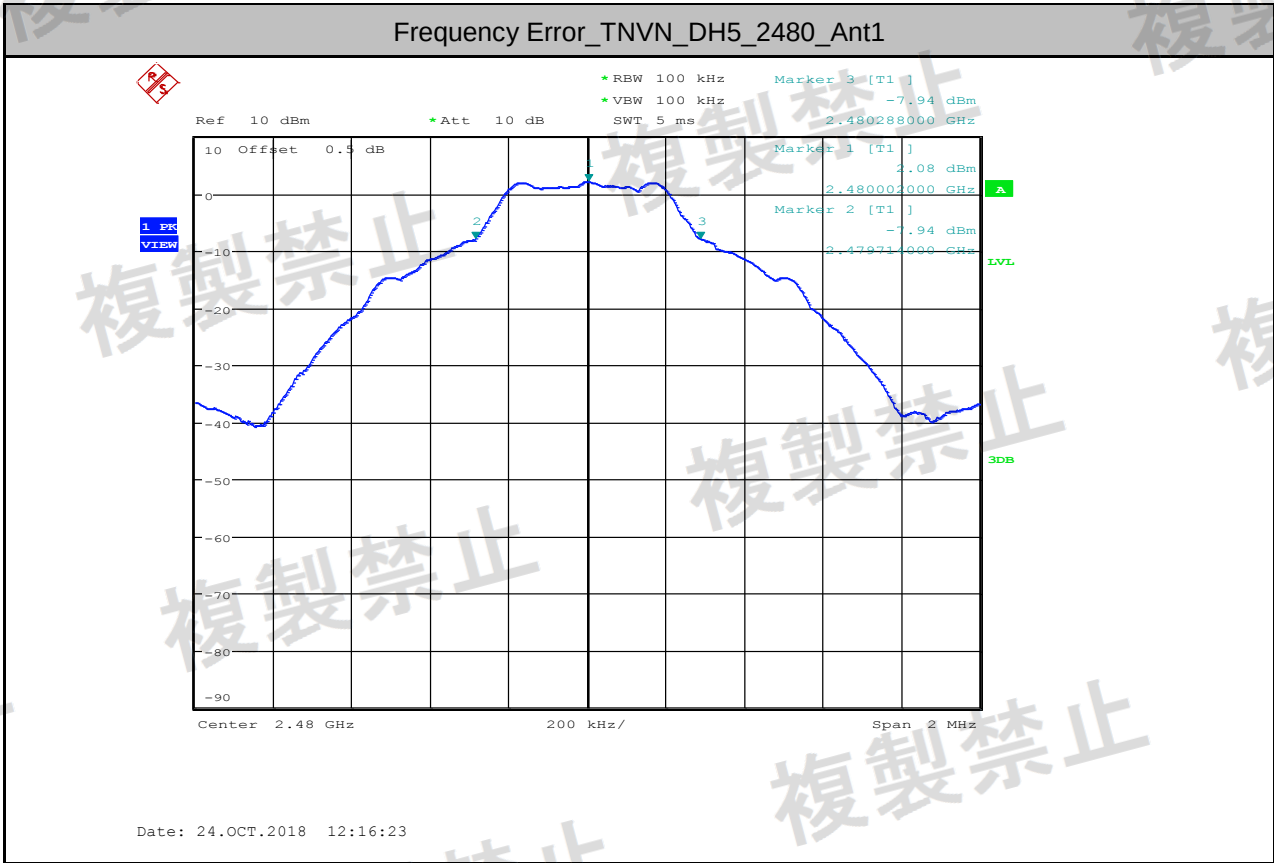

2.Occupied Bandwidth (99%)


Test Condition	Test Mode	Test Channel	Ant	Test Result[MHz]	Limit [MHz]	Verdict
TNVN	DH5	2441	Ant1	78.817	<=83.5	PASS
TNVN	2DH5	2441	Ant1	78.950	<=83.5	PASS
TNVN	3DH5	2441	Ant1	78.817	<=83.5	PASS

Occupied Bandwidth_TNVN_DH5_2441_Ant1

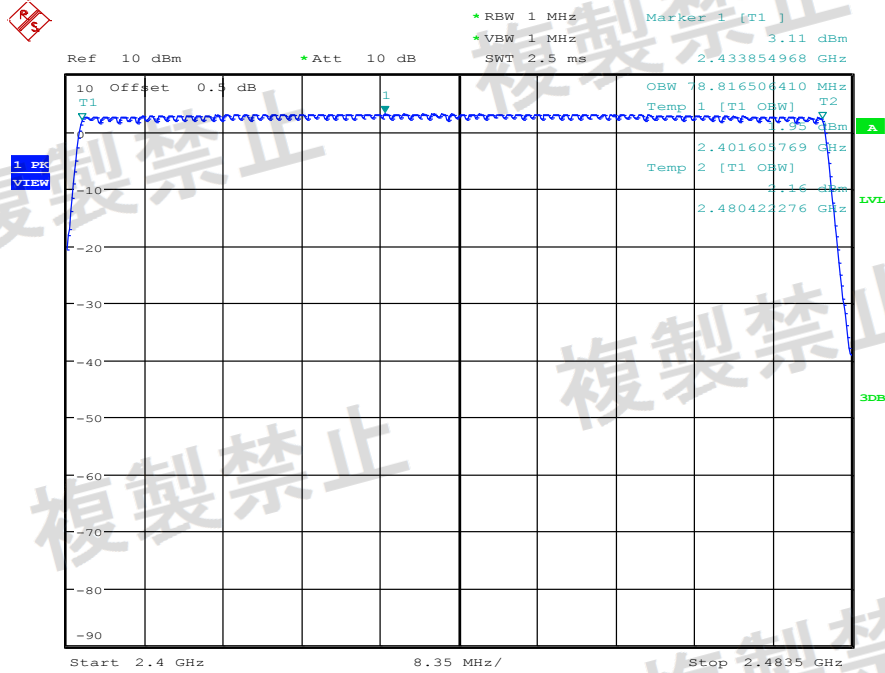


Date: 24.OCT.2018 11:38:40

Occupied Bandwidth_TNVN_2DH5_2441_Ant1

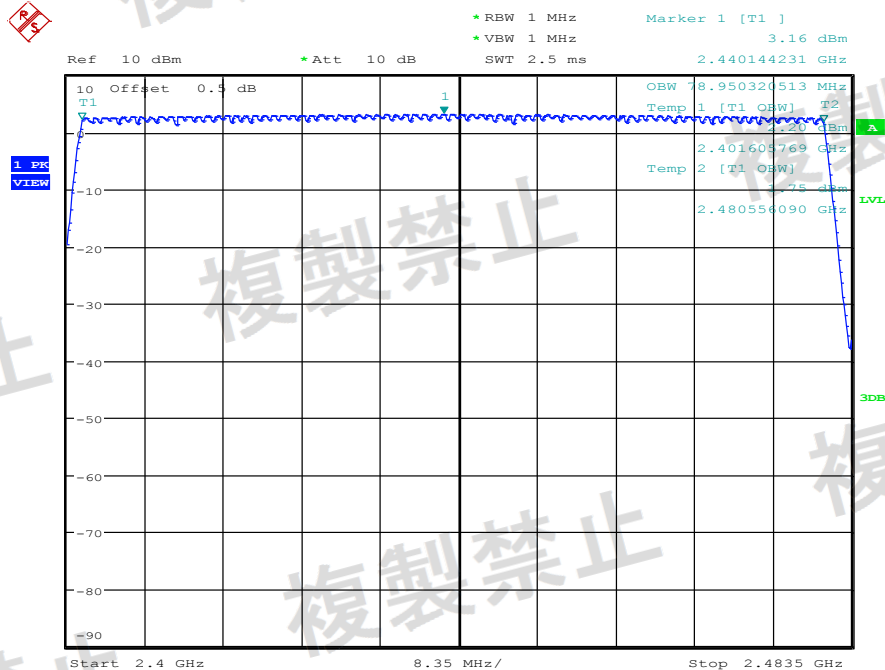


Date: 24.OCT.2018 11:44:34

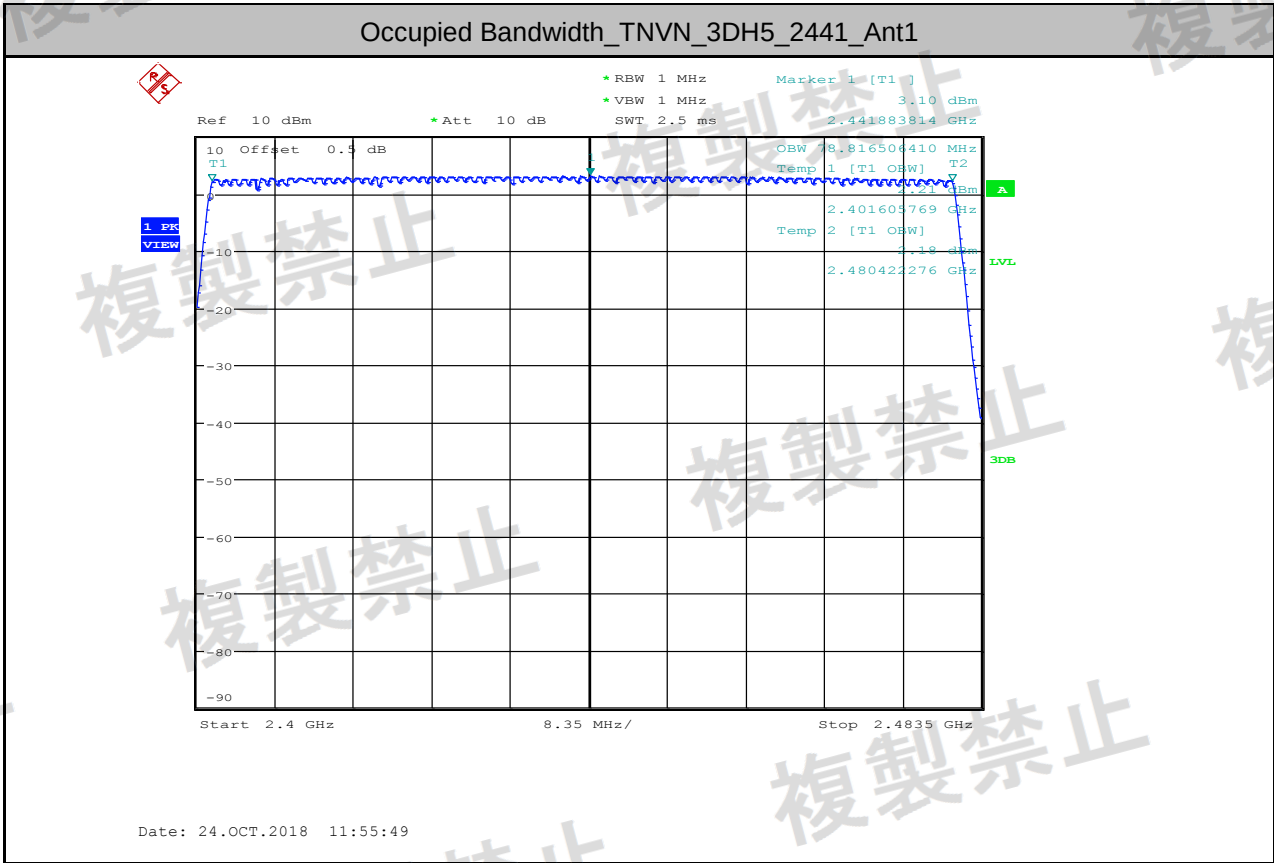


3.Spread spectrum Bandwidth (90%)


Test Condition	Test Mode	Test Channel	Ant	Test Result[MHz]	Limit [MHz]	Verdict
TNVN	DH5	2441	Ant1	71.055	>=0.5	PASS
TNVN	2DH5	2441	Ant1	71.189	>=0.5	PASS
TNVN	3DH5	2441	Ant1	71.055	>=0.5	PASS

Spread spectrum Bandwidth_TNVN_DH5_2441_Ant1

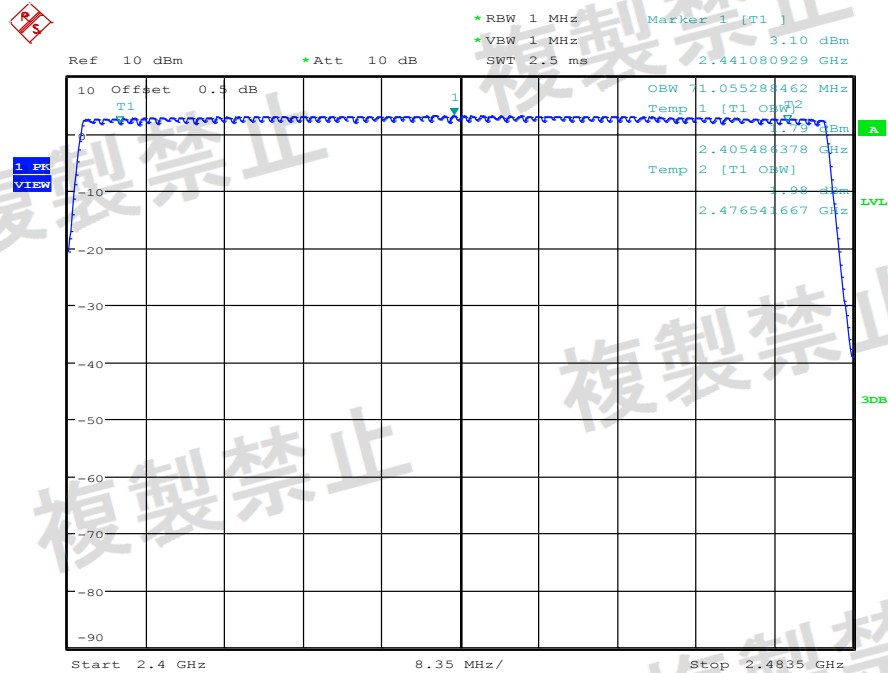

Spread spectrum Bandwidth_TNVN_2DH5_2441_Ant1

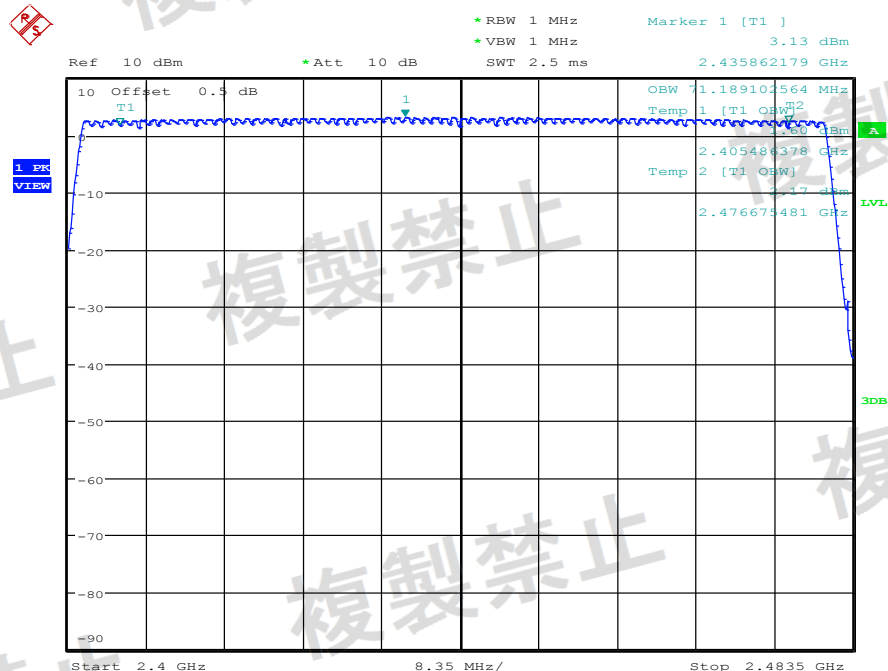


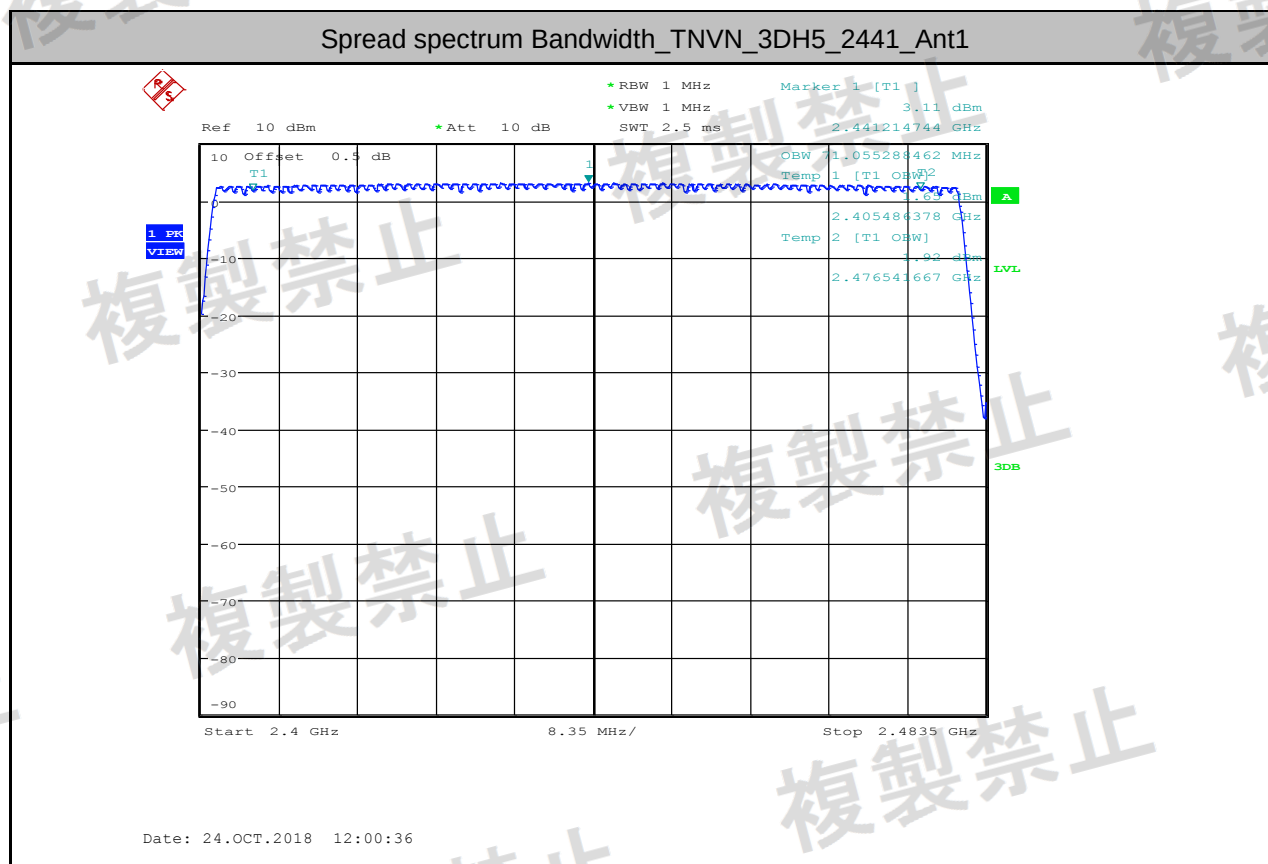

4. Antenna Power


Test Condition	Test Mode	Test Channel	Ant	Power [mW/MHz]	Limit [mW/MHz]	Normal Power [mW/MHz]	Tolerance[%]	Limit [%]	Verdict
TNVN	DH5	2402	Ant1	1.54	3	2	-23.000	-80 to +20	PASS
TNVN	DH5	2441	Ant1	1.8	3	2	-10.000	-80 to +20	PASS
TNVN	DH5	2480	Ant1	1.55	3	2	-22.500	-80 to +20	PASS
TNVN	2DH5	2402	Ant1	0.68	3	1	-32.000	-80 to +20	PASS
TNVN	2DH5	2441	Ant1	0.8	3	1	-20.000	-80 to +20	PASS
TNVN	2DH5	2480	Ant1	0.68	3	1	-32.000	-80 to +20	PASS
TNVN	3DH5	2402	Ant1	0.68	3	1	-32.000	-80 to +20	PASS
TNVN	3DH5	2441	Ant1	0.79	3	1	-21.000	-80 to +20	PASS
TNVN	3DH5	2480	Ant1	0.67	3	1	-33.000	-80 to +20	PASS

Antenna Power_TNVN_DH5_2402_Ant1

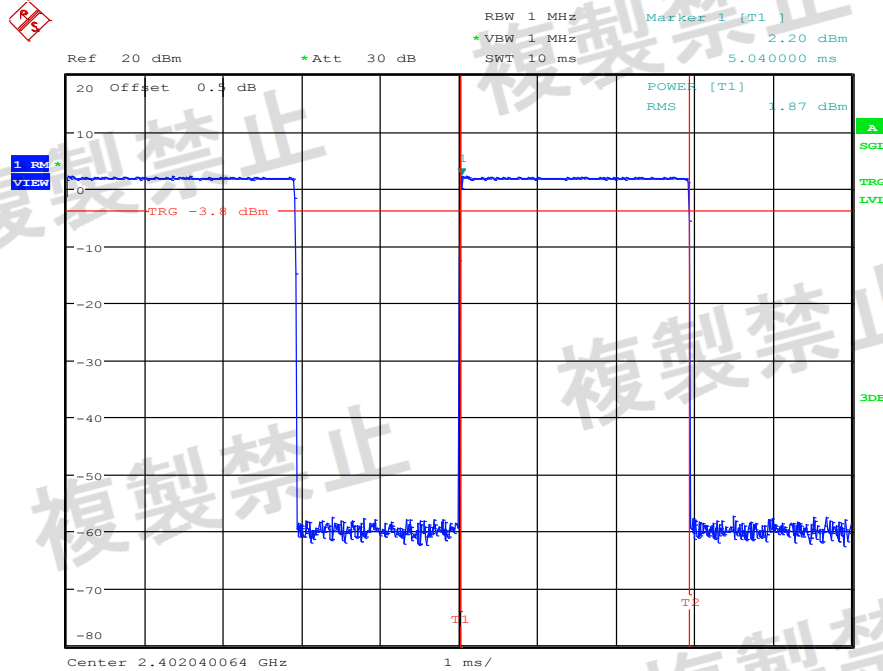


Date: 24.OCT.2018 12:02:13

Antenna Power_TNVN_DH5_2441_Ant1

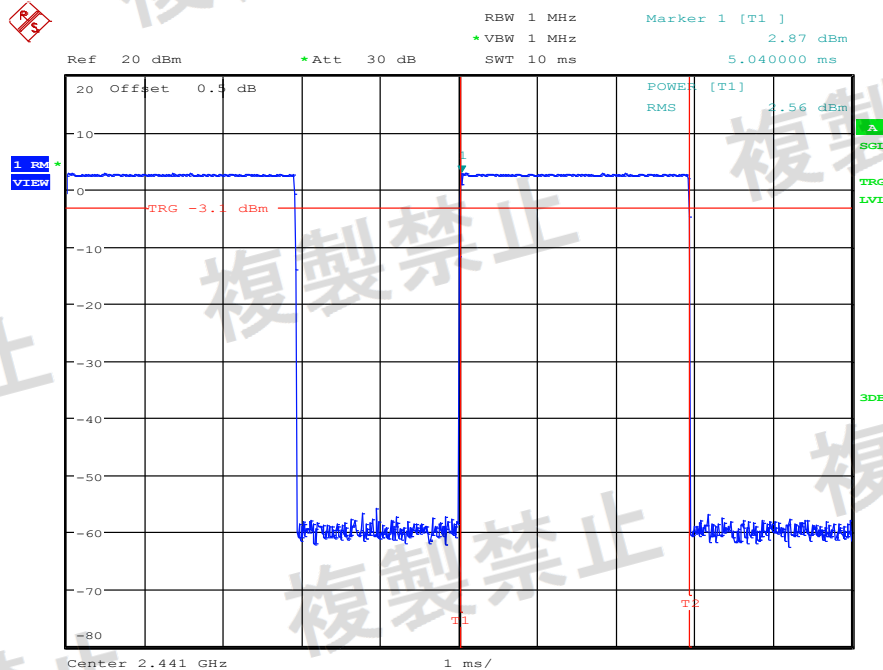


Date: 24.OCT.2018 12:03:32

Antenna Power_TNVN_DH5_2480_Ant1

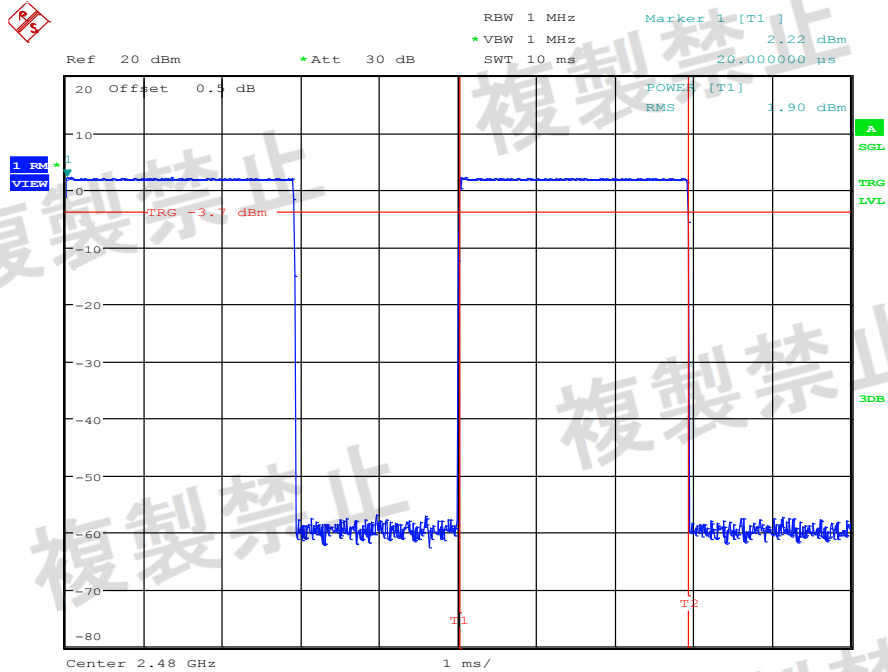


Date: 24.OCT.2018 12:04:53

Antenna Power_TNVN_2DH5_2402_Ant1

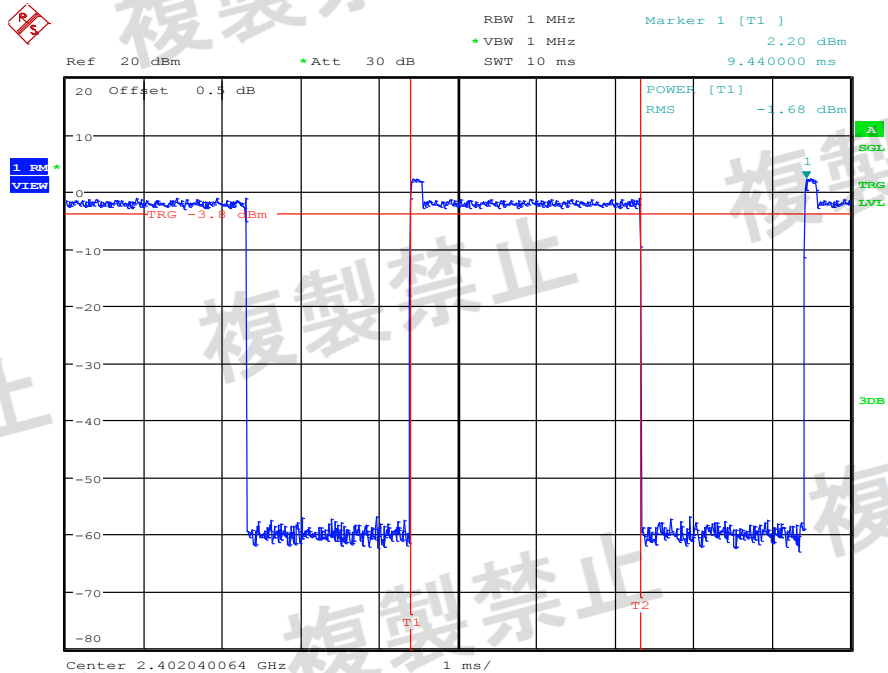


Date: 24.OCT.2018 12:06:27

Antenna Power_TNVN_2DH5_2441_Ant1

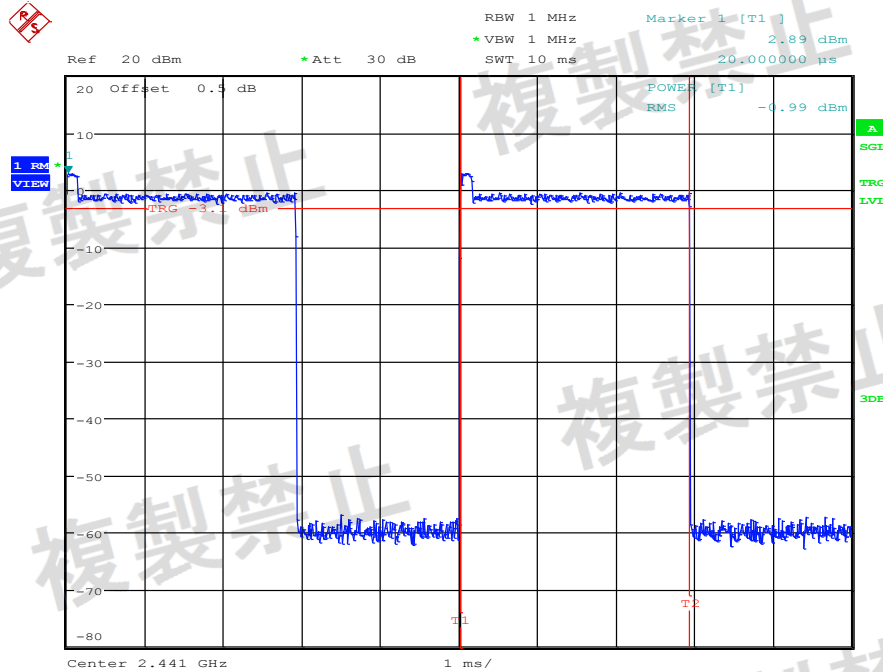


Date: 24.OCT.2018 12:07:46

Antenna Power_TNVN_2DH5_2480_Ant1

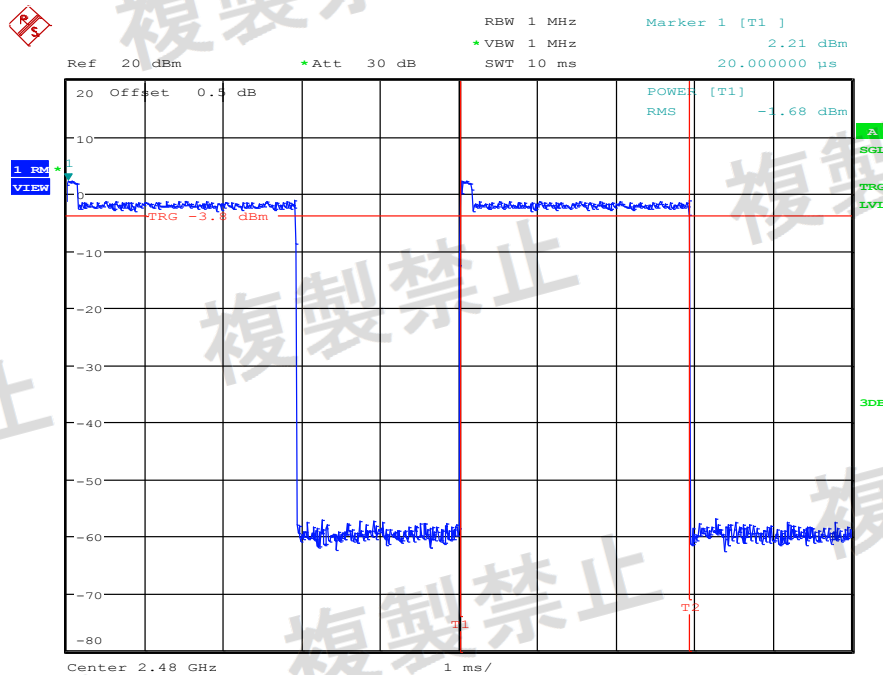


Date: 24.OCT.2018 12:09:05

Antenna Power_TNVN_3DH5_2402_Ant1

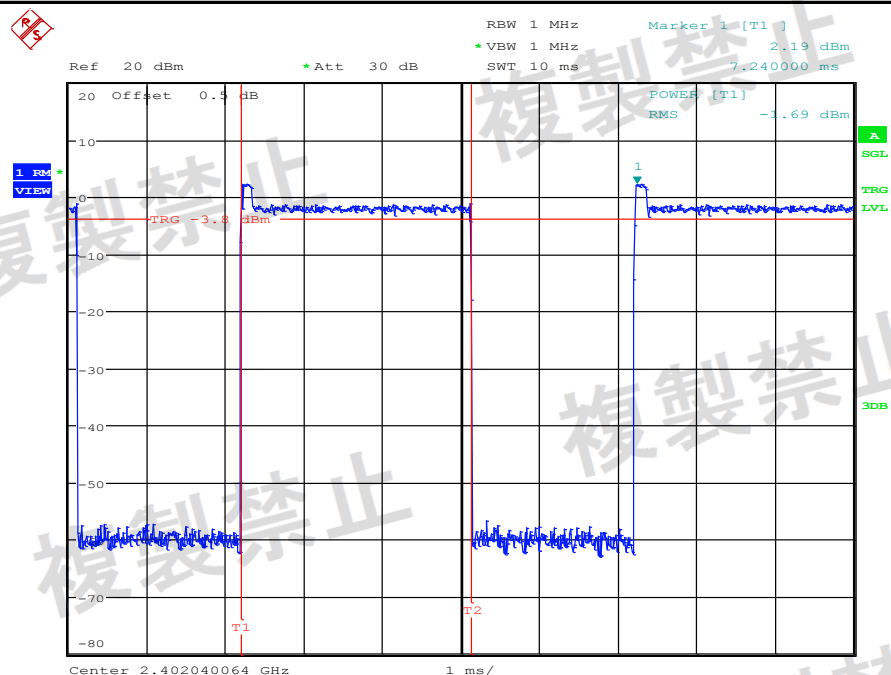


Date: 24.OCT.2018 12:10:31

Antenna Power_TNVN_3DH5_2441_Ant1

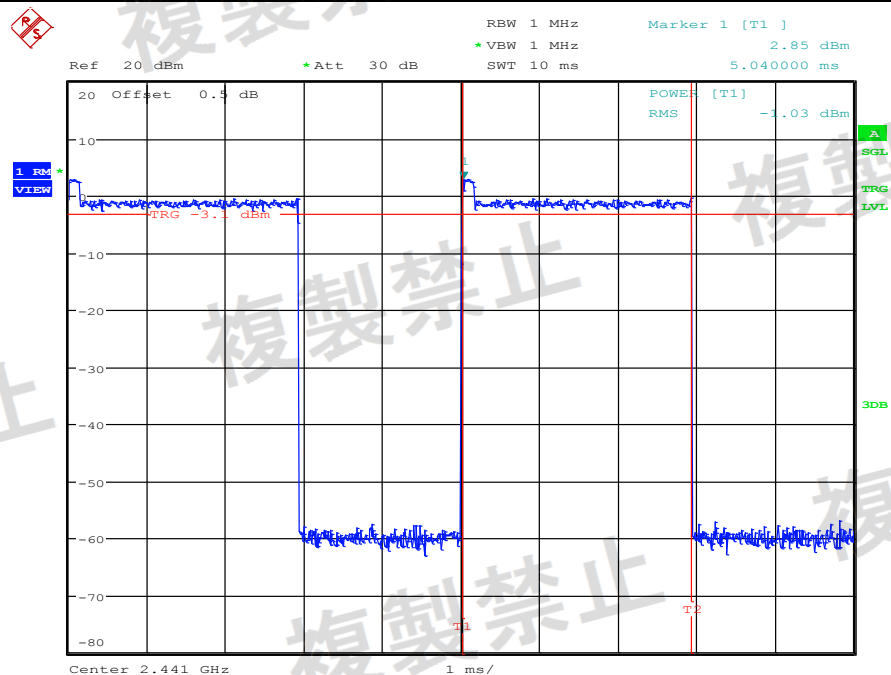

Date: 24.OCT.2018 12:11:51

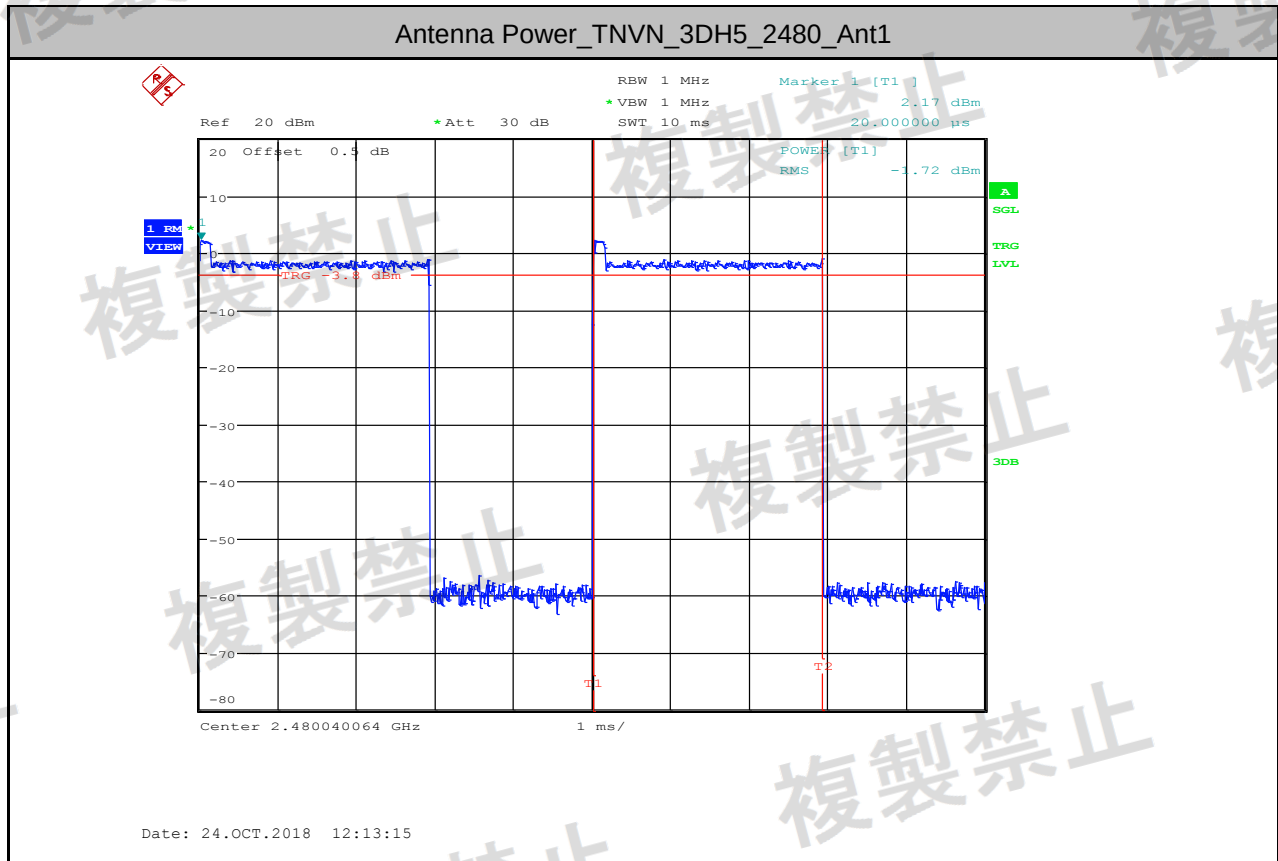


5.Spurious Emissions of Tx

Test Mode	Test Channel	StartFre[MHz]	StopFre[MHz]	Max.Fre[MHz]	Max.Level[μW]	Limit[μW]	Verdict
DH5	2402	30	2387	86.66	0.0010	2.5	PASS
DH5	2402	2387	2400	2400.00	5.2240	25.1	PASS
DH5	2402	2483.5	2496.5	2486.14	0.0037	25.1	PASS
DH5	2402	2496.5	13000	4803.88	0.5012	2.5	PASS
DH5	2441	30	2387	124.43	0.0015	2.5	PASS
DH5	2441	2387	2400	2389.33	0.0018	25.1	PASS
DH5	2441	2483.5	2496.5	2493.17	0.0044	25.1	PASS
DH5	2441	2496.5	13000	4882.15	0.5035	2.5	PASS
DH5	2480	30	2387	165.98	0.0012	2.5	PASS
DH5	2480	2387	2400	2390.68	0.0008	25.1	PASS
DH5	2480	2483.5	2496.5	2483.51	0.0804	25.1	PASS
DH5	2480	2496.5	13000	4960.07	0.3724	2.5	PASS
2DH5	2402	30	2387	2379.45	0.0010	2.5	PASS
2DH5	2402	2387	2400	2400.00	4.7863	25.1	PASS
2DH5	2402	2483.5	2496.5	2486.13	0.0027	25.1	PASS
2DH5	2402	2496.5	13000	4804.22	0.2109	2.5	PASS
2DH5	2441	30	2387	124.43	0.0004	2.5	PASS
2DH5	2441	2387	2400	2389.07	0.0018	25.1	PASS
2DH5	2441	2483.5	2496.5	2493.03	0.0032	25.1	PASS
2DH5	2441	2496.5	13000	4881.46	0.2004	2.5	PASS
2DH5	2480	30	2387	165.98	0.0003	2.5	PASS
2DH5	2480	2387	2400	2390.28	0.0007	25.1	PASS
2DH5	2480	2483.5	2496.5	2484.99	0.1409	25.1	PASS
2DH5	2480	2496.5	13000	4959.39	0.1146	2.5	PASS
3DH5	2402	30	2387	2379.45	0.0014	2.5	PASS
3DH5	2402	2387	2400	2399.98	4.8195	25.1	PASS
3DH5	2402	2483.5	2496.5	2491.31	0.0026	25.1	PASS
3DH5	2402	2496.5	13000	4803.88	0.3491	2.5	PASS
3DH5	2441	30	2387	124.43	0.0009	2.5	PASS
3DH5	2441	2387	2400	2389.28	0.0015	25.1	PASS


3DH5	2441	2483.5	2496.5	2493.20	0.0037	25.1	PASS
3DH5	2441	2496.5	13000	4882.49	0.1652	2.5	PASS
3DH5	2480	30	2387	165.98	0.0003	2.5	PASS
3DH5	2480	2387	2400	2398.30	0.0006	25.1	PASS
3DH5	2480	2483.5	2496.5	2483.58	0.2559	25.1	PASS
3DH5	2480	2496.5	13000	4959.73	0.2009	2.5	PASS

Spurious Emissions of Tx_TNVN_DH5_2402_Ant1

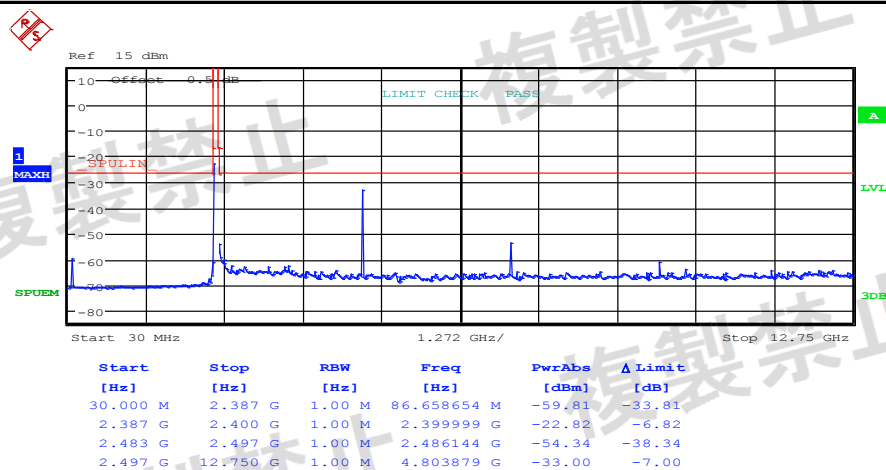


Date: 24.OCT.2018 12:02:39

Spurious Emissions of Tx_TNVN_DH5_2441_Ant1

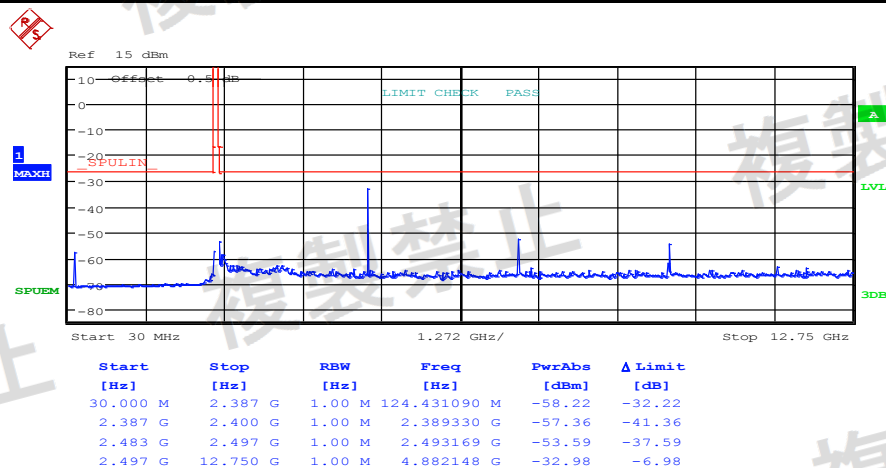


Date: 24.OCT.2018 12:03:58

Spurious Emissions of Tx_TNVN_DH5_2480_Ant1

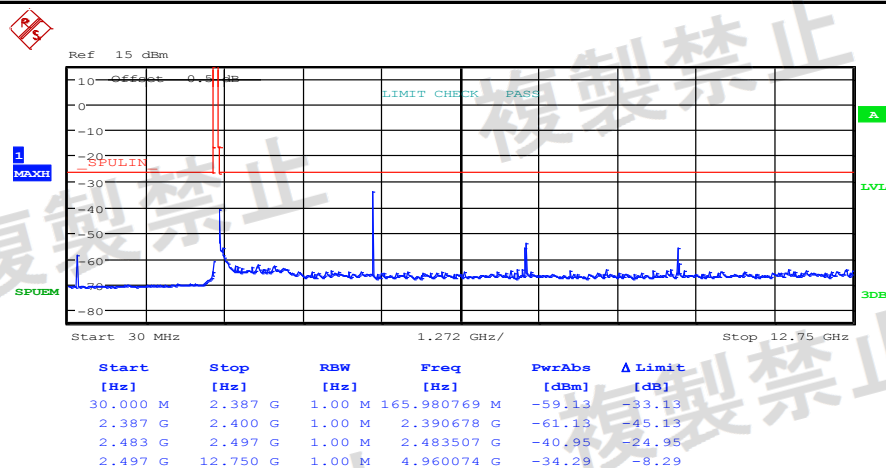


Date: 24.OCT.2018 12:05:19

Spurious Emissions of Tx_TNVN_2DH5_2402_Ant1

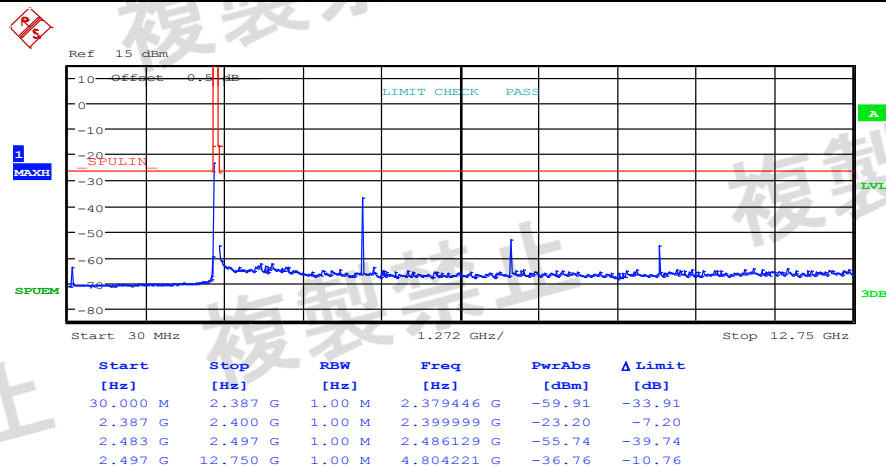


Date: 24.OCT.2018 12:06:54

Spurious Emissions of Tx_TNVN_2DH5_2441_Ant1

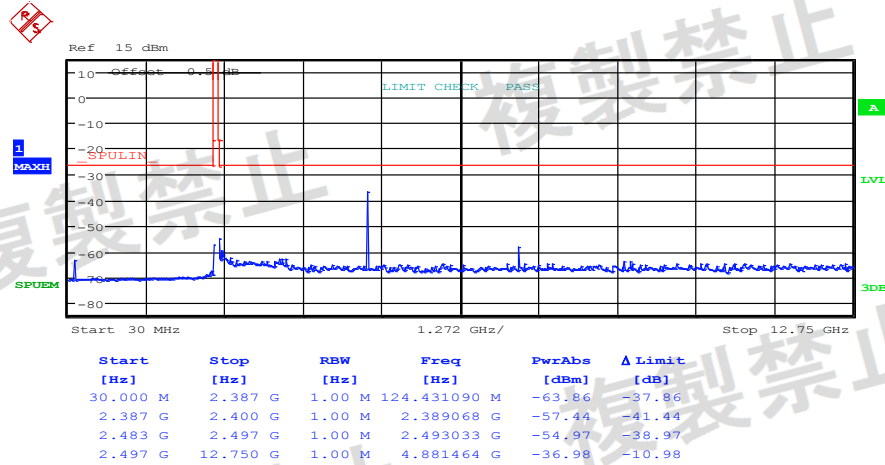


Date: 24.OCT.2018 12:08:12

Spurious Emissions of Tx_TNVN_2DH5_2480_Ant1

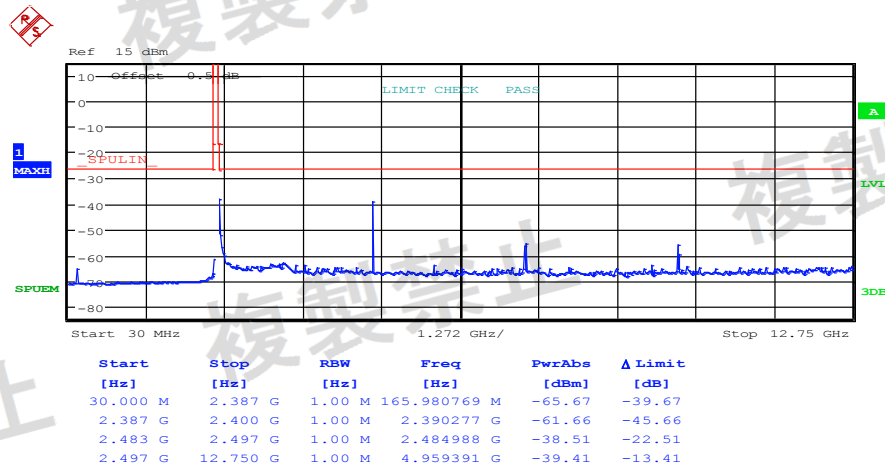


Date: 24.OCT.2018 12:09:32

Spurious Emissions of Tx_TNVN_3DH5_2402_Ant1

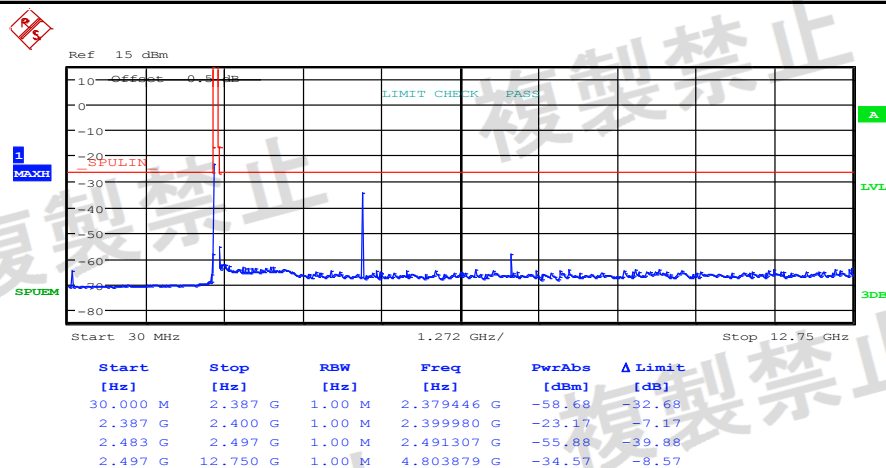


Date: 24.OCT.2018 12:10:58

Spurious Emissions of Tx_TNVN_3DH5_2441_Ant1

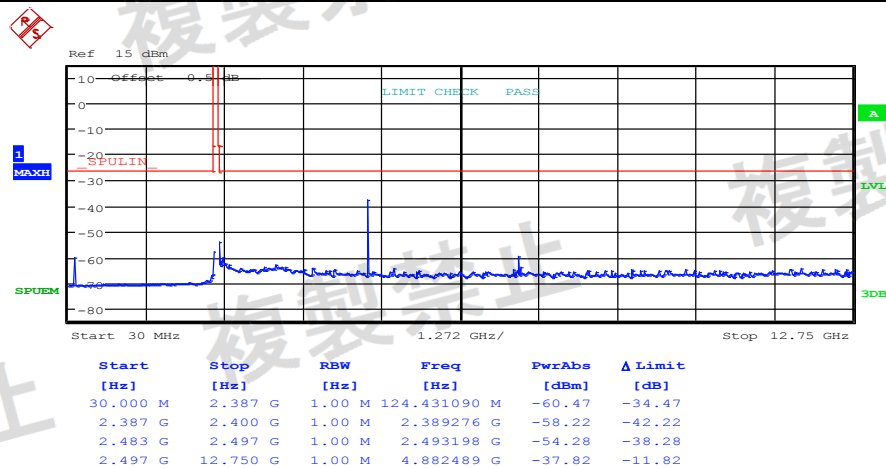

Date: 24.OCT.2018 12:12:17

Spurious Emissions of Tx_TNVN_3DH5_2480_Ant1

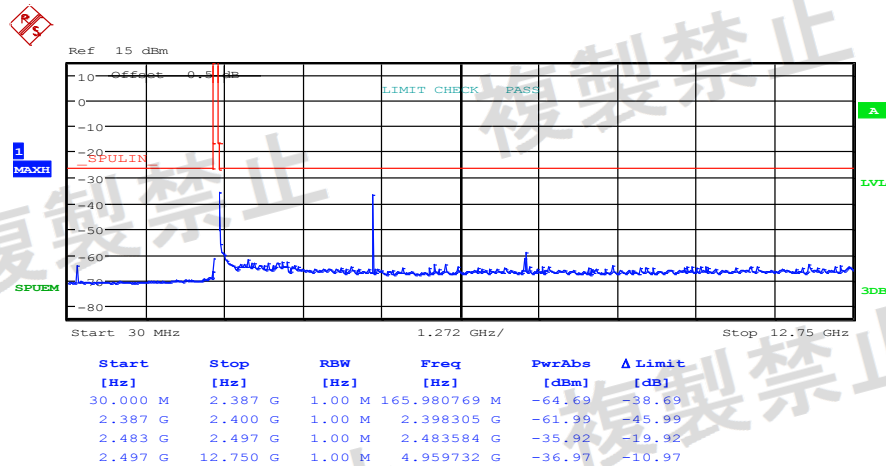


Date: 24.OCT.2018 12:13:42

6.Spurious Emissions of Rx


Test Mode	Test Channel	StartFre[MHz]	StopFre[MHz]	Max.Fre[MHz]	Max.Level[nW]	Limit[nW]	Verdict
DH5	2402	1000	13000	9613.93	2.089	20	PASS
DH5	2402	30	1000	328.46	0.036	4	PASS
DH5	2441	1000	13000	9773.72	1.710	20	PASS
DH5	2441	30	1000	741.96	0.032	4	PASS
DH5	2480	1000	13000	9926.47	2.118	20	PASS
DH5	2480	30	1000	30.00	0.035	4	PASS

Spurious Emissions of Rx_TNVN_DH5_2402_Ant1

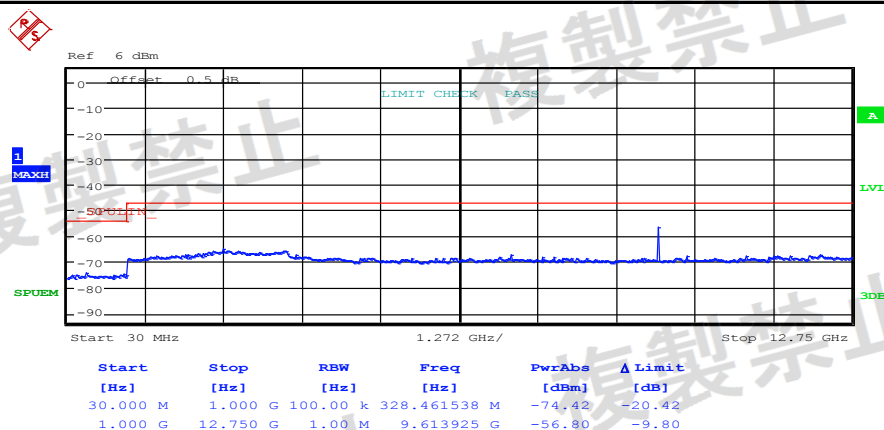


Date: 24.OCT.2018 12:16:55

Spurious Emissions of Rx_TNVN_DH5_2441_Ant1

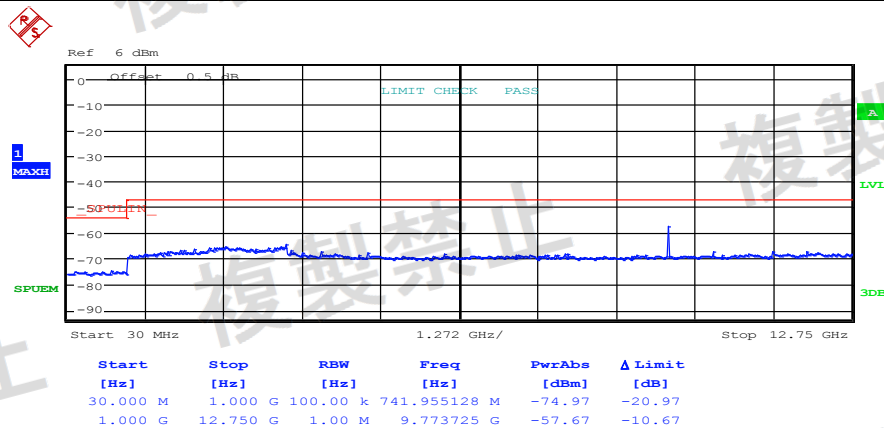

Date: 24.OCT.2018 12:17:25

Spurious Emissions of Rx_TNVN_DH5_2480_Ant1

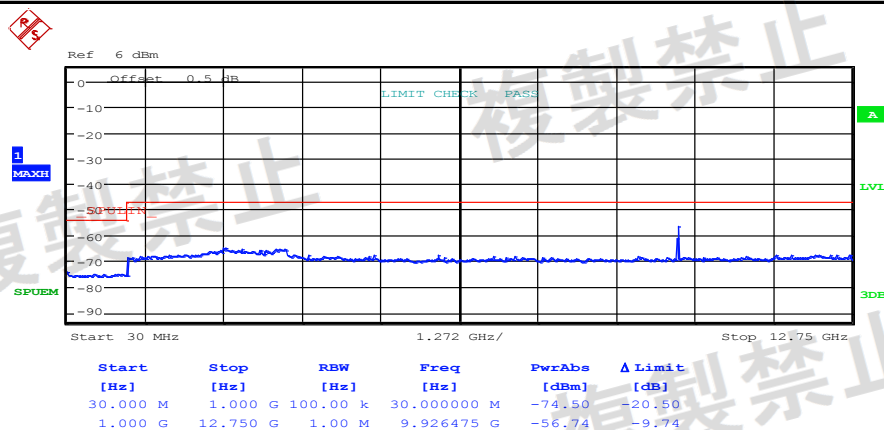

Date: 24.OCT.2018 12:17:49

7.Dwell Time



Test Condition	Test Mode	Test Channel	Ant	Burst Width[ms]	Dwell Time[s]	Limit[s]	Verdict
TNVN	DH5	2402	Ant1	2.90	0.21	<0.4	PASS
TNVN	DH5	2441	Ant1	2.90	0.21	<0.4	PASS
TNVN	DH5	2480	Ant1	2.90	0.21	<0.4	PASS
TNVN	2DH5	2402	Ant1	2.90	0.21	<0.4	PASS
TNVN	2DH5	2441	Ant1	2.92	0.21	<0.4	PASS
TNVN	2DH5	2480	Ant1	2.92	0.21	<0.4	PASS
TNVN	3DH5	2402	Ant1	2.90	0.21	<0.4	PASS
TNVN	3DH5	2441	Ant1	2.90	0.21	<0.4	PASS
TNVN	3DH5	2480	Ant1	2.90	0.21	<0.4	PASS



Total Dwell Time shall be calculated by the following formula:



Total Dwell Time = (0.4 x Spreading Rate x Transmit ON Time) / (Burst Cycle x Number of Hopping Channels)



Remark:


- Spreading Rate = Spread Bandwidth (measured value) / Transmission Rate
- Transmit ON Time and Burst Cycle are both measured in Seconds
- Numerical Coefficient (0.4) is a dimensionless number defined in the technical standard.

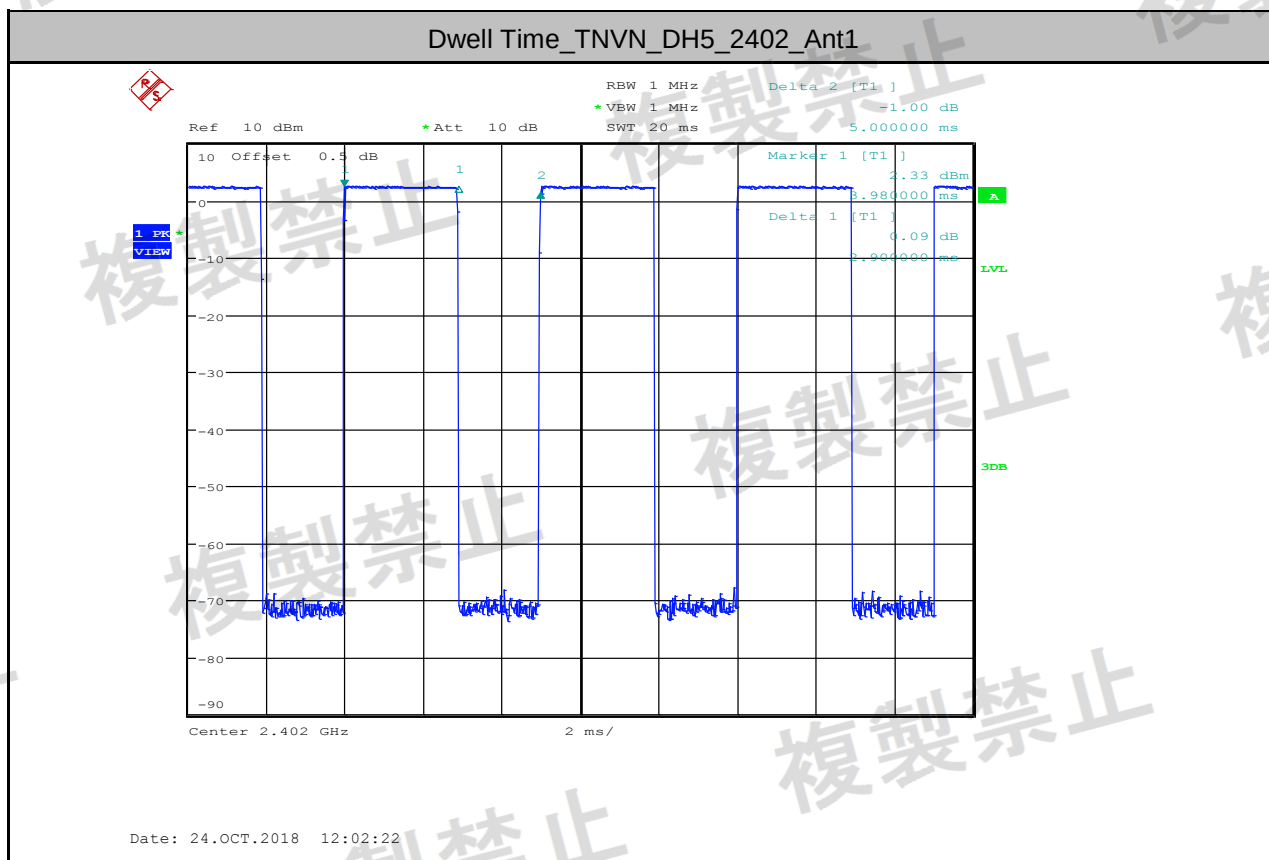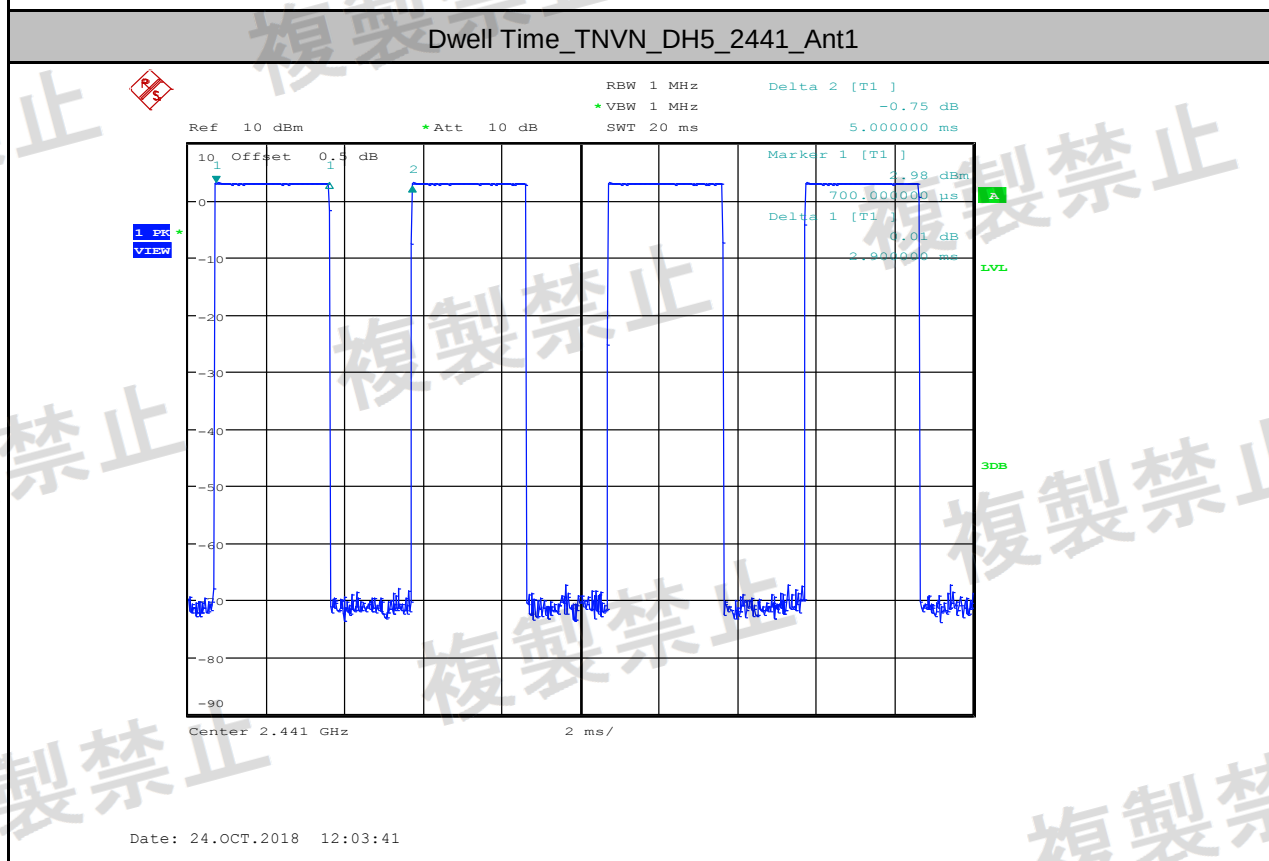

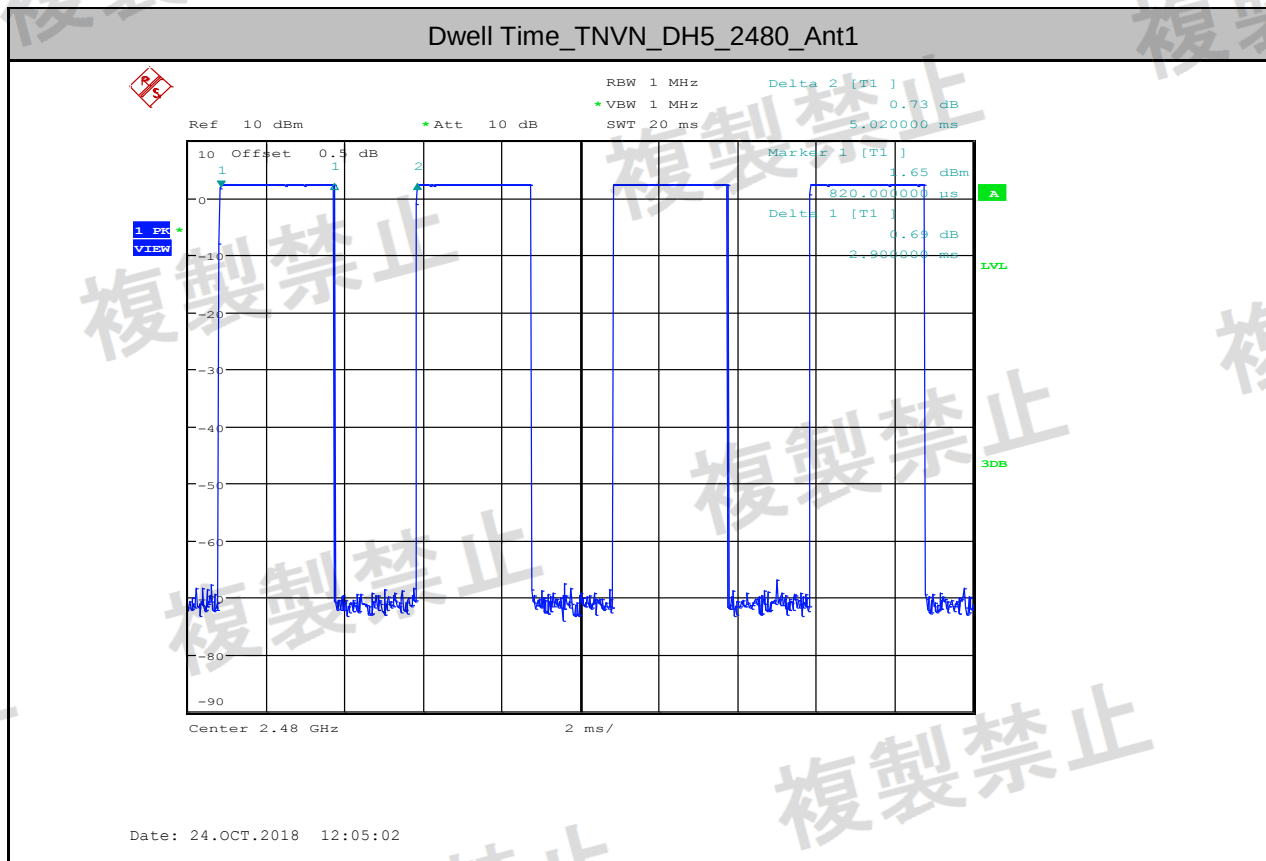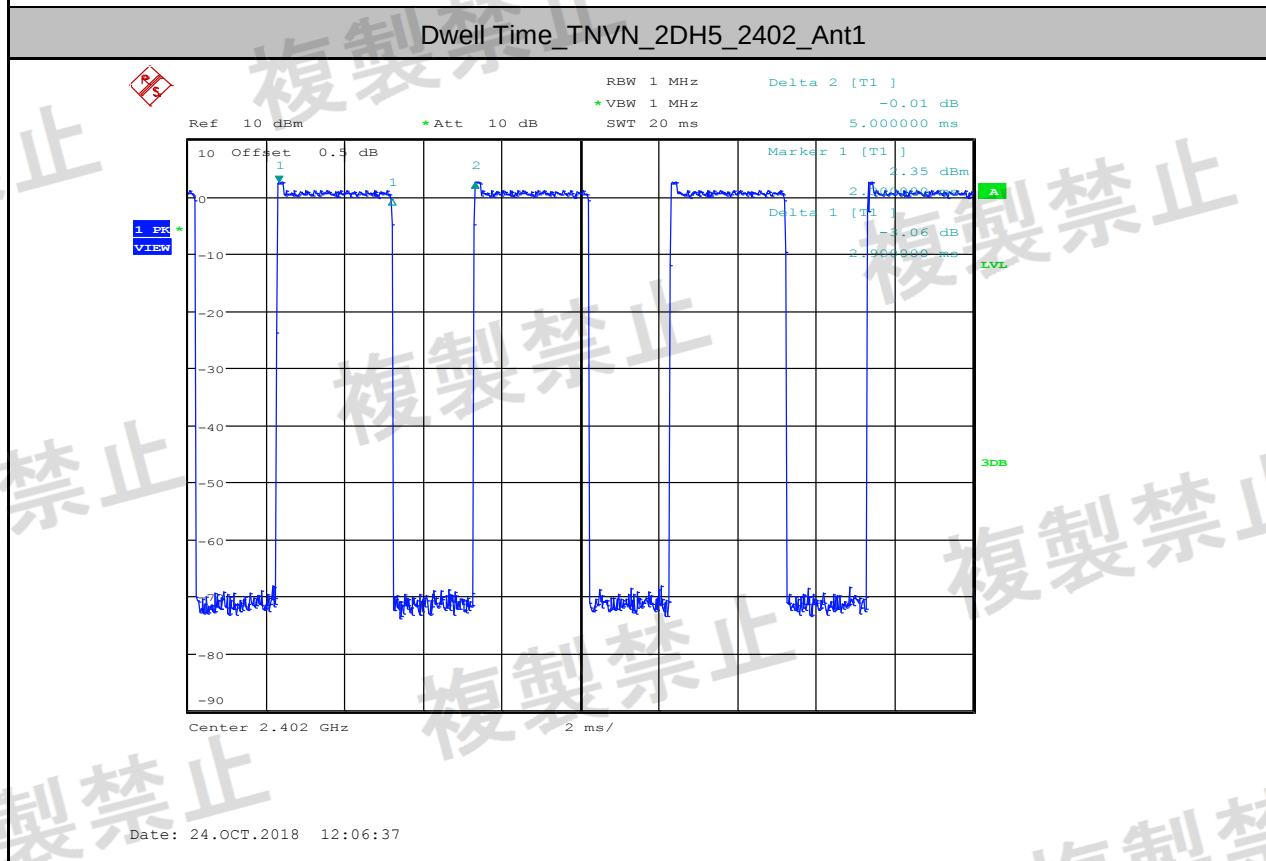

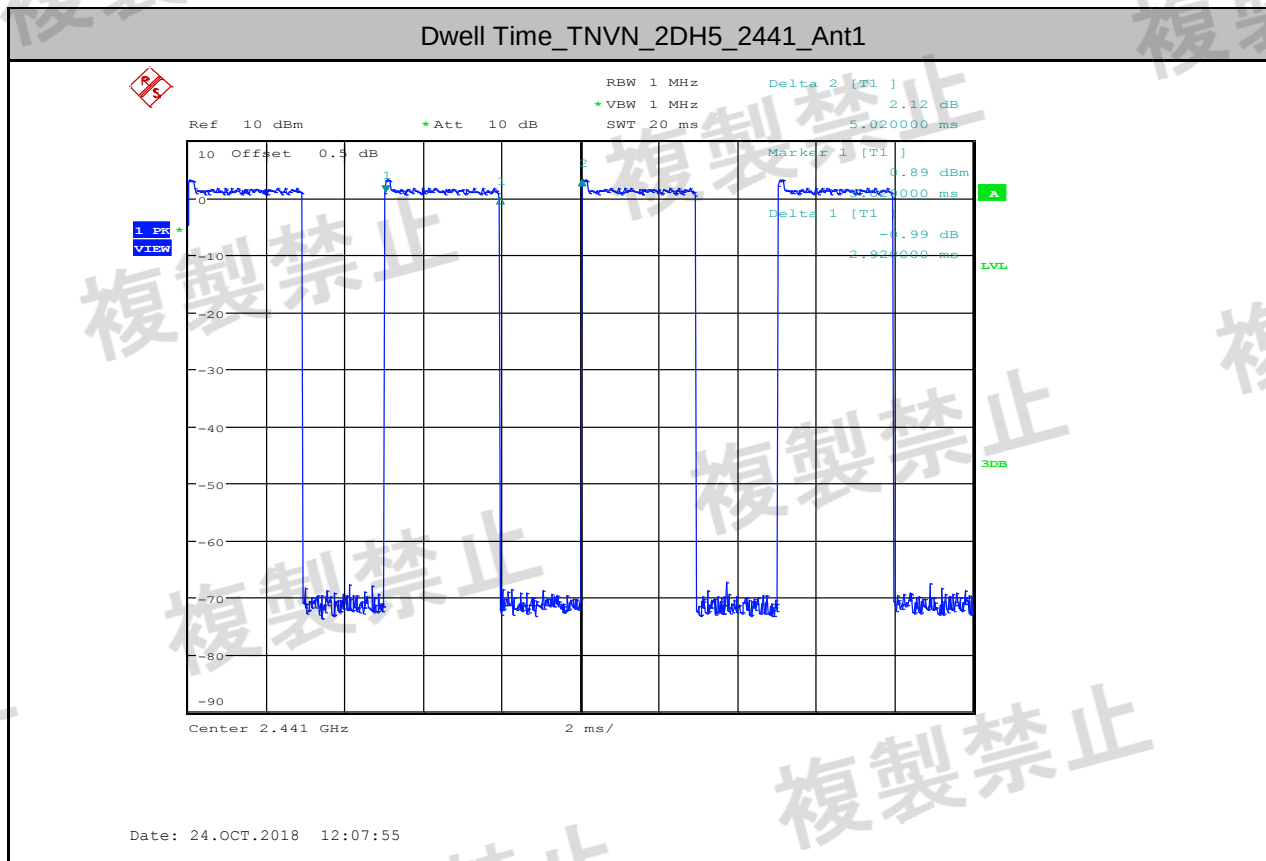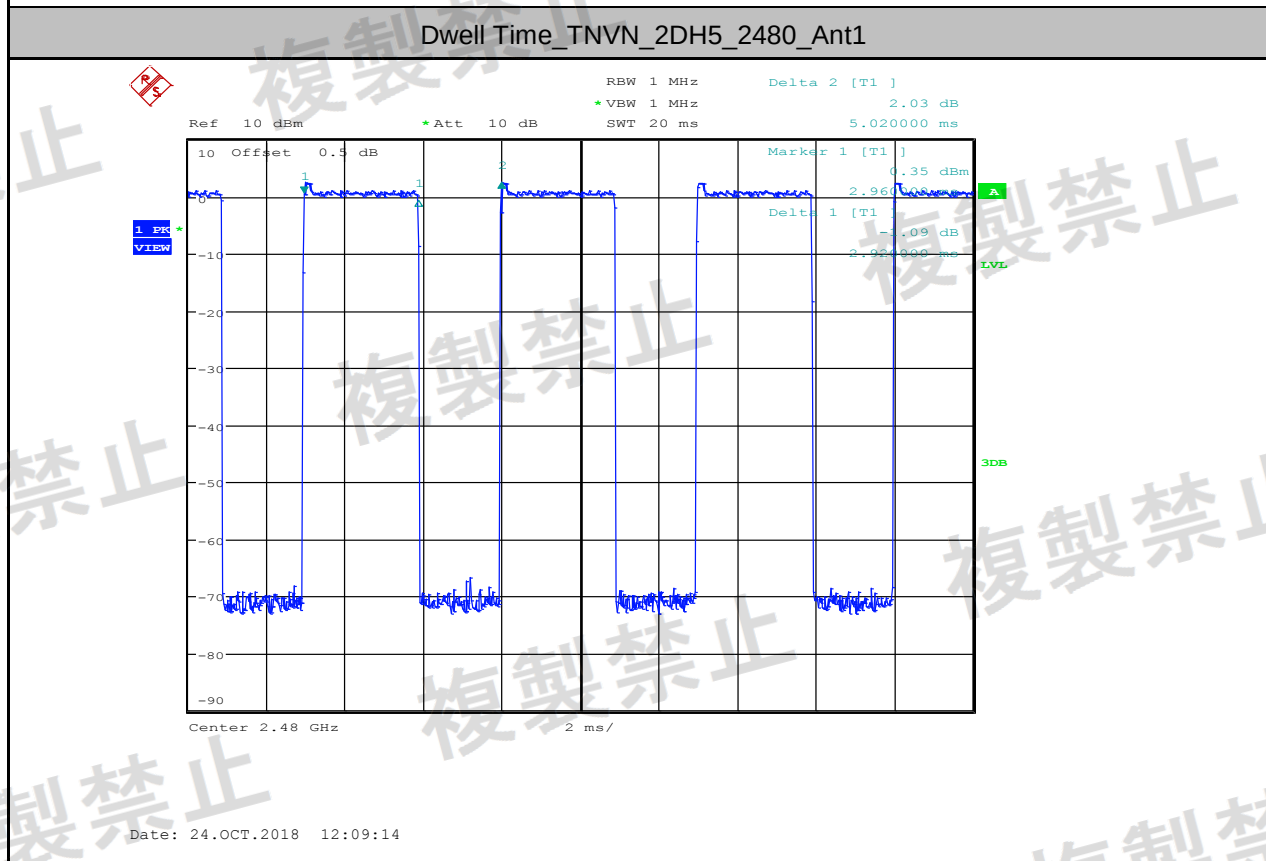

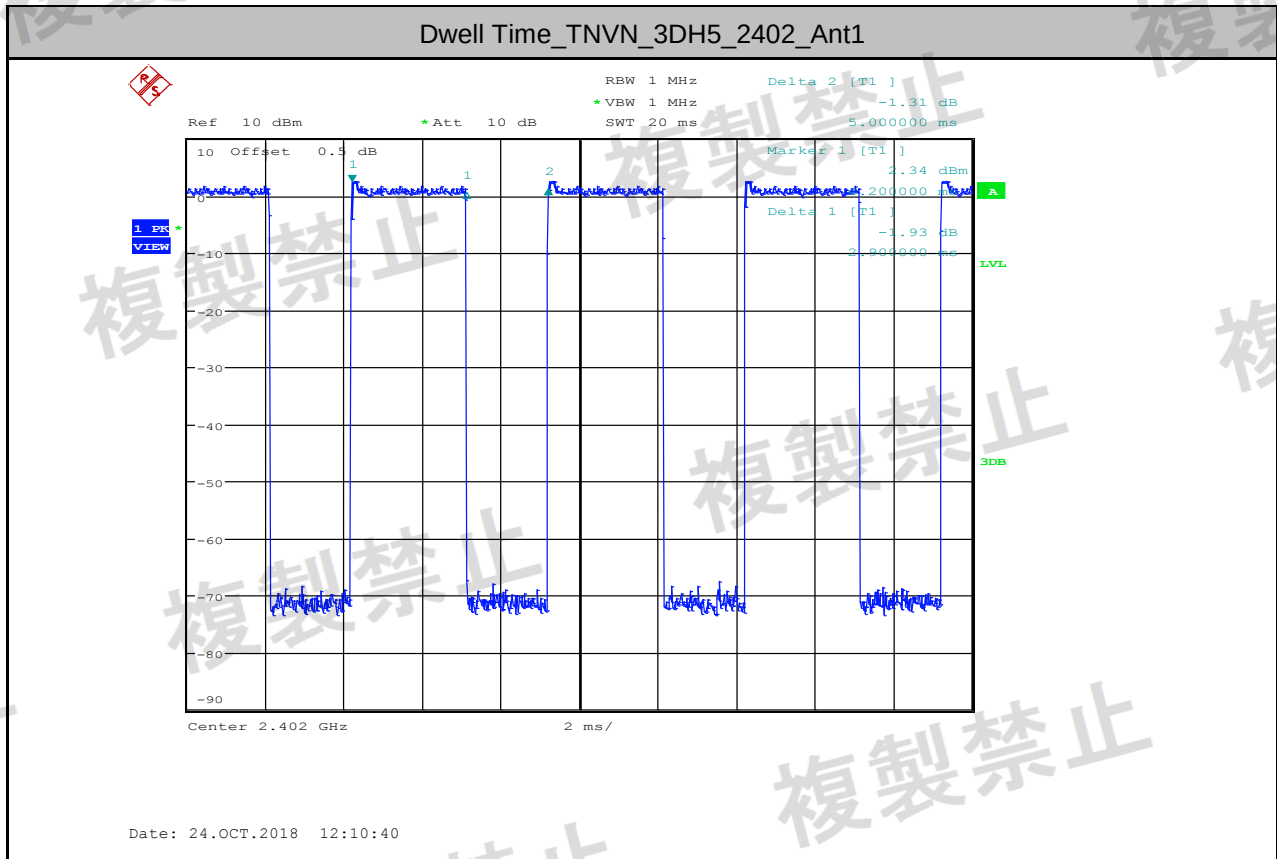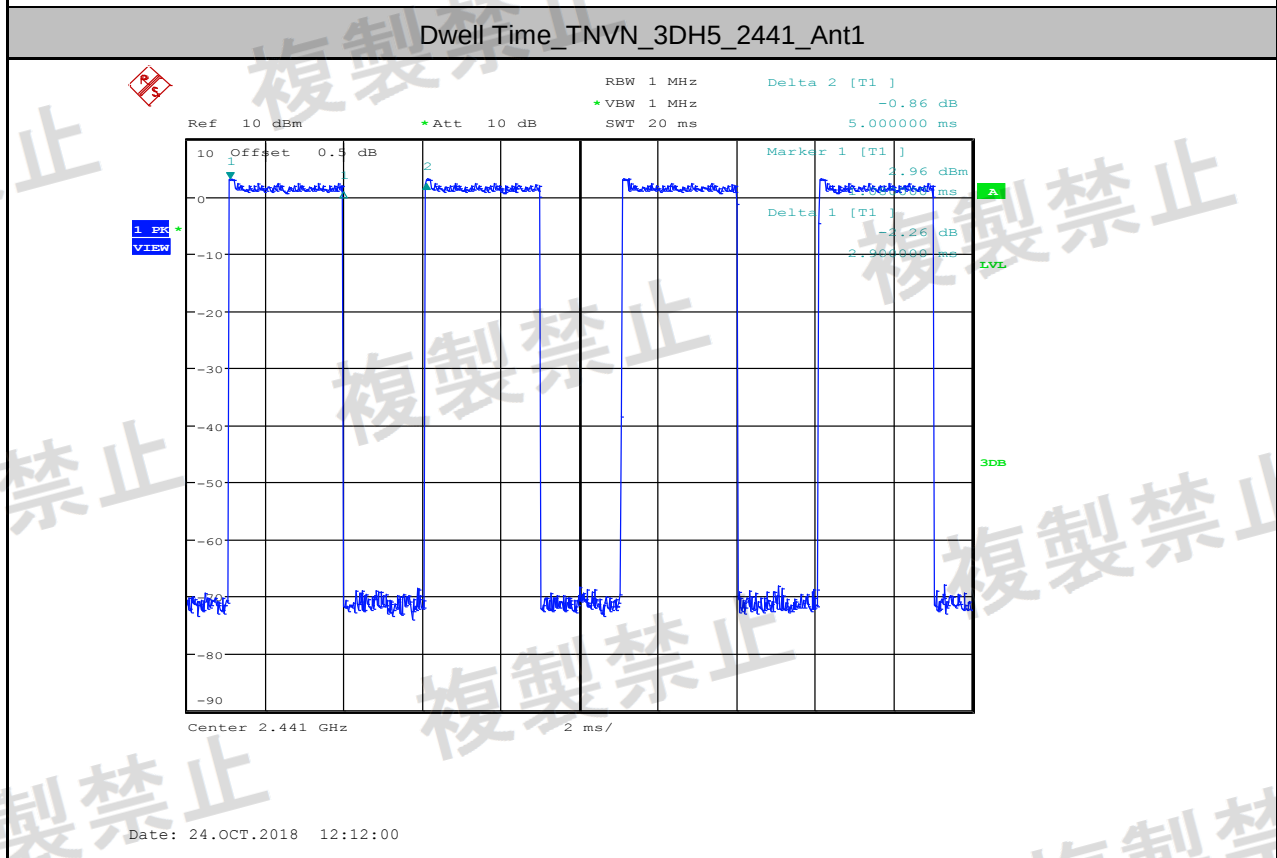

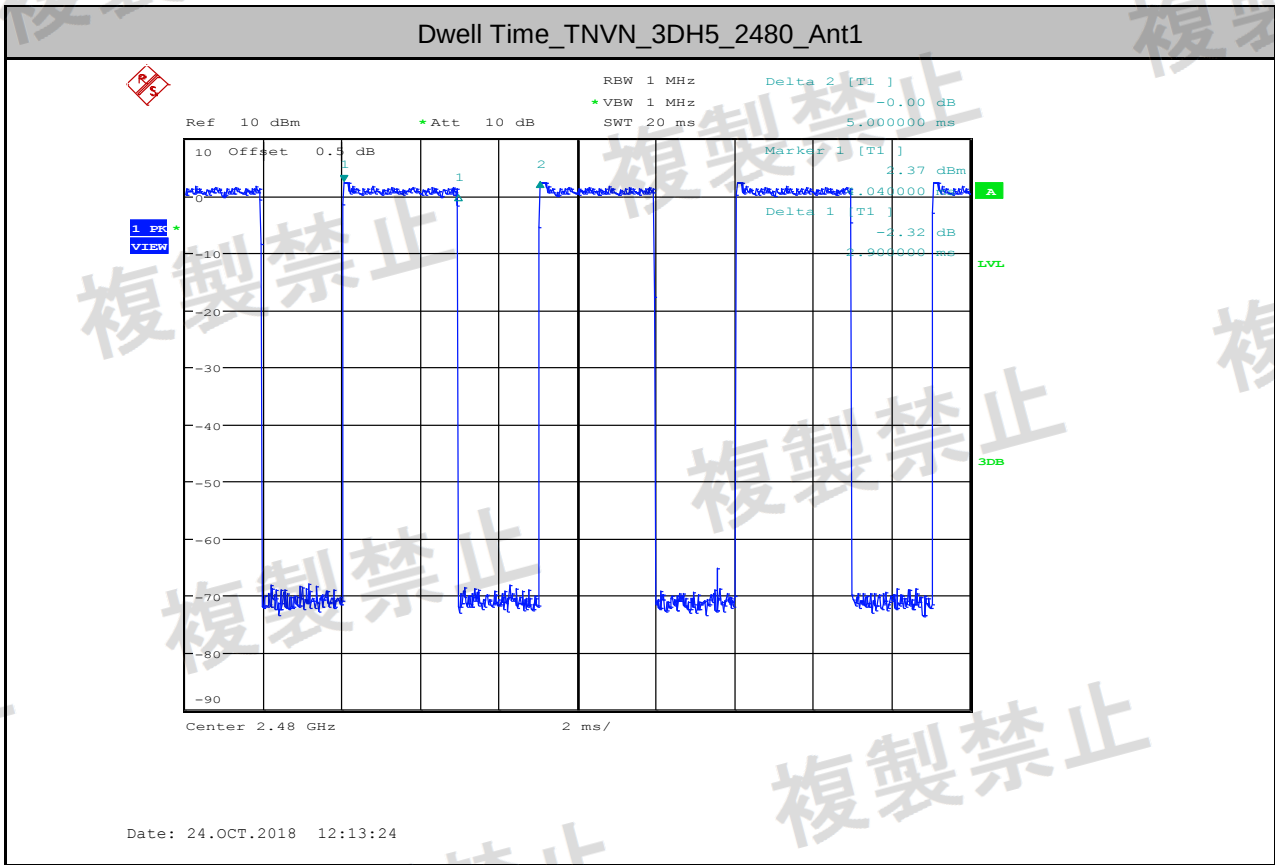

- End of the Report -