


Site: AC1	Time: 2018/06/30 - 00:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

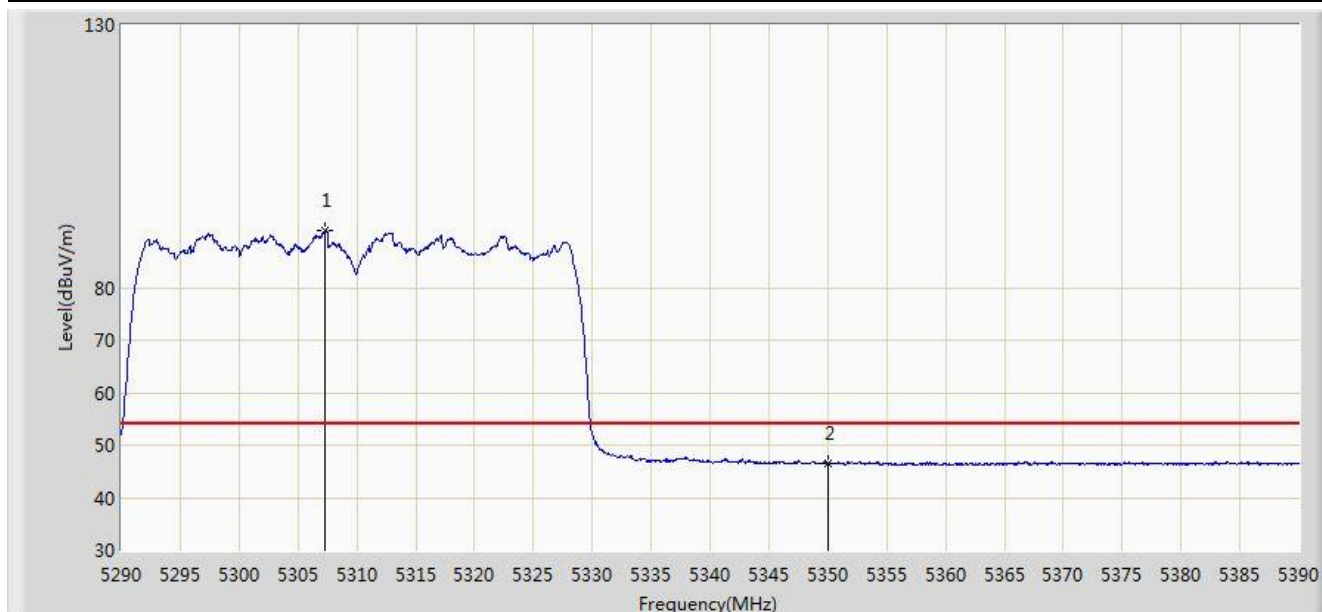


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.300	90.780	86.955	N/A	N/A	3.825	AV
2			5350.000	46.481	42.576	-7.519	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

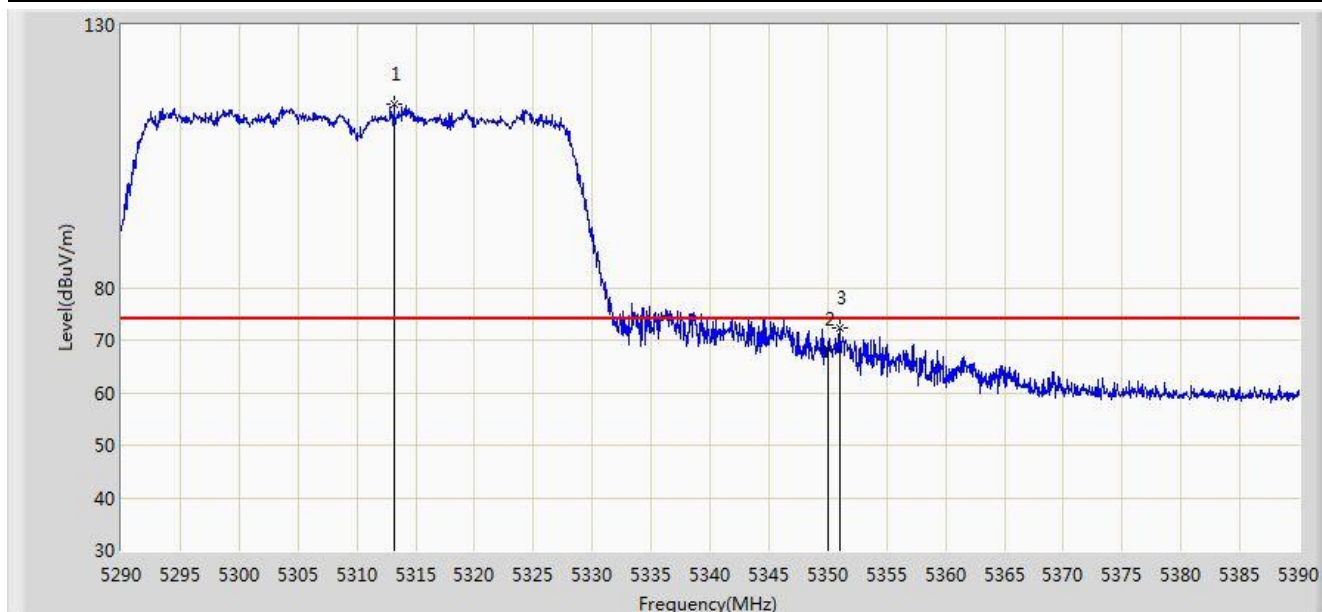


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.150	114.998	111.162	N/A	N/A	3.835	PK
2			5350.000	68.376	64.471	-5.624	74.000	3.904	PK
3			5351.000	72.280	68.373	-1.720	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

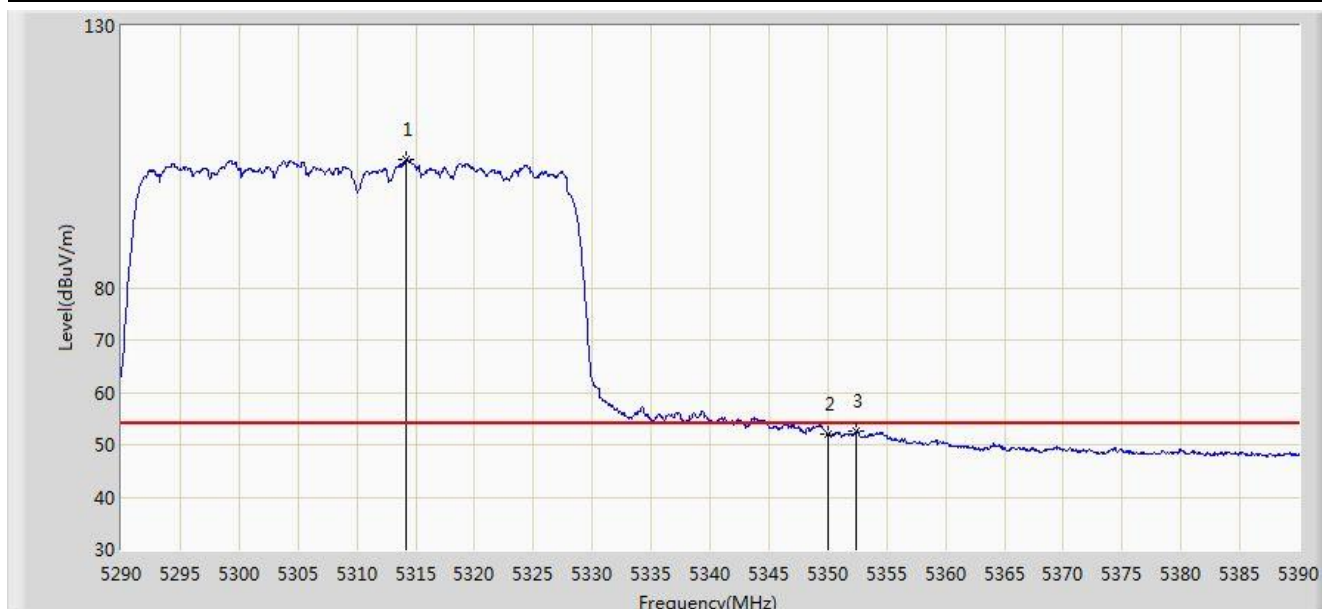


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.200	104.451	100.613	N/A	N/A	3.838	AV
2			5350.000	52.027	48.122	-1.973	54.000	3.904	AV
3			5352.450	52.611	48.702	-1.389	54.000	3.909	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

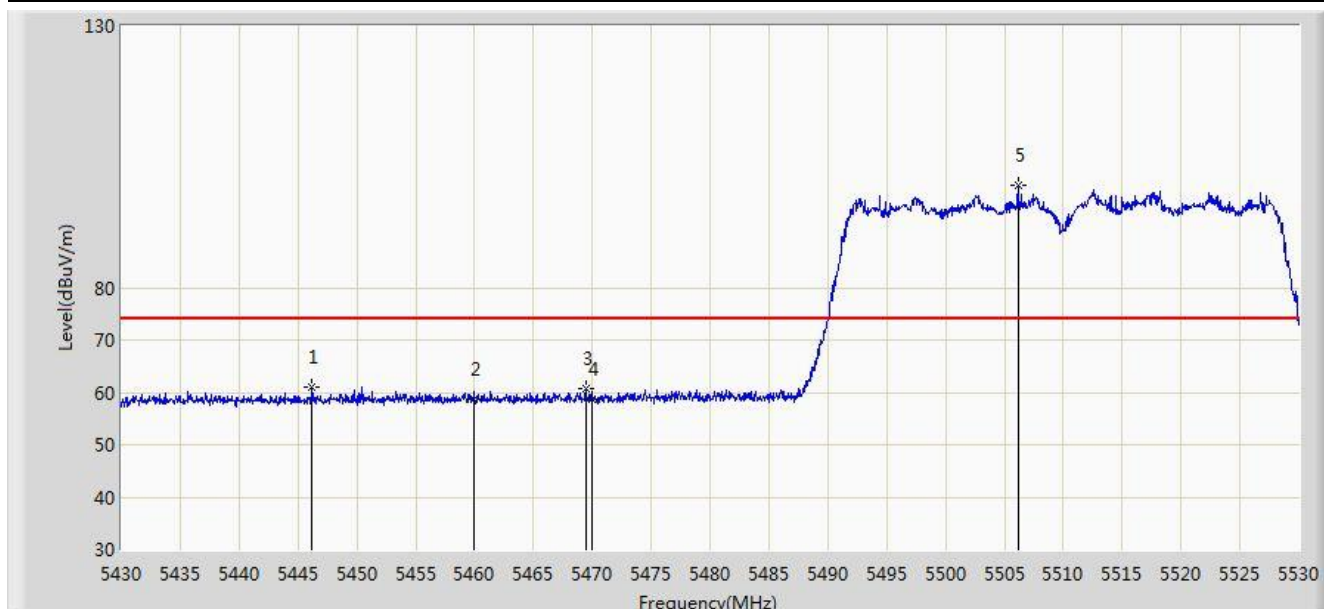


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.200	61.127	56.984	-12.873	74.000	4.142	PK
2			5460.000	58.806	54.626	-15.194	74.000	4.180	PK
3			5469.450	60.587	56.386	-7.613	68.200	4.201	PK
4			5470.000	58.713	54.511	-9.487	68.200	4.202	PK
5		*	5506.150	99.442	95.152	N/A	N/A	4.289	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

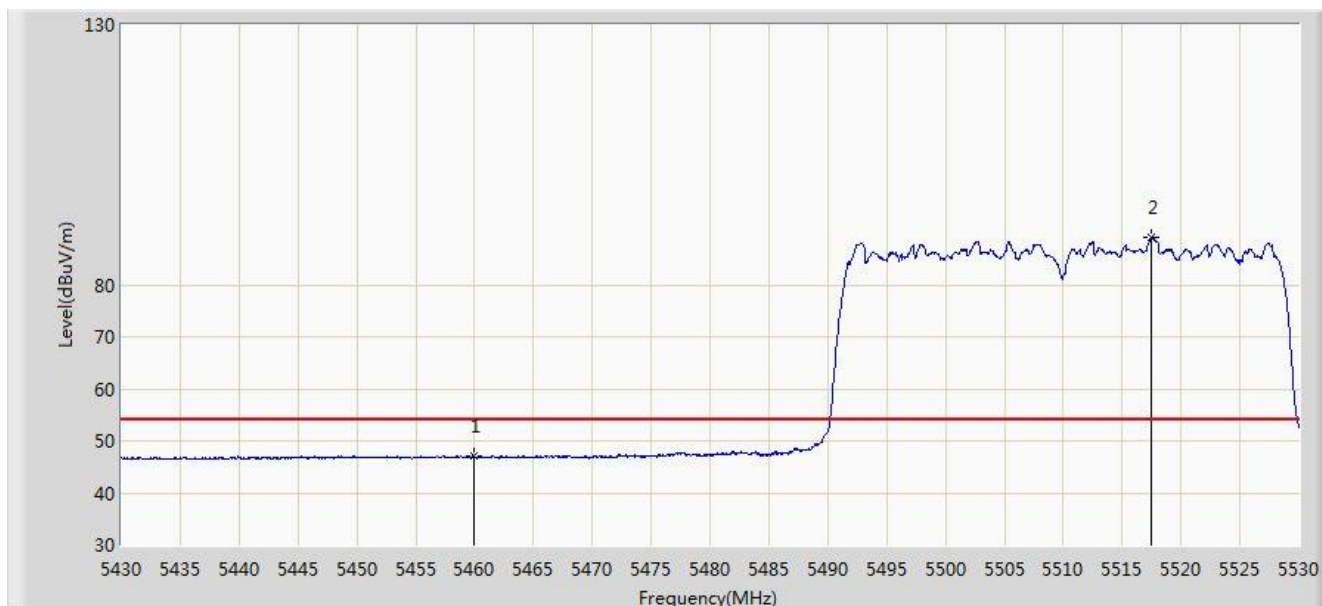


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.072	42.892	-6.928	54.000	4.180	AV
2		*	5517.500	89.229	84.906	N/A	N/A	4.323	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

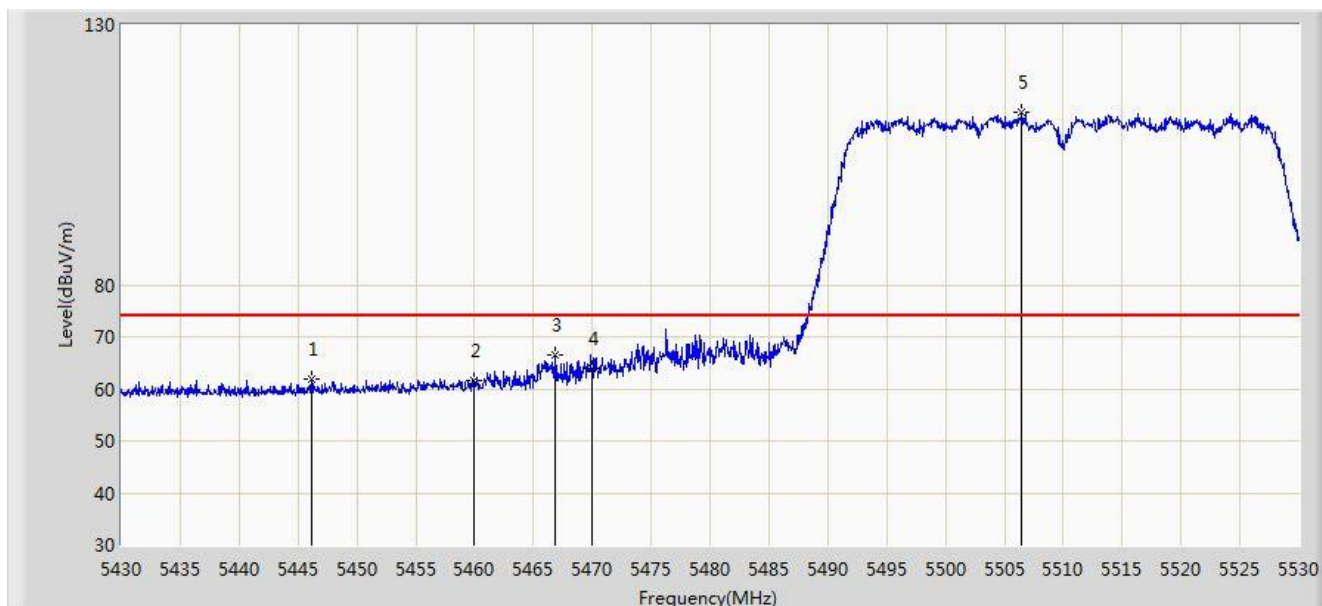


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.150	61.870	57.727	-12.130	74.000	4.142	PK
2			5460.000	61.485	57.305	-12.515	74.000	4.180	PK
3			5466.900	66.382	62.187	-1.818	68.200	4.196	PK
4			5470.000	63.782	59.580	-4.418	68.200	4.202	PK
5		*	5506.500	113.295	109.004	N/A	N/A	4.292	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

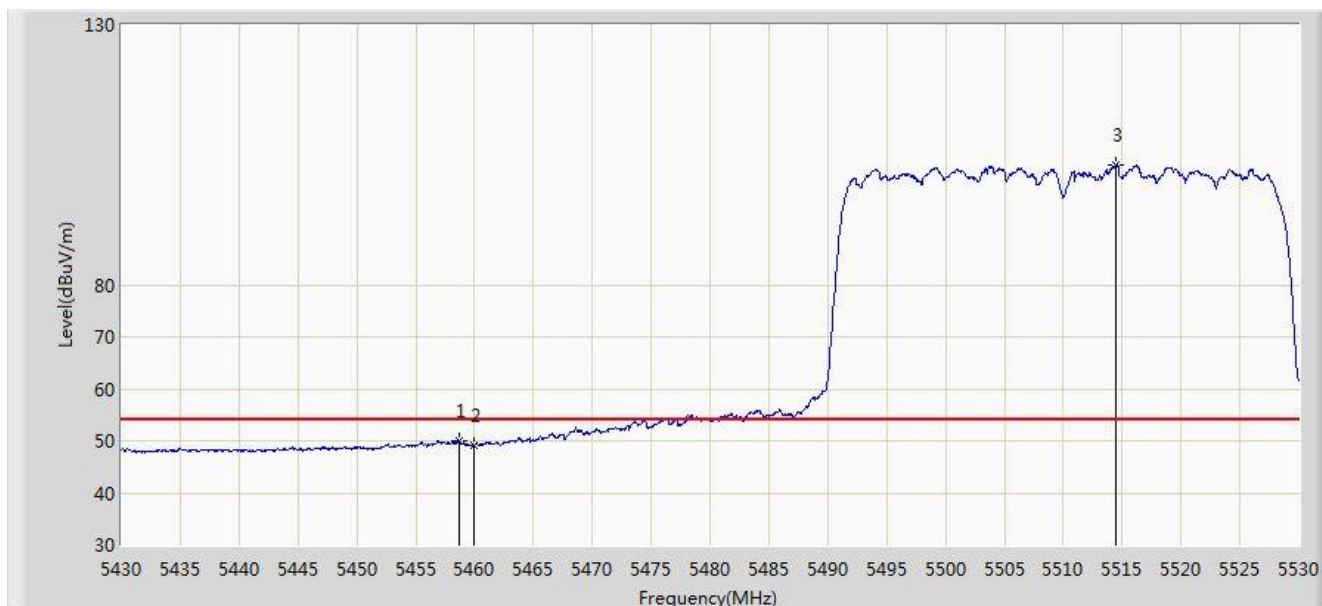


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.700	50.058	45.880	-3.942	54.000	4.178	AV
2			5460.000	49.138	44.958	-4.862	54.000	4.180	AV
3		*	5514.450	103.079	98.765	N/A	N/A	4.313	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

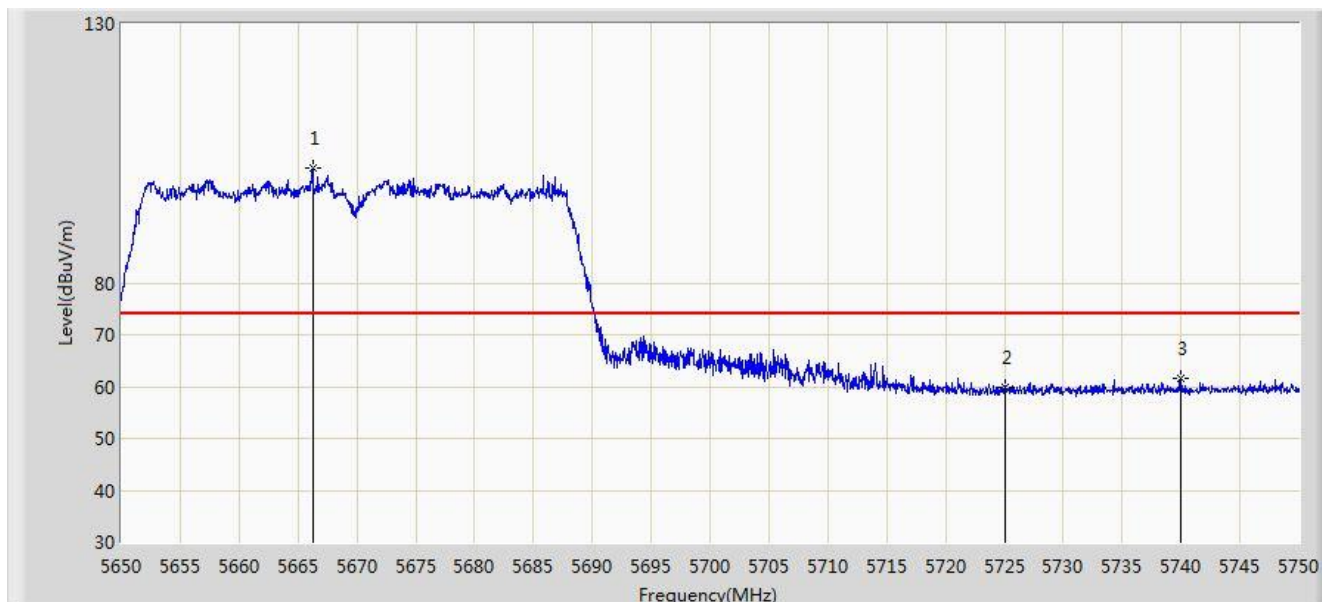


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5666.250	102.126	97.394	N/A	N/A	4.732	PK
2			5725.000	59.726	54.697	-14.274	74.000	5.029	PK
3			5740.000	61.658	56.533	-12.342	74.000	5.125	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

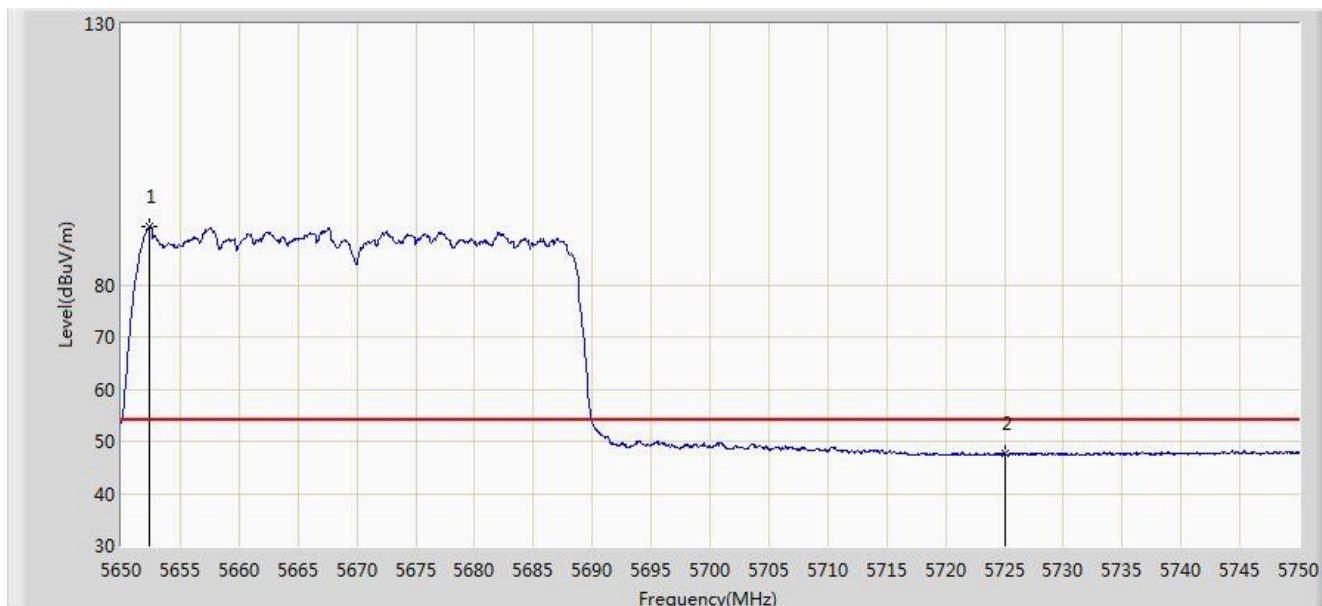


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5652.350	91.116	86.437	N/A	N/A	4.679	AV
2			5725.000	47.711	42.682	-6.289	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

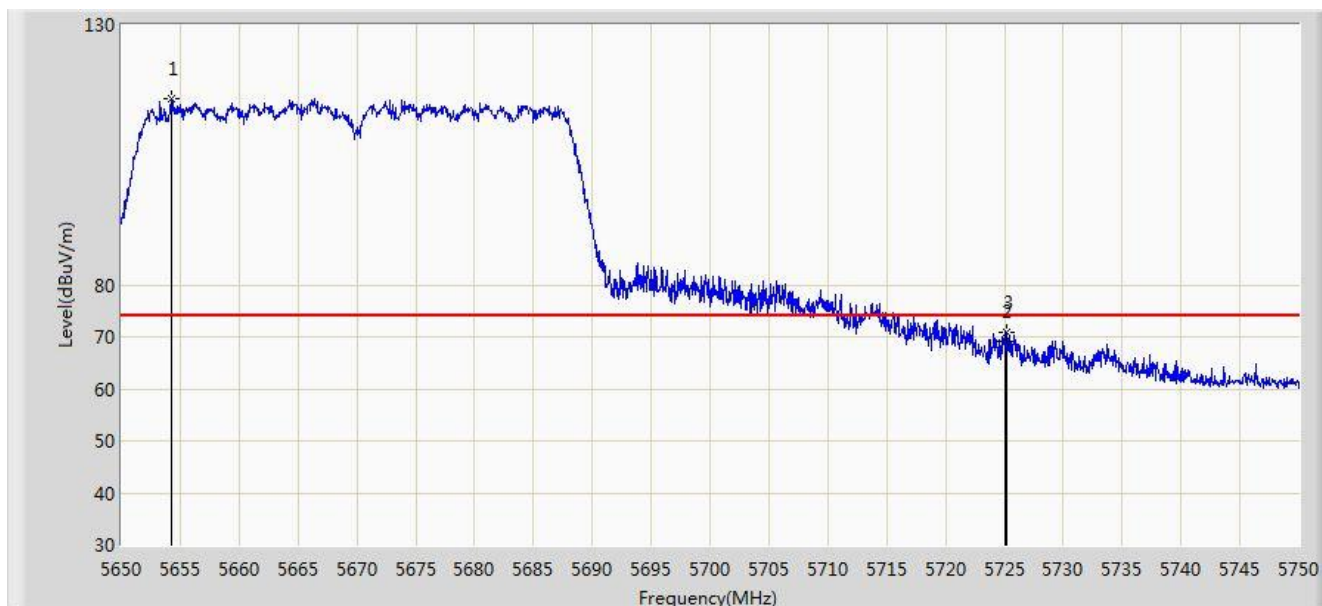


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5654.200	115.755	111.070	N/A	N/A	4.685	PK
2			5725.000	69.182	64.153	-4.818	74.000	5.029	PK
3			5725.250	70.764	65.733	-3.236	74.000	5.030	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

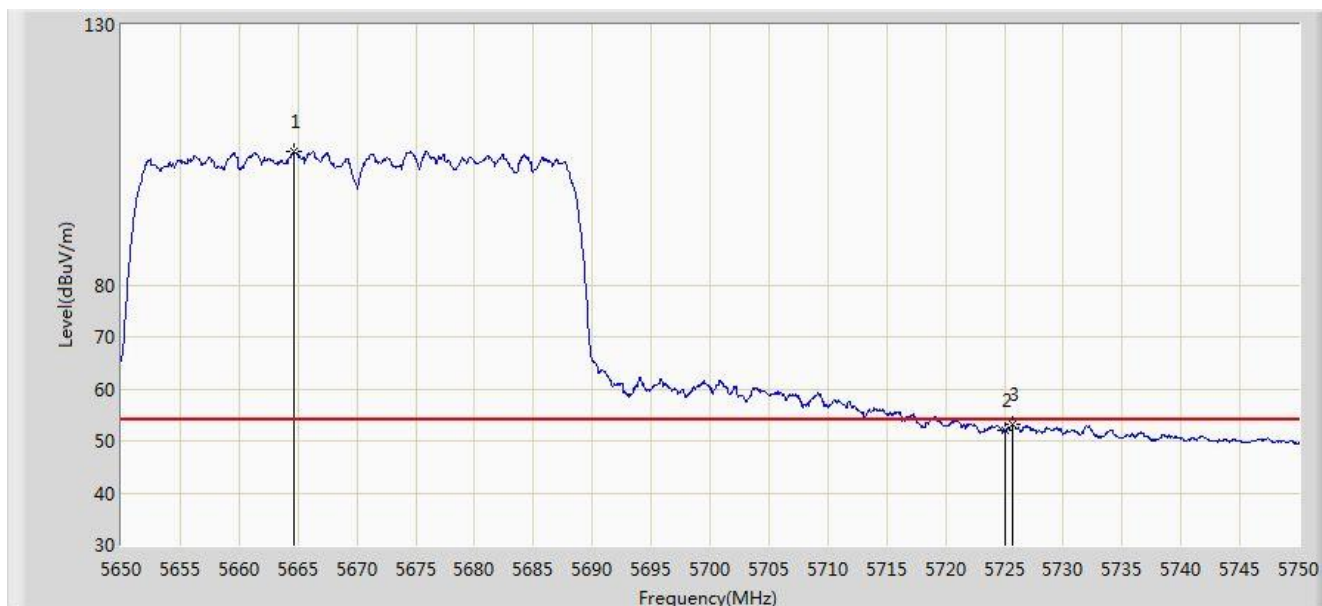


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5664.650	105.643	100.917	N/A	N/A	4.726	AV
2			5725.000	51.957	46.928	-2.043	54.000	5.029	AV
3			5725.700	53.275	48.241	-0.725	54.000	5.033	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5755MHz	

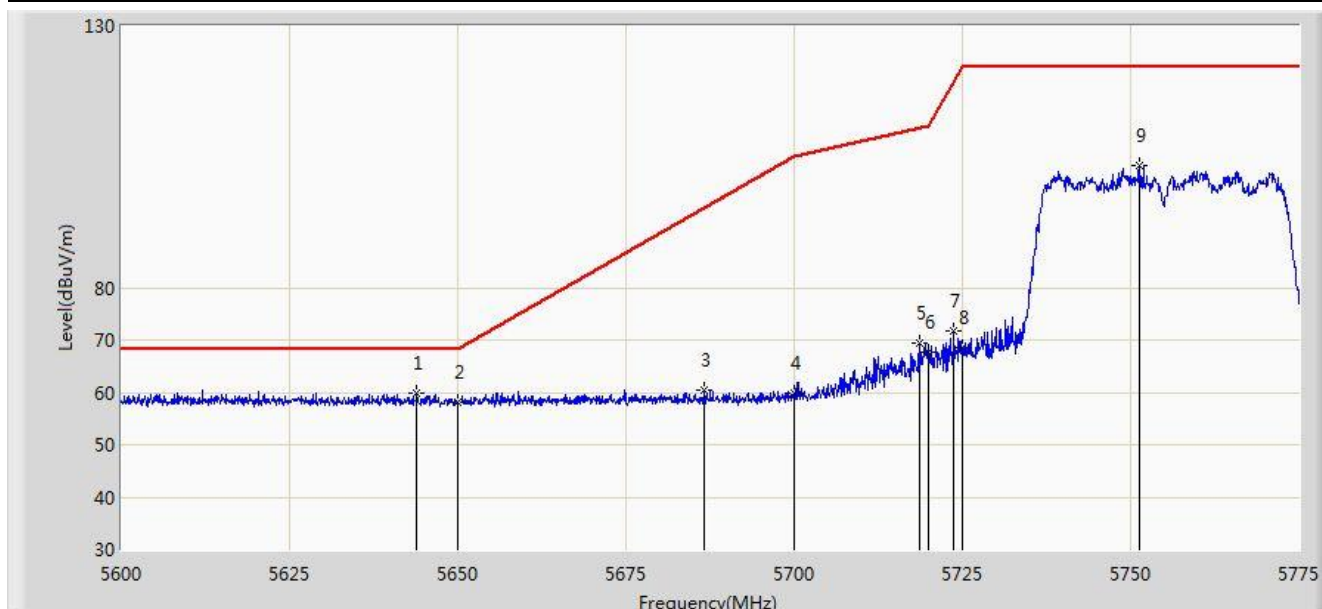


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.837	59.972	55.322	-8.228	68.200	4.651	PK
2			5650.000	57.985	53.314	-10.215	68.200	4.671	PK
3			5686.712	60.310	55.496	-35.088	95.399	4.815	PK
4			5700.000	59.924	55.046	-45.276	105.200	4.878	PK
5			5718.562	69.374	64.386	-41.024	110.398	4.988	PK
6			5720.000	67.693	62.696	-43.107	110.800	4.997	PK
7			5723.725	71.613	66.592	-47.681	119.294	5.021	PK
8			5725.000	68.431	63.402	-53.769	122.200	5.029	PK
9			5751.288	103.468	98.277	N/A	N/A	5.191	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5755MHz	

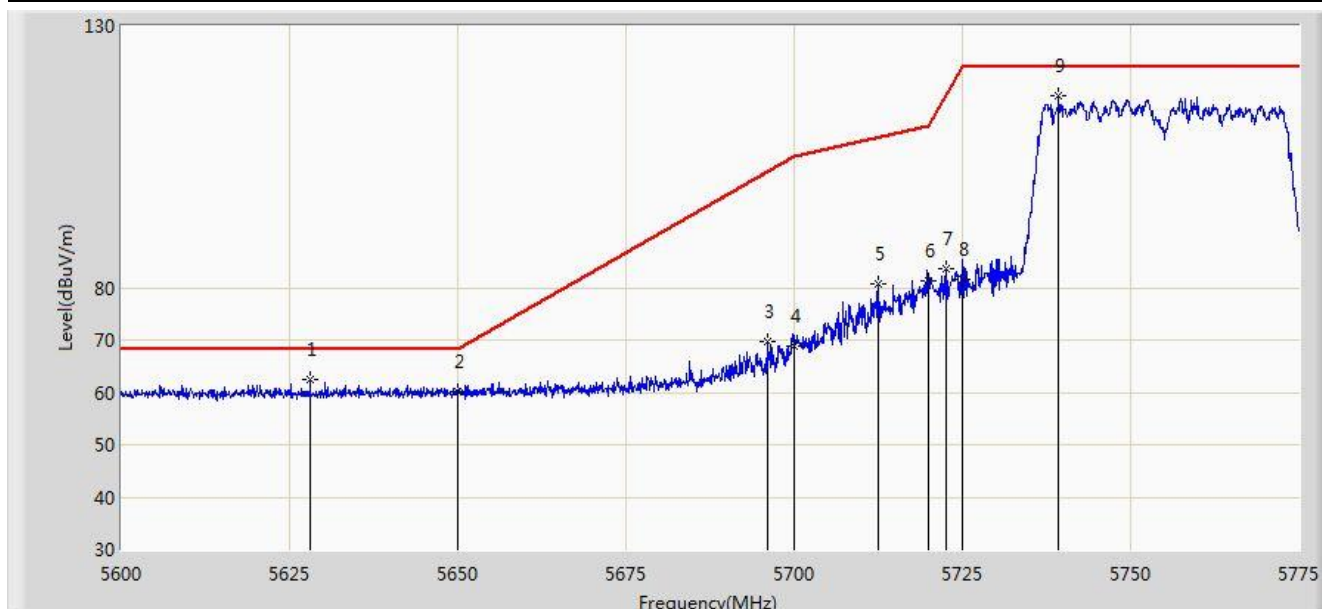


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5628.087	62.557	57.953	-5.643	68.200	4.604	PK
2			5650.000	60.043	55.372	-8.157	68.200	4.671	PK
3			5695.987	69.670	64.813	-32.572	102.242	4.857	PK
4			5700.000	68.864	63.986	-36.336	105.200	4.878	PK
5			5712.437	80.582	75.634	-28.102	108.685	4.948	PK
6			5720.000	81.356	76.359	-29.444	110.800	4.997	PK
7			5722.675	83.683	78.669	-33.217	116.900	5.014	PK
8			5725.000	81.607	76.578	-40.593	122.200	5.029	PK
9		*	5739.300	116.692	111.572	N/A	N/A	5.120	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5795MHz	

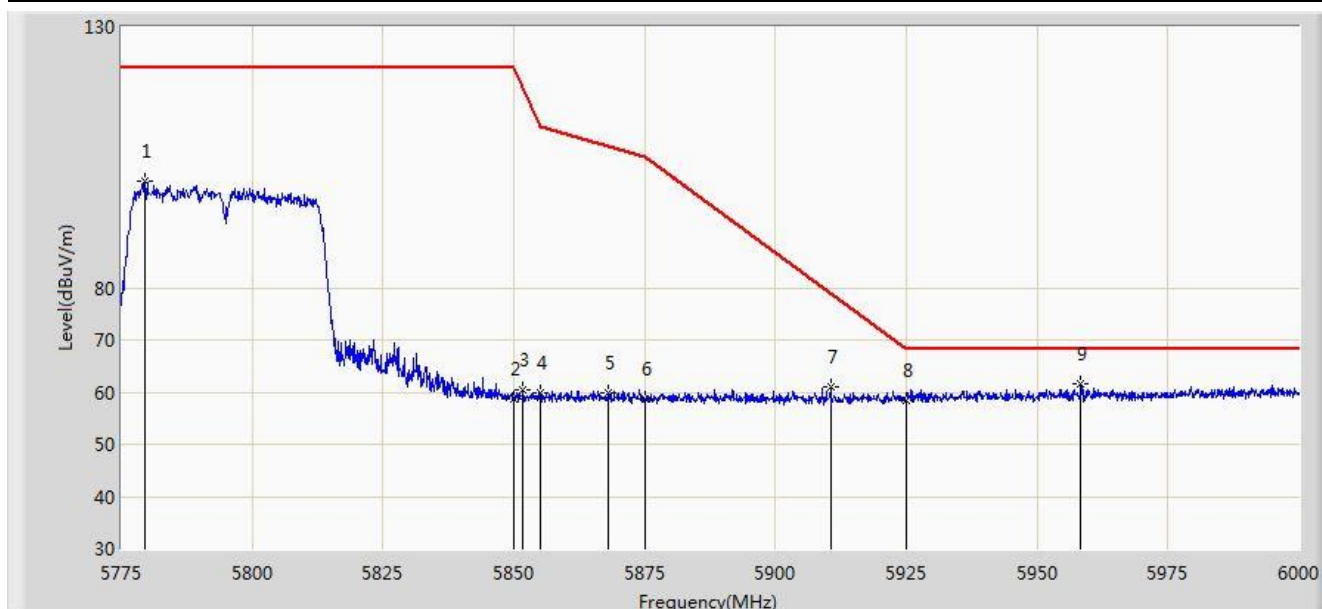


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5779.612	100.572	95.232	N/A	N/A	5.339	PK
2			5850.000	58.650	52.924	-63.550	122.200	5.726	PK
3			5851.725	60.361	54.628	-57.905	118.266	5.732	PK
4			5855.000	59.724	53.978	-51.076	110.800	5.746	PK
5			5868.150	59.999	54.203	-47.117	107.116	5.796	PK
6			5875.000	58.627	52.807	-46.573	105.200	5.820	PK
7			5910.562	60.944	55.013	-17.908	78.852	5.930	PK
8			5925.000	58.487	52.521	-9.713	68.200	5.967	PK
9		*	5958.263	61.466	55.425	-6.734	68.200	6.041	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 00:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5795MHz	

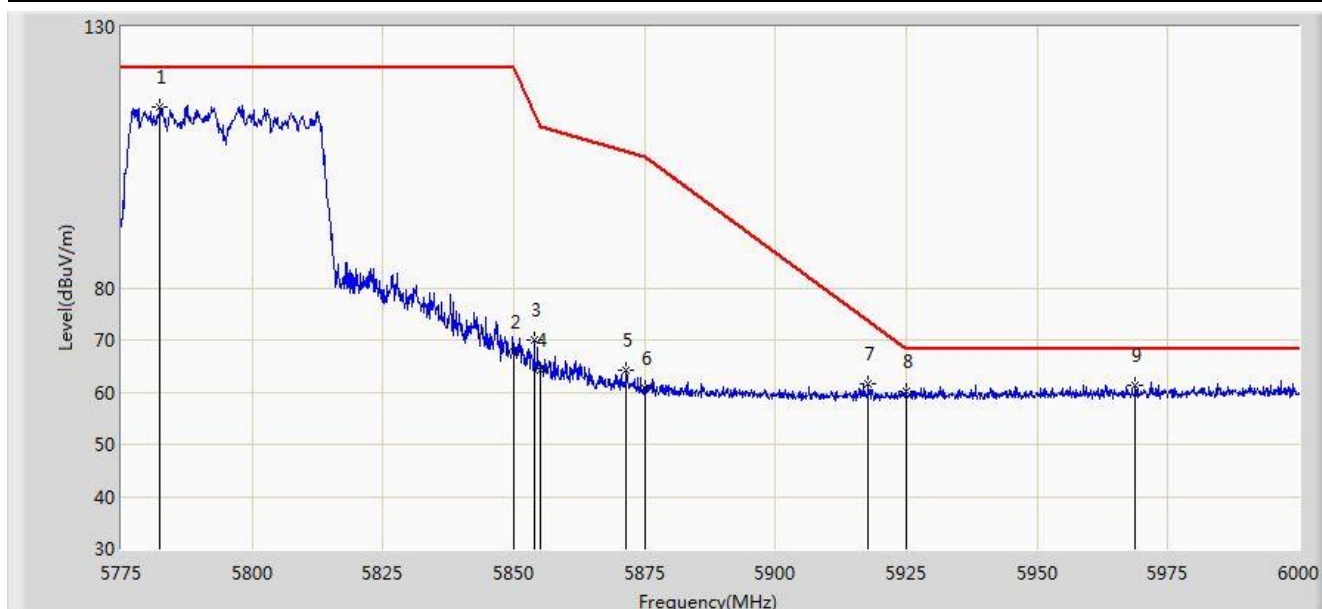


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5782.425	114.663	109.309	N/A	N/A	5.354	PK
2			5850.000	67.599	61.873	-54.601	122.200	5.726	PK
3			5853.975	70.085	64.343	-43.051	113.136	5.741	PK
4			5855.000	64.327	58.581	-46.473	110.800	5.746	PK
5			5871.525	64.313	58.505	-41.859	106.172	5.808	PK
6			5875.000	60.765	54.945	-44.435	105.200	5.820	PK
7			5917.763	61.525	55.576	-12.011	73.536	5.948	PK
8			5925.000	60.137	54.171	-8.063	68.200	5.967	PK
9		*	5968.837	61.300	55.241	-6.900	68.200	6.059	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 01:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

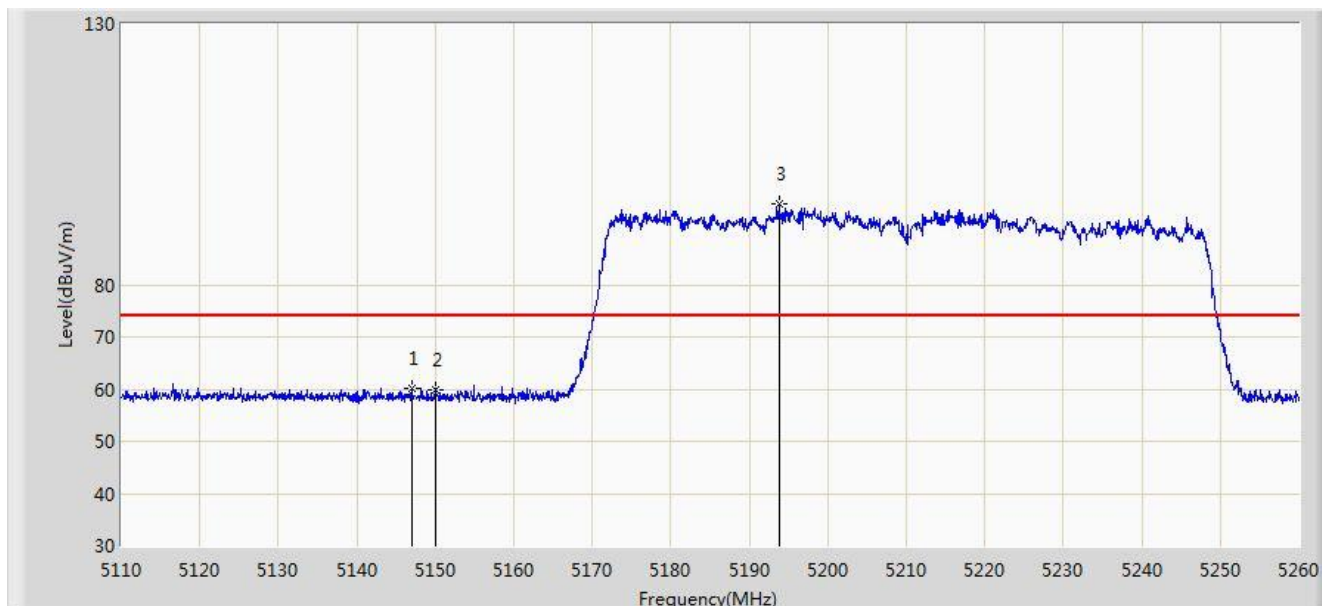


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.975	60.284	56.108	-13.716	74.000	4.176	PK
2			5150.000	59.978	55.809	-14.022	74.000	4.170	PK
3		*	5193.775	95.378	91.358	N/A	N/A	4.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 01:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

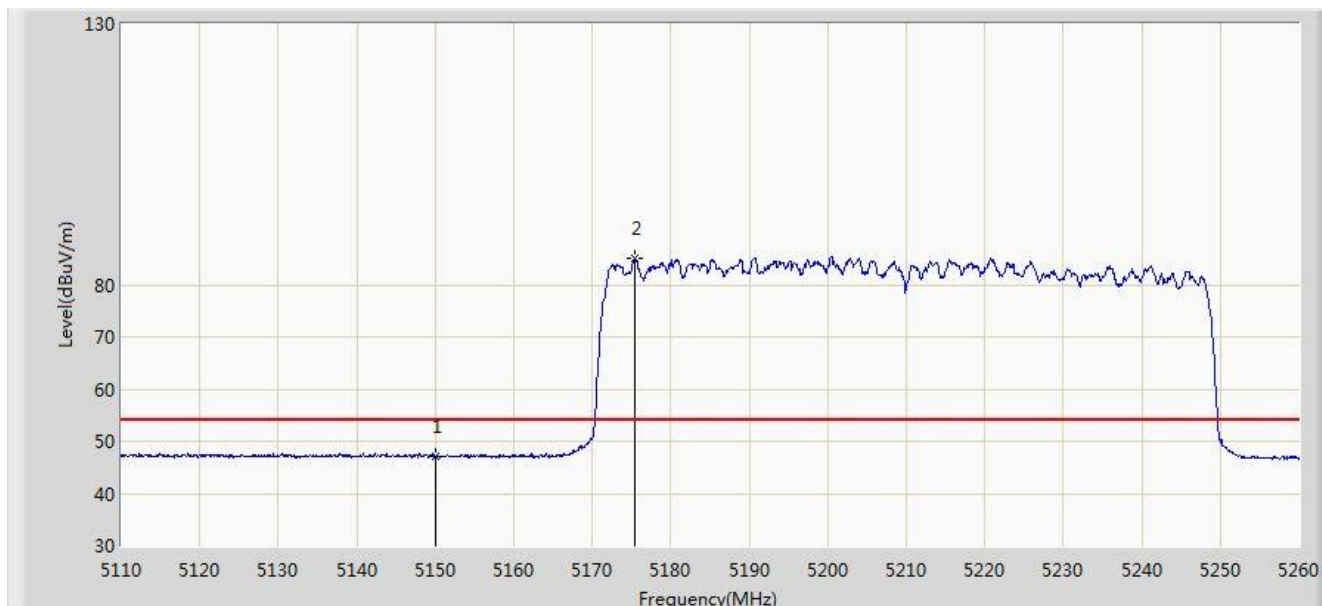


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.229	43.060	-6.771	54.000	4.170	AV
2		*	5175.475	85.148	81.063	N/A	N/A	4.084	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 01:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

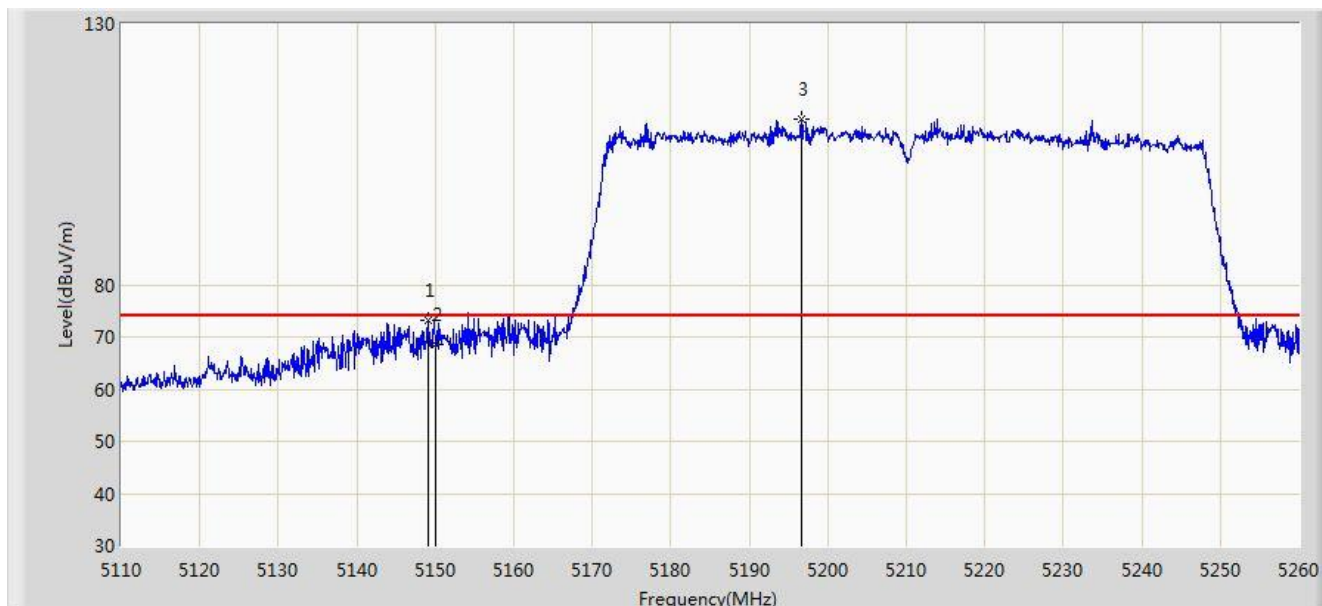


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.150	73.054	68.882	-0.946	74.000	4.172	PK
2			5150.000	68.473	64.304	-5.527	74.000	4.170	PK
3		*	5196.700	111.615	107.605	N/A	N/A	4.010	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 01:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

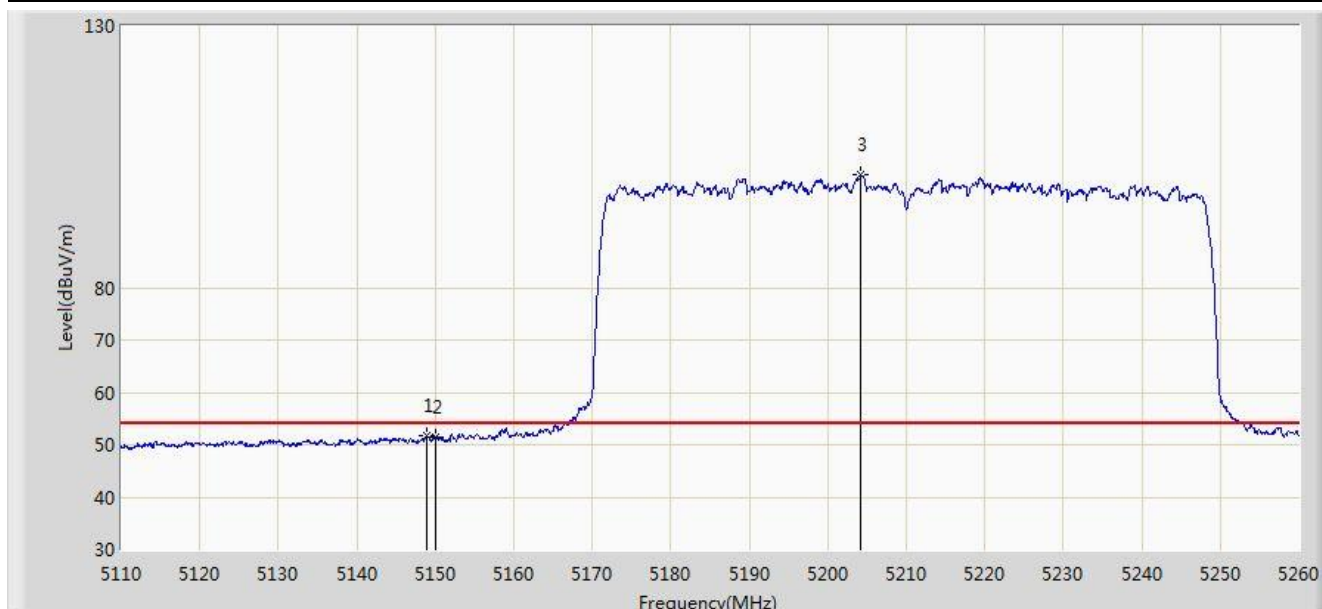


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.850	51.616	47.443	-2.384	54.000	4.173	AV
2			5150.000	51.419	47.250	-2.581	54.000	4.170	AV
3		*	5204.200	101.450	97.464	N/A	N/A	3.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 01:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

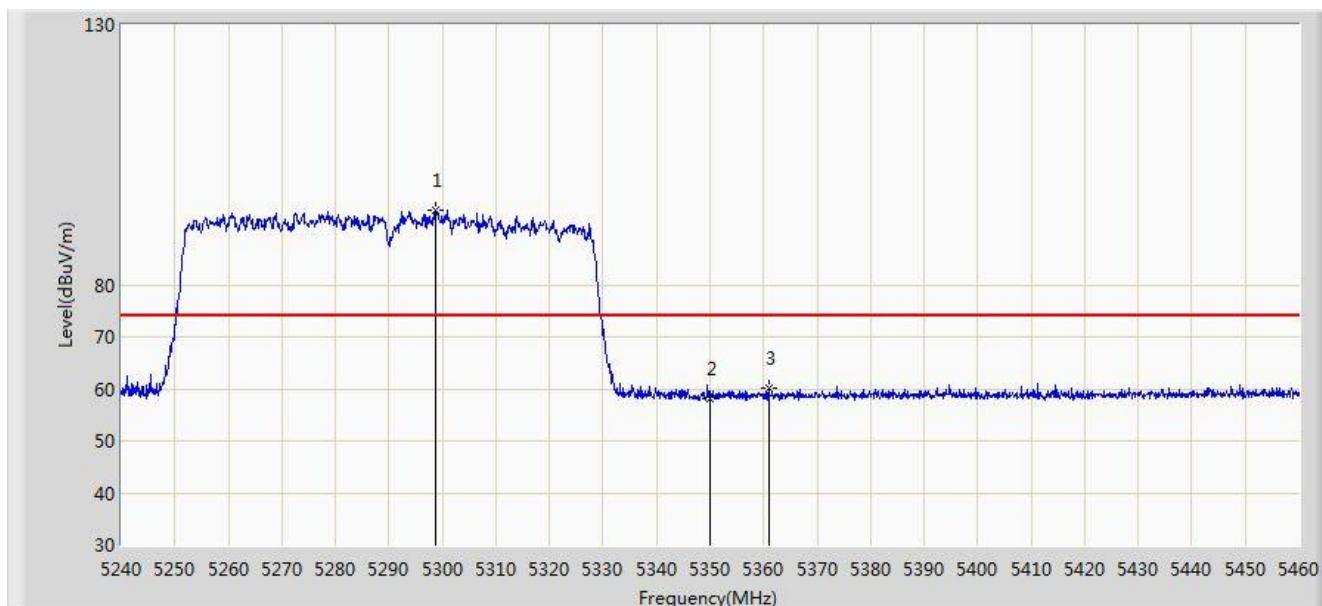


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.850	94.280	90.466	N/A	N/A	3.814	PK
2			5350.000	58.130	54.225	-15.870	74.000	3.904	PK
3			5360.890	60.069	56.145	-13.931	74.000	3.924	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 01:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

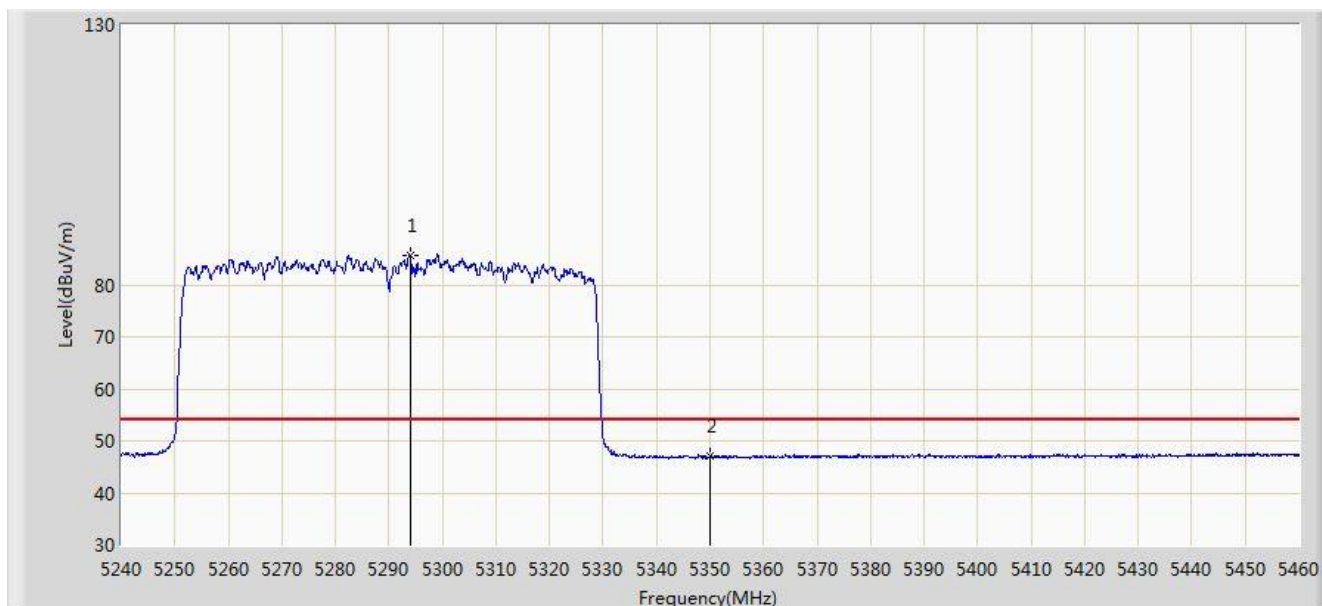


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.010	85.768	81.951	N/A	N/A	3.818	AV
2			5350.000	47.032	43.127	-6.968	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 01:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

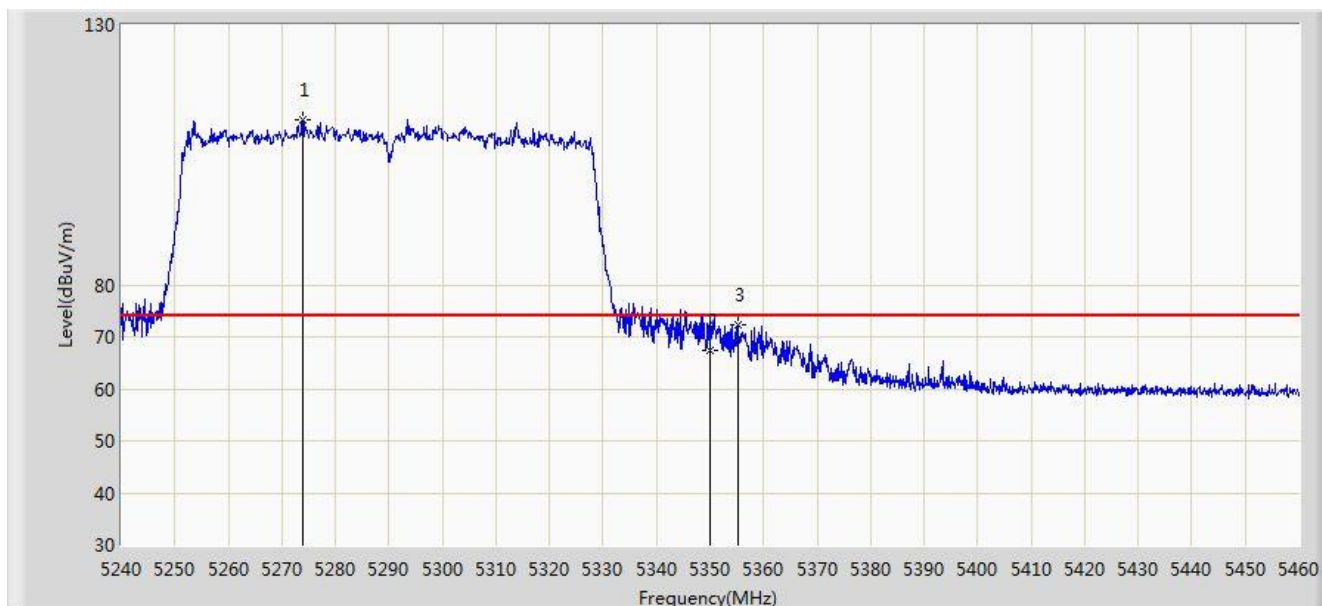


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5273.990	111.834	108.002	N/A	N/A	3.831	PK
2			5350.000	67.256	63.351	-6.744	74.000	3.904	PK
3			5355.170	72.225	68.311	-1.775	74.000	3.915	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 01:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

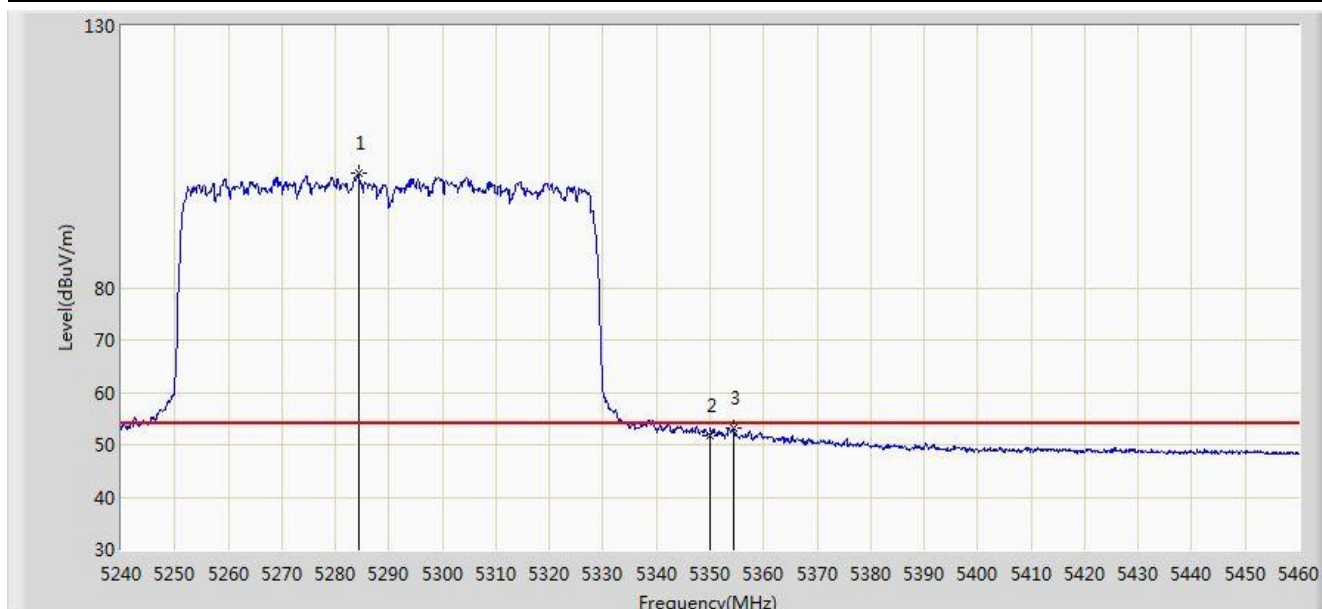


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5284.330	101.752	97.928	N/A	N/A	3.824	AV
2			5350.000	51.884	47.979	-2.116	54.000	3.904	AV
3			5354.290	53.234	49.321	-0.766	54.000	3.913	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

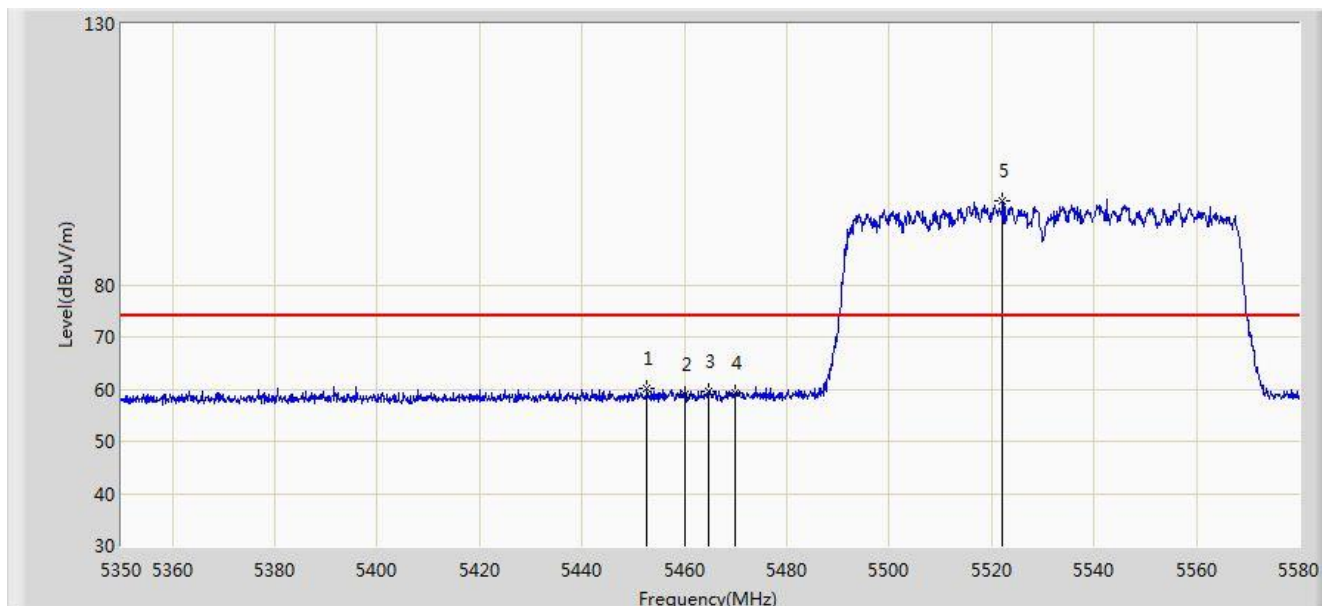


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.695	60.268	56.105	-13.732	74.000	4.163	PK
2			5460.000	58.922	54.742	-15.078	74.000	4.180	PK
3			5464.655	59.590	55.400	-8.610	68.200	4.191	PK
4			5470.000	59.321	55.119	-8.879	68.200	4.202	PK
5		*	5522.155	96.223	91.885	N/A	N/A	4.338	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

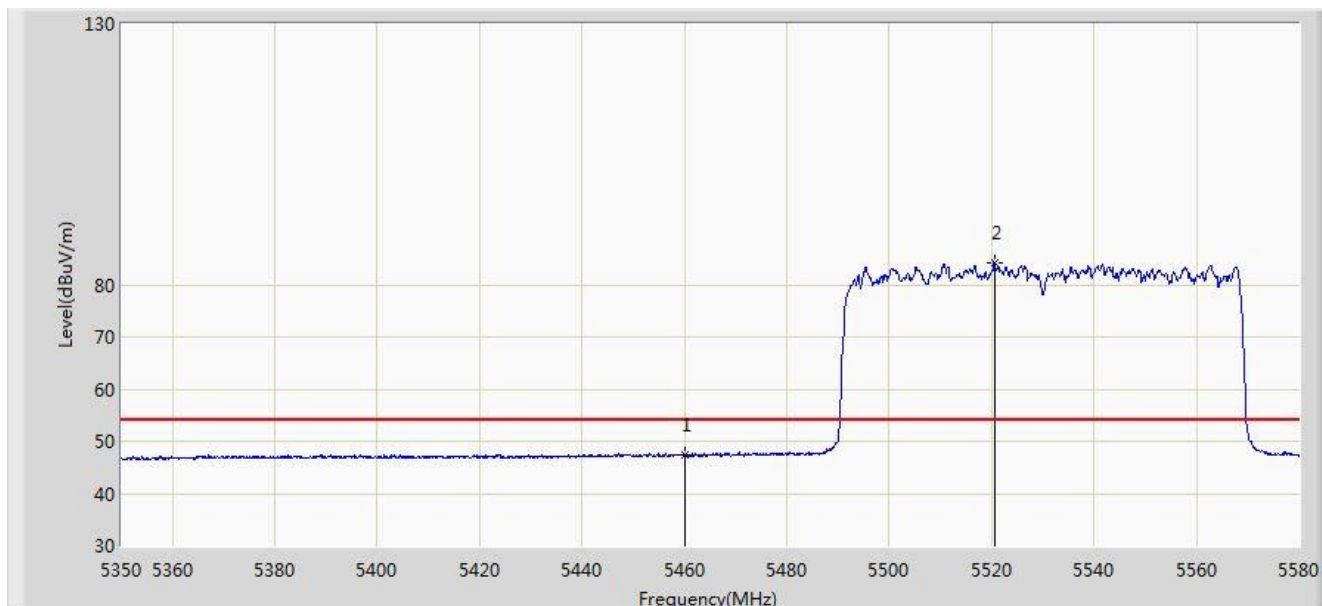


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.377	43.197	-6.623	54.000	4.180	AV
2		*	5520.545	84.223	79.890	N/A	N/A	4.333	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

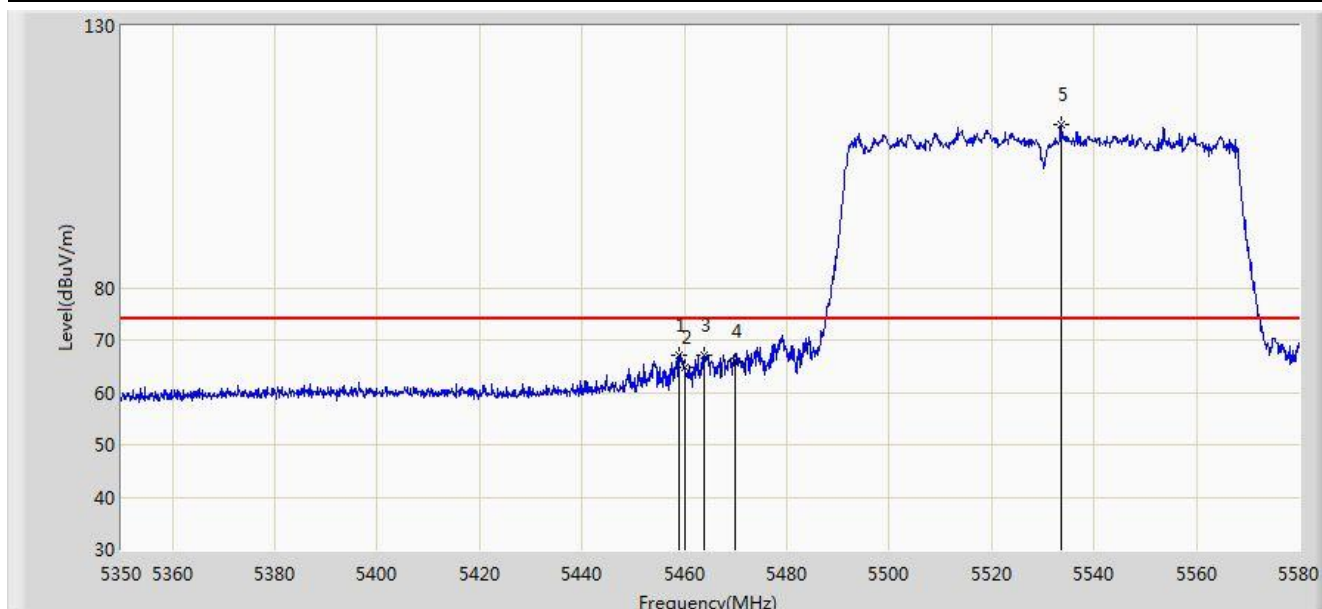


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.020	66.994	62.816	-7.006	74.000	4.178	PK
2			5460.000	64.651	60.471	-9.349	74.000	4.180	PK
3			5463.735	67.152	62.964	-1.048	68.200	4.188	PK
4			5470.000	65.984	61.782	-2.216	68.200	4.202	PK
5		*	5533.655	111.154	106.782	N/A	N/A	4.372	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

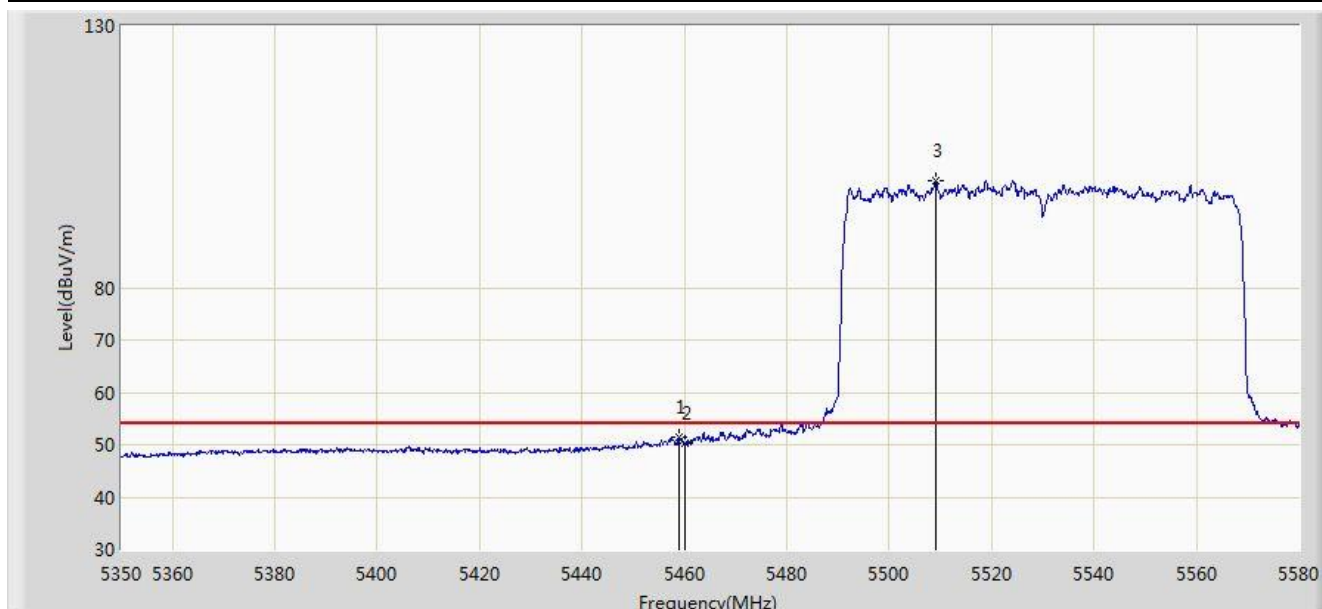


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.905	51.358	47.180	-2.642	54.000	4.178	AV
2			5460.000	50.153	45.973	-3.847	54.000	4.180	AV
3		*	5509.160	100.508	96.209	N/A	N/A	4.299	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

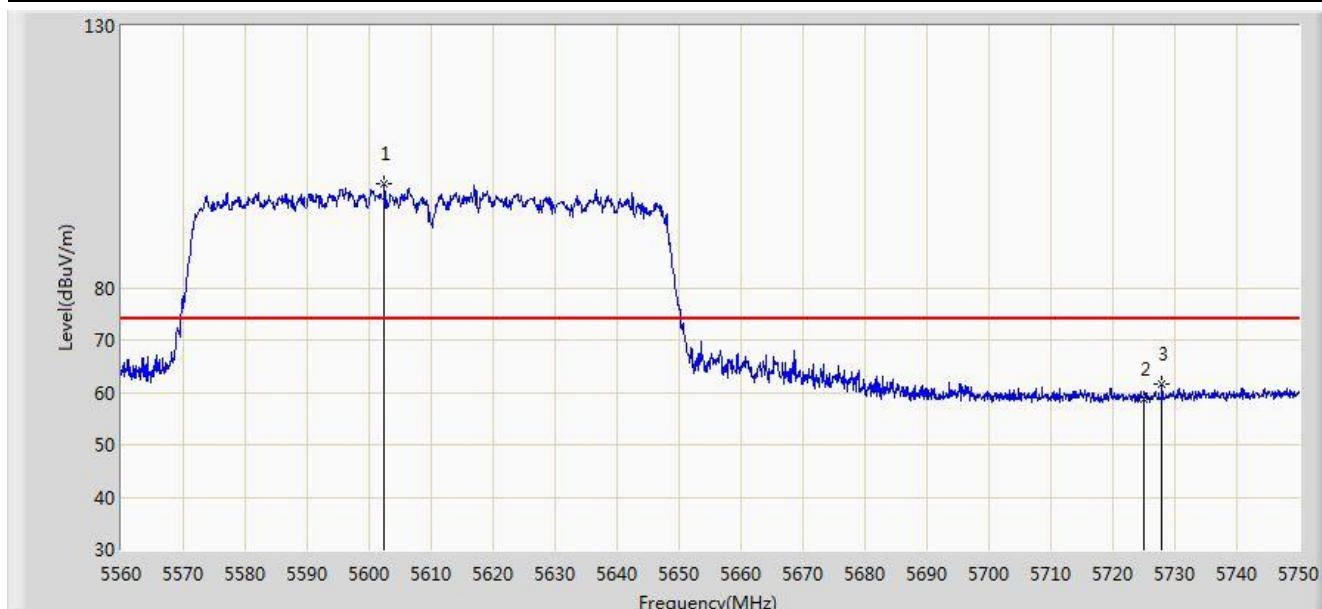


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5602.465	99.811	95.278	N/A	N/A	4.534	PK
2			5725.000	58.721	53.692	-15.279	74.000	5.029	PK
3			5727.960	61.626	56.578	-12.374	74.000	5.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

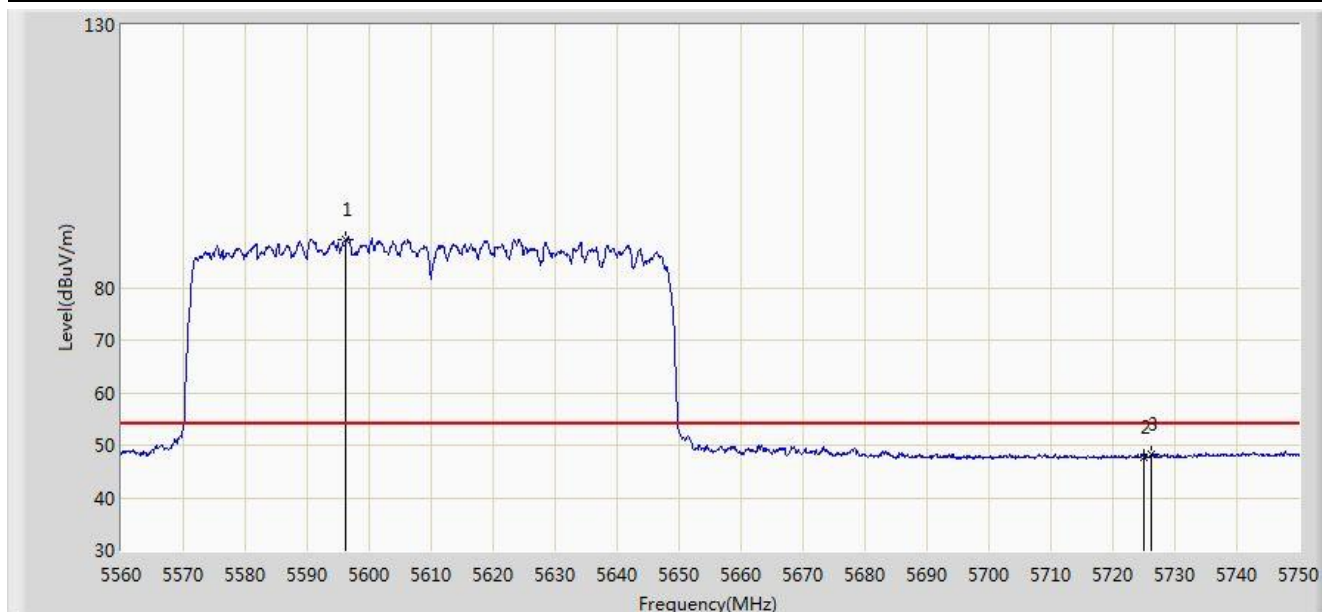


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5596.290	89.258	84.740	N/A	N/A	4.519	AV
2			5725.000	47.760	42.731	-6.240	54.000	5.029	AV
3			5726.250	48.209	43.172	-5.791	54.000	5.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

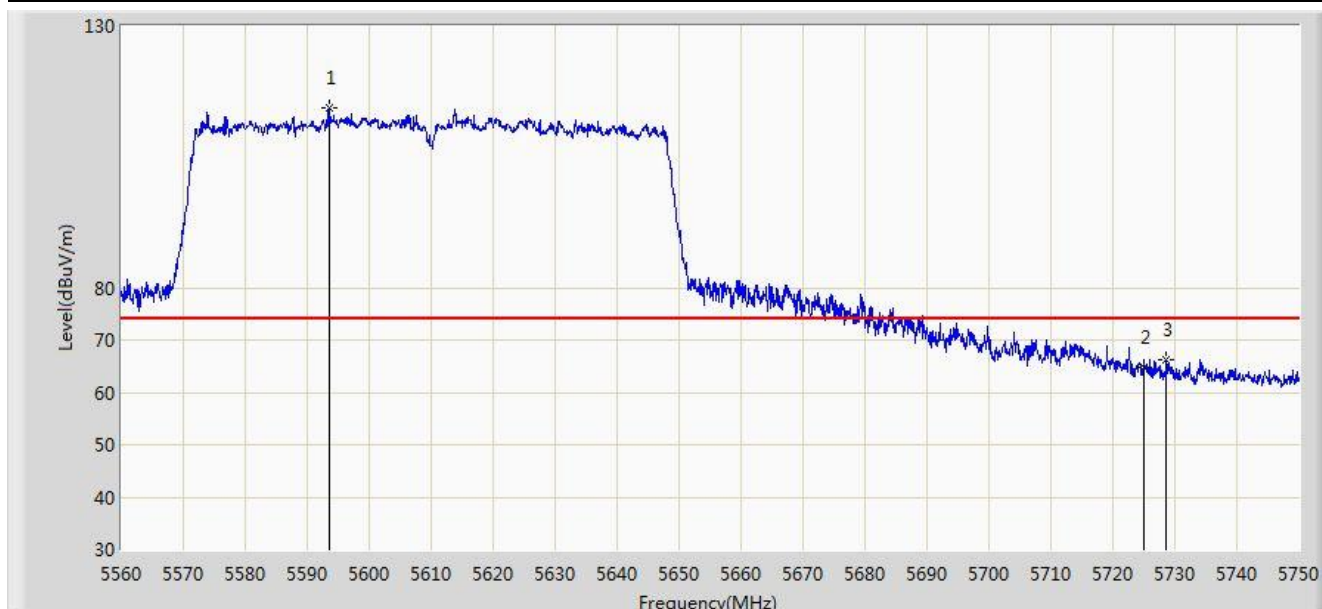


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5593.535	114.381	109.869	N/A	N/A	4.511	PK
2			5725.000	64.705	59.676	-9.295	74.000	5.029	PK
3			5728.625	66.279	61.227	-7.721	74.000	5.052	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

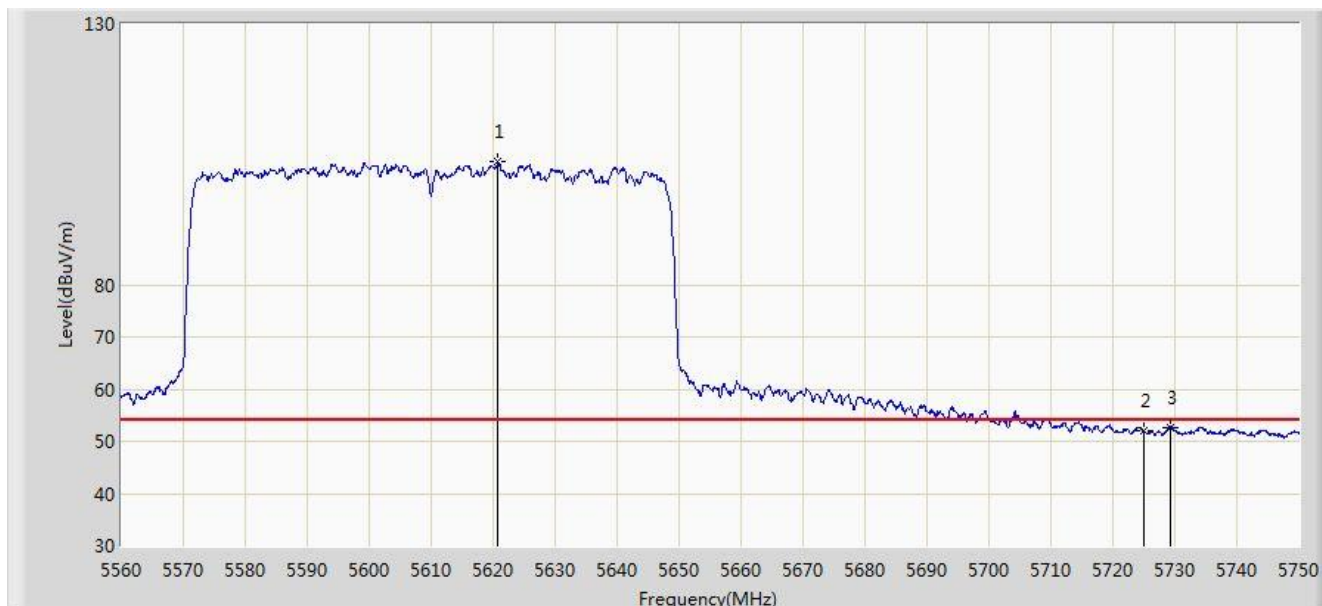


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5620.800	103.600	99.017	N/A	N/A	4.583	AV
2			5725.000	52.002	46.973	-1.998	54.000	5.029	AV
3			5729.195	52.701	47.645	-1.299	54.000	5.055	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5775MHz	

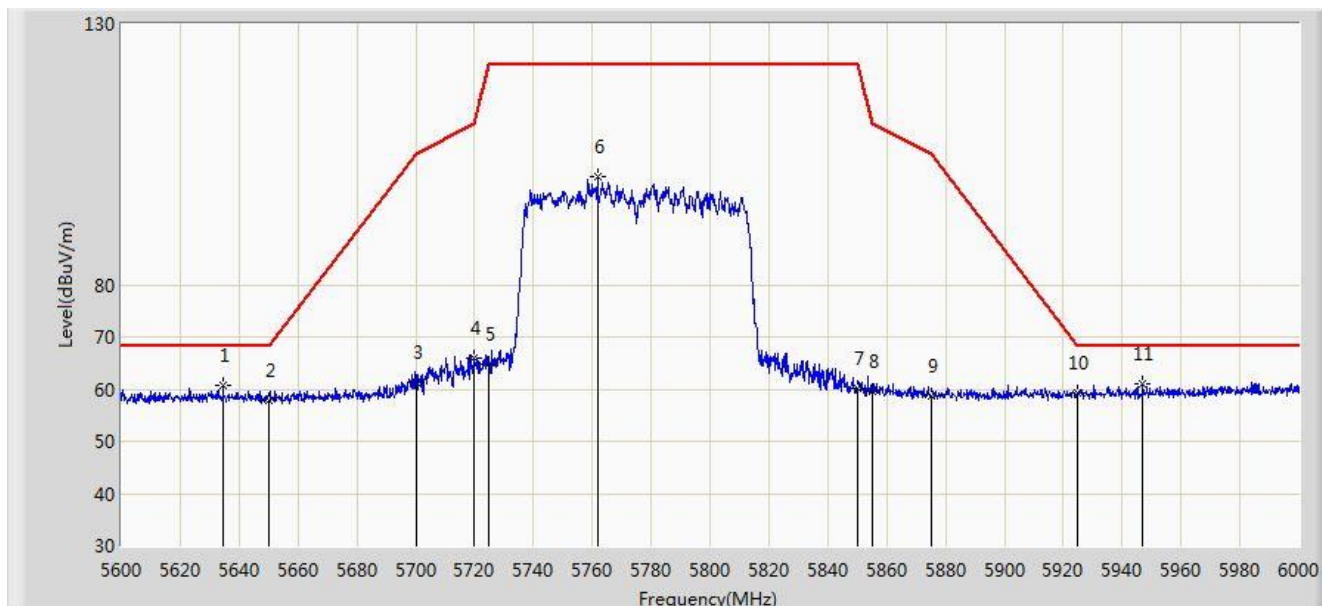


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5634.600	60.837	56.215	-7.363	68.200	4.622	PK
2			5650.000	57.860	53.189	-10.340	68.200	4.671	PK
3			5700.000	61.211	56.333	-43.989	105.200	4.878	PK
4			5720.000	66.032	61.035	-44.768	110.800	4.997	PK
5			5725.000	64.729	59.700	-57.471	122.200	5.029	PK
6			5761.800	100.835	95.586	N/A	N/A	5.249	PK
7			5850.000	60.013	54.287	-62.187	122.200	5.726	PK
8			5855.000	59.610	53.864	-51.190	110.800	5.746	PK
9			5875.000	58.576	52.756	-46.624	105.200	5.820	PK
10			5925.000	59.197	53.231	-9.003	68.200	5.967	PK
11		*	5947.000	61.133	55.113	-7.067	68.200	6.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5775MHz	

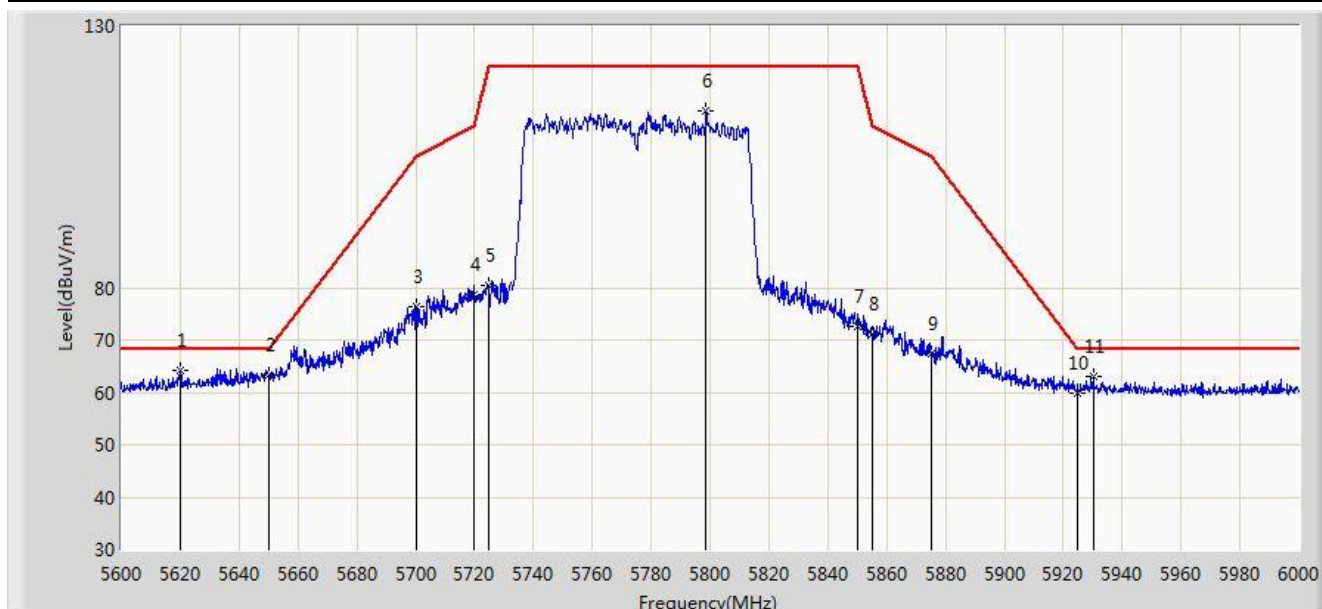


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5620.200	64.173	59.592	-4.027	68.200	4.581	PK
2			5650.000	63.455	58.784	-4.745	68.200	4.671	PK
3			5700.000	76.430	71.552	-28.770	105.200	4.878	PK
4			5720.000	78.740	73.743	-32.060	110.800	4.997	PK
5			5725.000	80.405	75.376	-41.795	122.200	5.029	PK
6			5798.600	113.812	108.375	N/A	N/A	5.438	PK
7			5850.000	72.539	66.813	-49.661	122.200	5.726	PK
8			5855.000	71.036	65.290	-39.764	110.800	5.746	PK
9			5875.000	67.317	61.497	-37.883	105.200	5.820	PK
10			5925.000	59.802	53.836	-8.398	68.200	5.967	PK
11			5930.200	63.140	57.161	-5.060	68.200	5.979	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

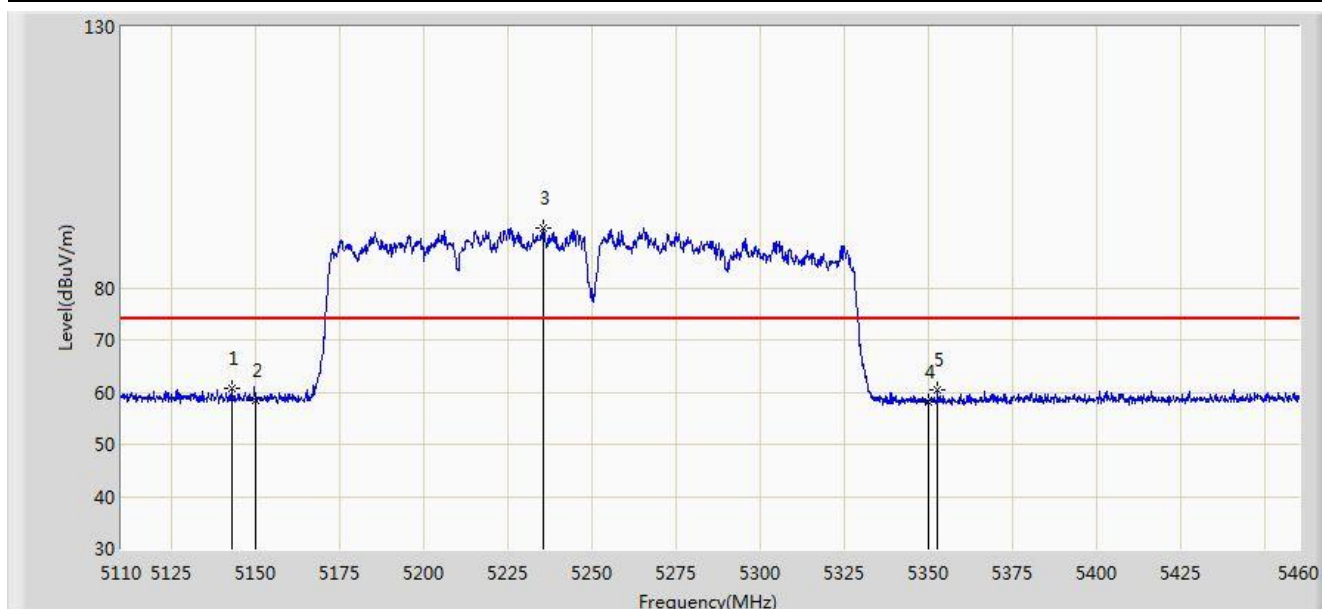


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.725	60.741	56.565	-13.259	74.000	4.176	PK
2			5150.000	58.452	54.283	-15.548	74.000	4.170	PK
3		*	5235.650	91.369	87.476	N/A	N/A	3.893	PK
4			5350.000	58.167	54.262	-15.833	74.000	3.904	PK
5			5352.725	60.298	56.388	-13.702	74.000	3.910	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

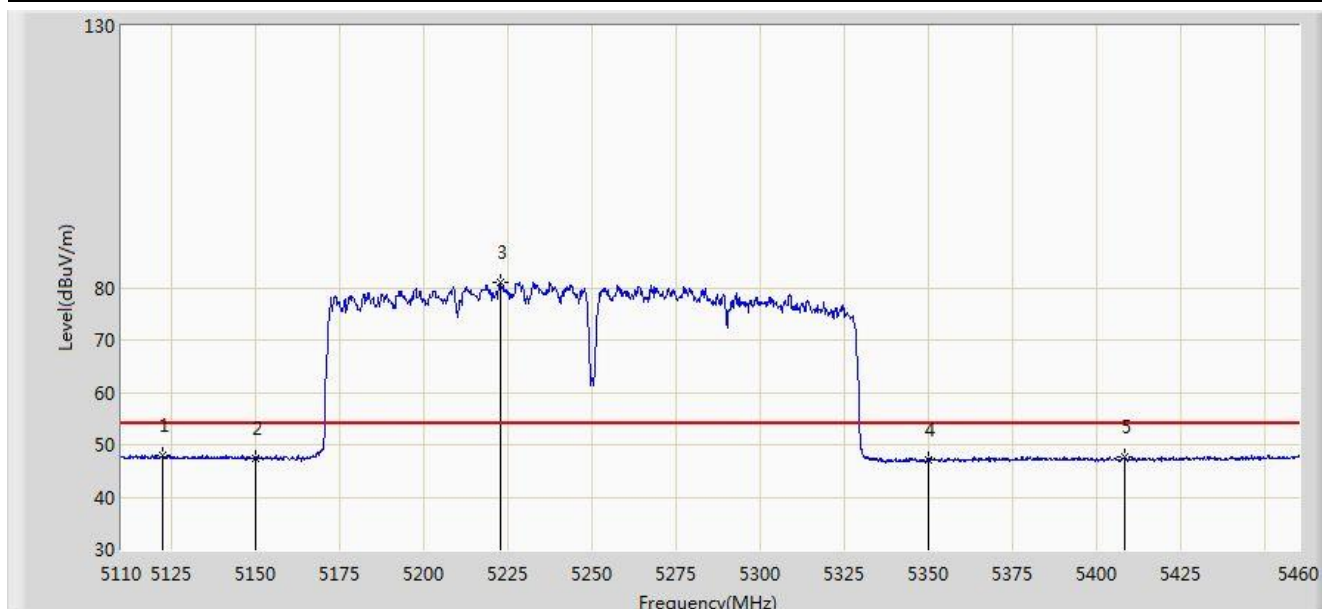


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5122.250	48.018	43.843	-5.982	54.000	4.175	AV
2			5150.000	47.519	43.350	-6.481	54.000	4.170	AV
3		*	5222.700	80.881	76.950	N/A	N/A	3.931	AV
4			5350.000	47.176	43.271	-6.824	54.000	3.904	AV
5			5408.375	47.592	43.569	-6.408	54.000	4.024	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

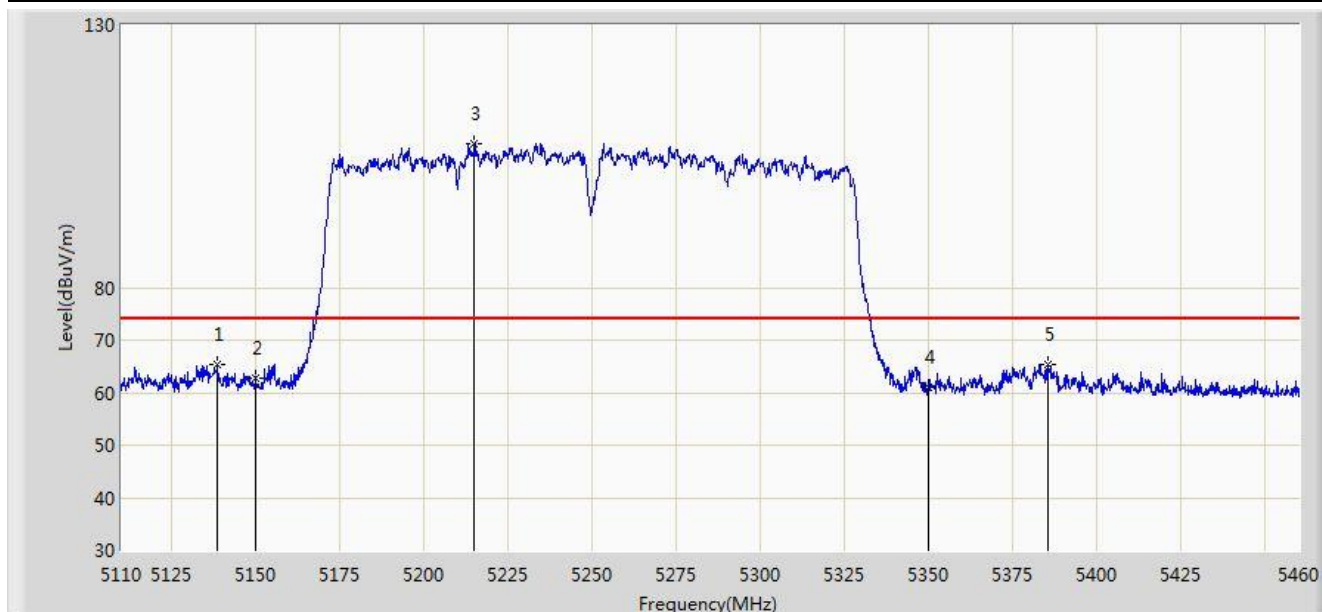


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.700	65.311	61.136	-8.689	74.000	4.175	PK
2			5150.000	62.639	58.470	-11.361	74.000	4.170	PK
3		*	5215.000	107.446	103.492	N/A	N/A	3.954	PK
4			5350.000	61.040	57.135	-12.960	74.000	3.904	PK
5			5385.625	65.386	61.416	-8.614	74.000	3.969	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

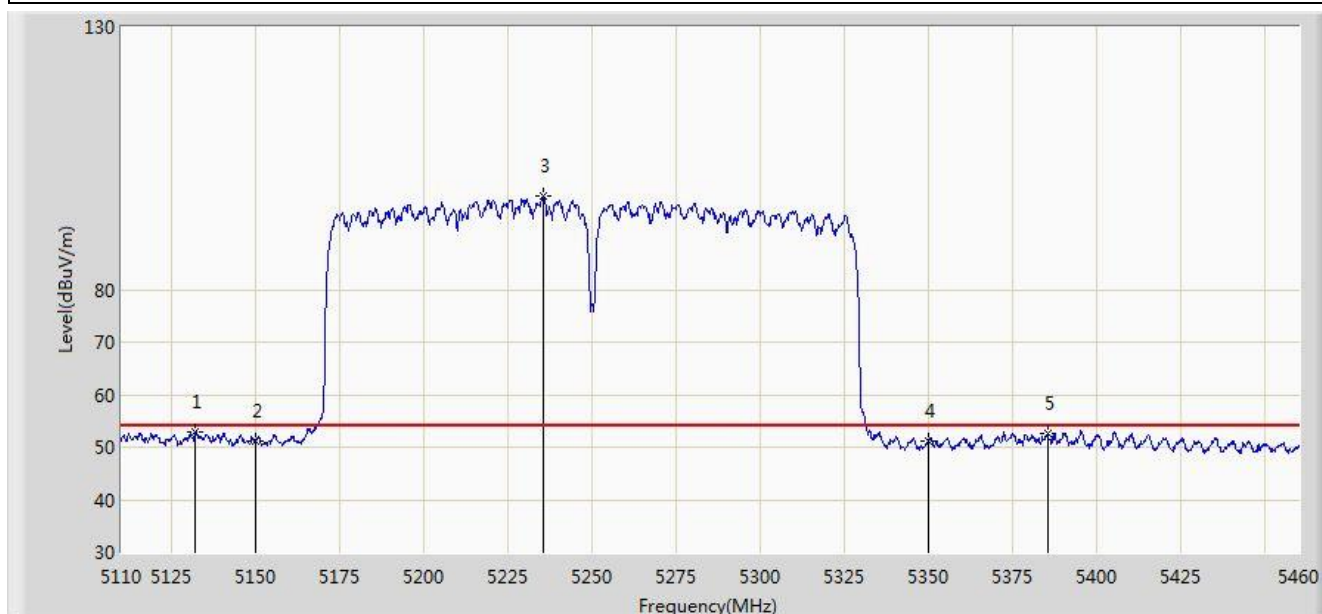


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.050	52.835	48.660	-1.165	54.000	4.175	AV
2			5150.000	51.232	47.063	-2.768	54.000	4.170	AV
3		*	5235.300	97.840	93.946	N/A	N/A	3.894	AV
4			5350.000	51.290	47.385	-2.710	54.000	3.904	AV
5			5385.275	52.694	48.725	-1.306	54.000	3.970	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

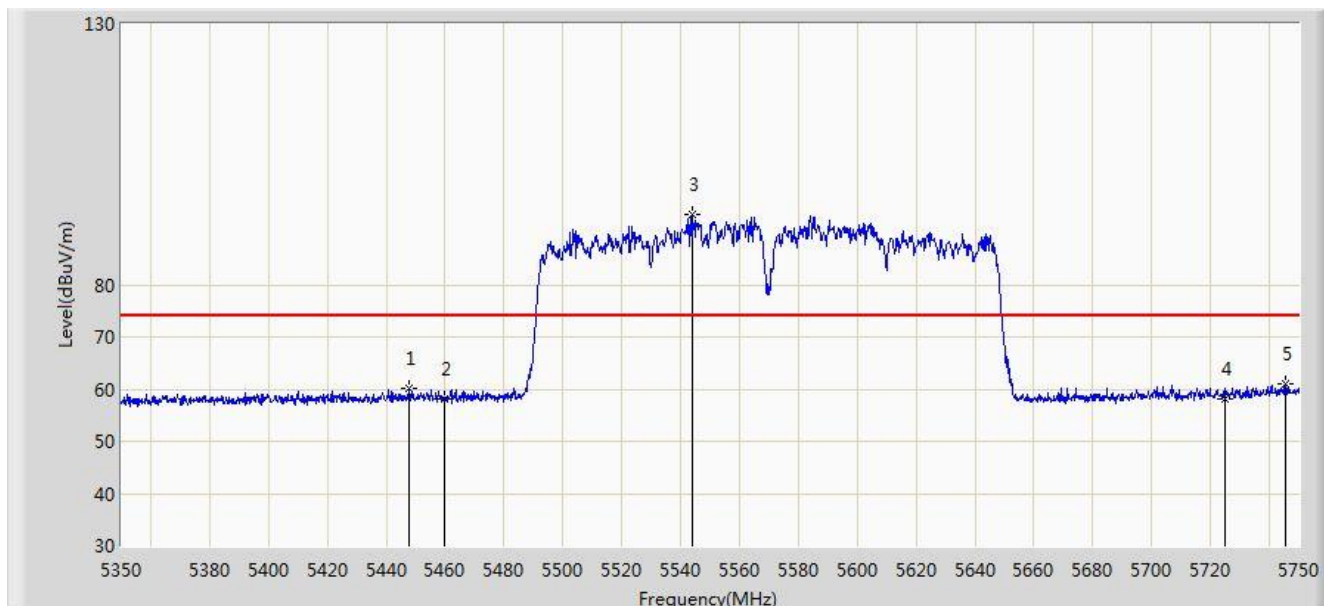


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.800	60.027	55.879	-13.973	74.000	4.148	PK
2			5460.000	58.158	53.978	-15.842	74.000	4.180	PK
3		*	5543.800	93.523	89.122	N/A	N/A	4.402	PK
4			5725.000	58.204	53.175	-15.796	74.000	5.029	PK
5			5745.400	60.966	55.809	-13.034	74.000	5.158	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

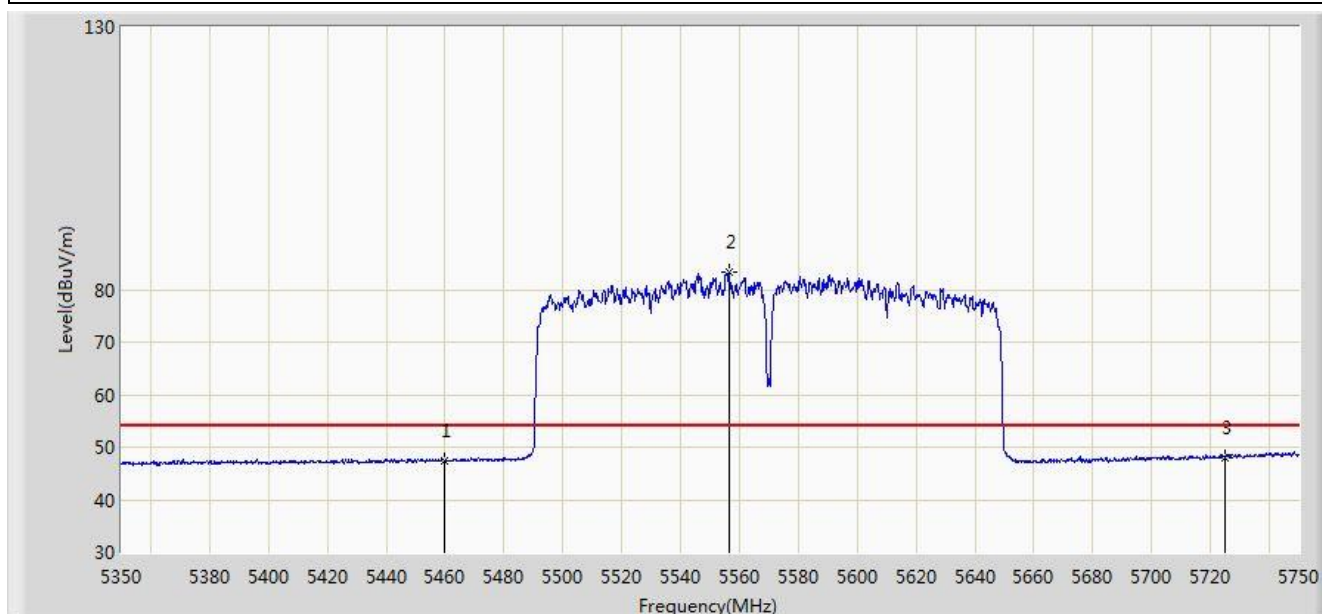


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.292	43.112	-6.708	54.000	4.180	AV
2		*	5556.400	83.421	78.986	N/A	N/A	4.435	AV
3			5725.000	47.952	42.923	-6.048	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570Hz	

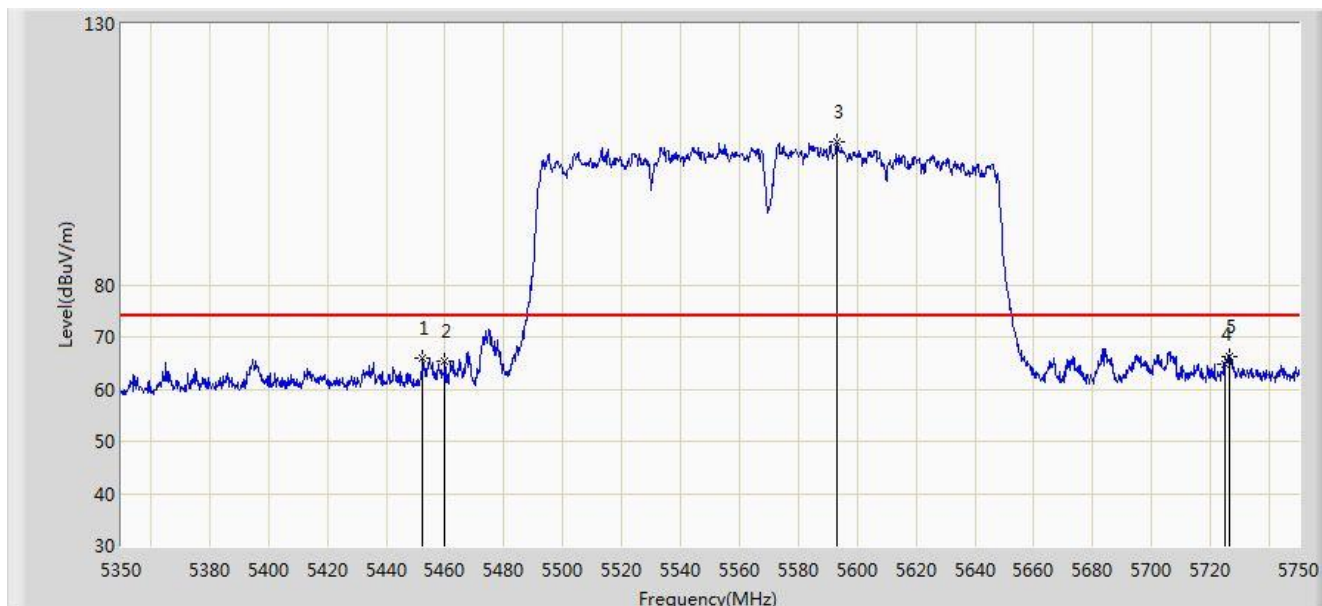


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.400	66.062	61.900	-7.938	74.000	4.163	PK
2			5460.000	65.388	61.208	-8.612	74.000	4.180	PK
3		*	5593.200	107.317	102.806	N/A	N/A	4.511	PK
4			5725.000	64.679	59.650	-9.321	74.000	5.029	PK
5			5726.200	66.193	61.156	-7.807	74.000	5.037	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 05:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

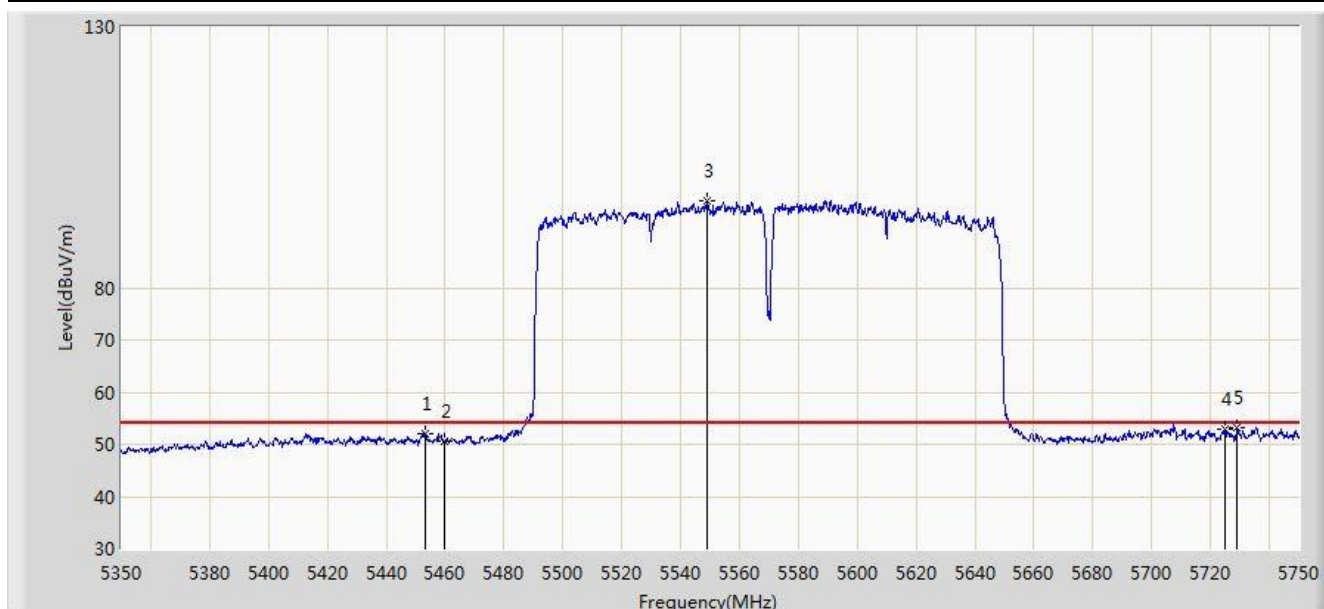


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.400	51.923	47.757	-2.077	54.000	4.165	AV
2			5460.000	50.447	46.267	-3.553	54.000	4.180	AV
3		*	5549.000	96.766	92.351	N/A	N/A	4.415	AV
4			5725.000	52.860	47.831	-1.140	54.000	5.029	AV
5			5729.000	53.151	48.096	-0.849	54.000	5.054	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

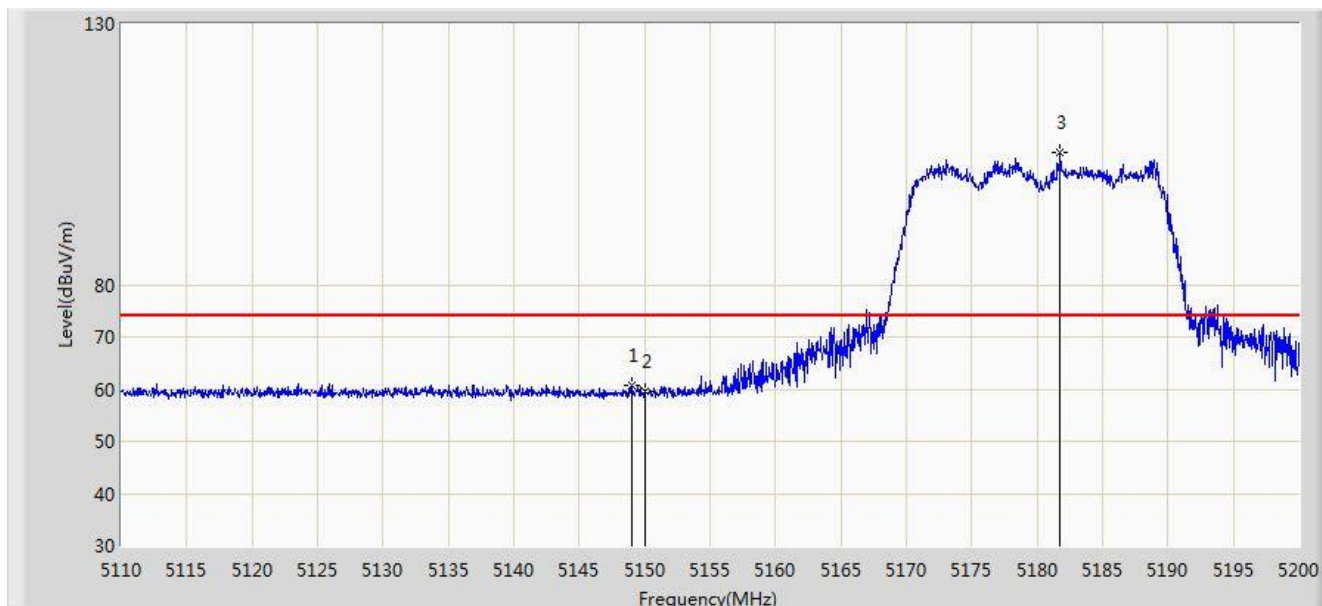


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.015	60.605	56.433	-13.395	74.000	4.173	PK
2			5150.000	59.683	55.514	-14.317	74.000	4.170	PK
3		*	5181.775	105.264	101.201	N/A	N/A	4.063	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

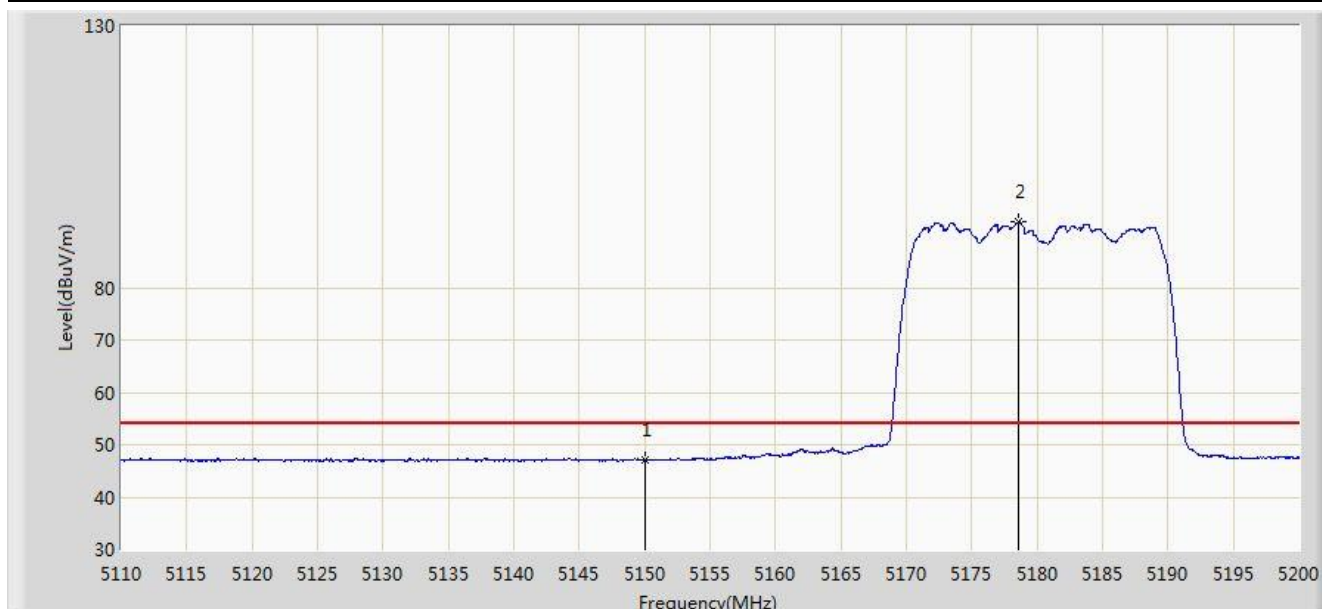


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.016	42.847	-6.984	54.000	4.170	AV
2		*	5178.625	92.636	88.562	N/A	N/A	4.074	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

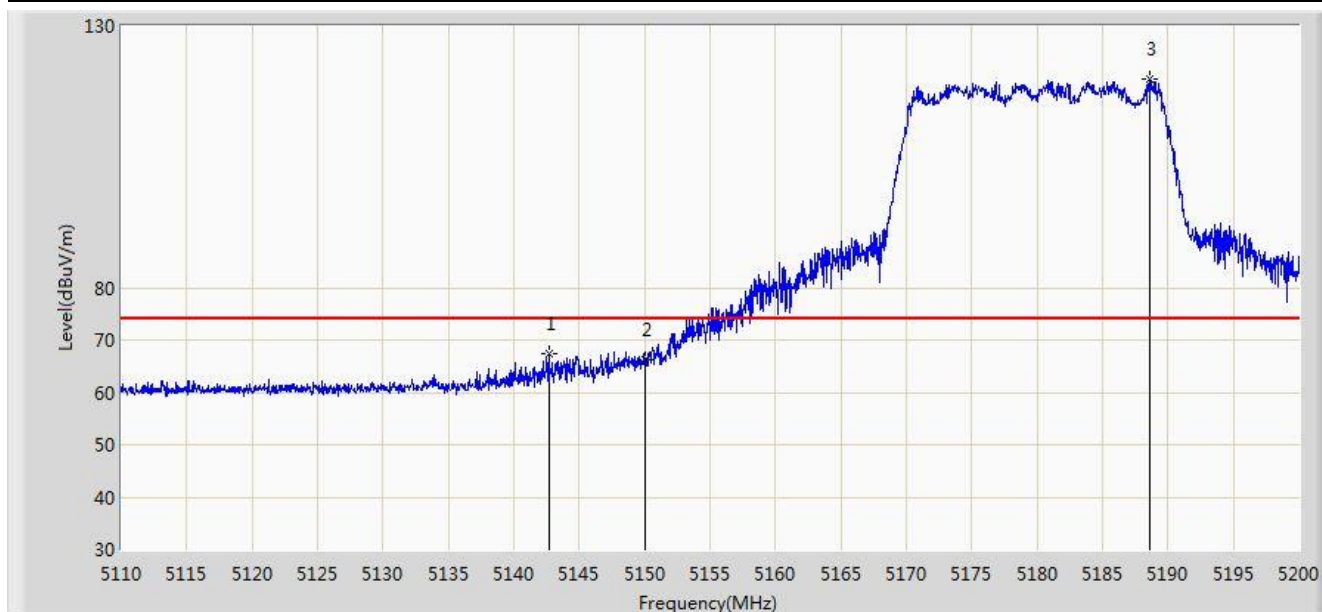


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.715	67.271	63.095	-6.729	74.000	4.176	PK
2			5150.000	66.290	62.121	-7.710	74.000	4.170	PK
3		*	5188.660	119.757	115.719	N/A	N/A	4.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

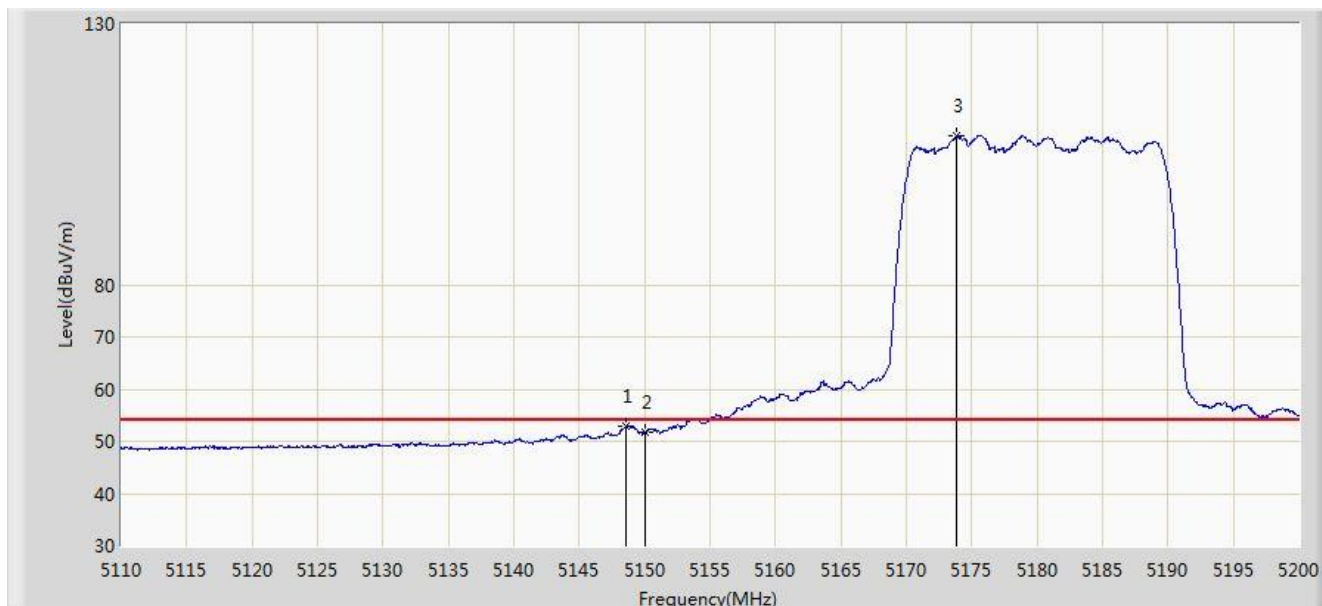


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.610	52.857	48.683	-1.143	54.000	4.174	AV
2			5150.000	51.716	47.547	-2.284	54.000	4.170	AV
3	X	*	5173.810	108.419	104.328	N/A	N/A	4.091	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

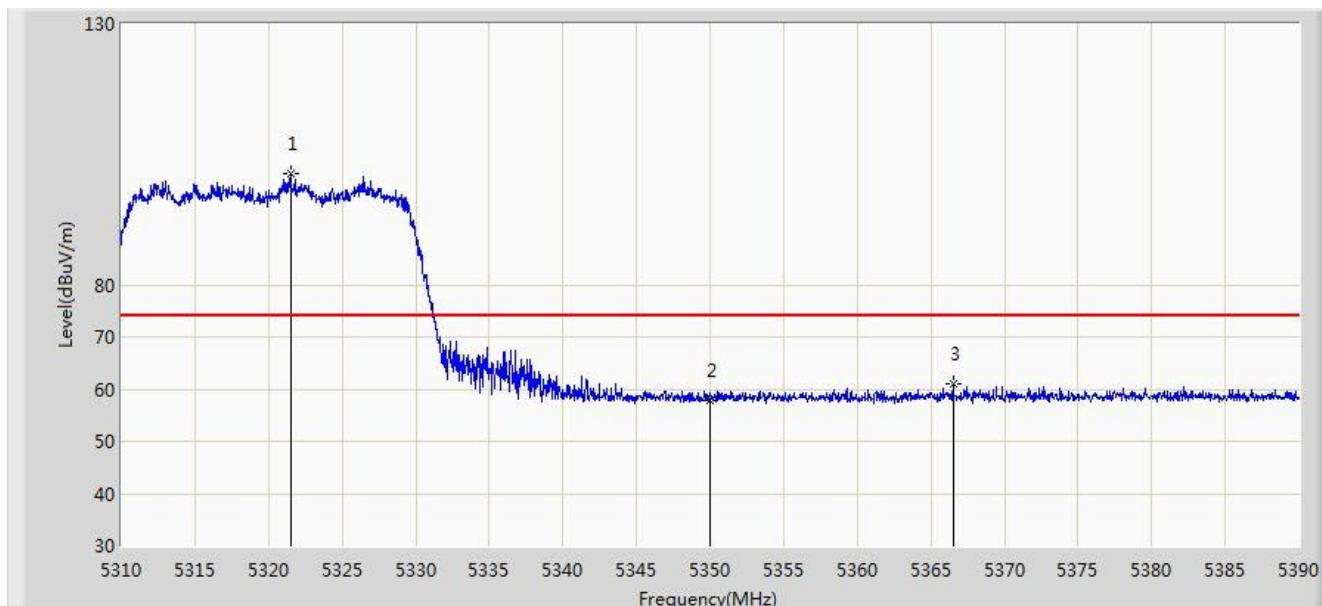


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.480	101.344	97.493	N/A	N/A	3.851	PK
2			5350.000	57.840	53.935	-16.160	74.000	3.904	PK
3			5366.520	60.912	56.977	-13.088	74.000	3.935	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

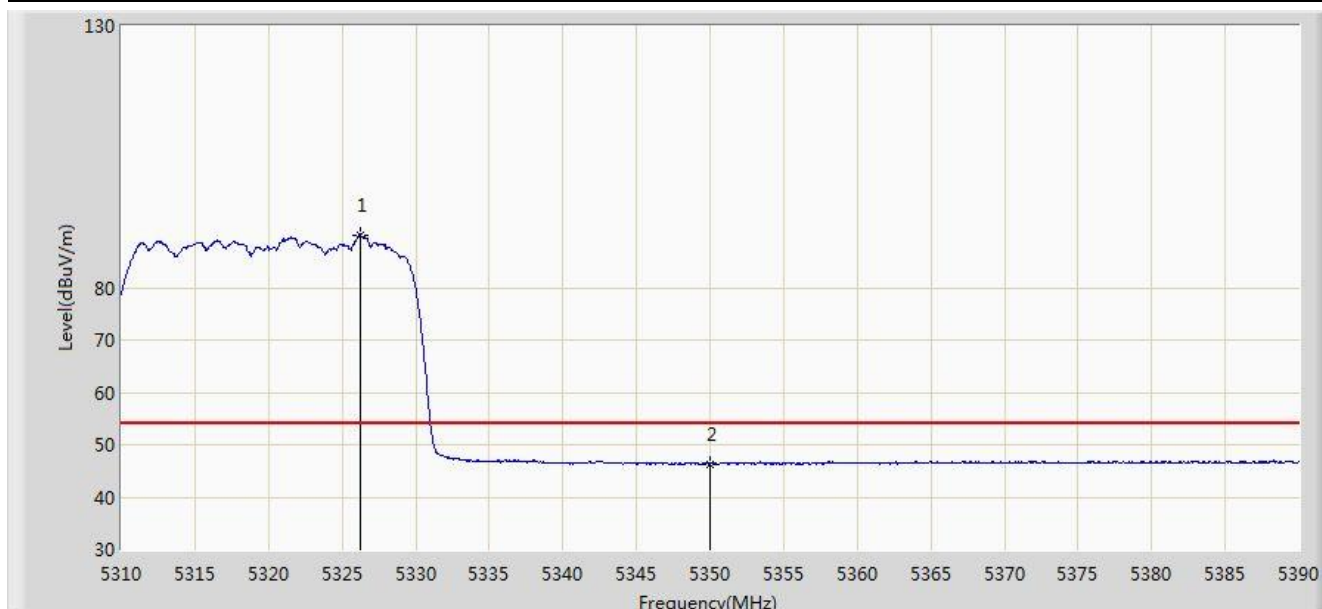


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.200	90.102	86.242	N/A	N/A	3.860	AV
2			5350.000	46.288	42.383	-7.712	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

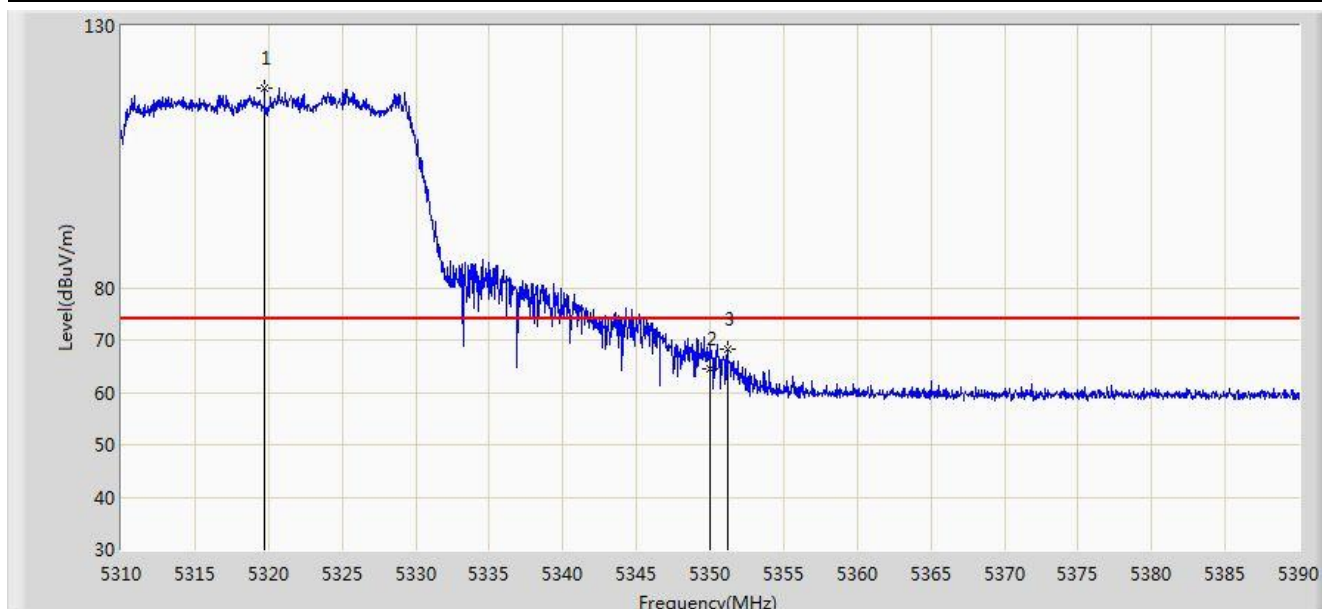


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.720	118.129	114.281	N/A	N/A	3.848	PK
2			5350.000	64.497	60.592	-9.503	74.000	3.904	PK
3			5351.160	68.357	64.450	-5.643	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

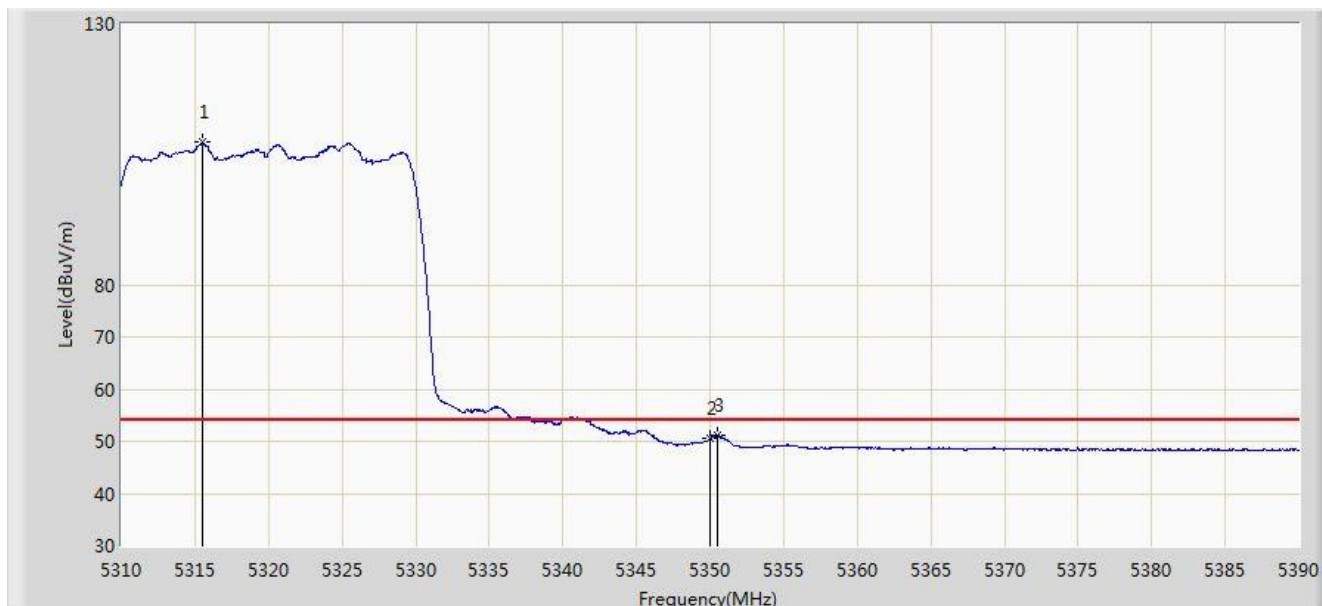


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.520	107.287	103.447	N/A	N/A	3.841	AV
2			5350.000	50.507	46.602	-3.493	54.000	3.904	AV
3			5350.520	51.111	47.205	-2.889	54.000	3.906	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

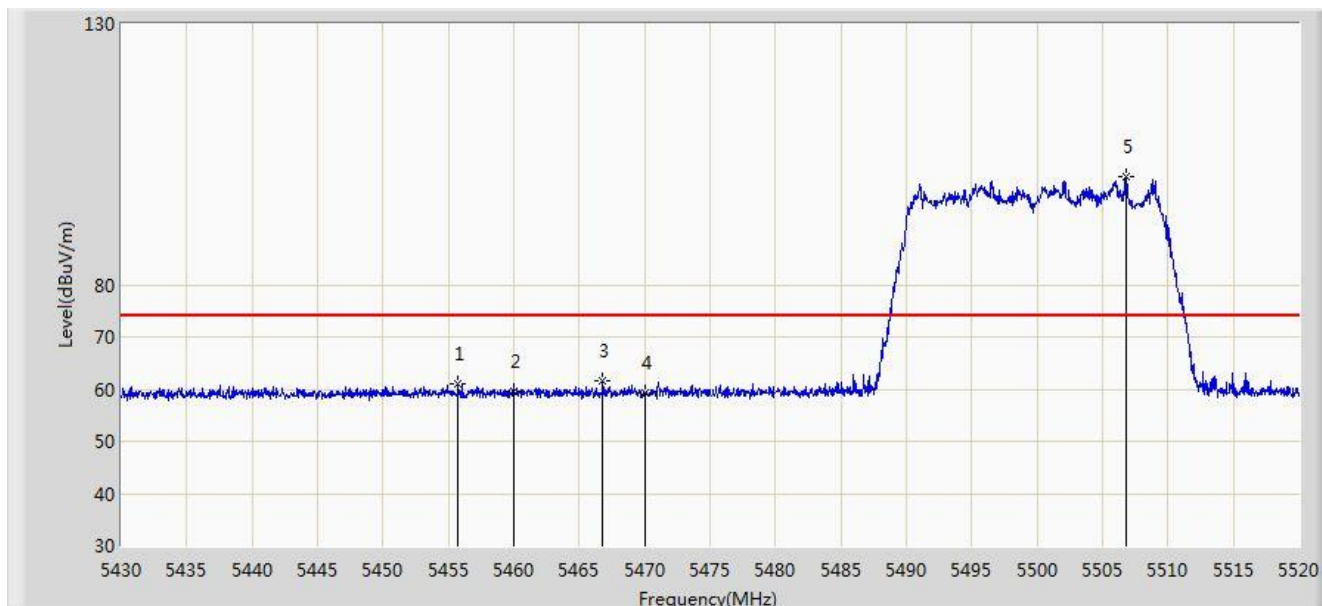


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.740	61.029	56.858	-12.971	74.000	4.171	PK
2			5460.000	59.710	55.530	-14.290	74.000	4.180	PK
3			5466.810	61.609	57.414	-6.591	68.200	4.196	PK
4			5470.000	59.263	55.061	-8.937	68.200	4.202	PK
5		*	5506.815	100.685	96.393	N/A	N/A	4.292	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

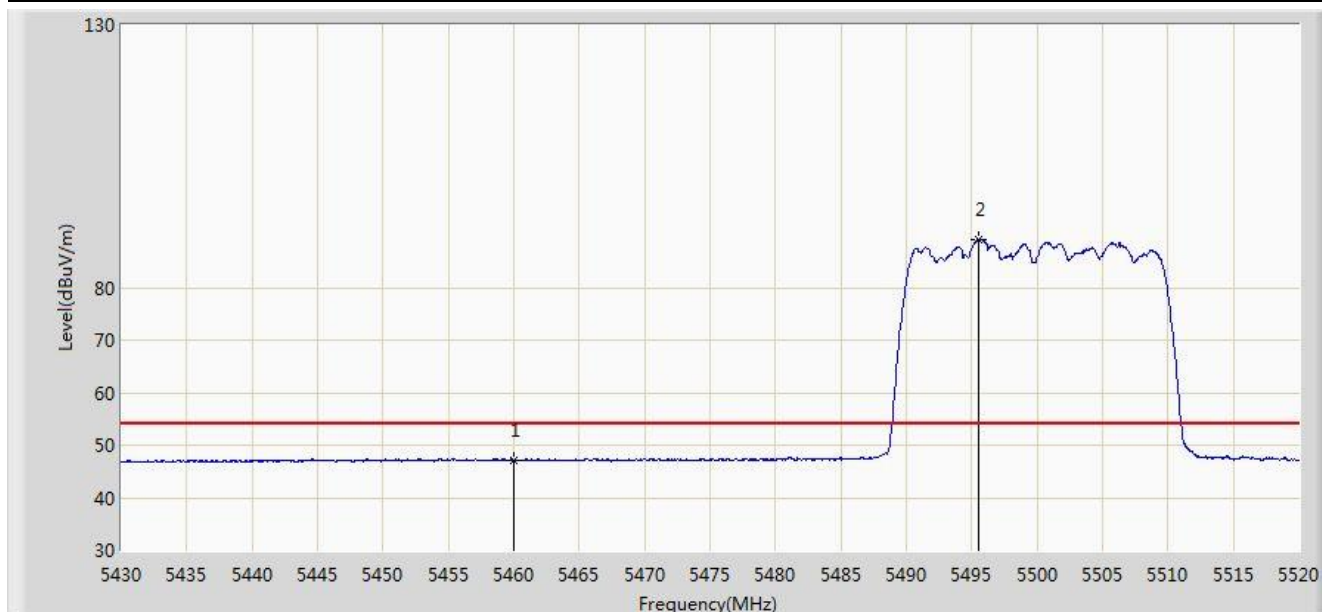


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.213	43.033	-6.787	54.000	4.180	AV
2		*	5495.520	89.164	84.904	N/A	N/A	4.261	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

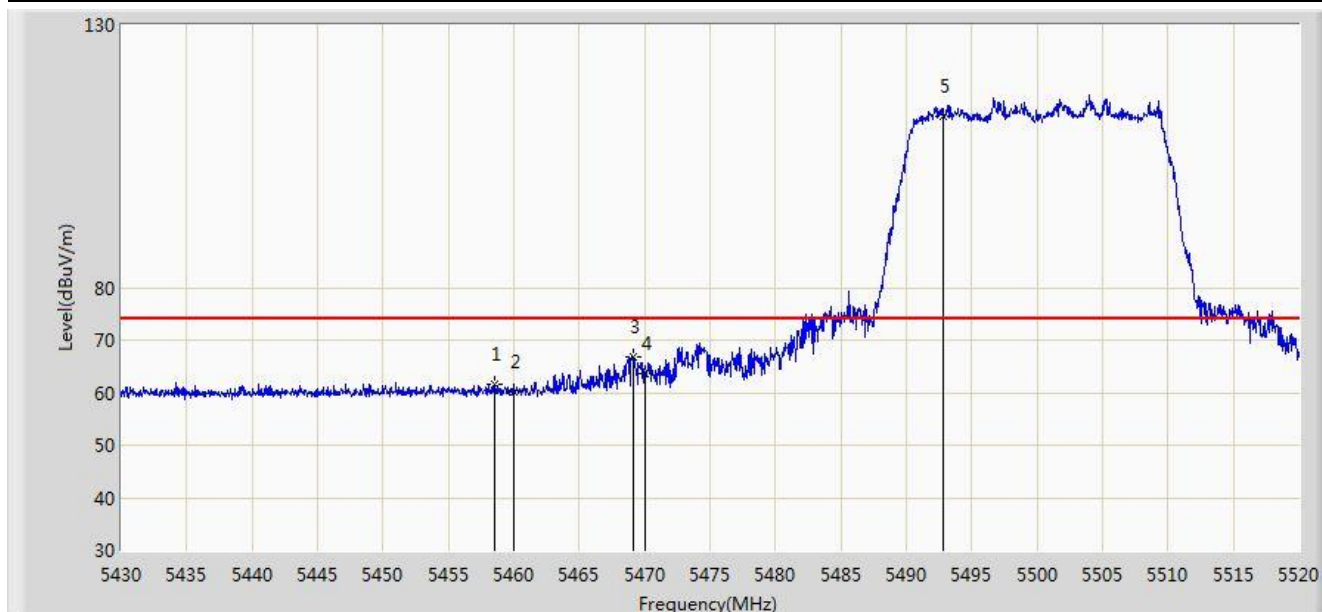


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.485	61.542	57.365	-12.458	74.000	4.177	PK
2			5460.000	60.080	55.900	-13.920	74.000	4.180	PK
3			5469.105	66.864	62.664	-1.336	68.200	4.201	PK
4			5470.000	63.687	59.485	-4.513	68.200	4.202	PK
5		*	5492.820	112.639	108.385	N/A	N/A	4.254	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

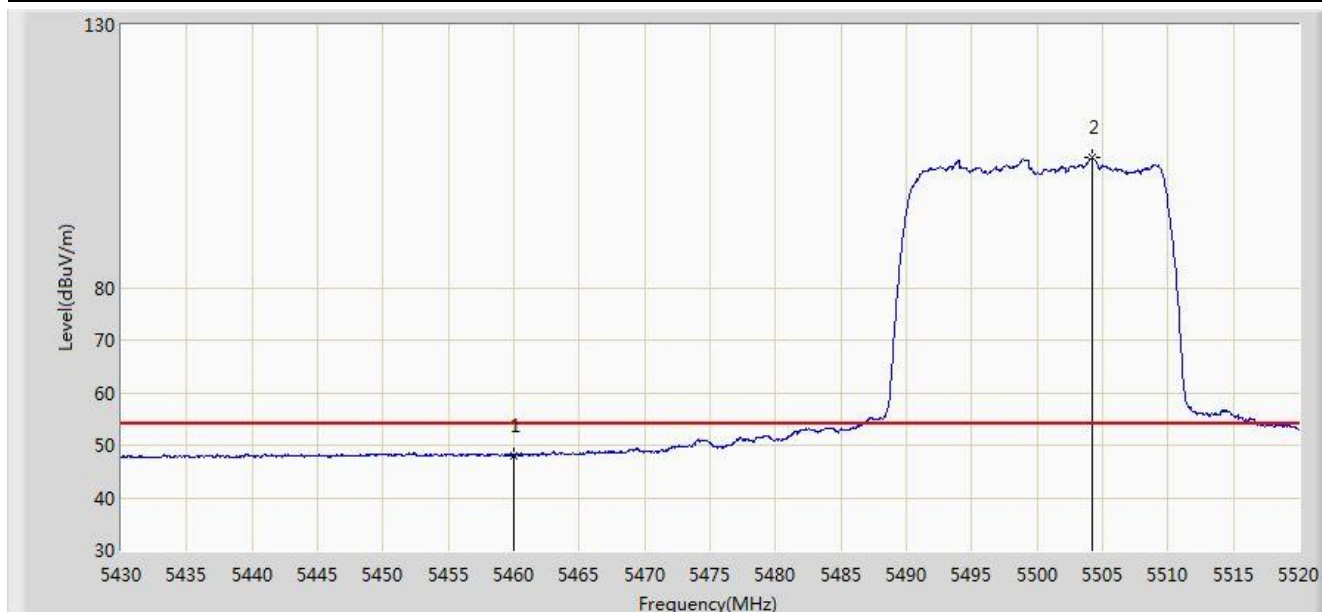


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.095	43.915	-5.905	54.000	4.180	AV
2		*	5504.205	104.692	100.408	N/A	N/A	4.284	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

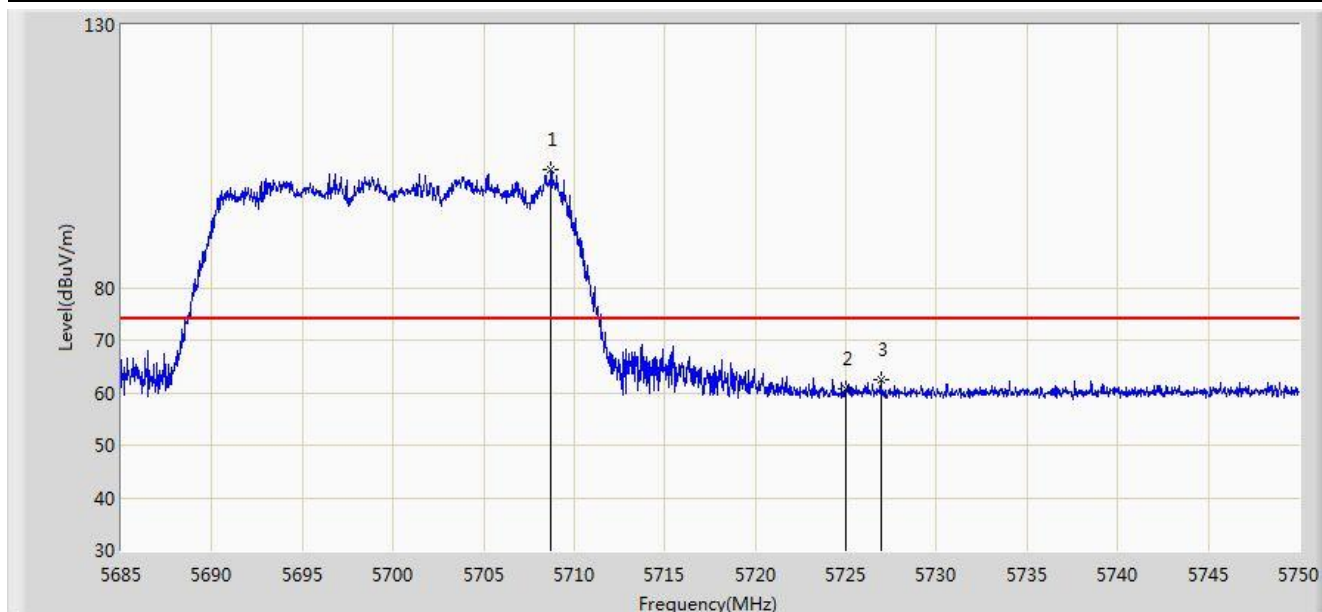


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5708.725	102.556	97.631	N/A	N/A	4.924	PK
2			5725.000	60.595	55.566	-13.405	74.000	5.029	PK
3			5726.925	62.471	57.430	-11.529	74.000	5.040	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

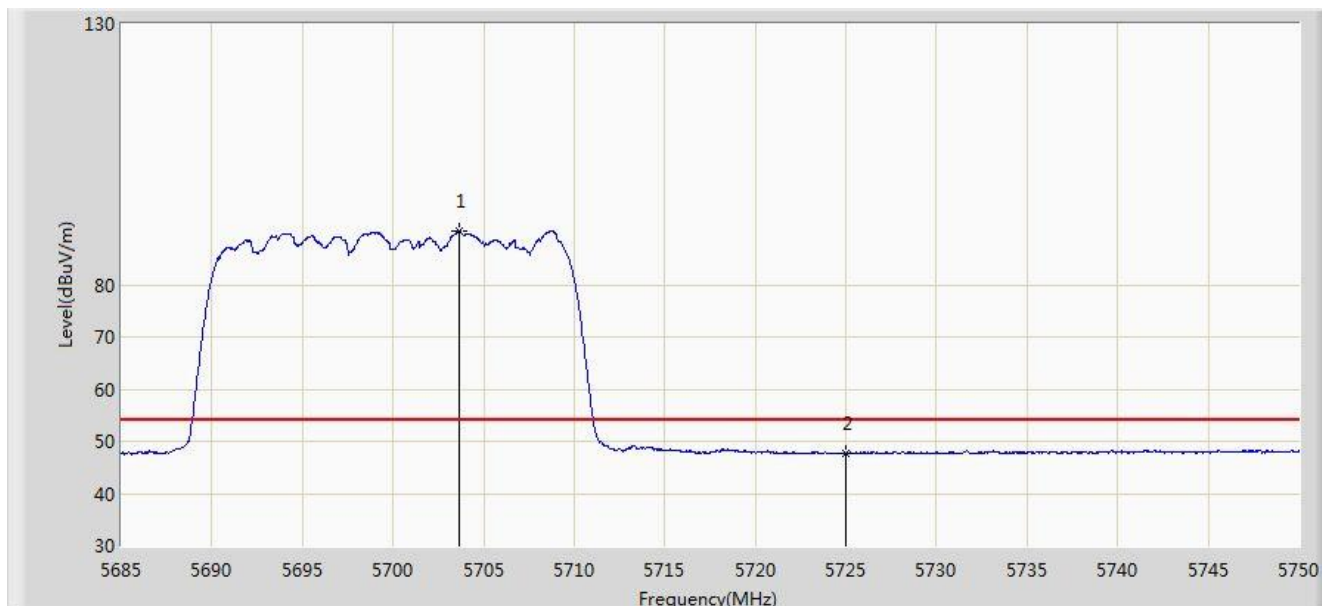


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.623	90.408	85.510	N/A	N/A	4.897	AV
2			5725.000	47.683	42.654	-6.317	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

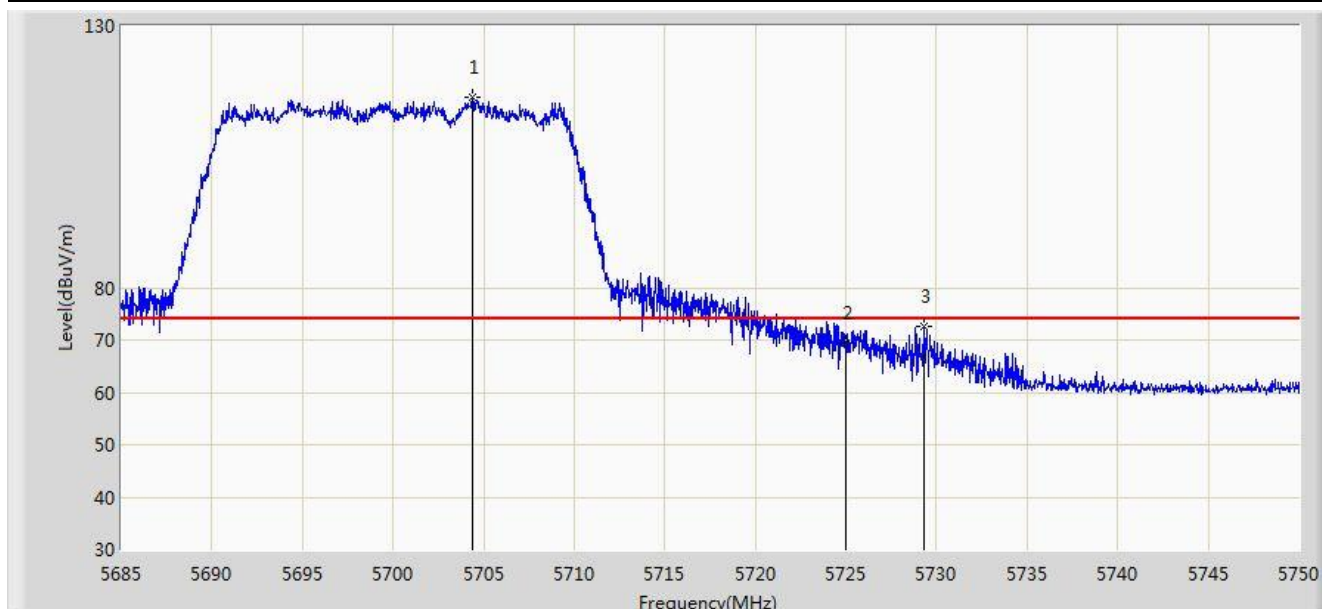

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.370	116.370	111.469	N/A	N/A	4.902	PK
2			5725.000	69.494	64.465	-4.506	74.000	5.029	PK
3			5729.297	72.578	67.522	-1.422	74.000	5.056	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.425	104.754	99.905	N/A	N/A	4.849	AV
2			5725.000	52.328	47.299	-1.672	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5745MHz	

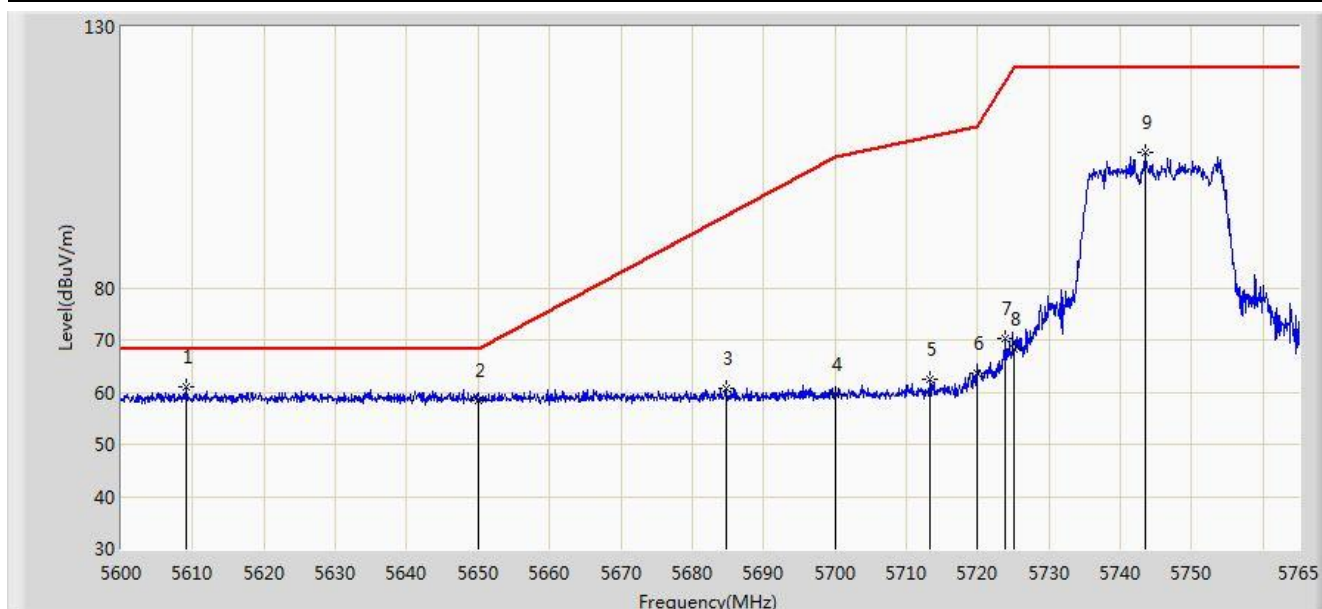


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5609.075	61.048	56.499	-7.152	68.200	4.549	PK
2			5650.000	58.514	53.843	-9.686	68.200	4.671	PK
3			5684.810	60.744	55.937	-33.250	93.994	4.807	PK
4			5700.000	59.491	54.613	-45.709	105.200	4.878	PK
5			5713.272	62.486	57.532	-46.433	108.918	4.953	PK
6			5720.000	63.716	58.719	-47.084	110.800	4.997	PK
7			5723.915	70.420	65.398	-49.307	119.727	5.022	PK
8			5725.000	68.359	63.330	-53.841	122.200	5.029	PK
9			5743.467	105.879	100.733	N/A	N/A	5.147	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5745MHz	

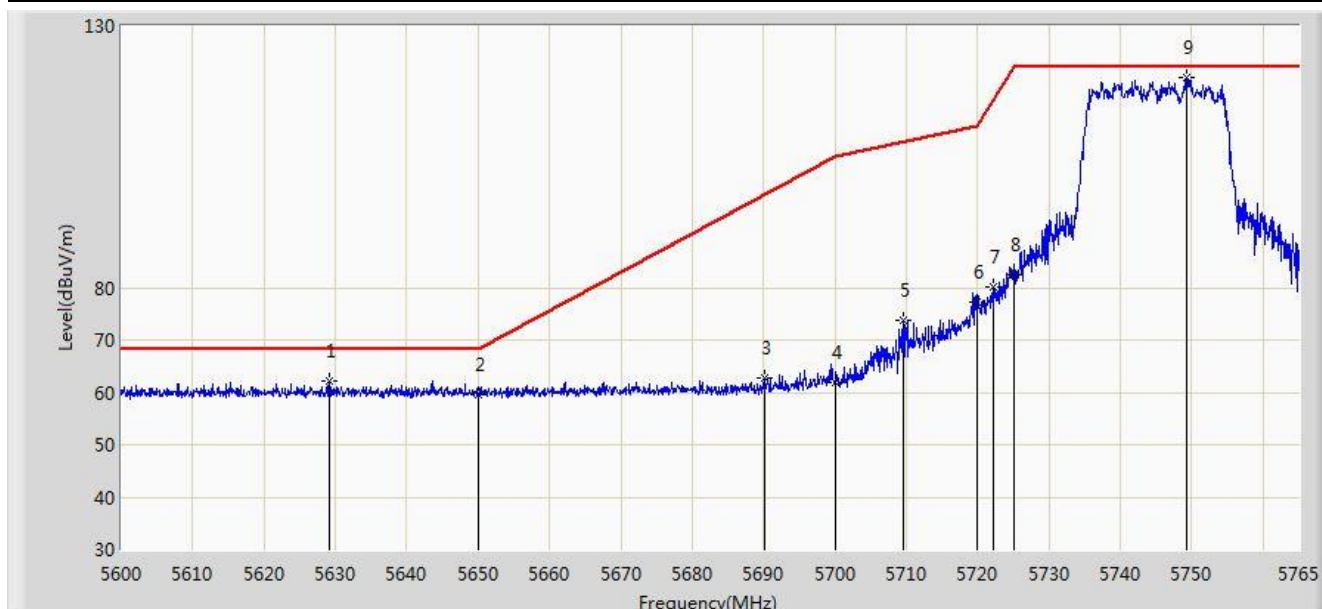


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5629.205	62.283	57.676	-5.917	68.200	4.607	PK
2			5650.000	59.549	54.878	-8.651	68.200	4.671	PK
3			5690.090	62.873	58.045	-35.020	97.892	4.828	PK
4			5700.000	62.021	57.143	-43.179	105.200	4.878	PK
5			5709.643	73.673	68.743	-34.229	107.902	4.930	PK
6			5720.000	77.179	72.182	-33.621	110.800	4.997	PK
7			5722.265	80.056	75.045	-35.909	115.965	5.012	PK
8			5725.000	82.468	77.439	-39.732	122.200	5.029	PK
9		*	5749.325	120.072	114.893	N/A	N/A	5.179	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5825MHz	

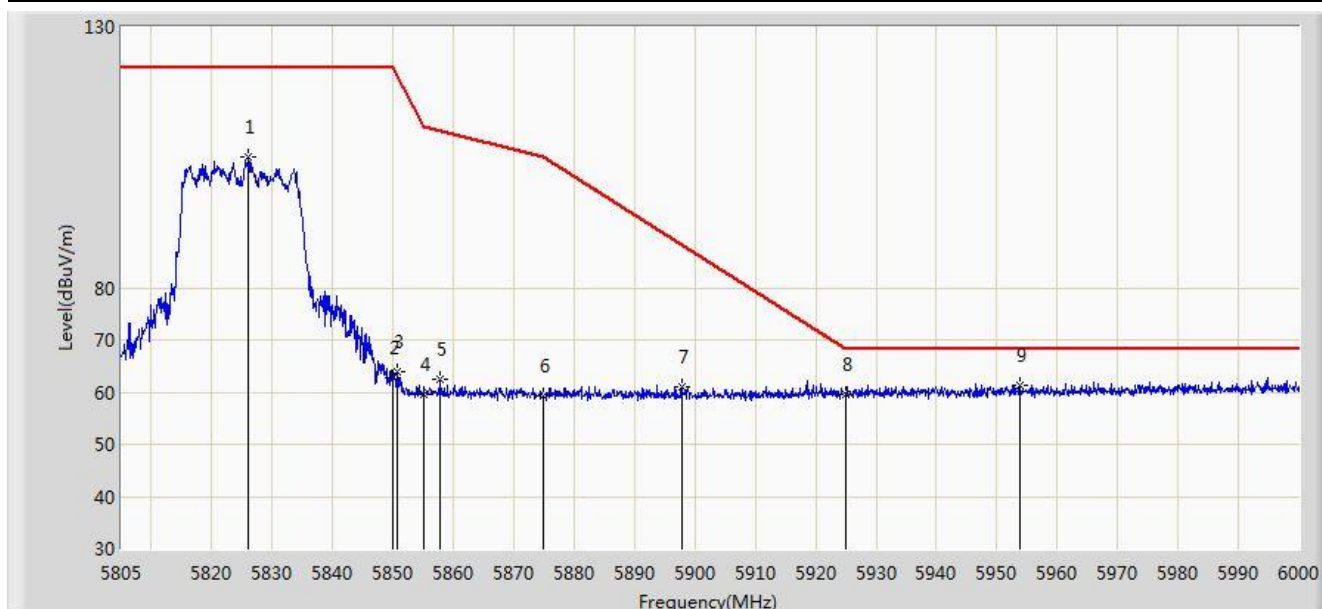


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.060	105.132	99.538	N/A	N/A	5.594	PK
2			5850.000	62.831	57.105	-59.369	122.200	5.726	PK
3			5850.728	63.870	58.141	-56.670	120.540	5.729	PK
4			5855.000	59.709	53.963	-51.091	110.800	5.746	PK
5			5857.845	62.528	56.770	-47.474	110.002	5.759	PK
6			5875.000	59.171	53.351	-46.029	105.200	5.820	PK
7			5897.820	61.067	55.170	-27.207	88.274	5.898	PK
8			5925.000	59.446	53.480	-8.754	68.200	5.967	PK
9		*	5953.785	61.341	55.308	-6.859	68.200	6.033	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5825MHz	

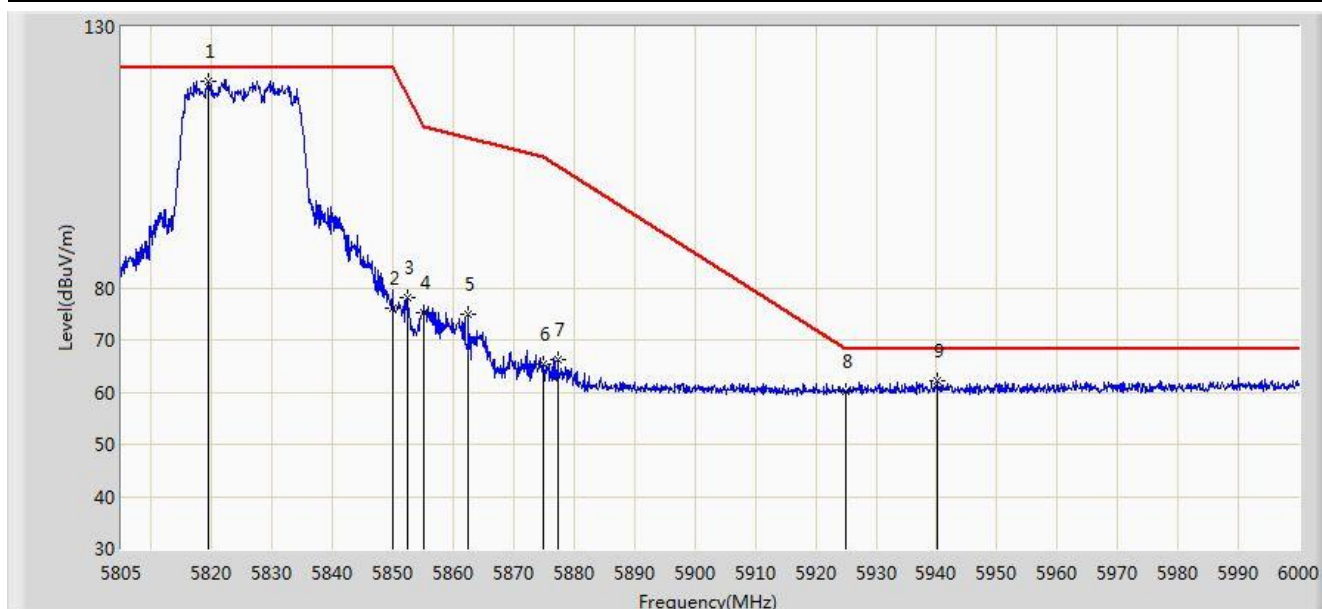


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.527	119.648	114.092	N/A	N/A	5.556	PK
2			5850.000	76.017	70.291	-46.183	122.200	5.726	PK
3			5852.288	78.135	72.400	-38.847	116.982	5.735	PK
4			5855.000	75.317	69.571	-35.483	110.800	5.746	PK
5			5862.428	74.830	69.053	-33.888	108.718	5.776	PK
6			5875.000	65.346	59.526	-39.854	105.200	5.820	PK
7			5877.248	66.201	60.373	-37.329	103.530	5.828	PK
8			5925.000	60.013	54.047	-8.187	68.200	5.967	PK
9			5940.135	62.275	56.271	-5.925	68.200	6.004	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

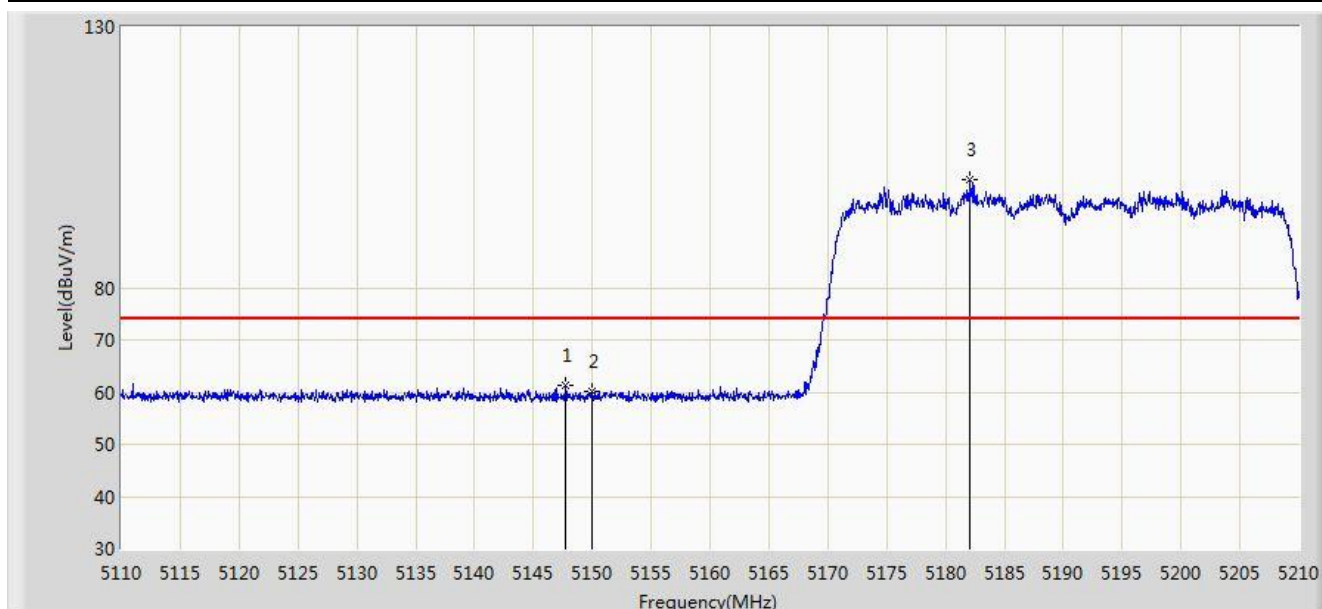


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.750	61.412	57.236	-12.588	74.000	4.176	PK
2			5150.000	60.017	55.848	-13.983	74.000	4.170	PK
3		*	5182.100	100.856	96.795	N/A	N/A	4.061	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

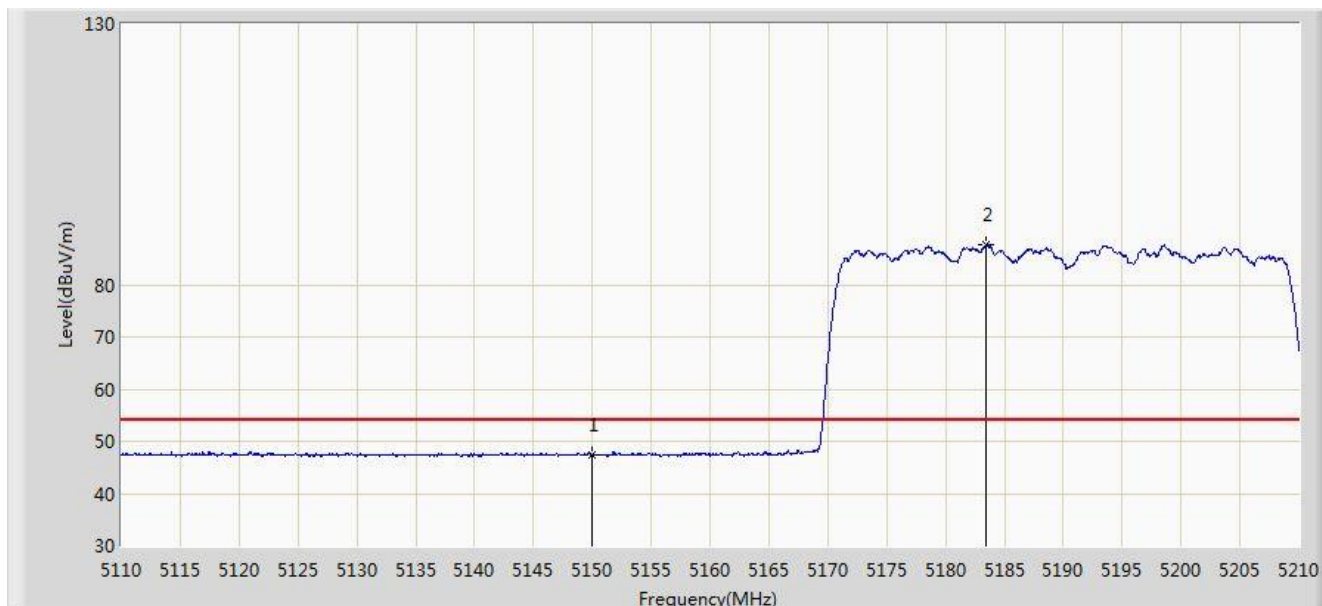


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.403	43.234	-6.597	54.000	4.170	AV
2		*	5183.450	87.732	83.675	N/A	N/A	4.057	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

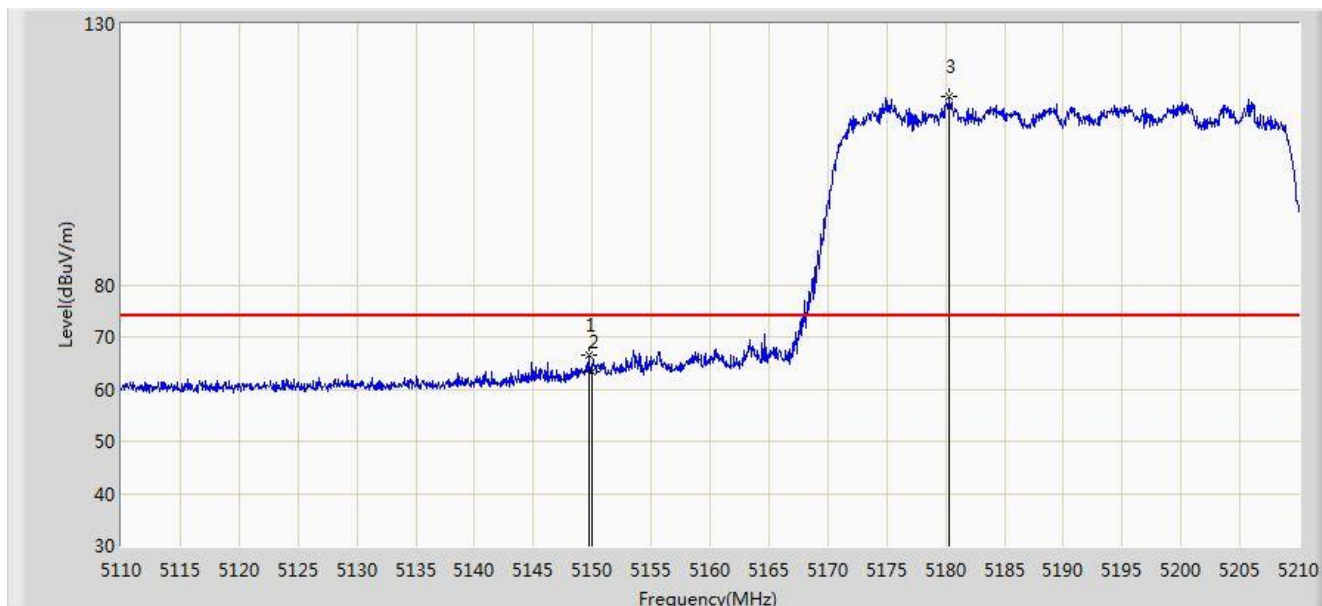


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.700	66.639	62.469	-7.361	74.000	4.170	PK
2			5150.000	63.338	59.169	-10.662	74.000	4.170	PK
3		*	5180.350	116.032	111.964	N/A	N/A	4.068	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 06:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

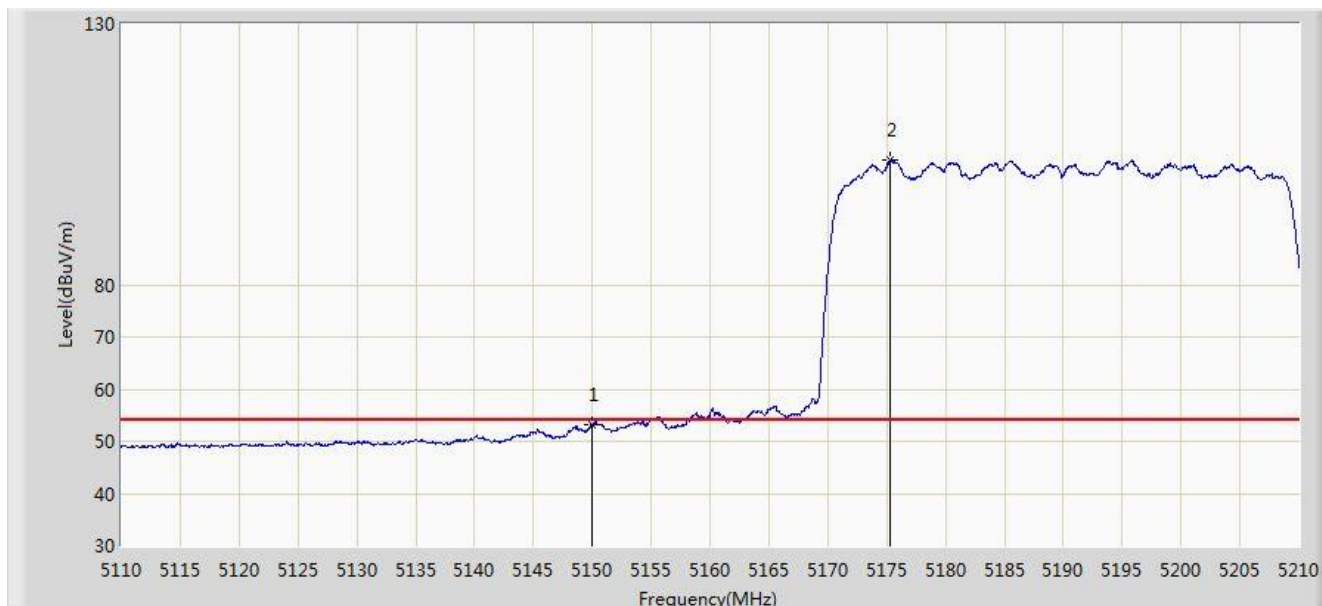


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.074	48.905	-0.926	54.000	4.170	AV
2		*	5175.350	103.839	99.754	N/A	N/A	4.085	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5310MHz	

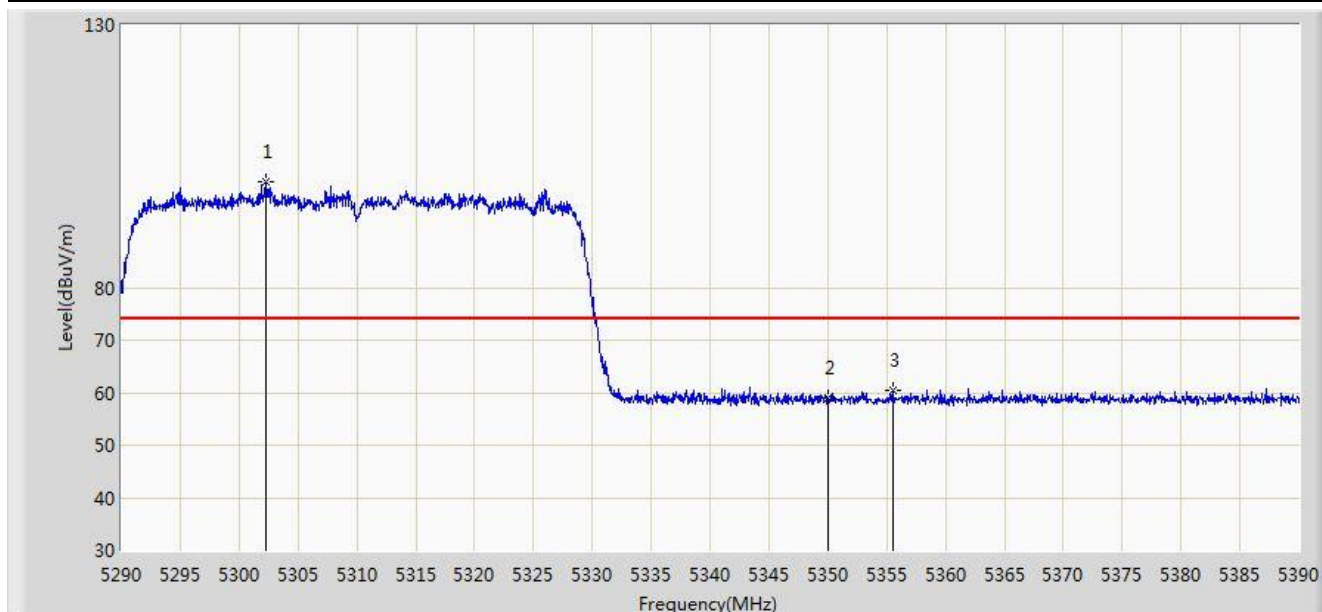


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.250	100.082	96.267	N/A	N/A	3.815	PK
2			5350.000	58.855	54.950	-15.145	74.000	3.904	PK
3			5355.500	60.469	56.554	-13.531	74.000	3.915	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5310MHz	

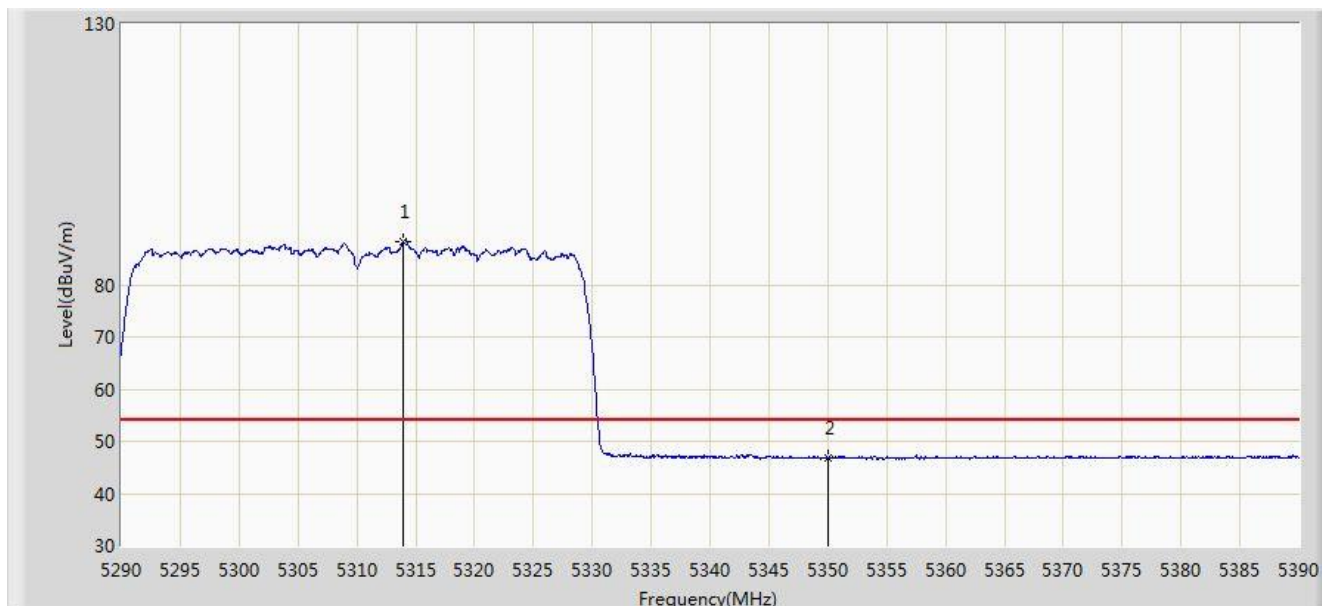


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.950	88.285	84.448	N/A	N/A	3.838	AV
2			5350.000	46.813	42.908	-7.187	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5310MHz	

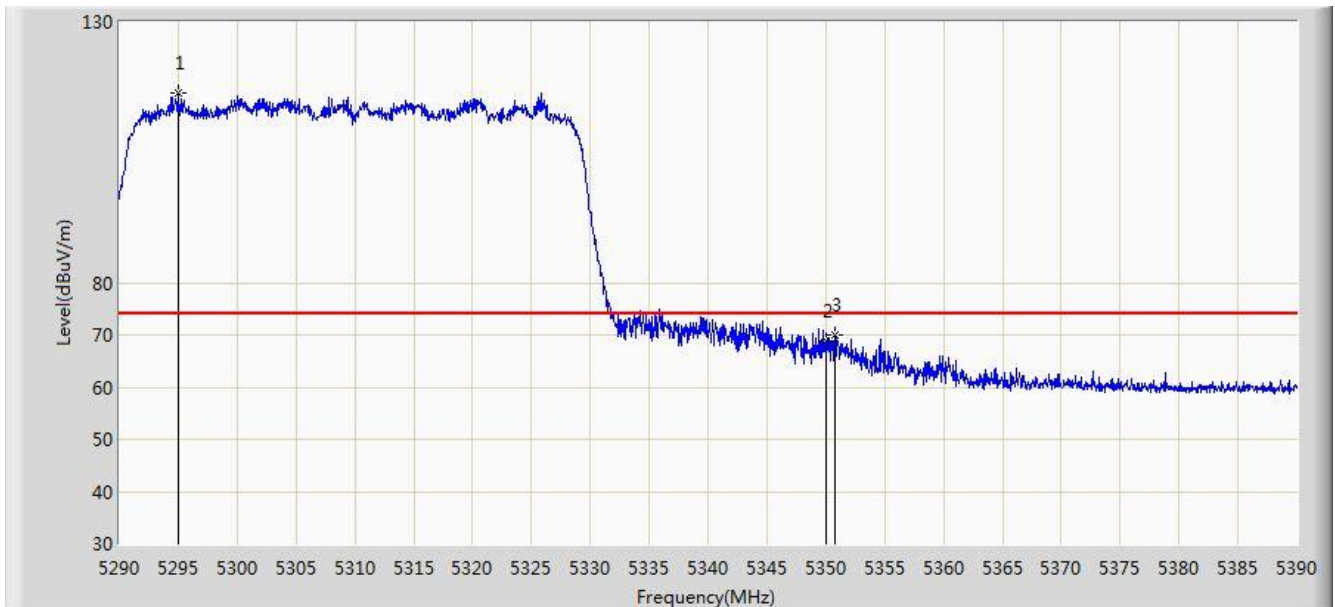


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.950	116.315	112.498	N/A	N/A	3.816	PK
2			5350.000	68.896	64.991	-5.104	74.000	3.904	PK
3			5350.750	70.059	66.153	-3.941	74.000	3.906	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5310MHz	

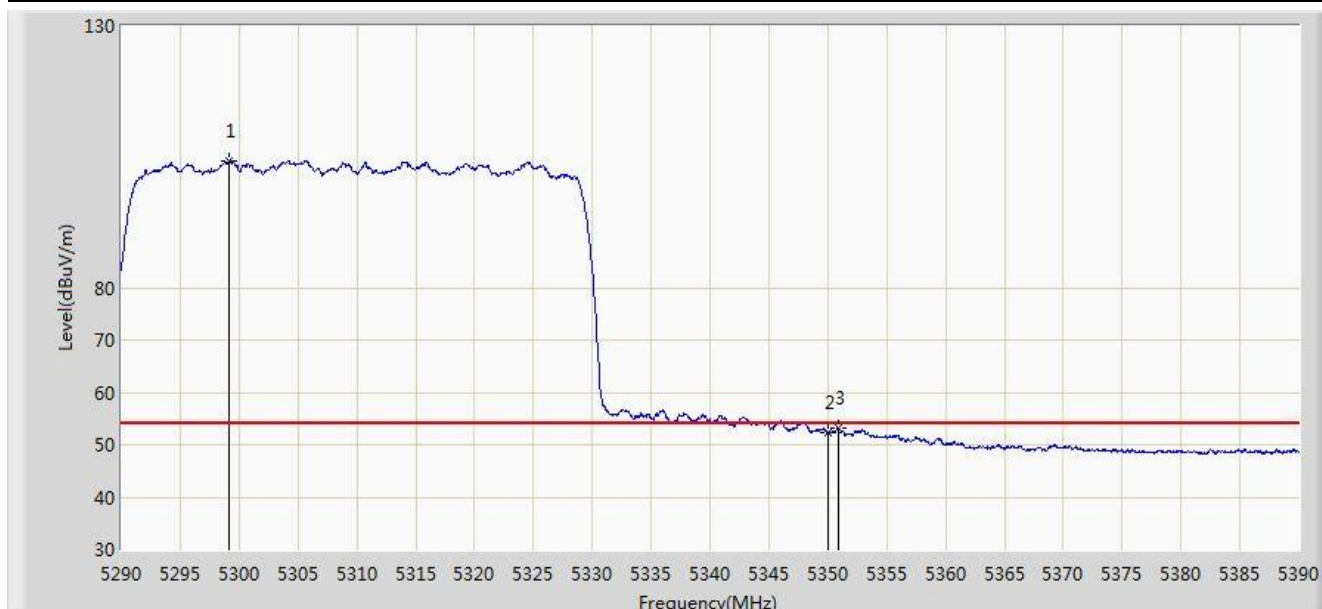


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.200	104.226	100.412	N/A	N/A	3.814	AV
2			5350.000	52.402	48.497	-1.598	54.000	3.904	AV
3			5350.850	53.195	49.289	-0.805	54.000	3.906	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5510MHz	

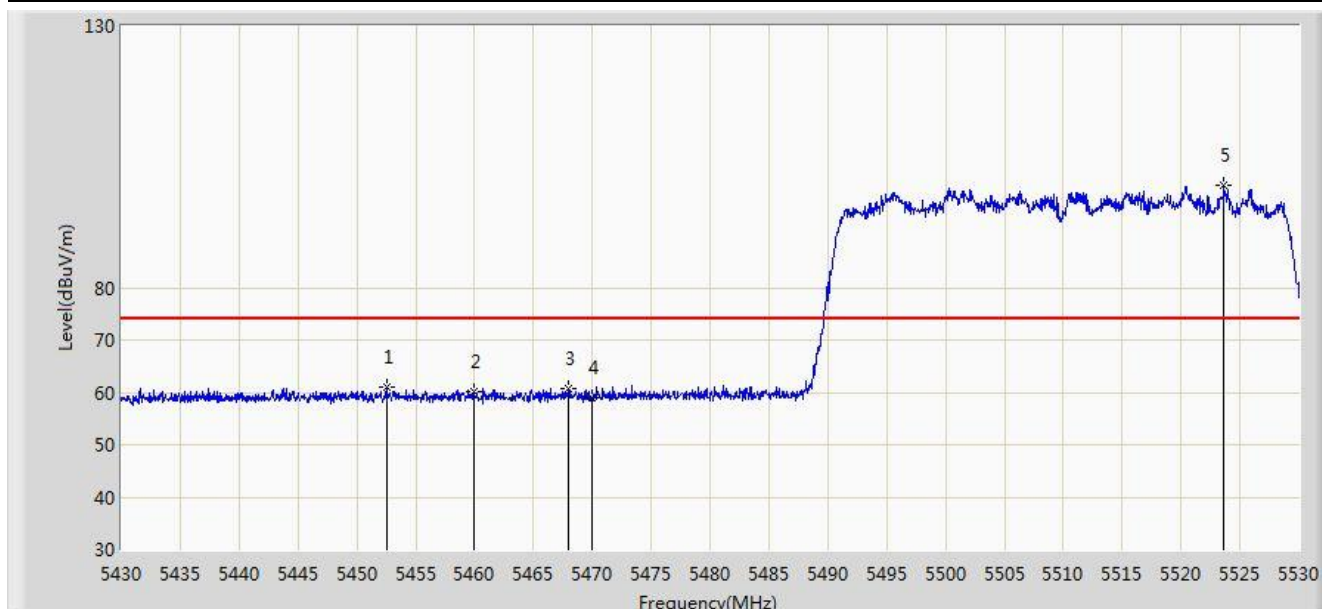


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.500	61.108	56.945	-12.892	74.000	4.163	PK
2			5460.000	60.086	55.906	-13.914	74.000	4.180	PK
3			5467.950	60.634	56.436	-7.566	68.200	4.198	PK
4			5470.000	58.954	54.752	-9.246	68.200	4.202	PK
5		*	5523.650	99.466	95.124	N/A	N/A	4.342	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5510MHz	

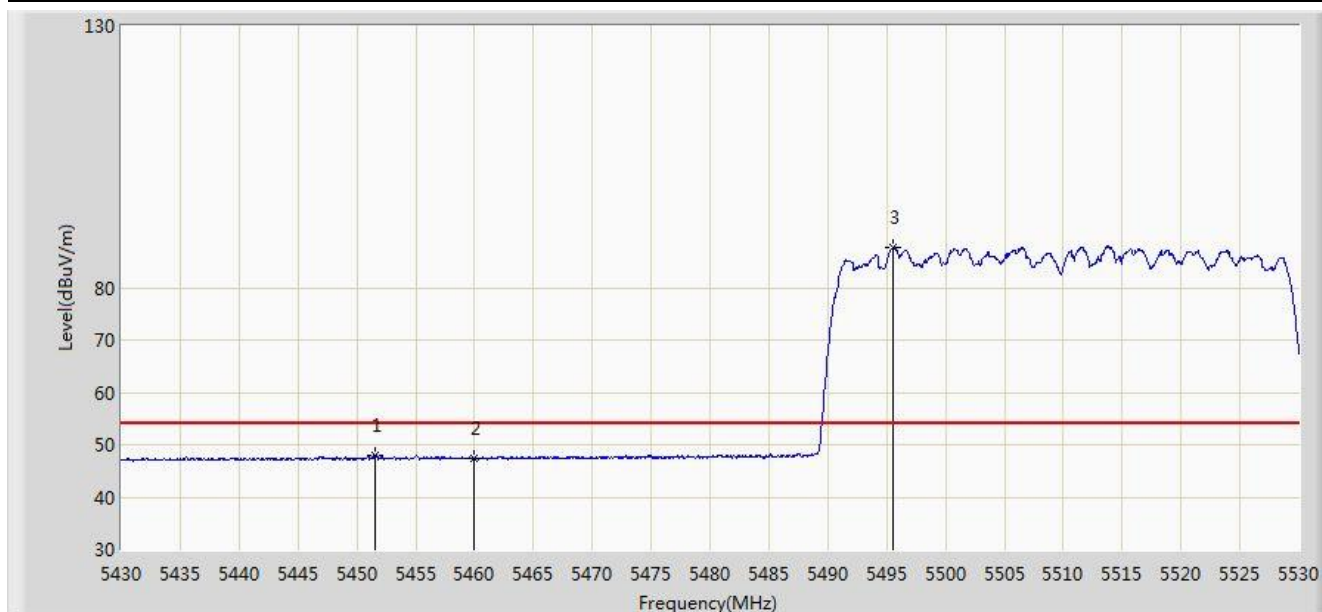


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.600	47.950	43.790	-6.050	54.000	4.160	AV
2			5460.000	47.450	43.270	-6.550	54.000	4.180	AV
3		*	5495.550	87.650	83.390	N/A	N/A	4.261	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5510MHz	

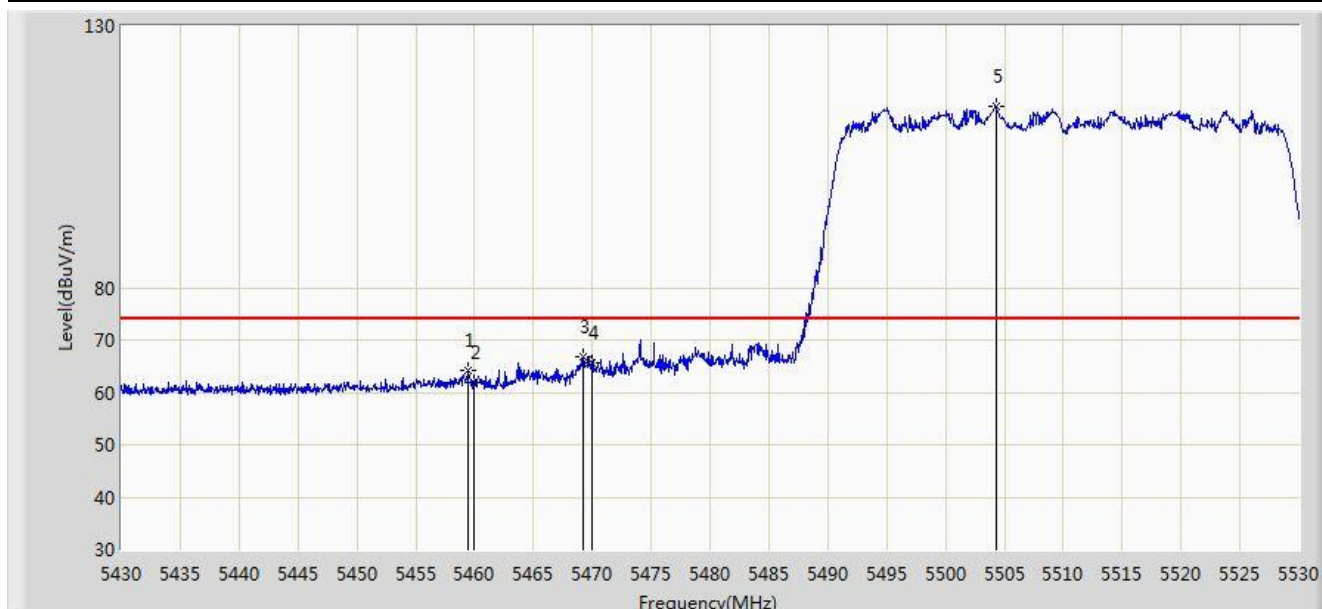


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.450	64.241	60.062	-9.759	74.000	4.179	PK
2			5460.000	61.872	57.692	-12.128	74.000	4.180	PK
3			5469.250	66.878	62.677	-1.322	68.200	4.201	PK
4			5470.000	65.641	61.439	-2.559	68.200	4.202	PK
5		*	5504.250	114.656	110.372	N/A	N/A	4.284	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5510MHz	

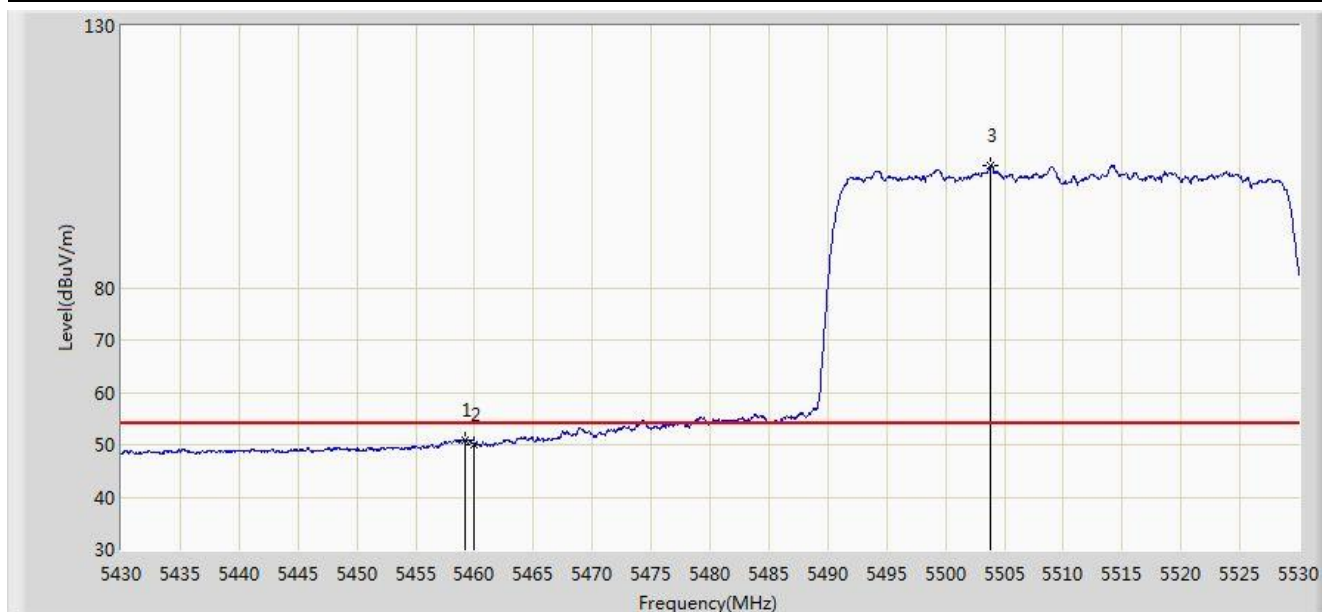

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.150	50.987	46.809	-3.013	54.000	4.178	AV
2			5460.000	50.116	45.936	-3.884	54.000	4.180	AV
3		*	5503.800	103.198	98.915	N/A	N/A	4.283	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)