






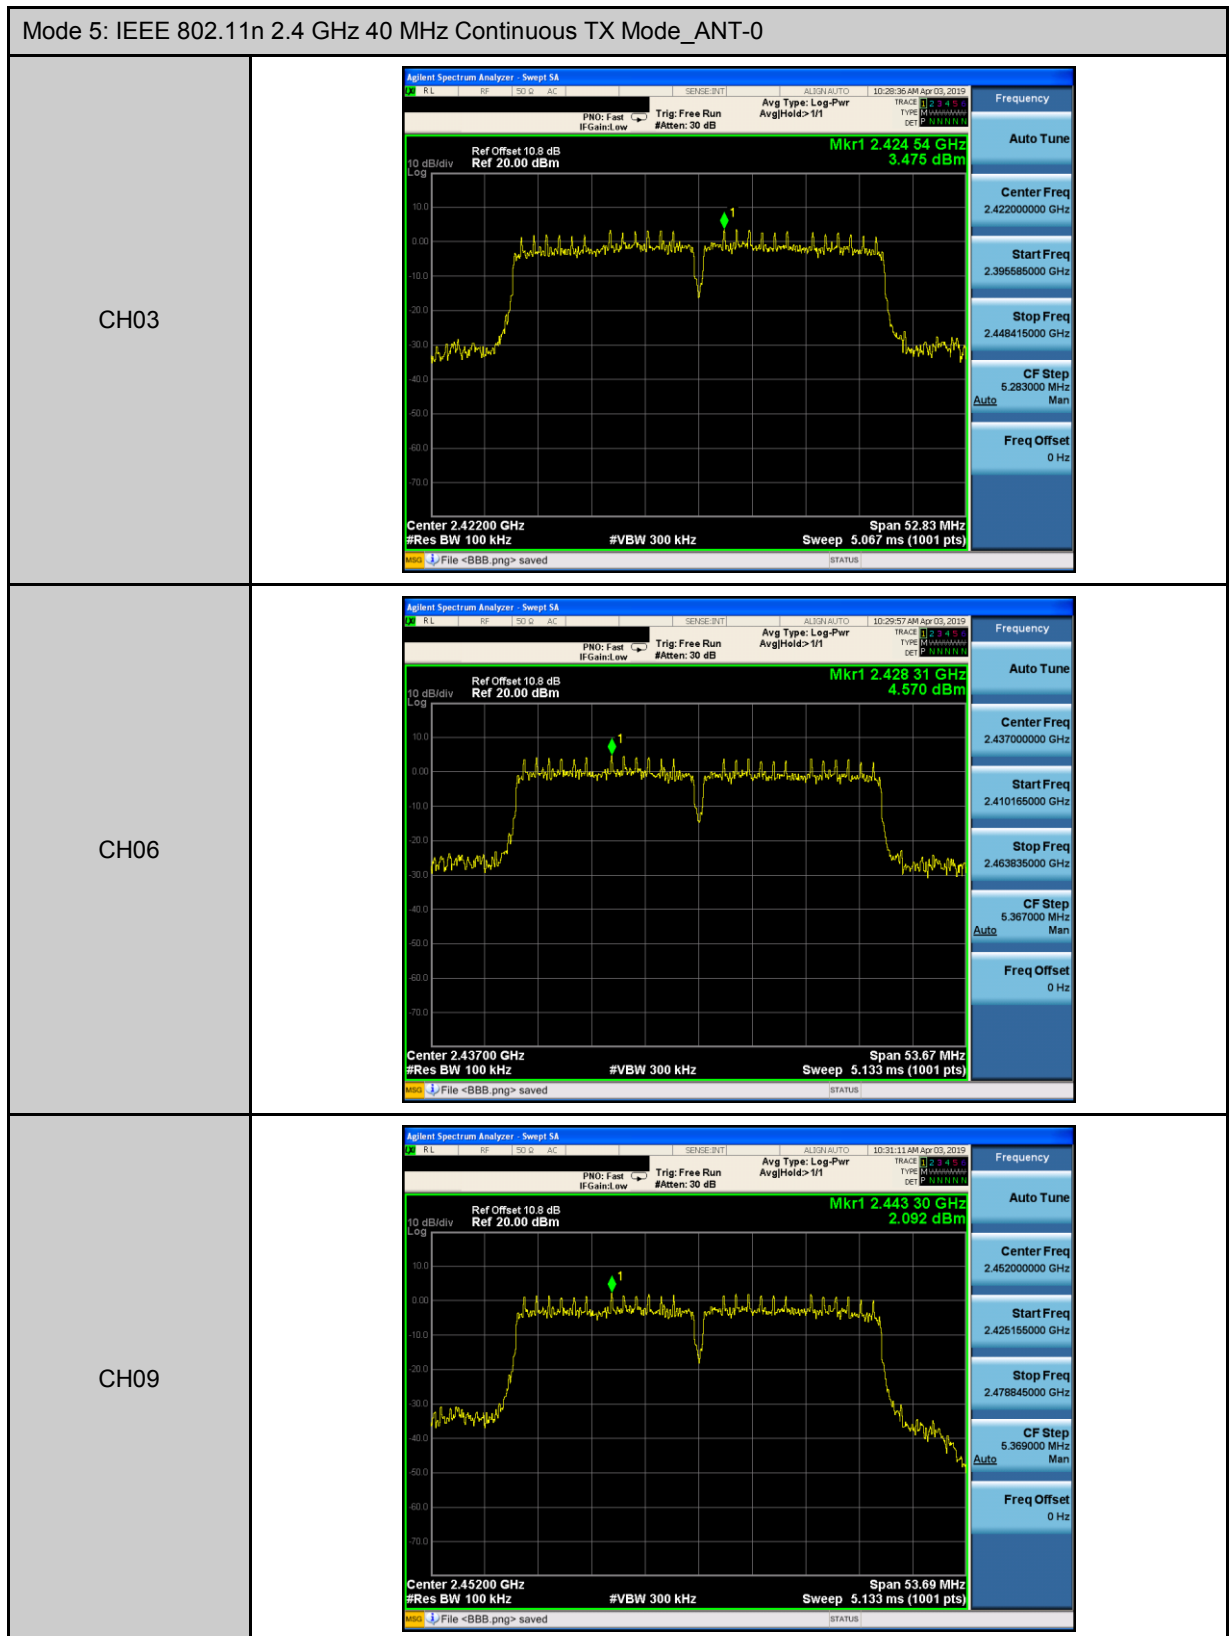

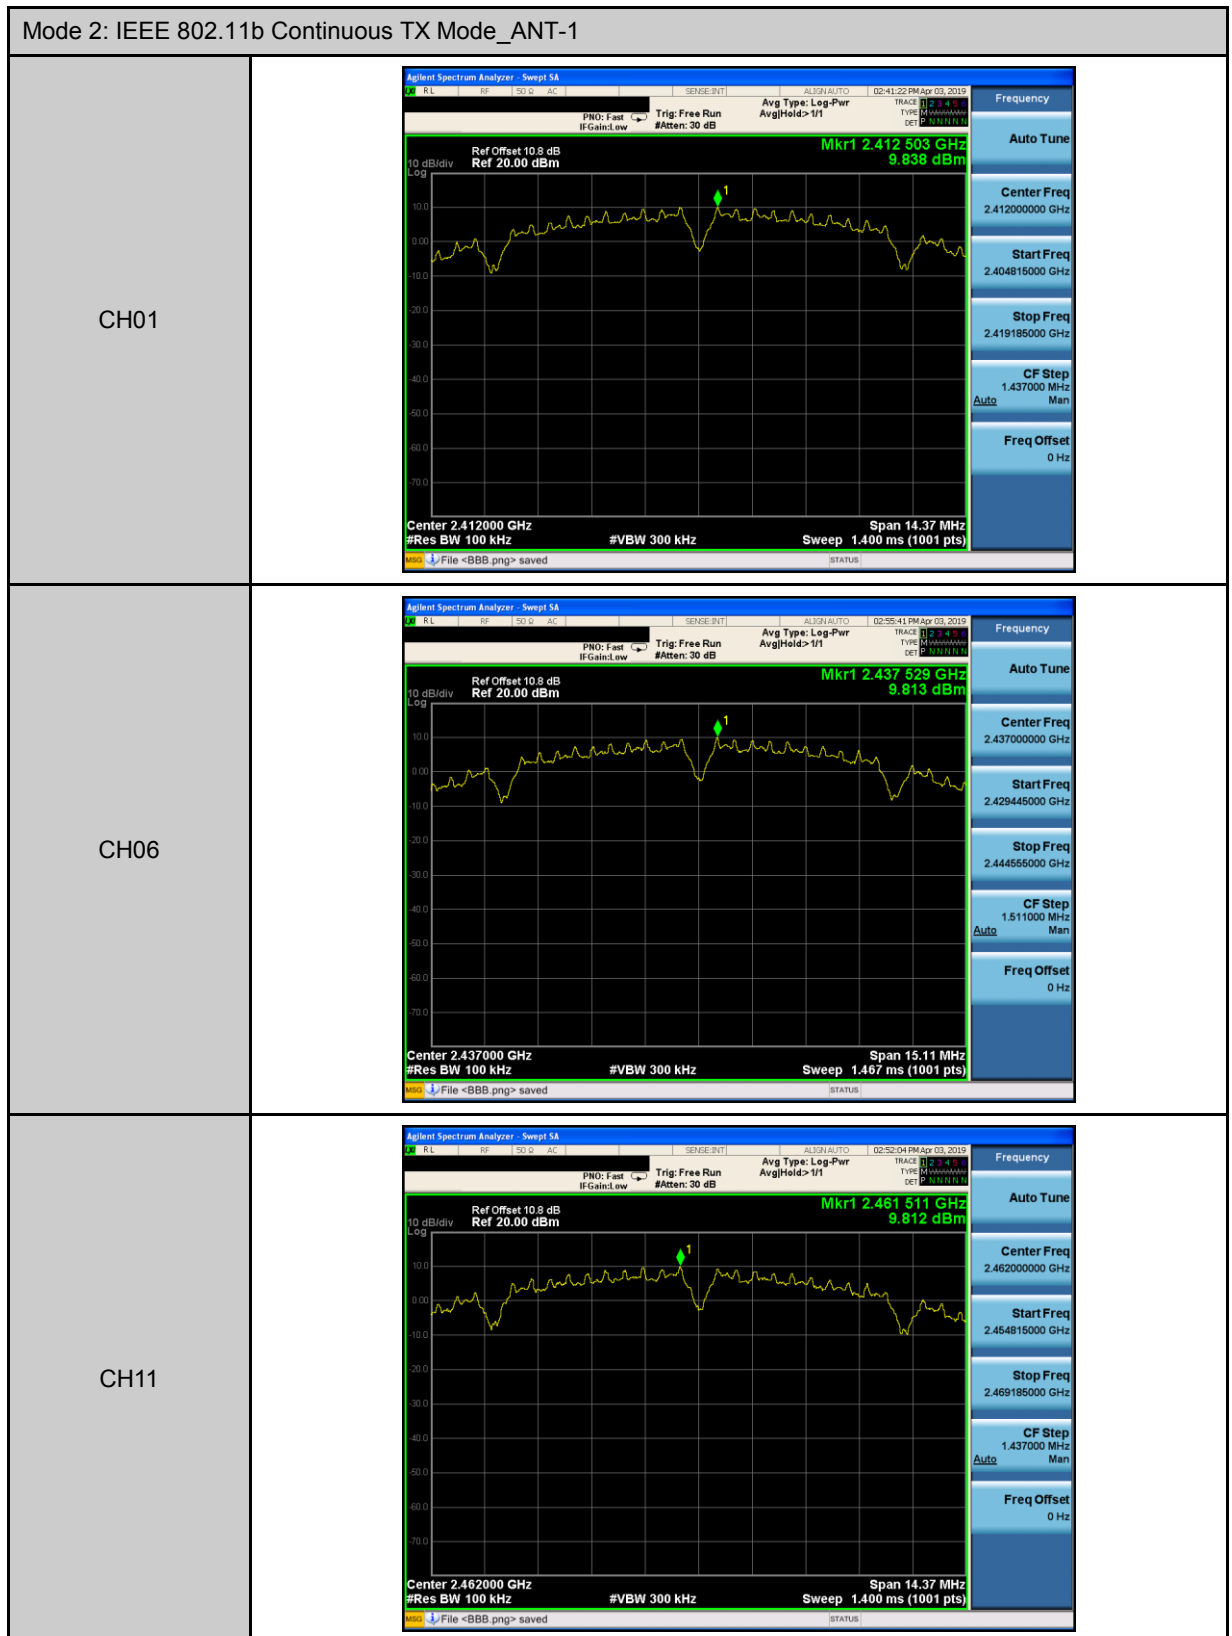

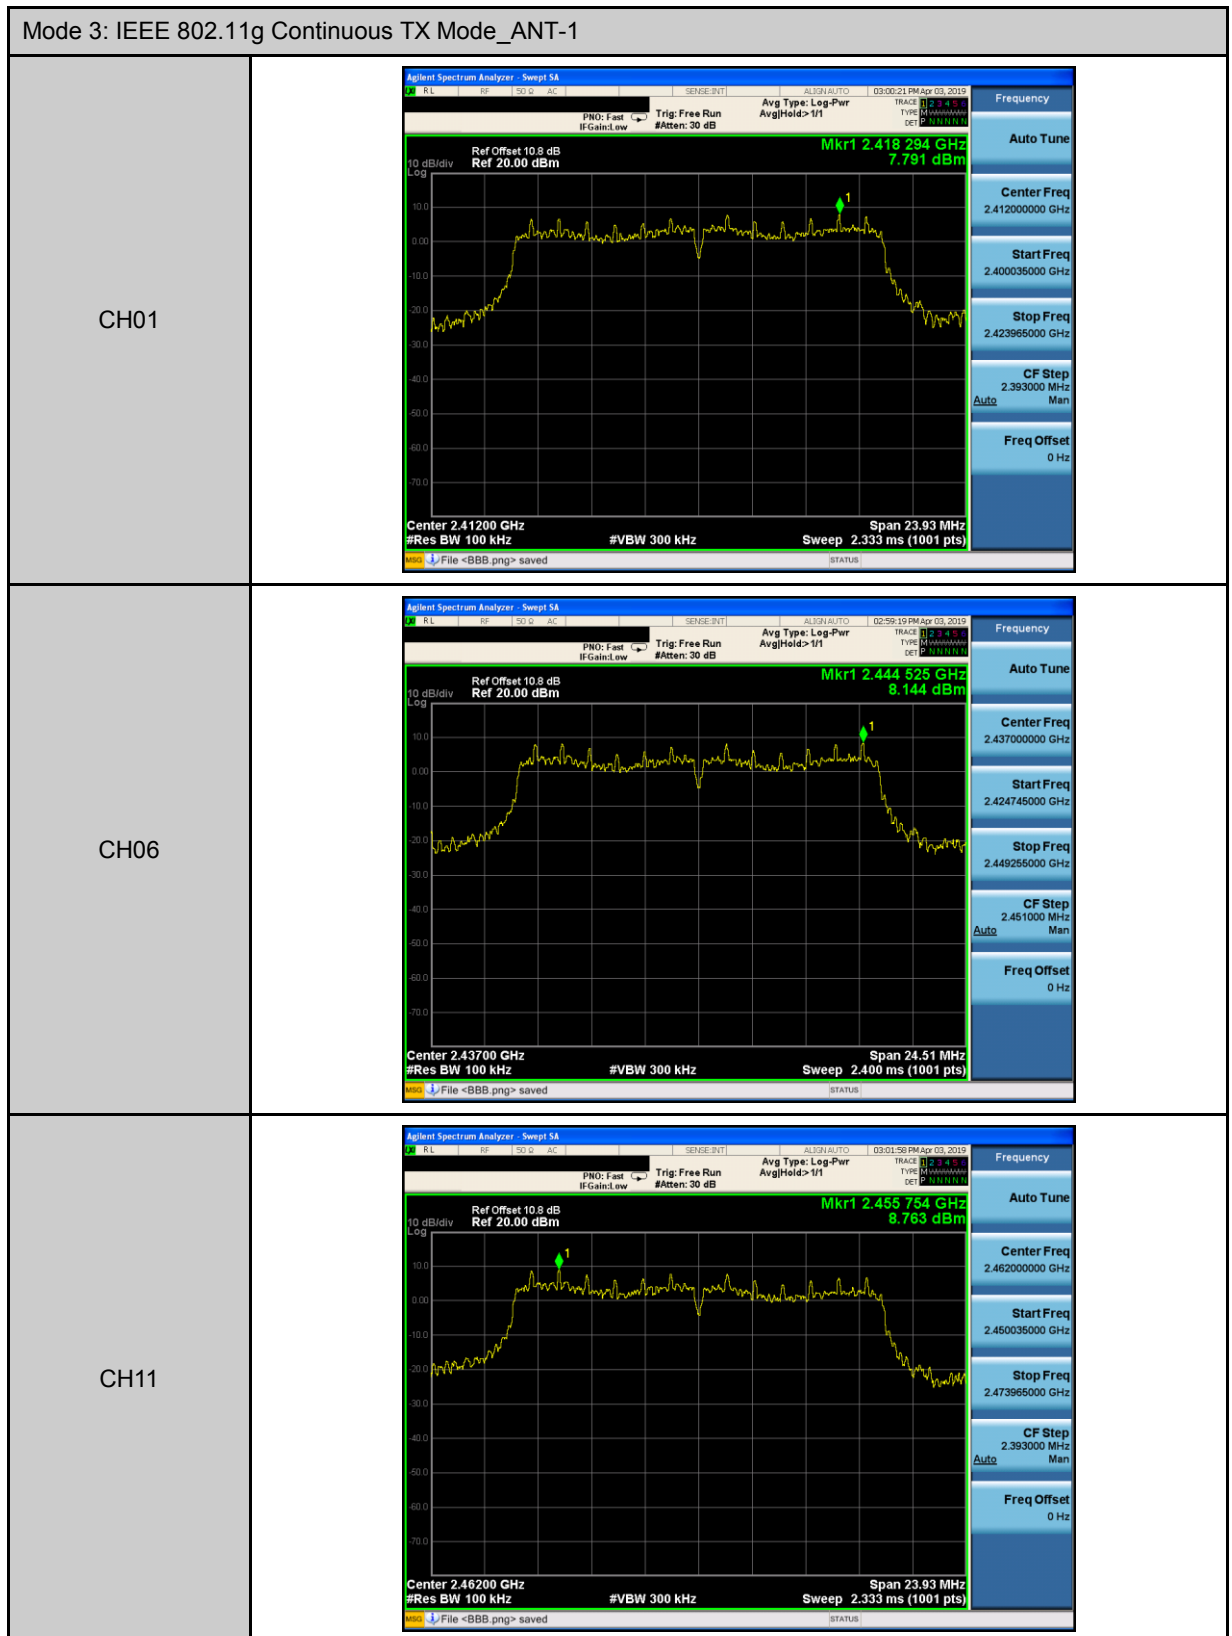

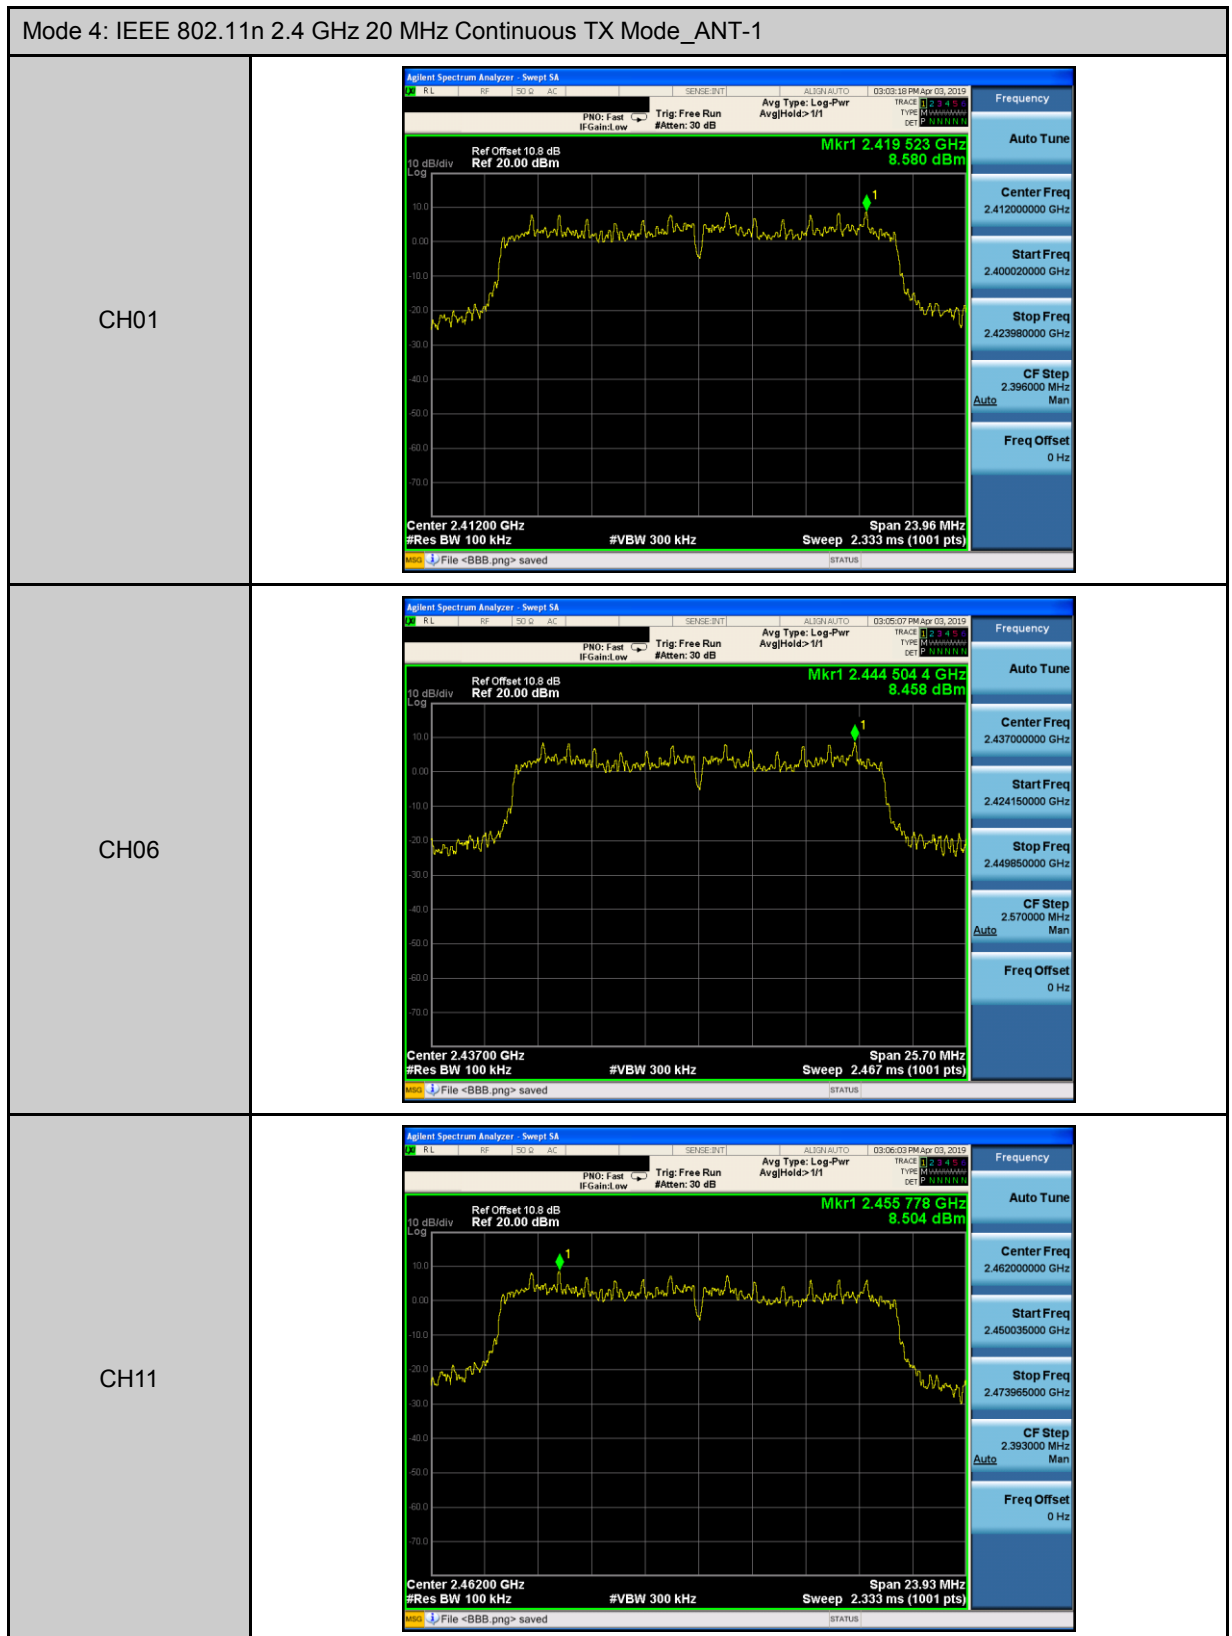


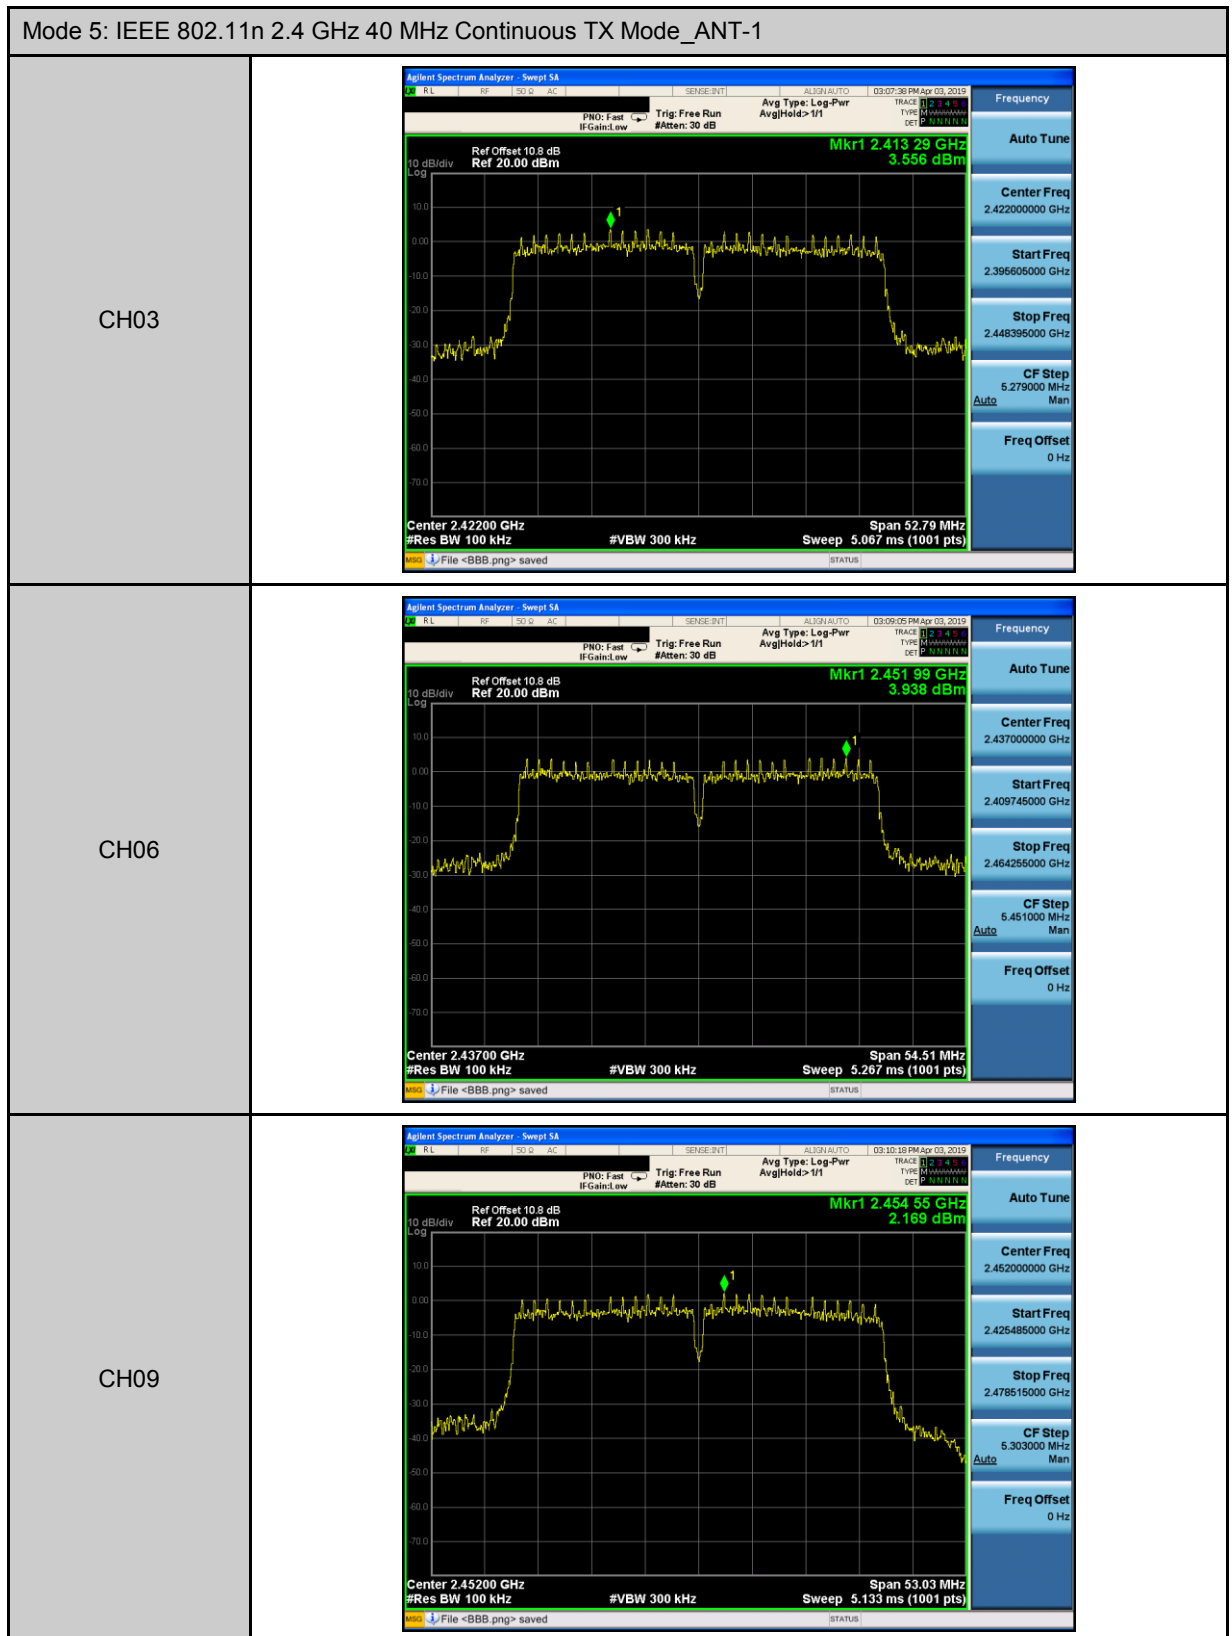


Conducted Band Edge


Mode 2: IEEE 802.11b Continuous TX Mode_ANT-0


CH01

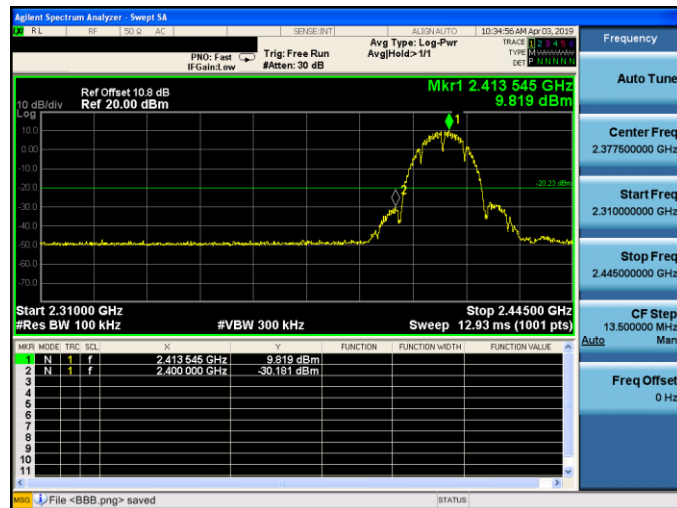



CH11

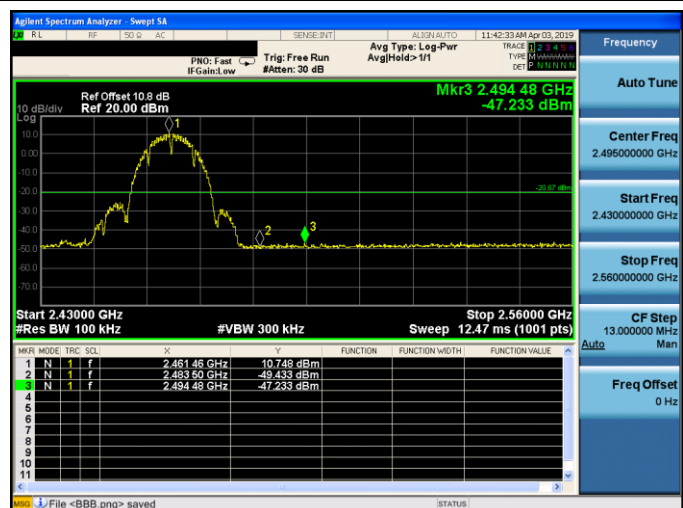


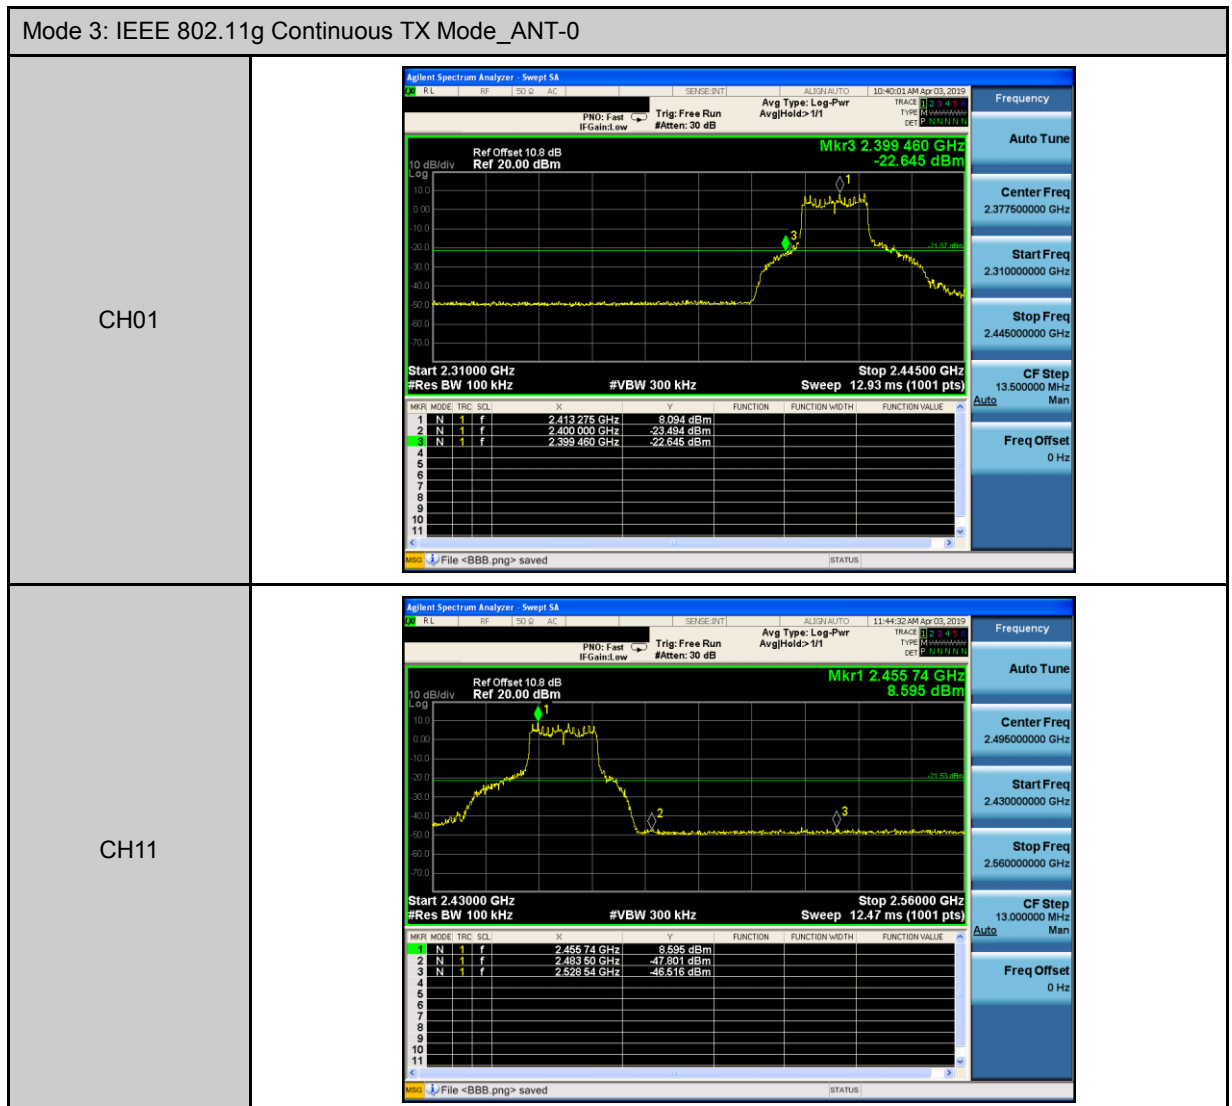


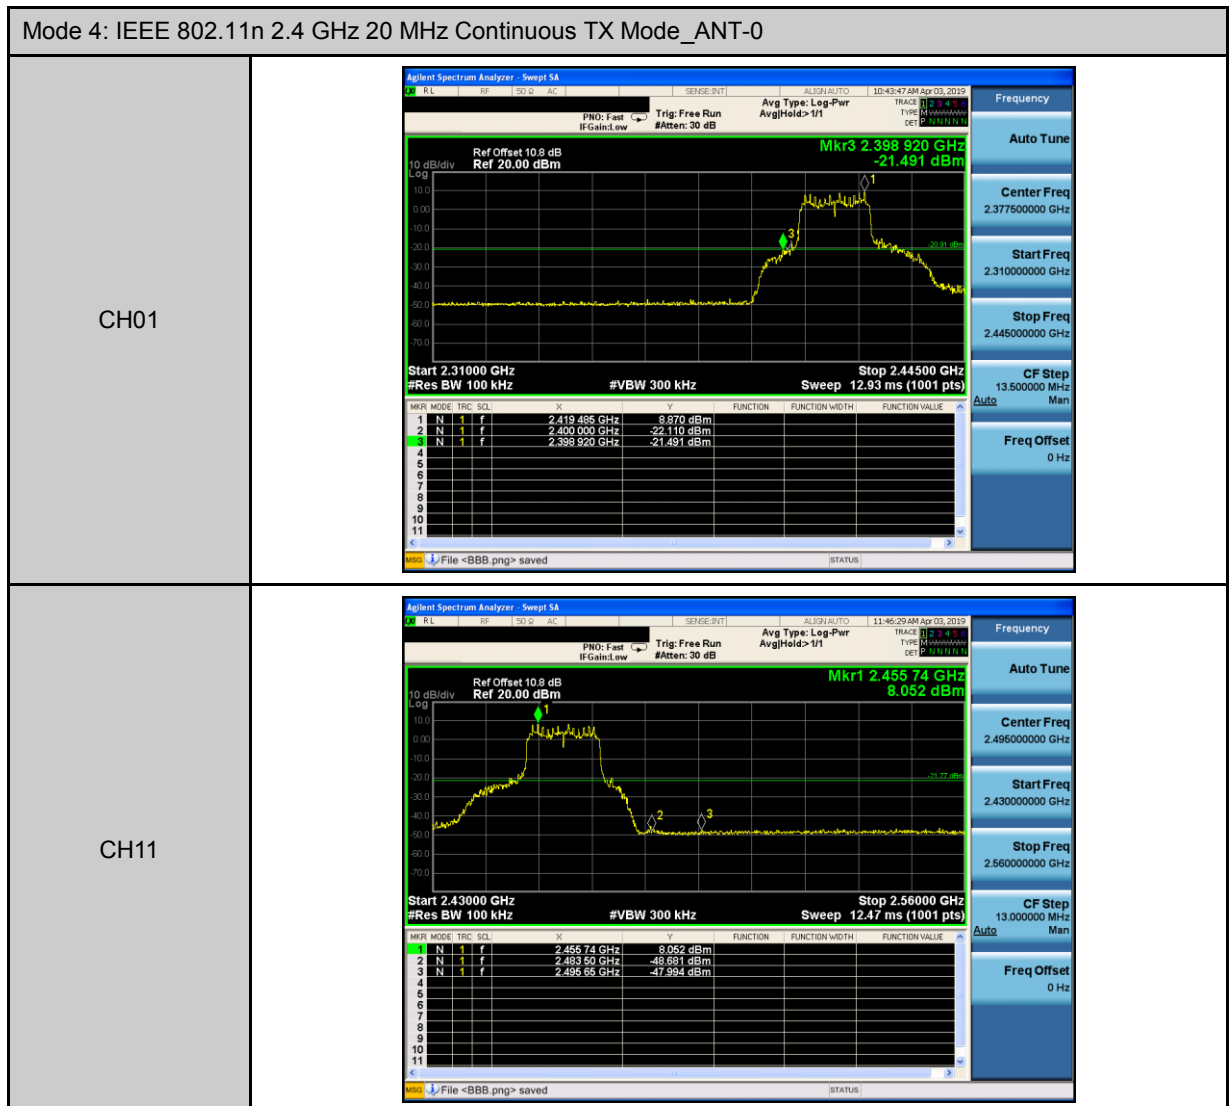


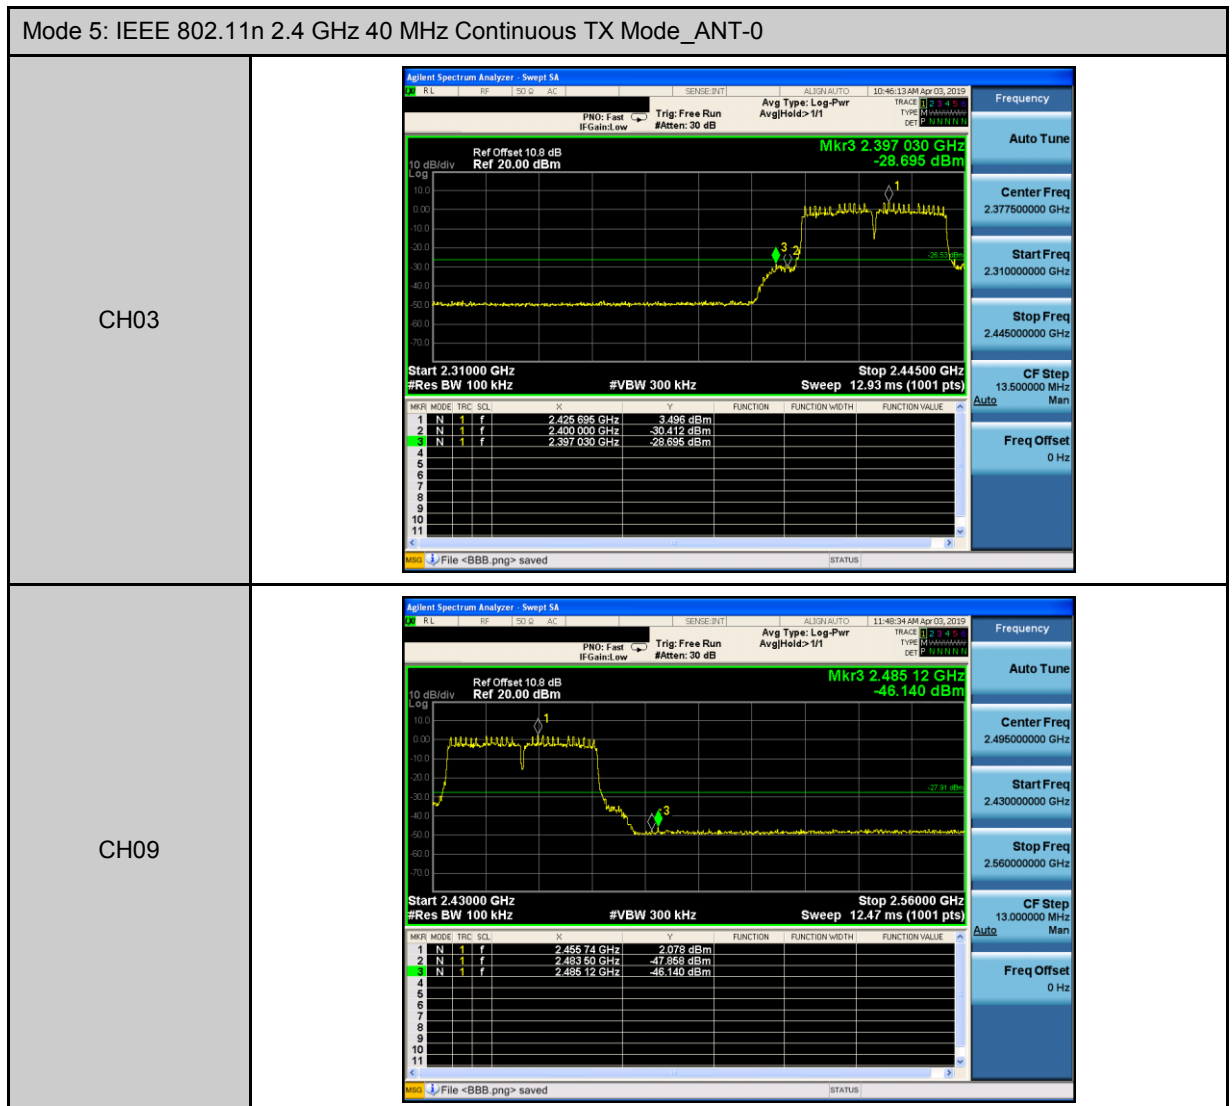

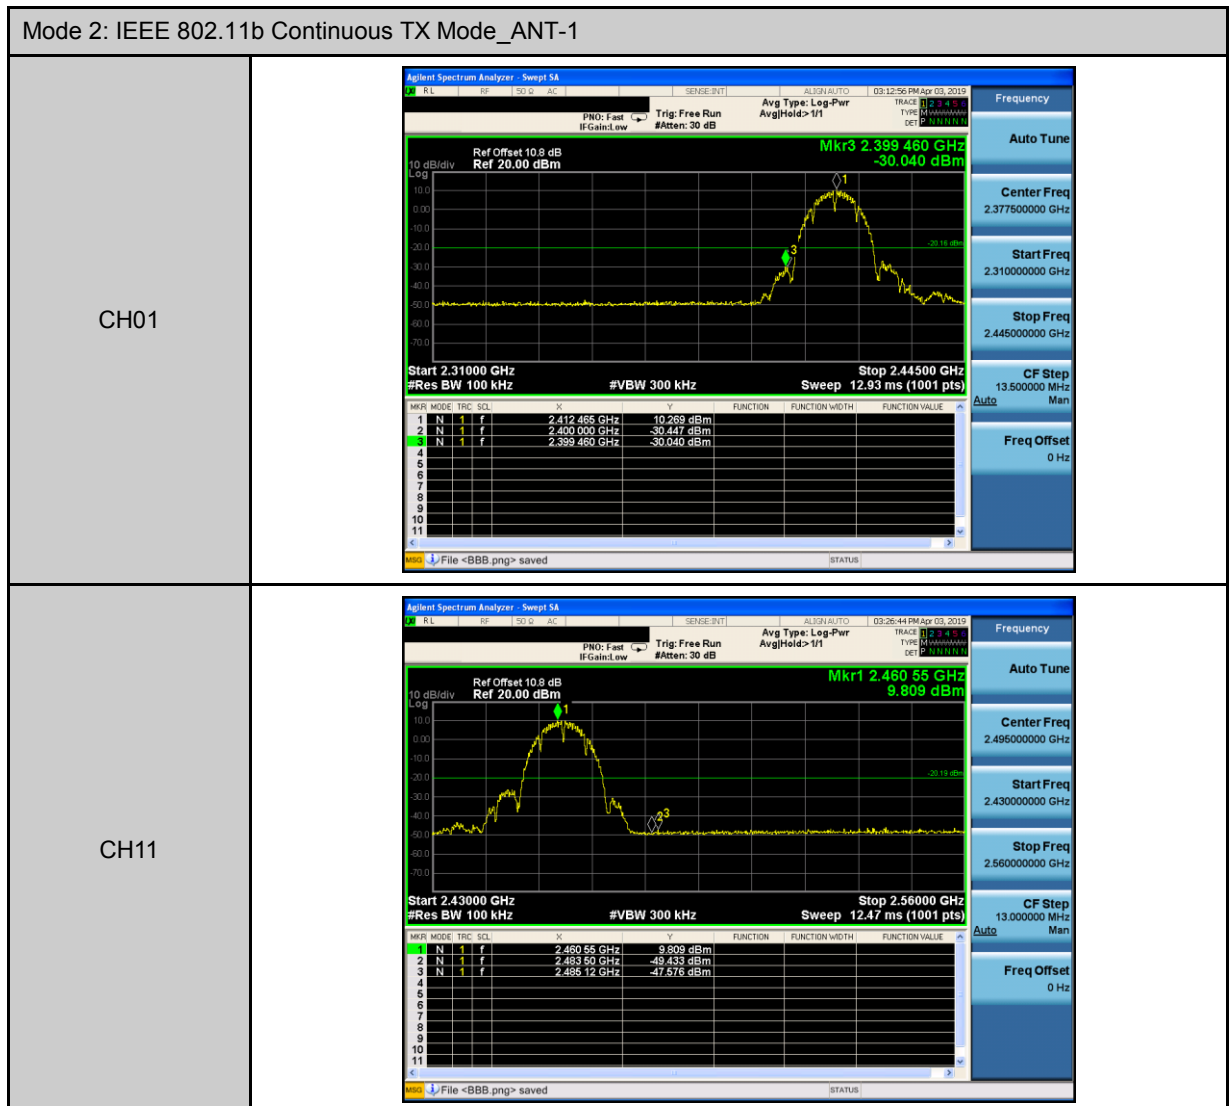

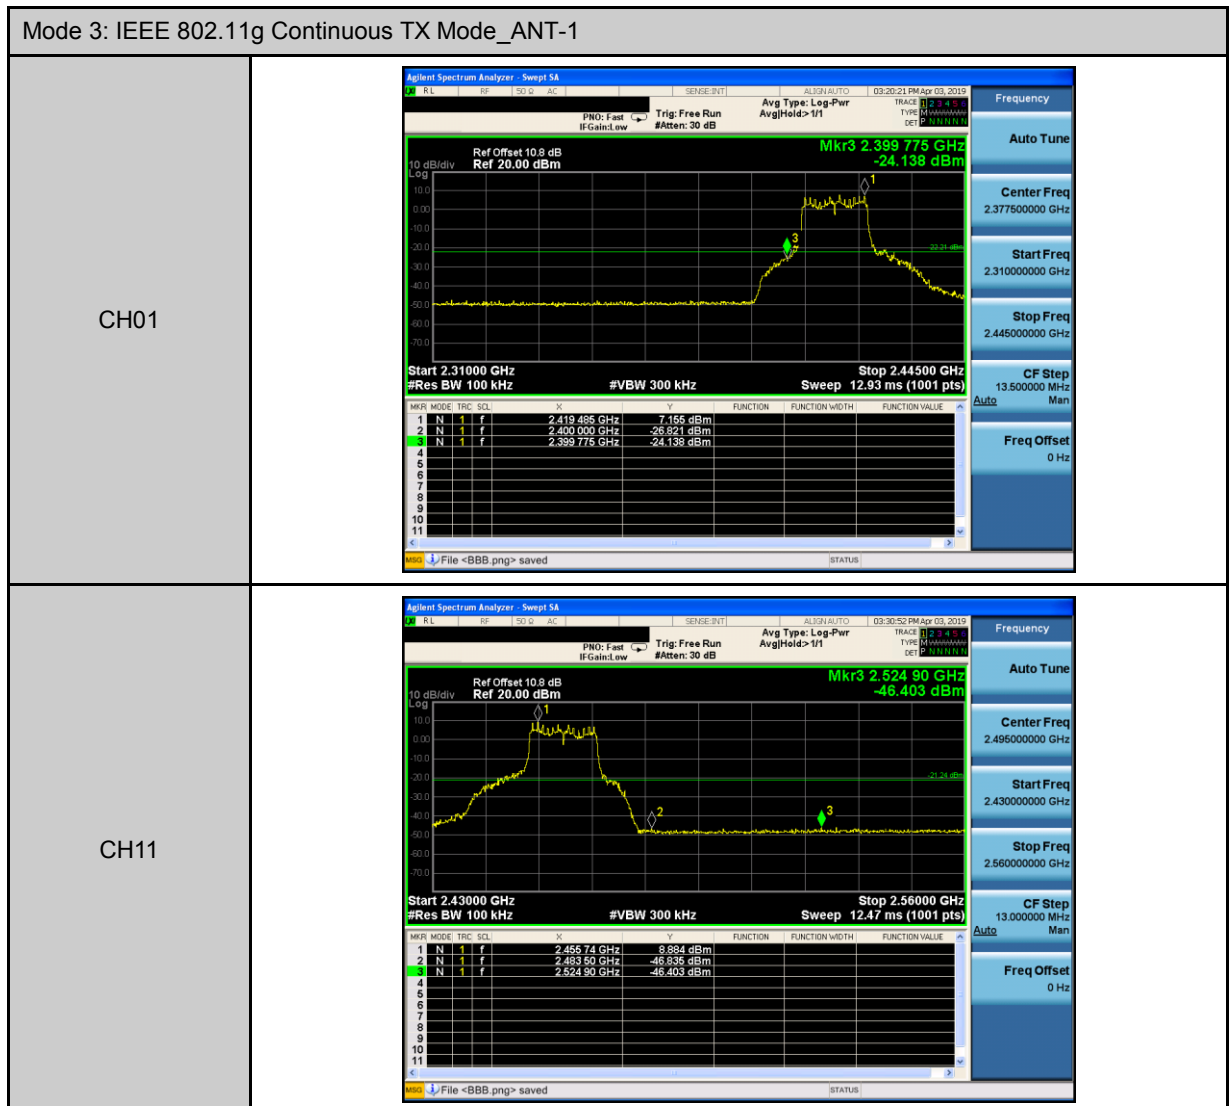

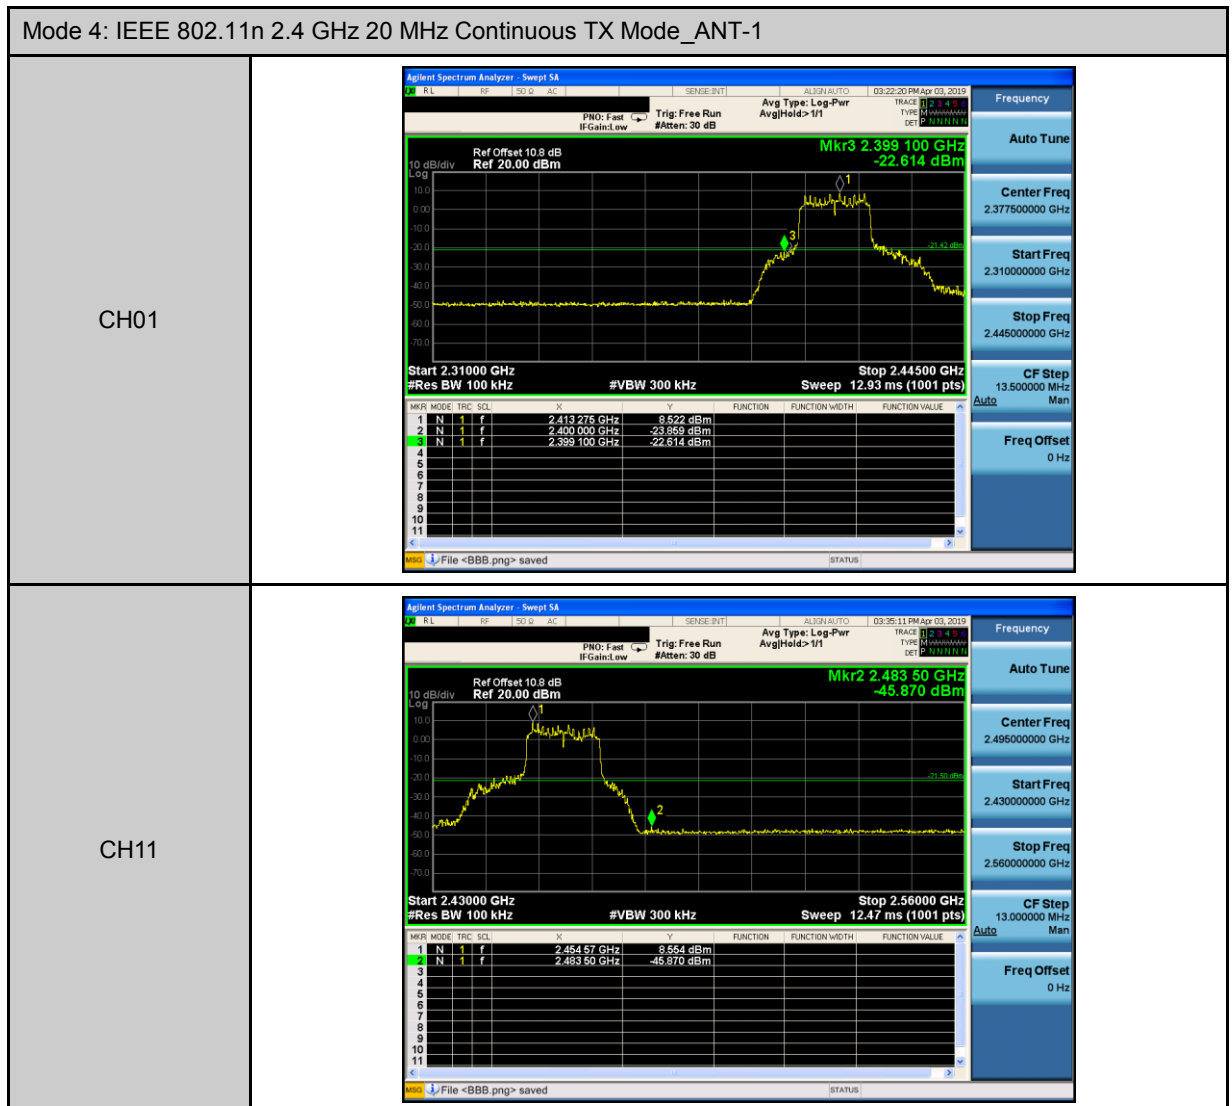

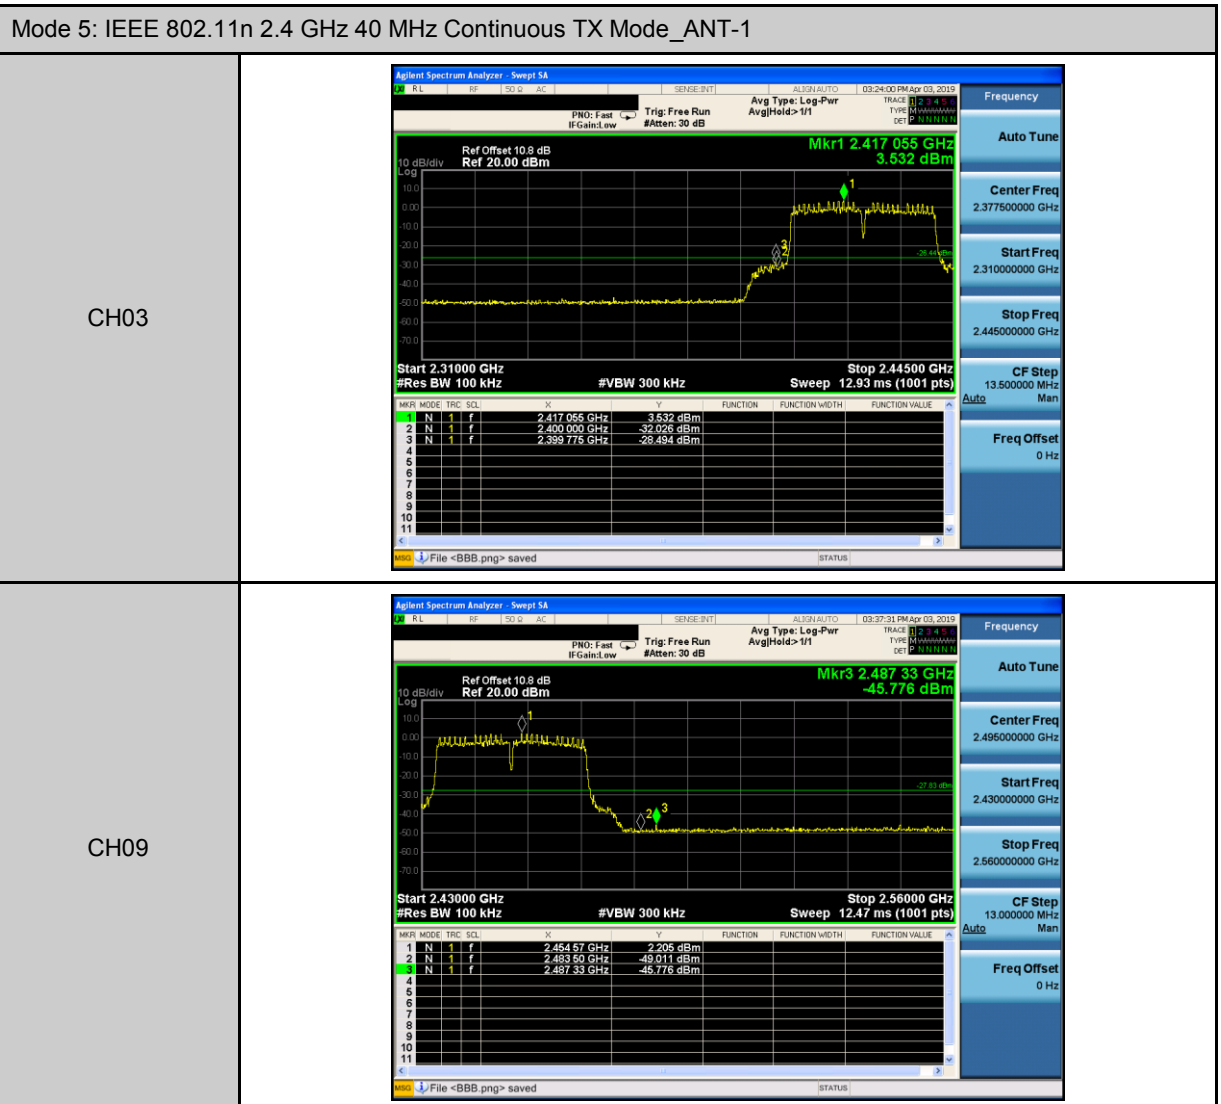


4.2.5 6 dB頻寬之要求

合格標準：

依據 NCC 低功率射頻電機技術規範 3.10.1.6(2)(A)節之要求，對使用數位調變技術(Digital Modulation Techniques)系統而言，6 dB 頻寬至少應有 500 千赫(kHz)。

測試架構圖：

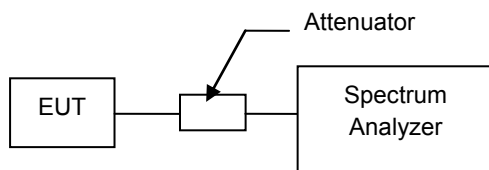

測試結果：

操作模式： Mode 2 / Mode 3 / Mode 4 / Mode 5				
操作模式	頻道	量測值 (kHz)		限制值 (kHz)
		ANT-0	ANT-1	
Mode 2	CH01	9591	9578	≥ 500
	CH06	10060	10070	≥ 500
	CH11	9547	9581	≥ 500
Mode 3	CH01	16080	15950	≥ 500
	CH06	16320	16340	≥ 500
	CH11	16340	15950	≥ 500
Mode 4	CH01	16100	16020	≥ 500
	CH06	16110	17130	≥ 500
	CH11	16090	15950	≥ 500
Mode 5	CH03	35220	35190	≥ 500
	CH06	35780	36340	≥ 500
	CH09	35790	35350	≥ 500
測試掃描圖請參考下頁。				



