

Test Report No.50205439 001

Appendix D: Radiated and Mains Spurious Emission Data


(File: 50205439 001AppendixD)

Contents


Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G.....	6
Spurious Emissions, TX Mode, 18-26G.....	12
Spurious Emissions, TX Mode, 30M-1G	18
Spurious Emissions, TX Mode, 9K-30M	20
Spurious Emissions, RX Mode, 1-18G	22
Spurious Emissions, RX Mode, 18-26G	24
Spurious Emissions, RX Mode, 30M-1G.....	26
Spurious Emissions, RX Mode, 9K-30M.....	28

Spurious Emissions, Band Edges, 2.35-2.5G

Low Channel (Horizontal)

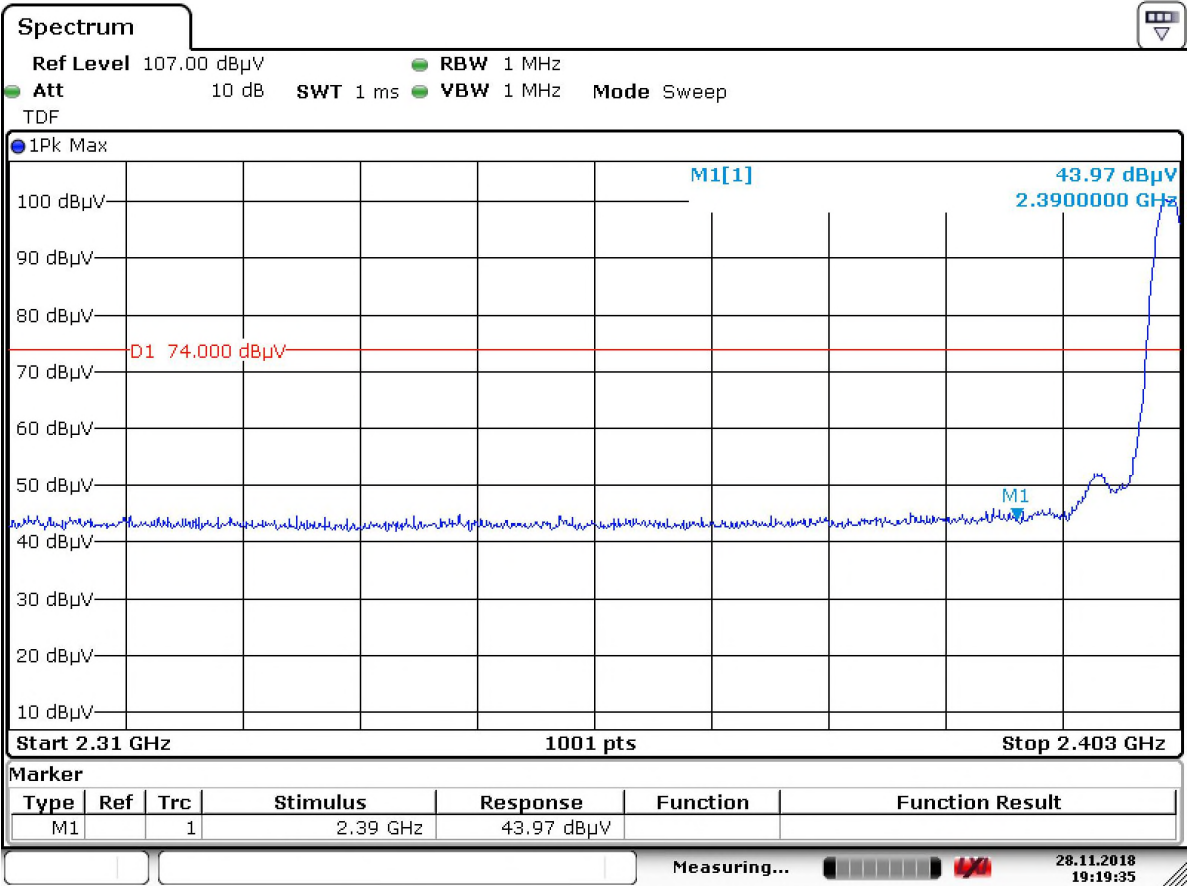


Date: 28.NOV.2018 19:19:35

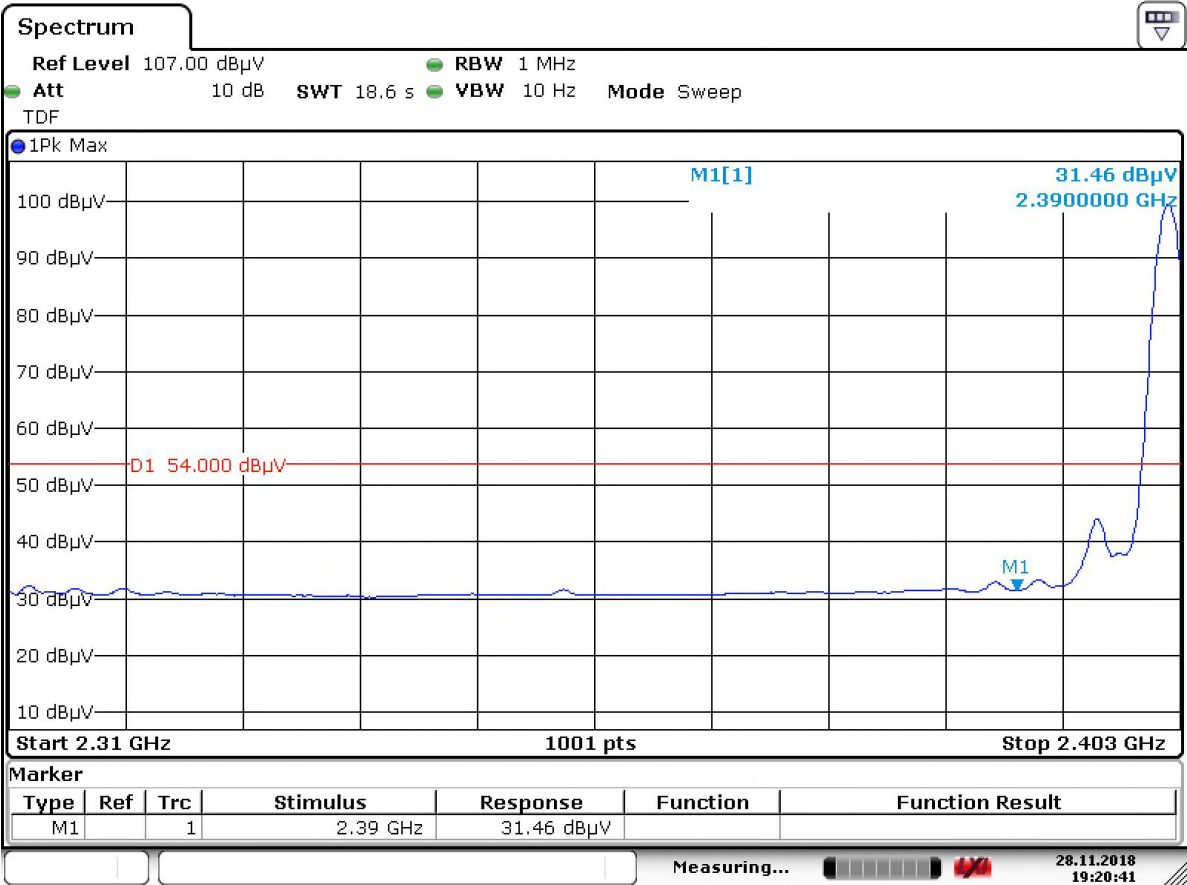


Date: 28.NOV.2018 19:20:41

Low Channel (Vertical)

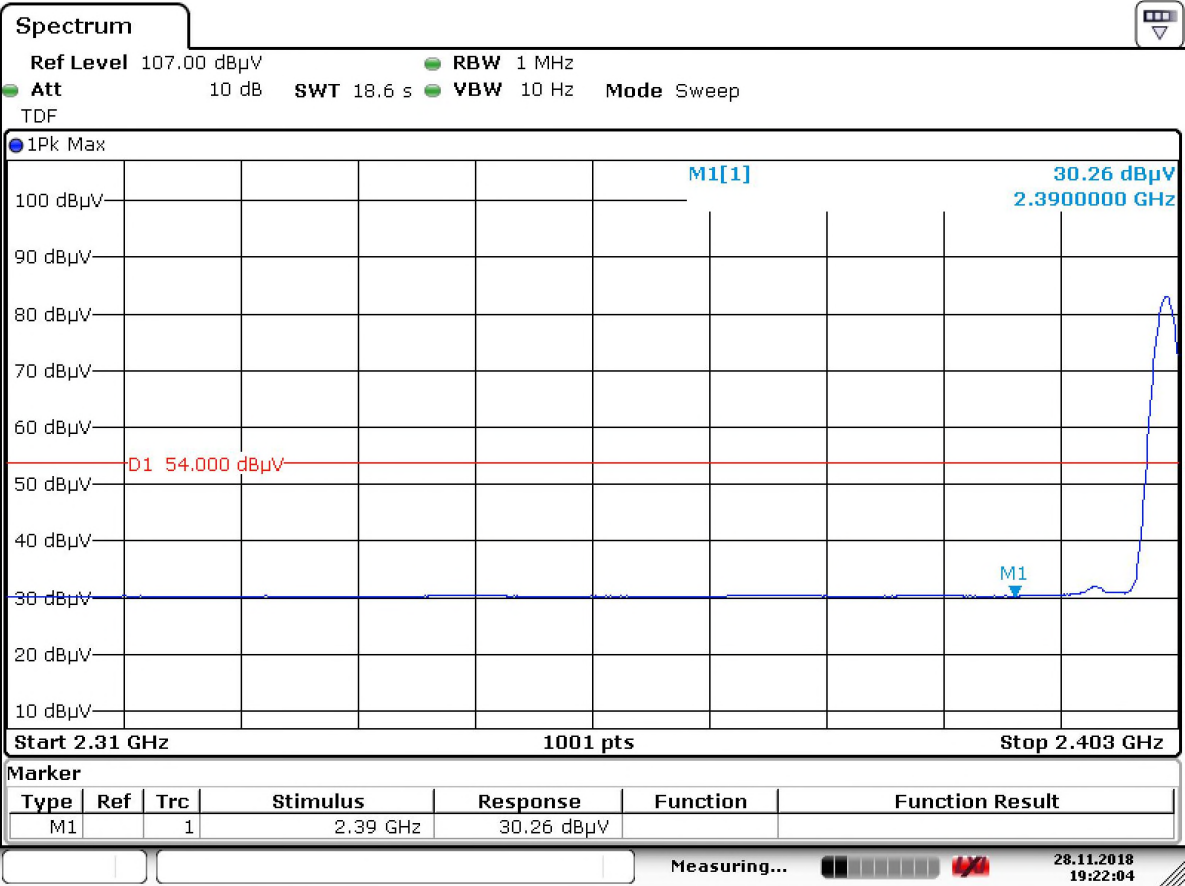


Date: 28.NOV.2018 19:22:04

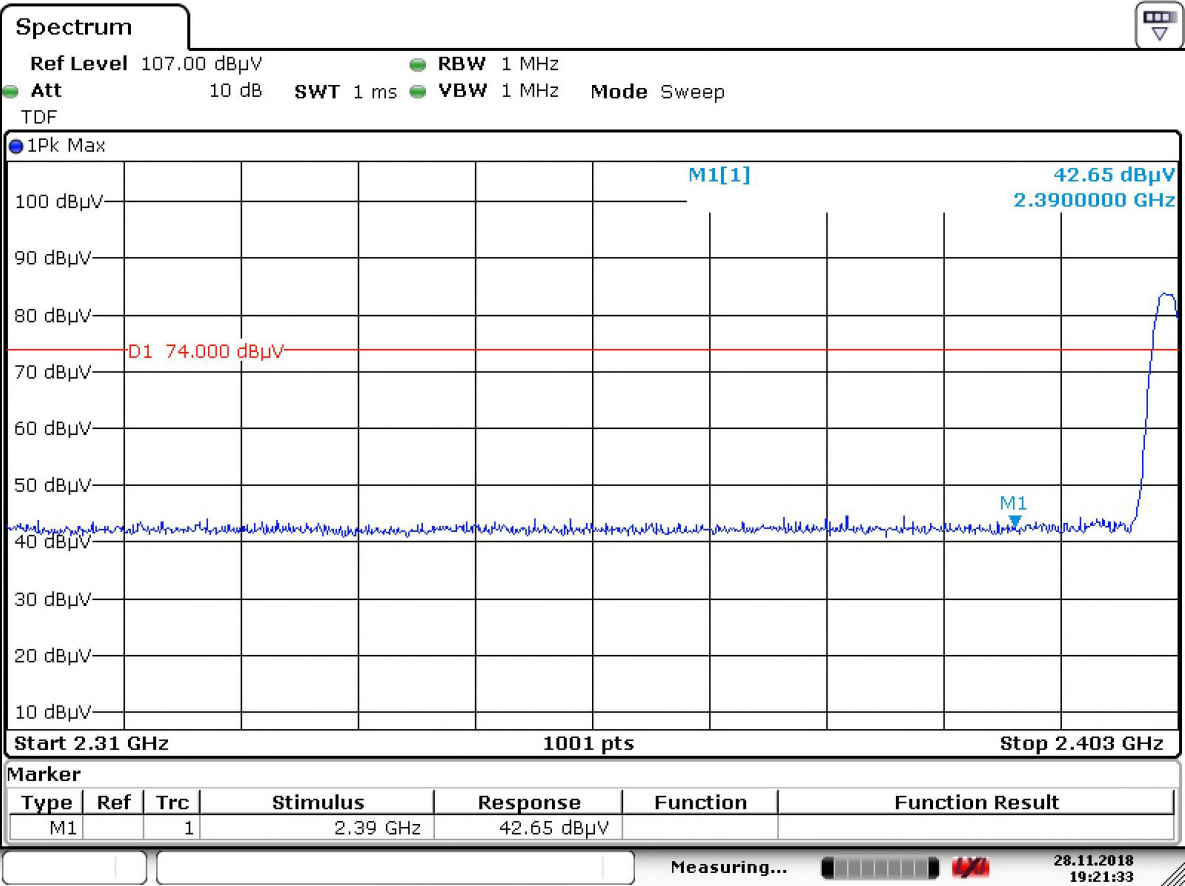


Date: 28.NOV.2018 19:21:33

High Channel (Horizontal)

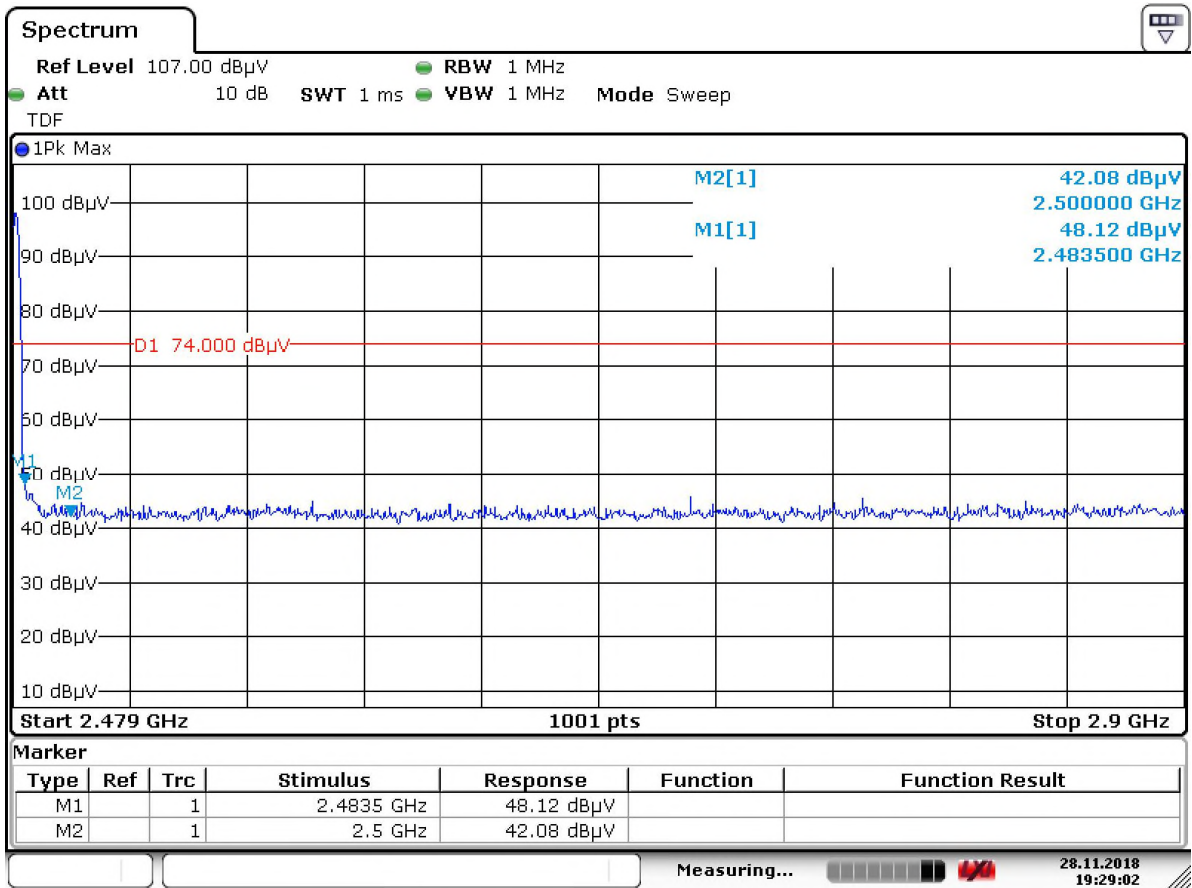


Date: 28.NOV.2018 19:29:03

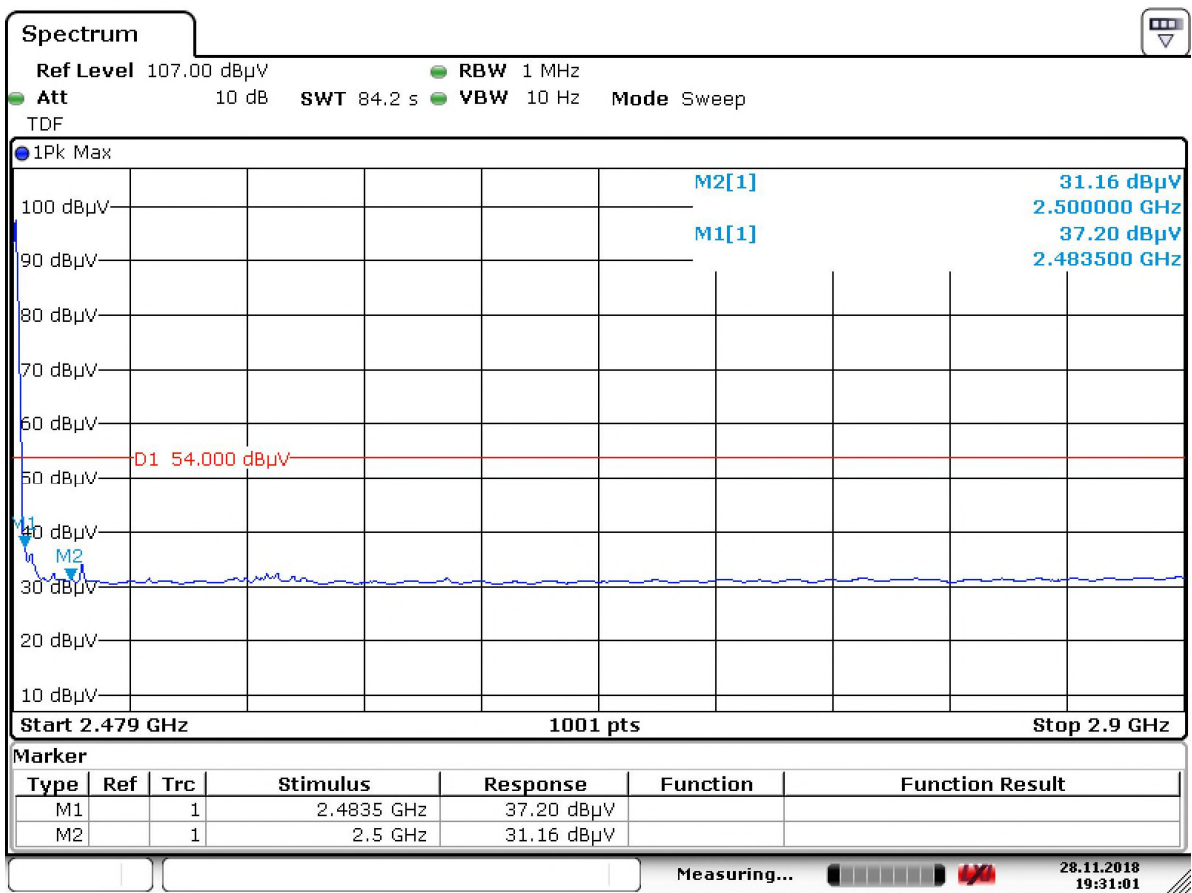


Date: 28.NOV.2018 19:31:02

High Channel (Vertical)

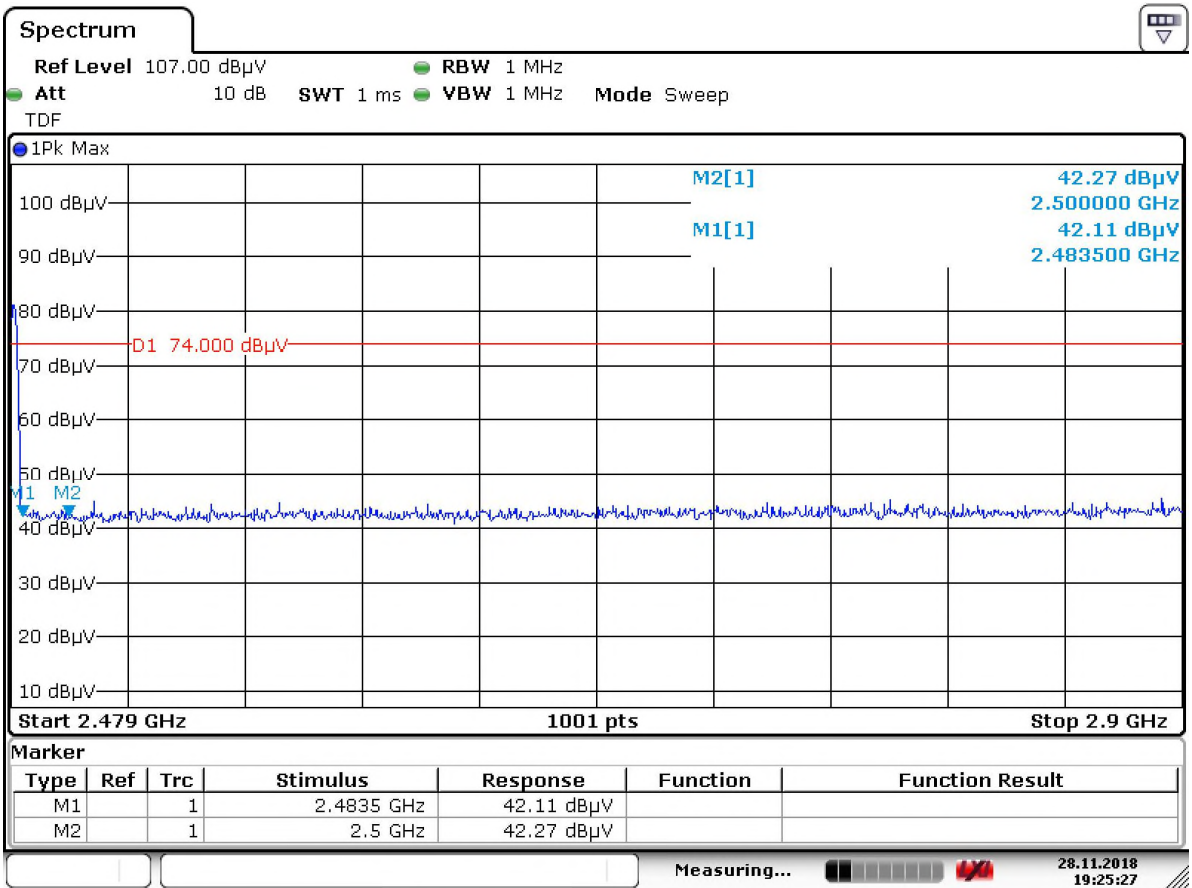

Date: 28.NOV.2018 19:25:27

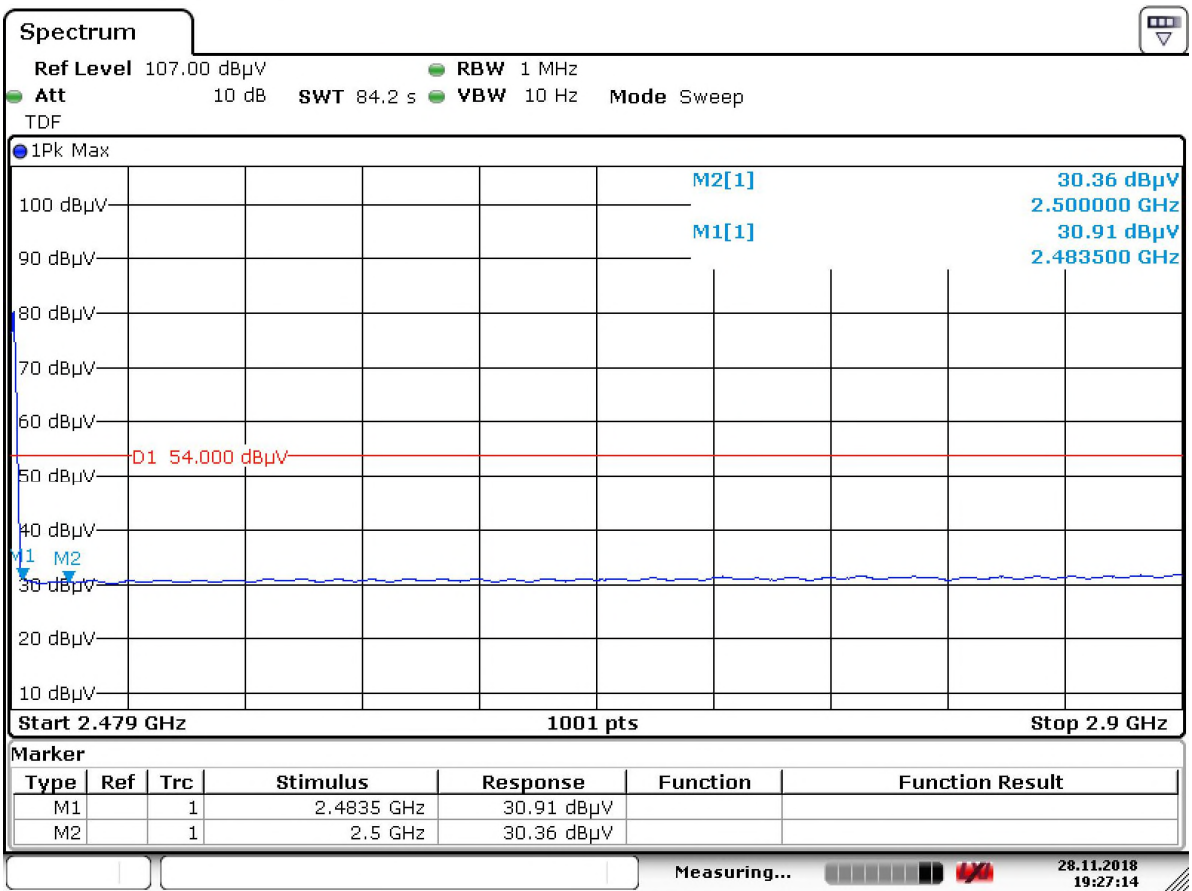

Date: 28.NOV.2018 19:27:14


Spurious Emissions, TX Mode, 1-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

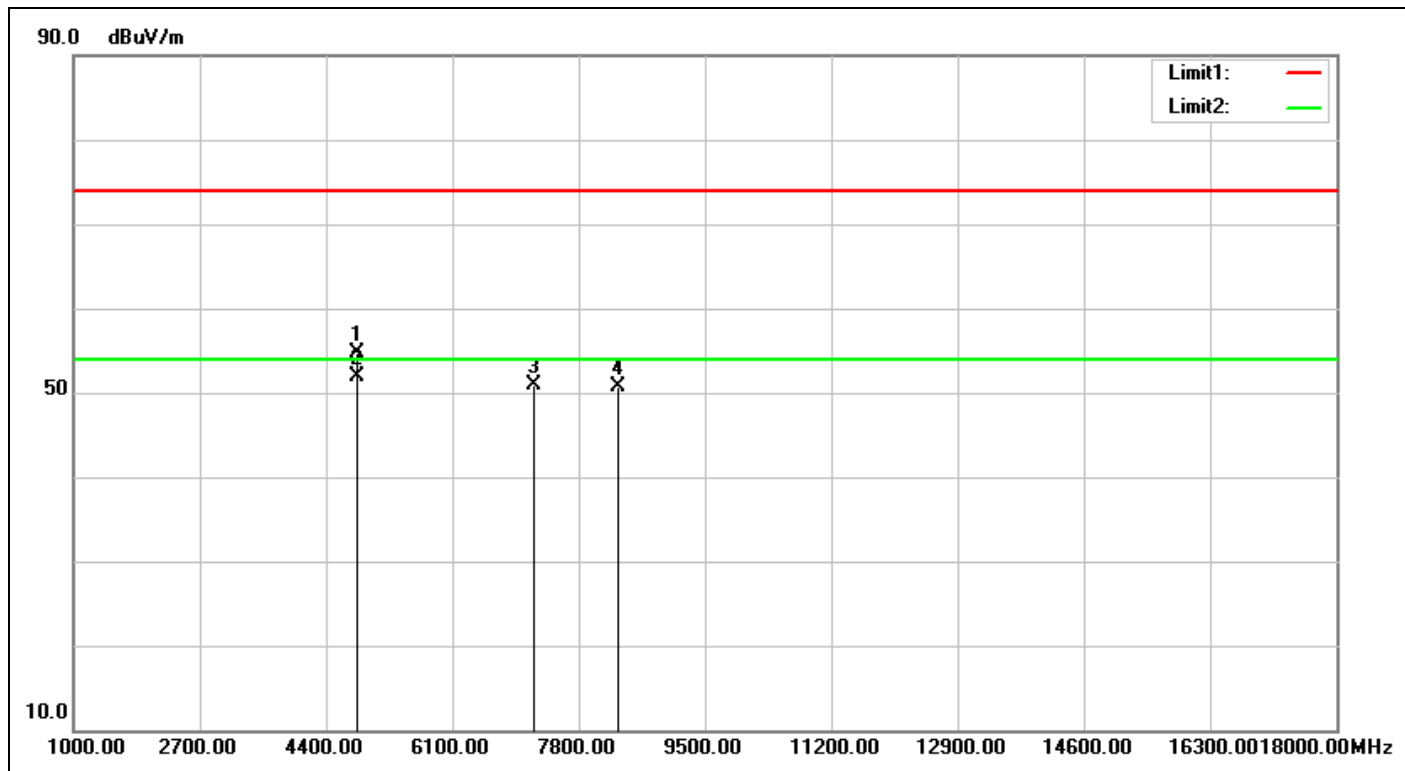


Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:22:44
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	3.30	51.37	54.67	74.00	-19.33	peak	100	184	
2	4804.000	3.30	48.67	51.97	54.00	-2.03	AVG	100	184	
3	7206.000	4.77	46.13	50.90	74.00	-23.10	peak	100	0	
4	8327.000	4.87	45.75	50.62	74.00	-23.38	peak	100	280	

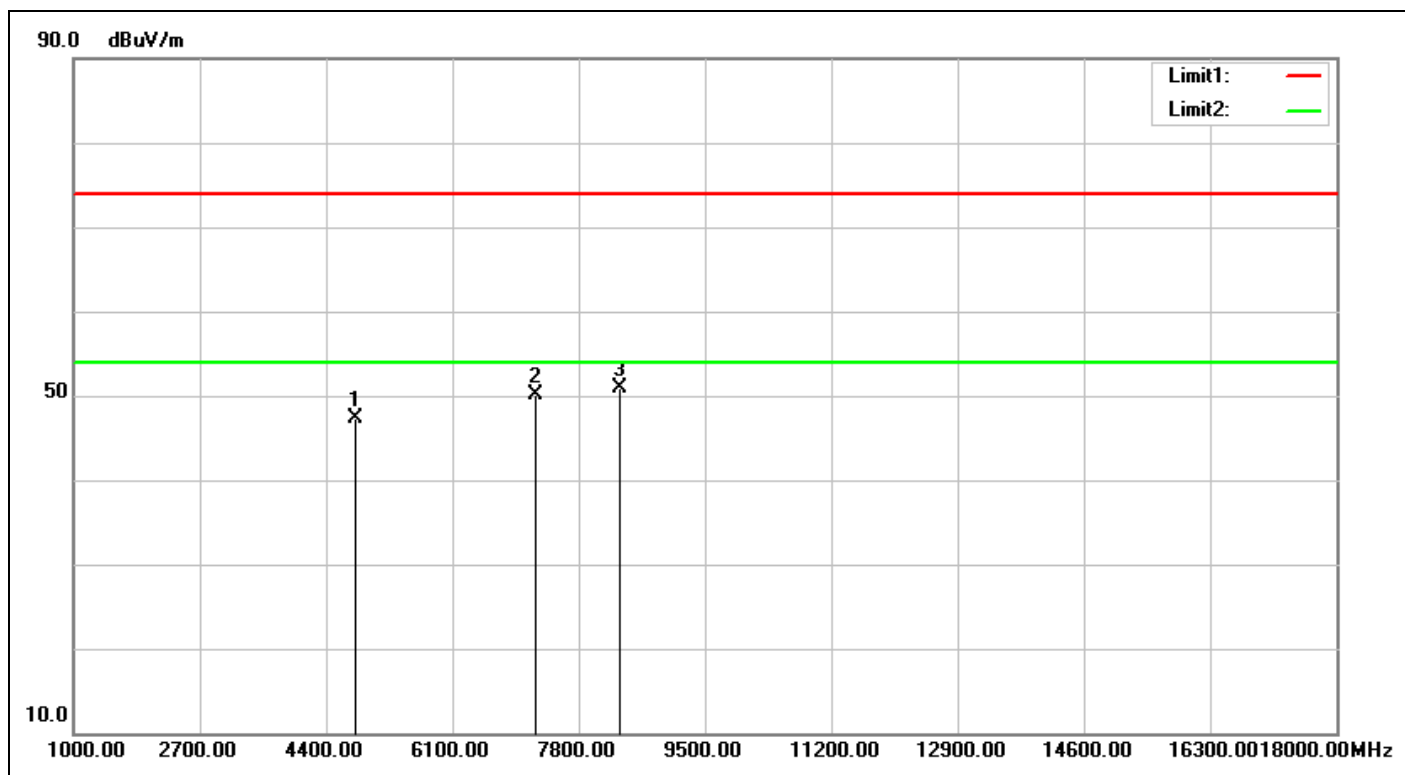


Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 19:23:37
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	3.30	44.01	47.31	74.00	-26.69	peak	100	0	
2	7206.000	4.77	45.31	50.08	74.00	-23.92	peak	100	360	
3	8361.000	4.89	45.94	50.83	74.00	-23.17	peak	100	292	

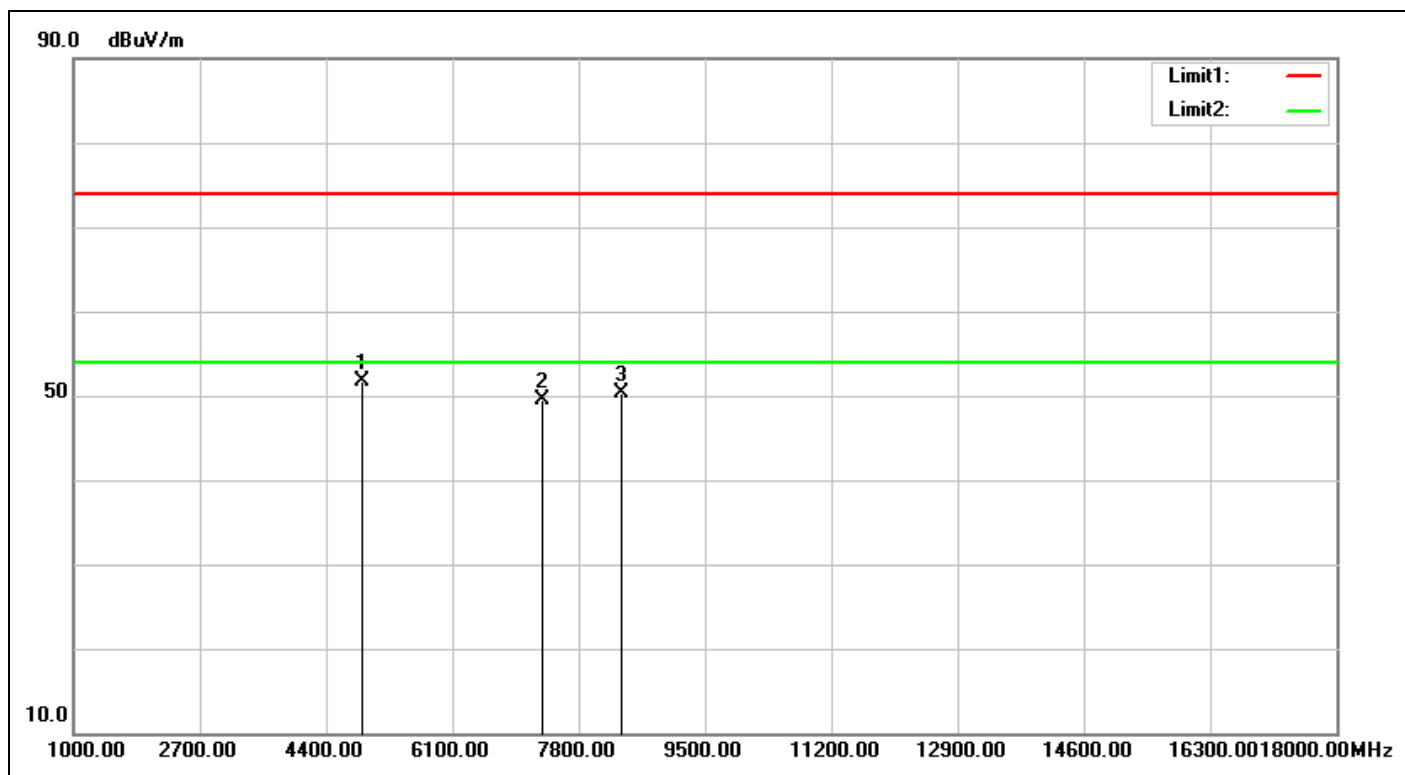


Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:26:55
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%)	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4880.000	3.60	48.14	51.74	74.00	-22.26	peak	100	307	
2	7320.000	4.66	44.94	49.60	74.00	-24.40	peak	100	0	
3	8378.000	4.91	45.32	50.23	74.00	-23.77	peak	100	85	

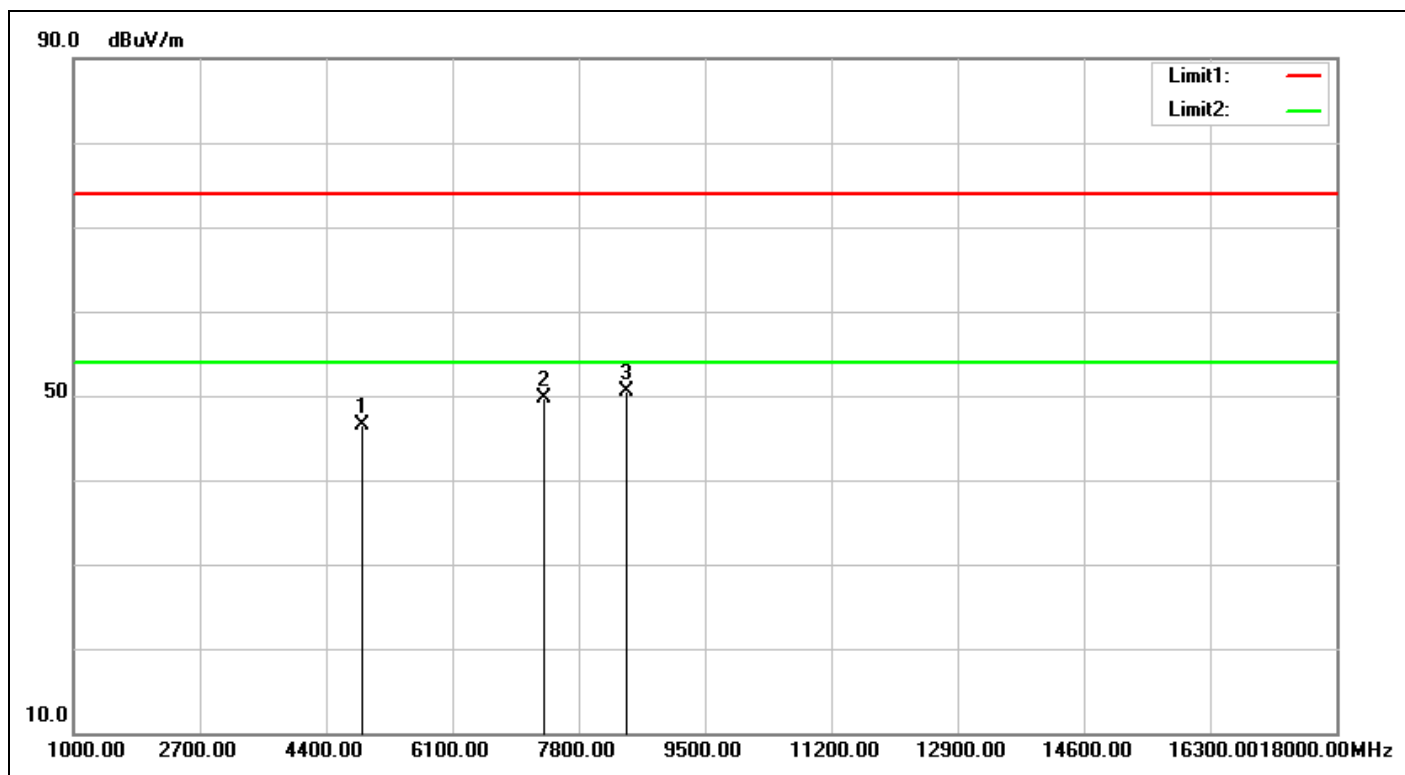


Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 19:27:47
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%)	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4880.000	3.60	42.99	46.59	74.00	-27.41	peak	100	0	
2	7320.000	4.66	45.02	49.68	74.00	-24.32	peak	100	0	
3	8446.000	4.95	45.56	50.51	74.00	-23.49	peak	100	43	

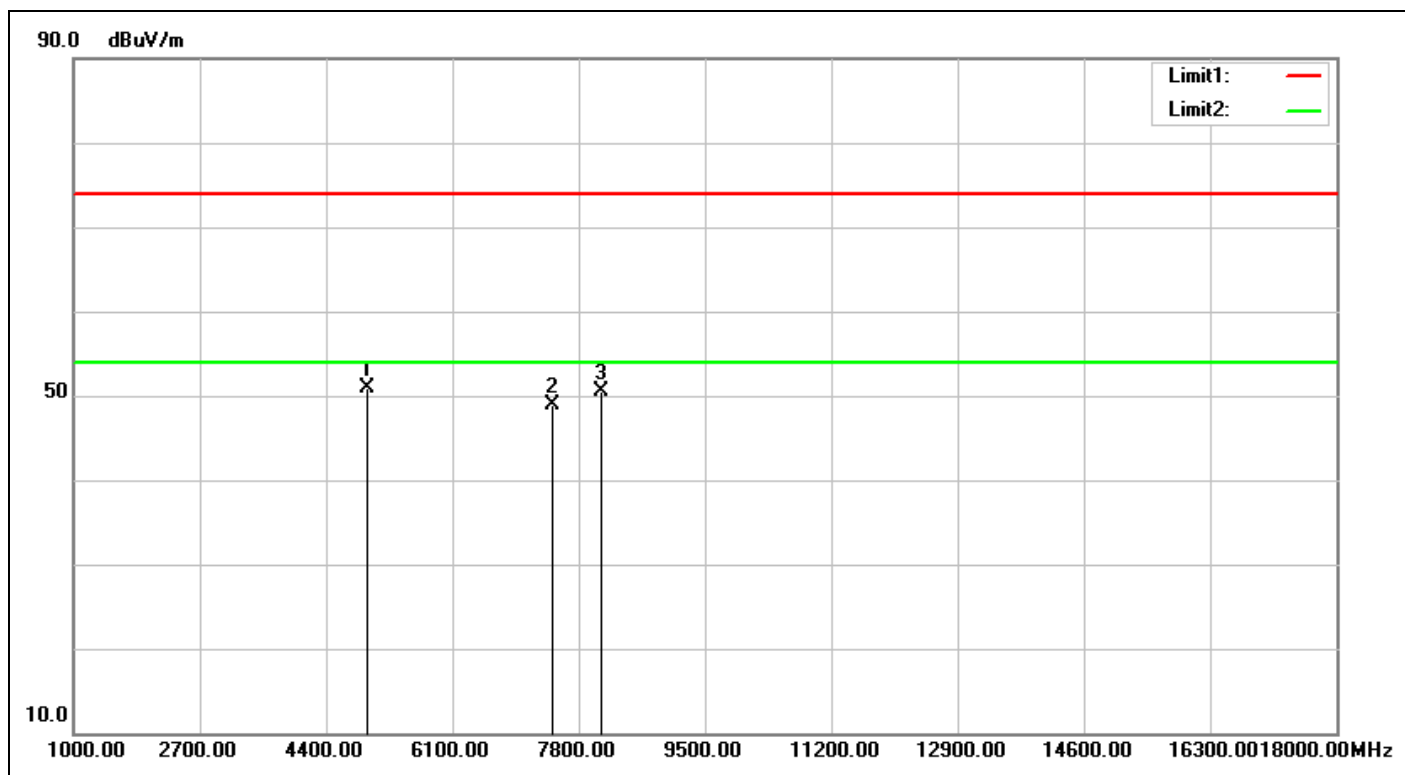

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:29:54
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%)	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	3.93	47.01	50.94	74.00	-23.06	peak	100	174	
2	7440.000	4.54	44.42	48.96	74.00	-25.04	peak	100	0	
3	8106.000	4.72	45.76	50.48	74.00	-23.52	peak	100	215	

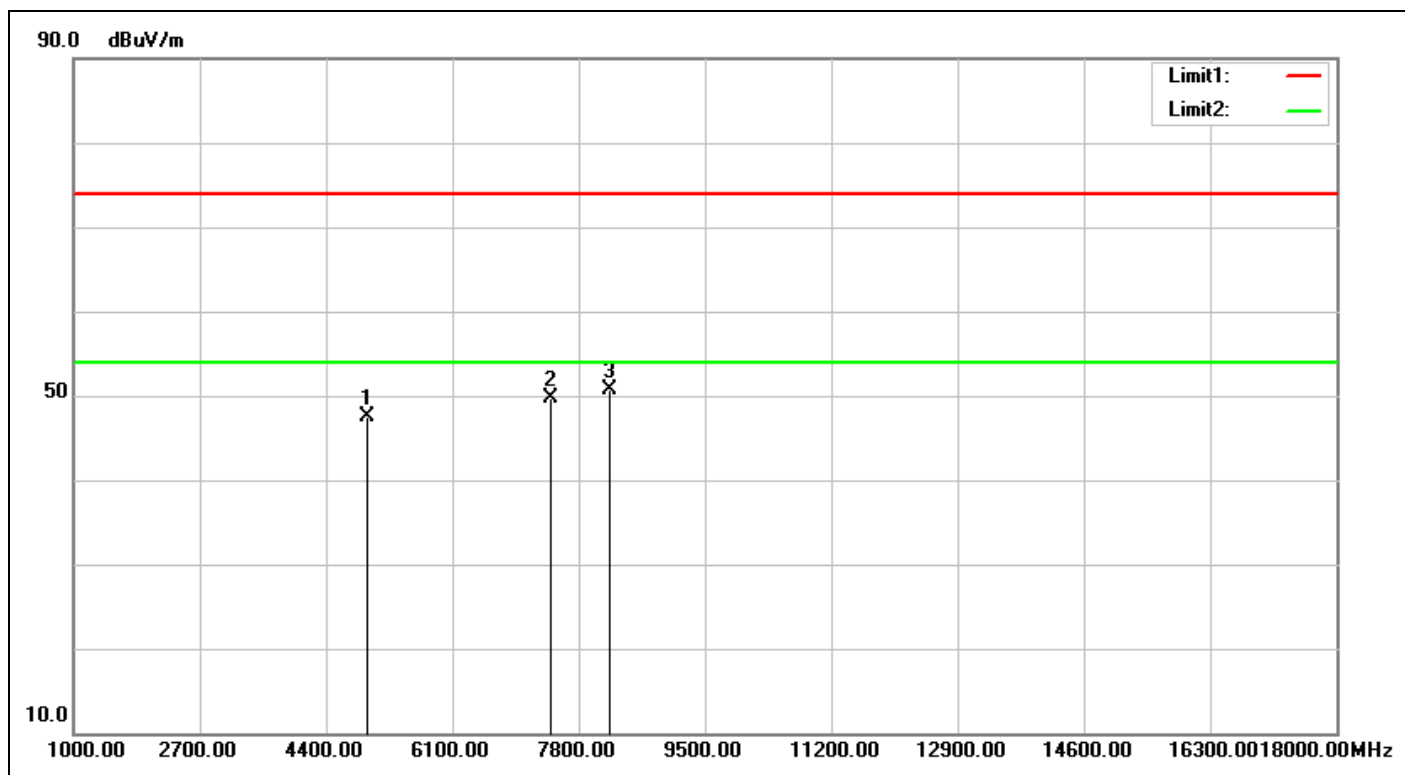

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 19:30:46
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	3.93	43.59	47.52	74.00	-26.48	peak	100	0	
2	7440.000	4.54	45.15	49.69	74.00	-24.31	peak	100	0	
3	8225.000	4.80	45.86	50.66	74.00	-23.34	peak	100	254	


Spurious Emissions, TX Mode, 18-26G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

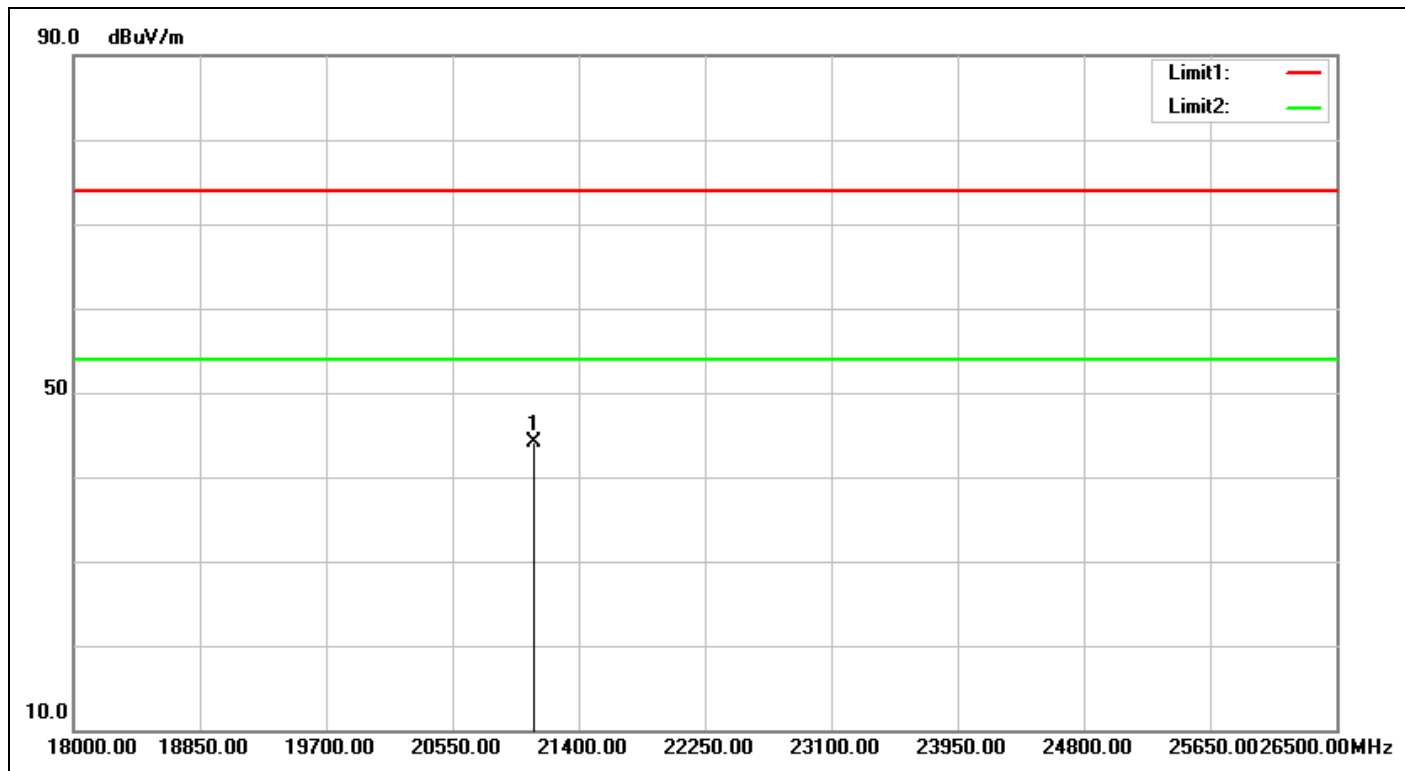


Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:47:28
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21094.000	4.71	39.47	44.18	74.00	-29.82	peak	100	0	

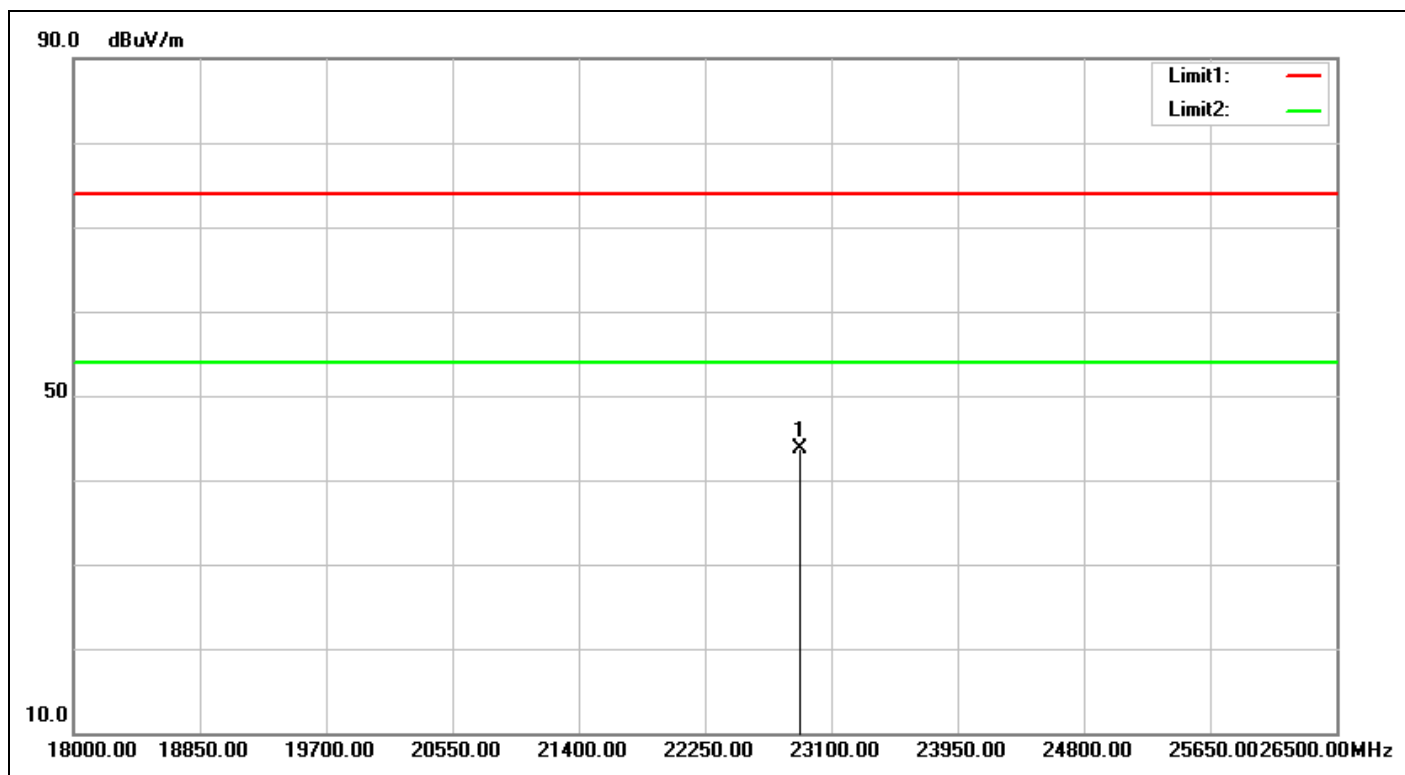


Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 19:47:34
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22887.500	5.16	38.45	43.61	74.00	-30.39	peak	100	15	

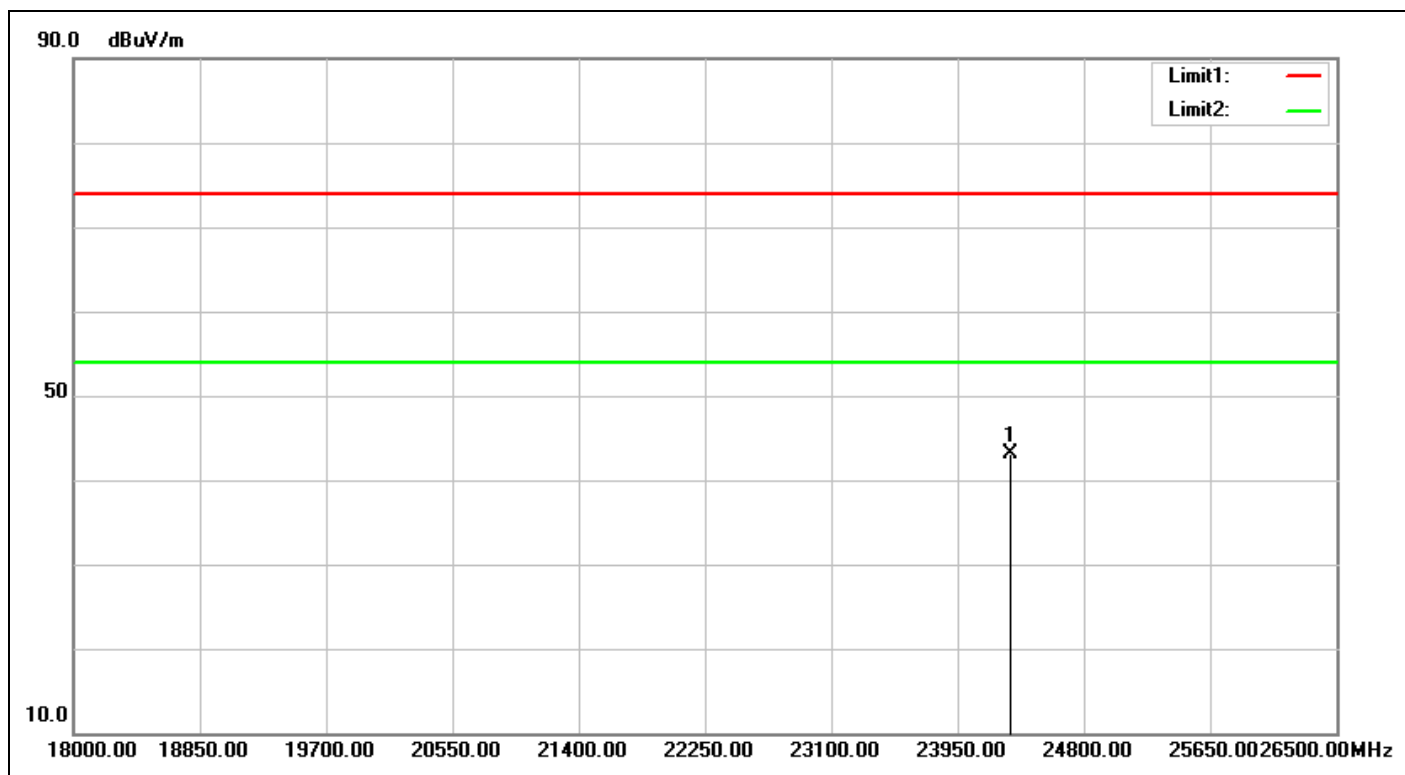


Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:48:05
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	24307.000	5.32	37.71	43.03	74.00	-30.97	peak	100	360	

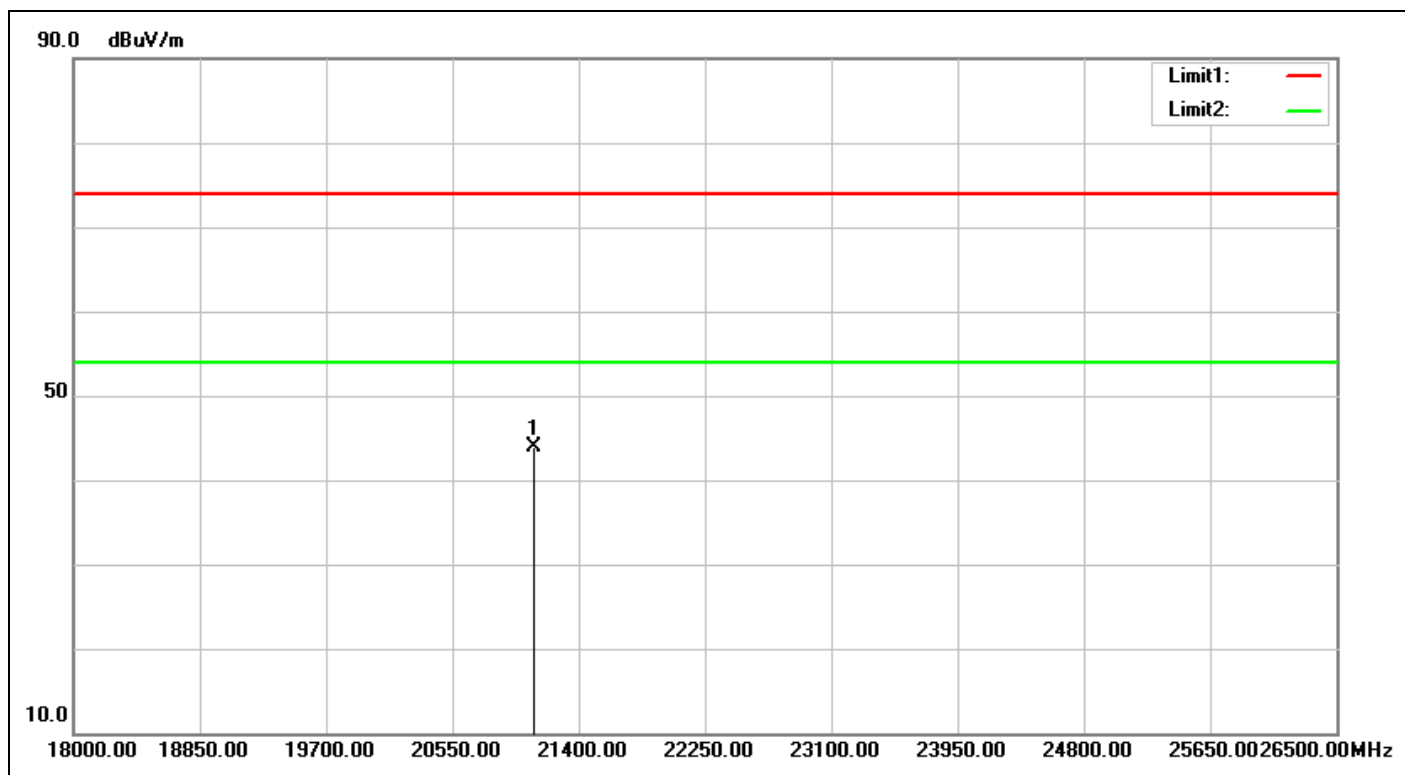


Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 19:48:11
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21102.500	4.70	39.29	43.99	74.00	-30.01	peak	100	0	

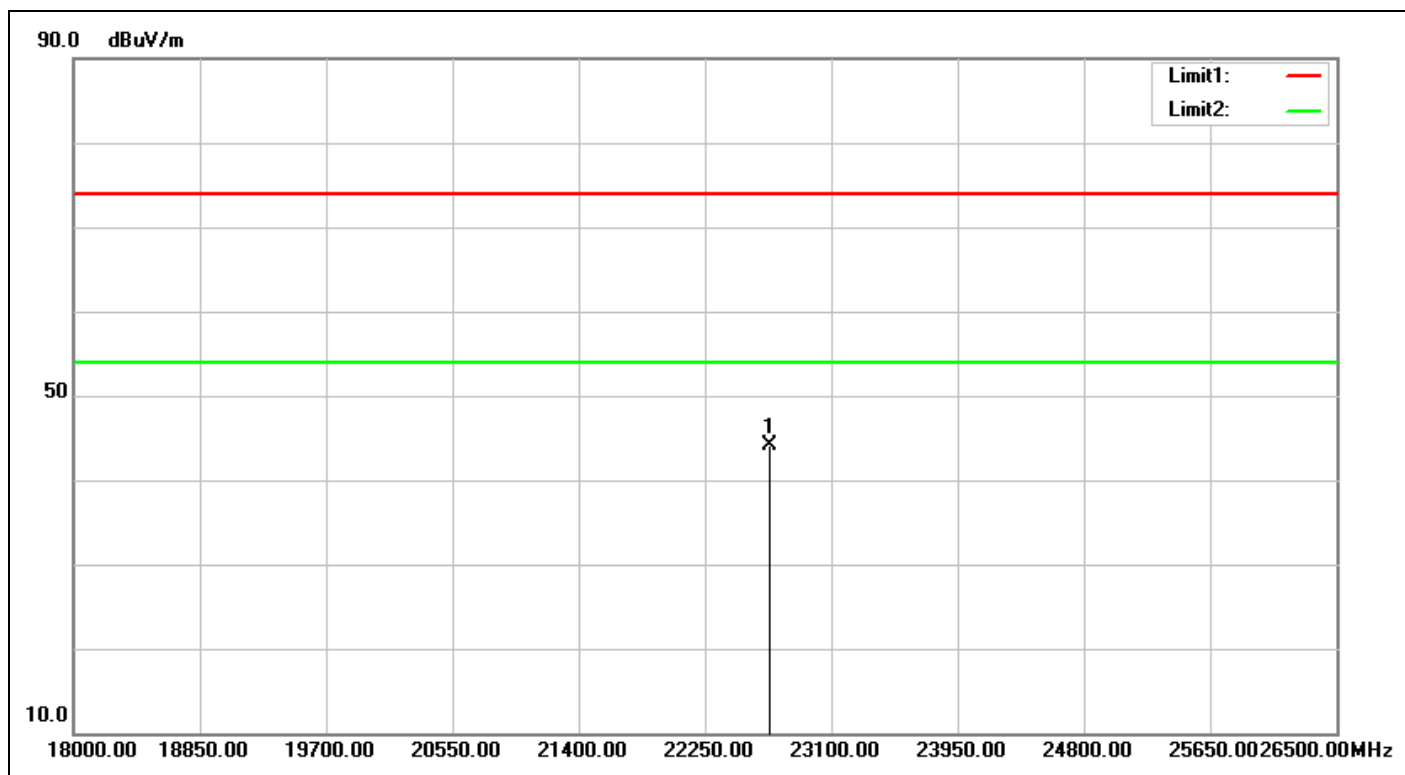

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:48:41
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22683.500	4.89	39.18	44.07	74.00	-29.93	peak	100	360	

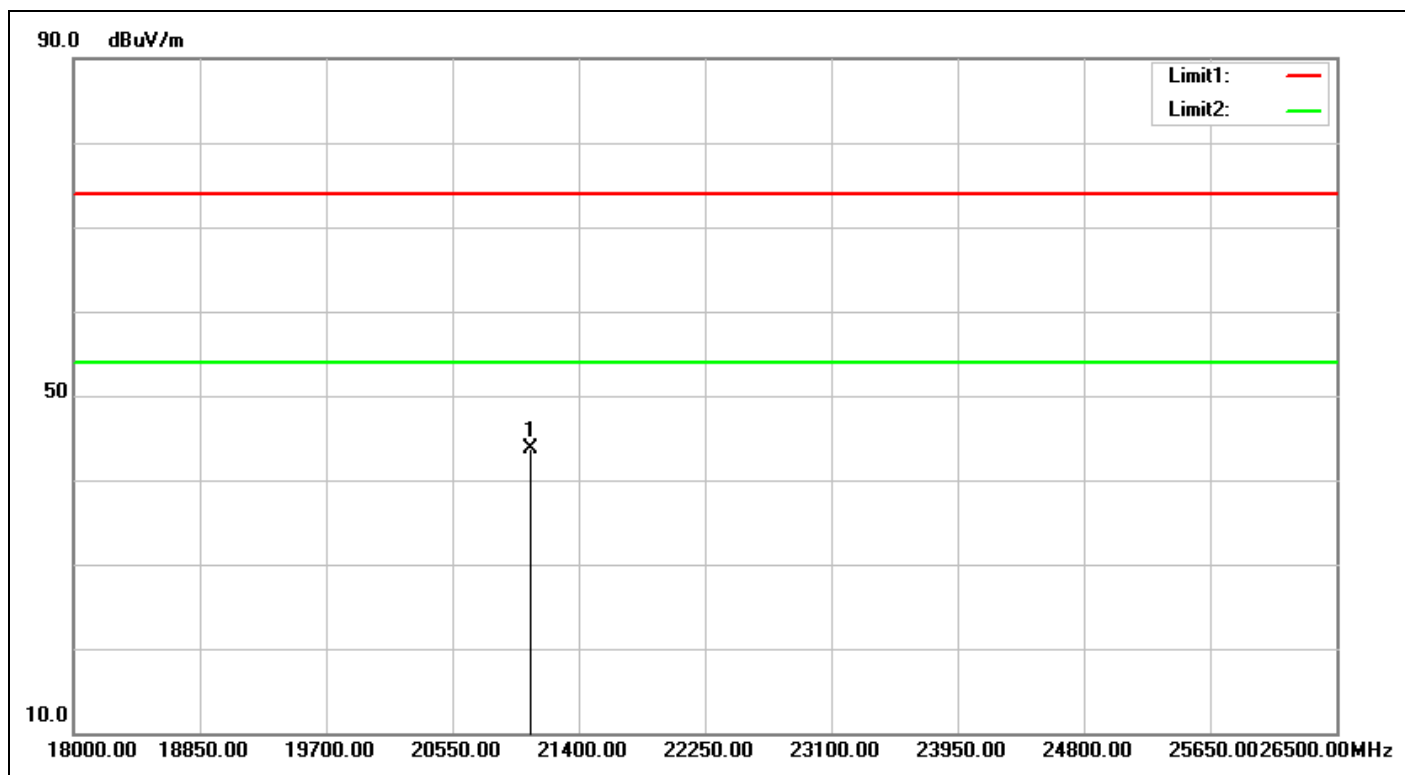

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 19:48:48
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21077.000	4.72	38.99	43.71	74.00	-30.29	peak	100	0	


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

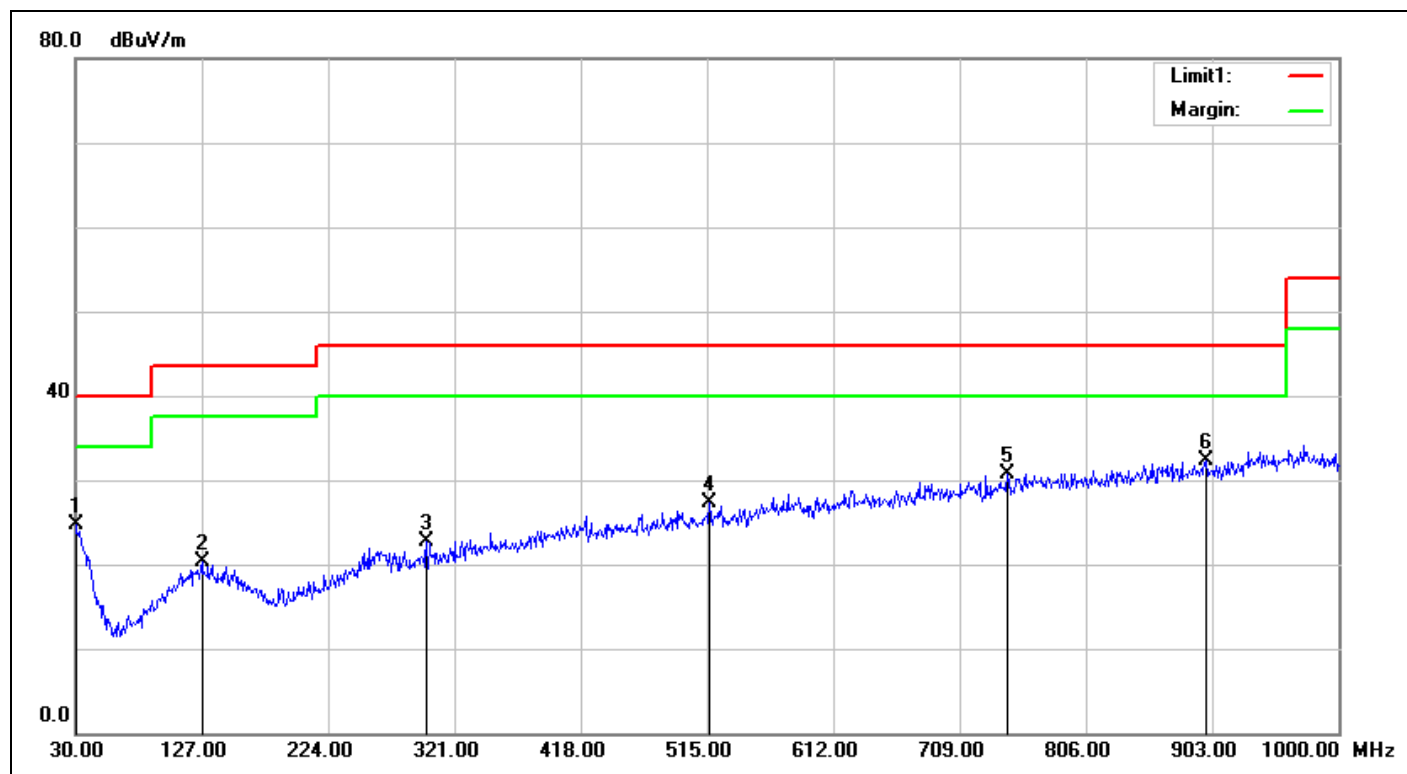

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:59:53
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%)	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	24.73	24.70	40.00	-15.30	QP	100	217	
2	127.0000	-7.10	27.48	20.38	43.50	-23.12	QP	100	161	
3	299.6600	-4.56	27.35	22.79	46.00	-23.21	QP	100	82	
4	516.9400	-0.93	28.16	27.23	46.00	-18.77	QP	100	207	
5	745.8600	2.38	28.30	30.68	46.00	-15.32	QP	100	230	
6	898.1500	4.37	27.87	32.24	46.00	-13.76	QP	100	124	

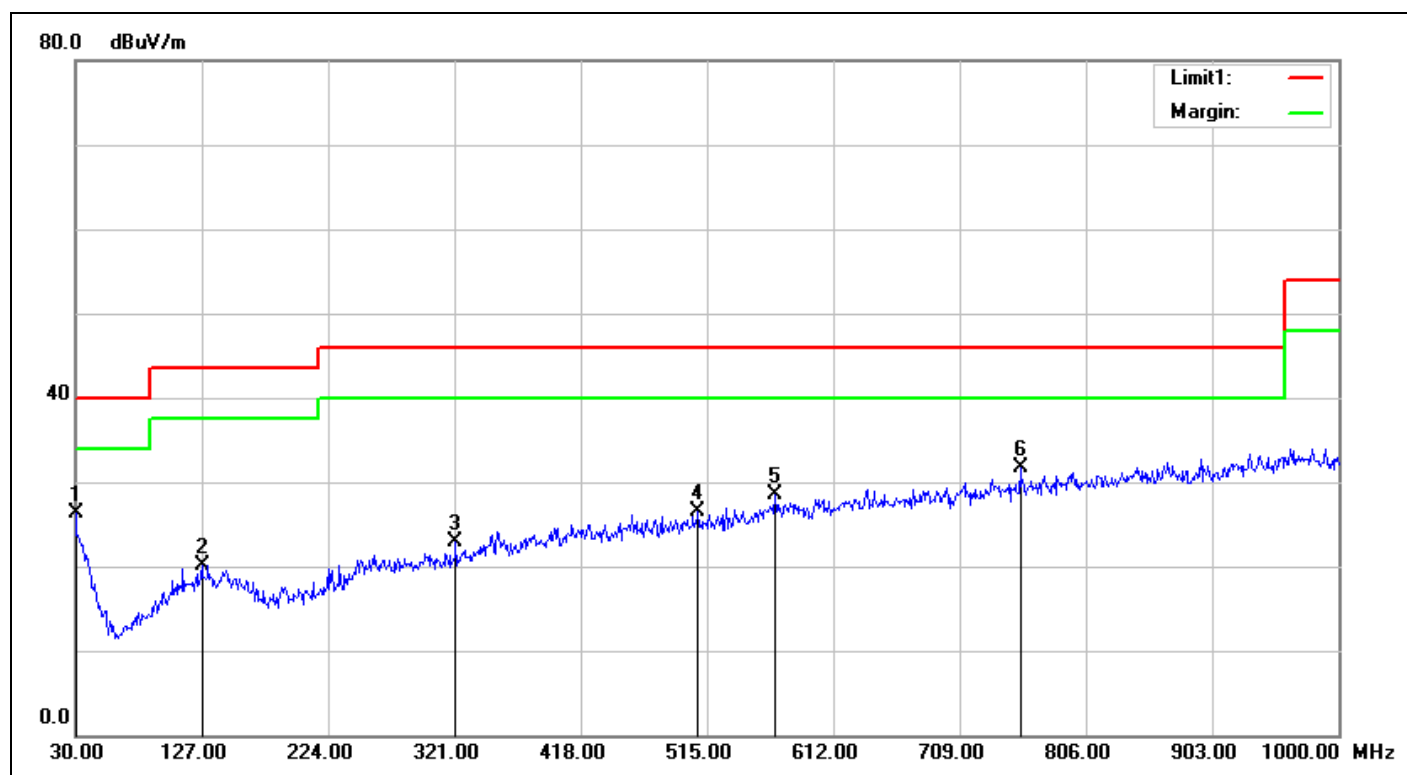

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 20:00:46
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%)	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	26.41	26.38	40.00	-13.62	QP	100	298	
2	127.0000	-7.10	27.30	20.20	43.50	-23.30	QP	100	160	
3	321.9700	-4.29	27.10	22.81	46.00	-23.19	QP	100	350	
4	508.2100	-1.02	27.60	26.58	46.00	-19.42	QP	100	239	
5	567.3800	0.08	28.34	28.42	46.00	-17.58	QP	100	360	
6	755.5600	2.51	29.28	31.79	46.00	-14.21	QP	100	232	


Spurious Emissions, TX Mode, 9K-30M



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

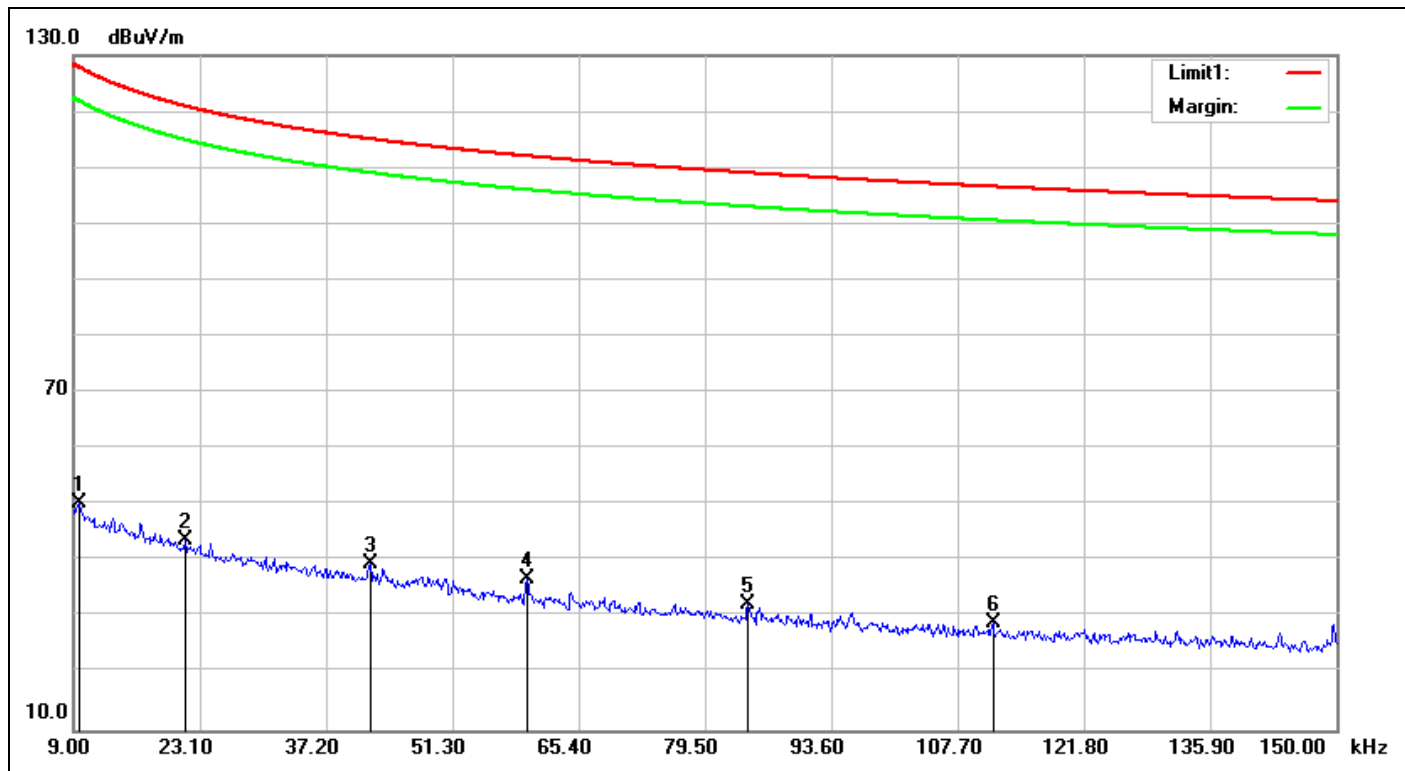

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/11/28 20:07:11
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0097	18.46	31.90	50.36	127.85	-77.49	QP	100	150	
2	0.0215	18.98	24.67	43.65	120.94	-77.29	QP	100	154	
3	0.0421	19.08	20.35	39.43	115.11	-75.68	QP	100	45	
4	0.0596	18.80	18.04	36.84	112.09	-75.25	QP	100	193	
5	0.0842	18.51	13.73	32.24	109.09	-76.85	QP	100	82	
6	0.1116	18.34	10.71	29.05	106.64	-77.59	QP	100	121	

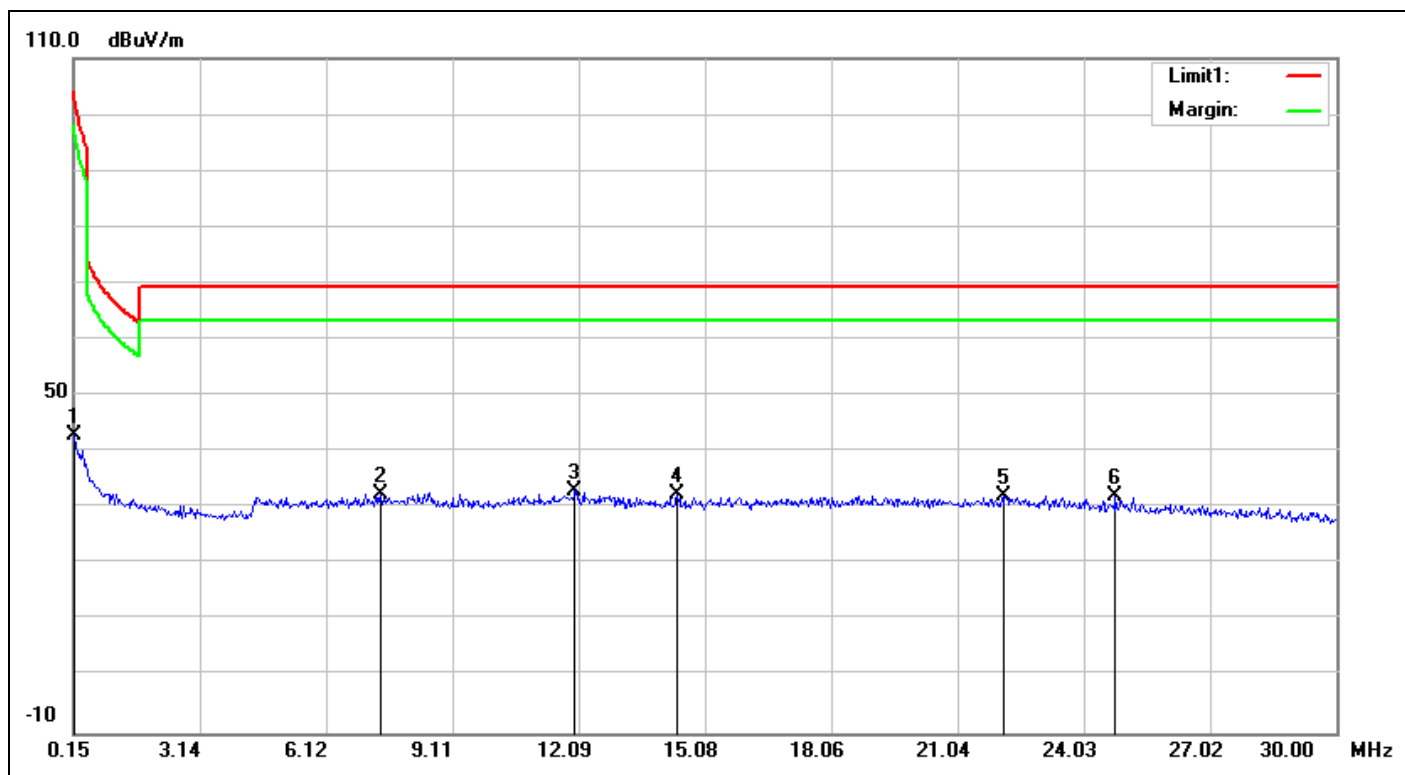

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/11/28 20:09:45
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1500	18.36	24.52	42.88	104.08	-61.20	QP	100	23	
2	7.4035	19.93	12.48	32.41	69.50	-37.09	QP	100	318	
3	12.0004	20.67	12.43	33.10	69.50	-36.40	QP	100	121	
4	14.4183	20.96	11.47	32.43	69.50	-37.07	QP	100	263	
5	22.1494	21.68	10.44	32.12	69.50	-37.38	QP	100	0	
6	24.7762	21.78	10.40	32.18	69.50	-37.32	QP	100	68	


Spurious Emissions, RX Mode, 1-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

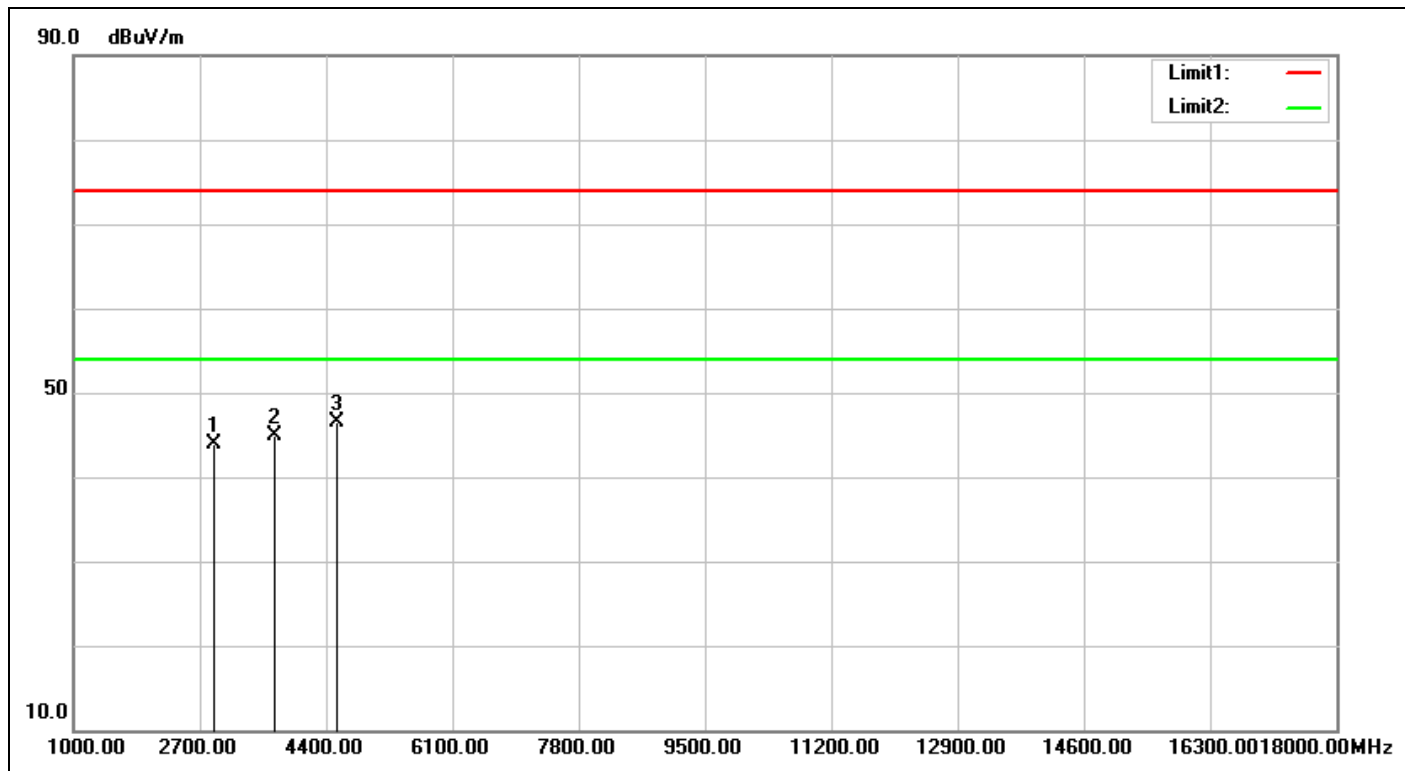

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:33:39
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2887.000	-2.58	46.45	43.87	74.00	-30.13	peak	100	89	
2	3703.000	-1.14	46.04	44.90	74.00	-29.10	peak	100	342	
3	4553.000	1.74	44.79	46.53	74.00	-27.47	peak	100	307	

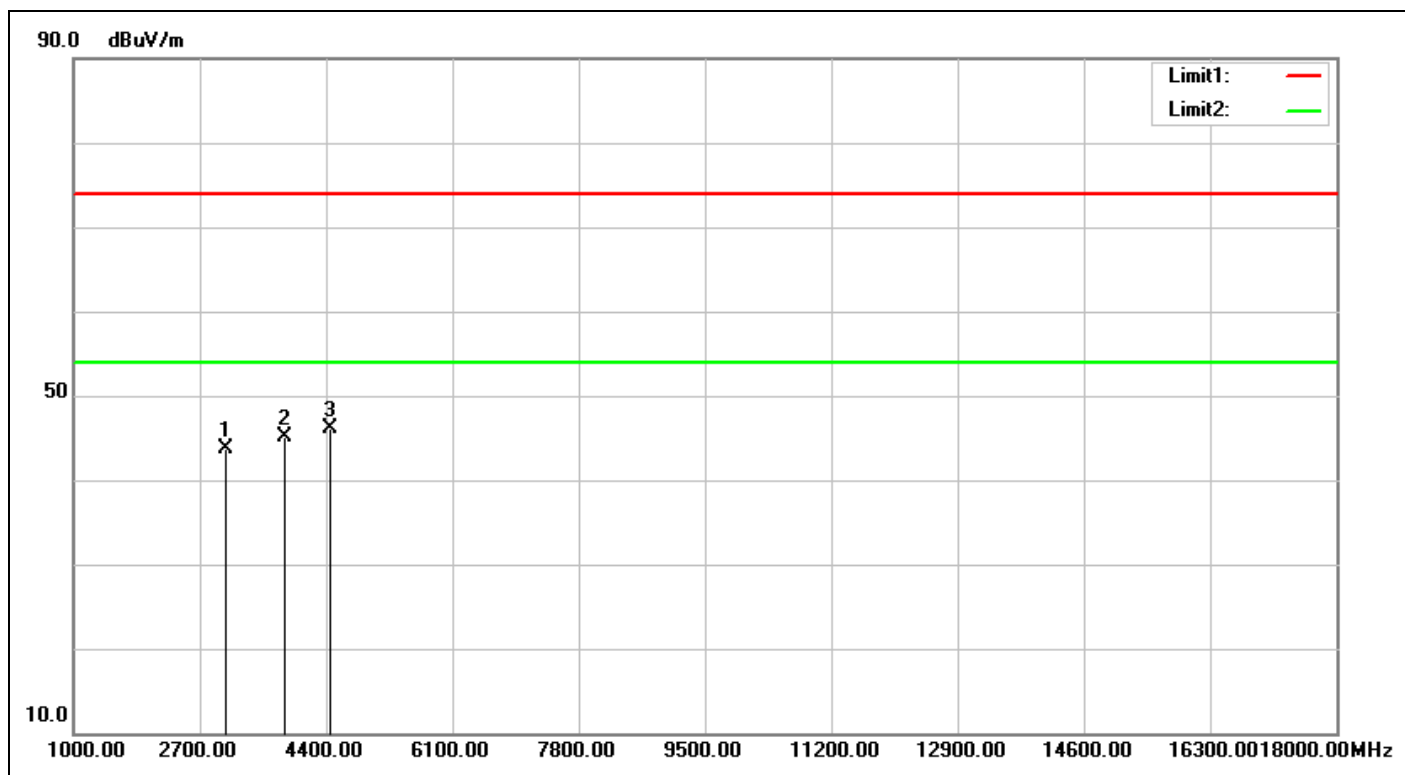

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 19:34:32
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%)	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3057.000	-2.13	45.90	43.77	74.00	-30.23	peak	100	53	
2	3839.000	-0.77	45.91	45.14	74.00	-28.86	peak	100	26	
3	4451.000	1.41	44.60	46.01	74.00	-27.99	peak	100	53	


Spurious Emissions, RX Mode, 18-26G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

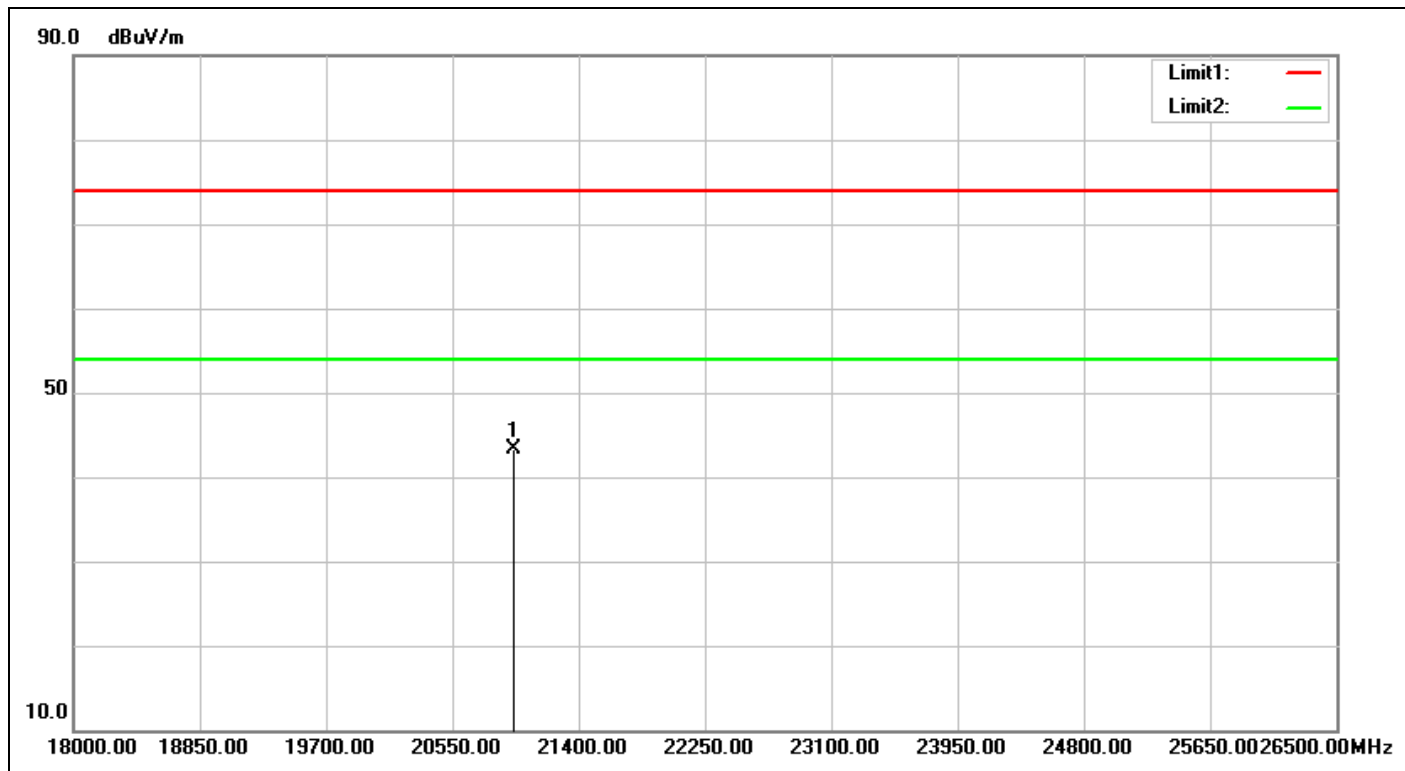

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 19:49:10
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20958.000	4.73	38.56	43.29	74.00	-30.71	peak	100	30	

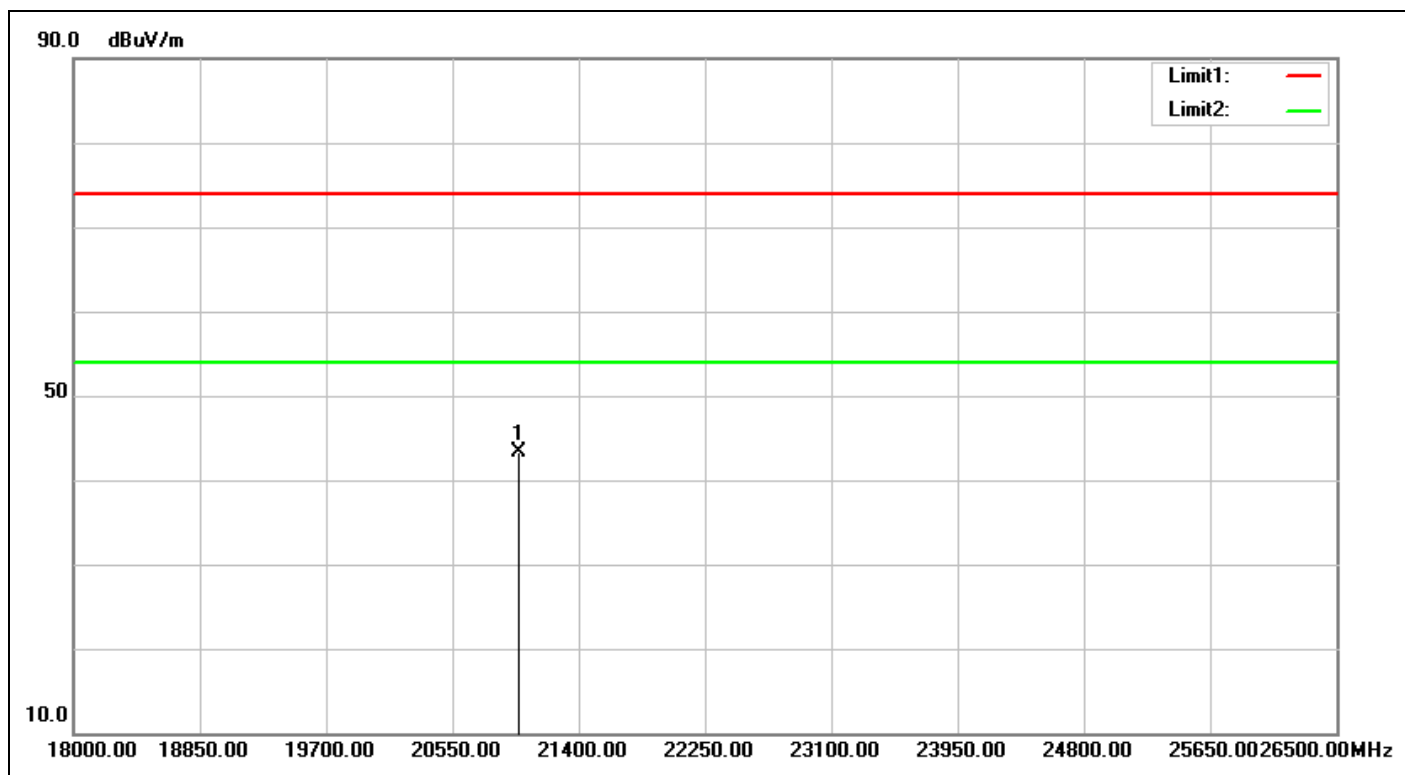

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 19:49:16
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21000.500	4.79	38.44	43.23	74.00	-30.77	peak	100	0	


Spurious Emissions, RX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

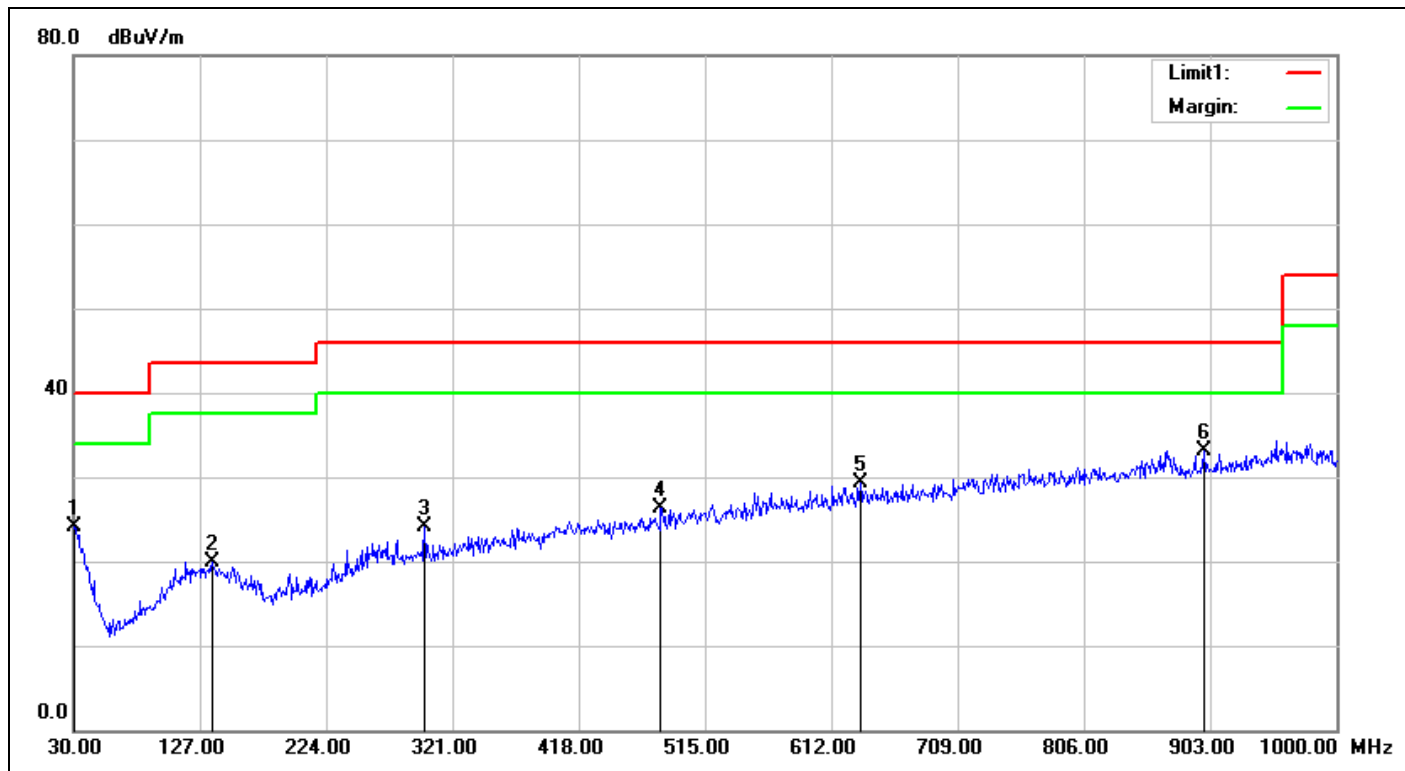

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/11/28 20:02:07
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%)	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	24.18	24.15	40.00	-15.85	QP	100	220	
2	136.7000	-7.02	26.98	19.96	43.50	-23.54	QP	100	10	
3	299.6600	-4.56	28.62	24.06	46.00	-21.94	QP	100	263	
4	481.0500	-1.51	27.84	26.33	46.00	-19.67	QP	100	6	
5	634.3099	0.76	28.45	29.21	46.00	-16.79	QP	100	292	
6	898.1500	4.37	28.81	33.18	46.00	-12.82	QP	100	170	

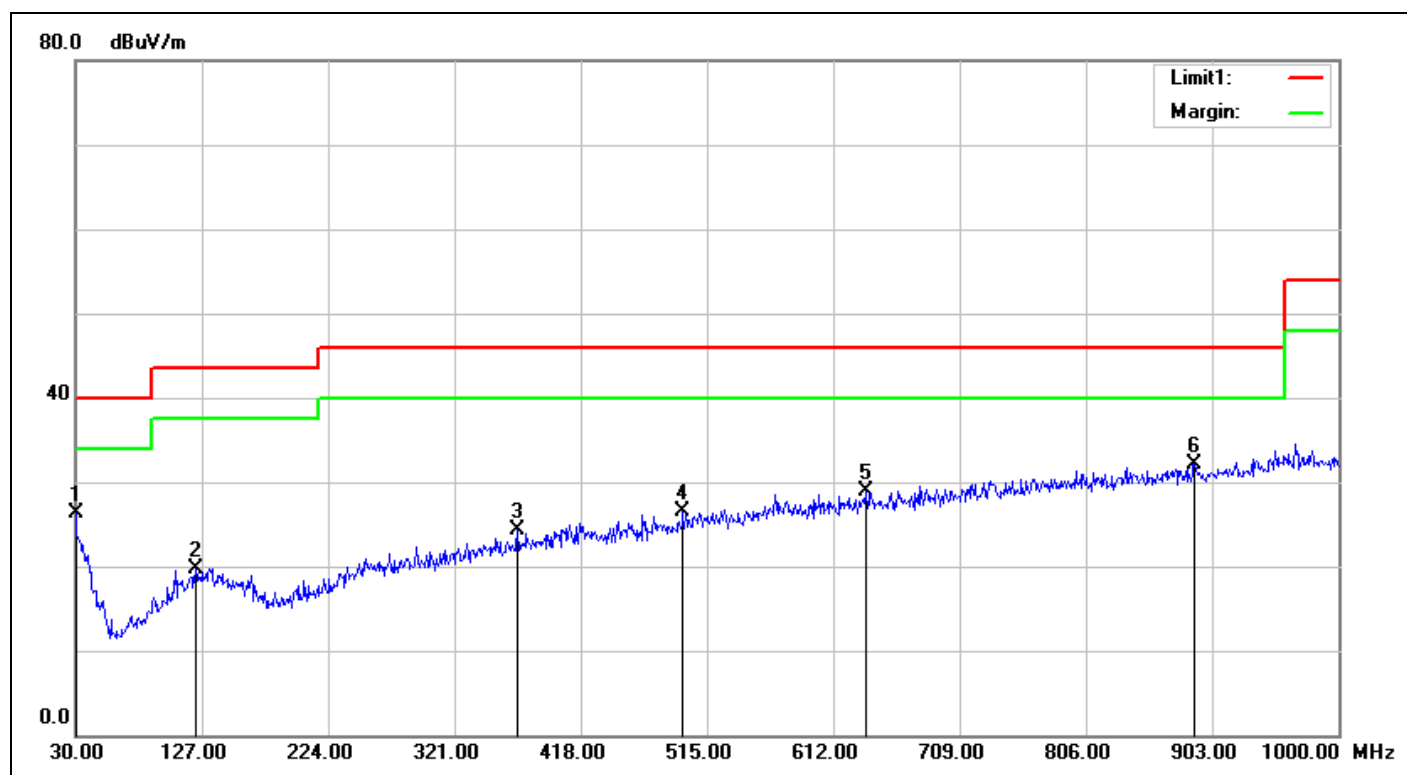

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/11/28 20:03:00
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%)	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	26.32	26.29	40.00	-13.71	QP	100	164	
2	122.1500	-7.32	27.08	19.76	43.50	-23.74	QP	100	253	
3	369.5000	-3.04	27.31	24.27	46.00	-21.73	QP	100	91	
4	496.5700	-1.20	27.61	26.41	46.00	-19.59	QP	100	124	
5	637.2200	0.78	28.04	28.82	46.00	-17.18	QP	100	13	
6	889.4200	4.17	27.95	32.12	46.00	-13.88	QP	100	199	


Spurious Emissions, RX Mode, 9K-30M



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

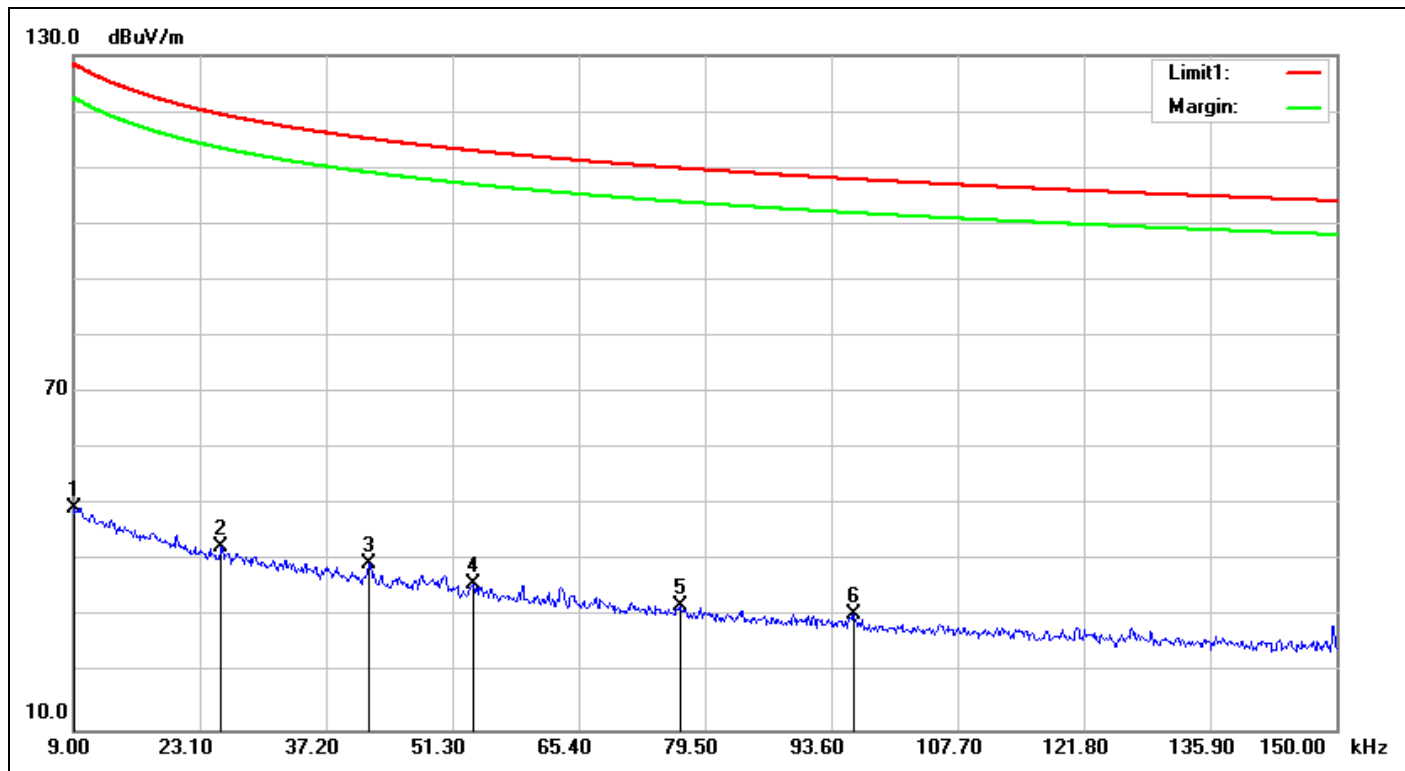

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/11/28 20:08:04
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0090	18.32	31.22	49.54	128.50	-78.96	QP	100	62	
2	0.0255	19.14	23.52	42.66	119.46	-76.80	QP	100	311	
3	0.0420	19.08	20.38	39.46	115.13	-75.67	QP	100	105	
4	0.0537	18.88	17.08	35.96	112.99	-77.03	QP	100	311	
5	0.0767	18.60	13.50	32.10	109.90	-77.80	QP	100	360	
6	0.0961	18.38	12.13	30.51	107.94	-77.43	QP	100	348	

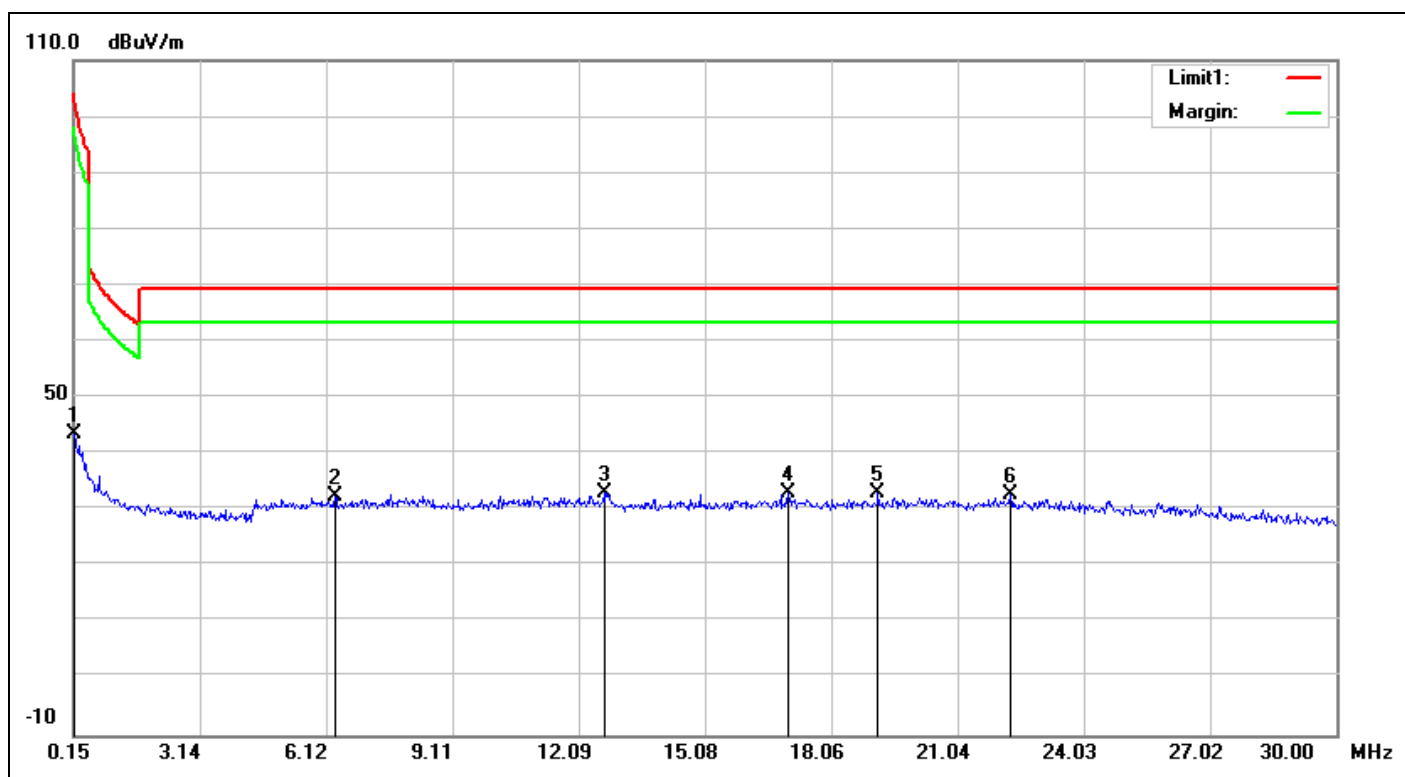

Service No.:	114083854	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/11/28 20:10:38
Applicant:	Remotec Technology Ltd.	Test Rating:	DC 3V
Product:	BT REMOTE CONTROL	Temp.(°C)/Hum.(%):	20(°C)/55%
Model No.:	BW7640UN	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1799	18.37	25.32	43.69	102.50	-58.81	QP	100	203	
2	6.3290	19.73	12.71	32.44	69.50	-37.06	QP	100	288	
3	12.6870	20.76	12.20	32.96	69.50	-36.54	QP	100	223	
4	17.0451	21.26	11.69	32.95	69.50	-36.55	QP	100	111	
5	19.1645	21.51	11.63	33.14	69.50	-36.36	QP	100	6	
6	22.2987	21.69	11.18	32.87	69.50	-36.63	QP	100	183	