


Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

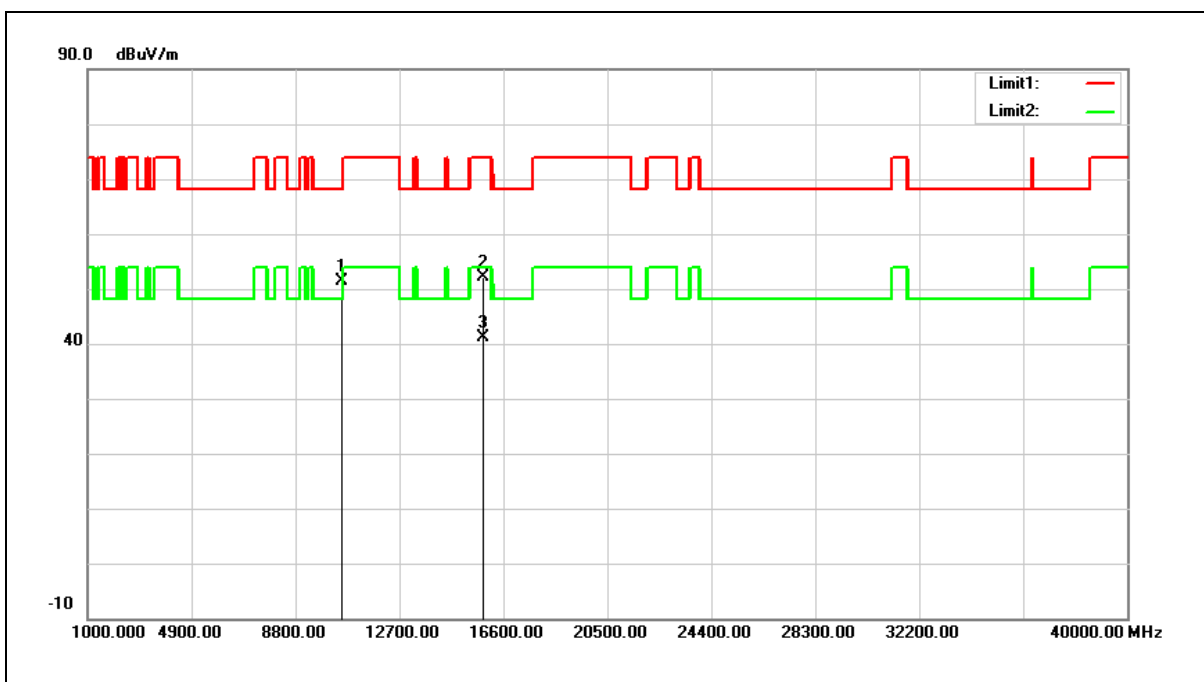


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.52	17.81	51.33	68.20	-16.87	peak
2	15840.000	32.19	20.00	52.19	74.00	-21.81	peak
3	15840.000	21.07	20.00	41.07	54.00	-12.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

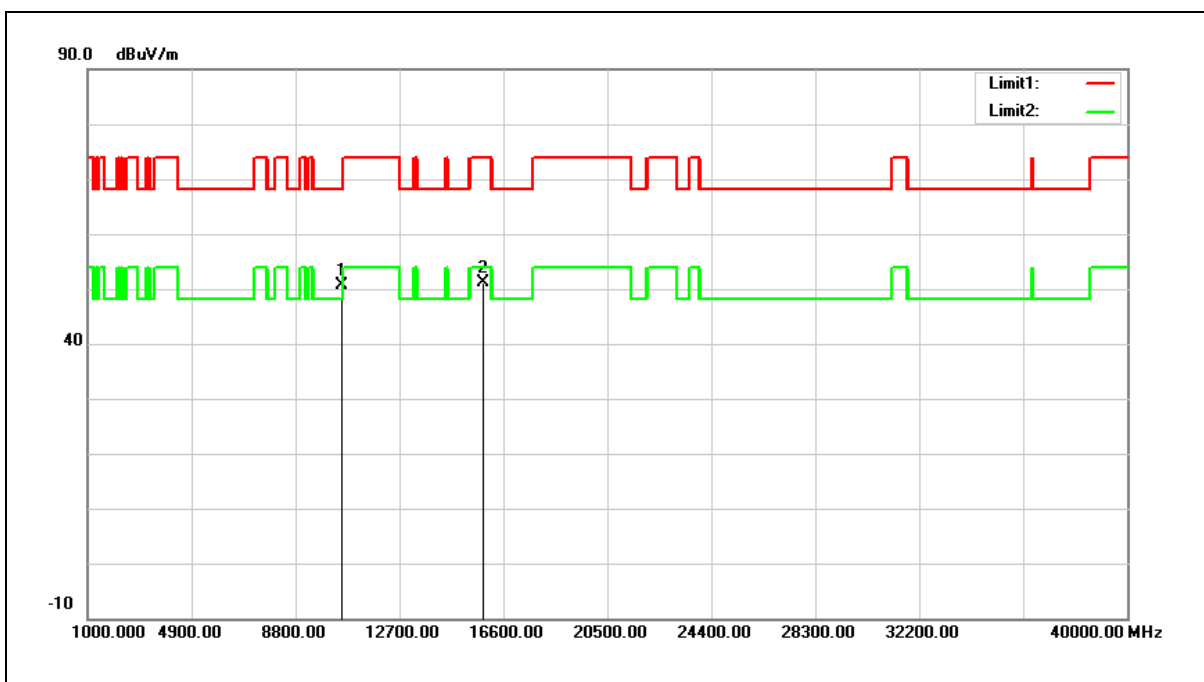


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	32.76	17.81	50.57	68.20	-17.63	peak
2	15840.000	31.25	20.00	51.25	74.00	-22.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

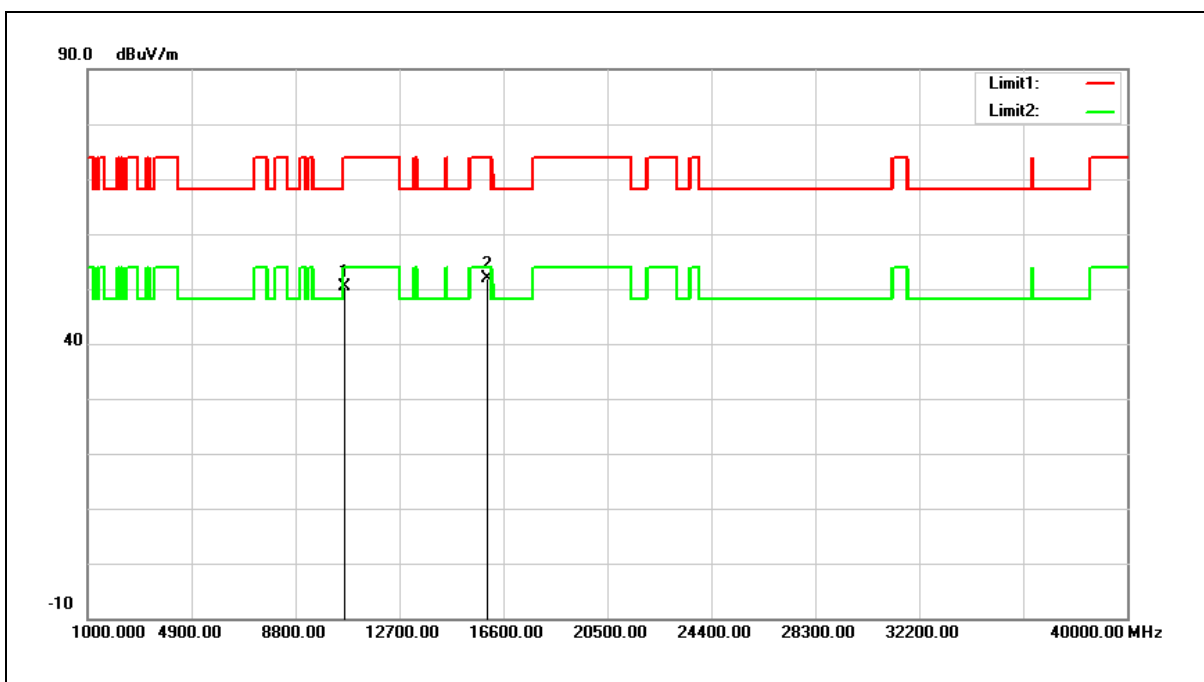


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.34	17.96	50.30	74.00	-23.70	peak
2	15960.000	32.28	19.71	51.99	74.00	-22.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

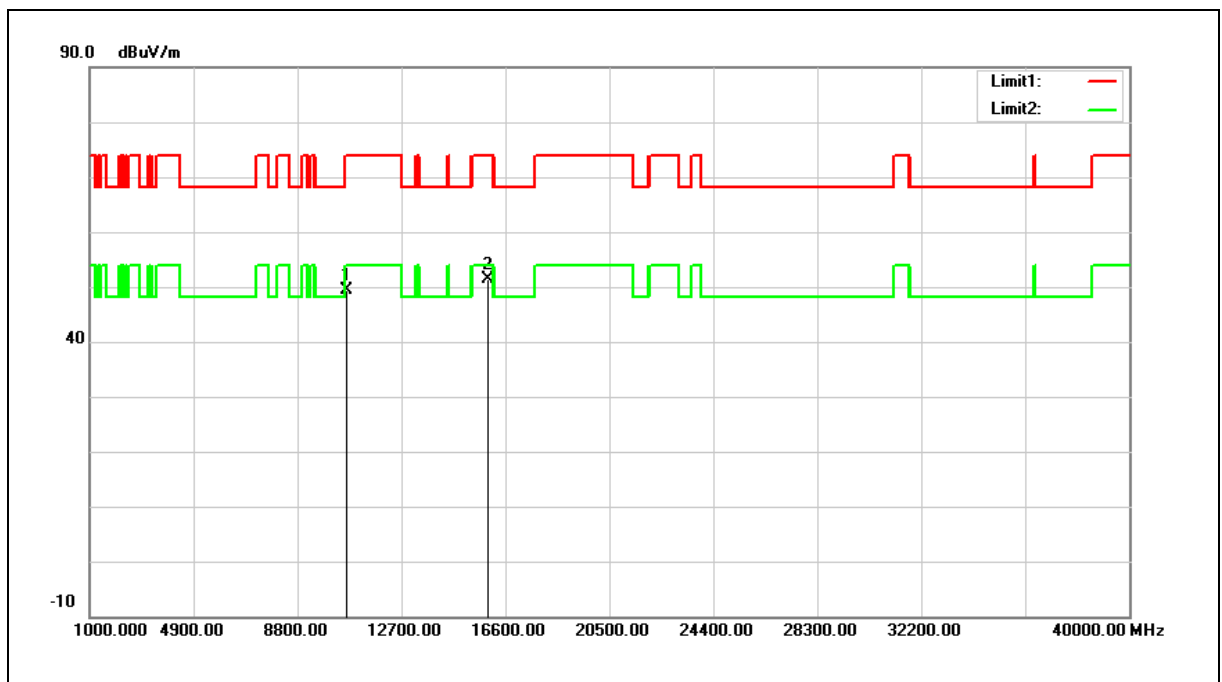


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.51	17.96	49.47	74.00	-24.53	peak
2	15960.000	31.75	19.71	51.46	74.00	-22.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

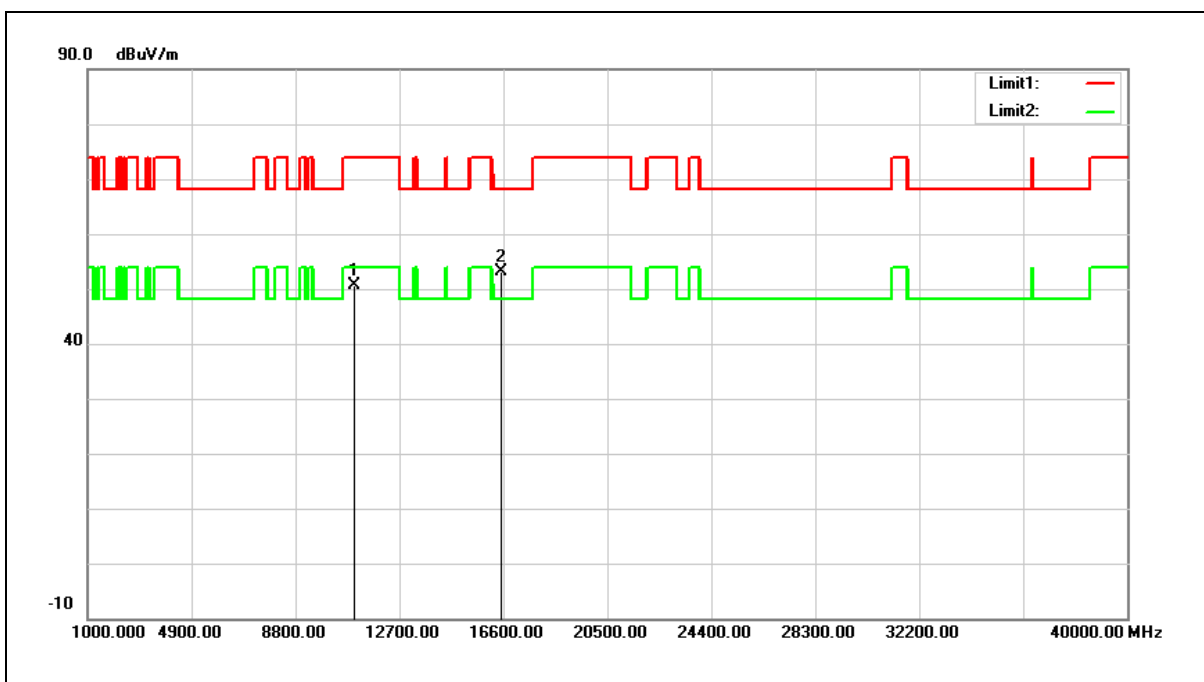


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	31.96	18.63	50.59	74.00	-23.41	peak
2	16500.000	31.59	21.66	53.25	68.20	-14.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

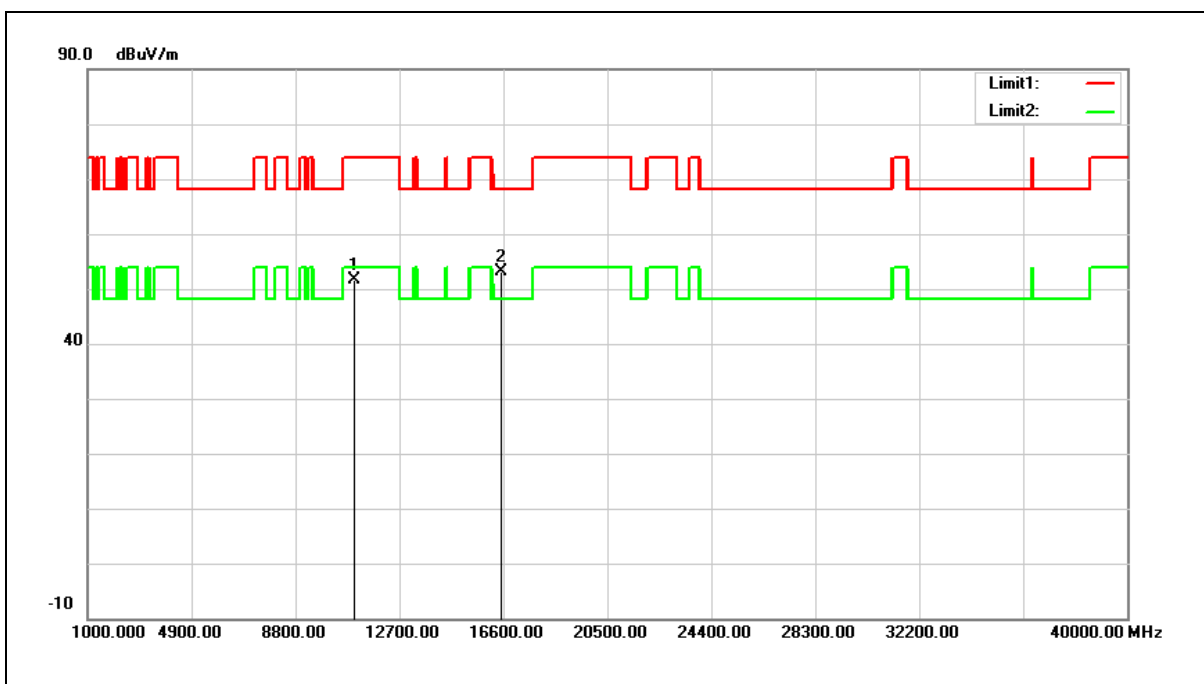


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.99	18.63	51.62	74.00	-22.38	peak
2	16500.000	31.39	21.66	53.05	68.20	-15.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

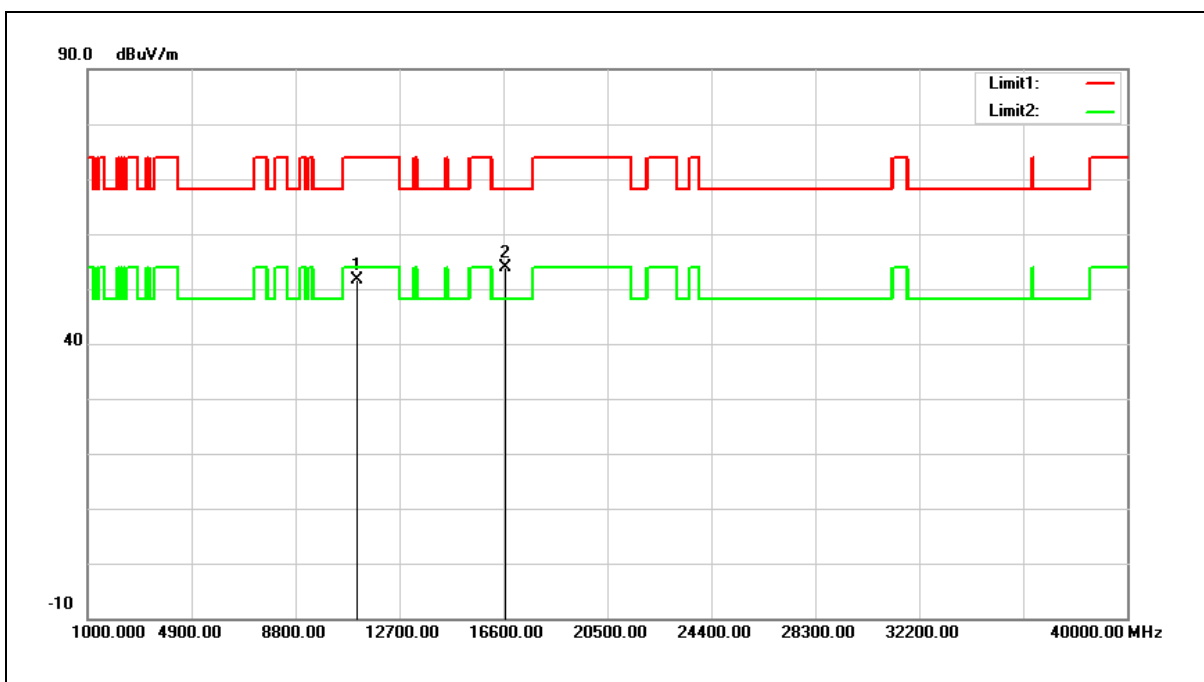


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.70	18.83	51.53	74.00	-22.47	peak
2	16680.000	31.35	22.64	53.99	68.20	-14.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

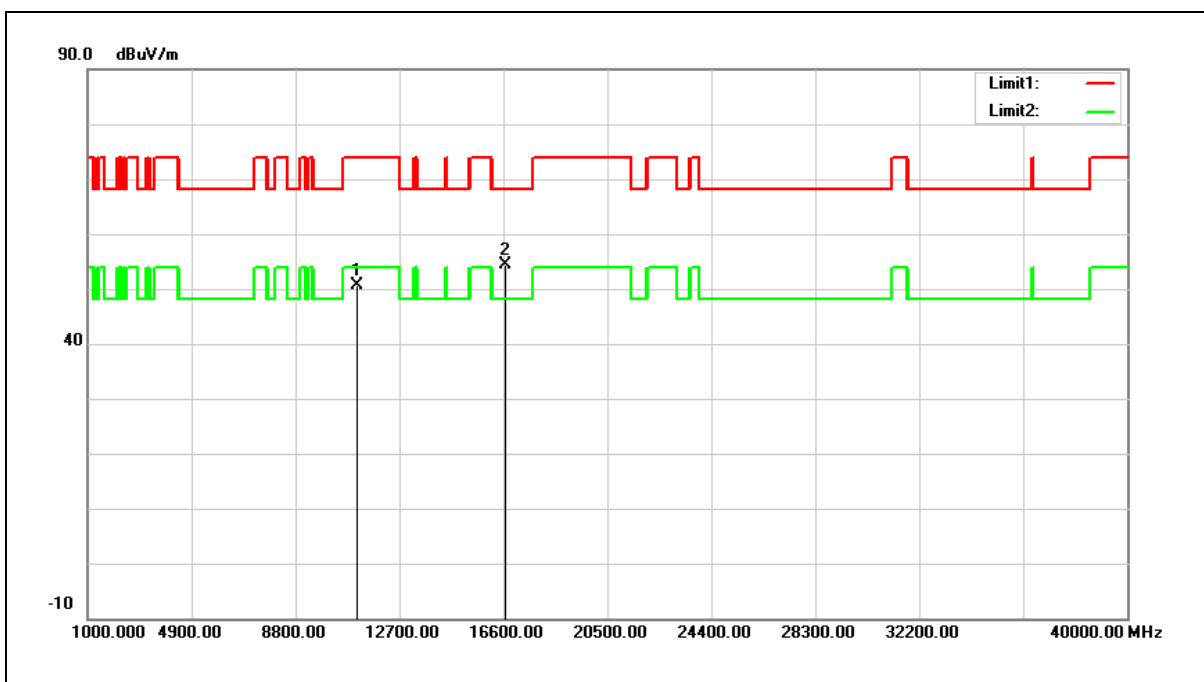


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	31.68	18.83	50.51	74.00	-23.49	peak
2	16680.000	31.82	22.64	54.46	68.20	-13.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

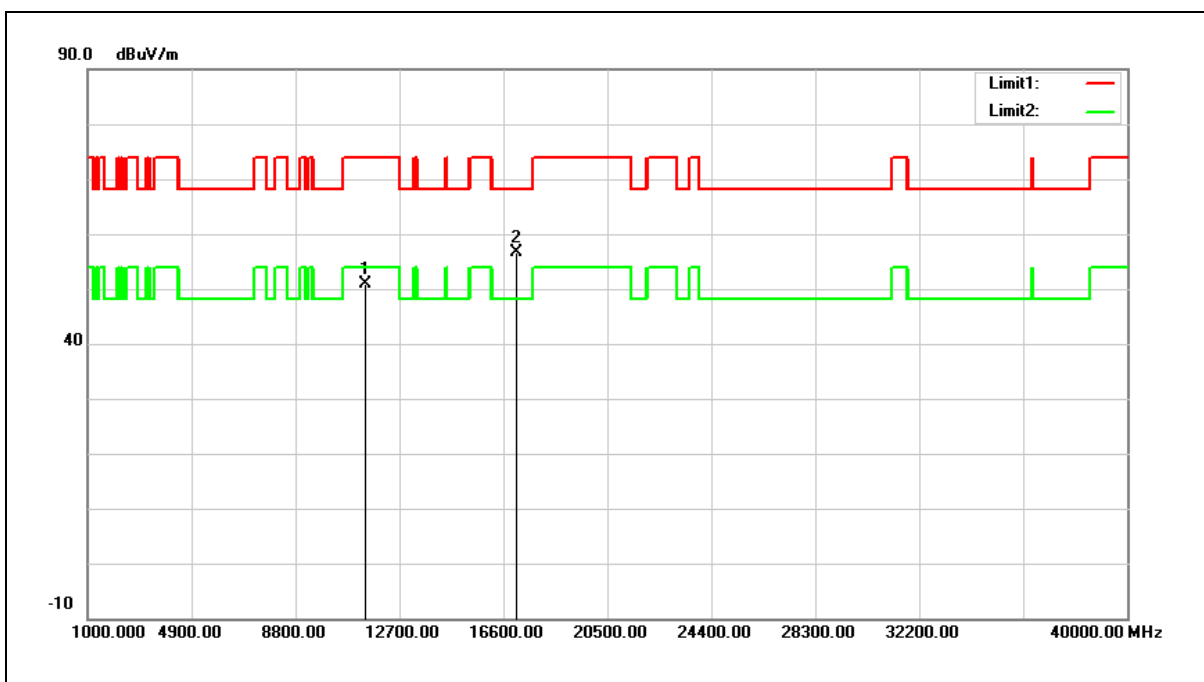


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.67	19.30	50.97	74.00	-23.03	peak
2	17100.000	31.94	24.65	56.59	68.20	-11.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

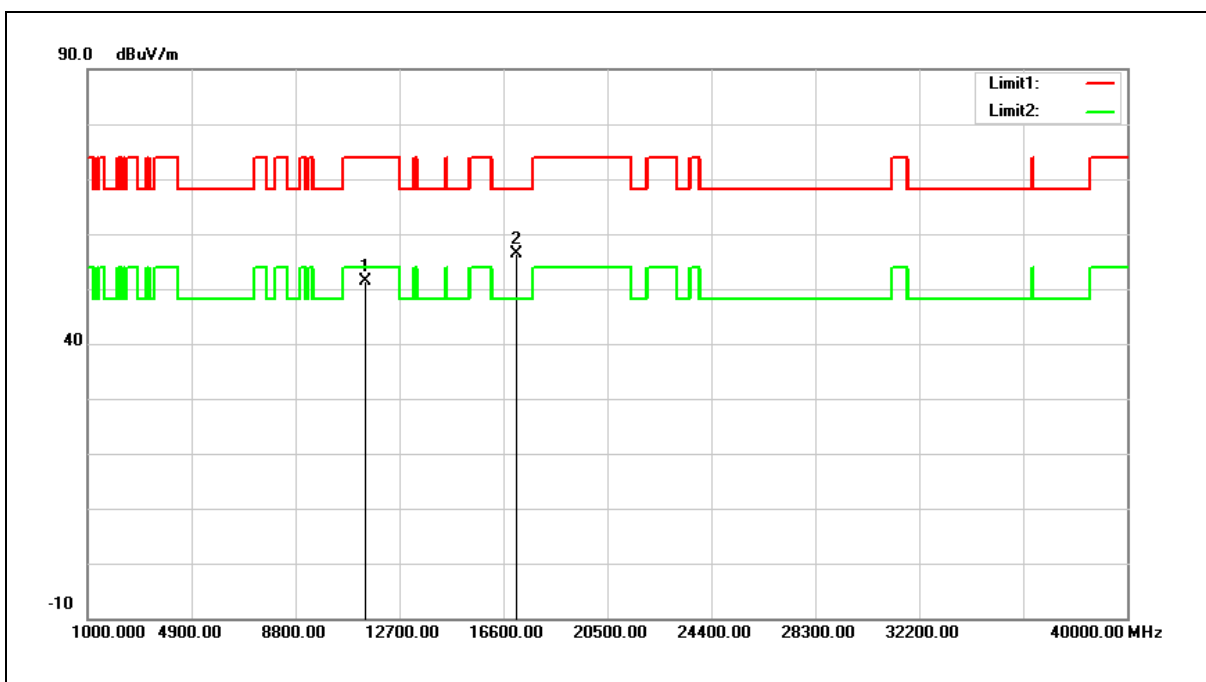


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.08	19.30	51.38	74.00	-22.62	peak
2	17100.000	31.71	24.65	56.36	68.20	-11.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

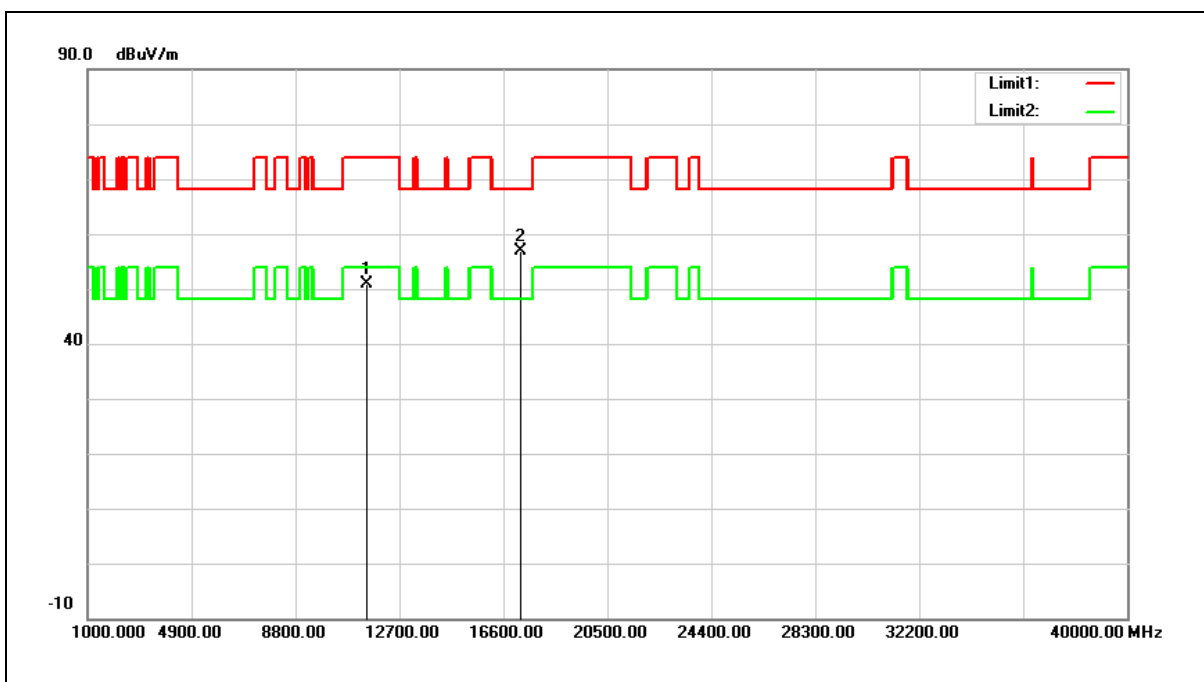


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	31.42	19.45	50.87	74.00	-23.13	peak
2	17235.000	31.75	25.01	56.76	68.20	-11.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

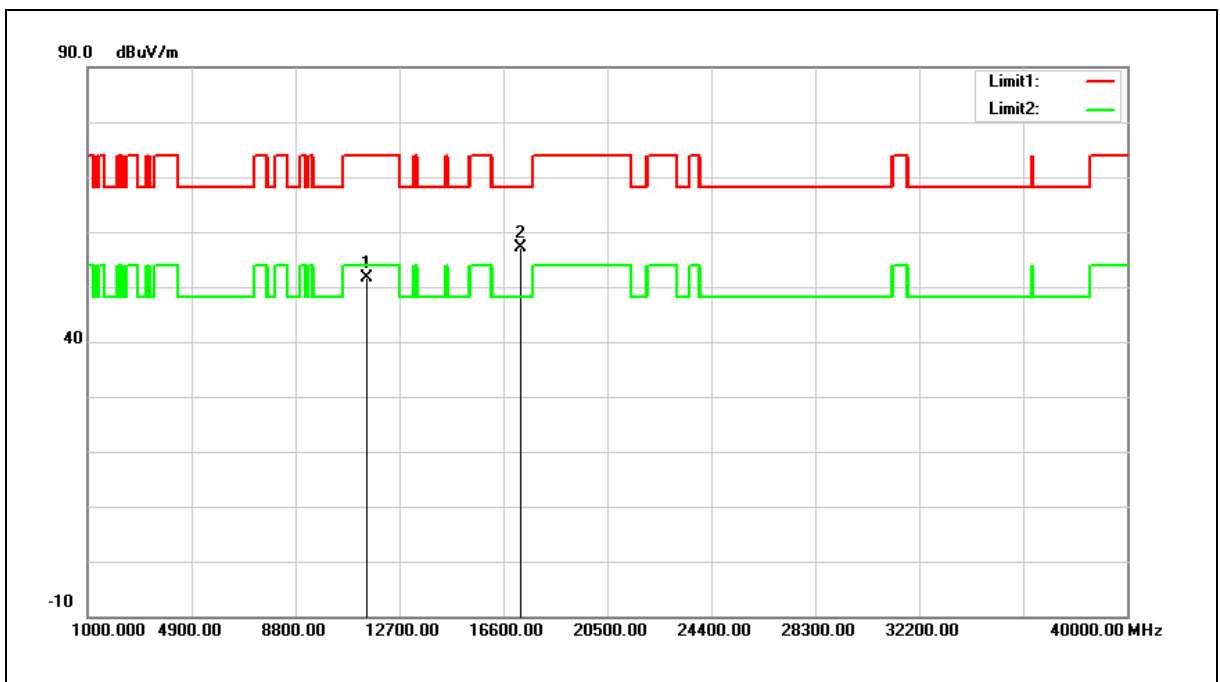


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.26	19.45	51.71	74.00	-22.29	peak
2	17235.000	32.12	25.01	57.13	68.20	-11.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

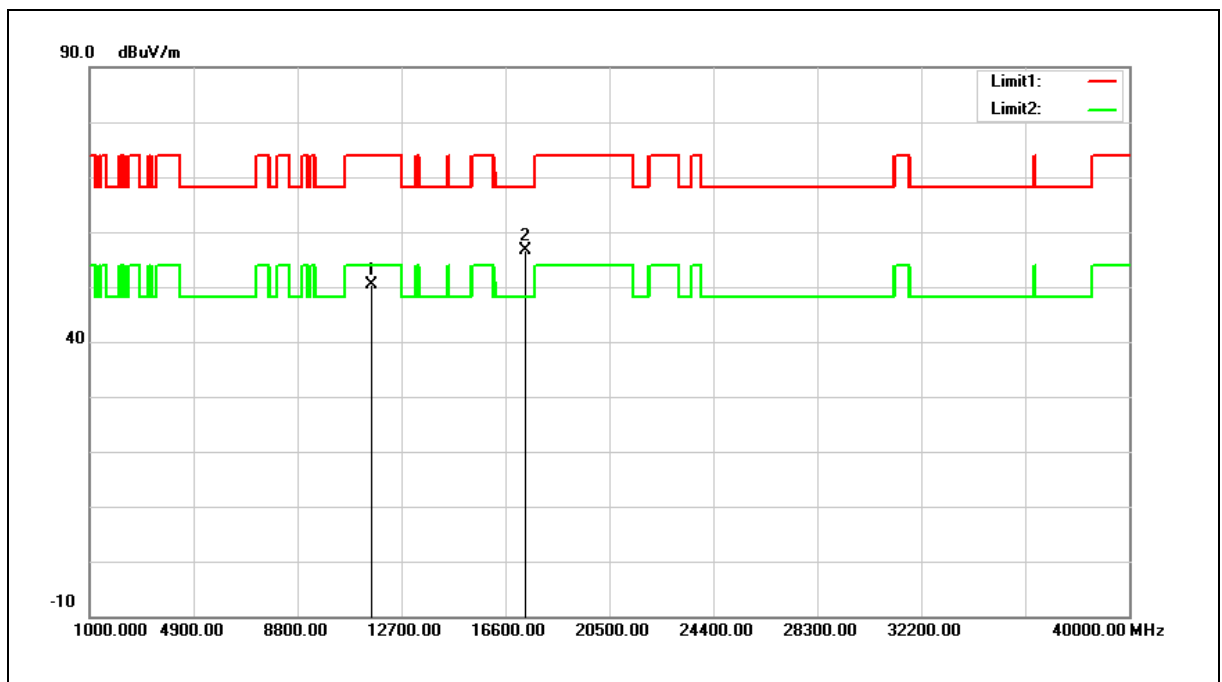


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.08	19.39	50.47	74.00	-23.53	peak
2	17355.000	31.25	25.34	56.59	68.20	-11.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

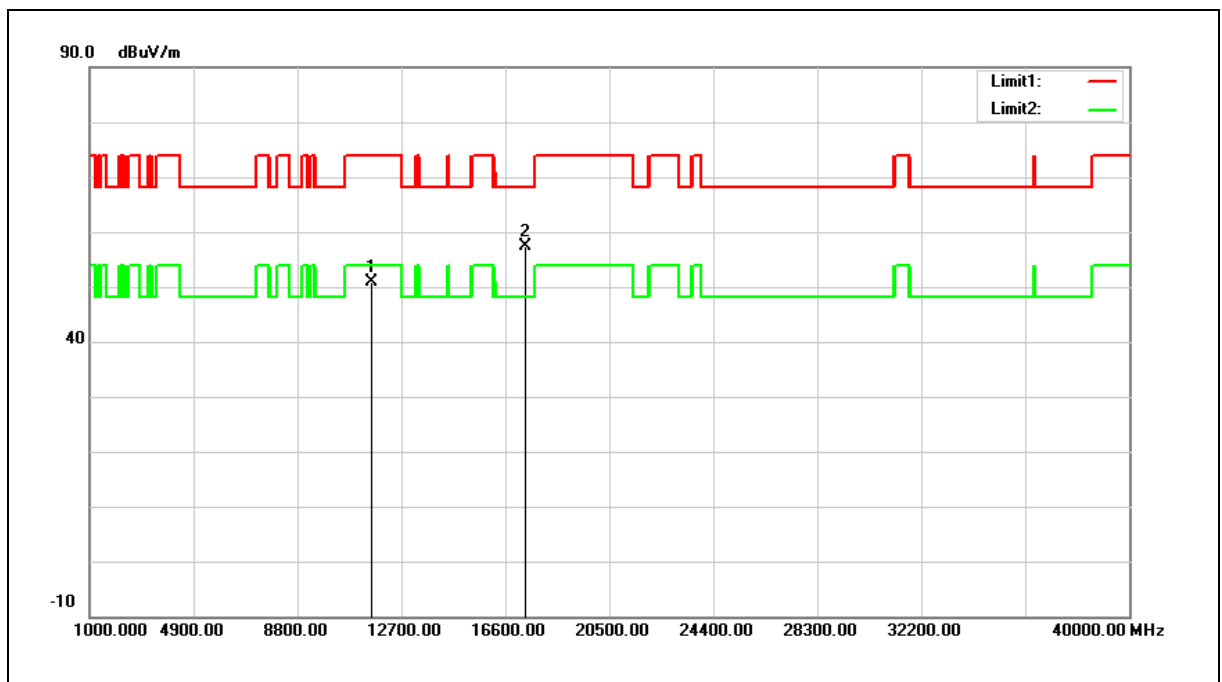


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.56	19.39	50.95	74.00	-23.05	peak
2	17355.000	31.96	25.34	57.30	68.20	-10.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

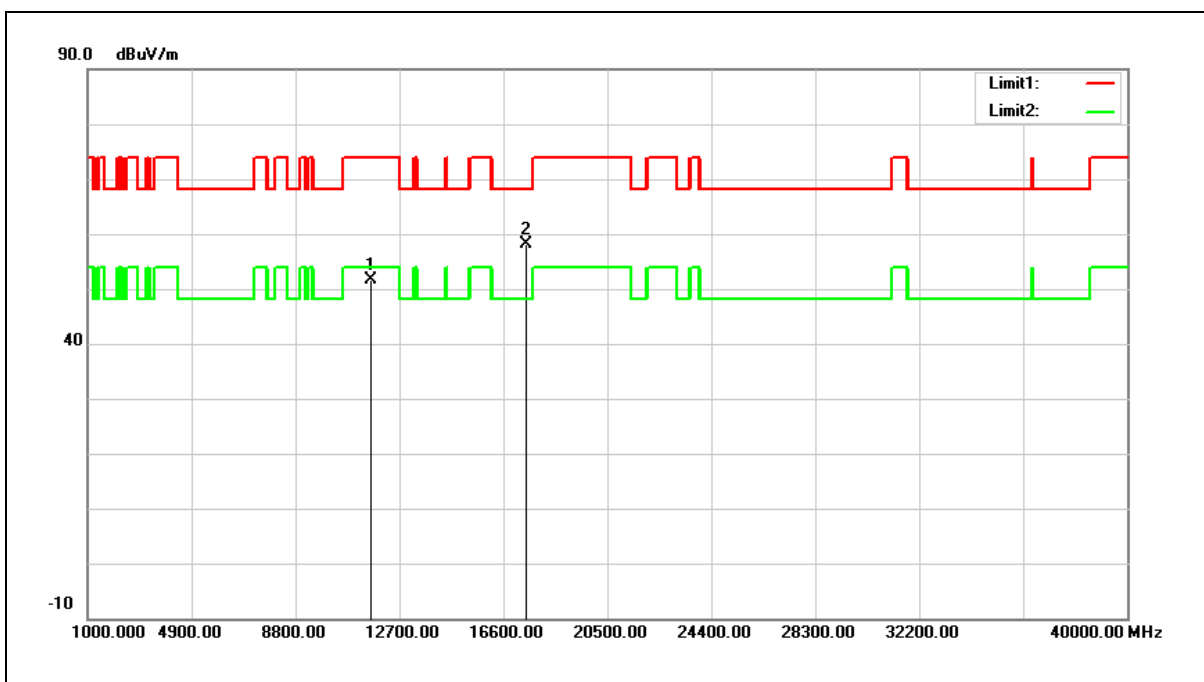


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	32.26	19.32	51.58	74.00	-22.42	peak
2	17475.000	32.40	25.65	58.05	68.20	-10.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

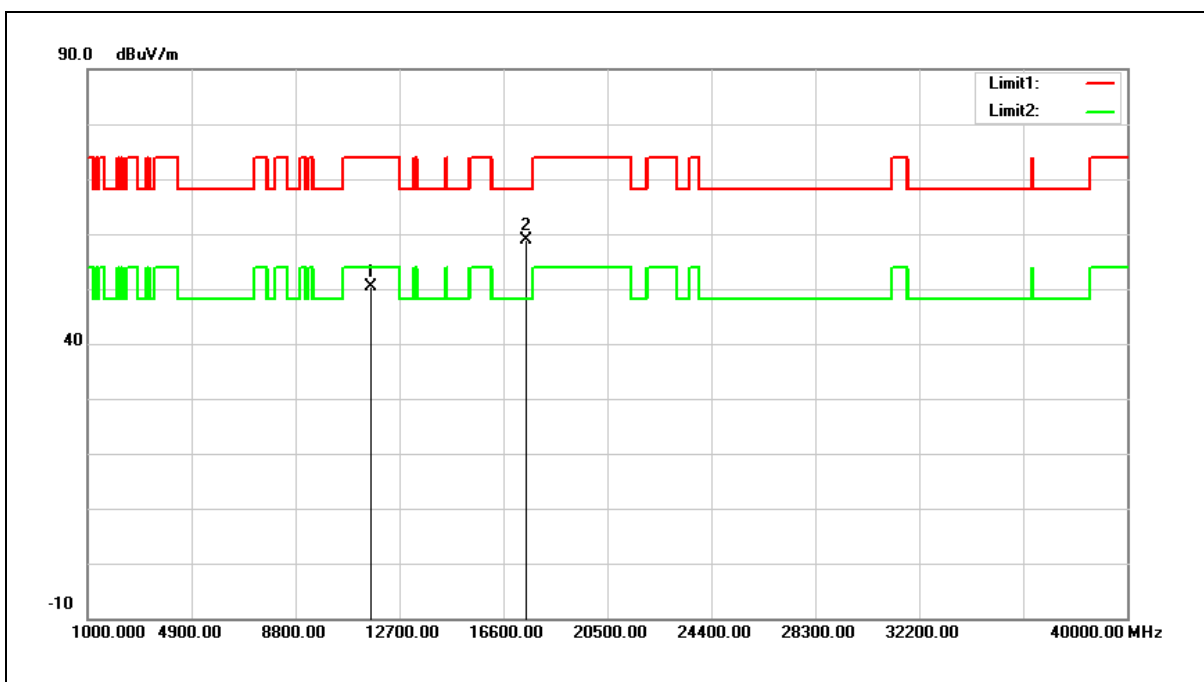


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.02	19.32	50.34	74.00	-23.66	peak
2	17475.000	33.15	25.65	58.80	68.20	-9.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

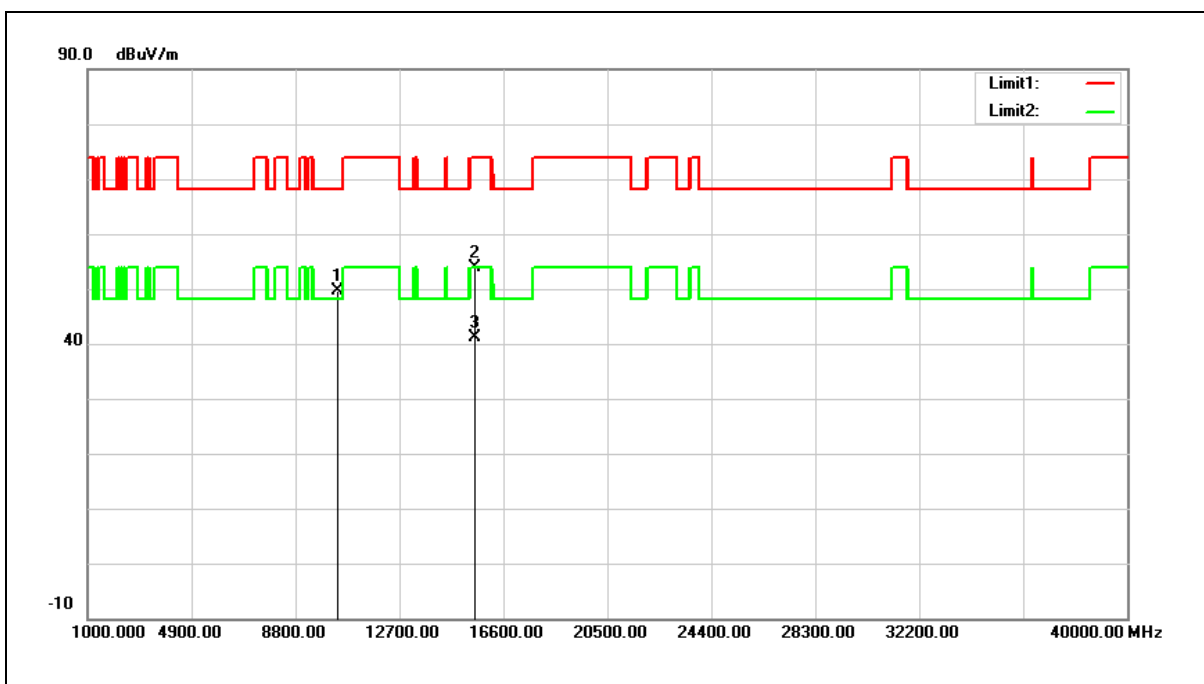


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.32	17.29	49.61	68.20	-18.59	peak
2	15540.000	33.09	20.75	53.84	74.00	-20.16	peak
3	15540.000	20.47	20.75	41.22	54.00	-12.78	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

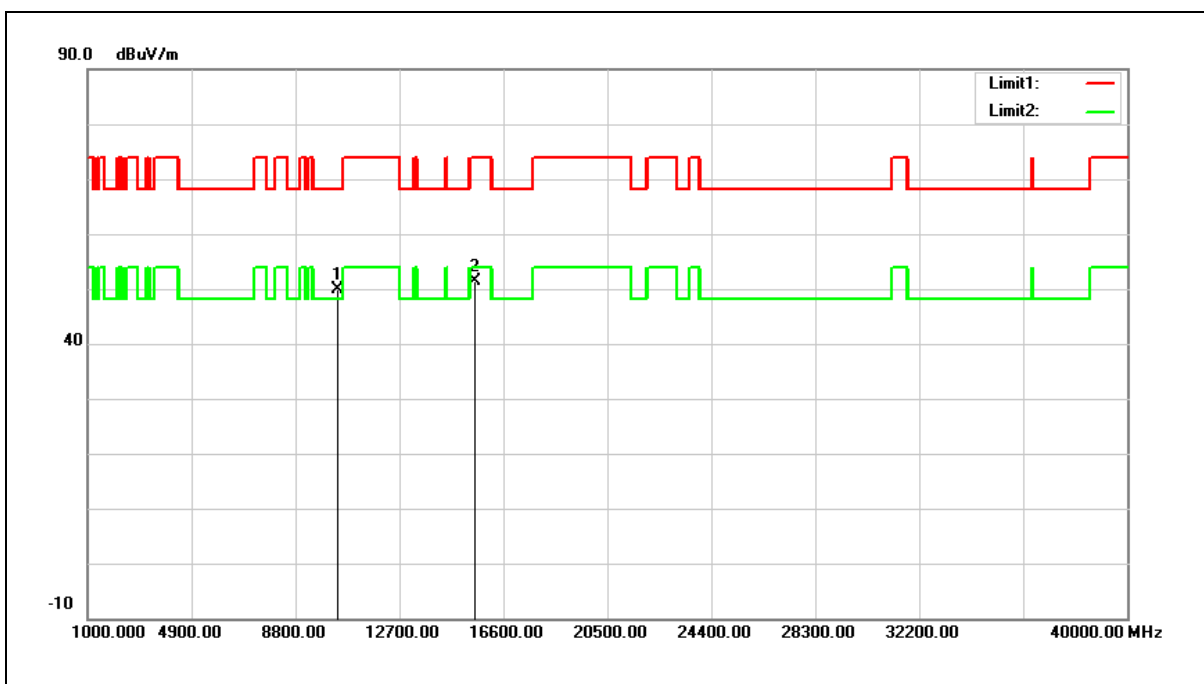


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.55	17.29	49.84	68.20	-18.36	peak
2	15540.000	30.72	20.75	51.47	74.00	-22.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

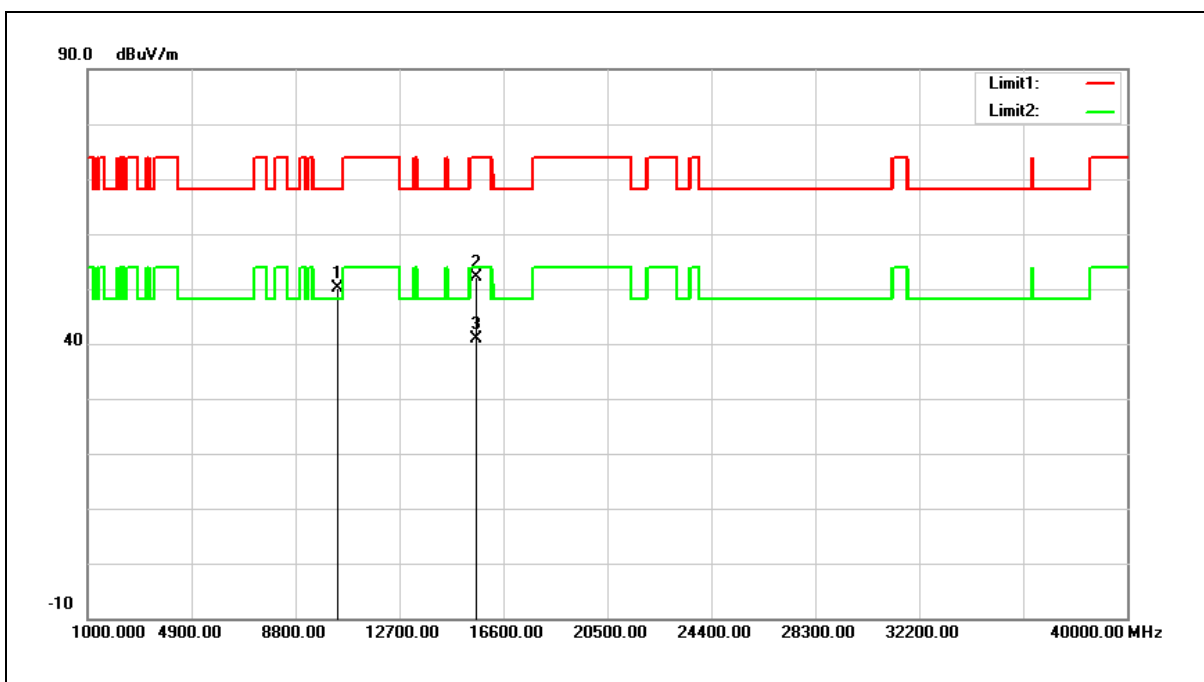


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	32.73	17.40	50.13	68.20	-18.07	peak
2	15600.000	31.58	20.60	52.18	74.00	-21.82	peak
3	15600.000	20.26	20.60	40.86	54.00	-13.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

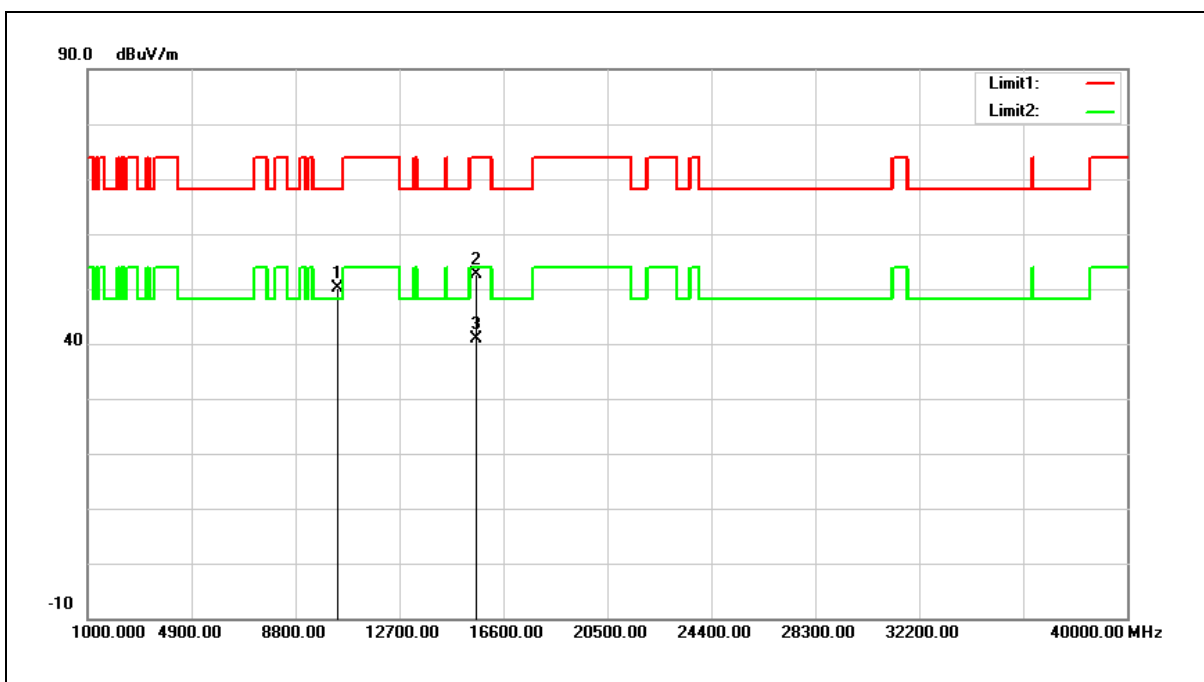


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	32.73	17.40	50.13	68.20	-18.07	peak
2	15600.000	32.03	20.60	52.63	74.00	-21.37	peak
3	15600.000	20.34	20.60	40.94	54.00	-13.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

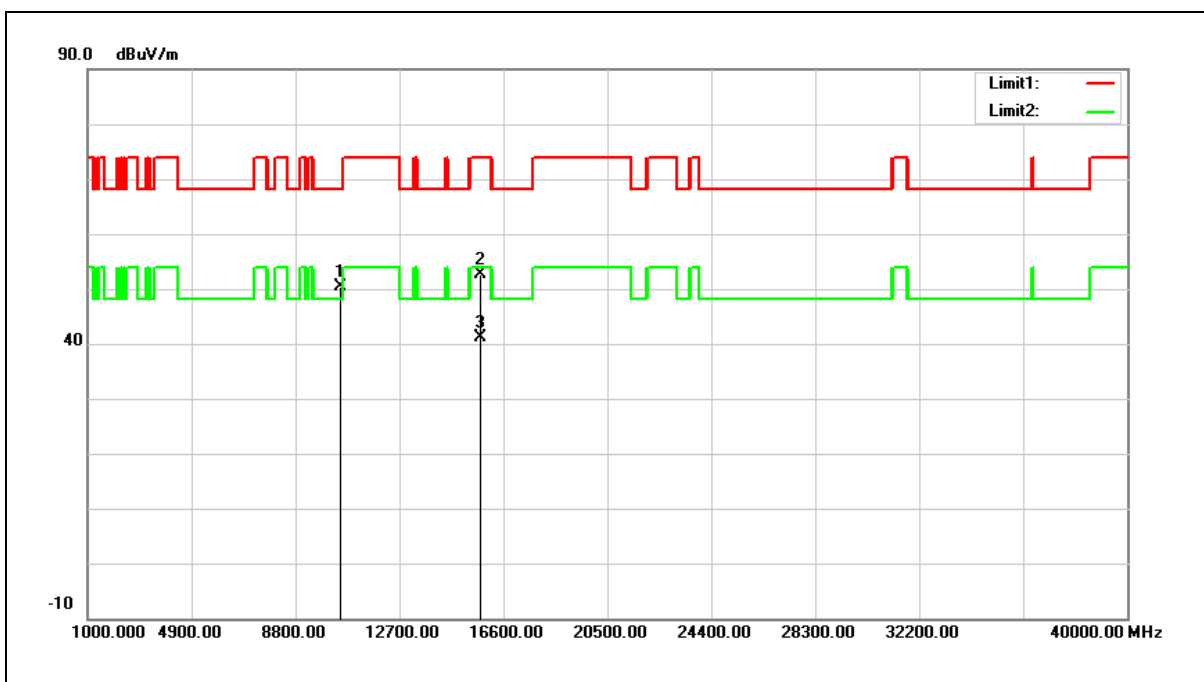


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	32.70	17.64	50.34	68.20	-17.86	peak
2	15720.000	32.32	20.30	52.62	74.00	-21.38	peak
3	15720.000	20.89	20.30	41.19	54.00	-12.81	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

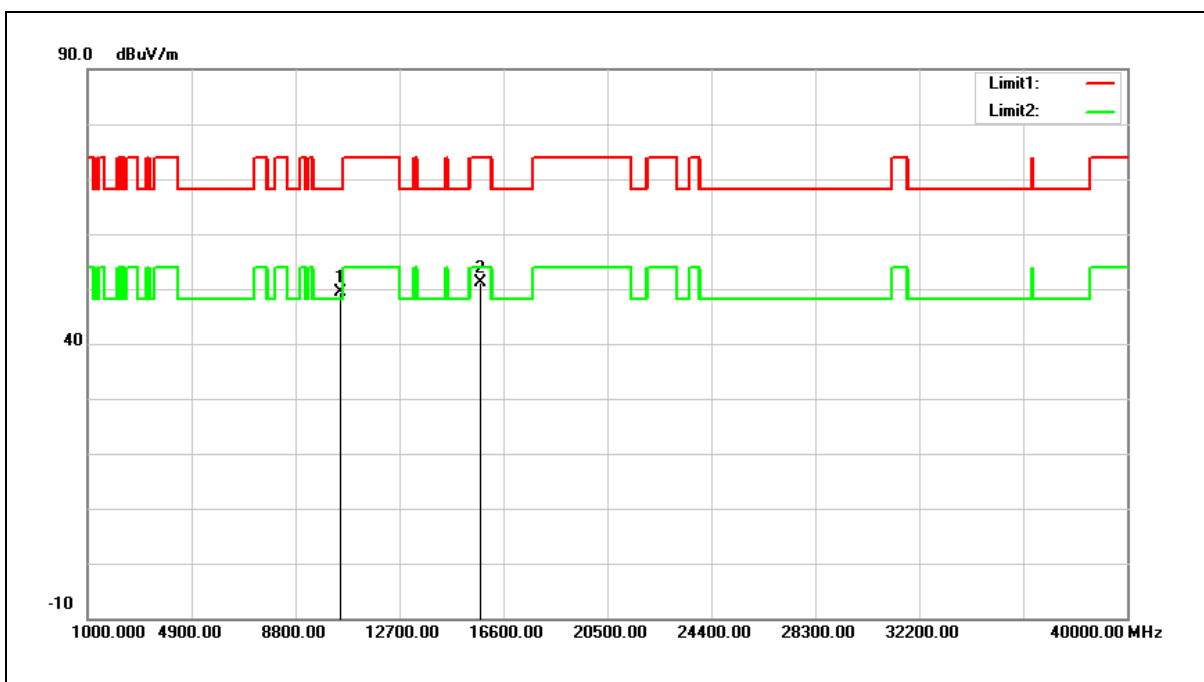


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.69	17.64	49.33	68.20	-18.87	peak
2	15720.000	30.73	20.30	51.03	74.00	-22.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

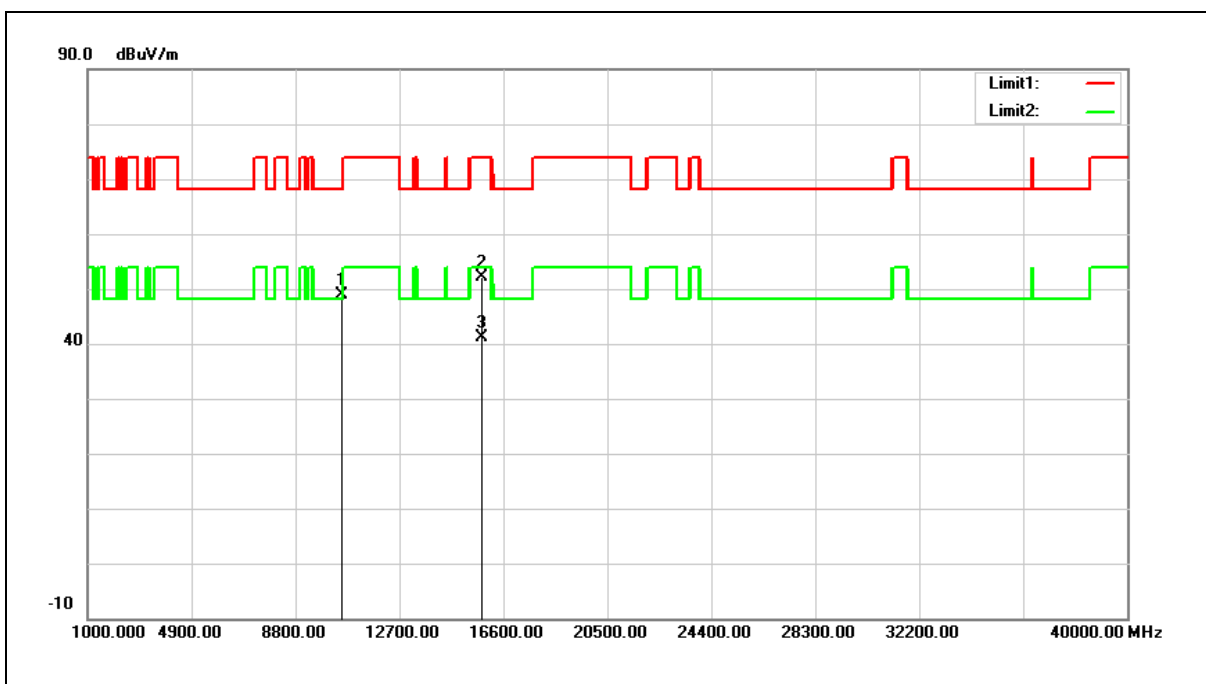


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	31.16	17.74	48.90	68.20	-19.30	peak
2	15780.000	31.97	20.15	52.12	74.00	-21.88	peak
3	15780.000	20.99	20.15	41.14	54.00	-12.86	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

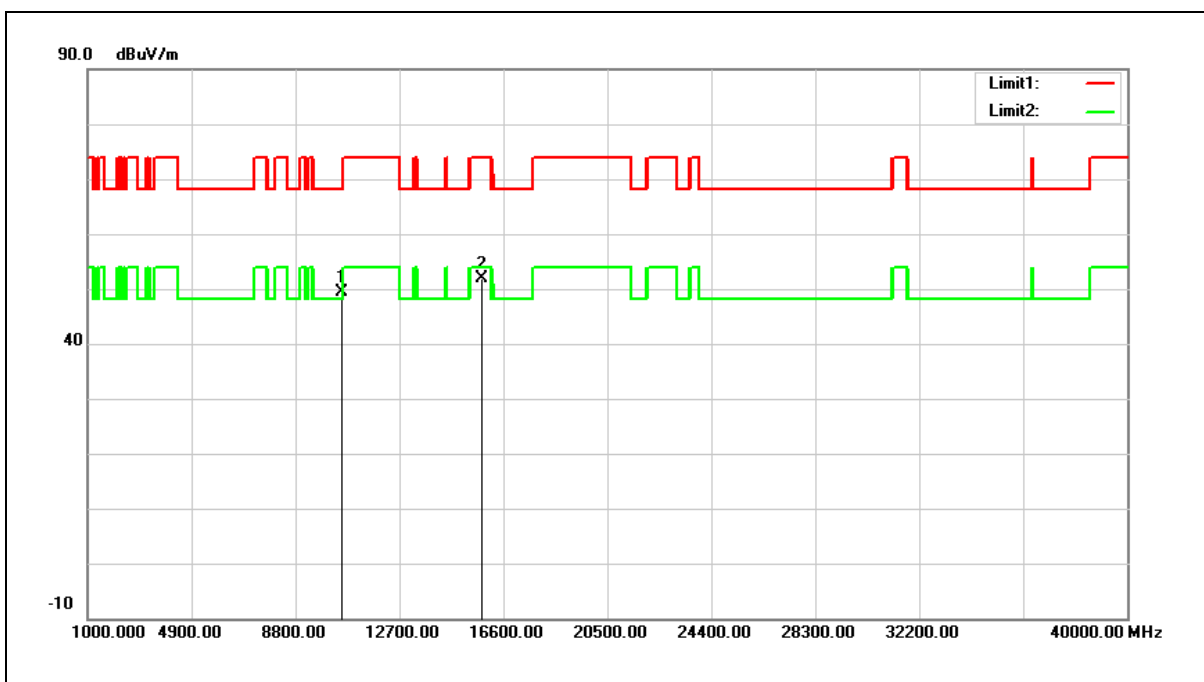


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	31.52	17.74	49.26	68.20	-18.94	peak
2	15780.000	31.73	20.15	51.88	74.00	-22.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

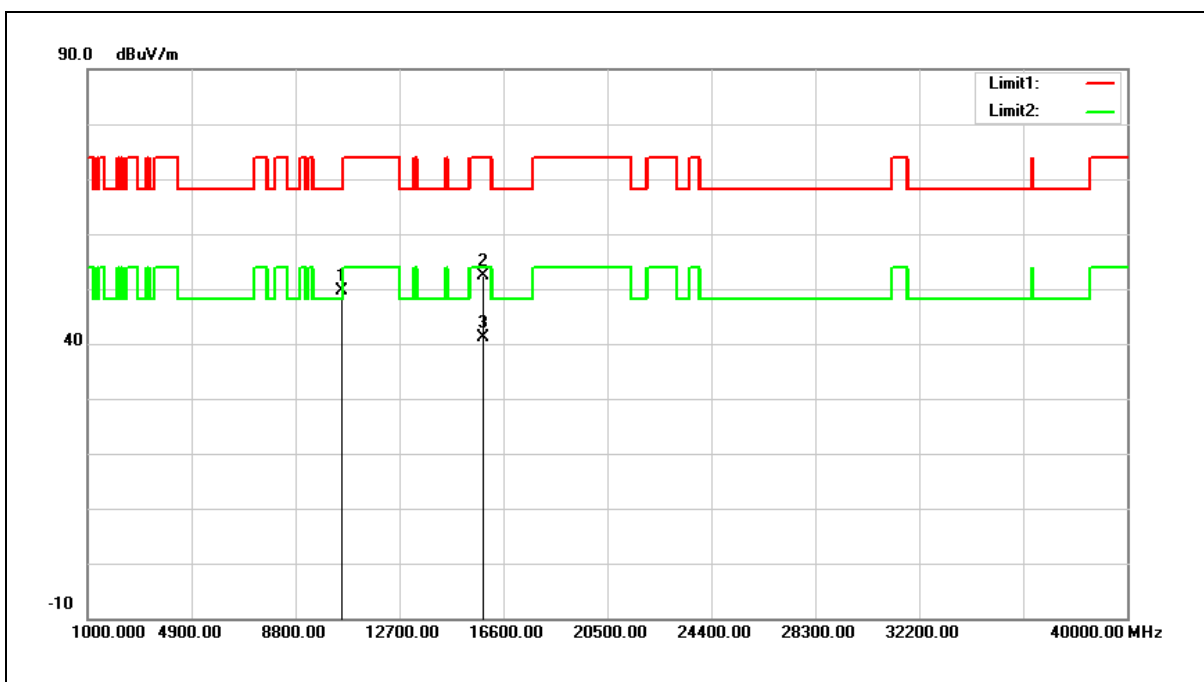


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	31.79	17.81	49.60	68.20	-18.60	peak
2	15840.000	32.33	20.00	52.33	74.00	-21.67	peak
3	15840.000	21.07	20.00	41.07	54.00	-12.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

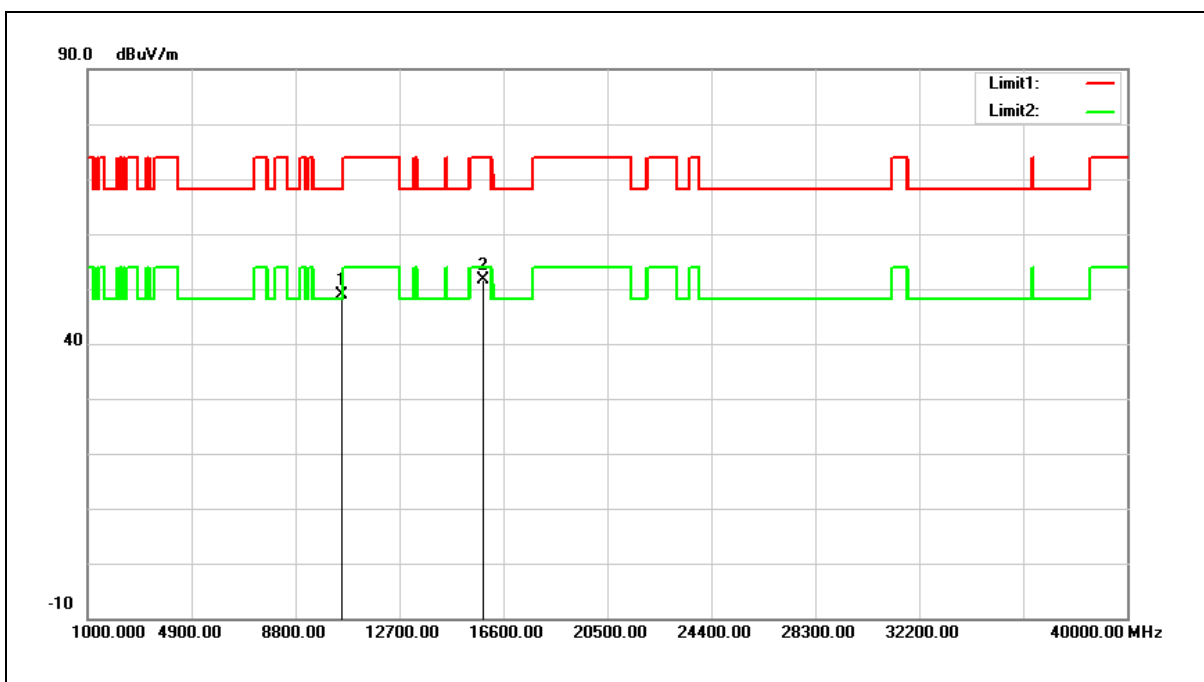


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	30.95	17.81	48.76	68.20	-19.44	peak
2	15840.000	31.56	20.00	51.56	74.00	-22.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

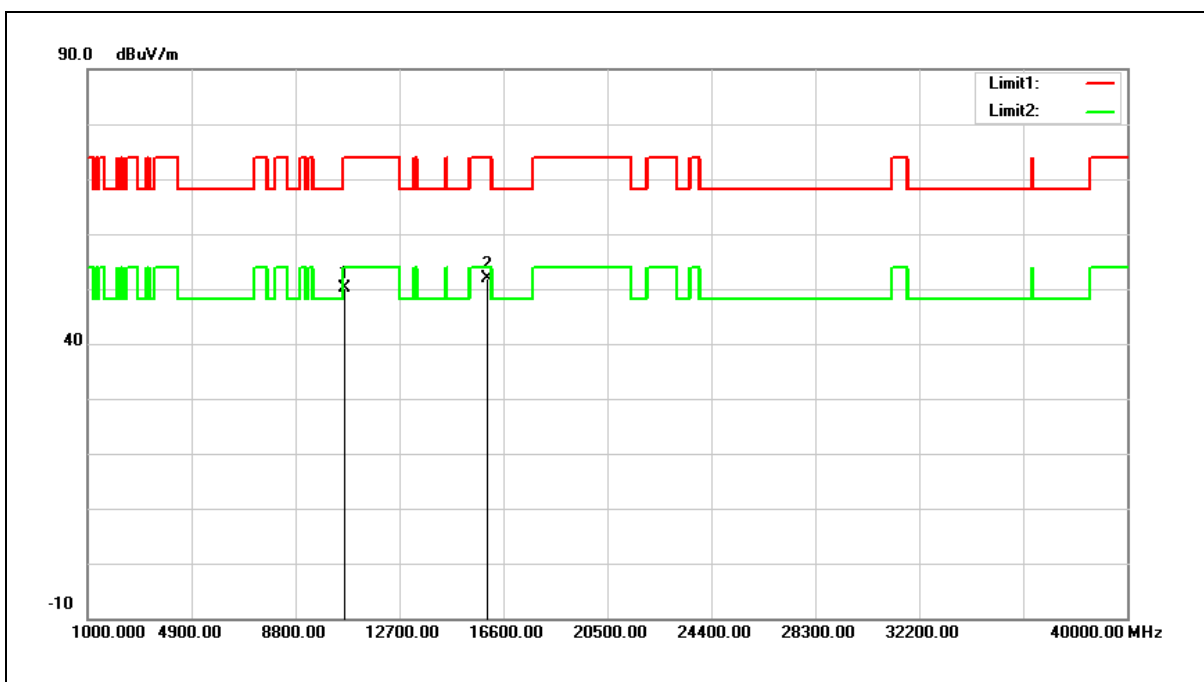


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.08	17.96	50.04	74.00	-23.96	peak
2	15960.000	32.25	19.71	51.96	74.00	-22.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3. When the peak results are less than average limit, so not need to evaluate the average.

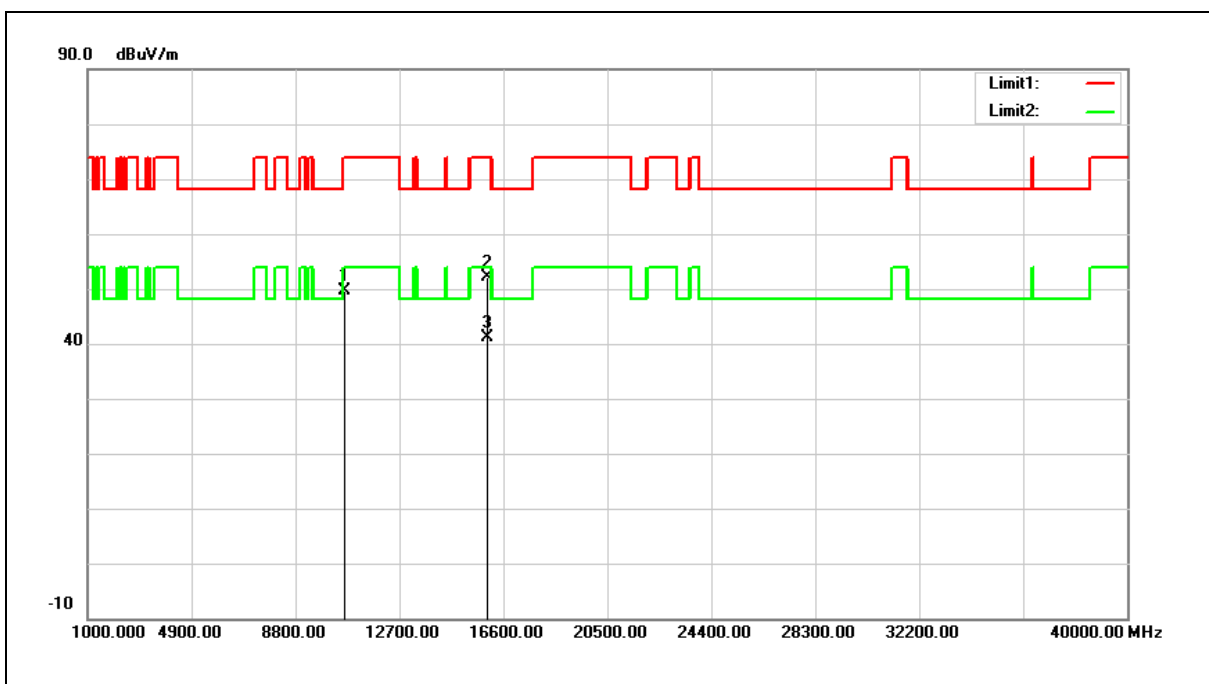

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.69	17.96	49.65	74.00	-24.35	peak
2	15960.000	32.33	19.71	52.04	74.00	-21.96	peak
3	15960.000	21.44	19.71	41.15	54.00	-12.85	AVG

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

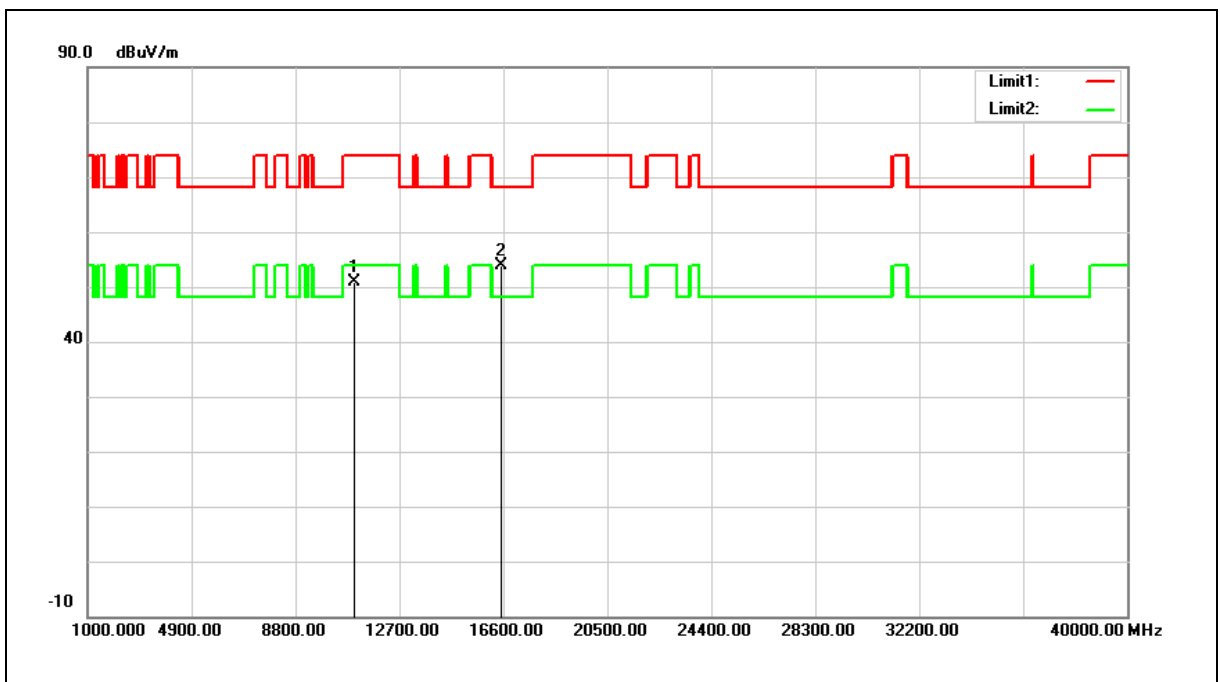


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.18	18.63	50.81	74.00	-23.19	peak
2	16500.000	32.11	21.66	53.77	68.20	-14.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

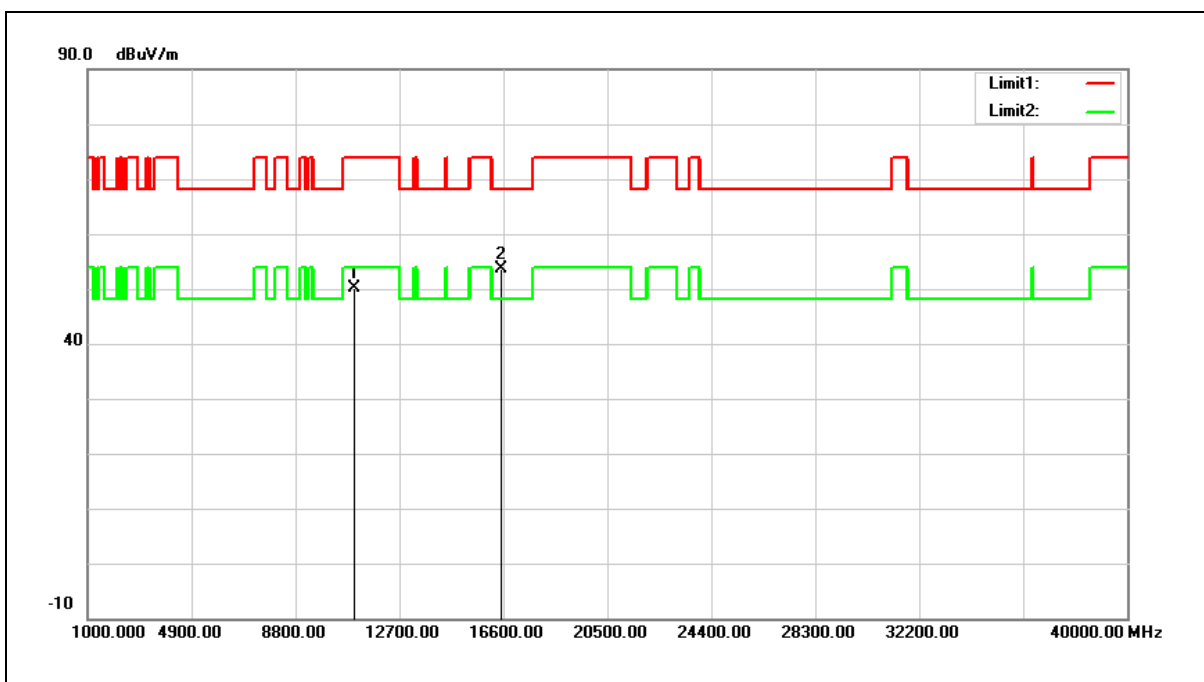


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	31.59	18.63	50.22	74.00	-23.78	peak
2	16500.000	32.02	21.66	53.68	68.20	-14.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

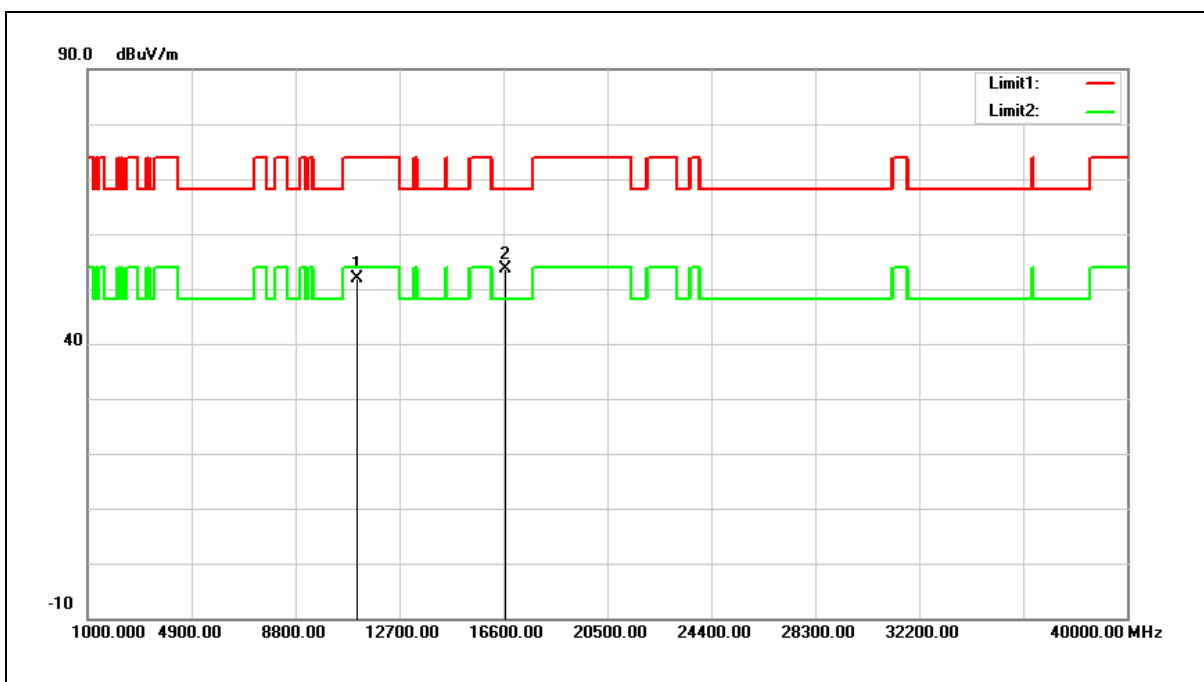


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.09	18.83	51.92	74.00	-22.08	peak
2	16680.000	30.93	22.64	53.57	68.20	-14.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

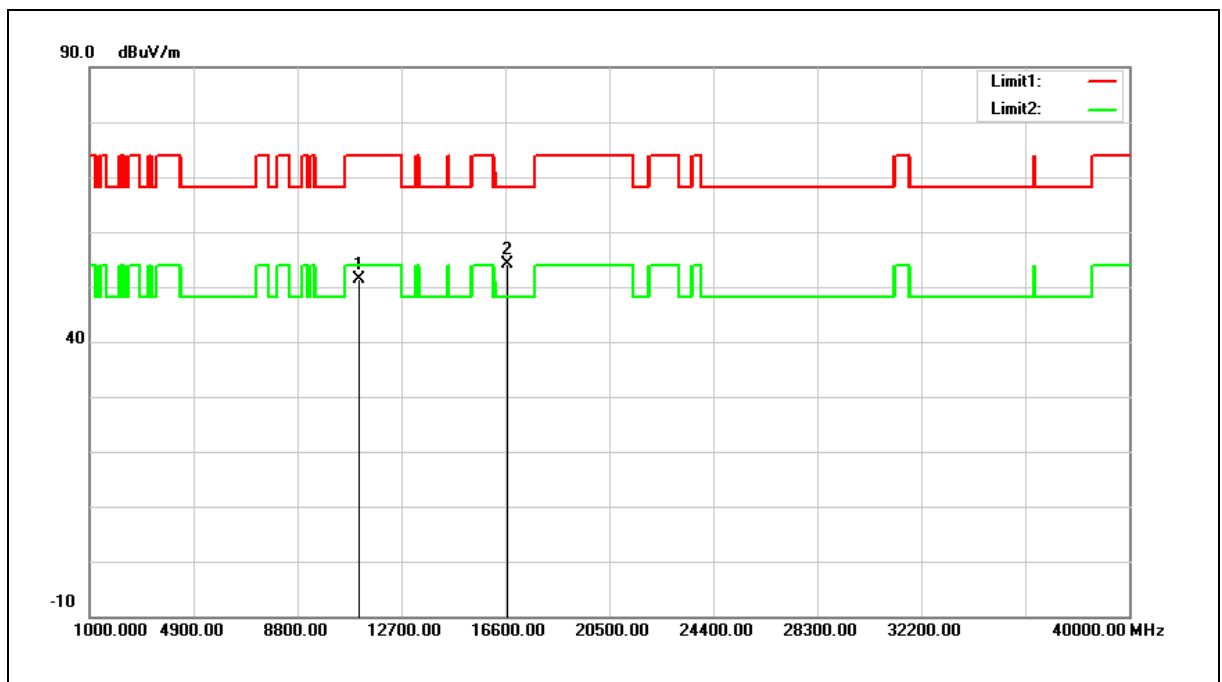


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.59	18.83	51.42	74.00	-22.58	peak
2	16680.000	31.44	22.64	54.08	68.20	-14.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

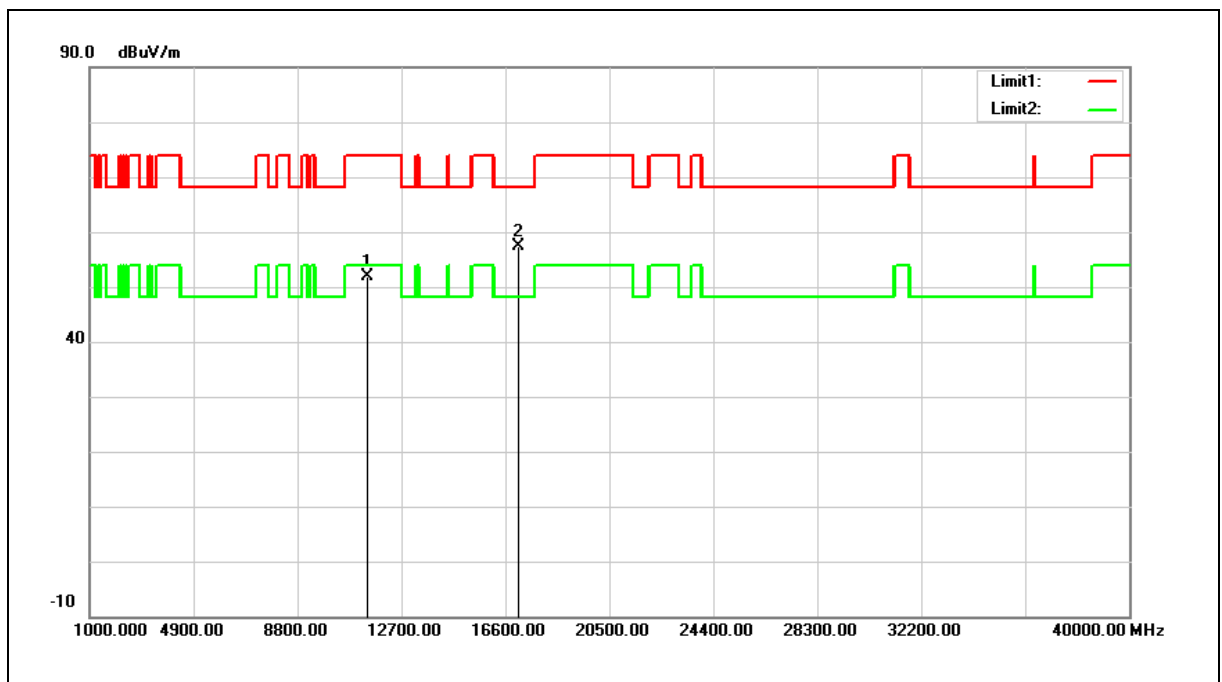


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.56	19.30	51.86	74.00	-22.14	peak
2	17100.000	32.66	24.65	57.31	68.20	-10.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

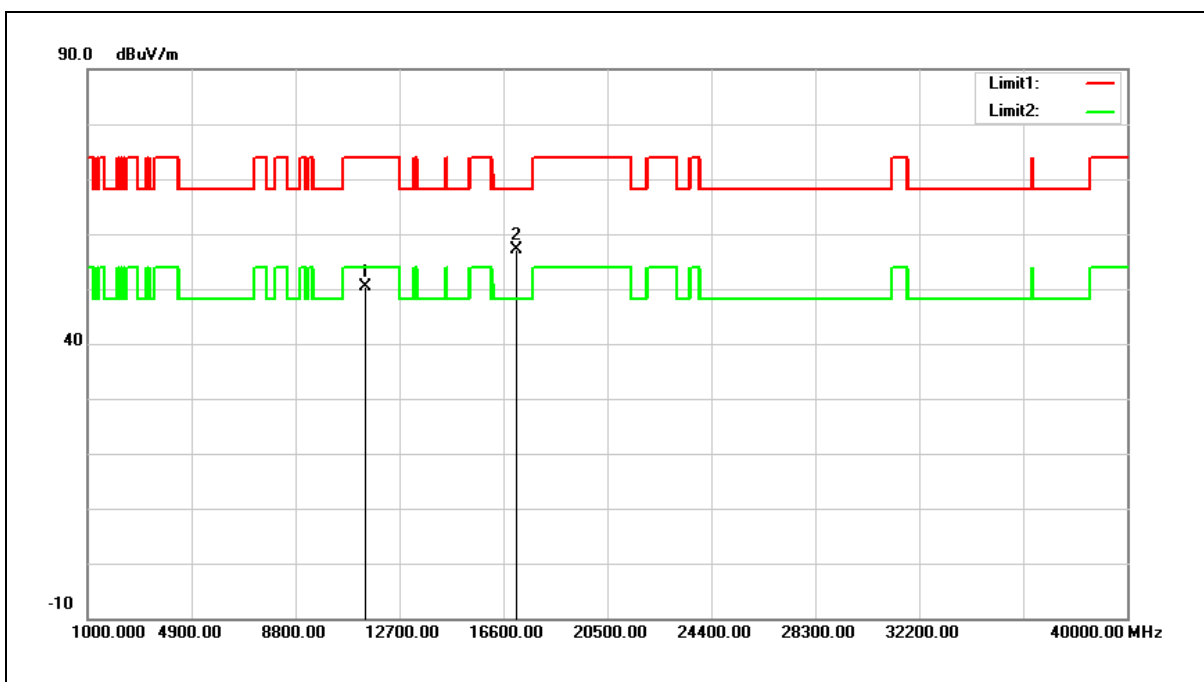


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.14	19.30	50.44	74.00	-23.56	peak
2	17100.000	32.53	24.65	57.18	68.20	-11.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

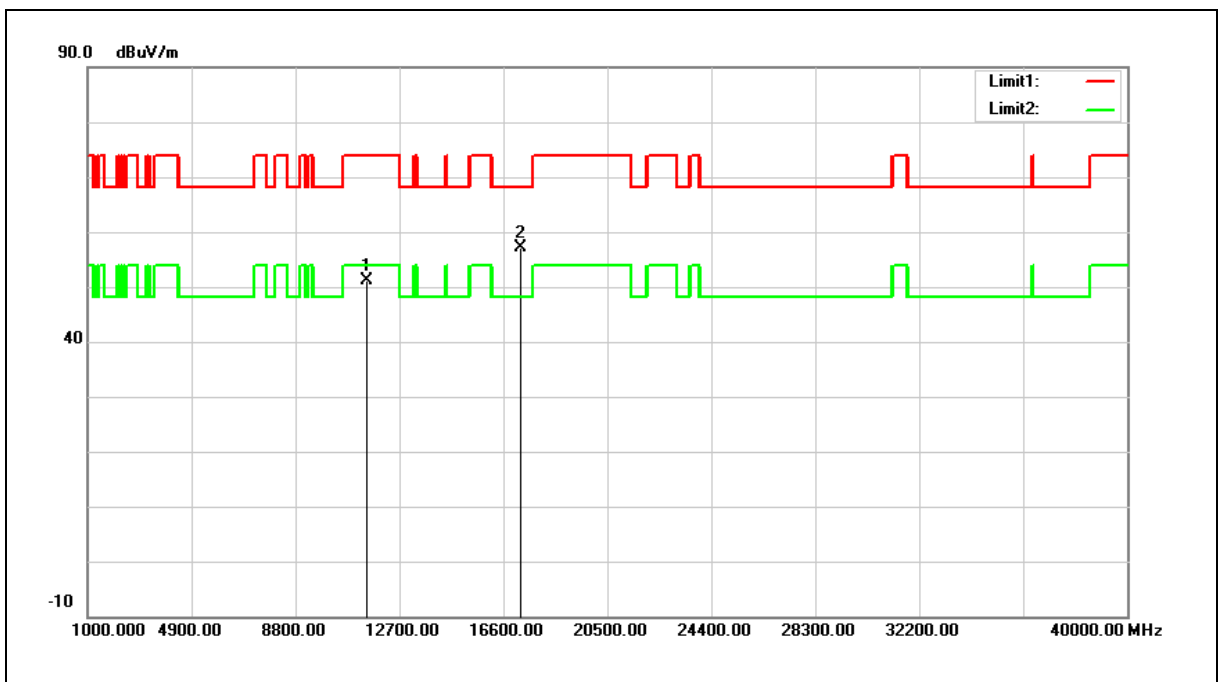


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	31.67	19.45	51.12	74.00	-22.88	peak
2	17235.000	32.18	25.01	57.19	68.20	-11.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

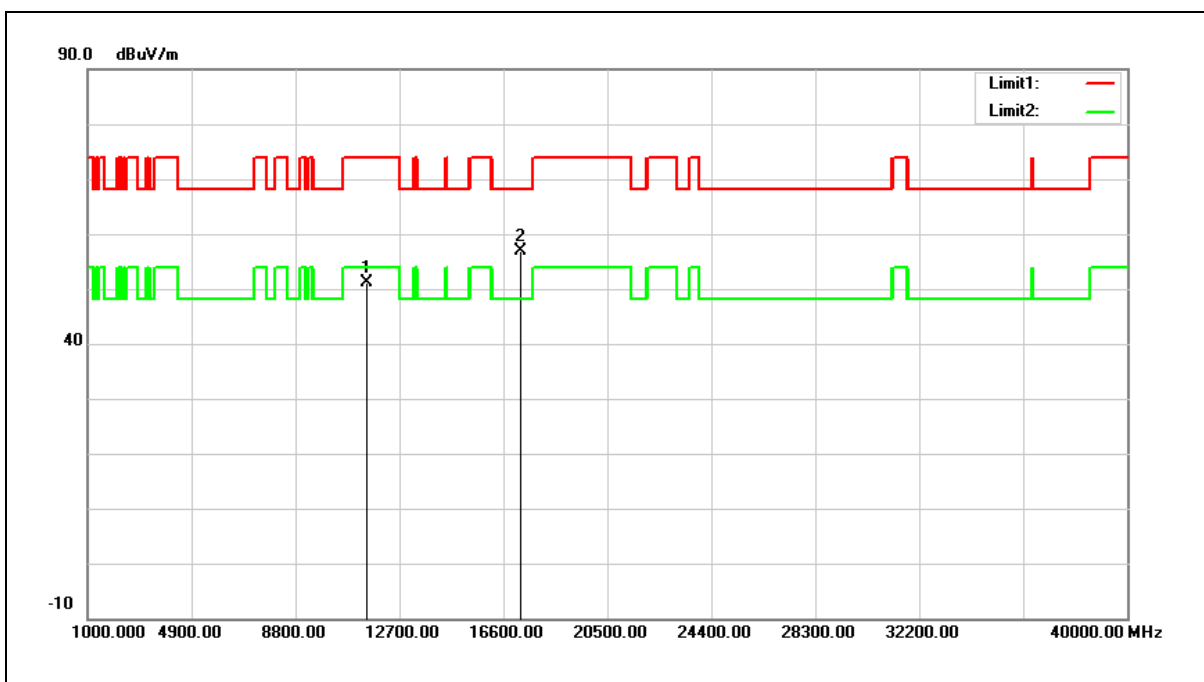


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	31.70	19.45	51.15	74.00	-22.85	peak
2	17235.000	31.76	25.01	56.77	68.20	-11.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

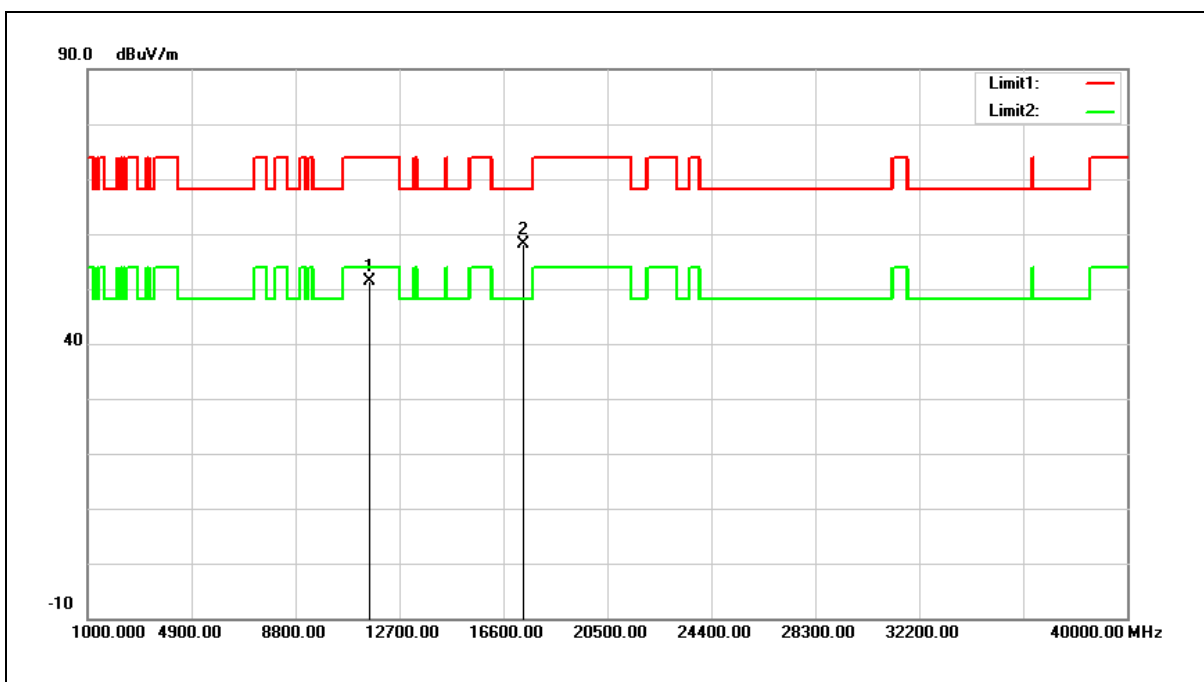


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.94	19.39	51.33	74.00	-22.67	peak
2	17355.000	32.83	25.34	58.17	68.20	-10.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

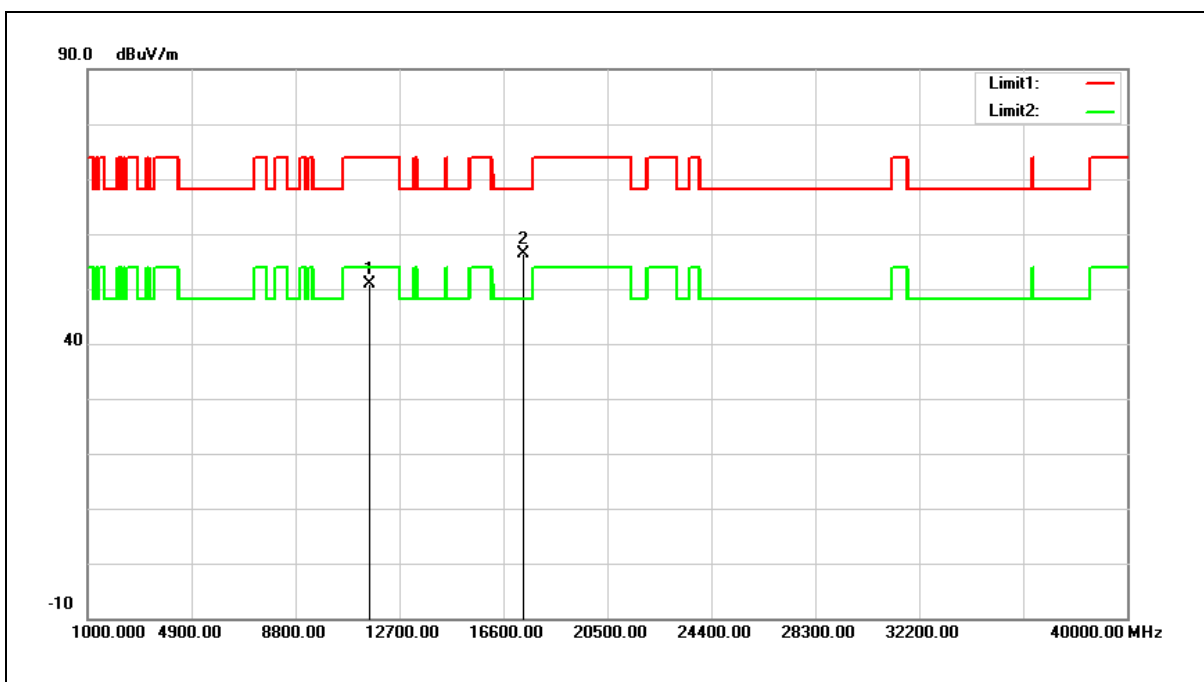


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.46	19.39	50.85	74.00	-23.15	peak
2	17355.000	30.97	25.34	56.31	68.20	-11.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

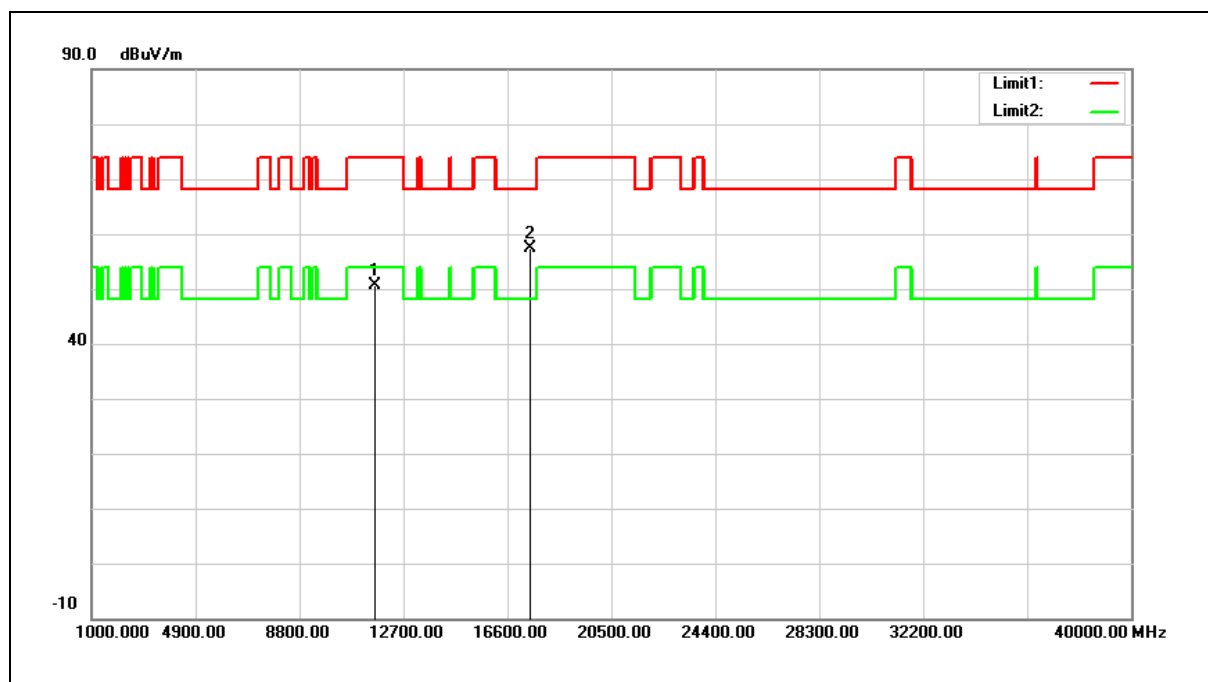


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.34	19.32	50.66	74.00	-23.34	peak
2	17475.000	31.69	25.65	57.34	68.20	-10.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

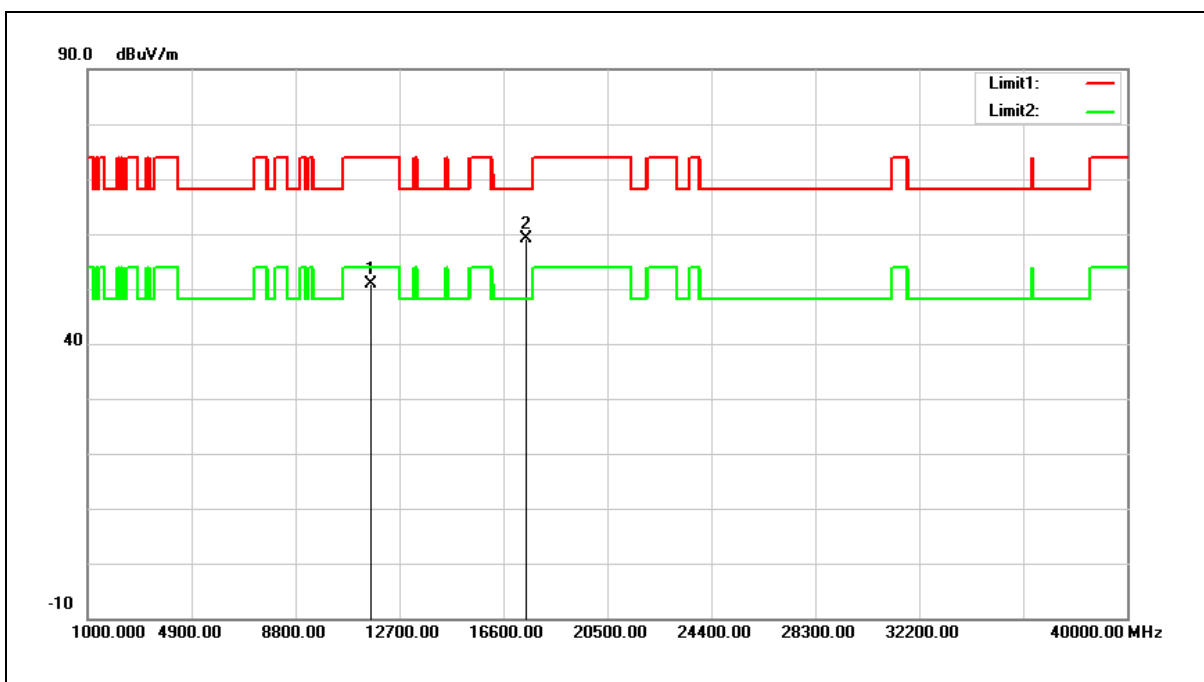


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.60	19.32	50.92	74.00	-23.08	peak
2	17475.000	33.52	25.65	59.17	68.20	-9.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

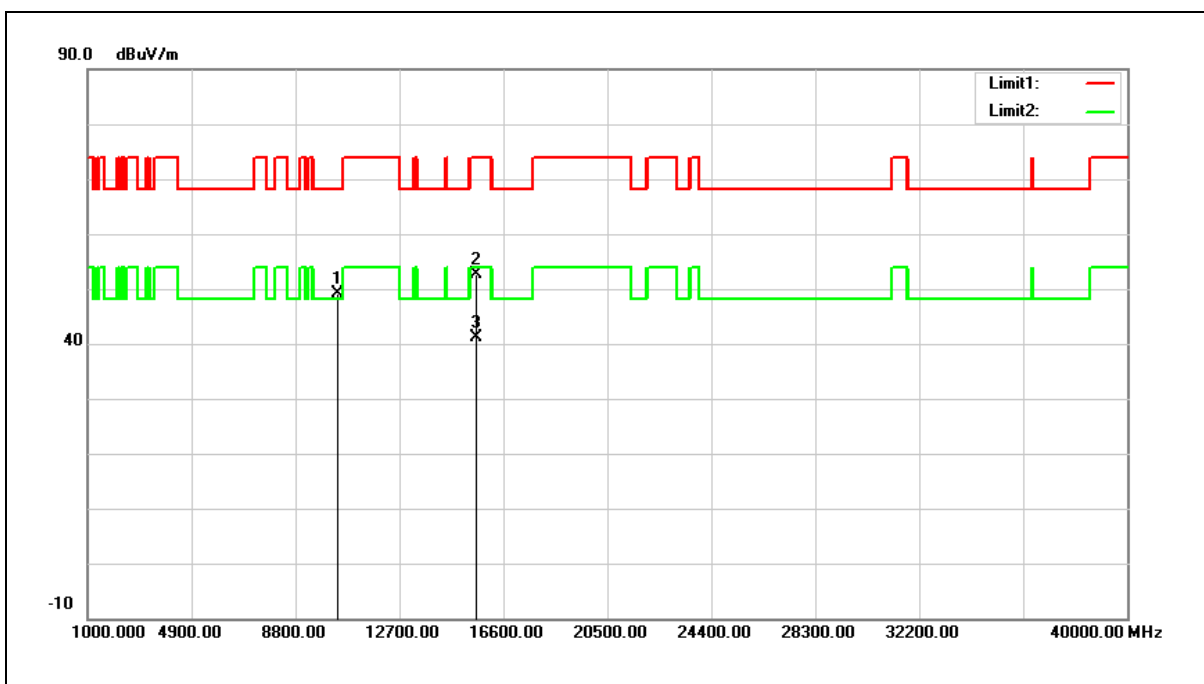


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	31.67	17.35	49.02	68.20	-19.18	peak
2	15570.000	31.96	20.68	52.64	74.00	-21.36	peak
3	15570.000	20.51	20.68	41.19	54.00	-12.81	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

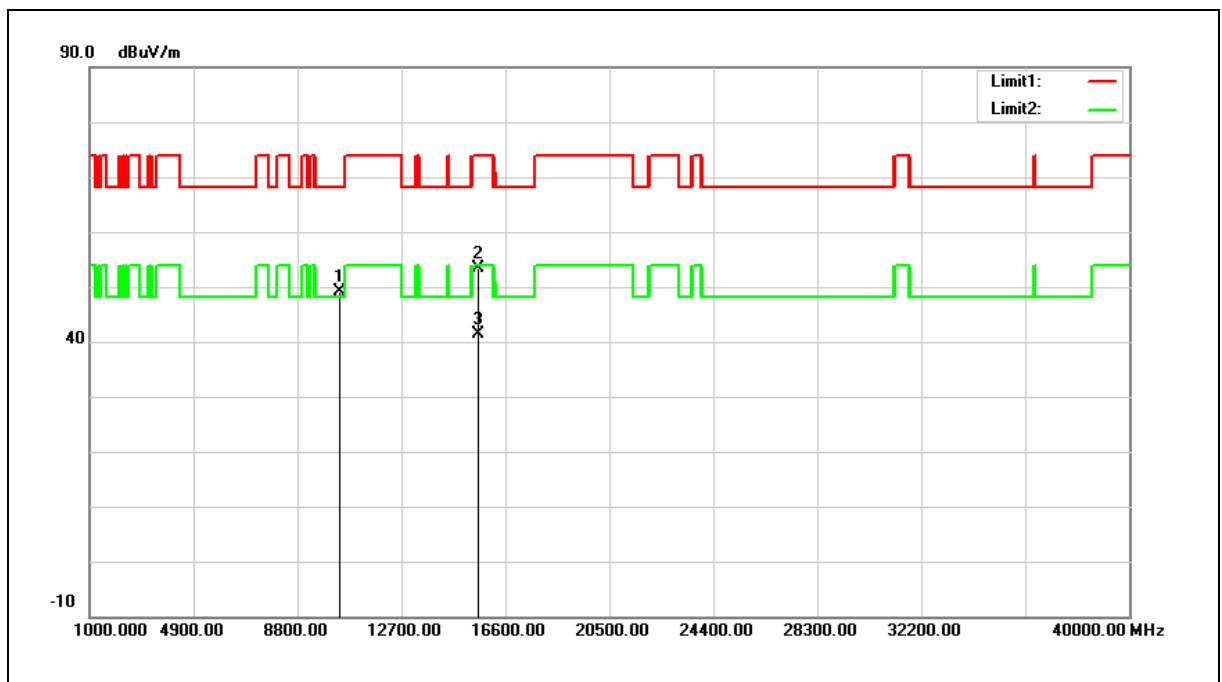


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	31.77	17.35	49.12	68.20	-19.08	peak
2	15570.000	32.72	20.68	53.40	74.00	-20.60	peak
3	15570.000	20.69	20.68	41.37	54.00	-12.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

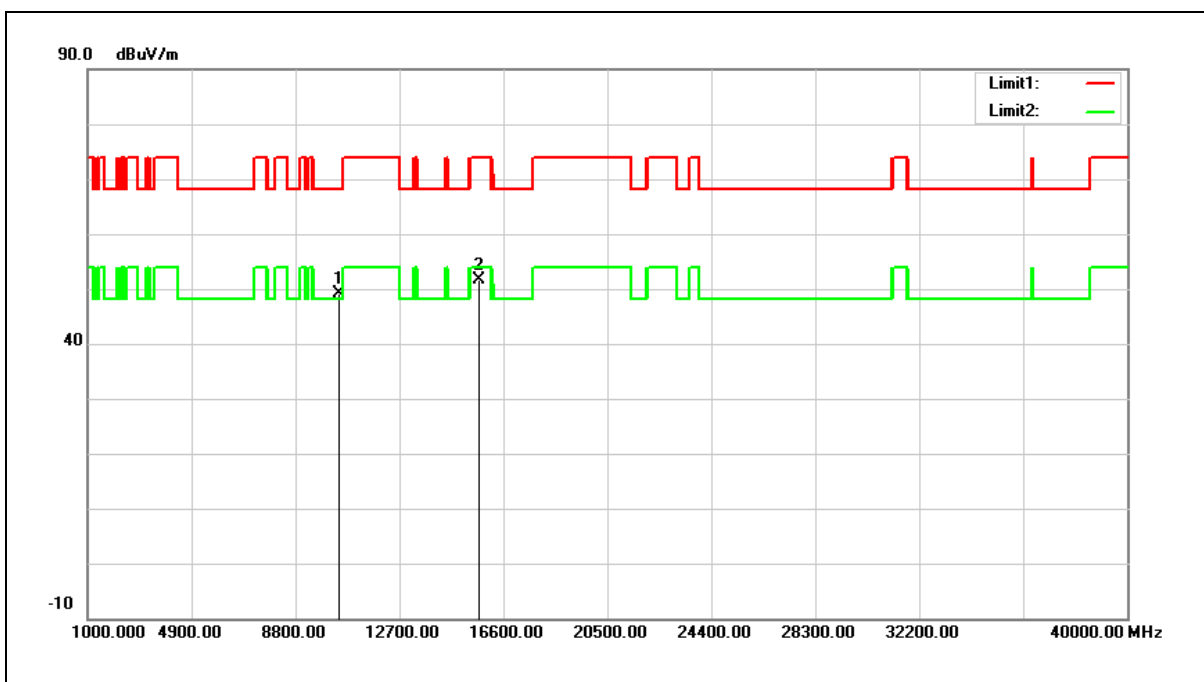


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	31.47	17.59	49.06	68.20	-19.14	peak
2	15690.000	31.37	20.37	51.74	74.00	-22.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

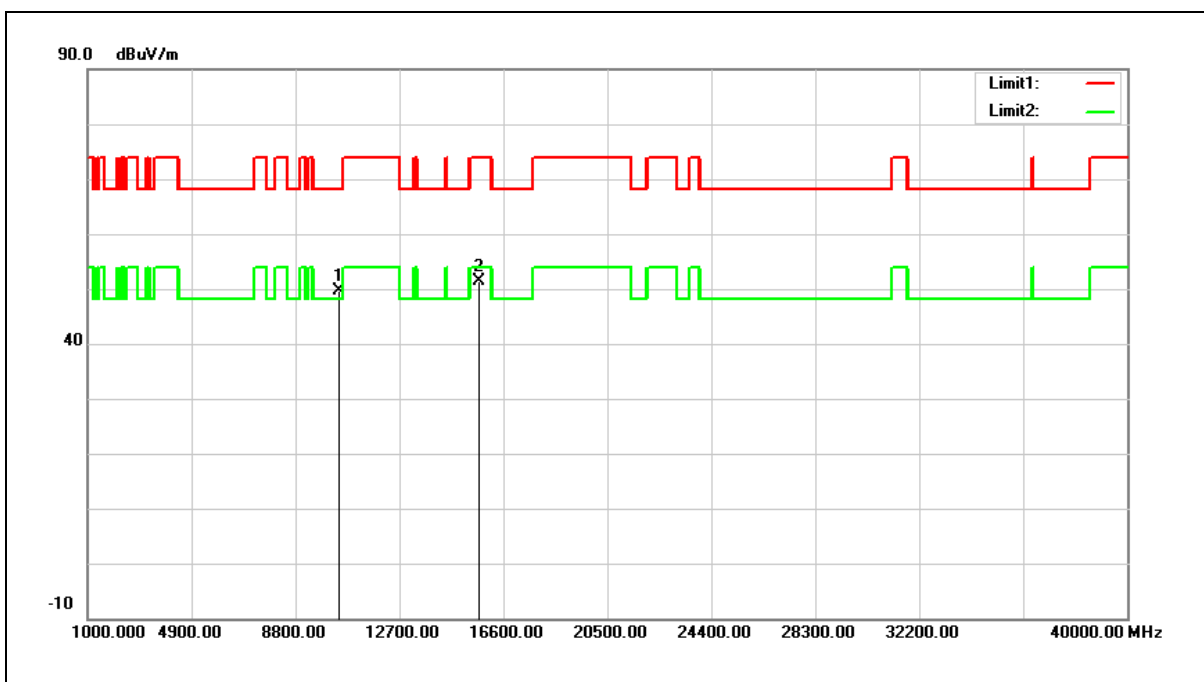


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	31.93	17.59	49.52	68.20	-18.68	peak
2	15690.000	30.95	20.37	51.32	74.00	-22.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

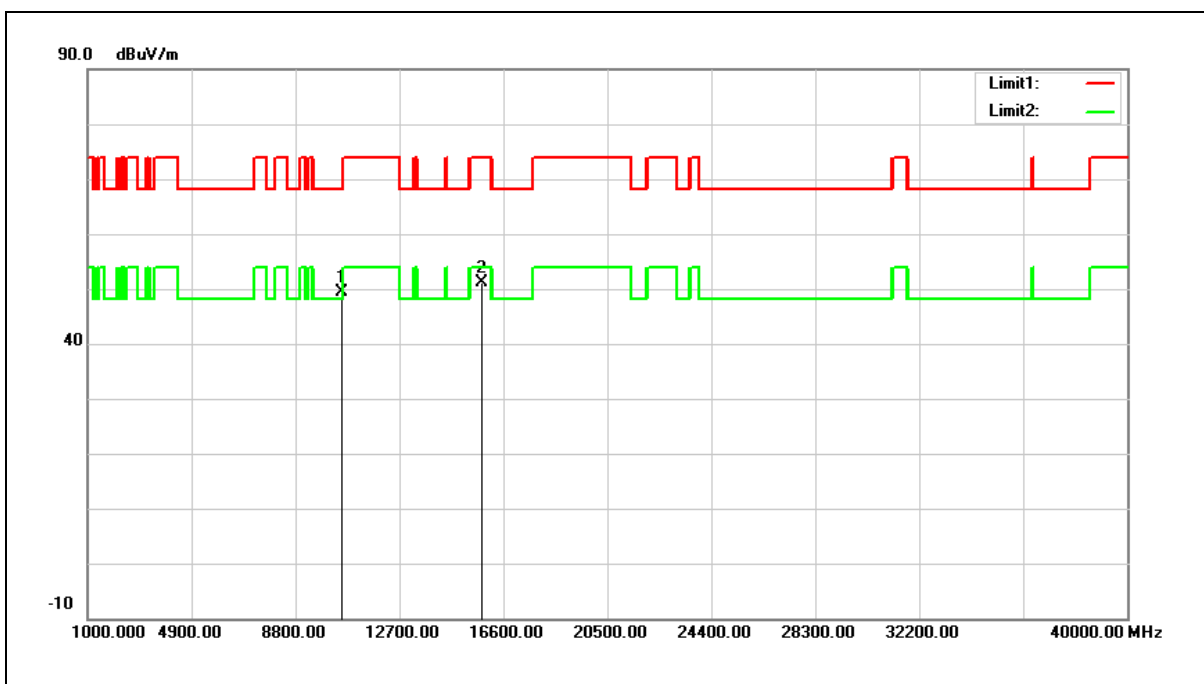


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	31.72	17.78	49.50	68.20	-18.70	peak
2	15810.000	31.07	20.08	51.15	74.00	-22.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

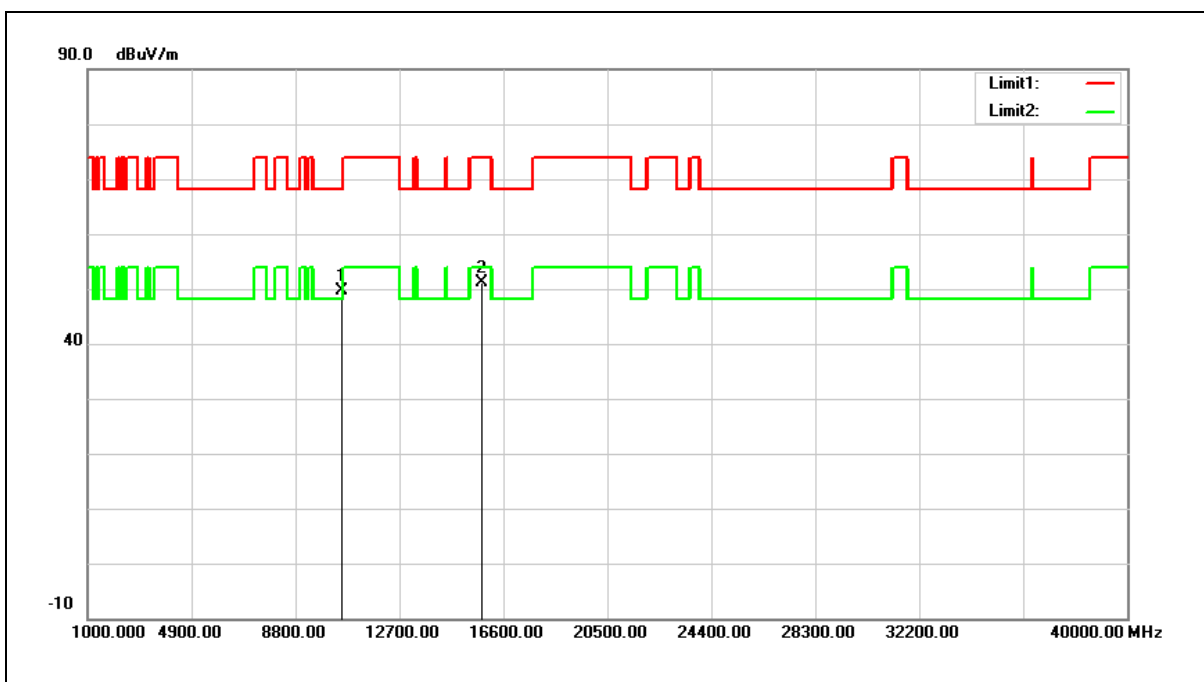


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	31.73	17.78	49.51	68.20	-18.69	peak
2	15810.000	31.02	20.08	51.10	74.00	-22.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

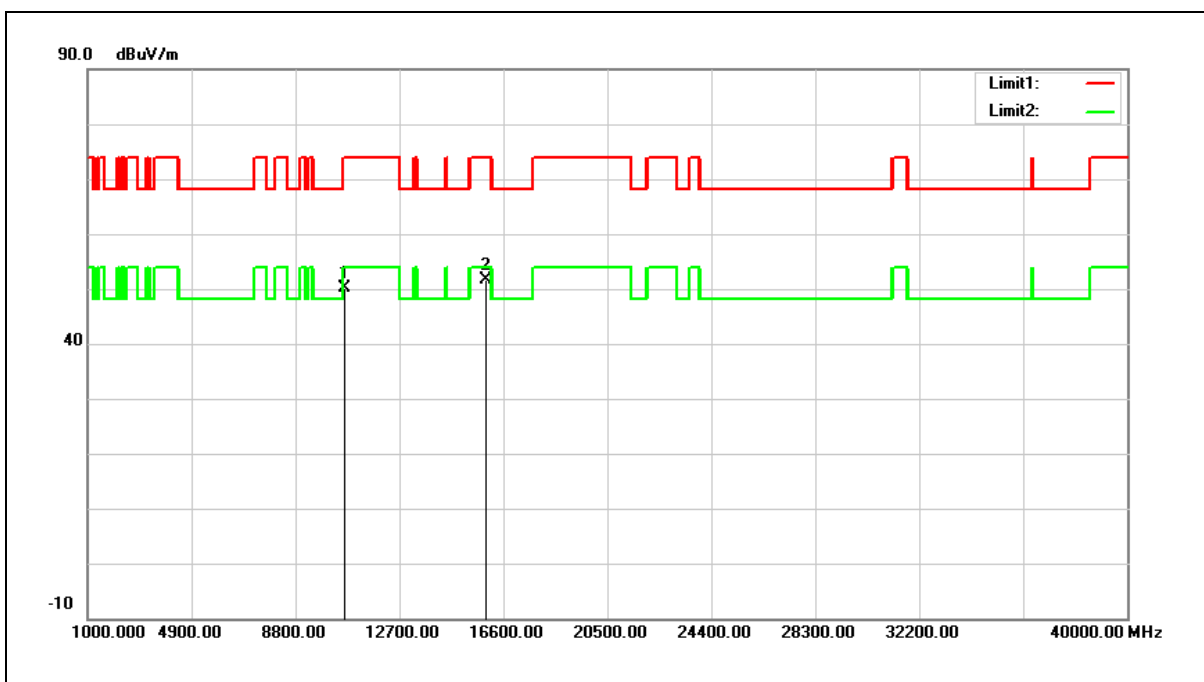


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	32.21	17.92	50.13	74.00	-23.87	peak
2	15930.000	31.96	19.77	51.73	74.00	-22.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

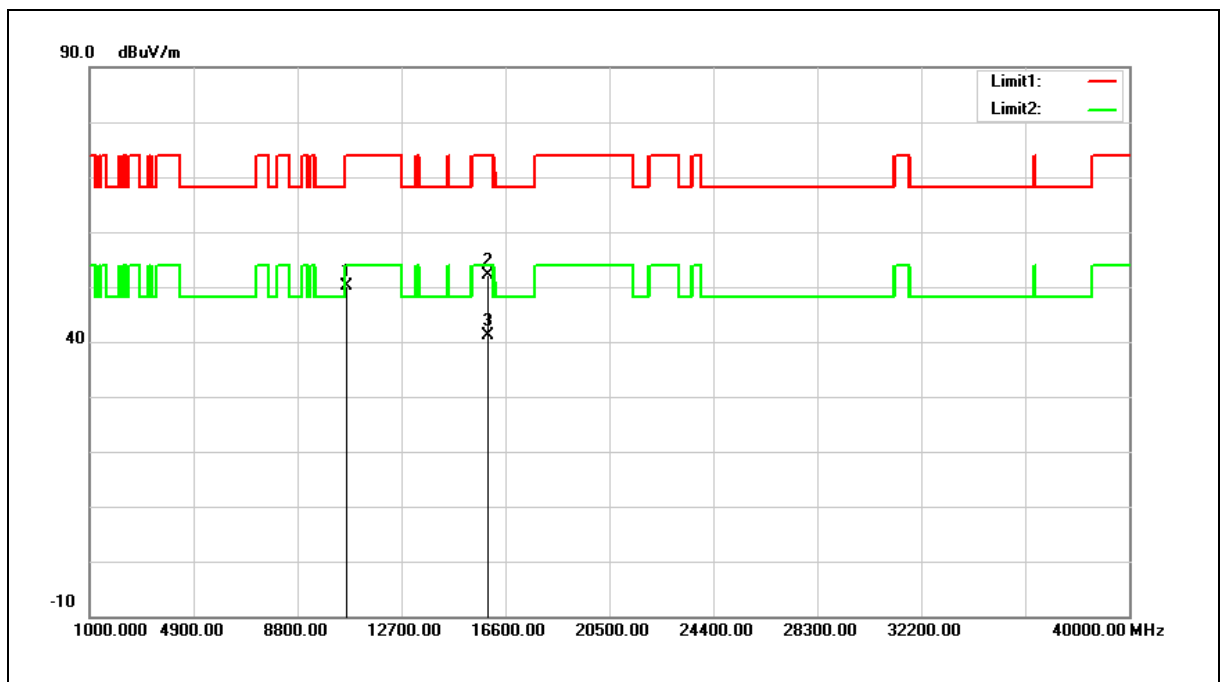


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	32.23	17.92	50.15	74.00	-23.85	peak
2	15930.000	32.36	19.77	52.13	74.00	-21.87	peak
3	15930.000	21.48	19.77	41.25	54.00	-12.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

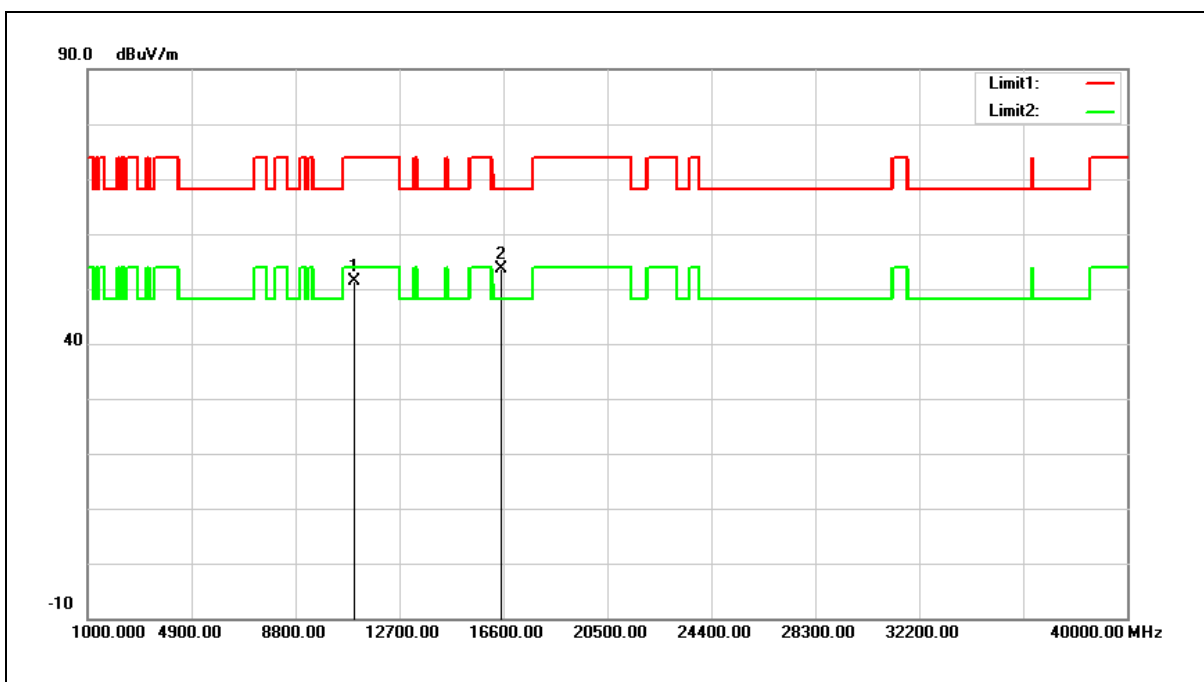


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	32.63	18.66	51.29	74.00	-22.71	peak
2	16530.000	31.90	21.82	53.72	68.20	-14.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

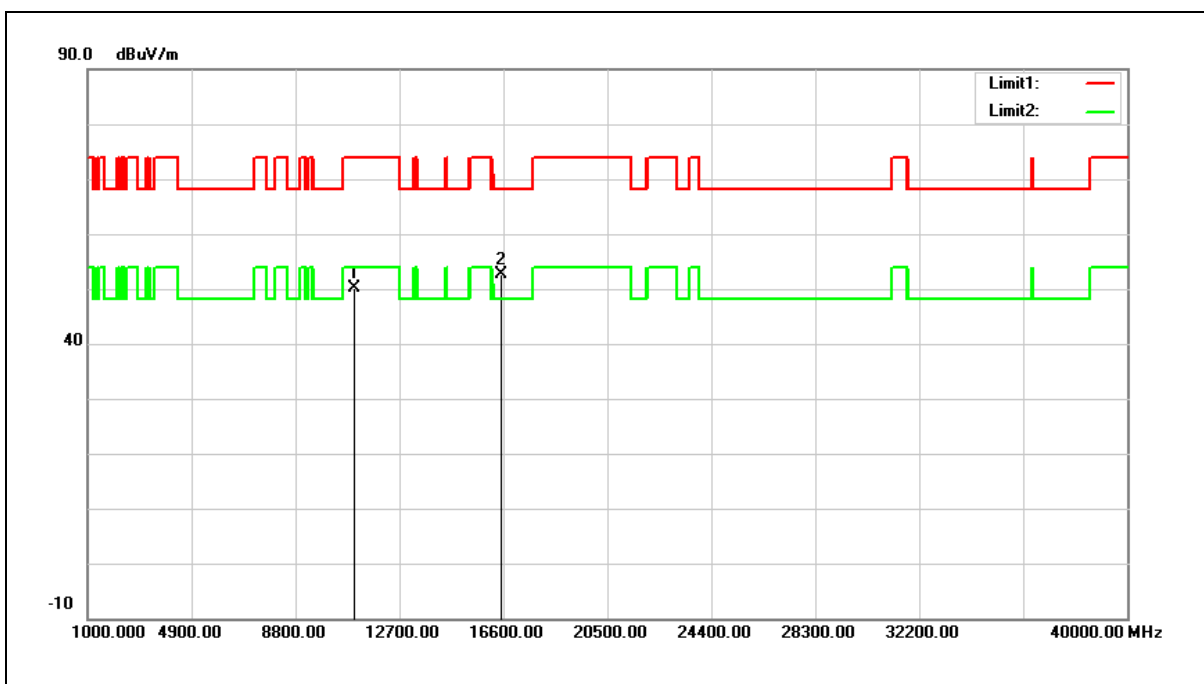


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	31.50	18.66	50.16	74.00	-23.84	peak
2	16530.000	30.77	21.82	52.59	68.20	-15.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

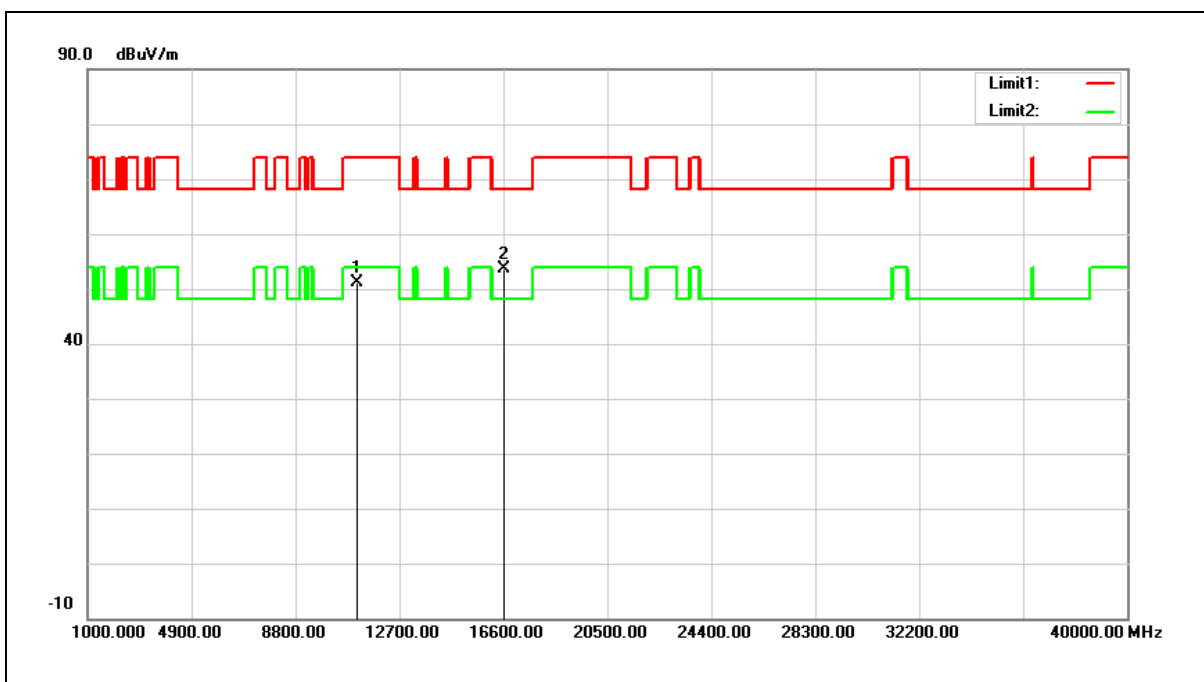


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	32.31	18.80	51.11	74.00	-22.89	peak
2	16650.000	31.04	22.47	53.51	68.20	-14.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

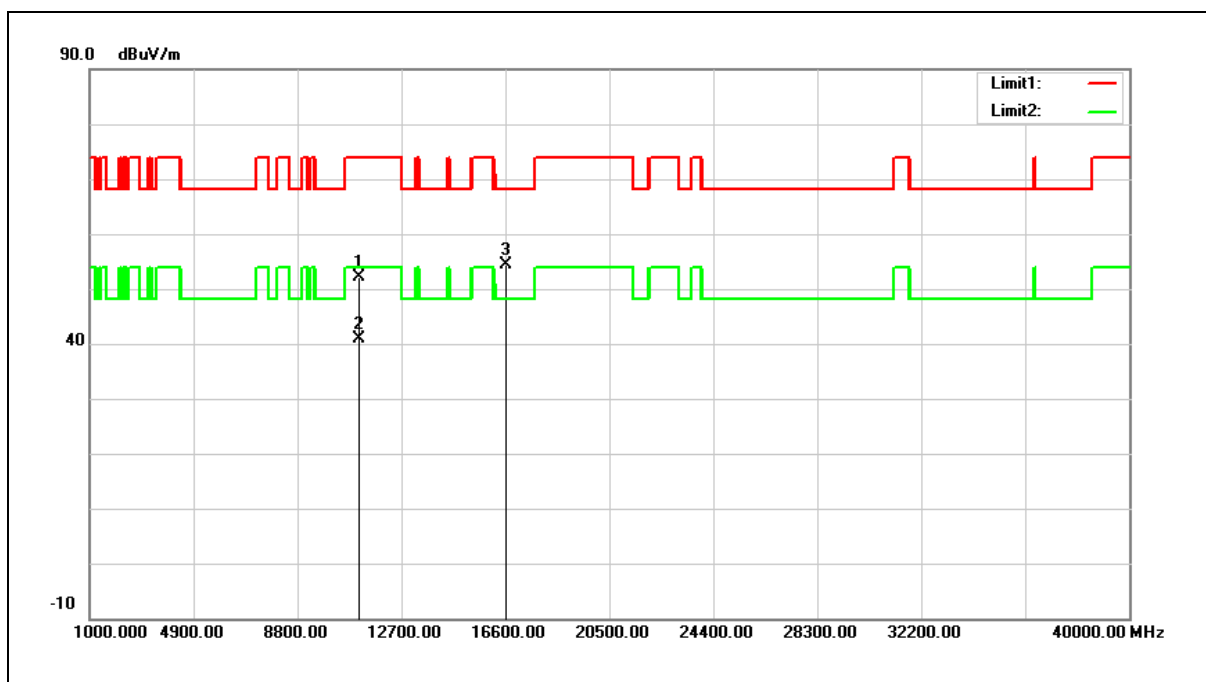


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.36	18.80	52.16	74.00	-21.84	peak
2	11100.000	22.02	18.80	40.82	54.00	-13.18	AVG
3	16650.000	31.79	22.47	54.26	68.20	-13.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

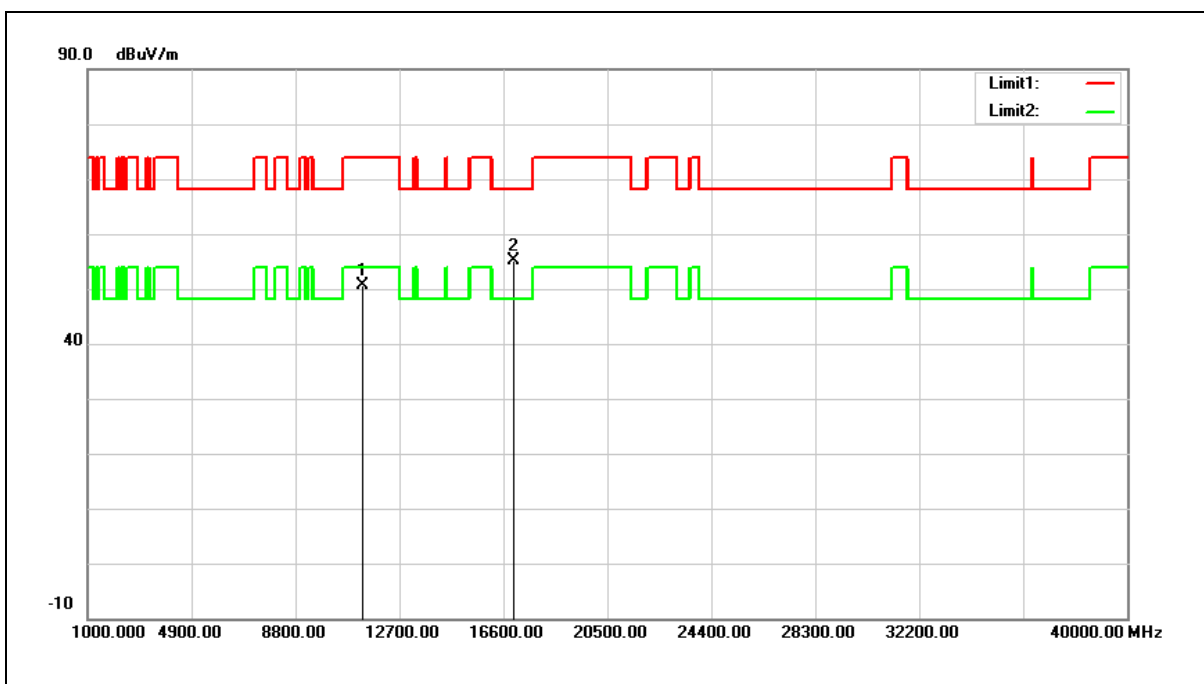


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	31.39	19.20	50.59	74.00	-23.41	peak
2	17010.000	30.60	24.41	55.01	68.20	-13.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

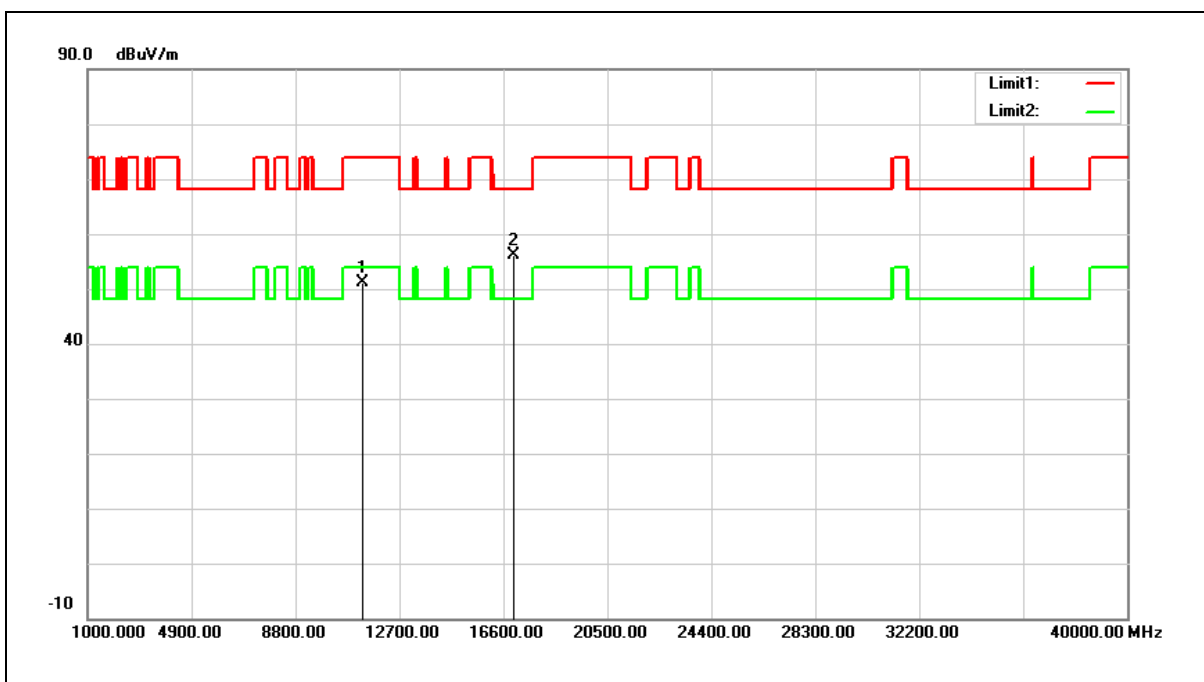


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.04	19.20	51.24	74.00	-22.76	peak
2	17010.000	31.60	24.41	56.01	68.20	-12.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

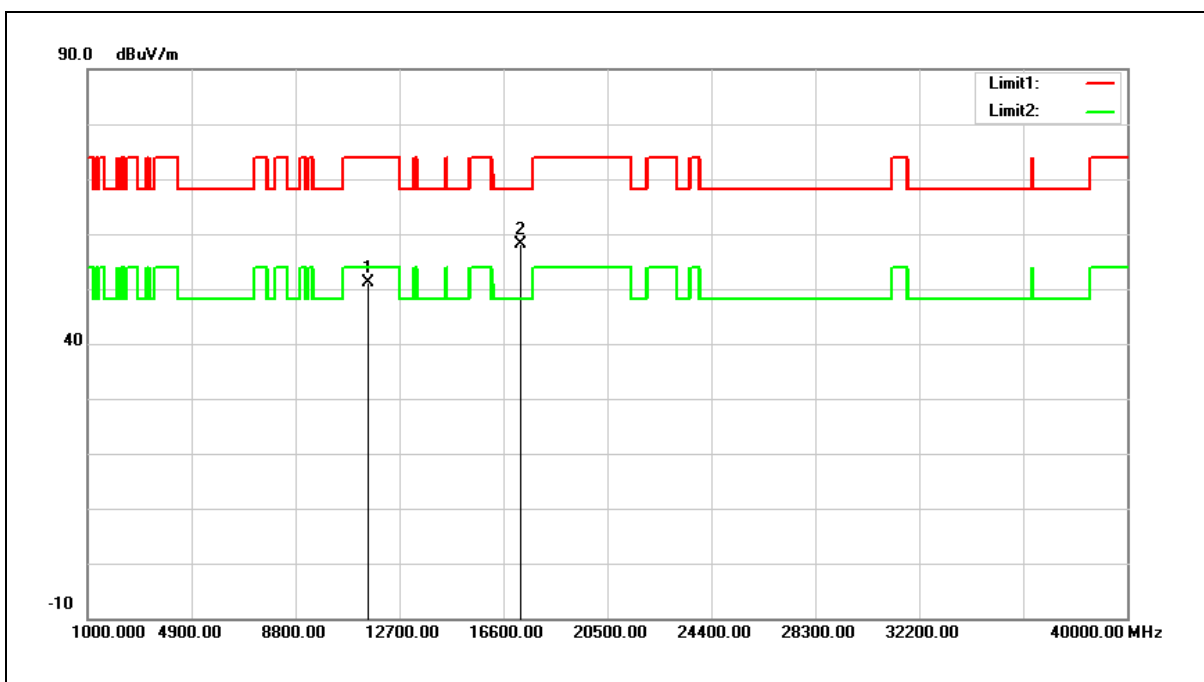


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	31.79	19.46	51.25	74.00	-22.75	peak
2	17265.000	33.11	25.09	58.20	68.20	-10.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

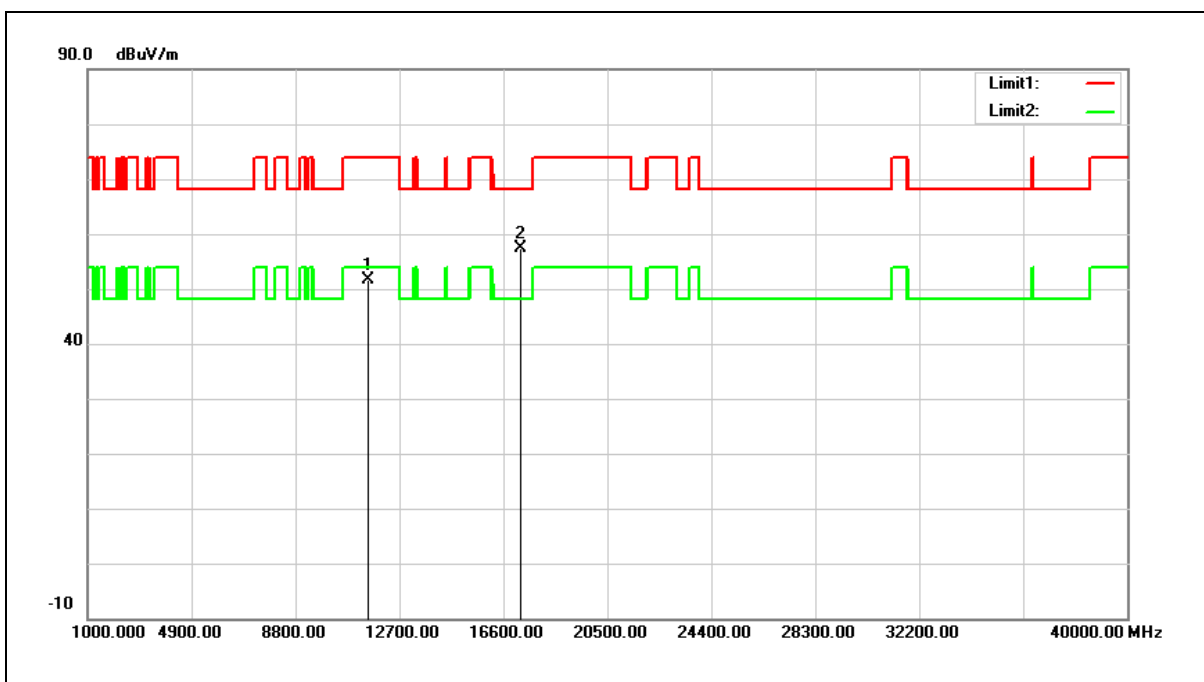


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	32.27	19.46	51.73	74.00	-22.27	peak
2	17265.000	32.23	25.09	57.32	68.20	-10.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

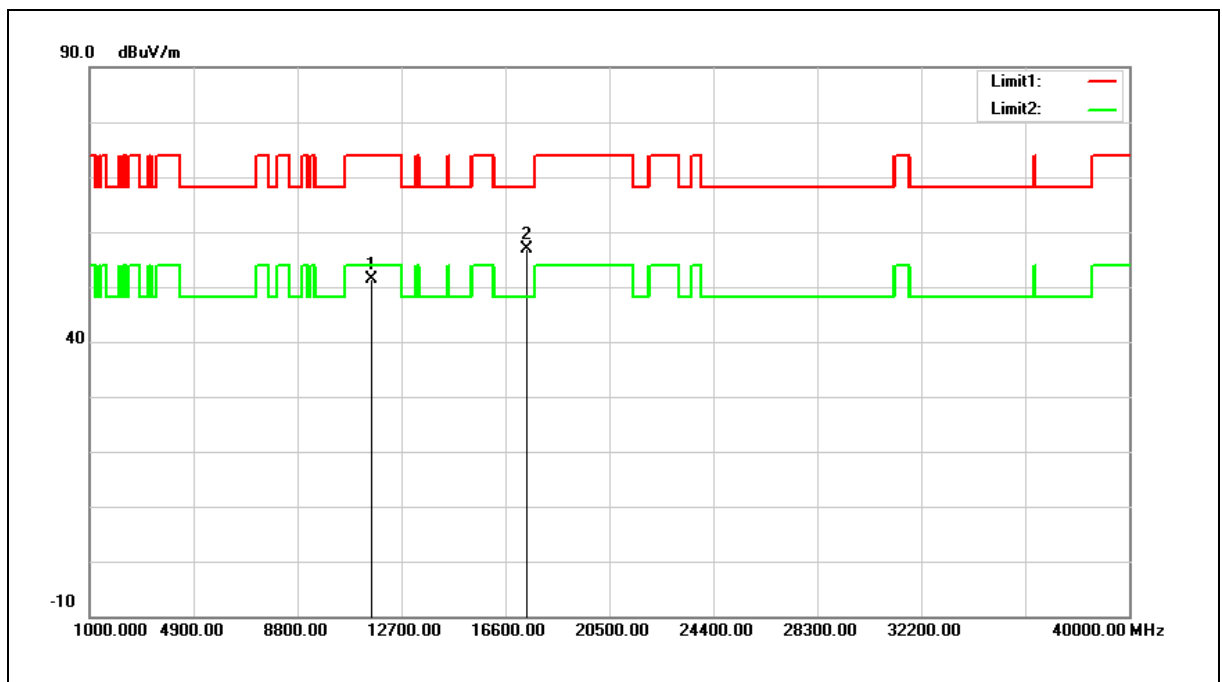


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	32.02	19.38	51.40	74.00	-22.60	peak
2	17385.000	31.48	25.41	56.89	68.20	-11.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

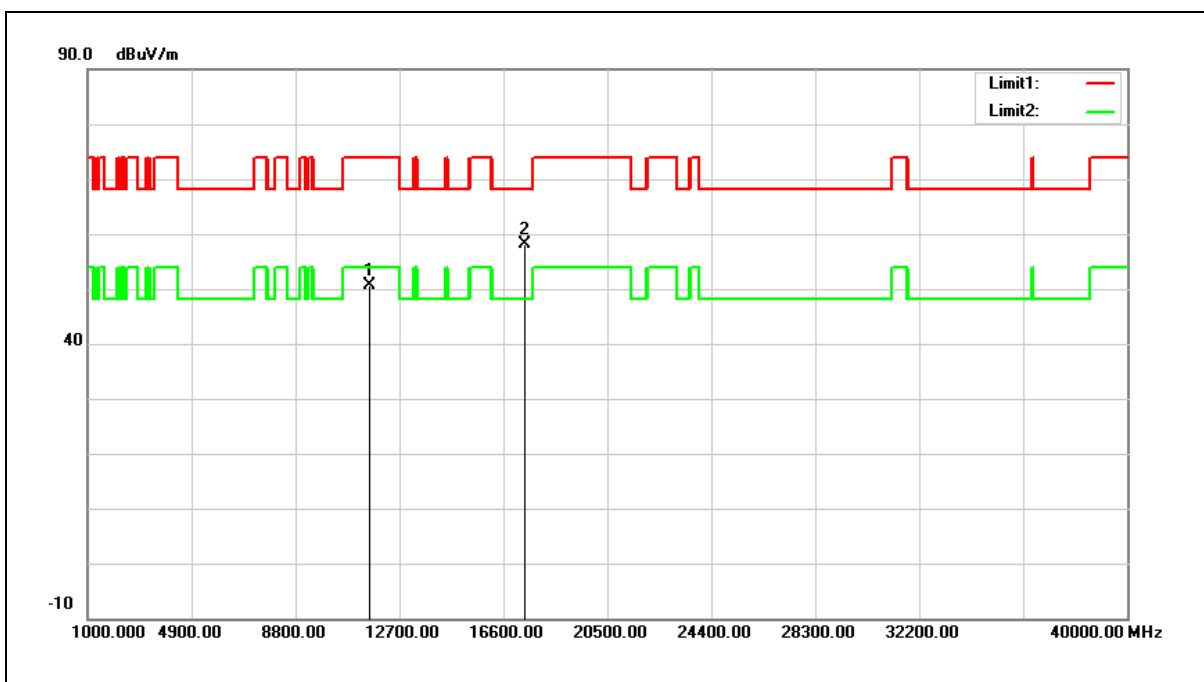


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	31.16	19.38	50.54	74.00	-23.46	peak
2	17385.000	32.71	25.41	58.12	68.20	-10.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

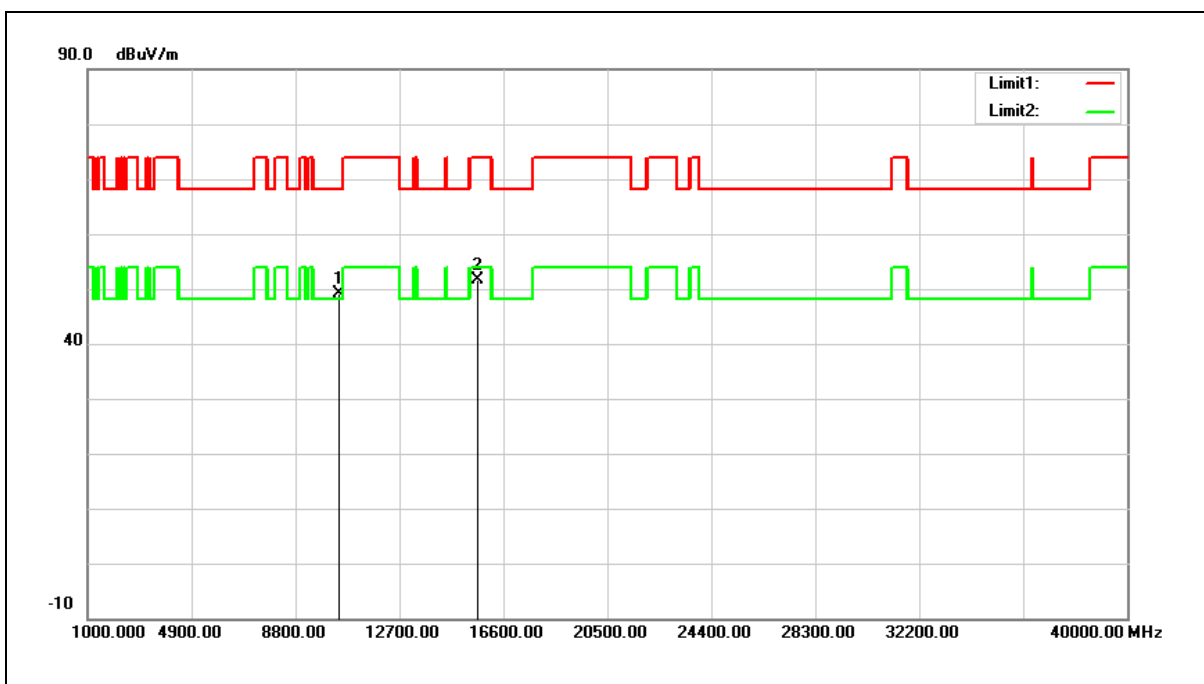


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	31.75	17.46	49.21	68.20	-18.99	peak
2	15630.000	31.18	20.53	51.71	74.00	-22.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

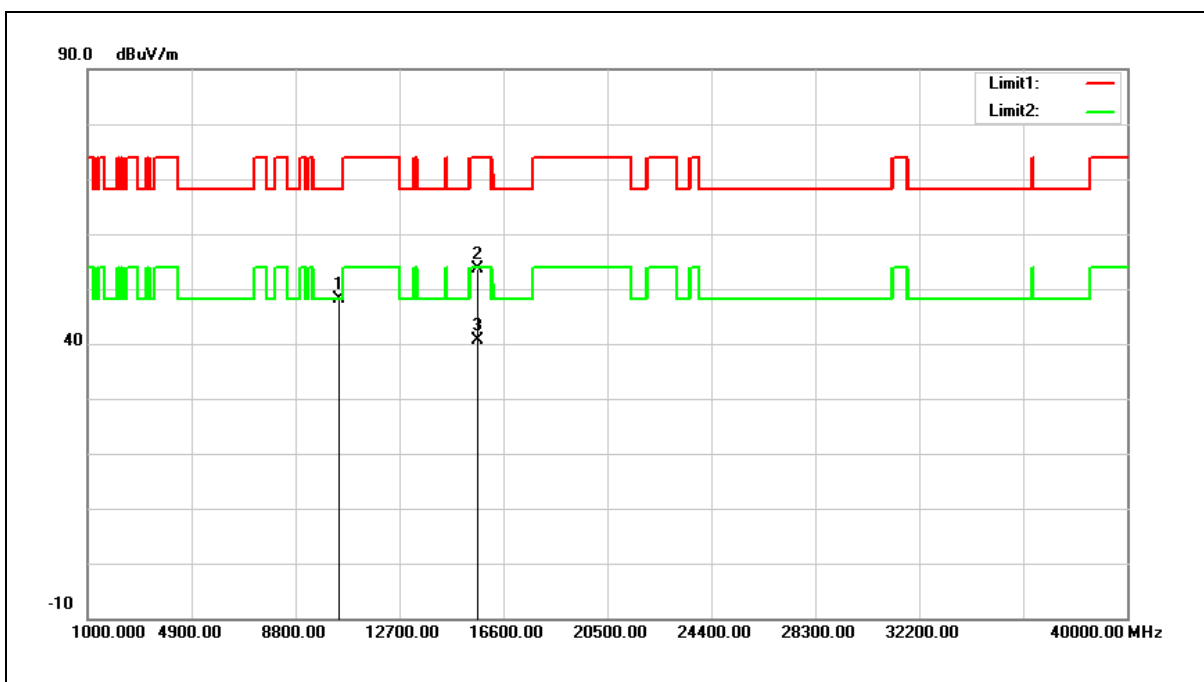


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	30.57	17.46	48.03	68.20	-20.17	peak
2	15630.000	33.06	20.53	53.59	74.00	-20.41	peak
3	15630.000	20.05	20.53	40.58	54.00	-13.42	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

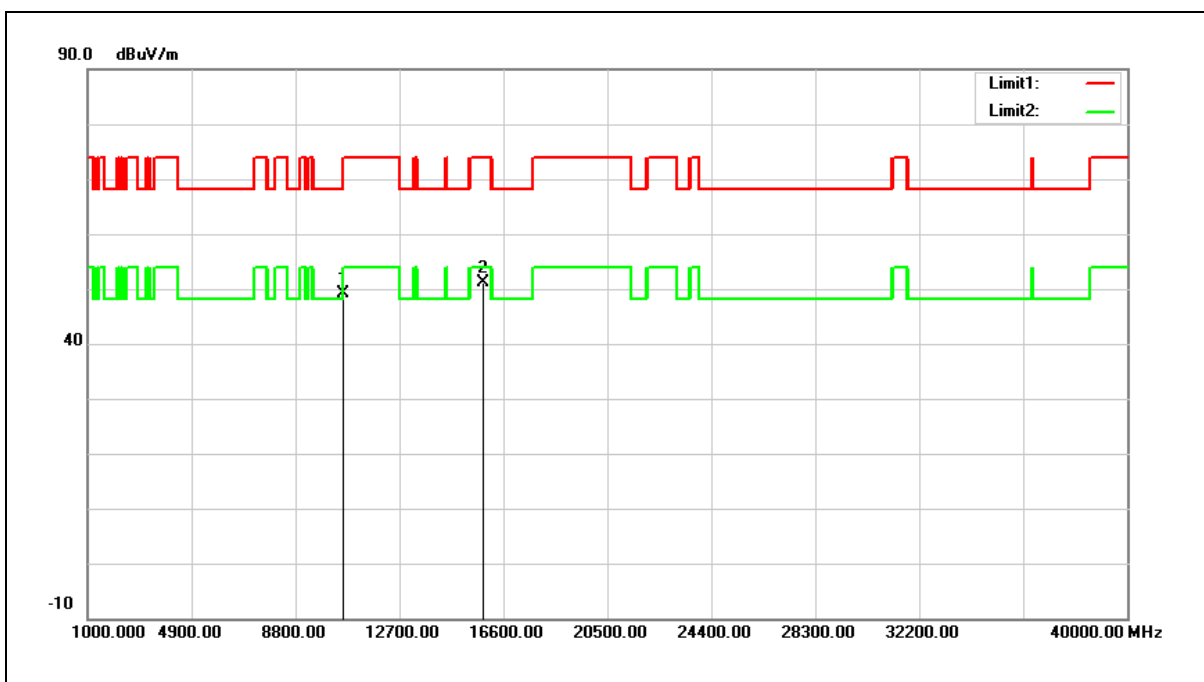


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	31.33	17.85	49.18	68.20	-19.02	peak
2	15870.000	31.31	19.93	51.24	74.00	-22.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

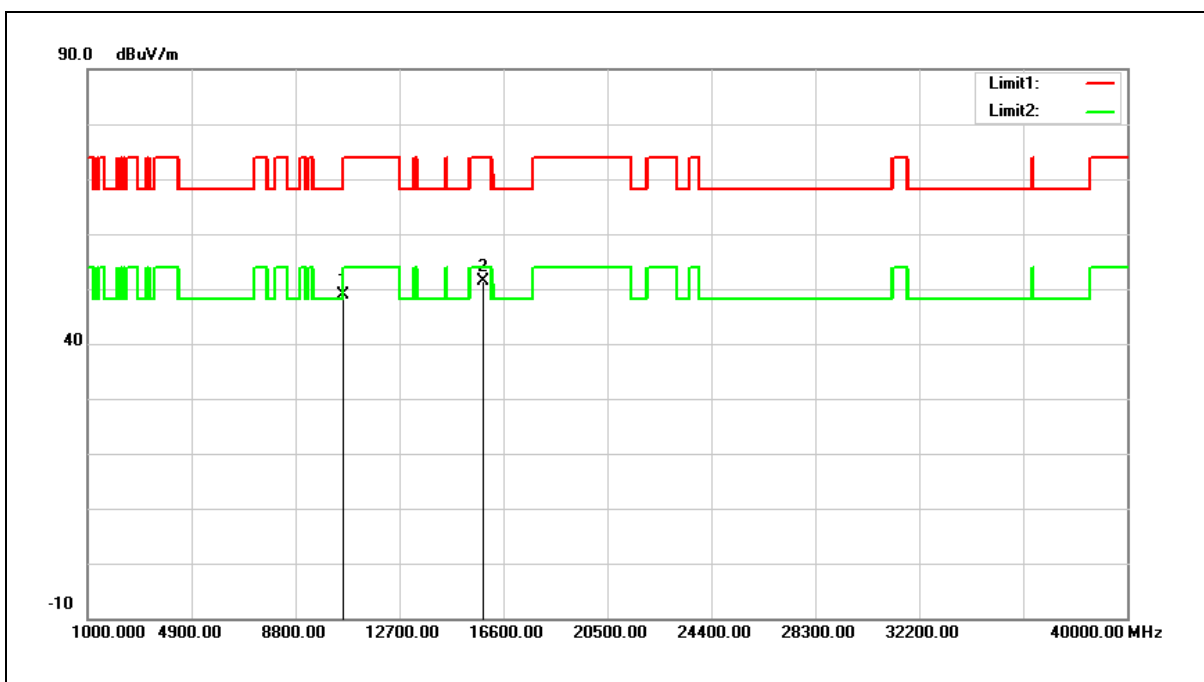


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	31.04	17.85	48.89	68.20	-19.31	peak
2	15870.000	31.52	19.93	51.45	74.00	-22.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

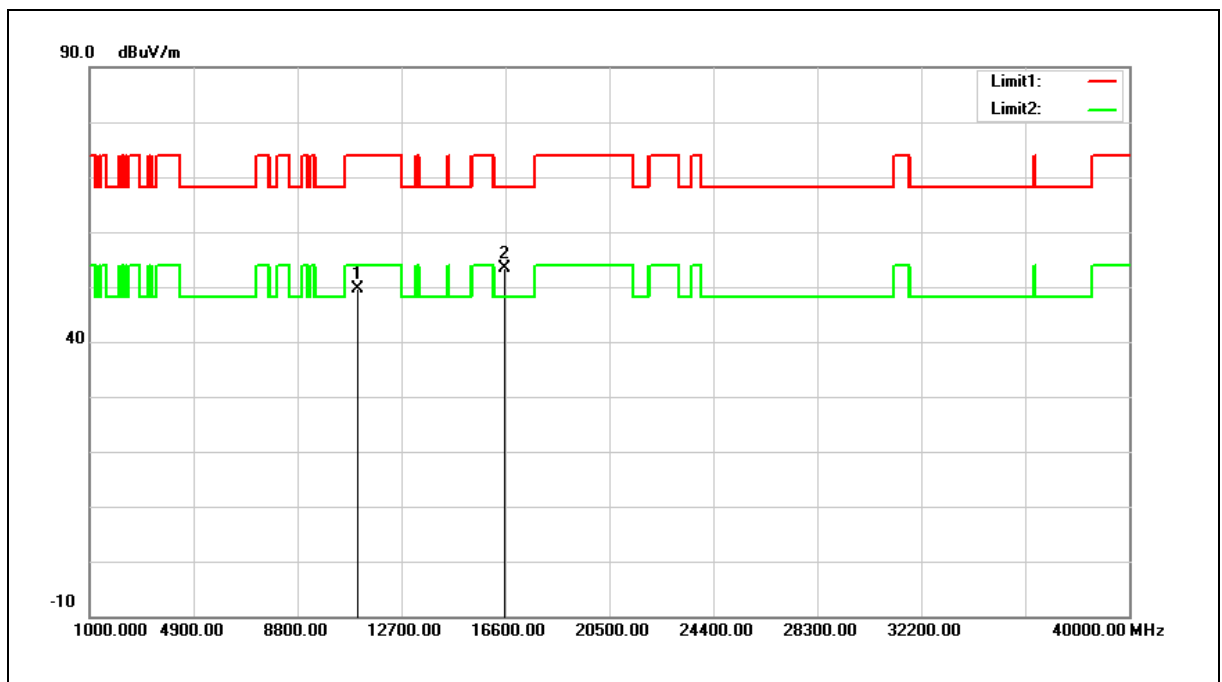


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	30.96	18.73	49.69	74.00	-24.31	peak
2	16590.000	31.25	22.15	53.40	68.20	-14.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

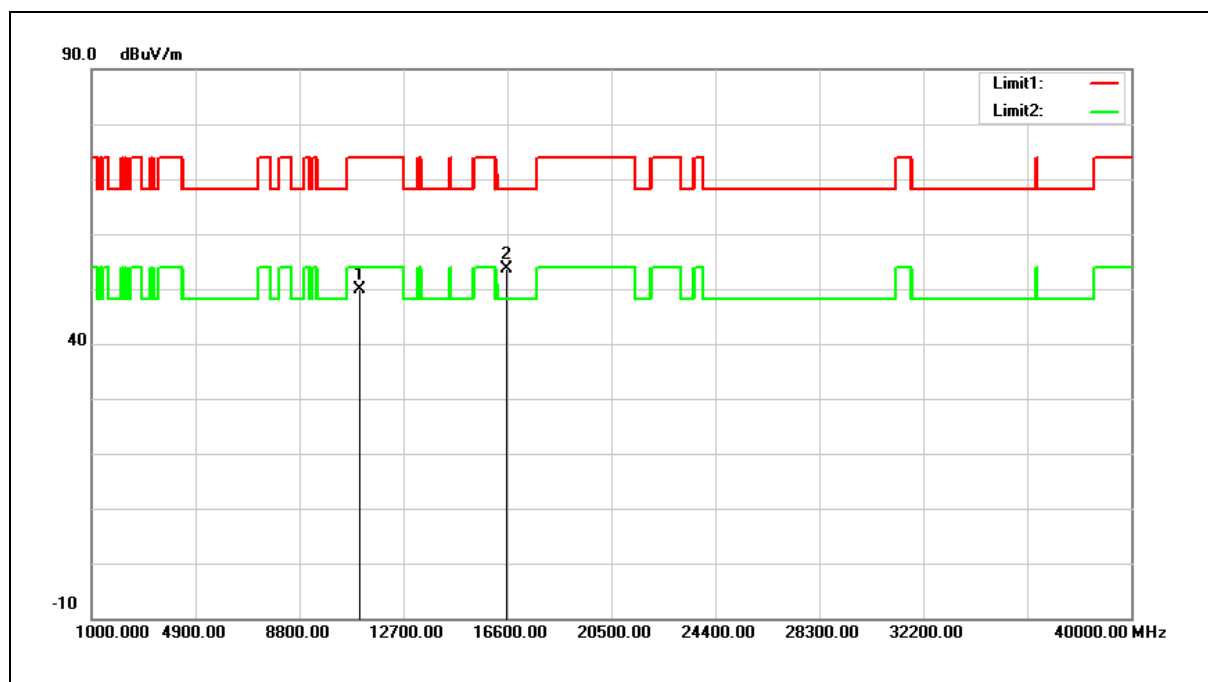


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	31.04	18.73	49.77	74.00	-24.23	peak
2	16590.000	31.53	22.15	53.68	68.20	-14.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

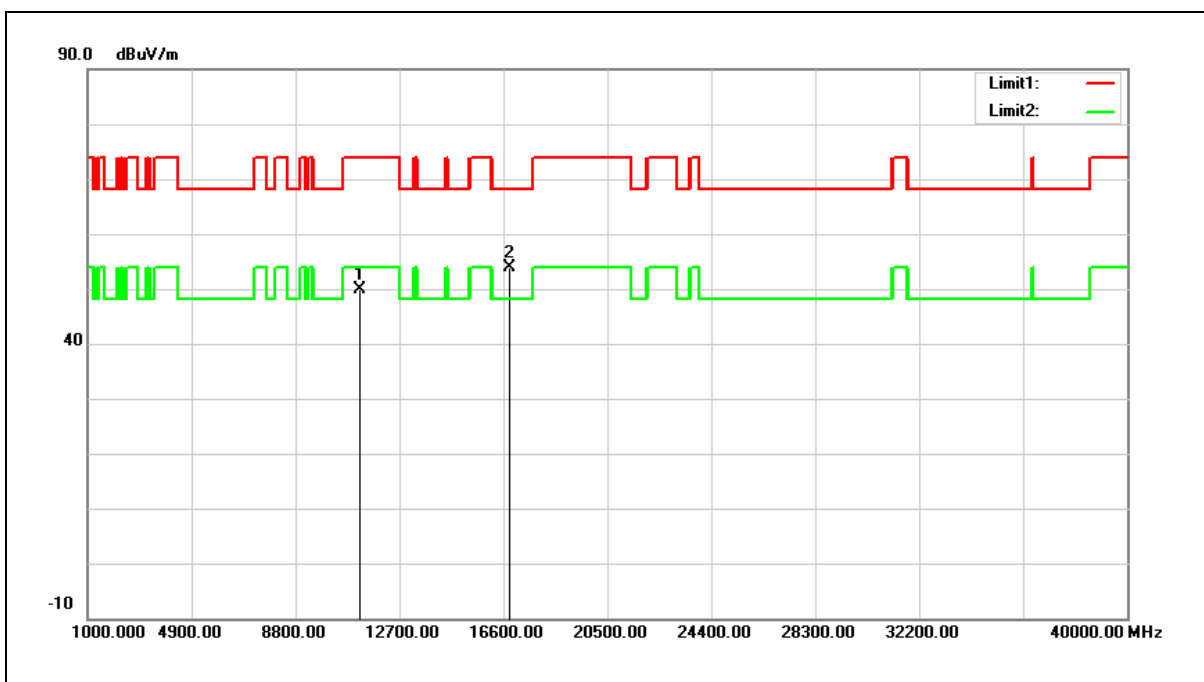


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	30.98	19.00	49.98	74.00	-24.02	peak
2	16830.000	30.36	23.46	53.82	68.20	-14.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

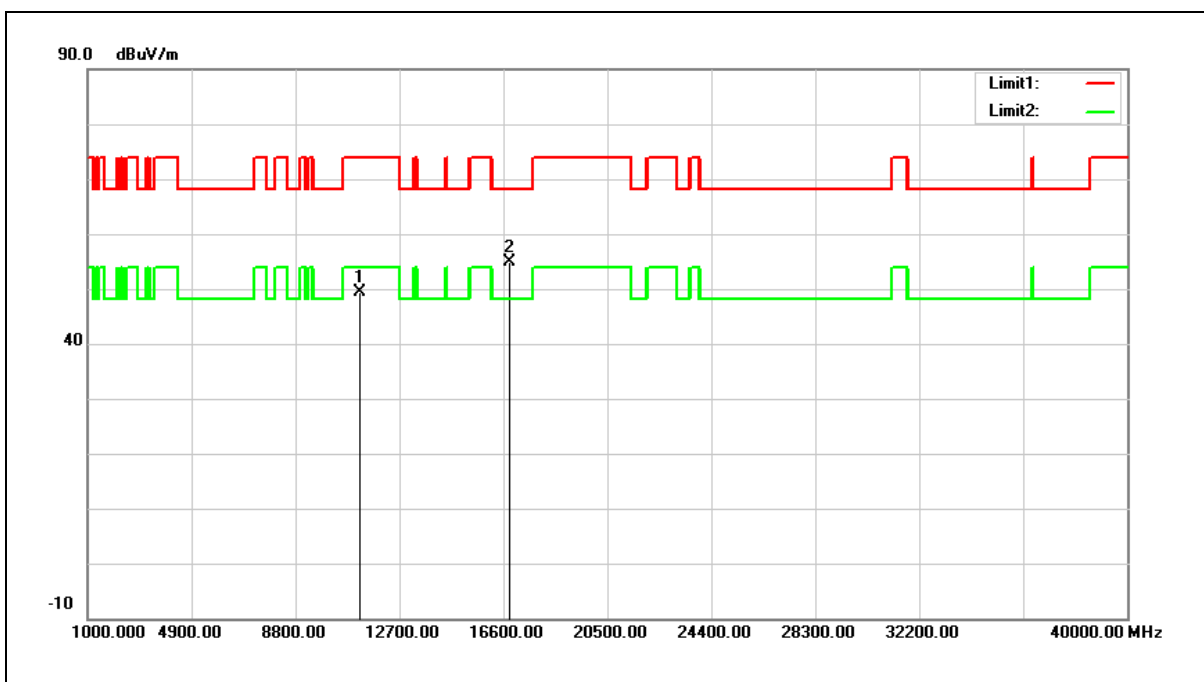


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	30.44	19.00	49.44	74.00	-24.56	peak
2	16830.000	31.35	23.46	54.81	68.20	-13.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

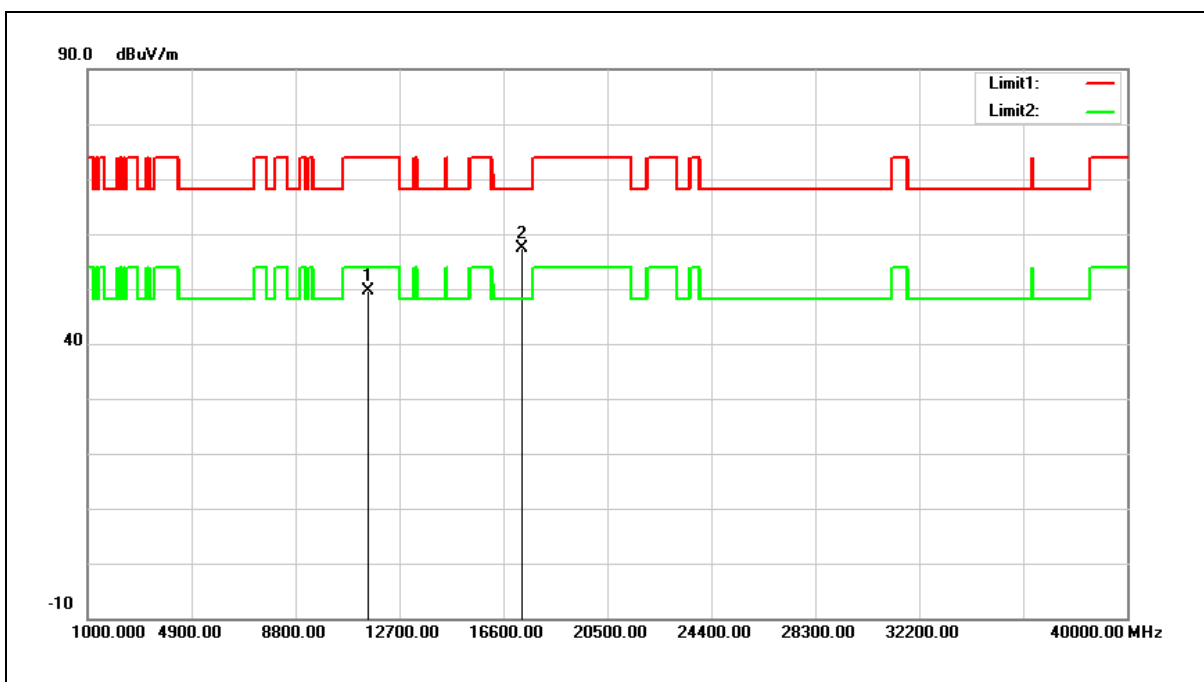


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	30.25	19.42	49.67	74.00	-24.33	peak
2	17325.000	32.02	25.25	57.27	68.20	-10.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

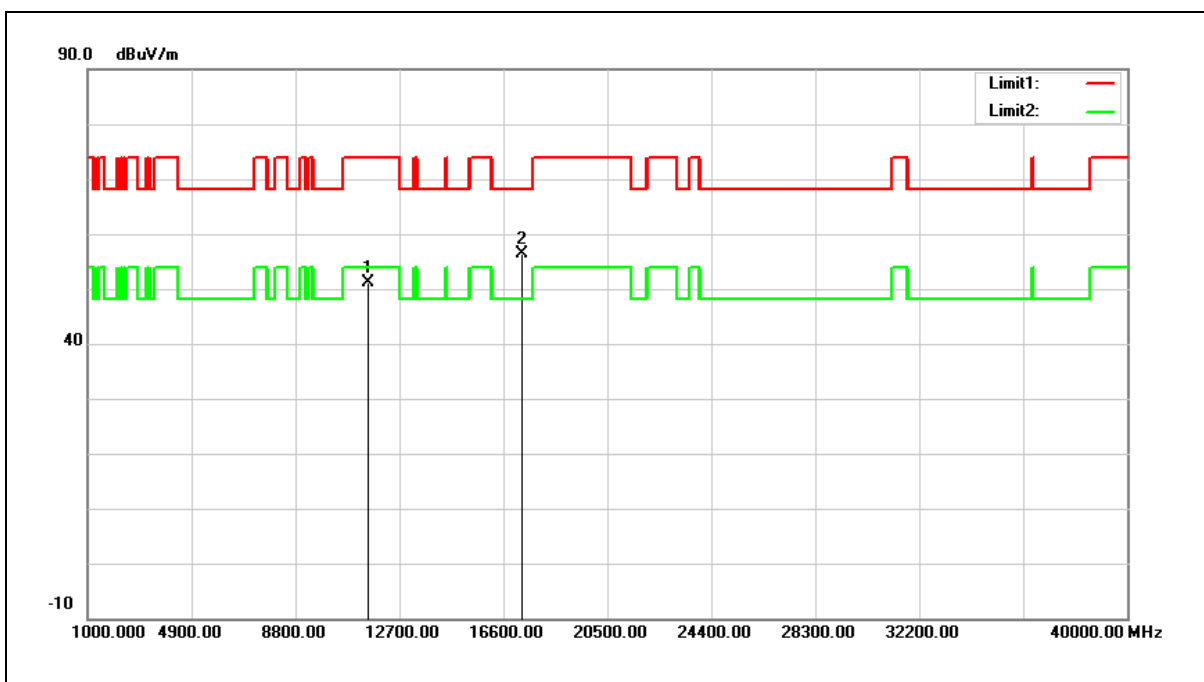


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	31.82	19.42	51.24	74.00	-22.76	peak
2	17325.000	31.13	25.25	56.38	68.20	-11.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Mode:	Simultaneous Transmitting (WLAN 5 GHz+ Bluetooth)	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

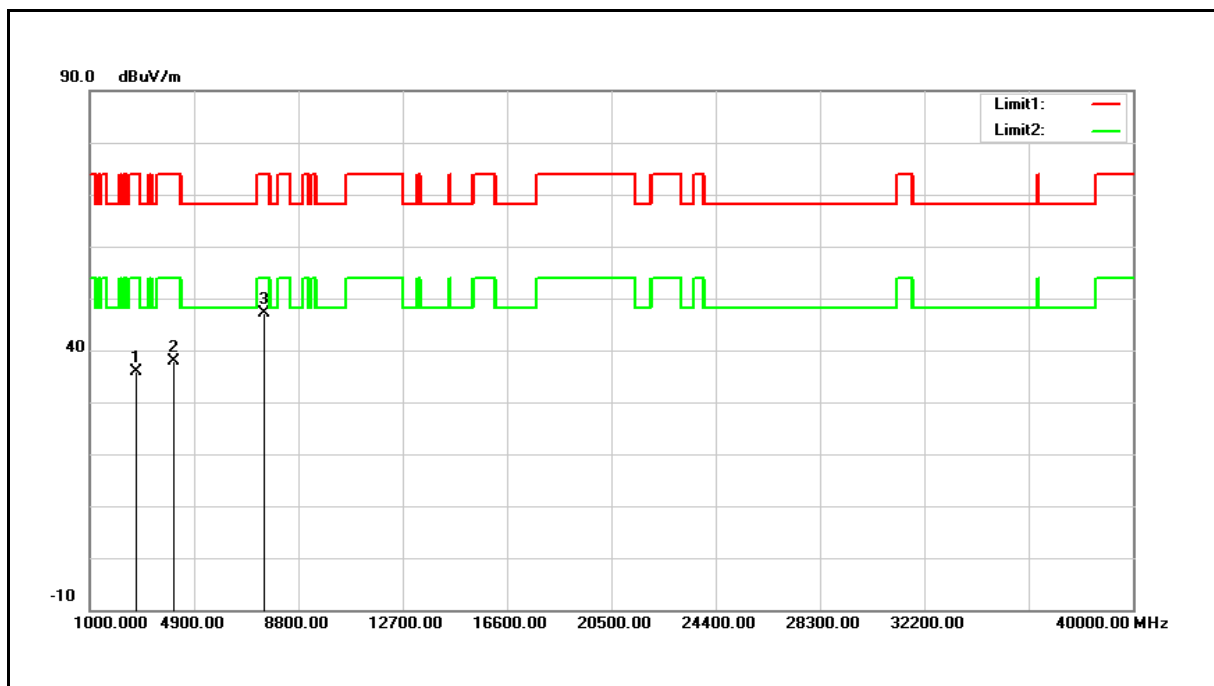


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	35.44	0.42	35.86	74.00	-38.14	peak
2	4145.000	33.61	4.29	37.90	74.00	-36.10	peak
3	7477.000	33.87	13.30	47.17	74.00	-26.83	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Mode:	Simultaneous Transmitting (WLAN 5 GHz+ Bluetooth)	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

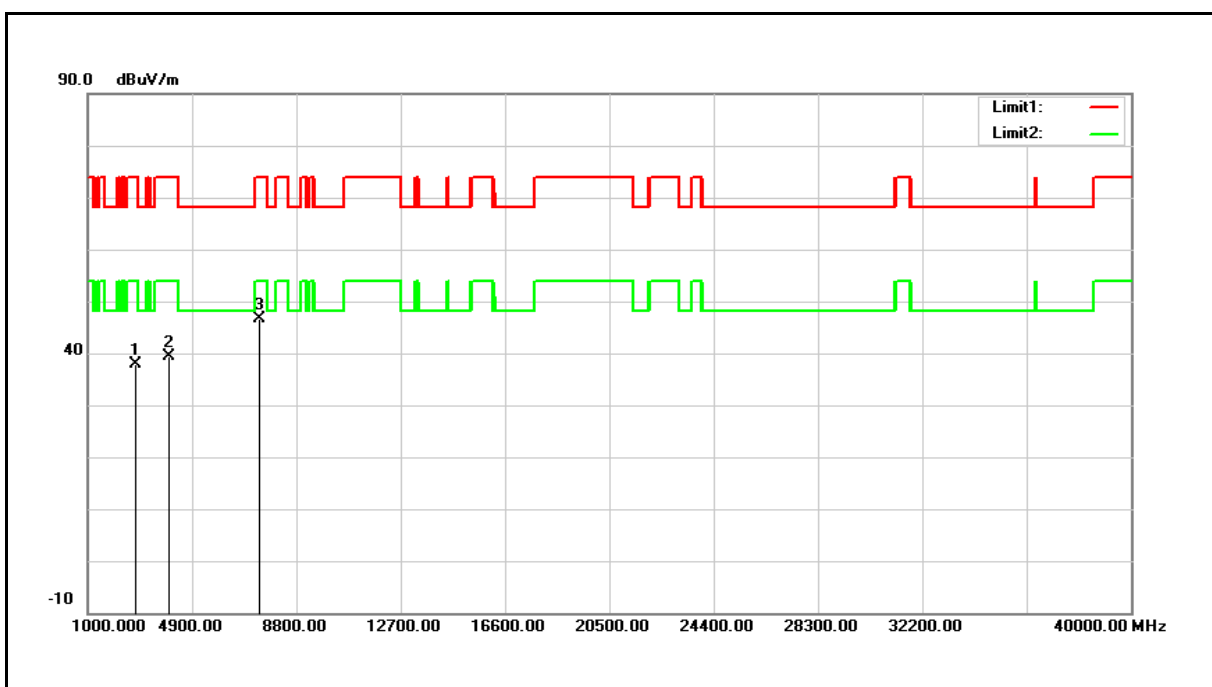


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	37.38	0.56	37.94	74.00	-36.06	peak
2	4043.000	35.39	4.10	39.49	74.00	-34.51	peak
3	7409.000	33.52	13.07	46.59	74.00	-27.41	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Mode:	Mode 12	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		
Description:			

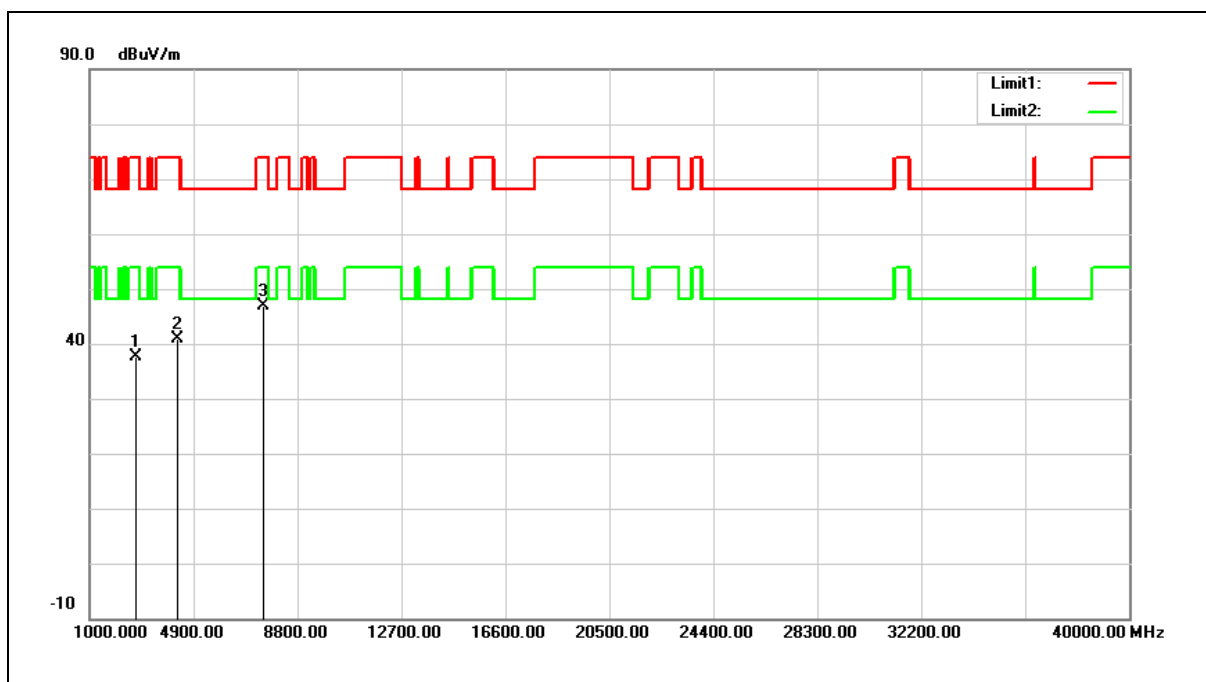


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2734.000	37.34	0.37	37.71	74.00	-36.29	peak
2	4247.000	36.44	4.50	40.94	74.00	-33.06	peak
3	7494.000	33.52	13.36	46.88	74.00	-27.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Mode:	Mode 12	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		
Description:			

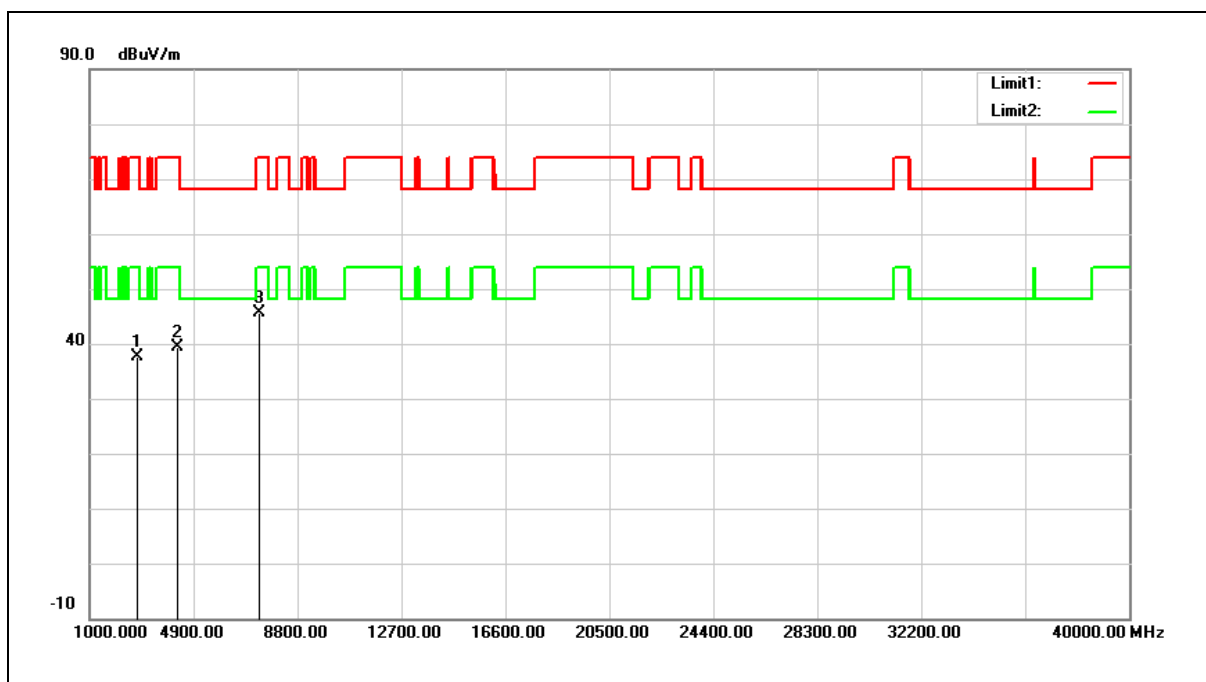

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	36.99	0.52	37.51	74.00	-36.49	peak
2	4281.000	34.78	4.55	39.33	74.00	-34.67	peak
3	7358.000	32.73	12.90	45.63	74.00	-28.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註: 其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射, 其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

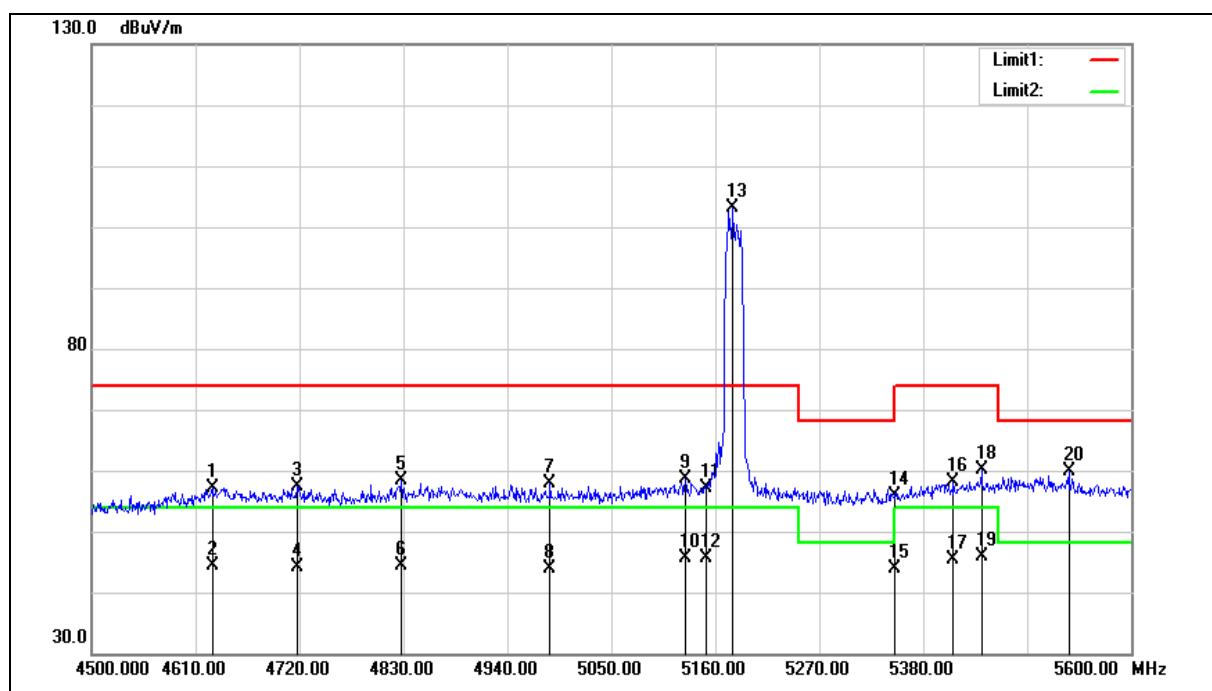

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4627.600	51.80	5.37	57.17	74.00	-16.83	peak
2	4627.600	38.95	5.37	44.32	54.00	-9.68	AVG
3	4717.800	51.64	5.64	57.28	74.00	-16.72	peak
4	4717.800	38.38	5.64	44.02	54.00	-9.98	AVG
5	4827.800	52.50	5.98	58.48	74.00	-15.52	peak
6	4827.800	38.38	5.98	44.36	54.00	-9.64	AVG
7	4985.100	51.35	6.47	57.82	74.00	-16.18	peak
8	4985.100	37.49	6.47	43.96	54.00	-10.04	AVG
9	5128.100	51.63	6.88	58.51	74.00	-15.49	peak
10	5128.100	38.74	6.88	45.62	54.00	-8.38	AVG
11	5150.000	50.09	6.94	57.03	74.00	-16.97	peak
12	5150.000	38.78	6.94	45.72	54.00	-8.28	AVG
13	5178.700	96.12	7.02	103.14	--	--	peak
14	5350.000	48.37	7.50	55.87	74.00	-18.13	peak
15	5350.000	36.48	7.50	43.98	54.00	-10.02	AVG
16	5411.900	50.38	7.68	58.06	74.00	-15.94	peak
17	5411.900	37.74	7.68	45.42	54.00	-8.58	AVG
18	5441.600	52.40	7.76	60.16	74.00	-13.84	peak
19	5441.600	38.15	7.76	45.91	54.00	-8.09	AVG
20	5534.000	51.78	7.99	59.77	68.20	-8.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

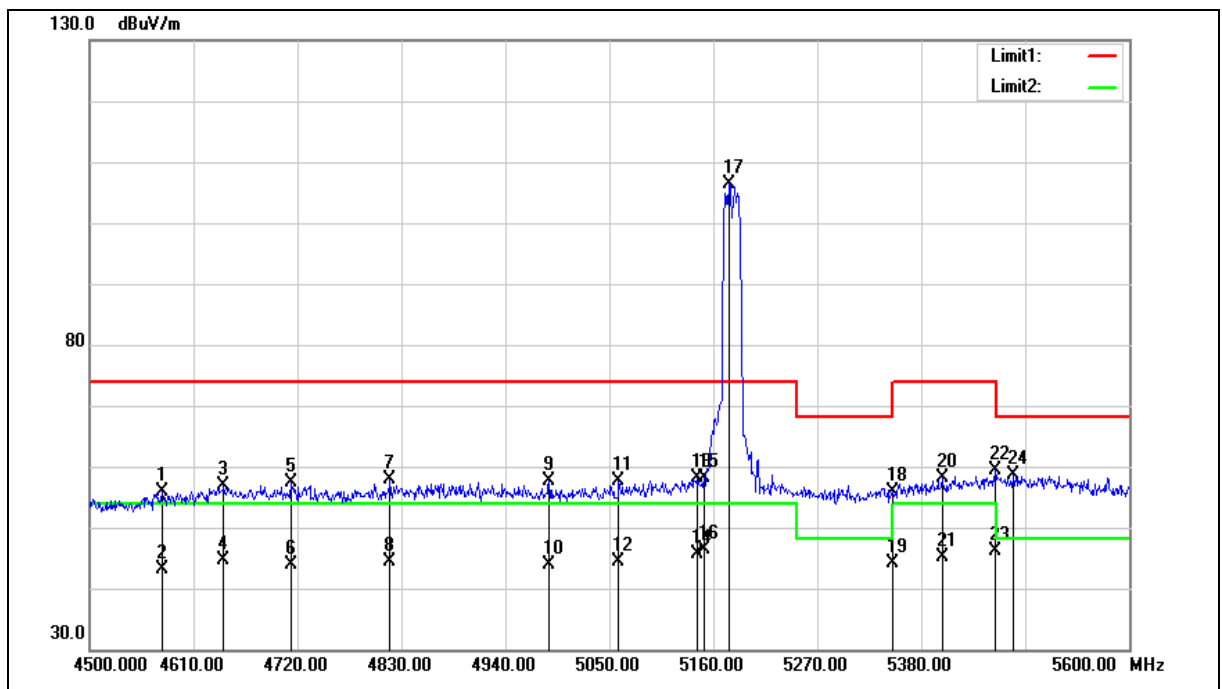

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4577.000	50.57	5.21	55.78	74.00	-18.22	peak
2	4577.000	37.90	5.21	43.11	54.00	-10.89	AVG
3	4641.900	51.45	5.41	56.86	74.00	-17.14	peak
4	4641.900	39.31	5.41	44.72	54.00	-9.28	AVG
5	4713.400	51.64	5.63	57.27	74.00	-16.73	peak
6	4713.400	38.26	5.63	43.89	54.00	-10.11	AVG
7	4817.900	51.89	5.95	57.84	74.00	-16.16	peak
8	4817.900	38.39	5.95	44.34	54.00	-9.66	AVG
9	4986.200	51.08	6.47	57.55	74.00	-16.45	peak
10	4986.200	37.52	6.47	43.99	54.00	-10.01	AVG
11	5059.900	50.88	6.68	57.56	74.00	-16.44	peak
12	5059.900	37.61	6.68	44.29	54.00	-9.71	AVG
13	5143.500	51.10	6.92	58.02	74.00	-15.98	peak
14	5143.500	38.79	6.92	45.71	54.00	-8.29	AVG
15	5150.000	51.07	6.94	58.01	74.00	-15.99	peak
16	5150.000	39.39	6.94	46.33	54.00	-7.67	AVG
17	5176.500	99.45	7.02	106.47	--	--	peak
18	5350.000	48.37	7.50	55.87	74.00	-18.13	peak
19	5350.000	36.52	7.50	44.02	54.00	-9.98	AVG
20	5402.000	50.38	7.65	58.03	74.00	-15.97	peak
21	5402.000	37.56	7.65	45.21	54.00	-8.79	AVG
22	5458.100	51.46	7.81	59.27	74.00	-14.73	peak
23	5458.100	38.23	7.81	46.04	54.00	-7.96	AVG
24	5477.900	50.66	7.87	58.53	68.20	-9.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

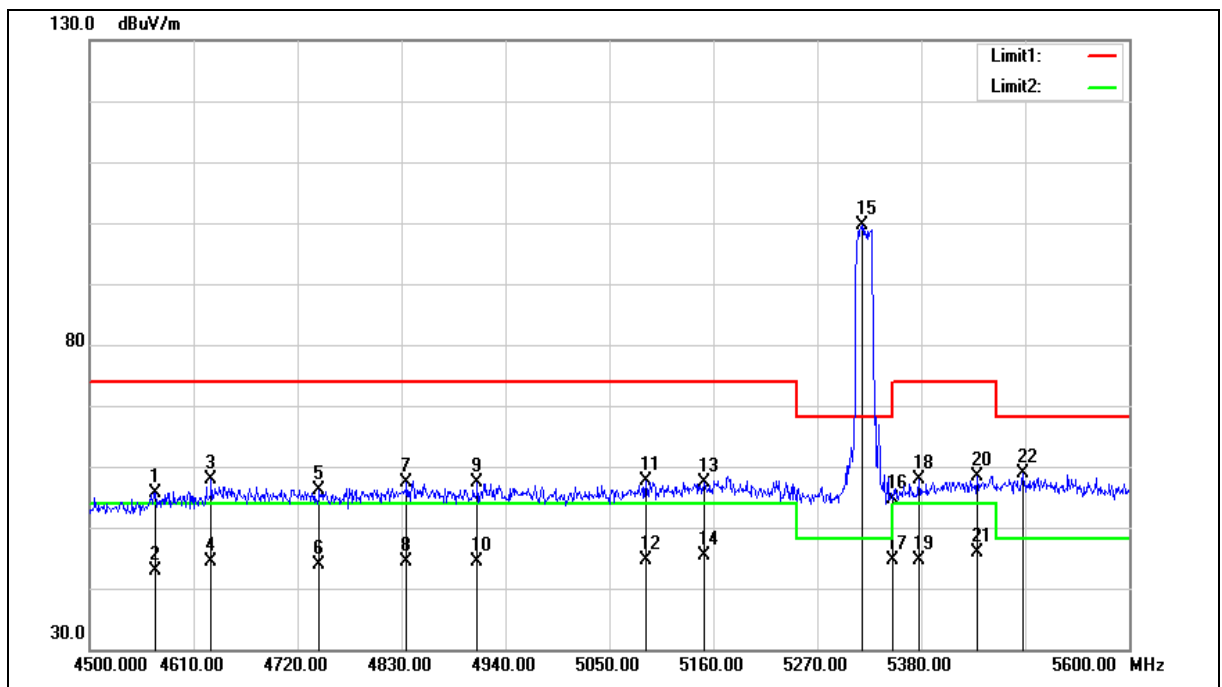

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4569.300	50.43	5.19	55.62	74.00	-18.38	peak
2	4569.300	37.70	5.19	42.89	54.00	-11.11	AVG
3	4628.700	52.45	5.37	57.82	74.00	-16.18	peak
4	4628.700	39.11	5.37	44.48	54.00	-9.52	AVG
5	4743.100	50.52	5.72	56.24	74.00	-17.76	peak
6	4743.100	38.27	5.72	43.99	54.00	-10.01	AVG
7	4835.500	51.31	6.00	57.31	74.00	-16.69	peak
8	4835.500	38.41	6.00	44.41	54.00	-9.59	AVG
9	4910.300	51.20	6.24	57.44	74.00	-16.56	peak
10	4910.300	38.04	6.24	44.28	54.00	-9.72	AVG
11	5088.500	50.93	6.76	57.69	74.00	-16.31	peak
12	5088.500	37.91	6.76	44.67	54.00	-9.33	AVG
13	5150.000	50.42	6.94	57.36	74.00	-16.64	peak
14	5150.000	38.35	6.94	45.29	54.00	-8.71	AVG
15	5317.300	92.24	7.41	99.65	--	--	peak
16	5350.000	47.10	7.50	54.60	74.00	-19.40	peak
17	5350.000	37.02	7.50	44.52	54.00	-9.48	AVG
18	5377.800	50.29	7.59	57.88	74.00	-16.12	peak
19	5377.800	37.11	7.59	44.70	54.00	-9.30	AVG
20	5439.400	50.61	7.76	58.37	74.00	-15.63	peak
21	5439.400	38.13	7.76	45.89	54.00	-8.11	AVG
22	5487.800	50.96	7.90	58.86	68.20	-9.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

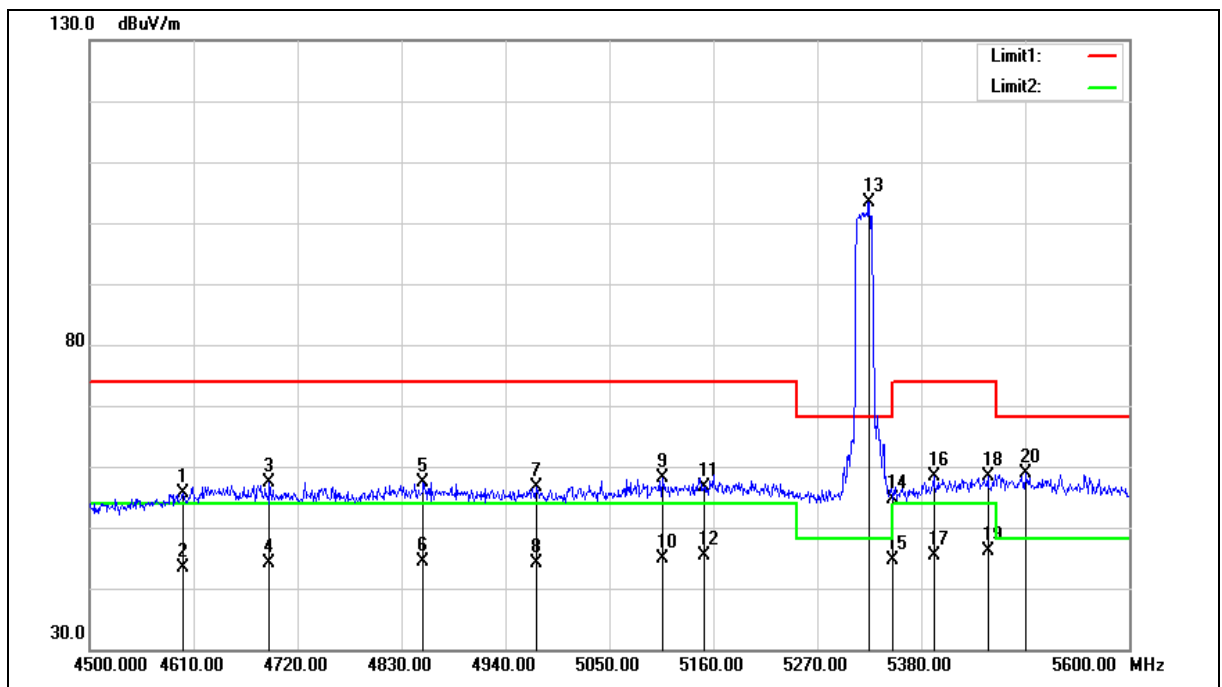

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4599.000	50.33	5.29	55.62	74.00	-18.38	peak
2	4599.000	38.11	5.29	43.40	54.00	-10.60	AVG
3	4690.300	51.87	5.56	57.43	74.00	-16.57	peak
4	4690.300	38.46	5.56	44.02	54.00	-9.98	AVG
5	4853.100	51.41	6.07	57.48	74.00	-16.52	peak
6	4853.100	38.41	6.07	44.48	54.00	-9.52	AVG
7	4973.000	50.19	6.43	56.62	74.00	-17.38	peak
8	4973.000	37.60	6.43	44.03	54.00	-9.97	AVG
9	5106.100	51.25	6.81	58.06	74.00	-15.94	peak
10	5106.100	38.11	6.81	44.92	54.00	-9.08	AVG
11	5150.000	49.61	6.94	56.55	74.00	-17.45	peak
12	5150.000	38.43	6.94	45.37	54.00	-8.63	AVG
13	5325.000	95.97	7.44	103.41	--	--	peak
14	5350.000	47.17	7.50	54.67	74.00	-19.33	peak
15	5350.000	37.03	7.50	44.53	54.00	-9.47	AVG
16	5393.200	50.69	7.63	58.32	74.00	-15.68	peak
17	5393.200	37.73	7.63	45.36	54.00	-8.64	AVG
18	5450.400	50.49	7.79	58.28	74.00	-15.72	peak
19	5450.400	38.22	7.79	46.01	54.00	-7.99	AVG
20	5491.100	50.94	7.90	58.84	68.20	-9.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

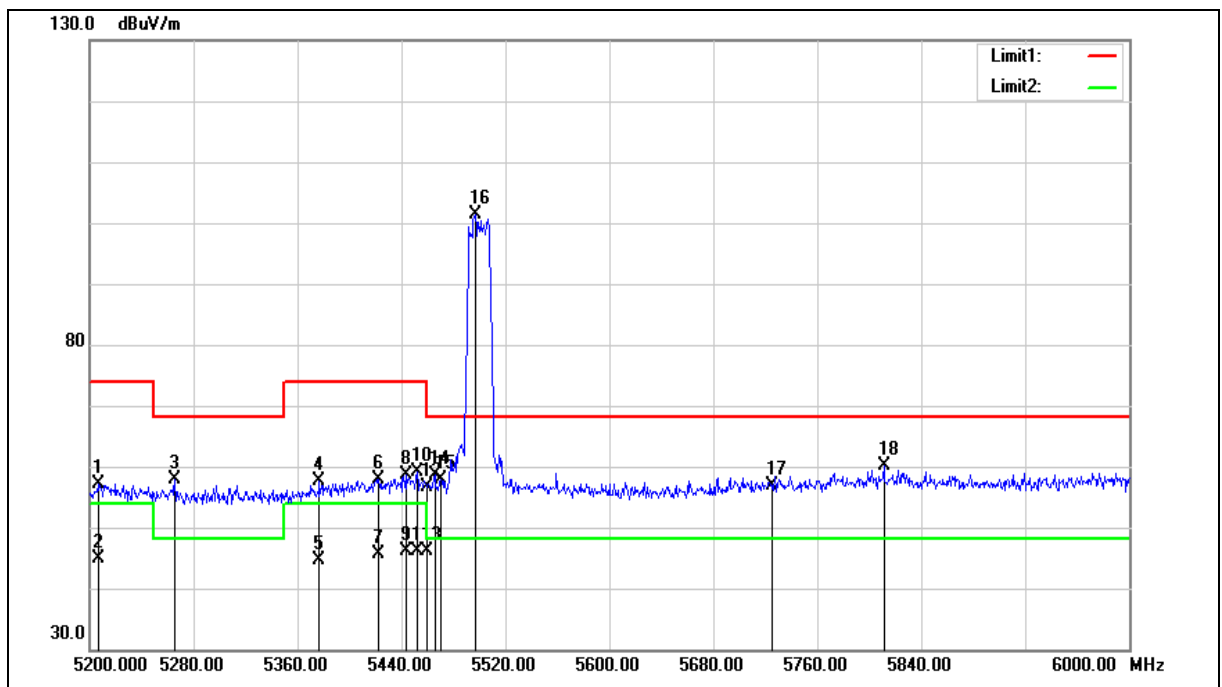

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5206.400	50.07	7.10	57.17	74.00	-16.83	peak
2	5206.400	37.88	7.10	44.98	54.00	-9.02	AVG
3	5265.600	50.51	7.27	57.78	68.20	-10.42	peak
4	5376.800	50.07	7.59	57.66	74.00	-16.34	peak
5	5376.800	37.09	7.59	44.68	54.00	-9.32	AVG
6	5422.400	50.19	7.71	57.90	74.00	-16.10	peak
7	5422.400	37.91	7.71	45.62	54.00	-8.38	AVG
8	5443.200	50.84	7.77	58.61	74.00	-15.39	peak
9	5443.200	38.31	7.77	46.08	54.00	-7.92	AVG
10	5452.000	51.31	7.79	59.10	74.00	-14.90	peak
11	5452.000	38.24	7.79	46.03	54.00	-7.97	AVG
12	5460.000	48.91	7.82	56.73	74.00	-17.27	peak
13	5460.000	38.35	7.82	46.17	54.00	-7.83	AVG
14	5465.600	50.79	7.84	58.63	68.20	-9.57	peak
15	5470.000	50.03	7.85	57.88	68.20	-10.32	peak
16	5496.800	93.38	7.92	101.30	--	--	peak
17	5725.000	48.40	8.39	56.79	68.20	-11.41	peak
18	5811.200	51.65	8.55	60.20	68.20	-8.00	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

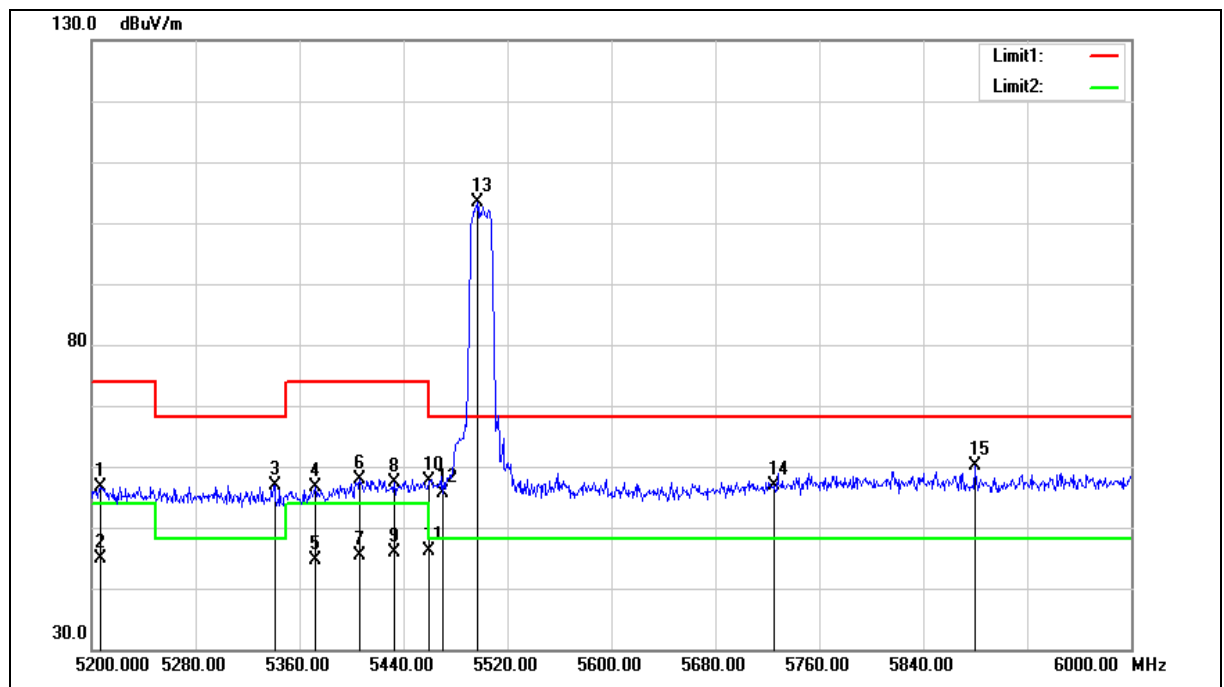

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5207.200	49.58	7.10	56.68	74.00	-17.32	peak
2	5207.200	37.86	7.10	44.96	54.00	-9.04	AVG
3	5340.800	49.49	7.47	56.96	68.20	-11.24	peak
4	5372.000	49.07	7.56	56.63	74.00	-17.37	peak
5	5372.000	36.97	7.56	44.53	54.00	-9.47	AVG
6	5406.400	50.32	7.67	57.99	74.00	-16.01	peak
7	5406.400	37.67	7.67	45.34	54.00	-8.66	AVG
8	5432.800	49.59	7.74	57.33	74.00	-16.67	peak
9	5432.800	38.08	7.74	45.82	54.00	-8.18	AVG
10	5460.000	49.69	7.82	57.51	74.00	-16.49	peak
11	5460.000	38.37	7.82	46.19	54.00	-7.81	AVG
12	5470.000	47.85	7.85	55.70	68.20	-12.50	peak
13	5496.800	95.54	7.92	103.46	--	--	peak
14	5725.000	48.37	8.39	56.76	68.20	-11.44	peak
15	5880.000	51.36	8.70	60.06	68.20	-8.14	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

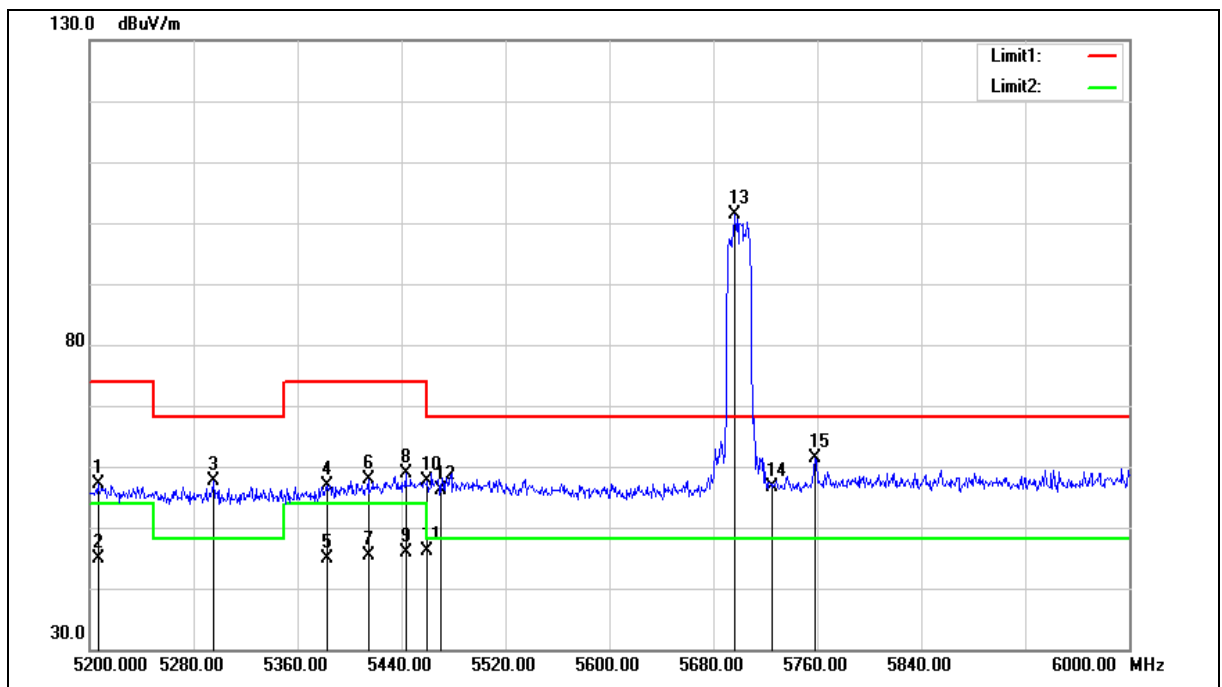

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5206.400	49.97	7.10	57.07	74.00	-16.93	peak
2	5206.400	37.83	7.10	44.93	54.00	-9.07	AVG
3	5295.200	50.27	7.35	57.62	68.20	-10.58	peak
4	5382.400	49.31	7.60	56.91	74.00	-17.09	peak
5	5382.400	37.20	7.60	44.80	54.00	-9.20	AVG
6	5414.400	50.07	7.69	57.76	74.00	-16.24	peak
7	5414.400	37.80	7.69	45.49	54.00	-8.51	AVG
8	5443.200	51.03	7.77	58.80	74.00	-15.20	peak
9	5443.200	38.21	7.77	45.98	54.00	-8.02	AVG
10	5460.000	49.92	7.82	57.74	74.00	-16.26	peak
11	5460.000	38.34	7.82	46.16	54.00	-7.84	AVG
12	5470.000	48.34	7.85	56.19	68.20	-12.01	peak
13	5696.800	92.97	8.33	101.30	--	--	peak
14	5725.000	48.15	8.39	56.54	68.20	-11.66	peak
15	5758.400	52.85	8.45	61.30	68.20	-6.90	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

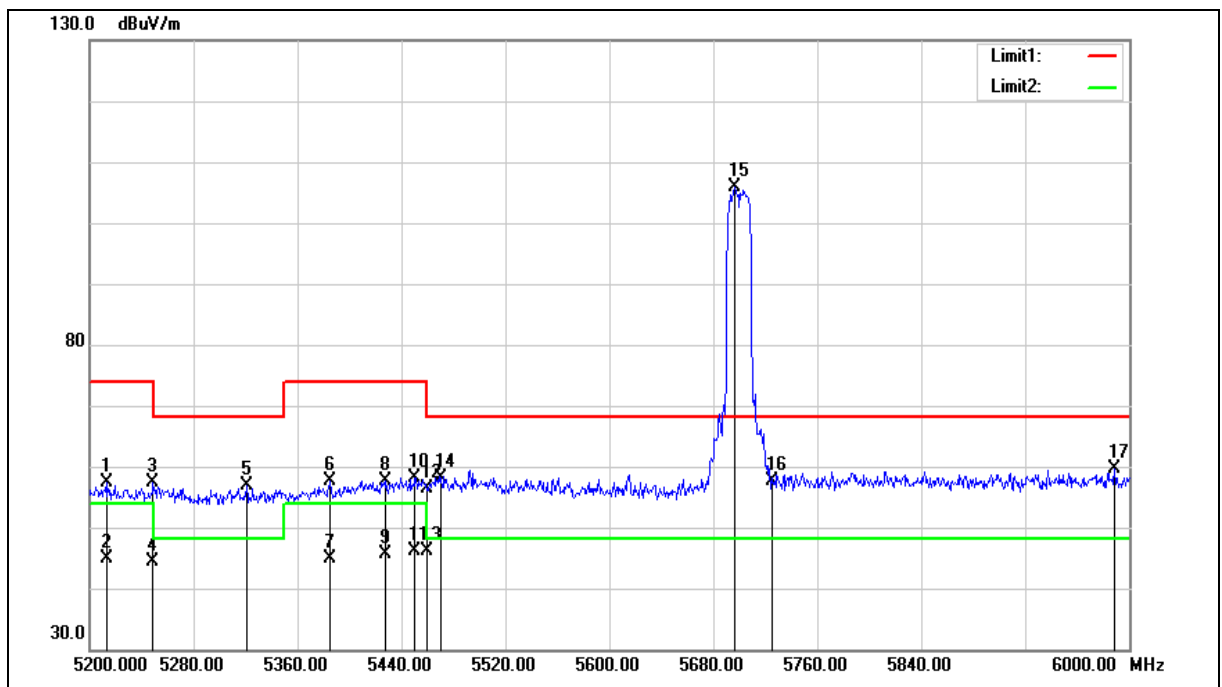

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.800	50.25	7.11	57.36	74.00	-16.64	peak
2	5212.800	37.76	7.11	44.87	54.00	-9.13	AVG
3	5248.800	50.19	7.22	57.41	74.00	-16.59	peak
4	5248.800	37.12	7.22	44.34	54.00	-9.66	AVG
5	5320.800	49.39	7.42	56.81	68.20	-11.39	peak
6	5384.800	50.00	7.60	57.60	74.00	-16.40	peak
7	5384.800	37.27	7.60	44.87	54.00	-9.13	AVG
8	5428.000	49.95	7.73	57.68	74.00	-16.32	peak
9	5428.000	38.00	7.73	45.73	54.00	-8.27	AVG
10	5450.400	50.44	7.79	58.23	74.00	-15.77	peak
11	5450.400	38.22	7.79	46.01	54.00	-7.99	AVG
12	5460.000	48.65	7.82	56.47	74.00	-17.53	peak
13	5460.000	38.33	7.82	46.15	54.00	-7.85	AVG
14	5470.000	50.16	7.85	58.01	68.20	-10.19	peak
15	5696.000	97.64	8.33	105.97	--	--	peak
16	5725.000	49.30	8.39	57.69	68.20	-10.51	peak
17	5988.800	50.81	8.92	59.73	68.20	-8.47	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

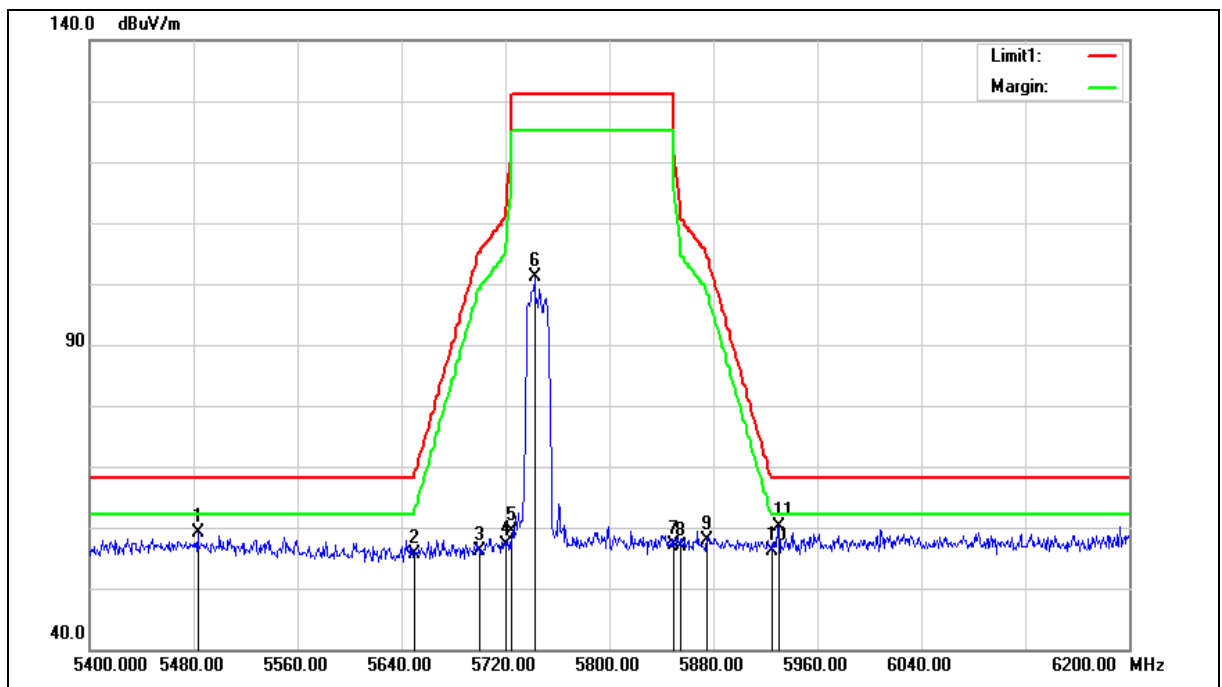

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5483.200	51.23	7.88	59.11	68.20	-9.09	peak
2	5650.000	47.40	8.24	55.64	68.20	-12.56	peak
3	5700.000	47.81	8.34	56.15	105.20	-49.05	peak
4	5720.000	48.66	8.38	57.04	110.80	-53.76	peak
5	5725.000	50.90	8.39	59.29	122.20	-62.91	peak
6	5742.400	92.60	8.42	101.02	--	--	peak
7	5850.000	48.46	8.63	57.09	122.20	-65.11	peak
8	5855.000	48.17	8.64	56.81	110.80	-53.99	peak
9	5875.000	49.29	8.69	57.98	105.20	-47.22	peak
10	5925.000	47.37	8.79	56.16	68.20	-12.04	peak
11	5930.400	51.32	8.80	60.12	68.20	-8.08	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

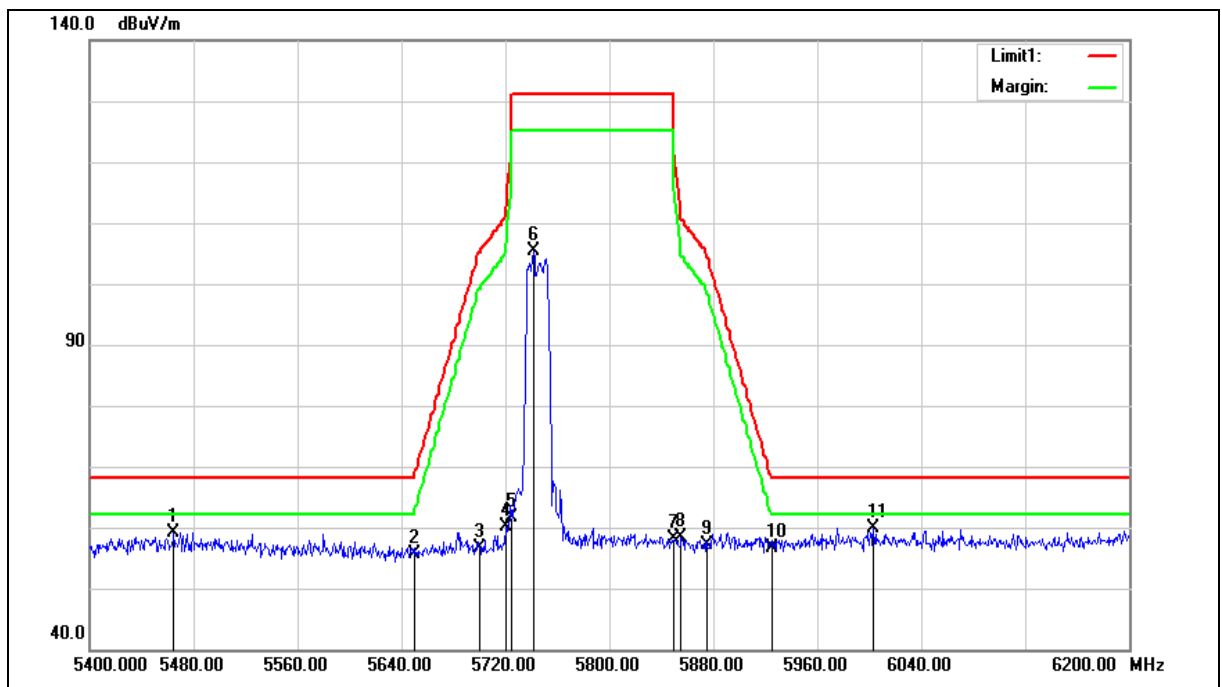

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5464.800	51.32	7.83	59.15	68.20	-9.05	peak
2	5650.000	47.31	8.24	55.55	68.20	-12.65	peak
3	5700.000	48.28	8.34	56.62	105.20	-48.58	peak
4	5720.000	51.83	8.38	60.21	110.80	-50.59	peak
5	5725.000	53.32	8.39	61.71	122.20	-60.49	peak
6	5741.600	96.85	8.42	105.27	--	--	peak
7	5850.000	49.49	8.63	58.12	122.20	-64.08	peak
8	5855.000	49.65	8.64	58.29	110.80	-52.51	peak
9	5875.000	48.47	8.69	57.16	105.20	-48.04	peak
10	5925.000	47.77	8.79	56.56	68.20	-11.64	peak
11	6003.200	50.94	8.95	59.89	68.20	-8.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

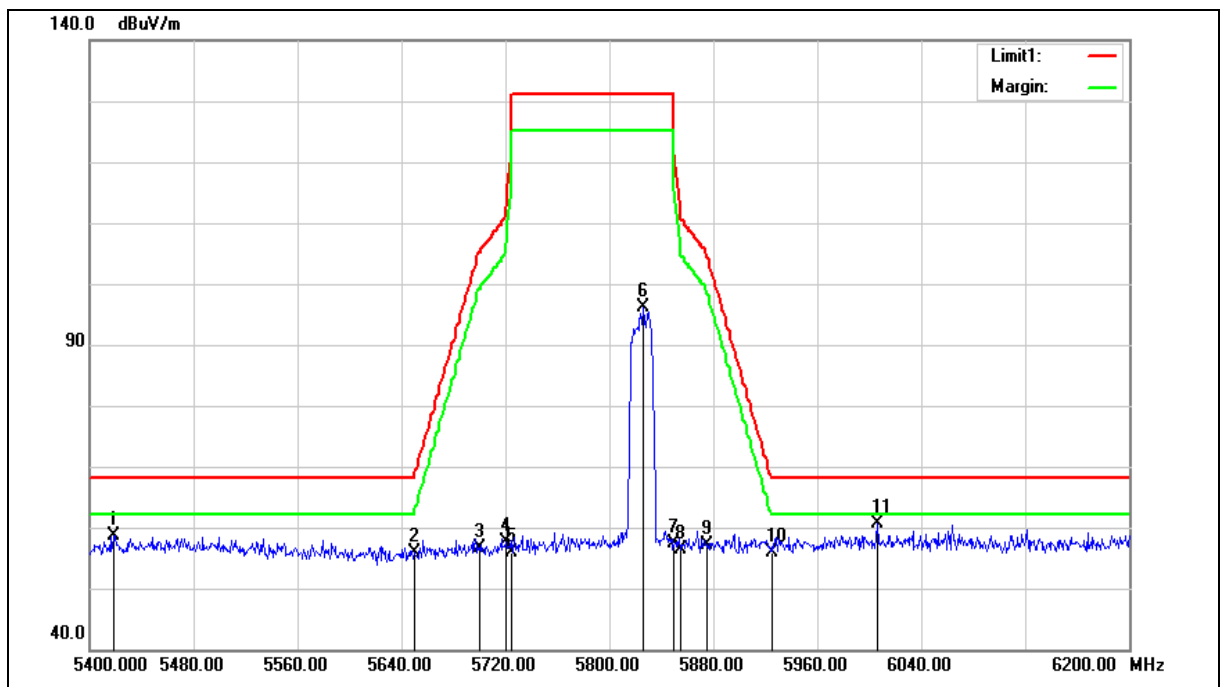

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5418.400	51.01	7.70	58.71	68.20	-9.49	peak
2	5650.000	47.75	8.24	55.99	68.20	-12.21	peak
3	5700.000	48.23	8.34	56.57	105.20	-48.63	peak
4	5720.000	49.20	8.38	57.58	110.80	-53.22	peak
5	5725.000	47.46	8.39	55.85	122.20	-66.35	peak
6	5825.600	87.54	8.59	96.13	--	--	peak
7	5850.000	48.76	8.63	57.39	122.20	-64.81	peak
8	5855.000	47.76	8.64	56.40	110.80	-54.40	peak
9	5875.000	48.32	8.69	57.01	105.20	-48.19	peak
10	5925.000	47.21	8.79	56.00	68.20	-12.20	peak
11	6006.400	51.61	8.96	60.57	68.20	-7.63	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

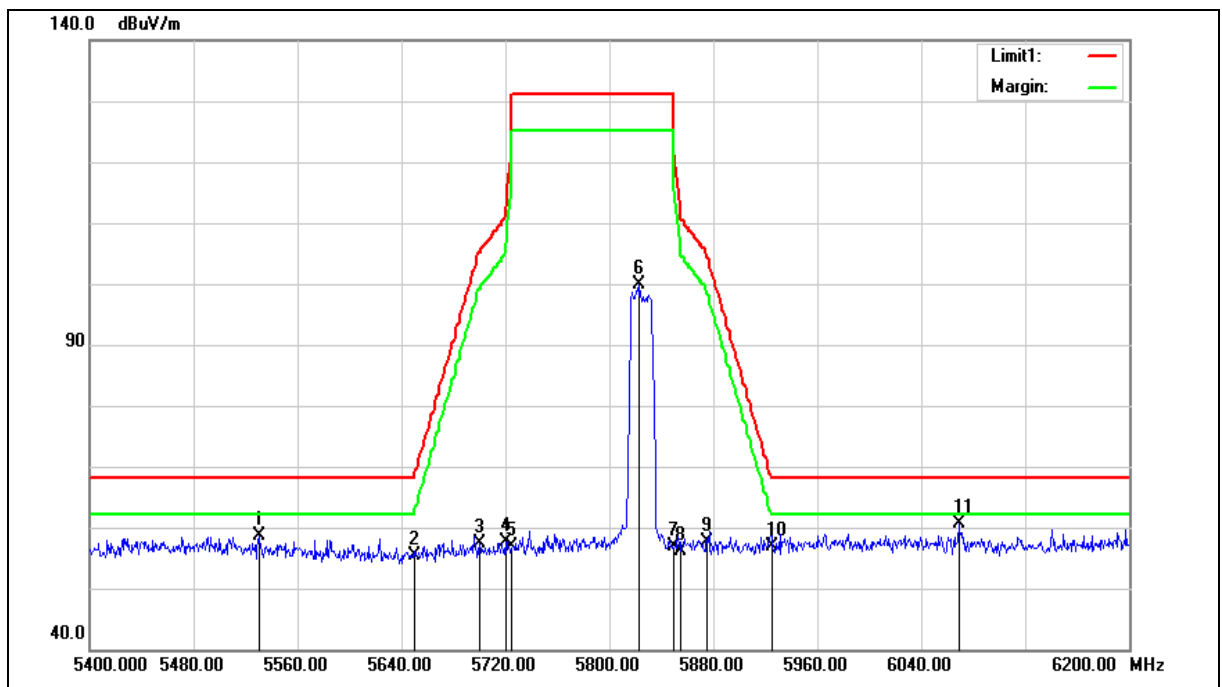

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5530.400	50.62	7.99	58.61	68.20	-9.59	peak
2	5650.000	47.10	8.24	55.34	68.20	-12.86	peak
3	5700.000	49.13	8.34	57.47	105.20	-47.73	peak
4	5720.000	49.27	8.38	57.65	110.80	-53.15	peak
5	5725.000	48.51	8.39	56.90	122.20	-65.30	peak
6	5823.200	91.18	8.58	99.76	--	--	peak
7	5850.000	48.18	8.63	56.81	122.20	-65.39	peak
8	5855.000	47.53	8.64	56.17	110.80	-54.63	peak
9	5875.000	48.82	8.69	57.51	105.20	-47.69	peak
10	5925.000	48.18	8.79	56.97	68.20	-11.23	peak
11	6068.800	51.46	9.15	60.61	68.20	-7.59	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

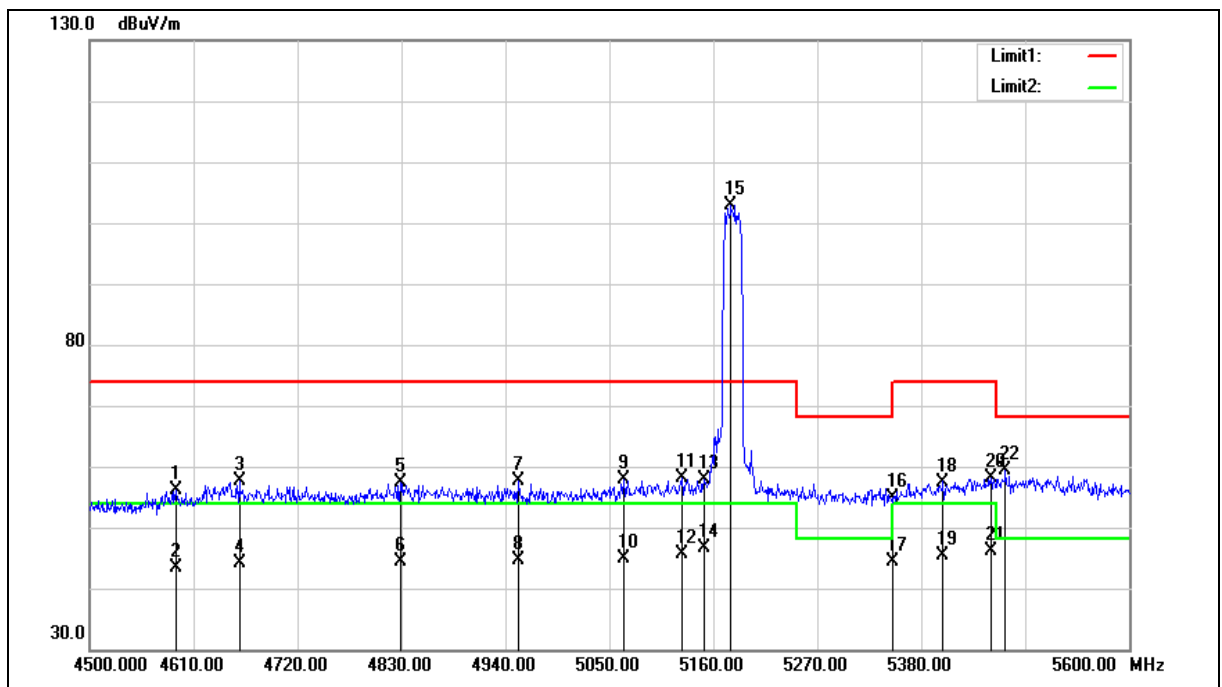

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4591.300	50.99	5.25	56.24	74.00	-17.76	peak
2	4591.300	38.17	5.25	43.42	54.00	-10.58	AVG
3	4658.400	52.17	5.47	57.64	74.00	-16.36	peak
4	4658.400	38.73	5.47	44.20	54.00	-9.80	AVG
5	4828.900	51.31	5.98	57.29	74.00	-16.71	peak
6	4828.900	38.50	5.98	44.48	54.00	-9.52	AVG
7	4953.200	51.34	6.37	57.71	74.00	-16.29	peak
8	4953.200	38.32	6.37	44.69	54.00	-9.31	AVG
9	5065.400	51.09	6.70	57.79	74.00	-16.21	peak
10	5065.400	38.12	6.70	44.82	54.00	-9.18	AVG
11	5127.000	51.14	6.88	58.02	74.00	-15.98	peak
12	5127.000	38.80	6.88	45.68	54.00	-8.32	AVG
13	5150.000	51.01	6.94	57.95	74.00	-16.05	peak
14	5150.000	39.65	6.94	46.59	54.00	-7.41	AVG
15	5178.700	95.90	7.02	102.92	--	--	peak
16	5350.000	47.37	7.50	54.87	74.00	-19.13	peak
17	5350.000	36.77	7.50	44.27	54.00	-9.73	AVG
18	5403.100	49.84	7.66	57.50	74.00	-16.50	peak
19	5403.100	37.69	7.66	45.35	54.00	-8.65	AVG
20	5453.700	50.38	7.80	58.18	74.00	-15.82	peak
21	5453.700	38.28	7.80	46.08	54.00	-7.92	AVG
22	5469.100	51.61	7.84	59.45	68.20	-8.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

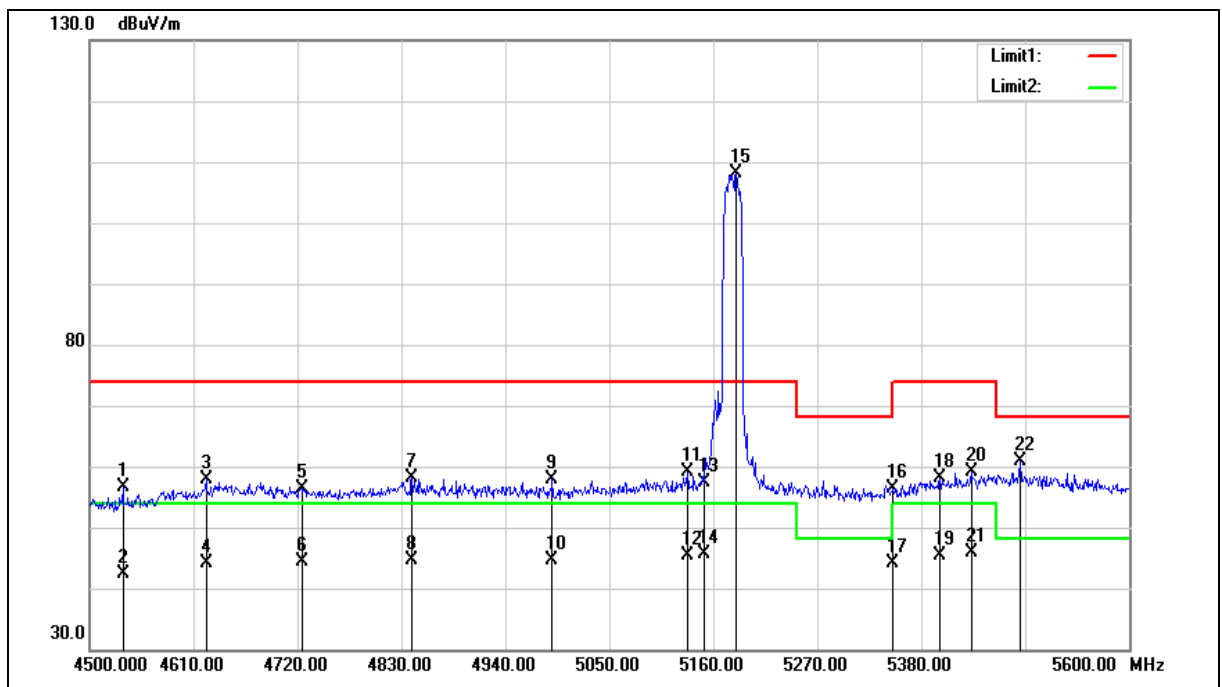

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4535.200	51.54	5.09	56.63	74.00	-17.37	peak
2	4535.200	37.29	5.09	42.38	54.00	-11.62	AVG
3	4623.200	52.44	5.36	57.80	74.00	-16.20	peak
4	4623.200	38.87	5.36	44.23	54.00	-9.77	AVG
5	4724.400	50.71	5.67	56.38	74.00	-17.62	peak
6	4724.400	38.80	5.67	44.47	54.00	-9.53	AVG
7	4841.000	52.18	6.02	58.20	74.00	-15.80	peak
8	4841.000	38.60	6.02	44.62	54.00	-9.38	AVG
9	4989.500	51.29	6.48	57.77	74.00	-16.23	peak
10	4989.500	38.20	6.48	44.68	54.00	-9.32	AVG
11	5132.500	52.31	6.89	59.20	74.00	-14.80	peak
12	5132.500	38.40	6.89	45.29	54.00	-8.71	AVG
13	5150.000	50.40	6.94	57.34	74.00	-16.66	peak
14	5150.000	38.66	6.94	45.60	54.00	-8.40	AVG
15	5184.200	101.12	7.03	108.15	--	--	peak
16	5350.000	48.79	7.50	56.29	74.00	-17.71	peak
17	5350.000	36.57	7.50	44.07	54.00	-9.93	AVG
18	5399.800	50.49	7.65	58.14	74.00	-15.86	peak
19	5399.800	37.62	7.65	45.27	54.00	-8.73	AVG
20	5432.800	51.28	7.74	59.02	74.00	-14.98	peak
21	5432.800	38.15	7.74	45.89	54.00	-8.11	AVG
22	5484.500	52.92	7.88	60.80	68.20	-7.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

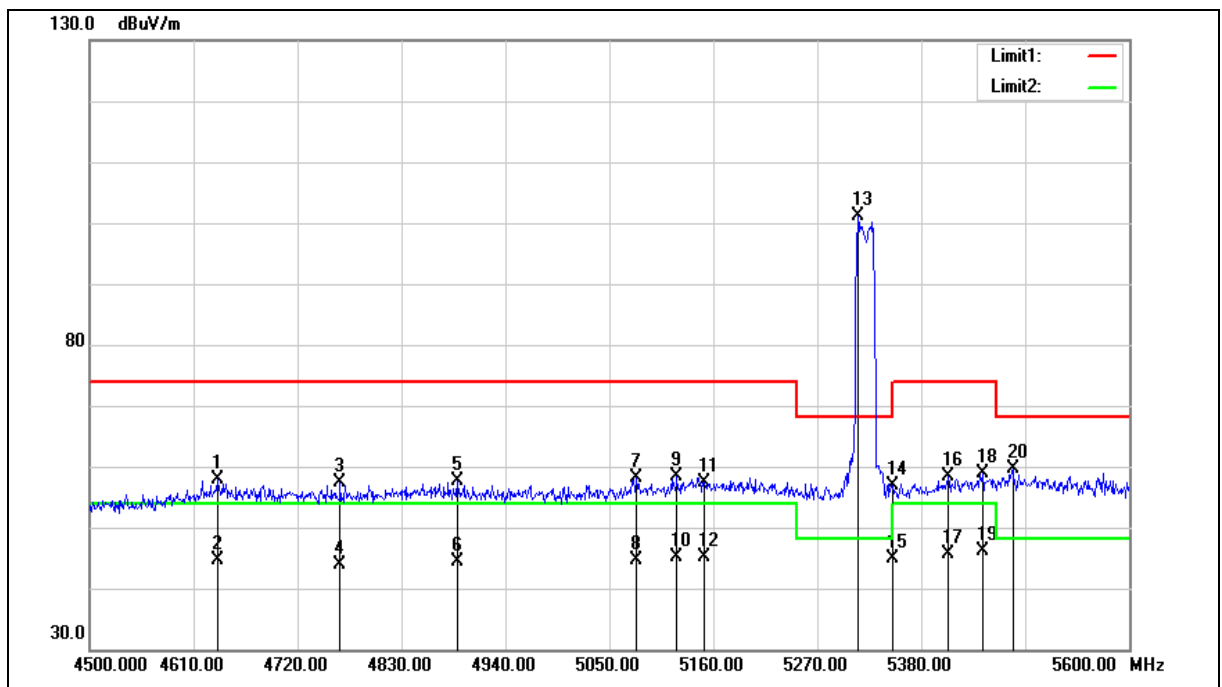

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.300	52.51	5.39	57.90	74.00	-16.10	peak
2	4635.300	39.34	5.39	44.73	54.00	-9.27	AVG
3	4765.100	51.57	5.79	57.36	74.00	-16.64	peak
4	4765.100	38.06	5.79	43.85	54.00	-10.15	AVG
5	4889.400	51.39	6.17	57.56	74.00	-16.44	peak
6	4889.400	38.31	6.17	44.48	54.00	-9.52	AVG
7	5078.600	51.35	6.73	58.08	74.00	-15.92	peak
8	5078.600	38.02	6.73	44.75	54.00	-9.25	AVG
9	5121.500	51.55	6.85	58.40	74.00	-15.60	peak
10	5121.500	38.33	6.85	45.18	54.00	-8.82	AVG
11	5150.000	50.38	6.94	57.32	74.00	-16.68	peak
12	5150.000	38.29	6.94	45.23	54.00	-8.77	AVG
13	5312.900	93.66	7.39	101.05	--	--	peak
14	5350.000	49.41	7.50	56.91	74.00	-17.09	peak
15	5350.000	37.41	7.50	44.91	54.00	-9.09	AVG
16	5408.600	50.76	7.68	58.44	74.00	-15.56	peak
17	5408.600	38.01	7.68	45.69	54.00	-8.31	AVG
18	5444.900	51.02	7.77	58.79	74.00	-15.21	peak
19	5444.900	38.38	7.77	46.15	54.00	-7.85	AVG
20	5476.800	51.75	7.87	59.62	68.20	-8.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

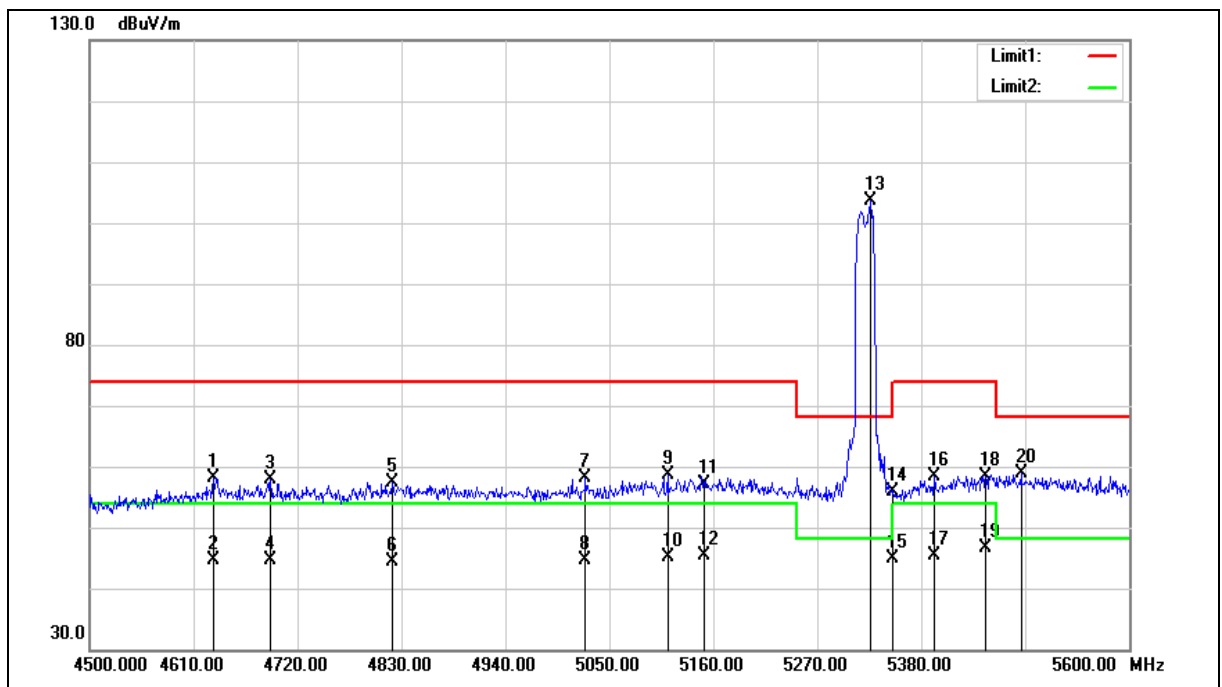

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4630.900	52.78	5.38	58.16	74.00	-15.84	peak
2	4630.900	39.30	5.38	44.68	54.00	-9.32	AVG
3	4691.400	52.35	5.56	57.91	74.00	-16.09	peak
4	4691.400	38.95	5.56	44.51	54.00	-9.49	AVG
5	4820.100	51.44	5.95	57.39	74.00	-16.61	peak
6	4820.100	38.52	5.95	44.47	54.00	-9.53	AVG
7	5024.700	51.62	6.57	58.19	74.00	-15.81	peak
8	5024.700	37.97	6.57	44.54	54.00	-9.46	AVG
9	5111.600	51.74	6.82	58.56	74.00	-15.44	peak
10	5111.600	38.25	6.82	45.07	54.00	-8.93	AVG
11	5150.000	50.13	6.94	57.07	74.00	-16.93	peak
12	5150.000	38.55	6.94	45.49	54.00	-8.51	AVG
13	5326.100	96.21	7.44	103.65	--	--	peak
14	5350.000	48.28	7.50	55.78	74.00	-18.22	peak
15	5350.000	37.47	7.50	44.97	54.00	-9.03	AVG
16	5394.300	50.65	7.63	58.28	74.00	-15.72	peak
17	5394.300	37.75	7.63	45.38	54.00	-8.62	AVG
18	5448.200	50.63	7.79	58.42	74.00	-15.58	peak
19	5448.200	38.73	7.79	46.52	54.00	-7.48	AVG
20	5485.600	51.02	7.89	58.91	68.20	-9.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

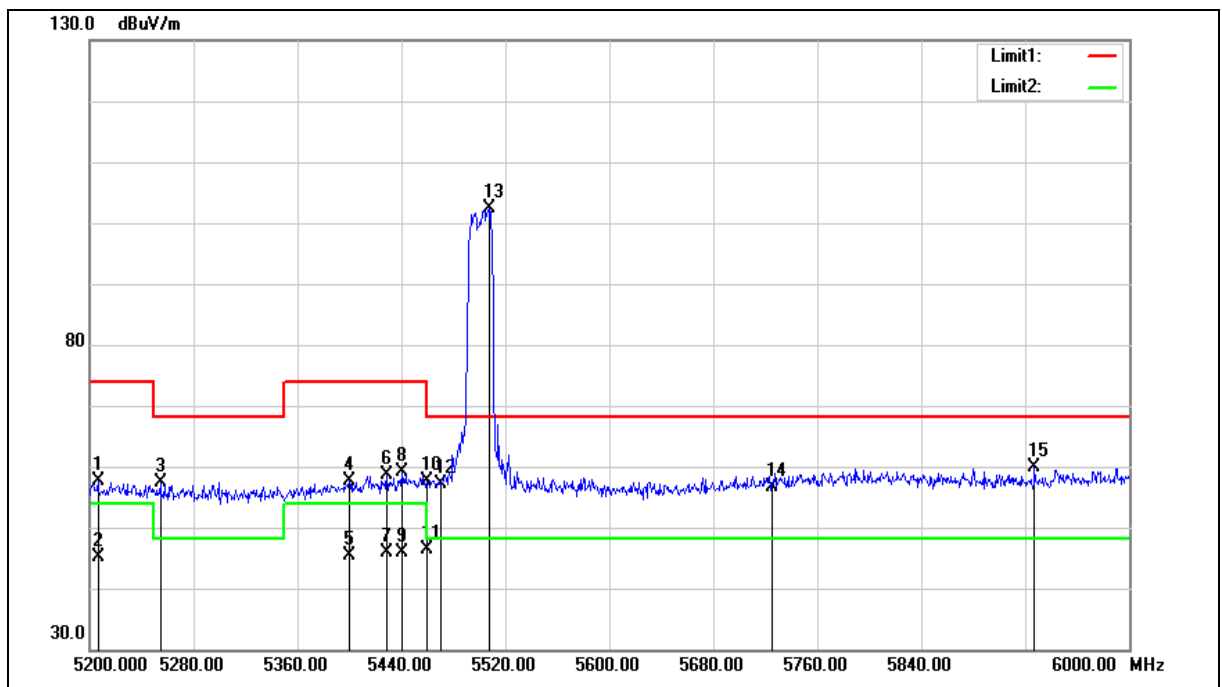

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5206.400	50.44	7.10	57.54	74.00	-16.46	peak
2	5206.400	37.94	7.10	45.04	54.00	-8.96	AVG
3	5254.400	50.18	7.23	57.41	68.20	-10.79	peak
4	5400.000	49.99	7.65	57.64	74.00	-16.36	peak
5	5400.000	37.67	7.65	45.32	54.00	-8.68	AVG
6	5428.800	50.95	7.73	58.68	74.00	-15.32	peak
7	5428.800	38.06	7.73	45.79	54.00	-8.21	AVG
8	5440.800	51.43	7.76	59.19	74.00	-14.81	peak
9	5440.800	38.24	7.76	46.00	54.00	-8.00	AVG
10	5460.000	49.92	7.82	57.74	74.00	-16.26	peak
11	5460.000	38.44	7.82	46.26	54.00	-7.74	AVG
12	5470.000	49.31	7.85	57.16	68.20	-11.04	peak
13	5507.200	94.35	7.95	102.30	--	--	peak
14	5725.000	48.30	8.39	56.69	68.20	-11.51	peak
15	5927.200	51.04	8.80	59.84	68.20	-8.36	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

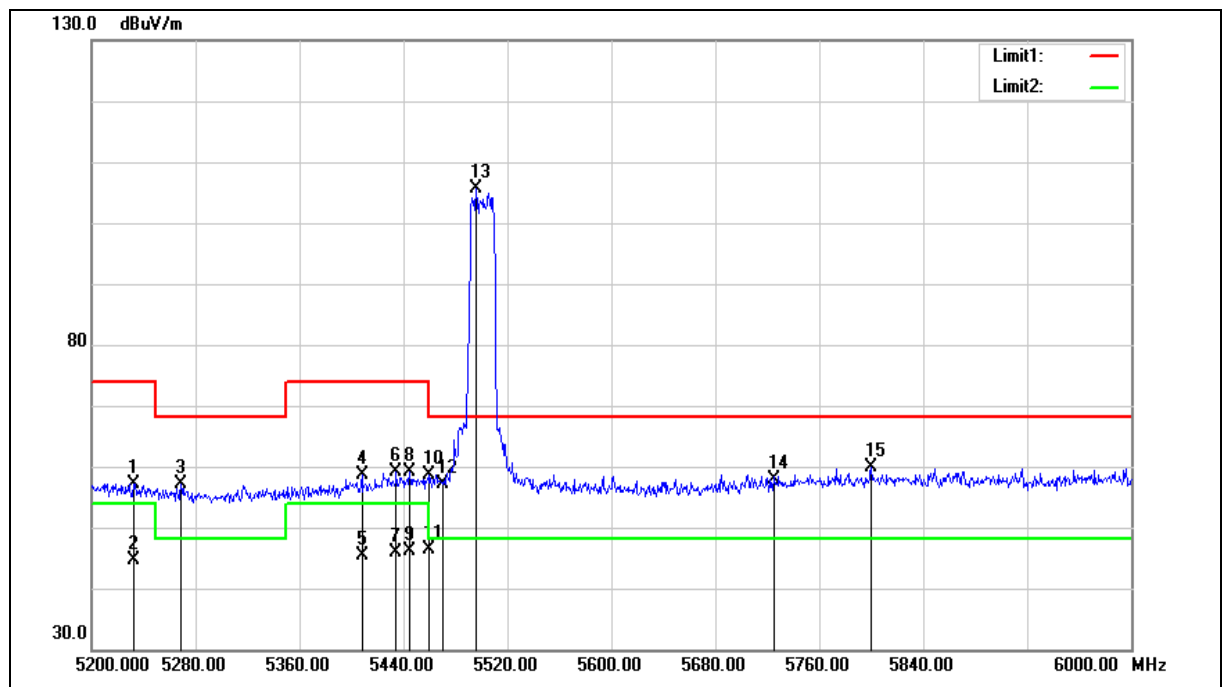

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5232.800	49.99	7.17	57.16	74.00	-16.84	peak
2	5232.800	37.52	7.17	44.69	54.00	-9.31	AVG
3	5268.800	49.89	7.27	57.16	68.20	-11.04	peak
4	5408.000	50.98	7.67	58.65	74.00	-15.35	peak
5	5408.000	37.81	7.67	45.48	54.00	-8.52	AVG
6	5434.400	51.43	7.74	59.17	74.00	-14.83	peak
7	5434.400	38.20	7.74	45.94	54.00	-8.06	AVG
8	5444.800	51.46	7.77	59.23	74.00	-14.77	peak
9	5444.800	38.34	7.77	46.11	54.00	-7.89	AVG
10	5460.000	50.81	7.82	58.63	74.00	-15.37	peak
11	5460.000	38.50	7.82	46.32	54.00	-7.68	AVG
12	5470.000	49.39	7.85	57.24	68.20	-10.96	peak
13	5496.000	97.74	7.92	105.66	--	--	peak
14	5725.000	49.56	8.39	57.95	68.20	-10.25	peak
15	5800.000	51.23	8.53	59.76	68.20	-8.44	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

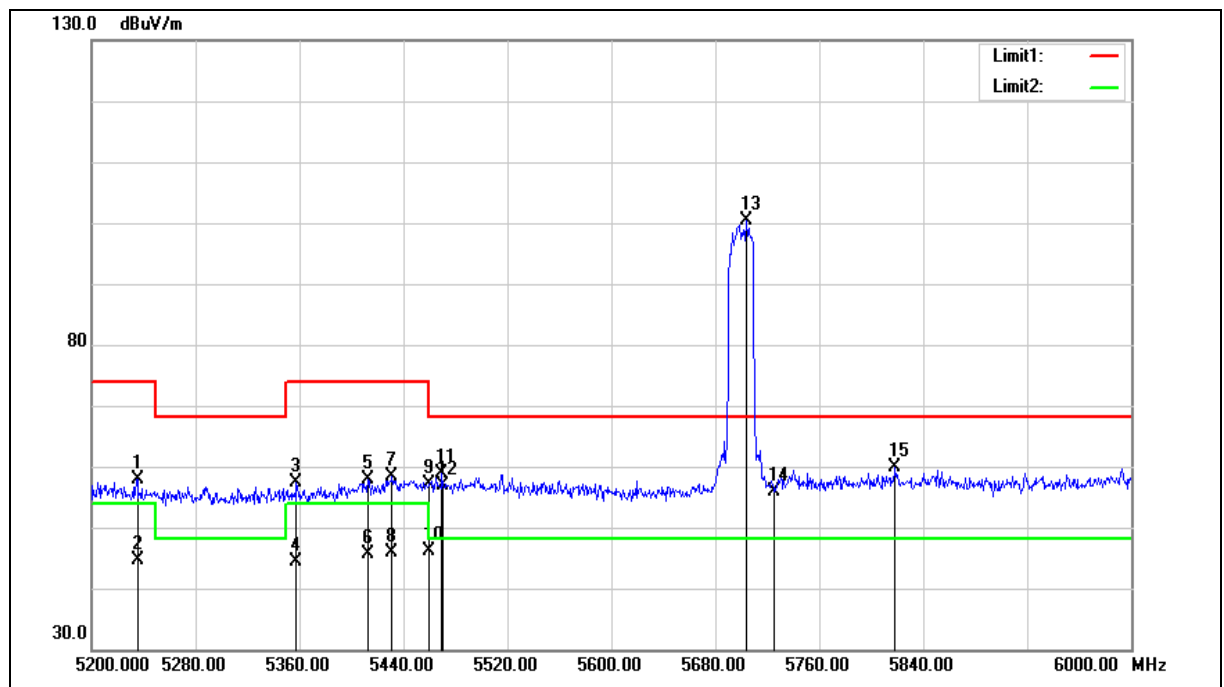

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5235.200	50.78	7.18	57.96	74.00	-16.04	peak
2	5235.200	37.35	7.18	44.53	54.00	-9.47	AVG
3	5357.600	49.84	7.52	57.36	74.00	-16.64	peak
4	5357.600	36.79	7.52	44.31	54.00	-9.69	AVG
5	5412.800	50.19	7.68	57.87	74.00	-16.13	peak
6	5412.800	37.91	7.68	45.59	54.00	-8.41	AVG
7	5431.200	50.57	7.74	58.31	74.00	-15.69	peak
8	5431.200	38.13	7.74	45.87	54.00	-8.13	AVG
9	5460.000	49.40	7.82	57.22	74.00	-16.78	peak
10	5460.000	38.34	7.82	46.16	54.00	-7.84	AVG
11	5469.600	50.91	7.85	58.76	68.20	-9.44	peak
12	5470.000	49.03	7.85	56.88	68.20	-11.32	peak
13	5704.000	92.09	8.34	100.43	--	--	peak
14	5725.000	47.42	8.39	55.81	68.20	-12.39	peak
15	5818.400	51.33	8.57	59.90	68.20	-8.30	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

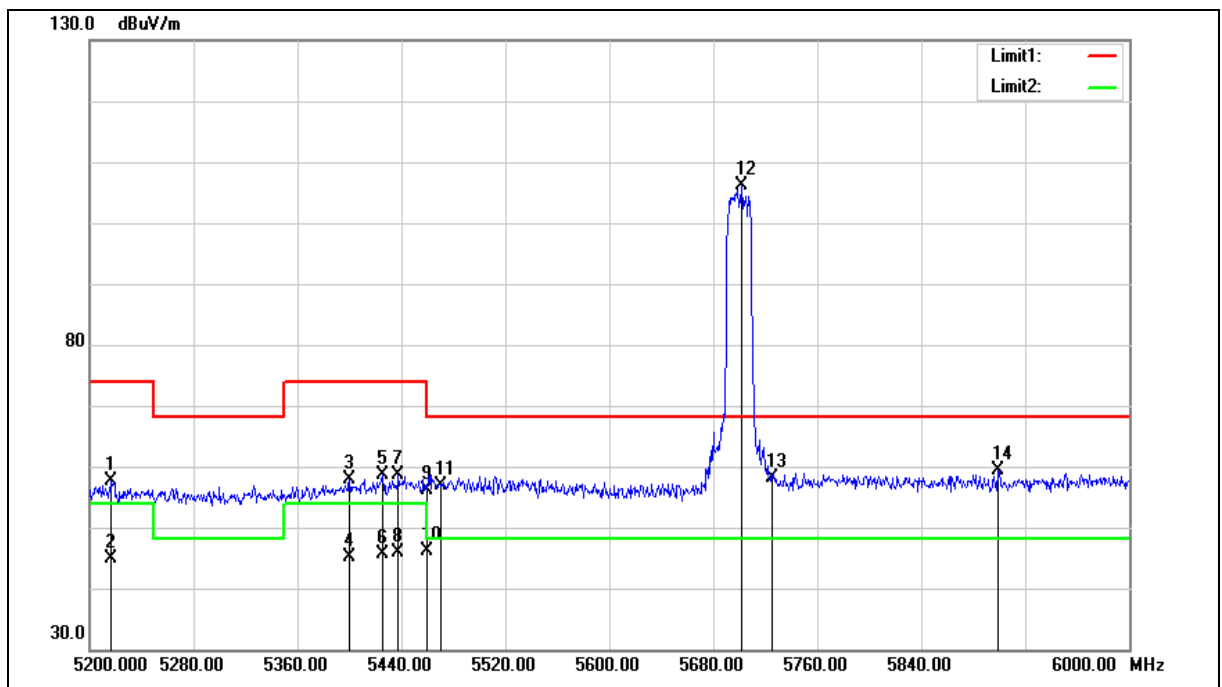

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5216.800	50.57	7.13	57.70	74.00	-16.30	peak
2	5216.800	37.65	7.13	44.78	54.00	-9.22	AVG
3	5400.000	50.34	7.65	57.99	74.00	-16.01	peak
4	5400.000	37.58	7.65	45.23	54.00	-8.77	AVG
5	5425.600	50.85	7.73	58.58	74.00	-15.42	peak
6	5425.600	37.96	7.73	45.69	54.00	-8.31	AVG
7	5437.600	50.84	7.76	58.60	74.00	-15.40	peak
8	5437.600	38.05	7.76	45.81	54.00	-8.19	AVG
9	5460.000	48.28	7.82	56.10	74.00	-17.90	peak
10	5460.000	38.33	7.82	46.15	54.00	-7.85	AVG
11	5470.000	49.07	7.85	56.92	68.20	-11.28	peak
12	5701.600	97.83	8.34	106.17	--	--	peak
13	5725.000	49.86	8.39	58.25	68.20	-9.95	peak
14	5899.200	50.70	8.74	59.44	68.20	-8.76	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

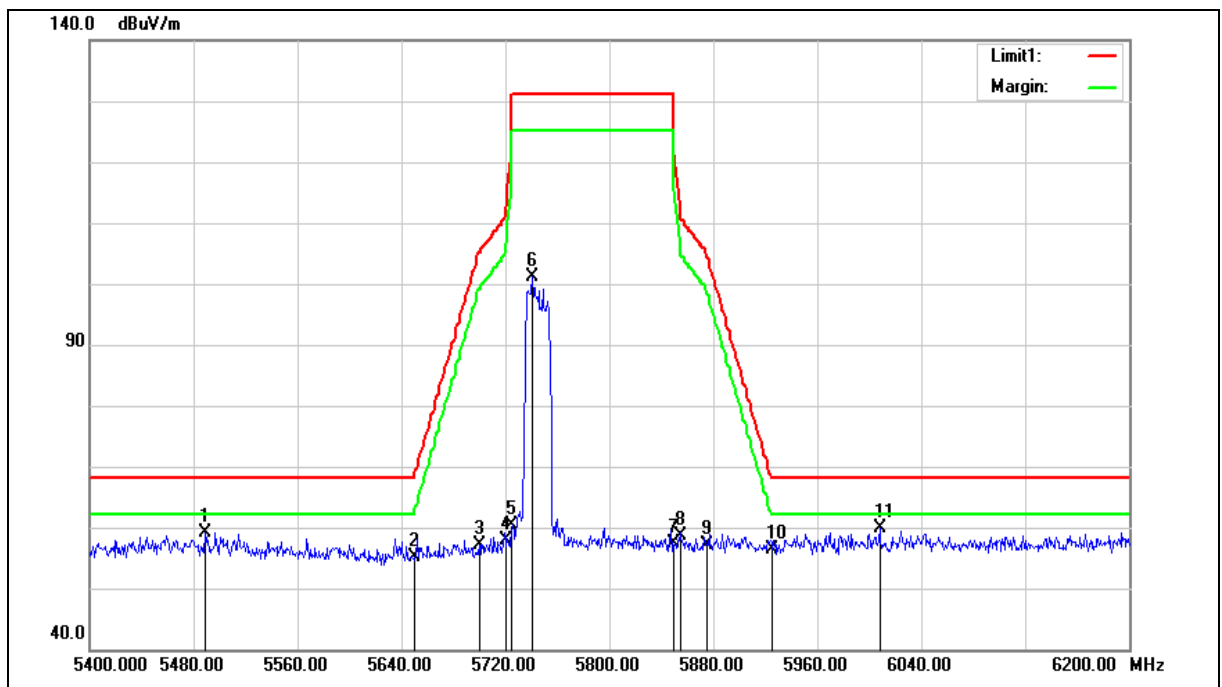

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5488.800	51.31	7.90	59.21	68.20	-8.99	peak
2	5650.000	46.98	8.24	55.22	68.20	-12.98	peak
3	5700.000	48.75	8.34	57.09	105.20	-48.11	peak
4	5720.000	49.46	8.38	57.84	110.80	-52.96	peak
5	5725.000	52.11	8.39	60.50	122.20	-61.70	peak
6	5740.800	92.76	8.42	101.18	--	--	peak
7	5850.000	48.63	8.63	57.26	122.20	-64.94	peak
8	5855.000	50.05	8.64	58.69	110.80	-52.11	peak
9	5875.000	48.47	8.69	57.16	105.20	-48.04	peak
10	5925.000	47.52	8.79	56.31	68.20	-11.89	peak
11	6008.000	50.92	8.97	59.89	68.20	-8.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

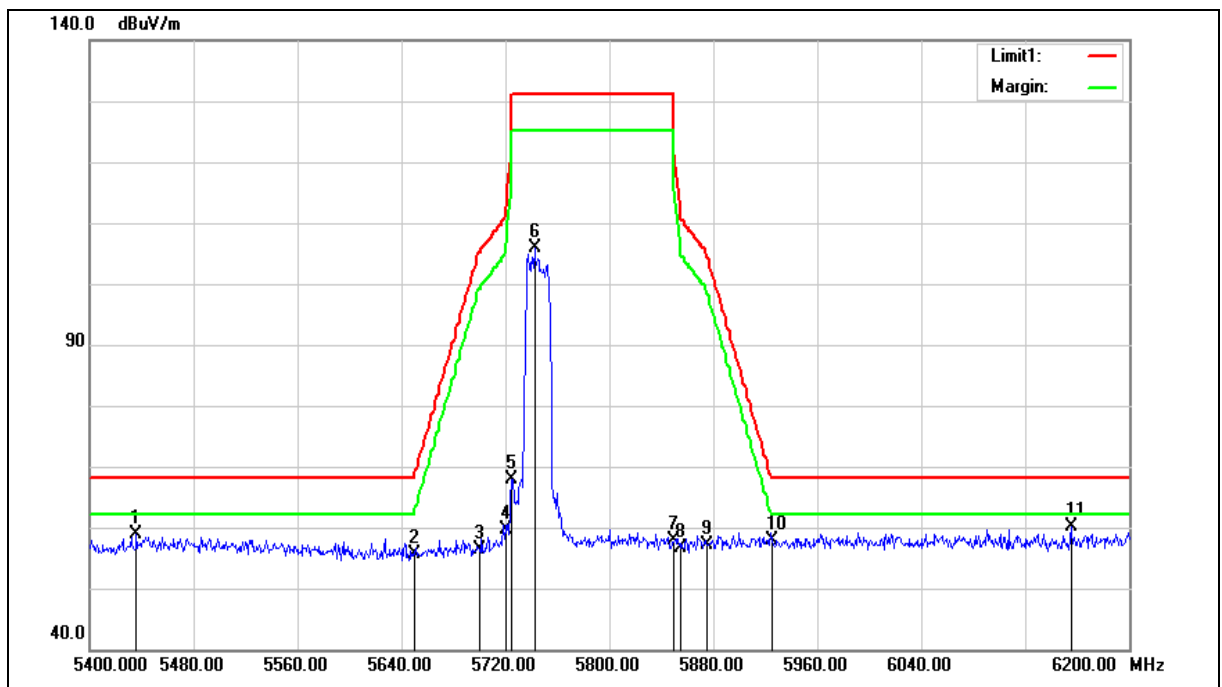

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5436.000	51.02	7.75	58.77	68.20	-9.43	peak
2	5650.000	47.42	8.24	55.66	68.20	-12.54	peak
3	5700.000	48.13	8.34	56.47	105.20	-48.73	peak
4	5720.000	51.28	8.38	59.66	110.80	-51.14	peak
5	5725.000	59.51	8.39	67.90	122.20	-54.30	peak
6	5742.400	97.47	8.42	105.89	--	--	peak
7	5850.000	49.17	8.63	57.80	122.20	-64.40	peak
8	5855.000	48.10	8.64	56.74	110.80	-54.06	peak
9	5875.000	48.55	8.69	57.24	105.20	-47.96	peak
10	5925.000	48.97	8.79	57.76	68.20	-10.44	peak
11	6155.200	50.69	9.40	60.09	68.20	-8.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

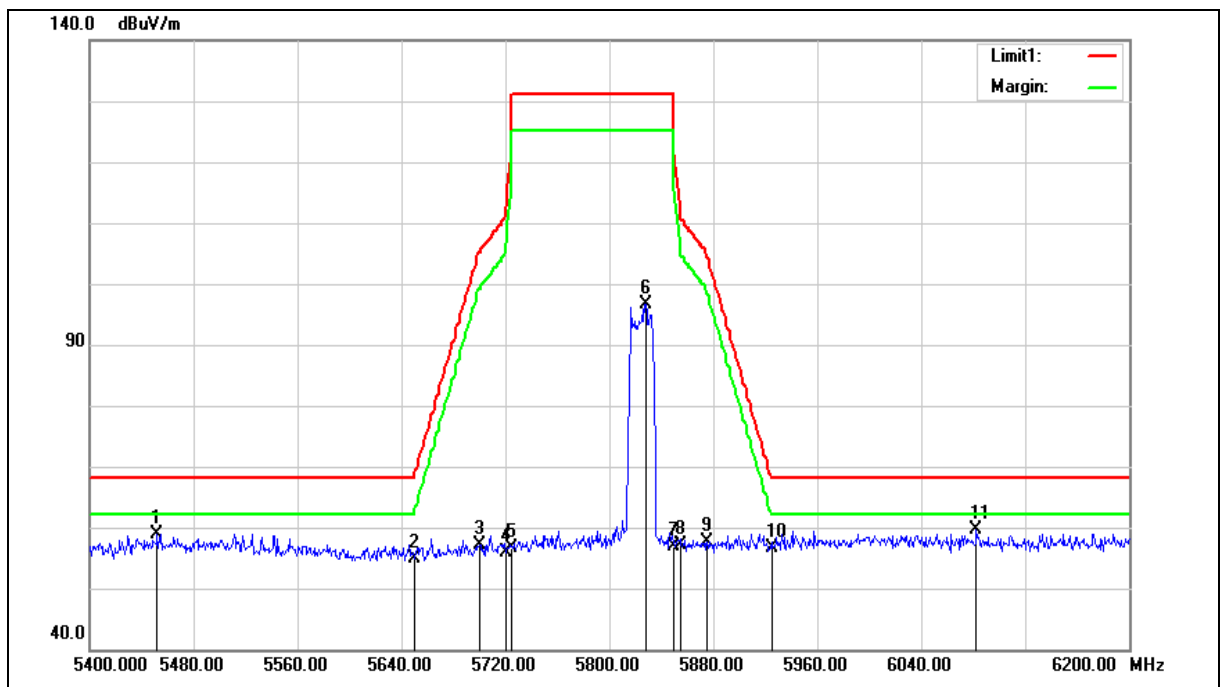

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.000	51.20	7.79	58.99	68.20	-9.21	peak
2	5650.000	46.54	8.24	54.78	68.20	-13.42	peak
3	5700.000	48.73	8.34	57.07	105.20	-48.13	peak
4	5720.000	47.60	8.38	55.98	110.80	-54.82	peak
5	5725.000	48.27	8.39	56.66	122.20	-65.54	peak
6	5828.000	88.11	8.59	96.70	--	--	peak
7	5850.000	48.18	8.63	56.81	122.20	-65.39	peak
8	5855.000	48.45	8.64	57.09	110.80	-53.71	peak
9	5875.000	48.85	8.69	57.54	105.20	-47.66	peak
10	5925.000	47.73	8.79	56.52	68.20	-11.68	peak
11	6082.400	50.50	9.19	59.69	68.20	-8.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

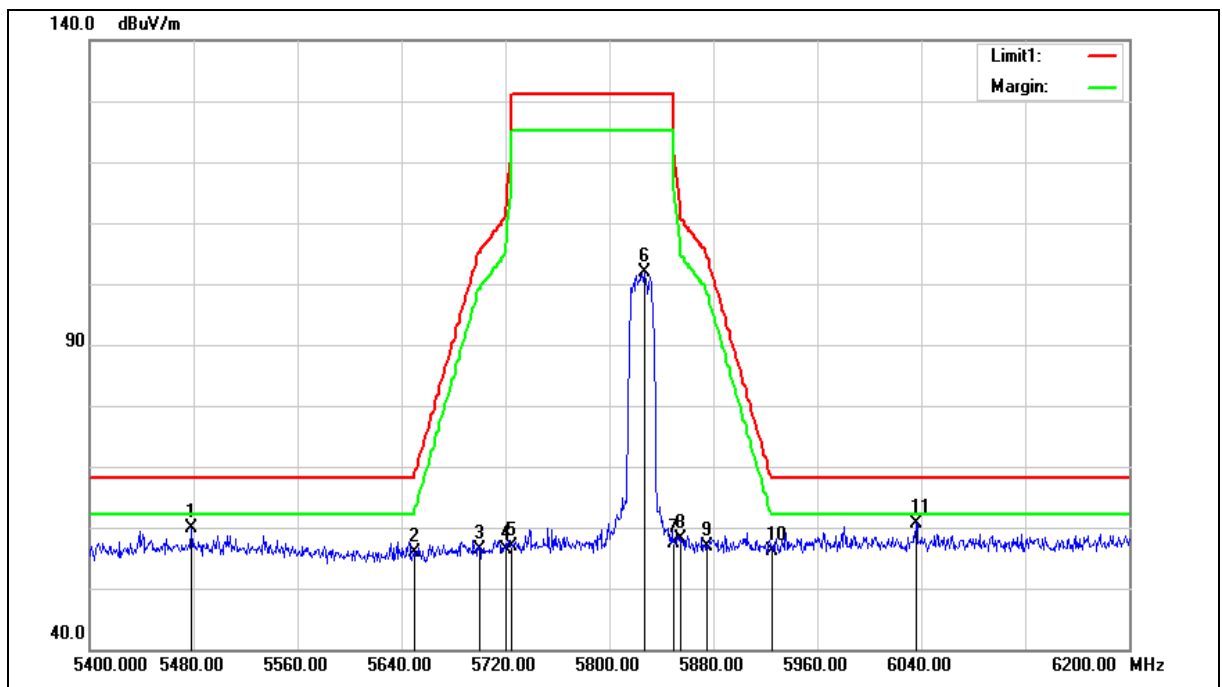

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5478.400	51.92	7.87	59.79	68.20	-8.41	peak
2	5650.000	47.54	8.24	55.78	68.20	-12.42	peak
3	5700.000	48.01	8.34	56.35	105.20	-48.85	peak
4	5720.000	47.92	8.38	56.30	110.80	-54.50	peak
5	5725.000	48.49	8.39	56.88	122.20	-65.32	peak
6	5827.200	93.23	8.59	101.82	--	--	peak
7	5850.000	48.86	8.63	57.49	122.20	-64.71	peak
8	5855.000	49.60	8.64	58.24	110.80	-52.56	peak
9	5875.000	48.19	8.69	56.88	105.20	-48.32	peak
10	5925.000	47.44	8.79	56.23	68.20	-11.97	peak
11	6036.000	51.68	9.05	60.73	68.20	-7.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

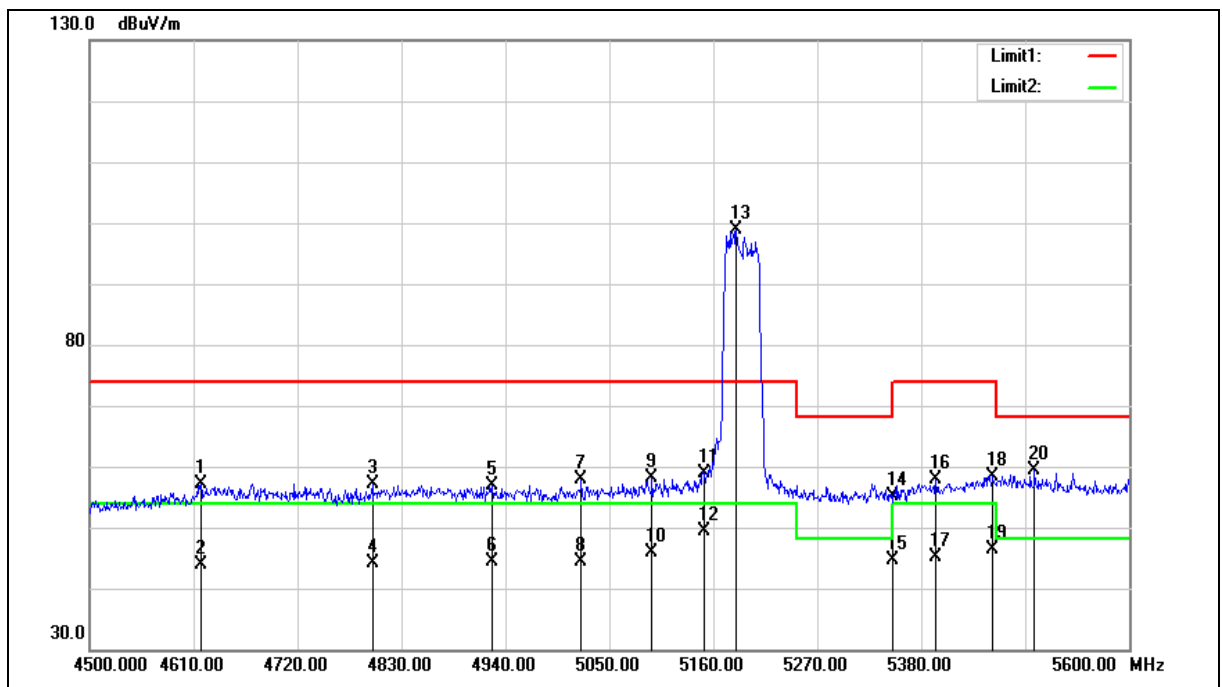

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4617.700	51.88	5.34	57.22	74.00	-16.78	peak
2	4617.700	38.61	5.34	43.95	54.00	-10.05	AVG
3	4799.200	51.30	5.90	57.20	74.00	-16.80	peak
4	4799.200	38.19	5.90	44.09	54.00	-9.91	AVG
5	4925.700	50.58	6.29	56.87	74.00	-17.13	peak
6	4925.700	38.02	6.29	44.31	54.00	-9.69	AVG
7	5020.300	51.22	6.57	57.79	74.00	-16.21	peak
8	5020.300	37.91	6.57	44.48	54.00	-9.52	AVG
9	5095.100	51.41	6.78	58.19	74.00	-15.81	peak
10	5095.100	39.11	6.78	45.89	54.00	-8.11	AVG
11	5150.000	51.98	6.94	58.92	74.00	-15.08	peak
12	5150.000	42.47	6.94	49.41	54.00	-4.59	AVG
13	5184.200	91.79	7.03	98.82	--	--	peak
14	5350.000	47.63	7.50	55.13	74.00	-18.87	peak
15	5350.000	37.07	7.50	44.57	54.00	-9.43	AVG
16	5395.400	50.36	7.64	58.00	74.00	-16.00	peak
17	5395.400	37.53	7.64	45.17	54.00	-8.83	AVG
18	5455.900	50.67	7.81	58.48	74.00	-15.52	peak
19	5455.900	38.58	7.81	46.39	54.00	-7.61	AVG
20	5499.900	51.48	7.93	59.41	68.20	-8.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

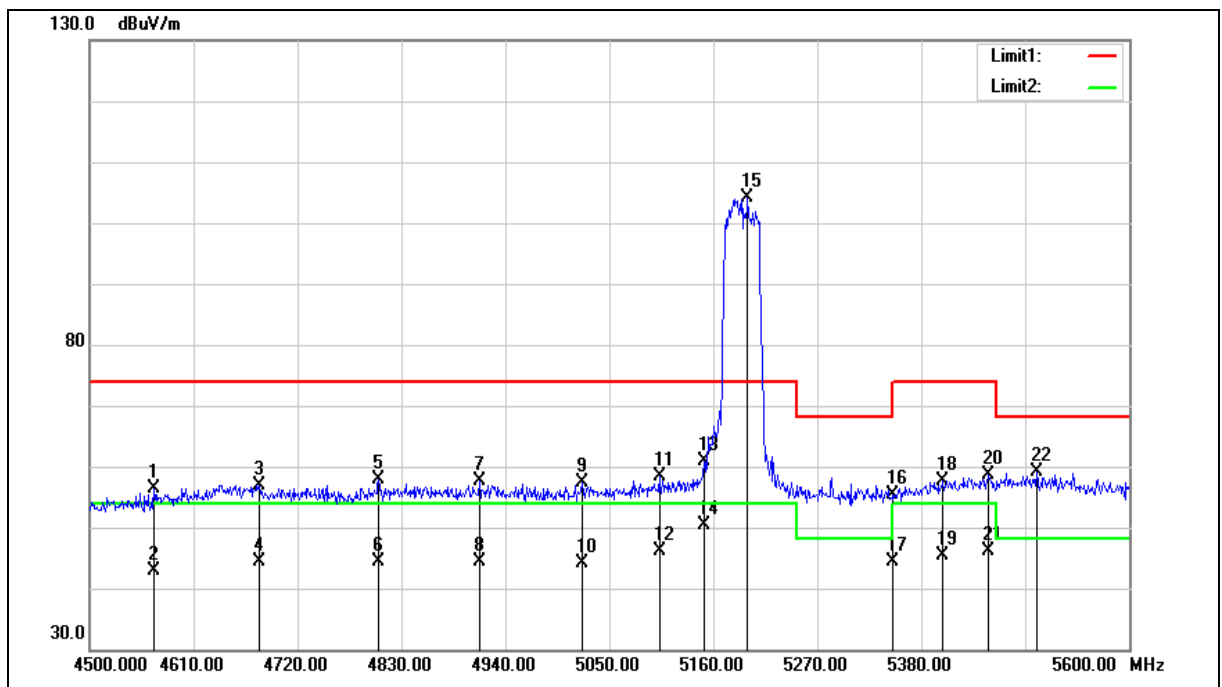

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4568.200	51.12	5.19	56.31	74.00	-17.69	peak
2	4568.200	37.63	5.19	42.82	54.00	-11.18	AVG
3	4679.300	51.39	5.53	56.92	74.00	-17.08	peak
4	4679.300	38.81	5.53	44.34	54.00	-9.66	AVG
5	4805.800	52.05	5.91	57.96	74.00	-16.04	peak
6	4805.800	38.47	5.91	44.38	54.00	-9.62	AVG
7	4912.500	51.29	6.25	57.54	74.00	-16.46	peak
8	4912.500	38.06	6.25	44.31	54.00	-9.69	AVG
9	5021.400	50.93	6.57	57.50	74.00	-16.50	peak
10	5021.400	37.67	6.57	44.24	54.00	-9.76	AVG
11	5102.800	51.59	6.80	58.39	74.00	-15.61	peak
12	5102.800	39.31	6.80	46.11	54.00	-7.89	AVG
13	5150.000	53.95	6.94	60.89	74.00	-13.11	peak
14	5150.000	43.39	6.94	50.33	54.00	-3.67	AVG
15	5196.300	97.01	7.07	104.08	--	--	peak
16	5350.000	47.96	7.50	55.46	74.00	-18.54	peak
17	5350.000	36.89	7.50	44.39	54.00	-9.61	AVG
18	5403.100	50.01	7.66	57.67	74.00	-16.33	peak
19	5403.100	37.75	7.66	45.41	54.00	-8.59	AVG
20	5451.500	50.80	7.79	58.59	74.00	-15.41	peak
21	5451.500	38.29	7.79	46.08	54.00	-7.92	AVG
22	5502.100	51.14	7.93	59.07	68.20	-9.13	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

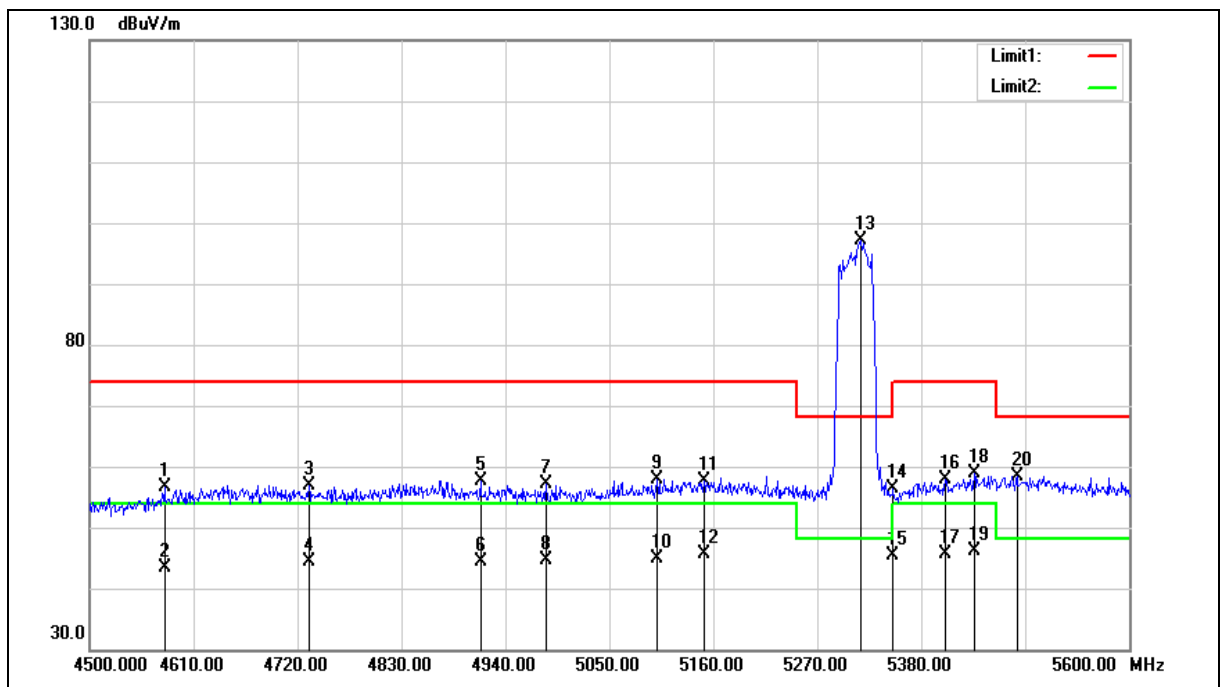

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4579.200	51.39	5.22	56.61	74.00	-17.39	peak
2	4579.200	38.20	5.22	43.42	54.00	-10.58	AVG
3	4732.100	51.24	5.69	56.93	74.00	-17.07	peak
4	4732.100	38.71	5.69	44.40	54.00	-9.60	AVG
5	4913.600	51.38	6.25	57.63	74.00	-16.37	peak
6	4913.600	38.06	6.25	44.31	54.00	-9.69	AVG
7	4982.900	50.64	6.46	57.10	74.00	-16.90	peak
8	4982.900	38.06	6.46	44.52	54.00	-9.48	AVG
9	5100.600	51.19	6.79	57.98	74.00	-16.02	peak
10	5100.600	38.12	6.79	44.91	54.00	-9.09	AVG
11	5150.000	50.60	6.94	57.54	74.00	-16.46	peak
12	5150.000	38.68	6.94	45.62	54.00	-8.38	AVG
13	5316.200	89.69	7.41	97.10	--	--	peak
14	5350.000	48.97	7.50	56.47	74.00	-17.53	peak
15	5350.000	37.91	7.50	45.41	54.00	-8.59	AVG
16	5405.300	50.25	7.67	57.92	74.00	-16.08	peak
17	5405.300	37.88	7.67	45.55	54.00	-8.45	AVG
18	5436.100	51.20	7.75	58.95	74.00	-15.05	peak
19	5436.100	38.28	7.75	46.03	54.00	-7.97	AVG
20	5481.200	50.46	7.88	58.34	68.20	-9.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

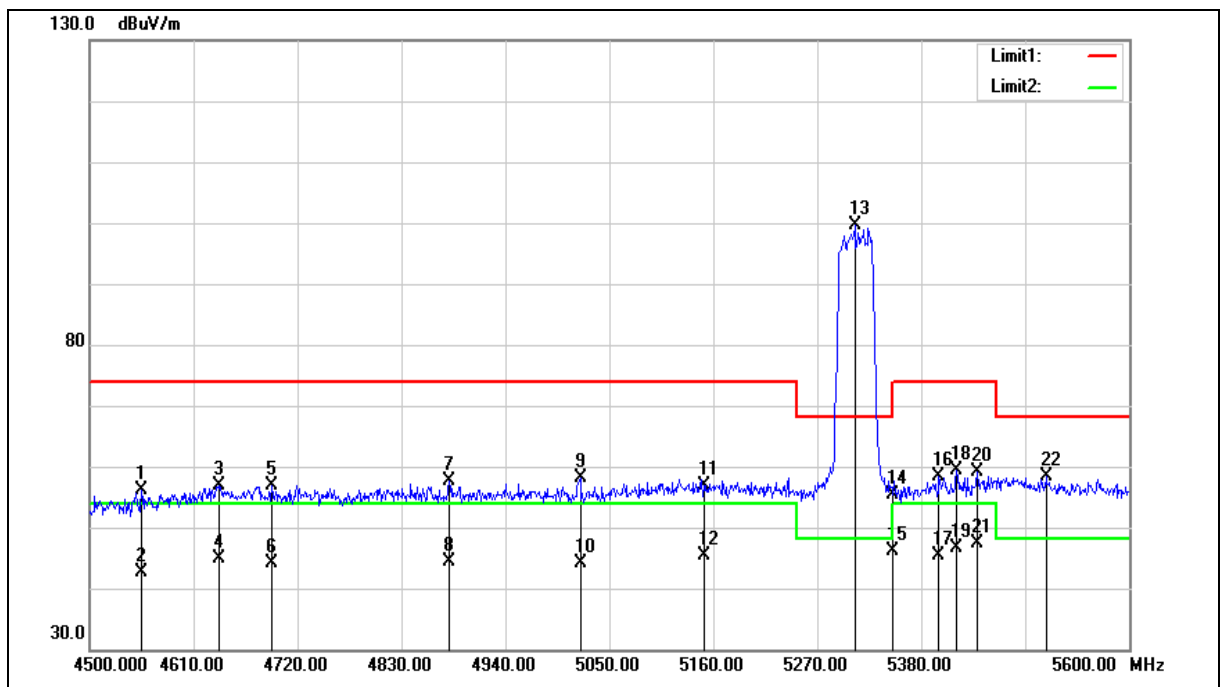

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4555.000	50.94	5.15	56.09	74.00	-17.91	peak
2	4555.000	37.44	5.15	42.59	54.00	-11.41	AVG
3	4637.500	51.37	5.40	56.77	74.00	-17.23	peak
4	4637.500	39.38	5.40	44.78	54.00	-9.22	AVG
5	4692.500	51.38	5.56	56.94	74.00	-17.06	peak
6	4692.500	38.48	5.56	44.04	54.00	-9.96	AVG
7	4880.600	51.42	6.15	57.57	74.00	-16.43	peak
8	4880.600	38.28	6.15	44.43	54.00	-9.57	AVG
9	5019.200	51.54	6.56	58.10	74.00	-15.90	peak
10	5019.200	37.61	6.56	44.17	54.00	-9.83	AVG
11	5150.000	49.84	6.94	56.78	74.00	-17.22	peak
12	5150.000	38.49	6.94	45.43	54.00	-8.57	AVG
13	5309.600	92.16	7.39	99.55	--	--	peak
14	5350.000	47.99	7.50	55.49	74.00	-18.51	peak
15	5350.000	38.51	7.50	46.01	54.00	-7.99	AVG
16	5398.700	50.84	7.65	58.49	74.00	-15.51	peak
17	5398.700	37.63	7.65	45.28	54.00	-8.72	AVG
18	5417.400	51.63	7.70	59.33	74.00	-14.67	peak
19	5417.400	39.02	7.70	46.72	54.00	-7.28	AVG
20	5439.400	51.40	7.76	59.16	74.00	-14.84	peak
21	5439.400	39.59	7.76	47.35	54.00	-6.65	AVG
22	5512.000	50.41	7.95	58.36	68.20	-9.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

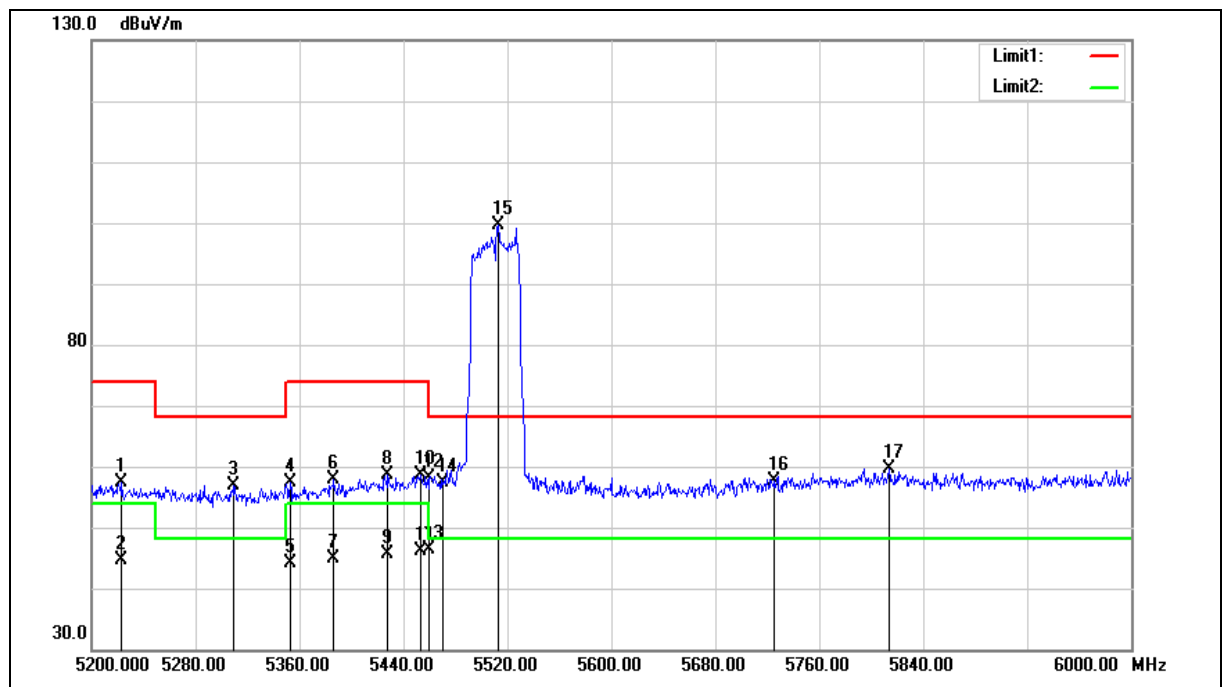

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5223.200	50.20	7.14	57.34	74.00	-16.66	peak
2	5223.200	37.58	7.14	44.72	54.00	-9.28	AVG
3	5309.600	49.59	7.39	56.98	68.20	-11.22	peak
4	5352.800	49.75	7.51	57.26	74.00	-16.74	peak
5	5352.800	36.64	7.51	44.15	54.00	-9.85	AVG
6	5386.400	50.30	7.62	57.92	74.00	-16.08	peak
7	5386.400	37.31	7.62	44.93	54.00	-9.07	AVG
8	5428.000	50.94	7.73	58.67	74.00	-15.33	peak
9	5428.000	38.02	7.73	45.75	54.00	-8.25	AVG
10	5453.600	50.91	7.80	58.71	74.00	-15.29	peak
11	5453.600	38.30	7.80	46.10	54.00	-7.90	AVG
12	5460.000	50.26	7.82	58.08	74.00	-15.92	peak
13	5460.000	38.65	7.82	46.47	54.00	-7.53	AVG
14	5470.000	49.54	7.85	57.39	68.20	-10.81	peak
15	5512.800	91.65	7.95	99.60	--	--	peak
16	5725.000	49.25	8.39	57.64	68.20	-10.56	peak
17	5813.600	51.00	8.56	59.56	68.20	-8.64	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

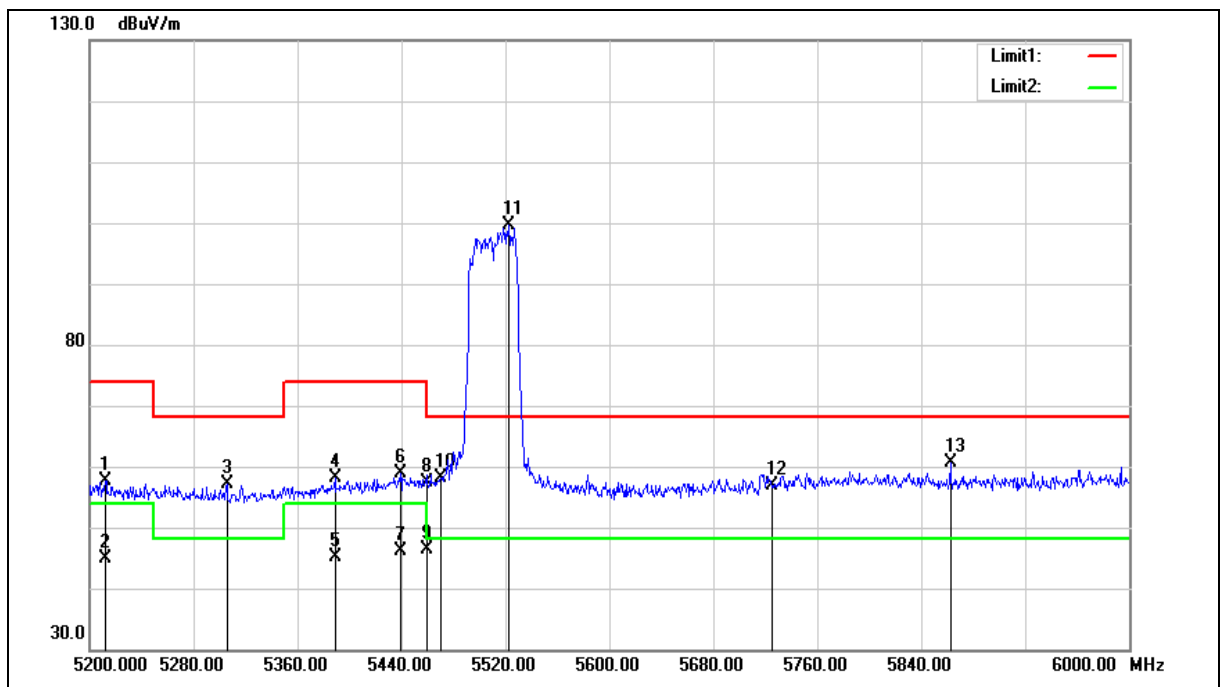

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	50.51	7.11	57.62	74.00	-16.38	peak
2	5212.000	37.79	7.11	44.90	54.00	-9.10	AVG
3	5305.600	49.64	7.38	57.02	68.20	-11.18	peak
4	5388.800	50.51	7.62	58.13	74.00	-15.87	peak
5	5388.800	37.41	7.62	45.03	54.00	-8.97	AVG
6	5439.200	51.16	7.76	58.92	74.00	-15.08	peak
7	5439.200	38.34	7.76	46.10	54.00	-7.90	AVG
8	5460.000	49.56	7.82	57.38	74.00	-16.62	peak
9	5460.000	38.60	7.82	46.42	54.00	-7.58	AVG
10	5470.000	50.29	7.85	58.14	68.20	-10.06	peak
11	5522.400	91.62	7.97	99.59	--	--	peak
12	5725.000	48.46	8.39	56.85	68.20	-11.35	peak
13	5862.400	52.00	8.66	60.66	68.20	-7.54	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

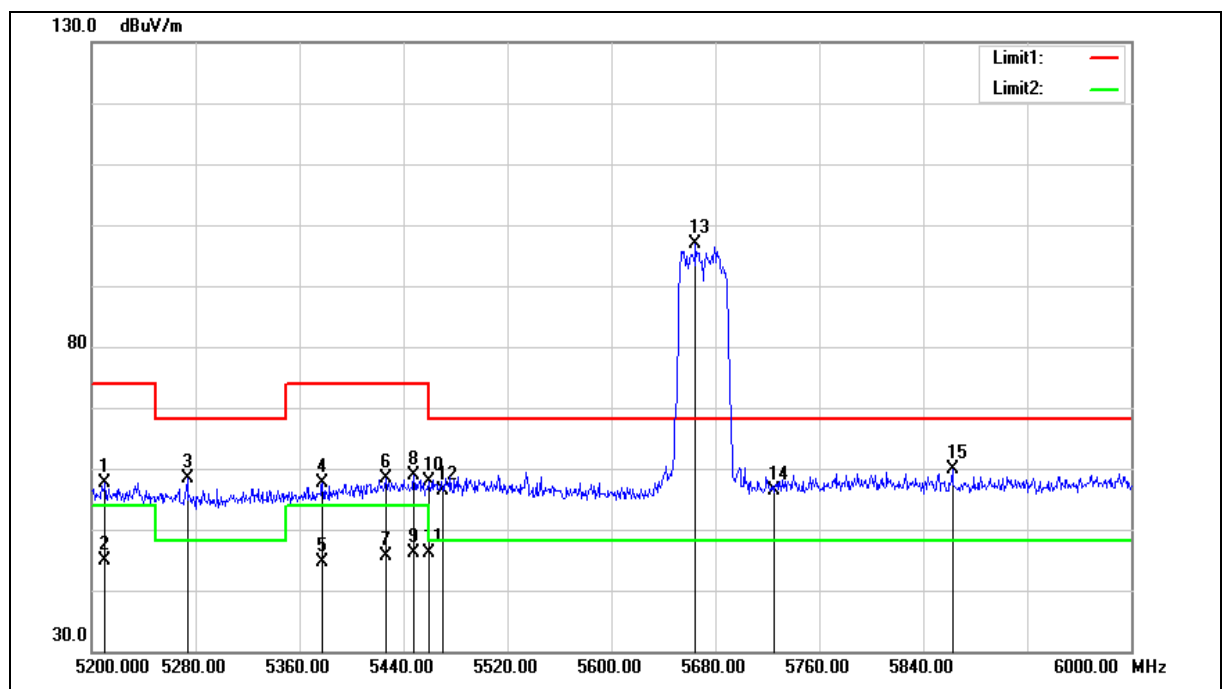

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5210.400	50.57	7.11	57.68	74.00	-16.32	peak
2	5210.400	37.78	7.11	44.89	54.00	-9.11	AVG
3	5273.600	51.10	7.28	58.38	68.20	-9.82	peak
4	5377.600	50.11	7.59	57.70	74.00	-16.30	peak
5	5377.600	37.11	7.59	44.70	54.00	-9.30	AVG
6	5426.400	50.57	7.73	58.30	74.00	-15.70	peak
7	5426.400	37.99	7.73	45.72	54.00	-8.28	AVG
8	5448.000	51.18	7.79	58.97	74.00	-15.03	peak
9	5448.000	38.27	7.79	46.06	54.00	-7.94	AVG
10	5460.000	50.17	7.82	57.99	74.00	-16.01	peak
11	5460.000	38.33	7.82	46.15	54.00	-7.85	AVG
12	5470.000	48.64	7.85	56.49	68.20	-11.71	peak
13	5664.800	88.57	8.26	96.83	--	--	peak
14	5725.000	48.10	8.39	56.49	68.20	-11.71	peak
15	5862.400	51.17	8.66	59.83	68.20	-8.37	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

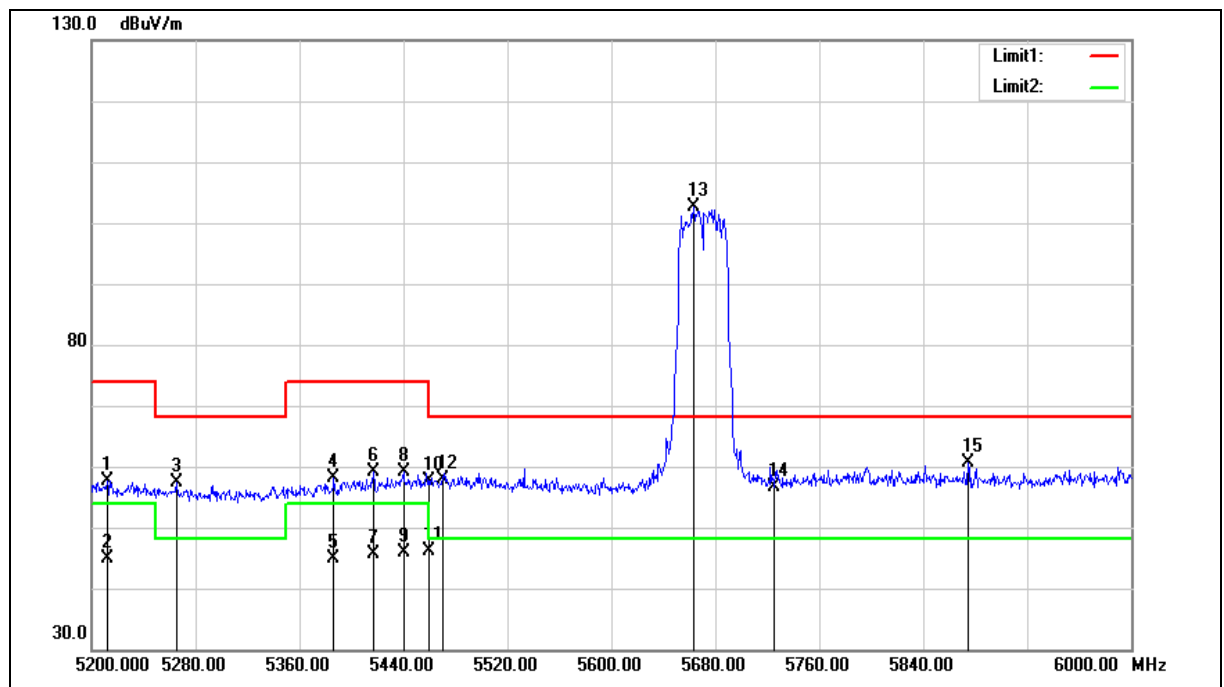

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	50.50	7.11	57.61	74.00	-16.39	peak
2	5212.000	37.75	7.11	44.86	54.00	-9.14	AVG
3	5265.600	50.06	7.27	57.33	68.20	-10.87	peak
4	5386.400	50.43	7.62	58.05	74.00	-15.95	peak
5	5386.400	37.28	7.62	44.90	54.00	-9.10	AVG
6	5416.800	51.42	7.70	59.12	74.00	-14.88	peak
7	5416.800	37.88	7.70	45.58	54.00	-8.42	AVG
8	5440.000	51.34	7.76	59.10	74.00	-14.90	peak
9	5440.000	38.16	7.76	45.92	54.00	-8.08	AVG
10	5460.000	49.75	7.82	57.57	74.00	-16.43	peak
11	5460.000	38.35	7.82	46.17	54.00	-7.83	AVG
12	5470.000	50.07	7.85	57.92	68.20	-10.28	peak
13	5663.200	94.30	8.26	102.56	--	--	peak
14	5725.000	48.23	8.39	56.62	68.20	-11.58	peak
15	5874.400	51.97	8.68	60.65	68.20	-7.55	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

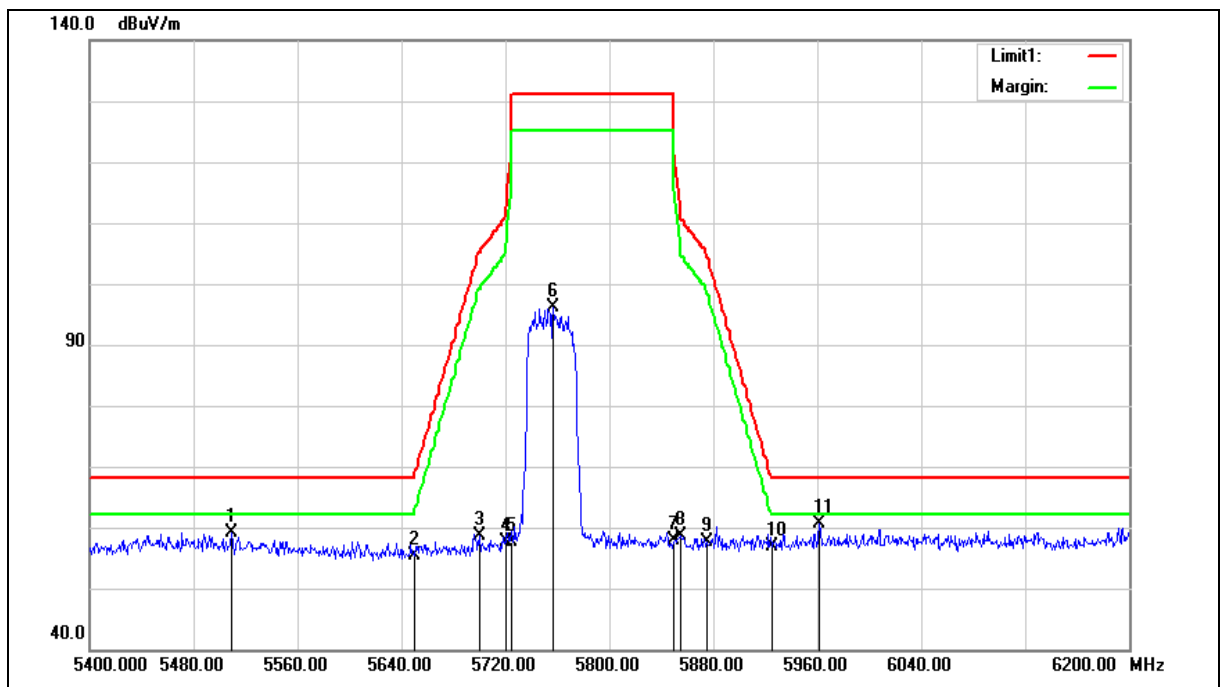

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5509.600	51.22	7.95	59.17	68.20	-9.03	peak
2	5650.000	47.19	8.24	55.43	68.20	-12.77	peak
3	5700.000	50.26	8.34	58.60	105.20	-46.60	peak
4	5720.000	49.31	8.38	57.69	110.80	-53.11	peak
5	5725.000	49.22	8.39	57.61	122.20	-64.59	peak
6	5756.800	87.66	8.45	96.11	--	--	peak
7	5850.000	49.32	8.63	57.95	122.20	-64.25	peak
8	5855.000	49.87	8.64	58.51	110.80	-52.29	peak
9	5875.000	49.02	8.69	57.71	105.20	-47.49	peak
10	5925.000	48.05	8.79	56.84	68.20	-11.36	peak
11	5961.600	51.69	8.86	60.55	68.20	-7.65	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

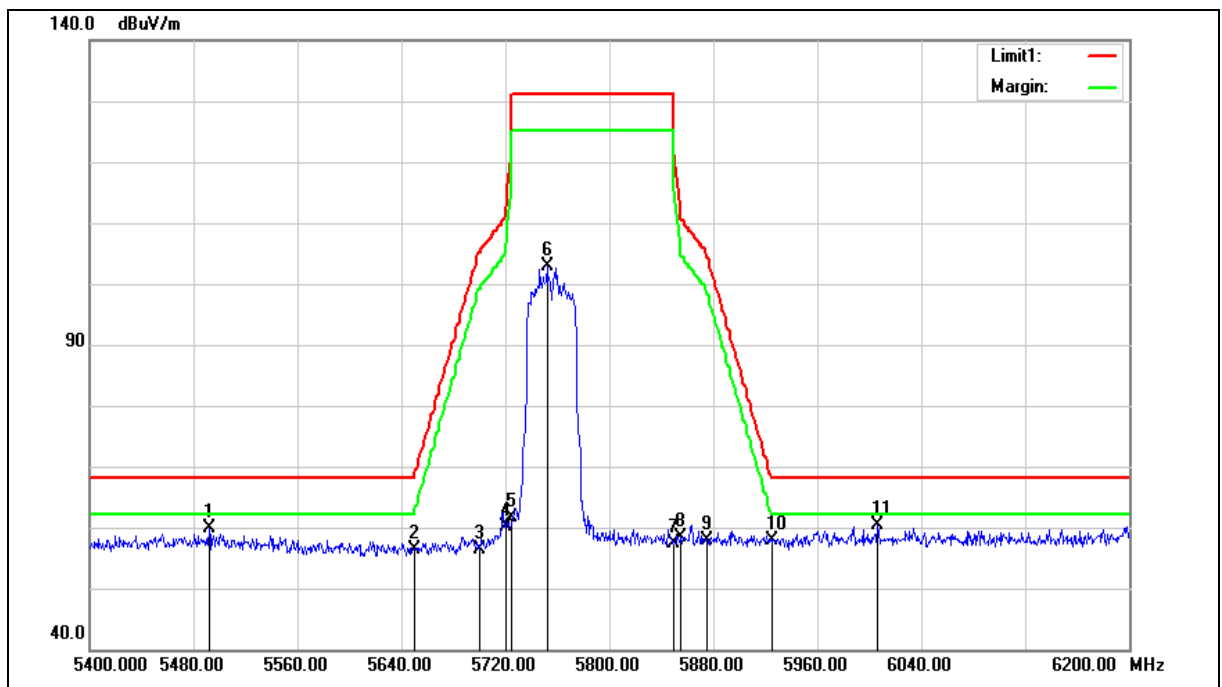

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5492.000	51.97	7.91	59.88	68.20	-8.32	peak
2	5650.000	48.02	8.24	56.26	68.20	-11.94	peak
3	5700.000	47.99	8.34	56.33	105.20	-48.87	peak
4	5720.000	51.84	8.38	60.22	110.80	-50.58	peak
5	5725.000	53.26	8.39	61.65	122.20	-60.55	peak
6	5752.000	94.46	8.44	102.90	--	--	peak
7	5850.000	48.84	8.63	57.47	122.20	-64.73	peak
8	5855.000	49.72	8.64	58.36	110.80	-52.44	peak
9	5875.000	49.11	8.69	57.80	105.20	-47.40	peak
10	5925.000	49.10	8.79	57.89	68.20	-10.31	peak
11	6006.400	51.42	8.96	60.38	68.20	-7.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

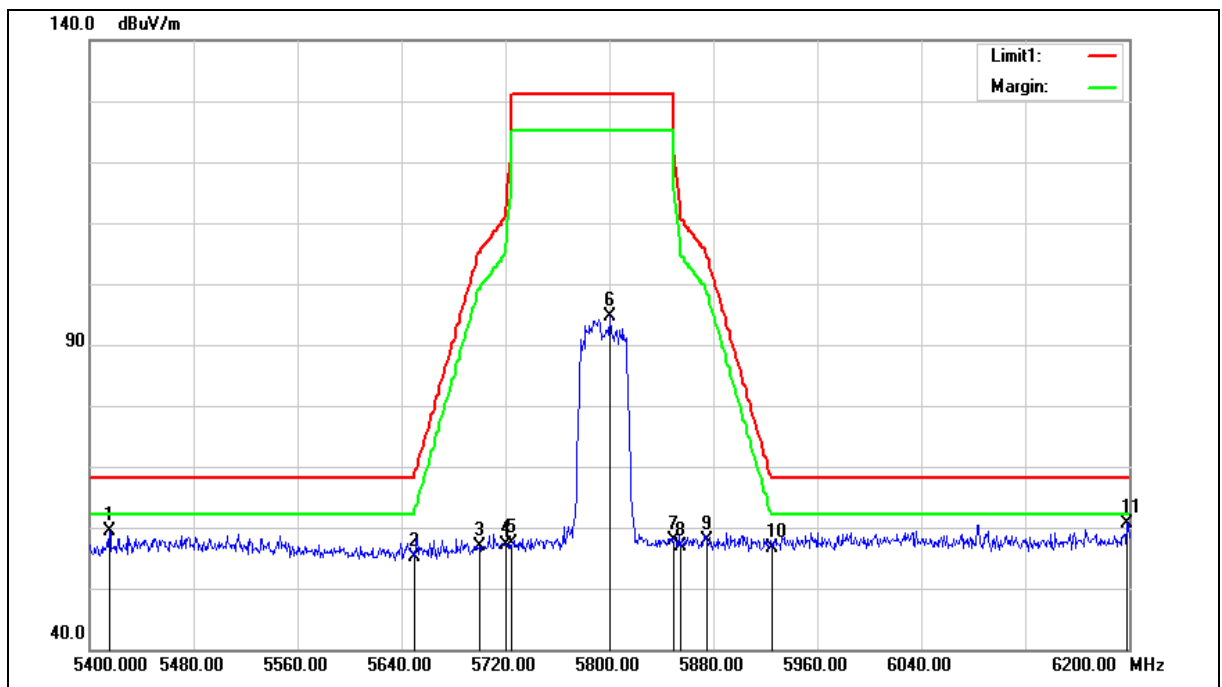

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5415.200	51.63	7.70	59.33	68.20	-8.87	peak
2	5650.000	46.77	8.24	55.01	68.20	-13.19	peak
3	5700.000	48.61	8.34	56.95	105.20	-48.25	peak
4	5720.000	48.69	8.38	57.07	110.80	-53.73	peak
5	5725.000	48.98	8.39	57.37	122.20	-64.83	peak
6	5800.800	86.02	8.53	94.55	--	--	peak
7	5850.000	49.19	8.63	57.82	122.20	-64.38	peak
8	5855.000	48.26	8.64	56.90	110.80	-53.90	peak
9	5875.000	49.25	8.69	57.94	105.20	-47.26	peak
10	5925.000	47.89	8.79	56.68	68.20	-11.52	peak
11	6198.400	51.18	9.52	60.70	68.20	-7.50	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

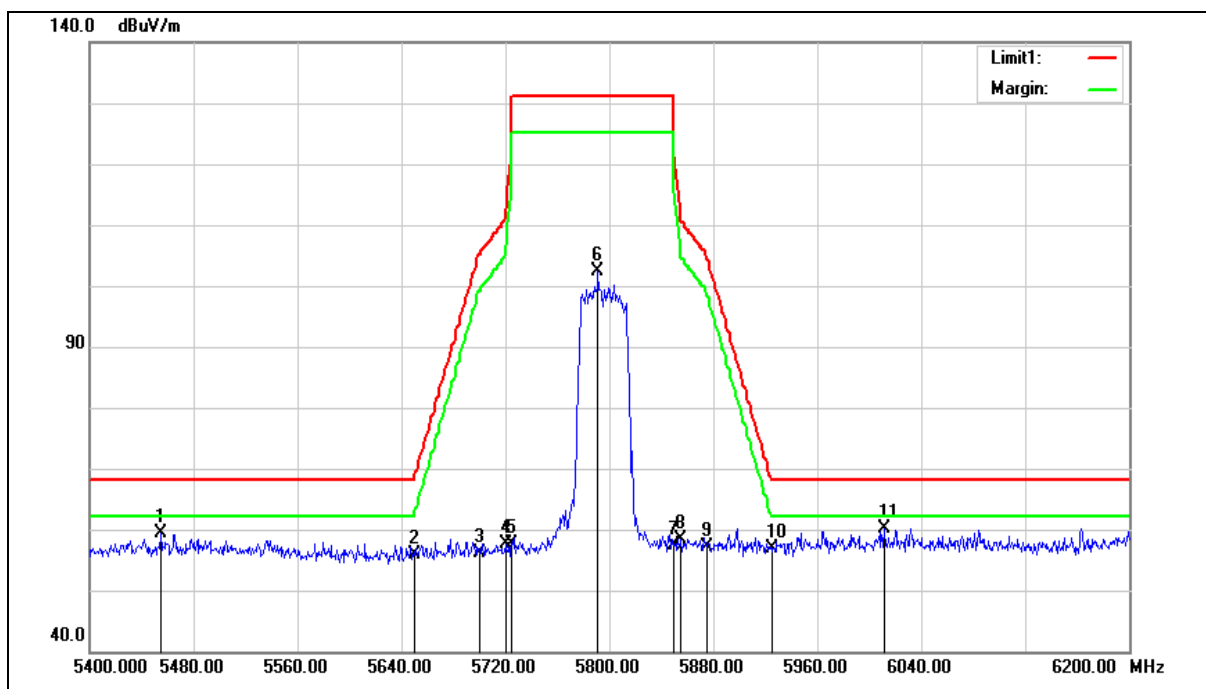

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.200	51.47	7.81	59.28	68.20	-8.92	peak
2	5650.000	47.57	8.24	55.81	68.20	-12.39	peak
3	5700.000	47.83	8.34	56.17	105.20	-49.03	peak
4	5720.000	49.25	8.38	57.63	110.80	-53.17	peak
5	5725.000	49.28	8.39	57.67	122.20	-64.53	peak
6	5791.200	93.82	8.52	102.34	--	--	peak
7	5850.000	48.83	8.63	57.46	122.20	-64.74	peak
8	5855.000	49.77	8.64	58.41	110.80	-52.39	peak
9	5875.000	48.49	8.69	57.18	105.20	-48.02	peak
10	5925.000	48.08	8.79	56.87	68.20	-11.33	peak
11	6011.200	51.20	8.98	60.18	68.20	-8.02	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

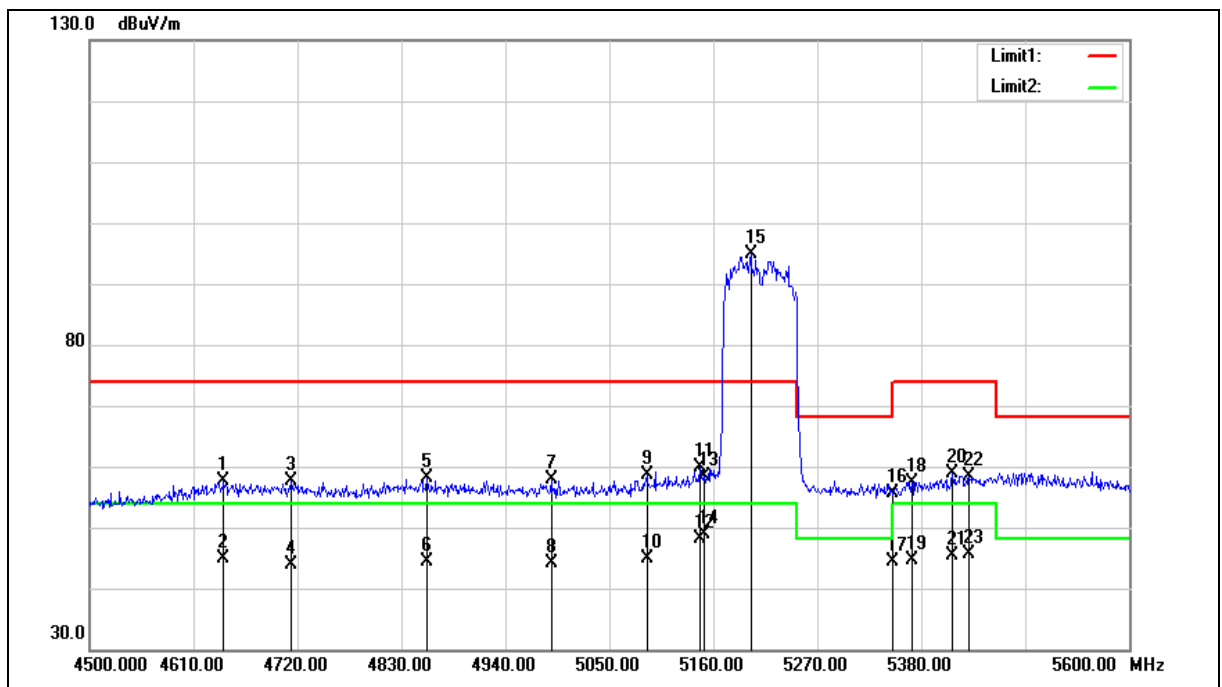

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4641.900	52.25	5.41	57.66	74.00	-16.34	peak
2	4641.900	39.46	5.41	44.87	54.00	-9.13	AVG
3	4713.400	52.00	5.63	57.63	74.00	-16.37	peak
4	4713.400	38.33	5.63	43.96	54.00	-10.04	AVG
5	4856.400	52.08	6.07	58.15	74.00	-15.85	peak
6	4856.400	38.35	6.07	44.42	54.00	-9.58	AVG
7	4988.400	51.33	6.47	57.80	74.00	-16.20	peak
8	4988.400	37.54	6.47	44.01	54.00	-9.99	AVG
9	5089.600	51.90	6.76	58.66	74.00	-15.34	peak
10	5089.600	38.12	6.76	44.88	54.00	-9.12	AVG
11	5145.700	52.84	6.93	59.77	74.00	-14.23	peak
12	5145.700	41.26	6.93	48.19	54.00	-5.81	AVG
13	5150.000	51.34	6.94	58.28	74.00	-15.72	peak
14	5150.000	41.92	6.94	48.86	54.00	-5.14	AVG
15	5199.600	87.69	7.08	94.77	--	--	peak
16	5350.000	48.10	7.50	55.60	74.00	-18.40	peak
17	5350.000	36.79	7.50	44.29	54.00	-9.71	AVG
18	5370.100	49.87	7.56	57.43	74.00	-16.57	peak
19	5370.100	37.00	7.56	44.56	54.00	-9.44	AVG
20	5413.000	51.22	7.68	58.90	74.00	-15.10	peak
21	5413.000	37.82	7.68	45.50	54.00	-8.50	AVG
22	5430.600	50.65	7.74	58.39	74.00	-15.61	peak
23	5430.600	38.01	7.74	45.75	54.00	-8.25	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

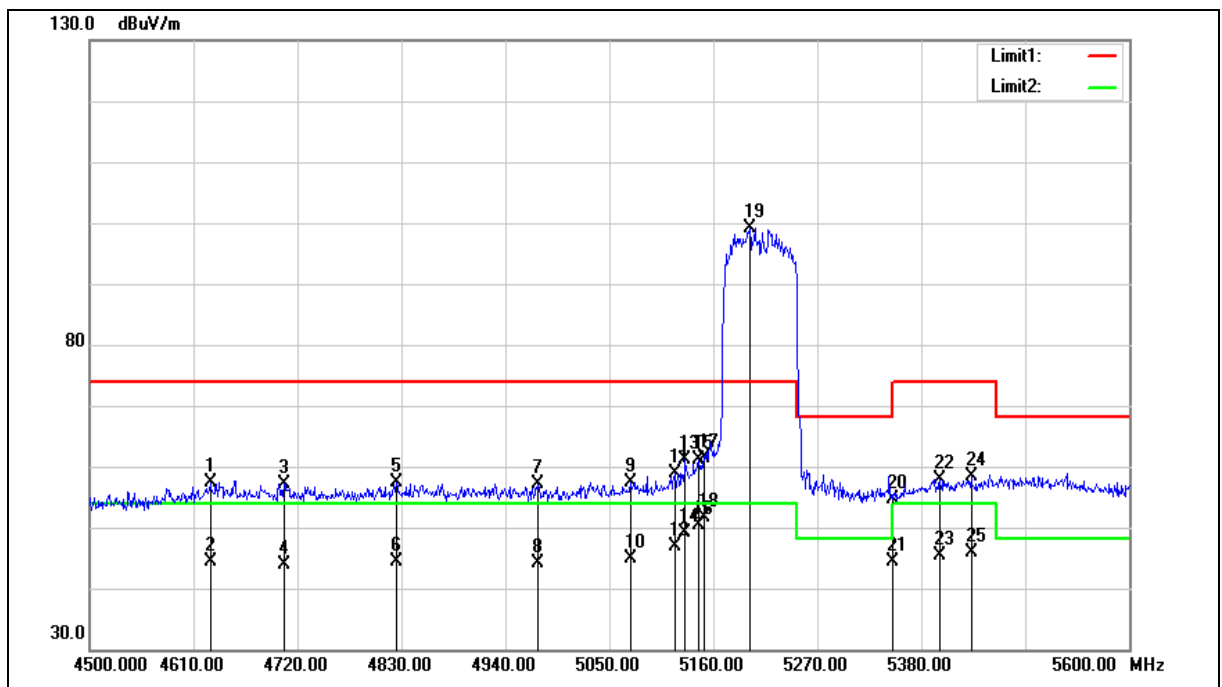

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4627.600	51.99	5.37	57.36	74.00	-16.64	peak
2	4627.600	38.96	5.37	44.33	54.00	-9.67	AVG
3	4705.700	51.53	5.60	57.13	74.00	-16.87	peak
4	4705.700	38.33	5.60	43.93	54.00	-10.07	AVG
5	4824.500	51.38	5.97	57.35	74.00	-16.65	peak
6	4824.500	38.48	5.97	44.45	54.00	-9.55	AVG
7	4974.100	50.75	6.43	57.18	74.00	-16.82	peak
8	4974.100	37.66	6.43	44.09	54.00	-9.91	AVG
9	5072.000	50.71	6.71	57.42	74.00	-16.58	peak
10	5072.000	38.11	6.71	44.82	54.00	-9.18	AVG
11	5119.300	52.05	6.84	58.89	74.00	-15.11	peak
12	5119.300	39.99	6.84	46.83	54.00	-7.17	AVG
13	5130.300	54.14	6.88	61.02	74.00	-12.98	peak
14	5130.300	42.14	6.88	49.02	54.00	-4.98	AVG
15	5144.600	54.21	6.92	61.13	74.00	-12.87	peak
16	5144.600	43.52	6.92	50.44	54.00	-3.56	AVG
17	5150.000	54.55	6.94	61.49	74.00	-12.51	peak
18	5150.000	44.70	6.94	51.64	54.00	-2.36	AVG
19	5198.500	92.03	7.08	99.11	--	--	peak
20	5350.000	47.21	7.50	54.71	74.00	-19.29	peak
21	5350.000	36.85	7.50	44.35	54.00	-9.65	AVG
22	5399.800	50.33	7.65	57.98	74.00	-16.02	peak
23	5399.800	37.66	7.65	45.31	54.00	-8.69	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5432.800	50.53	7.74	58.27	74.00	-15.73	peak
25	5432.800	38.15	7.74	45.89	54.00	-8.11	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

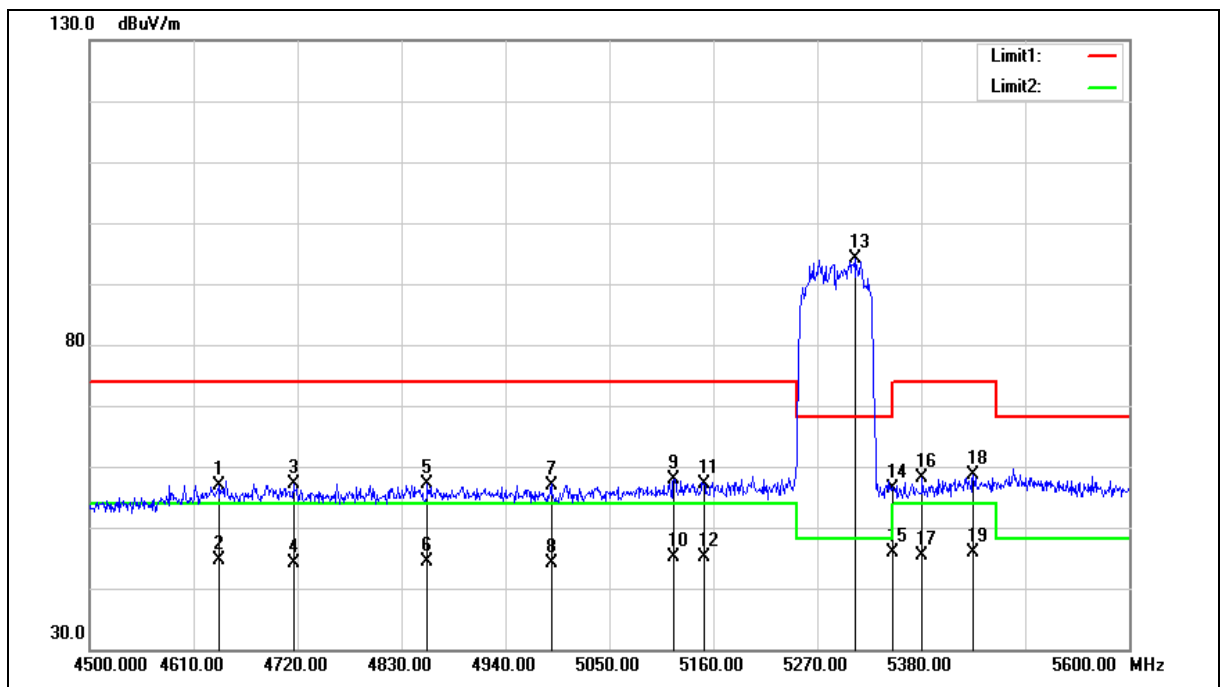

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4636.400	51.37	5.40	56.77	74.00	-17.23	peak
2	4636.400	39.28	5.40	44.68	54.00	-9.32	AVG
3	4715.600	51.43	5.63	57.06	74.00	-16.94	peak
4	4715.600	38.38	5.63	44.01	54.00	-9.99	AVG
5	4857.500	51.10	6.08	57.18	74.00	-16.82	peak
6	4857.500	38.39	6.08	44.47	54.00	-9.53	AVG
7	4988.400	50.53	6.47	57.00	74.00	-17.00	peak
8	4988.400	37.55	6.47	44.02	54.00	-9.98	AVG
9	5118.200	51.15	6.84	57.99	74.00	-16.01	peak
10	5118.200	38.19	6.84	45.03	54.00	-8.97	AVG
11	5150.000	50.18	6.94	57.12	74.00	-16.88	peak
12	5150.000	38.31	6.94	45.25	54.00	-8.75	AVG
13	5309.600	86.85	7.39	94.24	--	--	peak
14	5350.000	48.94	7.50	56.44	74.00	-17.56	peak
15	5350.000	38.37	7.50	45.87	54.00	-8.13	AVG
16	5381.100	50.45	7.60	58.05	74.00	-15.95	peak
17	5381.100	37.75	7.60	45.35	54.00	-8.65	AVG
18	5435.000	50.76	7.75	58.51	74.00	-15.49	peak
19	5435.000	38.10	7.75	45.85	54.00	-8.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

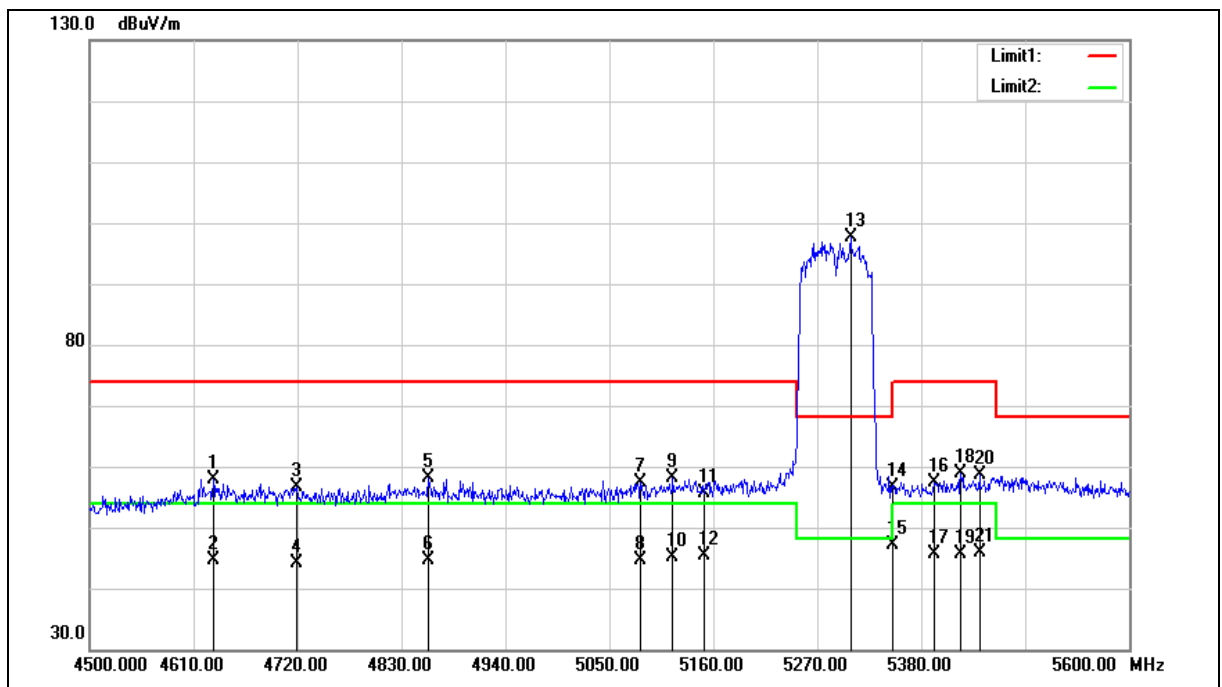

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4630.900	52.45	5.38	57.83	74.00	-16.17	peak
2	4630.900	39.22	5.38	44.60	54.00	-9.40	AVG
3	4718.900	50.98	5.65	56.63	74.00	-17.37	peak
4	4718.900	38.56	5.65	44.21	54.00	-9.79	AVG
5	4858.600	51.93	6.08	58.01	74.00	-15.99	peak
6	4858.600	38.43	6.08	44.51	54.00	-9.49	AVG
7	5083.000	50.73	6.74	57.47	74.00	-16.53	peak
8	5083.000	37.98	6.74	44.72	54.00	-9.28	AVG
9	5117.100	51.25	6.84	58.09	74.00	-15.91	peak
10	5117.100	38.25	6.84	45.09	54.00	-8.91	AVG
11	5150.000	48.58	6.94	55.52	74.00	-18.48	peak
12	5150.000	38.38	6.94	45.32	54.00	-8.68	AVG
13	5305.200	90.23	7.38	97.61	--	--	peak
14	5350.000	49.24	7.50	56.74	74.00	-17.26	peak
15	5350.000	39.67	7.50	47.17	54.00	-6.83	AVG
16	5393.200	49.83	7.63	57.46	74.00	-16.54	peak
17	5393.200	37.92	7.63	45.55	54.00	-8.45	AVG
18	5421.800	51.13	7.71	58.84	74.00	-15.16	peak
19	5421.800	37.90	7.71	45.61	54.00	-8.39	AVG
20	5441.600	50.97	7.76	58.73	74.00	-15.27	peak
21	5441.600	38.17	7.76	45.93	54.00	-8.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

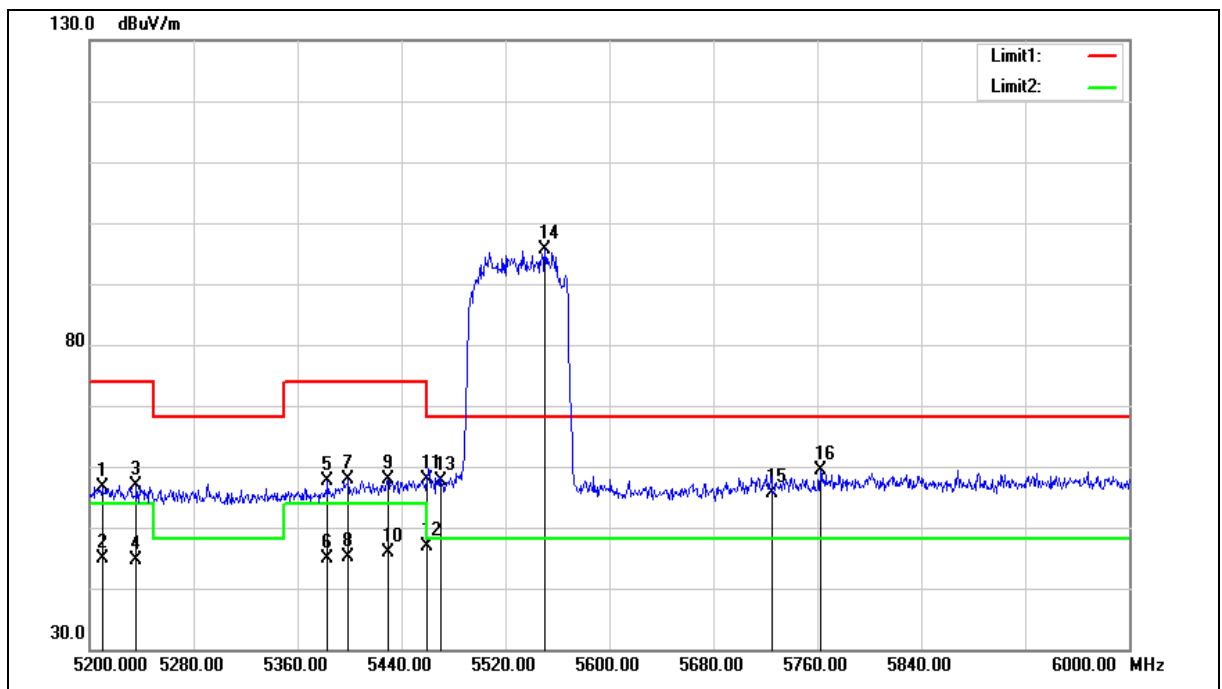

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5209.600	49.40	7.11	56.51	74.00	-17.49	peak
2	5209.600	37.77	7.11	44.88	54.00	-9.12	AVG
3	5236.000	49.63	7.18	56.81	74.00	-17.19	peak
4	5236.000	37.34	7.18	44.52	54.00	-9.48	AVG
5	5383.200	49.93	7.60	57.53	74.00	-16.47	peak
6	5383.200	37.24	7.60	44.84	54.00	-9.16	AVG
7	5399.200	50.26	7.65	57.91	74.00	-16.09	peak
8	5399.200	37.52	7.65	45.17	54.00	-8.83	AVG
9	5429.600	50.06	7.73	57.79	74.00	-16.21	peak
10	5429.600	38.14	7.73	45.87	54.00	-8.13	AVG
11	5460.000	49.97	7.82	57.79	74.00	-16.21	peak
12	5460.000	38.97	7.82	46.79	54.00	-7.21	AVG
13	5470.000	49.79	7.85	57.64	68.20	-10.56	peak
14	5550.400	87.62	8.03	95.65	--	--	peak
15	5725.000	47.29	8.39	55.68	68.20	-12.52	peak
16	5762.400	50.95	8.46	59.41	68.20	-8.79	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

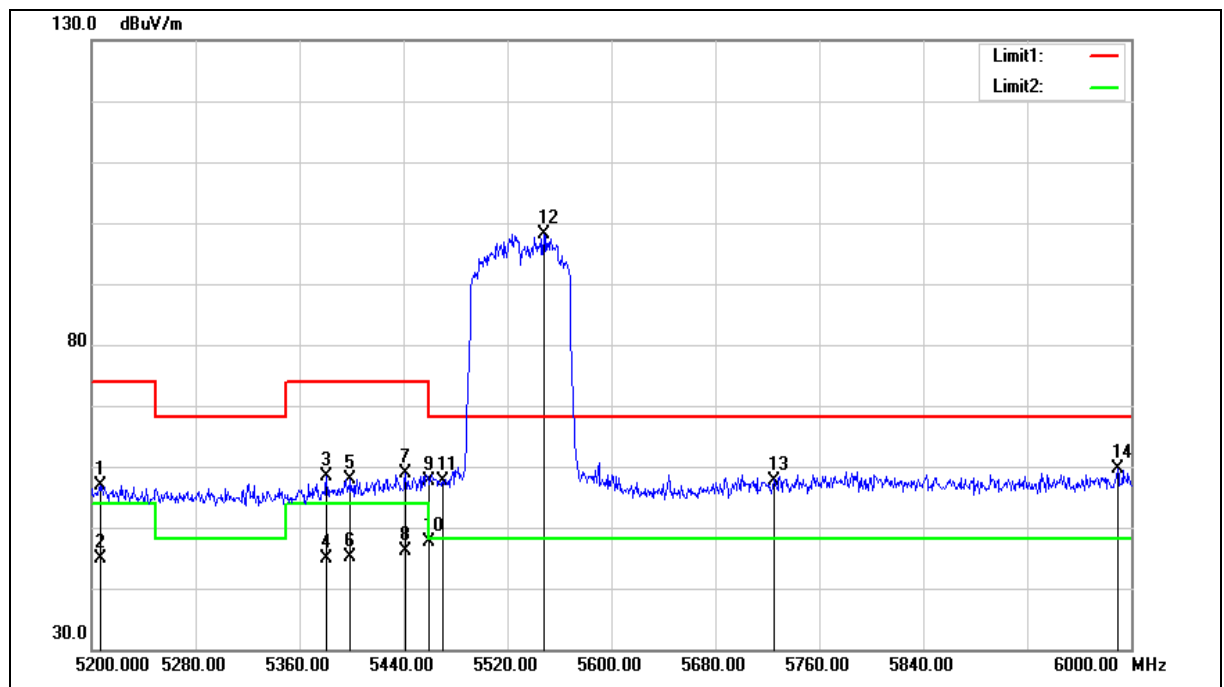

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5206.400	49.70	7.10	56.80	74.00	-17.20	peak
2	5206.400	37.83	7.10	44.93	54.00	-9.07	AVG
3	5380.800	50.71	7.60	58.31	74.00	-15.69	peak
4	5380.800	37.19	7.60	44.79	54.00	-9.21	AVG
5	5399.200	50.18	7.65	57.83	74.00	-16.17	peak
6	5399.200	37.51	7.65	45.16	54.00	-8.84	AVG
7	5441.600	51.08	7.76	58.84	74.00	-15.16	peak
8	5441.600	38.47	7.76	46.23	54.00	-7.77	AVG
9	5460.000	49.87	7.82	57.69	74.00	-16.31	peak
10	5460.000	39.69	7.82	47.51	54.00	-6.49	AVG
11	5470.000	49.70	7.85	57.55	68.20	-10.65	peak
12	5548.000	90.15	8.03	98.18	--	--	peak
13	5725.000	49.31	8.39	57.70	68.20	-10.50	peak
14	5989.600	50.67	8.92	59.59	68.20	-8.61	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

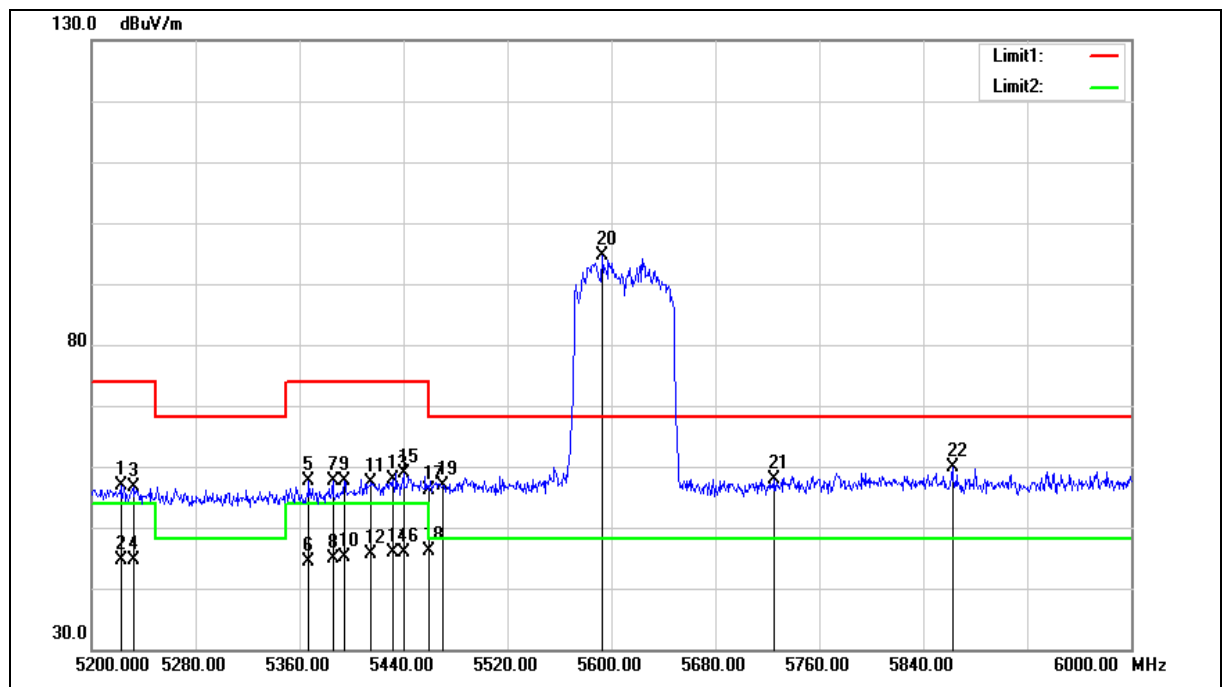

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5222.400	49.79	7.14	56.93	74.00	-17.07	peak
2	5222.400	37.49	7.14	44.63	54.00	-9.37	AVG
3	5232.000	49.39	7.17	56.56	74.00	-17.44	peak
4	5232.000	37.37	7.17	44.54	54.00	-9.46	AVG
5	5367.200	50.12	7.55	57.67	74.00	-16.33	peak
6	5367.200	36.91	7.55	44.46	54.00	-9.54	AVG
7	5385.600	50.06	7.61	57.67	74.00	-16.33	peak
8	5385.600	37.25	7.61	44.86	54.00	-9.14	AVG
9	5394.400	50.04	7.63	57.67	74.00	-16.33	peak
10	5394.400	37.56	7.63	45.19	54.00	-8.81	AVG
11	5415.200	49.58	7.70	57.28	74.00	-16.72	peak
12	5415.200	37.82	7.70	45.52	54.00	-8.48	AVG
13	5432.000	50.10	7.74	57.84	74.00	-16.16	peak
14	5432.000	38.05	7.74	45.79	54.00	-8.21	AVG
15	5440.000	51.01	7.76	58.77	74.00	-15.23	peak
16	5440.000	38.06	7.76	45.82	54.00	-8.18	AVG
17	5460.000	48.38	7.82	56.20	74.00	-17.80	peak
18	5460.000	38.33	7.82	46.15	54.00	-7.85	AVG
19	5470.000	48.91	7.85	56.76	68.20	-11.44	peak
20	5592.800	86.43	8.11	94.54	--	--	peak
21	5725.000	49.56	8.39	57.95	68.20	-10.25	peak
22	5862.400	51.12	8.66	59.78	68.20	-8.42	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

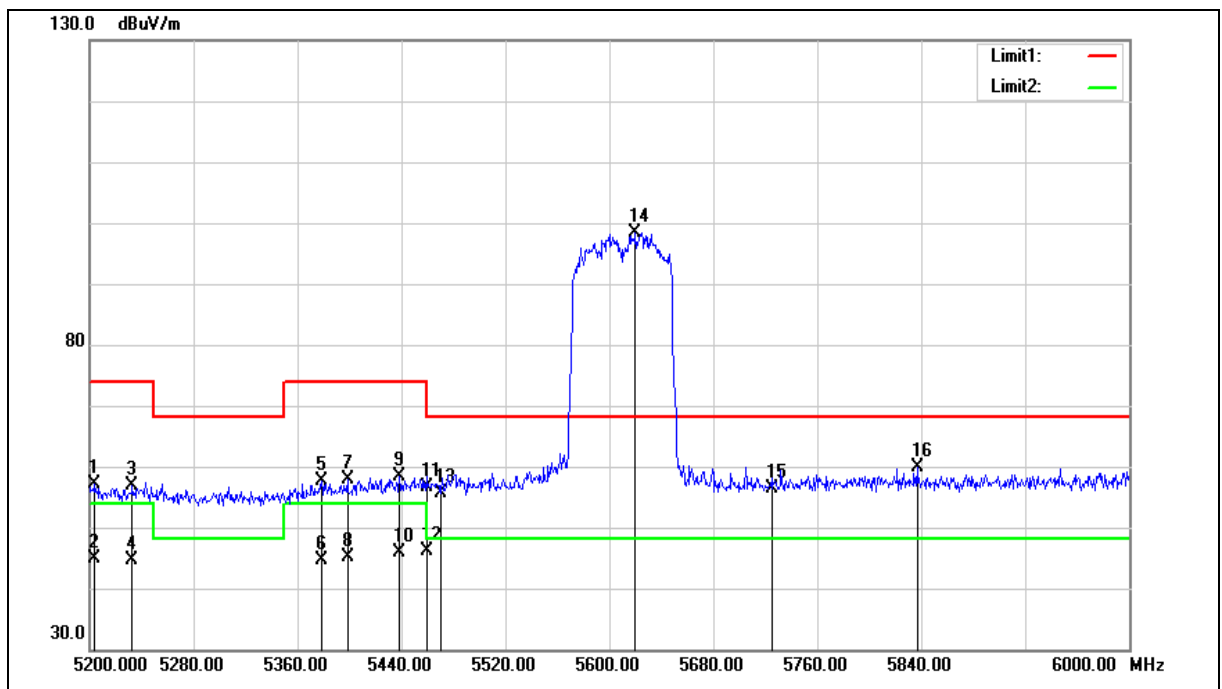

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5204.000	49.97	7.09	57.06	74.00	-16.94	peak
2	5204.000	37.86	7.09	44.95	54.00	-9.05	AVG
3	5232.800	49.81	7.17	56.98	74.00	-17.02	peak
4	5232.800	37.34	7.17	44.51	54.00	-9.49	AVG
5	5378.400	50.13	7.59	57.72	74.00	-16.28	peak
6	5378.400	37.12	7.59	44.71	54.00	-9.29	AVG
7	5398.400	50.28	7.65	57.93	74.00	-16.07	peak
8	5398.400	37.55	7.65	45.20	54.00	-8.80	AVG
9	5438.400	50.54	7.76	58.30	74.00	-15.70	peak
10	5438.400	38.12	7.76	45.88	54.00	-8.12	AVG
11	5460.000	48.72	7.82	56.54	74.00	-17.46	peak
12	5460.000	38.27	7.82	46.09	54.00	-7.91	AVG
13	5470.000	47.71	7.85	55.56	68.20	-12.64	peak
14	5620.000	90.15	8.17	98.32	--	--	peak
15	5725.000	47.97	8.39	56.36	68.20	-11.84	peak
16	5836.800	51.39	8.61	60.00	68.20	-8.20	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

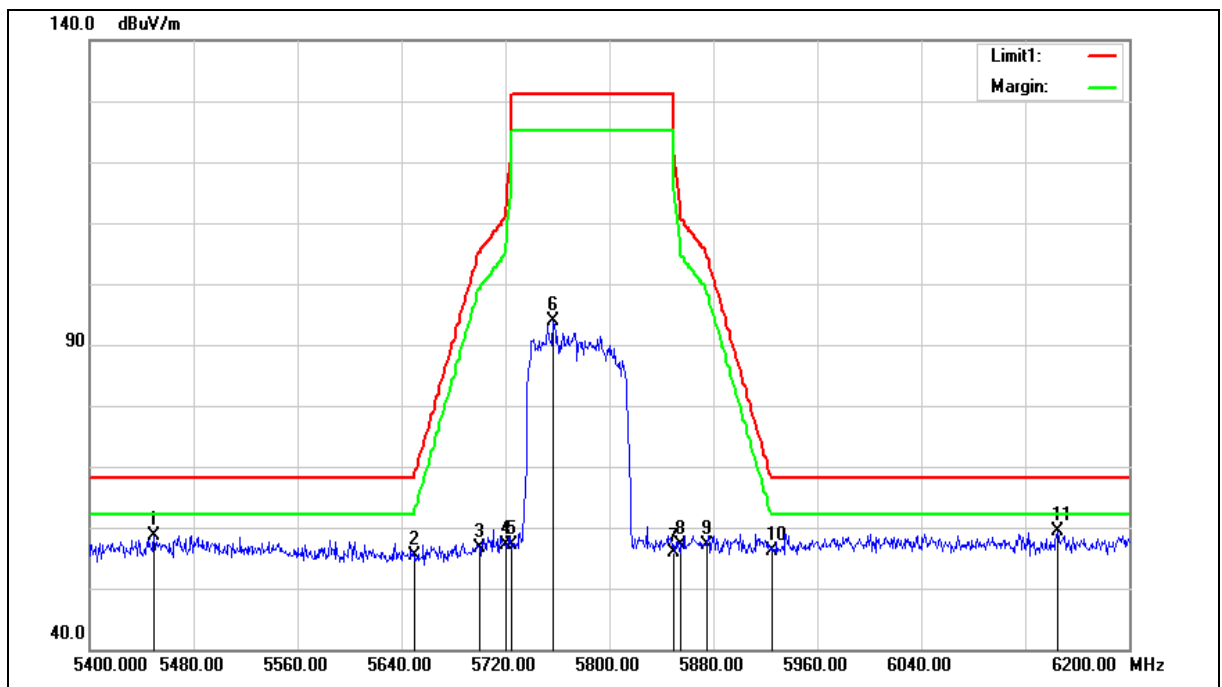

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.600	50.88	7.79	58.67	68.20	-9.53	peak
2	5650.000	47.22	8.24	55.46	68.20	-12.74	peak
3	5700.000	48.31	8.34	56.65	105.20	-48.55	peak
4	5720.000	48.77	8.38	57.15	110.80	-53.65	peak
5	5725.000	48.83	8.39	57.22	122.20	-64.98	peak
6	5756.800	85.51	8.45	93.96	--	--	peak
7	5850.000	47.26	8.63	55.89	122.20	-66.31	peak
8	5855.000	48.61	8.64	57.25	110.80	-53.55	peak
9	5875.000	48.38	8.69	57.07	105.20	-48.13	peak
10	5925.000	47.32	8.79	56.11	68.20	-12.09	peak
11	6144.800	50.01	9.36	59.37	68.20	-8.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

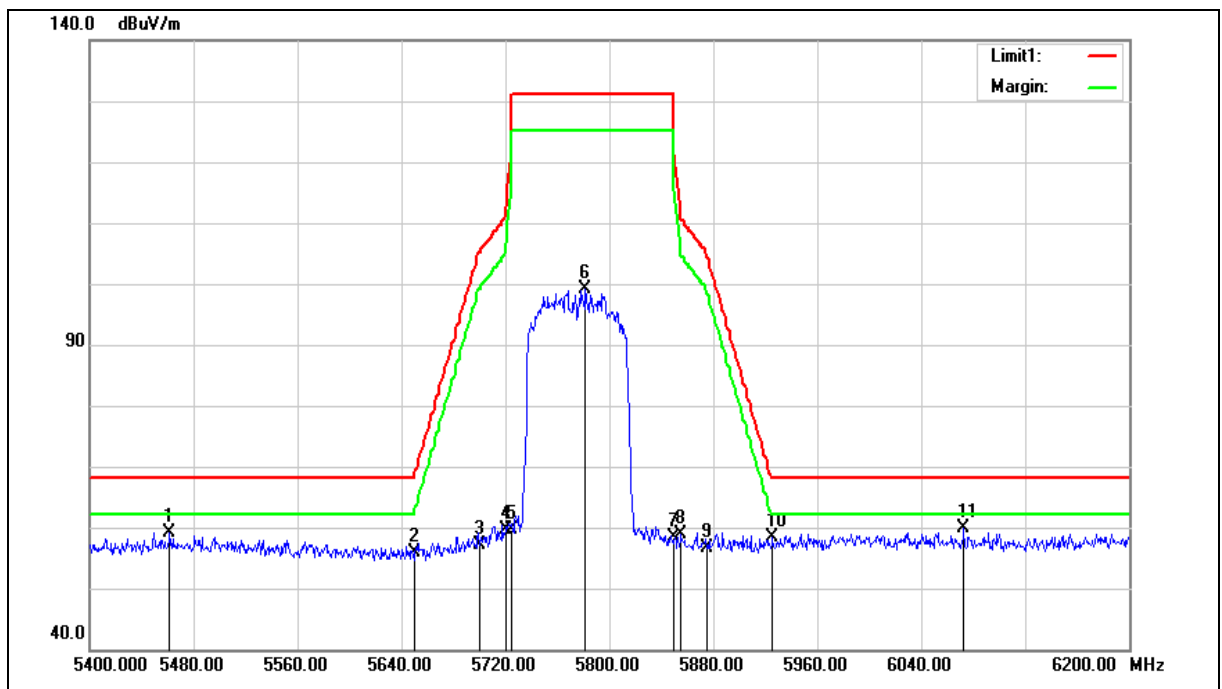

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5461.600	51.38	7.82	59.20	68.20	-9.00	peak
2	5650.000	47.52	8.24	55.76	68.20	-12.44	peak
3	5700.000	48.84	8.34	57.18	105.20	-48.02	peak
4	5720.000	51.15	8.38	59.53	110.80	-51.27	peak
5	5725.000	51.24	8.39	59.63	122.20	-62.57	peak
6	5781.600	90.71	8.50	99.21	--	--	peak
7	5850.000	49.81	8.63	58.44	122.20	-63.76	peak
8	5855.000	50.27	8.64	58.91	110.80	-51.89	peak
9	5875.000	48.05	8.69	56.74	105.20	-48.46	peak
10	5925.000	49.51	8.79	58.30	68.20	-9.90	peak
11	6072.800	50.71	9.16	59.87	68.20	-8.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

With HDMI

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

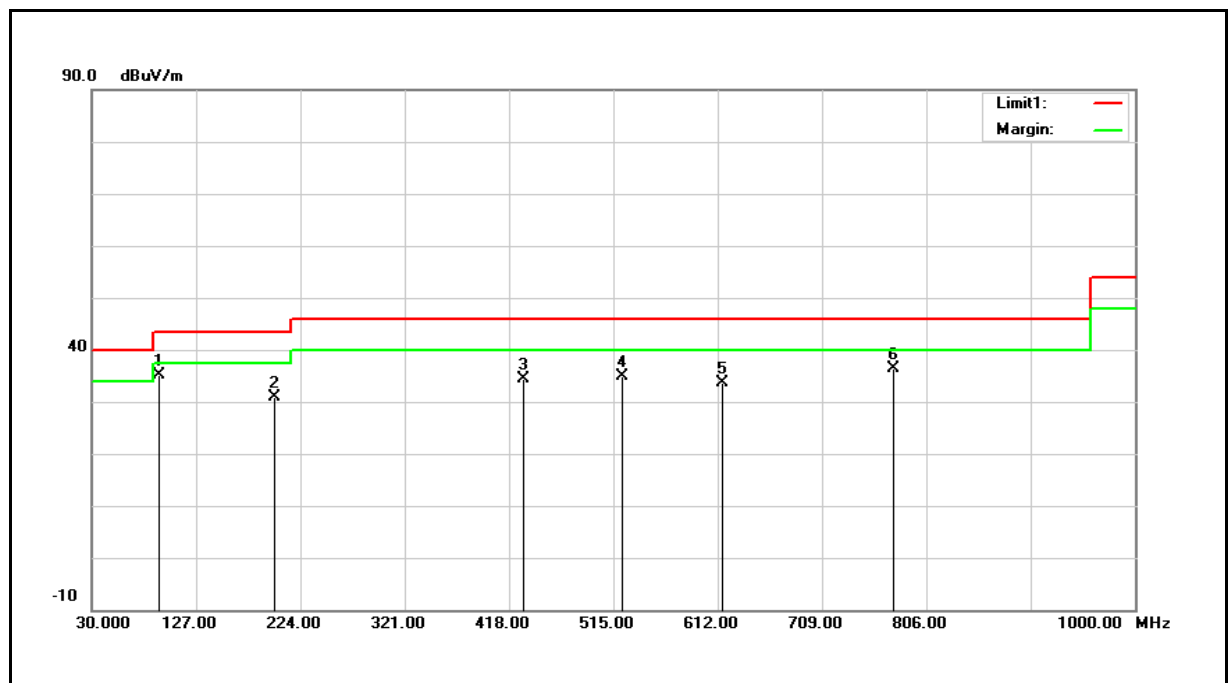

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	93.0500	46.80	-11.67	35.13	43.50	-8.37	QP
2	199.7500	38.68	-7.79	30.89	43.50	-12.61	QP
3	431.5800	35.64	-1.21	34.43	46.00	-11.57	QP
4	522.7600	34.50	0.40	34.90	46.00	-11.10	QP
5	615.8800	31.11	2.63	33.74	46.00	-12.26	QP
6	775.9300	30.77	5.53	36.30	46.00	-9.70	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: 35.13 = 11.67 + 46.80

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

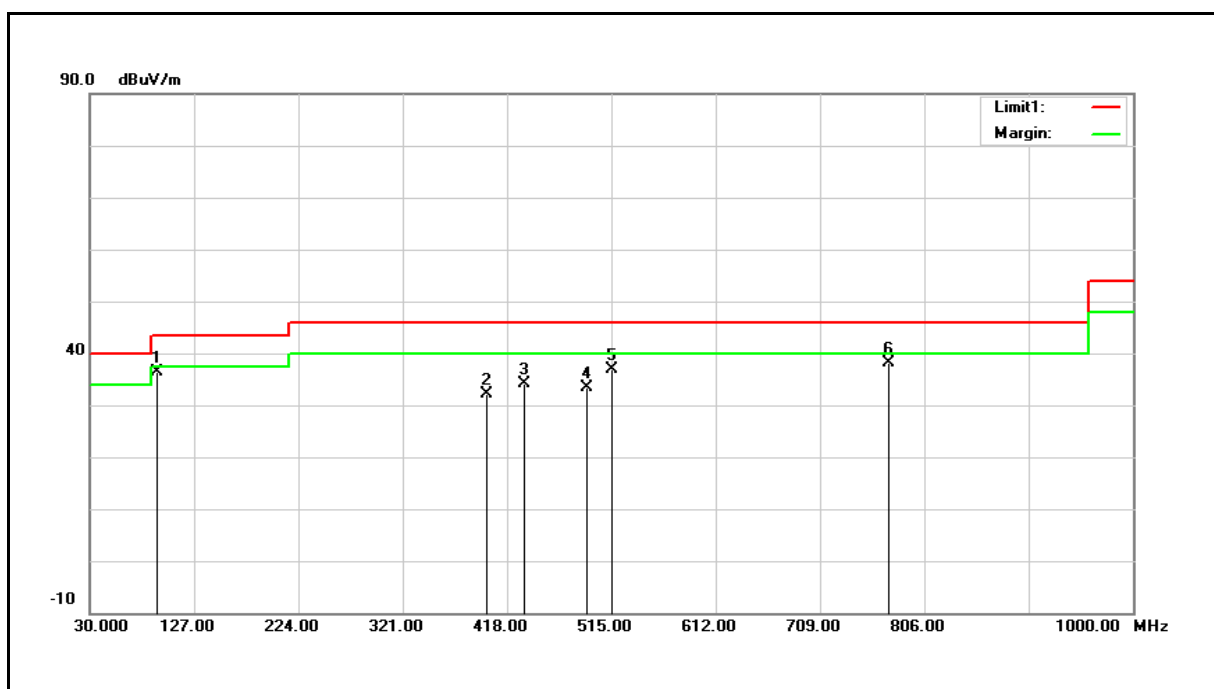

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	93.0500	48.10	-11.67	36.43	43.50	-7.07	QP
2	398.6000	34.22	-2.12	32.10	46.00	-13.90	QP
3	433.5200	35.19	-1.16	34.03	46.00	-11.97	QP
4	492.6900	33.60	-0.22	33.38	46.00	-12.62	QP
5	515.9700	36.73	0.24	36.97	46.00	-9.03	QP
6	773.0200	32.53	5.48	38.01	46.00	-7.99	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 36.43 = -11.67 + 48.10

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量側 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

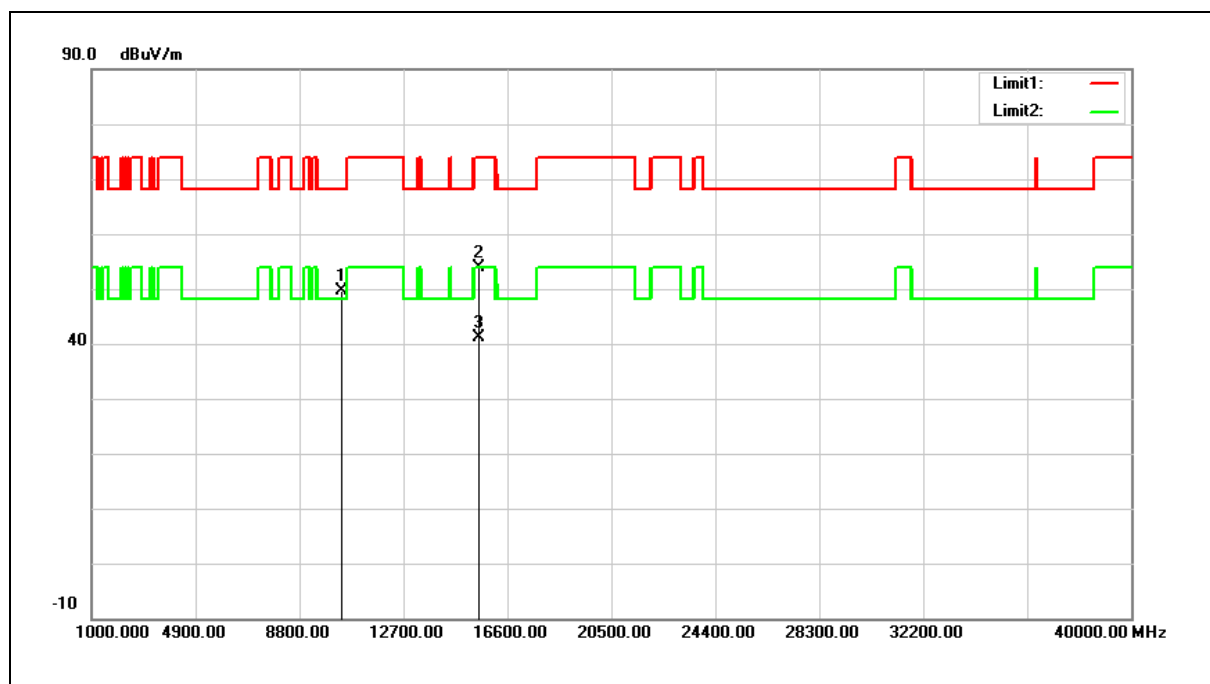

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.32	17.29	49.93	68.20	-18.27	peak
2	15540.000	33.09	20.75	53.55	74.00	-20.45	peak
3	15540.000	20.47	20.75	41.39	54.00	-12.61	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 49.93 = 17.29 + 32.32

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

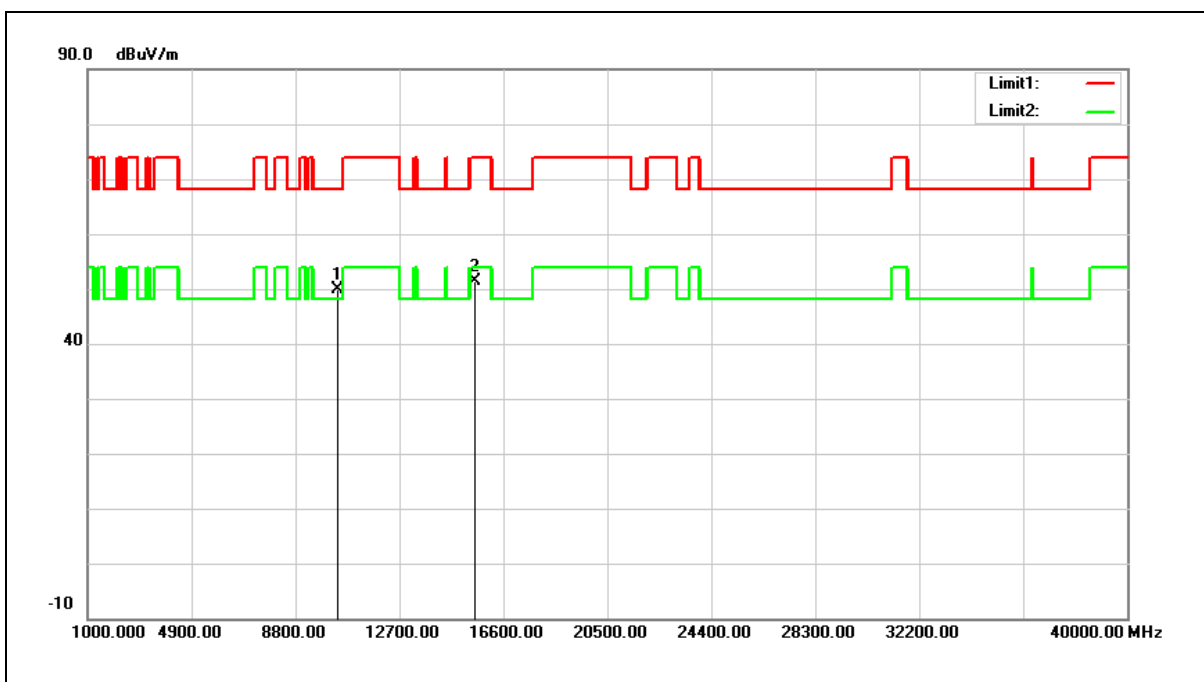

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.55	17.29	50.09	68.20	-18.11	peak
2	15540.000	30.72	20.75	51.79	74.00	-22.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 50.09 = 17.29 + 32.55

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註: 其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射, 其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

