

Japan Specified Radio Test Report

Report No. : 1811C50039712501

Applicant : Anker Innovations Limited

Address : Unit 56, 8th Floor, Tower 2, Admiralty Centre,
18 Harcourt Road, Hong Kong

Product Name : Anker SOLIX F3000 Portable Power Station

Report Date : 2025-06-05

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	7
1.4. Description of Test Configuration	7
1.5. Test Conditions	8
1.6. Test Voltage	8
1.7. Test Equipment List	9
1.8. Description of Test Facility	9
1.9. Disclaimer	10
1.10. Measurement Uncertainty	10
2. Summary of Test Results	11
3. Frequency Tolerance Test	12
3.1. Test Limit	12
3.2. Test Setup	12
3.3. Test Procedure	12
3.4. Test Data	12
4. Antenna Power Test	13
4.1. Test Limit	13
4.2. Test Setup	13
4.3. Test Configuration	13
4.4. Test Data	13
5. Occupied Bandwidth (99%) Test	14
5.1. Test Limit	14
5.2. Test Setup	14
5.3. Test Procedure	14
5.4. Test Data	14
6. Spurious Emissions Intensity Test	15
6.1. Test Limit	15
6.2. Test Setup	15
6.3. Test Procedure	15
6.4. Test Data	15
7. Interference prevention function	16
7.1. Test Limit	16
7.2. Test Setup	16
7.3. Test Configuration	16
7.4. Test Data	16
8. Secondary Radiated Emissions Test	17
8.1. Test Limit	17
8.2. Test Setup	17



8.3. Test Configuration	17
8.4. Test Data	17
APPENDIX I -- TEST SETUP PHOTOGRAPH	18
APPENDIX II -- EXTERNAL PHOTOGRAPH	19
APPENDIX III -- INTERNAL PHOTOGRAPH	22
Appendix Test Data	41
Appendix A: Frequency Error	41
Test Result	41
Test Graphs	42
Appendix B: Antenna Power	44
Test Result	44
Test Graphs	45
Appendix C: Occupied Bandwidth	48
Test Result	48
Test Graphs	49
Appendix D: Spurious Emission of TX	52
Test Result	52
Test Graphs	53
Appendix E: Spurious Emission of RX	68
Test Result	68
Test Graphs	69



TEST REPORT

Applicant : Anker Innovations Limited
Manufacturer : Anker Innovations Limited
Product Name : Anker SOLIX F3000 Portable Power Station
Model No. : A1782
Trade Mark : 
Rating(s) : Please refer to page 7.

Test Standard(s) : MIC Notice No.88 Appendix No.43
Article 2, paragraph 1, item 19

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the MIC Notice No.88 Appendix No.43 and Certificate regulation article 2, paragraph 1, item 19 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

2025-03-17

Date of Test

2025-03-17 to 2025-03-28

Prepared By



(Lene Chen)

Approved & Authorized Signer



(Kingkong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2025-06-05



1. General Information

1.1. Client Information

Applicant	:	Anker Innovations Limited
Address	:	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Manufacturer	:	Anker Innovations Limited
Address	:	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong

1.2. Description of Device (EUT)

Product Name	:	Anker SOLIX F3000 Portable Power Station
Model No.	:	A1782
Trade Mark	:	ANKER
Test Power Supply	:	DC 51.2V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Hardware Version	:	V1.0
Software Version	:	V1.0
Adapter	:	N/A
RF Specification		
Operation Mode	:	☒ BT BLE
Support Rate	:	☒ 1Mbps ☐ 2Mbps
Operation Frequency	:	2402~2480MHz
Number of Channel	:	40 Channels
Modulation Type	:	GFSK
Antenna Type	:	FPC Antenna
Antenna Gain(Peak)	:	3.78dBi
Rated output Power	:	Bluetooth BLE_1M: 2mW Max. Bluetooth BLE_2M: 2mW Max.
Remark: (1) All of the RF specification are provided by customer. (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



Rating(s):

Anker SOLIX F3000 Portable Power Station
 品番: A1782 定格容量: 51.2Vdc 60000mAh/3072Wh
 AC入力 (AC Input/Output Port):
 100V~ 15A Max, 1500W Max, 50Hz/60Hz
 100V~ 30A Max, 3000W Max, 50Hz/60Hz
 200V~ 15A Max, 3000W Max, 50Hz/60Hz
 AC入力 (AC Input/Output Port): パススルー:
 100V~ 15A Max, 1500W Max, 50Hz/60Hz
 AC出力 (AC Input/Output Port): 100V~ 30A Max, 3000W Max, 50Hz/60Hz
 AC出力 (NEMA 5-15): 100V~ 15A Max, 50Hz/60Hz, Total 3000W Max
 High-PV 入力: 11-165V~17A Max (1600W Max)
 Low-PV 入力: 11-60V~17A Max(800W Max)
 DC 入力: 60V Max, 120A Max
 USB-C 出力: 5V~3A/ 9V~3A/ 15V~3A/ 20V~5A (100W Max Per Port)
 USB-A 出力: 5V~2.4A (12W Max Per Port)
 シガーソケット出力: 12V~10A アンダーソン出力: 13.4V~30A
 動作温度 (機器の充電時): -20°C~+40°C 動作温度 (本製品の充電時): 0°C~+40°C

For use with Anker SOLIX F3000 Portable Power Station
 Expansion Battery (3072Wh) only
 Anker Innovations Limited
 Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt
 Road, Hong Kong
 Made in China

Ⓡ 220-JP9120

Li-ion 32

ALWAYS HERE TO HELP
<https://support.ankersolix.com>
 support@anker.com
 support.me@anker.com
 CED-CN@anker.com

(US/CA) +1 (800) 988 7973 English only
 (États-Unis/Canada) +1 (800) 988 7973 Anglais seulement
 (UK) +44 (0) 1616 056 301
 (DE) +49 (800) 000 2522
 (日本) +81 03 4455 7823

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
CH340 USB TO TTL UART	Mercury electronics technologies	MCS-71 Pro	/
computer	Lenovo	ThinkBook 16 G6 ABP	/

1.4. Description of Test Configuration

The EUT has been tested under typical operating condition. The Applicant provides software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	19	2440	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
06	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		

Note: EUT was tested with channel 00, 19 and 39.



1.5. Test Conditions

	Normal Test Conditions
Temperature	22.3°C
Relative Humidity	46%
Pressure Range	101kPa

1.6. Test Voltage

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input To EUT	DC 51.2V	DC 56.32V	DC 46.08V
Output To RF Module	DC 3.30V	DC 3.30V	DC 3.30V
Voltage Variation (%)	--	0.00%	0.00%

Note: Voltage Variation (%)=(Output high or Low Voltage - Output Normal Voltage)/ Output Normal Voltage* 100

For extreme voltage test, we have tested the relationship between the external power supply and RF IC power supply. Base on the test results, only the normal voltage was selected to perform all items.



1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	2024-05-06	2025-05-05
2	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY50531823	2024-09-09	2025-09-08
3	MXG RF Vector Signal Generator	Agilent	N5182A	MY47420647	2025-01-14	2026-01-13
4	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS8 0B	N/A	2024-10-14	2025-10-13
5	DC Power Supply	IVYTECH	IV3605	1804D360510	2024-09-09	2025-09-08
6	Oscilloscope	Tektronix	MDO3012	C020298	2024-10-10	2025-10-09

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.
- (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992).
- (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- (d) Calibration, etc., conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c)

From JRL Article 24 .2, paragraph 4, Item 2

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.



1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

1.10. Measurement Uncertainty

Parameter	Uncertainty
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Frequency tolerance	74.60Hz
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



2. Summary of Test Results

Test Standard	Description of Test	Result
MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 Item 19	Frequency Tolerance	Complies
	Antenna power	Complies
	EIRP	Complies*
	Antenna Power Tolerance	Complies
	Occupied Bandwidth	Complies
	Spread Bandwidth	N/A
	Spurious Emissions	Complies
	Carrier sensing function 1	N/A**
	Carrier sensing function 2	N/A***
	Interference prevention function	Complies
	Secondary Radiated Emissions	Complies
	Dwell Time	N/A
	Transmission Radiated Angle Width (3dB Beam Bandwidth)	N/A****
	Antenna Absolute Gain	Complies

Note:

(1) N/A is an abbreviation for Not Applicable.

(2) This device have more than 1 subcarrier in 1MHz, compliance with the requirement.

*: Application to Antenna Gain more than 2.14dBi.

**: Application to transmitting devices which EIRP is less than (2.14dBi + antenna power limit) and the shortage of EIRP is compensated by the antenna power. Not applicable to this product.

***: Application to transmitting devices with OFDM modulation and the occupied bandwidth greater than 26MHz.

****: Application to EIRP more than 12.14dBm.




3. Frequency Tolerance Test

3.1. Test Limit

Test Limit	±50 ppm
------------	---------

3.2. Test Setup



3.3. Test Procedure

Test Frequency= test channel

RBW=VBW=10kHz

Span=1MHz

Sweep time=Auto

Detector mode=Positive peak

Indication mode=Max hold

3.4. Test Data

PASS

Please refer to Appendix A of the Appendix Test Data.



4. Antenna Power Test

4.1. Test Limit

No.	Modulation Method	Frequency Range	Antenna Power	E.I.R.P
1.	FHSS(Compound method with DSSS or OFDM) (OBW within 83.5MHz)	2427-2470.75 MHz	3mW/MHz or less	6.91-16.91dBm/MHz
		2400-2483.5 MHz (except 2427-2470.75MHz)	10mW/MHz or less	12.14-22.14dBm/MHz
2.	DSSS (OBW within 26MHz)	2400 - 2483.5 MHz	10mW/MHz or less	12.14-22.14dBm/MHz
3.	OFDM (OBW within 26MHz)		10mW/MHz or less	12.14- 22.14dBm/MHz
4.	OFDM (OBW 26-40MHz)		5mW/MHz or less	9.13-19.13dBm/MHz
5.	Other Digital methods (OBW within 26MHz)		10mW or less	12.14-22.14dBm
6.	Tolerance	+20%		

4.2. Test Setup



4.3. Test Configuration

1. Search Frequency of Peak Power

Test Frequency: test channel,

RBW=VBW≥99% Occupy Bandwidth, Span=5MHz (8MHz for 2M PHY), Sweep time=Auto, Detector mode =Positive peak

2. Antenna power= peak power

4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.



5. Occupied Bandwidth (99%) Test

5.1. Test Limit

Modulation type	Limit
FH:	83.5MHz or less
FH + DS:	83.5MHz or less
FH + OFDM:	83.5MHz or less
OFDM:	40MHz or less
Others:	26MHz or less

5.2. Test Setup



5.3. Test Procedure

Test Frequency= test channel

RBW=VBW=300kHz

Span=4MHz

Sweep time=Auto

Detector mode=Positive peak

Indication mode=Max hold

5.4. Test Data

PASS

Please refer to Appendix C of the Appendix Test Data.



6. Spurious Emissions Intensity Test

6.1. Test Limit

Frequency Range	Test Limit
≤2387MHz	≤2.5μW/MHz (-26dBm/MHz)
2387MHz to 2400MHz	≤25μW/MHz (-16dBm/MHz)
2483.5MHz to 2496.5MHz	≤25μW/MHz (-16dBm/MHz)
≥2496.5MHz	≤2.5μW/MHz (-26dBm/MHz)

6.2. Test Setup



6.3. Test Procedure

Test Frequency: test channel,

RBW=VBW=1MHz, Sweep time=Auto, Detector mode=Positive peak

6.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.

Note: SA set to from 2.4965GHz to 13GHz, plot shows from 2.497GHz to 13GHz as of SA's default format.




7. Interference prevention function

7.1. Test Limit

Test Limit	The identification code shall be 48 bits long
------------	---

7.2. Test Setup

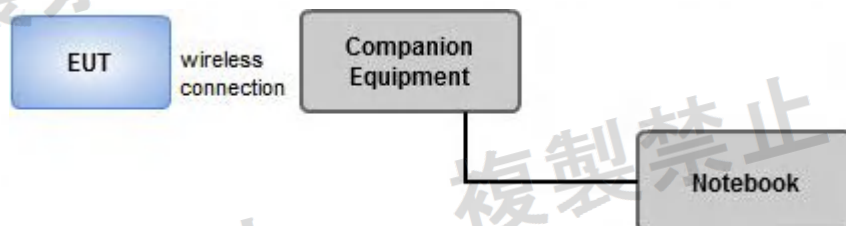

7.3. Test Configuration

1. Set EUT under operating mode and link up with companion equipment
2. Check communication status between EUT and companion equipment is normal
3. Record the max. reading.
4. Confirm the MAC address of EUT

7.4. Test Data

Test Mode	ID Code	Test Results
BLE	A2:14:3C:32:A7:D1	Complies



8. Secondary Radiated Emissions Test

8.1. Test Limit

Frequency Range	Test Limit
30~ 1000MHz	$\leq 4.0\text{nW}$ (-54dBm)
1000~ 12500MHz	$\leq 20\text{nW}$ (-47dBm)

8.2. Test Setup



8.3. Test Configuration

Test Frequency: test channel,
Below 1GHz, RBW=VBW=100kHz;
Above 1GHz, RBW=VBW=1MHz,
Sweep time=Auto, Detector mode=Positive peak

Adjust the spectrum analyzer configuration during final testing: Set the spectrum analyzer at the secondary launch measurement as follows. Center frequency secondary firing frequency Sweep frequency width span = 0Hz If the resolution bandwidth is less than 1 GHz, it is 100 kHz and 1 MHz for 1 GHz or more Same as video bandwidth resolution bandwidth Minimum time guaranteed sweep time measurement accuracy Sweep mode single sweep Detection mode samples or RMS
Any emissions identified during the sweeps exceeds 1/10 of applicable limit, shall be individually measured using RMS detector and compared to the limits

8.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.



APPENDIX I -- TEST SETUP PHOTOGRAPH

APPENDIX II -- EXTERNAL PHOTOGRAPH










APPENDIX III -- INTERNAL PHOTOGRAPH





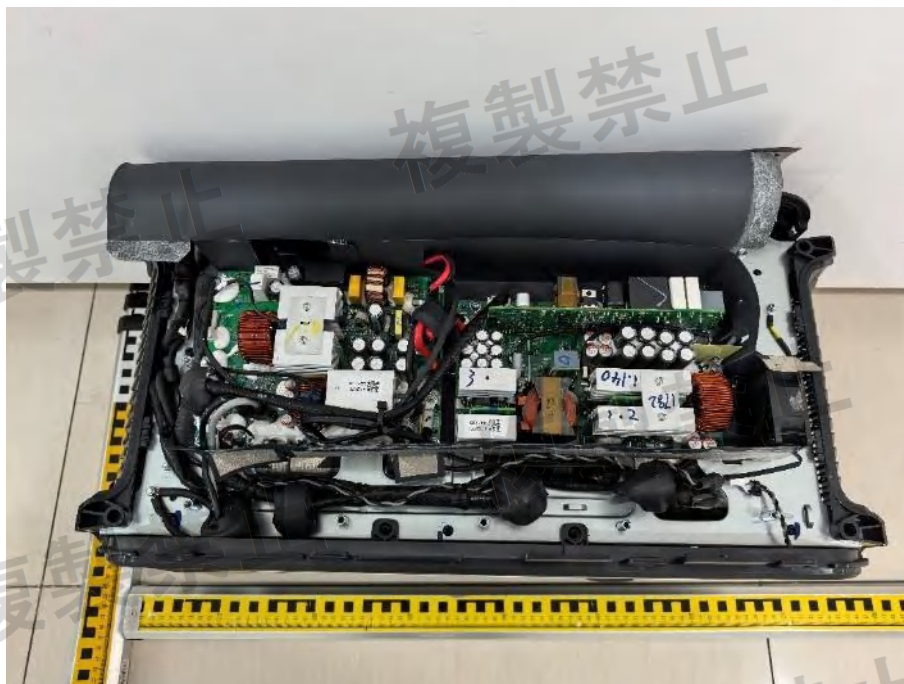


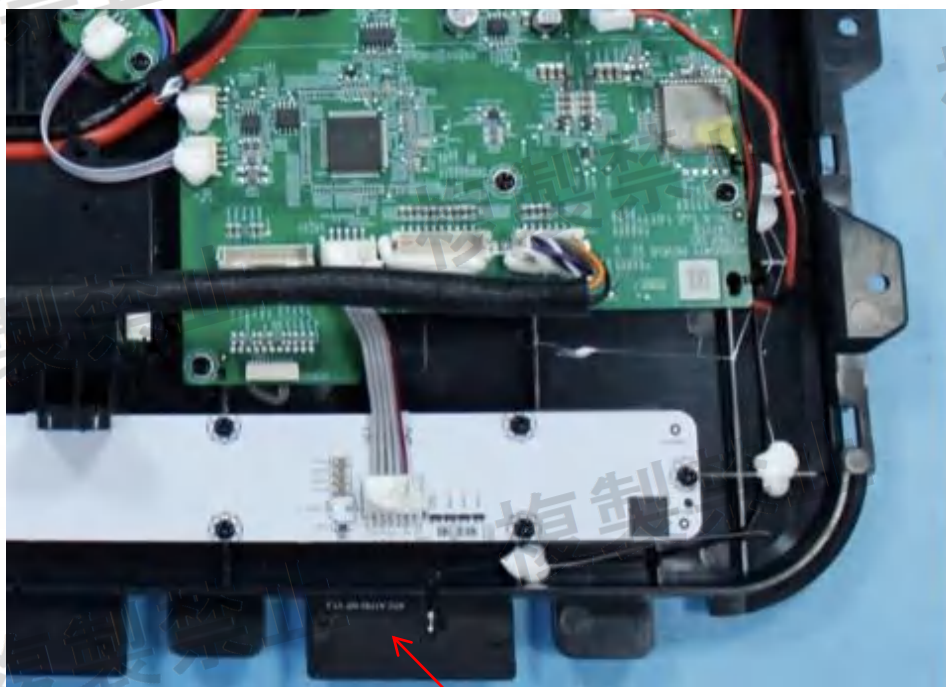


ANT

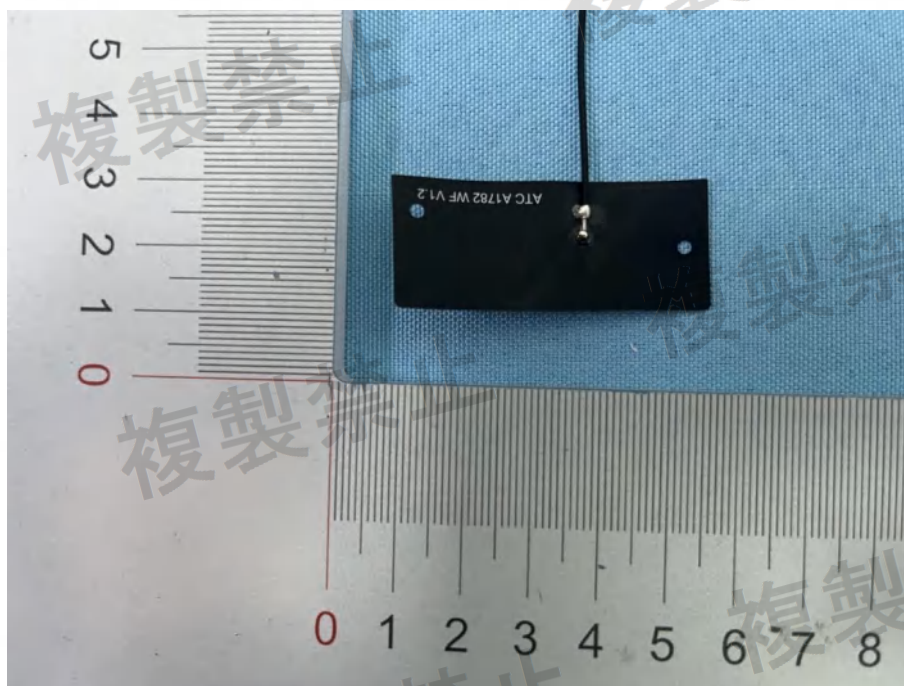


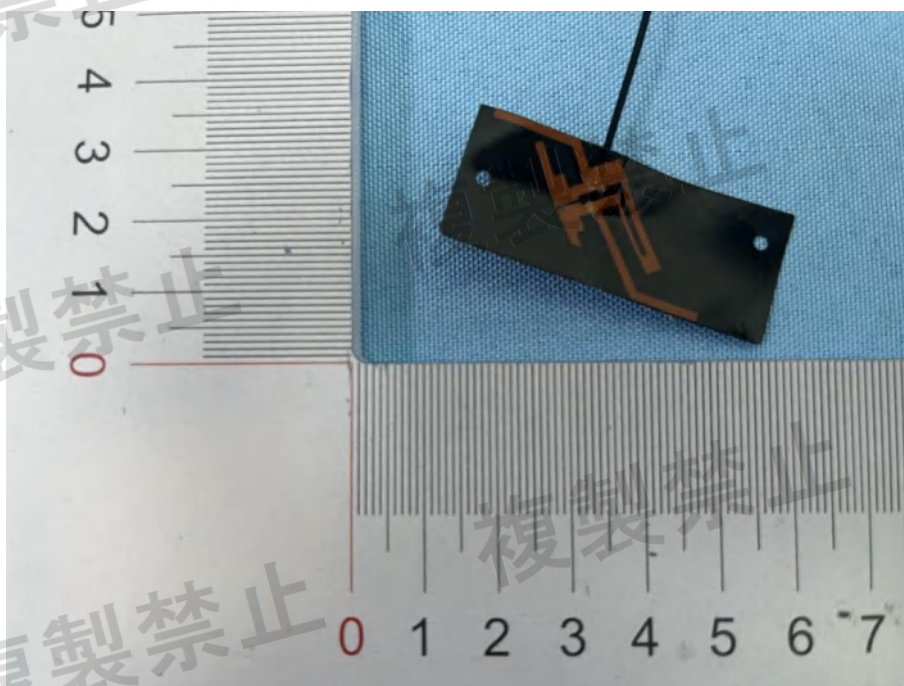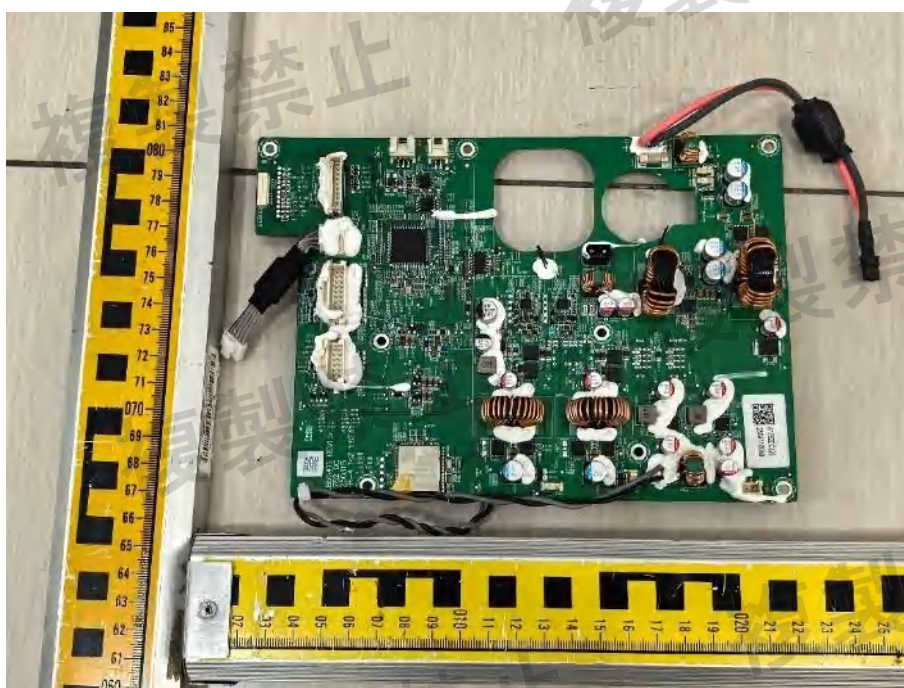


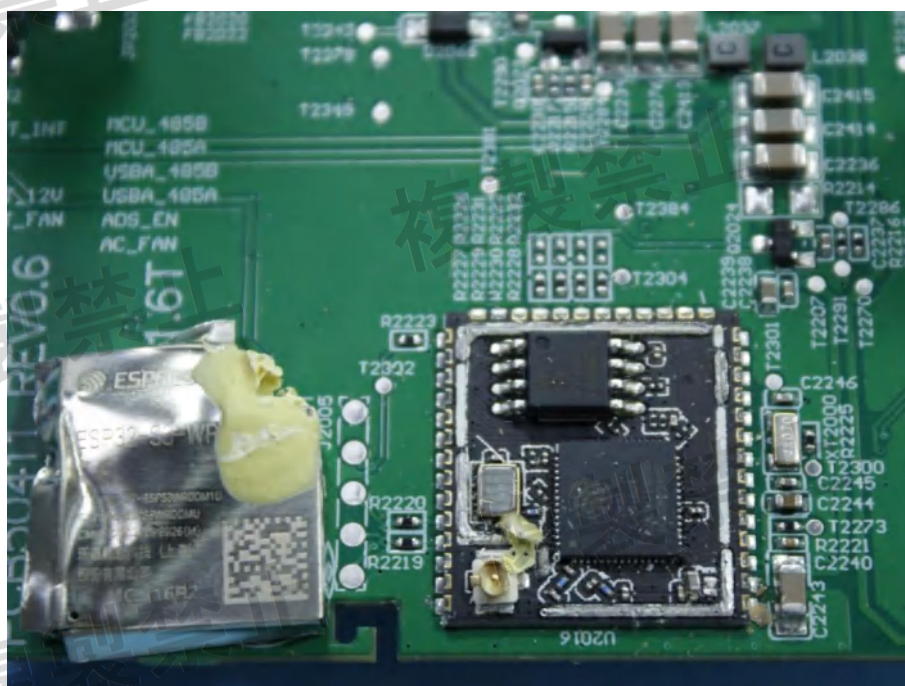




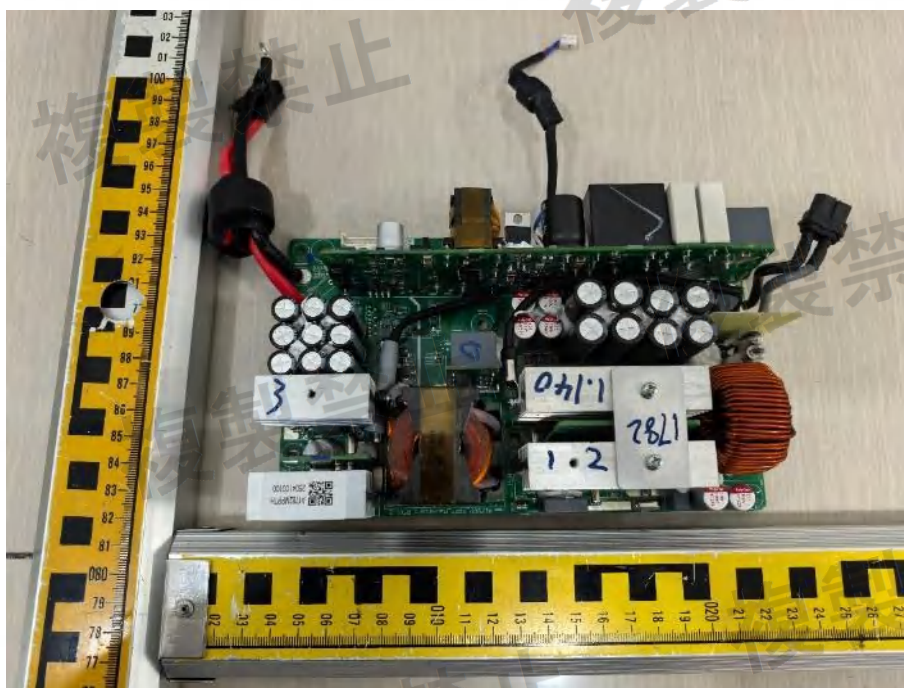


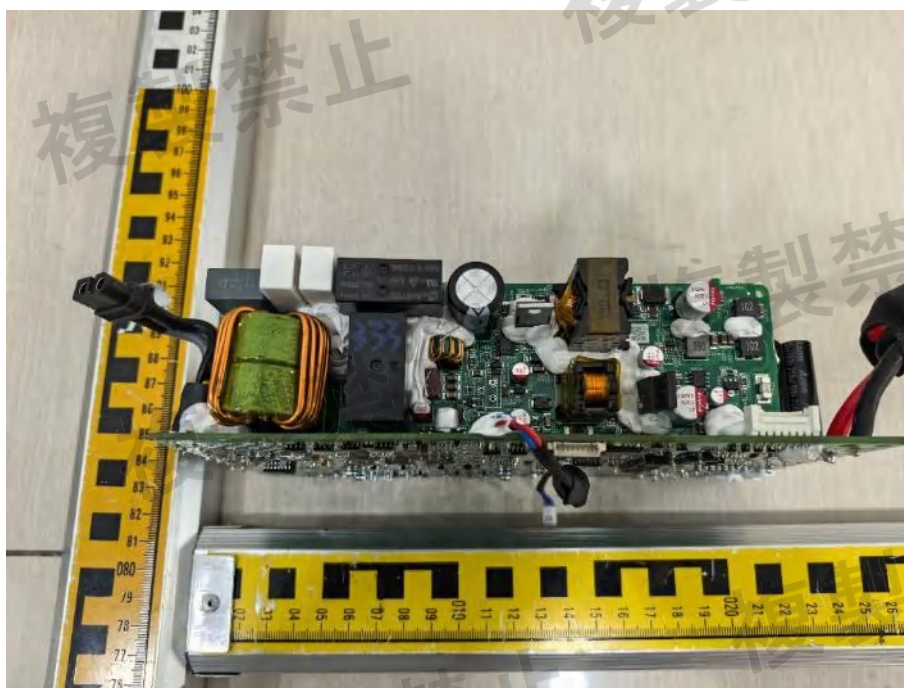



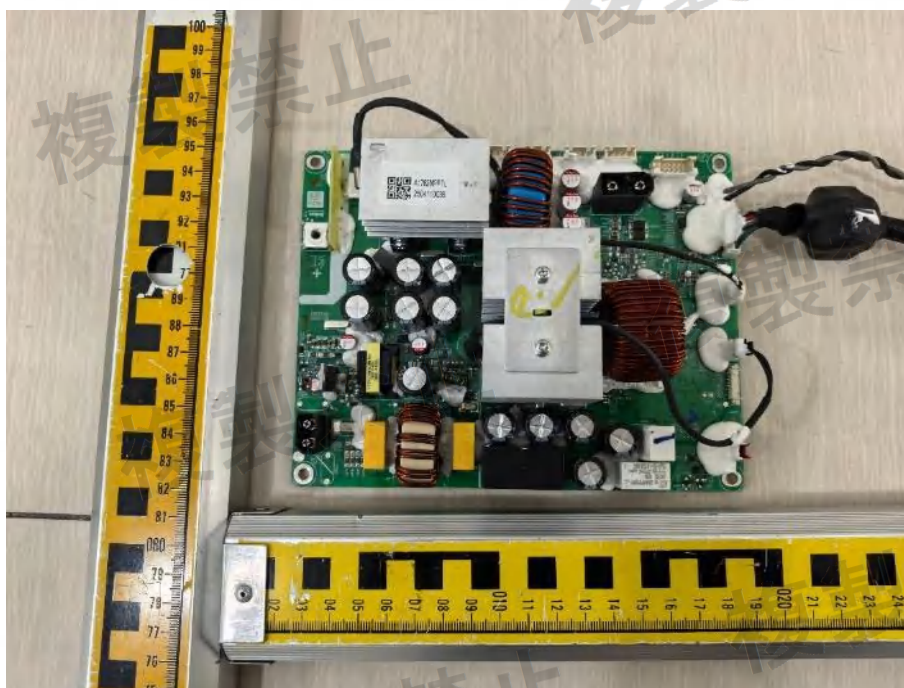








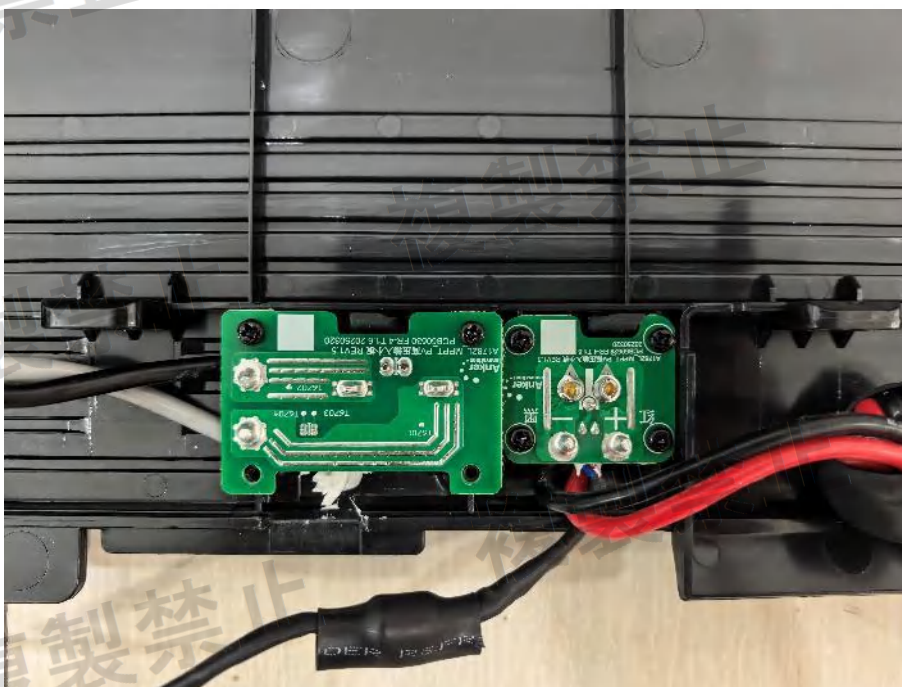
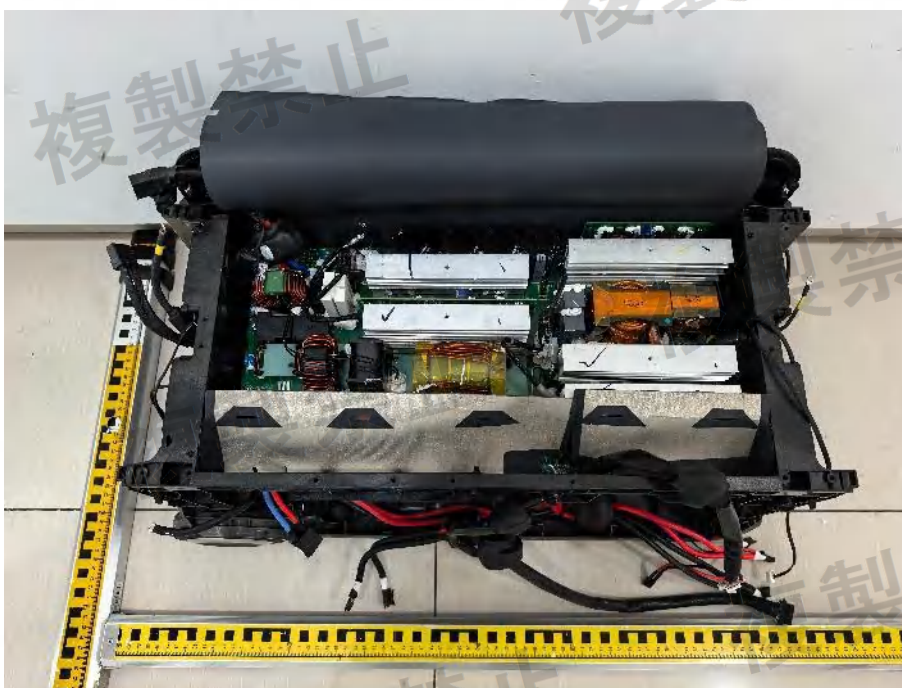


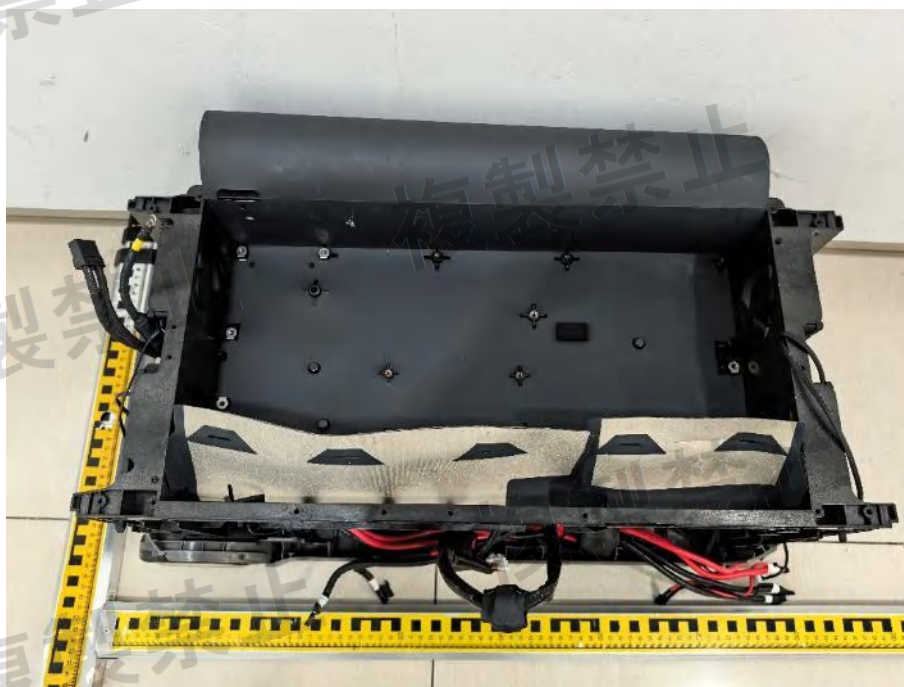

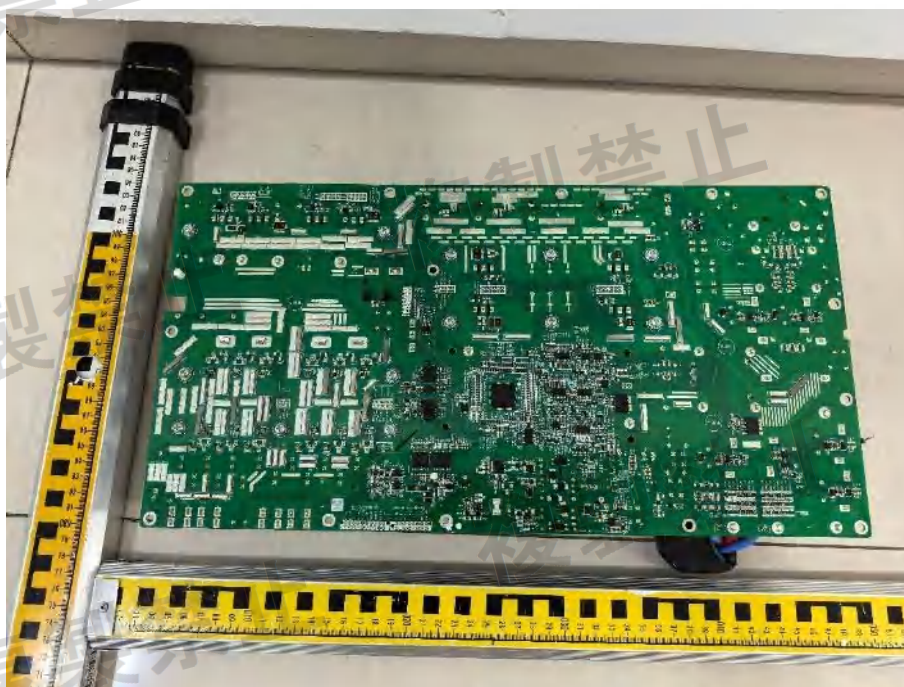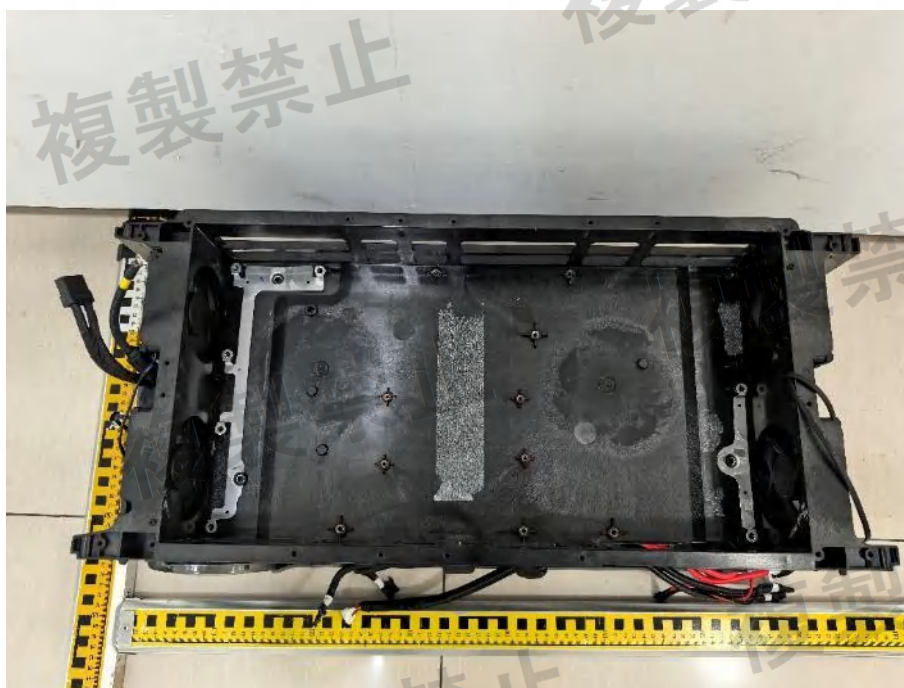



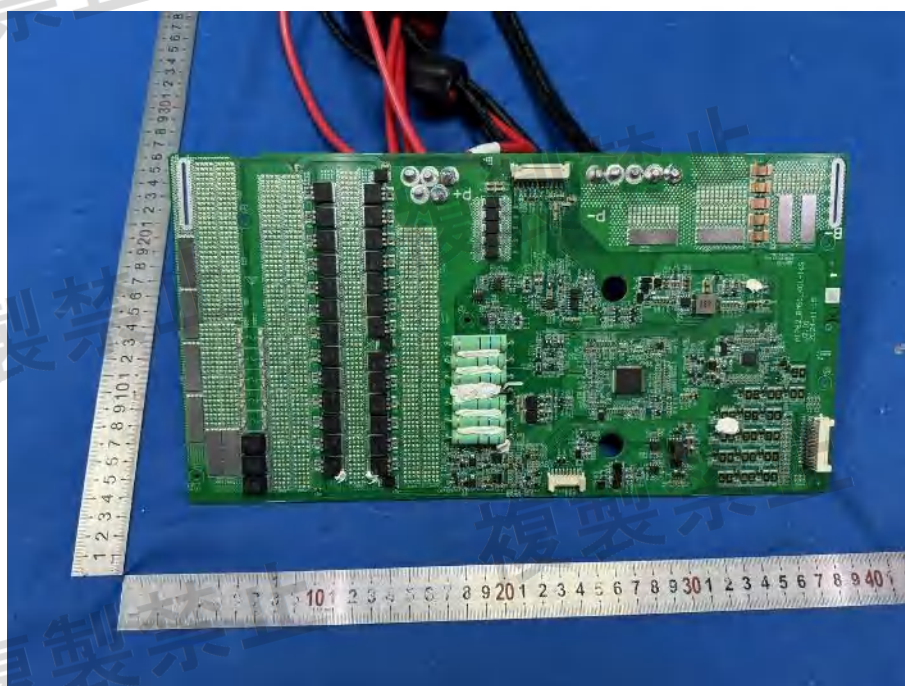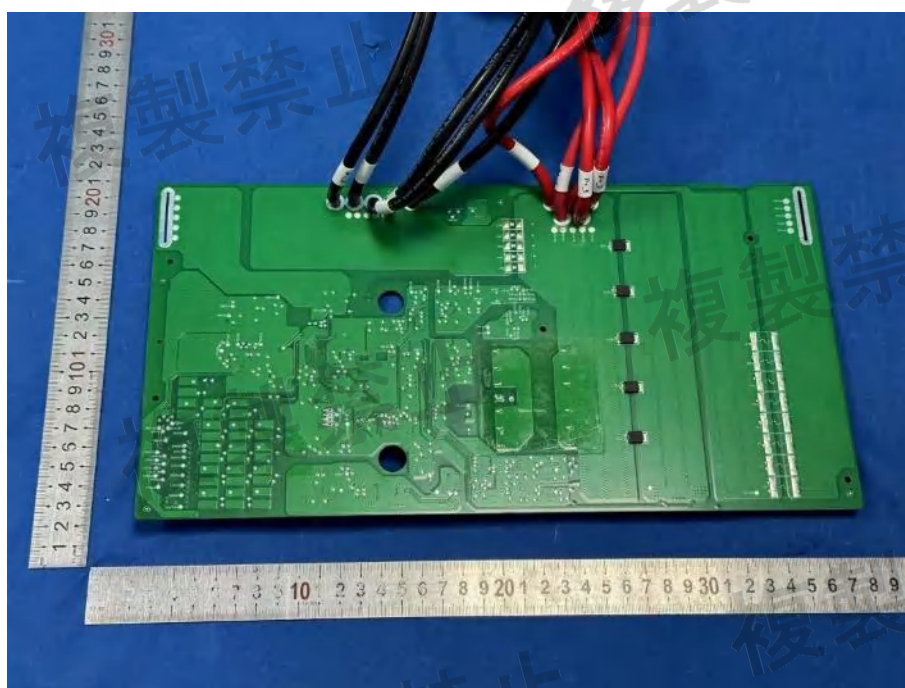

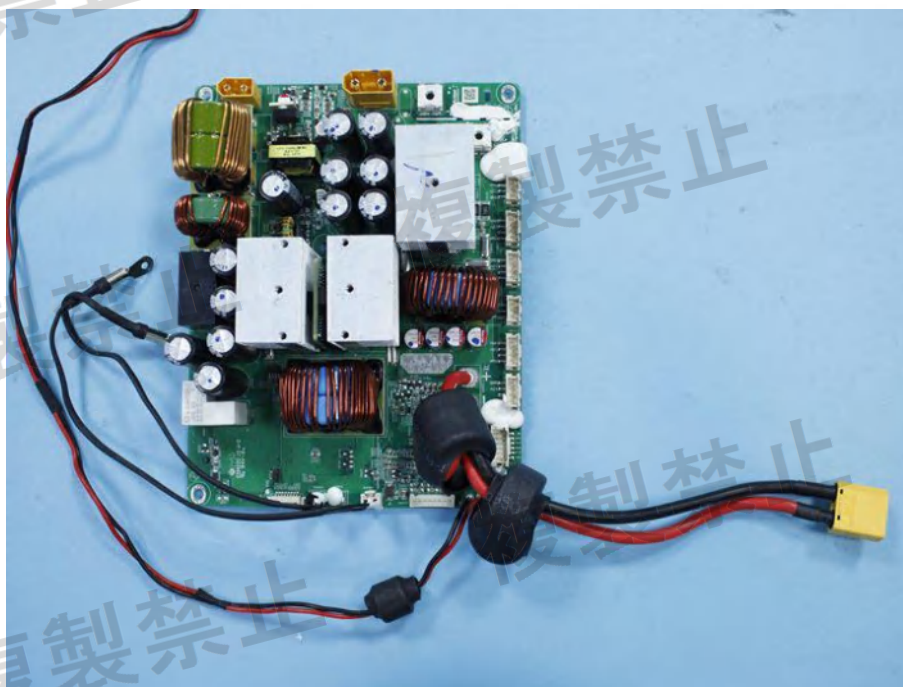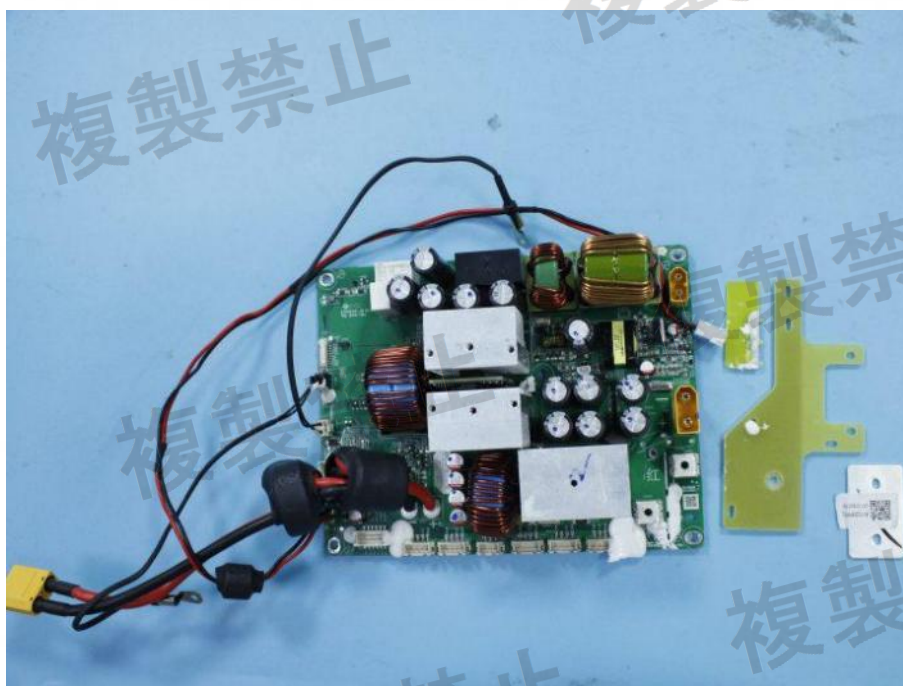



Appendix Test Data

Appendix A: Frequency Error


Test Result


Test Condition	Test Mode	Antenna	Freq.[MHz]	Center Freq [MHz]	Result[ppm]	Limit[ppm]	Verdict
NTNV	CW	Ant1	2402	2402.006	2.49792	±50	PASS
NTNV	CW	Ant1	2440	2440.006	2.45902	±50	PASS
NTNV	CW	Ant1	2480	2480.006	2.41936	±50	PASS

Note: Result[ppm]= (Center Freq[MHz] -Freq.[MHz])/Freq.[MHz]*1000000



Test Graphs

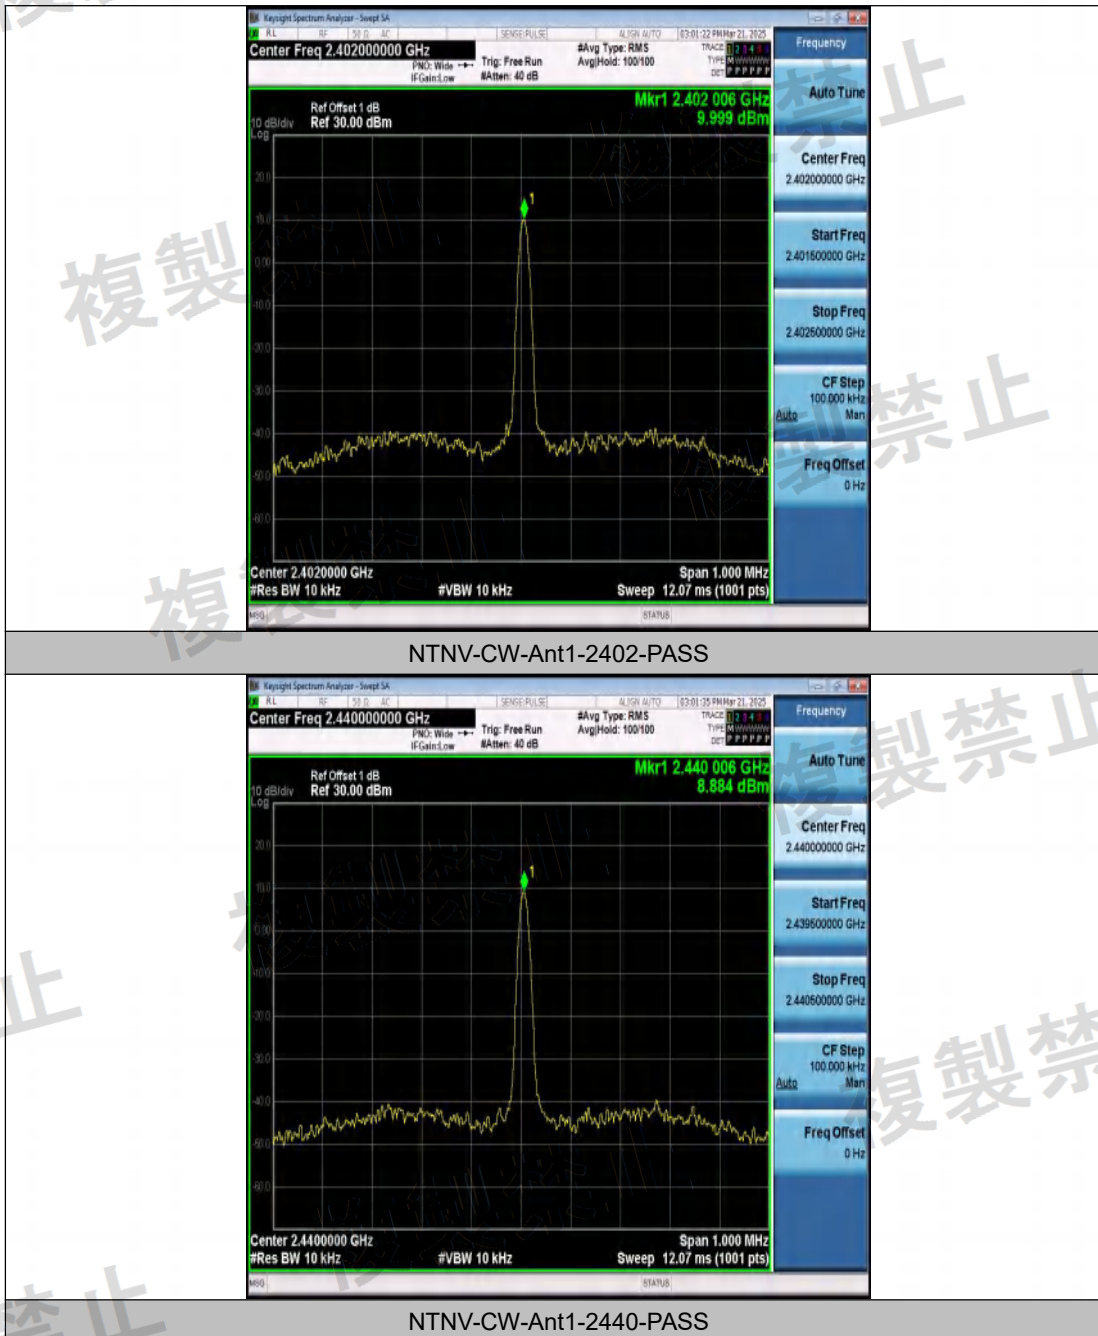

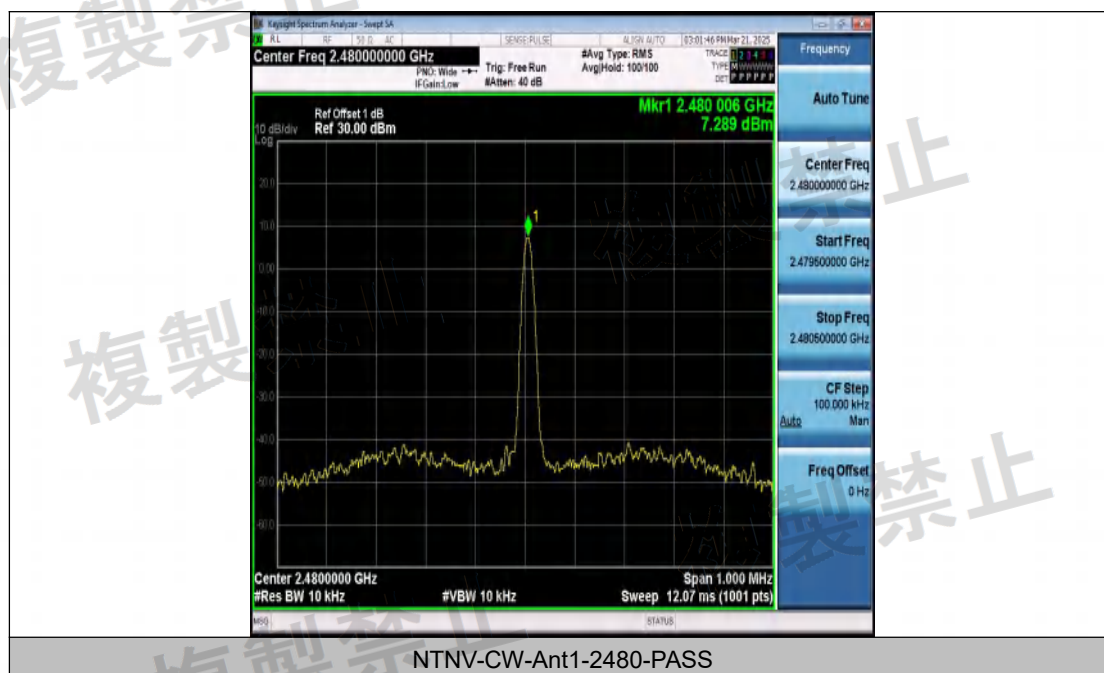

Appendix B: Antenna Power

Test Result

Test Condition	Test Mode	Antenna	Freq. [MHz]	Result[dBm]	Result[mW]	Limit [mW]	Verdict
NTNV	BLE_1M	Ant1	2402	0.83	1.2106	≤10	PASS
NTNV	BLE_1M	Ant1	2440	1.87	1.5382	≤10	PASS
NTNV	BLE_1M	Ant1	2480	2.40	1.7378	≤10	PASS
NTNV	BLE_2M	Ant1	2402	0.69	1.1722	≤10	PASS
NTNV	BLE_2M	Ant1	2440	1.84	1.5276	≤10	PASS
NTNV	BLE_2M	Ant1	2480	2.38	1.7298	≤10	PASS

Note: $\text{Result(mW)} = 10^{(\text{Test Result(dBm)}/10)}$

Test Condition	Test Mode	Antenna	Freq. [MHz]	Power [mW]	Rated Power [mW]	Result [%]	Limit(%)	Verdict
NTNV	BLE_1M	Ant1	2402	1.2106	2	-39.47	+20	PASS
NTNV	BLE_1M	Ant1	2440	1.5382	2	-23.09	+20	PASS
NTNV	BLE_1M	Ant1	2480	1.7378	2	-13.11	+20	PASS
NTNV	BLE_2M	Ant1	2402	1.1722	2	-41.39	+20	PASS
NTNV	BLE_2M	Ant1	2440	1.5276	2	-23.62	+20	PASS
NTNV	BLE_2M	Ant1	2480	1.7298	2	-13.51	+20	PASS


Test Condition	Test Mode	Antenna	Freq. [MHz]	Result[dBm]	EIRP[dBm]	Limit[dBm]	Verdict
NTNV	BLE_1M	Ant1	2402	0.83	4.61	≤12.14	PASS
NTNV	BLE_1M	Ant1	2440	1.87	5.65	≤12.14	PASS
NTNV	BLE_1M	Ant1	2480	2.40	6.18	≤12.14	PASS
NTNV	BLE_2M	Ant1	2402	0.69	4.47	≤12.14	PASS
NTNV	BLE_2M	Ant1	2440	1.84	5.62	≤12.14	PASS
NTNV	BLE_2M	Ant1	2480	2.38	6.16	≤12.14	PASS


Note:


$\text{EIRP}((\text{dBm/MHz})) = \text{Result(dBm)} + \text{Gain(dBi)}$




Test Graphs

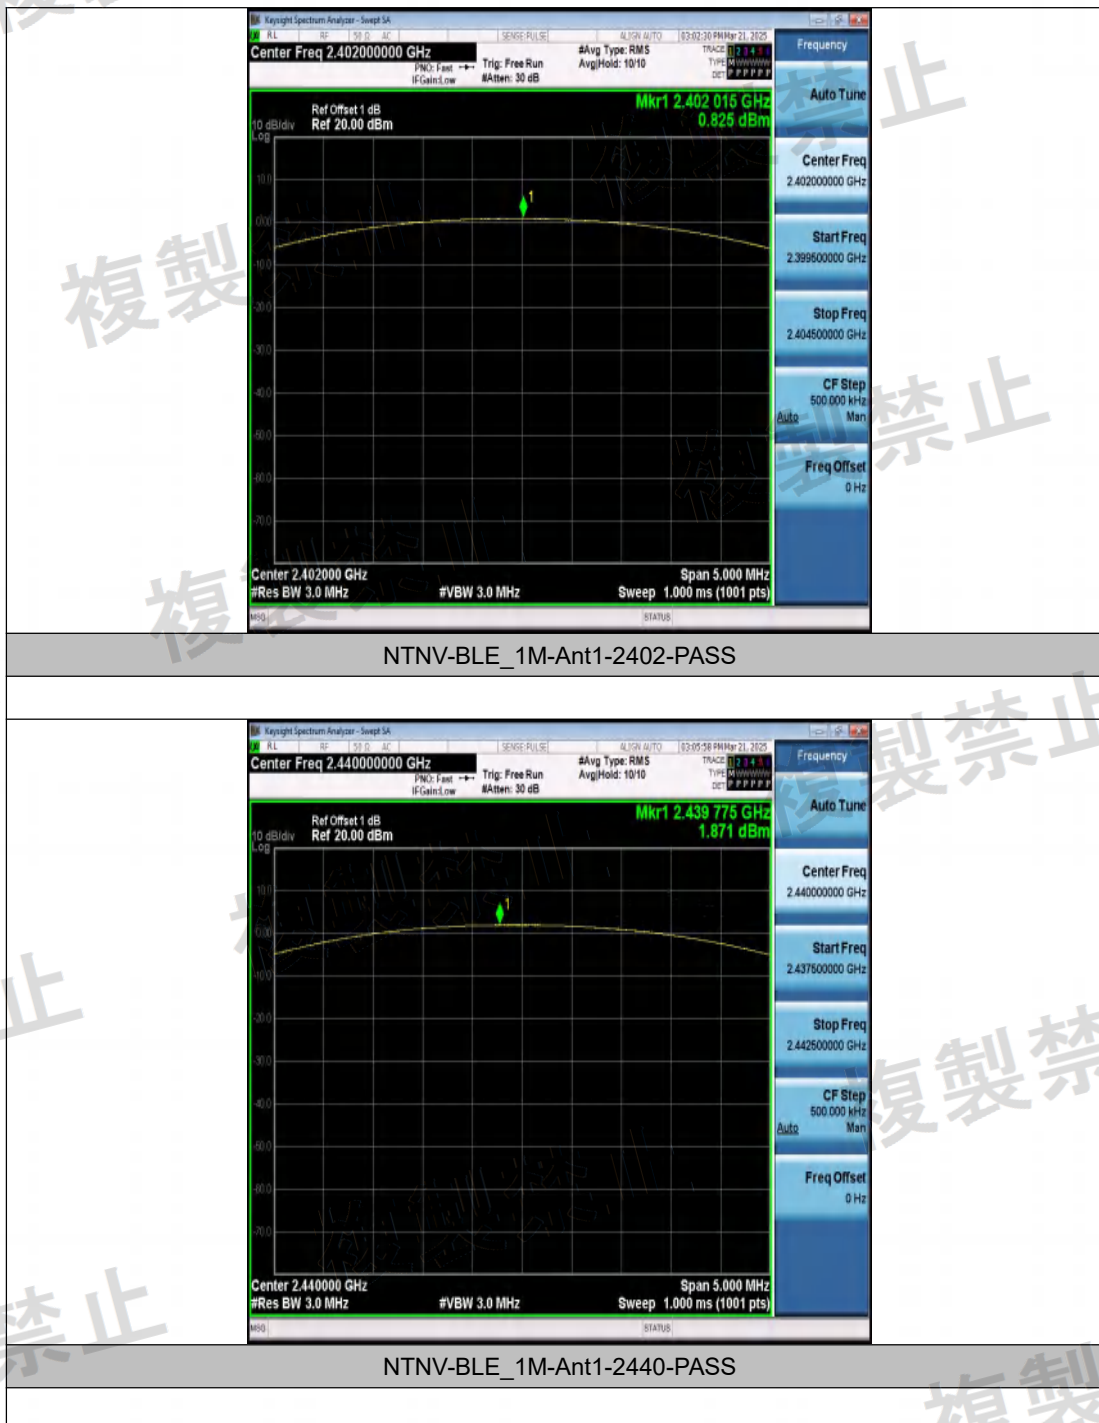

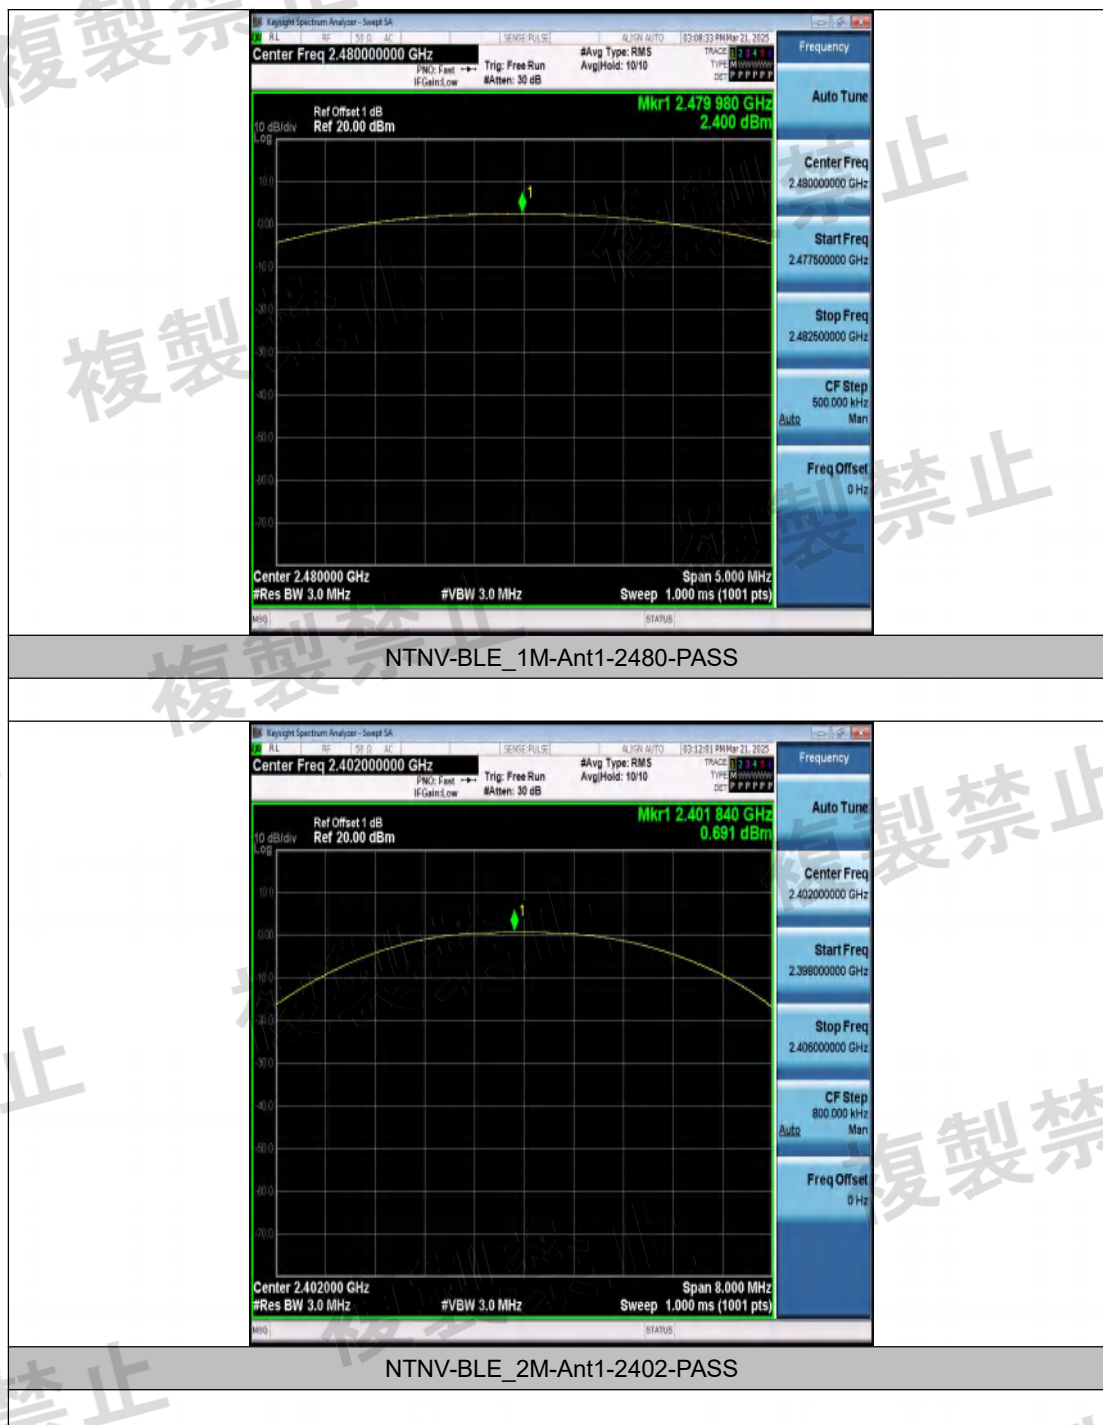

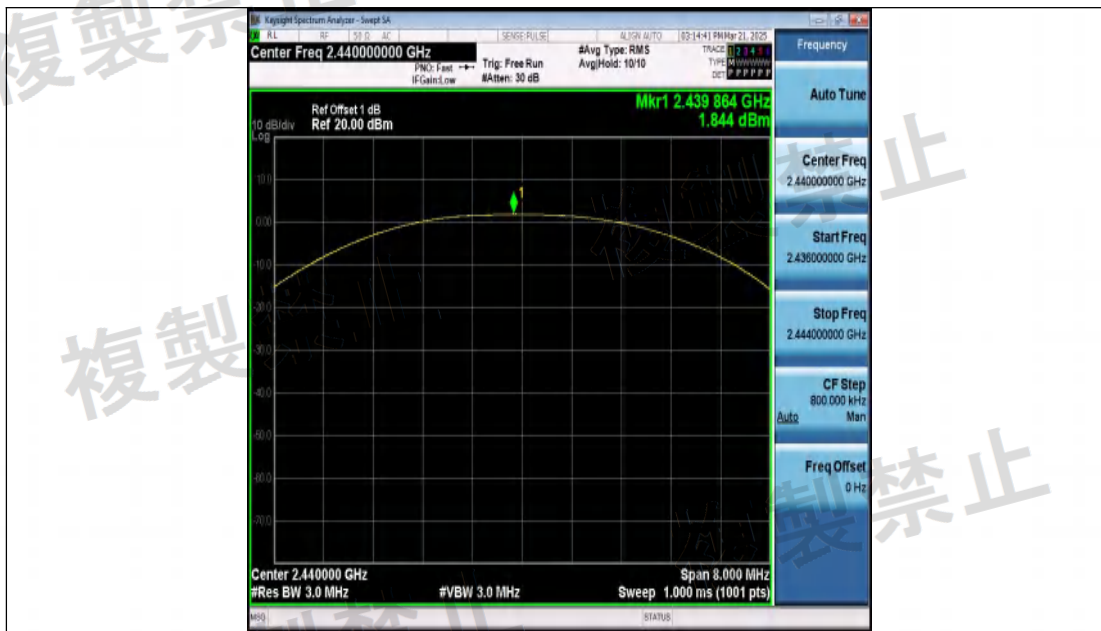

NTNV-BLE_2M-Ant1-2440-PASS

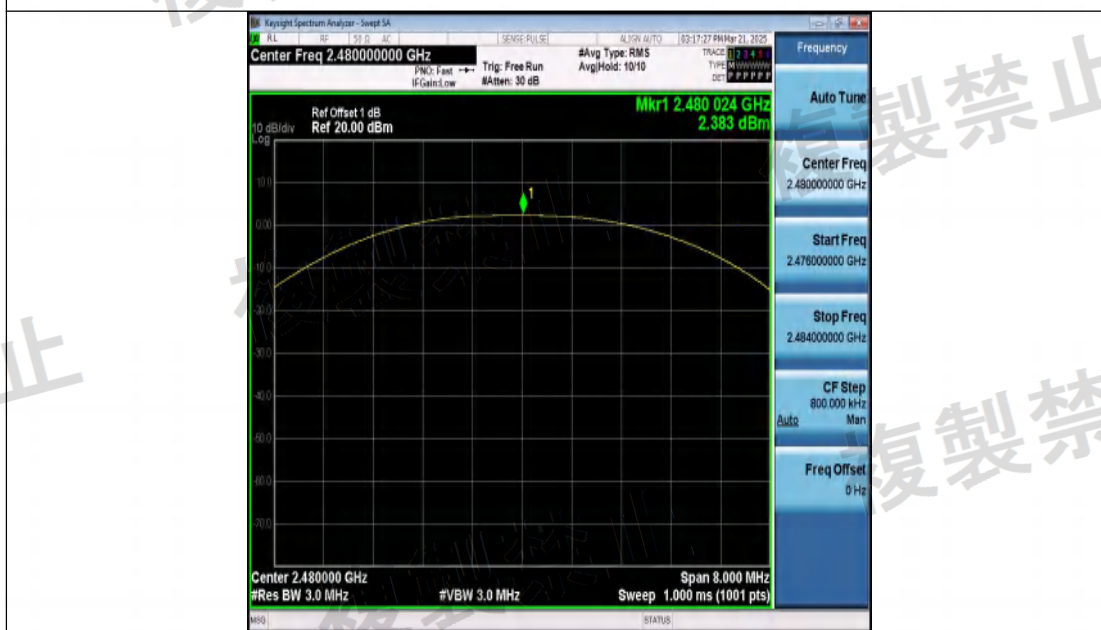

NTNV-BLE_2M-Ant1-2480-PASS




Appendix C: Occupied Bandwidth


Test Result


TestCondition	TestMode	Antenna	Freq.[MHz]	Result[MHz]	Limit [MHz]	Verdict
NTNV	BLE_1M	Ant1	2402	1.216	≤26	PASS
NTNV	BLE_1M	Ant1	2440	1.215	≤26	PASS
NTNV	BLE_1M	Ant1	2480	1.214	≤26	PASS
NTNV	BLE_2M	Ant1	2402	2.127	≤26	PASS
NTNV	BLE_2M	Ant1	2440	2.124	≤26	PASS
NTNV	BLE_2M	Ant1	2480	2.124	≤26	PASS




Test Graphs

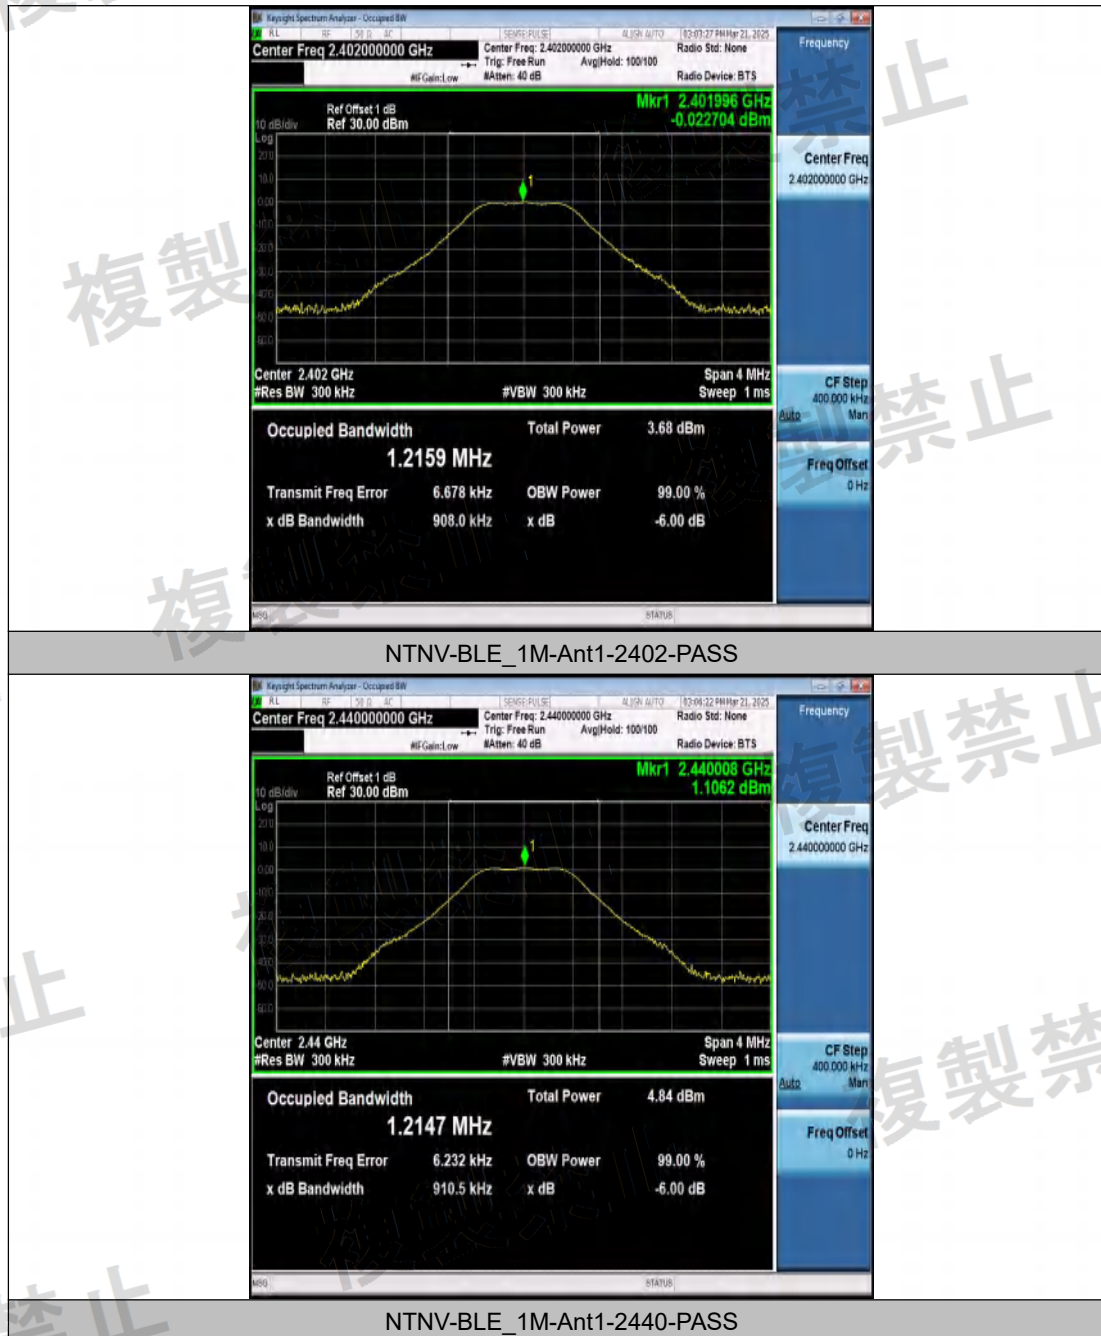

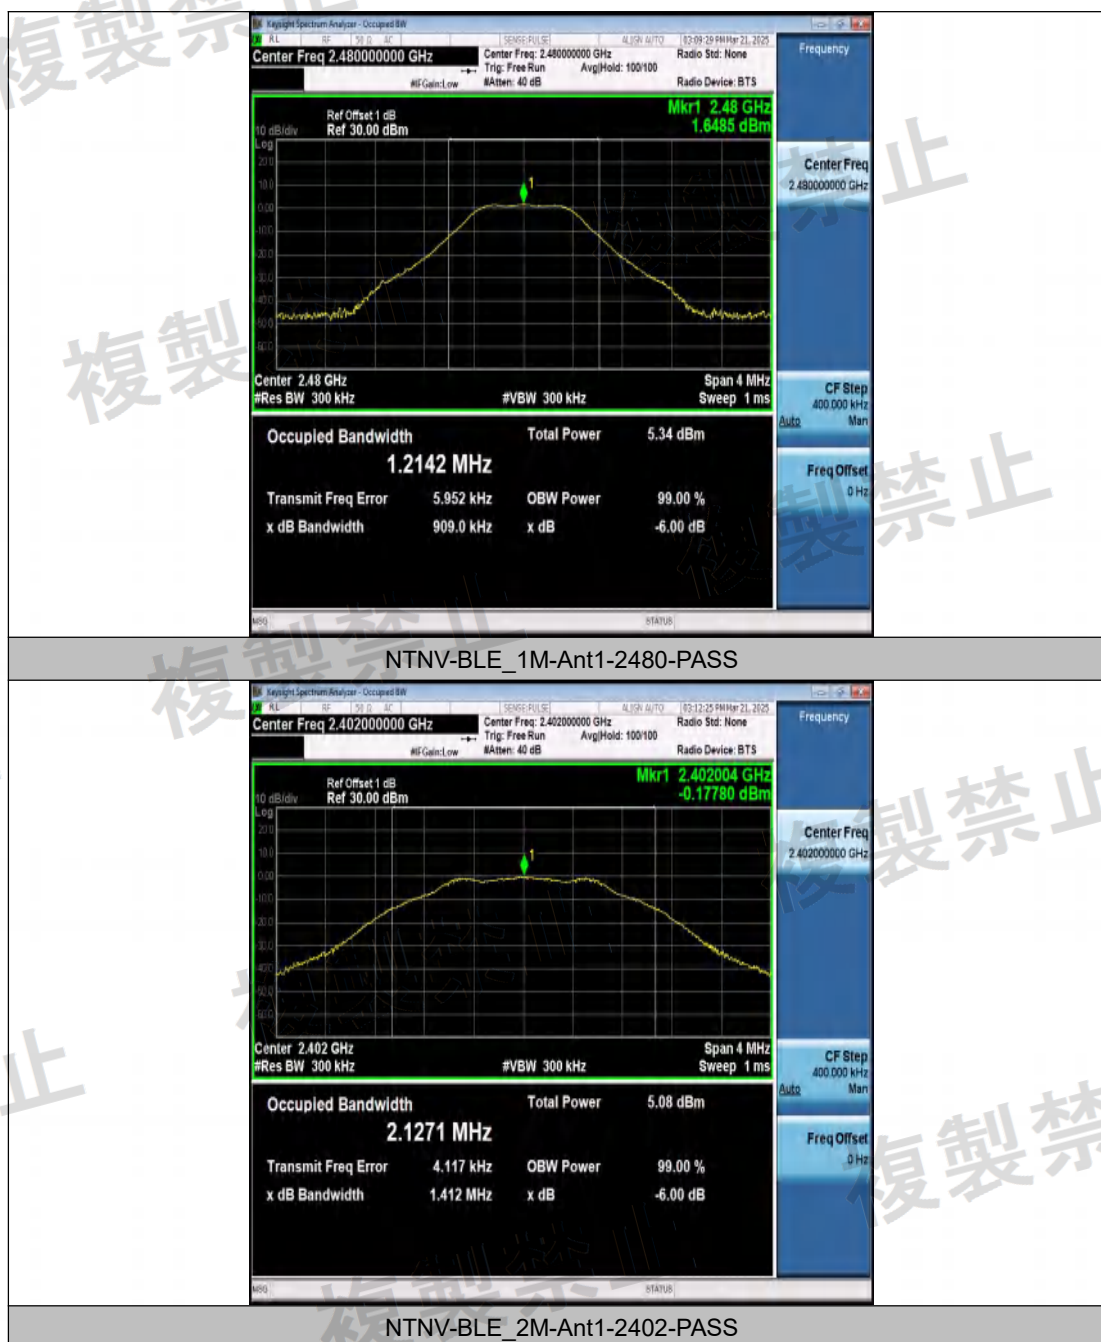

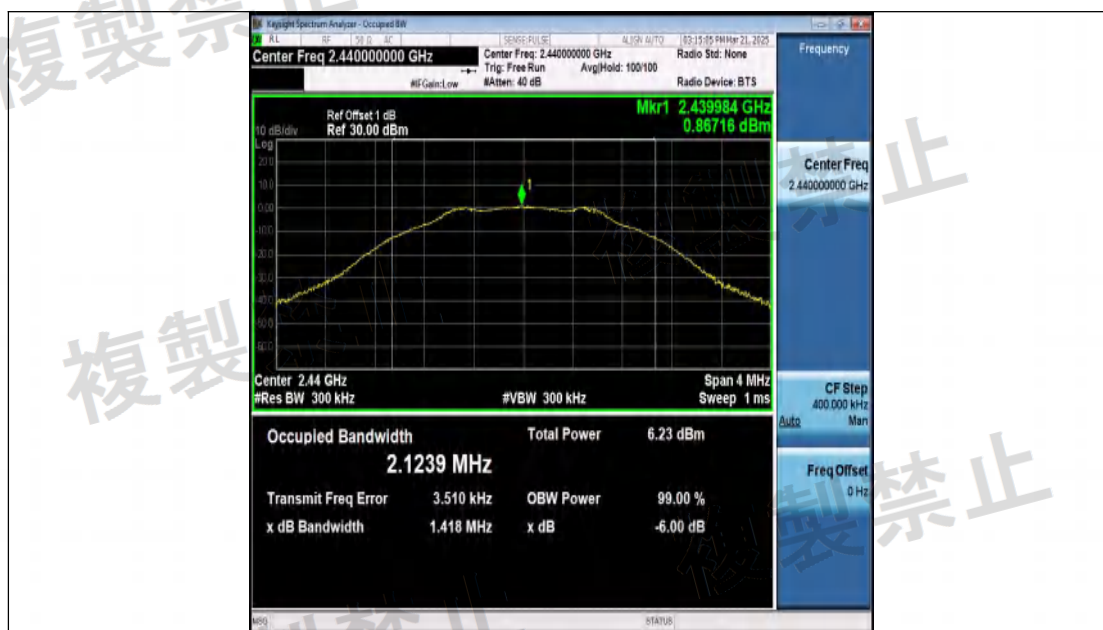

NTNV-BLE_2M-Ant1-2440-PASS

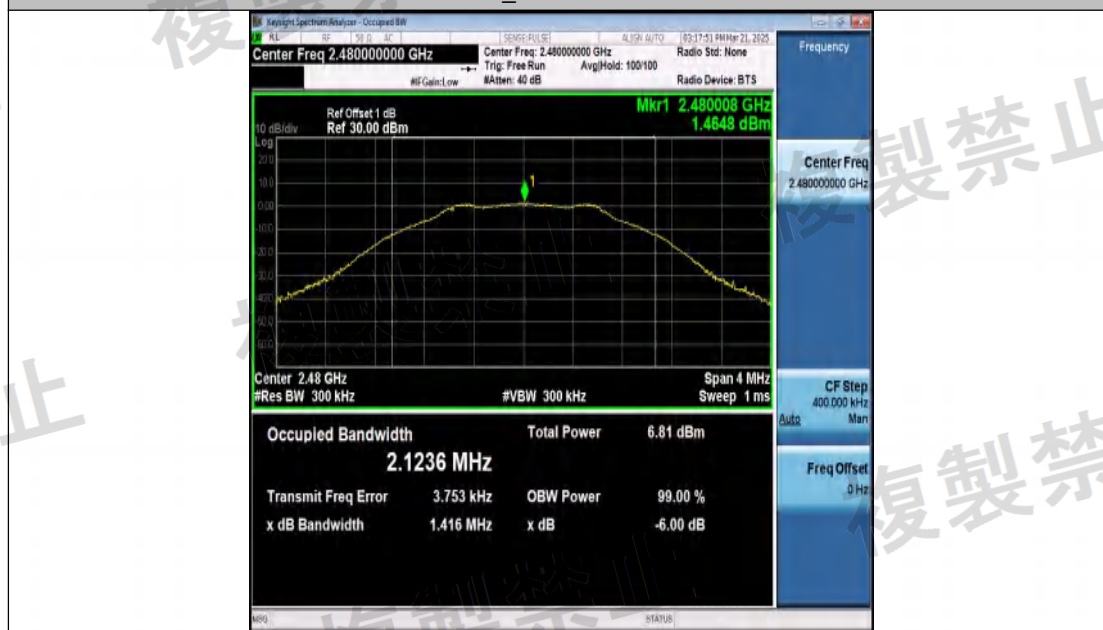

NTNV-BLE_2M-Ant1-2480-PASS




Appendix D: Spurious Emission of TX


Test Result


Test Condition	Test Mode	Antenna	Freq. [MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [μW/MHz]	Limit [μW/MHz]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	186.90	-57.67	≤-26	0.00171	≤2.5	PASS
NTNV	BLE_1M	Ant1	2402	1000~2387	2385.96	-56.38	≤-26	0.00230	≤2.5	PASS
NTNV	BLE_1M	Ant1	2402	2387~2400	2399.99	-36.16	≤-16	0.24210	≤25	PASS
NTNV	BLE_1M	Ant1	2402	2483.5~2496.5	2493.71	-56.36	≤-16	0.00231	≤25	PASS
NTNV	BLE_1M	Ant1	2402	2496.5~13000	5768.87	-56.09	≤-26	0.00246	≤2.5	PASS
NTNV	BLE_1M	Ant1	2440	30~1000	809.40	-58.21	≤-26	0.00151	≤2.5	PASS
NTNV	BLE_1M	Ant1	2440	1000~2387	2378.68	-55.84	≤-26	0.00261	≤2.5	PASS
NTNV	BLE_1M	Ant1	2440	2387~2400	2399.93	-53.59	≤-16	0.00438	≤25	PASS
NTNV	BLE_1M	Ant1	2440	2483.5~2496.5	2487.93	-56.62	≤-16	0.00218	≤25	PASS
NTNV	BLE_1M	Ant1	2440	2496.5~13000	5751.01	-54.07	≤-26	0.00392	≤2.5	PASS
NTNV	BLE_1M	Ant1	2480	30~1000	211.63	-58.42	≤-26	0.00144	≤2.5	PASS
NTNV	BLE_1M	Ant1	2480	1000~2387	2354.75	-56.52	≤-26	0.00223	≤2.5	PASS
NTNV	BLE_1M	Ant1	2480	2387~2400	2399.96	-53.14	≤-16	0.00485	≤25	PASS
NTNV	BLE_1M	Ant1	2480	2483.5~2496.5	2484.55	-48.81	≤-16	0.01315	≤25	PASS
NTNV	BLE_1M	Ant1	2480	2496.5~13000	3306.32	-55.84	≤-26	0.00261	≤2.5	PASS
NTNV	BLE_2M	Ant1	2402	30~1000	240.01	-58.64	≤-26	0.00137	≤2.5	PASS
NTNV	BLE_2M	Ant1	2402	1000~2387	2360.30	-56.51	≤-26	0.00223	≤2.5	PASS
NTNV	BLE_2M	Ant1	2402	2387~2400	2400.00	-23.82	≤-16	4.14954	≤25	PASS
NTNV	BLE_2M	Ant1	2402	2483.5~2496.5	2484.36	-56.52	≤-16	0.00223	≤25	PASS
NTNV	BLE_2M	Ant1	2402	2496.5~13000	5751.01	-54.58	≤-26	0.00348	≤2.5	PASS
NTNV	BLE_2M	Ant1	2440	30~1000	195.63	-57.89	≤-26	0.00163	≤2.5	PASS
NTNV	BLE_2M	Ant1	2440	1000~2387	2364.81	-56.10	≤-26	0.00245	≤2.5	PASS
NTNV	BLE_2M	Ant1	2440	2387~2400	2399.86	-52.87	≤-16	0.00516	≤25	PASS
NTNV	BLE_2M	Ant1	2440	2483.5~2496.5	2485.74	-56.45	≤-16	0.00226	≤25	PASS
NTNV	BLE_2M	Ant1	2440	2496.5~13000	5264.17	-54.36	≤-26	0.00366	≤2.5	PASS
NTNV	BLE_2M	Ant1	2480	30~1000	255.28	-58.19	≤-26	0.00152	≤2.5	PASS
NTNV	BLE_2M	Ant1	2480	1000~2387	2377.64	-56.61	≤-26	0.00218	≤2.5	PASS
NTNV	BLE_2M	Ant1	2480	2387~2400	2399.97	-52.86	≤-16	0.00518	≤25	PASS
NTNV	BLE_2M	Ant1	2480	2483.5~2496.5	2483.62	-48.68	≤-16	0.01355	≤25	PASS
NTNV	BLE_2M	Ant1	2480	2496.5~13000	12389.22	-55.79	≤-26	0.00264	≤2.5	PASS




Test Graphs

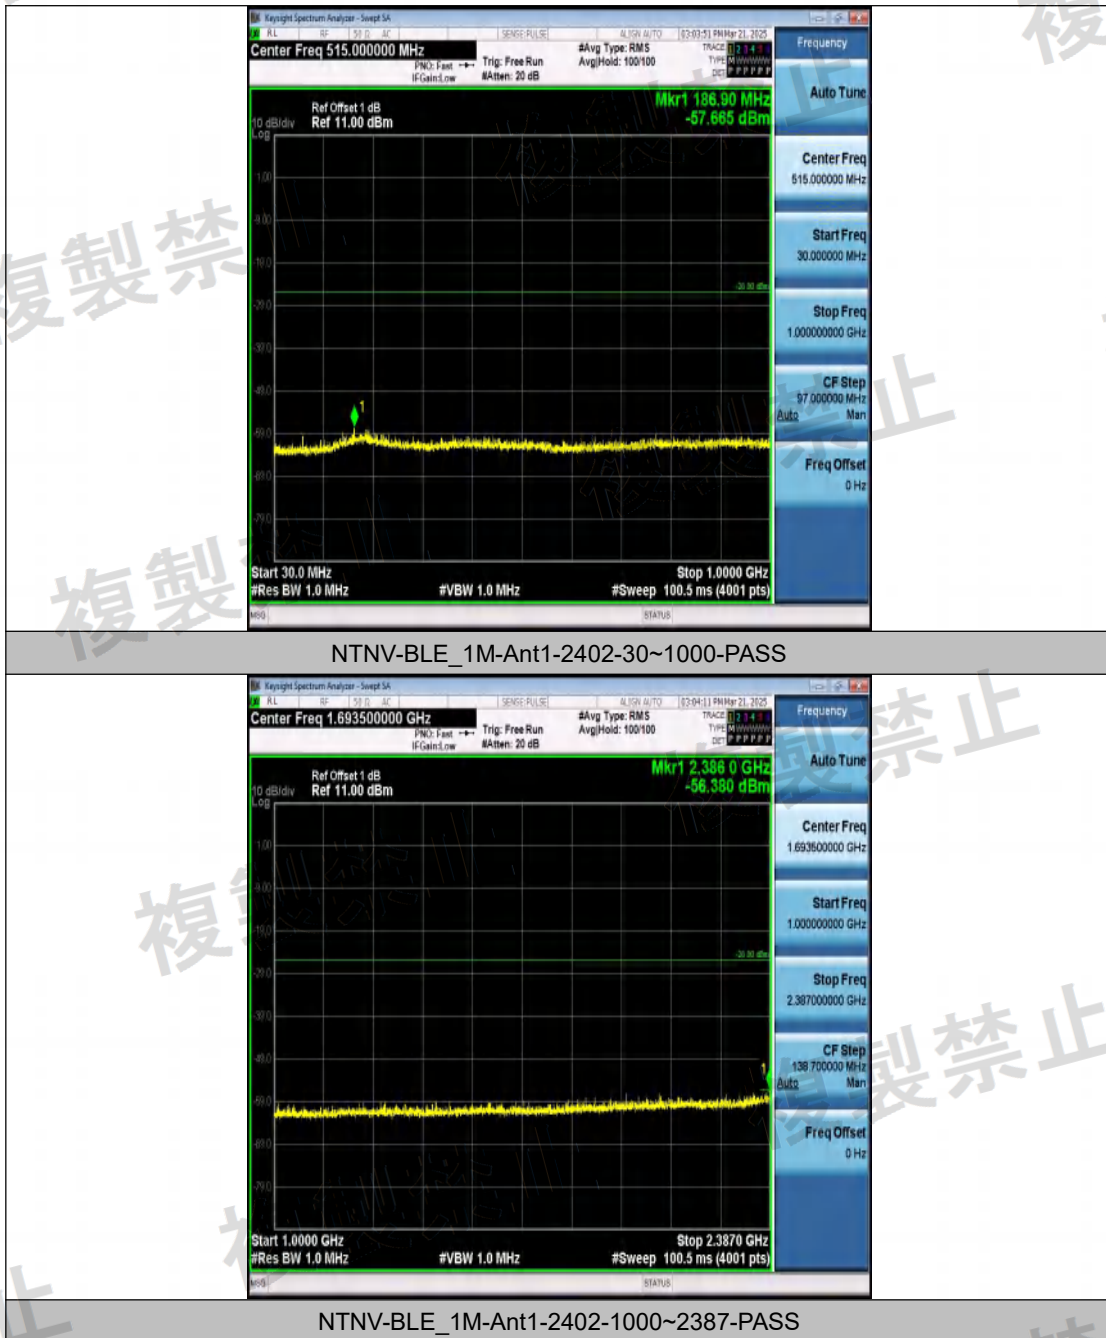

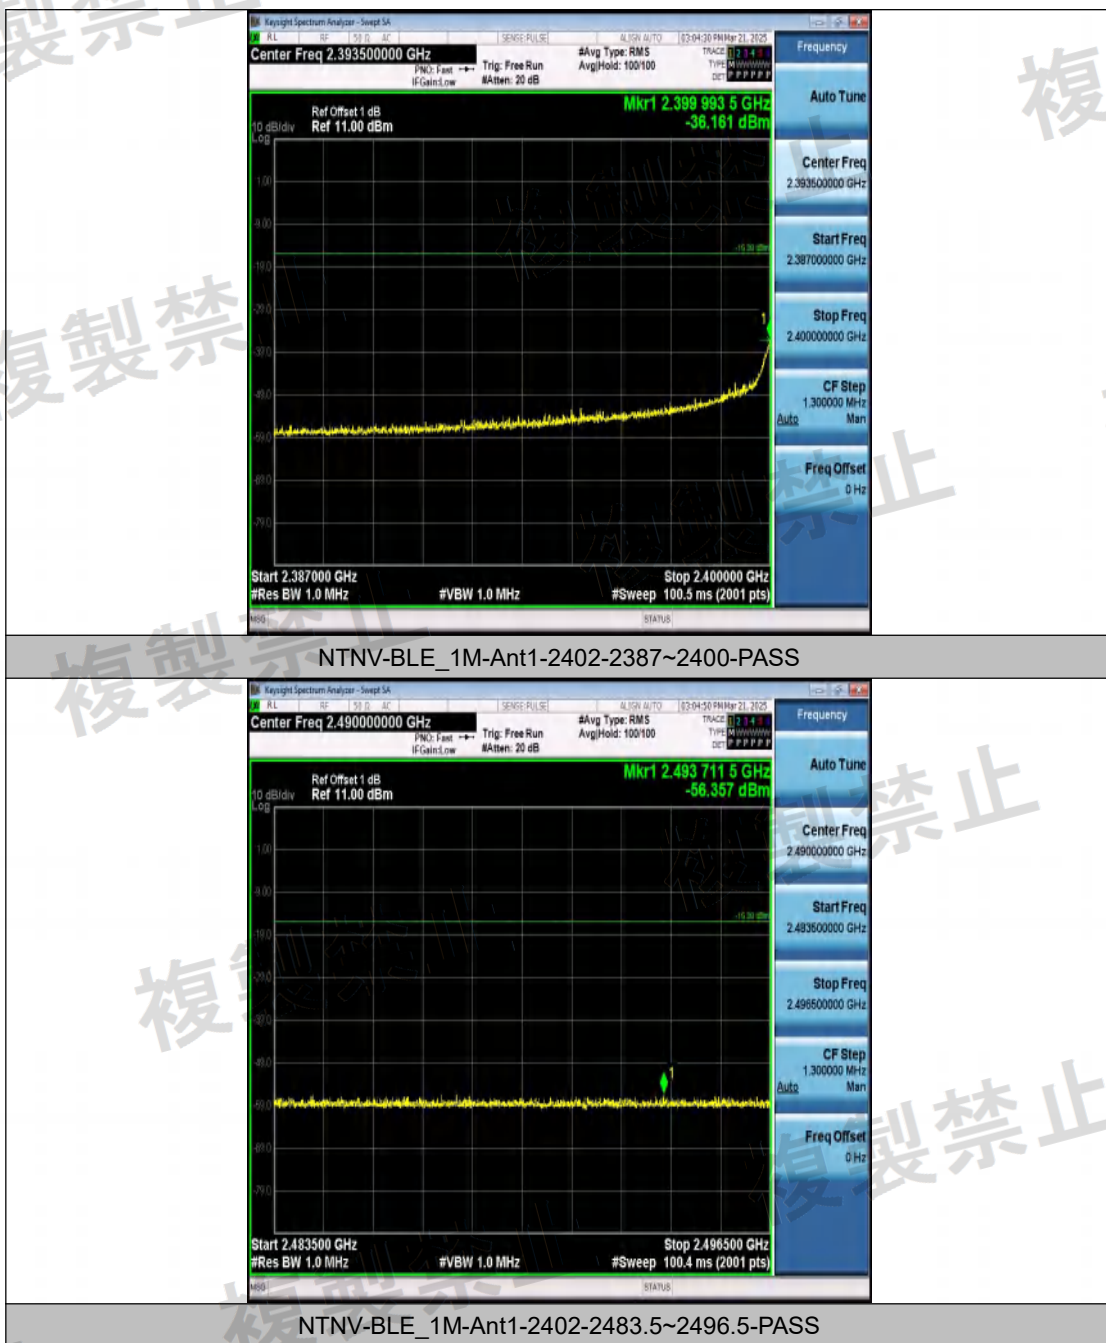

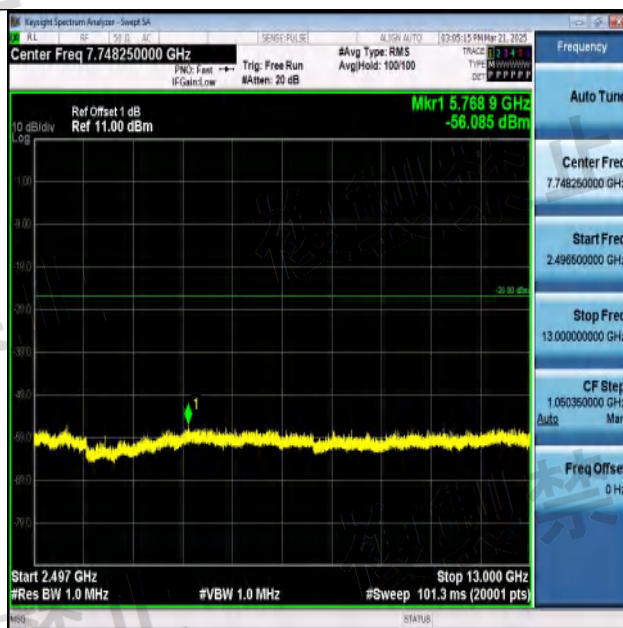


NTNV-BLE_1M-Ant1-2402-2496.5~13000-PASS

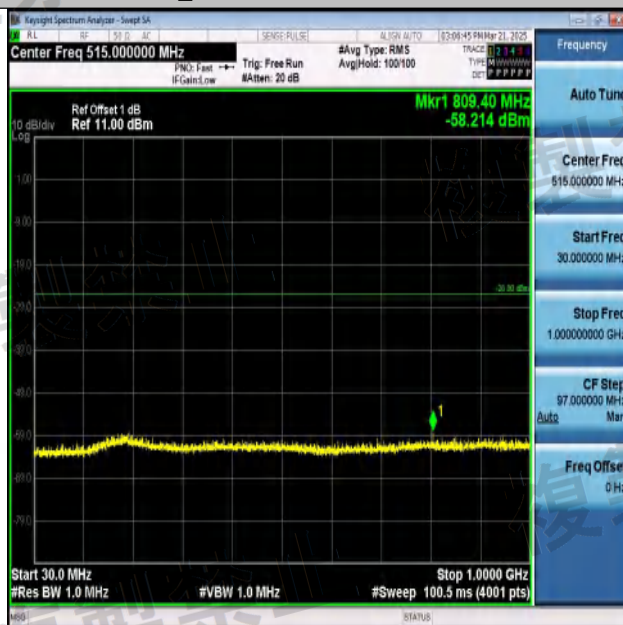


NTNV-BLE_1M-Ant1-2440-30~1000-PASS



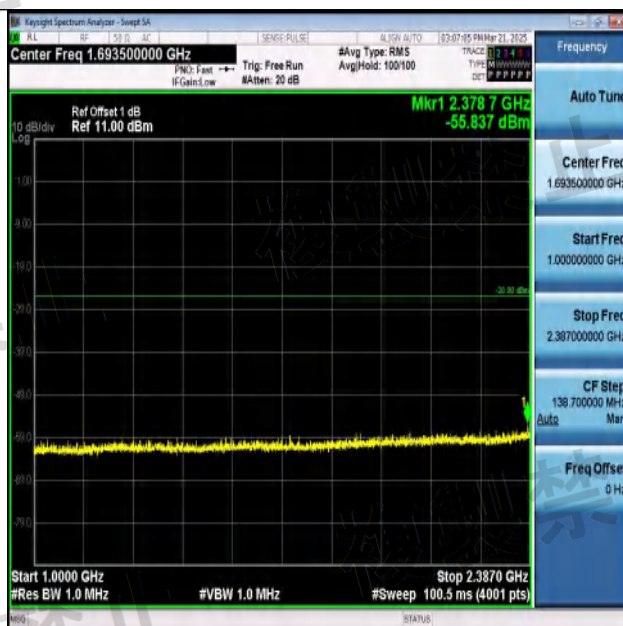


NTNV-BLE_1M-Ant1-2440-1000~2387-PASS

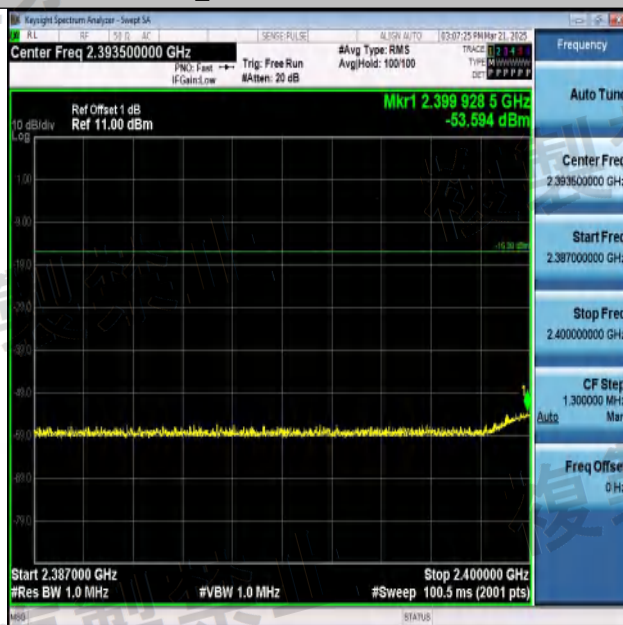


NTNV-BLE_1M-Ant1-2440-2387~2400-PASS



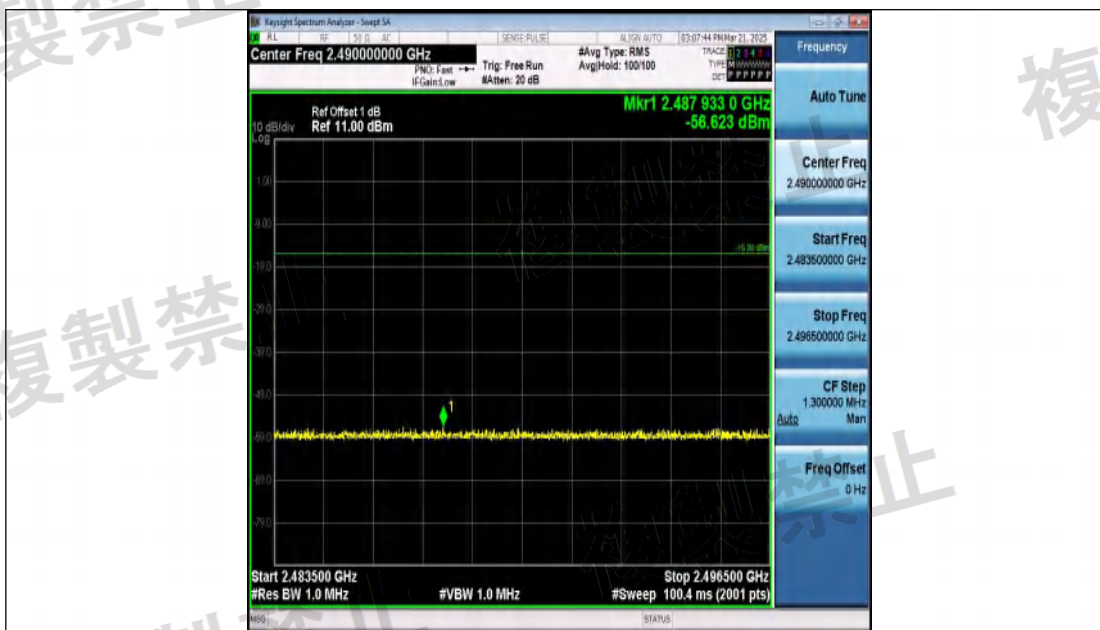


NTNV-BLE_1M-Ant1-2440-2483.5~2496.5-PASS

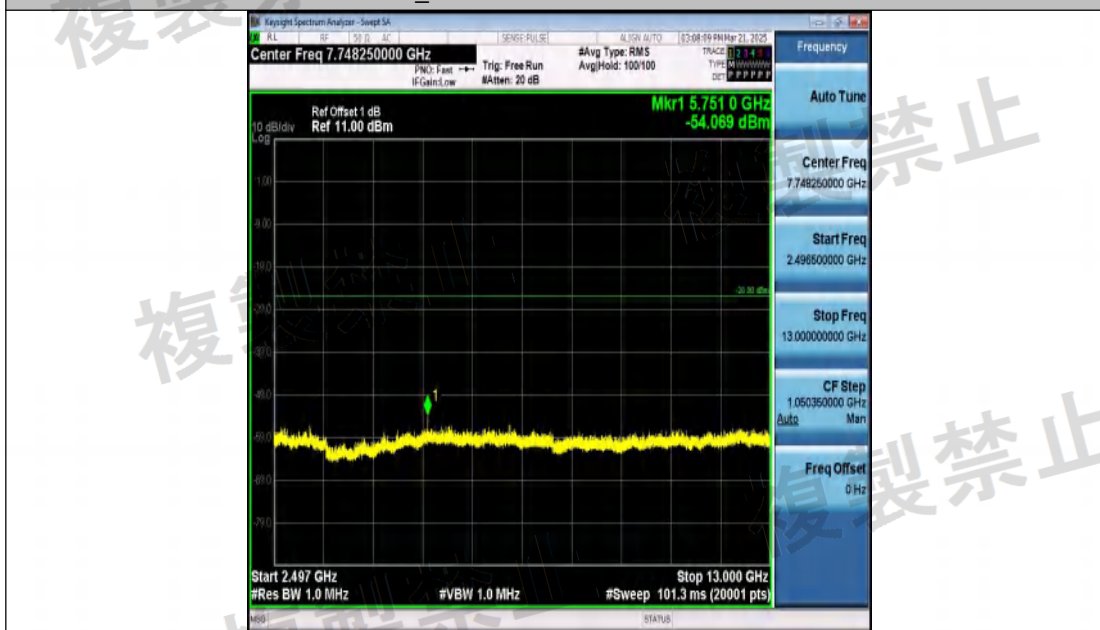


NTNV-BLE_1M-Ant1-2440-2496.5~13000-PASS



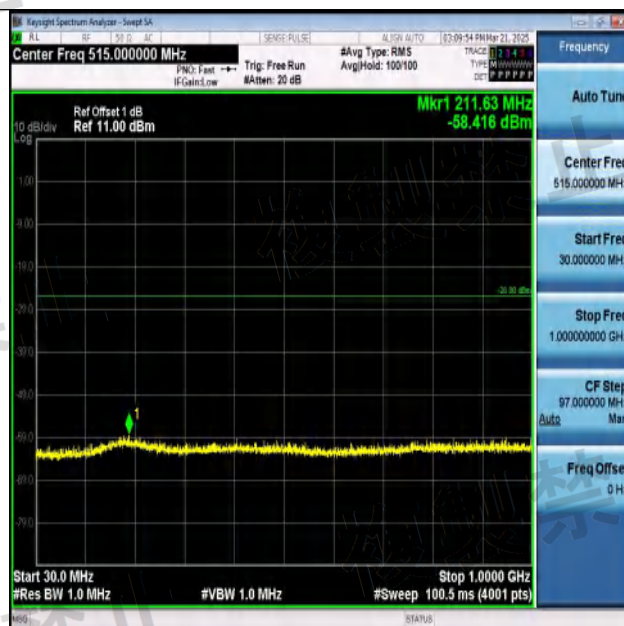


NTNV-BLE_1M-Ant1-2480-30~1000-PASS

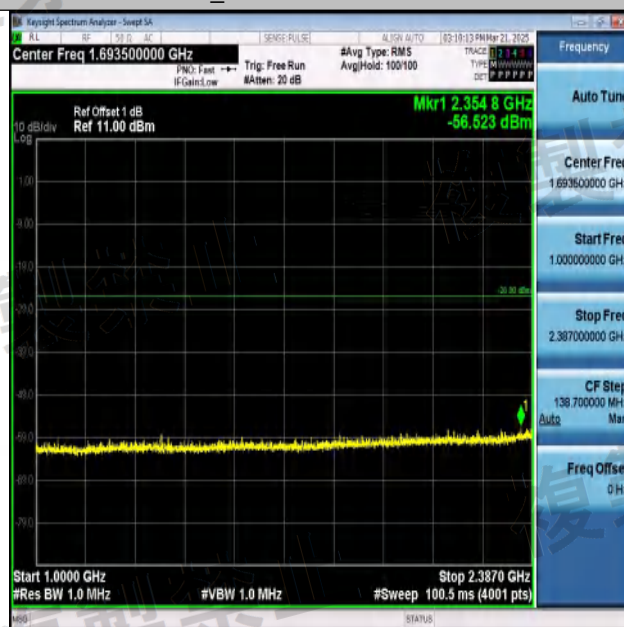


NTNV-BLE_1M-Ant1-2480-1000~2387-PASS



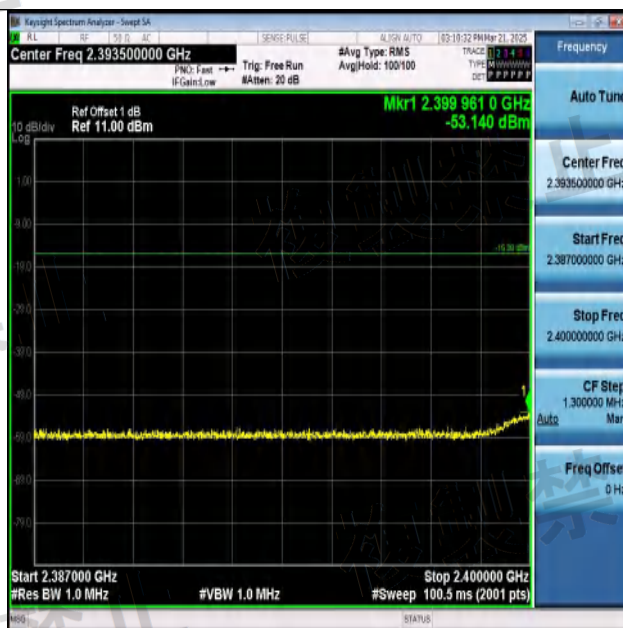


NTNV-BLE_1M-Ant1-2480-2387~2400-PASS

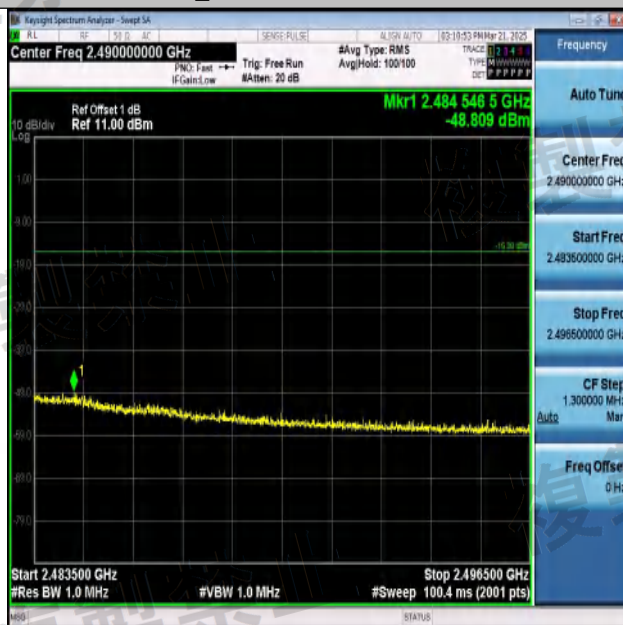


NTNV-BLE_1M-Ant1-2480-2483.5~2496.5-PASS



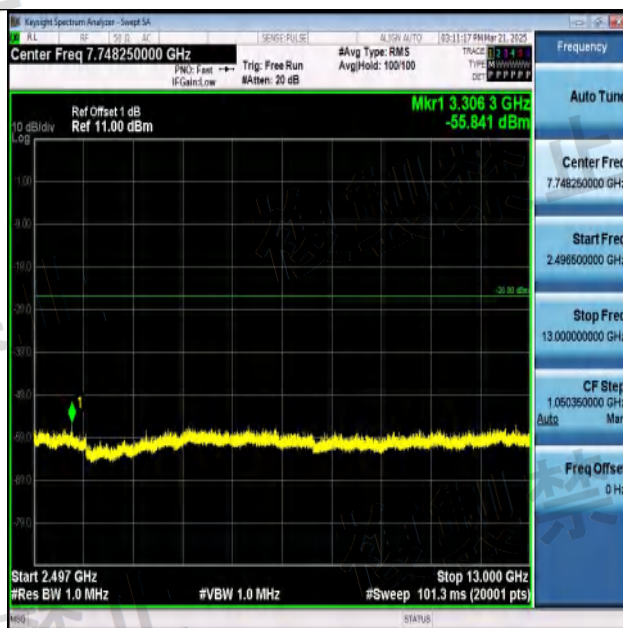



NTNV-BLE_1M-Ant1-2480-2496.5~13000-PASS

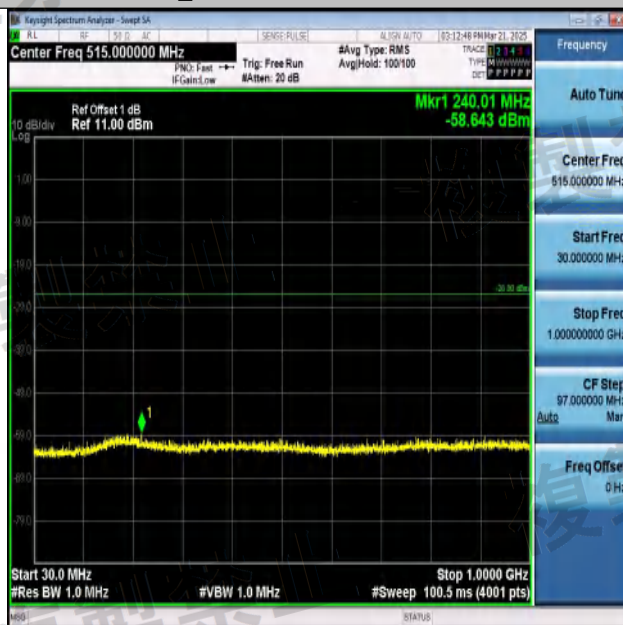


NTNV-BLE_2M-Ant1-2402-30~1000-PASS



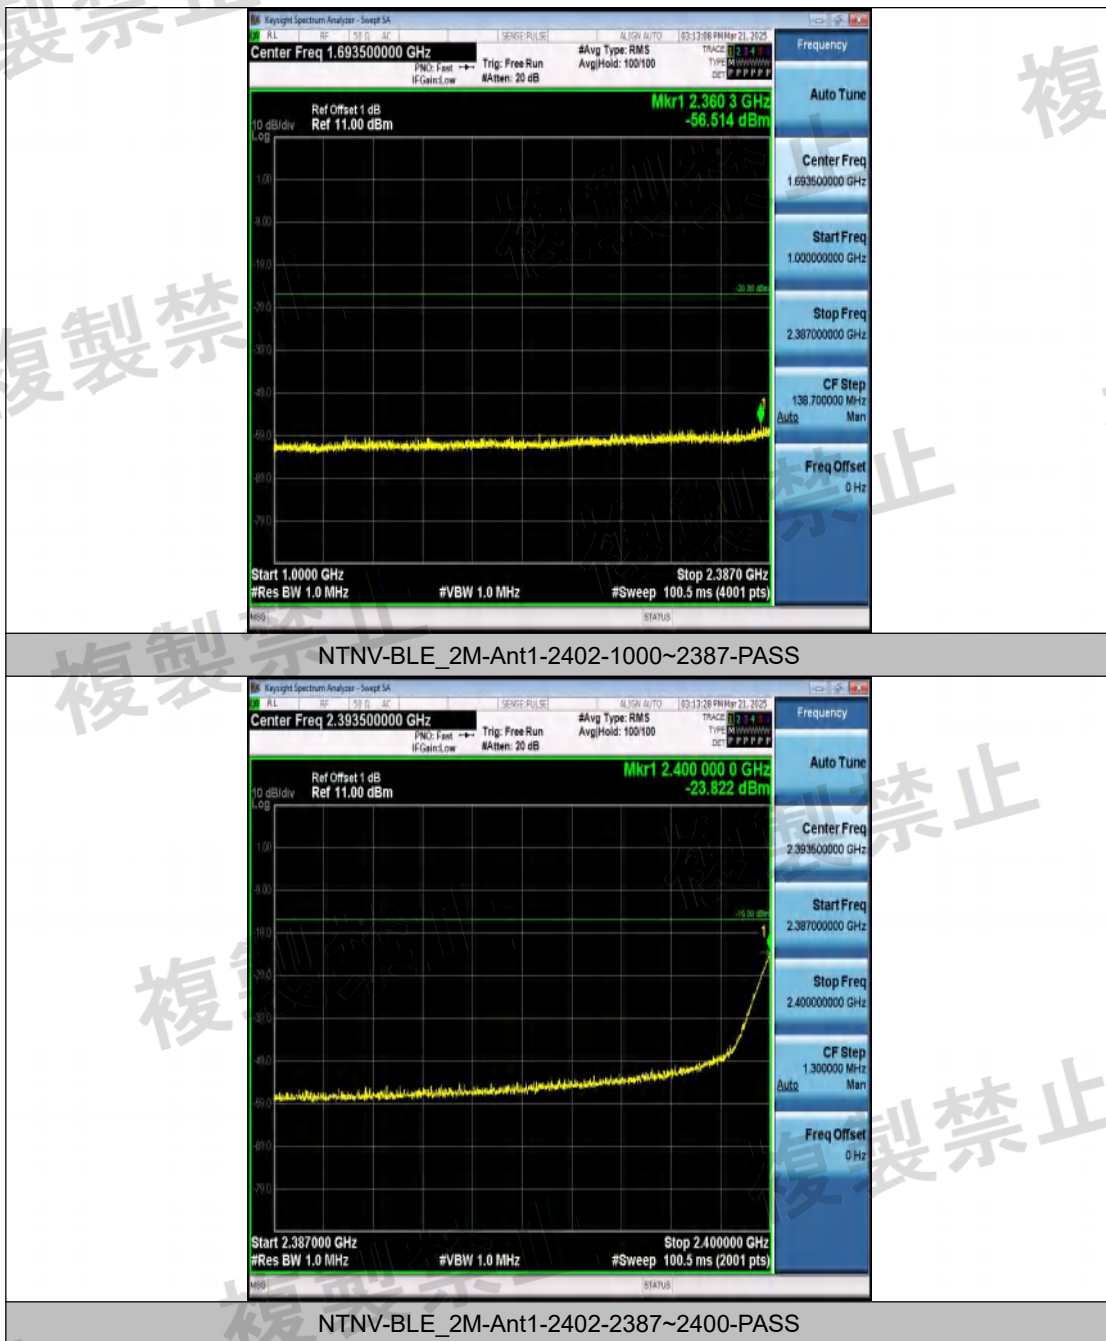

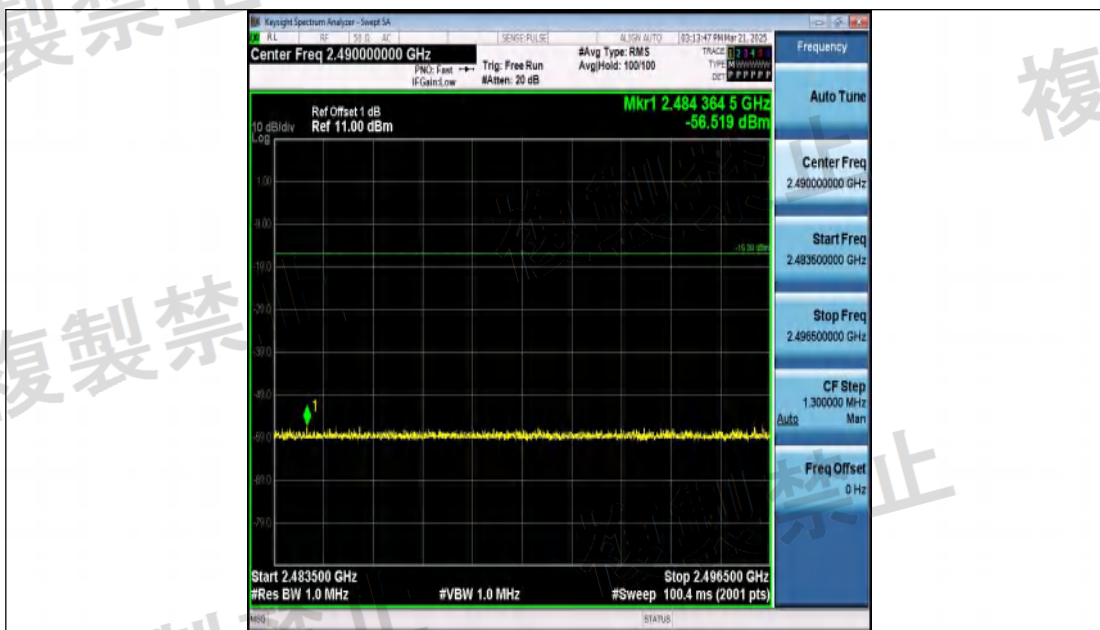


NTNV-BLE_2M-Ant1-2402-2483.5~2496.5-PASS

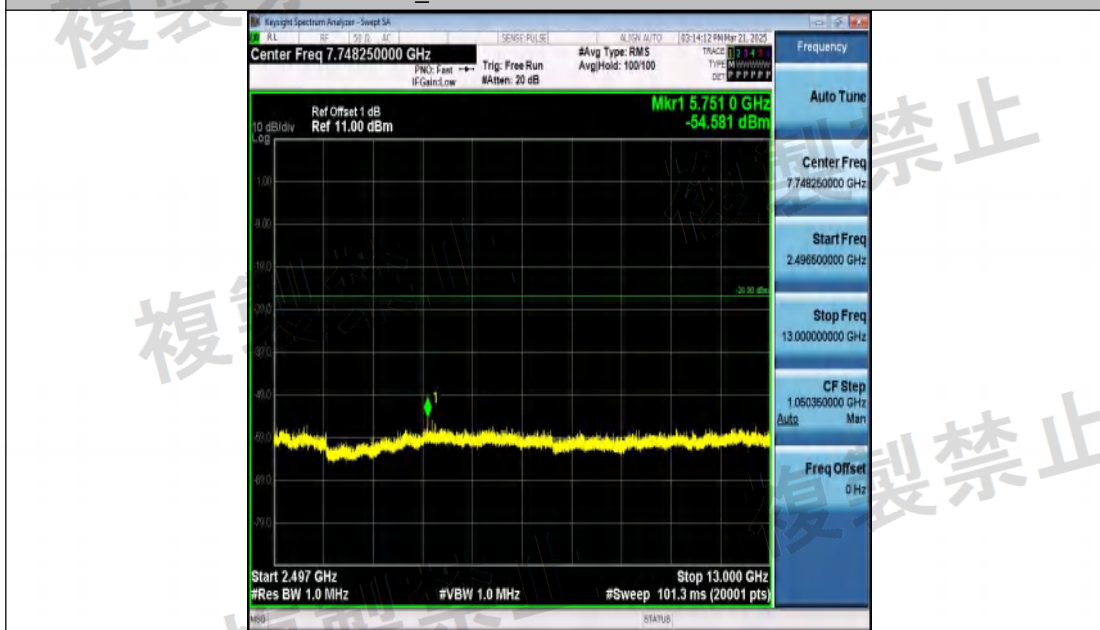


NTNV-BLE_2M-Ant1-2402-2496.5~13000-PASS



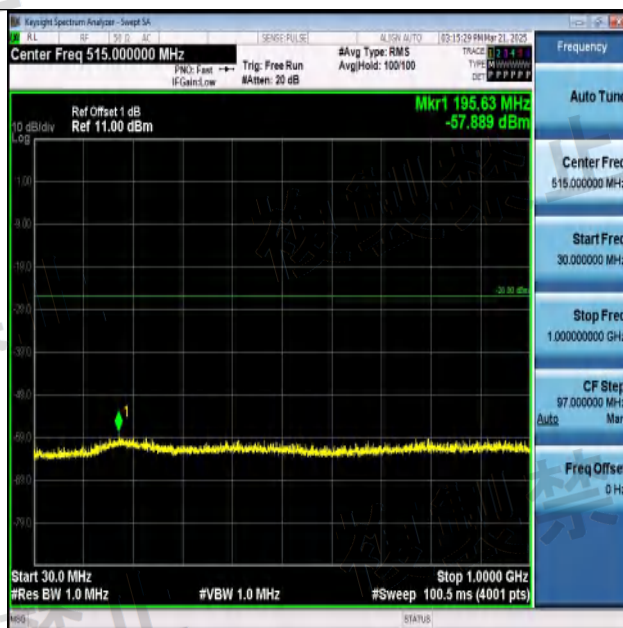


NTNV-BLE_2M-Ant1-2440-30~1000-PASS

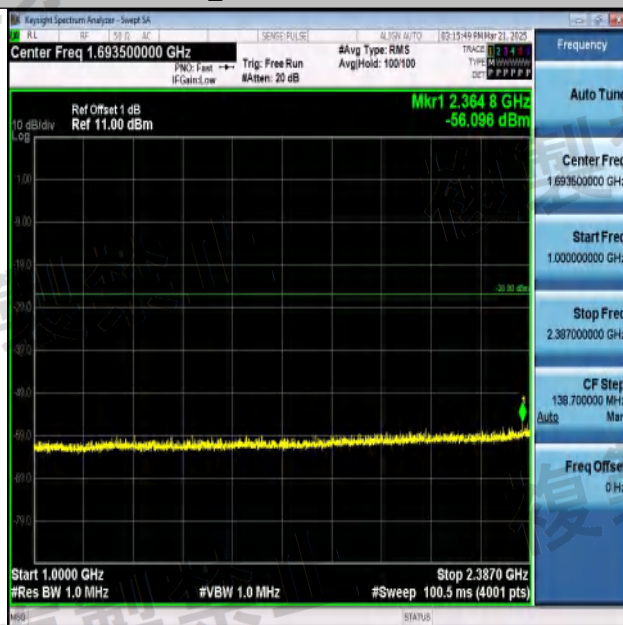


NTNV-BLE_2M-Ant1-2440-1000~2387-PASS



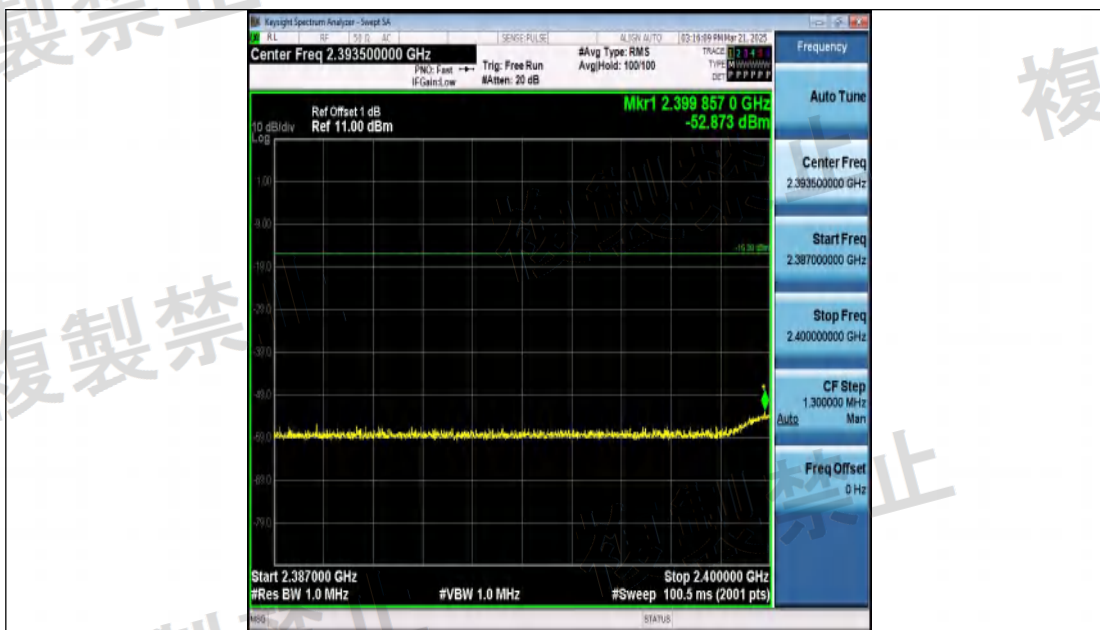


NTNV-BLE_2M-Ant1-2440-2387~2400-PASS

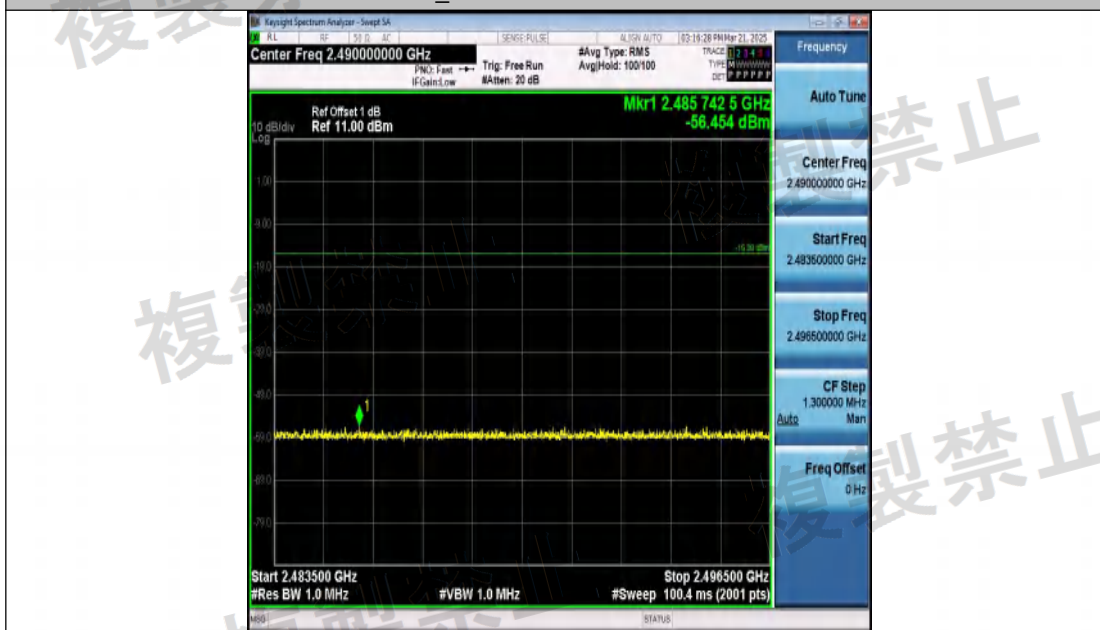


NTNV-BLE_2M-Ant1-2440-2483.5~2496.5-PASS



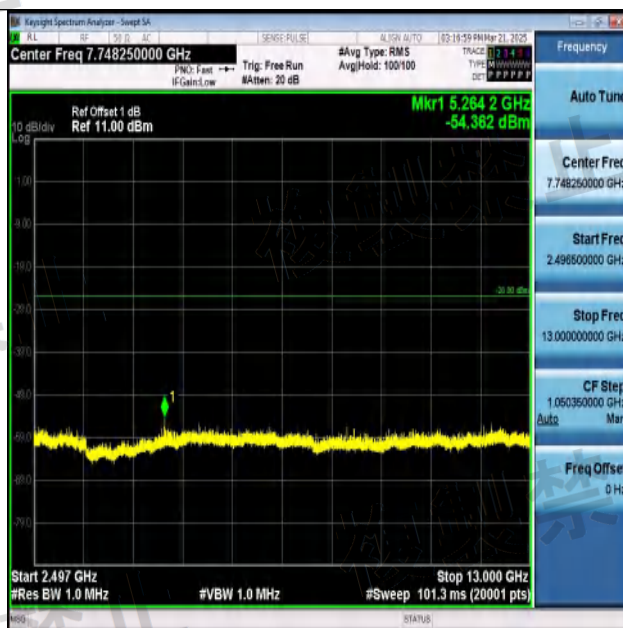



NTNV-BLE_2M-Ant1-2440-2496.5~13000-PASS

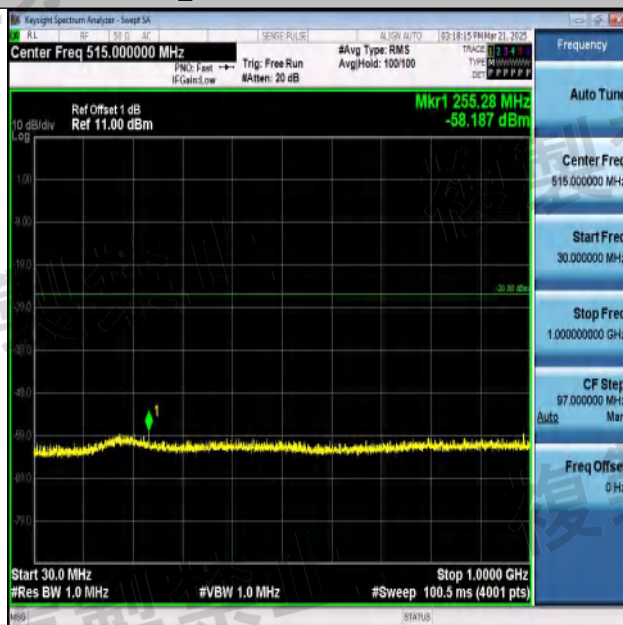


NTNV-BLE_2M-Ant1-2480-30~1000-PASS



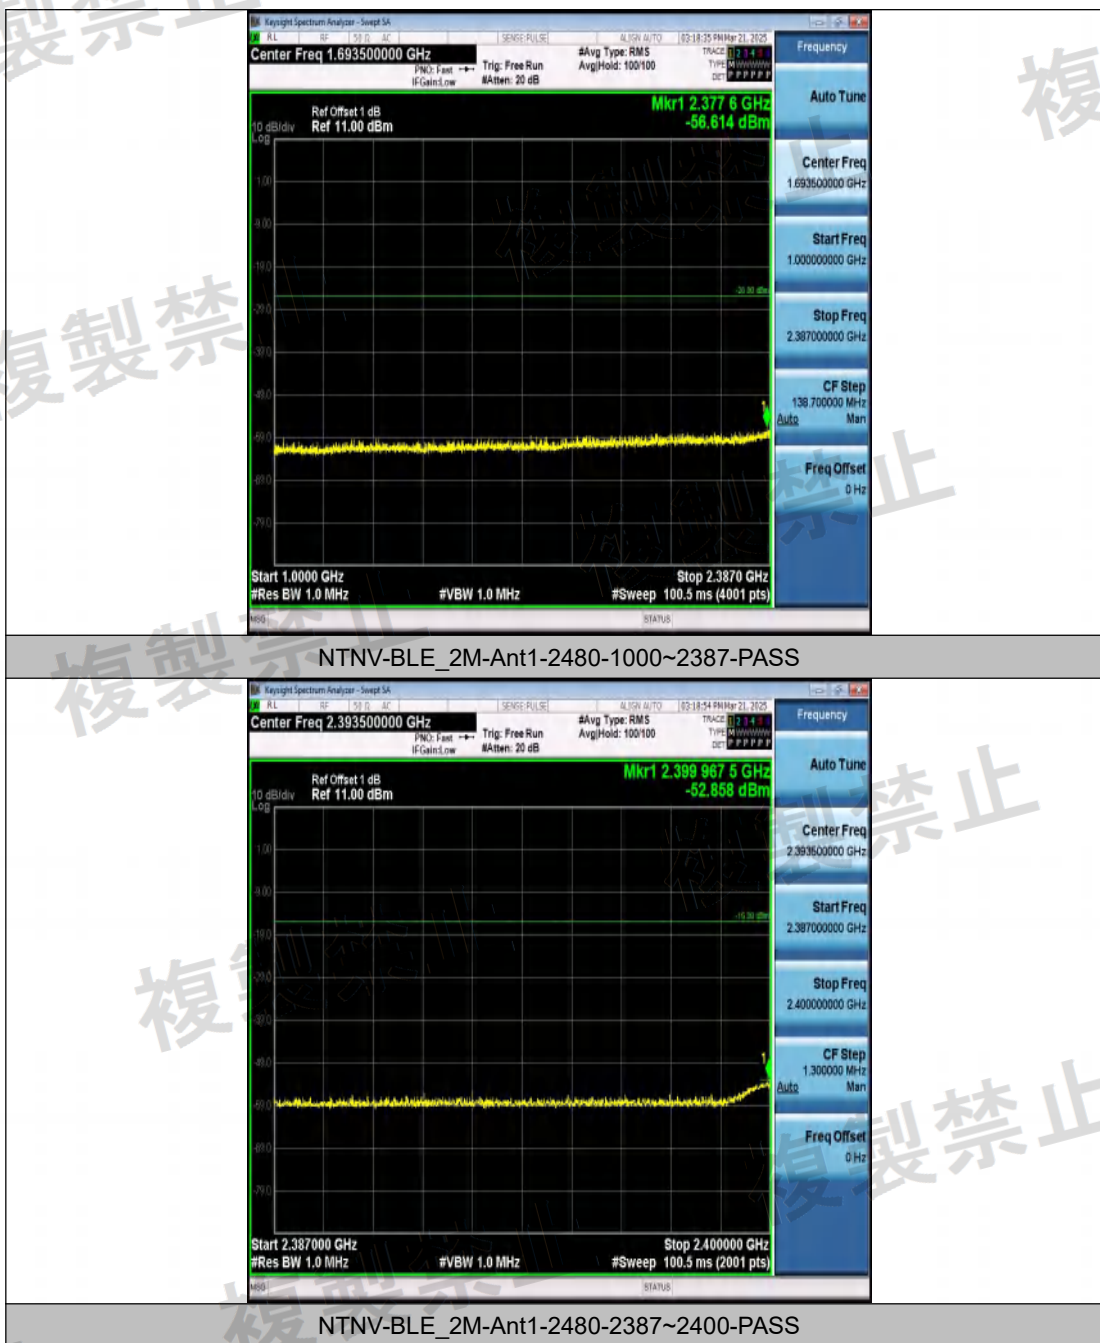

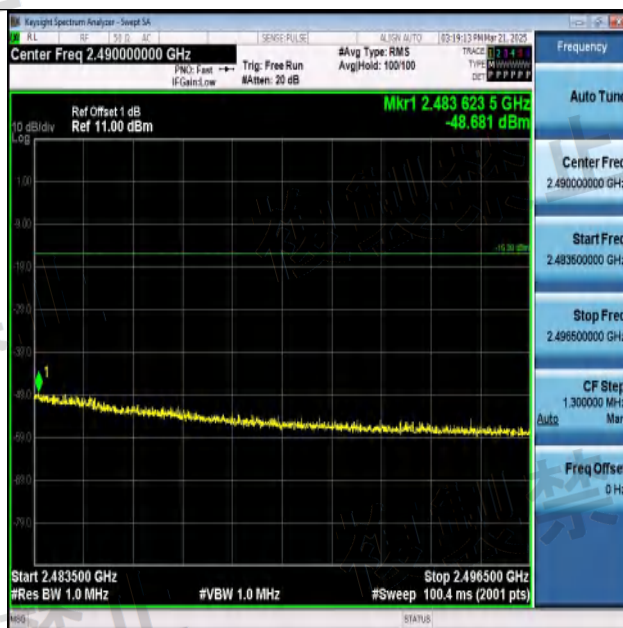

NTNV-BLE_2M-Ant1-2480-2483.5~2496.5-PASS

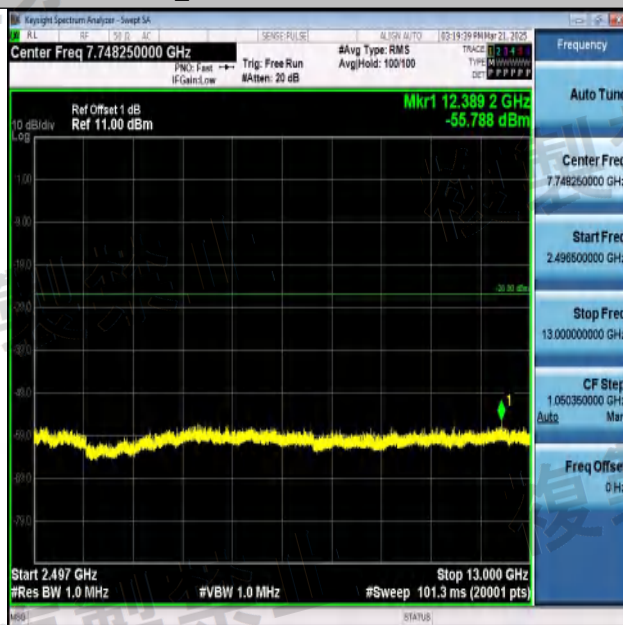

NTNV-BLE_2M-Ant1-2480-2496.5~13000-PASS




Appendix E: Spurious Emission of RX


Test Result

Test Condition	Test Mode	Antenna	Freq. [MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	159.98	-75.14	≤-54	0.03062	≤4	PASS
NTNV	BLE_1M	Ant1	2402	1000~12500	10884.25	-77.25	≤-47	0.01884	≤20	PASS
NTNV	BLE_1M	Ant1	2440	30~1000	206.06	-88.94	≤-54	0.00128	≤4	PASS
NTNV	BLE_1M	Ant1	2440	1000~12500	2648.53	-77.31	≤-47	0.01858	≤20	PASS
NTNV	BLE_1M	Ant1	2480	30~1000	190.05	-89.22	≤-54	0.00120	≤4	PASS
NTNV	BLE_1M	Ant1	2480	1000~12500	7286.48	-77.19	≤-47	0.01910	≤20	PASS
NTNV	BLE_2M	Ant1	2402	30~1000	203.15	-89.24	≤-54	0.00119	≤4	PASS
NTNV	BLE_2M	Ant1	2402	1000~12500	5328.60	-77.41	≤-47	0.01816	≤20	PASS
NTNV	BLE_2M	Ant1	2440	30~1000	259.41	-89.10	≤-54	0.00123	≤4	PASS
NTNV	BLE_2M	Ant1	2440	1000~12500	12349.35	-76.66	≤-47	0.02158	≤20	PASS
NTNV	BLE_2M	Ant1	2480	30~1000	202.66	-88.99	≤-54	0.00126	≤4	PASS
NTNV	BLE_2M	Ant1	2480	1000~12500	10568.00	-77.44	≤-47	0.01803	≤20	PASS




Test Graphs

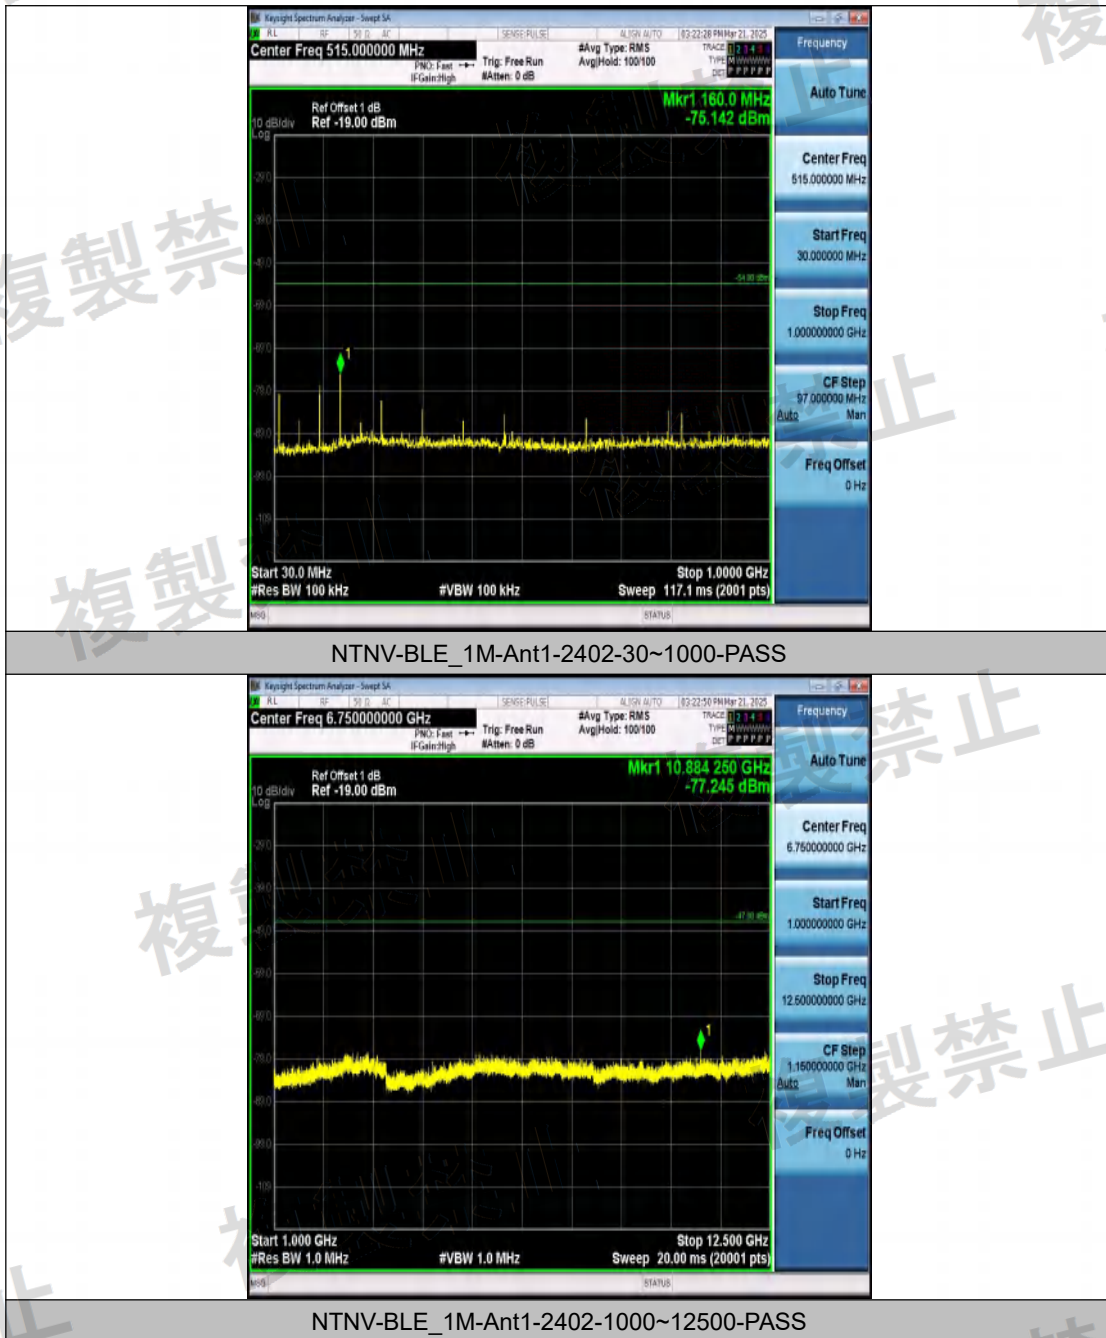

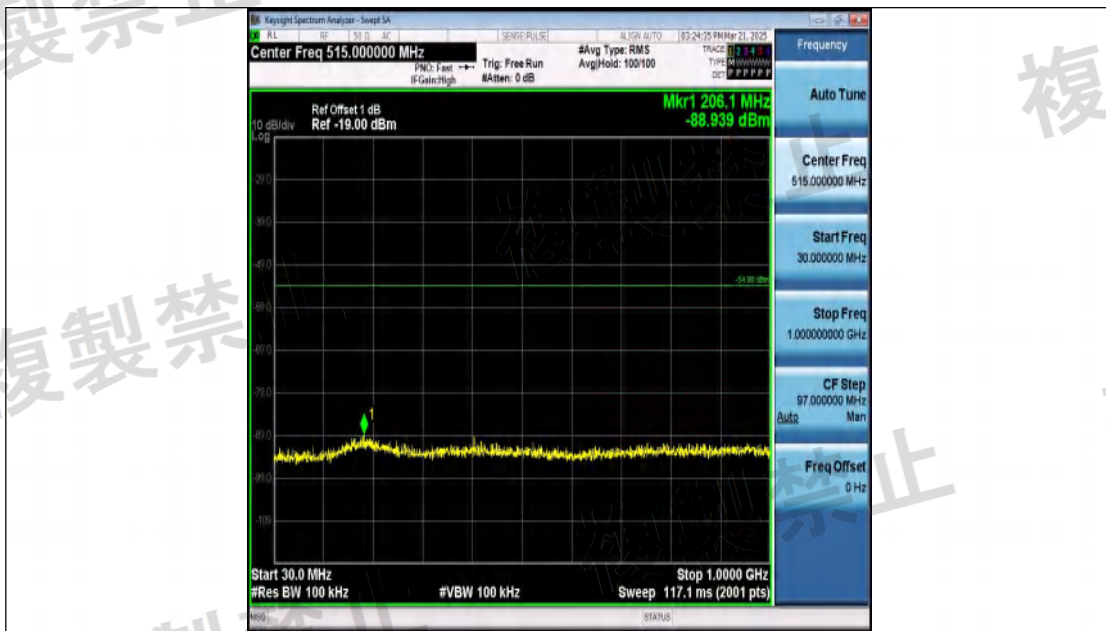



NTNV-BLE_1M-Ant1-2440-30~1000-PASS

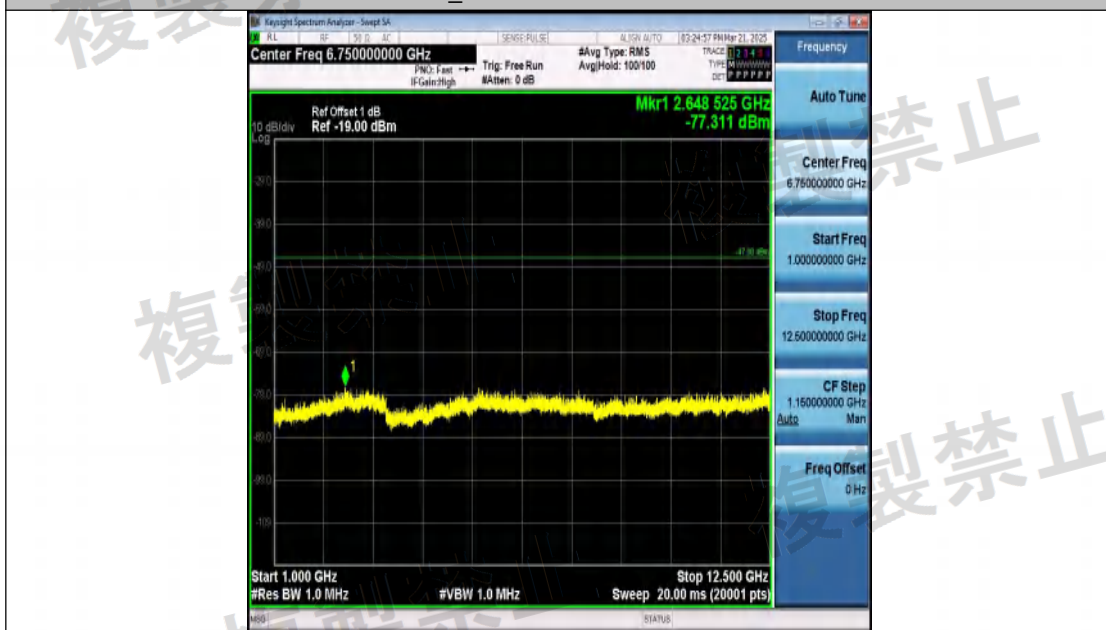


NTNV-BLE_1M-Ant1-2440-1000~12500-PASS



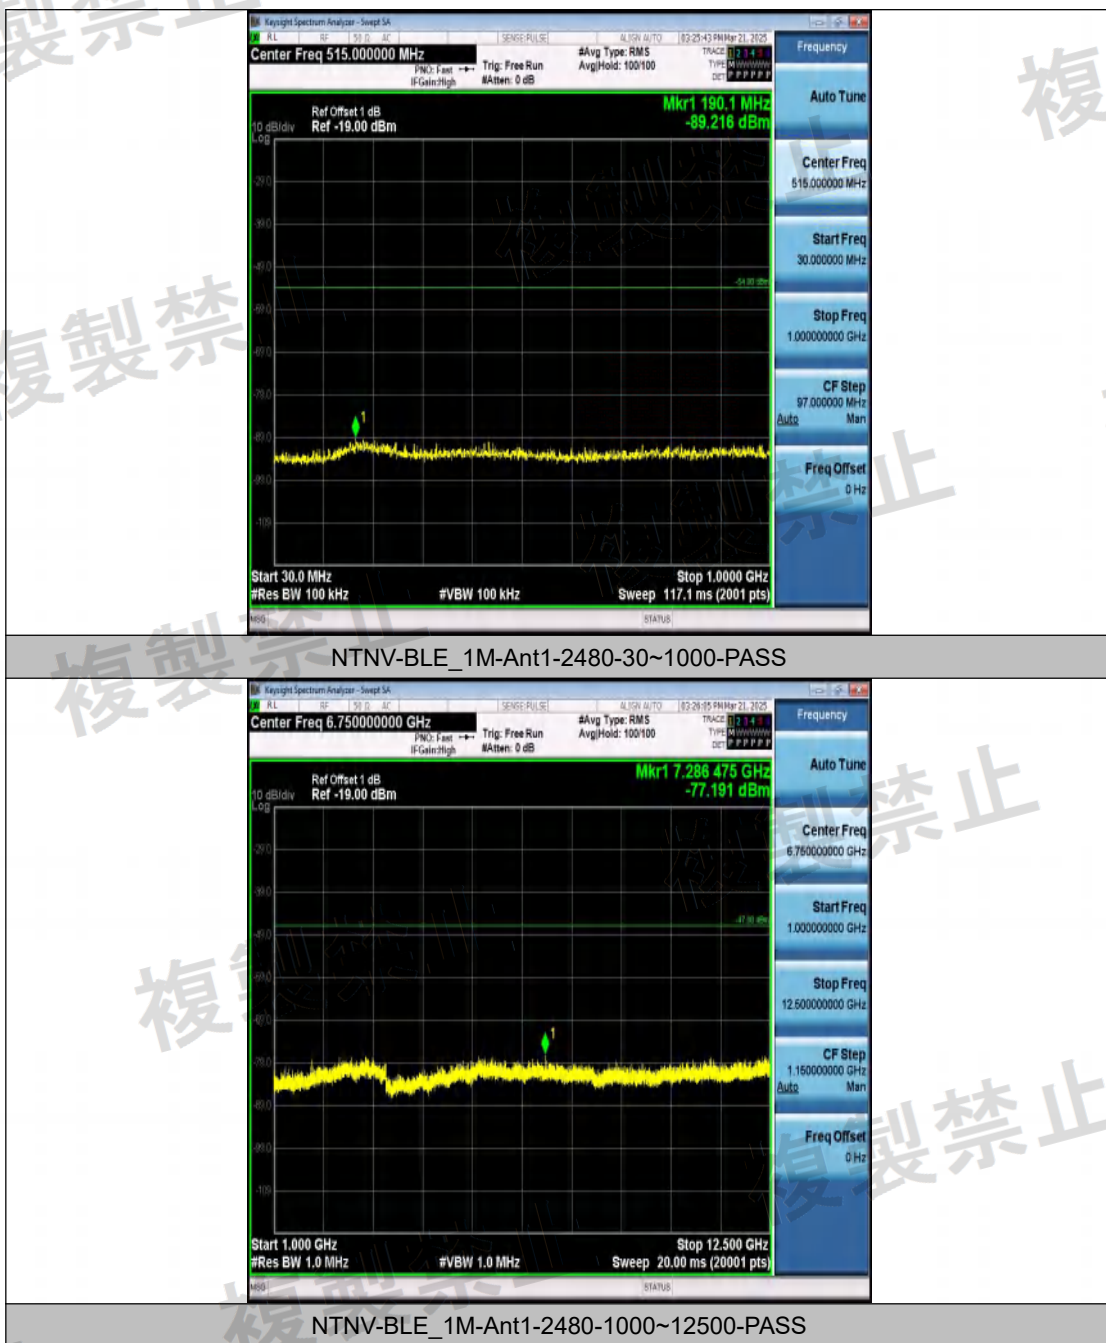

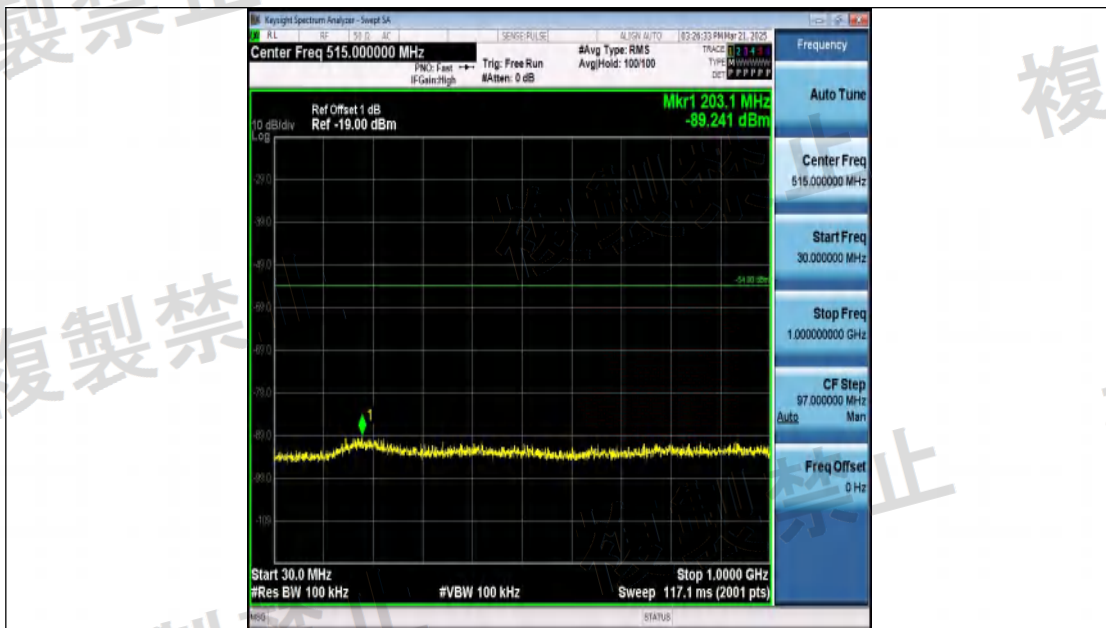


NTNV-BLE_2M-Ant1-2402-30~1000-PASS

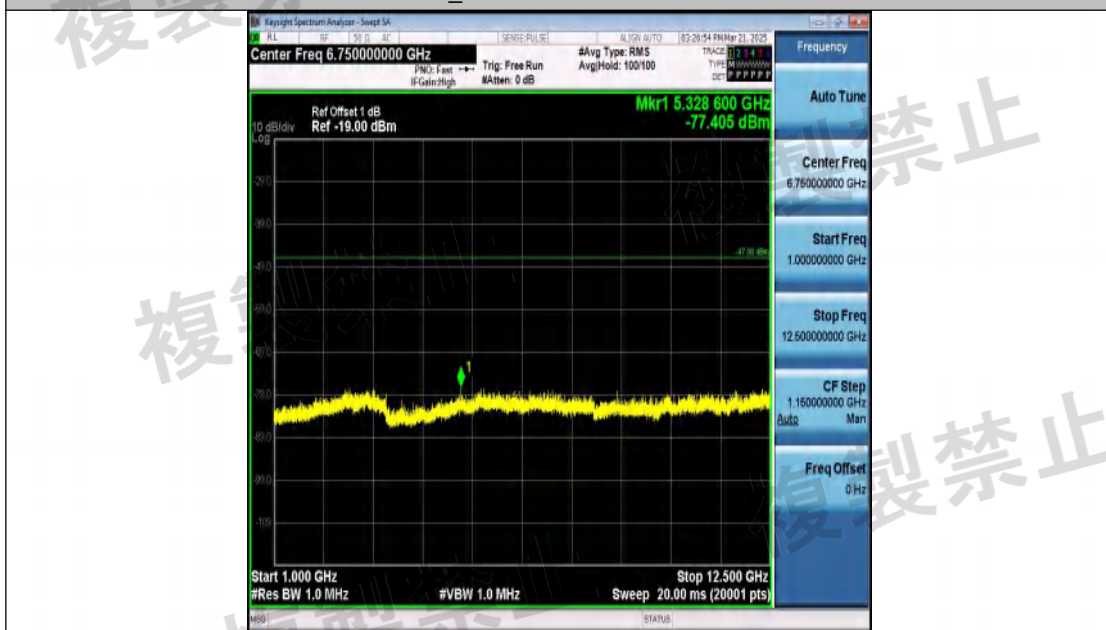


NTNV-BLE_2M-Ant1-2402-1000~12500-PASS



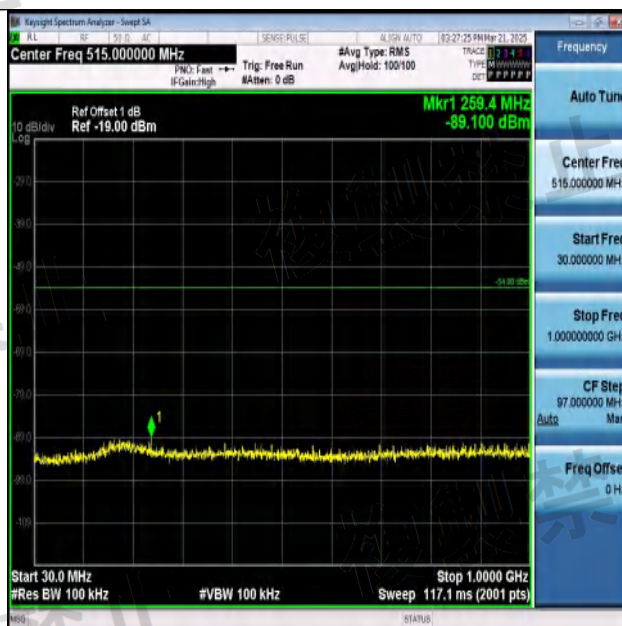


NTNV-BLE_2M-Ant1-2440-30~1000-PASS

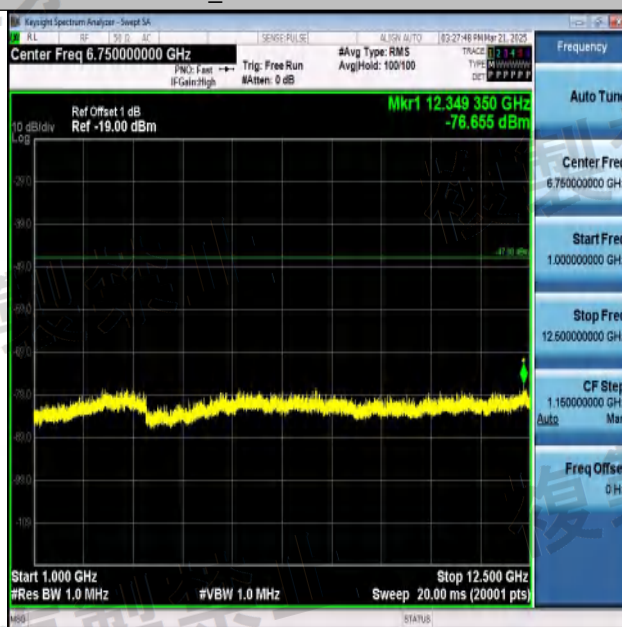

NTNV-BLE_2M-Ant1-2440-1000~12500-PASS



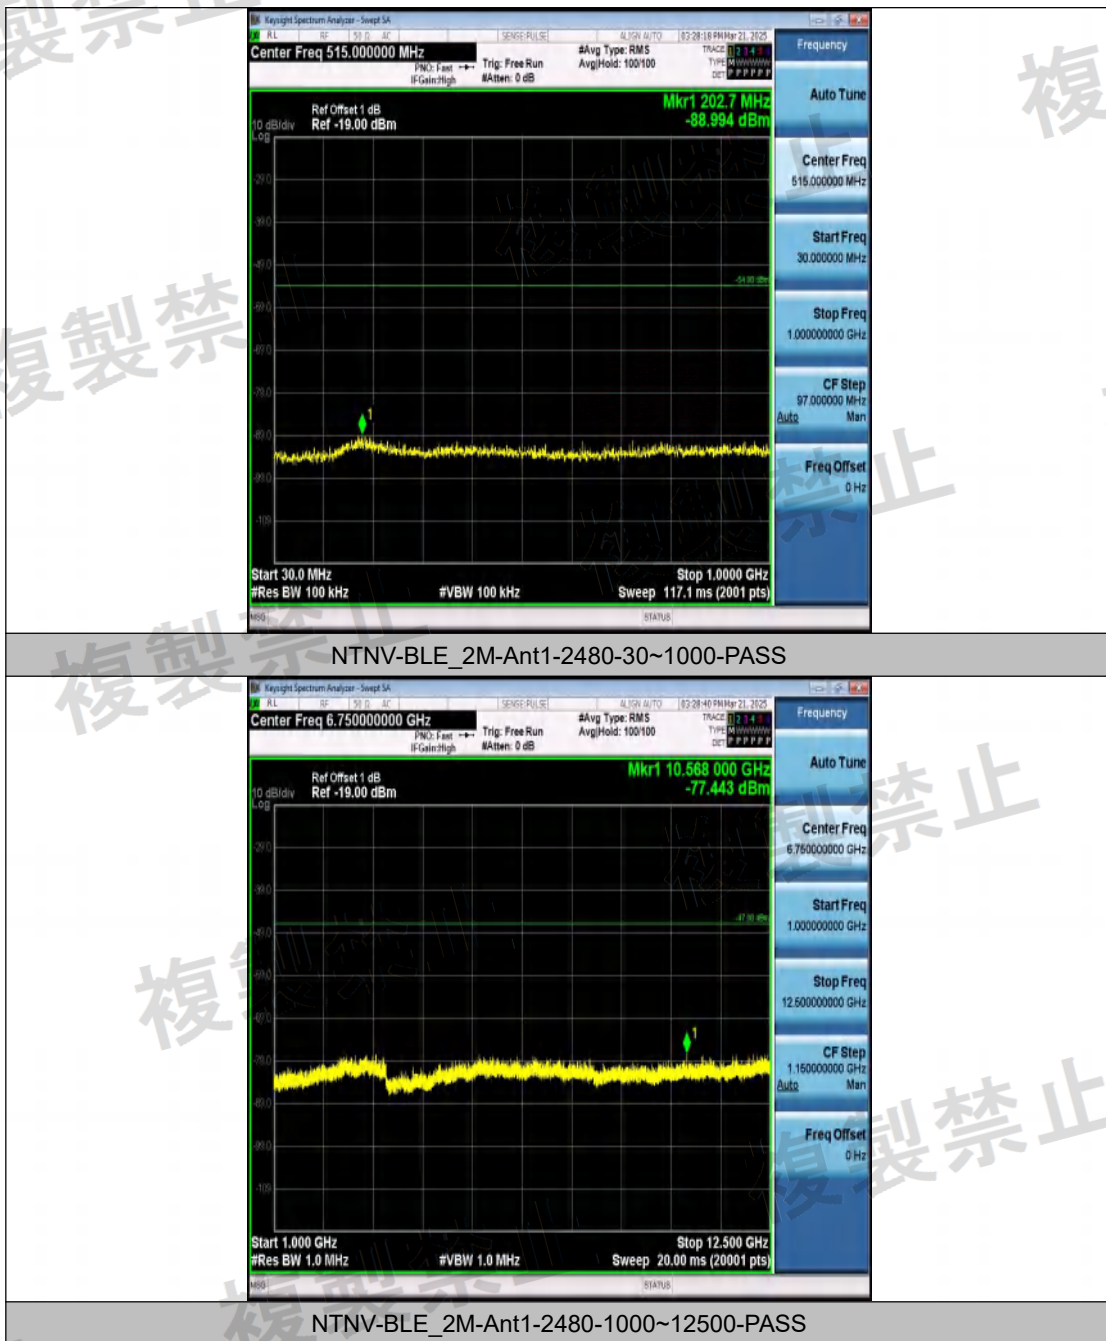

----- End of Report -----

