



晶復科技股份有限公司

A Test Lab Techno Corp.

行動通信電信終端設備技術規範(WCDMA)試驗報告

報告編號 2011DR30

版本(Rev.) 01

產品名稱 NR 手持式行動電話機

申請廠商 台灣三星電子股份有限公司

廠牌 SAMSUNG

型式 (號) SM-G9960

產品試驗依據之標準 行動通信電信終端設備技術規範 109 年 9 月 25 日

報告發行日期 109 年 11 月 26 日

填發本型式認可報告之試驗機構 (認可代號)

晶復科技股份有限公司
33465 桃園市八德區長安街 140-1 號
Tel : 03-2710188 / Fax : 03-2710190



財團法人全國認證基金會

認證編號： 1330

認證有效期間： 108.09.06 ~ 111.09.05

認可能量範圍： WCDMA 1920 MHz to 1980 MHz ; 2110 MHz to 2170 MHz
1710 MHz to 1785 MHz ; 1805 MHz to 1880 MHz
2500 MHz to 2570 MHz ; 2620 MHz to 2690 MHz
885 MHz to 915 MHz ; 930 MHz to 960 MHz

免責聲明

- 1.本測試報告所敘述之測試結果，僅對顧客所提供之測試樣品，在此測試報告所述及之測試條件下，所實施之量測有效。
- 2.本測試報告未經晶復科技股份有限公司書面同意，不得部分複製本報告內容。
- 3.本測試報告內容之相關資訊皆由顧客提供，針對顧客所提供資訊之正確性、適當性或完整性，若有疑義或錯誤，並因此影響本測試報告結果有效性時，本實驗室不負其相關責任。

報告修訂紀錄

版本 (Rev.)	發行日期	修訂內容	修訂者
00	109 年 11 月 16 日	初版發行	趙翊如
01	109 年 11 月 26 日	更新 4.2 章節(P.39、P.46)	趙翊如

行動通信電信終端設備技術規範(WCDMA)測試證明書

產品名稱 : NR手持式行動電話機

廠牌 : SAMSUNG

型號 : SM-G9960

申請廠商 : 台灣三星電子股份有限公司

申請者地址 : 臺北市內湖區瑞光路399號10樓之1

製造廠商(1) : Samsung Electronics Co., Ltd.

製造商地址(1) : 302,3Gongdan 3-Ro,Gumi-Si,Gyeongsangbuk-Do 730-722 Korea

製造廠商(2) : Tianjin Samsung Telecom.Technology Co.,Ltd.

製造商地址(2) : No.9 WeiWu Road, Micro-Electronics Industrial Park, XiQing District.,
Tianjin City 300385,P.R. China

製造廠商(3) : HUIZHOU SAMSUNG ELECTRONICS CO.,LTD

製造商地址(3) : 256, ZHONGKAI 6TH ROAD, CHENJIANG TOWN,HUIZHOU CITY,
GUANGDONG PROVINCE,CHINA

製造廠商(4) : Shenzhen Samsung Kejian Mobile Telecommunication Technology Co.,Ltd.

製造商地址(4) : Samsung Kejian Plant,No.2 Songping St., North Area of Hi-tech Park,Nanshan
District,Shenzhen City,Guangdong Province,People's Republic of China

製造廠商(5) : SAMSUNG ELECTRONICS VIETNAM CO., LTD

製造商地址(5) : Yen Phong 1 Industrial Zone,Yen Trung Commune,Yen Phong District,
Bac Ninh Province, Vietnam

製造廠商(6) : SAMSUNG ELECTRONICS VIETNAM THAI NGUYEN CO.,LTD

製造商地址(6) : Yen Binh IP,Dong Tien WARD Pho Yen,Thai Nguyen PROVINCE VIETNAM

待測物電壓 : 輸入: (PDO) 5.0 VDC, 3.0 A / 9.0 VDC, 2.77 A

(PPS) 5.9 VDC, 3.0 A - 11.0 VDC, 2.25 A

輸出: 5.0 VDC, 0.5 A(對其它裝置支持有線連接充電使用)

量測規範 : 行動通信電信終端設備技術規範 109 年 9 月 25 日

試驗實驗室 : 晶復科技股份有限公司(桃園市八德區長安街 140-1 號)

樣品接收日期 : 109 年 10 月 30 日

試驗日期 : 109 年 11 月 04 日

報告中所描述之測試結果與待測設備之架構組合,均根據實際量測情況作詳實的記錄。

由測試結果顯示,上述待測設備樣機確實已符合行動通信電信終端設備技術規範(GSM900)所規定的各項限制值。

特此證明!

審核者:

楊凱宇

(楊 凱 宇)

目 錄

行動通信電信終端設備技術規範(WCDMA)測試證明書	3
1. 一般敘述	5
1.1 待測設備一般敘述	5
1.2 其他相關聲明	7
2. 量測儀器及測試配置說明	8
2.1 量測設備	8
2.2 測試軟體版本	8
2.3 測試架構圖	9
2.4 量測不確定度	11
2.5 試驗環境	12
3. 測試項目與結果判定總表	13
4. 檢驗紀錄	14
4.1 測試項目總表	14
4.2 測試掃描圖	39

1. 一般敘述

1.1 待測設備一般敘述

本敘述僅針對產品簡單說明之，其他詳細之規格請參考使用說明書。

產 品 名 稱	NR 手持式行動電話機
廠 牌	SAMSUNG
型 號	SM-G9960
額 定 電 源	輸入: (PDO) 5.0 VDC, 3.0 A / 9.0 VDC, 2.77 A (PPS) 5.9 VDC, 3.0 A - 11.0 VDC, 2.25 A 輸出: 5.0 VDC, 0.5 A(對其它裝置支持有線連接充電使用)
I M E I N o .	IMEI 1 : 352733380012435, IMEI 2 : 358293220012438
調 變 方 式	BPSK
使 用 頻 帶	WCDMA Band 1 FDD: UL: 1920 - 1980 MHz / DL: 2110 - 2170 MHz WCDMA Band 8 FDD: UL: 885 - 915 MHz / DL: 930 - 960 MHz
天 線 廠 牌	GALTRONICS
天 線 型 號	SM-G996U
天 線 型 態	LDS Antenna
天 線 增 益 值	WCDMA Band 1: -7.46 dBi WCDMA Band 8: -7.58 dBi
最 大 輸 出 功 率	WCDMA Band 1: 23.23 dBm
	WCDMA Band 8: 24.21 dBm

註：1.此產品為雙 SIM 設計，經驗證後 SIM1 conducted power 最大；因此報告僅記錄 SIM1 結果數據。

2.此產品為雙 SIM 設計，驗證 SIM 1 PWS 測試卡+SIM 2 link 在 3G/4G 模擬網路及 SIM 2 PWS 測試卡+SIM 1 link 在 3G/4G 模擬網路，報告中僅呈現 SIM 1 PWS 測試卡+SIM 2 link 在 3G/4G 模擬網路 Band 1 之完整數據，其他頻段僅檢測 PWS 4370、4383、4371、4384、4380、4393、911 及 919 訊息碼。

輸出/輸入埠說明：

輸 出 / 入 埠		數量	介面內容說明
1	USB Type-C Port	1	連接至電源供應器/多媒體終端
2	Card Port	1	連接至 nano SIM Card

附屬裝置表:

裝置名稱	廠牌	型號	備註
內建固定式電池	SAMSUNG	EB-BG996ABY (本型式係指 PCB 版號 R07H)	3.88 VDC, 4660 mAh 製造商(1):Dongguan Amperex Technology Limited 製造商(2):Ningde Amperex Technology Limited *僅製造商不同
電源供應器(1)	SAMSUNG	EP-TA800	INPUT : 100-240 VAC, 50-60 Hz, 0.7 A OUTPUT : (PDO) 5.0 VDC, 3.0 A or 9.0 VDC, 2.77 A (PPS) 5.9 VDC, 3.0 A or 11.0 VDC, 2.25 A 製造商(1):DONGYANG INSTRUMENT QINGDAO Inc. 製造商(2):DONGYANG ELECTRIC AND POWER INDIA PRIVATE LIMITED 製造商(3):DONGYANG E&P VIETNAM CO., LTD. 製造商(4):DONG YANG E&P HCM VINA CO.,LTD 製造商(5):Huizhou Dongyang E&P Electronics Co., Ltd. 製造商(6):DONGYANG E&P Inc. *僅製造商不同 證書號碼: CI33806475I622 黑色/白色
電源供應器(2)	SAMSUNG	EP-TA800 (本型式係使用變壓器 型號為 EP-TA800)	INPUT : 100-240 VAC, 50-60 Hz, 0.7 A OUTPUT : (PDO) 5.0 VDC, 3.0 A or 9.0 VDC, 2.77 A (PPS) 5.9 VDC, 3.0 A or 11.0 VDC, 2.25 A 製造商(1):Dongguan Dongwon Electronics Co., Ltd. 製造商(2):HAEM VINA Co., Ltd. *僅製造商不同 證書號碼: CI33806475J192 黑色/白色
電源供應器(3)	SAMSUNG	EP-TA800 (本型式係指 PCB 版號型號: EP-TA800 REV1.0)	INPUT : 100-240 VAC, 50-60 Hz, 0.7 A OUTPUT : (PDO) 5.0 VDC, 3.0 A or 9.0 VDC, 2.77 A (PPS) 5.9 VDC, 3.0 A or 11.0 VDC, 2.25 A 製造商(1):RFTECH THAI NGUYEN CO., LTD 製造商(2):R. F. Tech Electronics (HuiZhou) Co., Ltd. 製造商(3):RFTech Bac Ninh Co., Ltd. 製造商(4):XIN XIN ELECTRONICS Co., Ltd. 製造商(5):RFTECH(TIANJIN) ELECTRONICS Co., Ltd. 製造商(6):RFTECH Co., Ltd. *僅製造商不同 證書號碼: CI33806475J283 黑色/白色
電源供應器(4)	SAMSUNG	EP-TA800 (本型式係使用變壓器 型號為 A800)	INPUT : 100-240 VAC, 50-60 Hz, 0.7 A OUTPUT : (PDO) 5.0 VDC, 3.0 A or 9.0 VDC, 2.77 A (PPS) 5.9 VDC, 3.0 A or 11.0 VDC, 2.25 A 製造商(1):Dongguan Yingju Power Co., Ltd. 製造商(2):Dongguan Solum Electronics Co., Ltd. 製造商(3):Dongguan City Yingju Electronics Co. Ltd. 製造商(4):SOLUM VINA COMPANY LIMITED *僅製造商不同 證書號碼: CI33806475I791 黑色/白色
USB Cable(1)	SAMSUNG	EP-DG980BBE	Type-C →Type-C Shielded, 1.0 m
USB Cable(2)	SAMSUNG	EP-DN980BBE	Type-C →Type-C Shielded, 1.0 m
USB Cable(3)	SAMSUNG	EP-DG980BWE	Type-C →Type-C Shielded, 1.0 m
USB Cable(4)	SAMSUNG	EP-DN980BWE	Type-C →Type-C Shielded, 1.0 m
耳機麥克風	SAMSUNG	EO-IG955	Non-Shielded, 1.2 m 黑色/白色

1.2 其他相關聲明

☒	申請新的型式檢驗認可的測試.
☐	已取得型式檢驗認可之商品,因設計變更而重新測試 (變更內容請參考產品概述). 登錄號碼: XXXXXXXX

2. 量測儀器及測試配置說明

2.1 量測設備

Test Period: Nov. 04, 2020

測試者：歐陽良相, 李杰翰


名 稱	廠 牌	型 號	序 號	本次校驗日期	校驗年限
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	03/31/2020	1 year
Divider	Warison	WDIV-2I0.5-26.5S20	WR222AM2B1	03/06/2020	1 year
Universal Radio Communication Tester	Agilent	E5515C	MY47511156	09/10/2020	1 year
Power Supply	KEITHLEY	2303	4045290	02/11/2020	1 year
Universal Radio Communication Tester	R&S	CMU200	112387	03/15/2020	1 year
SPECTRUM ANALYZER	Agilent	E4445A	MY45300744	12/05/2019	1 year
PWS-Signalling Tester	Anritsu	MD8475A	6201357755	03/29/2020	1 year
USB 聲音震動量測系統(擷取儀)	NI	USB-4432	1902A2F	12/16/2019	1 year
USB 聲音震動量測系統(振動器)	PCB	352C65	LW161409	12/19/2019	1 year

2.2 測試軟體版本


Measurement Software			
No.	Description	Software	Version
1	PWS	NCC PWS Test	1.1.1

2.3 測試架構圖


- 最大發射輸出功率
- 功率控制狀態下之最小平均輸出功率
- 佔用頻道頻寬
- ACLR
- 發射頻譜波罩

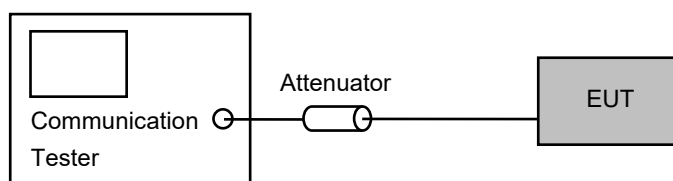


- 混附波輻射
- 工作頻帶
- 收發頻率間隔
- 標稱頻道間隔

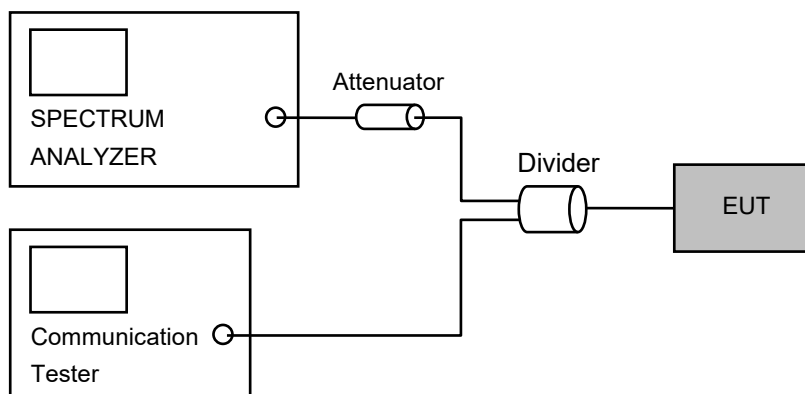

■ 頻率穩定性

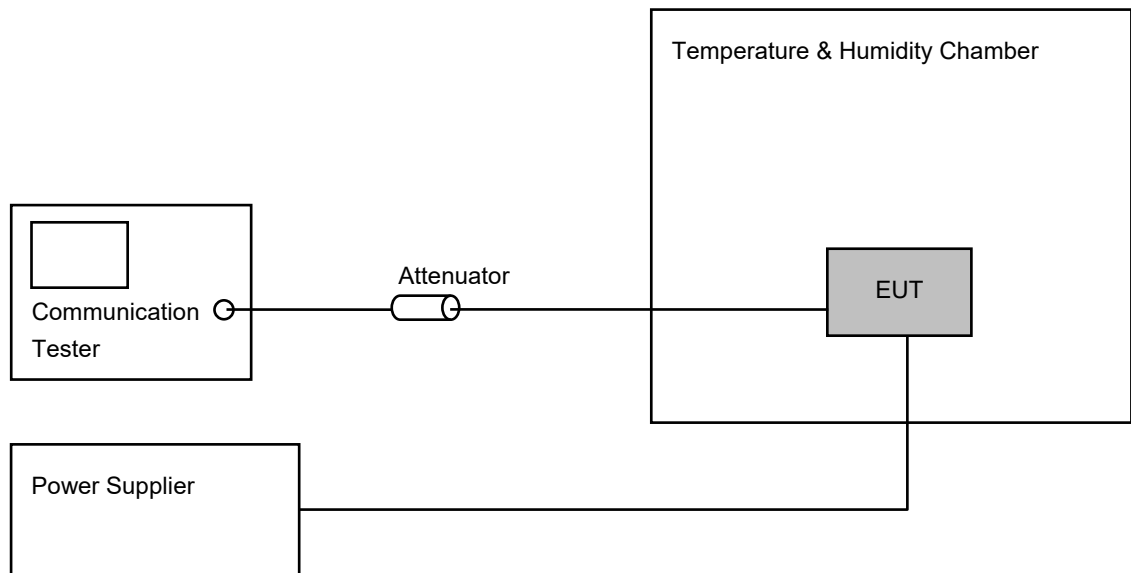

■ 災防告警細胞廣播訊息接收功能

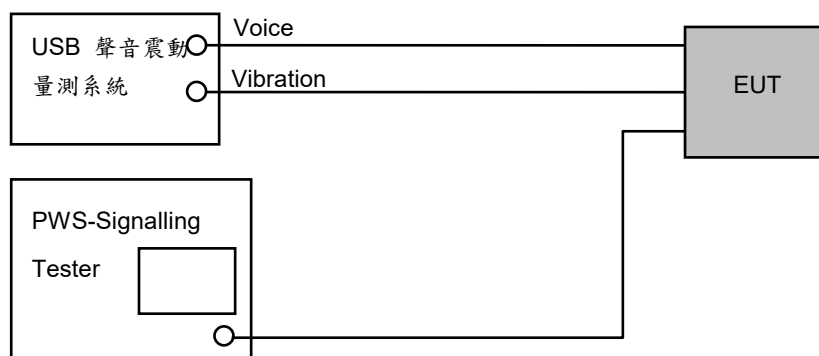

2.4 量測不確定度

下列量測不確定水準是參照量測儀器 CISPR 16-4-2 所規定之不確定度。

Test Item	Uncertainty (dB)
最大輸出功率 (傳導)	1.1 dB
發射頻譜波罩 (傳導)	1.1 dB
混附波輻射(傳導)	2.5 dB
相鄰頻道洩漏功率比 (傳導)	1.1 dB
操作頻率、頻率穩定度 (Frequency Error and Frequency Stability)	$1.2 \times 10^{-7} * F_c$ (Hz)
工作頻帶、放發頻率間隔、標稱頻道間隔 (頻率)	$1.2 \times 10^{-7} * F_c$ (Hz)
電波功率密度(傳導)	1.1 dB
災防告警細胞廣播訊息接收功能 (聲音)	0.2 dB
災防告警細胞廣播訊息接收功能 (振動)	3.6 %
佔用頻道頻寬 (傳導)	$1.2 \times 10^{-7} * F_c$ (Hz)

2.5 試驗環境

產品測試時之實驗室環境條件如下:

項 目	實 際	常態環境要求
溫度 Temperature (°C)	18 - 28	15 - 35
濕度 Humidity (%RH)	45 - 75	25 - 75

電池種類及電壓的計算
□AC mains V_{Nom}=標稱電壓 V_{Low}=標稱電壓* 0.9 V_{High}=標稱電壓*1.1 □Regulated lead acid battery V_{Nom}=標稱電壓 * 1.1 V_{Low}=標稱電壓* 0.9 V_{High}=標稱電壓*1.3 Non regulated batteries : □Leclanche V_{Nom}=標稱電壓 V_{Low}=標稱電壓* 0.85 V_{High}=標稱電壓 ■Lithium V_{Nom}=標稱電壓 * 1.1 V_{Low}=標稱電壓* 0.95 V_{High}=標稱電壓*1.1 □Mercury/nickel & cadmium V_{Nom}=標稱電壓 V_{Low}=標稱電壓* 0.9 V_{High}=標稱電壓*1.1

測試條件			
工作電壓 DC(範圍) :	標稱電壓	3.88	V
	低極端電壓	3.68	V
	關機電壓	3.64	V
	常態電壓	4.27	V
	高極端電壓	4.27	V
測試溫度(範圍) :	低極端溫度	-10	(°C)
	常態溫度	20	(°C)
	高極端溫度	55	(°C)

3. 測試項目與結果判定總表

項次	檢驗項目	適用標準	試驗結果	結果判定
1	工作頻帶	行動通信電信終端設備技術規範, 6.4.1節	請參閱第4節	符合
2	收發頻率間隔	行動通信電信終端設備技術規範, 6.4.1節	請參閱第4節	符合
3	標稱頻道間隔	行動通信電信終端設備技術規範, 6.4.1節	請參閱第4節	符合
4	最大發射出功率	行動通信電信終端設備技術規範, 6.4.2節	請參閱第4節	符合
5	頻率穩定度	行動通信電信終端設備技術規範, 6.4.3節	請參閱第4節	符合
6	功率控制狀態下之 最小平均功率輸出	行動通信電信終端設備技術規範, 6.4.4節	請參閱第4節	符合
7	佔用頻道頻寬	行動通信電信終端設備技術規範, 6.4.5節	請參閱第4節	符合
8	發射頻譜波罩	行動通信電信終端設備技術規範, 6.4.6節	請參閱第4節	符合
9	ACLR	行動通信電信終端設備技術規範, 6.4.7節	請參閱第4節	符合
10	混附波輻射	行動通信電信終端設備技術規範, 6.4.8節	請參閱第4節	符合
11	災防告警細胞廣播 訊息接收功能	行動通信電信終端設備技術規範, 6.10節	請參閱第4節	符合 (Note)

Note:僅完整評估 Band 1，其餘頻段僅檢測 PWS 4370、4383、4371、4384、4380、4393、911 及 919 訊息碼，結果判定符合。

Decision Rule

■ Uncertainty is not included.

□ Uncertainty is included.

4. 檢驗紀錄

4.1 測試項目總表

Band 1					
項次	檢驗項目及標準	檢驗結果			判定
1	工作頻帶 Tx : 1920 - 1980 MHz Rx : 2110 - 2170 MHz	Tx : 1920 - 1980 MHz Rx : 2110 - 2170 MHz			符 合
2	收發頻率間隔 190 MHz	低頻道	頻道 9612	190 MHz	符 合
		中頻道	頻道 9750	190 MHz	
		高頻道	頻道 9888	190 MHz	
3	標稱頻道間隔 5 MHz	低頻道	頻道 9612	5 MHz	符 合
		中頻道	頻道 9750	5 MHz	
		高頻道	頻道 9888	5 MHz	
4	最大發射輸出功率 24 dBm +1.7/-3.7 dB (Class 3)	SIM1			符 合
		低頻道	頻道 9612	23.05 dBm	
		中頻道	頻道 9750	23.21 dBm	
		高頻道	頻道 9888	23.23 dBm	
		SIM2			
		低頻道	頻道 9612	22.82 dBm	
		中頻道	頻道 9750	22.94 dBm	
		高頻道	頻道 9888	22.98 dBm	

項次	檢驗項目及標準	判定
5	頻率穩定度 終端設備於常態環境常態電壓、低極端溫度低極端電壓、低極端溫度高極端電壓、高極端溫度低極端電壓、高極端溫度高極端電壓等五種測試環境下，分別進行頻率量測，經 0/2/5/10 分鐘量測結果，頻率應維持在頻道之主波頻率 0.1ppm 以內。	符合

工作頻段		Band 1				
Channel		9612				
Frequency(MHz)		1922.4				
測試溫度/電壓	檢驗結果					
	0 分鐘	2 分鐘	5 分鐘	10 分鐘	單位	
TL/VL	0.000	0.004	-0.004	0.004	ppm	
TL/VH	0.003	0.000	0.000	0.002	ppm	
TN/VN	-0.003	0.000	-0.001	0.006	ppm	
TH/VL	0.001	0.004	0.004	0.005	ppm	
TH/VH	-0.004	0.005	0.002	-0.005	ppm	
Channel		9750				
Frequency(MHz)		1950				
測試溫度/電壓	檢驗結果					
	0 分鐘	2 分鐘	5 分鐘	10 分鐘	單位	
TL/VL	-0.001	-0.005	0.003	-0.003	ppm	
TL/VH	0.000	-0.002	0.000	0.005	ppm	
TN/VN	0.000	0.007	-0.002	-0.002	ppm	
TH/VL	0.003	0.005	0.000	-0.004	ppm	
TH/VH	-0.004	-0.002	-0.003	0.000	ppm	
Channel		9888				
Frequency(MHz)		1977.6				
測試溫度/電壓	檢驗結果					
	0 分鐘	2 分鐘	5 分鐘	10 分鐘	單位	
TL/VL	0.005	0.005	-0.001	0.002	ppm	
TL/VH	0.000	0.005	-0.003	0.002	ppm	
TN/VN	-0.002	-0.002	0.005	-0.003	ppm	
TH/VL	-0.002	0.001	-0.001	-0.003	ppm	
TH/VH	0.004	-0.002	0.000	-0.002	ppm	

項次	檢驗項目及標準	檢驗結果					判定
6	功率控制狀態下之最小平均功率輸出 ≤ -50 dBm(in one time slot)	低頻道	頻道 9612	-57.58	dBm	符 合	
		中頻道	頻道 9750	-57.75	dBm		
		高頻道	頻道 9888	-57.36	dBm		
7	佔用頻道寬 ≤ 5 MHz	低頻道	頻道 9612	4.112	MHz	符 合	
		中頻道	頻道 9750	4.118	MHz		
		高頻道	頻道 9888	4.153	MHz		
8	發射頻譜波罩 符合[PLMN08]表一之三	低頻道	頻道 9612	請參考 4.2. 測試掃描圖 “發射頻譜波罩”		符 合	
		中頻道	頻道 9750				
		高頻道	頻道 9888				
9	鄰頻道洩漏功率比 偏移± 5 MHz 洩漏功率限制 ≤ 33 dB 偏移± 10 MHz 洩漏功率限制 ≤ 43 dB	低頻道	頻道 9612	± 5 MHz	-44.4	dB	符 合
				± 10 MHz	-54.8	dB	
		中頻道	頻道 9750	± 5 MHz	-45.1	dB	
				± 10 MHz	-54.0	dB	
		高頻道	頻道 9888	± 5 MHz	-42.9	dB	
				± 10 MHz	-52.9	dB	

項次	檢驗項目及標準	工作頻段	檢測頻道	檢驗結果	判定
11	災防告警細胞廣播訊息接收功能 設備應具備接收訊息碼及顯示其訊息內容之功能	WCDMA B1	911	具備接收訊息及顯示其訊息內容	符合
			919	具備接收訊息及顯示其訊息內容	
			4370	具備接收訊息及顯示其訊息內容	
			4371	具備接收訊息及顯示其訊息內容	
			4372	具備接收訊息及顯示其訊息內容	
			4373	具備接收訊息及顯示其訊息內容	
			4374	具備接收訊息及顯示其訊息內容	
			4375	具備接收訊息及顯示其訊息內容	
			4376	具備接收訊息及顯示其訊息內容	
			4377	具備接收訊息及顯示其訊息內容	
			4378	具備接收訊息及顯示其訊息內容	
			4379	具備接收訊息及顯示其訊息內容	
			4380	具備接收訊息及顯示其訊息內容	
			4383	具備接收訊息及顯示其訊息內容	
			4384	具備接收訊息及顯示其訊息內容	
			4385	具備接收訊息及顯示其訊息內容	
			4386	具備接收訊息及顯示其訊息內容	
			4387	具備接收訊息及顯示其訊息內容	
			4388	具備接收訊息及顯示其訊息內容	
			4389	具備接收訊息及顯示其訊息內容	
			4390	具備接收訊息及顯示其訊息內容	
			4391	具備接收訊息及顯示其訊息內容	
			4392	具備接收訊息及顯示其訊息內容	
			4393	具備接收訊息及顯示其訊息內容	

項次	檢驗項目及標準	工作頻段	檢測頻道	檢驗結果	判定
11	災防告警細胞廣播訊息 接收功能 災防告警細胞廣播訊息 之接收處理必須優先於 設備其他功能	WCDMA B1	911	優先於設備其他功能	符合
			919	優先於設備其他功能	
			4370	優先於設備其他功能	
			4371	優先於設備其他功能	
			4372	優先於設備其他功能	
			4373	優先於設備其他功能	
			4374	優先於設備其他功能	
			4375	優先於設備其他功能	
			4376	優先於設備其他功能	
			4377	優先於設備其他功能	
			4378	優先於設備其他功能	
			4379	優先於設備其他功能	
			4380	優先於設備其他功能	
			4383	優先於設備其他功能	
			4384	優先於設備其他功能	
			4385	優先於設備其他功能	
			4386	優先於設備其他功能	
			4387	優先於設備其他功能	
			4388	優先於設備其他功能	
			4389	優先於設備其他功能	
			4390	優先於設備其他功能	
			4391	優先於設備其他功能	
			4392	優先於設備其他功能	
			4393	優先於設備其他功能	

項次	檢驗項目及標準	工作頻段	檢測頻道	檢驗結果	判定
11	災防告警細胞廣播訊息接收功能 設備接收基地臺發送之災防告警細胞廣播訊息屬同一訊息者，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動。	WCDMA B1	911	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	符合
			919	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4370	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4371	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4372	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4373	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4374	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4375	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4376	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4377	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4378	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4379	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4380	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4383	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4384	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4385	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4386	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4387	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4388	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4389	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4390	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4391	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4392	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	
			4393	接收同一災防告警細胞廣播訊息，設備應不再重複顯示其訊息內容，亦不再產生聲響及振動	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有聲響信號	WCDMA B1	4370	Audio Tone Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4371	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
			4372	Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
			4373	Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有聲響信號	WCDMA B1	4374	Audio Tone Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4375	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4376	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4377	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有聲響信號	WCDMA B1	4378	Audio Tone Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4379	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4380	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4383	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有聲響信號	WCDMA B1	4384	Audio Tone Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4385	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4386	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
			4387	Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有聲響信號	WCDMA B1	4388	Audio Tone Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4389	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4390	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4391	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有聲響信號	WCDMA B1	4392	Audio Tone Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
			4393	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有聲響信號	WCDMA B1	4370	Audio Frequency Data			符合
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4371	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4372	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4373	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4374	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4375	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4376	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4377	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4378	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4379	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4380	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有聲響信號	WCDMA B1	4383	Audio Frequency Data			符合
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4384	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4385	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4386	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4387	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4388	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4389	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4390	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4391	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4392	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	
			4393	Low Frequency	853 $\leq$ $\pm$ 170.6 Hz	852.94	
				High Frequency	960 $\leq$ $\pm$ 192.0 Hz	959.99	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有振動信號	WCDMA B1	4370	Vibration Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4371	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4372	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4373	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有振動信號	WCDMA B1	4374	Vibration Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4375	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4376	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4377	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有振動信號	WCDMA B1	4378	Vibration Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4379	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4380	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4383	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有振動信號	WCDMA B1	4384	Vibration Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4385	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4386	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4387	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有振動信號	WCDMA B1	4388	Vibration Length Data			符合
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4389	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4390	Long Tone Length	2.00 $\pm$ 0.4 sec	2.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.49 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.01 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
			4391	Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Long Tone Length	2.00 $\pm$ 0.4 sec	2.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Interval	0.50 $\pm$ 0.1 sec	0.50 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	
				Short Tone Length	1.00 $\pm$ 0.2 sec	1.00 sec	

項次	檢驗項目及標準值	工作頻段	檢測頻道	檢驗結果			判定
11	災防告警細胞廣播訊息 接收功能 設備應具有振動信號	WCDMA B1	4392	Vibration Length Data			符合
				Long Tone Length	$2.00 \pm 0.4 \text{ sec}$	2.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Short Tone Length	$1.00 \pm 0.2 \text{ sec}$	1.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Short Tone Length	$1.00 \pm 0.2 \text{ sec}$	1.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Long Tone Length	$2.00 \pm 0.4 \text{ sec}$	2.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Short Tone Length	$1.00 \pm 0.2 \text{ sec}$	1.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Short Tone Length	$1.00 \pm 0.2 \text{ sec}$	1.00 sec	
			4393	Long Tone Length	$2.00 \pm 0.4 \text{ sec}$	2.01 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Short Tone Length	$1.00 \pm 0.2 \text{ sec}$	1.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Short Tone Length	$1.00 \pm 0.2 \text{ sec}$	1.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Long Tone Length	$2.00 \pm 0.4 \text{ sec}$	2.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Short Tone Length	$1.00 \pm 0.2 \text{ sec}$	1.00 sec	
				Interval	$0.50 \pm 0.1 \text{ sec}$	0.50 sec	
				Short Tone Length	$1.00 \pm 0.2 \text{ sec}$	1.00 sec	

Band 8					
項次	檢驗項目及標準	檢驗結果			判定
1	工作頻帶 Tx : 885 - 915 MHz Rx : 930 - 960 MHz	Tx : 885 - 915 MHz Rx : 930 - 960 MHz			符 合
2	收發頻率間隔 45 MHz	低頻道	頻道 2737	45 MHz	符 合
		中頻道	頻道 2800	45 MHz	
		高頻道	頻道 2863	45 MHz	
3	標稱頻道間隔 5 MHz	低頻道	頻道 2737	5 MHz	符 合
		中頻道	頻道 2800	5 MHz	
		高頻道	頻道 2863	5 MHz	
4	最大發射輸出功率 24 dBm +1.7/-3.7 dB (Class 3)	SIM1			符 合
		低頻道	頻道 2737	24.21 dBm	
		中頻道	頻道 2800	24.11 dBm	
		高頻道	頻道 2863	24.15 dBm	
		SIM2			
		低頻道	頻道 2737	23.88 dBm	
		中頻道	頻道 2800	23.84 dBm	
		高頻道	頻道 2863	23.92 dBm	


項次	檢驗項目及標準	判定
5	頻率穩定度 終端設備於常態環境常態電壓、低極端溫度低極端電壓、低極端溫度高極端電壓、高極端溫度低極端電壓、高極端溫度高極端電壓等五種測試環境下，分別進行頻率量測，經 0/2/5/10 分鐘量測結果，頻率應維持在頻道之主波頻率 0.1ppm 以內。	符合

工作頻段		Band 8				
Channel		2737				
Frequency(MHz)		887.4				
測試溫度/電壓	檢驗結果					
	0 分鐘	2 分鐘	5 分鐘	10 分鐘	單位	
TL/VL	0.008	-0.004	-0.005	-0.011	ppm	
TL/VH	0.005	0.001	0.000	-0.009	ppm	
TN/VN	-0.005	0.009	0.002	0.002	ppm	
TH/VL	0.003	0.002	0.007	-0.001	ppm	
TH/VH	0.007	0.007	-0.006	0.005	ppm	
Channel		2800				
Frequency(MHz)		900				
測試溫度/電壓	檢驗結果					
	0 分鐘	2 分鐘	5 分鐘	10 分鐘	單位	
TL/VL	0.008	-0.005	0.007	0.009	ppm	
TL/VH	-0.009	-0.005	0.009	0.003	ppm	
TN/VN	0.003	0.004	0.010	-0.005	ppm	
TH/VL	0.005	0.011	0.000	0.001	ppm	
TH/VH	-0.002	0.009	0.003	0.009	ppm	
Channel		2863				
Frequency(MHz)		912.6				
測試溫度/電壓	檢驗結果					
	0 分鐘	2 分鐘	5 分鐘	10 分鐘	單位	
TL/VL	-0.006	0.009	-0.009	0.004	ppm	
TL/VH	0.001	0.004	0.000	-0.002	ppm	
TN/VN	-0.008	0.014	0.013	0.005	ppm	
TH/VL	-0.011	0.001	0.009	0.009	ppm	
TH/VH	-0.003	0.008	0.011	0.000	ppm	

項次	檢驗項目及標準	檢驗結果				判定
6	功率控制狀態下之最小平均功率輸出 ≤ -50 dBm(in one time slot)	低頻道	頻道 2737	-57.48	dBm	符合
		中頻道	頻道 2800	-58.63	dBm	
		高頻道	頻道 2863	-57.66	dBm	
7	佔用頻道寬 ≤ 5 MHz	低頻道	頻道 2737	4.136	MHz	符合
		中頻道	頻道 2800	4.135	MHz	
		高頻道	頻道 2863	4.107	MHz	
8	發射頻譜波罩 符合[PLMN08]表一之三	低頻道	頻道 2737	請參考 4.2. 測試掃描圖 “發射頻譜波罩”		符合
		中頻道	頻道 2800			
		高頻道	頻道 2863			
9	鄰頻道洩漏功率比 偏移 ± 5 MHz 洩漏功率限制 ≤ 33 dB 偏移 ± 10 MHz 洩漏功率限制 ≤ 43 dB	低頻道	頻道 2737	± 5 MHz	-45.9 dB	符合
				± 10 MHz	-61.1 dB	
		中頻道	頻道 2800	± 5 MHz	-43.9 dB	
				± 10 MHz	-61.2 dB	
		高頻道	頻道 2863	± 5 MHz	-39.6 dB	
				± 10 MHz	-59.6 dB	

項次	檢驗項目及標準	檢驗結果	判定	
10	混附波輻射 表一之四	低頻道/中頻道/高頻道		
	Transmitter mode		請參閱附件	符合
	頻率範圍	最大允許值 / 測量頻寬		
	9 kHz ≤ f < 150 kHz	-36 dBm / 1 kHz		
	150 kHz ≤ f < 30 MHz	-36 dBm / 10 kHz		
	30 MHz ≤ f < 1000 MHz	-36 dBm / 100 kHz		
	1 GHz ≤ f < 12.75 GHz	-30 dBm / 1 MHz		
	Receiver mode			
	30 MHz ≤ f < 1000 MHz	-57 dBm / 100 kHz		
	1 GHz ≤ f ≤ 12.75 GHz	-47 dBm / 1 MHz		
	880 MHz ≤ f ≤ 915 MHz	-60 dBm / 3.84 MHz		
	835 MHz ≤ f ≤ 960 MHz	-60 dBm / 3.84 MHz		
	表一之八			
	Transmitter mode			
	頻率範圍	最大允許值 / 測量頻寬		
	462.5 MHz ≤ f ≤ 467.5 MHz	-50 dBm / 1 MHz		
	703 MHz ≤ f ≤ 803 MHz	-50 dBm / 1 MHz		
	791 MHz ≤ f ≤ 821 MHz	-60 dBm / 3.84 MHz		
	860 MHz ≤ f ≤ 890 MHz	-37 dBm / 1 MHz		
	925 MHz ≤ f ≤ 935 MHz	-67 dBm / 100 kHz (*1)		
		-60 dBm / 3.84 MHz(*2)		
	935 MHz ≤ f ≤ 960 MHz	-79 dBm / 100 kHz(*3)		
		-60 dBm / 3.84 MHz(*4)		
	1447 MHz ≤ f ≤ 1467 MHz	-50 dBm / 1 MHz		
	1452 MHz ≤ f ≤ 1496 MHz	-60 dBm / 3.84 MHz		
	1475.9 MHz ≤ f ≤ 1510.9 MHz	-60 dBm / 3.84 MHz		
	1805 MHz ≤ f ≤ 1830 MHz	-71 dBm / 100 kHz(*5)		
		-60 dBm / 3.84 MHz(*6)		
	1830 MHz ≤ f ≤ 1880 MHz	-71 dBm / 100 kHz(*7)		
		-60 dBm / 3.84 MHz(*8)		
	1880 MHz ≤ f ≤ 1920 MHz	-60 dBm / 3.84 MHz		
	1884.5 MHz ≤ f ≤ 1915.7 MHz	-41 dBm / 300 kHz		
	2010 MHz ≤ f ≤ 2025 MHz	-60 dBm / 3.84 MHz		
	2110 MHz ≤ f ≤ 2170 MHz	-60 dBm / 3.84 MHz		
	2170 MHz ≤ f ≤ 2200 MHz	-50 dBm / 1 MHz		
	2300 MHz ≤ f < 2400 MHz	-60 dBm / 3.84 MHz		
	2496 MHz ≤ f ≤ 2570 MHz	-50 dBm / 1 MHz		
	2570 MHz ≤ f ≤ 2640 MHz	-60 dBm / 3.84 MHz		
	2640 MHz ≤ f ≤ 2690 MHz	-60 dBm / 3.84 MHz		
	3510 MHz ≤ f ≤ 3590 MHz	-60 dBm / 3.84 MHz		
	3400 MHz ≤ f ≤ 3800 MHz	-50 dBm / 1 MHz		
	Receiver mode			
	30 MHz - 1000 MHz	請參閱附件	符合	
	1 GHz - 12.75 GHz			
	880 MHz - 915 MHz			
	835 MHz - 960 MHz			
	Note1: FL=The UE centre carrier frequency -12.5 MHz, FH=The UE centre carrier frequency +12.5 MHz			
	Note2: This requirement is applicable only when transmission is made between 900 MHz to 915 MHz			

4.2 測試掃描圖

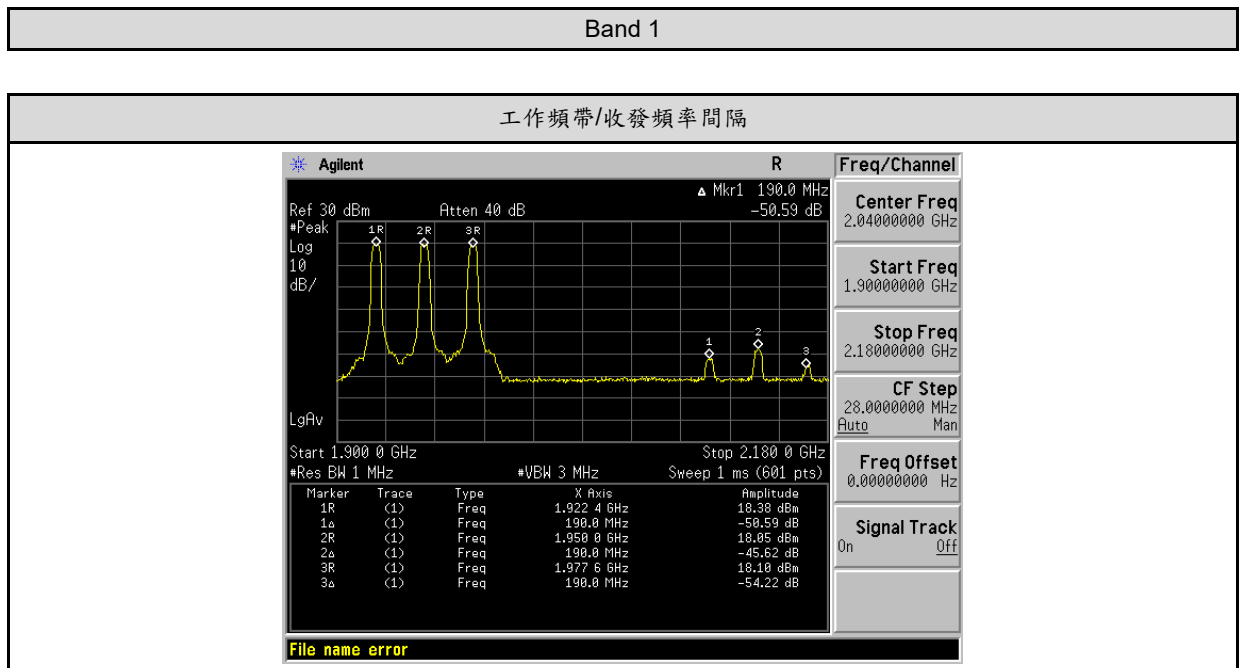

最大發射輸出功率 (SIM1)																												
低頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 23.05 dBm Continuous </td><td>DL Channel</td></tr><tr><td>10562</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 11</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 23.05 dBm Continuous	DL Channel	10562	Uplink Channel	Auto	Band Arbitrator	Band 11	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 23.05 dBm Continuous	DL Channel																									
			10562																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 11																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										
中頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 23.21 dBm Continuous </td><td>DL Channel</td></tr><tr><td>10700</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 11</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 23.21 dBm Continuous	DL Channel	10700	Uplink Channel	Auto	Band Arbitrator	Band 11	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 23.21 dBm Continuous	DL Channel																									
			10700																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 11																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										
高頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 23.23 dBm Continuous </td><td>DL Channel</td></tr><tr><td>10838</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 11</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 23.23 dBm Continuous	DL Channel	10838	Uplink Channel	Auto	Band Arbitrator	Band 11	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 23.23 dBm Continuous	DL Channel																									
			10838																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 11																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										

最大發射輸出功率 (SIM2)																																																																																																																	
低頻道	<table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.82 dBm Continuous </td><td>DL Channel 10562</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr><tr><td rowspan="3">中頻道</td><td colspan="3"><table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.94 dBm Continuous </td><td>DL Channel 10700</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr><tr><td rowspan="3">高頻道</td><td colspan="3"><table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr></table></td></tr></table></td></tr></table>			Measurement/Instrument Screen			<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.82 dBm Continuous </td><td>DL Channel 10562</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.82 dBm Continuous	DL Channel 10562		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On	Transmit SIB5bis Std Bands		Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset								中頻道	<table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.94 dBm Continuous </td><td>DL Channel 10700</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr><tr><td rowspan="3">高頻道</td><td colspan="3"><table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr></table></td></tr></table>			Measurement/Instrument Screen			<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.94 dBm Continuous </td><td>DL Channel 10700</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.94 dBm Continuous	DL Channel 10700		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On	Transmit SIB5bis Std Bands		Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset								高頻道	<table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr></table>			Measurement/Instrument Screen			<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.98 dBm Continuous	DL Channel 10838		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On	Transmit SIB5bis Std Bands		Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset							
	Measurement/Instrument Screen																																																																																																																
	<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.82 dBm Continuous </td><td>DL Channel 10562</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.82 dBm Continuous	DL Channel 10562		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On		Transmit SIB5bis Std Bands			Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																							
Control	Thermal Power	UARFCN Params																																																																																																															
Thermal Power Setup ▾	Thermal Power 22.82 dBm Continuous	DL Channel 10562																																																																																																															
		Uplink Channel Auto																																																																																																															
		Band Arbitrator Band 1U																																																																																																															
		Freq Band Ind On																																																																																																															
		Transmit SIB5bis Std Bands																																																																																																															
	Return																																																																																																																
	<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																																								
	Active Cell Connected	Sys Type: UTRA FDD																																																																																																															
1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																																													
	IntRef	Offset																																																																																																															
中頻道	<table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.94 dBm Continuous </td><td>DL Channel 10700</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr><tr><td rowspan="3">高頻道</td><td colspan="3"><table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr></table></td></tr></table>			Measurement/Instrument Screen			<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.94 dBm Continuous </td><td>DL Channel 10700</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.94 dBm Continuous	DL Channel 10700		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On	Transmit SIB5bis Std Bands		Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset								高頻道	<table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr></table>			Measurement/Instrument Screen			<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.98 dBm Continuous	DL Channel 10838		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On	Transmit SIB5bis Std Bands		Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																													
	Measurement/Instrument Screen																																																																																																																
	<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.94 dBm Continuous </td><td>DL Channel 10700</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.94 dBm Continuous	DL Channel 10700		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On		Transmit SIB5bis Std Bands			Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																							
Control	Thermal Power	UARFCN Params																																																																																																															
Thermal Power Setup ▾	Thermal Power 22.94 dBm Continuous	DL Channel 10700																																																																																																															
		Uplink Channel Auto																																																																																																															
		Band Arbitrator Band 1U																																																																																																															
		Freq Band Ind On																																																																																																															
		Transmit SIB5bis Std Bands																																																																																																															
	Return																																																																																																																
	<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																																								
	Active Cell Connected	Sys Type: UTRA FDD																																																																																																															
1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																																													
	IntRef	Offset																																																																																																															
高頻道	<table><tr><th colspan="3">Measurement/Instrument Screen</th></tr><tr><td><table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table></td></tr></table>			Measurement/Instrument Screen			<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.98 dBm Continuous	DL Channel 10838		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On	Transmit SIB5bis Std Bands		Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																			
	Measurement/Instrument Screen																																																																																																																
	<table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td>Thermal Power Setup ▾</td><td rowspan="5"> Thermal Power 22.98 dBm Continuous </td><td>DL Channel 10838</td></tr><tr><td rowspan="4"></td><td>Uplink Channel Auto</td></tr><tr><td>Band Arbitrator Band 1U</td></tr><tr><td>Freq Band Ind On</td></tr><tr><td>Transmit SIB5bis Std Bands</td></tr><tr><td></td><td>Return</td></tr><tr><td></td><td><table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table></td></tr><tr><td colspan="3"></td></tr></table>	Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 22.98 dBm Continuous	DL Channel 10838		Uplink Channel Auto	Band Arbitrator Band 1U	Freq Band Ind On		Transmit SIB5bis Std Bands			Return		<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																							
Control	Thermal Power	UARFCN Params																																																																																																															
Thermal Power Setup ▾	Thermal Power 22.98 dBm Continuous	DL Channel 10838																																																																																																															
		Uplink Channel Auto																																																																																																															
		Band Arbitrator Band 1U																																																																																																															
		Freq Band Ind On																																																																																																															
		Transmit SIB5bis Std Bands																																																																																																															
	Return																																																																																																																
	<table><tr><td></td><td>Active Cell Connected</td><td>Sys Type: UTRA FDD</td></tr><tr><td>1 of 2</td><td><table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table></td><td></td></tr></table>		Active Cell Connected	Sys Type: UTRA FDD	1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																																								
	Active Cell Connected	Sys Type: UTRA FDD																																																																																																															
1 of 2	<table><tr><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td></tr></table>		IntRef	Offset																																																																																																													
	IntRef	Offset																																																																																																															

最小輸出平均功率																																																																																								
低頻道	Measurement/Instrument Screen <table><tr><td>Handovers</td><td colspan="6">Channel Power</td><td colspan="2">UARFCN Parms</td></tr><tr><td>Physical Chan Reconfig</td><td colspan="6" rowspan="5">Channel Power -57.58 dBm</td><td colspan="2">DL Channel</td></tr><tr><td></td><td colspan="2">10562</td></tr><tr><td>Transport Chan Reconfig</td><td colspan="2">Uplink Channel</td></tr><tr><td></td><td colspan="2">Auto</td></tr><tr><td>System Handover</td><td colspan="2">Band Arbitrator</td></tr><tr><td></td><td colspan="6">Continuous</td><td colspan="2">Band 01</td></tr><tr><td></td><td colspan="6" rowspan="5"></td><td colspan="2">Freq Band Ind</td></tr><tr><td></td><td colspan="2">On</td></tr><tr><td>Radio Bearer Reconfig</td><td colspan="2">Transmit SIB5bis</td></tr><tr><td></td><td colspan="2">Std Bands</td></tr><tr><td>Return</td><td colspan="2">Return</td></tr><tr><td></td><td colspan="4">Active Cell Connected</td><td colspan="2">Sys Type: UTRA FDD</td><td colspan="2"></td></tr><tr><td></td><td></td><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td><td></td></tr></table>										Handovers	Channel Power						UARFCN Parms		Physical Chan Reconfig	Channel Power -57.58 dBm						DL Channel			10562		Transport Chan Reconfig	Uplink Channel			Auto		System Handover	Band Arbitrator			Continuous						Band 01									Freq Band Ind			On		Radio Bearer Reconfig	Transmit SIB5bis			Std Bands		Return	Return			Active Cell Connected				Sys Type: UTRA FDD							IntRef	Offset				
	Handovers	Channel Power						UARFCN Parms																																																																																
	Physical Chan Reconfig	Channel Power -57.58 dBm						DL Channel																																																																																
								10562																																																																																
	Transport Chan Reconfig							Uplink Channel																																																																																
								Auto																																																																																
	System Handover							Band Arbitrator																																																																																
		Continuous						Band 01																																																																																
								Freq Band Ind																																																																																
								On																																																																																
Radio Bearer Reconfig	Transmit SIB5bis																																																																																							
	Std Bands																																																																																							
Return	Return																																																																																							
	Active Cell Connected				Sys Type: UTRA FDD																																																																																			
			IntRef	Offset																																																																																				
中頻道	Measurement/Instrument Screen <table><tr><td>Handovers</td><td colspan="6">Channel Power</td><td colspan="2">UARFCN Parms</td></tr><tr><td>Physical Chan Reconfig</td><td colspan="6" rowspan="5">Channel Power -57.75 dBm</td><td colspan="2">DL Channel</td></tr><tr><td></td><td colspan="2">10700</td></tr><tr><td>Transport Chan Reconfig</td><td colspan="2">Uplink Channel</td></tr><tr><td></td><td colspan="2">Auto</td></tr><tr><td>System Handover</td><td colspan="2">Band Arbitrator</td></tr><tr><td></td><td colspan="6">Continuous</td><td colspan="2">Band 01</td></tr><tr><td></td><td colspan="6" rowspan="5"></td><td colspan="2">Freq Band Ind</td></tr><tr><td></td><td colspan="2">On</td></tr><tr><td>Radio Bearer Reconfig</td><td colspan="2">Transmit SIB5bis</td></tr><tr><td></td><td colspan="2">Std Bands</td></tr><tr><td>Return</td><td colspan="2">Return</td></tr><tr><td></td><td colspan="4">Active Cell Connected</td><td colspan="2">Sys Type: UTRA FDD</td><td colspan="2"></td></tr><tr><td></td><td></td><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td><td></td></tr></table>										Handovers	Channel Power						UARFCN Parms		Physical Chan Reconfig	Channel Power -57.75 dBm						DL Channel			10700		Transport Chan Reconfig	Uplink Channel			Auto		System Handover	Band Arbitrator			Continuous						Band 01									Freq Band Ind			On		Radio Bearer Reconfig	Transmit SIB5bis			Std Bands		Return	Return			Active Cell Connected				Sys Type: UTRA FDD							IntRef	Offset				
	Handovers	Channel Power						UARFCN Parms																																																																																
	Physical Chan Reconfig	Channel Power -57.75 dBm						DL Channel																																																																																
								10700																																																																																
	Transport Chan Reconfig							Uplink Channel																																																																																
								Auto																																																																																
	System Handover							Band Arbitrator																																																																																
		Continuous						Band 01																																																																																
								Freq Band Ind																																																																																
								On																																																																																
Radio Bearer Reconfig	Transmit SIB5bis																																																																																							
	Std Bands																																																																																							
Return	Return																																																																																							
	Active Cell Connected				Sys Type: UTRA FDD																																																																																			
			IntRef	Offset																																																																																				
高頻道	Measurement/Instrument Screen <table><tr><td>Handovers</td><td colspan="6">Channel Power</td><td colspan="2">UARFCN Parms</td></tr><tr><td>Physical Chan Reconfig</td><td colspan="6" rowspan="5">Channel Power -57.36 dBm</td><td colspan="2">DL Channel</td></tr><tr><td></td><td colspan="2">10838</td></tr><tr><td>Transport Chan Reconfig</td><td colspan="2">Uplink Channel</td></tr><tr><td></td><td colspan="2">Auto</td></tr><tr><td>System Handover</td><td colspan="2">Band Arbitrator</td></tr><tr><td></td><td colspan="6">Continuous</td><td colspan="2">Band 01</td></tr><tr><td></td><td colspan="6" rowspan="5"></td><td colspan="2">Freq Band Ind</td></tr><tr><td></td><td colspan="2">On</td></tr><tr><td>Radio Bearer Reconfig</td><td colspan="2">Transmit SIB5bis</td></tr><tr><td></td><td colspan="2">Std Bands</td></tr><tr><td>Return</td><td colspan="2">Return</td></tr><tr><td></td><td colspan="4">Active Cell Connected</td><td colspan="2">Sys Type: UTRA FDD</td><td colspan="2"></td></tr><tr><td></td><td></td><td></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td><td></td></tr></table>										Handovers	Channel Power						UARFCN Parms		Physical Chan Reconfig	Channel Power -57.36 dBm						DL Channel			10838		Transport Chan Reconfig	Uplink Channel			Auto		System Handover	Band Arbitrator			Continuous						Band 01									Freq Band Ind			On		Radio Bearer Reconfig	Transmit SIB5bis			Std Bands		Return	Return			Active Cell Connected				Sys Type: UTRA FDD							IntRef	Offset				
	Handovers	Channel Power						UARFCN Parms																																																																																
	Physical Chan Reconfig	Channel Power -57.36 dBm						DL Channel																																																																																
								10838																																																																																
	Transport Chan Reconfig							Uplink Channel																																																																																
								Auto																																																																																
	System Handover							Band Arbitrator																																																																																
		Continuous						Band 01																																																																																
								Freq Band Ind																																																																																
								On																																																																																
Radio Bearer Reconfig	Transmit SIB5bis																																																																																							
	Std Bands																																																																																							
Return	Return																																																																																							
	Active Cell Connected				Sys Type: UTRA FDD																																																																																			
			IntRef	Offset																																																																																				

佔用頻道寬

低頻道

Measurement/Instrument Screen				
Handovers	Occupied Bandwidth			UARFCN Params
Physical Chan Reconfig	Occupied Bandwidth 4.112 MHz Lower Frequency:1920.33 MHz Upper Frequency:1924.44 MHz			DL Channel
				10562
Transport Chan Reconfig				Uplink Channel
				Auto
System Handover				Band Arbitrator
	Continuous			Band 10
				Freq Band Ind
				On
Radio Bearer Reconfig				Transmit SIB5bis
				Std Bands
Return				Return
	Active Cell Connected Sys Type: UTRA FDD			
	IntRef Offset			

中頻道

Measurement/Instrument Screen				
Handovers	Occupied Bandwidth			UARFCN Params
Physical Chan Reconfig	Occupied Bandwidth 4.118 MHz Lower Frequency:1947.93 MHz Upper Frequency:1952.05 MHz			DL Channel
				10700
Transport Chan Reconfig				Uplink Channel
				Auto
System Handover				Band Arbitrator
	Continuous			Band 10
				Freq Band Ind
				On
Radio Bearer Reconfig				Transmit SIB5bis
				Std Bands
Return				Return
	Active Cell Connected Sys Type: UTRA FDD			
	IntRef Offset			


高頻道

Measurement/Instrument Screen				
Handovers	Occupied Bandwidth			UARFCN Params
Physical Chan Reconfig	Occupied Bandwidth 4.153 MHz Lower Frequency:1975.50 MHz Upper Frequency:1979.66 MHz			DL Channel
				10838
Transport Chan Reconfig				Uplink Channel
				Auto
System Handover				Band Arbitrator
	Continuous			Band 10
				Freq Band Ind
				On
Radio Bearer Reconfig				Transmit SIB5bis
				Std Bands
Return				Return
	Active Cell Connected Sys Type: UTRA FDD			
	IntRef Offset			


發射頻譜波罩	
低頻道	Measurement/Instrument Screen Spectrum Emission Mask Control SEN Setup Numeric Graph Calibrate Measurements 1 of 2 Active Cell Connected Sys Type: UTRA FDD IntRef Offset UARFCN Params DL Channel 10562 Uplink Channel Auto Band Arbitrator Band 01 Freq Band Ind On Transmit SIB5bis Std Bands Return In-Channel Power: 22.81 dBm/3.84 MHz Continuous Ref -20 dBc 10.00 dB/ Ref 2.81 dBm 10.00 dB/ Range(11Hz) -12.5 MHz -2.5 MHz 2.5 MHz 12.5 MHz Freq(11Hz) 3.455 4.250 6.500 9.500 Lev -61.30 dBc -50.64 dBc -60.04 dBc -58.41 dBc Margin(dB) 11.38 14.89 11.04 9.41 1 2.5 ~ 3.5 Pass 2 3.5 ~ 7.5 Pass 3 7.5 ~ 8.5 Pass 4 8.5 ~ 12.5 Pass R1 2.5 ~ 3.5 dBm R2 3.5 ~ 12.5 dBm
中頻道	Measurement/Instrument Screen Spectrum Emission Mask Control SEN Setup Numeric Graph Calibrate Measurements 1 of 2 Active Cell Connected Sys Type: UTRA FDD IntRef Offset UARFCN Params DL Channel 10700 Uplink Channel Auto Band Arbitrator Band 01 Freq Band Ind On Transmit SIB5bis Std Bands Return In-Channel Power: 22.93 dBm/3.84 MHz Continuous Ref -20 dBc 10.00 dB/ Ref 2.93 dBm 10.00 dB/ Range(11Hz) -12.5 MHz -2.5 MHz 2.5 MHz 12.5 MHz Freq(11Hz) 3.475 4.000 6.500 9.250 Lev -60.92 dBc -46.75 dBc -59.53 dBc -58.53 dBc Margin(dB) 11.29 11.25 10.53 9.53 1 2.5 ~ 3.5 Pass 2 3.5 ~ 7.5 Pass 3 7.5 ~ 8.5 Pass 4 8.5 ~ 12.5 Pass R1 2.5 ~ 3.5 dBm R2 3.5 ~ 12.5 dBm
高頻道	Measurement/Instrument Screen Spectrum Emission Mask Control SEN Setup Numeric Graph Calibrate Measurements 1 of 2 Active Cell Connected Sys Type: UTRA FDD IntRef Offset UARFCN Params DL Channel 10838 Uplink Channel Auto Band Arbitrator Band 01 Freq Band Ind On Transmit SIB5bis Std Bands Return In-Channel Power: 23.03 dBm/3.84 MHz Continuous Ref -20 dBc 10.00 dB/ Ref 3.03 dBm 10.00 dB/ Range(11Hz) -12.5 MHz -2.5 MHz 2.5 MHz 12.5 MHz Freq(11Hz) 3.485 4.000 6.500 9.500 Lev -63.93 dBc -49.80 dBc -62.25 dBc -59.89 dBc Margin(dB) 14.16 14.30 13.25 10.89 1 2.5 ~ 3.5 Pass 2 3.5 ~ 7.5 Pass 3 7.5 ~ 8.5 Pass 4 8.5 ~ 12.5 Pass R1 2.5 ~ 3.5 dBm R2 3.5 ~ 12.5 dBm

鄰頻道洩漏功率比


低頻道

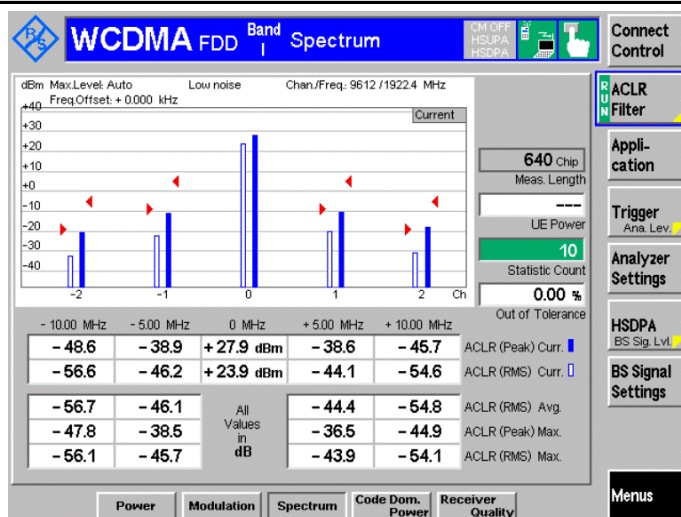

中頻道

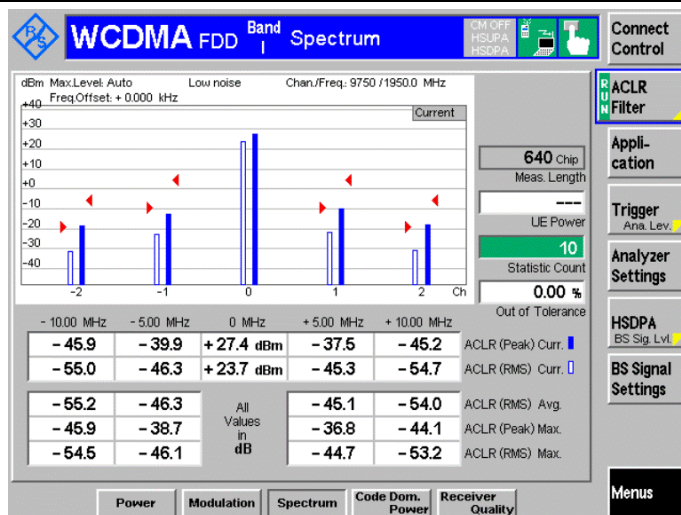


高頻道

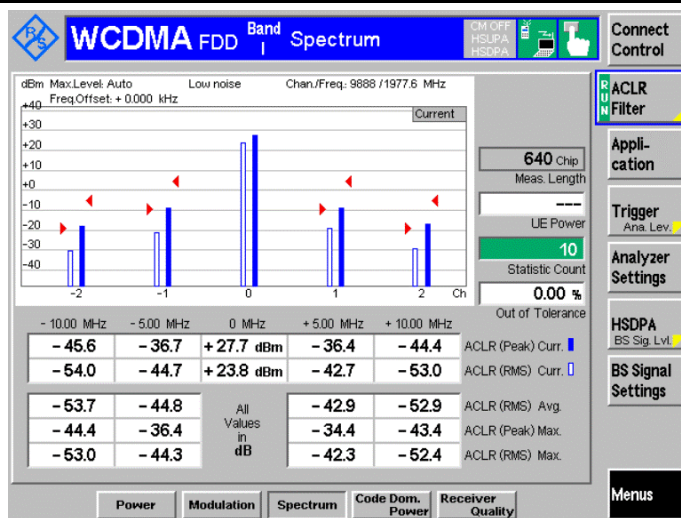

Band 8

工作頻帶/收發頻率間隔

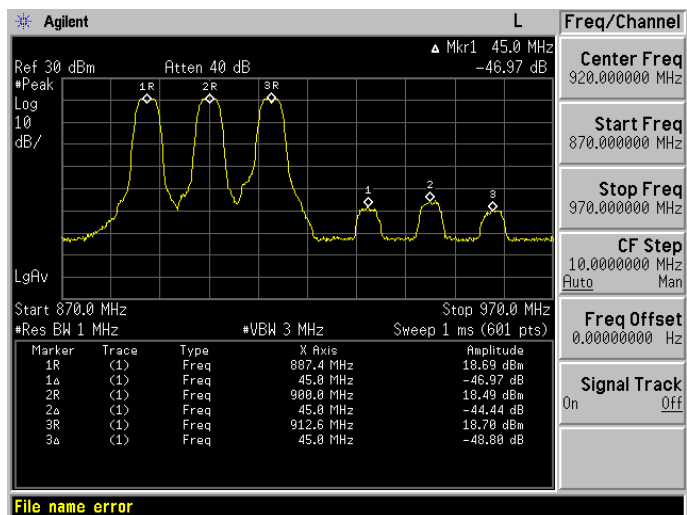

最大發射輸出功率 (SIM1)																												
低頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 24.21 dBm Continuous </td><td>DL Channel</td></tr><tr><td>2962</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 1U</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 24.21 dBm Continuous	DL Channel	2962	Uplink Channel	Auto	Band Arbitrator	Band 1U	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 24.21 dBm Continuous	DL Channel																									
			2962																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 1U																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										
中頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 24.11 dBm Continuous </td><td>DL Channel</td></tr><tr><td>3025</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 1U</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 24.11 dBm Continuous	DL Channel	3025	Uplink Channel	Auto	Band Arbitrator	Band 1U	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 24.11 dBm Continuous	DL Channel																									
			3025																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 1U																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										
高頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 24.15 dBm Continuous </td><td>DL Channel</td></tr><tr><td>3088</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 1U</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 24.15 dBm Continuous	DL Channel	3088	Uplink Channel	Auto	Band Arbitrator	Band 1U	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 24.15 dBm Continuous	DL Channel																									
			3088																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 1U																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										

最大發射輸出功率 (SIM2)																												
低頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 23.88 dBm Continuous </td><td>DL Channel</td></tr><tr><td>2962</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 3U</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 23.88 dBm Continuous	DL Channel	2962	Uplink Channel	Auto	Band Arbitrator	Band 3U	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 23.88 dBm Continuous	DL Channel																									
			2962																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 3U																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										
中頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 23.84 dBm Continuous </td><td>DL Channel</td></tr><tr><td>3025</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 3U</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 23.84 dBm Continuous	DL Channel	3025	Uplink Channel	Auto	Band Arbitrator	Band 3U	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 23.84 dBm Continuous	DL Channel																									
			3025																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 3U																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										
高頻道	Measurement/Instrument Screen <table><tr><th>Control</th><th>Thermal Power</th><th>UARFCN Params</th></tr><tr><td rowspan="10">Thermal Power Setup ▾</td><td rowspan="10"> Thermal Power 23.92 dBm Continuous </td><td>DL Channel</td></tr><tr><td>3088</td></tr><tr><td>Uplink Channel</td></tr><tr><td>Auto</td></tr><tr><td>Band Arbitrator</td></tr><tr><td>Band 3U</td></tr><tr><td>Freq Band Ind</td></tr><tr><td>On</td></tr><tr><td>Transmit SIB5bis</td></tr><tr><td>Std Bands</td></tr><tr><td>Return</td></tr><tr><td></td><td>Active Cell</td><td>Sys Type: UTRA FDD</td></tr><tr><td></td><td>Connected</td><td></td></tr><tr><td>1 of 2</td><td>IntRef</td><td>Offset</td></tr></table>			Control	Thermal Power	UARFCN Params	Thermal Power Setup ▾	Thermal Power 23.92 dBm Continuous	DL Channel	3088	Uplink Channel	Auto	Band Arbitrator	Band 3U	Freq Band Ind	On	Transmit SIB5bis	Std Bands	Return		Active Cell	Sys Type: UTRA FDD		Connected		1 of 2	IntRef	Offset
	Control	Thermal Power	UARFCN Params																									
	Thermal Power Setup ▾	Thermal Power 23.92 dBm Continuous	DL Channel																									
			3088																									
			Uplink Channel																									
			Auto																									
			Band Arbitrator																									
			Band 3U																									
			Freq Band Ind																									
			On																									
Transmit SIB5bis																												
Std Bands																												
Return																												
	Active Cell	Sys Type: UTRA FDD																										
	Connected																											
1 of 2	IntRef	Offset																										

最小輸出平均功率										
低頻道	Measurement/Instrument Screen									
	Handovers		Channel Power						UARFCN Params	
	Physical Chan Reconfig		Channel Power -57.48 dBm						DL Channel	
									2962	
	Transport Chan Reconfig								Uplink Channel	
									Auto	
	System Handover		Continuous						Band Arbitrator	
									Band 1U	
									Freq Band Ind	
									On	
Radio Bearer Reconfig								Transmit SIB5bis		
								Std Bands		
Return								Return		
				Active Cell		Sys Type: UTRA FDD				
				Connected						
				IntRef		Offset				
中頻道	Measurement/Instrument Screen									
	Handovers		Channel Power						UARFCN Params	
	Physical Chan Reconfig		Channel Power -58.63 dBm						DL Channel	
									3025	
	Transport Chan Reconfig								Uplink Channel	
									Auto	
	System Handover		Continuous						Band Arbitrator	
									Band 1U	
									Freq Band Ind	
									On	
Radio Bearer Reconfig								Transmit SIB5bis		
								Std Bands		
Return								Return		
				Active Cell		Sys Type: UTRA FDD				
				Connected						
				IntRef		Offset				
高頻道	Measurement/Instrument Screen									
	Handovers		Channel Power						UARFCN Params	
	Physical Chan Reconfig		Channel Power -57.66 dBm						DL Channel	
									3088	
	Transport Chan Reconfig								Uplink Channel	
									Auto	
	System Handover		Continuous						Band Arbitrator	
									Band 1U	
									Freq Band Ind	
									On	
Radio Bearer Reconfig								Transmit SIB5bis		
								Std Bands		
Return								Return		
				Active Cell		Sys Type: UTRA FDD				
				Connected						
				IntRef		Offset				

佔用頻道寬

低頻道


Measurement/Instrument Screen				
Handovers	Occupied Bandwidth			UARFCN Params
Physical Chan Reconfig	Occupied Bandwidth 4.136 MHz Lower Frequency: 885.31 MHz Upper Frequency: 889.44 MHz Continuous			DL Channel
				2962
Transport Chan Reconfig				Uplink Channel
				Auto
System Handover				Band Arbitrator
		Band 1U		
		Freq Band Ind	On	
		Transmit SIB5bis	Std Bands	
Radio Bearer Reconfig				
Return			Return	
		Active Cell	Sys Type: UTRA FDD	
		Connected		
		IntRef	Offset	

中頻道

Measurement/Instrument Screen				
Handovers	Occupied Bandwidth			UARFCN Params
Physical Chan Reconfig	Occupied Bandwidth 4.135 MHz Lower Frequency: 897.92 MHz Upper Frequency: 902.05 MHz Continuous			DL Channel
				3025
Transport Chan Reconfig				Uplink Channel
				Auto
System Handover				Band Arbitrator
		Band 1U		
		Freq Band Ind	On	
		Transmit SIB5bis	Std Bands	
Radio Bearer Reconfig				
Return			Return	
		Active Cell	Sys Type: UTRA FDD	
		Connected		
		IntRef	Offset	


高頻道

Measurement/Instrument Screen				
Handovers	Occupied Bandwidth			UARFCN Params
Physical Chan Reconfig	Occupied Bandwidth 4.107 MHz Lower Frequency: 910.51 MHz Upper Frequency: 914.62 MHz Continuous			DL Channel
				3088
Transport Chan Reconfig				Uplink Channel
				Auto
System Handover				Band Arbitrator
		Band 1U		
		Freq Band Ind	On	
		Transmit SIB5bis	Std Bands	
Radio Bearer Reconfig				
Return			Return	
		Active Cell	Sys Type: UTRA FDD	
		Connected		
		IntRef	Offset	

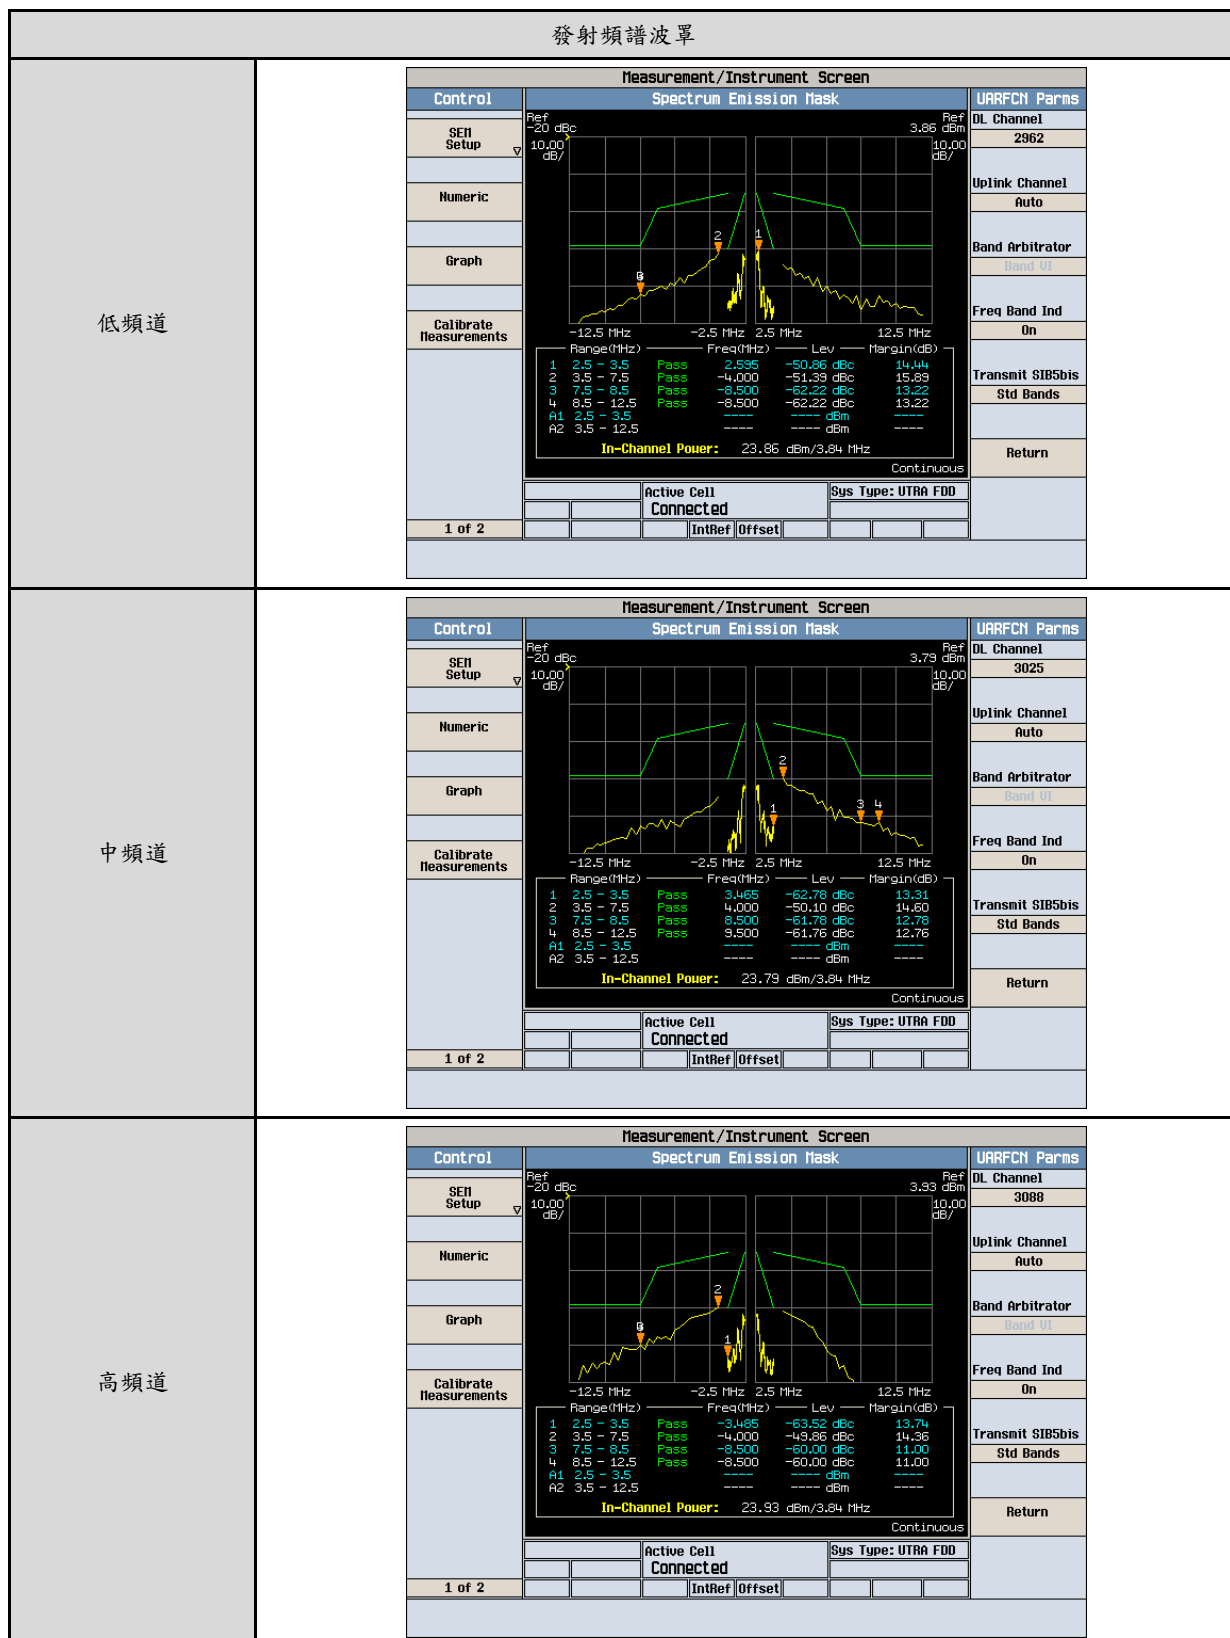


鄰頻道洩漏功率比


低頻道

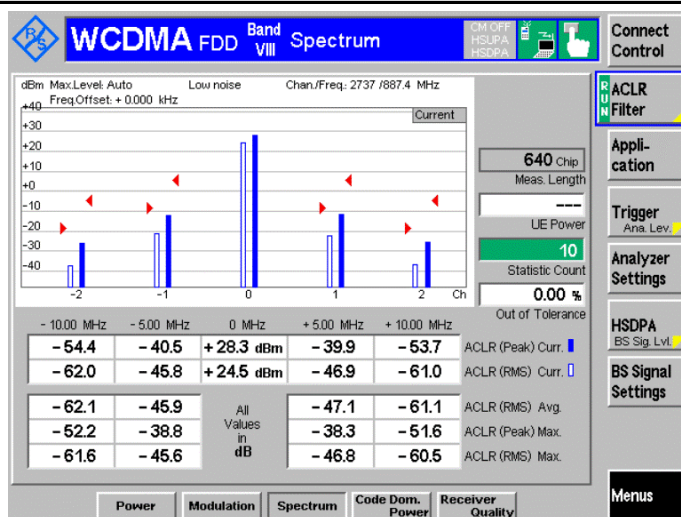


中頻道


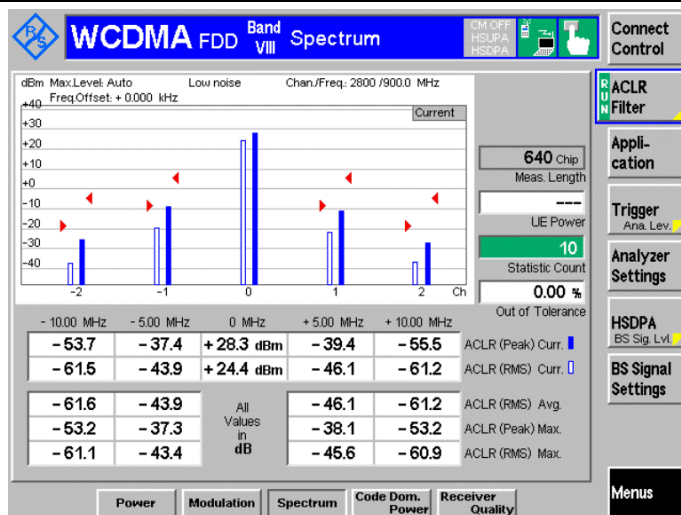



高頻道

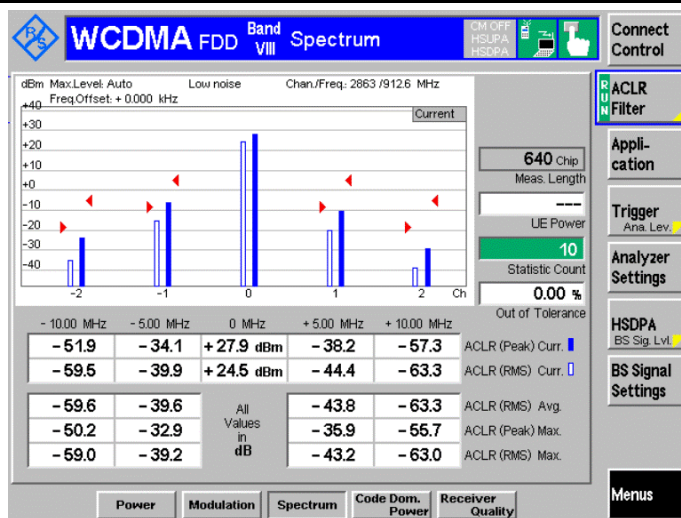



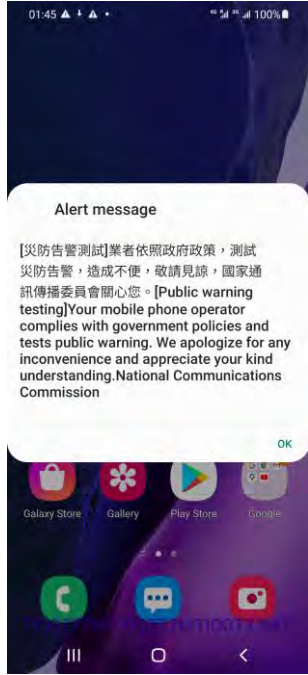
災防告警細胞廣播訊息畫面	
911	
919	

災防告警細胞廣播訊息畫面	
4370	
4371	

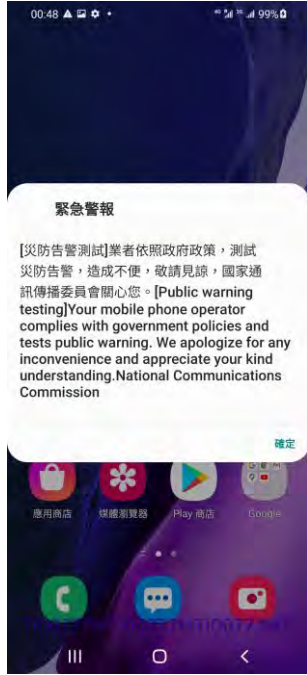
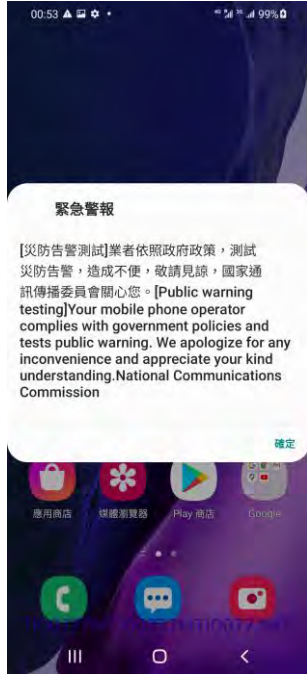
災防告警細胞廣播訊息畫面	
4372	
4373	


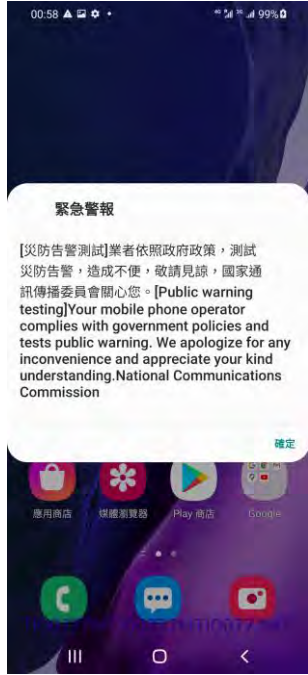
災防告警細胞廣播訊息畫面	
4374	
4375	


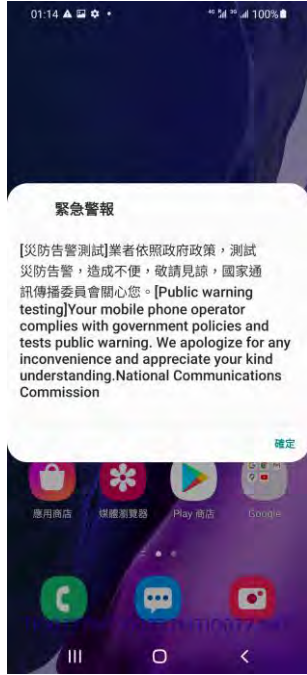
災防告警細胞廣播訊息畫面	
4376	
4377	

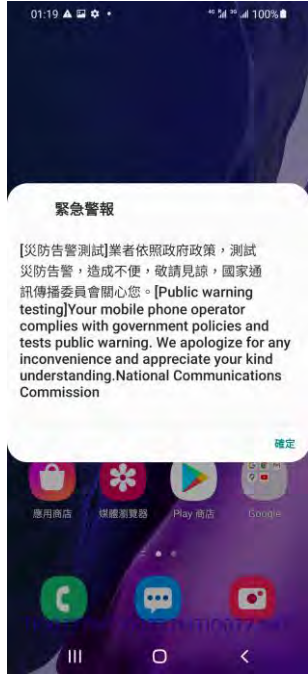
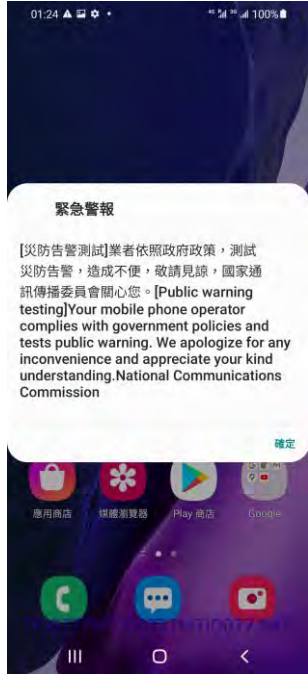
災防告警細胞廣播訊息畫面	
4378	
4379	



災防告警細胞廣播訊息畫面	
4380	
4383	

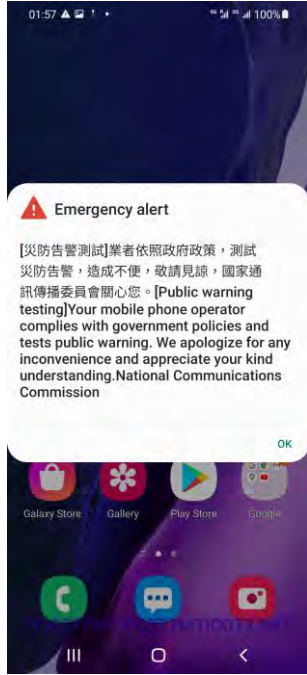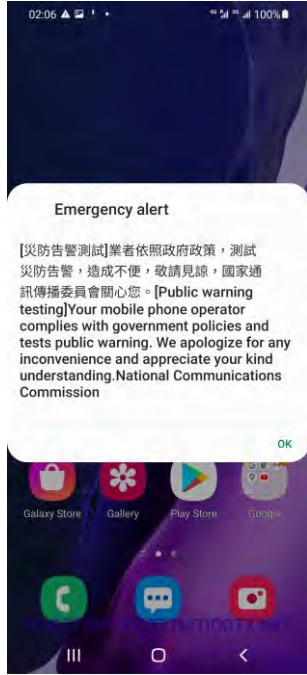
災防告警細胞廣播訊息畫面	
4384	
4385	

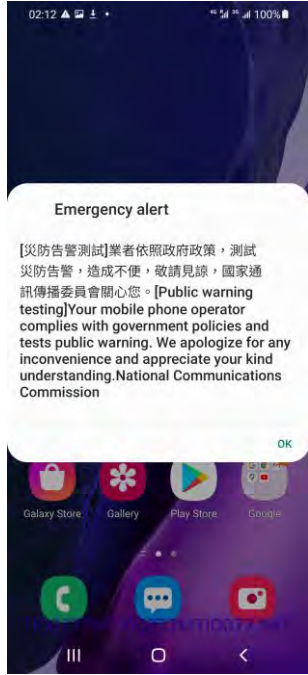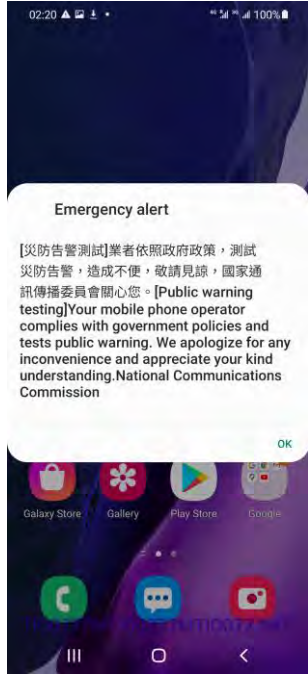
災防告警細胞廣播訊息畫面	
4386	
4387	

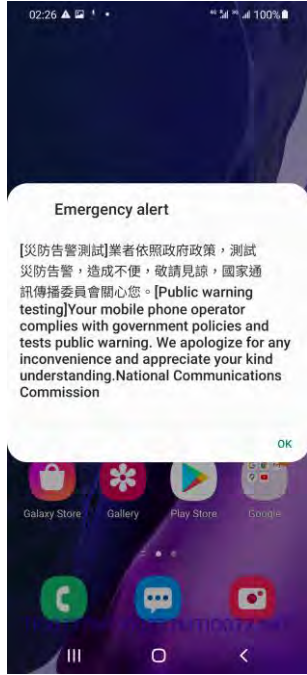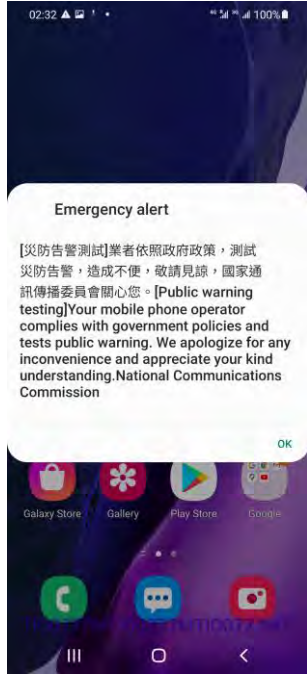
災防告警細胞廣播訊息畫面	
4388	
4389	

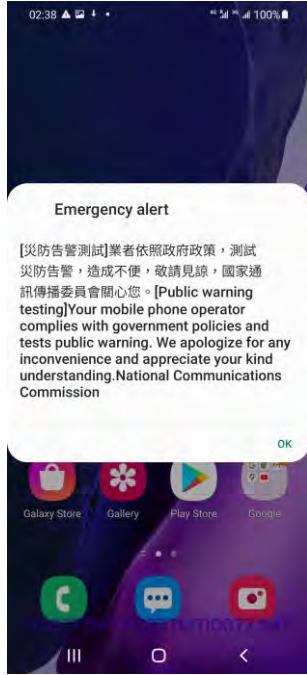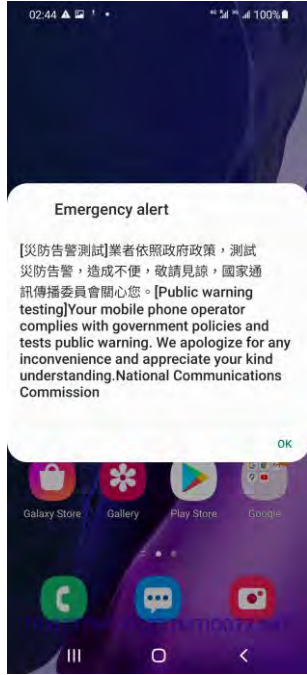
災防告警細胞廣播訊息畫面	
4390	
4391	

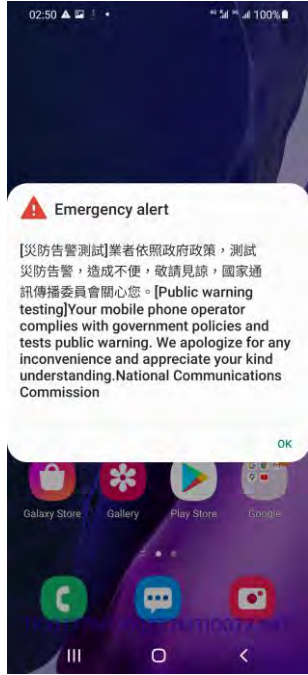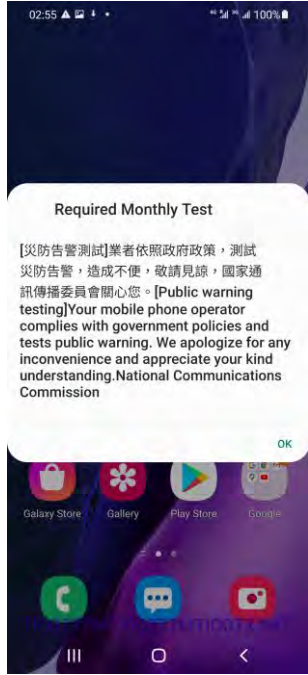
災防告警細胞廣播訊息畫面	
4392	
4393	

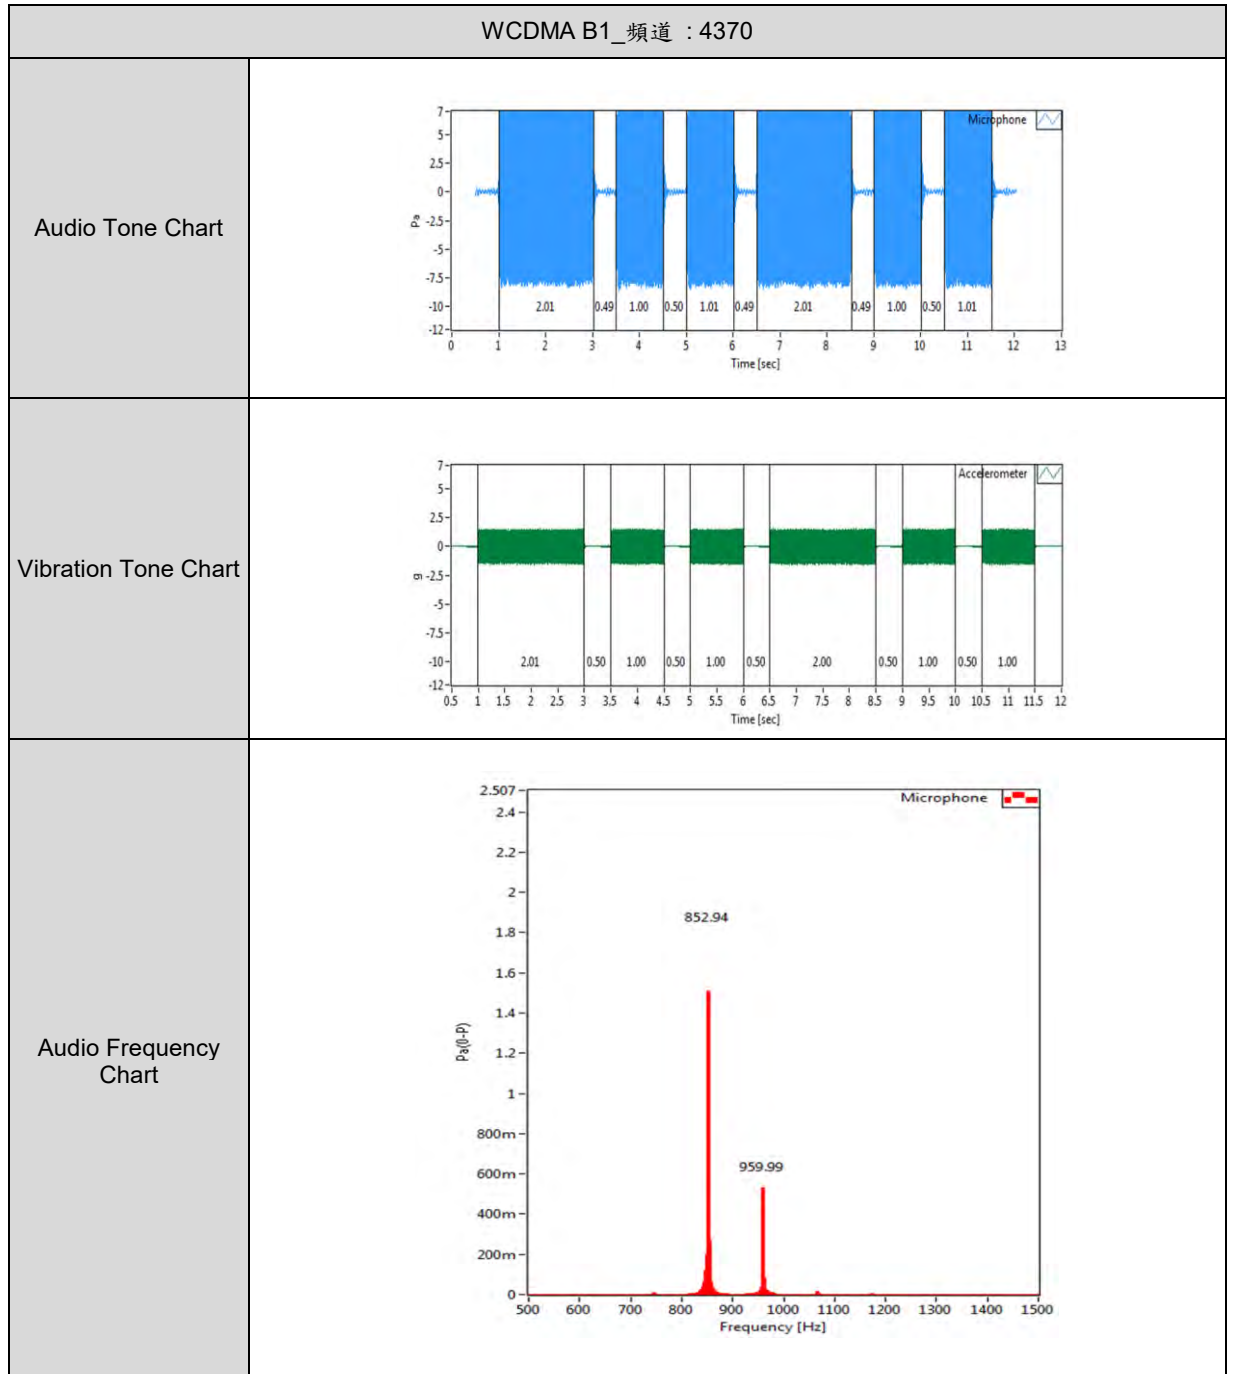


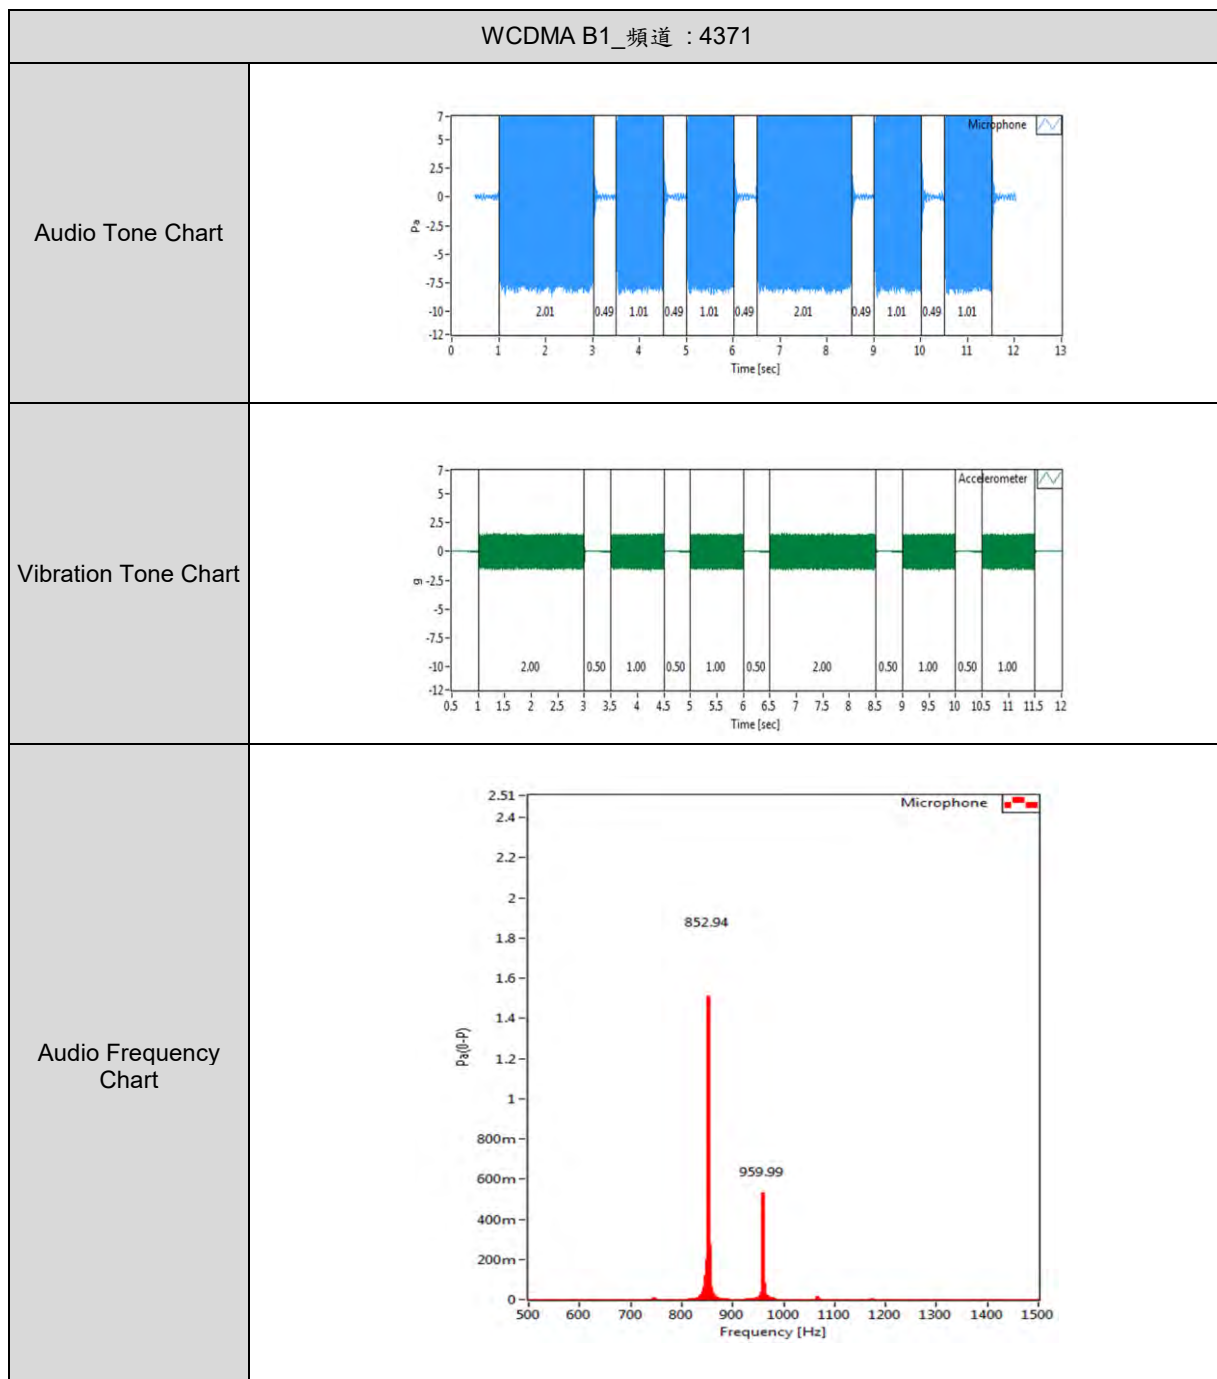


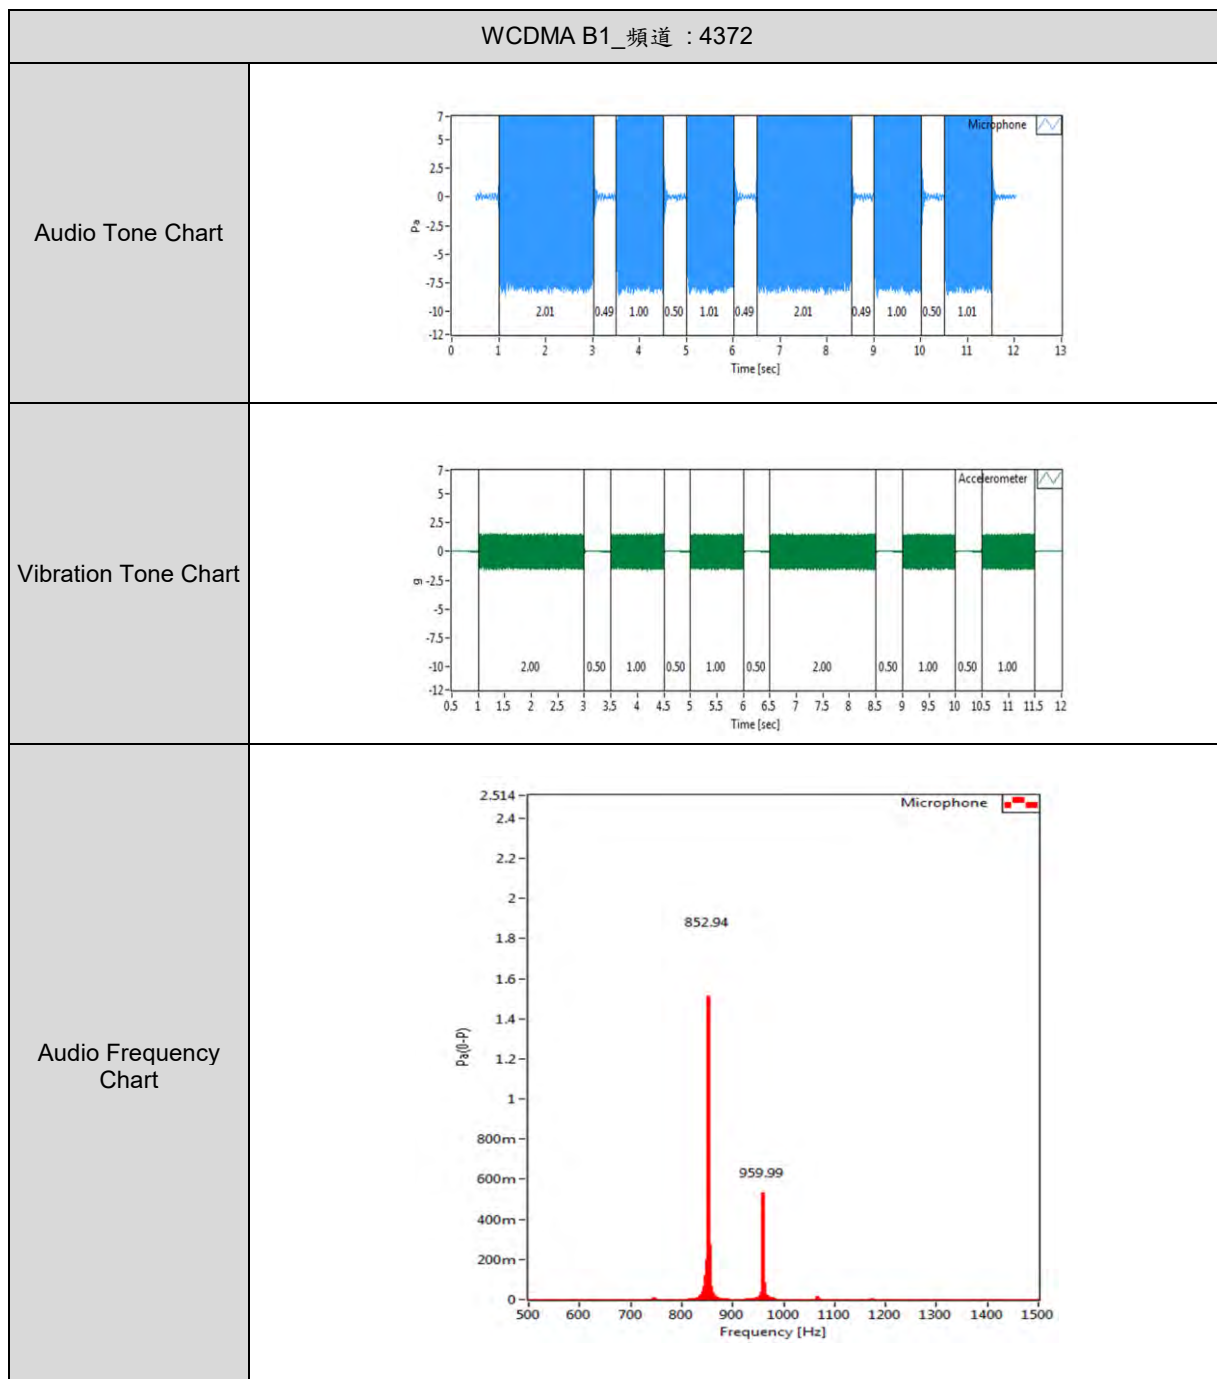


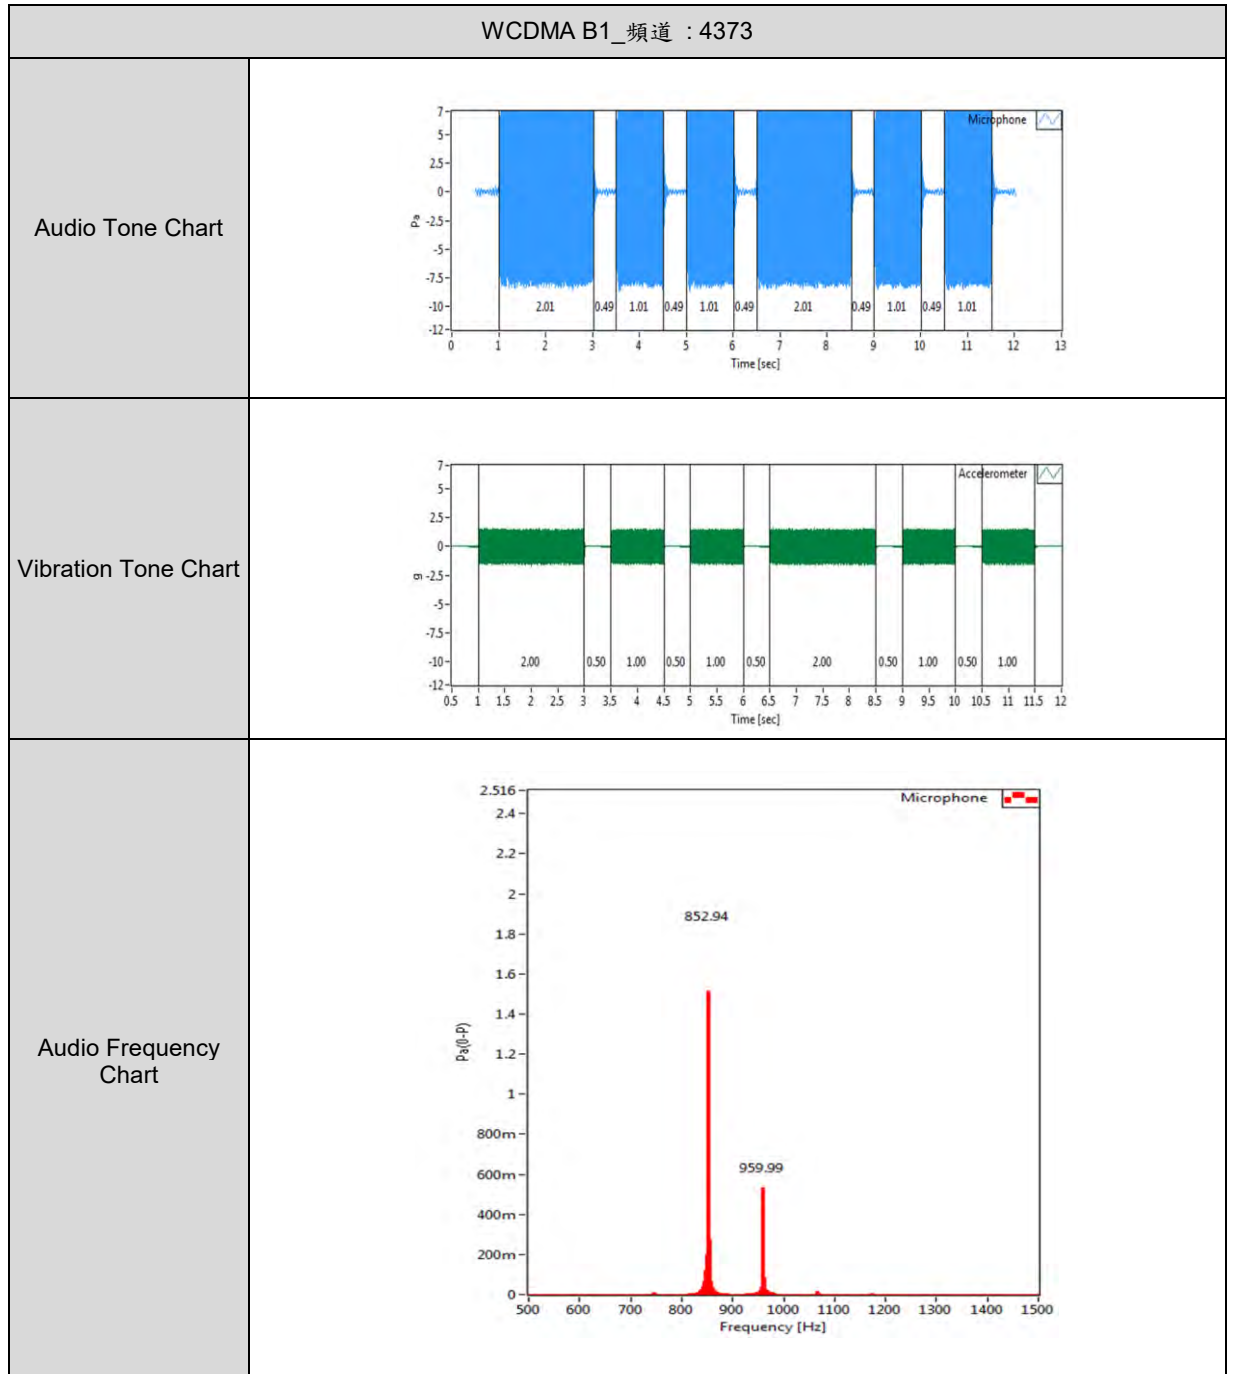


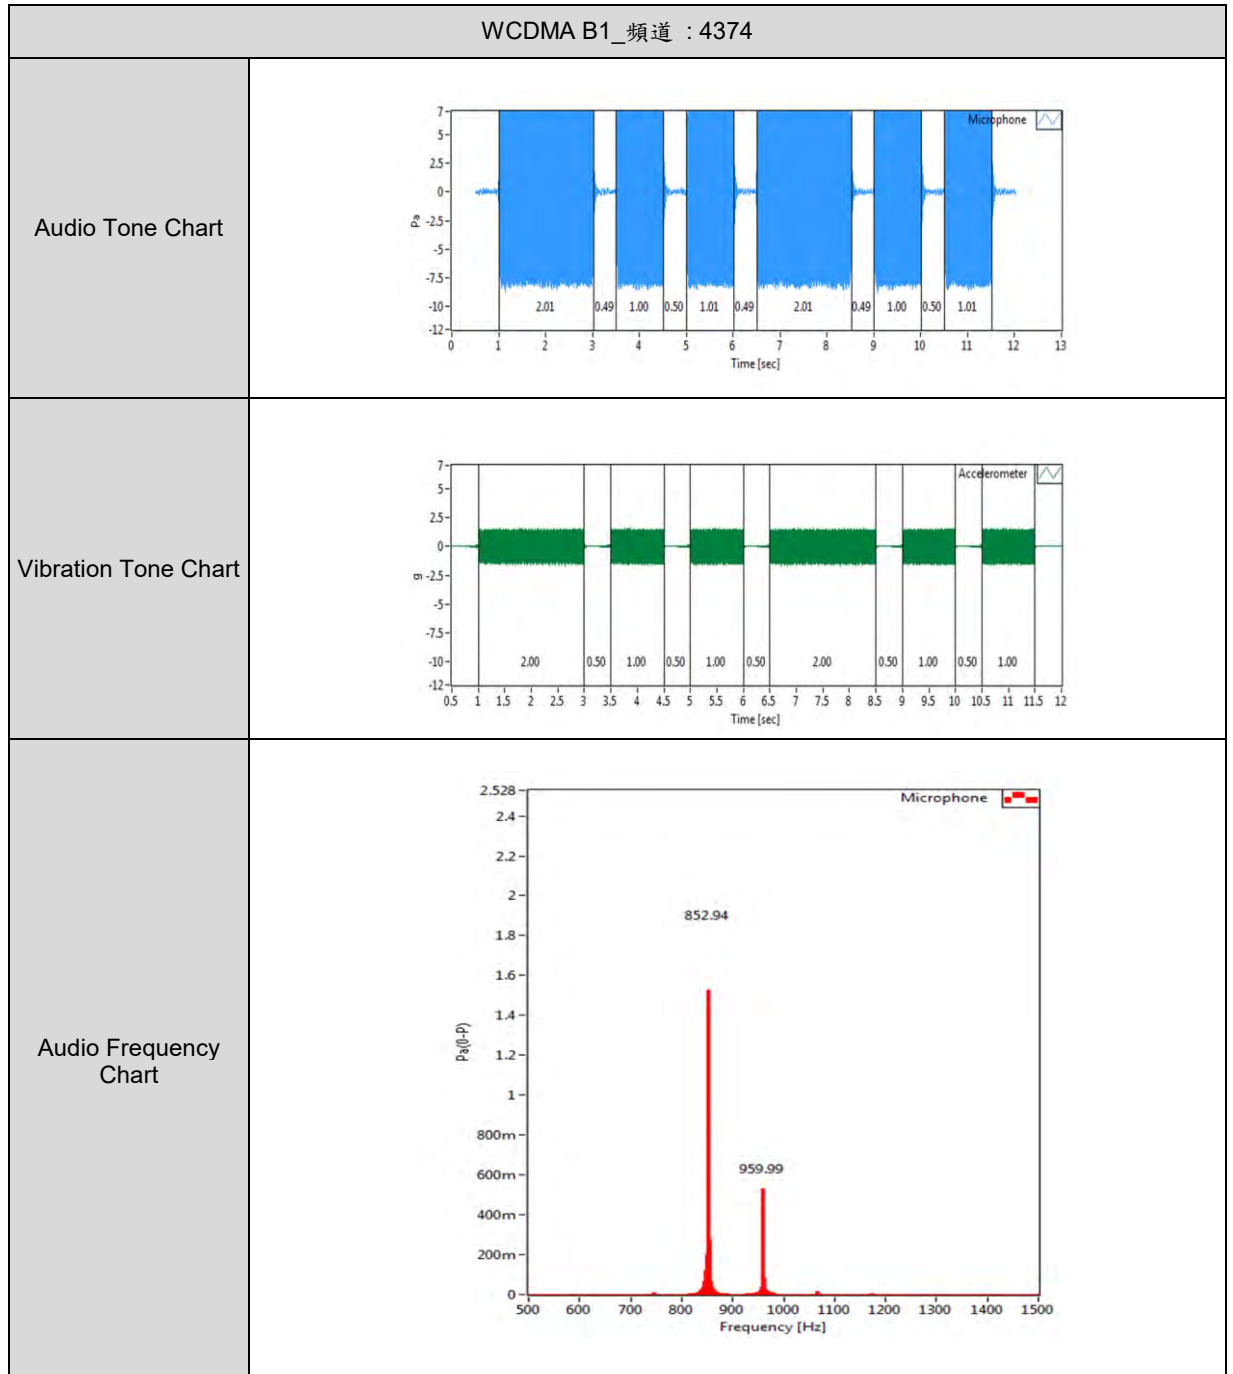


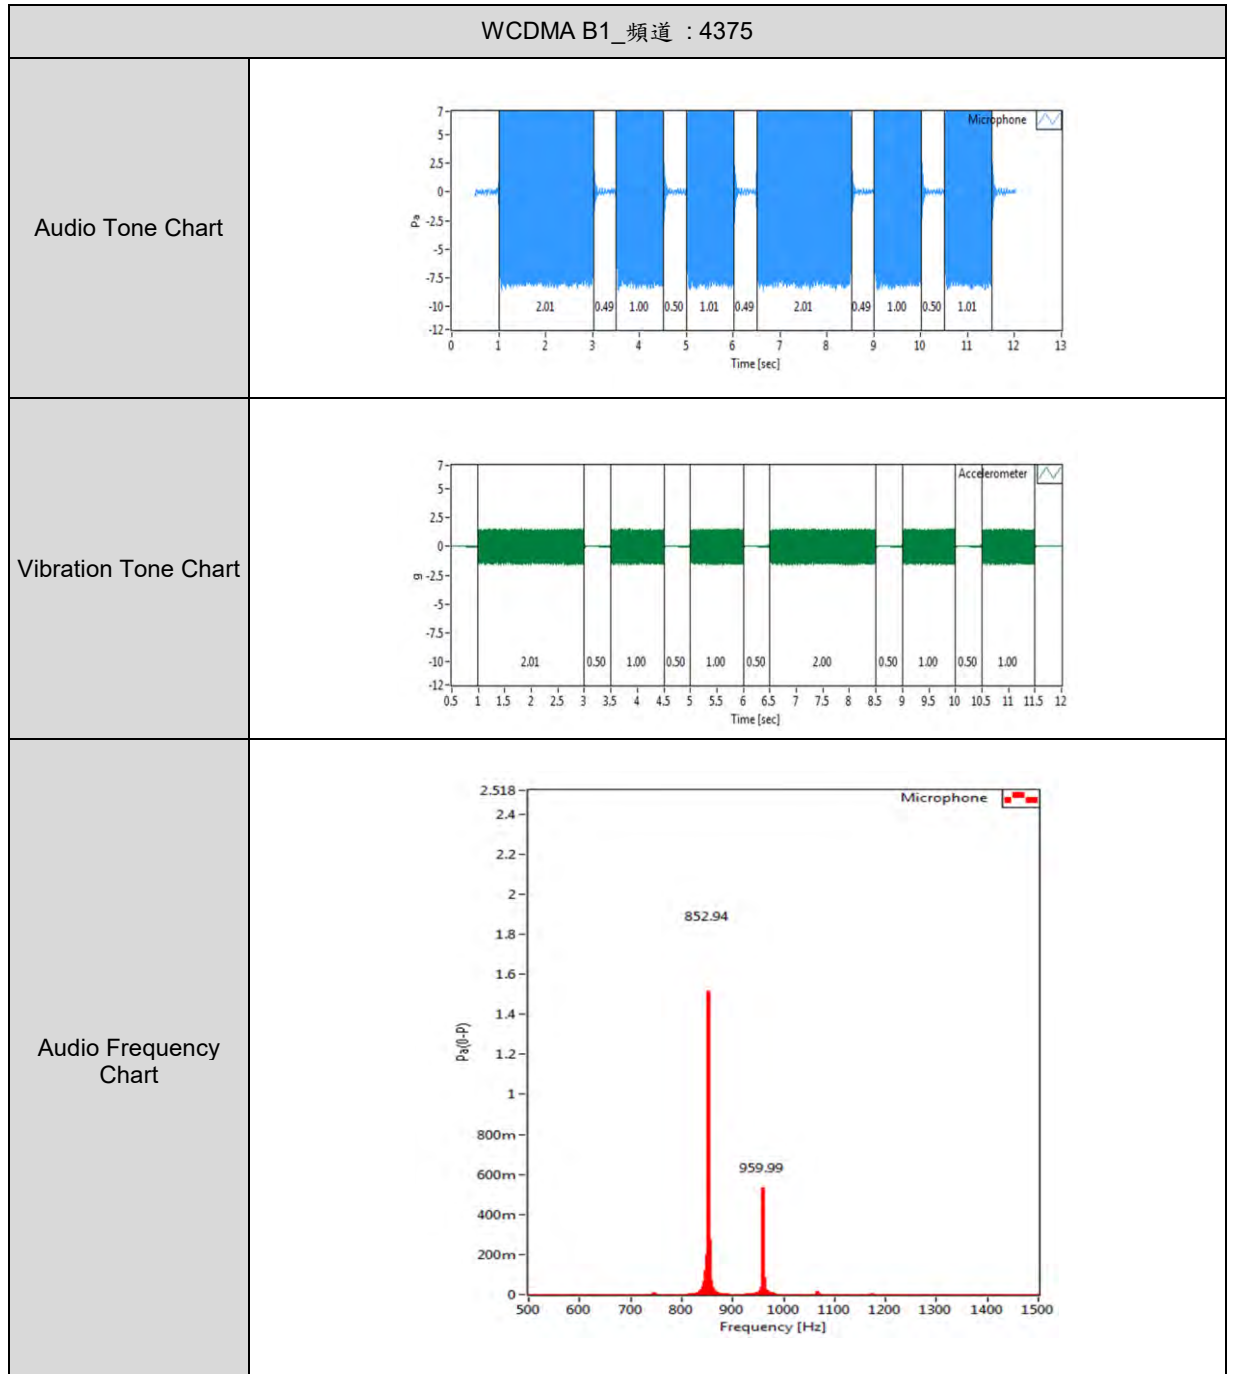


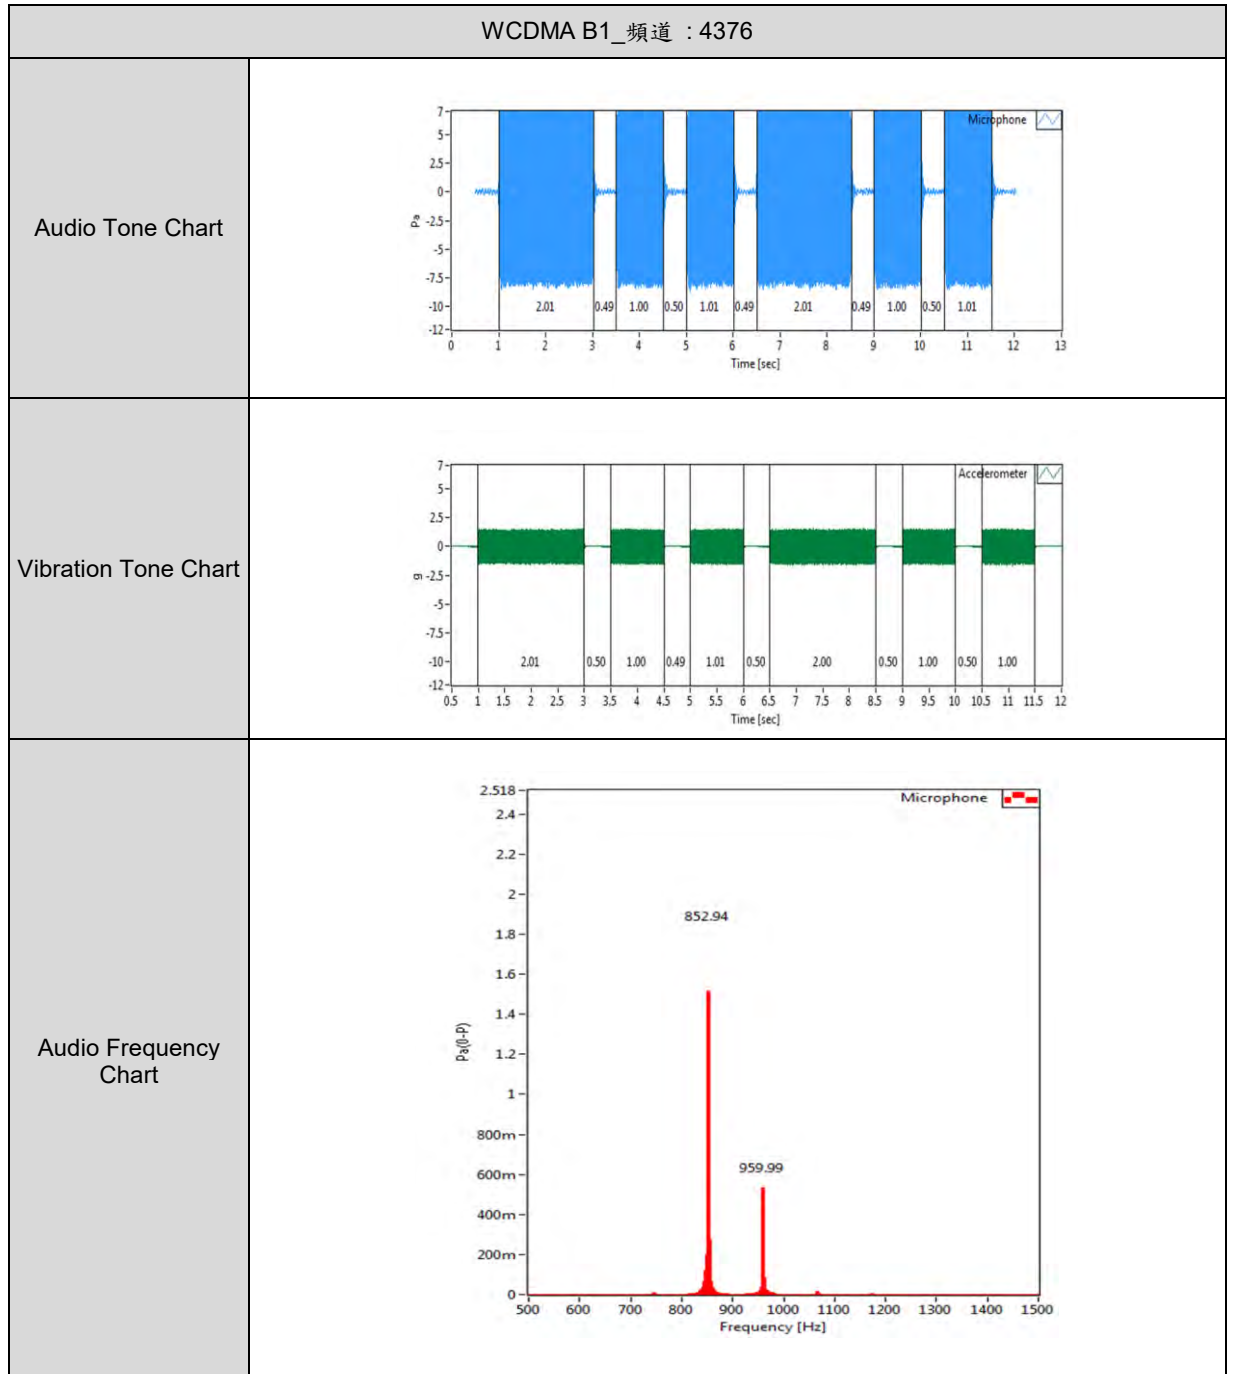


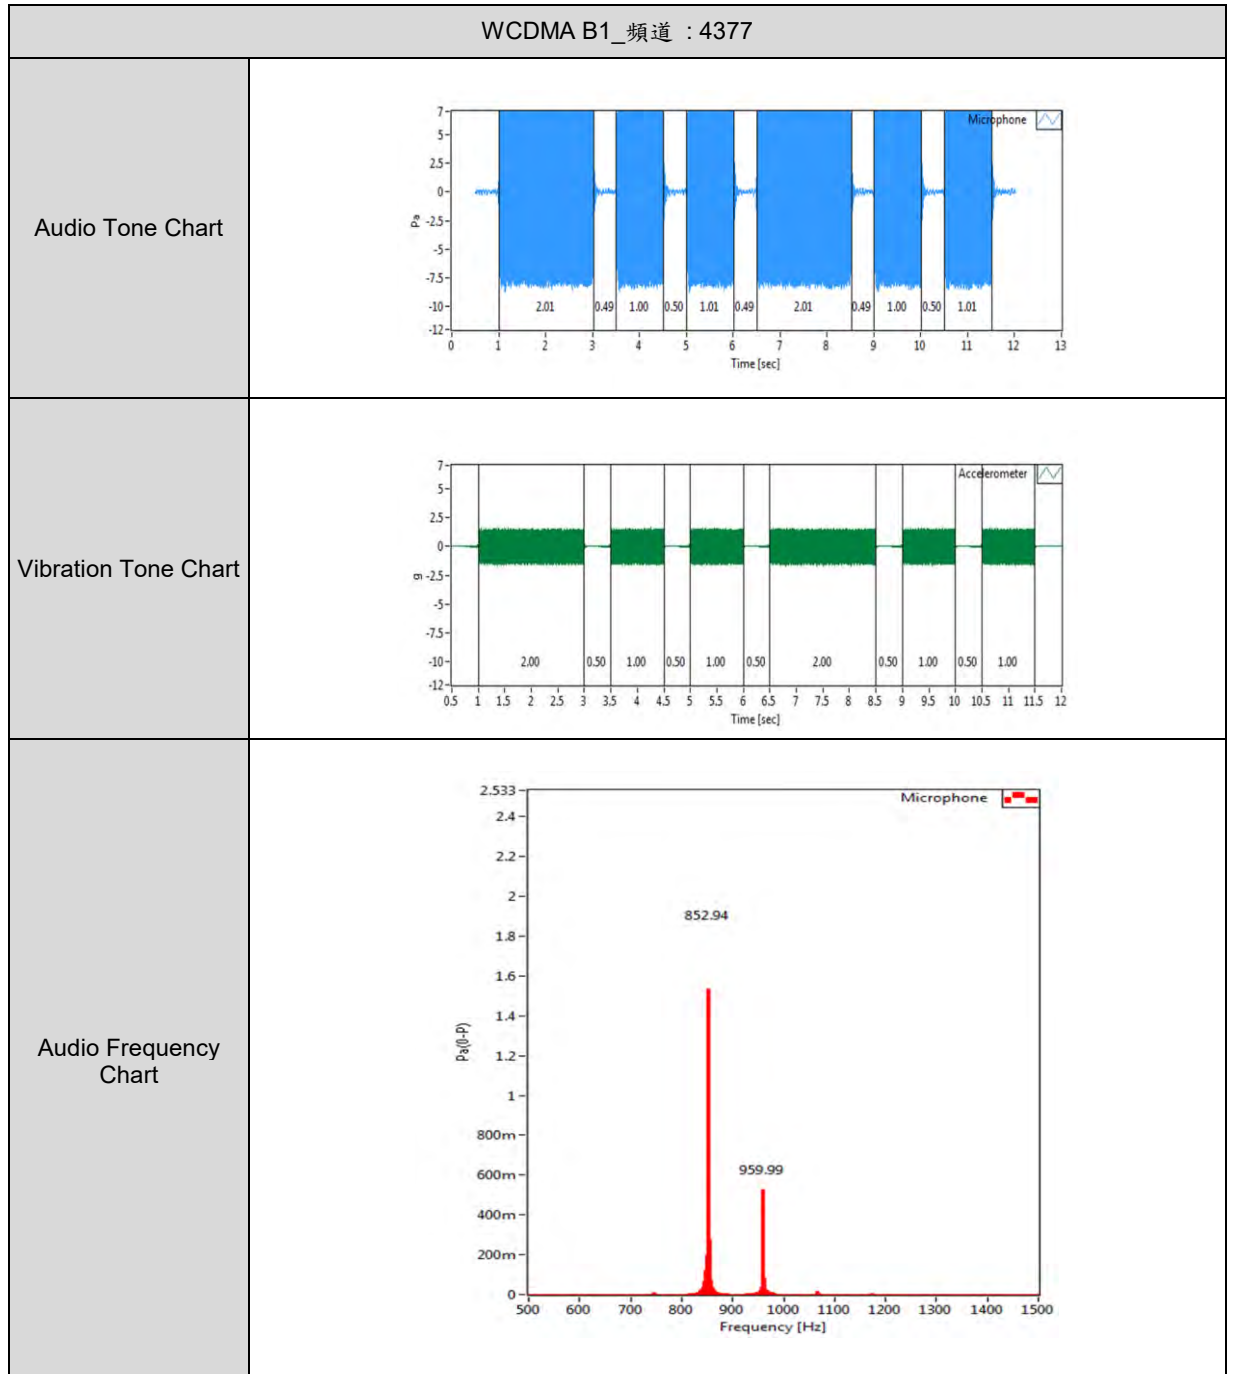


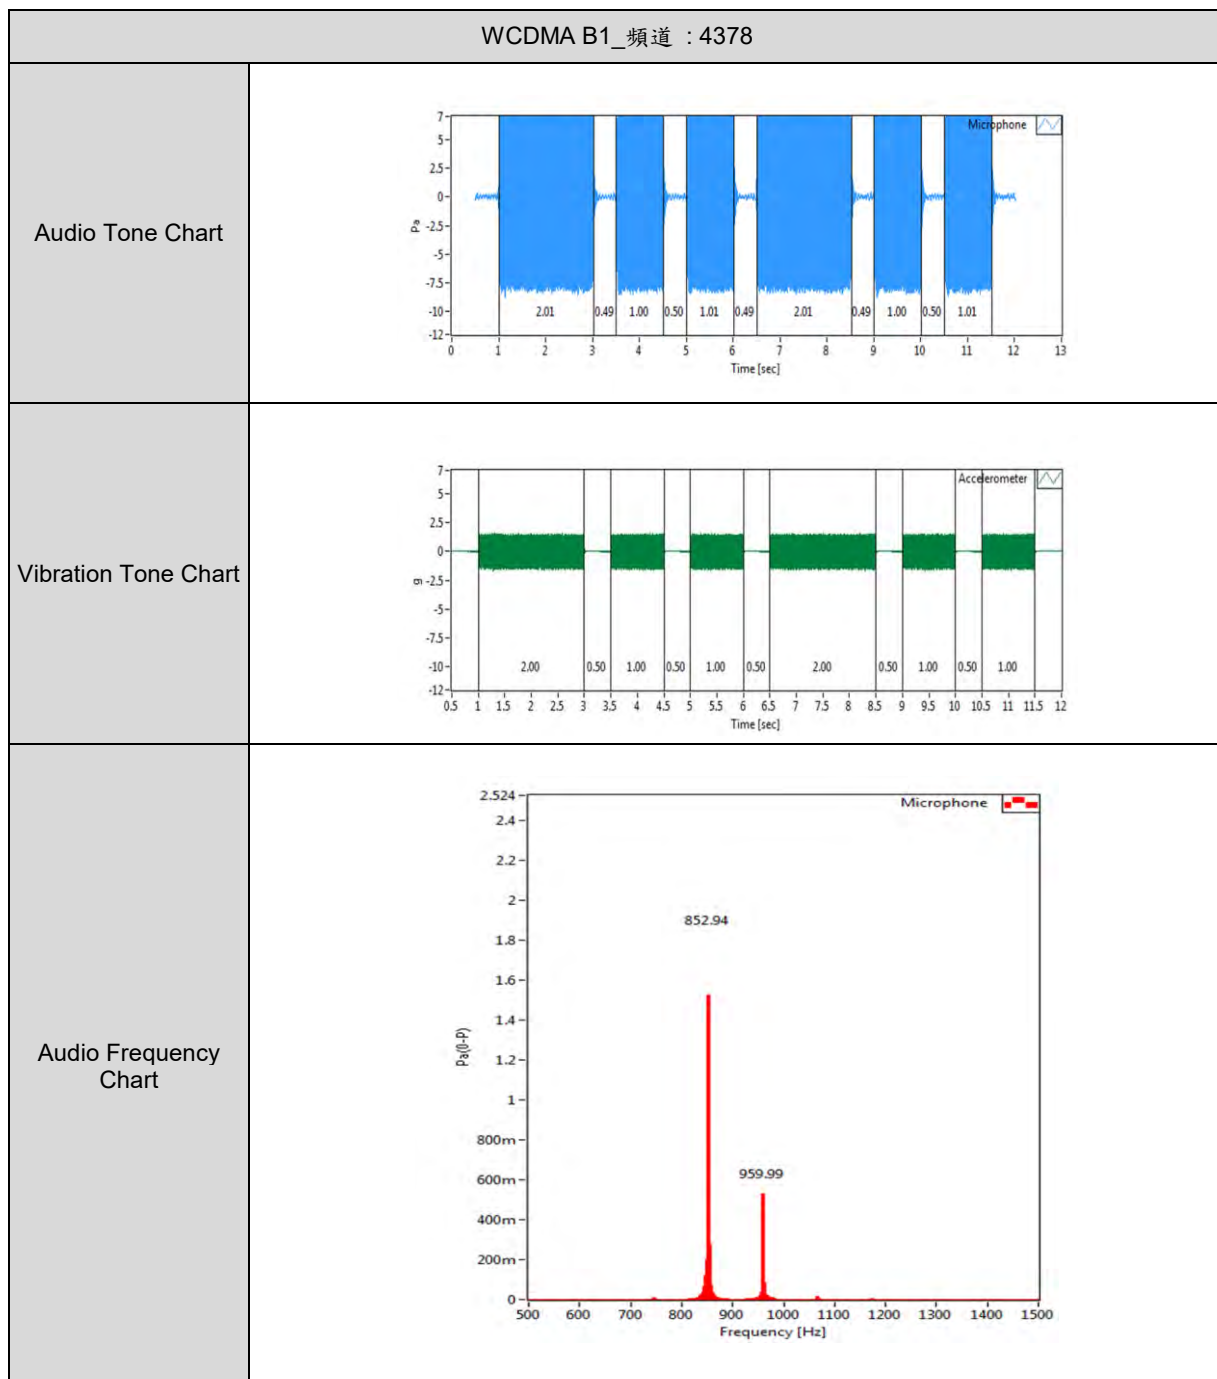


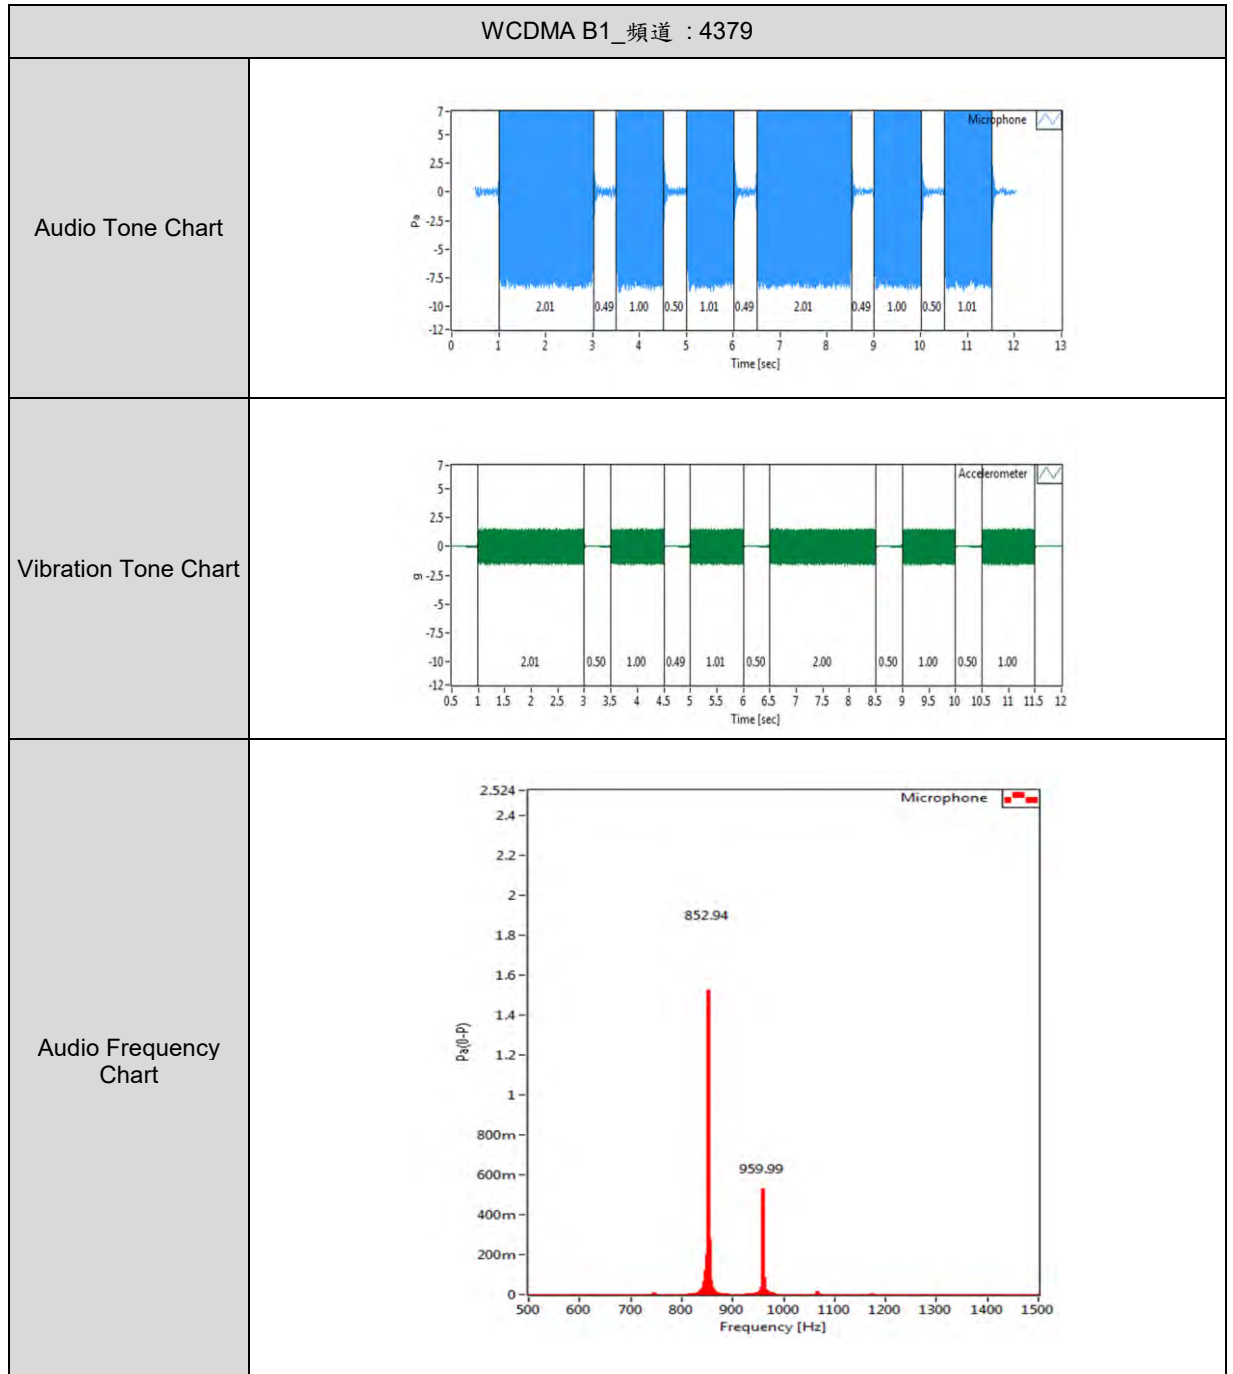


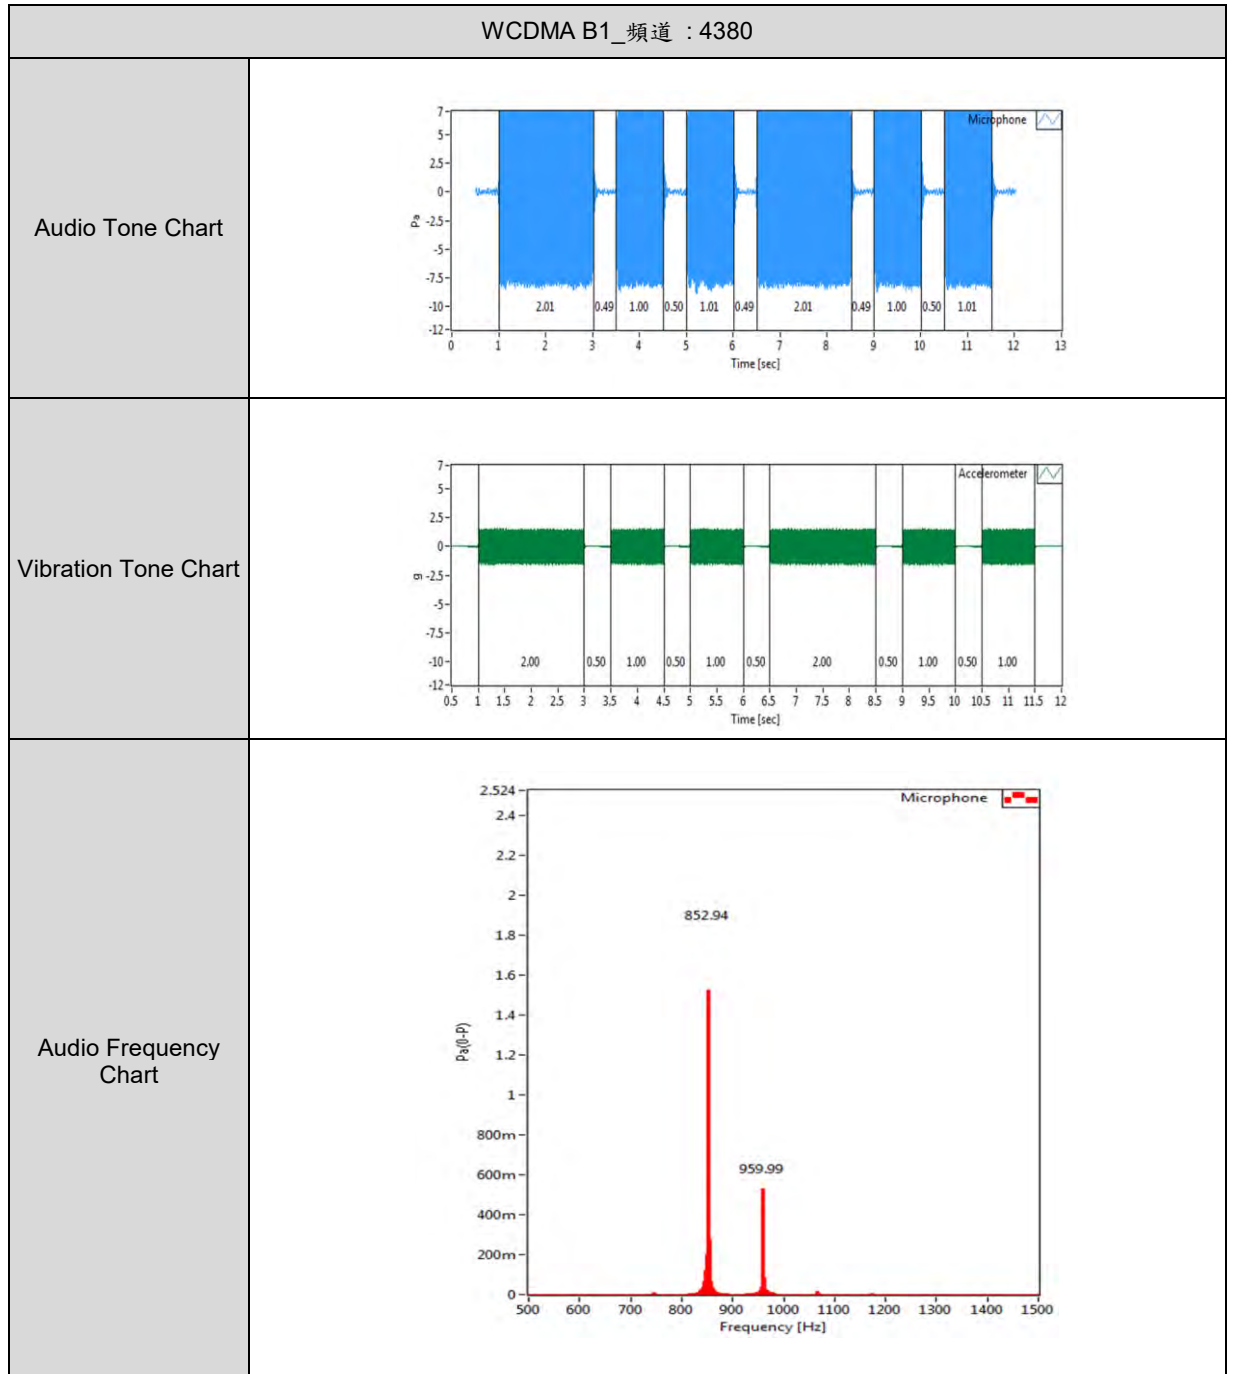


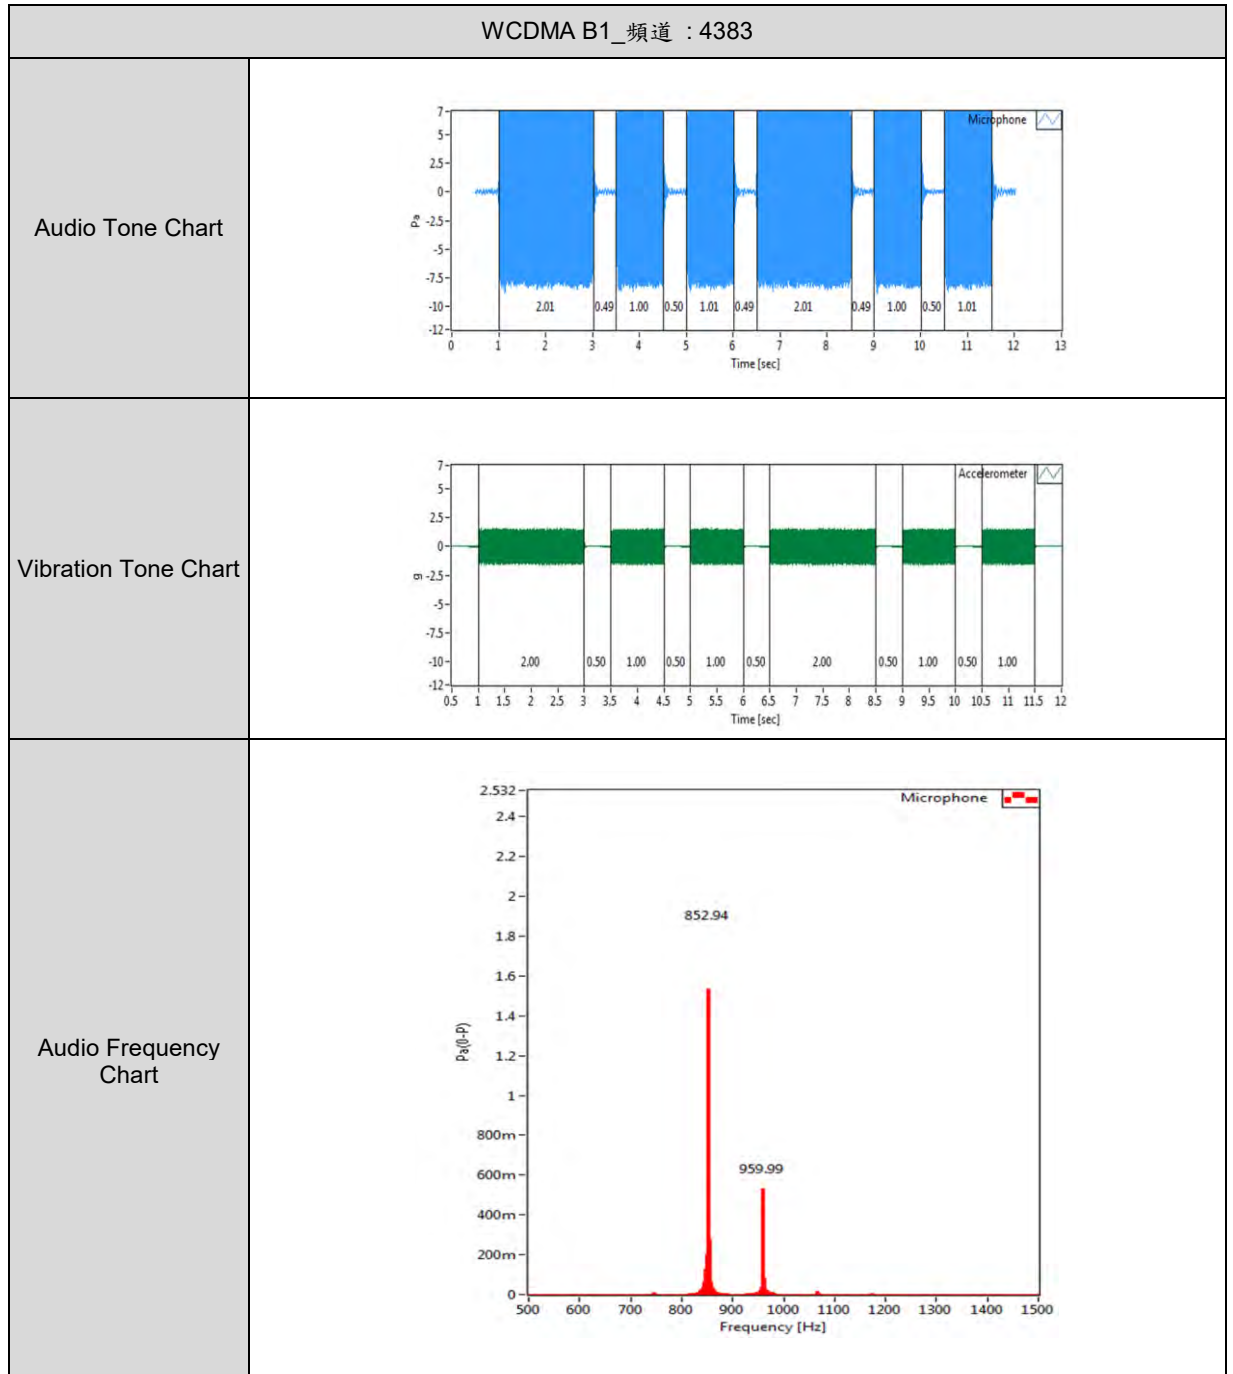


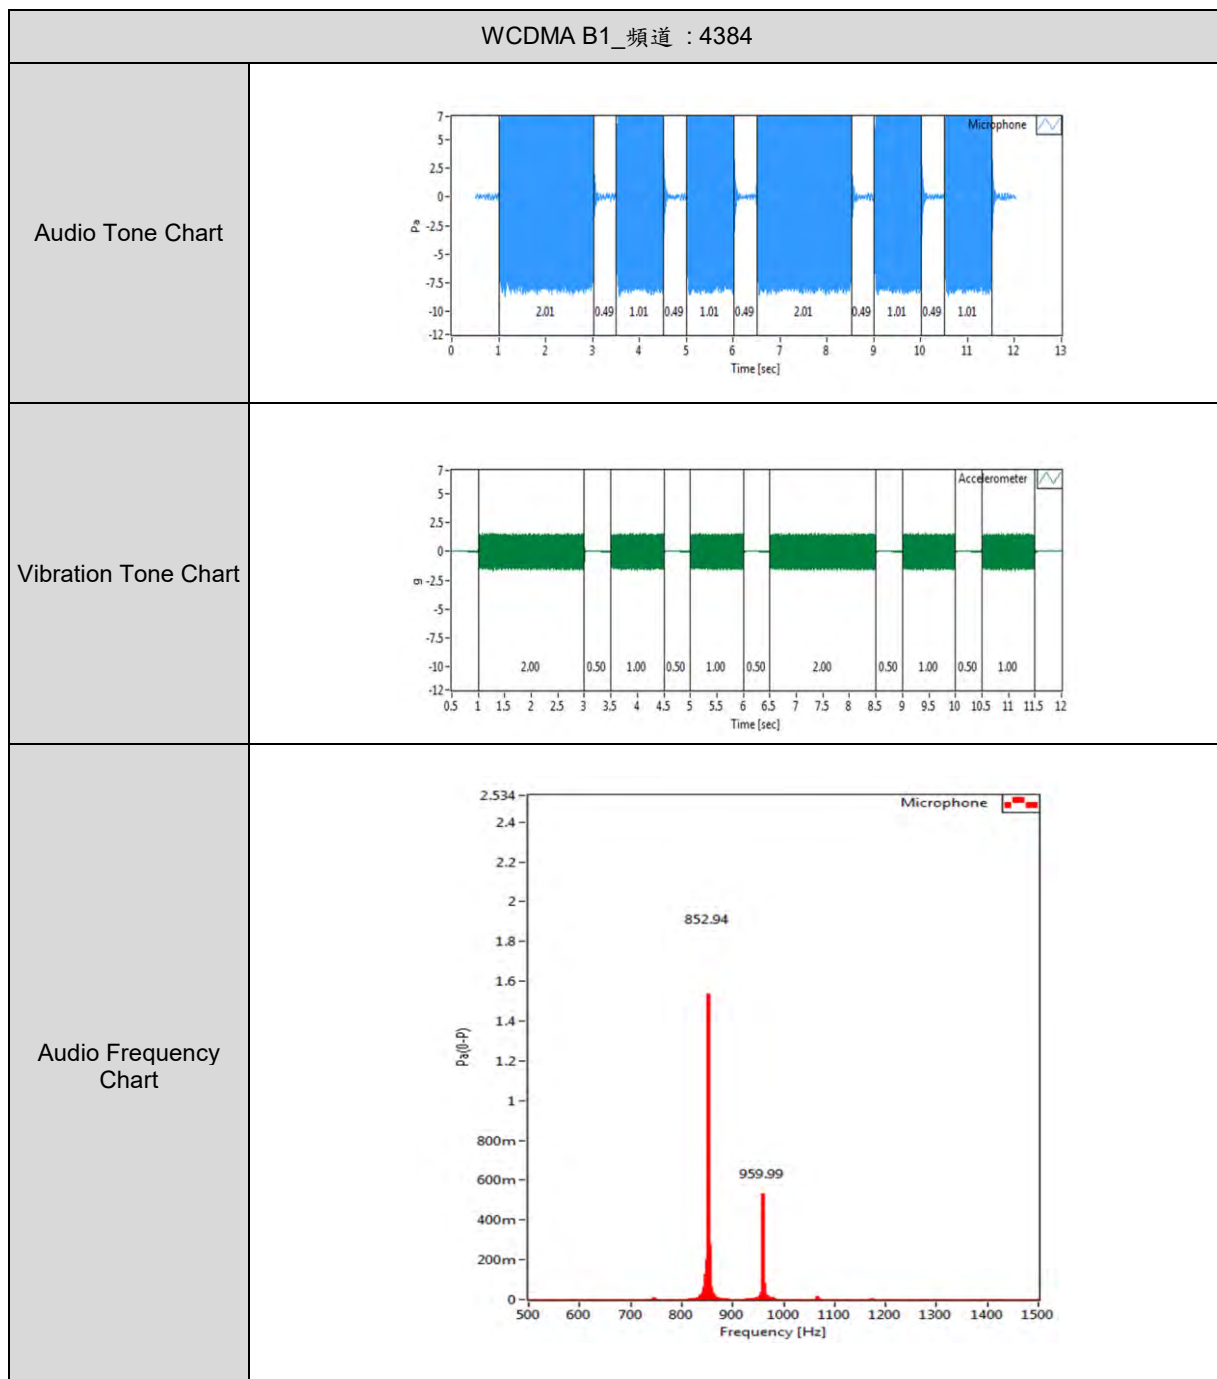


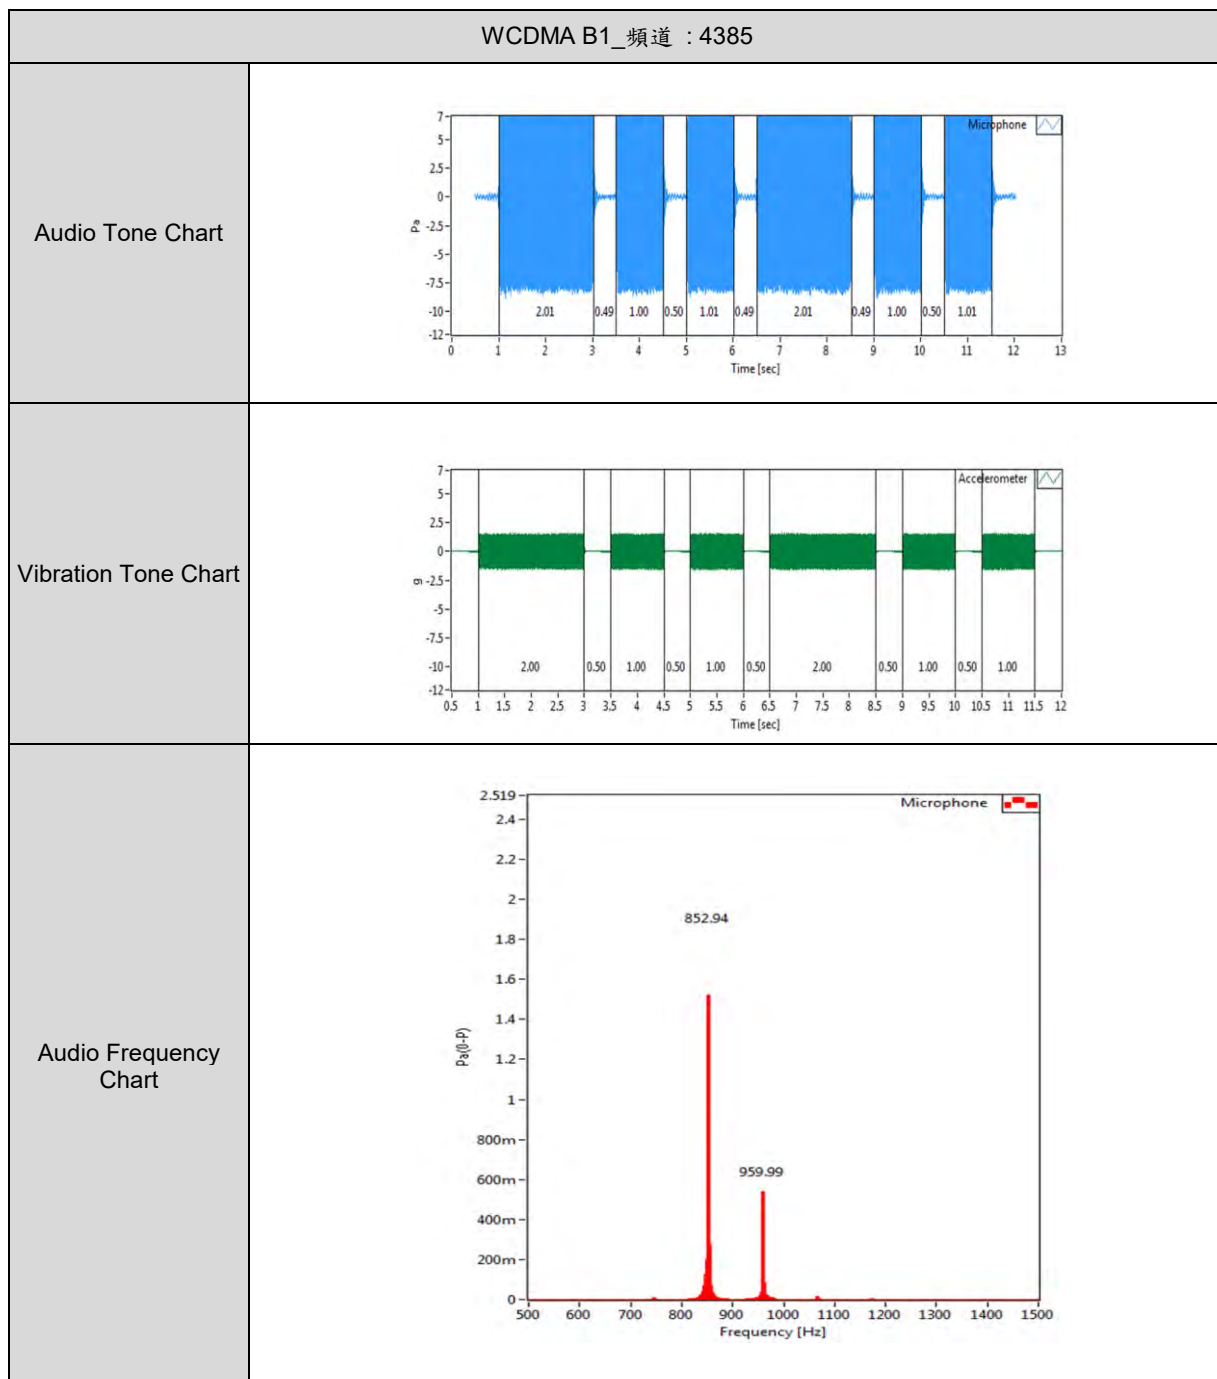


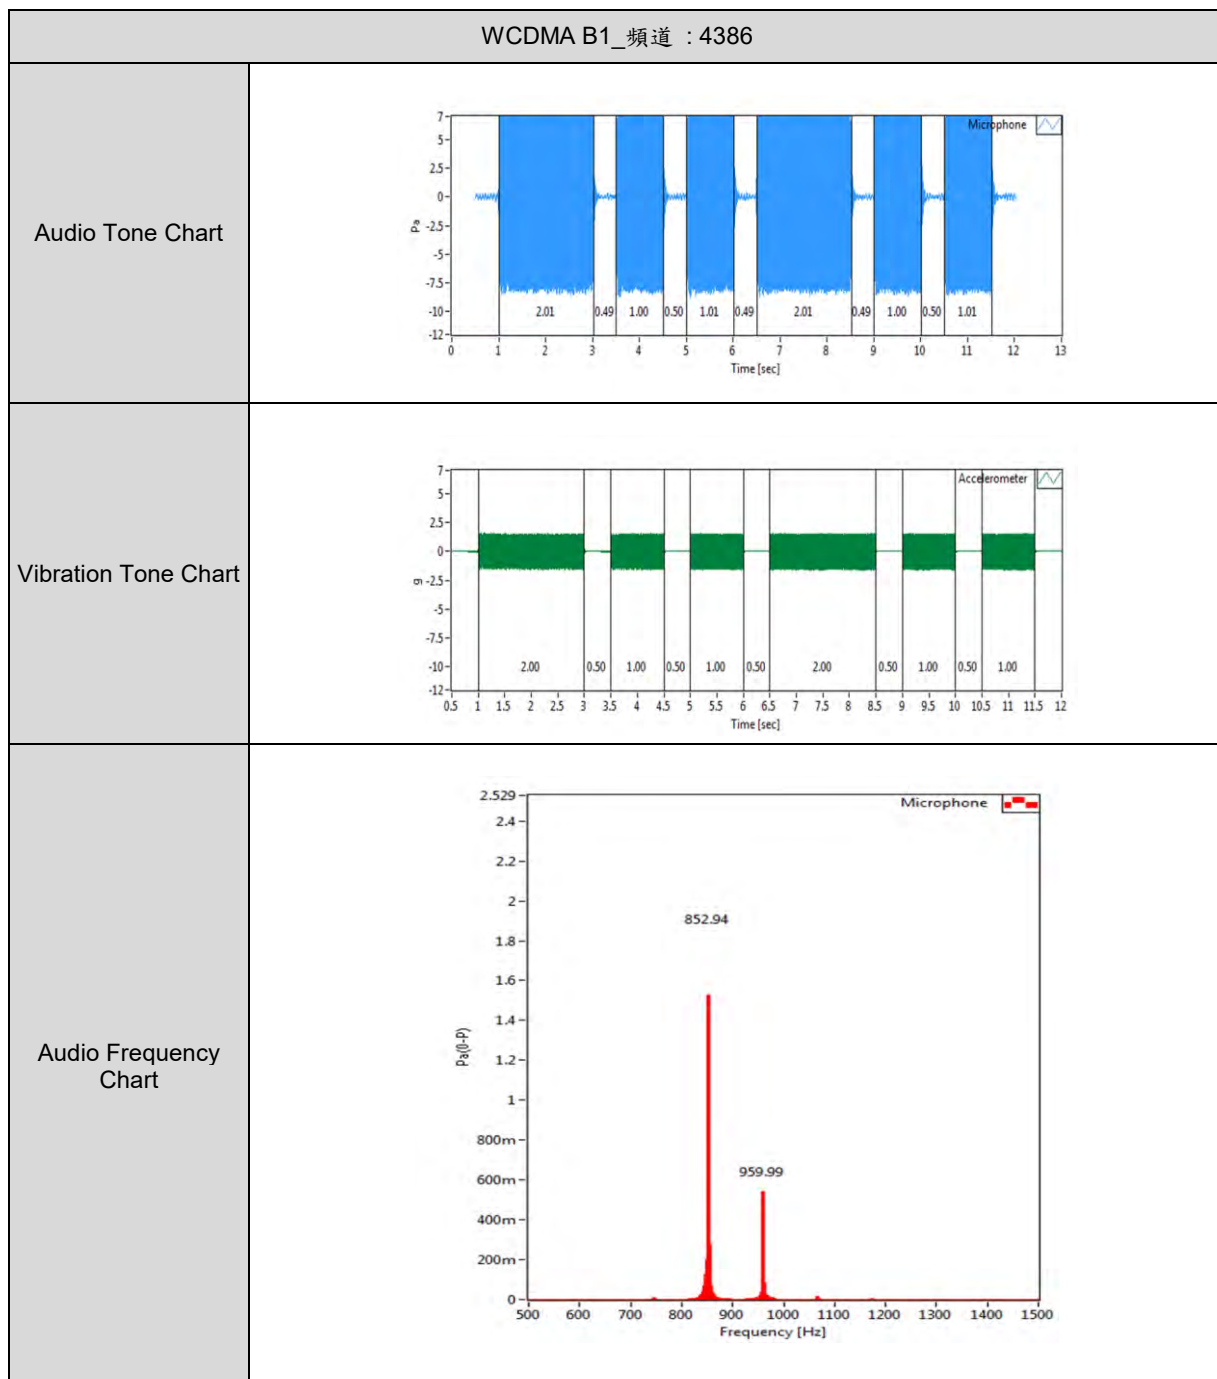


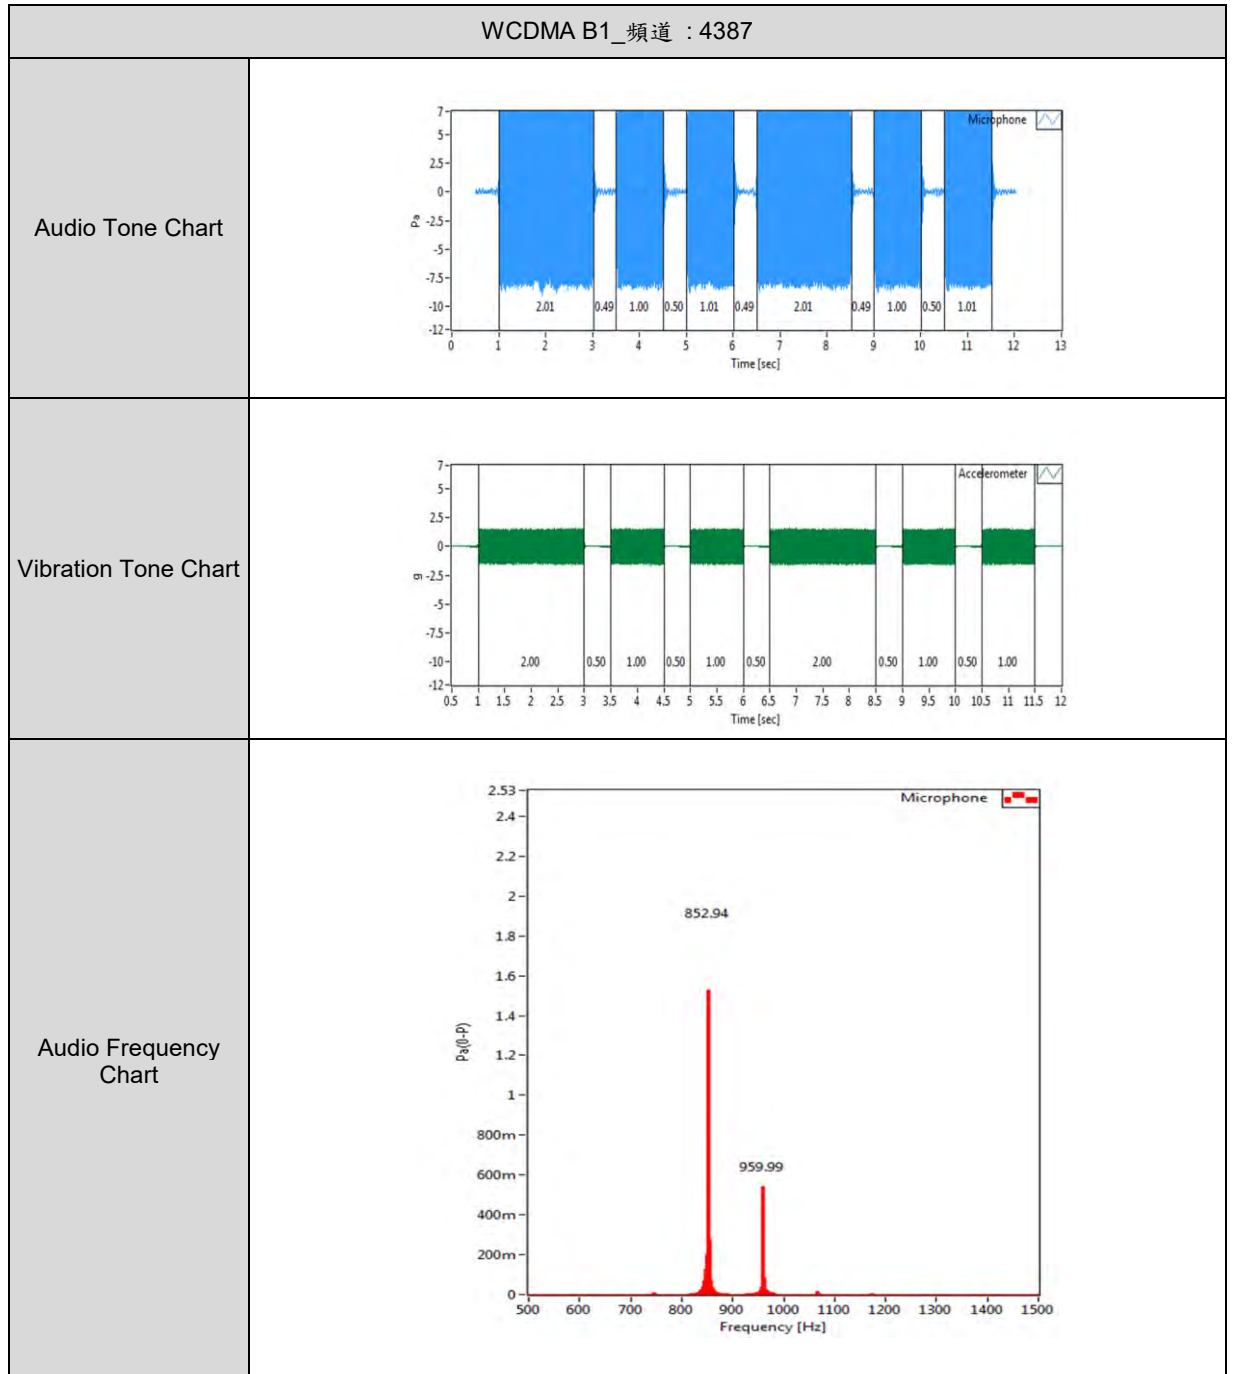


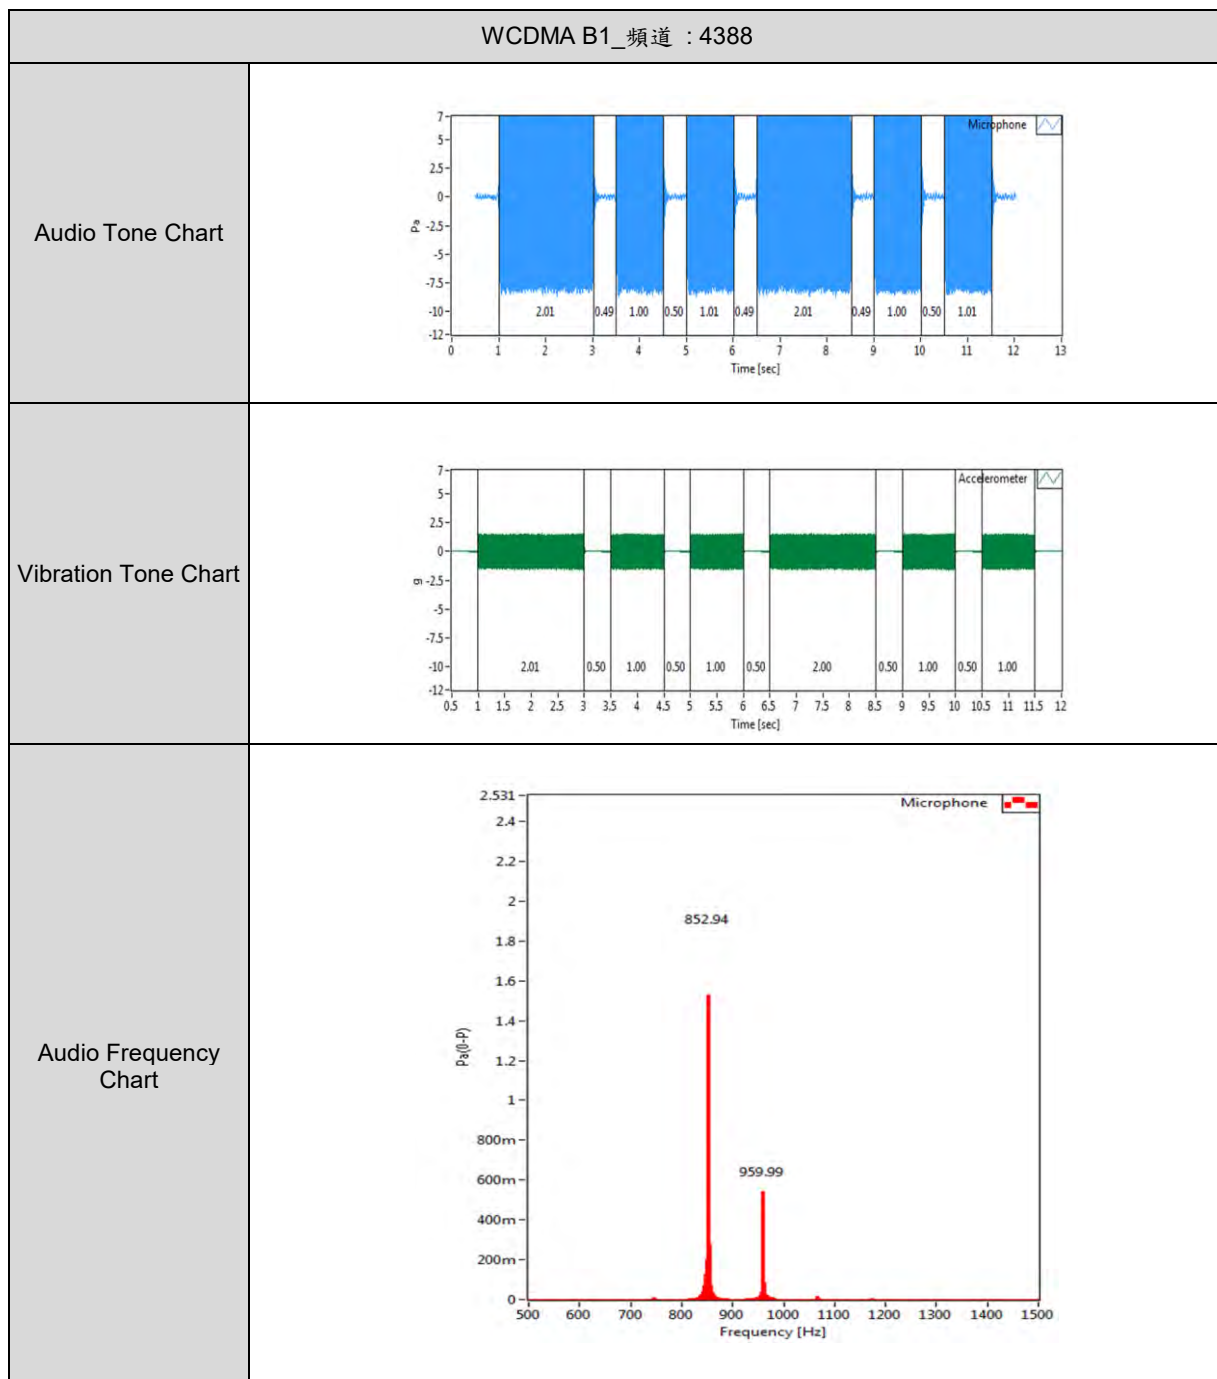


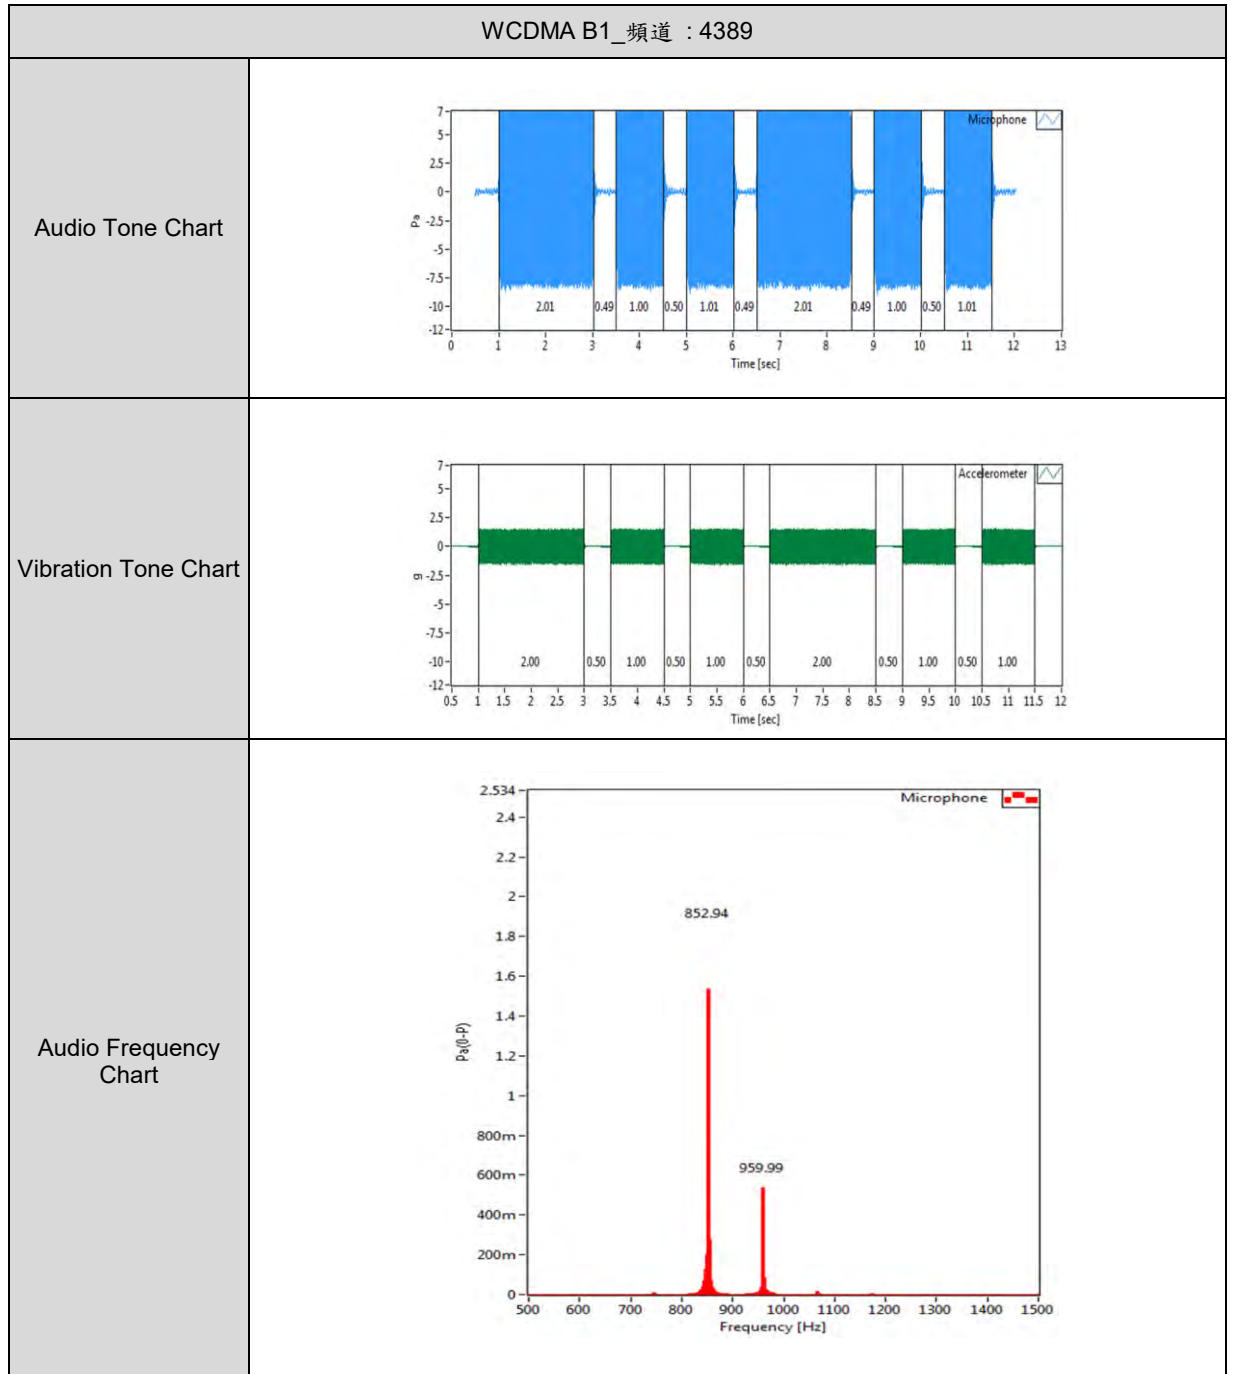

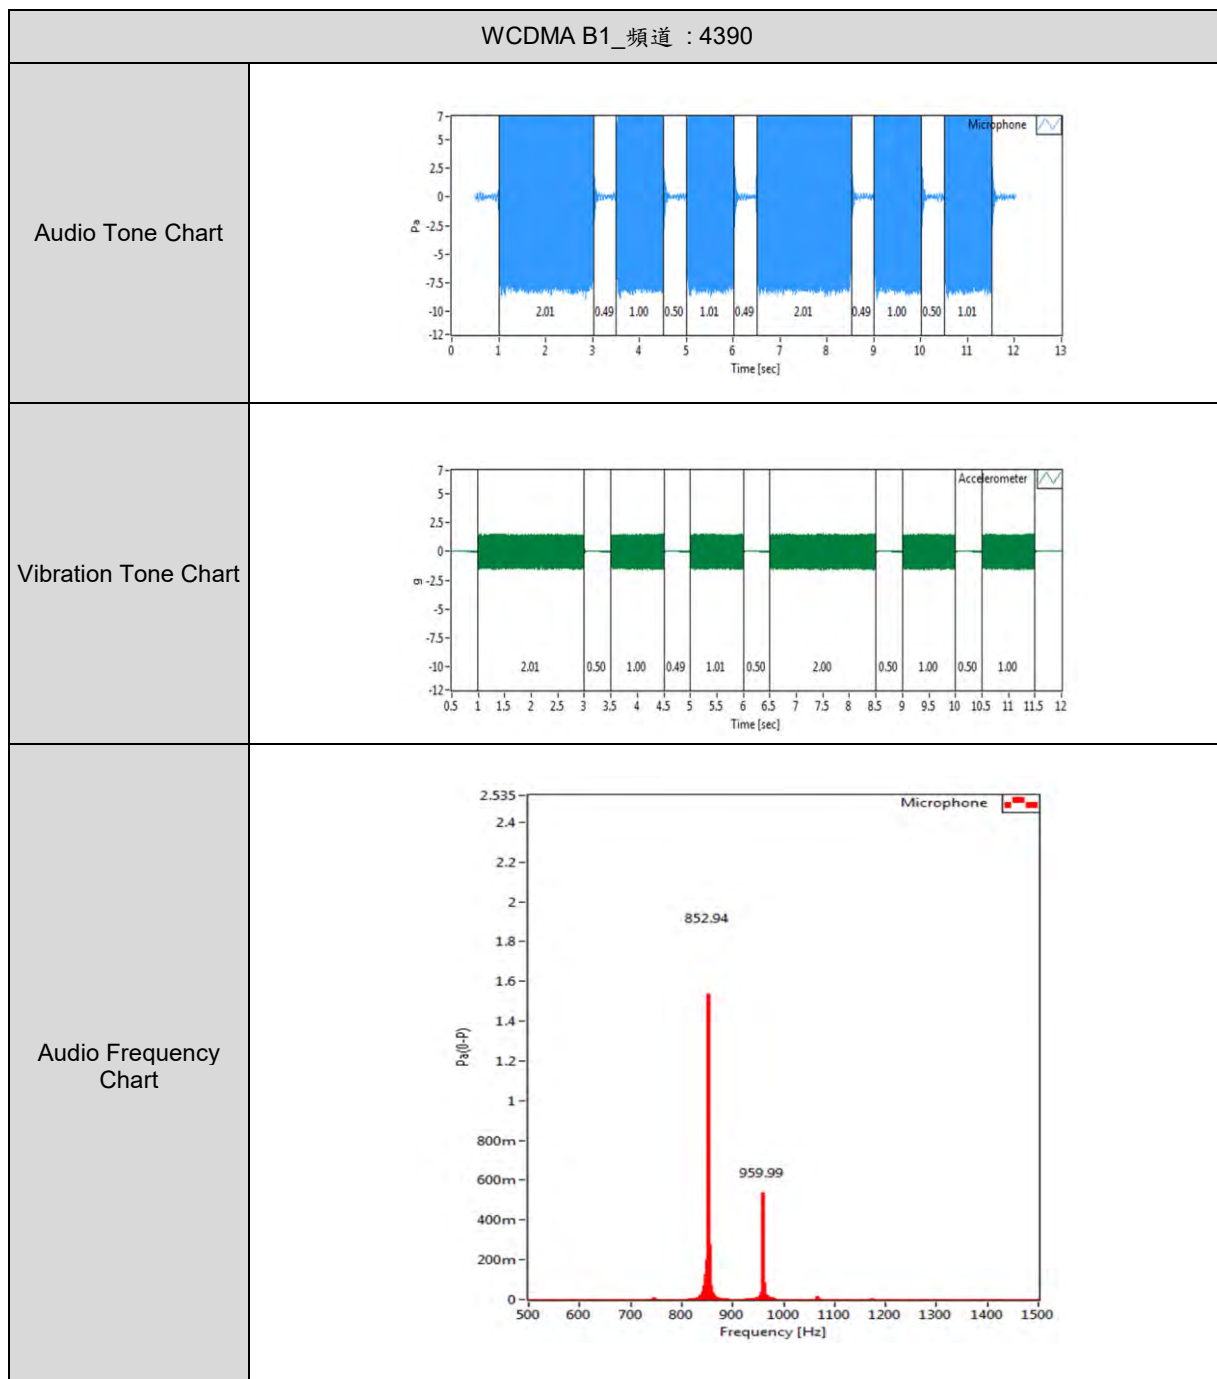

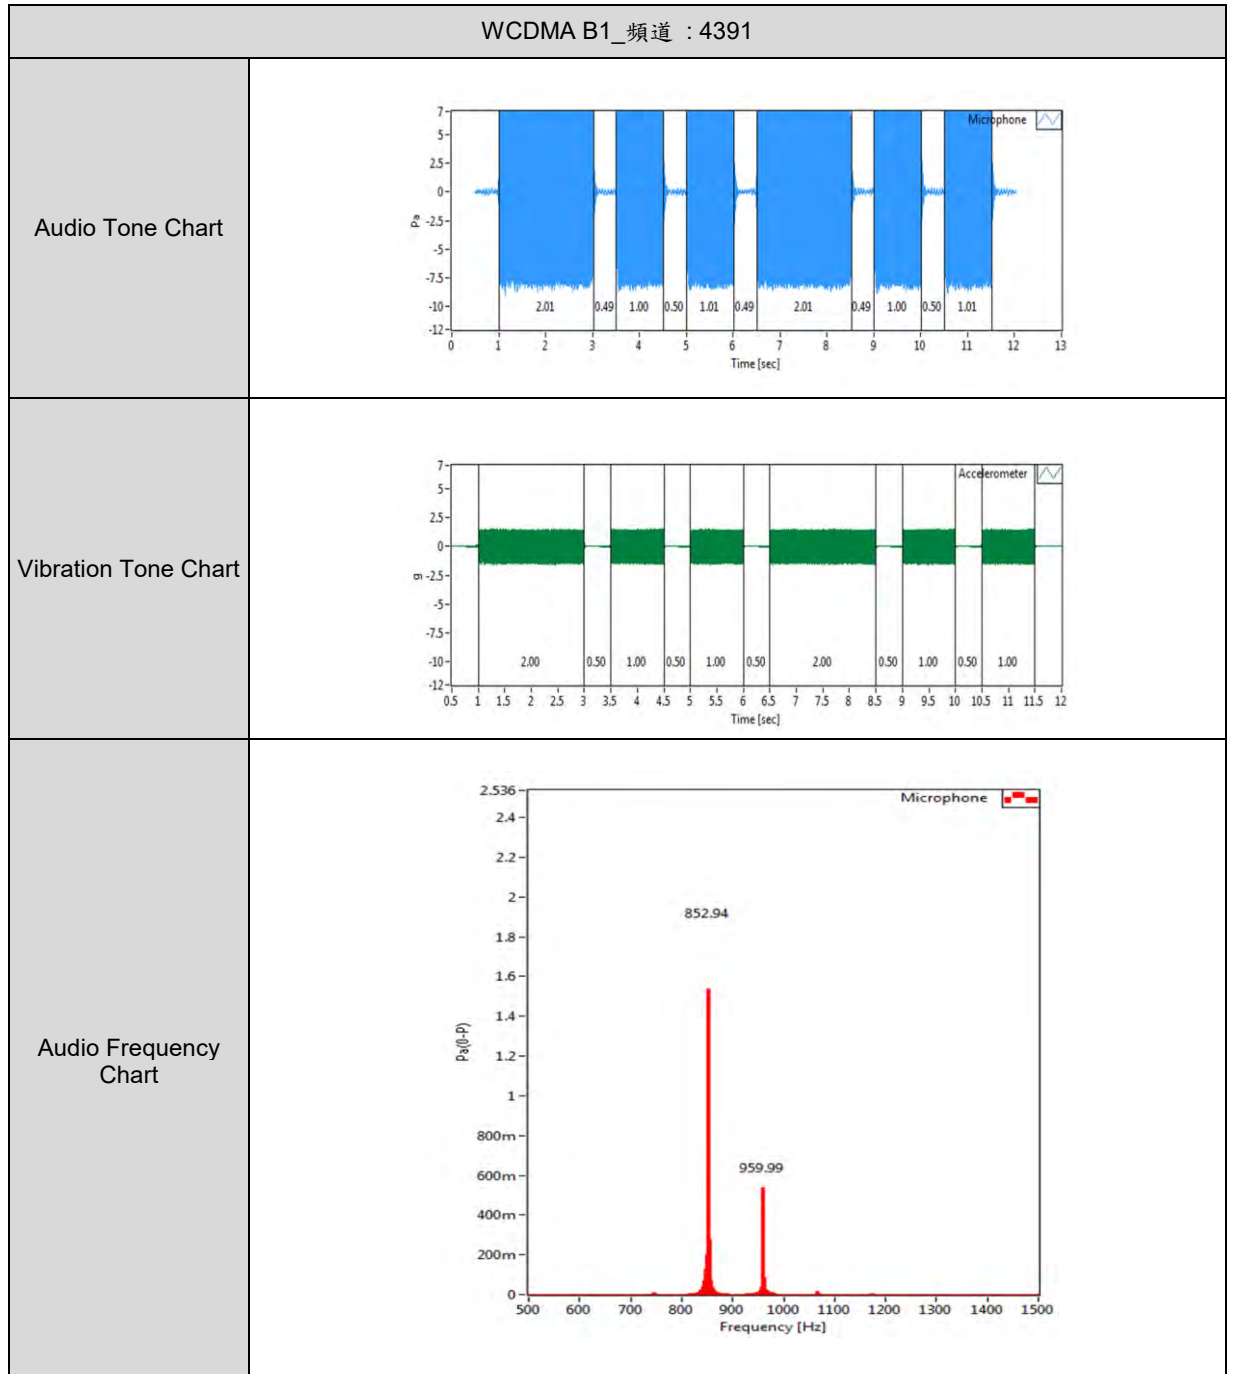

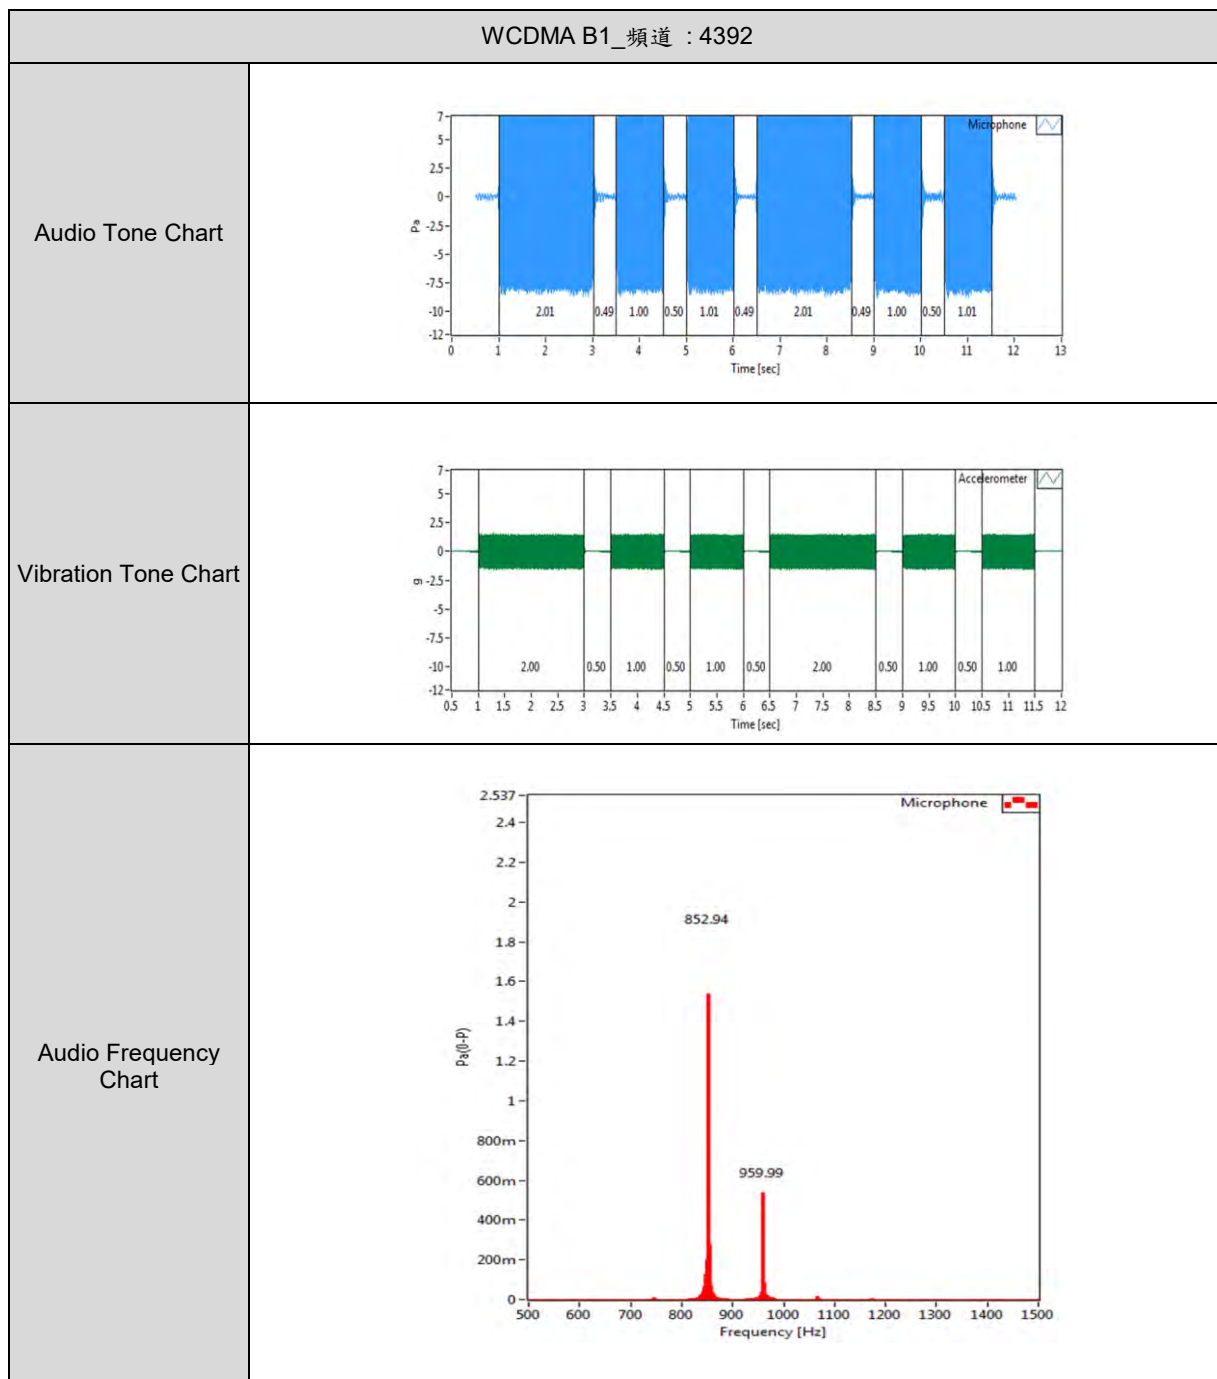

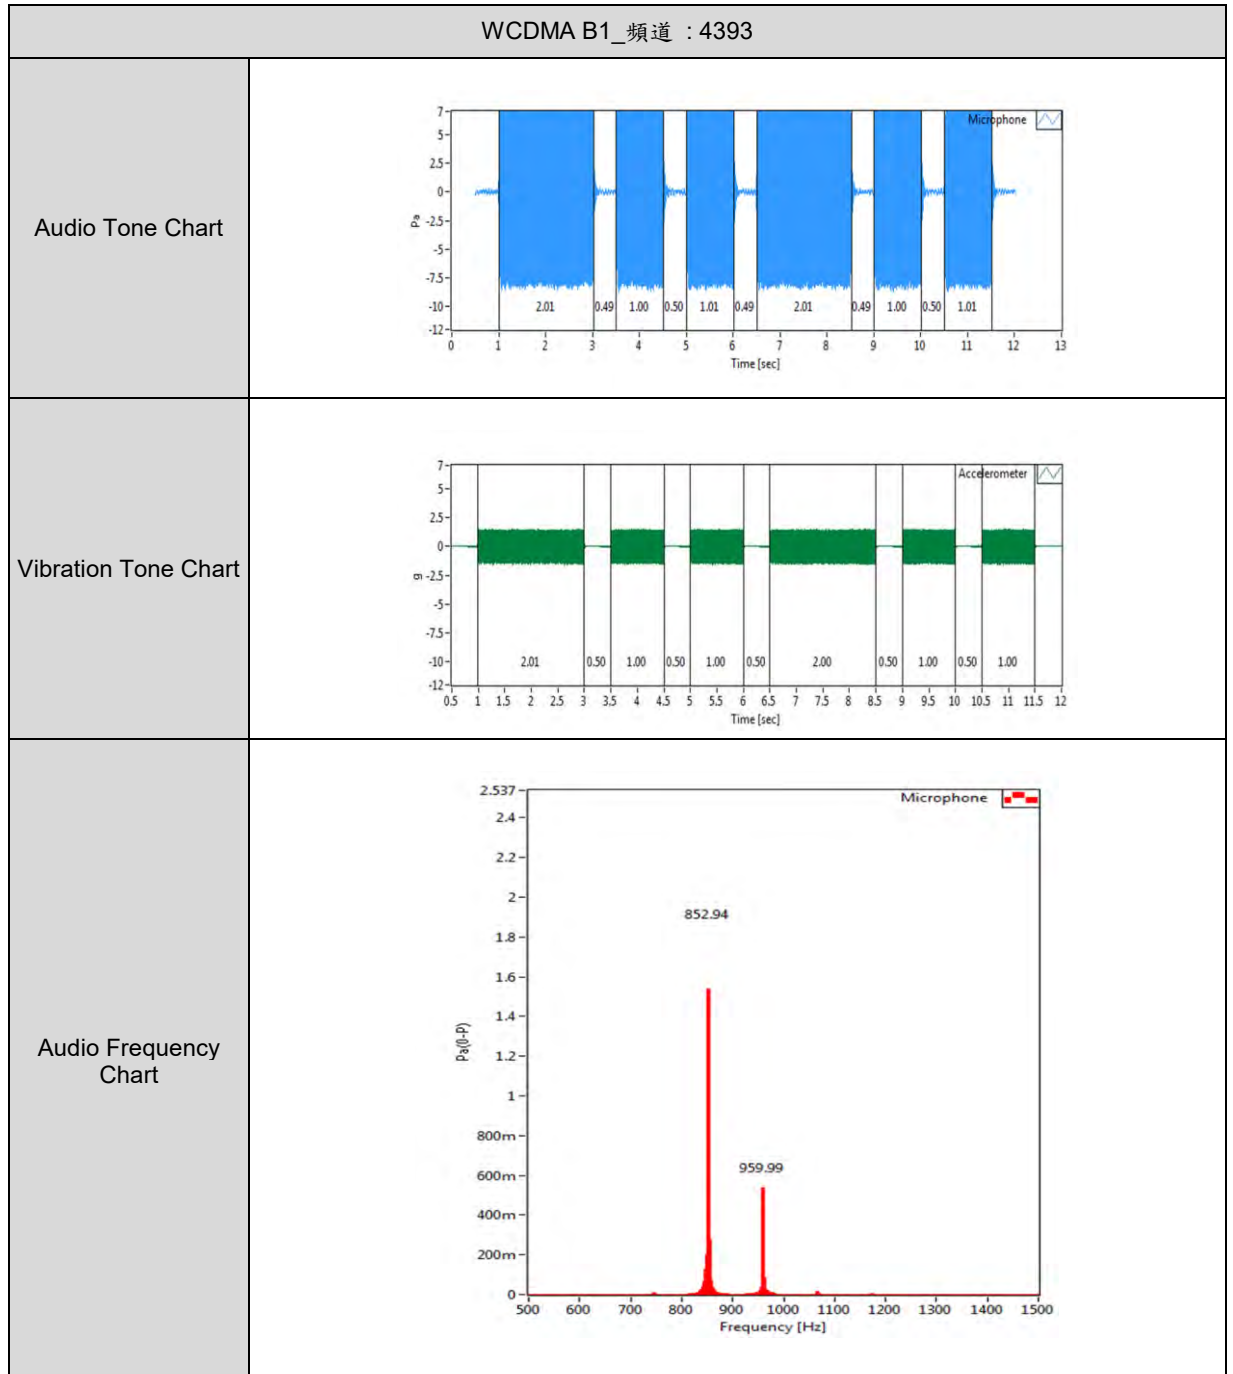

災防告警細胞廣播訊息接收功能之使用者操作畫面	
PWS-1	

---END---