


Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz with OAW-AP1322	

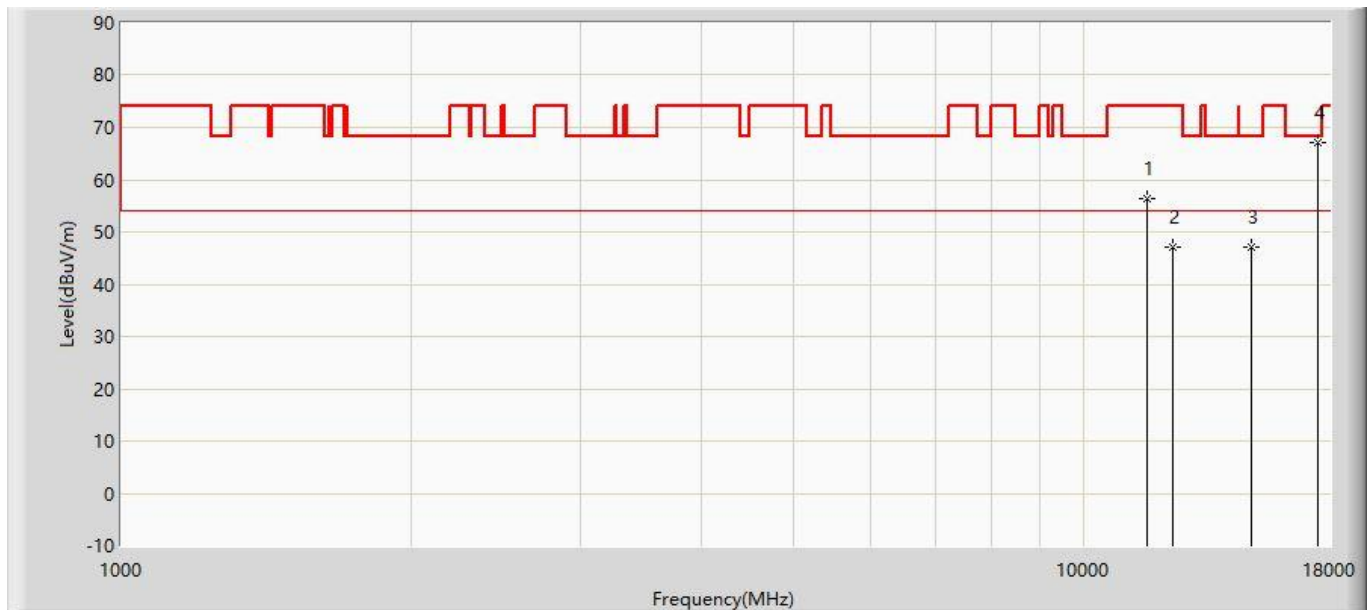


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11642.000	56.405	38.420	-17.595	74.000	17.985	PK
2			12381.500	47.126	29.317	-26.874	74.000	17.808	PK
3			14906.000	47.210	26.445	-20.990	68.200	20.765	PK
4		*	17473.000	67.014	37.029	-1.186	68.200	29.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz with OAW-AP1322	

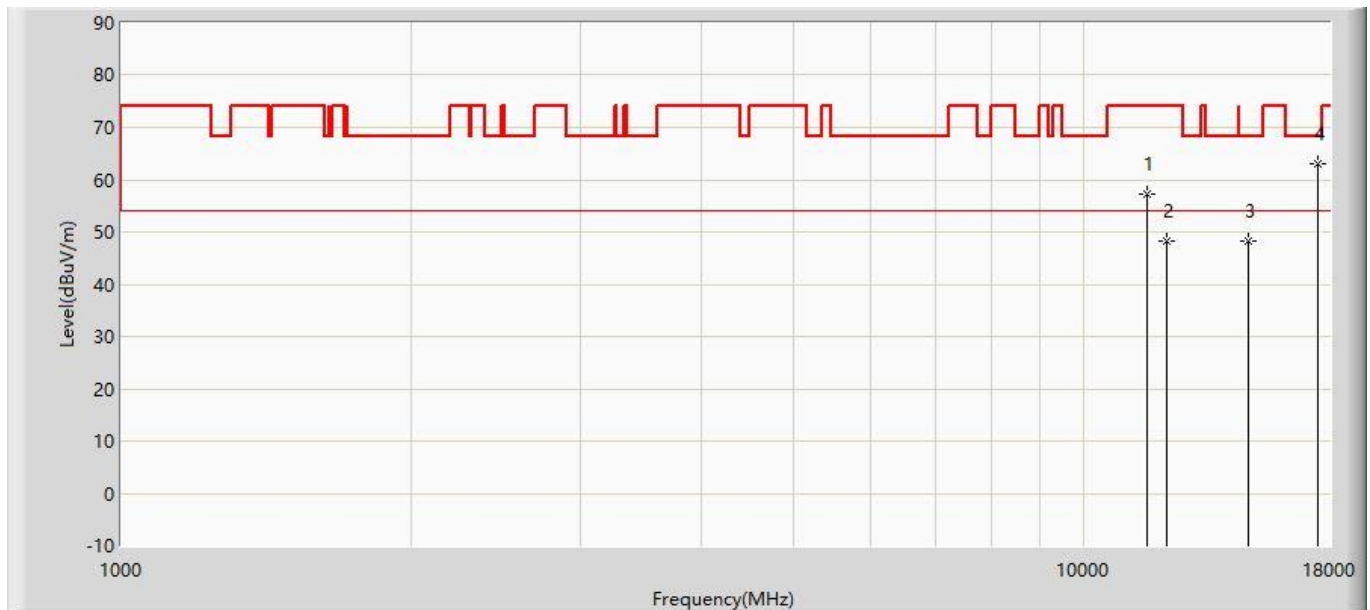


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11642.000	57.178	39.193	-16.822	74.000	17.985	PK
2			12194.500	48.393	30.579	-25.607	74.000	17.814	PK
3			14821.000	48.198	27.456	-20.002	68.200	20.742	PK
4		*	17481.500	62.954	32.889	-5.246	68.200	30.065	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1322	

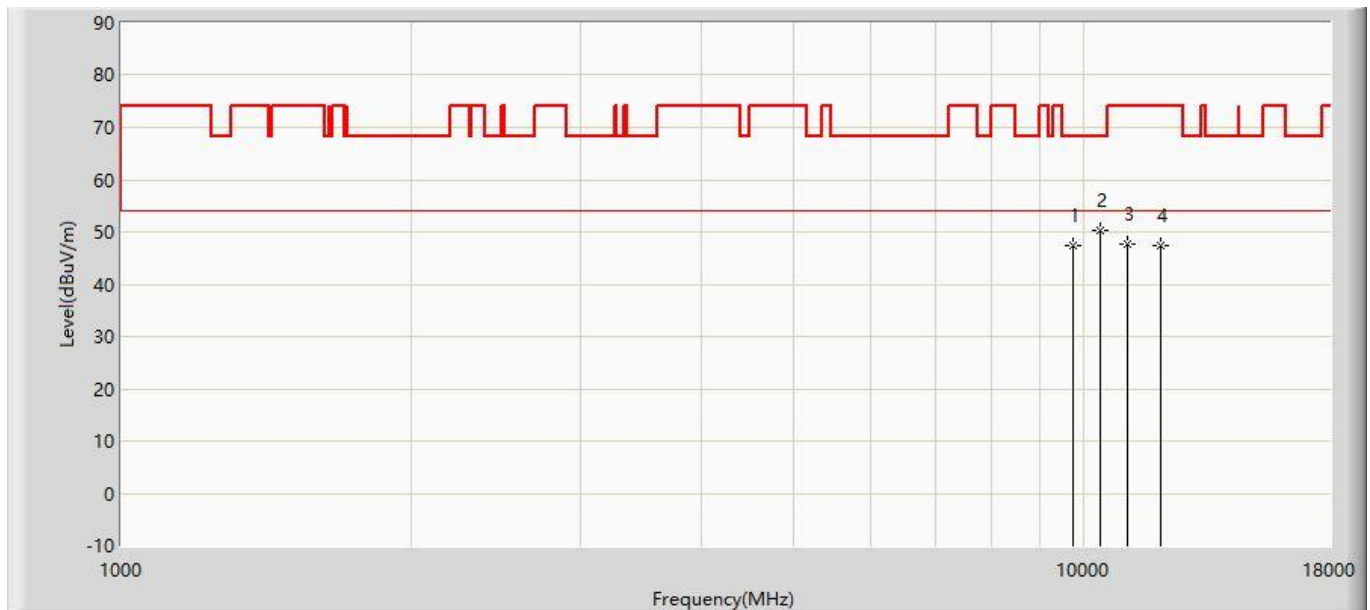


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9729.500	47.314	32.941	-20.886	68.200	14.373	PK
2		*	10384.000	50.209	33.713	-17.991	68.200	16.496	PK
3			11072.500	47.607	29.959	-26.393	74.000	17.648	PK
4			12016.000	47.483	29.664	-26.517	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1322	

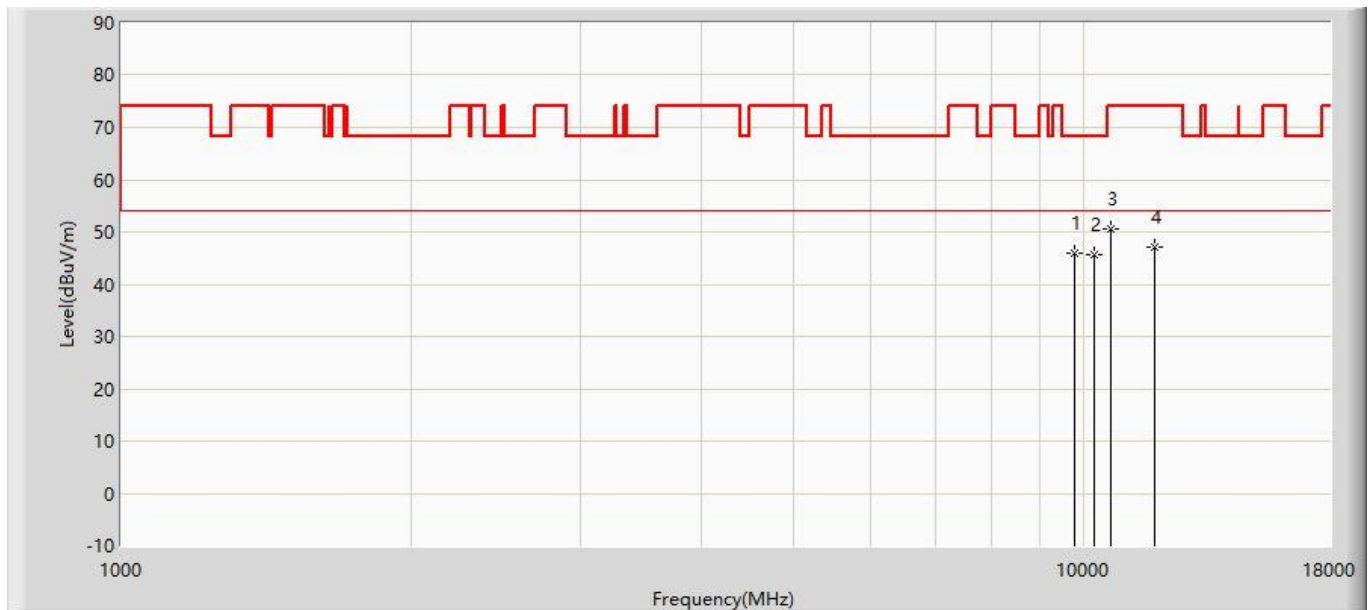


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9772.000	46.073	31.561	-22.127	68.200	14.512	PK
2			10231.000	45.789	29.785	-22.411	68.200	16.004	PK
3			10656.000	50.577	33.485	-23.423	74.000	17.092	PK
4			11820.500	47.127	29.225	-26.873	74.000	17.903	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5230MHz with OAW-AP1322	

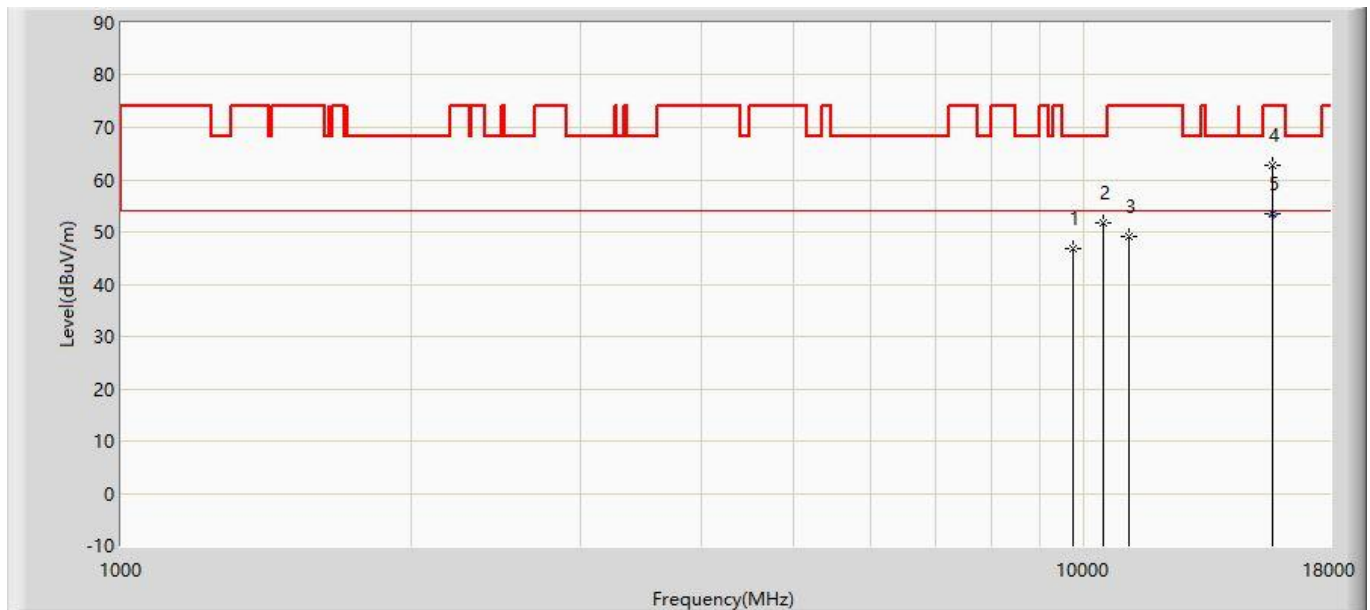


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9729.500	46.678	32.305	-21.522	68.200	14.373	PK
2			10460.500	51.697	34.954	-16.503	68.200	16.742	PK
3			11149.000	49.274	31.554	-24.726	74.000	17.720	PK
4			15679.500	62.777	41.985	-11.223	74.000	20.792	PK
5		*	15684.100	53.504	32.716	-0.496	54.000	20.788	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5230MHz with OAW-AP1322	

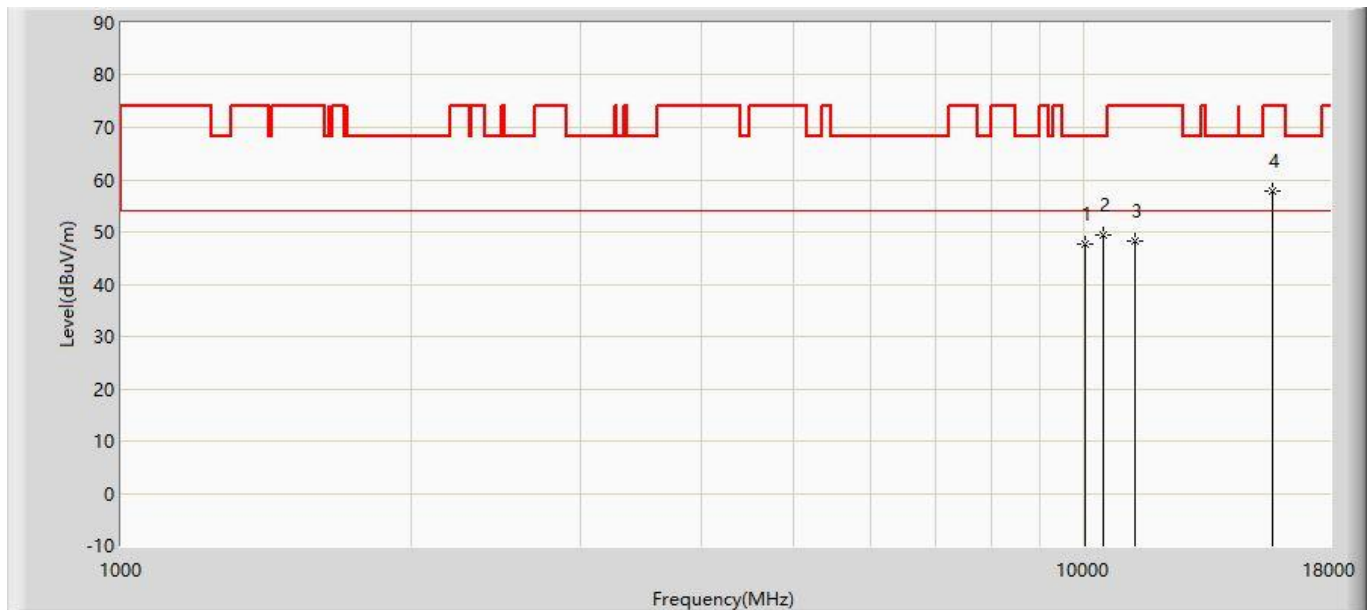


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10010.000	47.722	32.430	-20.478	68.200	15.292	PK
2			10460.500	49.423	32.680	-18.777	68.200	16.742	PK
3			11285.000	48.232	30.385	-25.768	74.000	17.847	PK
4		*	15679.500	57.765	36.973	-16.235	74.000	20.792	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5270MHz with OAW-AP1322	

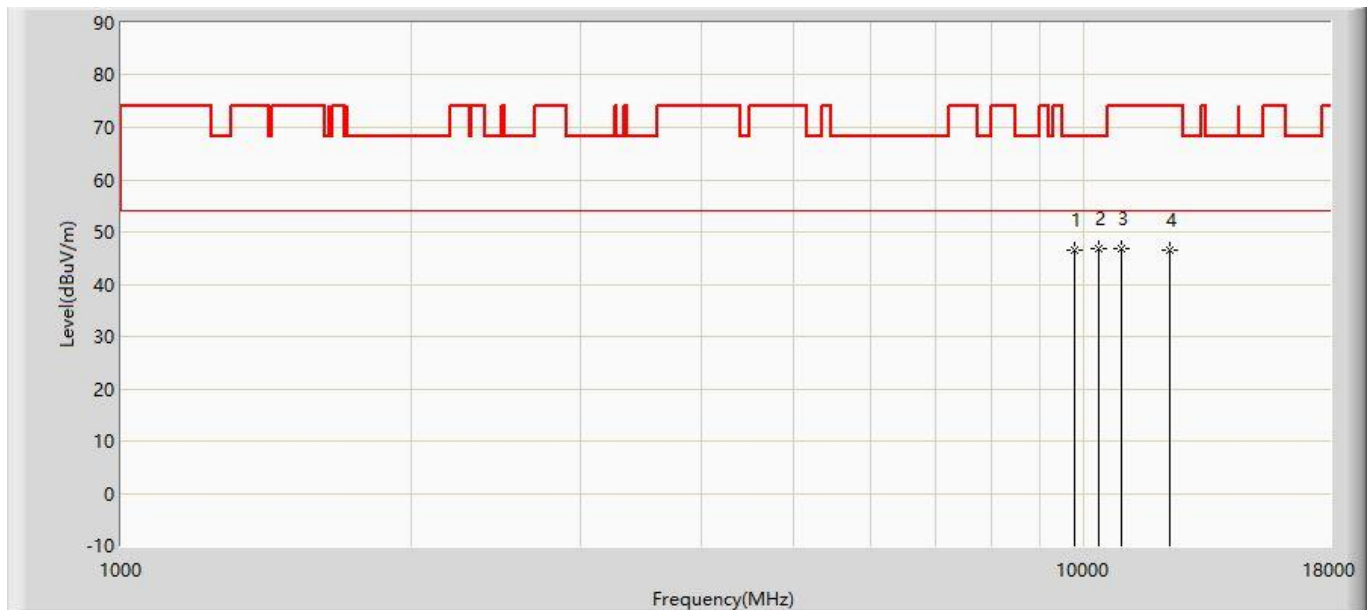


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.586	32.102	-21.614	68.200	14.485	PK
2		*	10350.000	46.818	30.431	-21.382	68.200	16.387	PK
3			10928.000	46.805	29.328	-27.195	74.000	17.477	PK
4			12279.500	46.447	28.636	-27.553	74.000	17.810	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5270MHz with OAW-AP1322	

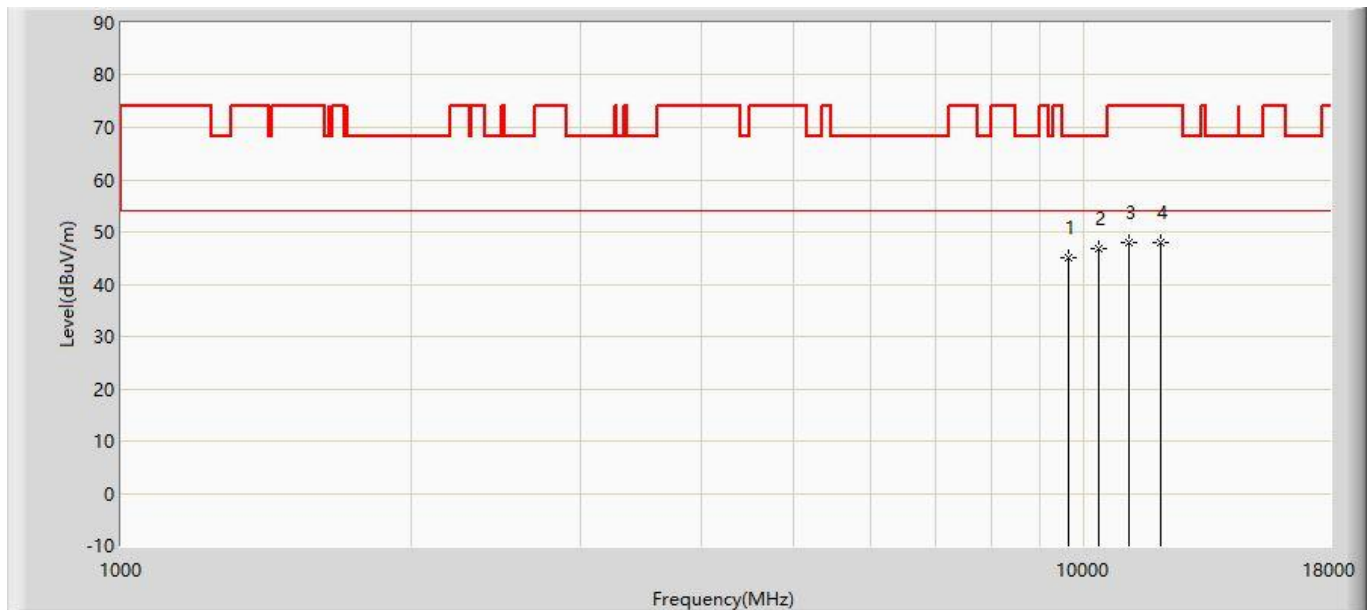


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9636.000	45.035	30.969	-23.165	68.200	14.066	PK
2		*	10350.000	46.818	30.431	-21.382	68.200	16.387	PK
3			11123.500	48.093	30.397	-25.907	74.000	17.696	PK
4			12016.000	47.925	30.106	-26.075	74.000	17.819	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1322	

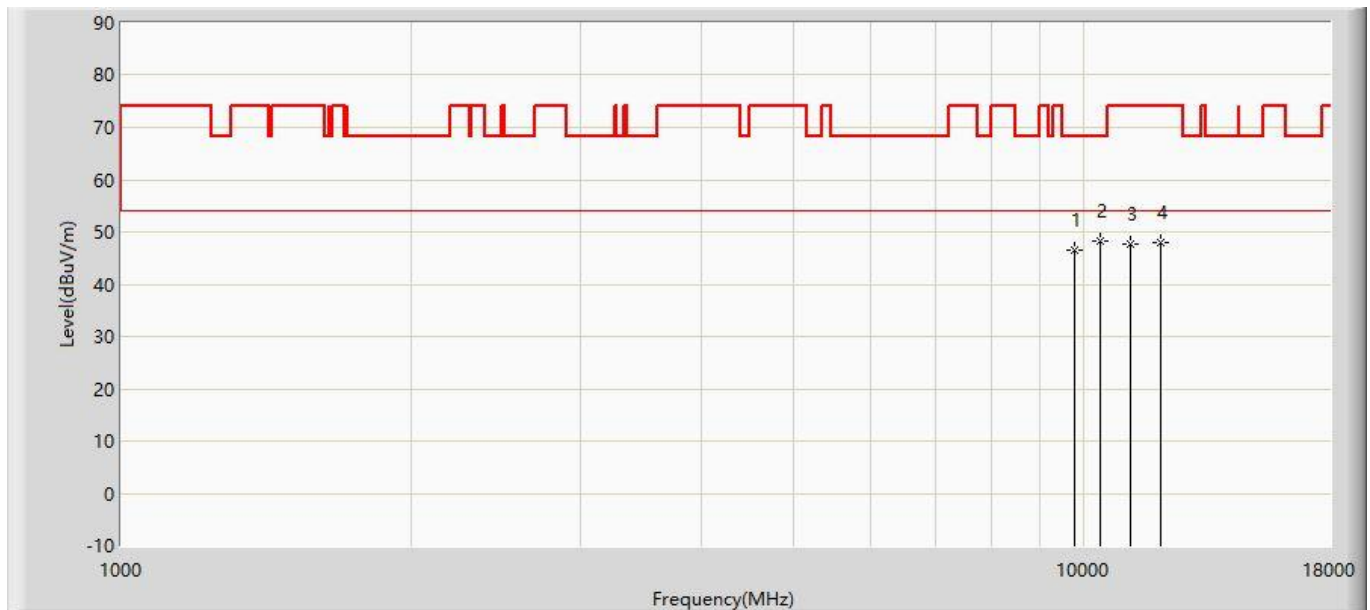


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.487	31.975	-21.713	68.200	14.512	PK
2		*	10401.000	48.159	31.608	-20.041	68.200	16.551	PK
3			11174.500	47.745	30.001	-26.255	74.000	17.743	PK
4			12016.000	47.925	30.106	-26.075	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1322	

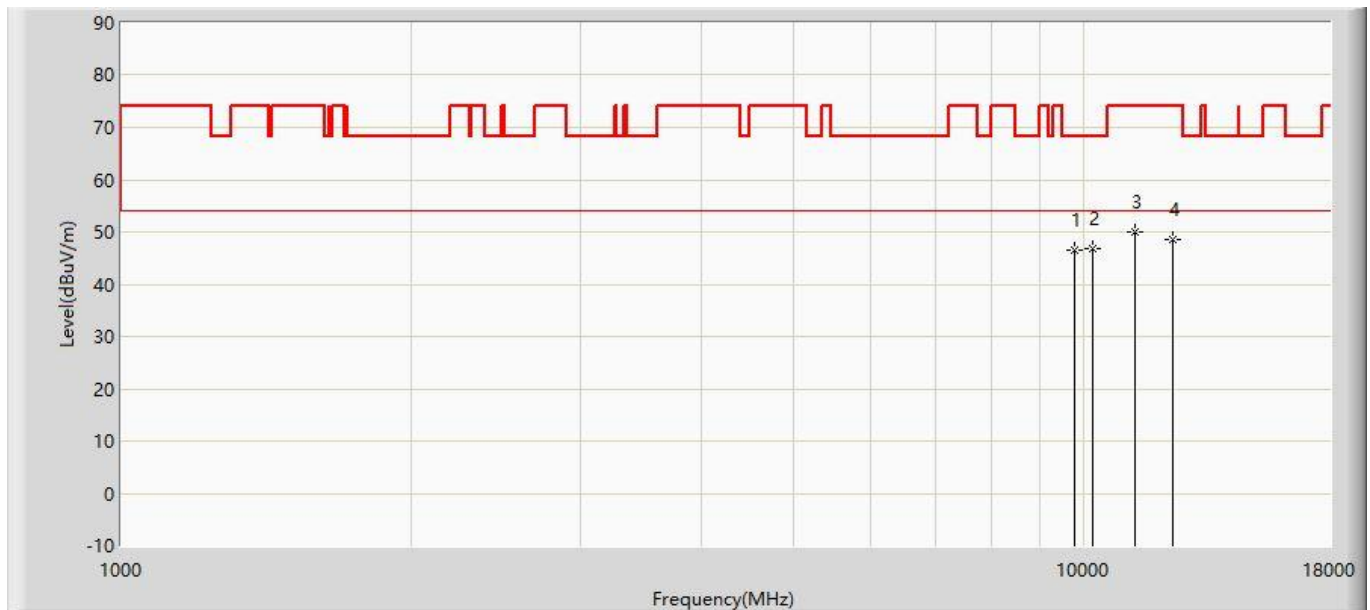


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.487	31.975	-21.713	68.200	14.512	PK
2		*	10222.500	46.896	30.919	-21.304	68.200	15.976	PK
3			11276.500	50.011	32.171	-23.989	74.000	17.840	PK
4			12381.500	48.426	30.617	-25.574	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz with OAW-AP1322	

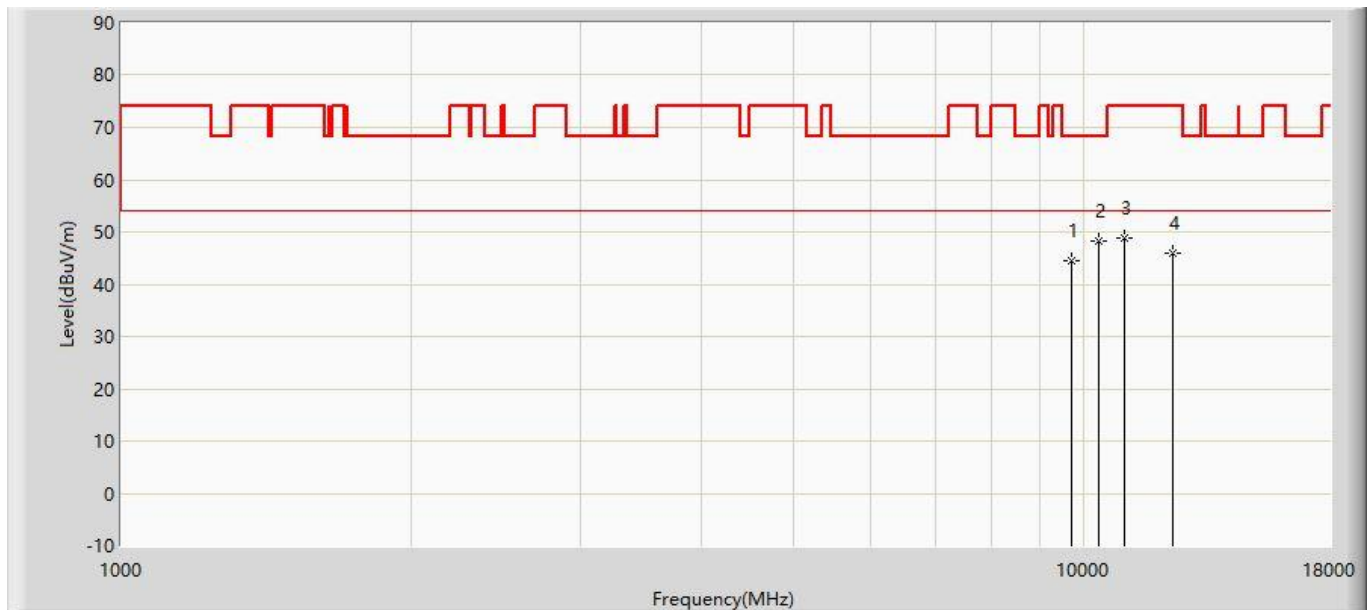


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	44.528	30.183	-23.672	68.200	14.345	PK
2		*	10341.500	48.264	31.904	-19.936	68.200	16.360	PK
3			11021.500	48.911	31.311	-25.089	74.000	17.600	PK
4			12381.500	46.029	28.220	-27.971	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz with OAW-AP1322	

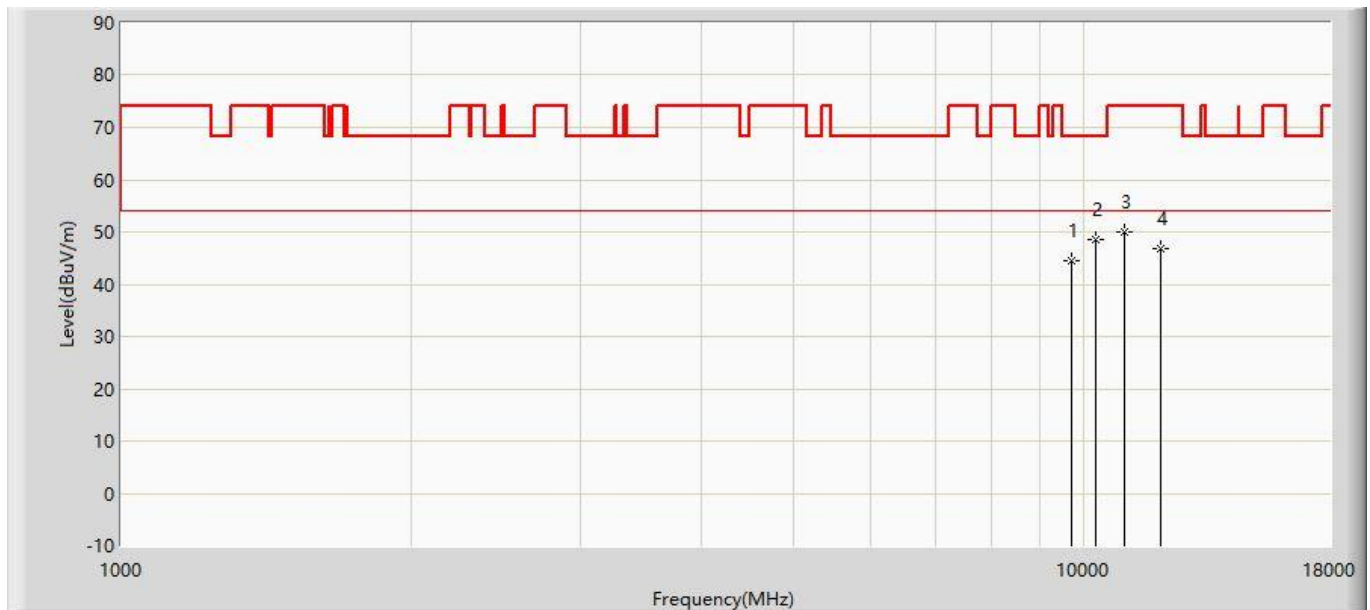


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	44.528	30.183	-23.672	68.200	14.345	PK
2		*	10299.000	48.666	32.443	-19.534	68.200	16.223	PK
3			11021.500	49.882	32.282	-24.118	74.000	17.600	PK
4			12024.500	46.734	28.915	-27.266	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5590MHz with OAW-AP1322	

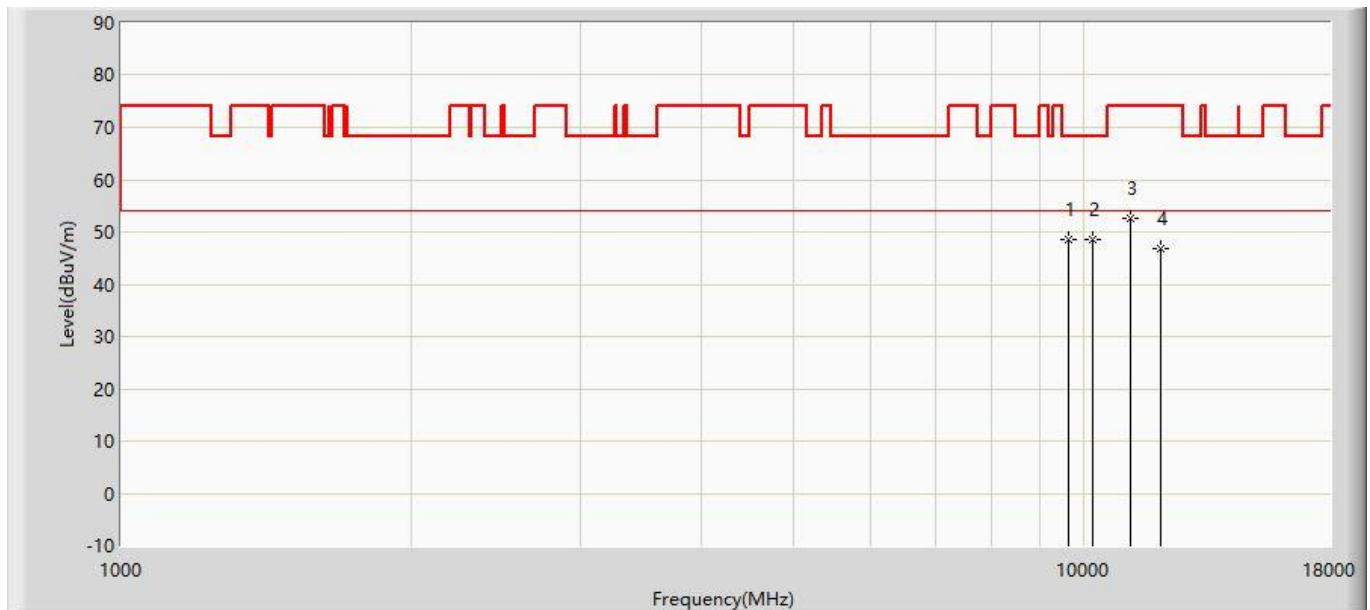


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.554	34.460	-19.646	68.200	14.094	PK
2		*	10214.000	48.615	32.666	-19.585	68.200	15.949	PK
3			11183.000	52.632	34.880	-21.368	74.000	17.752	PK
4			12024.500	46.734	28.915	-27.266	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5590MHz with OAW-AP1322	

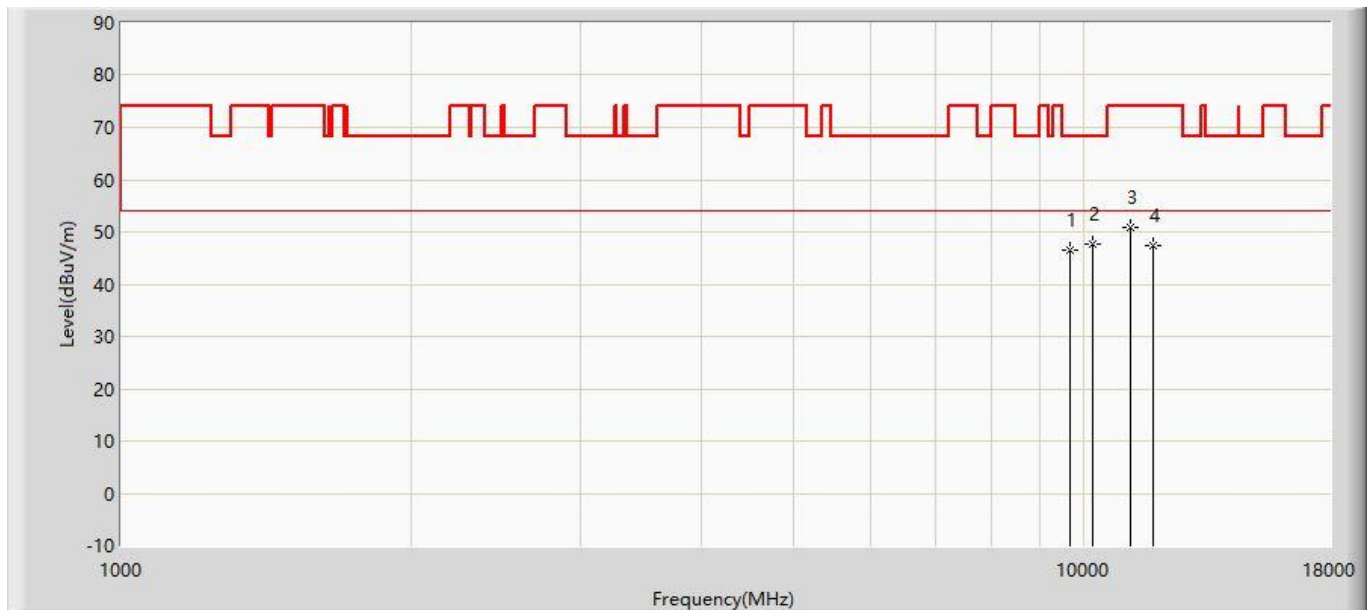


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	46.449	32.299	-21.751	68.200	14.151	PK
2		*	10214.000	47.563	31.614	-20.637	68.200	15.949	PK
3			11174.500	50.767	33.023	-23.233	74.000	17.743	PK
4			11786.500	47.475	29.556	-26.525	74.000	17.918	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz with OAW-AP1322	

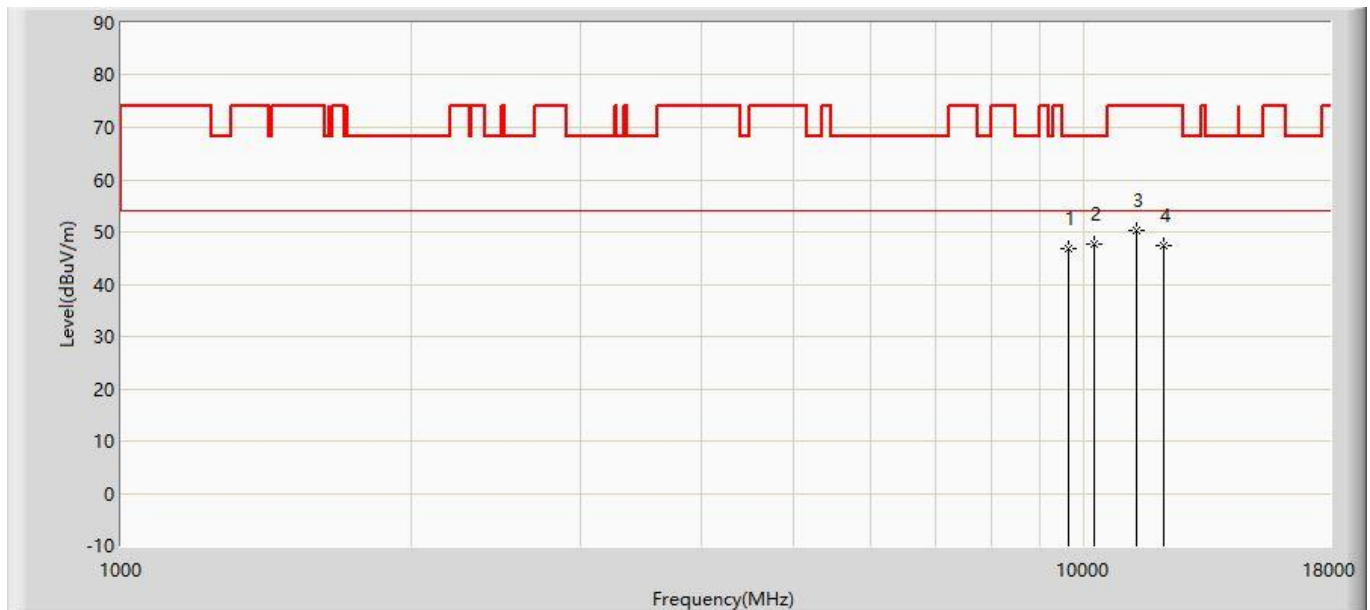


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.879	32.785	-21.321	68.200	14.094	PK
2		*	10248.000	47.634	31.575	-20.566	68.200	16.059	PK
3			11336.000	50.187	32.291	-23.813	74.000	17.896	PK
4			12101.000	47.434	29.617	-26.566	74.000	17.817	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz with OAW-AP1322	

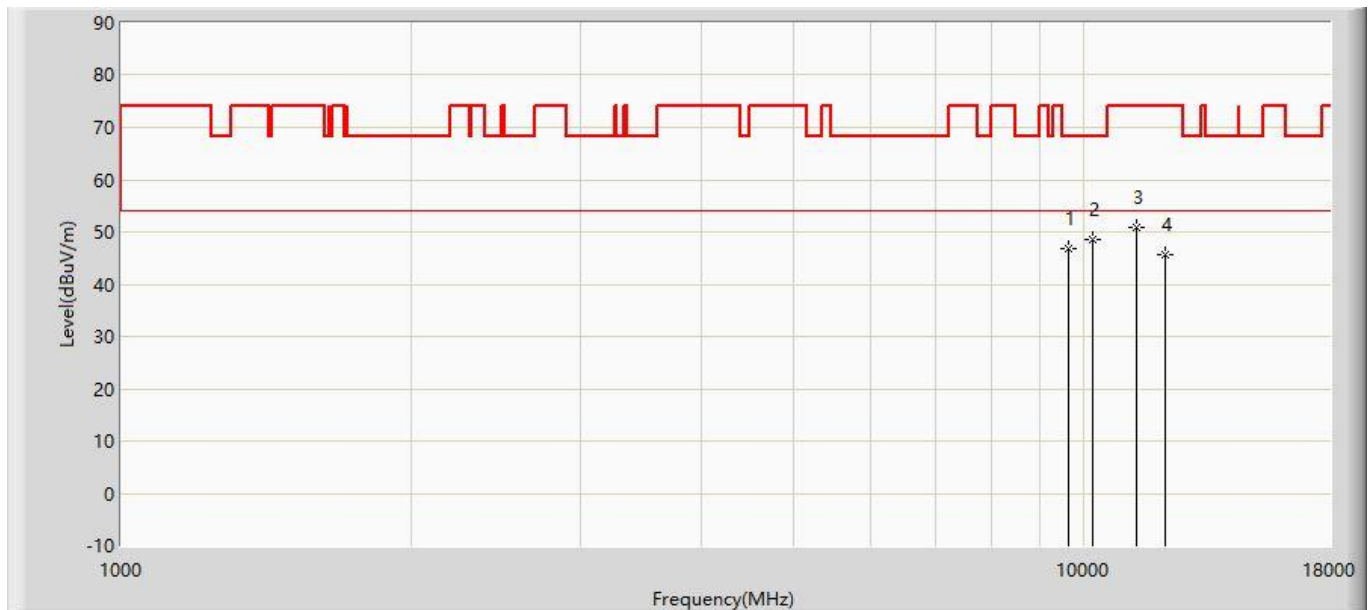


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.879	32.785	-21.321	68.200	14.094	PK
2		*	10214.000	48.652	32.703	-19.548	68.200	15.949	PK
3			11336.000	50.769	32.873	-23.231	74.000	17.896	PK
4			12135.000	45.527	27.711	-28.473	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5710MHz with OAW-AP1322	

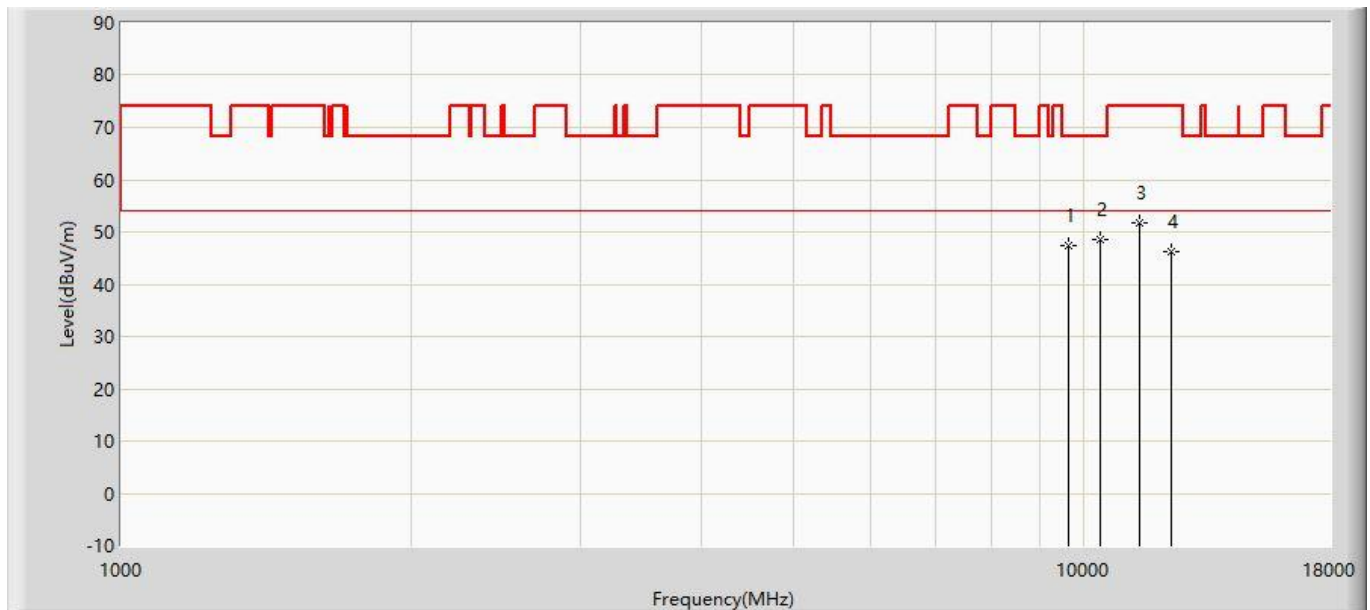


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.315	33.221	-20.885	68.200	14.094	PK
2		*	10392.500	48.579	32.056	-19.621	68.200	16.524	PK
3			11421.000	51.752	33.777	-22.248	74.000	17.975	PK
4			12339.000	46.145	28.335	-27.855	74.000	17.810	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5710MHz with OAW-AP1322	

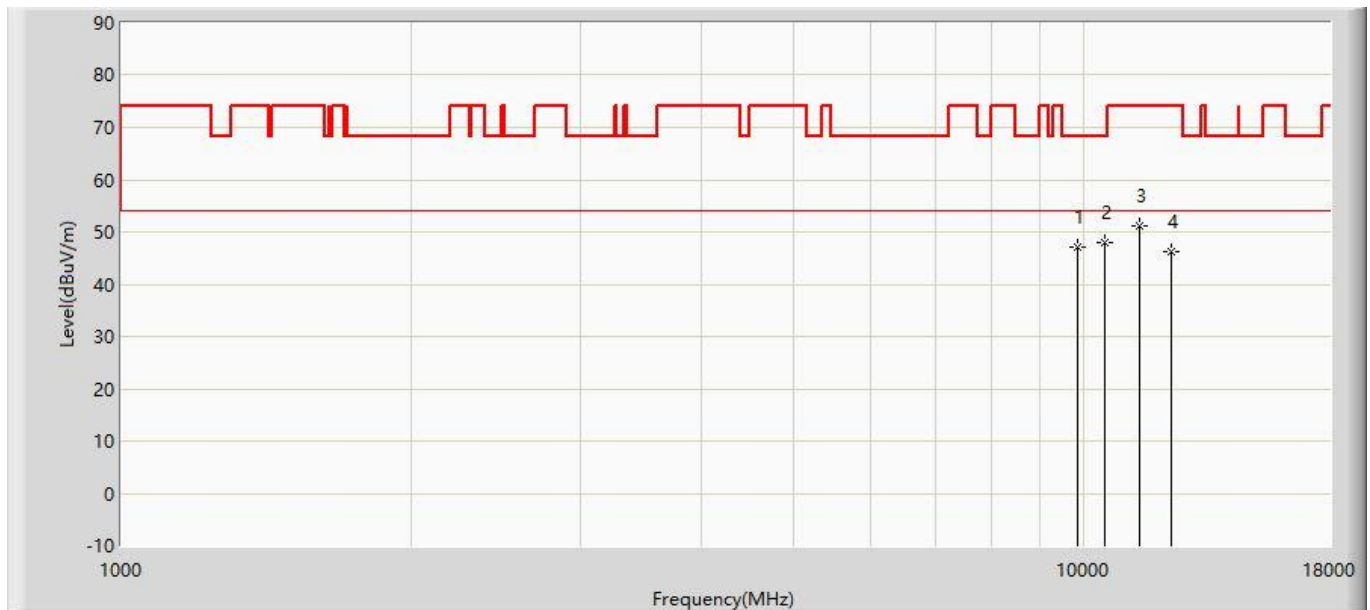


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	47.002	32.212	-21.198	68.200	14.790	PK
2		*	10503.000	47.995	31.122	-20.205	68.200	16.873	PK
3			11429.500	51.236	33.253	-22.764	74.000	17.984	PK
4			12339.000	46.145	28.335	-27.855	74.000	17.810	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz with OAW-AP1322	

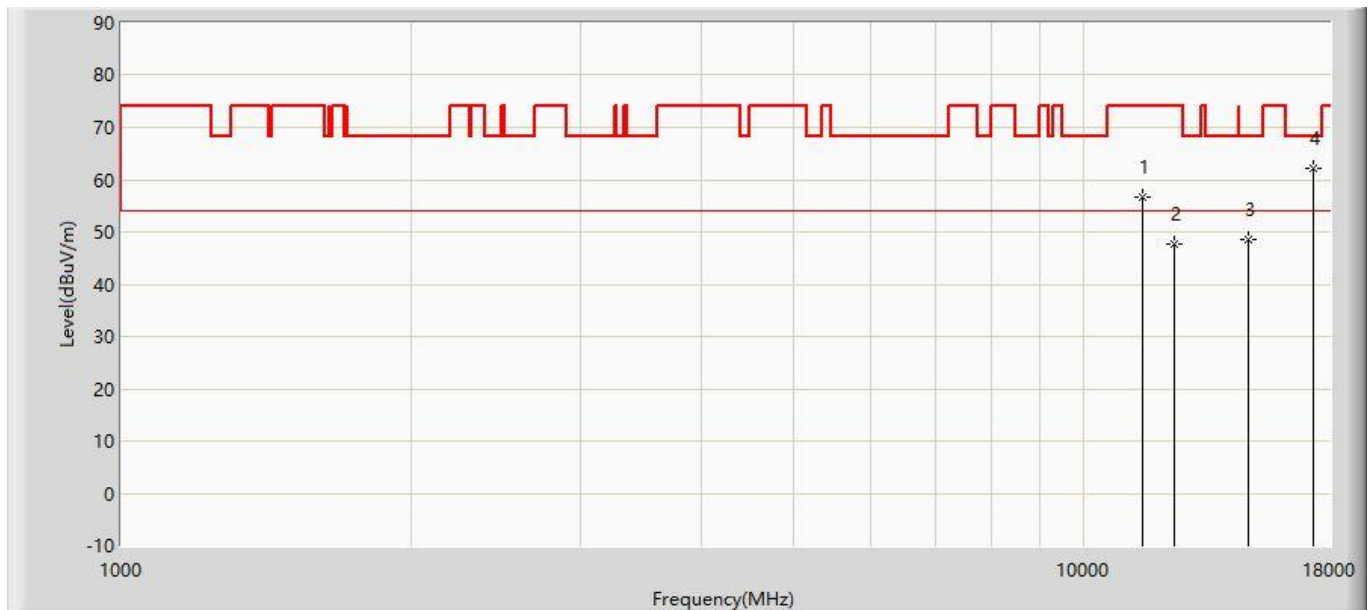


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11506.000	56.732	38.685	-17.268	74.000	18.047	PK
2			12424.000	47.659	29.852	-26.341	74.000	17.807	PK
3			14821.000	48.658	27.916	-19.542	68.200	20.742	PK
4		*	17277.500	62.281	34.146	-5.919	68.200	28.134	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz with OAW-AP1322	

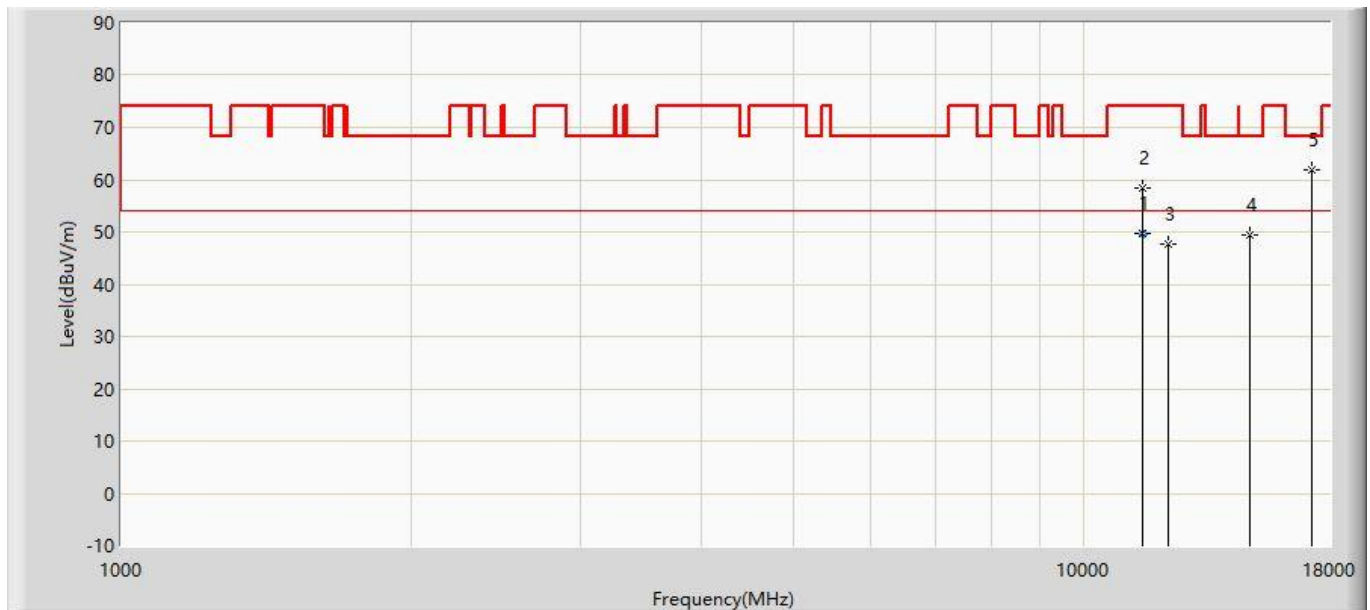


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	11510.300	49.780	31.735	-4.220	54.000	18.046	AV
2			11514.500	58.263	40.220	-15.737	74.000	18.044	PK
3			12211.500	47.593	29.779	-26.407	74.000	17.814	PK
4			14863.500	49.390	28.637	-18.810	68.200	20.752	PK
5			17260.500	61.987	34.013	-6.213	68.200	27.974	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz with OAW-AP1322	

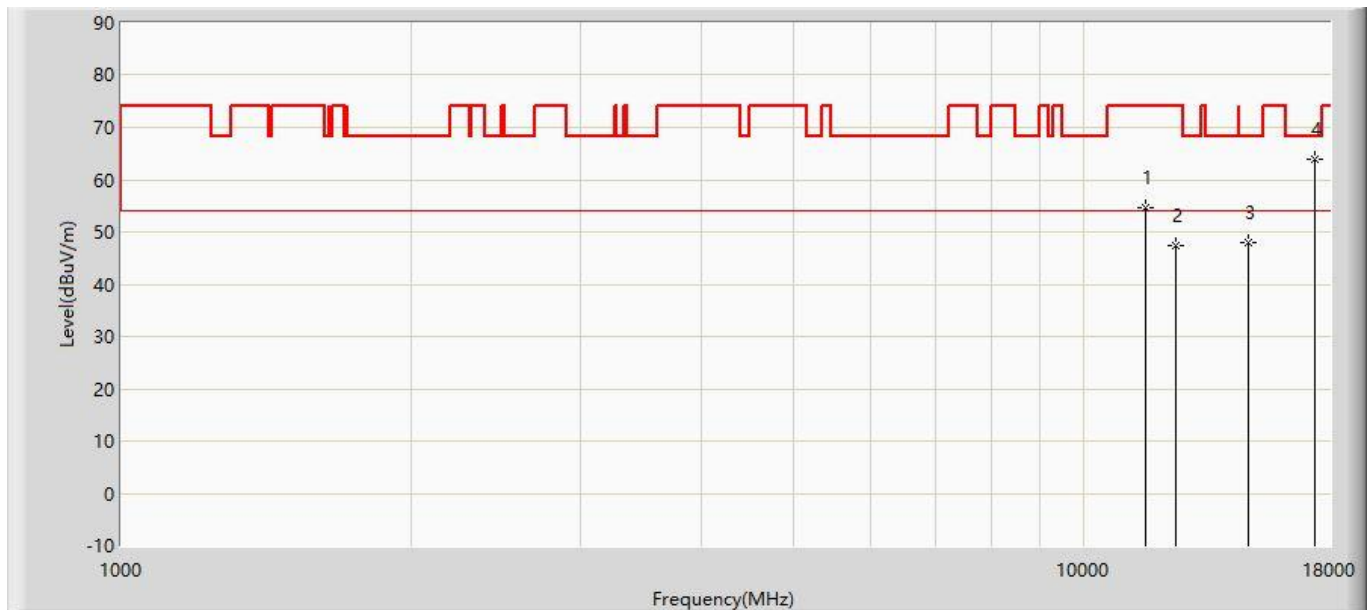


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11582.500	54.497	36.485	-19.503	74.000	18.012	PK
2			12432.500	47.527	29.720	-26.473	74.000	17.808	PK
3			14812.500	48.036	27.296	-20.164	68.200	20.739	PK
4		*	17371.000	63.948	34.928	-4.252	68.200	29.020	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz with OAW-AP1322	

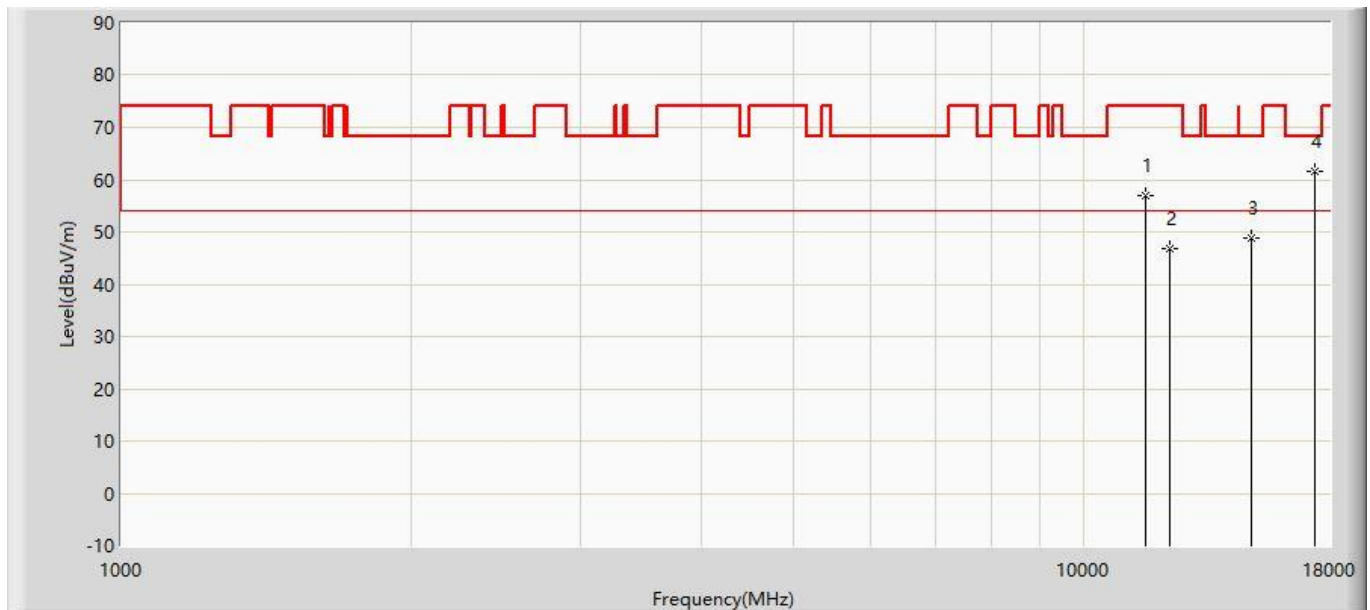


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11582.500	57.000	38.988	-17.000	74.000	18.012	PK
2			12271.000	46.850	29.039	-27.150	74.000	17.811	PK
3			14897.500	48.887	28.125	-19.313	68.200	20.763	PK
4		*	17379.500	61.665	32.564	-6.535	68.200	29.101	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz with OAW-AP1322	

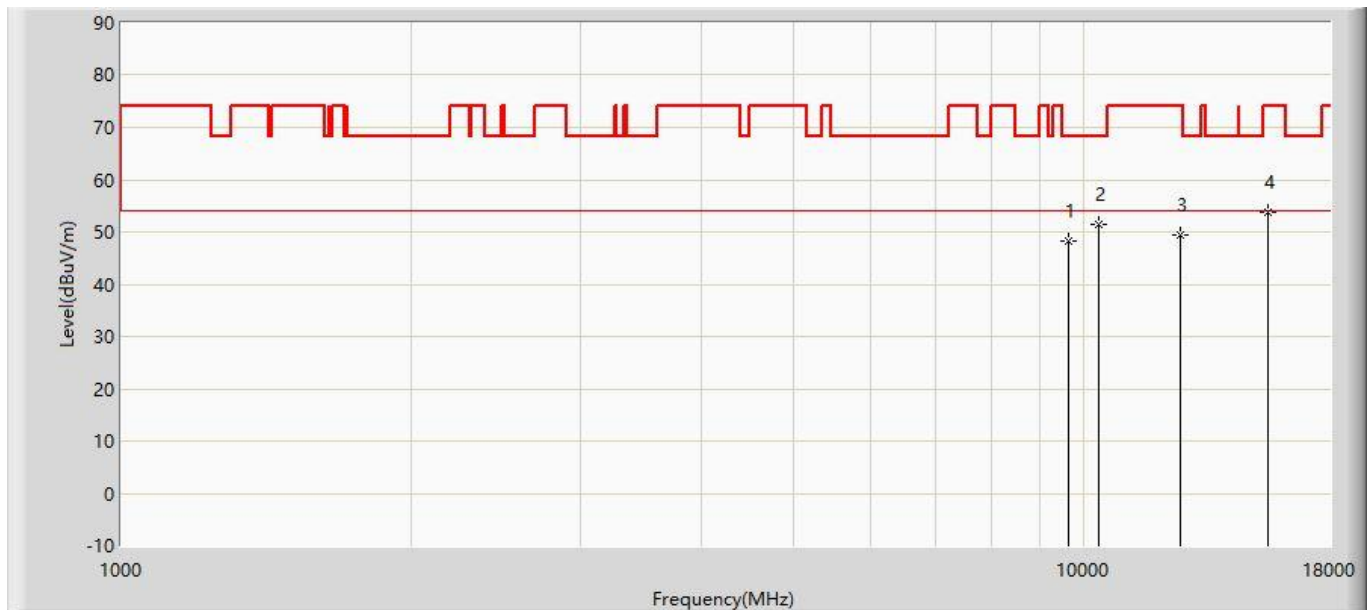


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.388	34.294	-19.812	68.200	14.094	PK
2		*	10358.500	51.440	35.026	-16.760	68.200	16.414	PK
3			12594.000	49.546	31.499	-24.454	74.000	18.047	PK
4			15543.500	53.634	32.723	-20.366	74.000	20.912	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz with OAW-AP1322	

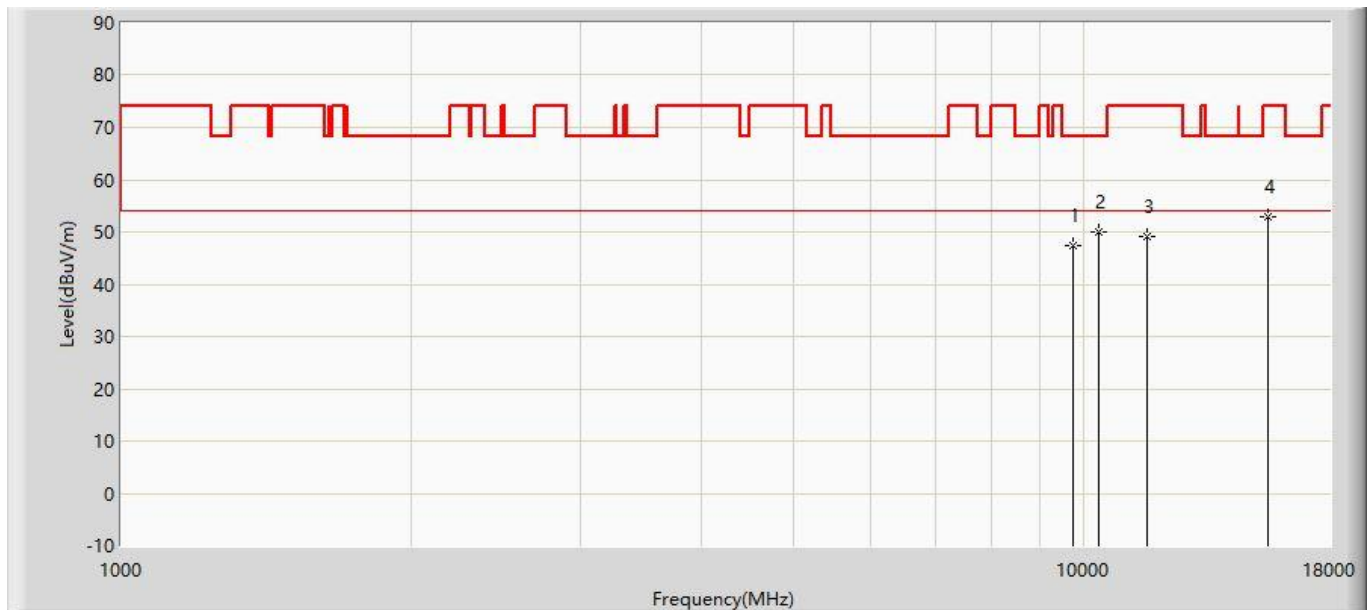


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	47.327	32.926	-20.873	68.200	14.401	PK
2		*	10358.500	50.110	33.696	-18.090	68.200	16.414	PK
3			11633.500	49.078	31.089	-24.922	74.000	17.989	PK
4			15543.500	52.943	32.032	-21.057	74.000	20.912	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5220MHz with OAW-AP1322	

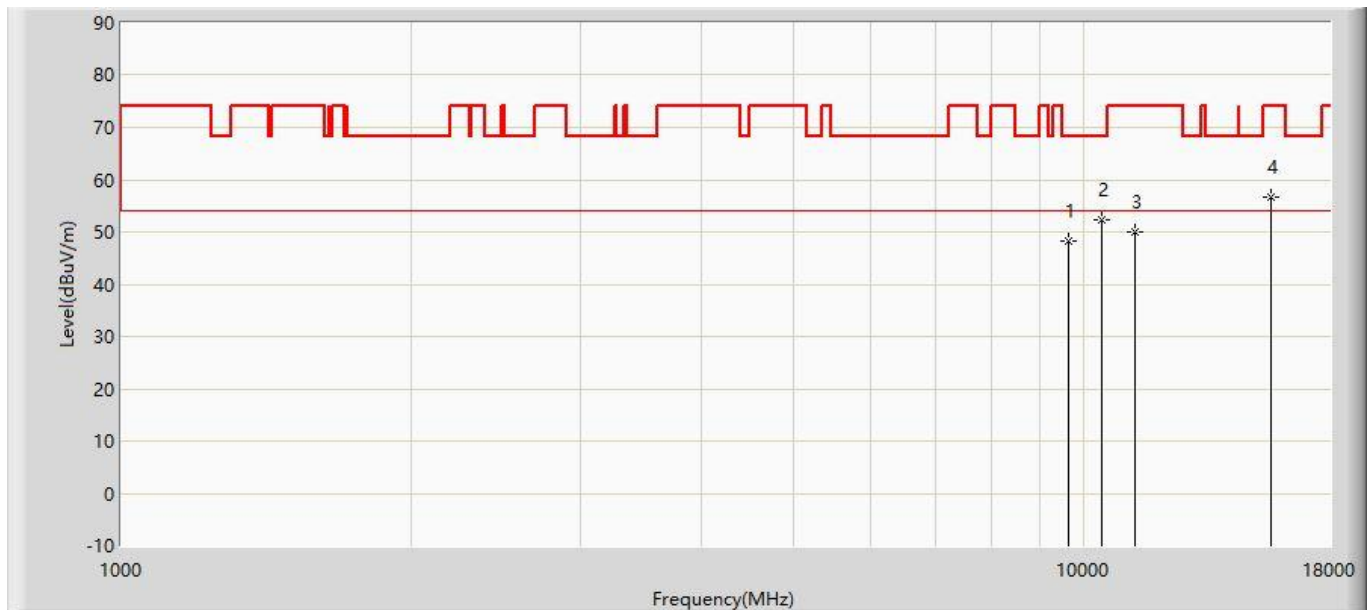


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.361	34.267	-19.839	68.200	14.094	PK
2		*	10443.500	52.367	35.679	-15.833	68.200	16.688	PK
3			11302.000	49.954	32.090	-24.046	74.000	17.864	PK
4			15654.000	56.739	35.924	-17.261	74.000	20.815	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5220MHz with OAW-AP1322	

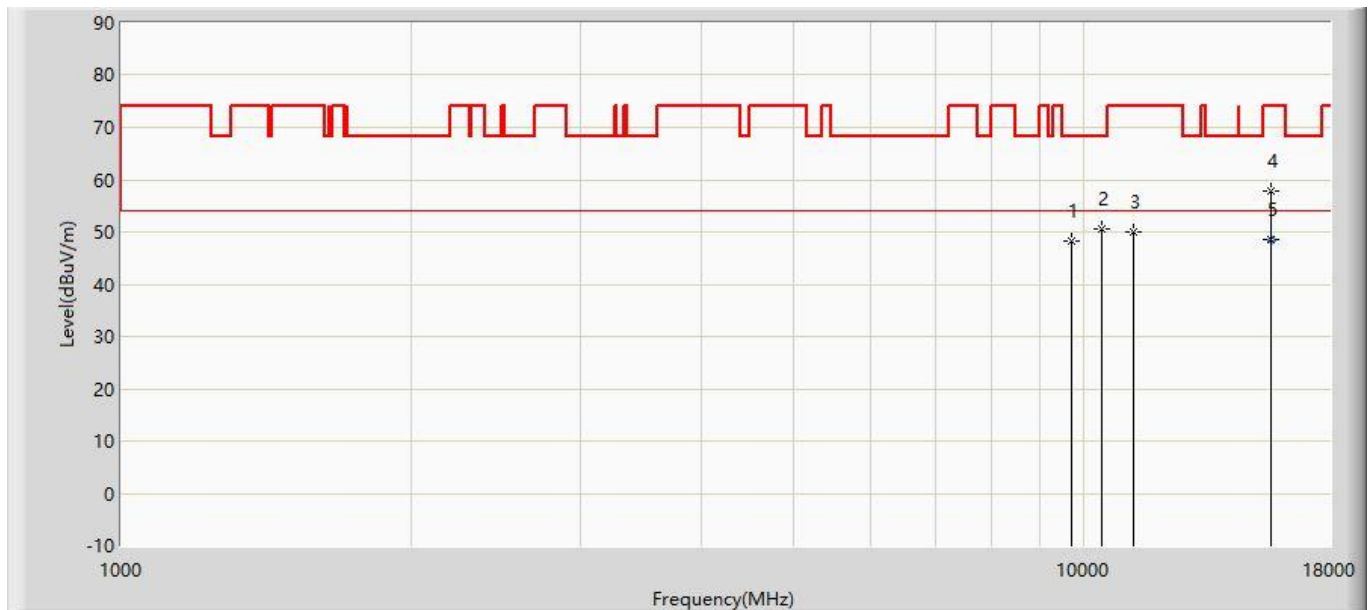


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	48.202	33.913	-19.998	68.200	14.289	PK
2			10443.500	50.637	33.949	-17.563	68.200	16.688	PK
3			11268.000	50.021	32.189	-23.979	74.000	17.832	PK
4			15645.500	57.919	37.097	-16.081	74.000	20.822	PK
5		*	15661.600	48.470	27.662	-5.530	54.000	20.808	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5240MHz with OAW-AP1322	

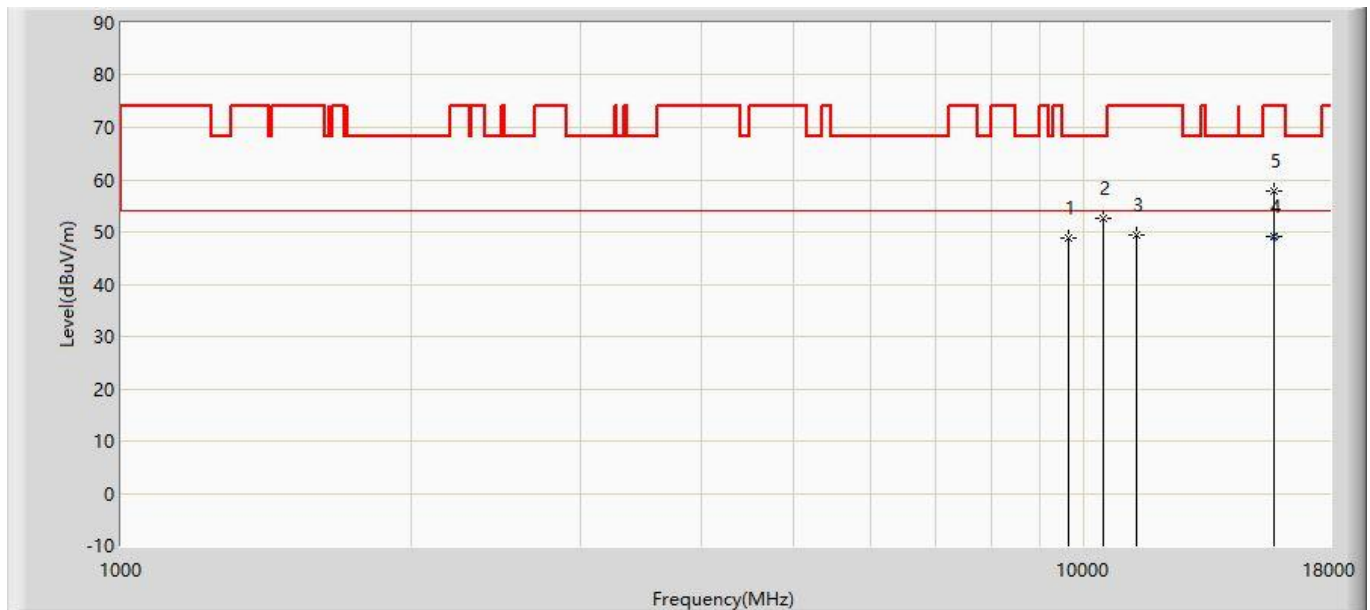


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.918	34.824	-19.282	68.200	14.094	PK
2			10477.500	52.526	35.729	-15.674	68.200	16.797	PK
3			11336.000	49.361	31.465	-24.639	74.000	17.896	PK
4		*	15719.600	49.119	28.363	-4.881	54.000	20.756	AV
5			15722.000	57.776	37.022	-16.224	74.000	20.754	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5240MHz with OAW-AP1322	

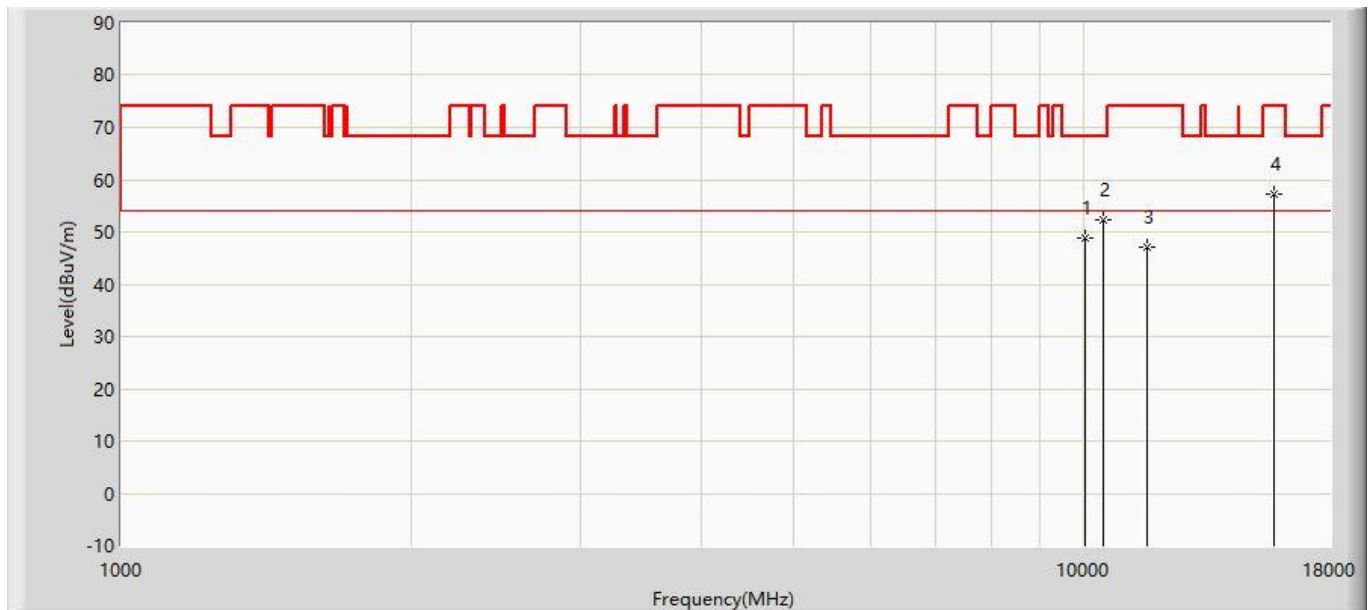


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10010.000	48.828	33.536	-19.372	68.200	15.292	PK
2		*	10477.500	52.183	35.386	-16.017	68.200	16.797	PK
3			11633.500	47.227	29.238	-26.773	74.000	17.989	PK
4			15730.500	57.202	36.455	-16.798	74.000	20.747	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5260MHz with OAW-AP1322	

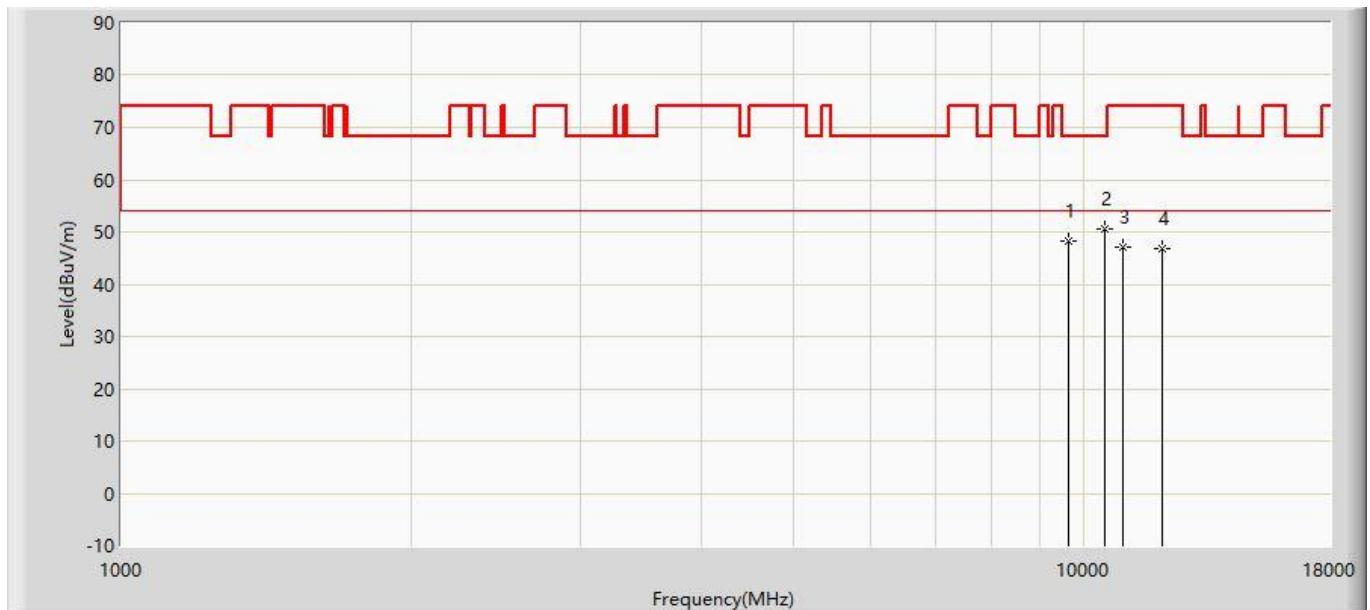


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.203	34.109	-19.997	68.200	14.094	PK
2		*	10520.000	50.575	33.677	-17.625	68.200	16.898	PK
3			10970.500	47.052	29.514	-26.948	74.000	17.538	PK
4			12058.500	46.888	29.070	-27.112	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5260MHz with OAW-AP1322	

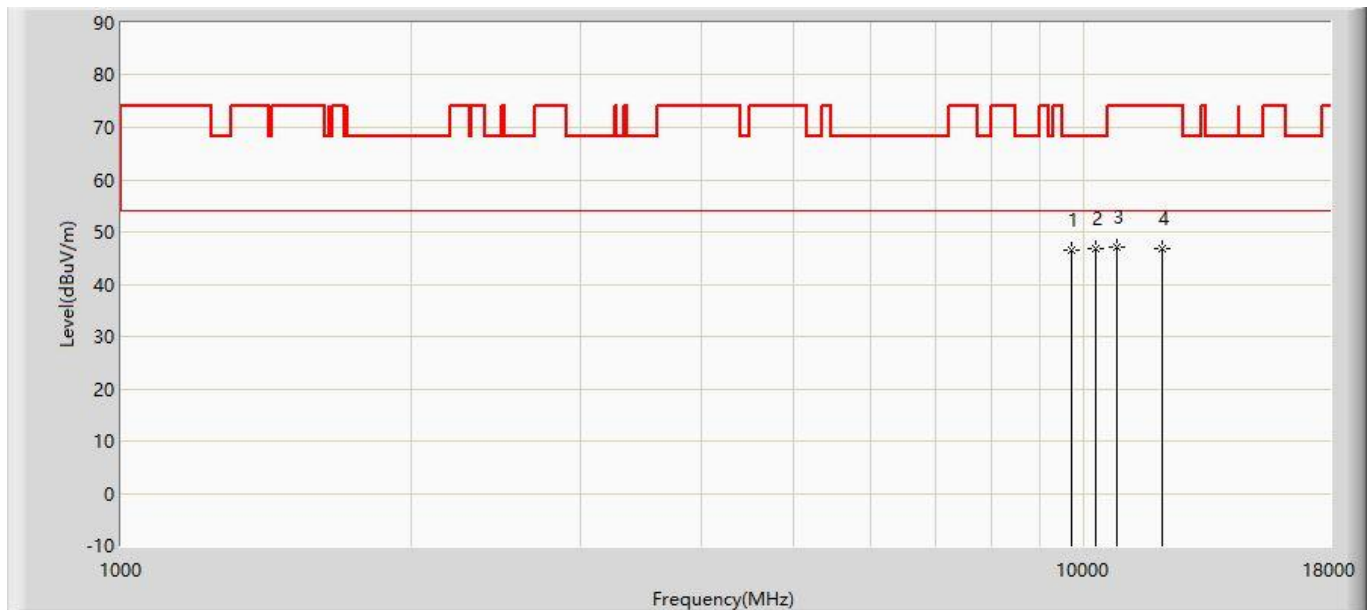


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9687.000	46.618	32.386	-21.582	68.200	14.232	PK
2		*	10265.000	46.772	30.659	-21.428	68.200	16.113	PK
3			10826.000	47.225	29.892	-26.775	74.000	17.333	PK
4			12058.500	46.888	29.070	-27.112	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5300MHz with OAW-AP1322	

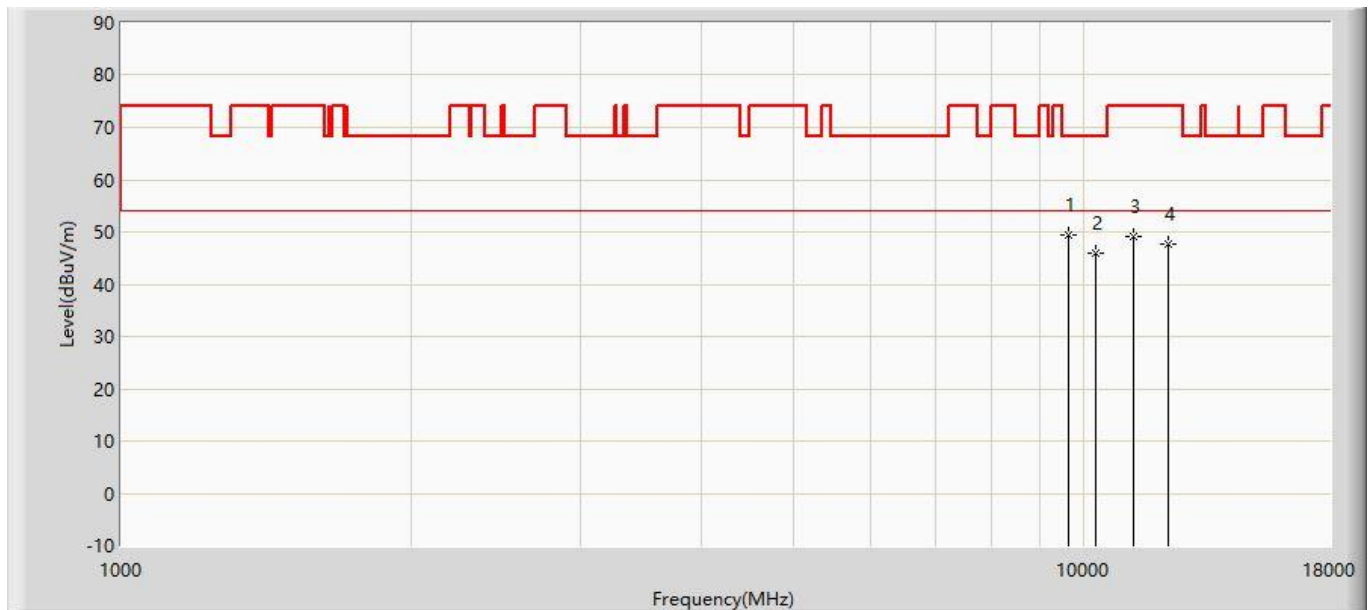


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	49.280	35.186	-18.920	68.200	14.094	PK
2			10265.000	46.053	29.940	-22.147	68.200	16.113	PK
3			11268.000	49.264	31.432	-24.736	74.000	17.832	PK
4			12228.500	47.683	29.869	-26.317	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5300MHz with OAW-AP1322	

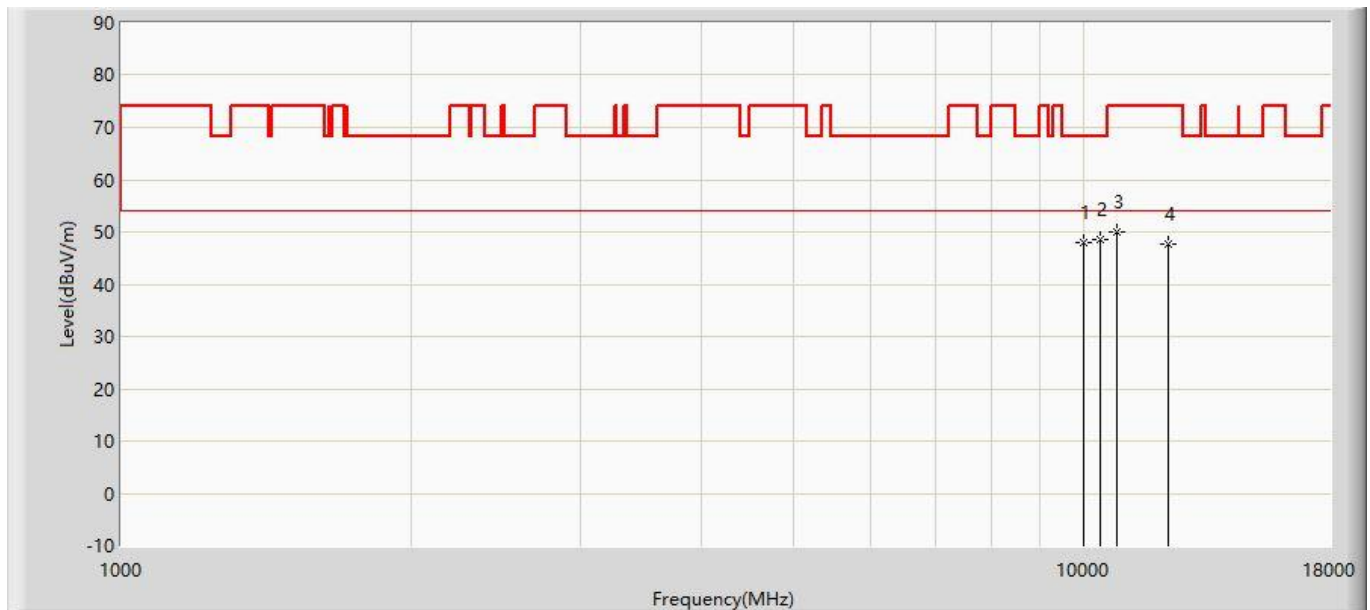


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9976.000	47.883	32.701	-20.317	68.200	15.182	PK
2		*	10392.500	48.597	32.074	-19.603	68.200	16.524	PK
3			10834.500	49.967	32.622	-24.033	74.000	17.345	PK
4			12228.500	47.683	29.869	-26.317	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with OAW-AP1322	

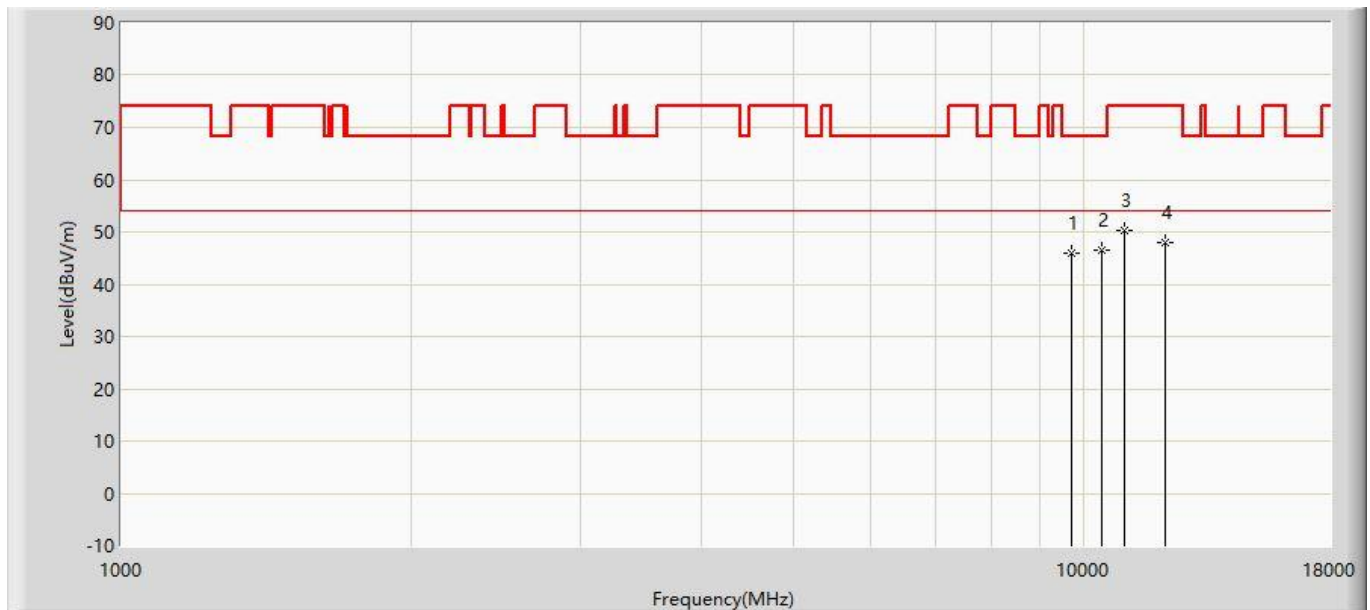


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	45.892	31.547	-22.308	68.200	14.345	PK
2		*	10443.500	46.619	29.931	-21.581	68.200	16.688	PK
3			10996.000	50.377	32.802	-23.623	74.000	17.575	PK
4			12143.500	48.024	30.208	-25.976	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with OAW-AP1322	

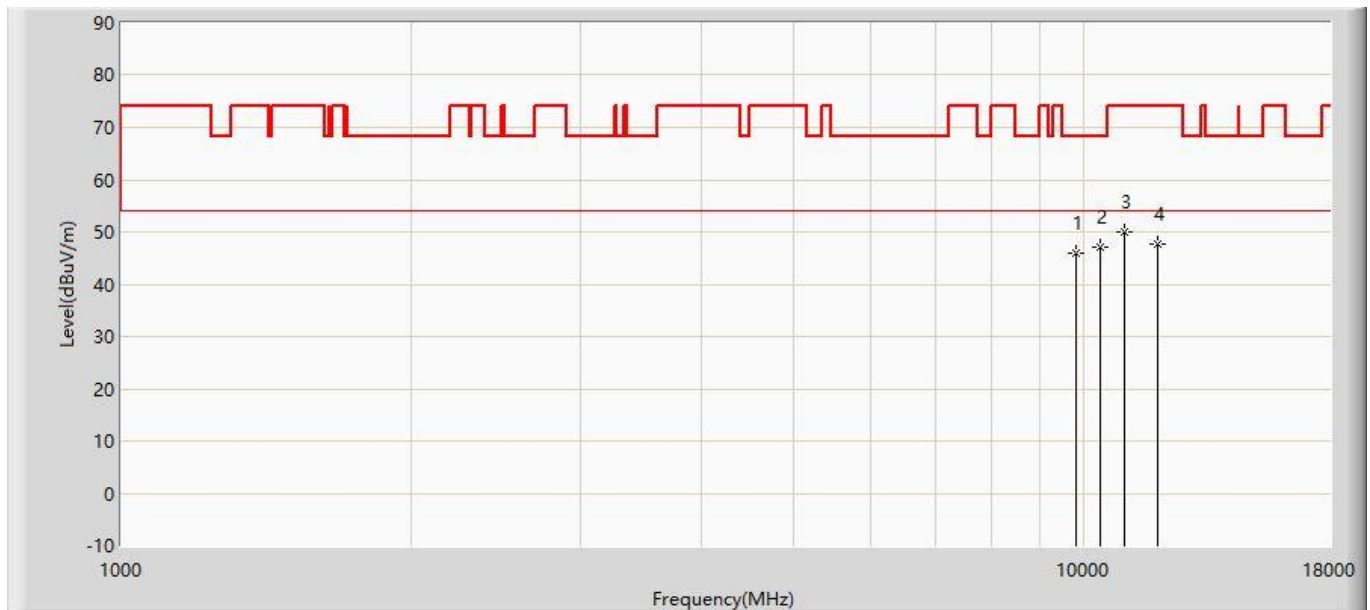


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	45.881	31.229	-22.319	68.200	14.652	PK
2		*	10375.500	47.231	30.762	-20.969	68.200	16.470	PK
3			11004.500	50.018	32.434	-23.982	74.000	17.584	PK
4			11914.000	47.776	29.916	-26.224	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5600MHz with OAW-AP1322	

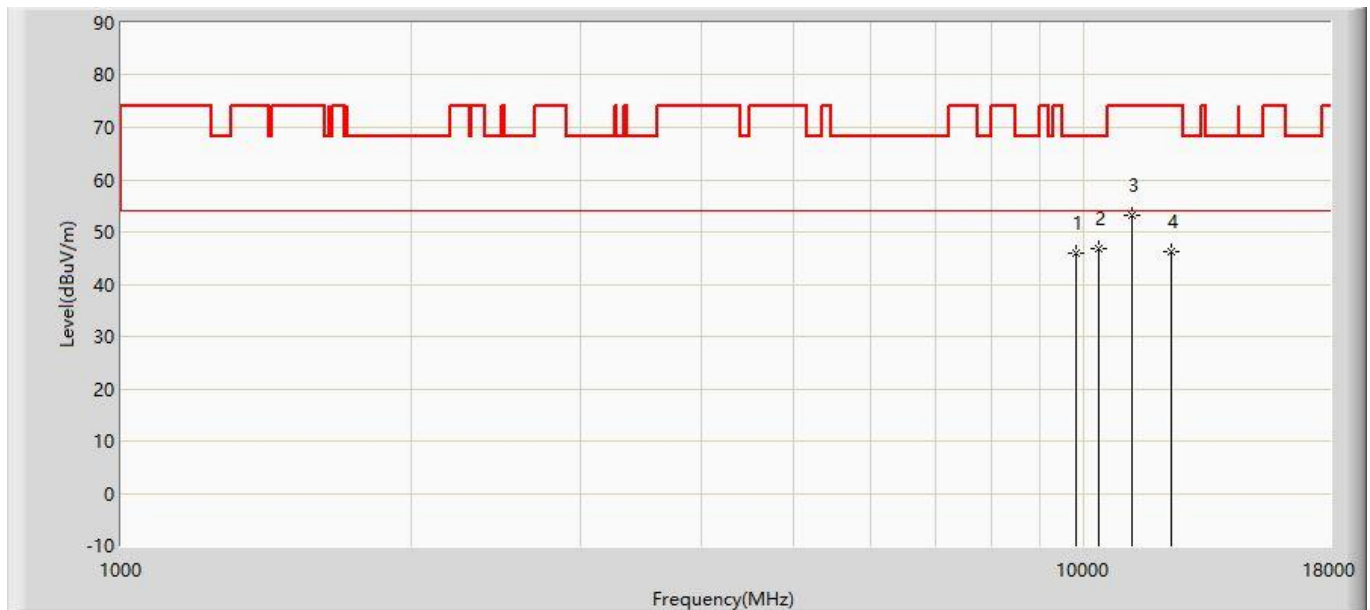


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	45.881	31.229	-22.319	68.200	14.652	PK
2			10350.000	46.683	30.296	-21.517	68.200	16.387	PK
3		*	11200.000	53.063	35.295	-20.937	74.000	17.768	PK
4			12330.500	46.242	28.432	-27.758	74.000	17.810	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5600MHz with OAW-AP1322	

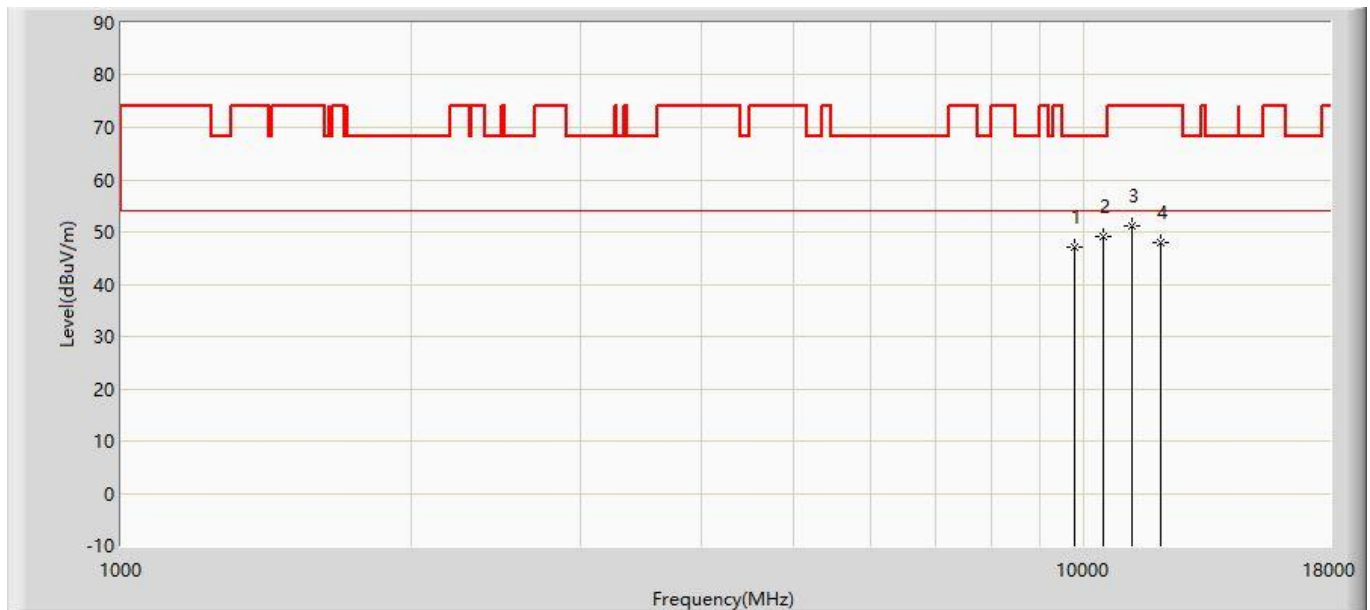


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	47.197	32.713	-21.003	68.200	14.485	PK
2		*	10469.000	49.094	32.324	-19.106	68.200	16.770	PK
3			11200.000	51.032	33.264	-22.968	74.000	17.768	PK
4			12024.500	47.937	30.118	-26.063	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz with OAW-AP1322	

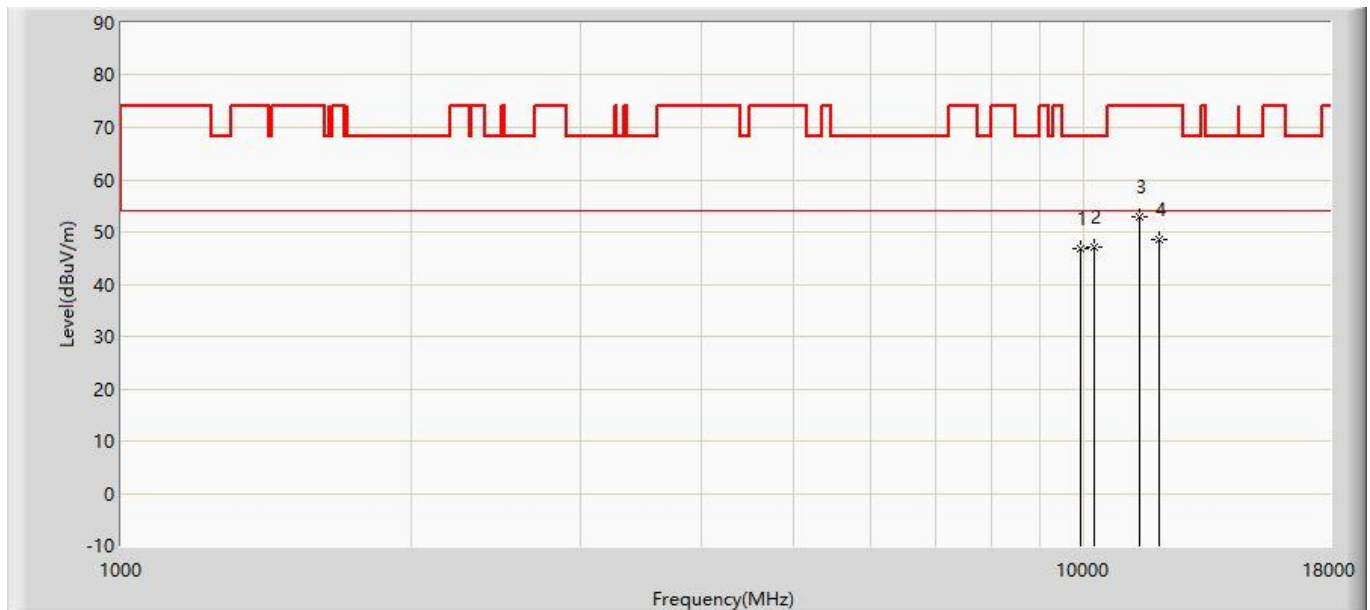


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9908.000	46.810	31.851	-21.390	68.200	14.959	PK
2		*	10231.000	47.204	31.200	-20.996	68.200	16.004	PK
3			11404.000	52.845	34.885	-21.155	74.000	17.960	PK
4			11948.000	48.488	30.644	-25.512	74.000	17.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz with OAW-AP1322	

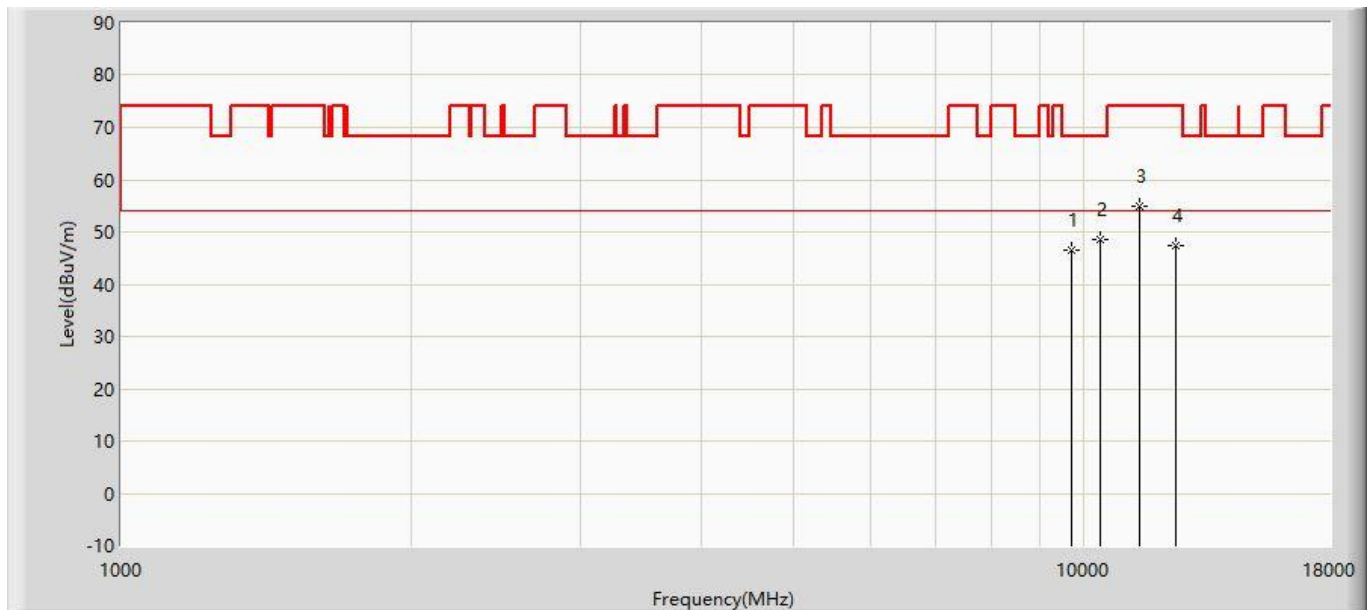


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	46.452	32.107	-21.748	68.200	14.345	PK
2			10401.000	48.688	32.137	-19.512	68.200	16.551	PK
3		*	11404.000	54.796	36.836	-19.204	74.000	17.960	PK
4			12441.000	47.387	29.580	-26.613	74.000	17.807	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5720MHz with OAW-AP1322	

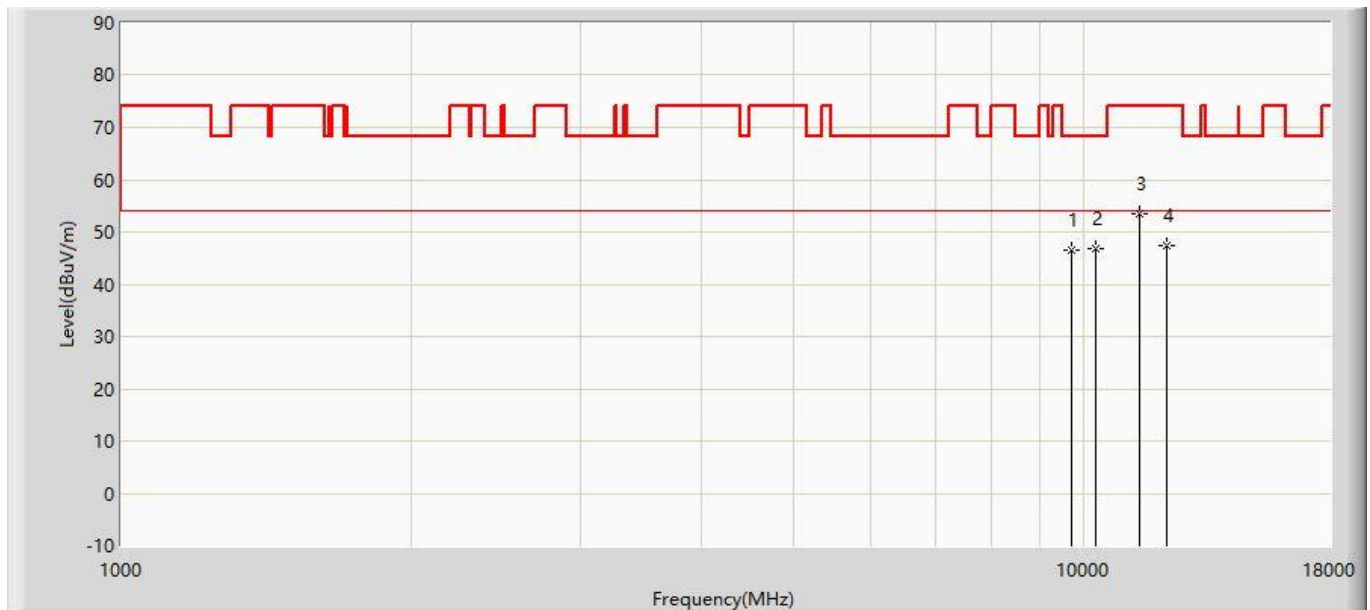


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	46.452	32.107	-21.748	68.200	14.345	PK
2			10265.000	46.740	30.627	-21.460	68.200	16.113	PK
3		*	11438.000	53.534	35.543	-20.466	74.000	17.991	PK
4			12169.000	47.451	29.635	-26.549	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5720MHz with OAW-AP1322	

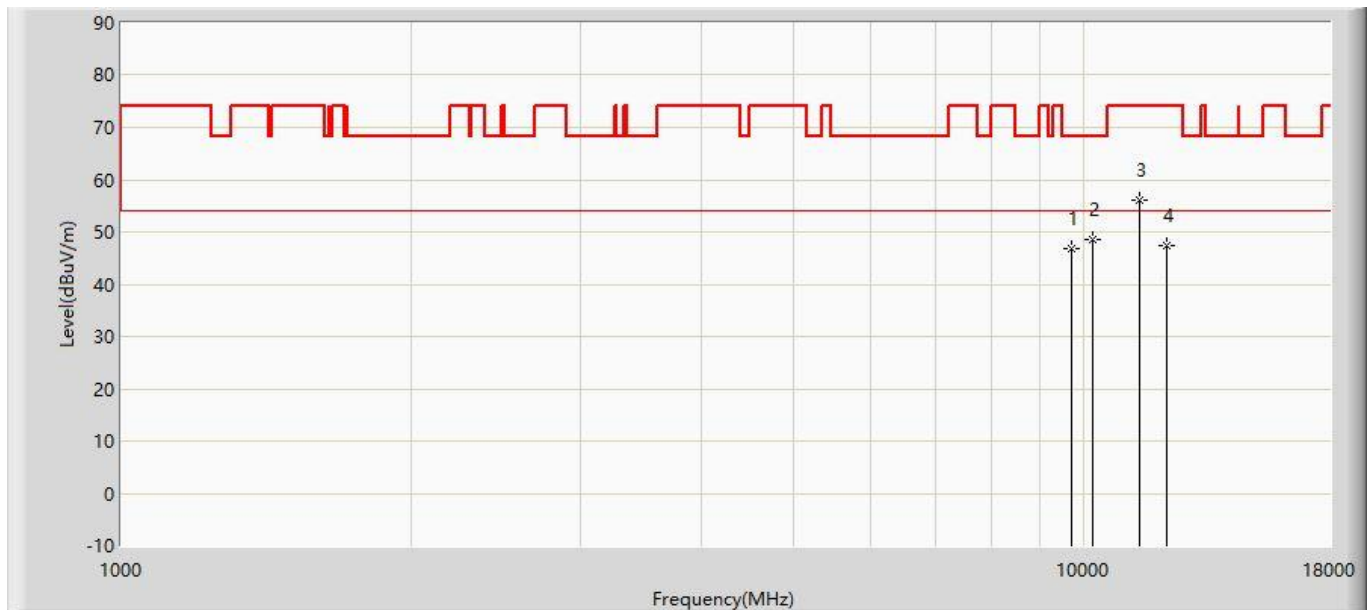


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	46.749	32.404	-21.451	68.200	14.345	PK
2			10214.000	48.634	32.685	-19.566	68.200	15.949	PK
3		*	11438.000	55.949	37.958	-18.051	74.000	17.991	PK
4			12169.000	47.451	29.635	-26.549	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz with OAW-AP1322	

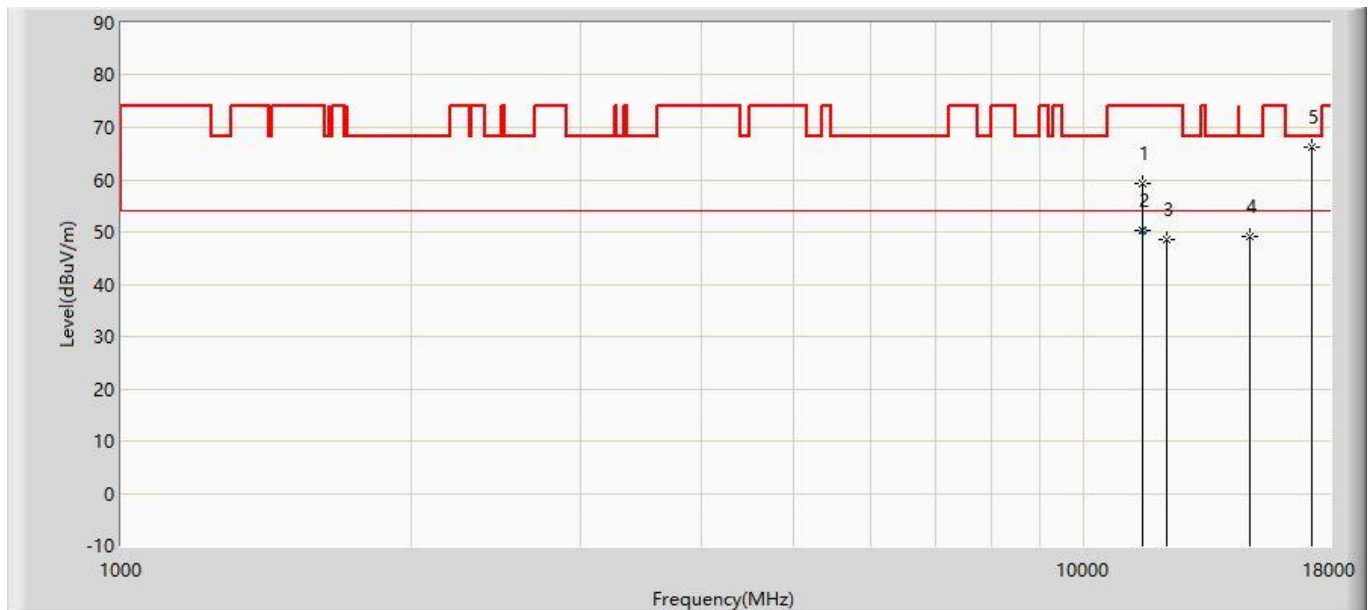


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	59.138	41.098	-14.862	74.000	18.040	PK
2			11498.320	50.378	32.334	-3.622	54.000	18.044	AV
3			12203.000	48.520	30.707	-25.480	74.000	17.813	PK
4			14872.000	49.219	28.464	-18.981	68.200	20.755	PK
5		*	17235.000	66.258	38.525	-1.942	68.200	27.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz with OAW-AP1322	

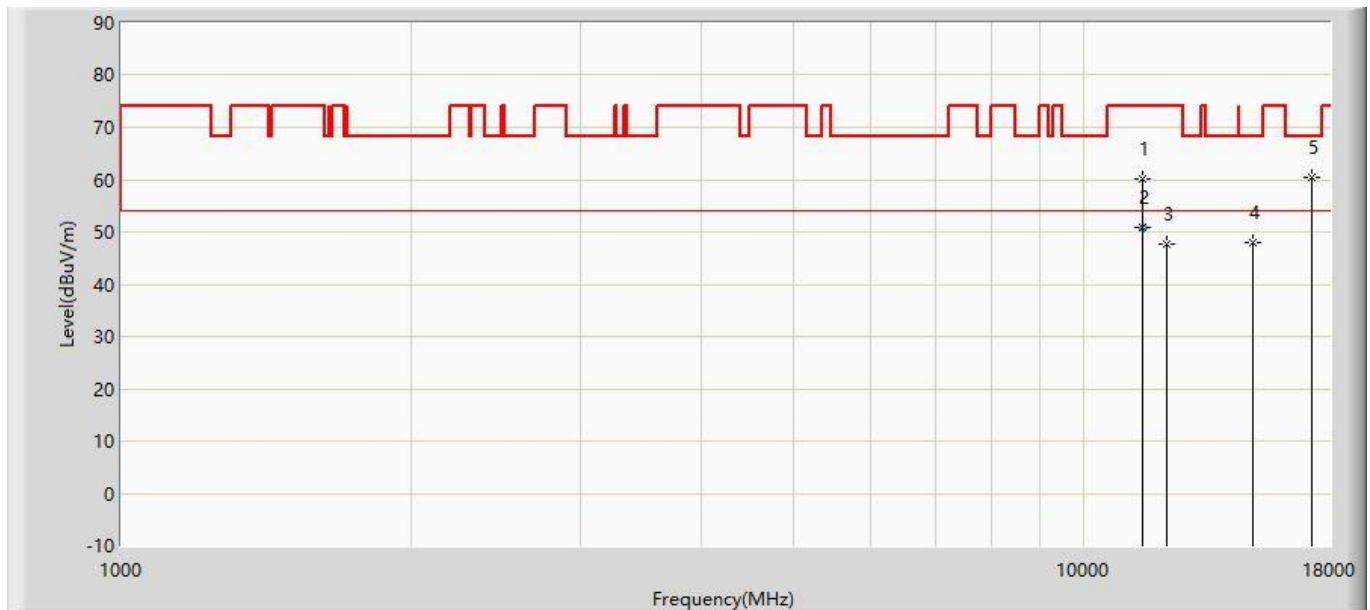


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	60.223	42.183	-13.777	74.000	18.040	PK
2		*	11490.170	50.728	32.688	-3.272	54.000	18.040	AV
3			12169.000	47.651	29.835	-26.349	74.000	17.816	PK
4			14957.000	48.000	27.222	-20.200	68.200	20.778	PK
5			17235.000	60.434	32.701	-7.766	68.200	27.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5785MHz with OAW-AP1322	

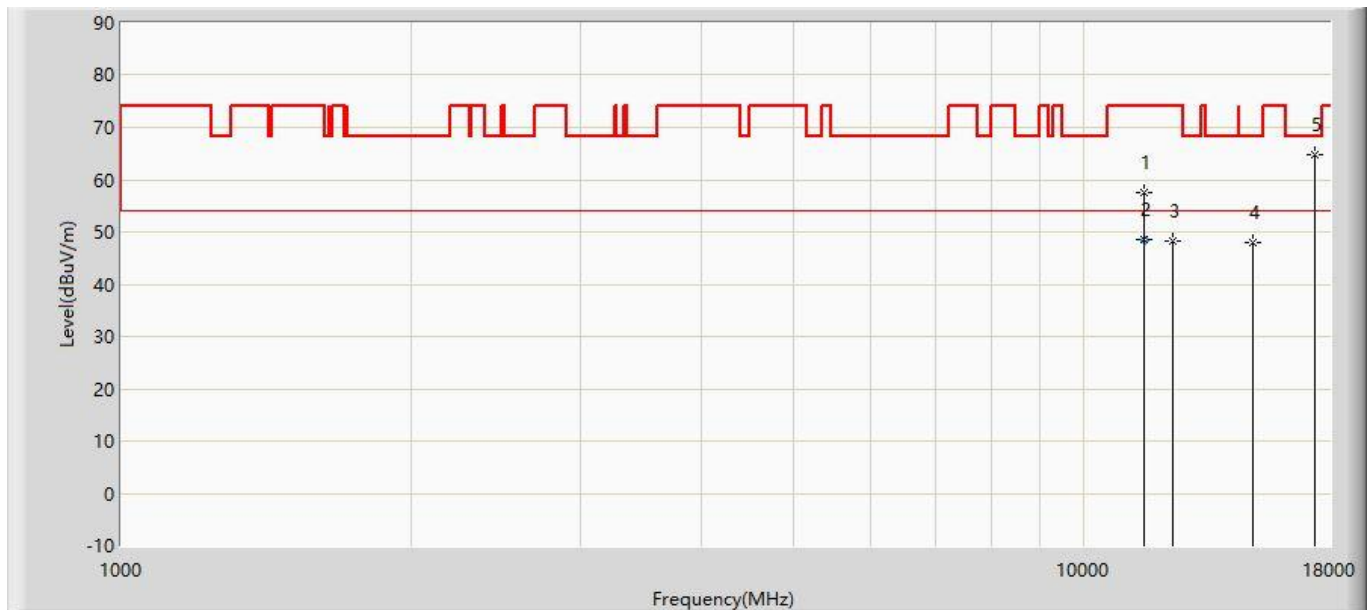


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11557.000	57.601	39.577	-16.399	74.000	18.024	PK
2			11557.900	48.556	30.533	-5.444	54.000	18.023	AV
3			12373.000	48.249	30.440	-25.751	74.000	17.809	PK
4			14957.000	47.996	27.218	-20.204	68.200	20.778	PK
5		*	17354.000	64.764	35.906	-3.436	68.200	28.858	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5785MHz with OAW-AP1322	

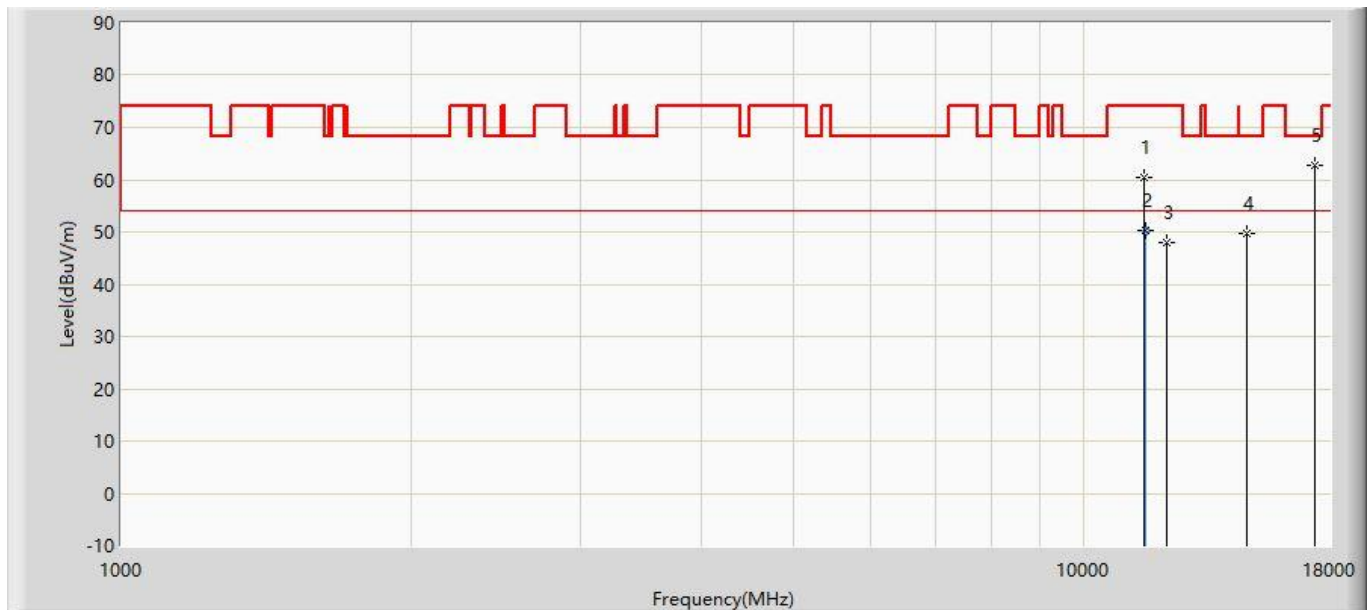


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11557.000	60.404	42.380	-13.596	74.000	18.024	PK
2		*	11562.800	50.148	32.127	-3.852	54.000	18.021	AV
3			12169.000	47.971	30.155	-26.029	74.000	17.816	PK
4			14753.000	49.828	29.104	-18.372	68.200	20.724	PK
5			17354.000	62.675	33.817	-5.525	68.200	28.858	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz with OAW-AP1322	

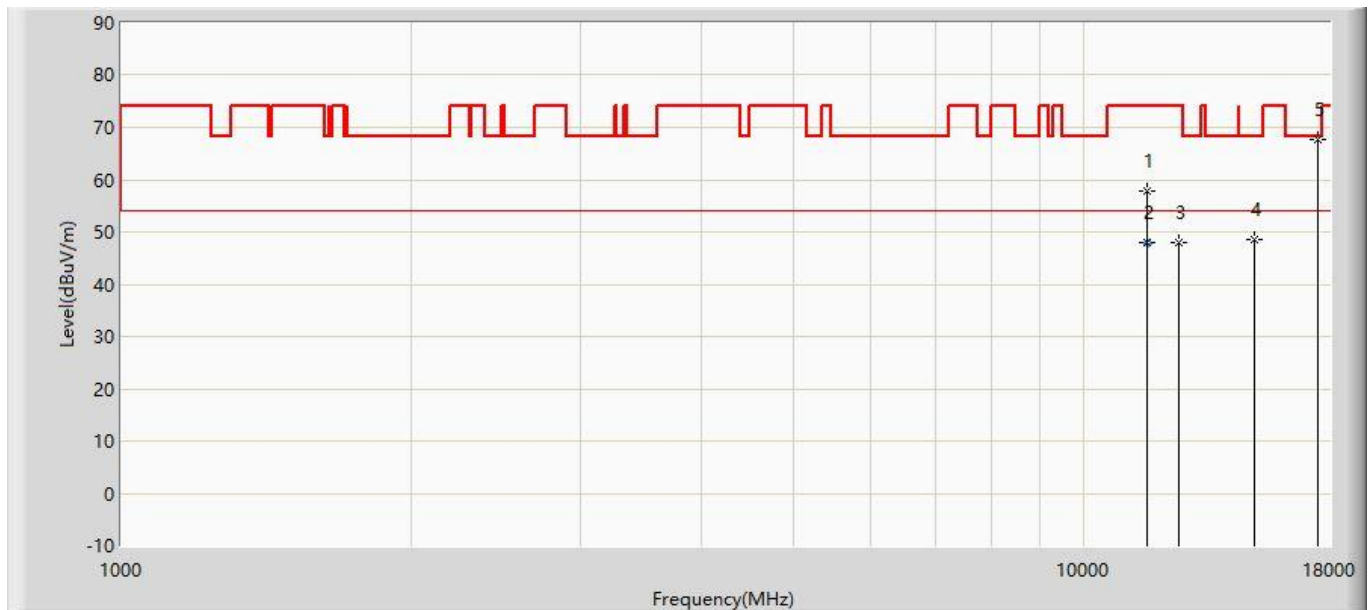


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11642.000	57.846	39.861	-16.154	74.000	17.985	PK
2			11642.800	47.880	29.896	-6.120	54.000	17.984	AV
3			12543.000	48.106	30.191	-25.894	74.000	17.915	PK
4			15025.000	48.585	27.787	-19.615	68.200	20.798	PK
5		*	17473.000	67.754	37.769	-0.446	68.200	29.985	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz with OAW-AP1322	

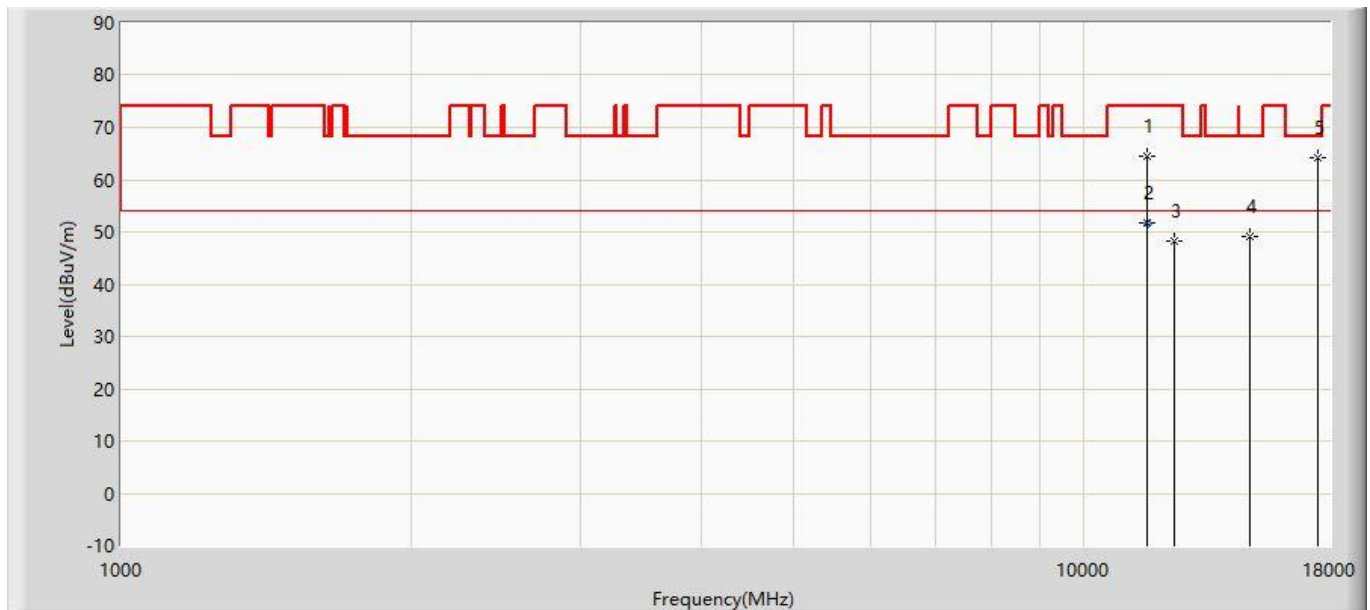


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11642.000	64.511	46.526	-9.489	74.000	17.985	PK
2		*	11644.350	51.597	33.613	-2.403	54.000	17.984	AV
3			12390.000	48.345	30.537	-25.655	74.000	17.808	PK
4			14855.000	49.010	28.259	-19.190	68.200	20.751	PK
5			17473.000	64.238	34.253	-3.962	68.200	29.985	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz with OAW-AP1322	

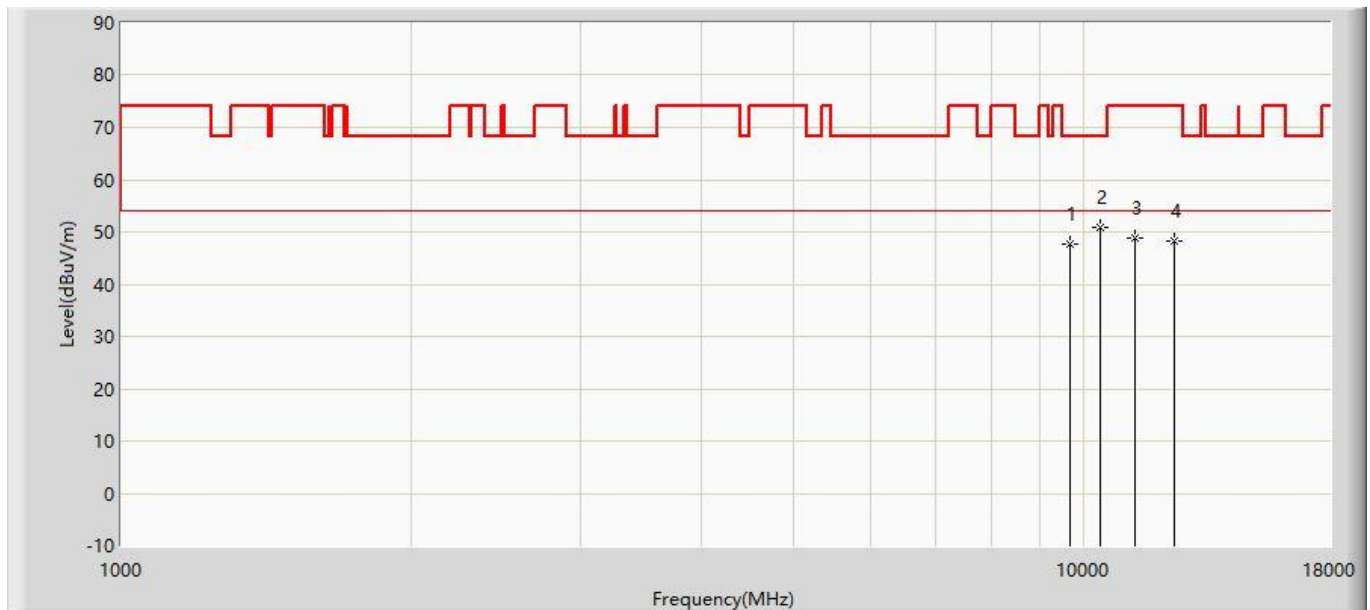


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9653.000	47.651	33.529	-20.549	68.200	14.122	PK
2		*	10384.000	51.006	34.510	-17.194	68.200	16.496	PK
3			11285.000	48.879	31.032	-25.121	74.000	17.847	PK
4			12390.000	48.345	30.537	-25.655	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz with OAW-AP1322	

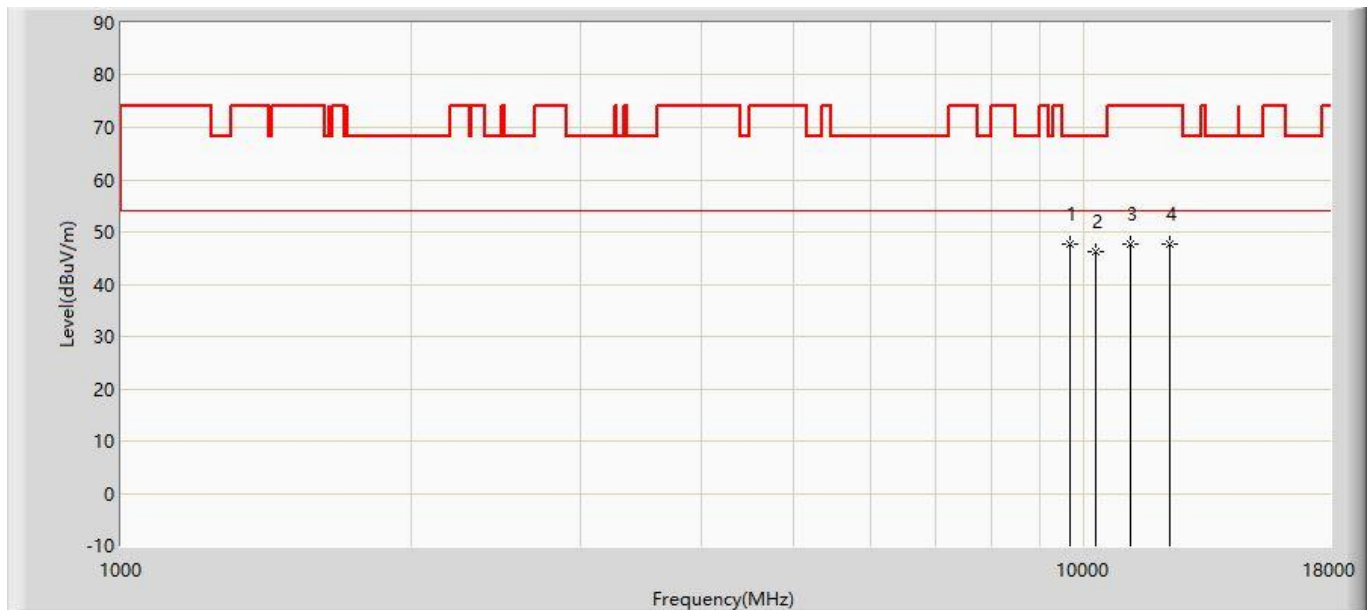


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9653.000	47.651	33.529	-20.549	68.200	14.122	PK
2			10265.000	46.239	30.126	-21.961	68.200	16.113	PK
3			11183.000	47.658	29.906	-26.342	74.000	17.752	PK
4			12271.000	47.650	29.839	-26.350	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5230MHz with OAW-AP1322	

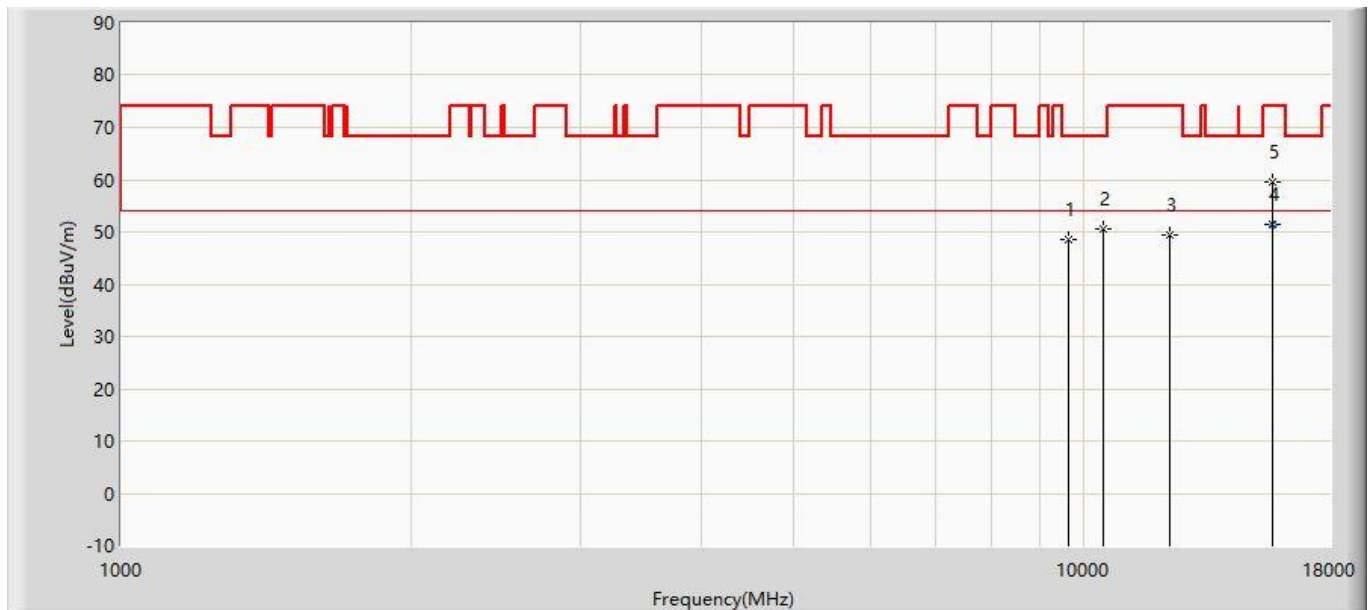


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9636.000	48.496	34.430	-19.704	68.200	14.066	PK
2			10469.000	50.494	33.724	-17.706	68.200	16.770	PK
3			12288.000	49.391	31.580	-24.609	74.000	17.811	PK
4		*	15692.200	51.519	30.738	-2.481	54.000	20.781	AV
5			15705.000	59.642	38.873	-14.358	74.000	20.769	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5230MHz with OAW-AP1322	

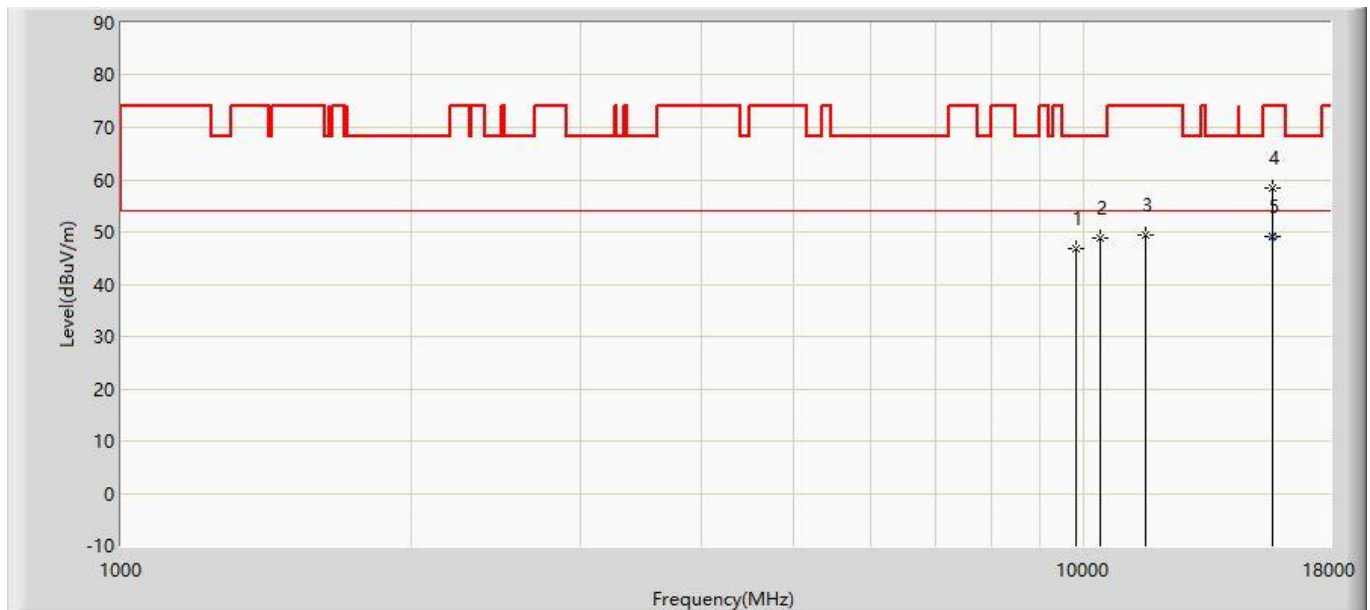


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9823.000	46.912	32.232	-21.288	68.200	14.680	PK
2			10401.000	48.809	32.258	-19.391	68.200	16.551	PK
3			11574.000	49.527	31.511	-24.473	74.000	18.016	PK
4			15671.000	58.349	37.550	-15.651	74.000	20.799	PK
5		*	15671.200	49.176	28.377	-4.824	54.000	20.800	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5270MHz with OAW-AP1322	

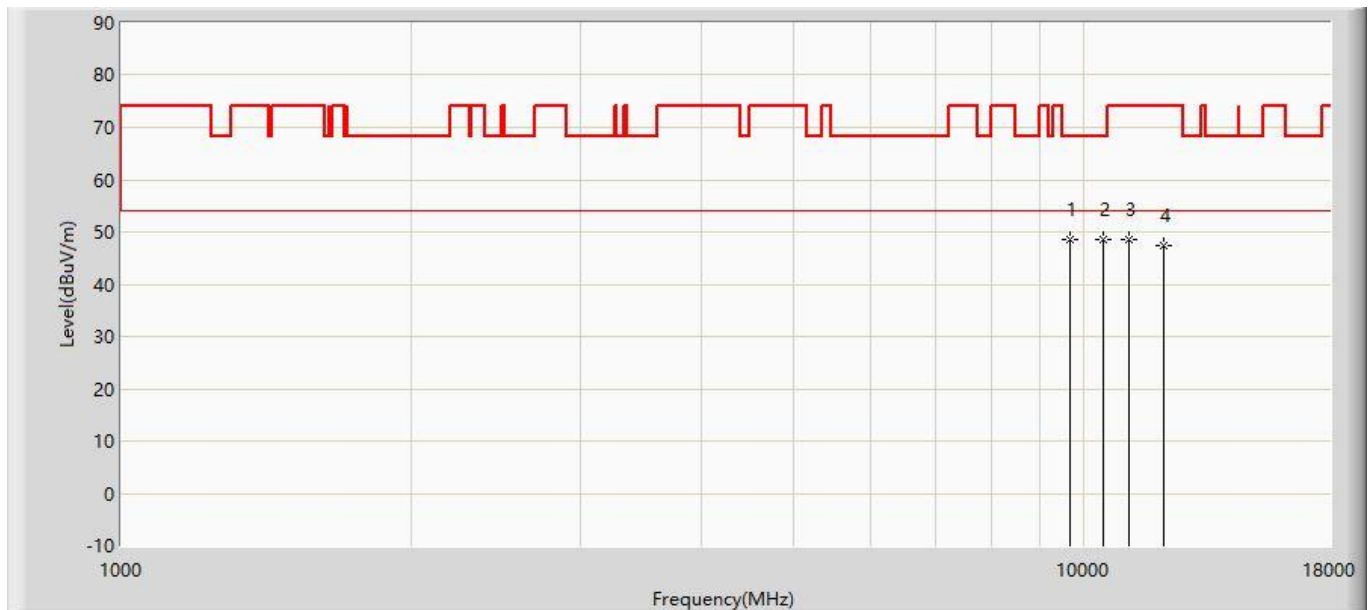


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9670.000	48.455	34.277	-19.745	68.200	14.178	PK
2			10452.000	48.438	31.723	-19.762	68.200	16.715	PK
3			11132.000	48.498	30.794	-25.502	74.000	17.704	PK
4			12118.000	47.503	29.687	-26.497	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5270MHz with OAW-AP1322	

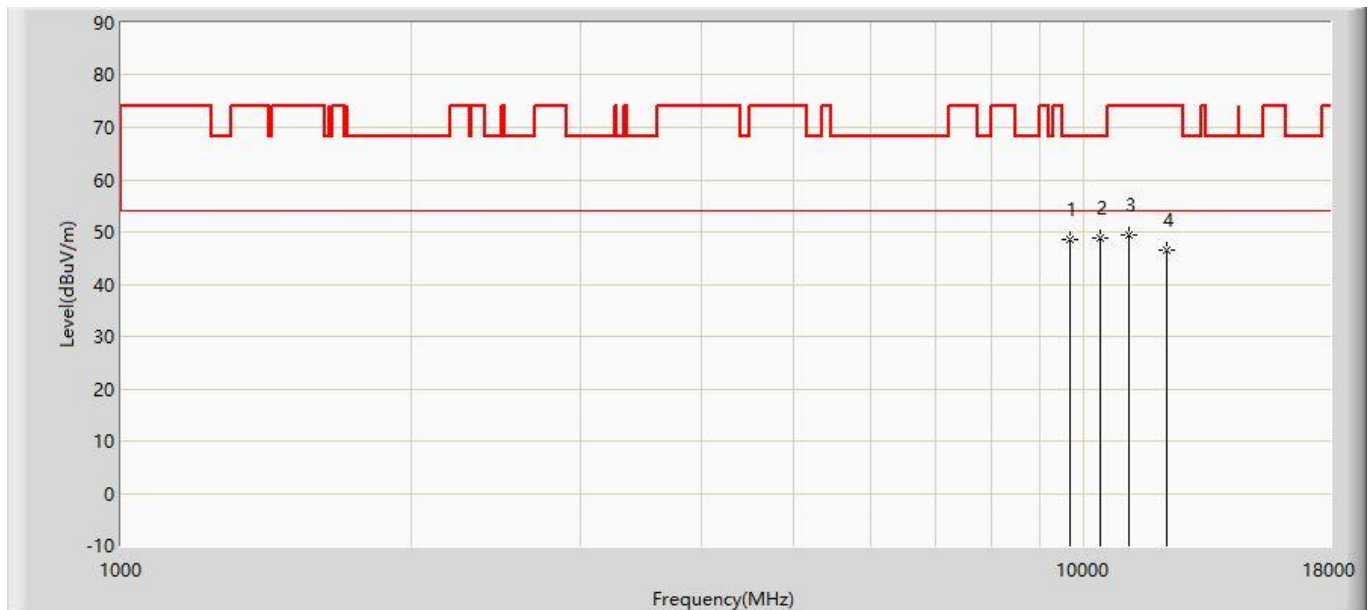


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9670.000	48.455	34.277	-19.745	68.200	14.178	PK
2		*	10384.000	48.853	32.357	-19.347	68.200	16.496	PK
3			11149.000	49.455	31.735	-24.545	74.000	17.720	PK
4			12169.000	46.504	28.688	-27.496	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz with OAW-AP1322	

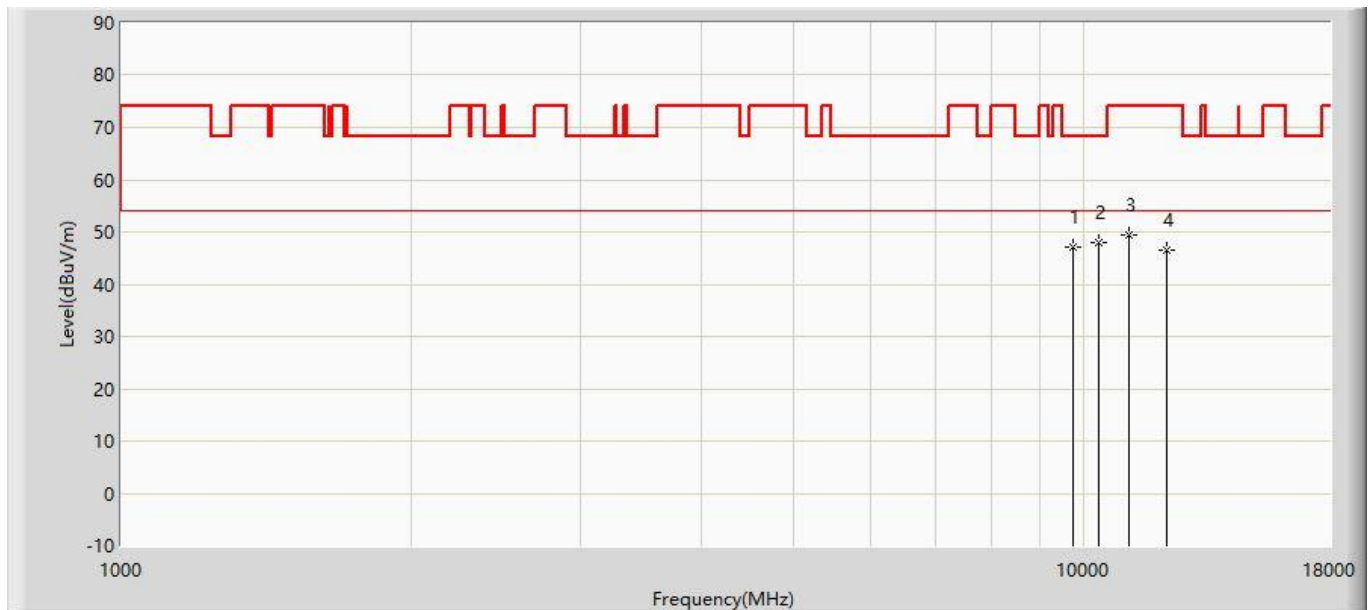


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9755.000	47.019	32.563	-21.181	68.200	14.456	PK
2		*	10367.000	48.092	31.651	-20.108	68.200	16.441	PK
3			11115.000	49.382	31.694	-24.618	74.000	17.688	PK
4			12169.000	46.504	28.688	-27.496	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz with OAW-AP1322	

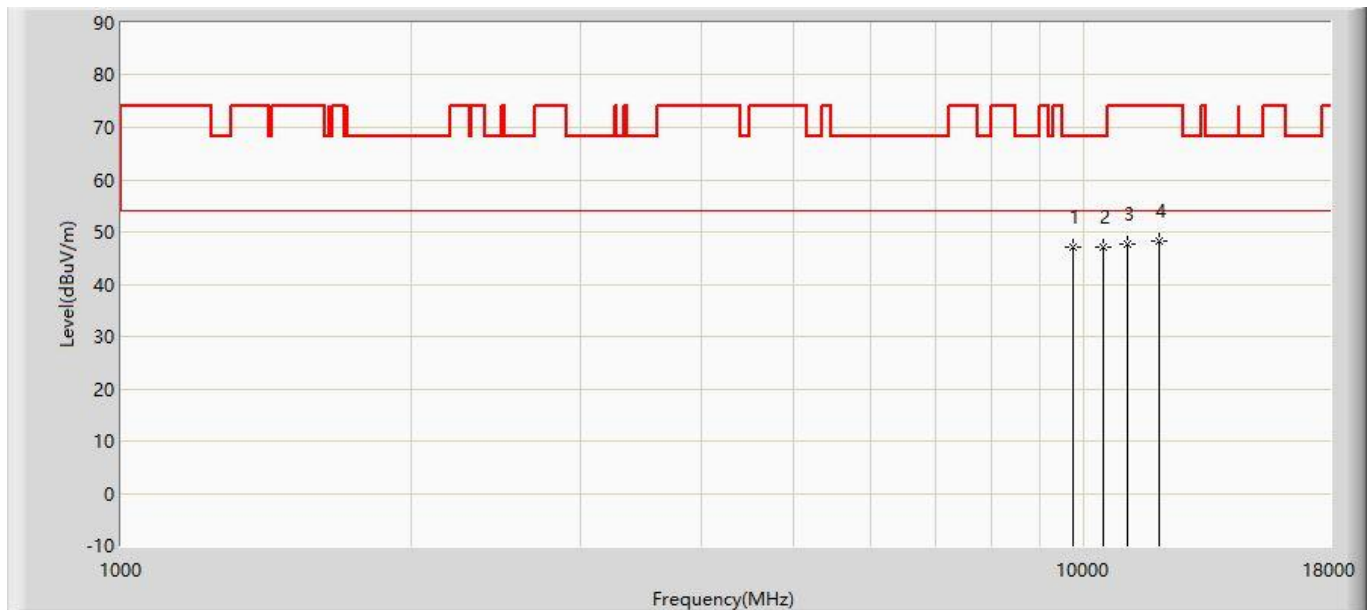


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9755.000	47.019	32.563	-21.181	68.200	14.456	PK
2		*	10452.000	47.143	30.428	-21.057	68.200	16.715	PK
3			11081.000	47.737	30.081	-26.263	74.000	17.656	PK
4			11982.000	48.291	30.462	-25.709	74.000	17.829	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz with OAW-AP1322	

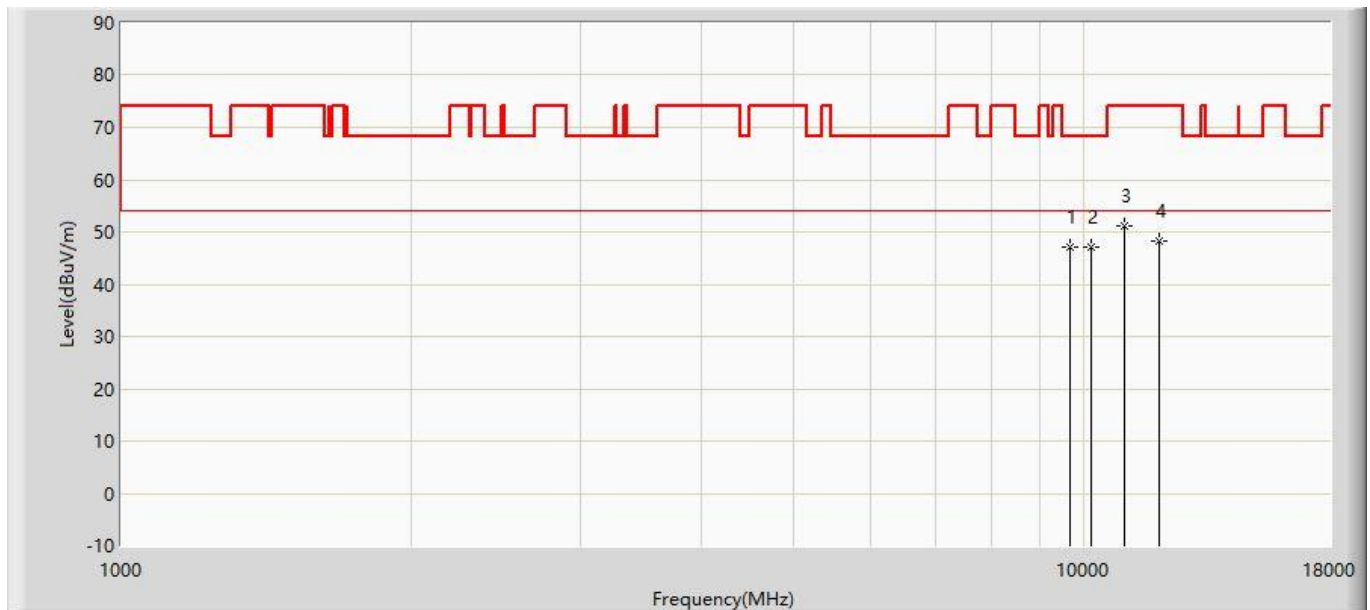


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9653.000	47.102	32.980	-21.098	68.200	14.122	PK
2			10180.000	46.989	31.149	-21.211	68.200	15.840	PK
3			11013.000	51.186	33.594	-22.814	74.000	17.592	PK
4			11982.000	48.291	30.462	-25.709	74.000	17.829	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz with OAW-AP1322	

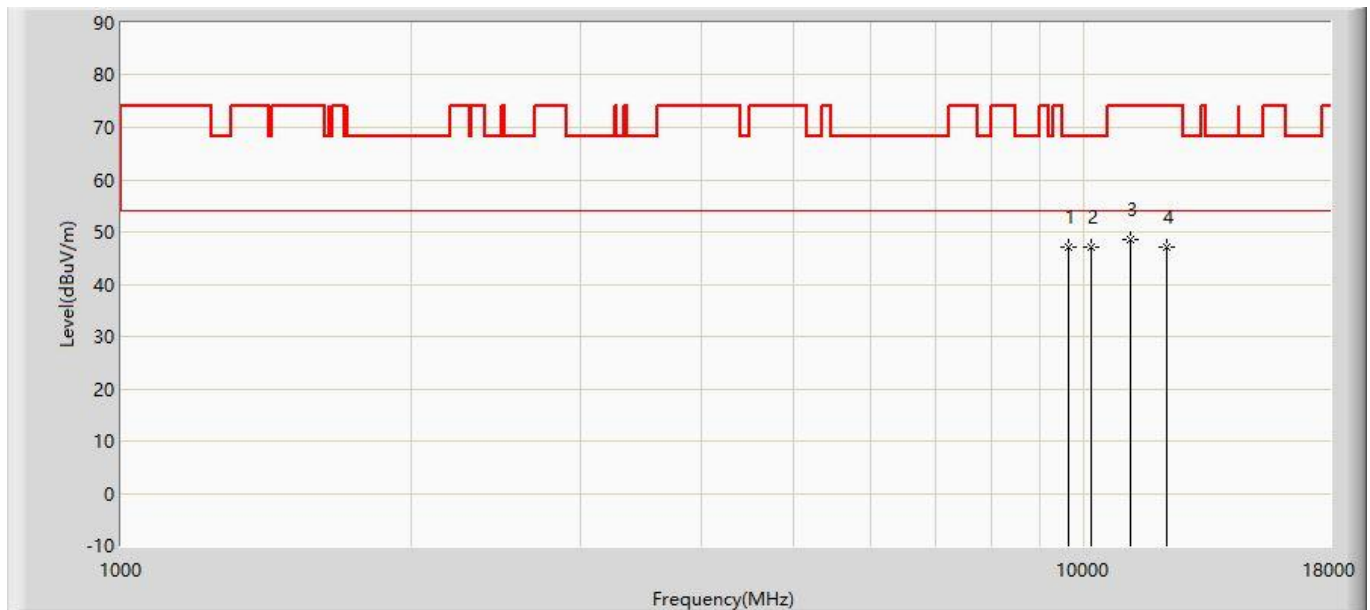


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9636.000	47.245	33.179	-20.955	68.200	14.066	PK
2			10180.000	46.989	31.149	-21.211	68.200	15.840	PK
3			11183.000	48.564	30.812	-25.436	74.000	17.752	PK
4			12169.000	47.038	29.222	-26.962	74.000	17.816	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5590MHz with OAW-AP1322	

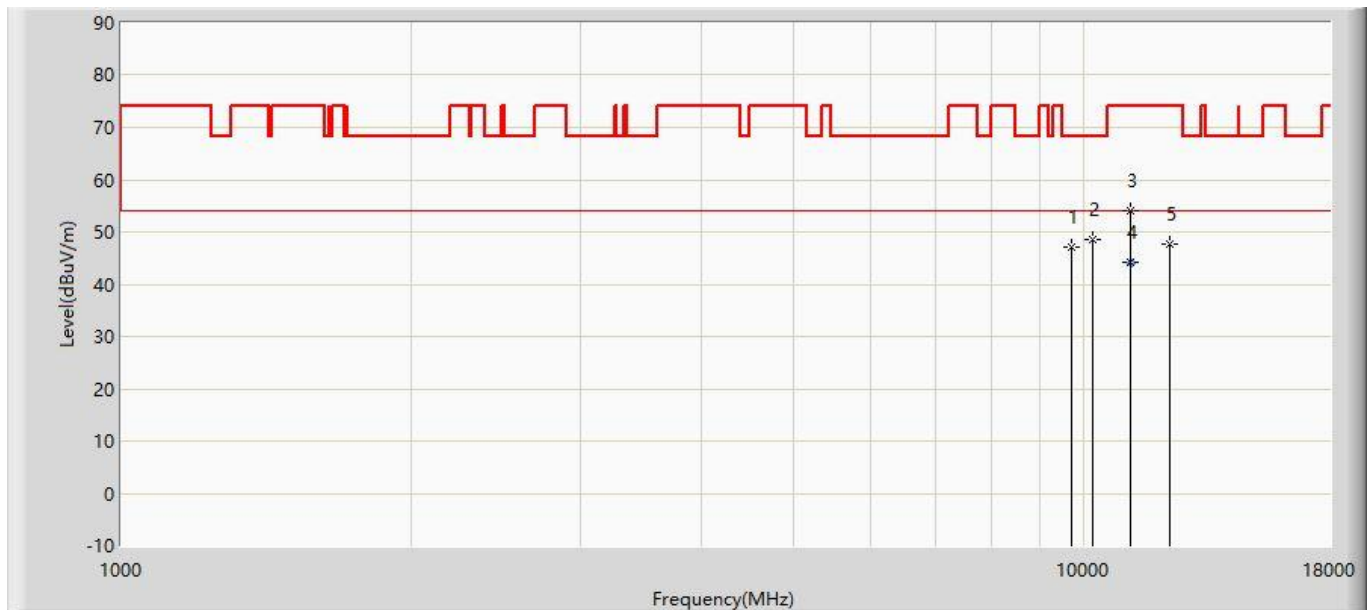


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	47.173	32.828	-21.027	68.200	14.345	PK
2			10214.000	48.440	32.491	-19.760	68.200	15.949	PK
3			11183.000	53.922	36.170	-20.078	74.000	17.752	PK
4		*	11183.500	44.198	26.446	-9.802	54.000	17.753	AV
5			12288.000	47.683	29.872	-26.317	74.000	17.811	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5590MHz with OAW-AP1322	

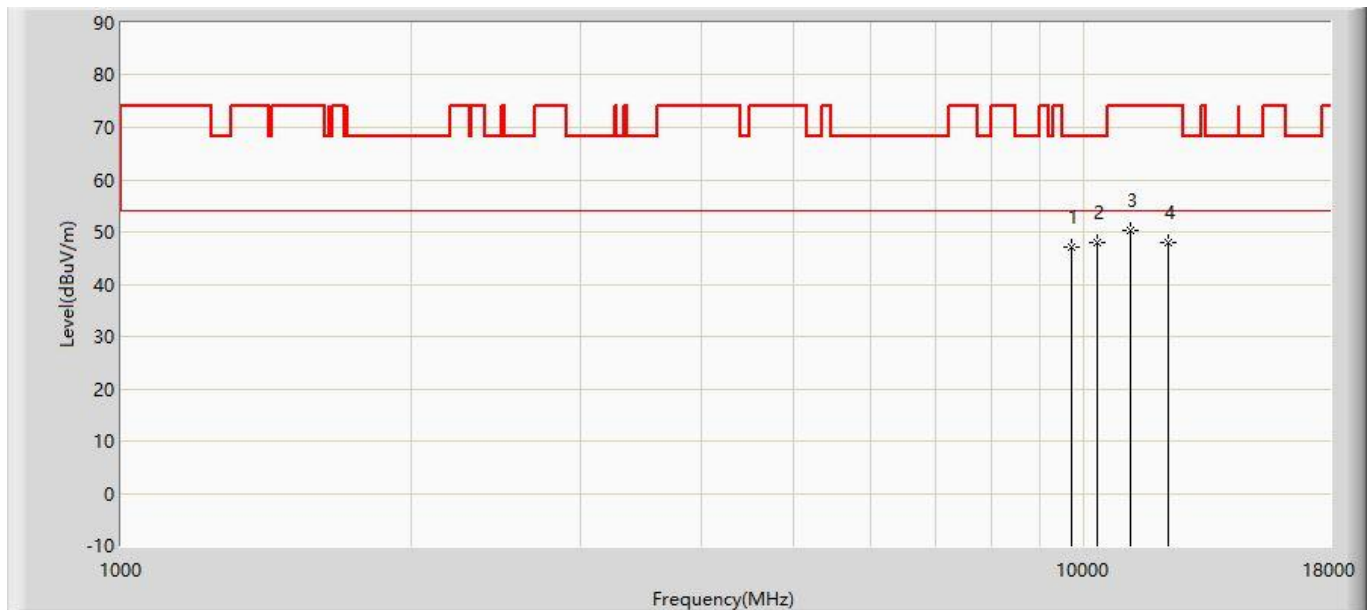


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	47.173	32.828	-21.027	68.200	14.345	PK
2		*	10316.000	47.952	31.674	-20.248	68.200	16.278	PK
3			11183.000	50.369	32.617	-23.631	74.000	17.752	PK
4			12237.000	48.081	30.268	-25.919	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz with OAW-AP1322	

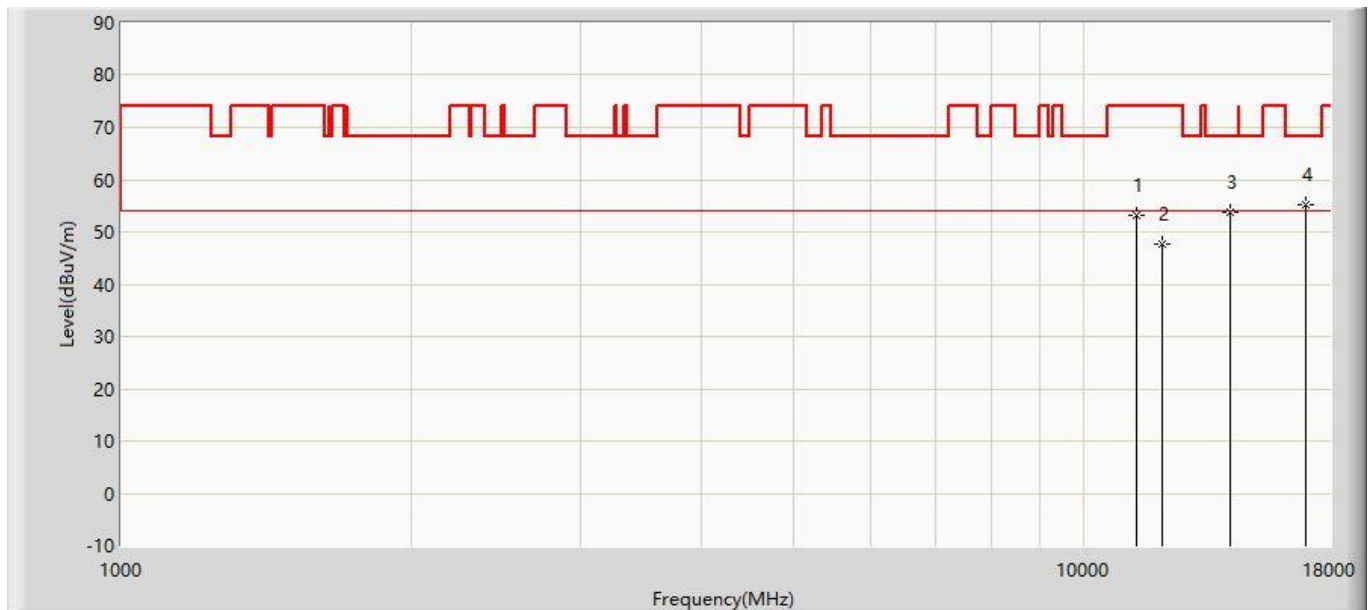


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11336.000	53.285	35.389	-20.715	74.000	17.896	PK
2			12067.000	47.677	29.859	-26.323	74.000	17.818	PK
3			14158.000	53.751	32.847	-14.449	68.200	20.904	PK
4		*	17014.000	55.126	29.484	-13.074	68.200	25.642	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz with OAW-AP1322	

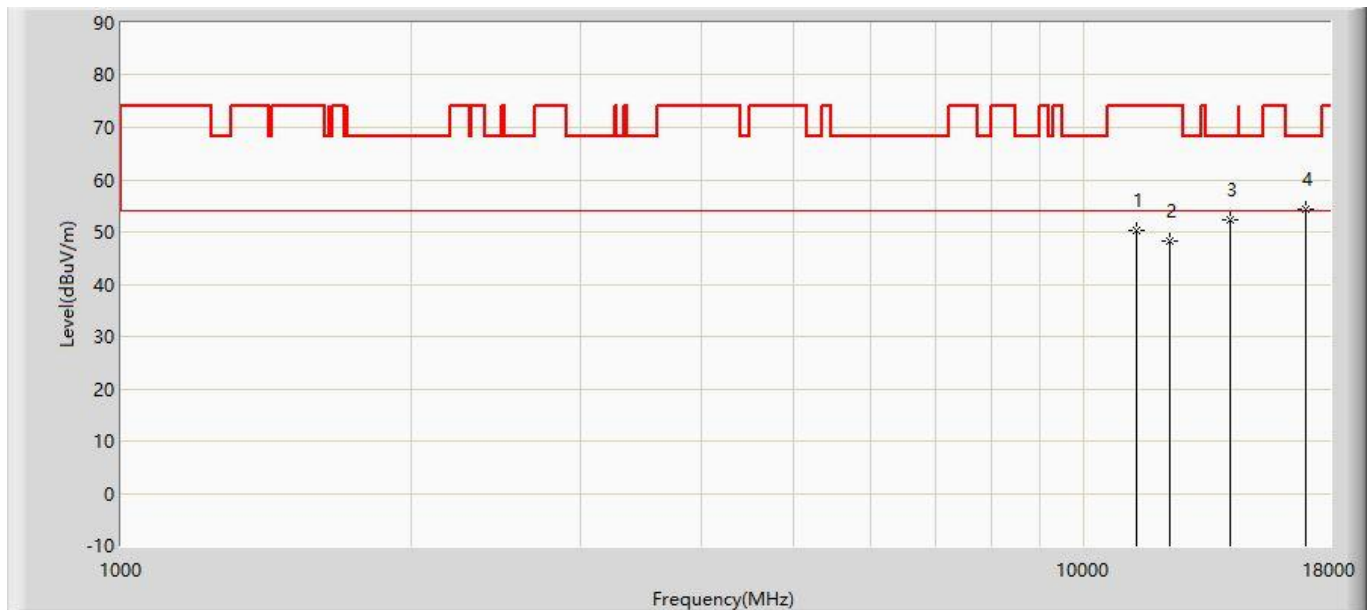


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11336.000	50.342	32.446	-23.658	74.000	17.896	PK
2			12271.000	48.390	30.579	-25.610	74.000	17.811	PK
3			14158.000	52.325	31.421	-15.875	68.200	20.904	PK
4		*	16997.000	54.261	28.772	-13.939	68.200	25.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5710MHz with OAW-AP1322	

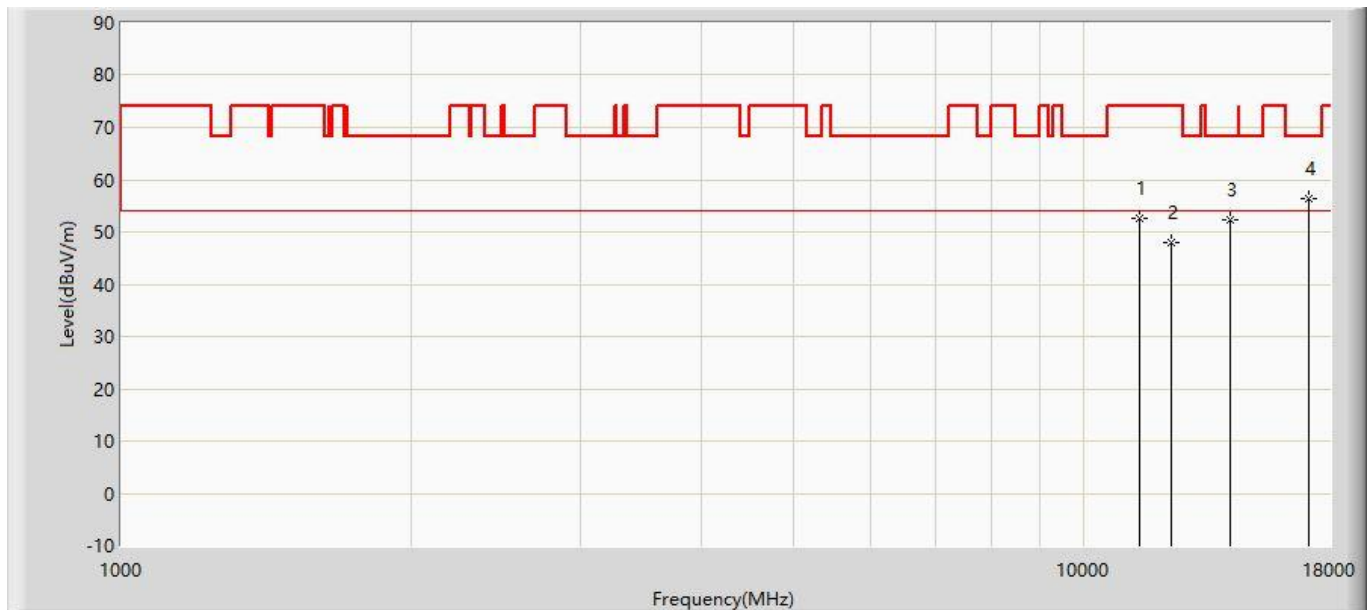


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11421.000	52.686	34.711	-21.314	74.000	17.975	PK
2			12339.000	47.847	30.037	-26.153	74.000	17.810	PK
3			14158.000	52.303	31.399	-15.897	68.200	20.904	PK
4		*	17133.000	56.268	29.500	-11.932	68.200	26.768	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5710MHz with OAW-AP1322	

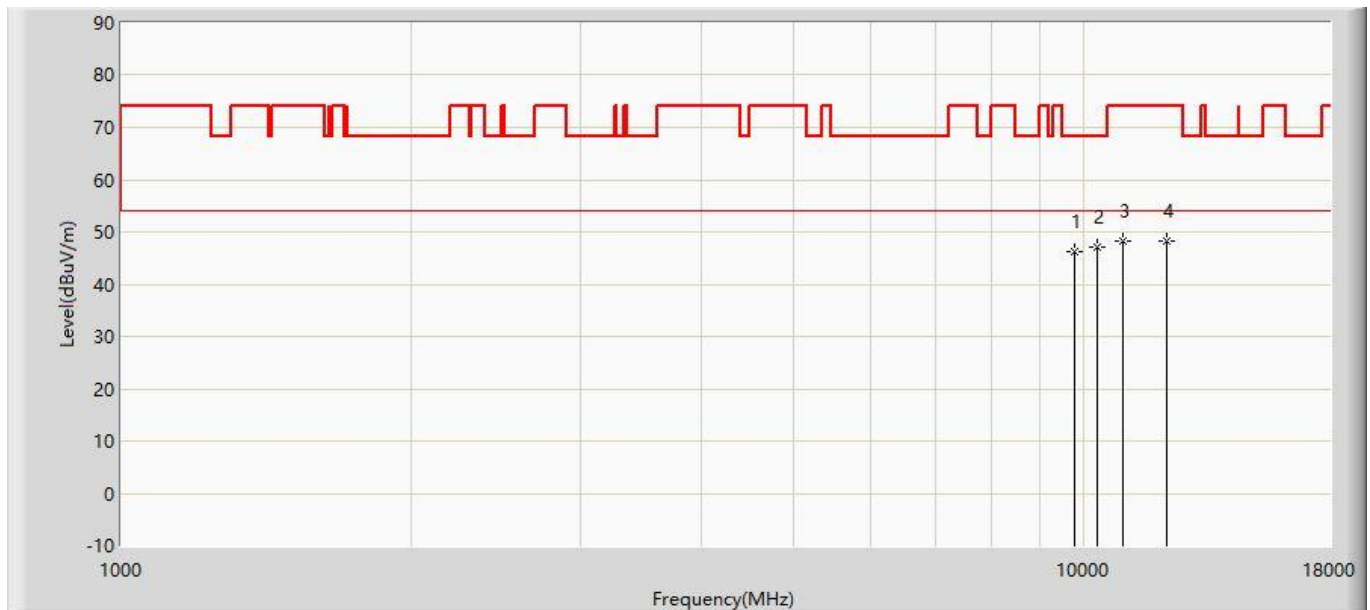


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.273	31.761	-21.927	68.200	14.512	PK
2		*	10316.000	47.119	30.841	-21.081	68.200	16.278	PK
3			10962.000	48.334	30.808	-25.666	74.000	17.526	PK
4			12203.000	48.257	30.444	-25.743	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz with OAW-AP1322	

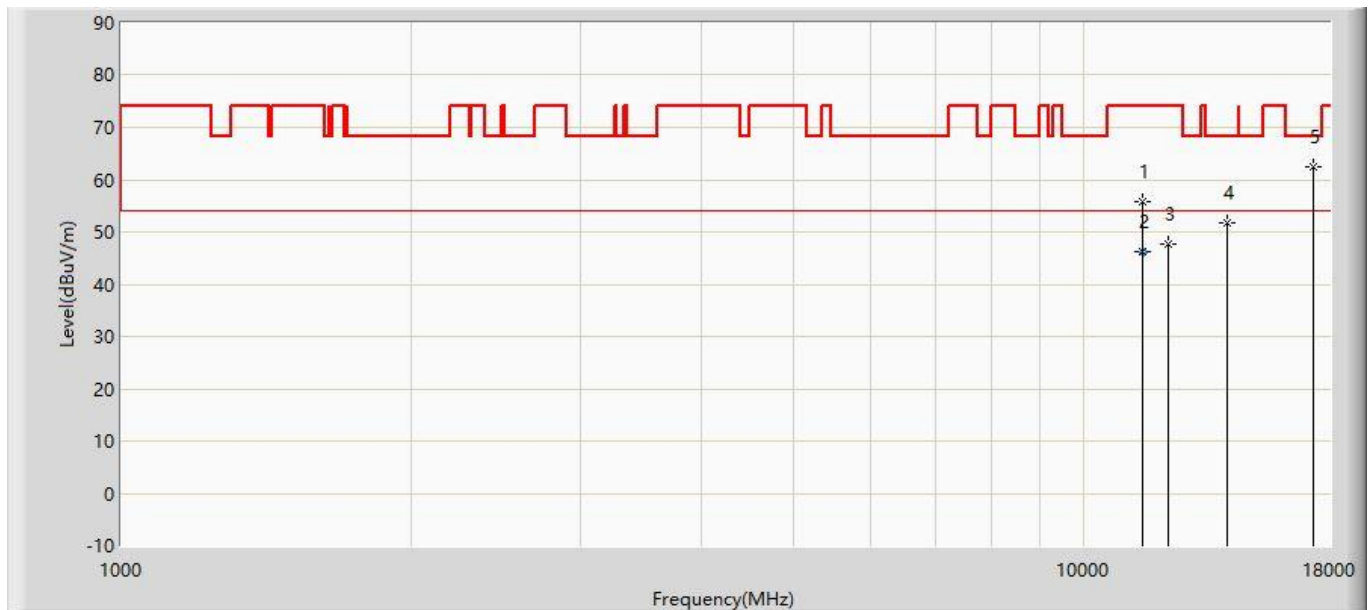


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11506.000	55.669	37.622	-18.331	74.000	18.047	PK
2			11506.800	46.376	28.329	-7.624	54.000	18.047	AV
3			12220.000	47.667	29.853	-26.333	74.000	17.814	PK
4			14056.000	51.663	30.685	-16.537	68.200	20.978	PK
5		*	17269.000	62.365	34.311	-5.835	68.200	28.054	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz with OAW-AP1322	

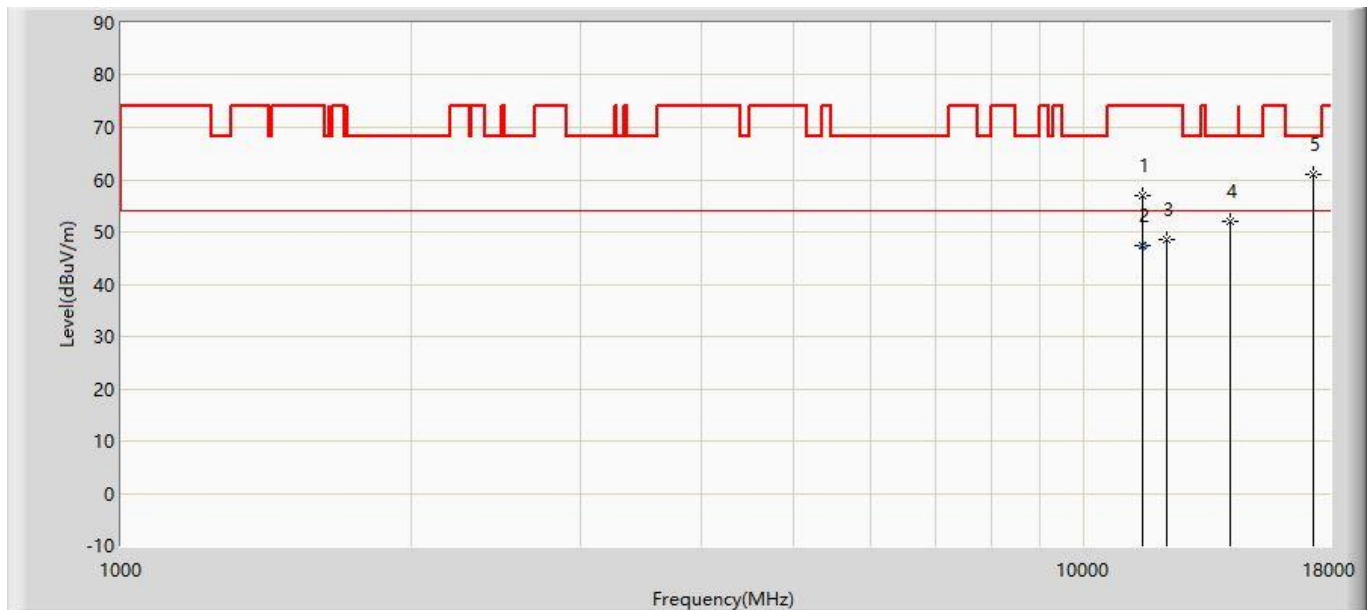


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11506.000	56.875	38.828	-17.125	74.000	18.047	PK
2		*	11506.300	47.426	29.379	-6.574	54.000	18.047	AV
3			12203.000	48.463	30.650	-25.537	74.000	17.813	PK
4			14175.000	51.969	31.077	-16.231	68.200	20.892	PK
5			17269.000	60.899	32.845	-7.301	68.200	28.054	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz with OAW-AP1322	

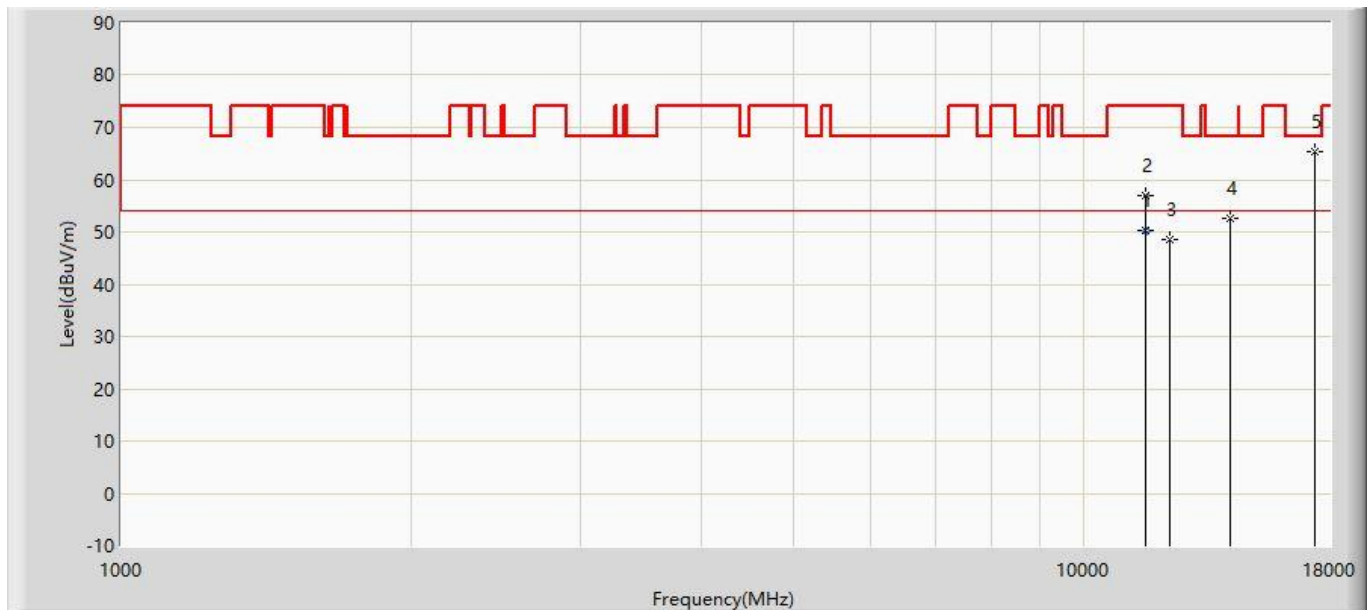


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11590.190	50.290	32.281	-3.710	54.000	18.009	AV
2			11591.000	57.034	39.026	-16.966	74.000	18.008	PK
3			12271.000	48.496	30.685	-25.504	74.000	17.811	PK
4			14175.000	52.659	31.767	-15.541	68.200	20.892	PK
5		*	17371.000	65.299	36.279	-2.901	68.200	29.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz with OAW-AP1322	

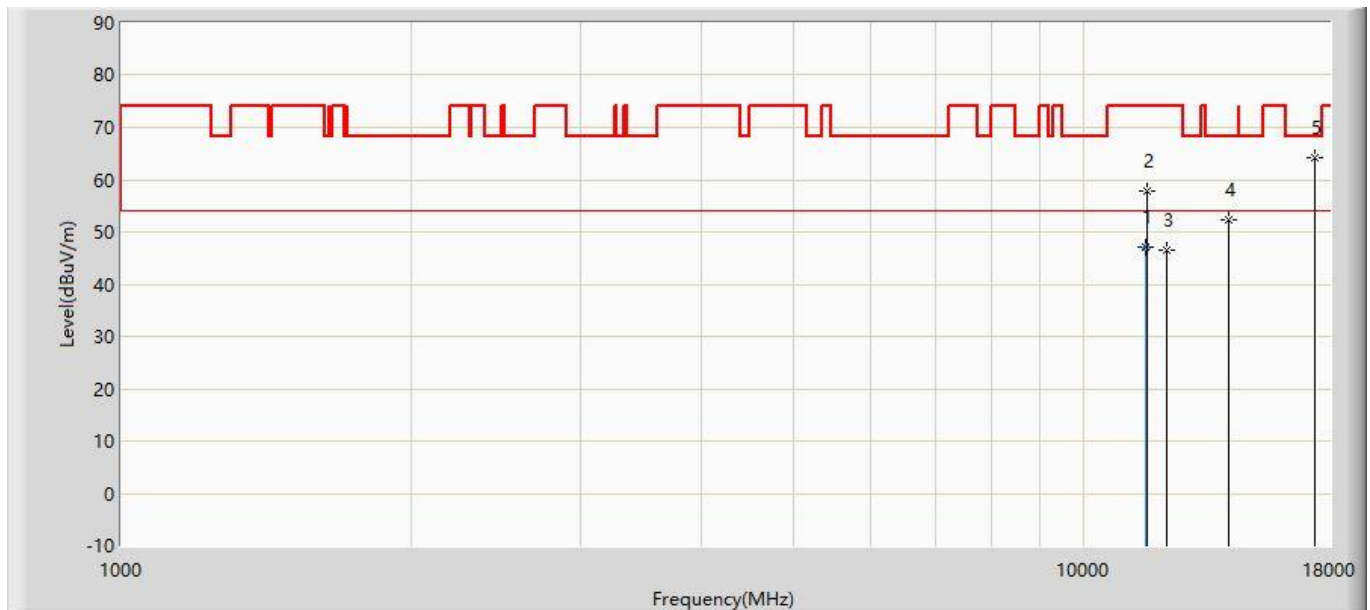


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11602.090	47.153	29.150	-6.847	54.000	18.003	AV
2			11608.000	57.727	39.727	-16.273	74.000	18.000	PK
3			12169.000	46.599	28.783	-27.401	74.000	17.816	PK
4			14141.000	52.312	31.396	-15.888	68.200	20.916	PK
5		*	17371.000	64.281	35.261	-3.919	68.200	29.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz with OAW-AP1322	

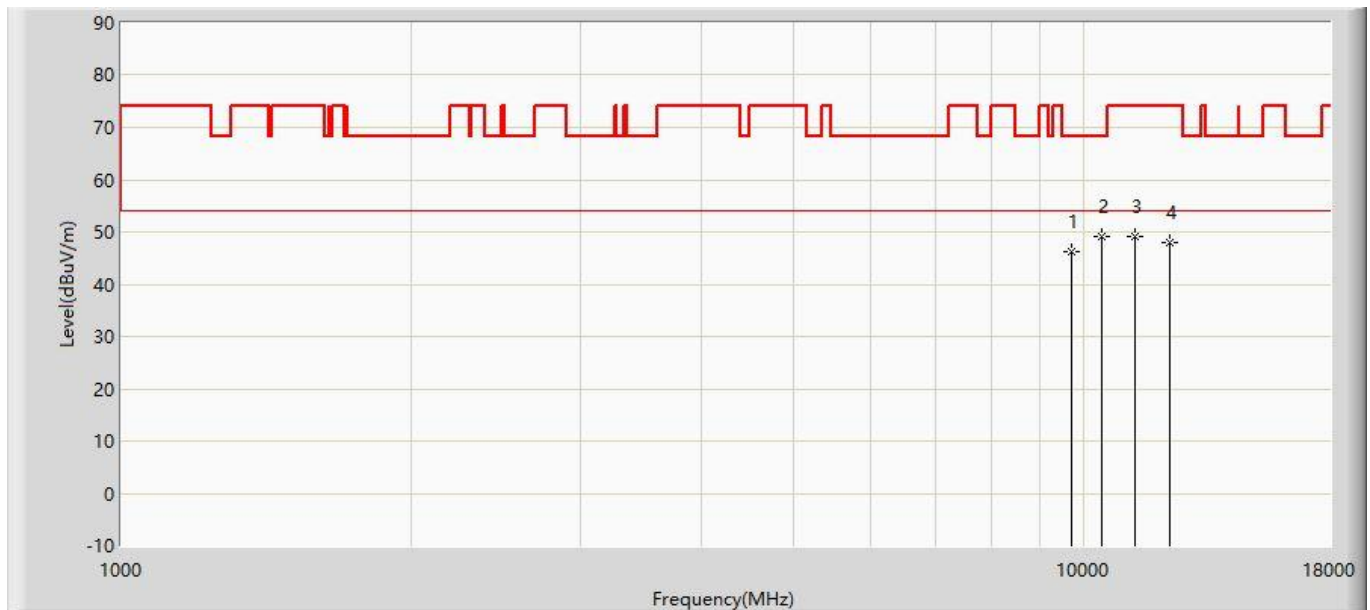


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	46.282	31.937	-21.918	68.200	14.345	PK
2		*	10418.000	48.990	32.384	-19.210	68.200	16.606	PK
3			11285.000	49.210	31.363	-24.790	74.000	17.847	PK
4			12288.000	48.075	30.264	-25.925	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz with OAW-AP1322	

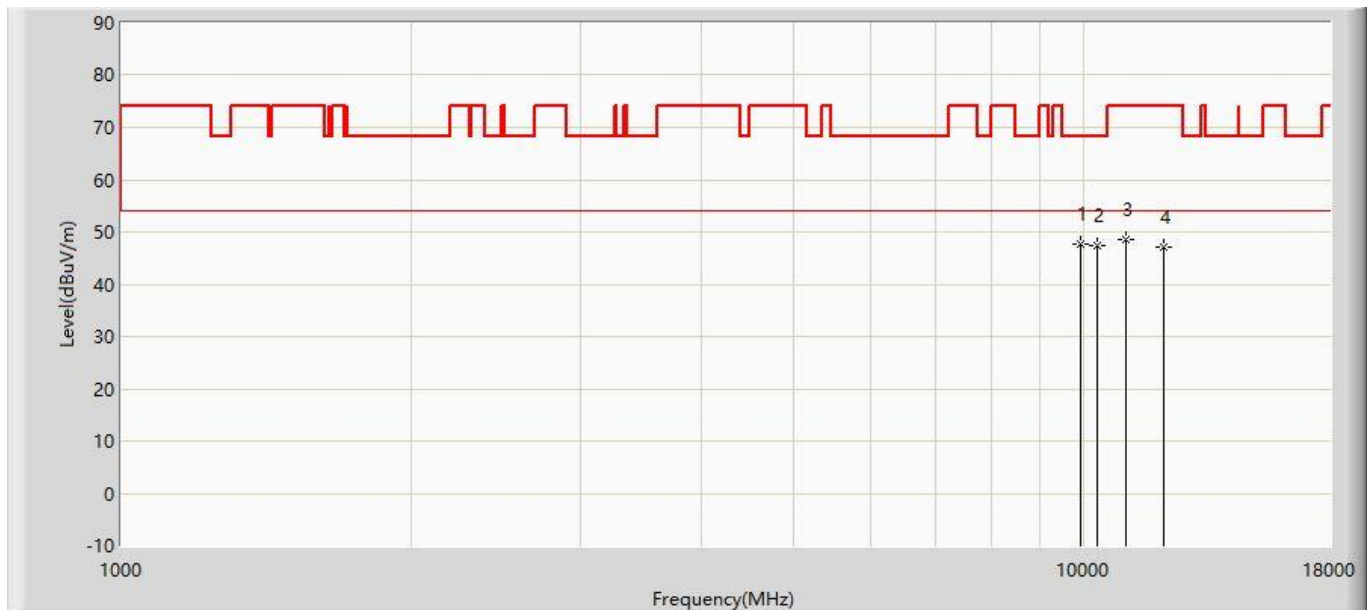


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9925.000	47.669	32.655	-20.531	68.200	15.014	PK
2			10333.000	47.366	31.033	-20.834	68.200	16.333	PK
3			11047.000	48.652	31.028	-25.348	74.000	17.624	PK
4			12084.000	46.974	29.156	-27.026	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with OAW-AP1322	

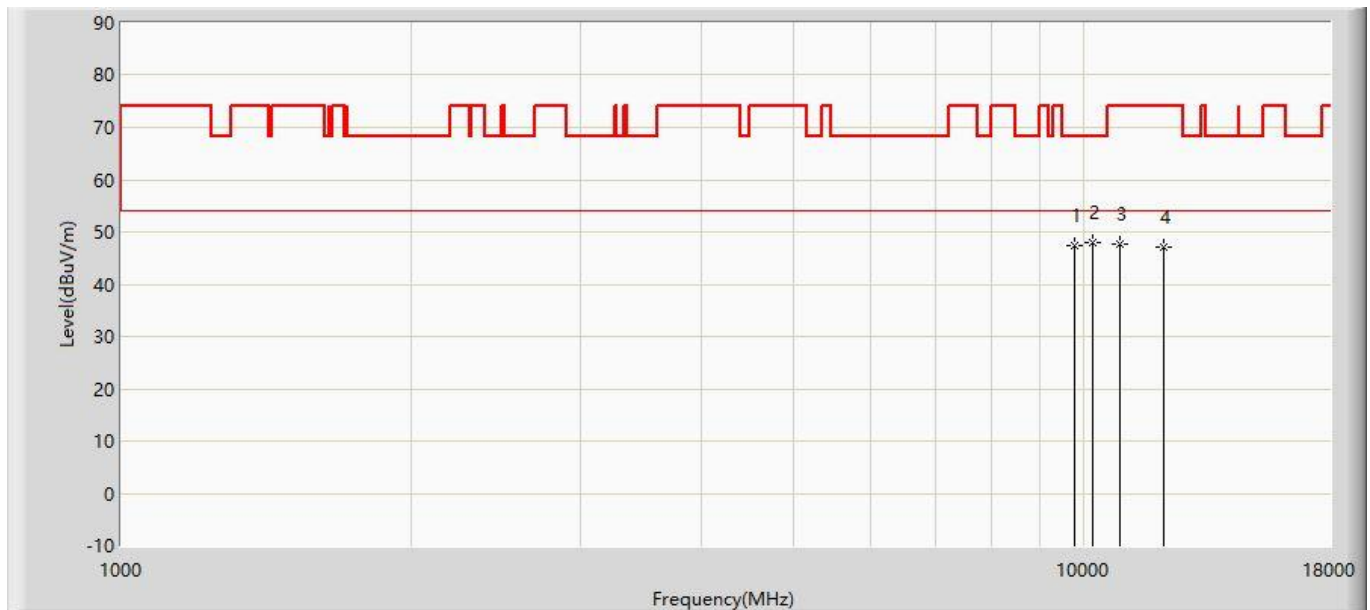


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	47.402	32.890	-20.798	68.200	14.512	PK
2		*	10214.000	47.993	32.044	-20.207	68.200	15.949	PK
3			10877.000	47.746	30.340	-26.254	74.000	17.406	PK
4			12084.000	46.974	29.156	-27.026	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with OAW-AP1322	

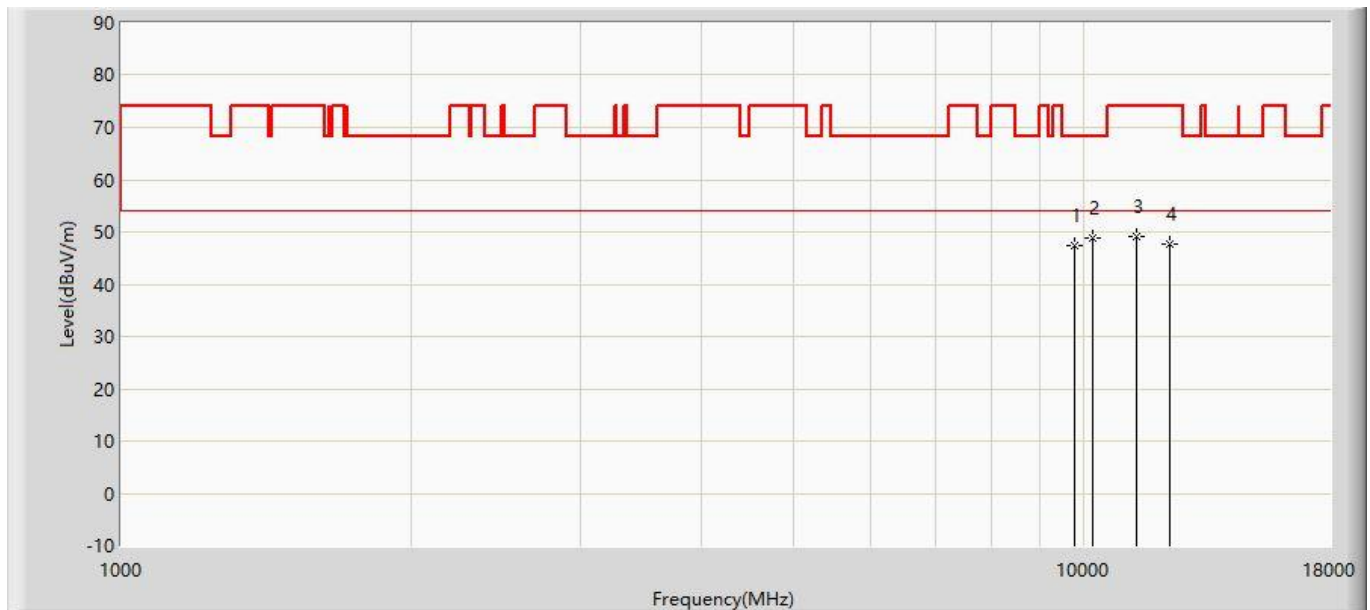


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	47.402	32.890	-20.798	68.200	14.512	PK
2		*	10214.000	48.800	32.851	-19.400	68.200	15.949	PK
3			11319.000	49.200	31.320	-24.800	74.000	17.880	PK
4			12271.000	47.557	29.746	-26.443	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with OAW-AP1322	

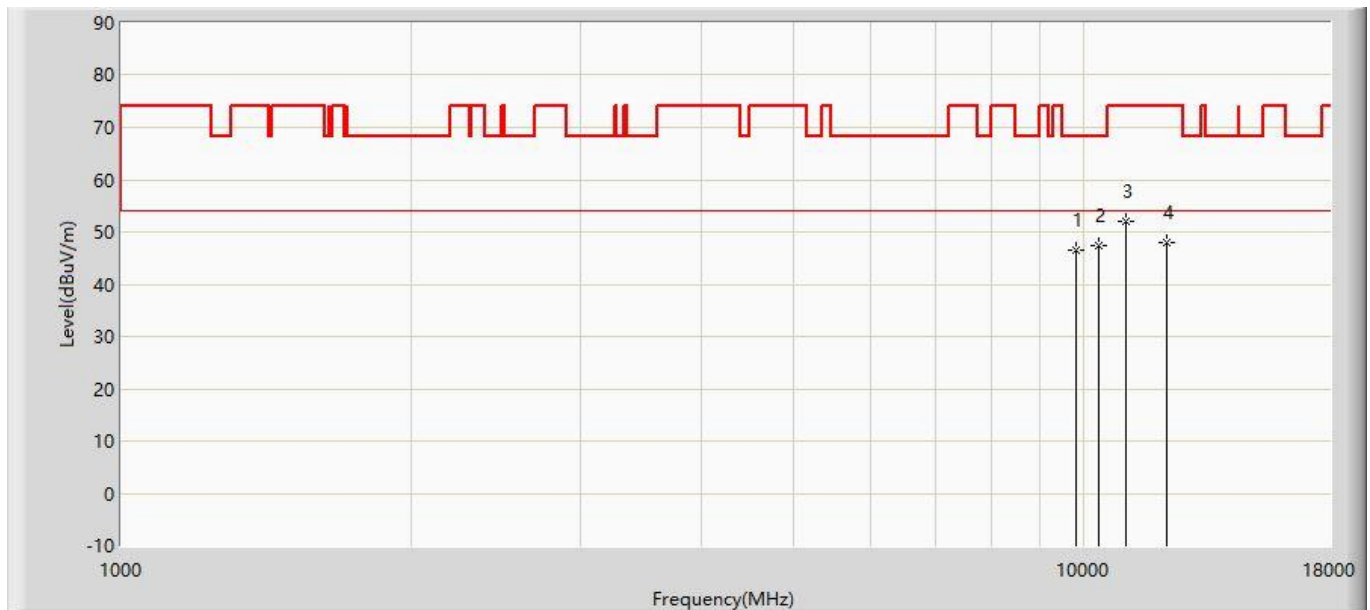


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9823.000	46.421	31.741	-21.779	68.200	14.680	PK
2		*	10350.000	47.487	31.100	-20.713	68.200	16.387	PK
3			11064.000	51.960	34.319	-22.040	74.000	17.641	PK
4			12186.000	47.933	30.119	-26.067	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with OAW-AP1322	

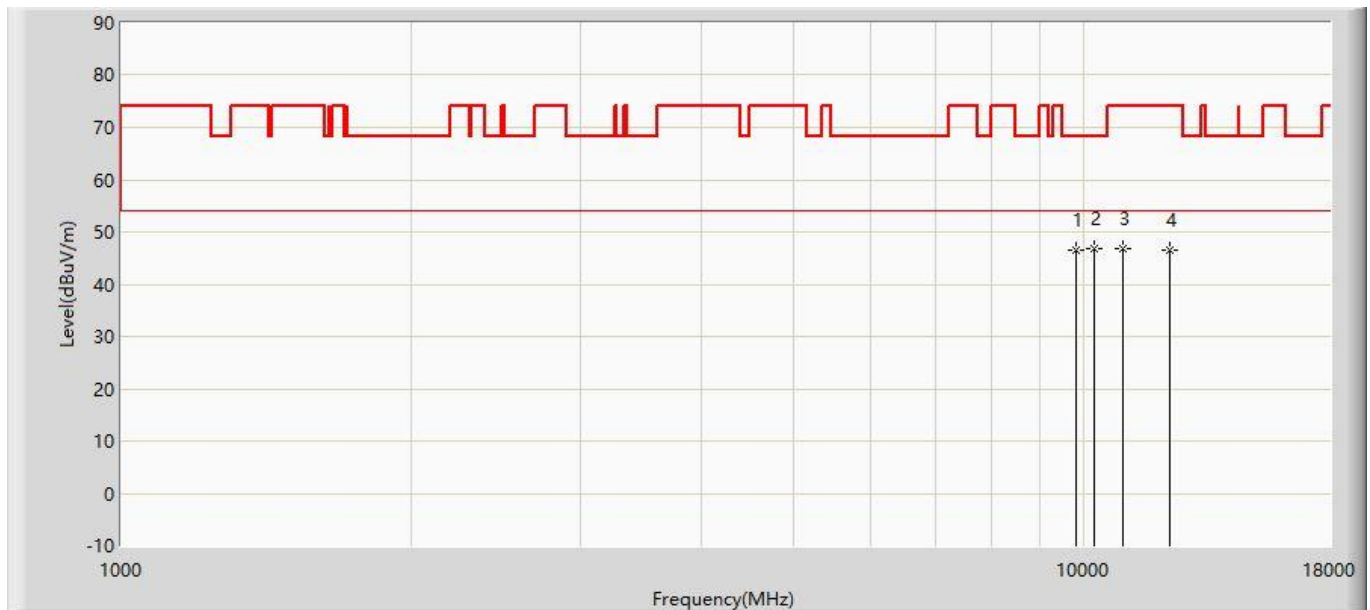


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9823.000	46.421	31.741	-21.779	68.200	14.680	PK
2		*	10231.000	46.804	30.800	-21.396	68.200	16.004	PK
3			10979.000	46.854	29.304	-27.146	74.000	17.550	PK
4			12254.000	46.569	28.756	-27.431	74.000	17.813	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz with OAW-AP1322	

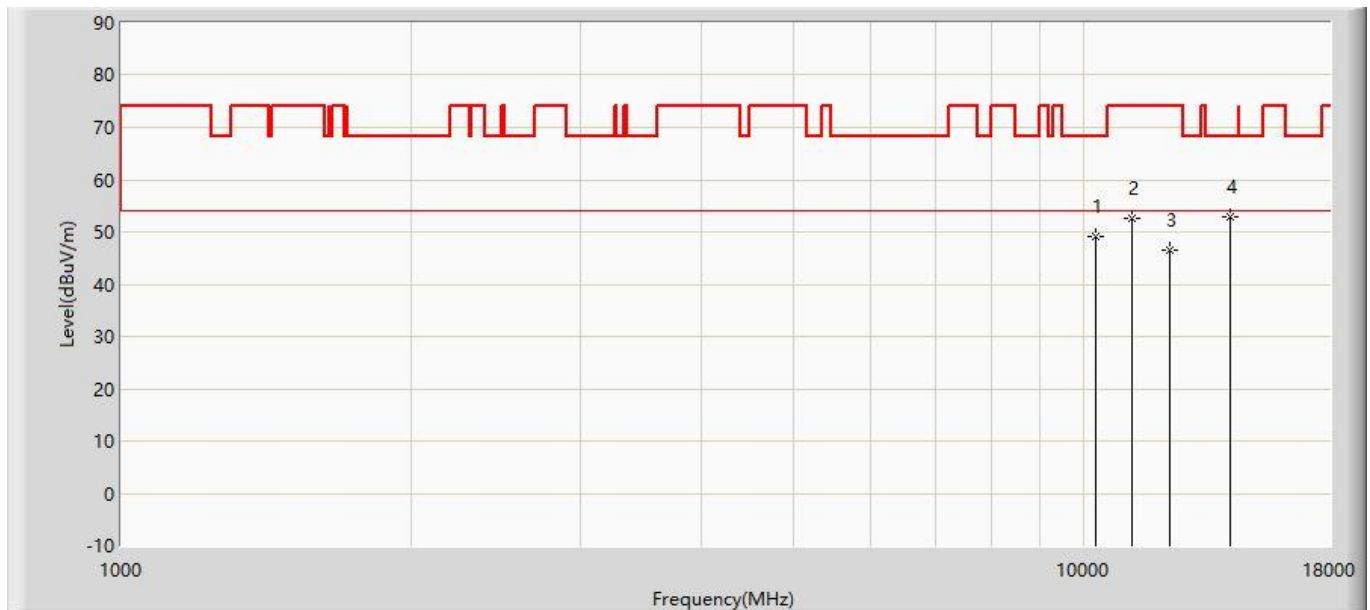


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10299.000	49.210	32.987	-18.990	68.200	16.223	PK
2			11217.000	52.534	34.750	-21.466	74.000	17.784	PK
3			12254.000	46.569	28.756	-27.431	74.000	17.813	PK
4		*	14175.000	52.907	32.015	-15.293	68.200	20.892	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz with OAW-AP1322	

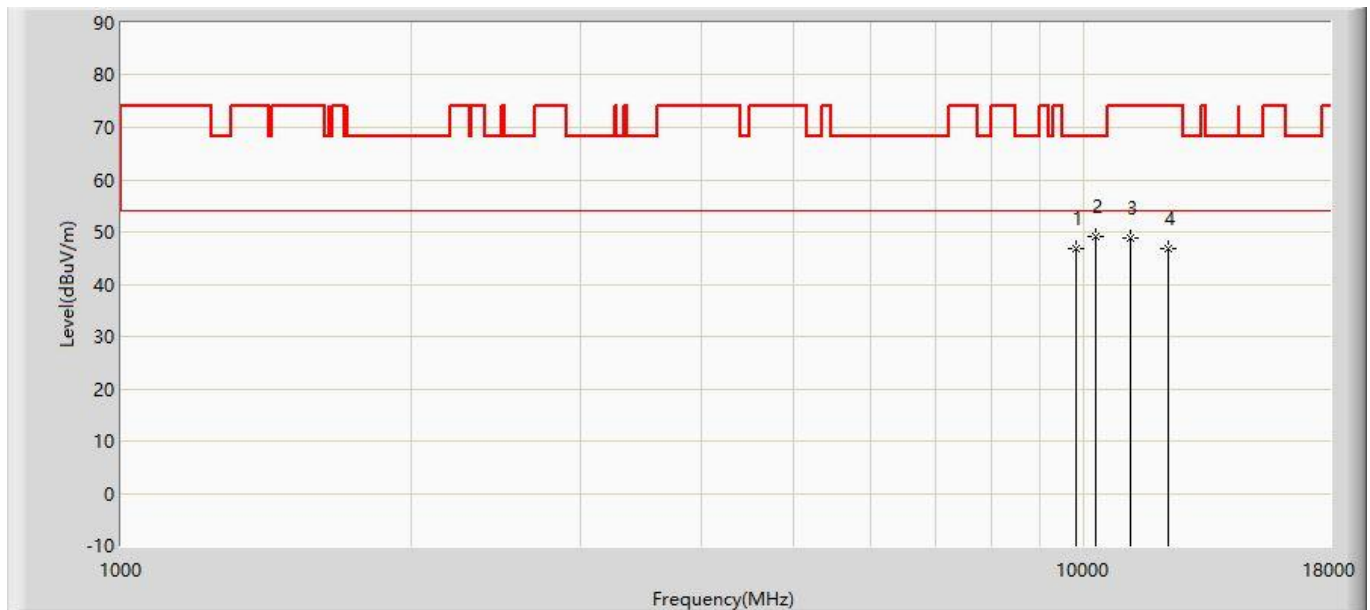

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9823.000	46.869	32.189	-21.331	68.200	14.680	PK
2		*	10299.000	49.210	32.987	-18.990	68.200	16.223	PK
3			11183.000	48.905	31.153	-25.095	74.000	17.752	PK
4			12220.000	46.857	29.043	-27.143	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)