

測試頻道: IEEE 802.11n (40 MHz) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

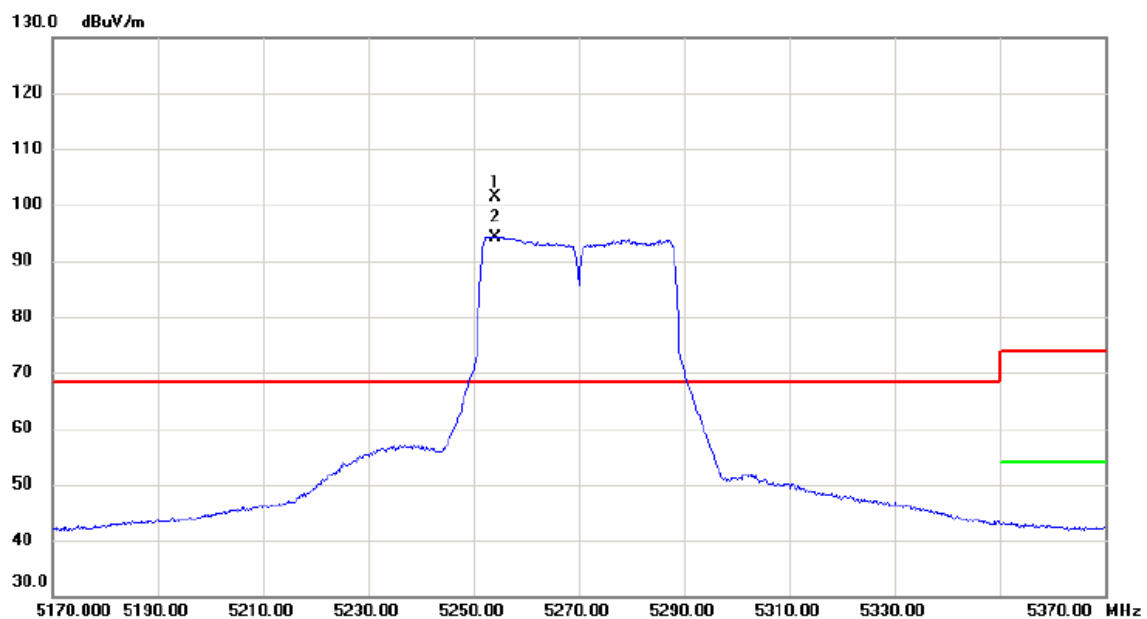

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5254.200	103.13	-1.64	101.49	68.30	33.19	peak	主波訊號不予判定
2	X	5254.200	95.83	-1.64	94.19	68.30	25.89	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

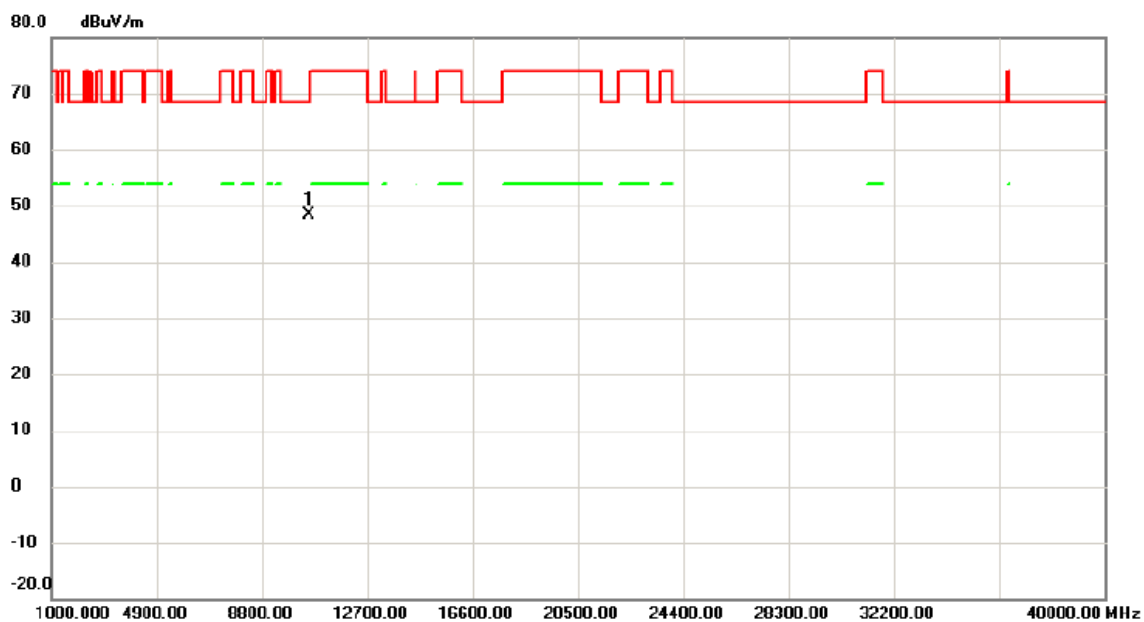

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10516.10	46.58	1.75	48.33	68.30	-19.97	peak	

測試頻道: IEEE 802.11n (40 MHz) /
5310 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

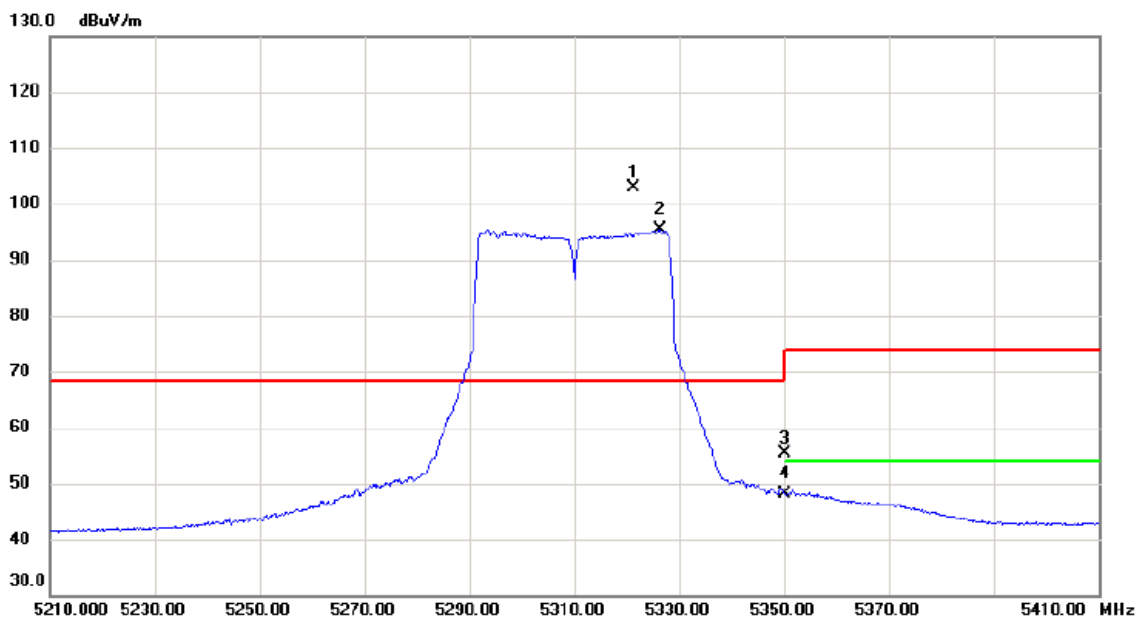

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5321.400	104.55	-1.60	102.95	68.30	34.65	peak	主波訊號不予判定
2	X	5326.400	96.93	-1.59	95.34	68.30	27.04	AVG	主波訊號不予判定
3		5350.000	57.06	-1.57	55.49	74.00	-18.51	peak	
4		5350.000	49.79	-1.57	48.22	54.00	-5.78	AVG	

測試頻道: IEEE 802.11n (40 MHz) / 5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

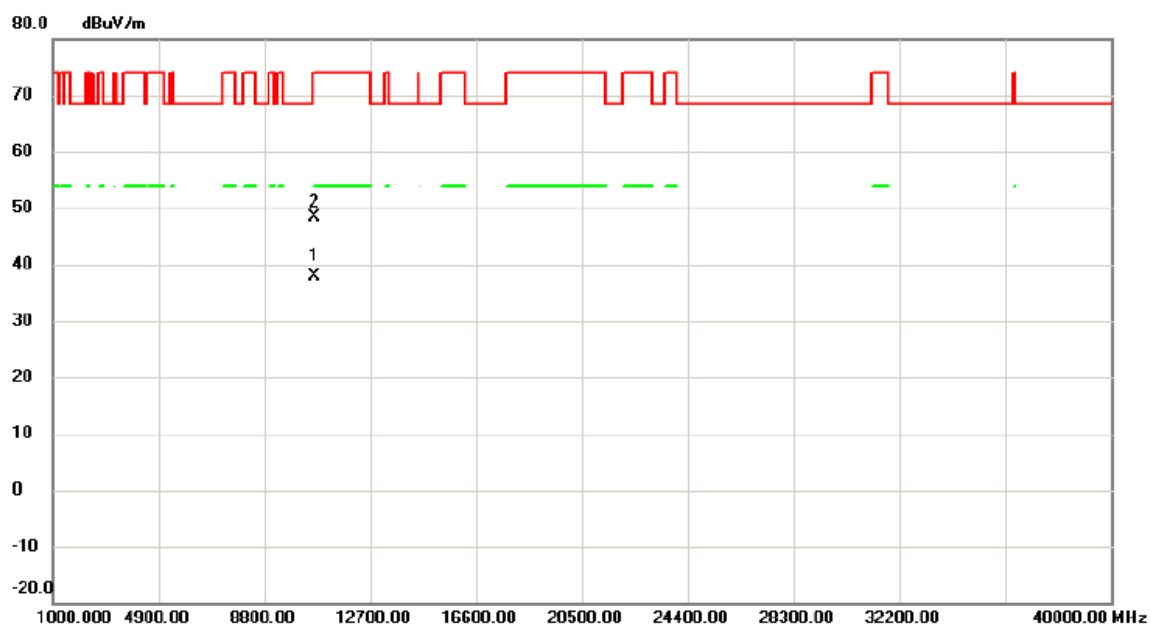

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10624.70	36.00	1.90	37.90	54.00	-16.10	AVG	
2		10626.10	46.46	1.92	48.38	74.00	-25.62	peak	

測試頻道: IEEE 802.11n (40 MHz) /
5310 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

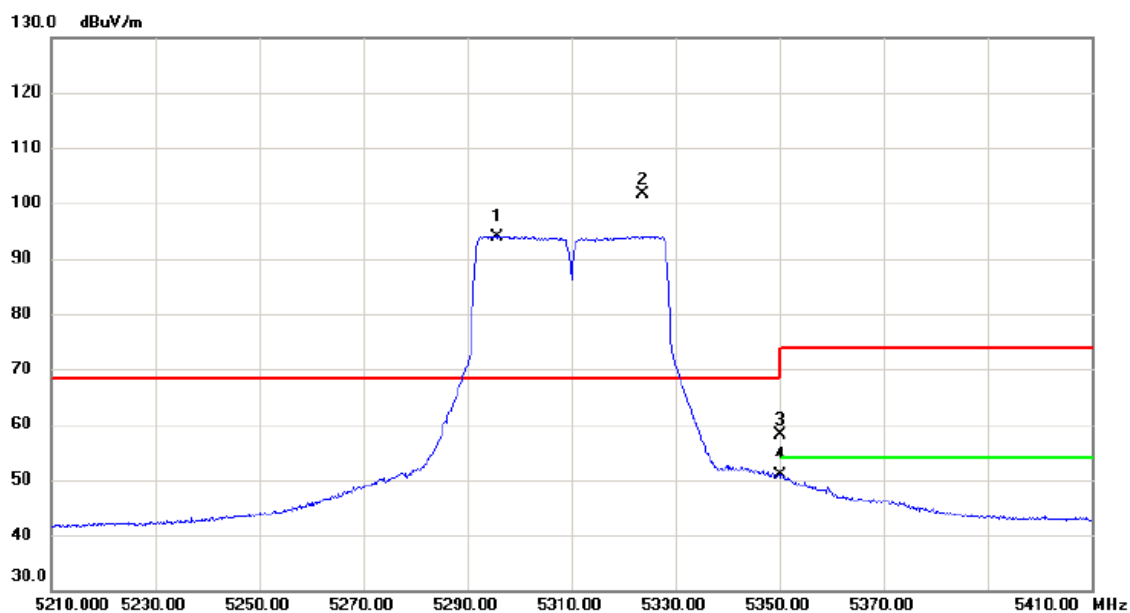

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5295.600	95.61	-1.61	94.00	68.30	25.70	AVG	主波訊號不予判定
2	*	5323.800	103.23	-1.60	101.63	68.30	33.33	peak	主波訊號不予判定
3		5350.000	59.71	-1.57	58.14	74.00	-15.86	peak	
4		5350.000	52.33	-1.57	50.76	54.00	-3.24	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

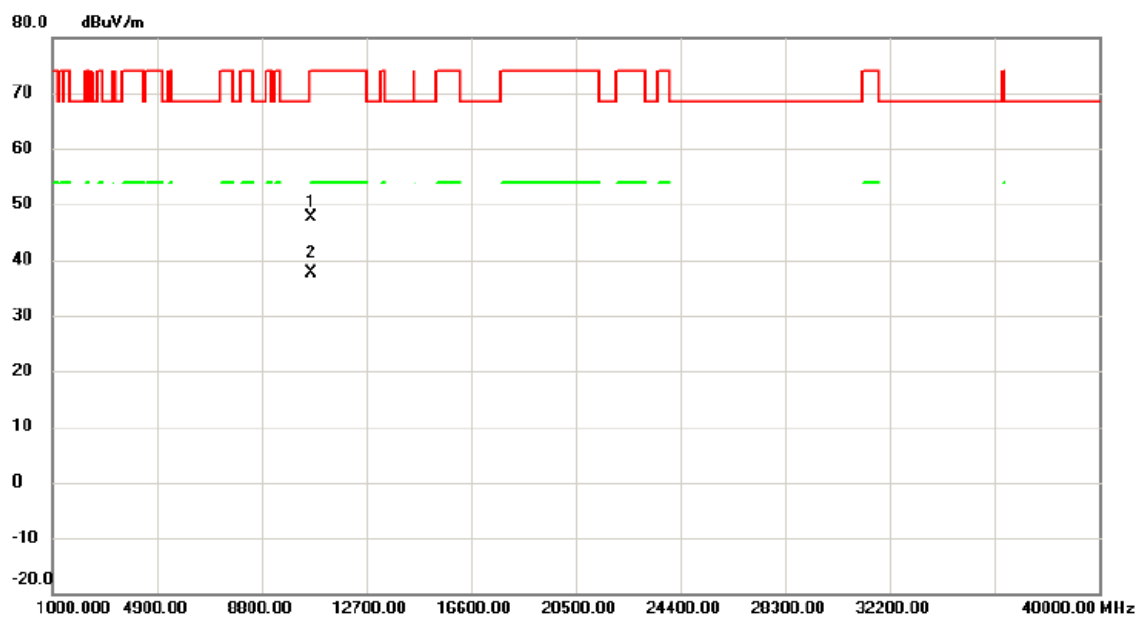


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10626.80	45.63	1.92	47.55	74.00	-26.45	peak	
2	*	10635.90	35.81	1.94	37.75	54.00	-16.25	AVG	

測試頻道: IEEE 802.11a / 5500 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

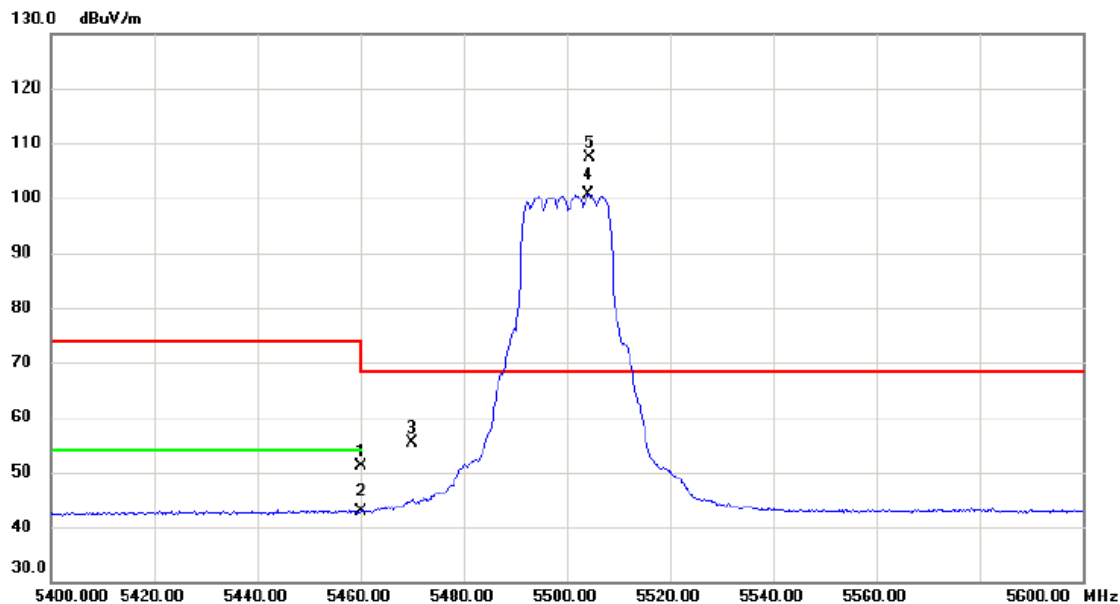


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	52.69	-1.49	51.20	74.00	-22.80	peak	
2		5460.000	44.41	-1.49	42.92	54.00	-11.08	AVG	
3		5470.000	56.74	-1.48	55.26	68.30	-13.04	peak	
4	X	5504.200	102.07	-1.45	100.62	68.30	32.32	AVG	主波訊號不予判定
5	*	5504.400	108.89	-1.45	107.44	68.30	39.14	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5500 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

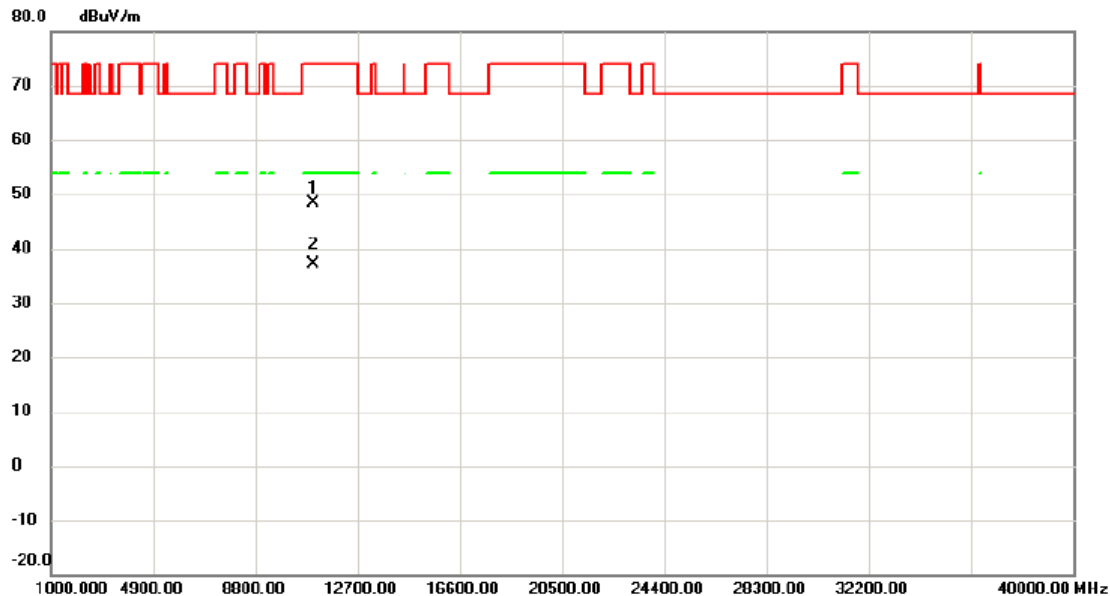


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	45.98	2.49	48.47	74.00	-25.53	peak	
2	*	11000.00	34.61	2.49	37.10	54.00	-16.90	AVG	

測試頻道: IEEE 802.11a / 5500 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/04/07
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

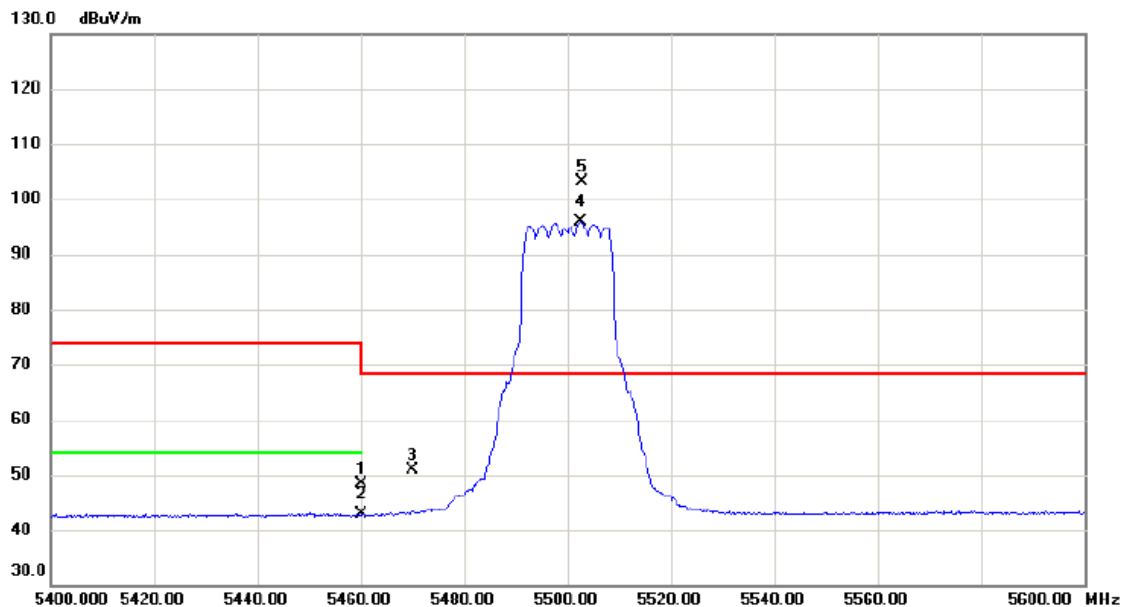


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	49.79	-1.49	48.30	74.00	-25.70	peak	
2		5460.000	44.28	-1.49	42.79	54.00	-11.21	AVG	
3		5470.000	52.32	-1.48	50.84	68.30	-17.46	peak	
4	X	5502.600	97.28	-1.46	95.82	68.30	27.52	AVG	主波訊號不予判定
5	*	5502.800	104.60	-1.46	103.14	68.30	34.84	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5500 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

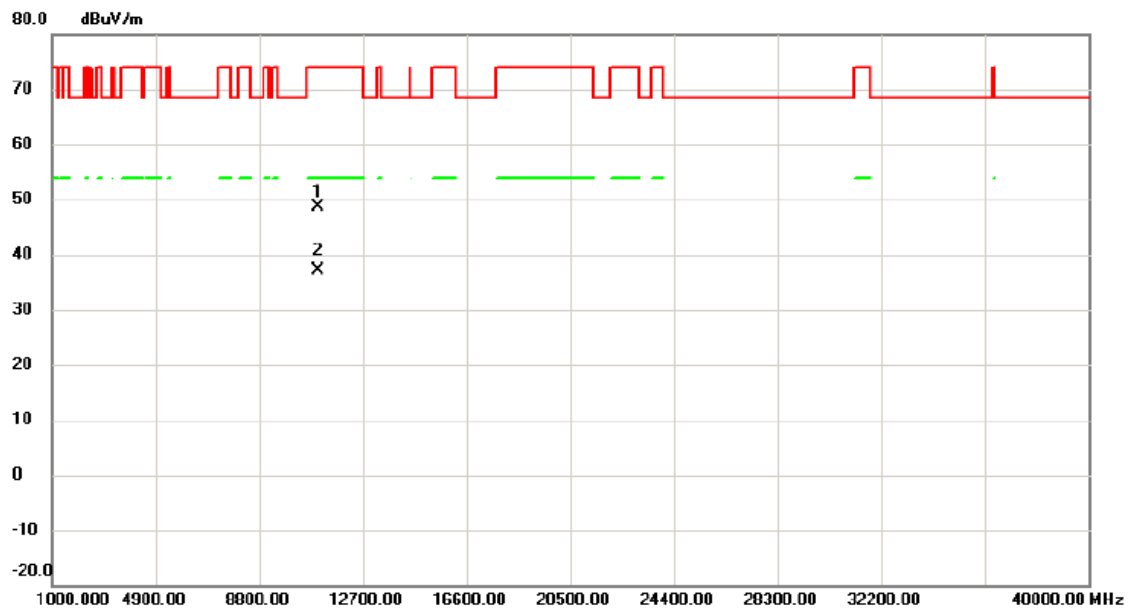


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	46.07	2.49	48.56	74.00	-25.44	peak	
2	*	11000.00	34.55	2.49	37.04	54.00	-16.96	AVG	

測試頻道: IEEE 802.11a / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

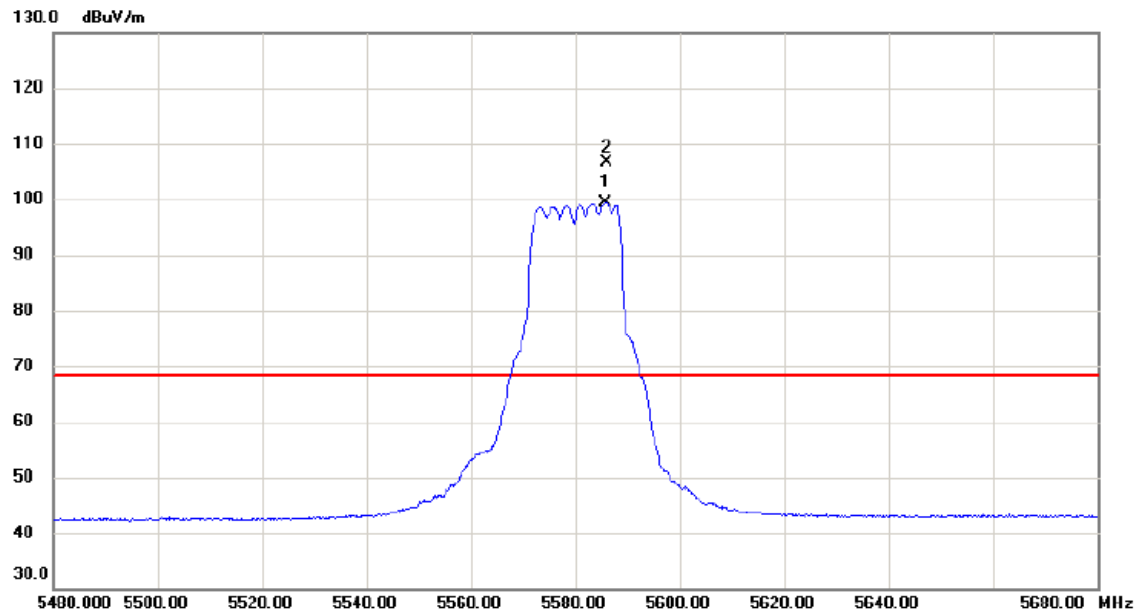

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5585.600	100.71	-1.24	99.47	68.30	31.17	AVG	主波訊號不予判定
2	*	5586.000	107.93	-1.24	106.69	68.30	38.39	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

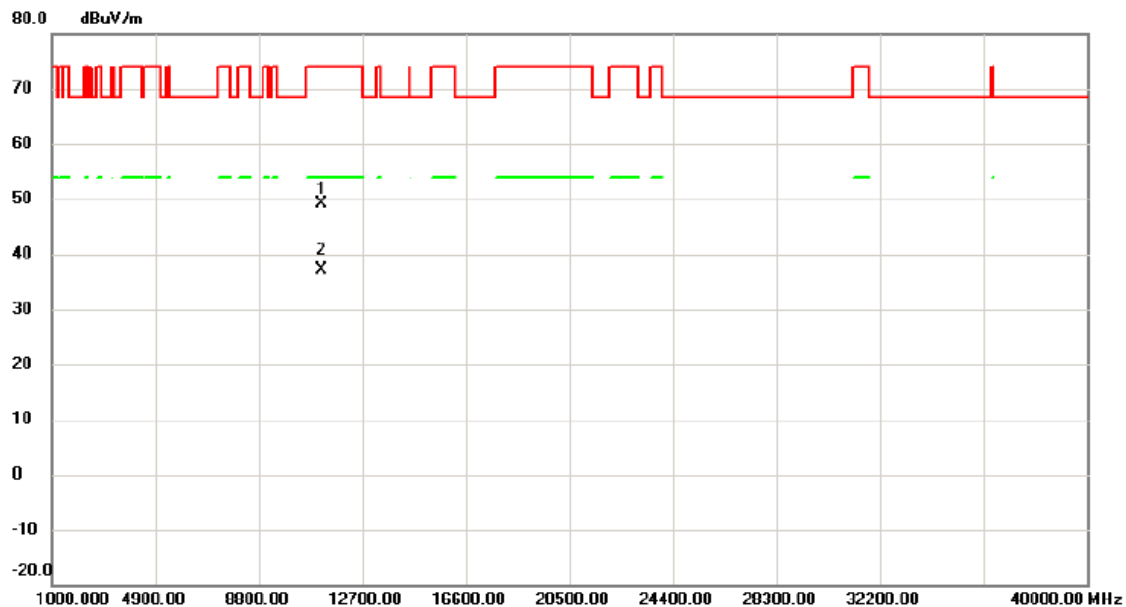


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	46.46	2.63	49.09	74.00	-24.91	peak	
2	*	11160.00	34.51	2.63	37.14	54.00	-16.86	AVG	

測試頻道: IEEE 802.11a / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

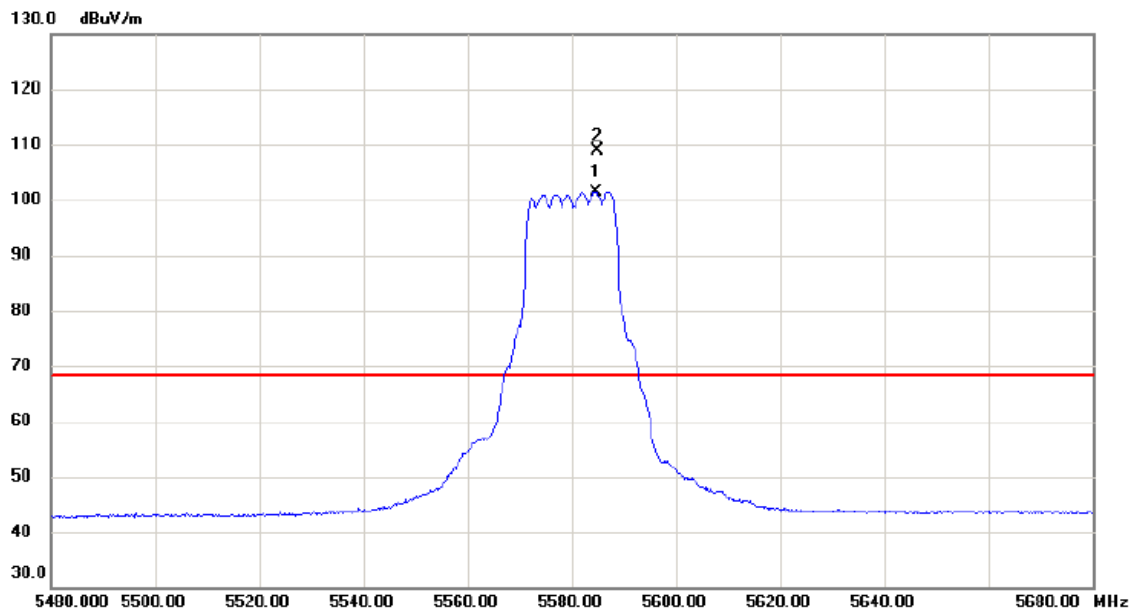


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5584.600	102.62	-1.24	101.38	68.30	33.08	AVG	主波訊號不予判定
2	*	5585.000	110.11	-1.24	108.87	68.30	40.57	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

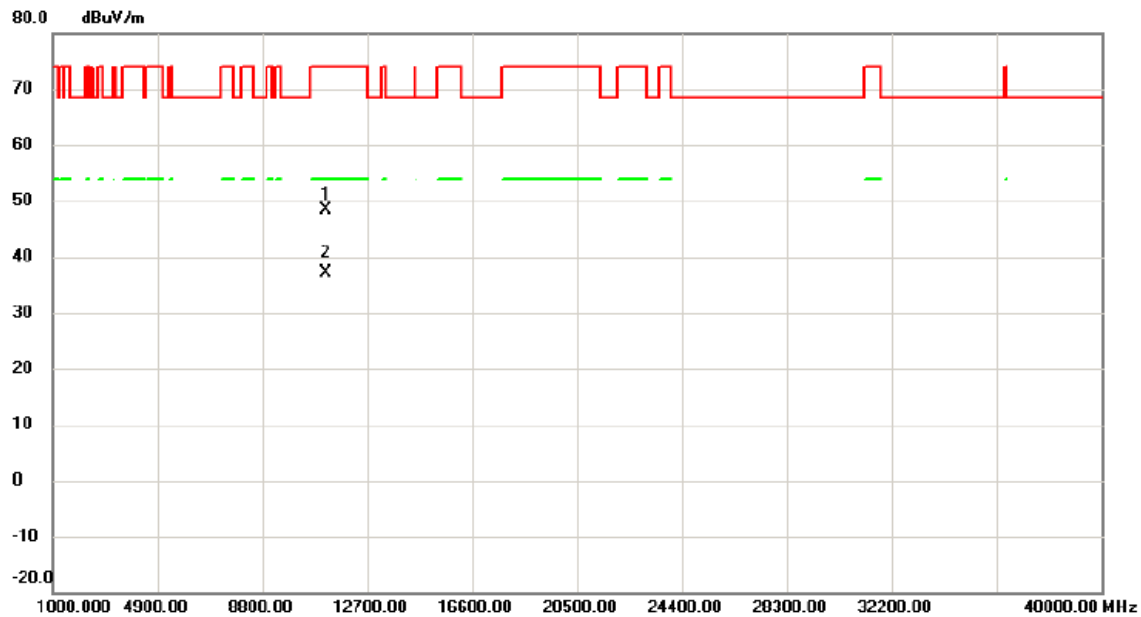

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	45.71	2.63	48.34	74.00	-25.66	peak	
2	*	11160.00	34.52	2.63	37.15	54.00	-16.85	AVG	

測試頻道: IEEE 802.11a / 5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

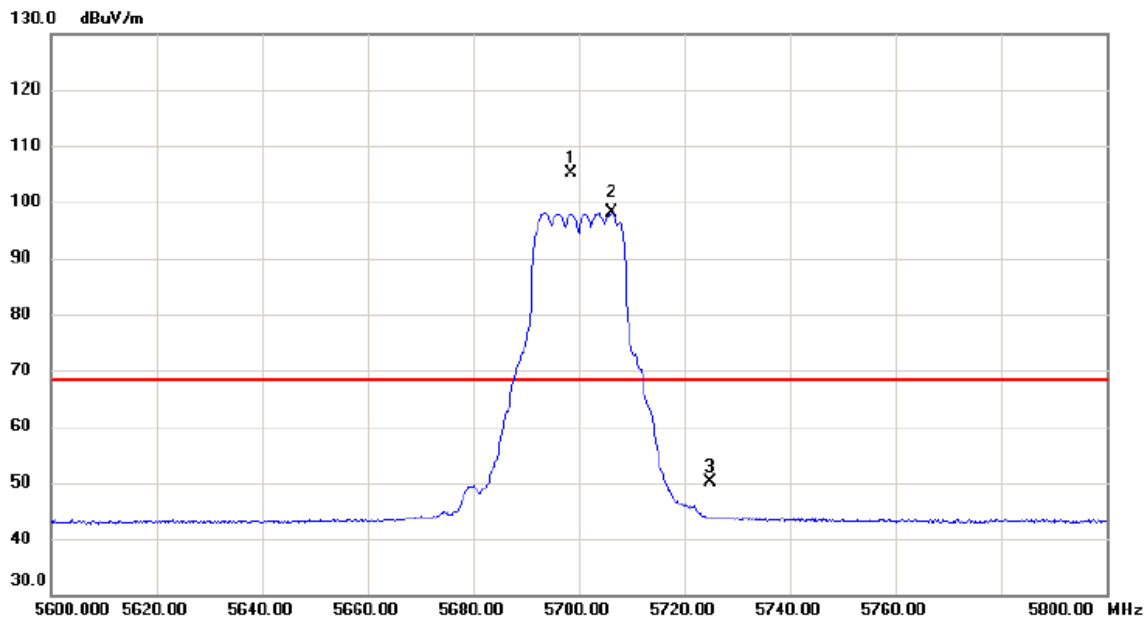


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5698.600	106.01	-0.95	105.06	68.30	36.76	peak	主波訊號不予判定
2	X	5706.200	99.05	-0.94	98.11	68.30	29.81	AVG	主波訊號不予判定
3		5725.000	51.04	-0.89	50.15	68.30	-18.15	peak	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

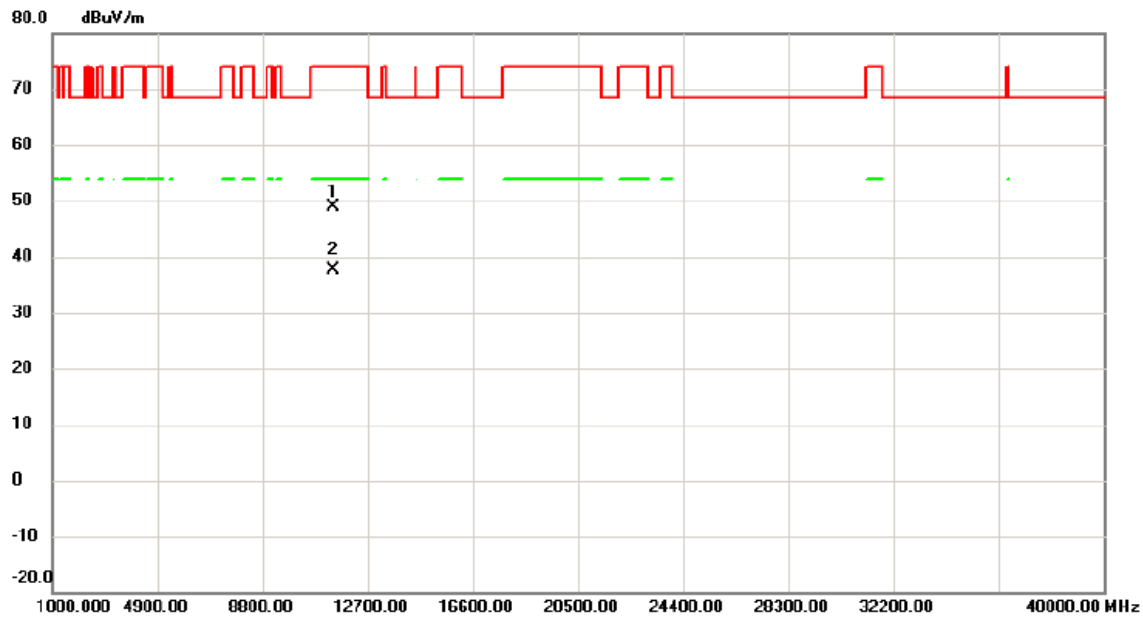


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	46.03	2.82	48.85	74.00	-25.15	peak	
2	*	11400.00	34.93	2.82	37.75	54.00	-16.25	AVG	

測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/04/07
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

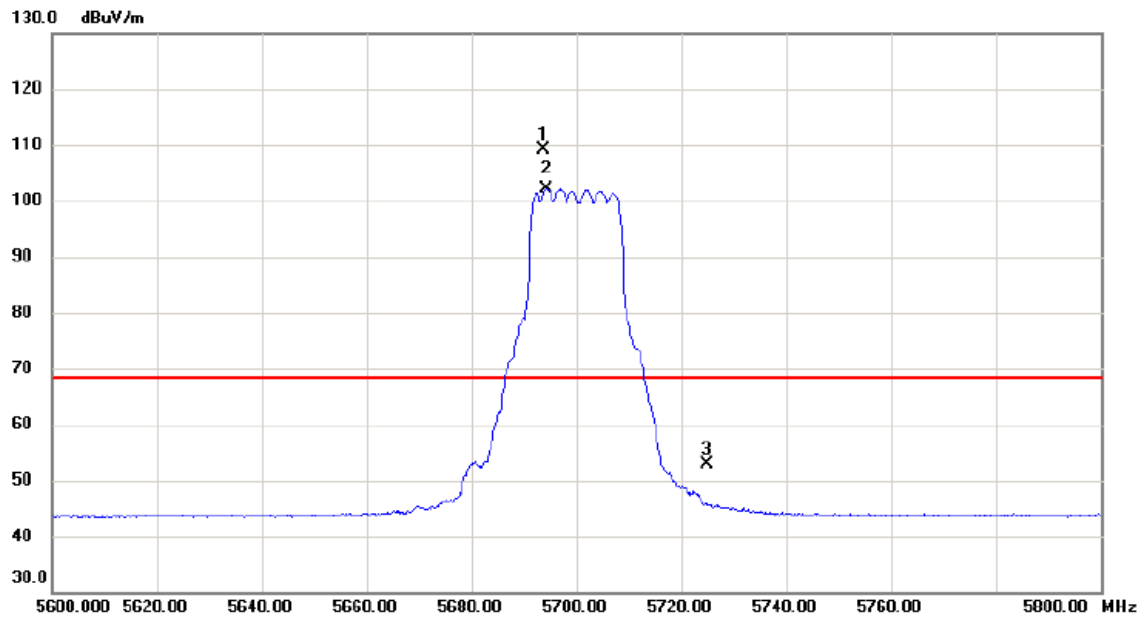


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5693.600	110.22	-0.97	109.25	68.30	40.95	peak	主波訊號不予判定
2	X	5694.200	103.07	-0.97	102.10	68.30	33.80	AVG	主波訊號不予判定
3		5725.000	53.89	-0.89	53.00	68.30	-15.30	peak	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

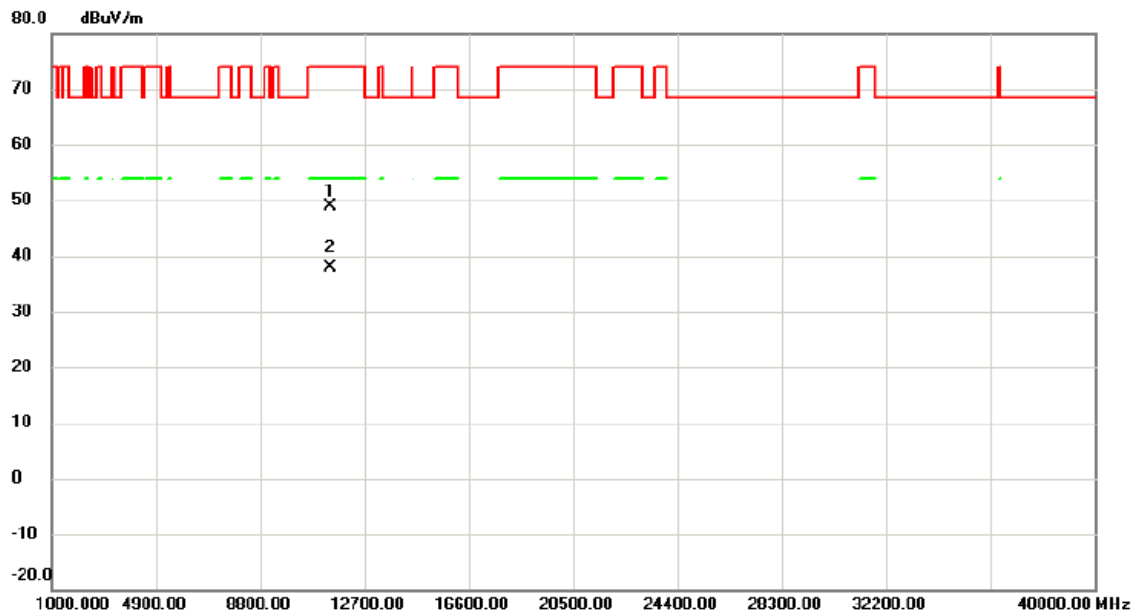

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	46.10	2.82	48.92	74.00	-25.08	peak	
2	*	11400.00	34.97	2.82	37.79	54.00	-16.21	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

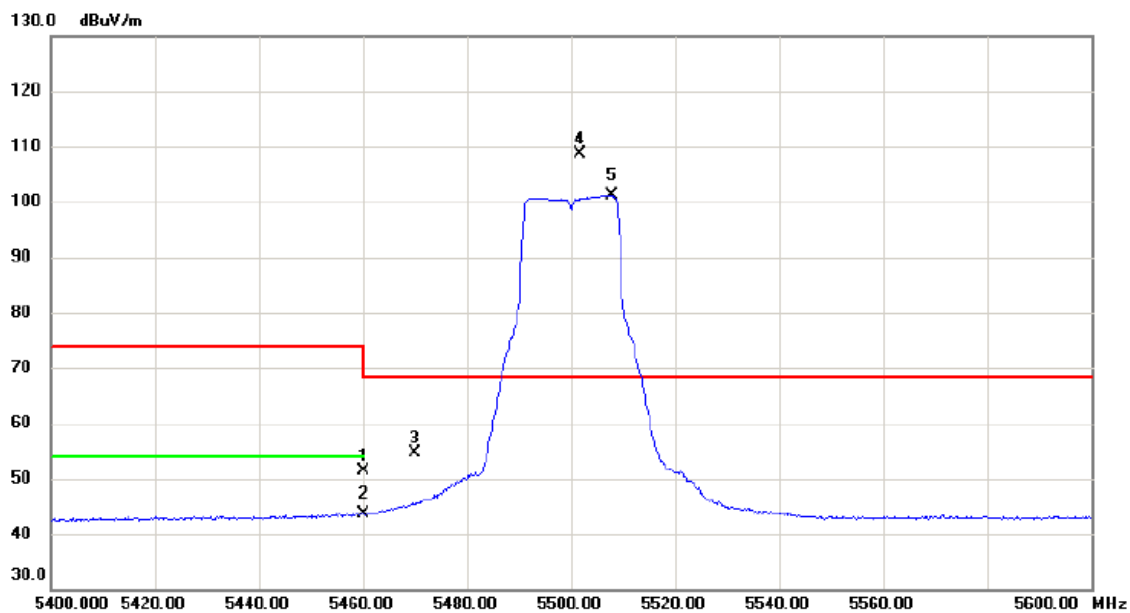

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	52.86	-1.49	51.37	74.00	-22.63	peak	
2		5460.000	45.16	-1.49	43.67	54.00	-10.33	AVG	
3		5470.000	56.02	-1.48	54.54	68.30	-13.76	peak	
4	*	5501.800	109.97	-1.46	108.51	68.30	40.21	peak	主波訊號不予判定
5	X	5507.800	102.67	-1.45	101.22	68.30	32.92	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

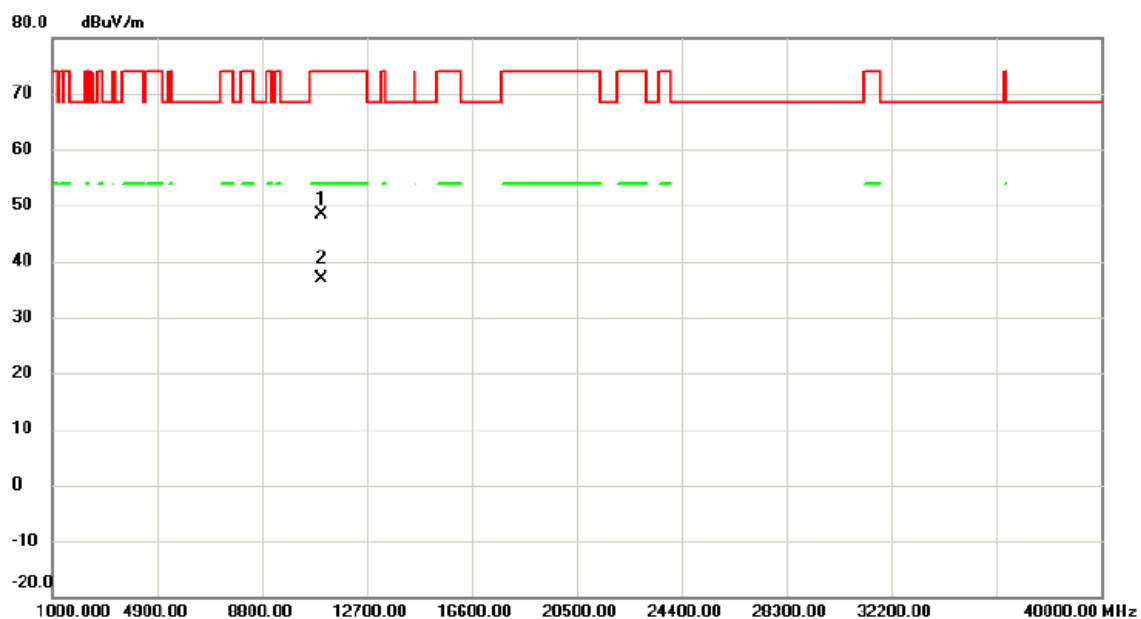

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	45.87	2.49	48.36	74.00	-25.64	peak	
2	*	11000.00	34.27	2.49	36.76	54.00	-17.24	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

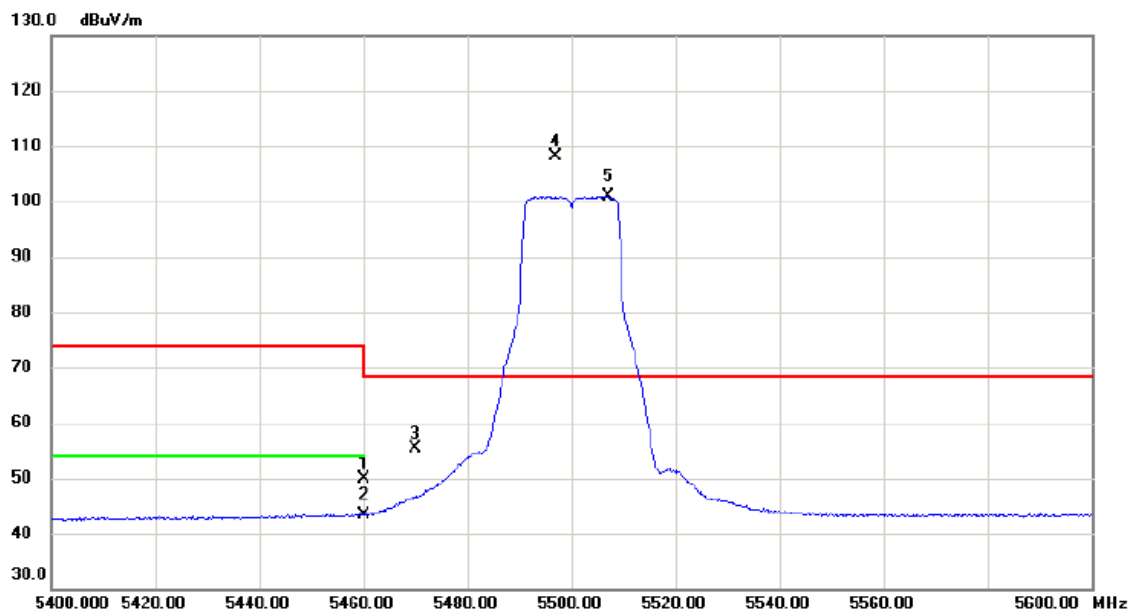

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	51.30	-1.49	49.81	74.00	-24.19	peak	
2		5460.000	44.92	-1.49	43.43	54.00	-10.57	AVG	
3		5470.000	56.98	-1.48	55.50	68.30	-12.80	peak	
4	*	5496.800	109.60	-1.46	108.14	68.30	39.84	peak	主波訊號不予判定
5	X	5507.000	102.37	-1.45	100.92	68.30	32.62	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

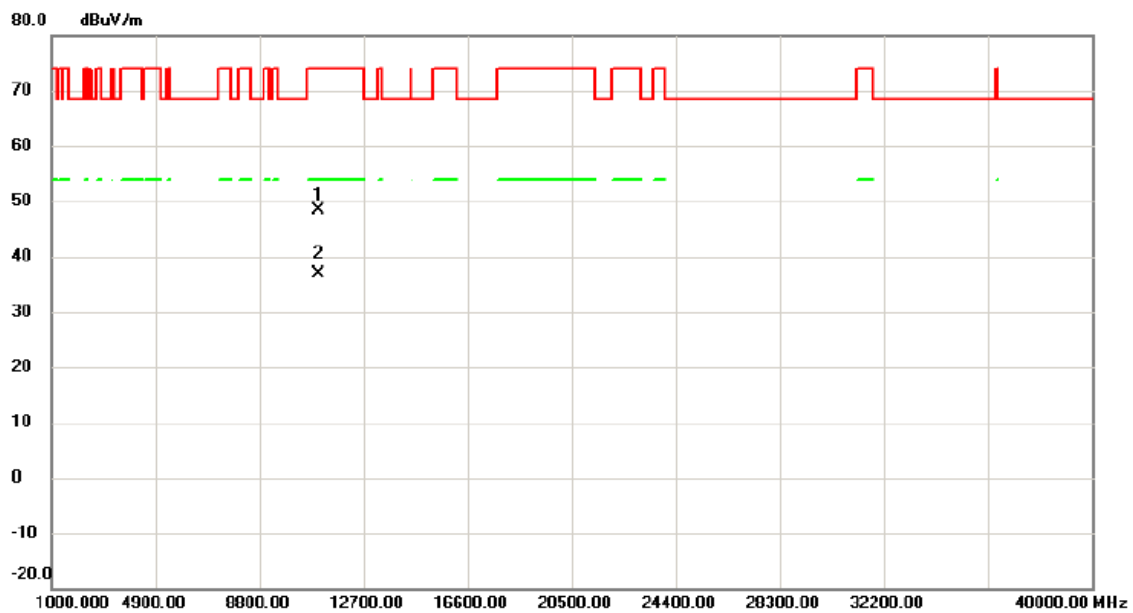

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	45.80	2.49	48.29	74.00	-25.71	peak	
2	*	11000.00	34.30	2.49	36.79	54.00	-17.21	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

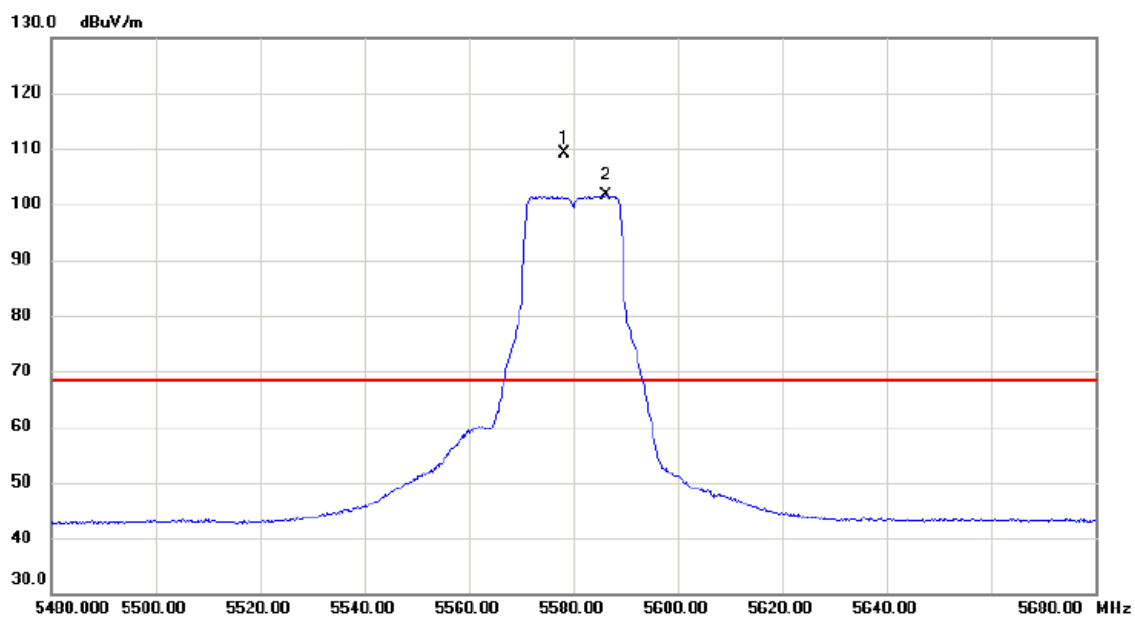


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5578.400	110.37	-1.25	109.12	68.30	40.82	peak	主波訊號不予判定
2	X	5586.200	102.78	-1.24	101.54	68.30	33.24	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

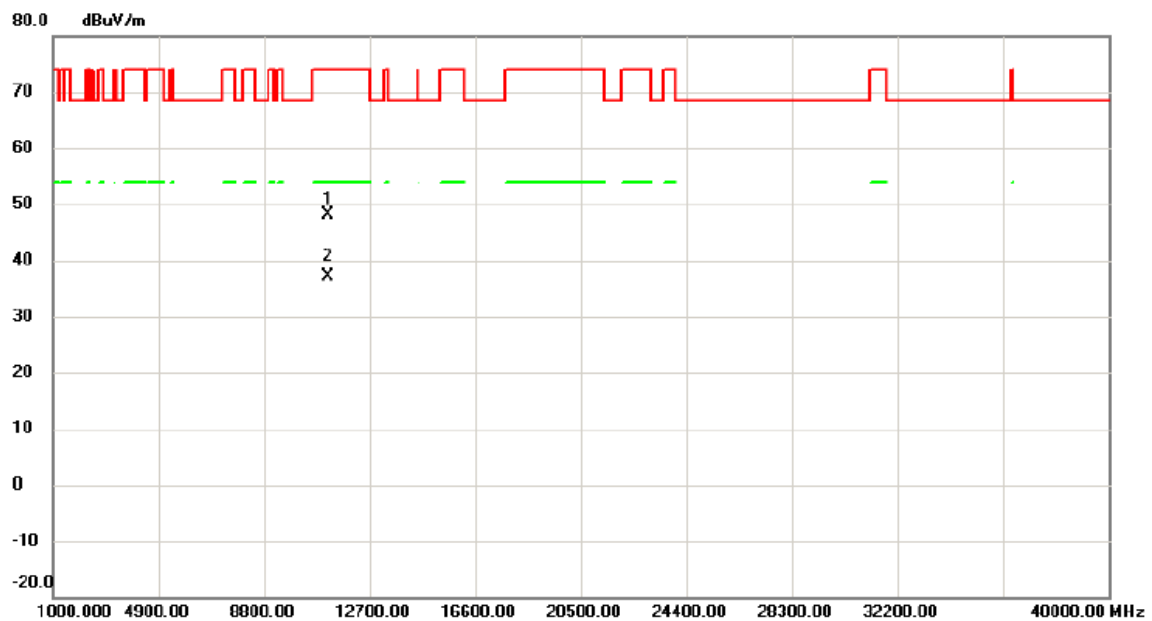

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	45.62	2.63	48.25	74.00	-25.75	peak	
2	*	11160.00	34.40	2.63	37.03	54.00	-16.97	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5580 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

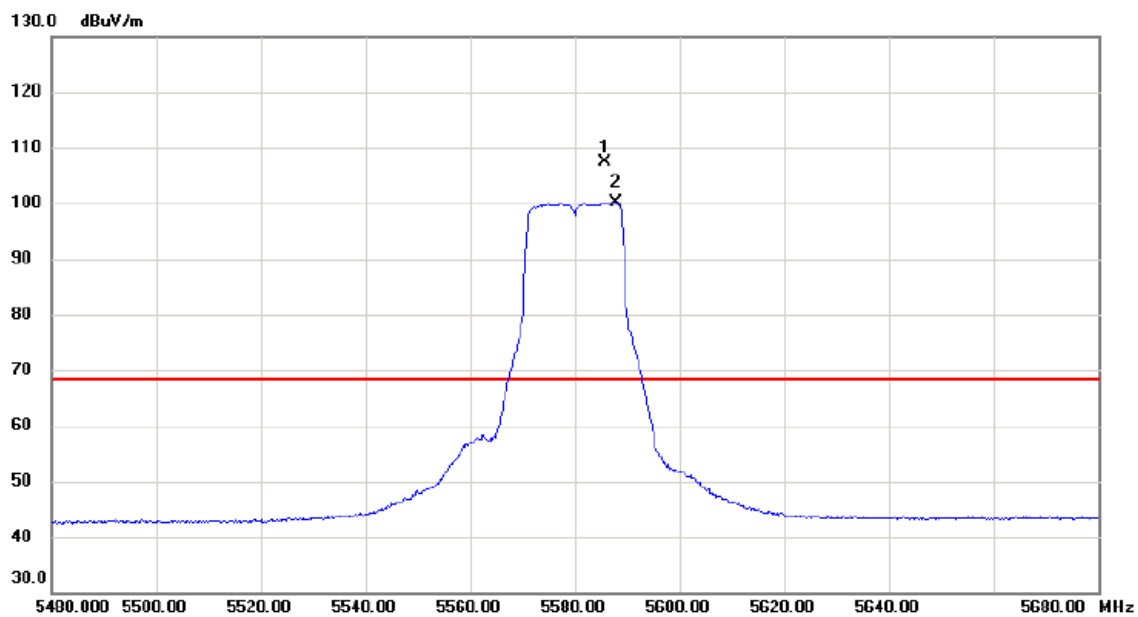

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5585.600	108.50	-1.24	107.26	68.30	38.96	peak	主波訊號不予判定
2	X	5587.800	101.25	-1.24	100.01	68.30	31.71	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
5580 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

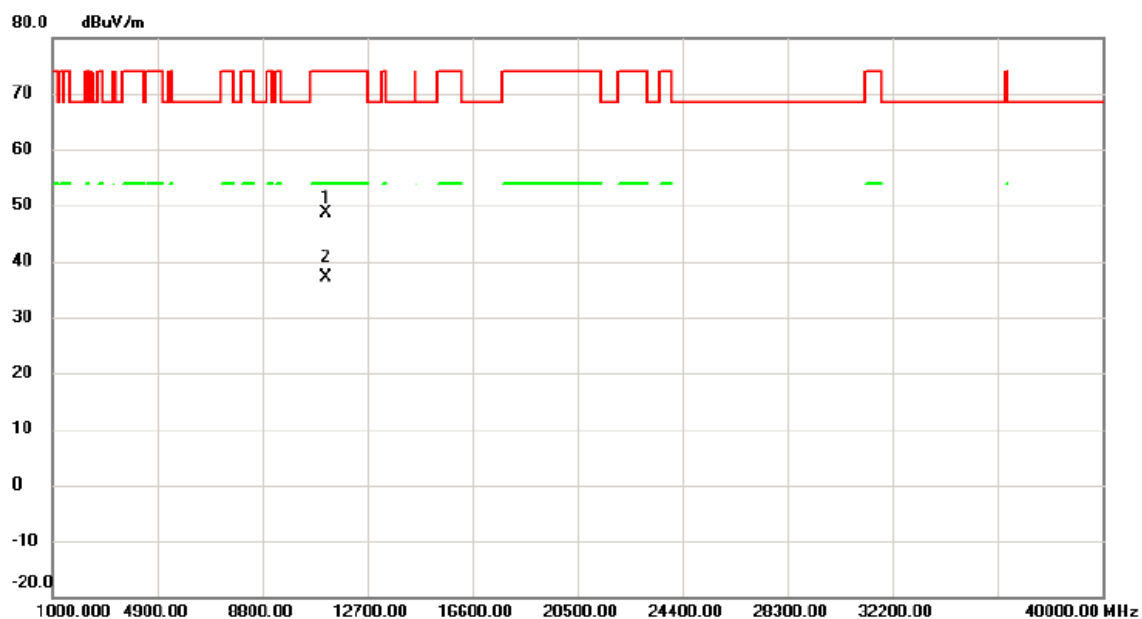

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	45.91	2.63	48.54	74.00	-25.46	peak	
2	*	11160.00	34.42	2.63	37.05	54.00	-16.95	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

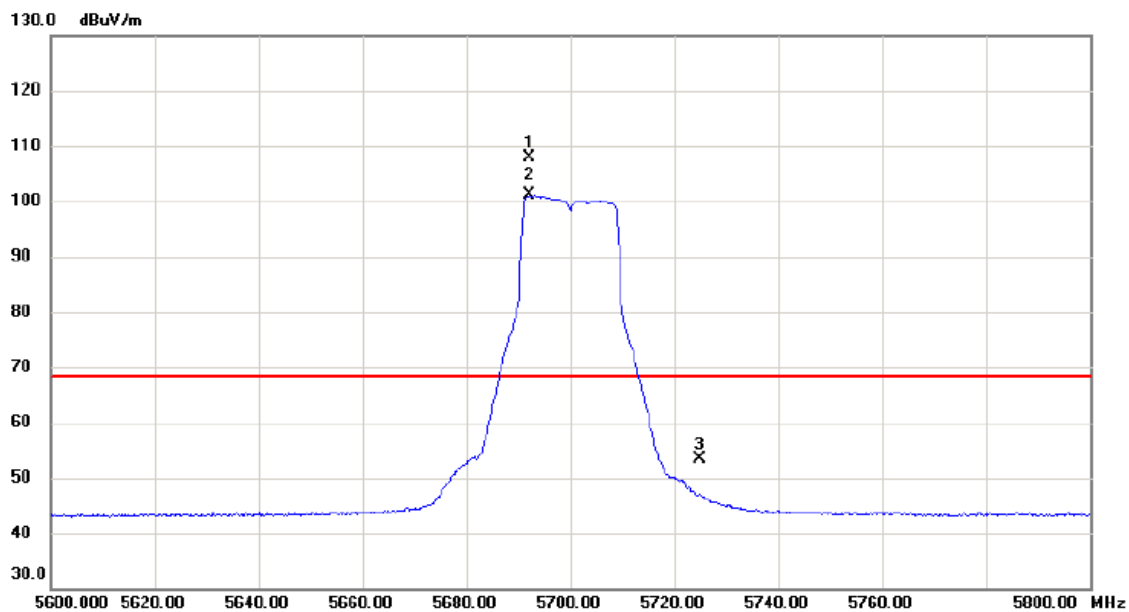

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5692.200	108.76	-0.97	107.79	68.30	39.49	peak	主波訊號不予判定
2	X	5692.200	102.10	-0.97	101.13	68.30	32.83	AVG	主波訊號不予判定
3		5725.000	54.32	-0.89	53.43	68.30	-14.87	peak	

測試頻道: IEEE 802.11n (20 MHz) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

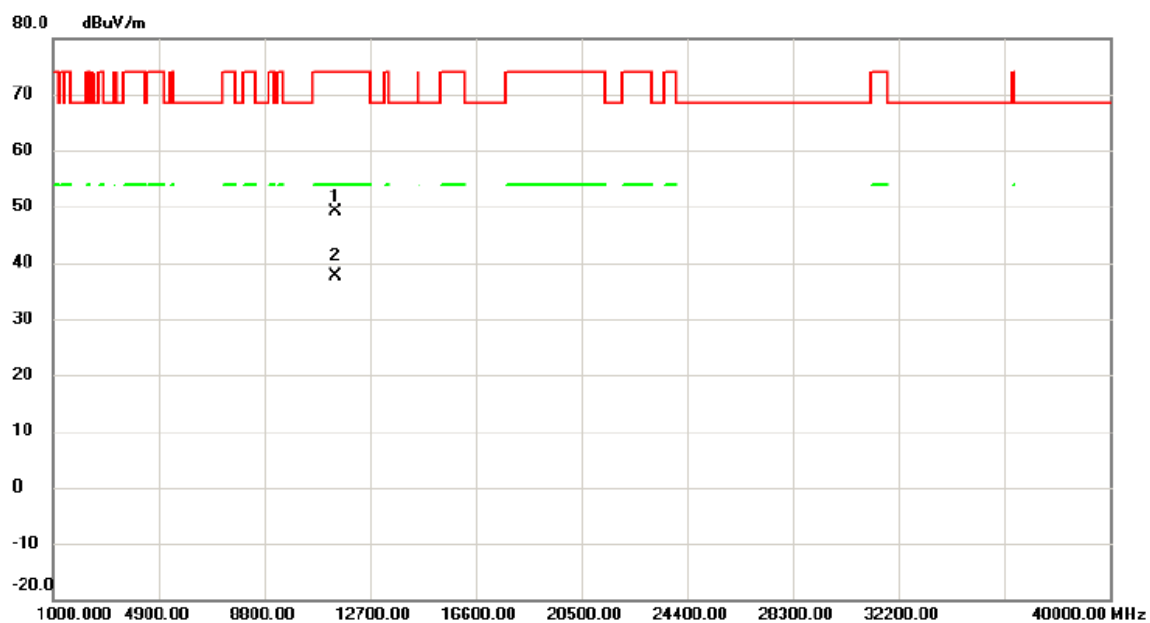

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	46.27	2.82	49.09	74.00	-24.91	peak	
2	*	11400.00	34.74	2.82	37.56	54.00	-16.44	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

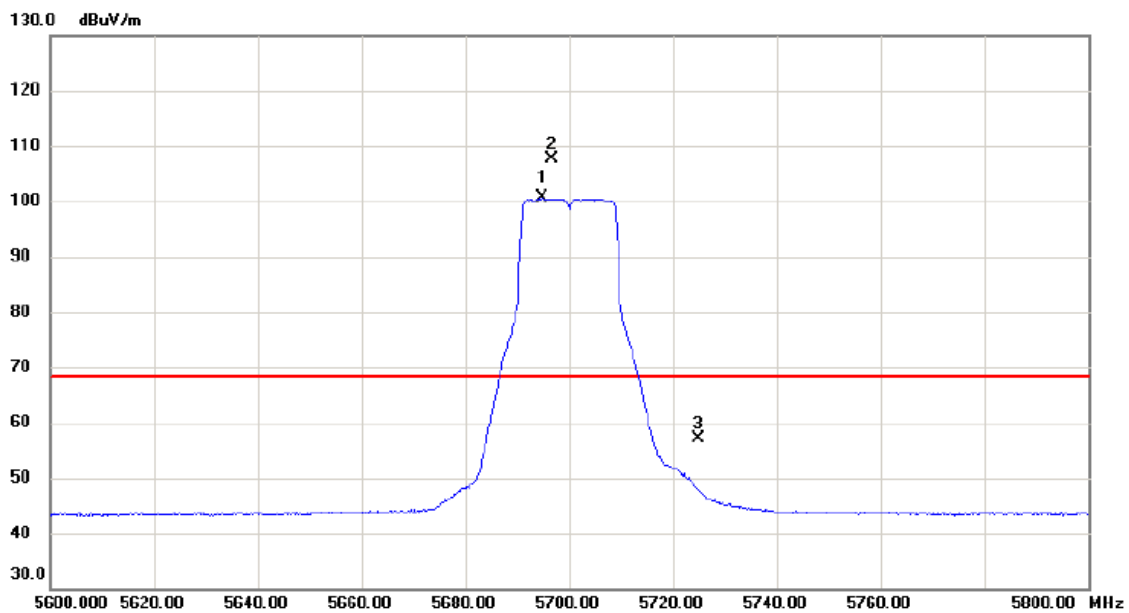

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5694.800	101.52	-0.97	100.55	68.30	32.25	AVG	主波訊號不予判定
2	*	5696.600	108.48	-0.97	107.51	68.30	39.21	peak	主波訊號不予判定
3		5725.000	58.10	-0.89	57.21	68.30	-11.09	peak	

測試頻道: IEEE 802.11n (20 MHz) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

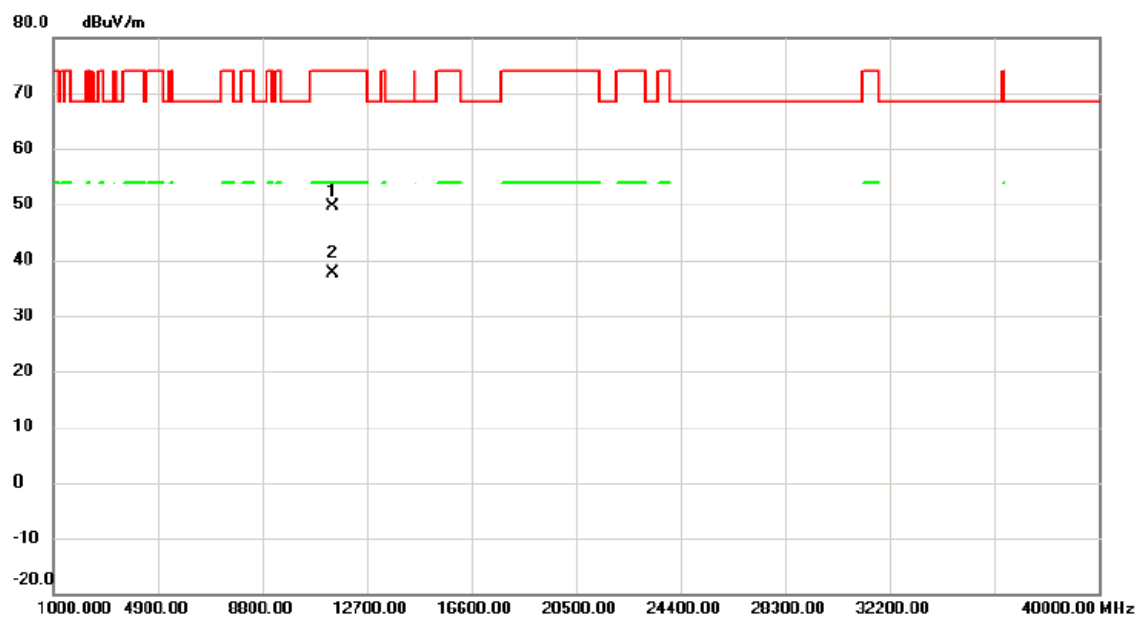

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	46.69	2.82	49.51	74.00	-24.49	peak	
2	*	11400.00	34.73	2.82	37.55	54.00	-16.45	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5510 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

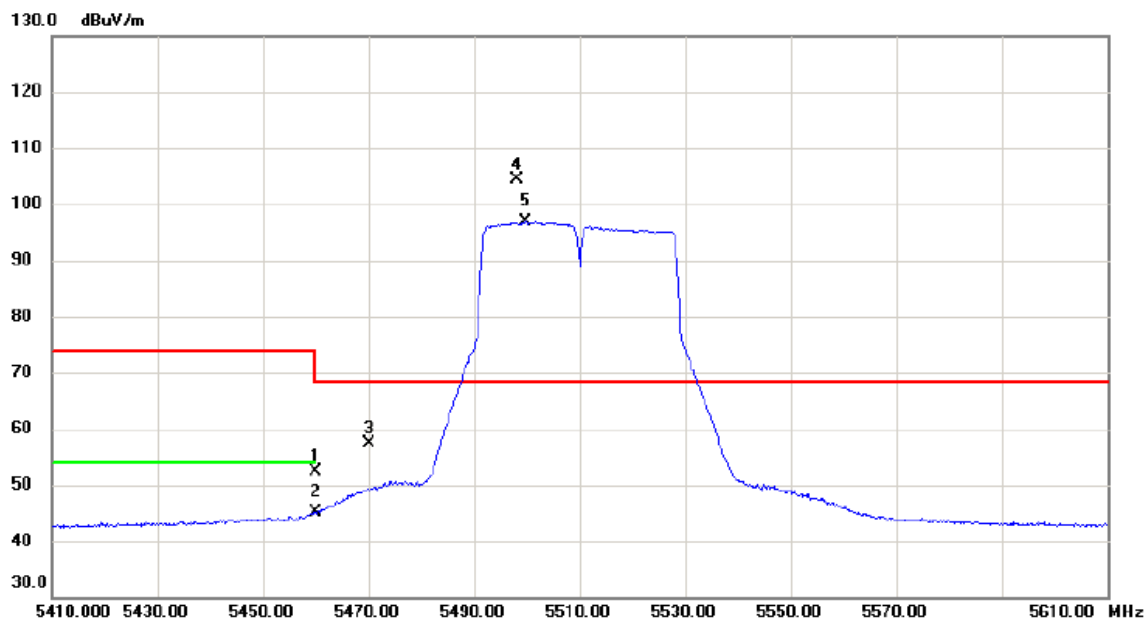

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	53.91	-1.49	52.42	74.00	-21.58	peak	
2		5460.000	46.74	-1.49	45.25	54.00	-8.75	AVG	
3		5470.000	58.82	-1.48	57.34	68.30	-10.96	peak	
4	*	5498.200	105.72	-1.46	104.26	68.30	35.96	peak	主波訊號不予判定
5	X	5499.800	98.35	-1.46	96.89	68.30	28.59	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
5510 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

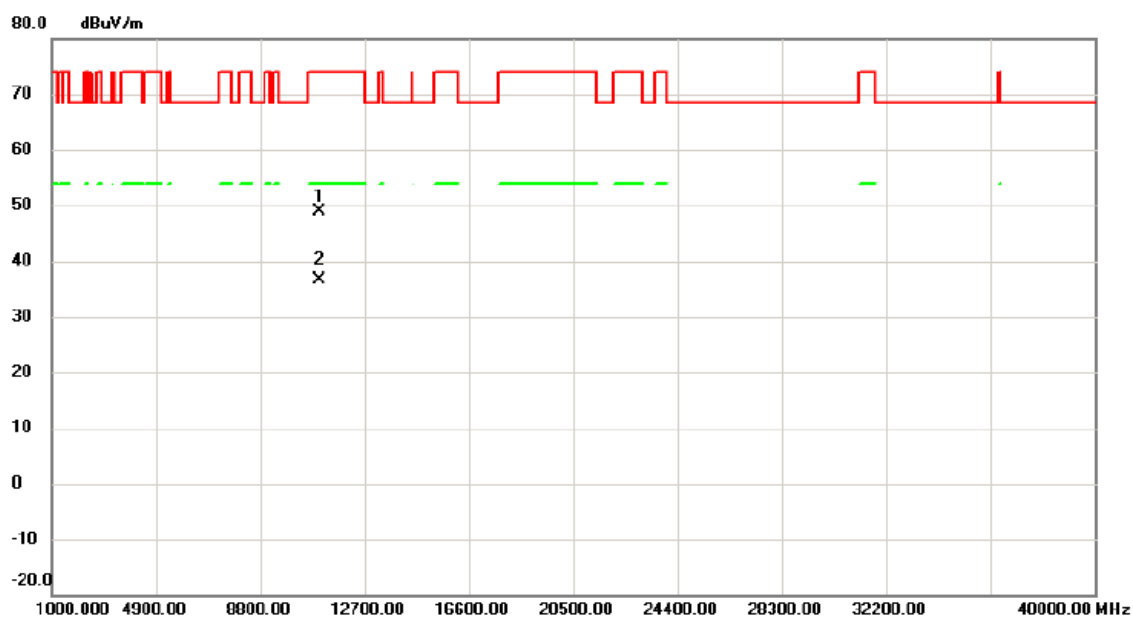

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	46.38	2.50	48.88	74.00	-25.12	peak	
2	*	11020.00	34.24	2.50	36.74	54.00	-17.26	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5510 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

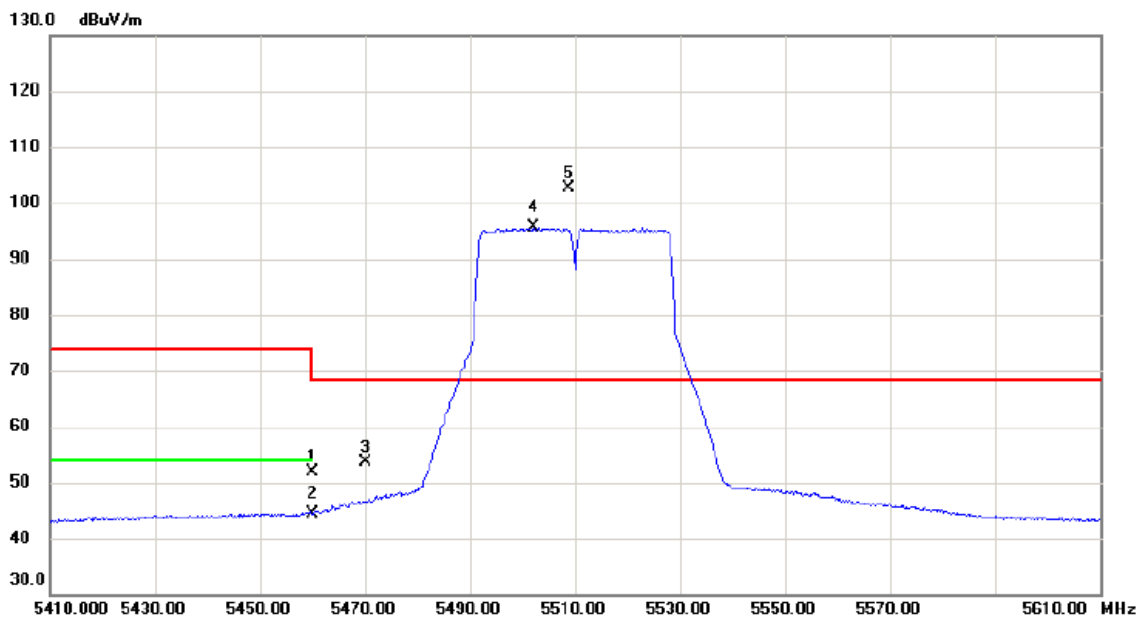

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	53.36	-1.49	51.87	74.00	-22.13	peak	
2		5460.000	45.90	-1.49	44.41	54.00	-9.59	AVG	
3		5470.000	55.01	-1.48	53.53	68.30	-14.77	peak	
4	X	5502.000	97.09	-1.46	95.63	68.30	27.33	AVG	主波訊號不予判定
5	*	5508.800	104.01	-1.45	102.56	68.30	34.26	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
5510 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

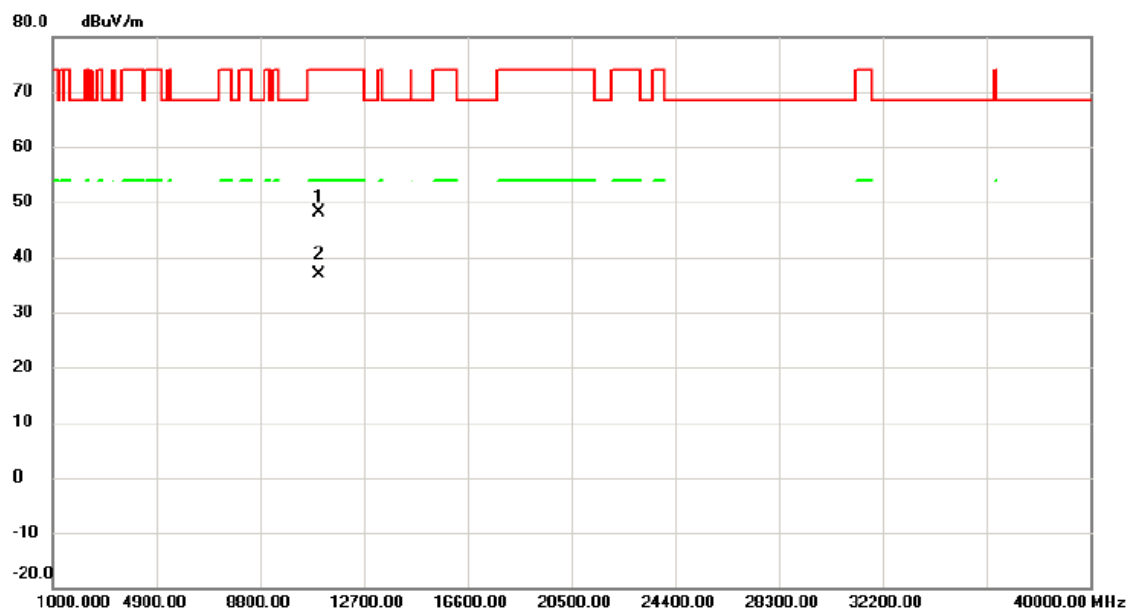

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	45.58	2.50	48.08	74.00	-25.92	peak	
2	*	11020.00	34.36	2.50	36.86	54.00	-17.14	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

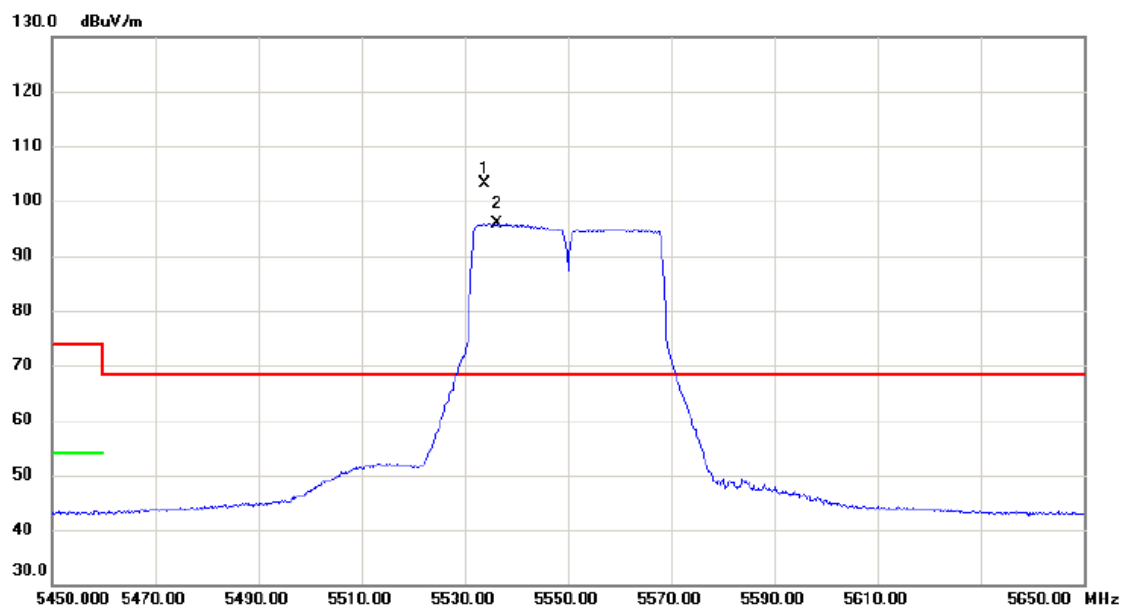

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5533.800	104.53	-1.37	103.16	68.30	34.86	peak	主波訊號不予判定
2	X	5536.400	97.24	-1.36	95.88	68.30	27.58	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

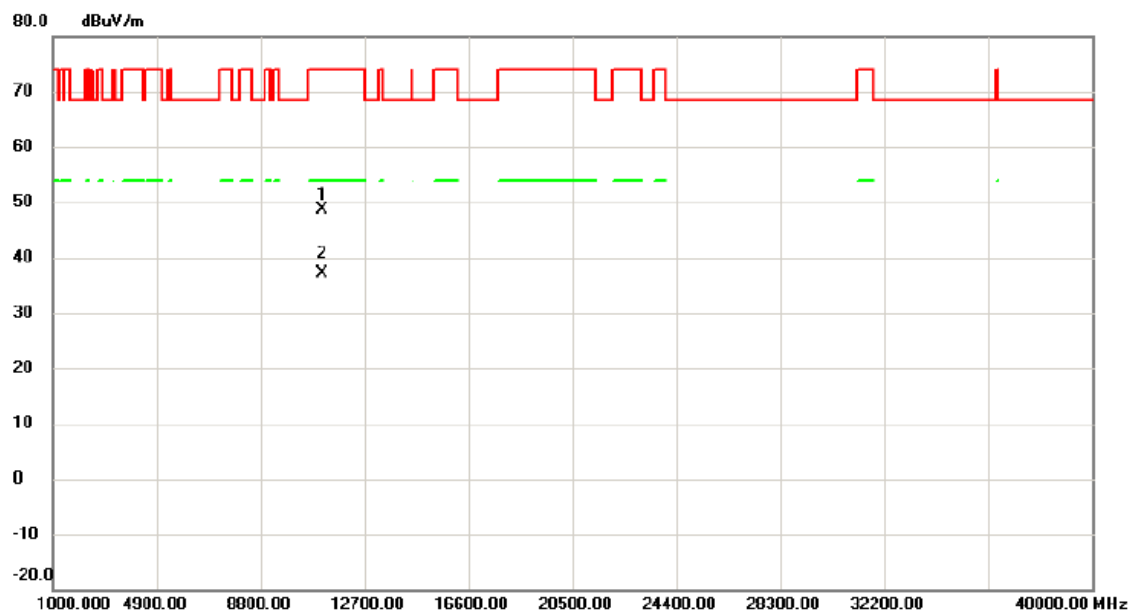


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	45.99	2.58	48.57	74.00	-25.43	peak	
2	*	11100.00	34.44	2.58	37.02	54.00	-16.98	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5550 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

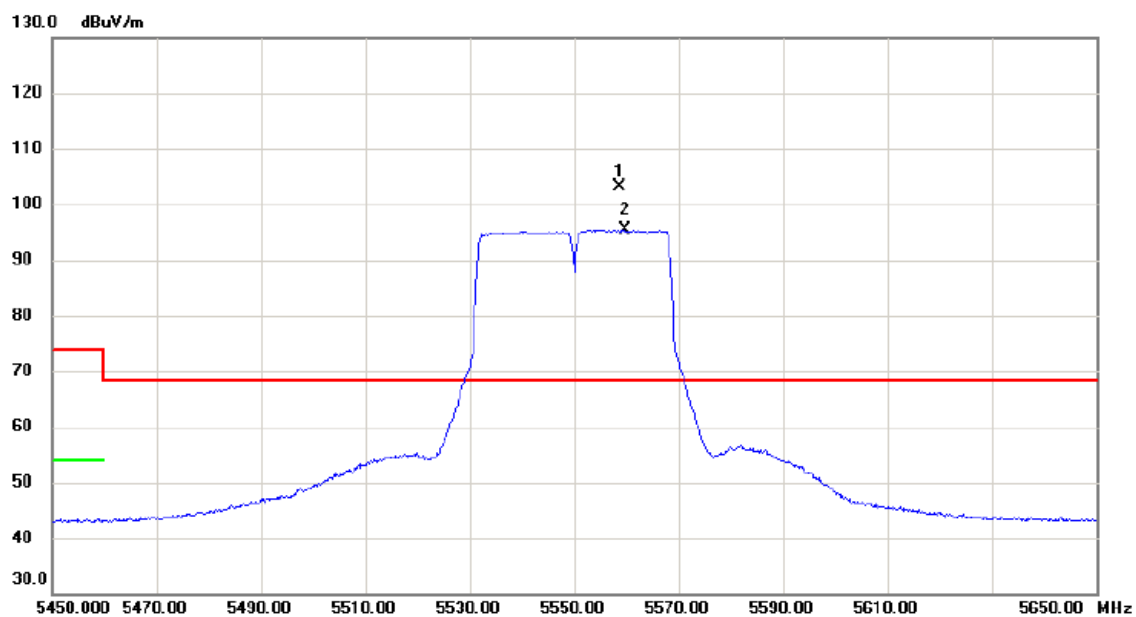

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5558.600	104.35	-1.31	103.04	68.30	34.74	peak	主波訊號不予判定
2	X	5559.600	96.68	-1.30	95.38	68.30	27.08	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

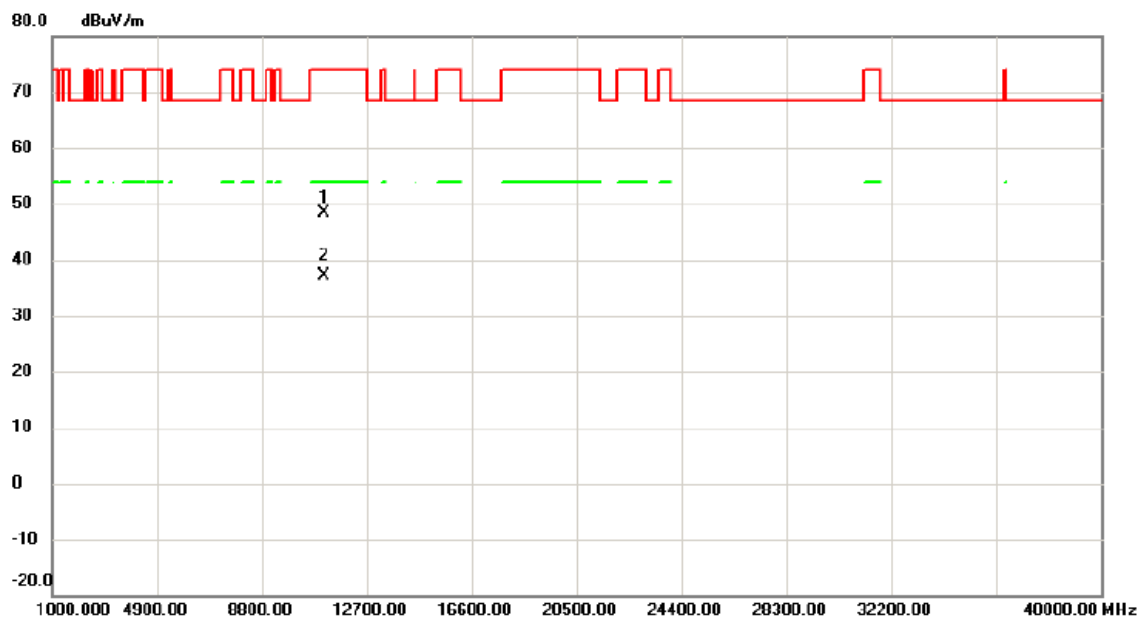

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	45.85	2.58	48.43	74.00	-25.57	peak	
2	*	11100.00	34.56	2.58	37.14	54.00	-16.86	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5670 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

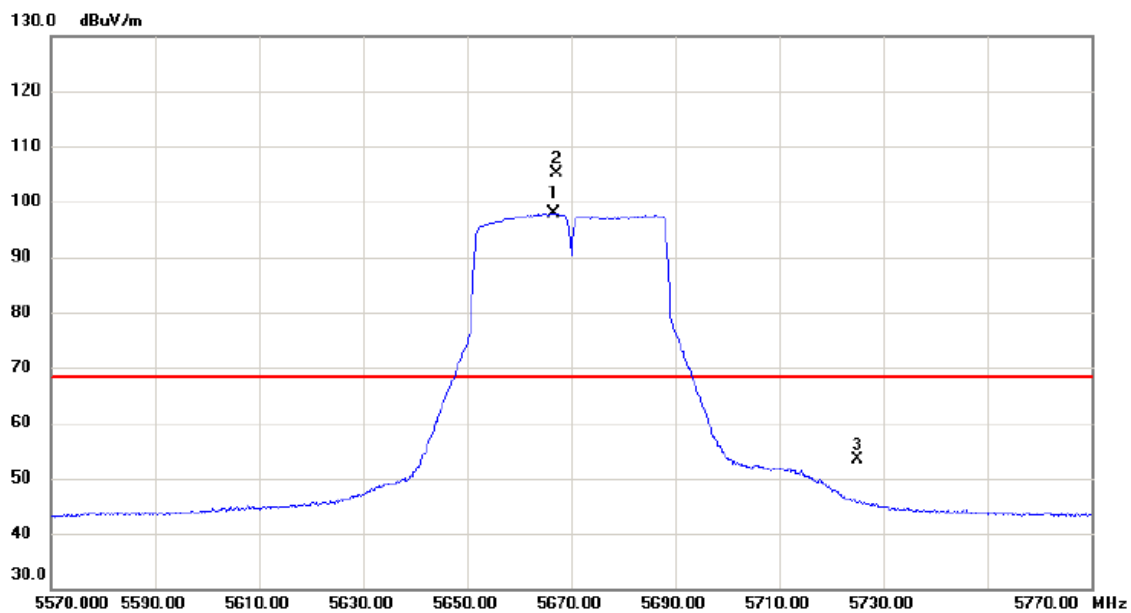

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5666.600	98.93	-1.03	97.90	68.30	29.60	AVG	主波訊號不予判定
2	*	5667.200	106.28	-1.03	105.25	68.30	36.95	peak	主波訊號不予判定
3		5725.000	54.29	-0.89	53.40	68.30	-14.90	peak	

測試頻道: IEEE 802.11n (40 MHz) /
5670 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

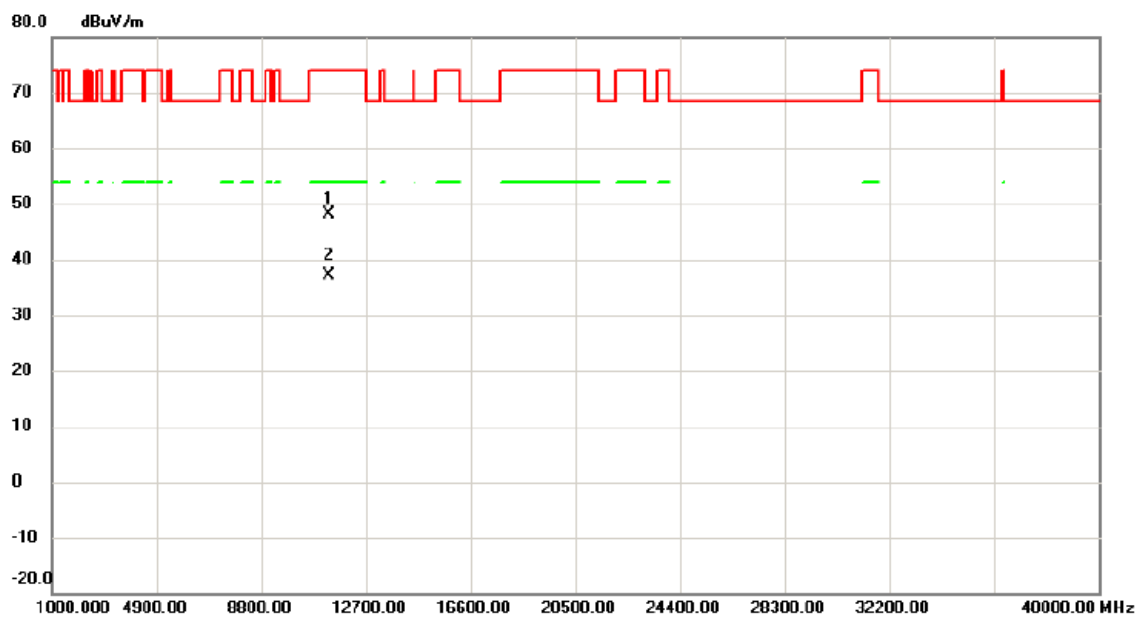

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	45.39	2.77	48.16	74.00	-25.84	peak	
2	*	11340.00	34.31	2.77	37.08	54.00	-16.92	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5670 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

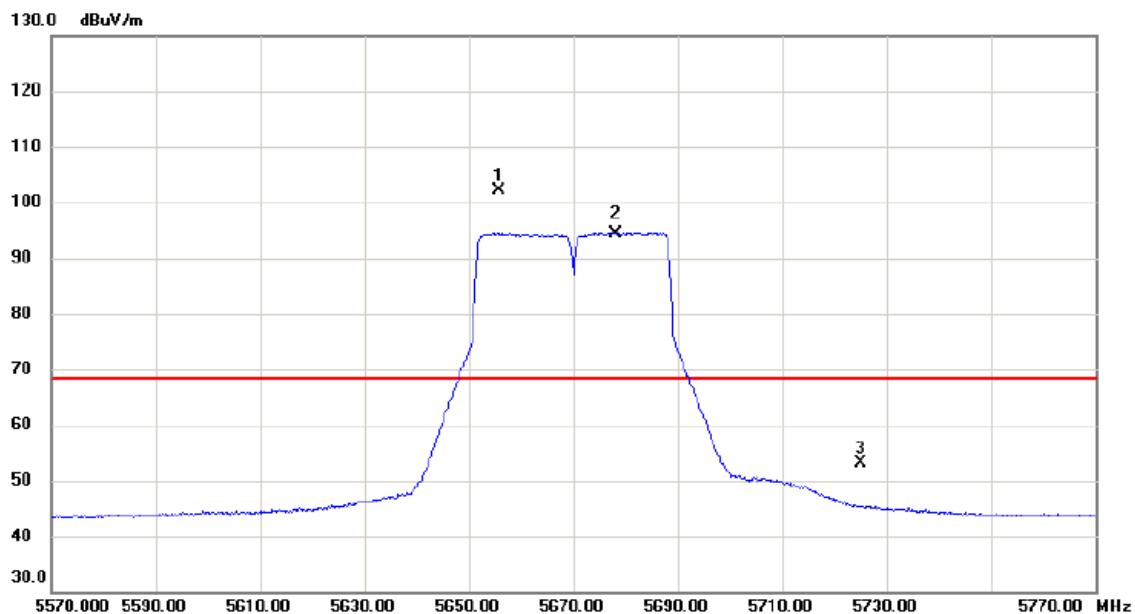

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5655.800	103.27	-1.07	102.20	68.30	33.90	peak	主波訊號不予判定
2	X	5678.000	95.49	-1.01	94.48	68.30	26.18	AVG	主波訊號不予判定
3		5725.000	54.03	-0.89	53.14	68.30	-15.16	peak	

測試頻道: IEEE 802.11n (40 MHz) /
5670 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

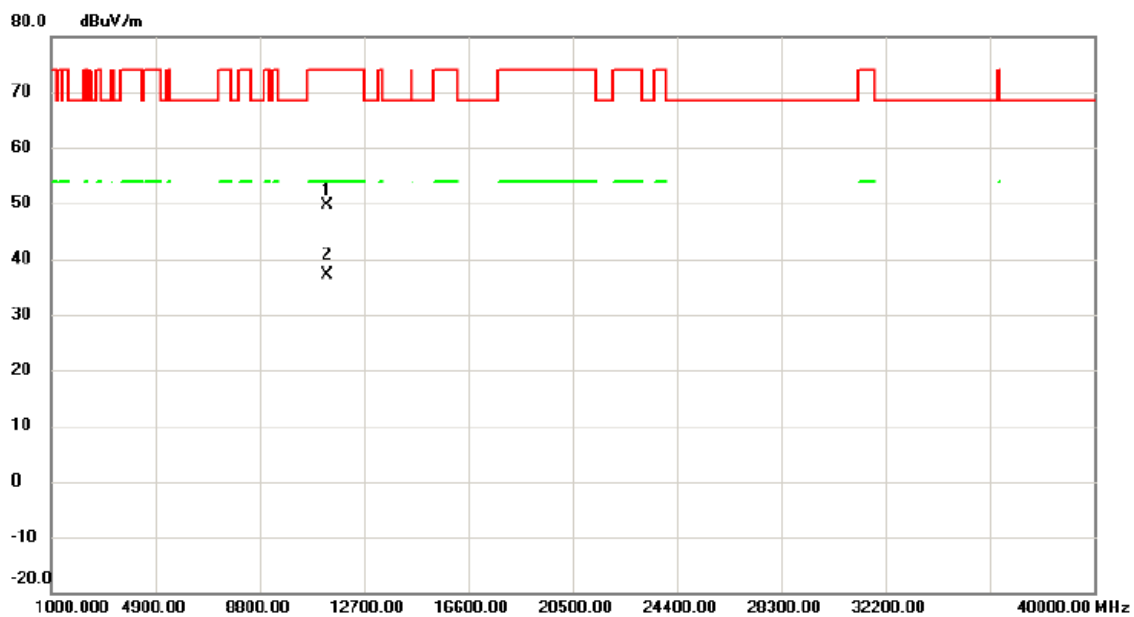


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	46.81	2.77	49.58	74.00	-24.42	peak	
2	*	11340.00	34.45	2.77	37.22	54.00	-16.78	AVG	

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

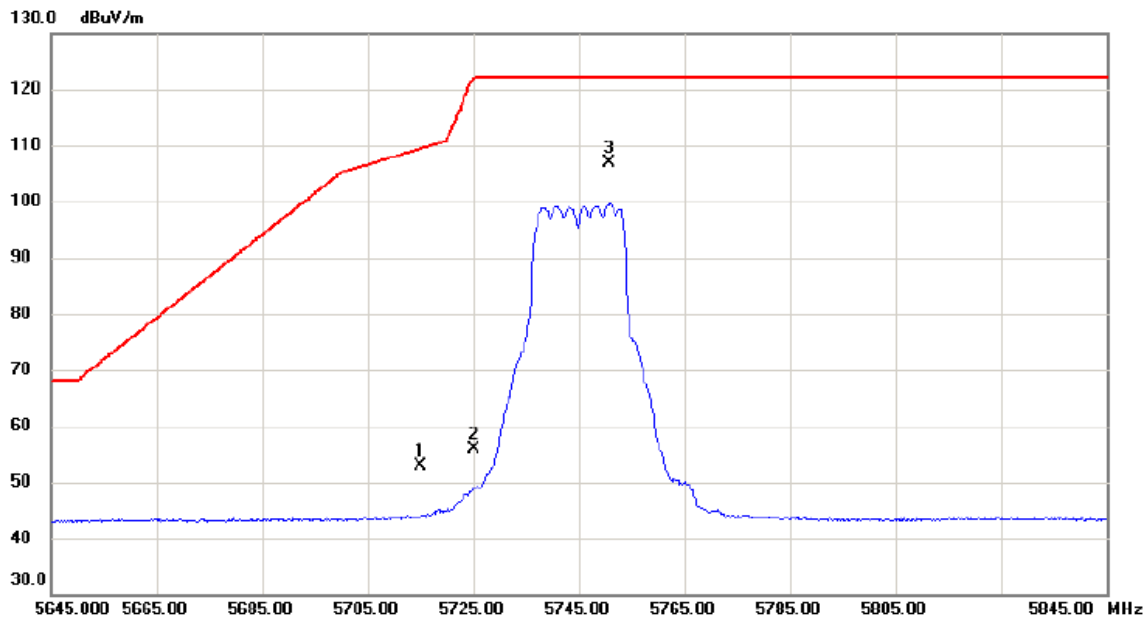


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5715.000	53.72	-0.92	52.80	109.40	-56.60	peak	
2		5725.000	56.65	-0.89	55.76	122.20	-66.44	peak	
3	*	5750.600	107.61	-0.82	106.79	122.20	-15.41	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

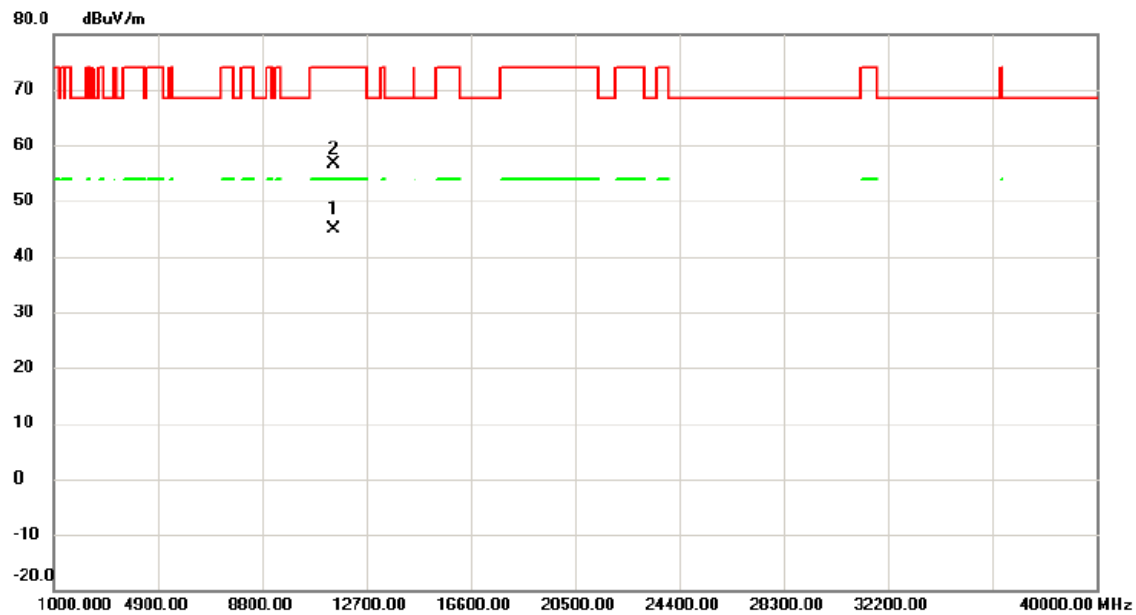


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11489.94	41.89	2.89	44.78	54.00	-9.22	AVG	
2		11490.64	53.72	2.89	56.61	74.00	-17.39	peak	

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

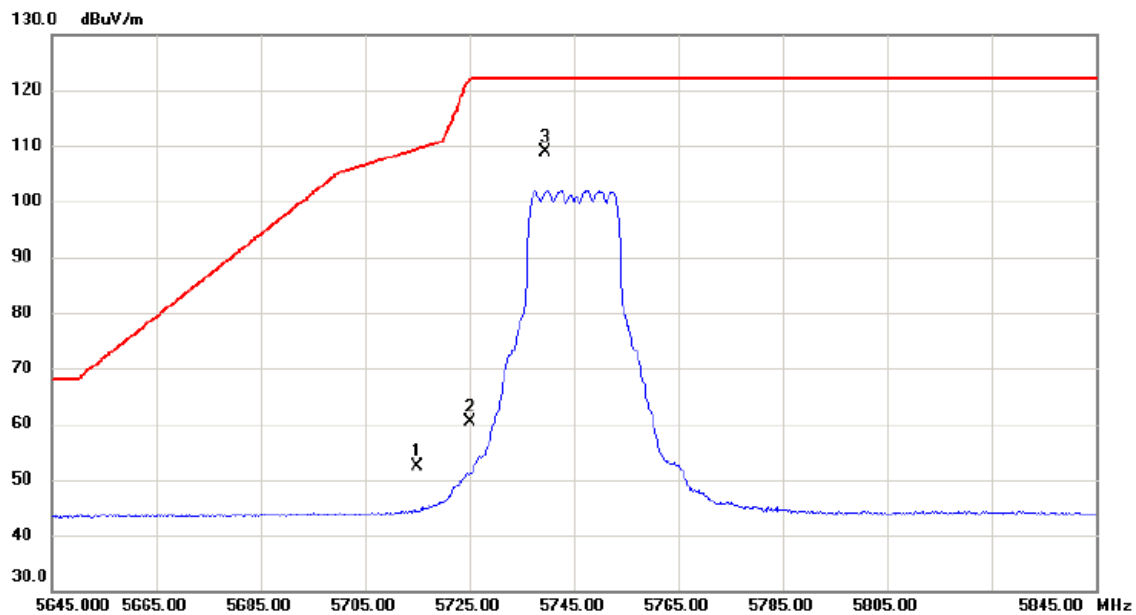


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	53.24	-0.92	52.32	109.40	-57.08	peak	
2		5725.000	61.32	-0.89	60.43	122.20	-61.77	peak	
3	*	5739.600	109.85	-0.85	109.00	122.20	-13.20	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

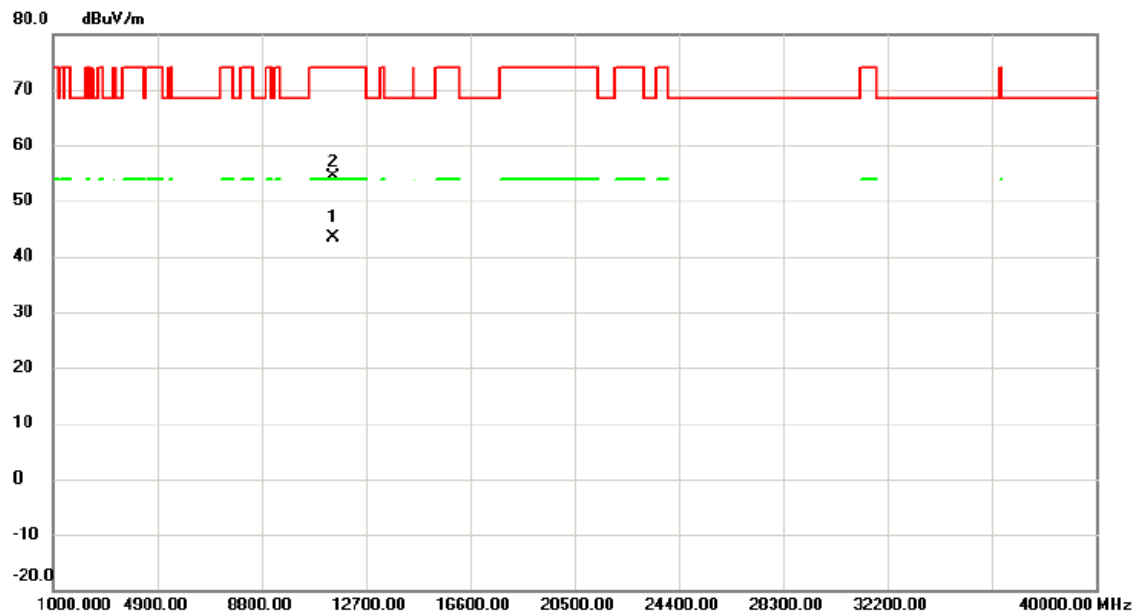


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment			Detector	Comment
1	*	11486.35	40.58	2.90	43.48	54.00	-10.52	AVG	
2		11486.70	51.55	2.90	54.45	74.00	-19.55	peak	

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

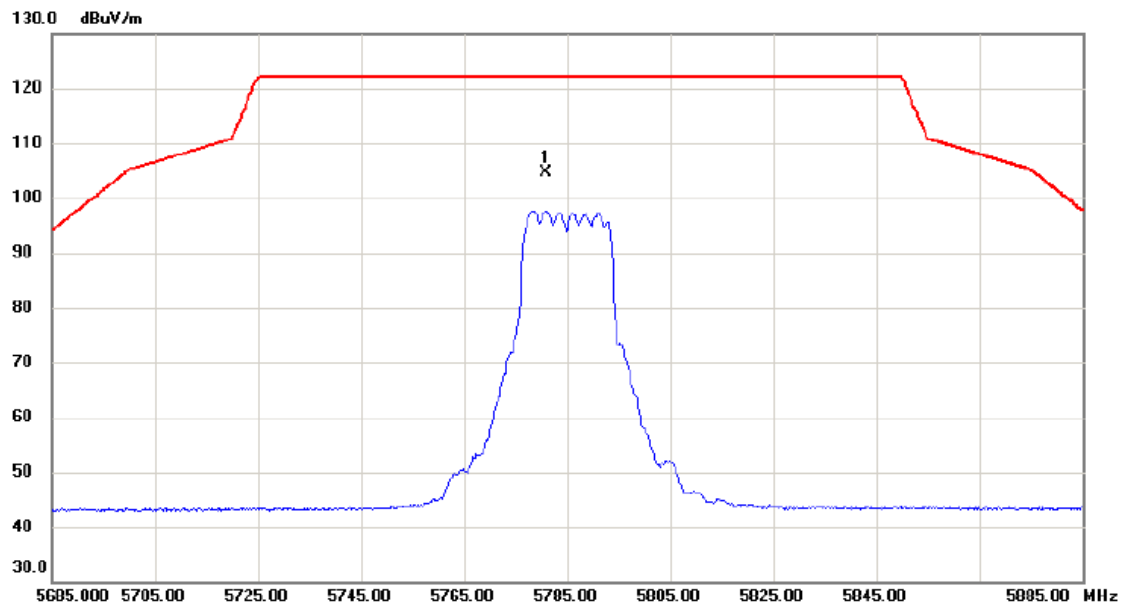


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5780.800	105.39	-0.75	104.64	122.20	-17.56	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

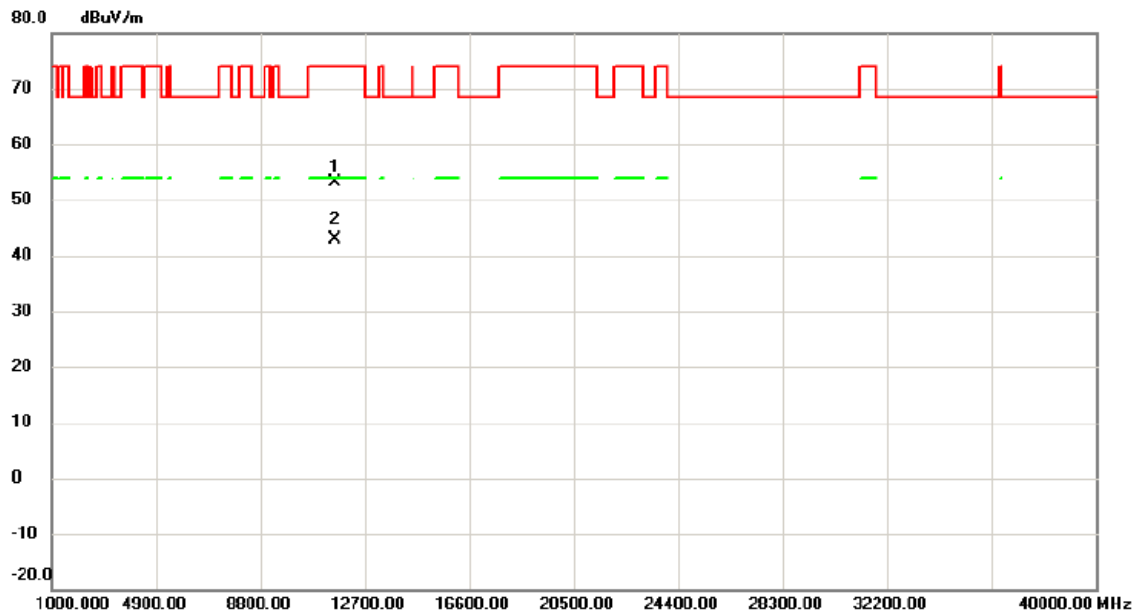


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11571.85	50.30	2.71	53.01	74.00	-20.99	peak	
2	*	11572.25	40.05	2.71	42.76	54.00	-11.24	AVG	

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

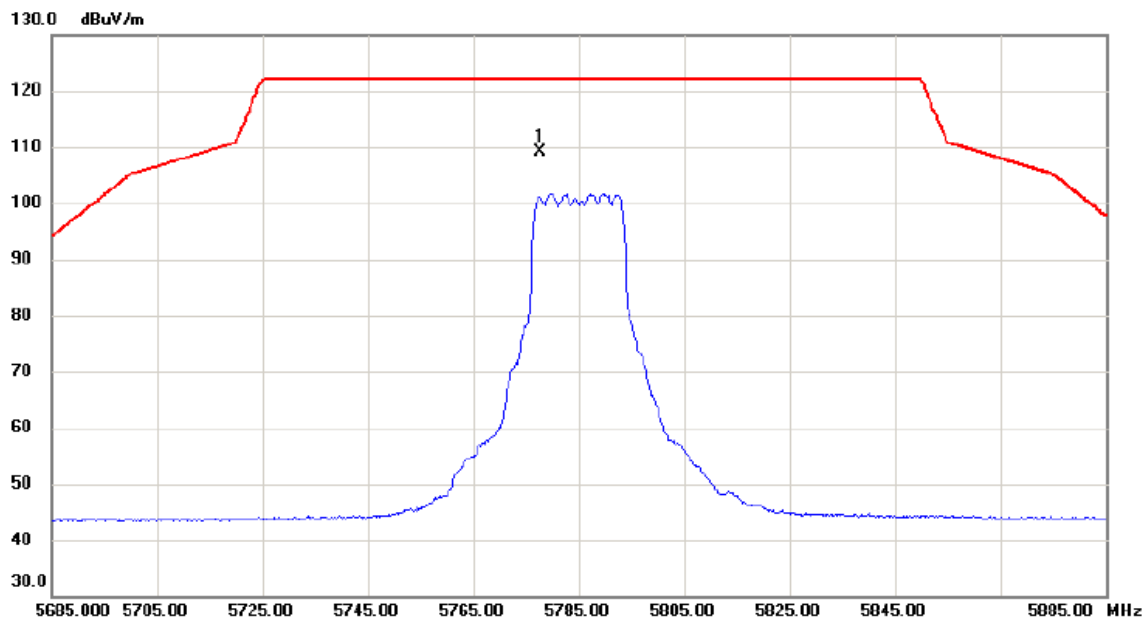


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5777.600	109.77	-0.76	109.01	122.20	-13.19	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

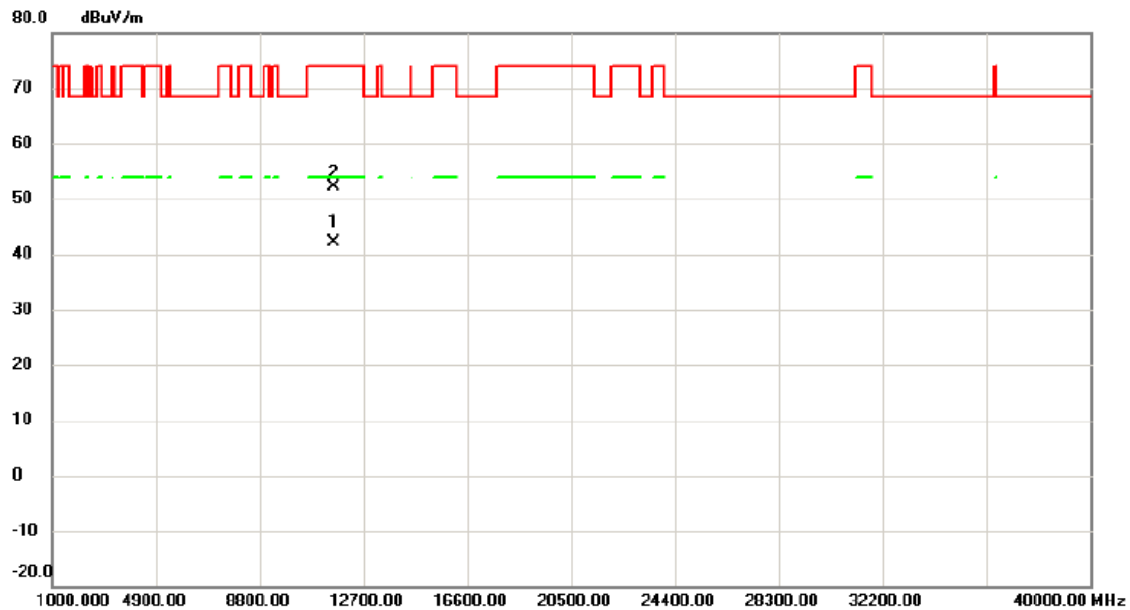

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11570.35	39.43	2.72	42.15	54.00	-11.85	AVG	
2		11573.05	49.39	2.71	52.10	74.00	-21.90	peak	

測試頻道: IEEE 802.11a / 5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

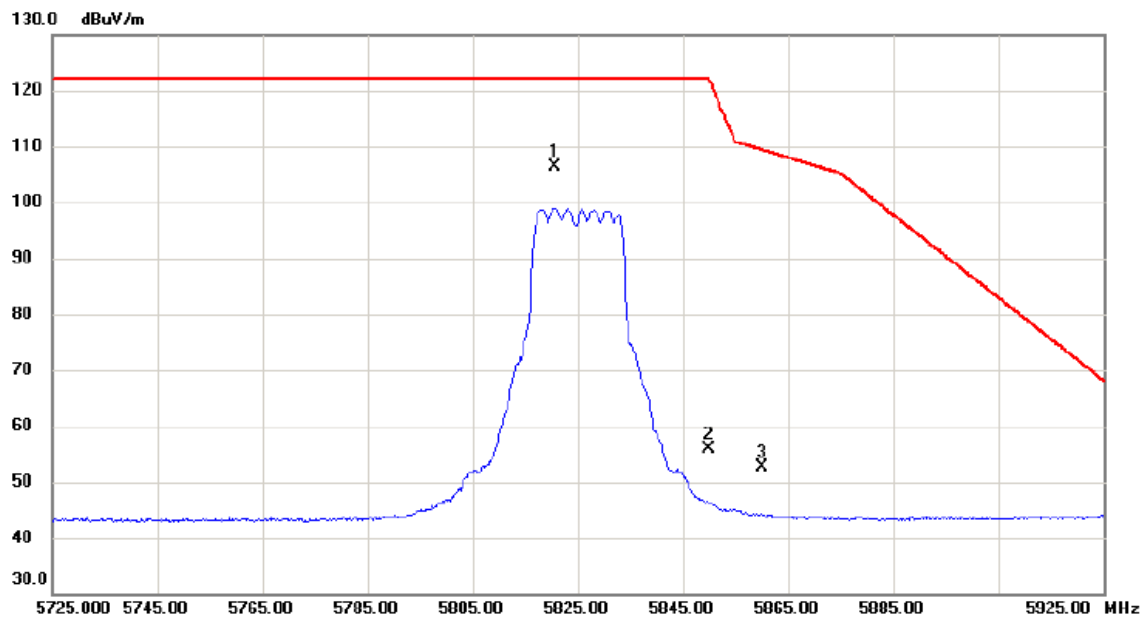


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5820.600	107.01	-0.65	106.36	122.20	-15.84	peak	主波訊號不予判定
2		5850.000	56.33	-0.57	55.76	122.20	-66.44	peak	
3		5860.000	53.18	-0.54	52.64	109.40	-56.76	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

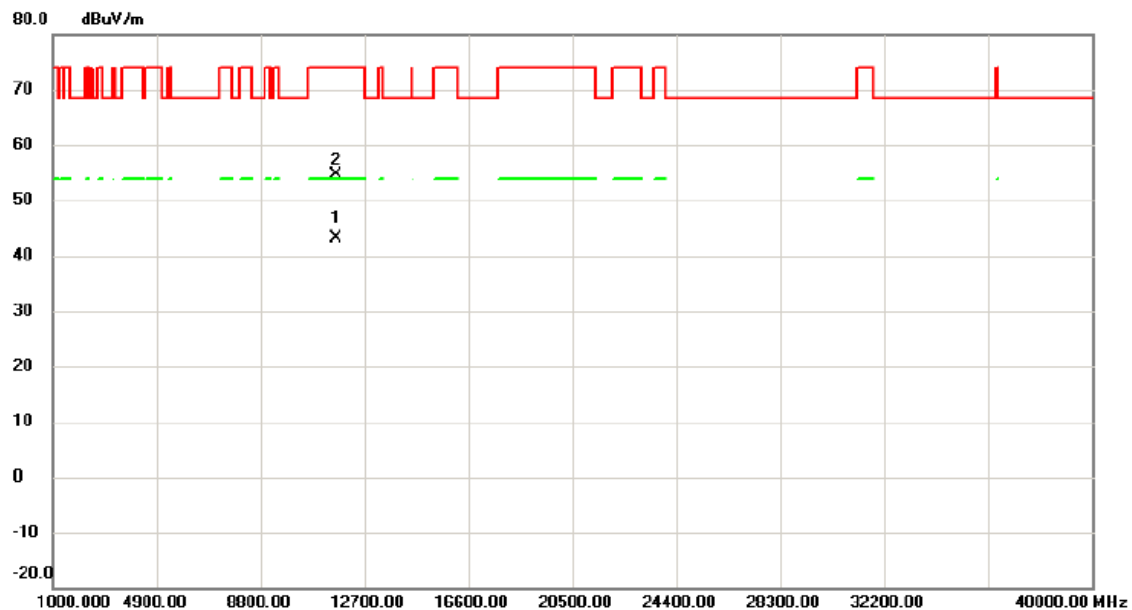


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11649.40	40.71	2.50	43.21	54.00	-10.79	AVG	
2		11651.25	52.15	2.50	54.65	74.00	-19.35	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

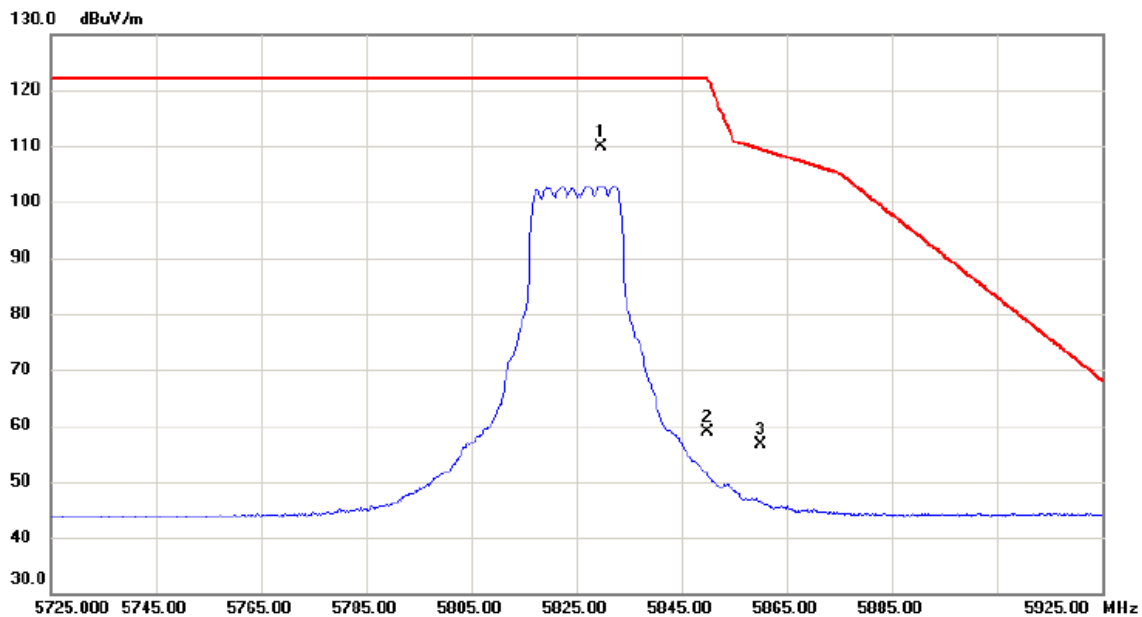

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5829.600	110.54	-0.62	109.92	122.20	-12.28	peak	主波訊號不予判定
2		5850.000	59.41	-0.57	58.84	122.20	-63.36	peak	
3		5860.000	57.05	-0.54	56.51	109.40	-52.89	peak	

測試頻道: IEEE 802.11a / 5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

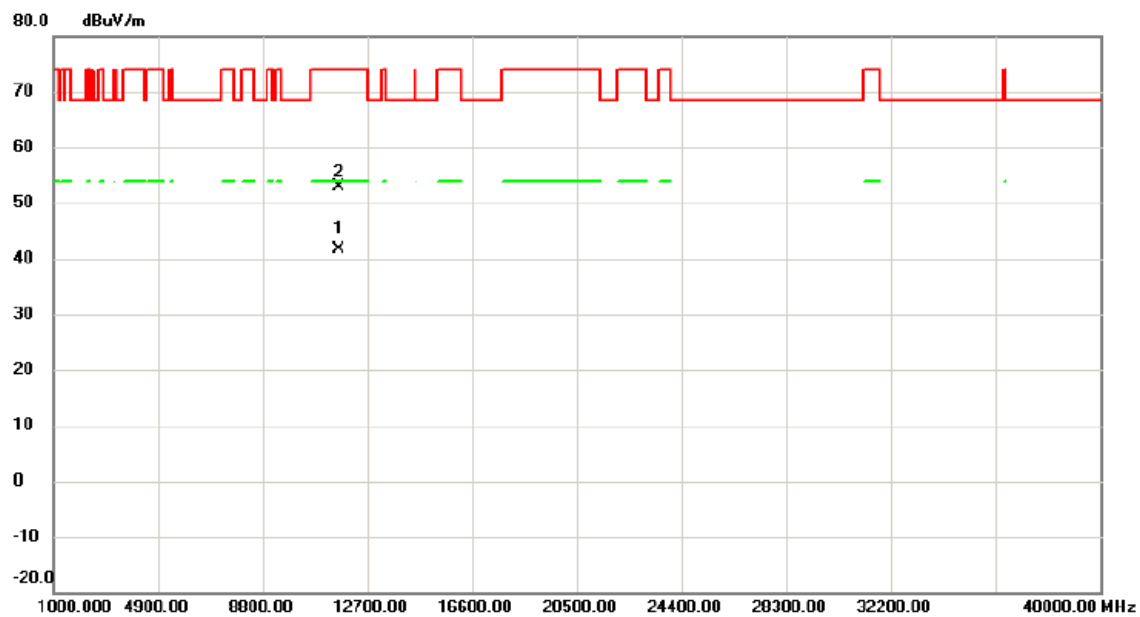

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Comment
1	*	11649.85	39.12	2.50	41.62	54.00	-12.38	AVG	
2		11651.00	50.33	2.50	52.83	74.00	-21.17	peak	

測試頻道: IEEE 802.11n (20 MHz) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

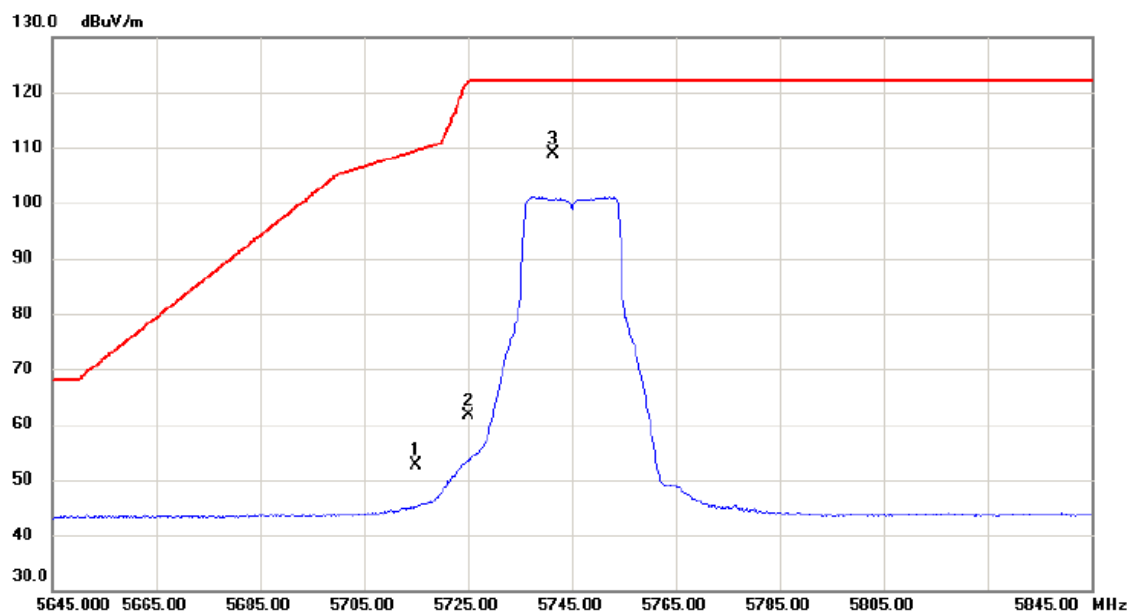

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	53.62	-0.92	52.70	109.40	-56.70	peak	
2		5725.000	62.56	-0.89	61.67	122.20	-60.53	peak	
3	*	5741.400	109.73	-0.84	108.89	122.20	-13.31	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

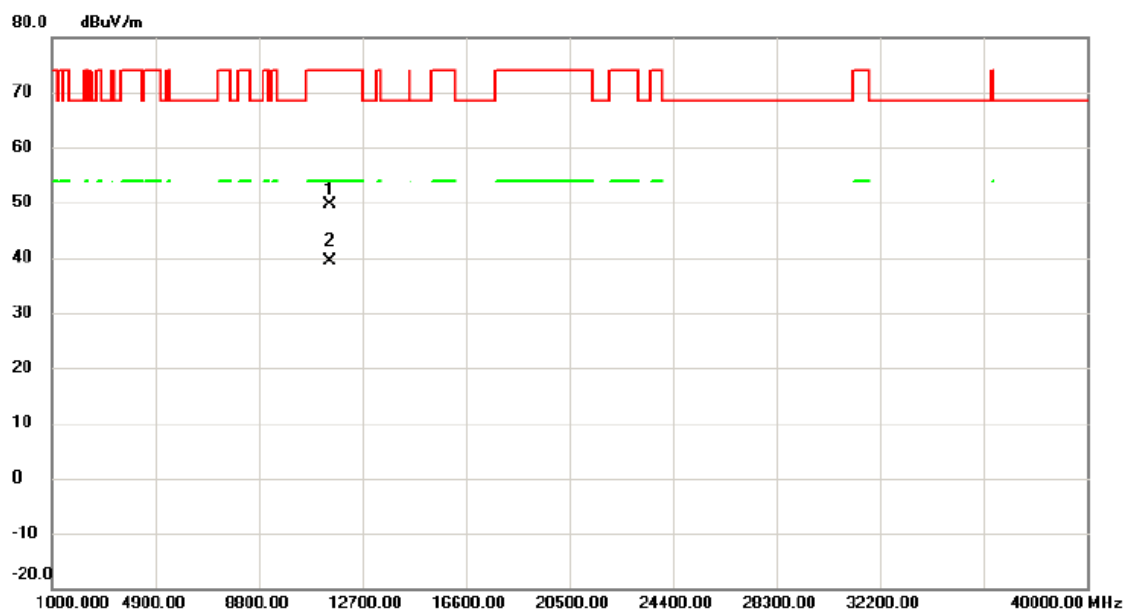

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11482.75	46.72	2.90	49.62	74.00	-24.38	peak	
2	*	11488.70	36.48	2.89	39.37	54.00	-14.63	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

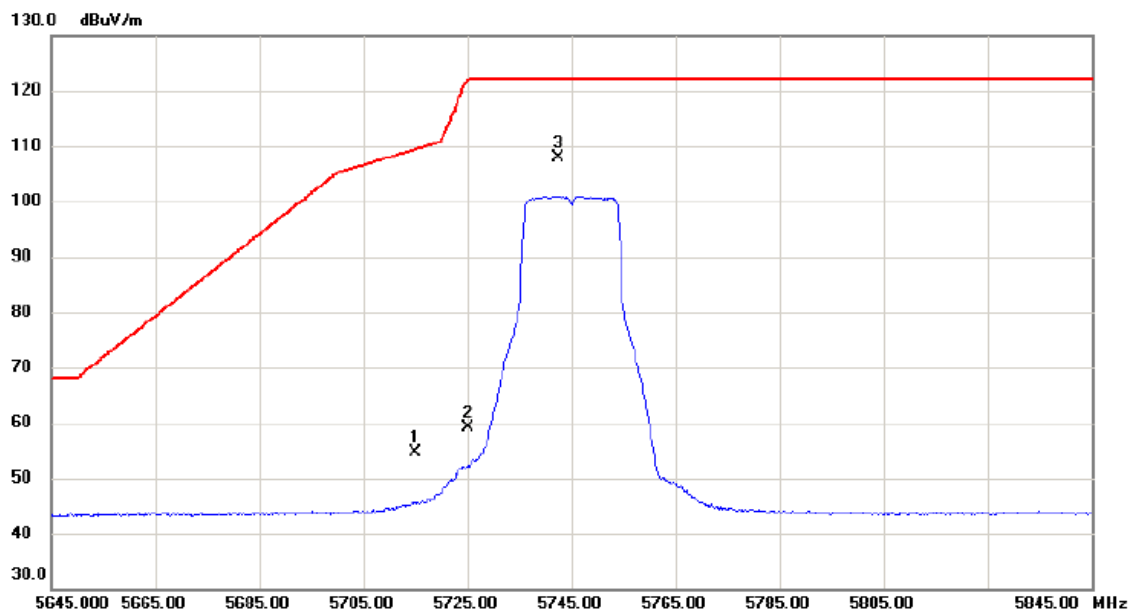

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	55.47	-0.92	54.55	109.40	-54.85	peak	
2		5725.000	59.98	-0.89	59.09	122.20	-63.11	peak	
3	*	5742.400	108.67	-0.84	107.83	122.20	-14.37	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

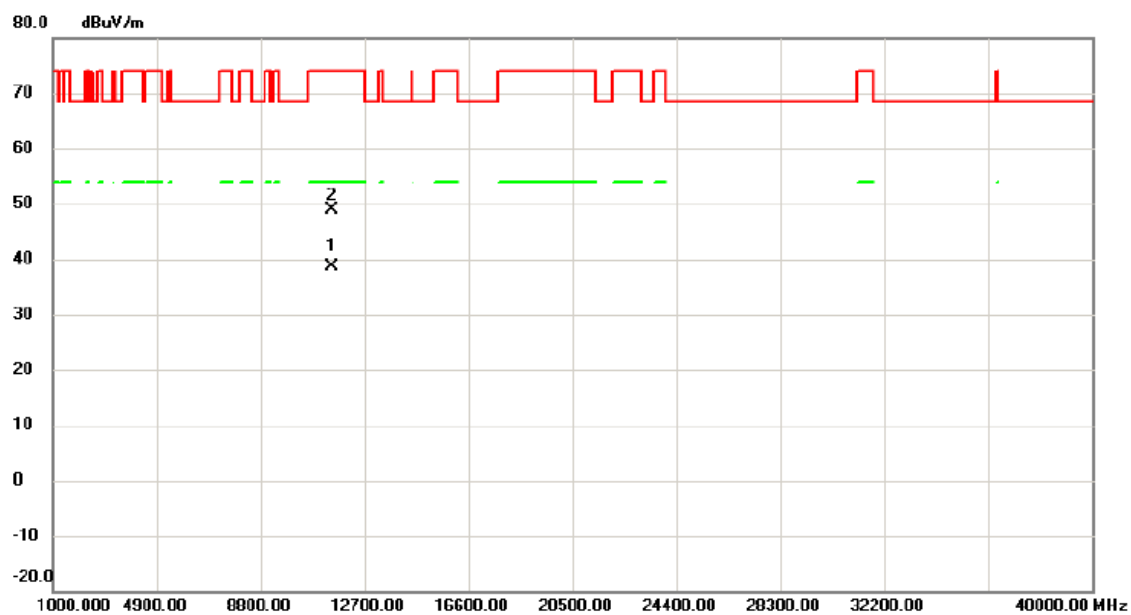

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11489.70	35.75	2.89	38.64	54.00	-15.36	AVG	
2		11495.55	45.98	2.91	48.89	74.00	-25.11	peak	

測試頻道: IEEE 802.11n (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

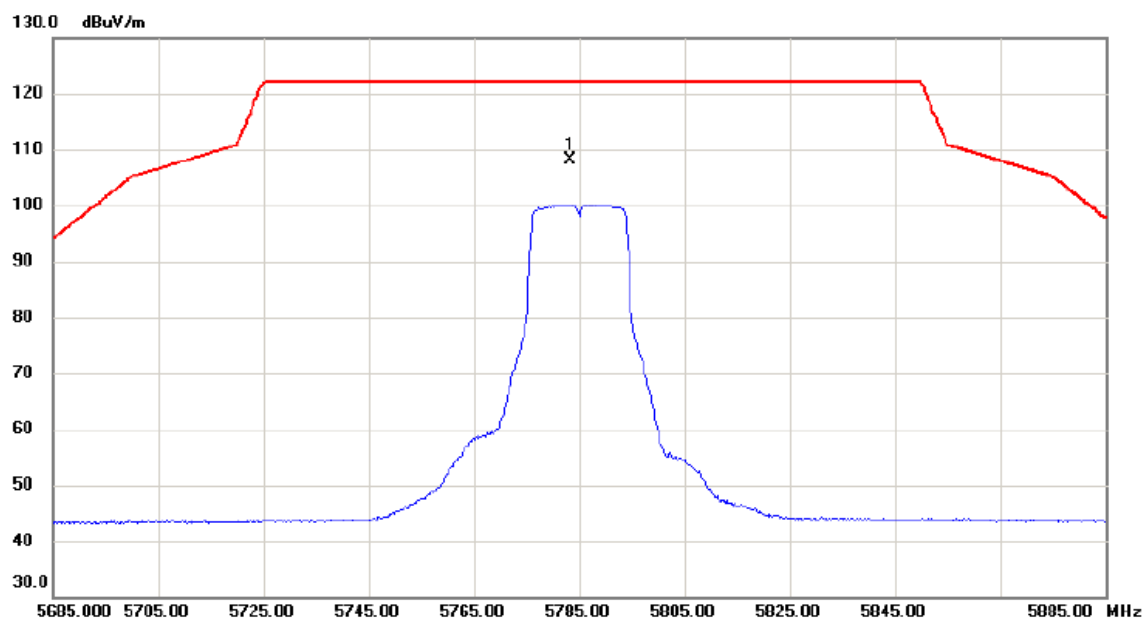

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5783.400	108.76	-0.74	108.02	122.20	-14.18	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

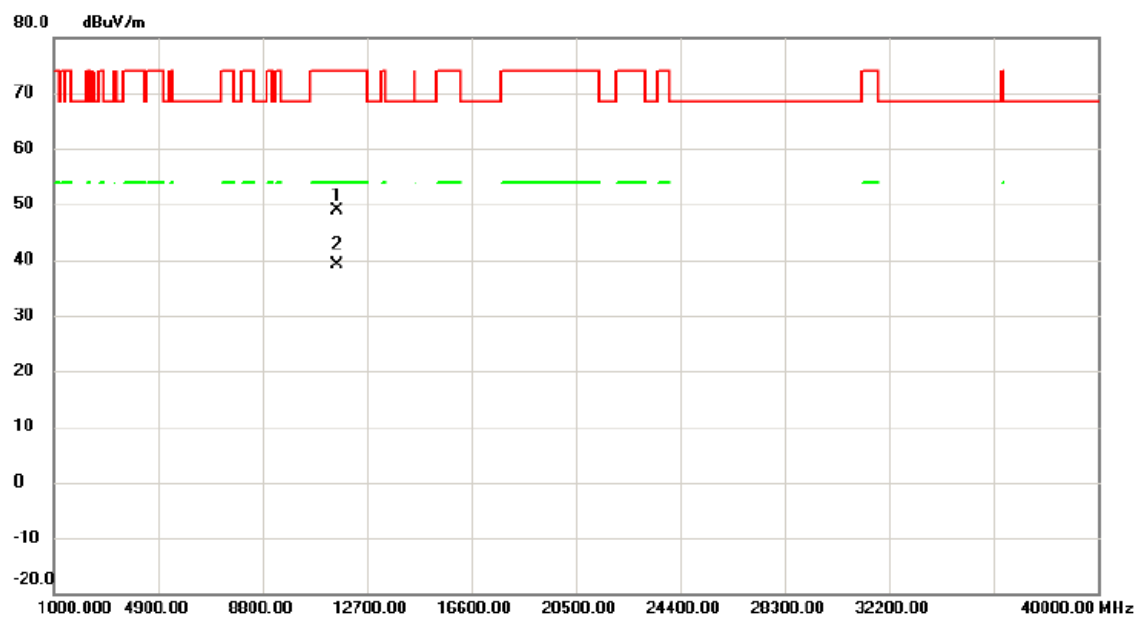

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11565.45	46.16	2.74	48.90	74.00	-25.10	peak	
2	*	11566.00	36.29	2.73	39.02	54.00	-14.98	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

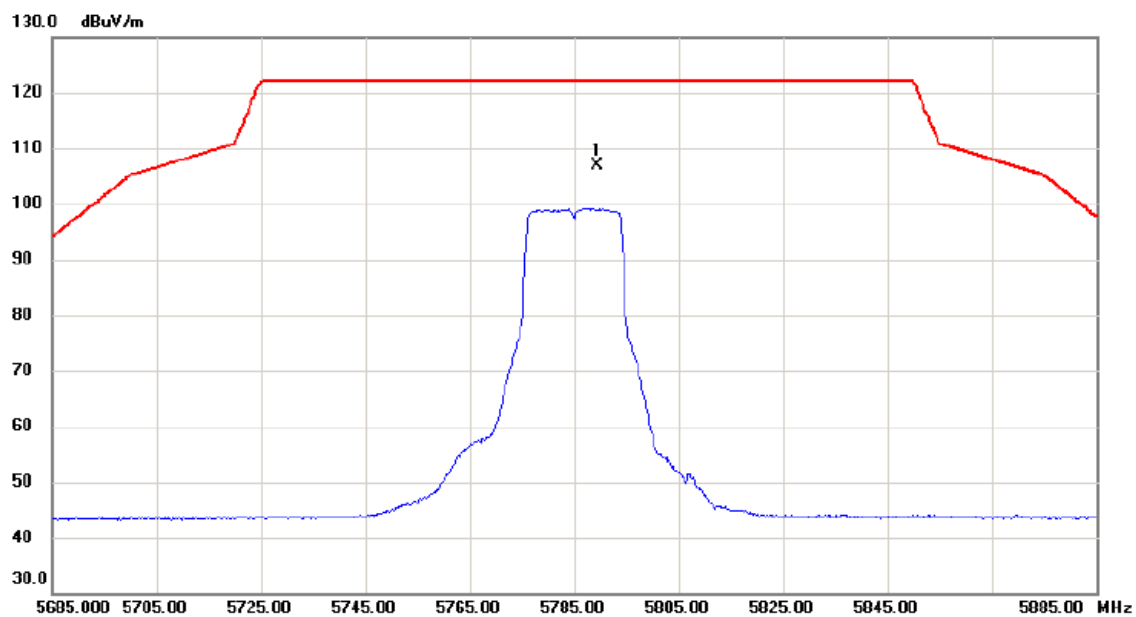

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5789.400	107.69	-0.73	106.96	122.20	-15.24	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

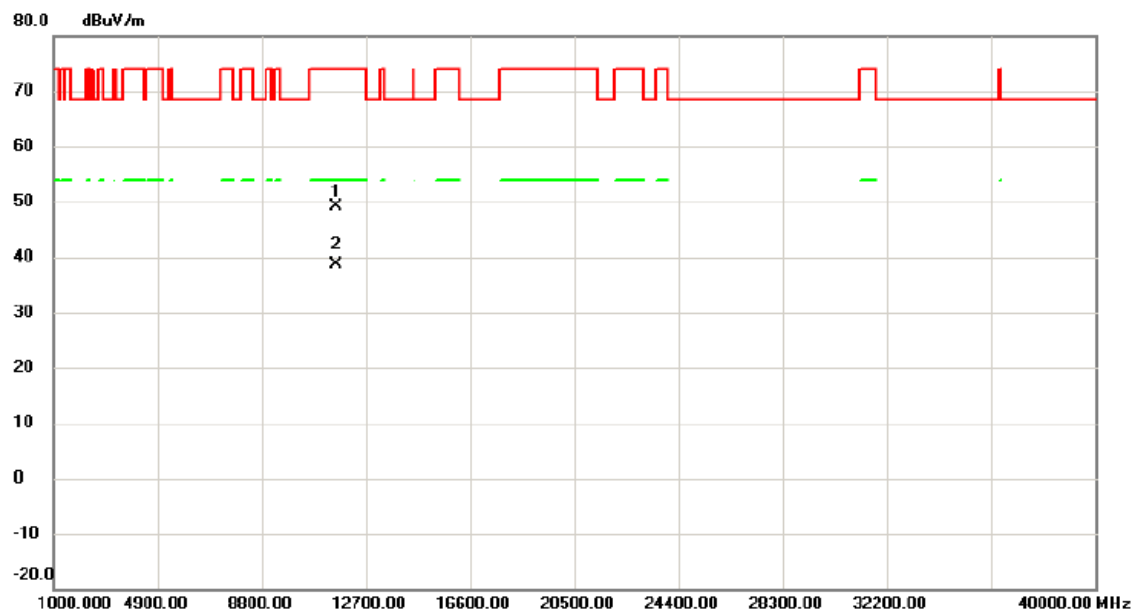

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11563.60	46.47	2.74	49.21	74.00	-24.79	peak	
2	*	11567.20	36.01	2.73	38.74	54.00	-15.26	AVG	

測試頻道: IEEE 802.11n (20 MHz) / 5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

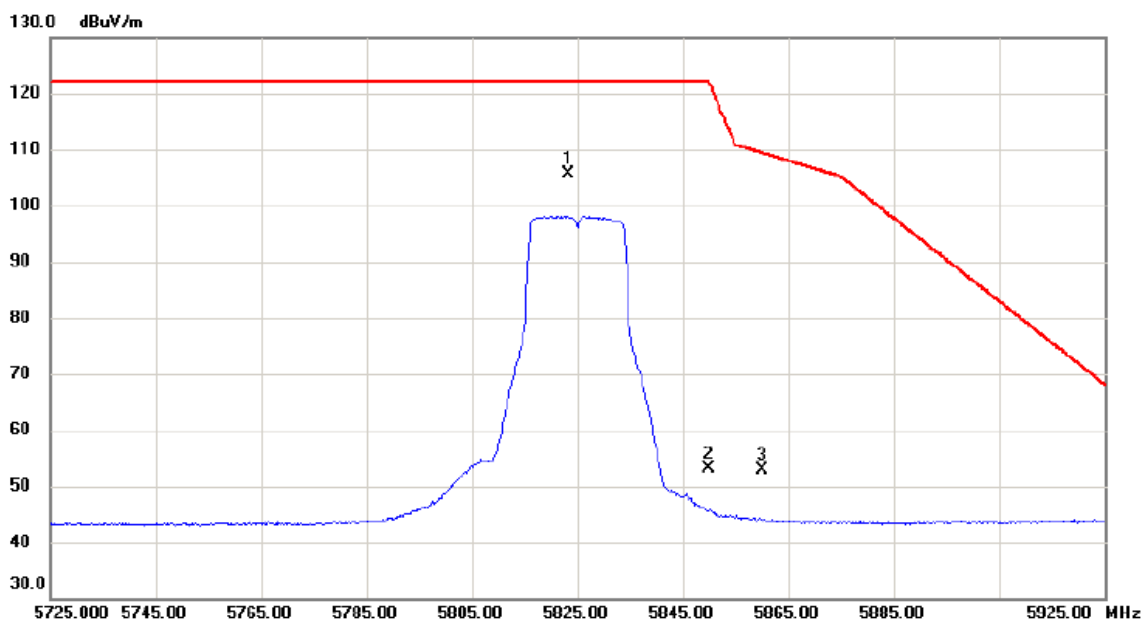

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5823.400	106.22	-0.63	105.59	122.20	-16.61	peak	主波訊號不予判定
2		5850.000	53.63	-0.57	53.06	122.20	-69.14	peak	
3		5860.000	53.42	-0.54	52.88	109.40	-56.52	peak	

測試頻道: IEEE 802.11n (20 MHz) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

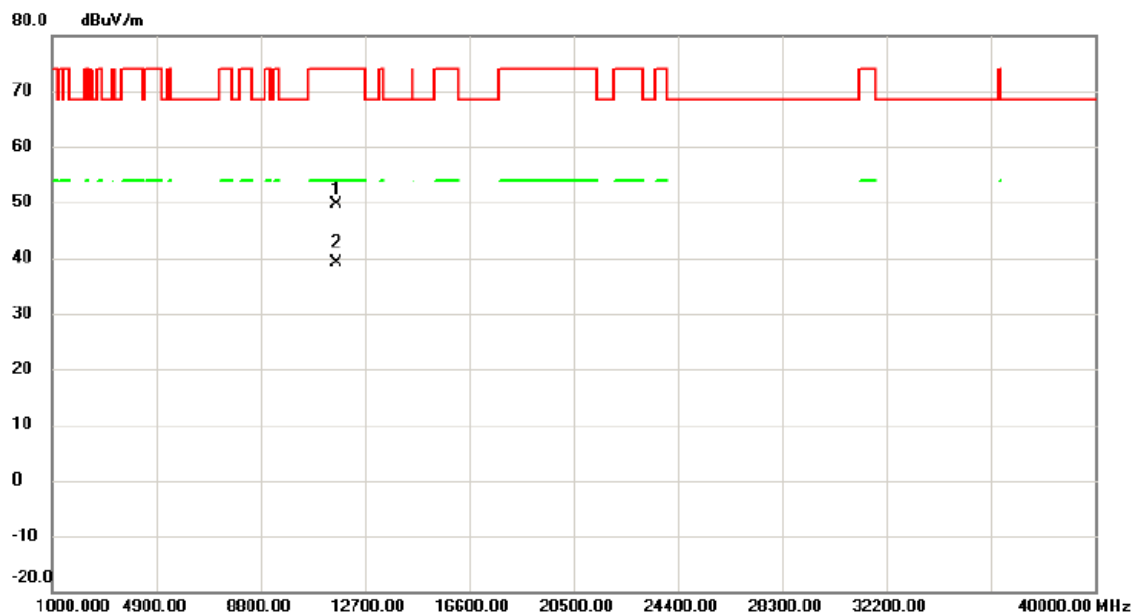

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11645.20	47.03	2.51	49.54	74.00	-24.46	peak	
2	*	11655.00	36.60	2.49	39.09	54.00	-14.91	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

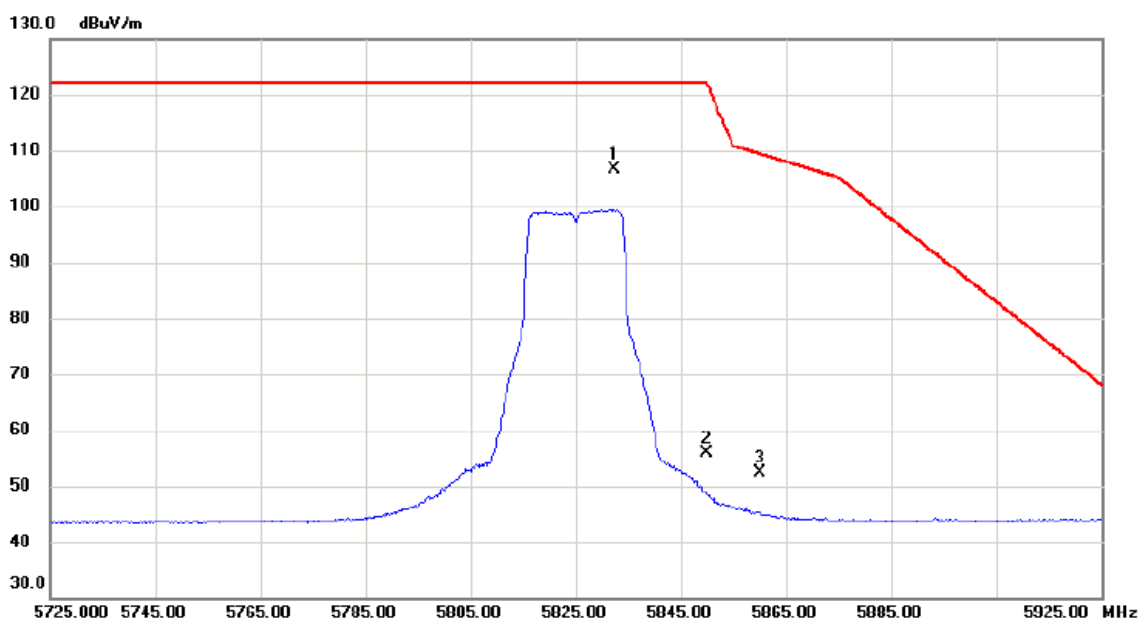

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5832.400	107.15	-0.62	106.53	122.20	-15.67	peak	主波訊號不予判定
2		5850.000	56.52	-0.57	55.95	122.20	-66.25	peak	
3		5860.000	52.83	-0.54	52.29	109.40	-57.11	peak	

測試頻道: IEEE 802.11n (20 MHz) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

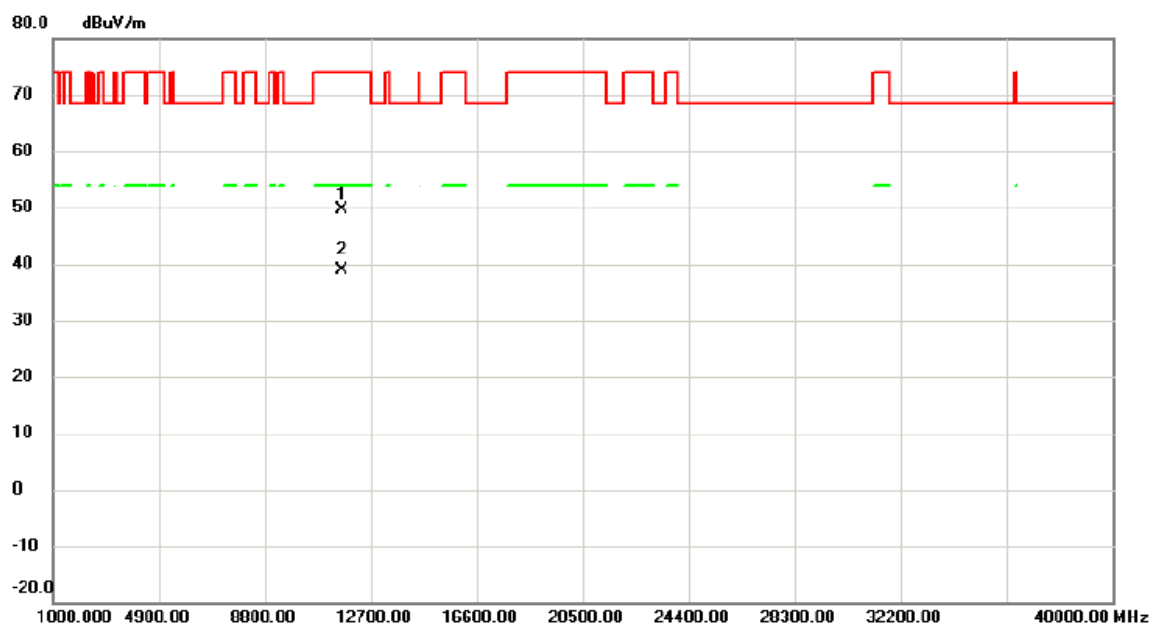

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11644.40	47.22	2.51	49.73	74.00	-24.27	peak	
2	*	11647.75	36.49	2.50	38.99	54.00	-15.01	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

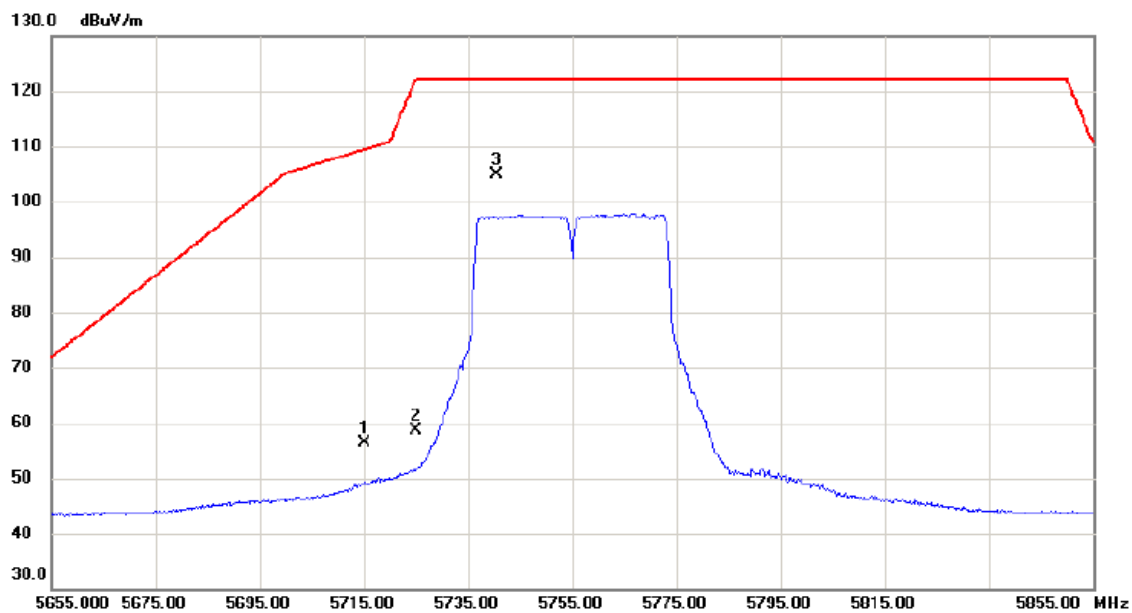

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		5715.000	57.34	-0.92	56.42	109.40	-52.98	peak
2		5725.000	59.61	-0.89	58.72	122.20	-63.48	peak
3	*	5740.400	105.68	-0.85	104.83	122.20	-17.37	peak 主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

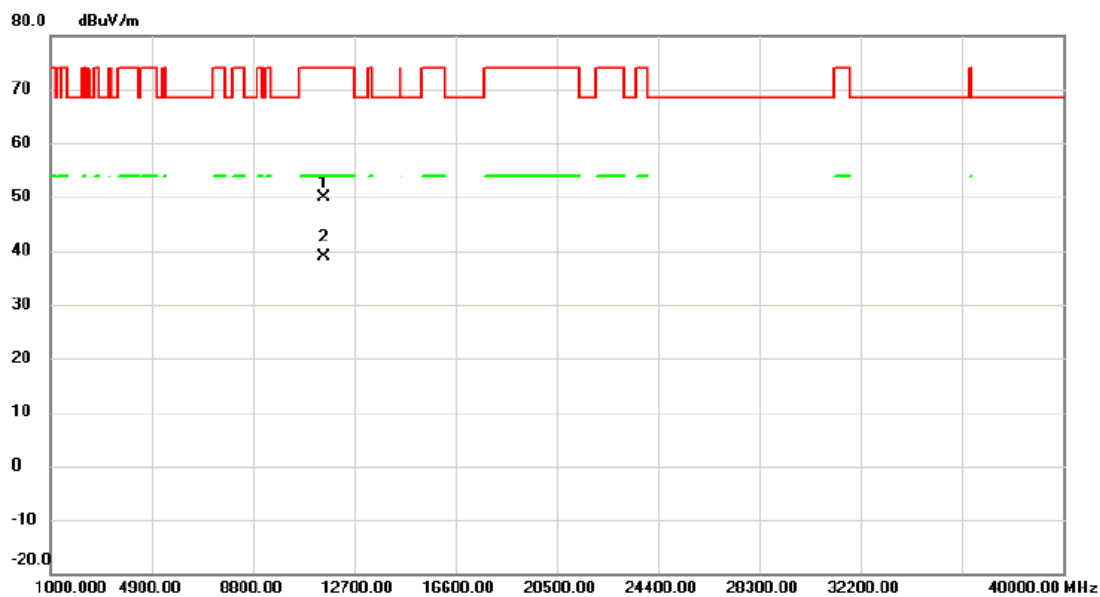

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11508.96	46.95	2.88	49.83	74.00	-24.17	peak	
2	*	11509.72	36.09	2.88	38.97	54.00	-15.03	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

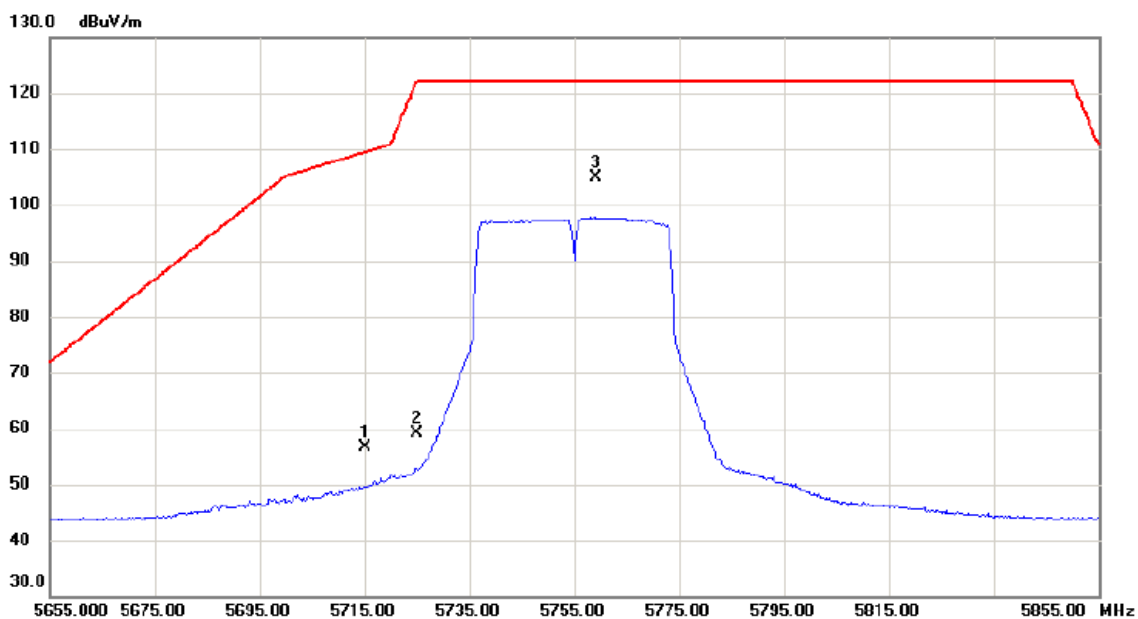

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5715.000	57.44	-0.92	56.52	109.40	-52.88	peak	
2		5725.000	59.97	-0.89	59.08	122.20	-63.12	peak	
3	*	5759.200	105.62	-0.81	104.81	122.20	-17.39	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

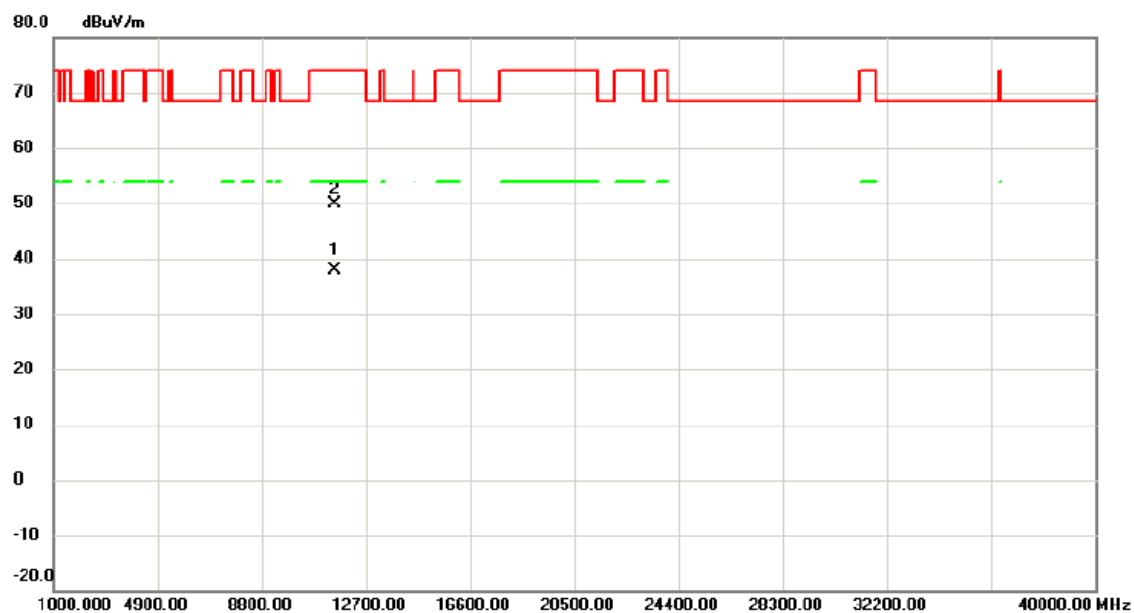

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11509.26	35.04	2.88	37.92	54.00	-16.08	AVG	
2		11509.59	47.08	2.88	49.96	74.00	-24.04	peak	

測試頻道: IEEE 802.11n (40 MHz) / 5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

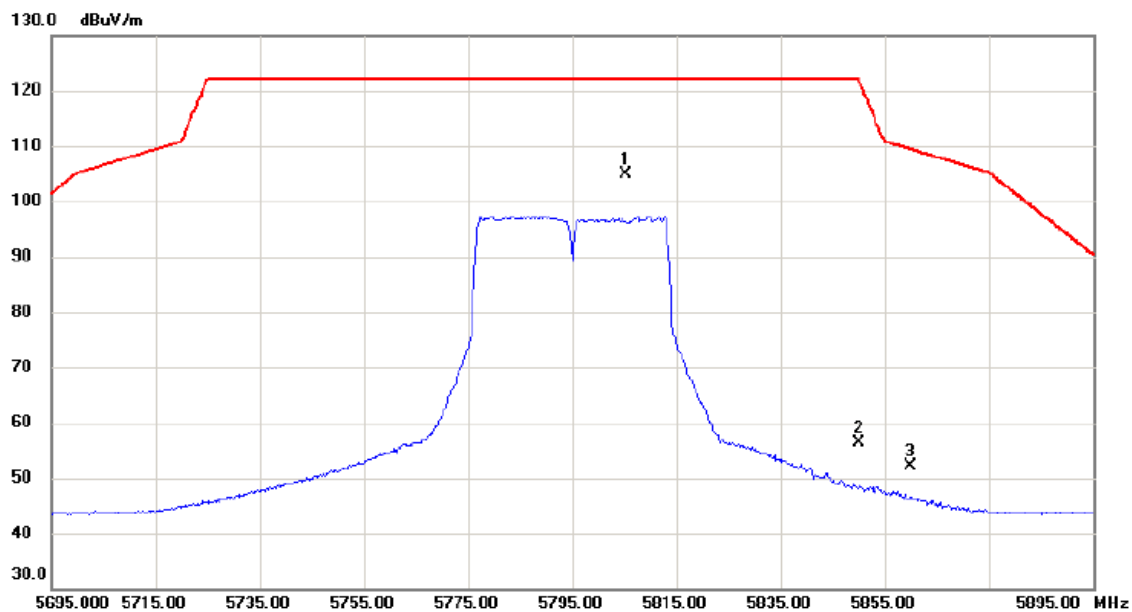

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5805.200	105.54	-0.68	104.86	122.20	-17.34	peak	主波訊號不予判定
2		5850.000	56.95	-0.57	56.38	122.20	-65.82	peak	
3		5860.000	52.73	-0.54	52.19	109.40	-57.21	peak	

測試頻道: IEEE 802.11n (40 MHz) /
5795 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

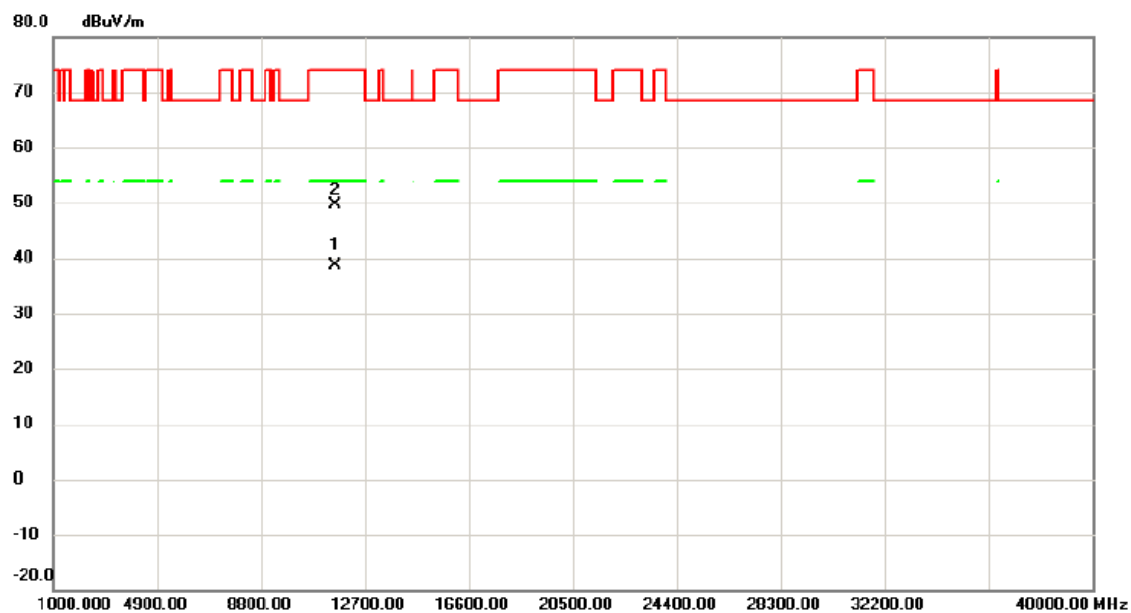

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11589.97	35.90	2.67	38.57	54.00	-15.43	AVG	
2		11590.42	46.99	2.67	49.66	74.00	-24.34	peak	

測試頻道: IEEE 802.11n (40 MHz) /
5795 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

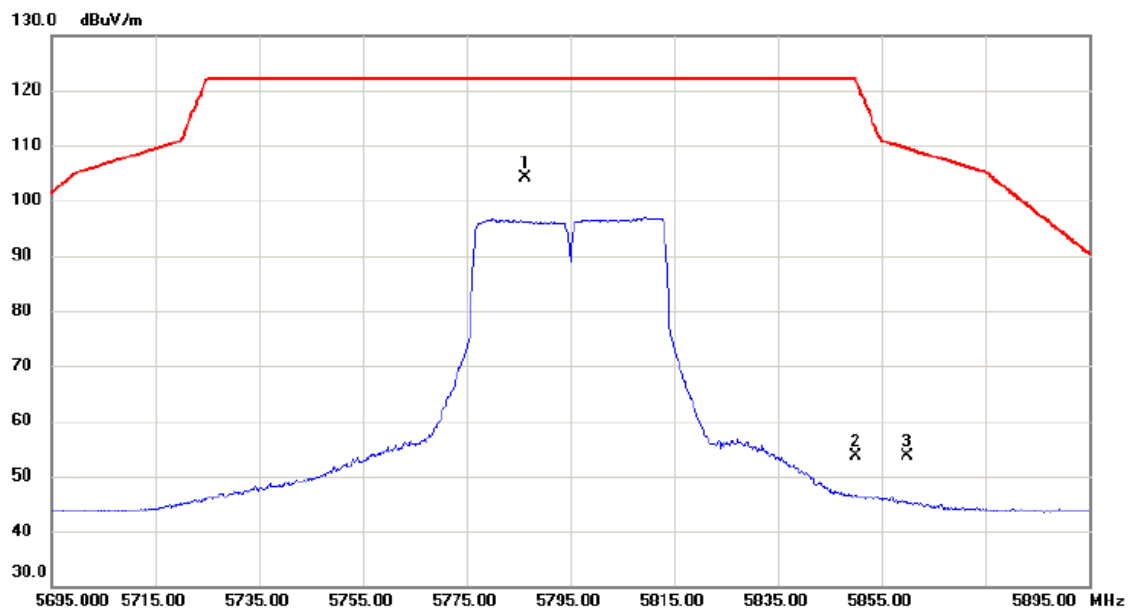

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5786.400	104.90	-0.73	104.17	122.20	-18.03	peak	主波訊號不予判定
2		5850.000	54.28	-0.57	53.71	122.20	-68.49	peak	
3		5860.000	54.20	-0.54	53.66	109.40	-55.74	peak	

測試頻道: IEEE 802.11n (40 MHz) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

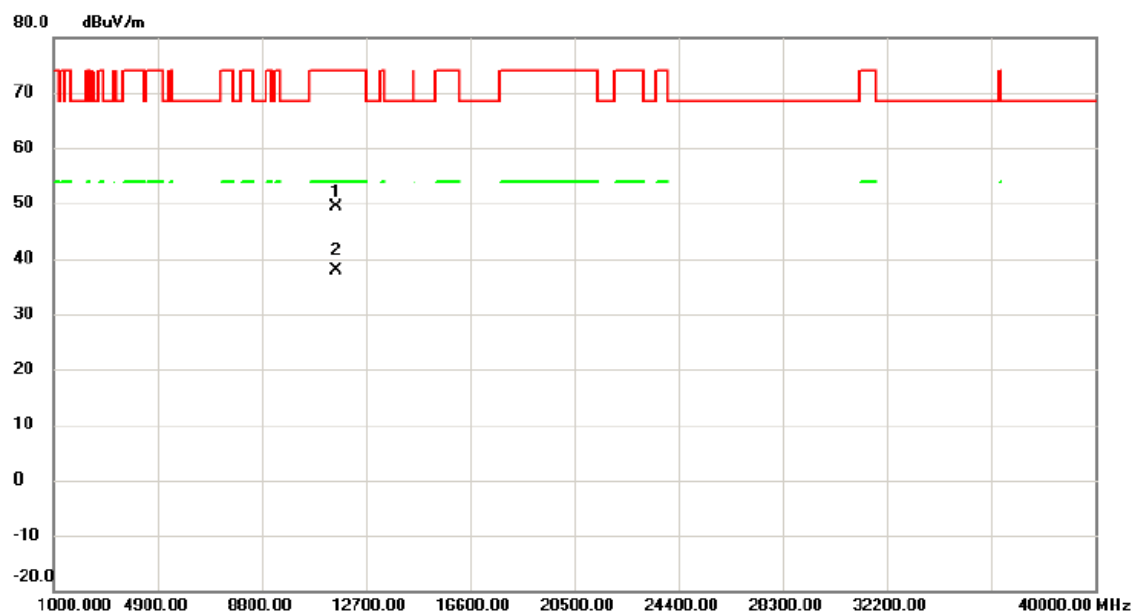

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11589.00	46.75	2.67	49.42	74.00	-24.58	peak	
2	*	11592.23	35.29	2.66	37.95	54.00	-16.05	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

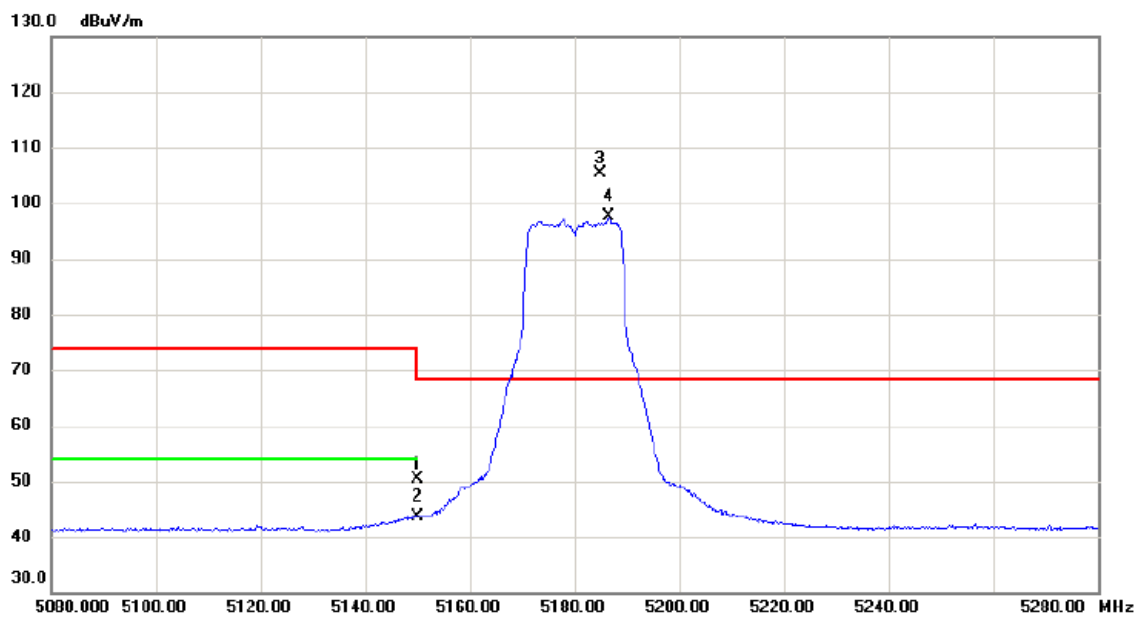

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	52.02	-1.71	50.31	74.00	-23.69	peak	
2		5150.000	45.43	-1.71	43.72	54.00	-10.28	AVG	
3	*	5185.000	107.03	-1.70	105.33	68.30	37.03	peak	主波訊號不予判定
4	X	5186.600	99.23	-1.70	97.53	68.30	29.23	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

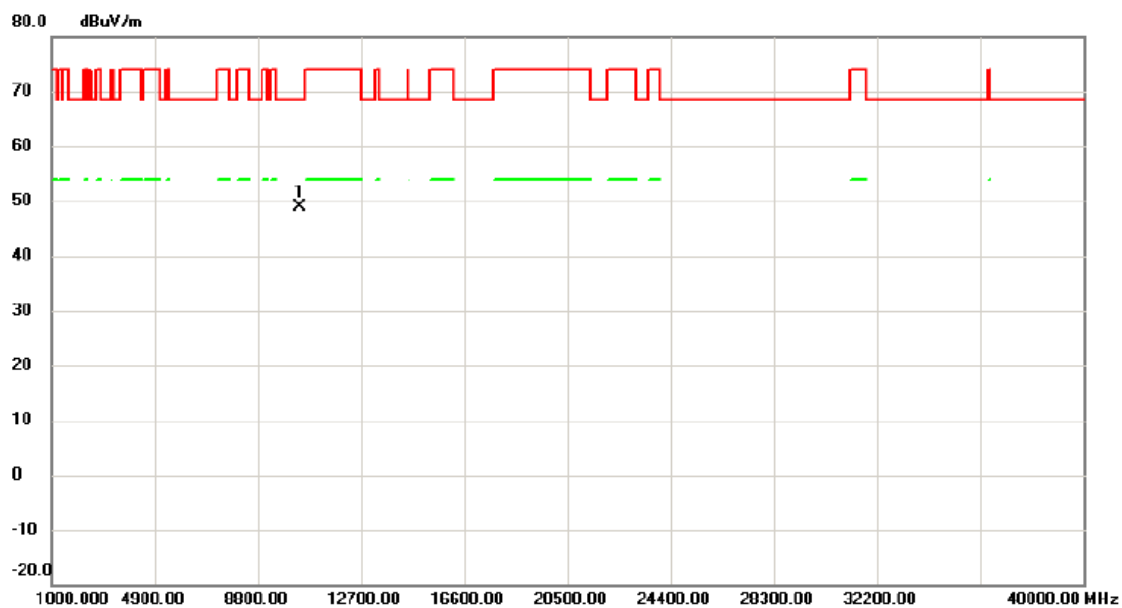

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10364.94	47.26	1.58	48.84	68.30	-19.46	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

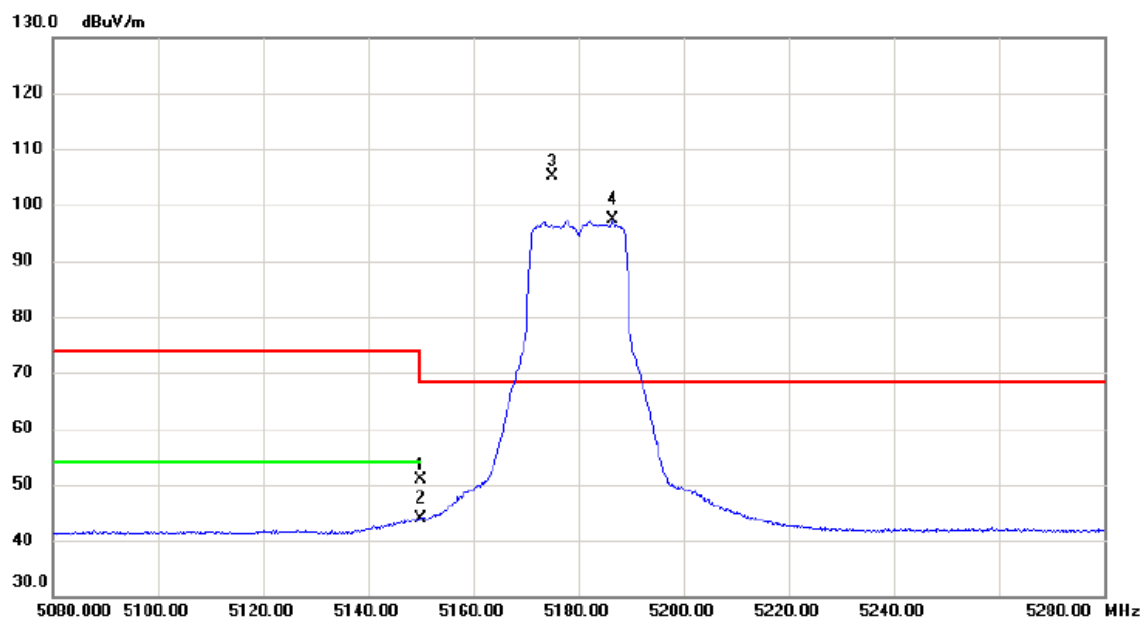

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	52.63	-1.71	50.92	74.00	-23.08	peak	
2		5150.000	45.59	-1.71	43.88	54.00	-10.12	AVG	
3	*	5175.200	106.91	-1.69	105.22	68.30	36.92	peak	主波訊號不予判定
4	X	5186.600	98.96	-1.70	97.26	68.30	28.96	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

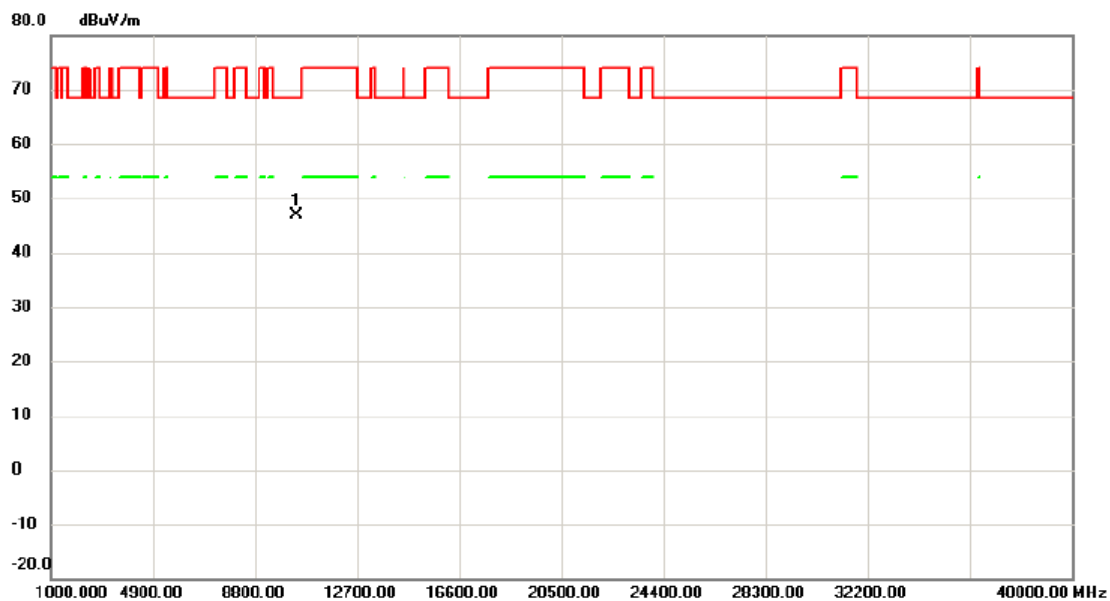

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10361.18	45.37	1.58	46.95	68.30	-21.35	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

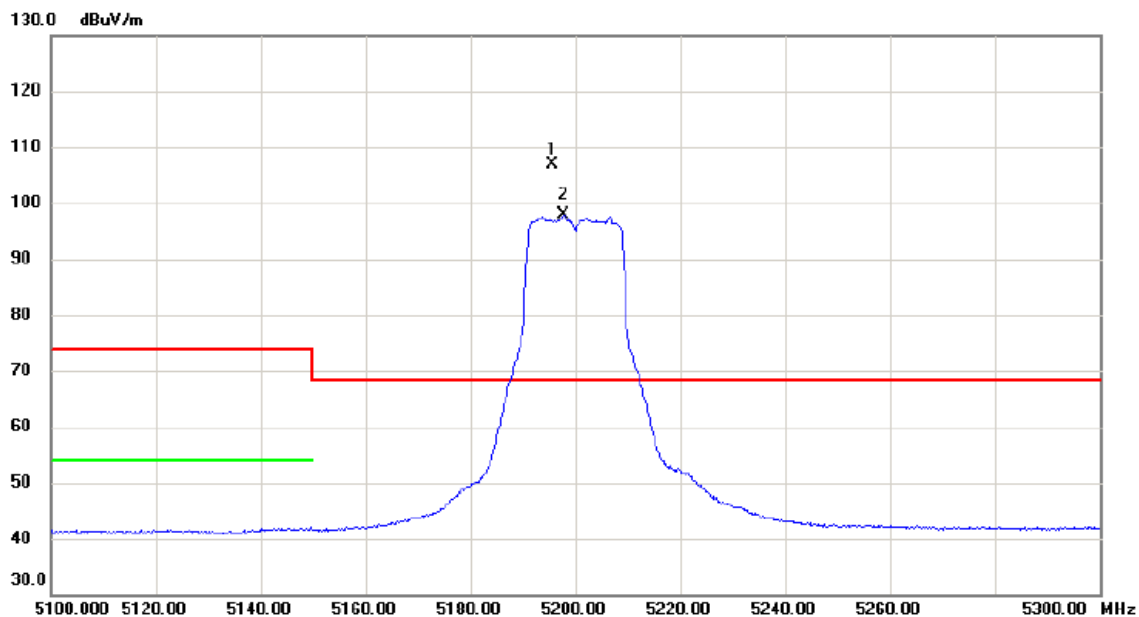

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5195.600	108.54	-1.68	106.86	68.30	38.56	peak	主波訊號不予判定
2	X	5197.800	99.63	-1.68	97.95	68.30	29.65	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

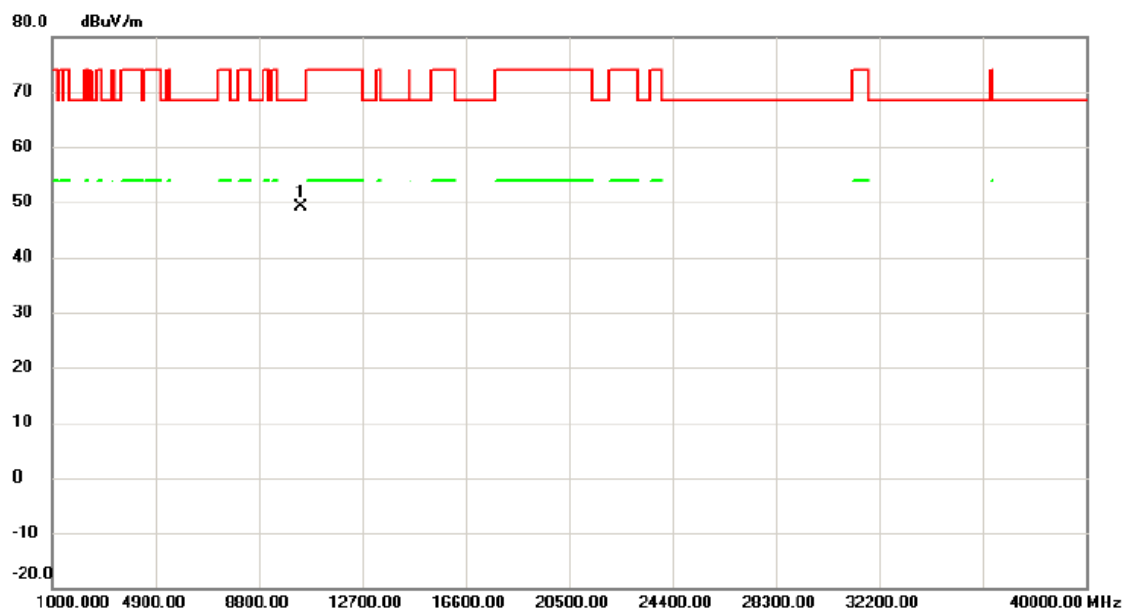

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10406.20	47.46	1.62	49.08	68.30	-19.22	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

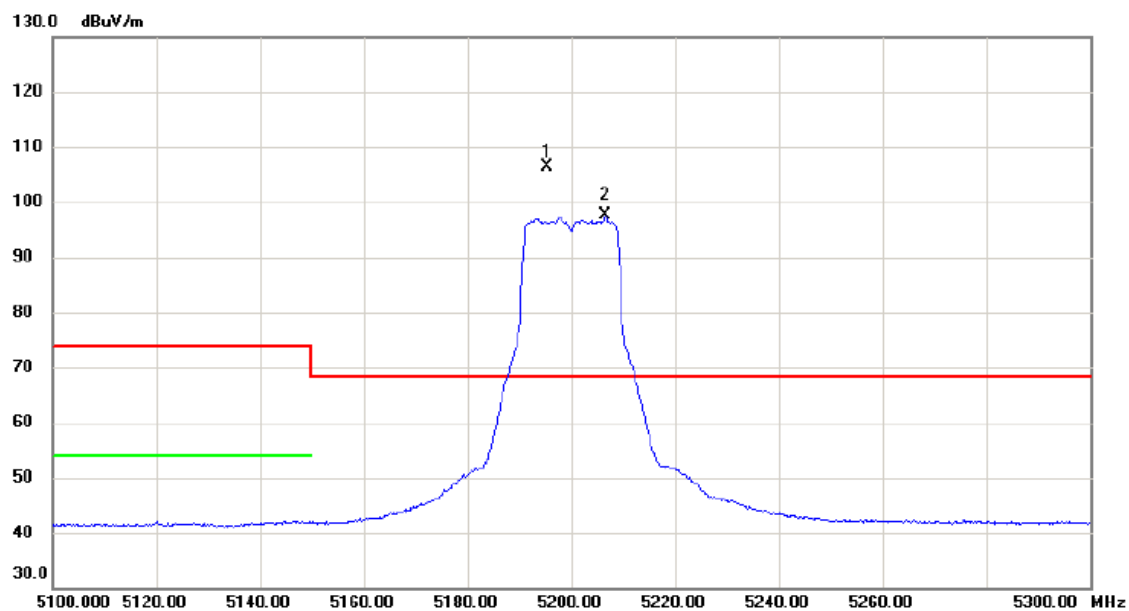

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5195.400	108.10	-1.68	106.42	68.30	38.12	peak	主波訊號不予判定
2	X	5206.600	99.27	-1.68	97.59	68.30	29.29	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

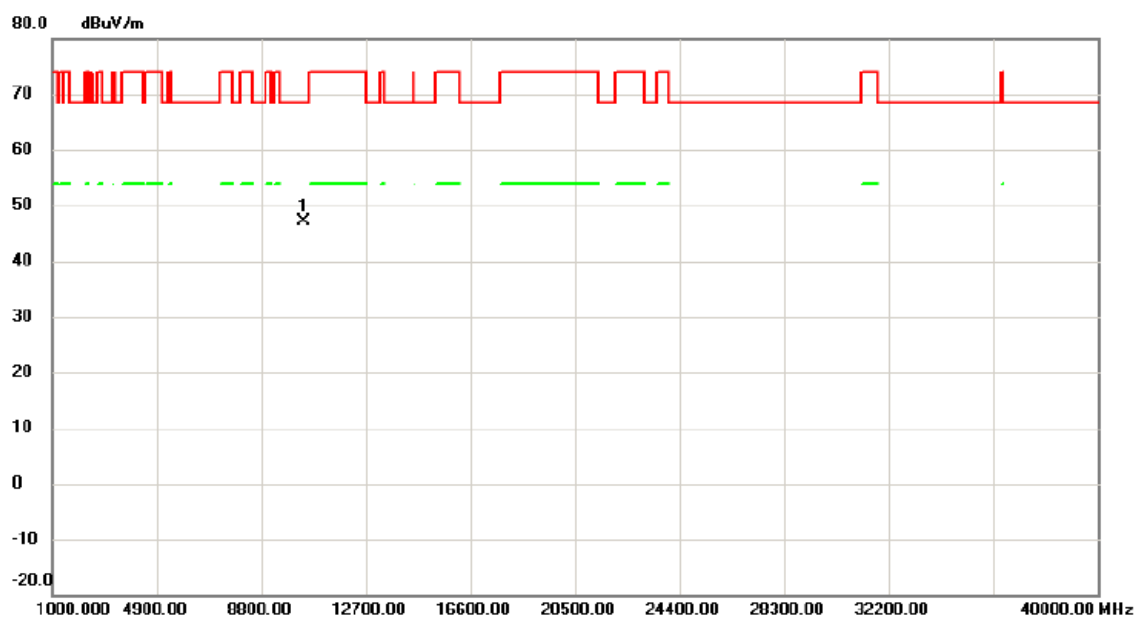

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10392.80	45.64	1.61	47.25	68.30	-21.05	peak	

測試頻道: IEEE 802.11ac (20 MHz) / 5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

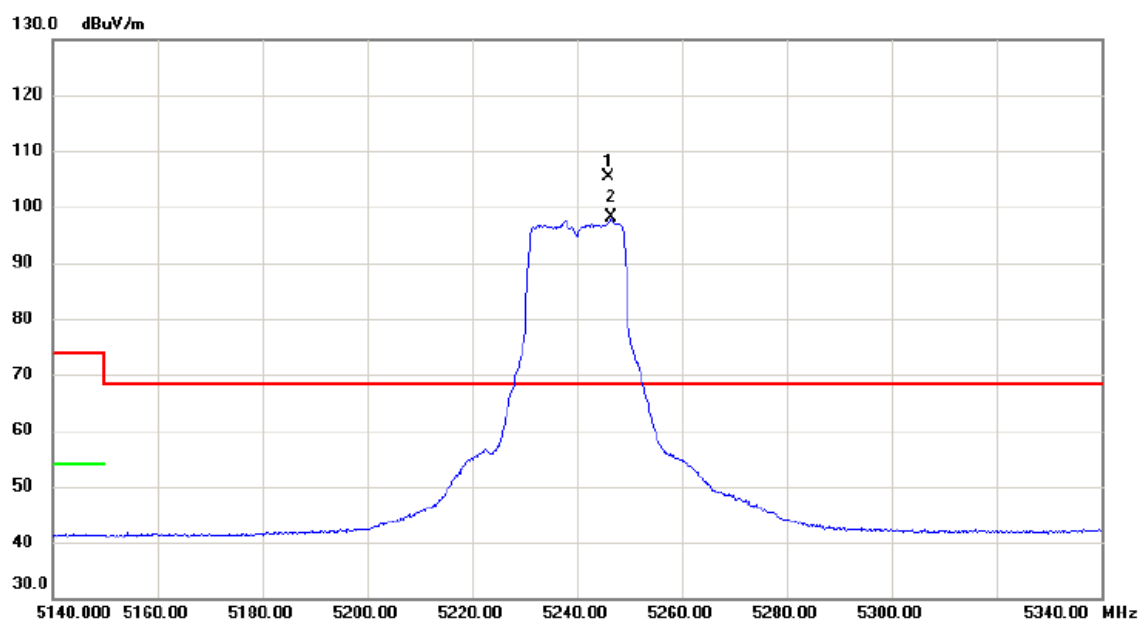

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5246.000	106.93	-1.65	105.28	68.30	36.98	peak	主波訊號不予判定
2	X	5246.600	99.69	-1.65	98.04	68.30	29.74	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

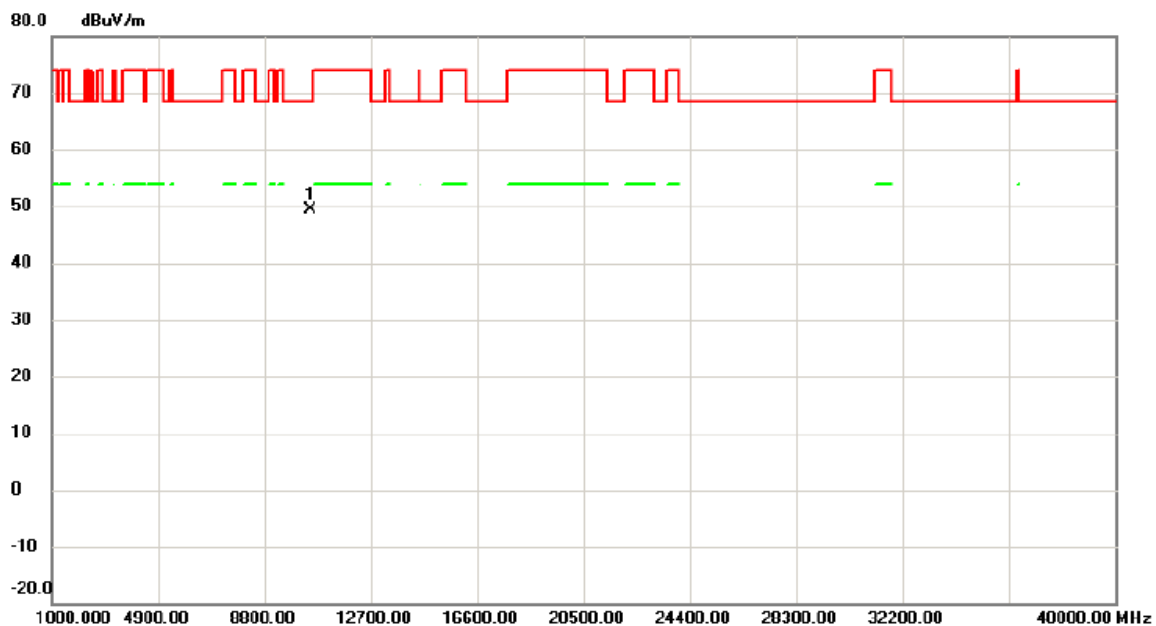

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10477.04	47.66	1.70	49.36	68.30	-18.94	peak	

測試頻道: IEEE 802.11ac (20 MHz) / 5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

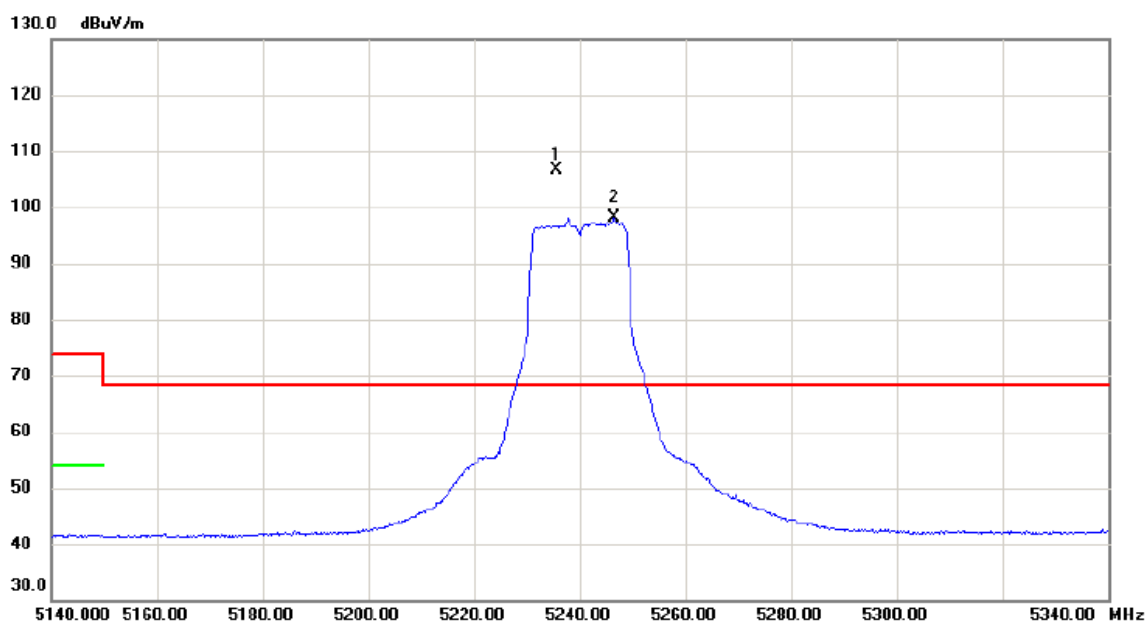

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5235.600	108.16	-1.65	106.51	68.30	38.21	peak	主波訊號不予判定
2	X	5246.600	99.85	-1.65	98.20	68.30	29.90	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

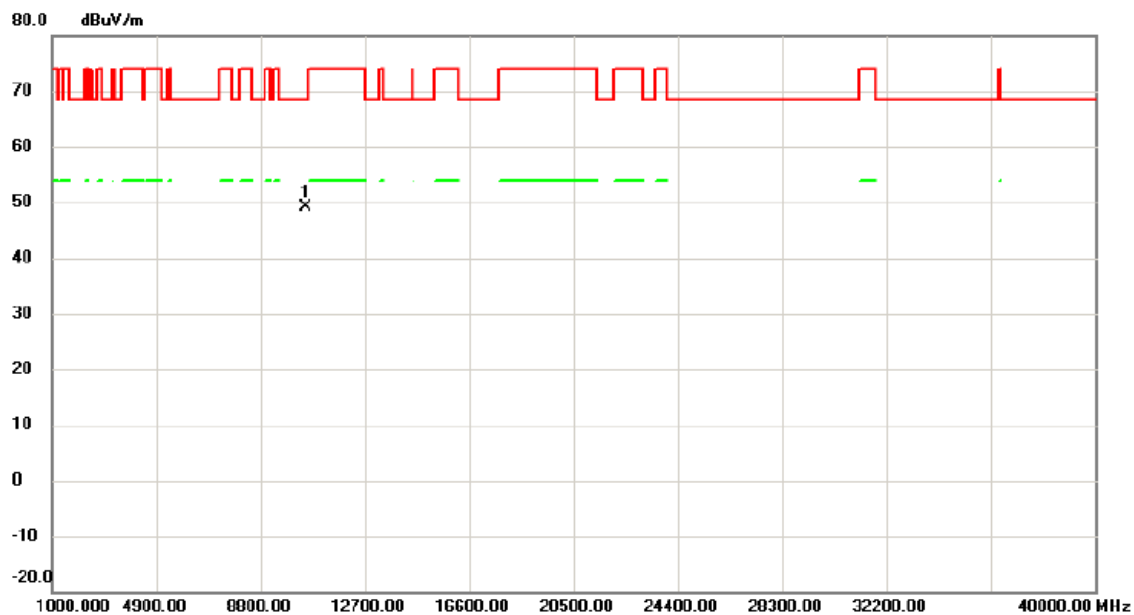

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10470.68	47.48	1.69	49.17	68.30	-19.13	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

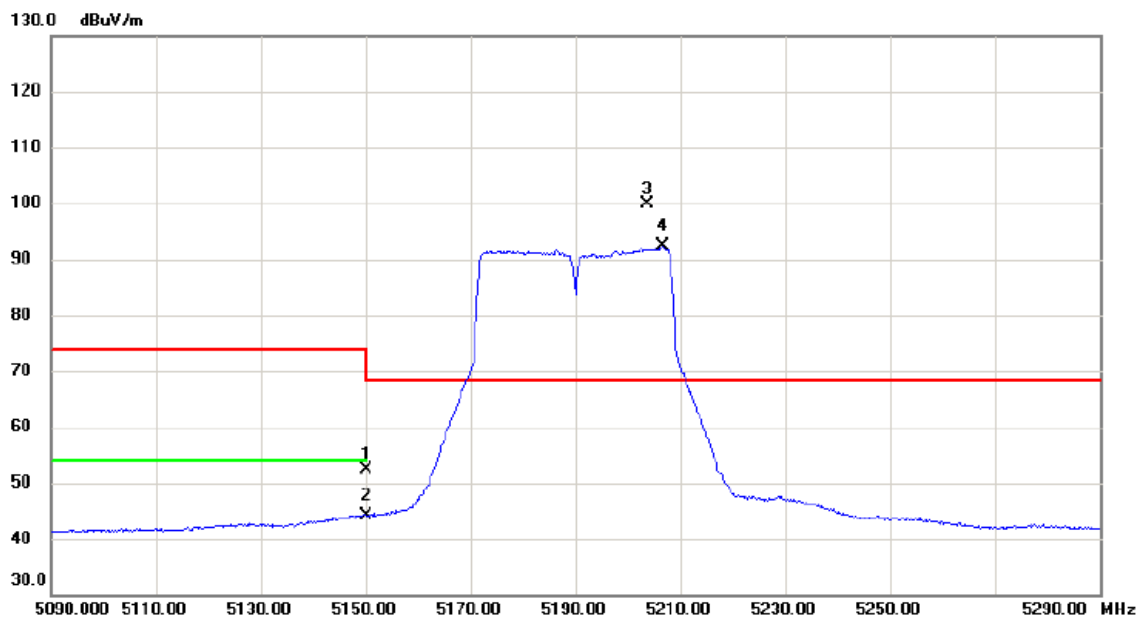

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	54.21	-1.71	52.50	74.00	-21.50	peak	
2		5150.000	45.76	-1.71	44.05	54.00	-9.95	AVG	
3	*	5203.800	101.57	-1.68	99.89	68.30	31.59	peak	主波訊號不予判定
4	X	5206.600	93.94	-1.68	92.26	68.30	23.96	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

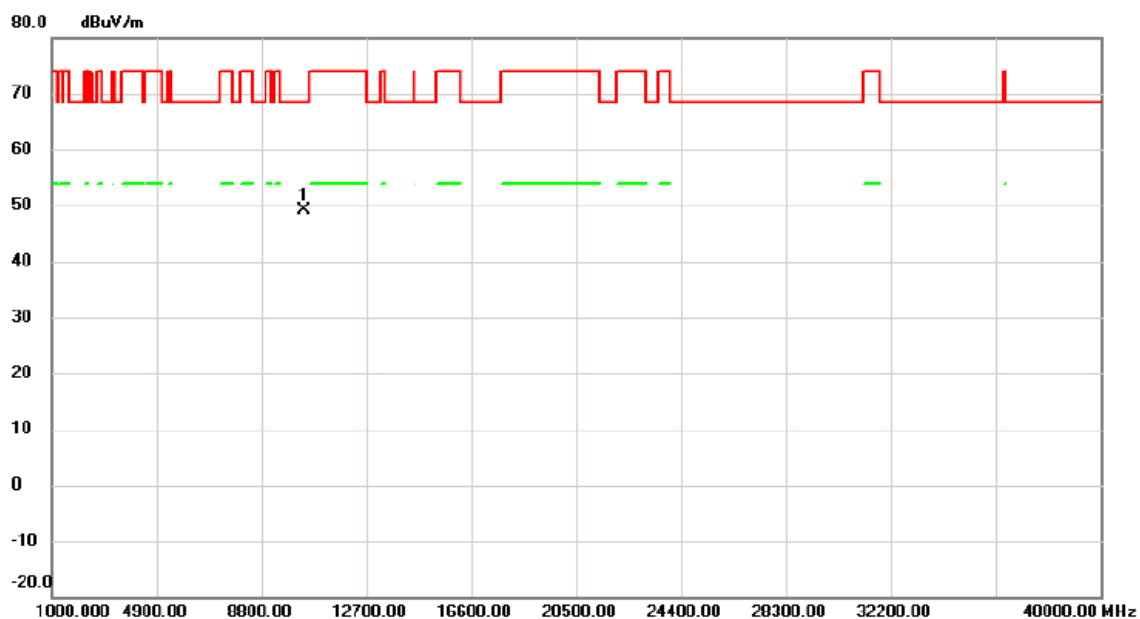

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10376.22	47.52	1.59	49.11	68.30	-19.19	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

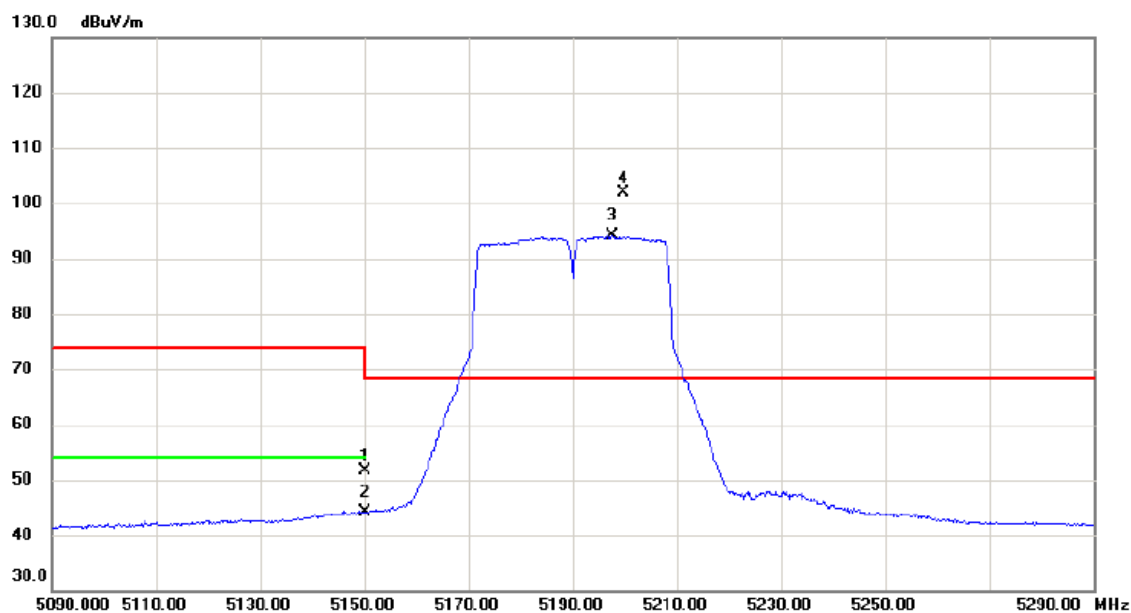

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	53.31	-1.71	51.60	74.00	-22.40	peak	
2		5150.000	45.72	-1.71	44.01	54.00	-9.99	AVG	
3	X	5197.600	95.74	-1.68	94.06	68.30	25.76	AVG	主波訊號不予判定
4	*	5199.600	103.49	-1.68	101.81	68.30	33.51	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

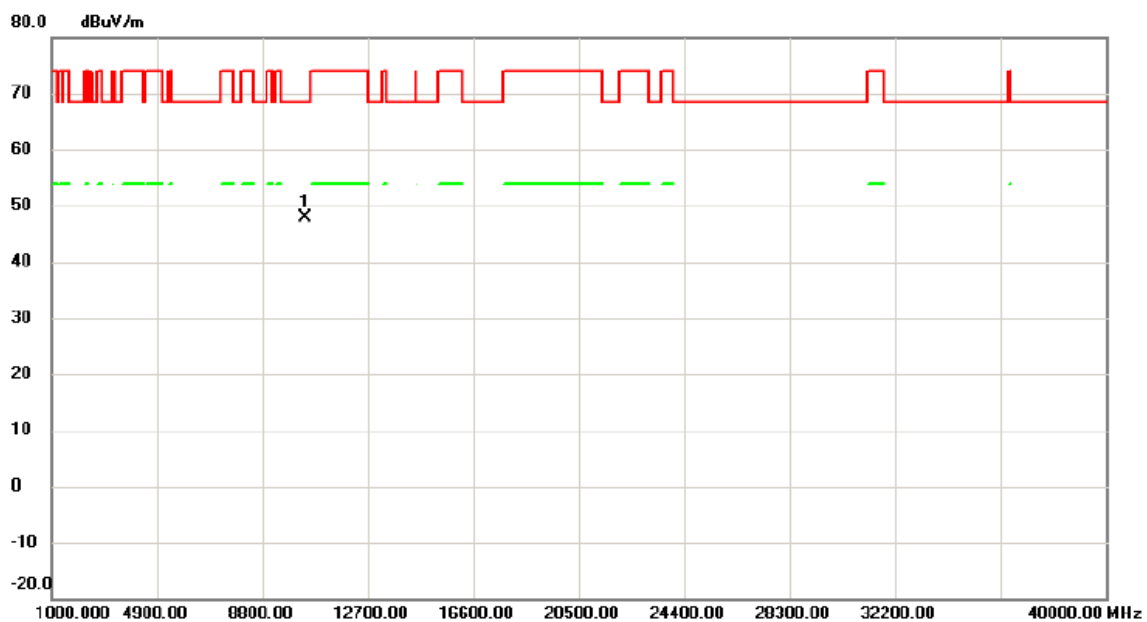

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10386.68	46.31	1.60	47.91	68.30	-20.39	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

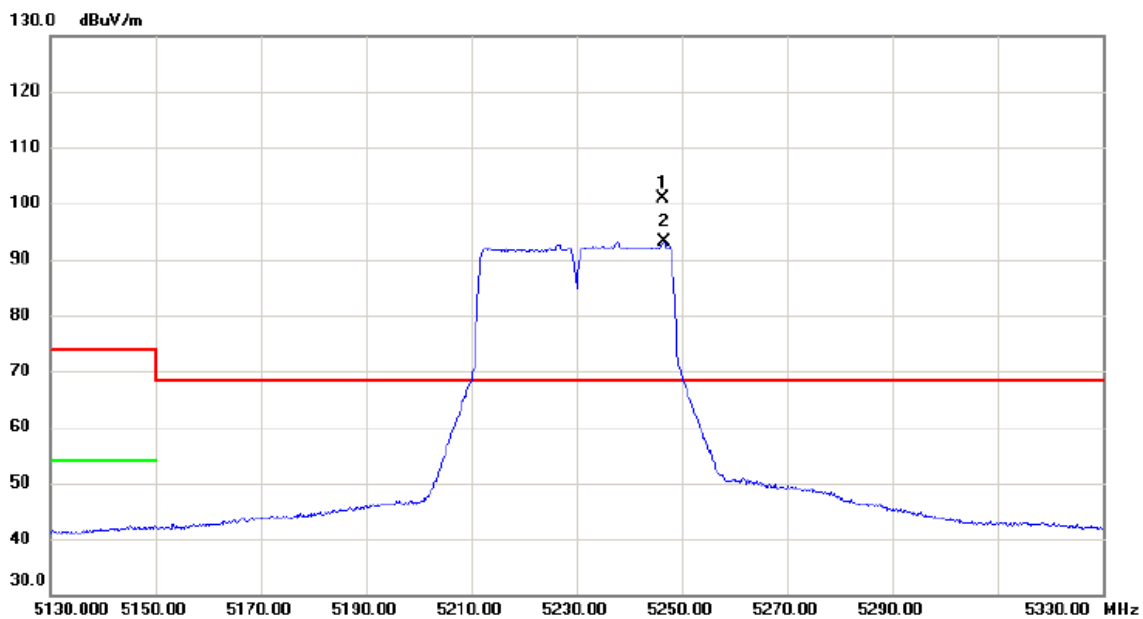

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5246.400	102.59	-1.65	100.94	68.30	32.64	peak	主波訊號不予判定
2	X	5246.600	94.75	-1.65	93.10	68.30	24.80	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

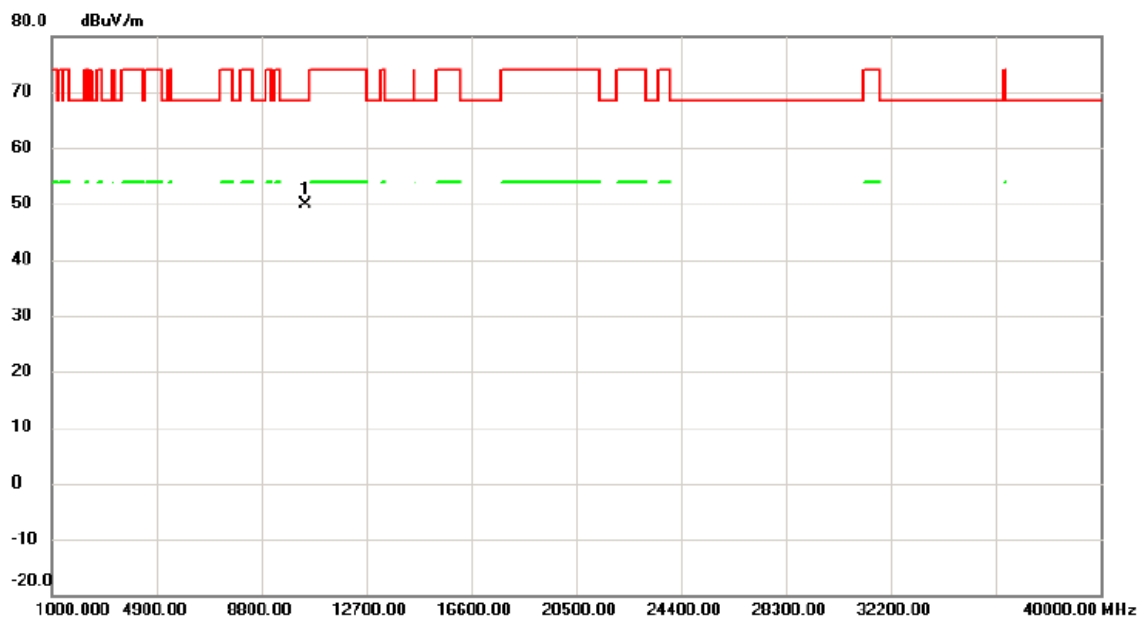

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10459.82	48.13	1.68	49.81	68.30	-18.49	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

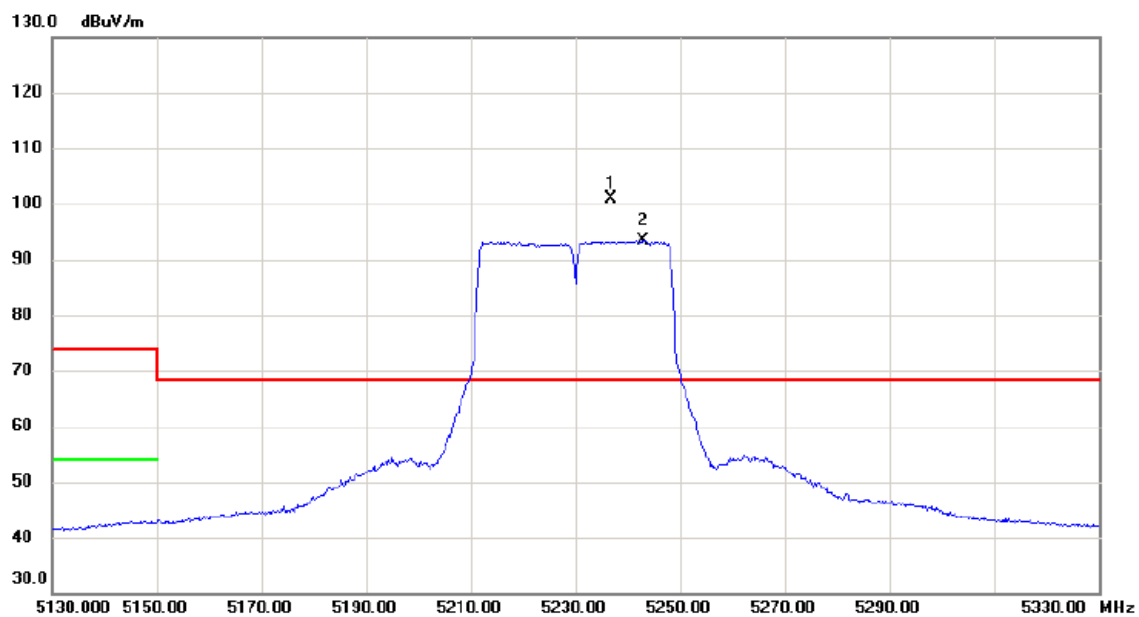

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5236.800	102.47	-1.66	100.81	68.30	32.51	peak	主波訊號不予判定
2	X	5243.000	95.05	-1.65	93.40	68.30	25.10	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

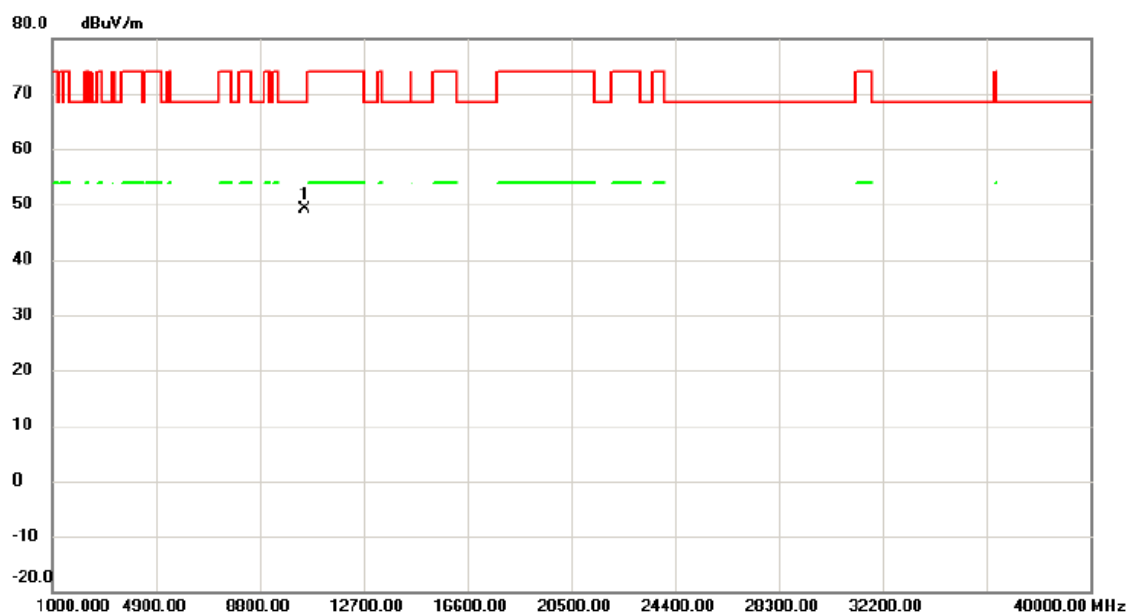

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10467.50	47.35	1.68	49.03	68.30	-19.27	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
5210 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

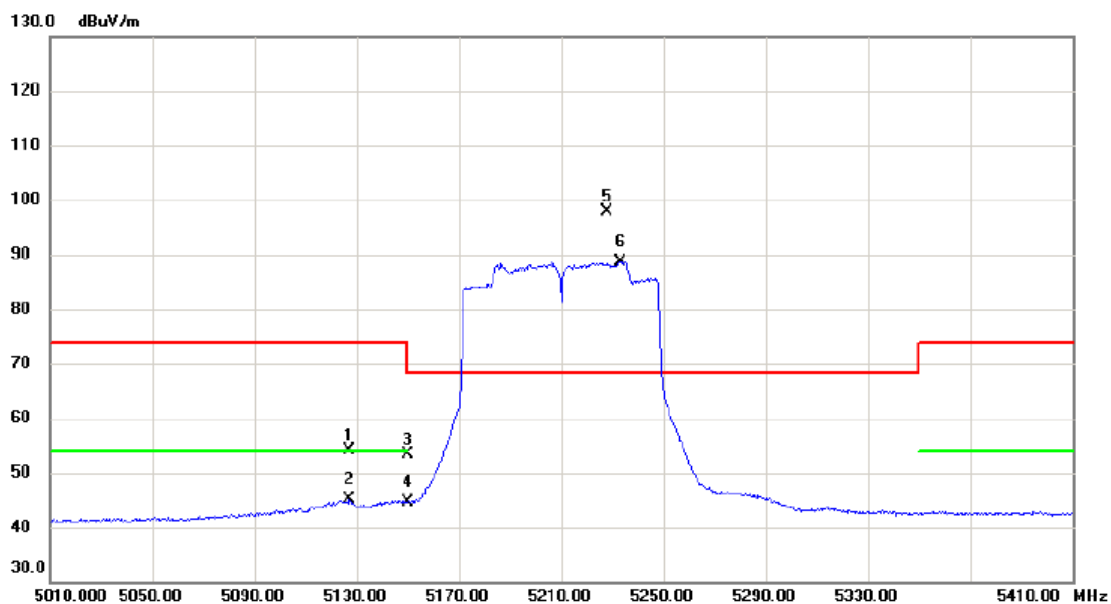

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5127.200	55.87	-1.74	54.13	74.00	-19.87	peak	
2		5127.200	46.84	-1.74	45.10	54.00	-8.90	AVG	
3		5150.000	55.15	-1.71	53.44	74.00	-20.56	peak	
4		5150.000	46.24	-1.71	44.53	54.00	-9.47	AVG	
5	*	5228.000	99.50	-1.66	97.84	68.30	29.54	peak	主波訊號不予判定
6	X	5233.200	90.35	-1.65	88.70	68.30	20.40	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (80 MHz) /
5210 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

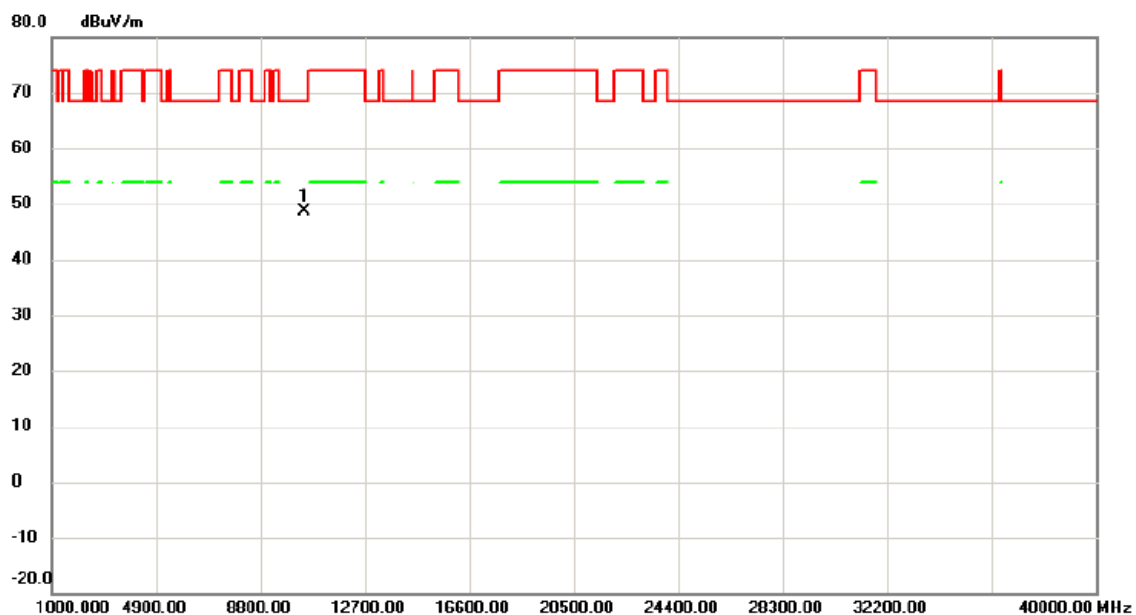

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10412.38	47.02	1.63	48.65	68.30	-19.65	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

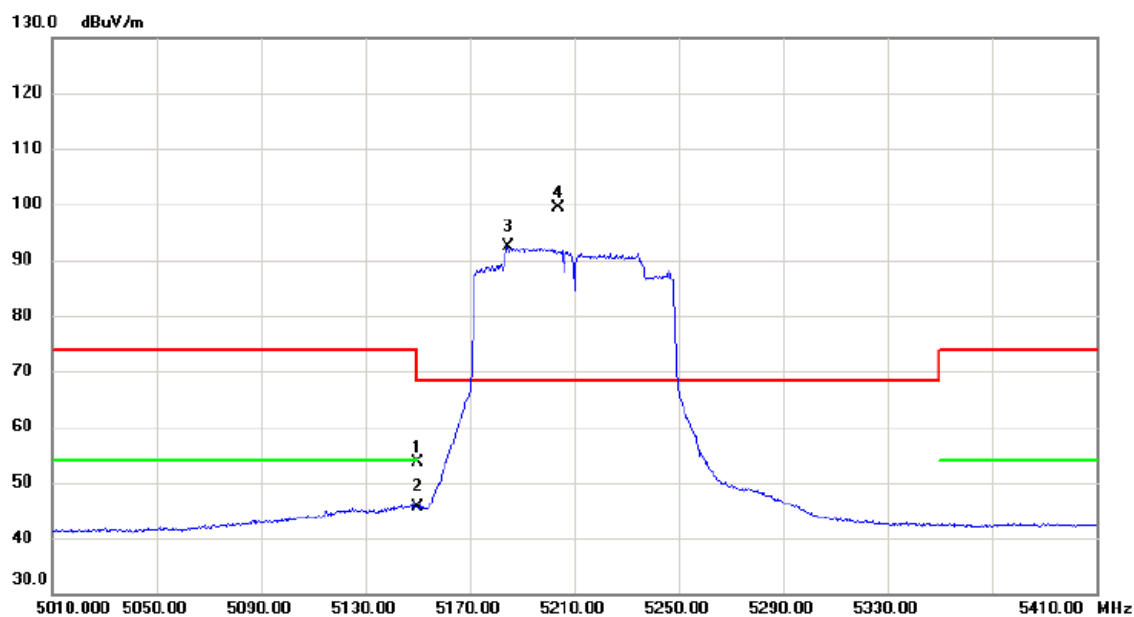

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	55.22	-1.71	53.51	74.00	-20.49	peak	
2		5150.000	47.39	-1.71	45.68	54.00	-8.32	AVG	
3	X	5184.800	94.09	-1.70	92.39	68.30	24.09	AVG	主波訊號不予判定
4	*	5204.000	101.10	-1.68	99.42	68.30	31.12	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (80 MHz) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

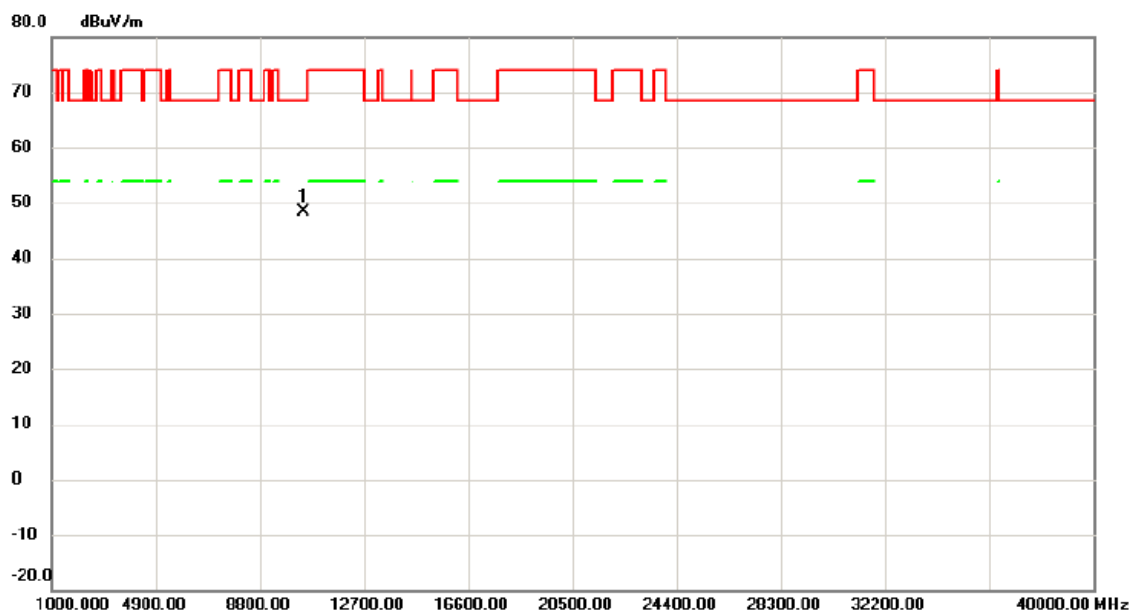

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10427.50	46.75	1.65	48.40	68.30	-19.90	peak	

測試頻道: IEEE 802.11ac (160 MHz) /
5250 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/11/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

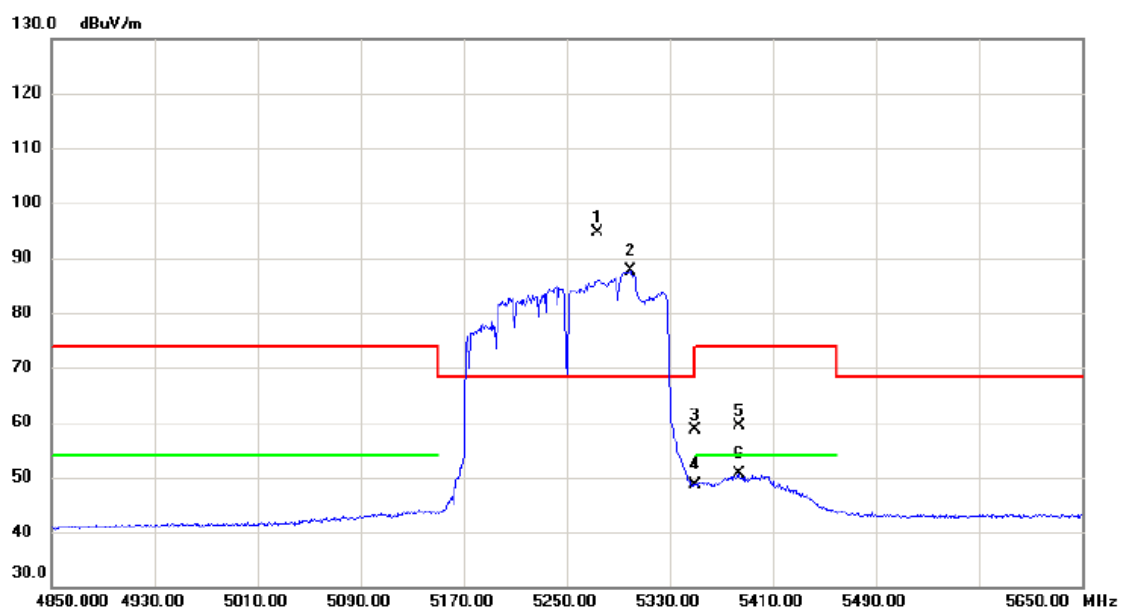

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5274.000	96.35	-1.63	94.72	68.30	26.42	peak	主波訊號不予判定
2	X	5299.600	89.24	-1.61	87.63	68.30	19.33	AVG	主波訊號不予判定
3		5350.000	60.10	-1.57	58.53	74.00	-15.47	peak	
4		5350.000	50.25	-1.57	48.68	54.00	-5.32	AVG	
5		5383.600	60.83	-1.55	59.28	74.00	-14.72	peak	
6		5383.600	52.28	-1.55	50.73	54.00	-3.27	AVG	

測試頻道: IEEE 802.11ac (160 MHz) /
5250 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

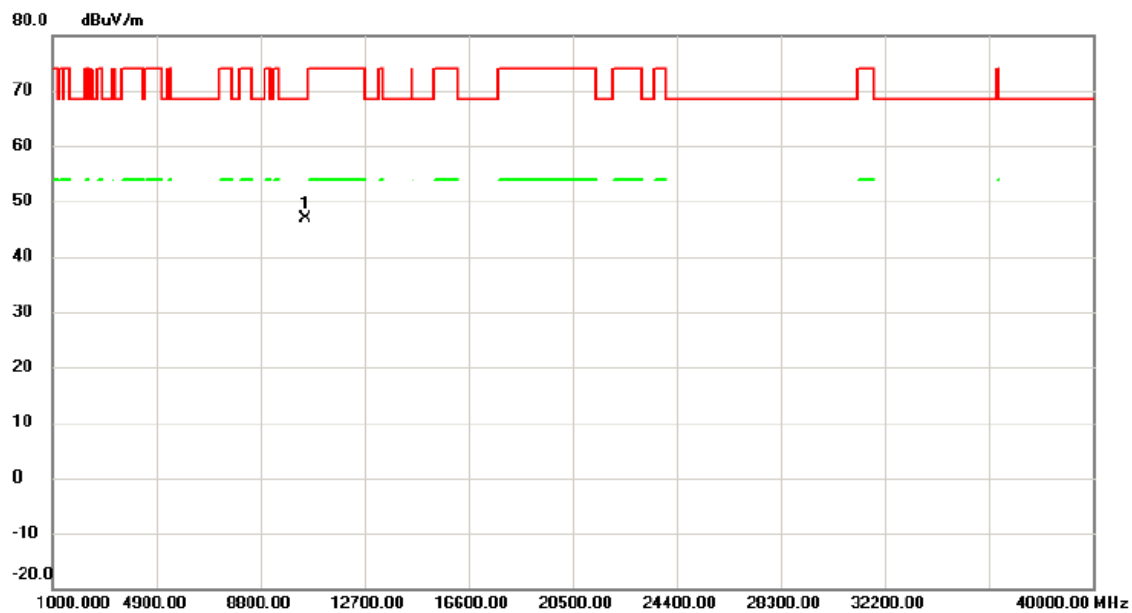

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.65	45.22	1.72	46.94	68.30	-21.36	peak	