


操作模式：	發射	調變技術：	DSSS
基本波頻率：	CH 13：2472 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=100Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	96.7 PK			1.43 V	114	98.6	-1.9
2	*2472.00	94.1 AV			1.43 V	114	96.0	-1.9
3	2485.30	57.1 PK	74.0	-16.9	1.43 V	114	59.0	-1.9
4	2485.30	50.4 AV	54.0	-3.6	1.43 V	114	52.3	-1.9
5	4944.00	43.4 PK	74.0	-30.6	1.34 V	40	40.6	2.8
6	4944.00	41.1 AV	54.0	-12.9	1.34 V	40	38.3	2.8
7	7416.00	40.8 PK	74.0	-33.2	1.17 V	184	31.8	9.0
8	7416.00	34.3 AV	54.0	-19.7	1.17 V	184	25.3	9.0
9	#9888.00	-	-	-	-	-	-	-
10	12360.00	-	-	-	-	-	-	-
11	#14832.00	-	-	-	-	-	-	-
12	#17304.00	-	-	-	-	-	-	-
13	19776.00	-	-	-	-	-	-	-
14	22248.00	-	-	-	-	-	-	-
15	#24720.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

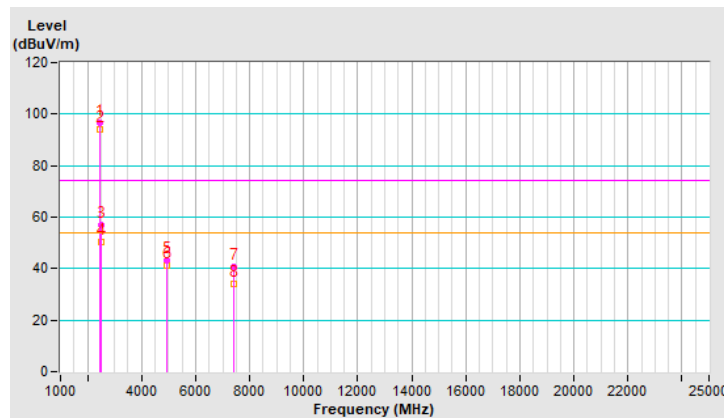


802.11g

操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 1 : 2412 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.9 PK	74.0	-11.1	3.28 H	203	64.8	-1.9
2	2390.00	46.3 AV	54.0	-7.7	3.28 H	203	48.2	-1.9
3	*2412.00	102.0 PK			3.28 H	203	103.9	-1.9
4	*2412.00	94.4 AV			3.28 H	203	96.3	-1.9
5	4824.00	47.9 PK	74.0	-26.1	1.47 H	121	45.0	2.9
6	4824.00	45.6 AV	54.0	-8.4	1.47 H	121	42.7	2.9
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

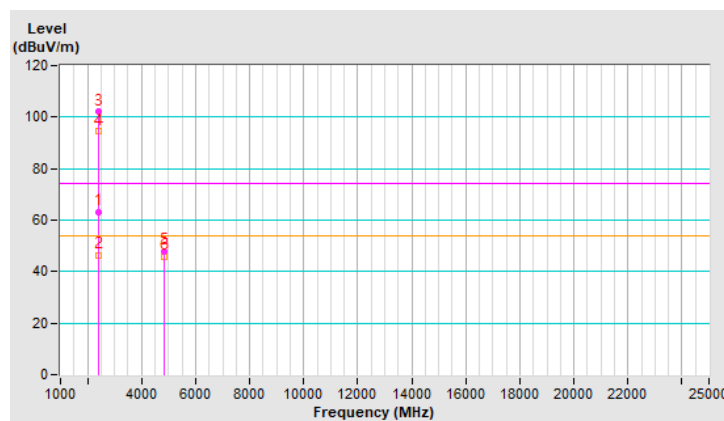


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 1：2412 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2384.04	73.8 PK	74.0	-0.2	1.50 V	159	75.7	-1.9
2	2384.04	52.2 AV	54.0	-1.8	1.50 V	159	54.1	-1.9
3	2388.29	73.5 PK	74.0	-0.5	1.50 V	159	75.4	-1.9
4	2388.29	53.8 AV	54.0	-0.2	1.50 V	159	55.7	-1.9
5	*2412.00	112.5 PK			1.50 V	159	114.4	-1.9
6	*2412.00	104.7 AV			1.50 V	159	106.6	-1.9
7	4824.00	46.1 PK	74.0	-27.9	1.28 V	24	43.2	2.9
8	4824.00	44.0 AV	54.0	-10.0	1.28 V	24	41.1	2.9
9	#7236.00	-	-	-	-	-	-	-
10	#9648.00	-	-	-	-	-	-	-
11	12060.00	-	-	-	-	-	-	-
12	14472.00	-	-	-	-	-	-	-
13	#16884.00	-	-	-	-	-	-	-
14	19296.00	-	-	-	-	-	-	-
15	#21708.00	-	-	-	-	-	-	-
16	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

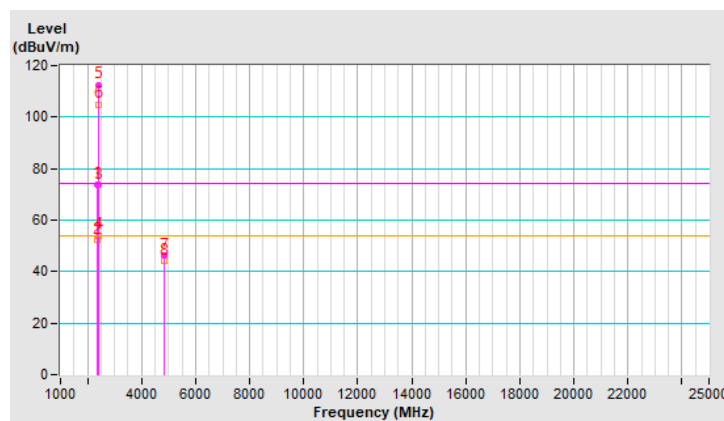


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 2：2417 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.7 PK	74.0	-11.3	3.30 H	204	64.6	-1.9
2	2390.00	46.2 AV	54.0	-7.8	3.30 H	204	48.1	-1.9
3	*2417.00	101.1 PK			3.30 H	204	103.0	-1.9
4	*2417.00	95.1 AV			3.30 H	204	97.0	-1.9
5	4834.00	48.6 PK	74.0	-25.4	1.45 H	125	45.7	2.9
6	4834.00	46.8 AV	54.0	-7.2	1.45 H	125	43.9	2.9
7	7251.00	44.9 PK	74.0	-29.1	1.29 H	165	36.1	8.8
8	7251.00	34.5 AV	54.0	-19.5	1.29 H	165	25.7	8.8
9	#9668.00	-	-	-	-	-	-	-
10	12085.00	-	-	-	-	-	-	-
11	#14502.00	-	-	-	-	-	-	-
12	#16919.00	-	-	-	-	-	-	-
13	19336.00	-	-	-	-	-	-	-
14	#21753.00	-	-	-	-	-	-	-
15	#24170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

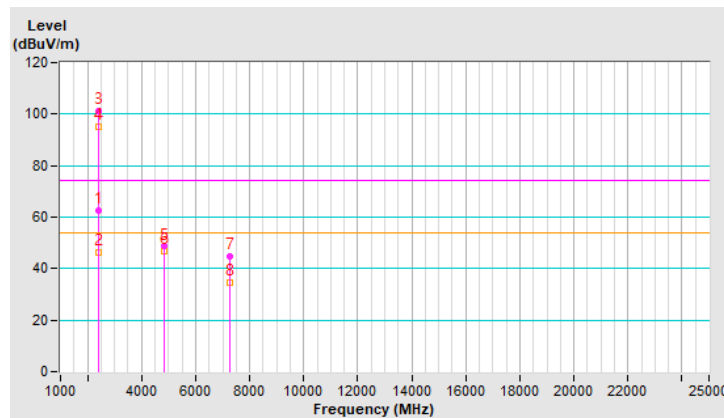


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 2：2417 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.26 V	298	73.5	-1.9
2	2390.00	53.7 AV	54.0	-0.3	1.26 V	298	55.6	-1.9
3	*2417.00	112.5 PK			1.26 V	298	114.4	-1.9
4	*2417.00	105.2 AV			1.26 V	298	107.1	-1.9
5	4834.00	46.2 PK	74.0	-27.8	1.31 V	35	43.3	2.9
6	4834.00	44.8 AV	54.0	-9.2	1.31 V	35	41.9	2.9
7	7251.00	44.2 PK	74.0	-29.8	1.21 V	180	35.4	8.8
8	7251.00	36.7 AV	54.0	-17.3	1.21 V	180	27.9	8.8
9	#9668.00	-	-	-	-	-	-	-
10	12085.00	-	-	-	-	-	-	-
11	#14502.00	-	-	-	-	-	-	-
12	#16919.00	-	-	-	-	-	-	-
13	19336.00	-	-	-	-	-	-	-
14	#21753.00	-	-	-	-	-	-	-
15	#24170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

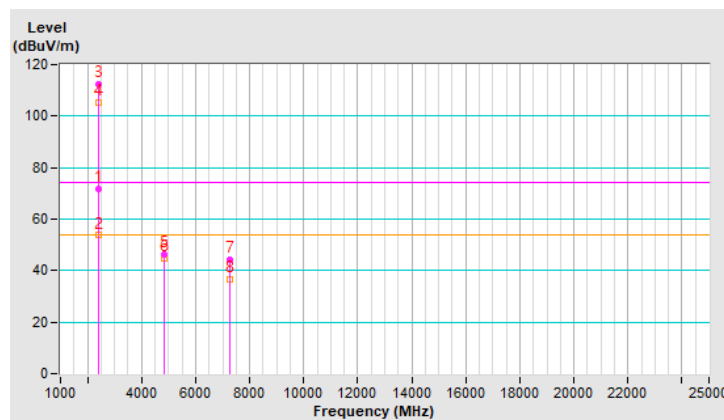


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 6：2437 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	3.34 H	219	62.2	-1.9
2	2390.00	45.3 AV	54.0	-8.7	3.34 H	219	47.2	-1.9
3	*2437.00	101.5 PK			3.34 H	219	103.5	-2.0
4	*2437.00	95.6 AV			3.34 H	219	97.6	-2.0
5	2483.50	54.7 PK	74.0	-19.3	3.34 H	219	56.6	-1.9
6	2483.50	42.1 AV	54.0	-11.9	3.34 H	219	44.0	-1.9
7	4874.00	48.5 PK	74.0	-25.5	1.48 H	126	45.7	2.8
8	4874.00	46.9 AV	54.0	-7.1	1.48 H	126	44.1	2.8
9	7311.00	45.2 PK	74.0	-28.8	1.28 H	161	36.3	8.9
10	7311.00	34.8 AV	54.0	-19.2	1.28 H	161	25.9	8.9
11	#9748.00	-	-	-	-	-	-	-
12	12185.00	-	-	-	-	-	-	-
13	#14622.00	-	-	-	-	-	-	-
14	#17059.00	-	-	-	-	-	-	-
15	19496.00	-	-	-	-	-	-	-
16	#21933.00	-	-	-	-	-	-	-
17	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

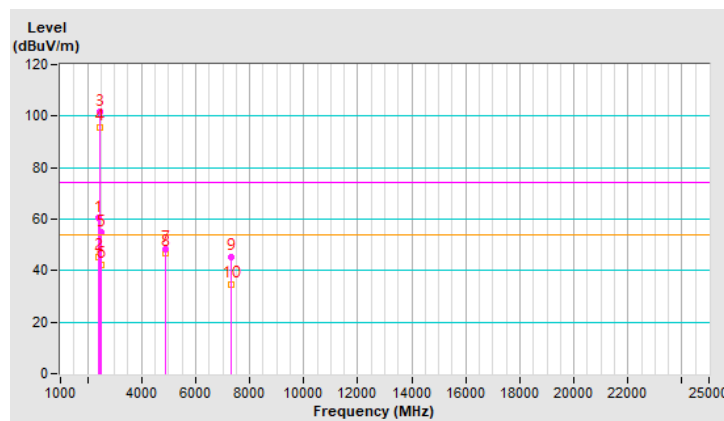


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 6：2437 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	1.32 V	294	64.0	-1.9
2	2390.00	52.8 AV	54.0	-1.2	1.32 V	294	54.7	-1.9
3	*2437.00	112.6 PK			1.32 V	294	114.6	-2.0
4	*2437.00	105.2 AV			1.32 V	294	107.2	-2.0
5	2483.50	58.1 PK	74.0	-15.9	1.32 V	294	60.0	-1.9
6	2483.50	47.9 AV	54.0	-6.1	1.32 V	294	49.8	-1.9
7	4874.00	46.5 PK	74.0	-27.5	1.31 V	23	43.7	2.8
8	4874.00	44.8 AV	54.0	-9.2	1.31 V	23	42.0	2.8
9	7311.00	43.6 PK	74.0	-30.4	1.25 V	175	34.7	8.9
10	7311.00	36.2 AV	54.0	-17.8	1.25 V	175	27.3	8.9
11	#9748.00	-	-	-	-	-	-	-
12	12185.00	-	-	-	-	-	-	-
13	#14622.00	-	-	-	-	-	-	-
14	#17059.00	-	-	-	-	-	-	-
15	19496.00	-	-	-	-	-	-	-
16	#21933.00	-	-	-	-	-	-	-
17	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

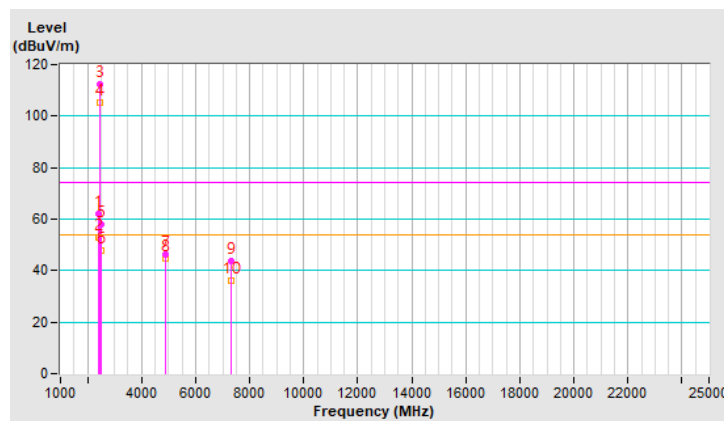


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 10：2457 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	101.7 PK			3.34 H	233	103.6	-1.9
2	*2457.00	95.7 AV			3.34 H	233	97.6	-1.9
3	2483.50	62.3 PK	74.0	-11.7	3.34 H	233	64.2	-1.9
4	2483.50	45.8 AV	54.0	-8.2	3.34 H	233	47.7	-1.9
5	4914.00	48.4 PK	74.0	-25.6	1.47 H	113	45.7	2.7
6	4914.00	46.8 AV	54.0	-7.2	1.47 H	113	44.1	2.7
7	7371.00	44.9 PK	74.0	-29.1	1.29 H	176	36.0	8.9
8	7371.00	34.4 AV	54.0	-19.6	1.29 H	176	25.5	8.9
9	#9828.00	-	-	-	-	-	-	-
10	12285.00	-	-	-	-	-	-	-
11	#14742.00	-	-	-	-	-	-	-
12	#17199.00	-	-	-	-	-	-	-
13	19656.00	-	-	-	-	-	-	-
14	22113.00	-	-	-	-	-	-	-
15	#24570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

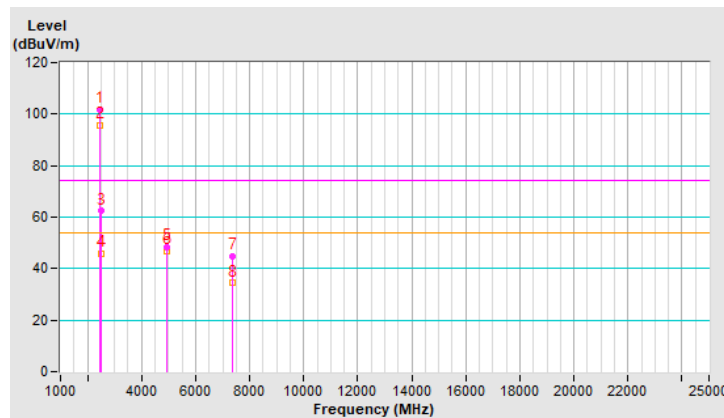


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 10：2457 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.4 PK			1.36 V	302	114.3	-1.9
2	*2457.00	105.0 AV			1.36 V	302	106.9	-1.9
3	2483.50	65.3 PK	74.0	-8.7	1.36 V	302	67.2	-1.9
4	2483.50	53.3 AV	54.0	-0.7	1.36 V	302	55.2	-1.9
5	4914.00	46.9 PK	74.0	-27.1	1.35 V	37	44.2	2.7
6	4914.00	45.0 AV	54.0	-9.0	1.35 V	37	42.3	2.7
7	7371.00	43.2 PK	74.0	-30.8	1.25 V	170	34.3	8.9
8	7371.00	36.0 AV	54.0	-18.0	1.25 V	170	27.1	8.9
9	#9828.00	-	-	-	-	-	-	-
10	12285.00	-	-	-	-	-	-	-
11	#14742.00	-	-	-	-	-	-	-
12	#17199.00	-	-	-	-	-	-	-
13	19656.00	-	-	-	-	-	-	-
14	22113.00	-	-	-	-	-	-	-
15	#24570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

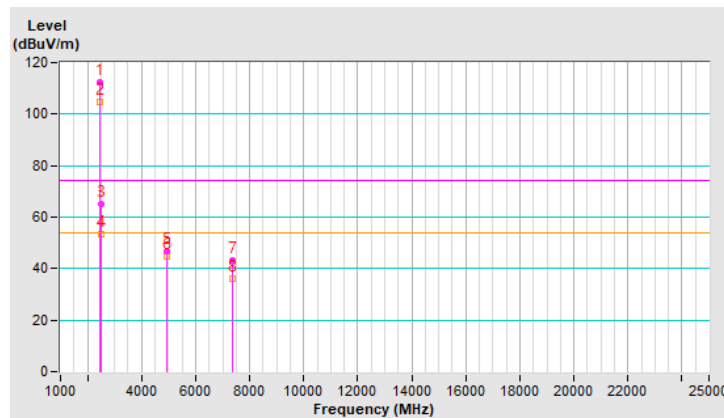


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 11：2462 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.2 PK			3.54 H	174	104.1	-1.9
2	*2462.00	95.2 AV			3.54 H	174	97.1	-1.9
3	2485.20	61.0 PK	74.0	-13.0	3.54 H	174	62.9	-1.9
4	2485.20	46.4 AV	54.0	-7.6	3.54 H	174	48.3	-1.9
5	4924.00	48.9 PK	74.0	-25.1	1.40 H	127	46.2	2.7
6	4924.00	46.9 AV	54.0	-7.1	1.40 H	127	44.2	2.7
7	7386.00	44.8 PK	74.0	-29.2	1.29 H	166	35.8	9.0
8	7386.00	34.3 AV	54.0	-19.7	1.29 H	166	25.3	9.0
9	#9848.00	-	-	-	-	-	-	-
10	12310.00	-	-	-	-	-	-	-
11	#14772.00	-	-	-	-	-	-	-
12	#17234.00	-	-	-	-	-	-	-
13	19696.00	-	-	-	-	-	-	-
14	22158.00	-	-	-	-	-	-	-
15	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

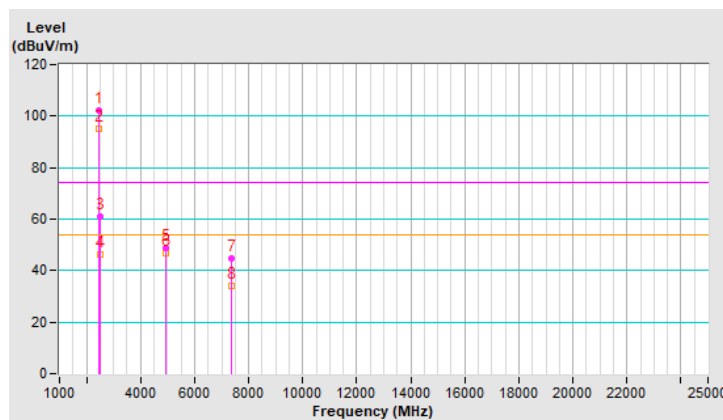


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 11：2462 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.7 PK			1.15 V	109	114.6	-1.9
2	*2462.00	105.1 AV			1.15 V	109	107.0	-1.9
3	2483.50	63.7 PK	74.0	-10.3	1.15 V	109	65.6	-1.9
4	2483.50	53.0 AV	54.0	-1.0	1.15 V	109	54.9	-1.9
5	4924.00	46.4 PK	74.0	-27.6	1.29 V	48	43.7	2.7
6	4924.00	44.8 AV	54.0	-9.2	1.29 V	48	42.1	2.7
7	7386.00	43.6 PK	74.0	-30.4	1.21 V	185	34.6	9.0
8	7386.00	36.4 AV	54.0	-17.6	1.21 V	185	27.4	9.0
9	#9848.00	-	-	-	-	-	-	-
10	12310.00	-	-	-	-	-	-	-
11	#14772.00	-	-	-	-	-	-	-
12	#17234.00	-	-	-	-	-	-	-
13	19696.00	-	-	-	-	-	-	-
14	22158.00	-	-	-	-	-	-	-
15	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

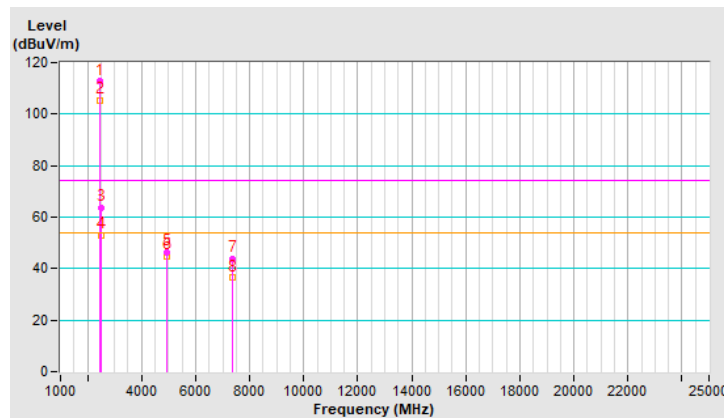


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 12：2467 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	99.8 PK			3.95 H	173	101.7	-1.9
2	*2467.00	91.6 AV			3.95 H	173	93.5	-1.9
3	2485.28	54.7 PK	74.0	-19.3	3.95 H	173	56.6	-1.9
4	2485.28	44.2 AV	54.0	-9.8	3.95 H	173	46.1	-1.9
5	4934.00	44.1 PK	74.0	-29.9	1.38 H	126	41.4	2.7
6	4934.00	42.7 AV	54.0	-11.3	1.38 H	126	40.0	2.7
7	7401.00	42.5 PK	74.0	-31.5	1.34 H	163	33.6	8.9
8	7401.00	32.3 AV	54.0	-21.7	1.34 H	163	23.4	8.9
9	#9868.00	-	-	-	-	-	-	-
10	12335.00	-	-	-	-	-	-	-
11	#14802.00	-	-	-	-	-	-	-
12	#17269.00	-	-	-	-	-	-	-
13	19736.00	-	-	-	-	-	-	-
14	22203.00	-	-	-	-	-	-	-
15	#24670.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

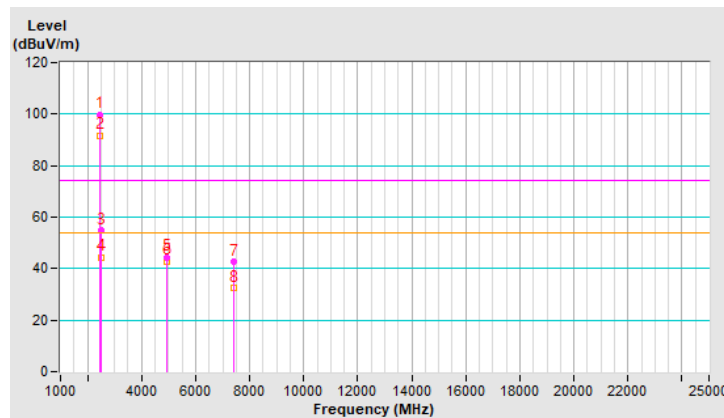


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 12：2467 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.4 PK			1.46 V	130	109.3	-1.9
2	*2467.00	100.8 AV			1.46 V	130	102.7	-1.9
3	2483.50	60.5 PK	74.0	-13.5	1.46 V	130	62.4	-1.9
4	2483.50	51.0 AV	54.0	-3.0	1.46 V	130	52.9	-1.9
5	4934.00	42.2 PK	74.0	-31.8	1.34 V	35	39.5	2.7
6	4934.00	40.8 AV	54.0	-13.2	1.34 V	35	38.1	2.7
7	7401.00	43.7 PK	74.0	-30.3	1.22 V	195	34.8	8.9
8	7401.00	34.6 AV	54.0	-19.4	1.22 V	195	25.7	8.9
9	#9868.00	-	-	-	-	-	-	-
10	12335.00	-	-	-	-	-	-	-
11	#14802.00	-	-	-	-	-	-	-
12	#17269.00	-	-	-	-	-	-	-
13	19736.00	-	-	-	-	-	-	-
14	22203.00	-	-	-	-	-	-	-
15	#24670.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

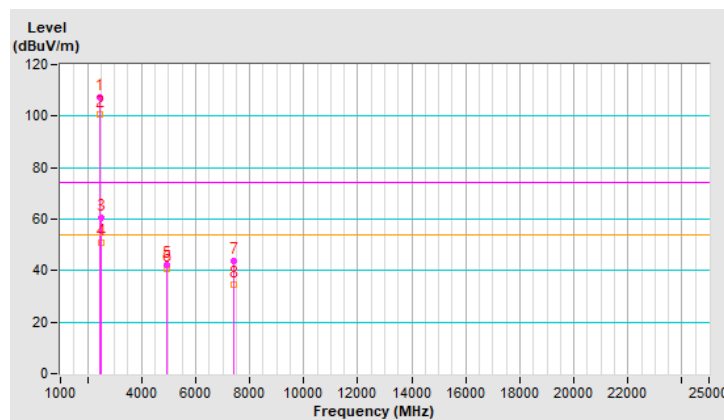


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 13：2472 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	95.4 PK			3.95 H	169	97.3	-1.9
2	*2472.00	86.9 AV			3.95 H	169	88.8	-1.9
3	2486.37	57.2 PK	74.0	-16.8	3.95 H	169	59.1	-1.9
4	2486.37	44.7 AV	54.0	-9.3	3.95 H	169	46.6	-1.9
5	4944.00	44.0 PK	74.0	-30.0	1.33 H	134	41.2	2.8
6	4944.00	41.5 AV	54.0	-12.5	1.33 H	134	38.7	2.8
7	7416.00	42.6 PK	74.0	-31.4	1.31 H	166	33.6	9.0
8	7416.00	32.5 AV	54.0	-21.5	1.31 H	166	23.5	9.0
9	#9888.00	-	-	-	-	-	-	-
10	12360.00	-	-	-	-	-	-	-
11	#14832.00	-	-	-	-	-	-	-
12	#17304.00	-	-	-	-	-	-	-
13	19776.00	-	-	-	-	-	-	-
14	22248.00	-	-	-	-	-	-	-
15	#24720.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

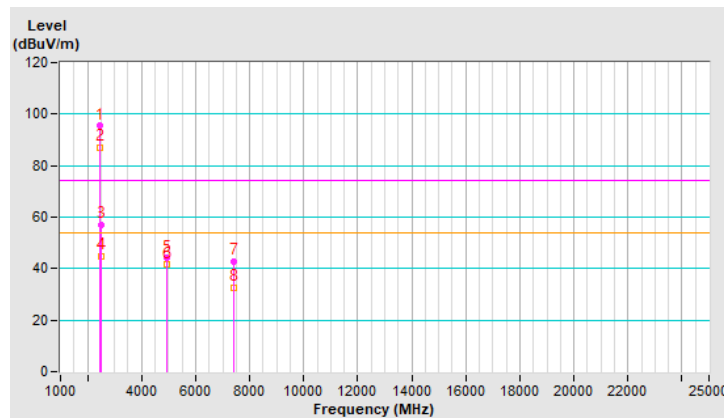


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 13：2472 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.4 PK			1.19 V	292	106.3	-1.9
2	*2472.00	96.8 AV			1.19 V	292	98.7	-1.9
3	2484.04	64.5 PK	74.0	-9.5	1.19 V	292	66.4	-1.9
4	2484.04	53.9 AV	54.0	-0.1	1.19 V	292	55.8	-1.9
5	4944.00	41.9 PK	74.0	-32.1	1.35 V	44	39.1	2.8
6	4944.00	40.2 AV	54.0	-13.8	1.35 V	44	37.4	2.8
7	7416.00	43.9 PK	74.0	-30.1	1.26 V	197	34.9	9.0
8	7416.00	34.8 AV	54.0	-19.2	1.26 V	197	25.8	9.0
9	#9888.00	-	-	-	-	-	-	-
10	12360.00	-	-	-	-	-	-	-
11	#14832.00	-	-	-	-	-	-	-
12	#17304.00	-	-	-	-	-	-	-
13	19776.00	-	-	-	-	-	-	-
14	22248.00	-	-	-	-	-	-	-
15	#24720.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

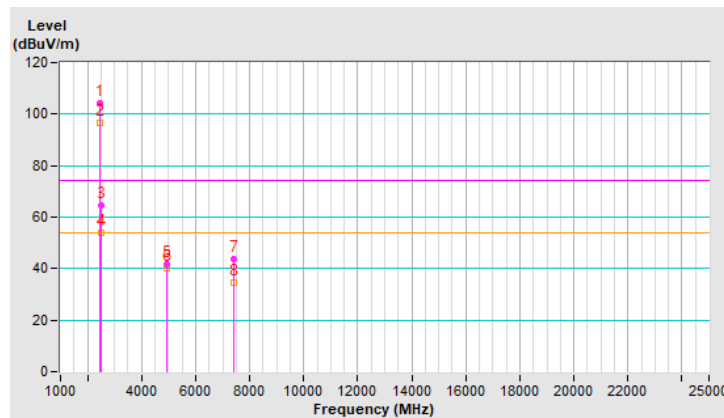


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 1：2412 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	64.7 PK	74.0	-9.3	3.29 H	204	66.6	-1.9
2	2389.00	46.5 AV	54.0	-7.5	3.29 H	204	48.4	-1.9
3	*2412.00	103.8 PK			3.29 H	204	105.7	-1.9
4	*2412.00	93.2 AV			3.29 H	204	95.1	-1.9
5	4824.00	47.7 PK	74.0	-26.3	1.45 H	124	44.8	2.9
6	4824.00	45.2 AV	54.0	-8.8	1.45 H	124	42.3	2.9
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

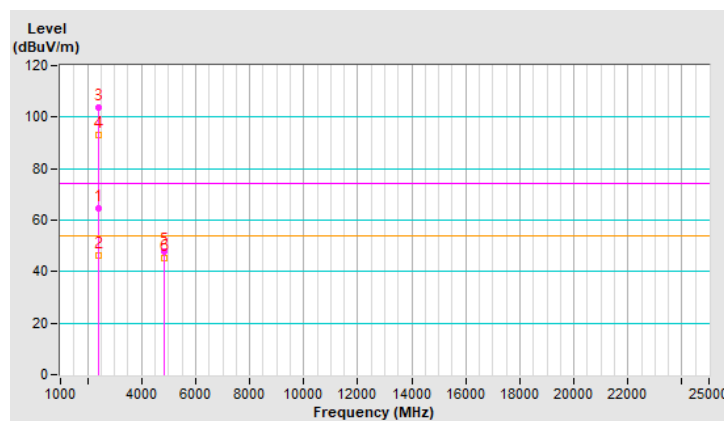


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 1：2412 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.25 V	106	74.1	-1.9
2	2390.00	53.7 AV	54.0	-0.3	1.25 V	106	55.6	-1.9
3	*2412.00	114.5 PK			1.25 V	106	116.4	-1.9
4	*2412.00	103.9 AV			1.25 V	106	105.8	-1.9
5	4824.00	46.6 PK	74.0	-27.4	1.25 V	19	43.7	2.9
6	4824.00	44.4 AV	54.0	-9.6	1.25 V	19	41.5	2.9
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

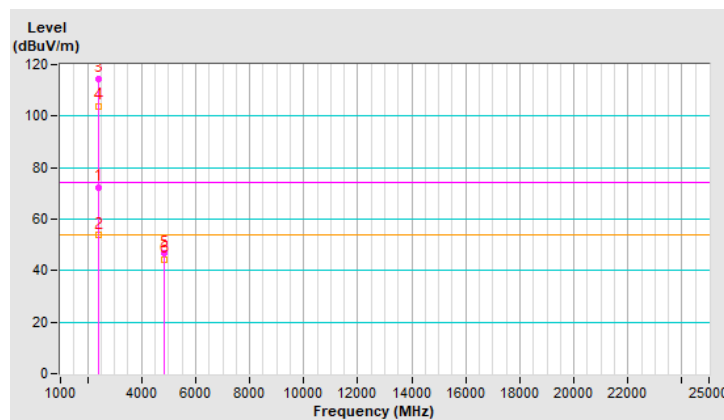


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 2：2417 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	3.24 H	188	66.3	-1.9
2	2390.00	46.3 AV	54.0	-7.7	3.24 H	188	48.2	-1.9
3	*2417.00	103.7 PK			3.24 H	188	105.6	-1.9
4	*2417.00	93.9 AV			3.24 H	188	95.8	-1.9
5	4834.00	48.1 PK	74.0	-25.9	1.52 H	125	45.2	2.9
6	4834.00	46.5 AV	54.0	-7.5	1.52 H	125	43.6	2.9
7	7251.00	45.1 PK	74.0	-28.9	1.30 H	155	36.3	8.8
8	7251.00	34.4 AV	54.0	-19.6	1.30 H	155	25.6	8.8
9	#9668.00	-	-	-	-	-	-	-
10	12085.00	-	-	-	-	-	-	-
11	#14502.00	-	-	-	-	-	-	-
12	#16919.00	-	-	-	-	-	-	-
13	19336.00	-	-	-	-	-	-	-
14	#21753.00	-	-	-	-	-	-	-
15	#24170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

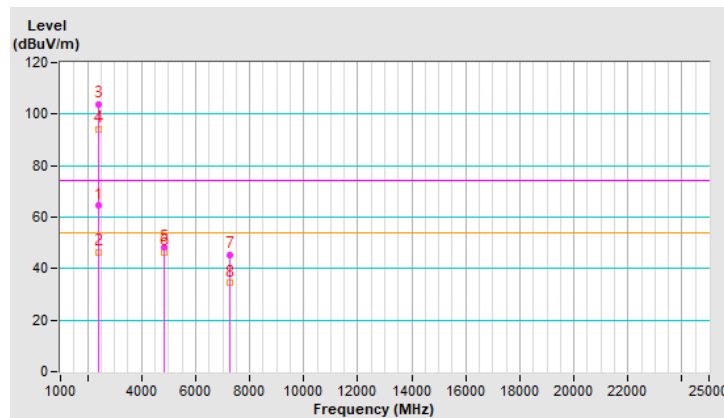


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 2：2417 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.27 V	110	68.7	-1.9
2	2390.00	53.5 AV	54.0	-0.5	1.27 V	110	55.4	-1.9
3	*2417.00	116.3 PK			1.27 V	110	118.2	-1.9
4	*2417.00	104.3 AV			1.27 V	110	106.2	-1.9
5	4834.00	46.3 PK	74.0	-27.7	1.31 V	41	43.4	2.9
6	4834.00	45.2 AV	54.0	-8.8	1.31 V	41	42.3	2.9
7	7251.00	43.6 PK	74.0	-30.4	1.18 V	194	34.8	8.8
8	7251.00	36.3 AV	54.0	-17.7	1.18 V	194	27.5	8.8
9	#9668.00	-	-	-	-	-	-	-
10	12085.00	-	-	-	-	-	-	-
11	#14502.00	-	-	-	-	-	-	-
12	#16919.00	-	-	-	-	-	-	-
13	19336.00	-	-	-	-	-	-	-
14	#21753.00	-	-	-	-	-	-	-
15	#24170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

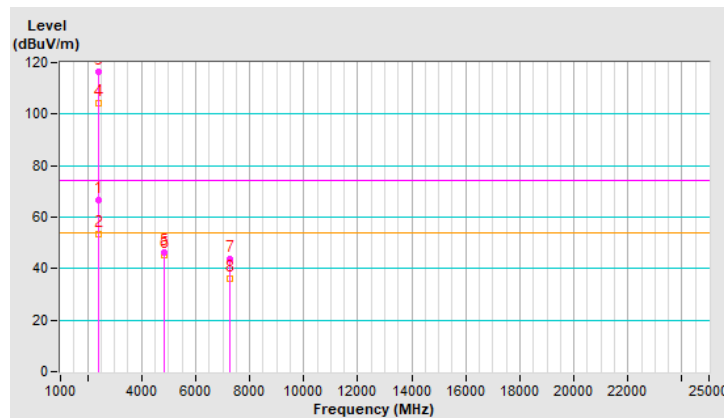


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 6：2437 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	3.87 H	168	66.1	-1.9
2	2390.00	46.0 AV	54.0	-8.0	3.87 H	168	47.9	-1.9
3	*2437.00	105.3 PK			3.87 H	168	107.3	-2.0
4	*2437.00	94.3 AV			3.87 H	168	96.3	-2.0
5	2483.50	57.3 PK	74.0	-16.7	3.87 H	168	59.2	-1.9
6	2483.50	44.6 AV	54.0	-9.4	3.87 H	168	46.5	-1.9
7	4874.00	48.5 PK	74.0	-25.5	1.45 H	139	45.7	2.8
8	4874.00	46.9 AV	54.0	-7.1	1.45 H	139	44.1	2.8
9	7311.00	45.6 PK	74.0	-28.4	1.31 H	155	36.7	8.9
10	7311.00	35.2 AV	54.0	-18.8	1.31 H	155	26.3	8.9
11	#9748.00	-	-	-	-	-	-	-
12	12185.00	-	-	-	-	-	-	-
13	#14622.00	-	-	-	-	-	-	-
14	#17059.00	-	-	-	-	-	-	-
15	19496.00	-	-	-	-	-	-	-
16	#21933.00	-	-	-	-	-	-	-
17	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

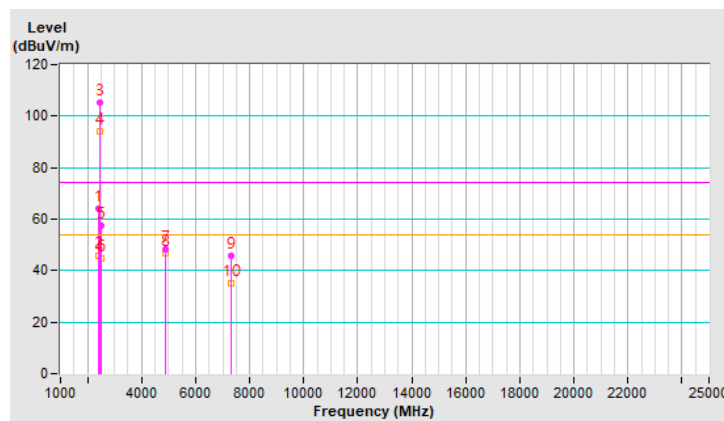


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 6：2437 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	1.29 V	113	64.3	-1.9
2	2390.00	53.0 AV	54.0	-1.0	1.29 V	113	54.9	-1.9
3	*2437.00	116.0 PK			1.29 V	113	118.0	-2.0
4	*2437.00	104.7 AV			1.29 V	113	106.7	-2.0
5	2483.50	60.4 PK	74.0	-13.6	1.29 V	113	62.3	-1.9
6	2483.50	49.2 AV	54.0	-4.8	1.29 V	113	51.1	-1.9
7	4874.00	45.7 PK	74.0	-28.3	1.33 V	32	42.9	2.8
8	4874.00	44.3 AV	54.0	-9.7	1.33 V	32	41.5	2.8
9	7311.00	44.4 PK	74.0	-29.6	1.20 V	177	35.5	8.9
10	7311.00	37.0 AV	54.0	-17.0	1.20 V	177	28.1	8.9
11	#9748.00	-	-	-	-	-	-	-
12	12185.00	-	-	-	-	-	-	-
13	#14622.00	-	-	-	-	-	-	-
14	#17059.00	-	-	-	-	-	-	-
15	19496.00	-	-	-	-	-	-	-
16	#21933.00	-	-	-	-	-	-	-
17	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

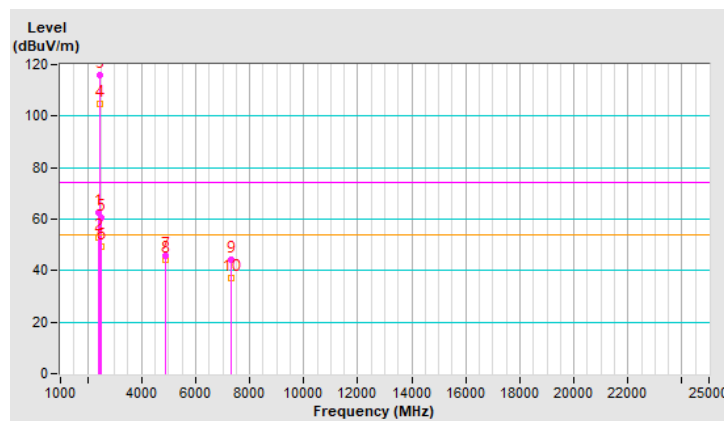


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 10：2457 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.7 PK			3.88 H	179	106.6	-1.9
2	*2457.00	94.2 AV			3.88 H	179	96.1	-1.9
3	2483.50	64.4 PK	74.0	-9.6	3.88 H	179	66.3	-1.9
4	2483.50	46.5 AV	54.0	-7.5	3.88 H	179	48.4	-1.9
5	4914.00	49.1 PK	74.0	-24.9	1.46 H	112	46.4	2.7
6	4914.00	47.3 AV	54.0	-6.7	1.46 H	112	44.6	2.7
7	7371.00	45.5 PK	74.0	-28.5	1.32 H	164	36.6	8.9
8	7371.00	35.2 AV	54.0	-18.8	1.32 H	164	26.3	8.9
9	#9828.00	-	-	-	-	-	-	-
10	12285.00	-	-	-	-	-	-	-
11	#14742.00	-	-	-	-	-	-	-
12	#17199.00	-	-	-	-	-	-	-
13	19656.00	-	-	-	-	-	-	-
14	22113.00	-	-	-	-	-	-	-
15	#24570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

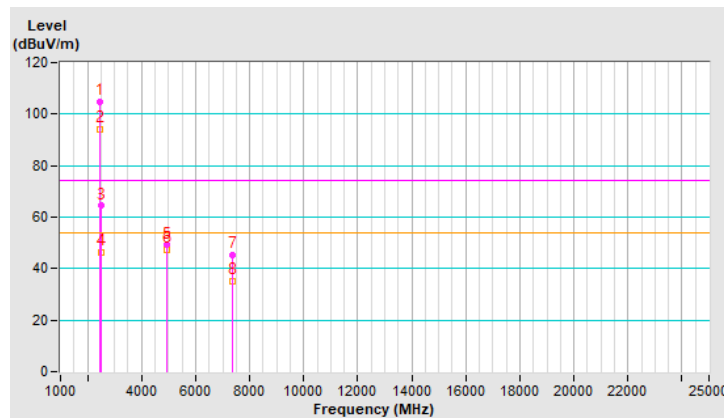


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 10：2457 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	116.5 PK			1.31 V	120	118.4	-1.9
2	*2457.00	104.6 AV			1.31 V	120	106.5	-1.9
3	2483.50	66.4 PK	74.0	-7.6	1.31 V	120	68.3	-1.9
4	2483.50	53.7 AV	54.0	-0.3	1.31 V	120	55.6	-1.9
5	4914.00	46.2 PK	74.0	-27.8	1.28 V	24	43.5	2.7
6	4914.00	45.0 AV	54.0	-9.0	1.28 V	24	42.3	2.7
7	7371.00	44.5 PK	74.0	-29.5	1.27 V	183	35.6	8.9
8	7371.00	37.2 AV	54.0	-16.8	1.27 V	183	28.3	8.9
9	#9828.00	-	-	-	-	-	-	-
10	12285.00	-	-	-	-	-	-	-
11	#14742.00	-	-	-	-	-	-	-
12	#17199.00	-	-	-	-	-	-	-
13	19656.00	-	-	-	-	-	-	-
14	22113.00	-	-	-	-	-	-	-
15	#24570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

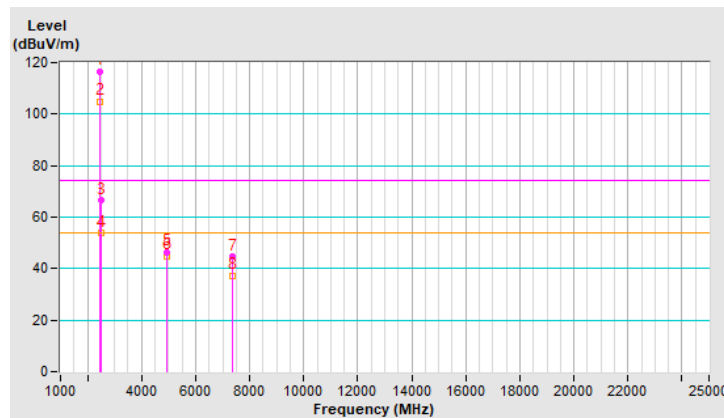


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 11：2462 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.1 PK			3.94 H	169	107.0	-1.9
2	*2462.00	94.3 AV			3.94 H	169	96.2	-1.9
3	2483.50	59.3 PK	74.0	-14.7	3.94 H	169	61.2	-1.9
4	2483.50	46.7 AV	54.0	-7.3	3.94 H	169	48.6	-1.9
5	4924.00	48.9 PK	74.0	-25.1	1.39 H	114	46.2	2.7
6	4924.00	46.7 AV	54.0	-7.3	1.39 H	114	44.0	2.7
7	7386.00	45.1 PK	74.0	-28.9	1.33 H	175	36.1	9.0
8	7386.00	34.5 AV	54.0	-19.5	1.33 H	175	25.5	9.0
9	#9848.00	-	-	-	-	-	-	-
10	12310.00	-	-	-	-	-	-	-
11	#14772.00	-	-	-	-	-	-	-
12	#17234.00	-	-	-	-	-	-	-
13	19696.00	-	-	-	-	-	-	-
14	22158.00	-	-	-	-	-	-	-
15	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

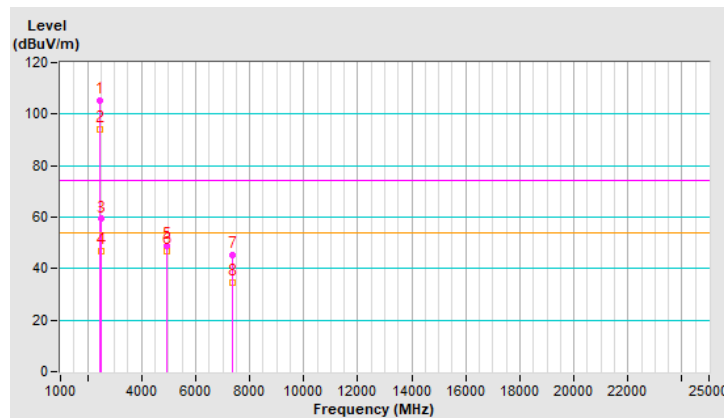


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 11：2462 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.0 PK			1.00 V	110	115.9	-1.9
2	*2462.00	103.2 AV			1.00 V	110	105.1	-1.9
3	2483.50	64.4 PK	74.0	-9.6	1.00 V	110	66.3	-1.9
4	2483.50	53.8 AV	54.0	-0.2	1.00 V	110	55.7	-1.9
5	4924.00	46.4 PK	74.0	-27.6	1.27 V	50	43.7	2.7
6	4924.00	44.9 AV	54.0	-9.1	1.27 V	50	42.2	2.7
7	7386.00	43.7 PK	74.0	-30.3	1.22 V	172	34.7	9.0
8	7386.00	36.3 AV	54.0	-17.7	1.22 V	172	27.3	9.0
9	#9848.00	-	-	-	-	-	-	-
10	12310.00	-	-	-	-	-	-	-
11	#14772.00	-	-	-	-	-	-	-
12	#17234.00	-	-	-	-	-	-	-
13	19696.00	-	-	-	-	-	-	-
14	22158.00	-	-	-	-	-	-	-
15	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

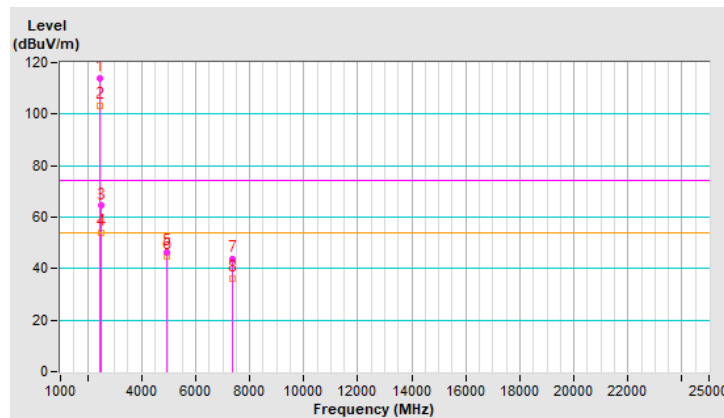


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 12：2467 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	99.8 PK			3.95 H	170	101.7	-1.9
2	*2467.00	90.2 AV			3.95 H	170	92.1	-1.9
3	2483.50	56.8 PK	74.0	-17.2	3.95 H	170	58.7	-1.9
4	2483.50	46.2 AV	54.0	-7.8	3.95 H	170	48.1	-1.9
5	4934.00	43.7 PK	74.0	-30.3	1.32 H	125	41.0	2.7
6	4934.00	42.6 AV	54.0	-11.4	1.32 H	125	39.9	2.7
7	7401.00	42.6 PK	74.0	-31.4	1.34 H	162	33.7	8.9
8	7401.00	32.5 AV	54.0	-21.5	1.34 H	162	23.6	8.9
9	#9868.00	-	-	-	-	-	-	-
10	12335.00	-	-	-	-	-	-	-
11	#14802.00	-	-	-	-	-	-	-
12	#17269.00	-	-	-	-	-	-	-
13	19736.00	-	-	-	-	-	-	-
14	22203.00	-	-	-	-	-	-	-
15	#24670.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

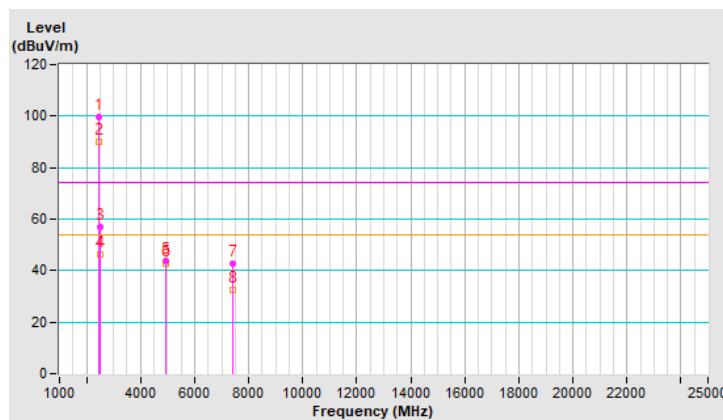


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 12：2467 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.3 PK			1.43 V	139	110.2	-1.9
2	*2467.00	98.3 AV			1.43 V	139	100.2	-1.9
3	2484.10	69.0 PK	74.0	-5.0	1.43 V	139	70.9	-1.9
4	2484.10	53.2 AV	54.0	-0.8	1.43 V	139	55.1	-1.9
5	4934.00	41.7 PK	74.0	-32.3	1.29 V	43	39.0	2.7
6	4934.00	40.5 AV	54.0	-13.5	1.29 V	43	37.8	2.7
7	7401.00	43.2 PK	74.0	-30.8	1.19 V	193	34.3	8.9
8	7401.00	34.4 AV	54.0	-19.6	1.19 V	193	25.5	8.9
9	#9868.00	-	-	-	-	-	-	-
10	12335.00	-	-	-	-	-	-	-
11	#14802.00	-	-	-	-	-	-	-
12	#17269.00	-	-	-	-	-	-	-
13	19736.00	-	-	-	-	-	-	-
14	22203.00	-	-	-	-	-	-	-
15	#24670.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

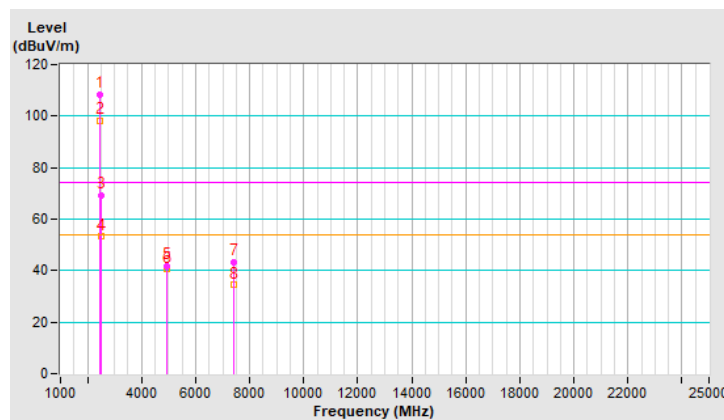


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 13：2472 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	96.0 PK			3.95 H	171	97.9	-1.9
2	*2472.00	85.5 AV			3.95 H	171	87.4	-1.9
3	2485.25	57.1 PK	74.0	-16.9	3.95 H	171	59.0	-1.9
4	2485.25	45.2 AV	54.0	-8.8	3.95 H	171	47.1	-1.9
5	4944.00	43.9 PK	74.0	-30.1	1.33 H	120	41.1	2.8
6	4944.00	41.4 AV	54.0	-12.6	1.33 H	120	38.6	2.8
7	7416.00	42.7 PK	74.0	-31.3	1.34 H	176	33.7	9.0
8	7416.00	32.6 AV	54.0	-21.4	1.34 H	176	23.6	9.0
9	#9888.00	-	-	-	-	-	-	-
10	12360.00	-	-	-	-	-	-	-
11	#14832.00	-	-	-	-	-	-	-
12	#17304.00	-	-	-	-	-	-	-
13	19776.00	-	-	-	-	-	-	-
14	22248.00	-	-	-	-	-	-	-
15	#24720.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

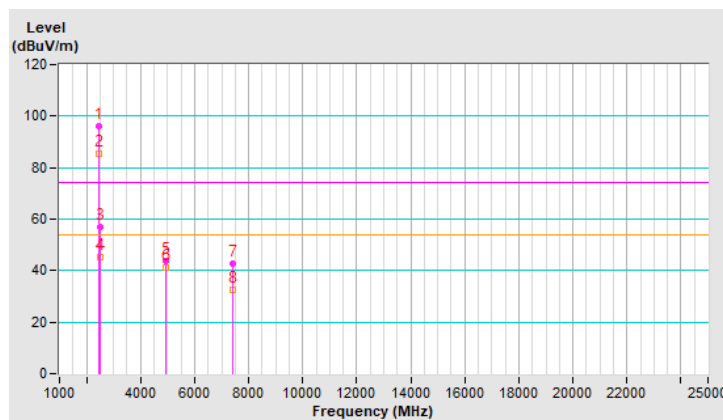


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 13：2472 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.8 PK			1.17 V	286	107.7	-1.9
2	*2472.00	95.0 AV			1.17 V	286	96.9	-1.9
3	2483.50	65.4 PK	74.0	-8.6	1.17 V	286	67.3	-1.9
4	2483.50	53.3 AV	54.0	-0.7	1.17 V	286	55.2	-1.9
5	4944.00	41.9 PK	74.0	-32.1	1.41 V	41	39.1	2.8
6	4944.00	40.1 AV	54.0	-13.9	1.41 V	41	37.3	2.8
7	7416.00	44.1 PK	74.0	-29.9	1.21 V	188	35.1	9.0
8	7416.00	35.2 AV	54.0	-18.8	1.21 V	188	26.2	9.0
9	#9888.00	-	-	-	-	-	-	-
10	12360.00	-	-	-	-	-	-	-
11	#14832.00	-	-	-	-	-	-	-
12	#17304.00	-	-	-	-	-	-	-
13	19776.00	-	-	-	-	-	-	-
14	22248.00	-	-	-	-	-	-	-
15	#24720.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

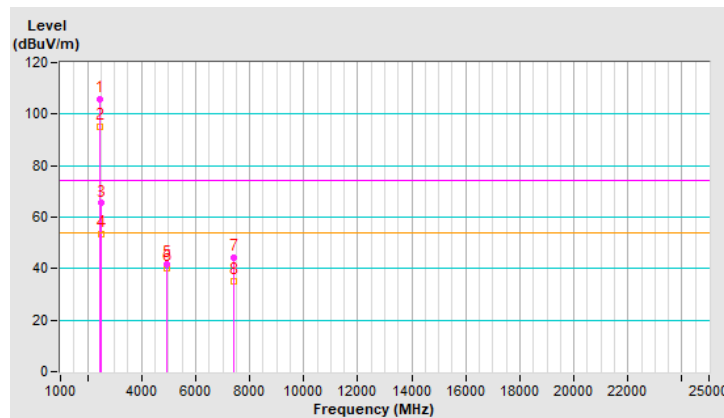


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 3：2422 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	2.70 H	164	58.5	-1.9
2	2390.00	44.0 AV	54.0	-10.0	2.70 H	164	45.9	-1.9
3	*2422.00	99.7 PK			2.70 H	164	101.6	-1.9
4	*2422.00	88.5 AV			2.70 H	164	90.4	-1.9
5	4844.00	48.8 PK	74.0	-25.2	1.39 H	168	45.9	2.9
6	4844.00	46.0 AV	54.0	-8.0	1.39 H	168	43.1	2.9
7	7266.00	43.9 PK	74.0	-30.1	1.24 H	161	35.1	8.8
8	7266.00	33.6 AV	54.0	-20.4	1.24 H	161	24.8	8.8
9	#9688.00	-	-	-	-	-	-	-
10	12110.00	-	-	-	-	-	-	-
11	#14532.00	-	-	-	-	-	-	-
12	#16954.00	-	-	-	-	-	-	-
13	19376.00	-	-	-	-	-	-	-
14	#21798.00	-	-	-	-	-	-	-
15	#24220.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

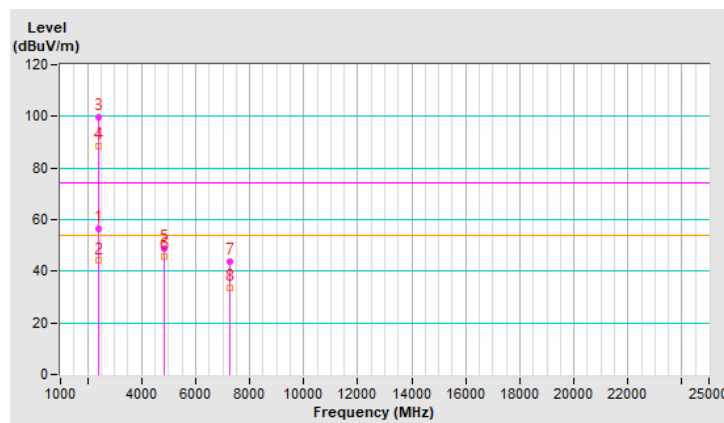


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 3：2422 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2384.10	65.8 PK	74.0	-8.2	1.00 V	102	67.7	-1.9
2	2384.10	50.6 AV	54.0	-3.4	1.00 V	102	52.5	-1.9
3	2390.00	63.2 PK	74.0	-10.8	1.00 V	102	65.1	-1.9
4	2390.00	53.5 AV	54.0	-0.5	1.00 V	102	55.4	-1.9
5	*2422.00	109.1 PK			1.00 V	102	111.0	-1.9
6	*2422.00	99.1 AV			1.00 V	102	101.0	-1.9
7	4844.00	45.4 PK	74.0	-28.6	1.38 V	40	42.5	2.9
8	4844.00	43.5 AV	54.0	-10.5	1.38 V	40	40.6	2.9
9	7266.00	46.6 PK	74.0	-27.4	1.23 V	176	37.8	8.8
10	7266.00	36.9 AV	54.0	-17.1	1.23 V	176	28.1	8.8
11	#9688.00	-	-	-	-	-	-	-
12	12110.00	-	-	-	-	-	-	-
13	#14532.00	-	-	-	-	-	-	-
14	#16954.00	-	-	-	-	-	-	-
15	19376.00	-	-	-	-	-	-	-
16	#21798.00	-	-	-	-	-	-	-
17	#24220.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

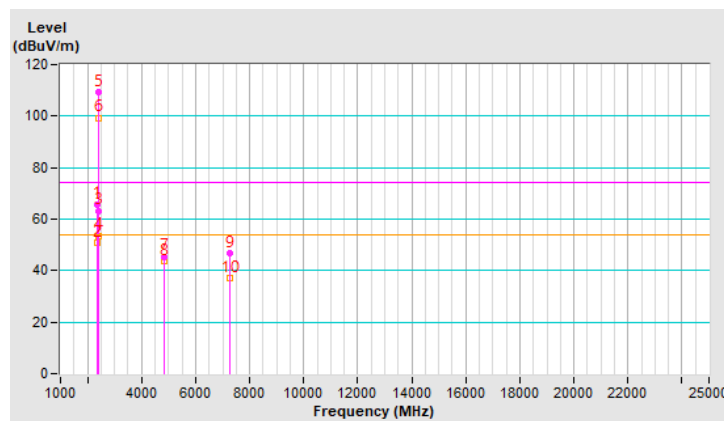


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 4：2427 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.3 PK	74.0	-17.7	2.68 H	149	58.2	-1.9
2	2390.00	43.7 AV	54.0	-10.3	2.68 H	149	45.6	-1.9
3	*2427.00	99.8 PK			2.68 H	149	101.8	-2.0
4	*2427.00	89.2 AV			2.68 H	149	91.2	-2.0
5	4854.00	48.6 PK	74.0	-25.4	1.43 H	156	45.8	2.8
6	4854.00	45.6 AV	54.0	-8.4	1.43 H	156	42.8	2.8
7	7281.00	44.4 PK	74.0	-29.6	1.27 H	164	35.6	8.8
8	7281.00	34.1 AV	54.0	-19.9	1.27 H	164	25.3	8.8
9	#9708.00	-	-	-	-	-	-	-
10	12135.00	-	-	-	-	-	-	-
11	#14562.00	-	-	-	-	-	-	-
12	#16989.00	-	-	-	-	-	-	-
13	19416.00	-	-	-	-	-	-	-
14	#21843.00	-	-	-	-	-	-	-
15	#24270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

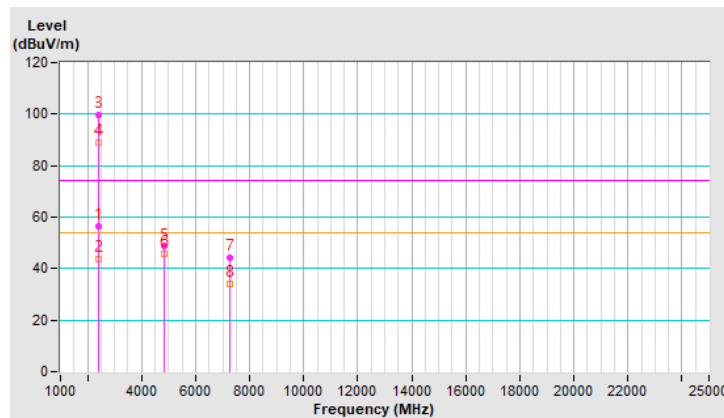


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 4：2427 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	1.07 V	105	65.4	-1.9
2	2390.00	53.9 AV	54.0	-0.1	1.07 V	105	55.8	-1.9
3	*2427.00	109.8 PK			1.07 V	105	111.8	-2.0
4	*2427.00	99.7 AV			1.07 V	105	101.7	-2.0
5	4854.00	45.5 PK	74.0	-28.5	1.28 V	48	42.7	2.8
6	4854.00	43.8 AV	54.0	-10.2	1.28 V	48	41.0	2.8
7	7281.00	46.5 PK	74.0	-27.5	1.26 V	176	37.7	8.8
8	7281.00	36.7 AV	54.0	-17.3	1.26 V	176	27.9	8.8
9	#9708.00	-	-	-	-	-	-	-
10	12135.00	-	-	-	-	-	-	-
11	#14562.00	-	-	-	-	-	-	-
12	#16989.00	-	-	-	-	-	-	-
13	19416.00	-	-	-	-	-	-	-
14	#21843.00	-	-	-	-	-	-	-
15	#24270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

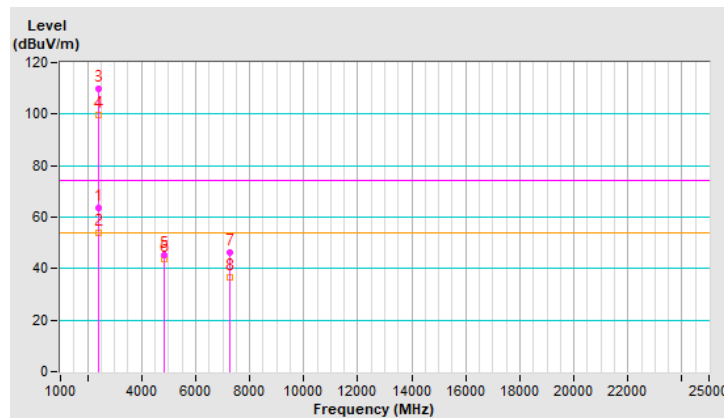


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 6：2437 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	2.65 H	149	58.5	-1.9
2	2390.00	44.2 AV	54.0	-9.8	2.65 H	149	46.1	-1.9
3	*2437.00	100.4 PK			2.65 H	149	102.4	-2.0
4	*2437.00	89.6 AV			2.65 H	149	91.6	-2.0
5	2483.50	56.7 PK	74.0	-17.3	2.65 H	149	58.6	-1.9
6	2483.50	44.5 AV	54.0	-9.5	2.65 H	149	46.4	-1.9
7	4874.00	48.7 PK	74.0	-25.3	1.46 H	155	45.9	2.8
8	4874.00	45.6 AV	54.0	-8.4	1.46 H	155	42.8	2.8
9	7311.00	45.1 PK	74.0	-28.9	1.26 H	149	36.2	8.9
10	7311.00	34.6 AV	54.0	-19.4	1.26 H	149	25.7	8.9
11	#9748.00	-	-	-	-	-	-	-
12	12185.00	-	-	-	-	-	-	-
13	#14622.00	-	-	-	-	-	-	-
14	#17059.00	-	-	-	-	-	-	-
15	19496.00	-	-	-	-	-	-	-
16	#21933.00	-	-	-	-	-	-	-
17	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

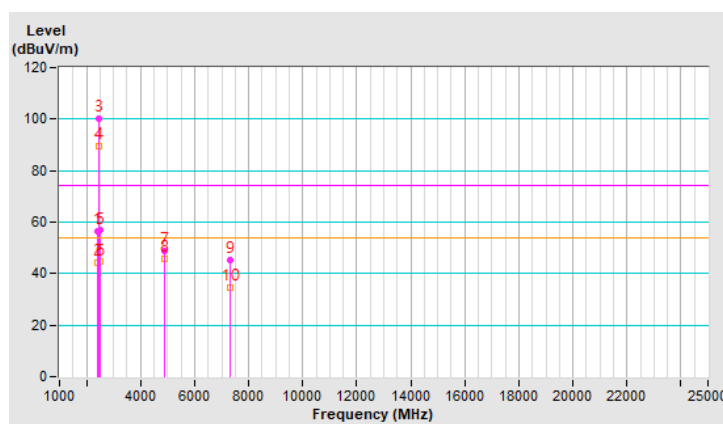


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 6：2437 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.4 PK	74.0	-10.6	1.54 V	116	65.3	-1.9
2	2390.00	53.5 AV	54.0	-0.5	1.54 V	116	55.4	-1.9
3	*2437.00	110.1 PK			1.54 V	116	112.1	-2.0
4	*2437.00	100.6 AV			1.54 V	116	102.6	-2.0
5	2483.50	64.0 PK	74.0	-10.0	1.54 V	116	65.9	-1.9
6	2483.50	53.8 AV	54.0	-0.2	1.54 V	116	55.7	-1.9
7	4874.00	45.3 PK	74.0	-28.7	1.33 V	38	42.5	2.8
8	4874.00	43.6 AV	54.0	-10.4	1.33 V	38	40.8	2.8
9	7311.00	46.4 PK	74.0	-27.6	1.23 V	172	37.5	8.9
10	7311.00	36.5 AV	54.0	-17.5	1.23 V	172	27.6	8.9
11	#9748.00	-	-	-	-	-	-	-
12	12185.00	-	-	-	-	-	-	-
13	#14622.00	-	-	-	-	-	-	-
14	#17059.00	-	-	-	-	-	-	-
15	19496.00	-	-	-	-	-	-	-
16	#21933.00	-	-	-	-	-	-	-
17	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

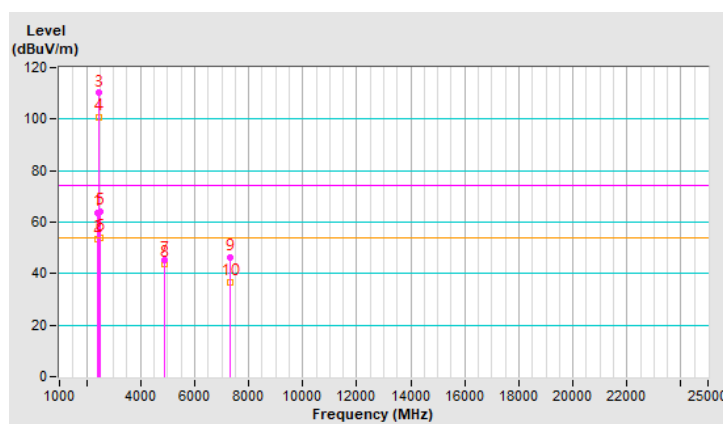


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 8：2447 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2447.00	99.5 PK			2.69 H	144	101.4	-1.9
2	*2447.00	89.1 AV			2.69 H	144	91.0	-1.9
3	2483.50	58.7 PK	74.0	-15.3	2.69 H	144	60.6	-1.9
4	2483.50	45.5 AV	54.0	-8.5	2.69 H	144	47.4	-1.9
5	4894.00	48.5 PK	74.0	-25.5	1.48 H	147	45.8	2.7
6	4894.00	45.2 AV	54.0	-8.8	1.48 H	147	42.5	2.7
7	7341.00	45.2 PK	74.0	-28.8	1.29 H	141	36.2	9.0
8	7341.00	34.9 AV	54.0	-19.1	1.29 H	141	25.9	9.0
9	#9788.00	-	-	-	-	-	-	-
10	12235.00	-	-	-	-	-	-	-
11	#14682.00	-	-	-	-	-	-	-
12	#17129.00	-	-	-	-	-	-	-
13	19576.00	-	-	-	-	-	-	-
14	22023.00	-	-	-	-	-	-	-
15	#24470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

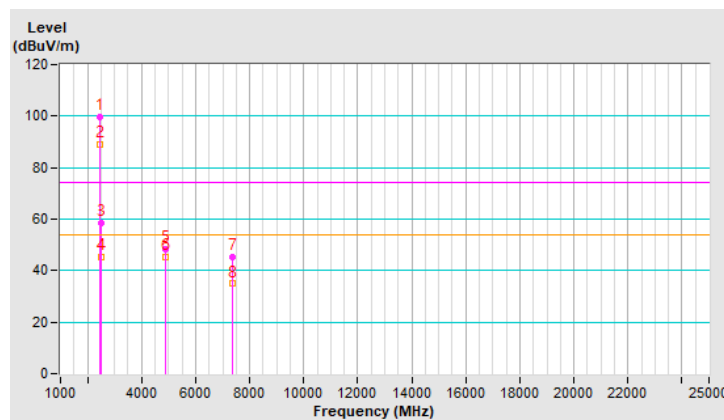


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 8：2447 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2447.00	110.1 PK			1.08 V	107	112.0	-1.9
2	*2447.00	100.0 AV			1.08 V	107	101.9	-1.9
3	2483.50	69.1 PK	74.0	-4.9	1.08 V	107	71.0	-1.9
4	2483.50	53.6 AV	54.0	-0.4	1.08 V	107	55.5	-1.9
5	4894.00	45.0 PK	74.0	-29.0	1.28 V	51	42.3	2.7
6	4894.00	43.5 AV	54.0	-10.5	1.28 V	51	40.8	2.7
7	7341.00	47.0 PK	74.0	-27.0	1.28 V	161	38.0	9.0
8	7341.00	36.9 AV	54.0	-17.1	1.28 V	161	27.9	9.0
9	#9788.00	-	-	-	-	-	-	-
10	12235.00	-	-	-	-	-	-	-
11	#14682.00	-	-	-	-	-	-	-
12	#17129.00	-	-	-	-	-	-	-
13	19576.00	-	-	-	-	-	-	-
14	22023.00	-	-	-	-	-	-	-
15	#24470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

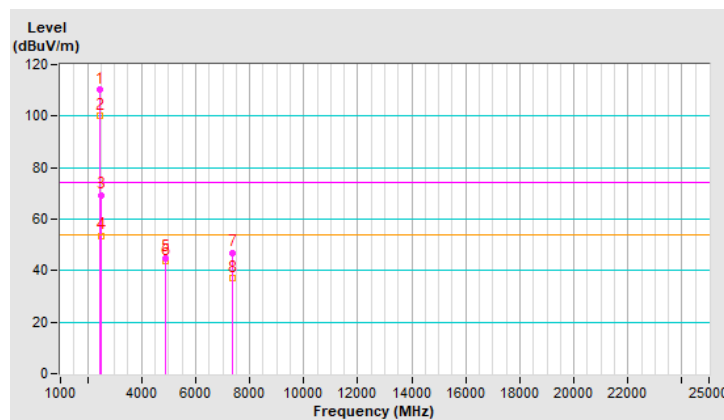


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 9：2452 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	99.7 PK			3.60 H	175	101.6	-1.9
2	*2452.00	89.9 AV			3.60 H	175	91.8	-1.9
3	2485.00	58.4 PK	74.0	-15.6	3.60 H	175	60.3	-1.9
4	2485.00	45.0 AV	54.0	-9.0	3.60 H	175	46.9	-1.9
5	4904.00	48.8 PK	74.0	-25.2	1.39 H	142	46.1	2.7
6	4904.00	45.8 AV	54.0	-8.2	1.39 H	142	43.1	2.7
7	7356.00	44.6 PK	74.0	-29.4	1.29 H	178	35.7	8.9
8	7356.00	34.4 AV	54.0	-19.6	1.29 H	178	25.5	8.9
9	#9808.00	-	-	-	-	-	-	-
10	12260.00	-	-	-	-	-	-	-
11	#14712.00	-	-	-	-	-	-	-
12	#17164.00	-	-	-	-	-	-	-
13	19616.00	-	-	-	-	-	-	-
14	22068.00	-	-	-	-	-	-	-
15	#24520.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

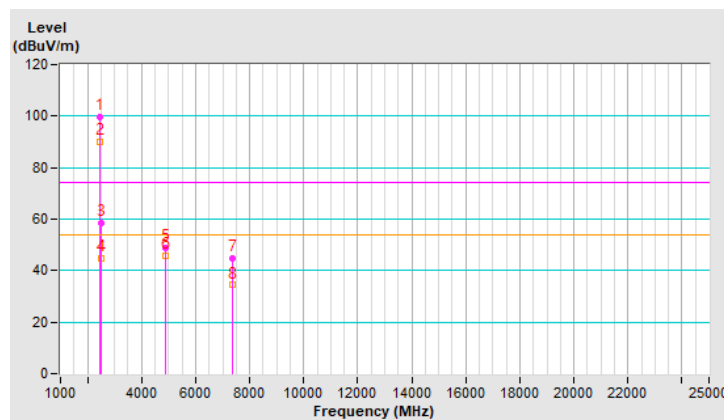


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 9：2452 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.7 PK			1.10 V	108	110.6	-1.9
2	*2452.00	99.6 AV			1.10 V	108	101.5	-1.9
3	2484.40	69.1 PK	74.0	-4.9	1.10 V	108	71.0	-1.9
4	2484.40	53.9 AV	54.0	-0.1	1.10 V	108	55.8	-1.9
5	4904.00	45.3 PK	74.0	-28.7	1.28 V	37	42.6	2.7
6	4904.00	43.6 AV	54.0	-10.4	1.28 V	37	40.9	2.7
7	7356.00	46.8 PK	74.0	-27.2	1.23 V	184	37.9	8.9
8	7356.00	36.9 AV	54.0	-17.1	1.23 V	184	28.0	8.9
9	#9808.00	-	-	-	-	-	-	-
10	12260.00	-	-	-	-	-	-	-
11	#14712.00	-	-	-	-	-	-	-
12	#17164.00	-	-	-	-	-	-	-
13	19616.00	-	-	-	-	-	-	-
14	22068.00	-	-	-	-	-	-	-
15	#24520.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

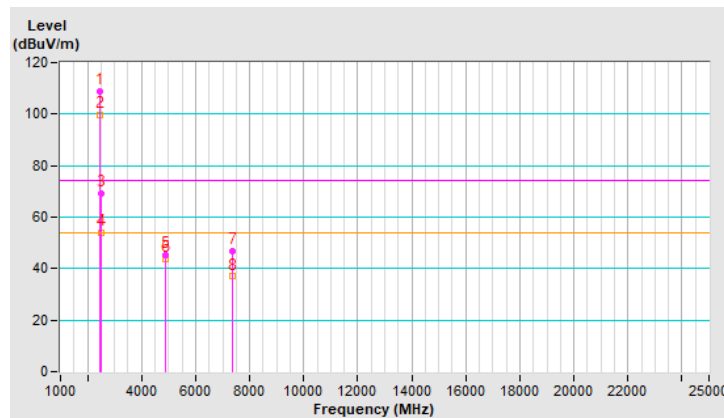


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 10：2457 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	96.5 PK			3.60 H	175	98.4	-1.9
2	*2457.00	85.8 AV			3.60 H	175	87.7	-1.9
3	2483.50	55.4 PK	74.0	-18.6	3.60 H	175	57.3	-1.9
4	2483.50	44.0 AV	54.0	-10.0	3.60 H	175	45.9	-1.9
5	4914.00	43.4 PK	74.0	-30.6	1.37 H	139	40.7	2.7
6	4914.00	42.2 AV	54.0	-11.8	1.37 H	139	39.5	2.7
7	7371.00	42.3 PK	74.0	-31.7	1.33 H	149	33.4	8.9
8	7371.00	32.1 AV	54.0	-21.9	1.33 H	149	23.2	8.9
9	#9828.00	-	-	-	-	-	-	-
10	12285.00	-	-	-	-	-	-	-
11	#14742.00	-	-	-	-	-	-	-
12	#17199.00	-	-	-	-	-	-	-
13	19656.00	-	-	-	-	-	-	-
14	22113.00	-	-	-	-	-	-	-
15	#24570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

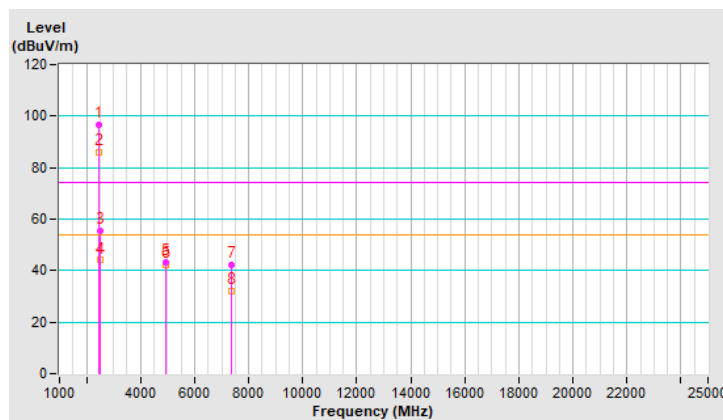


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 10：2457 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.3 PK			1.50 V	147	106.2	-1.9
2	*2457.00	94.6 AV			1.50 V	147	96.5	-1.9
3	2483.50	63.8 PK	74.0	-10.2	1.50 V	147	65.7	-1.9
4	2483.50	51.6 AV	54.0	-2.4	1.50 V	147	53.5	-1.9
5	4914.00	41.3 PK	74.0	-32.7	1.26 V	36	38.6	2.7
6	4914.00	40.2 AV	54.0	-13.8	1.26 V	36	37.5	2.7
7	7371.00	43.8 PK	74.0	-30.2	1.20 V	184	34.9	8.9
8	7371.00	34.7 AV	54.0	-19.3	1.20 V	184	25.8	8.9
9	#9828.00	-	-	-	-	-	-	-
10	12285.00	-	-	-	-	-	-	-
11	#14742.00	-	-	-	-	-	-	-
12	#17199.00	-	-	-	-	-	-	-
13	19656.00	-	-	-	-	-	-	-
14	22113.00	-	-	-	-	-	-	-
15	#24570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

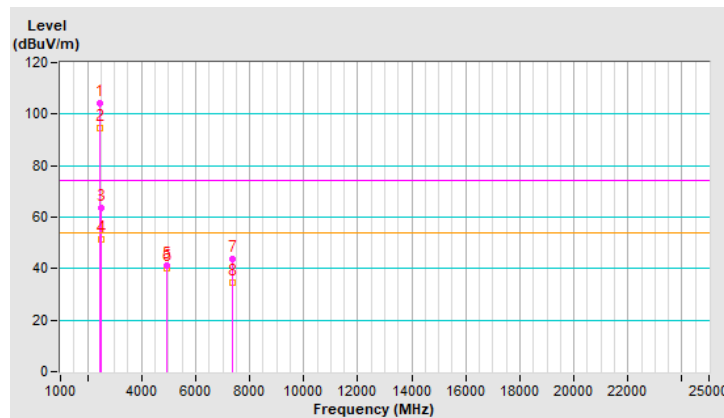


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 11：2462 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.6 PK			4.00 H	172	96.5	-1.9
2	*2462.00	83.2 AV			4.00 H	172	85.1	-1.9
3	2483.50	55.1 PK	74.0	-18.9	4.00 H	172	57.0	-1.9
4	2483.50	45.6 AV	54.0	-8.4	4.00 H	172	47.5	-1.9
5	4924.00	43.7 PK	74.0	-30.3	1.35 H	125	41.0	2.7
6	4924.00	41.3 AV	54.0	-12.7	1.35 H	125	38.6	2.7
7	7386.00	43.0 PK	74.0	-31.0	1.39 H	188	34.0	9.0
8	7386.00	33.0 AV	54.0	-21.0	1.39 H	188	24.0	9.0
9	#9848.00	-	-	-	-	-	-	-
10	12310.00	-	-	-	-	-	-	-
11	#14772.00	-	-	-	-	-	-	-
12	#17234.00	-	-	-	-	-	-	-
13	19696.00	-	-	-	-	-	-	-
14	22158.00	-	-	-	-	-	-	-
15	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

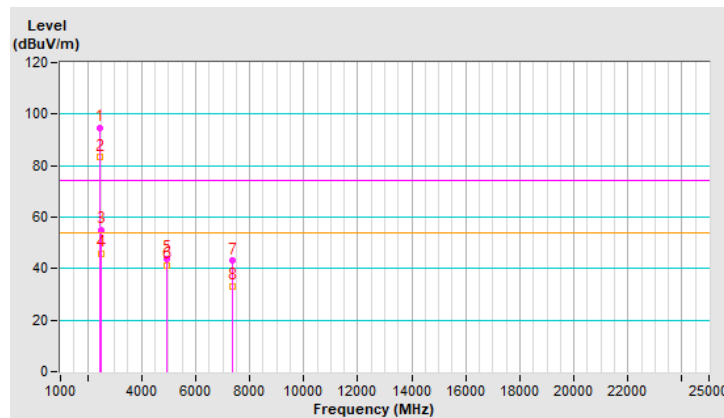


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 11：2462 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.6 PK			1.67 V	242	108.5	-1.9
2	*2462.00	95.1 AV			1.67 V	242	97.0	-1.9
3	2484.66	60.8 PK	74.0	-13.2	1.67 V	242	62.7	-1.9
4	2484.66	53.3 AV	54.0	-0.7	1.67 V	242	55.2	-1.9
5	2486.87	62.7 PK	74.0	-11.3	1.67 V	242	64.6	-1.9
6	2486.87	50.3 AV	54.0	-3.7	1.67 V	242	52.2	-1.9
7	4924.00	41.7 PK	74.0	-32.3	1.13 V	224	39.0	2.7
8	4924.00	31.4 AV	54.0	-22.6	1.13 V	224	28.7	2.7
9	7386.00	42.9 PK	74.0	-31.1	3.19 V	203	33.9	9.0
10	7386.00	33.2 AV	54.0	-20.8	3.19 V	203	24.2	9.0
11	#9848.00	-	-	-	-	-	-	-
12	12310.00	-	-	-	-	-	-	-
13	#14772.00	-	-	-	-	-	-	-
14	#17234.00	-	-	-	-	-	-	-
15	19696.00	-	-	-	-	-	-	-
16	22158.00	-	-	-	-	-	-	-
17	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

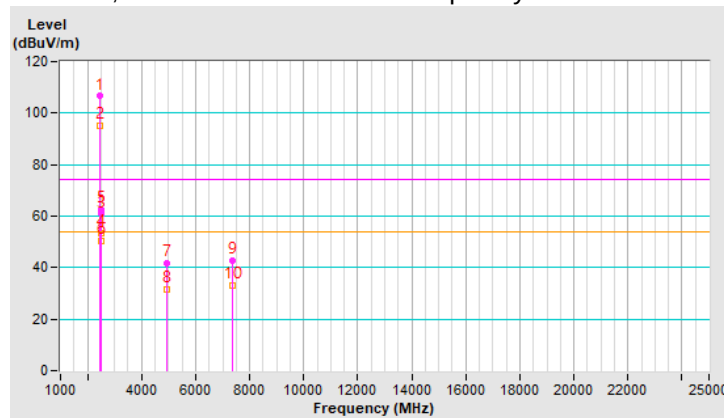


4.7.2 接收諧波

操作模式：	接收		
基本波頻率：	CH 2 : 2417 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.67	40.0 PK	74.0	-34.0	1.08 H	111	45.0	-5.0
2	1624.67	29.7 AV	54.0	-24.3	1.08 H	111	34.7	-5.0
3	3249.33	42.7 PK	74.0	-31.3	2.31 H	205	43.3	-0.6
4	3249.33	35.0 AV	54.0	-19.0	2.31 H	205	35.6	-0.6
5	4874.00	48.6 PK	74.0	-25.4	3.14 H	73	45.8	2.8
6	4874.00	47.4 AV	54.0	-6.6	3.14 H	73	44.6	2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

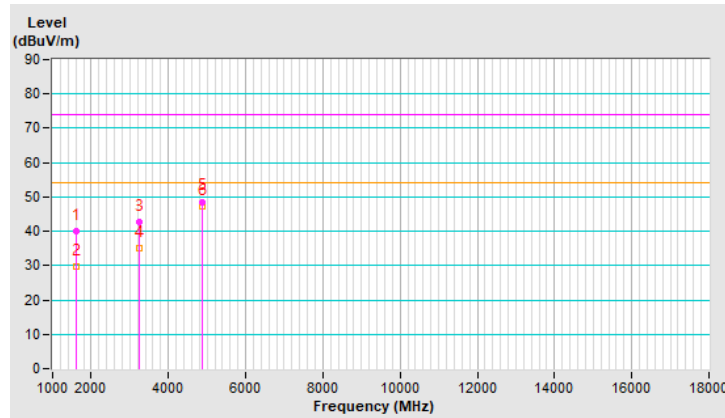


操作模式：	接收		
基本波頻率：	CH 2 : 2417 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.67	38.1 PK	74.0	-35.9	3.51 V	112	43.1	-5.0
2	1624.67	29.9 AV	54.0	-24.1	3.51 V	112	34.9	-5.0
3	3249.33	39.8 PK	74.0	-34.2	1.13 V	195	40.4	-0.6
4	3249.33	30.5 AV	54.0	-23.5	1.13 V	195	31.1	-0.6
5	4874.00	45.8 PK	74.0	-28.2	2.25 V	57	43.0	2.8
6	4874.00	44.7 AV	54.0	-9.3	2.25 V	57	41.9	2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

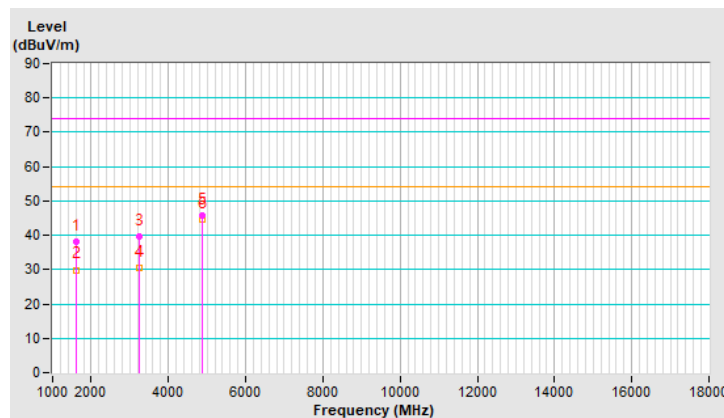

4.7.3 其它不必要之訊號


802.11b

操作模式：	發射接收	調變技術：	DSSS
基本波頻率：	CH 2 : 2417 MHz	測試儀器：	(QP) RB=120kHz
量測場地溫度：	24°C	量測場地濕度：	68%RH
測試日期：	109 年 9 月 16 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.58	32.3 QP	40.0	-7.7	3.00 H	134	41.2	-8.9
2	49.35	26.9 QP	40.0	-13.1	1.00 H	344	34.4	-7.5
3	113.47	24.9 QP	43.5	-18.6	1.00 H	83	34.6	-9.7
4	165.97	33.2 QP	43.5	-10.3	1.50 H	195	40.2	-7.0
5	199.19	40.5 QP	43.5	-3.0	1.00 H	192	50.6	-10.1
6	365.86	33.3 QP	46.0	-12.7	1.00 H	182	37.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

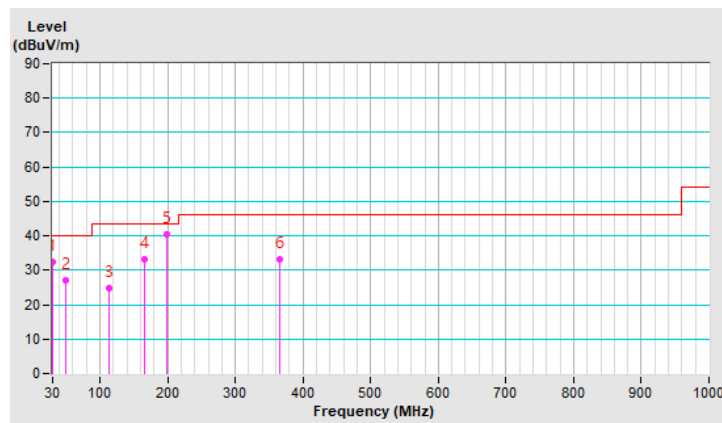


操作模式：	發射接收	調變技術：	DSSS
基本波頻率：	CH 2：2417 MHz	測試儀器：	(QP) RB=120kHz
量測場地溫度：	24℃	量測場地濕度：	68%RH
測試日期：	109 年 9 月 16 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.99	33.9 QP	40.0	-6.1	1.00 V	250	42.1	-8.2
2	99.74	30.1 QP	43.5	-13.4	1.00 V	170	41.8	-11.7
3	129.35	30.3 QP	43.5	-13.2	1.00 V	182	38.5	-8.2
4	199.17	33.3 QP	43.5	-10.2	2.00 V	236	43.4	-10.1
5	299.32	42.1 QP	46.0	-3.9	1.00 V	264	48.0	-5.9
6	365.16	30.3 QP	46.0	-15.7	2.00 V	129	34.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

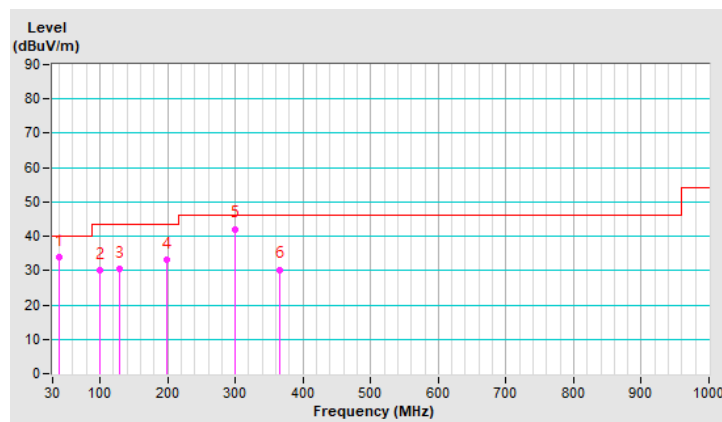


4.8 帶外發射之量測 (傳導)


802.11b

Chain 0


CH 1

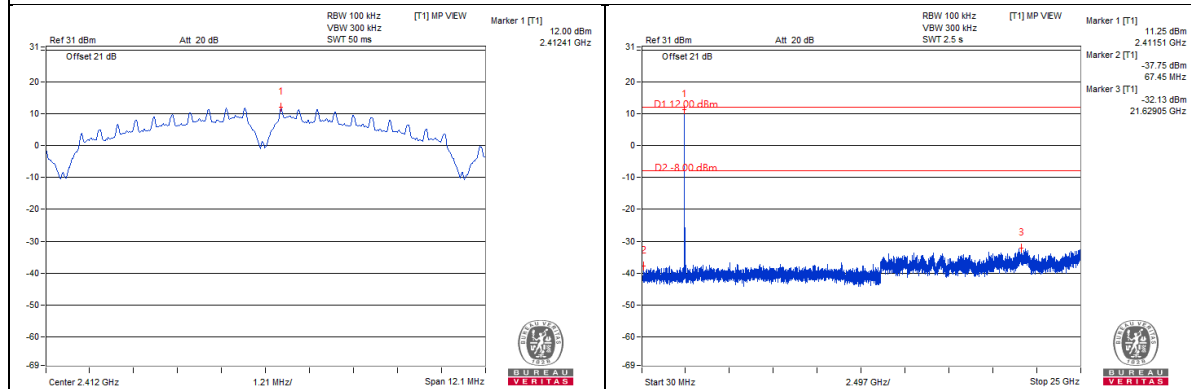


CH 2

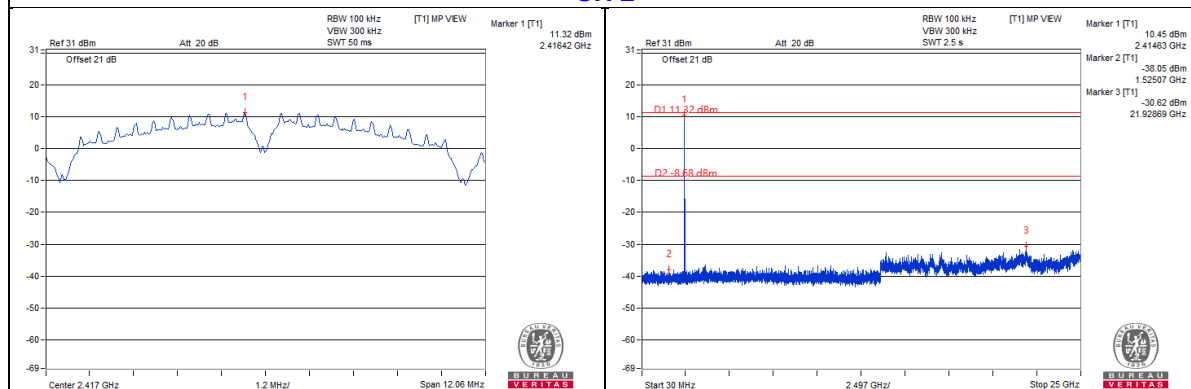


CH 6

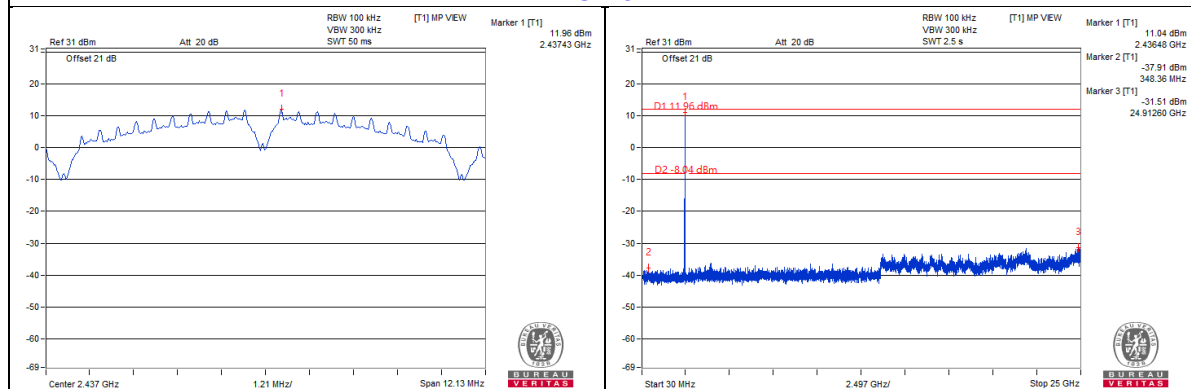


CH 10

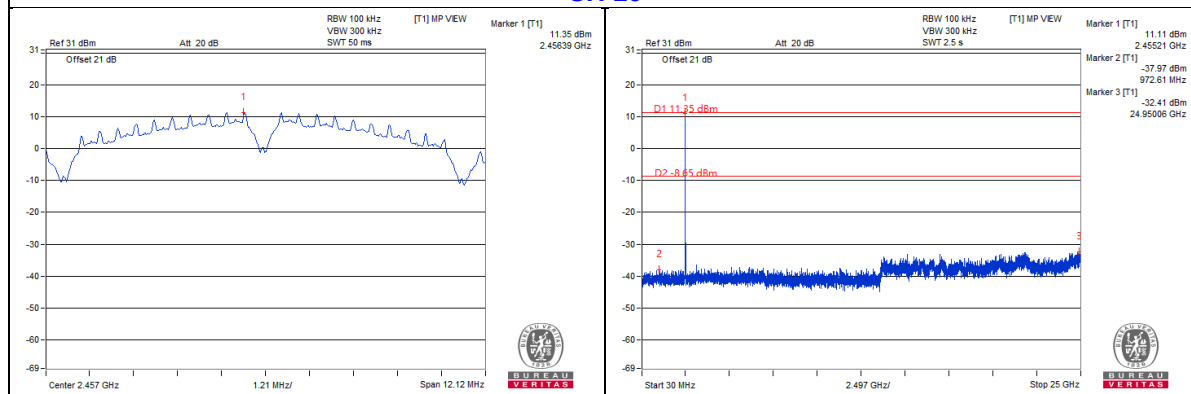


CH 11

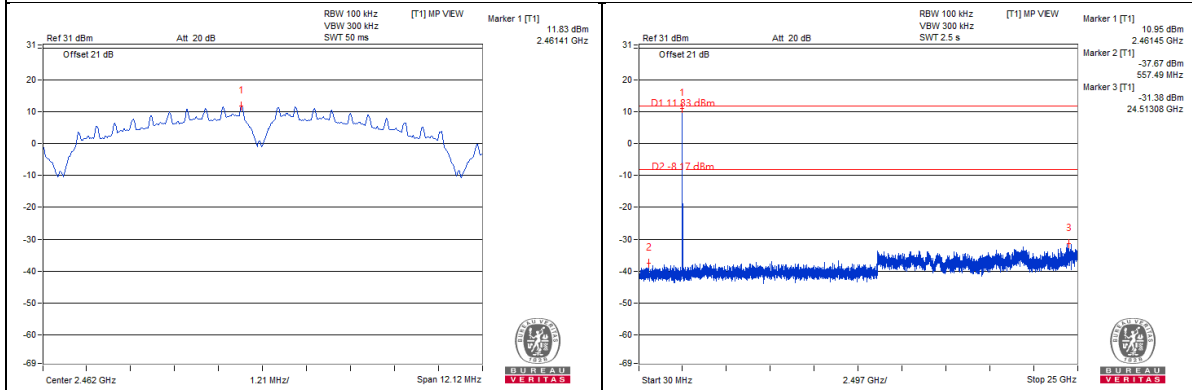


CH 12

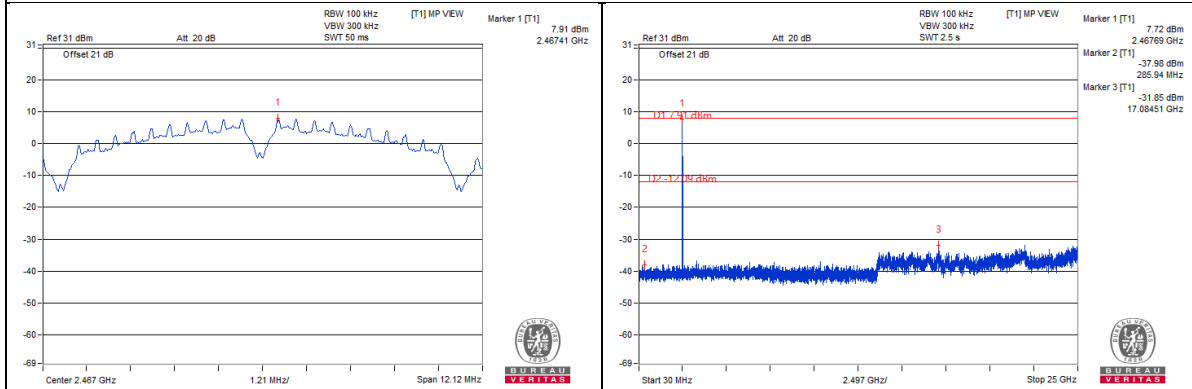


CH 13

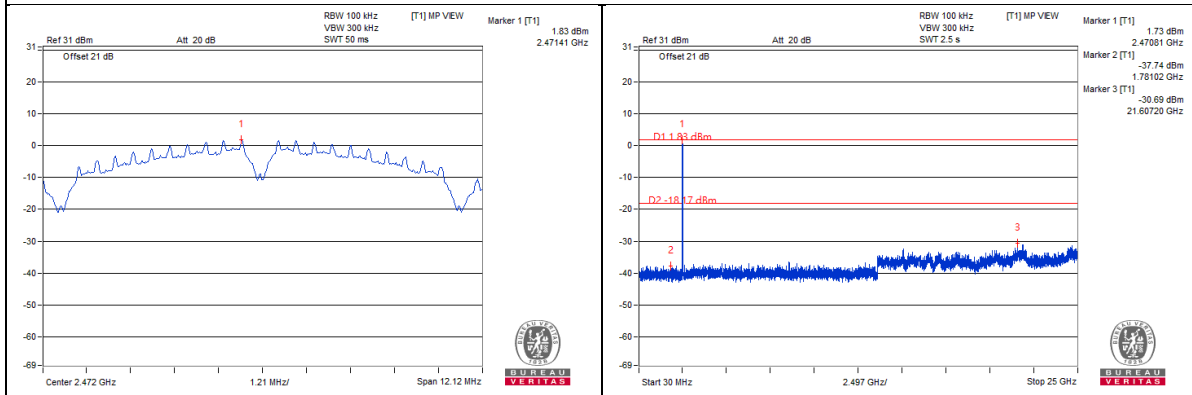


CH 1 Band edge

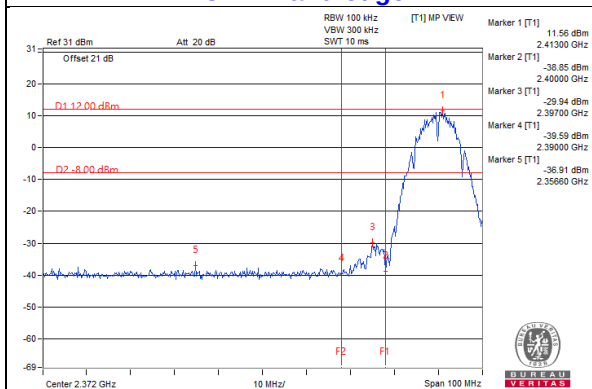

CH 11 Band edge

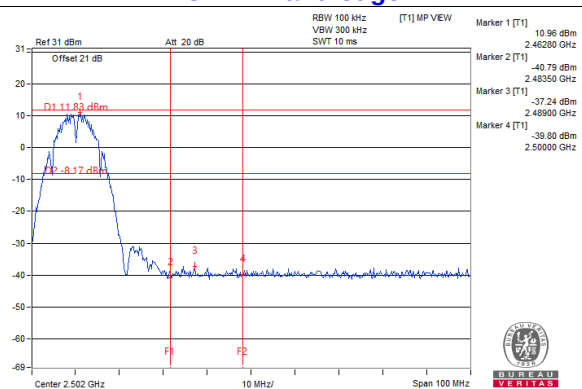

CH 12 Band edge

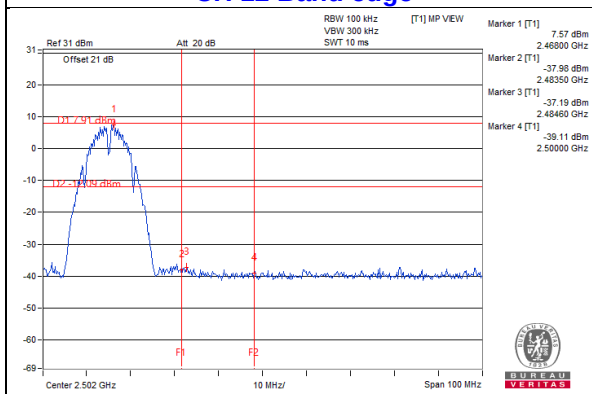

CH 13 Band edge

