


Site: AC1	Time: 2018/09/26 - 07:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5510MHz Ant 0 + 1	

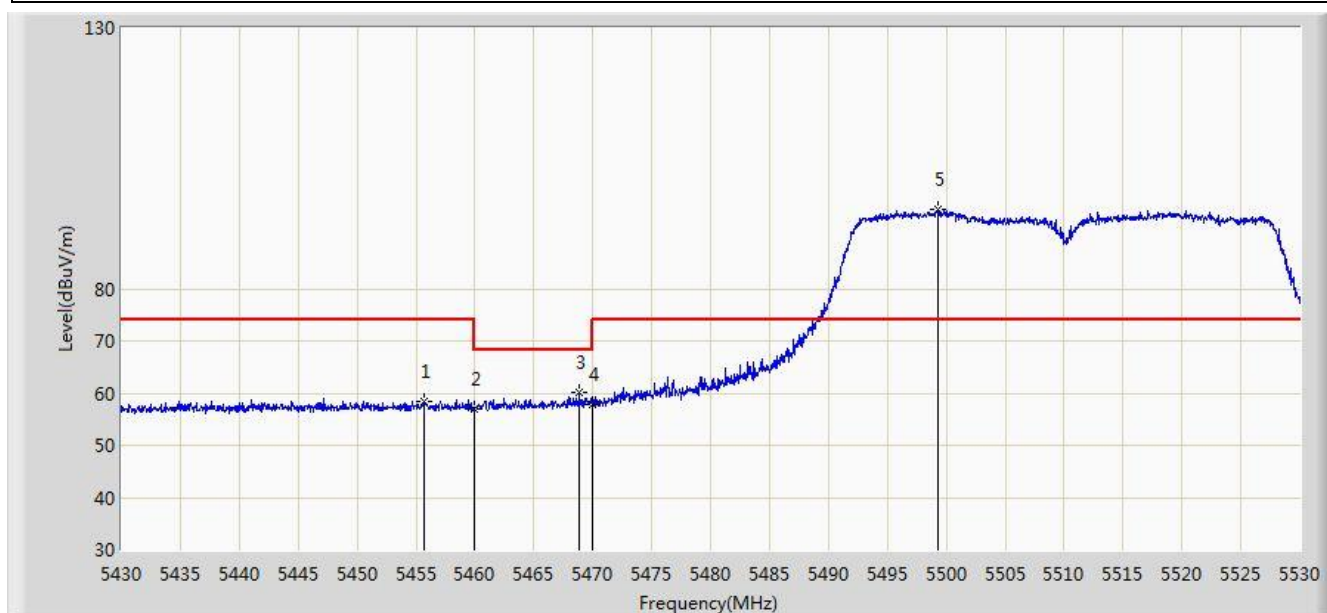


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.750	58.456	54.285	-15.544	74.000	4.171	PK
2			5460.000	57.047	52.867	-16.953	74.000	4.180	PK
3			5468.850	60.065	55.865	-8.135	68.200	4.200	PK
4			5470.000	57.743	53.541	-10.457	68.200	4.202	PK
5		*	5499.350	95.110	90.840	N/A	N/A	4.270	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5510MHz Ant 0 + 1	

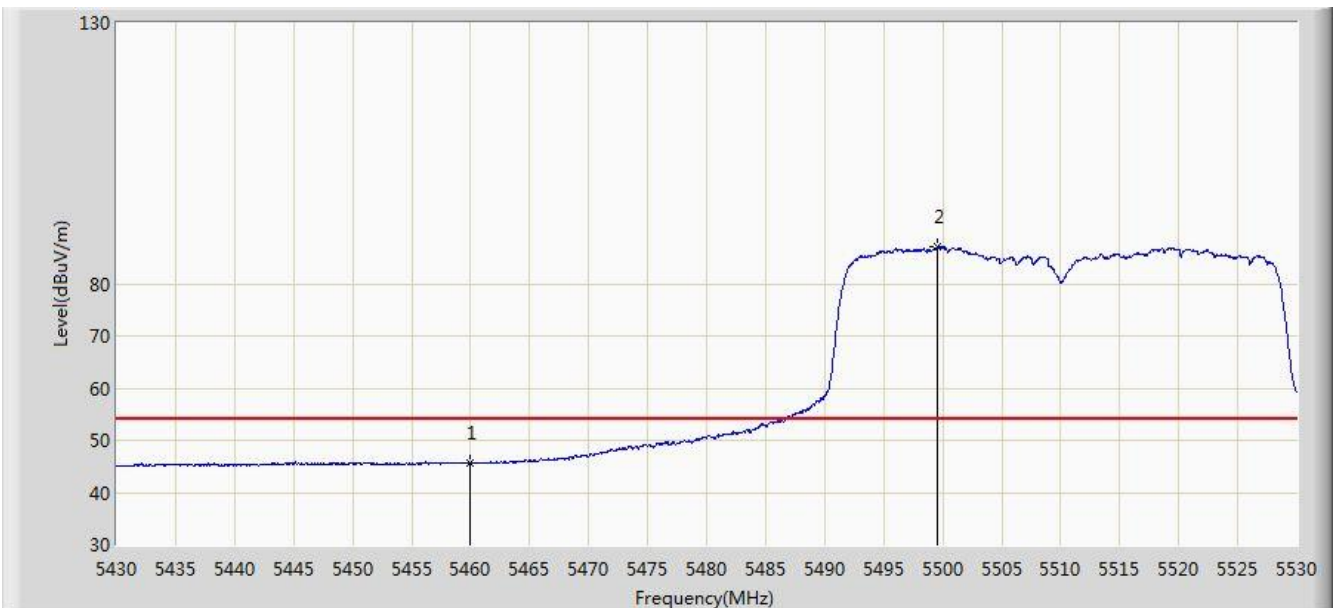


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.641	41.461	-8.359	54.000	4.180	AV
2		*	5499.550	87.061	82.790	N/A	N/A	4.271	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5510MHz Ant 0 + 1	

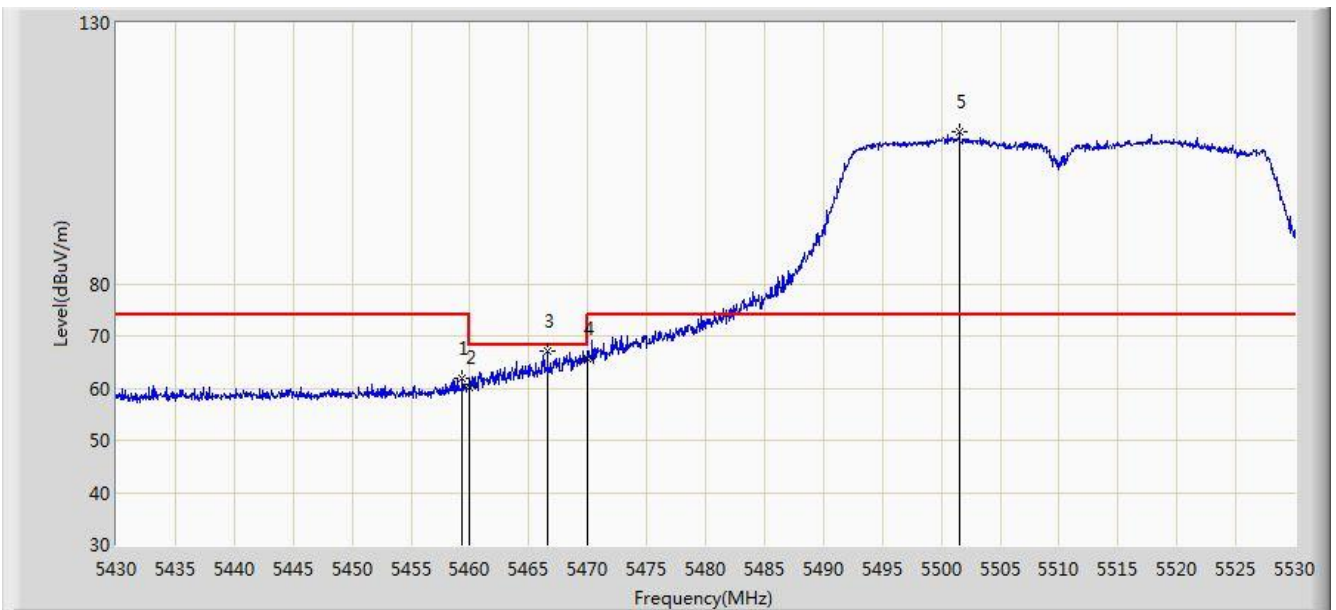


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.350	61.956	57.777	-12.044	74.000	4.178	PK
2			5460.000	60.108	55.928	-13.892	74.000	4.180	PK
3			5466.600	67.170	62.975	-1.030	68.200	4.195	PK
4			5470.000	65.793	61.591	-2.407	68.200	4.202	PK
5		*	5501.550	109.034	104.757	N/A	N/A	4.277	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5510MHz Ant 0 + 1	

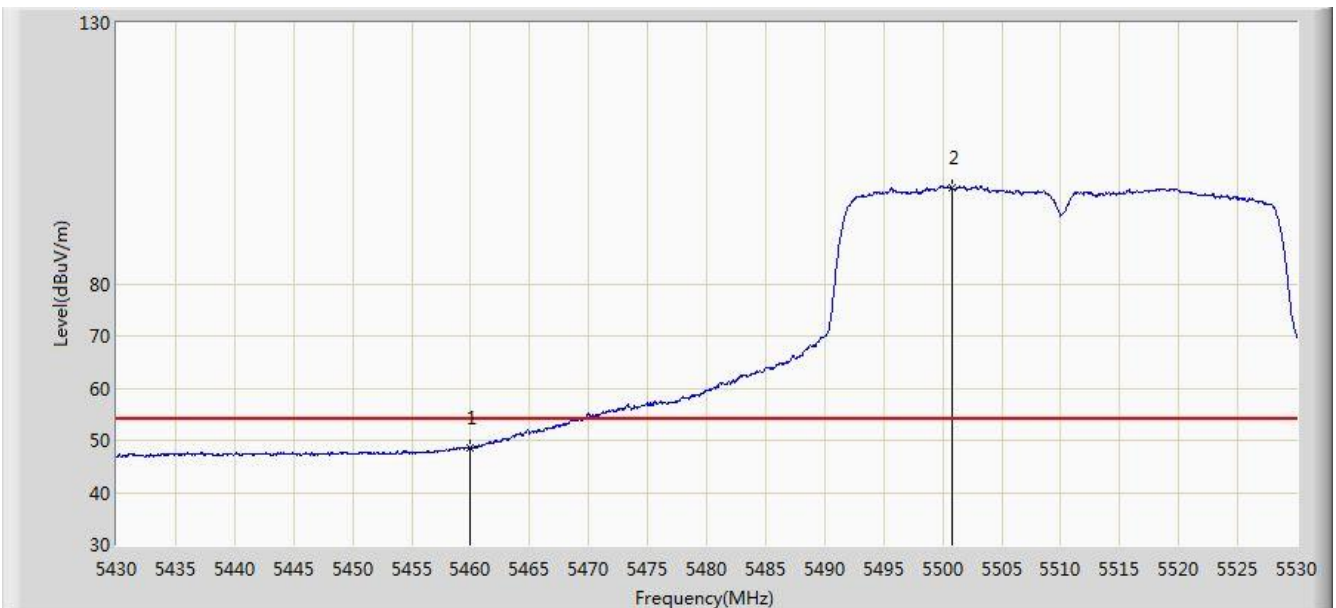


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.462	44.282	-5.538	54.000	4.180	AV
2		*	5500.750	98.481	94.207	N/A	N/A	4.275	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 0 + 1	

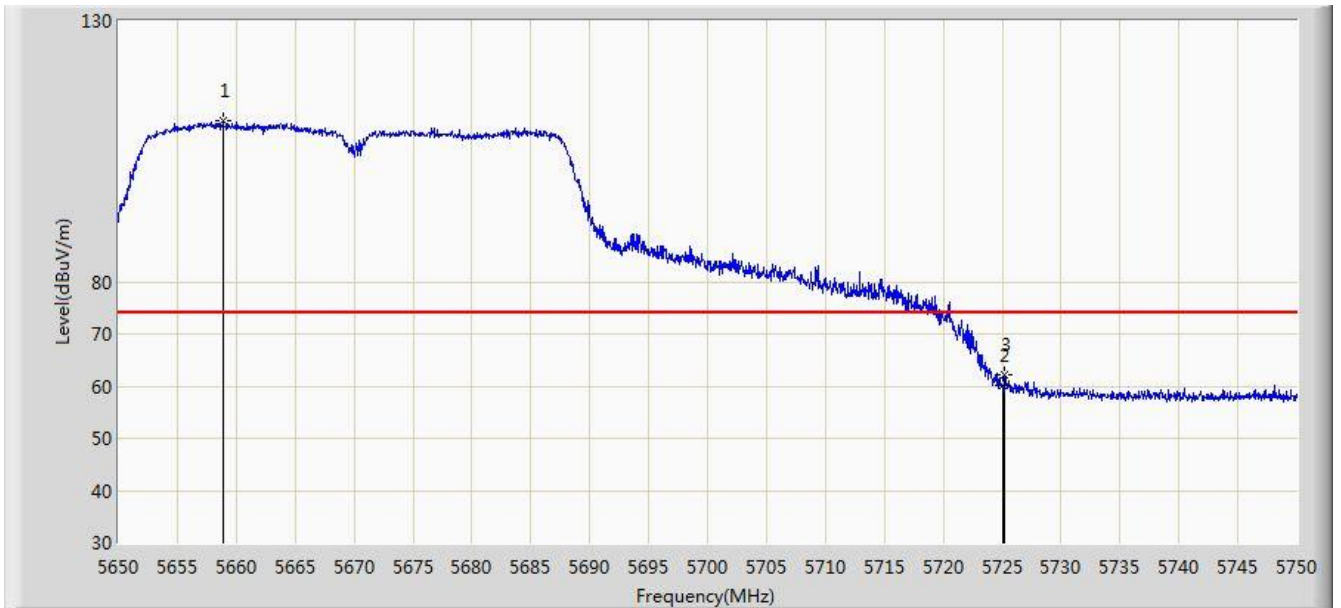


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5658.900	110.945	106.243	N/A	N/A	4.702	PK
2			5725.000	60.232	55.203	-13.768	74.000	5.029	PK
3			5725.250	62.223	57.192	-11.777	74.000	5.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 0 + 1	

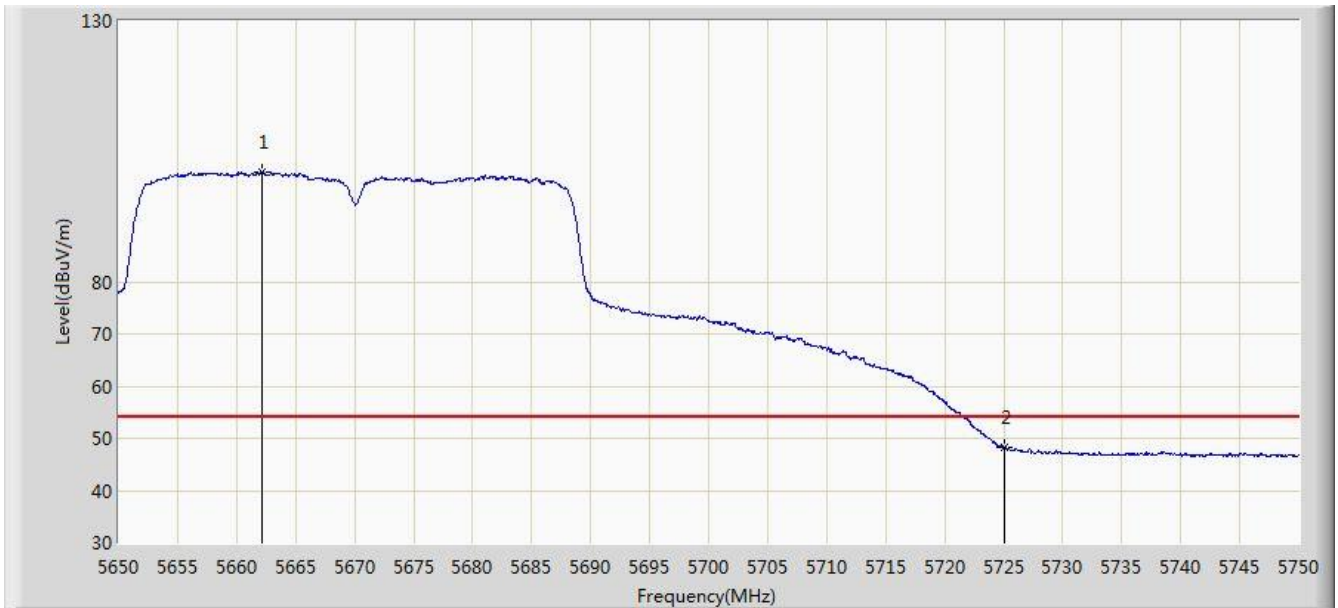


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.150	101.040	96.325	N/A	N/A	4.715	AV
2			5725.000	48.348	43.319	-5.652	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 0 + 1	

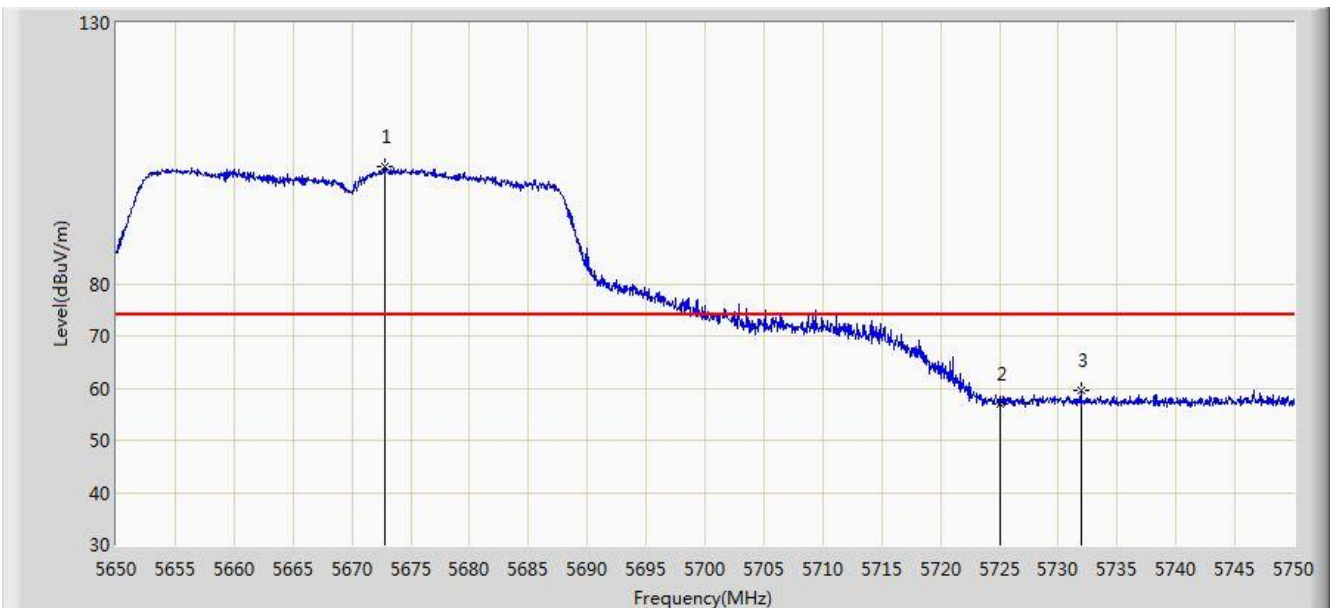


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.750	102.365	97.607	N/A	N/A	4.757	PK
2			5725.000	56.989	51.960	-17.011	74.000	5.029	PK
3			5731.900	59.486	54.413	-14.514	74.000	5.073	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 0 + 1	

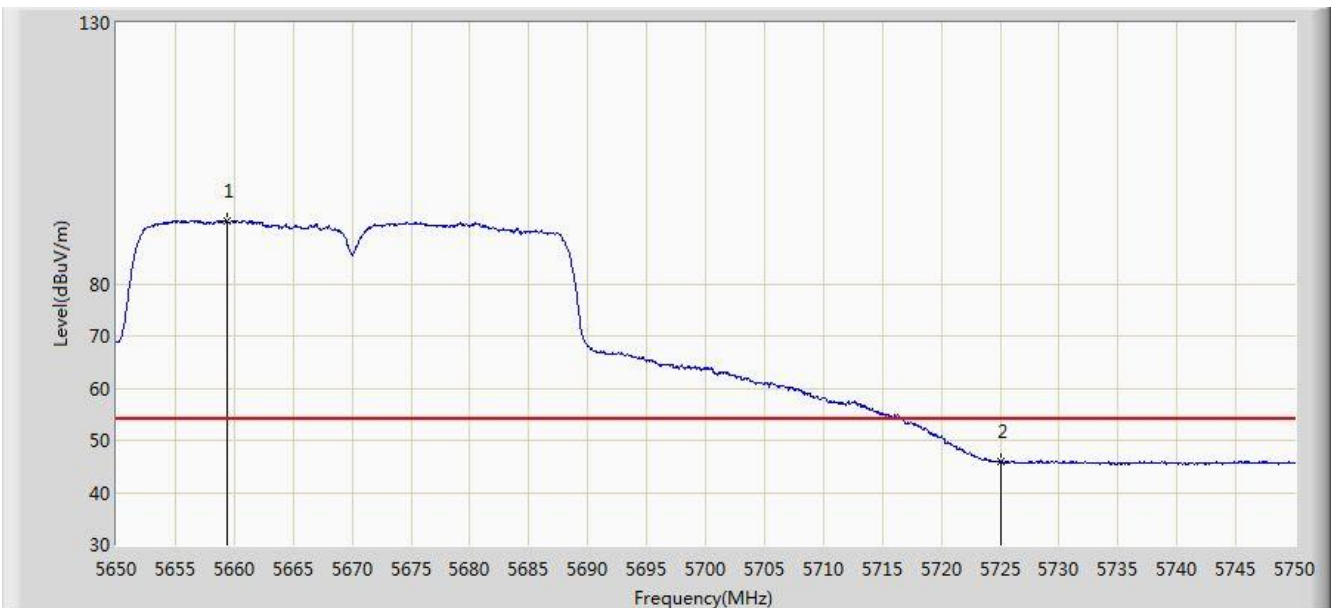


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5659.450	92.058	87.353	N/A	N/A	4.704	AV
2			5725.000	45.861	40.832	-8.139	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0 + 1	

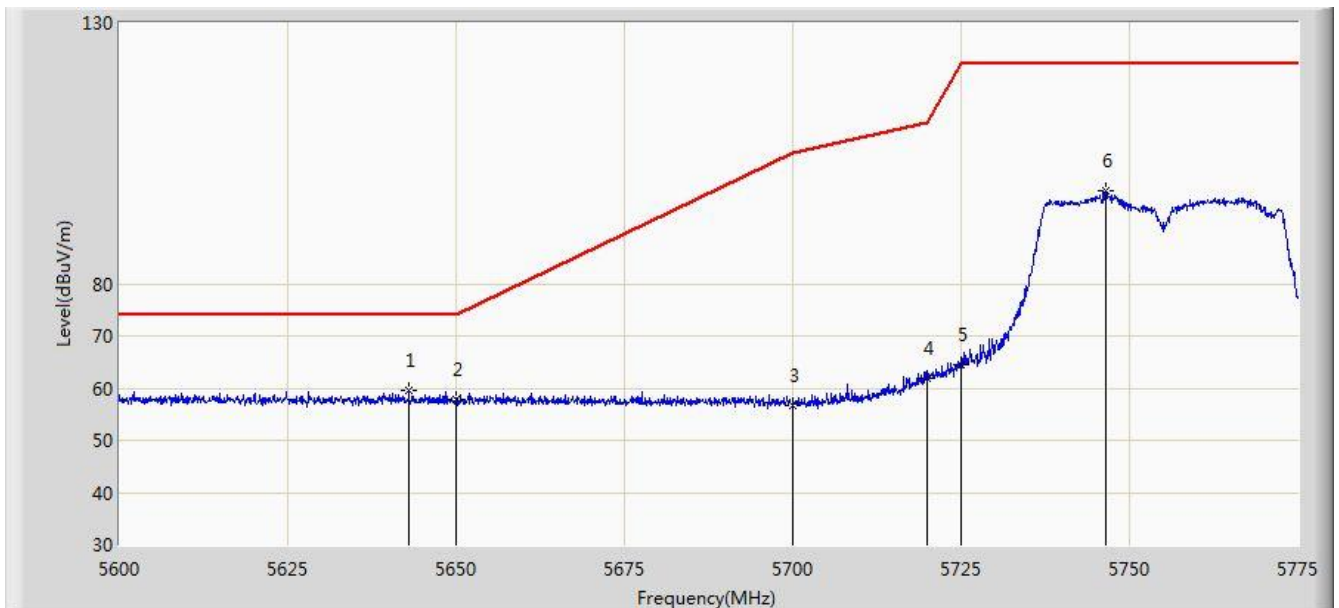


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.962	59.480	54.832	-8.720	68.200	4.648	PK
2			5650.000	57.769	53.098	-10.431	68.200	4.671	PK
3			5700.000	56.618	51.740	-48.582	105.200	4.878	PK
4			5720.000	61.763	56.766	-49.037	110.800	4.997	PK
5			5725.000	64.570	59.541	-57.630	122.200	5.029	PK
6			5746.388	97.951	92.788	N/A	N/A	5.163	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0 + 1	

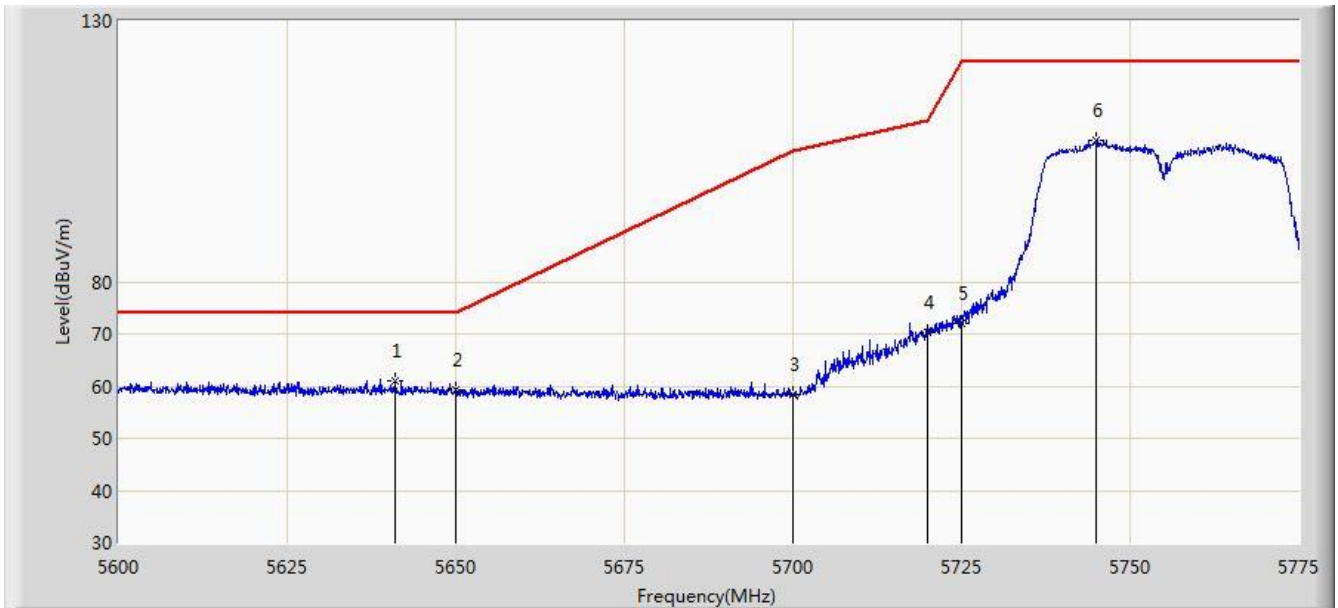


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.038	61.074	56.433	-7.126	68.200	4.641	PK
2			5650.000	59.380	54.709	-8.820	68.200	4.671	PK
3			5700.000	58.401	53.523	-46.799	105.200	4.878	PK
4			5720.000	70.423	65.426	-40.377	110.800	4.997	PK
5			5725.000	72.128	67.099	-50.072	122.200	5.029	PK
6			5744.987	106.970	101.815	N/A	N/A	5.154	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0 + 1	

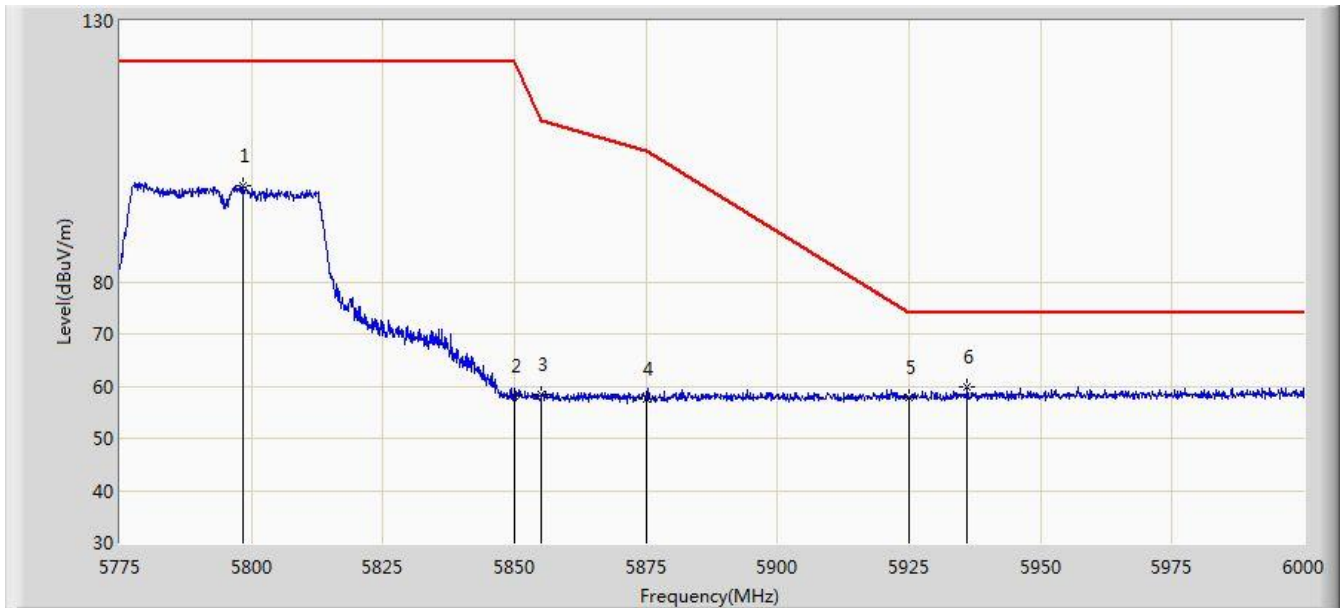


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5798.400	98.498	93.062	N/A	N/A	5.436	PK
2			5850.000	58.075	52.349	-64.125	122.200	5.726	PK
3			5855.000	58.275	52.529	-52.525	110.800	5.746	PK
4			5875.000	57.487	51.667	-47.713	105.200	5.820	PK
5			5925.000	57.747	51.781	-10.453	68.200	5.967	PK
6		*	5935.987	59.843	53.849	-8.357	68.200	5.993	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0 + 1	

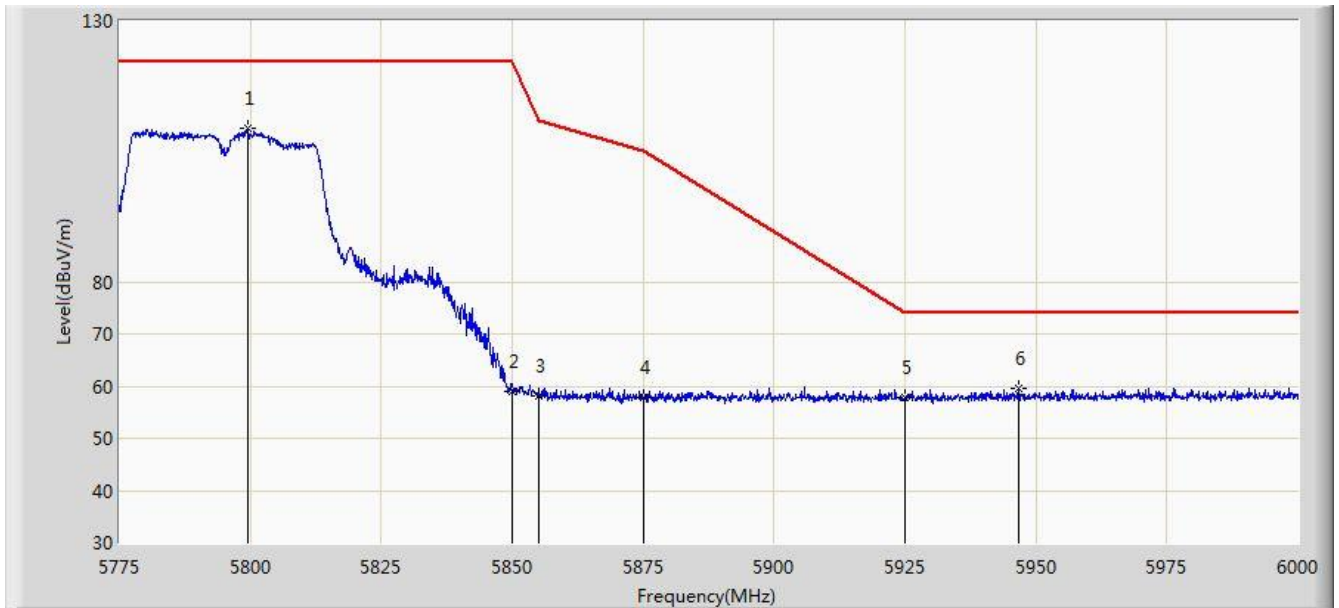


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5799.638	109.468	104.024	N/A	N/A	5.444	PK
2			5850.000	59.105	53.380	-63.095	122.200	5.725	PK
3			5855.000	58.129	52.383	-52.671	110.800	5.745	PK
4			5875.000	57.922	52.102	-47.278	105.200	5.820	PK
5			5925.000	57.907	51.976	-10.293	68.200	5.932	PK
6		*	5946.788	59.509	53.553	-8.691	68.200	5.956	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

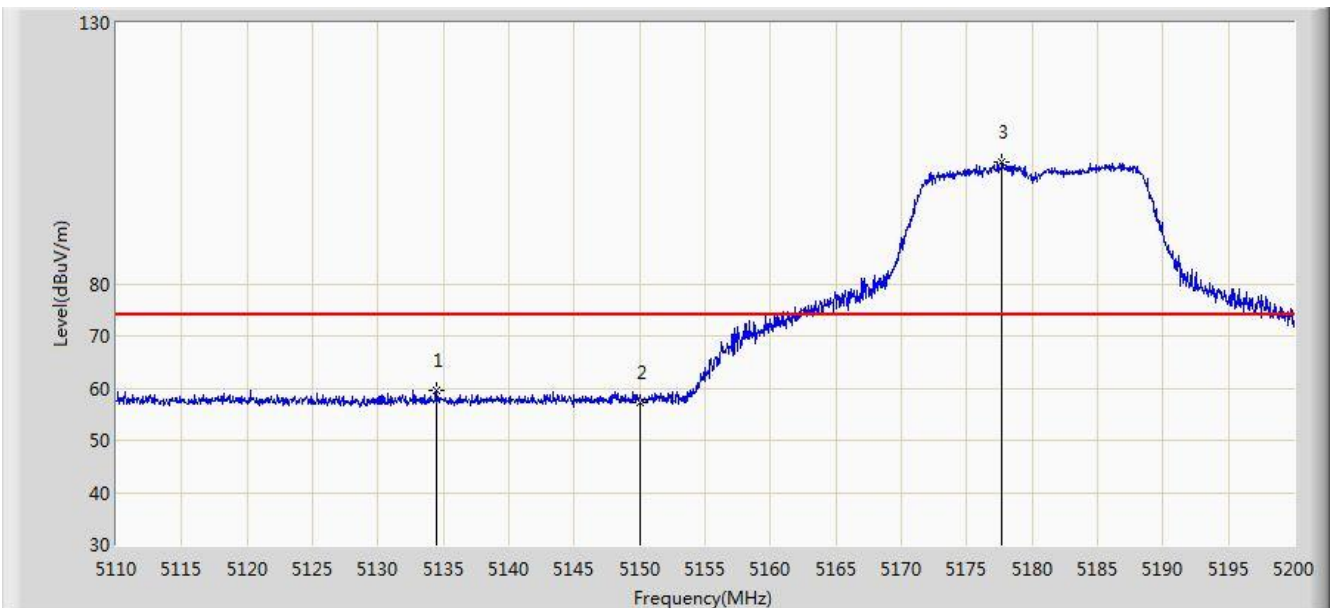


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.525	59.646	55.471	-14.354	74.000	4.175	PK
2			5150.000	57.232	53.063	-16.768	74.000	4.170	PK
3		*	5177.725	103.240	99.163	N/A	N/A	4.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

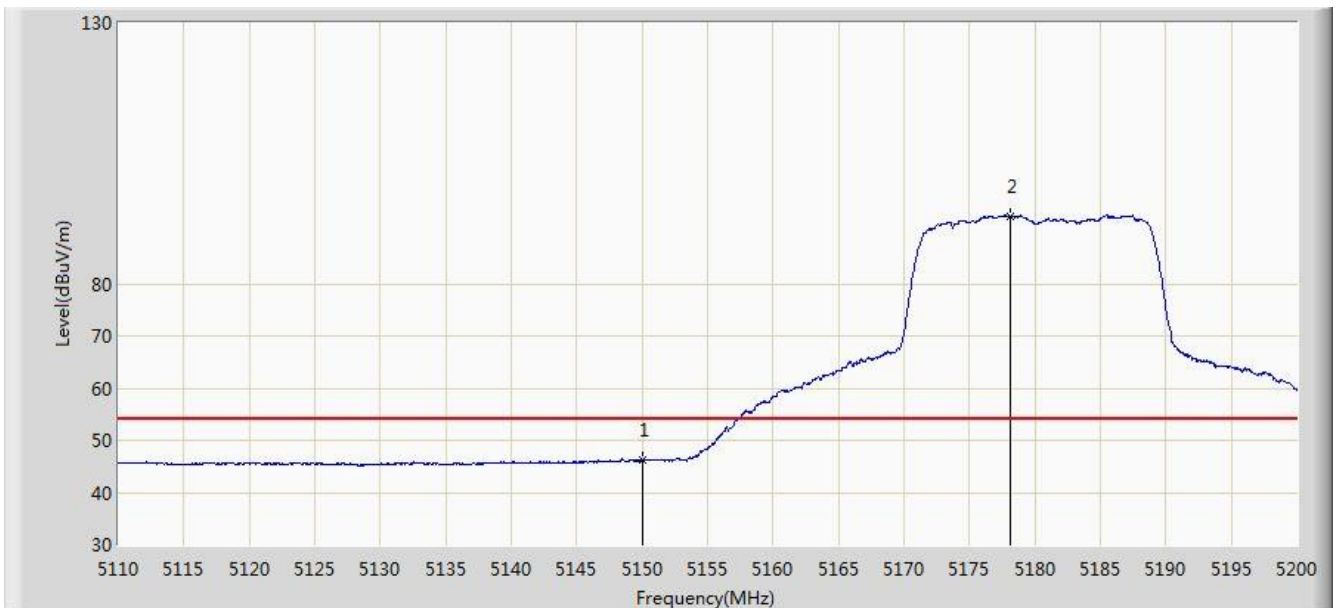


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.140	41.971	-7.860	54.000	4.170	AV
2		*	5178.175	92.933	88.858	N/A	N/A	4.075	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

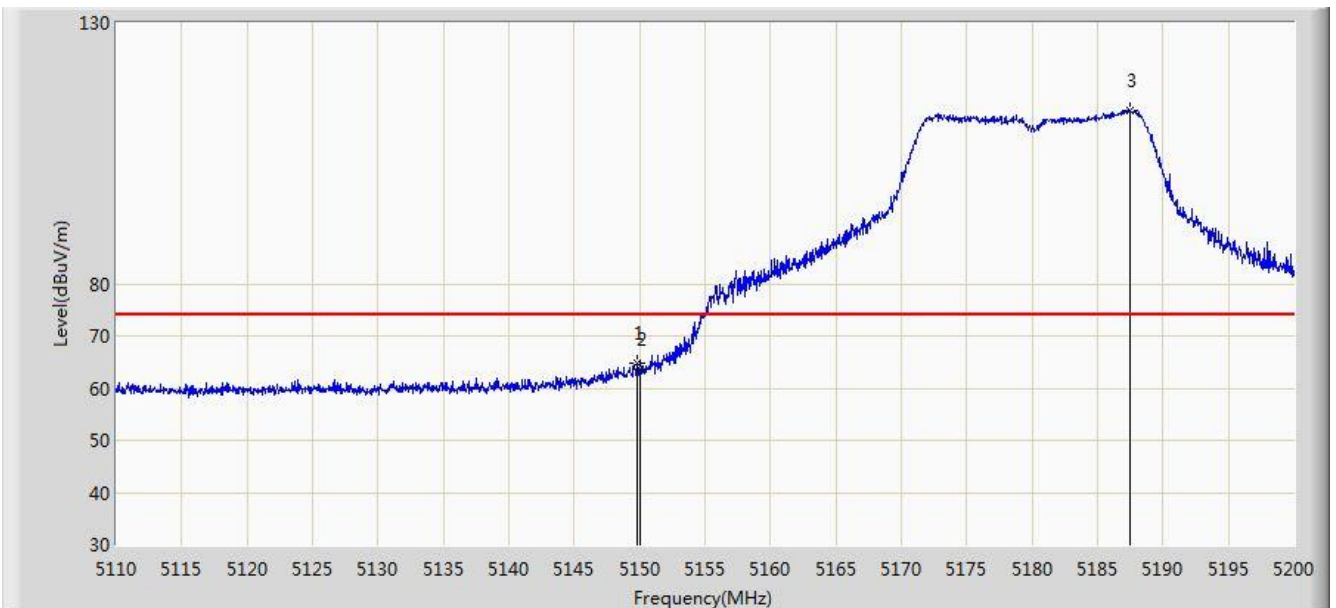


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.825	64.692	60.522	-9.308	74.000	4.170	PK
2			5150.000	63.645	59.476	-10.355	74.000	4.170	PK
3		*	5187.490	113.203	109.161	N/A	N/A	4.042	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

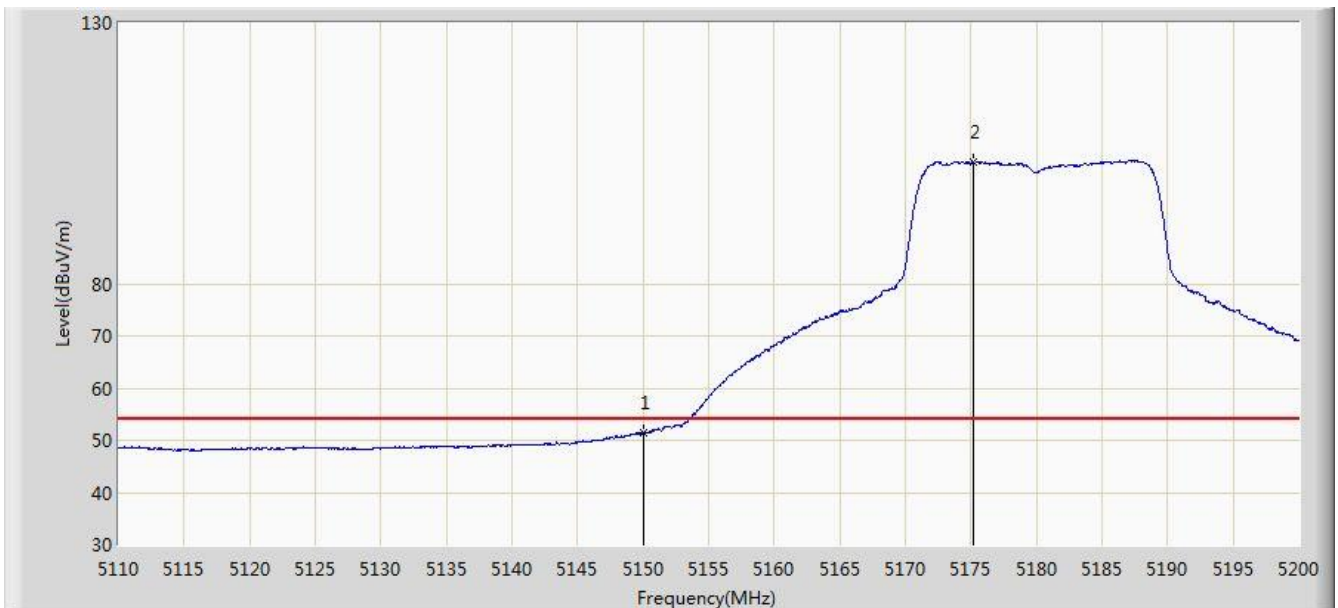


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.491	47.322	-2.509	54.000	4.170	AV
2		*	5175.160	103.226	99.140	N/A	N/A	4.086	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

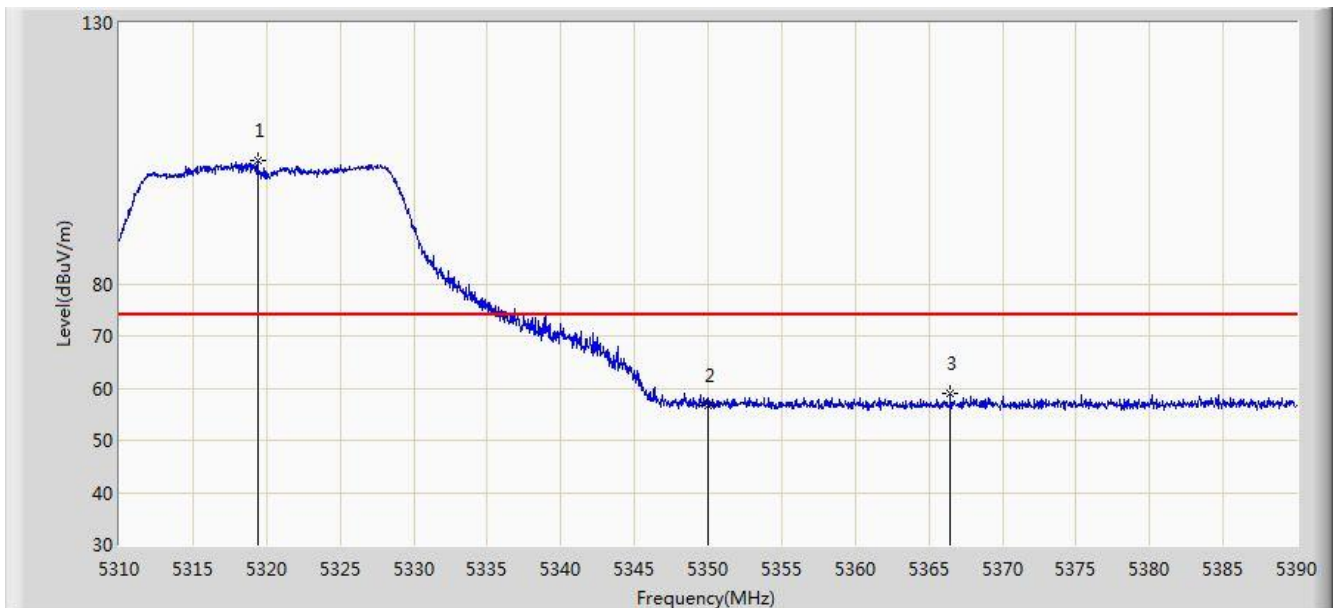


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.400	103.519	99.672	N/A	N/A	3.847	PK
2			5350.000	56.718	52.813	-17.282	74.000	3.904	PK
3			5366.480	58.888	54.954	-15.112	74.000	3.935	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

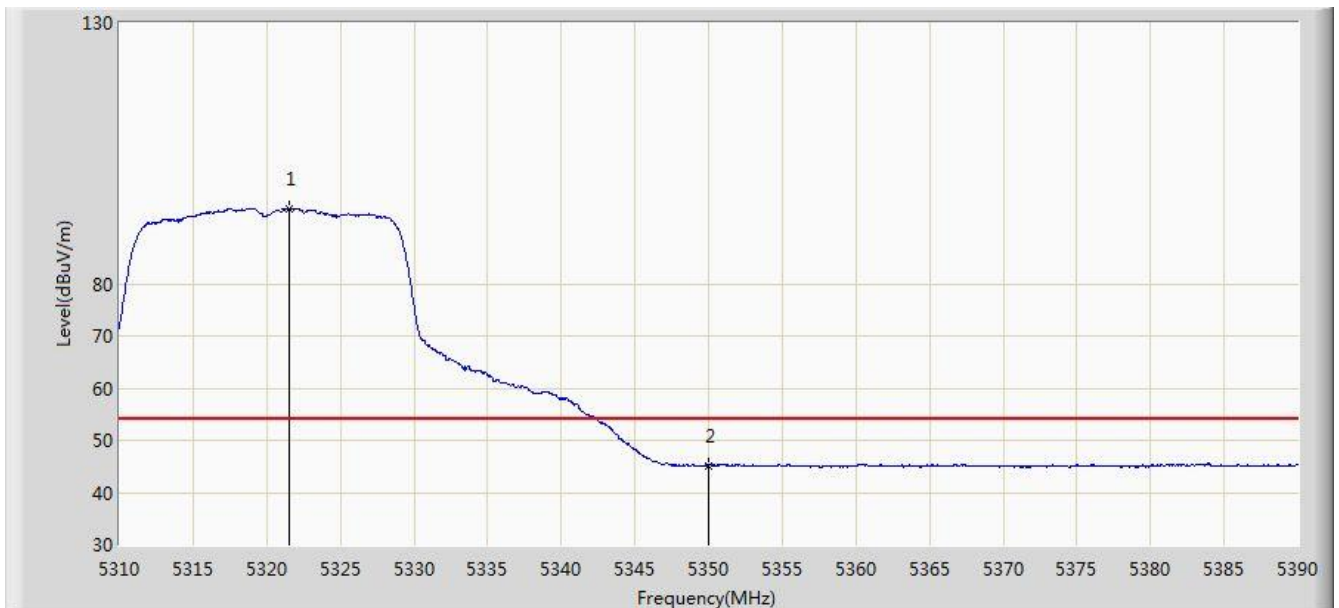


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.520	94.326	90.475	N/A	N/A	3.851	AV
2			5350.000	45.195	41.290	-8.805	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

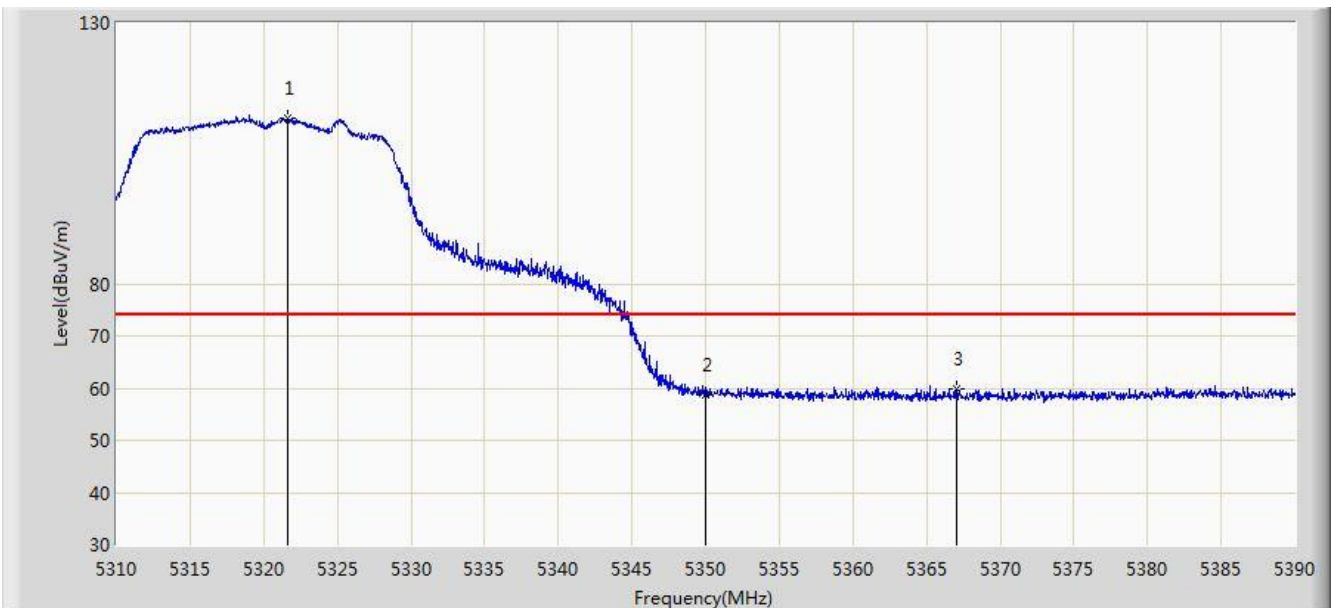


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.640	111.853	108.001	N/A	N/A	3.852	PK
2			5350.000	58.572	54.667	-15.428	74.000	3.904	PK
3			5367.000	59.973	56.038	-14.027	74.000	3.934	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

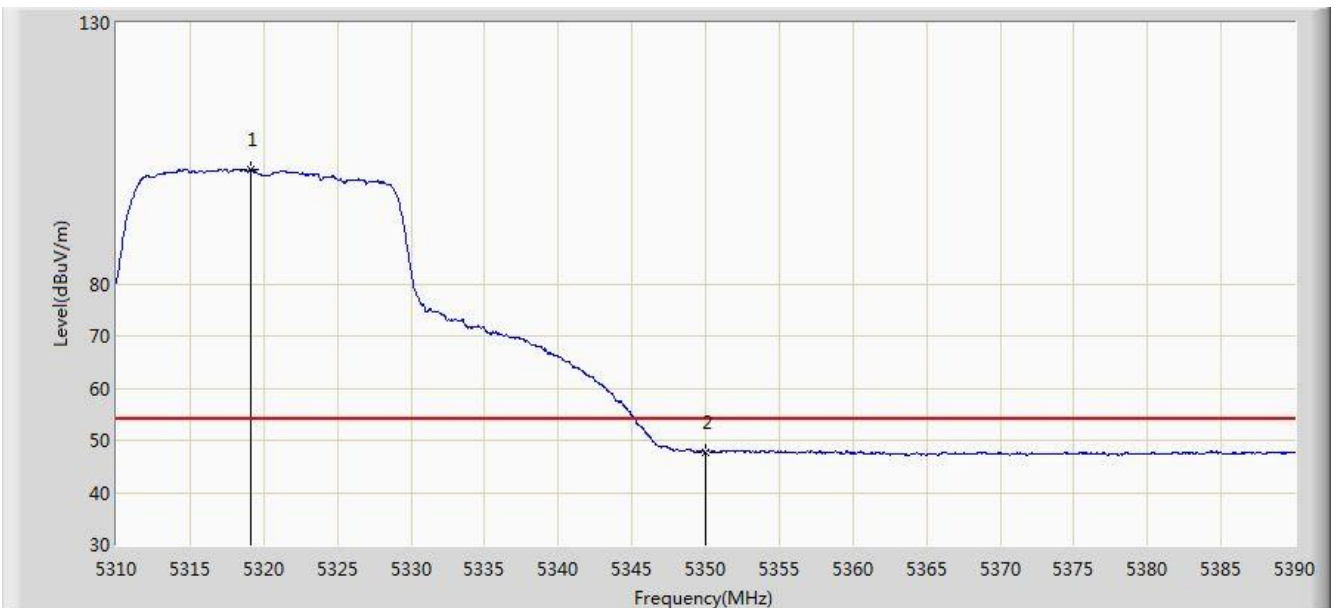


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.080	101.898	98.051	N/A	N/A	3.847	AV
2			5350.000	47.690	43.785	-6.310	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

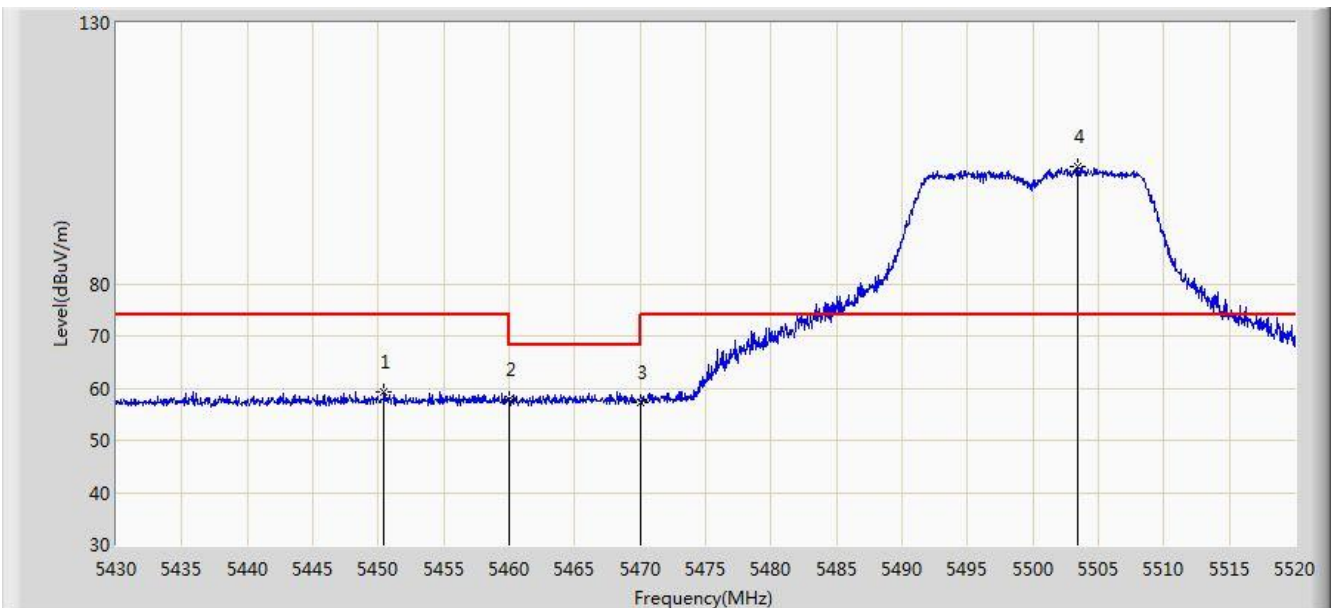


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.430	59.226	55.070	-14.774	74.000	4.157	PK
2			5460.000	57.833	53.653	-16.167	74.000	4.180	PK
3			5470.000	57.163	52.961	-11.037	68.200	4.202	PK
4		*	5503.440	102.384	98.102	N/A	N/A	4.281	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

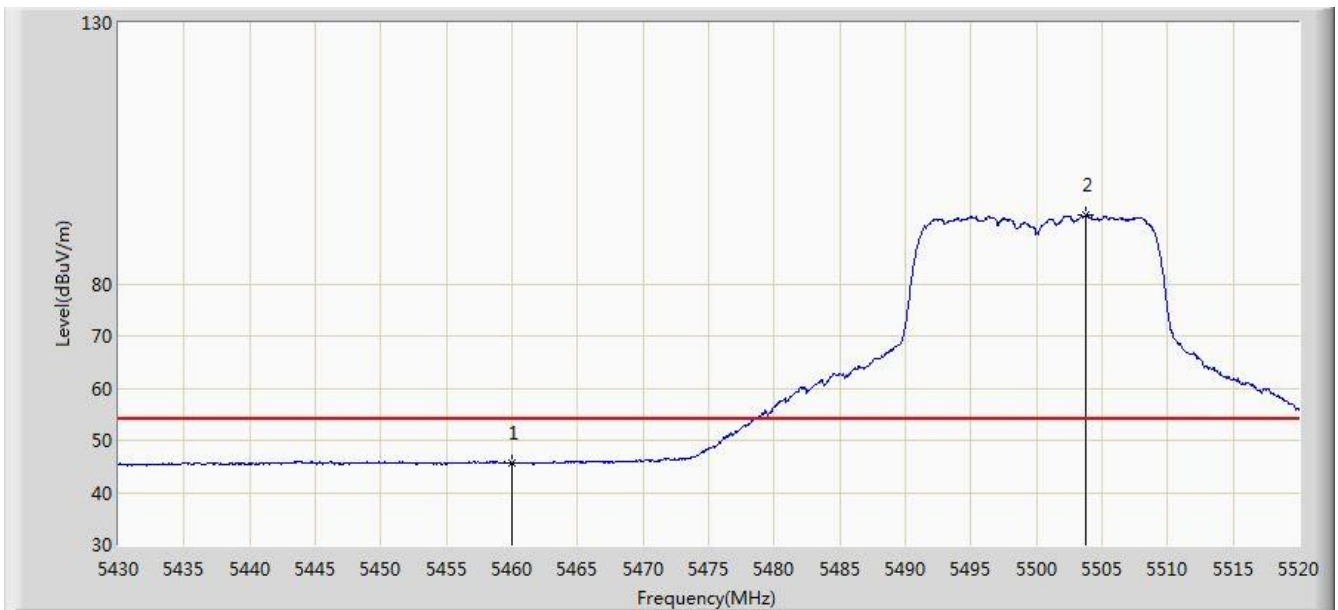


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.524	41.344	-8.476	54.000	4.180	AV
2		*	5503.755	93.223	88.940	N/A	N/A	4.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

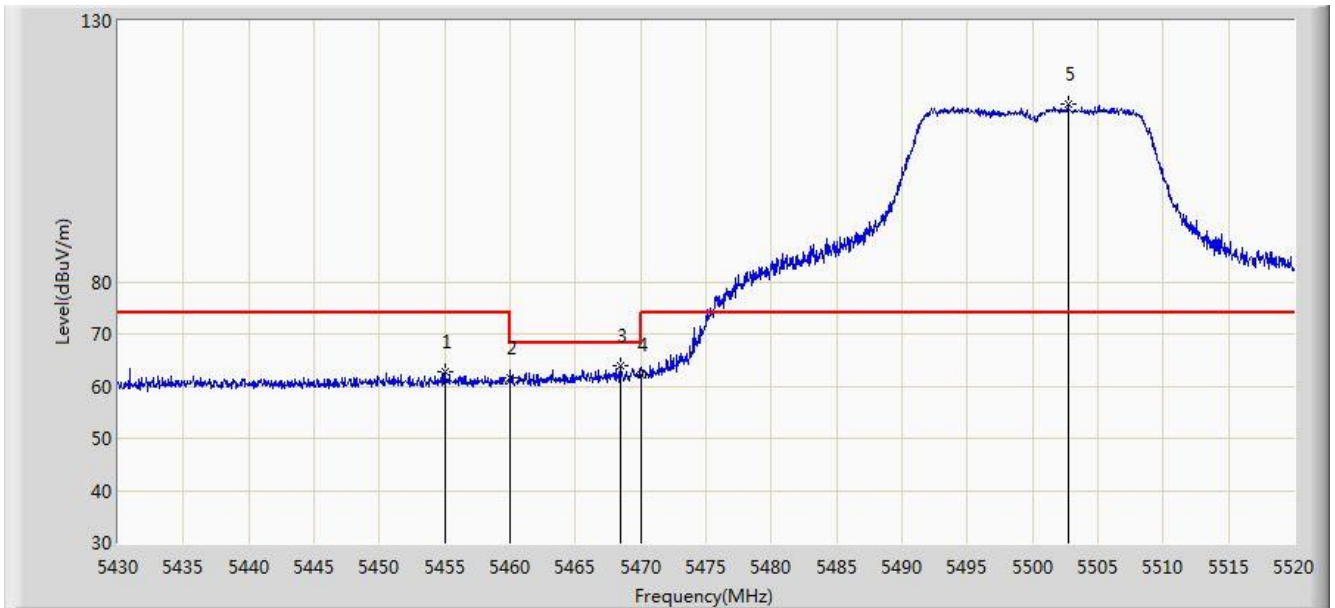


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.020	62.839	58.669	-11.161	74.000	4.170	PK
2			5460.000	61.651	57.471	-12.349	74.000	4.180	PK
3			5468.430	63.842	59.643	-4.358	68.200	4.198	PK
4			5470.000	62.047	57.845	-6.153	68.200	4.202	PK
5		*	5502.720	114.047	109.767	N/A	N/A	4.281	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

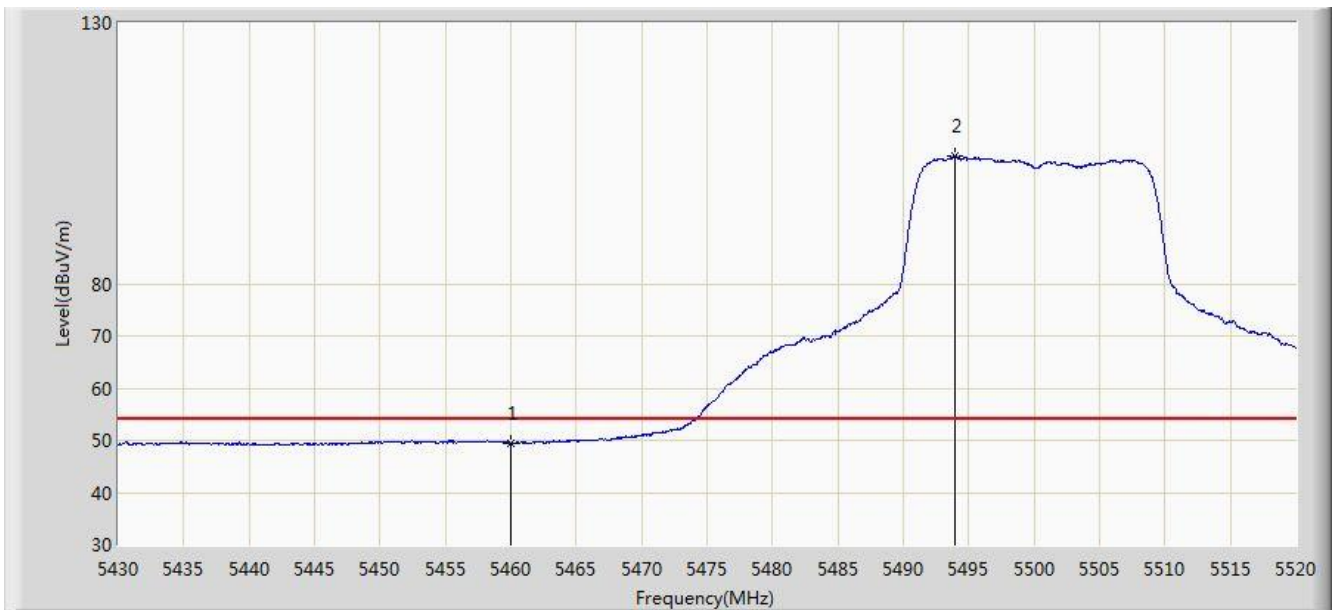


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.517	45.337	-4.483	54.000	4.180	AV
2		*	5493.900	104.417	100.160	N/A	N/A	4.257	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

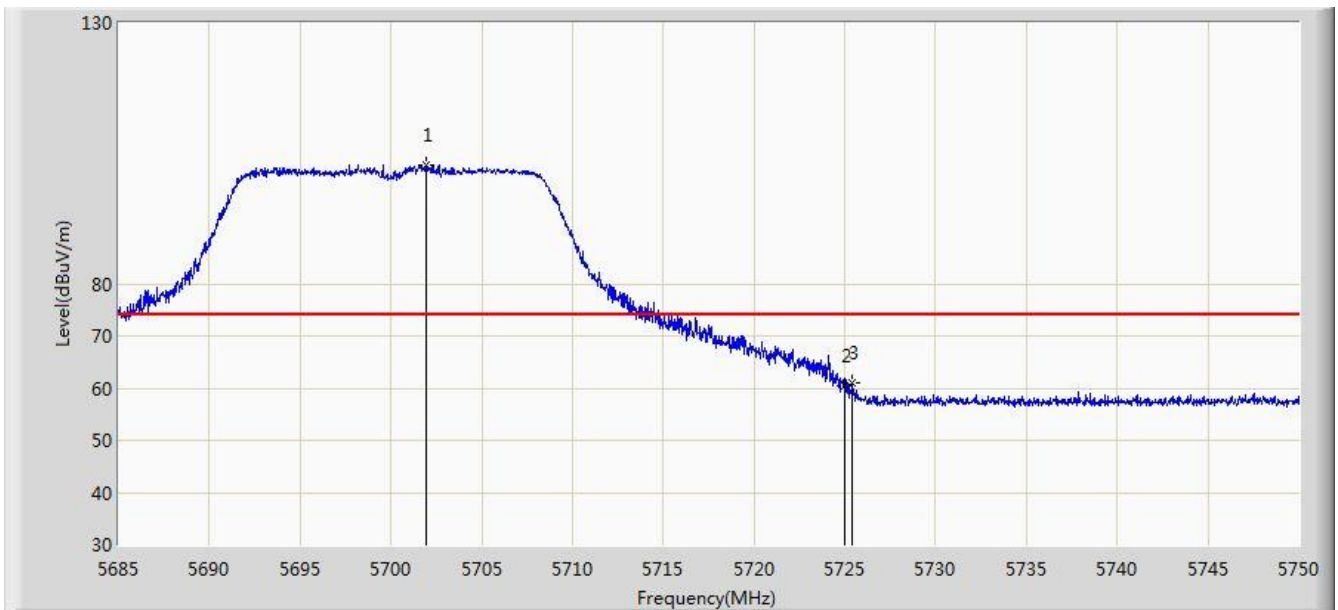


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.965	102.832	97.943	N/A	N/A	4.890	PK
2			5725.000	60.423	55.394	-13.577	74.000	5.029	PK
3			5725.397	60.946	55.914	-13.054	74.000	5.032	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

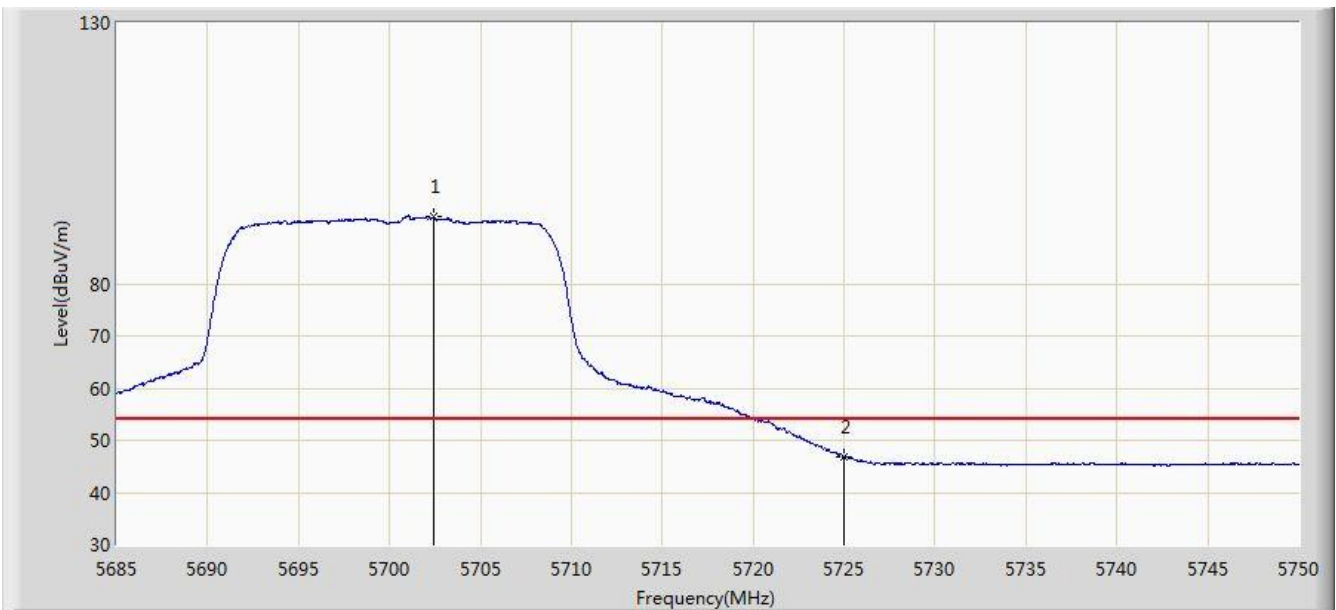


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.453	92.787	87.896	N/A	N/A	4.891	AV
2			5725.000	46.866	41.837	-7.134	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

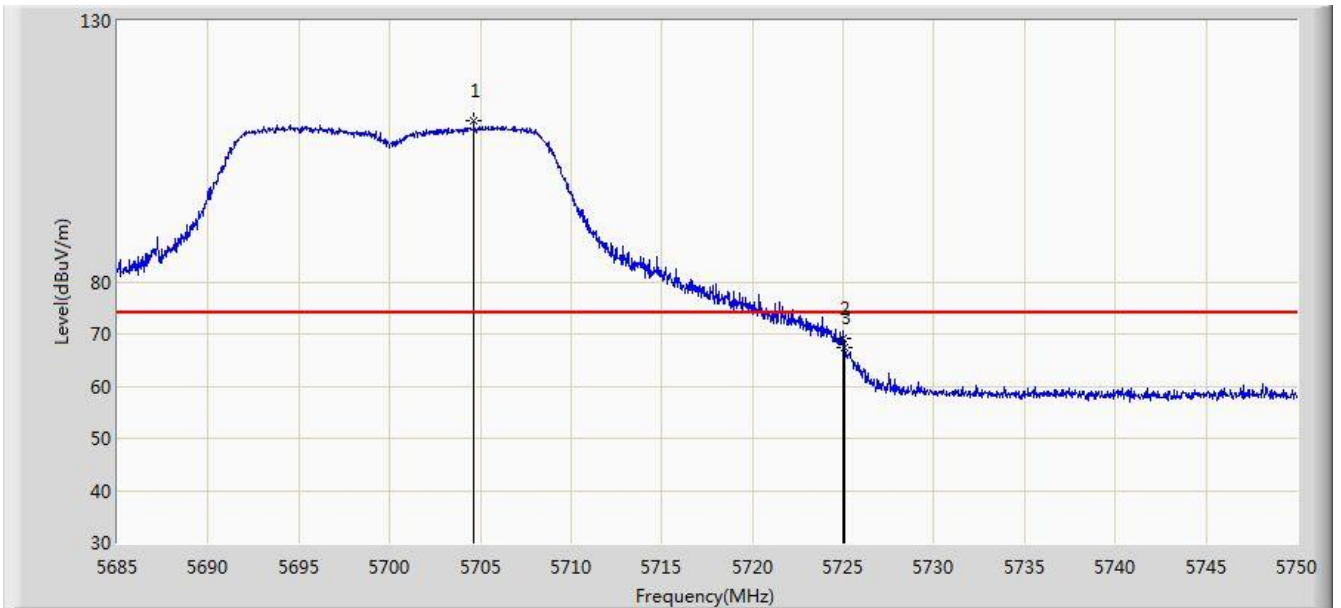


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.630	110.817	105.914	N/A	N/A	4.903	PK
2			5725.000	69.065	64.036	-4.935	74.000	5.029	PK
3			5725.105	67.312	62.282	-6.688	74.000	5.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

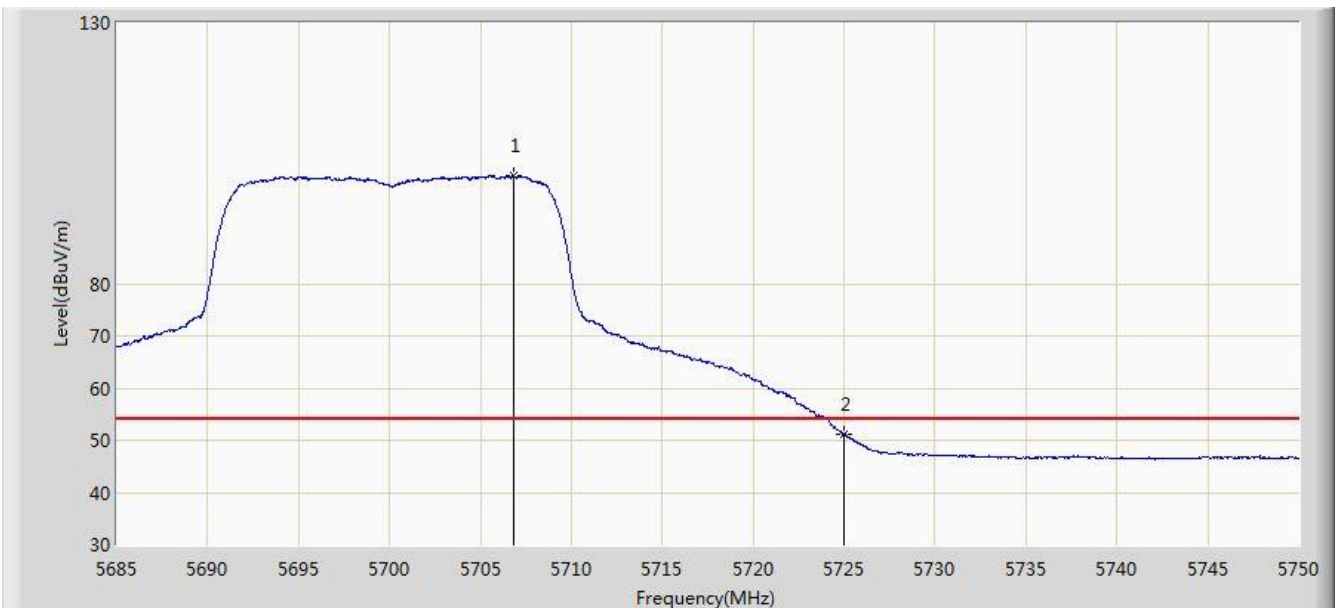


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.808	100.637	95.723	N/A	N/A	4.915	AV
2			5725.000	51.176	46.147	-2.824	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0 + 1	

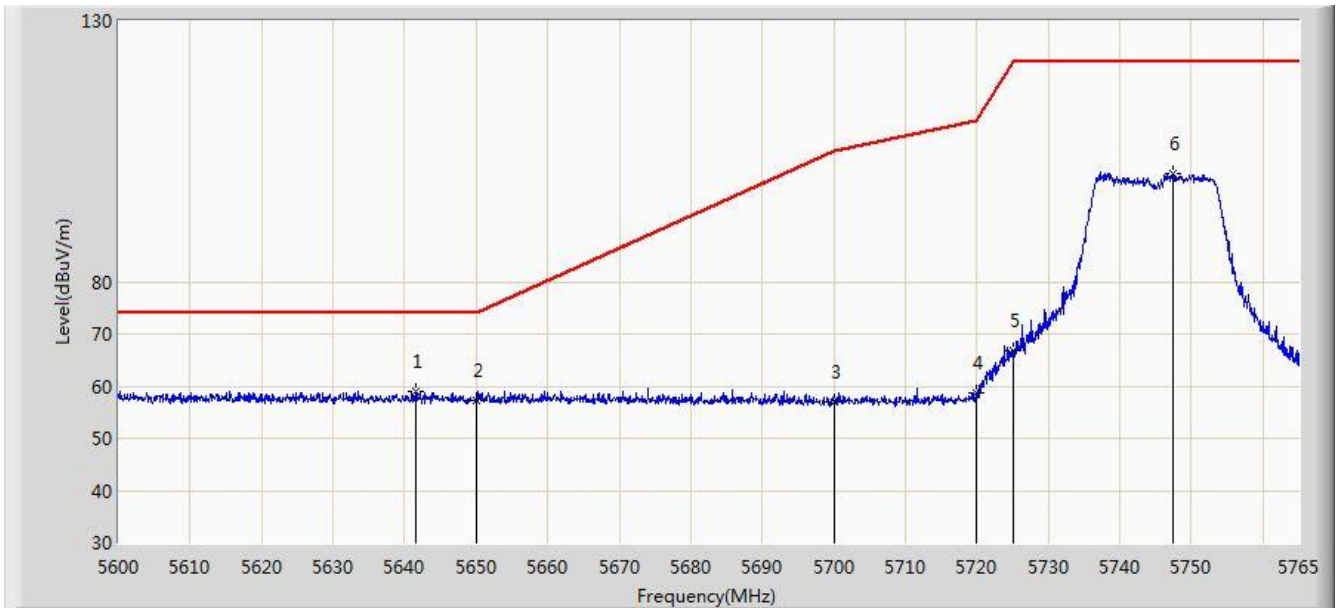


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.580	59.115	54.472	-9.085	68.200	4.643	PK
2			5650.000	57.327	52.656	-10.873	68.200	4.671	PK
3			5700.000	57.011	52.133	-48.189	105.200	4.878	PK
4			5720.000	58.754	53.757	-52.046	110.800	4.997	PK
5			5725.000	66.944	61.915	-55.256	122.200	5.029	PK
6			5747.345	100.690	95.522	N/A	N/A	5.168	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0 + 1	

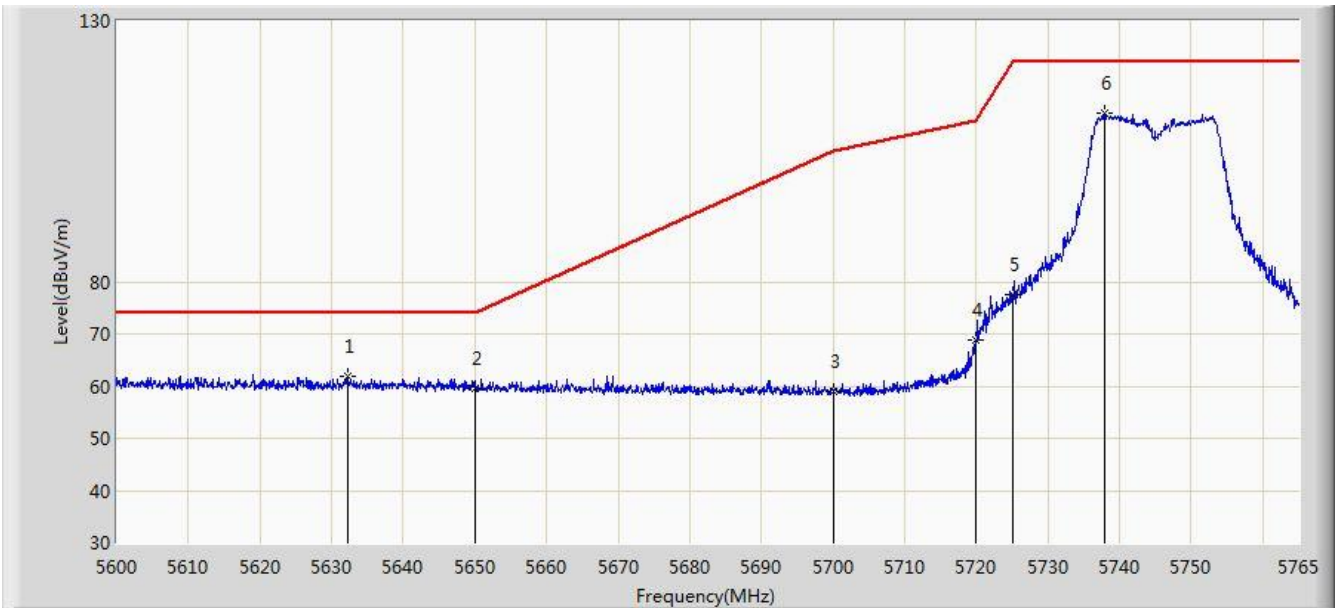


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.175	61.923	57.308	-6.277	68.200	4.615	PK
2			5650.000	59.667	54.996	-8.533	68.200	4.671	PK
3			5700.000	58.849	53.971	-46.351	105.200	4.878	PK
4			5720.000	68.709	63.712	-42.091	110.800	4.997	PK
5			5725.000	77.511	72.482	-44.689	122.200	5.029	PK
6			5737.940	112.285	107.174	N/A	N/A	5.112	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0 + 1	

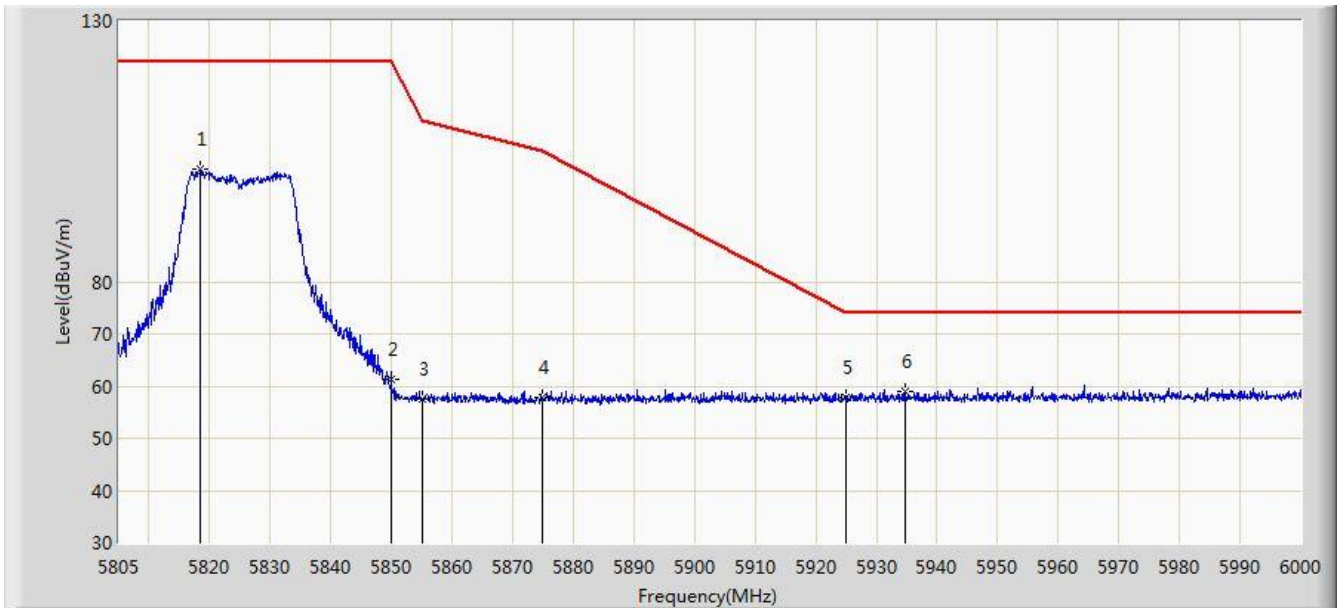


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5818.553	101.688	96.138	N/A	N/A	5.551	PK
2			5850.000	61.163	55.437	-61.037	122.200	5.726	PK
3			5855.000	57.421	51.675	-53.379	110.800	5.746	PK
4			5875.000	57.702	51.882	-47.498	105.200	5.820	PK
5			5925.000	57.937	51.971	-10.263	68.200	5.967	PK
6		*	5934.870	59.080	53.089	-9.120	68.200	5.991	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0 + 1	

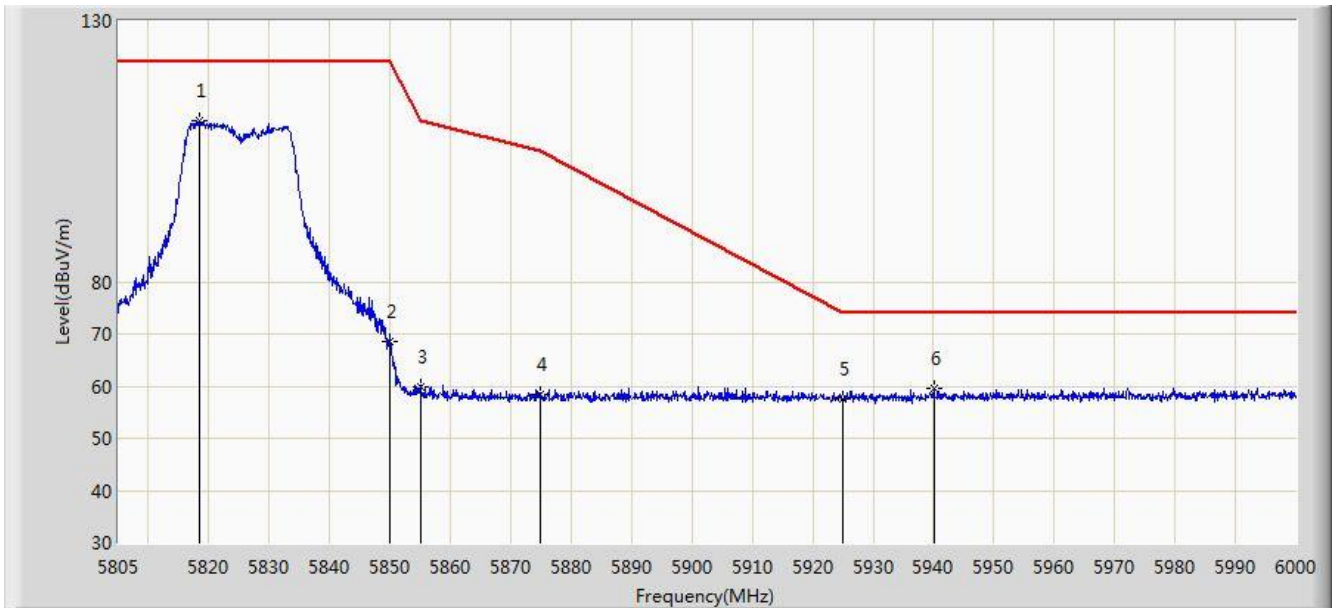


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5818.553	110.874	105.324	N/A	N/A	5.551	PK
2			5850.000	68.441	62.715	-53.759	122.200	5.726	PK
3			5855.000	59.943	54.197	-50.857	110.800	5.746	PK
4			5875.000	58.498	52.678	-46.702	105.200	5.820	PK
5			5925.000	57.530	51.564	-10.670	68.200	5.967	PK
6		*	5940.038	59.671	53.667	-8.529	68.200	6.004	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

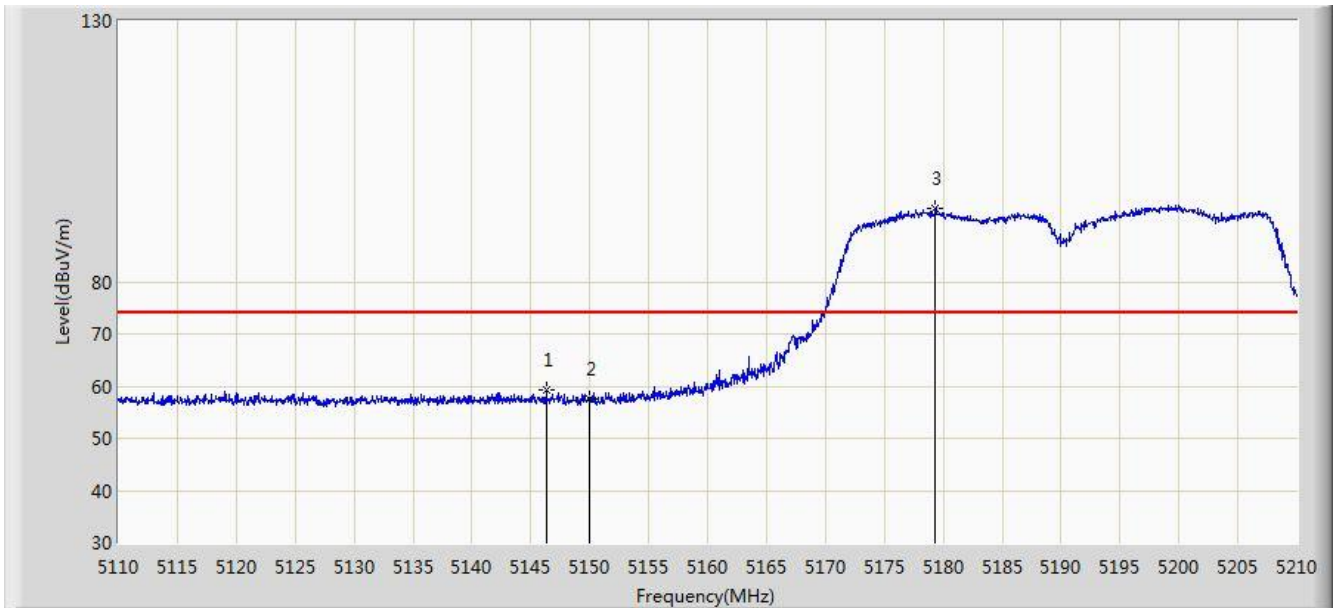


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.300	59.252	55.076	-14.748	74.000	4.176	PK
2			5150.000	57.415	53.246	-16.585	74.000	4.170	PK
3		*	5179.350	93.916	89.845	N/A	N/A	4.071	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

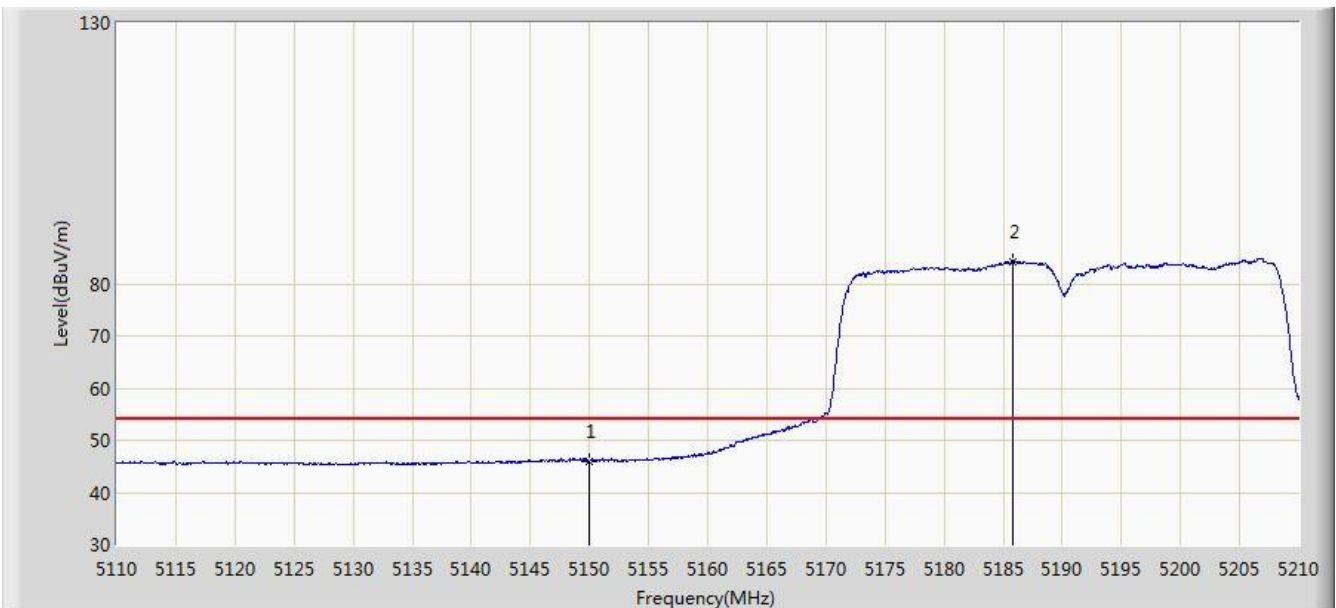


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.986	41.817	-8.014	54.000	4.170	AV
2		*	5185.850	84.328	80.280	N/A	N/A	4.049	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

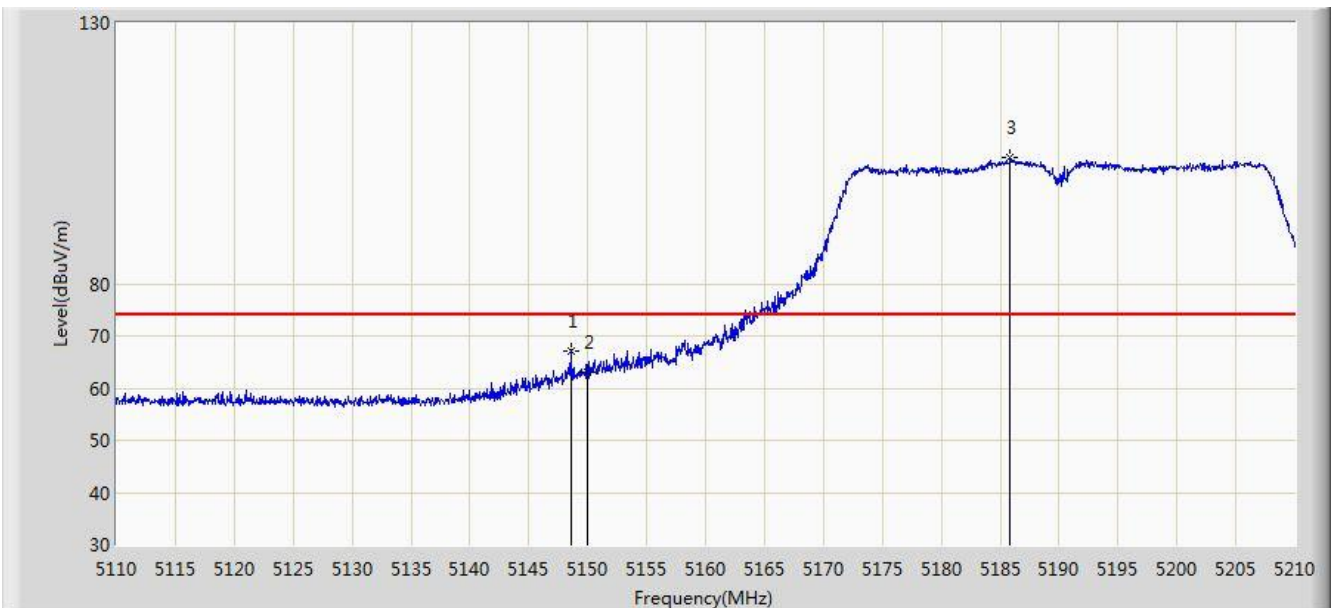


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.550	67.230	63.056	-6.770	74.000	4.173	PK
2			5150.000	62.962	58.793	-11.038	74.000	4.170	PK
3		*	5185.850	104.093	100.045	N/A	N/A	4.049	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

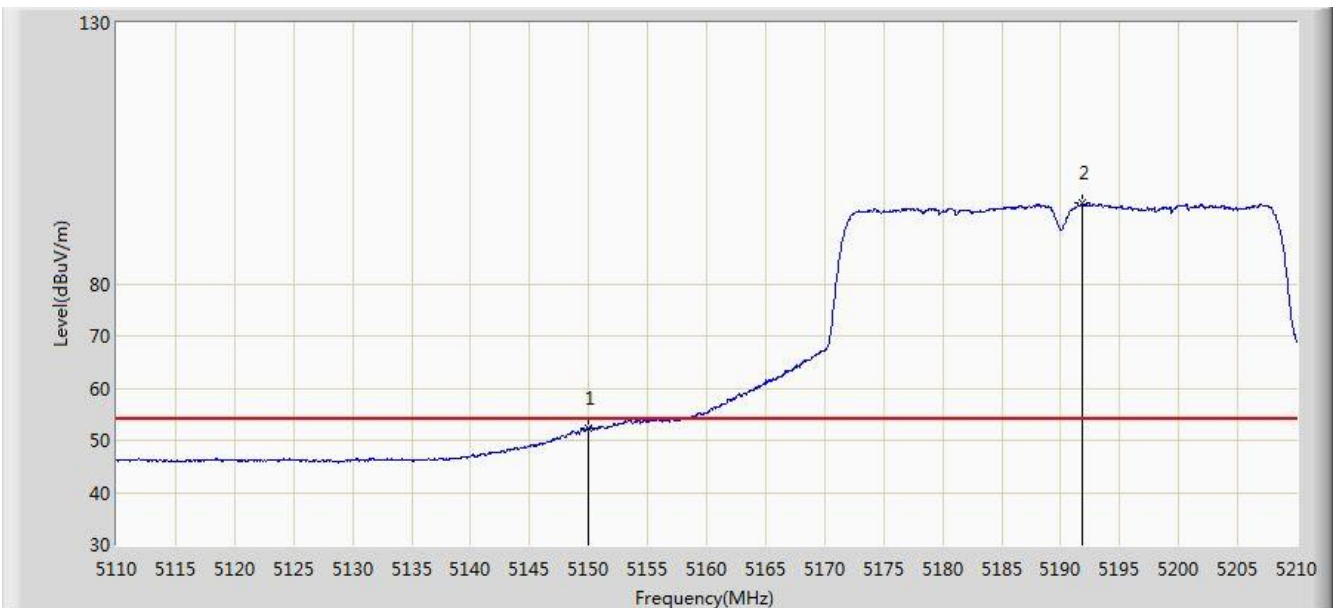


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.186	48.017	-1.814	54.000	4.170	AV
2		*	5191.800	95.378	91.351	N/A	N/A	4.027	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

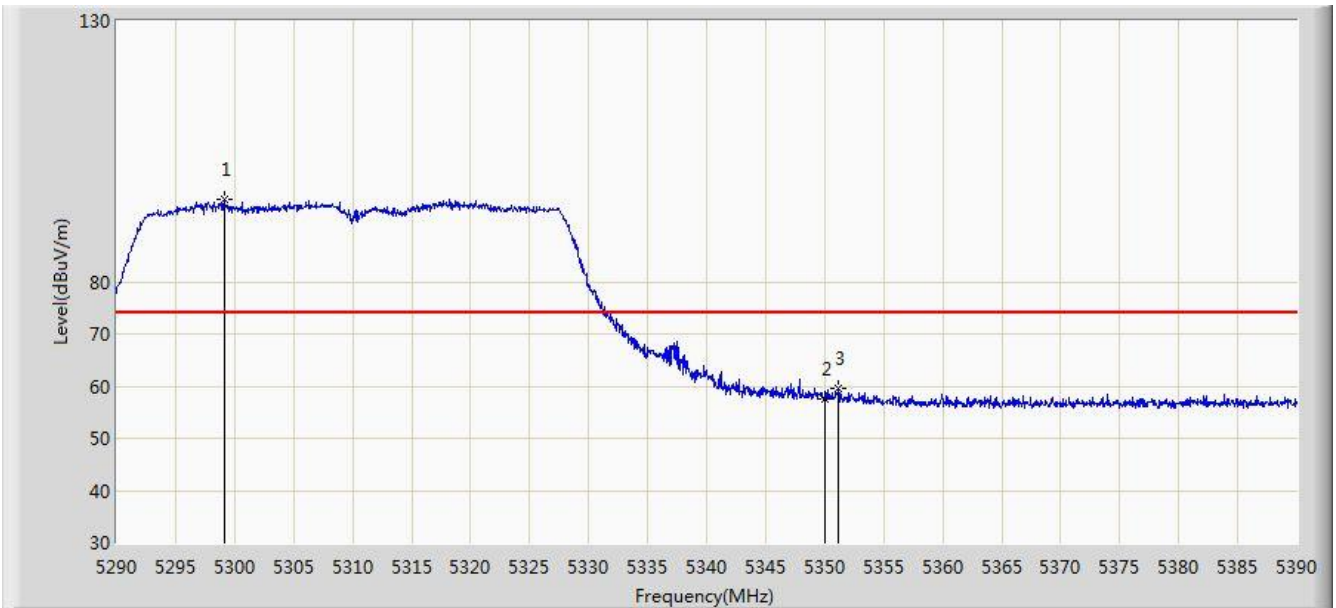


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.150	95.667	91.853	N/A	N/A	3.814	PK
2			5350.000	57.535	53.630	-16.465	74.000	3.904	PK
3			5351.200	59.443	55.536	-14.557	74.000	3.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

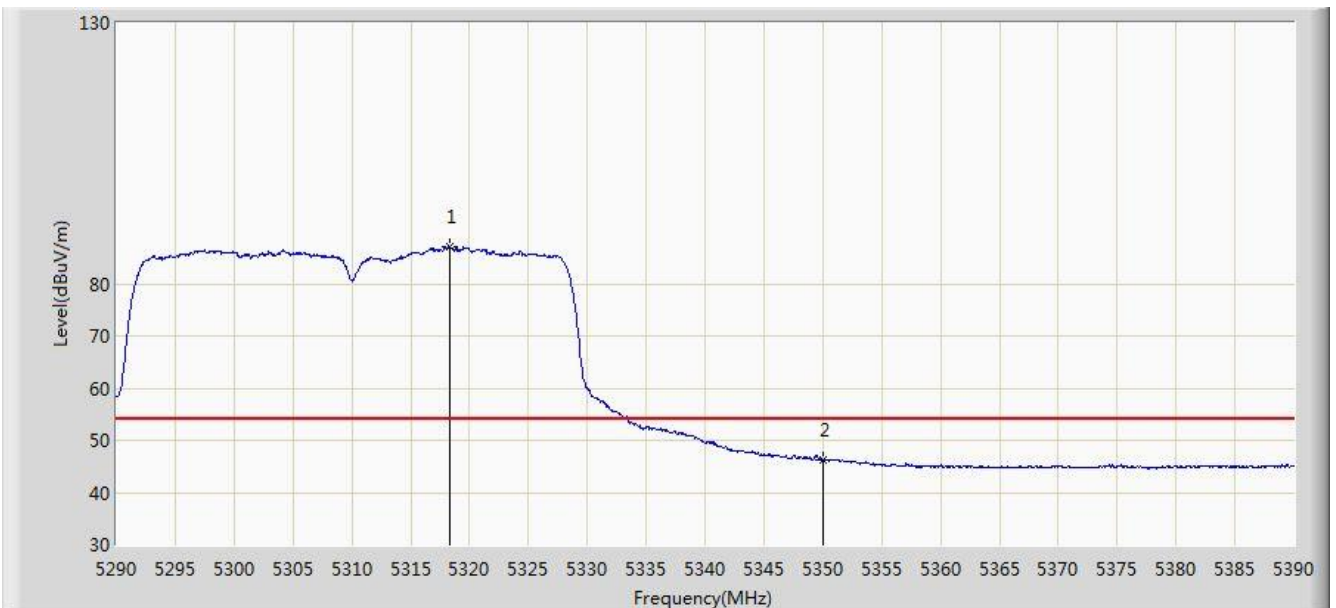


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.350	87.041	83.196	N/A	N/A	3.845	AV
2			5350.000	46.105	42.200	-7.895	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

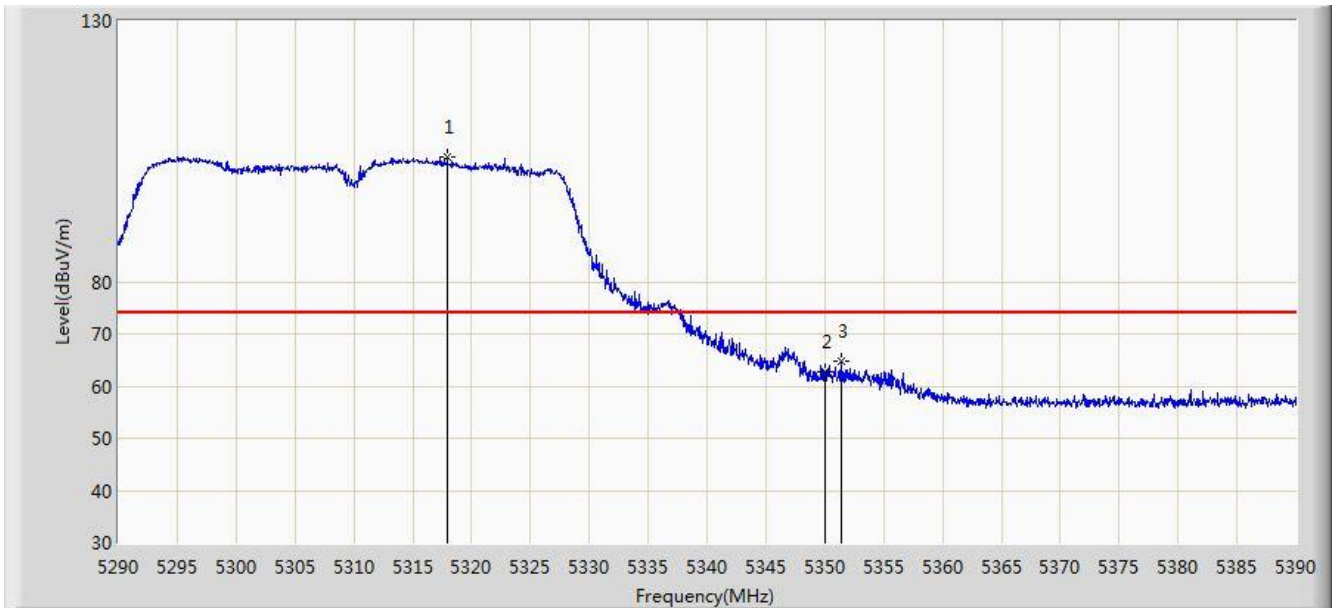


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.950	103.981	100.136	N/A	N/A	3.845	PK
2			5350.000	62.664	58.759	-11.336	74.000	3.904	PK
3			5351.350	64.728	60.821	-9.272	74.000	3.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

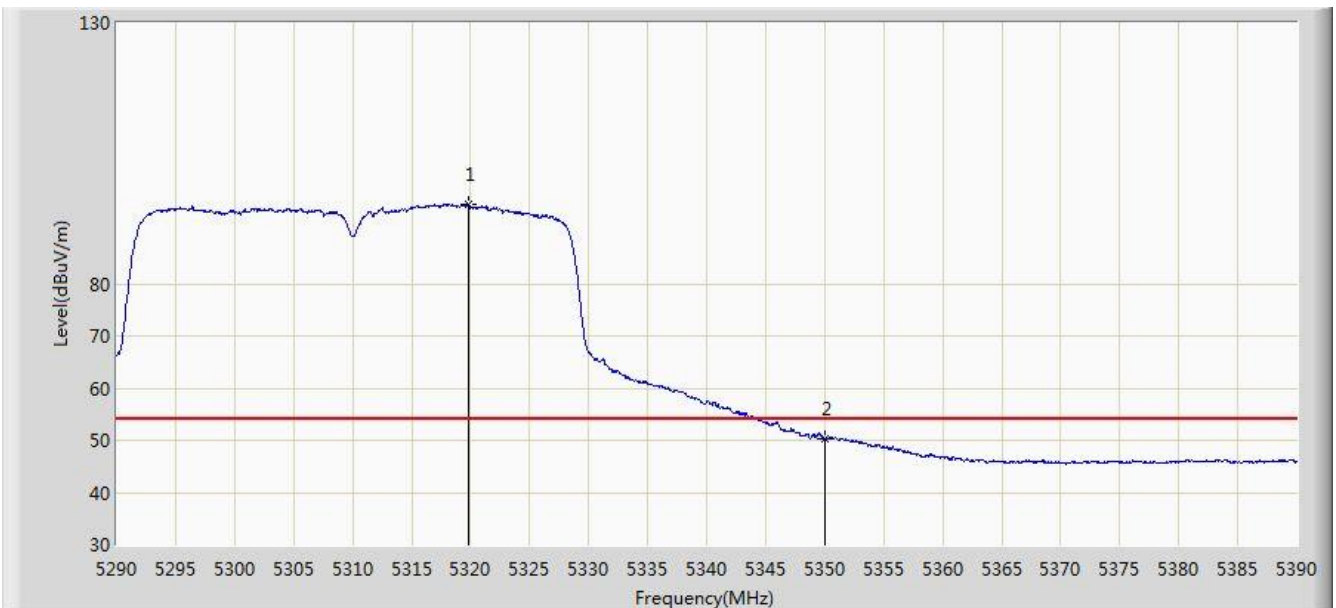


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.800	95.110	91.262	N/A	N/A	3.848	AV
2			5350.000	50.171	46.266	-3.829	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

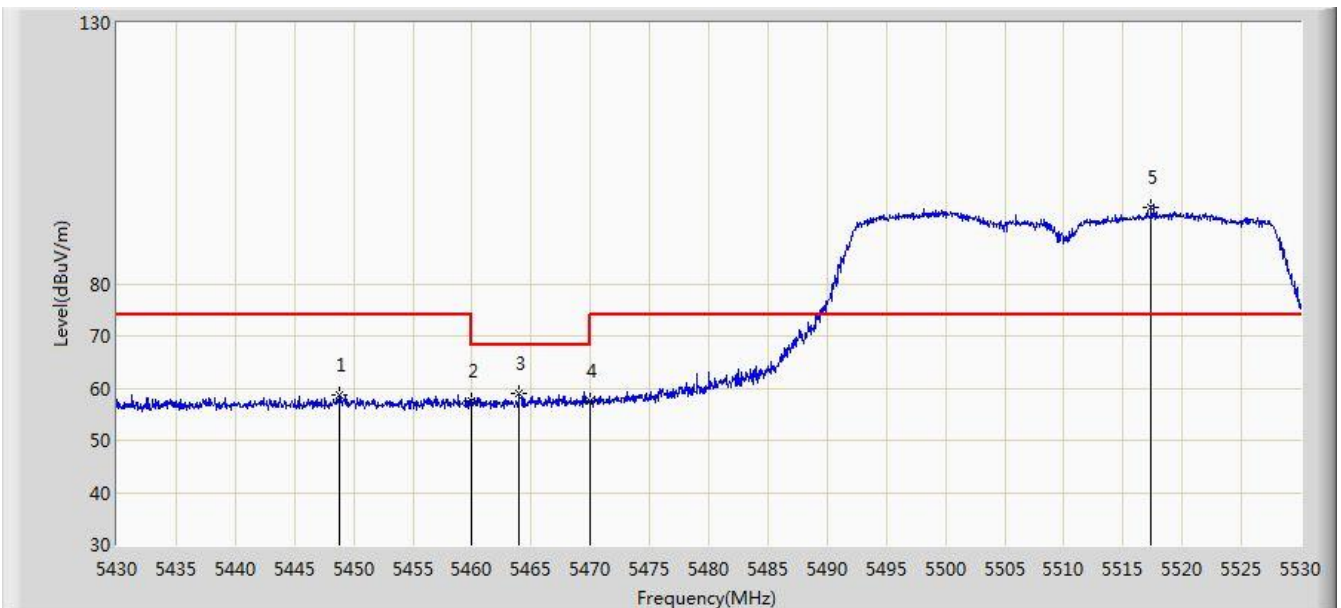


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.750	58.732	54.581	-15.268	74.000	4.151	PK
2			5460.000	57.681	53.501	-16.319	74.000	4.180	PK
3			5463.950	59.089	54.900	-9.111	68.200	4.189	PK
4			5470.000	57.620	53.418	-10.580	68.200	4.202	PK
5		*	5517.400	94.781	90.458	N/A	N/A	4.323	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

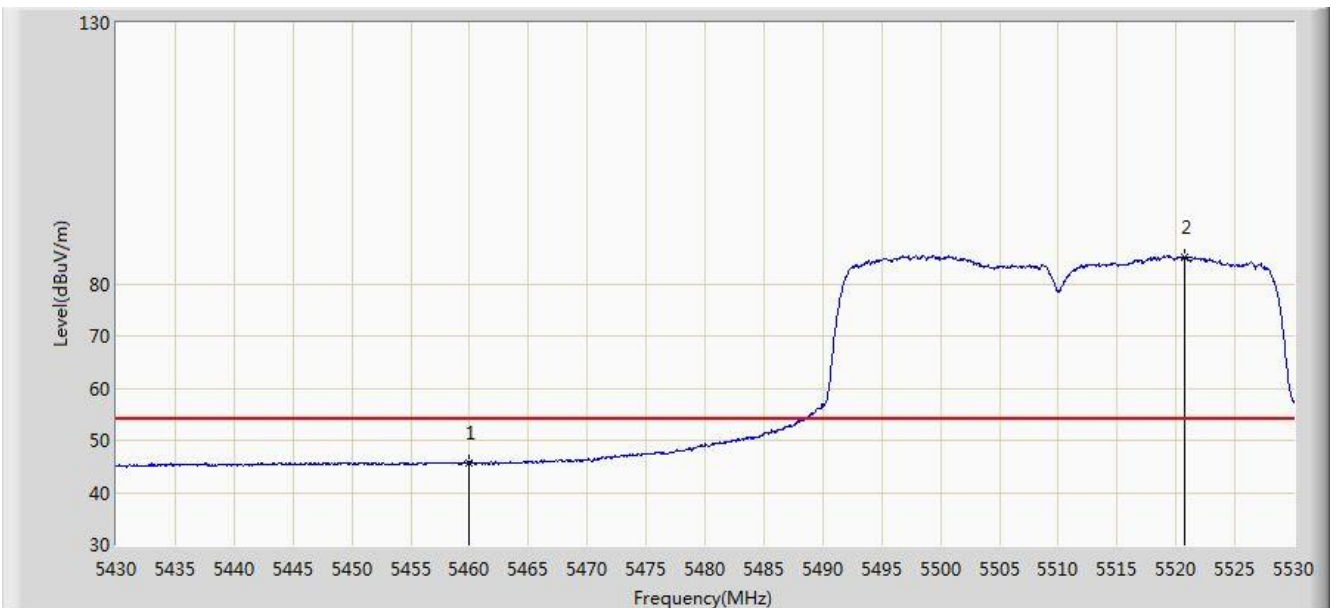


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.721	41.541	-8.279	54.000	4.180	AV
2		*	5520.750	85.153	80.820	N/A	N/A	4.334	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

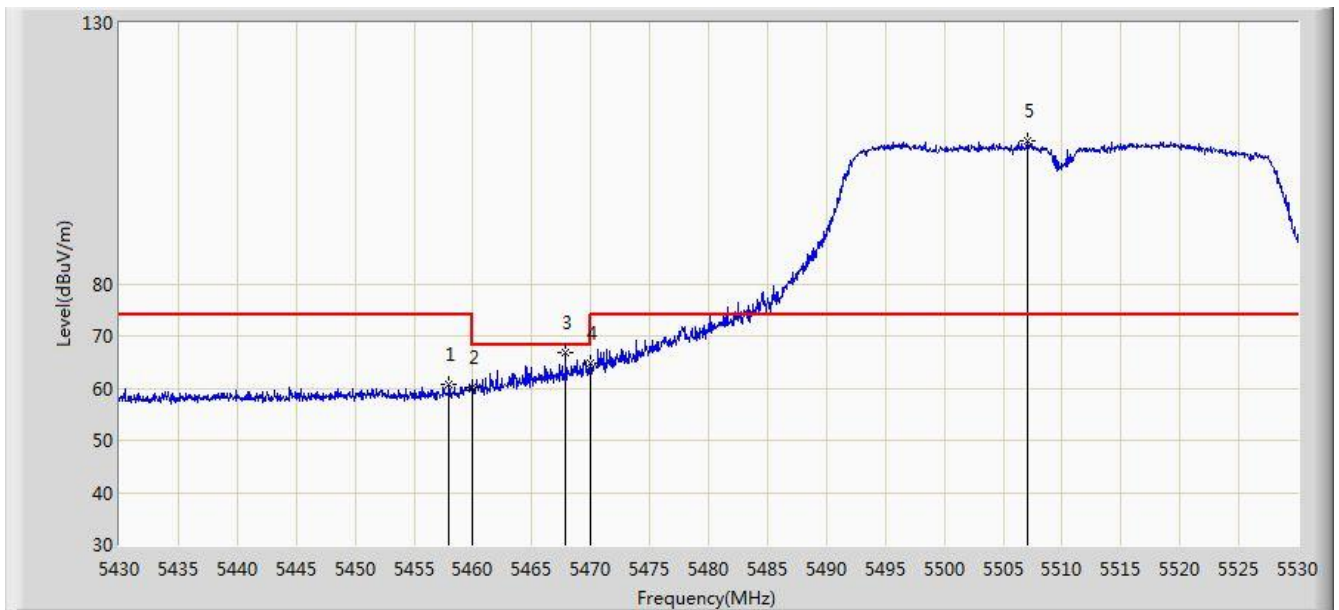


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.000	60.580	56.404	-13.420	74.000	4.176	PK
2			5460.000	60.010	55.830	-13.990	74.000	4.180	PK
3			5467.900	66.752	62.554	-1.448	68.200	4.198	PK
4			5470.000	64.649	60.447	-3.551	68.200	4.202	PK
5		*	5507.050	107.370	103.077	N/A	N/A	4.292	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

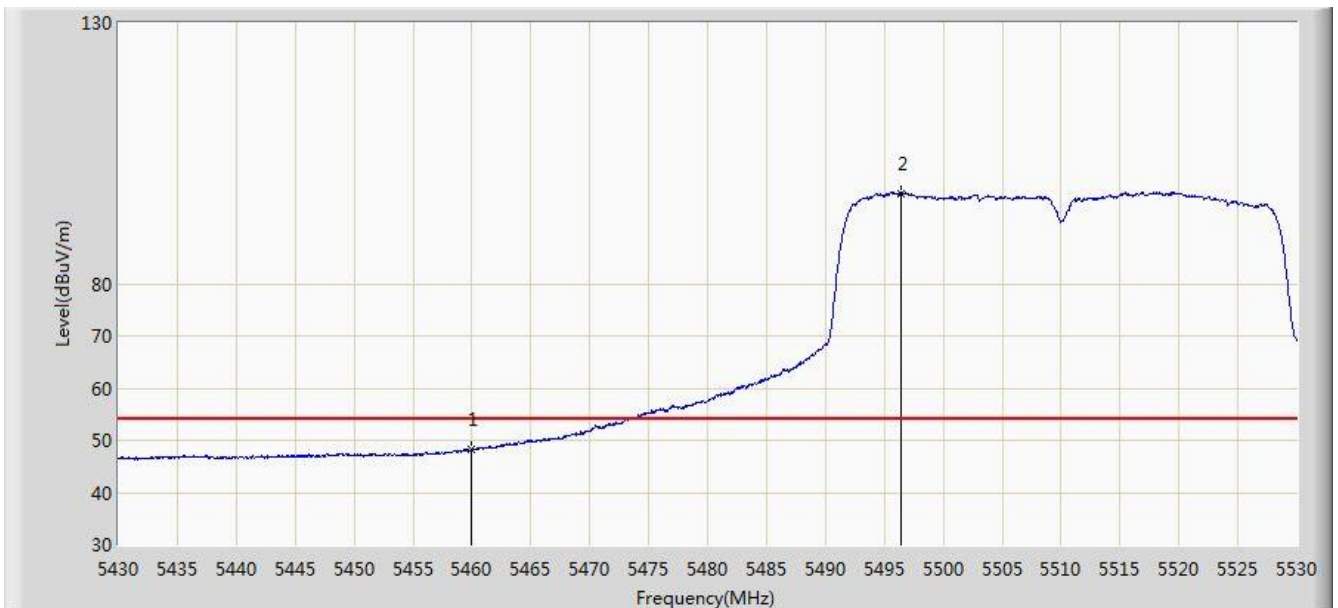


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.181	44.001	-5.819	54.000	4.180	AV
2		*	5496.400	97.336	93.074	N/A	N/A	4.262	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

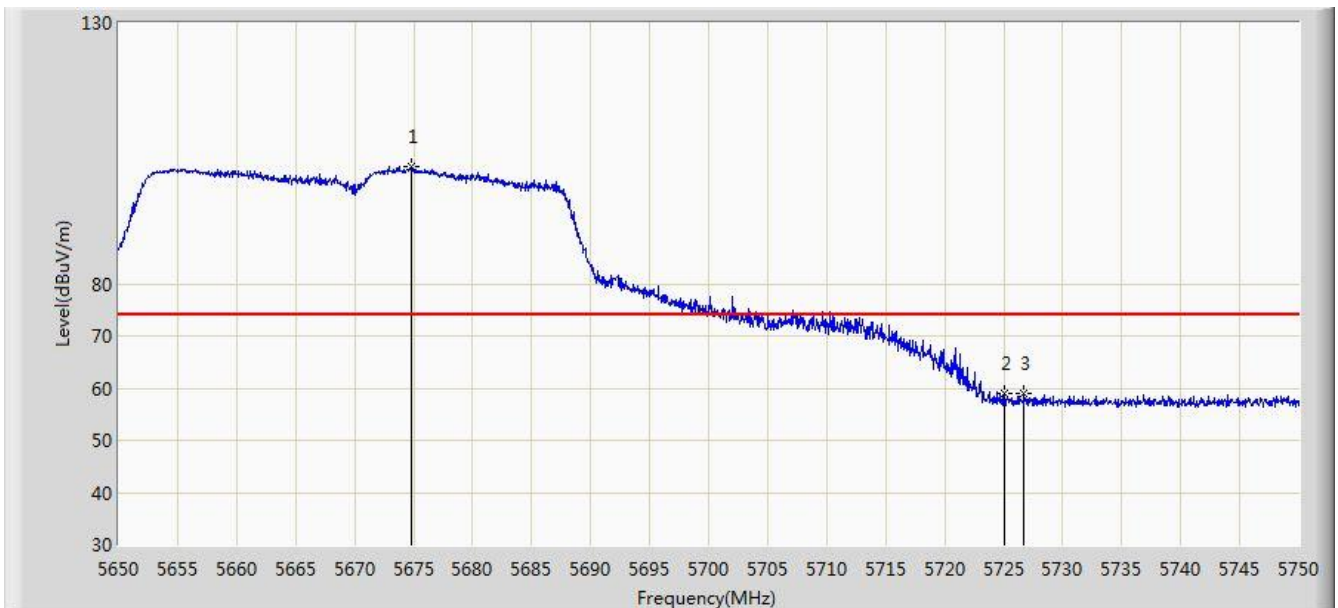


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.800	102.347	97.581	N/A	N/A	4.767	PK
2			5725.000	58.856	53.827	-15.144	74.000	5.029	PK
3			5726.700	58.899	53.859	-15.101	74.000	5.040	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

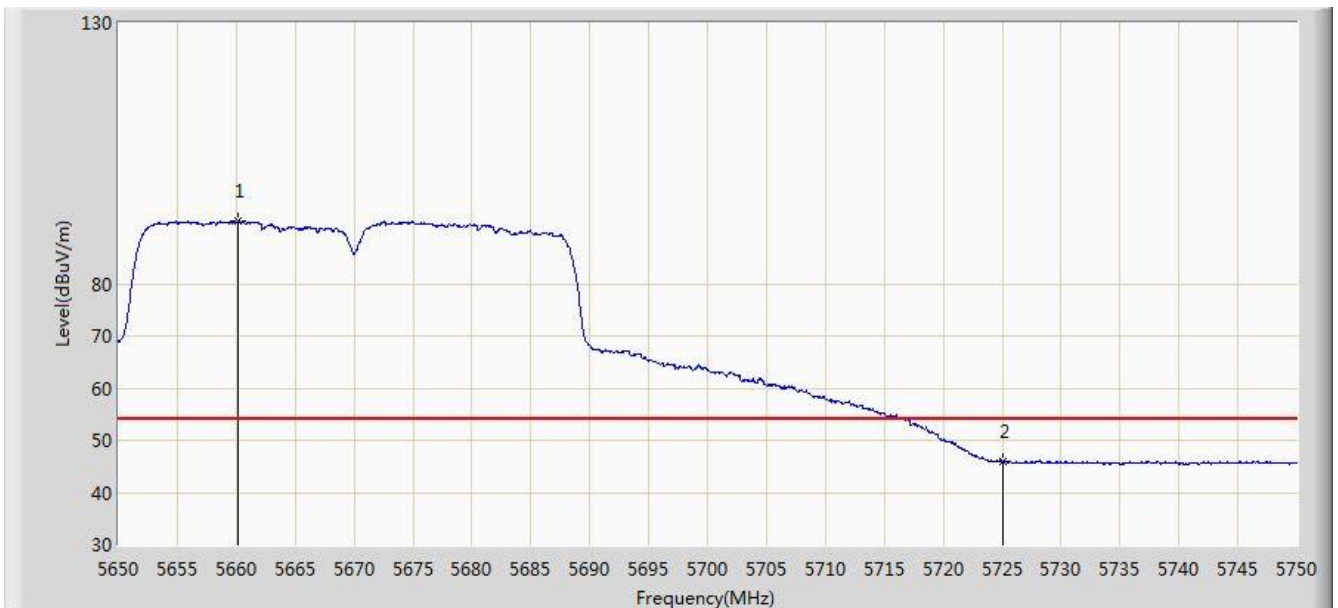


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5660.100	92.026	87.319	N/A	N/A	4.707	AV
2			5725.000	45.936	40.907	-8.064	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

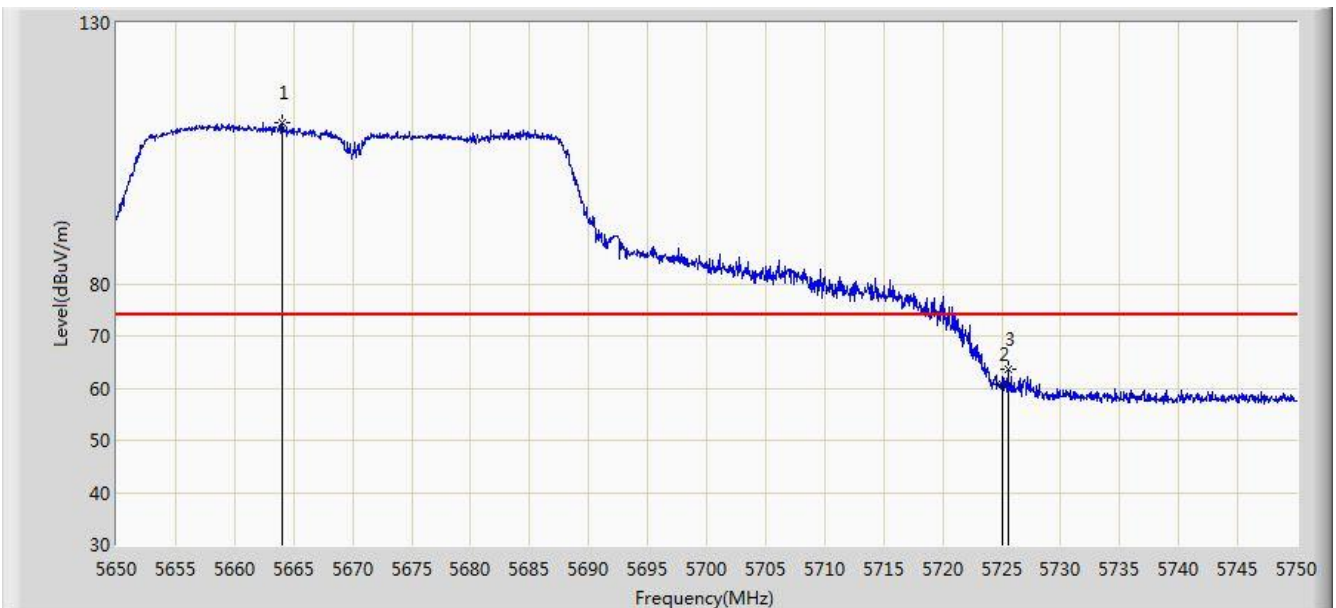


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5664.000	110.961	106.238	N/A	N/A	4.723	PK
2			5725.000	60.714	55.685	-13.286	74.000	5.029	PK
3			5725.550	63.506	58.473	-10.494	74.000	5.032	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

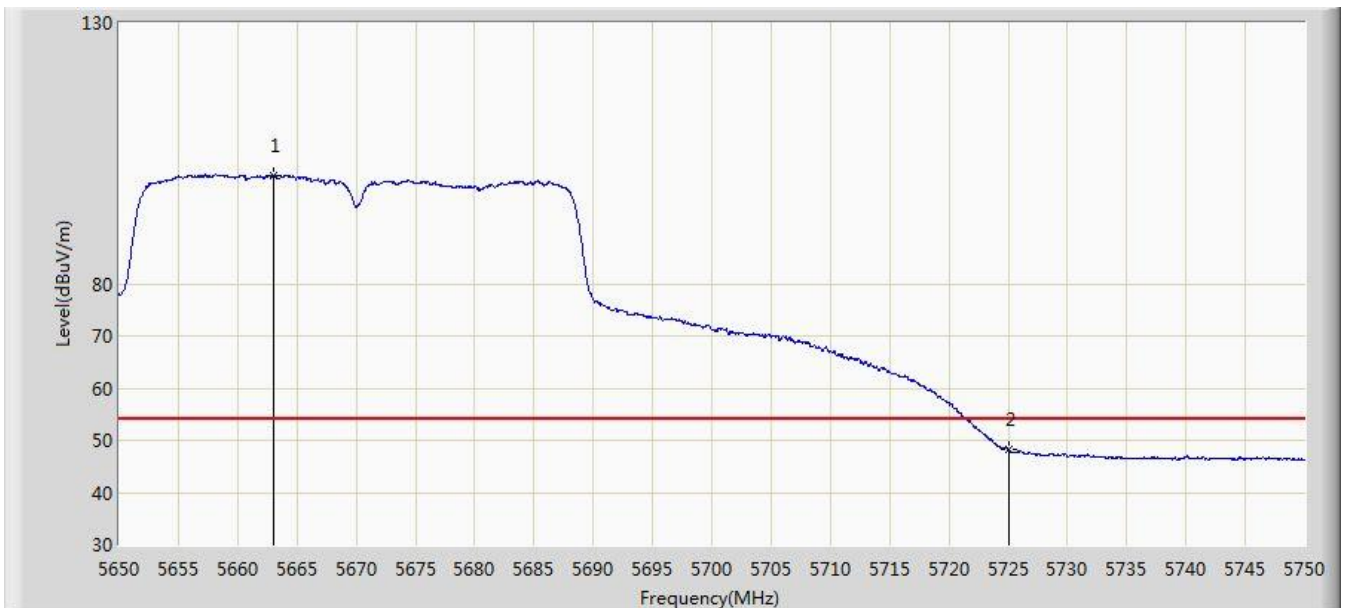


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.000	100.665	95.946	N/A	N/A	4.719	AV
2			5725.000	48.304	43.275	-5.696	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0 + 1	

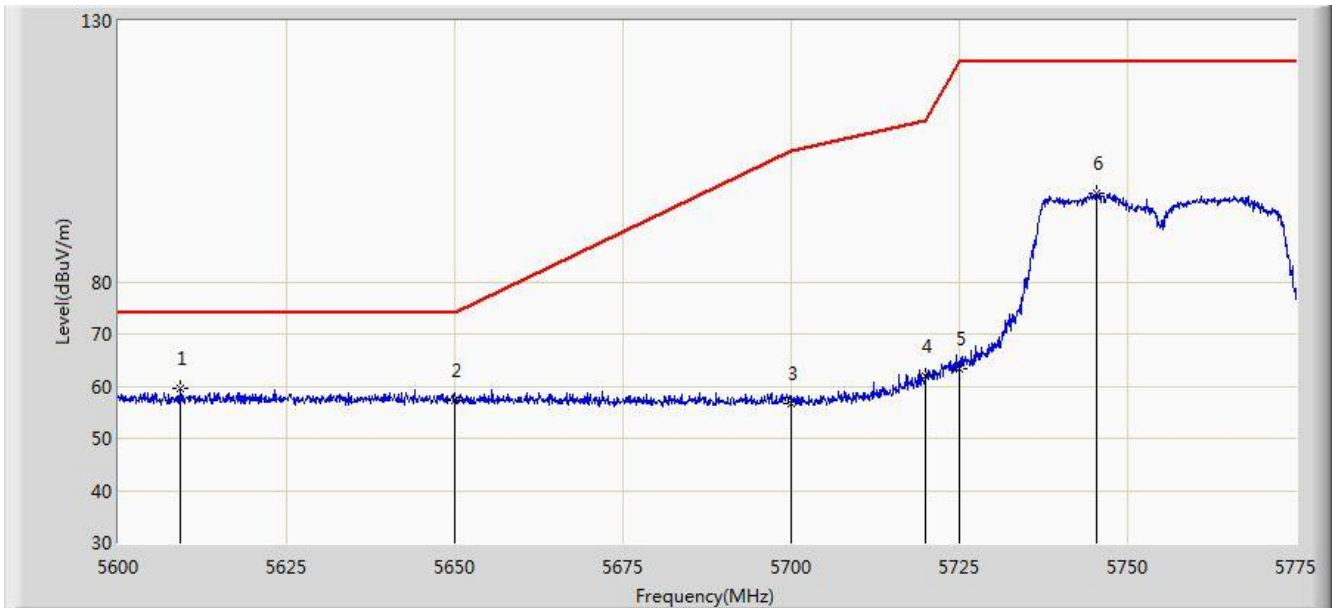


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5609.187	59.695	55.146	-8.505	68.200	4.549	PK
2			5650.000	57.300	52.629	-10.900	68.200	4.671	PK
3			5700.000	56.780	51.902	-48.420	105.200	4.878	PK
4			5720.000	61.866	56.869	-48.934	110.800	4.997	PK
5			5725.000	63.275	58.246	-58.925	122.200	5.029	PK
6			5745.337	96.981	91.824	N/A	N/A	5.158	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0 + 1	

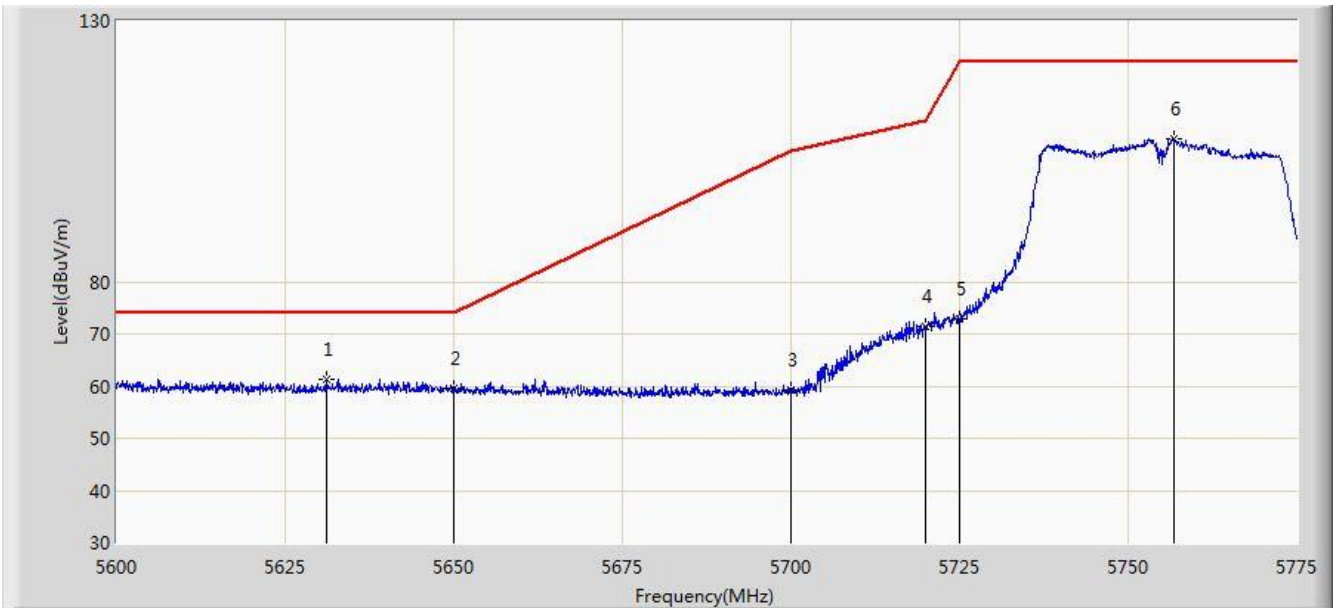


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5631.062	61.439	56.827	-6.761	68.200	4.612	PK
2			5650.000	59.526	54.855	-8.674	68.200	4.671	PK
3			5700.000	59.209	54.331	-45.991	105.200	4.878	PK
4			5720.000	71.437	66.440	-39.363	110.800	4.997	PK
5			5725.000	72.885	67.856	-49.315	122.200	5.029	PK
6			5756.712	107.340	102.119	N/A	N/A	5.221	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0 + 1	

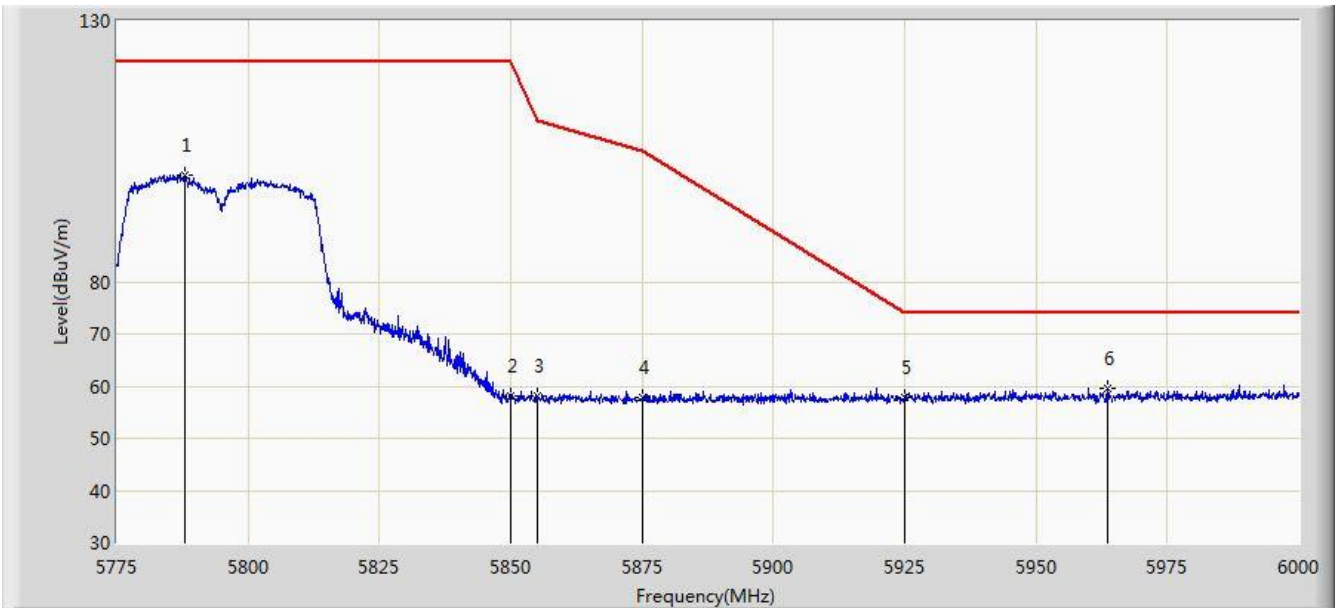


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5788.050	100.551	95.169	N/A	N/A	5.382	PK
2			5850.000	58.223	52.497	-63.977	122.200	5.726	PK
3			5855.000	58.065	52.319	-52.735	110.800	5.746	PK
4			5875.000	57.865	52.045	-47.335	105.200	5.820	PK
5			5925.000	57.712	51.746	-10.488	68.200	5.967	PK
6		*	5963.550	59.491	53.441	-8.709	68.200	6.050	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 07:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0 + 1	

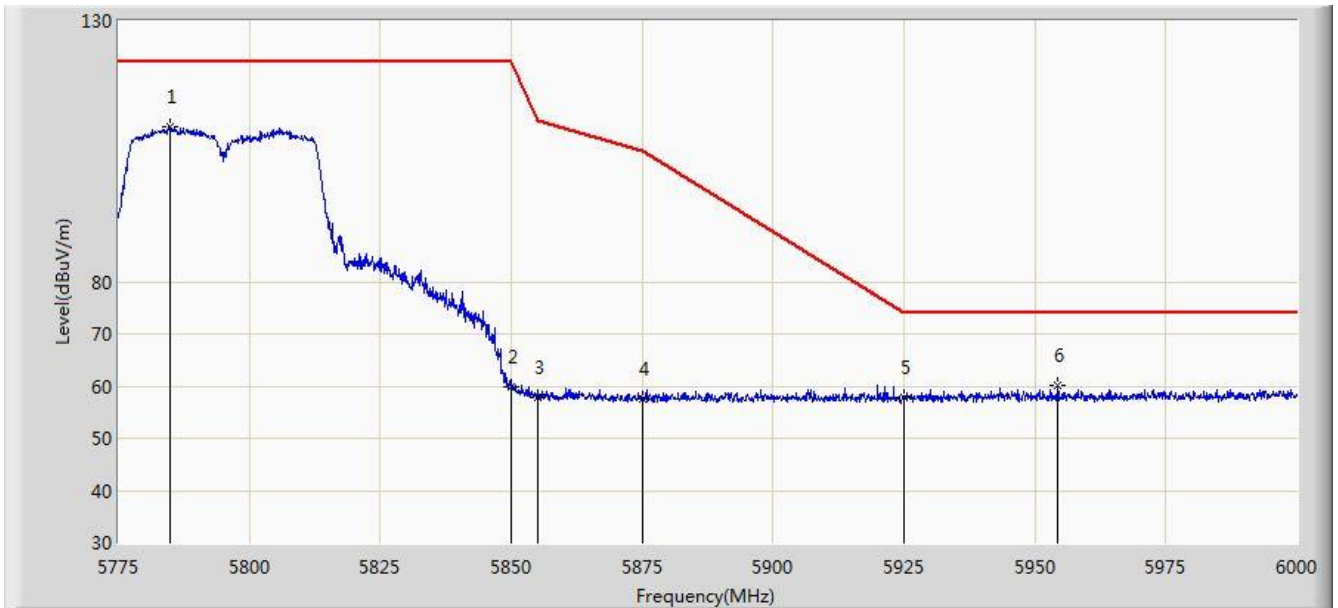


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5784.788	109.712	104.346	N/A	N/A	5.366	PK
2			5850.000	59.841	54.115	-62.359	122.200	5.726	PK
3			5855.000	57.929	52.183	-52.871	110.800	5.746	PK
4			5875.000	57.566	51.746	-47.634	105.200	5.820	PK
5			5925.000	57.766	51.800	-10.434	68.200	5.967	PK
6		*	5954.437	60.028	53.994	-8.172	68.200	6.034	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 22:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

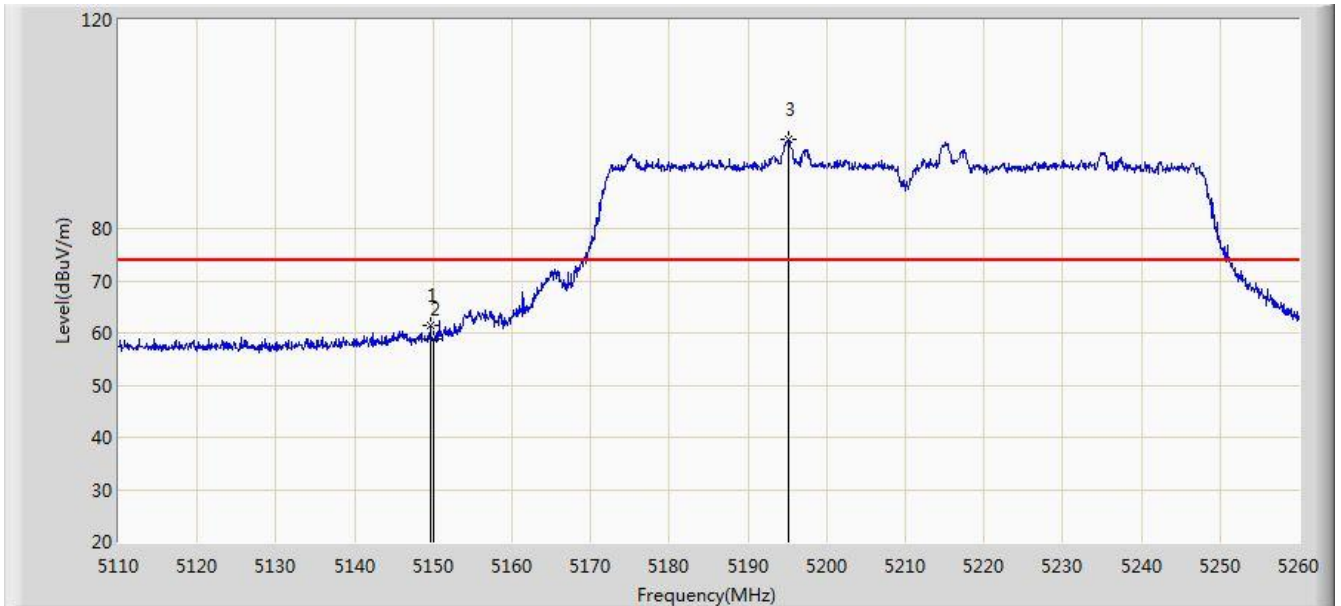


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.600	61.445	57.274	-12.555	74.000	4.170	PK
2			5150.000	58.714	54.545	-15.286	74.000	4.170	PK
3		*	5195.125	96.970	92.955	N/A	N/A	4.015	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 22:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

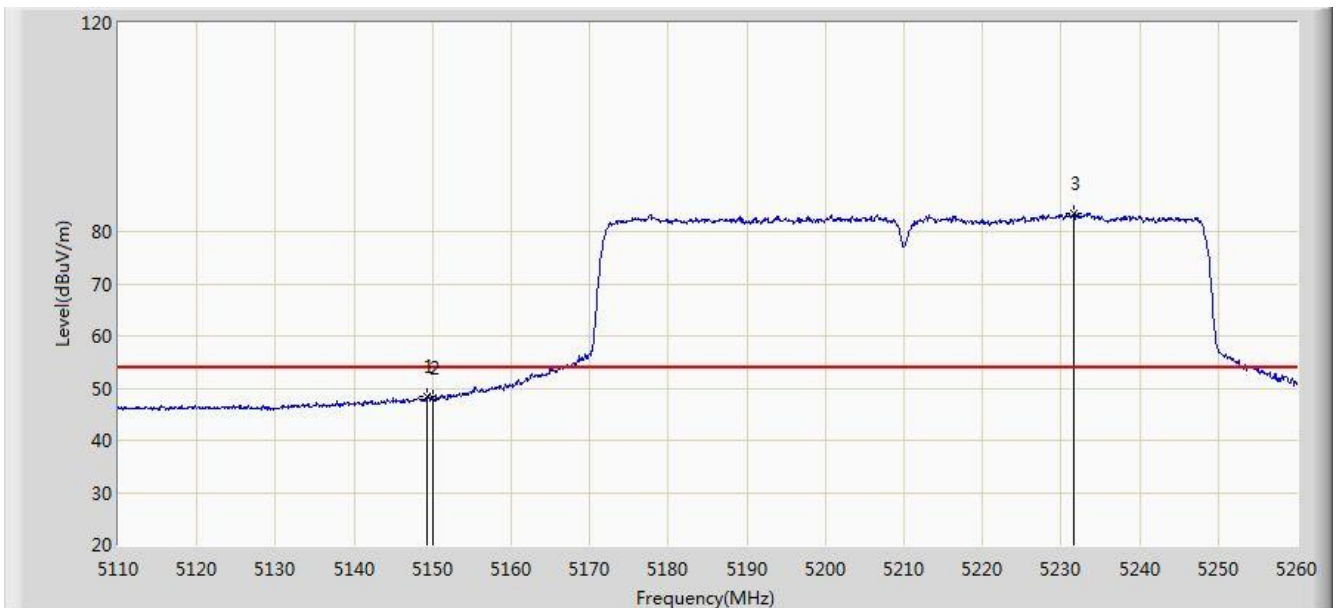

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.375	48.293	44.122	-5.707	54.000	4.171	AV
2			5150.000	48.037	43.868	-5.963	54.000	4.170	AV
3		*	5231.650	83.530	79.626	N/A	N/A	3.905	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 22:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.075	65.488	61.312	-8.512	74.000	4.175	PK
2			5150.000	64.491	60.322	-9.509	74.000	4.170	PK
3		*	5214.925	103.709	99.755	N/A	N/A	3.954	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 22:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

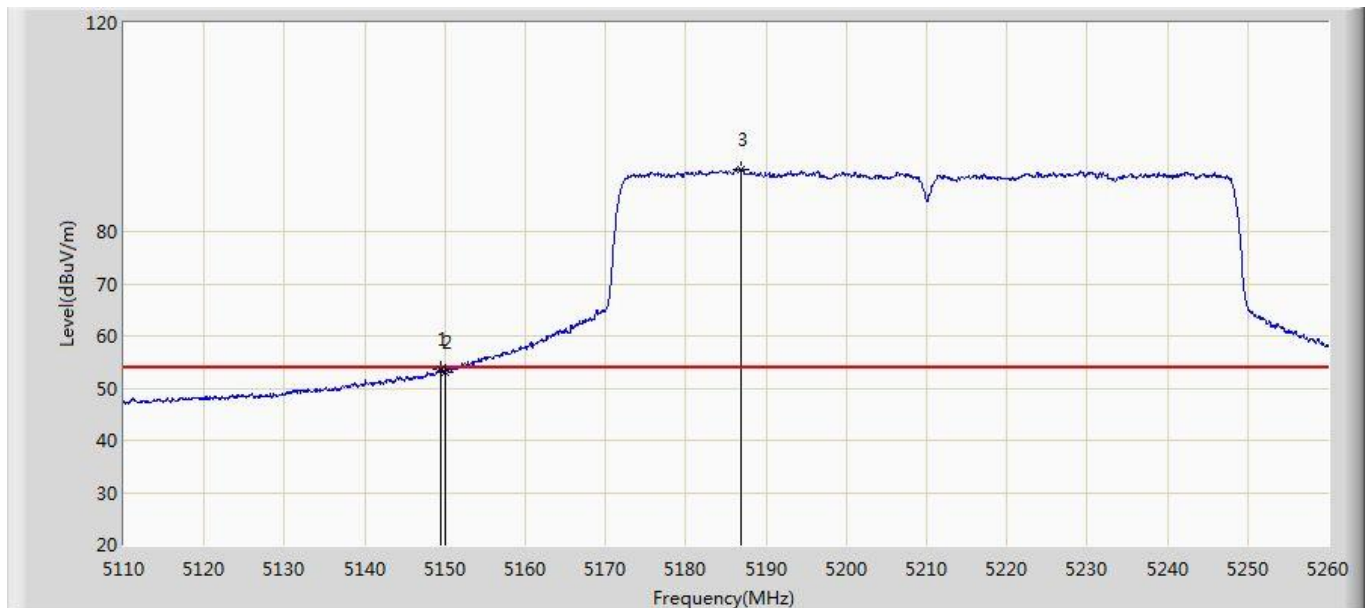


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.525	53.570	49.399	-0.430	54.000	4.170	AV
2			5150.000	53.124	48.955	-0.876	54.000	4.170	AV
3		*	5186.950	91.896	87.852	N/A	N/A	4.044	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 22:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

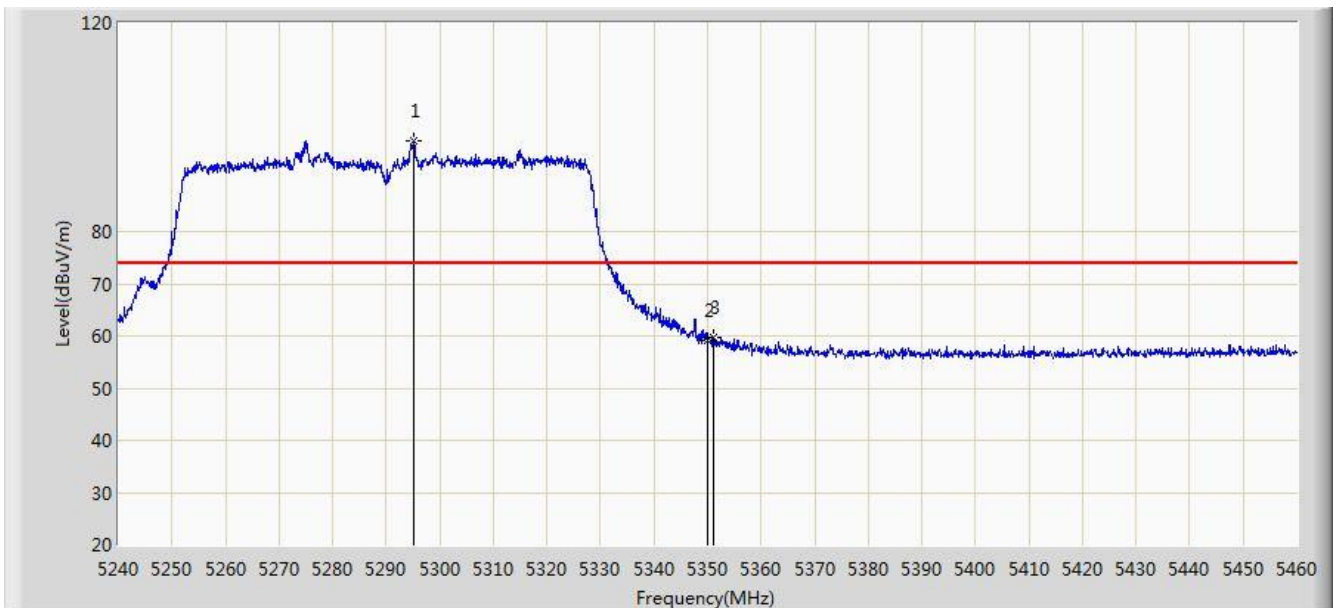


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.000	97.284	93.467	N/A	N/A	3.816	PK
2			5350.000	59.229	55.324	-14.771	74.000	3.904	PK
3			5351.210	59.571	55.664	-14.429	74.000	3.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 22:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

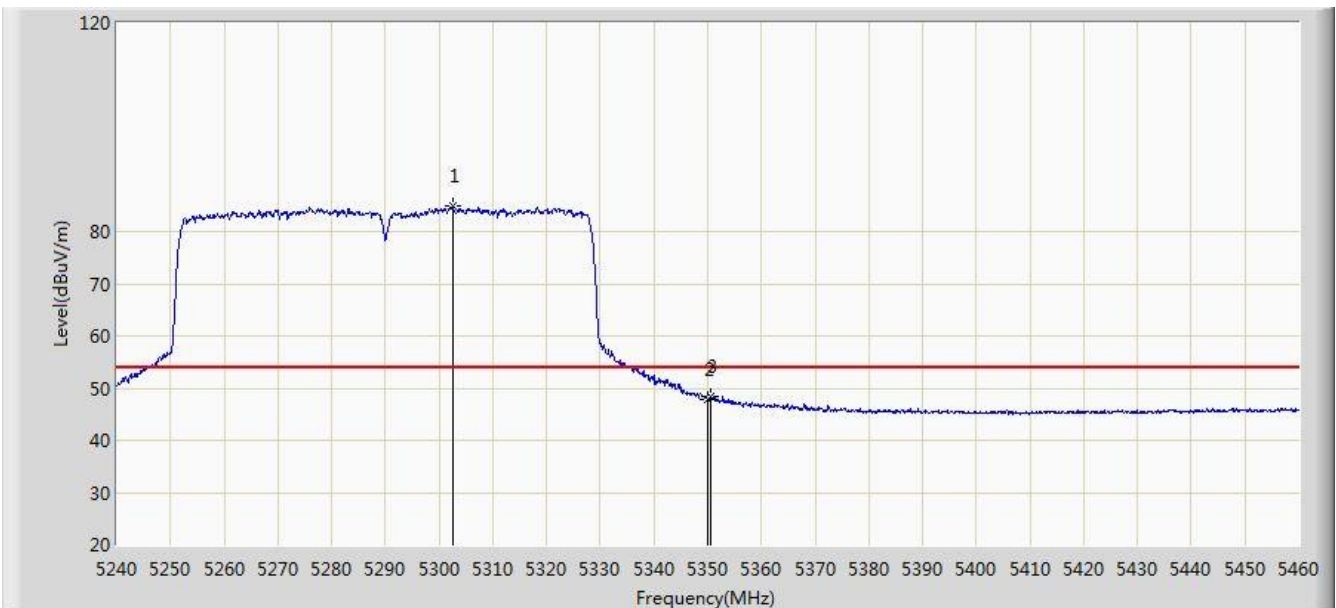


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.480	84.890	81.074	N/A	N/A	3.816	AV
2			5350.000	47.937	44.032	-6.063	54.000	3.904	AV
3			5350.550	48.384	44.478	-5.616	54.000	3.906	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 22:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

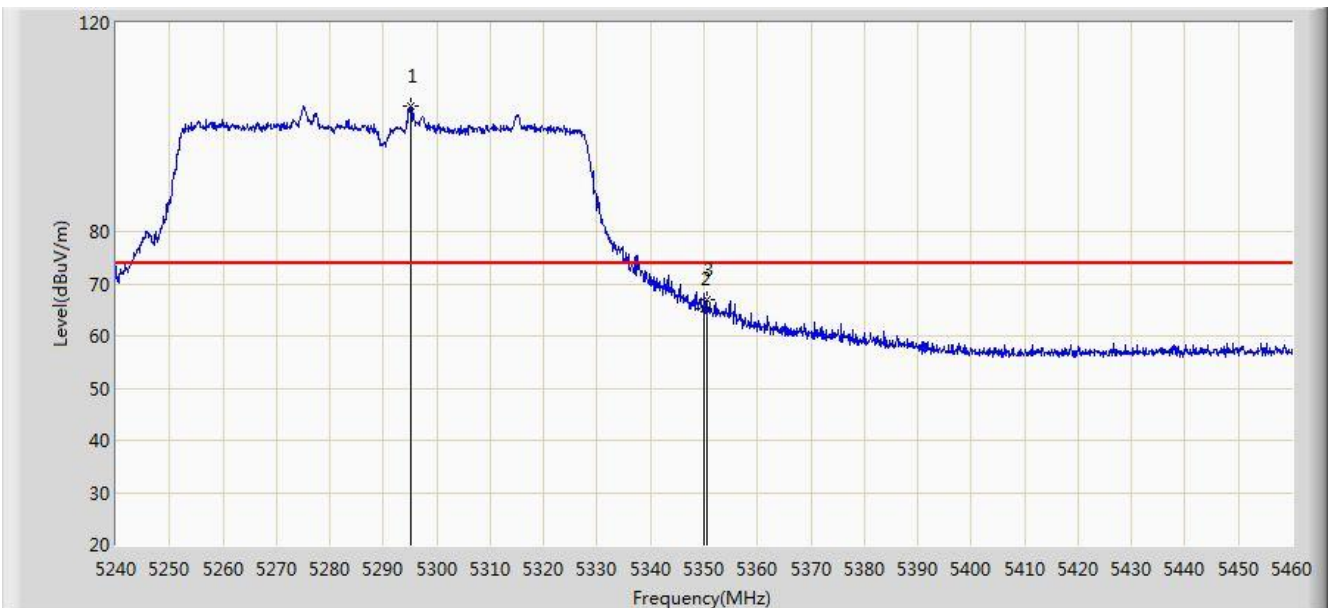


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.110	104.136	100.319	N/A	N/A	3.817	PK
2			5350.000	65.154	61.249	-8.846	74.000	3.904	PK
3			5350.440	67.025	63.120	-6.975	74.000	3.906	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

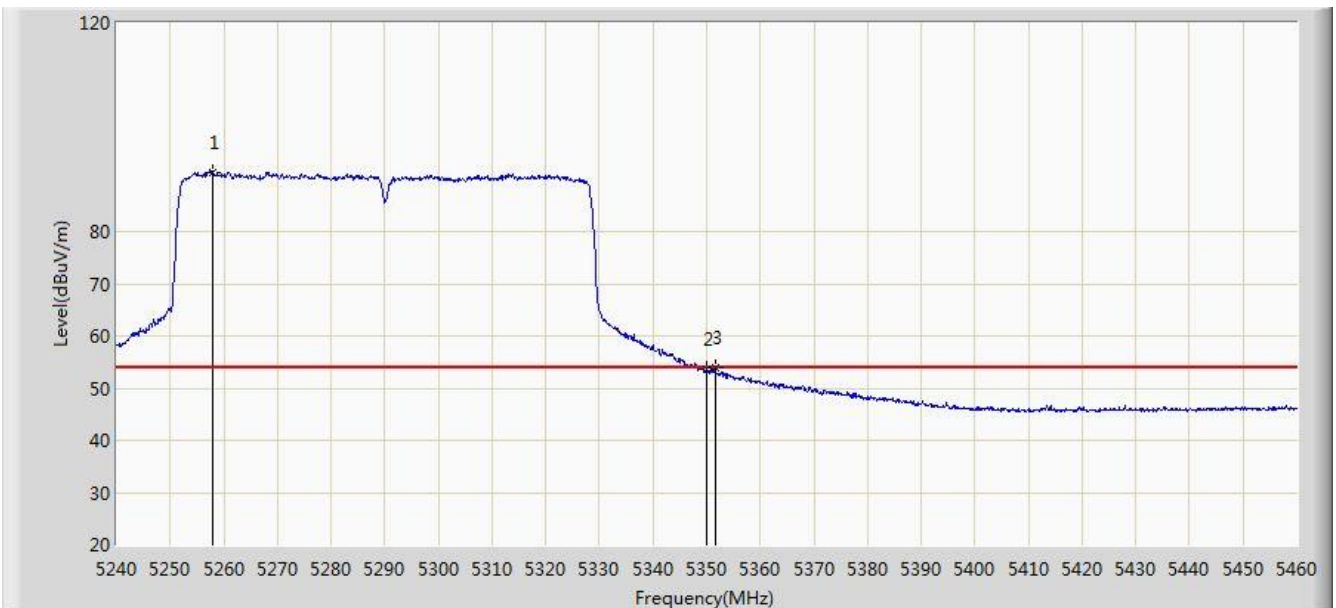


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5257.820	91.324	87.480	N/A	N/A	3.845	AV
2			5350.000	53.624	49.719	-0.376	54.000	3.904	AV
3			5351.650	53.795	49.887	-0.205	54.000	3.908	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

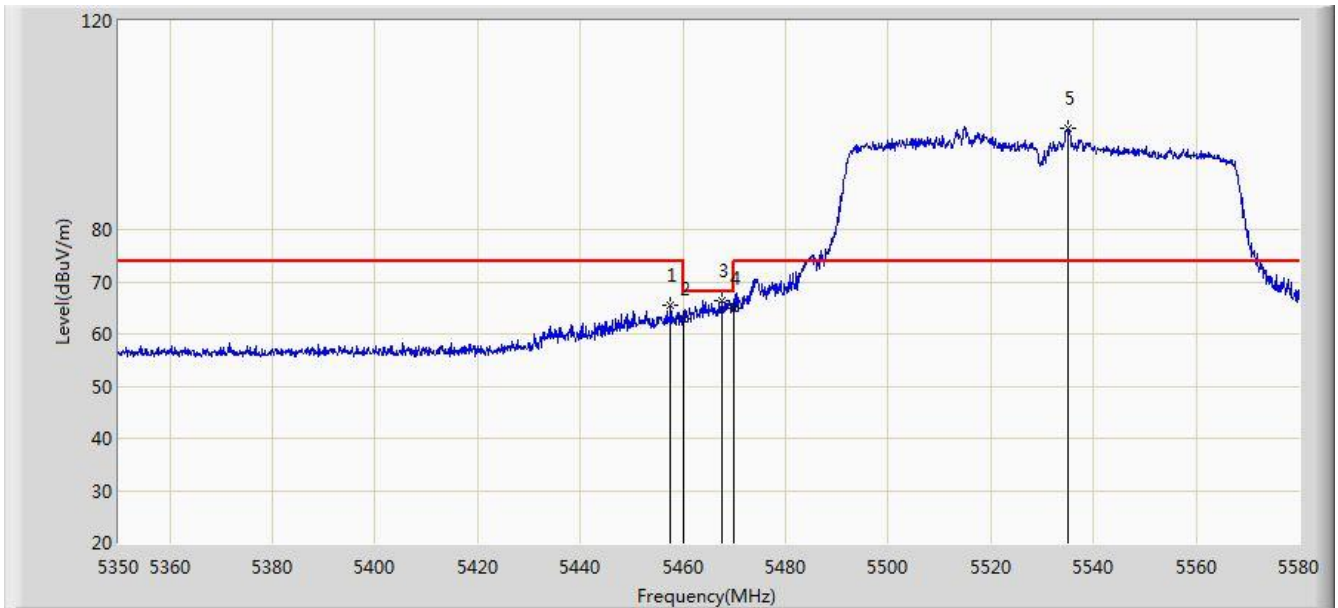


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.640	65.458	61.283	-8.542	74.000	4.176	PK
2			5460.000	62.950	58.770	-11.050	74.000	4.180	PK
3			5467.530	66.420	62.223	-1.780	68.200	4.197	PK
4			5470.000	64.928	60.726	-3.272	68.200	4.202	PK
5		*	5534.920	99.349	94.973	N/A	N/A	4.376	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

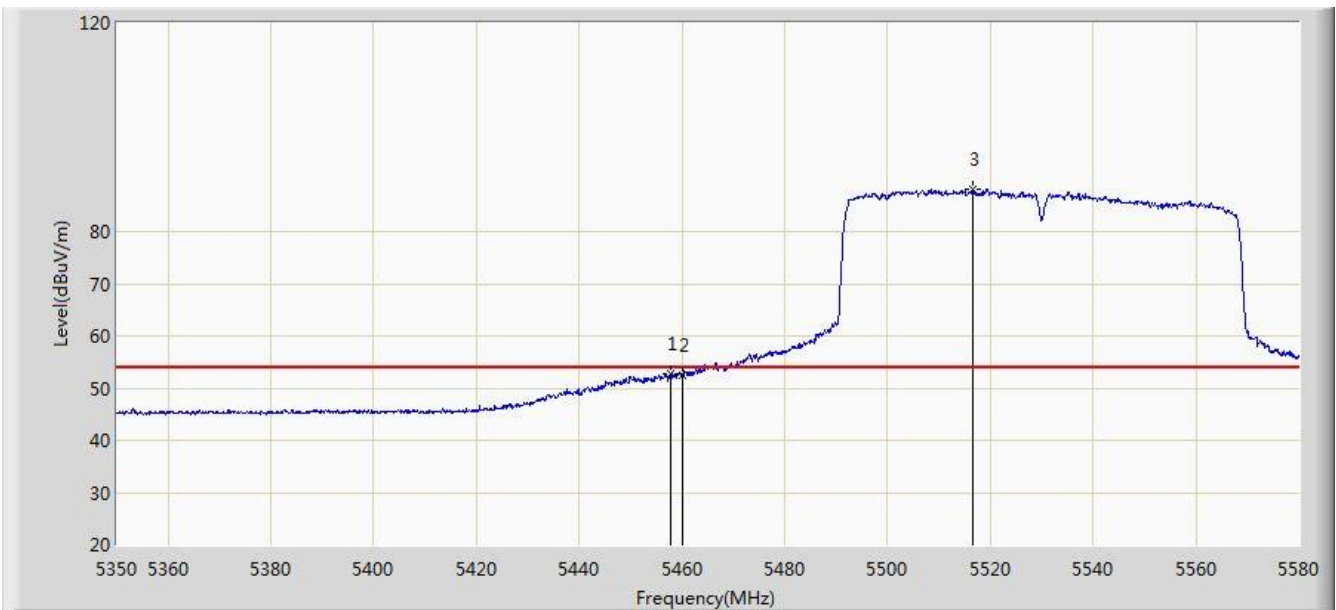


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.870	52.813	48.637	-1.187	54.000	4.176	AV
2			5460.000	52.525	48.345	-1.475	54.000	4.180	AV
3		*	5516.520	88.103	83.783	N/A	N/A	4.321	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

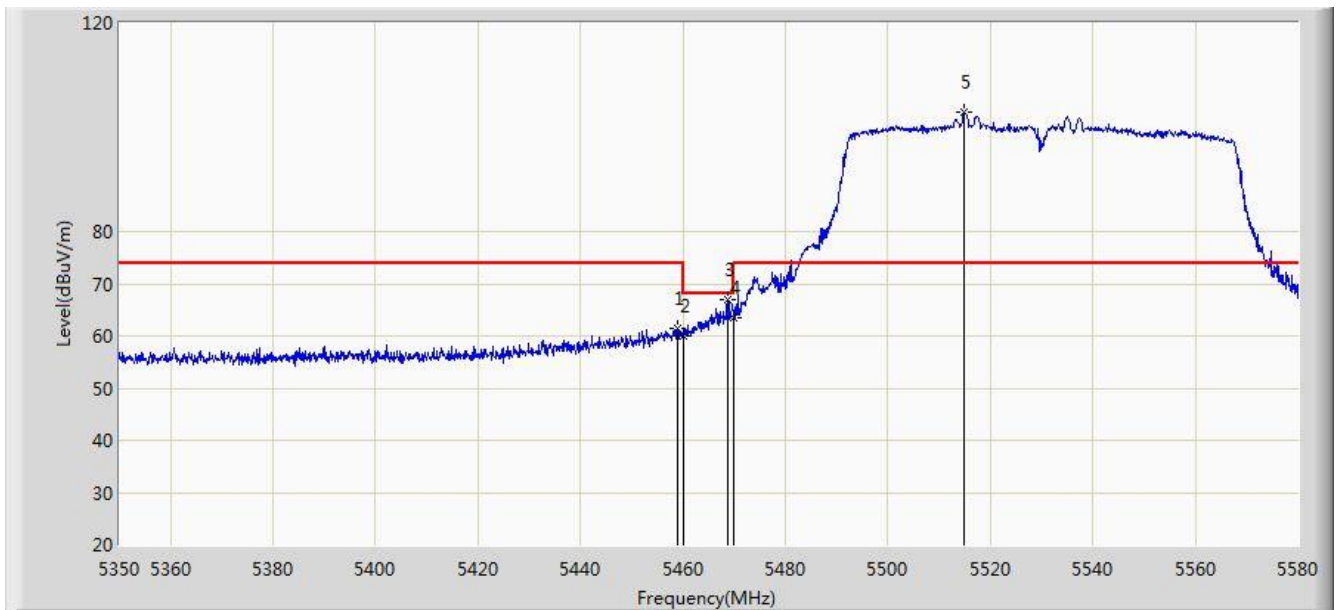


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.020	61.498	57.320	-12.502	74.000	4.178	PK
2			5460.000	60.061	55.881	-13.939	74.000	4.180	PK
3			5468.680	67.064	62.865	-1.136	68.200	4.199	PK
4			5470.000	63.623	59.421	-4.577	68.200	4.202	PK
5		*	5514.910	102.812	98.496	N/A	N/A	4.316	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

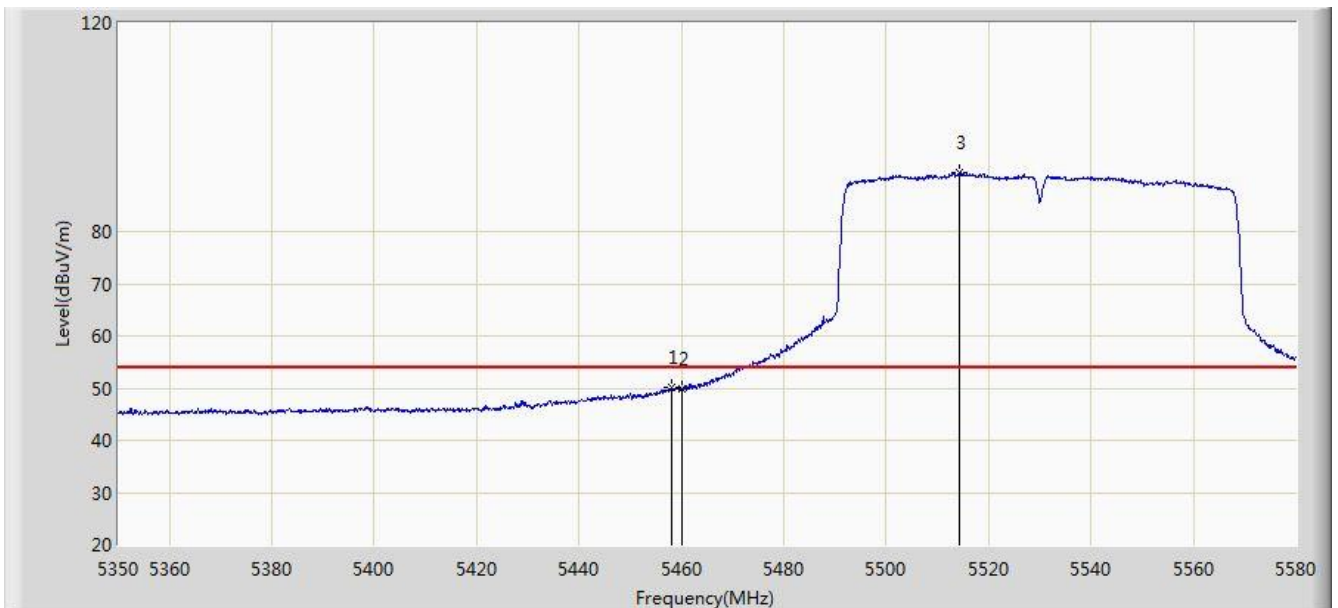


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.100	50.194	46.018	-3.806	54.000	4.176	AV
2			5460.000	49.770	45.590	-4.230	54.000	4.180	AV
3		*	5514.335	91.214	86.900	N/A	N/A	4.313	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

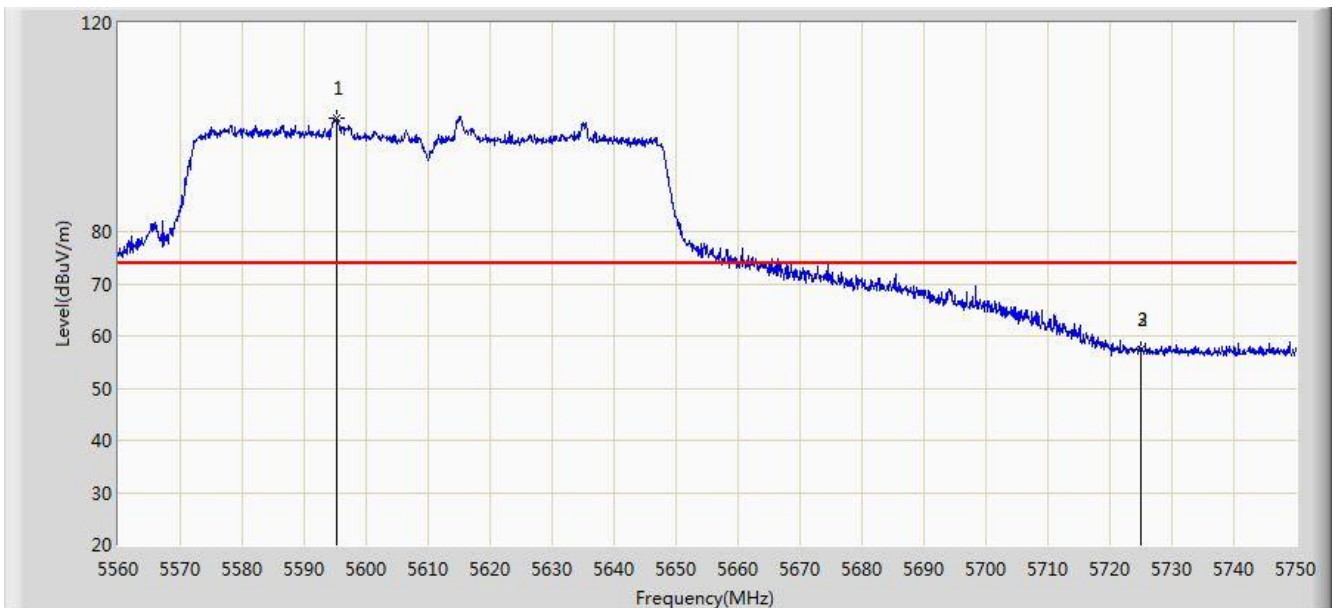


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5595.150	101.872	97.357	N/A	N/A	4.516	PK
2			5725.000	57.510	52.481	-16.490	74.000	5.029	PK
3			5725.000	57.510	52.481	-16.490	74.000	5.029	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

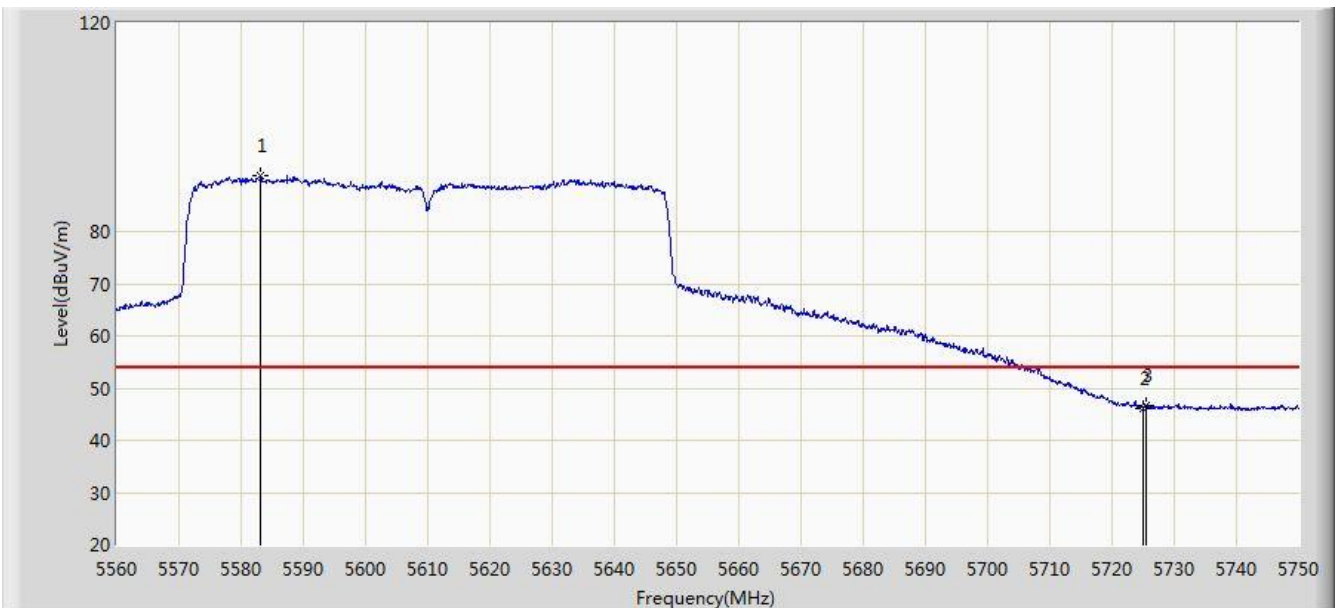


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5583.180	90.677	86.188	N/A	N/A	4.489	AV
2			5725.000	46.199	41.170	-7.801	54.000	5.029	AV
3			5725.585	46.758	41.725	-7.242	54.000	5.032	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

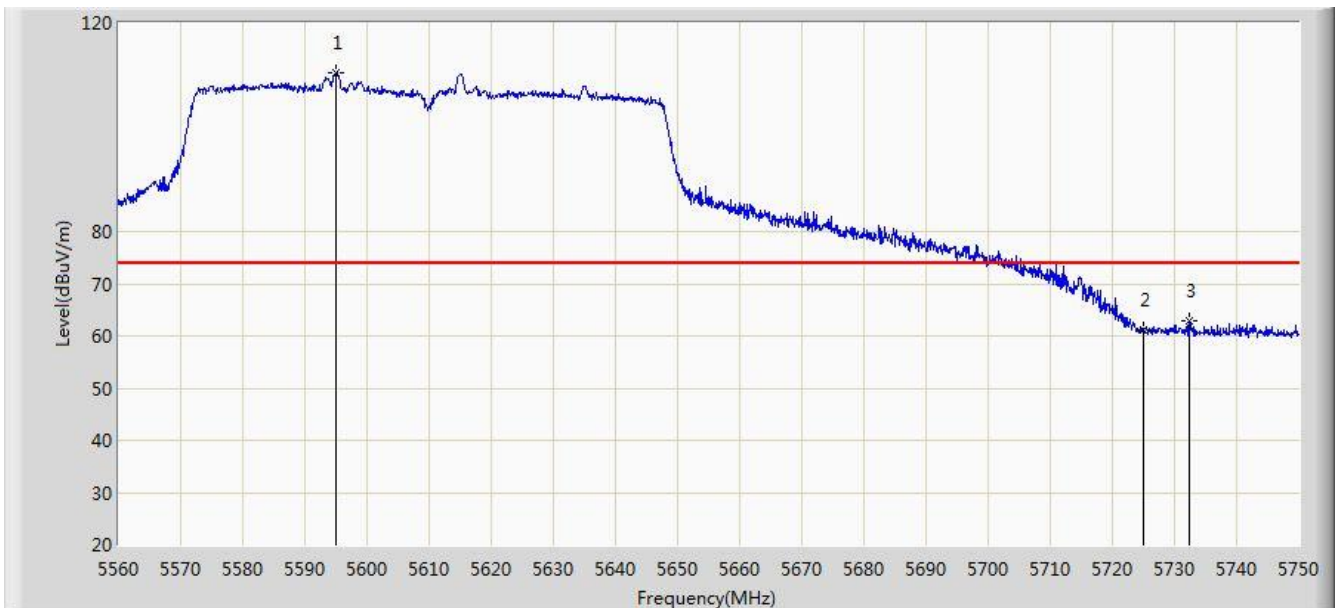


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5595.055	110.454	105.939	N/A	N/A	4.515	PK
2			5725.000	61.220	56.191	-12.780	74.000	5.029	PK
3			5732.425	62.907	57.831	-11.093	74.000	5.076	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

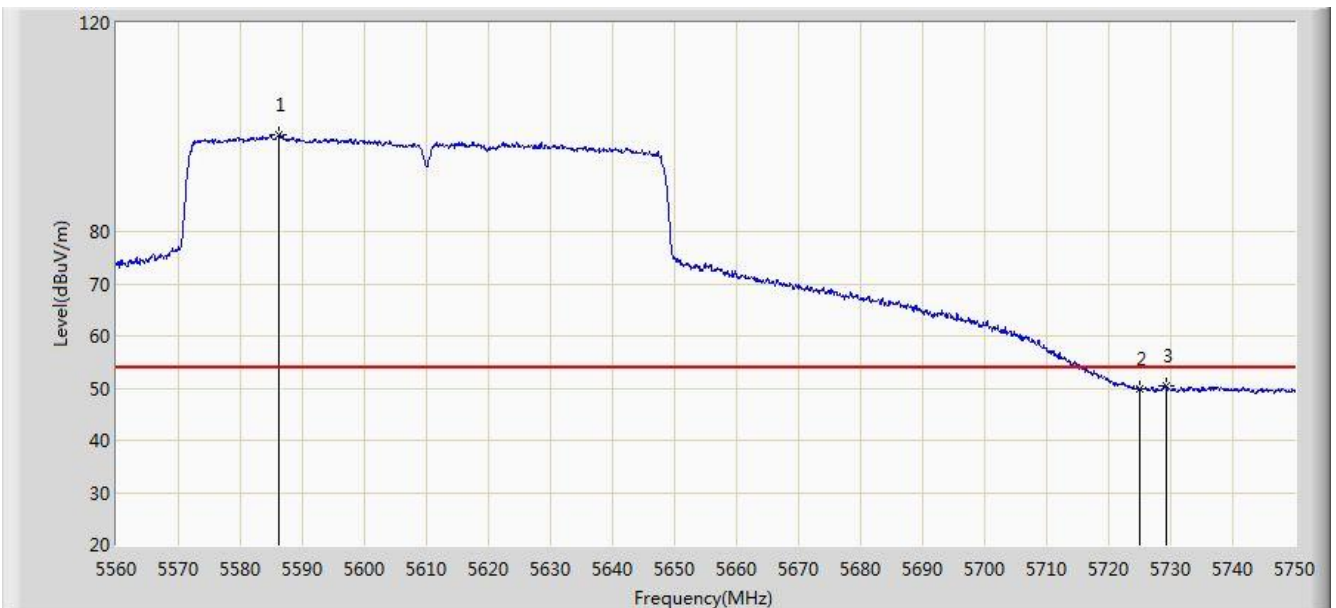


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5586.125	98.556	94.061	N/A	N/A	4.495	AV
2			5725.000	49.712	44.683	-4.288	54.000	5.029	AV
3			5729.195	50.338	45.282	-3.662	54.000	5.055	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

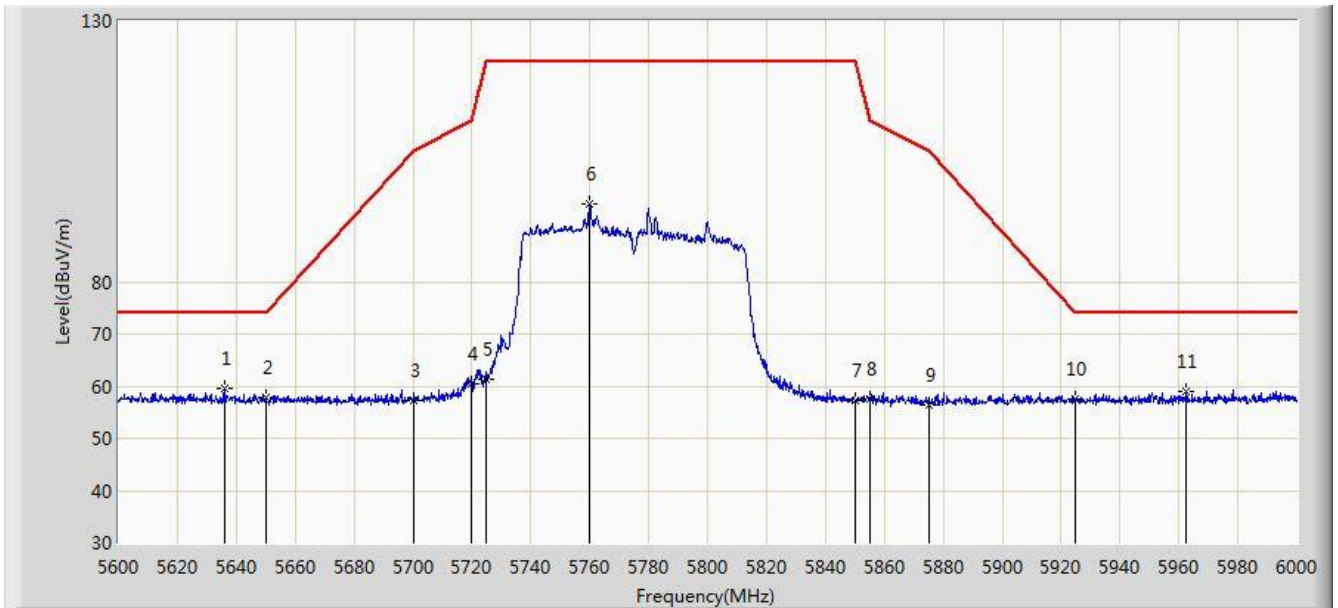


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5636.000	59.421	54.795	-8.779	68.200	4.627	PK
2			5650.000	57.800	53.129	-10.400	68.200	4.671	PK
3			5700.000	57.360	52.482	-47.840	105.200	4.878	PK
4			5720.000	60.497	55.500	-50.303	110.800	4.997	PK
5			5725.000	61.172	56.143	-61.028	122.200	5.029	PK
6			5760.000	94.988	89.748	N/A	N/A	5.240	PK
7			5850.000	57.339	51.613	-64.861	122.200	5.726	PK
8			5855.000	57.510	51.764	-53.290	110.800	5.746	PK
9			5875.000	56.398	50.578	-48.802	105.200	5.820	PK
10			5925.000	57.513	51.547	-10.687	68.200	5.967	PK
11			5962.600	59.043	52.995	-9.157	68.200	6.048	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/26 - 23:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

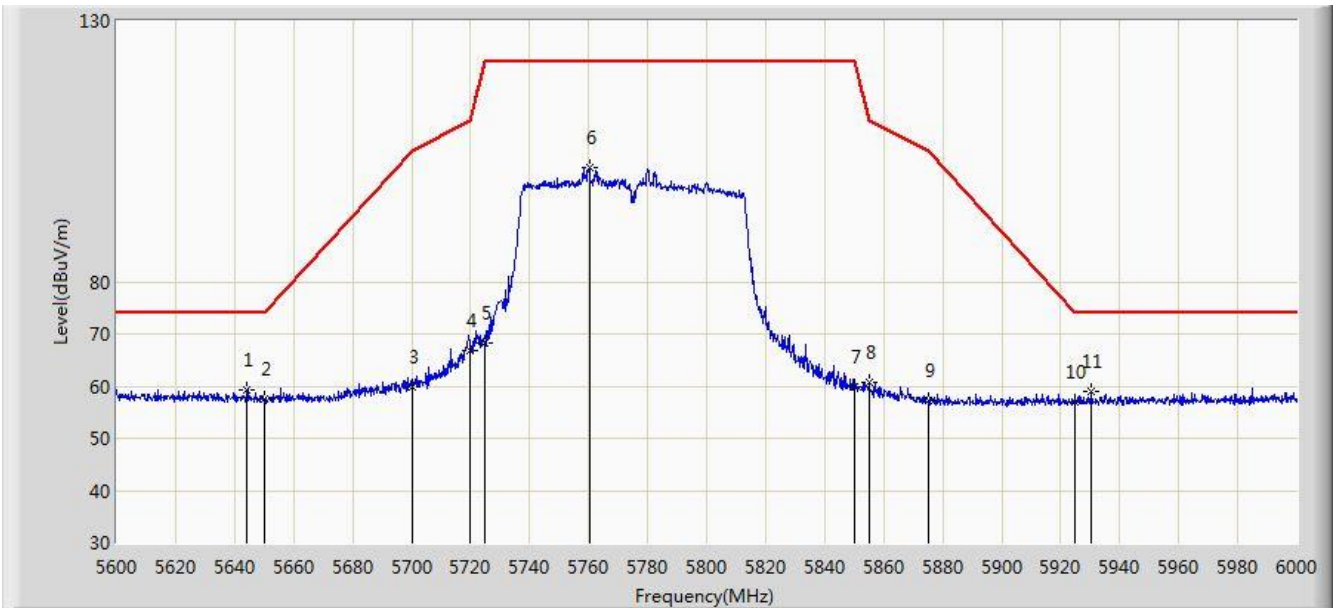

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5644.200	59.352	54.700	-8.848	68.200	4.651	PK
2			5650.000	57.437	52.766	-10.763	68.200	4.671	PK
3			5700.000	59.855	54.977	-45.345	105.200	4.878	PK
4			5720.000	66.946	61.949	-43.854	110.800	4.997	PK
5			5725.000	68.290	63.261	-53.910	122.200	5.029	PK
6			5760.200	101.901	96.660	N/A	N/A	5.241	PK
7			5850.000	59.737	54.011	-62.463	122.200	5.726	PK
8			5855.000	60.814	55.068	-49.986	110.800	5.746	PK
9			5875.000	57.245	51.425	-47.955	105.200	5.820	PK
10			5925.000	56.880	50.914	-11.320	68.200	5.967	PK
11			5930.400	59.043	53.063	-9.157	68.200	5.979	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

5.7. 不必要之發射


5.7.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 4.7.4 節：

在 5.725 GHz ~ 5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP) ≤ 27 dBm/MHz ~ 15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz ~ 25 MHz，有效等向輻射功率(EIRP) ≤ 15.6 dBm/MHz ~ 10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz ~ 75 MHz，有效等向輻射功率(EIRP) ≤ 10 dBm/MHz ~ -27

dBm/MHz

(以線性法計算對應之限制值)；所有頻帶邊緣外 ≥ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) ≤ -27 dBm/MHz；

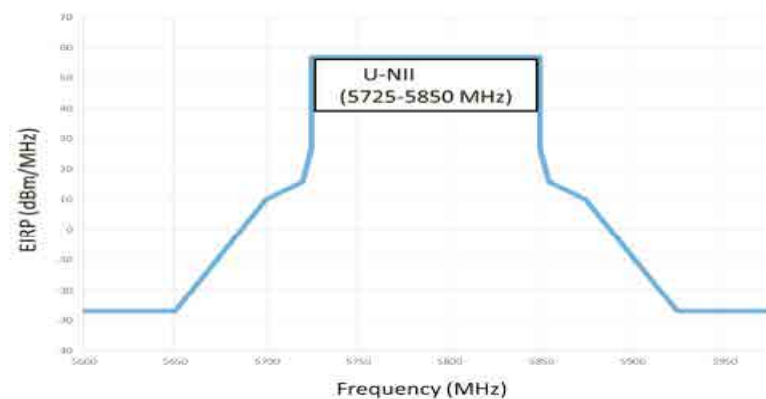

測量不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。

當測量不必要發射之限制值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。

在 1 GHz 以下不必要之發射，應符合 2.8 之規定，任何使用市電為供應電源之設備亦須符合 2.3 之電源線傳導限制值。

不必要發射頻率屬 2.7 規定頻段者，應符合 2.8 之規定。


5.7.2. 量測方法

低頻待測物置於高 80 公分之非導體桌面（落地型產品置於地上），高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。


P.S 若為手持式或穿戴式之裝置，需對其三個正交軸的方位評估測試，並記錄最差的數值。

5.7.3. 測試架構圖


Under 30MHz Test Setup

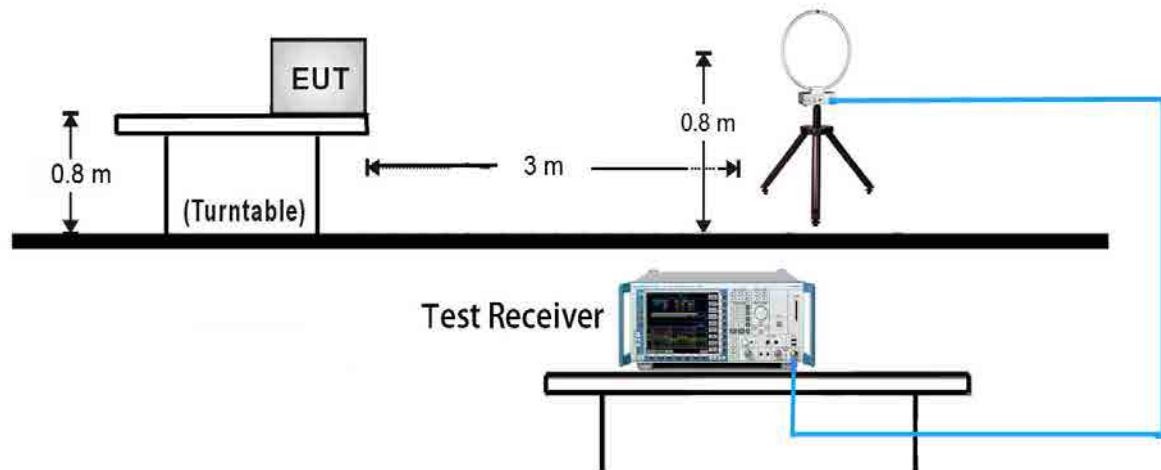

Under 1GHz Test Setup

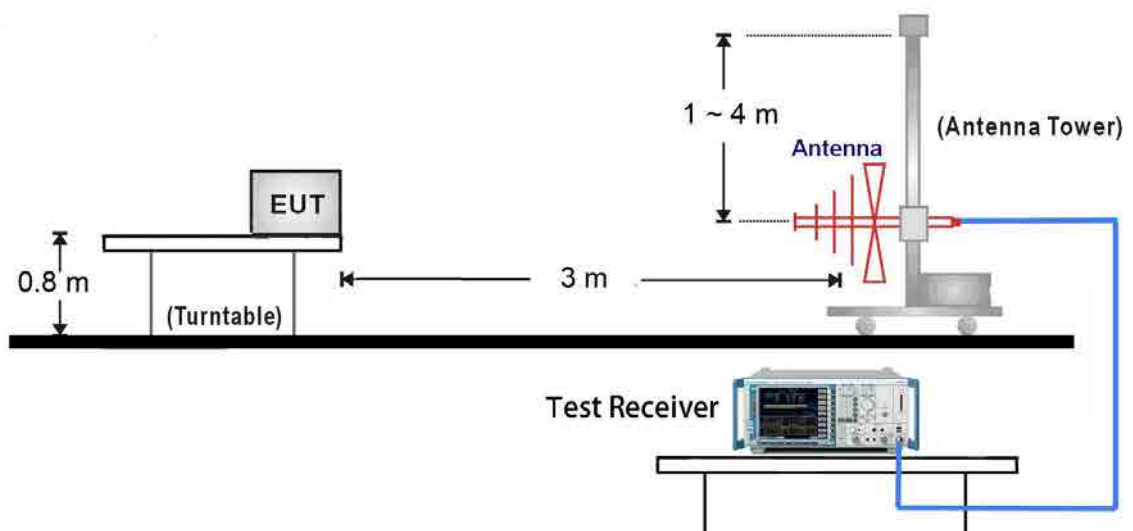

1GHz ~ 18GHz Test Setup

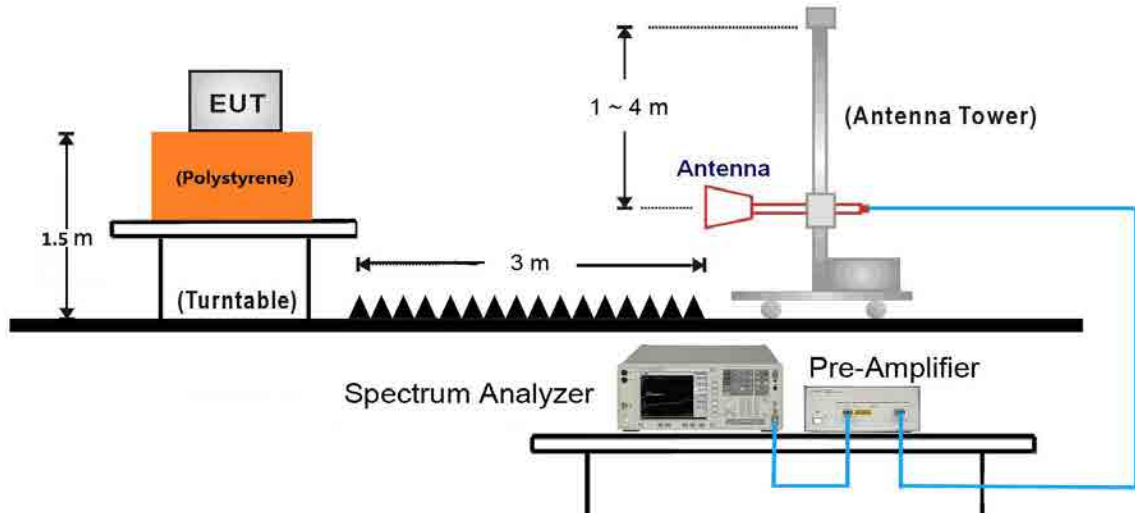

18GHz ~ 40GHz Test Setup

