

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

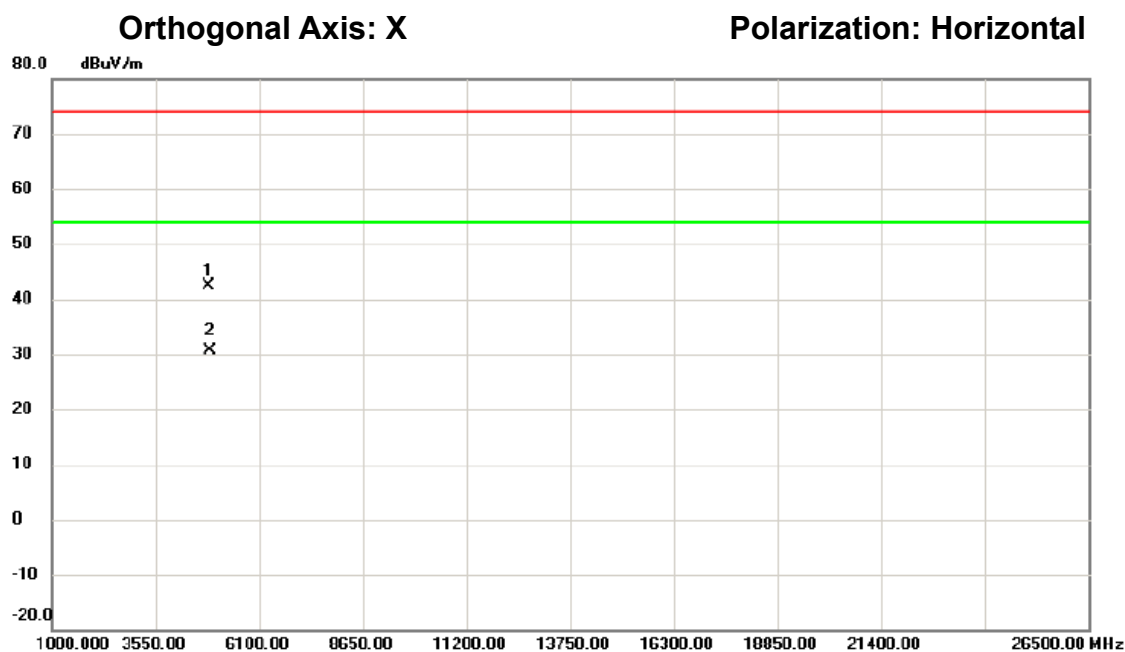

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4861.800	38.84	3.59	42.43	74.00	-31.57	peak	
2	*	4883.000	27.08	3.67	30.75	54.00	-23.25	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/07/19

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

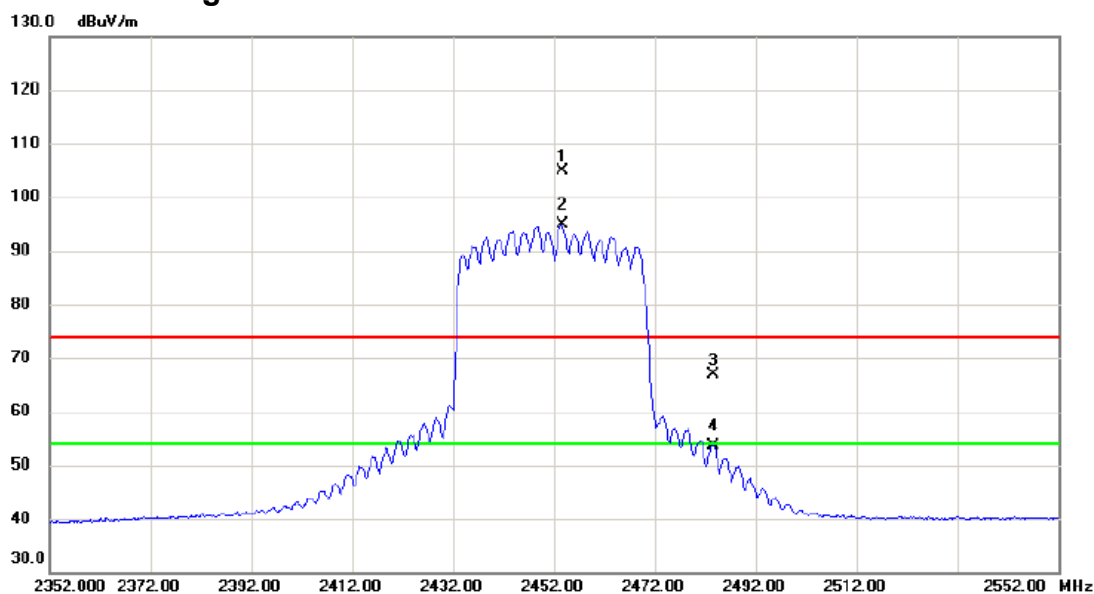

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2453.700	97.47	7.37	104.84	74.00	30.84	peak	主波訊號不予判定
2	*	2453.700	87.49	7.37	94.86	54.00	40.86	AVG	主波訊號不予判定
3		2483.500	59.39	7.47	66.86	74.00	-7.14	peak	
4		2483.500	46.15	7.47	53.62	54.00	-0.38	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/07/19

環境濕度: 52%

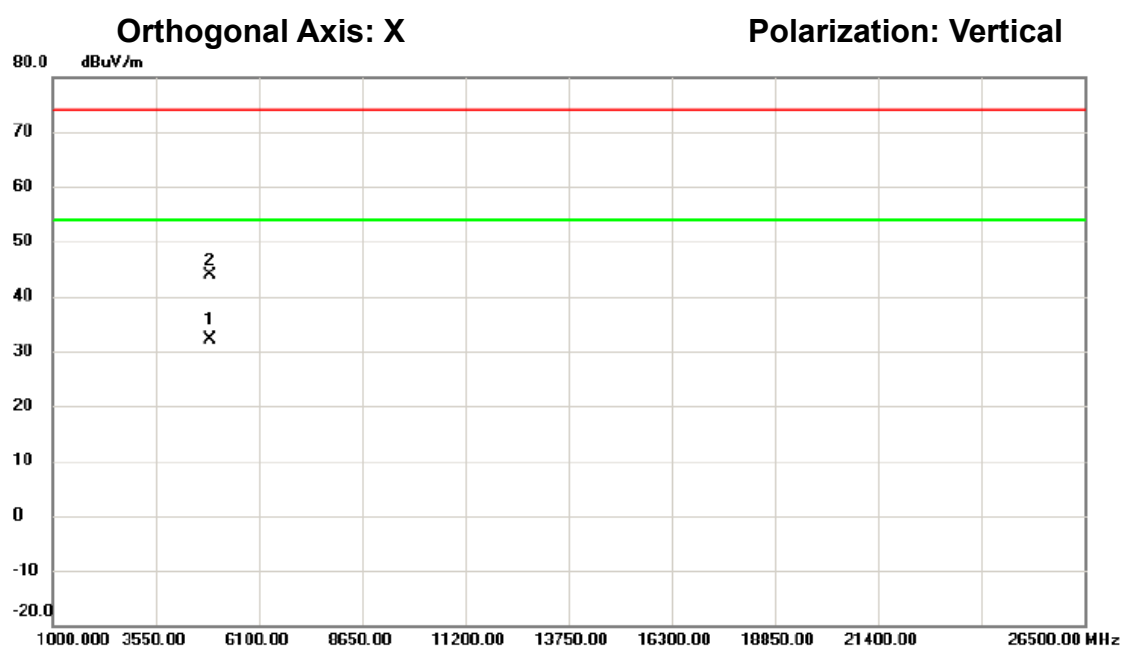

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4894.700	28.34	3.71	32.05	54.00	-21.95	AVG	
2		4900.800	40.04	3.73	43.77	74.00	-30.23	peak	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/07/19

環境濕度: 52%

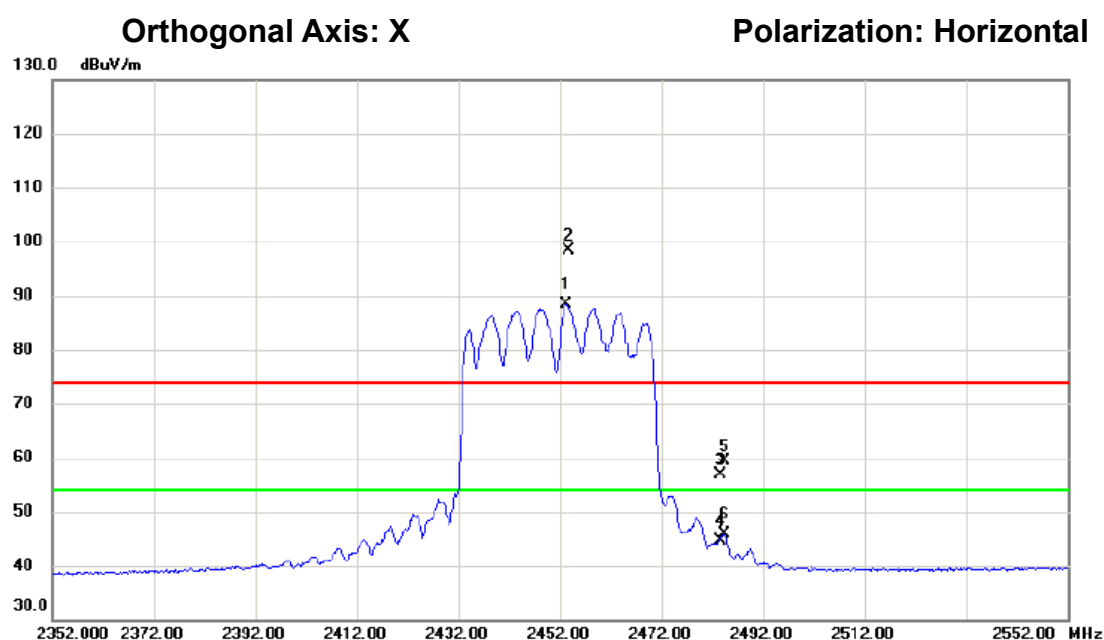

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.200	81.06	7.37	88.43	54.00	34.43	AVG	主波訊號不予判定
2	X	2453.700	90.99	7.37	98.36	74.00	24.36	peak	主波訊號不予判定
3		2483.500	49.46	7.47	56.93	74.00	-17.07	peak	
4		2483.500	37.16	7.47	44.63	54.00	-9.37	AVG	
5		2484.300	51.86	7.47	59.33	74.00	-14.67	peak	
6		2484.300	38.42	7.47	45.89	54.00	-8.11	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/07/19

環境溫度: 24°C


環境濕度: 52%

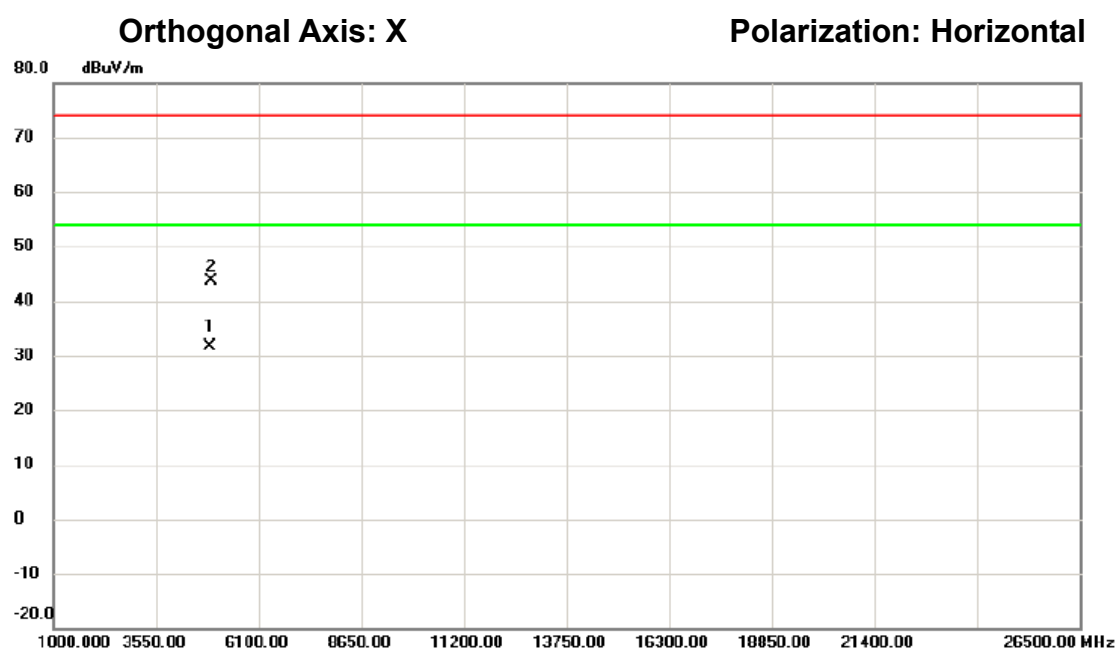

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4904.850	27.77	3.74	31.51	54.00	-22.49	AVG	
2		4921.850	39.74	3.81	43.55	74.00	-30.45	peak	

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

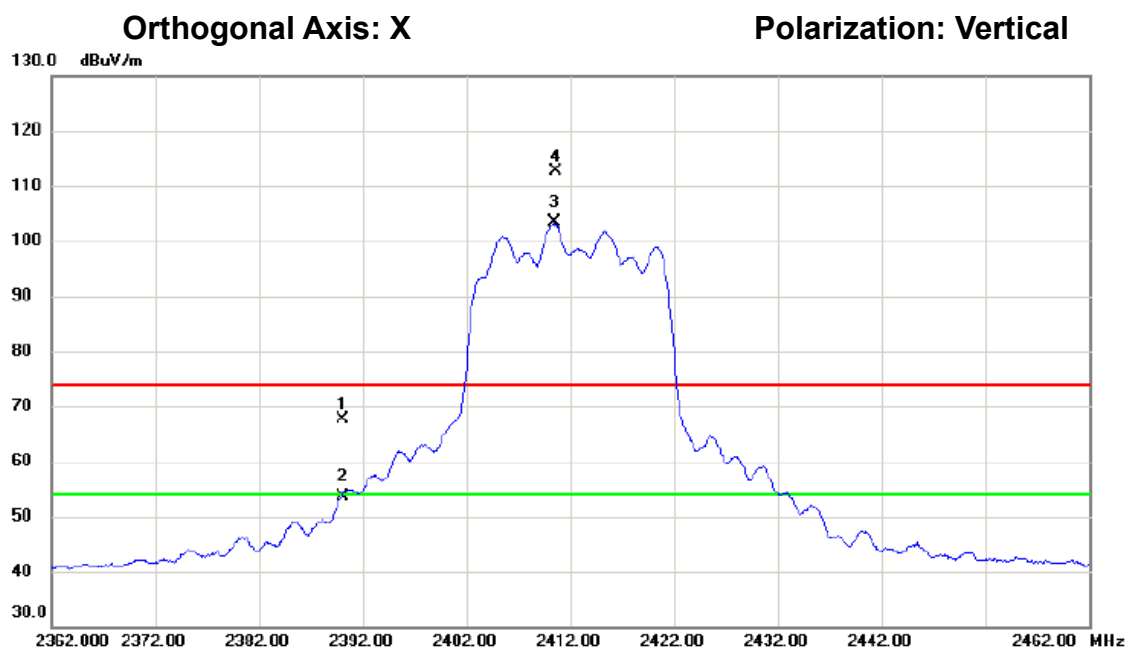

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	60.52	7.17	67.69	74.00	-6.31	peak	
2		2390.000	46.55	7.17	53.72	54.00	-0.28	AVG	
3	*	2410.450	96.12	7.24	103.36	54.00	49.36	AVG	主波訊號不予判定
4	X	2410.550	105.36	7.24	112.60	74.00	38.60	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

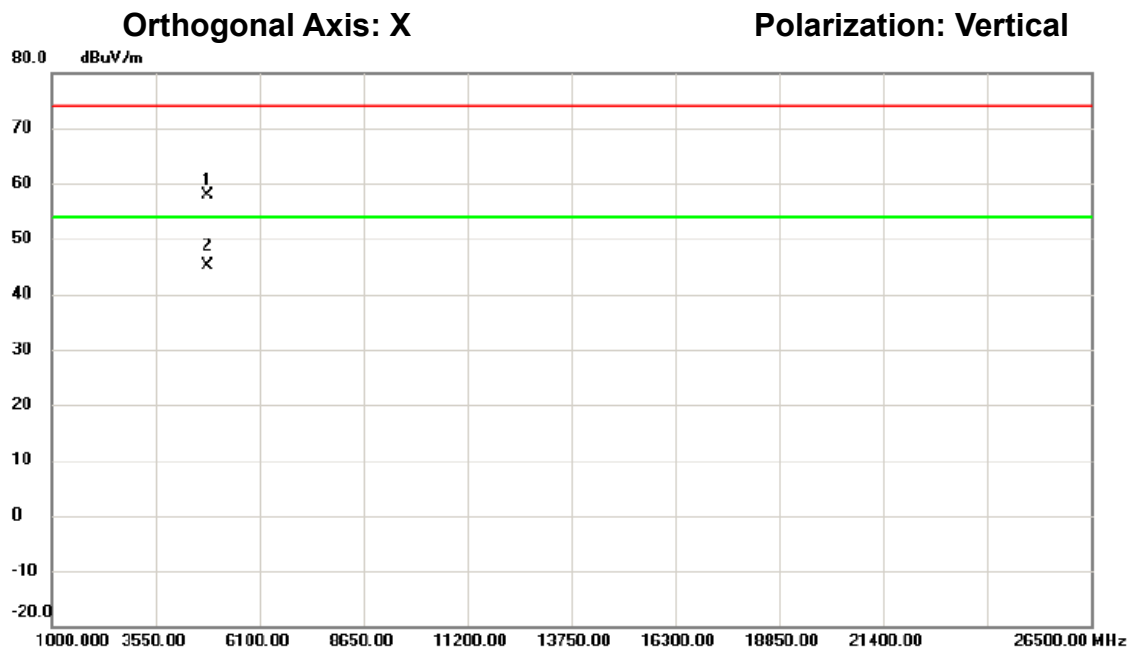

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4820.700	54.37	3.43	57.80	74.00	-16.20	peak	
2	*	4825.220	41.70	3.46	45.16	54.00	-8.84	AVG	

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

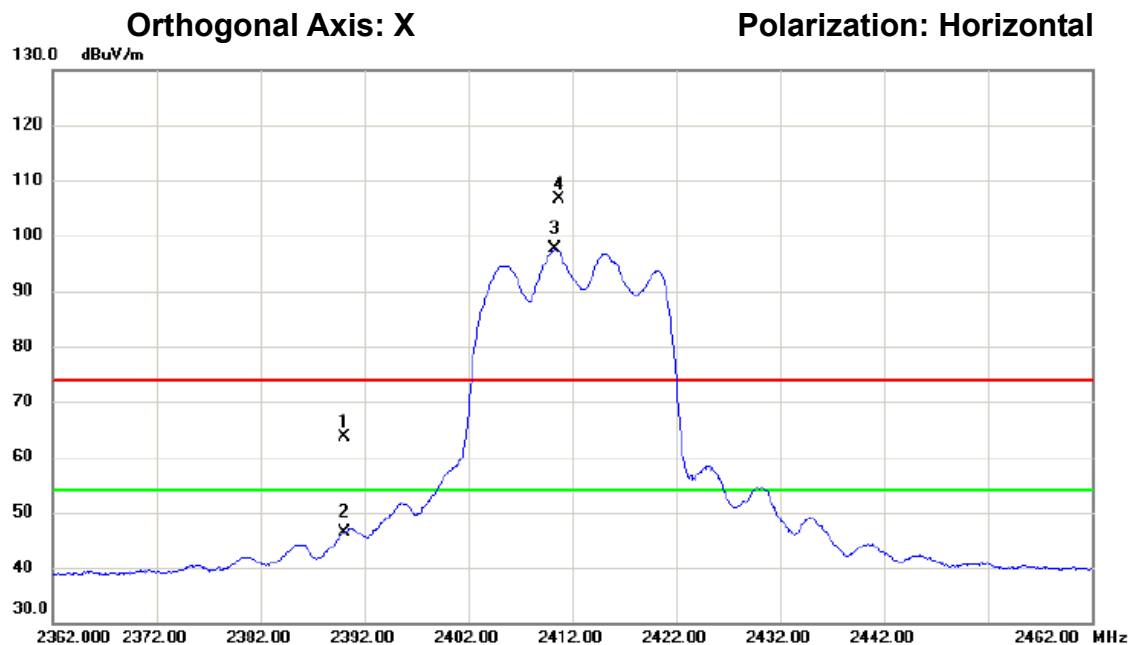

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.54	7.17	63.71	74.00	-10.29	peak	
2		2390.000	39.19	7.17	46.36	54.00	-7.64	AVG	
3	*	2410.350	90.41	7.24	97.65	54.00	43.65	AVG	主波訊號不予判定
4	X	2410.700	99.37	7.24	106.61	74.00	32.61	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

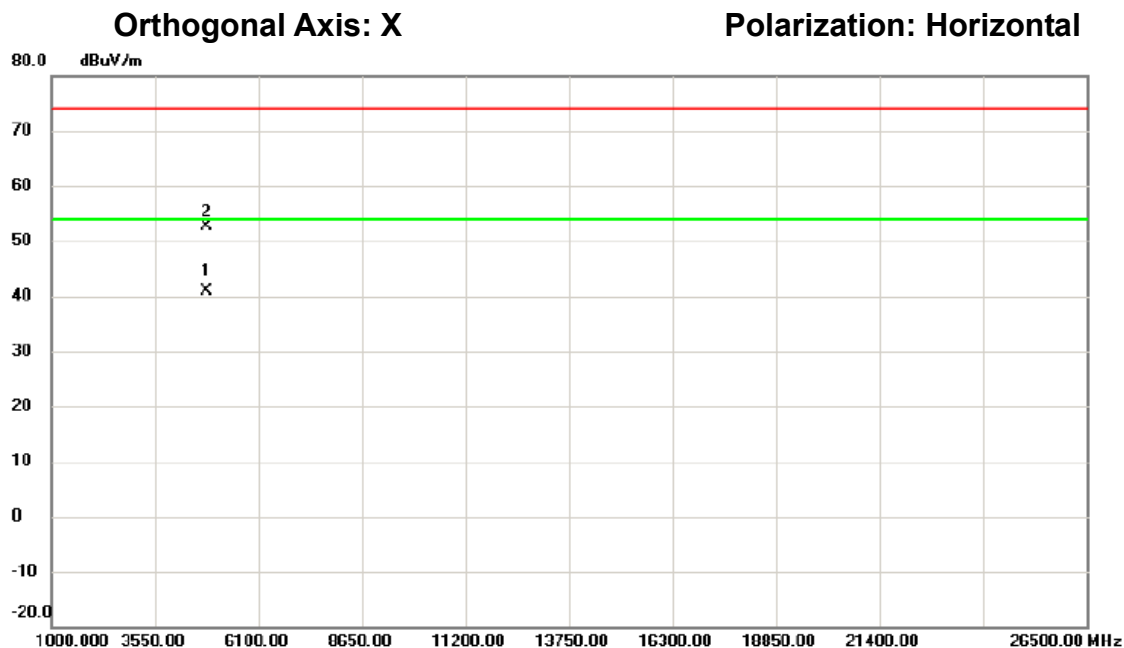

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4824.110	37.39	3.45	40.84	54.00	-13.16	AVG	
2		4826.620	49.23	3.46	52.69	74.00	-21.31	peak	

測試頻道: IEEE vht20 / 2417 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 24°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/07/19
環境濕度: 52%

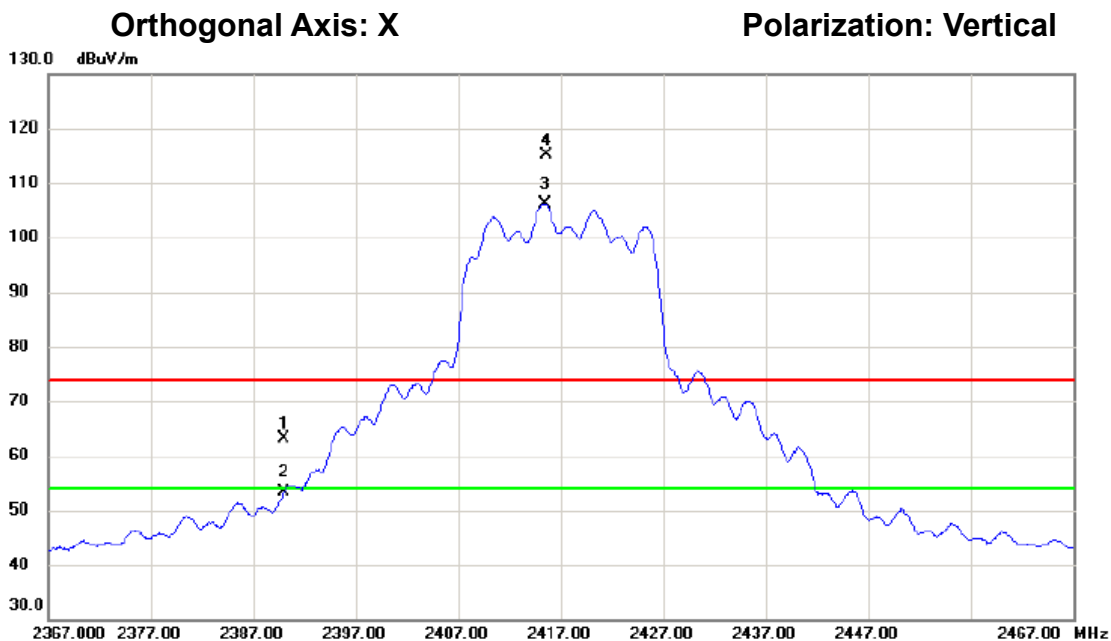

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	55.99	7.17	63.16	74.00	-10.84	peak	
2		2390.000	46.15	7.17	53.32	54.00	-0.68	AVG	
3	*	2415.450	98.98	7.25	106.23	54.00	52.23	AVG	主波訊號不予判定
4	X	2415.550	107.85	7.25	115.10	74.00	41.10	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

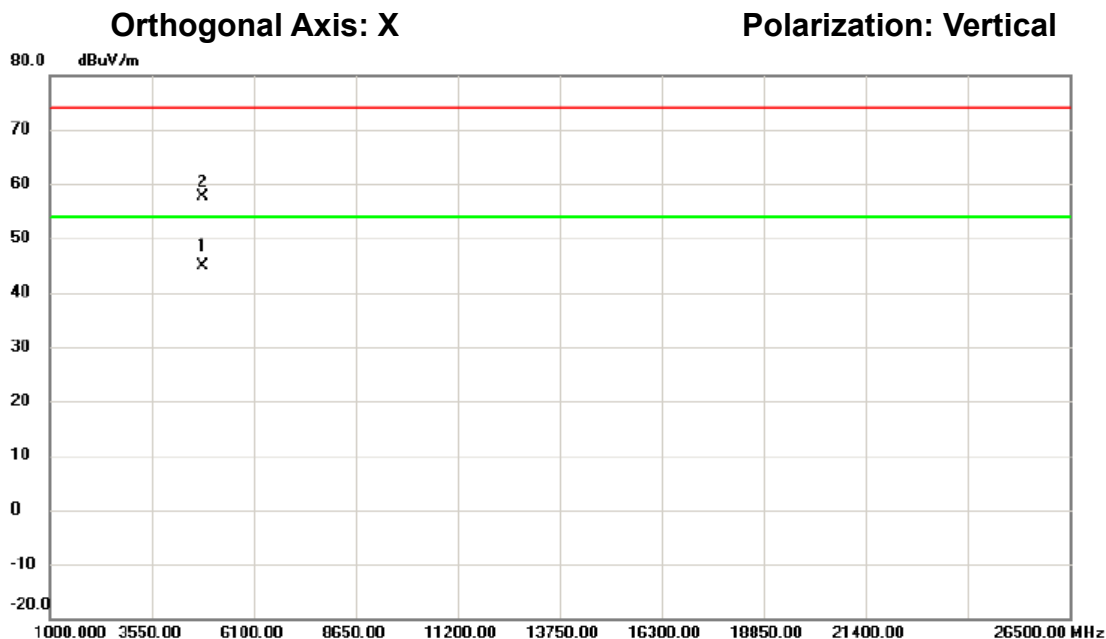


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4835.530	41.49	3.48	44.97	54.00	-9.03	AVG	
2		4837.600	54.09	3.50	57.59	74.00	-16.41	peak	

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Horizontal

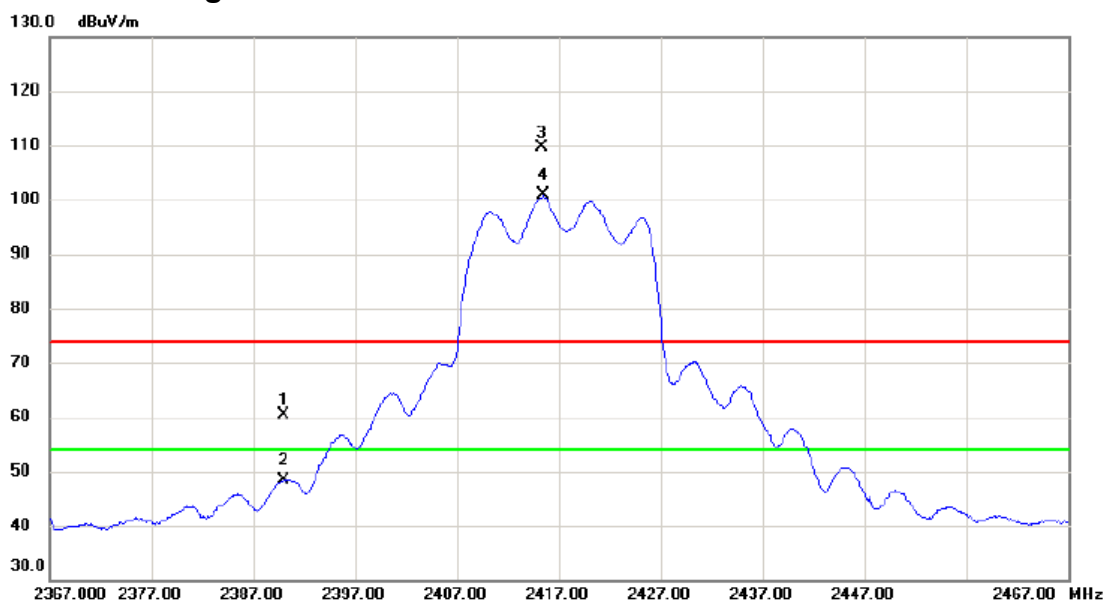

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	53.31	7.17	60.48	74.00	-13.52	peak	
2		2390.000	41.21	7.17	48.38	54.00	-5.62	AVG	
3	X	2415.300	102.46	7.25	109.71	74.00	35.71	peak	主波訊號不予判定
4	*	2415.500	93.56	7.25	100.81	54.00	46.81	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

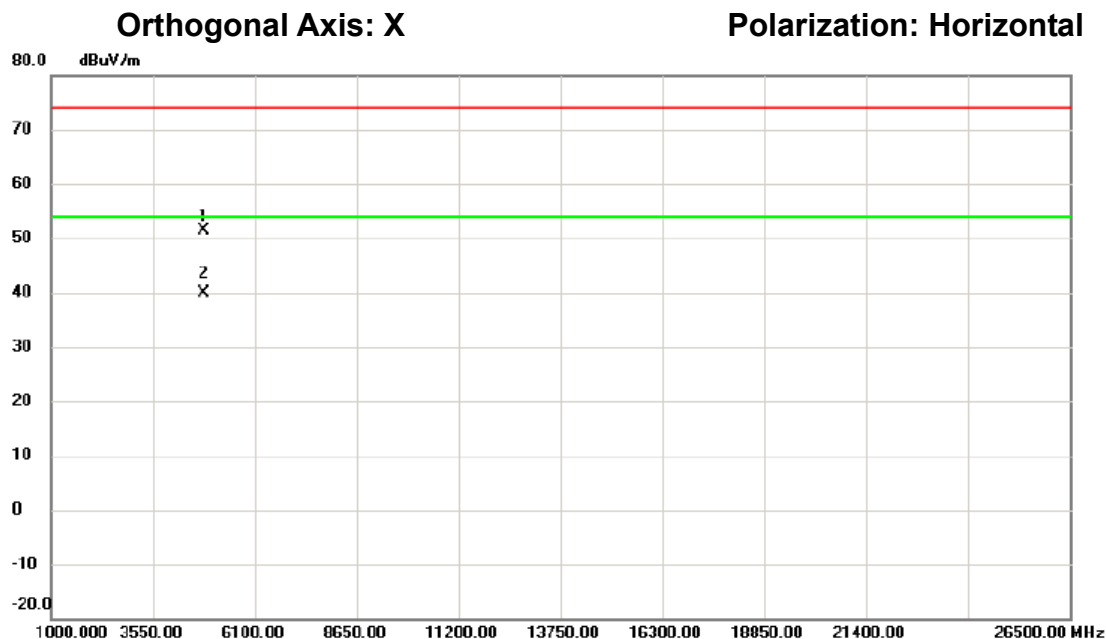

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4834.110	48.02	3.48	51.50	74.00	-22.50	peak	
2	*	4834.710	36.48	3.48	39.96	54.00	-14.04	AVG	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

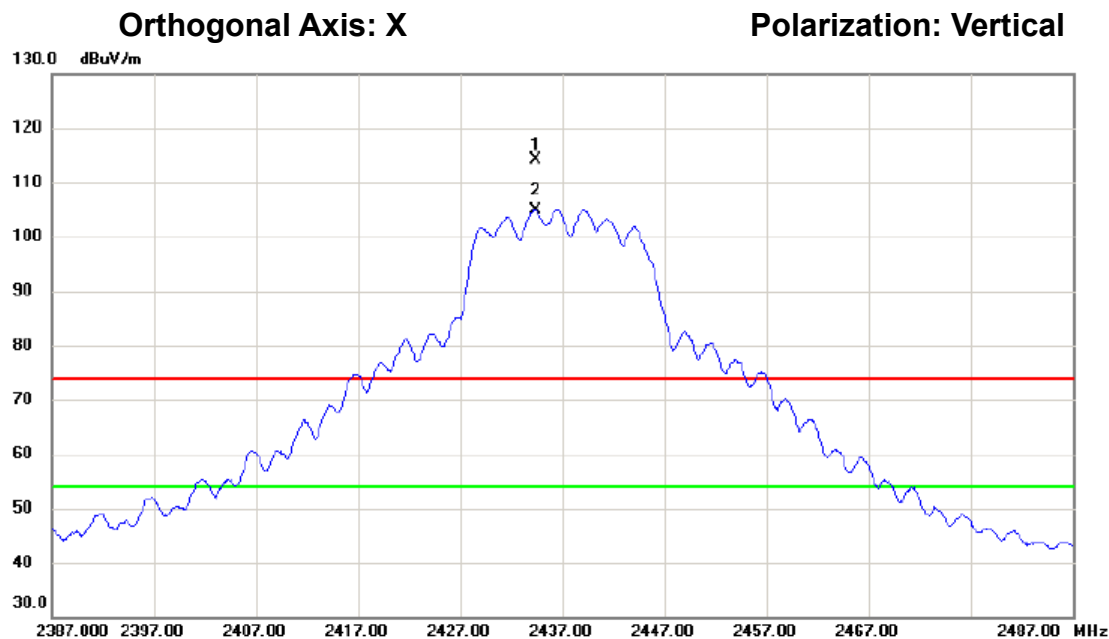

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2434.350	106.78	7.31	114.09	74.00	40.09	peak	主波訊號不予判定
2	*	2434.400	97.68	7.31	104.99	54.00	50.99	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

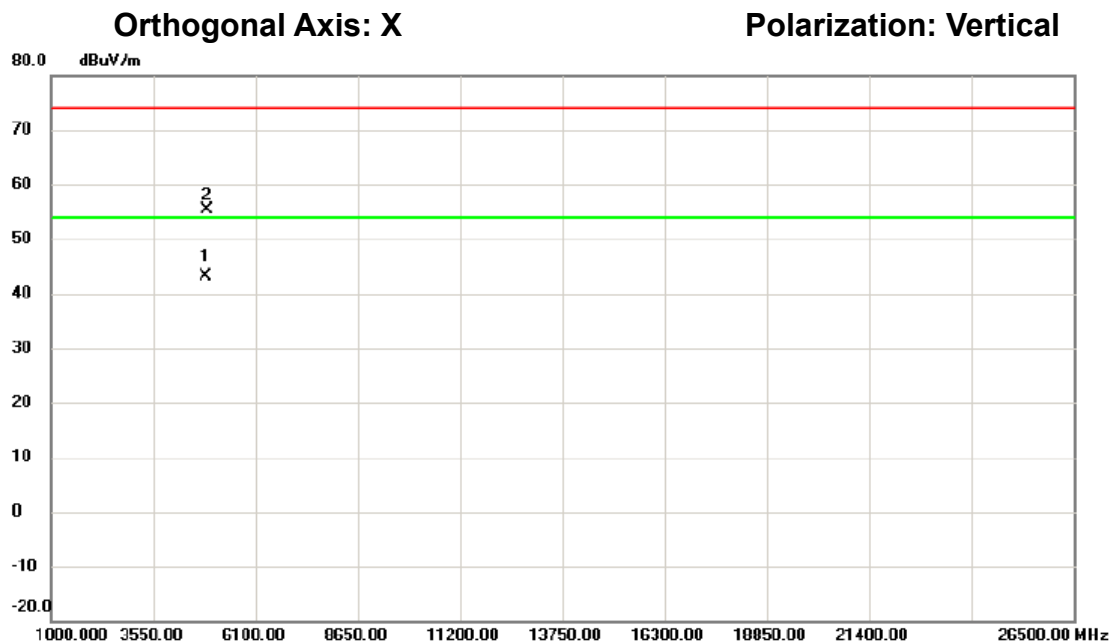

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4875.830	39.52	3.64	43.16	54.00	-10.84	AVG	
2		4877.400	51.83	3.64	55.47	74.00	-18.53	peak	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

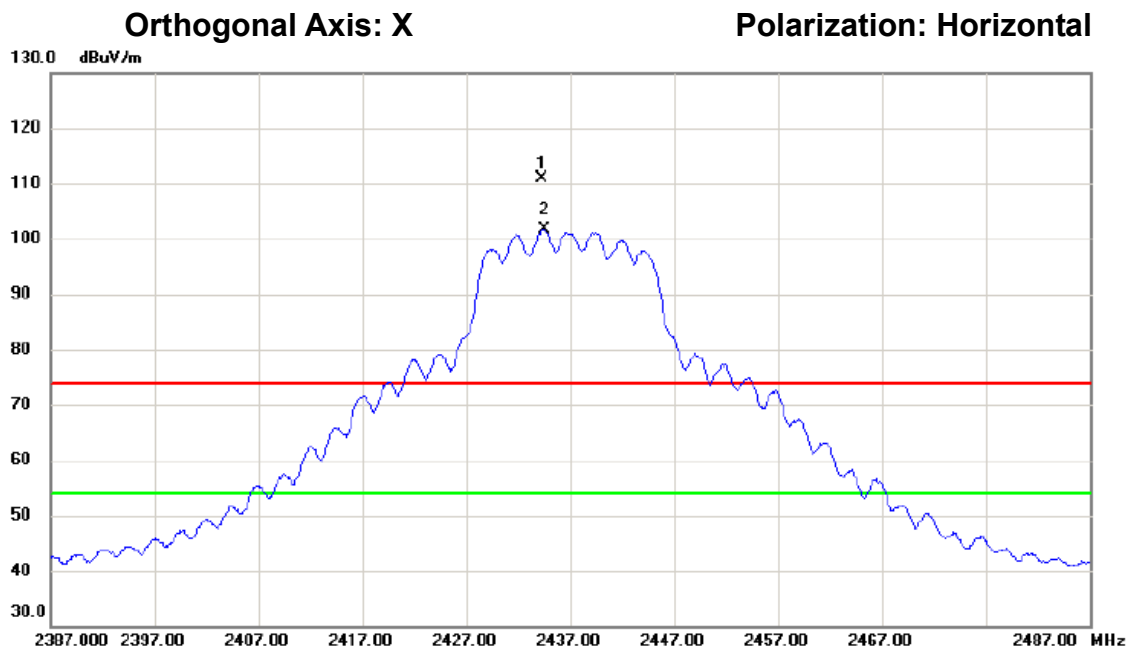

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2434.300	103.67	7.31	110.98	74.00	36.98	peak	主波訊號不予判定
2	*	2434.550	94.38	7.31	101.69	54.00	47.69	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

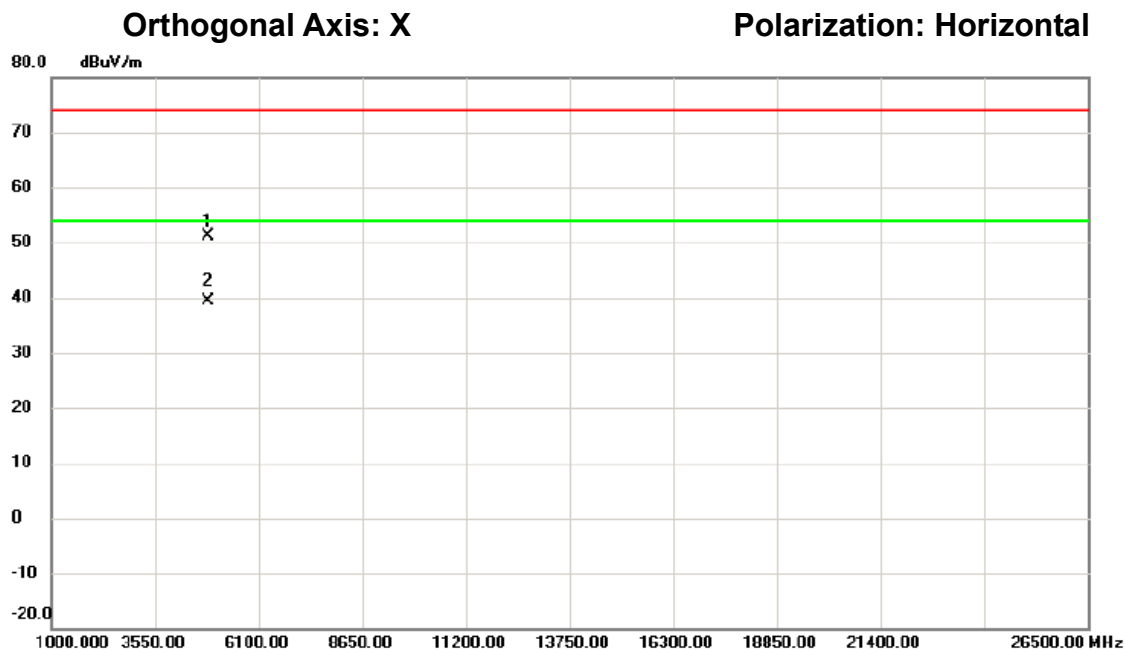

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.610	47.56	3.62	51.18	74.00	-22.82	peak	
2	*	4874.630	35.77	3.62	39.39	54.00	-14.61	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

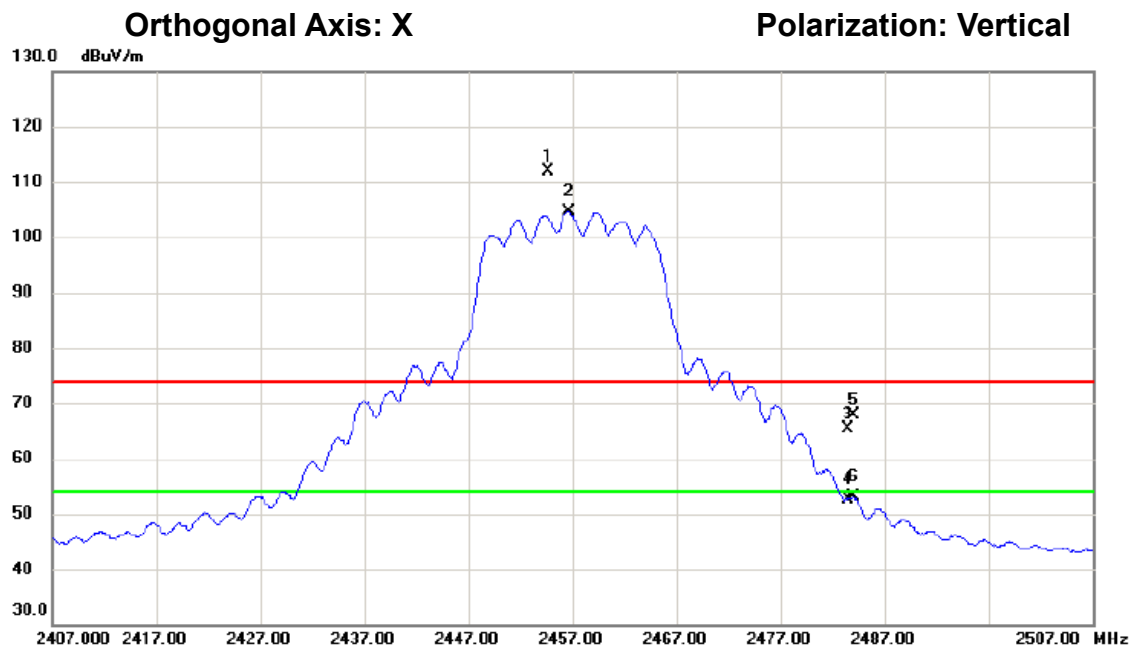

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.650	104.49	7.37	111.86	74.00	37.86	peak	主波訊號不予判定
2	*	2456.700	97.17	7.38	104.55	54.00	50.55	AVG	主波訊號不予判定
3		2483.500	58.00	7.47	65.47	74.00	-8.53	peak	
4		2483.500	45.12	7.47	52.59	54.00	-1.41	AVG	
5		2484.000	60.34	7.47	67.81	74.00	-6.19	peak	
6		2484.000	45.56	7.47	53.03	54.00	-0.97	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

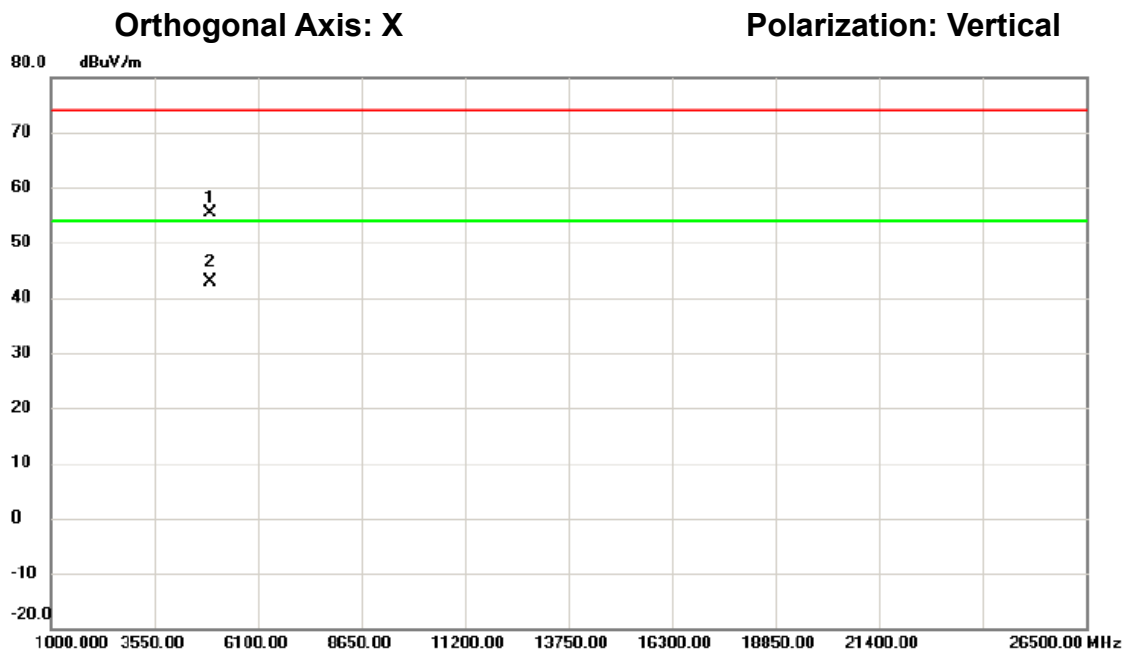

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4911.080	51.54	3.76	55.30	74.00	-18.70	peak	
2	*	4912.140	39.20	3.76	42.96	54.00	-11.04	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

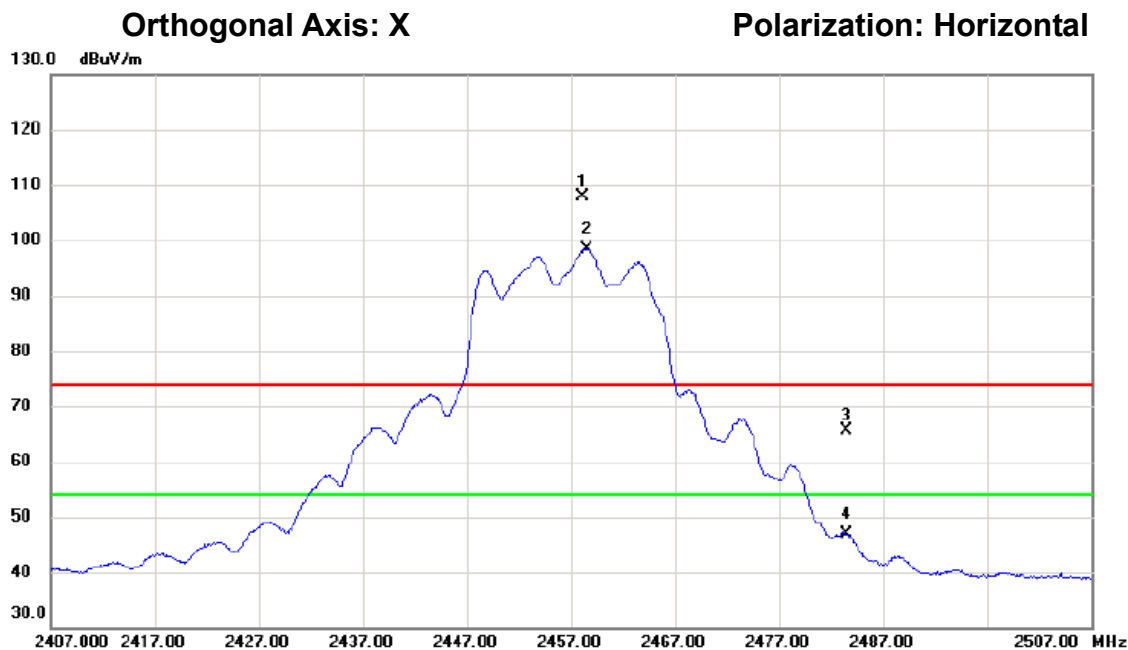

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.150	100.45	7.39	107.84	74.00	33.84	peak	主波訊號不予判定
2	*	2458.550	91.09	7.38	98.47	54.00	44.47	AVG	主波訊號不予判定
3		2483.500	58.11	7.47	65.58	74.00	-8.42	peak	
4		2483.500	39.42	7.47	46.89	54.00	-7.11	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

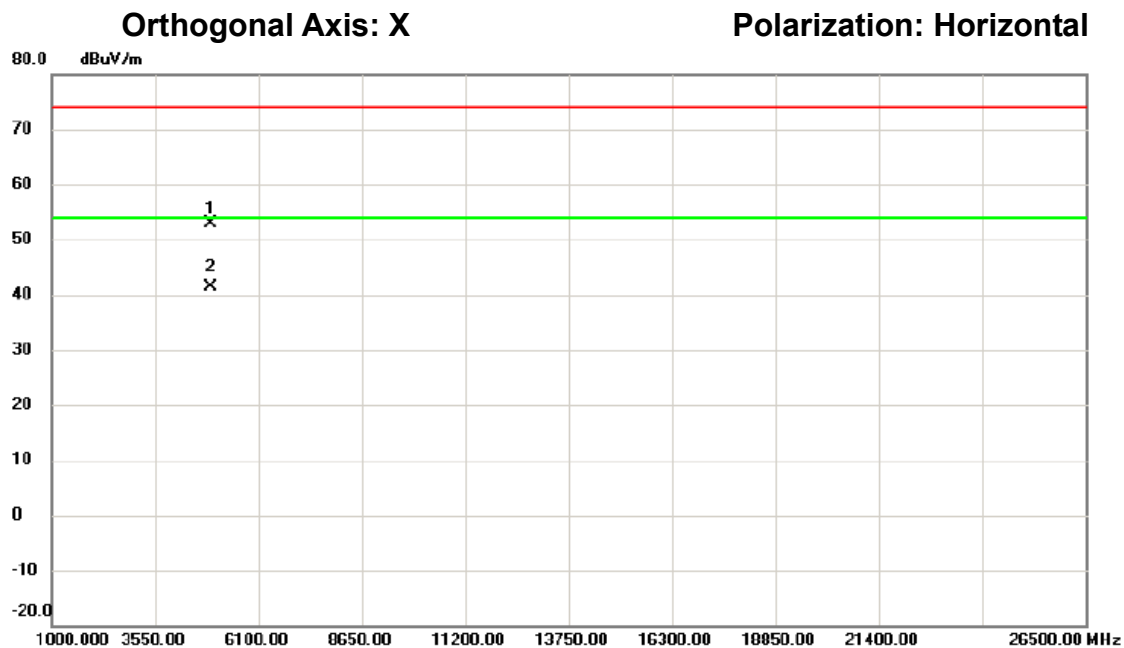

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4911.690	49.24	3.76	53.00	74.00	-21.00	peak	
2	*	4914.530	37.54	3.78	41.32	54.00	-12.68	AVG	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

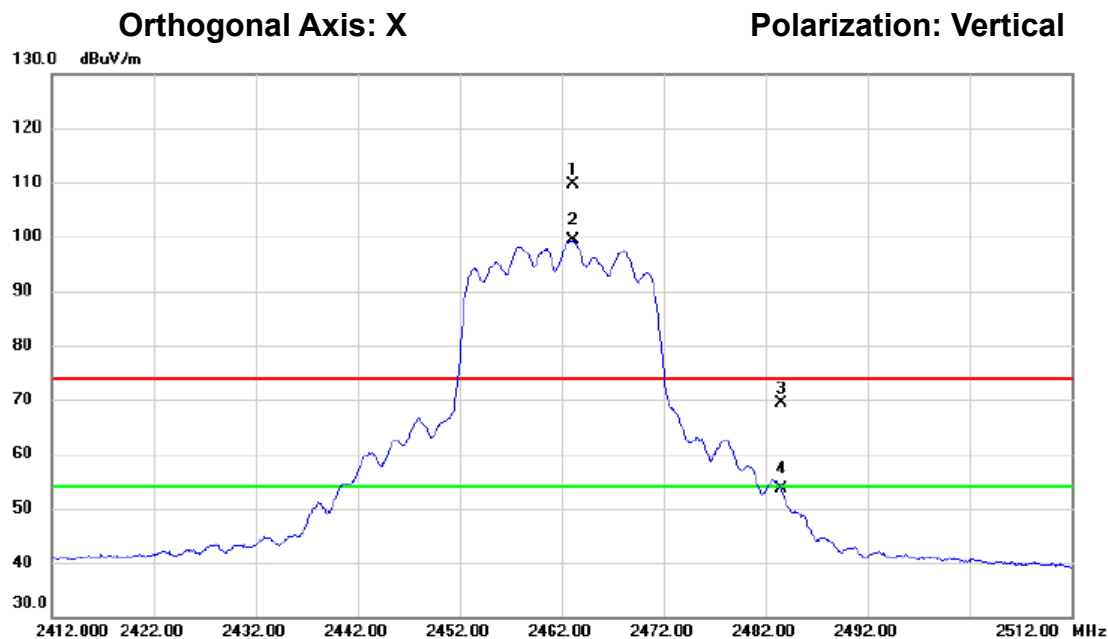

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.150	102.31	7.39	109.70	74.00	35.70	peak	主波訊號不予判定
2	*	2463.200	91.87	7.39	99.26	54.00	45.26	AVG	主波訊號不予判定
3		2483.500	61.96	7.47	69.43	74.00	-4.57	peak	
4		2483.500	46.06	7.47	53.53	54.00	-0.47	AVG	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

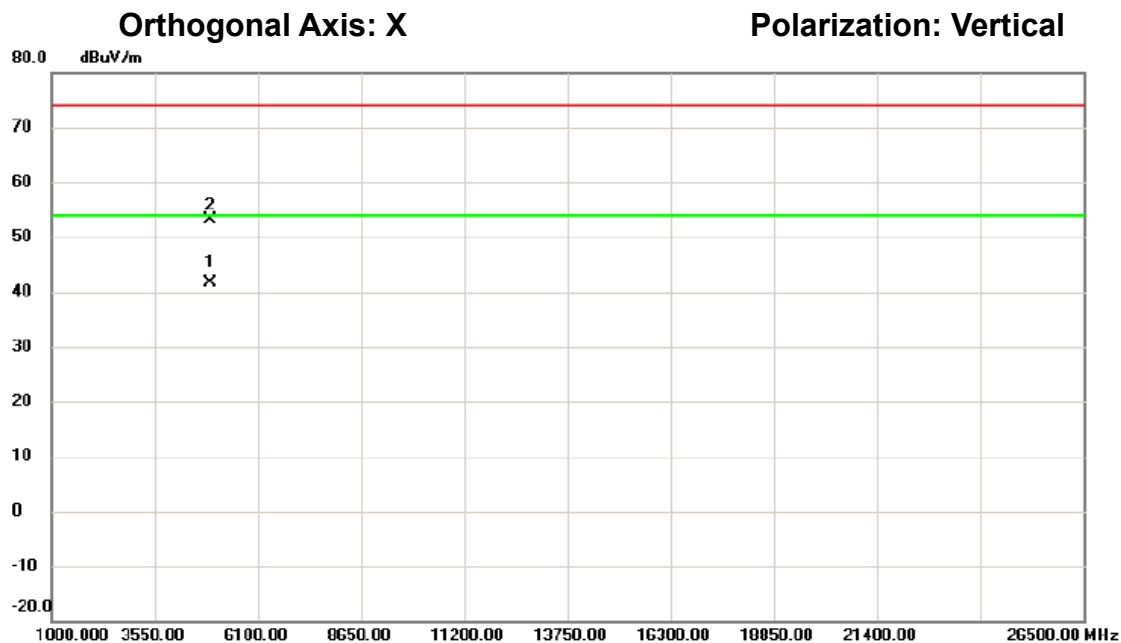

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4925.550	37.80	3.82	41.62	54.00	-12.38	AVG	
2		4926.920	49.35	3.82	53.17	74.00	-20.83	peak	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

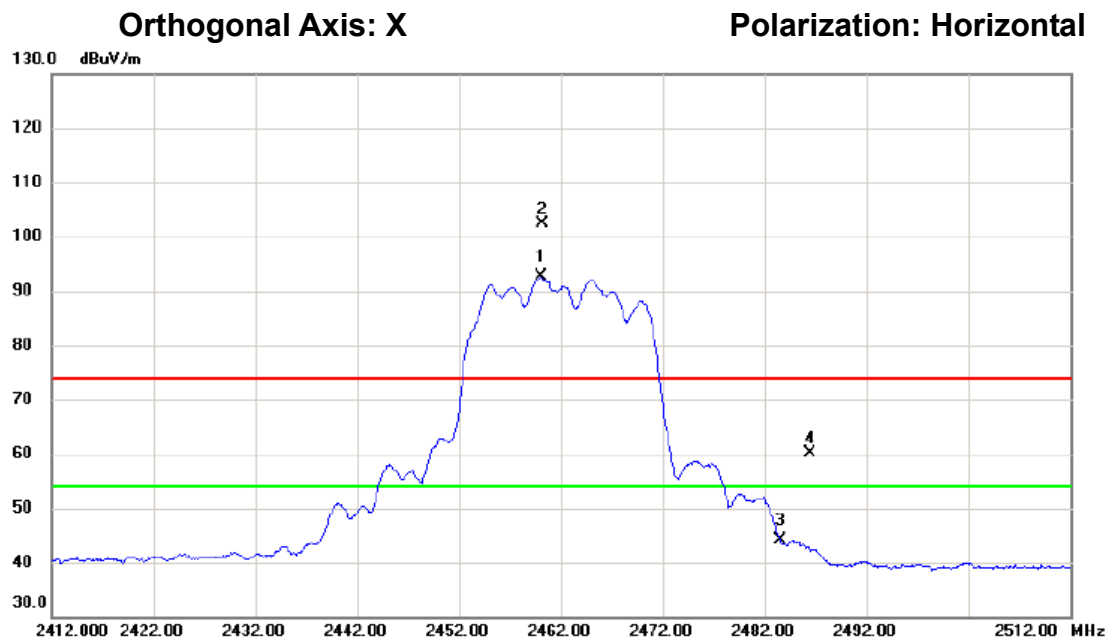

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2460.050	85.24	7.39	92.63	54.00	38.63	AVG	主波訊號不予判定
2	X	2460.150	94.93	7.39	102.32	74.00	28.32	peak	主波訊號不予判定
3		2483.500	36.75	7.47	44.22	54.00	-9.78	AVG	
4		2486.500	52.64	7.46	60.10	74.00	-13.90	peak	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

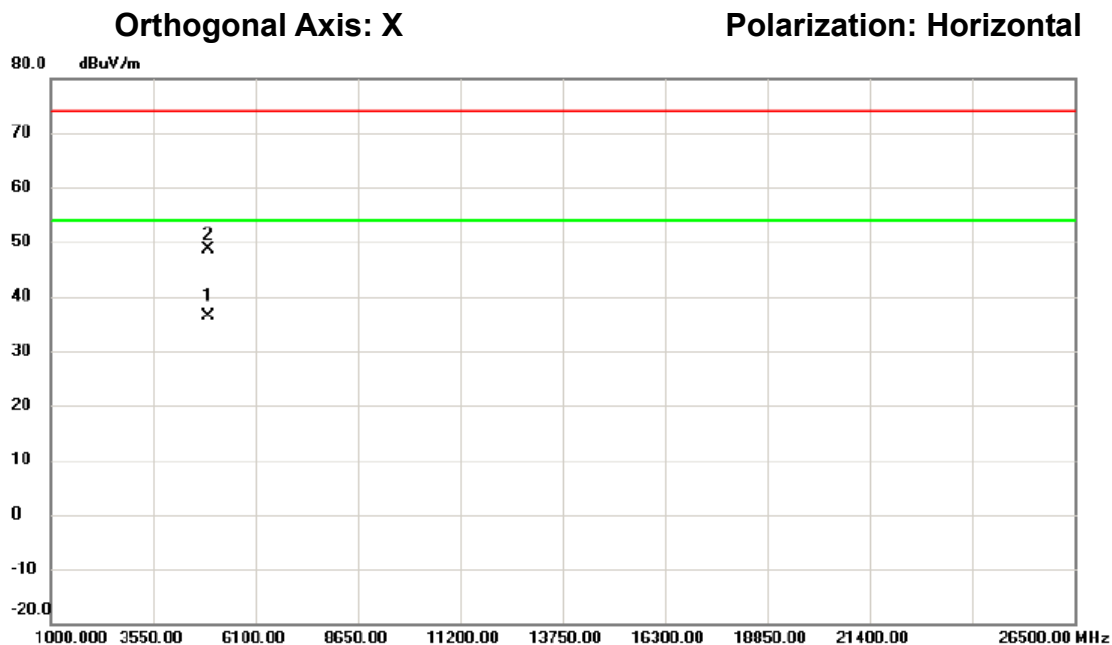


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4920.470	32.70	3.80	36.50	54.00	-17.50	AVG	
2		4923.920	44.81	3.81	48.62	74.00	-25.38	peak	

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Vertical

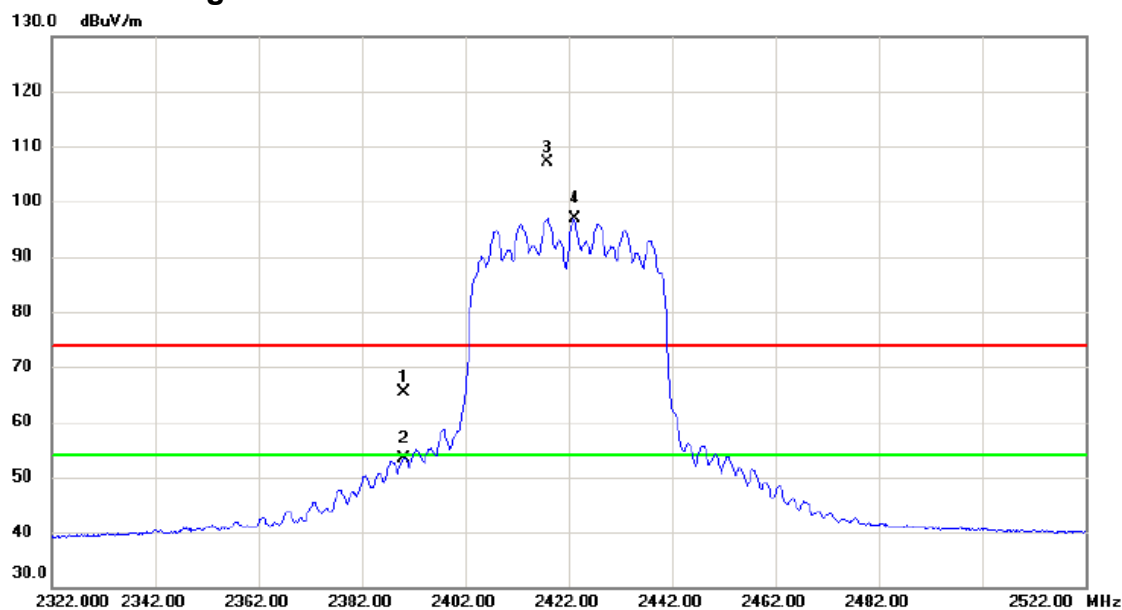

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.22	7.17	65.39	74.00	-8.61	peak	
2		2390.000	46.13	7.17	53.30	54.00	-0.70	AVG	
3	X	2417.900	99.75	7.26	107.01	74.00	33.01	peak	主波訊號不予判定
4	*	2423.100	89.61	7.28	96.89	54.00	42.89	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

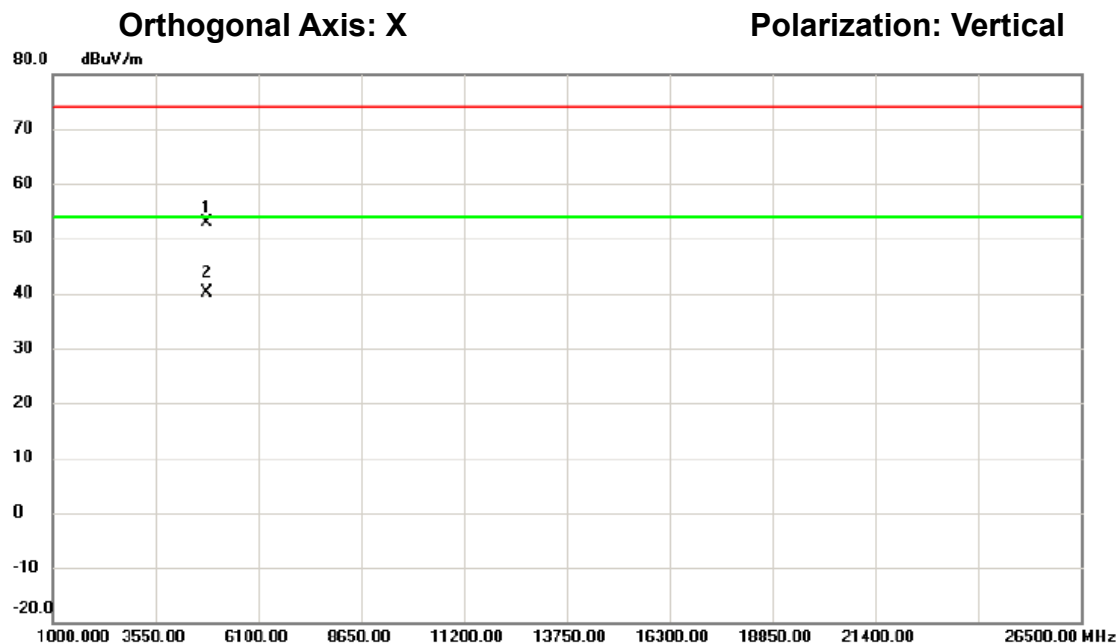

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4837.830	49.48	3.50	52.98	74.00	-21.02	peak	
2	*	4840.080	36.54	3.50	40.04	54.00	-13.96	AVG	

測試頻道: IEEE vht40 / 2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/07/19


環境濕度: 52%

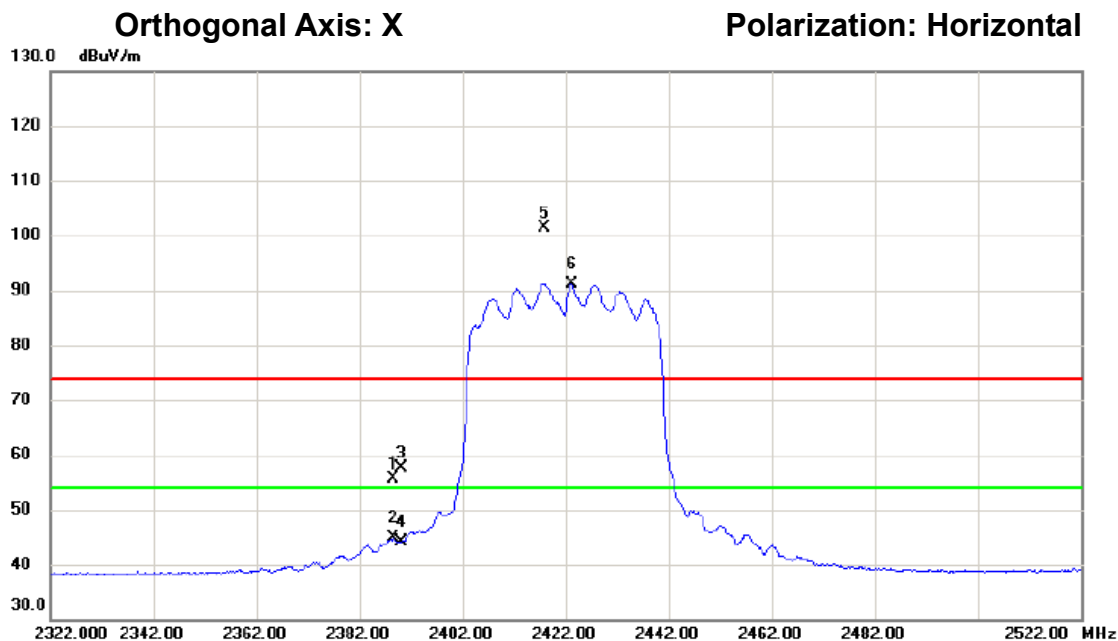

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.600	48.46	7.17	55.63	74.00	-18.37	peak	
2		2388.600	37.78	7.17	44.95	54.00	-9.05	AVG	
3		2390.000	50.47	7.17	57.64	74.00	-16.36	peak	
4		2390.000	36.85	7.17	44.02	54.00	-9.98	AVG	
5	X	2417.800	94.06	7.26	101.32	74.00	27.32	peak	主波訊號不予判定
6	*	2423.300	83.86	7.28	91.14	54.00	37.14	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

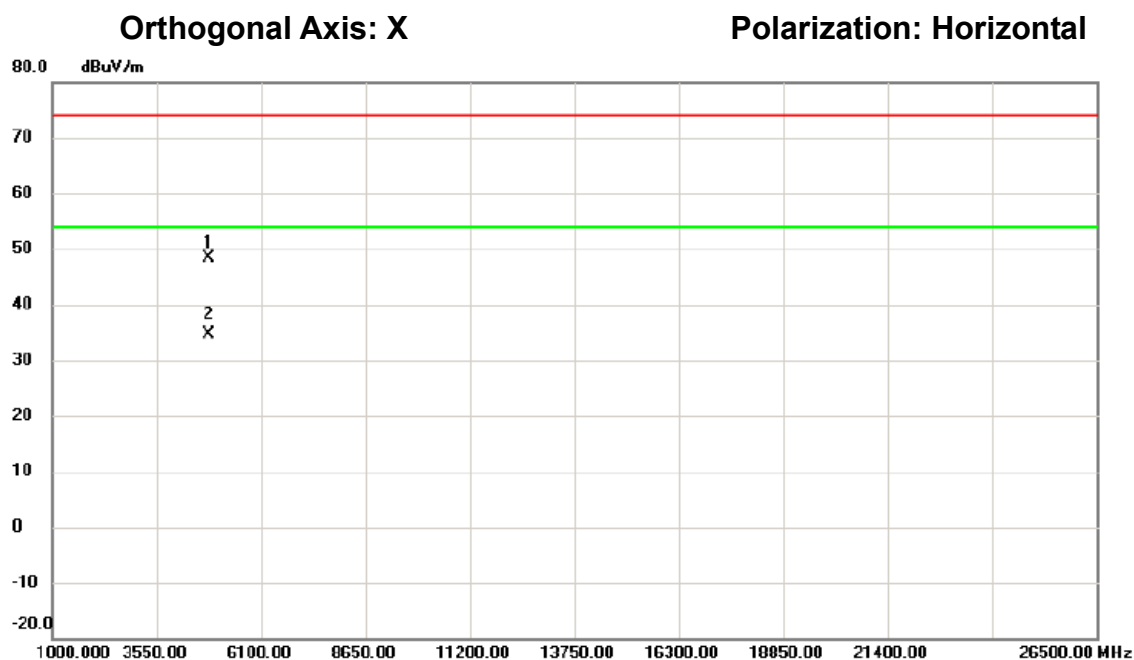


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4837.830	44.95	3.50	48.45	74.00	-25.55	peak	
2 *	4838.240	31.24	3.50	34.74	54.00	-19.26	AVG	

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Vertical

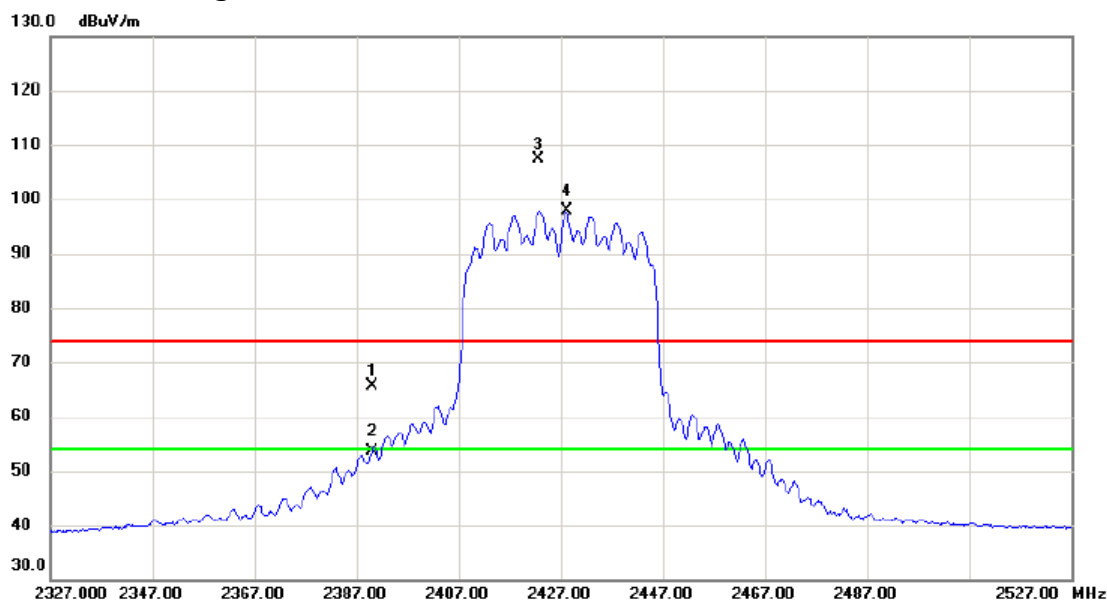

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.35	7.17	65.52	74.00	-8.48	peak	
2		2390.000	46.45	7.17	53.62	54.00	-0.38	AVG	
3	X	2422.700	100.20	7.28	107.48	74.00	33.48	peak	主波訊號不予判定
4	*	2428.100	90.49	7.29	97.78	54.00	43.78	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

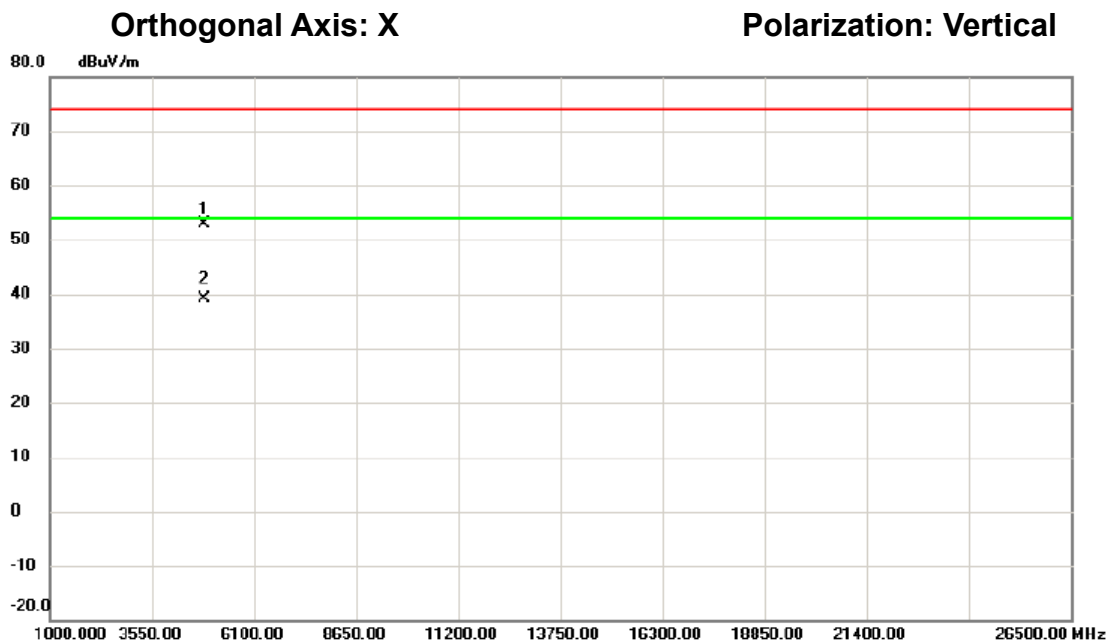

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4848.540	49.45	3.54	52.99	74.00	-21.01	peak	
2	*	4848.560	35.63	3.54	39.17	54.00	-14.83	AVG	

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

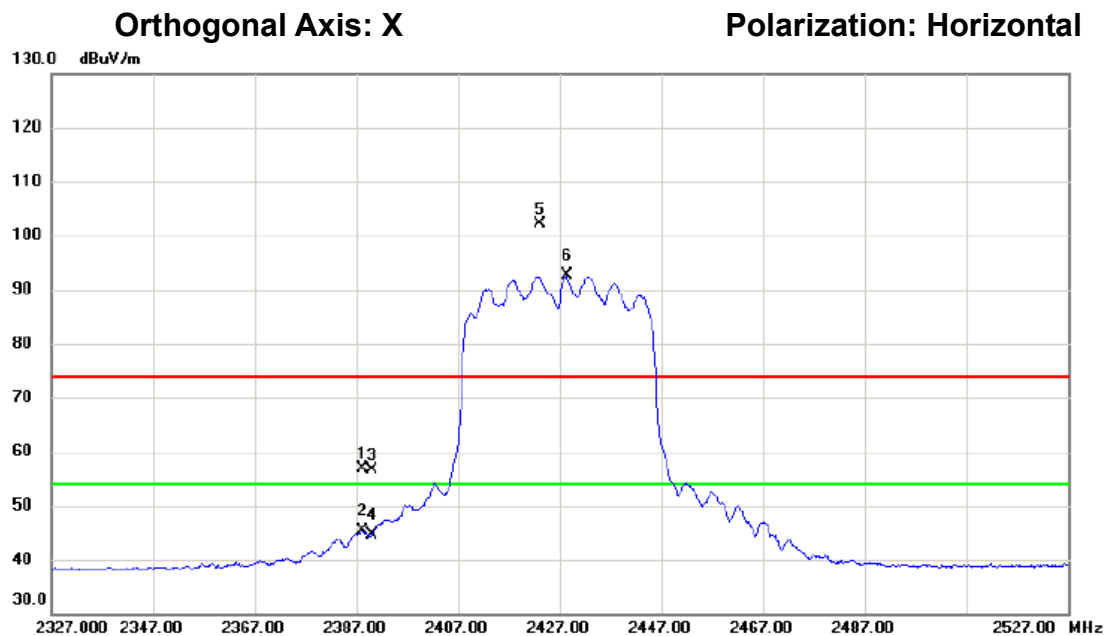

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.300	49.70	7.17	56.87	74.00	-17.13	peak	
2		2388.300	38.11	7.17	45.28	54.00	-8.72	AVG	
3		2390.000	49.51	7.17	56.68	74.00	-17.32	peak	
4		2390.000	37.41	7.17	44.58	54.00	-9.42	AVG	
5	X	2423.000	94.91	7.28	102.19	74.00	28.19	peak	主波訊號不予判定
6	*	2428.400	85.34	7.29	92.63	54.00	38.63	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

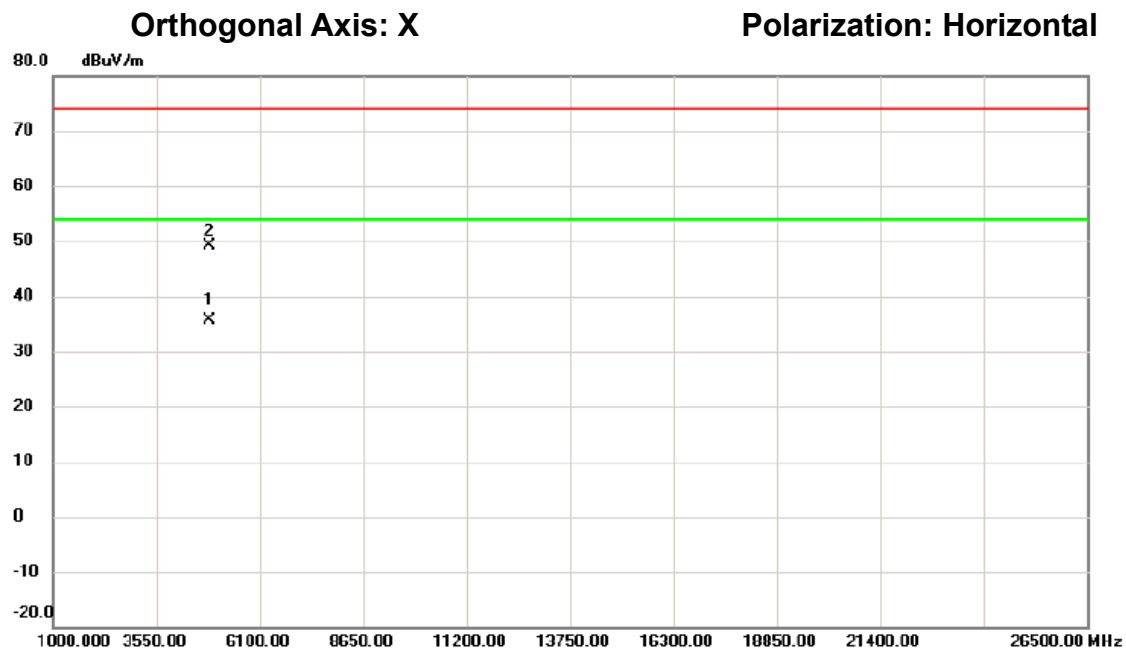


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4844.940	32.05	3.53	35.58	54.00	-18.42	AVG	
2		4847.880	45.49	3.53	49.02	74.00	-24.98	peak	

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Vertical

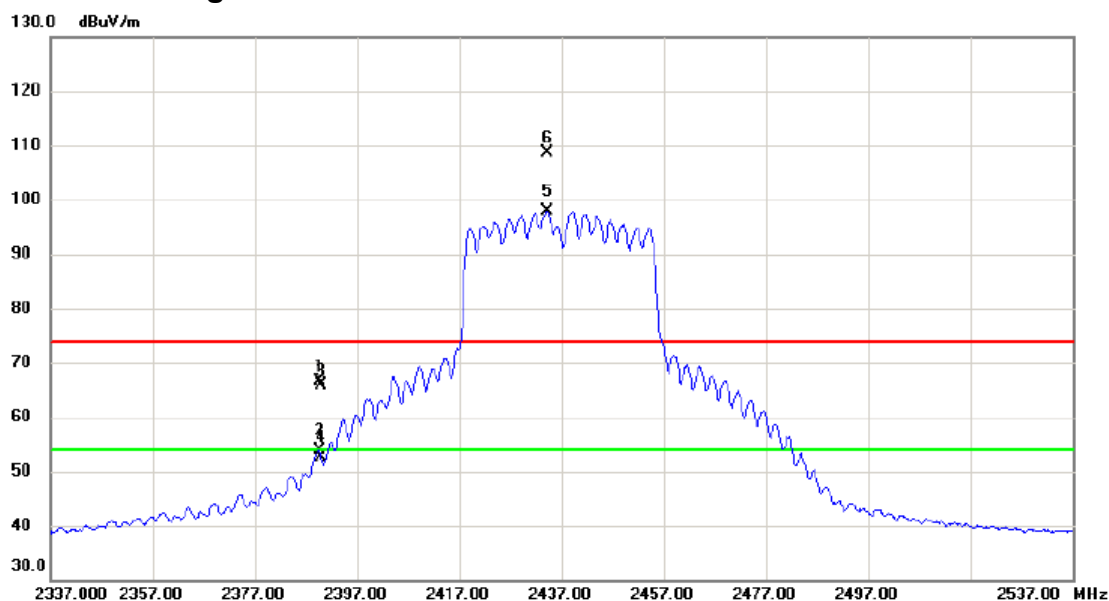

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.700	59.53	7.17	66.70	74.00	-7.30	peak	
2		2389.700	46.67	7.17	53.84	54.00	-0.16	AVG	
3		2390.000	58.80	7.17	65.97	74.00	-8.03	peak	
4		2390.000	45.57	7.17	52.74	54.00	-1.26	AVG	
5	*	2434.200	90.60	7.31	97.91	54.00	43.91	AVG	主波訊號不予判定
6	X	2434.300	101.27	7.31	108.58	74.00	34.58	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

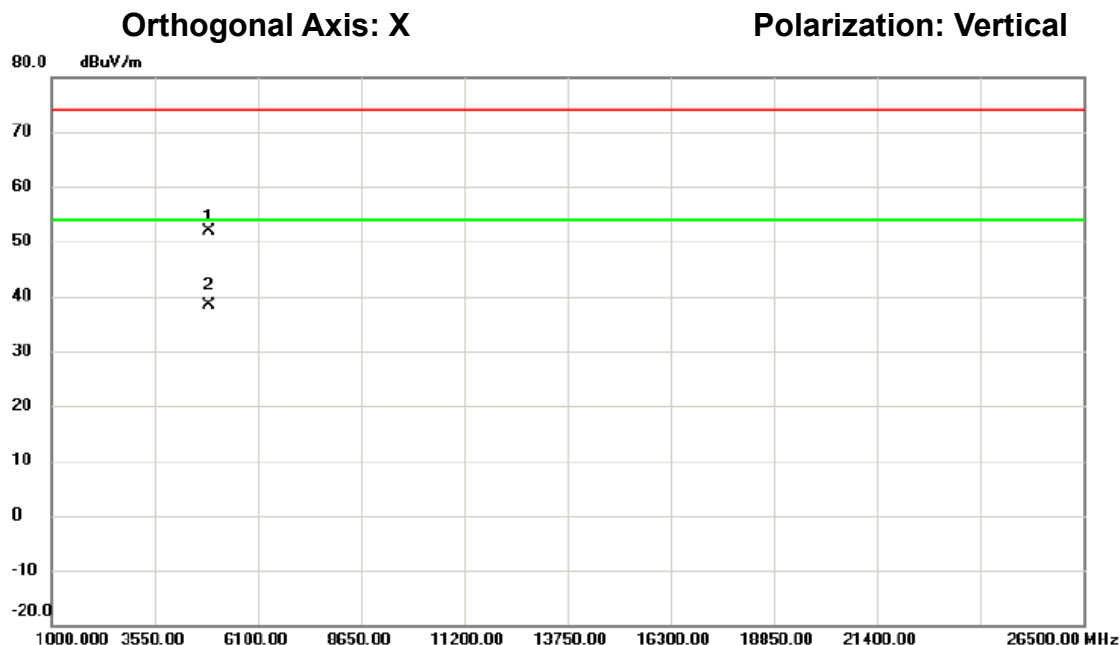

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4877.390	48.31	3.64	51.95	74.00	-22.05	peak	
2	*	4881.300	34.60	3.66	38.26	54.00	-15.74	AVG	

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

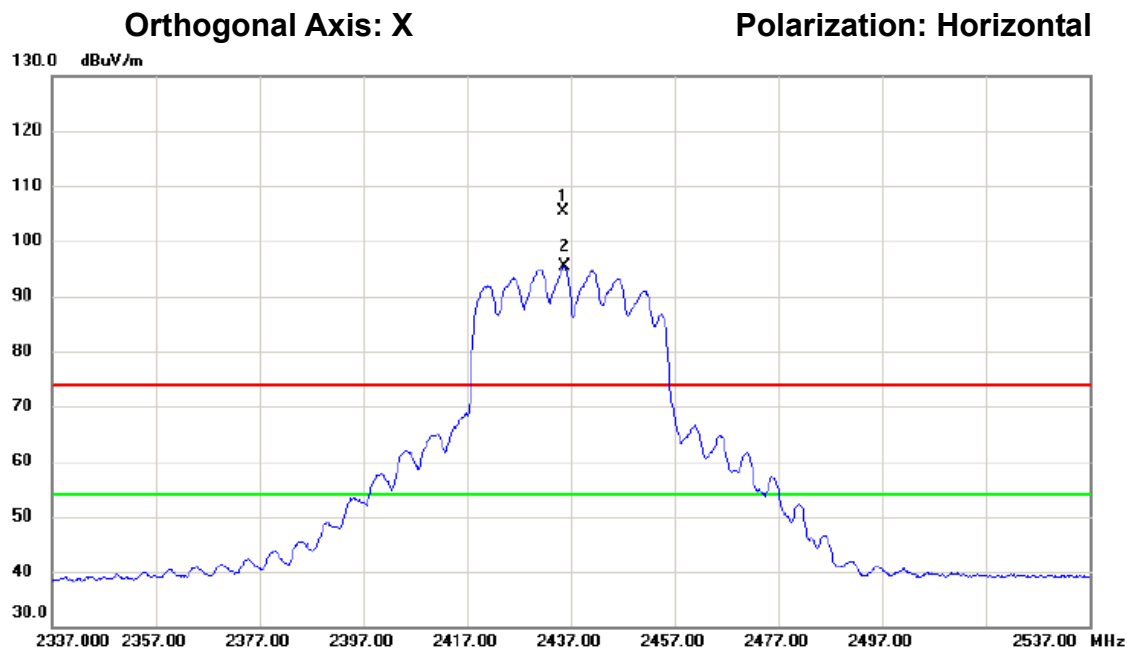

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2435.600	98.04	7.31	105.35	74.00	31.35	peak	主波訊號不予判定
2	*	2435.800	88.03	7.31	95.34	54.00	41.34	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

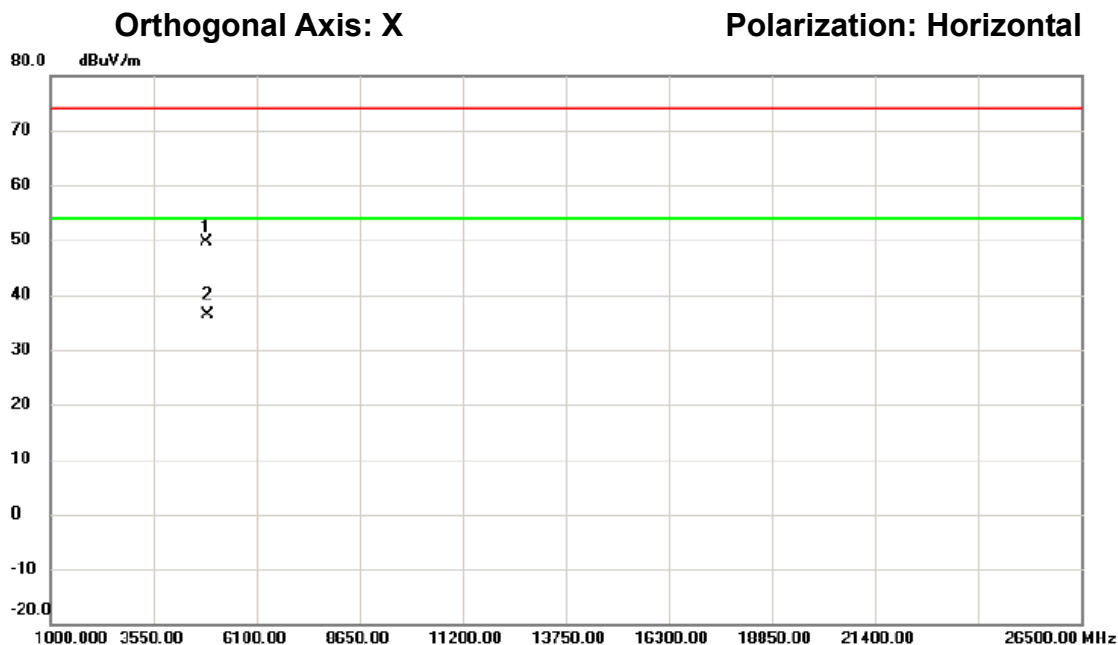

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4873.070	45.93	3.62	49.55	74.00	-24.45	peak	
2	*	4881.460	32.79	3.66	36.45	54.00	-17.55	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

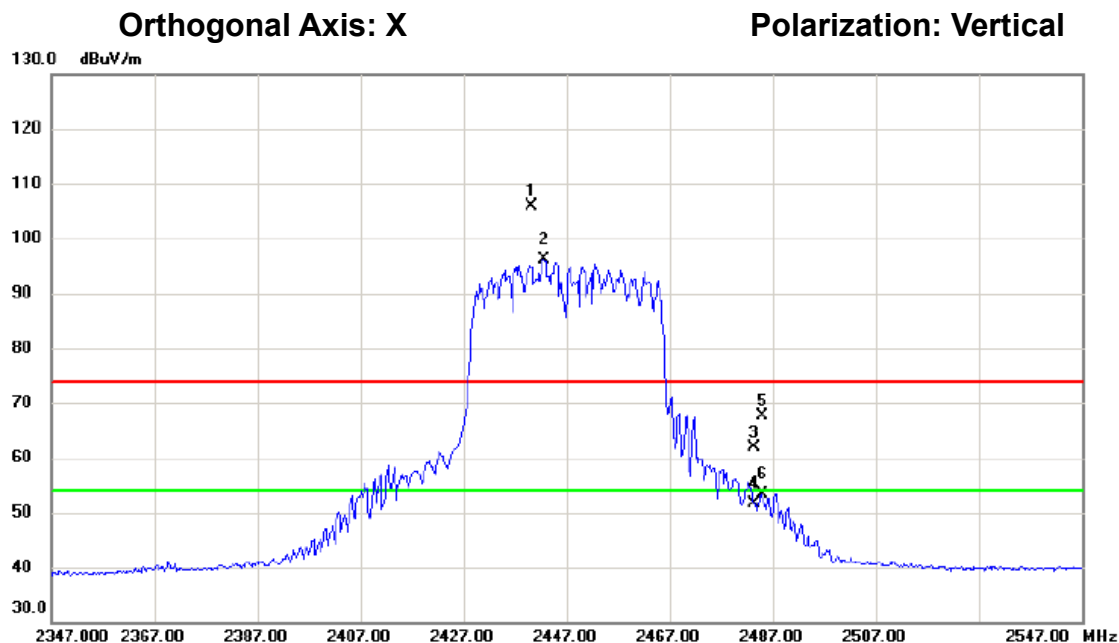

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2440.200	98.44	7.32	105.76	74.00	31.76	peak	主波訊號不予判定
2	*	2442.600	88.90	7.33	96.23	54.00	42.23	AVG	主波訊號不予判定
3		2483.500	54.51	7.47	61.98	74.00	-12.02	peak	
4		2483.500	44.14	7.47	51.61	54.00	-2.39	AVG	
5		2484.900	60.08	7.47	67.55	74.00	-6.45	peak	
6		2484.900	45.92	7.47	53.39	54.00	-0.61	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

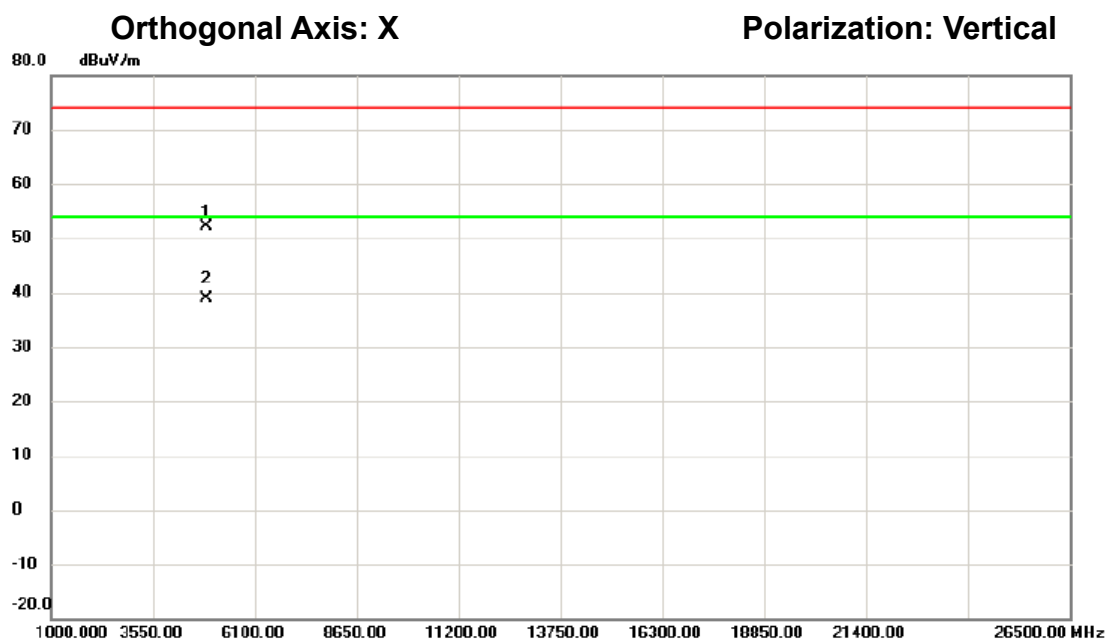


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4885.400	48.55	3.67	52.22	74.00	-21.78	peak	
2	*	4888.100	35.18	3.68	38.86	54.00	-15.14	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Horizontal

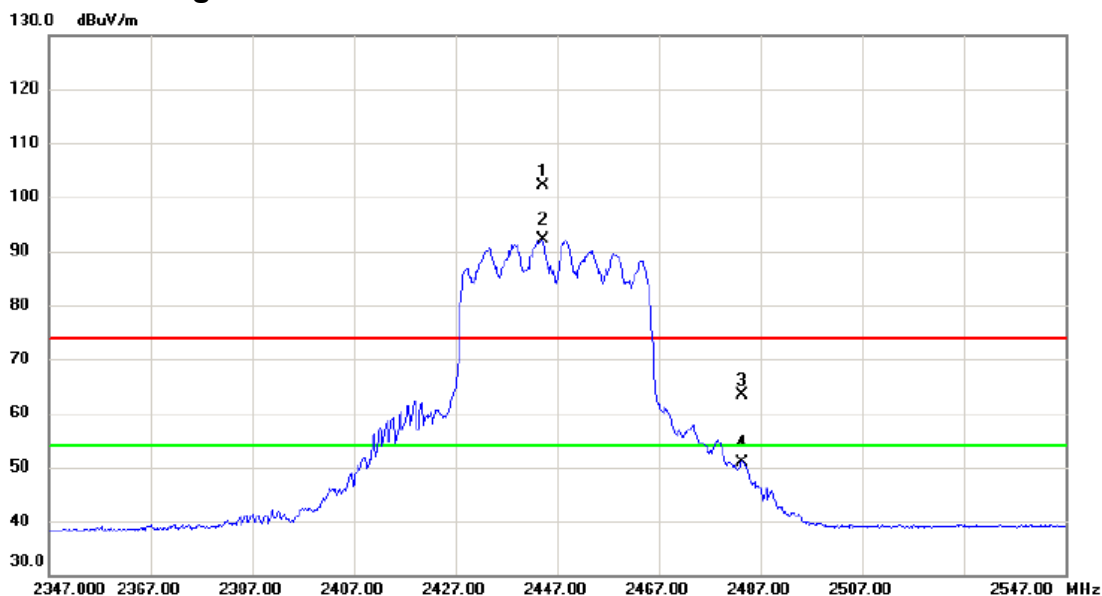

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2444.100	94.80	7.33	102.13	74.00	28.13	peak	主波訊號不予判定
2	*	2444.100	84.71	7.33	92.04	54.00	38.04	AVG	主波訊號不予判定
3		2483.500	55.94	7.47	63.41	74.00	-10.59	peak	
4		2483.500	43.32	7.47	50.79	54.00	-3.21	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

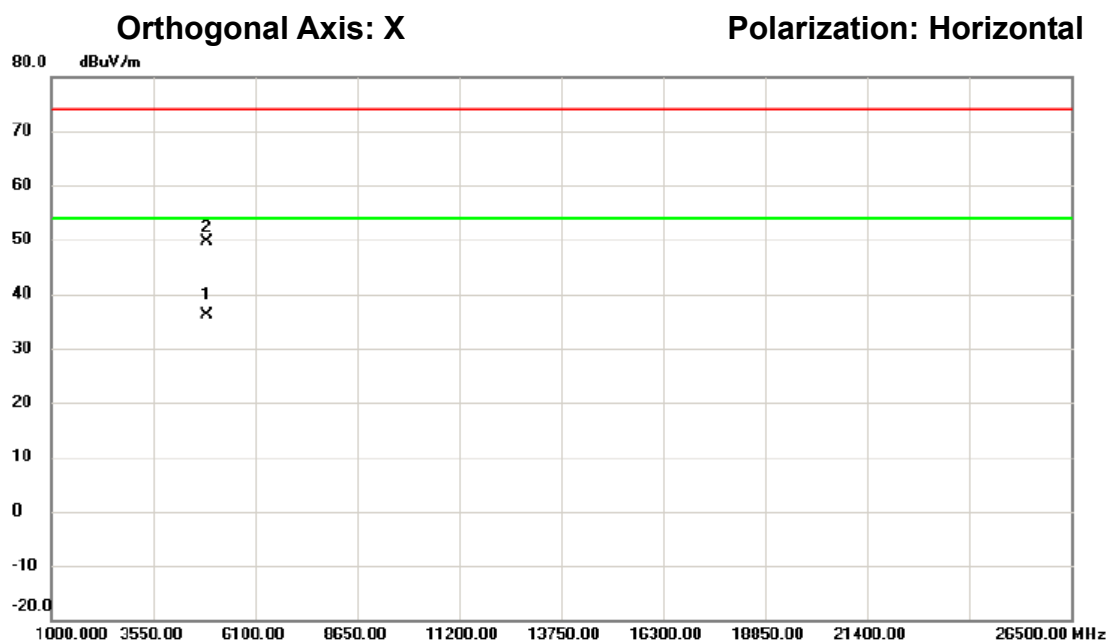

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4893.000	32.41	3.69	36.10	54.00	-17.90	AVG	
2		4894.650	46.00	3.71	49.71	74.00	-24.29	peak	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

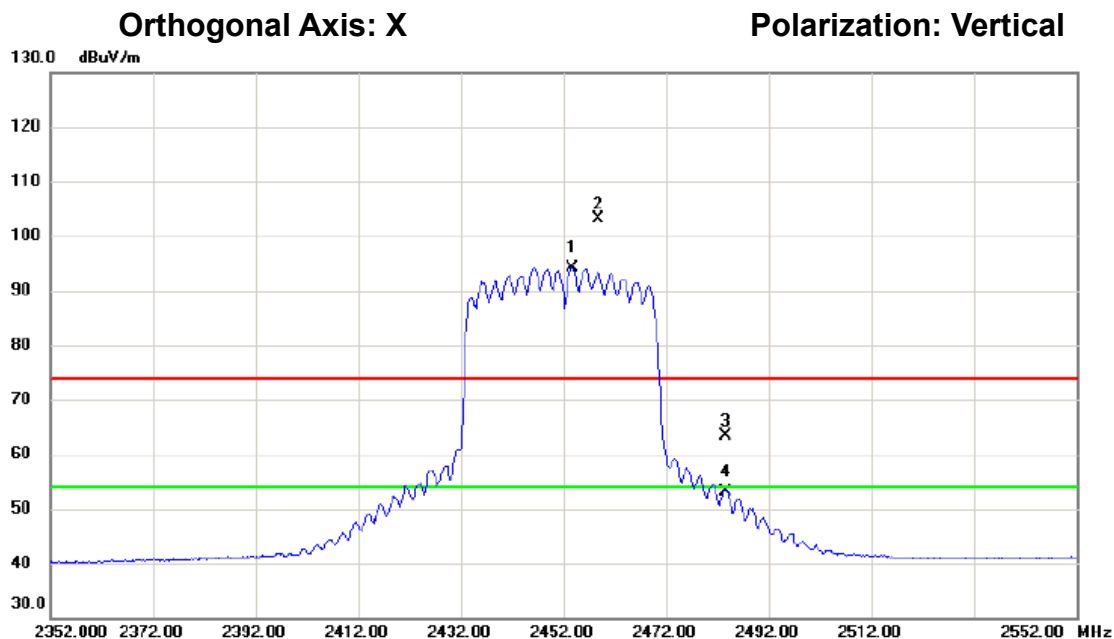

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.800	86.88	7.37	94.25	54.00	40.25	AVG	主波訊號不予判定
2	X	2458.700	95.78	7.38	103.16	74.00	29.16	peak	主波訊號不予判定
3		2483.500	55.86	7.47	63.33	74.00	-10.67	peak	
4		2483.500	45.78	7.47	53.25	54.00	-0.75	AVG	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

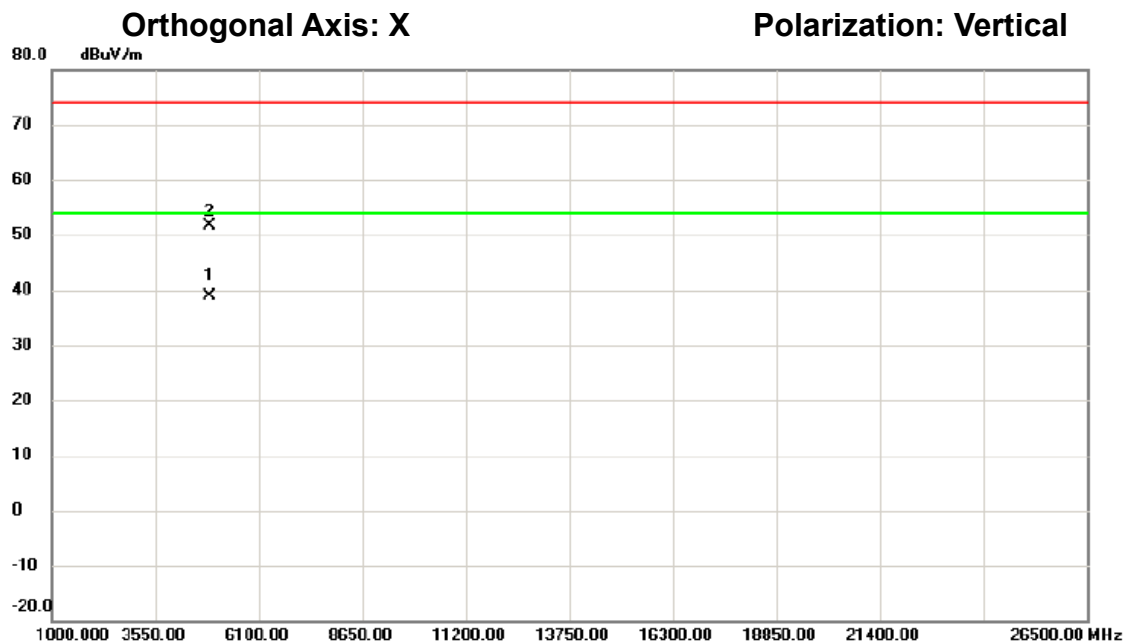

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4897.960	35.18	3.71	38.89	54.00	-15.11	AVG	
2		4900.370	47.80	3.73	51.53	74.00	-22.47	peak	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

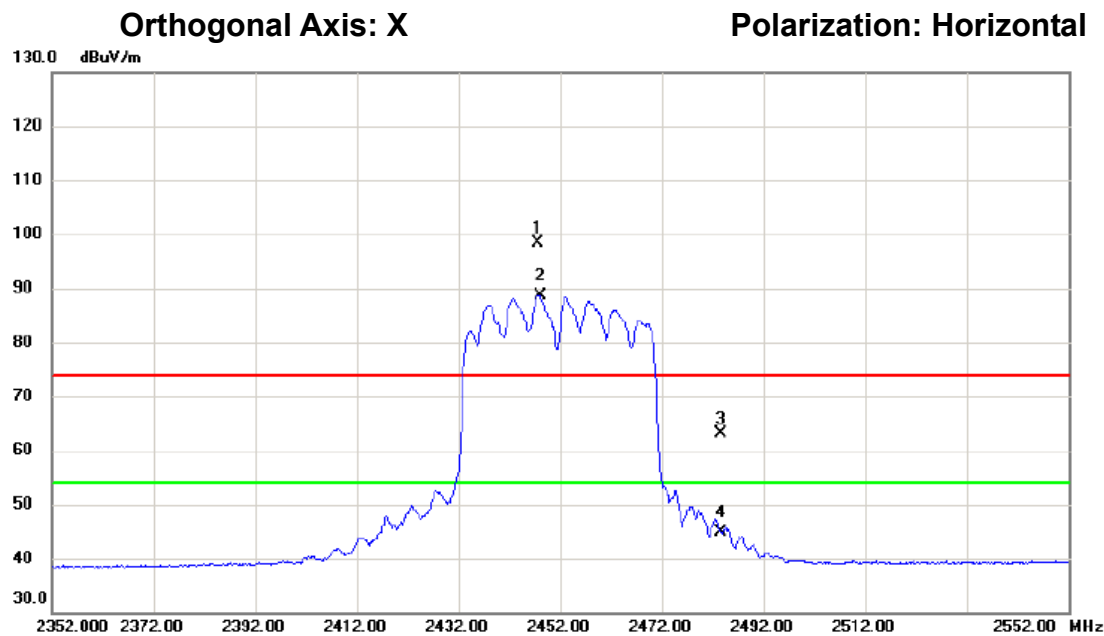

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2447.700	91.10	7.35	98.45	74.00	24.45	peak	主波訊號不予判定
2	*	2448.100	81.36	7.36	88.72	54.00	34.72	AVG	主波訊號不予判定
3		2483.500	55.78	7.47	63.25	74.00	-10.75	peak	
4		2483.500	37.37	7.47	44.84	54.00	-9.16	AVG	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

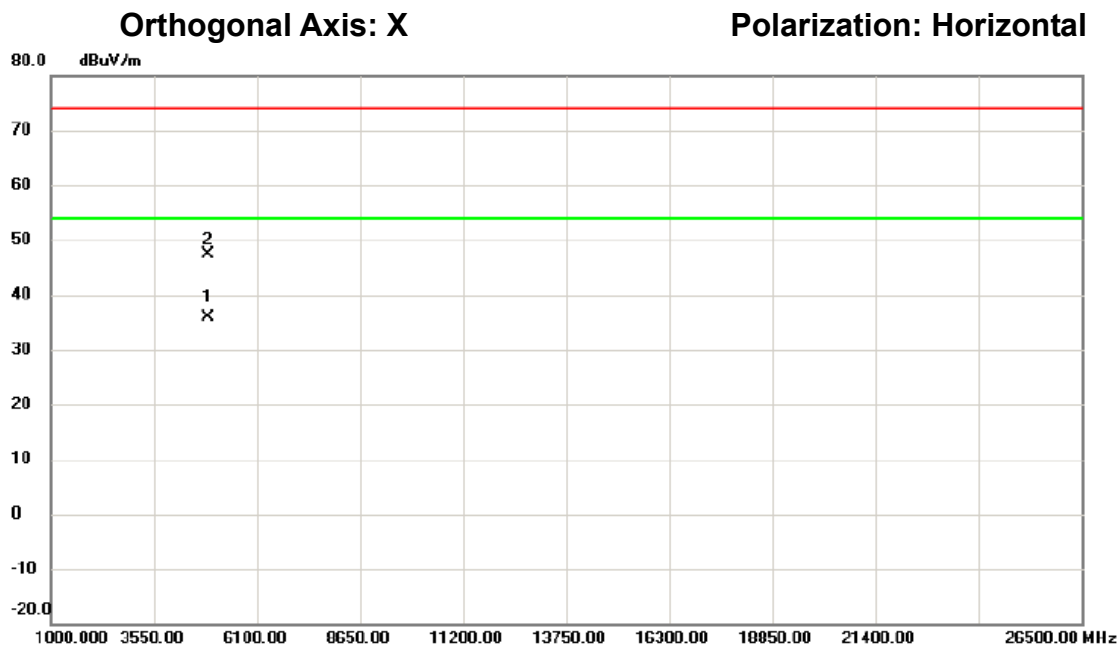

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4896.770	32.28	3.71	35.99	54.00	-18.01	AVG	
2		4907.090	43.72	3.75	47.47	74.00	-26.53	peak	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 接收
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

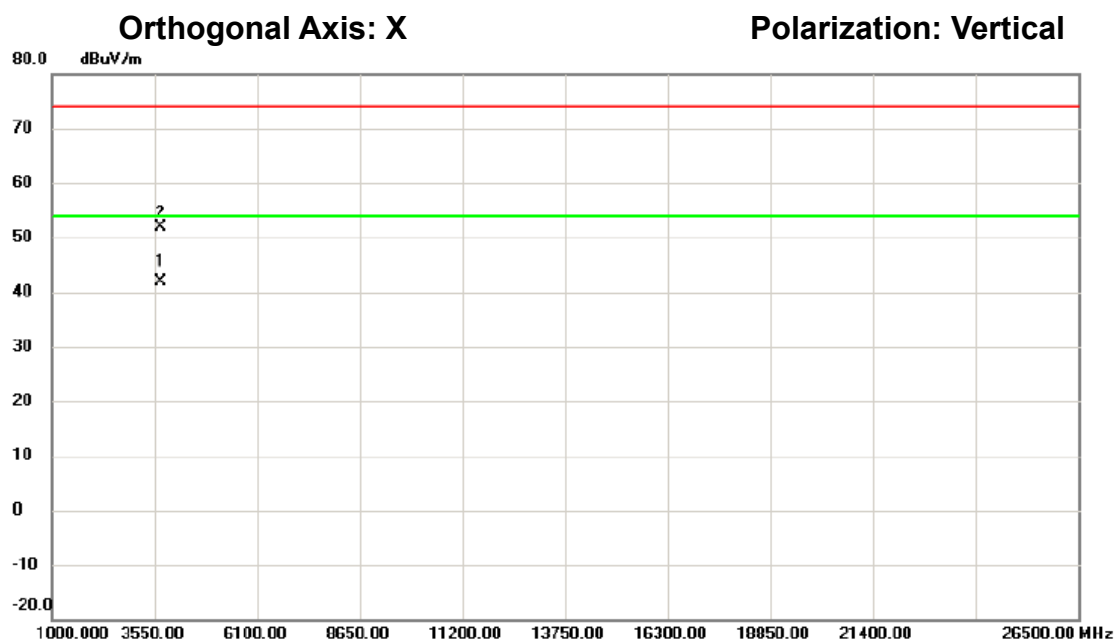

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	3711.250	41.35	0.55	41.90	54.00	-12.10	AVG	
2		3711.540	51.32	0.55	51.87	74.00	-22.13	peak	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 接收
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/07/19
 環境濕度: 52%

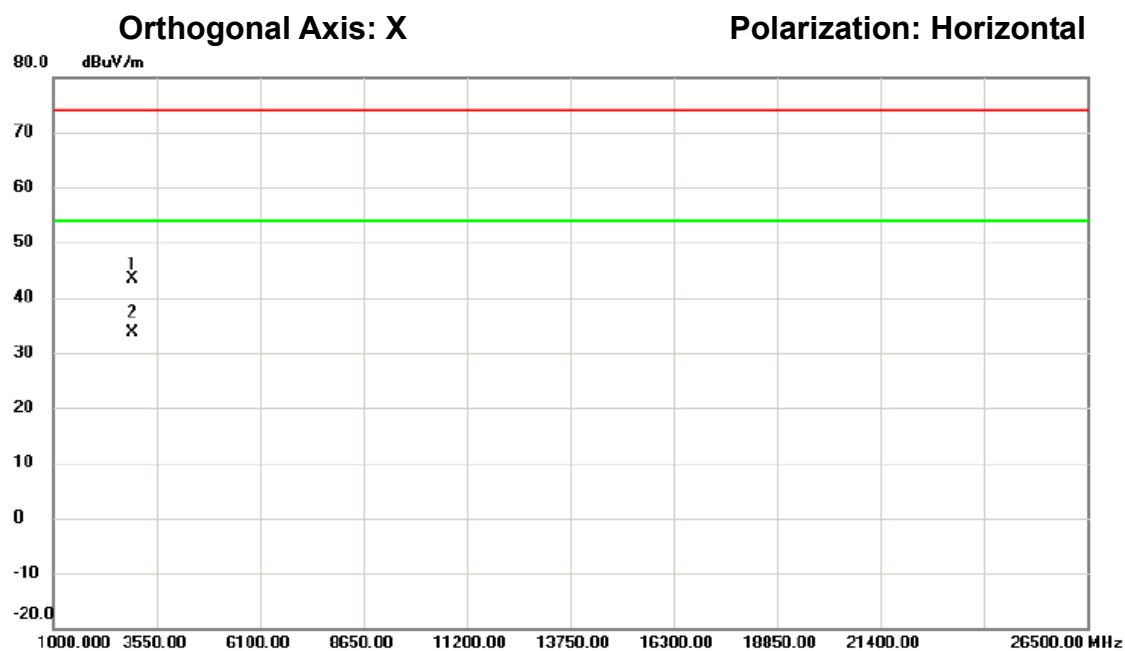

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2945.360	44.35	-1.09	43.26	74.00	-30.74	peak	
2	*	2945.360	34.65	-1.09	33.56	54.00	-20.44	AVG	

With Beamforming

測試頻道: IEEE 802.11n (HT20) /
2412 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

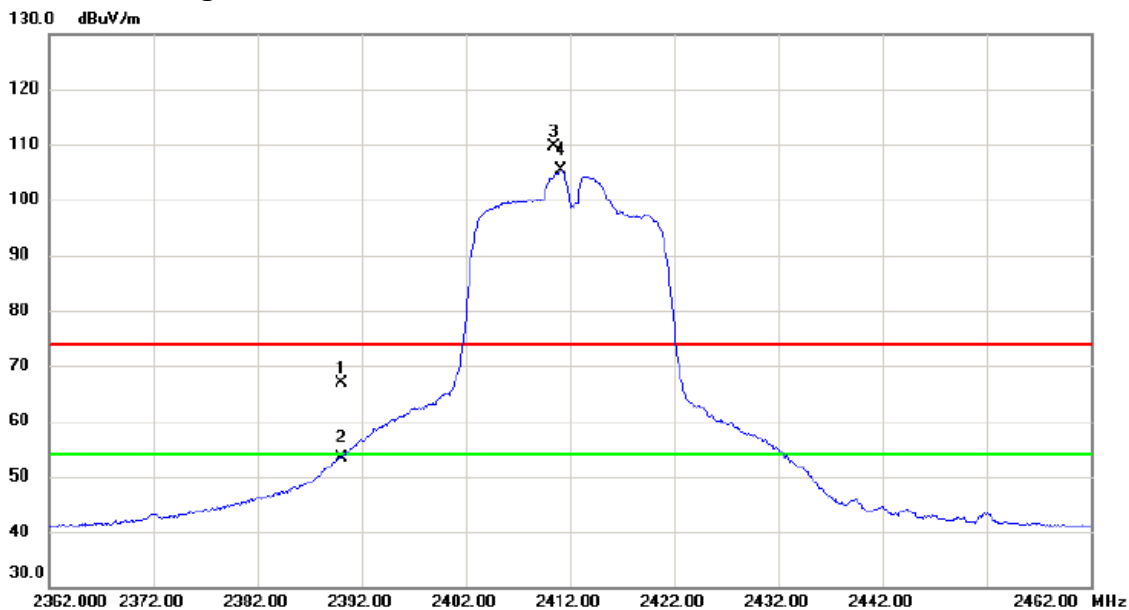

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	59.72	7.17	66.89	74.00	-7.11	peak	
2		2390.000	46.24	7.17	53.41	54.00	-0.59	AVG	
3	X	2410.500	102.36	7.24	109.60	74.00	35.60	peak	主波訊號不予判定
4	*	2411.200	98.04	7.24	105.28	54.00	51.28	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2412 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

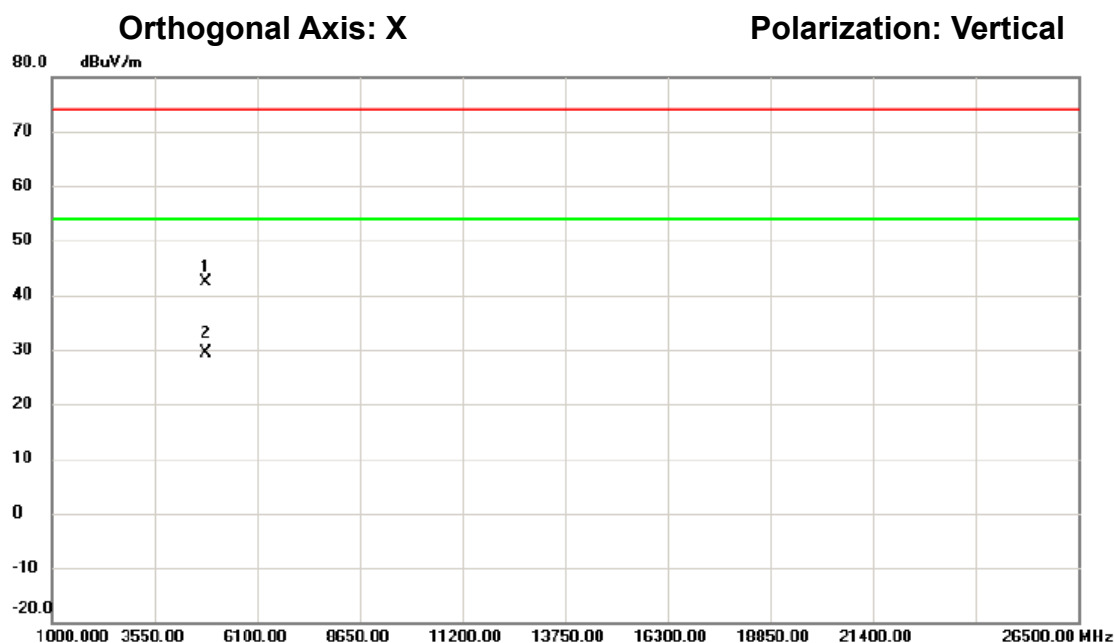

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4822.097	38.89	3.44	42.33	74.00	-31.67	peak	
2	*	4822.422	25.94	3.44	29.38	54.00	-24.62	AVG	

測試頻道: IEEE 802.11n (HT20) /
2412 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

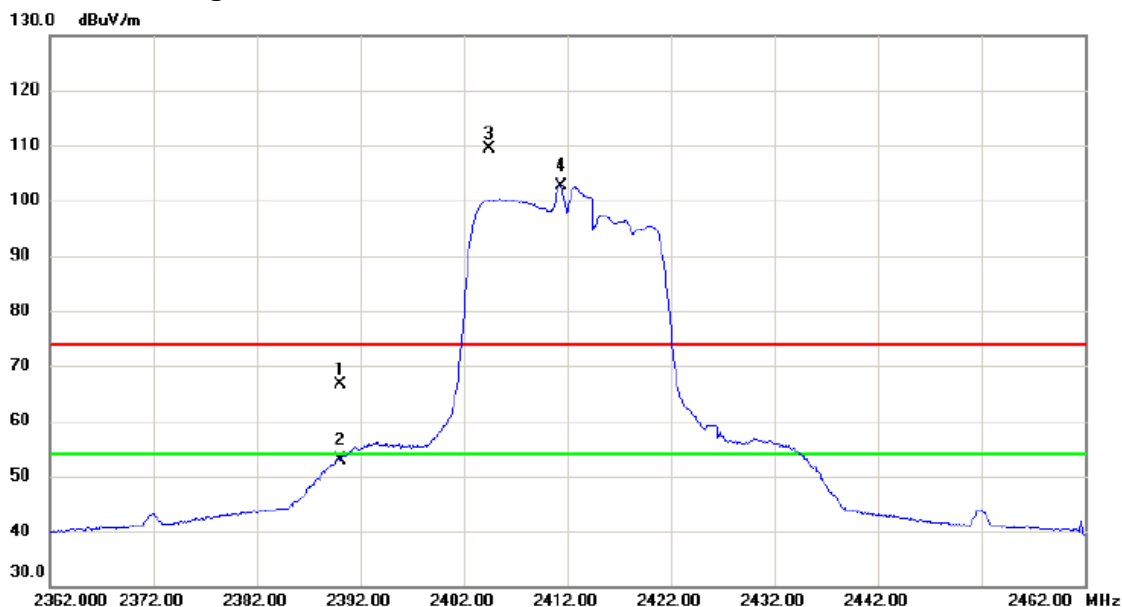

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	59.46	7.17	66.63	74.00	-7.37	peak	
2		2390.000	45.75	7.17	52.92	54.00	-1.08	AVG	
3	X	2404.500	102.07	7.21	109.28	74.00	35.28	peak	主波訊號不予判定
4	*	2411.350	95.31	7.24	102.55	54.00	48.55	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2412 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

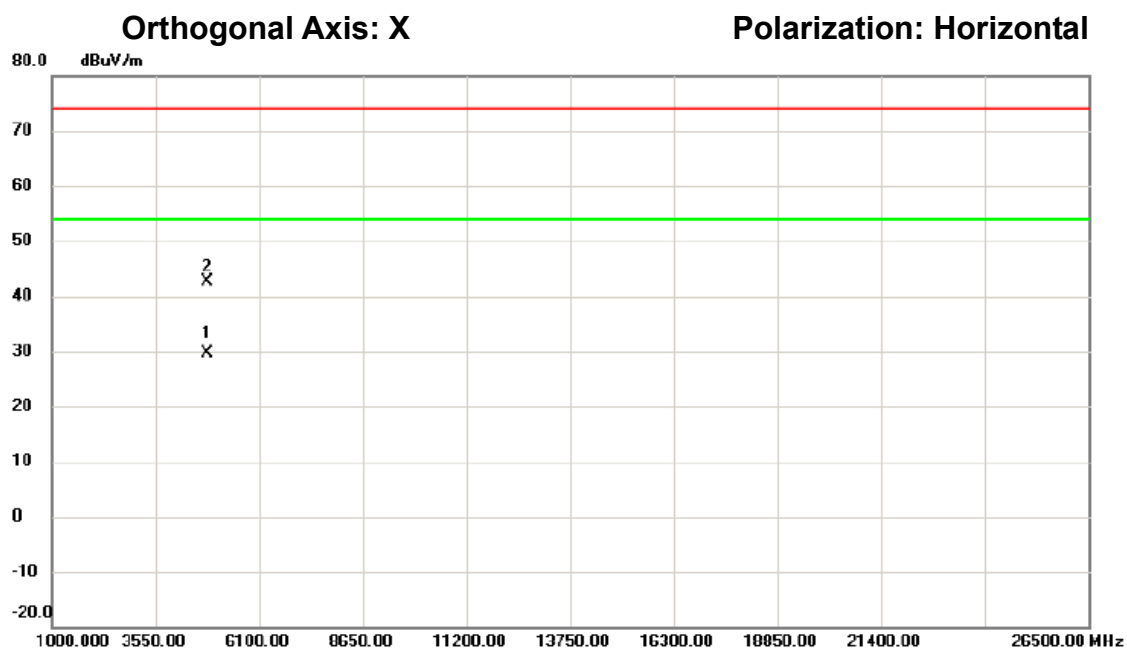

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4823.873	26.07	3.44	29.51	54.00	-24.49	AVG	
2		4825.950	39.16	3.46	42.62	74.00	-31.38	peak	

測試頻道: IEEE 802.11n (HT20) /
2417 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

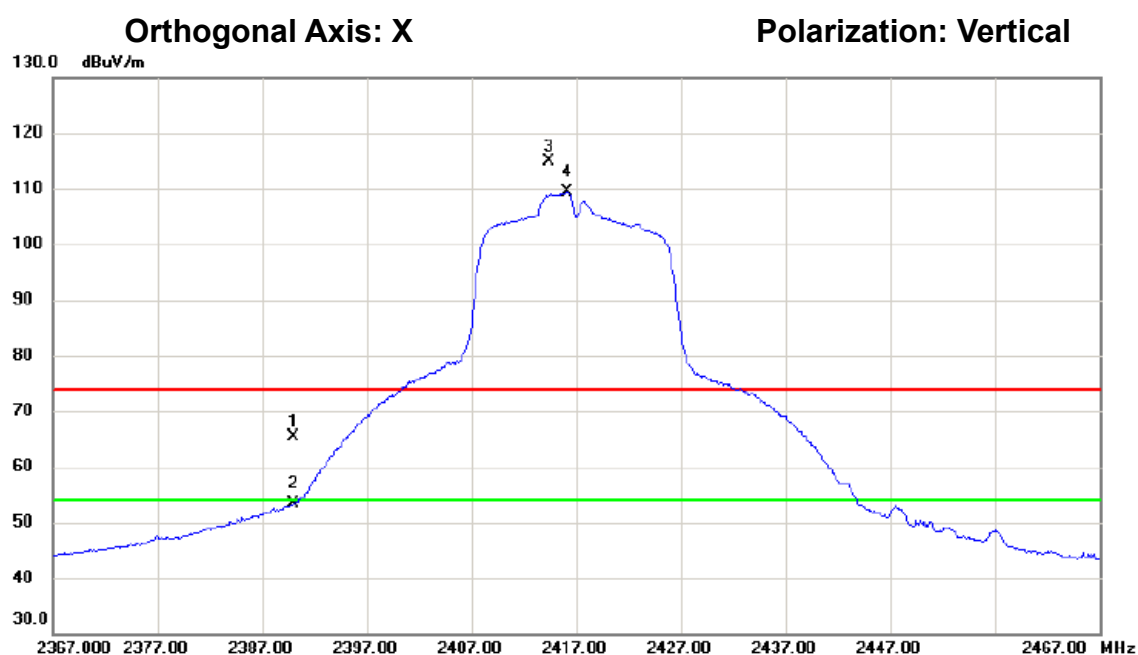

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.32	7.17	65.49	74.00	-8.51	peak	
2		2390.000	46.30	7.17	53.47	54.00	-0.53	AVG	
3	X	2414.350	107.73	7.25	114.98	74.00	40.98	peak	主波訊號不予判定
4	*	2416.200	102.22	7.25	109.47	54.00	55.47	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2417 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

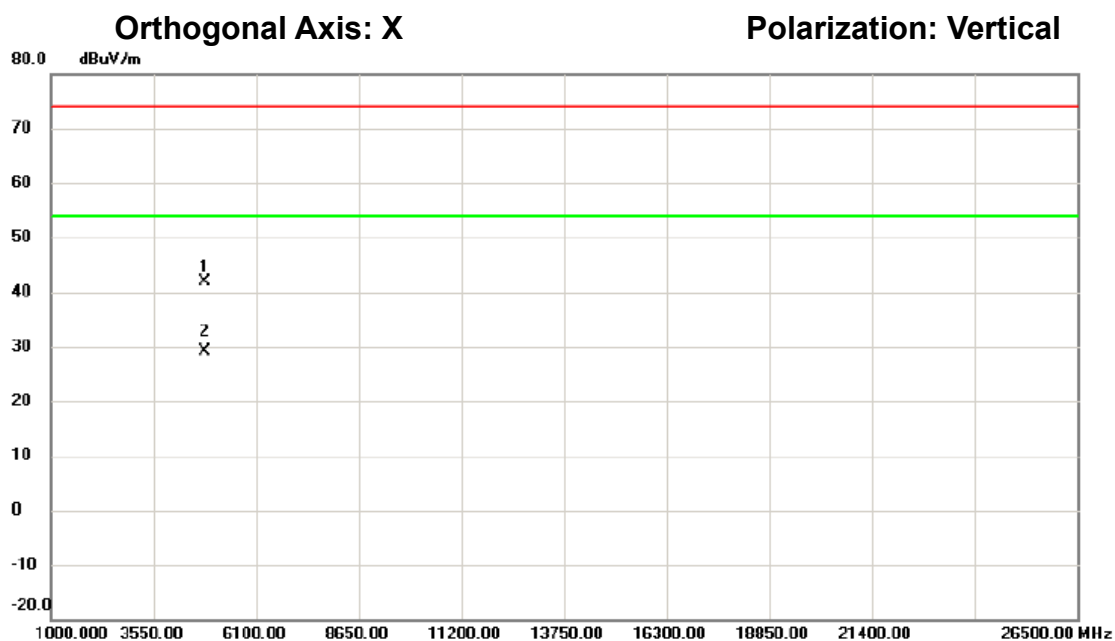

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4831.712	38.43	3.47	41.90	74.00	-32.10	peak	
2	*	4834.960	25.73	3.48	29.21	54.00	-24.79	AVG	

測試頻道: IEEE 802.11n (HT20) /
2417 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

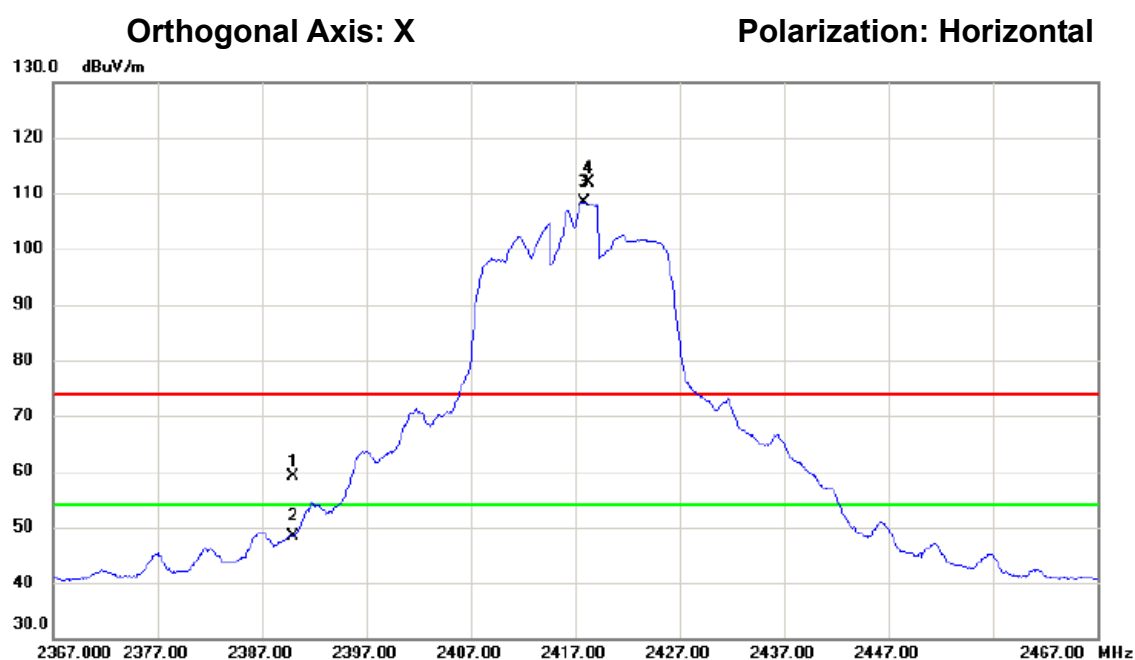

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	52.05	7.17	59.22	74.00	-14.78	peak	
2		2390.000	41.30	7.17	48.47	54.00	-5.53	AVG	
3	*	2417.800	101.24	7.26	108.50	54.00	54.50	AVG	主波訊號不予判定
4	X	2418.300	104.57	7.26	111.83	74.00	37.83	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2417 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

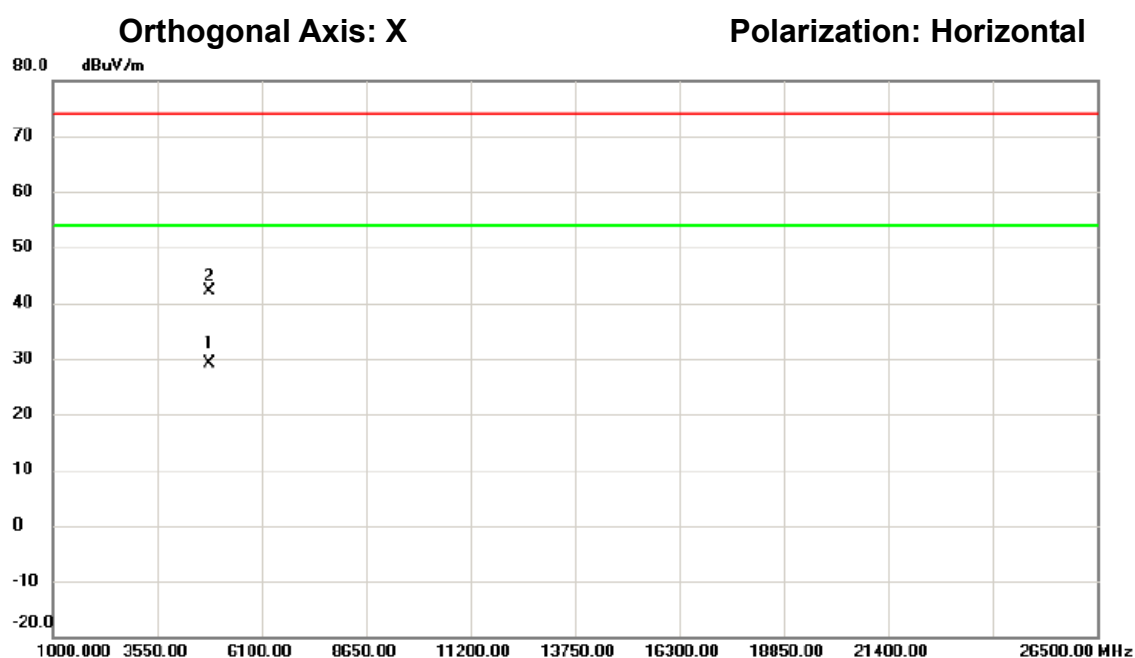

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4832.555	25.63	3.47	29.10	54.00	-24.90	AVG	
2		4835.635	38.66	3.48	42.14	74.00	-31.86	peak	

測試頻道: IEEE 802.11n (HT20) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

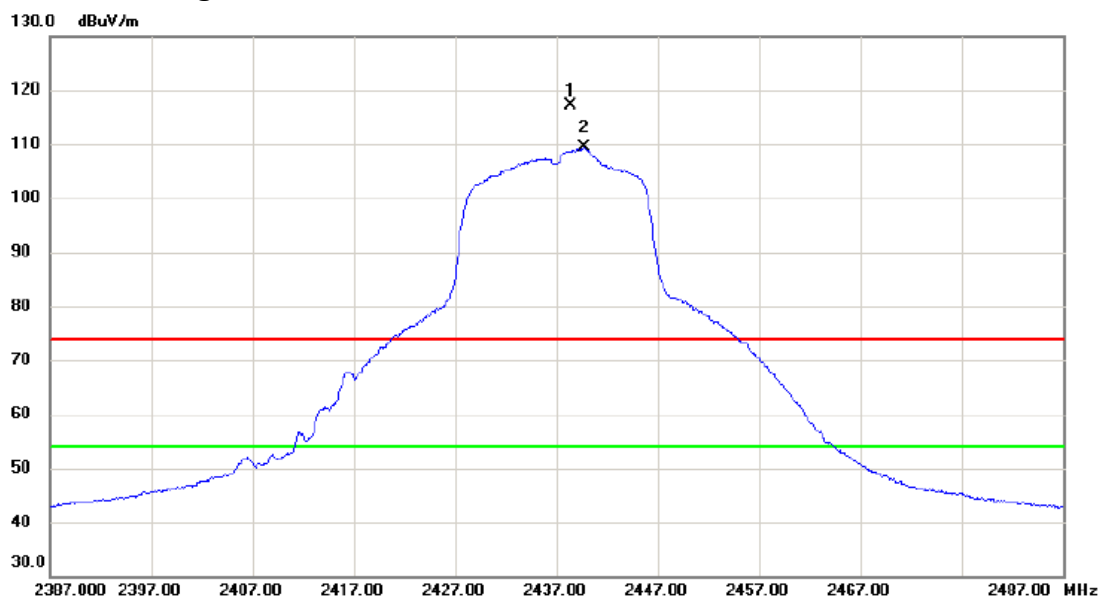

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2438.400	109.77	7.32	117.09	74.00	43.09	peak	主波訊號不予判定
2	*	2439.750	101.96	7.32	109.28	54.00	55.28	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

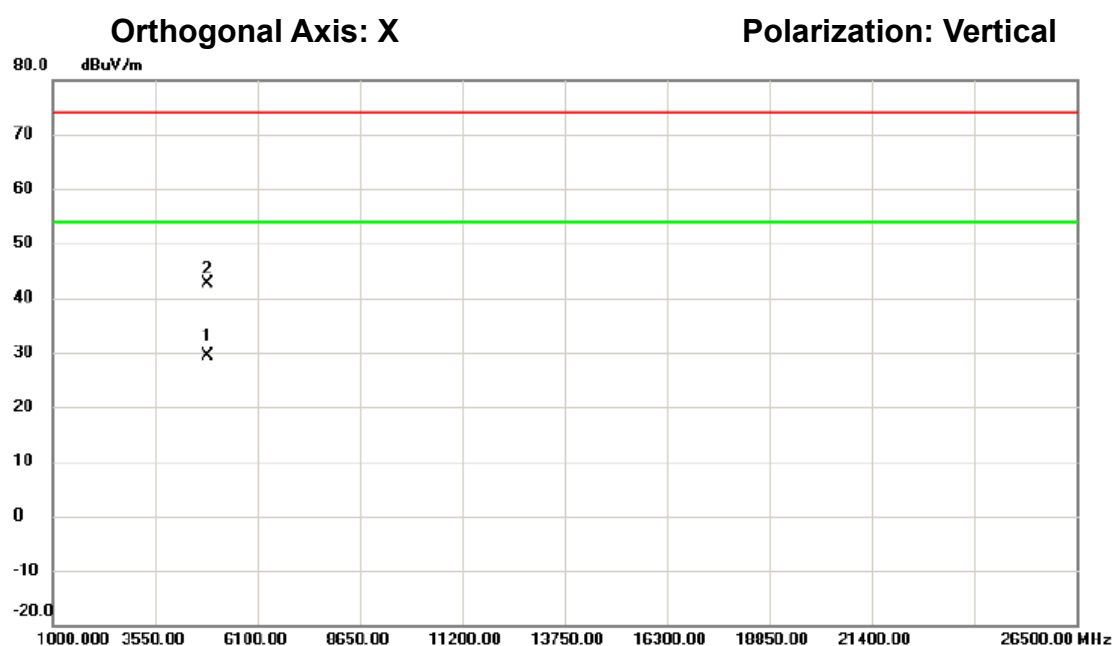

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4871.780	25.88	3.62	29.50	54.00	-24.50	AVG	
2		4874.200	39.01	3.62	42.63	74.00	-31.37	peak	

測試頻道: IEEE 802.11n (HT20) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

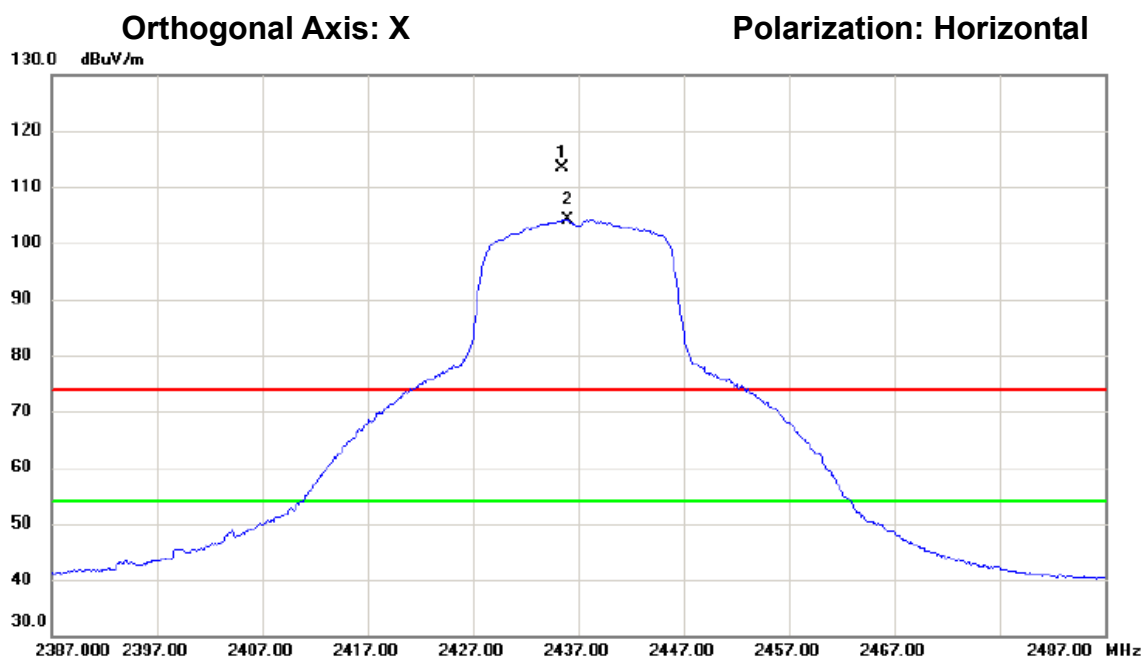

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2435.500	106.17	7.31	113.48	74.00	39.48	peak	主波訊號不予判定
2	*	2435.950	96.86	7.31	104.17	54.00	50.17	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

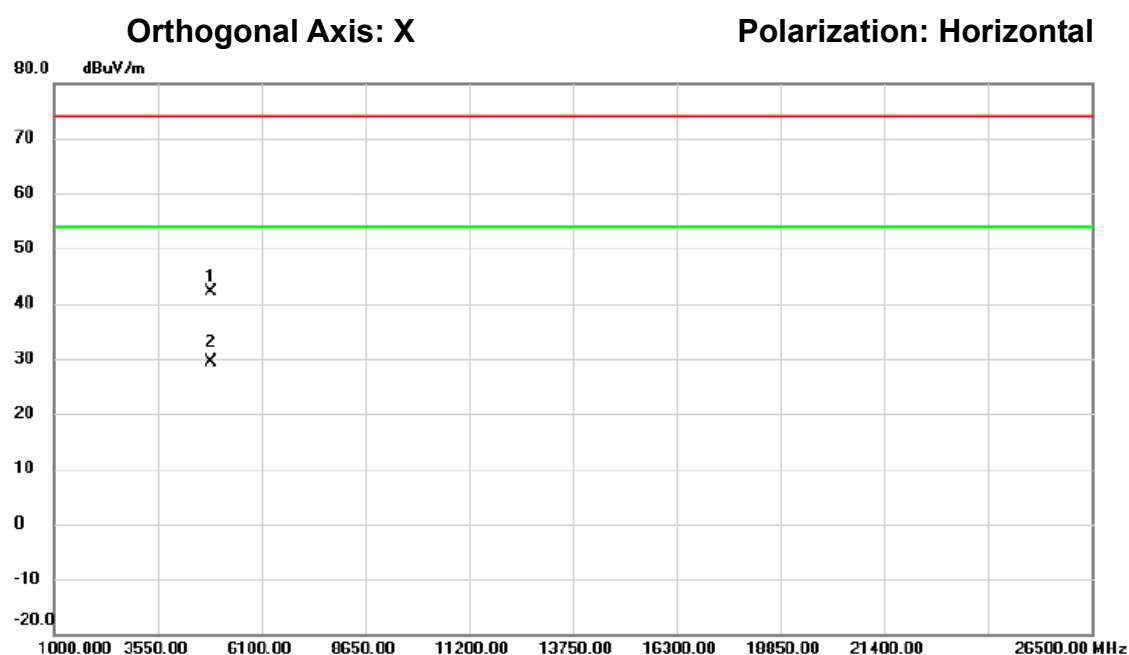

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4872.475	38.54	3.62	42.16	74.00	-31.84	peak	
2	*	4872.488	25.84	3.62	29.46	54.00	-24.54	AVG	

測試頻道: IEEE 802.11n (HT20) /
2457 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

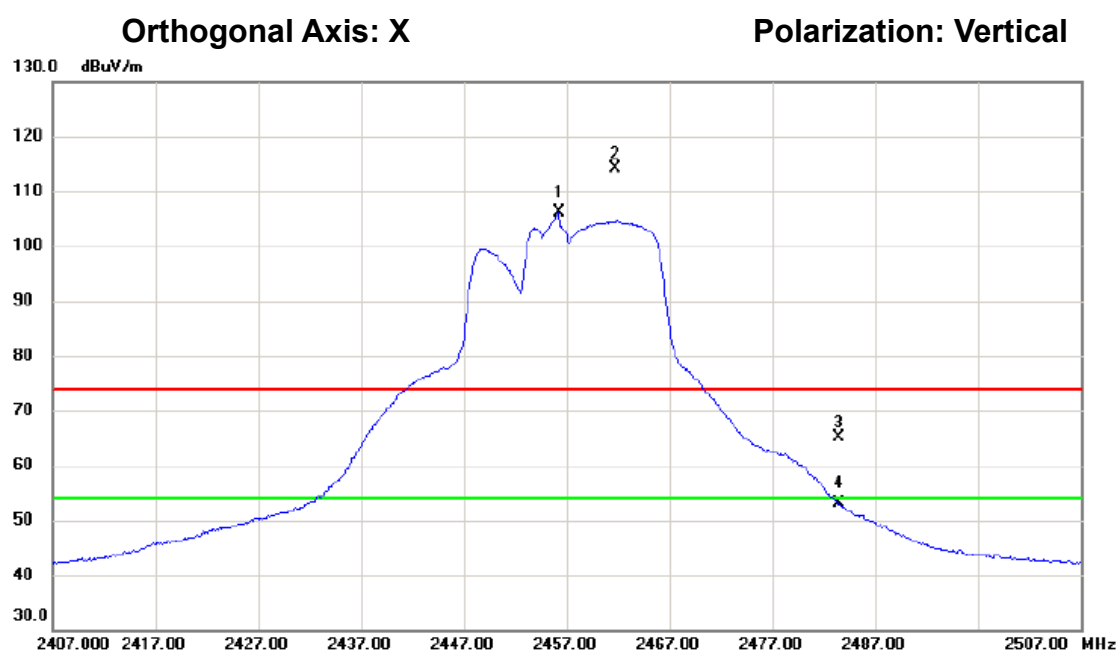

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2456.250	98.69	7.38	106.07	54.00	52.07	AVG	主波訊號不予判定
2	X	2461.750	106.62	7.39	114.01	74.00	40.01	peak	主波訊號不予判定
3		2483.500	57.67	7.47	65.14	74.00	-8.86	peak	
4		2483.500	45.55	7.47	53.02	54.00	-0.98	AVG	

測試頻道: IEEE 802.11n (HT20) /
2457 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

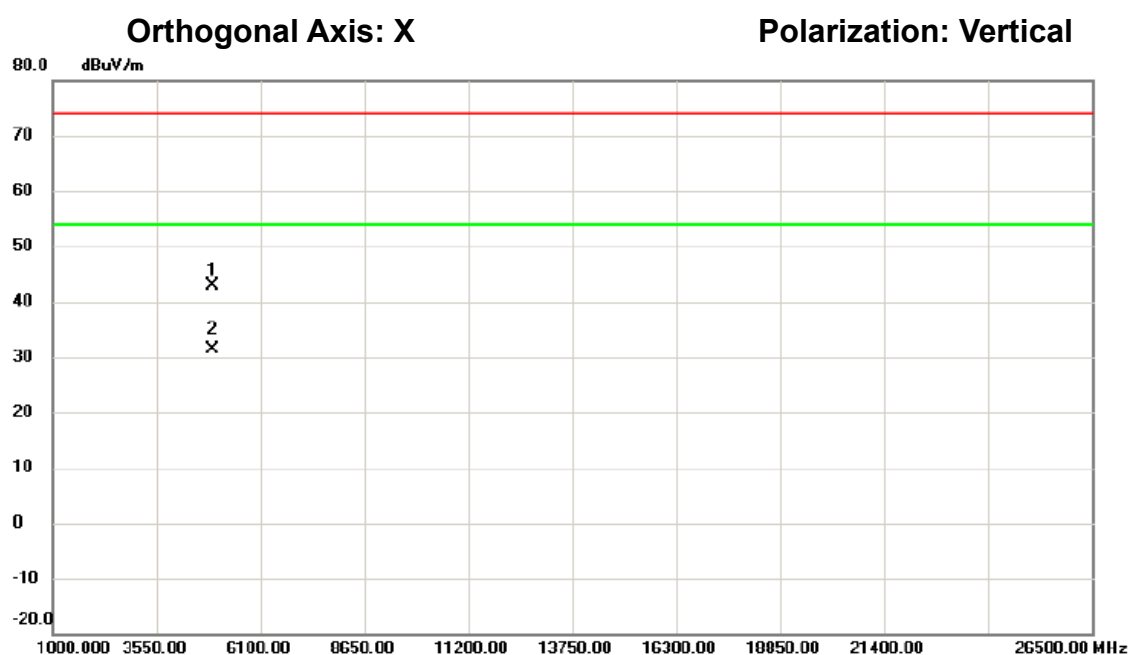

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4914.488	39.21	3.78	42.99	74.00	-31.01	peak	
2 *		4916.222	27.54	3.78	31.32	54.00	-22.68	AVG	

測試頻道: IEEE 802.11n (HT20) /
2457 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

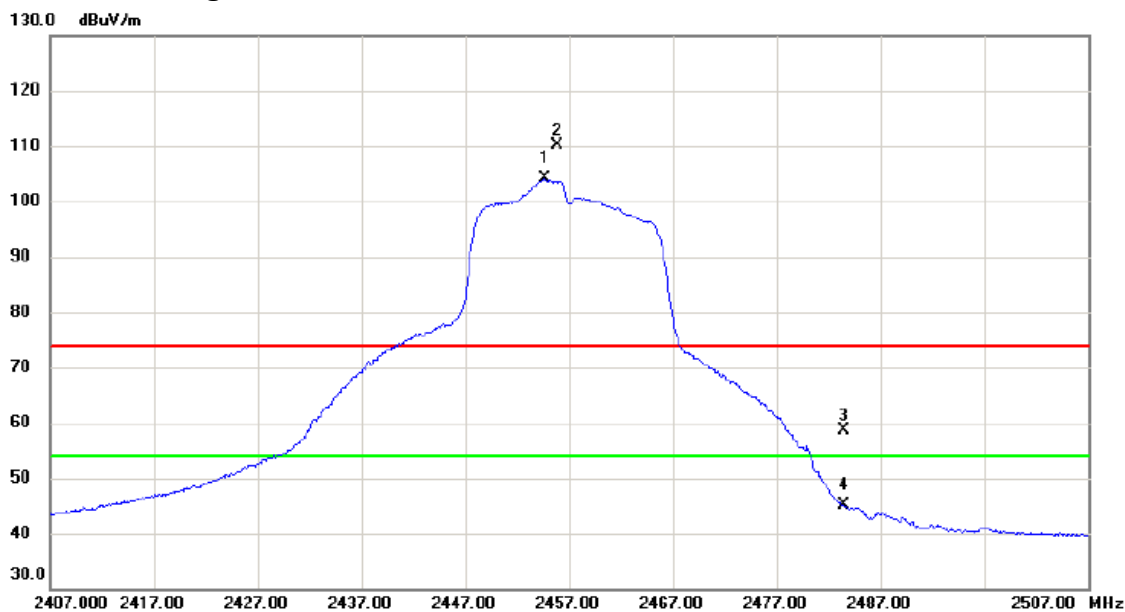

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.700	96.69	7.37	104.06	54.00	50.06	AVG	主波訊號不予判定
2	X	2455.850	102.74	7.38	110.12	74.00	36.12	peak	主波訊號不予判定
3		2483.500	51.21	7.47	58.68	74.00	-15.32	peak	
4		2483.500	37.62	7.47	45.09	54.00	-8.91	AVG	

測試頻道: IEEE 802.11n (HT20) /
2457 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

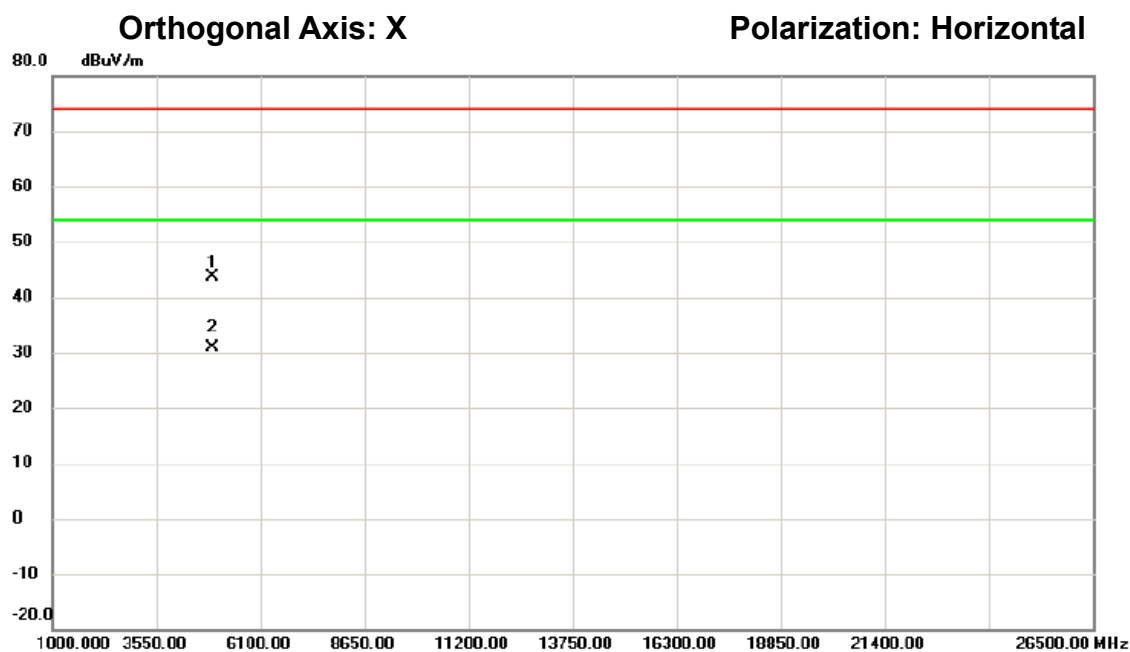

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4911.595	39.84	3.76	43.60	74.00	-30.40	peak	
2	*	4915.950	27.09	3.78	30.87	54.00	-23.13	AVG	

測試頻道: IEEE 802.11n (HT20) /
2462 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

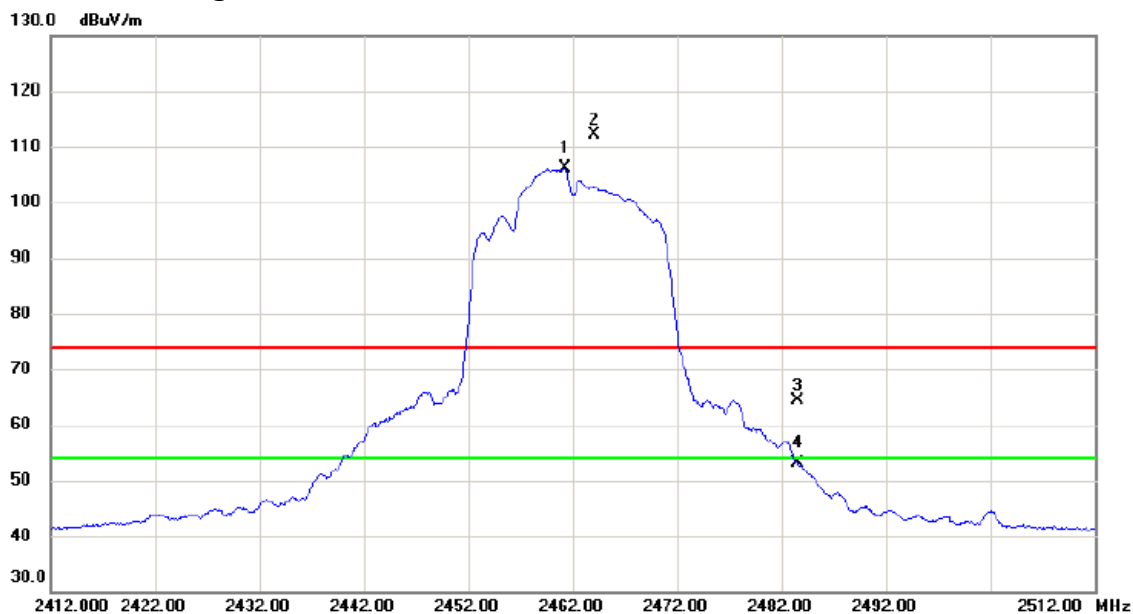

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2461.250	98.69	7.39	106.08	54.00	52.08	AVG	主波訊號不予判定
2	X	2464.100	104.65	7.40	112.05	74.00	38.05	peak	主波訊號不予判定
3		2483.500	57.03	7.47	64.50	74.00	-9.50	peak	
4		2483.500	45.65	7.47	53.12	54.00	-0.88	AVG	

測試頻道: IEEE 802.11n (HT20) /
2462 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

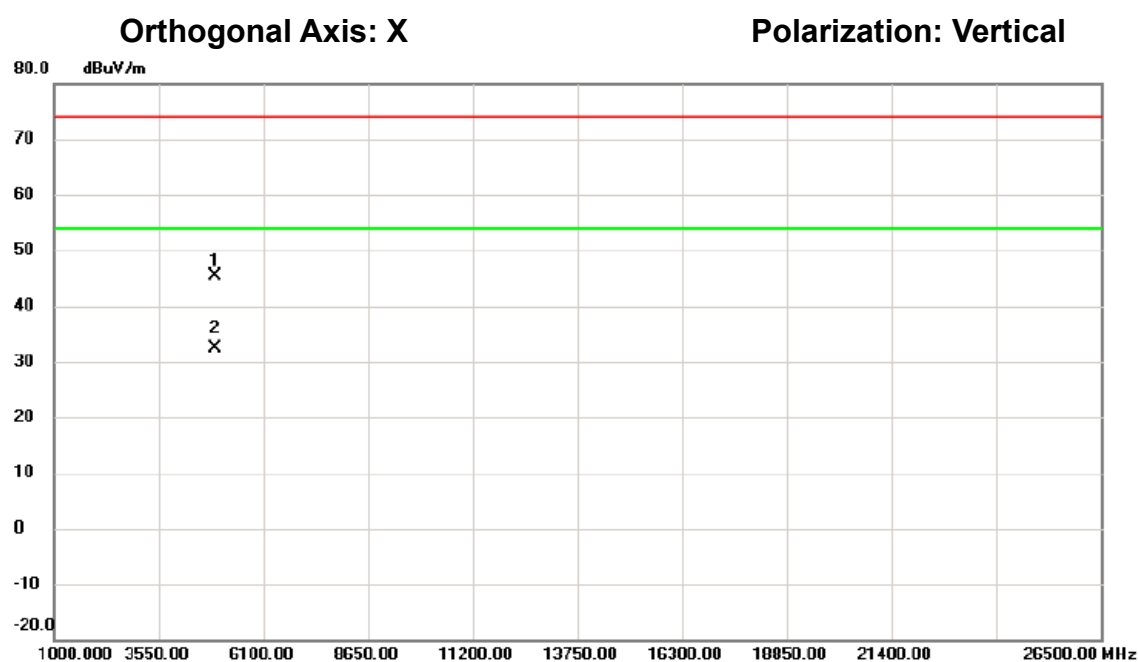

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4923.515	41.61	3.81	45.42	74.00	-28.58	peak	
2	*	4923.583	28.55	3.81	32.36	54.00	-21.64	AVG	

測試頻道: IEEE 802.11n (HT20) /
2462 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

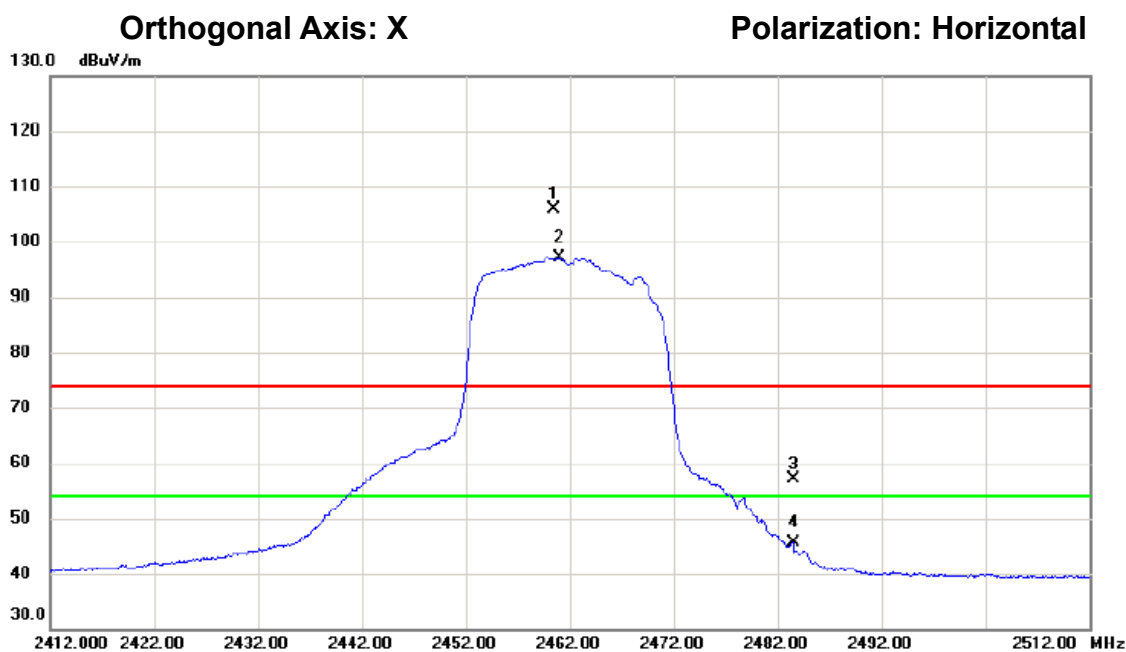

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.450	98.55	7.39	105.94	74.00	31.94	peak	主波訊號不予判定
2	*	2460.950	89.80	7.39	97.19	54.00	43.19	AVG	主波訊號不予判定
3		2483.500	49.76	7.47	57.23	74.00	-16.77	peak	
4		2483.500	38.04	7.47	45.51	54.00	-8.49	AVG	

測試頻道: IEEE 802.11n (HT20) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

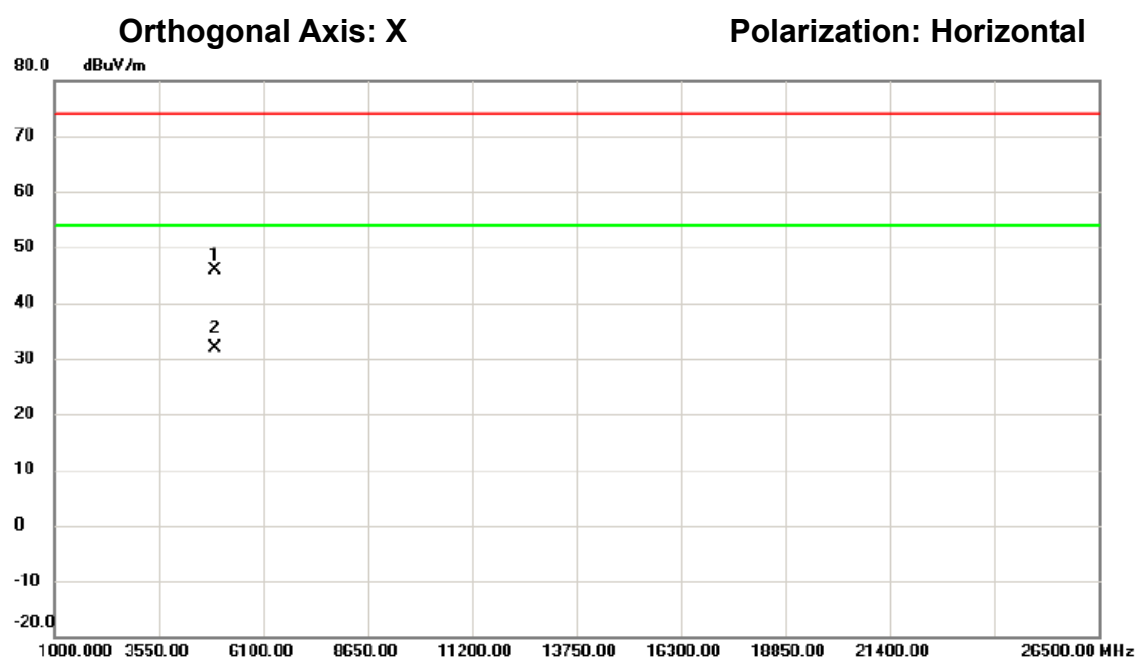

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4922.315	42.01	3.81	45.82	74.00	-28.18	peak	
2	*	4923.823	28.17	3.81	31.98	54.00	-22.02	AVG	

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

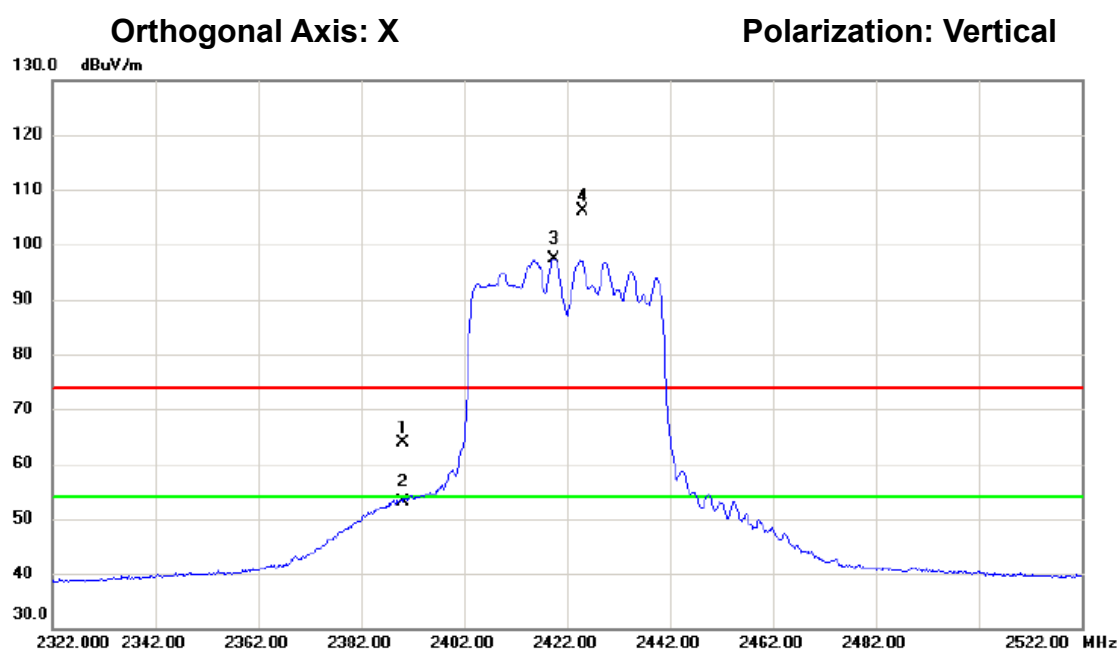

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.67	7.17	63.84	74.00	-10.16	peak	
2		2390.000	45.97	7.17	53.14	54.00	-0.86	AVG	
3	*	2419.600	90.20	7.26	97.46	54.00	43.46	AVG	主波訊號不予判定
4	X	2425.000	98.82	7.29	106.11	74.00	32.11	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

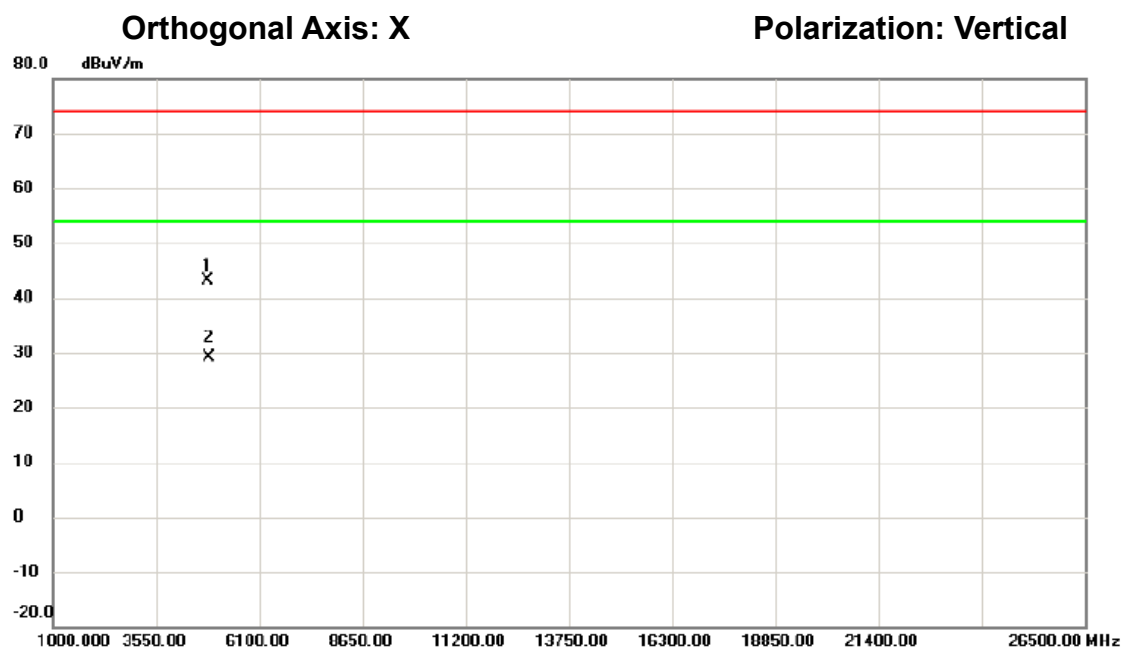

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4841.640	39.54	3.51	43.05	74.00	-30.95	peak	
2	*	4842.038	25.55	3.51	29.06	54.00	-24.94	AVG	

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	46.03	7.17	53.20	74.00	-20.80	peak	
2		2390.000	35.45	7.17	42.62	54.00	-11.38	AVG	
3	*	2410.600	89.49	7.24	96.73	54.00	42.73	AVG	主波訊號不予判定
4	X	2413.400	95.67	7.24	102.91	74.00	28.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

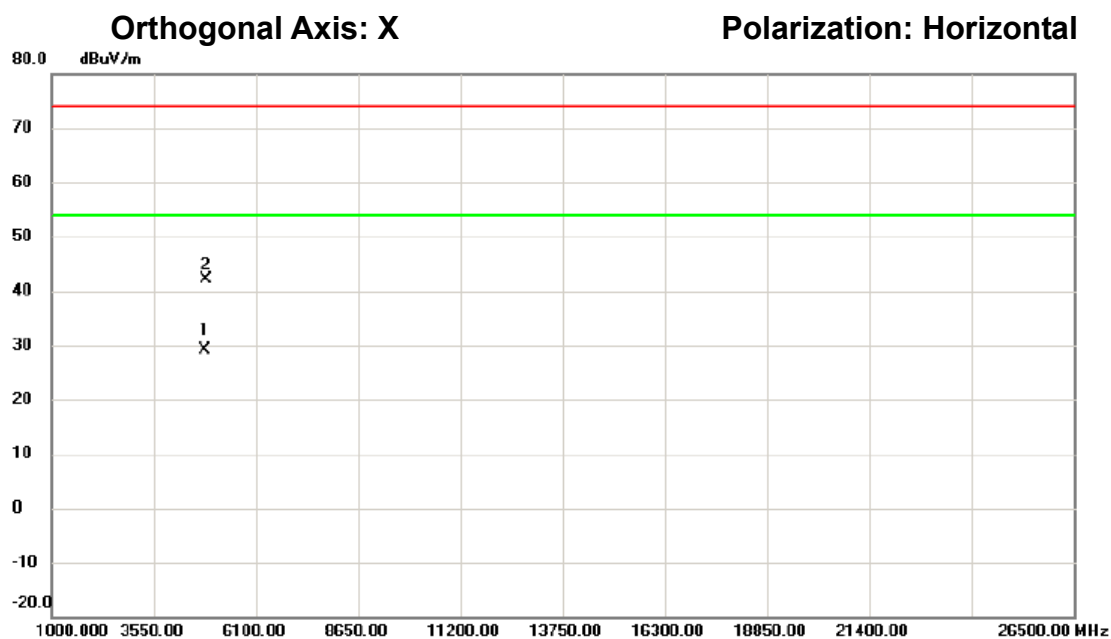

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4841.930	25.61	3.51	29.12	54.00	-24.88	AVG	
2		4844.070	38.70	3.52	42.22	74.00	-31.78	peak	

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

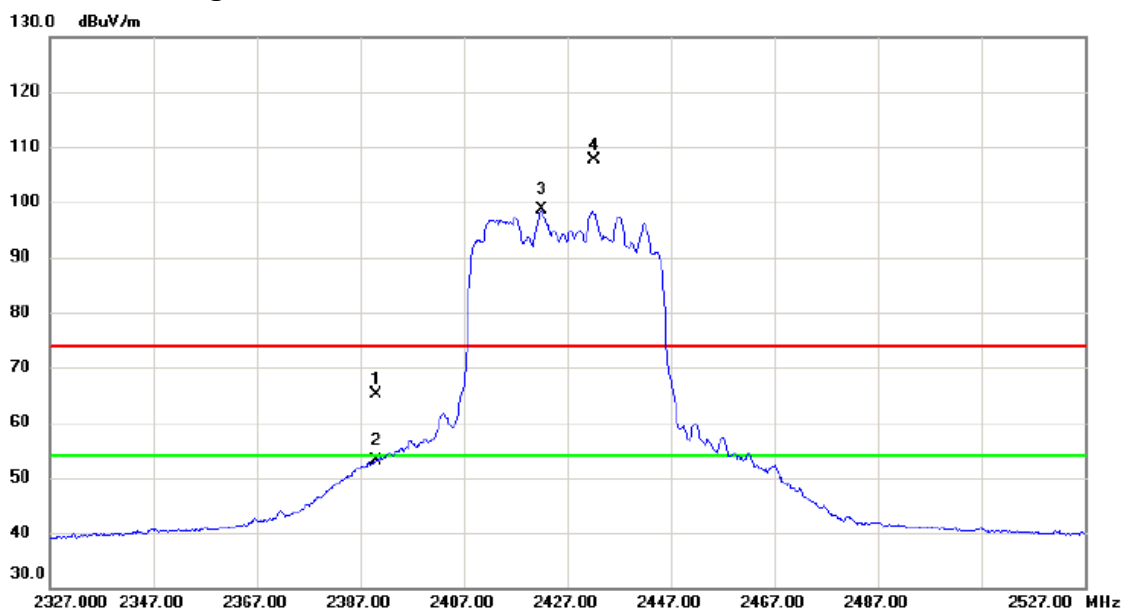

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.07	7.17	65.24	74.00	-8.76	peak	
2		2390.000	46.08	7.17	53.25	54.00	-0.75	AVG	
3	*	2422.100	91.23	7.28	98.51	54.00	44.51	AVG	主波訊號不予判定
4	X	2432.100	100.45	7.29	107.74	74.00	33.74	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

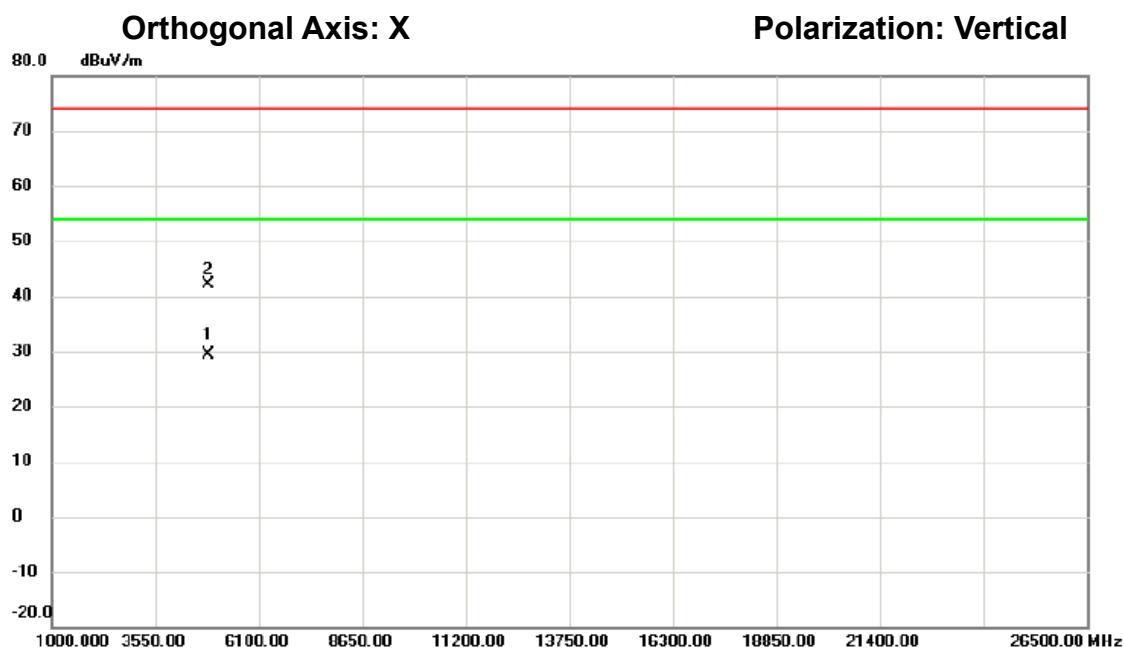

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4852.677	25.72	3.55	29.27	54.00	-24.73	AVG	
2		4855.977	38.62	3.57	42.19	74.00	-31.81	peak	

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

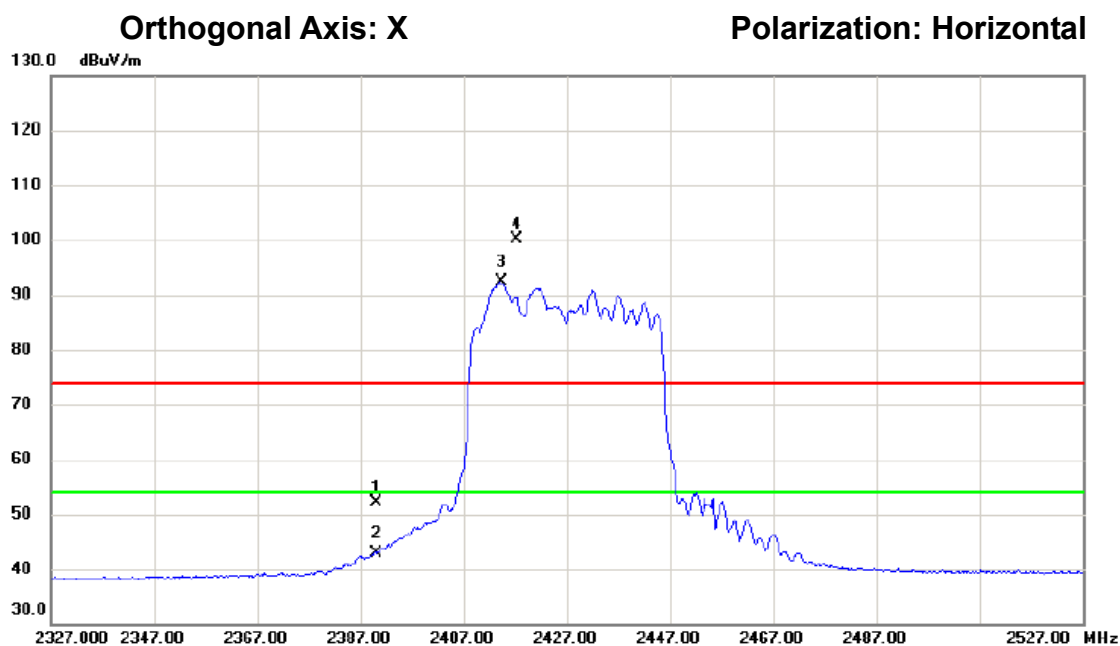

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	45.02	7.17	52.19	74.00	-21.81	peak	
2		2390.000	35.82	7.17	42.99	54.00	-11.01	AVG	
3	*	2414.300	85.01	7.25	92.26	54.00	38.26	AVG	主波訊號不予判定
4	X	2417.300	92.92	7.25	100.17	74.00	26.17	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

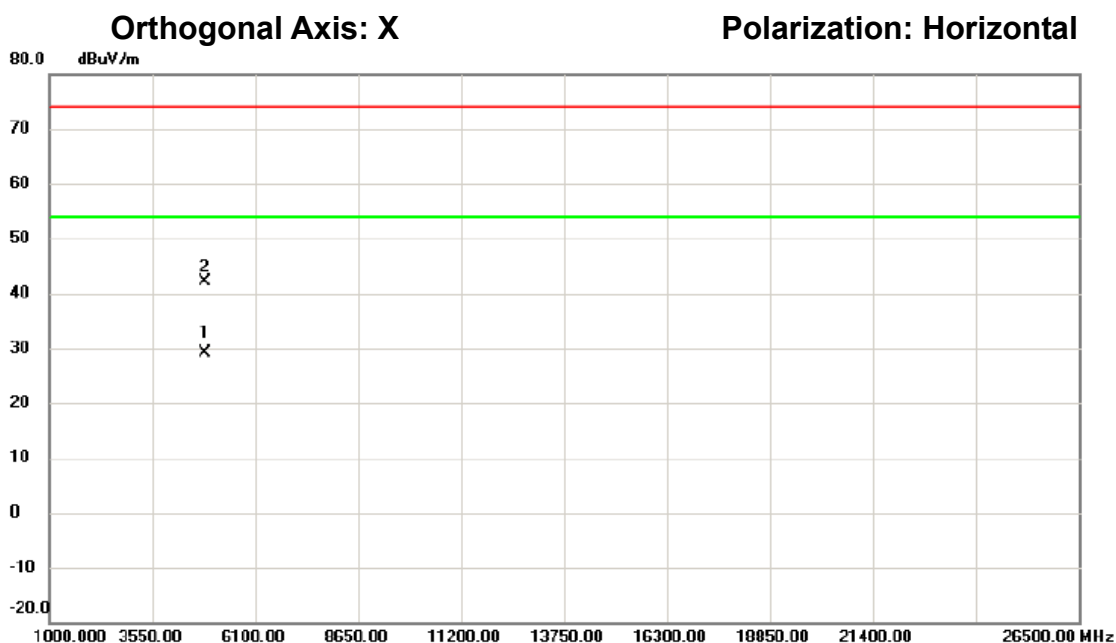

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4854.145	25.69	3.55	29.24	54.00	-24.76	AVG	
2		4855.083	38.59	3.55	42.14	74.00	-31.86	peak	

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

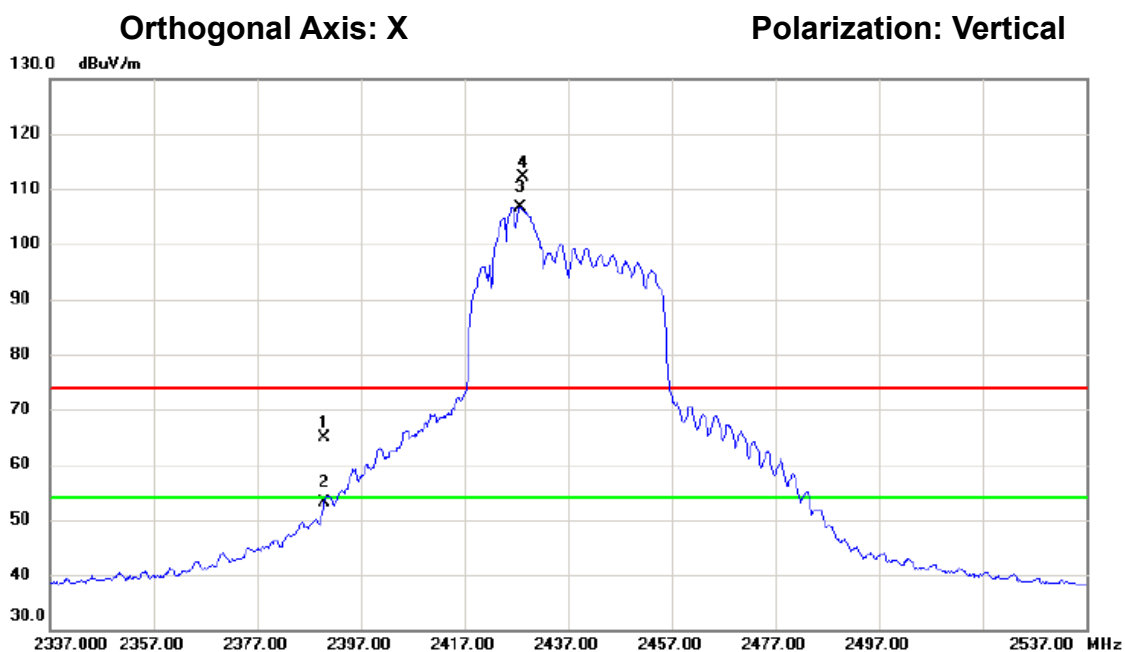

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	57.83	7.17	65.00	74.00	-9.00	peak	
2		2390.000	45.98	7.17	53.15	54.00	-0.85	AVG	
3	*	2427.700	99.40	7.29	106.69	54.00	52.69	AVG	主波訊號不予判定
4	X	2428.400	104.85	7.29	112.14	74.00	38.14	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

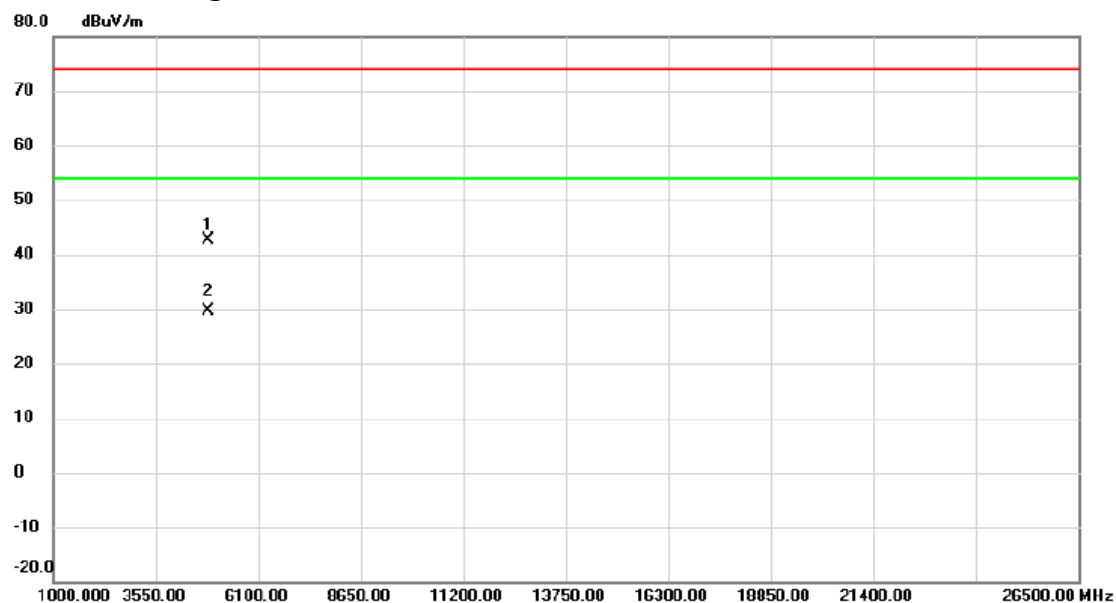

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4872.313	38.94	3.62	42.56	74.00	-31.44	peak	
2	*	4872.623	25.89	3.62	29.51	54.00	-24.49	AVG	

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

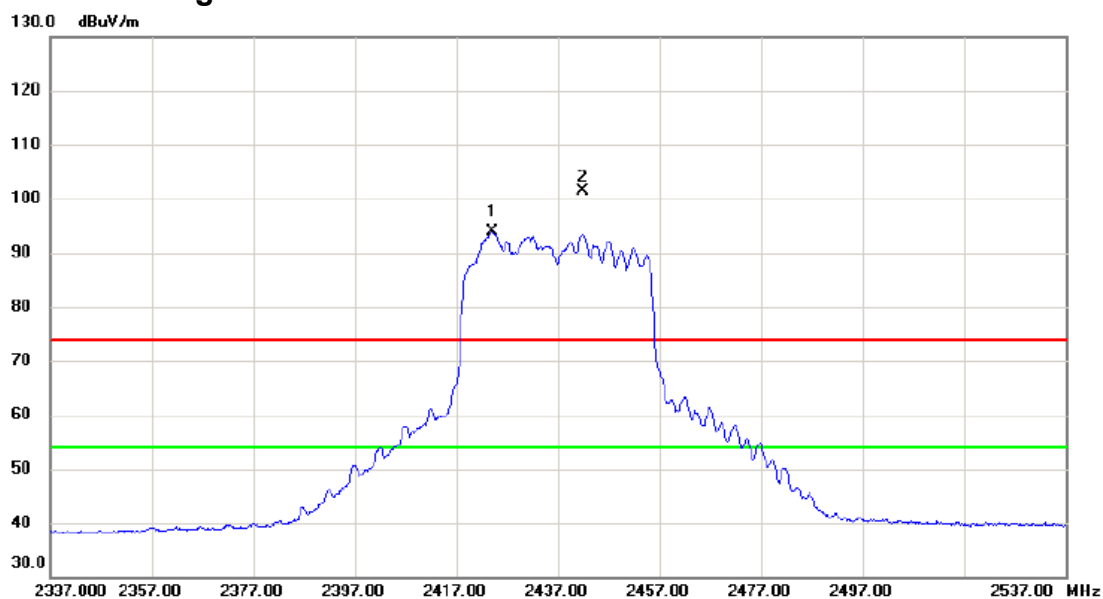

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2424.200	86.59	7.28	93.87	54.00	39.87	AVG	主波訊號不予判定
2	X	2441.800	94.16	7.33	101.49	74.00	27.49	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

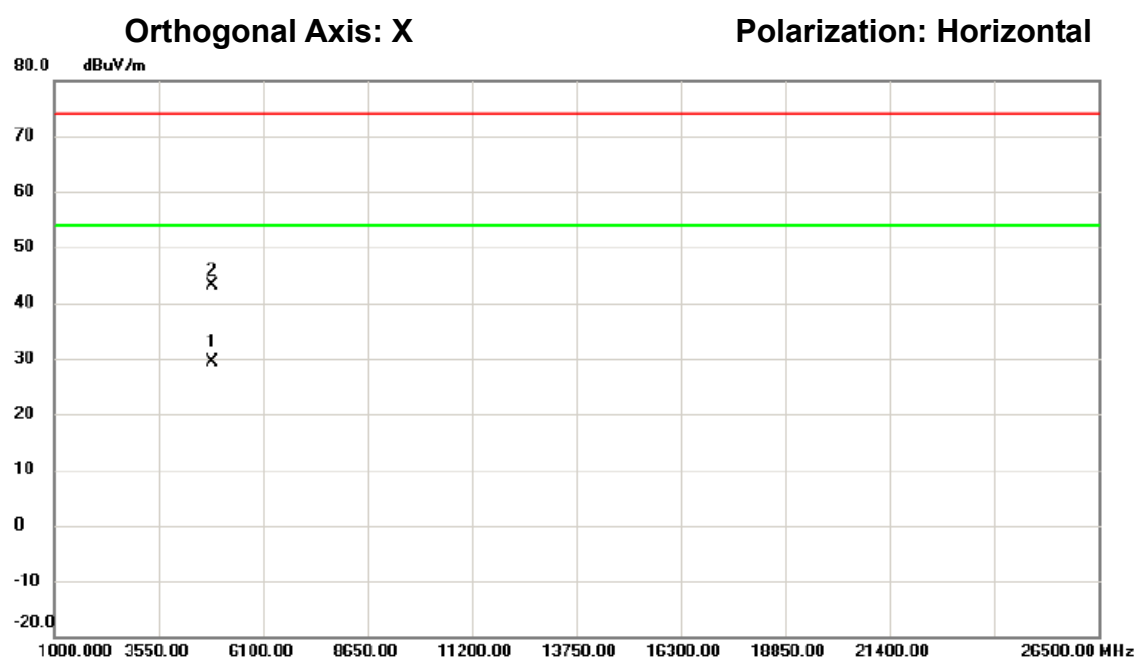

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4873.110	25.87	3.62	29.49	54.00	-24.51	AVG	
2		4875.205	39.49	3.64	43.13	74.00	-30.87	peak	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

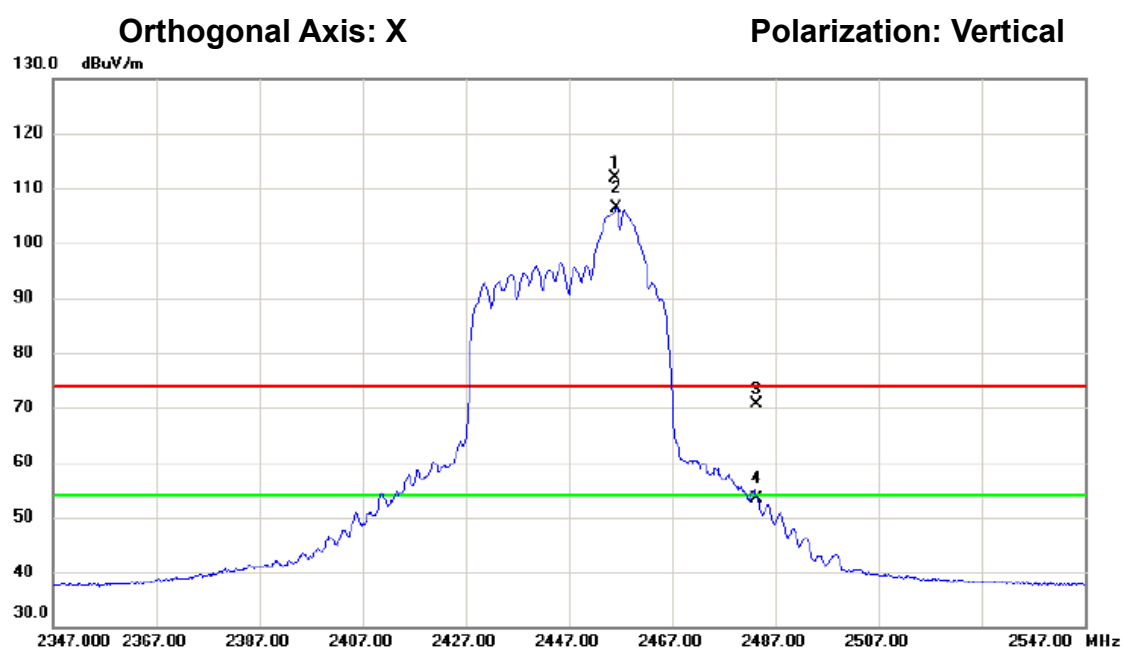

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.000	104.47	7.38	111.85	74.00	37.85	peak	主波訊號不予判定
2	*	2456.200	99.07	7.38	106.45	54.00	52.45	AVG	主波訊號不予判定
3		2483.500	63.04	7.47	70.51	74.00	-3.49	peak	
4		2483.500	45.91	7.47	53.38	54.00	-0.62	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

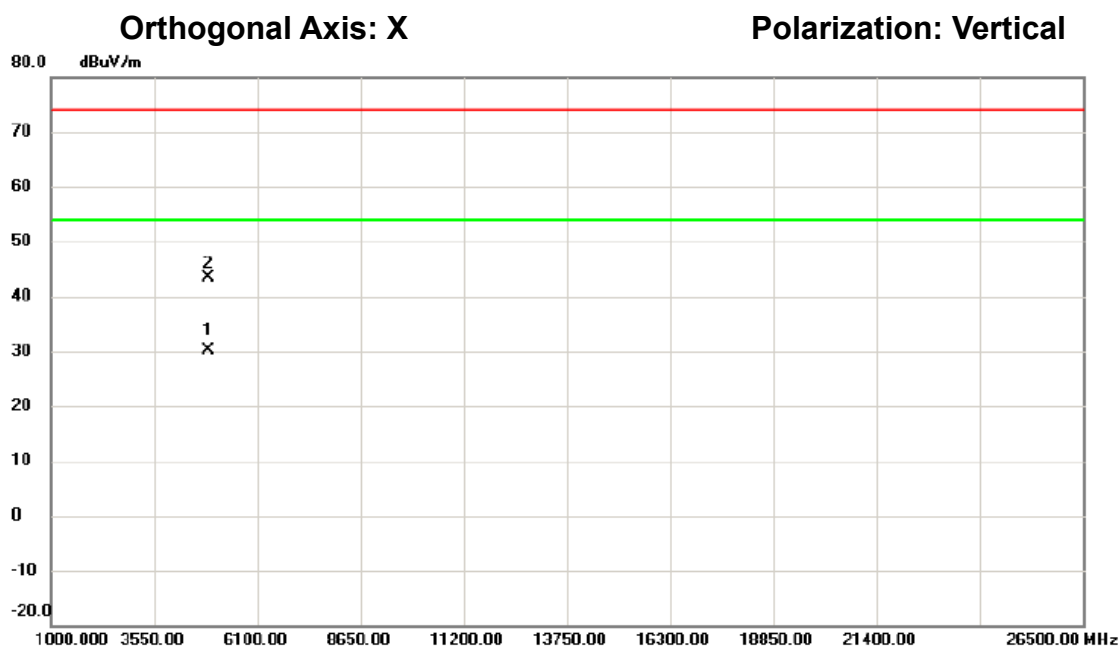

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4891.895	26.39	3.69	30.08	54.00	-23.92	AVG	
2		4896.250	39.70	3.71	43.41	74.00	-30.59	peak	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

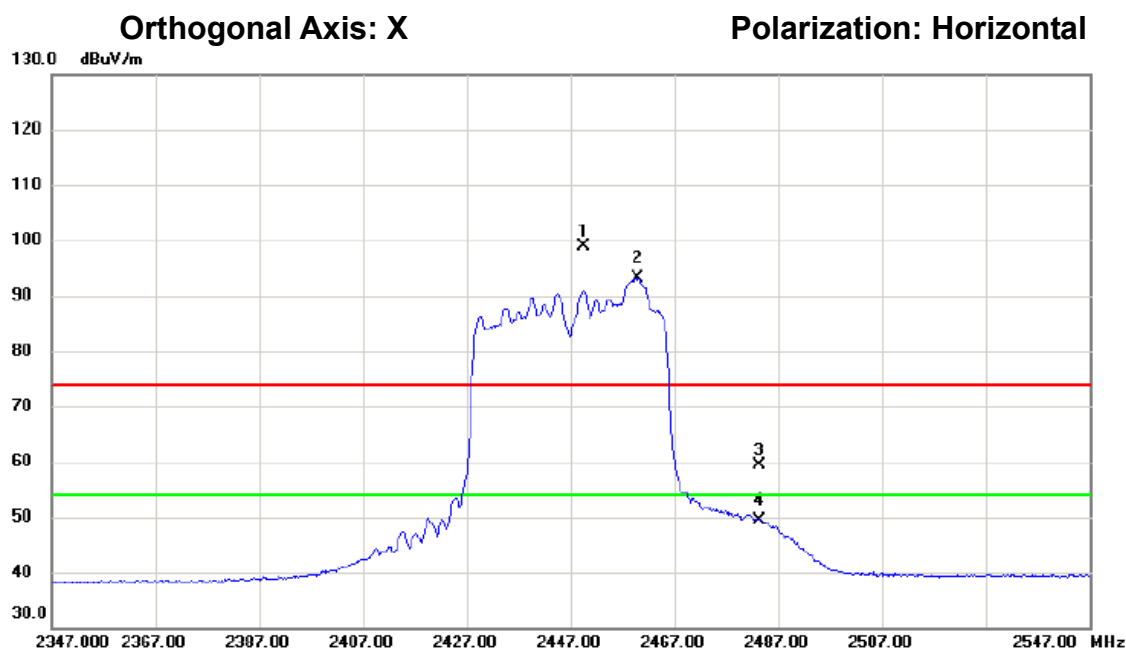

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2449.400	91.41	7.36	98.77	74.00	24.77	peak	主波訊號不予判定
2	*	2459.800	85.84	7.39	93.23	54.00	39.23	AVG	主波訊號不予判定
3		2483.500	51.85	7.47	59.32	74.00	-14.68	peak	
4		2483.500	42.01	7.47	49.48	54.00	-4.52	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/07

環境濕度: 52%

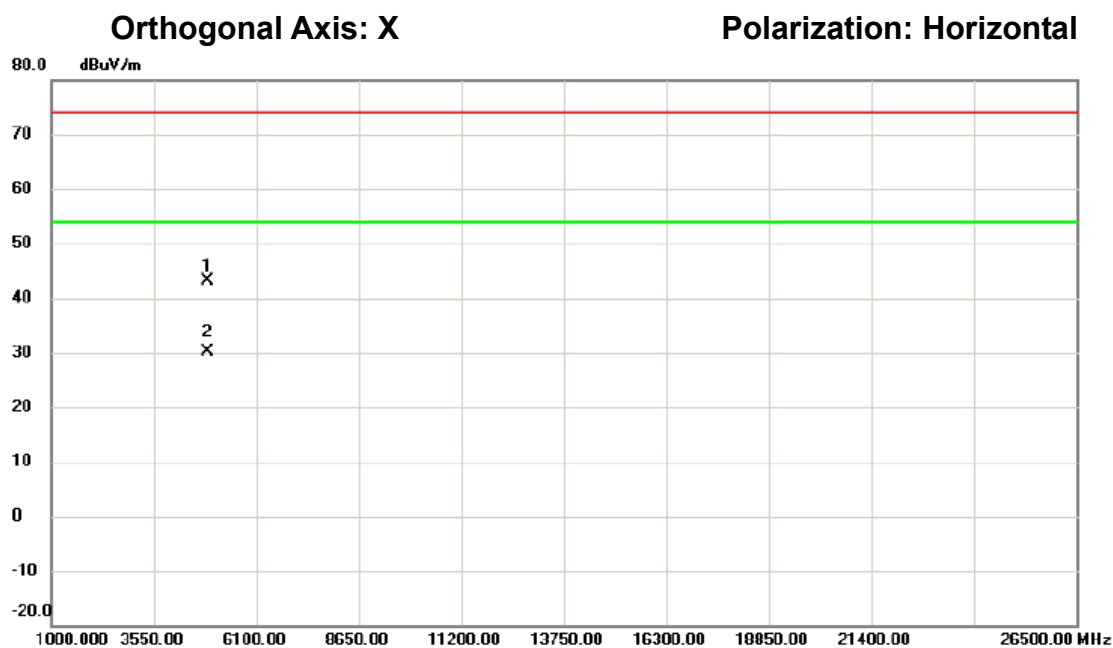

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4894.578	39.38	3.71	43.09	74.00	-30.91	peak	
2	*	4894.653	26.33	3.71	30.04	54.00	-23.96	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

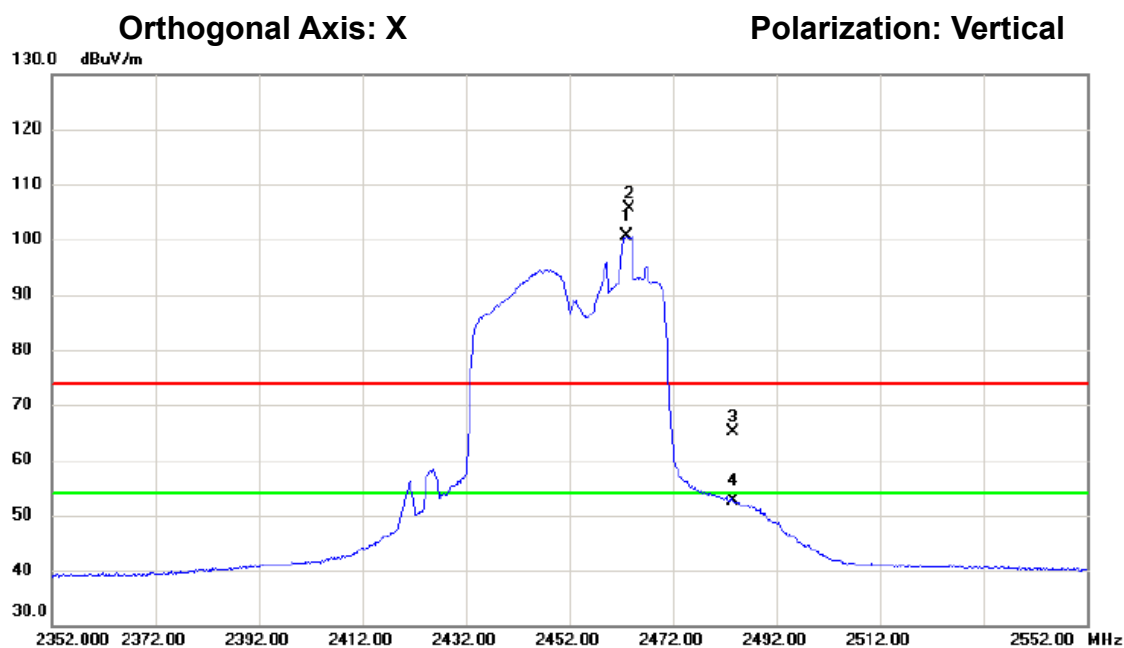

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2463.200	93.15	7.39	100.54	54.00	46.54	AVG	主波訊號不予判定
2	X	2463.500	98.25	7.40	105.65	74.00	31.65	peak	主波訊號不予判定
3		2483.500	57.68	7.47	65.15	74.00	-8.85	peak	
4		2483.530	45.20	7.47	52.67	54.00	-1.33	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

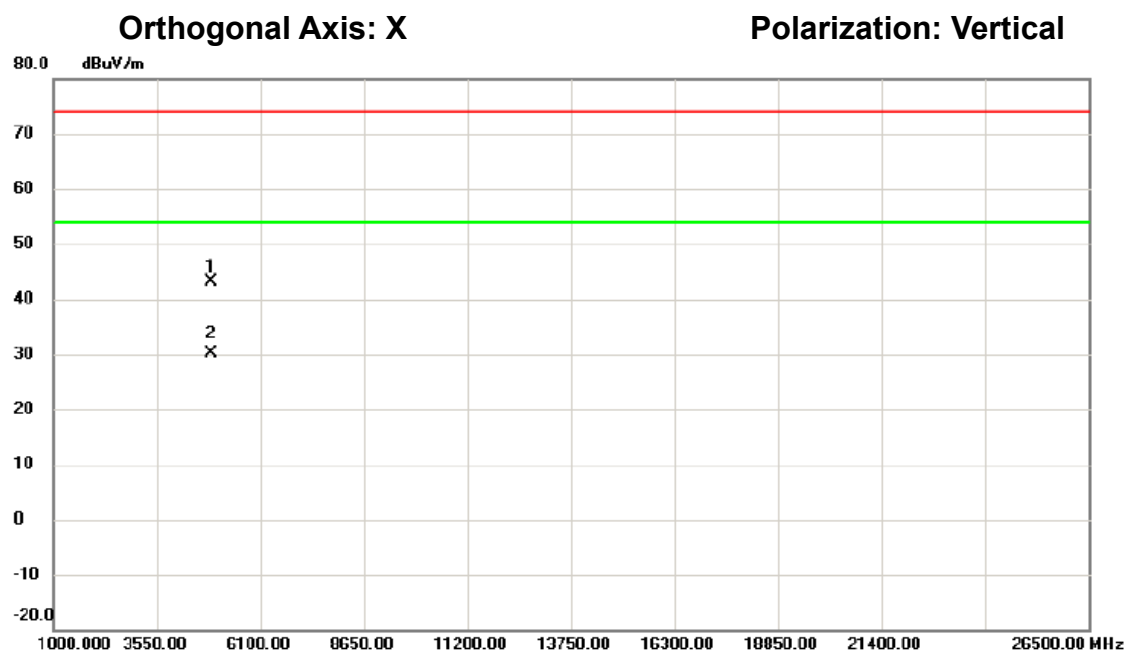

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4902.675	39.49	3.74	43.23	74.00	-30.77	peak	
2	*	4905.195	26.44	3.74	30.18	54.00	-23.82	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/08/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

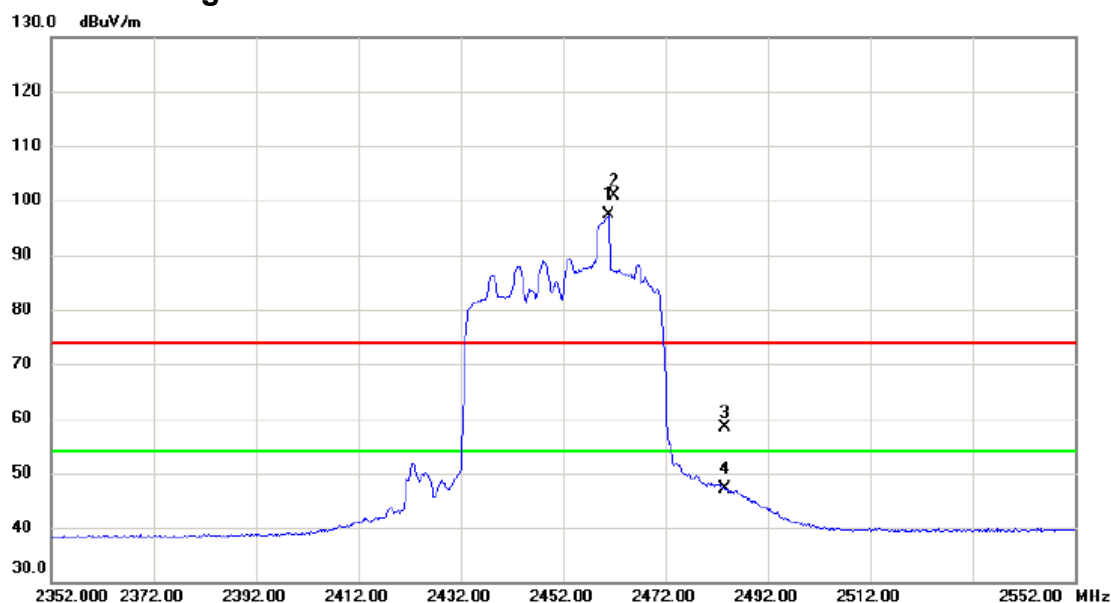

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2461.000	89.87	7.39	97.26	54.00	43.26	AVG	主波訊號不予判定
2	X	2462.100	93.48	7.39	100.87	74.00	26.87	peak	主波訊號不予判定
3		2483.500	50.99	7.47	58.46	74.00	-15.54	peak	
4		2483.500	39.67	7.47	47.14	54.00	-6.86	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/07

環境溫度: 24°C

環境濕度: 52%

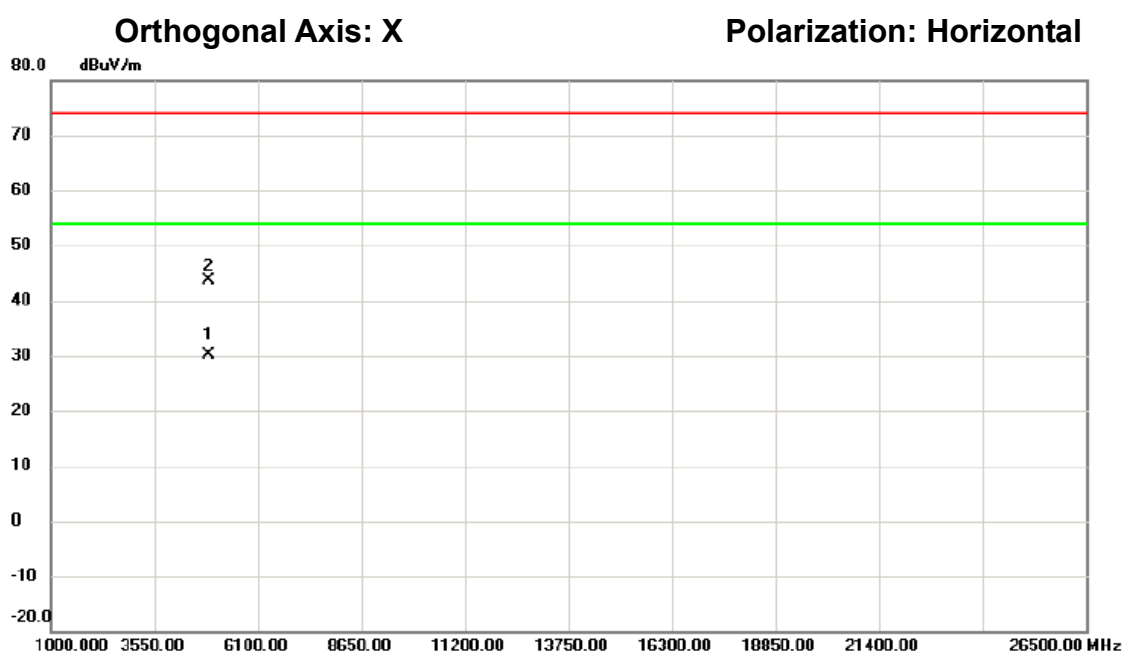


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4903.977	26.45	3.74	30.19	54.00	-23.81	AVG	
2		4906.217	39.99	3.75	43.74	74.00	-30.26	peak	

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Vertical

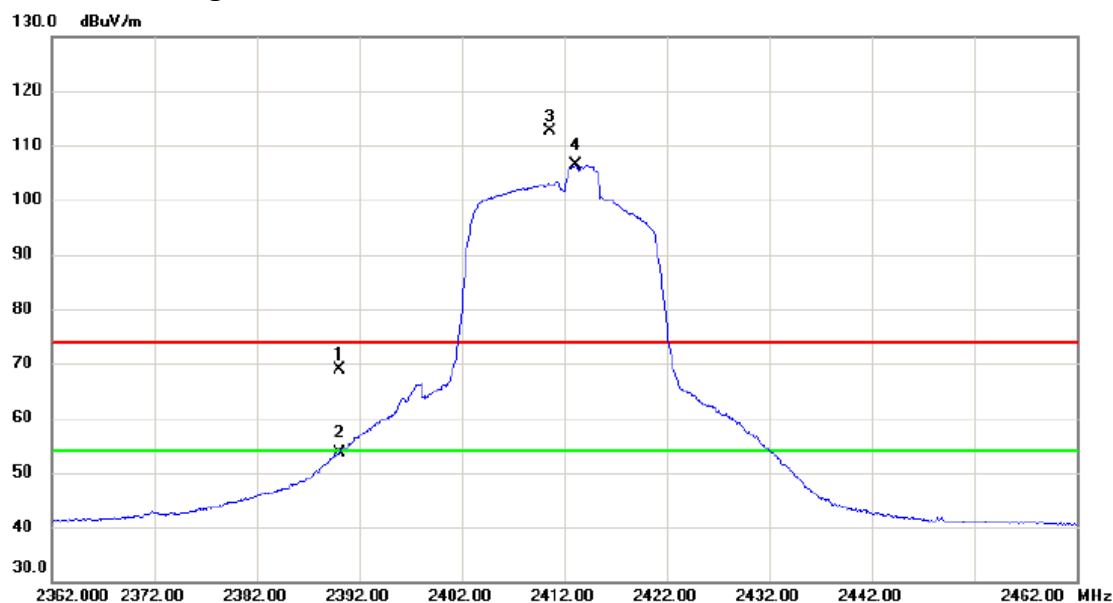

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	61.65	7.17	68.82	74.00	-5.18	peak	
2		2390.000	46.48	7.17	53.65	54.00	-0.35	AVG	
3	X	2410.600	105.46	7.24	112.70	74.00	38.70	peak	主波訊號不予判定
4	*	2413.200	99.03	7.24	106.27	54.00	52.27	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

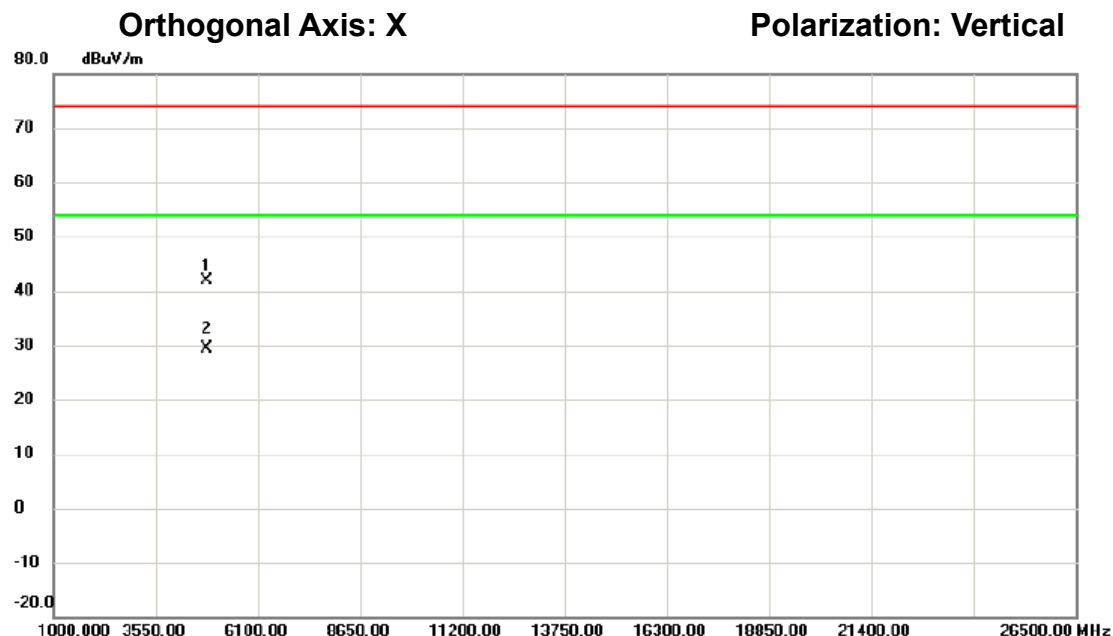


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4822.542	38.52	3.44	41.96	74.00	-32.04	peak	
2	*	4822.585	25.95	3.44	29.39	54.00	-24.61	AVG	

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Horizontal

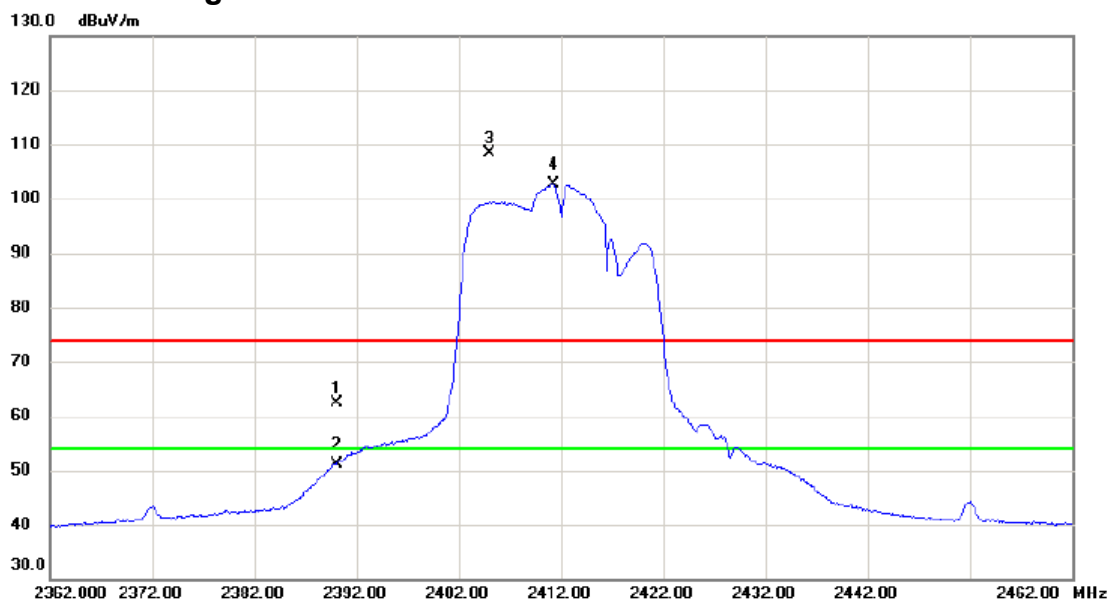

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.24	7.17	62.41	74.00	-11.59	peak	
2		2390.000	44.06	7.17	51.23	54.00	-2.77	AVG	
3	X	2404.950	101.11	7.21	108.32	74.00	34.32	peak	主波訊號不予判定
4	*	2411.250	95.46	7.24	102.70	54.00	48.70	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

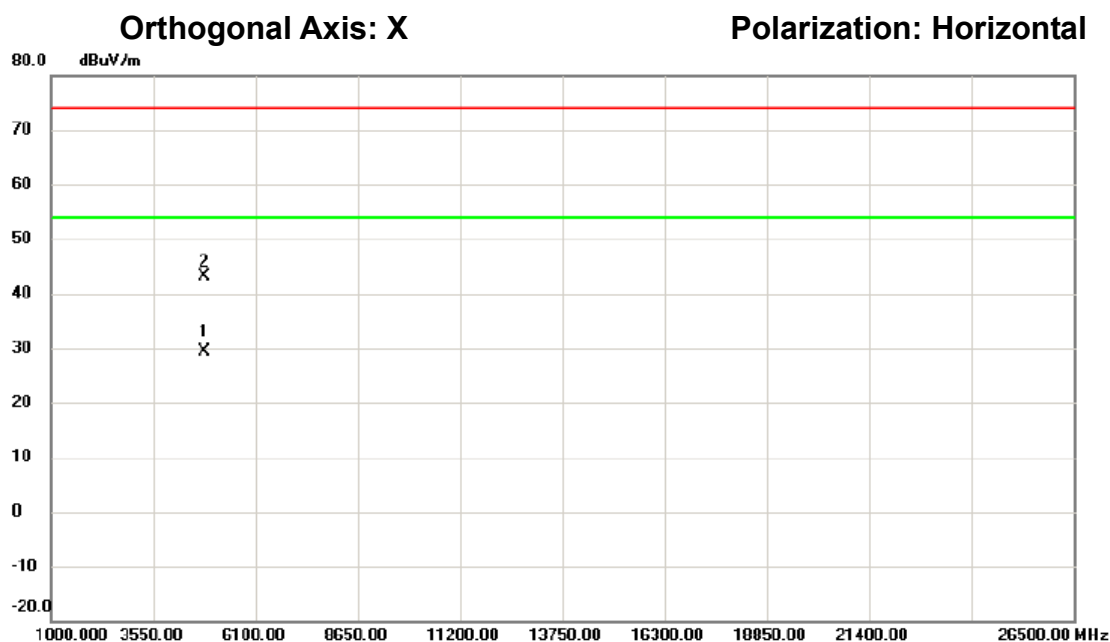

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4822.127	25.96	3.44	29.40	54.00	-24.60	AVG	
2		4824.953	39.65	3.45	43.10	74.00	-30.90	peak	

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

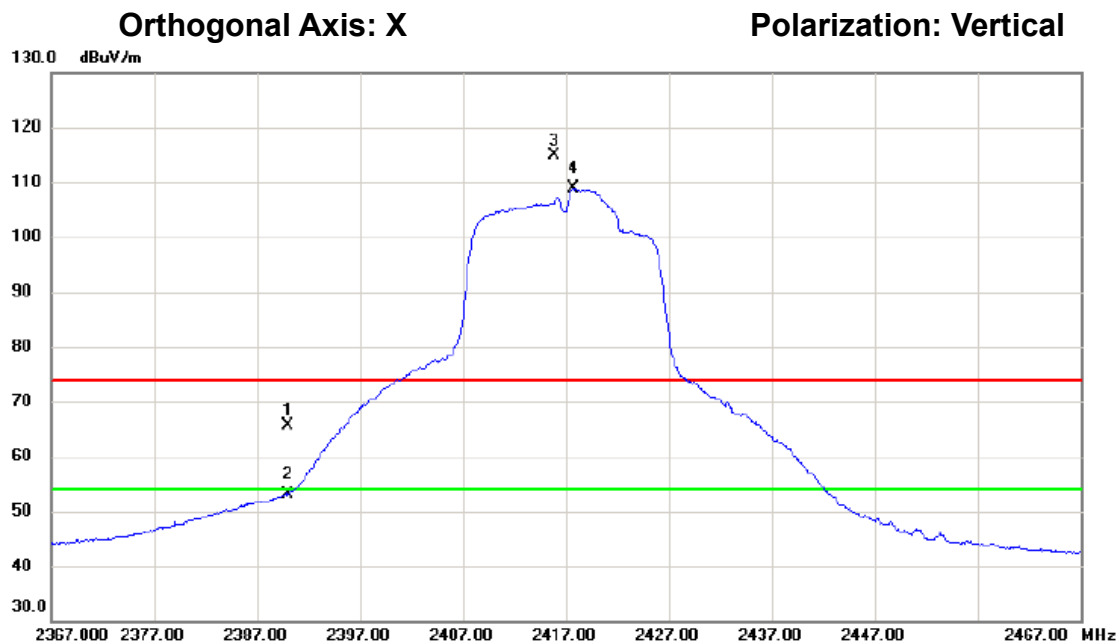

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.37	7.17	65.54	74.00	-8.46	peak	
2		2390.000	45.99	7.17	53.16	54.00	-0.84	AVG	
3	X	2415.850	107.51	7.25	114.76	74.00	40.76	peak	主波訊號不予判定
4	*	2417.700	101.57	7.26	108.83	54.00	54.83	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

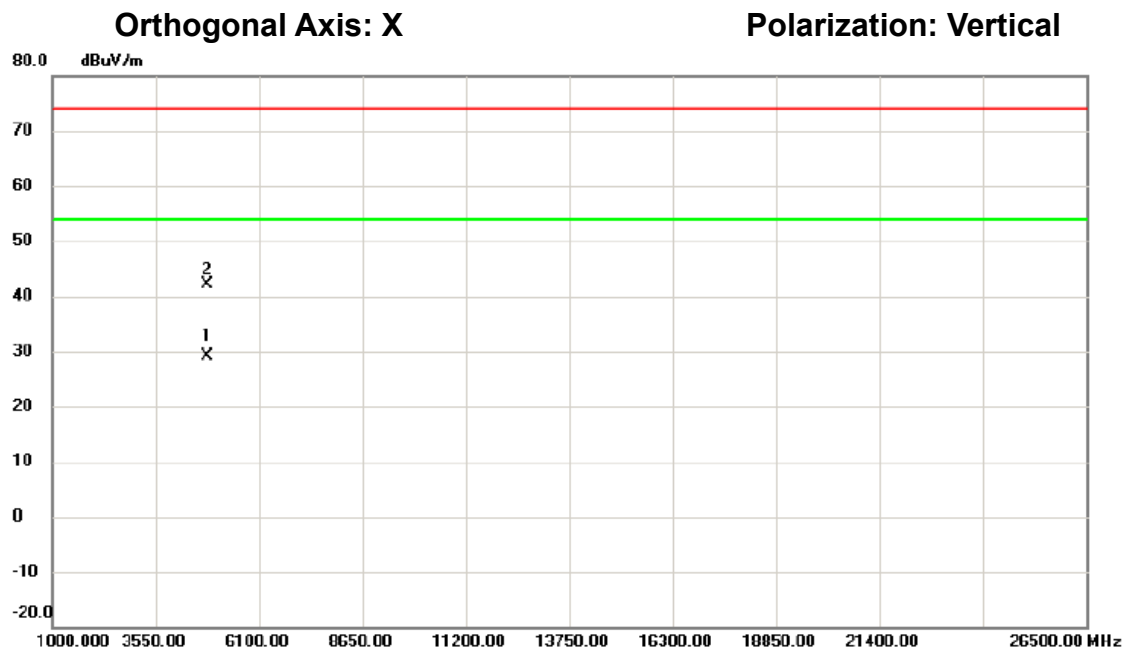


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4831.663	25.76	3.47	29.23	54.00	-24.77	AVG	
2		4832.470	38.69	3.47	42.16	74.00	-31.84	peak	

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Horizontal

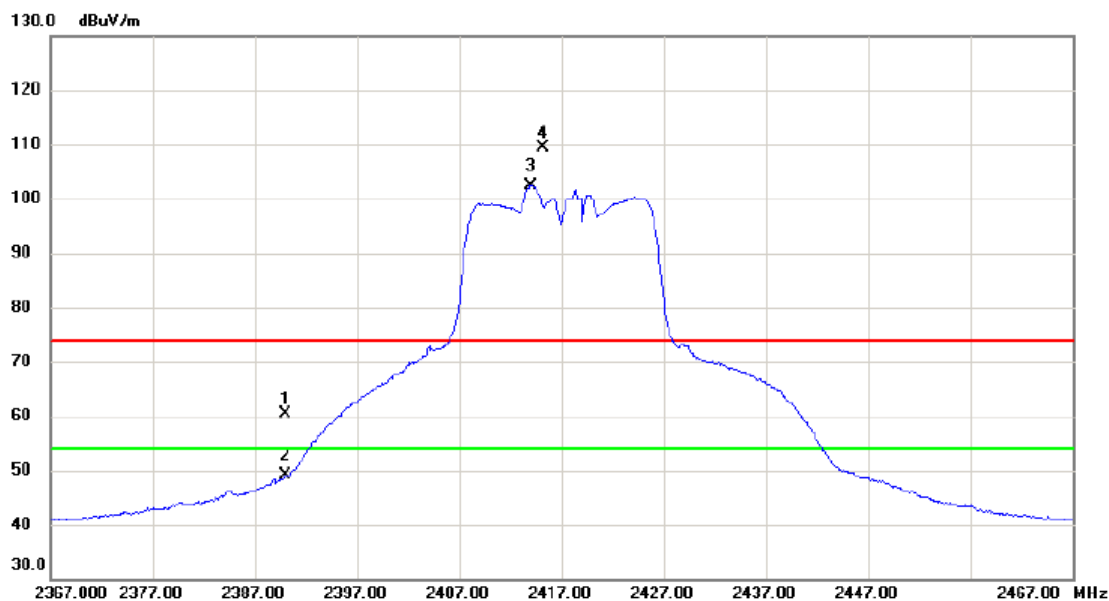

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	53.23	7.17	60.40	74.00	-13.60	peak	
2		2390.000	41.90	7.17	49.07	54.00	-4.93	AVG	
3	*	2414.050	95.20	7.25	102.45	54.00	48.45	AVG	主波訊號不予判定
4	X	2415.200	102.20	7.25	109.45	74.00	35.45	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

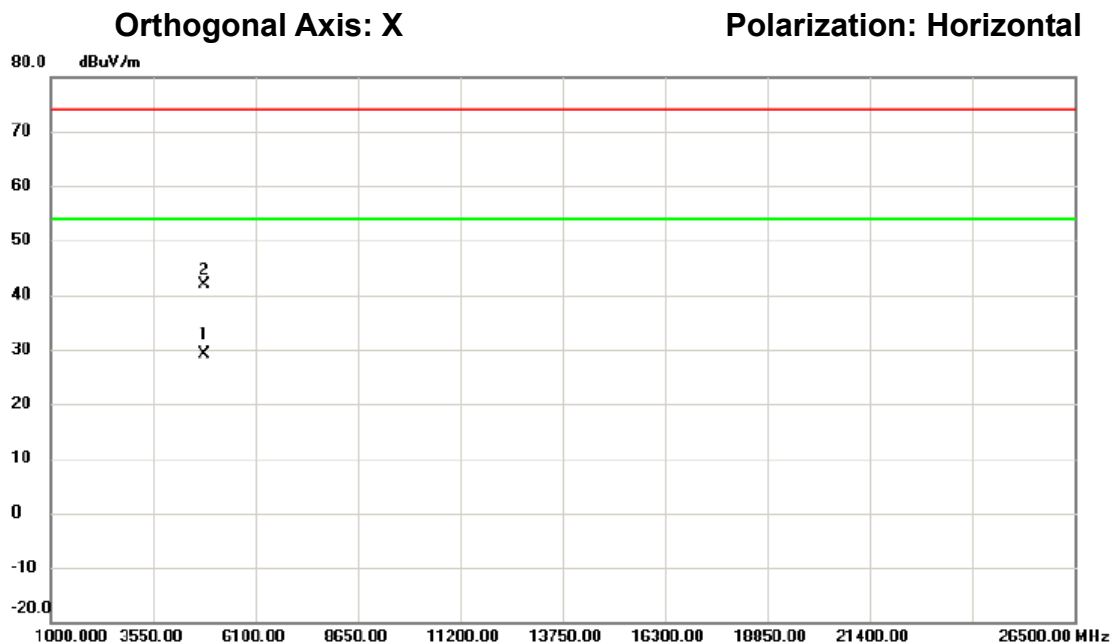

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4831.500	25.68	3.47	29.15	54.00	-24.85	AVG	
2		4833.055	38.49	3.48	41.97	74.00	-32.03	peak	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

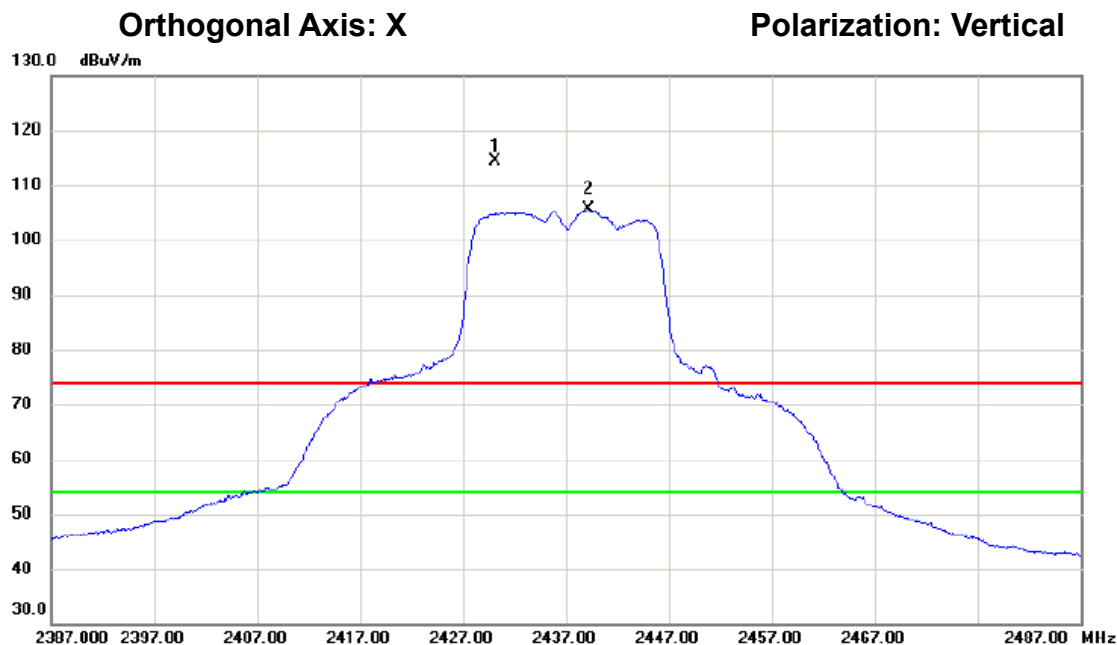

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2430.150	107.04	7.30	114.34	74.00	40.34	peak	主波訊號不予判定
2	*	2439.250	98.20	7.32	105.52	54.00	51.52	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

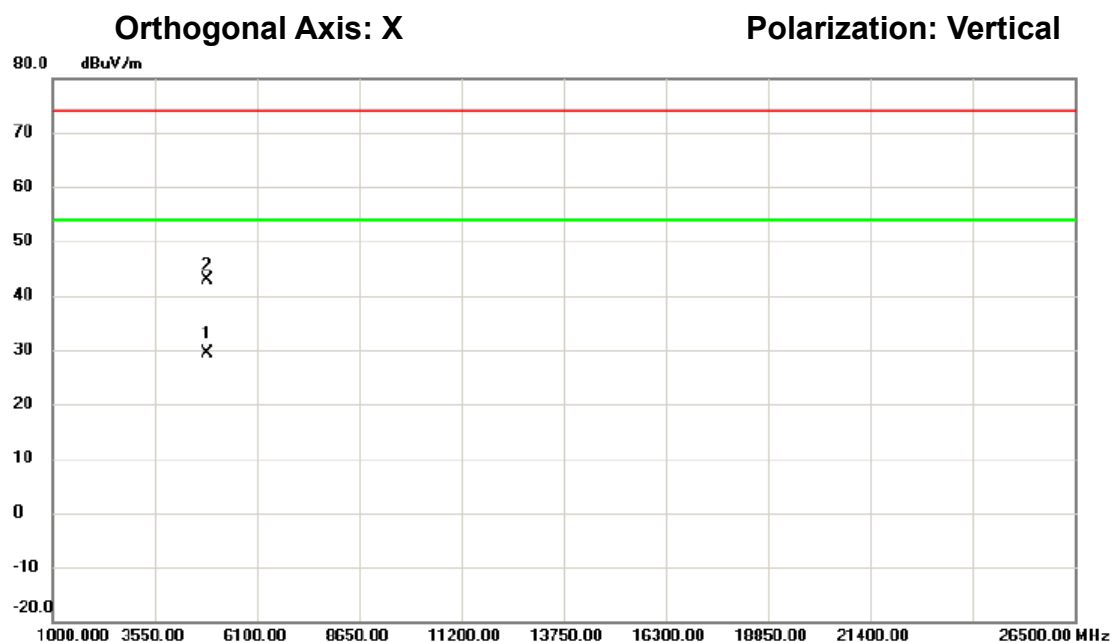

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4871.557	25.81	3.62	29.43	54.00	-24.57	AVG	
2		4874.840	39.27	3.62	42.89	74.00	-31.11	peak	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

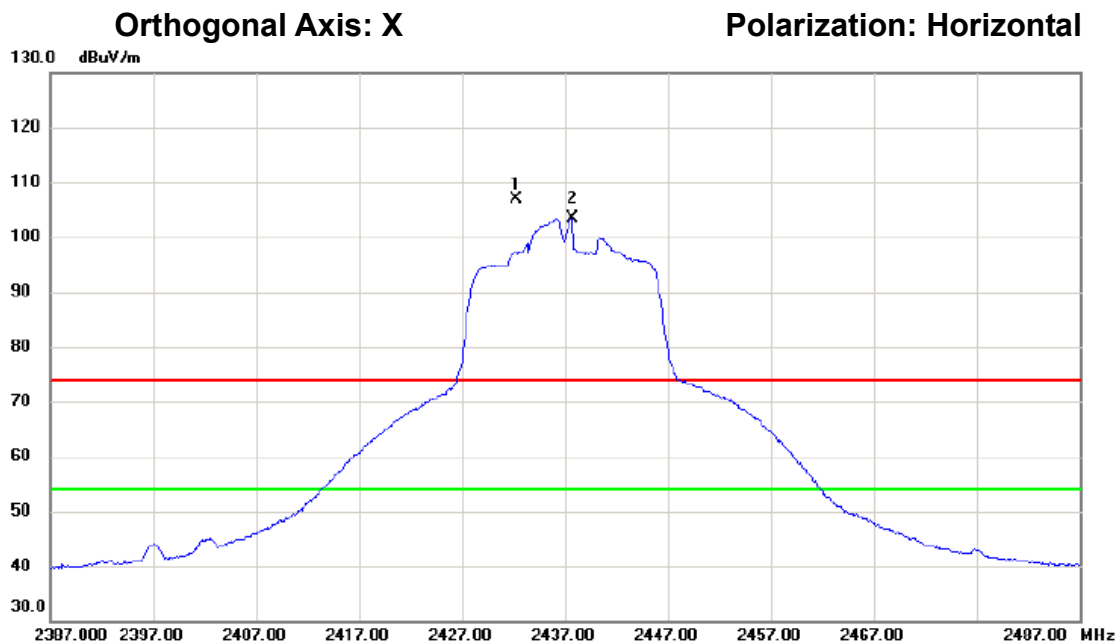

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2432.250	99.70	7.29	106.99	74.00	32.99	peak	主波訊號不予判定
2	*	2437.750	96.13	7.32	103.45	54.00	49.45	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

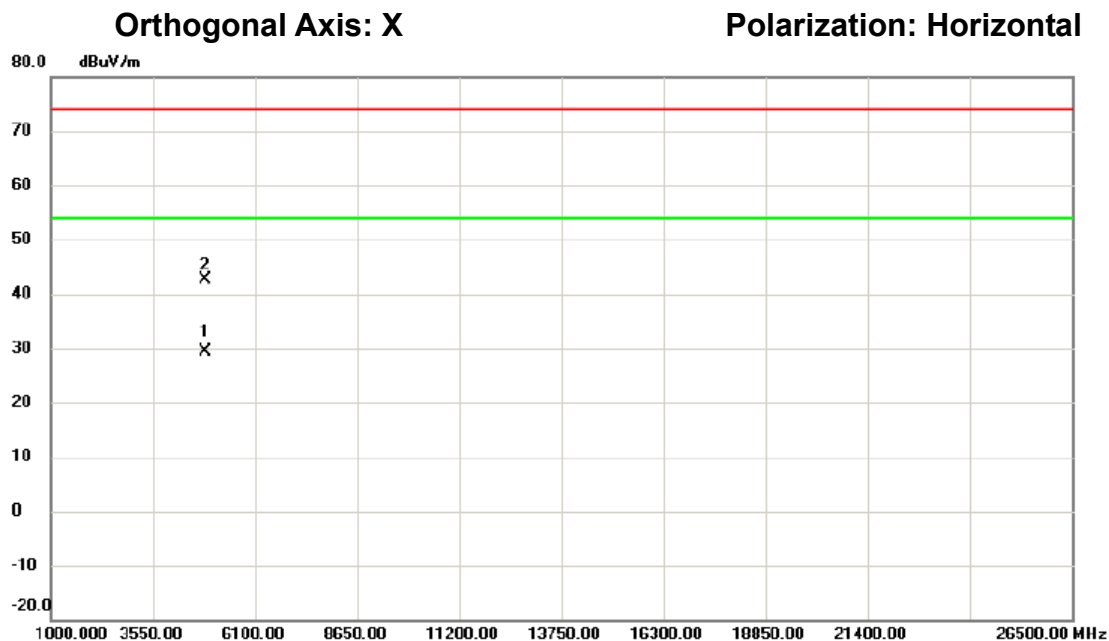


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4872.137	25.86	3.62	29.48	54.00	-24.52	AVG	
2		4873.568	39.01	3.62	42.63	74.00	-31.37	peak	

測試頻道: IEEE vht20 / 2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 24°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/08/03
環境濕度: 52%

Orthogonal Axis: X


Polarization: Vertical

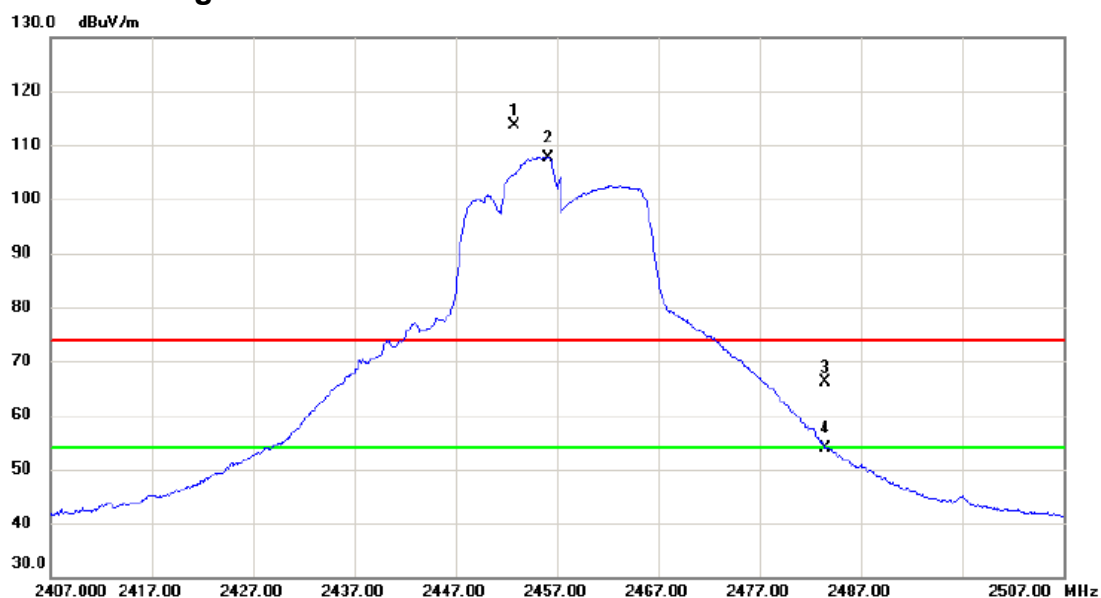

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2452.800	106.26	7.37	113.63	74.00	39.63	peak	主波訊號不予判定
2	*	2456.200	100.30	7.38	107.68	54.00	53.68	AVG	主波訊號不予判定
3		2483.500	58.61	7.47	66.08	74.00	-7.92	peak	
4		2483.500	46.33	7.47	53.80	54.00	-0.20	AVG	

測試頻道: IEEE vht20 / 2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 24°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/08/07
環境濕度: 52%

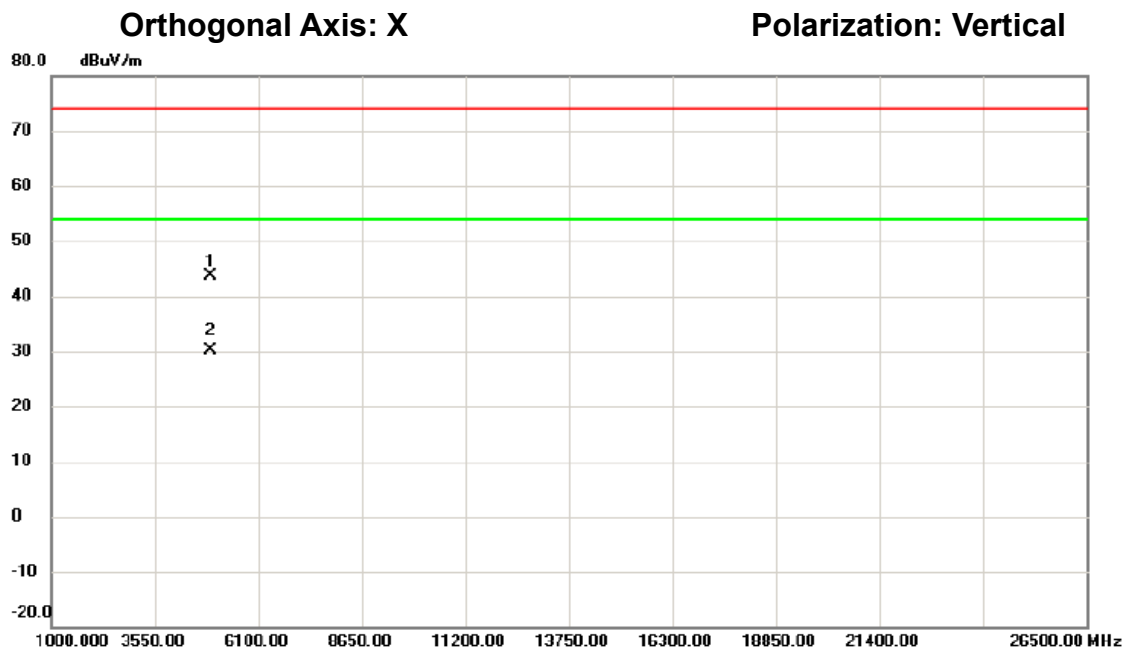

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4915.252	39.81	3.78	43.59	74.00	-30.41	peak	
2	*	4915.690	26.46	3.78	30.24	54.00	-23.76	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

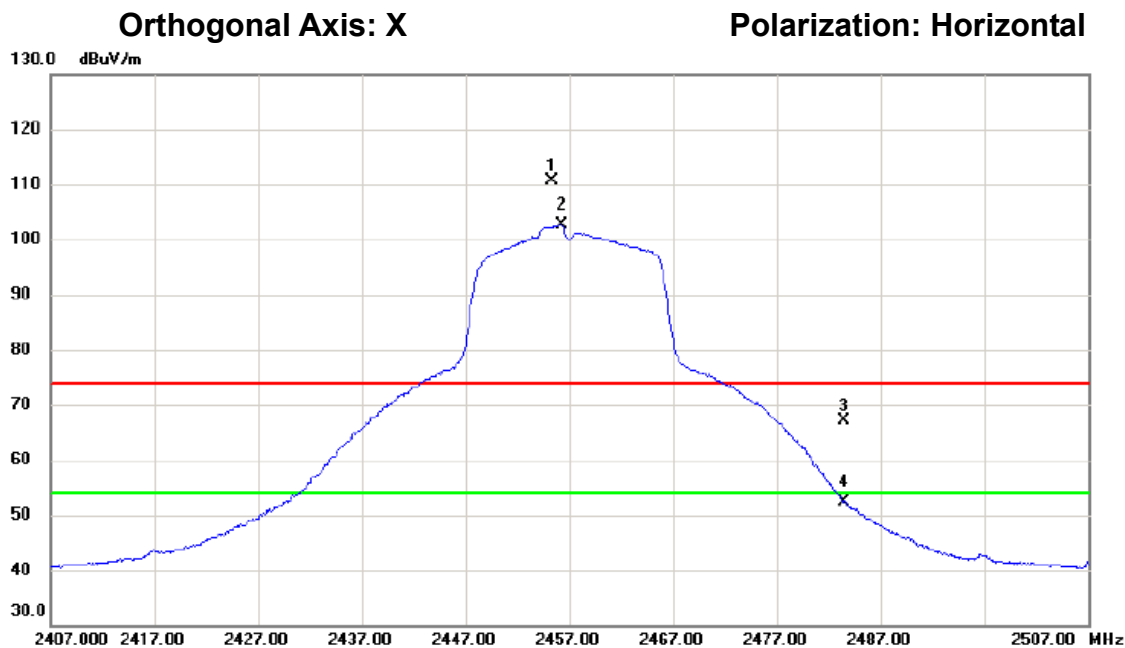

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2455.350	103.37	7.37	110.74	74.00	36.74	peak	主波訊號不予判定
2	*	2456.300	95.34	7.38	102.72	54.00	48.72	AVG	主波訊號不予判定
3		2483.500	59.69	7.47	67.16	74.00	-6.84	peak	
4		2483.500	44.86	7.47	52.33	54.00	-1.67	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

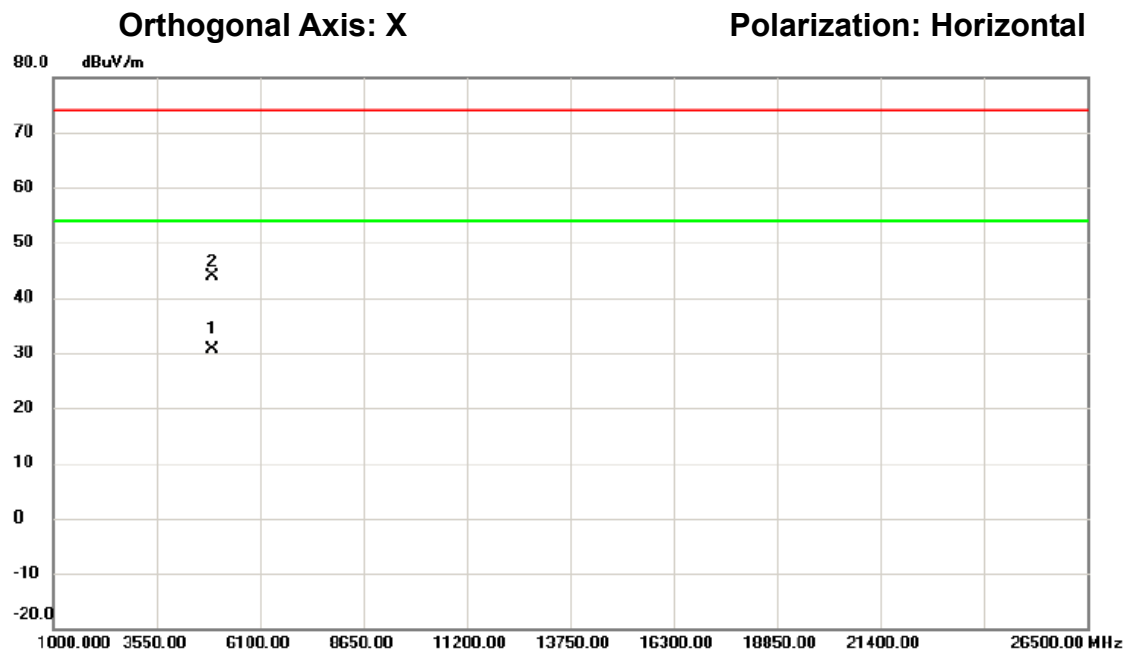


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4912.252	26.96	3.76	30.72	54.00	-23.28	AVG	
2		4915.145	40.05	3.78	43.83	74.00	-30.17	peak	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Vertical

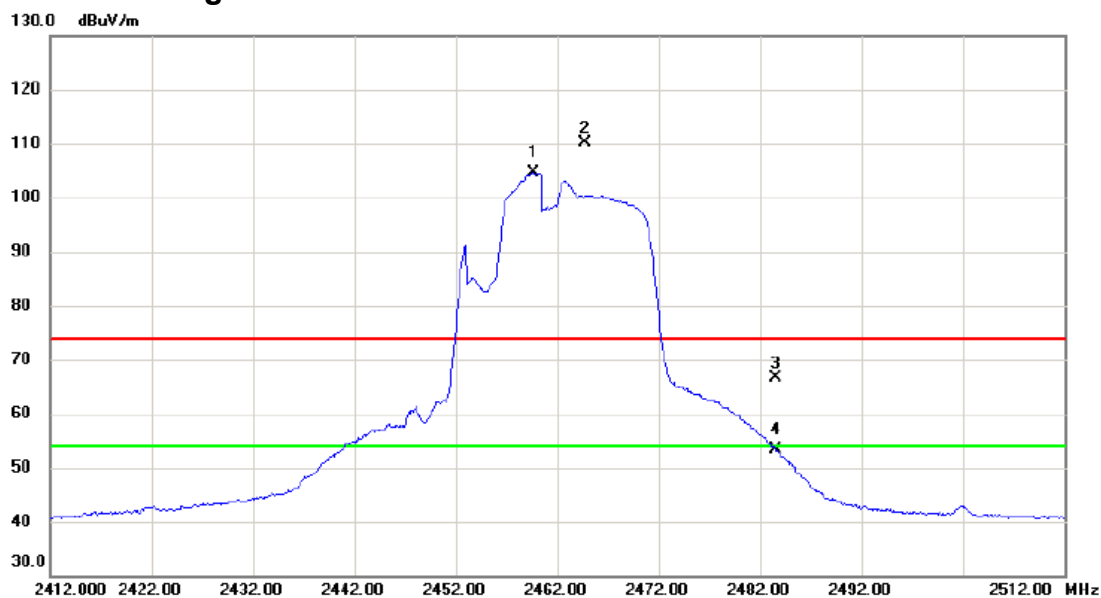

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.700	97.20	7.39	104.59	54.00	50.59	AVG	主波訊號不予判定
2	X	2464.750	102.62	7.40	110.02	74.00	36.02	peak	主波訊號不予判定
3		2483.500	59.11	7.47	66.58	74.00	-7.42	peak	
4		2483.500	45.94	7.47	53.41	54.00	-0.59	AVG	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

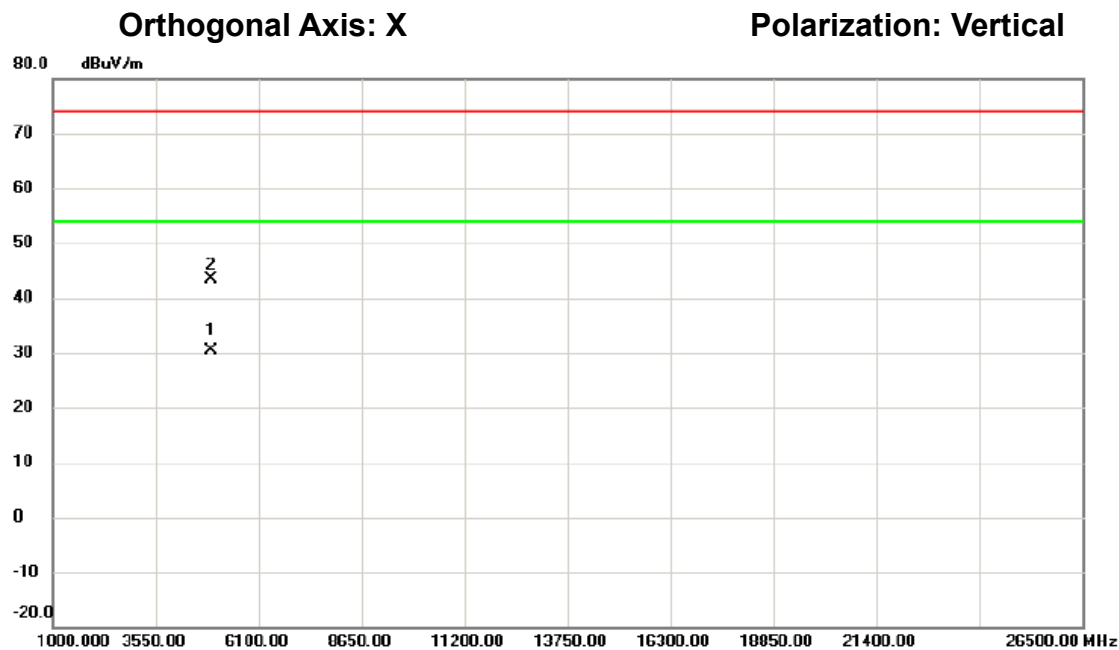

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4922.762	26.52	3.81	30.33	54.00	-23.67	AVG	
2		4923.587	39.66	3.81	43.47	74.00	-30.53	peak	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

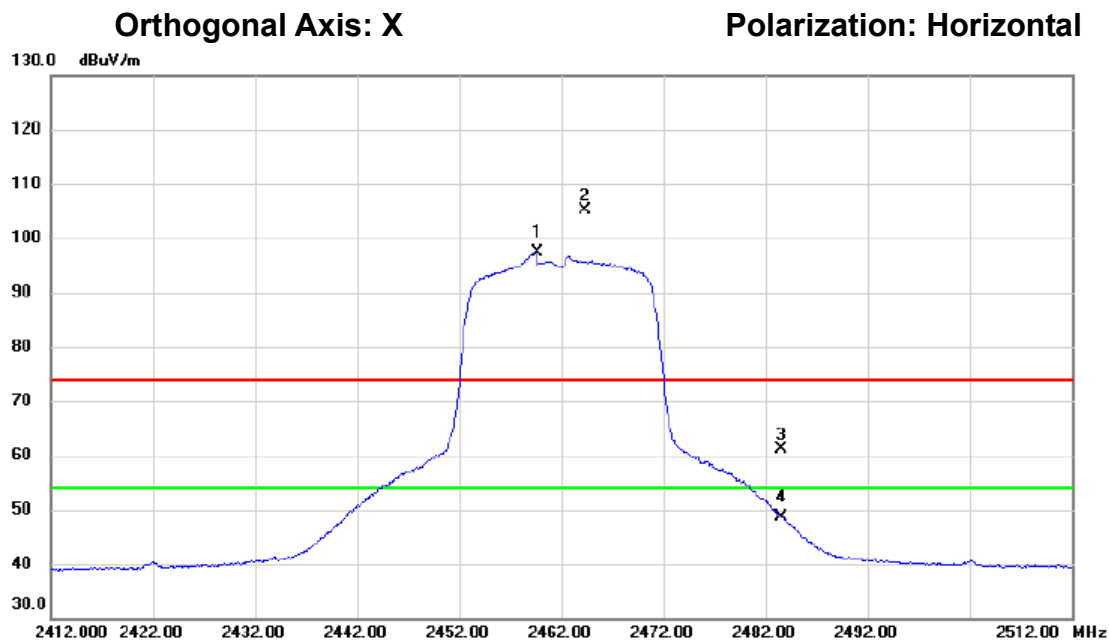

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.650	89.94	7.39	97.33	54.00	43.33	AVG	主波訊號不予判定
2	X	2464.350	97.70	7.40	105.10	74.00	31.10	peak	主波訊號不予判定
3		2483.500	53.59	7.47	61.06	74.00	-12.94	peak	
4		2483.500	41.19	7.47	48.66	54.00	-5.34	AVG	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

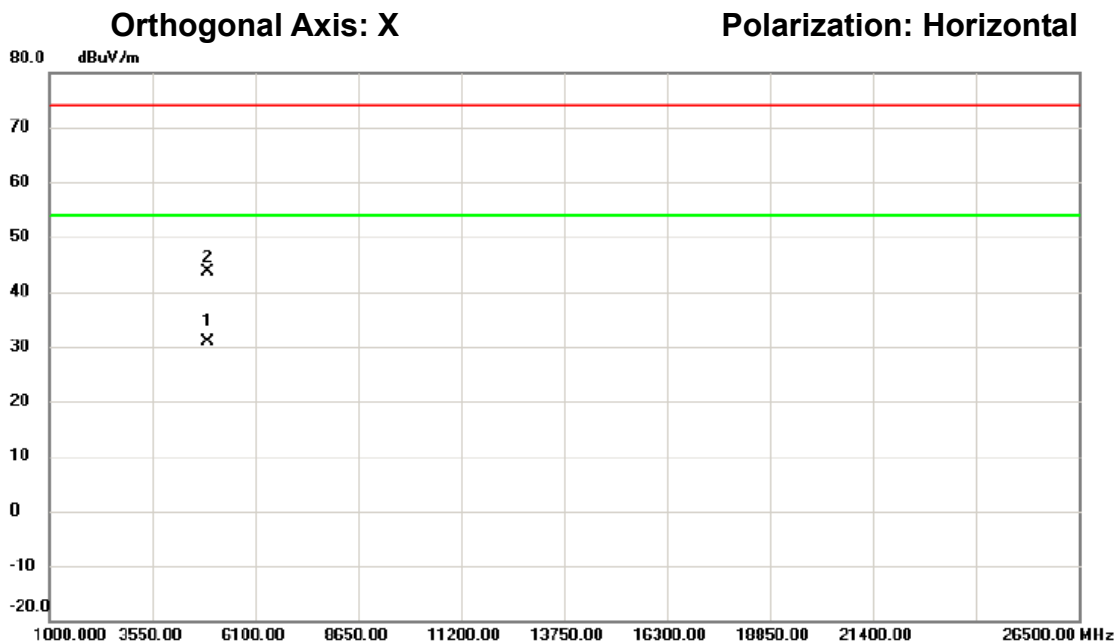


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4921.703	27.18	3.81	30.99	54.00	-23.01	AVG	
2		4925.135	39.77	3.82	43.59	74.00	-30.41	peak	

測試頻道: IEEE vht40 / 2422 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 24°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/08/03
環境濕度: 52%

Orthogonal Axis: X


Polarization: Vertical

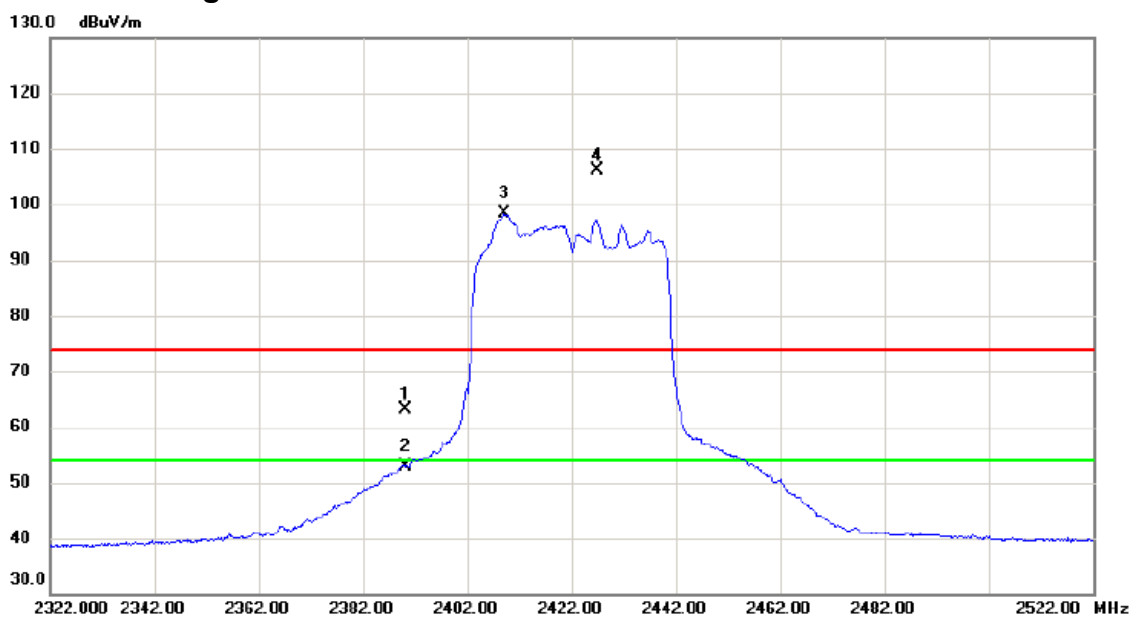

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.85	7.17	63.02	74.00	-10.98	peak	
2		2390.000	45.80	7.17	52.97	54.00	-1.03	AVG	
3	*	2409.200	91.07	7.23	98.30	54.00	44.30	AVG	主波訊號不予判定
4	X	2427.000	98.95	7.29	106.24	74.00	32.24	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

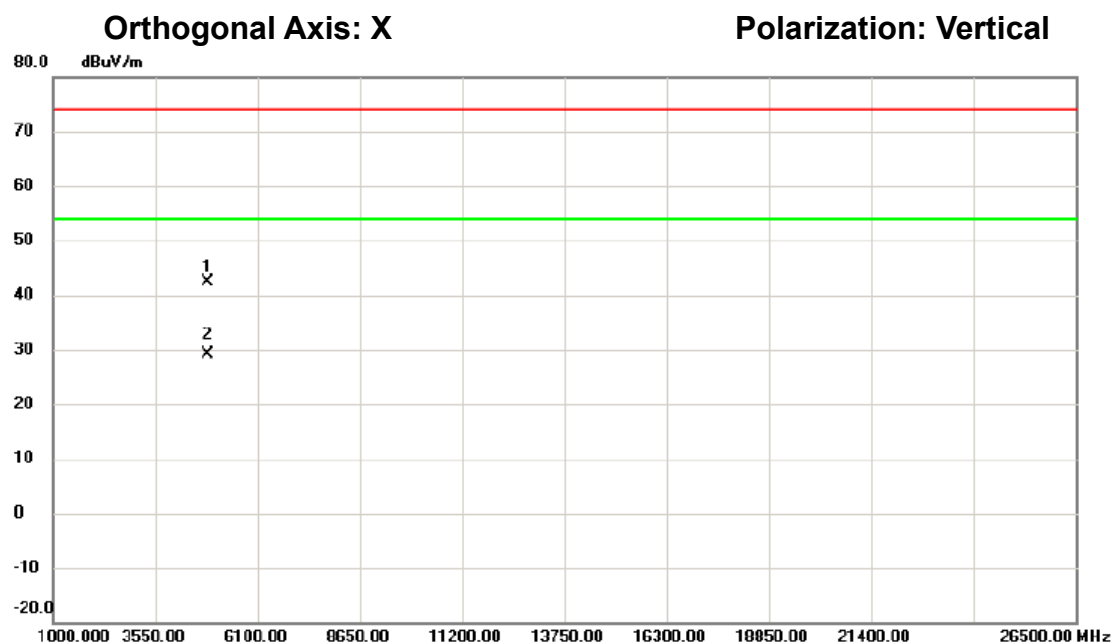


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4843.260	38.89	3.52	42.41	74.00	-31.59	peak	
2	*	4843.852	25.61	3.52	29.13	54.00	-24.87	AVG	

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Horizontal

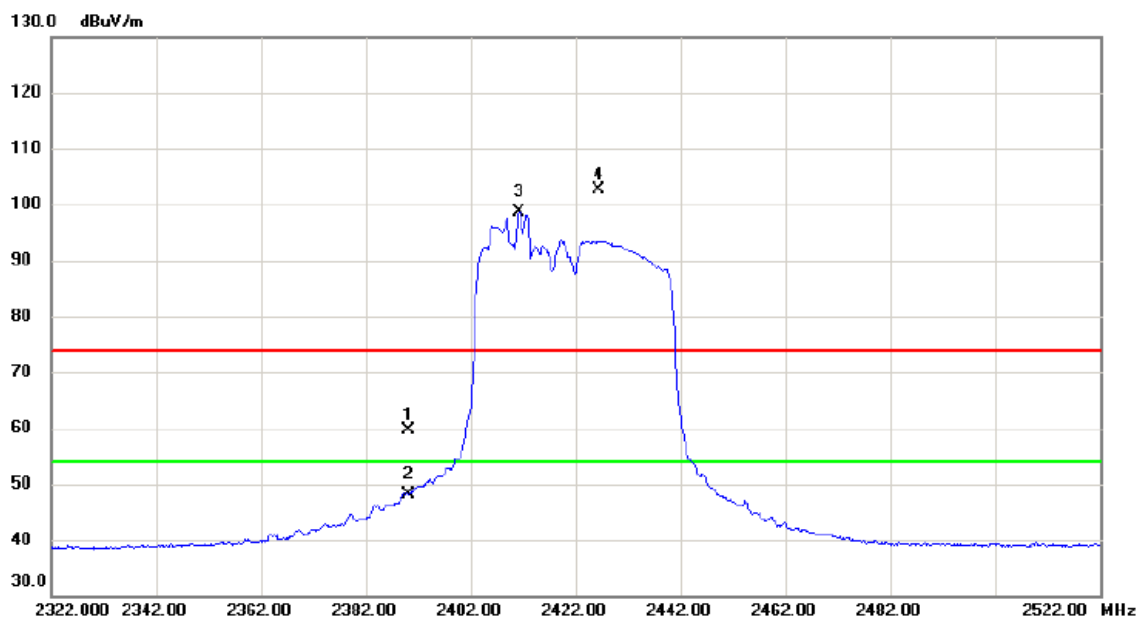

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	52.36	7.17	59.53	74.00	-14.47	peak	
2		2390.000	40.89	7.17	48.06	54.00	-5.94	AVG	
3	*	2411.300	91.49	7.24	98.73	54.00	44.73	AVG	主波訊號不予判定
4	X	2426.500	95.27	7.29	102.56	74.00	28.56	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

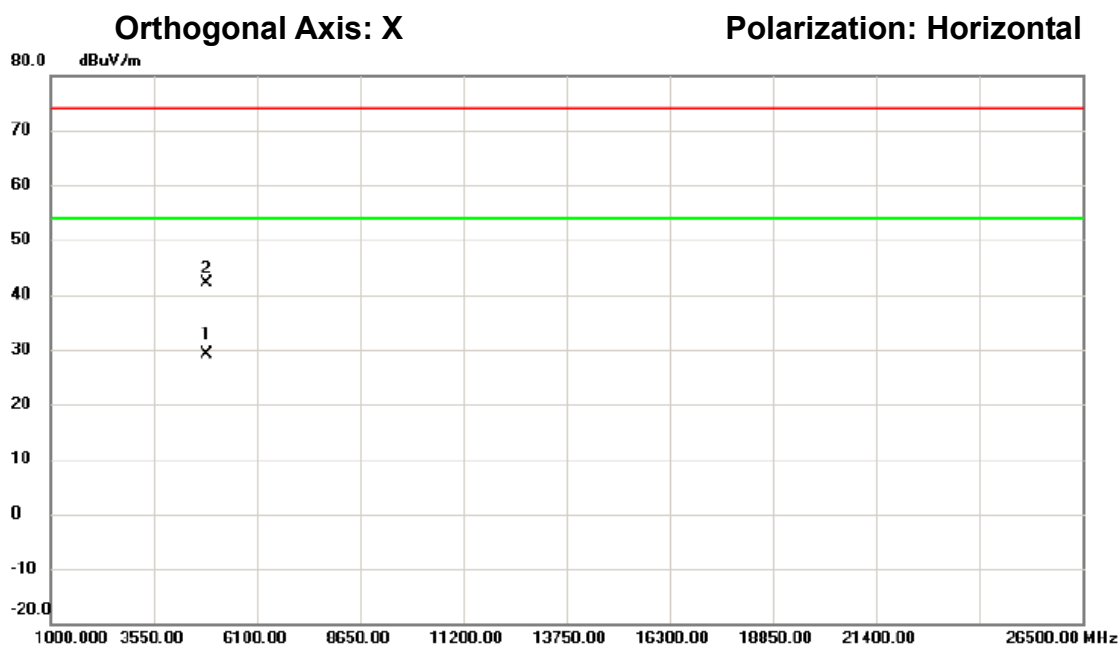

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4842.850	25.60	3.52	29.12	54.00	-24.88	AVG	
2		4845.507	38.64	3.53	42.17	74.00	-31.83	peak	

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

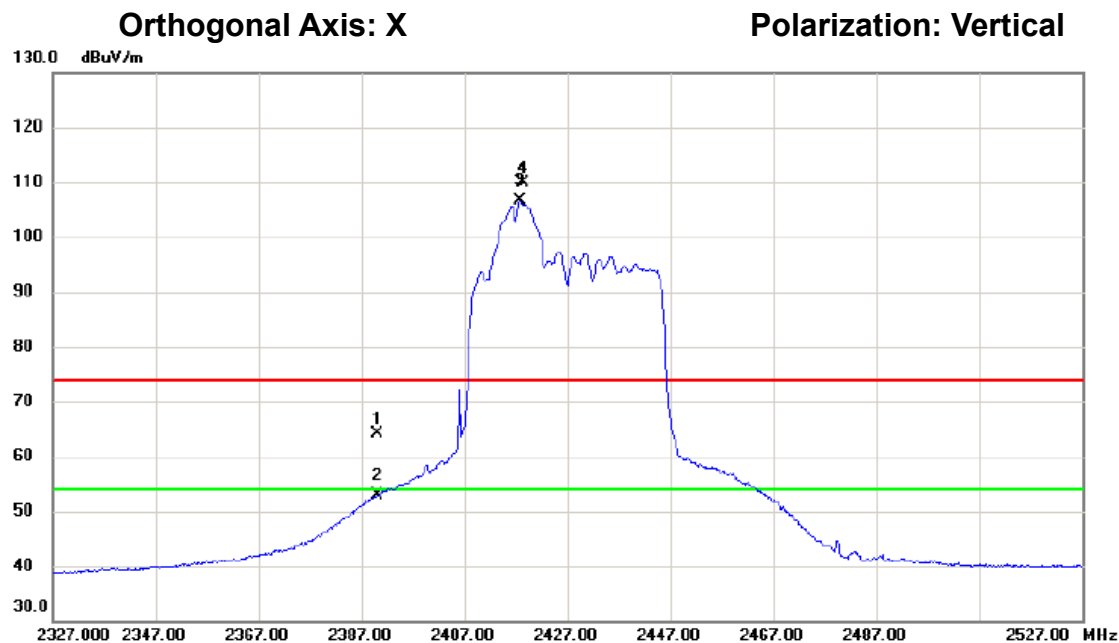

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.88	7.17	64.05	74.00	-9.95	peak	
2		2390.000	45.60	7.17	52.77	54.00	-1.23	AVG	
3	*	2417.800	99.25	7.26	106.51	54.00	52.51	AVG	主波訊號不予判定
4	X	2418.300	102.57	7.26	109.83	74.00	35.83	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

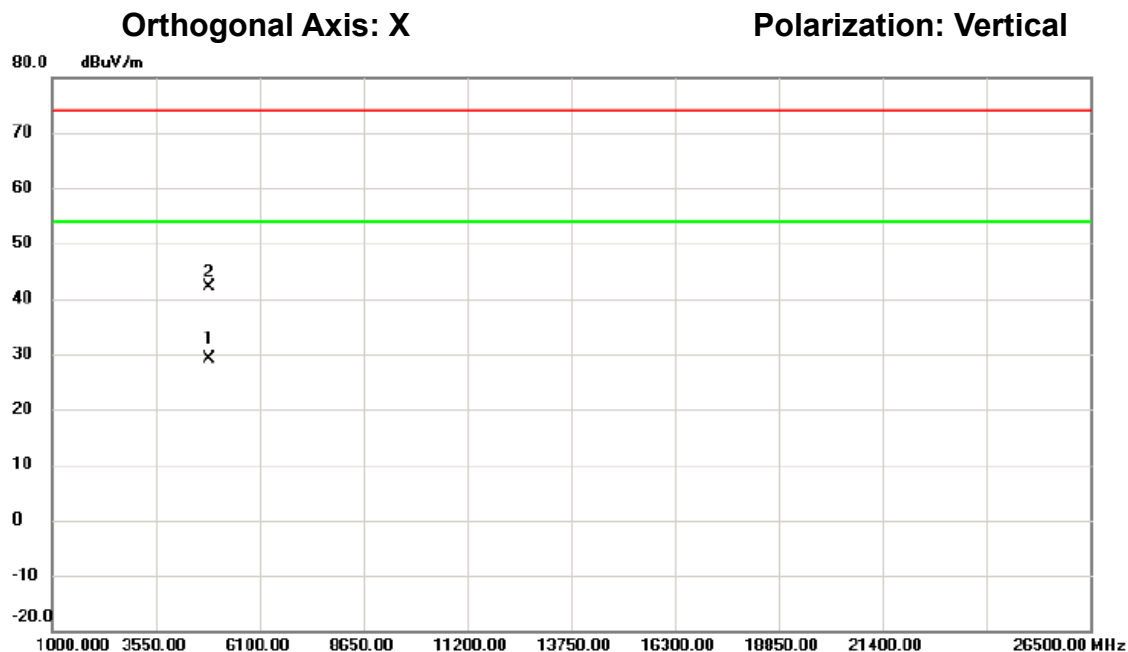

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4852.887	25.60	3.55	29.15	54.00	-24.85	AVG	
2		4852.948	38.59	3.55	42.14	74.00	-31.86	peak	

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.90	7.17	63.07	74.00	-10.93	peak	
2		2390.000	41.05	7.17	48.22	54.00	-5.78	AVG	
3	*	2416.300	96.00	7.25	103.25	54.00	49.25	AVG	主波訊號不予判定
4	X	2418.200	100.01	7.26	107.27	74.00	33.27	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

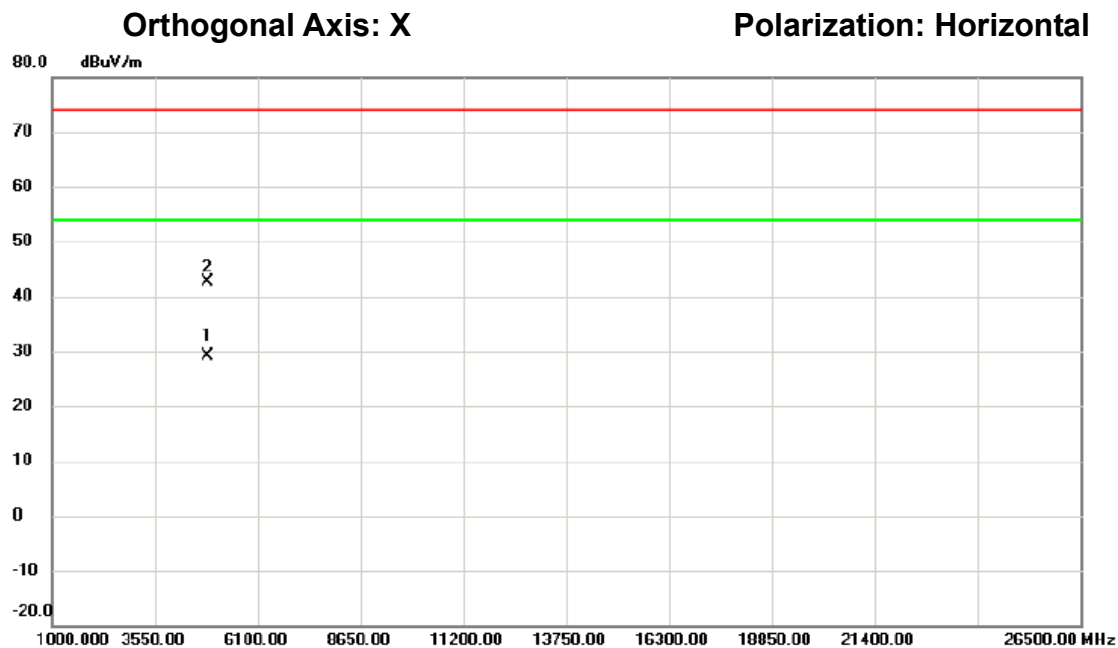

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4851.648	25.49	3.54	29.03	54.00	-24.97	AVG	
2		4852.625	39.10	3.55	42.65	74.00	-31.35	peak	

測試頻道: IEEE vht40 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 24°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/08/03
環境濕度: 52%

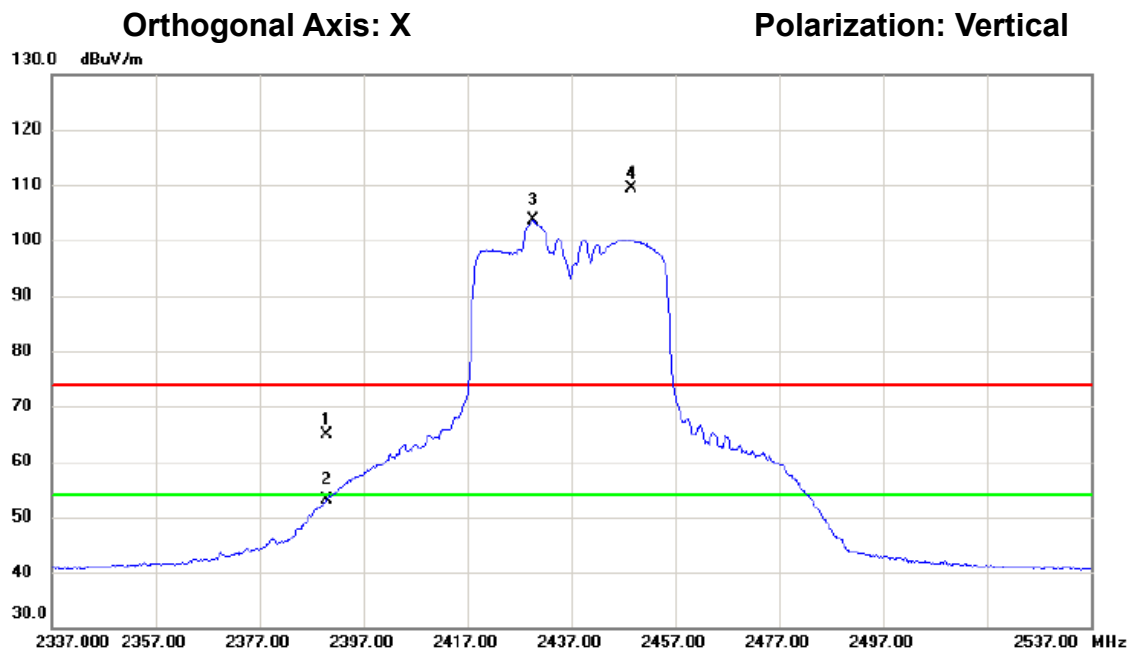

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	57.69	7.17	64.86	74.00	-9.14	peak	
2		2390.000	45.98	7.17	53.15	54.00	-0.85	AVG	
3	*	2429.700	96.29	7.30	103.59	54.00	49.59	AVG	主波訊號不予判定
4	X	2448.600	101.90	7.36	109.26	74.00	35.26	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 24°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/08/07
環境濕度: 52%

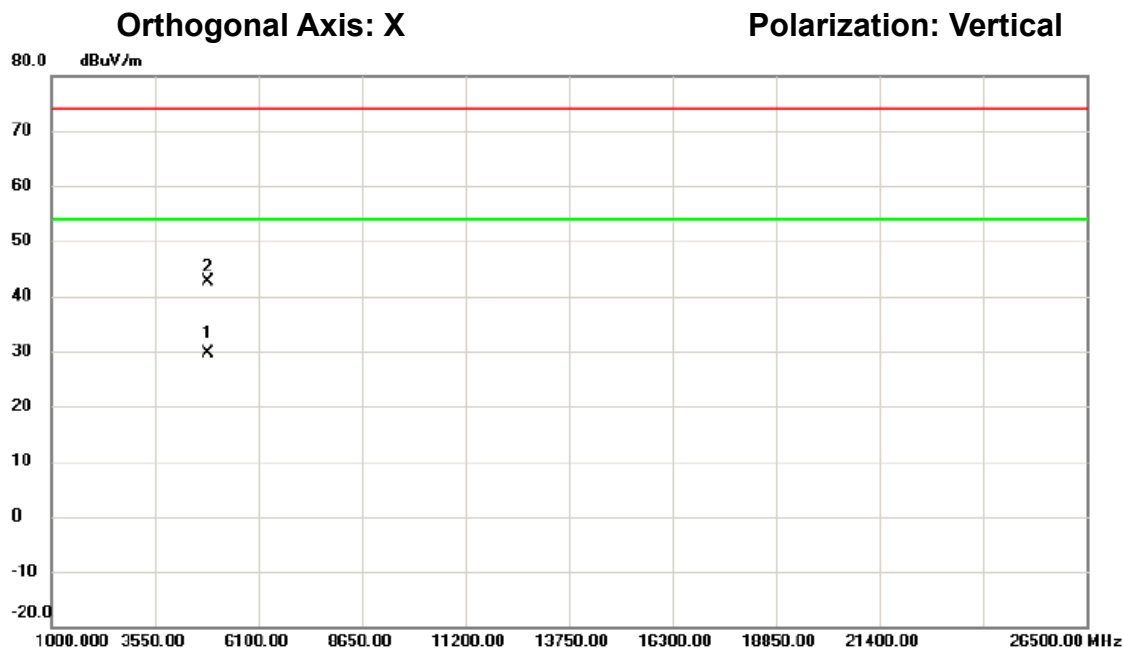

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4871.835	25.94	3.62	29.56	54.00	-24.44	AVG	
2		4872.727	39.10	3.62	42.72	74.00	-31.28	peak	

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

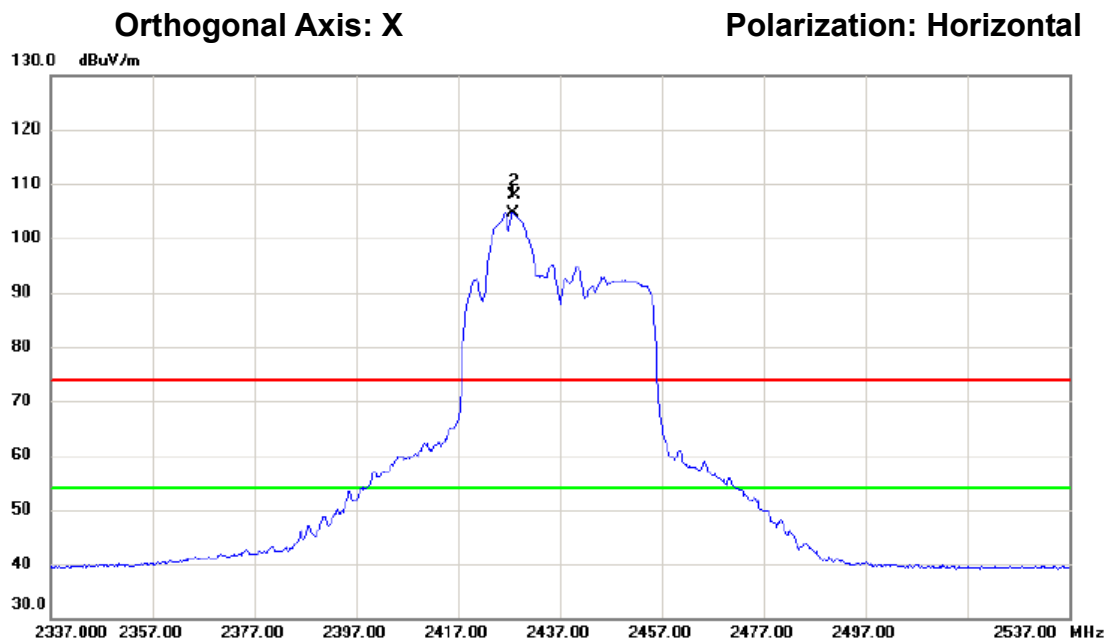

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2427.800	97.43	7.29	104.72	54.00	50.72	AVG	主波訊號不予判定
2	X	2428.200	100.64	7.29	107.93	74.00	33.93	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

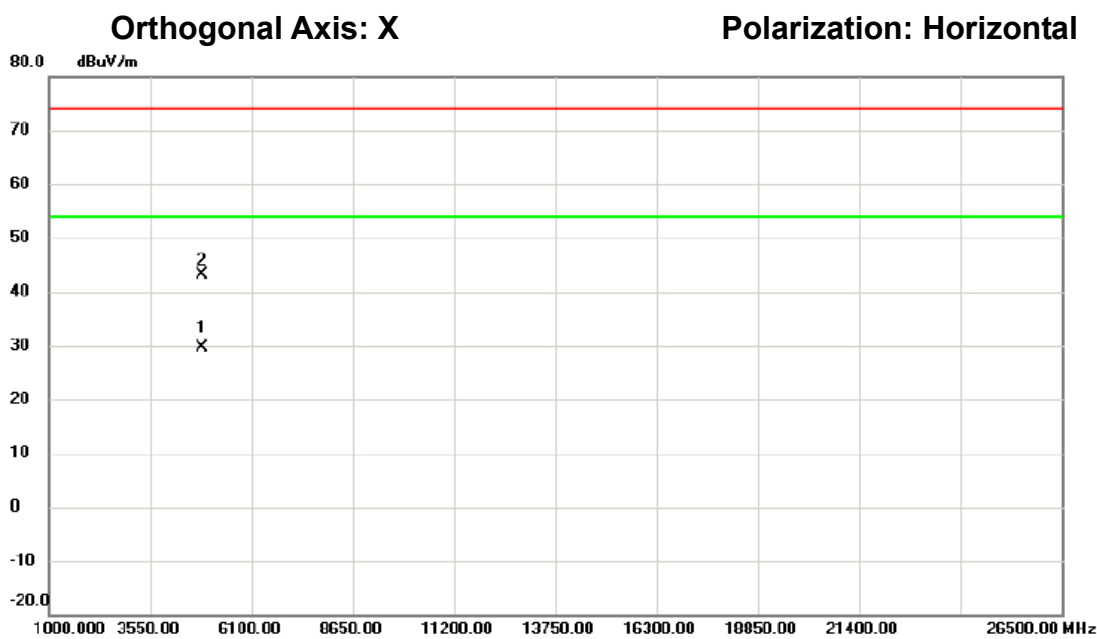


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4871.597	25.91	3.62	29.53	54.00	-24.47	AVG	
2		4872.767	39.40	3.62	43.02	74.00	-30.98	peak	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Vertical

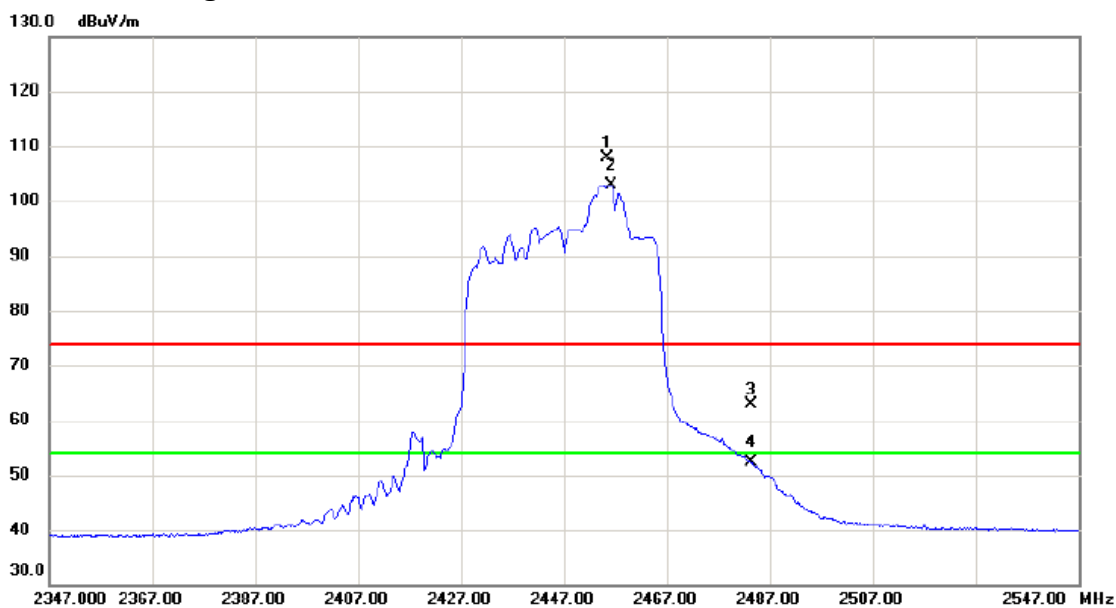

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2455.400	100.45	7.37	107.82	74.00	33.82	peak	主波訊號不予判定
2	*	2456.200	95.55	7.38	102.93	54.00	48.93	AVG	主波訊號不予判定
3		2483.500	55.39	7.47	62.86	74.00	-11.14	peak	
4		2483.500	45.00	7.47	52.47	54.00	-1.53	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

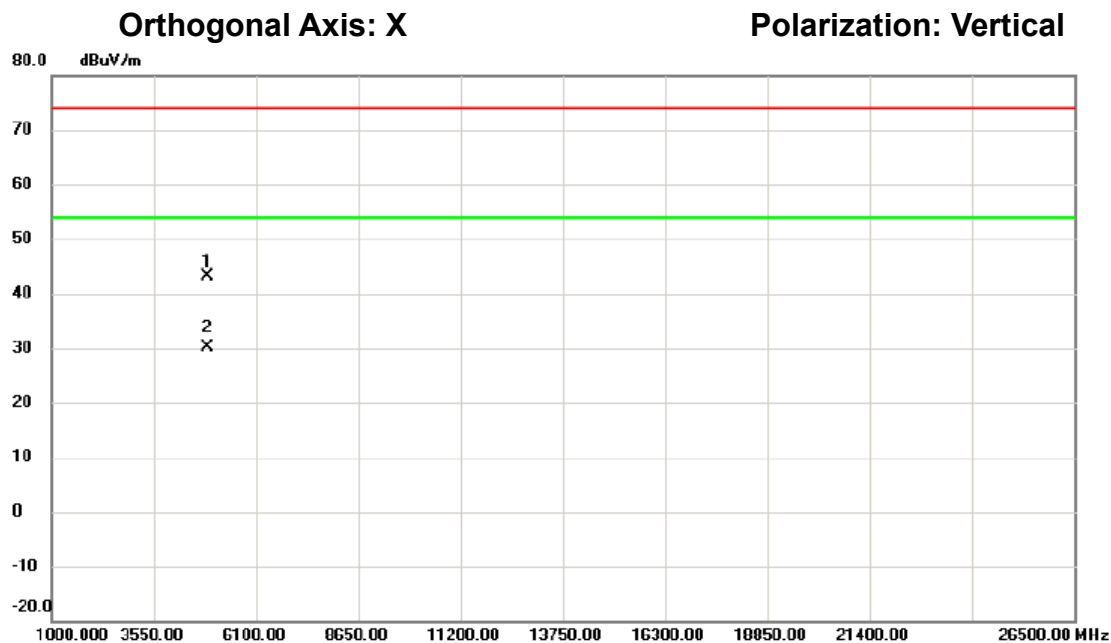

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4891.608	39.33	3.69	43.02	74.00	-30.98	peak	
2	*	4894.783	26.31	3.71	30.02	54.00	-23.98	AVG	

測試頻道: IEEE vht40 / 2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/08/03


環境濕度: 52%

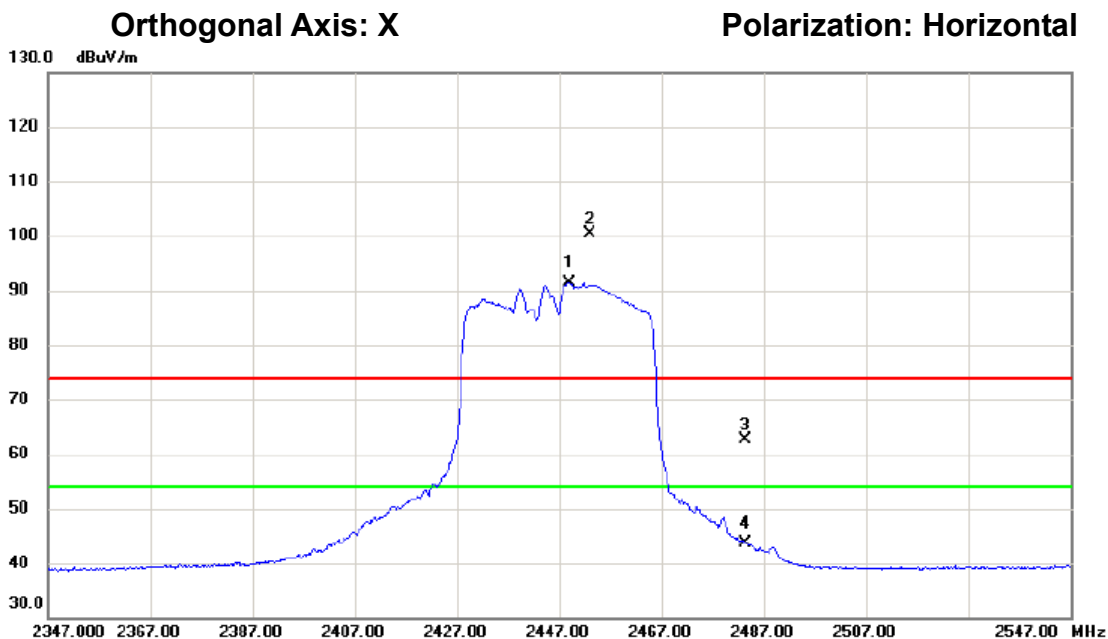

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2449.100	84.00	7.36	91.36	54.00	37.36	AVG	主波訊號不予判定
2	X	2453.000	92.97	7.37	100.34	74.00	26.34	peak	主波訊號不予判定
3		2483.500	55.19	7.47	62.66	74.00	-11.34	peak	
4		2483.500	36.24	7.47	43.71	54.00	-10.29	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

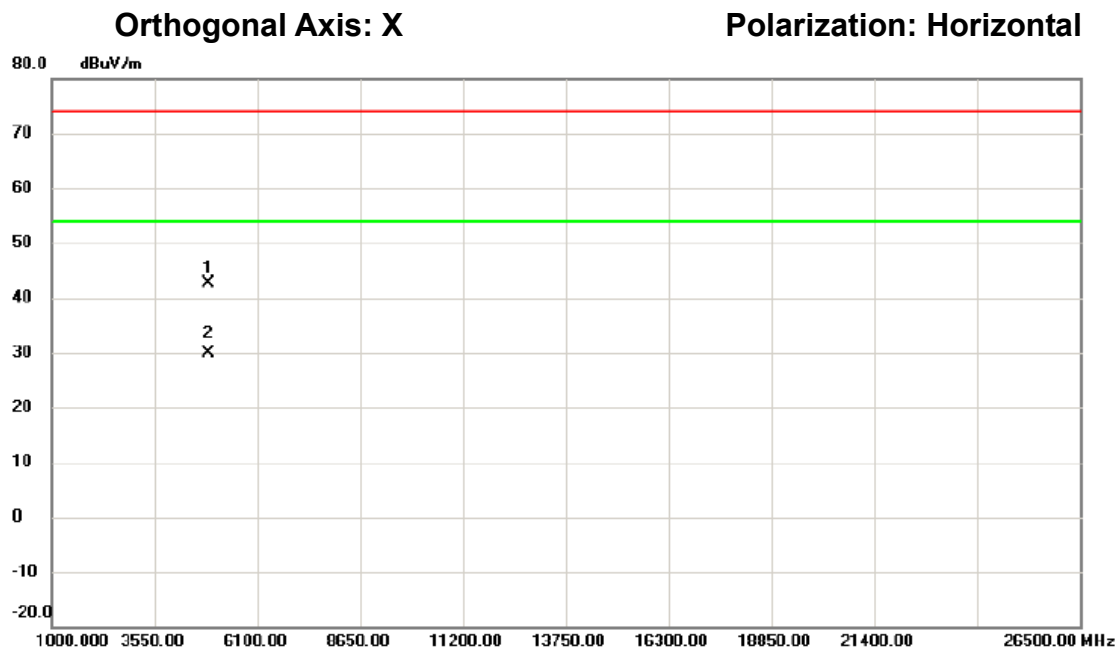

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4891.885	39.02	3.69	42.71	74.00	-31.29	peak	
2	*	4892.130	26.25	3.69	29.94	54.00	-24.06	AVG	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

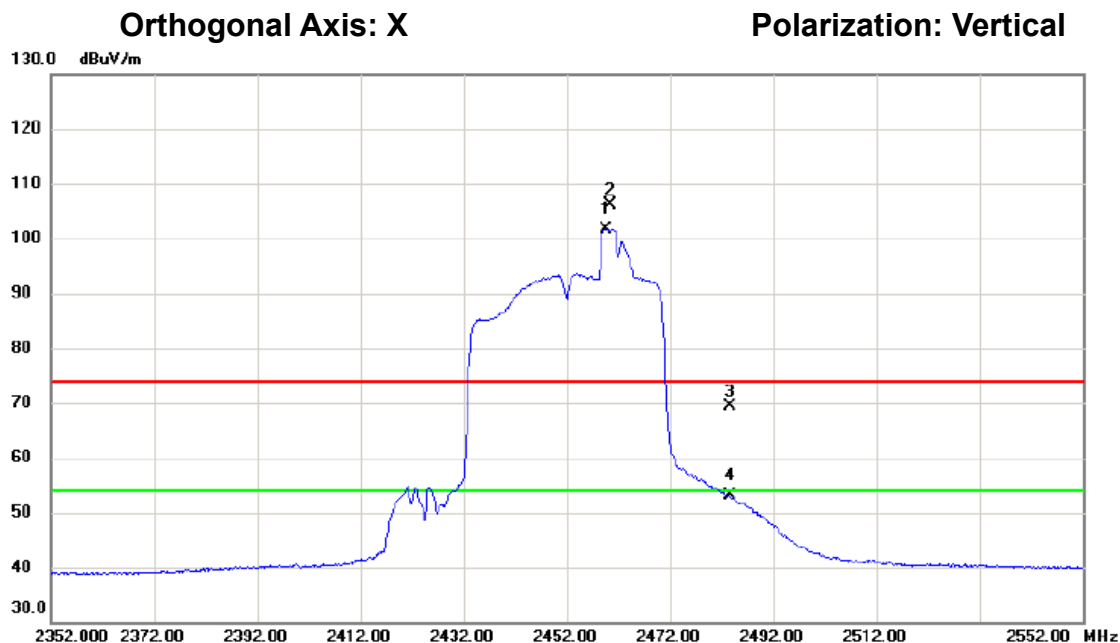

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.700	94.32	7.39	101.71	54.00	47.71	AVG	主波訊號不予判定
2	X	2460.500	98.70	7.39	106.09	74.00	32.09	peak	主波訊號不予判定
3		2483.500	61.87	7.47	69.34	74.00	-4.66	peak	
4		2483.500	45.71	7.47	53.18	54.00	-0.82	AVG	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

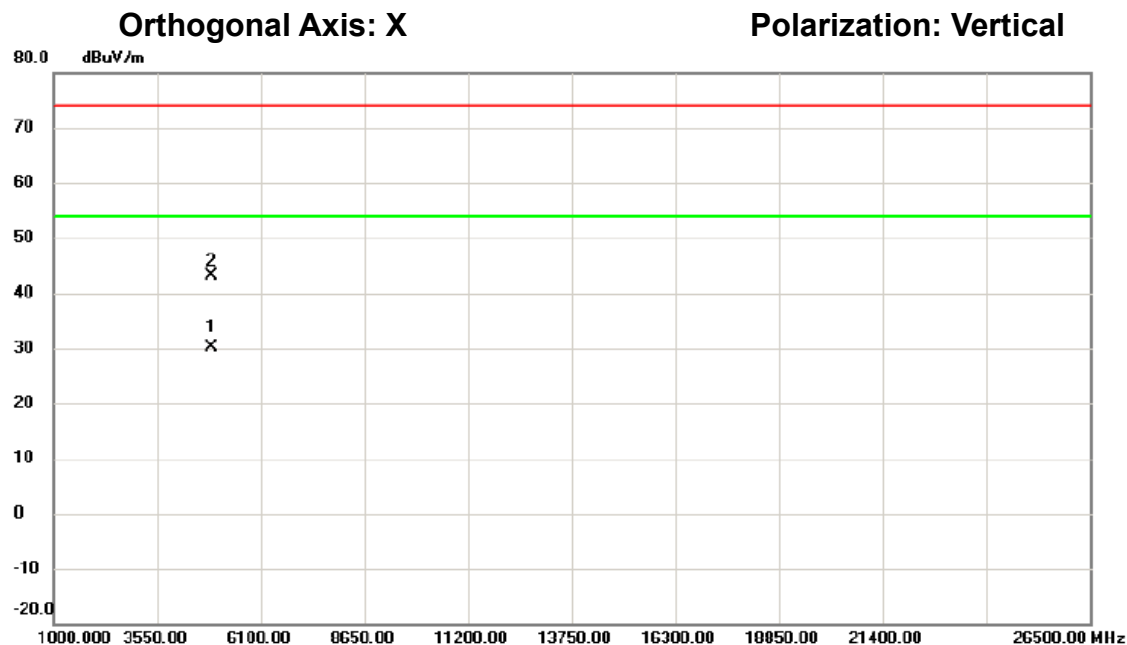


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4901.962	26.35	3.74	30.09	54.00	-23.91	AVG	
2		4904.375	39.32	3.74	43.06	74.00	-30.94	peak	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/03
 環境濕度: 52%

Orthogonal Axis: X


Polarization: Horizontal

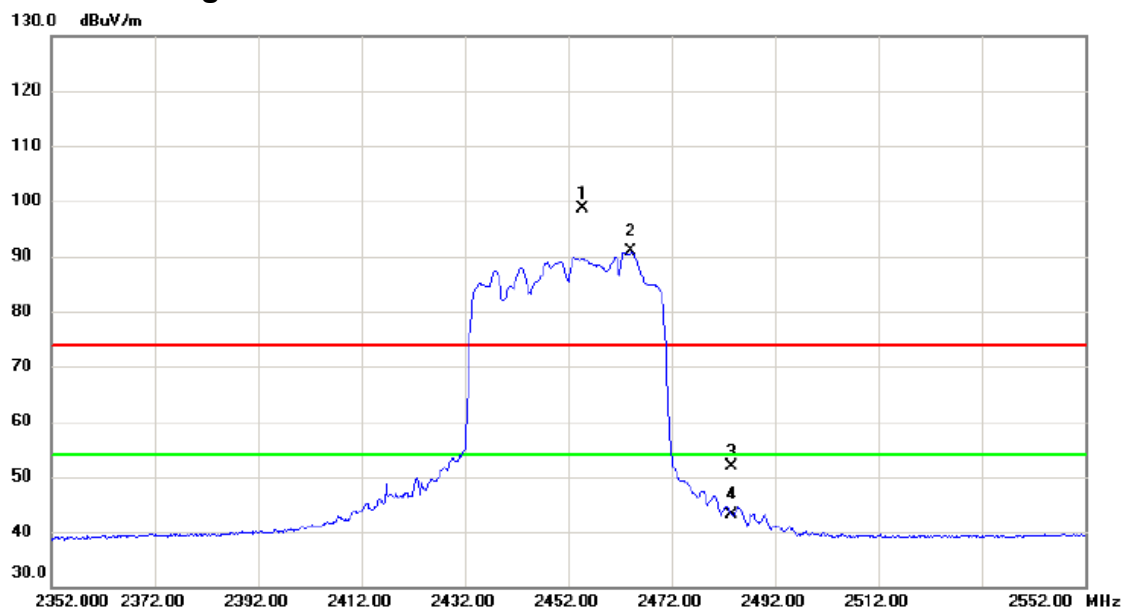

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.900	91.27	7.37	98.64	74.00	24.64	peak	主波訊號不予判定
2	*	2464.200	83.37	7.40	90.77	54.00	36.77	AVG	主波訊號不予判定
3		2483.500	44.37	7.47	51.84	74.00	-22.16	peak	
4		2483.500	35.76	7.47	43.23	54.00	-10.77	AVG	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/08/07
 環境濕度: 52%

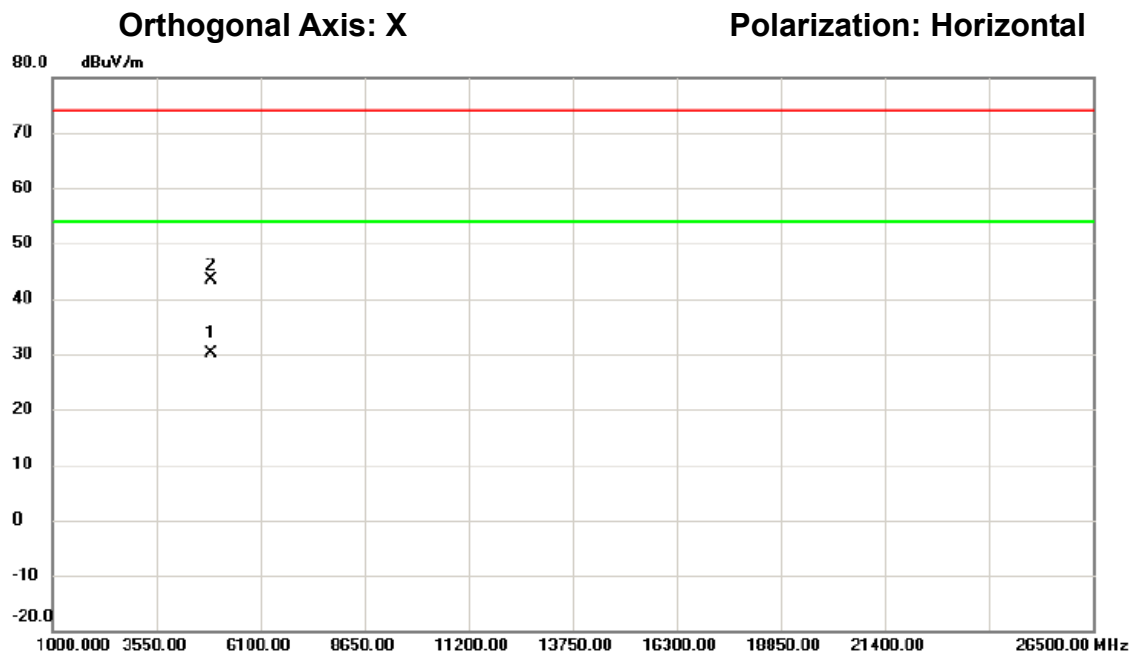

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4902.948	26.30	3.74	30.04	54.00	-23.96	AVG	
2		4903.932	39.58	3.74	43.32	74.00	-30.68	peak	

16.4.3 禁用頻帶內之混附發射

Non Beamforming

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

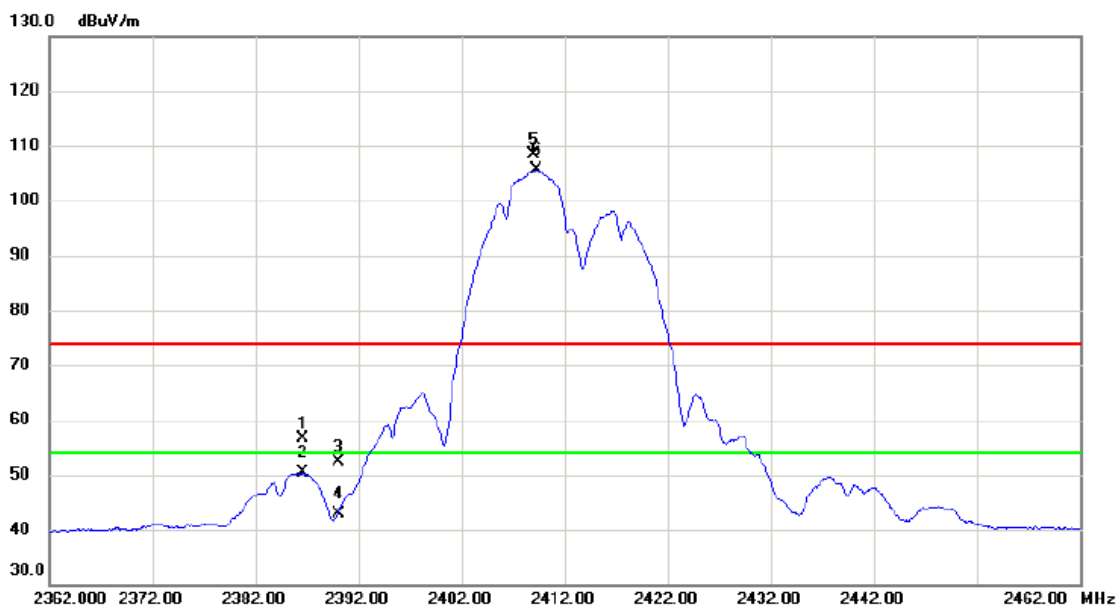

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2386.650	49.34	7.17	56.51	74.00	-17.49	peak	
2		2386.650	43.18	7.17	50.35	54.00	-3.65	AVG	
3		2390.000	45.10	7.17	52.27	74.00	-21.73	peak	
4		2390.000	35.72	7.17	42.89	54.00	-11.11	AVG	
5	X	2409.050	101.05	7.23	108.28	74.00	34.28	peak	主波訊號不予判定
6	*	2409.250	98.30	7.23	105.53	54.00	51.53	AVG	主波訊號不予判定

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

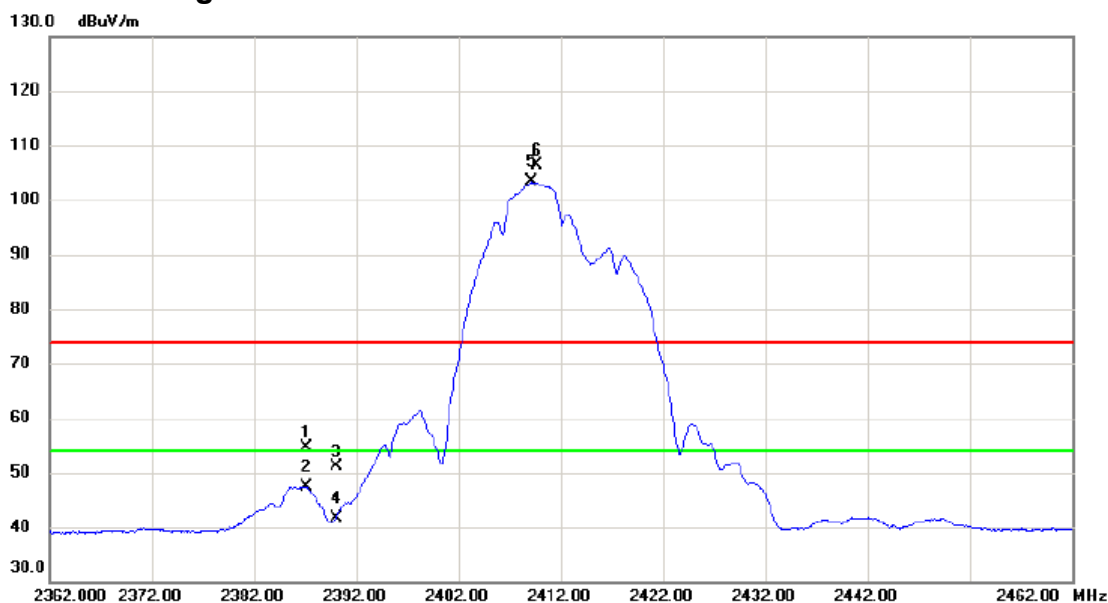

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2387.150	47.54	7.17	54.71	74.00	-19.29	peak	
2		2387.150	40.24	7.17	47.41	54.00	-6.59	AVG	
3		2390.000	43.95	7.17	51.12	74.00	-22.88	peak	
4		2390.000	34.48	7.17	41.65	54.00	-12.35	AVG	
5 *		2409.200	96.03	7.23	103.26	54.00	49.26	AVG	主波訊號不予判定
6 X		2409.700	99.20	7.24	106.44	74.00	32.44	peak	主波訊號不予判定

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

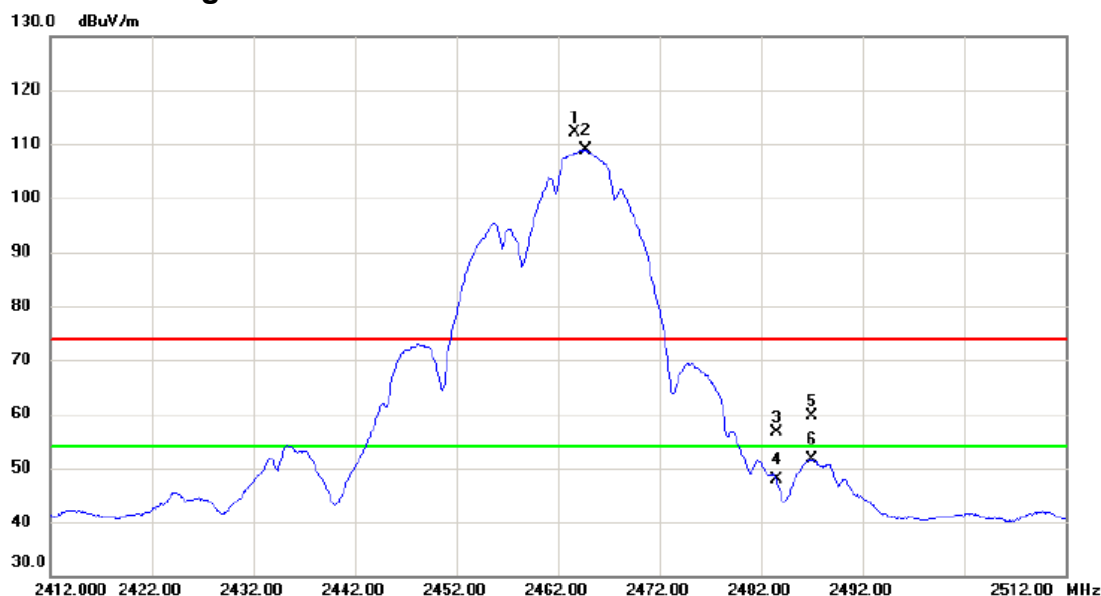

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.700	104.63	7.40	112.03	74.00	38.03	peak	主波訊號不予判定
2	*	2464.700	101.51	7.40	108.91	54.00	54.91	AVG	主波訊號不予判定
3		2483.500	49.17	7.47	56.64	74.00	-17.36	peak	
4		2483.500	40.38	7.47	47.85	54.00	-6.15	AVG	
5		2486.950	52.25	7.47	59.72	74.00	-14.28	peak	
6		2486.950	44.04	7.47	51.51	54.00	-2.49	AVG	

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

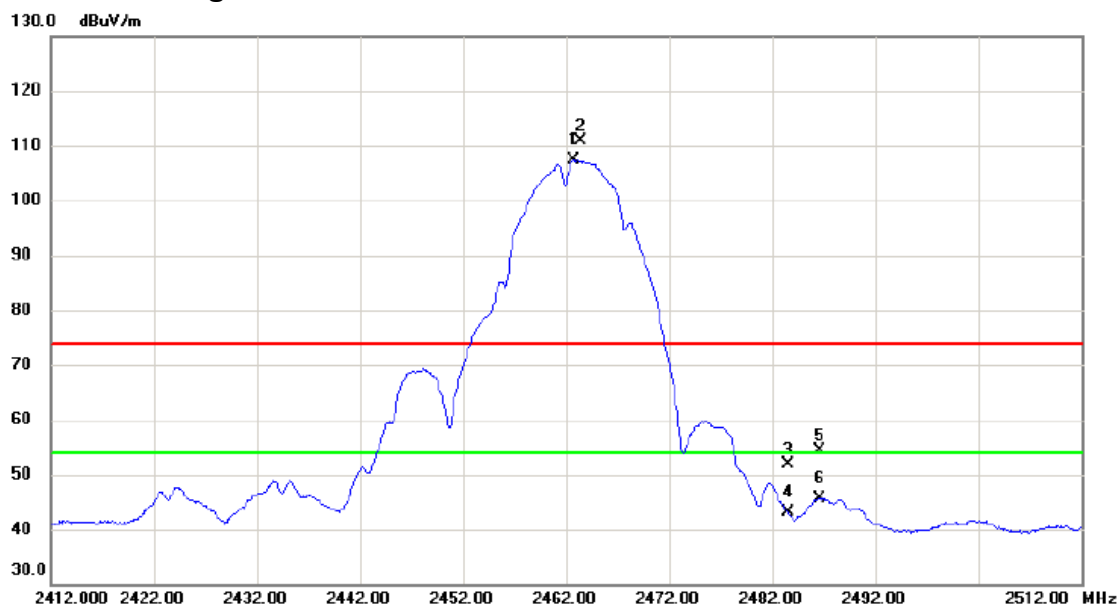

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2462.750	99.98	7.39	107.37	54.00	53.37	AVG	主波訊號不予判定
2	X	2463.400	103.59	7.39	110.98	74.00	36.98	peak	主波訊號不予判定
3		2483.500	44.50	7.47	51.97	74.00	-22.03	peak	
4		2483.500	35.56	7.47	43.03	54.00	-10.97	AVG	
5		2486.550	46.89	7.47	54.36	74.00	-19.64	peak	
6		2486.550	38.26	7.47	45.73	54.00	-8.27	AVG	

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

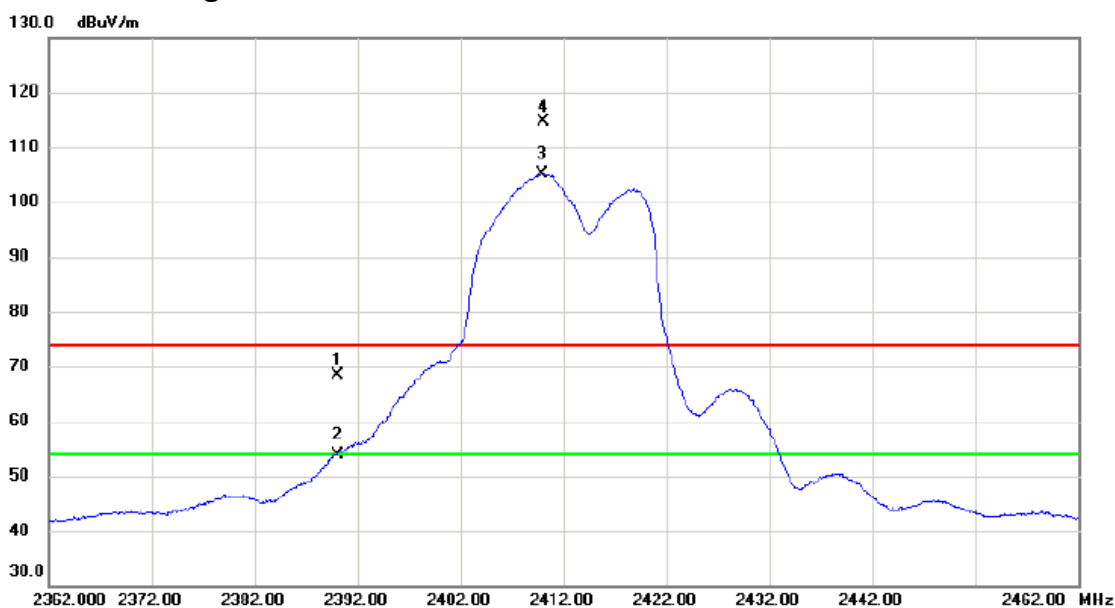

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	61.20	7.17	68.37	74.00	-5.63	peak	
2		2390.000	46.72	7.17	53.89	54.00	-0.11	AVG	
3	*	2409.950	97.86	7.24	105.10	54.00	51.10	AVG	主波訊號不予判定
4	X	2410.000	107.37	7.24	114.61	74.00	40.61	peak	主波訊號不予判定

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

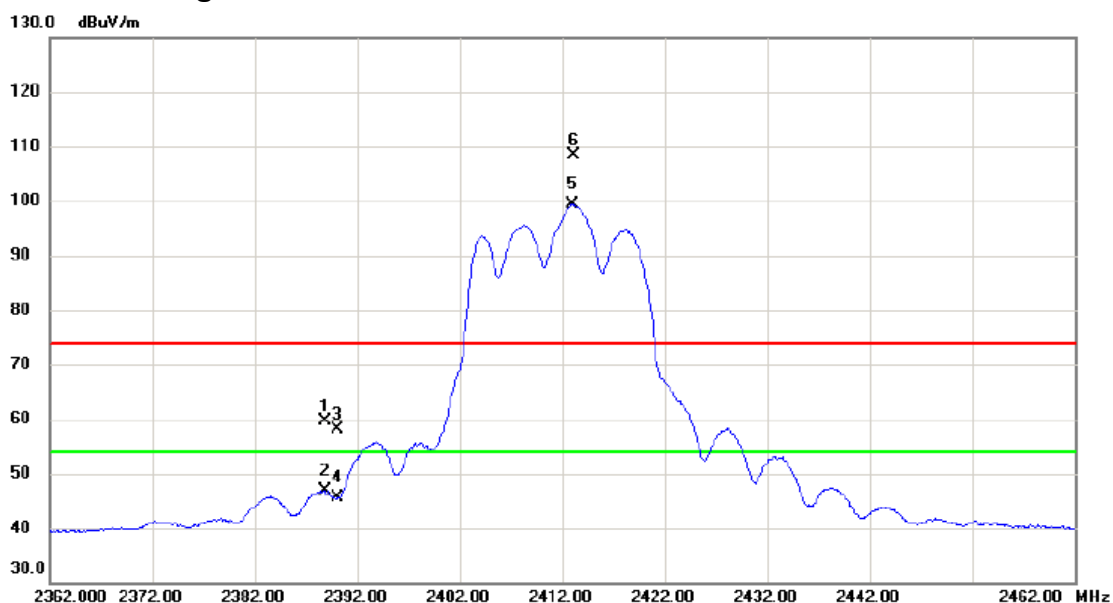

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.800	52.48	7.17	59.65	74.00	-14.35	peak	
2		2388.800	39.79	7.17	46.96	54.00	-7.04	AVG	
3		2390.000	51.02	7.17	58.19	74.00	-15.81	peak	
4		2390.000	38.34	7.17	45.51	54.00	-8.49	AVG	
5	*	2413.050	92.07	7.24	99.31	54.00	45.31	AVG	主波訊號不予判定
6	X	2413.200	101.20	7.24	108.44	74.00	34.44	peak	主波訊號不予判定

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

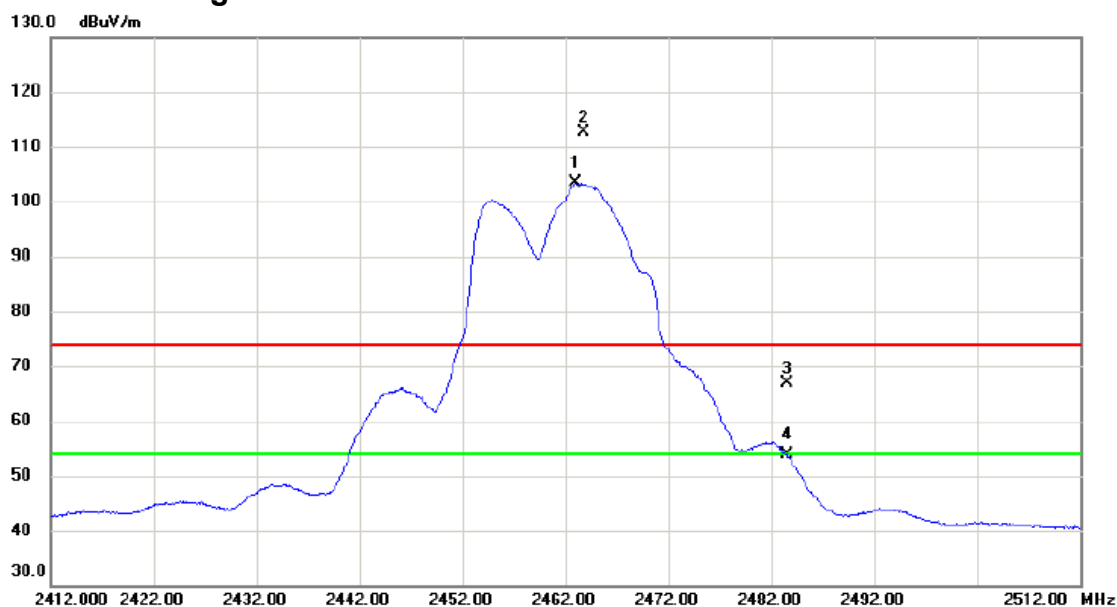

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2463.050	95.89	7.39	103.28	54.00	49.28	AVG	主波訊號不予判定
2	X	2463.800	105.12	7.40	112.52	74.00	38.52	peak	主波訊號不予判定
3		2483.500	59.33	7.47	66.80	74.00	-7.20	peak	
4		2483.500	46.47	7.47	53.94	54.00	-0.06	AVG	

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

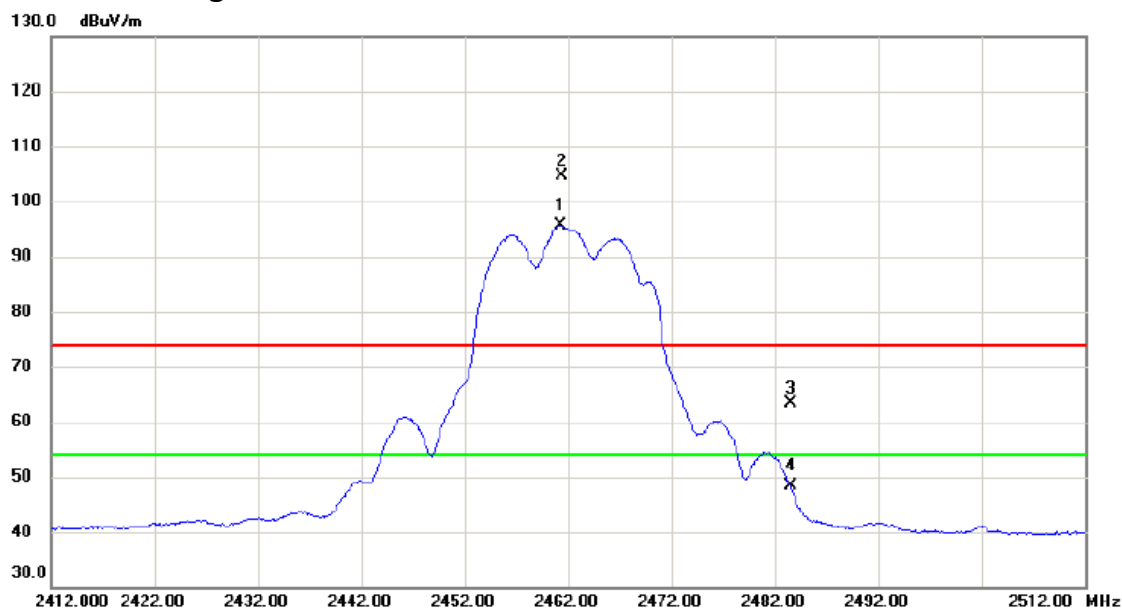

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2461.250	88.20	7.39	95.59	54.00	41.59	AVG	主波訊號不予判定
2	X	2461.400	97.13	7.39	104.52	74.00	30.52	peak	主波訊號不予判定
3		2483.500	56.03	7.47	63.50	74.00	-10.50	peak	
4		2483.500	40.81	7.47	48.28	54.00	-5.72	AVG	

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

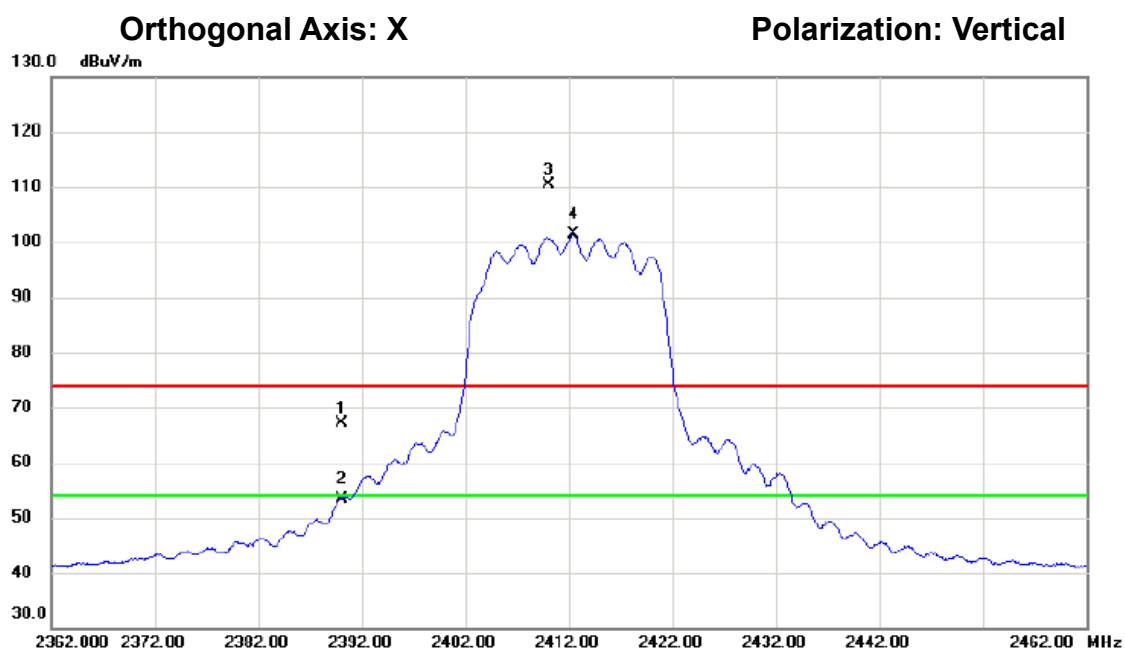

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	60.07	7.17	67.24	74.00	-6.76	peak	
2		2390.000	46.33	7.17	53.50	54.00	-0.50	AVG	
3	X	2410.000	103.07	7.24	110.31	74.00	36.31	peak	主波訊號不予判定
4	*	2412.500	94.12	7.24	101.36	54.00	47.36	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

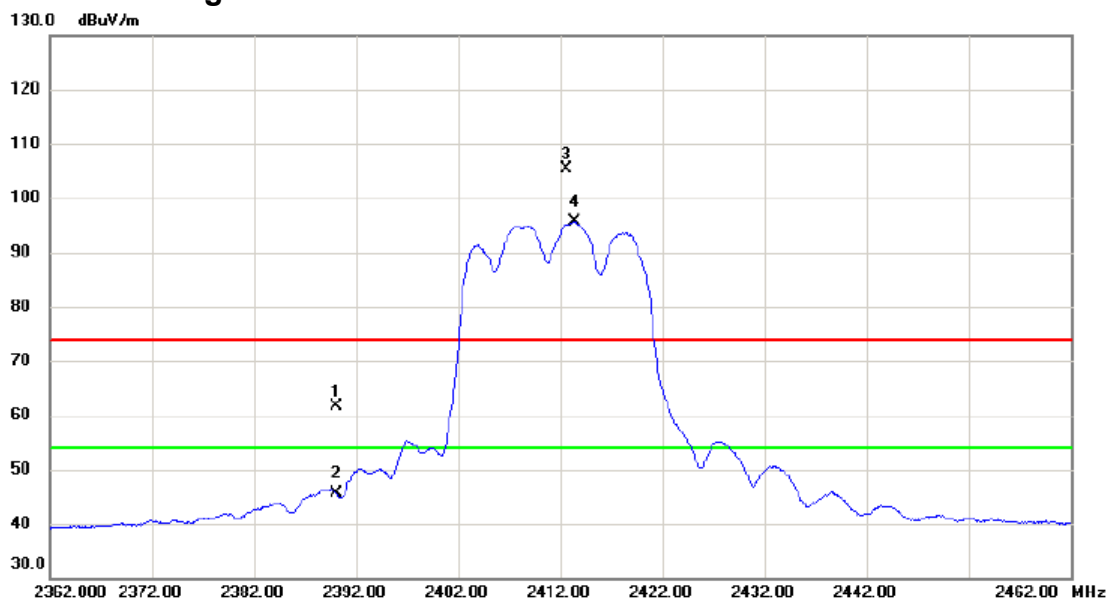

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	54.35	7.17	61.52	74.00	-12.48	peak	
2		2390.000	38.46	7.17	45.63	54.00	-8.37	AVG	
3	X	2412.550	98.18	7.24	105.42	74.00	31.42	peak	主波訊號不予判定
4	*	2413.450	88.41	7.24	95.65	54.00	41.65	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

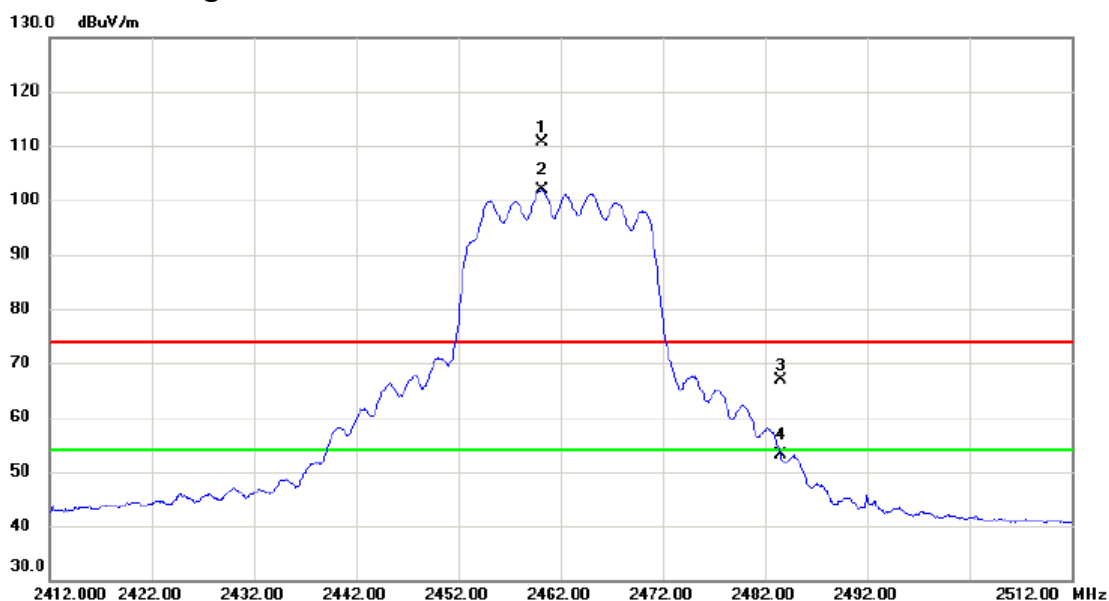

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.200	103.31	7.39	110.70	74.00	36.70	peak	主波訊號不予判定
2	*	2460.250	94.46	7.39	101.85	54.00	47.85	AVG	主波訊號不予判定
3		2483.500	59.36	7.47	66.83	74.00	-7.17	peak	
4		2483.500	45.71	7.47	53.18	54.00	-0.82	AVG	

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

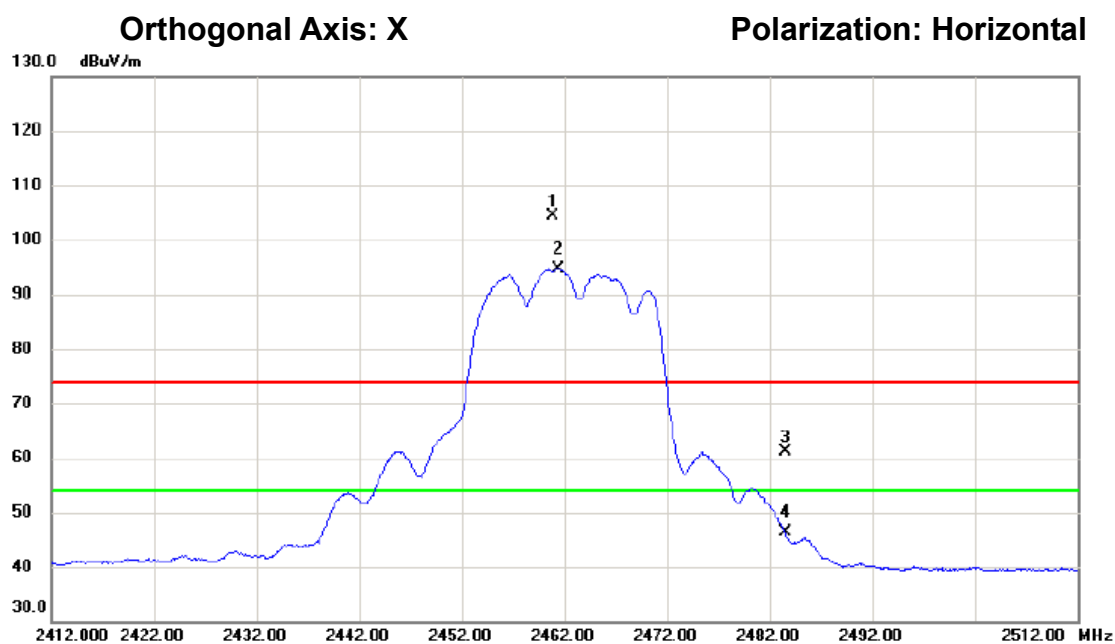

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.800	96.97	7.39	104.36	74.00	30.36	peak	主波訊號不予判定
2	*	2461.450	87.34	7.39	94.73	54.00	40.73	AVG	主波訊號不予判定
3		2483.500	53.77	7.47	61.24	74.00	-12.76	peak	
4		2483.500	38.87	7.47	46.34	54.00	-7.66	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

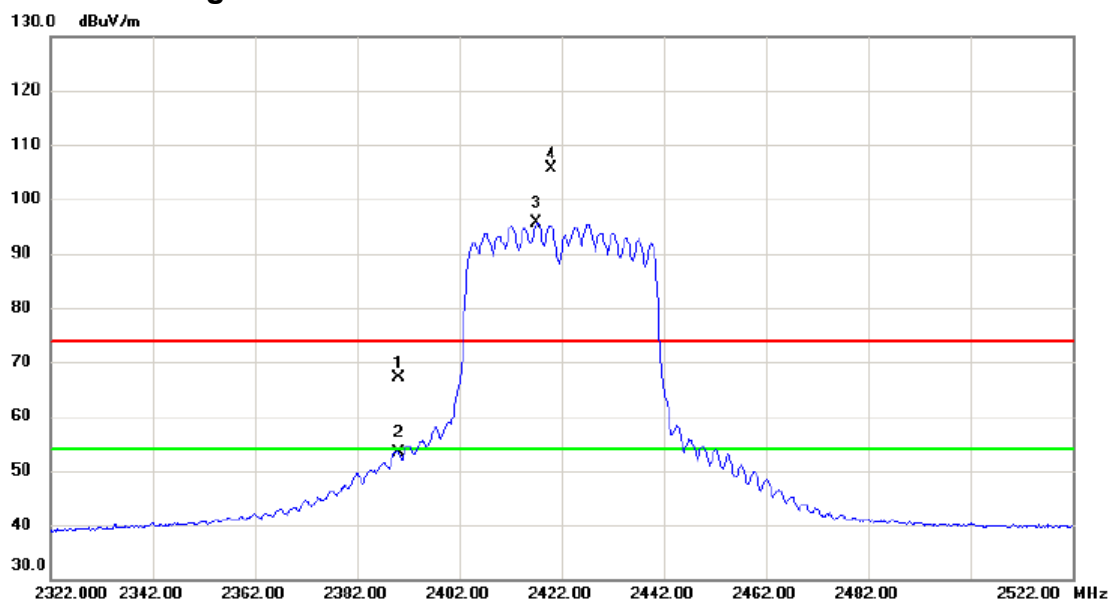

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	60.08	7.17	67.25	74.00	-6.75	peak	
2		2390.000	46.14	7.17	53.31	54.00	-0.69	AVG	
3	*	2417.200	88.44	7.25	95.69	54.00	41.69	AVG	主波訊號不予判定
4	X	2420.100	98.46	7.26	105.72	74.00	31.72	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

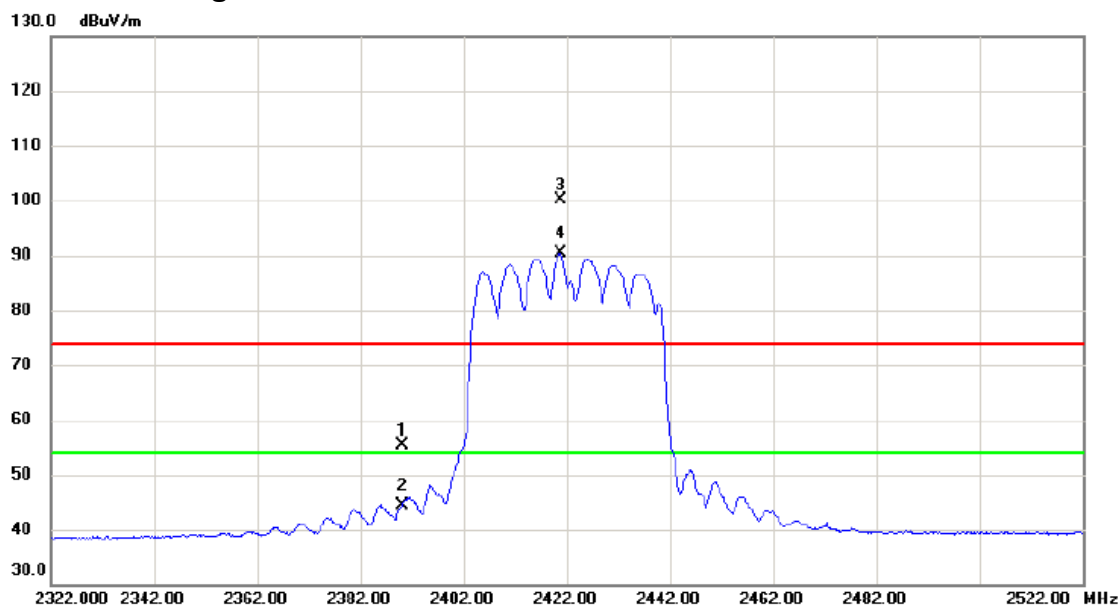

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	48.14	7.17	55.31	74.00	-18.69	peak	
2		2390.000	37.25	7.17	44.42	54.00	-9.58	AVG	
3	X	2420.700	92.82	7.26	100.08	74.00	26.08	peak	主波訊號不予判定
4	*	2420.700	83.11	7.26	90.37	54.00	36.37	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

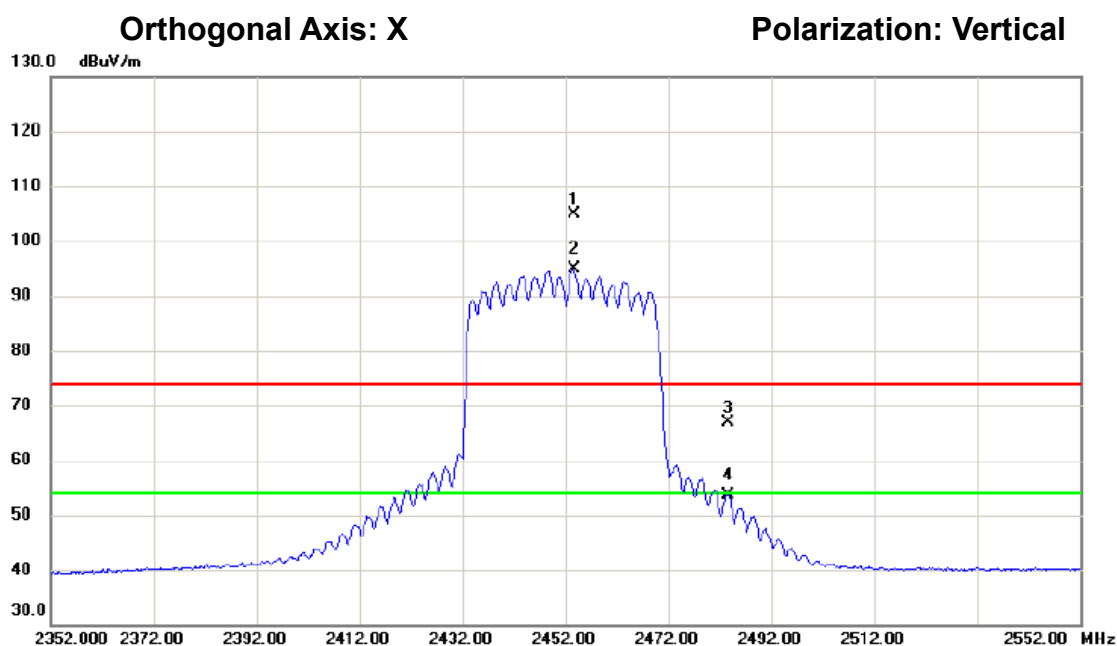

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2453.700	97.47	7.37	104.84	74.00	30.84	peak	主波訊號不予判定
2	*	2453.700	87.49	7.37	94.86	54.00	40.86	AVG	主波訊號不予判定
3		2483.500	59.39	7.47	66.86	74.00	-7.14	peak	
4		2483.500	46.15	7.47	53.62	54.00	-0.38	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

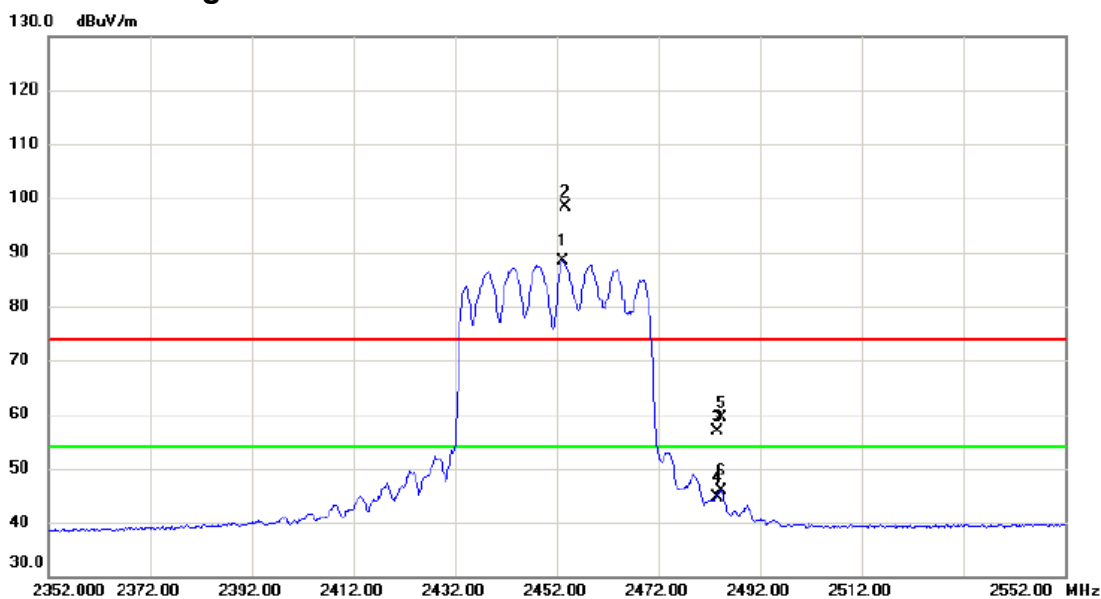

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.200	81.06	7.37	88.43	54.00	34.43	AVG	主波訊號不予判定
2	X	2453.700	90.99	7.37	98.36	74.00	24.36	peak	主波訊號不予判定
3		2483.500	49.46	7.47	56.93	74.00	-17.07	peak	
4		2483.500	37.16	7.47	44.63	54.00	-9.37	AVG	
5		2484.300	51.86	7.47	59.33	74.00	-14.67	peak	
6		2484.300	38.42	7.47	45.89	54.00	-8.11	AVG	

測試頻道: IEEE vht20 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

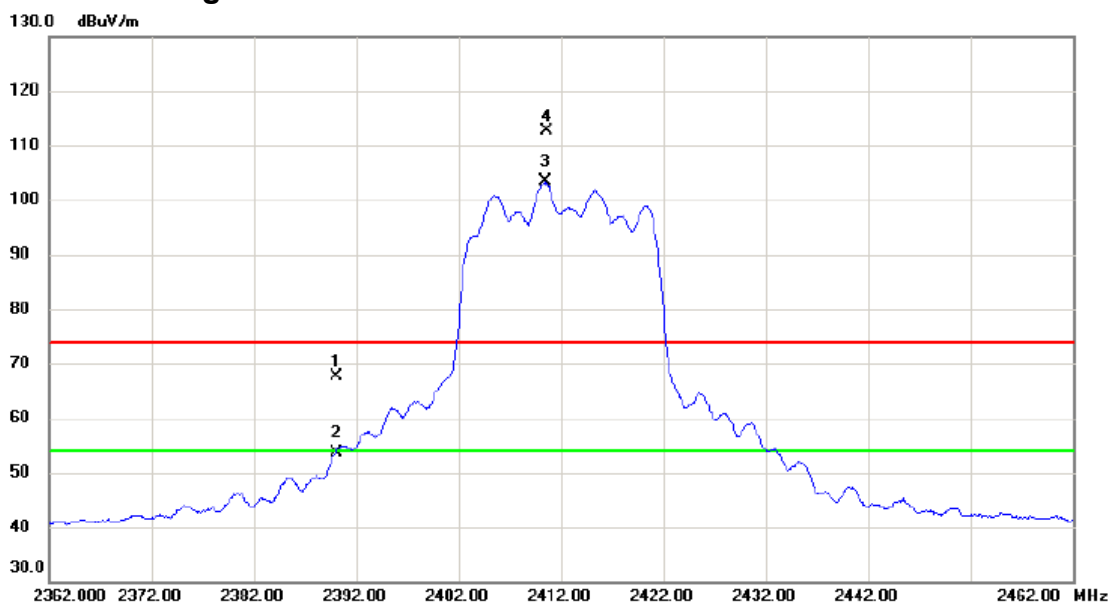

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	60.52	7.17	67.69	74.00	-6.31	peak	
2		2390.000	46.55	7.17	53.72	54.00	-0.28	AVG	
3	*	2410.450	96.12	7.24	103.36	54.00	49.36	AVG	主波訊號不予判定
4	X	2410.550	105.36	7.24	112.60	74.00	38.60	peak	主波訊號不予判定

測試頻道: IEEE vht20 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

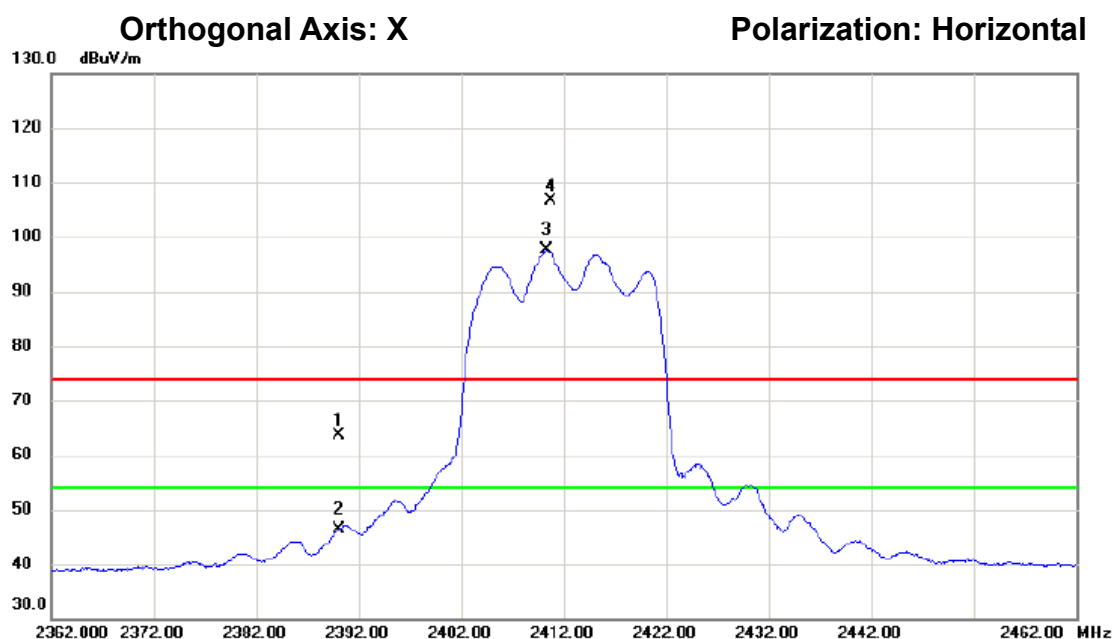

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.54	7.17	63.71	74.00	-10.29	peak	
2		2390.000	39.19	7.17	46.36	54.00	-7.64	AVG	
3	*	2410.350	90.41	7.24	97.65	54.00	43.65	AVG	主波訊號不予判定
4	X	2410.700	99.37	7.24	106.61	74.00	32.61	peak	主波訊號不予判定

測試頻道: IEEE vht20 /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

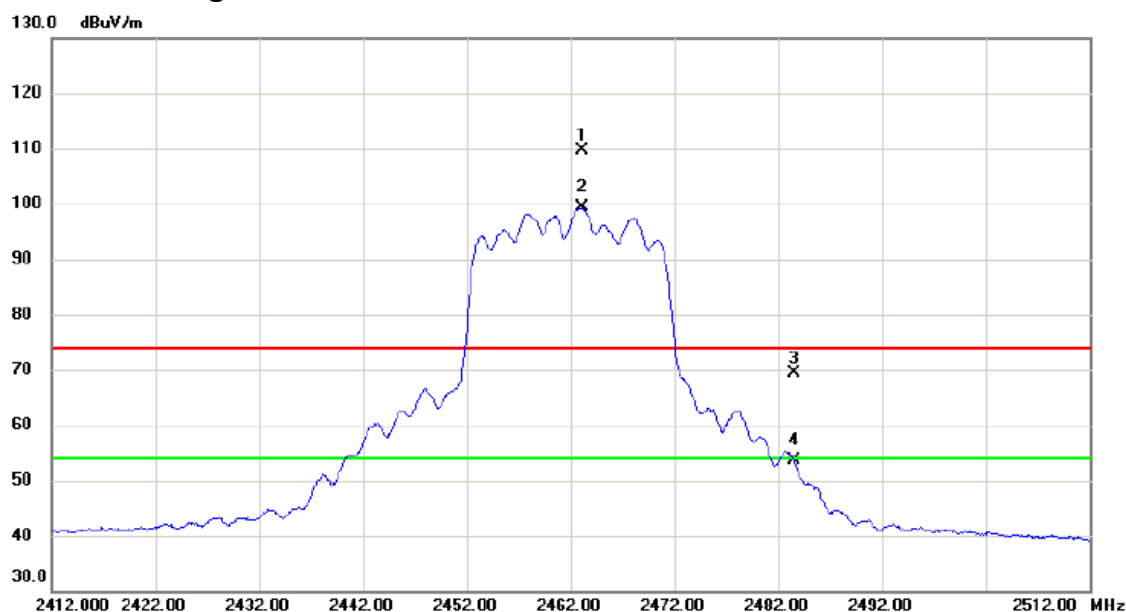

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.150	102.31	7.39	109.70	74.00	35.70	peak	主波訊號不予判定
2	*	2463.200	91.87	7.39	99.26	54.00	45.26	AVG	主波訊號不予判定
3		2483.500	61.96	7.47	69.43	74.00	-4.57	peak	
4		2483.500	46.06	7.47	53.53	54.00	-0.47	AVG	

測試頻道: IEEE vht20 /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

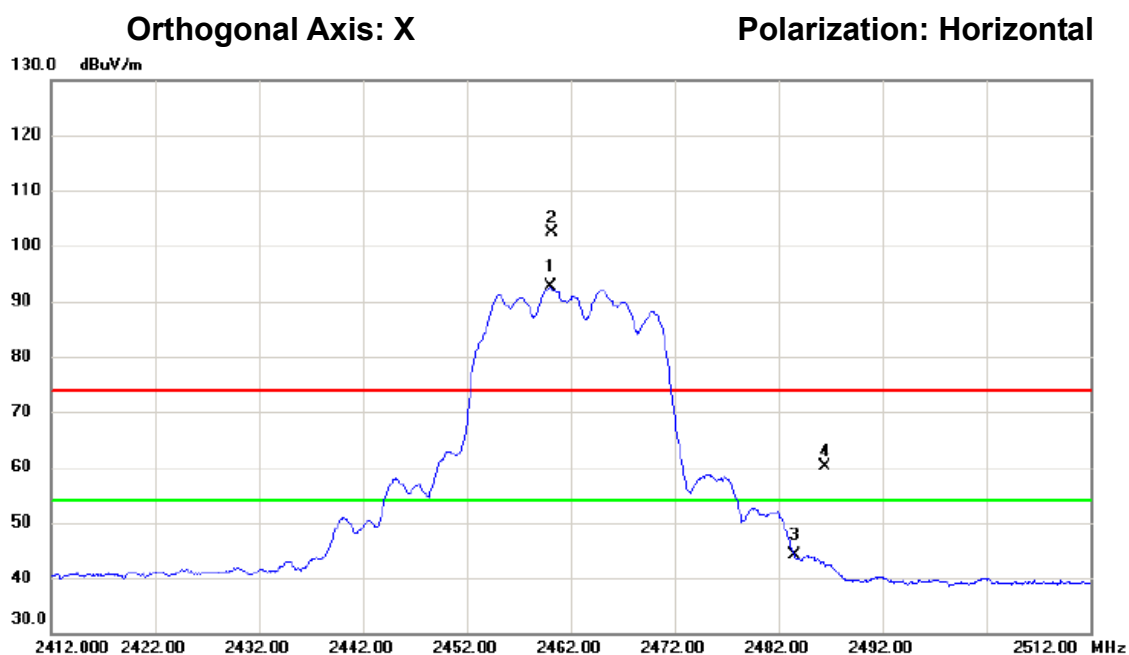

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2460.050	85.24	7.39	92.63	54.00	38.63	AVG	主波訊號不予判定
2	X	2460.150	94.93	7.39	102.32	74.00	28.32	peak	主波訊號不予判定
3		2483.500	36.75	7.47	44.22	54.00	-9.78	AVG	
4		2486.500	52.64	7.46	60.10	74.00	-13.90	peak	

測試頻道: IEEE vht40 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

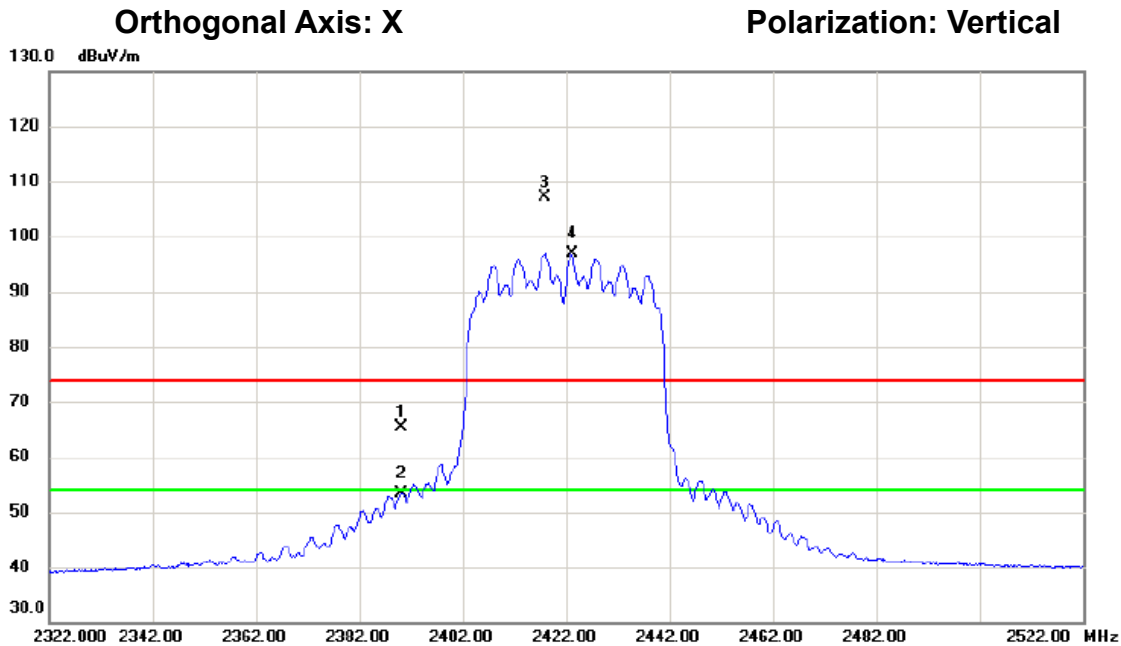

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	58.22	7.17	65.39	74.00	-8.61	peak	
2		2390.000	46.13	7.17	53.30	54.00	-0.70	AVG	
3	X	2417.900	99.75	7.26	107.01	74.00	33.01	peak	主波訊號不予判定
4	*	2423.100	89.61	7.28	96.89	54.00	42.89	AVG	主波訊號不予判定

測試頻道: IEEE vht40 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

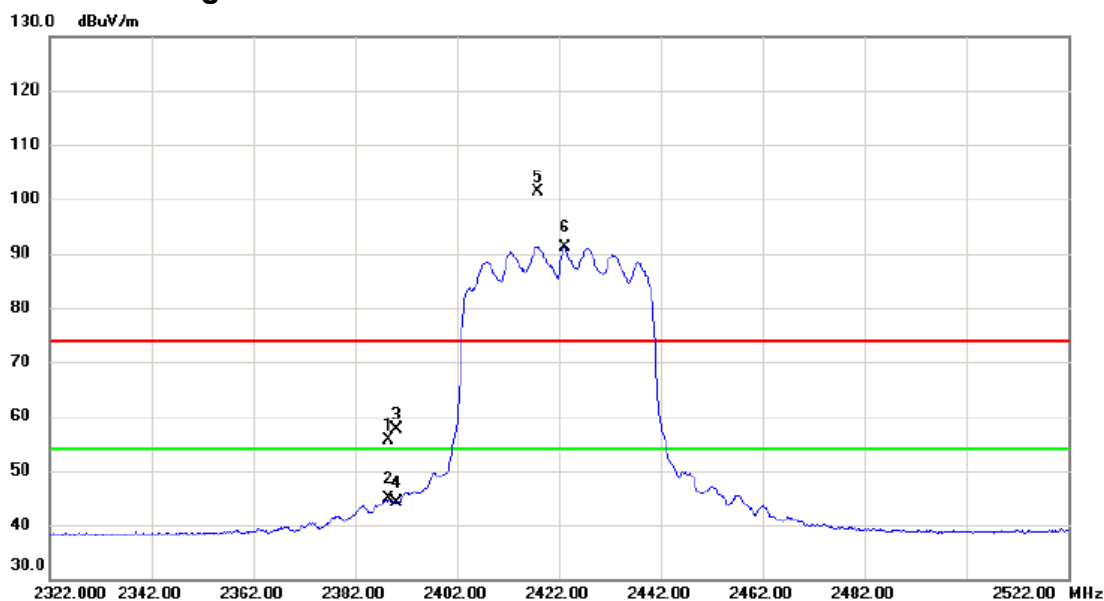

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.600	48.46	7.17	55.63	74.00	-18.37	peak	
2		2388.600	37.78	7.17	44.95	54.00	-9.05	AVG	
3		2390.000	50.47	7.17	57.64	74.00	-16.36	peak	
4		2390.000	36.85	7.17	44.02	54.00	-9.98	AVG	
5	X	2417.800	94.06	7.26	101.32	74.00	27.32	peak	主波訊號不予判定
6	*	2423.300	83.86	7.28	91.14	54.00	37.14	AVG	主波訊號不予判定

測試頻道: IEEE vht40 /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

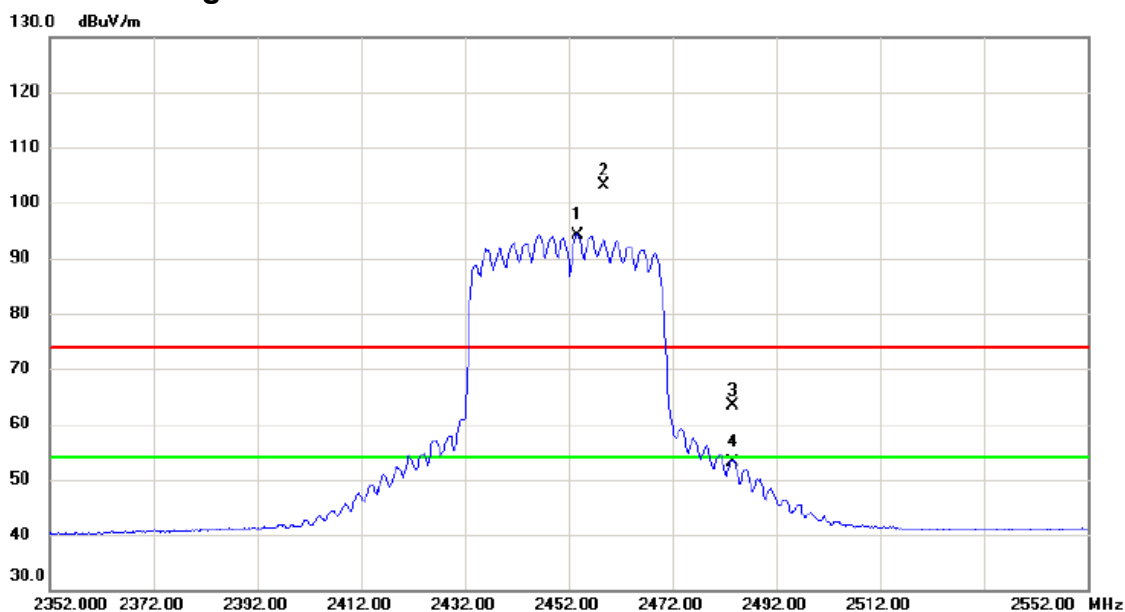

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2453.800	86.88	7.37	94.25	54.00	40.25	AVG	主波訊號不予判定
2	X	2458.700	95.78	7.38	103.16	74.00	29.16	peak	主波訊號不予判定
3		2483.500	55.86	7.47	63.33	74.00	-10.67	peak	
4		2483.500	45.78	7.47	53.25	54.00	-0.75	AVG	

測試頻道: IEEE vht40 /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/07/19

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

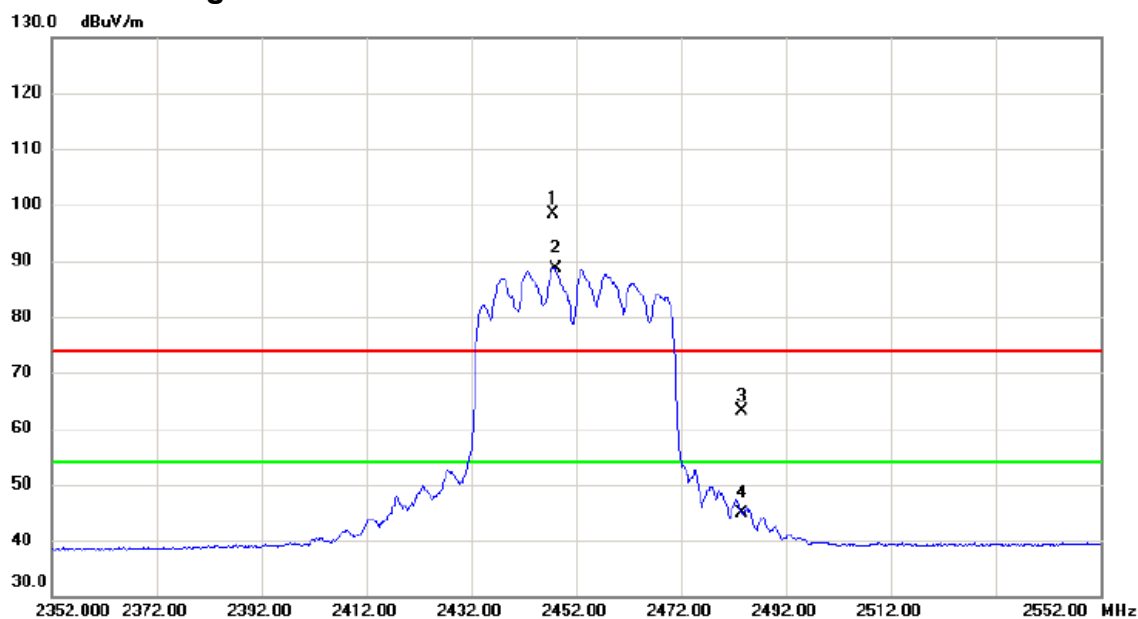


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2447.700	91.10	7.35	98.45	74.00	24.45	peak	主波訊號不予判定
2	*	2448.100	81.36	7.36	88.72	54.00	34.72	AVG	主波訊號不予判定
3		2483.500	55.78	7.47	63.25	74.00	-10.75	peak	
4		2483.500	37.37	7.47	44.84	54.00	-9.16	AVG	

With Beamforming

測試頻道: IEEE 802.11n (HT20) /	測試模式: 發射
2.4 GHz 頻帶 / 2310 - 2390 MHz	
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 108/08/03
環境溫度: 24°C	環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

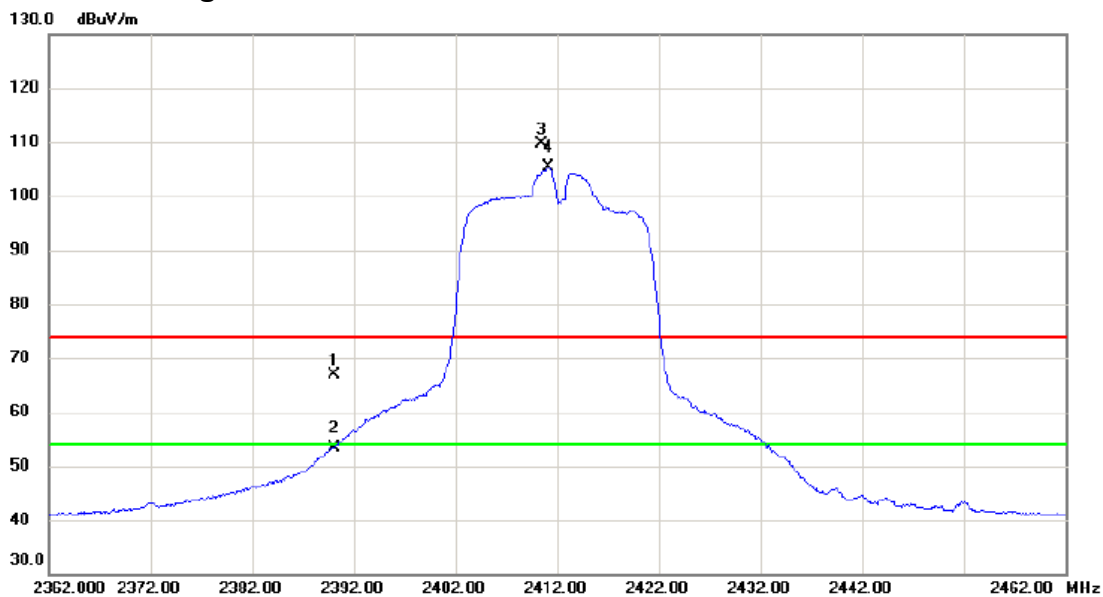

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	59.72	7.17	66.89	74.00	-7.11	peak	
2		2390.000	46.24	7.17	53.41	54.00	-0.59	AVG	
3	X	2410.500	102.36	7.24	109.60	74.00	35.60	peak	主波訊號不予判定
4	*	2411.200	98.04	7.24	105.28	54.00	51.28	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

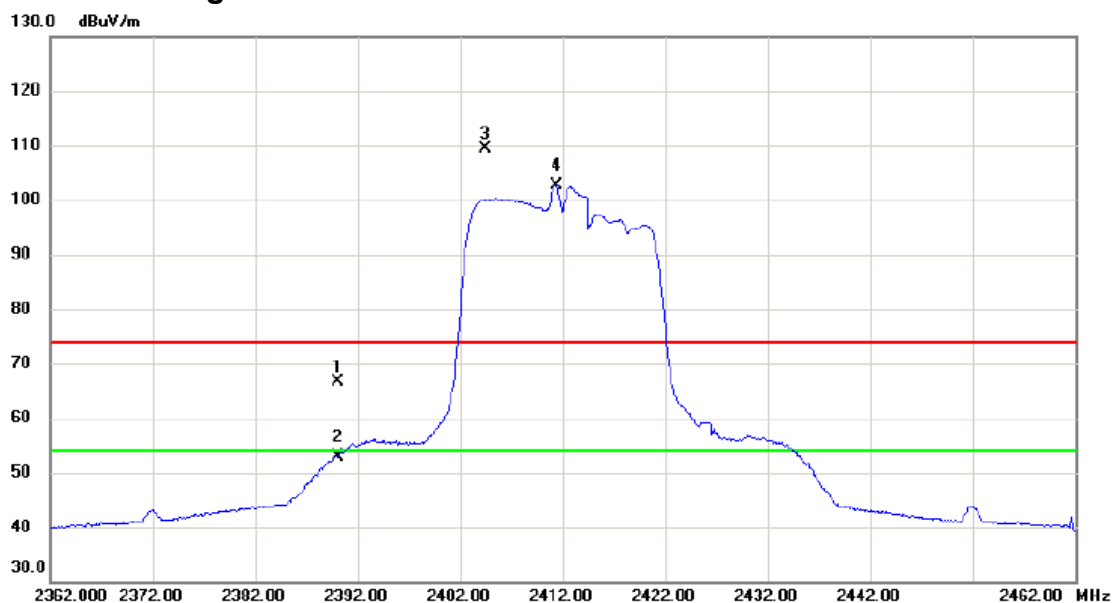

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	59.46	7.17	66.63	74.00	-7.37	peak	
2		2390.000	45.75	7.17	52.92	54.00	-1.08	AVG	
3	X	2404.500	102.07	7.21	109.28	74.00	35.28	peak	主波訊號不予判定
4	*	2411.350	95.31	7.24	102.55	54.00	48.55	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

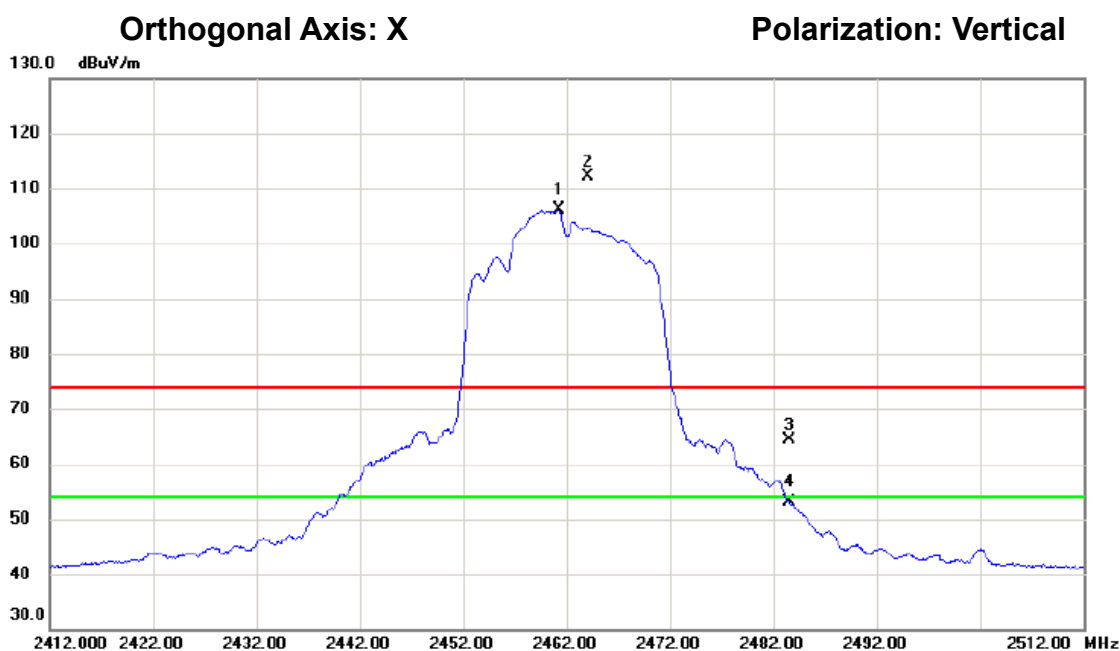

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2461.250	98.69	7.39	106.08	54.00	52.08	AVG	主波訊號不予判定
2	X	2464.100	104.65	7.40	112.05	74.00	38.05	peak	主波訊號不予判定
3		2483.500	57.03	7.47	64.50	74.00	-9.50	peak	
4		2483.500	45.65	7.47	53.12	54.00	-0.88	AVG	

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

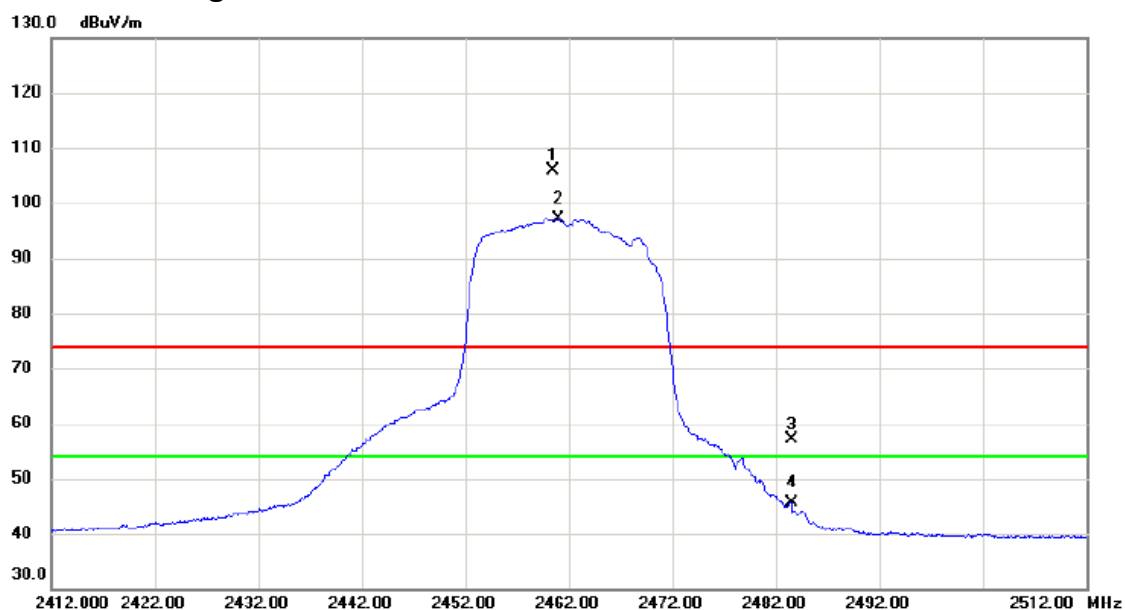

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.450	98.55	7.39	105.94	74.00	31.94	peak	主波訊號不予判定
2	*	2460.950	89.80	7.39	97.19	54.00	43.19	AVG	主波訊號不予判定
3		2483.500	49.76	7.47	57.23	74.00	-16.77	peak	
4		2483.500	38.04	7.47	45.51	54.00	-8.49	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

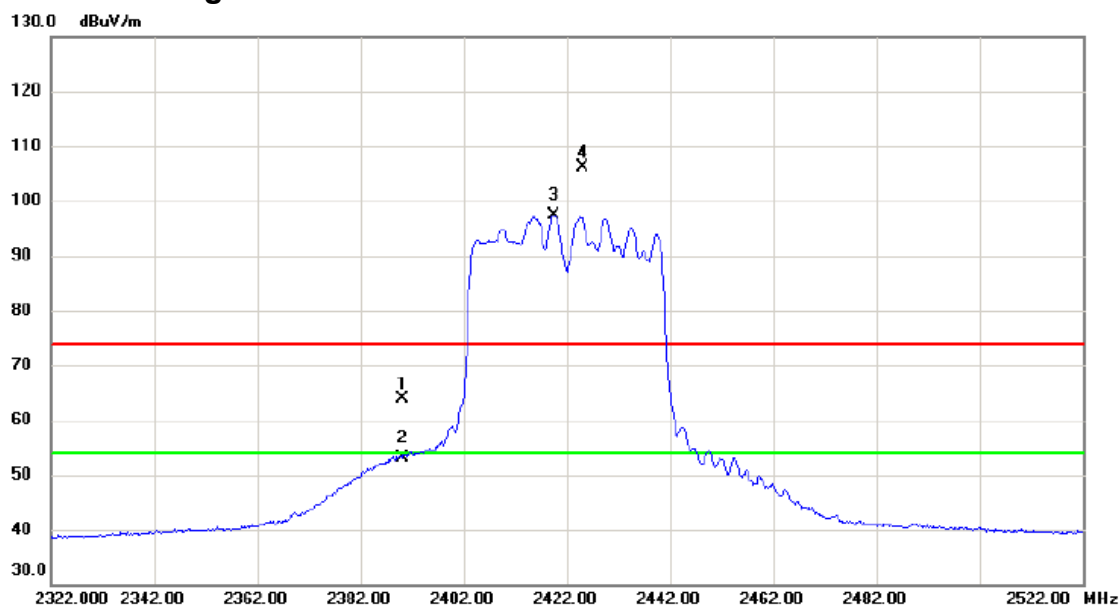

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.67	7.17	63.84	74.00	-10.16	peak	
2		2390.000	45.97	7.17	53.14	54.00	-0.86	AVG	
3	*	2419.600	90.20	7.26	97.46	54.00	43.46	AVG	主波訊號不予判定
4	X	2425.000	98.82	7.29	106.11	74.00	32.11	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

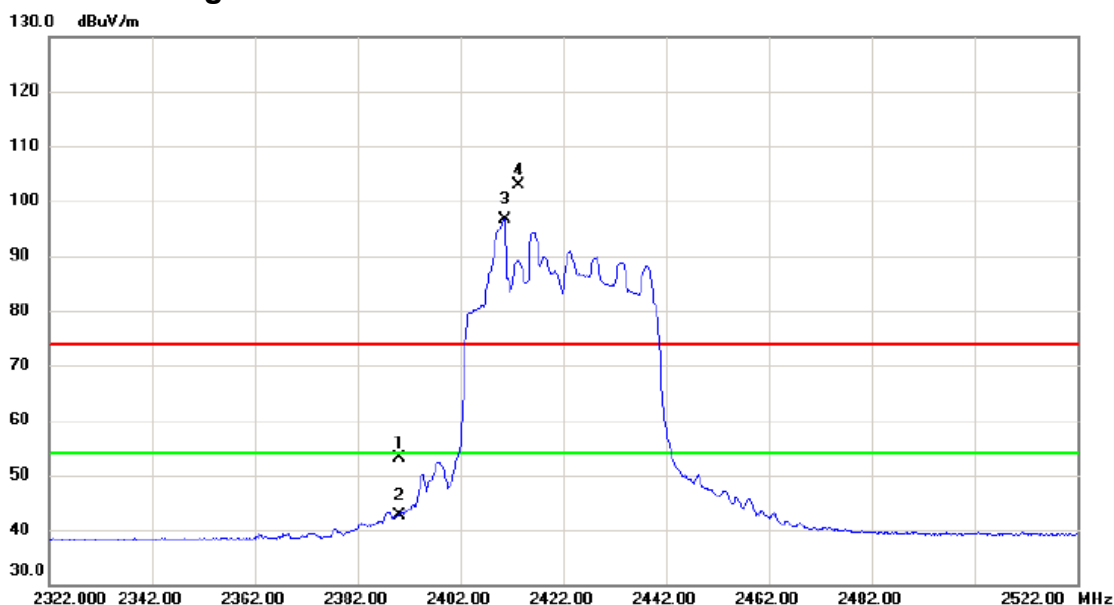

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	46.03	7.17	53.20	74.00	-20.80	peak	
2		2390.000	35.45	7.17	42.62	54.00	-11.38	AVG	
3	*	2410.600	89.49	7.24	96.73	54.00	42.73	AVG	主波訊號不予判定
4	X	2413.400	95.67	7.24	102.91	74.00	28.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

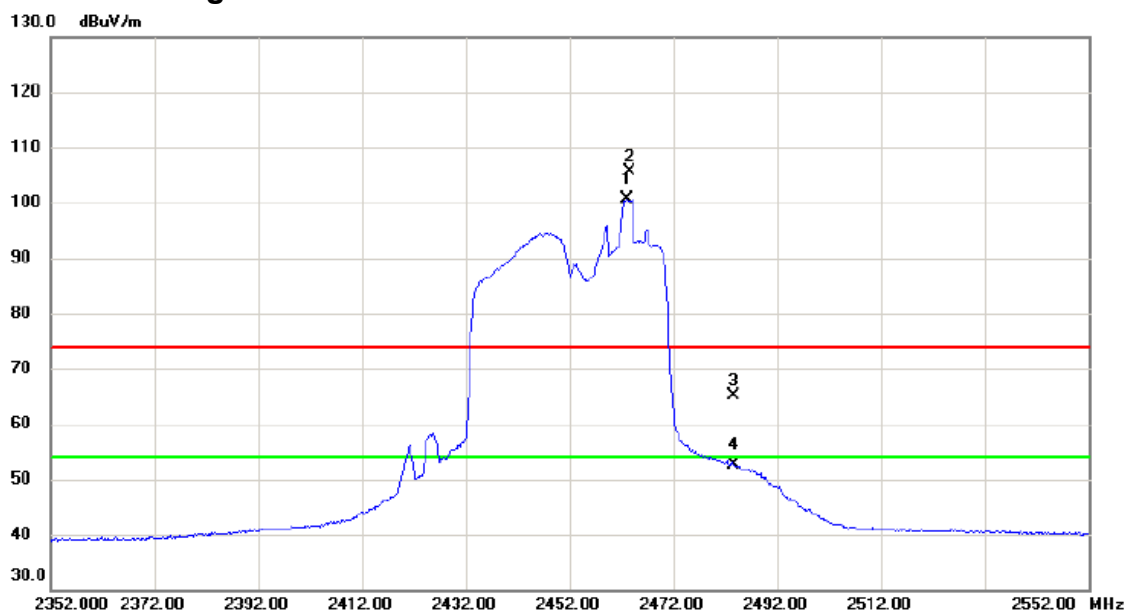

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2463.200	93.15	7.39	100.54	54.00	46.54	AVG	主波訊號不予判定
2	X	2463.500	98.25	7.40	105.65	74.00	31.65	peak	主波訊號不予判定
3		2483.500	57.68	7.47	65.15	74.00	-8.85	peak	
4		2483.530	45.20	7.47	52.67	54.00	-1.33	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

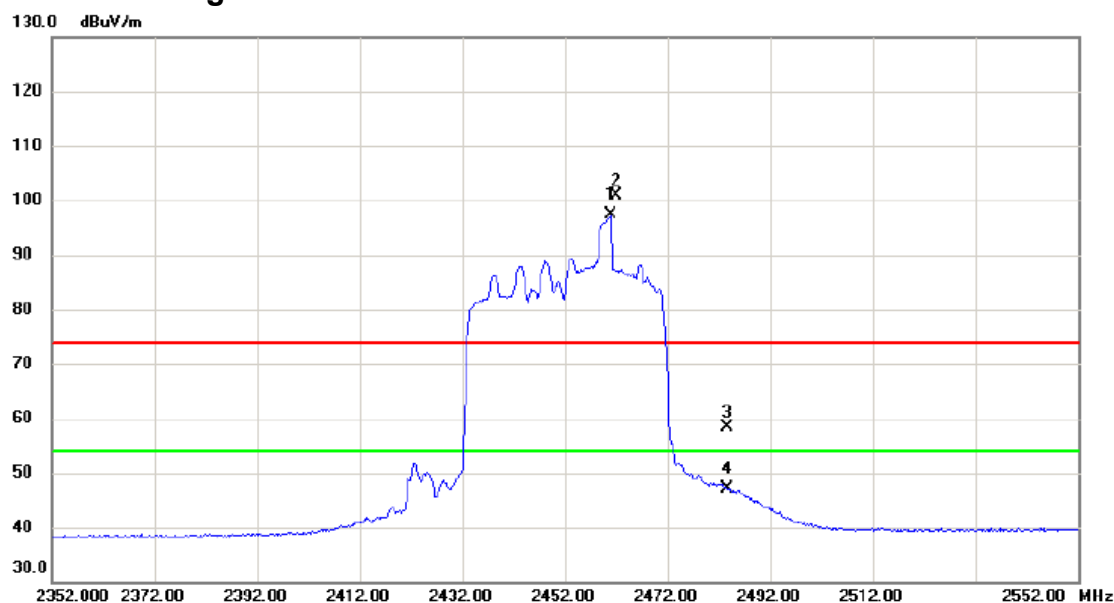

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2461.000	89.87	7.39	97.26	54.00	43.26	AVG	主波訊號不予判定
2	X	2462.100	93.48	7.39	100.87	74.00	26.87	peak	主波訊號不予判定
3		2483.500	50.99	7.47	58.46	74.00	-15.54	peak	
4		2483.500	39.67	7.47	47.14	54.00	-6.86	AVG	

測試頻道: IEEE vht20 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

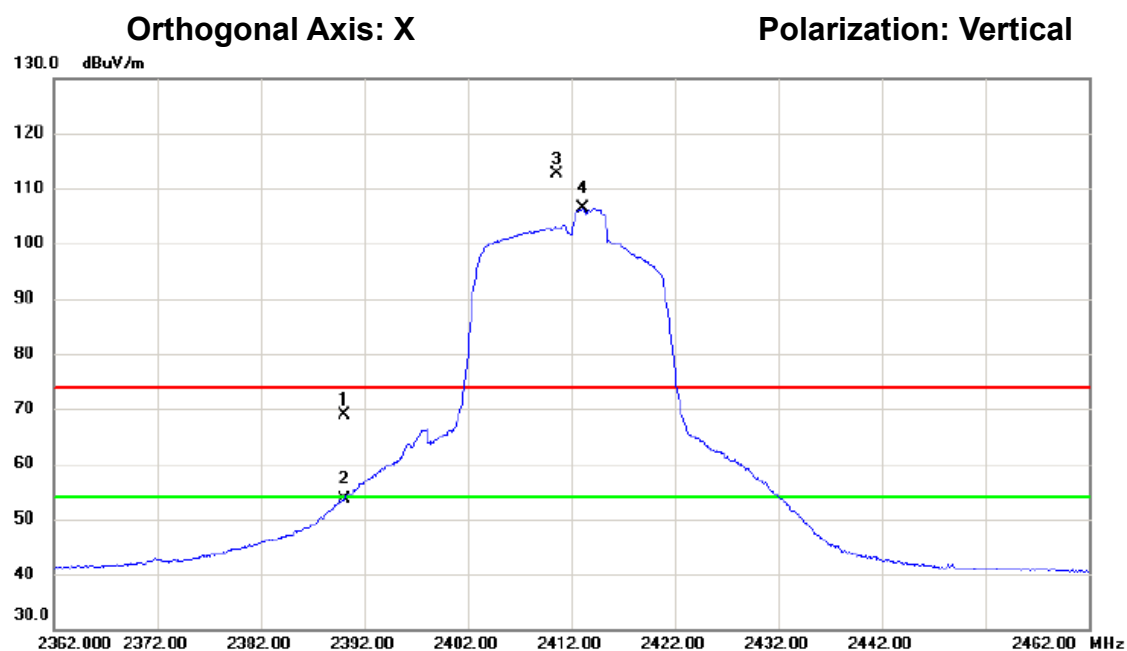

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	61.65	7.17	68.82	74.00	-5.18	peak	
2		2390.000	46.48	7.17	53.65	54.00	-0.35	AVG	
3	X	2410.600	105.46	7.24	112.70	74.00	38.70	peak	主波訊號不予判定
4	*	2413.200	99.03	7.24	106.27	54.00	52.27	AVG	主波訊號不予判定

測試頻道: IEEE vht20 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

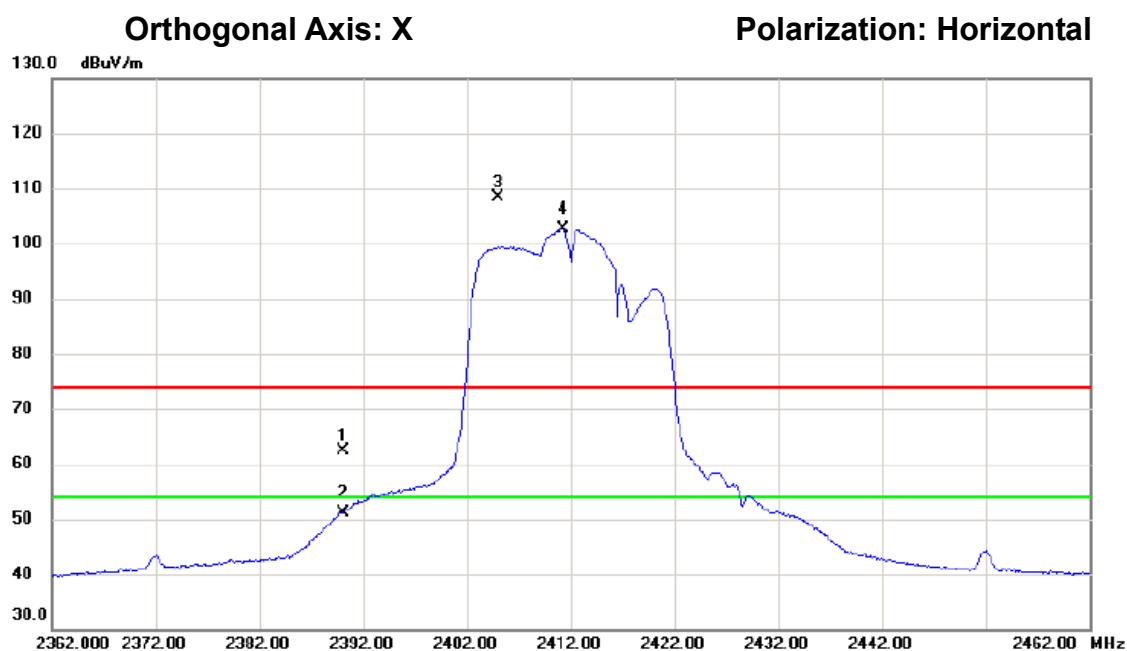

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	55.24	7.17	62.41	74.00	-11.59	peak	
2		2390.000	44.06	7.17	51.23	54.00	-2.77	AVG	
3	X	2404.950	101.11	7.21	108.32	74.00	34.32	peak	主波訊號不予判定
4	*	2411.250	95.46	7.24	102.70	54.00	48.70	AVG	主波訊號不予判定

測試頻道: IEEE vht20 /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

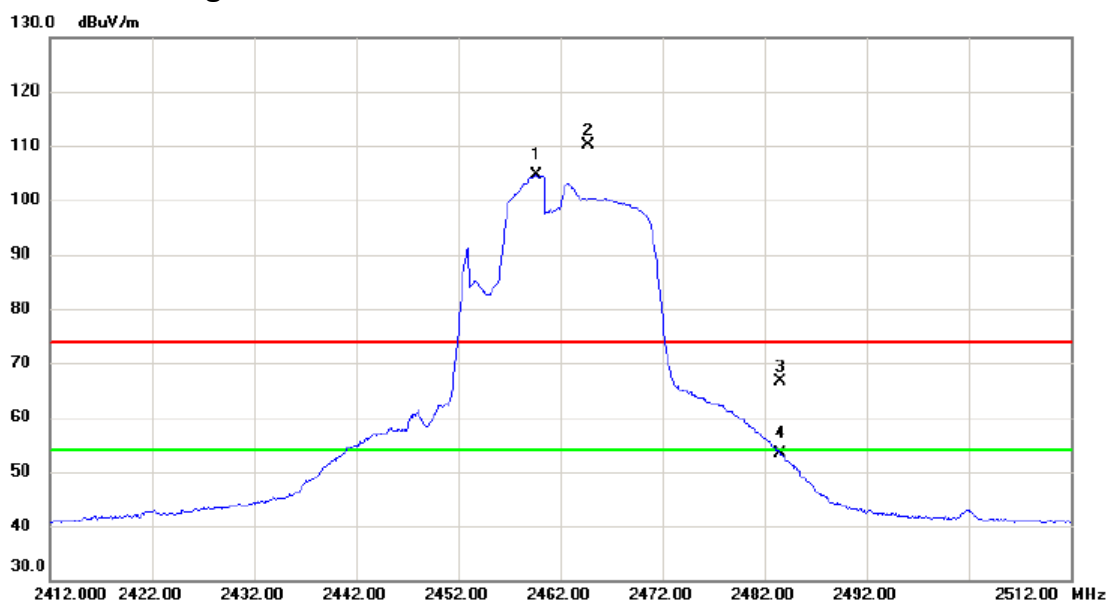

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.700	97.20	7.39	104.59	54.00	50.59	AVG	主波訊號不予判定
2	X	2464.750	102.62	7.40	110.02	74.00	36.02	peak	主波訊號不予判定
3		2483.500	59.11	7.47	66.58	74.00	-7.42	peak	
4		2483.500	45.94	7.47	53.41	54.00	-0.59	AVG	

測試頻道: IEEE vht20 /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

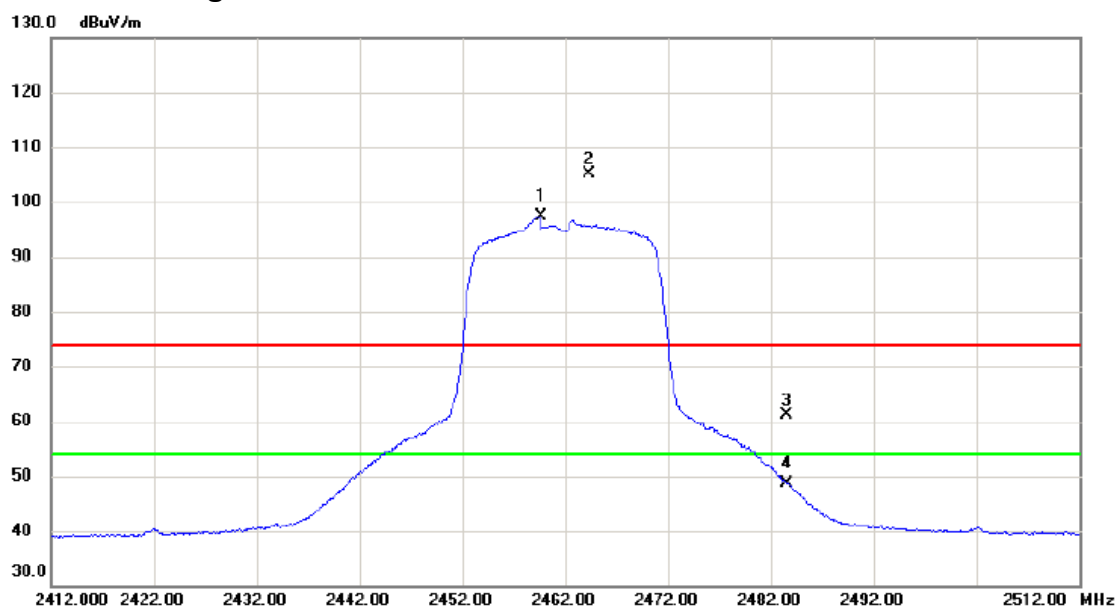

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.650	89.94	7.39	97.33	54.00	43.33	AVG	主波訊號不予判定
2	X	2464.350	97.70	7.40	105.10	74.00	31.10	peak	主波訊號不予判定
3		2483.500	53.59	7.47	61.06	74.00	-12.94	peak	
4		2483.500	41.19	7.47	48.66	54.00	-5.34	AVG	

測試頻道: IEEE vht40 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

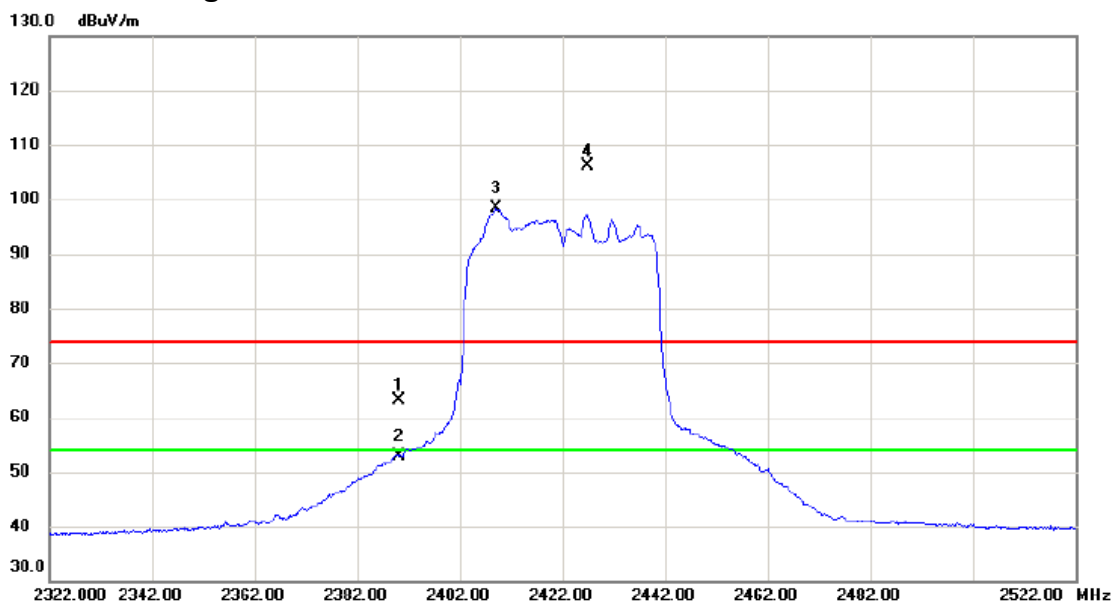

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.85	7.17	63.02	74.00	-10.98	peak	
2		2390.000	45.80	7.17	52.97	54.00	-1.03	AVG	
3	*	2409.200	91.07	7.23	98.30	54.00	44.30	AVG	主波訊號不予判定
4	X	2427.000	98.95	7.29	106.24	74.00	32.24	peak	主波訊號不予判定

測試頻道: IEEE vht40 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

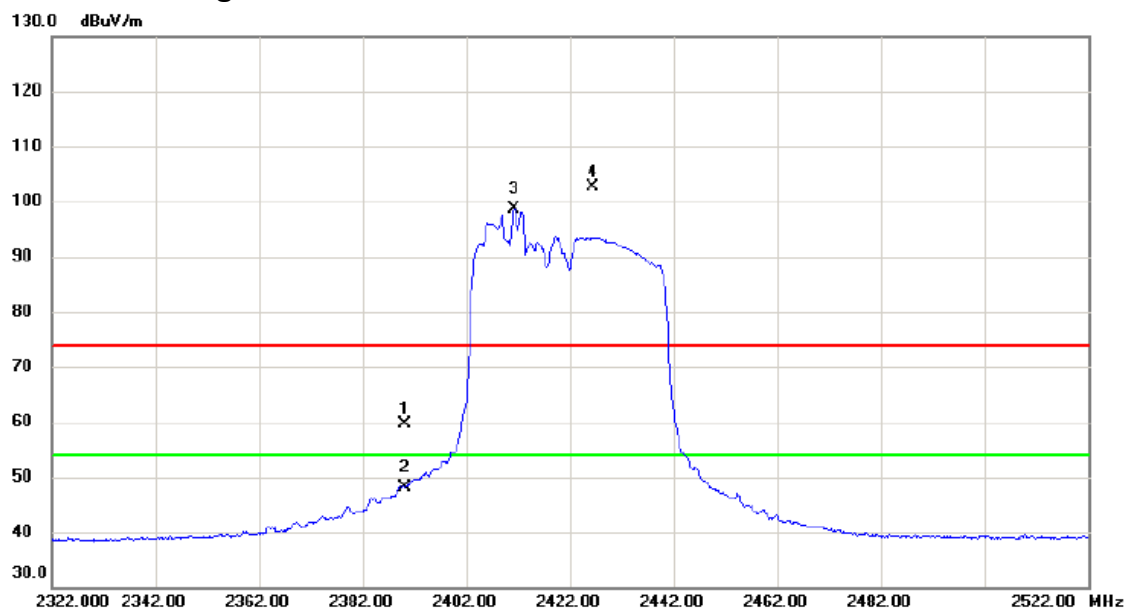

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	52.36	7.17	59.53	74.00	-14.47	peak	
2		2390.000	40.89	7.17	48.06	54.00	-5.94	AVG	
3	*	2411.300	91.49	7.24	98.73	54.00	44.73	AVG	主波訊號不予判定
4	X	2426.500	95.27	7.29	102.56	74.00	28.56	peak	主波訊號不予判定

測試頻道: IEEE vht40 /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

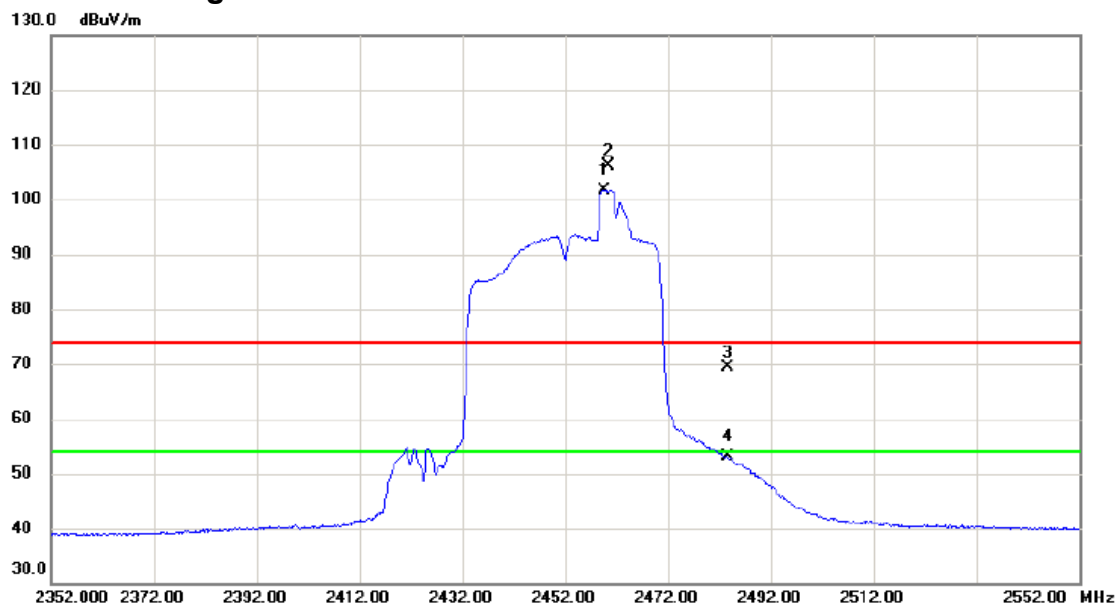

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2459.700	94.32	7.39	101.71	54.00	47.71	AVG	主波訊號不予判定
2	X	2460.500	98.70	7.39	106.09	74.00	32.09	peak	主波訊號不予判定
3		2483.500	61.87	7.47	69.34	74.00	-4.66	peak	
4		2483.500	45.71	7.47	53.18	54.00	-0.82	AVG	

測試頻道: IEEE vht40 /
2.4 GHz 頻帶/2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

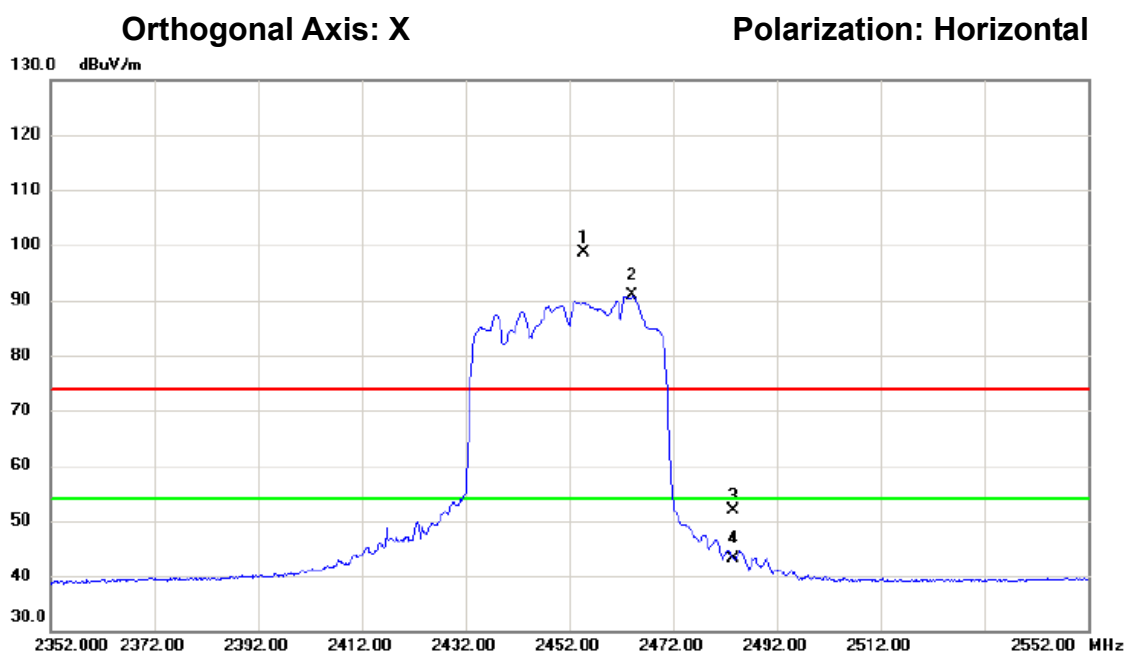

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.900	91.27	7.37	98.64	74.00	24.64	peak	主波訊號不予判定
2	*	2464.200	83.37	7.40	90.77	54.00	36.77	AVG	主波訊號不予判定
3		2483.500	44.37	7.47	51.84	74.00	-22.16	peak	
4		2483.500	35.76	7.47	43.23	54.00	-10.77	AVG	