

Test Report No.50299813 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50299813 001 AppendixD)

Contents


ANT, T8000	4
Spurious Emissions, Band Edges, 2.35-2.5G	4
Spurious Emissions, TX Mode, 1-18G.....	12
Spurious Emissions, TX Mode, 18-26G.....	18
Spurious Emissions, TX Mode, 30M-1G	24
Spurious Emissions, TX Mode, 9k-30M	26
Spurious Emissions, RX Mode, 1-18G	28
Spurious Emissions, RX Mode, 18-26G.....	30
Spurious Emissions, RX Mode, 30M-1G	32
Spurious Emissions, RX Mode, 9K-30M	34
Mains	36
BLE, T8000.....	38
Spurious Emissions, Band Edges, 2.35-2.5G	38
Spurious Emissions, TX Mode, 1-18G.....	46
Spurious Emissions, TX Mode, 18-26G.....	52
Spurious Emissions, TX Mode, 30M-1G	58
Spurious Emissions, TX Mode, 9k-30M	60
Spurious Emissions, RX Mode, 1-18G	62
Spurious Emissions, RX Mode, 18-26G.....	64
Spurious Emissions, RX Mode, 30M-1G	66
Spurious Emissions, RX Mode, 9K-30M	68
Mains	70
ANT, T8000D	72
Spurious Emissions, Band Edges, 2.35-2.5G	72
Spurious Emissions, TX Mode, 1-18G.....	80
Spurious Emissions, TX Mode, 18-26G.....	86
Spurious Emissions, TX Mode, 30M-1G	92
Spurious Emissions, TX Mode, 9k-30M	94
Spurious Emissions, RX Mode, 1-18G	96
Spurious Emissions, RX Mode, 18-26G.....	98
Spurious Emissions, RX Mode, 30M-1G	100
Spurious Emissions, RX Mode, 9K-30M	102
Mains	104
BLE, T8000D.....	106
Spurious Emissions, Band Edges, 2.35-2.5G	106
Spurious Emissions, TX Mode, 1-18G.....	114
Spurious Emissions, TX Mode, 18-26G.....	120
Spurious Emissions, TX Mode, 30M-1G	126
Spurious Emissions, TX Mode, 9k-30M	128
Spurious Emissions, RX Mode, 1-18G	130
Spurious Emissions, RX Mode, 18-26G.....	132

Spurious Emissions, RX Mode, 30M-1G	134
Spurious Emissions, RX Mode, 9K-30M	136
Mains	138

Spurious Emissions, Band Edges, 2.35-2.5G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

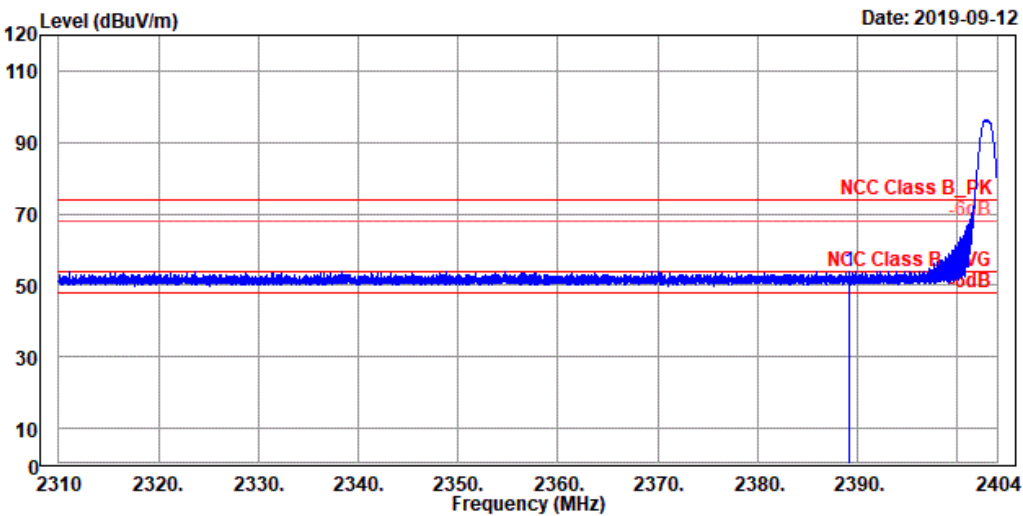


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2389.140	53.98	16.68	37.30	74.00	-20.02	150	34	Peak

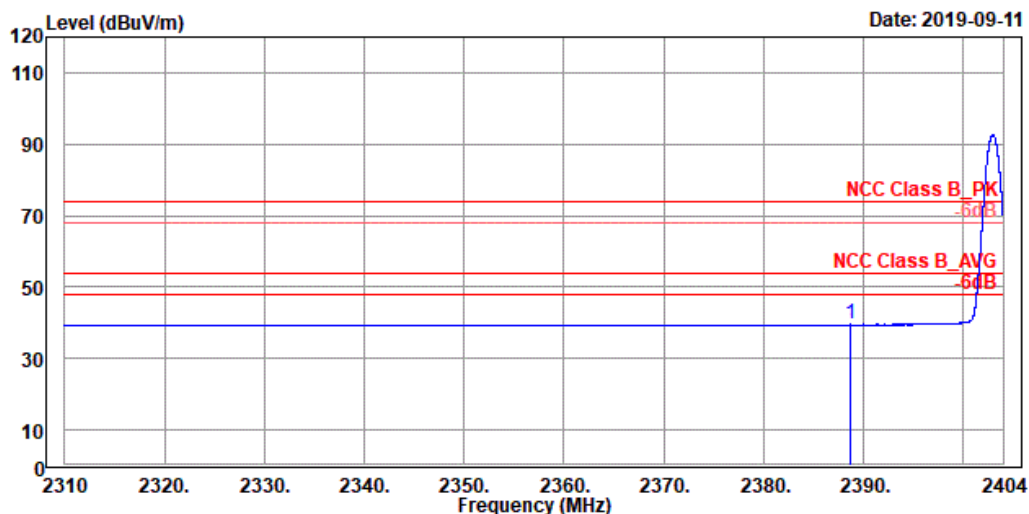


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2388.725	39.47	2.17	37.30	54.00	-14.53	150	34	Average

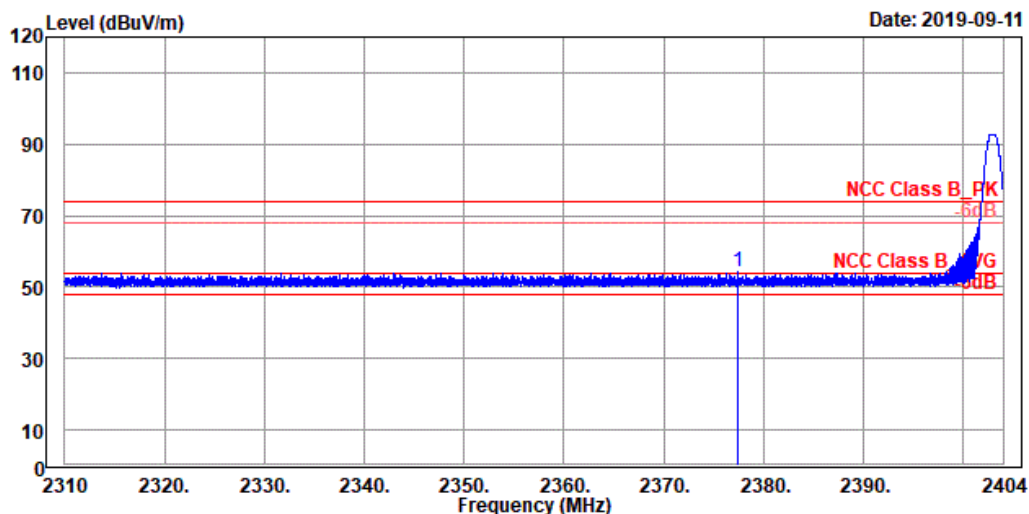


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2377.453	54.17	16.91	37.26	74.00	-19.83	101	299	Peak

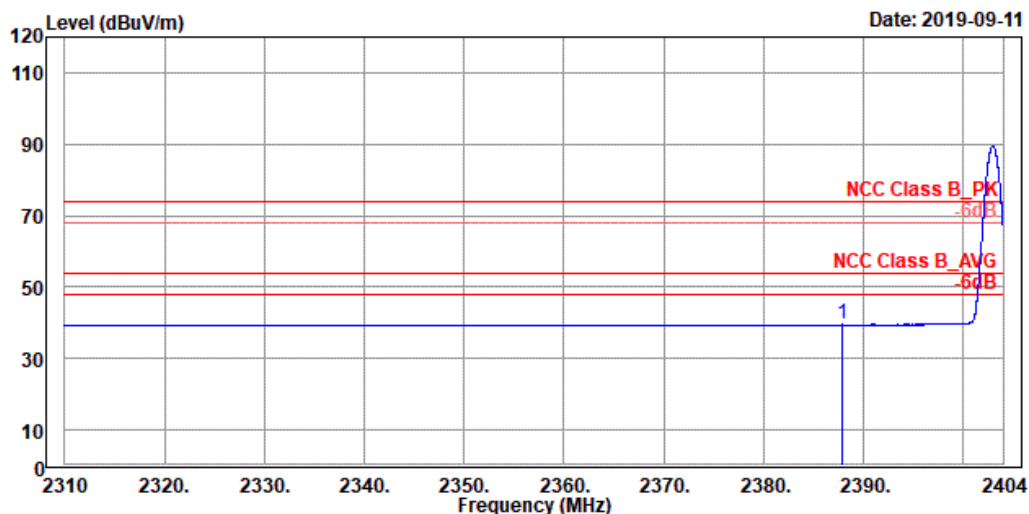


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2387.871	39.48	2.18	37.30	54.00	-14.52	101	299	Average

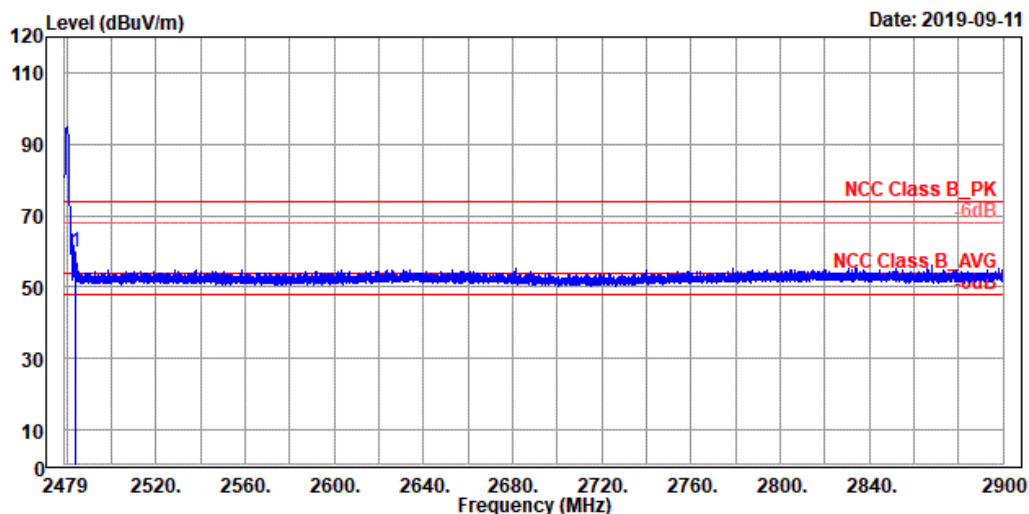


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.701	59.60	22.03	37.57	74.00	-14.40	155	337	Peak

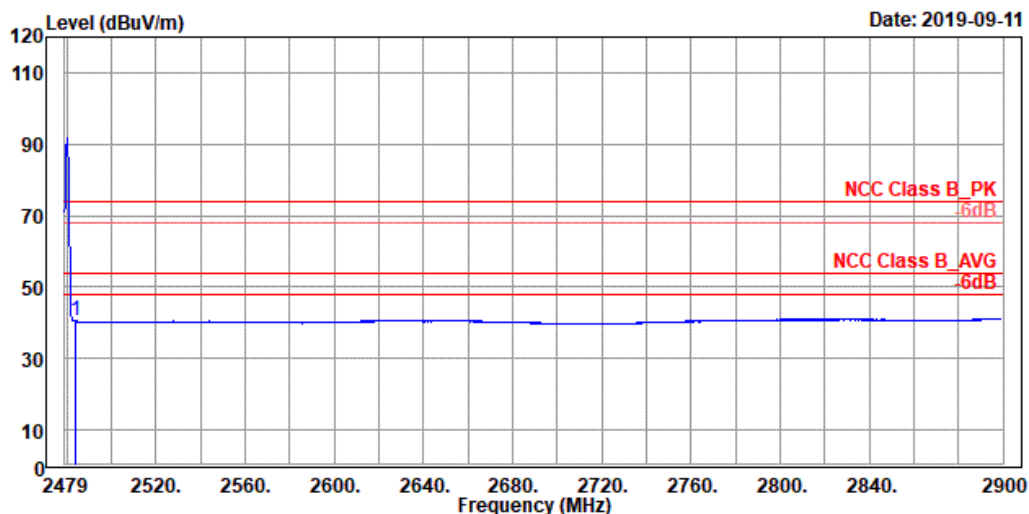


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.500	40.47	2.90	37.57	54.00	-13.53	155	337	Average

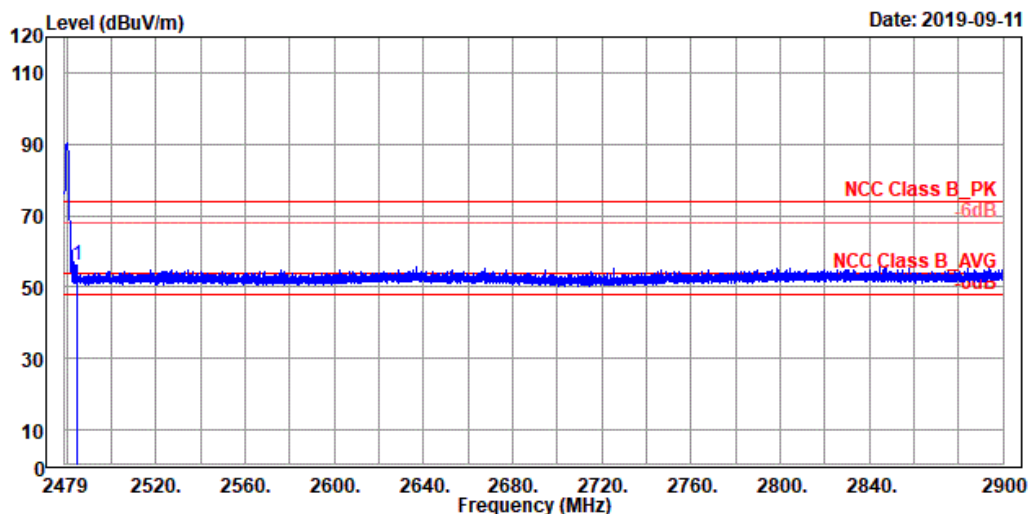

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2484.192	56.09	18.52	37.57	74.00	-17.91	100	353	Peak

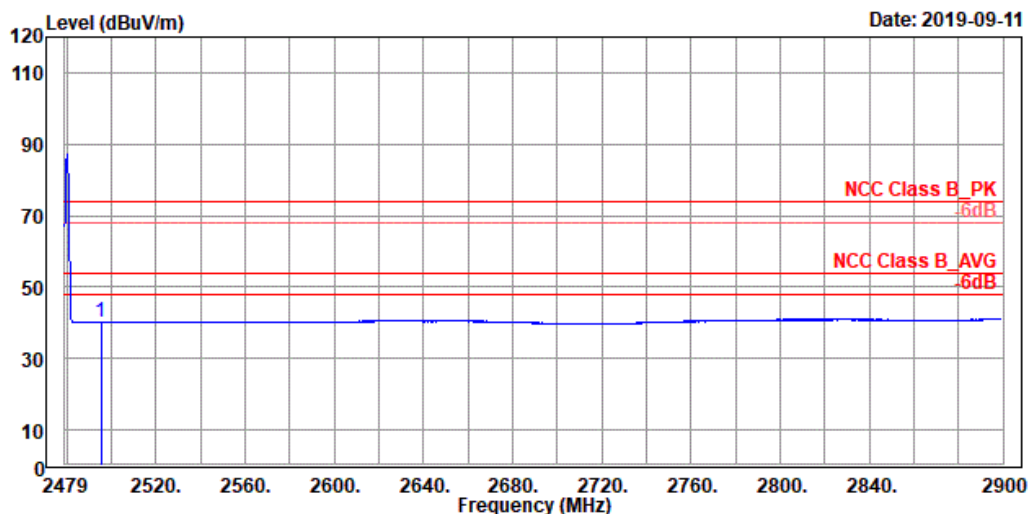


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2495.138	40.29	2.73	37.56	54.00	-13.71	100	353	Average

Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

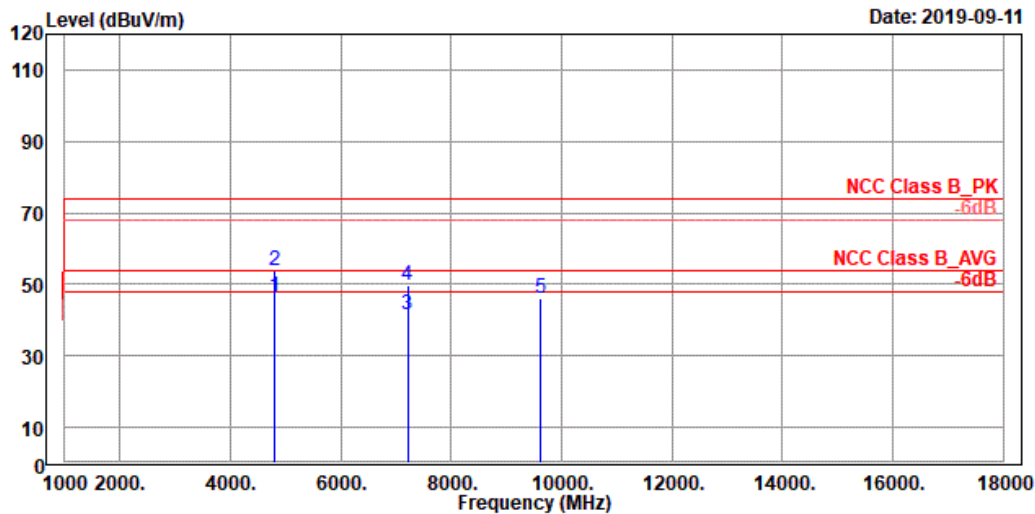


Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4806.000	46.36	55.82	-9.46	54.00	-7.64	241	0	Average
2	4806.000	53.99	63.45	-9.46	74.00	-20.01	241	0	Peak
3	7209.000	41.52	48.35	-6.83	54.00	-12.48	167	357	Average
4	7209.000	49.68	56.51	-6.83	74.00	-24.32	167	357	Peak
5	9612.000	45.87	50.01	-4.14	74.00	-28.13	100	360	Peak

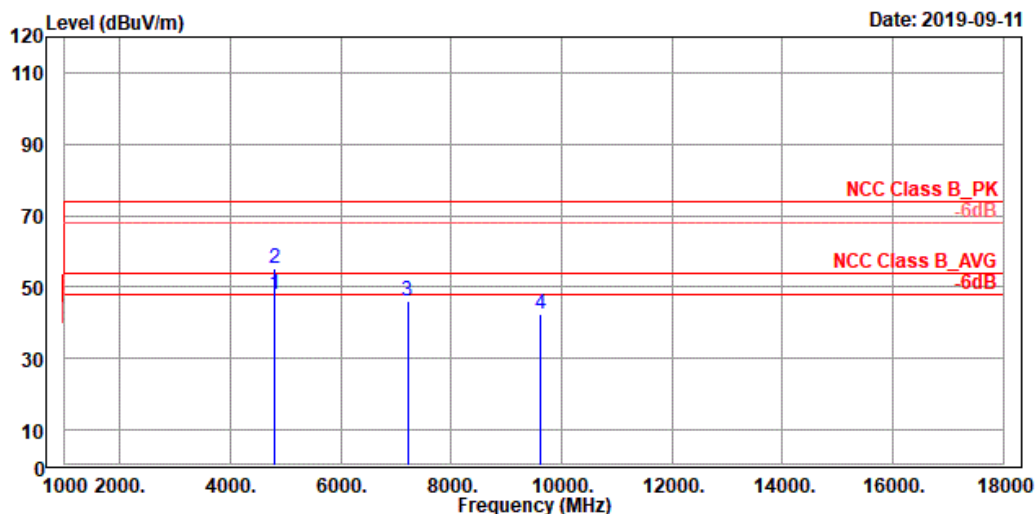


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4806.000	47.71	57.17	-9.46	54.00	-6.29	154	360	Average
2	4806.000	55.43	64.89	-9.46	74.00	-18.57	154	360	Peak
3	7209.000	46.13	52.96	-6.83	74.00	-27.87	100	200	Peak
4	9612.000	42.53	46.67	-4.14	74.00	-31.47	140	360	Peak

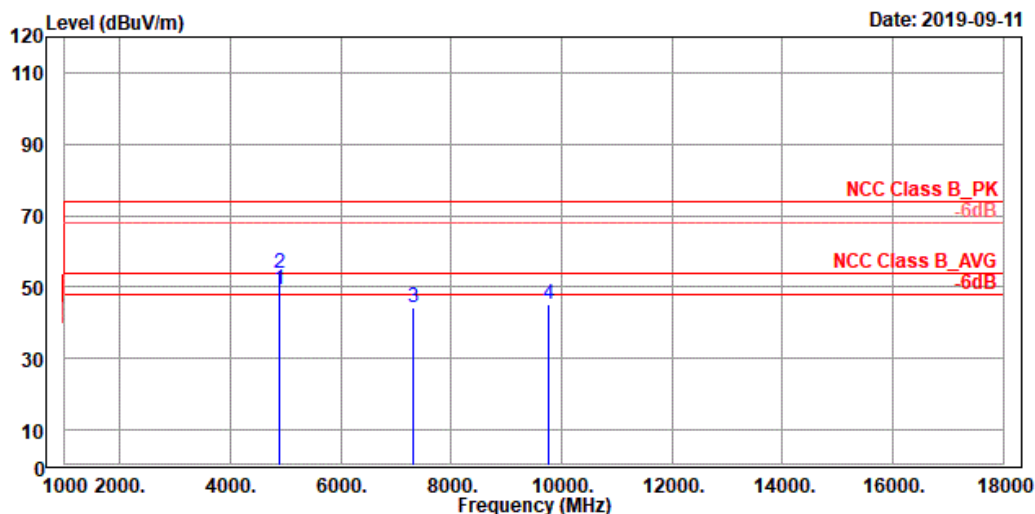


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	4884.000	49.14	58.64	-9.50	54.00	-4.86	124	360	Average
2	4884.000	53.74	63.24	-9.50	74.00	-20.26	124	360	Peak
3	7326.000	44.06	50.87	-6.81	74.00	-29.94	200	248	Peak
4	9768.000	45.02	48.88	-3.86	74.00	-28.98	200	309	Peak

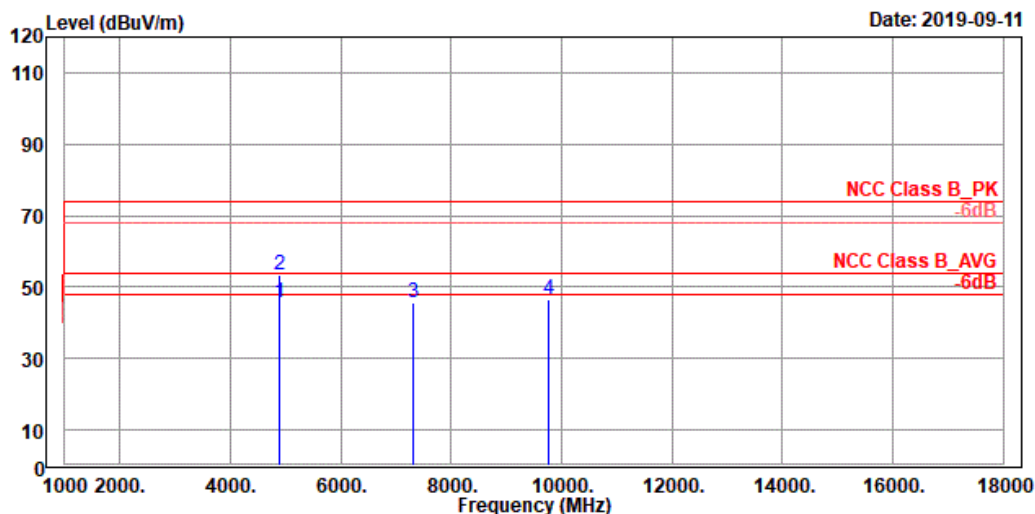


Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4884.000	45.77	55.27	-9.50	54.00	-8.23	149	360	Average
2	4884.000	53.51	63.01	-9.50	74.00	-20.49	149	360	Peak
3	7326.000	45.81	52.62	-6.81	74.00	-28.19	100	25	Peak
4	9768.000	46.32	50.18	-3.86	74.00	-27.68	100	328	Peak

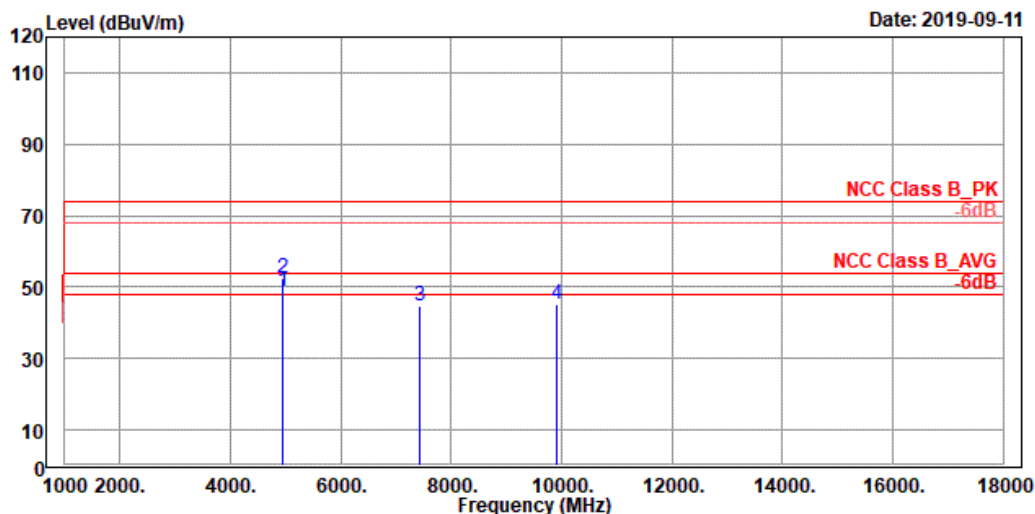

Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	4960.000	49.02	58.47	-9.45	54.00	-4.98	100	317	Average
2	4960.000	52.25	61.70	-9.45	74.00	-21.75	100	317	Peak
3	7440.000	44.70	51.40	-6.70	74.00	-29.30	400	33	Peak
4	9920.000	45.23	48.81	-3.58	74.00	-28.77	200	335	Peak

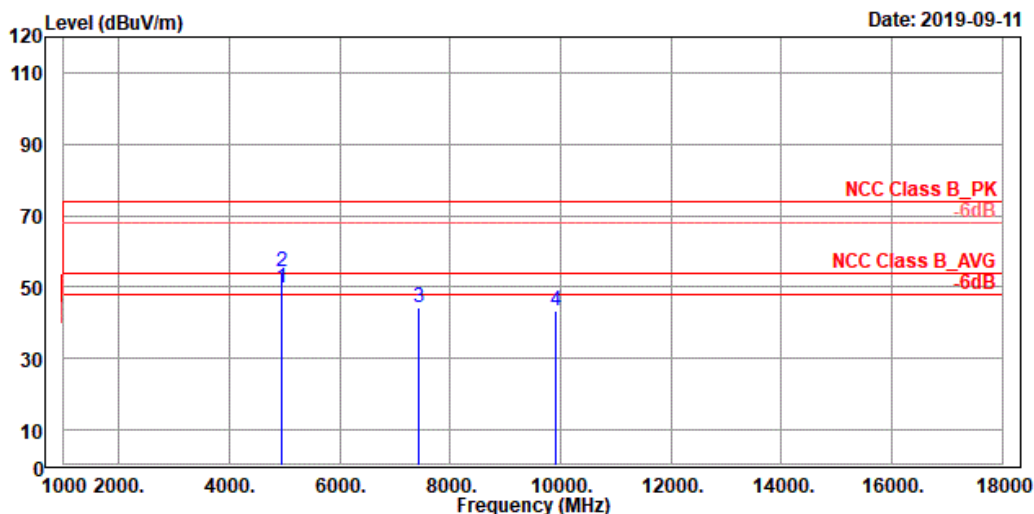


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	4960.000	49.90	59.35	-9.45	54.00	-4.10	122	360	Average
2	4960.000	54.25	63.70	-9.45	74.00	-19.75	122	360	Peak
3	7440.000	44.48	51.18	-6.70	74.00	-29.52	328	360	Peak
4	9920.000	43.45	47.03	-3.58	74.00	-30.55	100	347	Peak

Spurious Emissions, TX Mode, 18-26G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

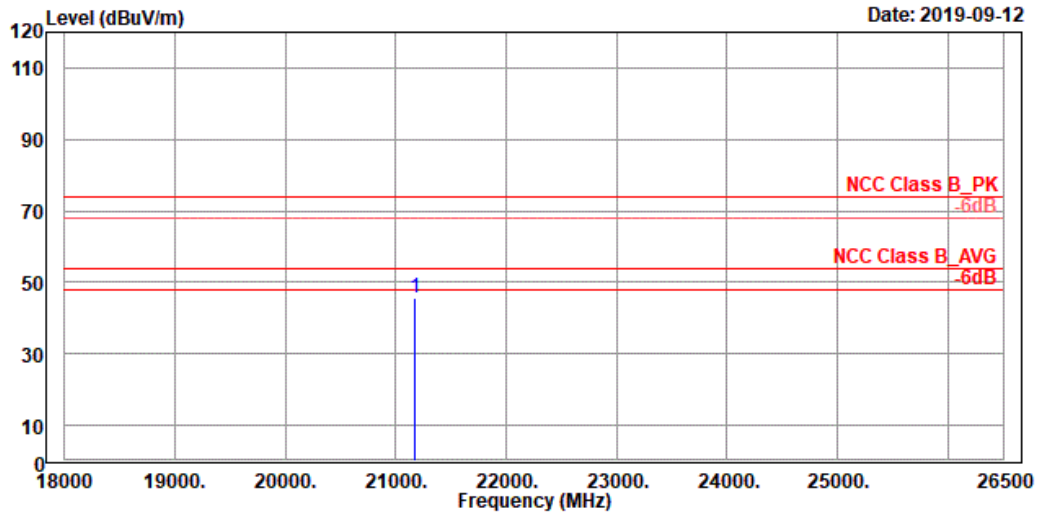


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	21171.470	45.55	43.82	1.73	74.00	-28.45	100	64	Peak

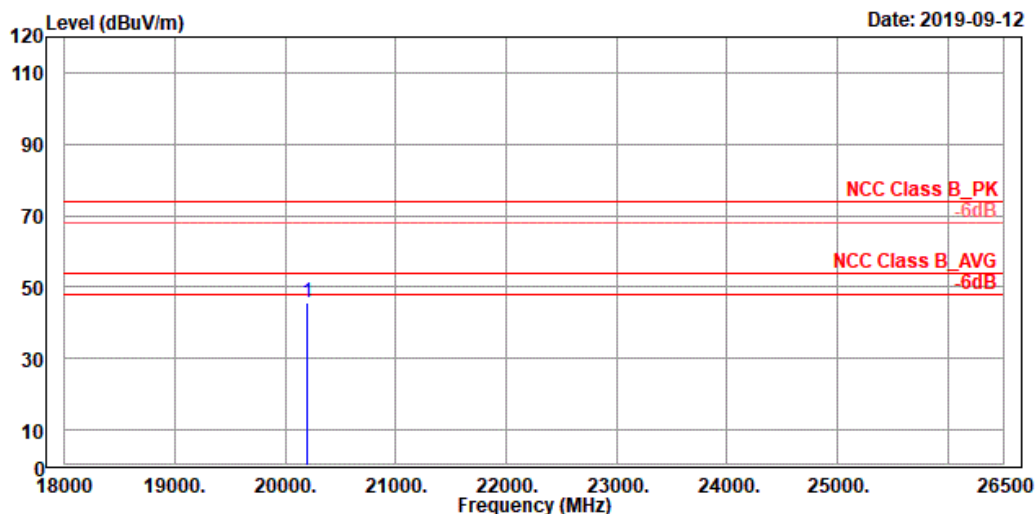


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	20200.970	45.62	44.94	0.68	74.00	-28.38	100	34	Peak

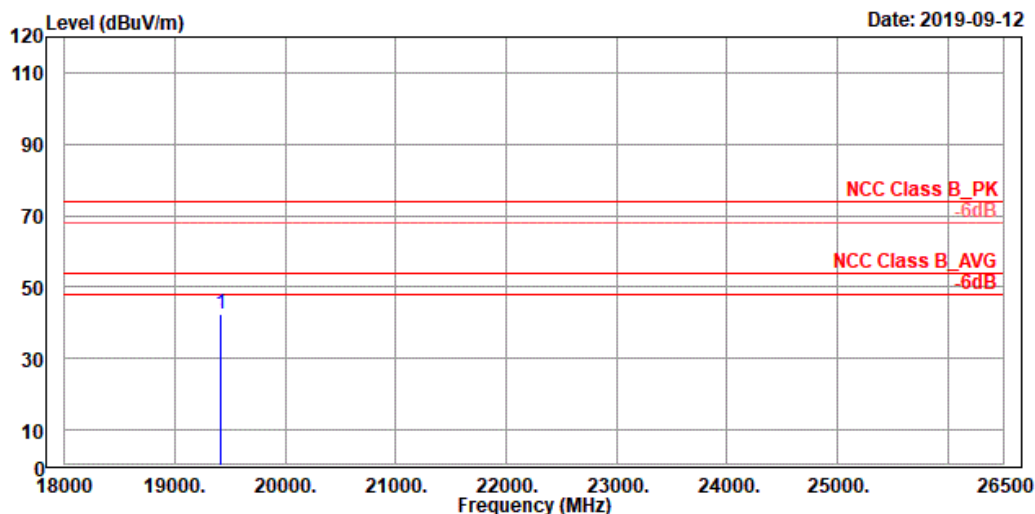


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19405.450	42.48	42.86	-0.38	74.00	-31.52	100	198	Peak

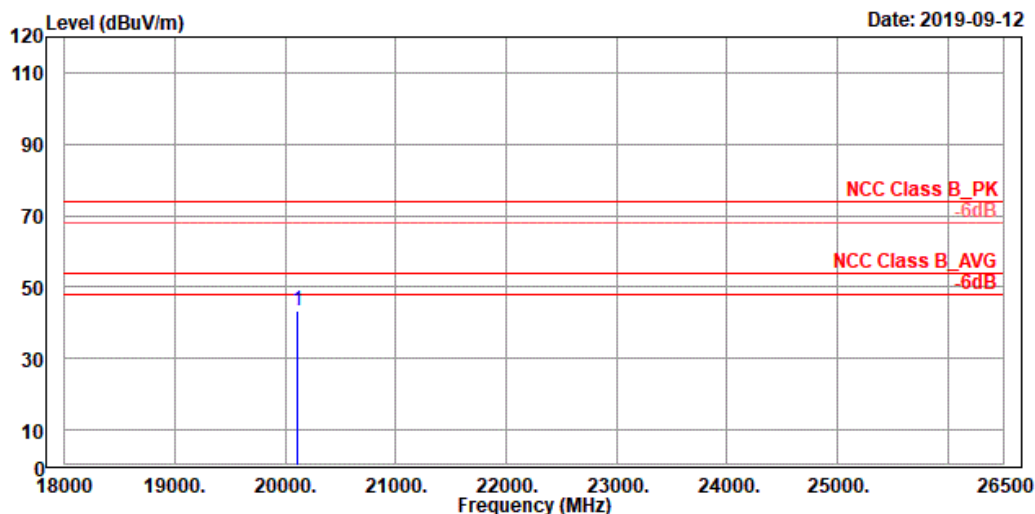


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	20104.630	43.53	43.01	0.52	74.00	-30.47	100	234	Peak

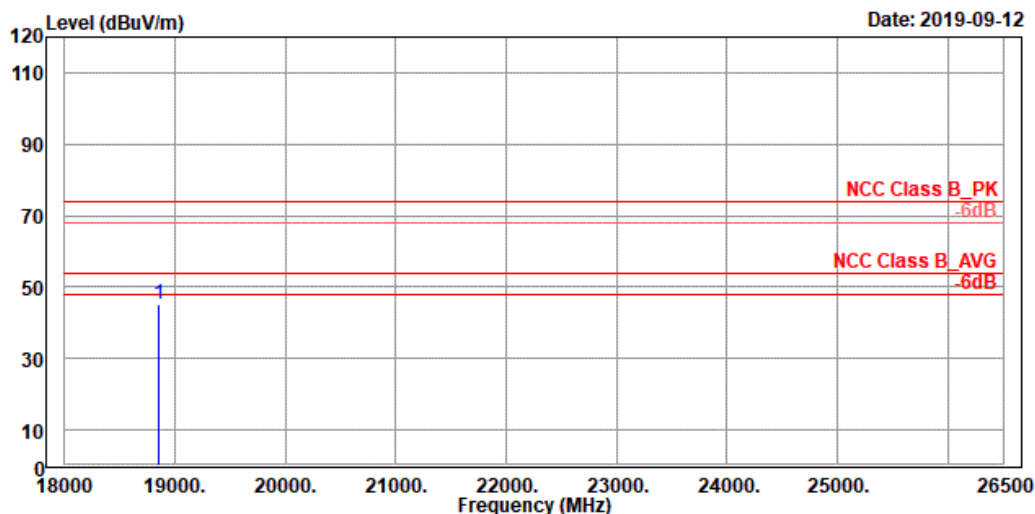

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18848.650	45.06	45.61	-0.55	74.00	-28.94	100	35	Peak

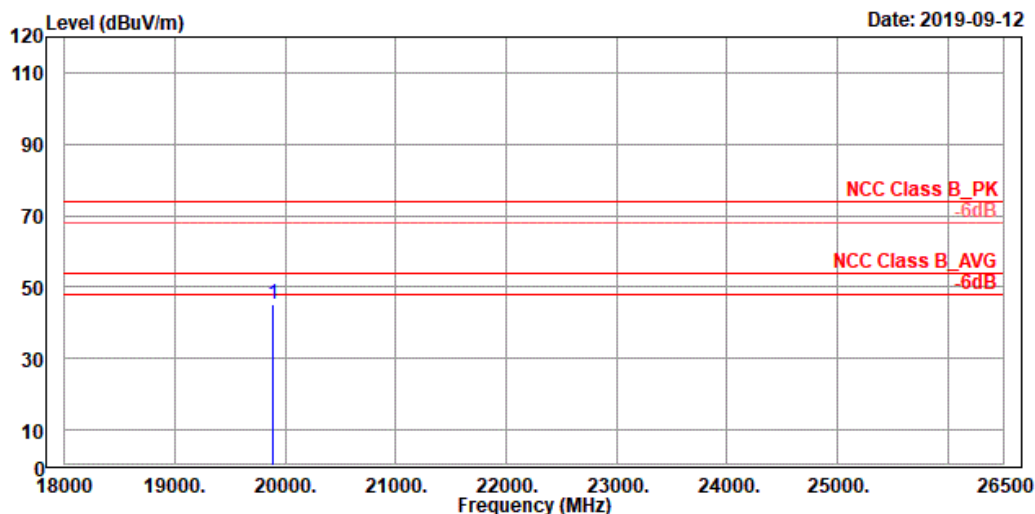


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19889.990	45.38	45.18	0.20	74.00	-28.62	100	315	Peak

Spurious Emissions, TX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

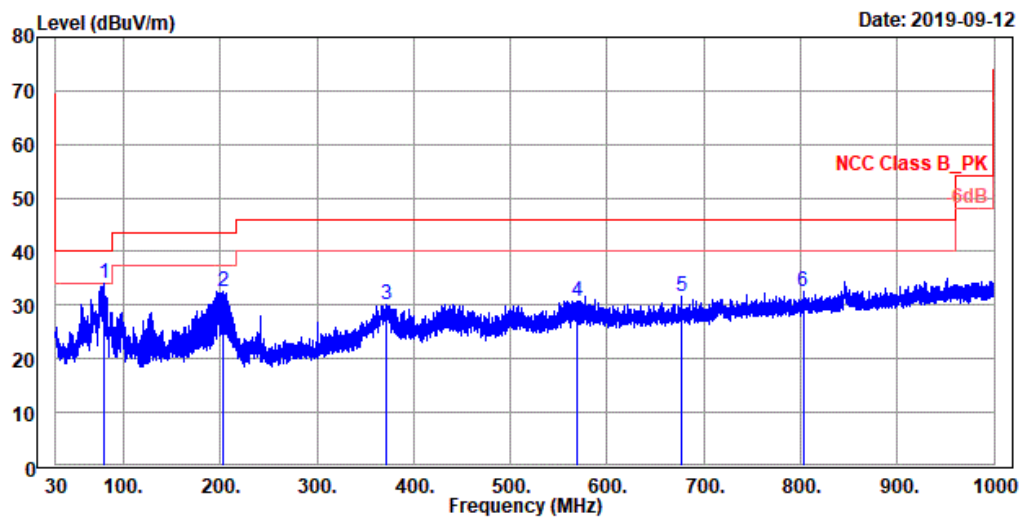

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz

	Freq	Level	Read	Limit	Over	APos	TPos	Remark
	MHz	dBuV/m	Level	Factor	Line	Limit		
			dBuV	dB/m	dBuV/m	dB	cm	deg
1	80.359	33.92	44.82	-10.90	40.00	-6.08	100	211 QP
2	202.741	32.67	41.03	-8.36	43.50	-10.83	100	131 QP
3	371.198	30.04	33.70	-3.66	46.00	-15.96	138	360 QP
4	568.835	30.86	31.44	-0.58	46.00	-15.14	200	203 QP
5	676.748	31.61	30.56	1.05	46.00	-14.39	200	154 QP
6	802.686	32.41	29.55	2.86	46.00	-13.59	100	312 QP

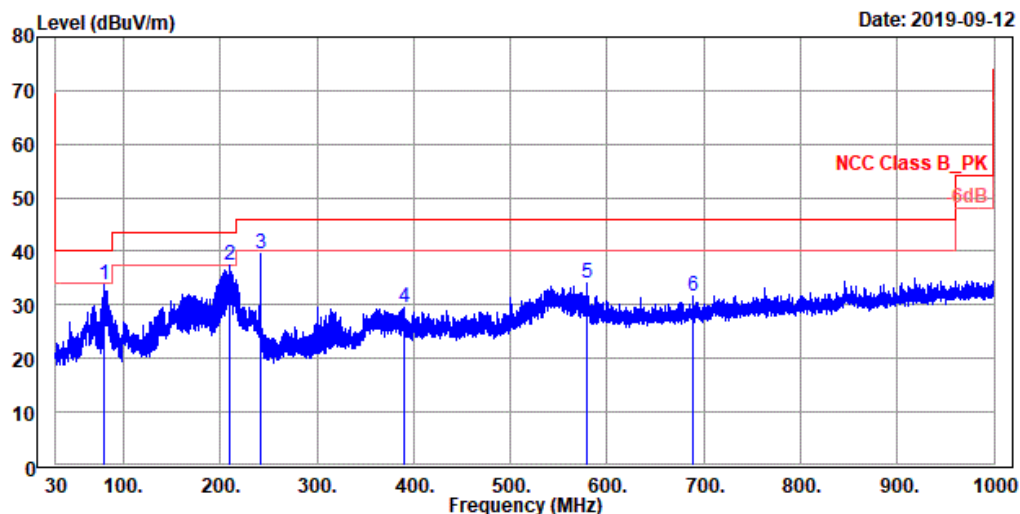


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	80.359	33.86	44.76	-10.90	40.00	-6.14	253	0	QP
2	208.965	37.40	45.70	-8.30	43.50	-6.10	100	215	QP
3	241.056	39.66	46.49	-6.83	46.00	-6.34	100	28	QP
4	390.759	29.54	32.83	-3.29	46.00	-16.46	219	0	QP
5	578.616	33.98	34.37	-0.39	46.00	-12.02	100	28	QP
6	688.226	31.78	30.53	1.25	46.00	-14.22	100	222	QP

Spurious Emissions, TX Mode, 9k-30M




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

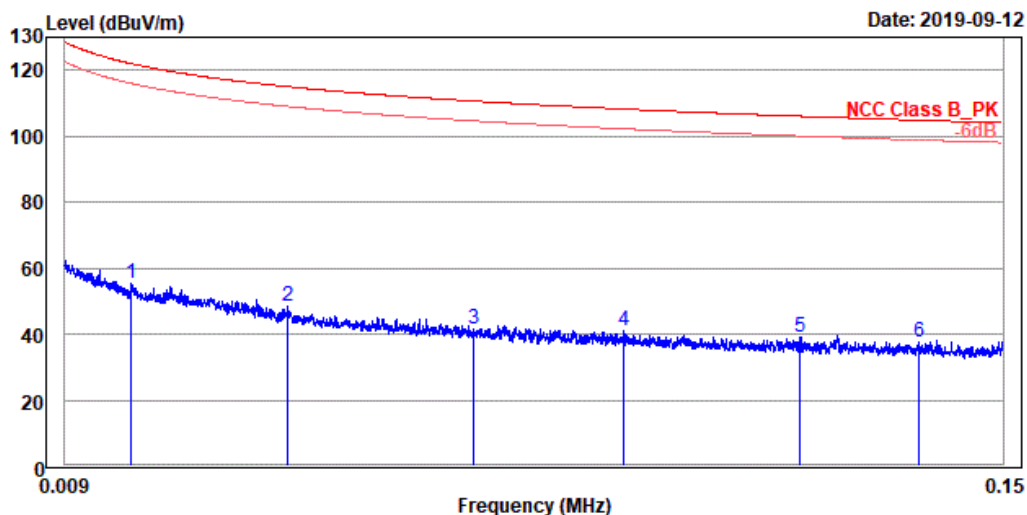

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.019	55.26	-17.98	73.24	122.06	-66.80	100	312	QP
2	0.043	48.29	-18.63	66.92	115.02	-66.73	100	258	QP
3	0.070	41.70	-20.60	62.30	110.63	-68.93	100	122	QP
4	0.093	40.99	-19.09	60.08	108.22	-67.23	100	322	QP
5	0.120	39.26	-18.85	58.11	106.04	-66.78	100	360	QP
6	0.137	37.37	-19.72	57.09	104.84	-67.47	100	10	QP

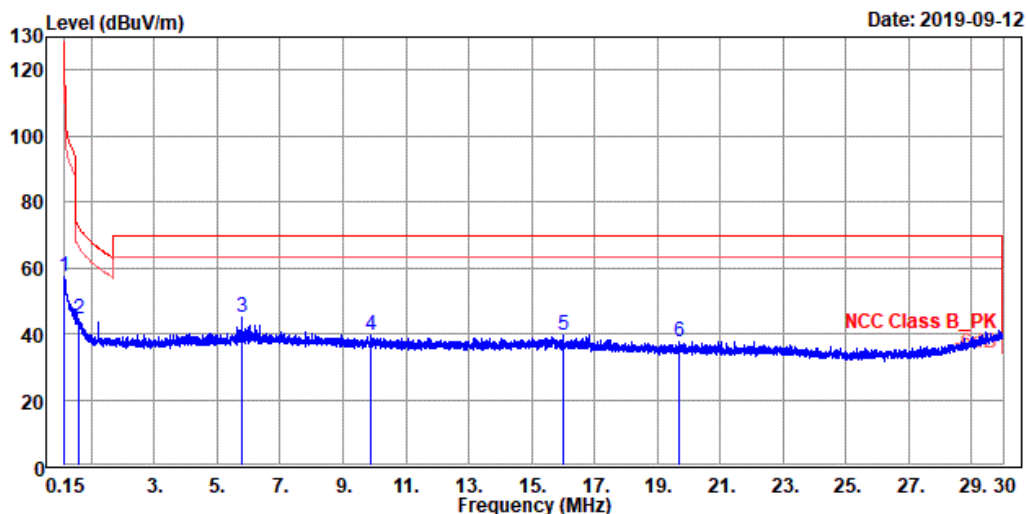


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.150	57.54	1.19	56.35	104.08	-46.54	100	32	QP
2	0.598	44.33	-0.87	45.20	72.07	-27.74	100	14	QP
3	5.794	44.89	6.53	38.36	69.50	-24.61	100	25	QP
4	9.896	39.30	1.69	37.61	69.50	-30.20	100	111	QP
5	16.023	39.67	2.15	37.52	69.50	-29.83	100	221	QP
6	19.699	37.78	1.46	36.32	69.50	-31.72	100	312	QP

Spurious Emissions, RX Mode, 1-18G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

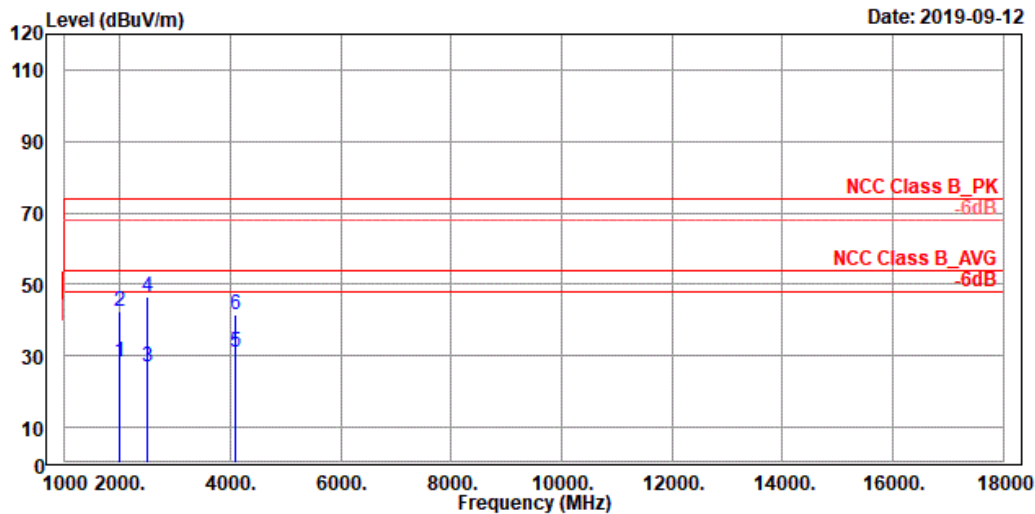

Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	1990.333	28.11	43.23	-15.12	54.00	-25.89	200	222	Average
2	1990.333	42.26	57.38	-15.12	74.00	-31.74	200	222	Peak
3	2498.958	26.83	40.36	-13.53	54.00	-27.17	200	188	Average
4	2498.958	46.43	59.96	-13.53	74.00	-27.57	200	188	Peak
5	4081.507	30.82	41.32	-10.50	54.00	-23.18	100	45	Average
6	4081.507	41.38	51.88	-10.50	74.00	-32.62	100	45	Peak

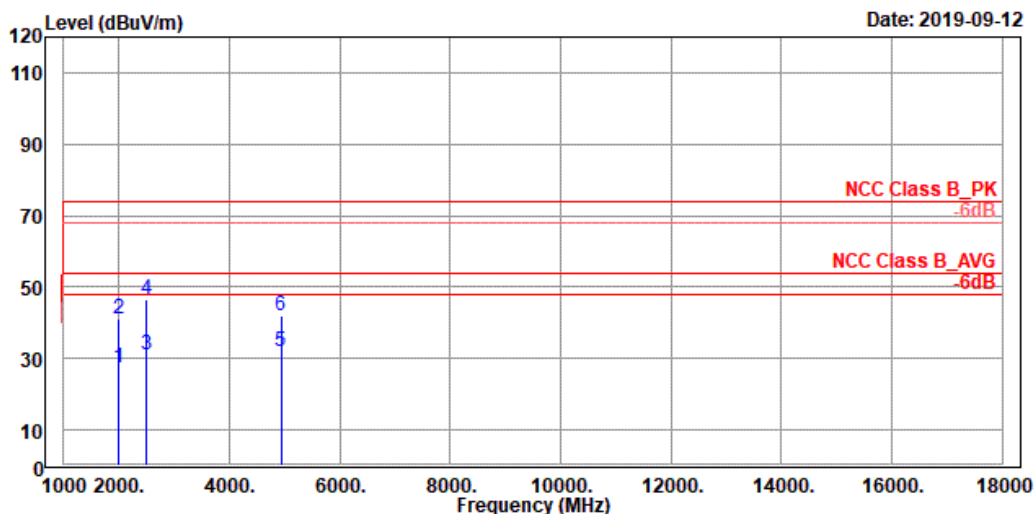


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	1994.583	27.23	42.31	-15.08	54.00	-26.77	100	164	Average
2	1994.583	41.12	56.20	-15.08	74.00	-32.88	100	164	Peak
3	2490.458	30.86	44.38	-13.52	54.00	-23.14	200	196	Average
4	2490.458	46.56	60.08	-13.52	74.00	-27.44	200	196	Peak
5	4932.995	31.82	41.29	-9.47	54.00	-22.18	100	360	Average
6	4932.995	41.80	51.27	-9.47	74.00	-32.20	100	360	Peak

Spurious Emissions, RX Mode, 18-26G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

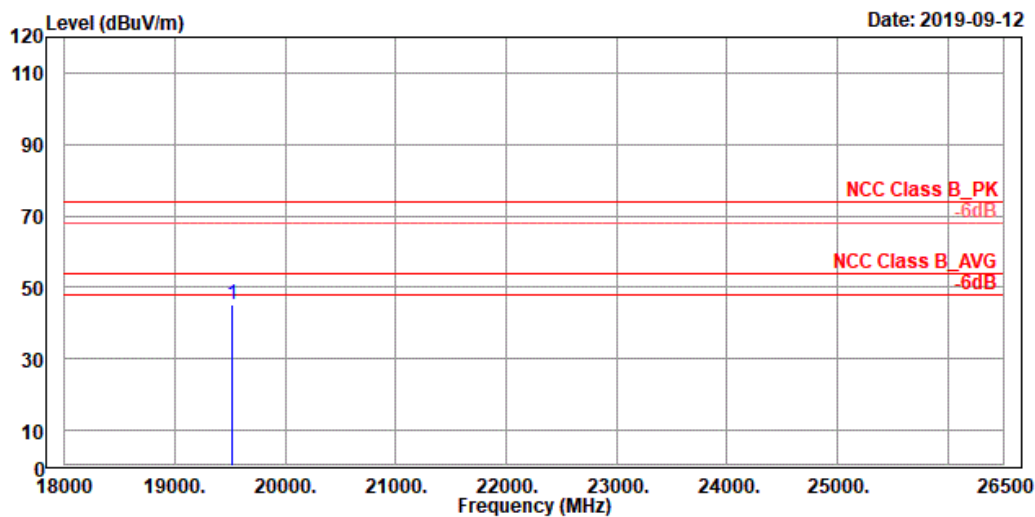

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19509.580	45.01	45.32	-0.31	74.00	-28.99	100	37	Peak

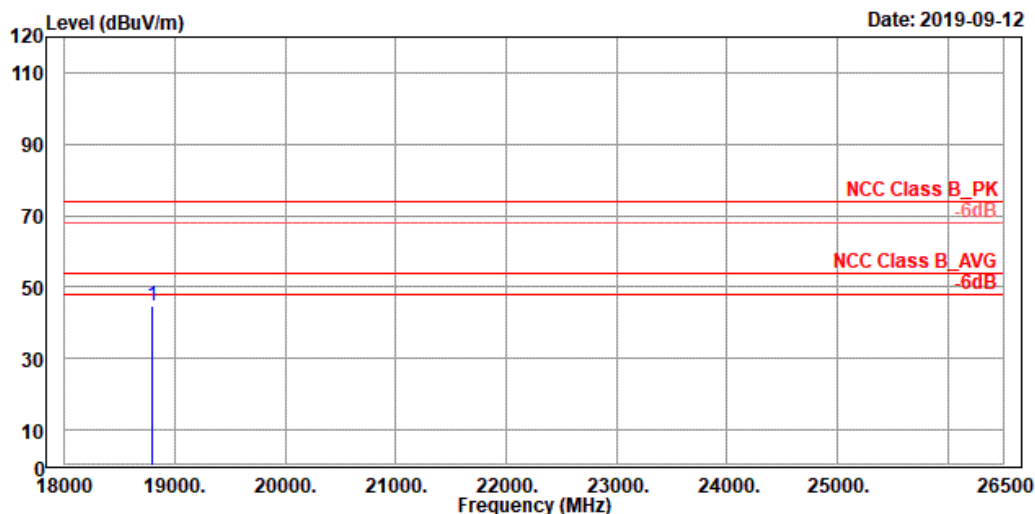


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark
		Level		Line	Limit			
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 18791.270	44.59	45.19	-0.60	74.00	-29.41	100	12	Peak

Spurious Emissions, RX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

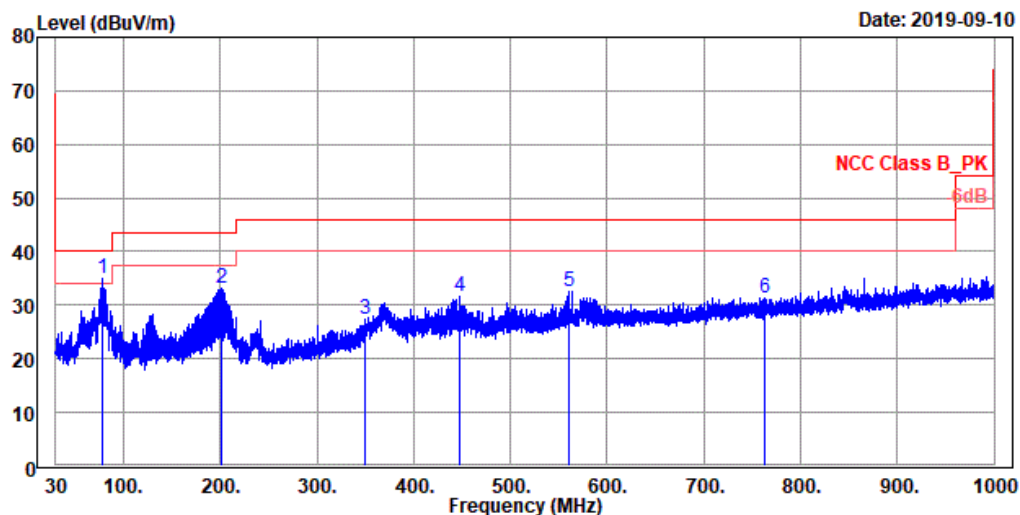

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read	Limit	Over	APos	TPos	Remark
	MHz	dBuV/m	Level	Factor	Line	Limit		
			dBuV	dB/m	dBuV/m	dB	cm	deg
1 !	77.611	34.90	45.25	-10.35	40.00	-5.10	100	24 Peak
2	200.801	33.28	41.68	-8.40	43.50	-10.22	100	142 Peak
3	349.453	27.42	31.53	-4.11	46.00	-18.58	101	360 Peak
4	447.181	31.50	33.72	-2.22	46.00	-14.50	100	360 Peak
5	560.671	32.60	33.37	-0.77	46.00	-13.40	100	62 Peak
6	763.643	31.29	28.86	2.43	46.00	-14.71	109	360 Peak

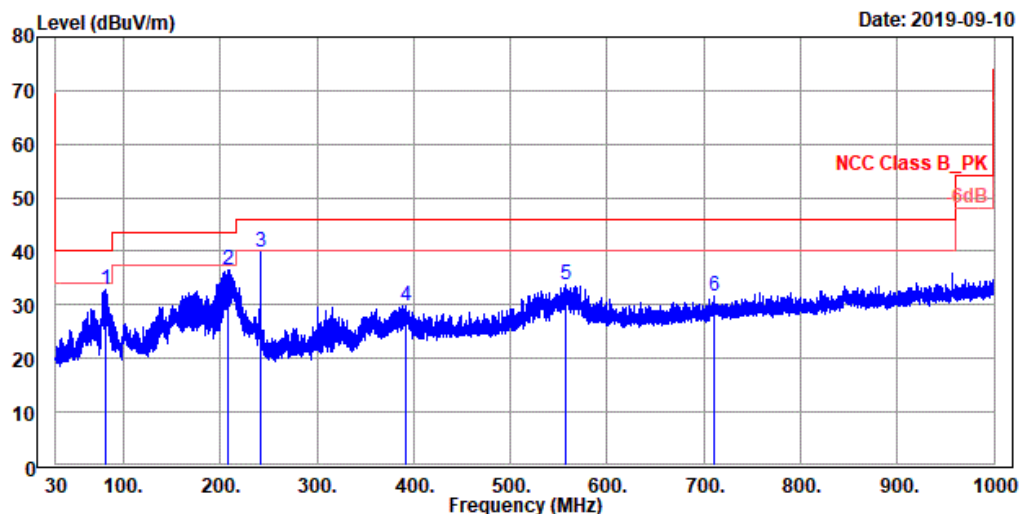


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	81.491	32.78	43.90	-11.12	40.00	-7.22	229	0	Peak
2	208.561	36.55	44.85	-8.30	43.50	-6.95	100	231	Peak
3	241.056	39.99	46.82	-6.83	46.00	-6.01	100	42	Peak
4	391.972	29.95	33.21	-3.26	46.00	-16.05	200	4	Peak
5	557.033	33.90	34.73	-0.83	46.00	-12.10	200	15	Peak
6	710.536	31.67	30.22	1.45	46.00	-14.33	100	291	Peak

Spurious Emissions, RX Mode, 9K-30M




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

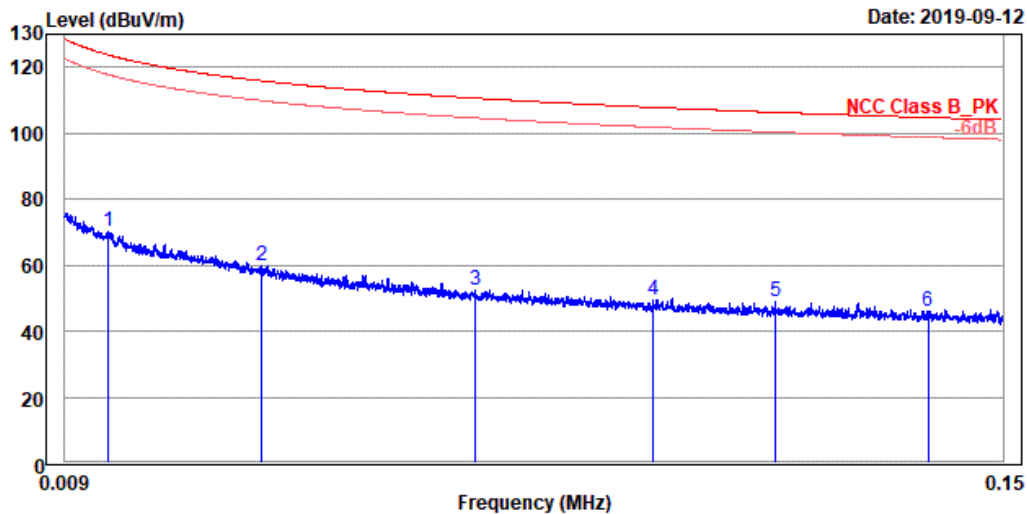

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.015	70.41	-4.97	75.38	123.79	-53.38	100	123	QP
2	0.038	59.75	-8.29	68.04	115.89	-56.14	100	145	QP
3	0.071	52.37	-9.91	62.28	110.62	-58.25	100	142	QP
4	0.097	49.31	-10.25	59.56	107.83	-58.52	100	120	QP
5	0.116	48.83	-9.50	58.33	106.32	-57.49	100	184	QP
6	0.139	46.20	-10.80	57.00	104.76	-58.56	100	312	QP

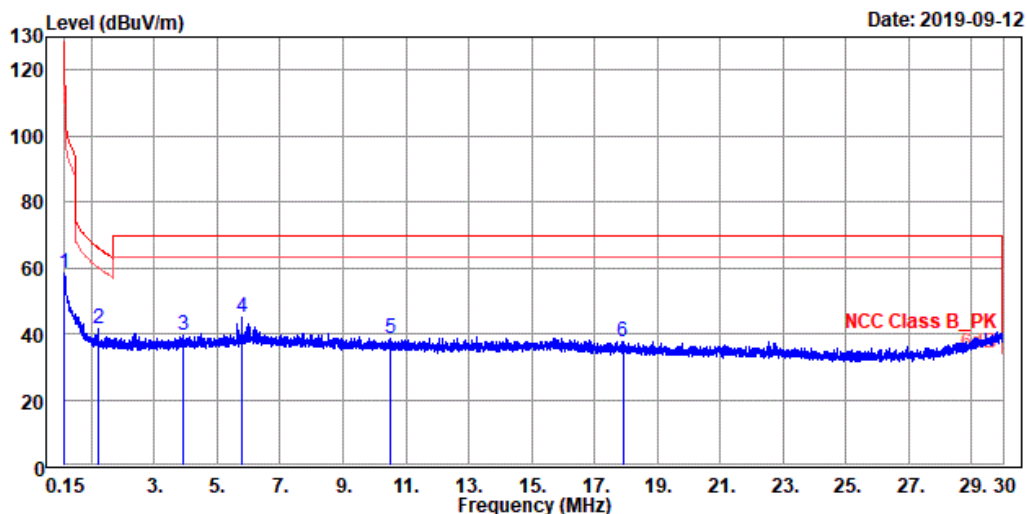


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.150	58.32	1.97	56.35	104.08	-45.76	100	312	QP
2	1.225	41.75	2.06	39.69	65.84	-24.09	100	255	QP
3	3.904	39.30	0.98	38.32	69.50	-30.20	100	45	QP
4	5.797	44.96	6.60	38.36	69.50	-24.54	100	57	QP
5	10.505	38.53	1.14	37.39	69.50	-30.97	100	2	QP
6	17.906	37.67	0.80	36.87	69.50	-31.83	100	0	QP




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

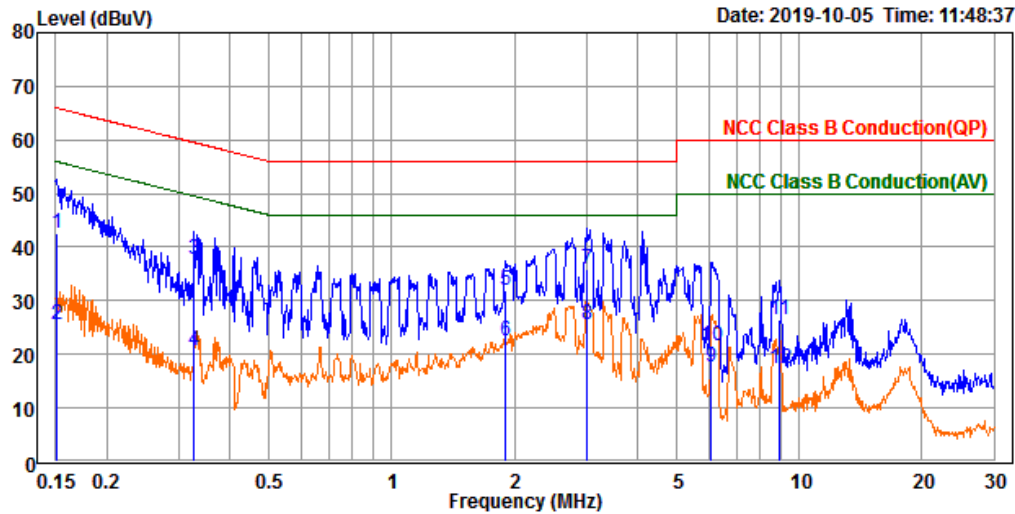

Trace: 1

Site : Conduction room
Condition : NCC Class B Conduction(QP) line1
Test Engineer: Amy Hsu
Product : 自行車訓練台
Model No. : T8000
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.1°C / 35%
Mode : ANT+ TX 2403

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.151	32.98	9.61	42.59	65.96	-23.37	QP
2	0.151	15.92	9.61	25.53	55.96	-30.43	Average
3	0.328	28.16	9.61	37.77	59.50	-21.73	QP
4	0.328	11.13	9.61	20.74	49.50	-28.76	Average
5	1.906	22.41	9.64	32.05	56.00	-23.95	QP
6	1.906	12.72	9.64	22.36	46.00	-23.64	Average
7	3.014	26.19	9.65	35.84	56.00	-20.16	QP
8	3.014	15.75	9.65	25.40	46.00	-20.60	Average
9	6.087	8.08	9.69	17.77	60.00	-42.23	QP
10	6.087	11.95	9.69	21.64	50.00	-28.36	Average
11	8.935	16.64	9.72	26.36	60.00	-33.64	QP
12	8.935	7.57	9.72	17.29	50.00	-32.71	Average

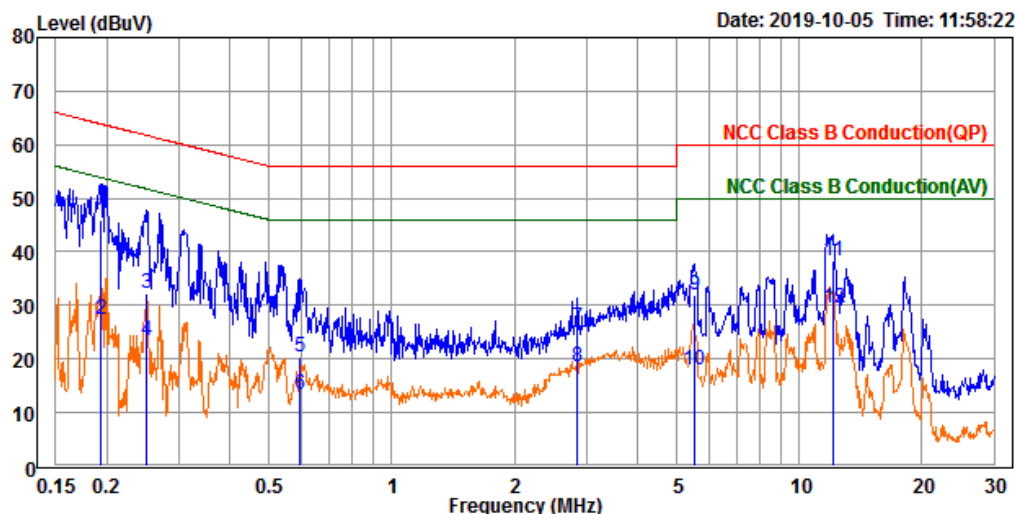

Trace: 1


Site : Conduction room
Condition : NCC Class B Conduction(QP) neutral
Test Engineer: Amy Hsu
Product : 自行車訓練台
Model No. : T8000
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.1°C / 35%
Mode : ANT+ TX 2403

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.193	36.33	9.62	45.95	63.89	-17.94	QP
2	0.193	17.66	9.62	27.28	53.89	-26.61	Average
3	0.251	22.65	9.62	32.27	61.74	-29.47	QP
4	0.251	13.73	9.62	23.35	51.74	-28.39	Average
5	0.594	10.61	9.63	20.24	56.00	-35.76	QP
6	0.594	3.86	9.63	13.49	46.00	-32.51	Average
7	2.854	16.28	9.66	25.94	56.00	-30.06	QP
8	2.854	9.02	9.66	18.68	46.00	-27.32	Average
9	5.510	22.20	9.70	31.90	60.00	-28.10	QP
10	5.510	8.17	9.70	17.87	50.00	-32.13	Average
11	12.110	28.69	9.77	38.46	60.00	-21.54	QP
12	12.110	19.61	9.77	29.38	50.00	-20.62	Average

Spurious Emissions, Band Edges, 2.35-2.5G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

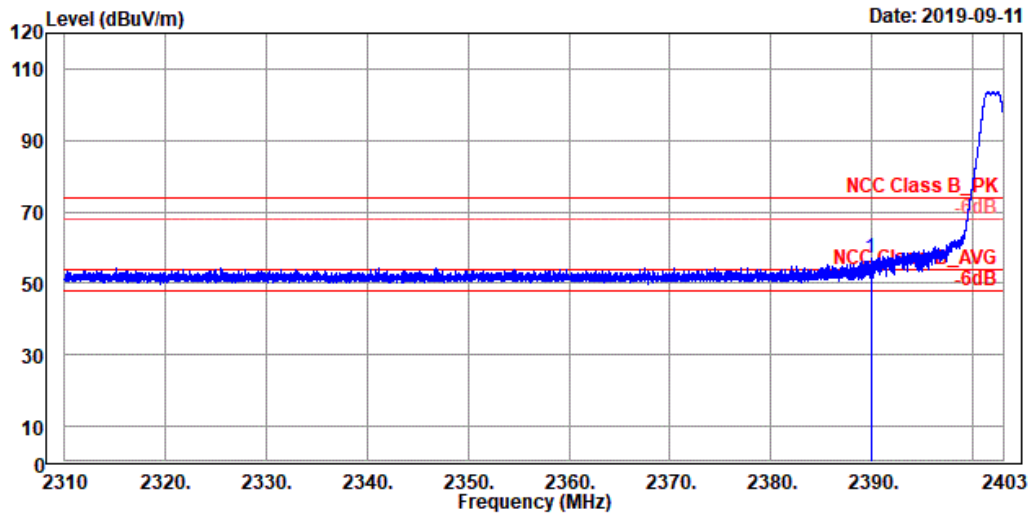


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2389.906	56.96	19.66	37.30	74.00	-17.04	151	35	Peak

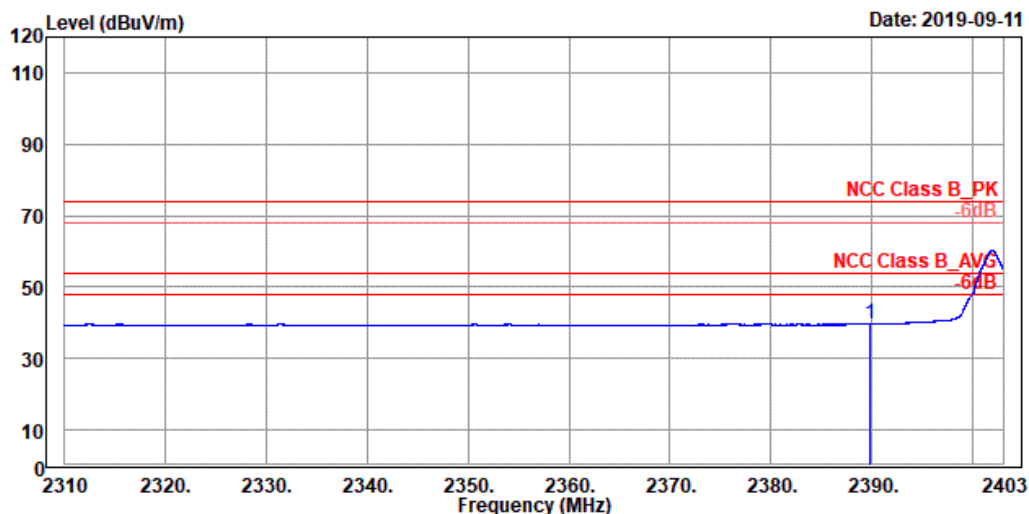


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2389.822	39.65	2.35	37.30	54.00	-14.35	151	35	Average

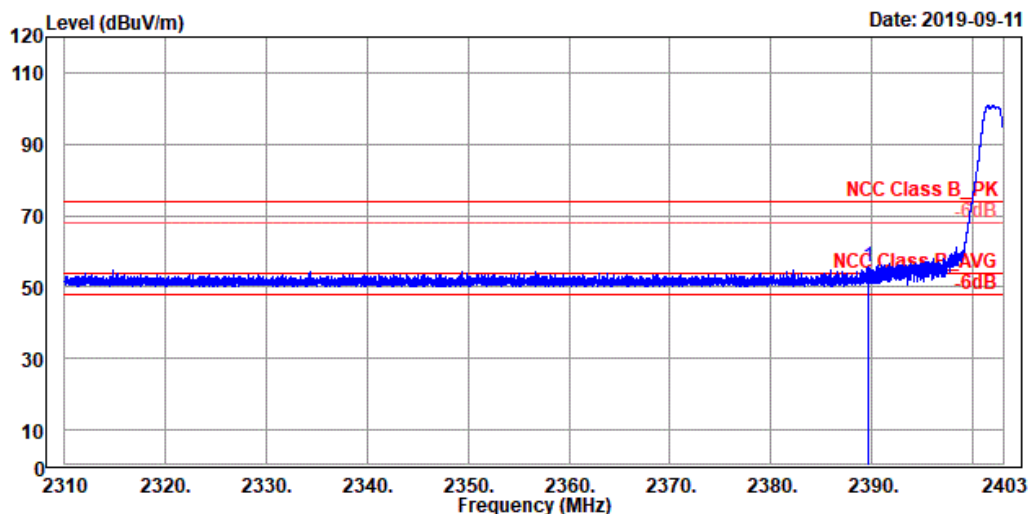


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2389.600	55.52	18.22	37.30	74.00	-18.48	100	303	Peak

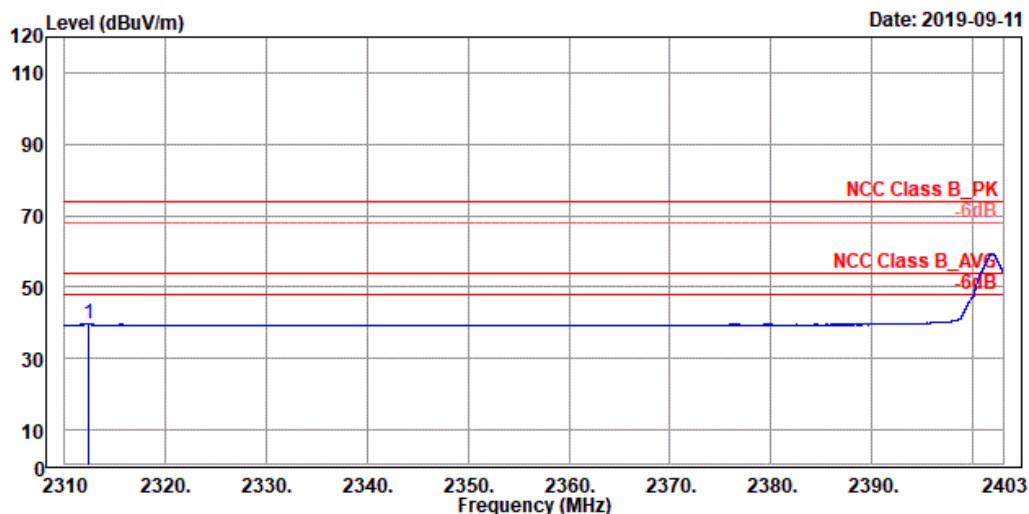


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2312.403	39.59	2.61	36.98	54.00	-14.41	100	303	Average

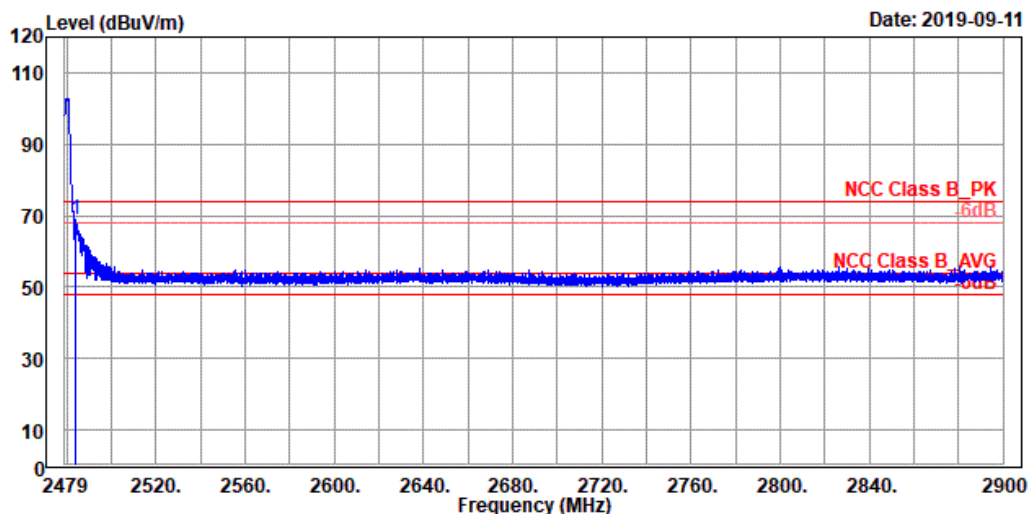


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	2483.500	68.98	31.41	37.57	74.00	-5.02	154	339	Peak

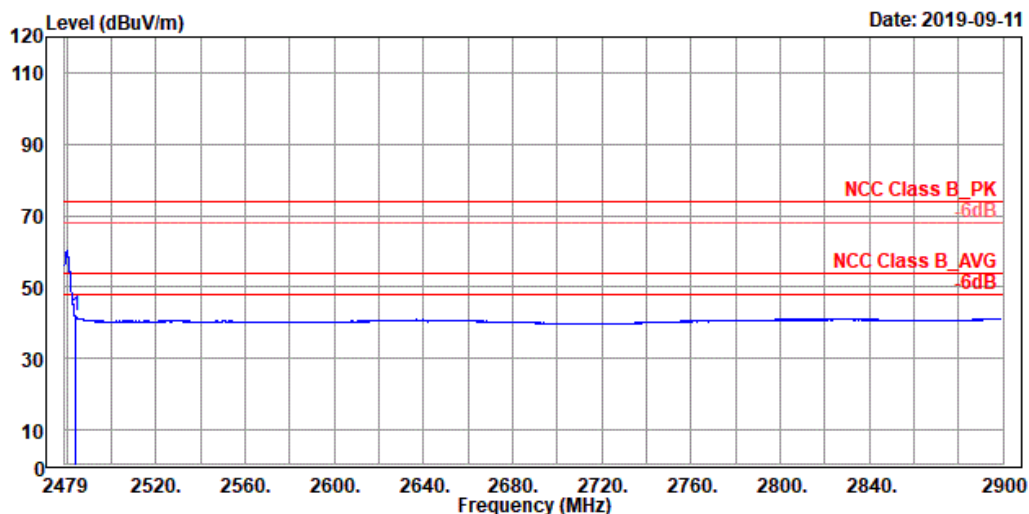


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.500	41.96	4.39	37.57	54.00	-12.04	154	339	Average

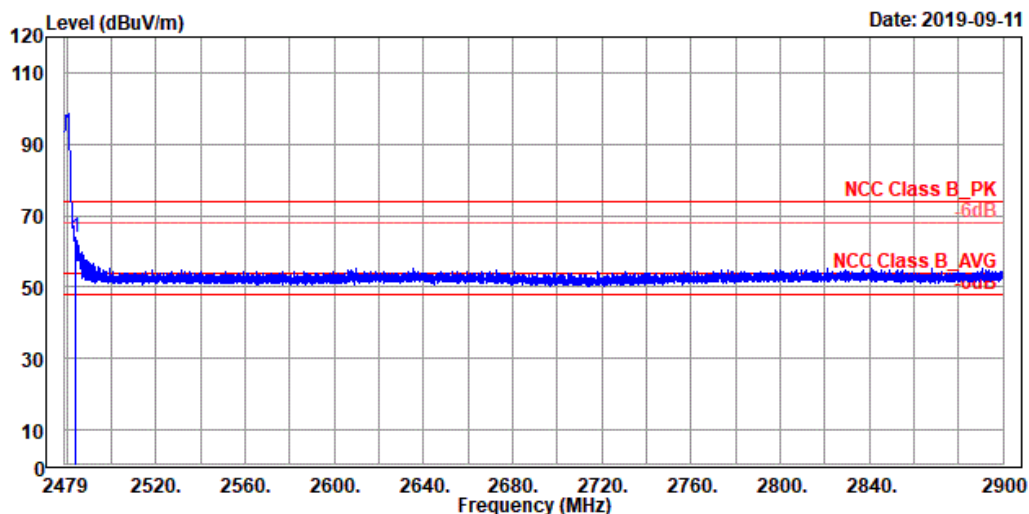

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.701	64.07	26.50	37.57	74.00	-9.93	100	353	Peak

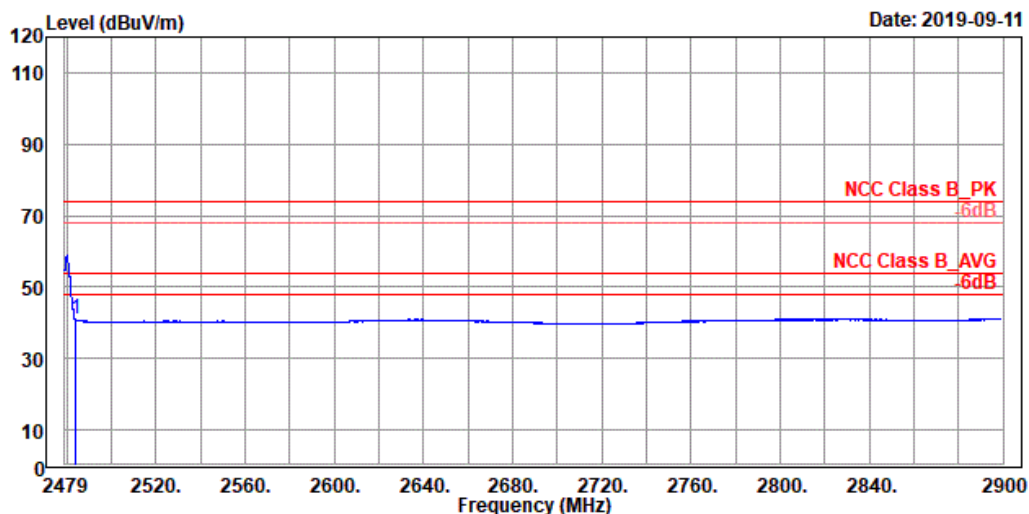


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.500	41.02	3.45	37.57	54.00	-12.98	100	353	Average

Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

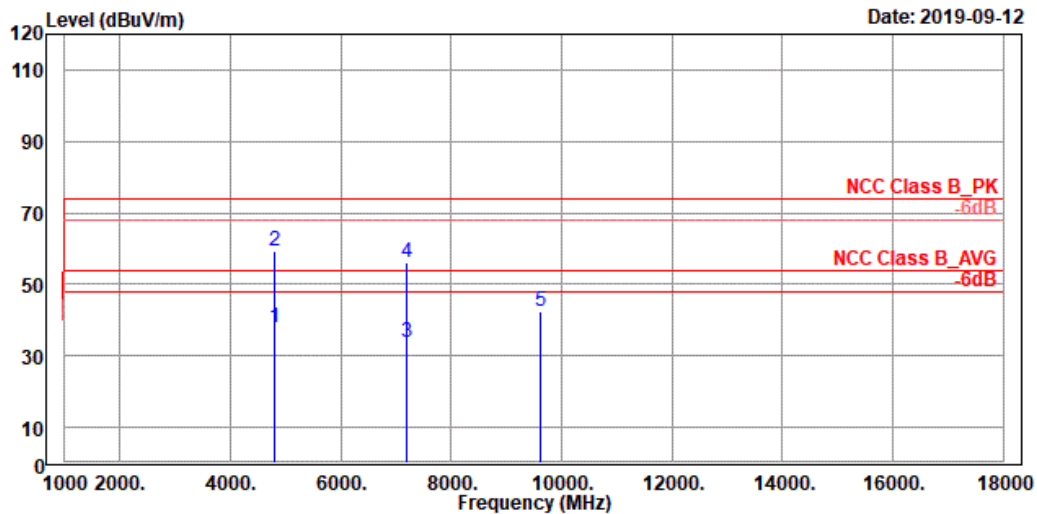


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4804.000	37.84	47.30	-9.46	54.00	-16.16	157	360	Average
2	4804.000	59.21	68.67	-9.46	74.00	-14.79	157	360	Peak
3	7206.000	33.86	40.69	-6.83	54.00	-20.14	346	360	Average
4	7206.000	55.93	62.76	-6.83	74.00	-18.07	346	360	Peak
5	9608.000	42.32	46.46	-4.14	74.00	-31.68	300	206	Peak

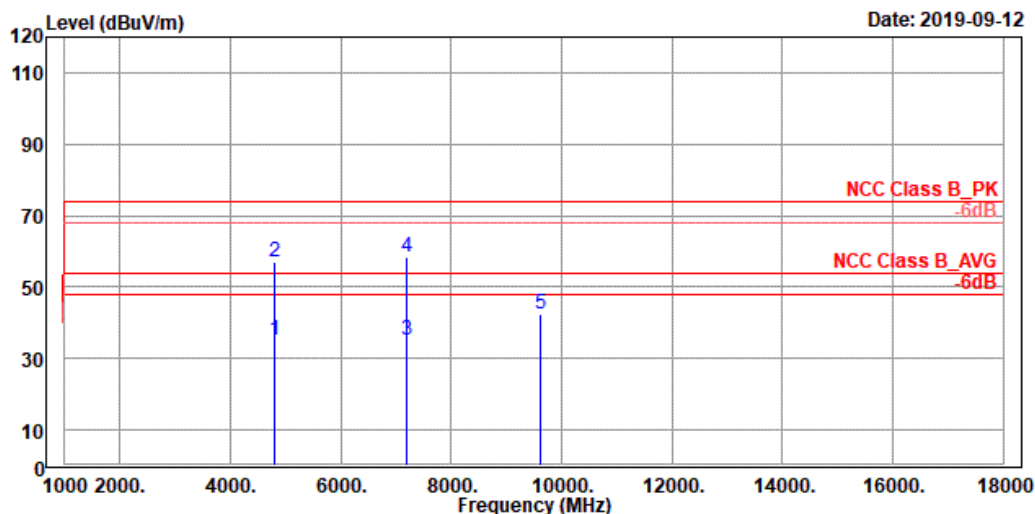


Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4804.000	34.97	44.43	-9.46	54.00	-19.03	200	305	Average
2	4804.000	56.96	66.42	-9.46	74.00	-17.04	200	305	Peak
3	7206.000	35.18	42.01	-6.83	54.00	-18.82	207	0	Average
4	7206.000	58.28	65.11	-6.83	74.00	-15.72	207	0	Peak
5	9608.000	42.38	46.52	-4.14	74.00	-31.62	252	0	Peak

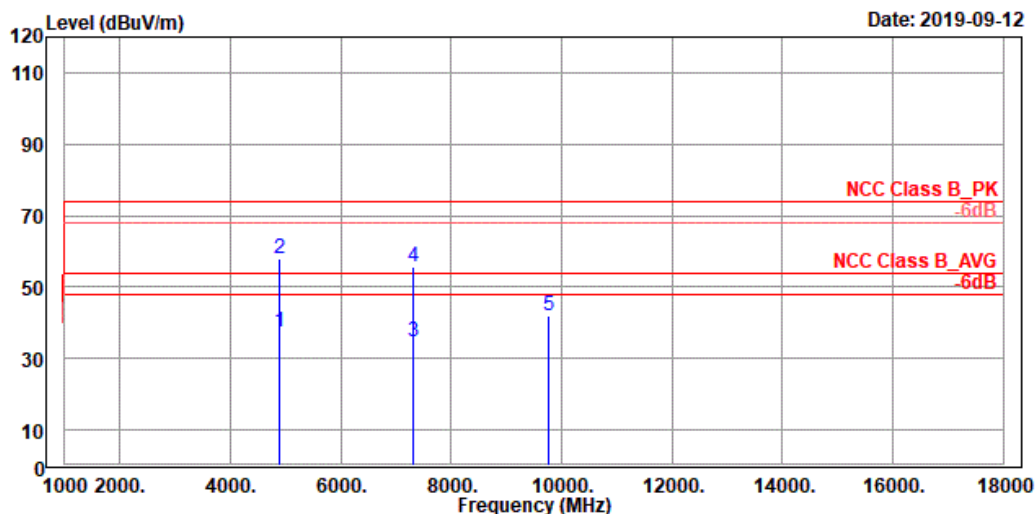


Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4880.000	37.20	46.71	-9.51	54.00	-16.80	300	340	Average
2	4880.000	57.92	67.43	-9.51	74.00	-16.08	300	340	Peak
3	7320.000	34.63	41.43	-6.80	54.00	-19.37	129	360	Average
4	7320.000	55.45	62.25	-6.80	74.00	-18.55	129	360	Peak
5	9760.000	42.19	46.06	-3.87	74.00	-31.81	100	137	Peak

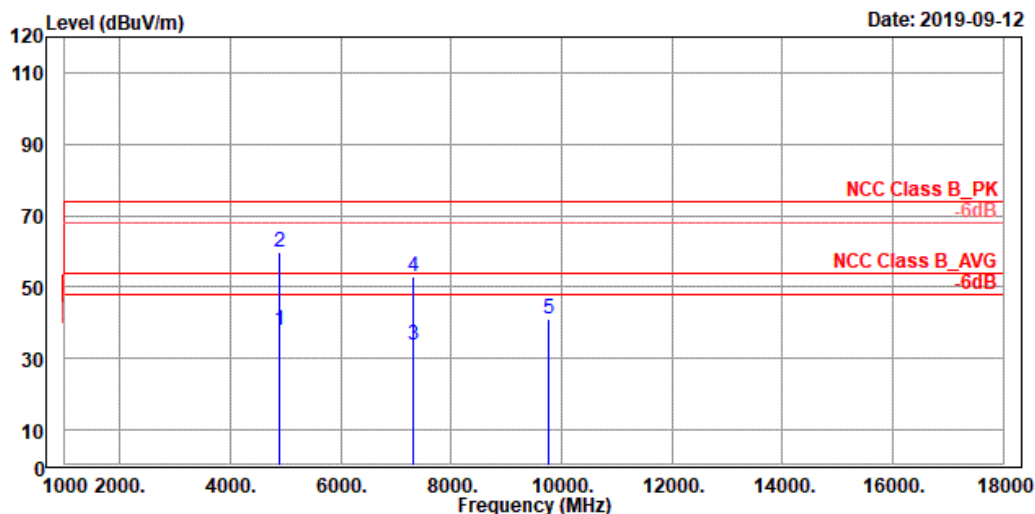


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4880.000	37.91	47.42	-9.51	54.00	-16.09	101	360	Average
2	4880.000	59.77	69.28	-9.51	74.00	-14.23	101	360	Peak
3	7320.000	33.61	40.41	-6.80	54.00	-20.39	300	276	Average
4	7320.000	52.95	59.75	-6.80	74.00	-21.05	300	276	Peak
5	9760.000	41.29	45.16	-3.87	74.00	-32.71	143	360	Peak

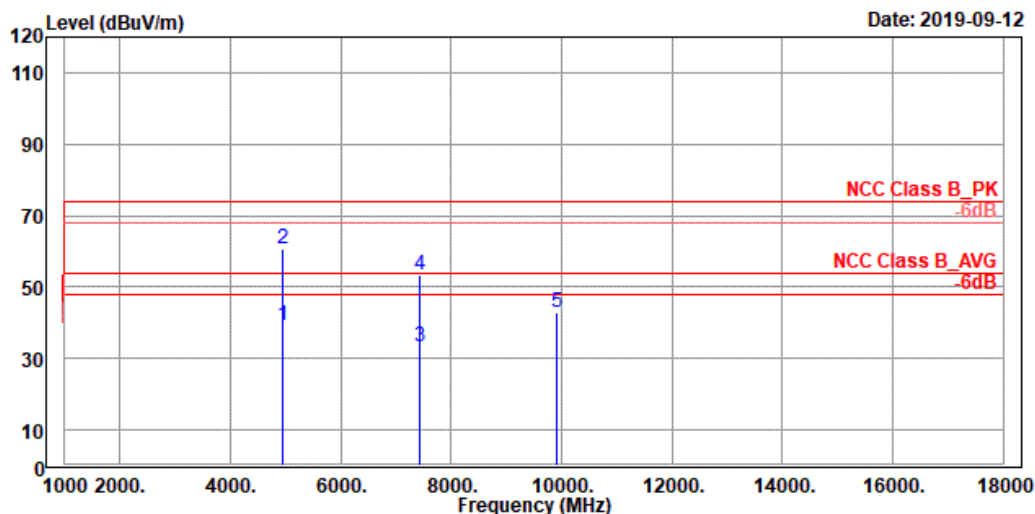

Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4960.000	39.06	48.51	-9.45	54.00	-14.94	123	360	Average
2	4960.000	60.59	70.04	-9.45	74.00	-13.41	123	360	Peak
3	7440.000	33.53	40.23	-6.70	54.00	-20.47	100	228	Average
4	7440.000	53.46	60.16	-6.70	74.00	-20.54	100	228	Peak
5	9920.000	42.81	46.39	-3.58	74.00	-31.19	300	293	Peak

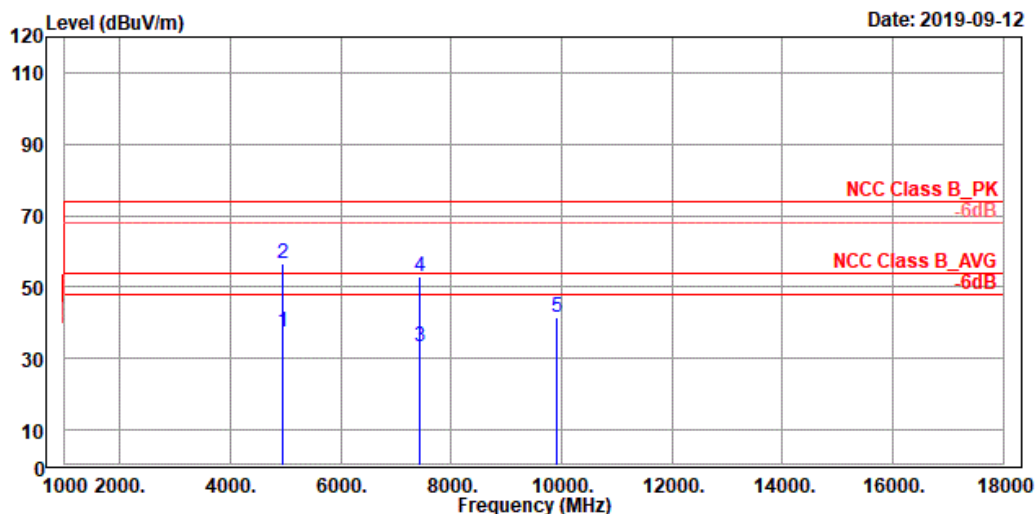


Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4960.000	37.40	46.85	-9.45	54.00	-16.60	300	339	Average
2	4960.000	56.42	65.87	-9.45	74.00	-17.58	300	339	Peak
3	7440.000	33.50	40.20	-6.70	54.00	-20.50	200	82	Average
4	7440.000	53.01	59.71	-6.70	74.00	-20.99	200	82	Peak
5	9920.000	41.58	45.16	-3.58	74.00	-32.42	300	58	Peak

Spurious Emissions, TX Mode, 18-26G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

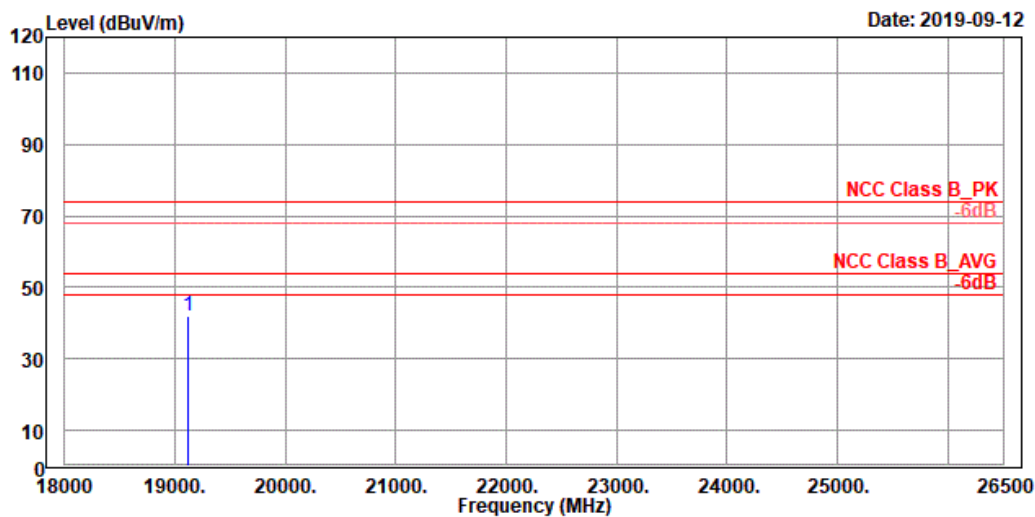


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19117.130	42.08	42.52	-0.44	74.00	-31.92	100	198	Peak

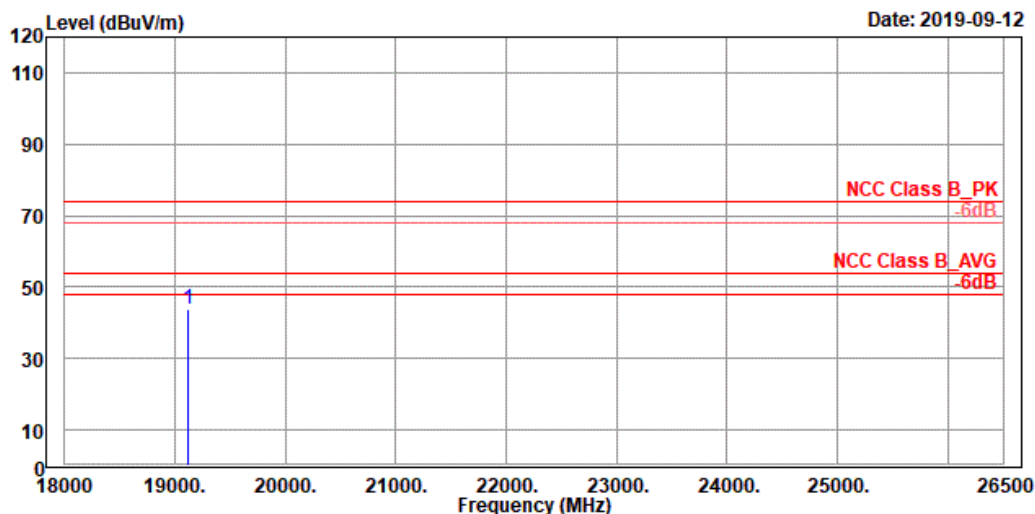


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19117.130	43.59	44.03	-0.44	74.00	-30.41	100	65	Peak

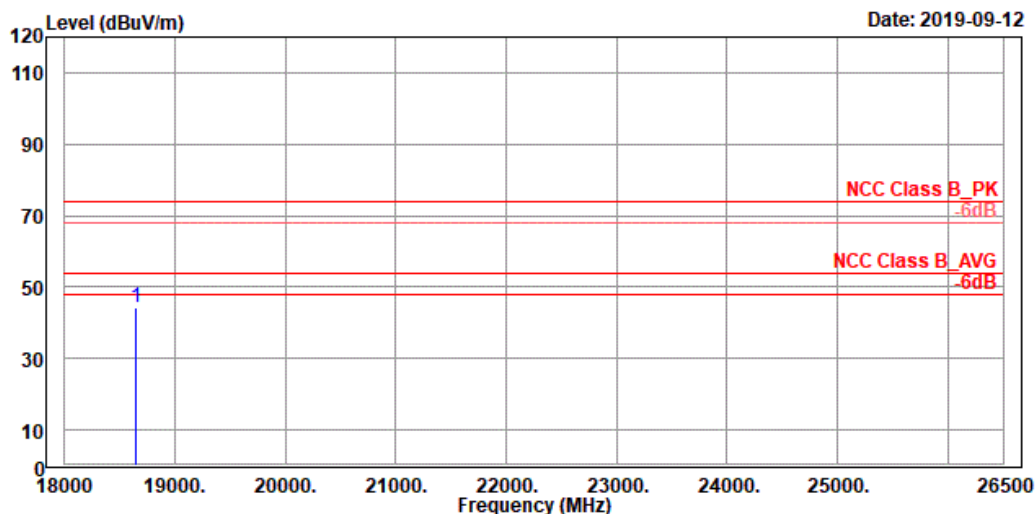


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18638.970	44.33	45.05	-0.72	74.00	-29.67	100	312	Peak

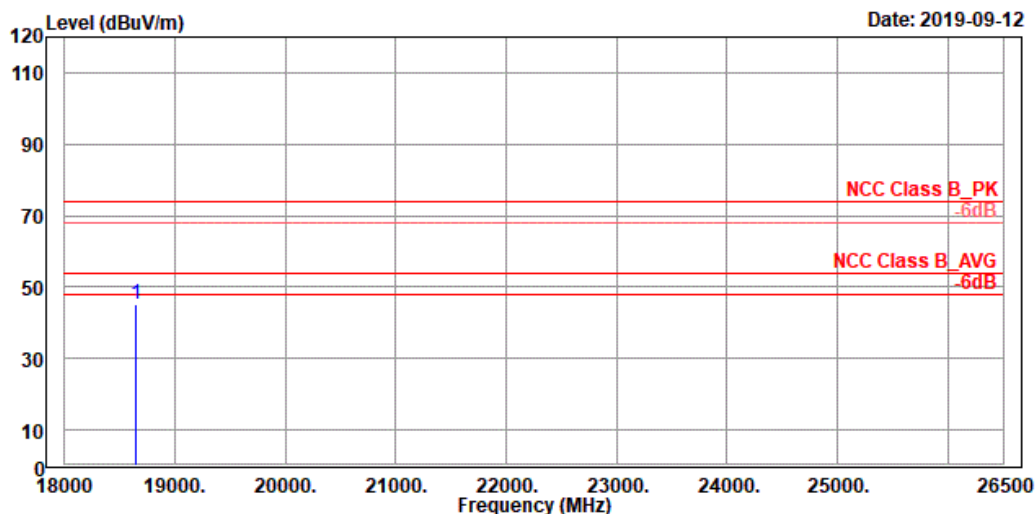


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18648.890	45.38	46.09	-0.71	74.00	-28.62	100	58	Peak

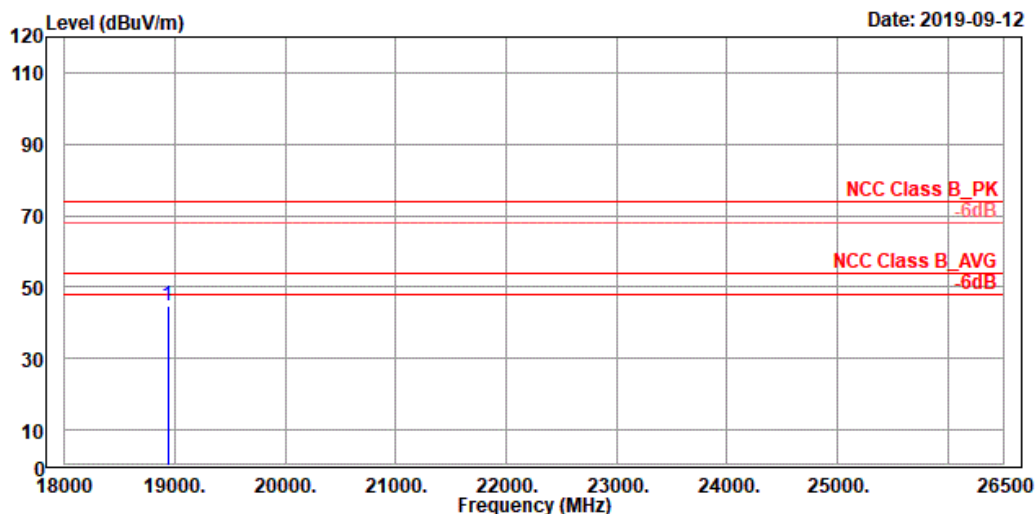

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18931.540	44.76	45.24	-0.48	74.00	-29.24	100	312	Peak

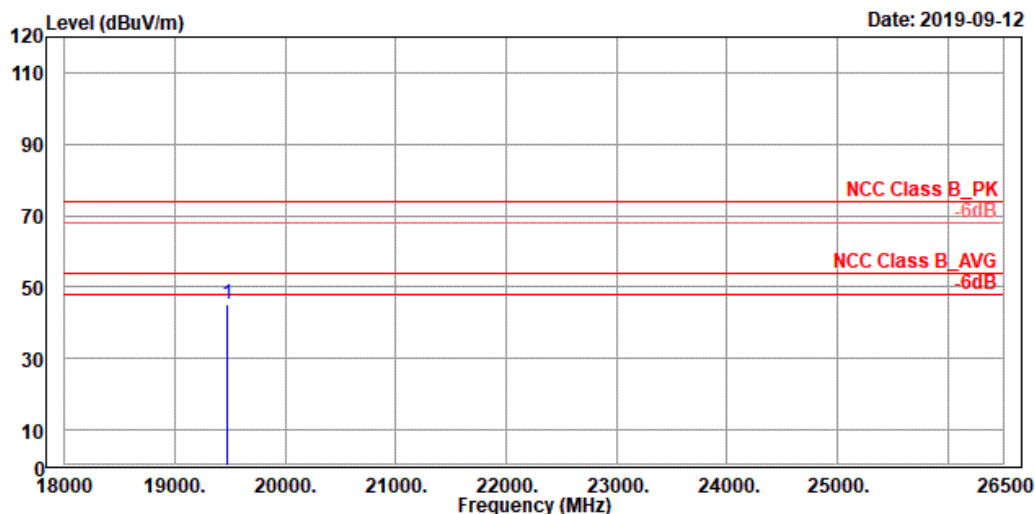


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19464.250	45.02	45.36	-0.34	74.00	-28.98	100	295	Peak

Spurious Emissions, TX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

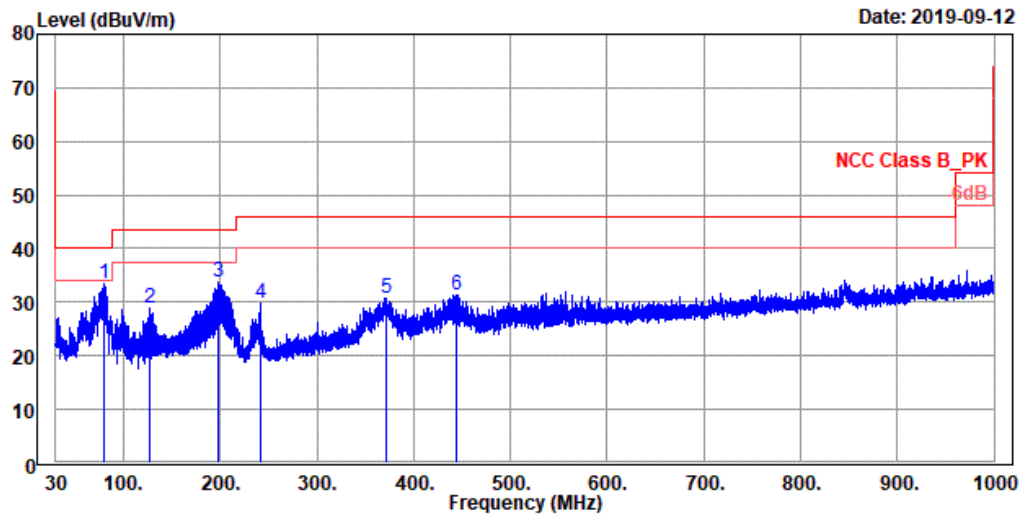

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	80.198	33.46	44.33	-10.87	40.00	-6.54	100	186	QP
2	127.485	28.85	36.94	-8.09	43.50	-14.65	100	140	QP
3	198.295	33.64	42.03	-8.39	43.50	-9.86	100	114	QP
4	240.975	29.79	36.62	-6.83	46.00	-16.21	200	255	QP
5	371.359	30.82	34.47	-3.65	46.00	-15.18	112	360	QP
6	444.756	31.38	33.62	-2.24	46.00	-14.62	100	1	QP

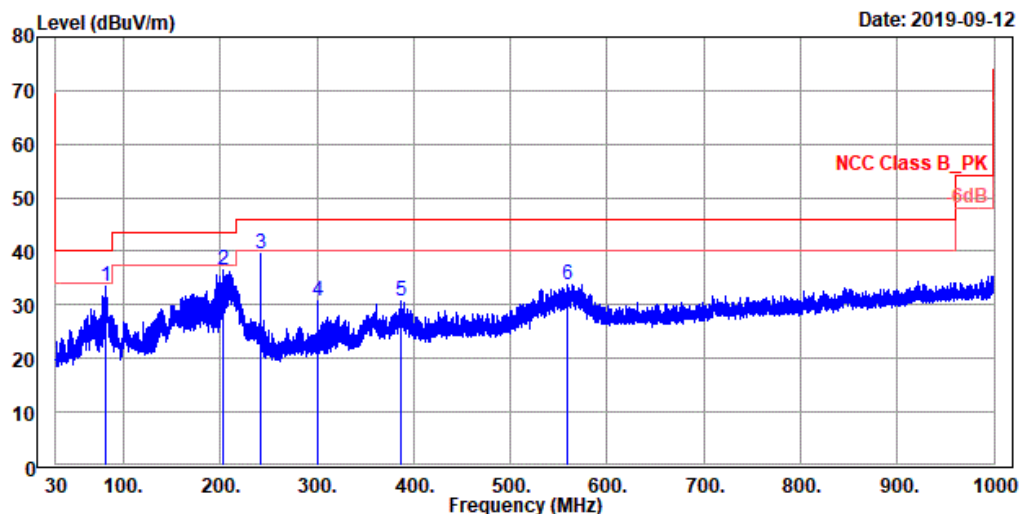


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	81.491	33.40	44.52	-11.12	40.00	-6.60	200	189	QP
2	202.983	36.60	44.96	-8.36	43.50	-6.90	100	219	QP
3	241.056	39.56	46.39	-6.83	46.00	-6.44	100	35	QP
4	301.358	30.57	35.41	-4.84	46.00	-15.43	100	46	QP
5	386.313	30.79	34.13	-3.34	46.00	-15.21	209	0	QP
6	558.812	33.89	34.69	-0.80	46.00	-12.11	100	1	QP

Spurious Emissions, TX Mode, 9k-30M




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

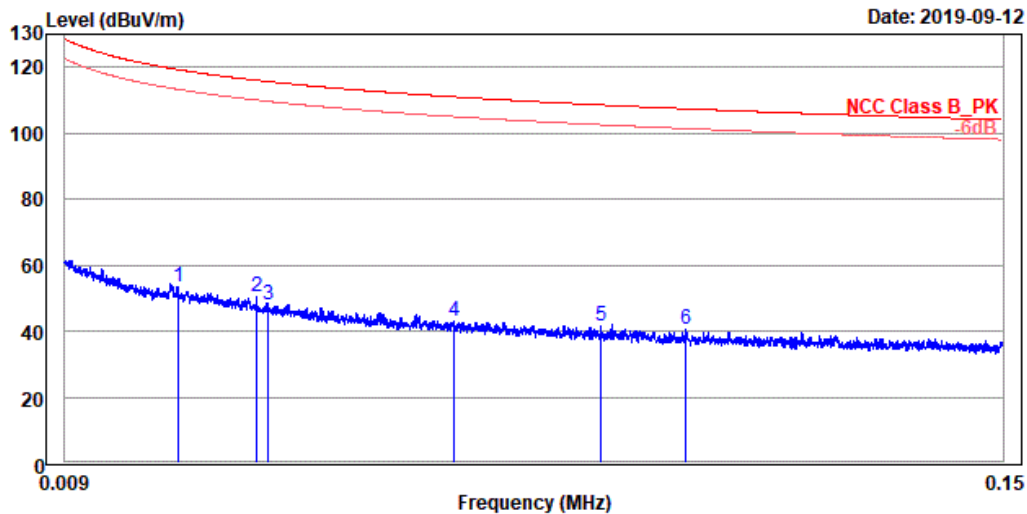

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.026	53.36	-18.11	71.47	119.31	-65.95	100	221	QP
2	0.038	50.37	-17.89	68.26	116.05	-65.68	100	312	QP
3	0.039	48.04	-19.69	67.73	115.67	-67.63	100	225	QP
4	0.067	42.98	-19.71	62.69	111.02	-68.04	100	198	QP
5	0.090	41.42	-19.07	60.49	108.56	-67.14	100	174	QP
6	0.102	40.40	-18.71	59.11	107.39	-66.99	100	175	QP

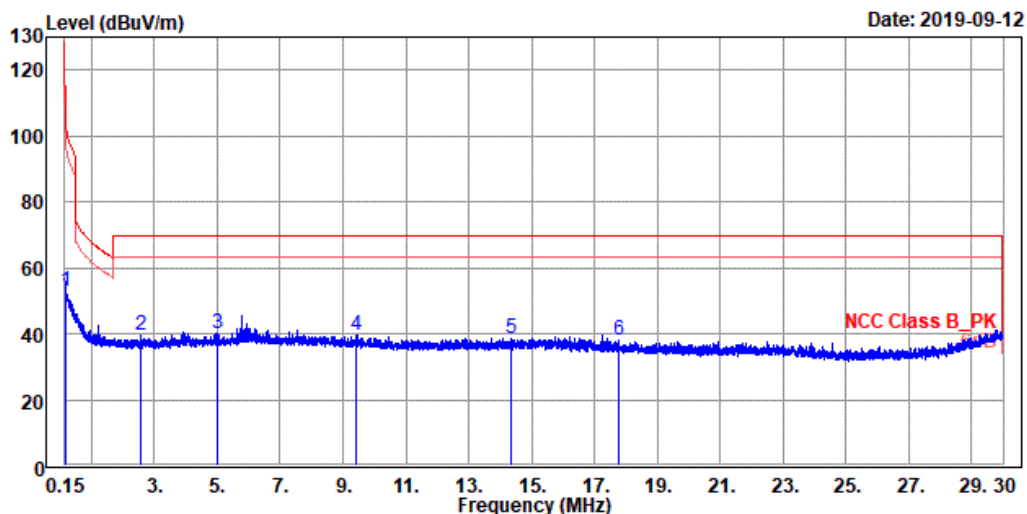


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.192	52.95	-0.95	53.90	101.92	-48.97	100	258	QP
2	2.583	39.67	1.25	38.42	69.50	-29.83	100	184	QP
3	4.986	40.14	1.79	38.35	69.50	-29.36	100	23	QP
4	9.433	39.73	2.03	37.70	69.50	-29.77	100	44	QP
5	14.371	38.51	0.85	37.66	69.50	-30.99	100	265	QP
6	17.776	38.00	1.09	36.91	69.50	-31.50	100	102	QP

Spurious Emissions, RX Mode, 1-18G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

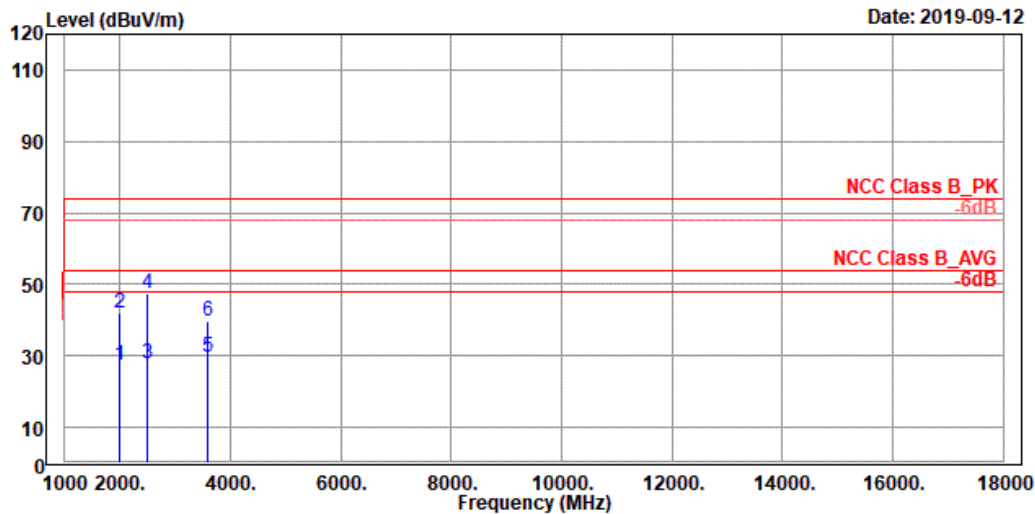

Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBUV/m	dBuV	dB/m	dBUV/m	dB	cm	deg	
1	1991.749	27.23	42.34	-15.11	54.00	-26.77	100	162	Average
2	1991.749	42.04	57.15	-15.11	74.00	-31.96	100	162	Peak
3	2490.458	28.04	41.56	-13.52	54.00	-25.96	200	190	Average
4	2490.458	47.37	60.89	-13.52	74.00	-26.63	200	190	Peak
5	3592.716	29.84	41.22	-11.38	54.00	-24.16	200	44	Average
6	3592.716	39.68	51.06	-11.38	74.00	-34.32	200	44	Peak

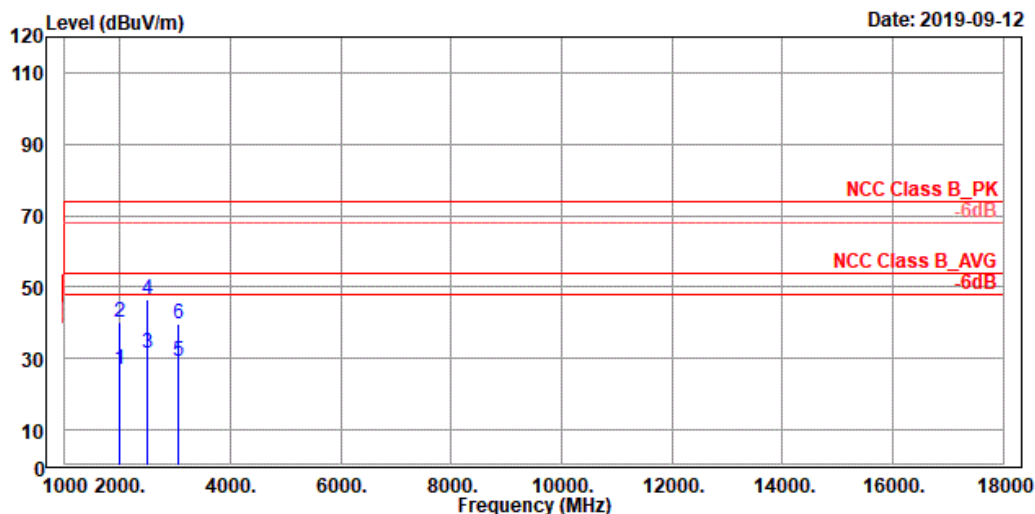


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	1991.749	27.05	42.16	-15.11	54.00	-26.95	100	152	Average
2	1991.749	39.93	55.04	-15.11	74.00	-34.07	100	152	Peak
3	2490.458	31.64	45.16	-13.52	54.00	-22.36	200	196	Average
4	2490.458	46.42	59.94	-13.52	74.00	-27.58	200	196	Peak
5	3068.506	29.26	41.09	-11.83	54.00	-24.74	200	156	Average
6	3068.506	39.69	51.52	-11.83	74.00	-34.31	200	156	Peak

Spurious Emissions, RX Mode, 18-26G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

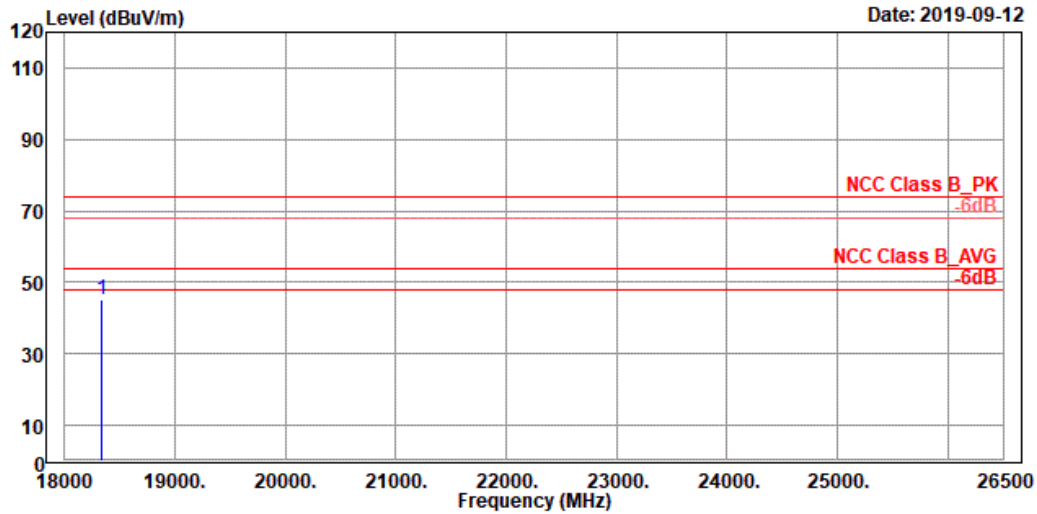

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18334.360	45.08	46.21	-1.13	74.00	-28.92	100	35	Peak

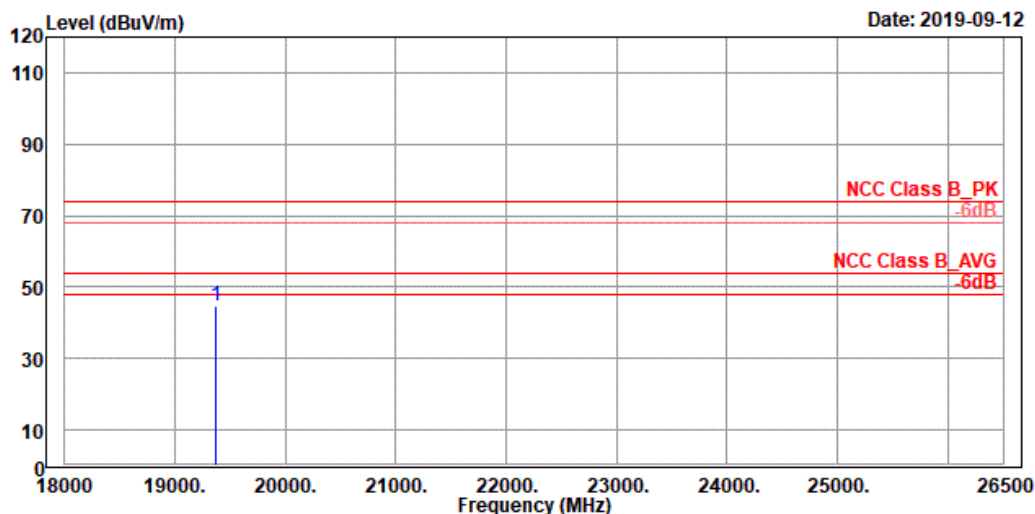


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19365.780	44.56	44.96	-0.40	74.00	-29.44	100	52	Peak

Spurious Emissions, RX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

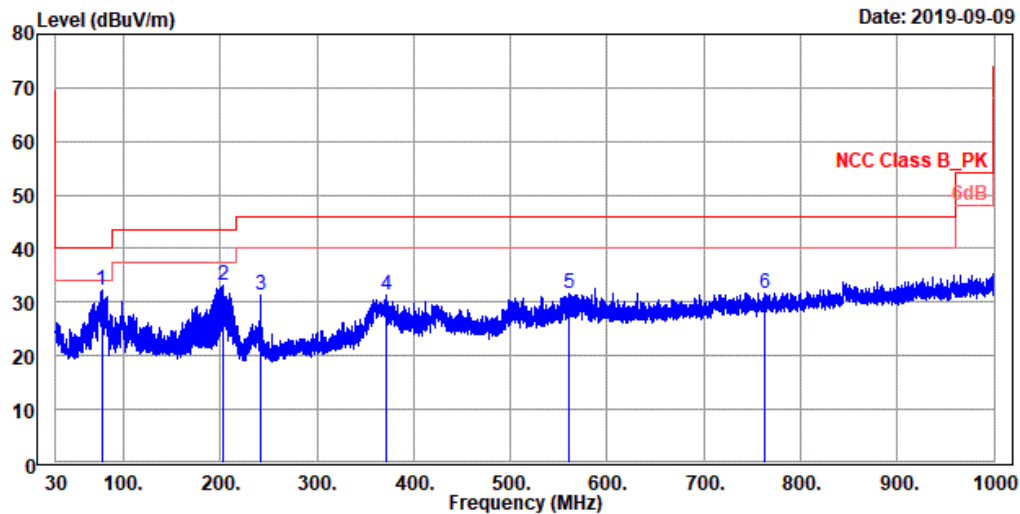

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	77.288	32.17	42.46	-10.29	40.00	-7.83	100	151	QP
2	202.256	33.23	41.61	-8.38	43.50	-10.27	100	99	QP
3	241.137	31.23	38.06	-6.83	46.00	-14.77	100	312	QP
4	371.440	31.47	35.12	-3.65	46.00	-14.53	184	360	QP
5	560.348	31.61	32.38	-0.77	46.00	-14.39	218	0	QP
6	763.643	31.75	29.32	2.43	46.00	-14.25	300	111	QP

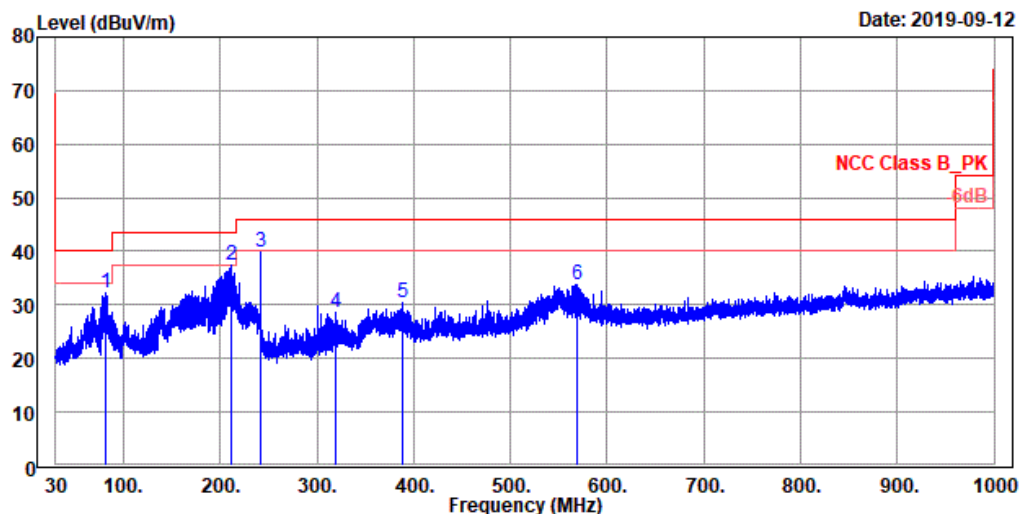


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	81.087	32.37	43.42	-11.05	40.00	-7.63	196	360	QP
2	210.743	37.31	45.63	-8.32	43.50	-6.19	100	210	QP
3	241.137	39.98	46.81	-6.83	46.00	-6.02	100	24	QP
4	320.111	28.70	33.04	-4.34	46.00	-17.30	100	194	QP
5	389.143	30.35	33.66	-3.31	46.00	-15.65	209	0	QP
6	569.482	33.83	34.40	-0.57	46.00	-12.17	100	7	QP

Spurious Emissions, RX Mode, 9K-30M




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

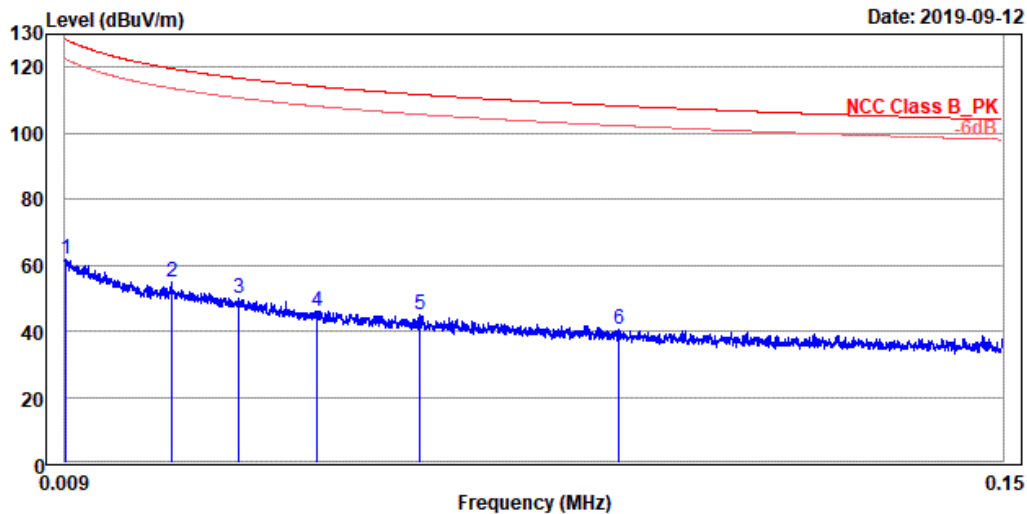

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.009	61.64	-18.07	79.71	128.30	-66.66	100	132	QP
2	0.025	55.08	-16.56	71.64	119.63	-64.55	100	225	QP
3	0.035	50.17	-18.96	69.13	116.70	-66.53	100	184	QP
4	0.047	46.10	-19.74	65.84	114.18	-68.08	100	331	QP
5	0.062	44.99	-18.37	63.36	111.71	-66.72	100	252	QP
6	0.092	40.41	-19.76	60.17	108.29	-67.88	100	114	QP

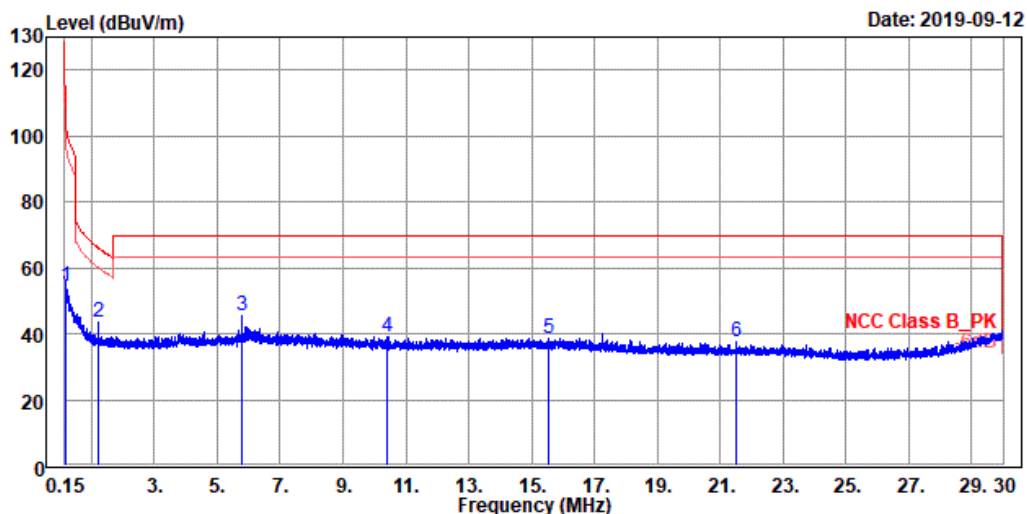


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.197	54.16	0.55	53.61	101.70	-47.54	100	122	QP
2	1.225	43.49	3.80	39.69	65.84	-22.35	100	285	QP
3	5.797	45.53	7.17	38.36	69.50	-23.97	100	310	QP
4	10.416	39.11	1.69	37.42	69.50	-30.39	100	25	QP
5	15.540	38.77	1.15	37.62	69.50	-30.73	100	197	QP
6	21.523	37.44	1.47	35.97	69.50	-32.06	100	78	QP




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

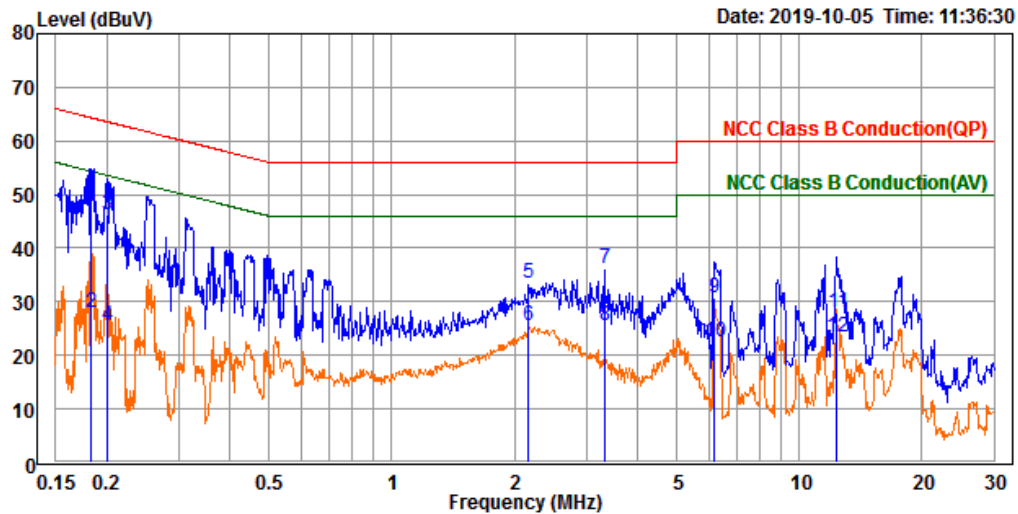

Trace: 1

Site : Conduction room
Condition : NCC Class B Conduction(QP) line1
Test Engineer: Amy Hsu
Product : 自行車訓練台
Model No. : T8000
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.1°C / 35%
Mode : BLE TX 2402

	Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.182	38.23	9.61	47.84	64.39	-16.55	QP
2	0.182	18.46	9.61	28.07	54.39	-26.32	Average
3	0.200	36.68	9.61	46.29	63.60	-17.31	QP
4	0.200	15.98	9.61	25.59	53.60	-28.01	Average
5	2.169	23.67	9.64	33.31	56.00	-22.69	QP
6	2.169	15.82	9.64	25.46	46.00	-20.54	Average
7	3.330	26.51	9.65	36.16	56.00	-19.84	QP
8	3.330	15.84	9.65	25.49	46.00	-20.51	Average
9	6.179	21.09	9.69	30.78	60.00	-29.22	QP
10	6.179	12.74	9.69	22.43	50.00	-27.57	Average
11	12.354	18.37	9.75	28.12	60.00	-31.88	QP
12	12.354	13.67	9.75	23.42	50.00	-26.58	Average

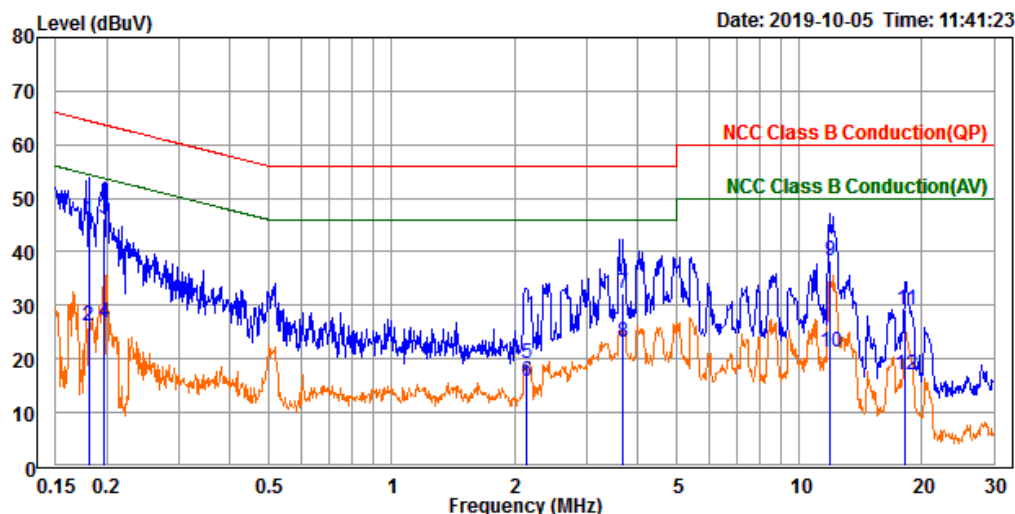


Trace: 1

Site : Conduction room
Condition : NCC Class B Conduction(QP) neutral
Test Engineer: Amy Hsu
Product : 自行車訓練台
Model No. : T8000
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.1°C / 35%
Mode : BLE TX 2402

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.180	36.31	9.62	45.93	64.47	-18.54	QP
2	0.180	16.53	9.62	26.15	54.47	-28.32	Average
3	0.197	36.63	9.62	46.25	63.72	-17.47	QP
4	0.197	17.17	9.62	26.79	53.72	-26.93	Average
5	2.148	9.53	9.65	19.18	56.00	-36.82	QP
6	2.148	6.10	9.65	15.75	46.00	-30.25	Average
7	3.698	22.71	9.68	32.39	56.00	-23.61	QP
8	3.698	13.57	9.68	23.25	46.00	-22.75	Average
9	11.871	28.55	9.76	38.31	60.00	-21.69	QP
10	11.871	11.56	9.76	21.32	50.00	-28.68	Average
11	18.225	19.32	9.81	29.13	60.00	-30.87	QP
12	18.225	7.18	9.81	16.99	50.00	-33.01	Average


Spurious Emissions, Band Edges, 2.35-2.5G

TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

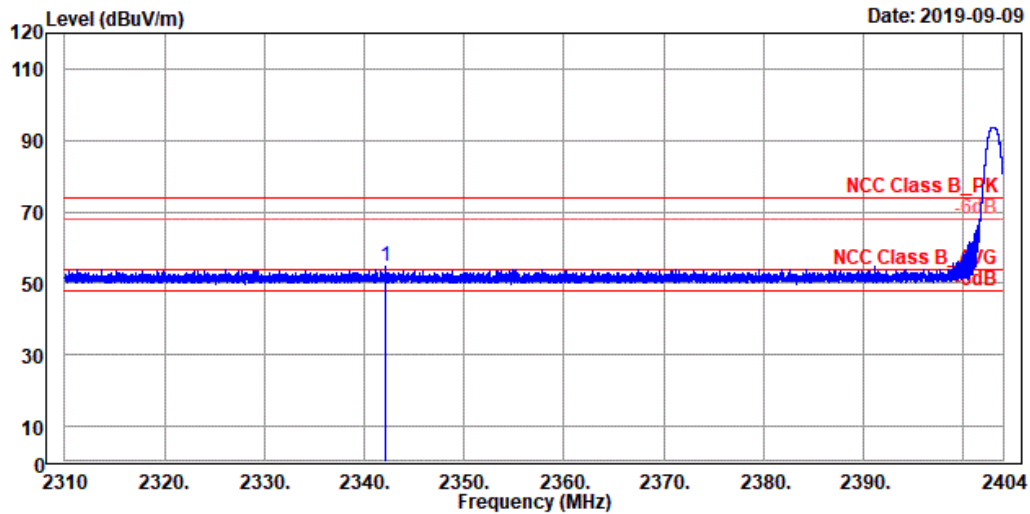


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2342.143	54.55	17.42	37.13	74.00	-19.45	139	175	Peak

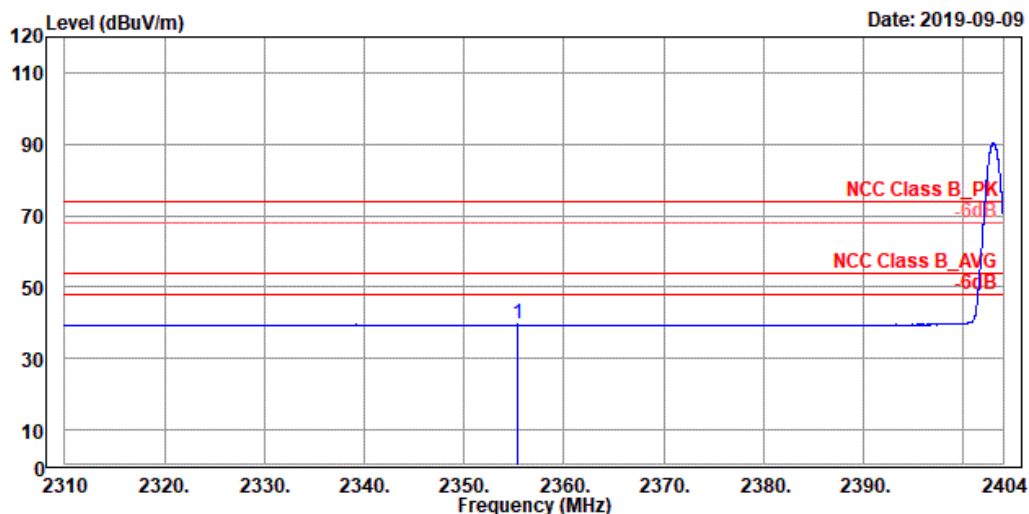


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2355.312	39.51	2.32	37.19	54.00	-14.49	139	175	Average

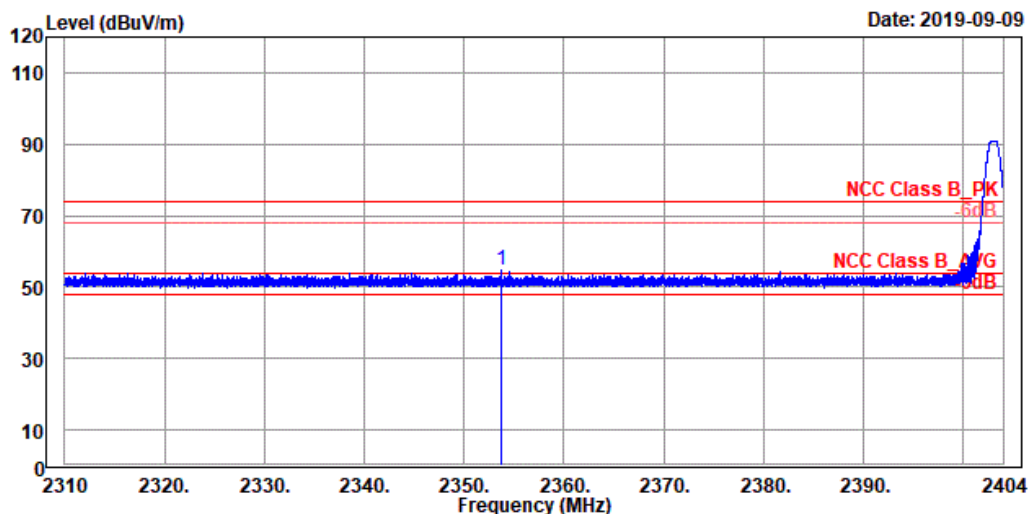


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2353.675	54.60	17.41	37.19	74.00	-19.40	100	205	Peak

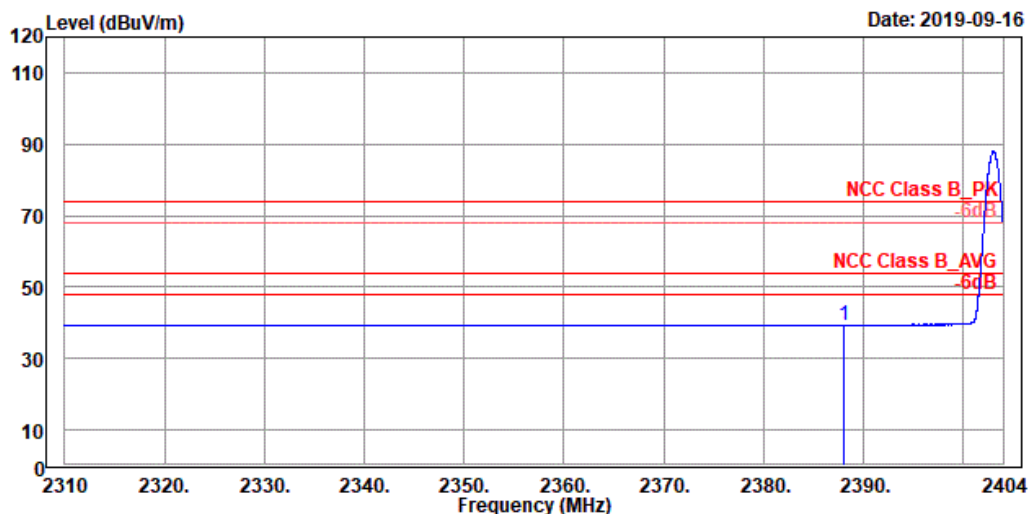


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2388.121	39.43	2.13	37.30	54.00	-14.57	100	205	Average

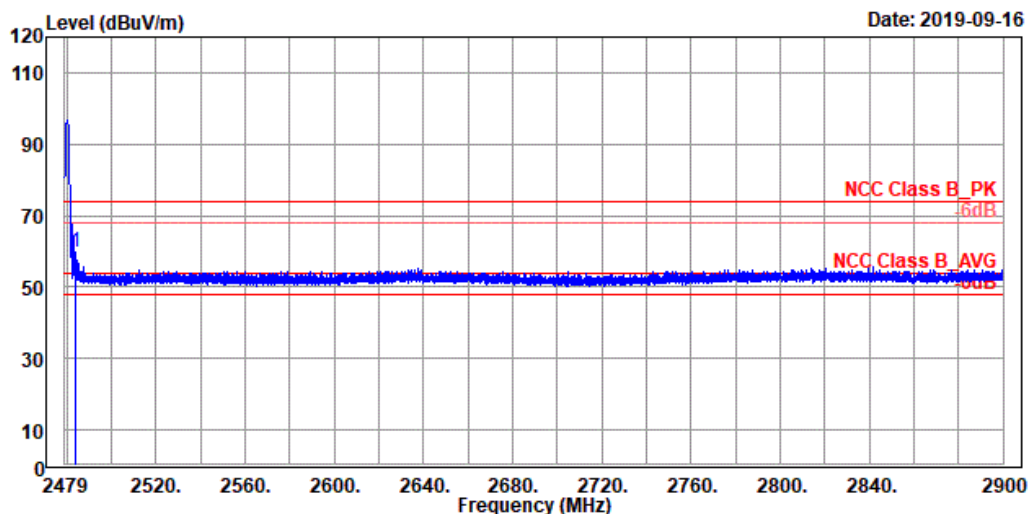


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 3

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.500	59.93	22.36	37.57	74.00	-14.07	138	191	Peak

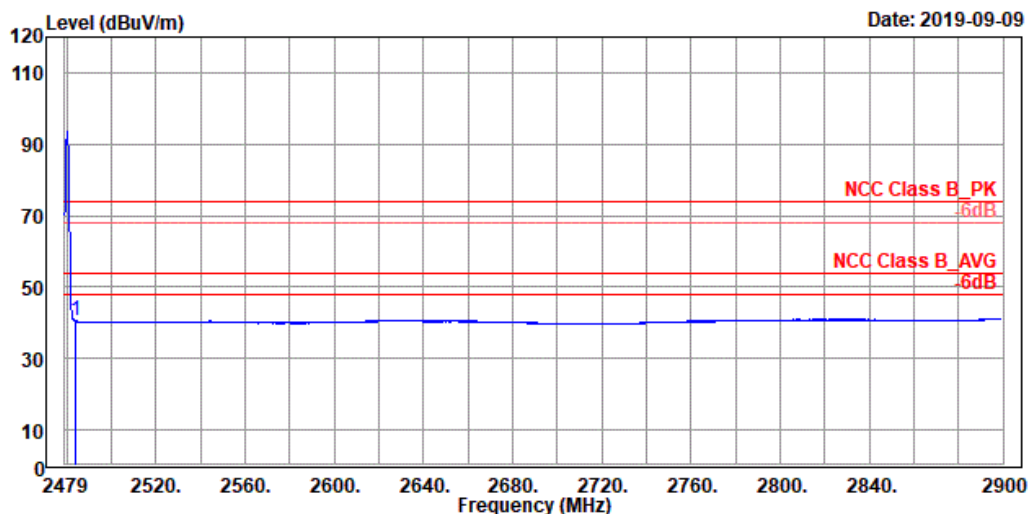


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 3

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.596	40.61	3.04	37.57	54.00	-13.39	138	191	Average

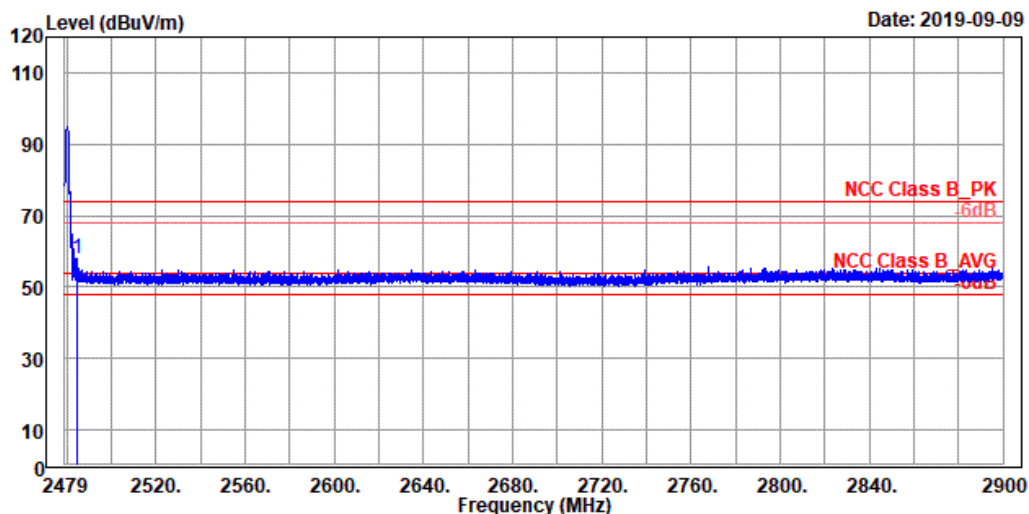

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 3

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2484.438	58.09	20.52	37.57	74.00	-15.91	100	183	Peak

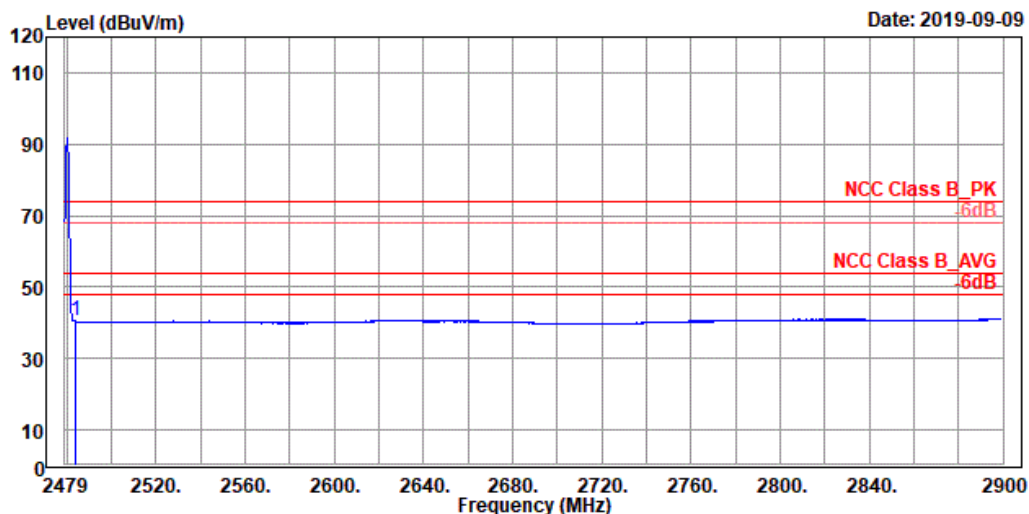


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 3

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.702	40.39	2.82	37.57	54.00	-13.61	100	183	Average

Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

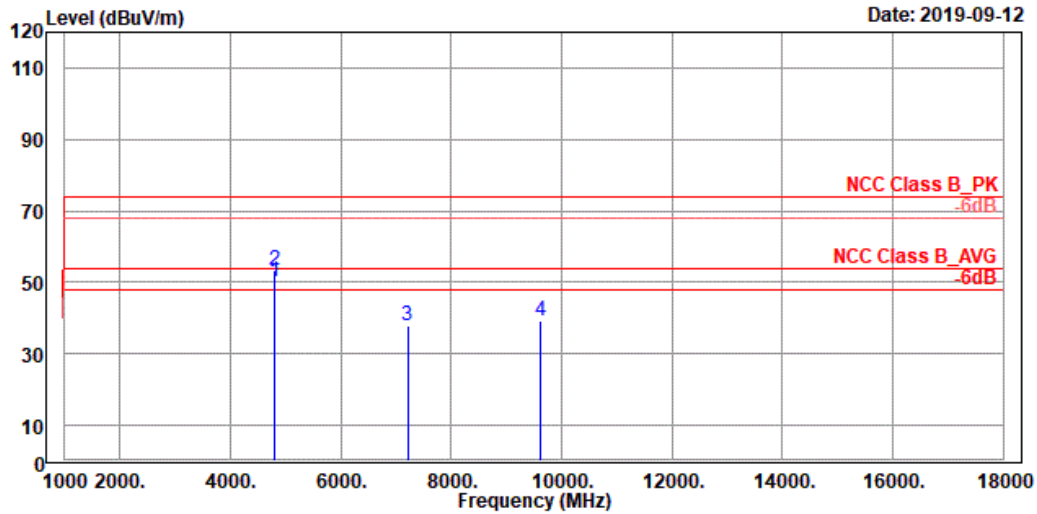


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	4806.000	50.15	60.44	-10.29	54.00	-3.85	100	80	Average
2	4806.000	53.28	63.57	-10.29	74.00	-20.72	100	80	Peak
3	7209.101	37.84	45.75	-7.91	74.00	-36.16	100	80	Peak
4	9611.801	39.43	44.80	-5.37	74.00	-34.57	100	80	Peak

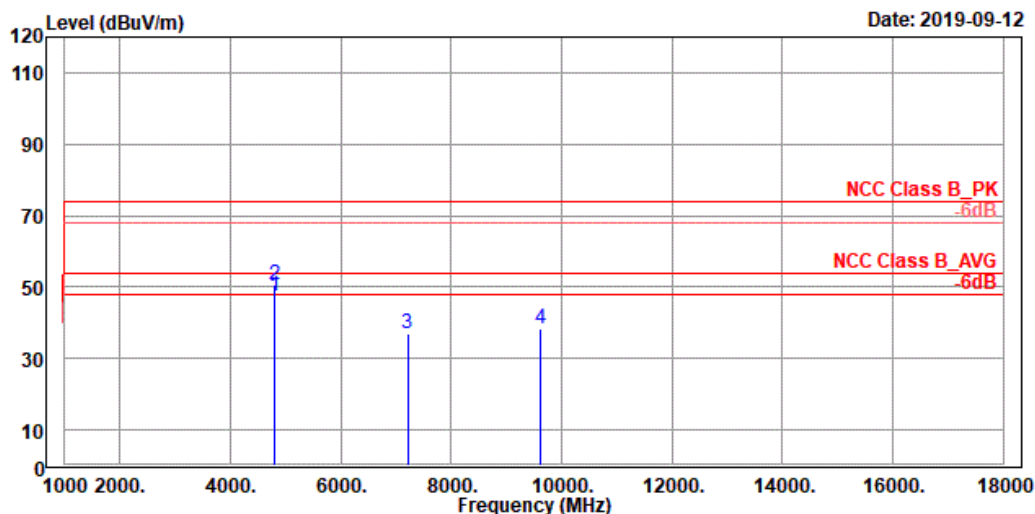


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4806.000	47.28	57.57	-10.29	54.00	-6.72	178	339	Average
2	4806.000	50.56	60.85	-10.29	74.00	-23.44	178	339	Peak
3	7209.101	37.08	44.99	-7.91	74.00	-36.92	178	339	Peak
4	9611.801	38.27	43.64	-5.37	74.00	-35.73	178	339	Peak

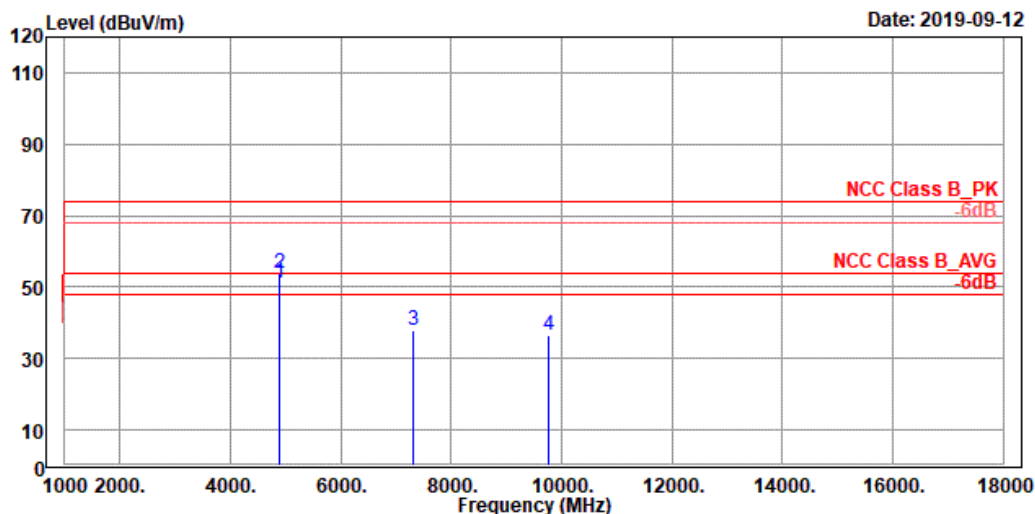


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	4884.000	51.26	61.60	-10.34	54.00	-2.74	100	80	Average
2	4884.000	54.04	64.38	-10.34	74.00	-19.96	100	80	Peak
3	7326.610	37.97	45.86	-7.89	74.00	-36.03	100	80	Peak
4	9768.064	36.33	41.44	-5.11	74.00	-37.67	100	80	Peak

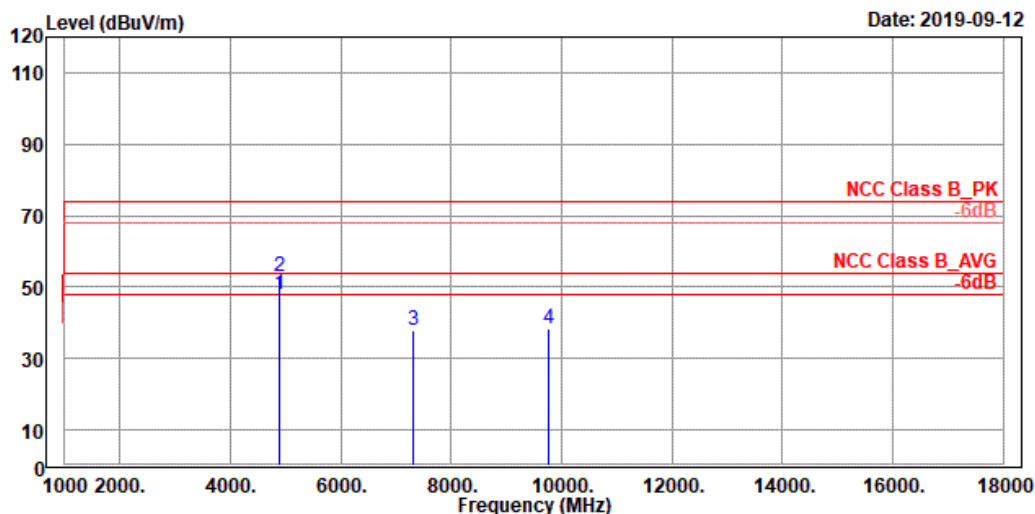


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	4884.000	48.11	58.45	-10.34	54.00	-5.89	178	334	Average
2	4884.000	52.91	63.25	-10.34	74.00	-21.09	178	334	Peak
3	7326.610	37.81	45.70	-7.89	74.00	-36.19	178	334	Peak
4	9768.064	38.13	43.24	-5.11	74.00	-35.87	178	334	Peak

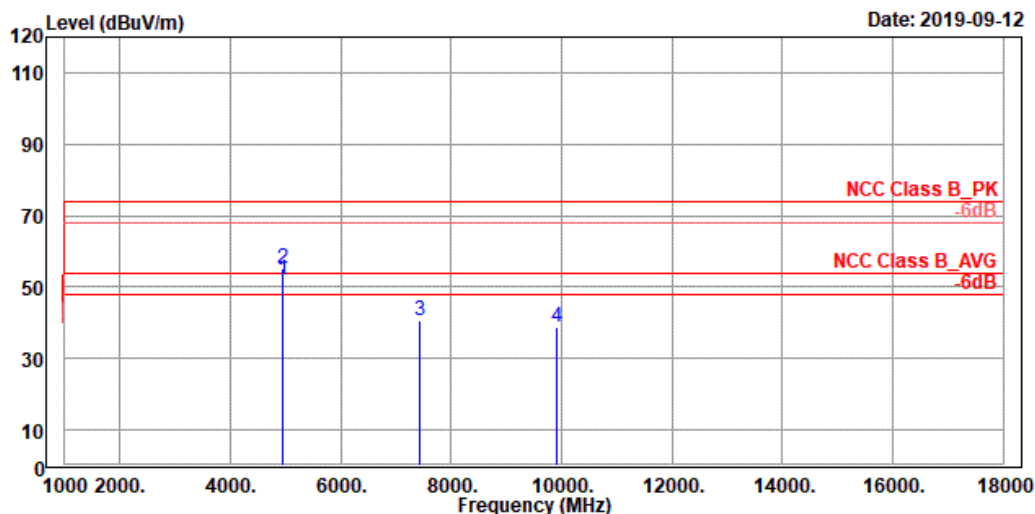

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 3

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	4960.000	52.11	62.39	-10.28	54.00	-1.89	100	67	Average
2	4960.000	55.03	65.31	-10.28	74.00	-18.97	100	67	Peak
3	7440.370	40.71	48.49	-7.78	74.00	-33.29	100	67	Peak
4	9920.577	38.97	43.80	-4.83	74.00	-35.03	100	67	Peak

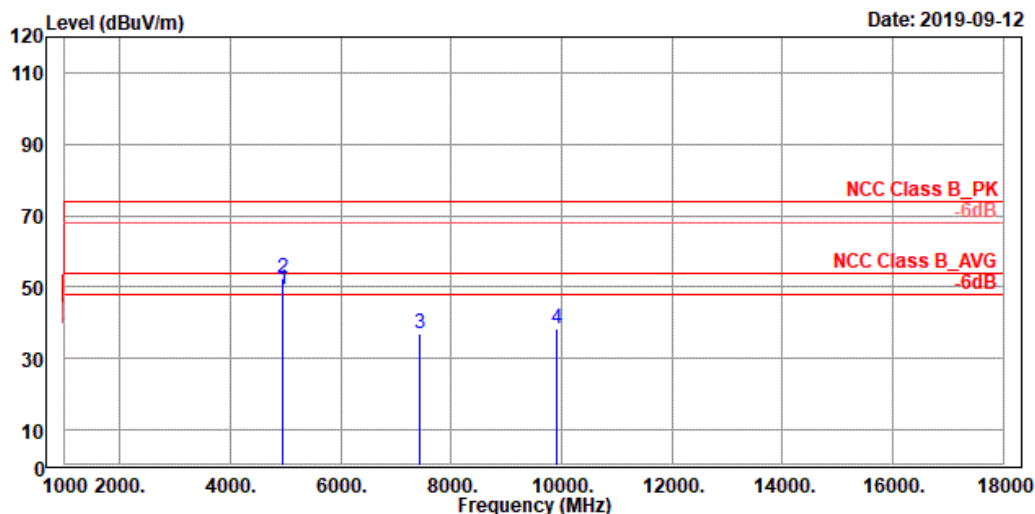


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 3

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	4960.000	49.38	59.66	-10.28	54.00	-4.62	196	326	Average
2	4960.000	52.51	62.79	-10.28	74.00	-21.49	196	326	Peak
3	7440.370	37.08	44.86	-7.78	74.00	-36.92	196	326	Peak
4	9920.577	38.26	43.09	-4.83	74.00	-35.74	196	326	Peak

Spurious Emissions, TX Mode, 18-26G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

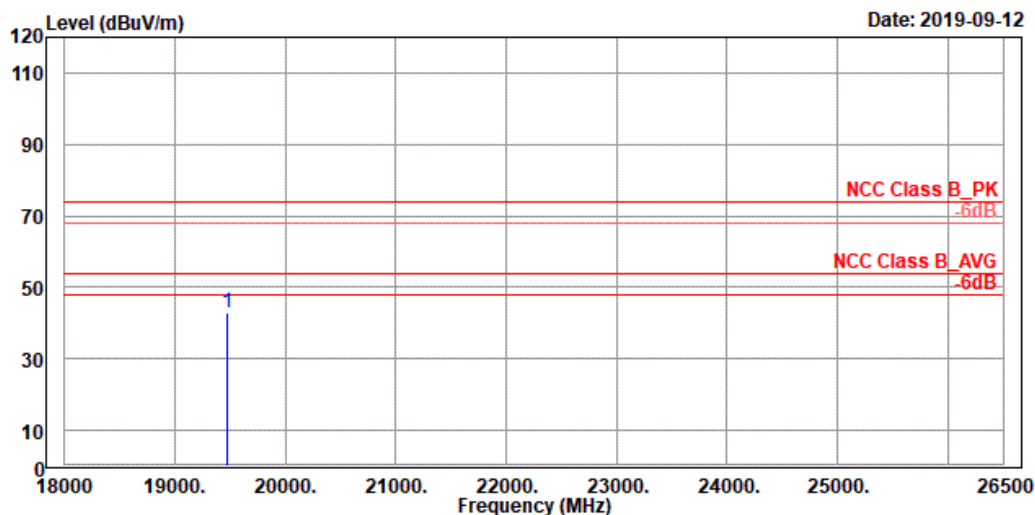


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19469.910	42.70	43.04	-0.34	74.00	-31.30	100	122	Peak

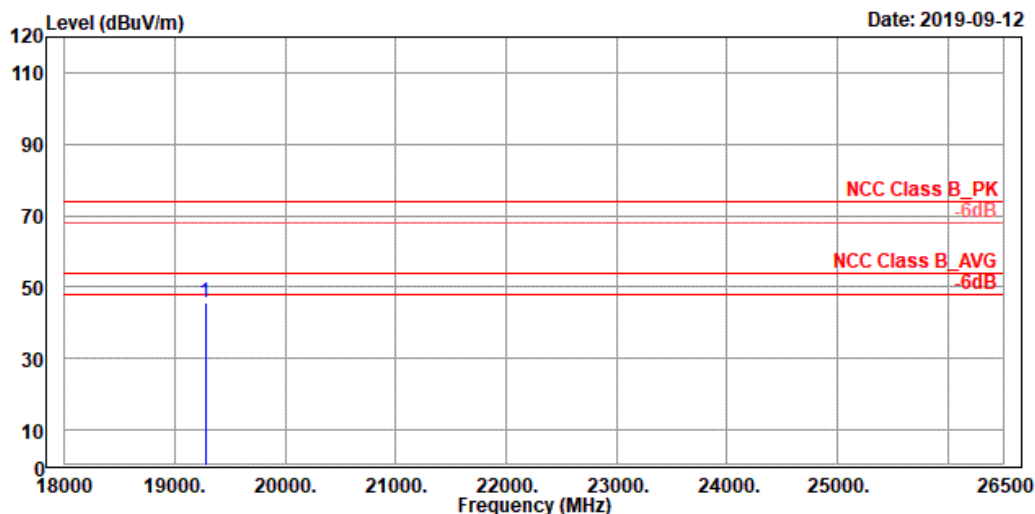


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2403MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19271.560	45.76	46.22	-0.46	74.00	-28.24	100	162	Peak

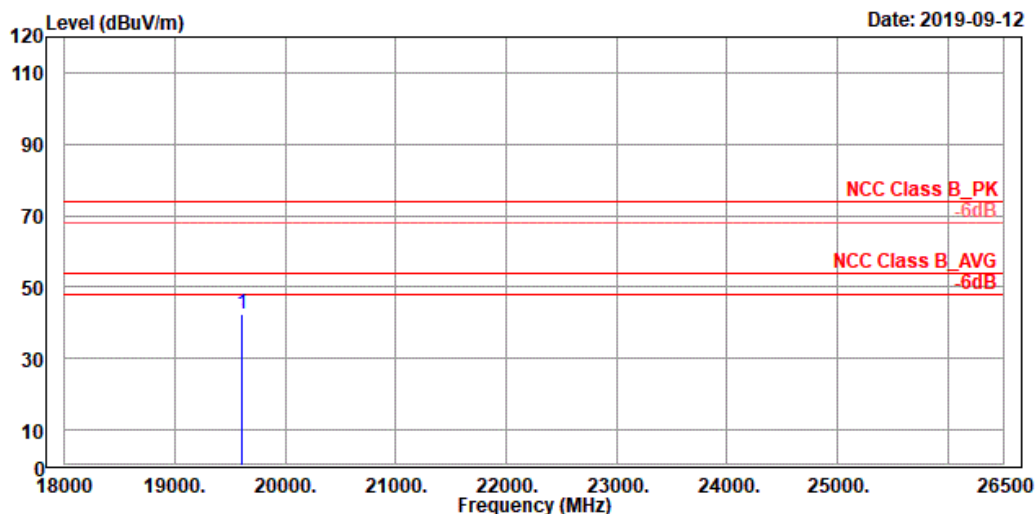


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19610.880	42.43	42.60	-0.17	74.00	-31.57	100	251	Peak

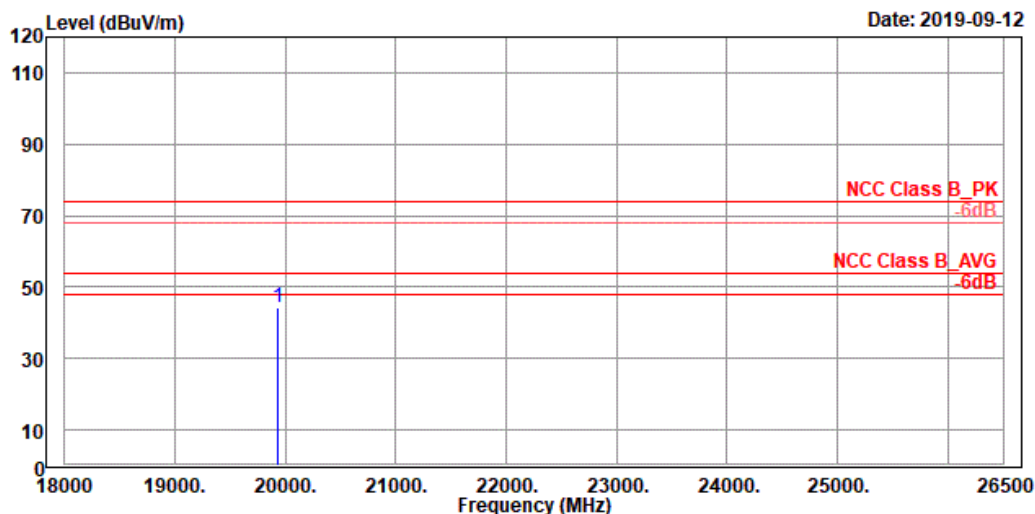


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19923.290	44.47	44.23	0.24	74.00	-29.53	100	164	Peak

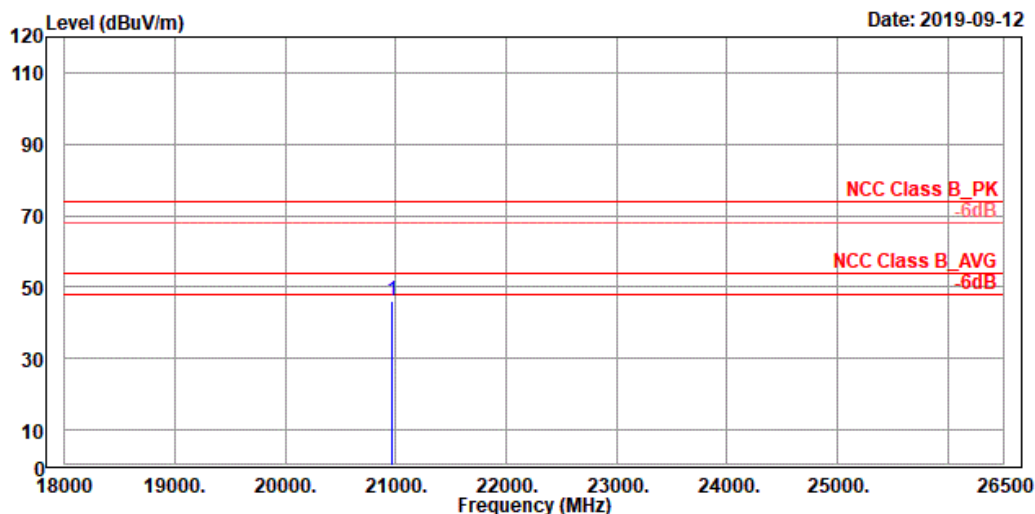

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 3

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	20958.250	46.20	44.71	1.49	74.00	-27.80	100	74	Peak

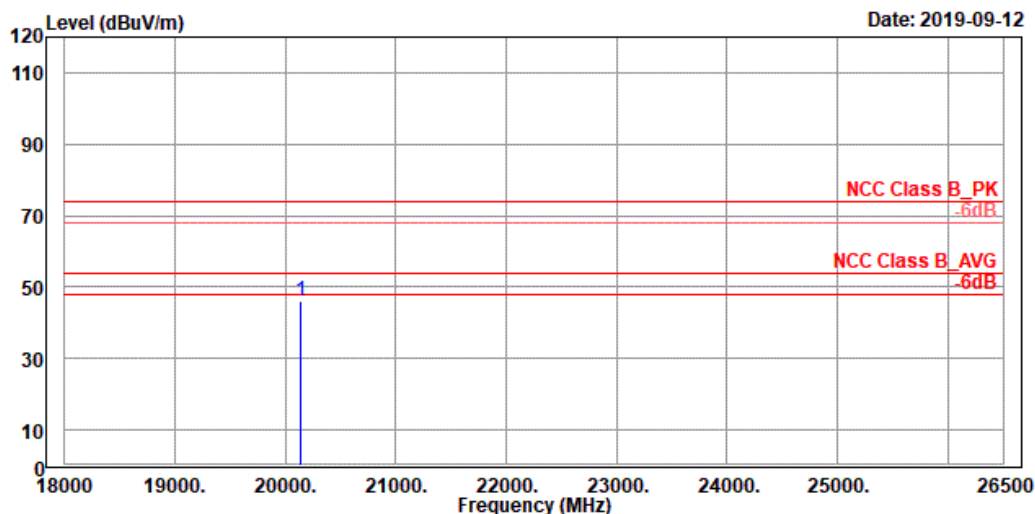


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2480MHz
Power setting: 3

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	20135.800	45.88	45.32	0.56	74.00	-28.12	100	61	Peak

Spurious Emissions, TX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

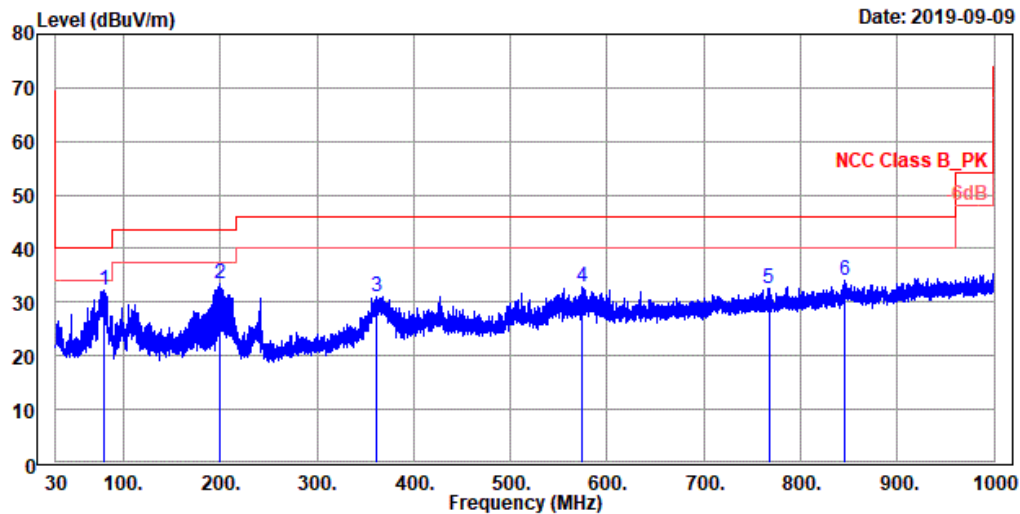

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	80.036	32.13	42.97	-10.84	40.00	-7.87	100	182	QP
2	198.942	33.49	41.84	-8.35	43.50	-10.01	100	95	QP
3	362.063	30.94	34.82	-3.88	46.00	-15.06	198	360	QP
4	573.443	32.70	33.20	-0.50	46.00	-13.30	134	360	QP
5	767.200	32.54	30.07	2.47	46.00	-13.46	101	360	QP
6	845.770	34.09	30.66	3.43	46.00	-11.91	200	232	QP

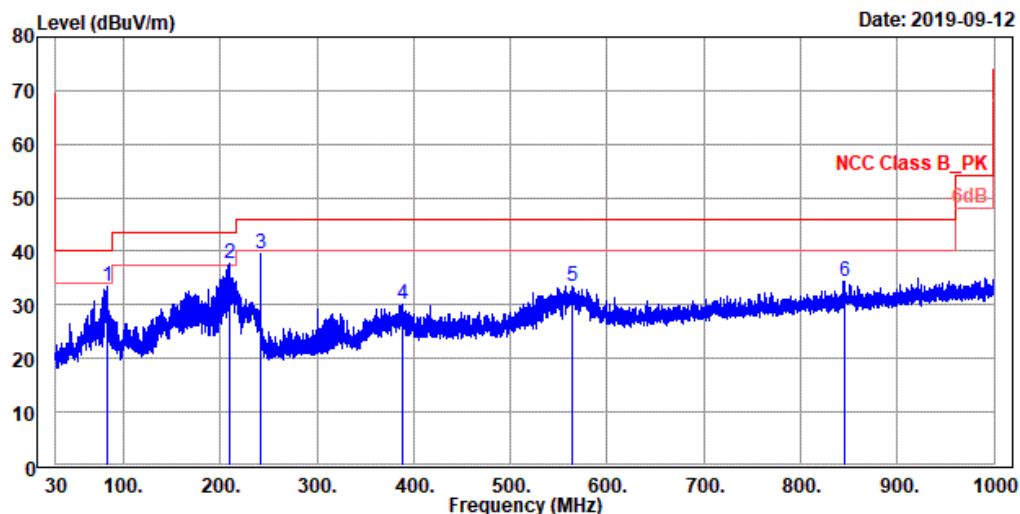


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	82.542	33.38	44.69	-11.31	40.00	-6.62	277	0	QP
2 !	208.965	37.68	45.98	-8.30	43.50	-5.82	100	218	QP
3	241.137	39.60	46.43	-6.83	46.00	-6.40	100	25	QP
4	388.658	30.13	33.44	-3.31	46.00	-15.87	193	360	QP
5	564.470	33.48	34.16	-0.68	46.00	-12.52	179	360	QP
6	844.881	34.48	31.05	3.43	46.00	-11.52	300	15	QP

Spurious Emissions, TX Mode, 9k-30M




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

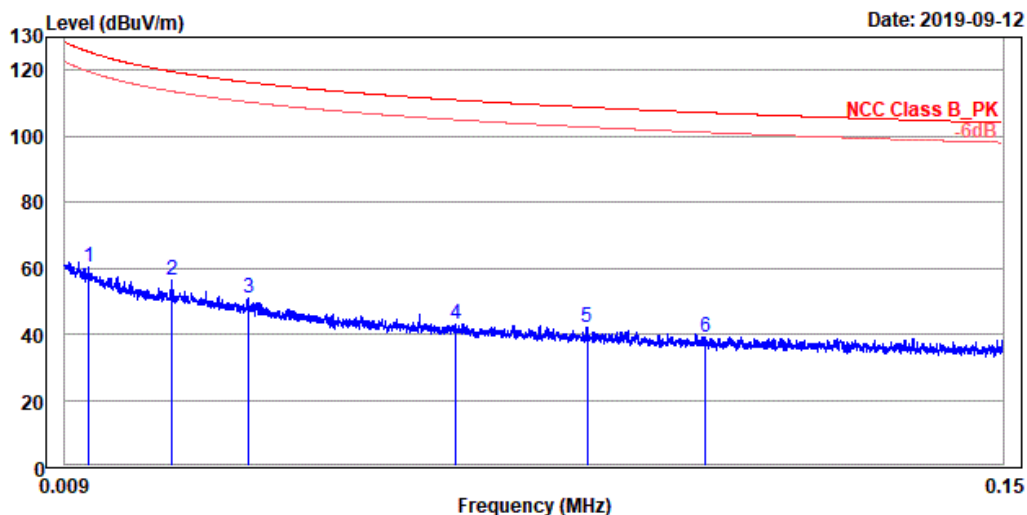

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.013	60.38	-16.82	77.20	125.58	-65.20	100	231	QP
2	0.025	56.24	-15.39	71.63	119.61	-63.37	100	188	QP
3	0.037	50.79	-17.87	68.66	116.34	-65.55	100	201	QP
4	0.068	43.23	-19.41	62.64	110.98	-67.75	100	174	QP
5	0.087	42.16	-18.49	60.65	108.76	-66.60	100	0	QP
6	0.105	39.16	-19.79	58.95	107.16	-68.00	100	0	QP

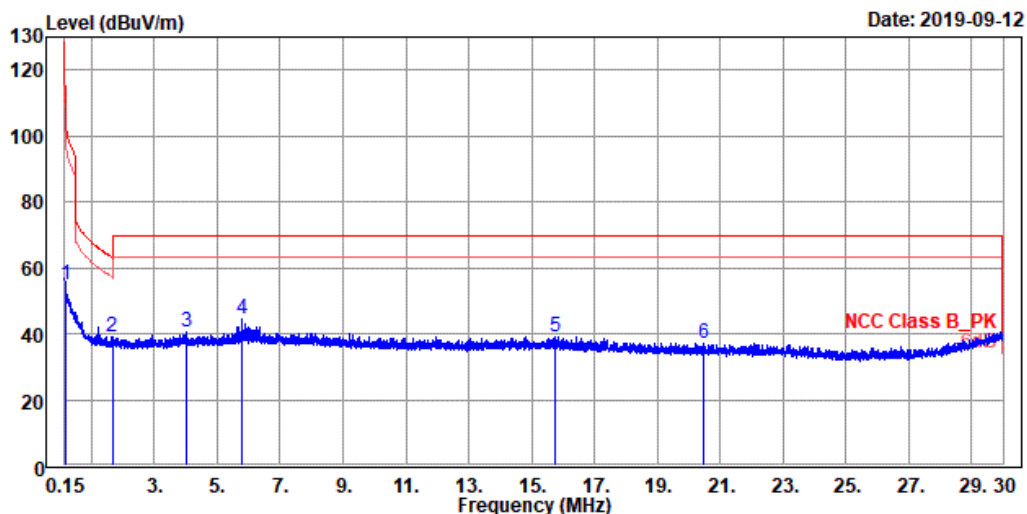


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : Electromagnetic brake unit
Model NO : 自行車訓練台
Test Rating : T8000D
Tmp/Hum : 23.5°C/67%
Mode : ANT+_TX_2442MHz
Power setting: 2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.172	55.09	0.04	55.05	102.87	-47.78	100	28	QP
2	1.657	39.17	0.03	39.14	63.22	-24.05	100	69	QP
3	4.001	40.62	2.29	38.33	69.50	-28.88	100	107	QP
4	5.797	44.45	6.09	38.36	69.50	-25.05	100	0	QP
5	15.759	39.12	1.54	37.58	69.50	-30.38	100	360	QP
6	20.483	37.04	0.88	36.16	69.50	-32.46	100	51	QP

Spurious Emissions, RX Mode, 1-18G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

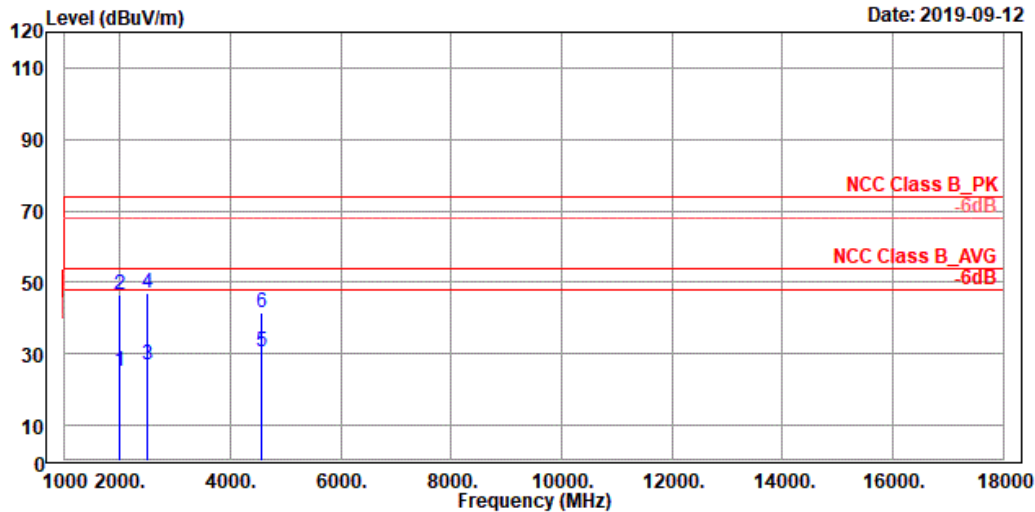

Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	1996.000	25.16	40.23	-15.07	54.00	-28.84	100	166	Average
2	1996.000	46.51	61.58	-15.07	74.00	-27.49	100	166	Peak
3	2496.125	26.70	40.23	-13.53	54.00	-27.30	200	193	Average
4	2496.125	46.87	60.40	-13.53	74.00	-27.13	200	193	Peak
5	4568.881	30.46	40.14	-9.68	54.00	-23.54	200	78	Average
6	4568.881	41.40	51.08	-9.68	74.00	-32.60	200	78	Peak

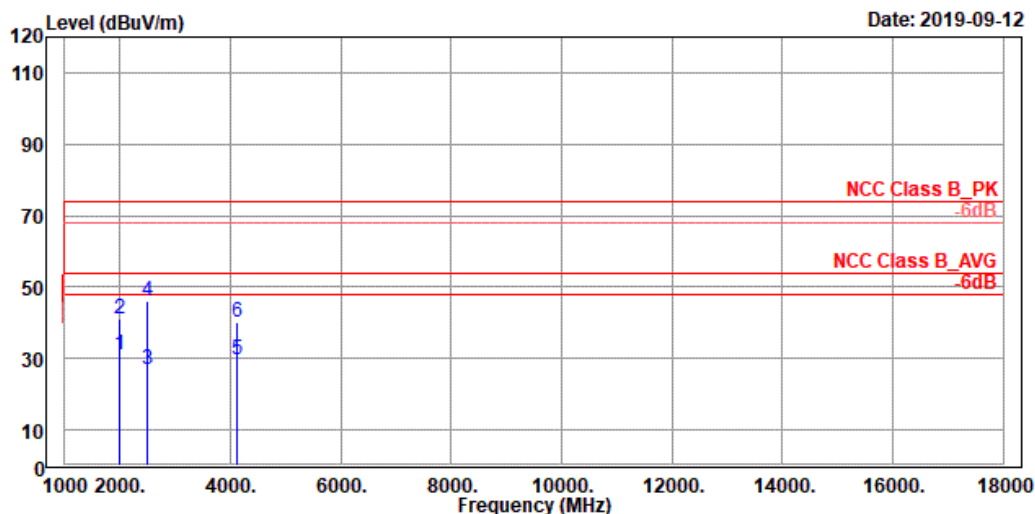


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	1998.833	31.19	46.23	-15.04	54.00	-22.81	100	165	Average
2	1998.833	41.24	56.28	-15.04	74.00	-32.76	100	165	Peak
3	2490.458	26.74	40.26	-13.52	54.00	-27.26	200	191	Average
4	2490.458	46.28	59.80	-13.52	74.00	-27.72	200	191	Peak
5	4114.093	29.75	40.27	-10.52	54.00	-24.25	100	346	Average
6	4114.093	40.24	50.76	-10.52	74.00	-33.76	100	346	Peak

Spurious Emissions, RX Mode, 18-26G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

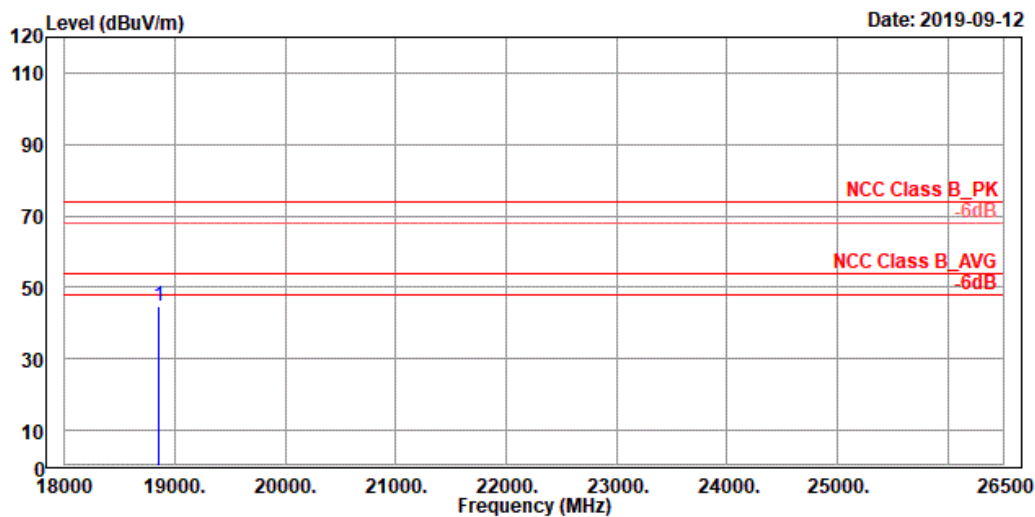

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18855.740	44.69	45.23	-0.54	74.00	-29.31	100	312	Peak

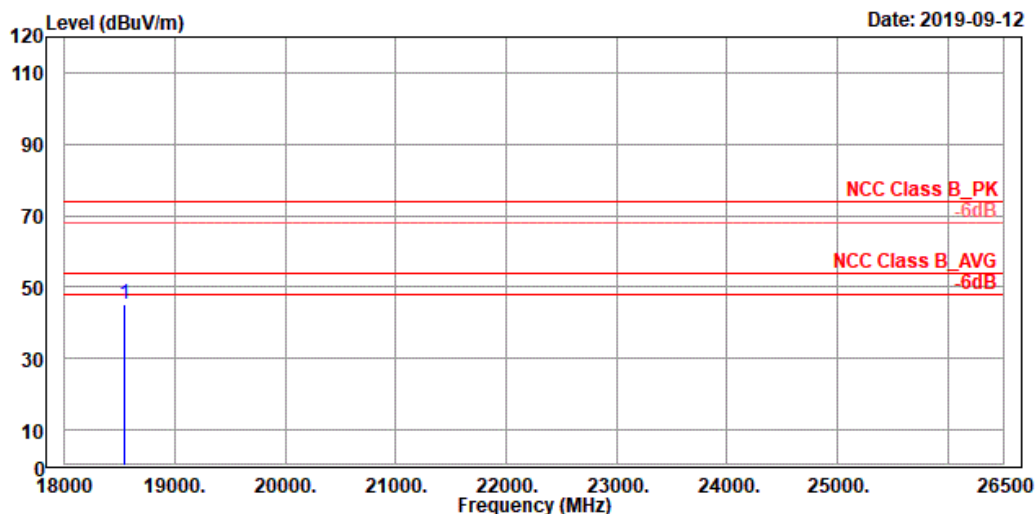


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18534.840	45.06	45.87	-0.81	74.00	-28.94	100	250	Peak

Spurious Emissions, RX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

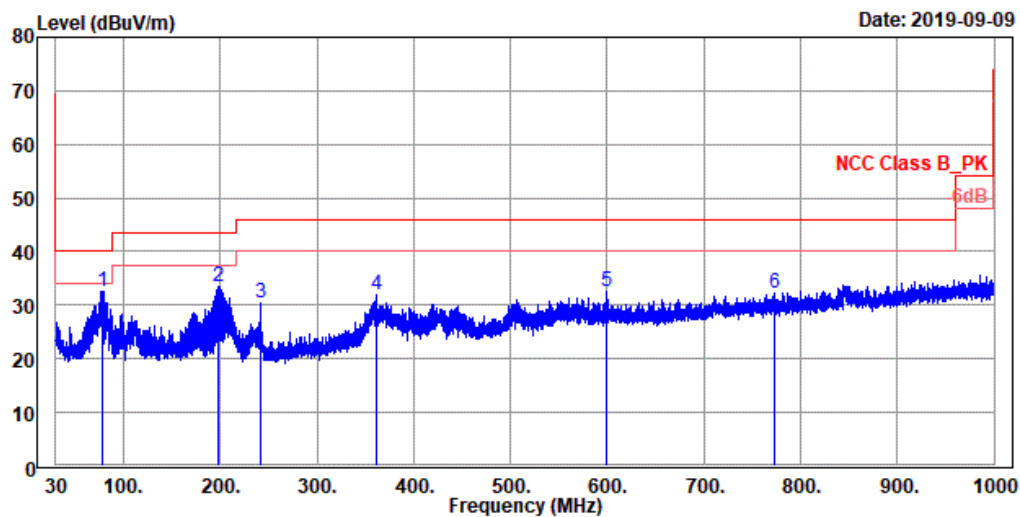

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read	Limit	Over	APos	TPos	Remark
	MHz	dBuV/m	Level	Factor	Line	Limit		
			dBuV	dB/m	dBuV/m	dB	cm	deg
1	77.449	32.67	42.98	-10.31	40.00	-7.33	100	194 QP
2	198.214	33.39	41.79	-8.40	43.50	-10.11	100	108 QP
3	241.056	30.30	37.13	-6.83	46.00	-15.70	200	61 QP
4	361.578	31.84	35.74	-3.90	46.00	-14.16	200	1 QP
5	599.552	32.41	32.25	0.16	46.00	-13.59	127	360 QP
6	773.424	32.34	29.82	2.52	46.00	-13.66	400	2 QP

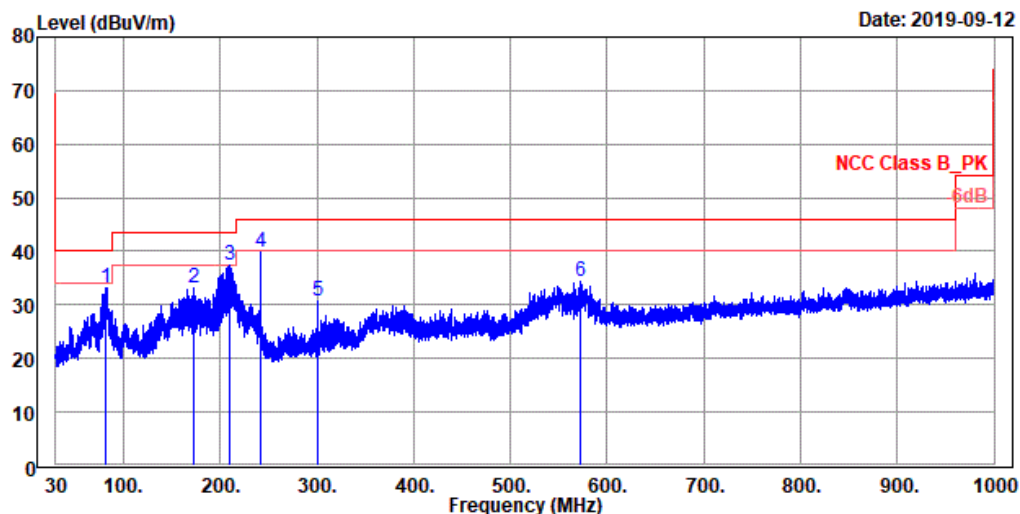


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	81.491	33.23	44.35	-11.12	40.00	-6.77	246	0	QP
2	172.590	33.07	39.40	-6.33	43.50	-10.43	173	360	QP
3	210.097	37.36	45.67	-8.31	43.50	-6.14	100	225	QP
4	241.137	39.81	46.64	-6.83	46.00	-6.19	100	35	QP
5	301.358	30.65	35.49	-4.84	46.00	-15.35	100	31	QP
6	572.796	34.45	34.96	-0.51	46.00	-11.55	100	7	QP

Spurious Emissions, RX Mode, 9K-30M




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

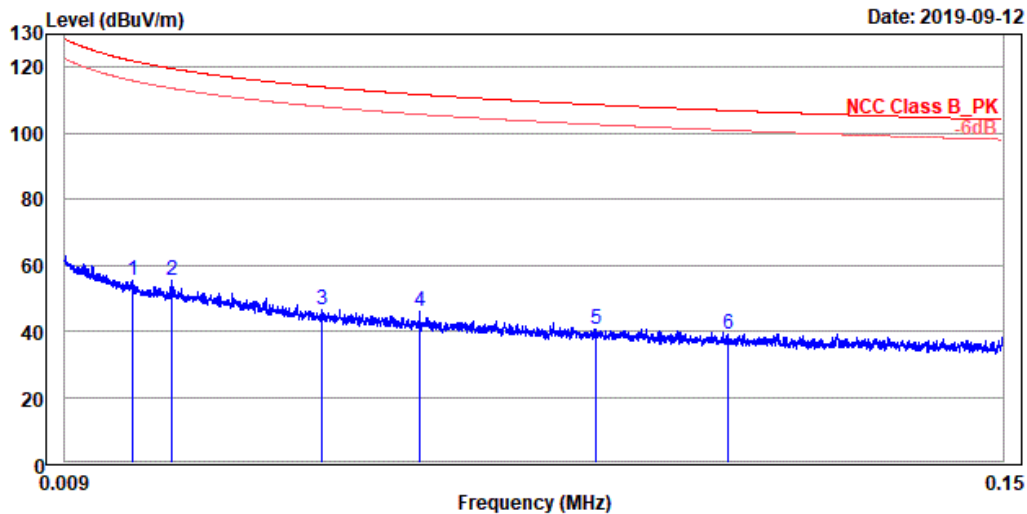

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.019	55.21	-17.89	73.10	121.97	-66.76	100	312	QP
2	0.025	55.56	-16.08	71.64	119.63	-64.07	100	258	QP
3	0.048	46.64	-19.02	65.66	114.05	-67.41	100	55	QP
4	0.062	45.96	-17.39	63.35	111.70	-65.74	100	0	QP
5	0.089	40.62	-19.93	60.55	108.63	-68.01	100	0	QP
6	0.109	39.14	-19.61	58.75	106.88	-67.74	100	14	QP

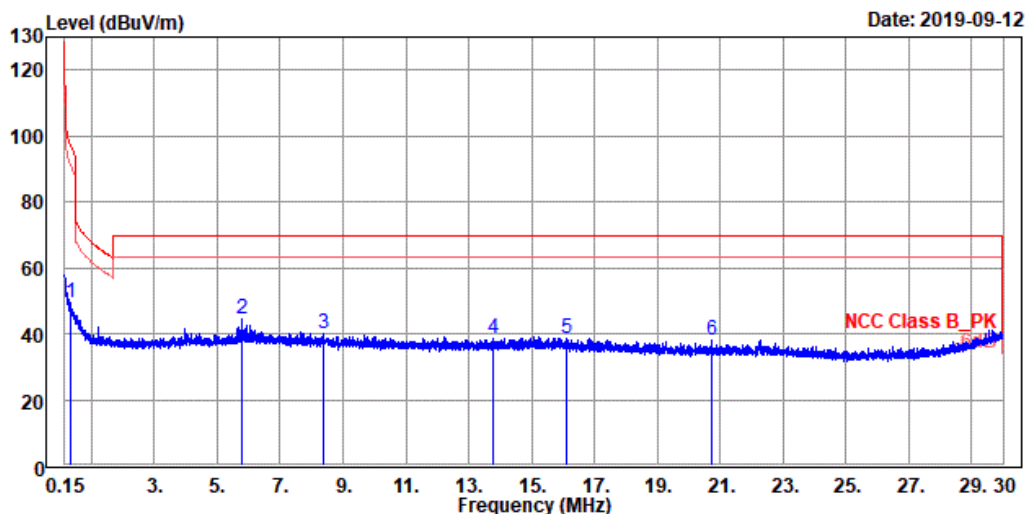


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : ANT+_RX_2442MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.314	49.23	-0.93	50.16	97.66	-48.43	100	213	QP
2	5.794	44.57	6.21	38.36	69.50	-24.93	100	0	QP
3	8.361	39.92	1.95	37.97	69.50	-29.58	100	360	QP
4	13.799	38.43	0.85	37.58	69.50	-31.07	100	28	QP
5	16.100	38.64	1.15	37.49	69.50	-30.86	100	0	QP
6	20.717	38.12	2.00	36.12	69.50	-31.38	100	14	QP




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

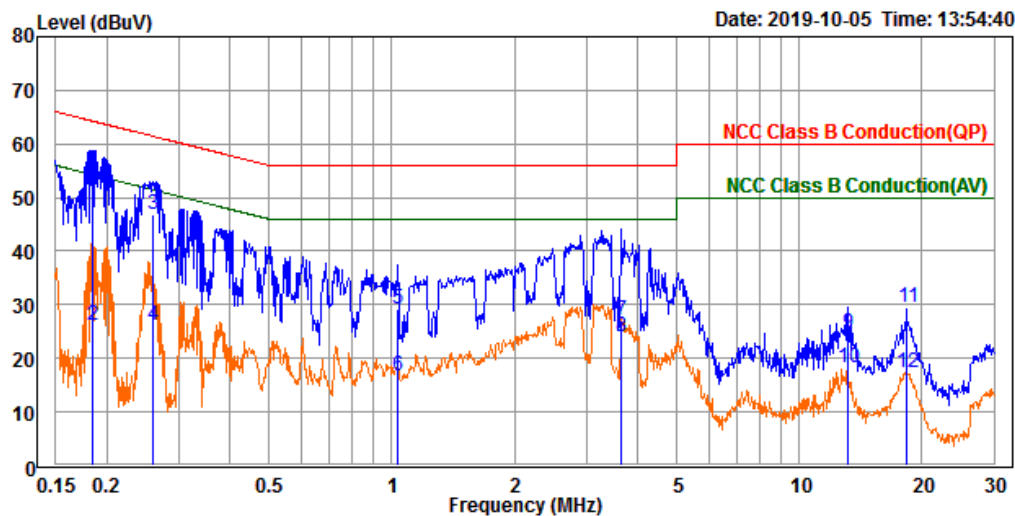

Trace: 1

Site : Conduction room
Condition : NCC Class B Conduction(QP) line1
Test Engineer: Amy Hsu
Product : 自行車訓練台
Model No. : T8000D
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.1°C / 35%
Mode : ANT+ TX 2403

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.185	42.13	9.61	51.74	64.26	-12.52	QP
2	0.185	16.56	9.61	26.17	54.26	-28.09	Average
3	0.260	37.32	9.61	46.93	61.45	-14.52	QP
4	0.260	16.68	9.61	26.29	51.45	-25.16	Average
5	1.037	19.60	9.62	29.22	56.00	-26.78	QP
6	1.037	7.03	9.62	16.65	46.00	-29.35	Average
7	3.643	17.37	9.67	27.04	56.00	-28.96	QP
8	3.643	14.48	9.67	24.15	46.00	-21.85	Average
9	13.116	15.03	9.75	24.78	60.00	-35.22	QP
10	13.116	8.58	9.75	18.33	50.00	-31.67	Average
11	18.407	19.67	9.79	29.46	60.00	-30.54	QP
12	18.407	7.42	9.79	17.21	50.00	-32.79	Average

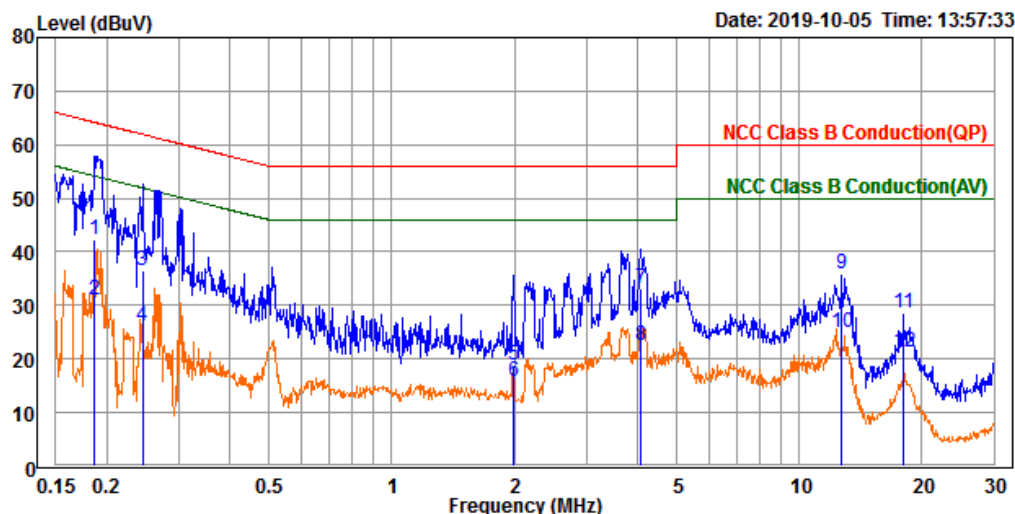

Trace: 1


Site : Conduction room
Condition : NCC Class B Conduction(QP) neutral
Test Engineer: Amy Hsu
Product : 自行車訓練台
Model No. : T8000D
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.1°C / 35%
Mode : ANT+ TX 2403

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.187	32.76	9.62	42.38	64.18	-21.80	QP
2	0.187	21.35	9.62	30.97	54.18	-23.21	Average
3	0.244	27.03	9.62	36.65	61.94	-25.29	QP
4	0.244	16.62	9.62	26.24	51.94	-25.70	Average
5	1.983	9.10	9.65	18.75	56.00	-37.25	QP
6	1.983	6.04	9.65	15.69	46.00	-30.31	Average
7	4.086	23.56	9.68	33.24	56.00	-22.76	QP
8	4.086	12.89	9.68	22.57	46.00	-23.43	Average
9	12.729	26.09	9.77	35.86	60.00	-24.14	QP
10	12.729	15.32	9.77	25.09	50.00	-24.91	Average
11	17.954	18.78	9.81	28.59	60.00	-31.41	QP
12	17.954	11.53	9.81	21.34	50.00	-28.66	Average

Spurious Emissions, Band Edges, 2.35-2.5G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

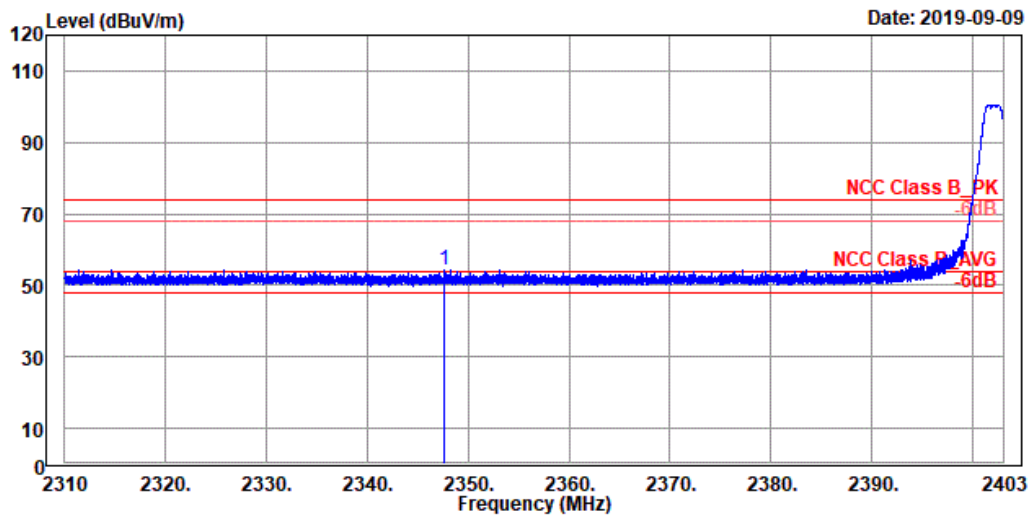


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2347.567	54.28	17.12	37.16	74.00	-19.72	114	187	Peak

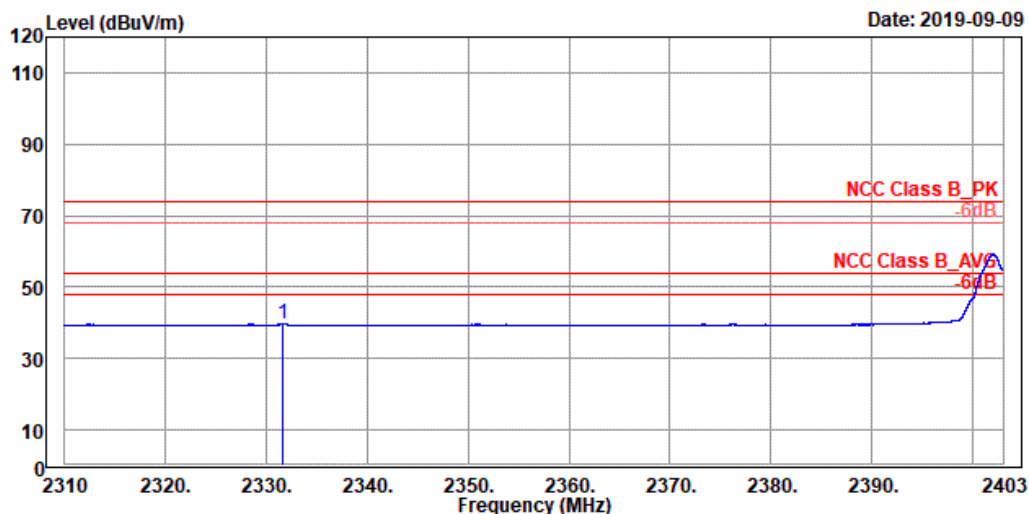


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2331.562	39.57	2.49	37.08	54.00	-14.43	114	187	Average

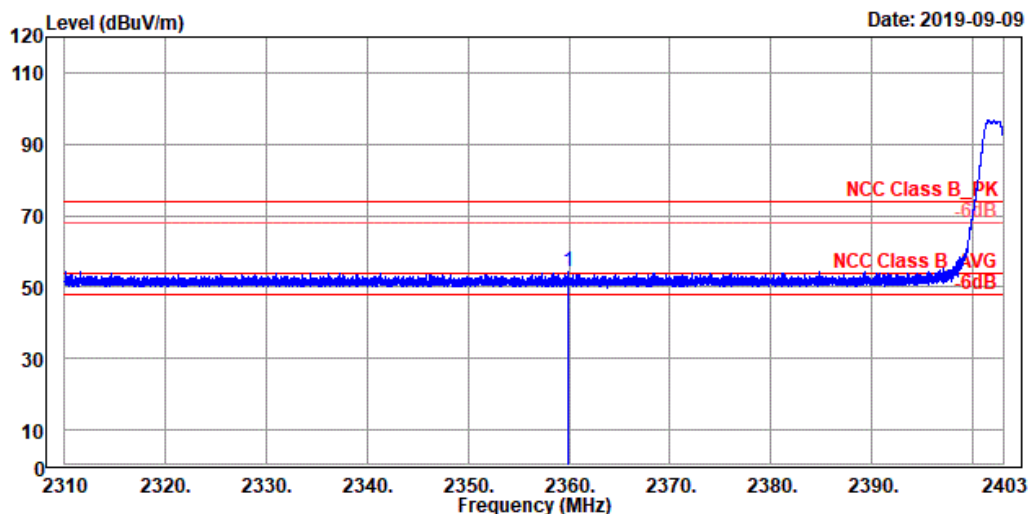


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2359.883	54.32	17.11	37.21	74.00	-19.68	100	207	Peak

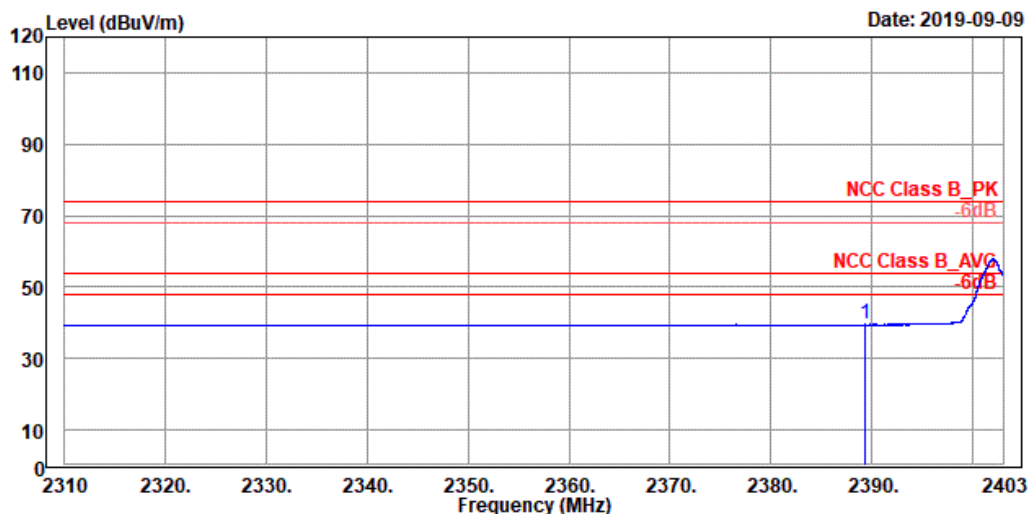


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2389.320	39.49	2.19	37.30	54.00	-14.51	100	207	Average

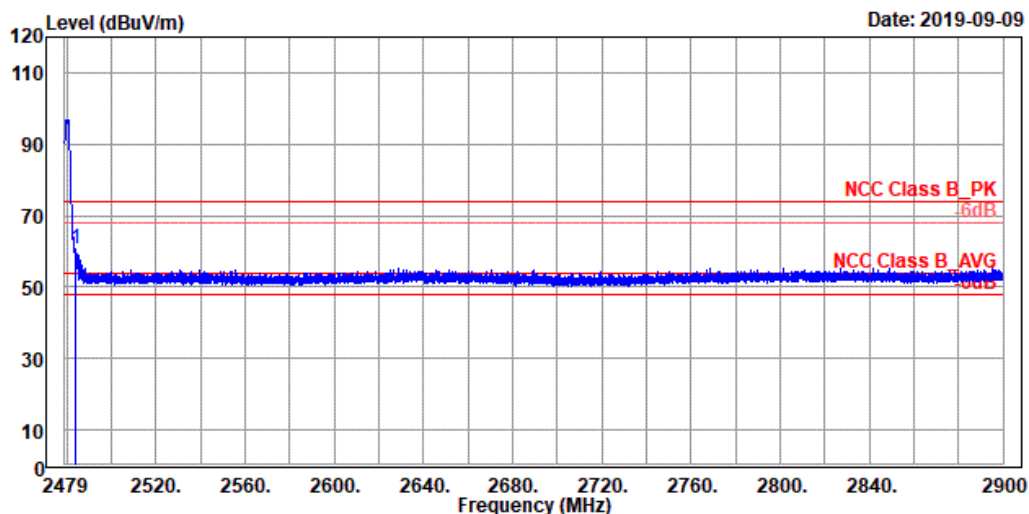


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.526	60.76	23.19	37.57	74.00	-13.24	138	191	Peak

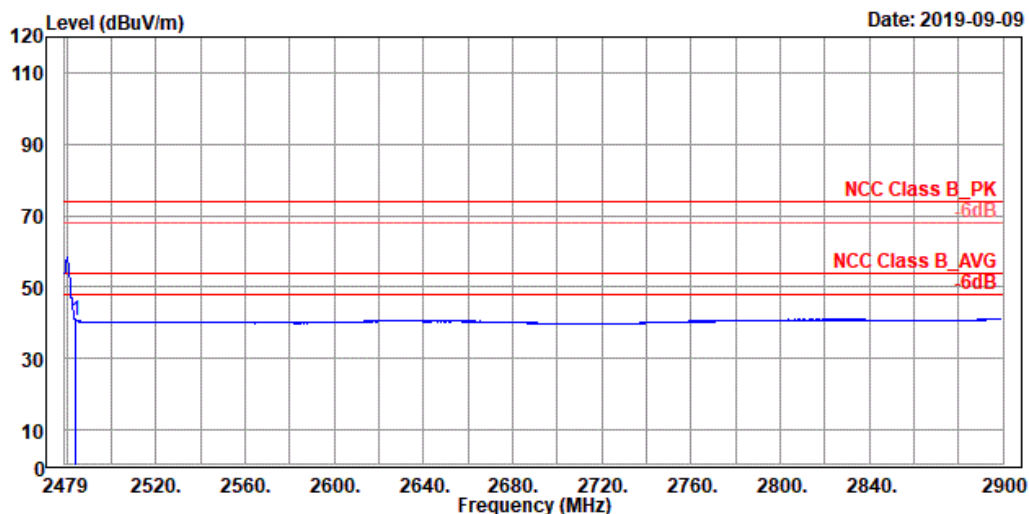


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.500	40.80	3.23	37.57	54.00	-13.20	138	191	Average

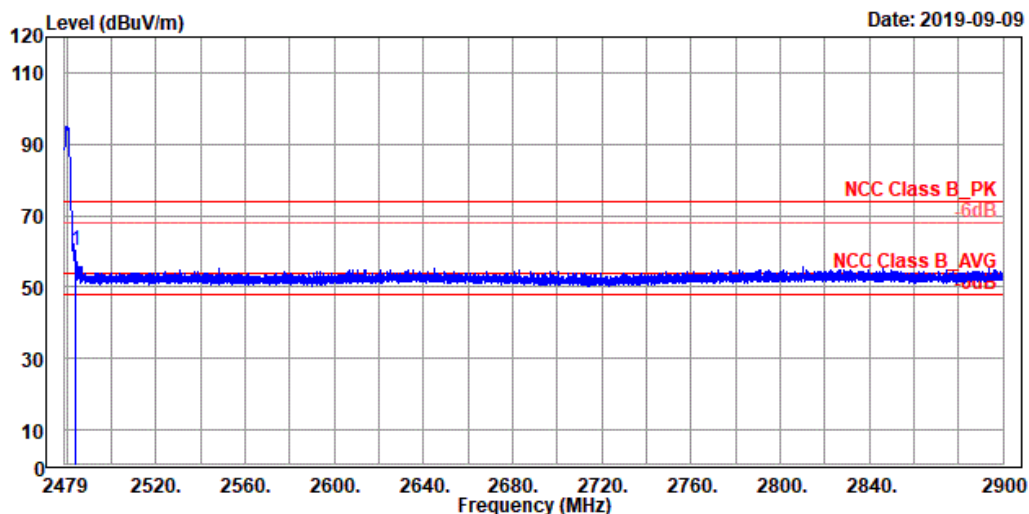

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.667	60.37	22.80	37.57	74.00	-13.63	100	183	Peak

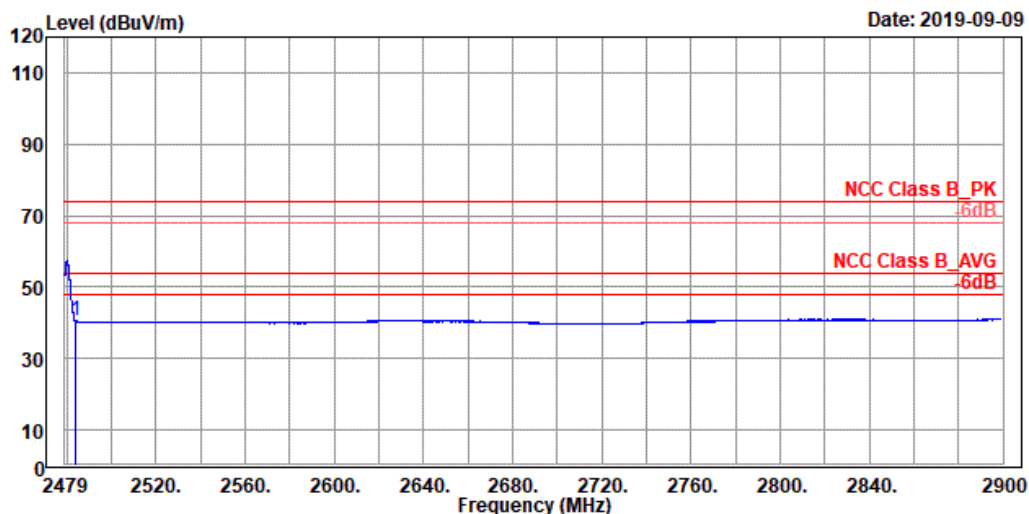


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2483.500	40.59	3.02	37.57	54.00	-13.41	100	183	Average

Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

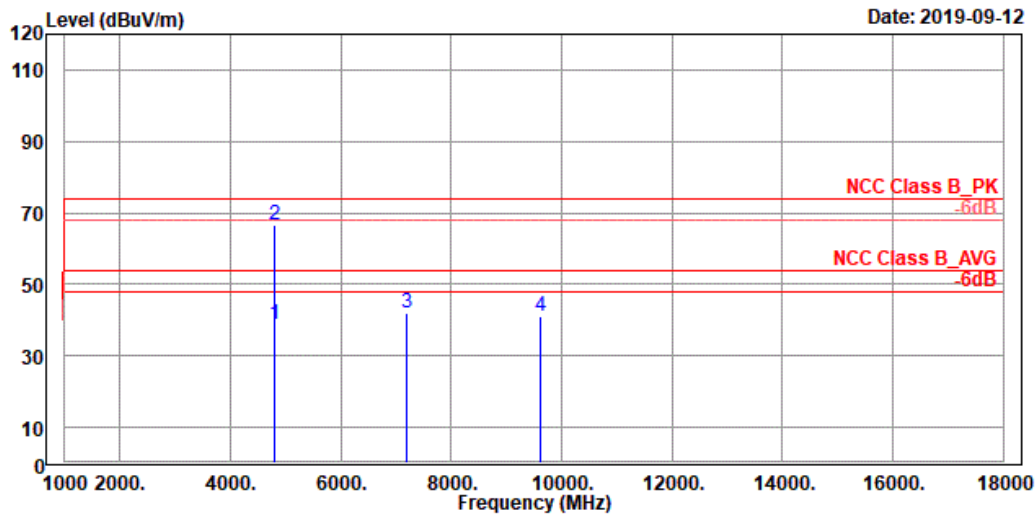


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4804.000	38.77	48.23	-9.46	54.00	-15.23	163	332	Average
2	4804.000	66.42	75.88	-9.46	74.00	-7.58	163	332	Peak
3	7206.601	41.79	48.61	-6.82	74.00	-32.21	400	0	Peak
4	9608.051	41.27	45.41	-4.14	74.00	-32.73	400	0	Peak

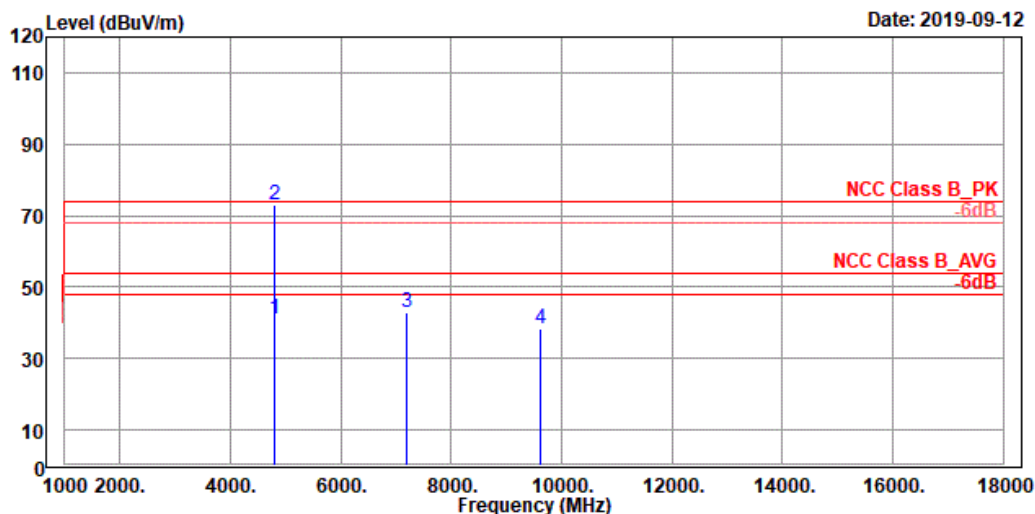


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4804.000	41.06	50.52	-9.46	54.00	-12.94	100	77	Average
2 !	4804.000	73.10	82.56	-9.46	74.00	-0.90	100	77	Peak
3	7206.601	42.70	49.52	-6.82	74.00	-31.30	100	77	Peak
4	9608.051	38.34	42.48	-4.14	74.00	-35.66	100	77	Peak

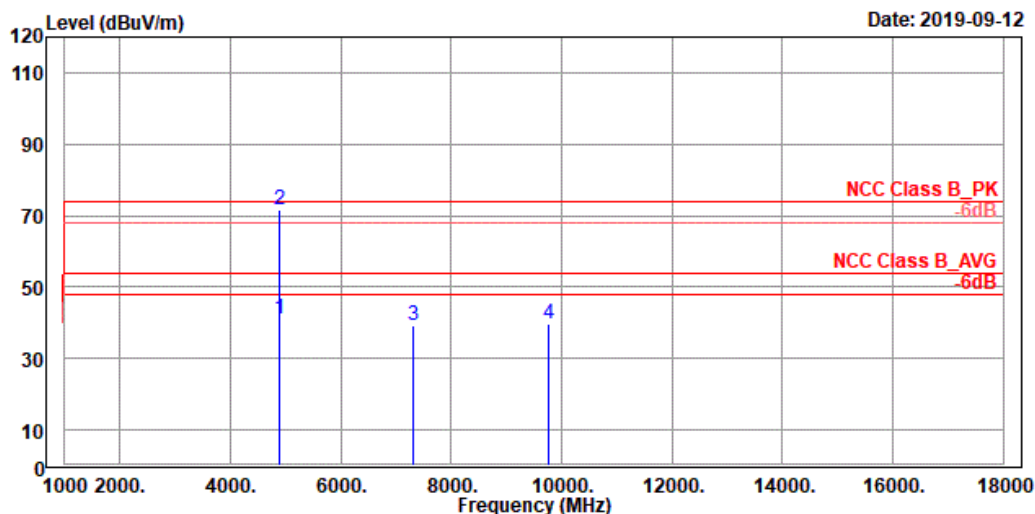


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4880.000	40.95	50.46	-9.51	54.00	-13.05	100	80	Average
2 !	4880.000	71.67	81.18	-9.51	74.00	-2.33	100	80	Peak
3	7320.360	39.42	46.22	-6.80	74.00	-34.58	100	80	Peak
4	9760.563	39.64	43.51	-3.87	74.00	-34.36	100	80	Peak

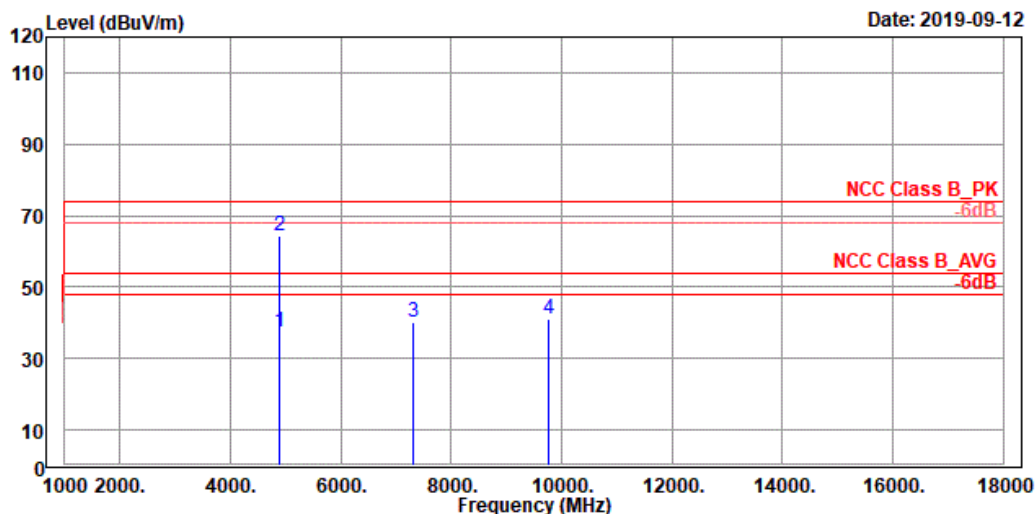


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4880.000	37.22	46.73	-9.51	54.00	-16.78	136	344	Average
2	4880.000	64.23	73.74	-9.51	74.00	-9.77	136	344	Peak
3	7320.360	40.23	47.03	-6.80	74.00	-33.77	136	344	Peak
4	9760.563	40.97	44.84	-3.87	74.00	-33.03	136	344	Peak

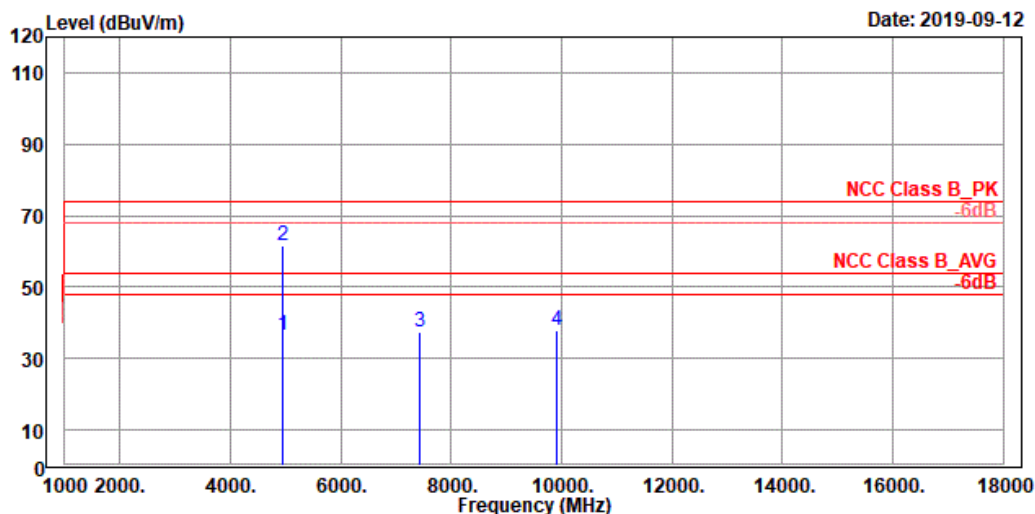

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4960.000	36.37	46.65	-10.28	54.00	-17.63	135	115	Average
2	4960.000	61.80	72.08	-10.28	74.00	-12.20	135	115	Peak
3	7440.370	37.42	45.20	-7.78	74.00	-36.58	135	115	Peak
4	9920.577	37.77	42.60	-4.83	74.00	-36.23	135	115	Peak

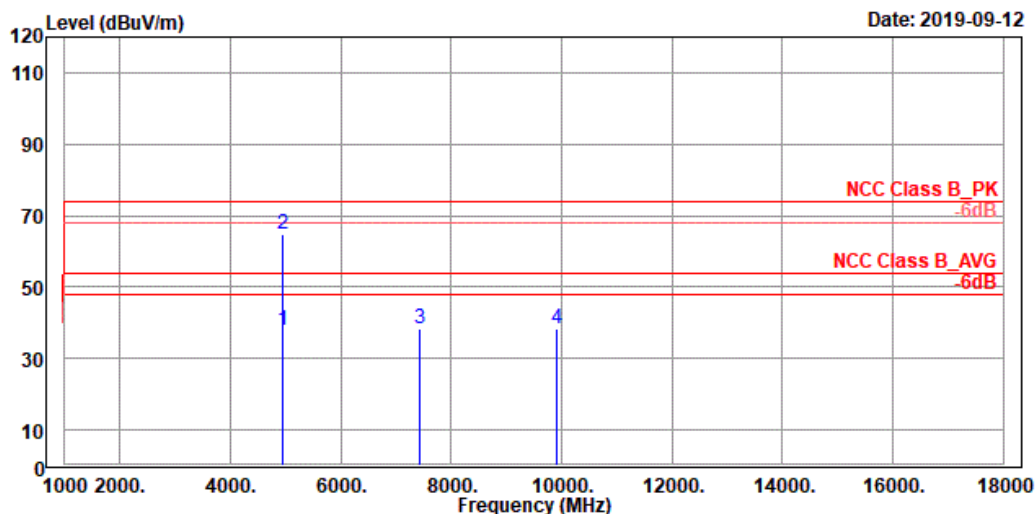


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4960.000	37.98	48.26	-10.28	54.00	-16.02	100	68	Average
2	4960.000	64.59	74.87	-10.28	74.00	-9.41	100	68	Peak
3	7440.370	38.50	46.28	-7.78	74.00	-35.50	100	68	Peak
4	9920.577	38.50	43.33	-4.83	74.00	-35.50	100	68	Peak

Spurious Emissions, TX Mode, 18-26G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

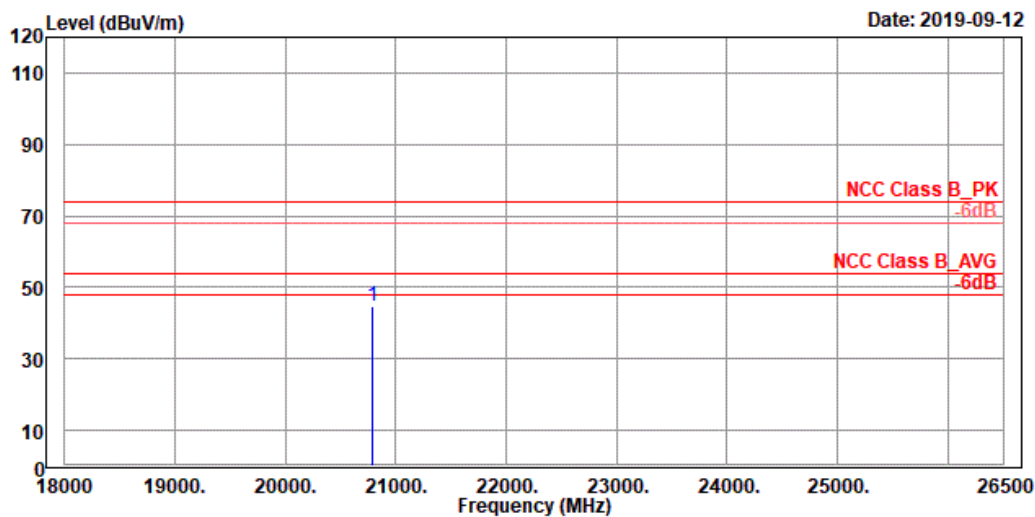


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	20788.940	44.92	43.58	1.34	74.00	-29.08	100	255	Peak

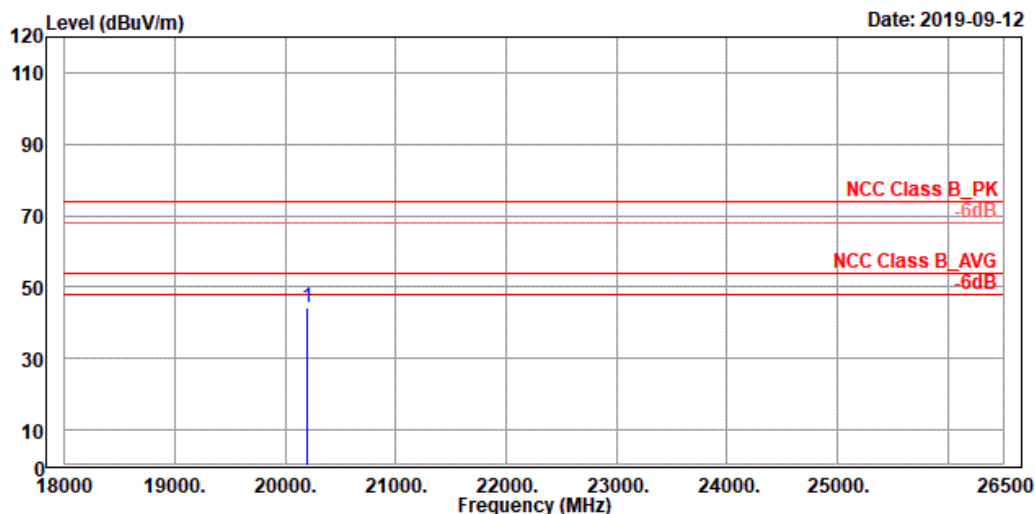


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2402MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	20196.720	44.38	43.70	0.68	74.00	-29.62	100	16	Peak

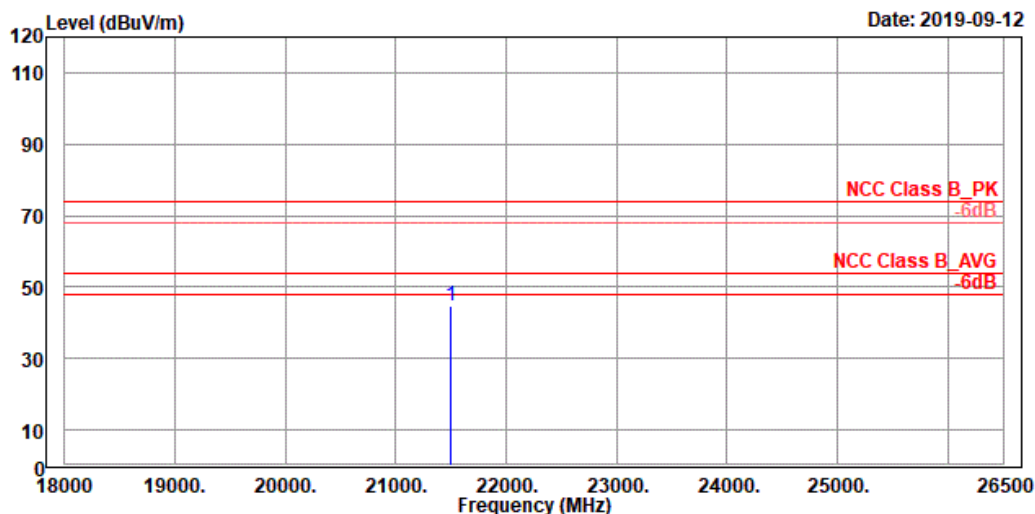


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	21496.630	44.52	42.30	2.22	74.00	-29.48	100	123	Peak

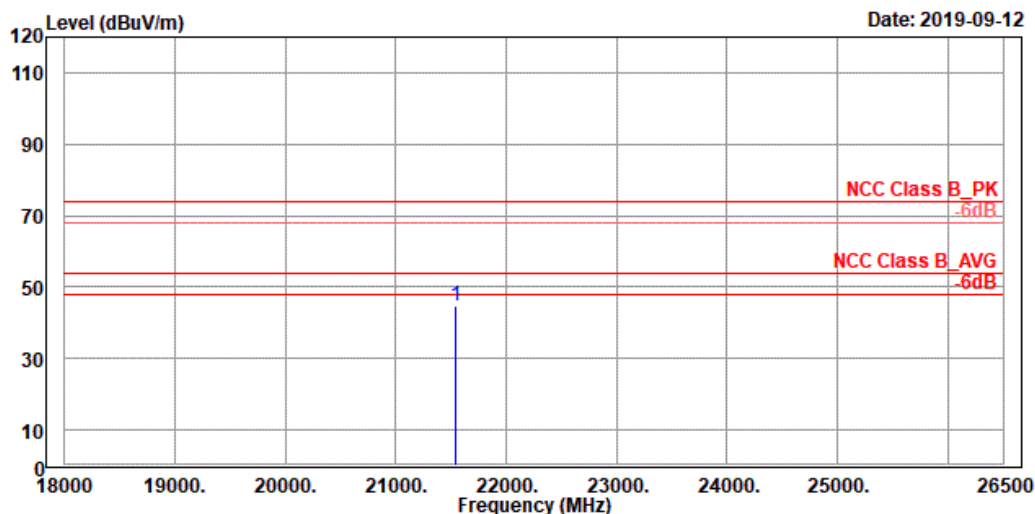


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	21540.540	44.69	42.46	2.23	74.00	-29.31	100	147	Peak

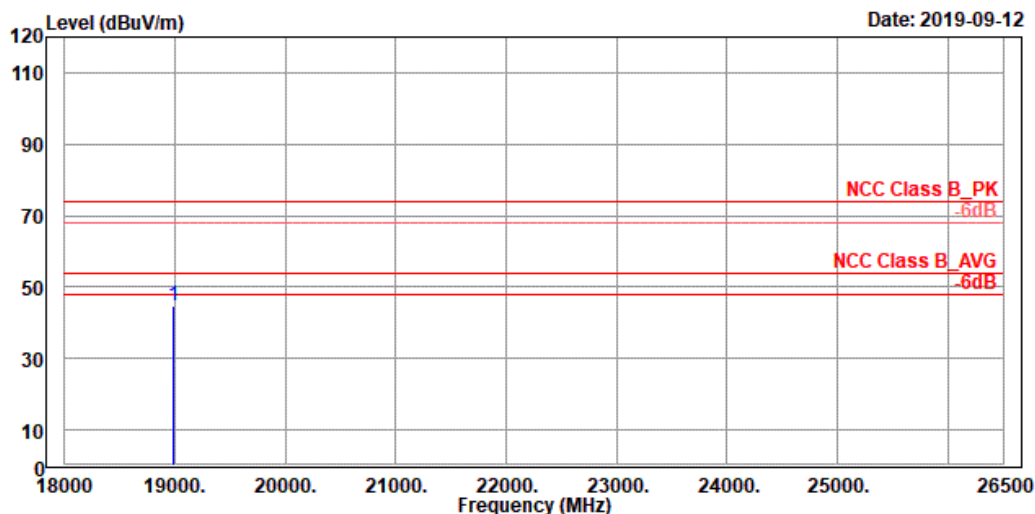

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18988.210	44.63	45.06	-0.43	74.00	-29.37	100	32	Peak

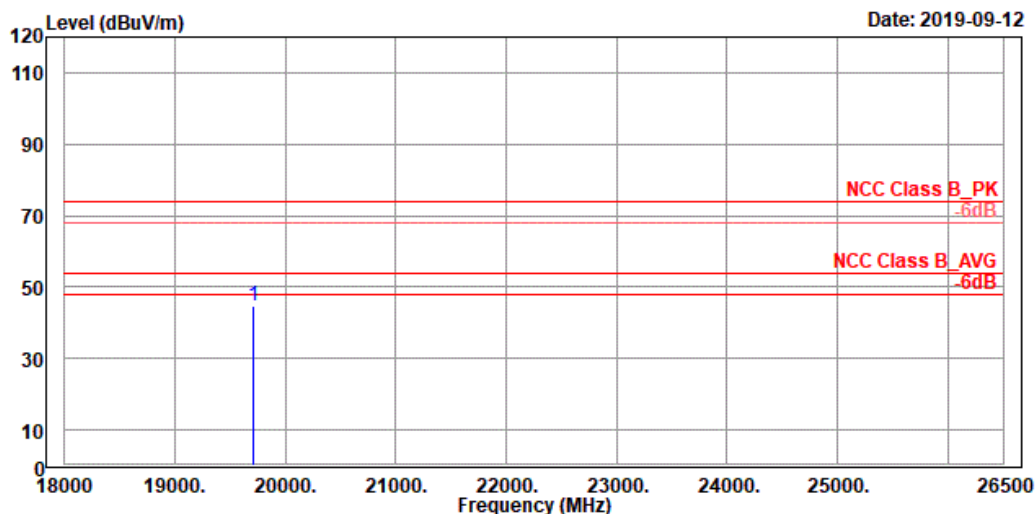


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2480MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19709.350	44.68	44.72	-0.04	74.00	-29.32	100	174	Peak

Spurious Emissions, TX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

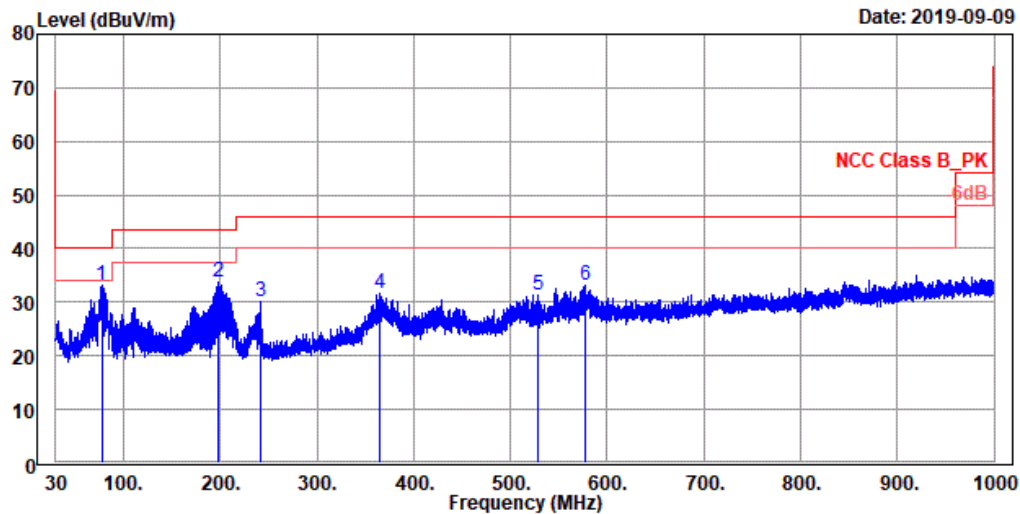

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	77.288	33.02	43.31	-10.29	40.00	-6.98	100	196	QP
2	198.133	33.65	42.05	-8.40	43.50	-9.85	0	0	QP
3	241.056	30.14	36.97	-6.83	46.00	-15.86	200	134	QP
4	364.650	31.59	35.40	-3.81	46.00	-14.41	203	0	QP
5	529.308	31.42	32.78	-1.36	46.00	-14.58	200	203	QP
6	577.242	33.13	33.55	-0.42	46.00	-12.87	130	360	QP

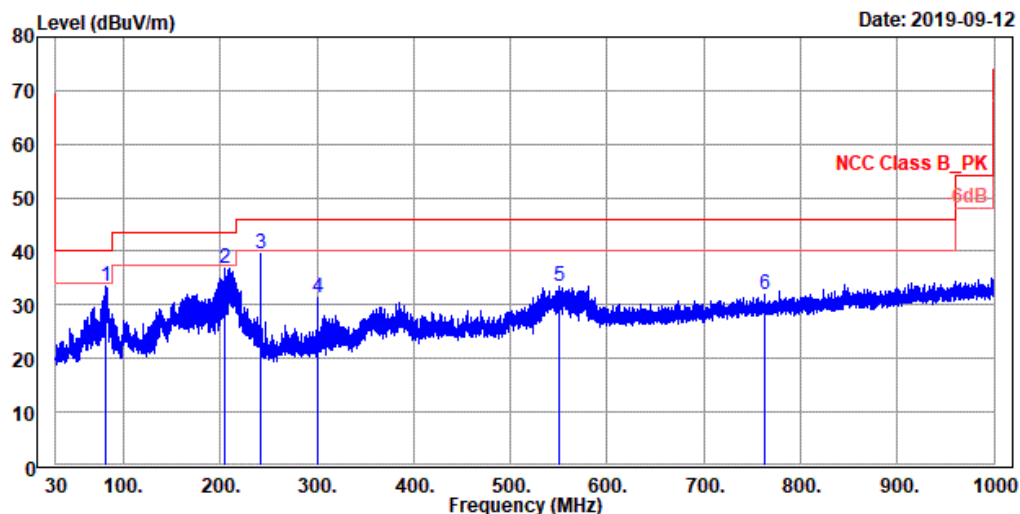


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	81.410	33.58	44.69	-11.11	40.00	-6.42	243	0	QP
2	204.762	36.81	45.14	-8.33	43.50	-6.69	100	219	QP
3	241.137	39.44	46.27	-6.83	46.00	-6.56	100	31	QP
4	301.438	31.24	36.07	-4.83	46.00	-14.76	100	41	QP
5	550.567	33.50	34.41	-0.91	46.00	-12.50	100	236	QP
6	763.239	31.99	29.56	2.43	46.00	-14.01	200	38	QP

Spurious Emissions, TX Mode, 9k-30M




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

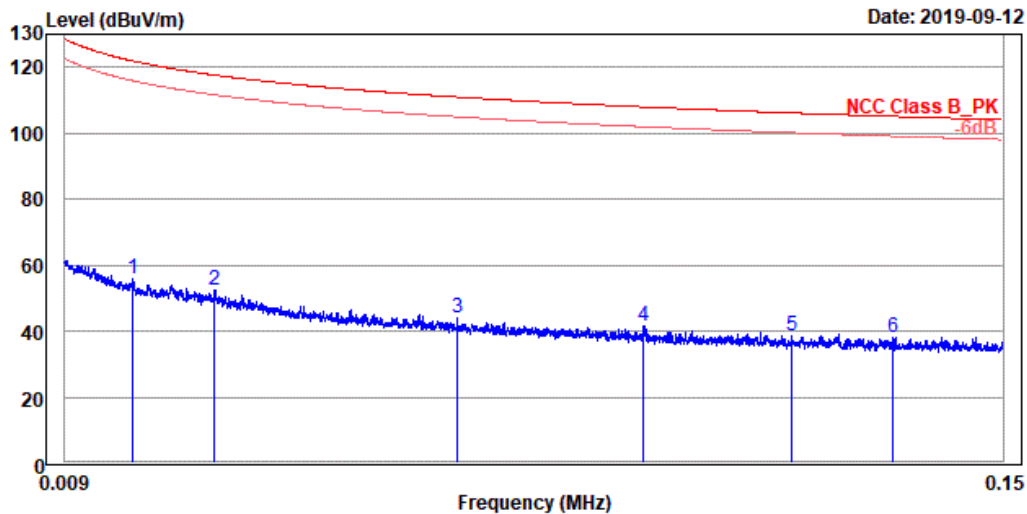

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.019	55.72	-17.30	73.02	121.90	-66.18	100	241	QP
2	0.032	52.53	-17.72	70.25	117.61	-65.08	100	174	QP
3	0.068	43.78	-18.83	62.61	110.94	-67.16	100	21	QP
4	0.096	41.42	-18.32	59.74	107.96	-66.54	100	107	QP
5	0.118	38.59	-19.60	58.19	106.14	-67.55	100	200	QP
6	0.133	38.16	-19.15	57.31	105.10	-66.94	100	0	QP

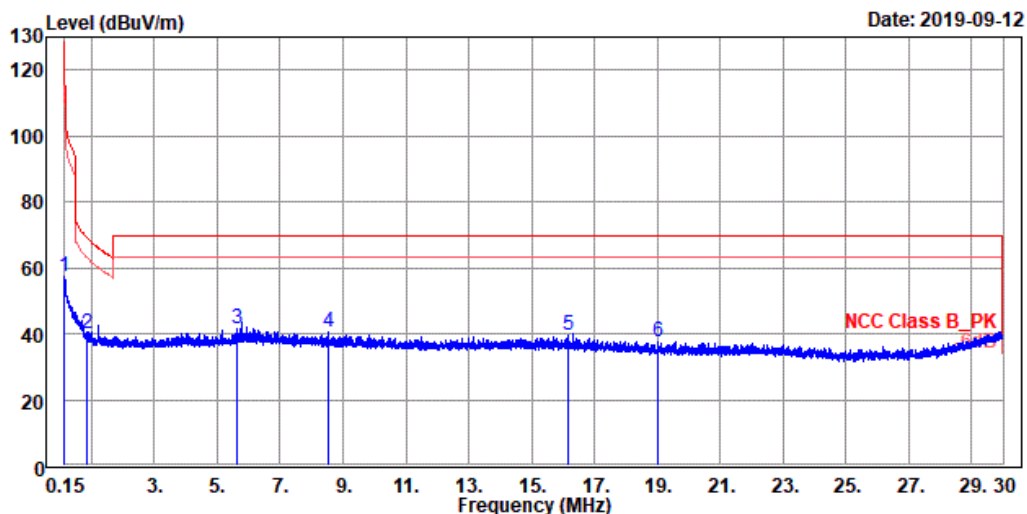


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_TX_2440MHz
Power setting: 4

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.150	57.30	0.95	56.35	104.08	-46.78	100	132	QP
2	0.832	39.93	-1.08	41.01	69.21	-29.28	100	225	QP
3	5.647	41.75	3.39	38.36	69.50	-27.75	100	198	QP
4	8.548	40.46	2.54	37.92	69.50	-29.04	100	107	QP
5	16.170	39.44	1.98	37.46	69.50	-30.06	100	77	QP
6	19.018	37.65	1.20	36.45	69.50	-31.85	100	31	QP

Spurious Emissions, RX Mode, 1-18G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

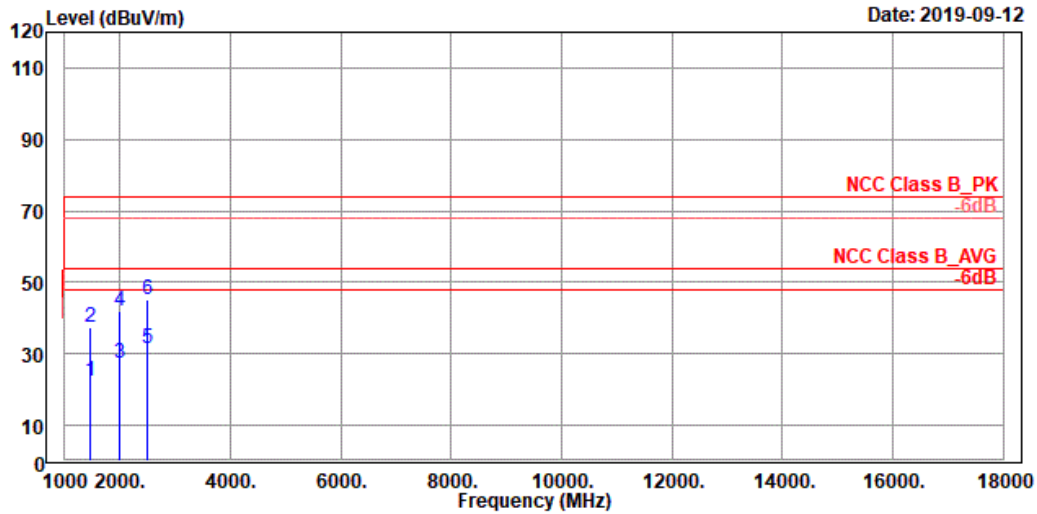

Site : 966_D
Condition : NCC Class B_PK 3m horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	1464.705	22.18	41.36	-19.18	54.00	-31.82	100	15	Average
2	1464.705	37.51	56.69	-19.18	74.00	-36.49	100	15	Peak
3	1994.583	27.28	42.36	-15.08	54.00	-26.72	200	228	Average
4	1994.583	42.20	57.28	-15.08	74.00	-31.80	200	228	Peak
5	2493.291	31.66	45.19	-13.53	54.00	-22.34	200	194	Average
6	2493.291	45.37	58.90	-13.53	74.00	-28.63	200	194	Peak

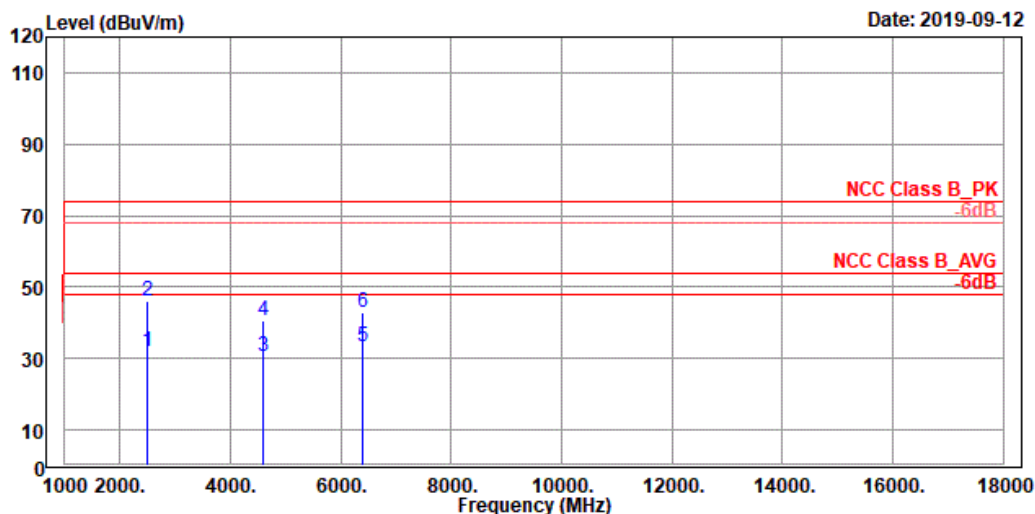


Site : 966_D
Condition : NCC Class B_PK 3m vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2497.542	31.73	45.26	-13.53	54.00	-22.27	200	193	Average
2	2497.542	46.08	59.61	-13.53	74.00	-27.92	200	193	Peak
3	4601.467	30.69	40.36	-9.67	54.00	-23.31	100	215	Average
4	4601.467	40.61	50.28	-9.67	74.00	-33.39	100	215	Peak
5	6406.451	33.30	40.69	-7.39	54.00	-20.70	100	189	Average
6	6406.451	42.83	50.22	-7.39	74.00	-31.17	100	189	Peak

Spurious Emissions, RX Mode, 18-26G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

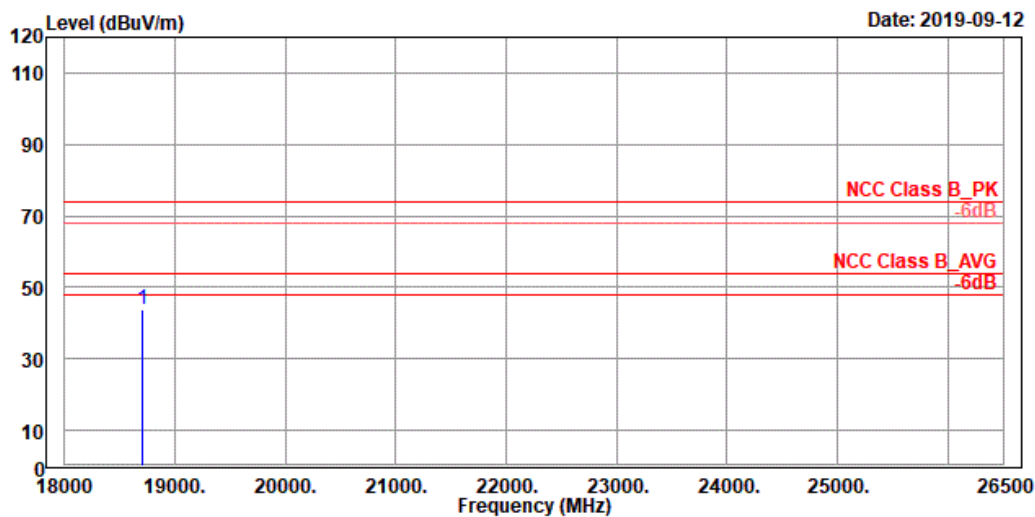

Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	18707.680	43.98	44.65	-0.67	74.00	-30.02	100	312	Peak

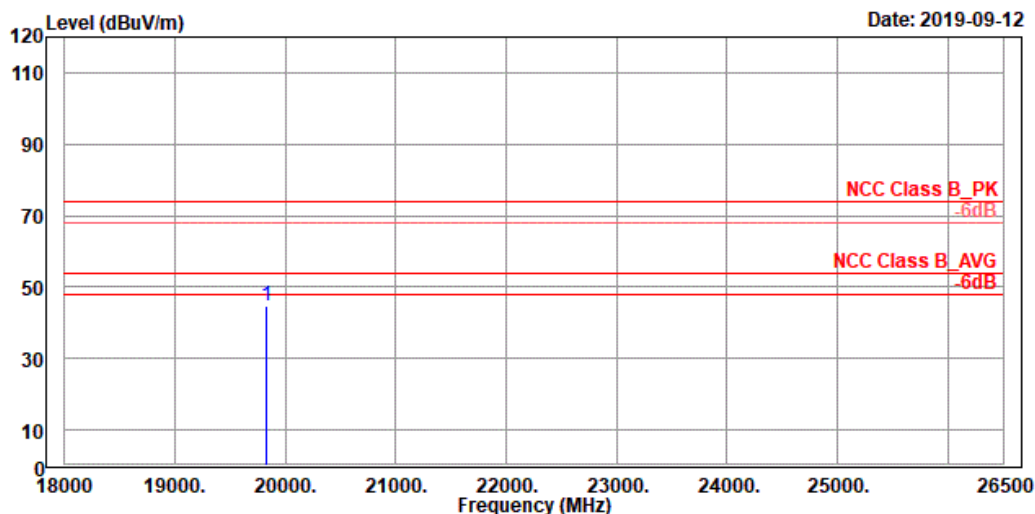


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz
Power setting: 0

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	19824.820	44.90	44.79	0.11	74.00	-29.10	100	213	Peak

Spurious Emissions, RX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

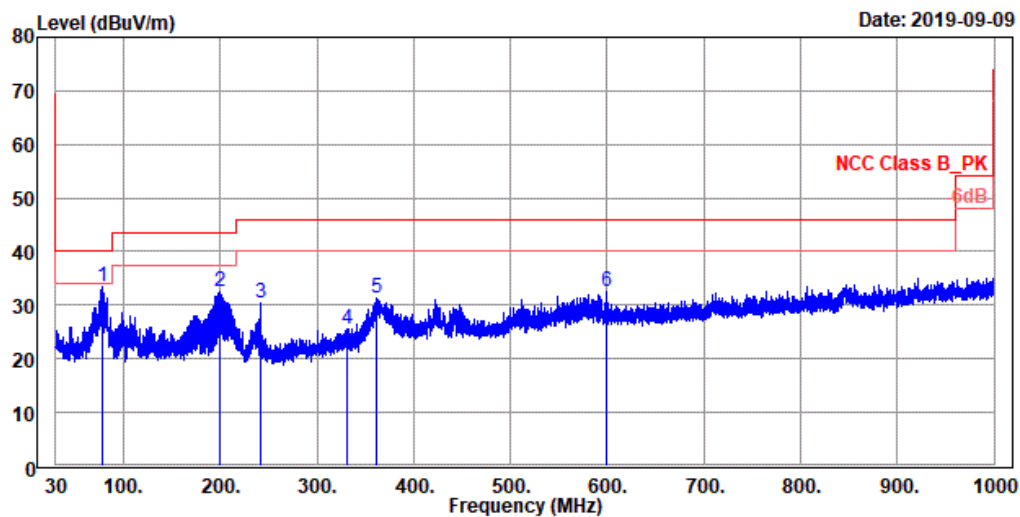

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read	Limit	Over	APos	TPos	Remark
	MHz	dBuV/m	Level	Factor	Line	Limit		
			dBuV	dB/m	dBuV/m	dB	cm	deg
1	77.368	33.31	43.61	-10.30	40.00	-6.69	100	250 QP
2	199.265	32.51	40.87	-8.36	43.50	-10.99	100	115 QP
3	241.137	30.50	37.33	-6.83	46.00	-15.50	200	65 QP
4	331.185	25.53	29.65	-4.12	46.00	-20.47	301	360 QP
5	361.659	31.32	35.22	-3.90	46.00	-14.68	200	0 QP
6	599.956	32.45	32.28	0.17	46.00	-13.55	126	360 QP

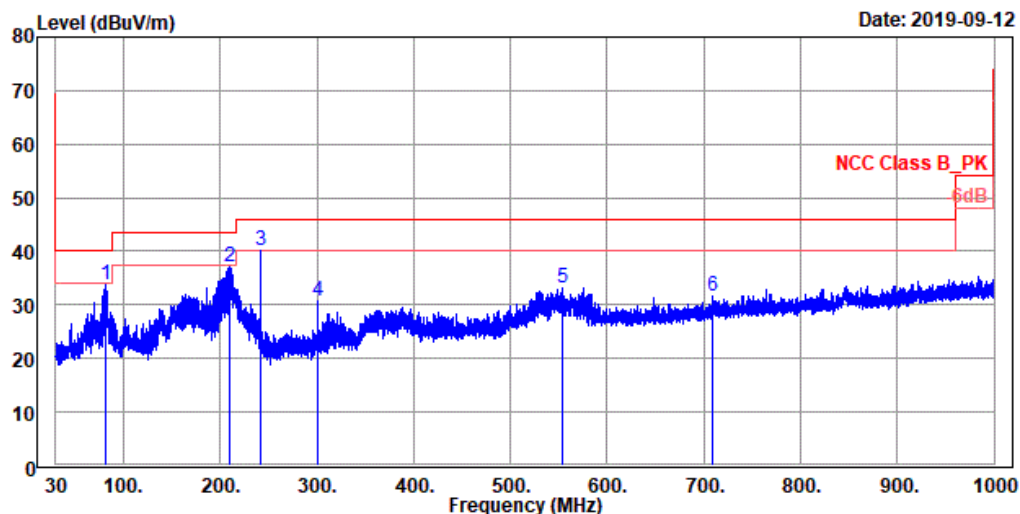


Site : 966_D
Condition : NCC Class B_PK 3m Horizontal
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	81.410	33.87	44.98	-11.11	40.00	-6.13	300	360	QP
2	209.612	37.12	45.43	-8.31	43.50	-6.38	100	219	QP
3	241.137	40.01	46.84	-6.83	46.00	-5.99	100	29	QP
4	301.438	30.83	35.66	-4.83	46.00	-15.17	100	42	QP
5	553.477	33.09	33.98	-0.89	46.00	-12.91	200	227	QP
6	709.243	31.60	30.17	1.43	46.00	-14.40	300	102	QP

Spurious Emissions, RX Mode, 9K-30M




TUV Rheinland Waiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

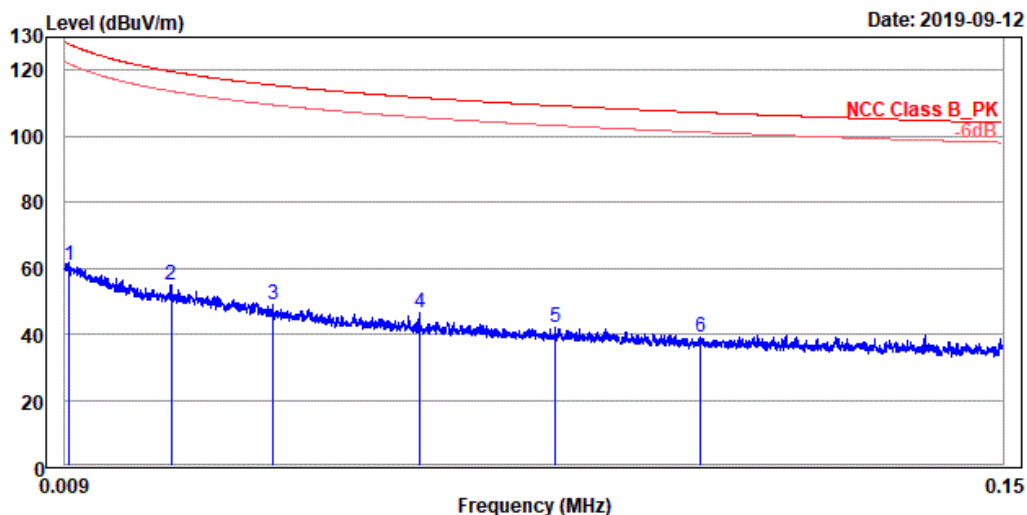

Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.010	60.65	-18.51	79.16	127.85	-67.20	100	312	QP
2	0.025	54.83	-16.82	71.65	119.65	-64.82	100	0	QP
3	0.040	48.96	-18.54	67.50	115.50	-66.54	100	1	QP
4	0.062	46.62	-16.73	63.35	111.70	-65.08	100	10	QP
5	0.083	41.89	-19.15	61.04	109.25	-67.36	100	3	QP
6	0.105	39.02	-19.96	58.98	107.21	-68.19	100	360	QP

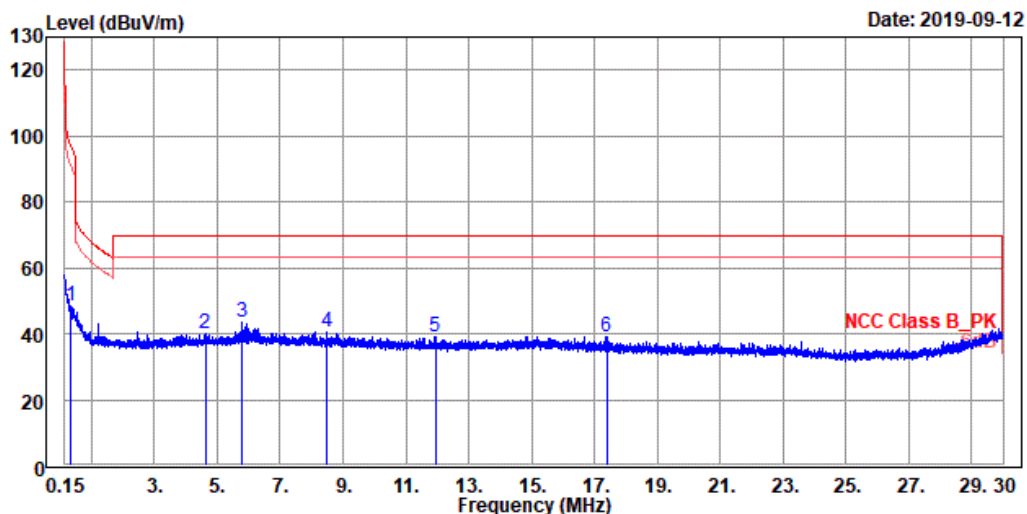


Site : 966_D
Condition : NCC Class B_PK 3m Vertical
Test Engineer: Kay Wu
Product : 自行車訓練台
Model NO : T8000D
Test Rating : 110V
Tmp/Hum : 23.5°C/67%
Mode : LE_RX_2440MHz

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.317	48.54	-1.57	50.11	97.59	-49.05	100	25	QP
2	4.615	39.80	1.46	38.34	69.50	-29.70	100	0	QP
3	5.794	43.59	5.23	38.36	69.50	-25.91	100	284	QP
4	8.466	40.59	2.65	37.94	69.50	-28.91	100	110	QP
5	11.936	39.28	1.99	37.29	69.50	-30.22	100	48	QP
6	17.386	39.16	2.14	37.02	69.50	-30.34	100	31	QP




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel: +886-2172-7000 Fax: +886-2528-0018

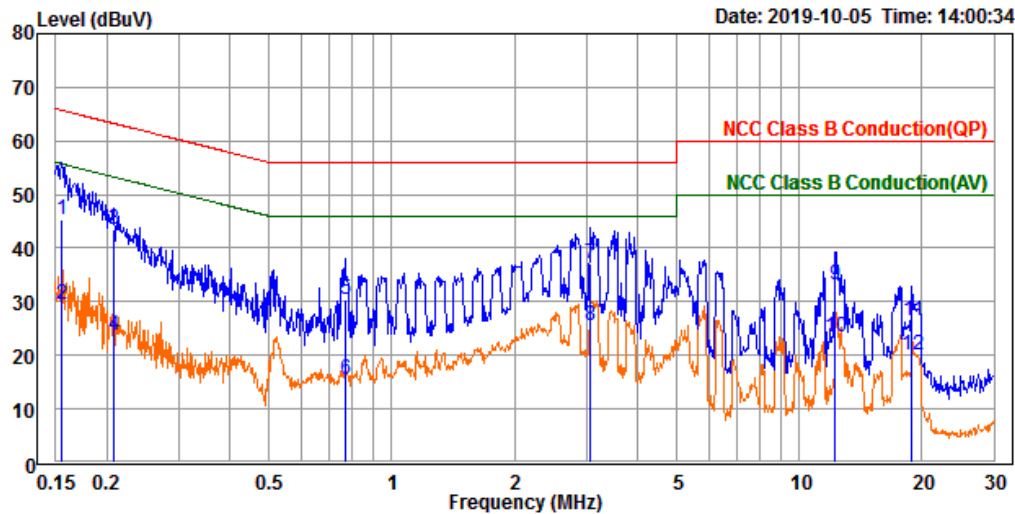

Trace: 1

Site : Conduction room
Condition : NCC Class B Conduction(QP) line1
Test Engineer: Amy Hsu
Product : 自行車訓練台
Model No. : T8000D
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.1°C / 35%
Mode : BLE TX 2402

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	35.83	9.61	45.44	65.75	-20.31	QP
2	0.155	19.95	9.61	29.56	55.75	-26.19	Average
3	0.207	33.90	9.61	43.51	63.31	-19.80	QP
4	0.207	14.22	9.61	23.83	53.31	-29.48	Average
5	0.769	20.66	9.62	30.28	56.00	-25.72	QP
6	0.769	5.84	9.62	15.46	46.00	-30.54	Average
7	3.060	27.45	9.65	37.10	56.00	-18.90	QP
8	3.060	16.03	9.65	25.68	46.00	-20.32	Average
9	12.232	23.48	9.75	33.23	60.00	-26.77	QP
10	12.232	13.68	9.75	23.43	50.00	-26.57	Average
11	18.872	16.72	9.79	26.51	60.00	-33.49	QP
12	18.872	10.16	9.79	19.95	50.00	-30.05	Average

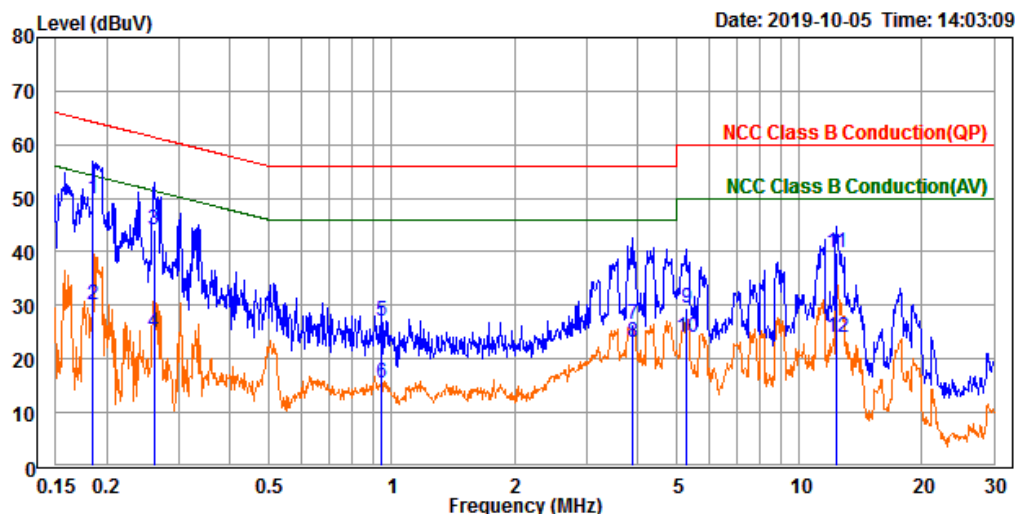

Trace: 1

Site : Conduction room
Condition : NCC Class B Conduction(QP) neutral
Test Engineer: Amy Hsu
Product : 自行車訓練台
Model No. : T8000D
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.1°C / 35%
Mode : BLE TX 2402

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.185	40.19	9.62	49.81	64.26	-14.45	QP
2	0.185	20.55	9.62	30.17	54.26	-24.09	Average
3	0.261	34.36	9.62	43.98	61.40	-17.42	QP
4	0.261	15.47	9.62	25.09	51.40	-26.31	Average
5	0.939	17.53	9.63	27.16	56.00	-28.84	QP
6	0.939	6.01	9.63	15.64	46.00	-30.36	Average
7	3.887	16.82	9.68	26.50	56.00	-29.50	QP
8	3.887	13.50	9.68	23.18	46.00	-22.82	Average
9	5.268	19.91	9.70	29.61	60.00	-30.39	QP
10	5.268	14.24	9.70	23.94	50.00	-26.06	Average
11	12.293	30.22	9.77	39.99	60.00	-20.01	QP
12	12.293	14.22	9.77	23.99	50.00	-26.01	Average