



Test Mode:	IEEE 802.11a - W53
------------	--------------------


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	34.53	32.69	34.64	dB	Limit ≥ 25 dB
	+20	32.40	33.41	32.72	dB	Limit ≥ 25 dB
	-40	40.02	40.02	40.06	dB	Limit ≥ 40 dB
	+40	40.62	40.78	40.69	dB	Limit ≥ 40 dB

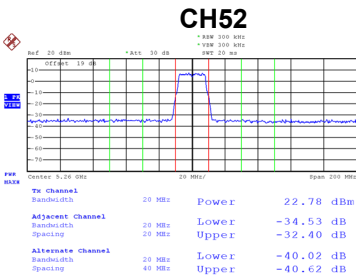

Date: 8.NOV.2025 11:27:15

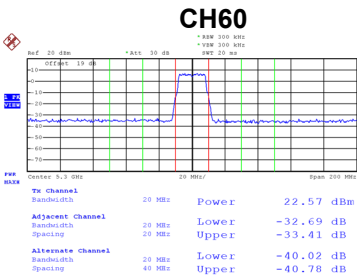


Date: 8.NOV.2025 11:34:04

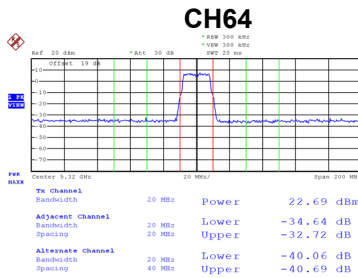


Date: 8.NOV.2025 11:36:12

Test Mode:	IEEE 802.11ac(VHT20) - W53
------------	----------------------------


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	32.89	31.04	33.10	dB	Limit ≥ 25 dB
	+20	32.15	32.54	31.00	dB	Limit ≥ 25 dB
	-40	49.46	48.97	49.18	dB	Limit ≥ 40 dB
	+40	49.95	49.78	49.67	dB	Limit ≥ 40 dB

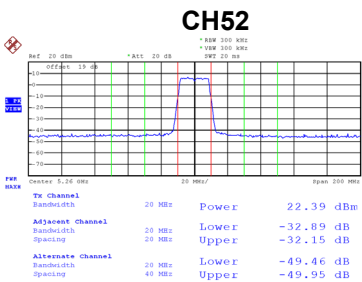

Date: 8.NOV.2025 13:36:11

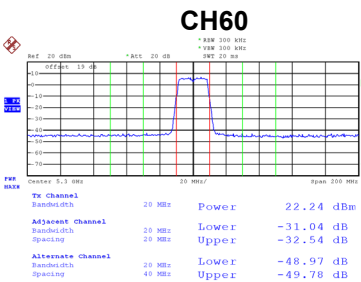



Date: 8.NOV.2025 13:41:06

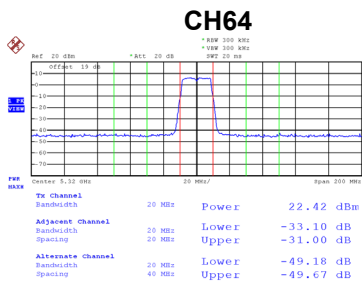

Date: 8.NOV.2025 13:43:54

Test Mode:	IEEE 802.11ac(VHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	42.56	43.90	dB	Limit ≥ 25 dB
	+40	40.59	42.22	dB	Limit ≥ 25 dB
	-80	47.98	47.01	dB	Limit ≥ 40 dB
	+80	48.03	47.32	dB	Limit ≥ 40 dB




Date: 8.NOV.2025 15:42:11

Date: 8.NOV.2025 15:45:45

Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------




Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	41.64	dB	Limit ≥ 25 dB
	+80	41.45	dB	Limit ≥ 25 dB

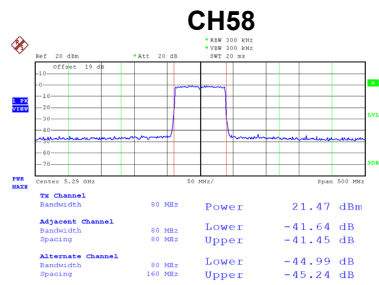

Date: 13.NOV.2025 10:35:57

Test Mode:	IEEE 802.11ax(HE20) - W53
------------	---------------------------

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	31.25	31.26	33.11	dB	Limit ≥ 25 dB
	+20	29.62	30.26	29.09	dB	Limit ≥ 25 dB
	-40	41.06	40.92	41.04	dB	Limit ≥ 40 dB
	+40	41.83	41.61	41.56	dB	Limit ≥ 40 dB

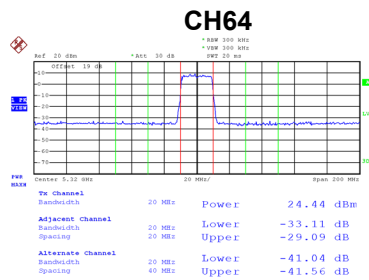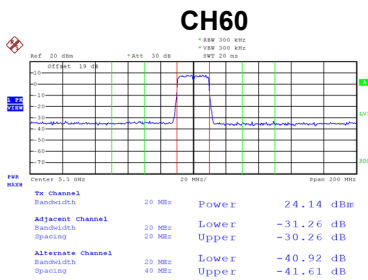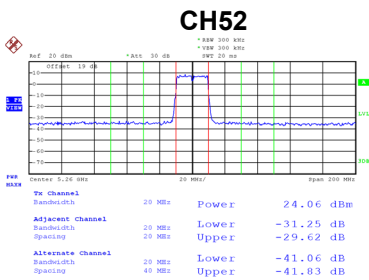



Date: 8.NOV.2025 14:23:40

Date: 8.NOV.2025 14:24:16

Date: 8.NOV.2025 14:38:27

Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	42.13	43.79	dB	Limit ≥ 25 dB
	+40	31.68	38.61	dB	Limit ≥ 25 dB
	-80	48.54	47.60	dB	Limit ≥ 40 dB
	+80	48.78	47.78	dB	Limit ≥ 40 dB

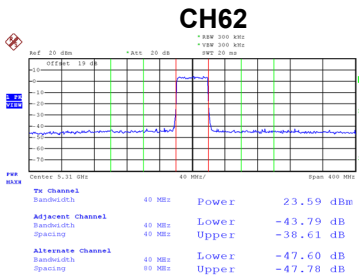


Date: 8.NOV.2025 16:13:01

Date: 8.NOV.2025 16:17:20

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------




Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	41.16	dB	Limit ≥ 25 dB
	+80	39.43	dB	Limit ≥ 25 dB

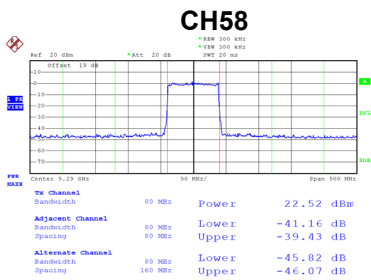

Date: 13.NOV.2025 10:49:16

Test Mode:	IEEE 802.11be(EHT20) - W53
------------	----------------------------

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.86	32.24	30.99	dB	Limit ≥ 25 dB
	+20	28.22	29.59	28.90	dB	Limit ≥ 25 dB
	-40	41.36	41.18	41.47	dB	Limit ≥ 40 dB
	+40	41.76	42.12	42.10	dB	Limit ≥ 40 dB

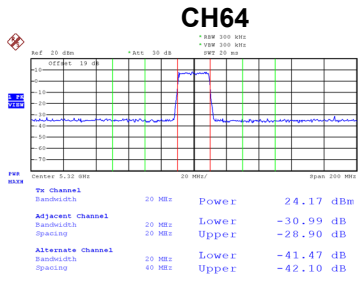



Date: 8.NOV.2025 15:07:23

Date: 8.NOV.2025 15:13:18

Date: 8.NOV.2025 15:16:14

Test Mode:	IEEE 802.11be(EHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	38.90	39.75	dB	Limit ≥ 25 dB
	+40	33.56	38.05	dB	Limit ≥ 25 dB
	-80	48.74	47.90	dB	Limit ≥ 40 dB
	+80	48.93	48.08	dB	Limit ≥ 40 dB

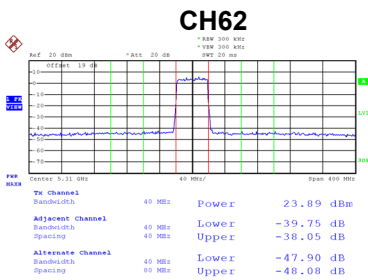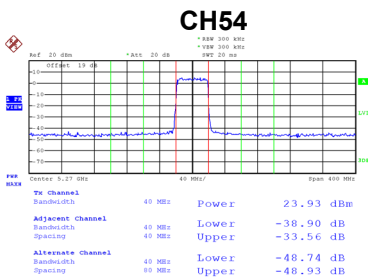


Date: 8.NOV.2025 16:40:51

Date: 8.NOV.2025 16:42:54

Test Mode:	IEEE 802.11be(EHT80) - W53
------------	----------------------------




Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	41.50	dB	Limit ≥ 25 dB
	+80	39.31	dB	Limit ≥ 25 dB

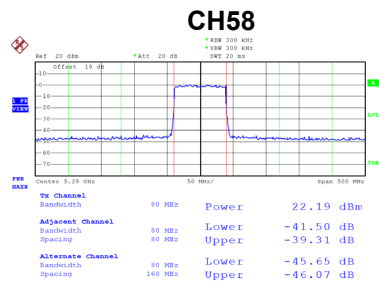

Date: 13.NOV.2025 11:06:06

Test Mode:	IEEE 802.11a - W56
------------	--------------------

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	33.23	33.39	32.73	dB	Limit ≥ 25 dB
	+20	32.21	32.67	32.32	dB	Limit ≥ 25 dB
	-40	46.50	47.12	46.37	dB	Limit ≥ 40 dB
	+40	47.35	46.57	46.76	dB	Limit ≥ 40 dB

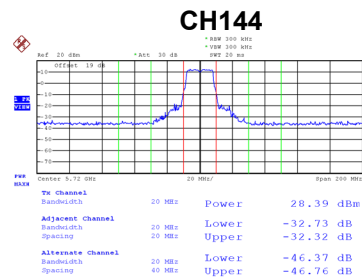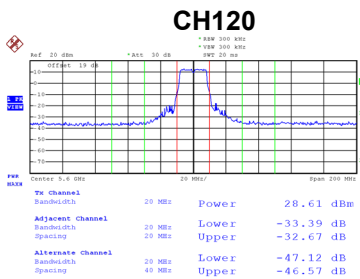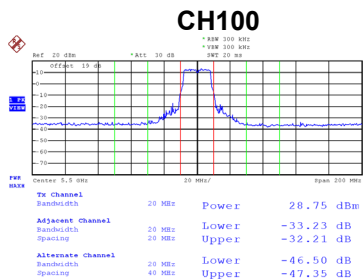




Date: 8.NOV.2025 11:39:41

Date: 8.NOV.2025 11:42:01

Date: 8.NOV.2025 11:44:42

Test Mode:	IEEE 802.11ac(VHT20) - W56
------------	----------------------------

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	32.80	31.90	32.85	dB	Limit ≥ 25 dB
	+20	30.95	31.63	31.51	dB	Limit ≥ 25 dB
	-40	46.61	47.32	46.44	dB	Limit ≥ 40 dB
	+40	47.32	46.82	46.86	dB	Limit ≥ 40 dB

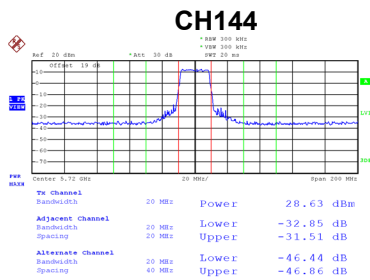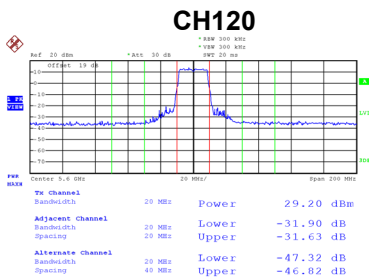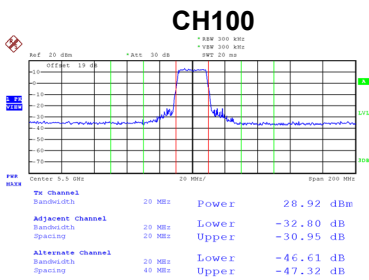




Date: 8.NOV.2025 13:47:51

Date: 8.NOV.2025 13:54:24

Date: 8.NOV.2025 14:00:53

Test Mode:	IEEE 802.11ac(VHT40) - W56
------------	----------------------------

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	38.80	38.23	37.97	dB	Limit ≥ 25 dB
	+40	38.96	38.73	37.46	dB	Limit ≥ 25 dB
	-80	43.79	44.65	44.29	dB	Limit ≥ 40 dB
	+80	44.12	43.97	44.56	dB	Limit ≥ 40 dB

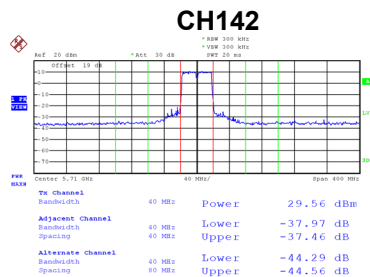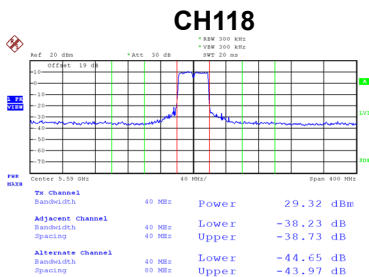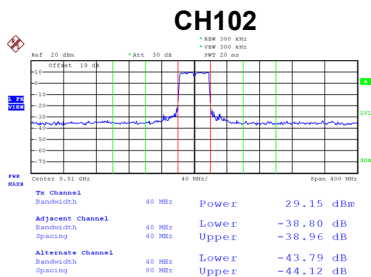


Date: 9.NOV.2025 15:48:33

Date: 9.NOV.2025 15:51:06


Date: 9.NOV.2025 15:57:14

Test Mode:	IEEE 802.11ac(VHT80) - W56
------------	----------------------------


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	38.84	38.80	38.99	dB	Limit ≥ 25 dB
Emitted Power	+80	38.78	38.20	38.84	dB	Limit ≥ 25 dB



Date: 13.NOV.2025 10:38:37






Date: 13.NOV.2025 10:41:00

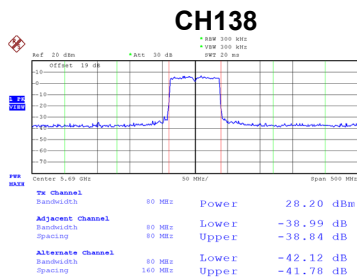

Date: 13.NOV.2025 10:43:44

Test Mode:	IEEE 802.11ax(HE20) - W56
------------	---------------------------

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	33.12	30.98	31.80	dB	Limit ≥ 25 dB
	+20	29.26	29.96	29.67	dB	Limit ≥ 25 dB
	-40	47.71	48.72	47.79	dB	Limit ≥ 40 dB
	+40	48.36	47.98	48.22	dB	Limit ≥ 40 dB

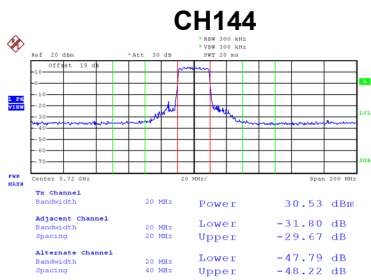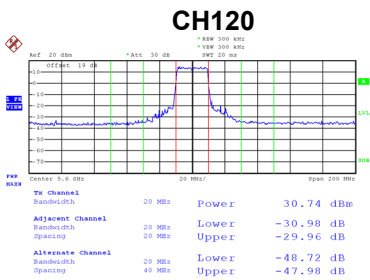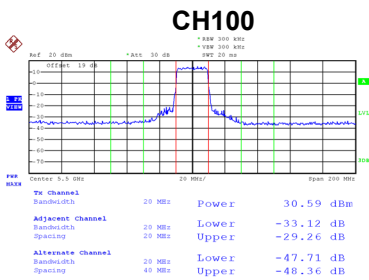




Date: 8.NOV.2025 14:43:08

Date: 8.NOV.2025 14:47:59

Date: 8.NOV.2025 14:50:45

Test Mode:	IEEE 802.11ax(HE40) - W56
------------	---------------------------

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	39.62	39.63	38.47	dB	Limit ≥ 25 dB
	+40	36.93	38.67	35.69	dB	Limit ≥ 25 dB
	-80	44.62	45.30	45.06	dB	Limit ≥ 40 dB
	+80	45.07	44.99	45.55	dB	Limit ≥ 40 dB

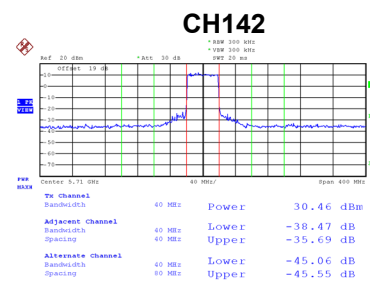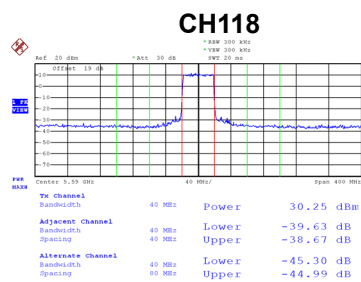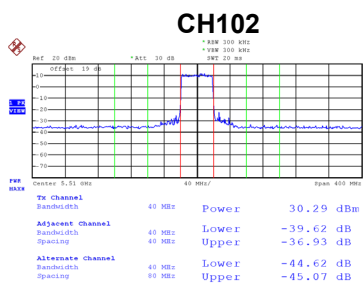


Date: 8.NOV.2025 16:22:07

Date: 8.NOV.2025 16:24:51


Date: 8.NOV.2025 16:27:20

Test Mode:	IEEE 802.11ax(HE80) - W56
------------	---------------------------


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	39.01	39.19	39.18	dB	Limit ≥ 25 dB
Emitted Power	+80	36.68	37.02	35.18	dB	Limit ≥ 25 dB



Date: 13.NOV.2025 10:52:18




Date: 13.NOV.2025 10:54:22




Date: 13.NOV.2025 11:00:07

Test Mode:	IEEE 802.11be(EHT20) - W56
------------	----------------------------


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	32.26	29.74	32.63	dB	Limit ≥ 25 dB
	+20	29.58	29.81	29.15	dB	Limit ≥ 25 dB
	-40	48.16	48.89	47.93	dB	Limit ≥ 40 dB
	+40	48.66	48.28	48.20	dB	Limit ≥ 40 dB

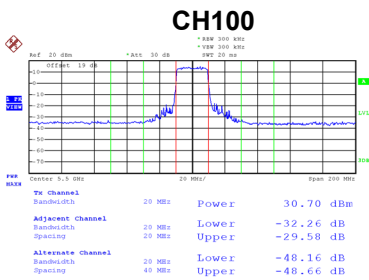

Date: 8.NOV.2025 15:21:12

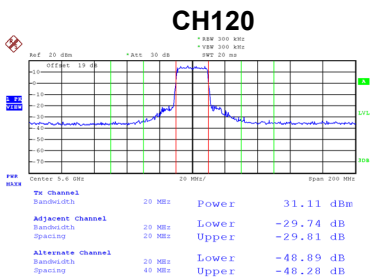




Date: 8.NOV.2025 15:23:56

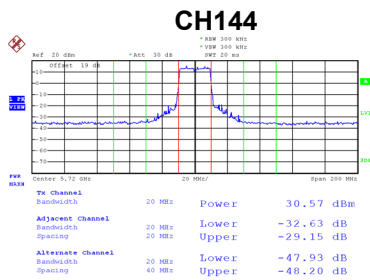

Date: 8.NOV.2025 15:27:09

Test Mode:	IEEE 802.11be(EHT40) - W56
------------	----------------------------

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	35.16	36.23	34.80	dB	Limit ≥ 25 dB
	+40	34.81	35.43	32.82	dB	Limit ≥ 25 dB
	-80	44.55	45.59	45.07	dB	Limit ≥ 40 dB
	+80	45.03	45.21	45.07	dB	Limit ≥ 40 dB

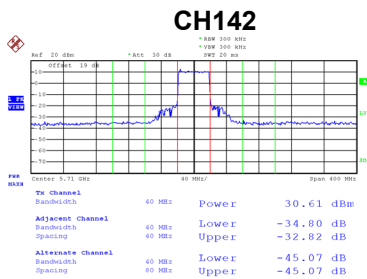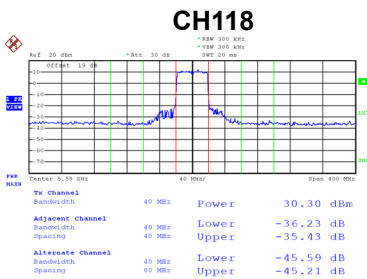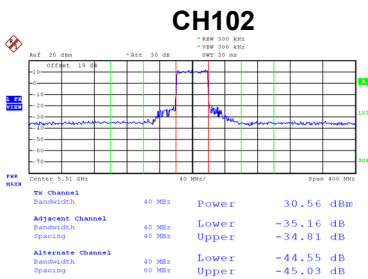


Date: 9.NOV.2025 16:45:38

Date: 9.NOV.2025 16:47:15


Date: 9.NOV.2025 16:49:03

Test Mode:	IEEE 802.11be(EHT80) - W56
------------	----------------------------


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	34.52	33.51	34.82	dB	Limit ≥ 25 dB
Emitted Power	+80	31.80	33.46	34.82	dB	Limit ≥ 25 dB

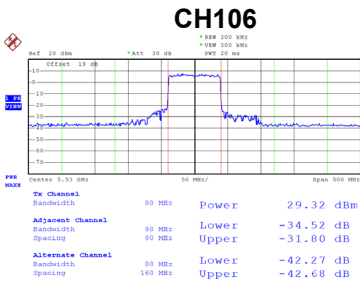

Date: 13.NOV.2025 11:08:36



Date: 13.NOV.2025 11:10:43



Date: 13.NOV.2025 11:13:45


APPENDIX F - LIMITATION OF COLLATERAL EMISSION OF RECEIVER

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	158.04	239.52	245.34	Limit ≤ 4 nW (-54 dBm)
	nW	0.0177	0.0139	0.0169	
	MHz	24800.00	24550.00	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.9638	0.8670	0.7925	


Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

CH36

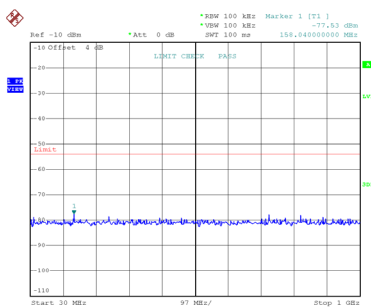


Date: 12.NOV.2025 13:53:19

CH40 f < 1GHz

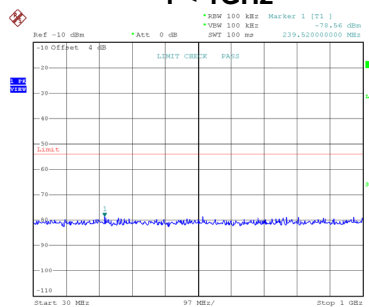


Date: 12.NOV.2025 13:57:34

CH48

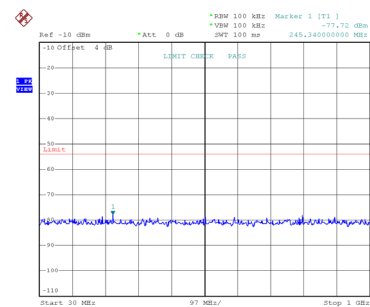


Date: 12.NOV.2025 13:58:11


f ≥ 1GHz

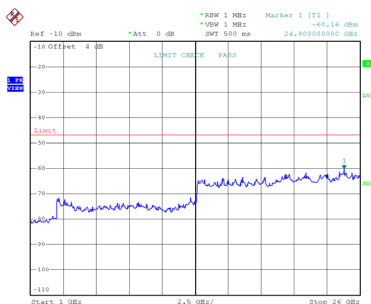

Date: 12.NOV.2025 13:53:50

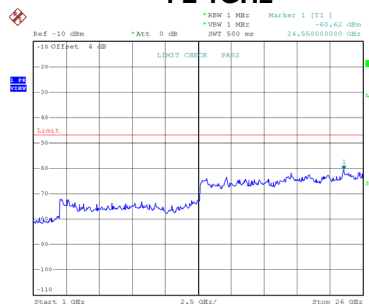

Date: 12.NOV.2025 13:57:45

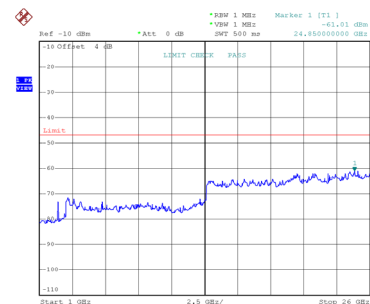

Date: 12.NOV.2025 13:58:22

Test Mode: IEEE 802.11ac(VHT20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	903.00	782.72	78.50	Limit ≤ 4 nW (-54 dBm)
	nW	0.0169	0.0165	0.0180	
	MHz	24850.00	24650.00	26000.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7079	0.7534	0.7834	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

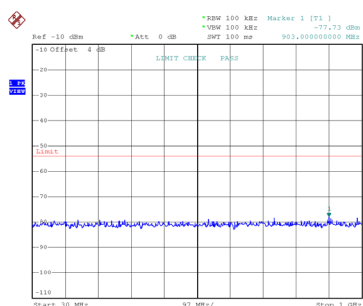


Date: 12.NOV.2025 14:07:19

CH40
f < 1GHz

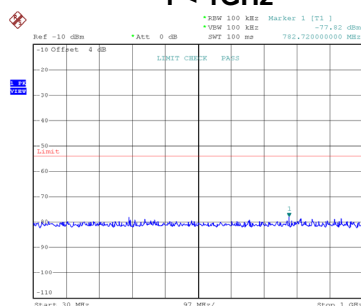


Date: 12.NOV.2025 14:08:20

CH48

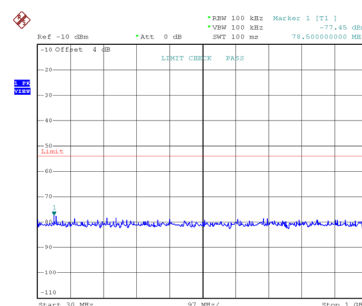


Date: 12.NOV.2025 14:09:32


f ≥ 1GHz

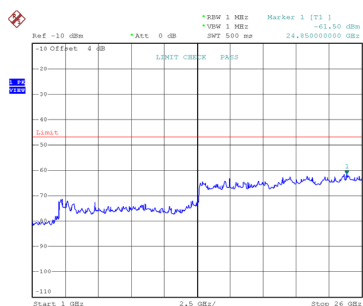

Date: 12.NOV.2025 14:07:29

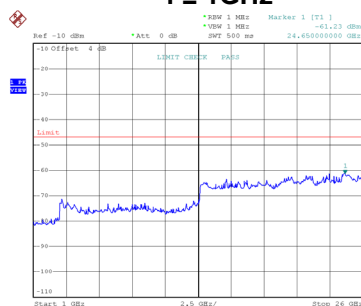

Date: 12.NOV.2025 14:08:31

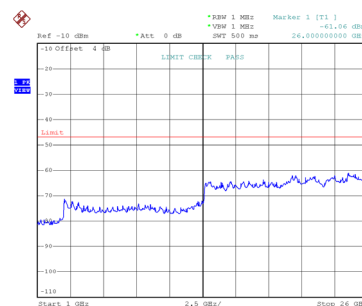


Date: 12.NOV.2025 14:09:43

Test Mode:	IEEE 802.11ac(VHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	212.36	970.90	Limit ≤ 4 nW (-54 dBm)
	nW	0.0151	0.0172	
	MHz	24550.00	24600.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8204	0.7079	


Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH38

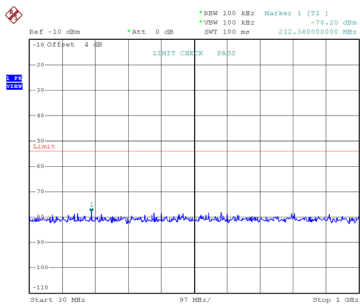


Date: 12.NOV.2025 14:25:11

CH46
f < 1GHz

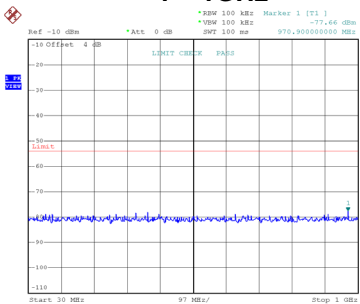


Date: 12.NOV.2025 14:26:57

f ≥ 1GHz

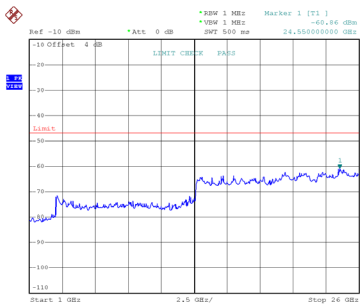

Date: 12.NOV.2025 14:25:41

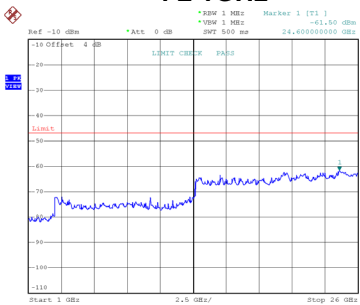


Date: 12.NOV.2025 14:27:07


Test Mode:	IEEE 802.11ac(VHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	511.12	Limit ≤ 4 nW (-54 dBm)
	nW	0.0139	
	MHz	24550.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7656	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

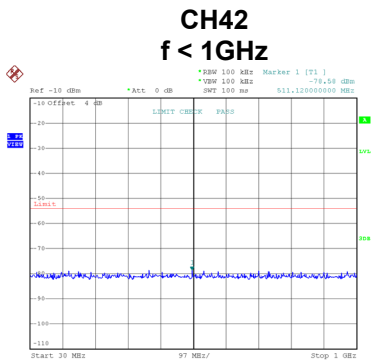

Date: 12.NOV.2025 14:37:20

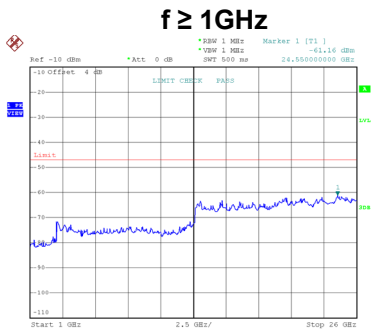

Date: 12.NOV.2025 14:37:31

Test Mode: IEEE 802.11ax(HE20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	724.52	835.10	569.32	Limit ≤ 4 nW (-54 dBm)
	nW	0.0168	0.0139	0.0157	
	MHz	24900.00	25050.00	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.9183	0.8260	0.7621	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

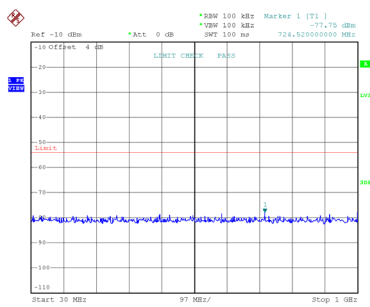


Date: 12.NOV.2025 14:15:57

CH40
f < 1GHz

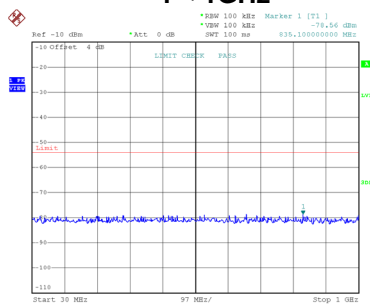


Date: 12.NOV.2025 14:16:52

CH48

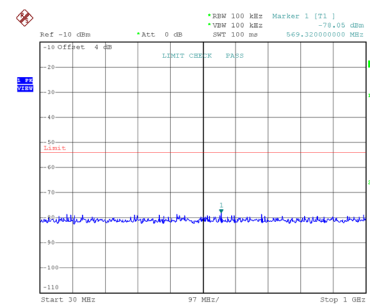


Date: 12.NOV.2025 14:17:15


f ≥ 1GHz

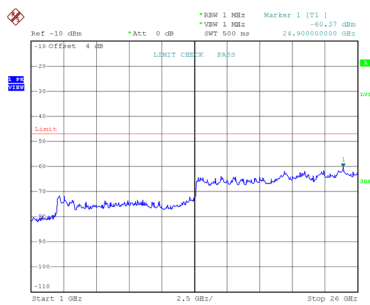

Date: 12.NOV.2025 14:16:07

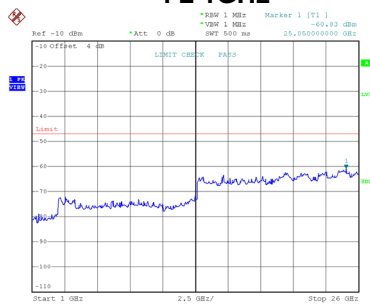

Date: 12.NOV.2025 14:17:02

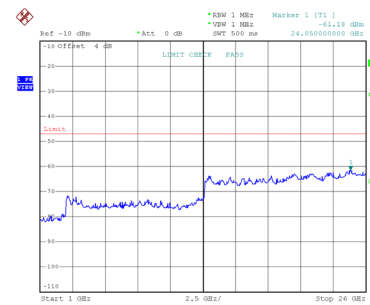

Date: 12.NOV.2025 14:17:25

Test Mode:	IEEE 802.11ax(HE40) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	679.90	136.70	Limit ≤ 4 nW (-54 dBm)
	nW	0.0153	0.0160	
	MHz	24800.00	25000.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8091	0.7568	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH38

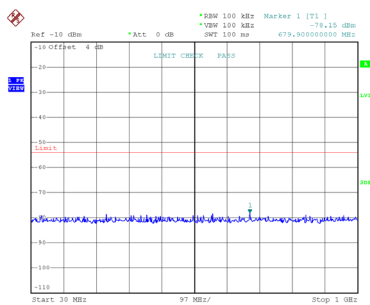


Date: 12.NOV.2025 14:31:38

CH46 f < 1GHz

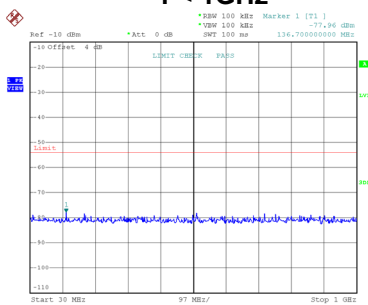


Date: 12.NOV.2025 14:33:38

f ≥ 1GHz

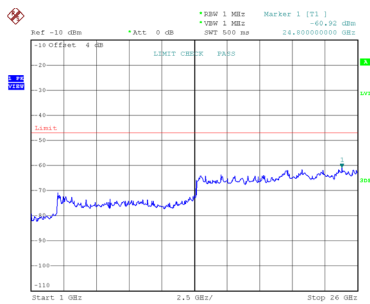

Date: 12.NOV.2025 14:31:48

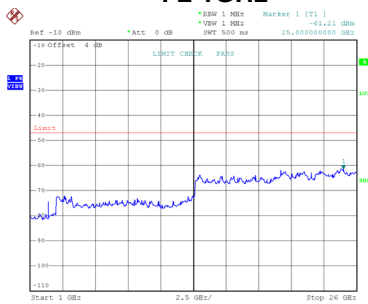


Date: 12.NOV.2025 14:33:48

Test Mode:	IEEE 802.11ax(HE80) - W52
------------	---------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	103.72	Limit ≤ 4 nW (-54 dBm)
	nW	0.0158	
	MHz	20600.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7447	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

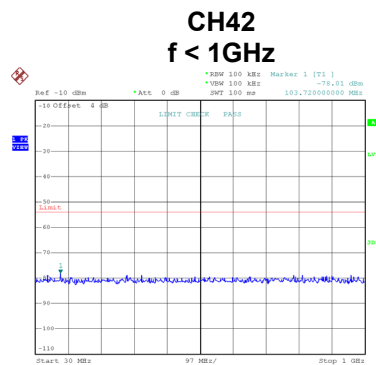

Date: 12.NOV.2025 14:42:59



Date: 12.NOV.2025 14:43:09

Test Mode: IEEE 802.11be(EHT20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	154.16	759.44	619.76	Limit ≤ 4 nW (-54 dBm)
	nW	0.0159	0.0145	0.0136	
	MHz	24650.00	24500.00	20600.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7499	0.9247	0.7621	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

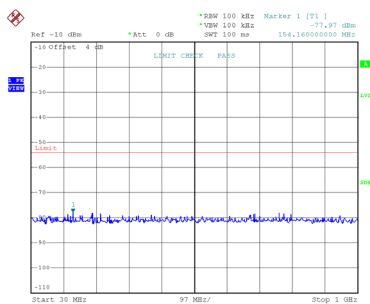


Date: 12.NOV.2025 15:12:48

CH40
f < 1GHz

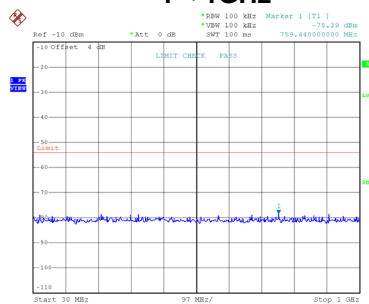


Date: 12.NOV.2025 15:14:58

CH48

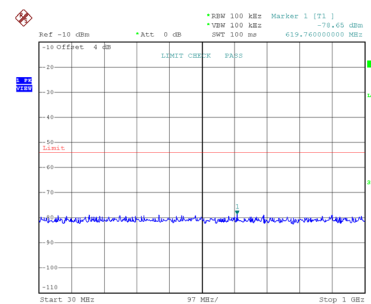


Date: 12.NOV.2025 15:15:30


f ≥ 1GHz

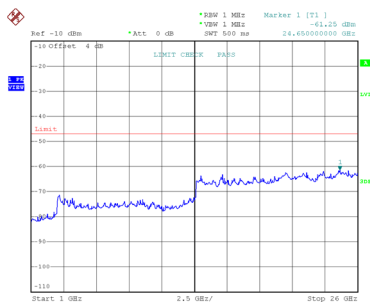

Date: 12.NOV.2025 15:12:57

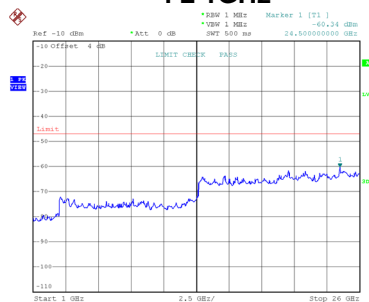

Date: 12.NOV.2025 15:15:07

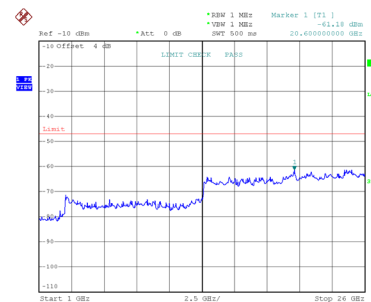

Date: 12.NOV.2025 15:15:40

Test Mode:	IEEE 802.11be(EHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	51.34	495.60	Limit ≤ 4 nW (-54 dBm)
	nW	0.0140	0.0158	
	MHz	24900.00	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7889	0.7112	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH38

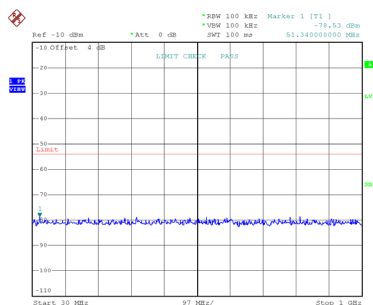


Date: 12.NOV.2025 14:54:10

CH46 f < 1GHz

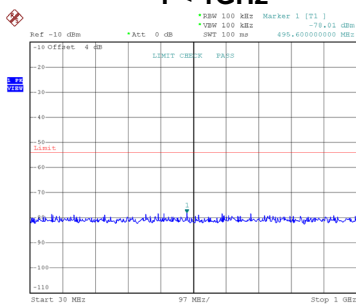


Date: 12.NOV.2025 14:54:54

f ≥ 1GHz

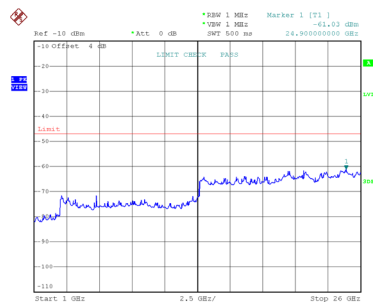

Date: 12.NOV.2025 14:54:19

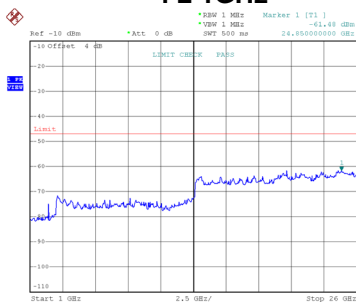


Date: 12.NOV.2025 14:55:02


Test Mode:	IEEE 802.11be(EHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	606.18	Limit ≤ 4 nW (-54 dBm)
	nW	0.0152	
	MHz	24950.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.9290	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

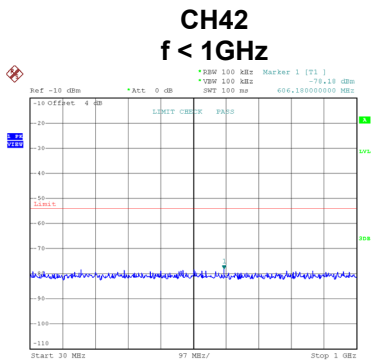

Date: 12.NOV.2025 14:51:24

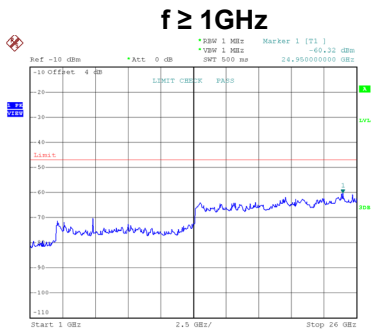


Date: 12.NOV.2025 14:51:33

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	679.90	344.28	600.36	Limit ≤ 4 nW (-54 dBm)
	nW	0.0145	0.0135	0.0164	
	MHz	24500.00	24800.00	24800.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8279	0.8017	0.7603	


Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH52

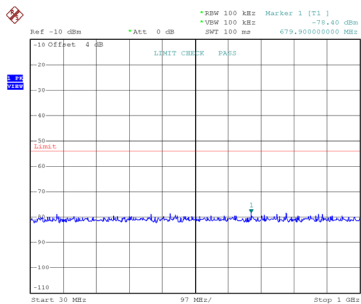


Date: 12.NOV.2025 13:58:48

CH60
f < 1GHz

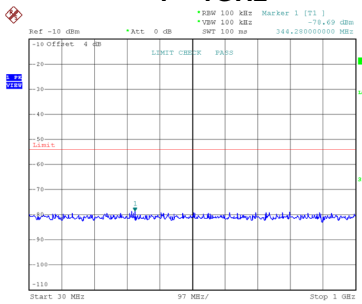


Date: 12.NOV.2025 14:00:50

CH64

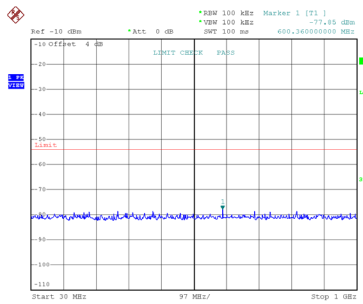


Date: 12.NOV.2025 14:02:16


f ≥ 1GHz

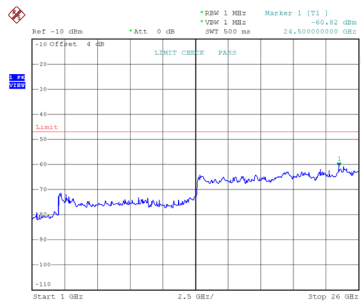

Date: 12.NOV.2025 13:58:58

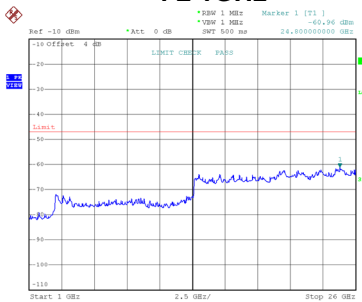

Date: 12.NOV.2025 14:01:00

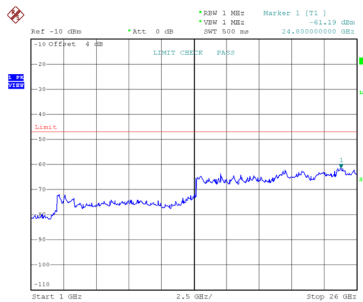

Date: 12.NOV.2025 14:02:27

Test Mode: IEEE 802.11ac(VHT20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	41.64	974.78	165.80	Limit ≤ 4 nW (-54 dBm)
	nW	0.0138	0.0178	0.0144	
	MHz	24600.00	22000.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8750	0.7499	0.8472	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH52

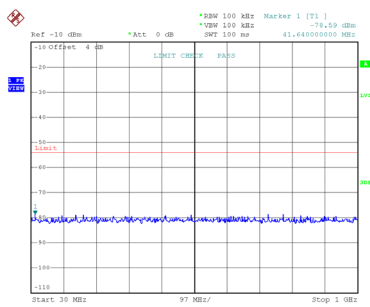


Date: 12.NOV.2025 14:11:17

CH60
f < 1GHz

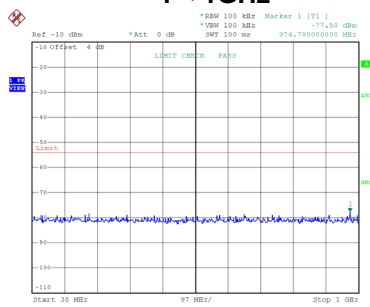


Date: 12.NOV.2025 14:11:38

CH64

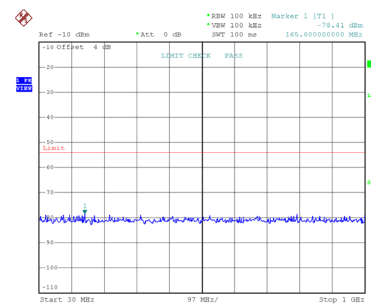


Date: 12.NOV.2025 14:12:19


f ≥ 1GHz

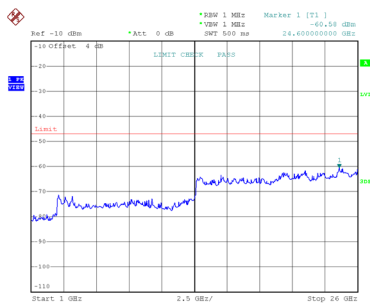

Date: 12.NOV.2025 14:11:27

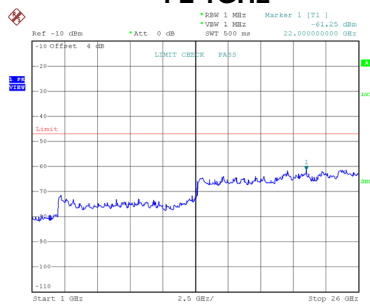

Date: 12.NOV.2025 14:11:49

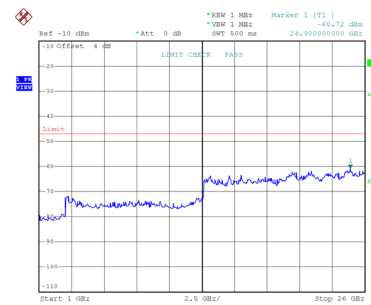


Date: 12.NOV.2025 14:12:29

Test Mode:	IEEE 802.11ac(VHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	860.32	549.92	Limit ≤ 4 nW (-54 dBm)
	nW	0.0145	0.0147	
	MHz	25000.00	24700.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8185	0.7211	


Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH54

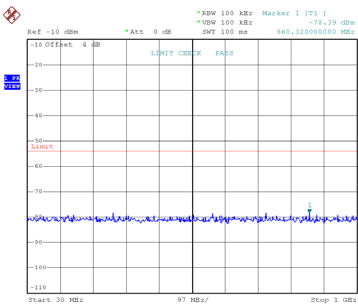


Date: 12.NOV.2025 14:27:19

CH62 f < 1GHz

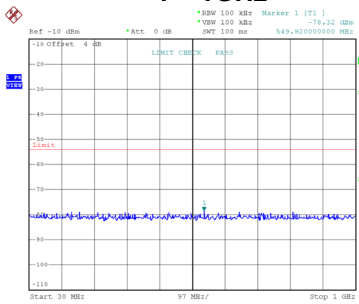


Date: 12.NOV.2025 14:28:25

f ≥ 1GHz



Date: 12.NOV.2025 14:28:09

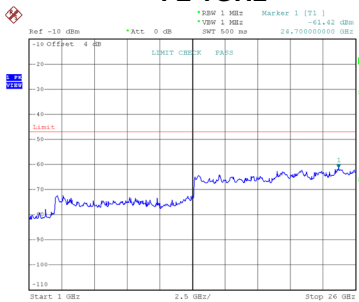


Date: 12.NOV.2025 14:28:35


Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	904.94	Limit ≤ 4 nW (-54 dBm)
	nW	0.0138	
	MHz	24450.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8851	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

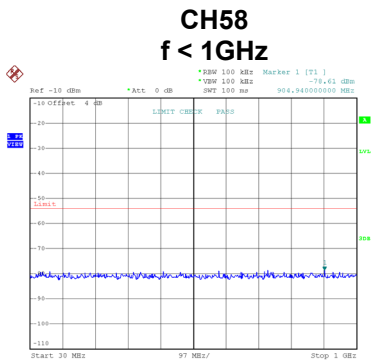

Date: 12.NOV.2025 14:37:44

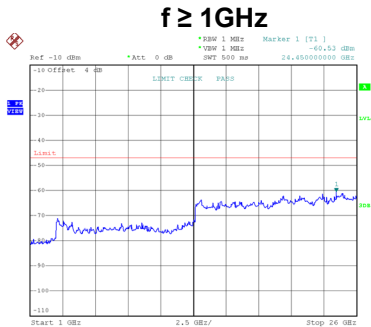

Date: 12.NOV.2025 14:37:54

Test Mode: IEEE 802.11ax(HE20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	935.98	980.60	185.20	Limit ≤ 4 nW (-54 dBm)
	nW	0.0143	0.0154	0.0166	
	MHz	24550.00	24850.00	24650.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.9141	0.6486	0.7379	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH52

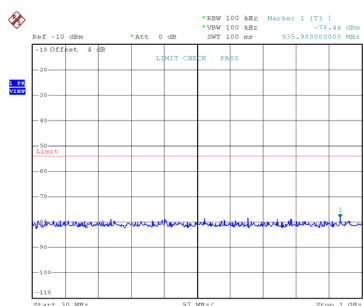


Date: 12.NOV.2025 14:17:45

CH60
f < 1GHz

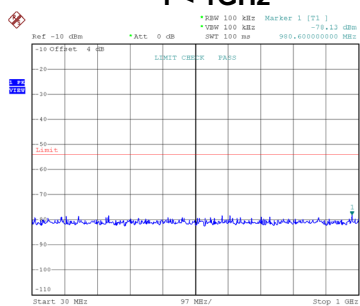


Date: 12.NOV.2025 14:20:45

CH64

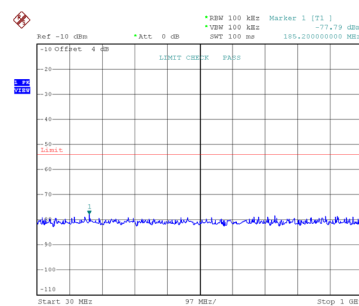


Date: 12.NOV.2025 14:23:43


f ≥ 1GHz

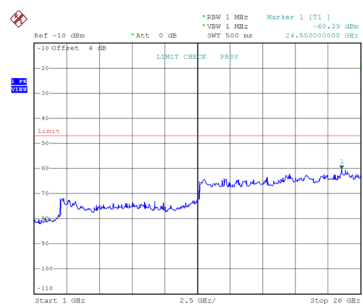

Date: 12.NOV.2025 14:17:56

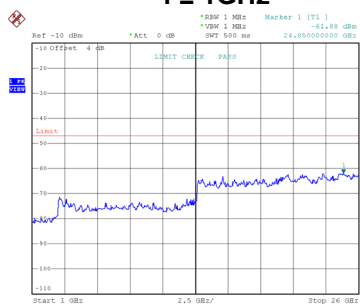

Date: 12.NOV.2025 14:20:55

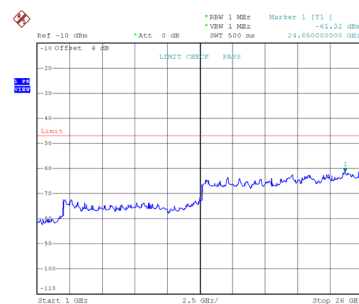

Date: 12.NOV.2025 14:23:53

Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	88.20	957.32	Limit ≤ 4 nW (-54 dBm)
	nW	0.0153	0.0134	
	MHz	25000.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7998	0.8128	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH54

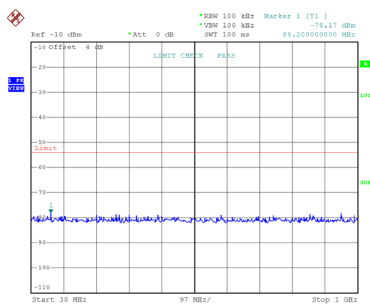


Date: 12.NOV.2025 14:34:01

CH62 f < 1GHz

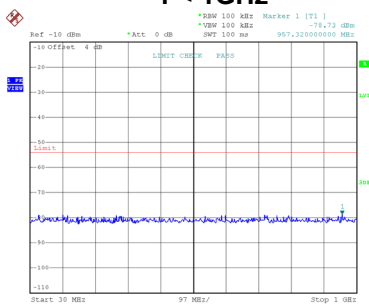


Date: 12.NOV.2025 14:34:23

f ≥ 1GHz

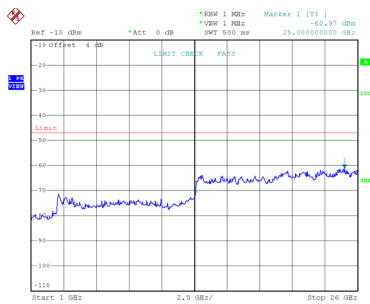

Date: 12.NOV.2025 14:34:11

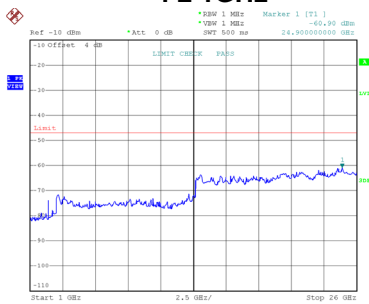

Date: 12.NOV.2025 14:34:34

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	949.56	Limit ≤ 4 nW (-54 dBm)
	nW	0.0151	
	MHz	24550.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8279	

Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

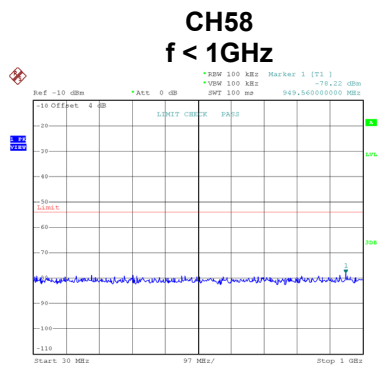

Date: 12.NOV.2025 14:44:38



Date: 12.NOV.2025 14:44:48

Test Mode: IEEE 802.11be(EHT20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	755.56	452.92	592.60	Limit ≤ 4 nW (-54 dBm)
	nW	0.0148	0.0158	0.0141	
	MHz	24600.00	24450.00	24500.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7516	0.8299	0.8035	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH52

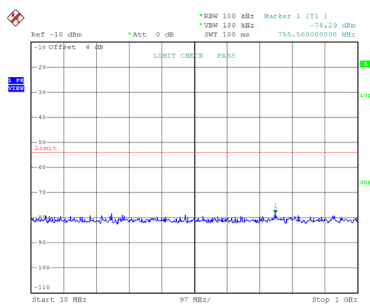


Date: 12.NOV.2025 15:15:52

CH60
f < 1GHz

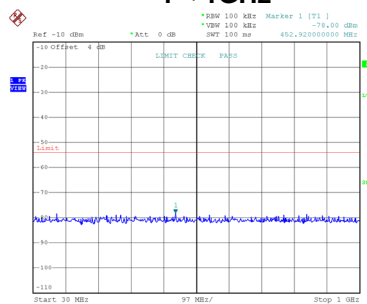


Date: 12.NOV.2025 15:16:34

CH64

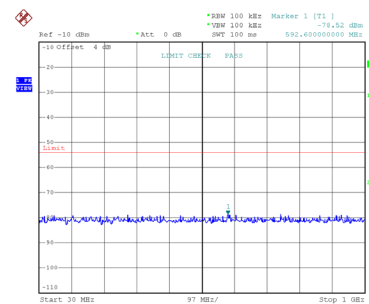


Date: 12.NOV.2025 15:17:02


f ≥ 1GHz

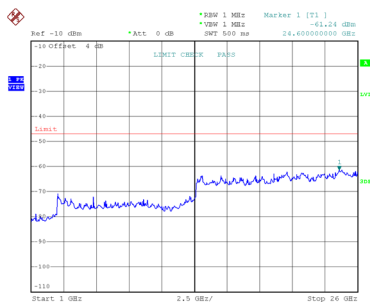

Date: 12.NOV.2025 15:16:02

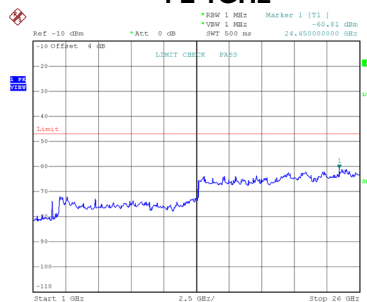

Date: 12.NOV.2025 15:16:44

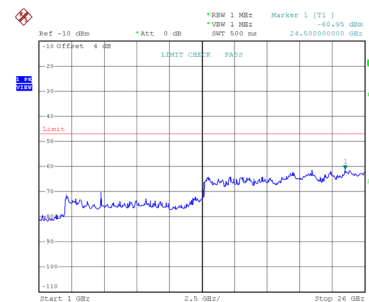

Date: 12.NOV.2025 15:17:12

Test Mode:	IEEE 802.11be(EHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	299.66	103.72	Limit ≤ 4 nW (-54 dBm)
	nW	0.0164	0.0150	
	MHz	25050.00	23250.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7638	0.7852	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH54

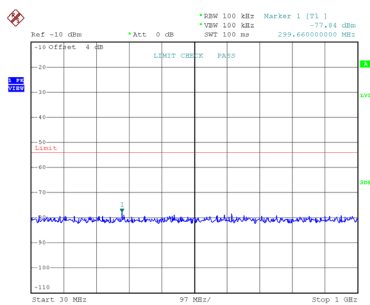


Date: 12.NOV.2025 14:55:21

CH62 f < 1GHz

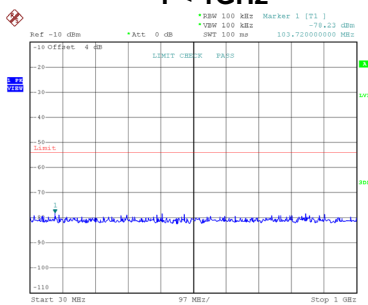


Date: 12.NOV.2025 14:55:42

f ≥ 1GHz

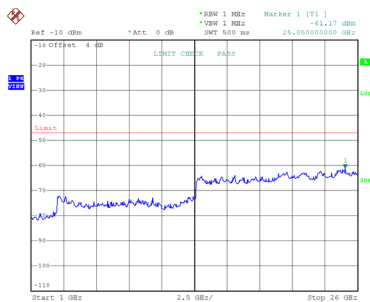

Date: 12.NOV.2025 14:55:30

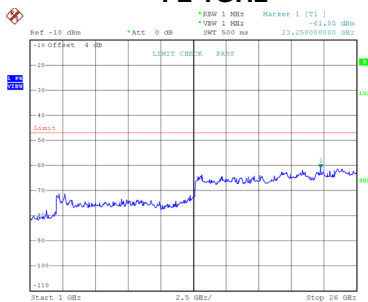


Date: 12.NOV.2025 14:55:50


Test Mode:	IEEE 802.11be(EHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	608.12	Limit ≤ 4 nW (-54 dBm)
	nW	0.0164	
	MHz	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7413	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

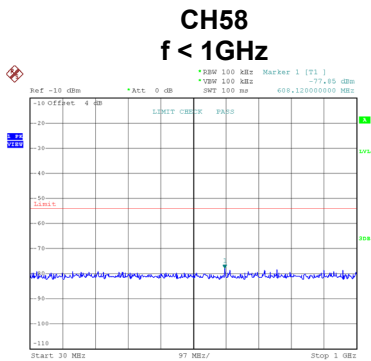

Date: 12.NOV.2025 14:51:49

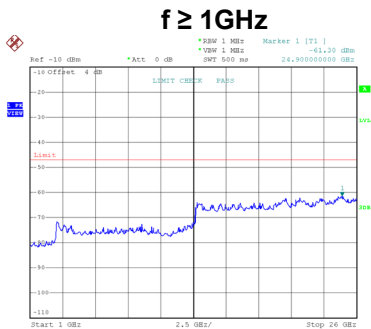


Date: 12.NOV.2025 14:51:50


Test Mode:	IEEE 802.11ac(VHT160) - W52+W53
------------	---------------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	392.78	Limit ≤ 4 nW (-54 dBm)
	nW	0.0160	
	MHz	26000.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8650	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

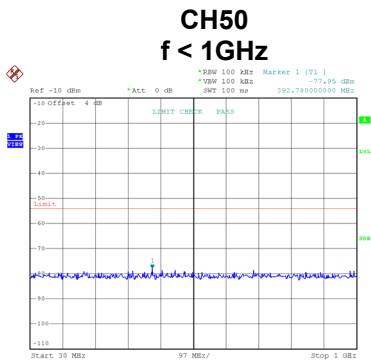

Date: 12.NOV.2025 14:46:42

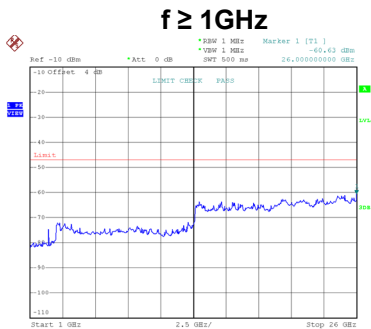


Date: 12.NOV.2025 14:46:51


Test Mode:	IEEE 802.11ax(HE160) - W52+W53
------------	--------------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	470.38	Limit ≤ 4 nW (-54 dBm)
	nW	0.0199	
	MHz	24600.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7709	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

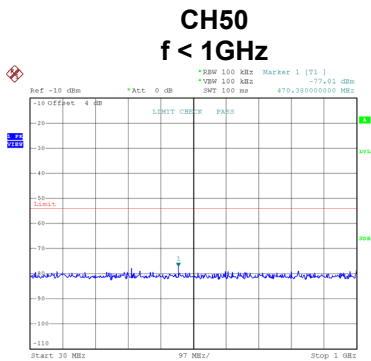

Date: 12.NOV.2025 14:47:59

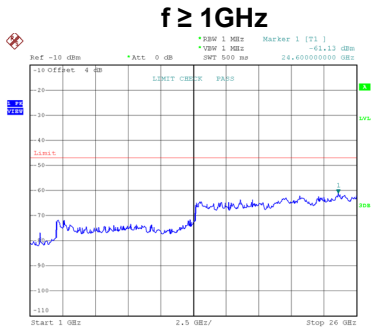

Date: 12.NOV.2025 14:48:08

Test Mode:	IEEE 802.11be(EHT160) - W52+W53
------------	---------------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	943.74	Limit ≤ 4 nW (-54 dBm)
	nW	0.0171	
	MHz	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.6683	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

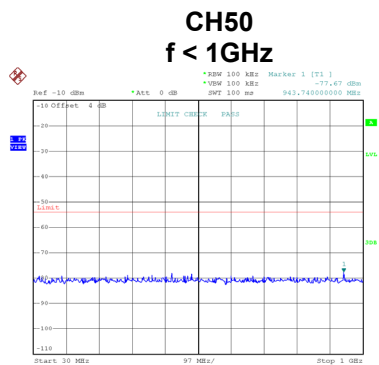

Date: 12.NOV.2025 14:49:09

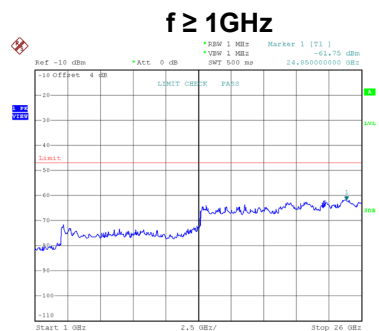

Date: 12.NOV.2025 14:49:10

Test Mode:	IEEE 802.11a - W56
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	937.92	319.06	177.44	Limit ≤ 4 nW (-54 dBm)
	nW	0.0147	0.0141	0.0147	
	MHz	25900.00	24450.00	21900.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.9226	0.7621	0.7015	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH100

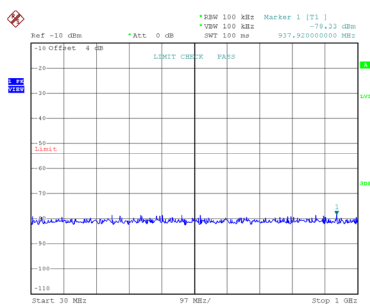


Date: 12.NOV.2025 14:02:38

CH120
f < 1GHz

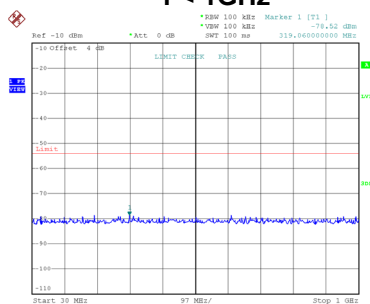


Date: 12.NOV.2025 14:03:28

CH144

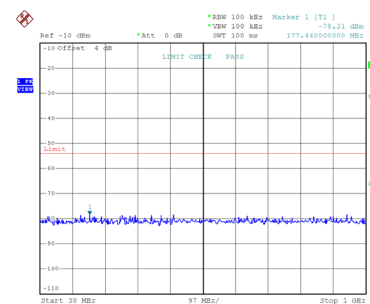


Date: 12.NOV.2025 14:03:54


f ≥ 1GHz

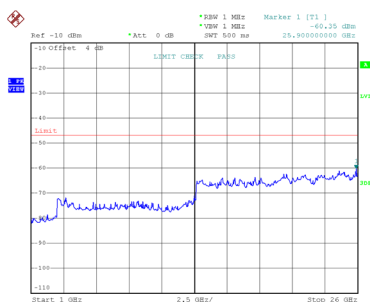

Date: 12.NOV.2025 14:02:49

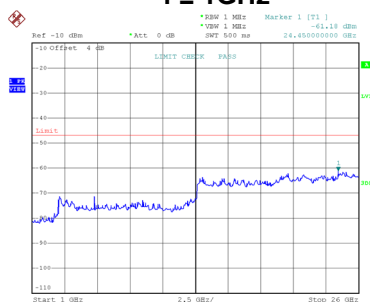

Date: 12.NOV.2025 14:03:39

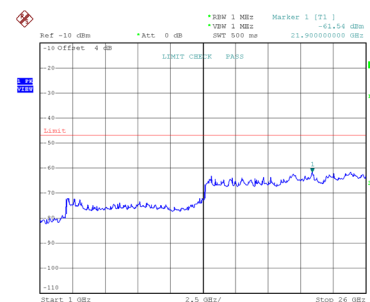

Date: 12.NOV.2025 14:04:04

Test Mode: IEEE 802.11ac(VHT20) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	976.72	297.72	972.84	Limit ≤ 4 nW (-54 dBm)
	nW	0.0132	0.0155	0.0157	
	MHz	24550.00	24600.00	24800.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.6699	0.8375	0.7464	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH100

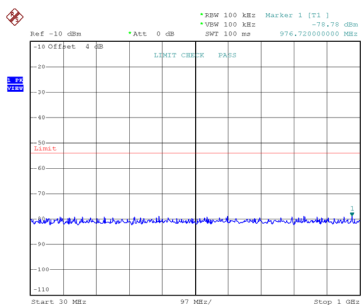


Date: 12.NOV.2025 14:12:57

CH120
f < 1GHz

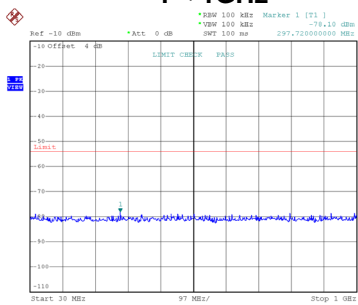


Date: 12.NOV.2025 14:13:44

CH144

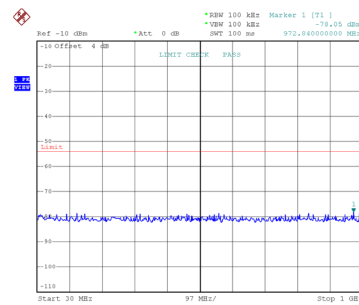


Date: 12.NOV.2025 14:14:20


f ≥ 1GHz

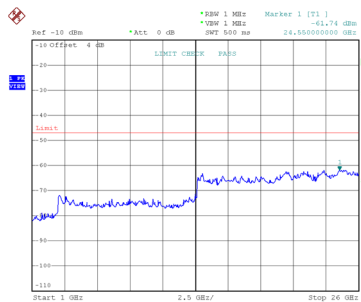

Date: 12.NOV.2025 14:13:07



Date: 12.NOV.2025 14:13:54

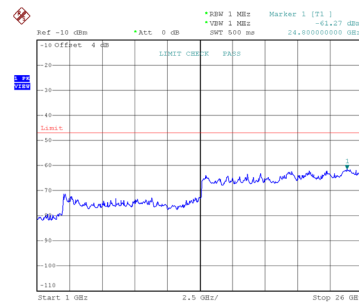

Date: 12.NOV.2025 14:14:30

Test Mode: IEEE 802.11ac(VHT40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	175.50	600.36	778.84	Limit ≤ 4 nW (-54 dBm)
	nW	0.0131	0.0150	0.0189	
	MHz	24800.00	25050.00	24950.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.6668	0.8954	0.7516	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH102

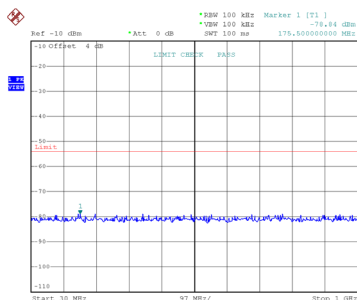


Date: 12.NOV.2025 14:29:30

CH118
f < 1GHz




Date: 12.NOV.2025 14:30:43

CH142




Date: 12.NOV.2025 14:31:06


f ≥ 1GHz

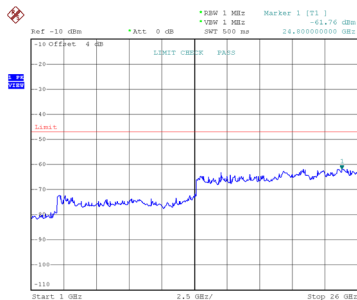

Date: 12.NOV.2025 14:29:41



Date: 12.NOV.2025 14:30:53



Date: 12.NOV.2025 14:31:16

Test Mode: IEEE 802.11ac(VHT80) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	472.32	776.90	767.20	Limit ≤ 4 nW (-54 dBm)
	nW	0.0142	0.0143	0.0173	
	MHz	24550.00	24900.00	25050.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.9226	0.8318	0.7079	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH106

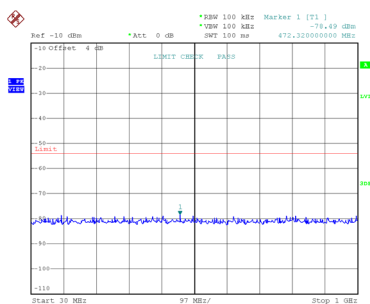


Date: 12.NOV.2025 14:40:41

CH122
f < 1GHz

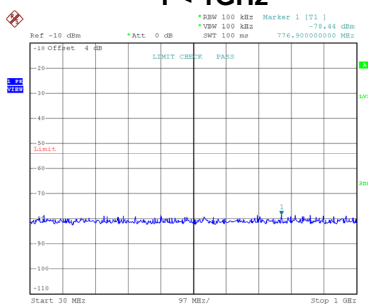


Date: 12.NOV.2025 14:41:30

CH138

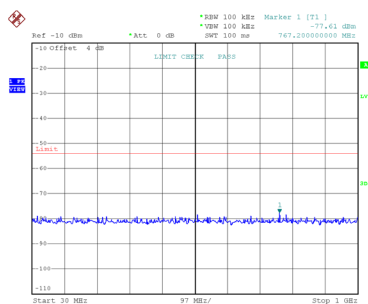


Date: 12.NOV.2025 14:42:11


f ≥ 1GHz

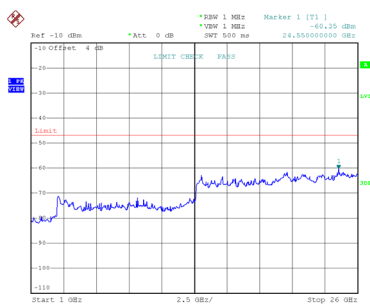

Date: 12.NOV.2025 14:40:51

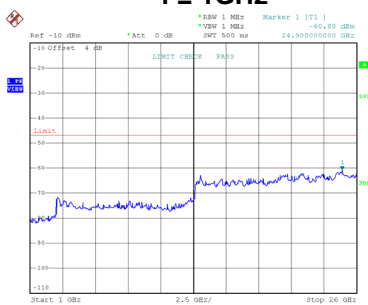

Date: 12.NOV.2025 14:41:40

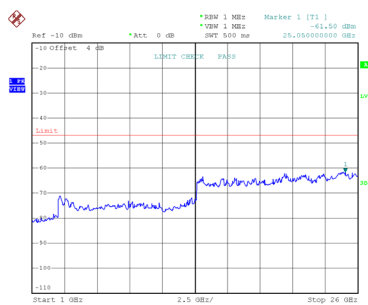


Date: 12.NOV.2025 14:42:21


Test Mode:	IEEE 802.11ac(VHT160) - W56
------------	-----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5570	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	309.36	Limit ≤ 4 nW (-54 dBm)
	nW	0.0160	
	MHz	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.6714	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

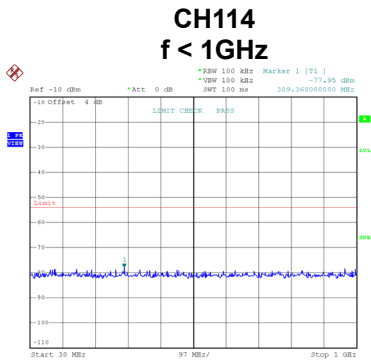

Date: 12.NOV.2025 14:47:32

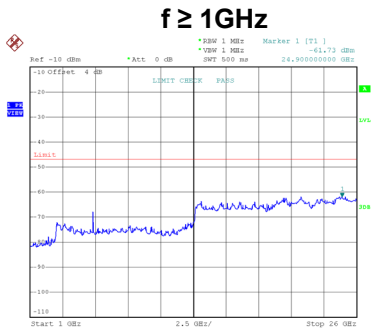

Date: 12.NOV.2025 14:47:41

Test Mode: IEEE 802.11ax(HE20) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	627.52	86.26	299.66	Limit ≤ 4 nW (-54 dBm)
	nW	0.0148	0.0166	0.0138	
	MHz	24900.00	24650.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7603	0.8670	0.7889	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH100

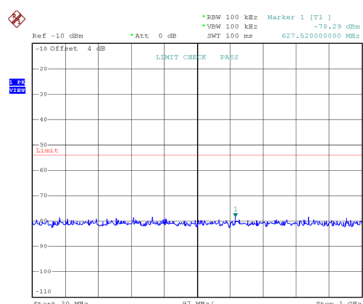


Date: 12.NOV.2025 14:24:04

CH120
f < 1GHz

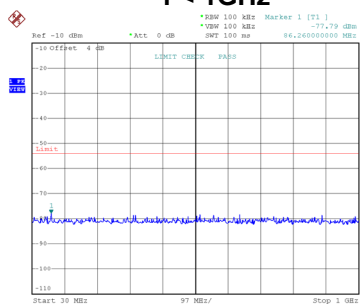


Date: 12.NOV.2025 14:24:26

CH144

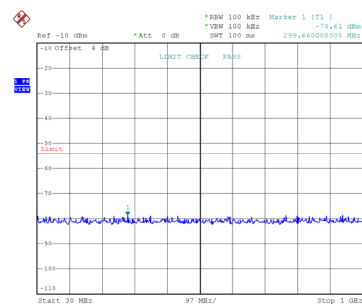


Date: 12.NOV.2025 14:24:50


f ≥ 1GHz

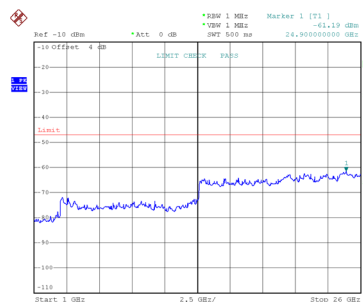

Date: 12.NOV.2025 14:24:15

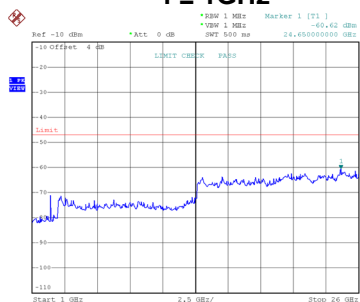

Date: 12.NOV.2025 14:24:37

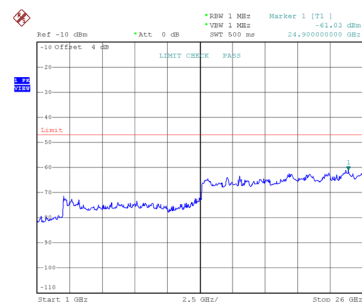

Date: 12.NOV.2025 14:25:00

Test Mode: IEEE 802.11ax(HE40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	256.98	928.22	823.46	Limit ≤ 4 nW (-54 dBm)
	nW	0.0155	0.0140	0.0144	
	MHz	24600.00	24950.00	24950.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7603	0.8260	0.7943	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH102

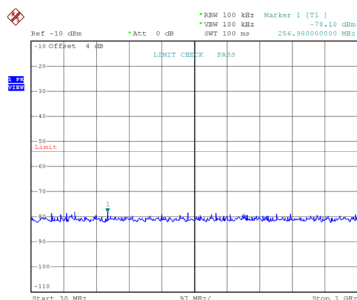


Date: 12.NOV.2025 14:35:52

CH118
f < 1GHz




Date: 12.NOV.2025 14:36:19

CH142




Date: 12.NOV.2025 14:36:43


f ≥ 1GHz

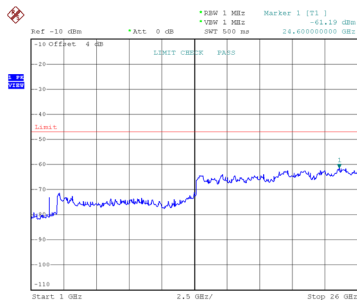

Date: 12.NOV.2025 14:36:02



Date: 12.NOV.2025 14:36:30



Date: 12.NOV.2025 14:36:53

Test Mode: IEEE 802.11ax(HE80) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	924.34	903.00	934.04	Limit ≤ 4 nW (-54 dBm)
	nW	0.0153	0.0161	0.0148	
	MHz	24500.00	24800.00	24950.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7798	0.8453	0.6839	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH106

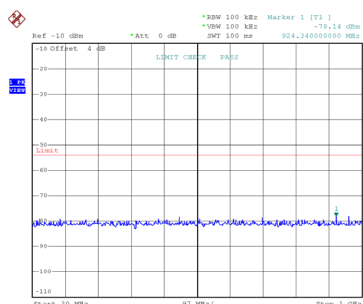


Date: 12.NOV.2025 14:45:11

CH122
f < 1GHz

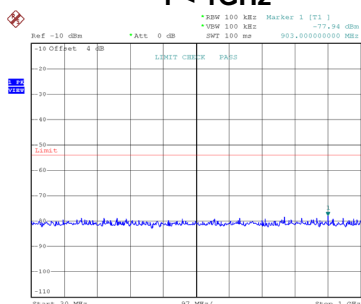


Date: 12.NOV.2025 14:45:34

CH138

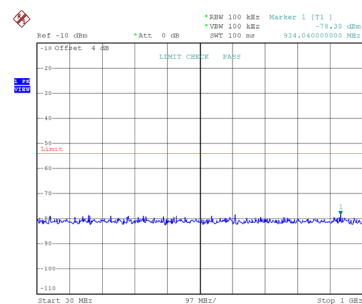


Date: 12.NOV.2025 14:45:55


f ≥ 1GHz

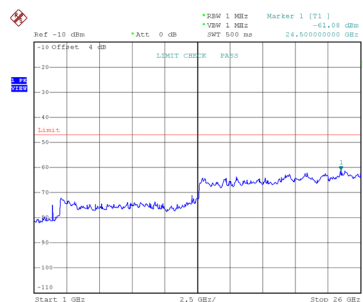

Date: 12.NOV.2025 14:45:22

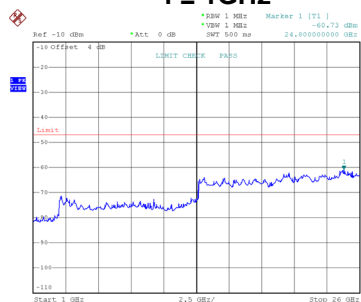

Date: 12.NOV.2025 14:45:44

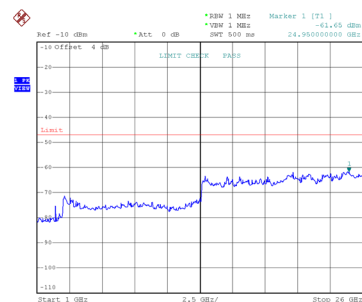

Date: 12.NOV.2025 14:46:05

Test Mode: IEEE 802.11ax(HE160) - W56

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5570	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	107.60	Limit ≤ 4 nW (-54 dBm)
	nW	0.0141	
	MHz	24450.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7244	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH114 f < 1GHz

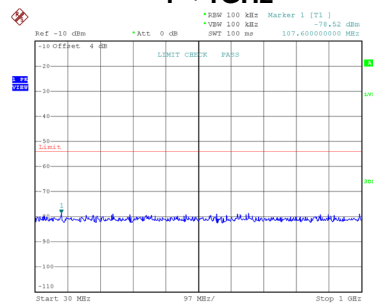

Date: 12.NOV.2025 14:48:19

f ≥ 1GHz

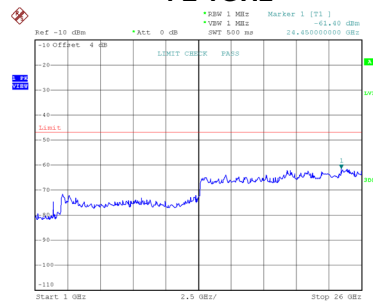

Date: 12.NOV.2025 14:48:27

Test Mode: IEEE 802.11be(EHT20) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	538.28	953.44	912.70	Limit ≤ 4 nW (-54 dBm)
	nW	0.0167	0.0158	0.0149	
	MHz	20600.00	26000.00	24950.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.8128	0.9550	0.7244	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH100

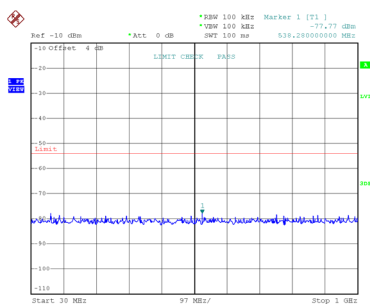


Date: 12.NOV.2025 15:19:53

CH120
f < 1GHz

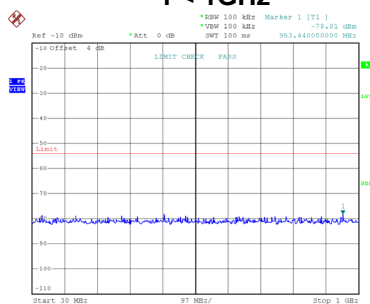


Date: 12.NOV.2025 15:20:17

CH144

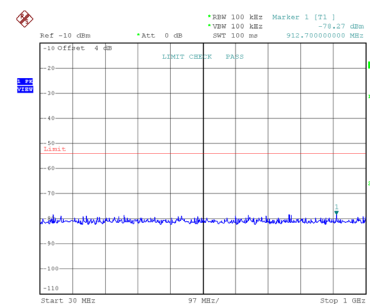


Date: 12.NOV.2025 15:20:43


f ≥ 1GHz

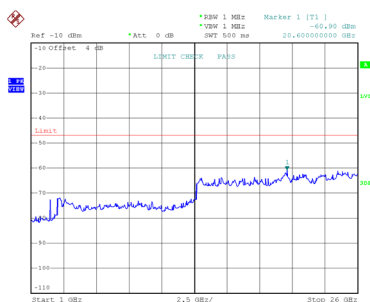

Date: 12.NOV.2025 15:20:03

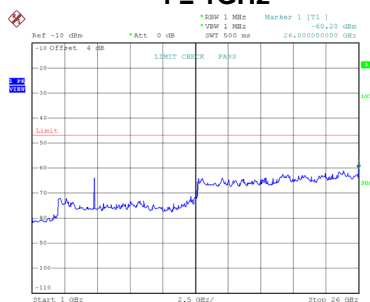

Date: 12.NOV.2025 15:20:28

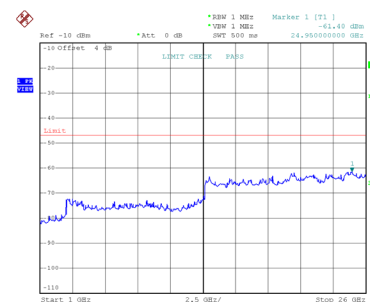

Date: 12.NOV.2025 15:20:53

Test Mode: IEEE 802.11be(EHT40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Limitation of Collateral	MHz	458.74	837.04	877.78	Limit ≤ 4 nW (-54 dBm)
	nW	0.0148	0.0137	0.0160	
Emission of Receiver	MHz	24600.00	24700.00	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7015	0.7362	1.0093	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH102

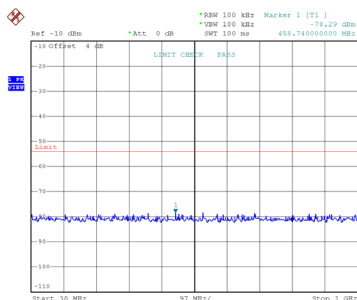


Date: 12.NOV.2025 14:56:01

CH118
f < 1GHz




Date: 12.NOV.2025 14:57:01

CH142




Date: 12.NOV.2025 14:57:43


f ≥ 1GHz

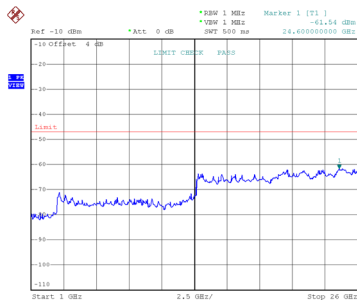

Date: 12.NOV.2025 14:56:09



Date: 12.NOV.2025 14:57:09




Date: 12.NOV.2025 14:57:52

Test Mode:	IEEE 802.11be(EHT80) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	650.80	499.48	573.20	Limit ≤ 4 nW (-54 dBm)
	nW	0.0140	0.0141	0.0146	
	MHz	23300.00	25650.00	24650.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.7345	0.7447	0.7925	


Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH106

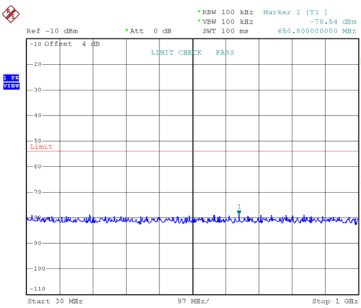


Date: 12.NOV.2025 14:52:09

CH122
f < 1GHz

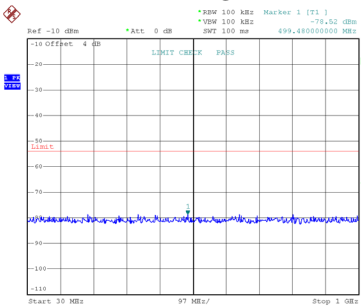


Date: 12.NOV.2025 14:52:29

CH138

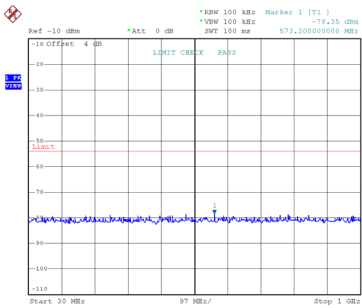


Date: 12.NOV.2025 14:53:37


f ≥ 1GHz

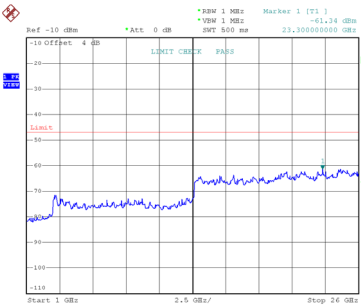

Date: 12.NOV.2025 14:52:18

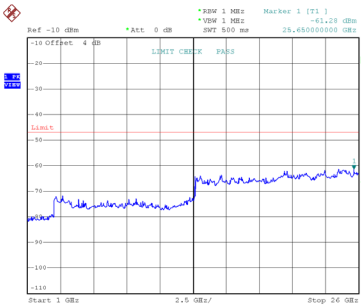

Date: 12.NOV.2025 14:52:38

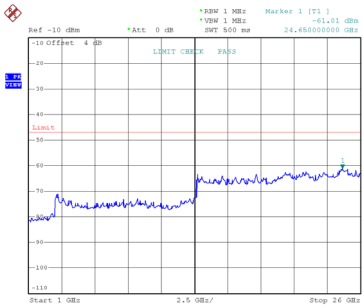

Date: 12.NOV.2025 14:53:45

Test Mode:	IEEE 802.11be(EHT160) - W56
------------	-----------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5570	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	235.64	Limit ≤ 4 nW (-54 dBm)
	nW	0.0190	
	MHz	24550.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.6531	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas

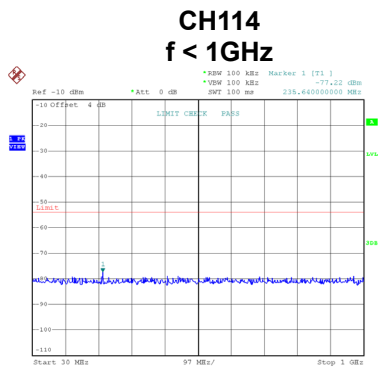

Date: 12.NOV.2025 14:49:58

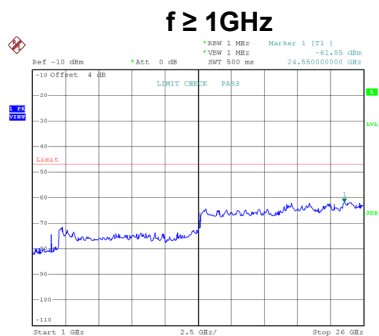

Date: 12.NOV.2025 14:50:07

APPENDIX G - TRANSMISSION BURST LENGTH

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.125	0.125	0.125	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT20) - W52
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.186	0.186	0.186	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.129	0.129	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.12		Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE20) - W52
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.325	0.325	0.325	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE40) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.31	0.31	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE80) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.295		Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT20) - W52
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.325	0.325	0.325	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.305	0.305	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.295		Limit ≤ 8msec

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.125	0.125	0.125	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT20) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.186	0.186	0.186	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.129	0.129	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.12		Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE20) - W53
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.325	0.325	0.325	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.31	0.31	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.295		Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT20) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.325	0.325	0.325	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.305	0.305	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.295		Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT160) - W52+W53
------------	---------------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.12	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE160) - W52+W53
------------	--------------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.29	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT160) - W52+W53
------------	---------------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.29	Limit ≤ 8msec

Test Mode:	IEEE 802.11a - W56
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.125	0.125	0.125	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT20) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.186	0.186	0.186	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT40) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.129	0.129	0.129	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT80) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.12	0.12	0.12	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT160) - W56
------------	-----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5570		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.12		Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE20) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.325	0.325	0.325	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE40) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.31	0.31	0.31	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE80) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.295	0.295	0.295	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE160) - W56
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5570		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.29		Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT20) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.325	0.325	0.325	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT40) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.305	0.305	0.305	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT80) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.295	0.295	0.295	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT160) - W56
------------	-----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5570		Low/Mid/High of test frequency range
Transmission Burst Length	msec	0.29		Limit ≤ 8msec

APPENDIX H - CARRIER SENSE CAPABILITY

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ac(VHT20) - W52
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ac(VHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ac(VHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ax(HE20) - W52
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE40) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE80) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT20) - W52
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ac(VHT20) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ac(VHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ax(HE20) - W53
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT20) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT160) - W52+W53
------------	---------------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11ax(HE160) - W52+W53
------------	--------------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11be(EHT160) - W52+W53
------------	---------------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode:	IEEE 802.11a - W56
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT20) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT40) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT80) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT160) - W56
------------	-----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5570		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE20) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE40) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE80) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE160) - W56
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5570		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT20) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT40) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT80) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Power level = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT160) - W56
------------	-----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5570	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	Power level = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

End of Test Report