


Site: AC1	Time: 2020/03/16 - 20:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1361 (CDD Mode)	

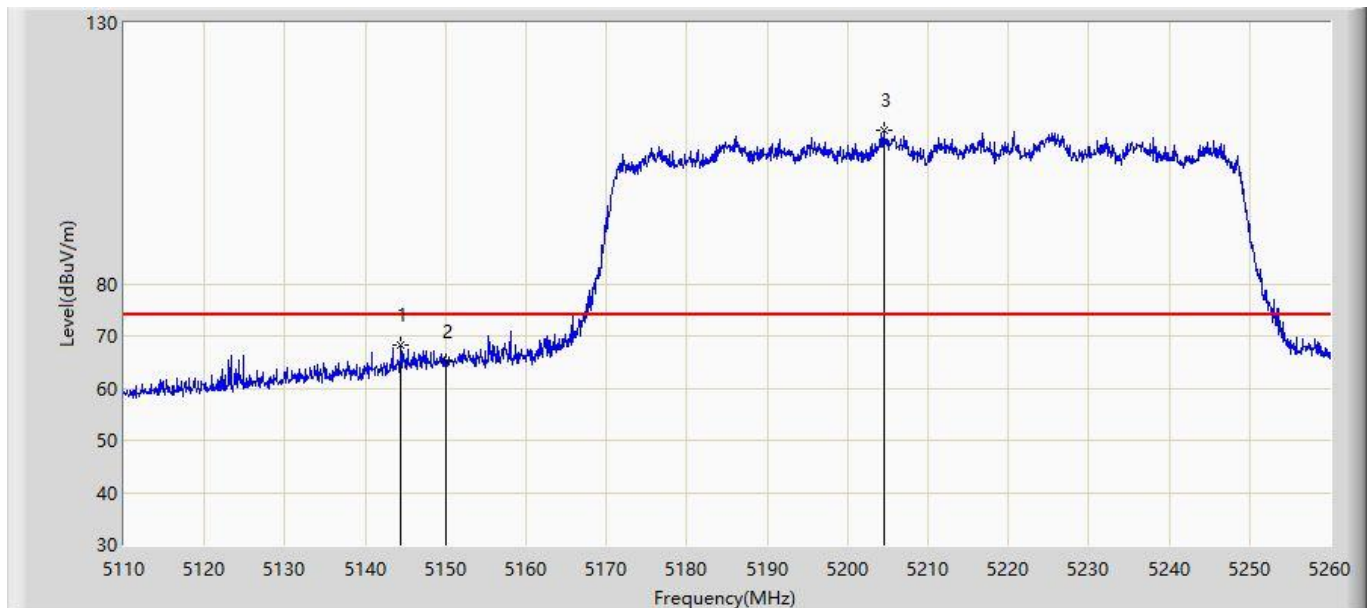


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.425	68.309	64.666	-5.691	74.000	3.643	PK
2			5150.000	64.952	61.306	-9.048	74.000	3.646	PK
3		*	5204.500	109.428	105.747	N/A	N/A	3.681	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1361 (CDD Mode)	

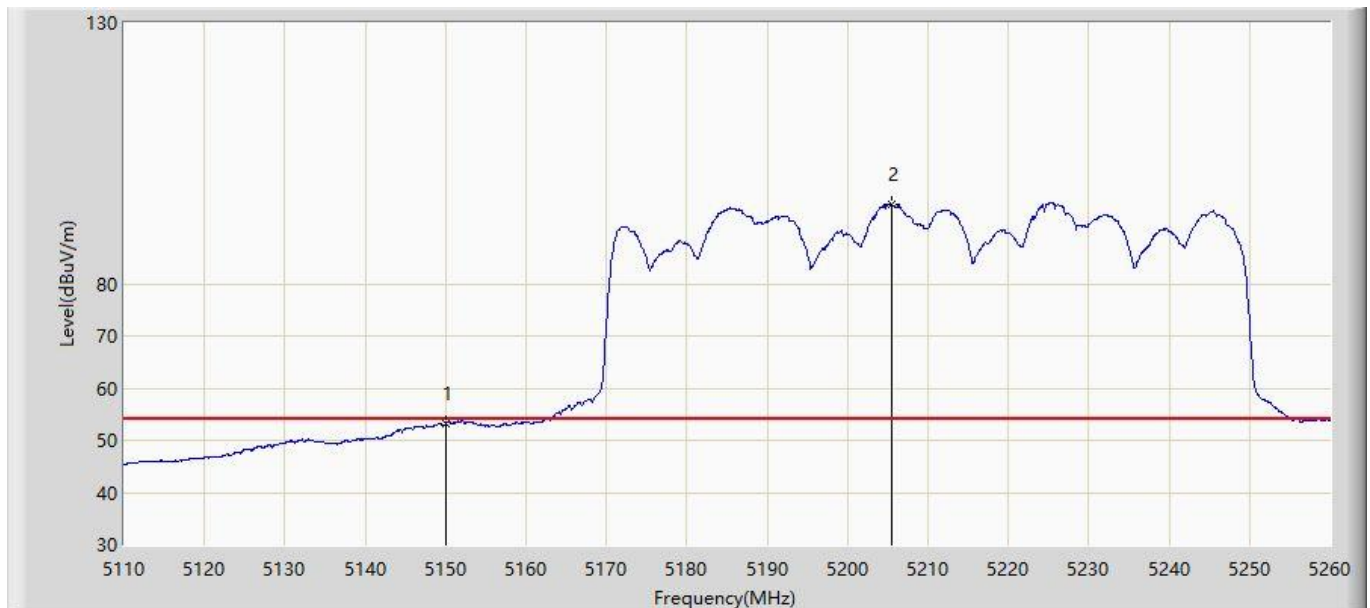


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.223	49.577	-0.777	54.000	3.646	AV
2		*	5205.550	95.139	91.457	N/A	N/A	3.682	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1361 (CDD Mode)	

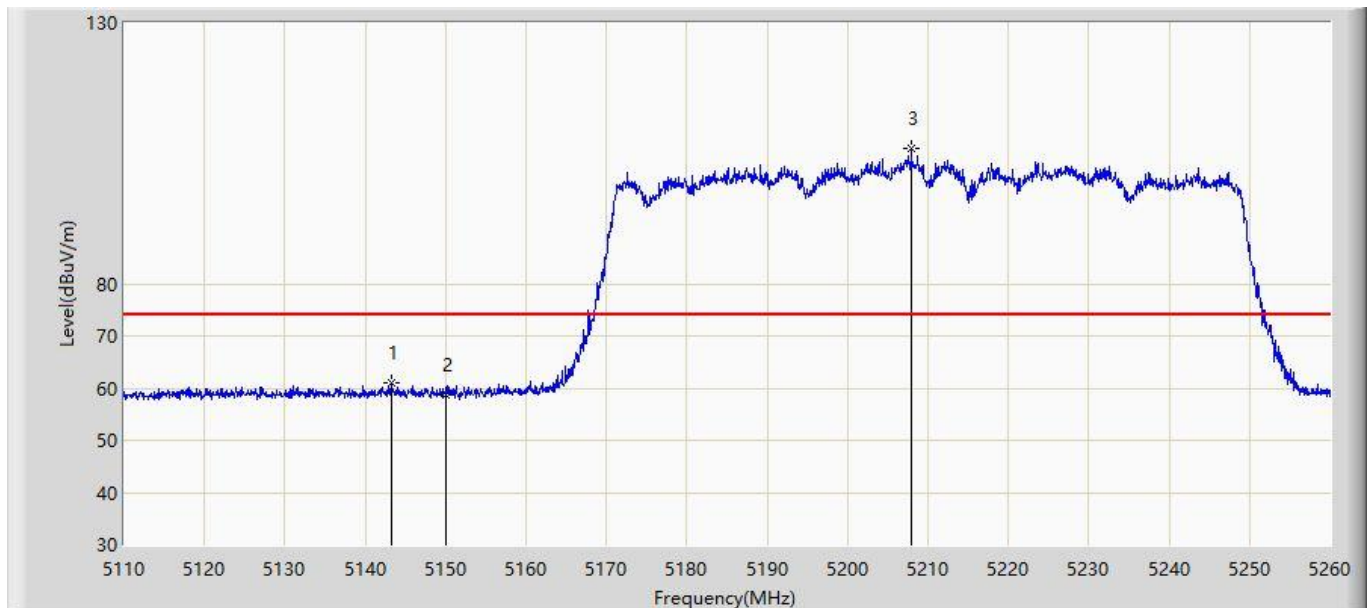


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.300	61.114	57.472	-12.886	74.000	3.642	PK
2			5150.000	58.835	55.189	-15.165	74.000	3.646	PK
3		*	5207.950	105.997	102.314	N/A	N/A	3.684	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1361 (CDD Mode)	

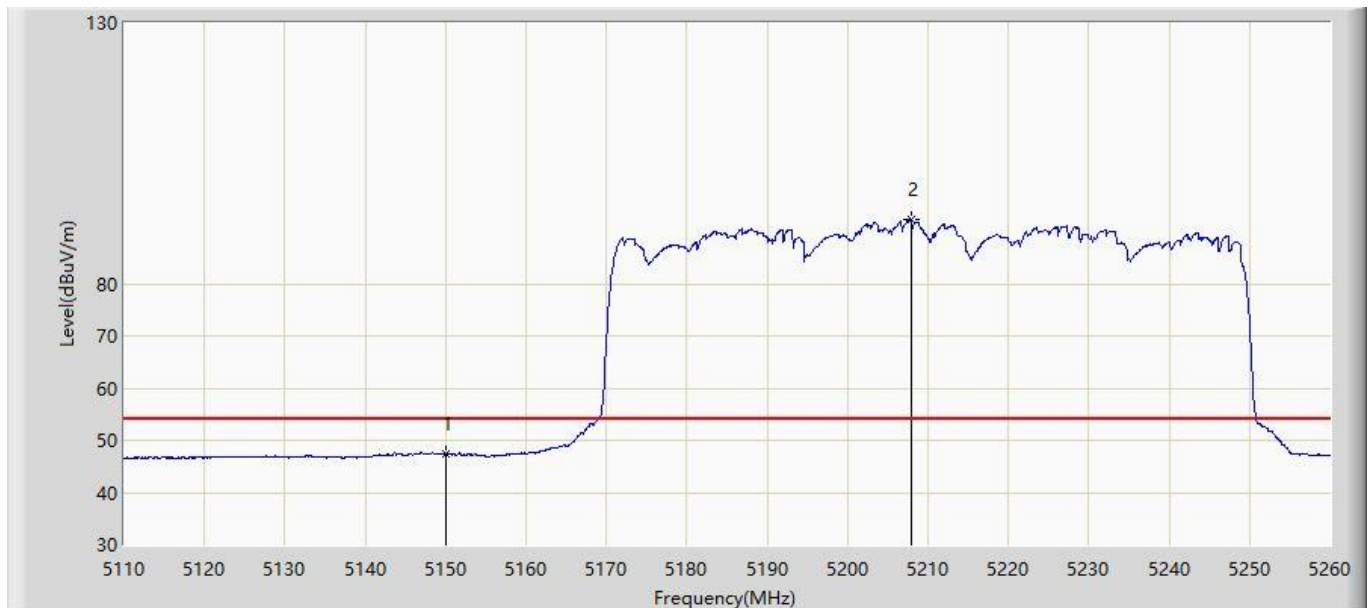


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.400	43.754	-6.600	54.000	3.646	AV
2		*	5208.025	92.274	88.591	N/A	N/A	3.684	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1361 (CDD Mode)	

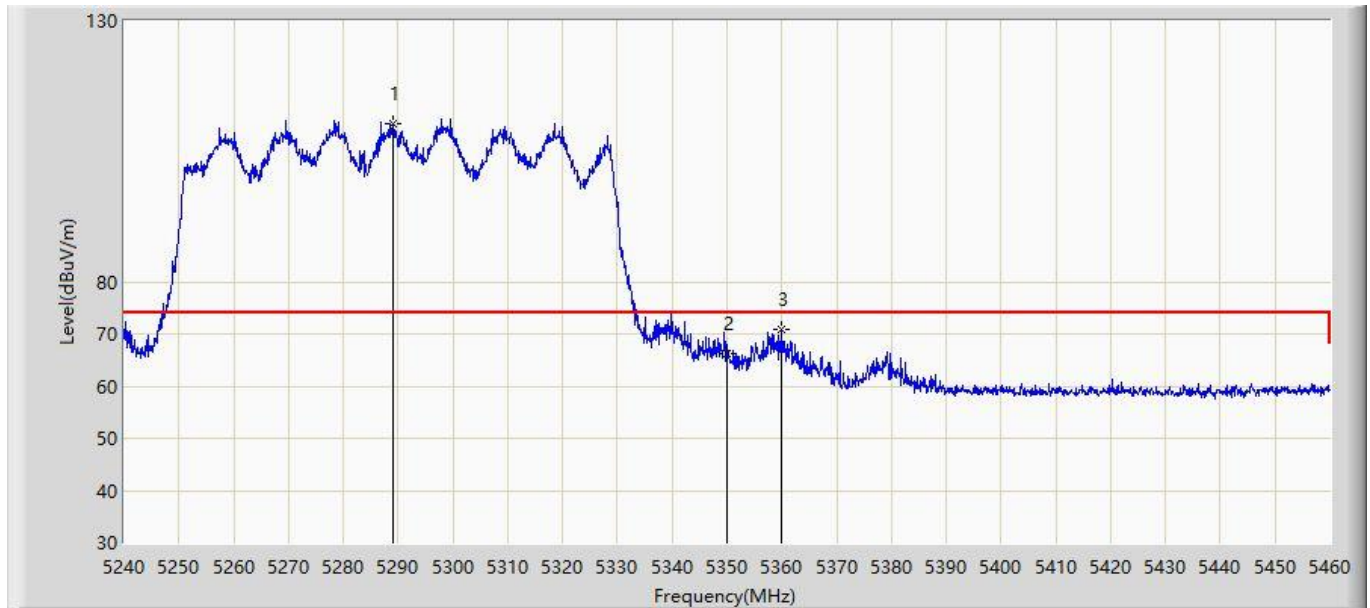


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5289.170	110.396	106.661	N/A	N/A	3.735	PK
2			5350.000	66.336	62.562	-7.664	74.000	3.774	PK
3			5360.010	70.853	67.073	-3.147	74.000	3.781	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1361 (CDD Mode)	

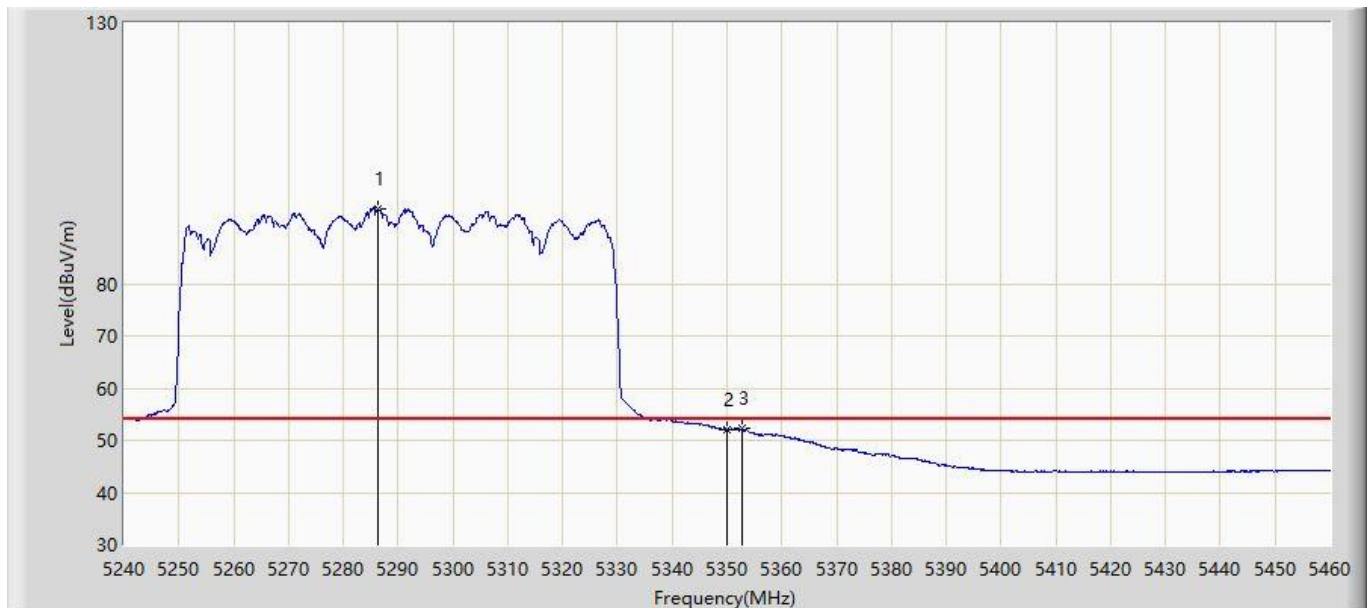


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5286.310	94.444	90.711	N/A	N/A	3.732	AV
2			5350.000	52.003	48.229	-1.997	54.000	3.774	AV
3			5352.640	52.280	48.505	-1.720	54.000	3.776	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1361 (CDD Mode)	

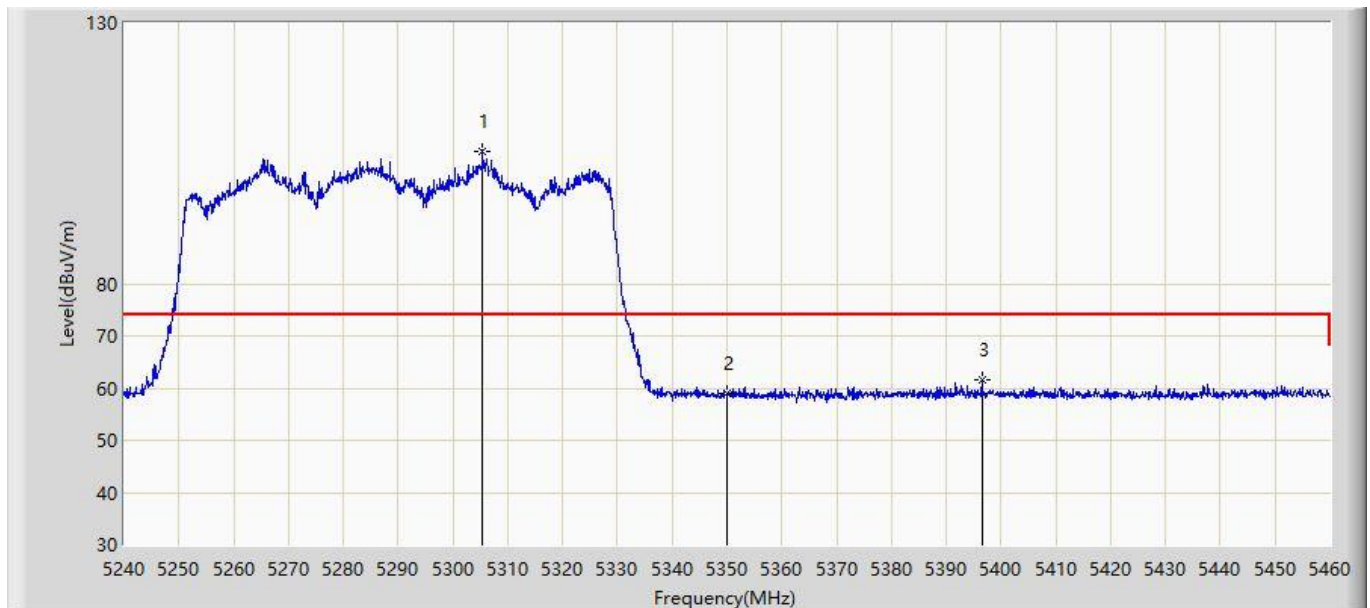


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.450	105.506	101.761	N/A	N/A	3.746	PK
2			5350.000	58.997	55.223	-15.003	74.000	3.774	PK
3			5396.530	61.593	57.789	-12.407	74.000	3.804	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1361 (CDD Mode)	

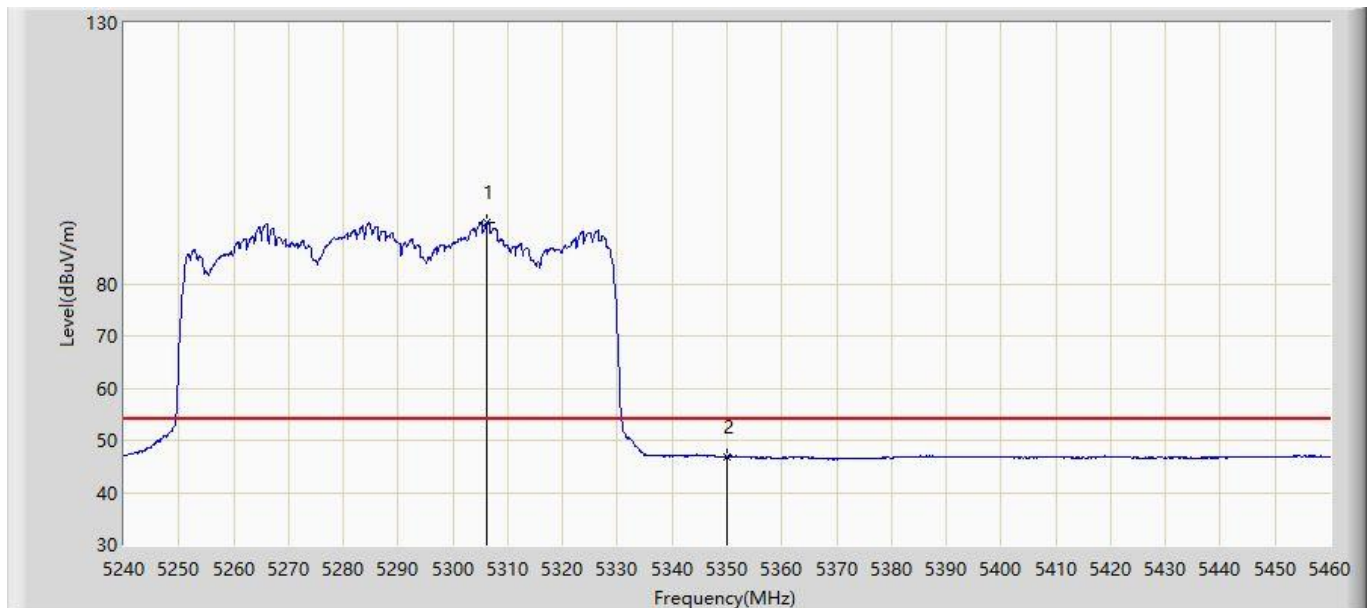


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.220	91.647	87.901	N/A	N/A	3.746	AV
2			5350.000	46.808	43.034	-7.192	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1361 (CDD Mode)	

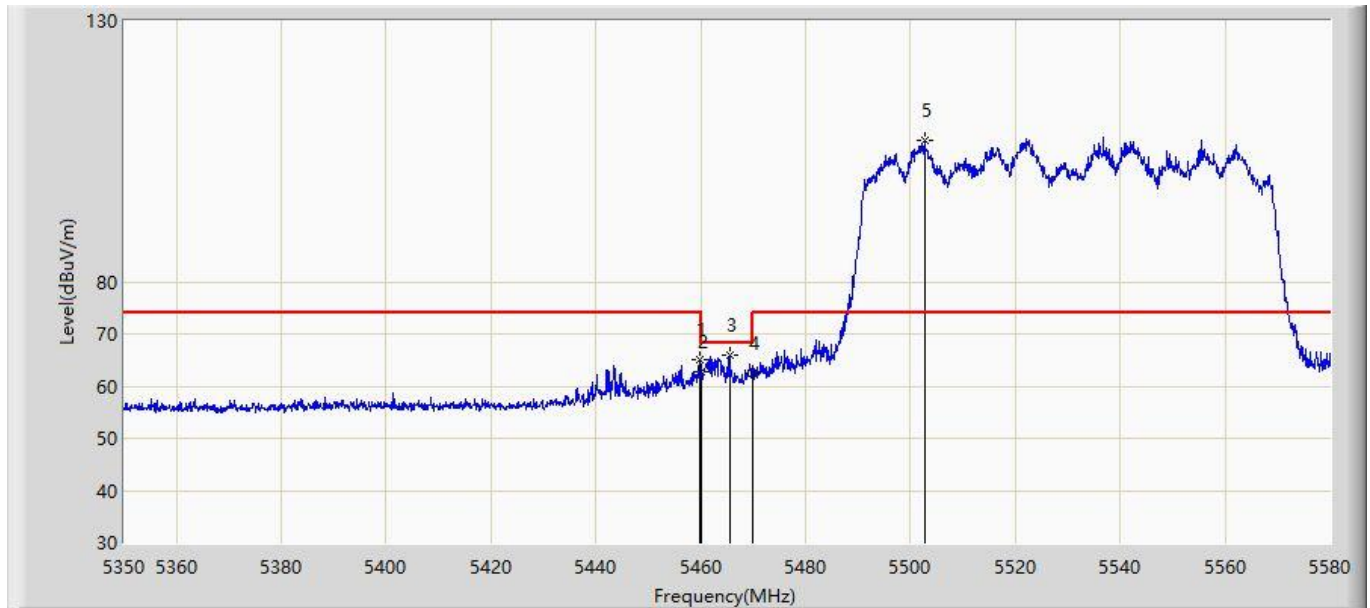


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.825	65.170	61.326	-8.830	74.000	3.844	PK
2			5460.000	62.750	58.906	-11.250	74.000	3.844	PK
3			5465.460	65.809	61.961	-2.391	68.200	3.848	PK
4			5470.000	62.412	58.561	-5.788	68.200	3.850	PK
5		*	5502.720	106.974	103.088	N/A	N/A	3.886	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1361 (CDD Mode)	

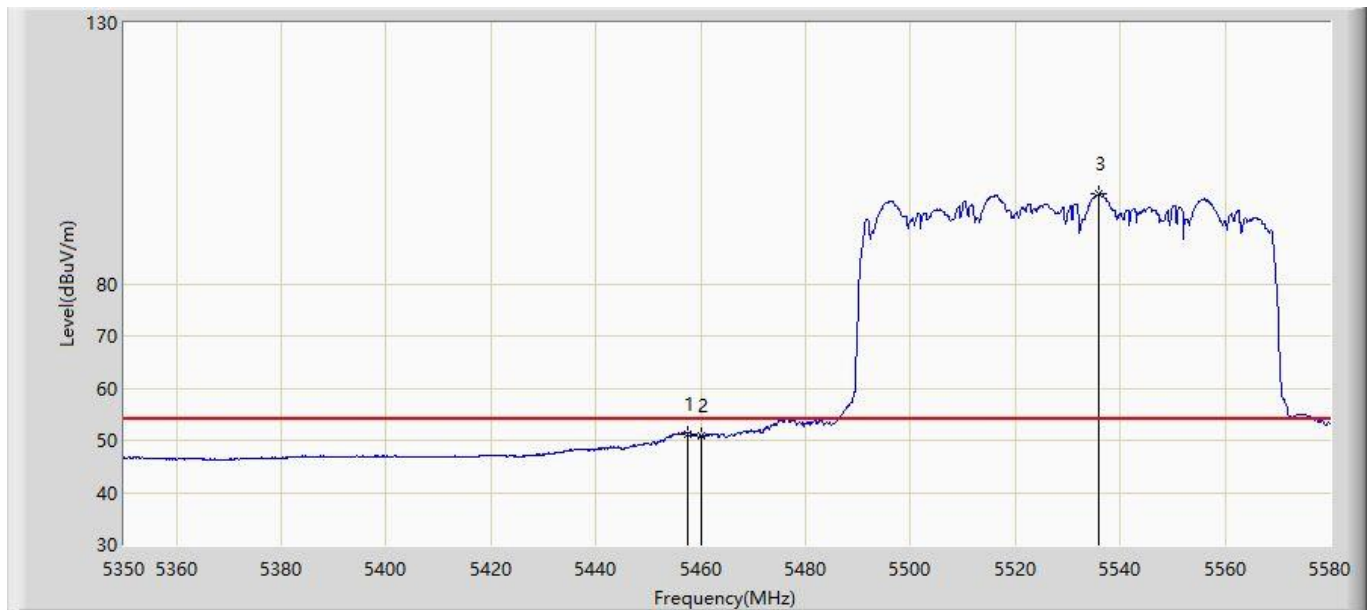


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.525	51.294	47.452	-2.706	54.000	3.842	AV
2			5460.000	50.924	47.080	-3.076	54.000	3.844	AV
3		*	5535.840	97.119	93.111	N/A	N/A	4.007	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1361 (CDD Mode)	

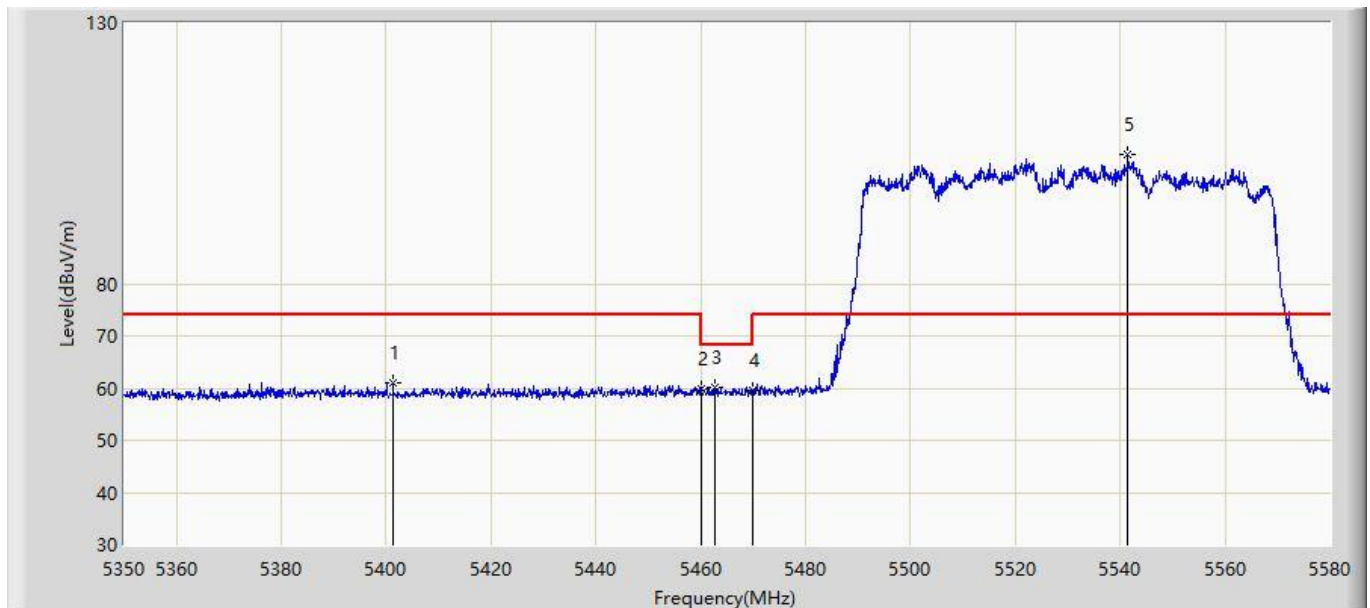


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5401.290	61.073	57.266	-12.927	74.000	3.807	PK
2			5460.000	59.864	56.020	-14.136	74.000	3.844	PK
3			5462.700	60.170	56.324	-8.030	68.200	3.846	PK
4			5470.000	59.453	55.602	-8.747	68.200	3.850	PK
5		*	5541.475	104.847	100.818	N/A	N/A	4.030	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1361 (CDD Mode)	

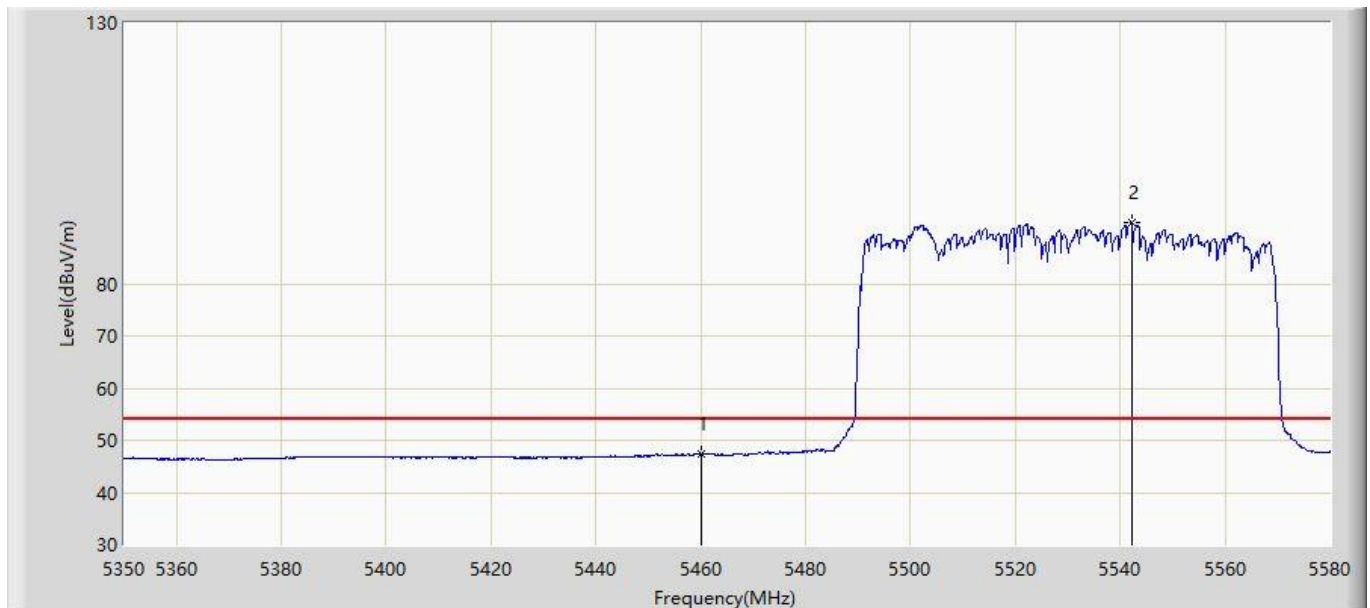


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.347	43.503	-6.653	54.000	3.844	AV
2		*	5542.280	91.829	87.797	N/A	N/A	4.033	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz with OAW-AP1361 (CDD Mode)	

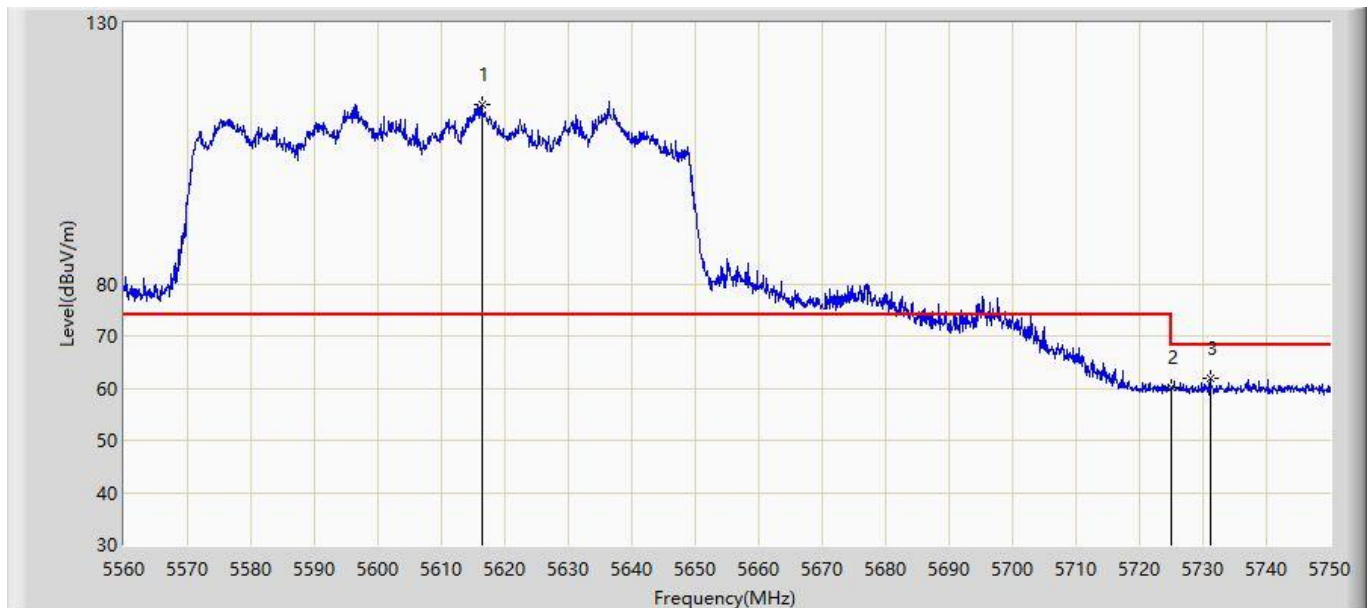


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5616.335	114.231	109.915	N/A	N/A	4.316	PK
2			5725.000	60.208	55.474	-7.992	68.200	4.734	PK
3			5731.095	61.803	57.046	-6.397	68.200	4.757	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz with OAW-AP1361 (CDD Mode)	

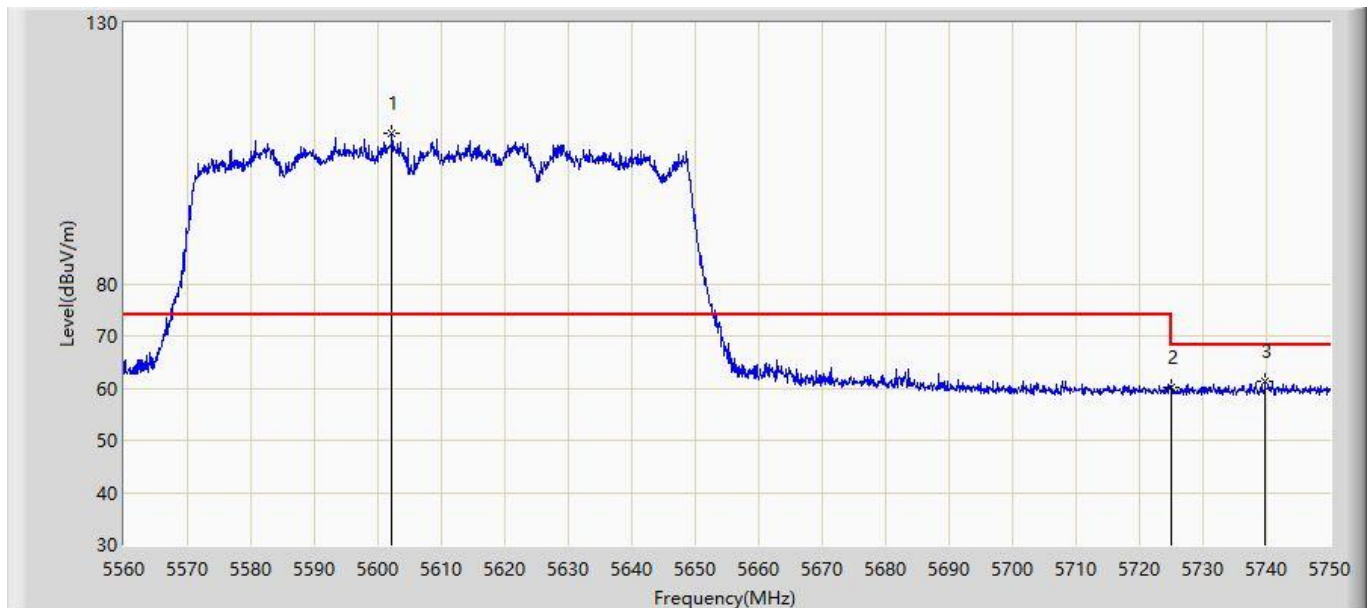


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5602.180	108.731	104.469	N/A	N/A	4.261	PK
2			5725.000	60.227	55.493	-7.973	68.200	4.734	PK
3			5739.740	61.238	56.448	-6.962	68.200	4.790	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz with OAW-AP1361 (CDD Mode)	

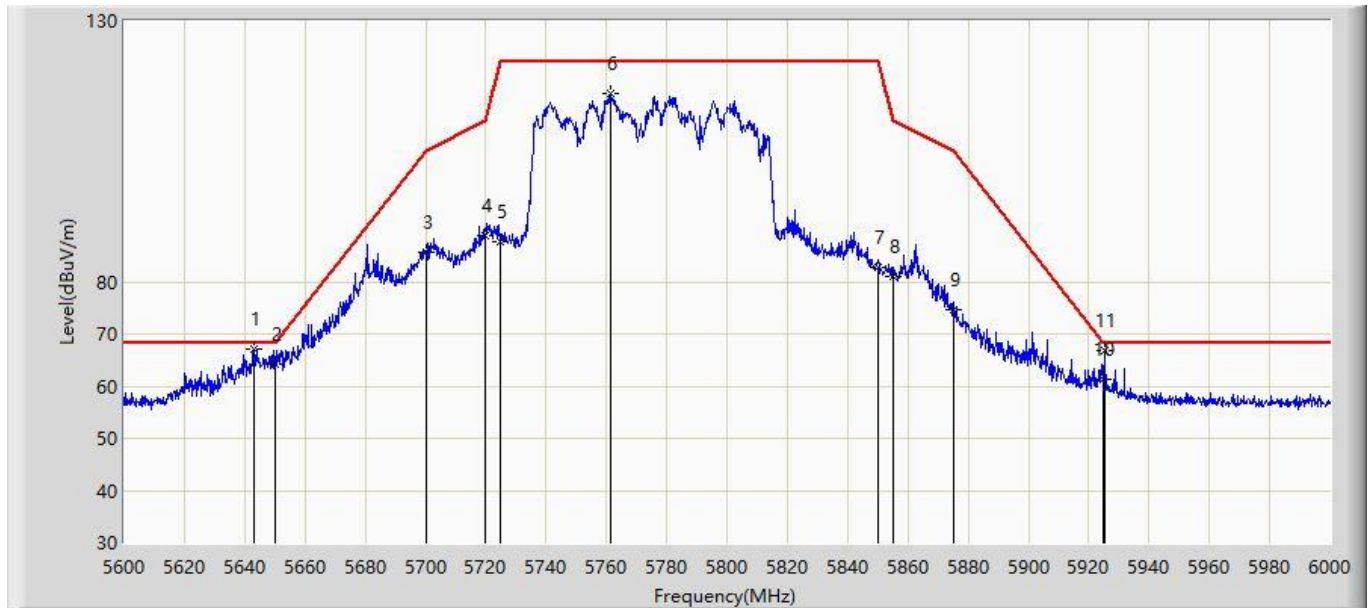


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.000	67.052	62.633	-1.148	68.200	4.419	PK
2			5650.000	64.312	59.866	-3.888	68.200	4.446	PK
3			5700.000	85.710	81.072	-19.490	105.200	4.638	PK
4			5720.000	88.799	84.084	-22.001	110.800	4.715	PK
5			5725.000	87.666	82.932	-34.534	122.200	4.734	PK
6			5761.400	116.039	111.166	N/A	N/A	4.874	PK
7			5850.000	82.829	77.615	-39.371	122.200	5.214	PK
8			5855.000	81.122	75.889	-29.678	110.800	5.233	PK
9			5875.000	74.755	69.445	-30.445	105.200	5.310	PK
10			5925.000	61.204	55.702	-6.996	68.200	5.502	PK
11			5925.200	66.758	61.256	-1.442	68.200	5.502	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz with OAW-AP1361 (CDD Mode)	

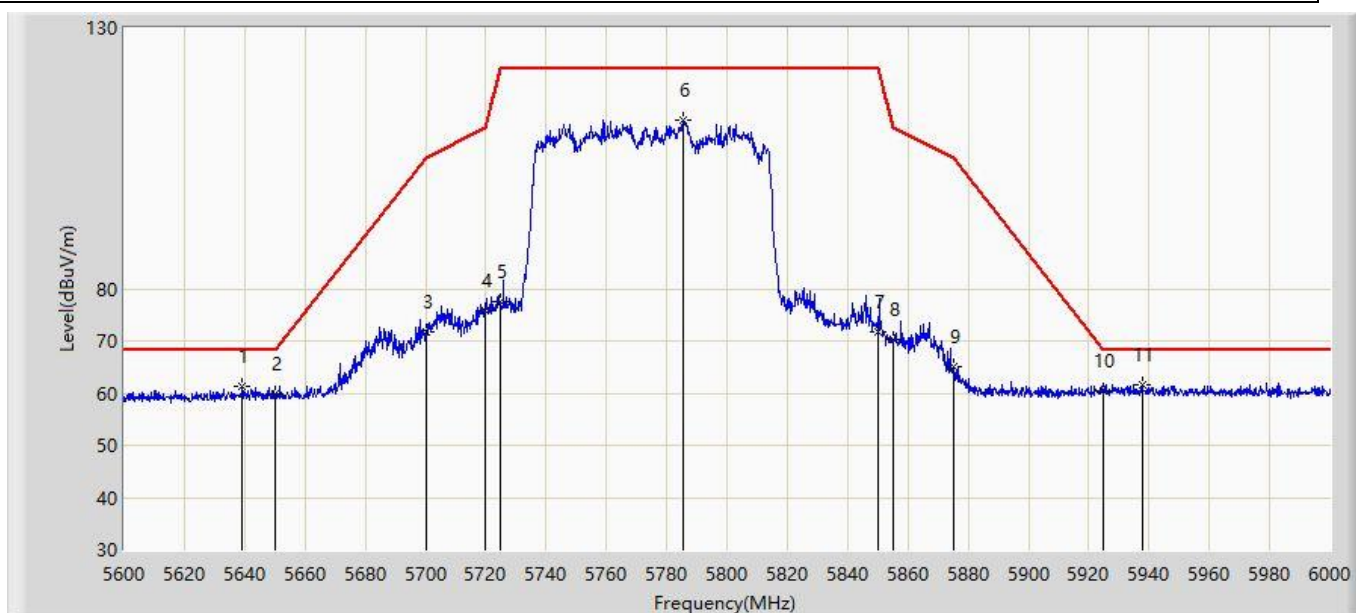


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5639.200	61.216	56.811	-6.984	68.200	4.405	PK
2			5650.000	59.818	55.372	-8.382	68.200	4.446	PK
3			5700.000	71.641	67.003	-33.559	105.200	4.638	PK
4			5720.000	75.829	71.114	-34.971	110.800	4.715	PK
5			5725.000	77.456	72.722	-44.744	122.200	4.734	PK
6			5785.400	112.461	107.495	N/A	N/A	4.966	PK
7			5850.000	71.857	66.643	-50.343	122.200	5.214	PK
8			5855.000	70.230	64.997	-40.570	110.800	5.233	PK
9			5875.000	65.070	59.760	-40.130	105.200	5.310	PK
10			5925.000	60.456	54.954	-7.744	68.200	5.502	PK
11		*	5937.600	61.488	55.937	-6.712	68.200	5.551	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/17 - 10:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1361 (CDD Mode)	

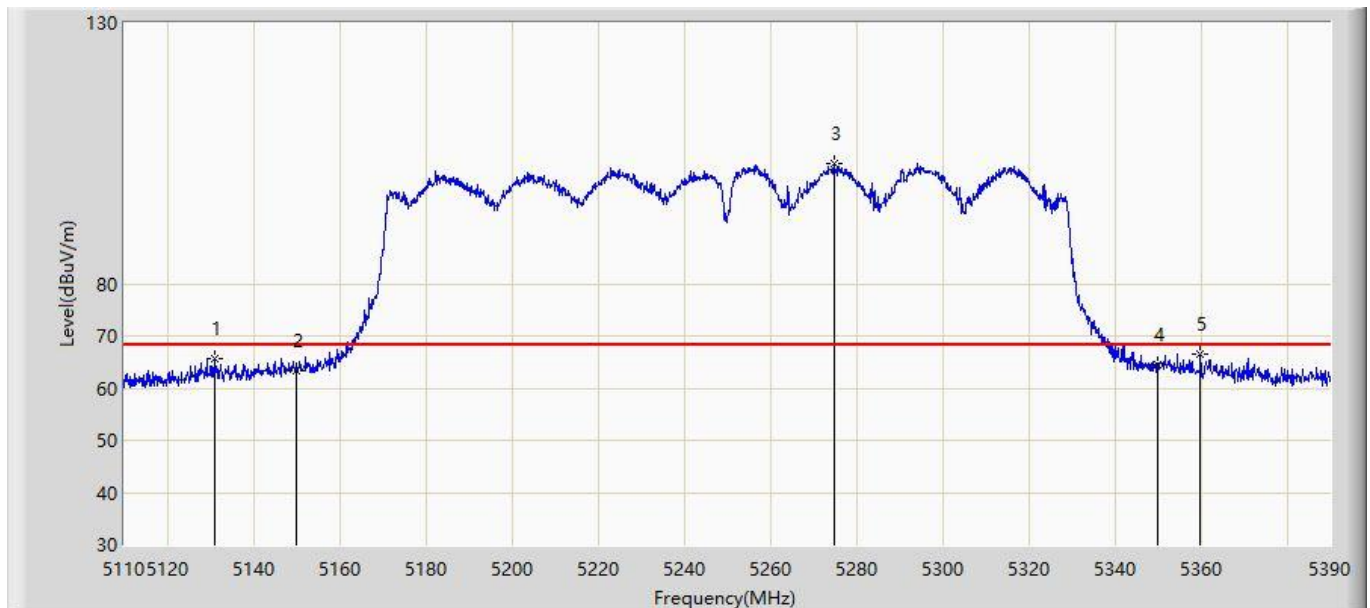


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.140	65.560	61.926	-2.640	68.200	3.634	PK
2			5150.000	63.457	59.811	-4.743	68.200	3.646	PK
3		*	5274.780	102.946	99.221	N/A	N/A	3.726	PK
4			5350.000	64.542	60.768	-3.658	68.200	3.774	PK
5			5359.900	66.470	62.690	-1.730	68.200	3.781	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/17 - 10:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1361 (CDD Mode)	

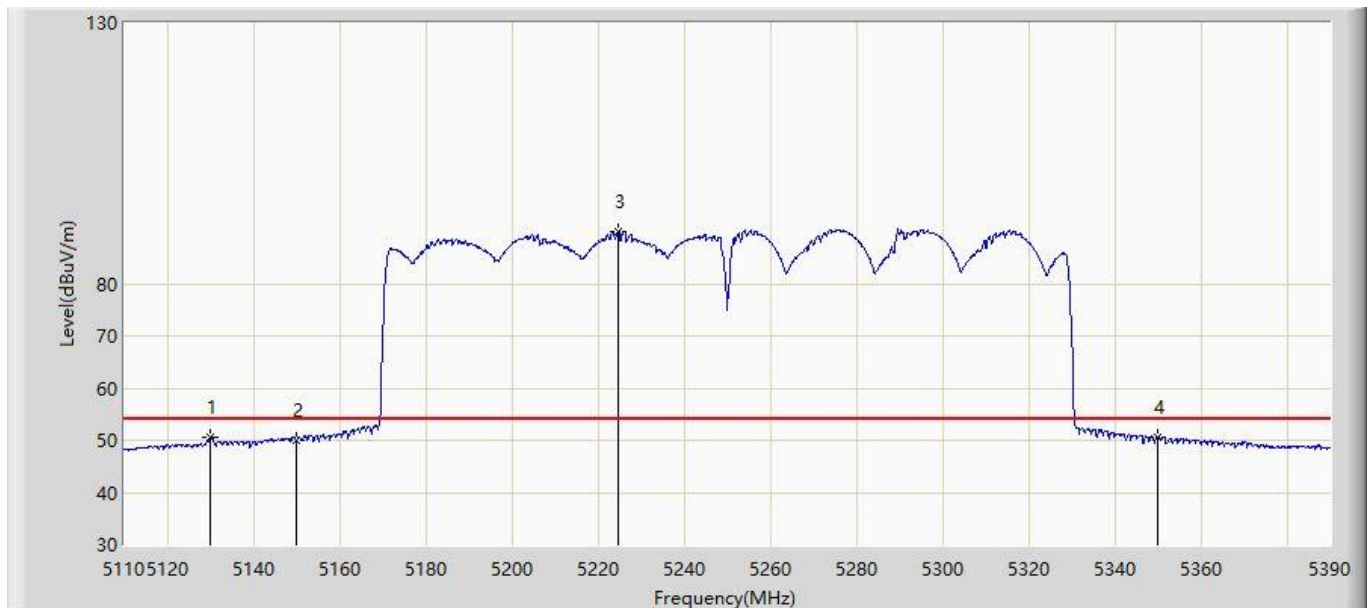


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.160	50.685	47.052	-3.315	54.000	3.633	AV
2			5150.000	50.020	46.374	-3.980	54.000	3.646	AV
3		*	5224.800	90.140	86.446	N/A	N/A	3.694	AV
4			5350.000	50.600	46.826	-3.400	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/17 - 10:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1361 (CDD Mode)	

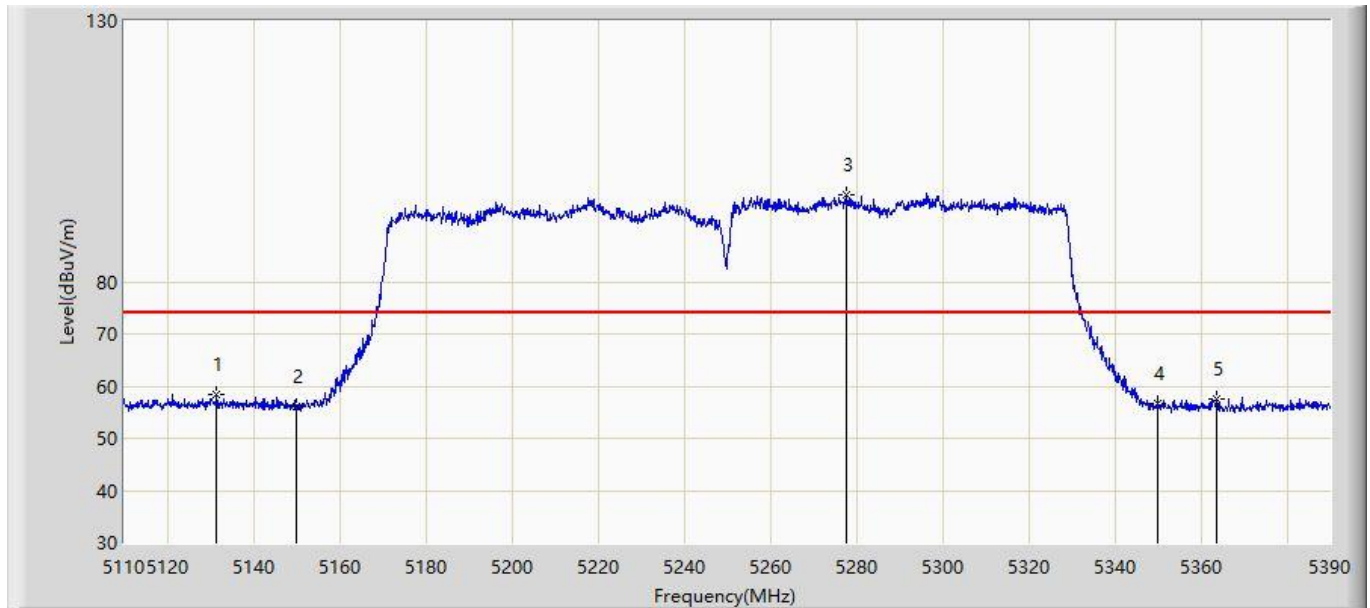


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.560	58.473	54.839	-15.527	74.000	3.634	PK
2			5150.000	56.099	52.453	-17.901	74.000	3.646	PK
3		*	5277.580	96.623	92.896	N/A	N/A	3.727	PK
4			5350.000	56.624	52.850	-17.376	74.000	3.774	PK
5			5363.680	57.613	53.830	-16.387	74.000	3.783	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/17 - 10:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1361 (CDD Mode)	

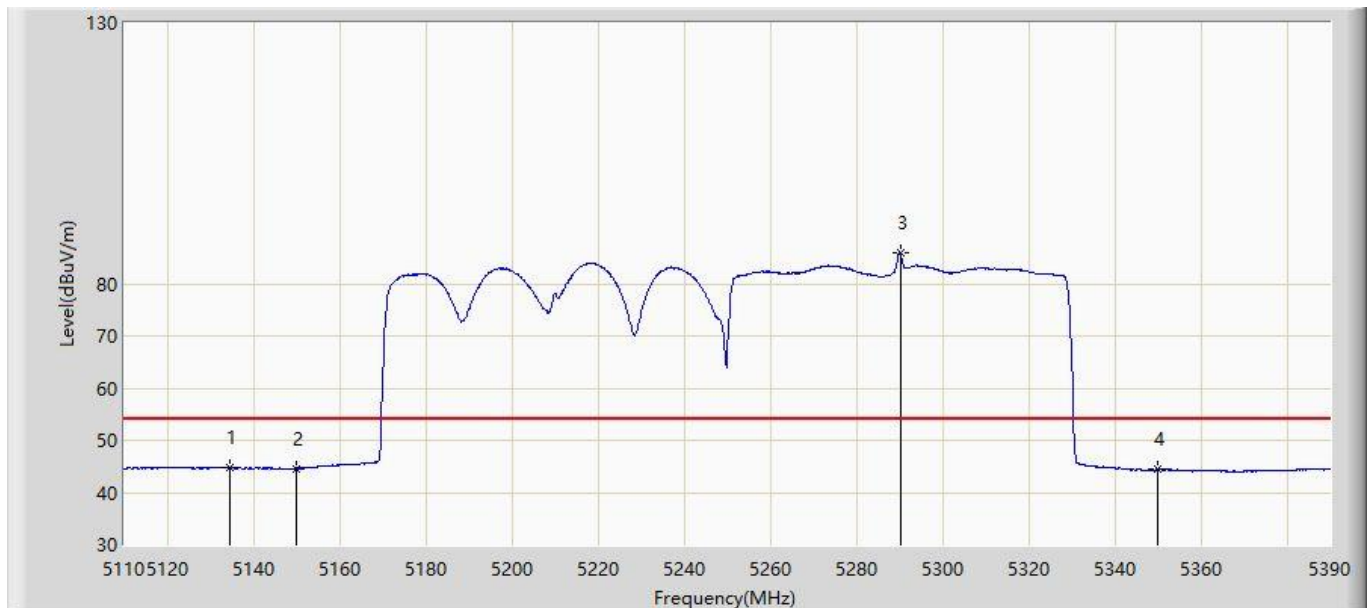


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.640	44.788	41.152	-9.212	54.000	3.636	AV
2			5150.000	44.572	40.926	-9.428	54.000	3.646	AV
3		*	5290.180	86.071	82.336	N/A	N/A	3.735	AV
4			5350.000	44.410	40.636	-9.590	54.000	3.774	AV

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/17 - 10:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1361 (CDD Mode)	

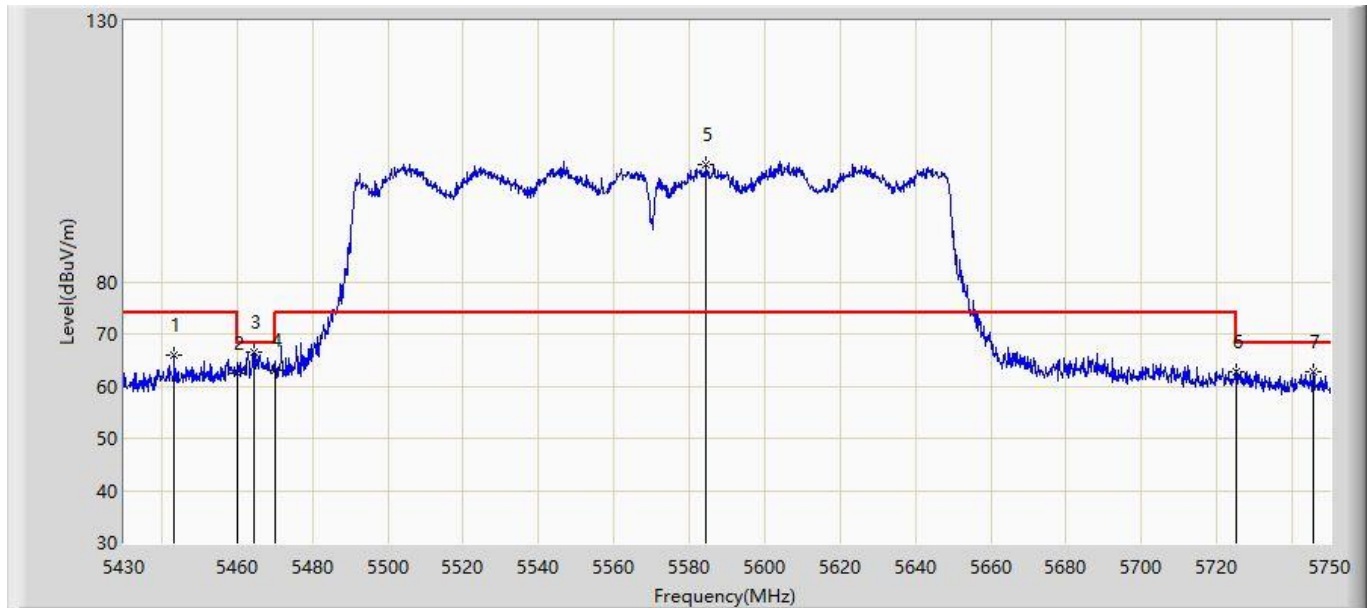


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.280	65.903	62.070	-8.097	74.000	3.833	PK
2			5460.000	62.599	58.755	-11.401	74.000	3.844	PK
3			5464.400	66.506	62.659	-1.694	68.200	3.847	PK
4			5470.000	63.008	59.157	-5.192	68.200	3.850	PK
5		*	5584.400	102.471	98.277	N/A	N/A	4.194	PK
6			5725.000	62.656	57.922	-5.544	68.200	4.734	PK
7			5745.680	62.875	58.062	-5.325	68.200	4.813	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/17 - 10:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1361 (CDD Mode)	

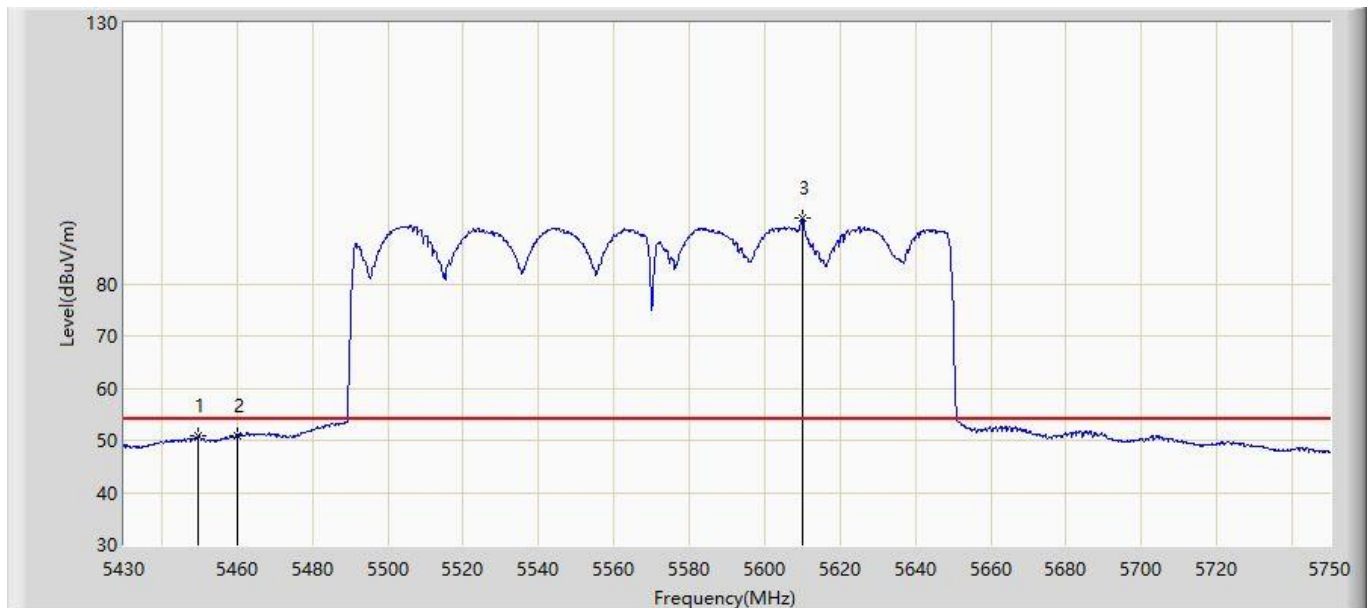


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.680	50.981	47.144	-3.019	54.000	3.836	AV
2			5460.000	50.957	47.113	-3.043	54.000	3.844	AV
3		*	5610.000	92.513	88.221	N/A	N/A	4.292	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/17 - 10:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1361 (CDD Mode)	

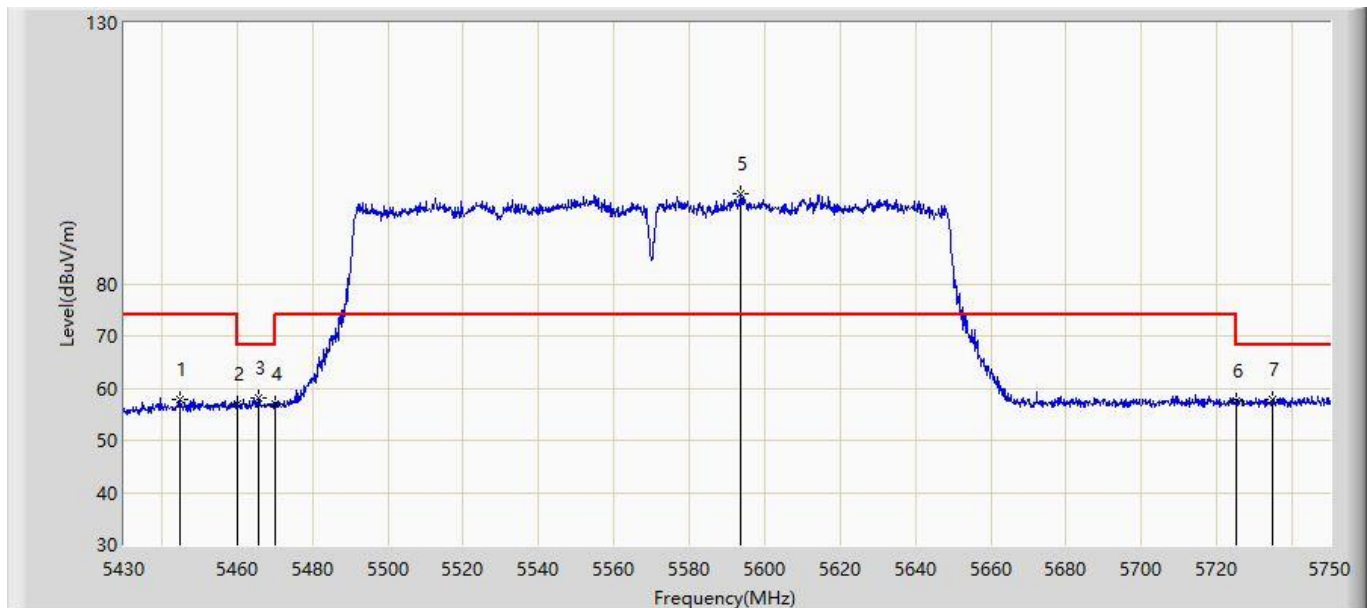


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.720	57.926	54.092	-16.074	74.000	3.834	PK
2			5460.000	56.962	53.118	-17.038	74.000	3.844	PK
3			5465.840	58.051	54.203	-10.149	68.200	3.848	PK
4			5470.000	56.847	52.996	-11.353	68.200	3.850	PK
5		*	5593.680	97.145	92.916	N/A	N/A	4.229	PK
6			5725.000	57.562	52.828	-10.638	68.200	4.734	PK
7			5734.800	57.903	53.132	-10.297	68.200	4.772	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/17 - 10:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1361 (CDD Mode)	

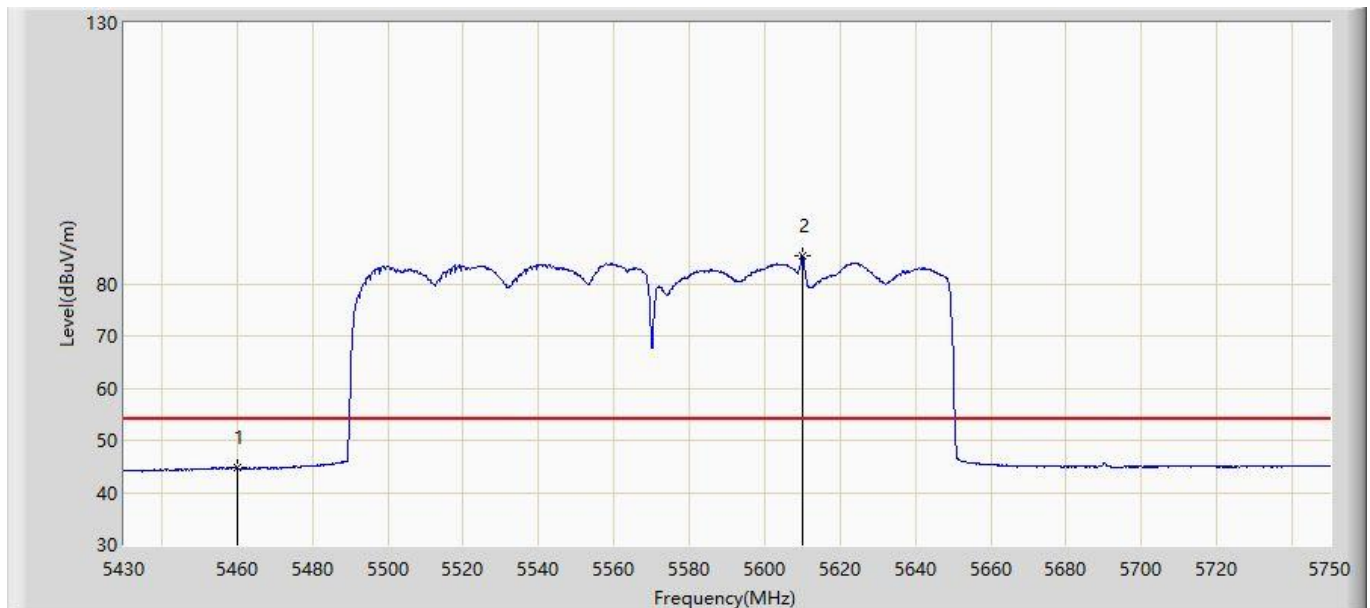


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.703	40.859	-9.297	54.000	3.844	AV
2		*	5610.000	85.460	81.168	N/A	N/A	4.292	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Mode No.: OAW-AP1361D

Site: AC1	Time: 2020/03/25 - 19:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

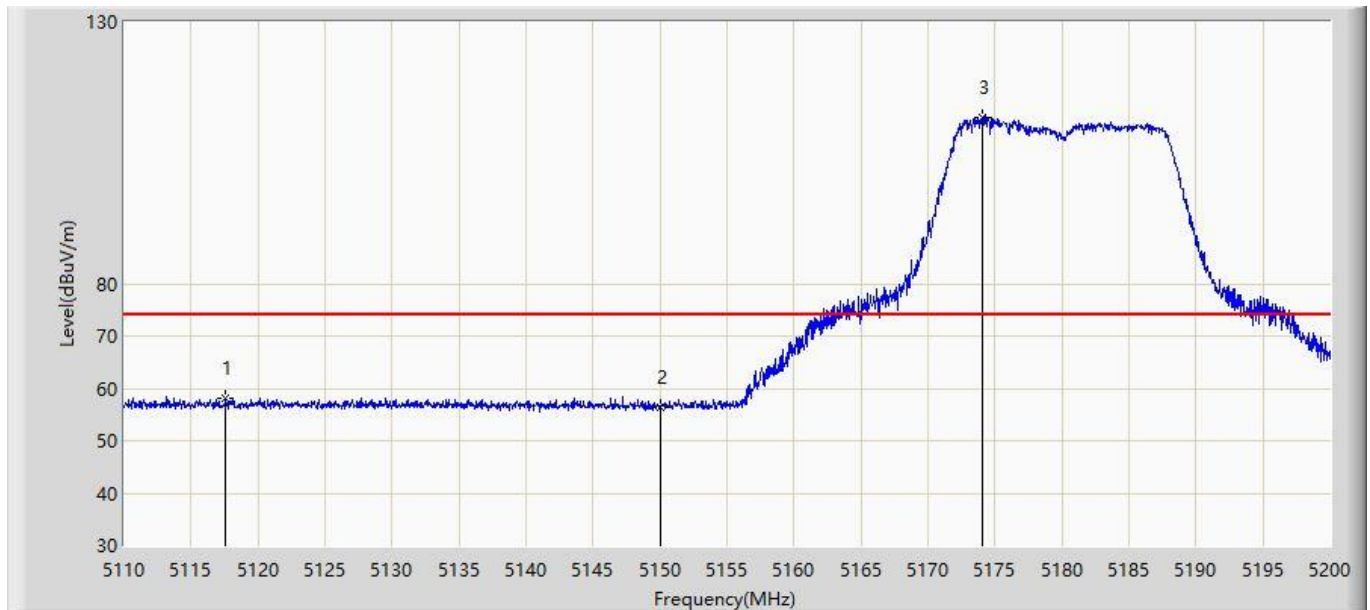


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5117.605	58.179	54.554	-15.821	74.000	3.625	PK
2			5150.000	56.357	52.711	-17.643	74.000	3.646	PK
3		*	5174.080	111.880	108.219	N/A	N/A	3.661	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

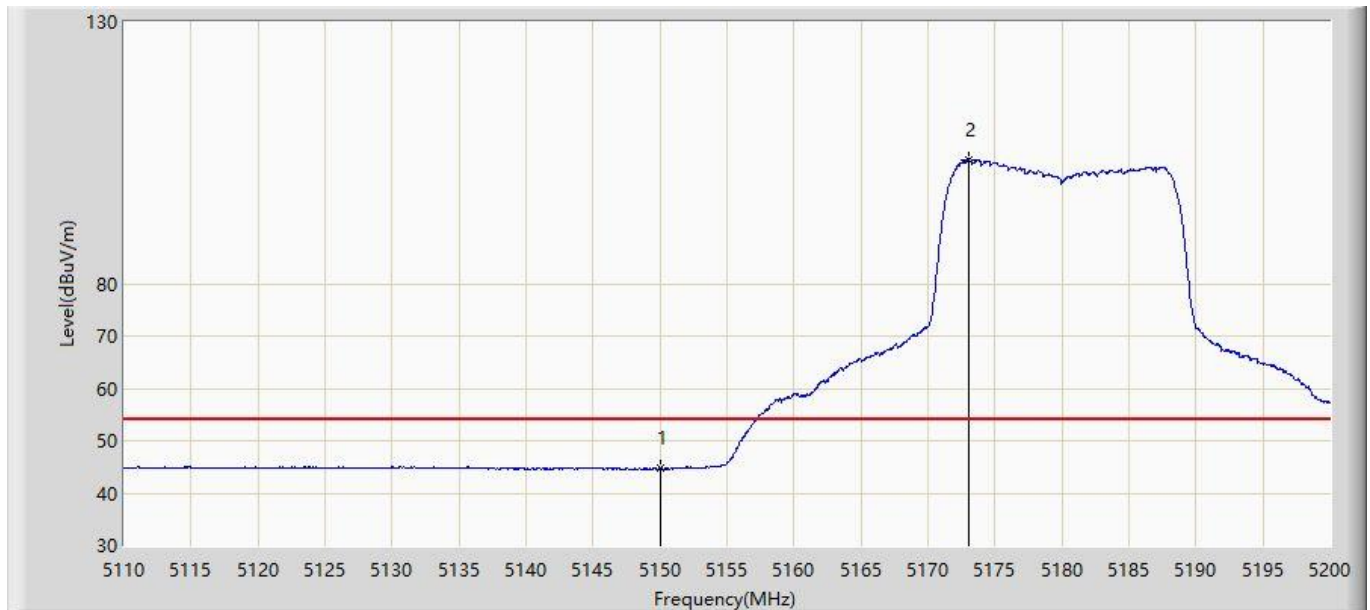


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.700	41.054	-9.300	54.000	3.646	AV
2		*	5173.045	103.768	100.108	N/A	N/A	3.660	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

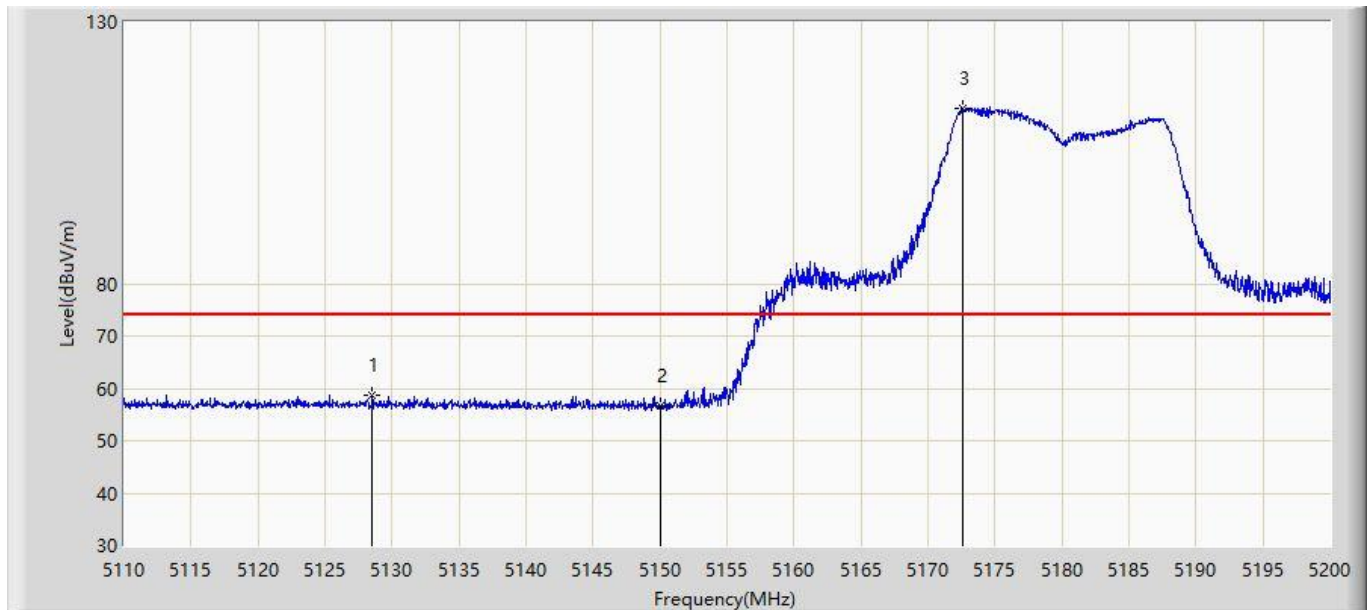


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5128.540	58.792	55.160	-15.208	74.000	3.632	PK
2			5150.000	56.656	53.010	-17.344	74.000	3.646	PK
3		*	5172.550	113.484	109.824	N/A	N/A	3.660	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

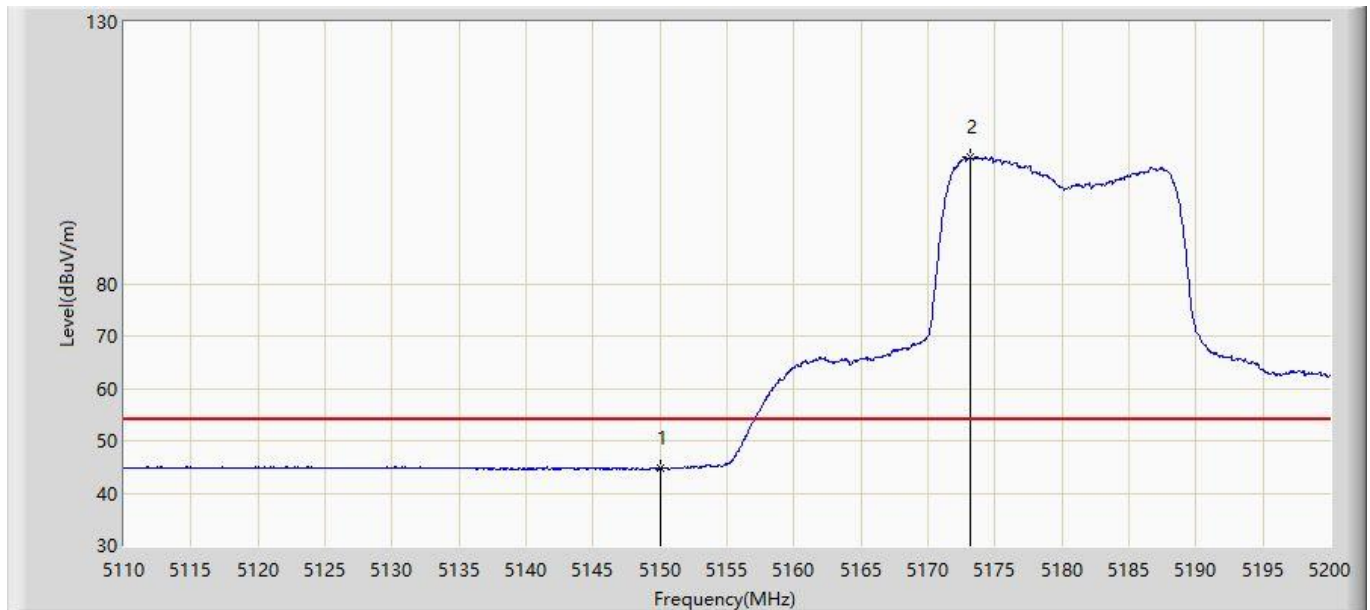


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.762	41.116	-9.238	54.000	3.646	AV
2		*	5173.180	104.096	100.436	N/A	N/A	3.660	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

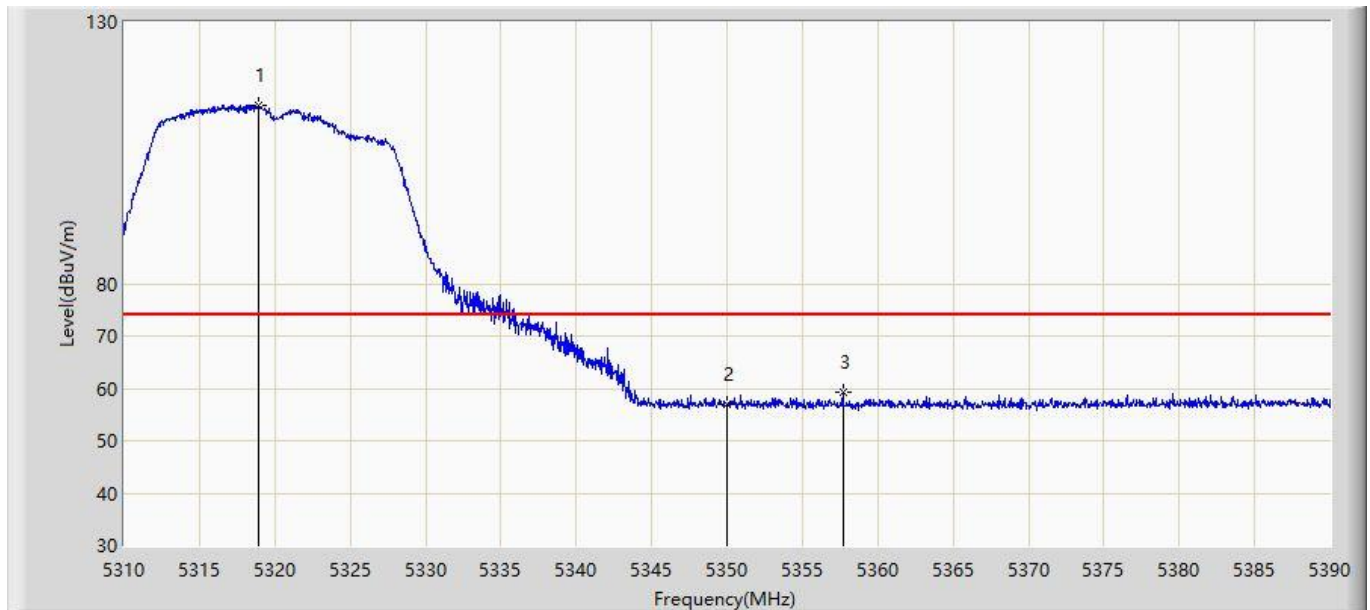


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.920	114.065	110.310	N/A	N/A	3.755	PK
2			5350.000	56.840	53.066	-17.160	74.000	3.774	PK
3			5357.680	59.243	55.464	-14.757	74.000	3.779	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

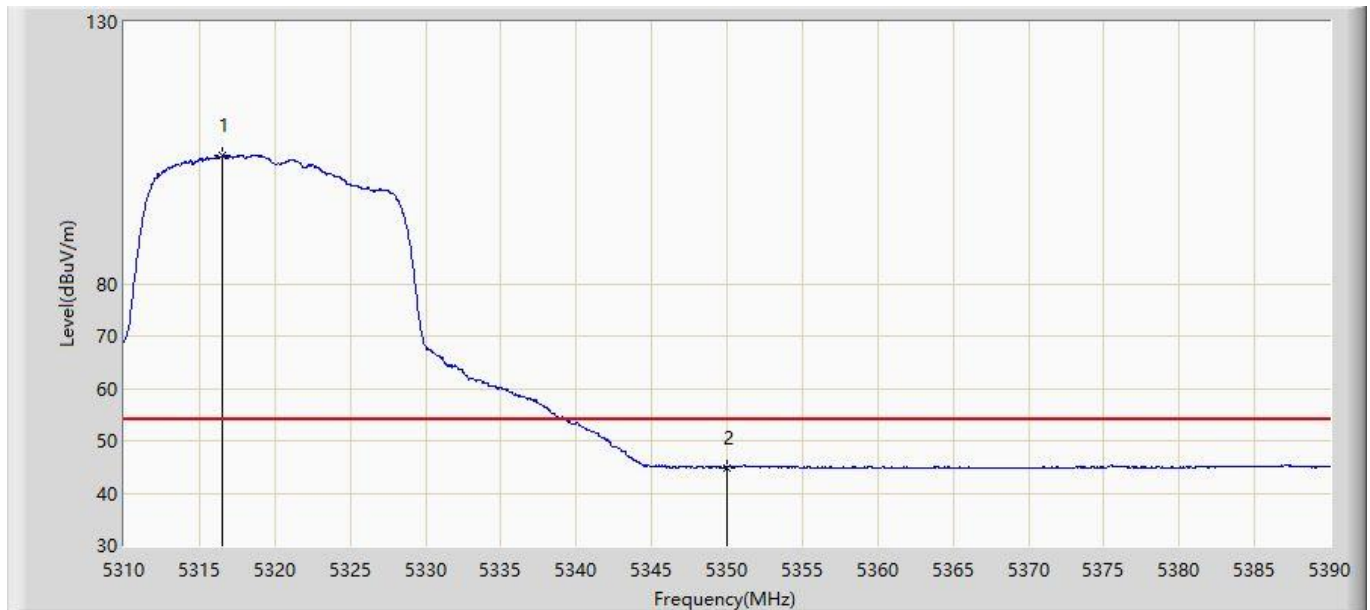


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.480	104.413	100.660	N/A	N/A	3.753	AV
2			5350.000	44.898	41.124	-9.102	54.000	3.774	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

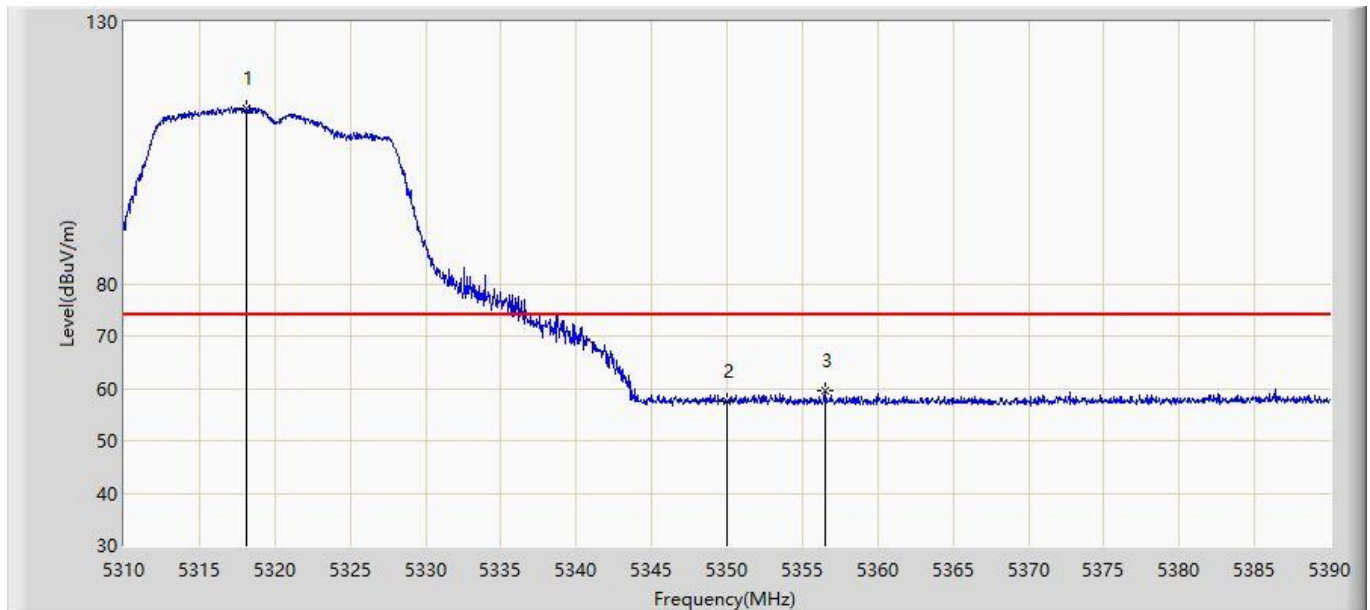


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.080	113.424	109.670	N/A	N/A	3.754	PK
2			5350.000	57.496	53.722	-16.504	74.000	3.774	PK
3			5356.480	59.447	55.669	-14.553	74.000	3.779	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

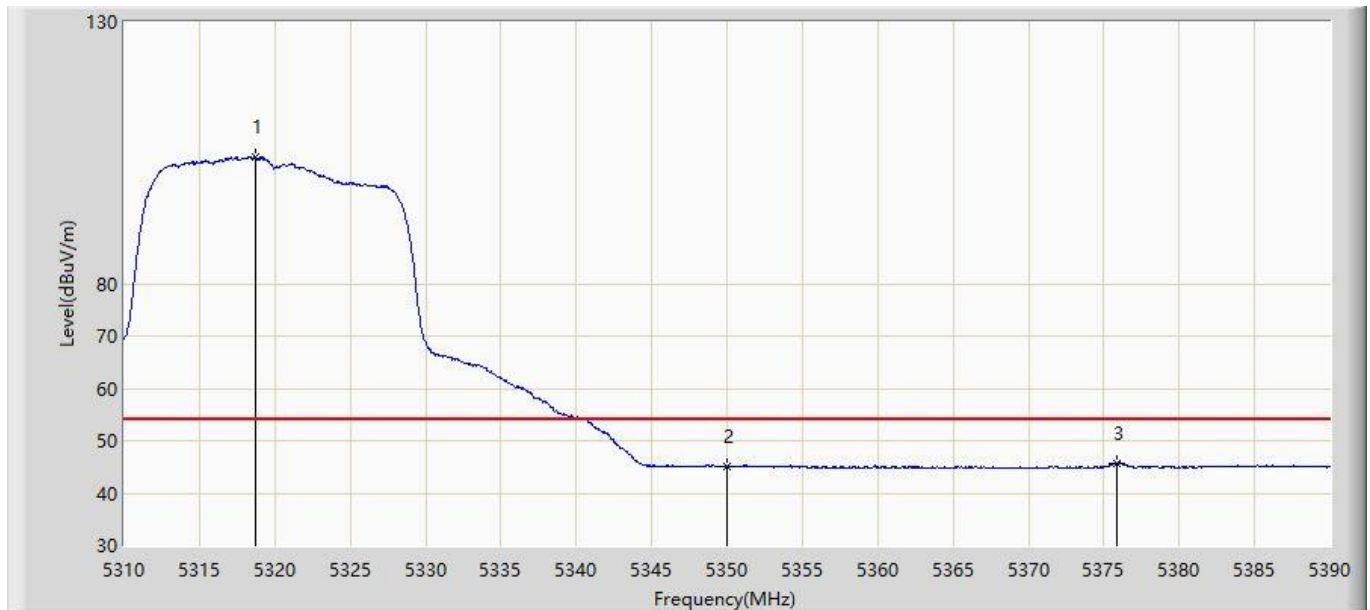


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.680	104.185	100.430	N/A	N/A	3.754	AV
2			5350.000	44.993	41.219	-9.007	54.000	3.774	AV
3			5375.880	45.738	41.947	-8.262	54.000	3.790	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1361D (CDD Mode)	

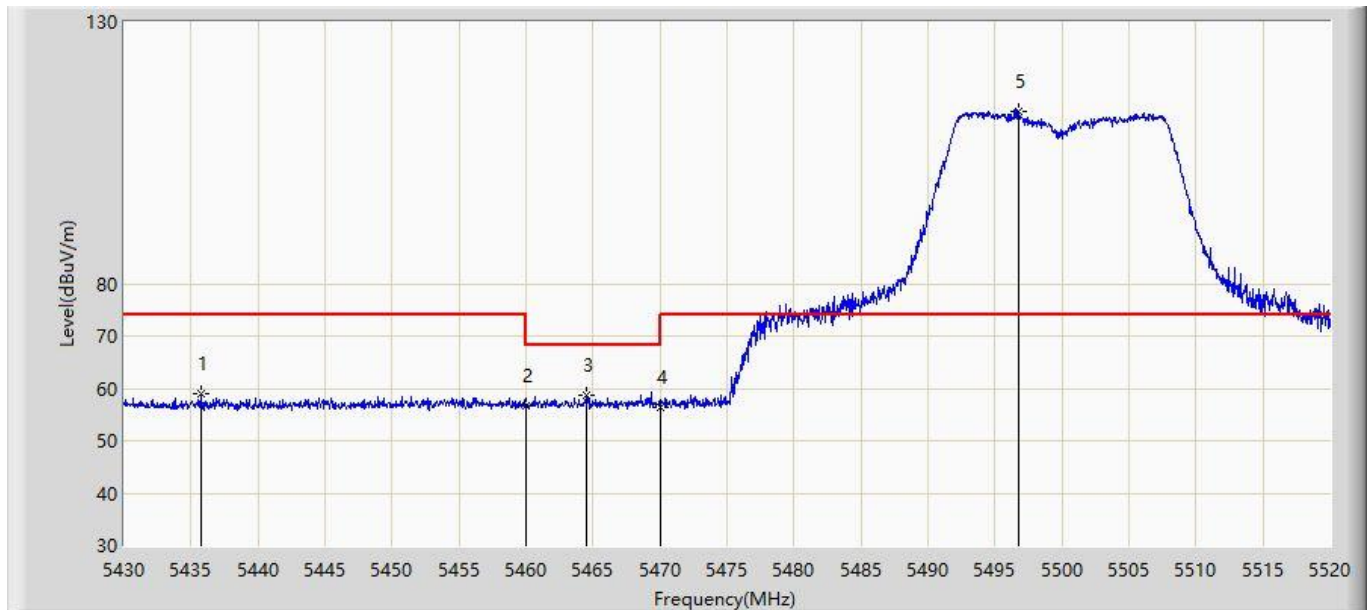


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5435.805	58.897	55.069	-15.103	74.000	3.828	PK
2			5460.000	56.697	52.853	-17.303	74.000	3.844	PK
3			5464.470	58.648	54.801	-9.552	68.200	3.847	PK
4			5470.000	56.482	52.631	-11.718	68.200	3.850	PK
5		*	5496.780	112.774	108.897	N/A	N/A	3.877	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1361D (CDD Mode)	

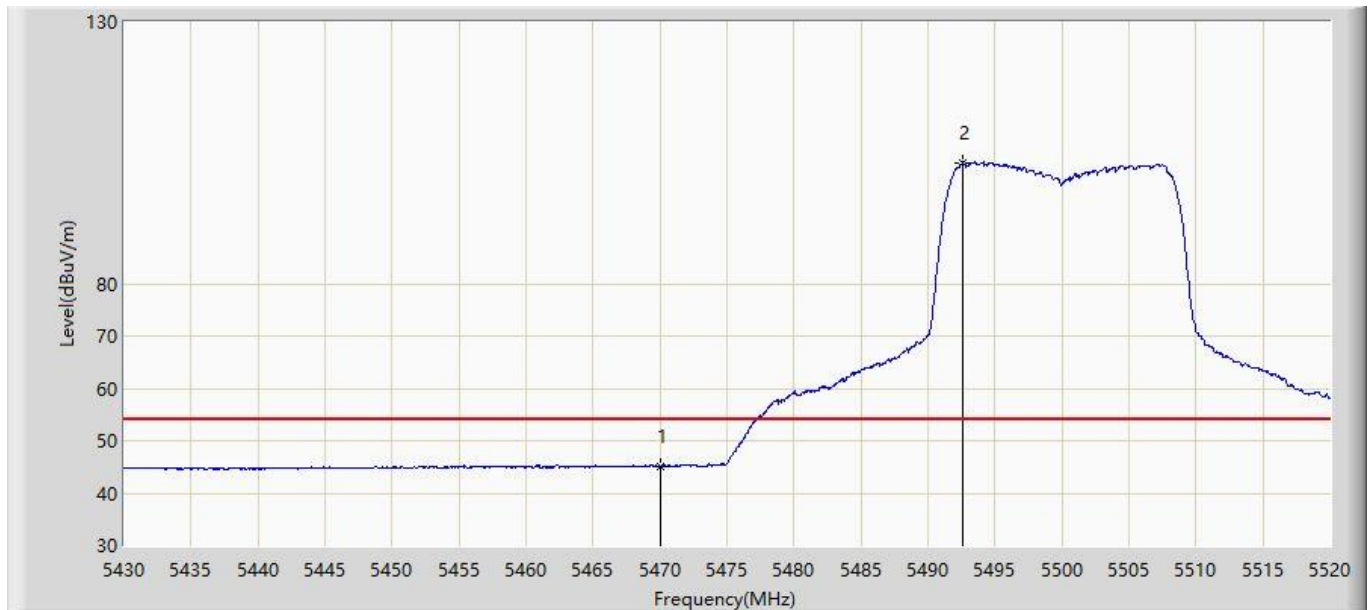


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5470.000	45.076	41.225	-8.924	54.000	3.850	AV
2		*	5492.595	103.185	99.315	N/A	N/A	3.871	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1361D (CDD Mode)	

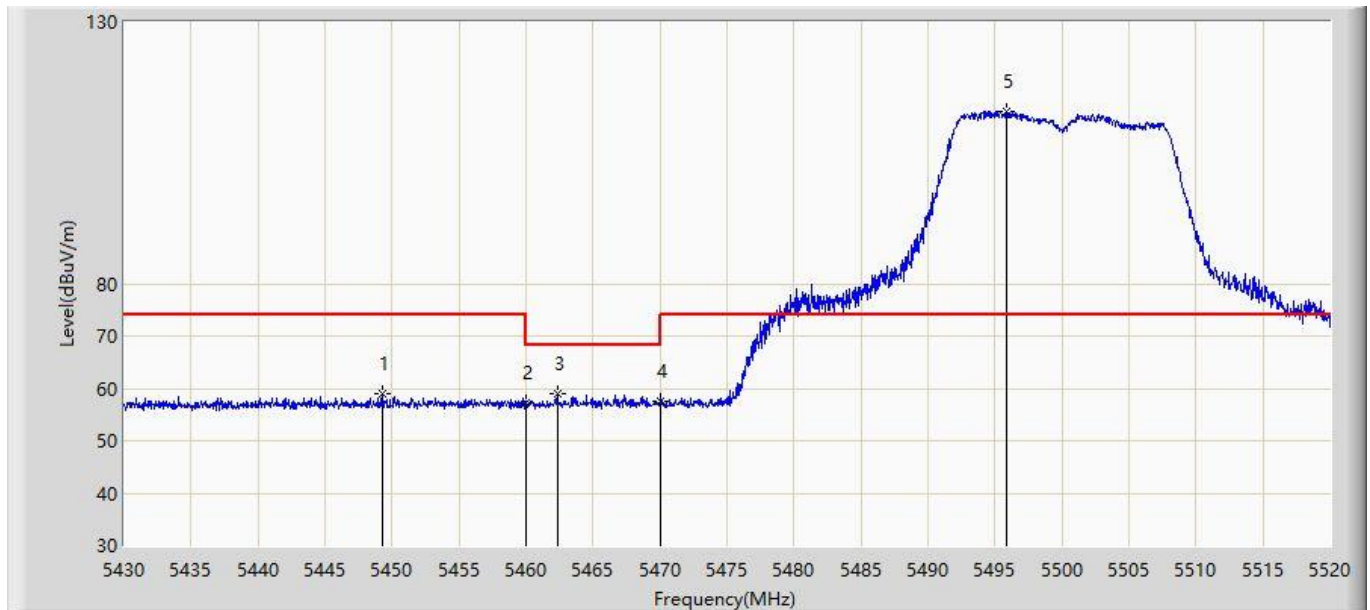

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.260	58.901	55.064	-15.099	74.000	3.837	PK
2			5460.000	57.185	53.341	-16.815	74.000	3.844	PK
3			5462.355	59.067	55.222	-9.133	68.200	3.845	PK
4			5470.000	57.533	53.682	-10.667	68.200	3.850	PK
5		*	5495.835	112.827	108.952	N/A	N/A	3.876	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 19:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5470.000	45.036	41.185	-8.964	54.000	3.850	AV
2		*	5496.600	102.861	98.984	N/A	N/A	3.876	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/25 - 20:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with OAW-AP1361D (CDD Mode)	

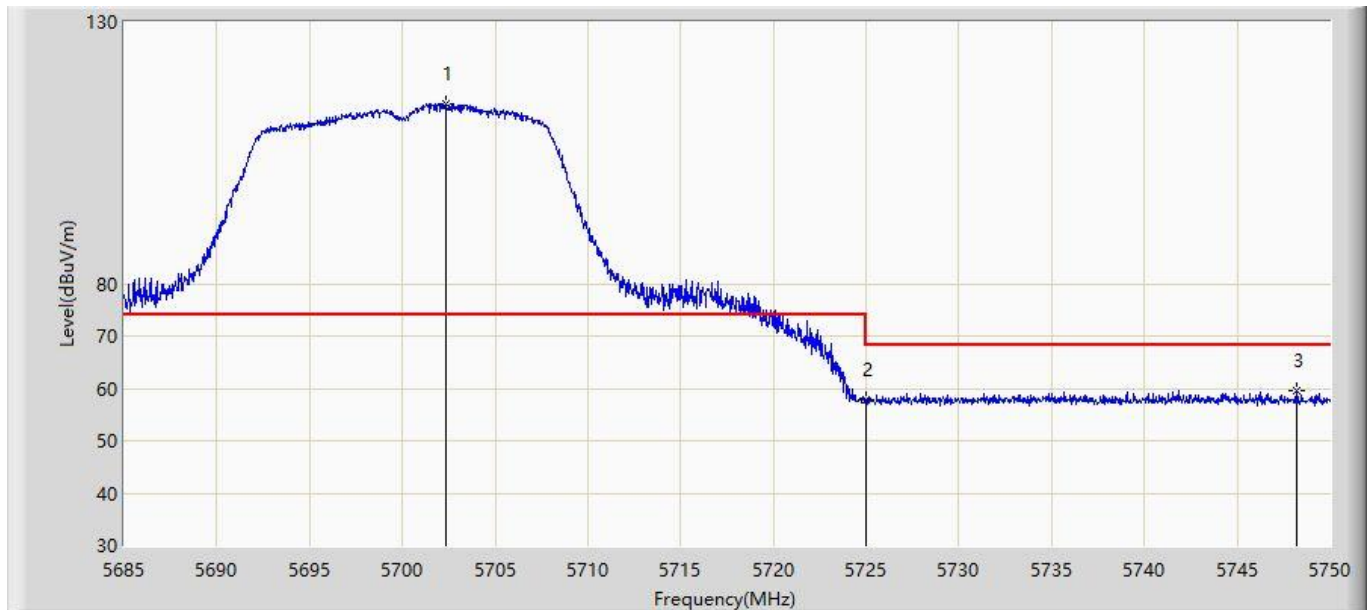


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.322	114.338	109.691	N/A	N/A	4.647	PK
2			5725.000	57.790	53.056	-10.410	68.200	4.734	PK
3			5748.180	59.695	54.872	-8.505	68.200	4.822	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with OAW-AP1361D (CDD Mode)	

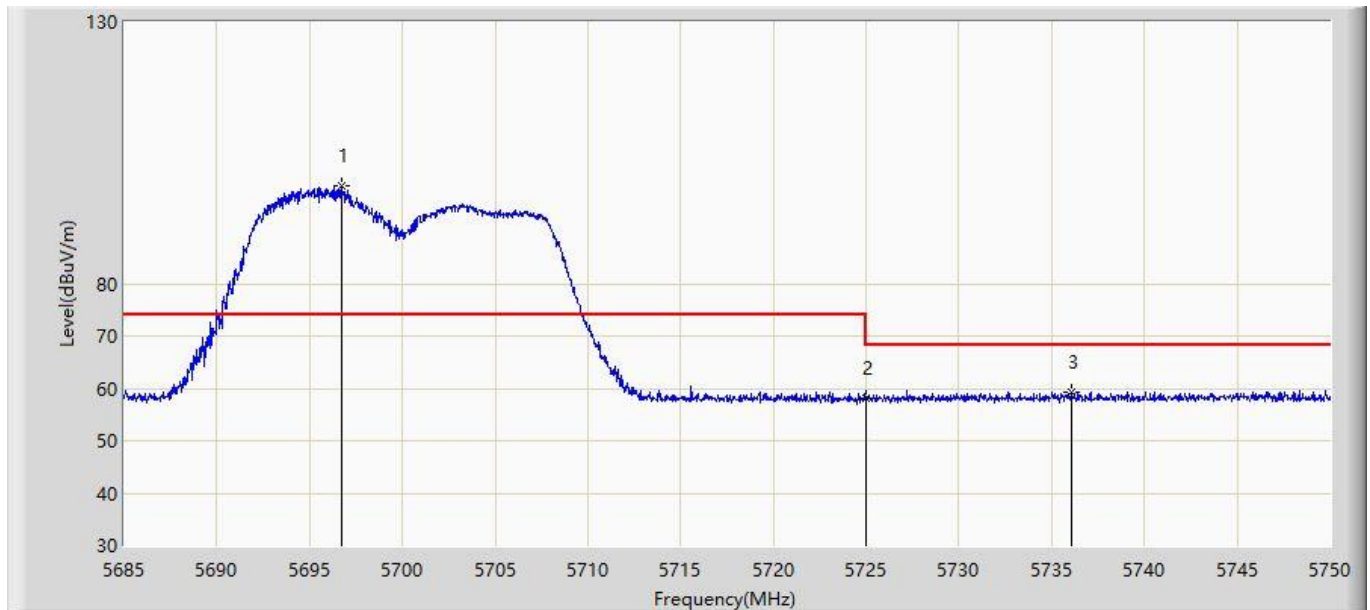


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.765	98.810	94.184	N/A	N/A	4.625	PK
2			5725.000	58.062	53.328	-10.138	68.200	4.734	PK
3			5736.090	59.369	54.593	-8.831	68.200	4.776	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1361D (CDD Mode)	

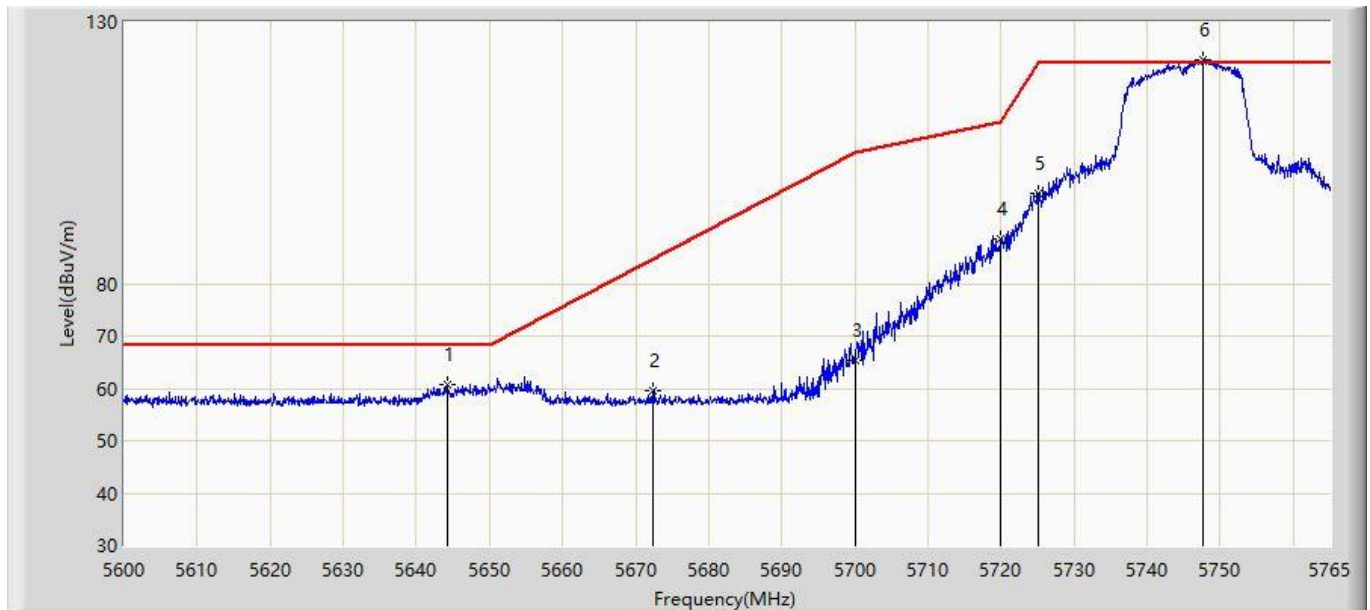


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.220	60.761	56.337	-7.439	68.200	4.425	PK
2			5672.353	59.469	54.937	-25.313	84.782	4.532	PK
3			5700.000	65.451	60.813	-39.749	105.200	4.638	PK
4			5720.000	88.596	83.881	-22.204	110.800	4.715	PK
5			5725.000	97.284	92.550	-24.916	122.200	4.734	PK
6		*	5747.592	122.852	118.032	N/A	N/A	4.820	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1361D (CDD Mode)	

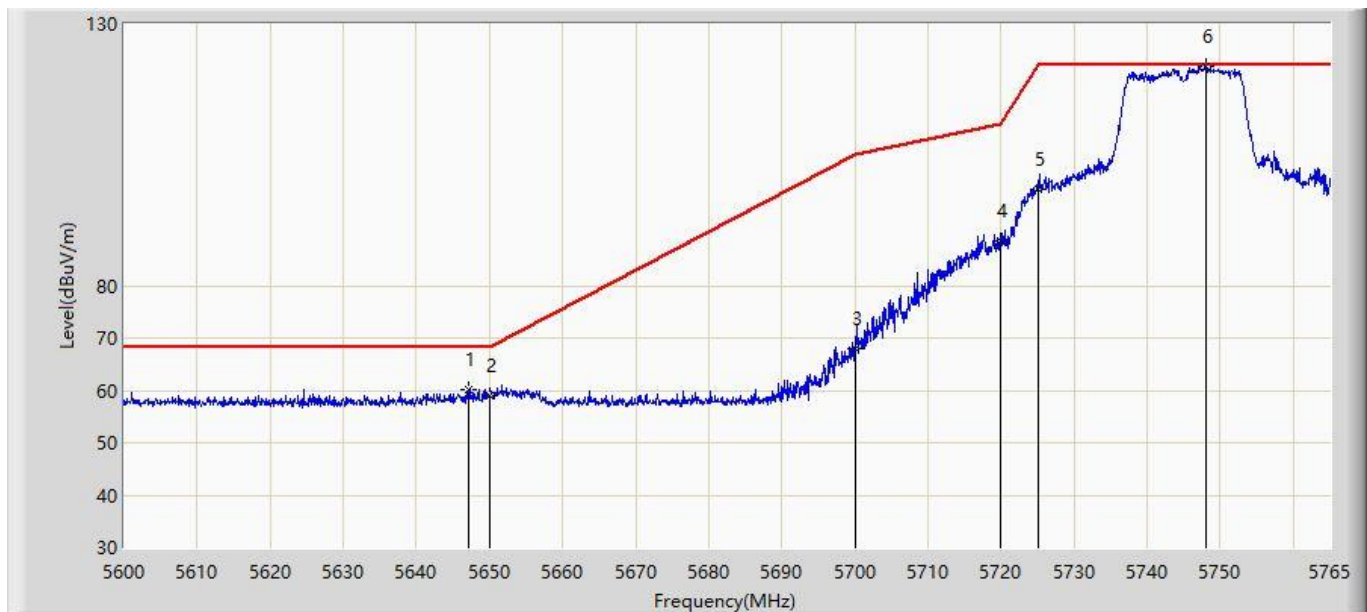


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5647.107	60.219	55.784	-7.981	68.200	4.436	PK
2			5650.000	58.929	54.483	-9.271	68.200	4.446	PK
3			5700.000	68.014	63.376	-37.186	105.200	4.638	PK
4			5720.000	88.650	83.935	-22.150	110.800	4.715	PK
5			5725.000	98.396	93.662	-23.804	122.200	4.734	PK
6		*	5748.087	121.843	117.021	N/A	N/A	4.822	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1361D (CDD Mode)	

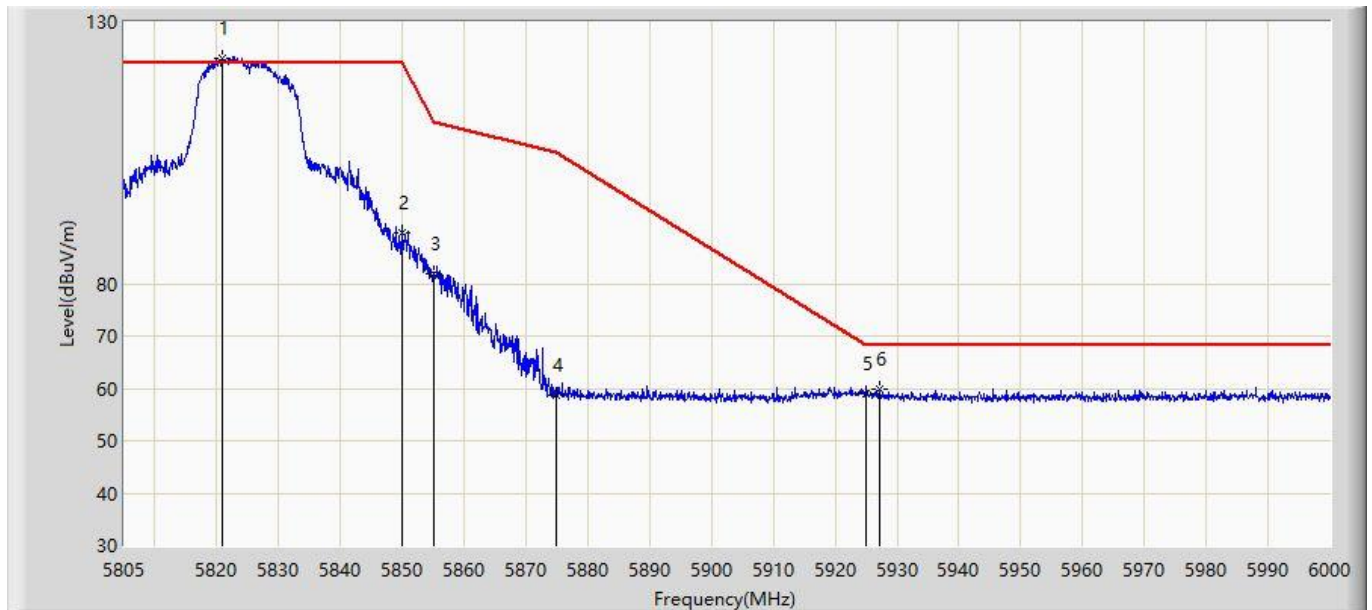


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.990	123.069	117.966	N/A	N/A	5.103	PK
2			5850.000	89.597	84.383	-32.603	122.200	5.214	PK
3			5855.000	81.822	76.589	-28.978	110.800	5.233	PK
4			5875.000	58.628	53.318	-46.572	105.200	5.310	PK
5			5925.000	58.929	53.427	-9.271	68.200	5.502	PK
6			5927.070	59.917	54.407	-8.283	68.200	5.511	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1361D (CDD Mode)	

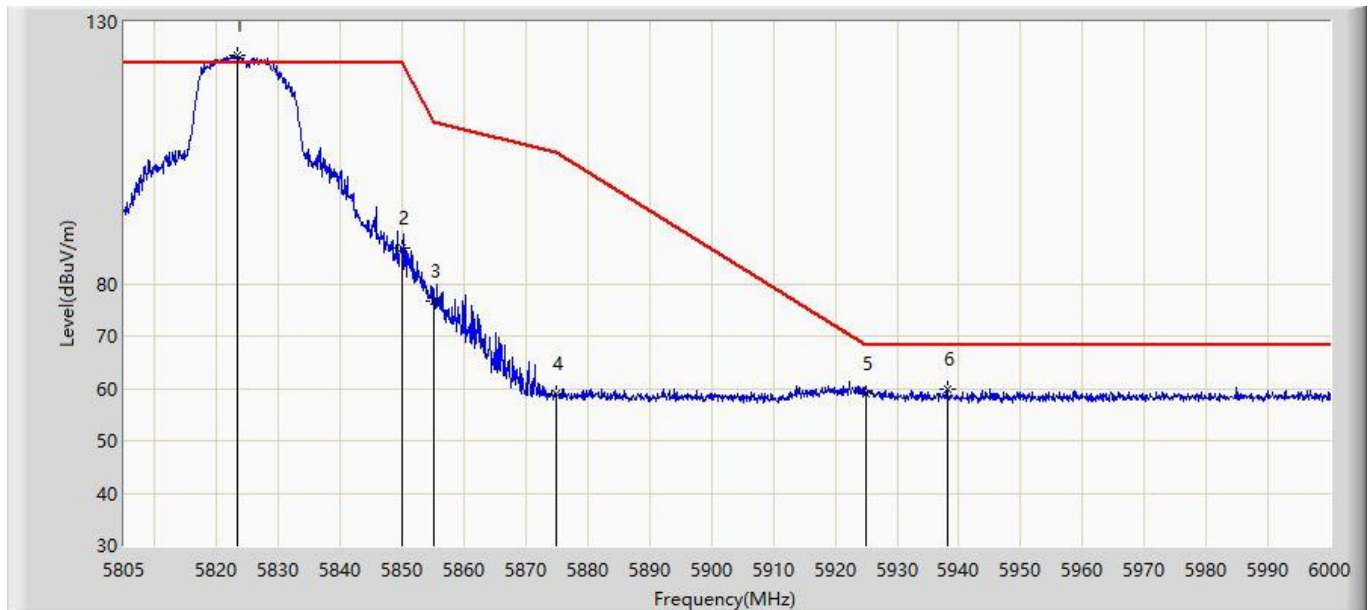


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.428	123.528	118.416	N/A	N/A	5.112	PK
2			5850.000	86.794	81.580	-35.406	122.200	5.214	PK
3			5855.000	76.786	71.553	-34.014	110.800	5.233	PK
4			5875.000	59.022	53.712	-46.178	105.200	5.310	PK
5			5925.000	58.870	53.368	-9.330	68.200	5.502	PK
6			5938.087	59.885	54.332	-8.315	68.200	5.553	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

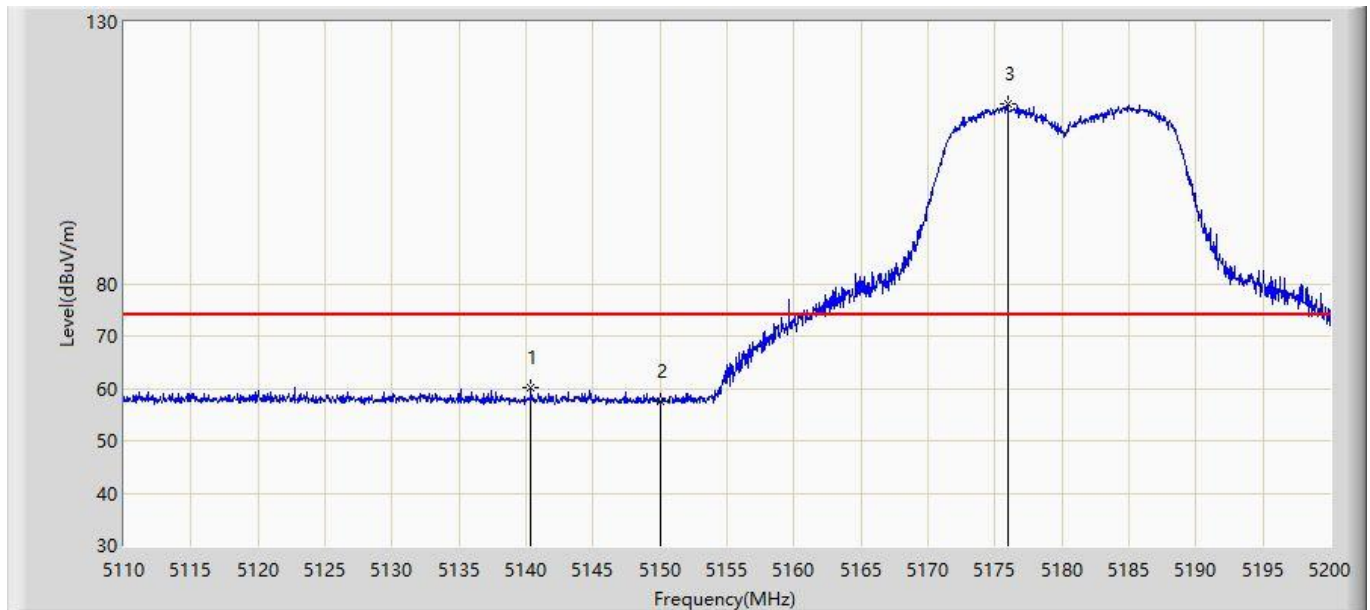

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.375	60.106	56.466	-13.894	74.000	3.641	PK
2			5150.000	57.447	53.801	-16.553	74.000	3.646	PK
3		*	5175.970	114.278	110.616	N/A	N/A	3.662	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.444	41.798	-8.556	54.000	3.646	AV
2		*	5176.420	104.089	100.426	N/A	N/A	3.663	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

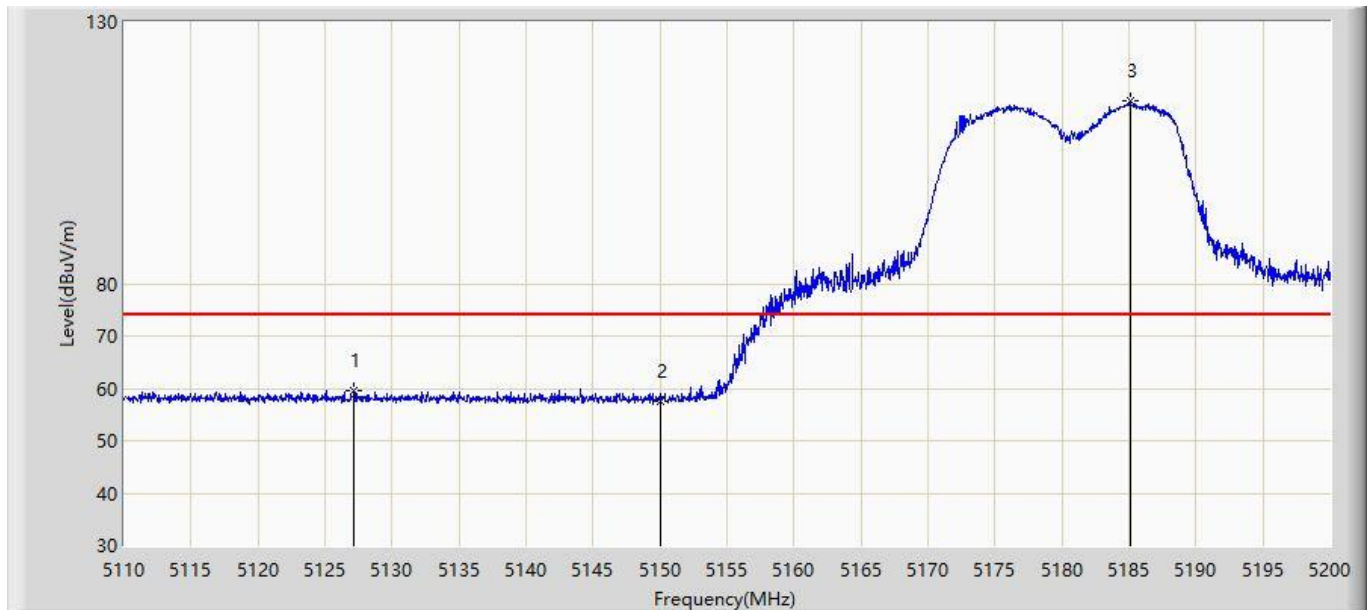


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.190	59.672	56.041	-14.328	74.000	3.632	PK
2			5150.000	57.549	53.903	-16.451	74.000	3.646	PK
3		*	5185.105	114.791	111.123	N/A	N/A	3.669	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

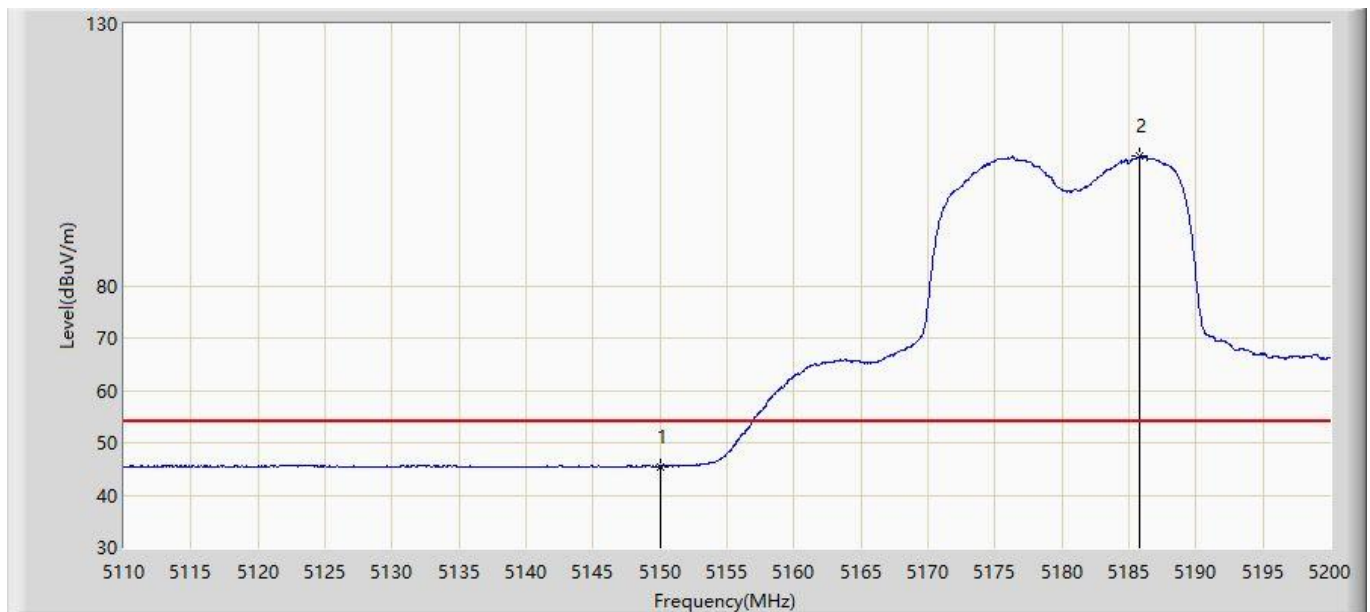


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.504	41.858	-8.496	54.000	3.646	AV
2		*	5185.825	104.732	101.063	N/A	N/A	3.669	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

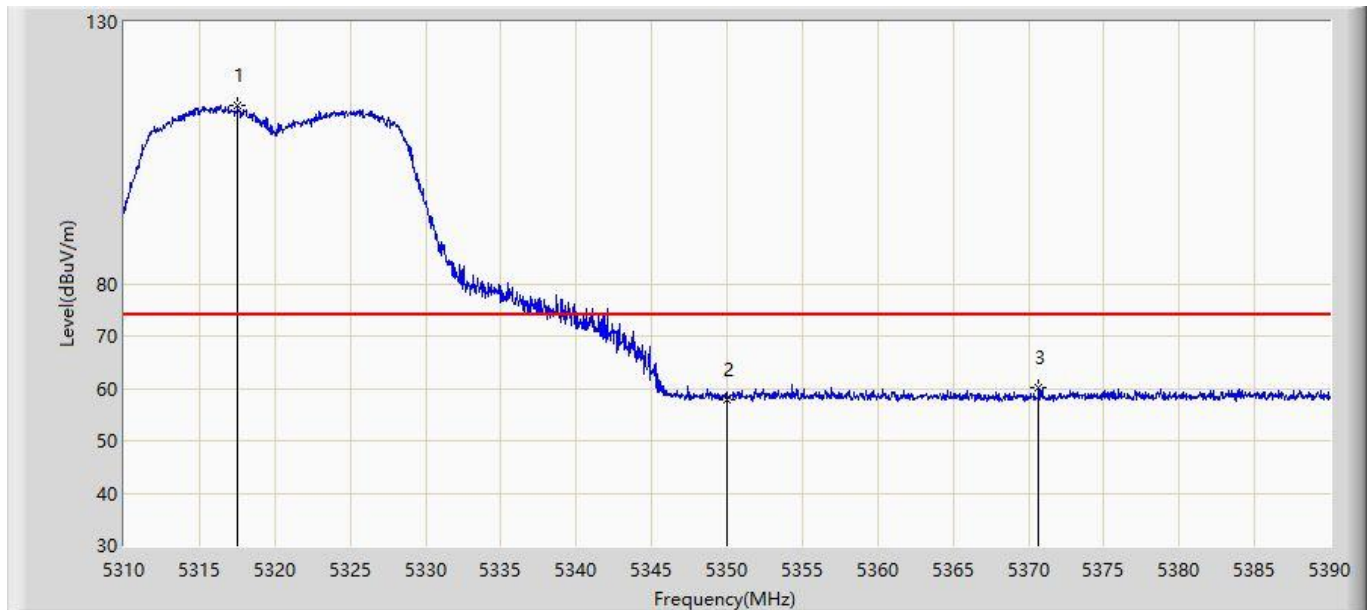


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.560	114.165	110.411	N/A	N/A	3.754	PK
2			5350.000	57.745	53.971	-16.255	74.000	3.774	PK
3			5370.680	60.251	56.464	-13.749	74.000	3.788	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

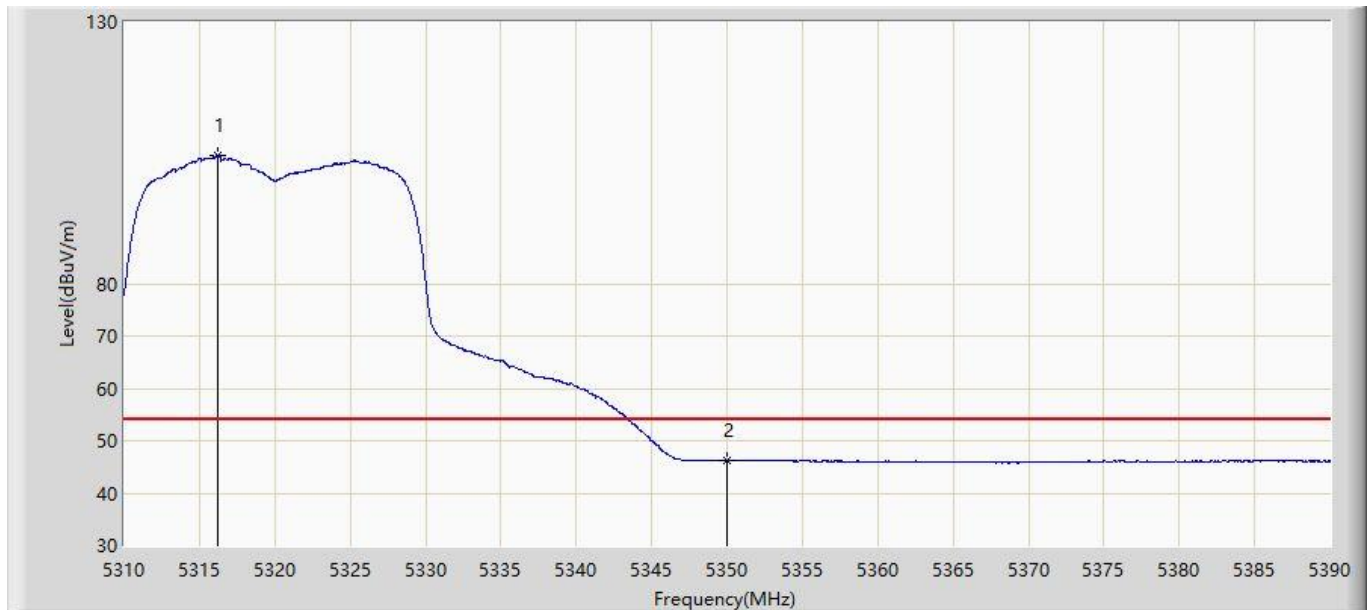


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.240	104.386	100.633	N/A	N/A	3.753	AV
2			5350.000	46.234	42.460	-7.766	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

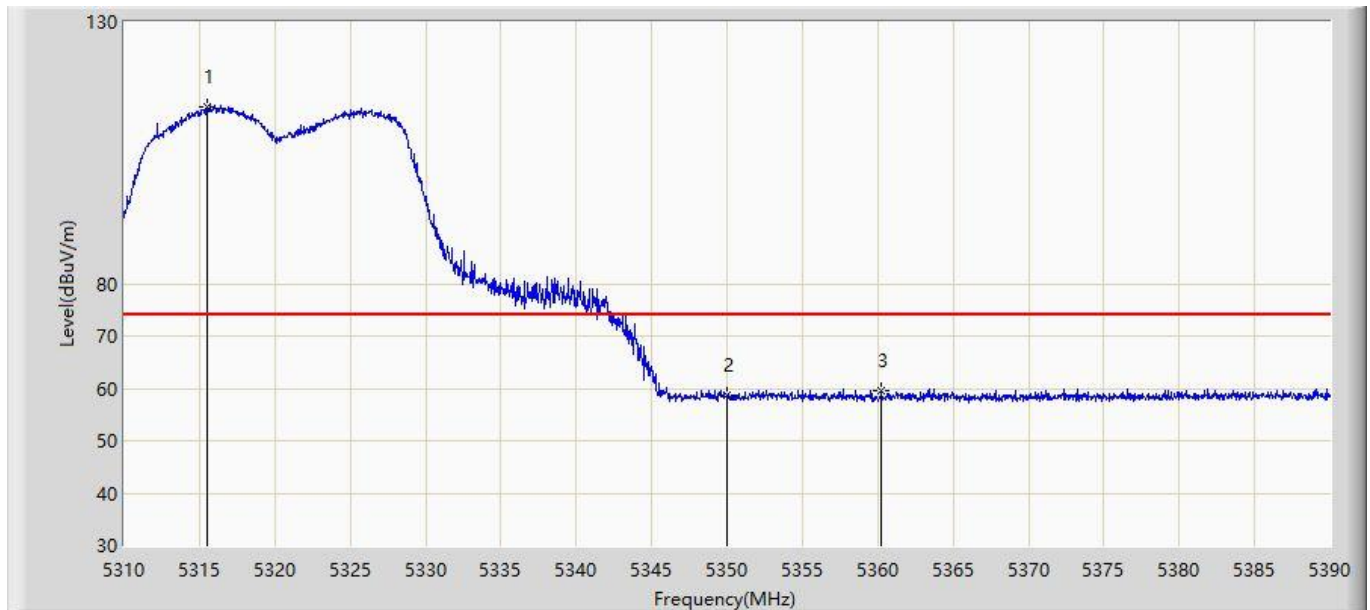


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.560	113.893	110.141	N/A	N/A	3.753	PK
2			5350.000	58.632	54.858	-15.368	74.000	3.774	PK
3			5360.240	59.669	55.889	-14.331	74.000	3.781	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 09:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

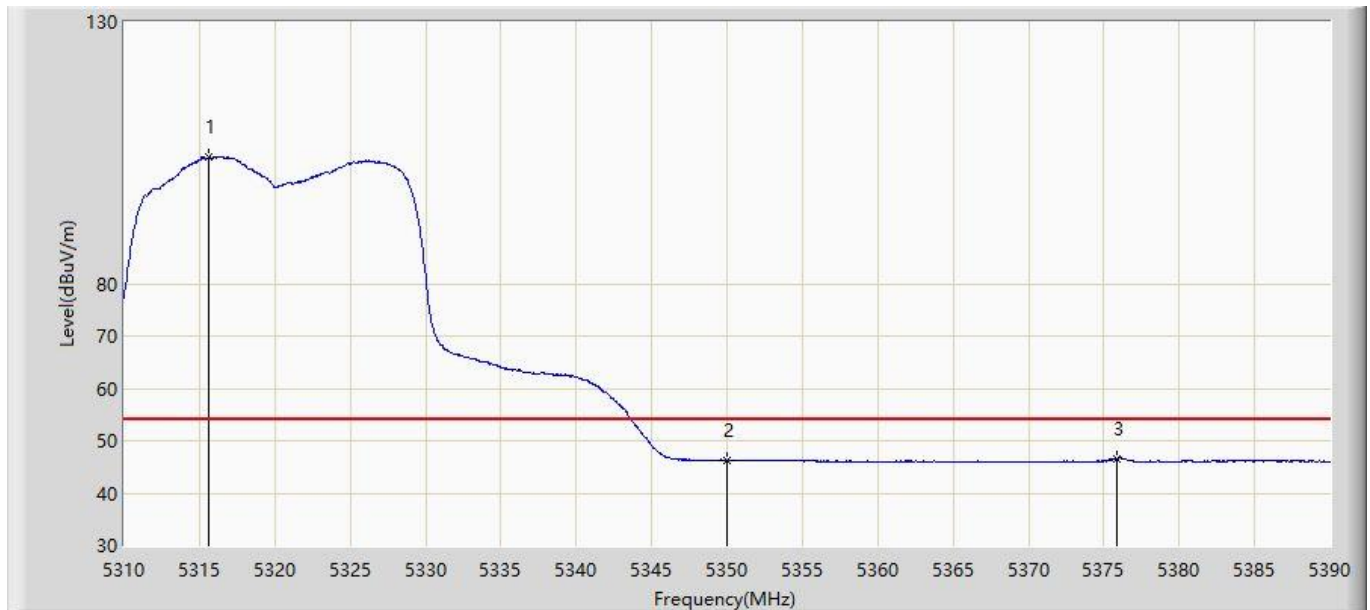


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.640	104.088	100.336	N/A	N/A	3.753	AV
2			5350.000	46.277	42.503	-7.723	54.000	3.774	AV
3			5375.880	46.664	42.873	-7.336	54.000	3.790	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361D (CDD Mode)	

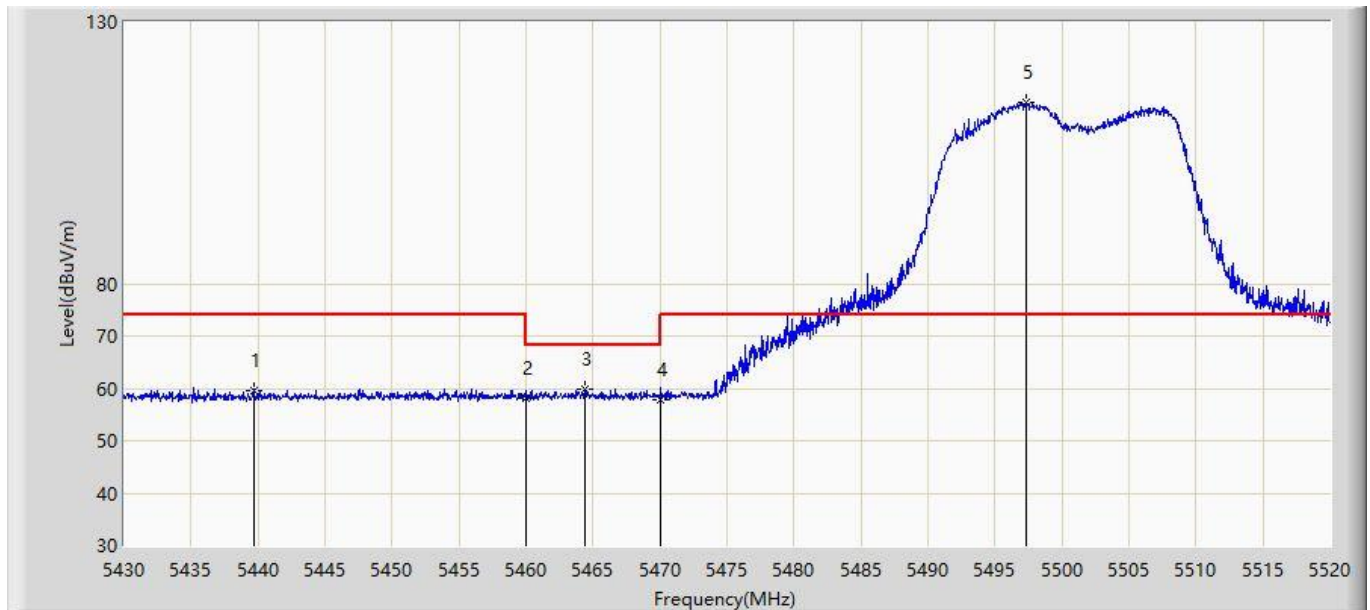

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5439.675	59.707	55.876	-14.293	74.000	3.831	PK
2			5460.000	58.242	54.398	-15.758	74.000	3.844	PK
3			5464.425	59.720	55.873	-8.480	68.200	3.847	PK
4			5470.000	57.967	54.116	-10.233	68.200	3.850	PK
5		*	5497.320	114.730	110.852	N/A	N/A	3.877	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5470.000	46.061	42.210	-7.939	54.000	3.850	AV
2		*	5497.725	104.732	100.854	N/A	N/A	3.877	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361D (CDD Mode)	

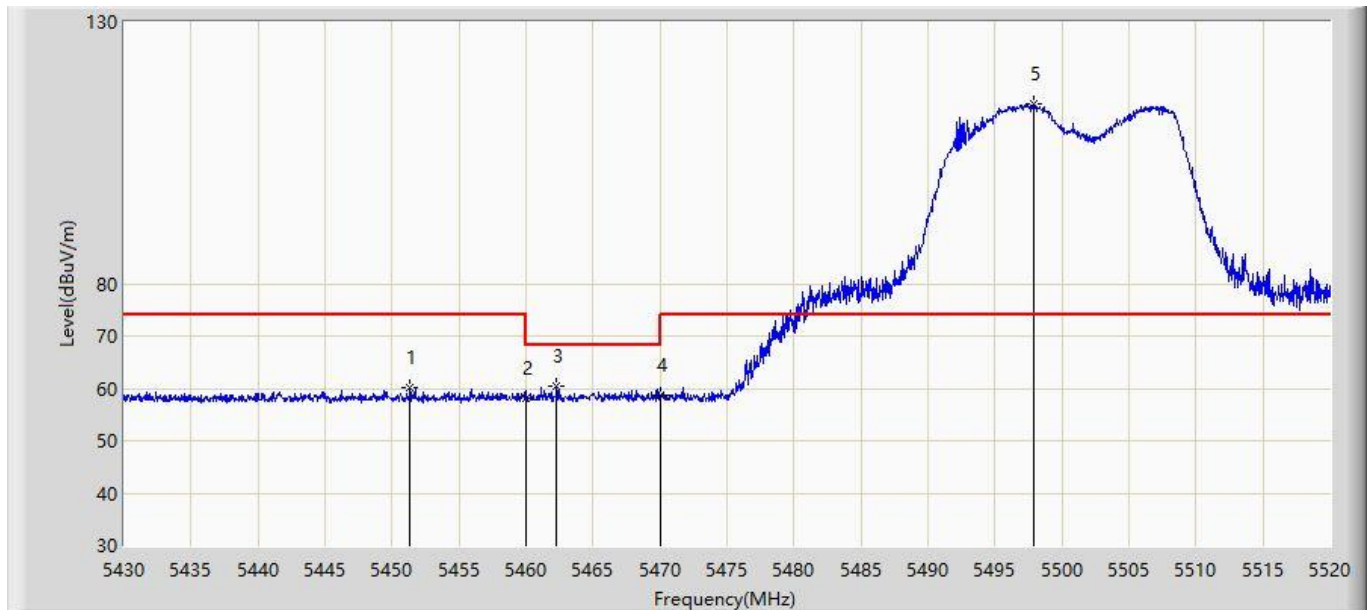

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.330	60.037	56.199	-13.963	74.000	3.838	PK
2			5460.000	58.193	54.349	-15.807	74.000	3.844	PK
3			5462.310	60.336	56.491	-7.864	68.200	3.845	PK
4			5470.000	58.731	54.880	-9.469	68.200	3.850	PK
5		*	5497.860	114.329	110.450	N/A	N/A	3.879	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5470.000	46.139	42.288	-7.861	54.000	3.850	AV
2		*	5496.600	104.353	100.476	N/A	N/A	3.876	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1361D (CDD Mode)	

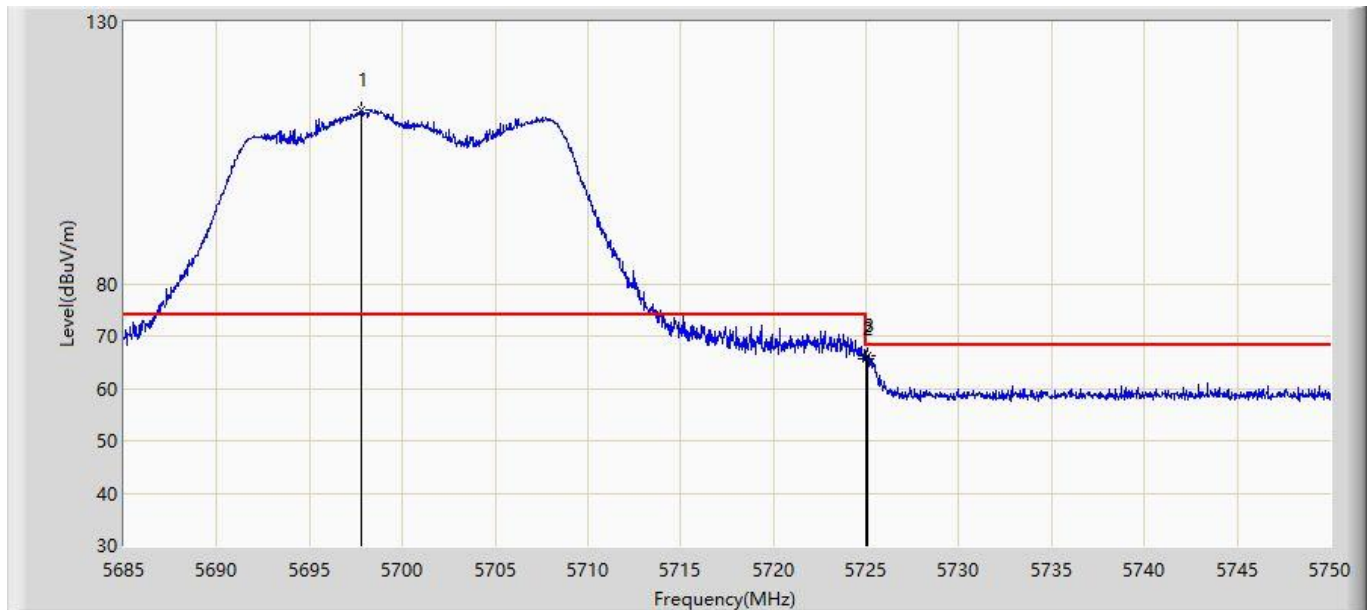


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.772	113.143	108.514	N/A	N/A	4.629	PK
2			5725.000	65.790	61.056	-2.410	68.200	4.734	PK
3			5725.072	66.208	61.474	-1.992	68.200	4.734	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1361D (CDD Mode)	

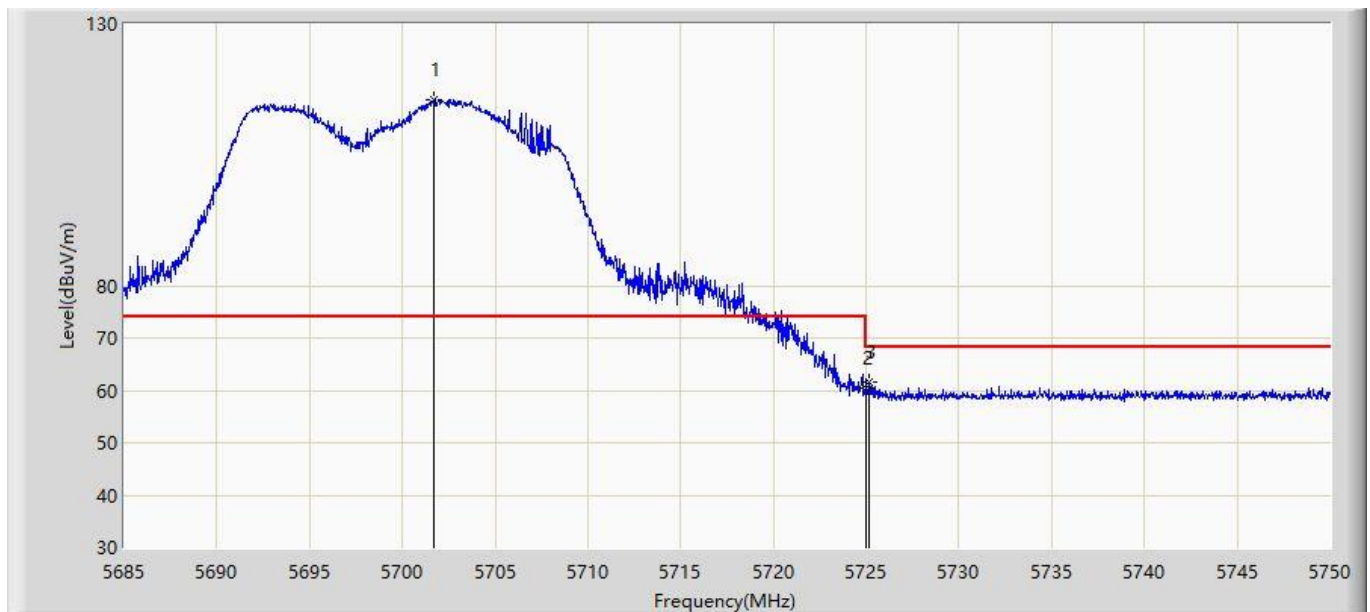


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.705	115.565	110.920	N/A	N/A	4.644	PK
2			5725.000	60.486	55.752	-7.714	68.200	4.734	PK
3			5725.170	61.662	56.928	-6.538	68.200	4.734	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1361D (CDD Mode)	

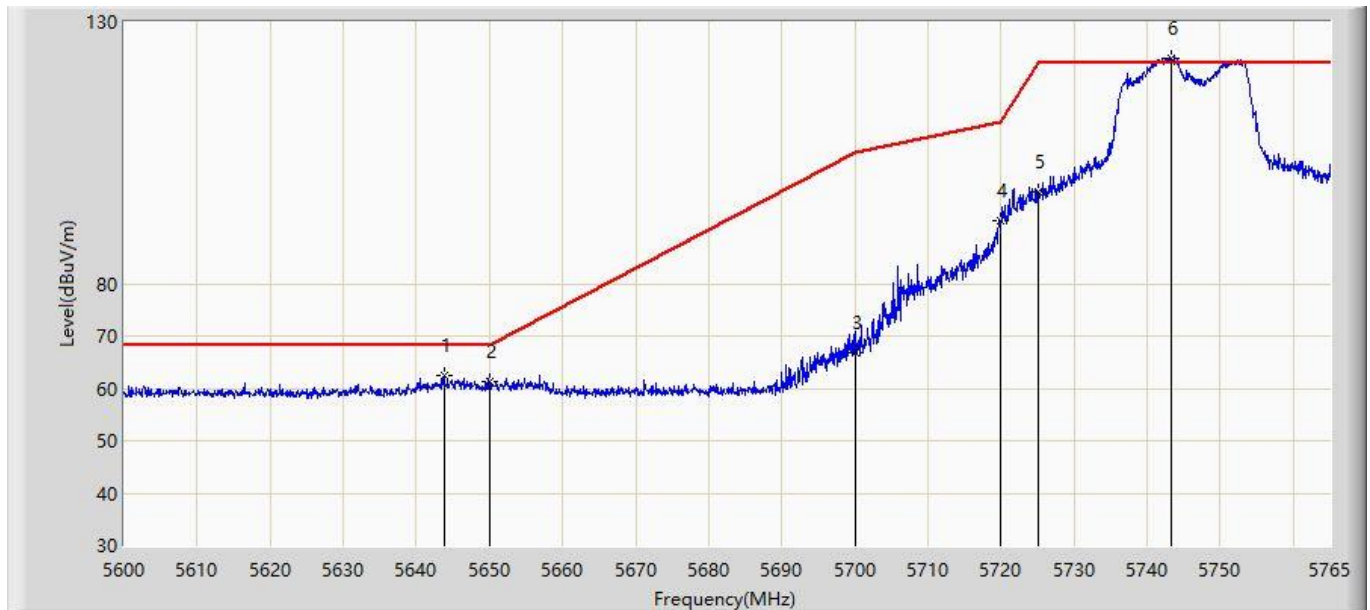


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5643.808	62.494	58.071	-5.706	68.200	4.422	PK
2			5650.000	61.177	56.731	-7.023	68.200	4.446	PK
3			5700.000	66.808	62.170	-38.392	105.200	4.638	PK
4			5720.000	91.910	87.195	-18.890	110.800	4.715	PK
5			5725.000	97.447	92.713	-24.753	122.200	4.734	PK
6		*	5743.385	123.153	118.349	N/A	N/A	4.804	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1361D (CDD Mode)	

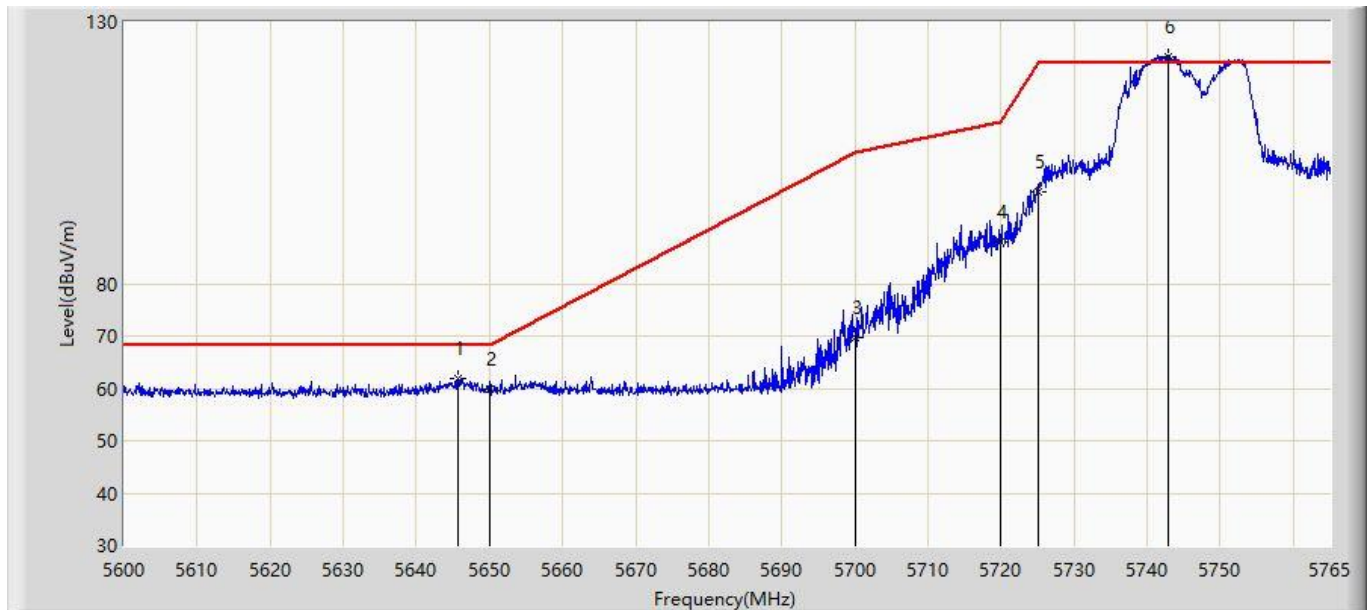


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5645.705	61.925	57.495	-6.275	68.200	4.430	PK
2			5650.000	59.813	55.367	-8.387	68.200	4.446	PK
3			5700.000	69.673	65.035	-35.527	105.200	4.638	PK
4			5720.000	87.854	83.139	-22.946	110.800	4.715	PK
5			5725.000	97.656	92.922	-24.544	122.200	4.734	PK
6		*	5742.808	123.369	118.567	N/A	N/A	4.803	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1361D (CDD Mode)	

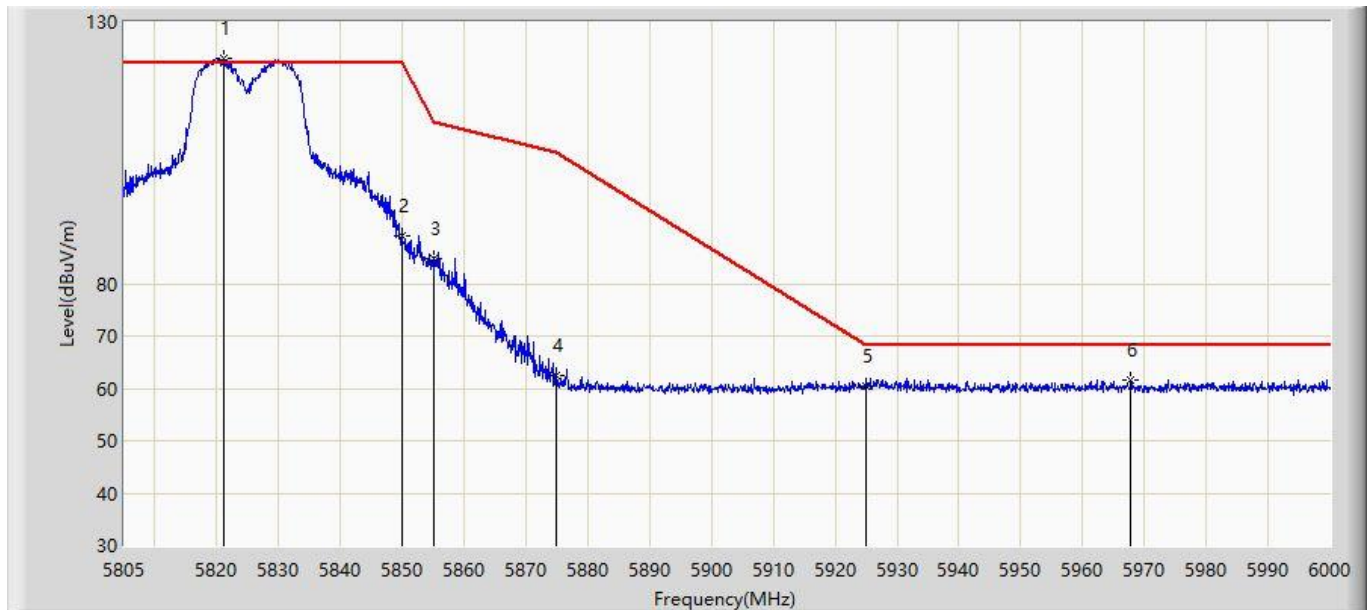


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.087	123.117	118.014	N/A	N/A	5.103	PK
2			5850.000	89.196	83.982	-33.004	122.200	5.214	PK
3			5855.000	84.835	79.602	-25.965	110.800	5.233	PK
4			5875.000	62.501	57.191	-42.699	105.200	5.310	PK
5			5925.000	60.490	54.988	-7.710	68.200	5.502	PK
6			5967.728	61.632	55.966	-6.568	68.200	5.666	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1361D (CDD Mode)	

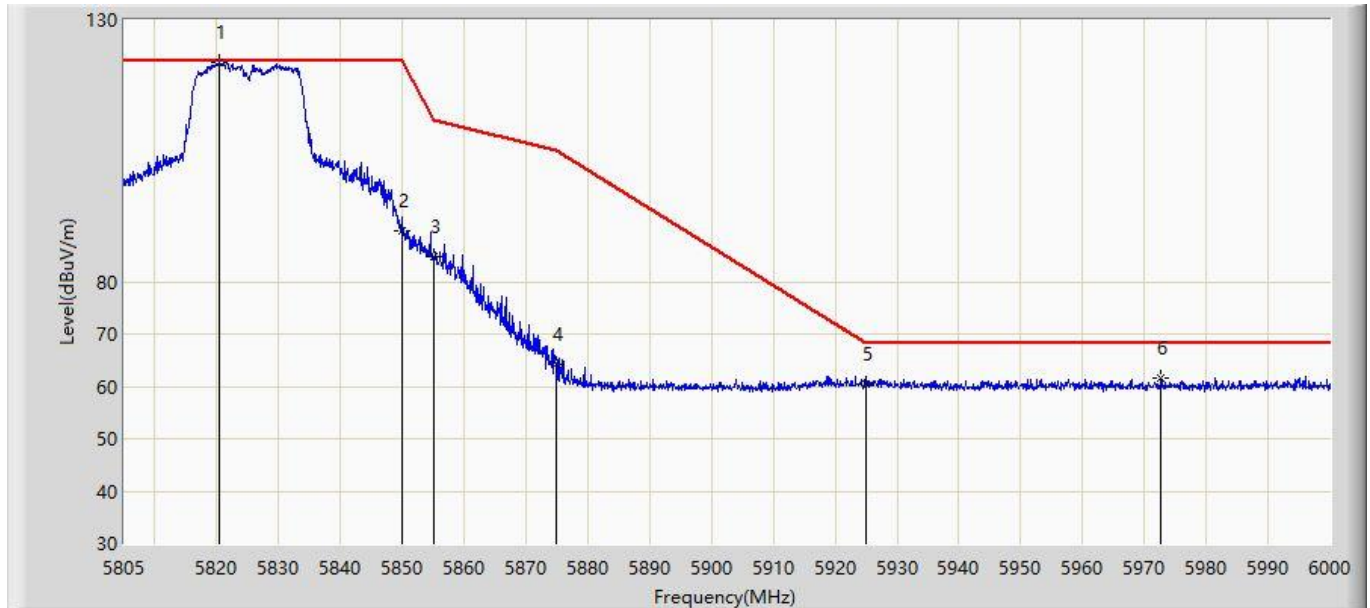


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.405	121.944	116.843	N/A	N/A	5.101	PK
2			5850.000	89.766	84.552	-32.434	122.200	5.214	PK
3			5855.000	84.656	79.423	-26.144	110.800	5.233	PK
4			5875.000	64.098	58.788	-41.102	105.200	5.310	PK
5			5925.000	60.422	54.920	-7.778	68.200	5.502	PK
6			5972.700	61.526	55.841	-6.674	68.200	5.685	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361D (CDD Mode)	

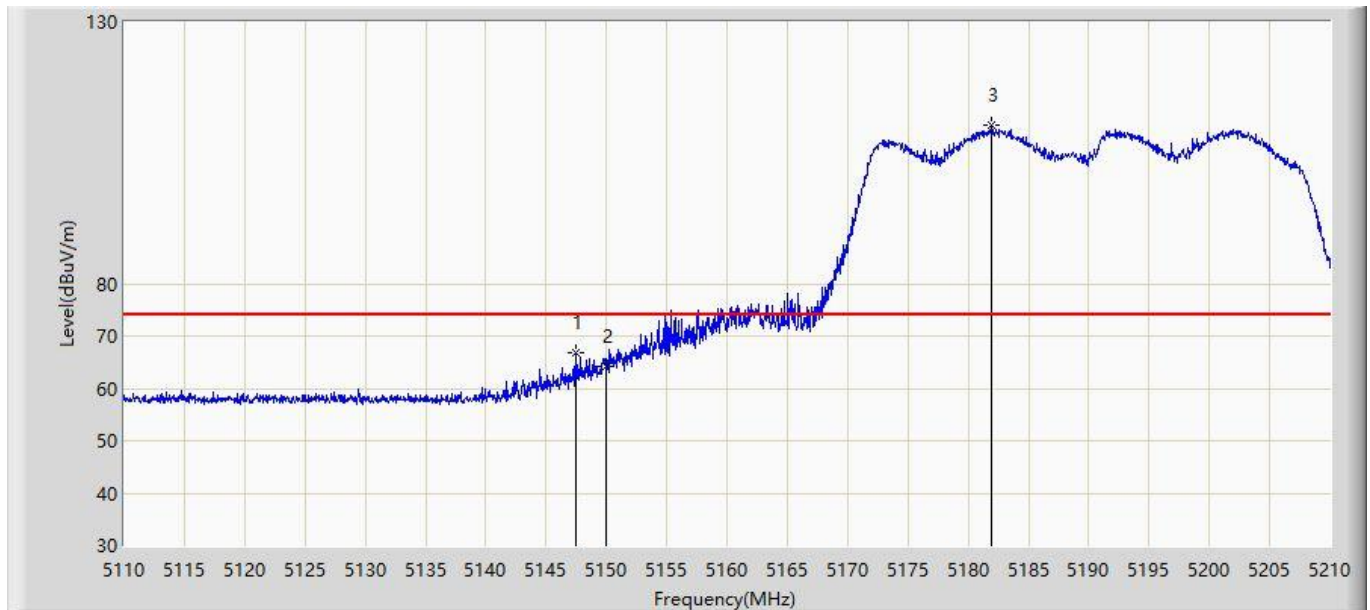


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.500	66.697	63.052	-7.303	74.000	3.645	PK
2			5150.000	64.305	60.659	-9.695	74.000	3.646	PK
3		*	5181.950	110.232	106.566	N/A	N/A	3.666	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361D (CDD Mode)	

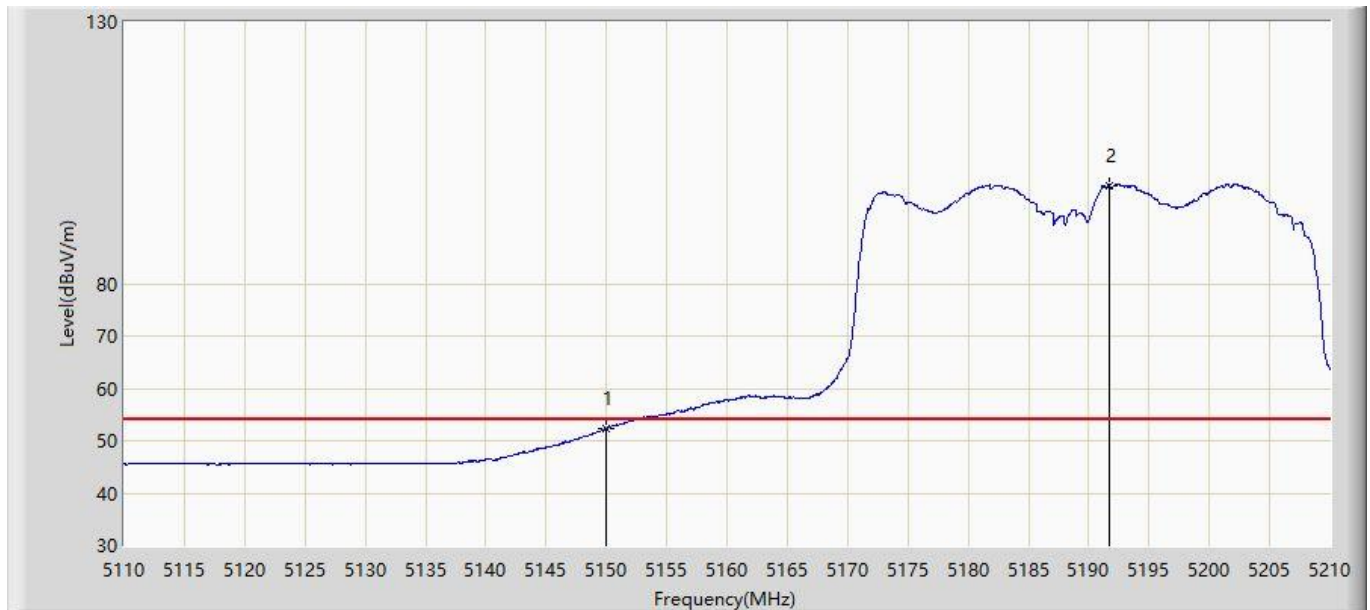


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.383	48.737	-1.617	54.000	3.646	AV
2		*	5191.700	98.830	95.157	N/A	N/A	3.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361D (CDD Mode)	

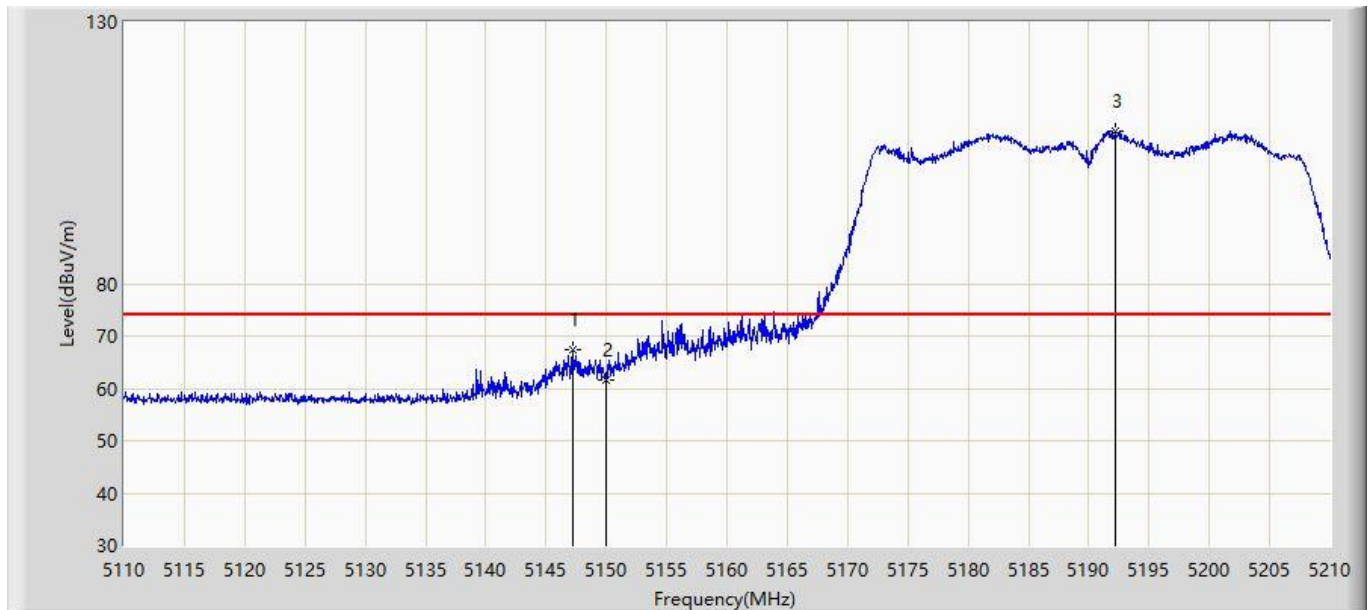


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.200	67.497	63.853	-6.503	74.000	3.645	PK
2			5150.000	61.621	57.975	-12.379	74.000	3.646	PK
3		*	5192.200	109.142	105.469	N/A	N/A	3.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 10:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361D (CDD Mode)	

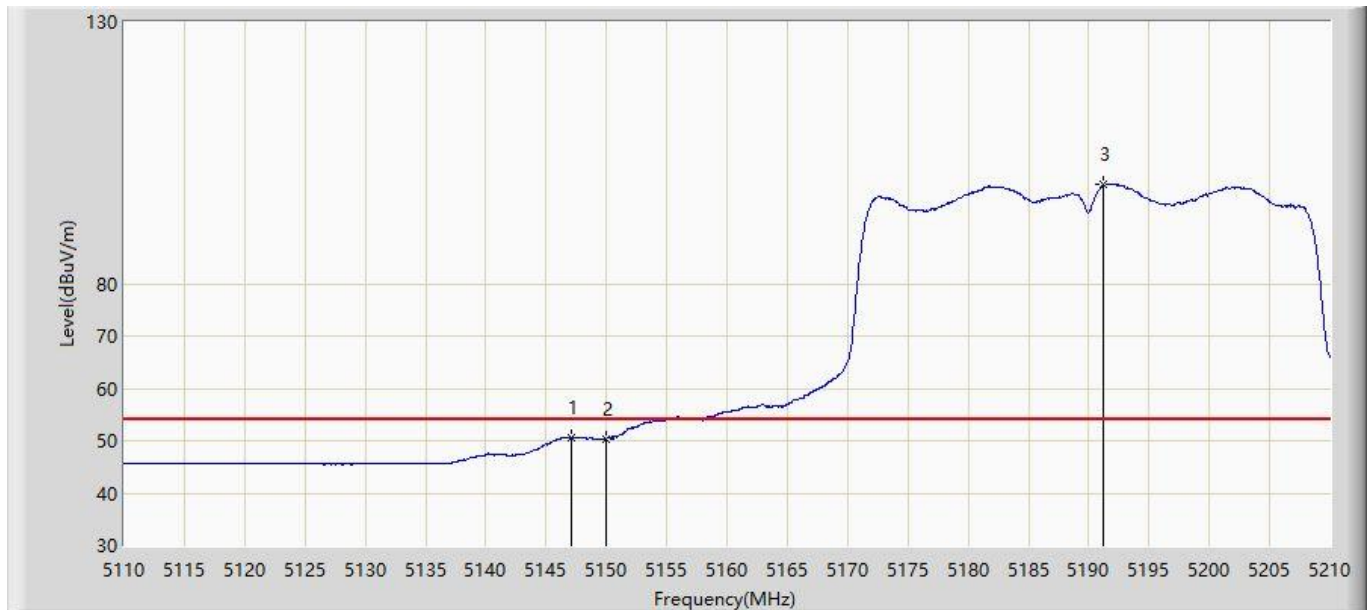


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.150	50.658	47.014	-3.342	54.000	3.645	AV
2			5150.000	50.403	46.757	-3.597	54.000	3.646	AV
3		*	5191.250	98.892	95.220	N/A	N/A	3.672	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 11:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361D (CDD Mode)	

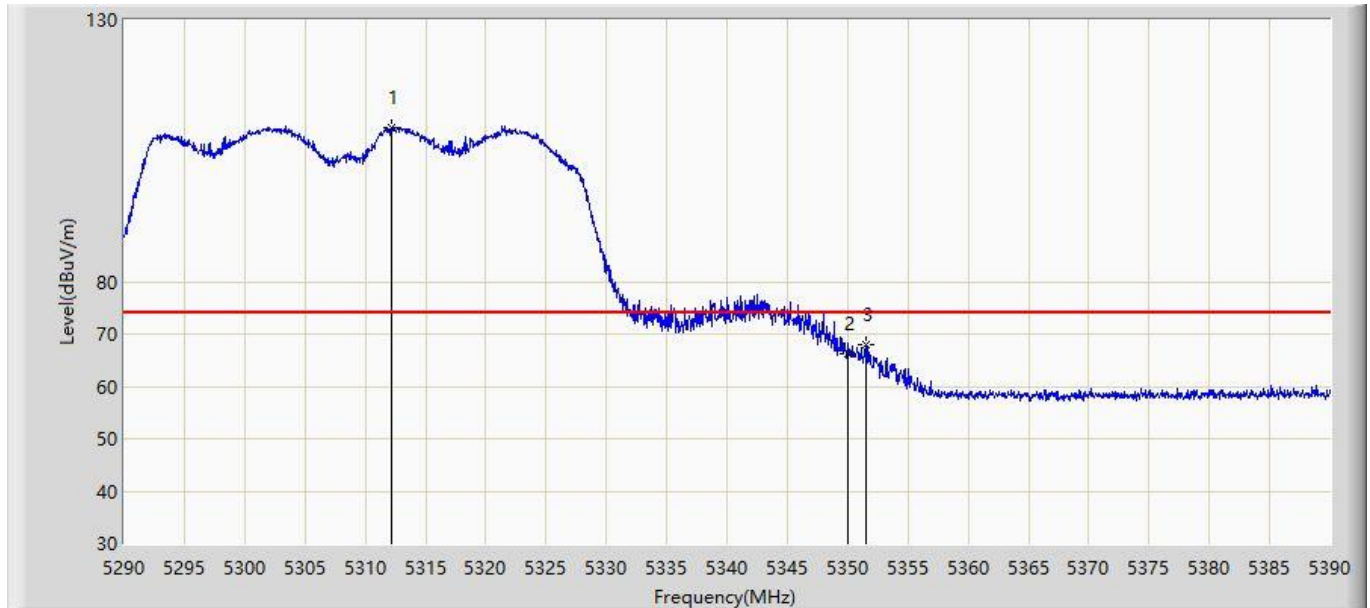


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.200	109.472	105.722	N/A	N/A	3.750	PK
2			5350.000	66.364	62.590	-7.636	74.000	3.774	PK
3			5351.550	68.046	64.271	-5.954	74.000	3.775	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 11:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361D (CDD Mode)	

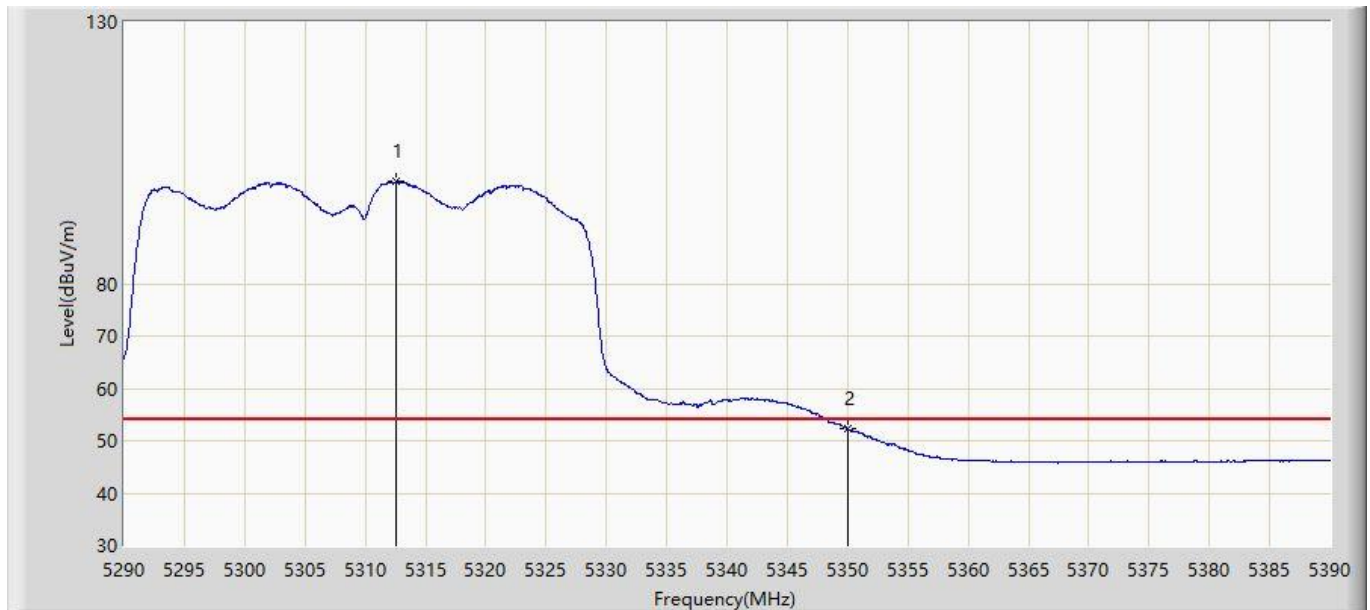


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.600	99.422	95.672	N/A	N/A	3.750	AV
2			5350.000	52.235	48.461	-1.765	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 11:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361D (CDD Mode)	

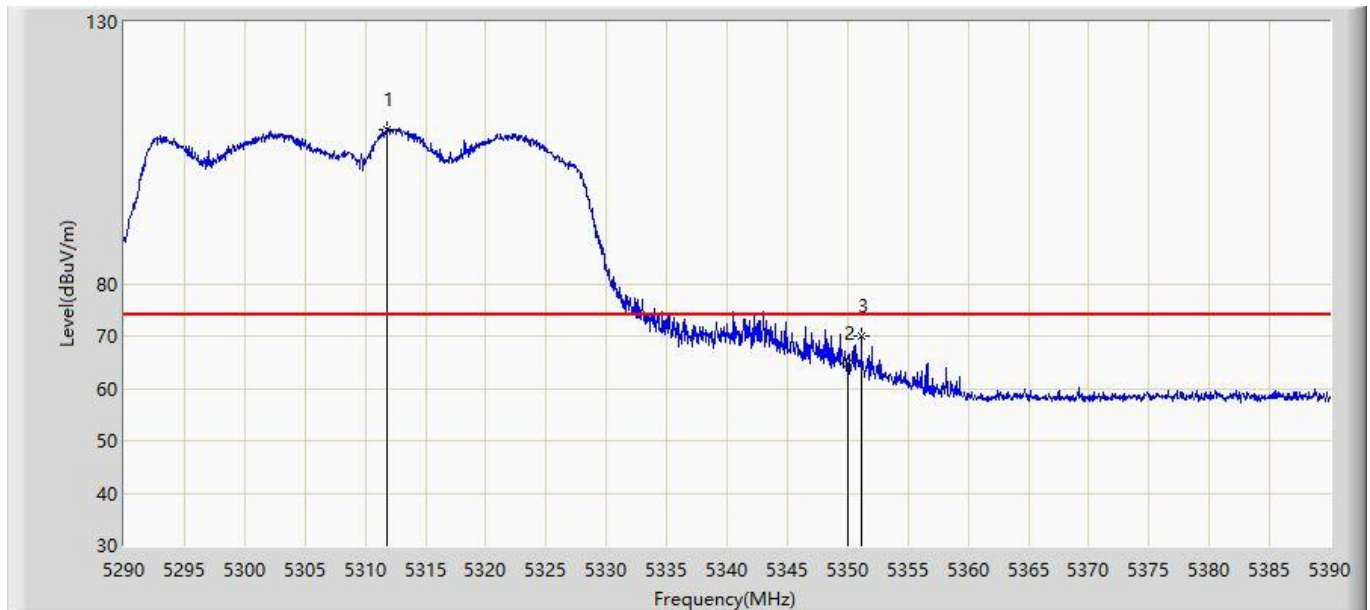


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.750	109.358	105.608	N/A	N/A	3.750	PK
2			5350.000	64.814	61.040	-9.186	74.000	3.774	PK
3			5351.150	69.881	66.107	-4.119	74.000	3.774	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 11:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361D (CDD Mode)	

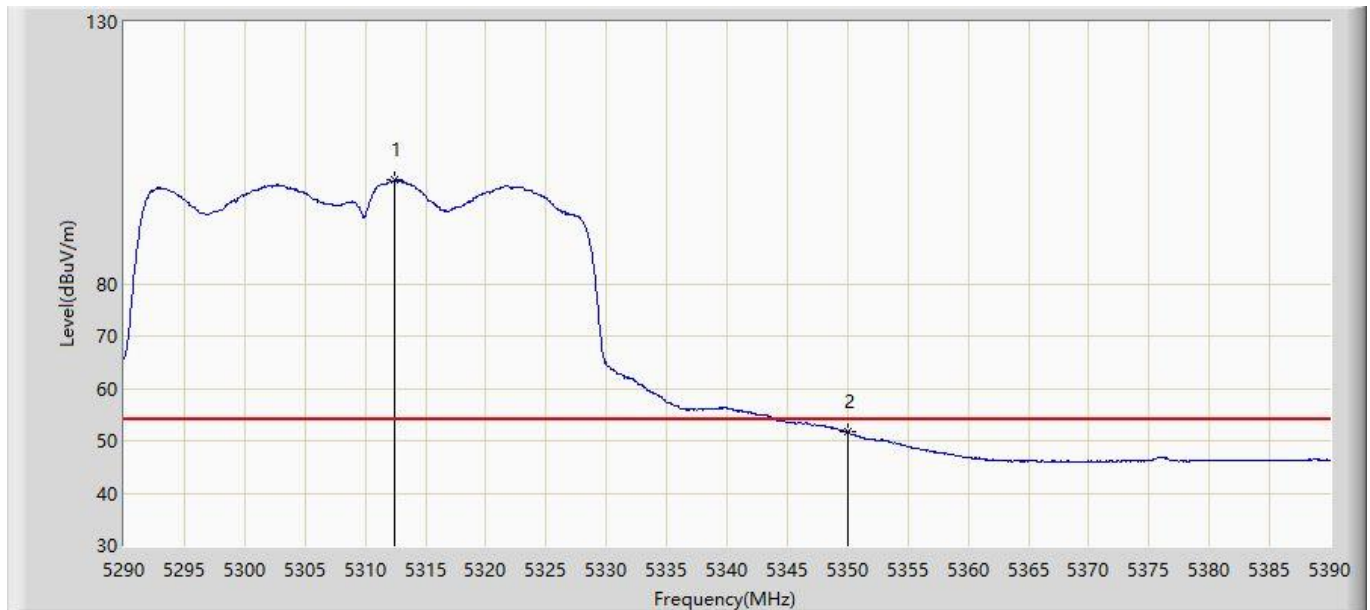


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.450	99.747	95.997	N/A	N/A	3.750	AV
2			5350.000	51.700	47.926	-2.300	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 11:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1361D (CDD Mode)	

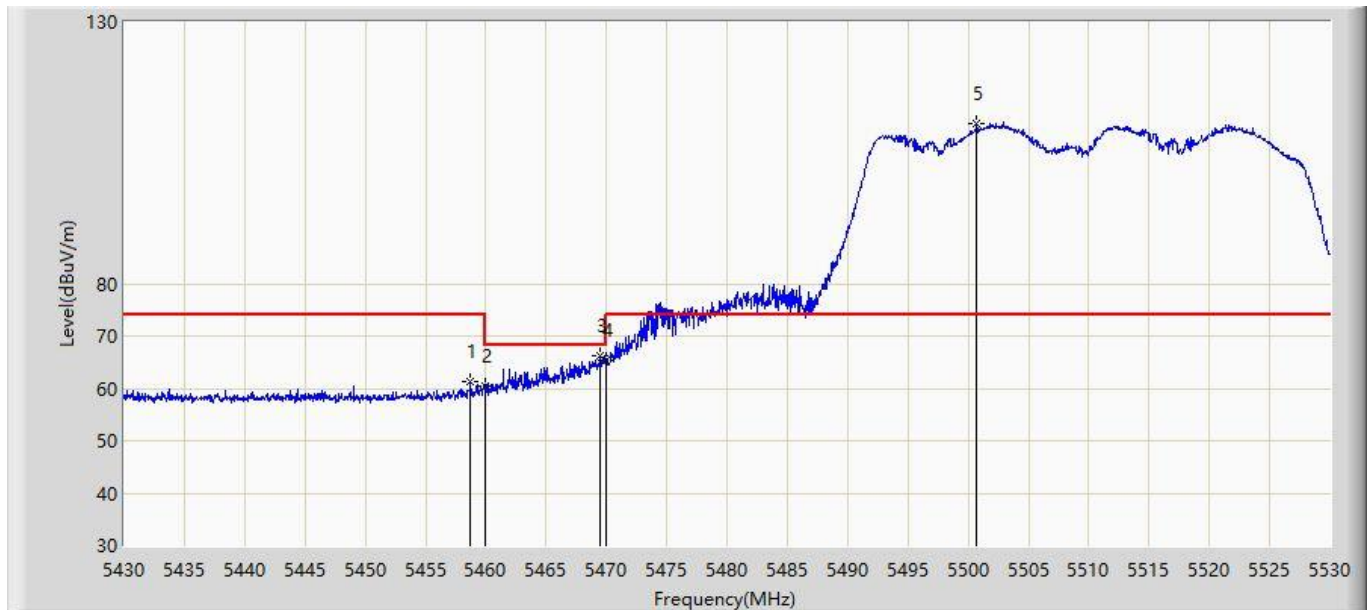


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.750	61.274	72.873	-12.726	74.000	-11.598	PK
2			5460.000	60.432	72.022	-13.568	74.000	-11.590	PK
3			5469.500	66.325	77.854	-1.875	68.200	-11.530	PK
4			5470.000	65.293	76.819	-2.907	68.200	-11.526	PK
5		*	5500.700	110.617	122.077	N/A	N/A	-11.460	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/26 - 11:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1361D (CDD Mode)	

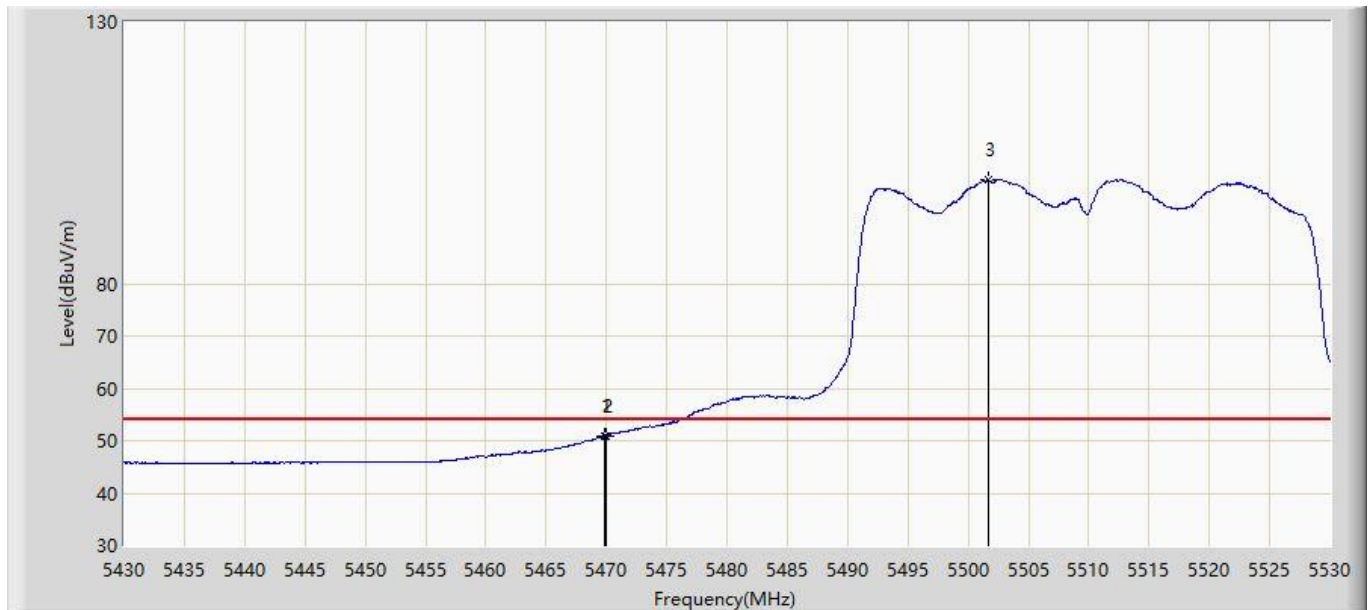

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5469.850	50.915	62.442	-3.085	54.000	-11.527	AV
2			5470.000	50.865	62.391	-3.135	54.000	-11.526	AV
3		*	5501.650	99.767	111.233	N/A	N/A	-11.466	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).