


測試頻道: IEEE 802.11ac (VHT40) / 5270 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Horizontal

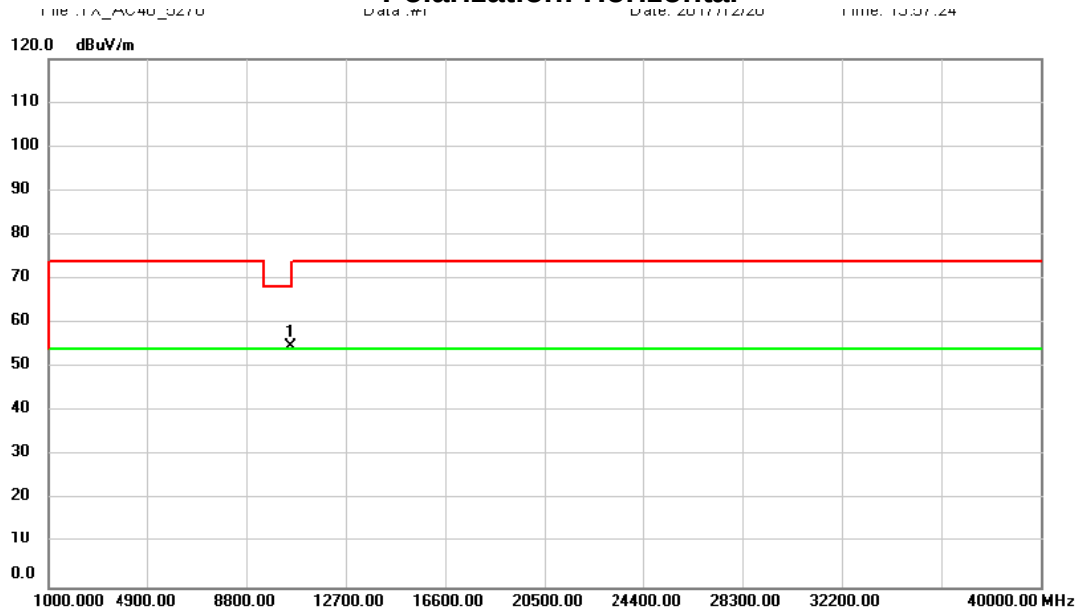

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	52.72	2.04	54.76	68.20	-13.44	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5310 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%

Polarization: Vertical

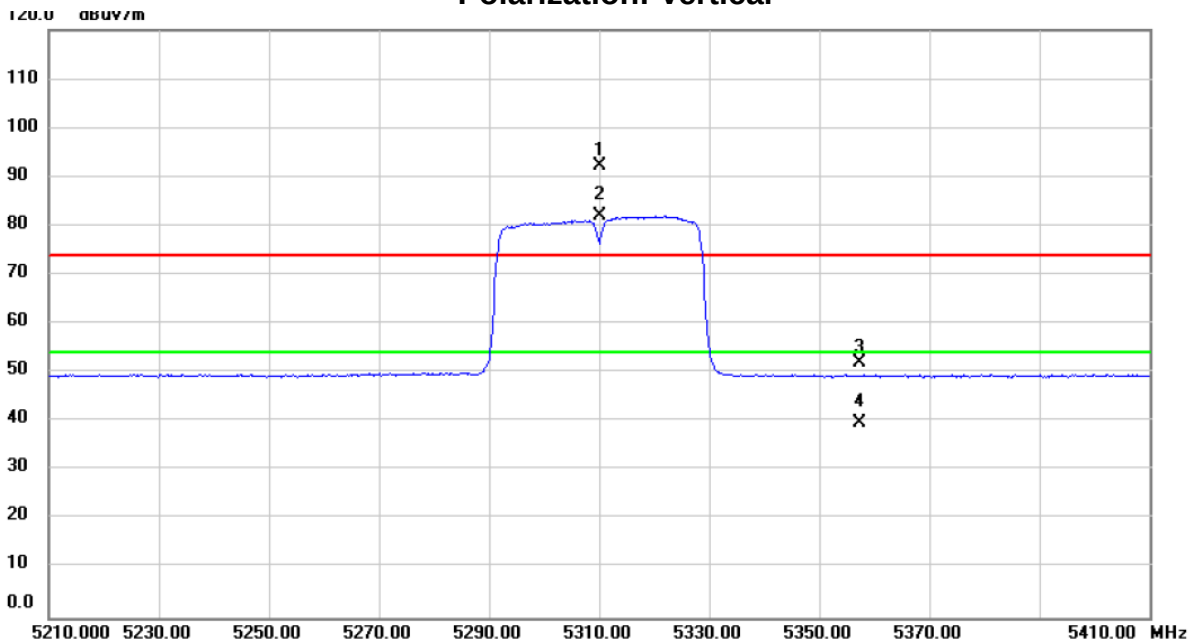


Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5310.000	54.63	37.72	92.35	74.00	18.35	peak	No Limit
2	*	5310.000	44.20	37.72	81.92	54.00	27.92	AVG	No Limit
3		5357.380	14.27	37.76	52.03	74.00	-21.97	peak	
4		5357.380	2.12	37.76	39.88	54.00	-14.12	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5310 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Vertical

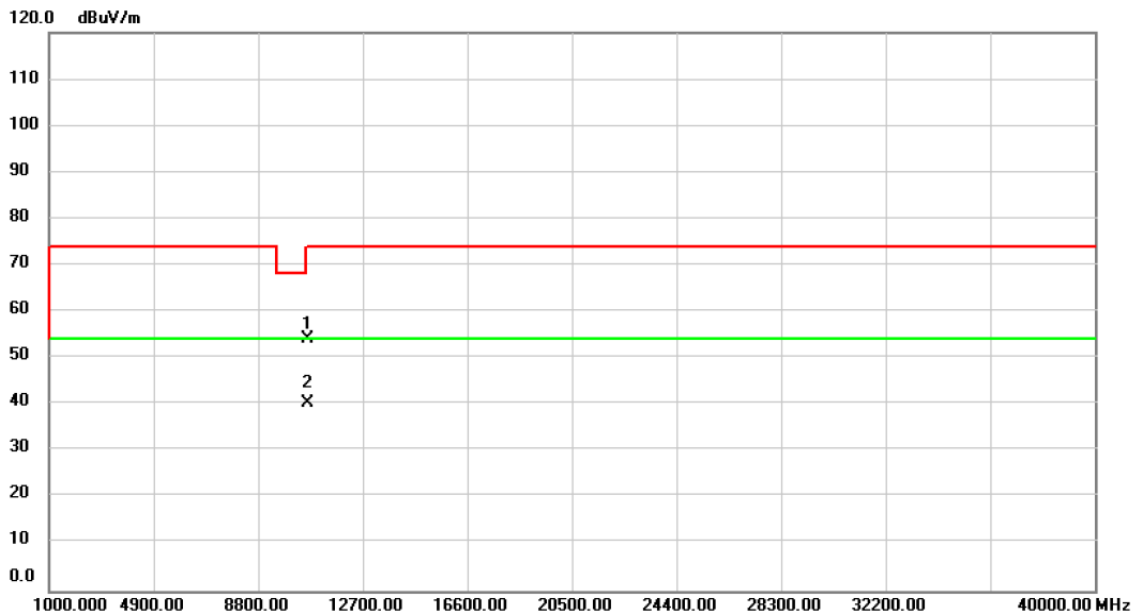

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	51.92	2.18	54.10	74.00	-19.90	peak	
2	*	10620.00	38.11	2.18	40.29	54.00	-13.71	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5310 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Horizontal

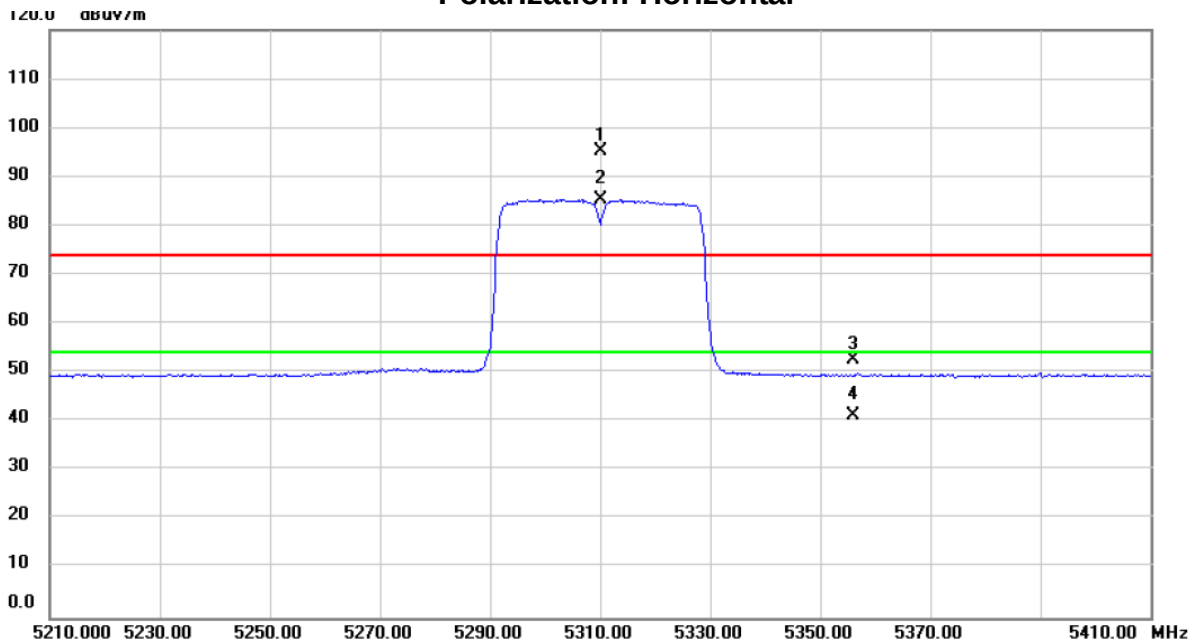

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5310.000	57.46	37.72	95.18	74.00	21.18	peak	No Limit
2	*	5310.000	47.56	37.72	85.28	54.00	31.28	AVG	No Limit
3		5355.940	14.92	37.76	52.68	74.00	-21.32	peak	
4		5355.940	3.36	37.76	41.12	54.00	-12.88	AVG	


測試頻道: IEEE 802.11ac (VHT40) / 5310
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

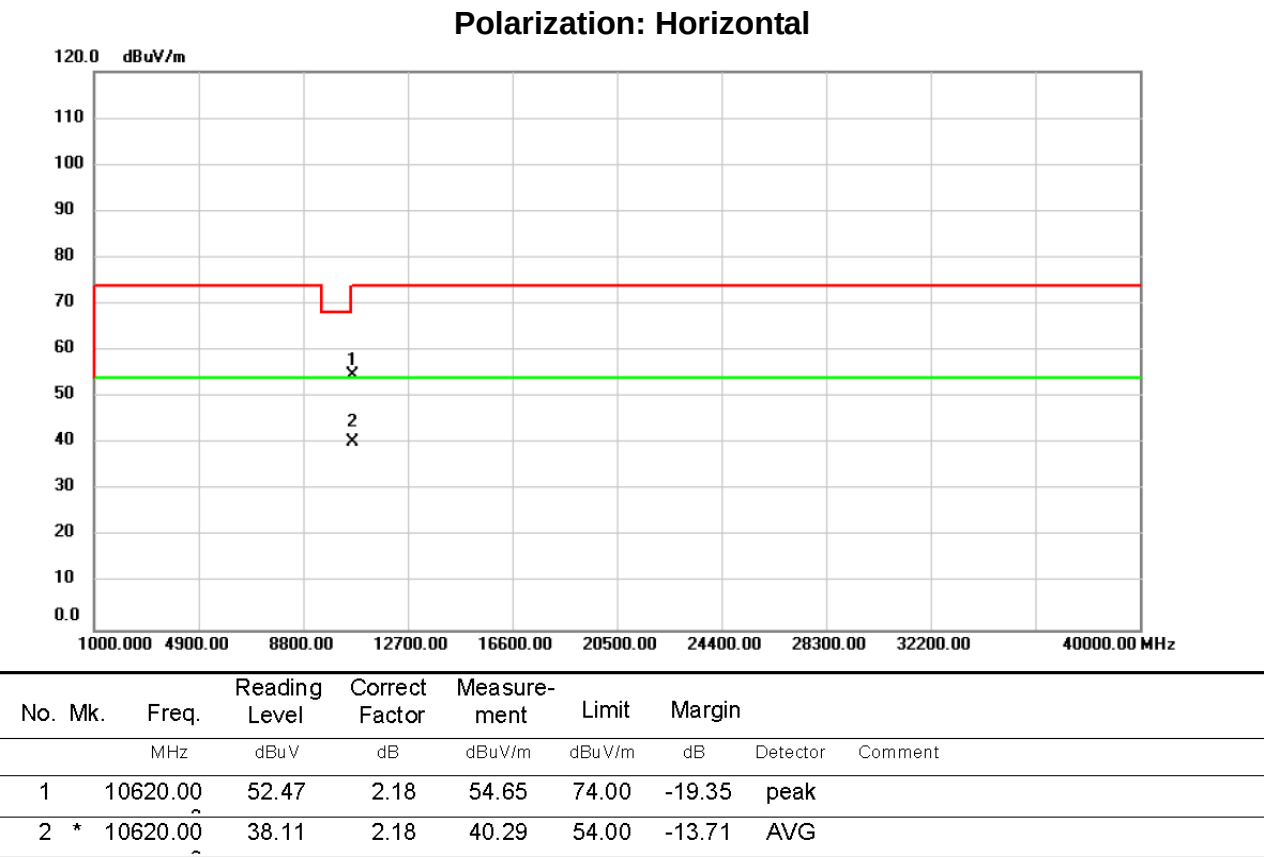

測試頻道: IEEE 802.11ac (VHT80) / 5290 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

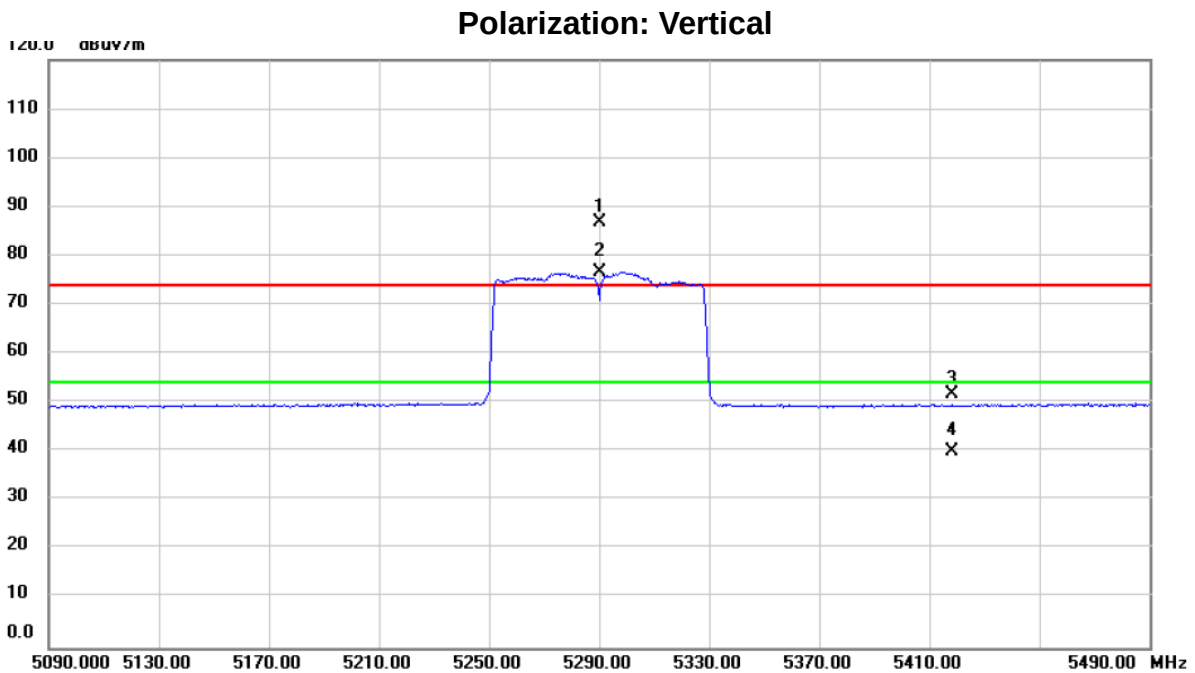

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5290.000	49.09	37.69	86.78	74.00	12.78	peak	No Limit
2	*	5290.000	39.02	37.69	76.71	54.00	22.71	AVG	No Limit
3		5418.460	14.03	37.83	51.86	74.00	-22.14	peak	
4		5418.460	2.11	37.83	39.94	54.00	-14.06	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5290 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

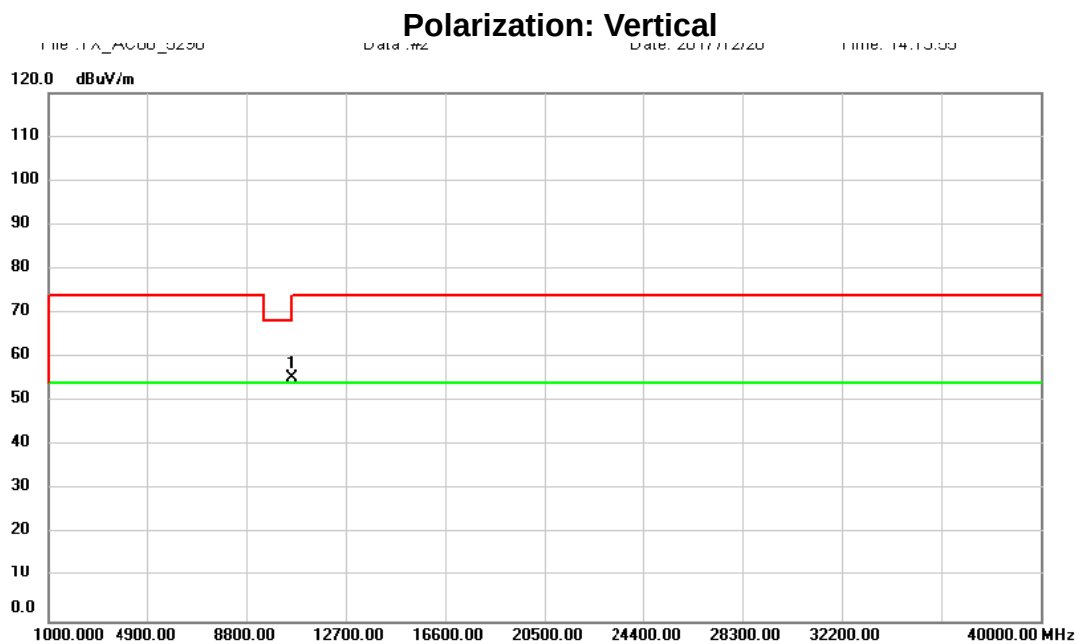

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	53.12	2.11	55.23	68.20	-12.97	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5290 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%

Polarization: Horizontal

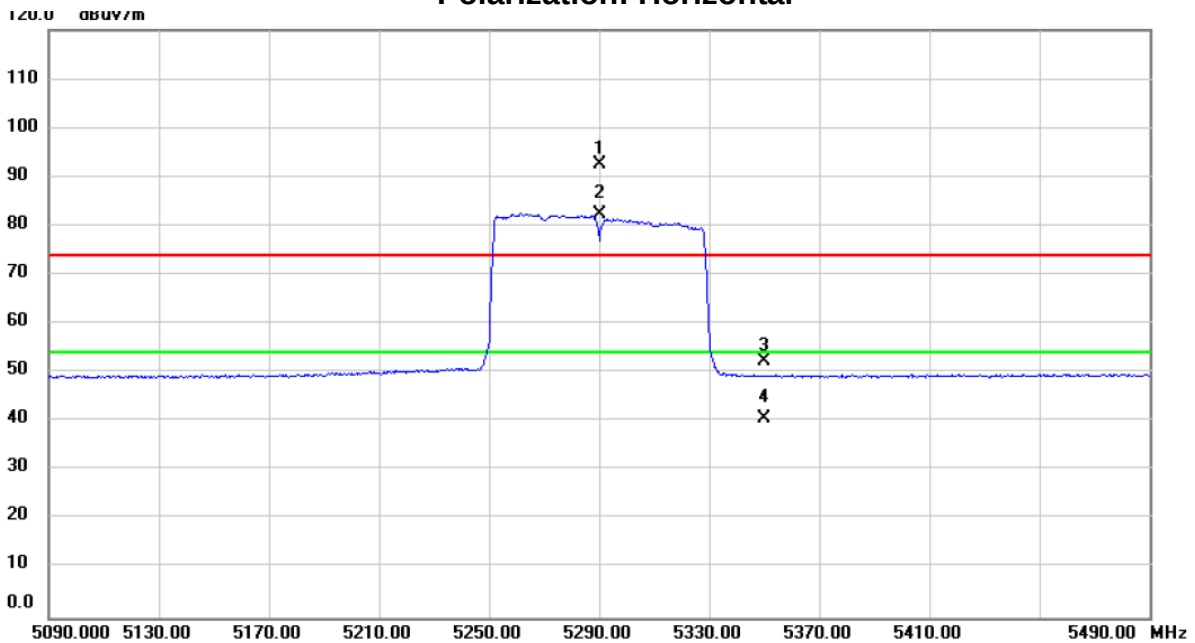


Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 X	5290.000	54.99	37.69	92.68	74.00	18.68	peak	No Limit
2 *	5290.000	44.64	37.69	82.33	54.00	28.33	AVG	No Limit
3	5350.000	14.44	37.76	52.20	74.00	-21.80	peak	
4	5350.000	2.77	37.76	40.53	54.00	-13.47	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5290 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Horizontal

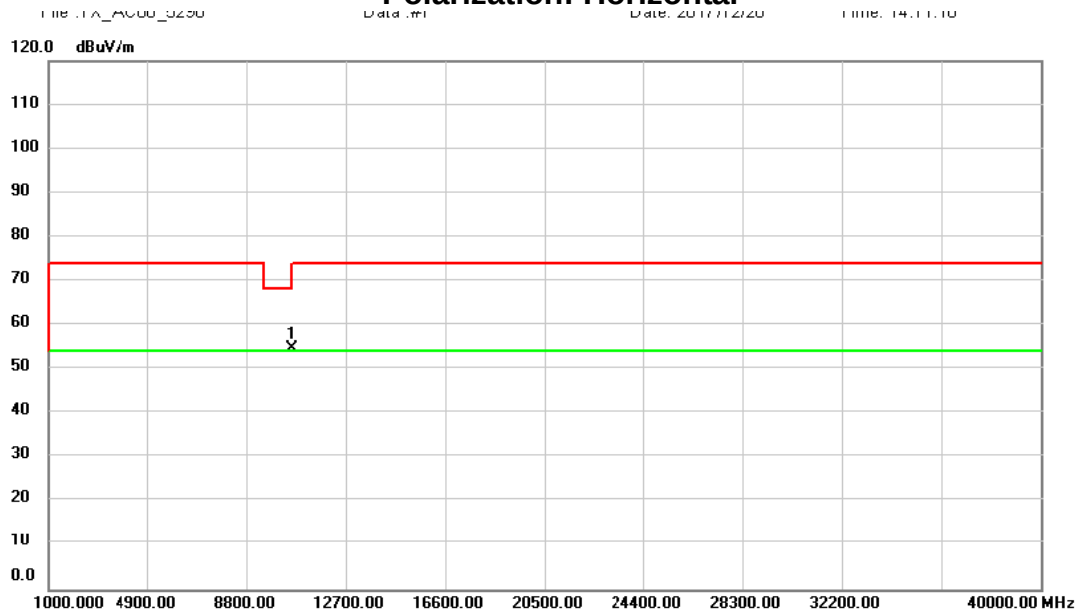

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	52.53	2.11	54.64	68.20	-13.56	peak	

測試頻道: IEEE 802.11a / 5500 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

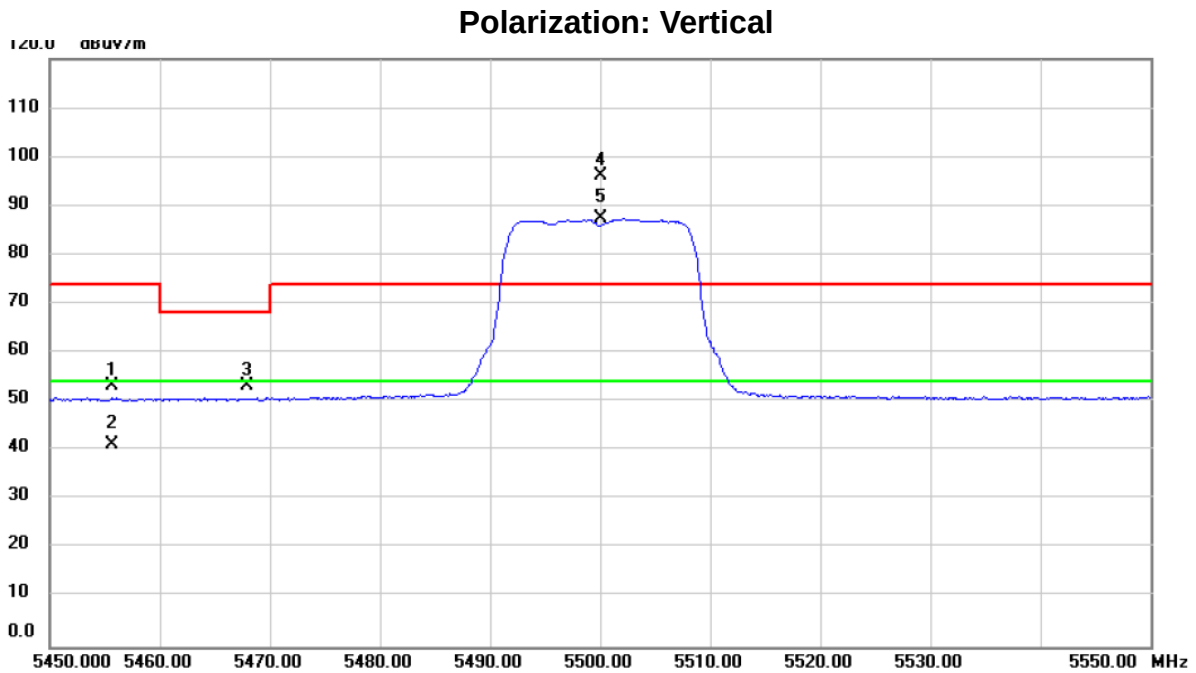

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5455.700	15.30	37.87	53.17	74.00	-20.83	peak	
2	5455.700	3.36	37.87	41.23	54.00	-12.77	AVG	
3	5467.920	15.51	37.88	53.39	68.20	-14.81	peak	
4 X	5500.000	58.34	37.92	96.26	74.00	22.26	peak	No Limit
5 *	5500.000	49.57	37.92	87.49	54.00	33.49	AVG	No Limit

測試頻道: IEEE 802.11a / 5500 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Vertical

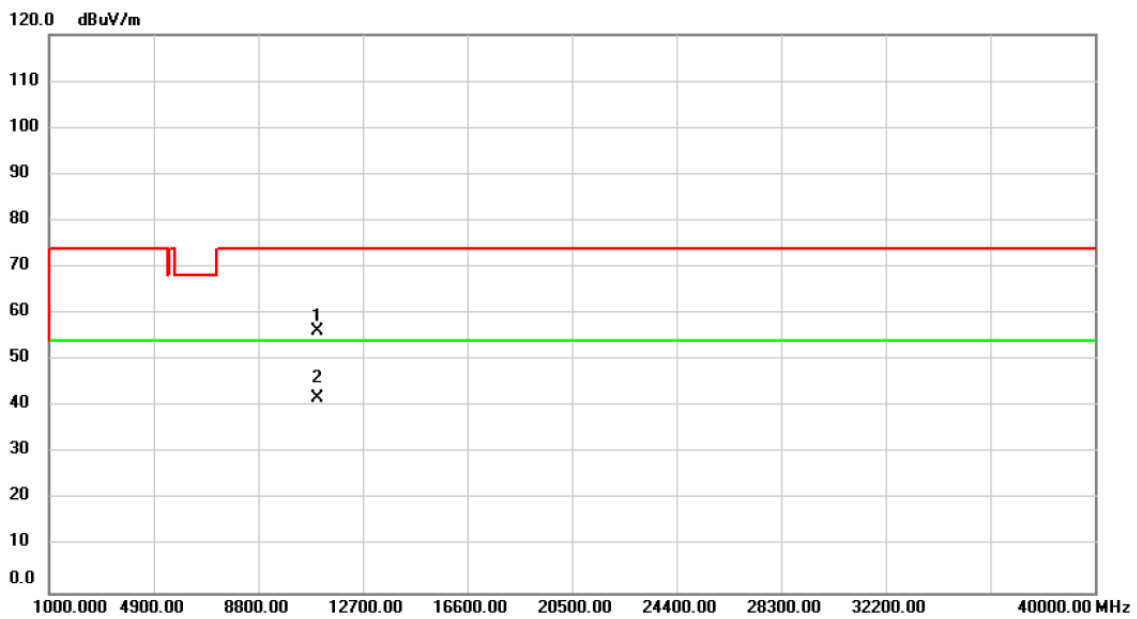


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	53.26	2.85	56.11	74.00	-17.89	peak	
2	*	11000.00	39.14	2.85	41.99	54.00	-12.01	AVG	

測試頻道: IEEE 802.11a / 5500 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

Polarization: Horizontal

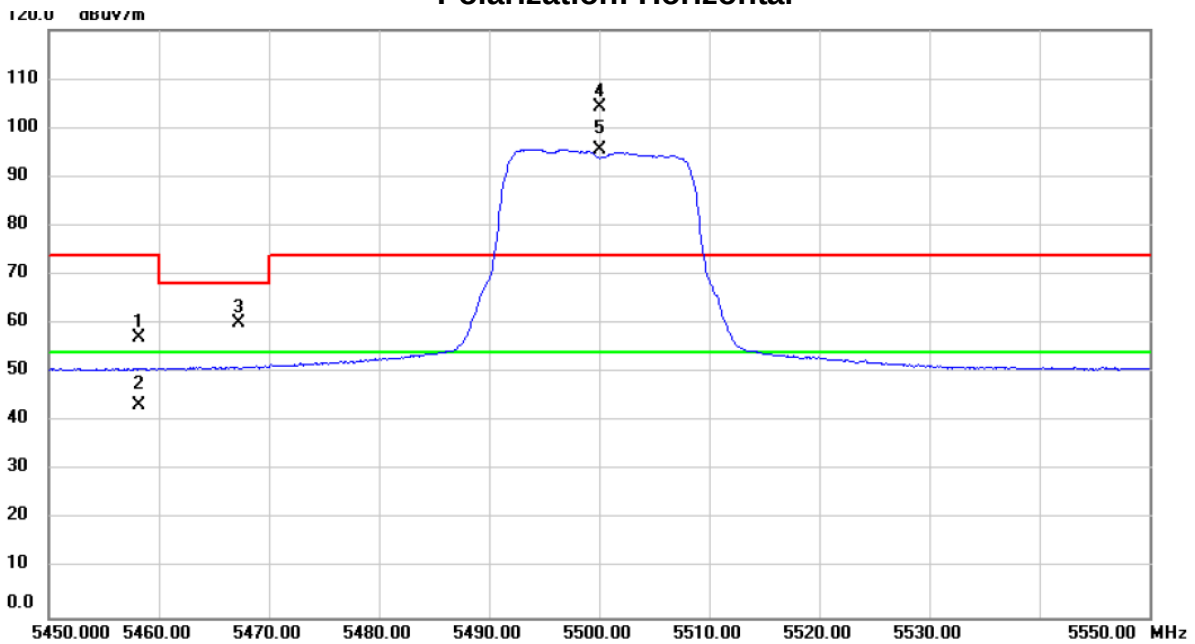


Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5458.150	19.17	37.87	57.04	74.00	-16.96	peak	
2	5458.150	5.38	37.87	43.25	54.00	-10.75	AVG	
3	5467.220	22.17	37.88	60.05	68.20	-8.15	peak	
4 X	5500.000	66.23	37.92	104.15	74.00	30.15	peak	No Limit
5 *	5500.000	57.75	37.92	95.67	54.00	41.67	AVG	No Limit

測試頻道: IEEE 802.11a / 5500 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

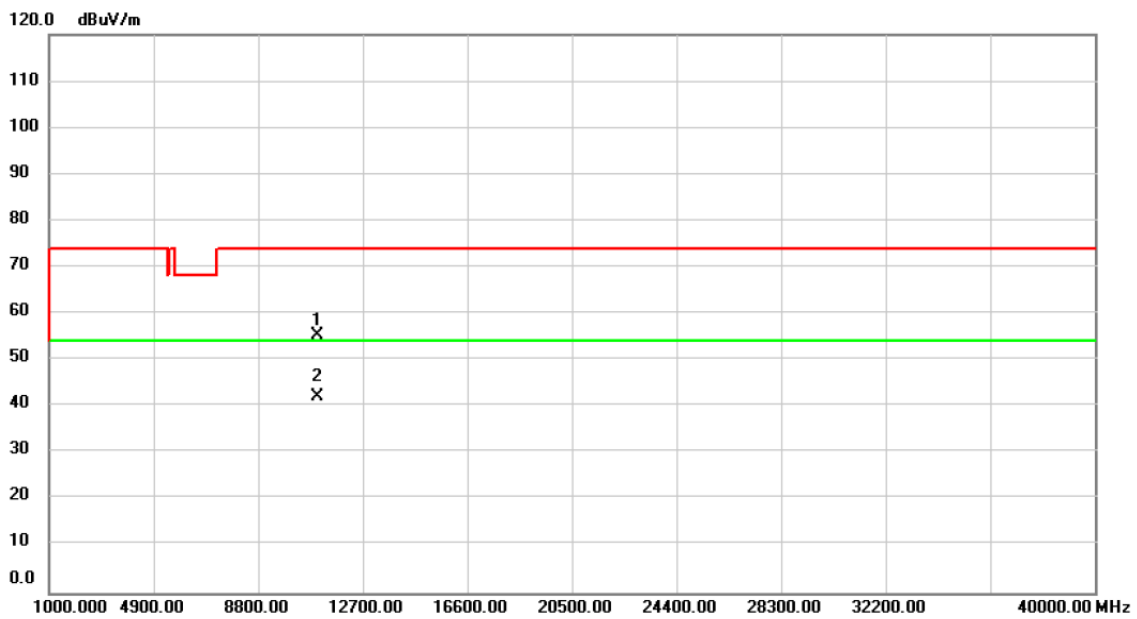

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	52.54	2.85	55.39	74.00	-18.61	peak	
2	*	11000.00	39.16	2.85	42.01	54.00	-11.99	AVG	

測試頻道: IEEE 802.11a / 5580 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

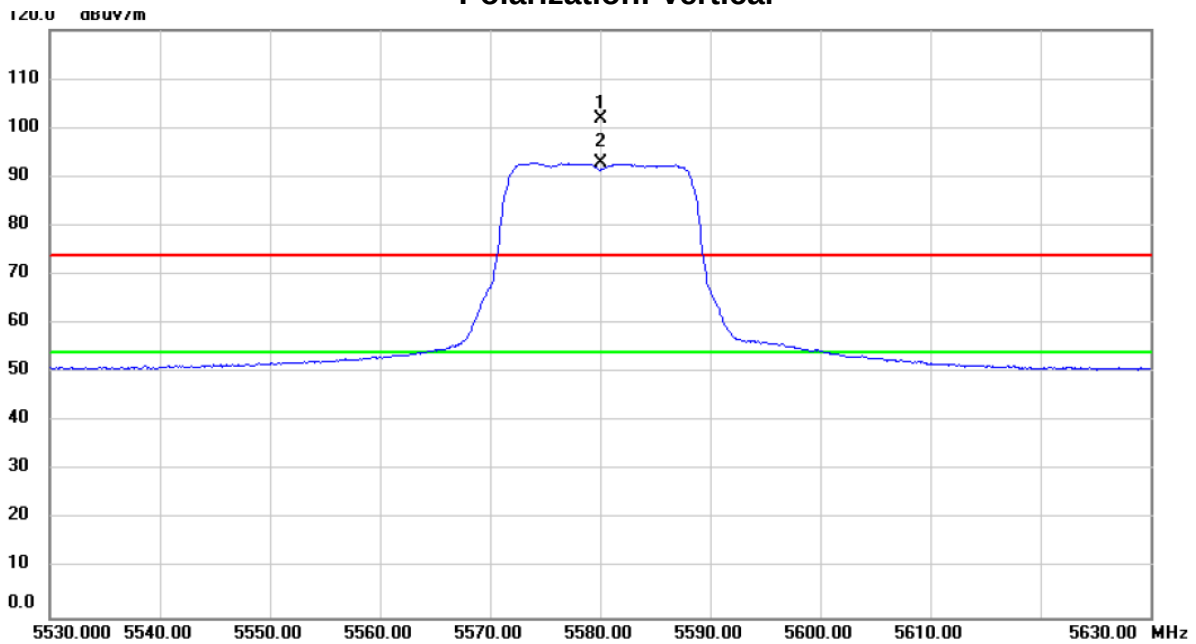

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5580.000	63.71	38.14	101.85	74.00	27.85	peak	No Limit
2	*	5580.000	54.67	38.14	92.81	54.00	38.81	AVG	No Limit

測試頻道: IEEE 802.11a / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

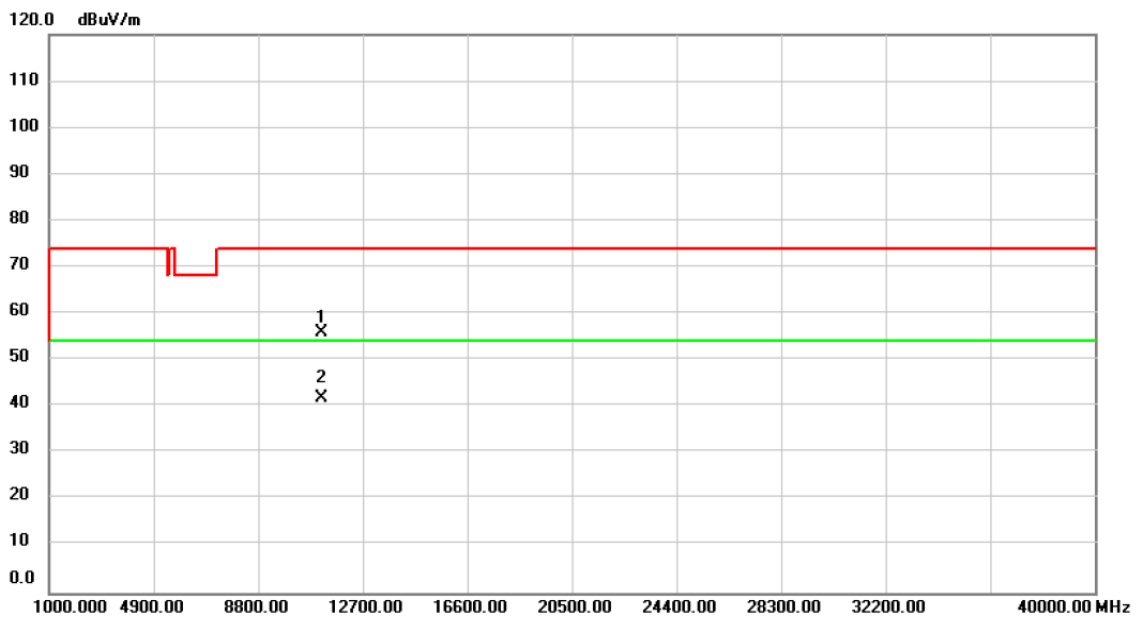Polarization: Vertical

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	52.87	3.04	55.91	74.00	-18.09	peak	
2	*	11160.00	38.76	3.04	41.80	54.00	-12.20	AVG	

測試頻道: IEEE 802.11a / 5580 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Horizontal

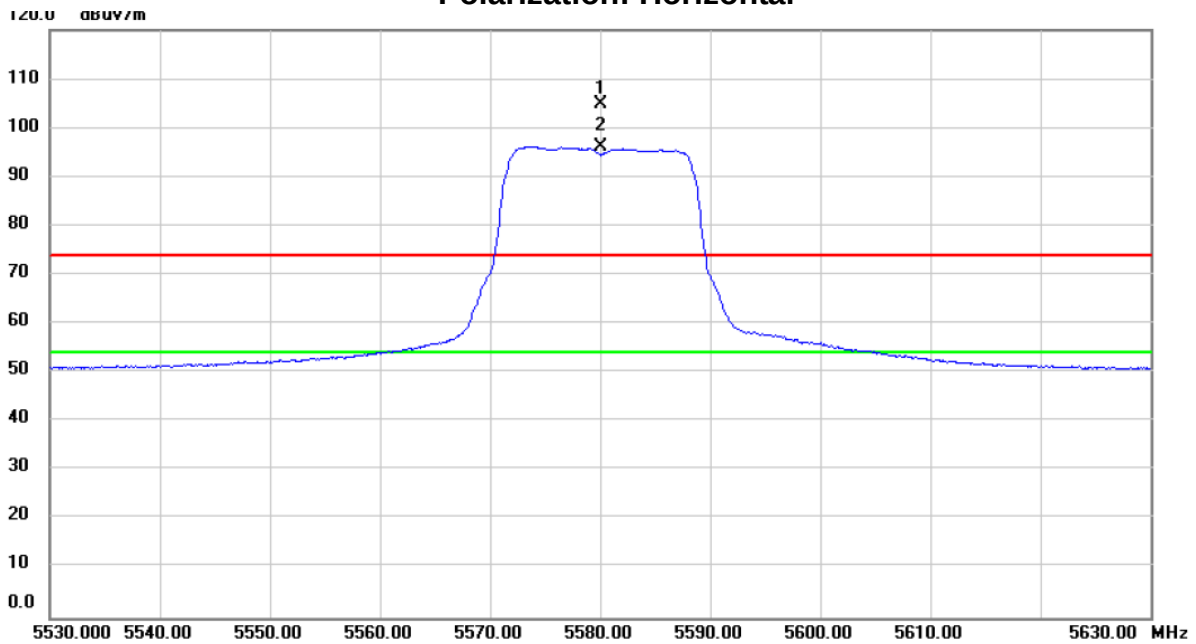


Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5580.000	66.84	38.14	104.98	74.00	30.98	peak	No Limit
2	*	5580.000	58.02	38.14	96.16	54.00	42.16	AVG	No Limit

測試頻道: IEEE 802.11a / 5580 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Horizontal

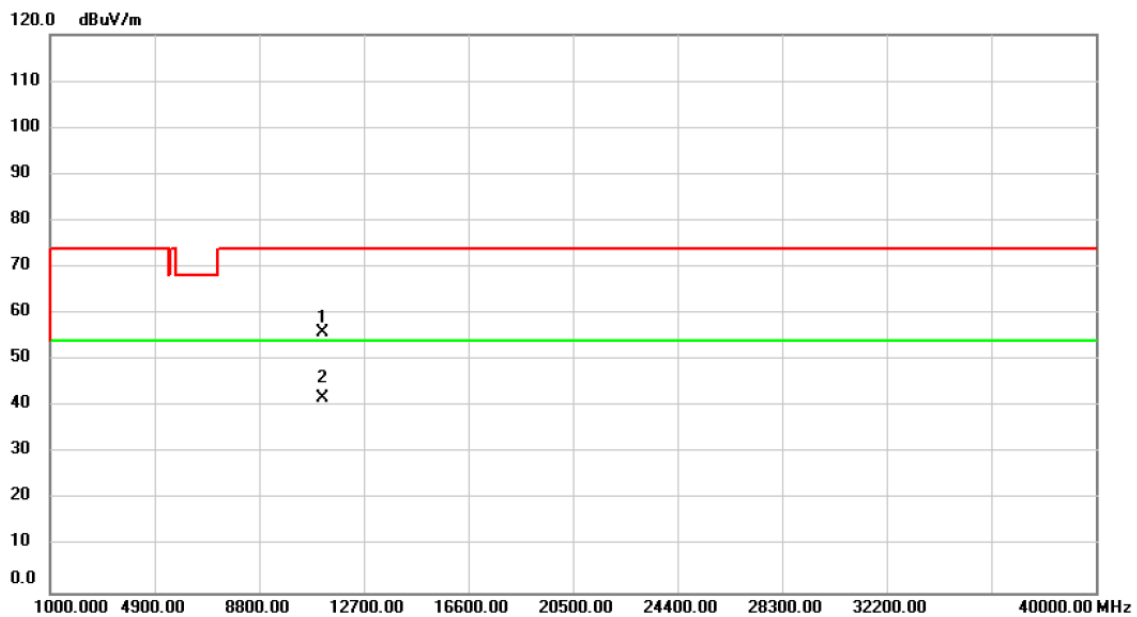

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.00	52.98	3.04	56.02	74.00	-17.98	peak	
2	*	11160.00	38.76	3.04	41.80	54.00	-12.20	AVG	

測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

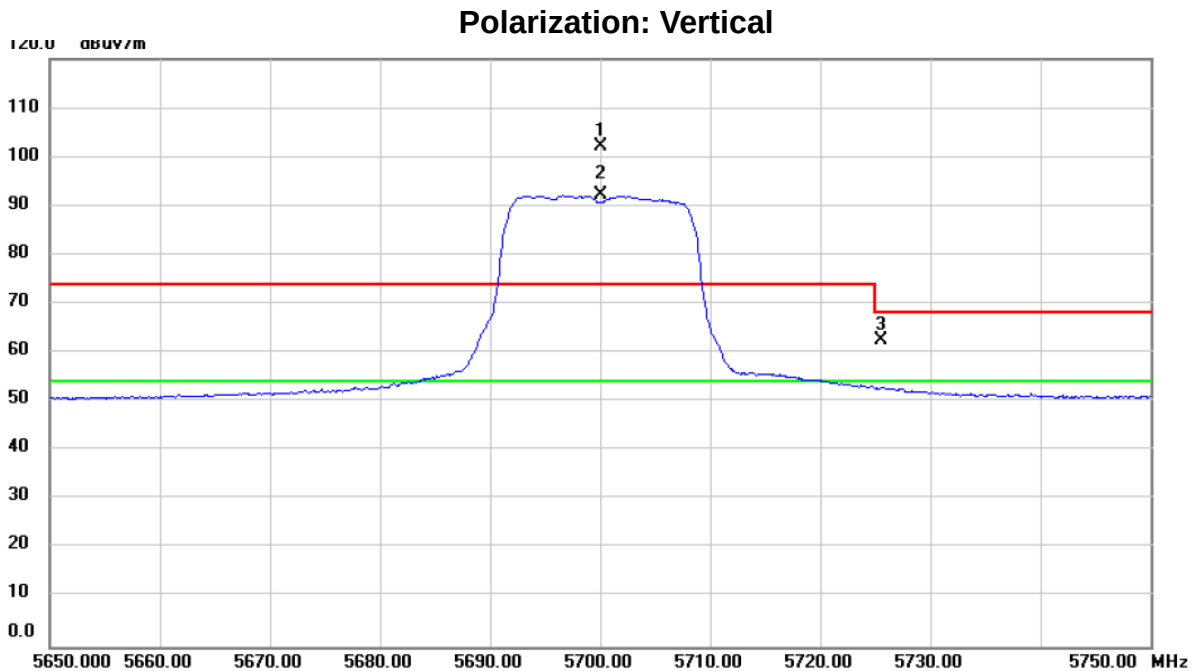

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5700.000	63.58	38.46	102.04	74.00	28.04	peak	No Limit
2	*	5700.000	53.66	38.46	92.12	54.00	38.12	AVG	No Limit
3		5725.525	24.15	38.53	62.68	68.20	-5.52	peak	

測試頻道: IEEE 802.11a / 5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%

Polarization: Vertical

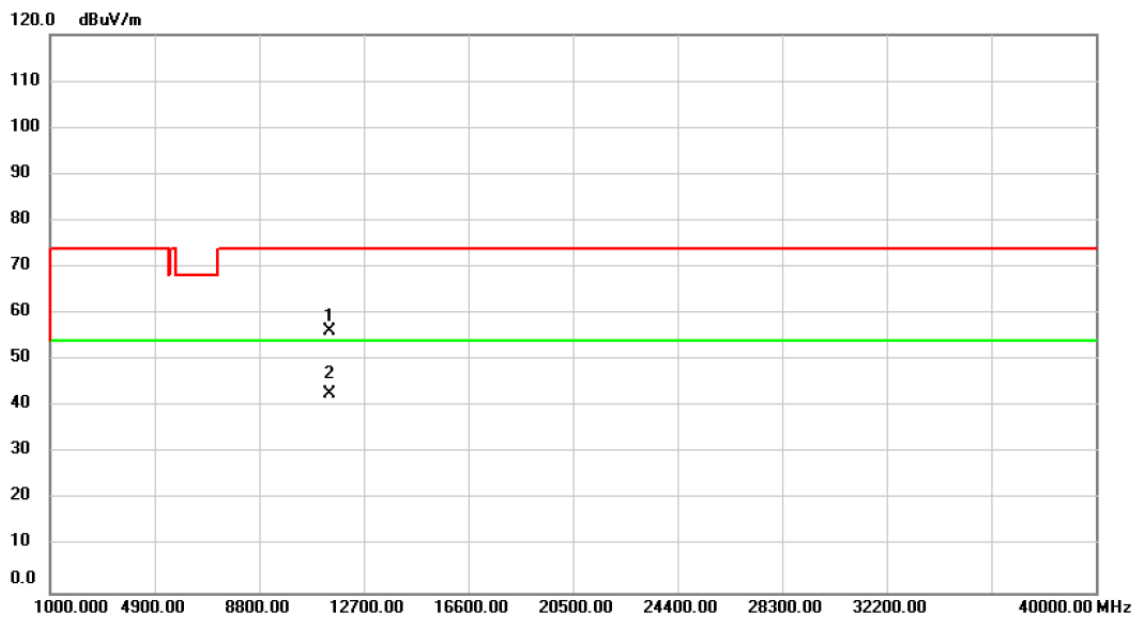


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	53.04	3.30	56.34	74.00	-17.66	peak	
2	*	11400.00	39.34	3.30	42.64	54.00	-11.36	AVG	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

Polarization: Horizontal

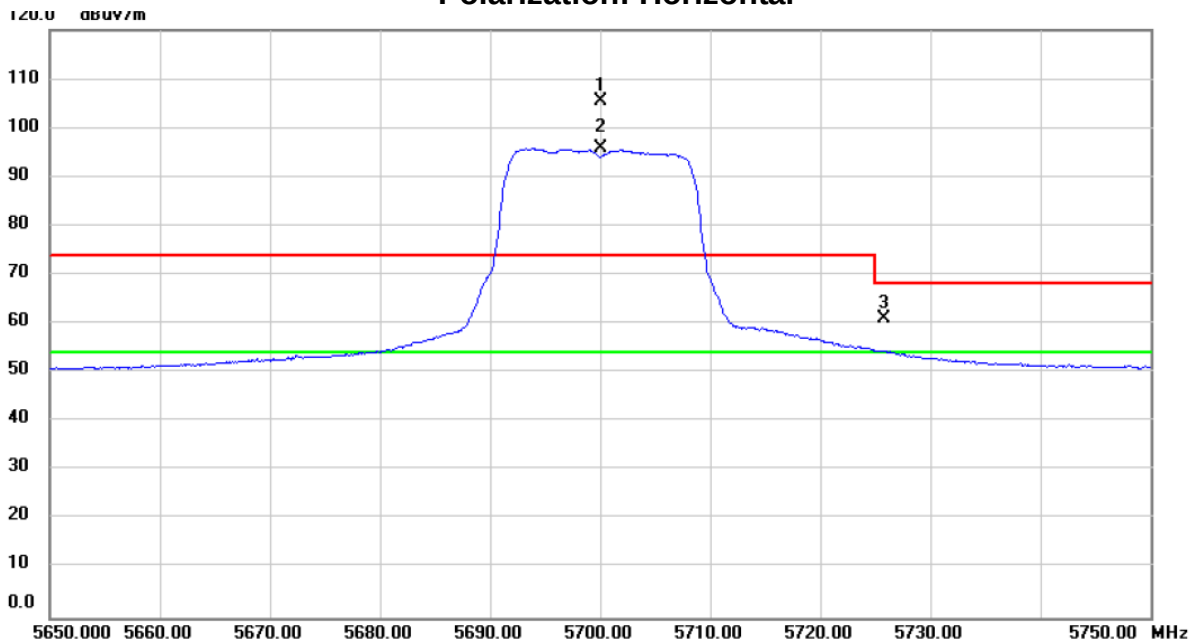


Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5700.000	66.97	38.46	105.43	74.00	31.43	peak	No Limit
2	*	5700.000	57.30	38.46	95.76	54.00	41.76	AVG	No Limit
3		5725.850	22.41	38.53	60.94	68.20	-7.26	peak	

測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

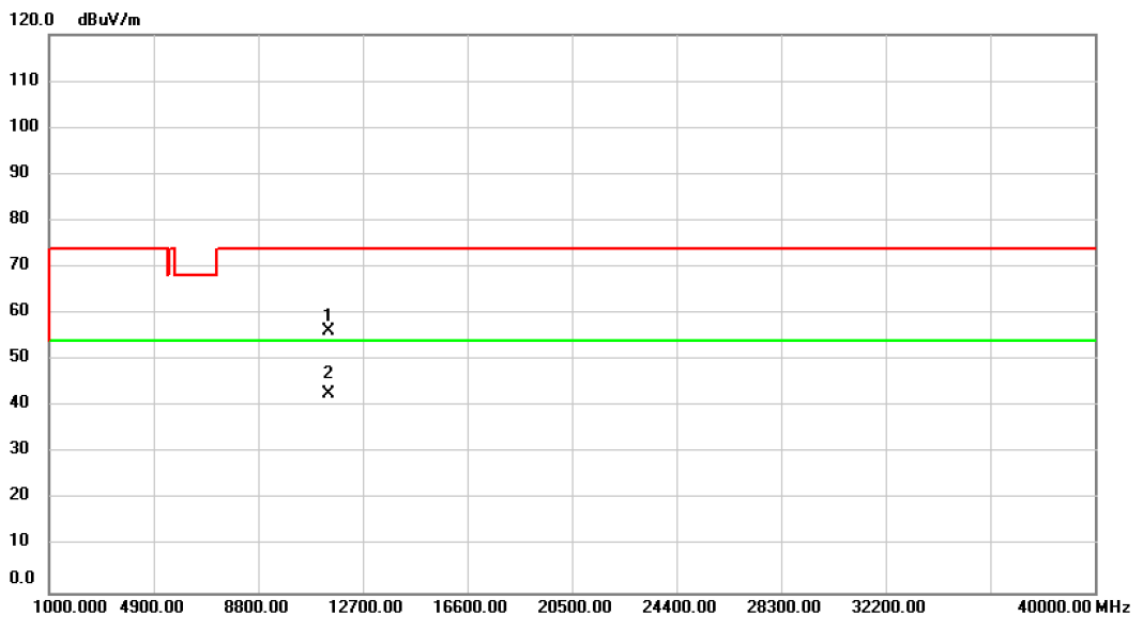

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	53.06	3.30	56.36	74.00	-17.64	peak	
2	*	11400.00	39.33	3.30	42.63	54.00	-11.37	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5500 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

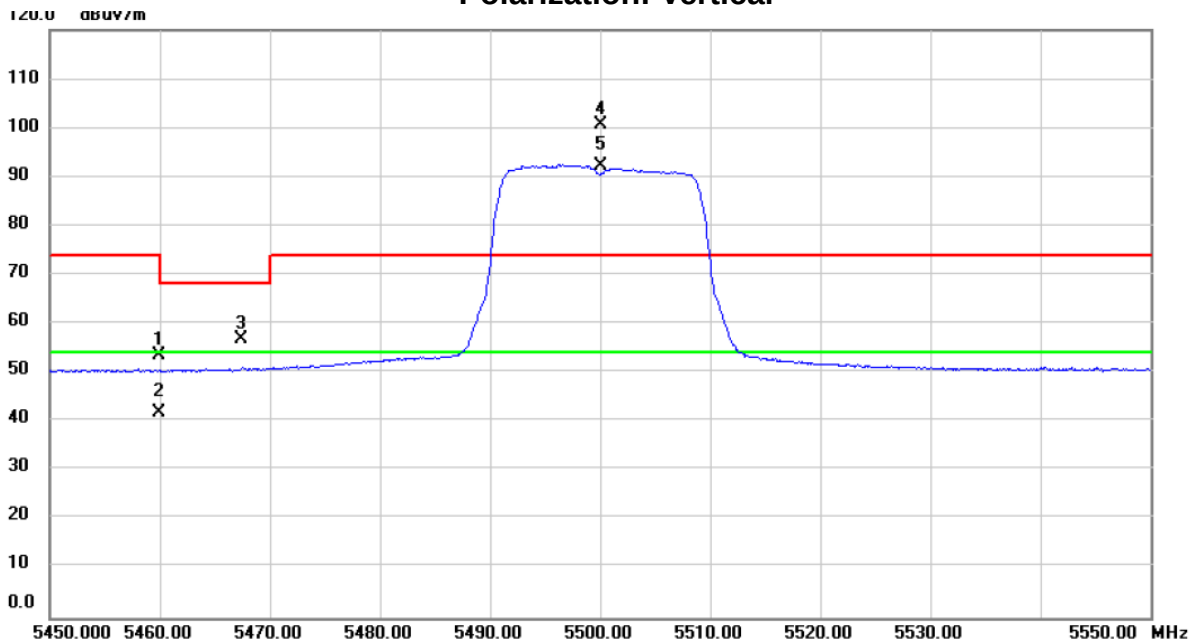

Io. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.900	15.78	37.88	53.66	74.00	-20.34	peak	
2	5459.900	4.08	37.88	41.96	54.00	-12.04	AVG	
3	5467.450	18.98	37.88	56.86	68.20	-11.34	peak	
4 X	5500.000	62.82	37.92	100.74	74.00	26.74	peak	No Limit
5 *	5500.000	54.37	37.92	92.29	54.00	38.29	AVG	No Limit


測試頻道: IEEE 802.11ac (VHT20) / 5500
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

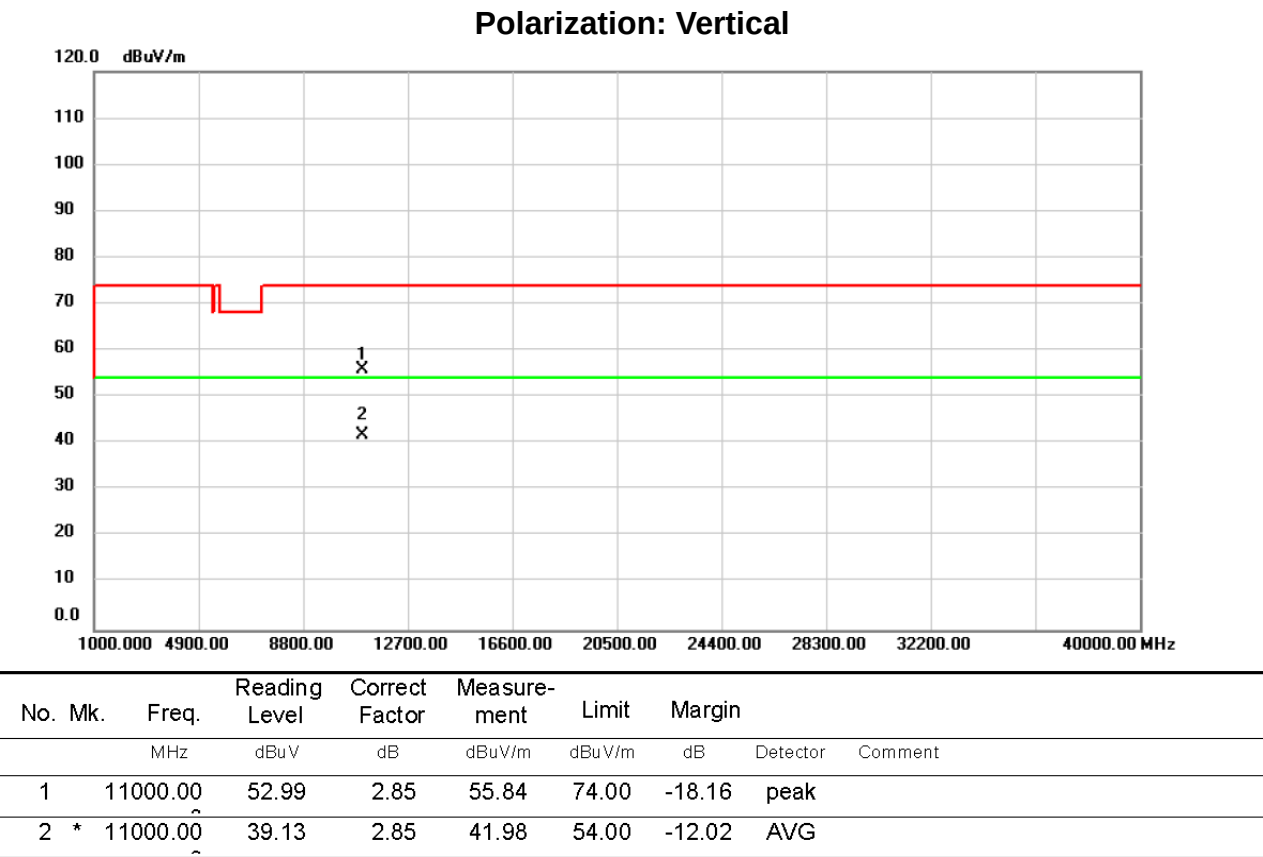

測試頻道: IEEE 802.11ac (VHT20) / 5500 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢測器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Horizontal

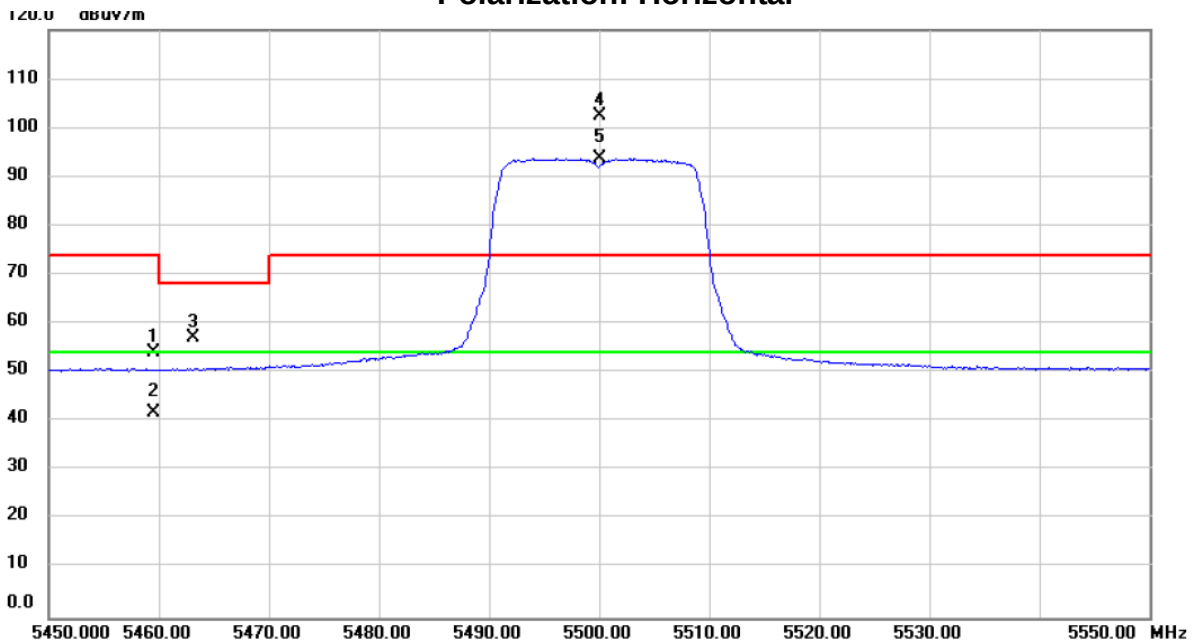

Io. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.480	16.22	37.88	54.10	74.00	-19.90	peak	
2	5459.480	4.12	37.88	42.00	54.00	-12.00	AVG	
3	5463.110	19.38	37.88	57.26	68.20	-10.94	peak	
4 X	5500.000	64.42	37.92	102.34	74.00	28.34	peak	No Limit
5 *	5500.000	55.88	37.92	93.80	54.00	39.80	AVG	No Limit


測試頻道: IEEE 802.11ac (VHT20) / 5500 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Horizontal

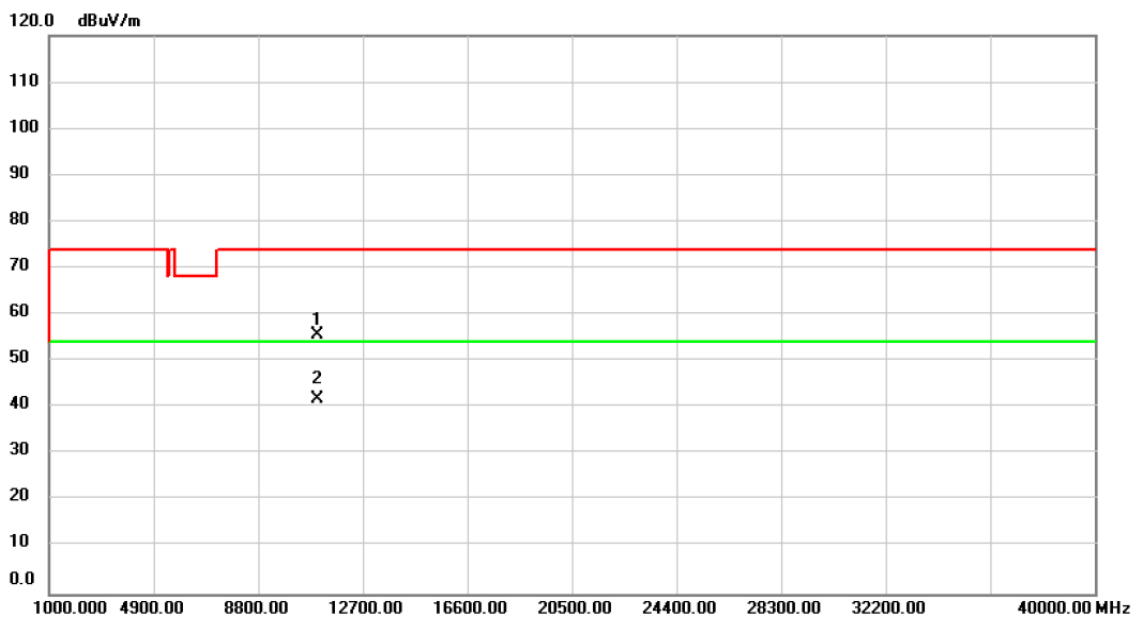

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	52.86	2.85	55.71	74.00	-18.29	peak	
2	*	11000.00	39.10	2.85	41.95	54.00	-12.05	AVG	


測試頻道: IEEE 802.11ac (VHT20) / 5580 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

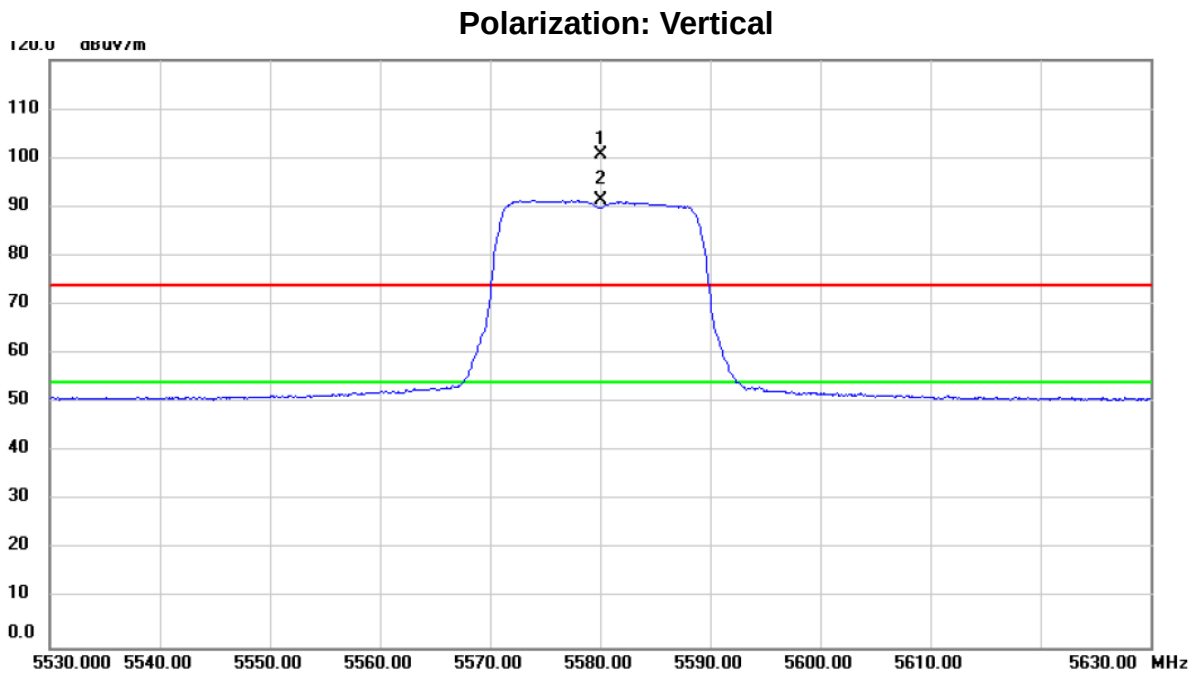

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5580.000	62.40	38.14	100.54	74.00	26.54	peak	No Limit
2	*	5580.000	53.24	38.14	91.38	54.00	37.38	AVG	No Limit


測試頻道: IEEE 802.11ac (VHT20) / 5580
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

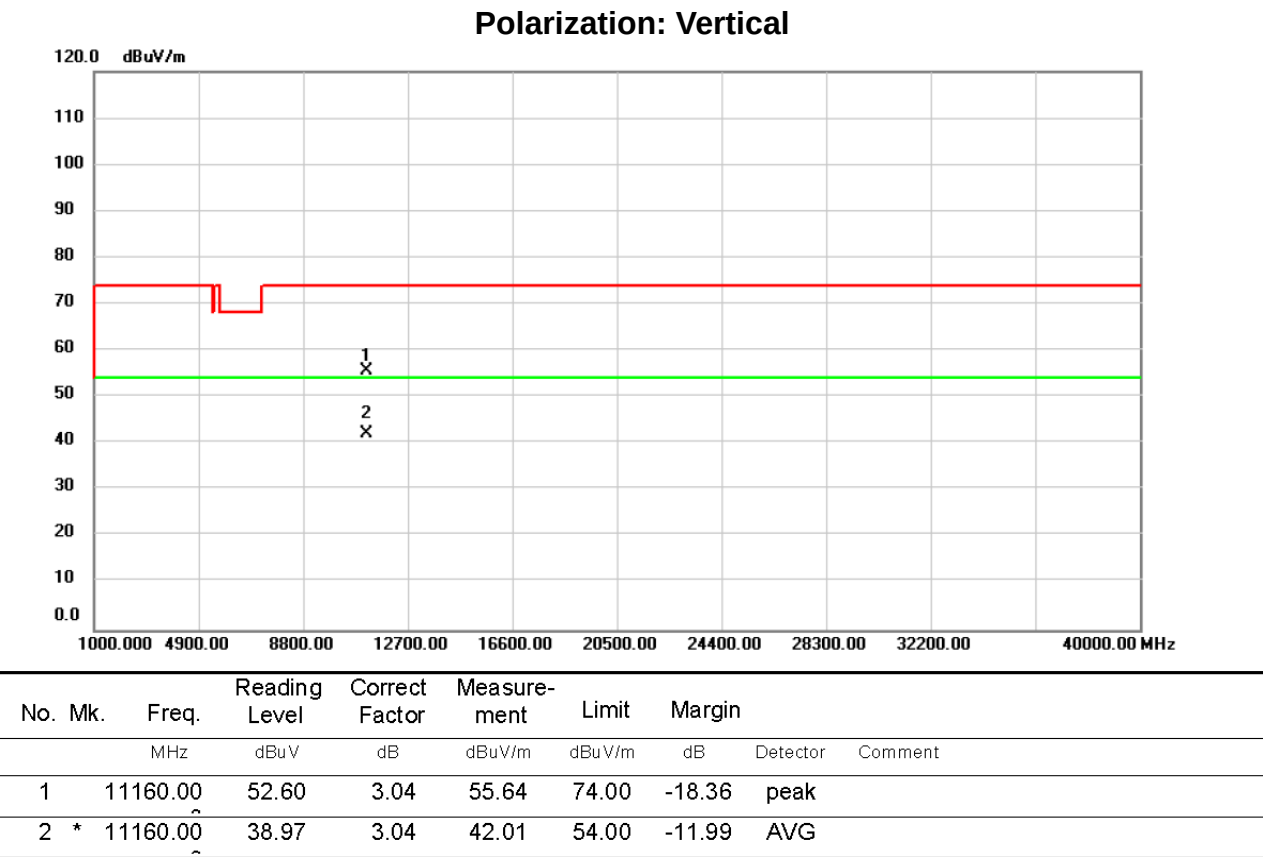

測試頻道: IEEE 802.11ac (VHT20) / 5580 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Horizontal

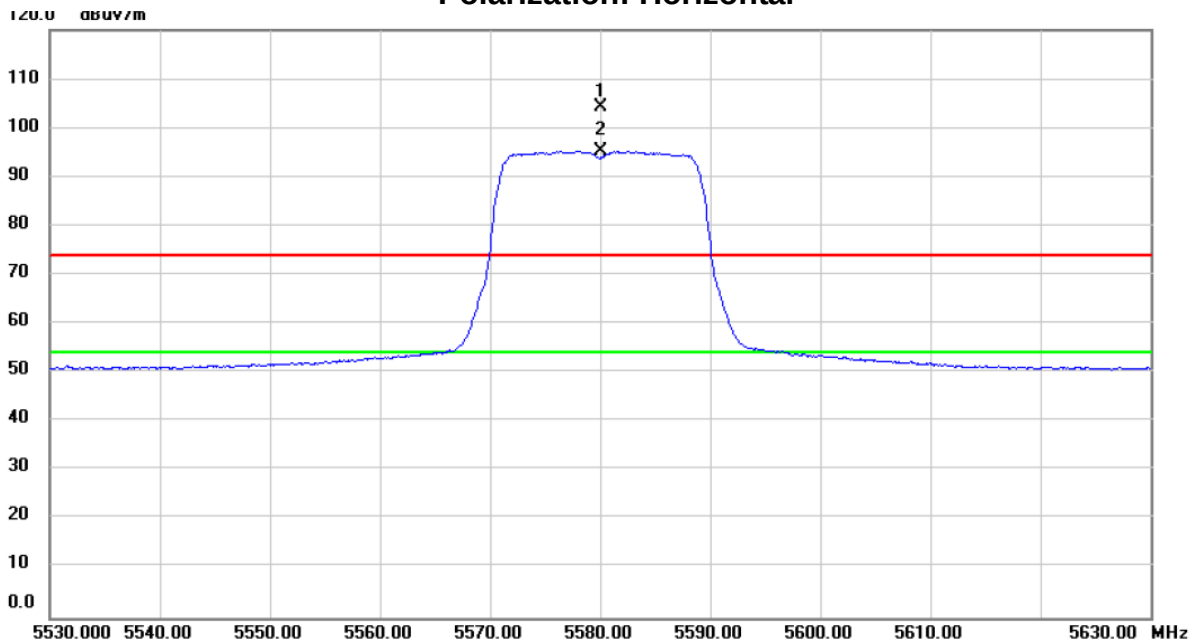

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5580.000	65.97	38.14	104.11	74.00	30.11	peak	No Limit
2	*	5580.000	57.06	38.14	95.20	54.00	41.20	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5580
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

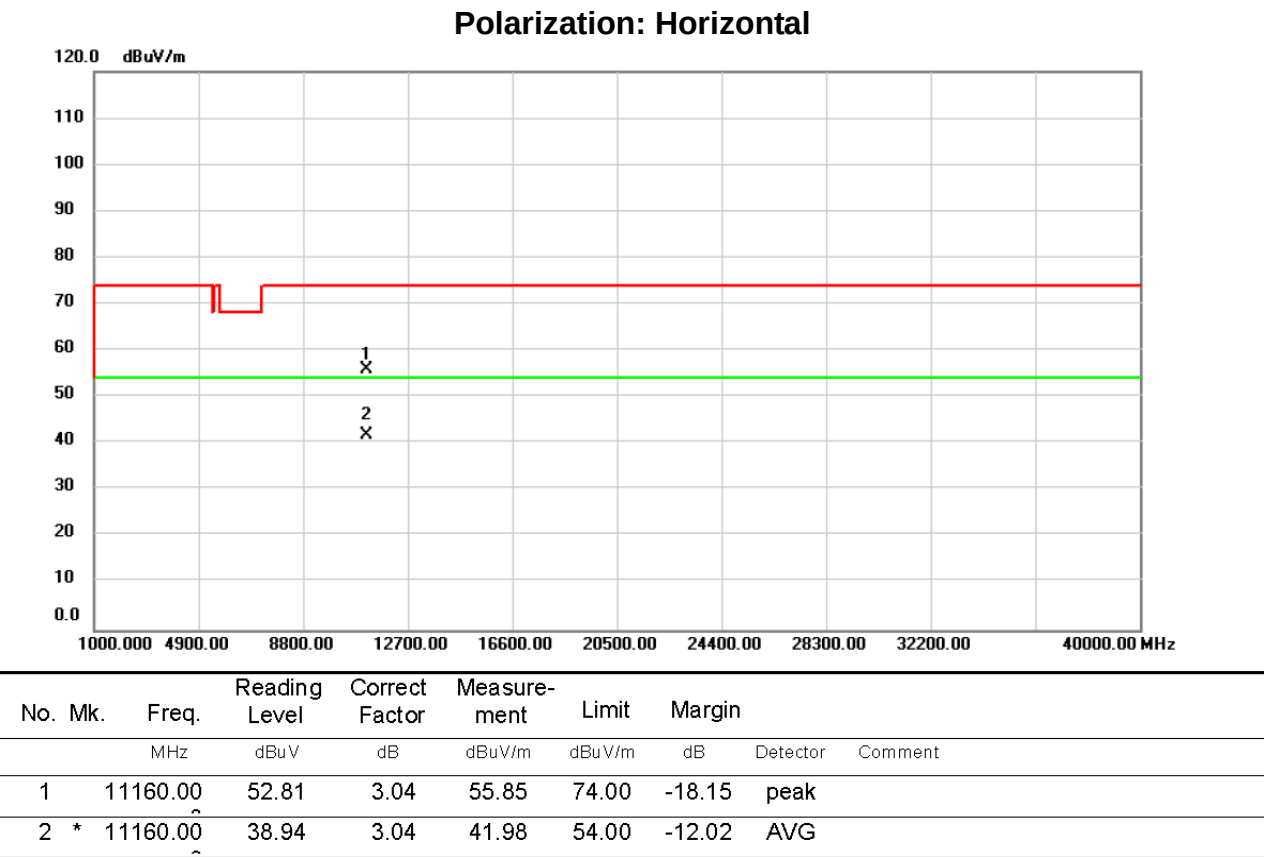

測試頻道: IEEE 802.11ac (VHT20) / 5700
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

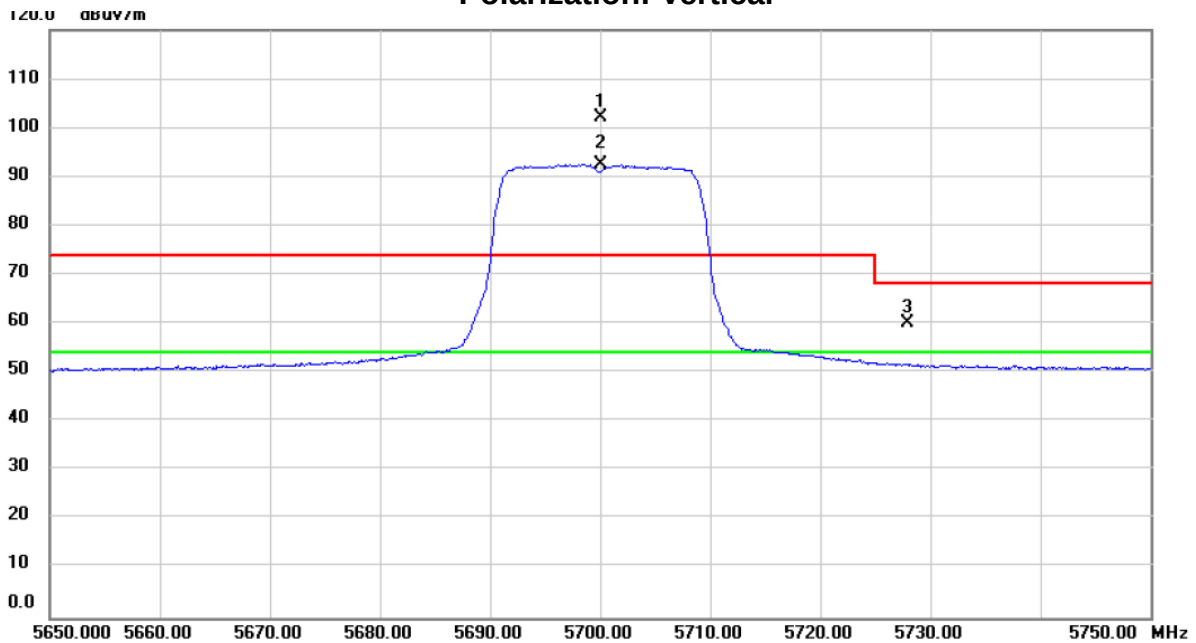

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 X	5700.000	63.71	38.46	102.17	74.00	28.17	peak	No Limit
2 *	5700.000	53.99	38.46	92.45	54.00	38.45	AVG	No Limit
3	5727.875	21.61	38.54	60.15	68.20	-8.05	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5700 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Vertical

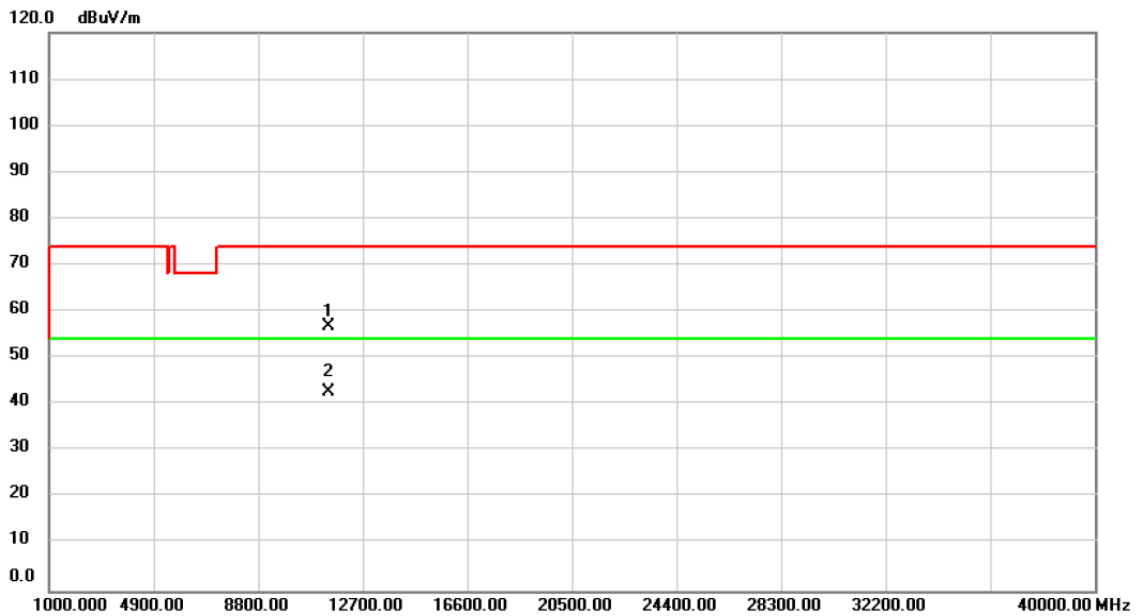

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	53.48	3.30	56.78	74.00	-17.22	peak	
2	*	11400.00	39.36	3.30	42.66	54.00	-11.34	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5700 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%


Polarization: Horizontal

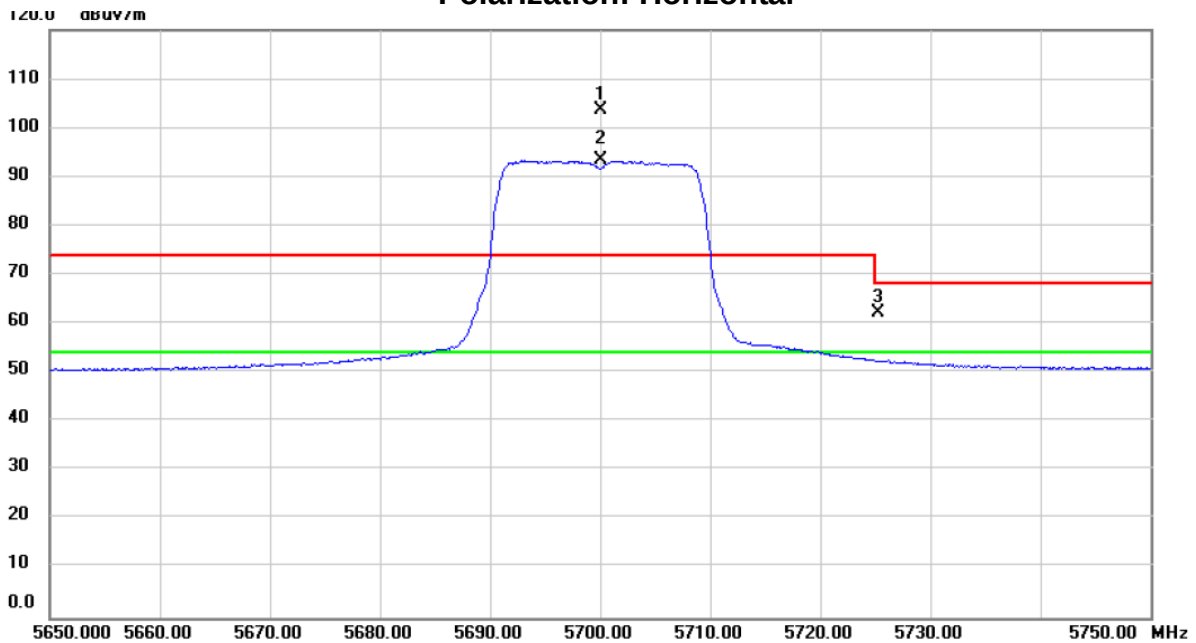

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5700.000	65.06	38.46	103.52	74.00	29.52	peak	No Limit
2	*	5700.000	55.11	38.46	93.57	54.00	39.57	AVG	No Limit
3		5725.275	23.71	38.53	62.24	68.20	-5.96	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5700
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

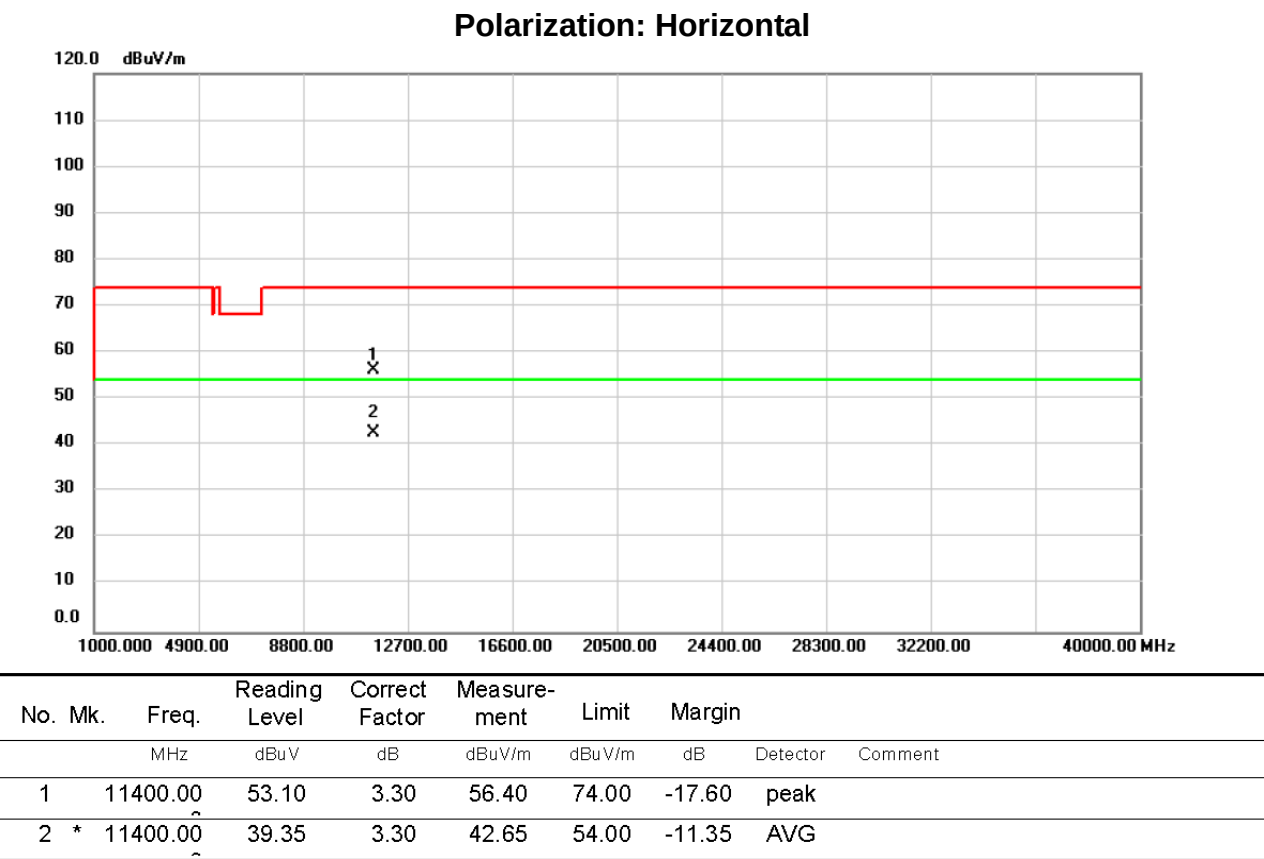

測試頻道: IEEE 802.11ac (VHT40) / 5510
MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%

Polarization: Vertical

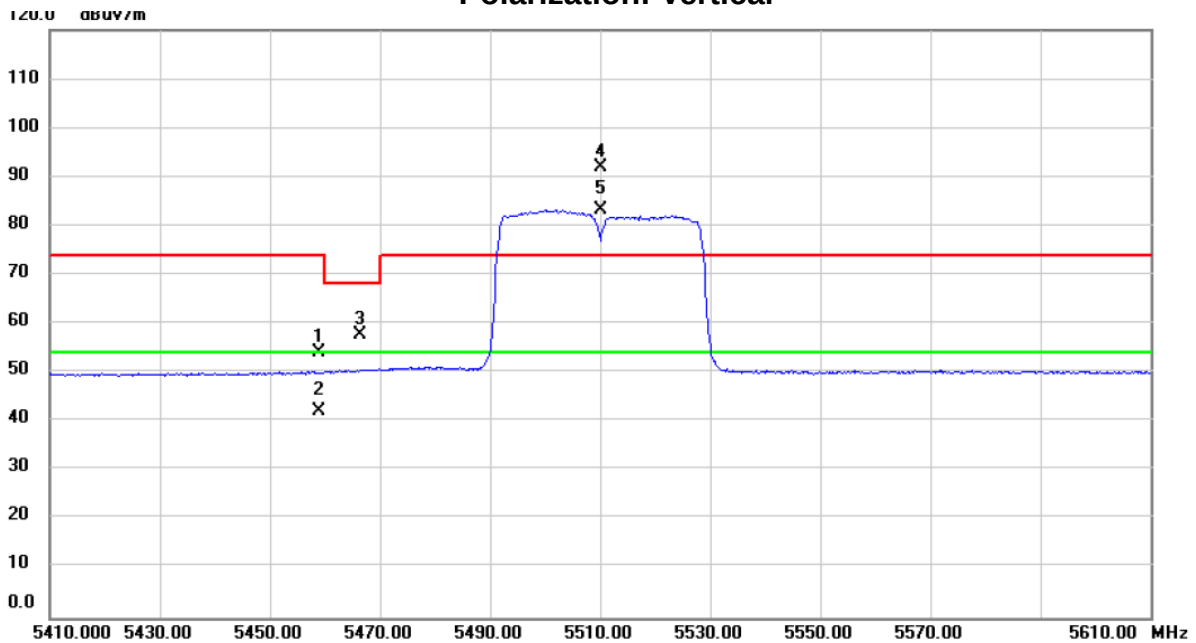


Io. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.050	16.37	37.88	54.25	74.00	-19.75	peak	
2	5459.050	4.20	37.88	42.08	54.00	-11.92	AVG	
3	5466.330	19.96	37.88	57.84	68.20	-10.36	peak	
4 X	5510.000	53.94	37.95	91.89	74.00	17.89	peak	No Limit
5 *	5510.000	45.24	37.95	83.19	54.00	29.19	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT40) / 5510
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Vertical

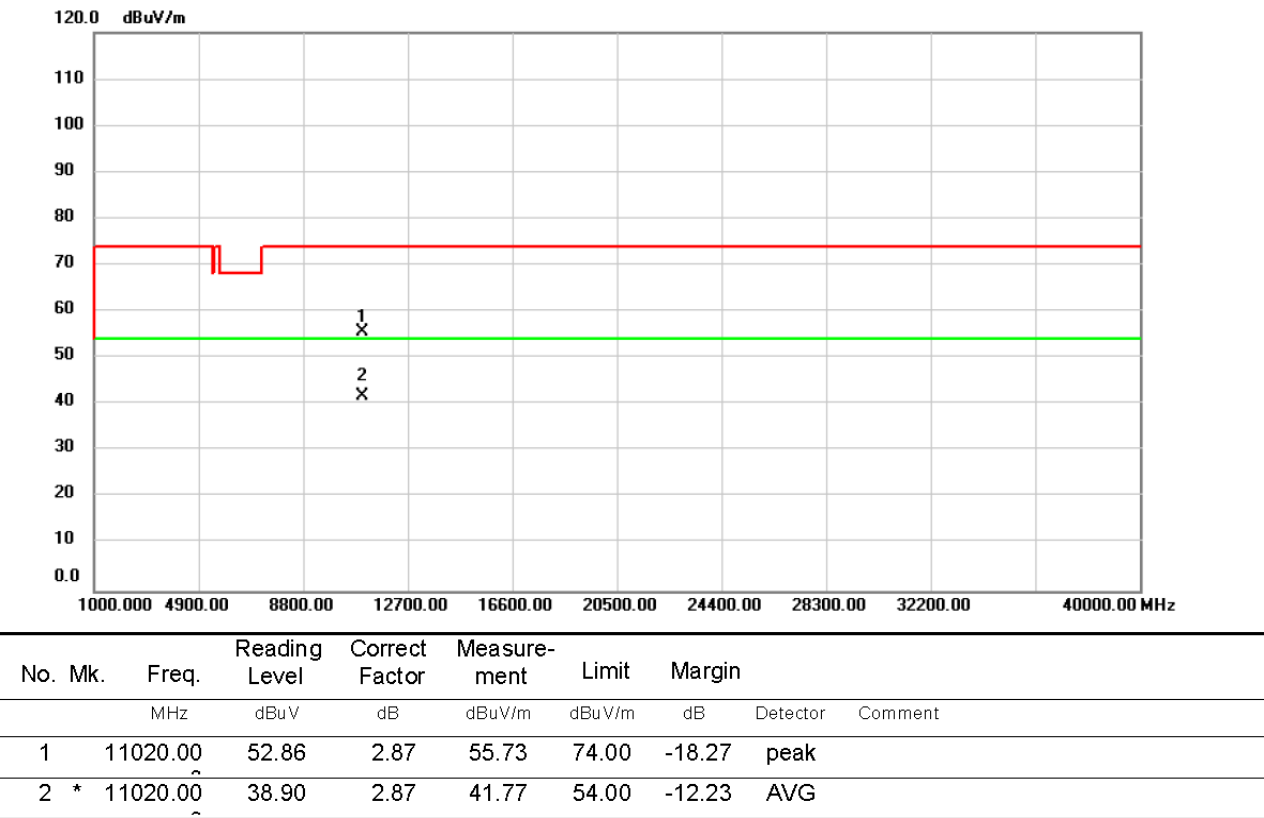

測試頻道: IEEE 802.11ac (VHT40) / 5510 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%

Polarization: Horizontal

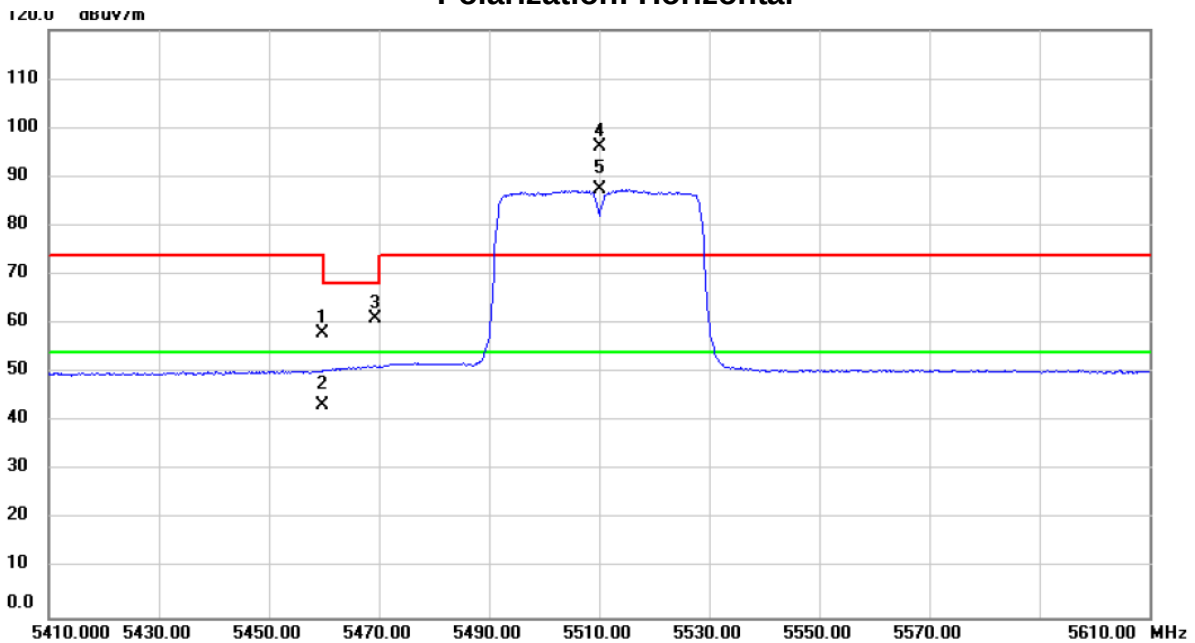


Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5459.600	20.05	37.88	57.93	74.00	-16.07	peak	
2	5459.600	5.54	37.88	43.42	54.00	-10.58	AVG	
3	5469.210	23.02	37.89	60.91	68.20	-7.29	peak	
4 X	5510.000	58.14	37.95	96.09	74.00	22.09	peak	No Limit
5 *	5510.000	49.43	37.95	87.38	54.00	33.38	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT40) / 5510 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Horizontal

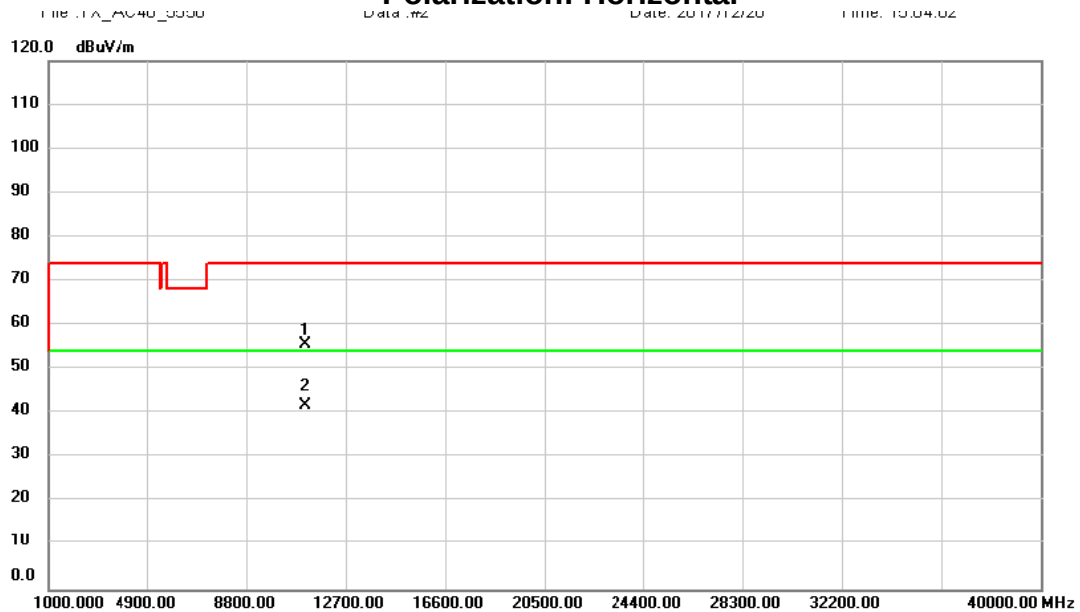

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	52.71	2.97	55.68	74.00	-18.32	peak	
2	*	11100.00	38.74	2.97	41.71	54.00	-12.29	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5550 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Vertical

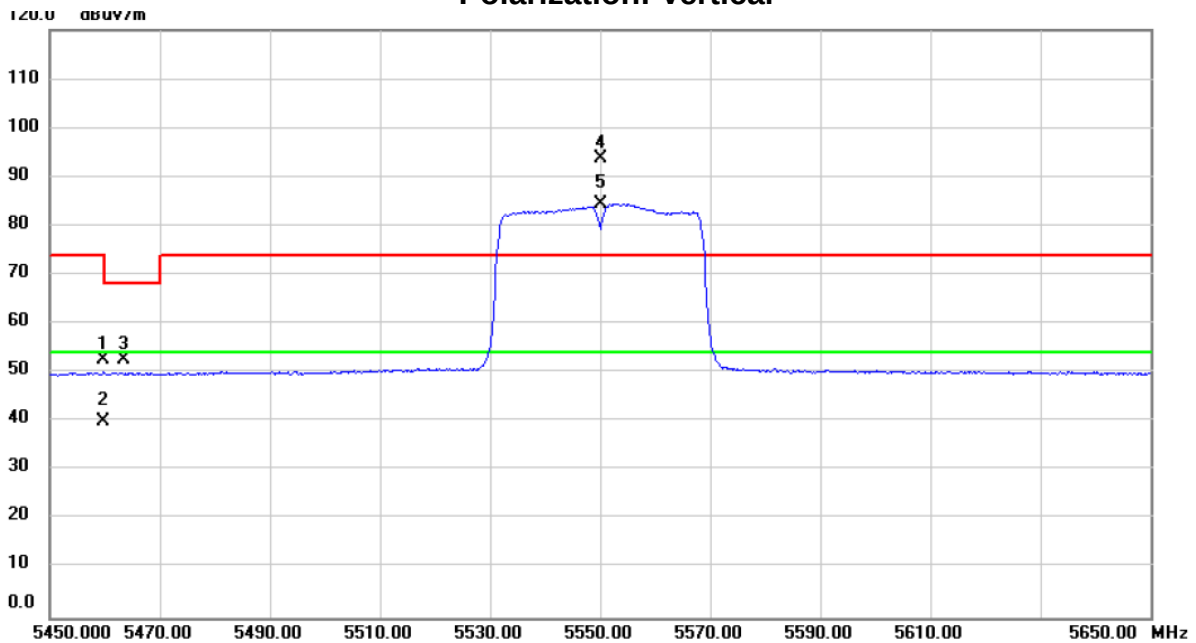

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5459.840	14.71	37.88	52.59	74.00	-21.41	peak	
2	5459.840	2.23	37.88	40.11	54.00	-13.89	AVG	
3	5463.350	14.74	37.88	52.62	68.20	-15.58	peak	
4 X	5550.000	55.57	38.06	93.63	74.00	19.63	peak	No Limit
5 *	5550.000	46.41	38.06	84.47	54.00	30.47	AVG	No Limit


測試頻道: IEEE 802.11ac (VHT40) / 5550
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

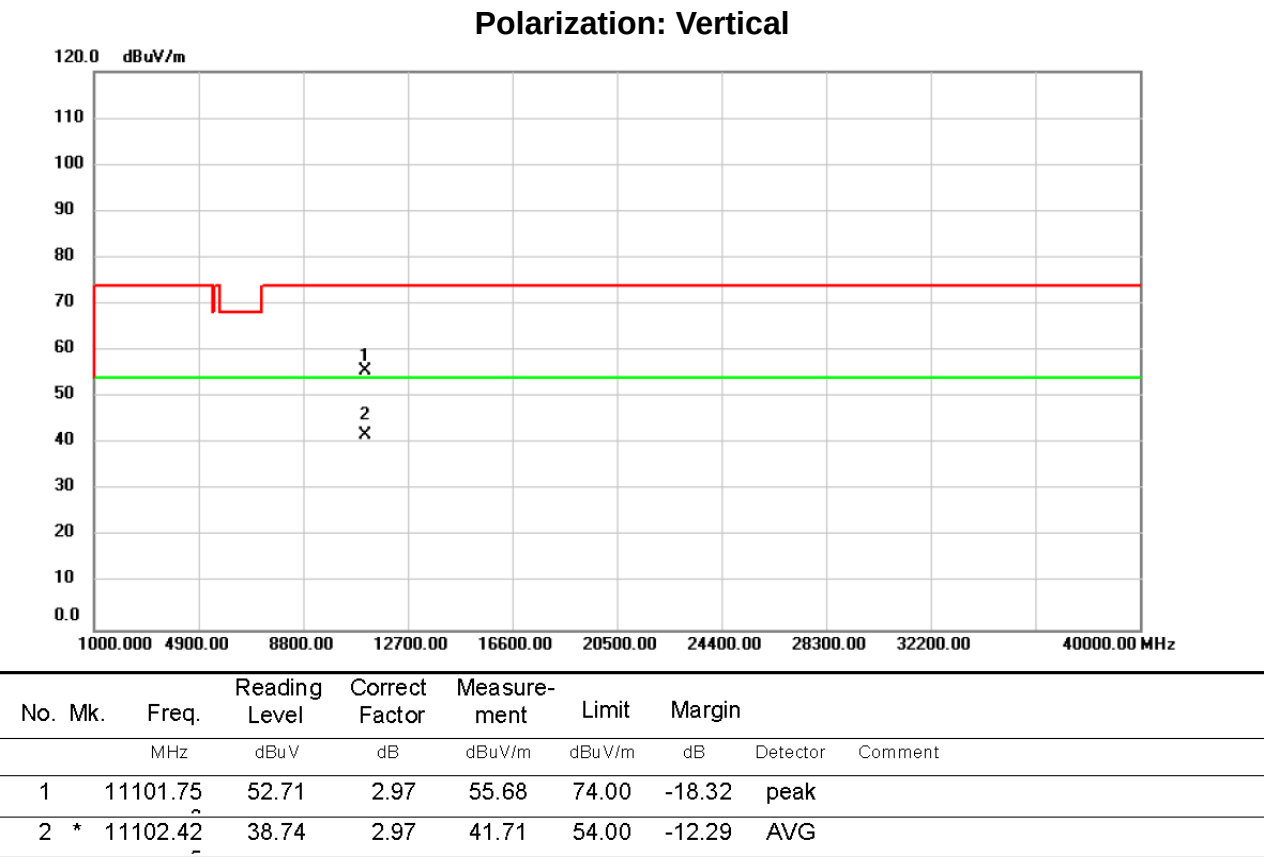

測試頻道: IEEE 802.11ac (VHT40) / 5550 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Horizontal

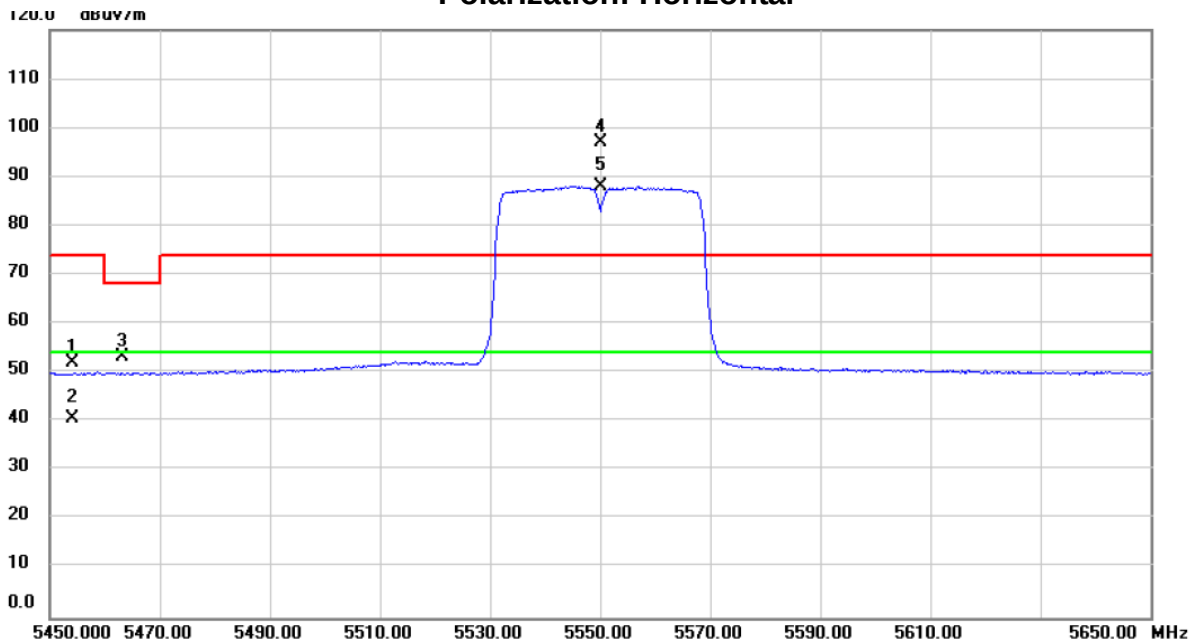

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5454.100	14.31	37.87	52.18	74.00	-21.82	peak	
2	5454.100	2.71	37.87	40.58	54.00	-13.42	AVG	
3	5463.330	15.33	37.88	53.21	68.20	-14.99	peak	
4 X	5550.000	58.87	38.06	96.93	74.00	22.93	peak	No Limit
5 *	5550.000	50.08	38.06	88.14	54.00	34.14	AVG	No Limit


測試頻道: IEEE 802.11ac (VHT40) / 5550
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

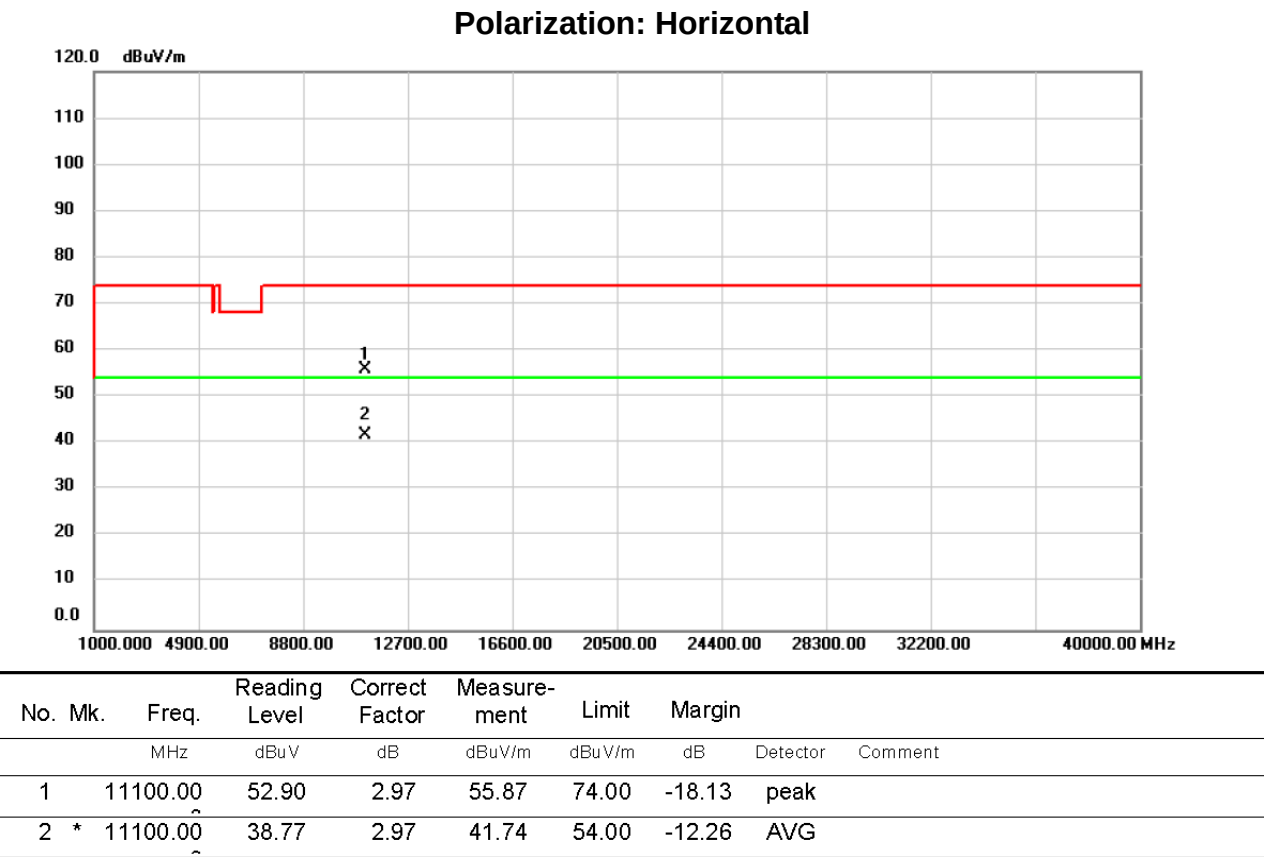

測試頻道: IEEE 802.11ac (VHT40) / 5670 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Vertical

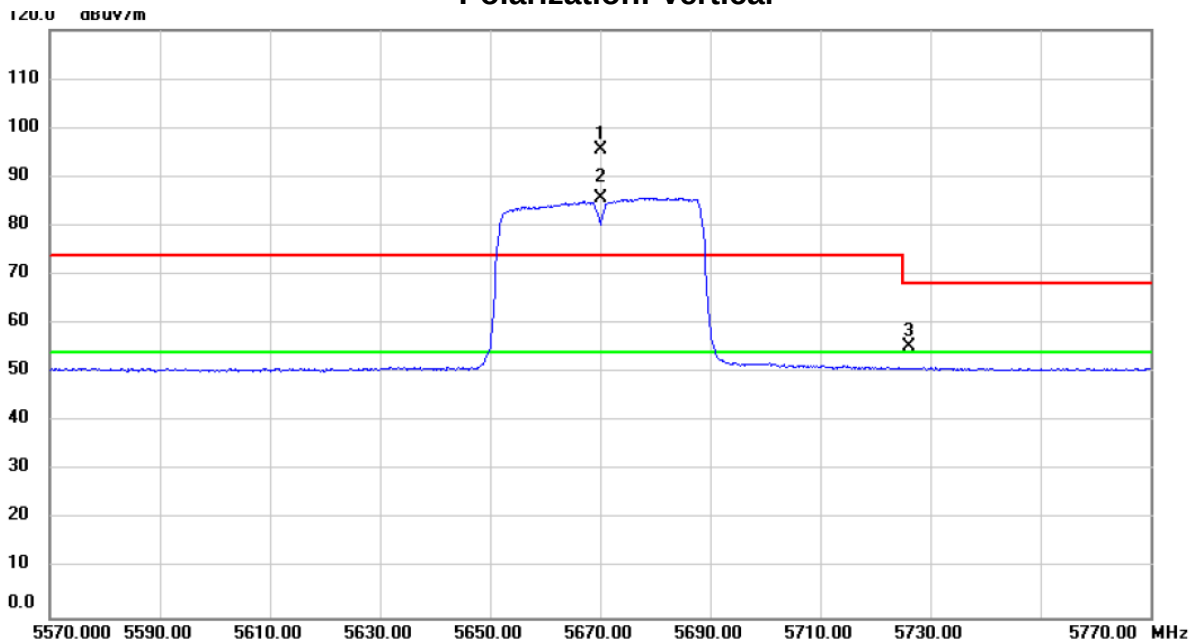

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 X	5670.000	57.06	38.38	95.44	74.00	21.44	peak	No Limit
2 *	5670.000	47.41	38.38	85.79	54.00	31.79	AVG	No Limit
3	5726.215	16.80	38.53	55.33	68.20	-12.87	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5670 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Vertical

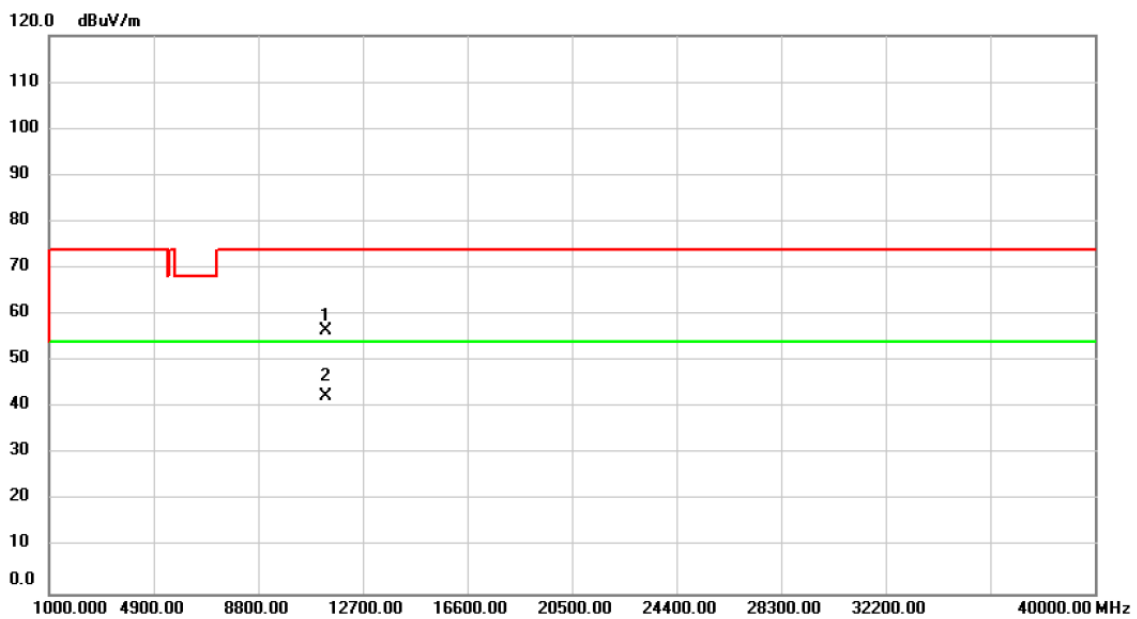

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	53.26	3.23	56.49	74.00	-17.51	peak	
2	*	11340.00	39.13	3.23	42.36	54.00	-11.64	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5670
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Horizontal

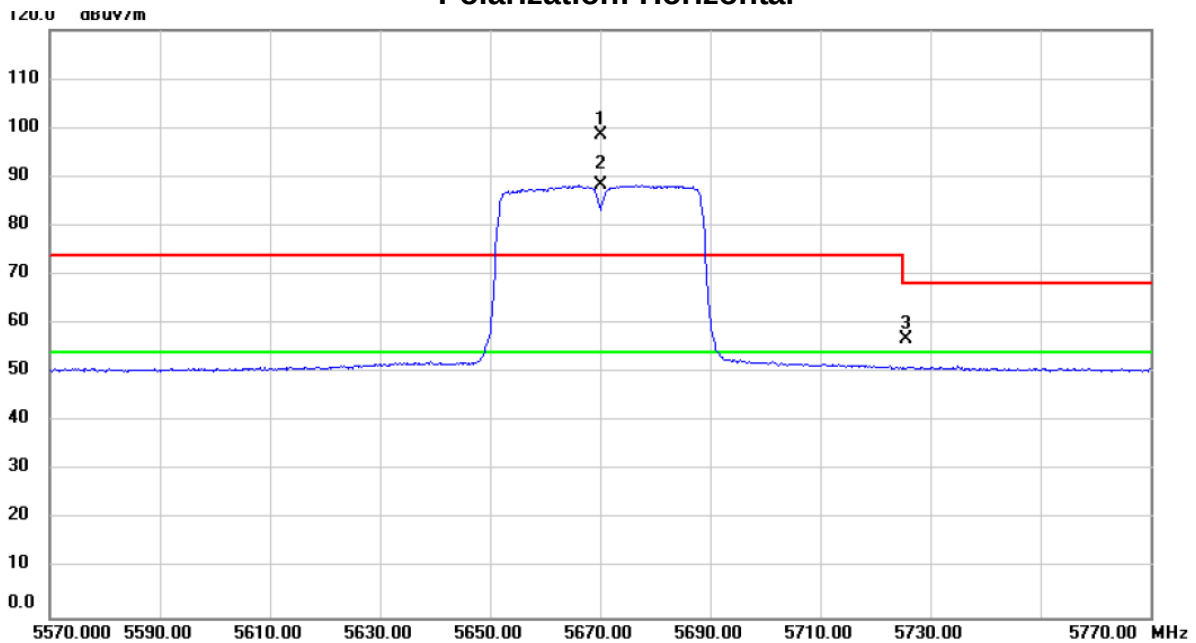


Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5670.000	60.18	38.38	98.56	74.00	24.56	peak	No Limit
2	*	5670.000	49.96	38.38	88.34	54.00	34.34	AVG	No Limit
3		5725.720	18.39	38.53	56.92	68.20	-11.28	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5670 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

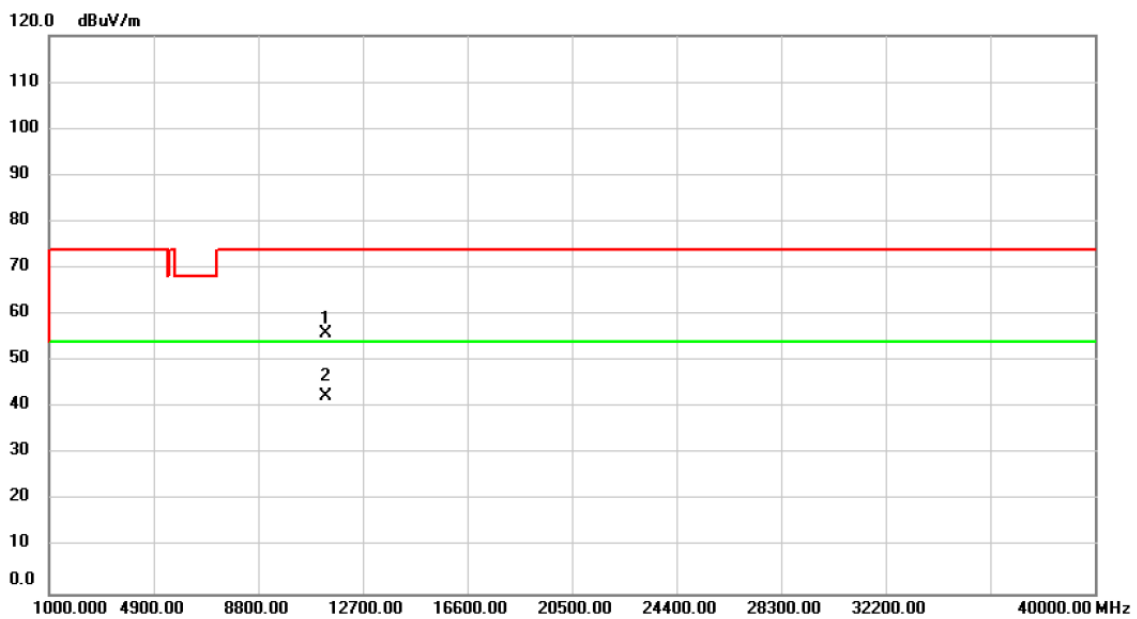

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	52.86	3.23	56.09	74.00	-17.91	peak	
2	*	11340.00	39.11	3.23	42.34	54.00	-11.66	AVG	


測試頻道: IEEE 802.11ac (VHT80) / 5530 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

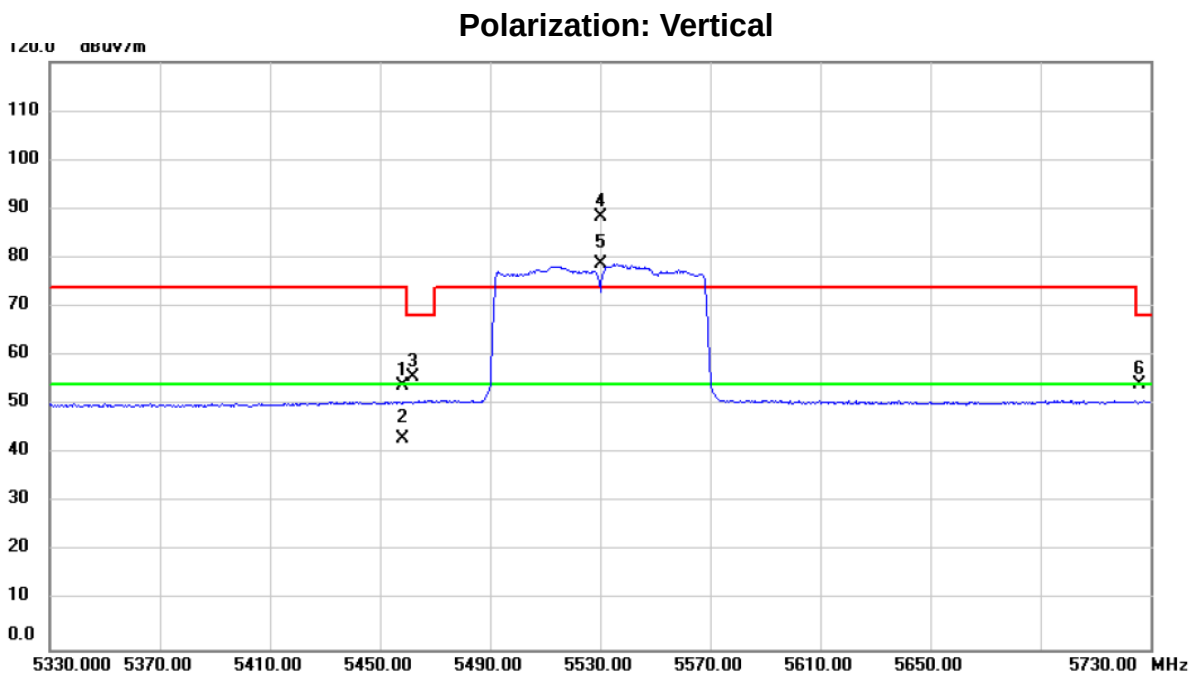

Io. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.050	15.90	37.87	53.77	74.00	-20.23	peak	
2	5458.050	5.20	37.87	43.07	54.00	-10.93	AVG	
3	5462.200	17.81	37.88	55.69	68.20	-12.51	peak	
4 X	5530.000	50.46	38.00	88.46	74.00	14.46	peak	No Limit
5 *	5530.000	40.72	38.00	78.72	54.00	24.72	AVG	No Limit
6	5726.030	15.60	38.53	54.13	68.20	-14.07	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5530 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Vertical

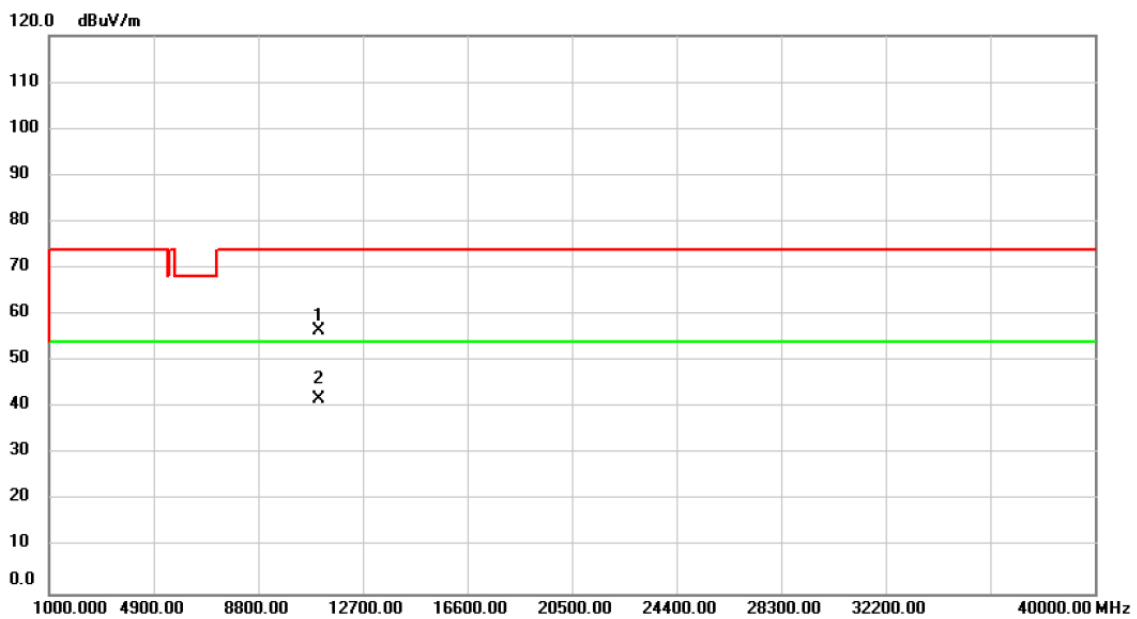

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	53.62	2.92	56.54	74.00	-17.46	peak	
2	*	11060.00	38.91	2.92	41.83	54.00	-12.17	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5530
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Horizontal

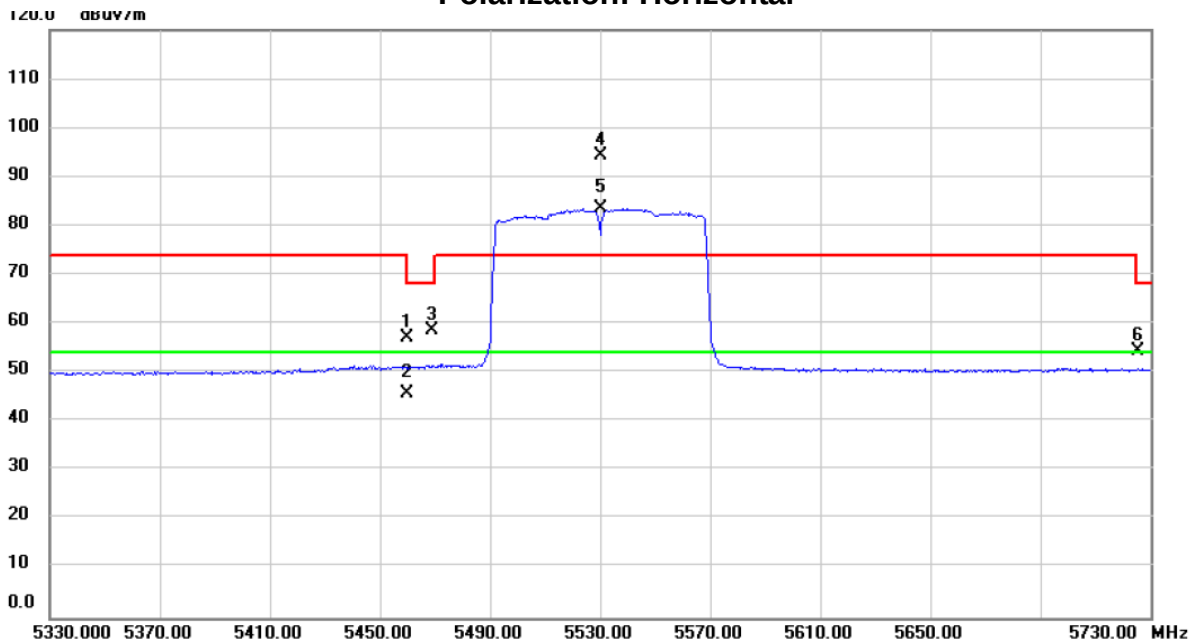

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5459.870	19.26	37.88	57.14	74.00	-16.86	peak	
2	5459.870	7.83	37.88	45.71	54.00	-8.29	AVG	
3	5469.200	20.66	37.89	58.55	68.20	-9.65	peak	
4 X	5530.000	56.43	38.00	94.43	74.00	20.43	peak	No Limit
5 *	5530.000	45.59	38.00	83.59	54.00	29.59	AVG	No Limit
6	5725.395	15.99	38.53	54.52	68.20	-13.68	peak	


測試頻道: IEEE 802.11ac (VHT80) / 5530 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Horizontal

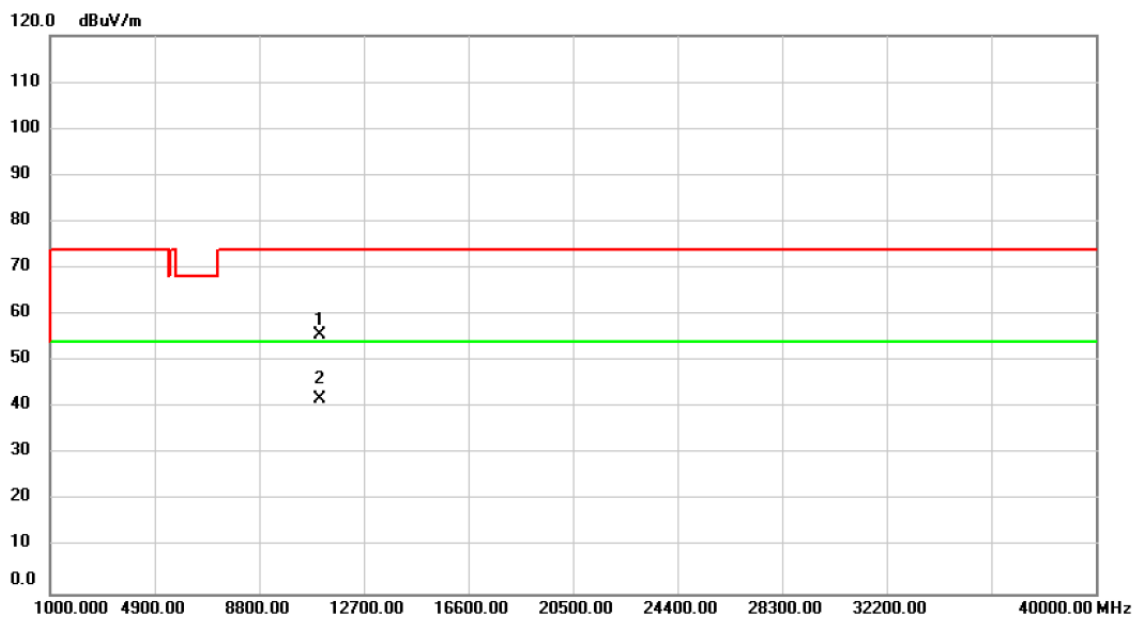

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	52.84	2.92	55.76	74.00	-18.24	peak	
2	*	11060.00	38.90	2.92	41.82	54.00	-12.18	AVG	


測試頻道: IEEE 802.11ac (VHT80) / 5610 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%

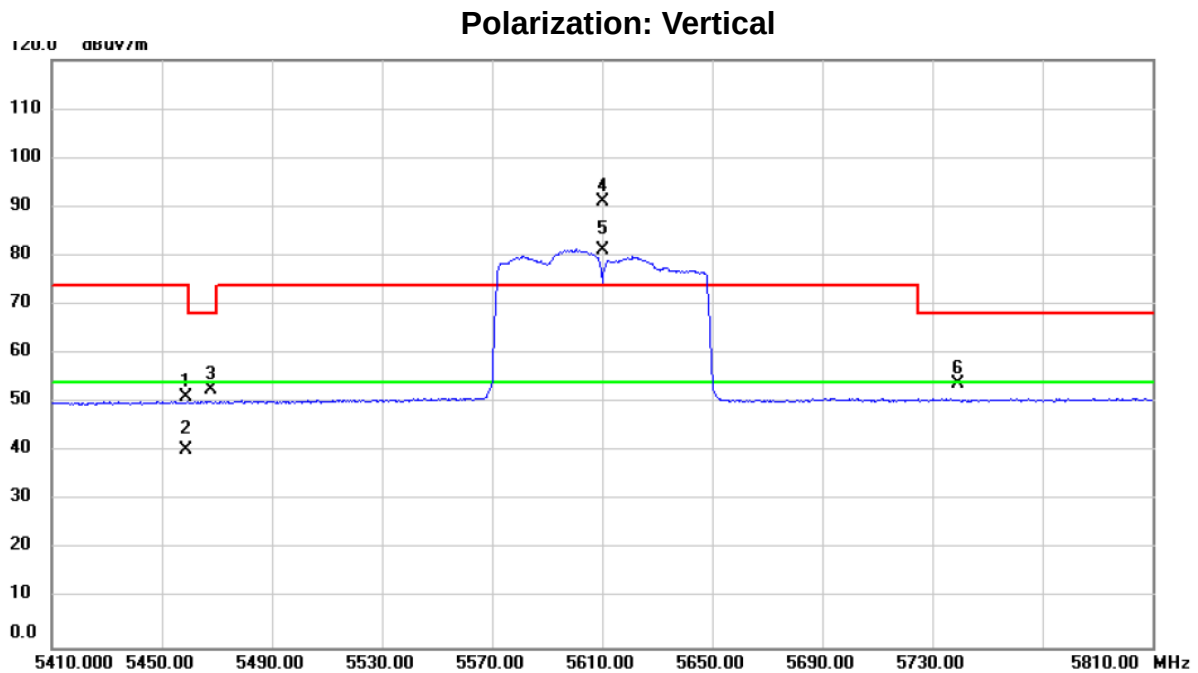

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5459.000	13.42	37.88	51.30	74.00	-22.70	peak	
2	5459.000	2.56	37.88	40.44	54.00	-13.56	AVG	
3	5468.010	14.85	37.88	52.73	68.20	-15.47	peak	
4 X	5610.000	52.93	38.22	91.15	74.00	17.15	peak	No Limit
5 *	5610.000	42.87	38.22	81.09	54.00	27.09	AVG	No Limit
6	5739.195	15.43	38.57	54.00	68.20	-14.20	peak	


測試頻道: IEEE 802.11ac (VHT80) / 5610
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

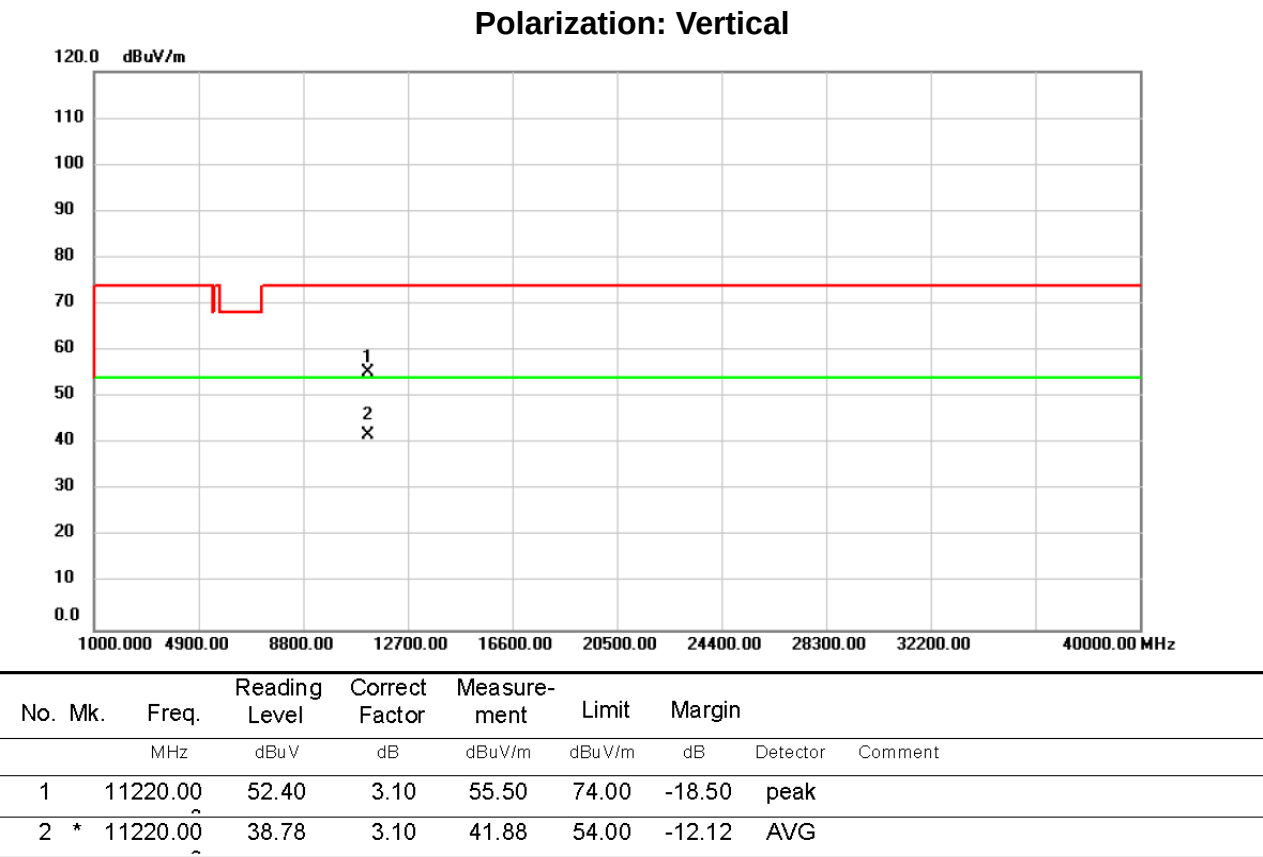

測試頻道: IEEE 802.11ac (VHT80) / 5610 MHz
測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz
視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna
測試距離: 3 米
檢 測 器: Peak/AV
測試日期: 107/01/02
環境溫度: 23°C
環境濕度: 70%


Polarization: Horizontal

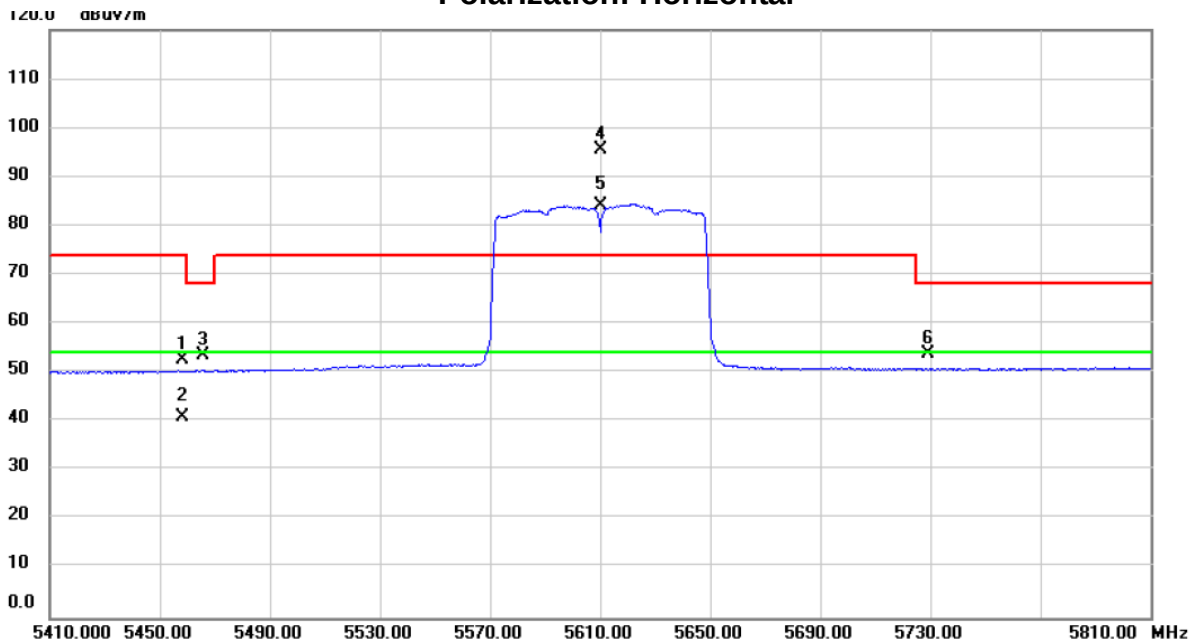

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5458.500	14.69	37.88	52.57	74.00	-21.43	peak	
2	5458.500	3.09	37.88	40.97	54.00	-13.03	AVG	
3	5465.920	15.66	37.88	53.54	68.20	-14.66	peak	
4 X	5610.000	57.37	38.22	95.59	74.00	21.59	peak	No Limit
5 *	5610.000	46.00	38.22	84.22	54.00	30.22	AVG	No Limit
6	5728.995	15.24	38.55	53.79	68.20	-14.41	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5610
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

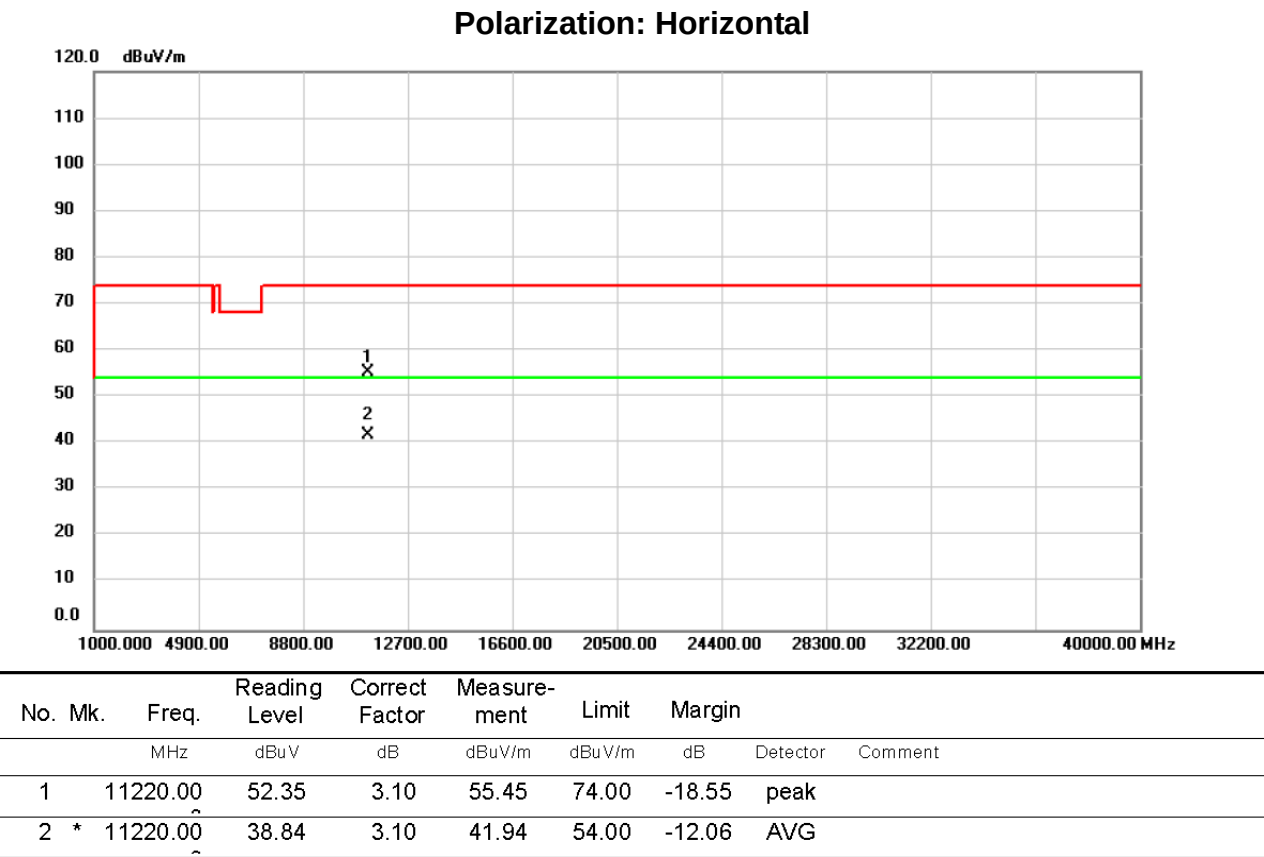

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Vertical

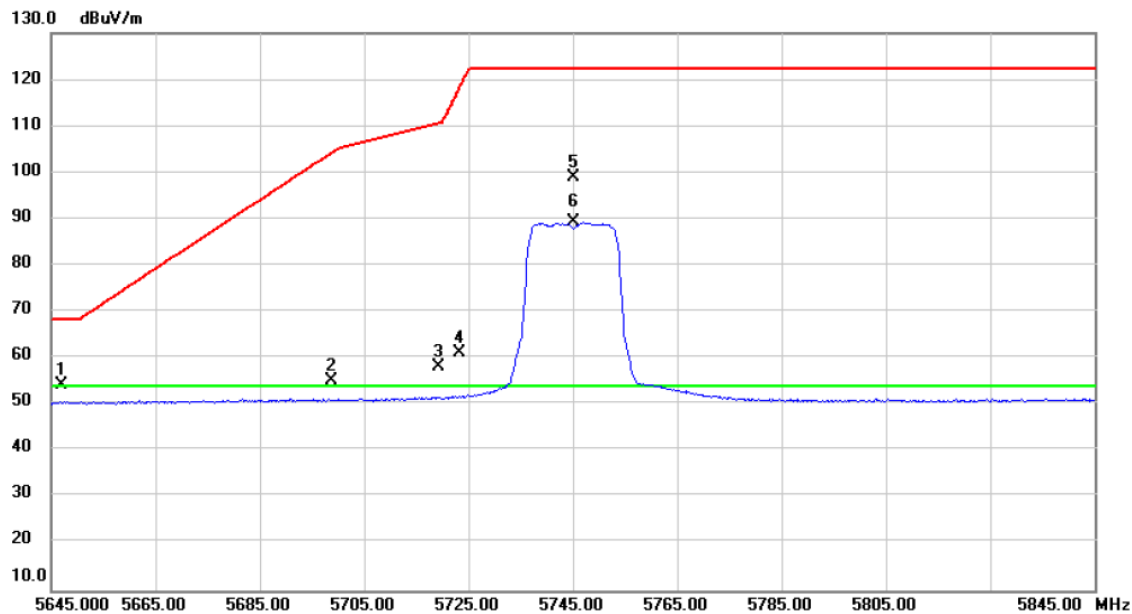

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5646.965	16.00	38.32	54.32	68.20	-13.88	peak	
2		5698.600	16.78	38.46	55.24	104.17	-48.93	peak	
3		5719.380	19.77	38.52	58.29	110.63	-52.34	peak	
4		5723.244	22.67	38.53	61.20	118.20	-57.00	peak	
5		5745.000	60.30	38.58	98.88	122.20	-23.32	peak	No Limit
6	*	5745.000	50.74	38.58	89.32	54.00	35.32	AVG	No Limit

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

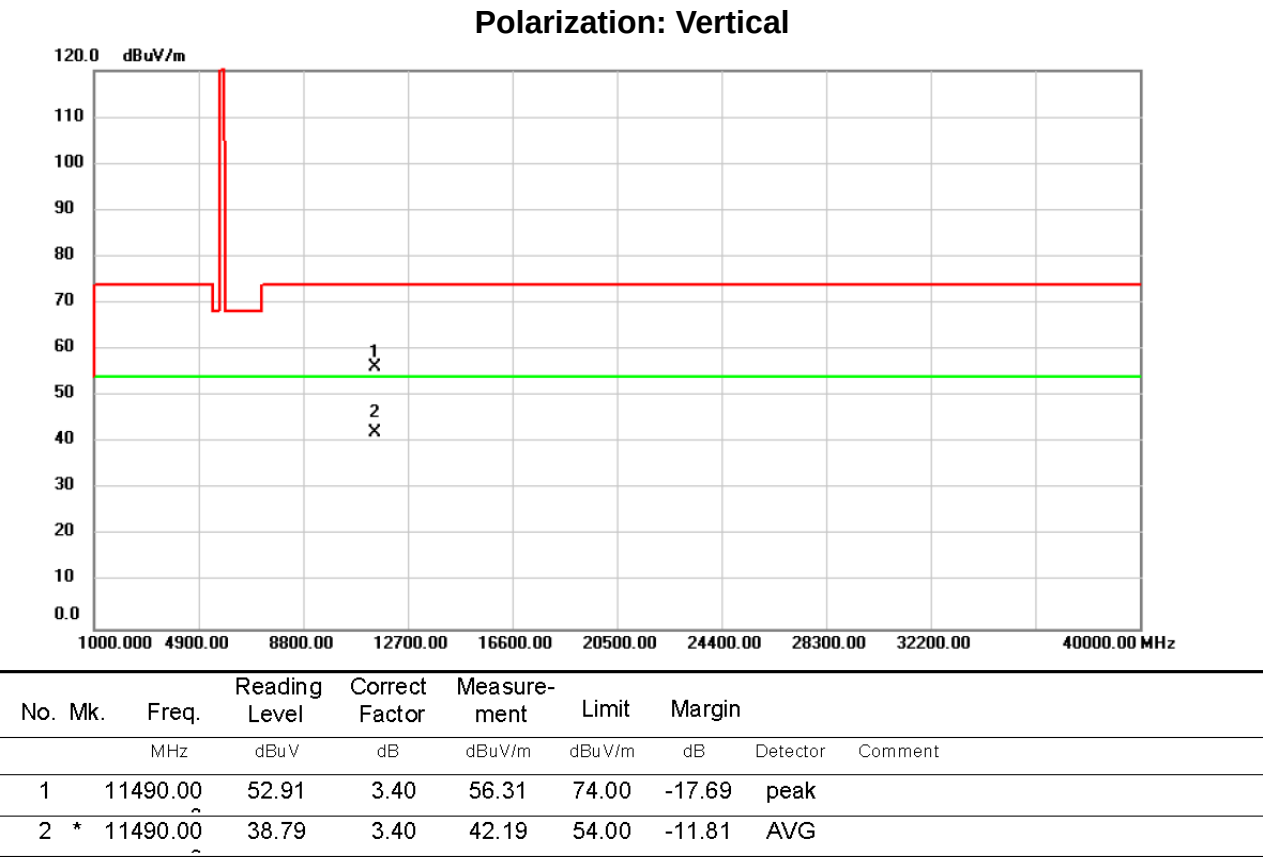

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%


Polarization: Horizontal

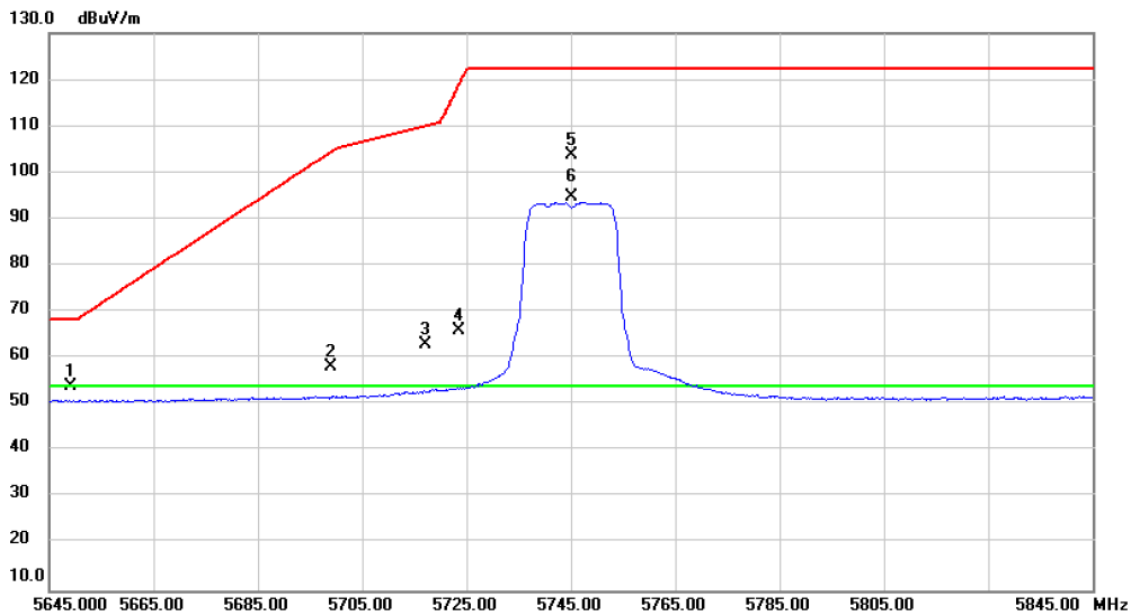

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5649.045	15.59	38.33	53.92	68.20	-14.28	peak	
2		5699.050	19.63	38.46	58.09	104.50	-46.41	peak	
3		5717.100	24.54	38.51	63.05	109.99	-46.94	peak	
4		5723.439	27.31	38.53	65.84	118.64	-52.80	peak	
5		5745.000	65.12	38.58	103.70	122.20	-18.50	peak	No Limit
6	*	5745.000	56.09	38.58	94.67	54.00	40.67	AVG	No Limit

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

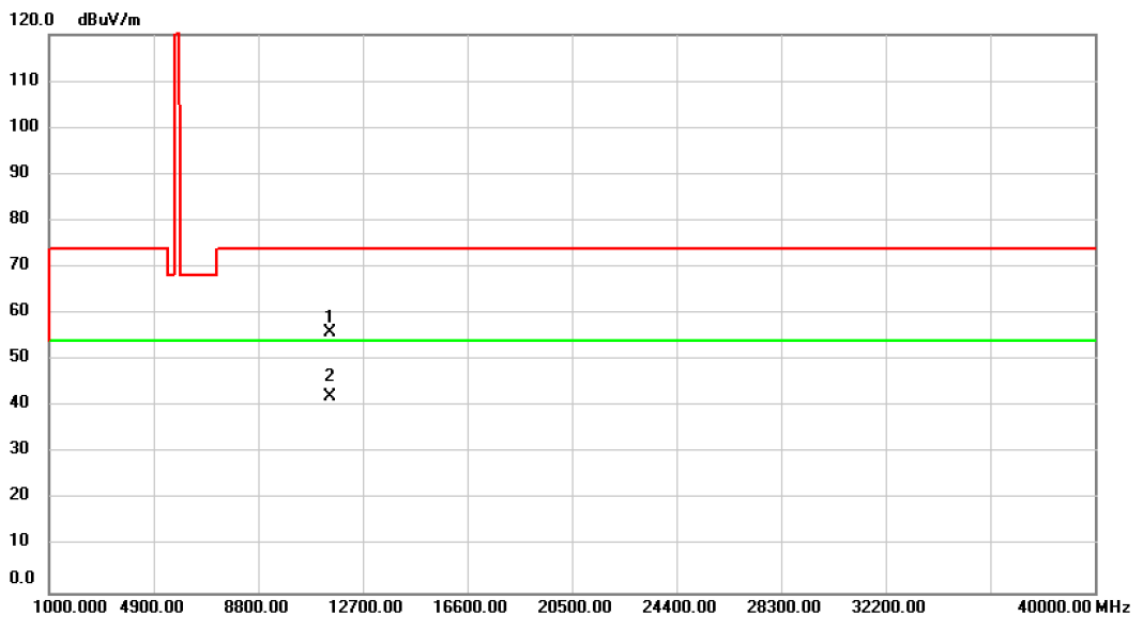
Polarization: Horizontal

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	52.61	3.40	56.01	74.00	-17.99	peak	
2	*	11490.00	38.83	3.40	42.23	54.00	-11.77	AVG	

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%


Polarization: Vertical

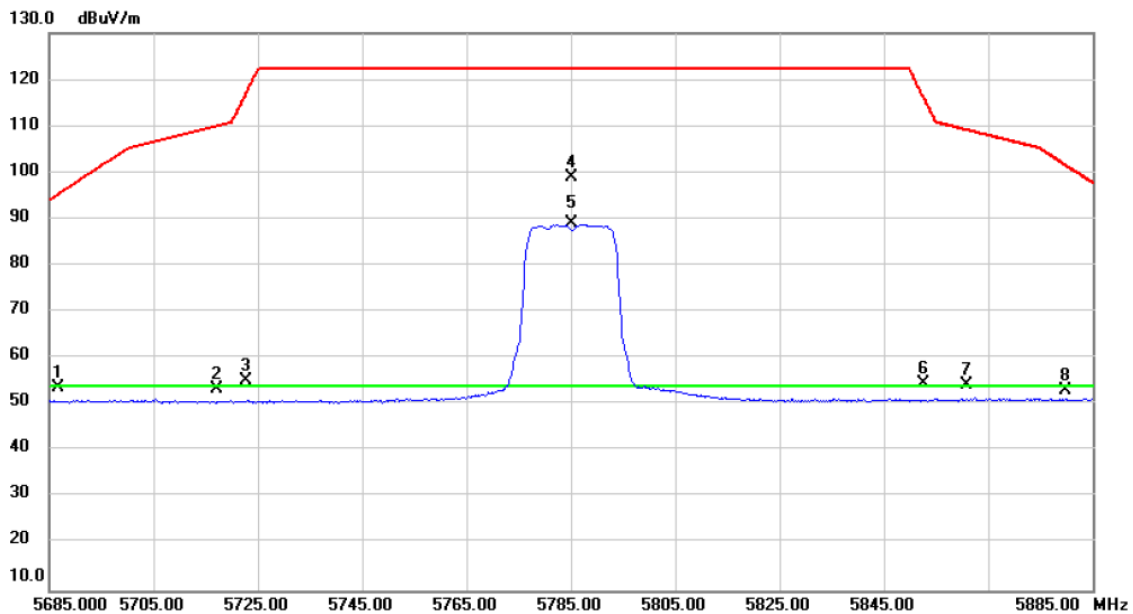

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5686.635	15.18	38.43	53.61	95.34	-41.73	peak	
2		5717.240	14.82	38.51	53.33	110.03	-56.70	peak	
3		5722.740	16.60	38.53	55.13	117.05	-61.92	peak	
4		5785.000	60.40	38.70	99.10	122.20	-23.10	peak	No Limit
5	*	5785.000	50.27	38.70	88.97	54.00	34.97	AVG	No Limit
6		5852.625	15.71	38.87	54.58	116.21	-61.63	peak	
7		5860.920	15.39	38.90	54.29	109.14	-54.85	peak	
8		5879.730	13.99	38.96	52.95	101.69	-48.74	peak	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

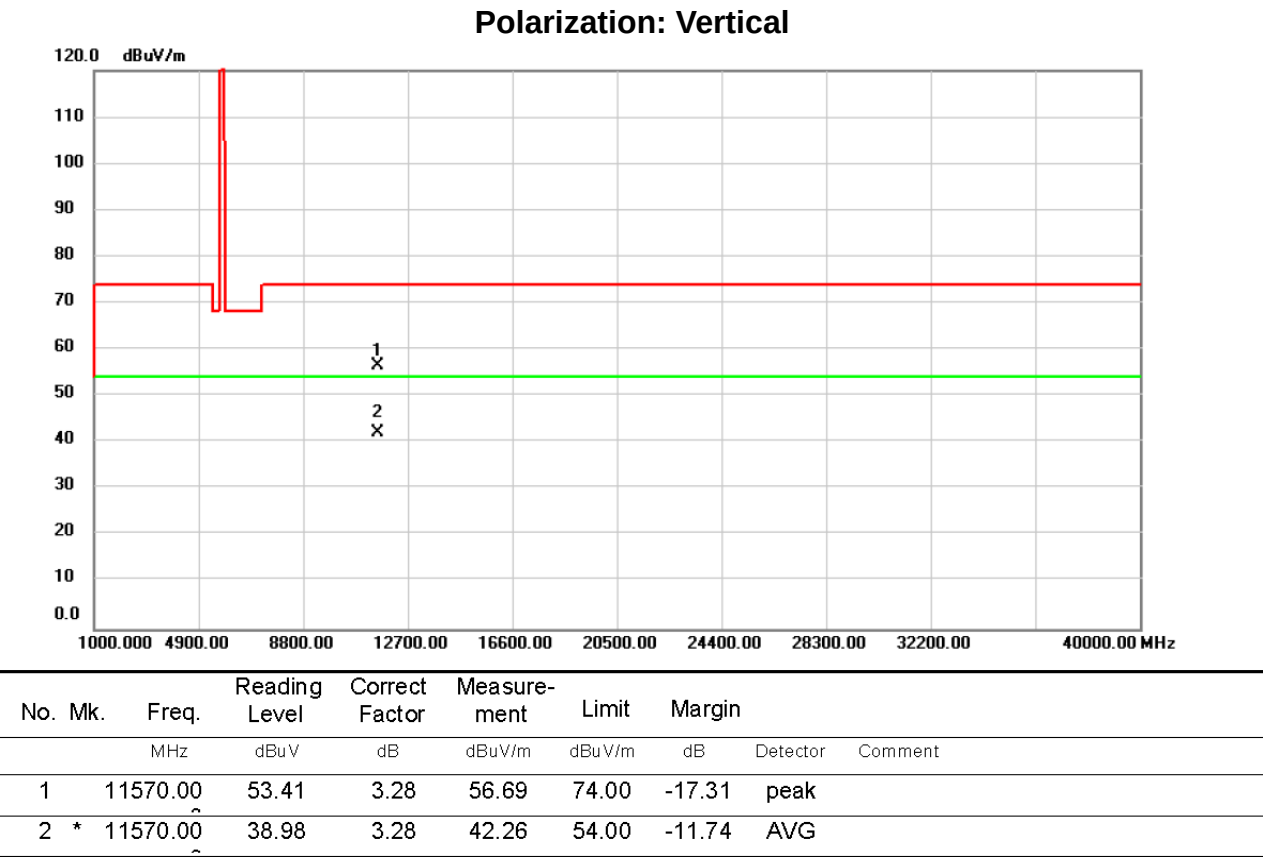

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

Polarization: Horizontal

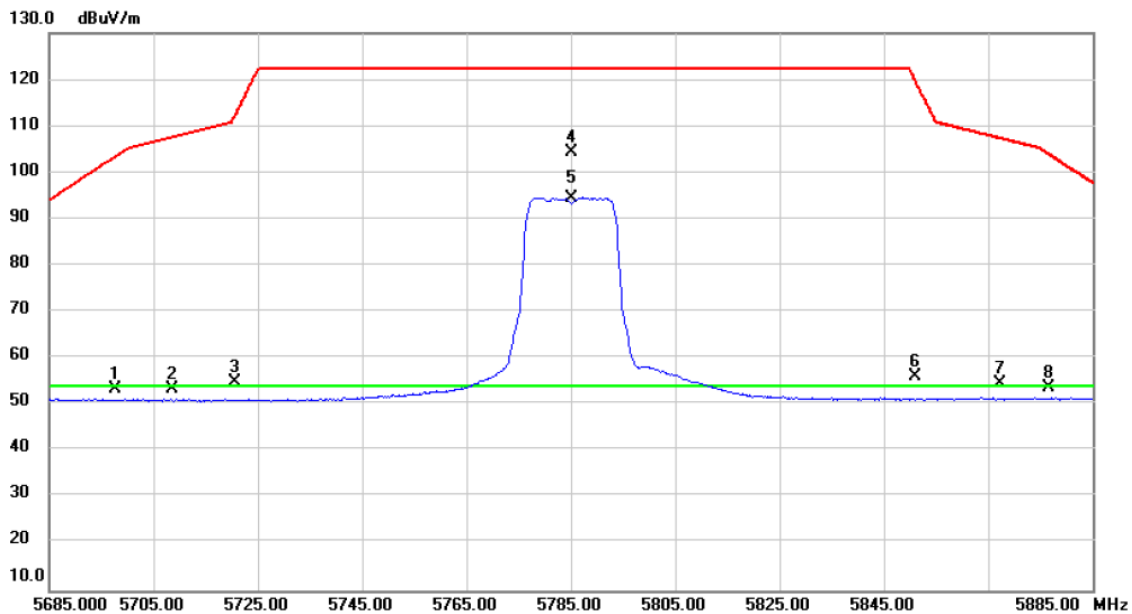


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5697.720	14.88	38.46	53.34	103.52	-50.18	peak	
2		5708.680	14.93	38.48	53.41	107.63	-54.22	peak	
3		5720.665	16.34	38.52	54.86	112.32	-57.46	peak	
4		5785.000	65.73	38.70	104.43	122.20	-17.77	peak	No Limit
5	*	5785.000	55.89	38.70	94.59	54.00	40.59	AVG	No Limit
6		5851.080	17.18	38.87	56.05	119.74	-63.69	peak	
7		5867.140	15.54	38.92	54.46	107.40	-52.94	peak	
8		5876.680	14.76	38.94	53.70	103.95	-50.25	peak	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

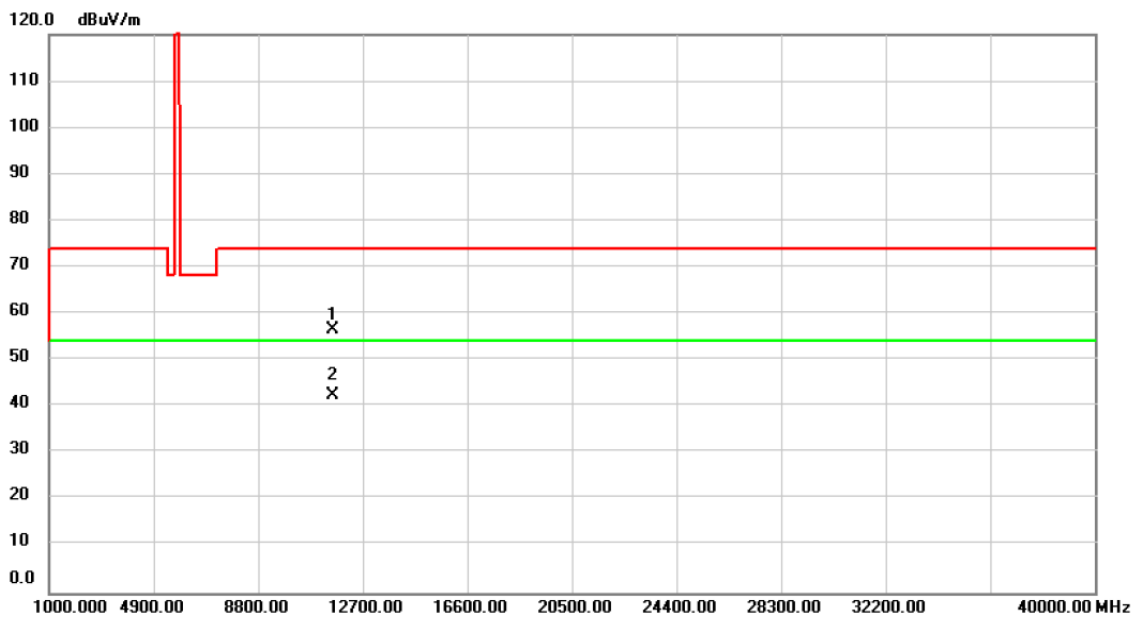


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.34	3.28	56.62	74.00	-17.38	peak	
2	*	11570.00	39.03	3.28	42.31	54.00	-11.69	AVG	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Vertical

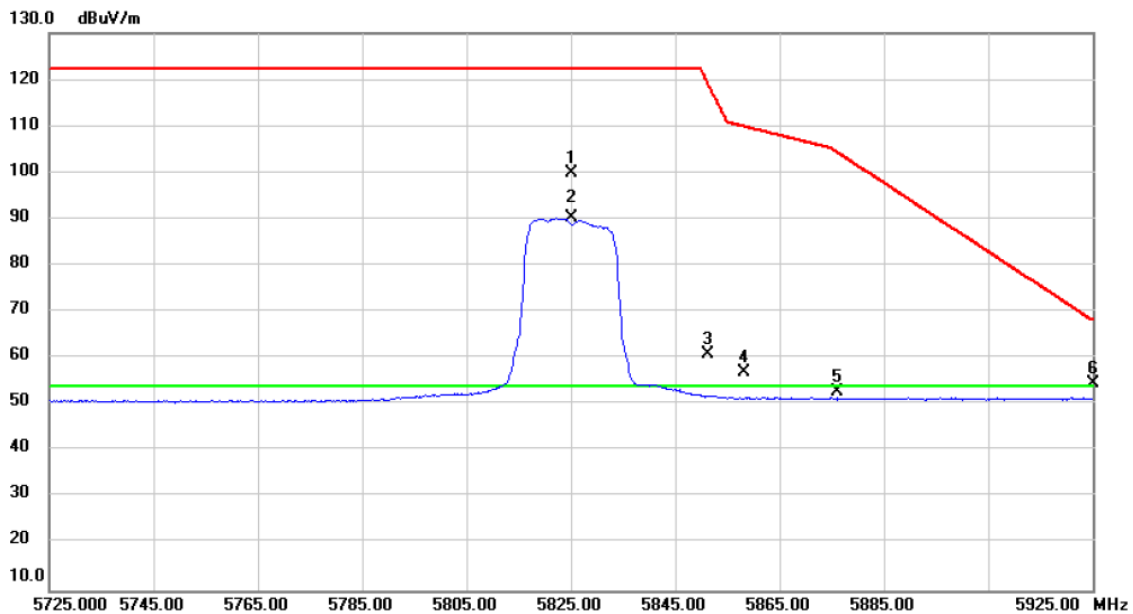

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5825.000	61.15	38.80	99.95	122.20	-22.25	peak	No Limit
2	*	5825.000	51.37	38.80	90.17	54.00	36.17	AVG	No Limit
3		5851.165	21.83	38.87	60.70	119.54	-58.84	peak	
4		5858.120	17.99	38.89	56.88	109.93	-53.05	peak	
5		5875.950	13.95	38.94	52.89	104.49	-51.60	peak	
6		5925.000	15.43	39.08	54.51	68.20	-13.69	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

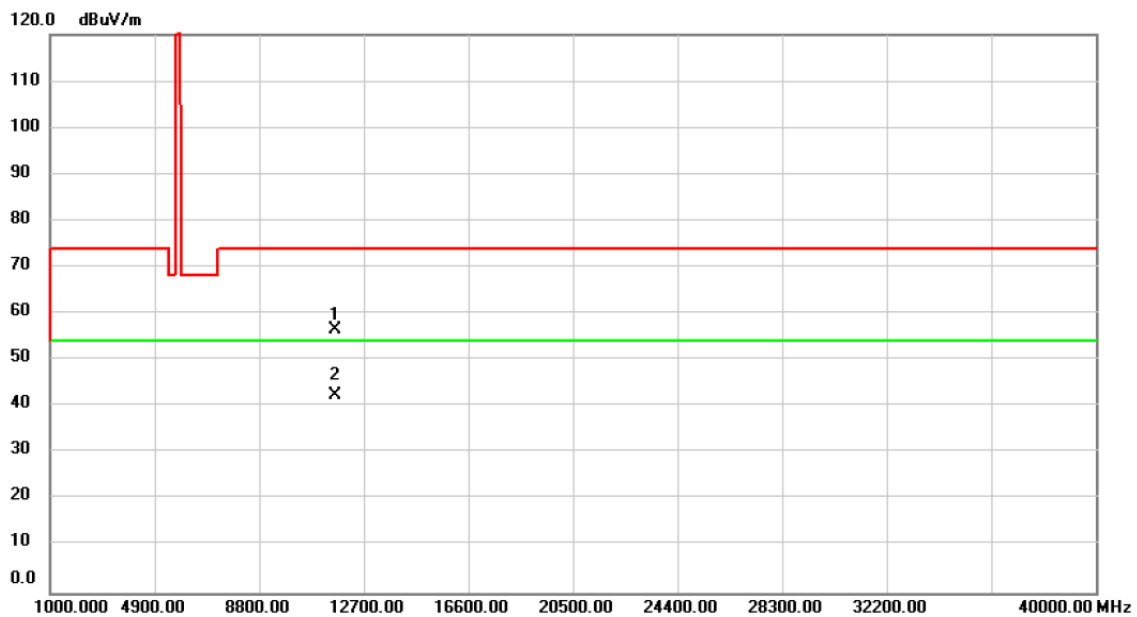
Polarization: Vertical

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.28	3.13	56.41	74.00	-17.59	peak	
2	*	11650.00	39.27	3.13	42.40	54.00	-11.60	AVG	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Horizontal

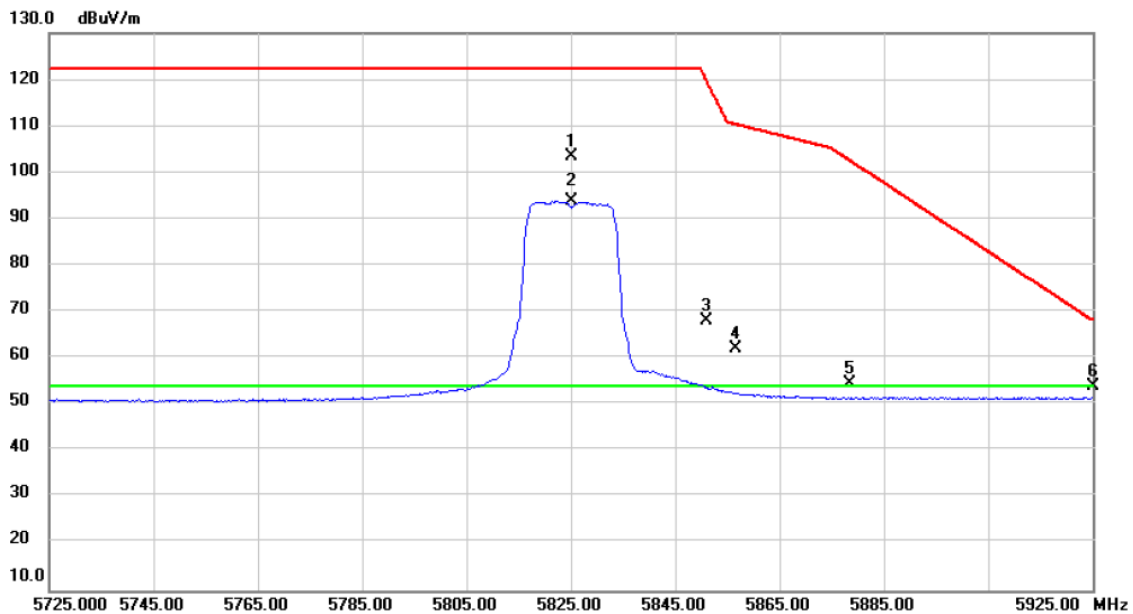

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5825.000	64.73	38.80	103.53	122.20	-18.67	peak	No Limit
2	*	5825.000	54.99	38.80	93.79	54.00	39.79	AVG	No Limit
3		5850.960	29.21	38.87	68.08	120.01	-51.93	peak	
4		5856.620	23.28	38.89	62.17	110.35	-48.18	peak	
5		5878.400	15.64	38.95	54.59	102.67	-48.08	peak	
6		5925.000	14.90	39.08	53.98	68.20	-14.22	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

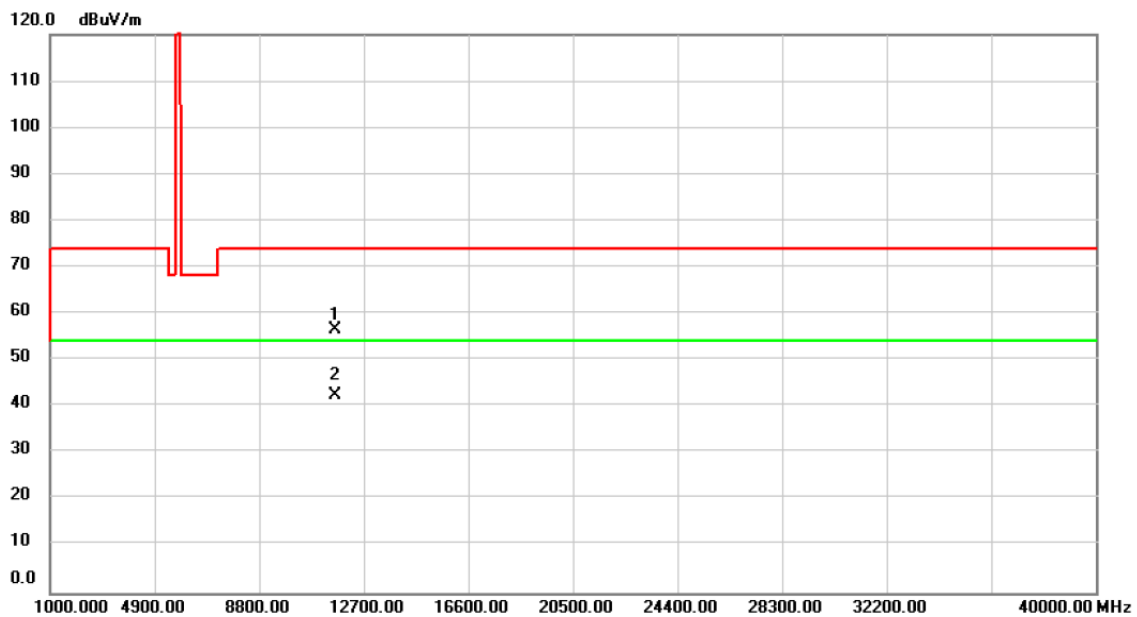Polarization: Horizontal

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.49	3.13	56.62	74.00	-17.38	peak	
2	*	11650.00	39.29	3.13	42.42	54.00	-11.58	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5745
MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%


Polarization: Vertical

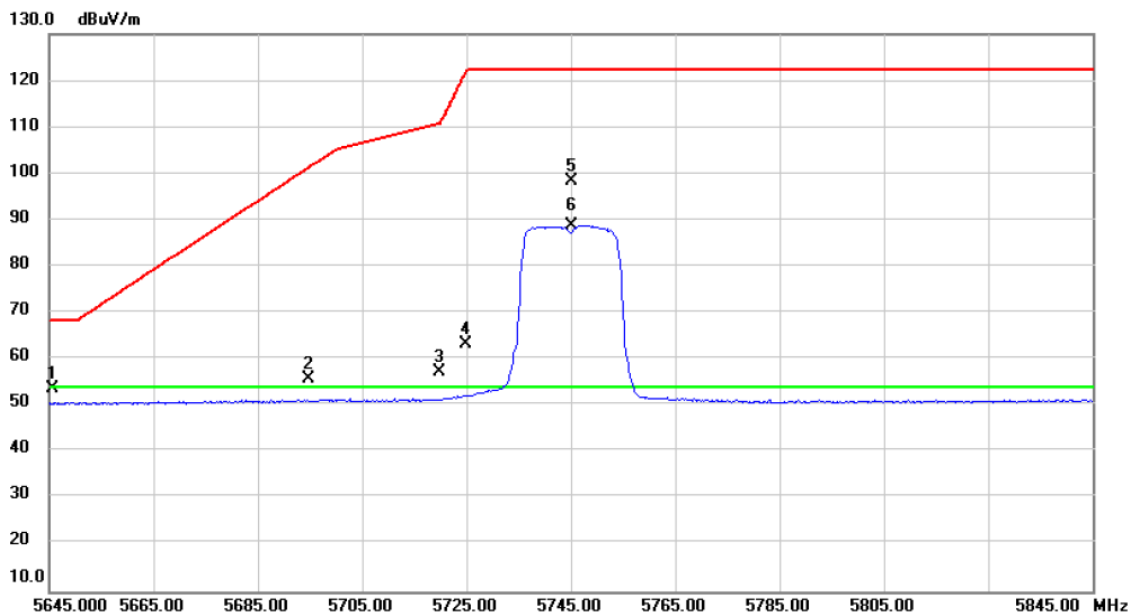

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5645.705	15.34	38.31	53.65	68.20	-14.55	peak	
2		5694.850	17.17	38.45	55.62	101.40	-45.78	peak	
3		5719.840	18.84	38.52	57.36	110.76	-53.40	peak	
4		5724.850	24.75	38.53	63.28	121.86	-58.58	peak	
5		5745.000	59.67	38.58	98.25	122.20	-23.95	peak	No Limit
6	*	5745.000	50.21	38.58	88.79	54.00	34.79	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5745 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Vertical

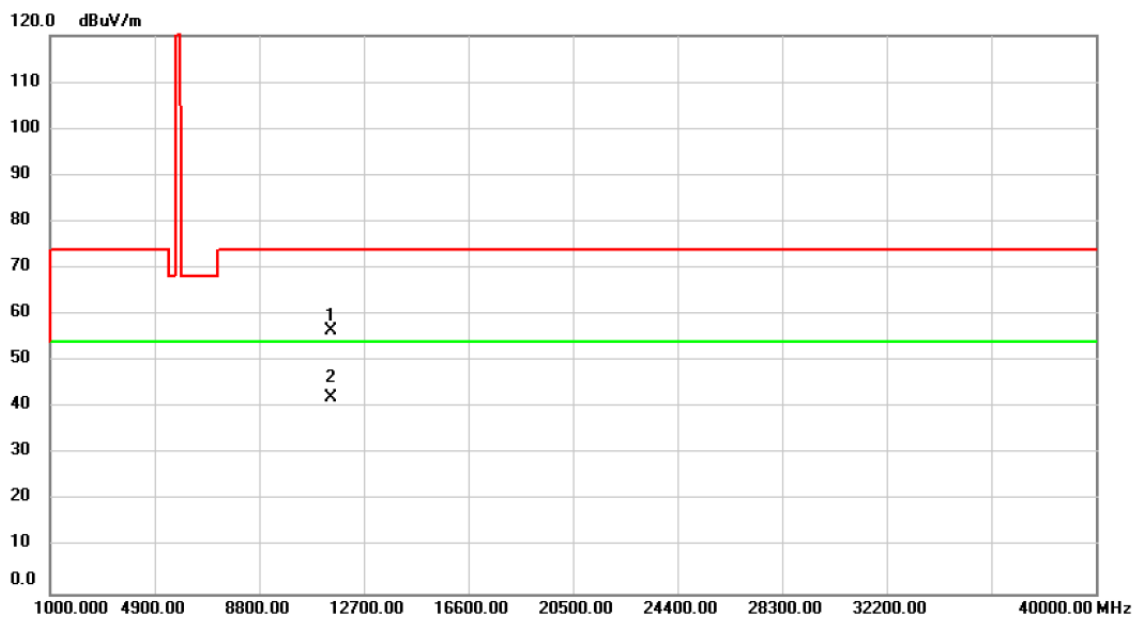

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	53.04	3.40	56.44	74.00	-17.56	peak	
2	*	11490.00	38.83	3.40	42.23	54.00	-11.77	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5745
MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%

Polarization: Horizontal

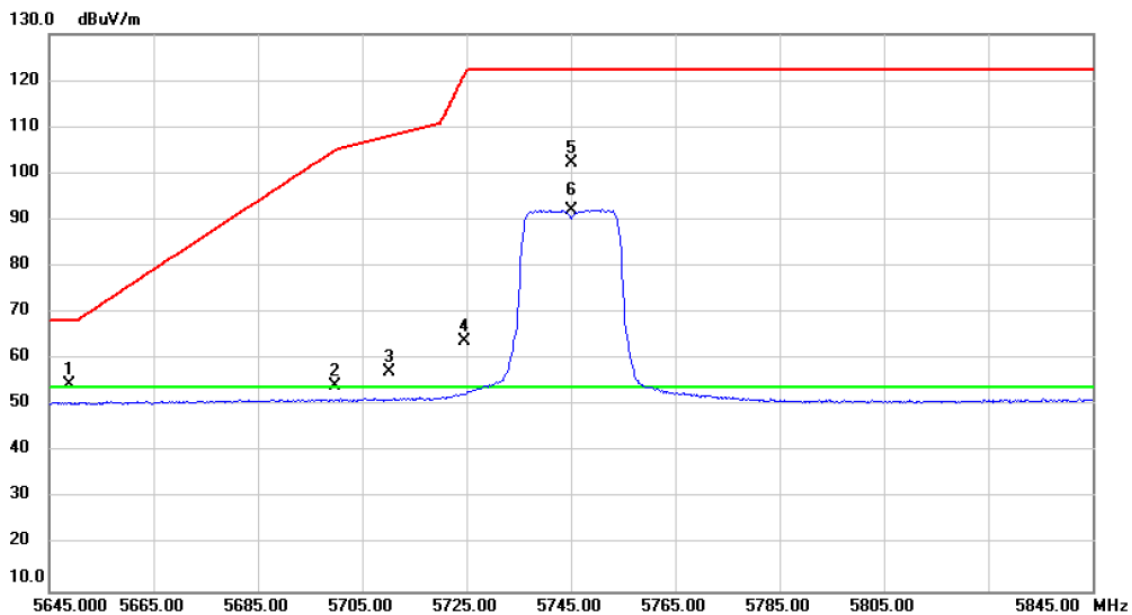


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5648.890	16.27	38.33	54.60	68.20	-13.60	peak	
2		5699.850	15.84	38.46	54.30	105.09	-50.79	peak	
3		5710.280	18.89	38.50	57.39	108.08	-50.69	peak	
4		5724.644	25.46	38.53	63.99	121.39	-57.40	peak	
5		5745.000	63.61	38.58	102.19	122.20	-20.01	peak	No Limit
6	*	5745.000	53.47	38.58	92.05	54.00	38.05	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

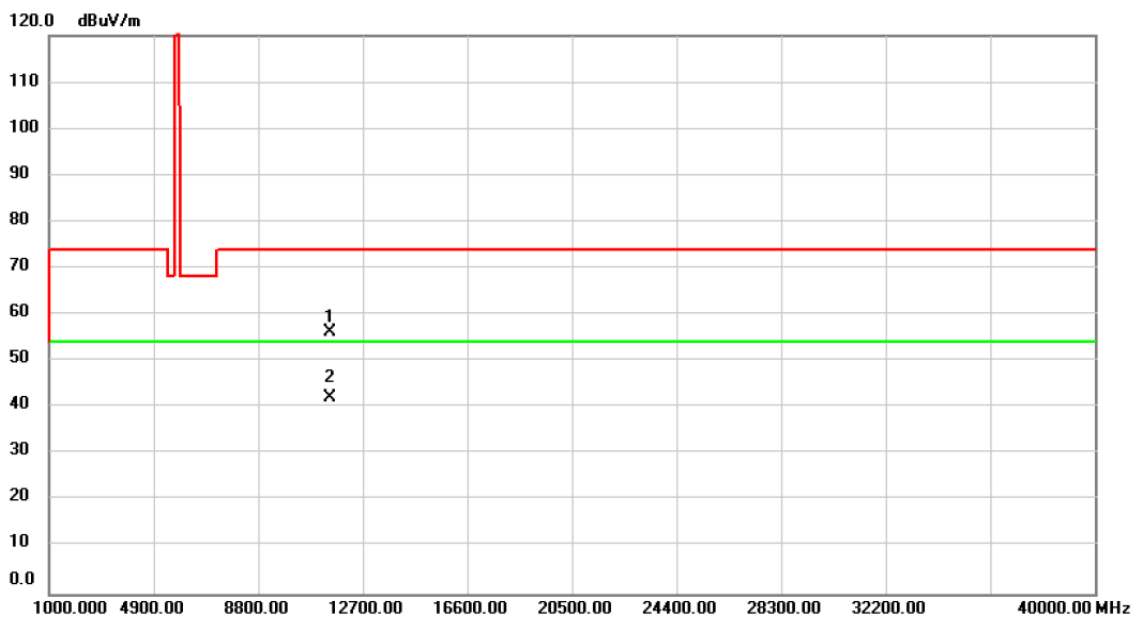

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	52.87	3.40	56.27	74.00	-17.73	peak	
2	*	11490.00	38.82	3.40	42.22	54.00	-11.78	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5785 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢測器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

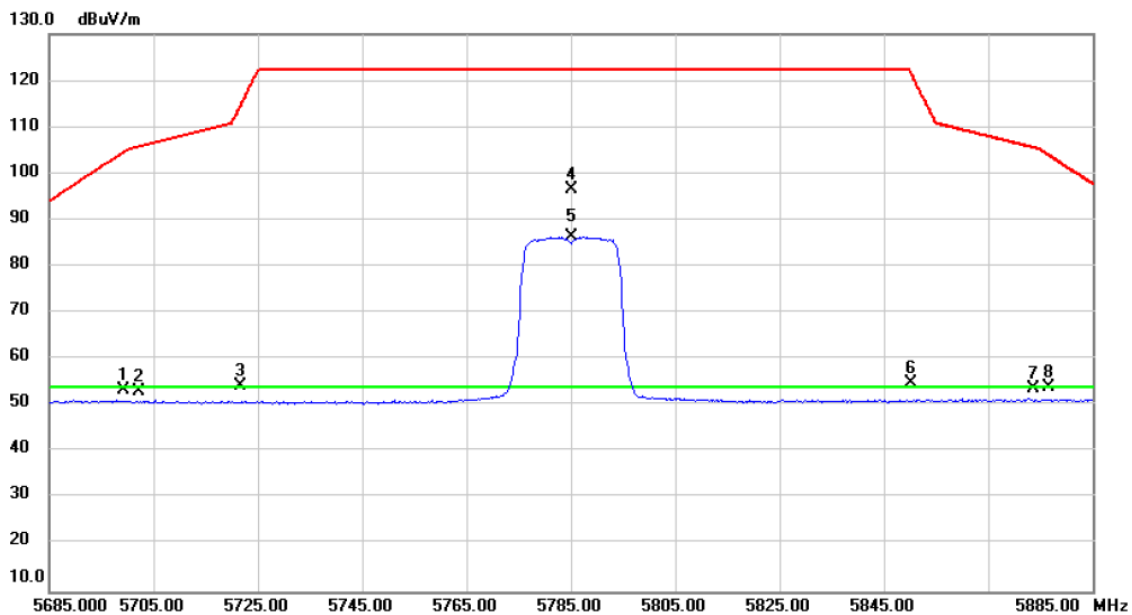

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5699.160	14.90	38.46	53.36	104.58	-51.22	peak	
2		5702.180	14.71	38.47	53.18	105.81	-52.63	peak	
3		5721.760	15.83	38.52	54.35	114.81	-60.46	peak	
4		5785.000	57.78	38.70	96.48	122.20	-25.72	peak	No Limit
5	*	5785.000	47.76	38.70	86.46	54.00	32.46	AVG	No Limit
6		5850.260	15.85	38.87	54.72	121.61	-66.89	peak	
7		5873.680	14.68	38.94	53.62	105.57	-51.95	peak	
8		5876.600	14.89	38.94	53.83	104.01	-50.18	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5785 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%

Polarization: Vertical

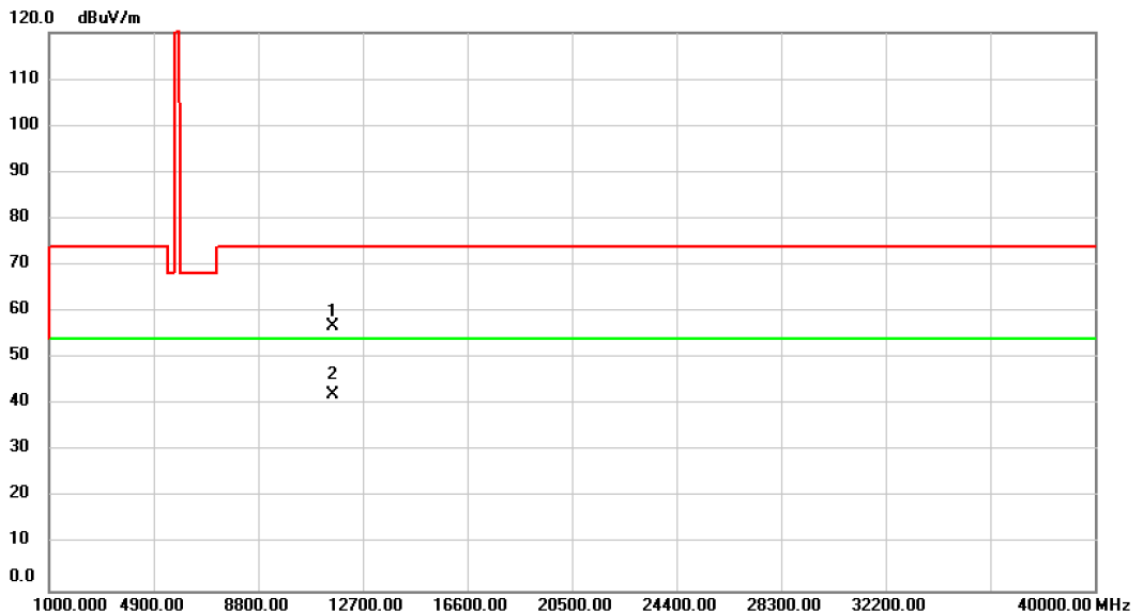

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.50	3.28	56.78	74.00	-17.22	peak	
2	*	11570.00	38.99	3.28	42.27	54.00	-11.73	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5785
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Horizontal

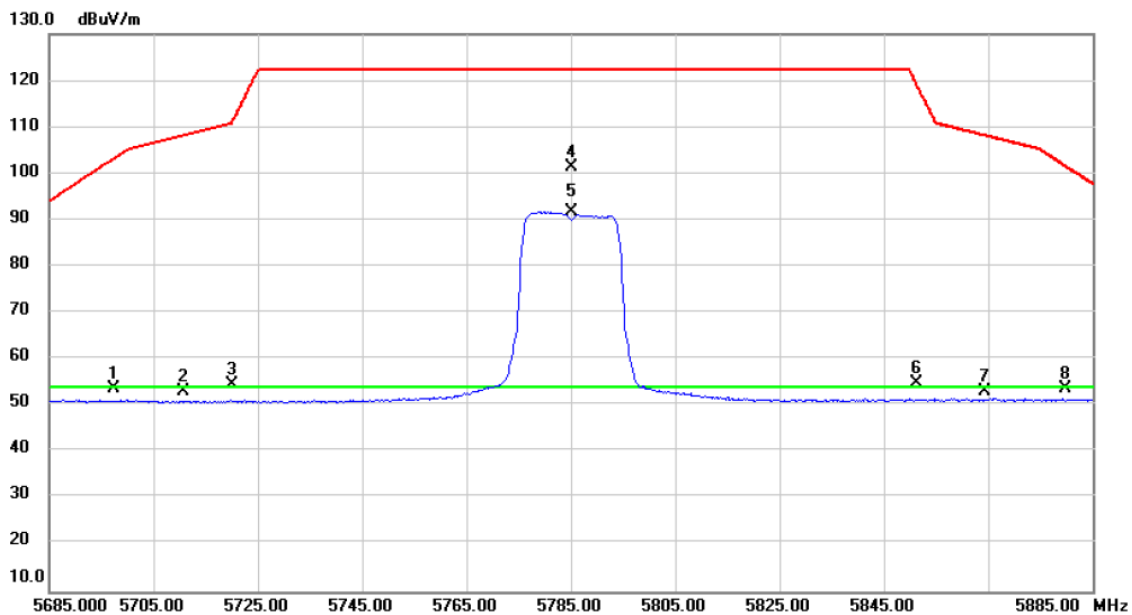

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5697.315	15.12	38.46	53.58	103.22	-49.64	peak	
2		5710.740	14.47	38.50	52.97	108.21	-55.24	peak	
3		5720.195	15.97	38.52	54.49	111.24	-56.75	peak	
4		5785.000	62.75	38.70	101.45	122.20	-20.75	peak	No Limit
5	*	5785.000	52.97	38.70	91.67	54.00	37.67	AVG	No Limit
6		5851.385	15.87	38.87	54.74	119.04	-64.30	peak	
7		5864.340	14.27	38.91	53.18	108.18	-55.00	peak	
8		5879.690	14.58	38.96	53.54	101.72	-48.18	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5785 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Horizontal

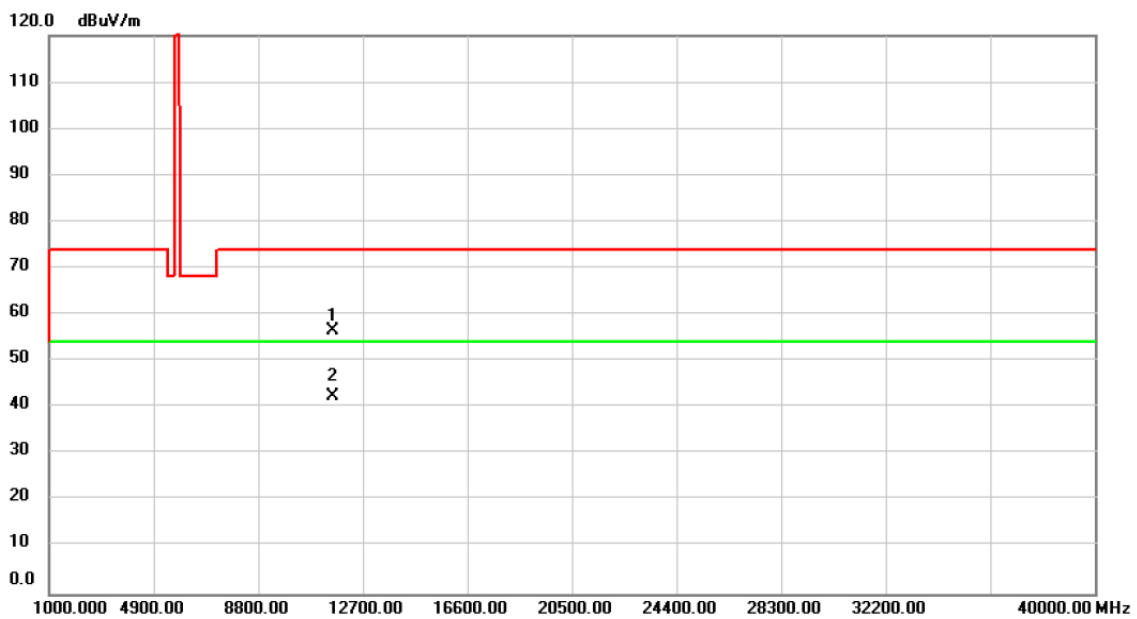

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.34	3.28	56.62	74.00	-17.38	peak	
2	*	11570.00	39.06	3.28	42.34	54.00	-11.66	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5825 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

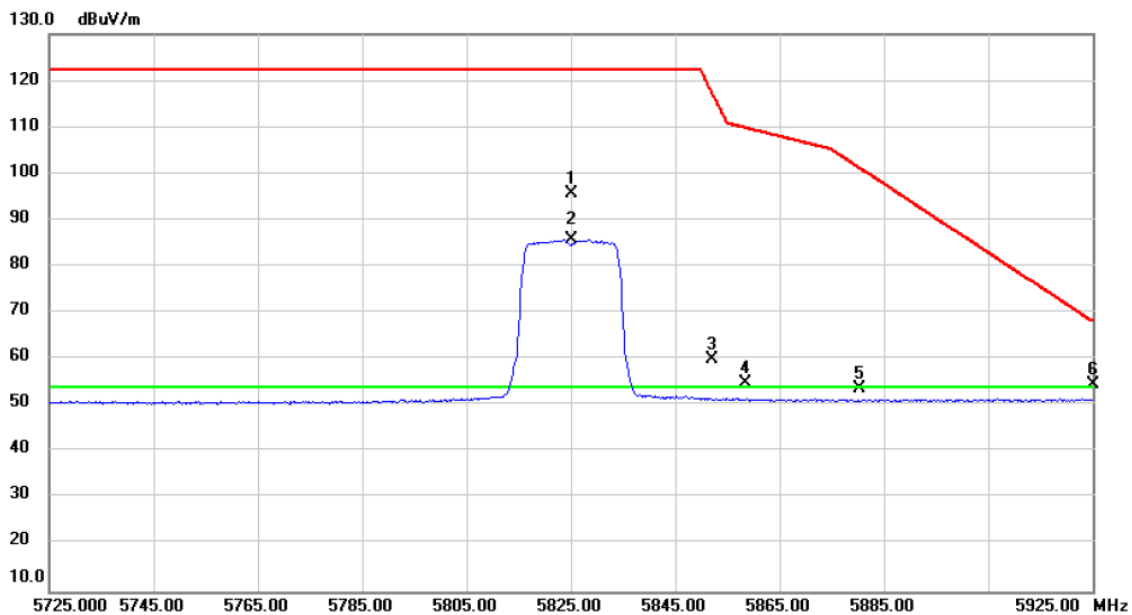

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5825.000	56.89	38.80	95.69	122.20	-26.51	peak	No Limit
2	*	5825.000	47.08	38.80	85.88	54.00	31.88	AVG	No Limit
3		5852.130	21.20	38.87	60.07	117.34	-57.27	peak	
4		5858.480	15.86	38.89	54.75	109.82	-55.07	peak	
5		5880.250	14.70	38.96	53.66	101.30	-47.64	peak	
6		5925.000	15.45	39.08	54.53	68.20	-13.67	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5825 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%


Polarization: Vertical

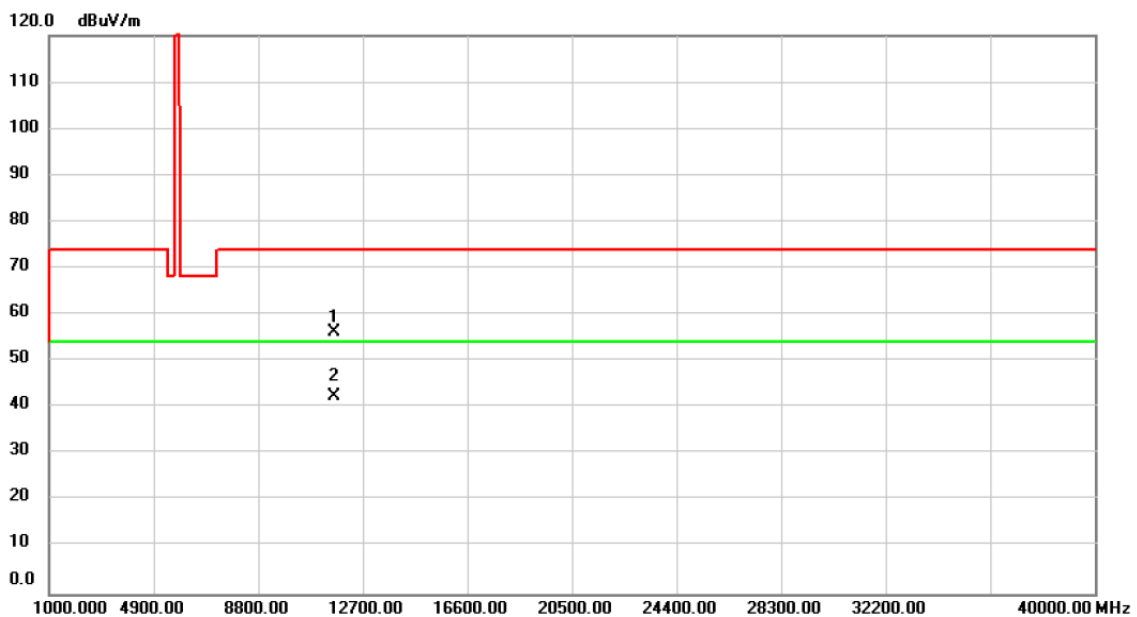

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.21	3.13	56.34	74.00	-17.66	peak	
2	*	11650.00	39.21	3.13	42.34	54.00	-11.66	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5825 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Horizontal

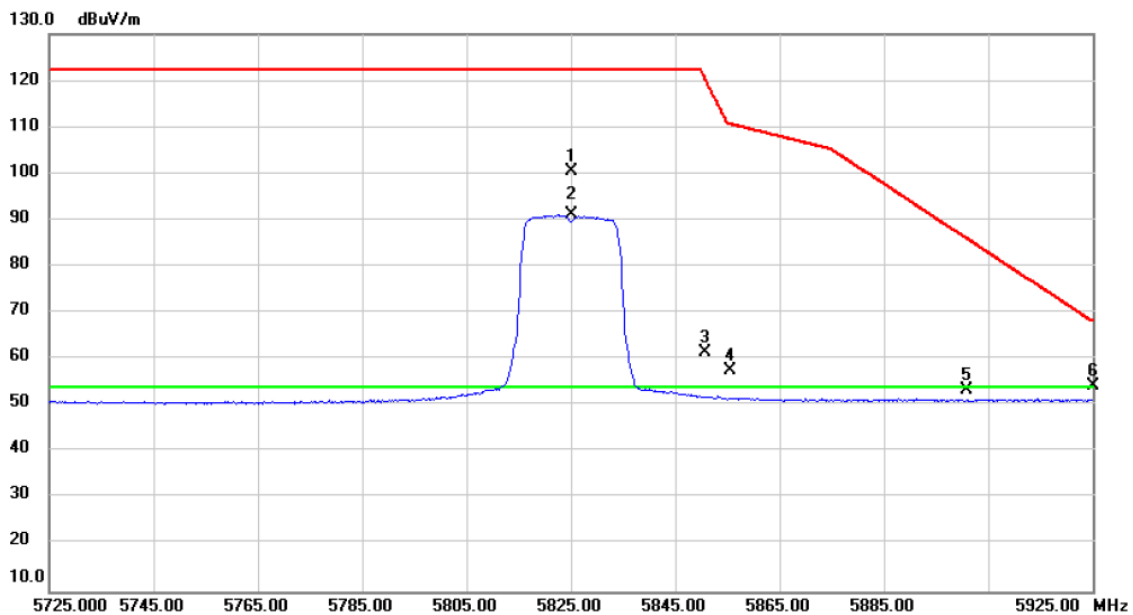


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5825.000	61.63	38.80	100.43	122.20	-21.77	peak	No Limit
2	*	5825.000	52.26	38.80	91.06	54.00	37.06	AVG	No Limit
3		5850.835	22.67	38.87	61.54	120.30	-58.76	peak	
4		5855.660	18.61	38.89	57.50	110.61	-53.11	peak	
5		5900.900	14.24	39.01	53.25	85.99	-32.74	peak	
6		5925.000	15.15	39.08	54.23	68.20	-13.97	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

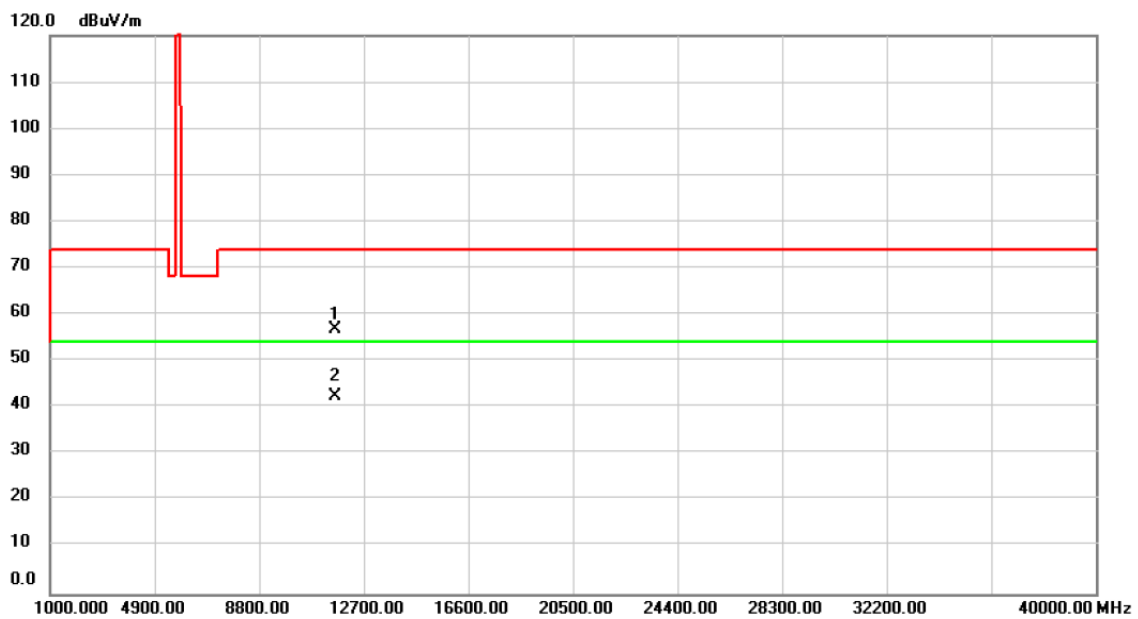

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.61	3.13	56.74	74.00	-17.26	peak	
2	*	11650.00	39.24	3.13	42.37	54.00	-11.63	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5755
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢測器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

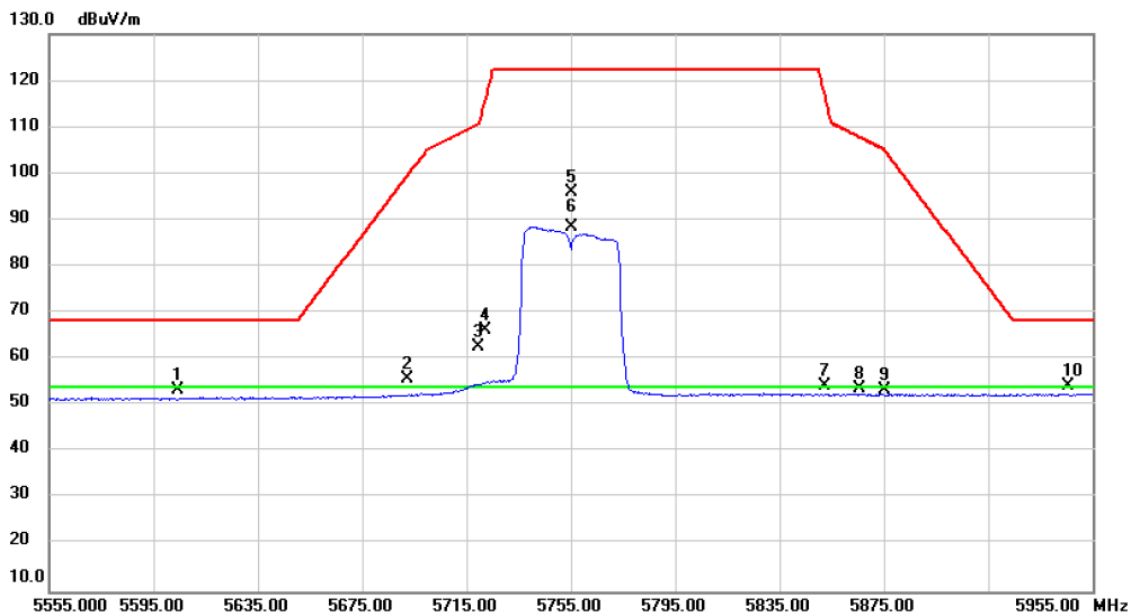

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5604.210	15.07	38.21	53.28	68.20	-14.92	peak	
2		5692.300	17.36	38.45	55.81	99.52	-43.71	peak	
3		5719.460	24.10	38.52	62.62	110.65	-48.03	peak	
4		5722.335	27.71	38.53	66.24	116.13	-49.89	peak	
5		5755.000	57.45	38.62	96.07	122.20	-26.13	peak	No Limit
6	*	5755.000	49.81	38.62	88.43	54.00	34.43	AVG	No Limit
7		5852.590	15.29	38.87	54.16	116.29	-62.13	peak	
8		5865.640	14.78	38.92	53.70	107.82	-54.12	peak	
9		5875.300	14.46	38.94	53.40	104.98	-51.58	peak	
10		5945.670	15.18	39.13	54.31	68.20	-13.89	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Vertical

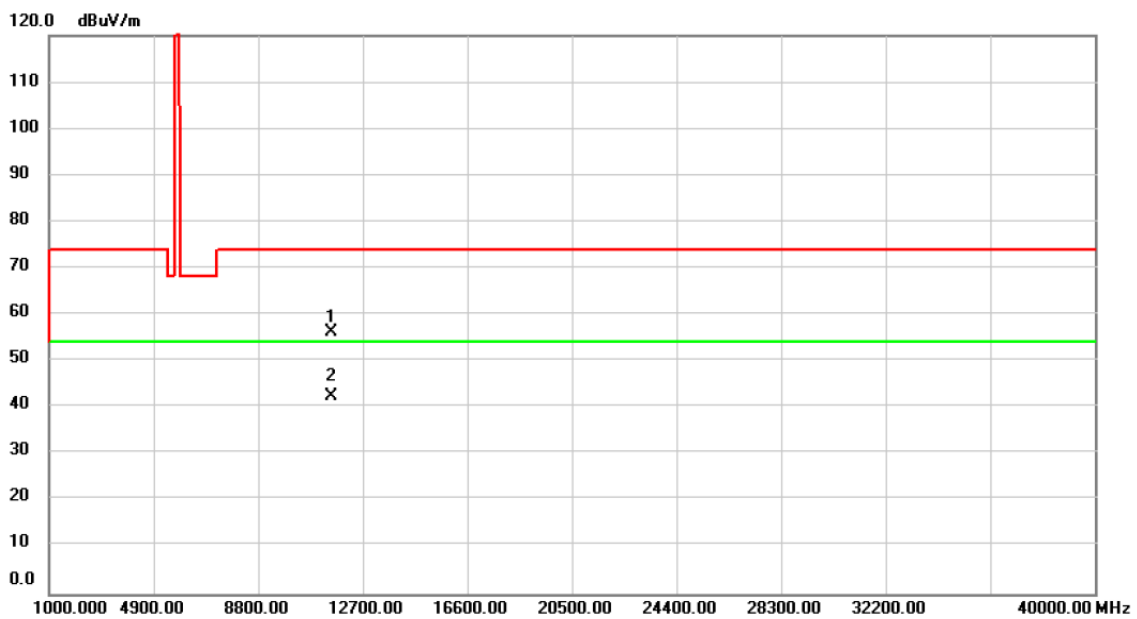

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	52.80	3.40	56.20	74.00	-17.80	peak	
2	*	11510.00	39.03	3.40	42.43	54.00	-11.57	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5755
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Horizontal

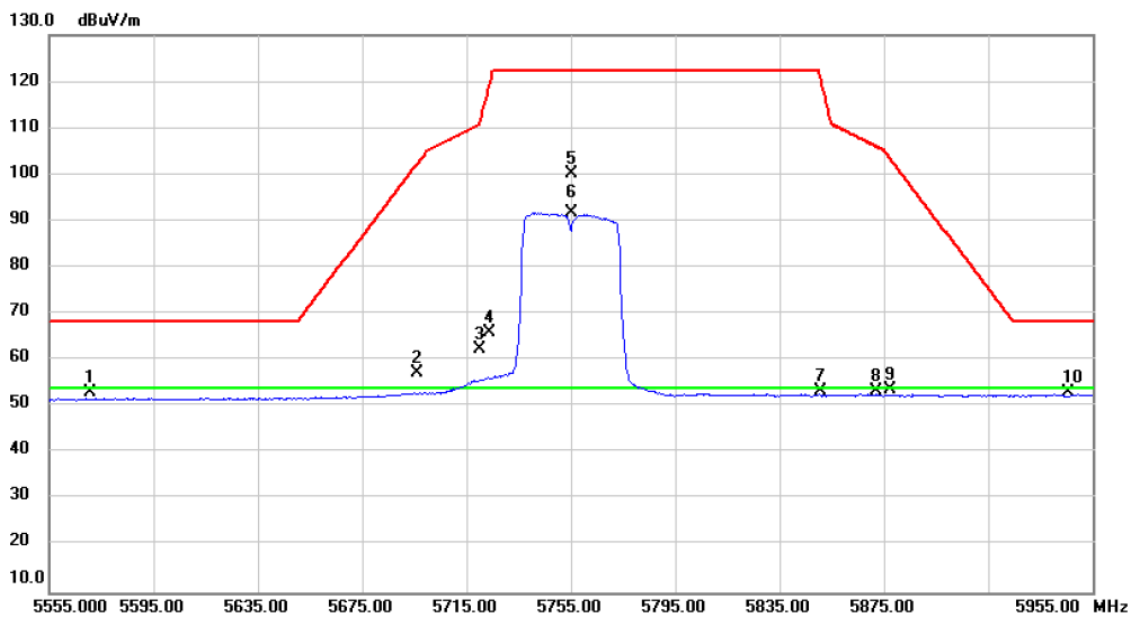

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5570.960	14.95	38.11	53.06	68.20	-15.14	peak	
2	5696.000	18.89	38.45	57.34	102.25	-44.91	peak	
3	5720.000	23.75	38.52	62.27	110.80	-48.53	peak	
4	5724.045	27.33	38.53	65.86	120.02	-54.16	peak	
5	5755.000	61.47	38.62	100.09	122.20	-22.11	peak	No Limit
6 *	5755.000	53.03	38.62	91.65	54.00	37.65	AVG	No Limit
7	5850.525	14.37	38.87	53.24	121.00	-67.76	peak	
8	5872.200	14.48	38.94	53.42	105.98	-52.56	peak	
9	5877.200	14.80	38.94	53.74	103.57	-49.83	peak	
10	5945.820	13.91	39.13	53.04	68.20	-15.16	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Horizontal

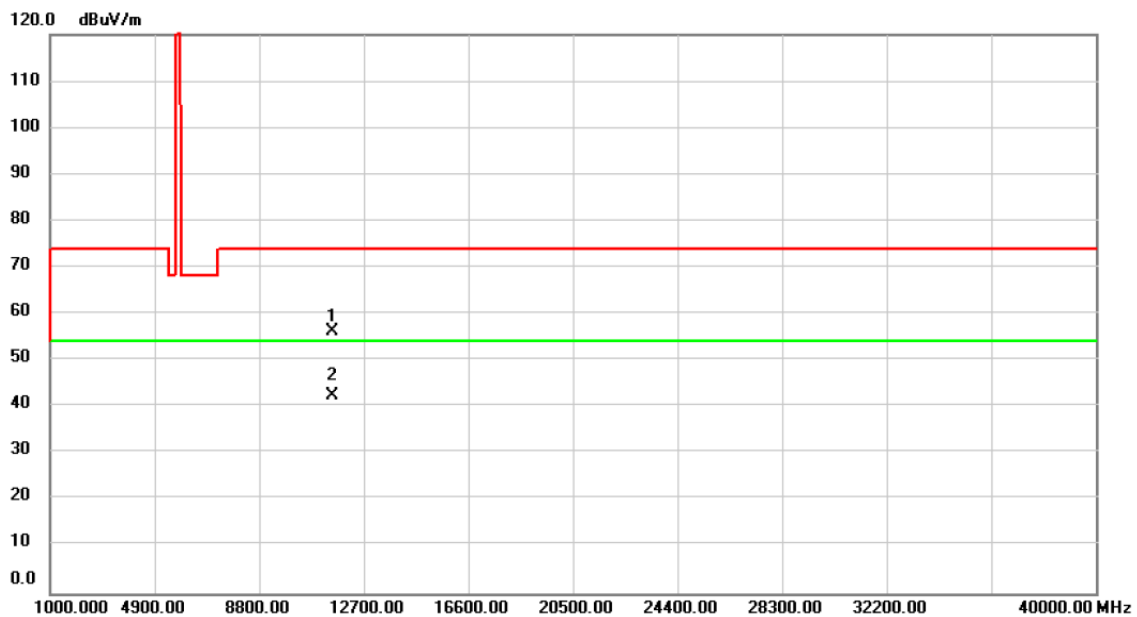

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	52.94	3.40	56.34	74.00	-17.66	peak	
2	*	11510.00	39.10	3.40	42.50	54.00	-11.50	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5795 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

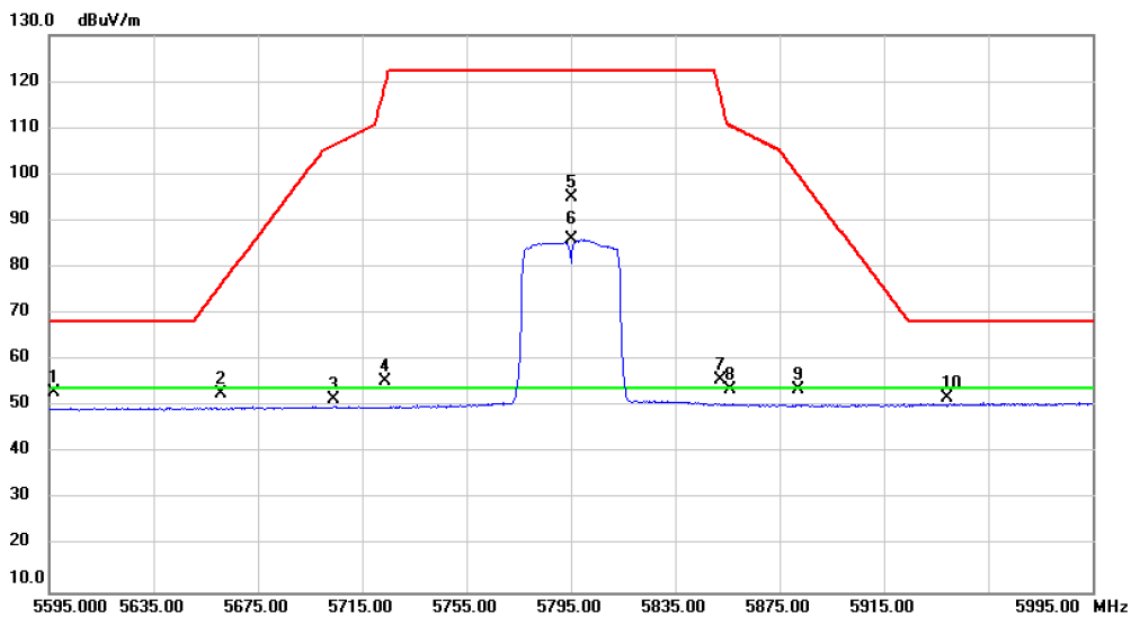

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5596.650	14.90	38.18	53.08	68.20	-15.12	peak	
2	5661.050	14.31	38.36	52.67	76.41	-23.74	peak	
3	5704.100	13.00	38.48	51.48	106.35	-54.87	peak	
4	5723.730	17.03	38.53	55.56	119.31	-63.75	peak	
5	5795.000	56.39	38.72	95.11	122.20	-27.09	peak	No Limit
6 *	5795.000	47.23	38.72	85.95	54.00	31.95	AVG	No Limit
7	5852.335	16.98	38.87	55.85	116.87	-61.02	peak	
8	5856.160	14.67	38.89	53.56	110.47	-56.91	peak	
9	5882.250	14.81	38.96	53.77	99.82	-46.05	peak	
10	5939.040	12.88	39.11	51.99	68.20	-16.21	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5795
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

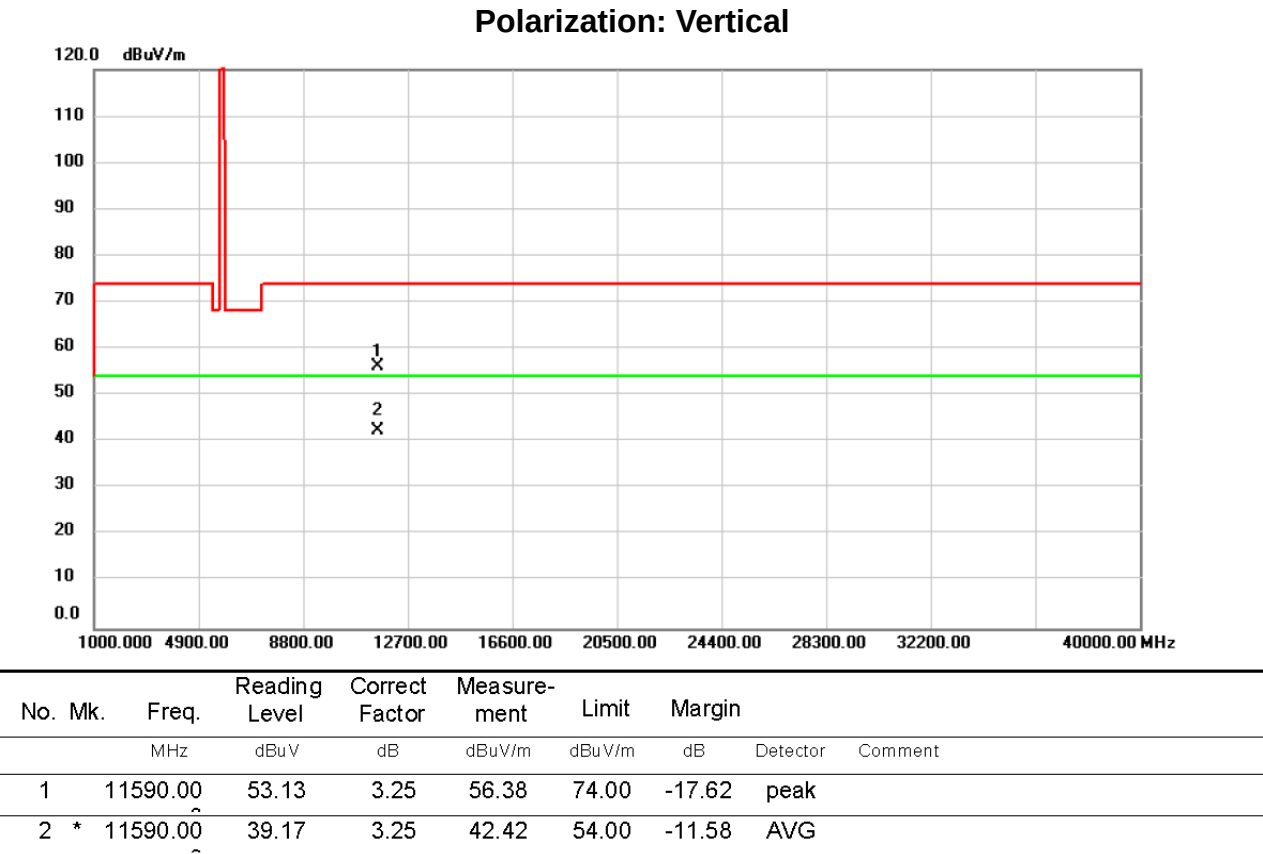

測試頻道: IEEE 802.11ac (VHT40) / 5795 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Horizontal

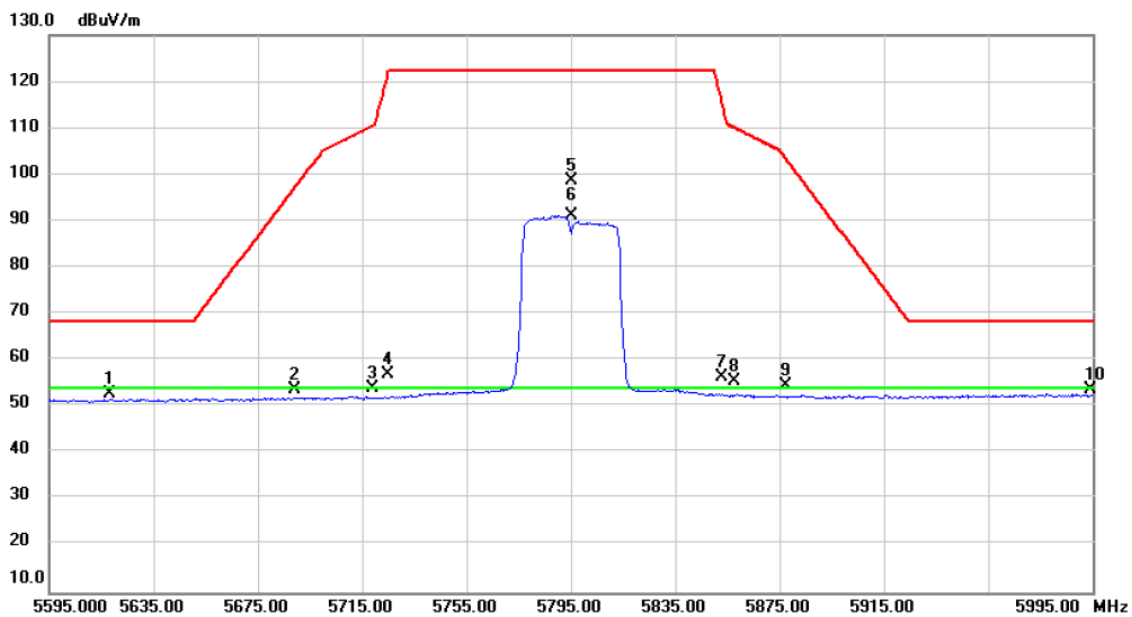


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5618.320	14.51	38.24	52.75	68.20	-15.45	peak	
2	5688.950	15.31	38.43	53.74	97.05	-43.31	peak	
3	5719.060	15.44	38.52	53.96	110.54	-56.58	peak	
4	5724.880	18.49	38.53	57.02	121.93	-64.91	peak	
5	5795.000	59.97	38.72	98.69	122.20	-23.51	peak	No Limit
6 *	5795.000	52.45	38.72	91.17	54.00	37.17	AVG	No Limit
7	5852.785	17.61	38.88	56.49	115.85	-59.36	peak	
8	5857.820	16.65	38.89	55.54	110.01	-54.47	peak	
9	5877.250	15.52	38.94	54.46	103.53	-49.07	peak	
10	5994.160	14.29	39.26	53.55	68.20	-14.65	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5795 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

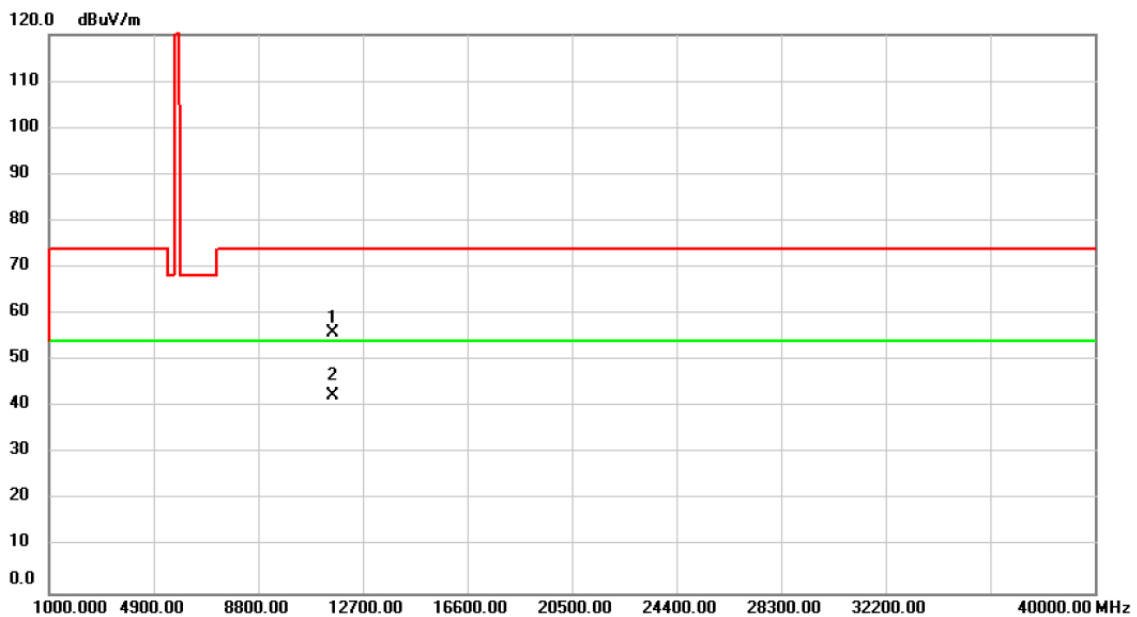

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	52.77	3.25	56.02	74.00	-17.98	peak	
2	*	11590.00	39.13	3.25	42.38	54.00	-11.62	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5775 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C


環境濕度: 70%

Polarization: Vertical

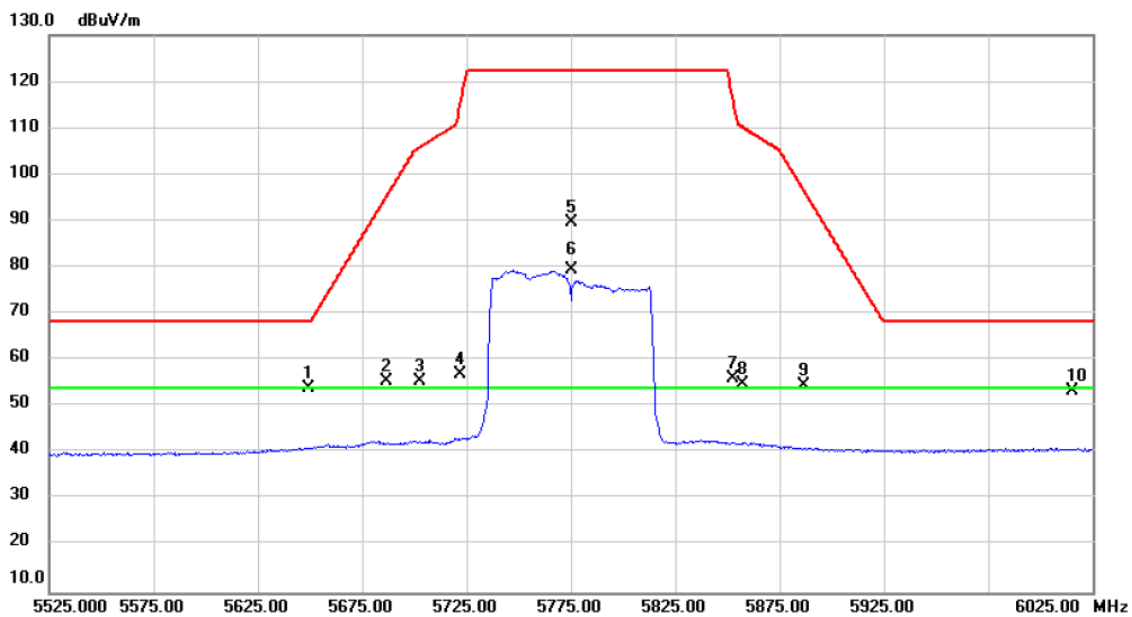

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5649.625	15.77	38.33	54.10	68.20	-14.10	peak	
2	5686.900	17.09	38.43	55.52	95.54	-40.02	peak	
3	5702.580	16.84	38.47	55.31	105.92	-50.61	peak	
4	5722.105	18.40	38.53	56.93	115.60	-58.67	peak	
5	5775.000	50.89	38.67	89.56	122.20	-32.64	peak	No Limit
6 *	5775.000	40.67	38.67	79.34	54.00	25.34	AVG	No Limit
7	5852.695	17.09	38.88	55.97	116.05	-60.08	peak	
8	5857.640	15.98	38.89	54.87	110.06	-55.19	peak	
9	5886.650	15.64	38.97	54.61	96.55	-41.94	peak	
10	6015.000	13.91	39.33	53.24	68.20	-14.96	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5775 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

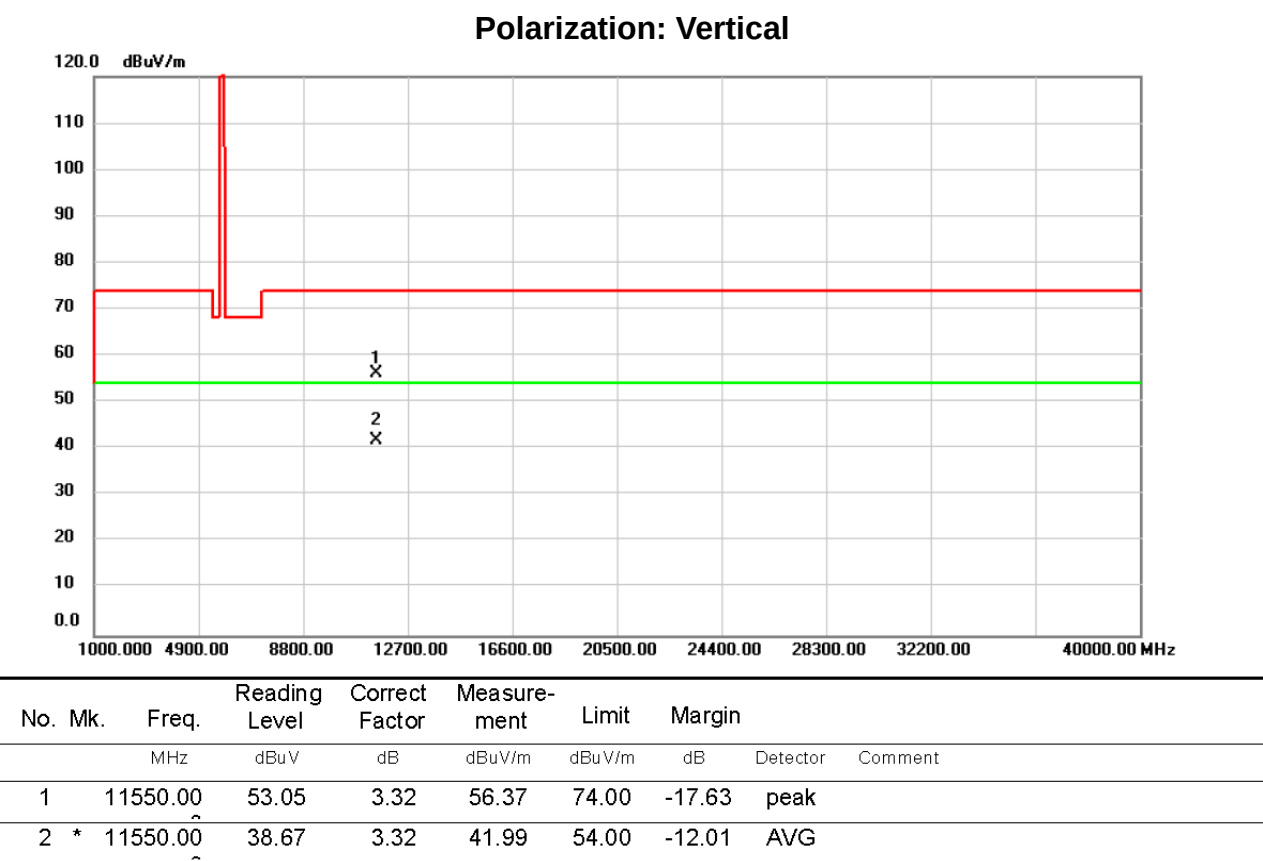

測試頻道: IEEE 802.11ac (VHT80) / 5775 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Horizontal

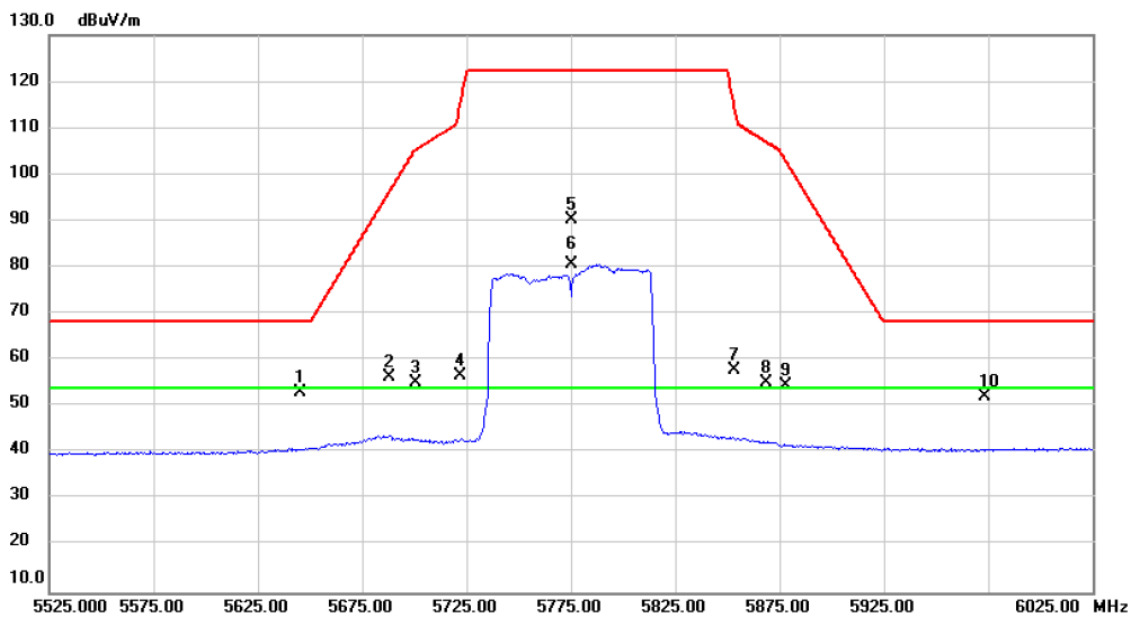


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5645.000	14.81	38.31	53.12	68.20	-15.08	peak	
2	5687.700	17.95	38.43	56.38	96.13	-39.75	peak	
3	5700.860	16.62	38.46	55.08	105.44	-50.36	peak	
4	5721.895	18.15	38.53	56.68	115.12	-58.44	peak	
5	5775.000	51.50	38.67	90.17	122.20	-32.03	peak	No Limit
6 *	5775.000	41.88	38.67	80.55	54.00	26.55	AVG	No Limit
7	5853.215	19.09	38.89	57.98	114.87	-56.89	peak	
8	5868.900	16.17	38.92	55.09	106.91	-51.82	peak	
9	5877.700	15.53	38.94	54.47	103.19	-48.72	peak	
10	5973.300	12.89	39.21	52.10	68.20	-16.10	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5775 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

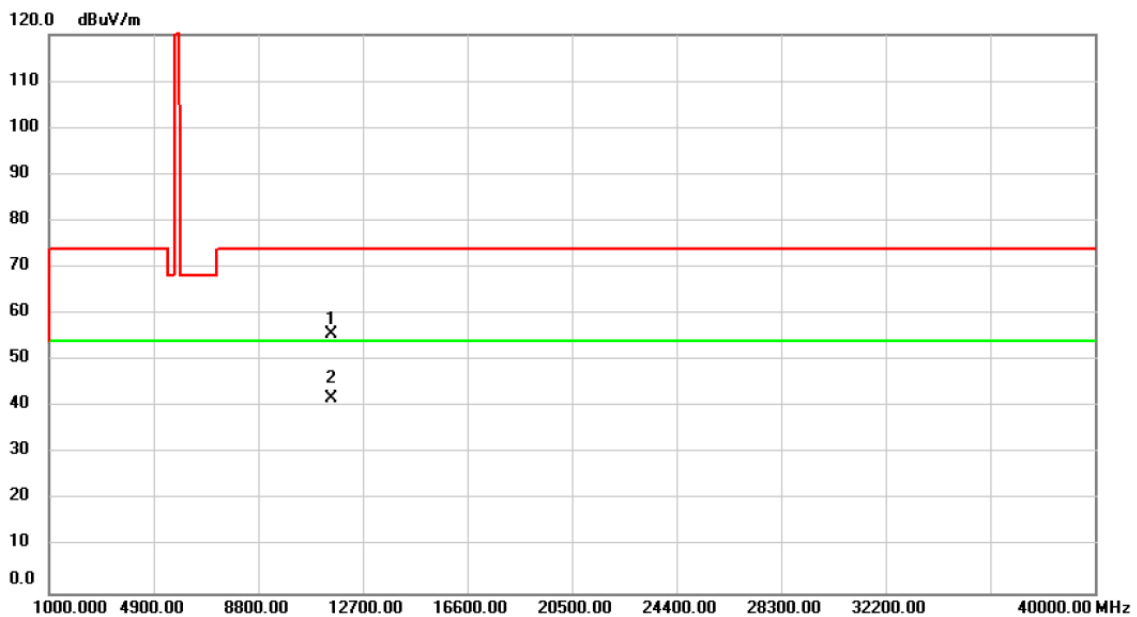

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	52.28	3.32	55.60	74.00	-18.40	peak	
2	*	11550.00	38.64	3.32	41.96	54.00	-12.04	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz 測試模式: RX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 108/03/08
 環境溫度: 23°C 環境濕度: 70%

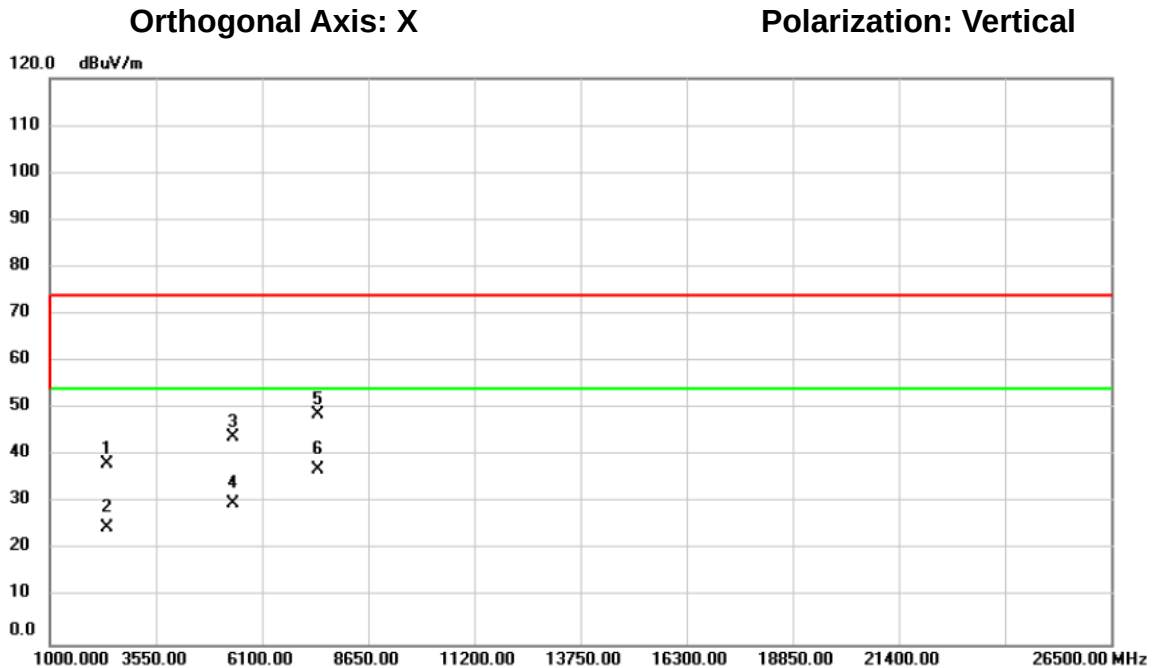


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2377.000	55.43	-17.26	38.17	74.00	-35.83	peak	
2		2377.000	41.99	-17.26	24.73	54.00	-29.27	AVG	
3		5386.000	54.89	-11.00	43.89	74.00	-30.11	peak	
4		5386.000	40.87	-11.00	29.87	54.00	-24.13	AVG	
5		7451.500	53.10	-4.38	48.72	74.00	-25.28	peak	
6	*	7451.500	41.35	-4.38	36.97	54.00	-17.03	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5210
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C

測試模式: RX_Adapter
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 108/03/08
 環境濕度: 70%


Orthogonal Axis: X

Polarization: Horizontal

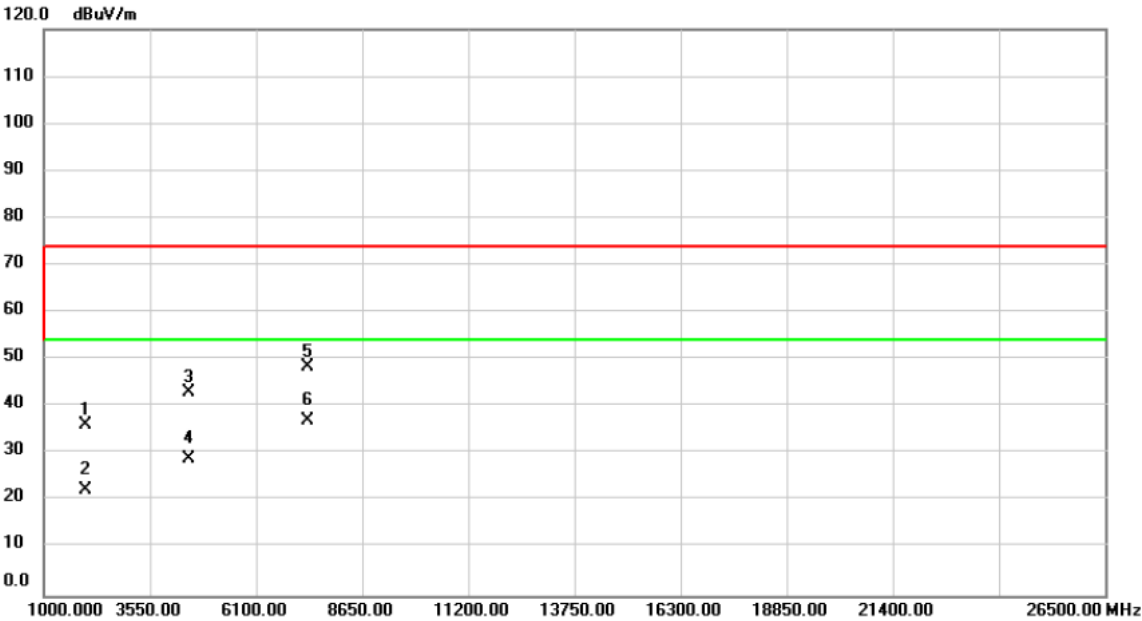

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1994.500	54.99	-18.74	36.25	74.00	-37.75	peak	
2		1994.500	41.06	-18.74	22.32	54.00	-31.68	AVG	
3		4468.000	54.93	-11.98	42.95	74.00	-31.05	peak	
4		4468.000	40.98	-11.98	29.00	54.00	-25.00	AVG	
5		7349.500	53.22	-4.72	48.50	74.00	-25.50	peak	
6	*	7349.500	41.69	-4.72	36.97	54.00	-17.03	AVG	


測試頻道: IEEE 802.11a / 5320 MHz	測試模式: RX_Adapter
解析頻寬: 100 kHz	視頻頻寬: 100 kHz
量測天線: Log-Bicon Antenna	測試距離: 3 米
檢測器: Quasi-Peak/Peak	測試日期: 108/03/08
環境溫度: 23°C	環境濕度: 70%

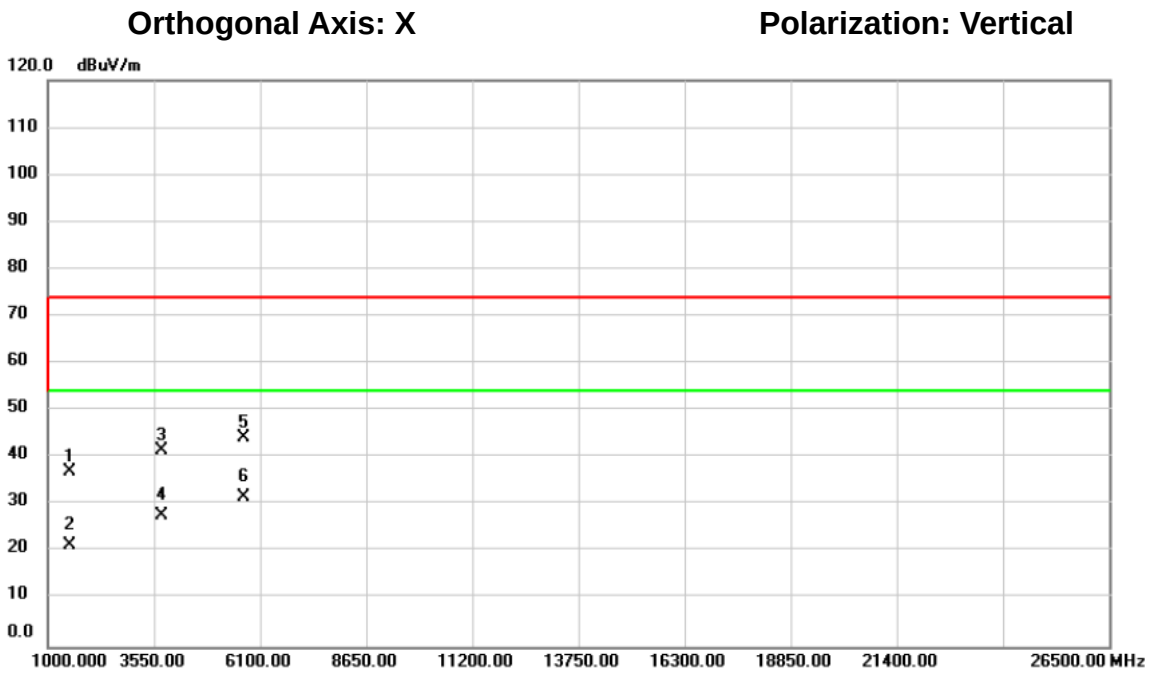

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1510.000	56.91	-19.99	36.92	74.00	-37.08	peak	
2		1510.000	41.58	-19.99	21.59	54.00	-32.41	AVG	
3		3728.500	55.53	-14.07	41.46	74.00	-32.54	peak	
4		3728.500	41.69	-14.07	27.62	54.00	-26.38	AVG	
5		5717.500	54.59	-10.38	44.21	74.00	-29.79	peak	
6	*	5717.500	42.01	-10.38	31.63	54.00	-22.37	AVG	


測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C

測試模式: RX_Adapter
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 108/03/08
 環境濕度: 70%

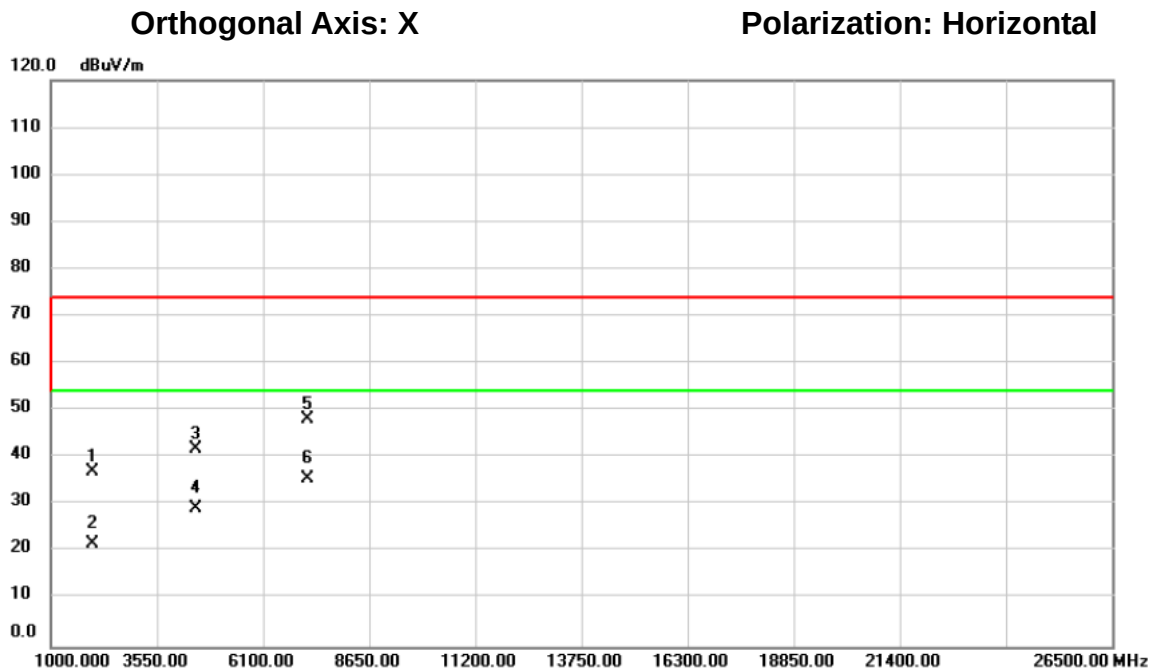

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1994.500	55.90	-18.74	37.16	74.00	-36.84	peak	
2		1994.500	40.54	-18.74	21.80	54.00	-32.20	AVG	
3		4468.000	53.91	-11.98	41.93	74.00	-32.07	peak	
4		4468.000	41.13	-11.98	29.15	54.00	-24.85	AVG	
5		7171.000	53.39	-5.33	48.06	74.00	-25.94	peak	
6	*	7171.000	40.79	-5.33	35.46	54.00	-18.54	AVG	


測試頻道: IEEE 802.11a / 5700 MHz	測試模式: RX_Adapter
解析頻寬: 100 kHz	視頻頻寬: 100 kHz
量測天線: Log-Bicon Antenna	測試距離: 3 米
檢測器: Quasi-Peak/Peak	測試日期: 108/03/08
環境溫度: 23°C	環境濕度: 70%

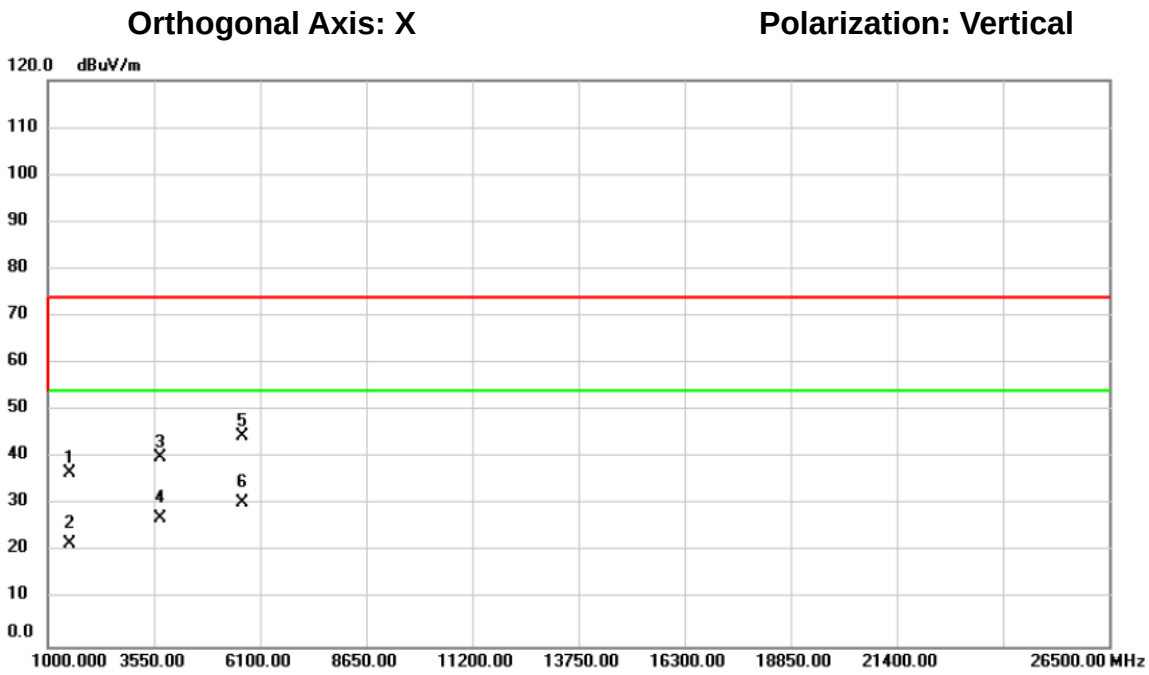

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1510.000	56.67	-19.99	36.68	74.00	-37.32	peak	
2		1510.000	41.59	-19.99	21.60	54.00	-32.40	AVG	
3		3703.000	54.08	-14.15	39.93	74.00	-34.07	peak	
4		3703.000	41.39	-14.15	27.24	54.00	-26.76	AVG	
5		5666.500	55.13	-10.50	44.63	74.00	-29.37	peak	
6	*	5666.500	40.98	-10.50	30.48	54.00	-23.52	AVG	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 100 kHz
量測天線: Log-Bicon Antenna
檢測器: Quasi-Peak/Peak
環境溫度: 23°C

測試模式: RX_Adapter
視頻頻寬: 100 kHz
測試距離: 3 米
測試日期: 108/03/08
環境濕度: 70%

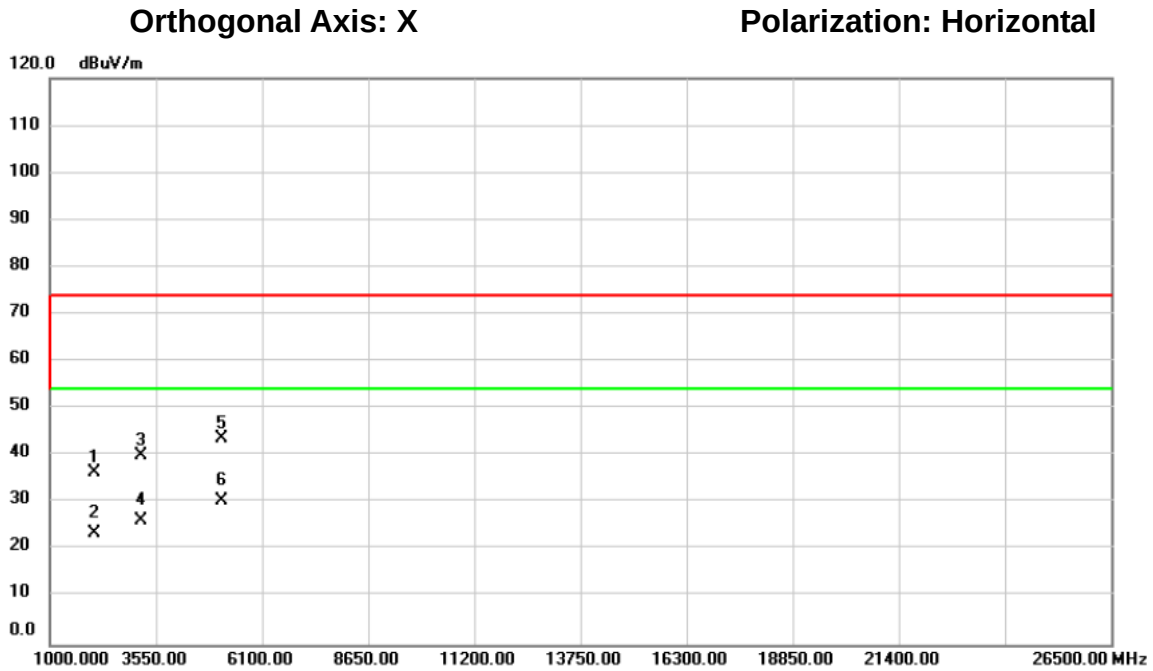


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2071.000	54.77	-18.45	36.32	74.00	-37.68	peak	
2		2071.000	42.01	-18.45	23.56	54.00	-30.44	AVG	
3		3193.000	54.98	-14.88	40.10	74.00	-33.90	peak	
4		3193.000	41.19	-14.88	26.31	54.00	-27.69	AVG	
5		5131.000	54.81	-11.27	43.54	74.00	-30.46	peak	
6	*	5131.000	41.58	-11.27	30.31	54.00	-23.69	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5755
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C

測試模式: RX_Adapter
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 108/03/08
 環境濕度: 70%

Orthogonal Axis: X


Polarization: Vertical

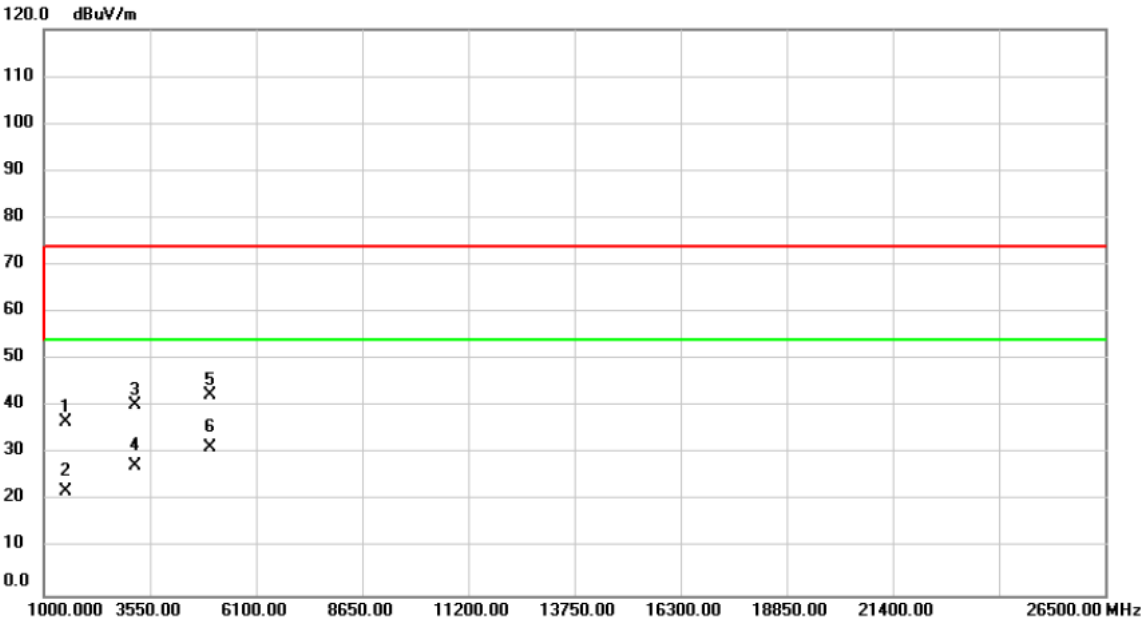

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1510.000	56.61	-19.99	36.62	74.00	-37.38	peak	
2		1510.000	42.13	-19.99	22.14	54.00	-31.86	AVG	
3		3193.000	55.12	-14.88	40.24	74.00	-33.76	peak	
4		3193.000	42.35	-14.88	27.47	54.00	-26.53	AVG	
5		4978.000	53.80	-11.43	42.37	74.00	-31.63	peak	
6	*	4978.000	42.64	-11.43	31.21	54.00	-22.79	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz 測試模式: RX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 108/03/08
 環境溫度: 23°C 環境濕度: 70%

Orthogonal Axis: X Polarization: Horizontal

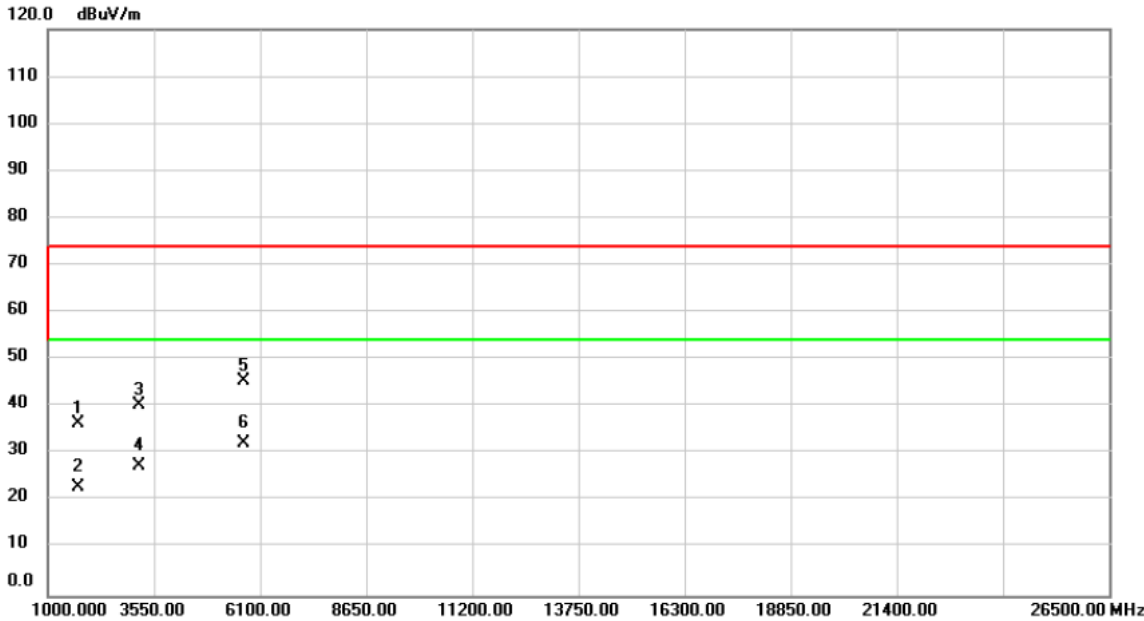

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1739.500	55.96	-19.38	36.58	74.00	-37.42	peak	
2		1739.500	42.24	-19.38	22.86	54.00	-31.14	AVG	
3		3193.000	55.30	-14.88	40.42	74.00	-33.58	peak	
4		3193.000	42.39	-14.88	27.51	54.00	-26.49	AVG	
5		5717.500	55.78	-10.38	45.40	74.00	-28.60	peak	
6	*	5717.500	42.56	-10.38	32.18	54.00	-21.82	AVG	

結束