


Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1321	

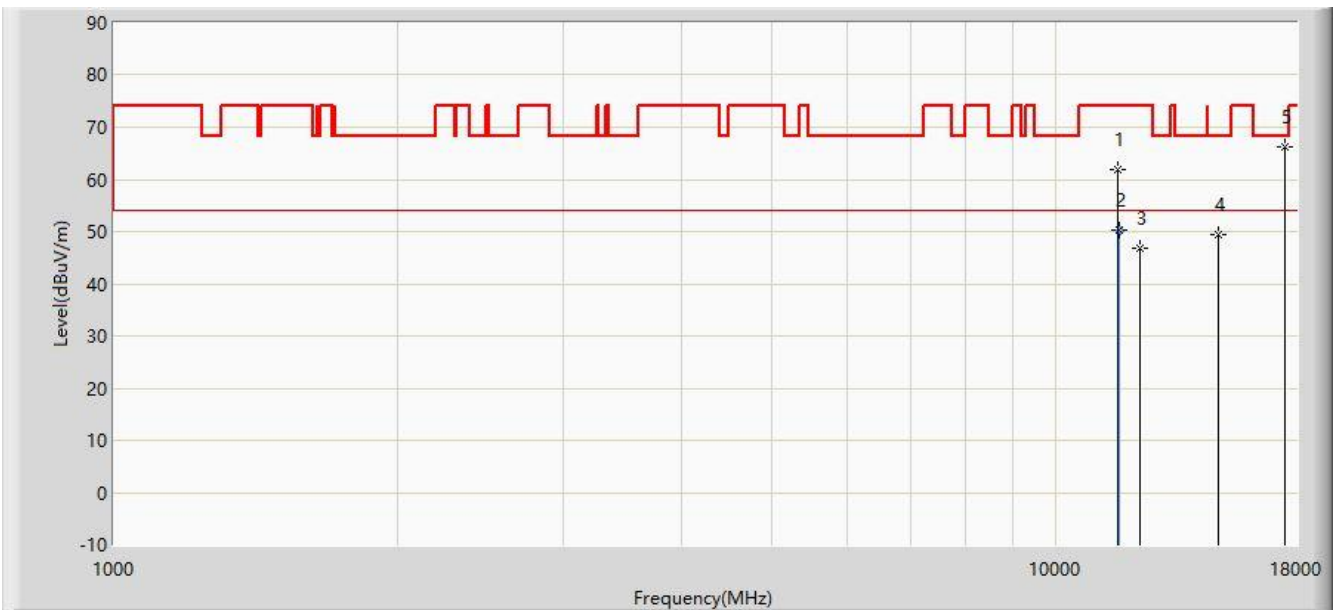


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11642.000	61.951	43.966	-12.049	74.000	17.985	PK
2			11650.100	50.369	32.388	-3.631	54.000	17.981	AV
3			12271.000	46.786	28.975	-27.214	74.000	17.811	PK
4			14846.500	49.377	28.628	-18.823	68.200	20.749	PK
5		*	17481.500	66.121	36.056	-2.079	68.200	30.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1321	

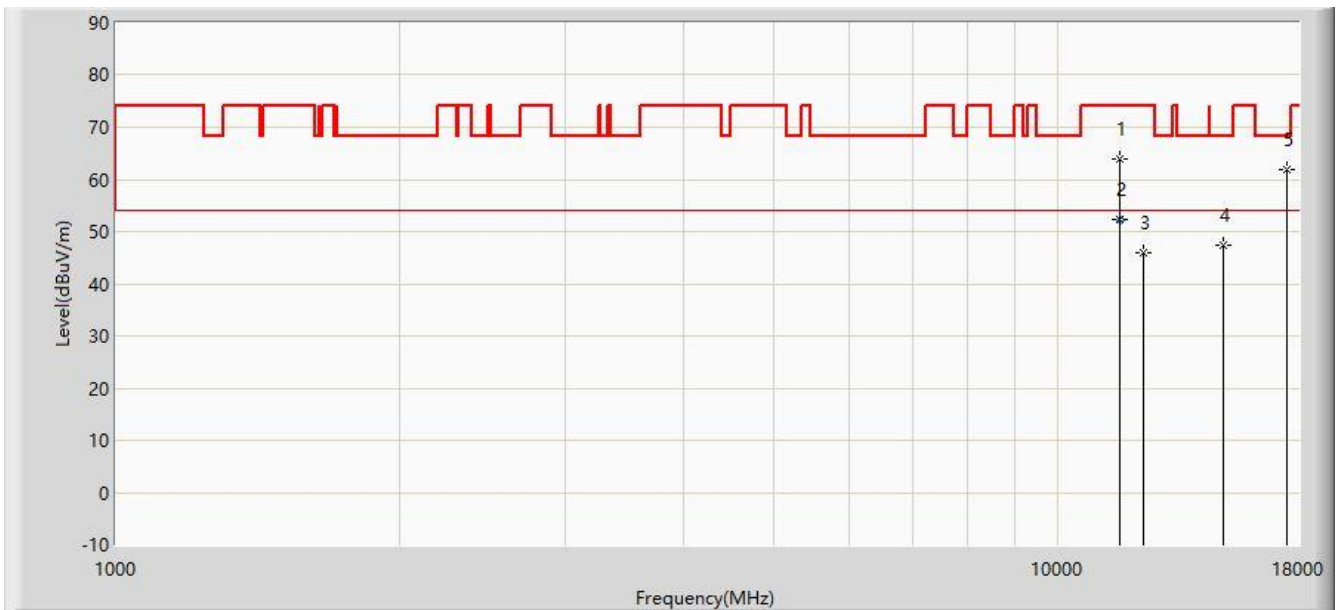


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11642.000	63.846	45.861	-10.154	74.000	17.985	PK
2		*	11645.500	52.222	34.239	-1.778	54.000	17.983	AV
3			12330.500	45.851	28.041	-28.149	74.000	17.810	PK
4			14948.500	47.408	26.632	-20.792	68.200	20.776	PK
5			17464.500	61.804	31.899	-6.396	68.200	29.905	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1321	

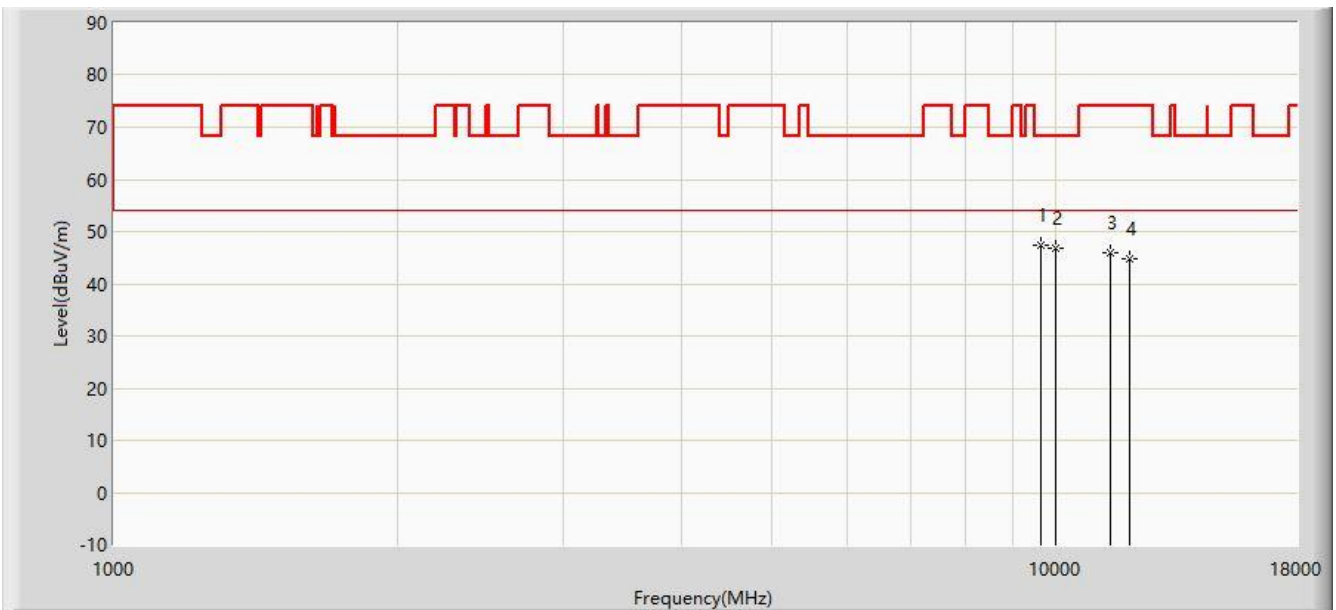


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.534	33.440	-20.666	68.200	14.094	PK
2			9993.000	46.857	31.619	-21.343	68.200	15.238	PK
3			11412.500	45.826	27.859	-28.174	74.000	17.966	PK
4			11948.000	44.765	26.921	-29.235	74.000	17.844	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1321	

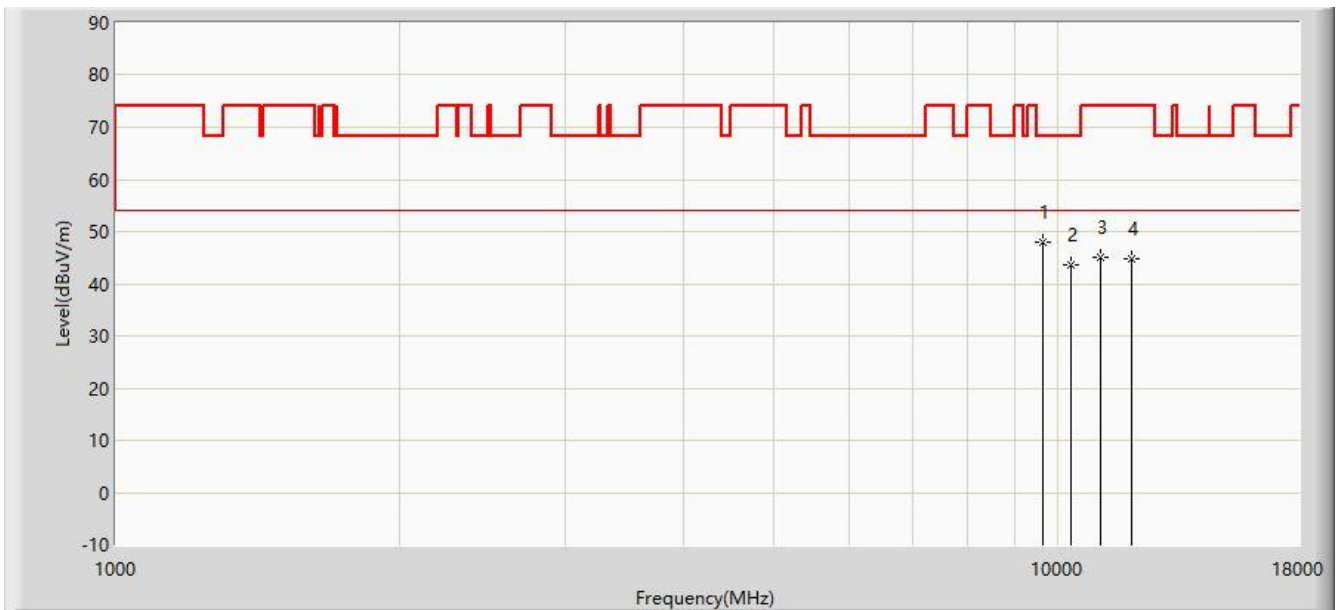


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.984	33.890	-20.216	68.200	14.094	PK
2			10307.500	43.633	27.382	-24.567	68.200	16.251	PK
3			11106.500	45.078	27.398	-28.922	74.000	17.679	PK
4			11948.000	44.765	26.921	-29.235	74.000	17.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5230MHz with OAW-AP1321	

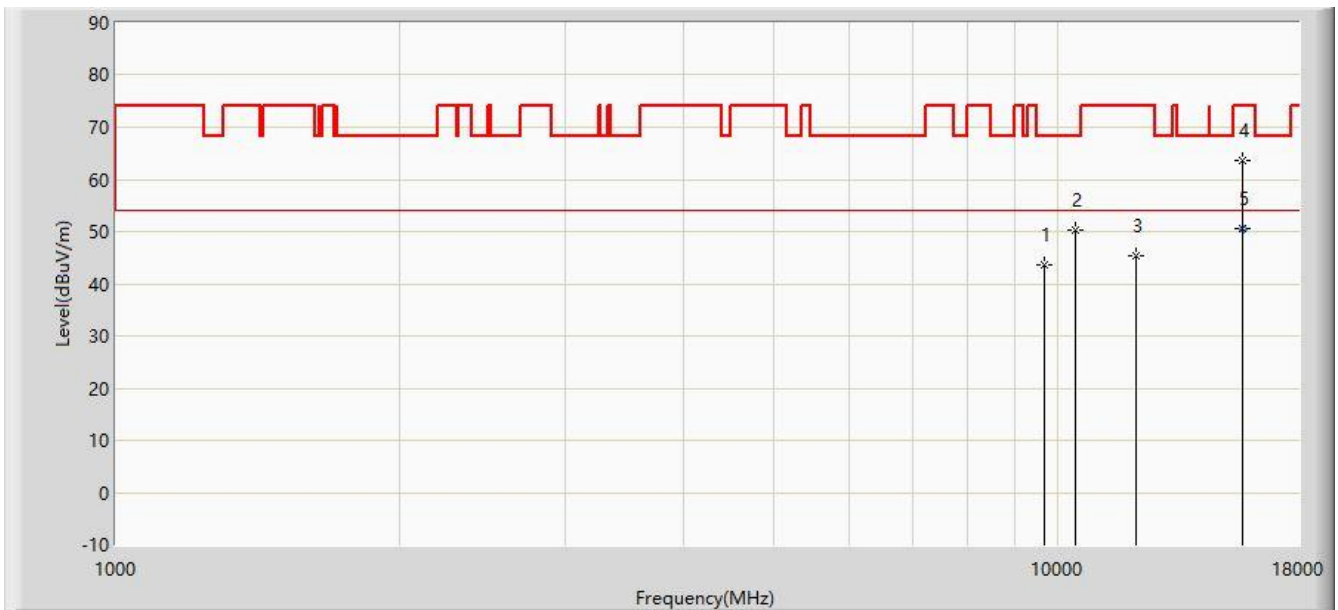


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9678.500	43.756	29.551	-24.444	68.200	14.205	PK
2			10443.500	50.429	33.741	-17.771	68.200	16.688	PK
3			12109.500	45.387	27.571	-28.613	74.000	17.816	PK
4			15671.000	63.534	42.735	-10.466	74.000	20.799	PK
5		*	15690.000	50.465	29.682	-3.535	54.000	20.783	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5230MHz with OAW-AP1321	

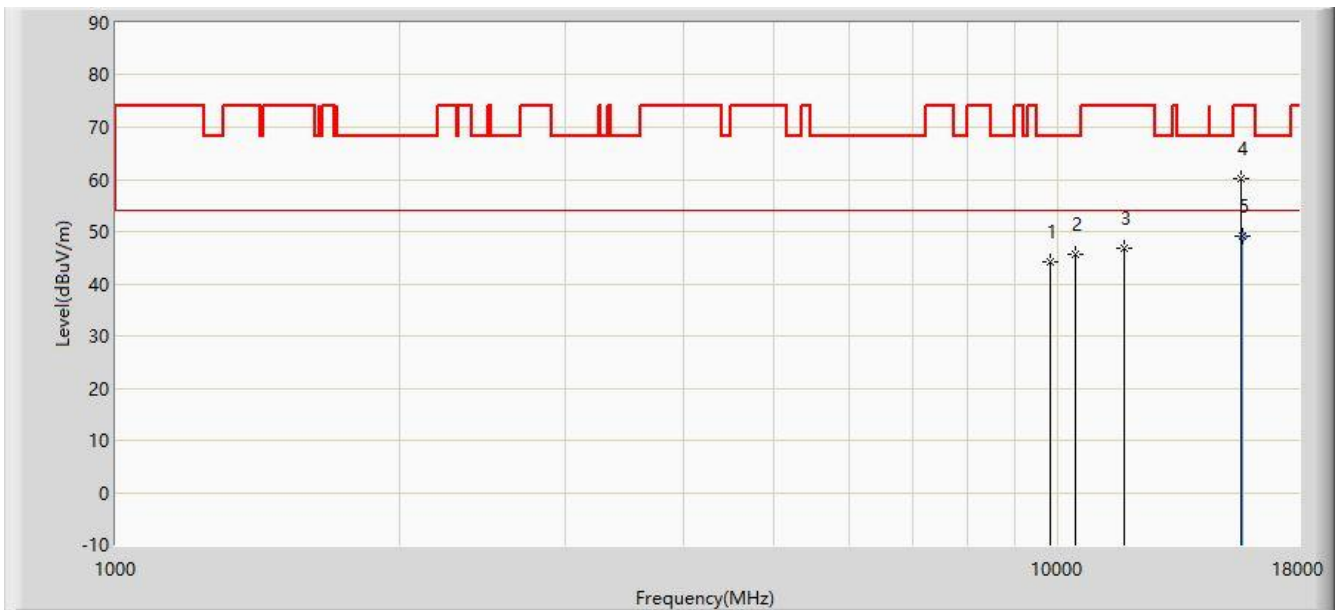


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	44.344	29.692	-23.856	68.200	14.652	PK
2			10443.500	45.533	28.845	-22.667	68.200	16.688	PK
3			11744.000	46.703	28.766	-27.297	74.000	17.937	PK
4			15662.500	60.051	39.244	-13.949	74.000	20.807	PK
5		*	15665.400	49.100	28.296	-4.900	54.000	20.804	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5270MHz with OAW-AP1321	

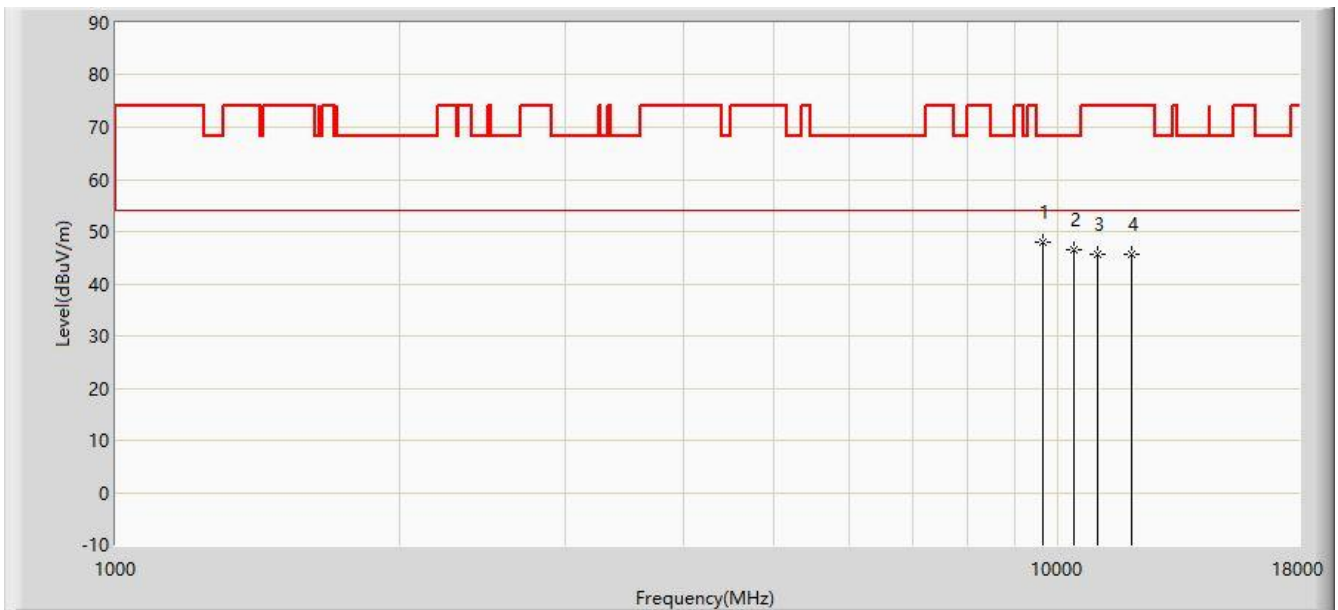


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	48.011	33.917	-20.189	68.200	14.094	PK
2			10392.500	46.379	29.856	-21.821	68.200	16.524	PK
3			11021.500	45.532	27.932	-28.468	74.000	17.600	PK
4			11965.000	45.711	27.875	-28.289	74.000	17.836	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5270MHz with OAW-AP1321	

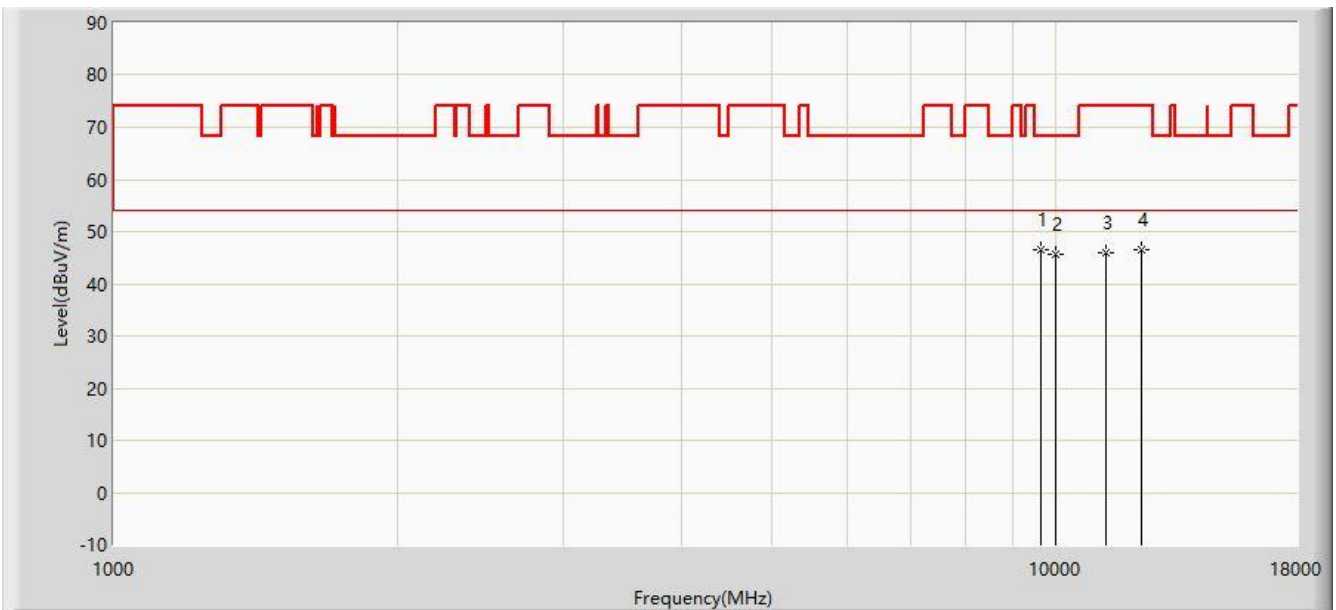


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	46.528	32.434	-21.672	68.200	14.094	PK
2			9984.500	45.785	30.575	-22.415	68.200	15.210	PK
3			11302.000	45.962	28.098	-28.038	74.000	17.864	PK
4			12330.500	46.620	28.810	-27.380	74.000	17.810	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1321	

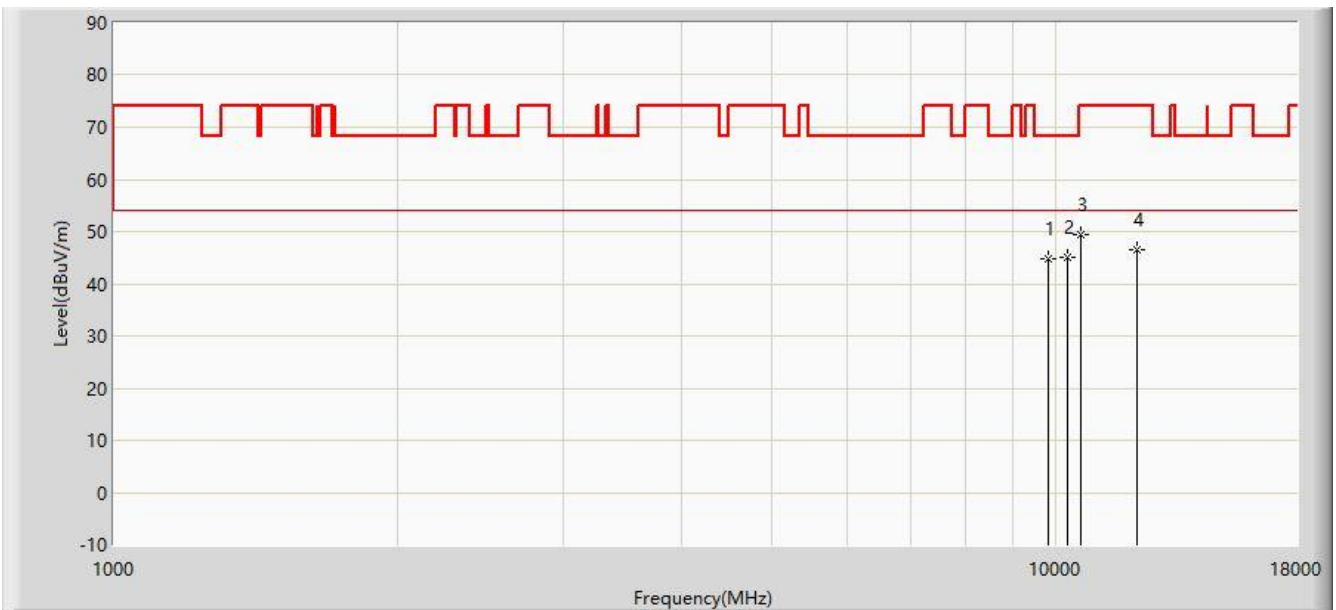


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9823.000	44.755	30.075	-23.445	68.200	14.680	PK
2		*	10273.500	45.124	28.984	-23.076	68.200	16.140	PK
3			10622.000	49.352	32.309	-24.648	74.000	17.043	PK
4			12169.000	46.647	28.831	-27.353	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1321	

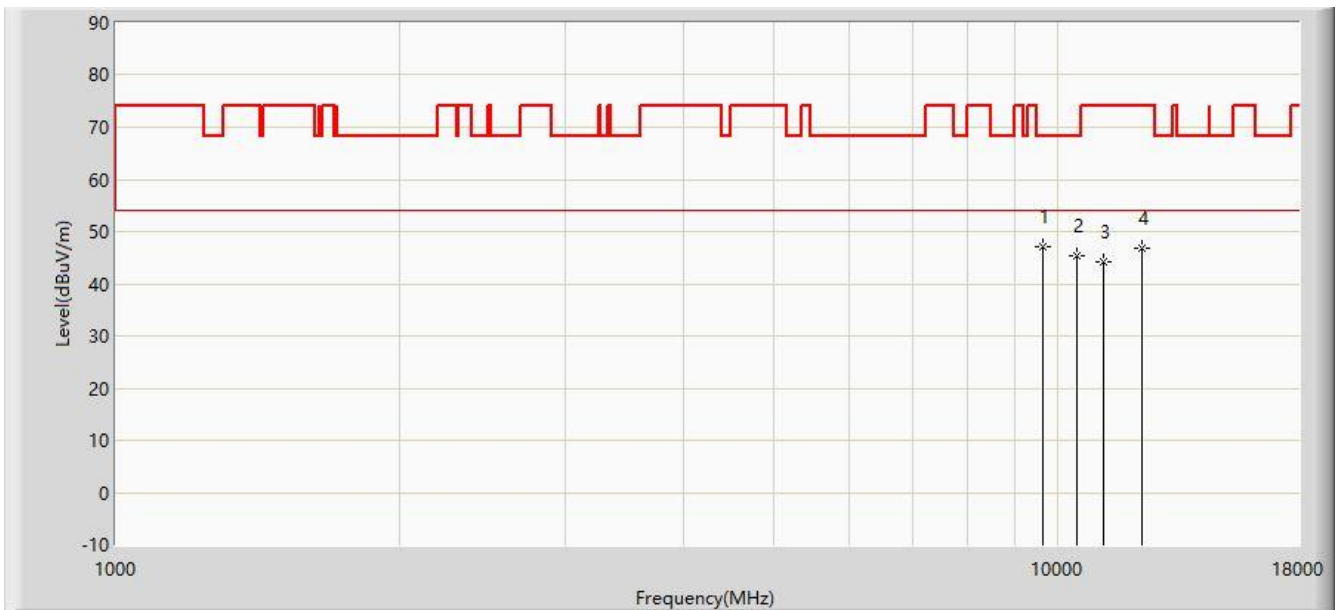


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.004	32.910	-21.196	68.200	14.094	PK
2			10452.000	45.504	28.789	-22.696	68.200	16.715	PK
3			11174.500	44.113	26.369	-29.887	74.000	17.743	PK
4			12262.500	46.711	28.899	-27.289	74.000	17.811	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1321	

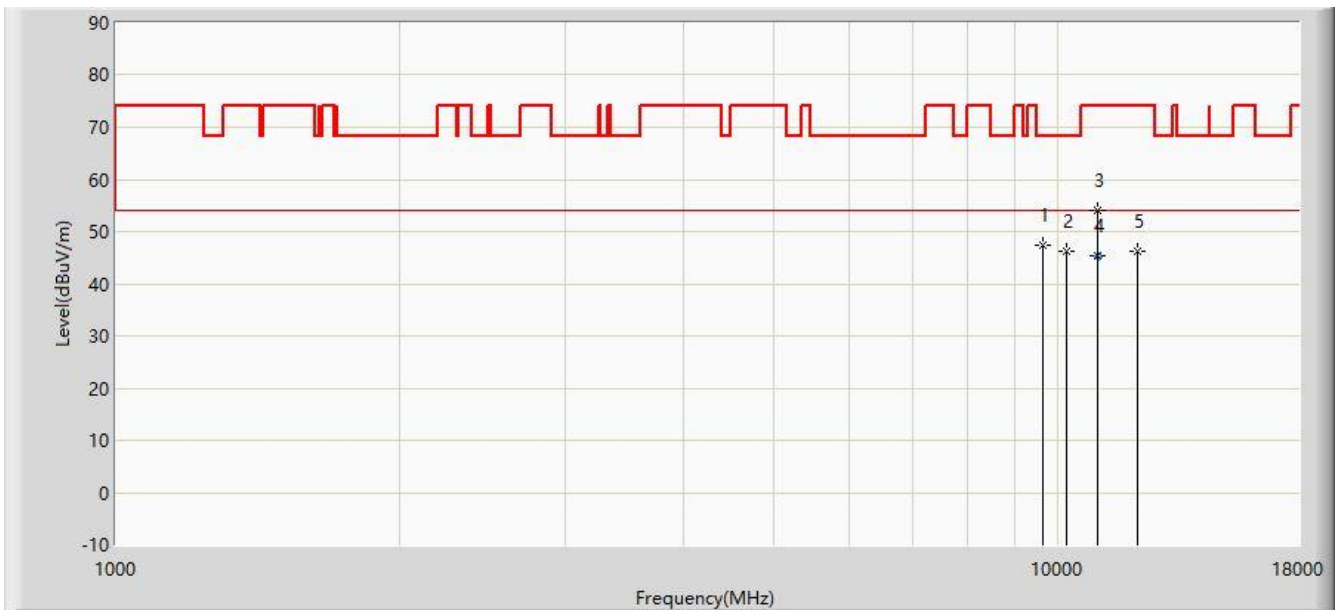

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.334	33.240	-20.866	68.200	14.094	PK
2			10205.500	46.174	30.252	-22.026	68.200	15.922	PK
3			11021.500	54.183	36.583	-19.817	74.000	17.600	PK
4		*	11023.000	45.312	50.160	-8.688	54.000	-4.848	AV
5			12126.500	46.367	28.551	-27.633	74.000	17.817	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1321	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.044	32.950	-21.156	68.200	14.094	PK
2			10248.000	45.935	29.876	-22.265	68.200	16.059	PK
3			11021.500	53.554	35.954	-20.446	74.000	17.600	PK
4		*	11024.300	44.818	27.215	-9.182	54.000	17.602	AV
5			11897.000	46.562	28.695	-27.438	74.000	17.867	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5590MHz with OAW-AP1321	

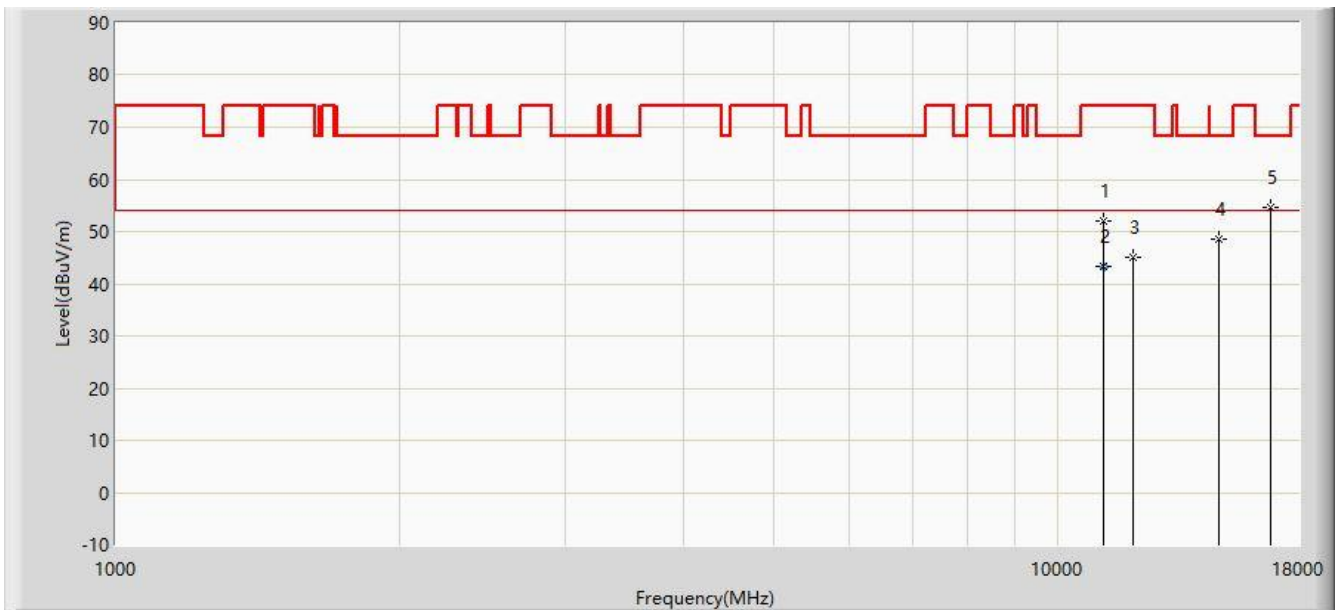


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11183.000	51.983	34.231	-22.017	74.000	17.752	PK
2		*	11185.300	43.462	25.708	-10.538	54.000	17.754	AV
3			12007.500	45.108	27.289	-28.892	74.000	17.820	PK
4			14829.500	48.512	27.768	-19.688	68.200	20.745	PK
5			16776.000	54.526	30.606	-13.674	68.200	23.920	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5590MHz with OAW-AP1321	

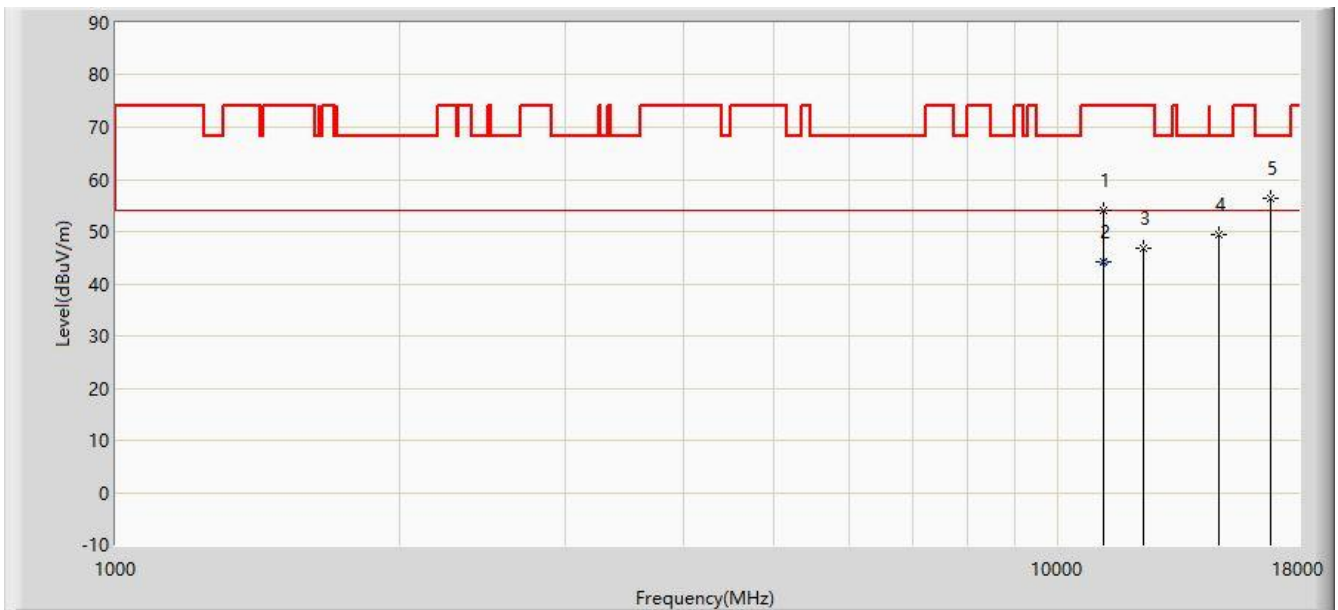


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11183.000	54.099	36.347	-19.901	74.000	17.752	PK
2		*	11184.300	44.070	26.317	-9.930	54.000	17.752	AV
3			12305.000	46.750	28.939	-27.250	74.000	17.811	PK
4			14812.500	49.286	28.546	-18.914	68.200	20.739	PK
5			16784.500	56.425	32.445	-11.775	68.200	23.979	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with OAW-AP1321	

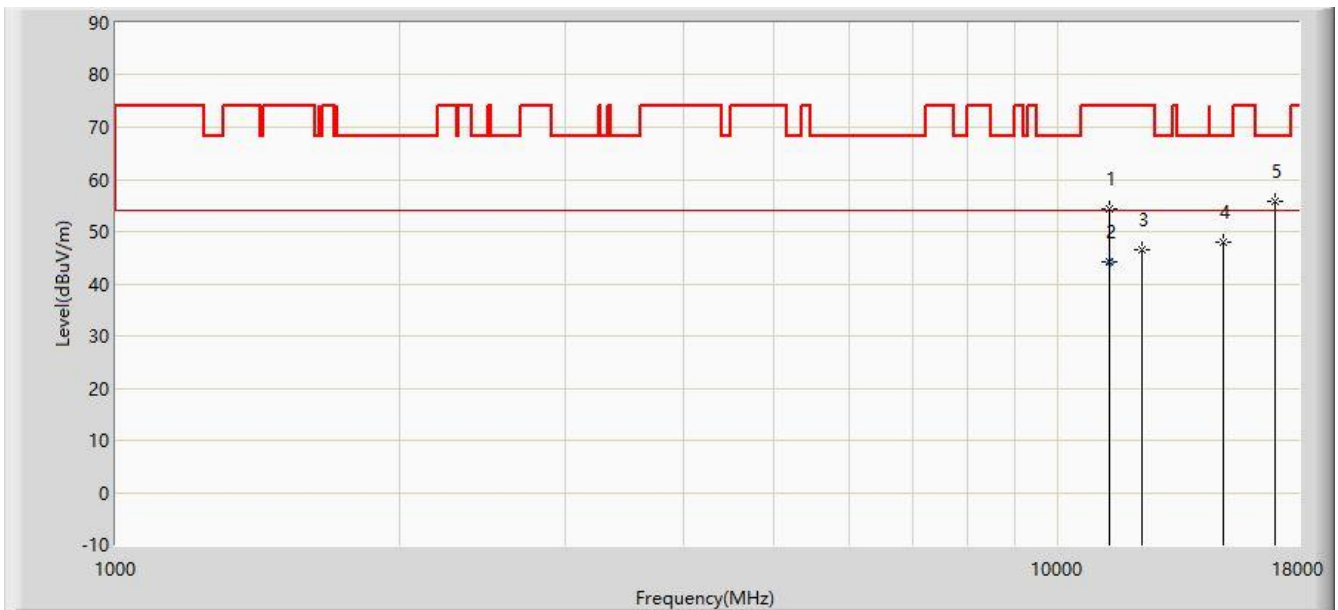


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11336.000	54.307	36.411	-19.693	74.000	17.896	PK
2		*	11337.300	44.165	26.268	-9.835	54.000	17.896	AV
3			12254.000	46.610	28.797	-27.390	74.000	17.813	PK
4			14965.500	47.899	27.119	-20.301	68.200	20.780	PK
5			17014.000	55.801	30.159	-12.399	68.200	25.642	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with OAW-AP1321	

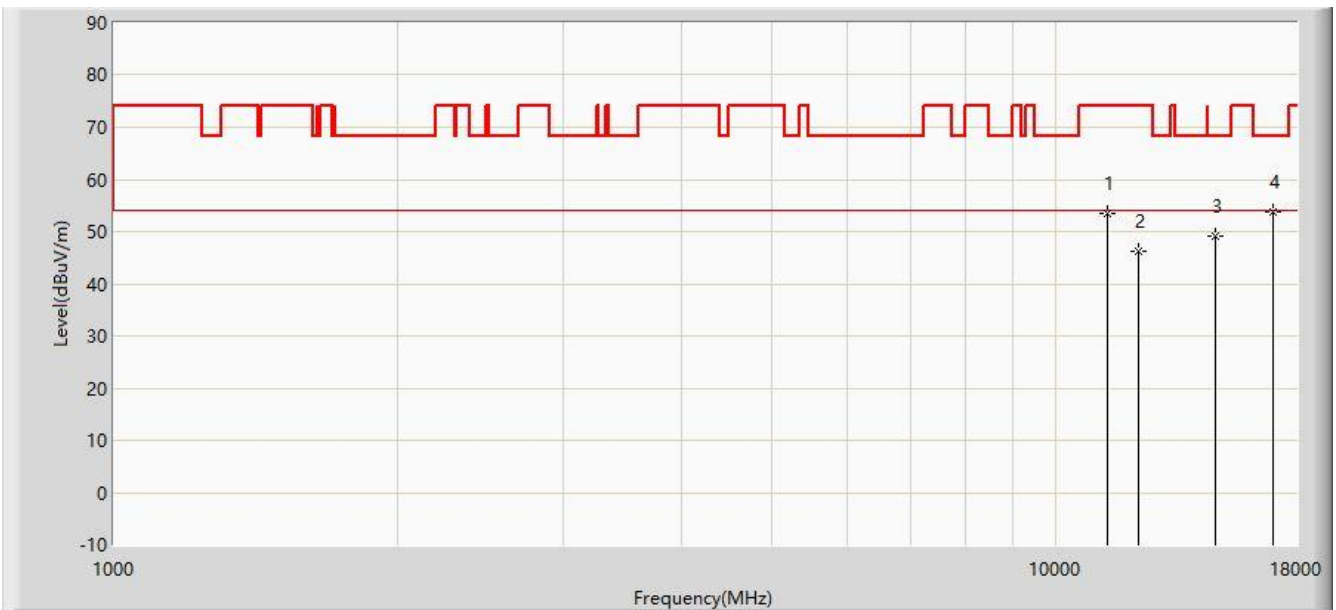


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11336.000	53.410	35.514	-20.590	74.000	17.896	PK
2			12211.500	46.110	28.296	-27.890	74.000	17.814	PK
3			14778.500	49.029	28.299	-19.171	68.200	20.731	PK
4		*	16988.500	53.687	28.259	-14.513	68.200	25.428	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5710MHz with OAW-AP1321	

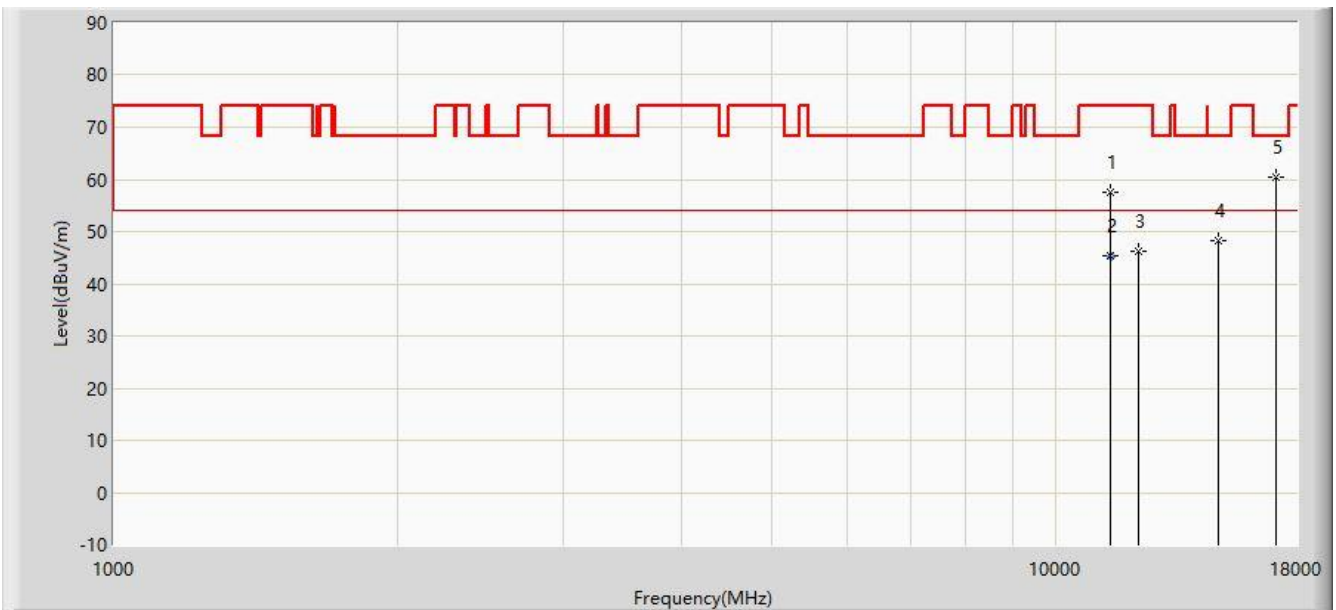


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11421.000	57.482	39.507	-16.518	74.000	17.975	PK
2			11423.400	45.284	27.307	-8.716	54.000	17.977	AV
3			12220.000	46.109	28.295	-27.891	74.000	17.814	PK
4			14880.500	48.295	27.538	-19.905	68.200	20.758	PK
5		*	17141.500	60.552	33.703	-7.648	68.200	26.849	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5710MHz with OAW-AP1321	

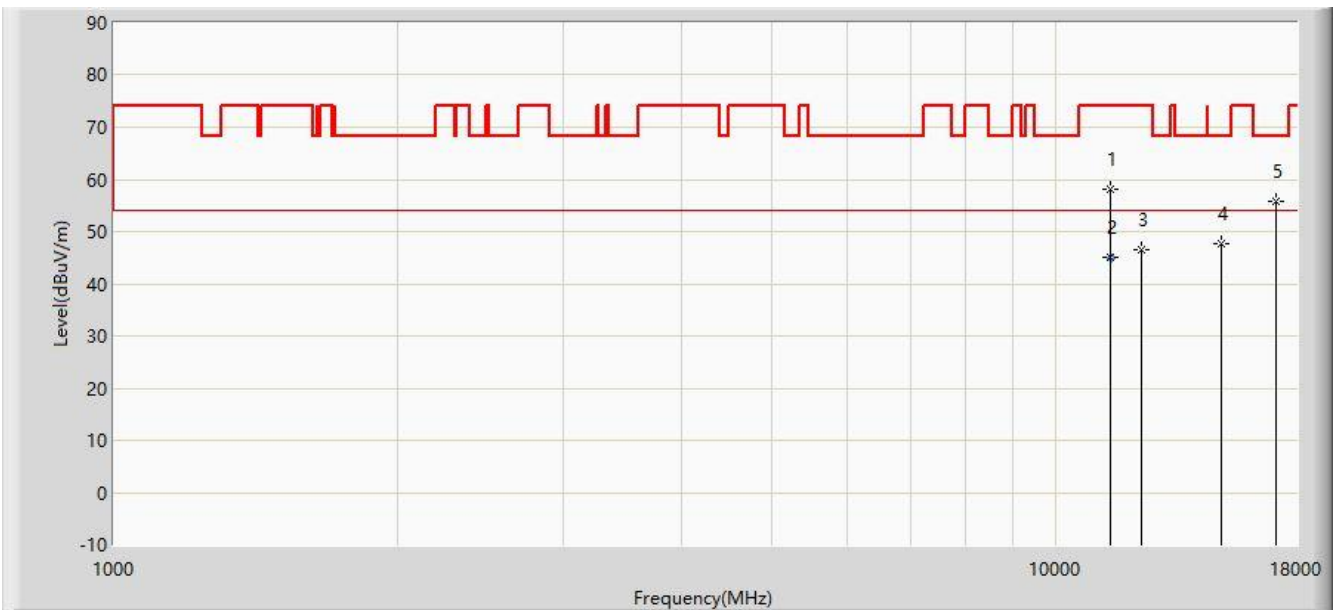


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11421.000	57.985	40.010	-16.015	74.000	17.975	PK
2		*	11422.600	45.121	27.144	-8.879	54.000	17.977	AV
3			12330.500	46.418	28.608	-27.582	74.000	17.810	PK
4			14948.500	47.760	26.984	-20.440	68.200	20.776	PK
5			17133.000	55.713	28.945	-12.487	68.200	26.768	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz with OAW-AP1321	

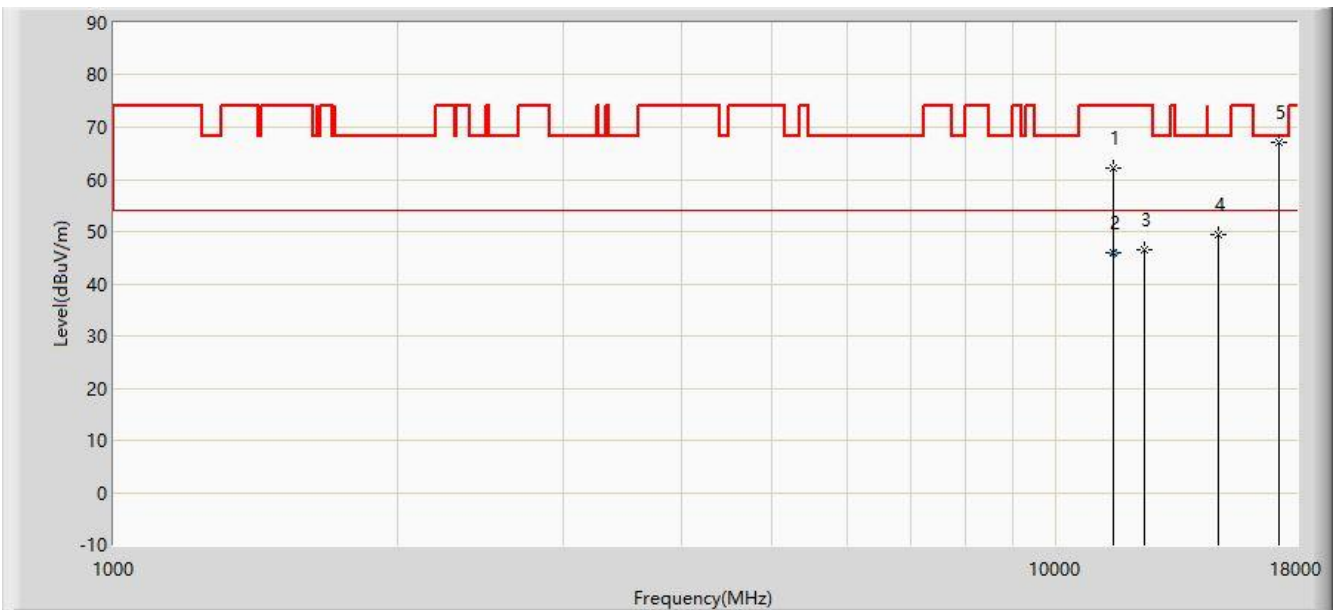


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11506.000	62.094	44.047	-11.906	74.000	18.047	PK
2			11508.300	45.905	27.859	-8.095	54.000	18.046	AV
3			12398.500	46.627	28.819	-27.373	74.000	17.807	PK
4			14838.000	49.368	28.621	-18.832	68.200	20.747	PK
5		*	17252.000	67.158	39.265	-1.042	68.200	27.893	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz with OAW-AP1321	

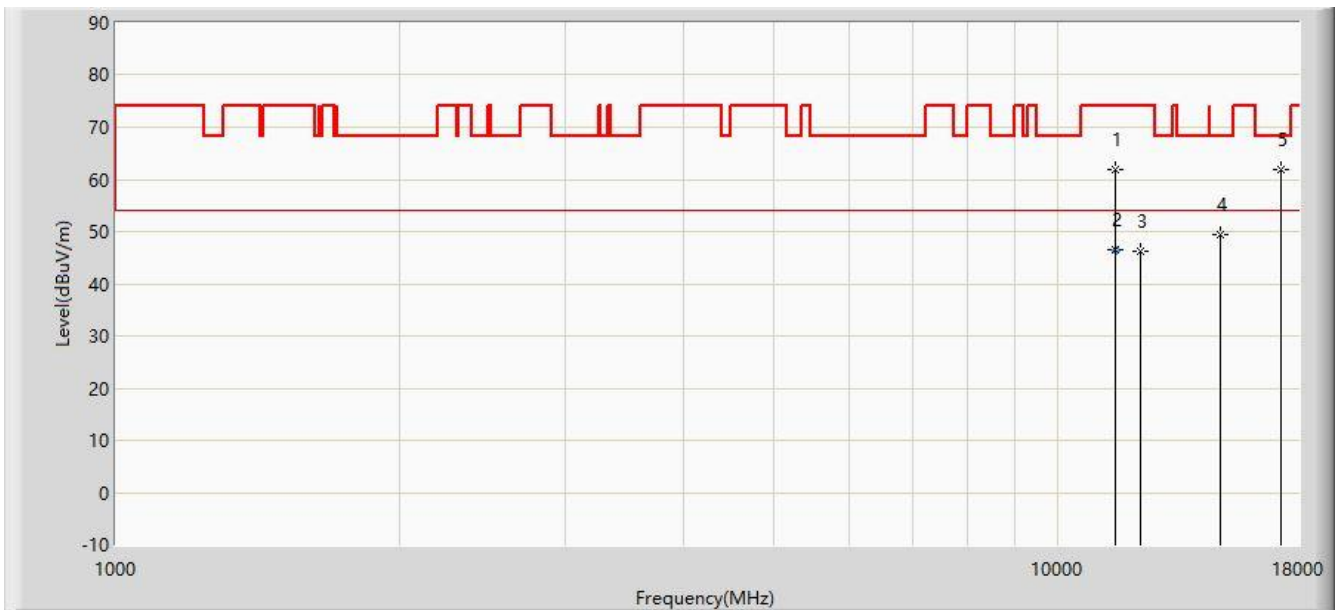


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11506.000	61.810	43.763	-12.190	74.000	18.047	PK
2			11508.400	46.585	28.539	-7.415	54.000	18.047	AV
3			12245.500	46.363	28.550	-27.637	74.000	17.813	PK
4			14838.000	49.285	28.538	-18.915	68.200	20.747	PK
5		*	17260.500	61.943	33.969	-6.257	68.200	27.974	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz with OAW-AP1321	

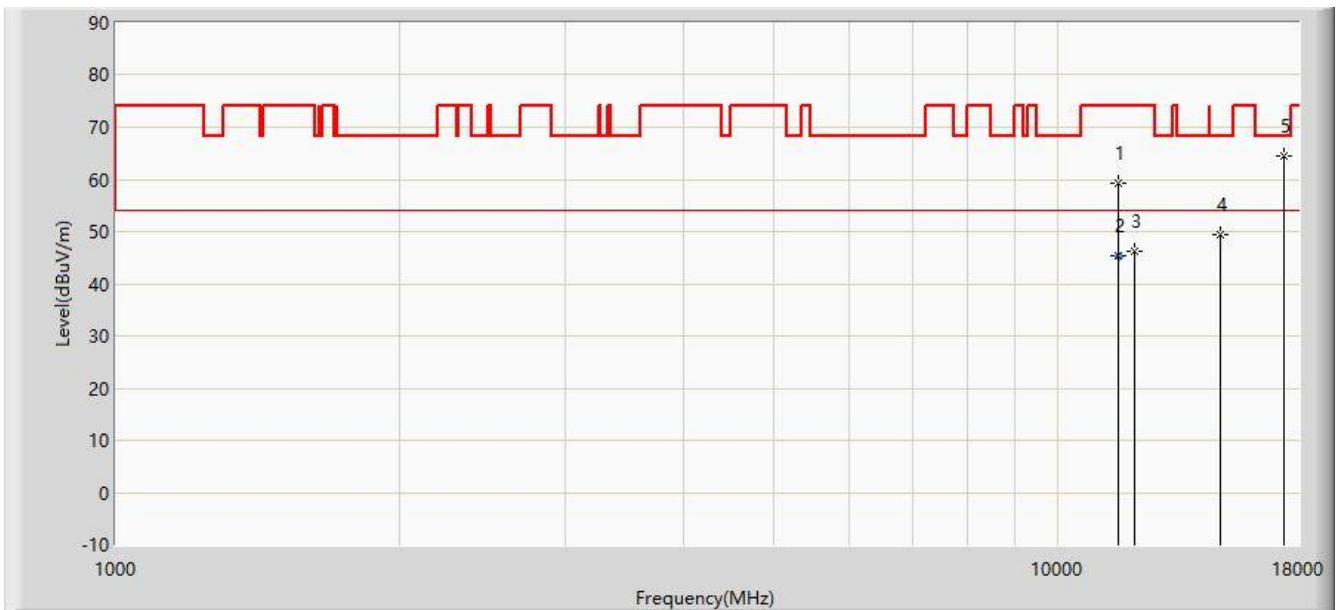


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11582.500	59.332	41.320	-14.668	74.000	18.012	PK
2			11590.000	45.448	27.439	-8.552	54.000	18.009	AV
3			12058.500	46.175	28.357	-27.825	74.000	17.818	PK
4			14855.000	49.425	28.674	-18.775	68.200	20.751	PK
5		*	17371.000	64.534	35.514	-3.666	68.200	29.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz with OAW-AP1321	

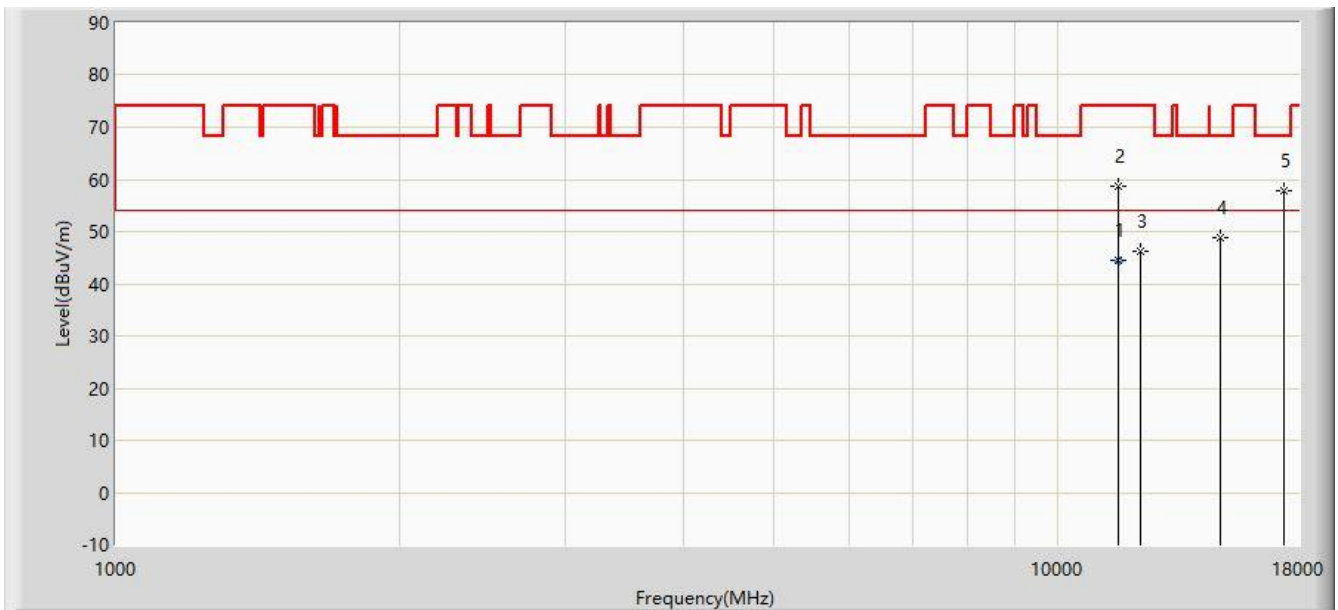


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	11590.000	44.568	26.559	-9.432	54.000	18.009	AV
2			11591.000	58.828	40.820	-15.172	74.000	18.008	PK
3			12211.500	46.103	28.289	-27.897	74.000	17.814	PK
4			14838.000	48.774	28.027	-19.426	68.200	20.747	PK
5			17379.500	57.714	28.613	-10.486	68.200	29.101	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1321	

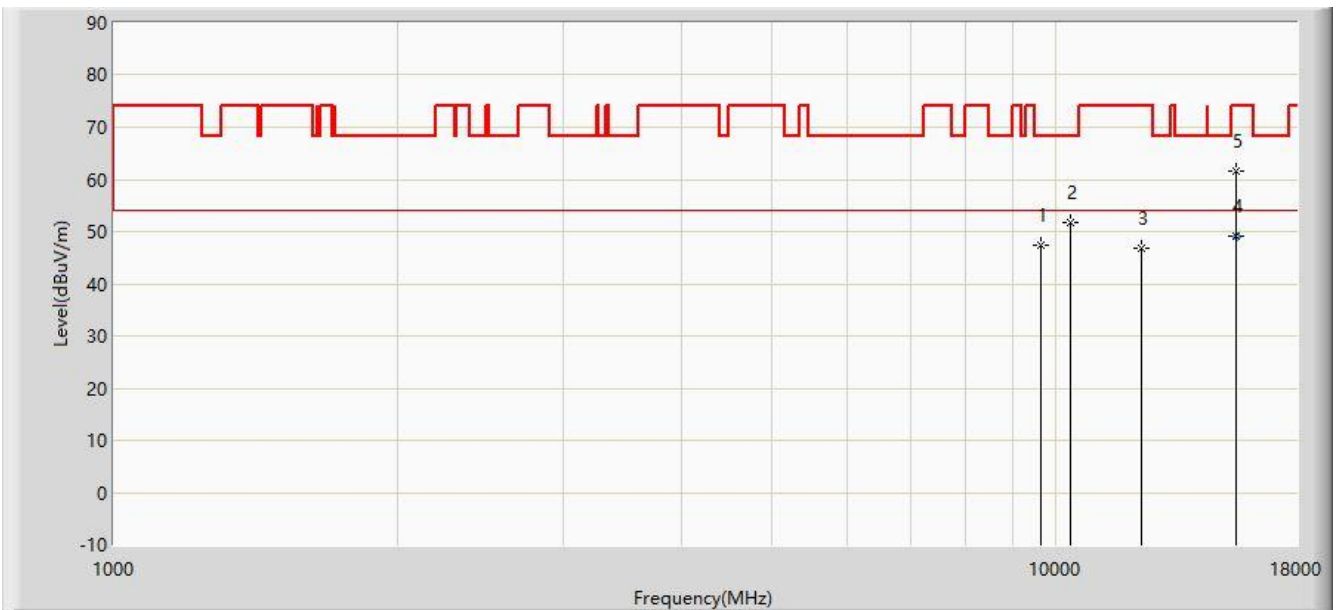


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.333	33.239	-20.867	68.200	14.094	PK
2			10367.000	51.611	35.170	-16.589	68.200	16.441	PK
3			12305.000	46.758	28.947	-27.242	74.000	17.811	PK
4		*	15540.000	49.083	28.168	-4.917	54.000	20.915	AV
5			15543.500	61.590	40.679	-12.410	74.000	20.912	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1321	

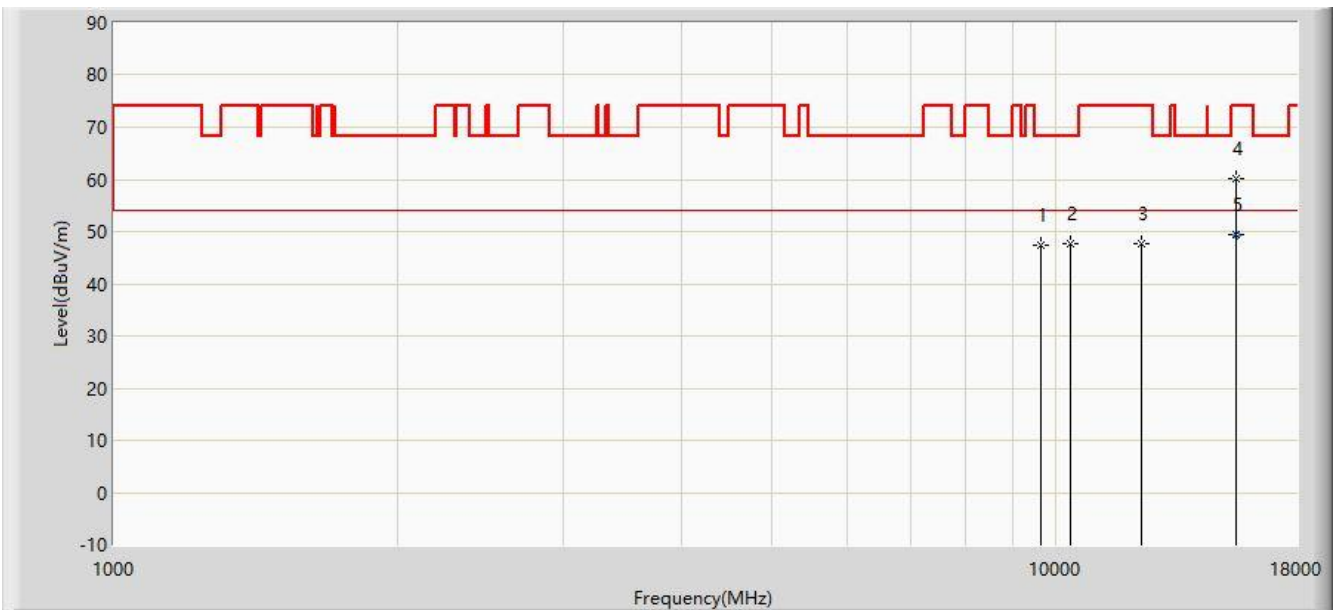


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.275	33.181	-20.925	68.200	14.094	PK
2			10358.500	47.706	31.292	-20.494	68.200	16.414	PK
3			12339.000	47.596	29.786	-26.404	74.000	17.810	PK
4			15543.500	60.203	39.292	-13.797	74.000	20.912	PK
5		*	15545.000	49.389	28.479	-4.611	54.000	20.910	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5220MHz with OAW-AP1321	

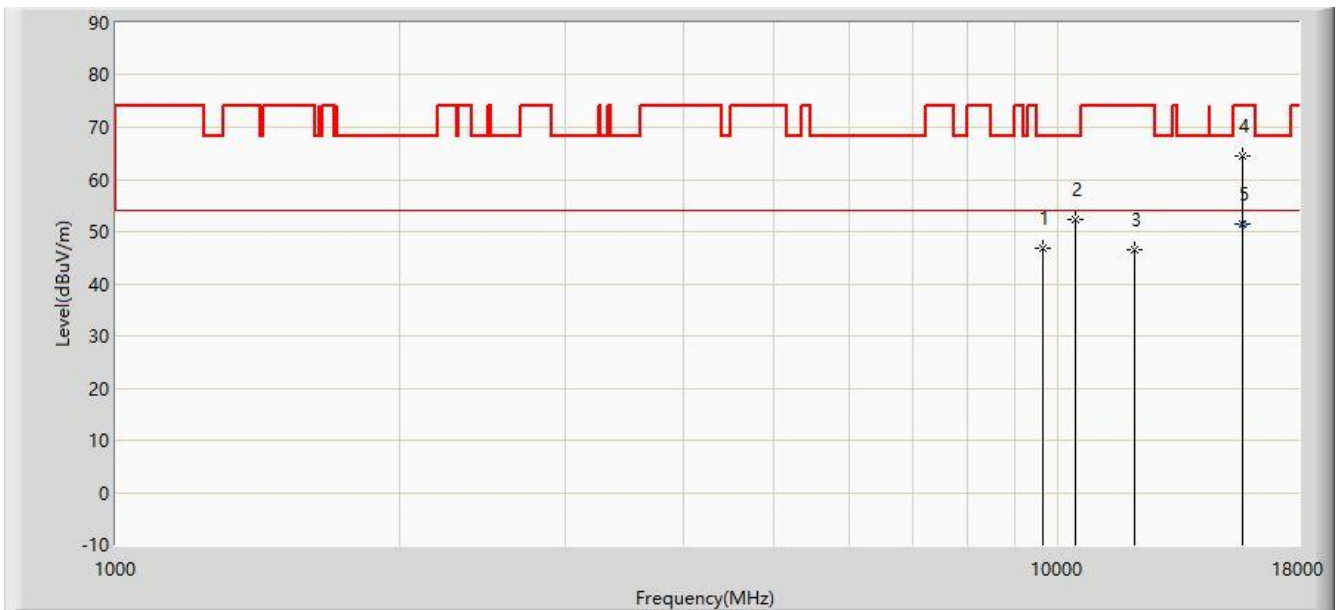


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.935	32.841	-21.265	68.200	14.094	PK
2			10435.000	52.221	35.560	-15.979	68.200	16.661	PK
3			12067.000	46.647	28.829	-27.353	74.000	17.818	PK
4			15671.000	64.407	43.608	-9.593	74.000	20.799	PK
5		*	15673.400	51.533	30.736	-2.467	54.000	20.798	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5220MHz with OAW-AP1321	

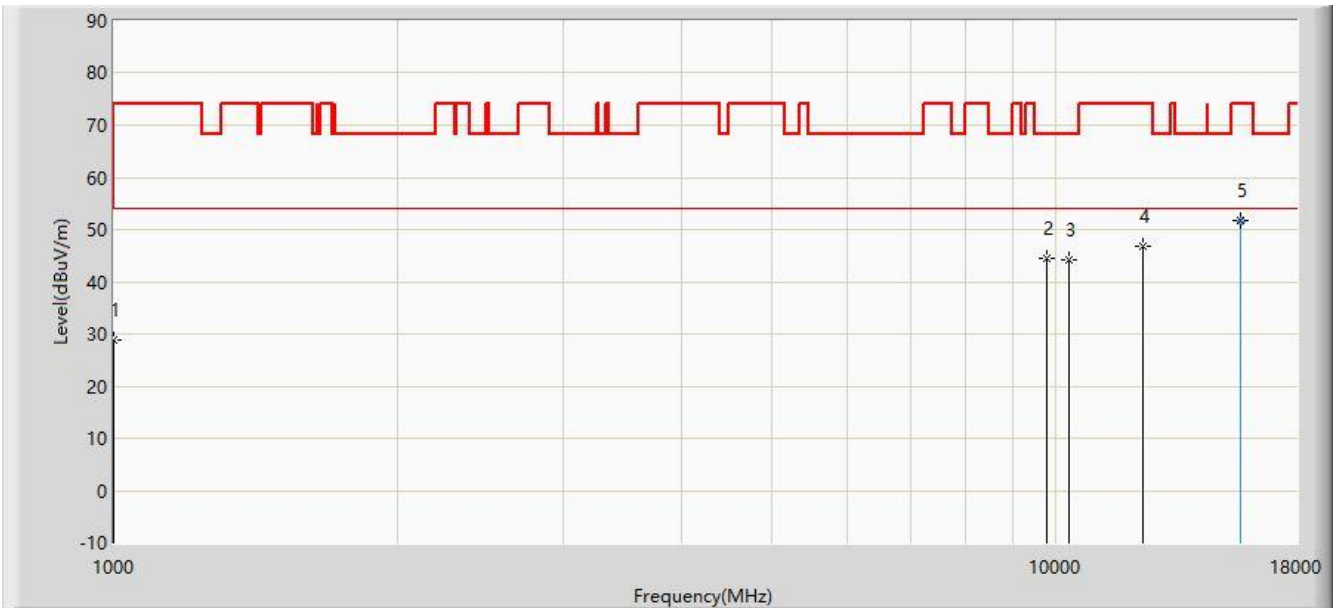


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			1000.000	28.869	36.320	-25.131	54.000	-7.451	PK
2			9772.000	44.479	29.967	-23.721	68.200	14.512	PK
3			10307.500	44.193	27.942	-24.007	68.200	16.251	PK
4			12373.000	46.752	28.943	-27.248	74.000	17.809	PK
5		*	15665.200	51.863	31.059	-2.137	54.000	20.805	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5240MHz with OAW-AP1321	

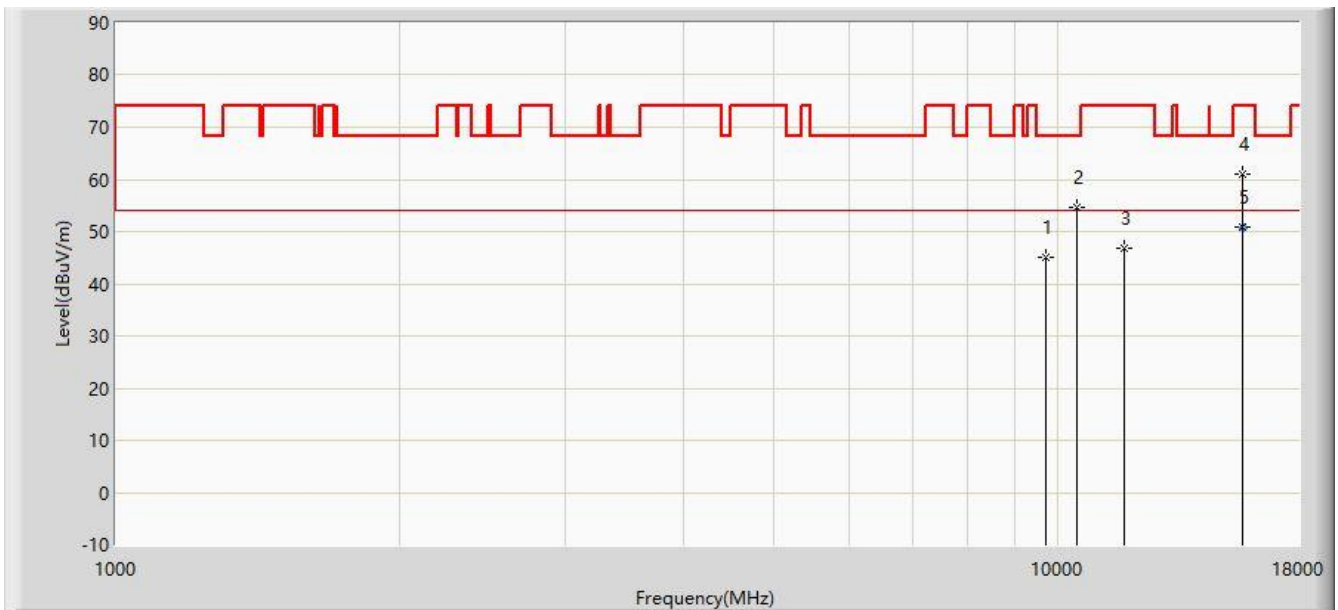


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	45.038	30.693	-23.162	68.200	14.345	PK
2			10477.500	54.531	37.734	-13.669	68.200	16.797	PK
3			11735.500	46.921	28.980	-27.079	74.000	17.941	PK
4			15713.500	60.996	40.234	-13.004	74.000	20.762	PK
5		*	15715.300	50.741	29.981	-3.259	54.000	20.760	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5240MHz with OAW-AP1321	

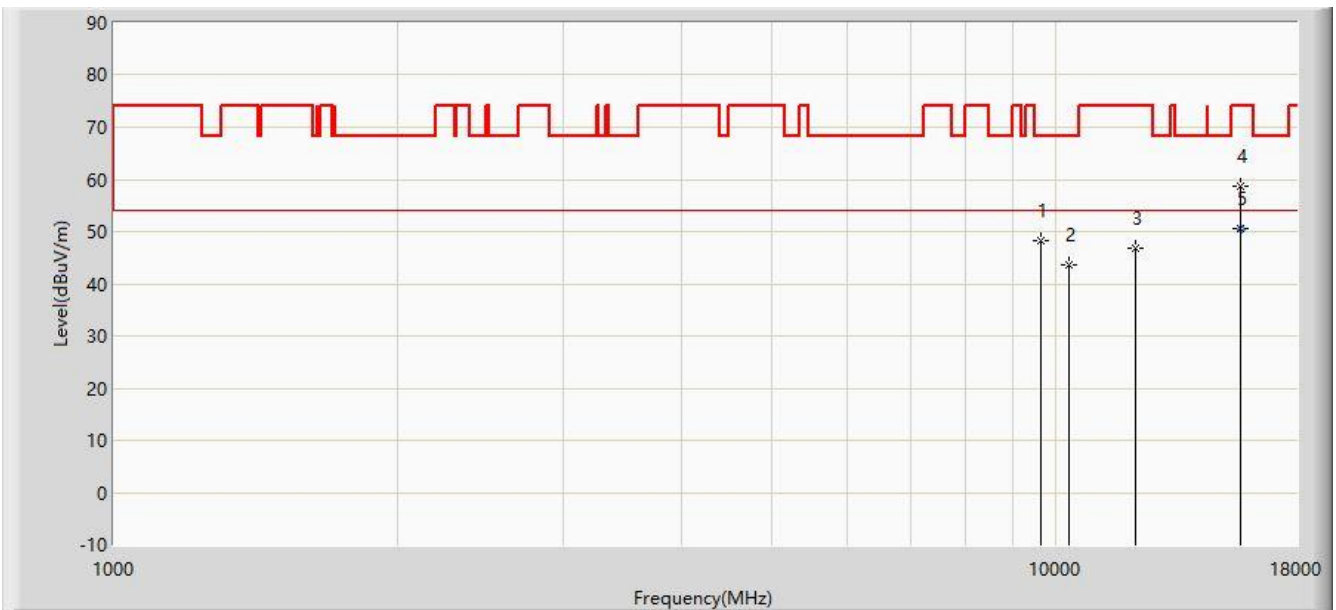


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.218	34.124	-19.982	68.200	14.094	PK
2			10307.500	43.604	27.353	-24.596	68.200	16.251	PK
3			12143.500	46.842	29.026	-27.158	74.000	17.816	PK
4			15713.500	58.590	37.828	-15.410	74.000	20.762	PK
5		*	15715.100	50.709	29.948	-3.291	54.000	20.761	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5260MHz with OAW-AP1321	

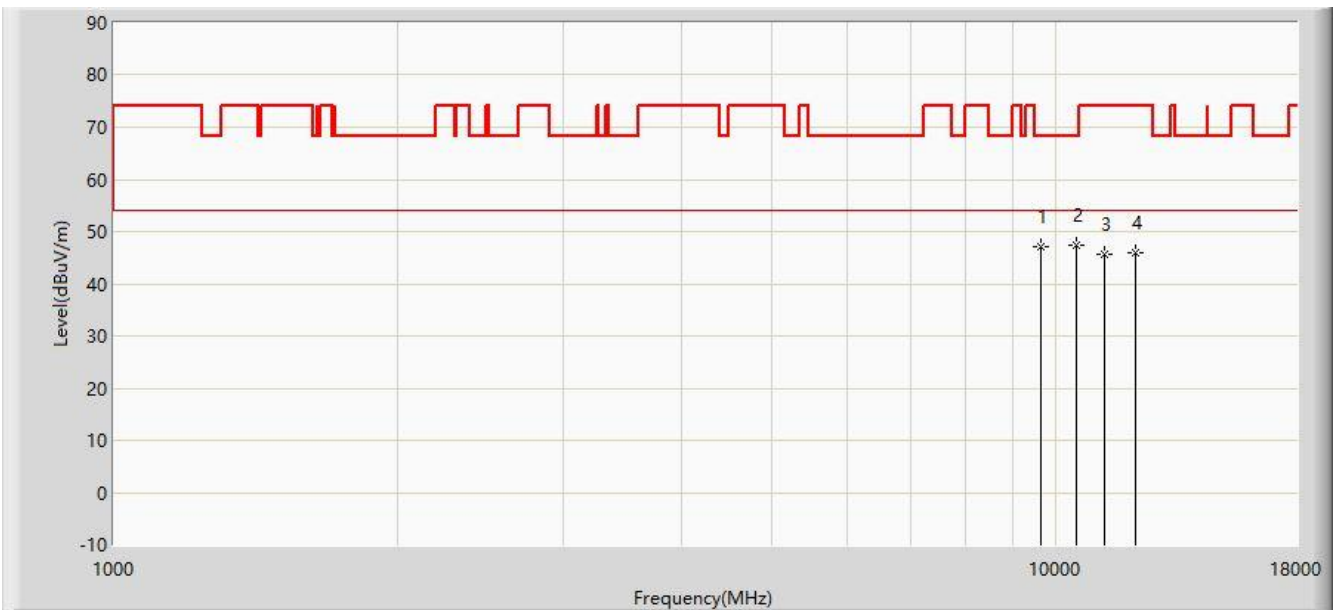


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.089	32.995	-21.111	68.200	14.094	PK
2		*	10520.000	47.451	30.553	-20.749	68.200	16.898	PK
3			11234.000	45.510	27.710	-28.490	74.000	17.800	PK
4			12135.000	45.907	28.091	-28.093	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5260MHz with OAW-AP1321	

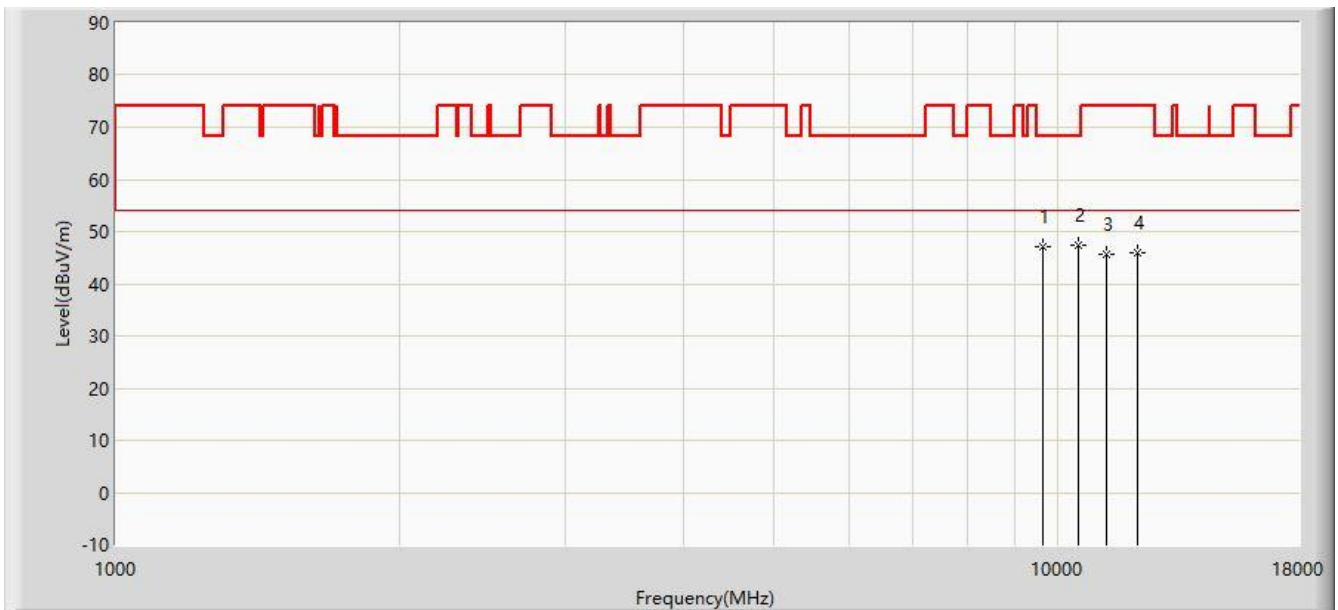


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.089	32.995	-21.111	68.200	14.094	PK
2		*	10520.000	47.451	30.553	-20.749	68.200	16.898	PK
3			11234.000	45.510	27.710	-28.490	74.000	17.800	PK
4			12135.000	45.907	28.091	-28.093	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5260MHz with OAW-AP1321	

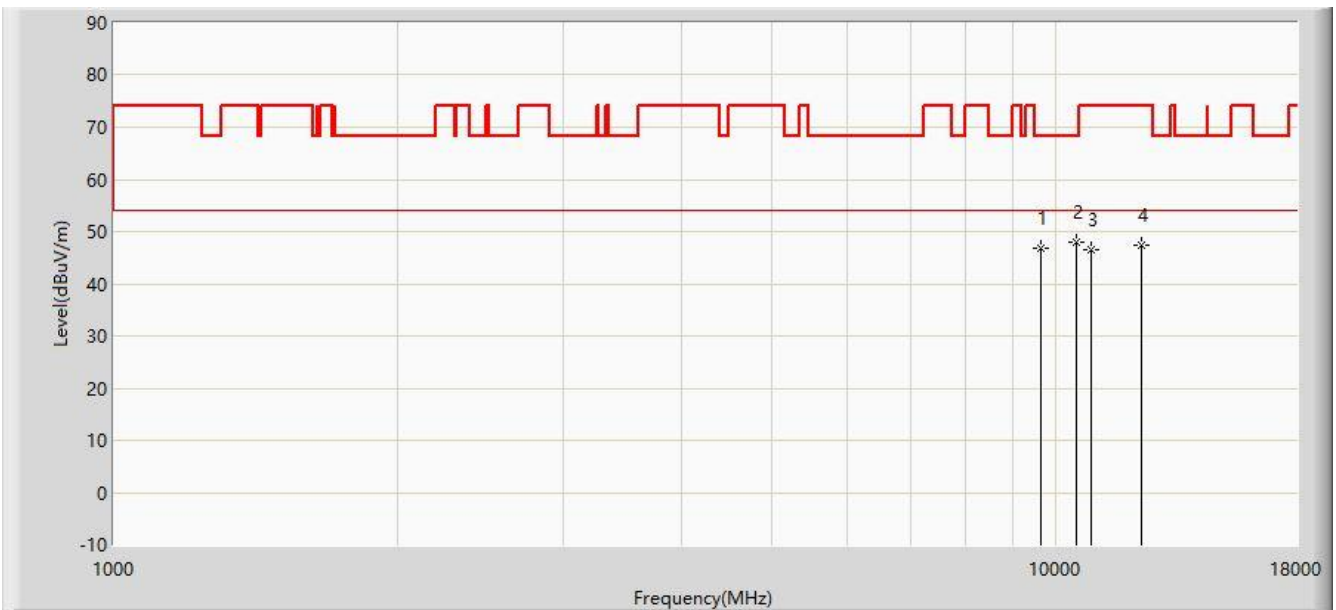


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.721	32.627	-21.479	68.200	14.094	PK
2		*	10520.000	47.979	31.081	-20.221	68.200	16.898	PK
3			10885.500	46.387	28.969	-27.613	74.000	17.417	PK
4			12313.500	47.426	29.615	-26.574	74.000	17.812	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5300MHz with OAW-AP1321	

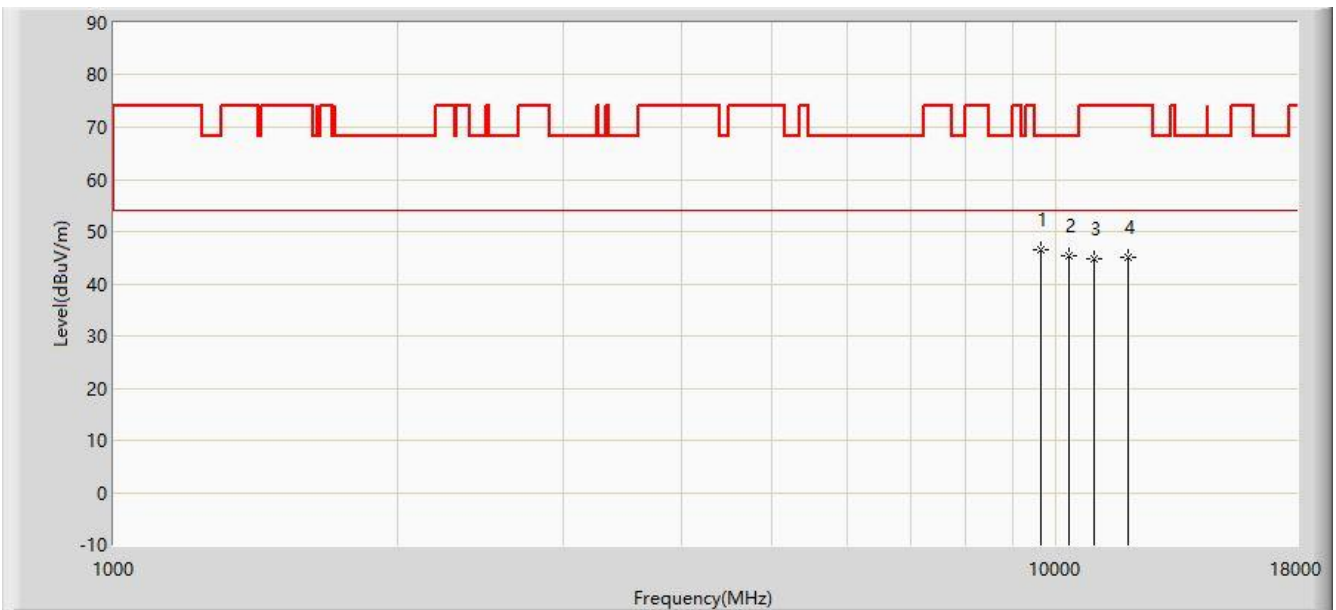


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	46.447	32.353	-21.753	68.200	14.094	PK
2			10333.000	45.247	28.914	-22.953	68.200	16.333	PK
3			10962.000	44.746	27.220	-29.254	74.000	17.526	PK
4			11914.000	44.977	27.117	-29.023	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5300MHz with OAW-AP1321	

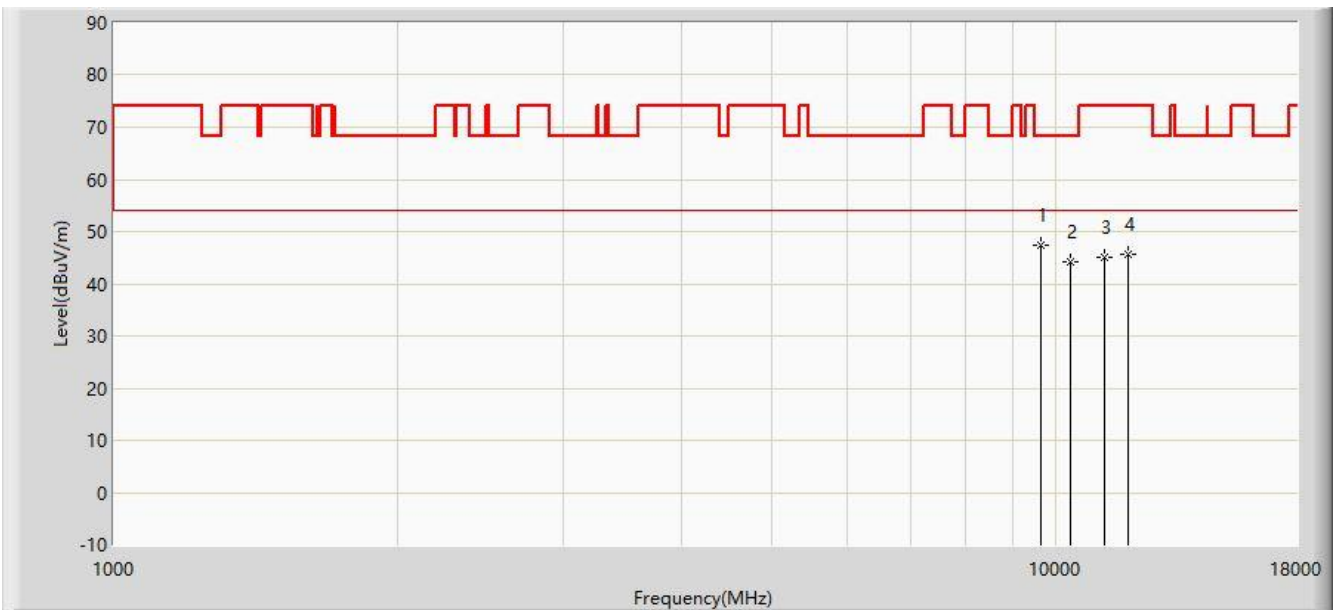


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.482	33.388	-20.718	68.200	14.094	PK
2			10341.500	44.284	27.924	-23.916	68.200	16.360	PK
3			11234.000	45.158	27.358	-28.842	74.000	17.800	PK
4			11931.000	45.662	27.811	-28.338	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1321	

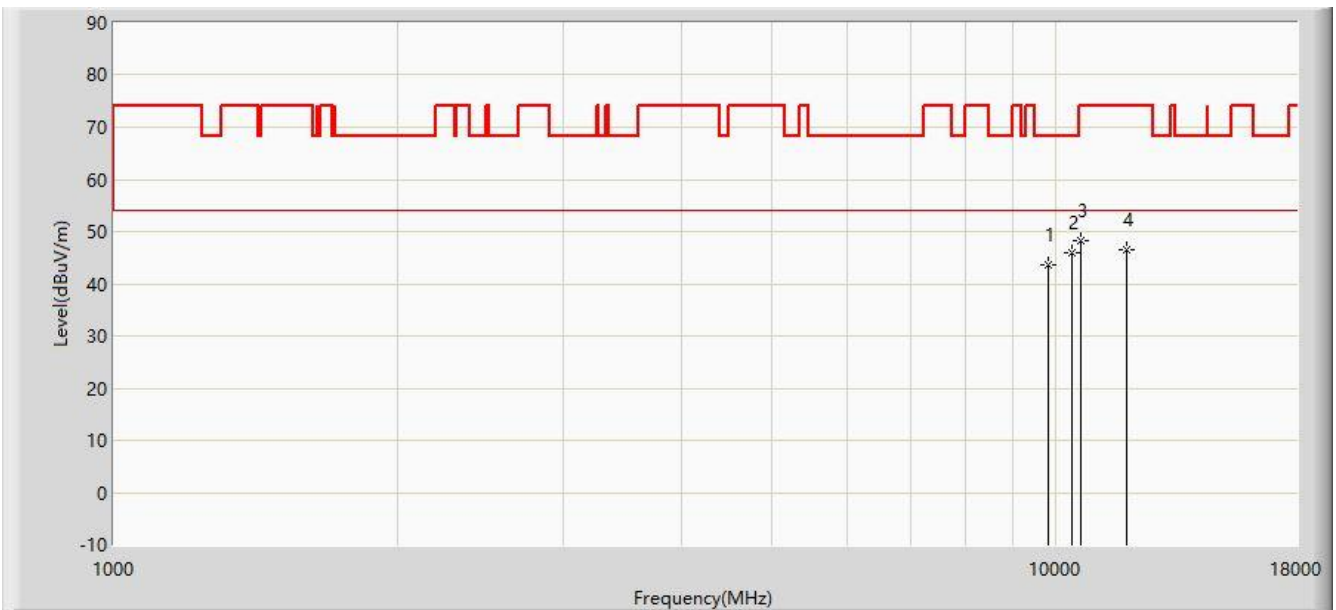


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	43.738	29.086	-24.462	68.200	14.652	PK
2		*	10392.500	45.994	29.471	-22.206	68.200	16.524	PK
3			10639.000	48.211	31.143	-25.789	74.000	17.068	PK
4			11863.000	46.477	28.594	-27.523	74.000	17.883	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1321	

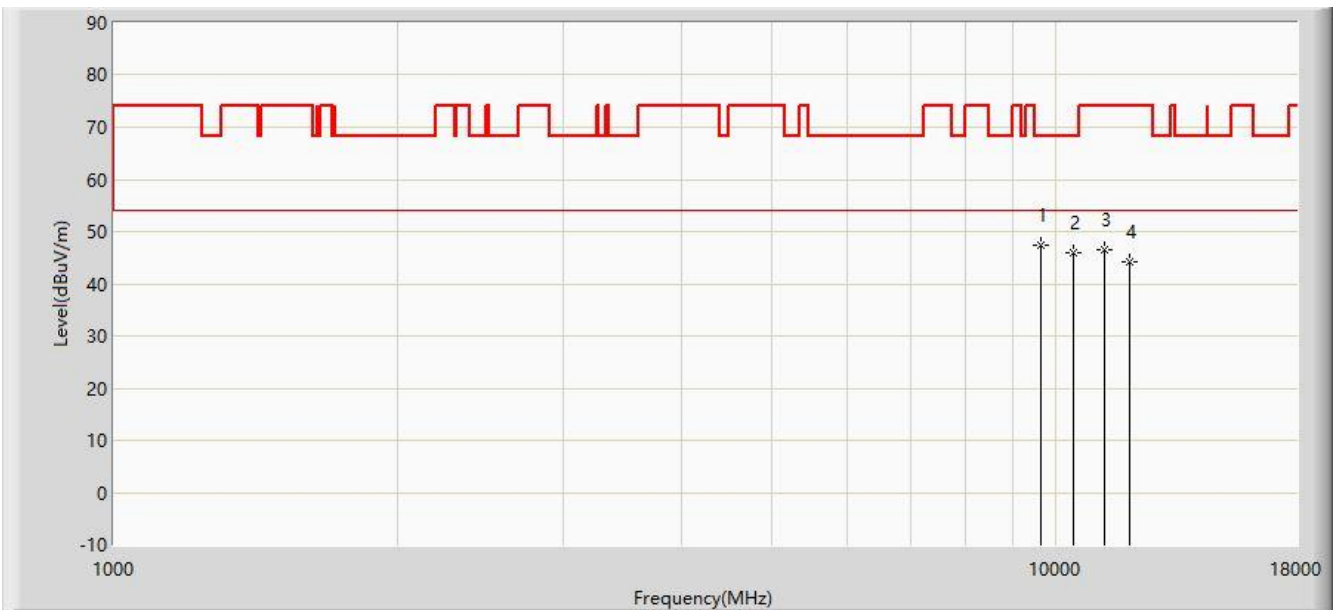


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.365	33.271	-20.835	68.200	14.094	PK
2			10443.500	45.949	29.261	-22.251	68.200	16.688	PK
3			11234.000	46.459	28.659	-27.541	74.000	17.800	PK
4			11948.000	44.289	26.445	-29.711	74.000	17.844	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1321	

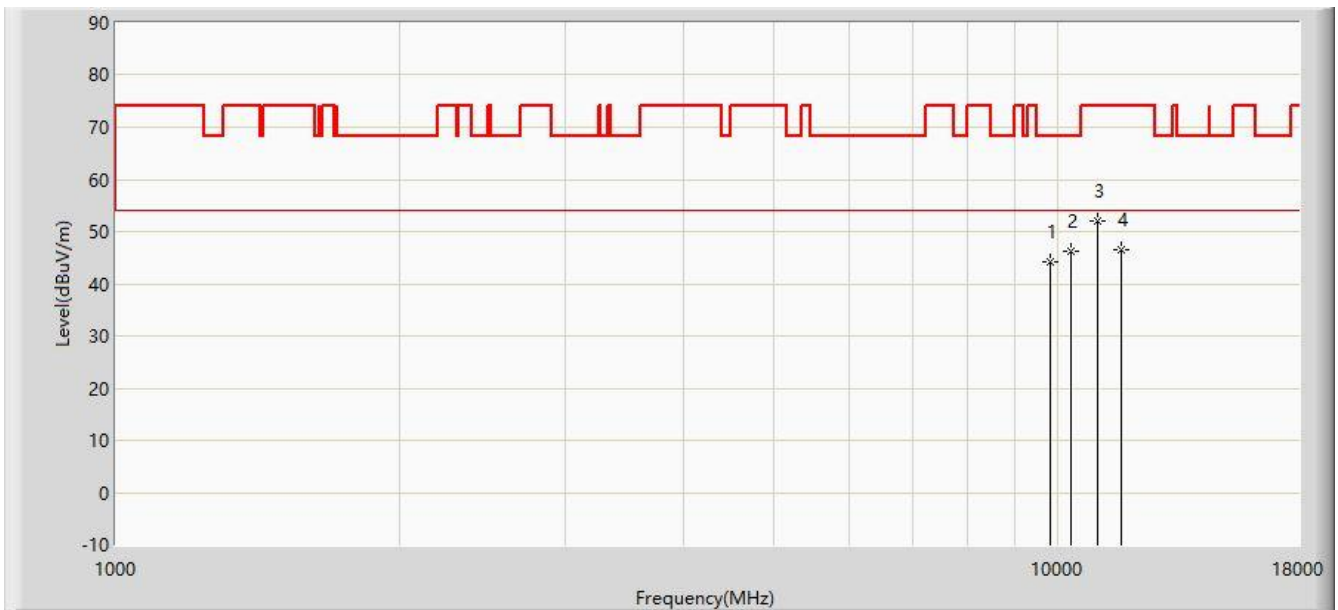


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	44.110	29.458	-24.090	68.200	14.652	PK
2		*	10333.000	46.189	29.856	-22.011	68.200	16.333	PK
3			10996.000	51.967	34.392	-22.033	74.000	17.575	PK
4			11659.000	46.471	28.494	-27.529	74.000	17.977	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1321	

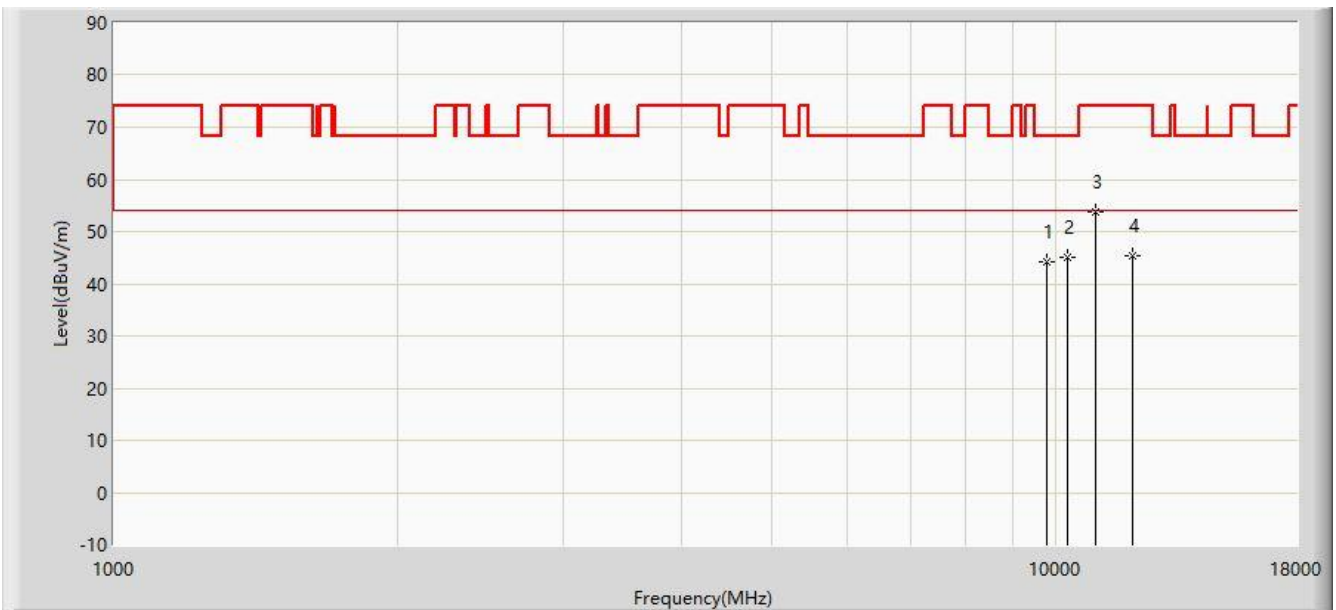


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	44.311	29.799	-23.889	68.200	14.512	PK
2			10273.500	44.986	28.846	-23.214	68.200	16.140	PK
3		*	10996.000	53.673	36.098	-20.327	74.000	17.575	PK
4			12058.500	45.387	27.569	-28.613	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5600MHz with OAW-AP1321	

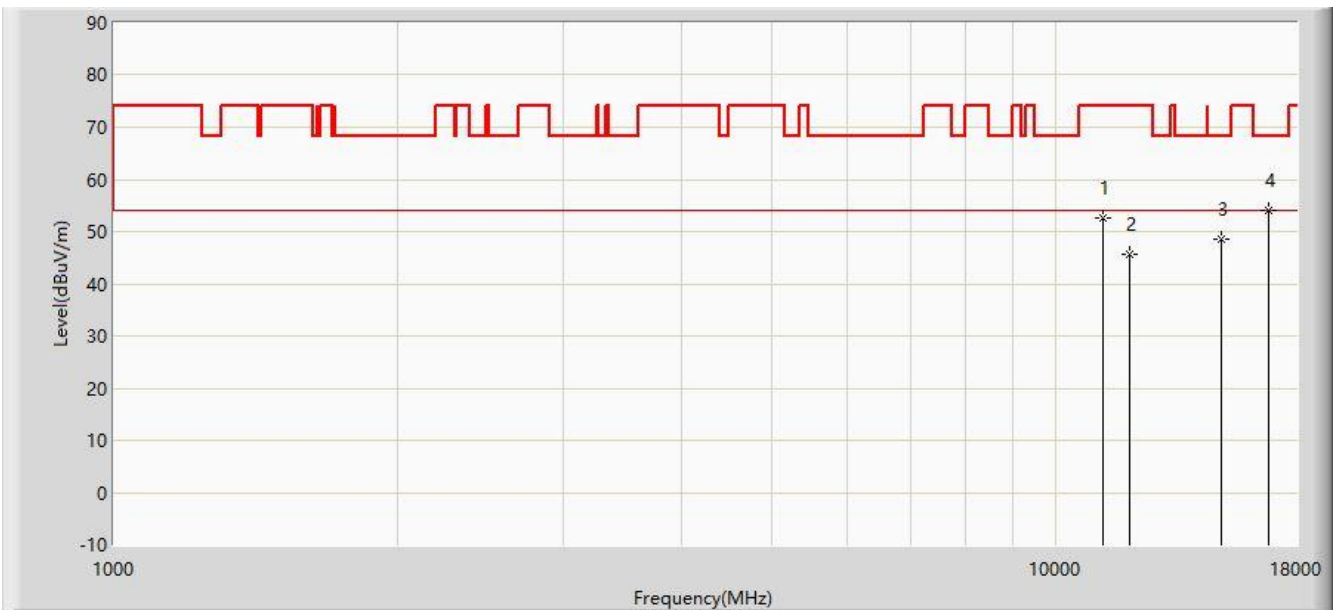


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	52.736	34.968	-21.264	74.000	17.768	PK
2			11948.000	45.608	27.764	-28.392	74.000	17.844	PK
3			14948.500	48.442	27.666	-19.758	68.200	20.776	PK
4		*	16801.500	54.200	30.100	-14.000	68.200	24.100	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5600MHz with OAW-AP1321	

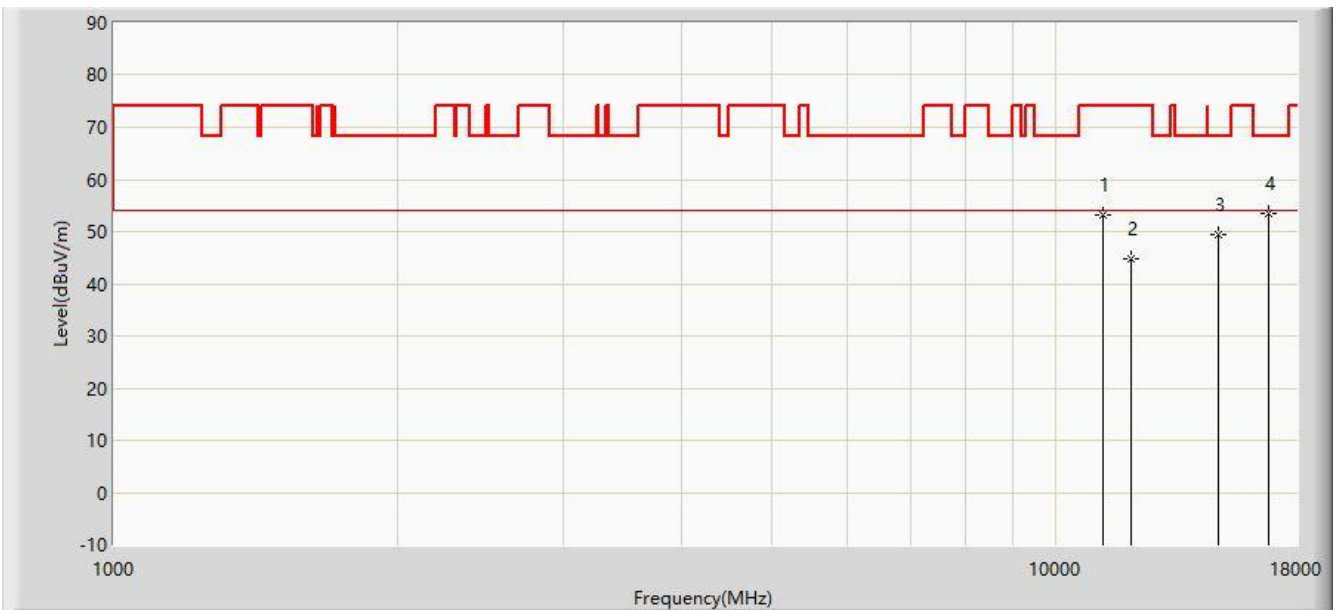


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	53.238	35.470	-20.762	74.000	17.768	PK
2			12007.500	44.806	26.987	-29.194	74.000	17.820	PK
3			14838.000	49.360	28.613	-18.840	68.200	20.747	PK
4		*	16801.500	53.550	29.450	-14.650	68.200	24.100	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz with OAW-AP1321	

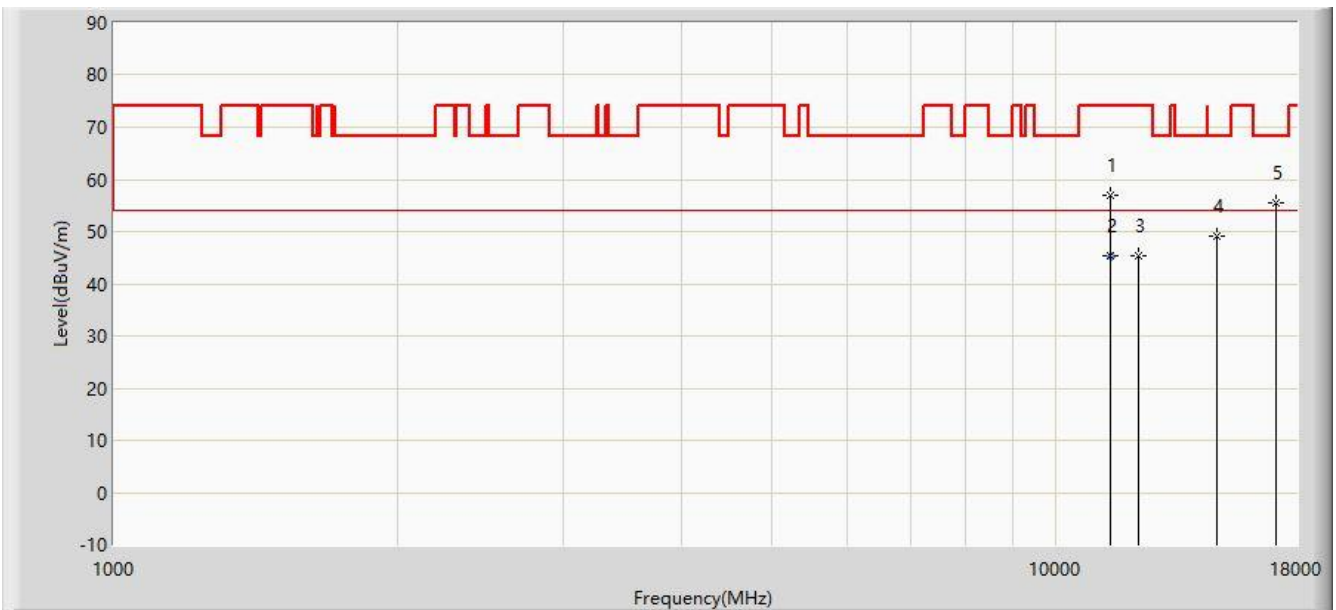


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11404.000	57.007	39.047	-16.993	74.000	17.960	PK
2		*	11406.000	45.260	27.298	-8.740	54.000	17.962	AV
3			12220.000	45.303	27.489	-28.697	74.000	17.814	PK
4			14804.000	49.111	28.374	-19.089	68.200	20.737	PK
5			17099.000	55.425	28.979	-12.775	68.200	26.446	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz with OAW-AP1321	

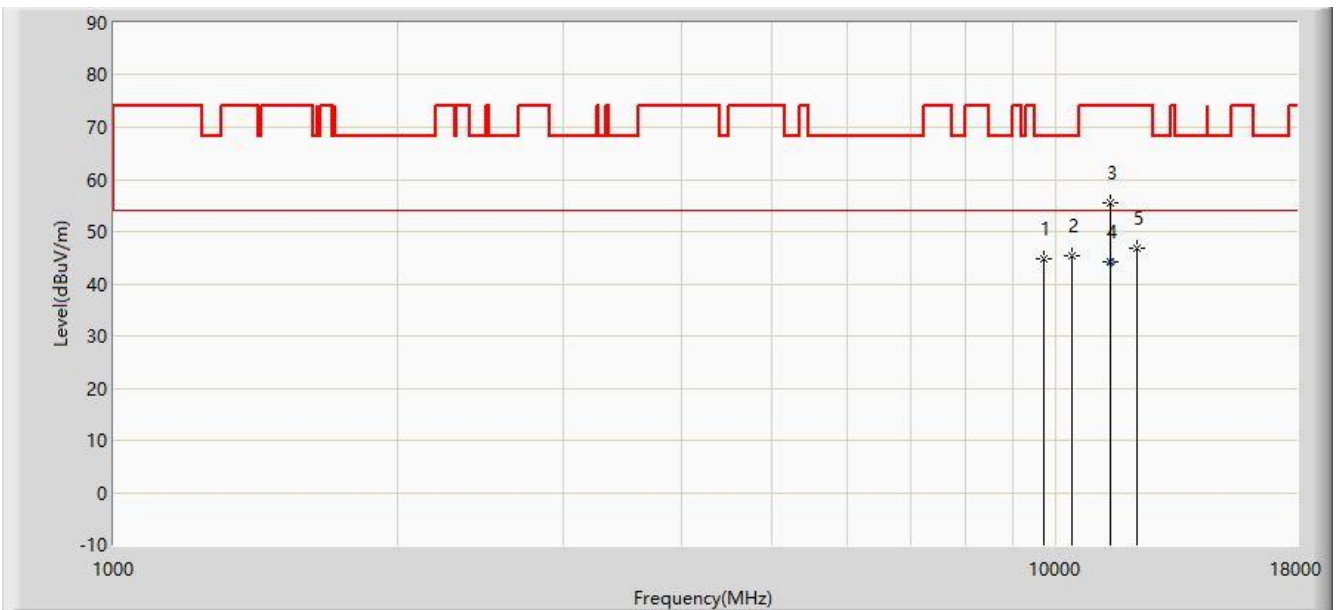


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9695.500	44.762	30.501	-23.438	68.200	14.261	PK
2			10401.000	45.228	28.677	-22.972	68.200	16.551	PK
3			11404.000	55.565	37.605	-18.435	74.000	17.960	PK
4		*	11405.200	44.194	26.233	-9.806	54.000	17.961	AV
5			12194.500	46.801	28.987	-27.199	74.000	17.814	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5720MHz with OAW-AP1321	

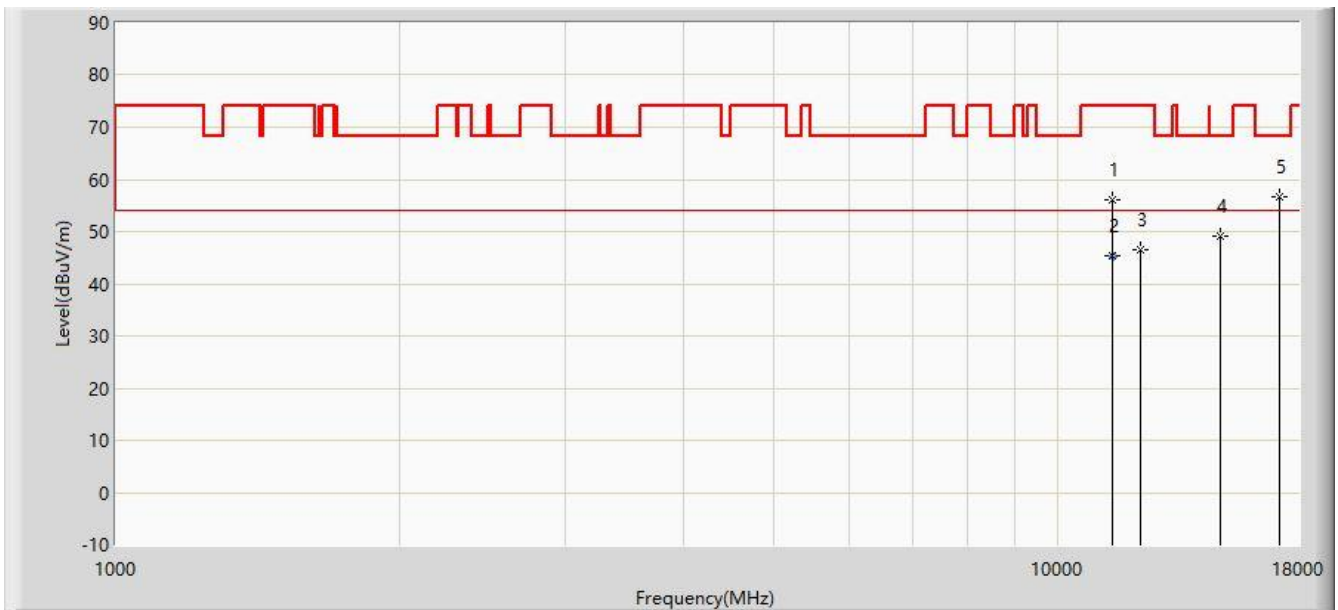


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11429.500	55.989	38.006	-18.011	74.000	17.984	PK
2		*	11430.000	45.454	27.470	-8.546	54.000	17.984	AV
3			12237.000	46.510	28.697	-27.490	74.000	17.813	PK
4			14863.500	49.267	28.514	-18.933	68.200	20.752	PK
5			17150.000	56.579	29.650	-11.621	68.200	26.929	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5720MHz with OAW-AP1321	

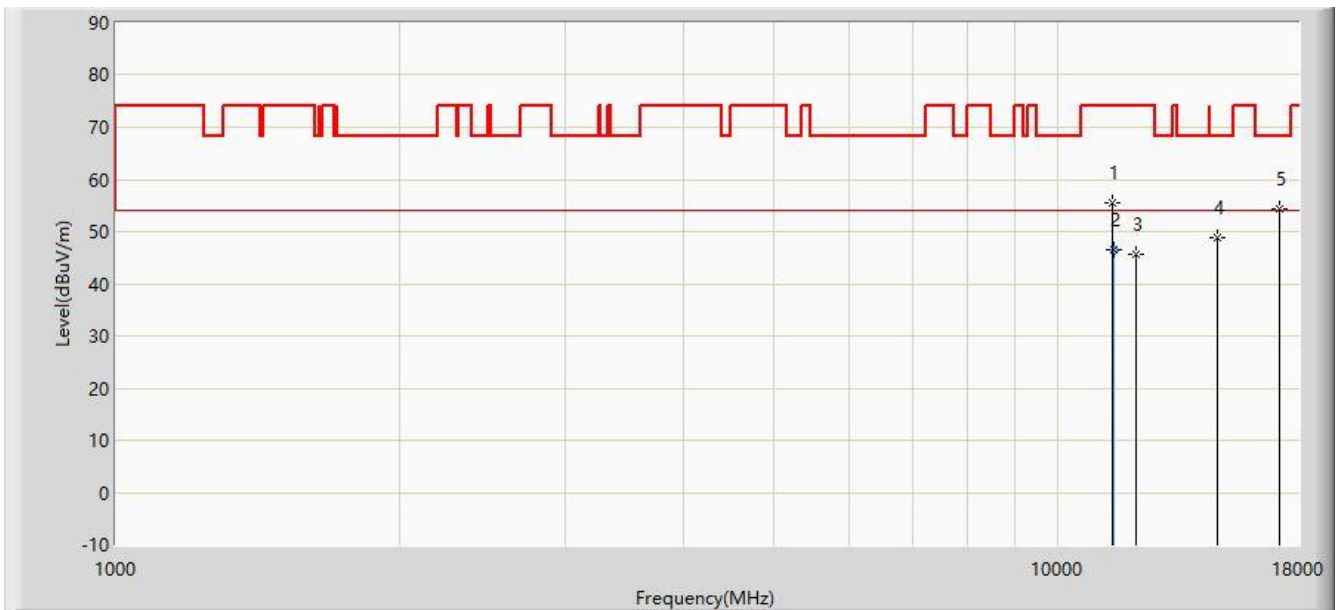


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11438.000	55.556	37.565	-18.444	74.000	17.991	PK
2		*	11440.000	46.546	28.553	-7.454	54.000	17.994	AV
3			12118.000	45.710	27.894	-28.290	74.000	17.816	PK
4			14778.500	48.703	27.973	-19.497	68.200	20.731	PK
5			17167.000	54.349	27.259	-13.851	68.200	27.090	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz with OAW-AP1321	

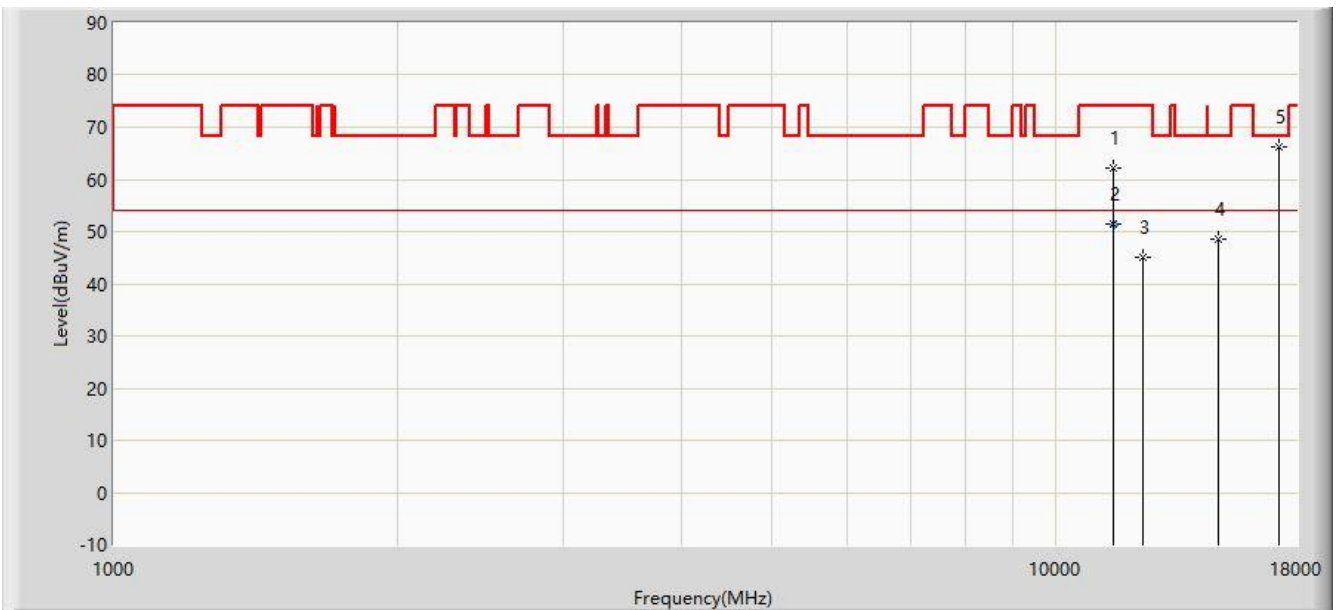


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	62.262	44.222	-11.738	74.000	18.040	PK
2			11490.000	51.445	33.405	-2.555	54.000	18.040	AV
3			12381.500	45.155	27.346	-28.845	74.000	17.808	PK
4			14889.000	48.458	27.699	-19.742	68.200	20.759	PK
5		*	17226.500	66.146	38.493	-2.054	68.200	27.653	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz with OAW-AP1321	

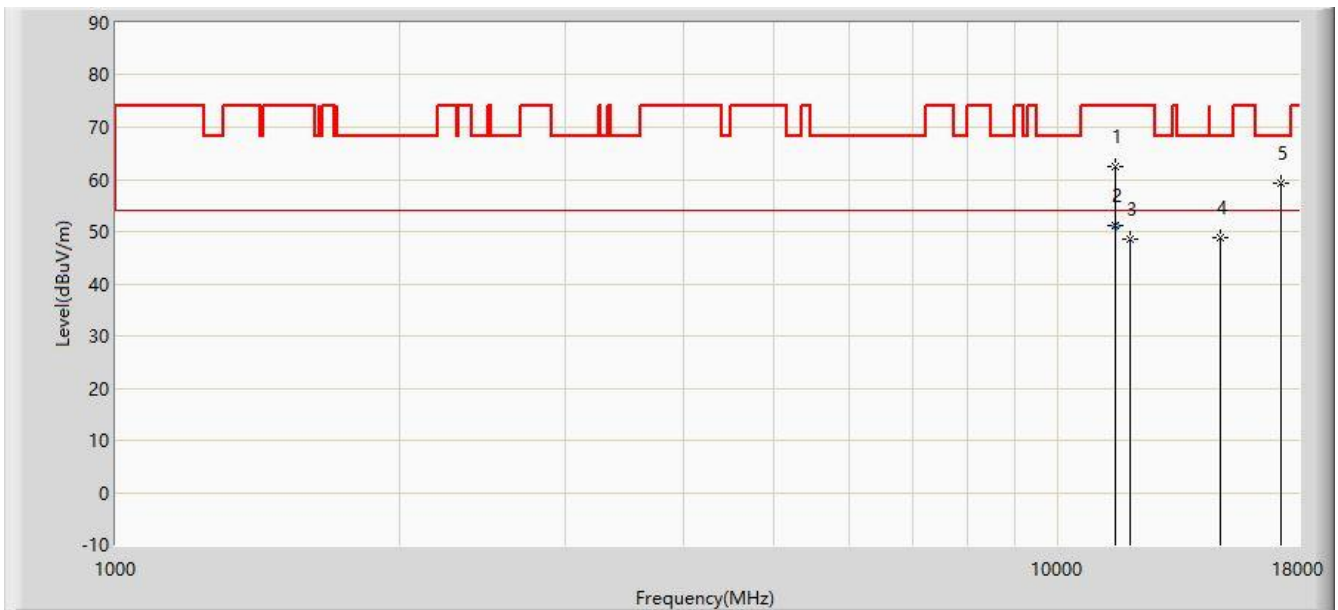


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11480.500	62.466	44.434	-11.534	74.000	18.031	PK
2		*	11481.300	51.050	33.018	-2.950	54.000	18.033	AV
3			11931.000	48.412	30.561	-25.588	74.000	17.851	PK
4			14855.000	48.933	28.182	-19.267	68.200	20.751	PK
5			17235.000	59.372	31.639	-8.828	68.200	27.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5785MHz with OAW-AP1321	

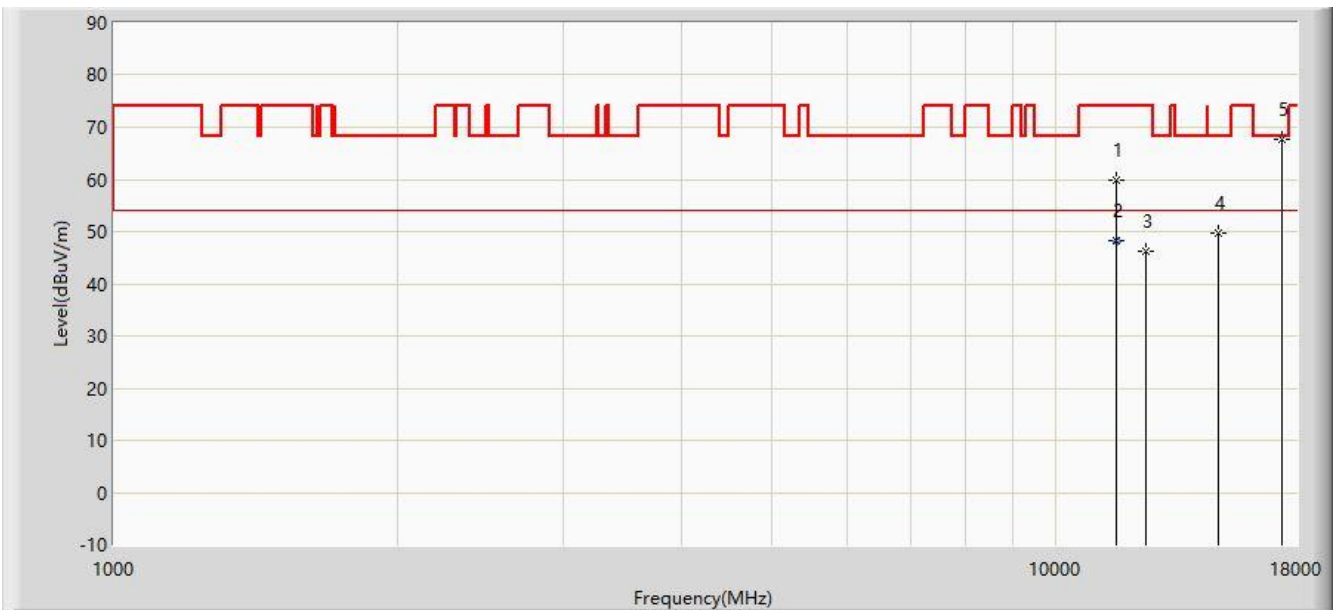


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11565.500	59.836	41.816	-14.164	74.000	18.020	PK
2			11567.300	48.228	30.209	-5.772	54.000	18.018	AV
3			12458.000	46.118	28.312	-27.882	74.000	17.806	PK
4			14863.500	49.732	28.979	-18.468	68.200	20.752	PK
5		*	17354.000	67.591	38.733	-0.609	68.200	28.858	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5785MHz with OAW-AP1321	

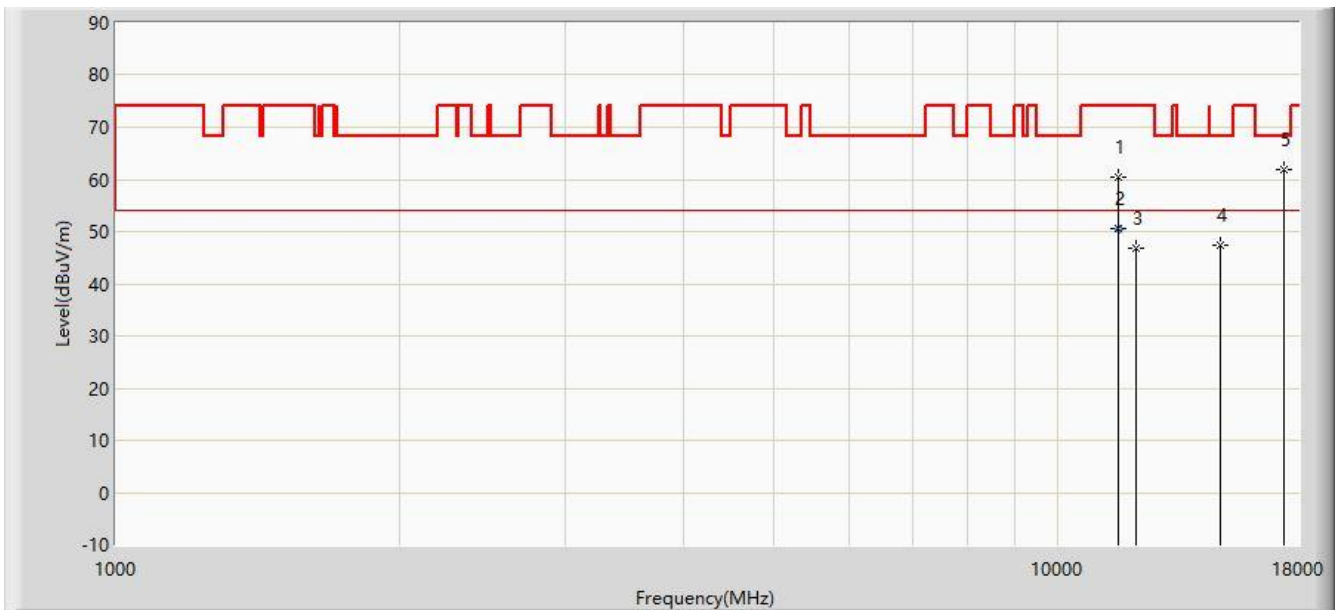


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11565.500	60.394	42.374	-13.606	74.000	18.020	PK
2		*	11568.400	50.670	32.652	-3.330	54.000	18.019	AV
3			12092.500	46.897	29.080	-27.103	74.000	17.818	PK
4			14880.500	47.317	26.560	-20.883	68.200	20.758	PK
5			17354.000	62.012	33.154	-6.188	68.200	28.858	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz with OAW-AP1321	

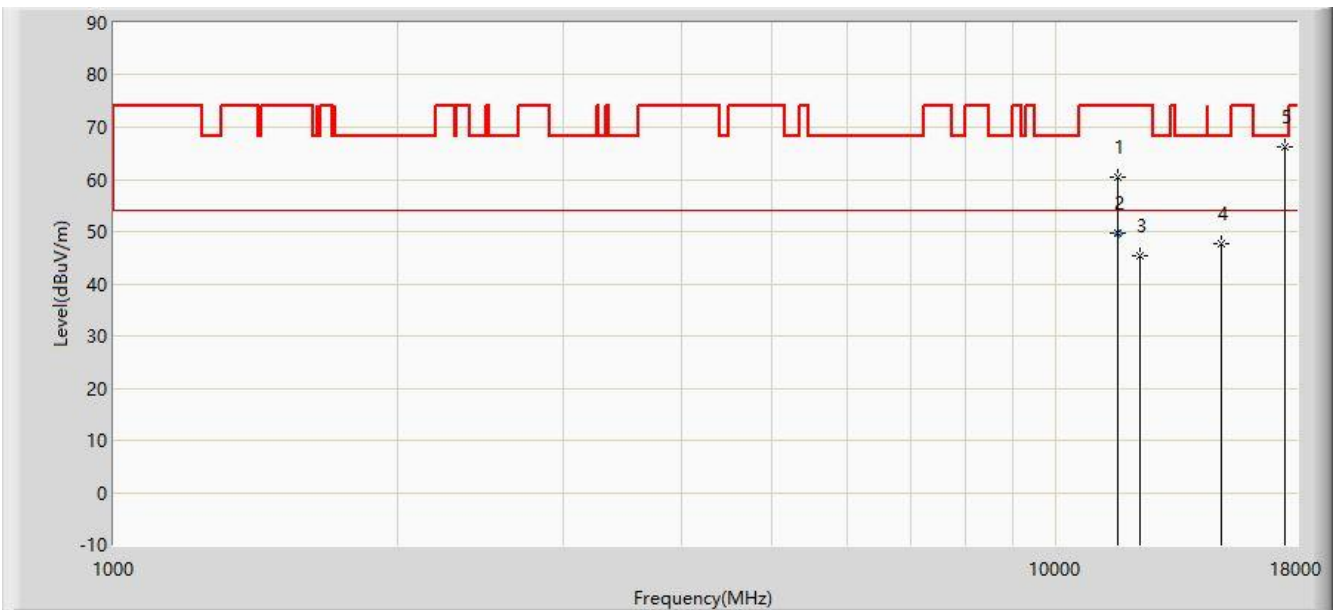


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11642.000	60.510	42.525	-13.490	74.000	17.985	PK
2			11645.200	49.769	31.786	-4.231	54.000	17.983	AV
3			12279.500	45.240	27.429	-28.760	74.000	17.810	PK
4			14957.000	47.543	26.765	-20.657	68.200	20.778	PK
5		*	17490.000	66.226	36.081	-1.974	68.200	30.145	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz with OAW-AP1321	

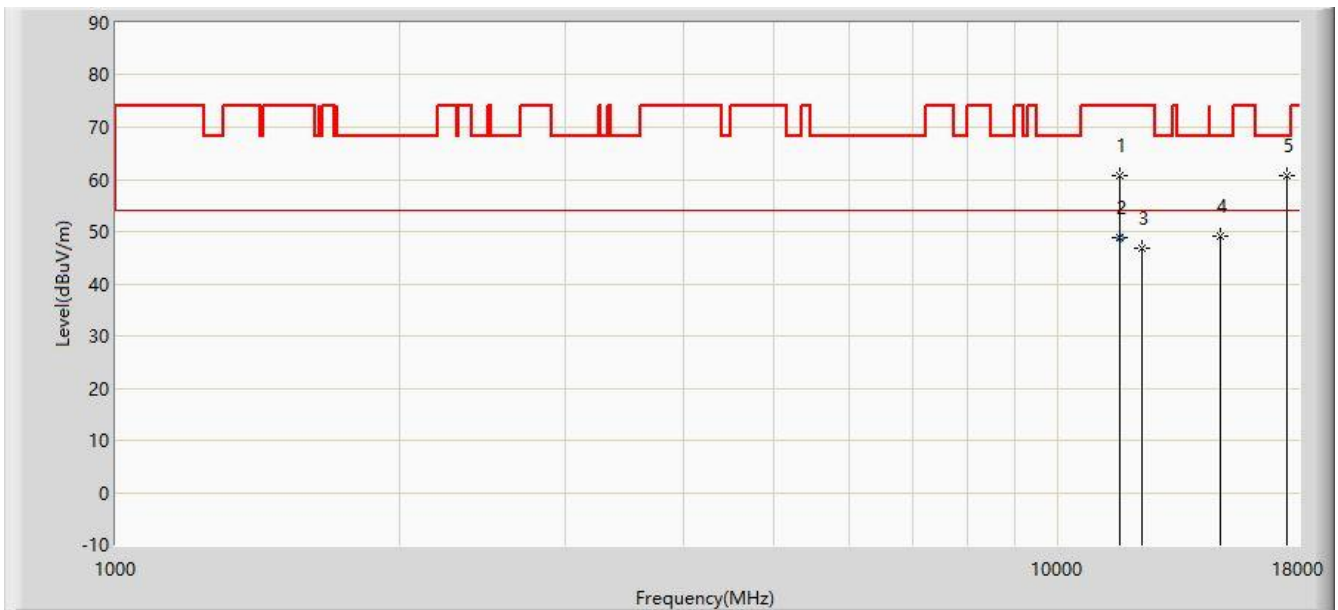


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11642.000	60.730	42.745	-13.270	74.000	17.985	PK
2		*	11645.100	48.738	30.755	-5.262	54.000	17.983	AV
3			12254.000	46.872	29.059	-27.128	74.000	17.813	PK
4			14846.500	49.111	28.362	-19.089	68.200	20.749	PK
5			17490.000	60.769	30.624	-7.431	68.200	30.145	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1321	

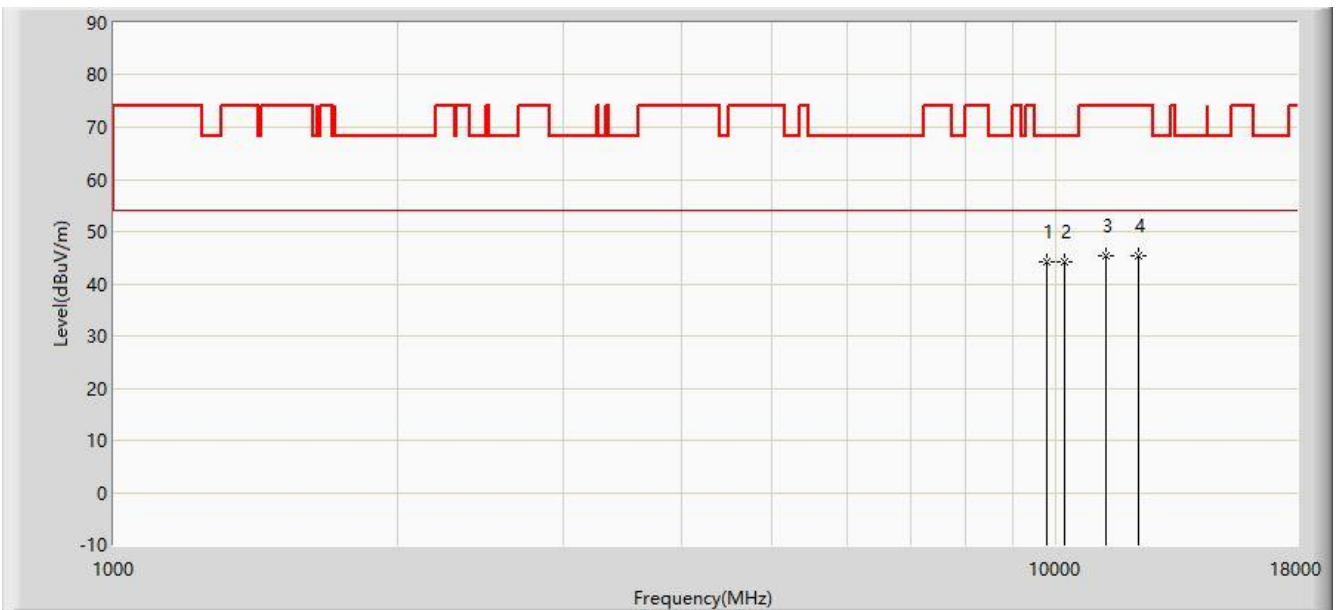


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9772.000	44.231	29.719	-23.969	68.200	14.512	PK
2			10222.500	44.161	28.184	-24.039	68.200	15.976	PK
3			11302.000	45.454	27.590	-28.546	74.000	17.864	PK
4			12220.000	45.363	27.549	-28.637	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1321	

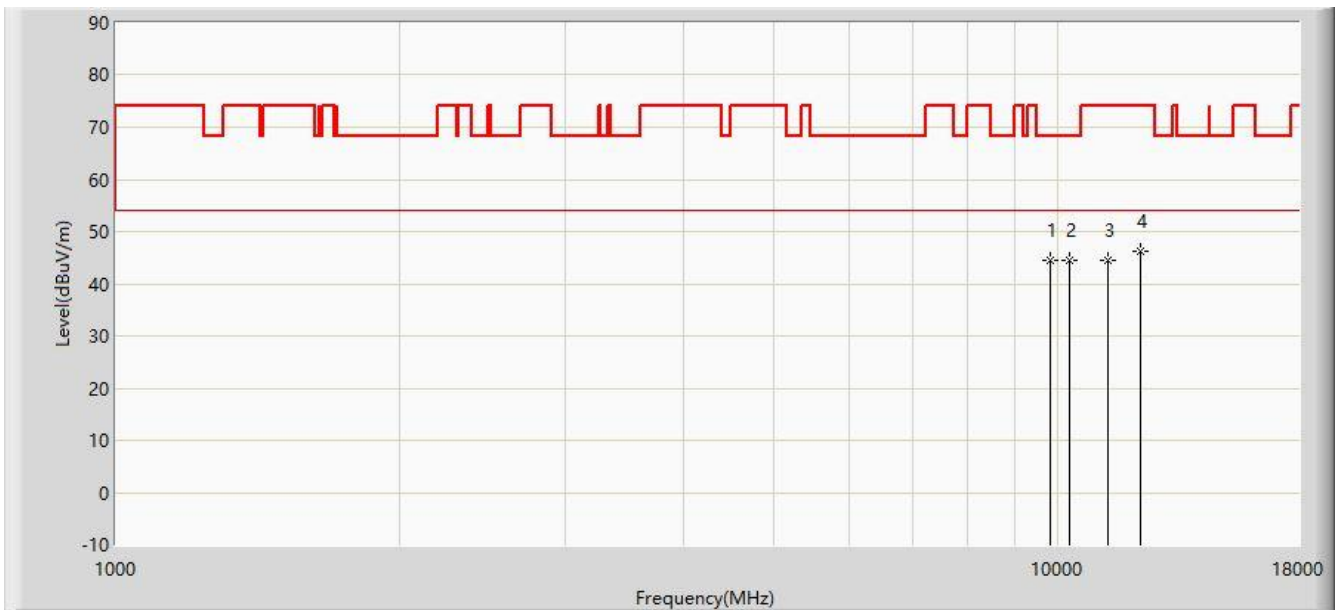


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9814.500	44.621	29.969	-23.579	68.200	14.652	PK
2			10265.000	44.433	28.320	-23.767	68.200	16.113	PK
3			11276.500	44.437	26.597	-29.563	74.000	17.840	PK
4			12220.000	46.095	28.281	-27.905	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5230MHz with OAW-AP1321	

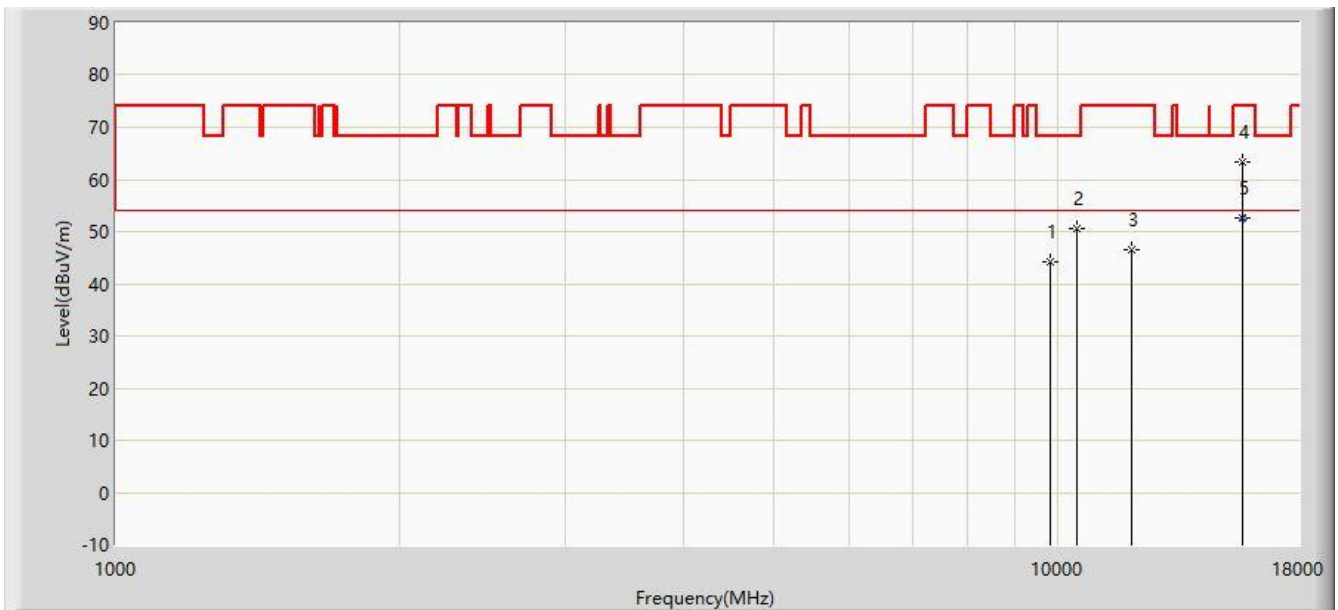


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	44.285	29.633	-23.915	68.200	14.652	PK
2			10452.000	50.654	33.939	-17.546	68.200	16.715	PK
3			11948.000	46.433	28.589	-27.567	74.000	17.844	PK
4			15688.000	63.315	42.530	-10.685	74.000	20.785	PK
5		*	15690.000	52.615	31.832	-1.385	54.000	20.783	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5230MHz with OAW-AP1321	

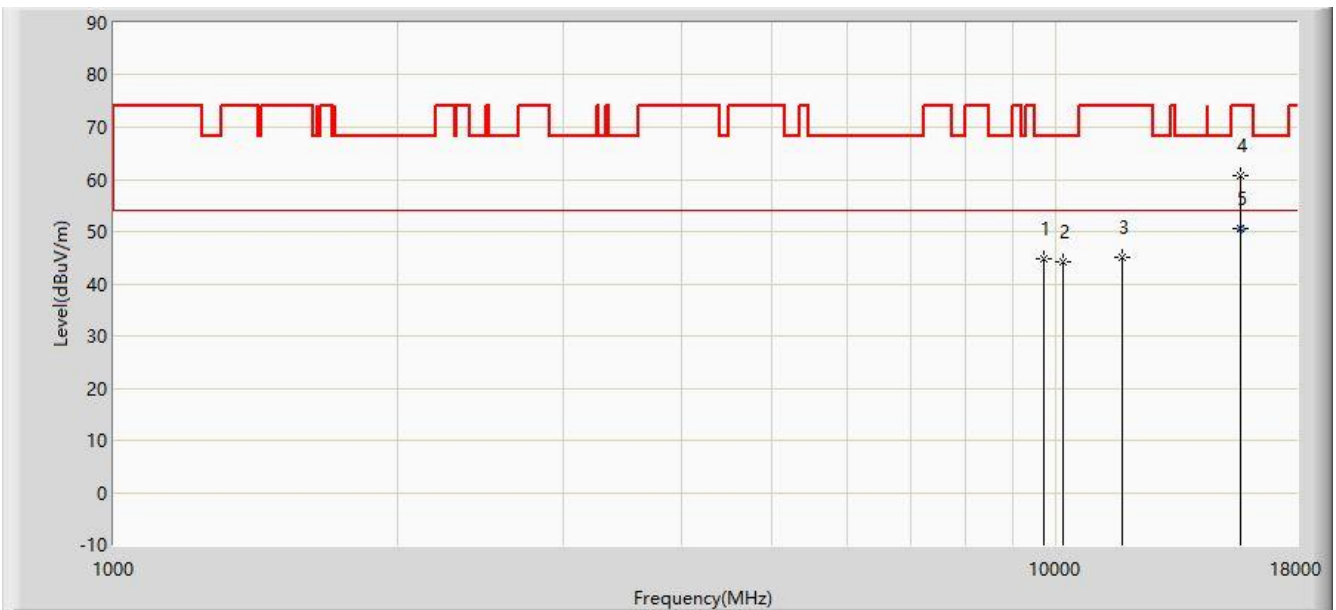


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9695.500	44.906	30.645	-23.294	68.200	14.261	PK
2			10171.500	44.284	28.472	-23.916	68.200	15.812	PK
3			11735.500	45.198	27.257	-28.802	74.000	17.941	PK
4			15671.000	60.791	39.992	-13.209	74.000	20.799	PK
5		*	15675.000	50.512	29.716	-3.488	54.000	20.796	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5270MHz with OAW-AP1321	

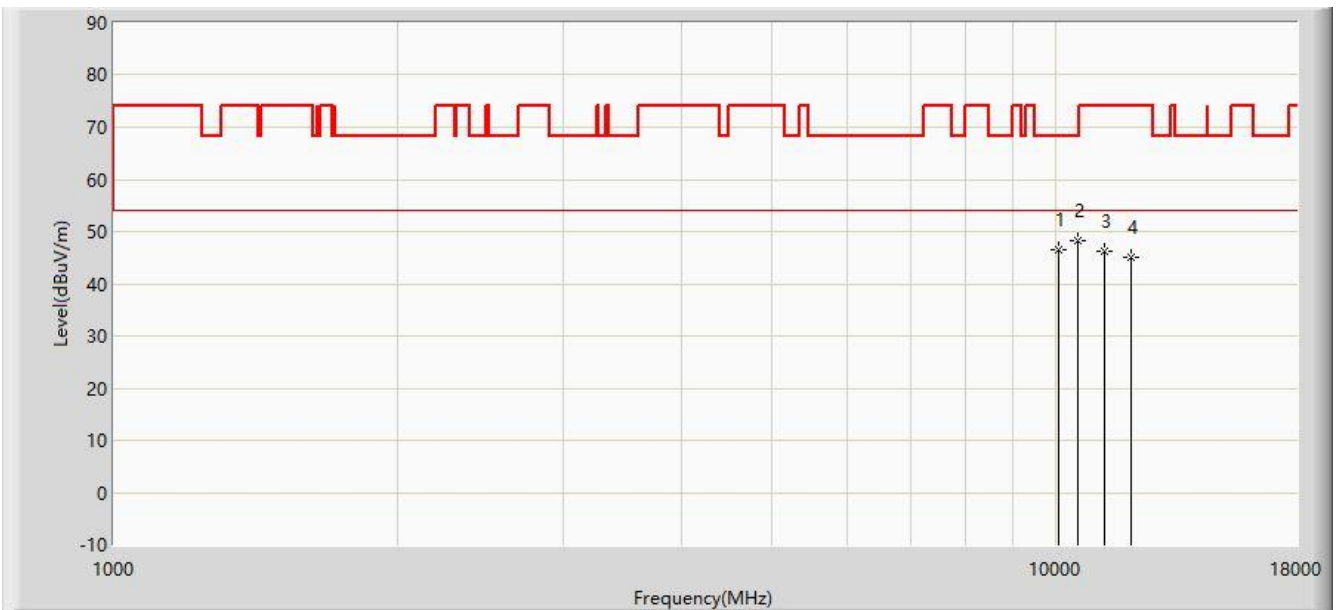


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10044.000	46.423	31.022	-21.777	68.200	15.401	PK
2		*	10537.000	48.315	31.392	-19.885	68.200	16.923	PK
3			11242.500	46.128	28.320	-27.872	74.000	17.807	PK
4			12007.500	45.138	27.319	-28.862	74.000	17.820	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5270MHz with OAW-AP1321	

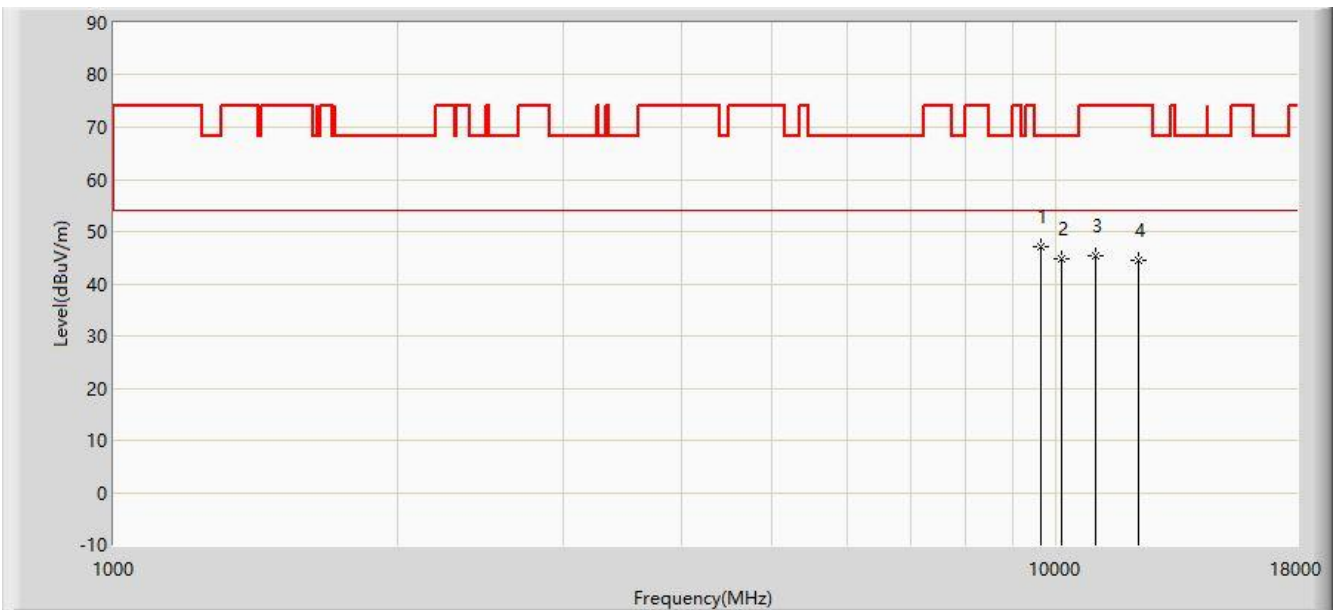


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.088	32.994	-21.112	68.200	14.094	PK
2			10129.000	44.874	29.199	-23.326	68.200	15.675	PK
3			11021.500	45.300	27.700	-28.700	74.000	17.600	PK
4			12228.500	44.635	26.821	-29.365	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1321	

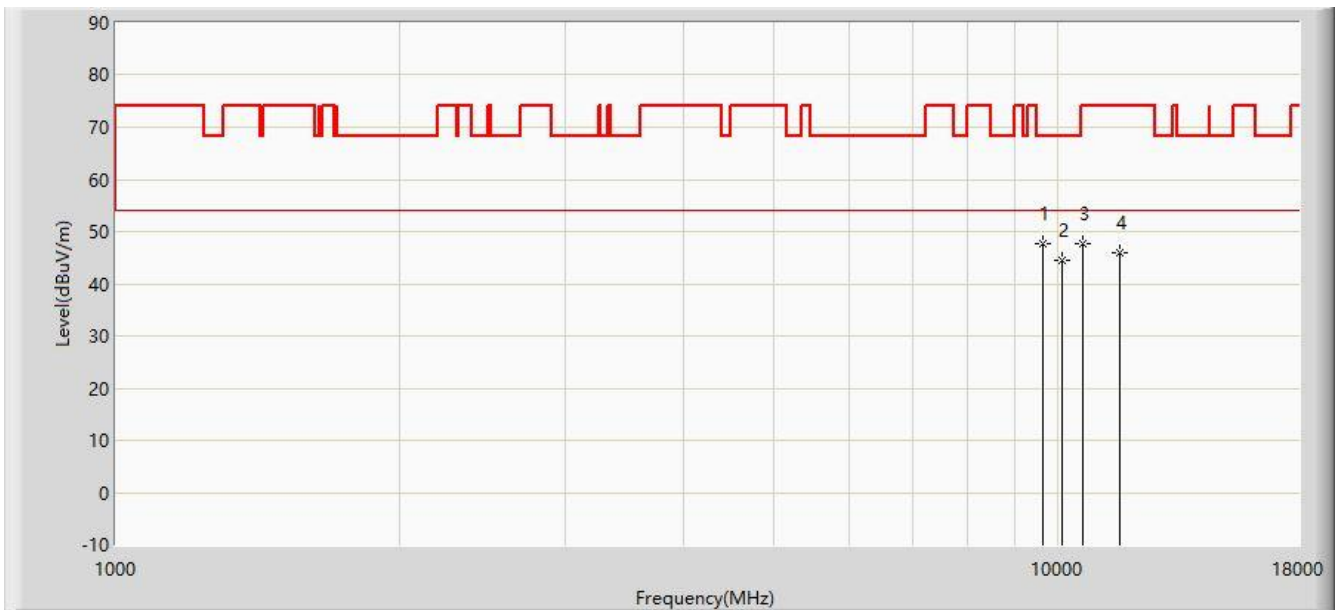


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.545	33.451	-20.655	68.200	14.094	PK
2			10086.500	44.599	29.060	-23.601	68.200	15.539	PK
3			10622.000	47.759	30.716	-26.241	74.000	17.043	PK
4			11633.500	45.891	27.902	-28.109	74.000	17.989	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1321	

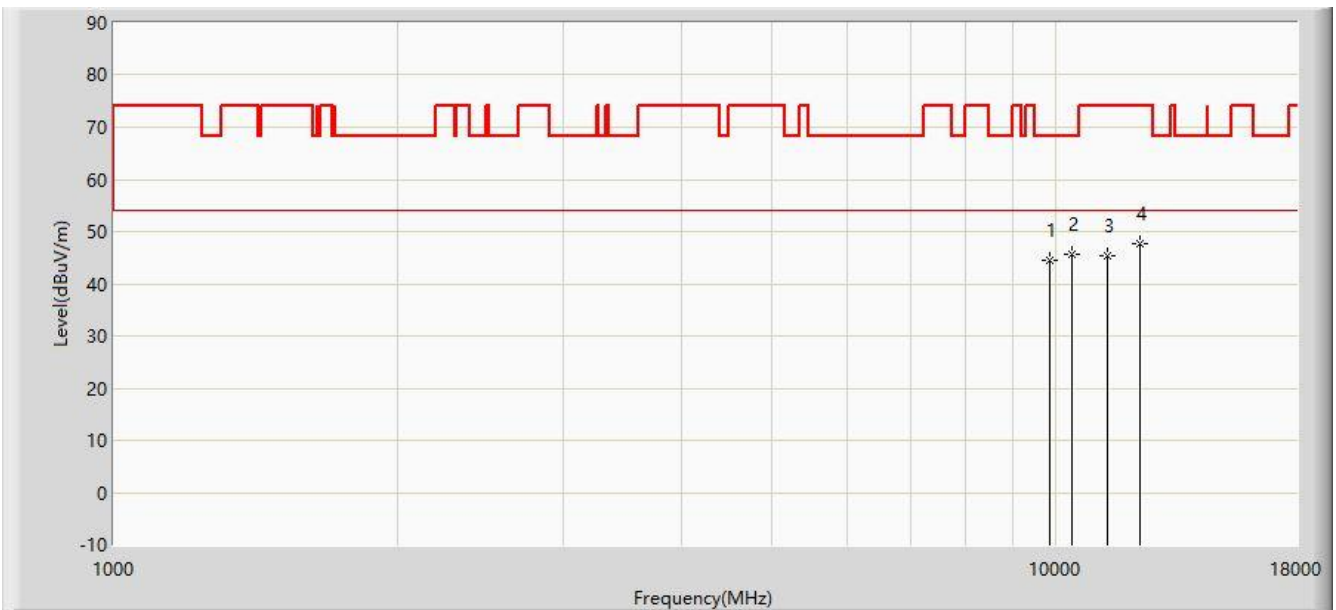


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	44.449	29.659	-23.751	68.200	14.790	PK
2		*	10401.000	45.680	29.129	-22.520	68.200	16.551	PK
3			11327.500	45.379	27.491	-28.621	74.000	17.889	PK
4			12254.000	47.706	29.893	-26.294	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1321	

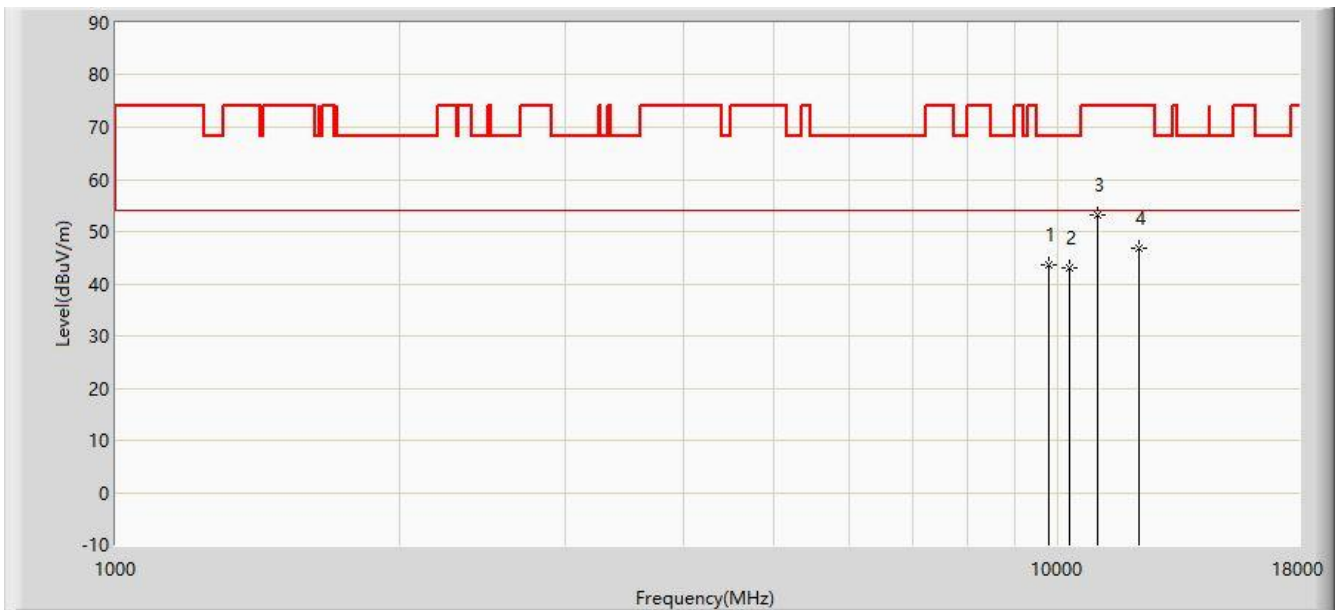


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9780.500	43.534	28.994	-24.666	68.200	14.540	PK
2			10265.000	43.160	27.047	-25.040	68.200	16.113	PK
3		*	11021.500	53.324	35.724	-20.676	74.000	17.600	PK
4			12177.500	46.704	28.889	-27.296	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1321	

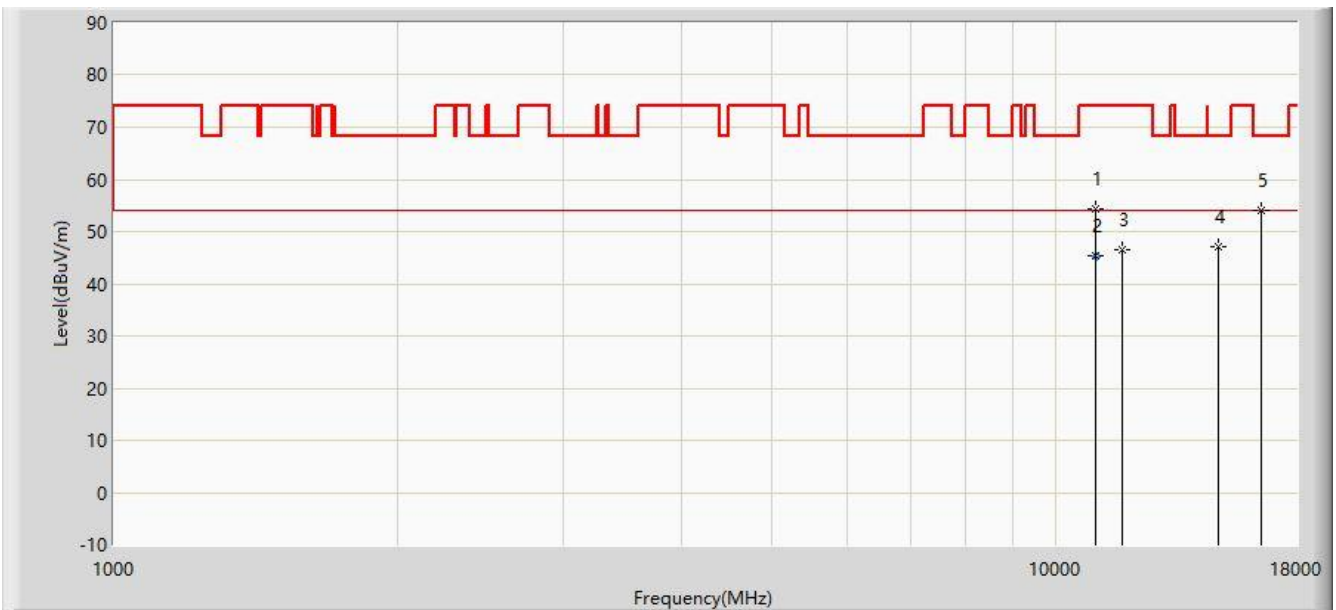


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11021.500	54.281	36.681	-19.719	74.000	17.600	PK
2		*	11024.000	45.332	27.729	-8.668	54.000	17.603	AV
3			11761.000	46.536	28.606	-27.464	74.000	17.930	PK
4			14880.500	47.210	26.453	-20.990	68.200	20.758	PK
5			16529.500	53.938	31.769	-14.262	68.200	22.169	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5590MHz with OAW-AP1321	

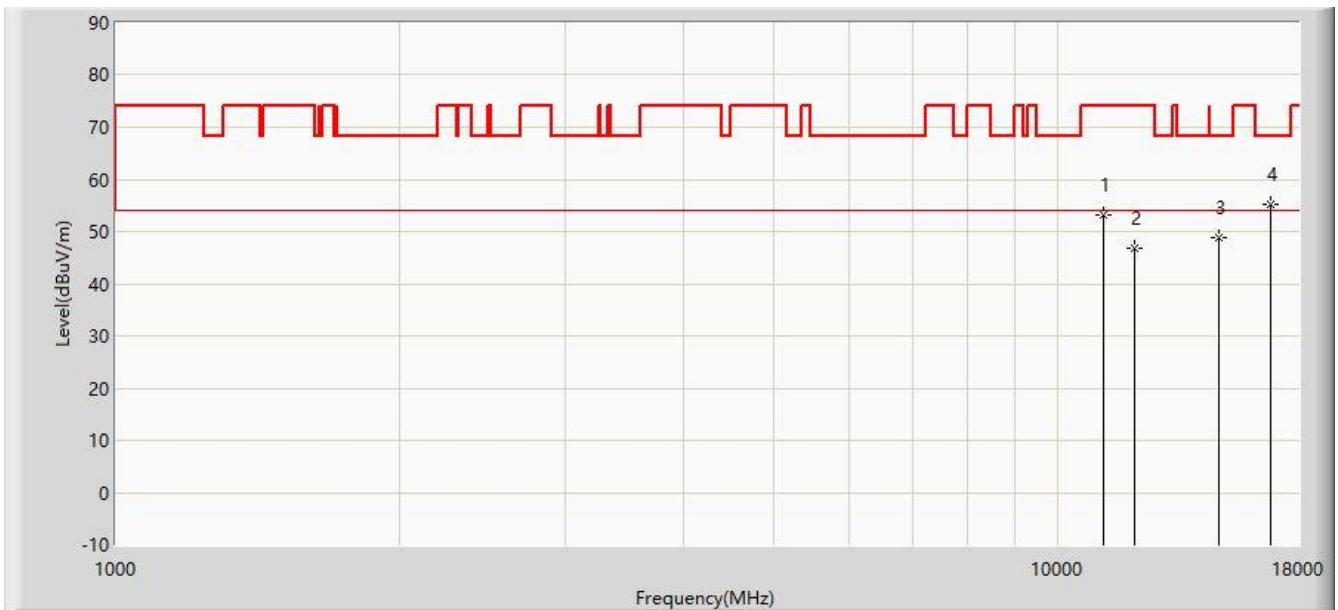


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11183.000	53.328	35.576	-20.672	74.000	17.752	PK
2			12067.000	46.685	28.867	-27.315	74.000	17.818	PK
3			14812.500	48.700	27.960	-19.500	68.200	20.739	PK
4		*	16784.500	55.286	31.306	-12.914	68.200	23.979	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5590MHz with OAW-AP1321	

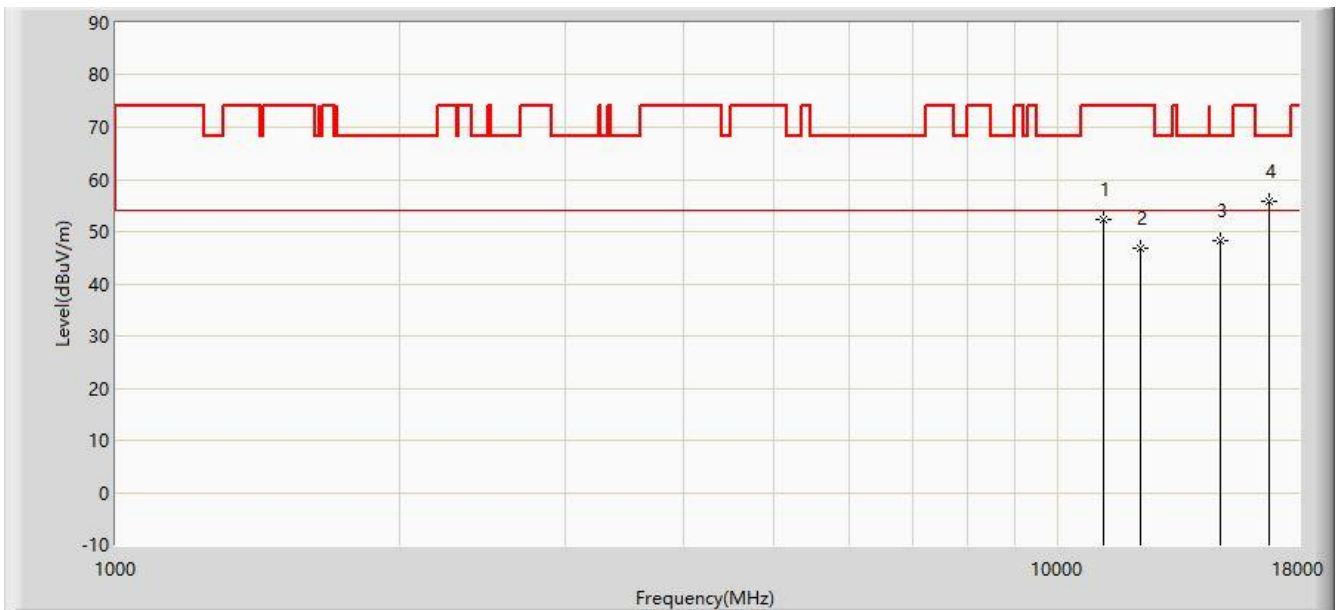


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11183.000	52.426	34.674	-21.574	74.000	17.752	PK
2			12211.500	46.928	29.114	-27.072	74.000	17.814	PK
3			14880.500	48.122	27.365	-20.078	68.200	20.758	PK
4		*	16767.500	55.895	32.035	-12.305	68.200	23.859	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz with OAW-AP1321	

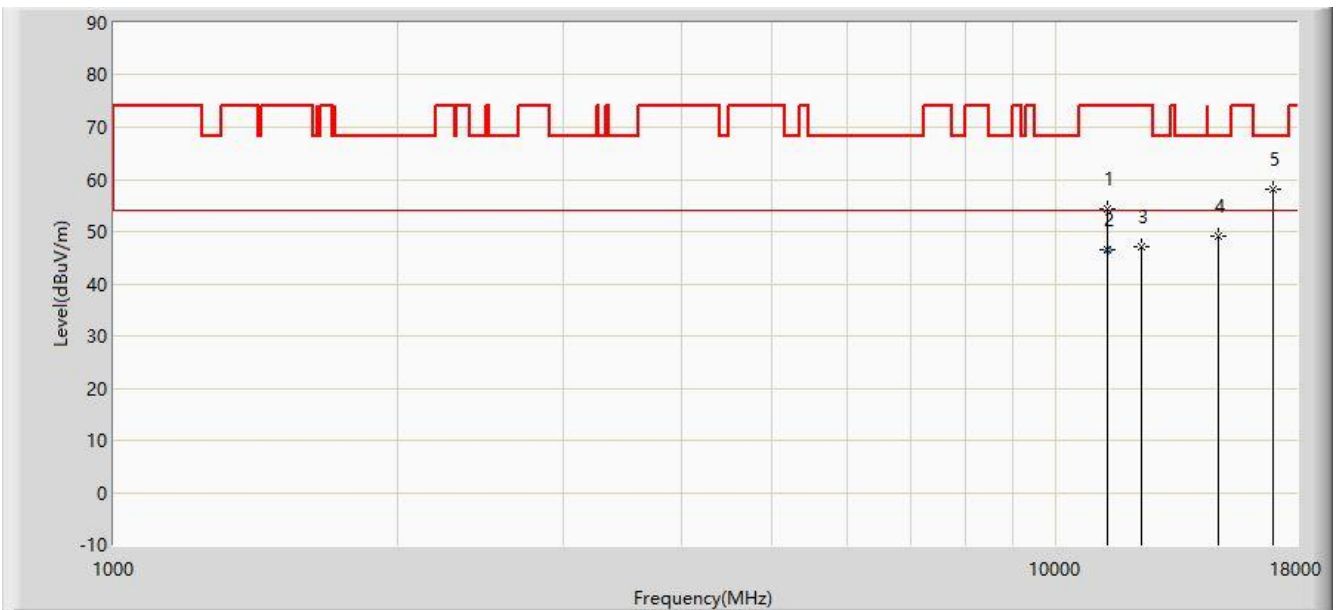


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11336.000	54.331	36.435	-19.669	74.000	17.896	PK
2		*	11339.000	46.537	28.638	-7.463	54.000	17.898	AV
3			12330.500	46.959	29.149	-27.041	74.000	17.810	PK
4			14846.500	49.231	28.482	-18.969	68.200	20.749	PK
5			17014.000	57.989	32.347	-10.211	68.200	25.642	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz with OAW-AP1321	

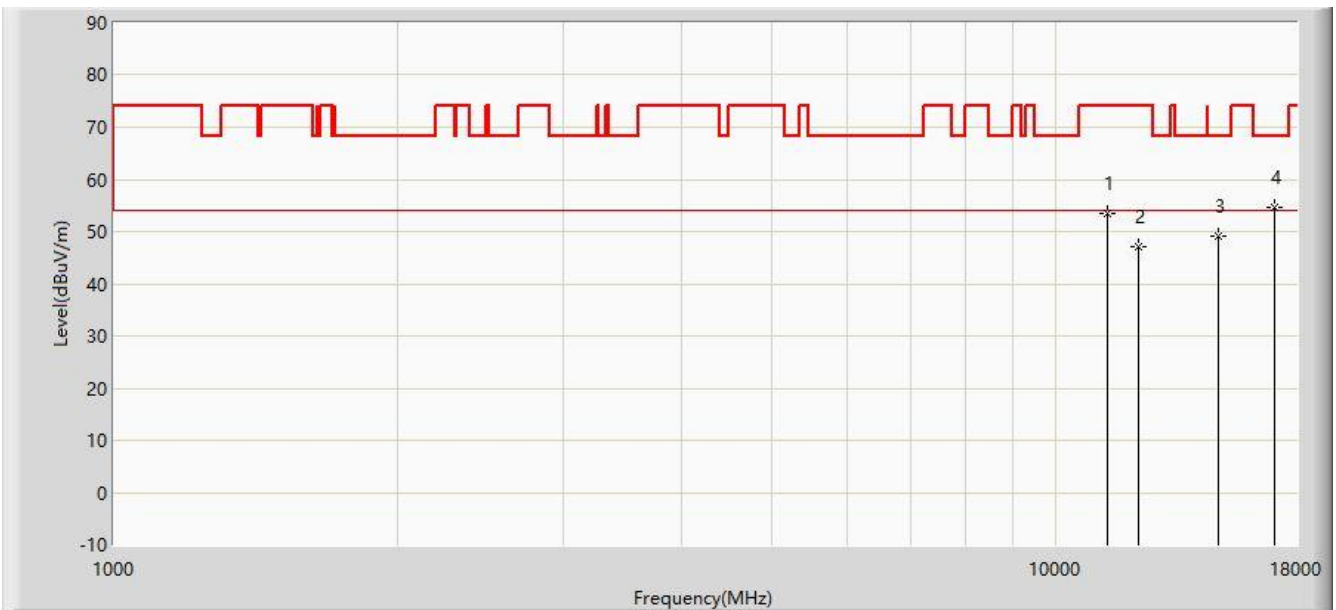


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11353.000	53.603	35.692	-20.397	74.000	17.911	PK
2			12237.000	46.999	29.186	-27.001	74.000	17.813	PK
3			14880.500	49.032	28.275	-19.168	68.200	20.758	PK
4		*	17022.500	54.679	28.956	-13.521	68.200	25.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz with OAW-AP1321	

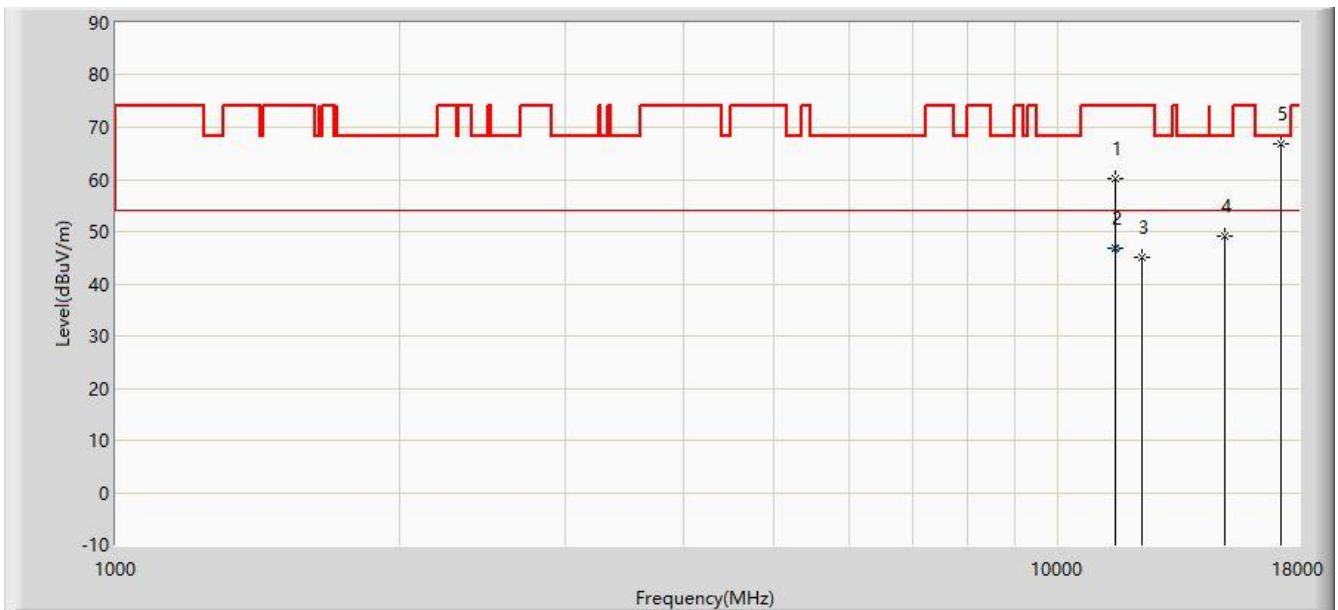


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11506.000	60.038	41.991	-13.962	74.000	18.047	PK
2			11509.600	46.903	28.857	-7.097	54.000	18.045	AV
3			12271.000	44.934	27.123	-29.066	74.000	17.811	PK
4			15016.500	49.183	28.388	-19.017	68.200	20.795	PK
5		*	17252.000	66.691	38.798	-1.509	68.200	27.893	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz with OAW-AP1321	

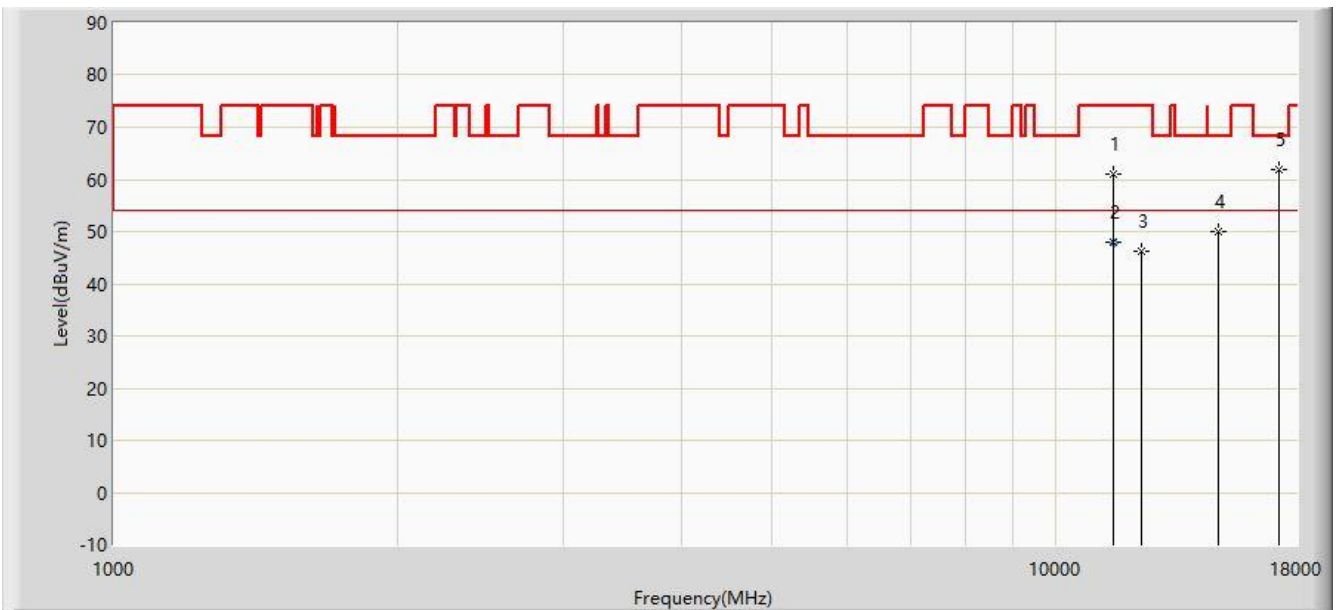


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11506.000	60.905	42.858	-13.095	74.000	18.047	PK
2		*	11510.100	47.952	29.907	-6.048	54.000	18.045	AV
3			12339.000	46.105	28.295	-27.895	74.000	17.810	PK
4			14855.000	50.013	29.262	-18.187	68.200	20.751	PK
5			17252.000	61.884	33.991	-6.316	68.200	27.893	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz with OAW-AP1321	

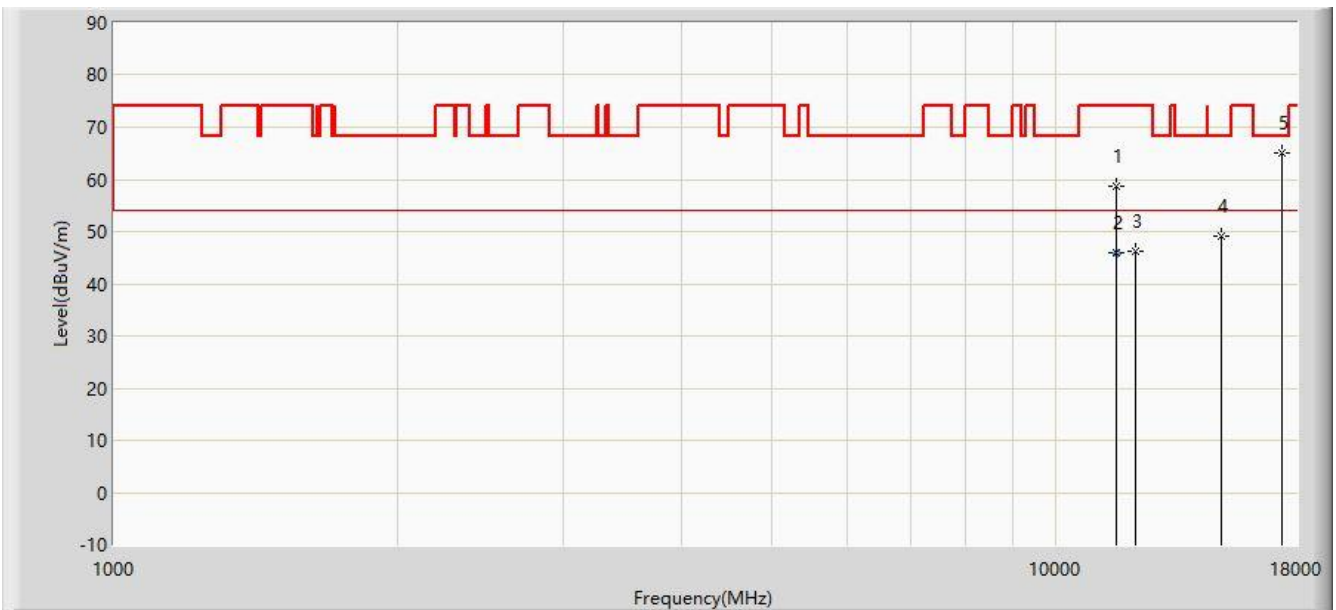


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11582.500	58.683	40.671	-15.317	74.000	18.012	PK
2			11585.300	45.819	27.808	-8.181	54.000	18.011	AV
3			12160.500	46.262	28.446	-27.738	74.000	17.816	PK
4			14948.500	49.236	28.460	-18.964	68.200	20.776	PK
5		*	17362.500	65.105	36.166	-3.095	68.200	28.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz with OAW-AP1321	

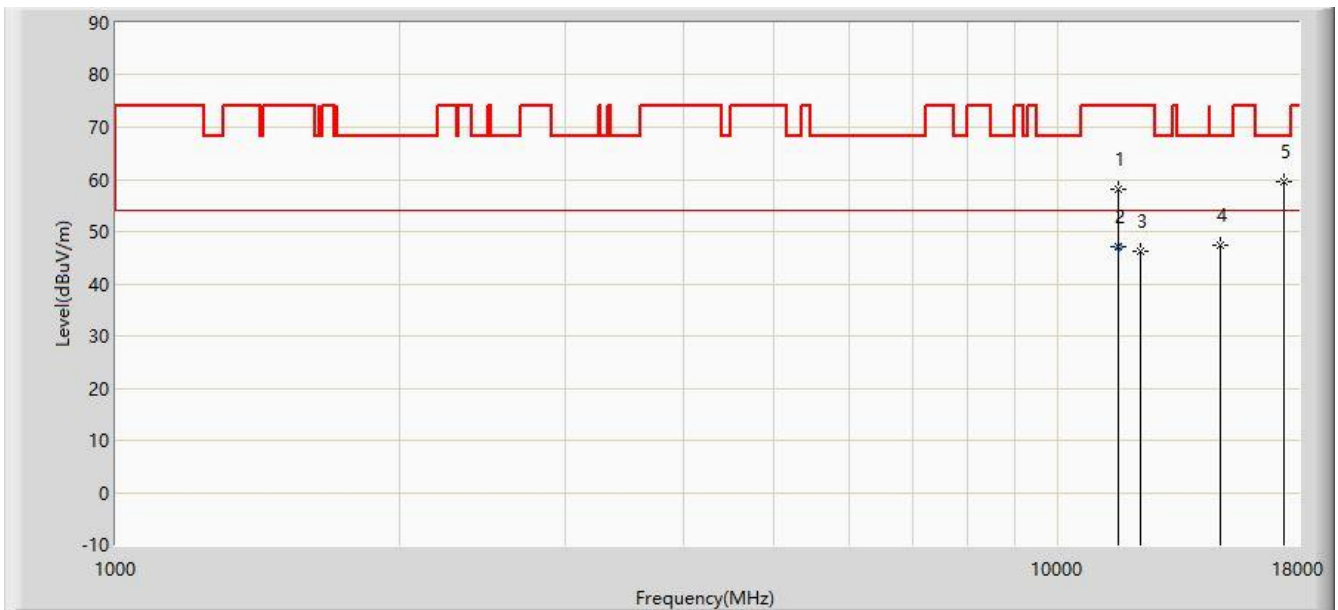


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11582.500	57.994	39.982	-16.006	74.000	18.012	PK
2		*	11593.000	46.974	28.967	-7.026	54.000	18.007	AV
3			12211.500	46.252	28.438	-27.748	74.000	17.814	PK
4			14880.500	47.423	26.666	-20.777	68.200	20.758	PK
5			17379.500	59.595	30.494	-8.605	68.200	29.101	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5710MHz with OAW-AP1321	

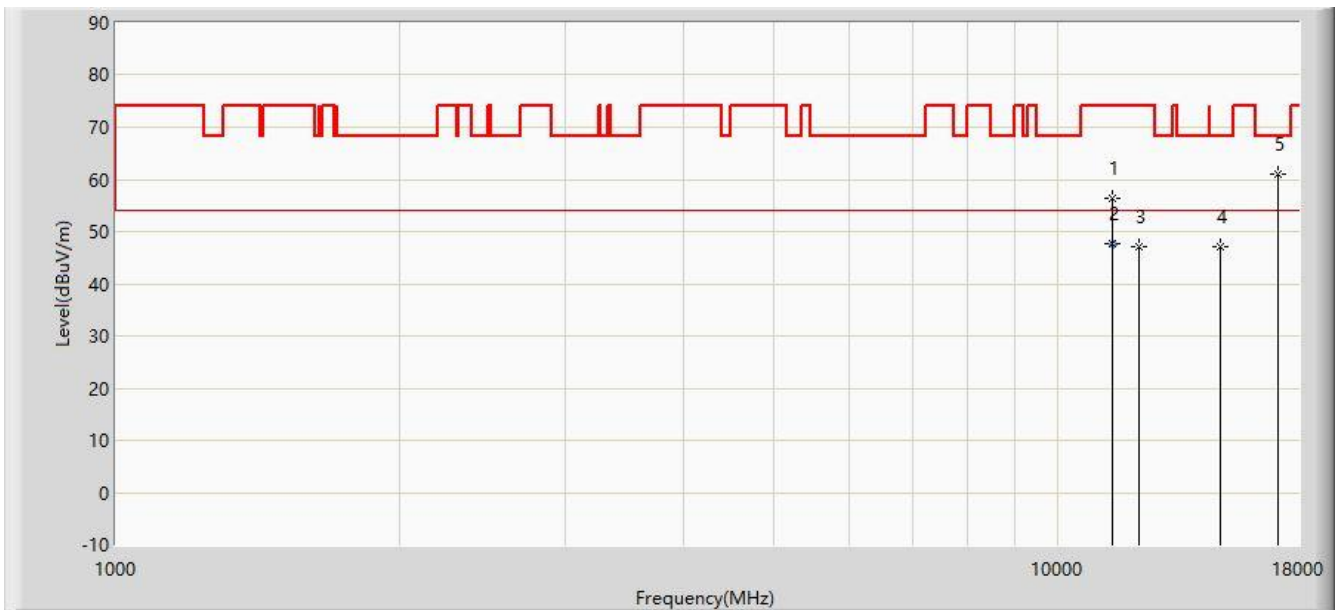


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11421.000	56.484	38.509	-17.516	74.000	17.975	PK
2		*	11423.000	47.558	29.581	-6.442	54.000	17.977	AV
3			12194.500	47.050	29.236	-26.950	74.000	17.814	PK
4			14880.500	47.004	26.247	-21.196	68.200	20.758	PK
5			17133.000	60.945	34.177	-7.255	68.200	26.768	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5710MHz with OAW-AP1321	

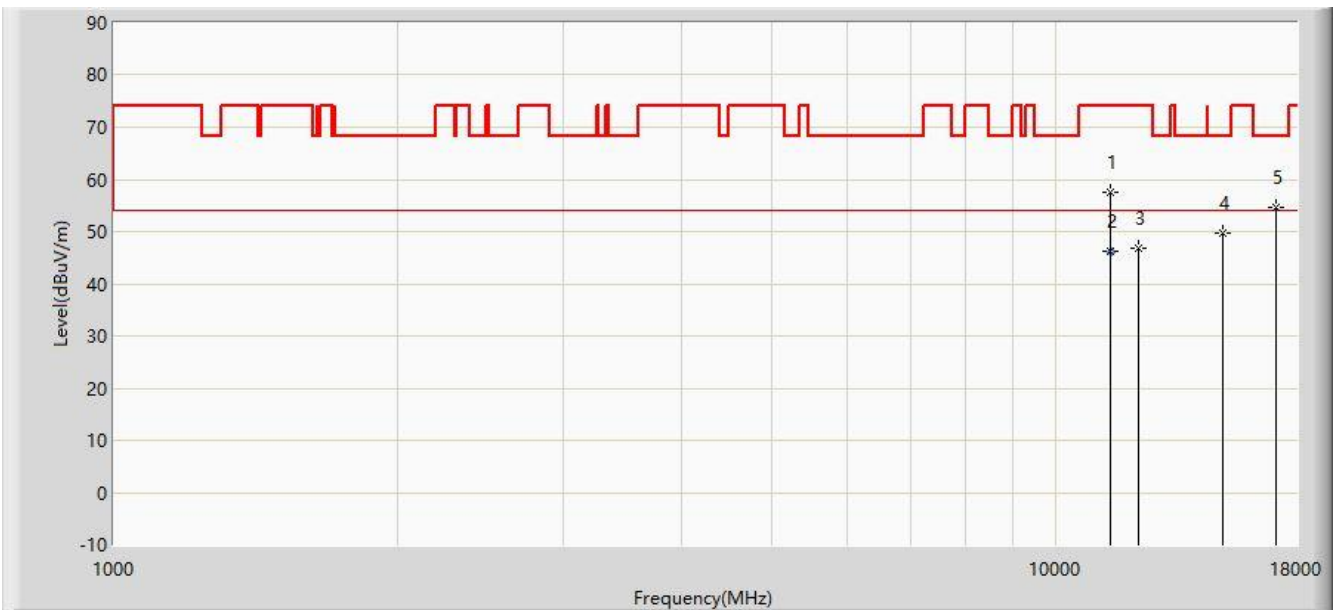


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11421.000	57.643	39.668	-16.357	74.000	17.975	PK
2		*	11425.000	46.337	28.358	-7.663	54.000	17.979	AV
3			12211.500	46.745	28.931	-27.255	74.000	17.814	PK
4			15025.000	49.706	28.908	-18.494	68.200	20.798	PK
5			17124.500	54.645	27.957	-13.555	68.200	26.688	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1321	

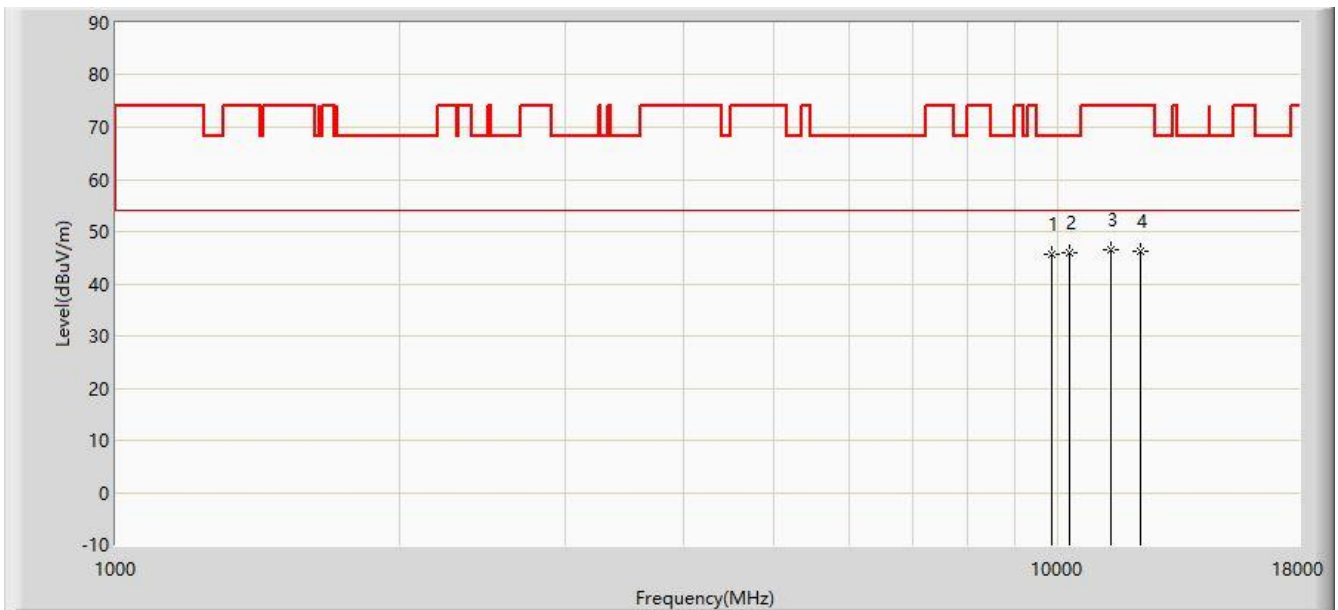


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9840.000	45.545	30.810	-22.655	68.200	14.735	PK
2		*	10282.000	45.896	29.728	-22.304	68.200	16.168	PK
3			11395.500	46.473	28.521	-27.527	74.000	17.953	PK
4			12220.000	46.180	28.366	-27.820	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1321	

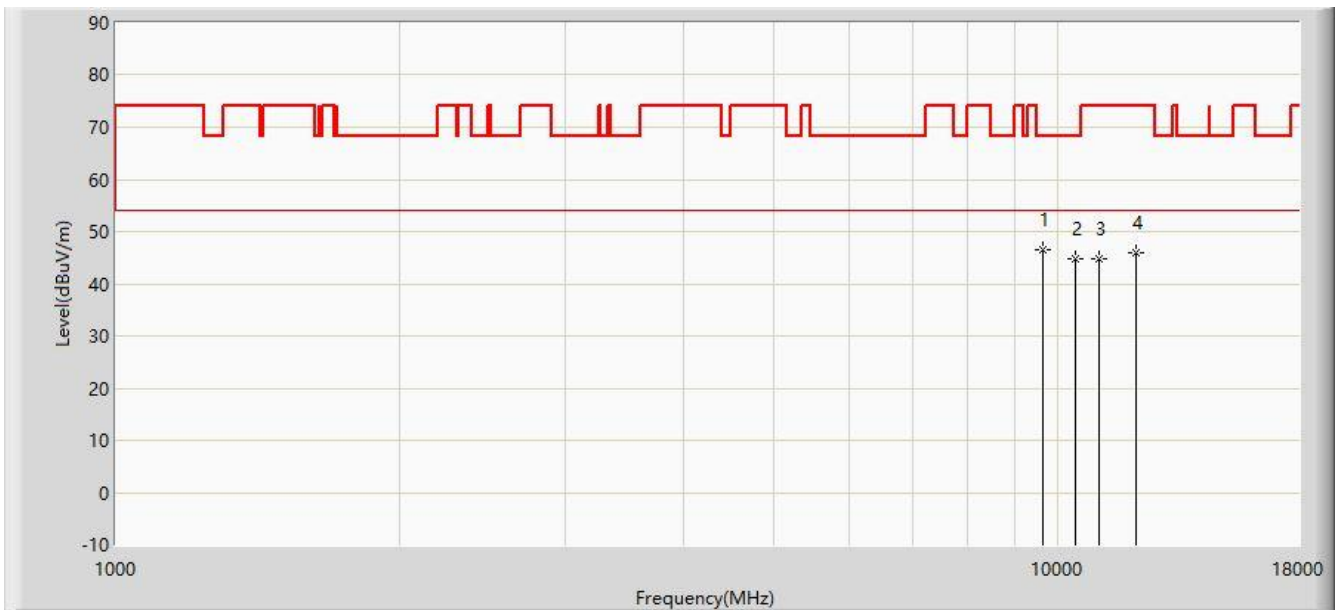


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	46.447	32.353	-21.753	68.200	14.094	PK
2			10435.000	44.638	27.977	-23.562	68.200	16.661	PK
3			11047.000	44.799	27.175	-29.201	74.000	17.624	PK
4			12109.500	45.862	28.046	-28.138	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1321	

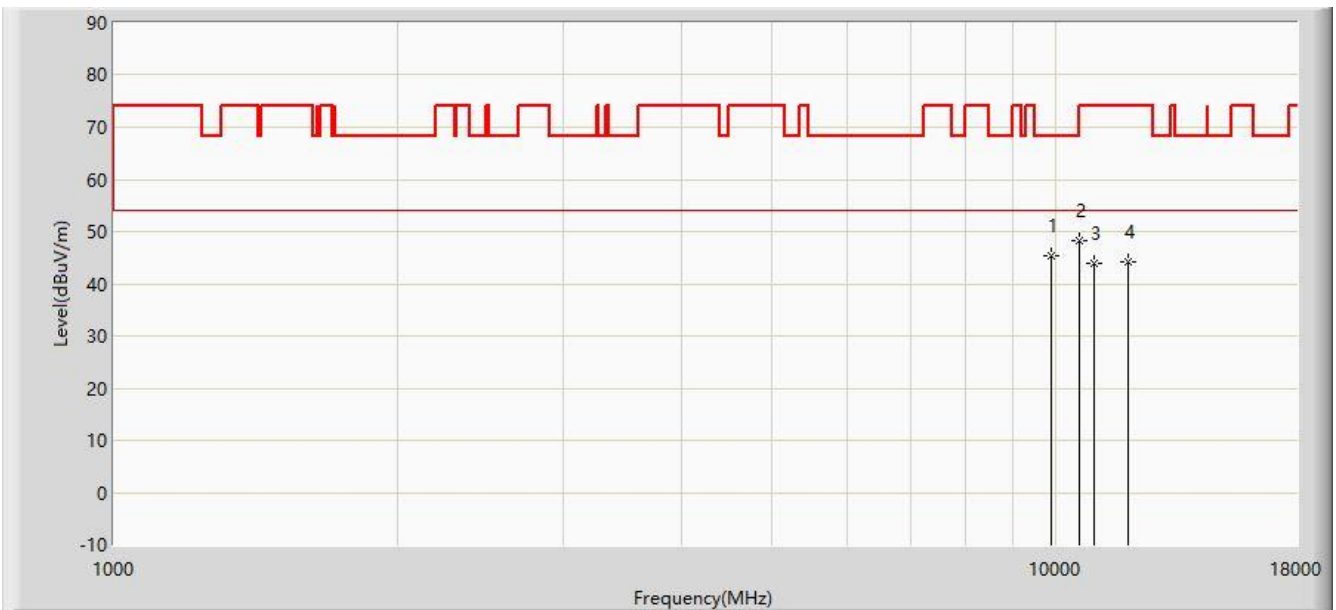


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9891.000	45.443	30.541	-22.757	68.200	14.902	PK
2		*	10579.500	48.268	31.285	-19.932	68.200	16.983	PK
3			10970.500	43.916	26.378	-30.084	74.000	17.538	PK
4			11922.500	44.334	26.478	-29.666	74.000	17.856	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1321	

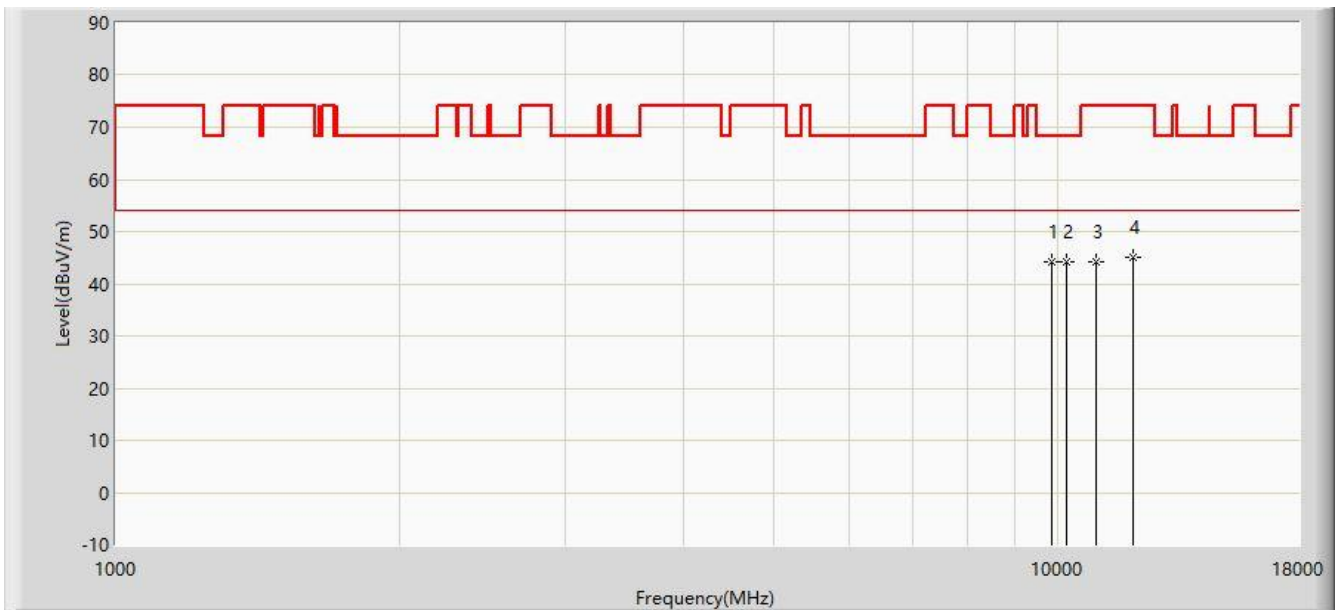

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9831.500	44.346	29.639	-23.854	68.200	14.707	PK
2			10197.000	44.219	28.325	-23.981	68.200	15.894	PK
3			10987.500	44.270	26.707	-29.730	74.000	17.563	PK
4			12024.500	44.975	27.156	-29.025	74.000	17.819	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)