

Prüfbericht-Nr.: Test Report No.:	50209834 001	Auftrags-Nr.: Order No.:	114082290	Seite 1 von 31 Page 1 of 31
Kunden-Referenz-Nr.: Client Reference No.:	N/A	Auftragsdatum: Order date:	1-Oct-2018	
Auftraggeber: Client:	馨馳企業有限公司 高雄市仁武區赤山里澄仁東街 501 巷 31 號 1 樓			
Prüfgegenstand: Test item:	SPIKE HOLDER			
Bezeichnung / Typ-Nr.: Identification / Type No.:	HPEE-SENSOR-TH			
Auftrags-Inhalt: Order content:	NCC Test report (Zigbee)			
Prüfgrundlage: Test specification:	NCC Low-power Radio-frequency Devices Technical Regulations LP0002(2018) Section 3.10.1			
Wareneingangsdatum: Date of receipt:	4-Dec-2018			
Prüfmuster-Nr.: Test sample No.:	A000848326-003, 004			
Prüfzeitraum: Testing period:	5-Dec-2018 – 17-Dec-2018			
Ort der Prüfung: Place of testing:	EMC/RF Laboratory Taipei			
Prüflaboratorium: Testing laboratory:	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
2018-12-17  Mars Y.J. Lin / Project Engineer		2018-12-17  Rene Charton / Expert, Electrical		
Datum Date (Report Date)	Name / Stellung Name / Position	Unterschrift Signature	Datum Date	Name / Stellung Name / Position
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 PEAK OUTPUT POWER

RESULT: Passed

5.1.3 6dB BANDWIDTH

RESULT: Passed

5.1.4 POWER DENSITY

RESULT: Passed

5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100kHz BANDWIDTH

RESULT: Passed

5.1.6 SPURIOUS EMISSION

RESULT: Passed

5.2.1 MAINS CONDUCTED EMISSIONS

RESULT: Passed

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2.	TEST SITES	6
2.1	TEST LABORATORY	6
2.2	TEST FACILITY.....	6
2.3	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.4	TRACEABILITY	8
2.5	CALIBRATION	8
2.6	MEASUREMENT UNCERTAINTY	8
3.	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	SYSTEM DETAILS AND RATINGS.....	9
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Peak Output Power</i>	<i>15</i>
5.1.3	<i>6dB Bandwidth</i>	<i>16</i>
5.1.4	<i>Power Density</i>	<i>19</i>
5.1.5	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....</i>	<i>22</i>
5.1.6	<i>Spurious Emission</i>	<i>26</i>
5.2	MAINS EMISSIONS.....	27
5.2.1	<i>Mains Conducted Emissions.....</i>	<i>27</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP.....	28
7.	LIST OF TABLES	31

Prüfbericht - Nr.: 50209834 001
Test Report No.

Seite 4 von 31
Page 4 of 31

8. LIST OF PHOTOGRAPHS..... 31

1. General Remarks

1.1 Complementary Materials

These attachments are integral parts of this test report:

Appendix P: Photo Documentation internal view
(File Name: 50209834 001 Appendix P)

Appendix D: Test Result of Radiated Emissions
(File Name: 50209834 001 Appendix D)

Test Specifications

The following standards were applied.

Table 1: Applied Standard and Test Levels

Radio
NCC Low-power Radio-frequency Devices Technical Regulations LP0002(2018)(107 年 1 月 10 日)

2. Test Sites

2.1 Test Laboratory

TUV Rheinland Taiwan Ltd.
Taichung Branch Office

No.9, Lane 36, Minsheng Rd., Sec. 3, Daya District,
Taichung City 428
Taiwan (R.O.C.)

2.2 Test Facility

TUV Rheinland Taiwan Ltd.
Taipei Office

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC RegistrationNo.: 340738
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2016-Jul-1st to 2019-Jun-30th



Testing Laboratory
0759

2.3 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manu-facturer	Type	S/N	Last Calibration	Next Calibration
Test Software	Farad	EZ_EMC	Ver. TUV3A1	N/A	N/A
EMI Test Receiver	R&S	ESR 7	101549	2018/11/10	2019/11/10
Spectrum Analyzer	R&S	FSV 40	100921	2018/05/02	2019/05/02
EXA Signal Analyzer	KEYSIGHT	N9010A	MY52221334	2018/02/05	2019/02/04
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	2018/08/14	2019/08/14
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2018/01/18	2019/01/18
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM01G18G	60558	2018/11/21	2019/11/21
Bilog Antenna	TESEQ	CBL6111D	29804	2018/08/18	2019/08/18
Horn Antenna	ETS-Lindgren	3117	201918	2018/08/18	2019/08/18
Horn Antenna (18GHz~40GHz)	COM-POWER	AH-840	101029	2018/11/28	2019/11/28
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2018/06/14	2019/06/14
EMI Test Receiver	R&S	ESR 7	101549	2018/11/10	2019/11/10
Spectrum Analyzer	R&S	FSL3	101943	2018/09/07	2019/09/07
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	2017/03/09	2019/03/09

2.4 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.5 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular schedule using in house standards or comparisons.

2.6 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements .

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	± 0.1 ppm
RF power, conducted	± 1.5 dB
RF power density, conducted	± 3 dB
spurious emissions, conducted	± 3 dB
all emissions, radiated	± 6 dB
Temperature	± 1 °C
Humidity	± 5 %
DC and low frequency voltages	± 3 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a sensor. It contains a Zigbee compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Block Diagram.

3.2 System Details and Ratings

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	SPIKE HOLDER
Type Identification	HPEE-SENSOR-TH
Brand Name	HPEE

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequencies	2405MHz ~ 2480MHz
Channel Spacing	5MHz
Channel number	16
Operation Voltage	5Vdc
Modulation	OQPSK
Antenna gain	5dBi

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Block Diagram.

3.5 Submitted Documents

- Block Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: The EUT is set via wireless transmission. After the host is connected to the EUT, the host send a command to set transmit mode or receive mode it through the test software installed on the computer.

This software SPIKE BTKaBlue was running on the computer connected to the EUT. It was used to enable the operation modes listed in section 3.3 as appropriate.

The samples were used as follows:

A000848326-003 Radiated

A000848326-004 Conducted

Full test was applied on all test modes, but only worst case was shown

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


Kind of Equipment	Manufacturer	Model Name	S/N
Mini PC	ZOTAC	ZBOX-CI323NANO	G160500004681

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

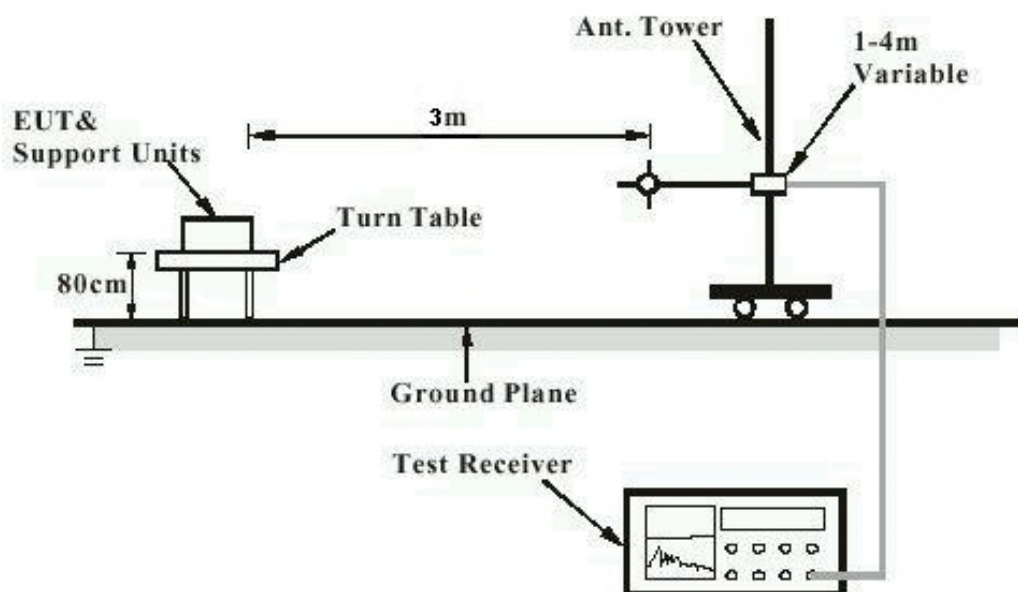

Note: Measurements above 1 GHz are done with a table height of 1.5m

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


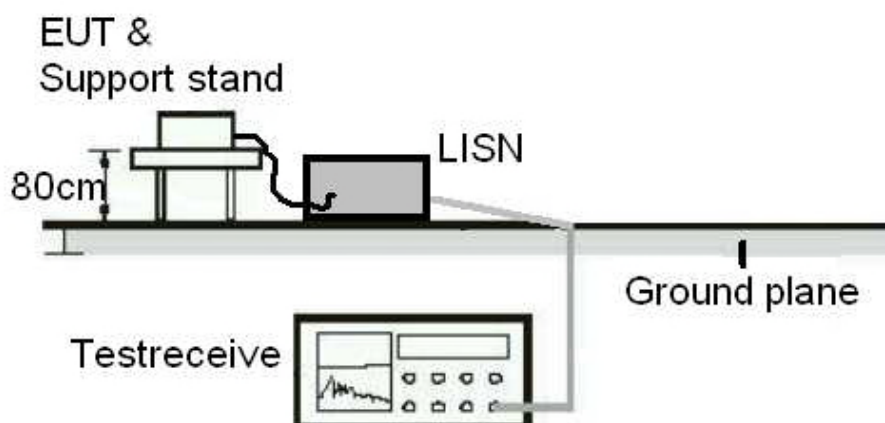


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

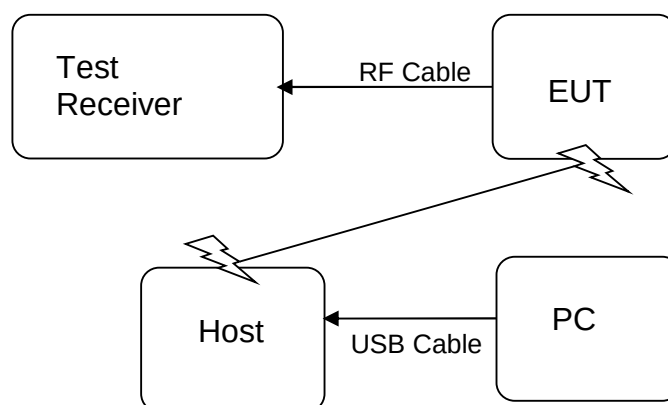

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test standard : LP0002(2018): 3.10.1.3, 3.10.1.4

Requirement : use of approved antennas only with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 5dBi. The antenna is a Wire Antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Peak Output Power

RESULT:**Passed**

Test standard : LP0002(2018): 3.10.1.2 (1)(C)

Basic standard : LP0002(2018)

Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High

Operation Mode : A

Ambient temperature : 20-24 °C

Relative humidity : 50-65 %

Atmospheric pressure : 100-103 kPa

Table 6: Test result of Peak Output Power

Channel	Frequency	Conducted power		Limit
	(MHz)	(dBm)	(W)	(W)
Low Channel	2405.0	-0.62	0.00087	1
Middle Channel	2440.0	-0.32	0.00093	1
High Channel	2480.0	-0.54	0.00088	1

Pmax: 0.929mW

5.1.3 6dB Bandwidth

RESULT:**Passed**

Test standard : LP0002(2018): 3.10.1.6 (2)(A)

Basic standard : LP0002(2018)

Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High

Operation Mode : A

Ambient temperature : 20-24°C

Relative humidity : 50-65%


Atmospheric pressure : 100-103 kPa

Table 7: Test result of 6dB Bandwidth


Channel	Frequency	6dB Bandwidth	Limit	Result
	(MHz)	(MHz)	(kHz)	
Low Channel	2405	1.577	>500	PASS
Middle Channel	2440	1.574	>500	PASS
High Channel	2480	1.710	>500	PASS

Test Plot of 6dB Bandwidth

Low Channel

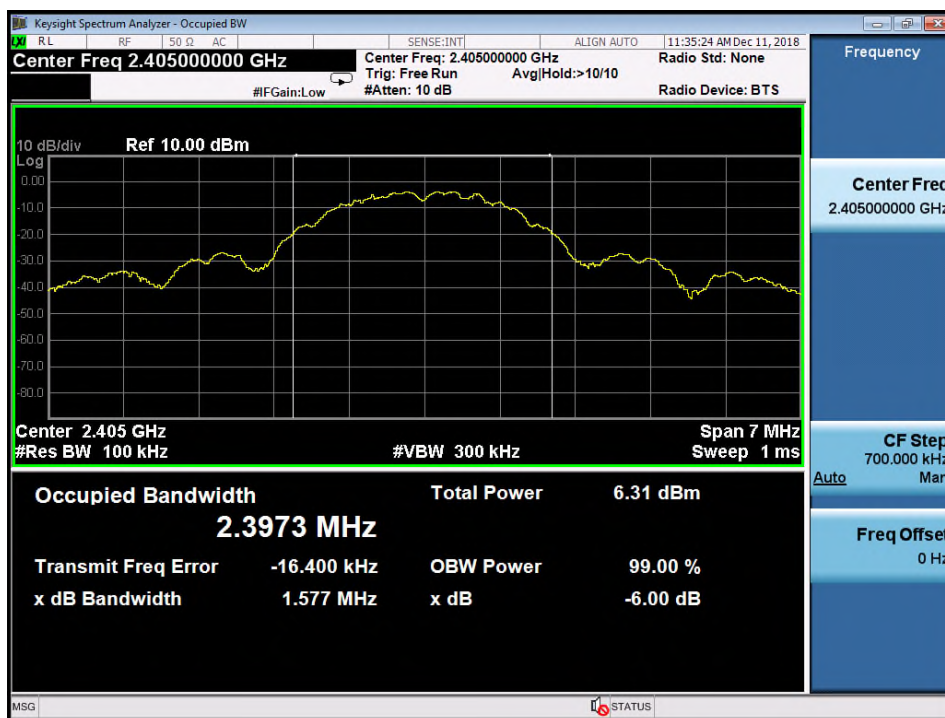

Middle Channel

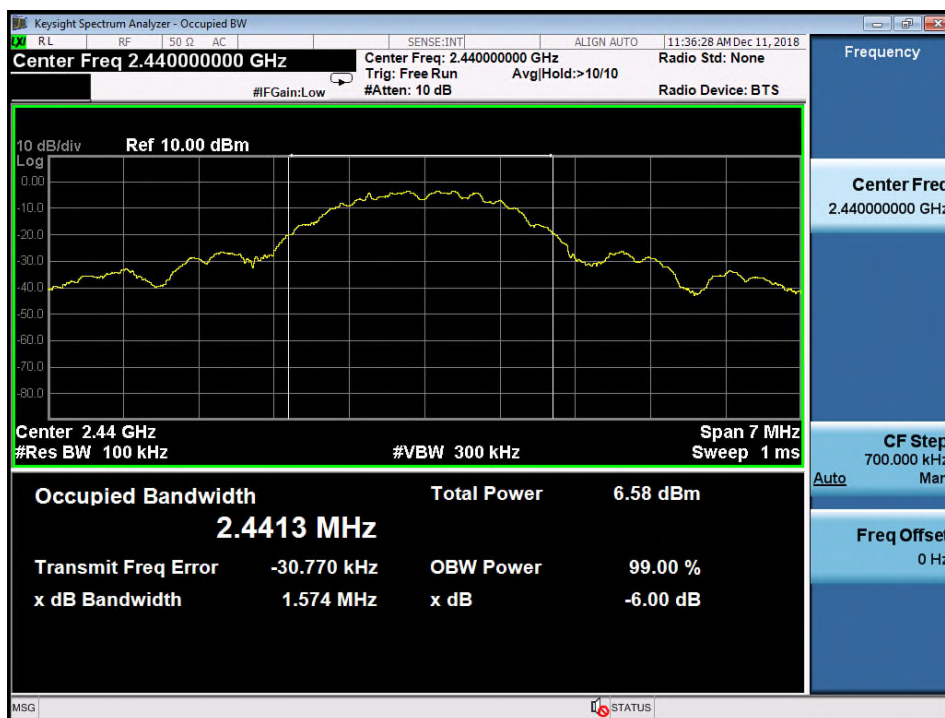

High Channel



5.1.4 Power Density**RESULT:****Passed**

Test standard : LP0002(2018): 3.10.1.6, (2)(B)

Basic standard : LP0002(2018)

Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High

Operation Mode : A

Ambient temperature : 20-24°C

Relative humidity : 50-65%

Atmospheric pressure : 100-103 kPa

Table 8: Test result of Power Density


Channel	Frequency	Power Density	Limit	Result
	(MHz)	(dBm)	(dBm)	
Low Channel	2405	-9.275	8	PASS
Middle Channel	2440	-8.810	8	PASS
High Channel	2480	-9.418	8	PASS

Test Plot of Power Density


Low Channel



Middle Channel

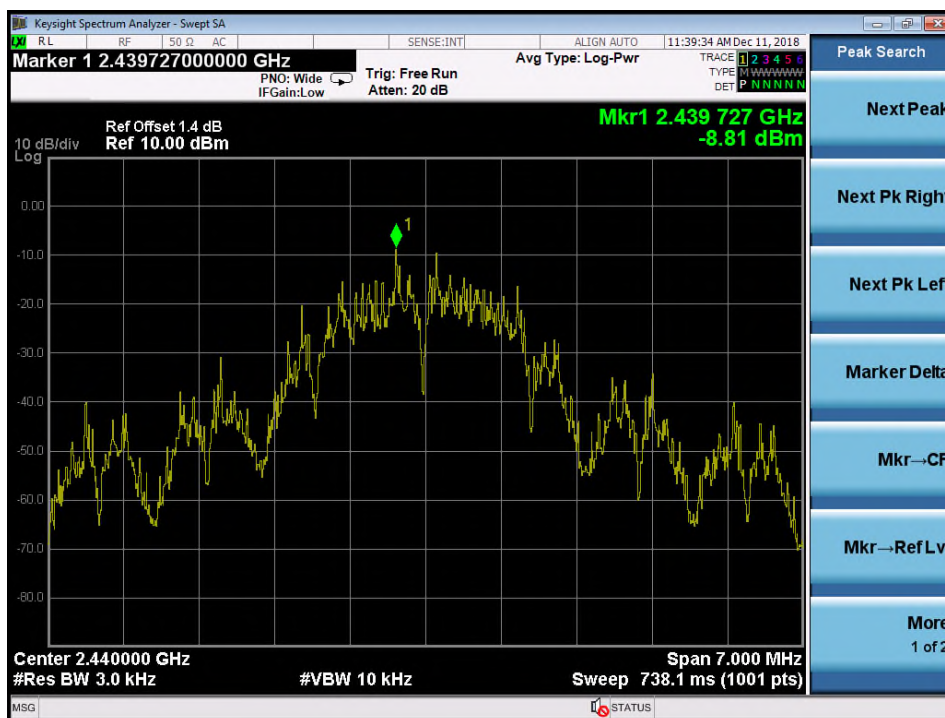

High Channel

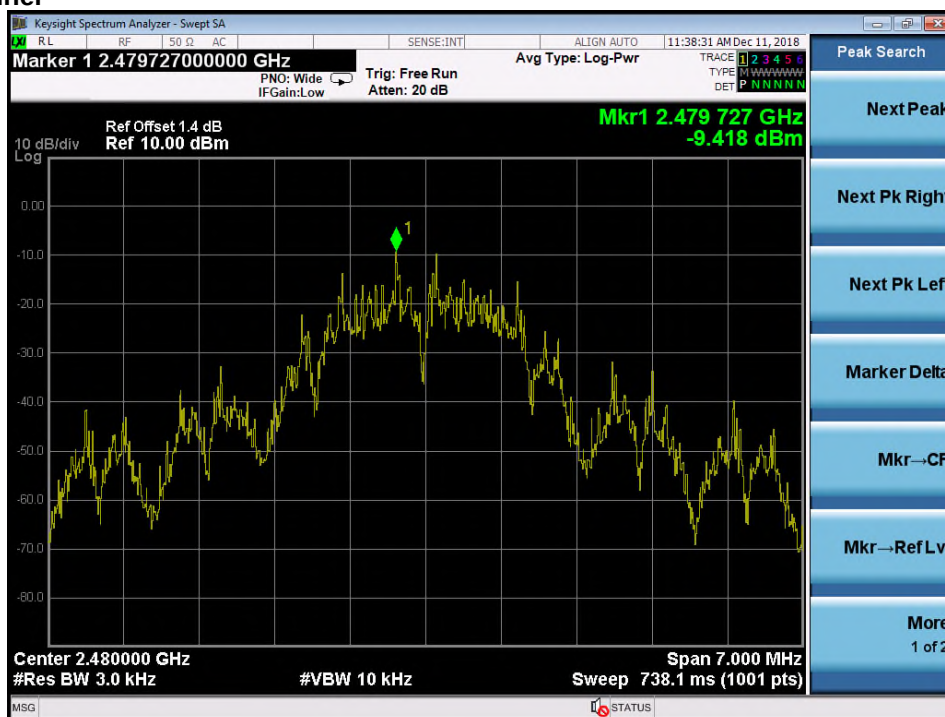

5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

RESULT:**Passed**

Test standard	:	LP0002(2018): 3.10.1.5
Basic standard	:	LP0002(2018)
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup


Test Channel	:	Low/ Middle/ High for Conducted Spurious Emissions Low/ High for Frequency Band Edge
Operation Mode	:	A
Ambient temperature	:	20-24°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.


Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.


Test Plot 100kHz Conducted Emissions

Low Channel

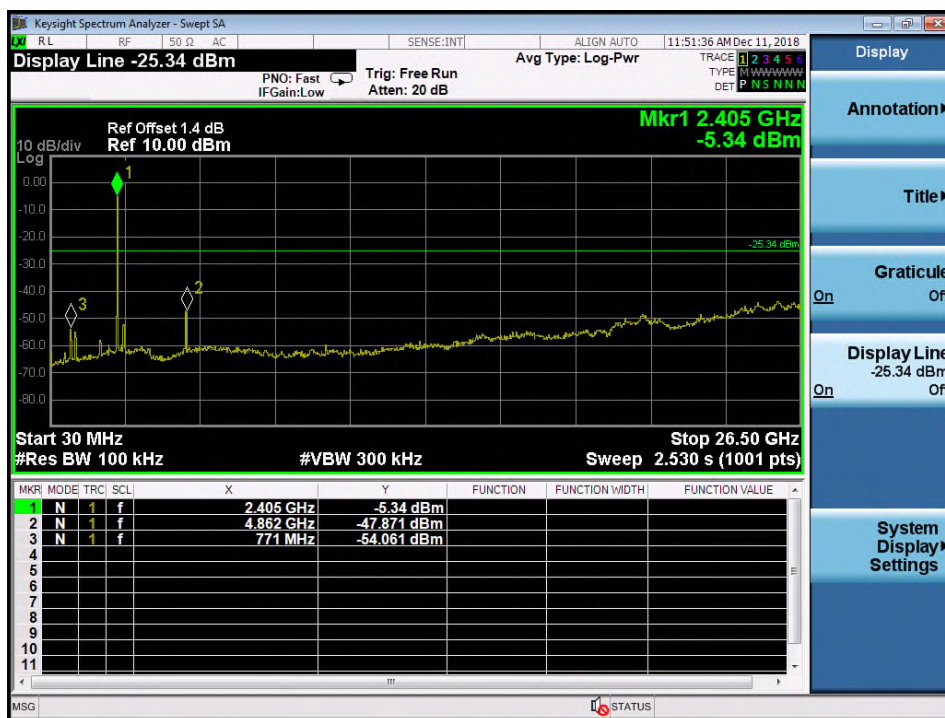


Middle Channel

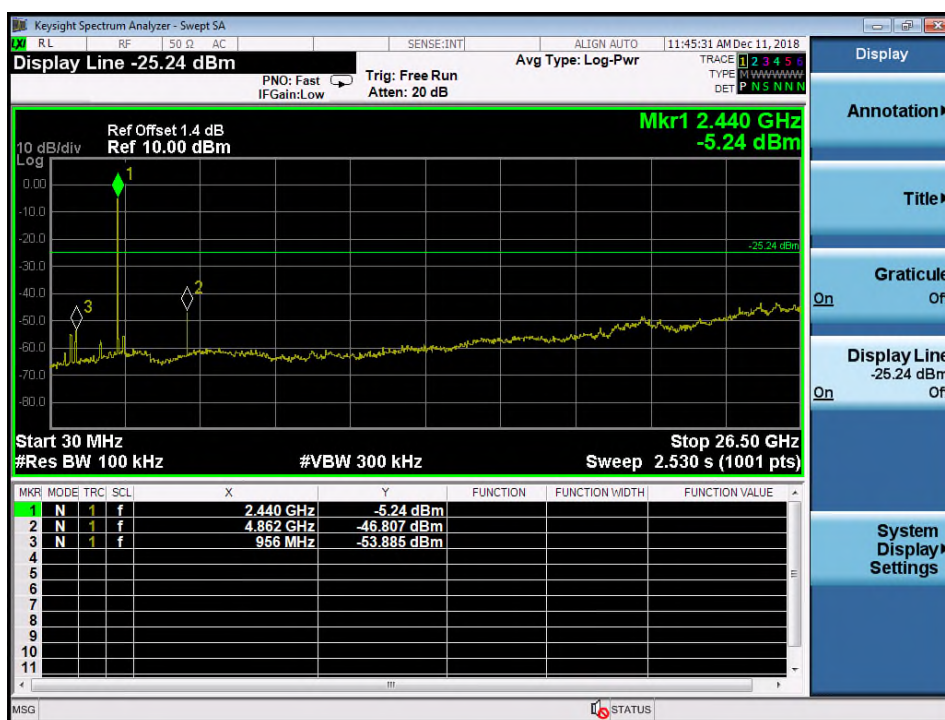

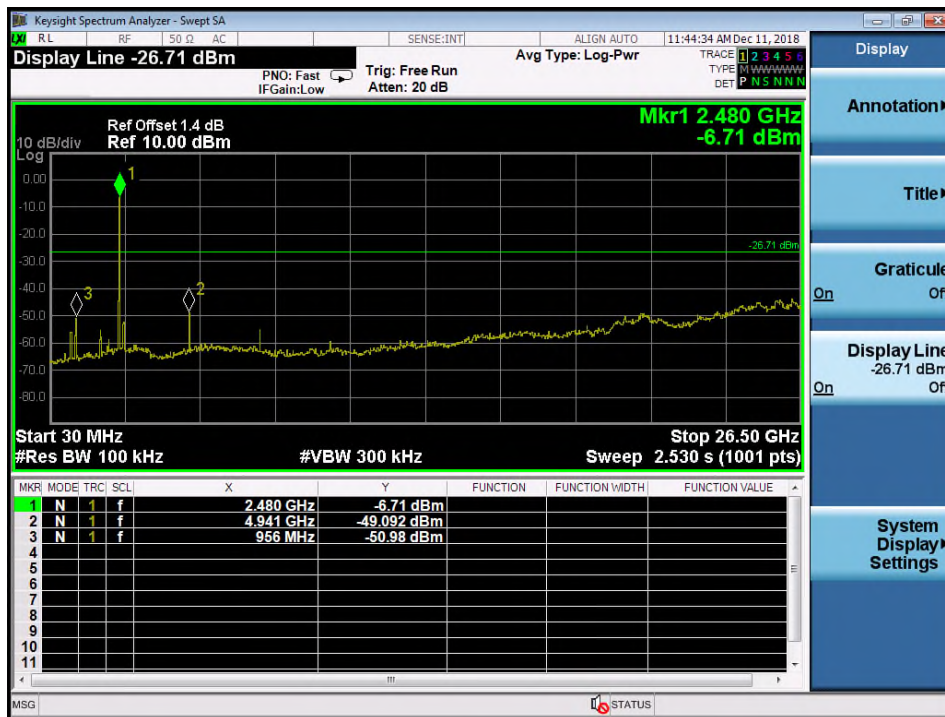
High Channel


Test Plot 100kHz RBW of Band Edge

Low Channel

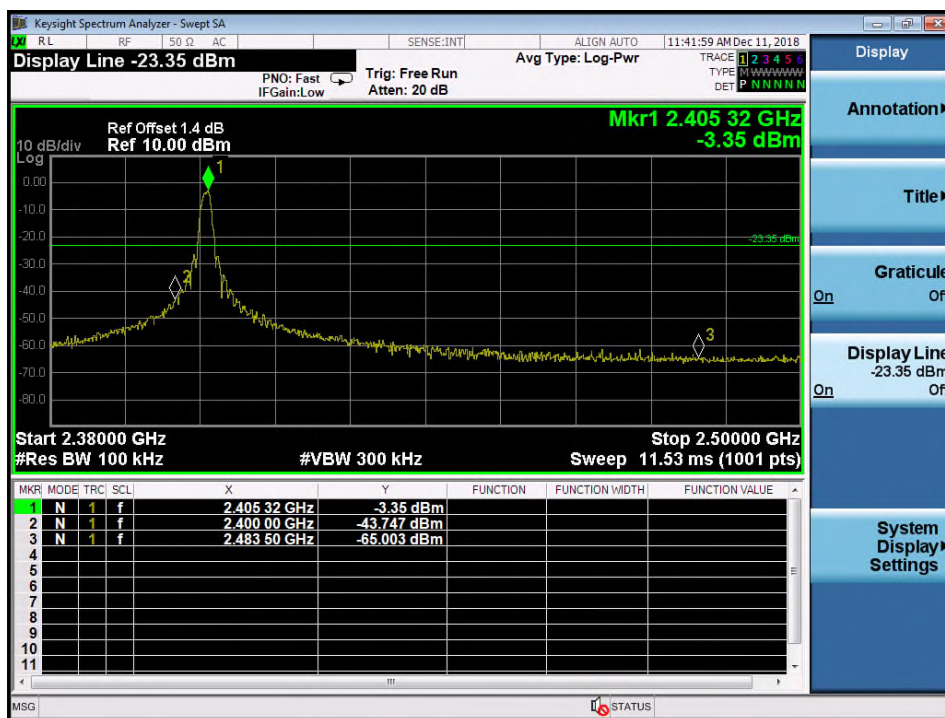

High Channel

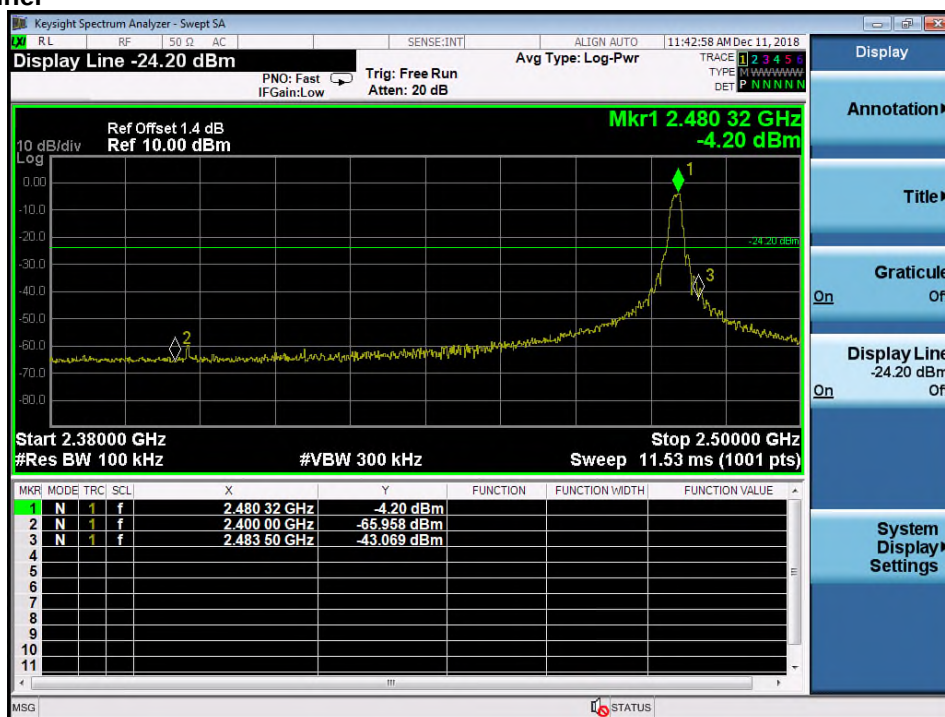

5.1.6 Spurious Emission

RESULT:**Passed**

Test standard	:	LP0002(2018): 3.10.1.5, (2)
Basic standard	:	LP0002(2018)
Limits	:	Radiated emissions which fall in the restricted bands, as defined in LP0002(2018): 2.7 , must comply with the radiated emission limits specified in LP0002(2018): 2.8 Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in LP0002(2018): 2.8
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A,B

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.

Testing was carried out within frequency range 30MHz to the tenth harmonic. For details refer to Appendix D. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

5.2 Mains Emissions

5.2.1 Mains Conducted Emissions


RESULT:**Passed**

Test standard	:	LP0002(2018): 2.3
Limits	:	Mains Conducted emissions as defined in above test standards must comply with the mains conducted emission limits specified
Kind of test site	:	Shielded Room
Test setup		
Test Channel	:	Middle
Operation mode	:	A
Ambient temperature	:	20-24°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa


Remark: For details refer to Appendix D.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)

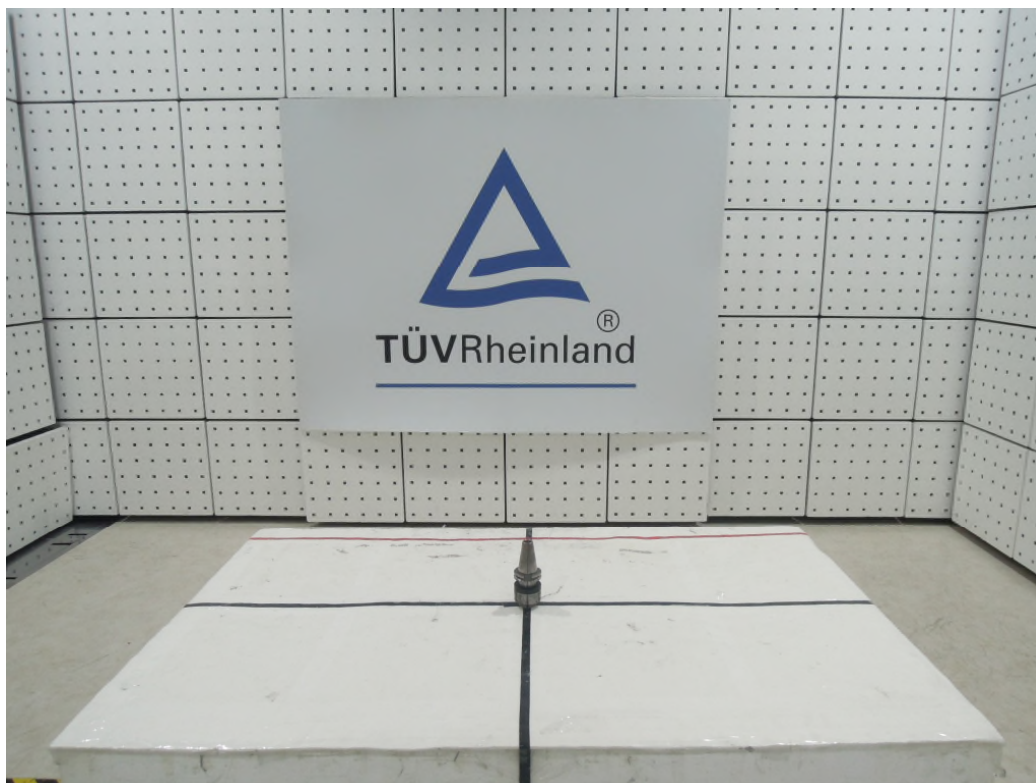


Photograph 2: Set-up for Spurious Emissions (Back View 1)

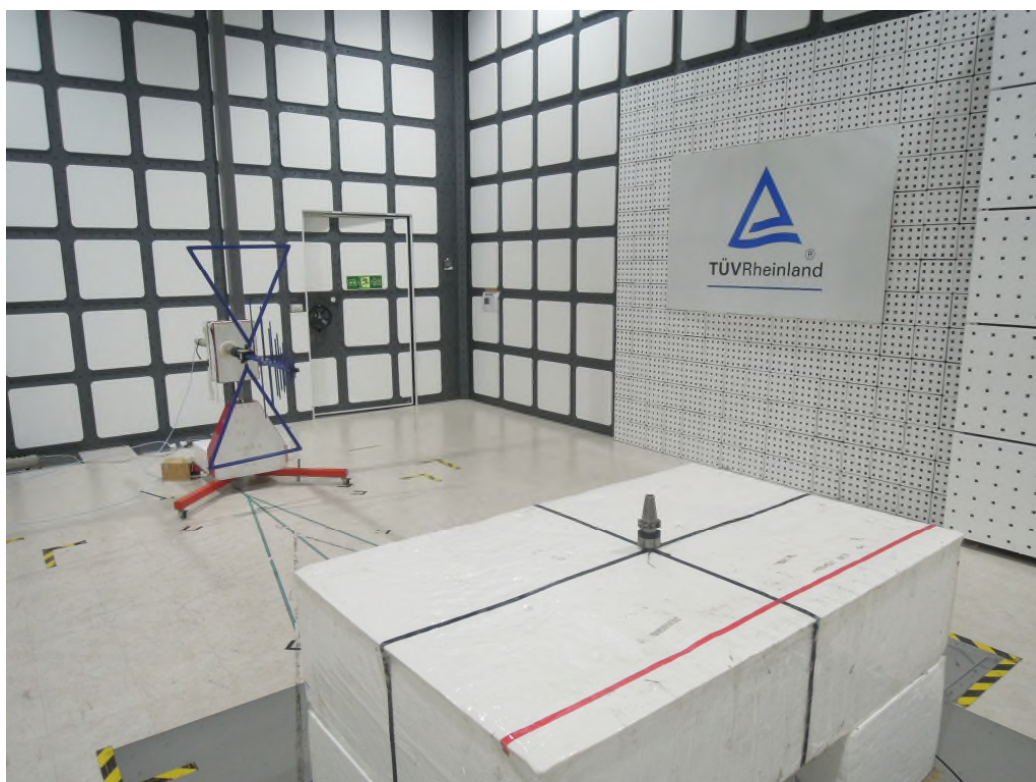

Photograph 3: Set-up for Spurious Emissions (Back View 2)

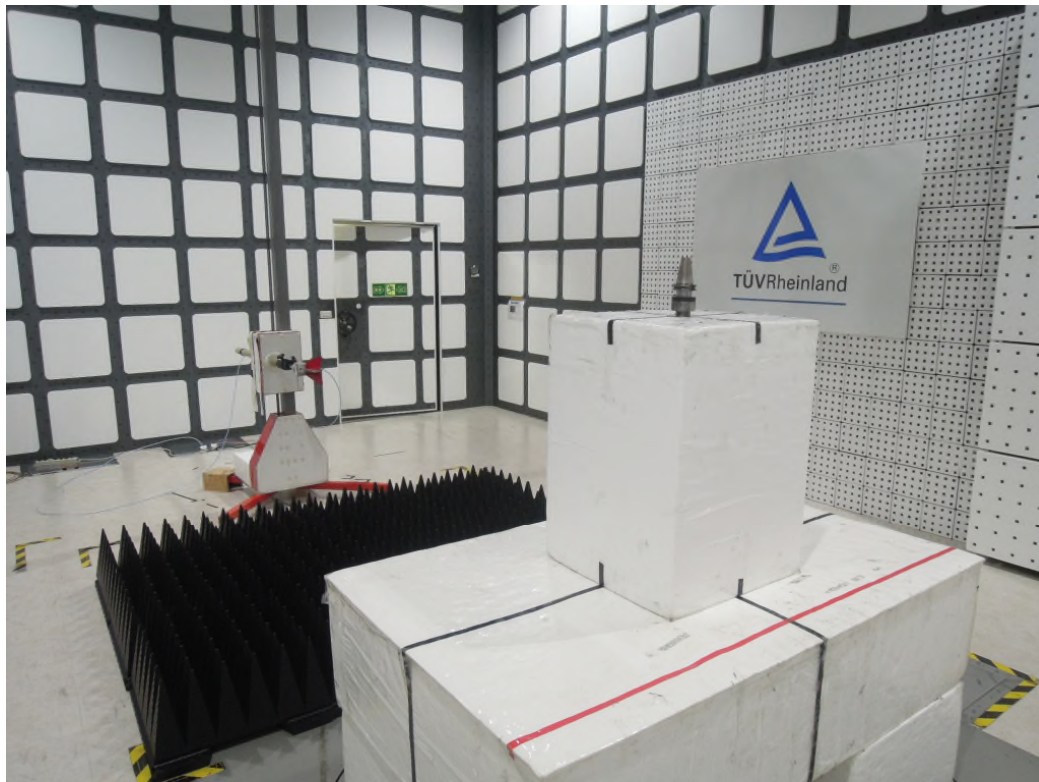


Photograph 4: Set-up for Conducted testing

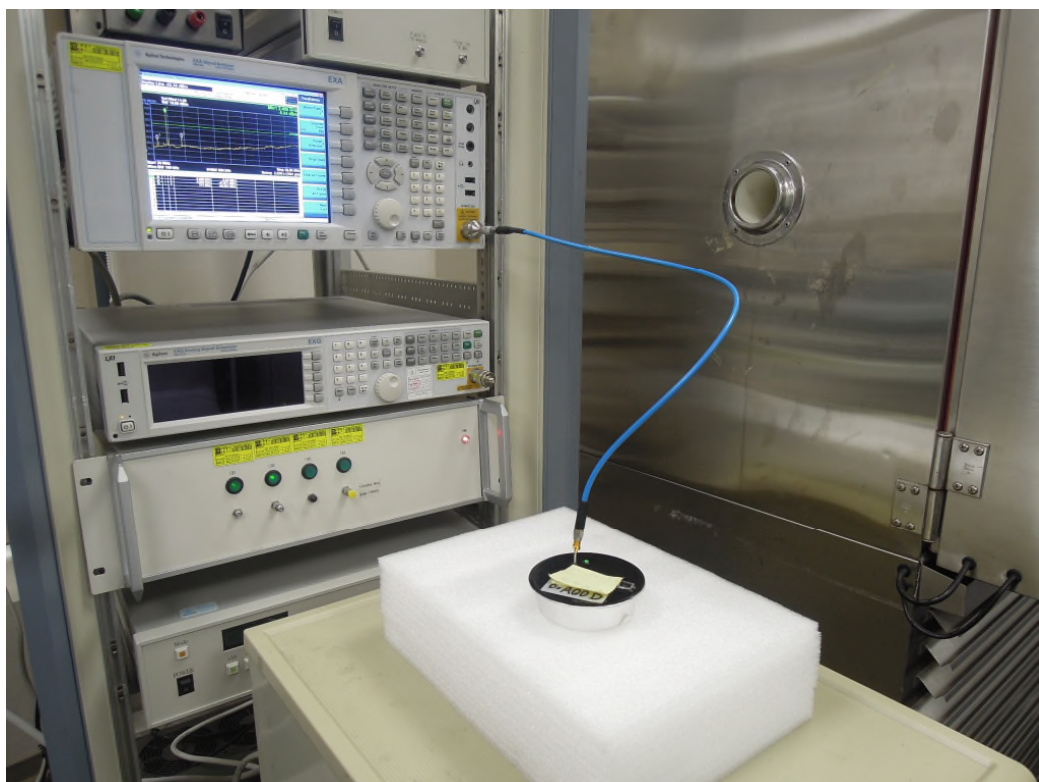

Photograph 5: Set-up for AC Mains(Front View)



Photograph 6: Set-up for AC Mains(Back View)

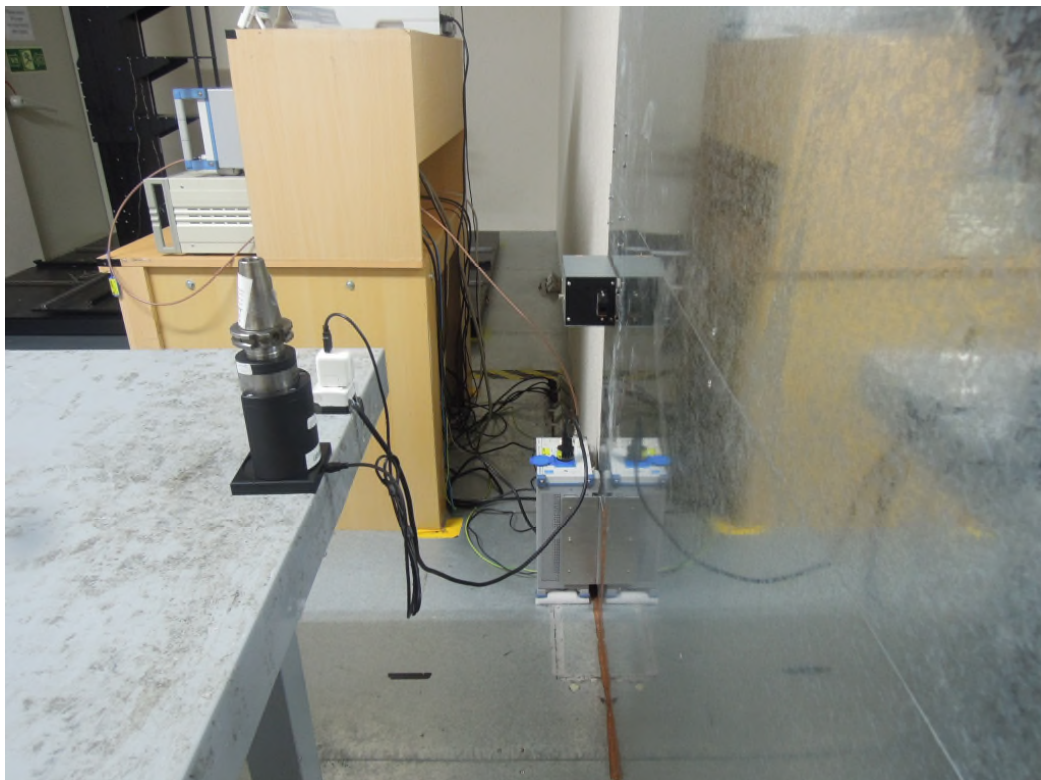

7. List of Tables

Table 1: Applied Standard and Test Levels	5
Table 2: List of Test and Measurement Equipment	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Test result of Peak Output Power	15
Table 7: Test result of 6dB Bandwidth	16
Table 8: Test result of Power Density	19

8. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	28
Photograph 2: Set-up for Spurious Emissions (Back View 1)	28
Photograph 3: Set-up for Spurious Emissions (Back View 2)	29
Photograph 4: Set-up for Conducted testing	29
Photograph 5: Set-up for AC Mains(Front View).....	30
Photograph 5: Set-up for AC Mains(Back View)	30