

Prüfbericht-Nr.: Test report no.:	CN21CT1R(LP0002-BLE) 001	Auftrags-Nr.: Order no.:	238496131	Seite 1 von 27 Page 1 of 27
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2021-01-08	
Auftraggeber: Client:	RHA Technologies Limited 69 Haugh Road, Glasgow, G38TX, United Kingdom			
Prüfgegenstand: Test item:	Bluetooth Headset			
Bezeichnung / Typ-Nr.: Identification / Type no.:	Atlas ANC			
Auftrags-Inhalt: Order content:	NCC LP0002 Test Report (BLE)			
Prüfgrundlage: Test specification:	NCC Low-power Radio-frequency Devices Technology Regulations LP0002 (2020) Section 4.10.1			
Wareneingangsdatum: Date of sample receipt:	2021-01-06			
Prüfmuster-Nr.: Test sample no:	A002981605-004 A002981605-006			
Prüfzeitraum: Testing period:	2020-01-07 - 2020-01-15			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
überprüft von: reviewed by:			genehmigt von: authorized by:	
Datum: Date:	2021-01-19		Ausstellungsdatum: Issue date:	2021-01-19
Stellung / Position:	Senior Project Engineer		Stellung / Position:	Senior Project Manager
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	LP0002 4.10.1.3 & 4.10.1.4	Antenna Requirement	Pass
5.1.2	LP0002 4.10.1.2	Peak Output Power	Pass
5.1.3	LP0002 4.10.1.6	6 dB Bandwidth	Pass
5.1.4	LP0002 4.10.1.6	Power Spectral Density	Pass
5.1.5	LP0002 4.10.1.5	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	LP0002 4.10.1.5	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	LP0002 3.3	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES.....	15
5.1.1 Antenna Requirement	15
5.1.2 Peak Output Power	16
5.1.3 6 dB Bandwidth	18
5.1.4 Power Spectral Density.....	19
5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....	20
5.1.6 Radiated Spurious Emissions and Band Edges	21
5.2 MAINS EMISSION	26
5.2.1 Mains Conducted Emission.....	26

Prüfbericht - Nr.: CN21CT1R(LP0002-BLE) 001
Test Report No.

Seite 4 von 27
Page 4 of 27

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN21CT1R(LP0002-BLE) 001
Test Report No.

Seite 5 von 27
Page 5 of 27

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN21CT1R(LP0002-BLE) 001	Original Release	2021-01-19

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
NCC Low-power Radio-frequency Devices Technical Regulations LP0002 (2020) (109 年 7 月 1 日)
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth Headset. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Bluetooth Headset
Type Identification	Atlas ANC
Brand Name	RHA

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	2 MHz
Channel Number	40
Data Rate	1Mbps, 2Mbps
Operation Voltage	USB 5Vdc, tested at 3.7Vdc
Modulation	GFSK
Maximum Output Power (mW)	0.63
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	Default
2440	Default
2480	Default

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	BlueTest3
---------------	-----------

The samples were used as follows:

A002981605-004 for radiated

A002981605-006 for conducted

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on Y-plane.
2. "-" means no effect.

Antenna Port Conducted Measurement

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Above 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
Tx			
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2
Rx			
-	2402 to 2480	2402	1

Radiated Spurious Emissions (Below 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
Tx / Rx			
-	2402 to 2480	2402	1

Mains Conducted Emission

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	21.2 °C	46.8 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	13.4~16 °C	58.6~63.4 %	Simon Tsai
Radiated Spurious Emissions below 1 GHz	13.4~16 °C	58.6~63.4 %	Simon Tsai
Mains Conducted Emission	23 °C	60 %	Chun-Yi Wu

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


No.	Product	Brand	Model	Description
A	USB Cable	FPRTECHNOLOGY (SHENZHEN) CO.,LTD	USBA/M2.0 TO USB-C2.0	50 cm shielded cable with core Radiated and Mains Conducted Tests
-	Audio Cable	立貿極細電線有限公司	CP19031-1	2.5mm to 3.5mm
-	Flight Adapter	Fengyi Industry (HuiZhou) Co., Ltd	AD34J-2PMPG-RHA	-

Support Unit


Radiated Test					
No.	Description	Brand	Model	S/N	Remark
1	Notebook	Lenovo	TP00094A	PF-1GT015	-
2	Adapter	Lenovo	ADLX45YCC3A	-	180 cm shielded cable w/o core
Mains Conducted Test					
1	NoteBook	HP	TPN-C135	-	-
2	Adapter	HP	L2598-002	-	180 cm shielded cable w/o core
Conducted Test					
-	Notebook	HP	TPN-C139	CND93662WT	-

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

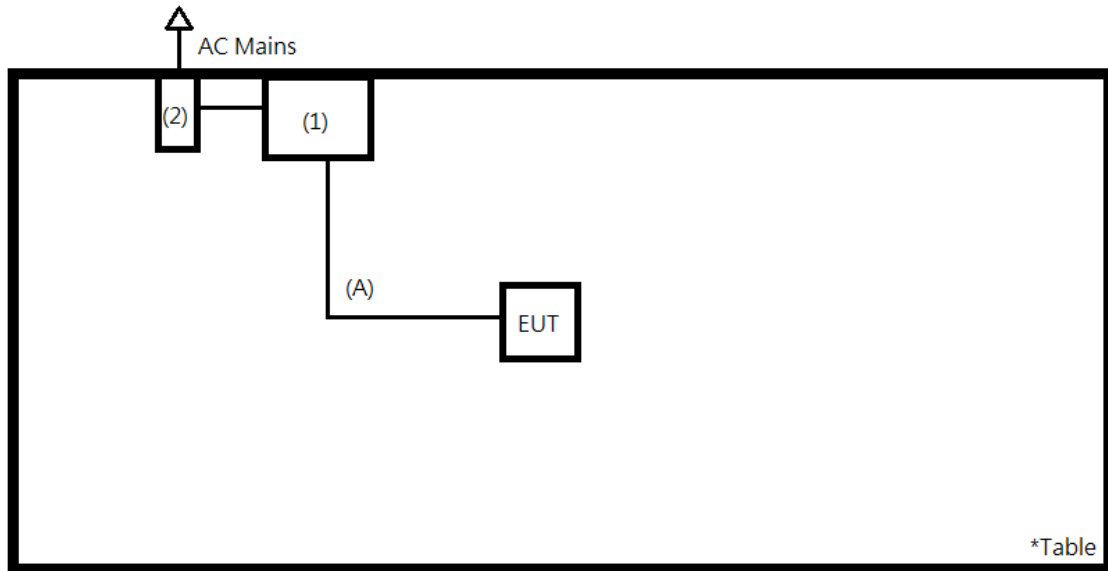

<Mains Conducted Emission mode>

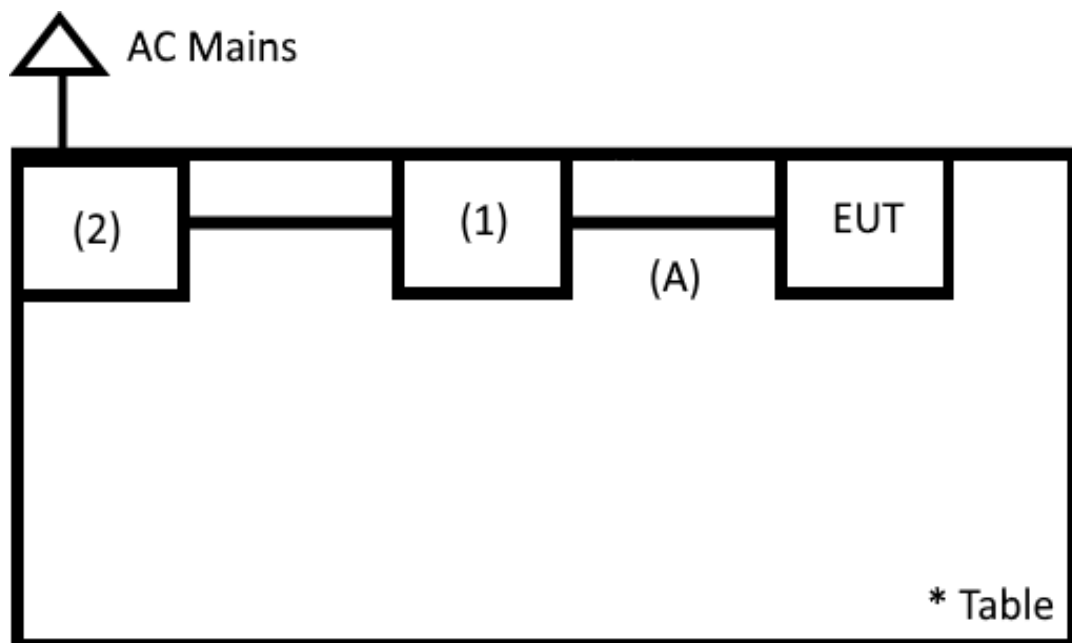

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the antenna information is as listed below. The antenna is with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Brand Name	Model No.	Antenna Type	Antenna Gain (dBi)
Inpag	RFFPA382503EMAB302	PCB Antenna	4.61


Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2020/4/6	2021/4/5	2021/1/7	2021/1/7
Power Sensor	Anritsu	MA2411B	1725269	2020/4/7	2021/4/6	2021/1/7	2021/1/7

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<1Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	-2.09	0.62	30
Middle Channel	2440	-2.02	0.63	30
High Channel	2480	-2.57	0.55	30

<2Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	-2.12	0.61	30
Middle Channel	2440	-2.06	0.62	30
High Channel	2480	-2.57	0.55	30

Average Power
<1Mbps>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	-2.24	0.60
Middle Channel	2440	-2.20	0.60
High Channel	2480	-2.74	0.53

<2Mbps>


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	-2.28	0.59
Middle Channel	2440	-2.20	0.60
High Channel	2480	-2.71	0.54

5.1.3 6 dB Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Agilent	N9010A	MY53470241	2020/6/2	2021/6/1	2021/1/7	2021/1/7

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Agilent	N9010A	MY53470241	2020/6/2	2021/6/1	2021/1/7	2021/1/7

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Agilent	N9010A	MY53470241	2020/6/2	2021/6/1	2021/1/7	2021/1/7

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in LP0002 (2020): 3.5, must comply with the radiated emission limits specified in LP0002 (2020): 3.6.

Emissions radiated outside the specified frequency bands must comply with the radiated emission limits specified in LP0002 (2020): 3.6.


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

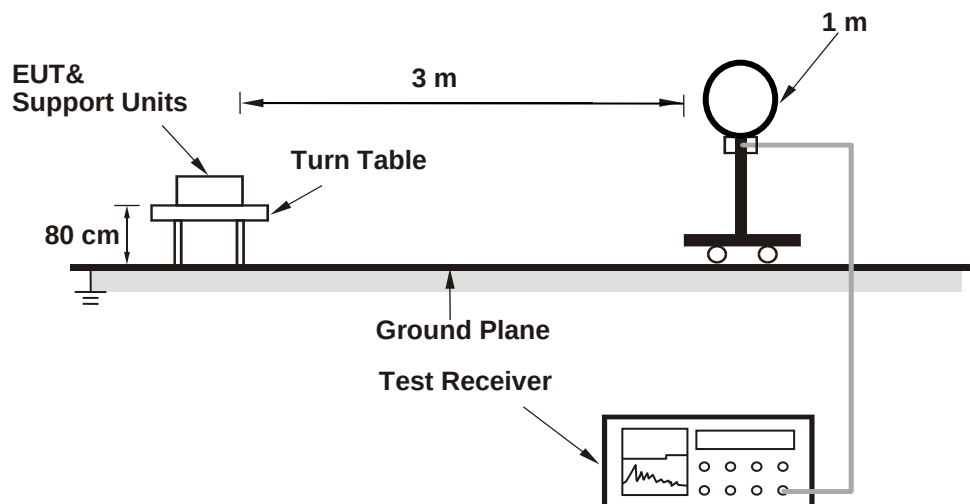

<Radiated Emissions 30 MHz to 1 GHz>

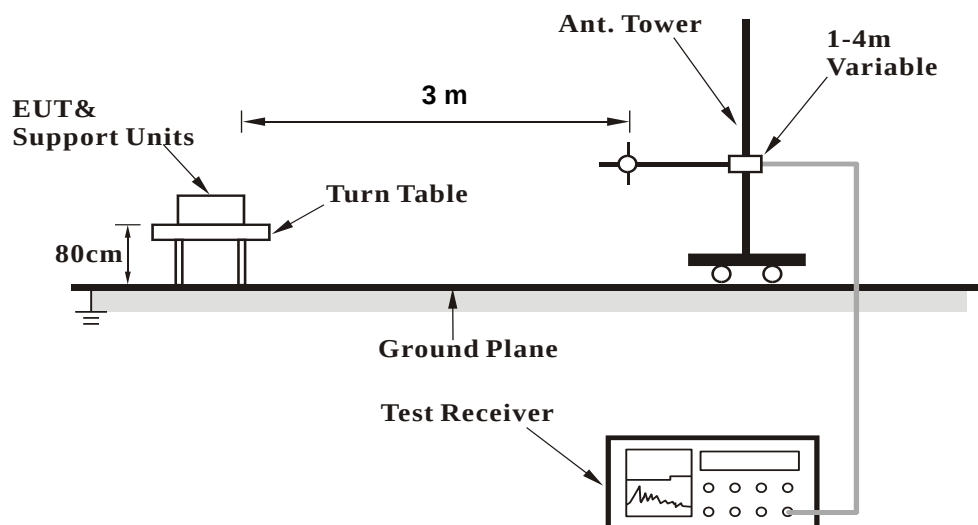

<Radiated Emissions above 1 GHz>

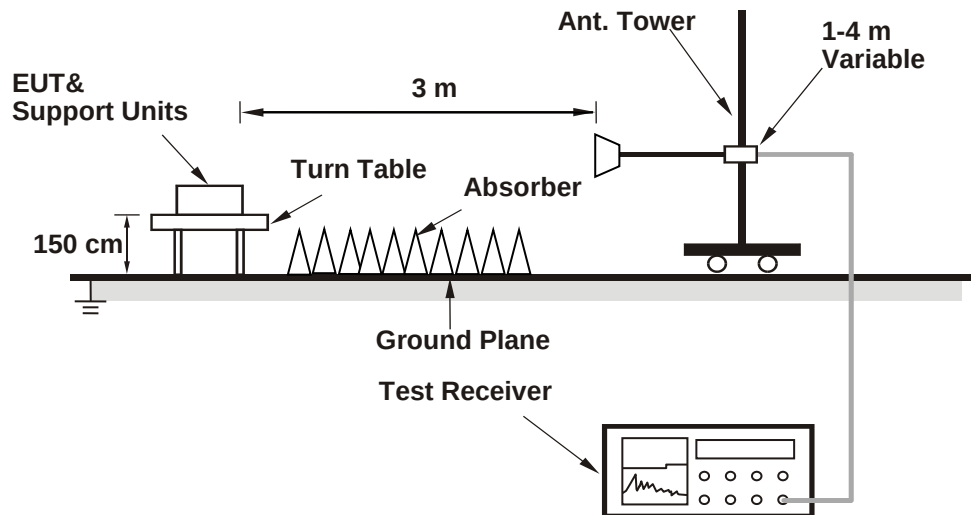

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht - Nr.: CN21CT1R(LP0002-BLE) 001
Test Report No.
Seite 23 von 27
Page 23 of 27
Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101508	2020/3/16	2021/3/15
Receiver	R&S	ESR7	102108	2020/4/22	2021/4/21
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2020/2/14	2021/2/12
Horn Antenna	ETS-Lindgren	3117	00218930	2020/12/1	2021/11/30
LF-AMP	Agilent	8447D	2944A10772	2020/2/11	2021/2/9
HF-AMP + AC source	EMCI	EMC051845SE	980633	2020/2/17	2021/2/15
HF-AMP + AC source	EMCI	EMC184045SE	980657	2020/2/17	2021/2/15
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2020/4/10	2021/4/9
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800056/4EA	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	804680/4	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37202/4	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800898/2EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800901/2EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801027/2EA	2020/4/22	2021/4/21
Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-087	2020/9/21	2021/9/20

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: CN21CT1R(LP0002-BLE) 001
Test Report No.

Seite 25 von 27
Page 25 of 27

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted emission as defined in LP0002 standard must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

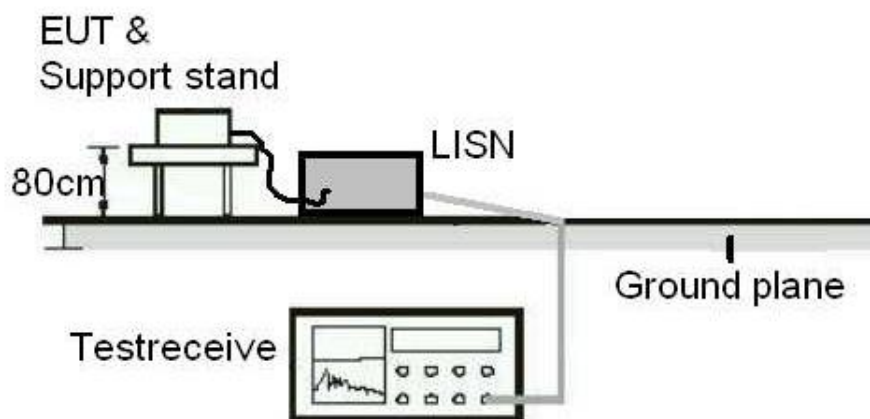

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
EMI Test Receiver	Rohde & Schwarz	ESR 7	102114	2020/04/13	2021/04/13
Two-Line V-Network (for EUT)	Rohde & Schwarz	ENV216	101262	2020/08/04	2021/08/04
Pulse Limiter	Schwarzbeck	VTSD 9561 F-N	00660	2020/02/24	2021/02/24
Test Software	Audix	e3	Ver. 9	N/A	N/A

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results


Please refer to Appendix B.

Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth

BLE_1M


Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	725.27	> 500	Pass
Middle Channel	2440	728.27	> 500	Pass
High Channel	2480	722.28	> 500	Pass

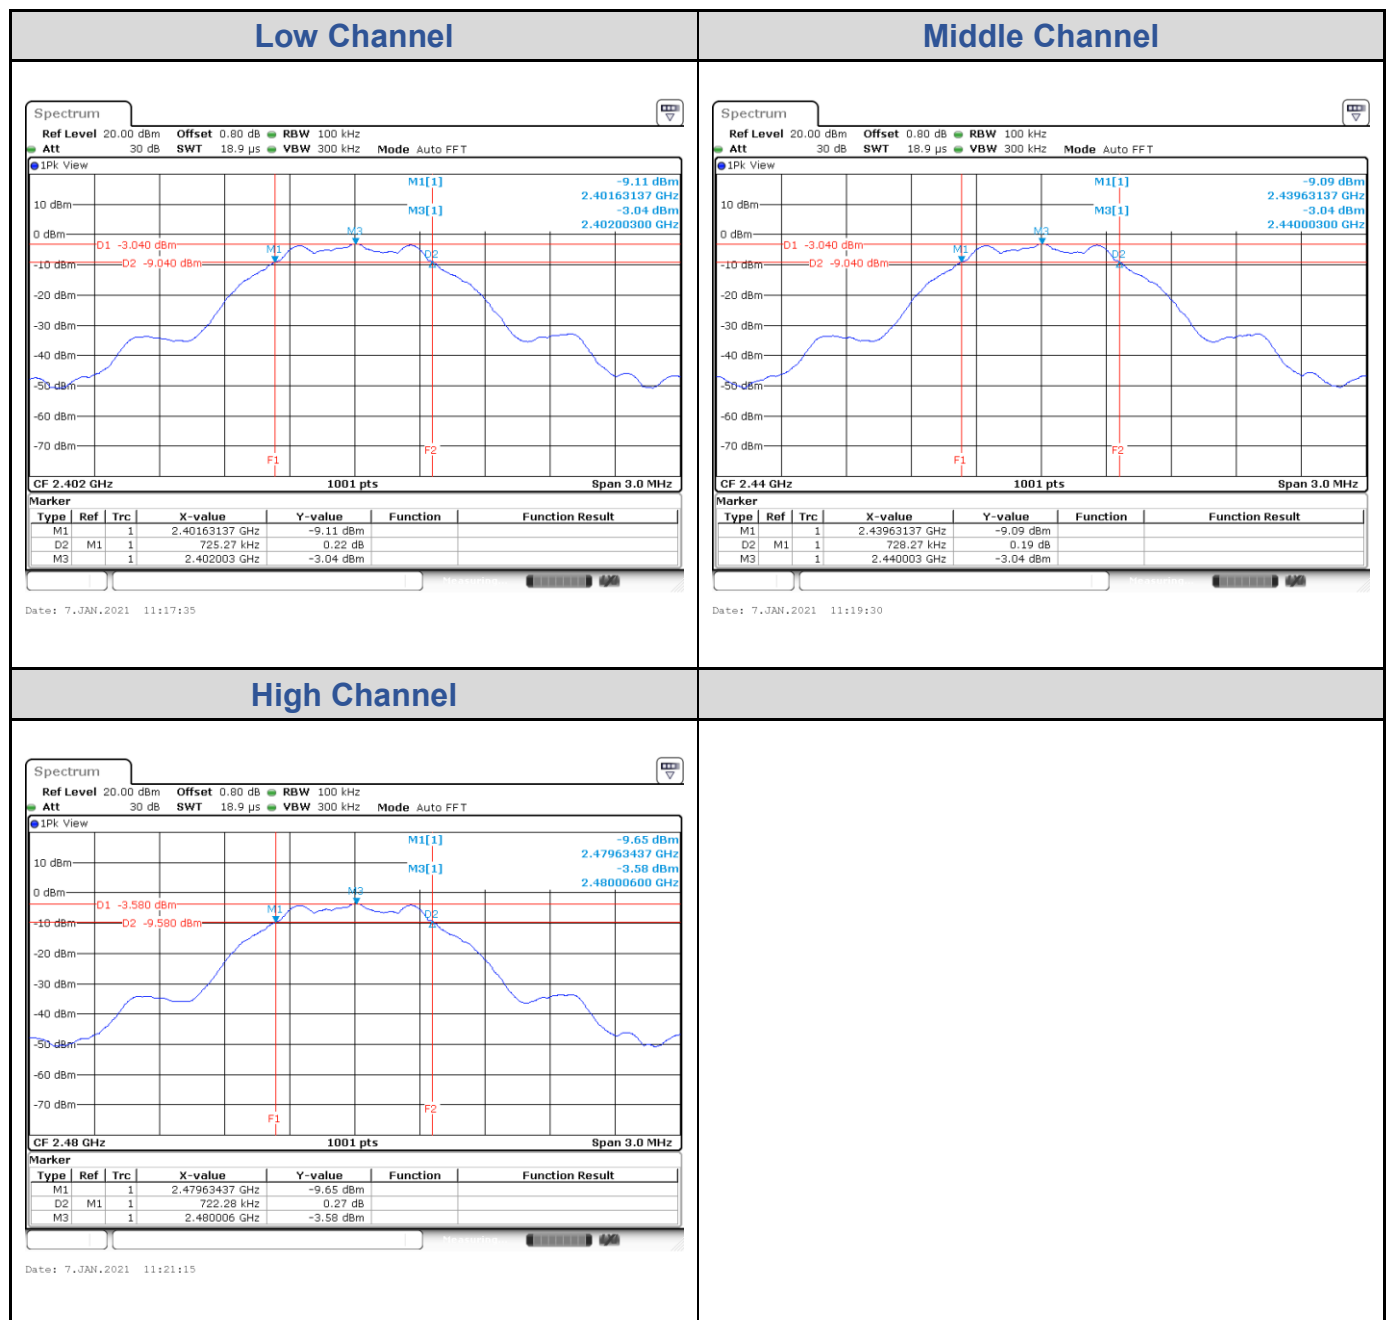


BLE_2M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	1263.74	> 500	Pass
Middle Channel	2440	1263.74	> 500	Pass
High Channel	2480	1258.74	> 500	Pass


Low Channel

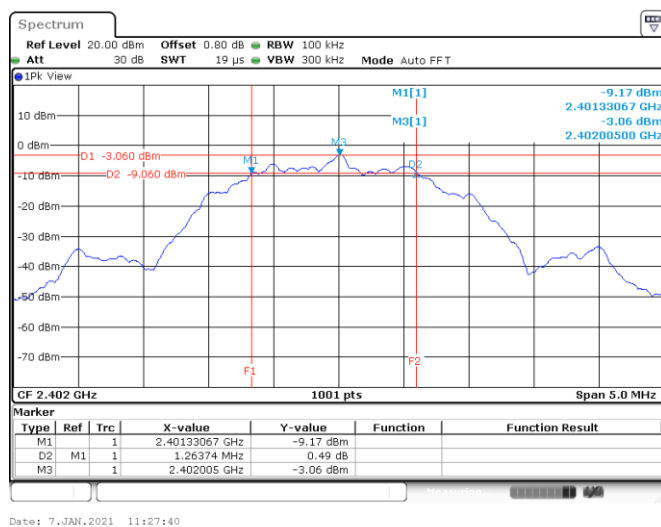

Middle Channel

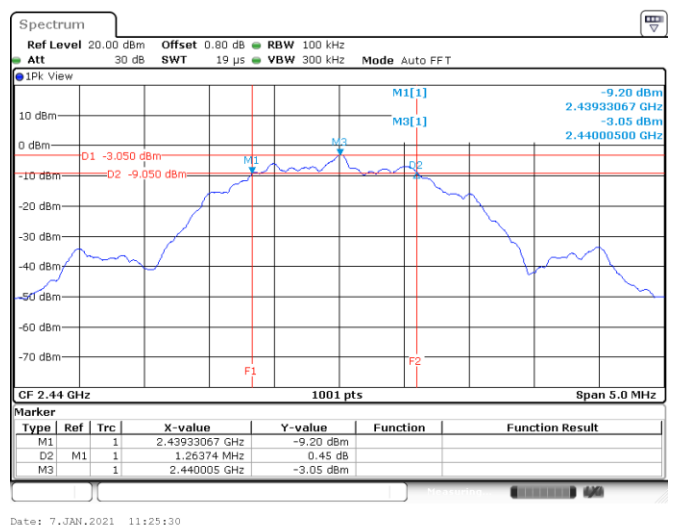

High Channel

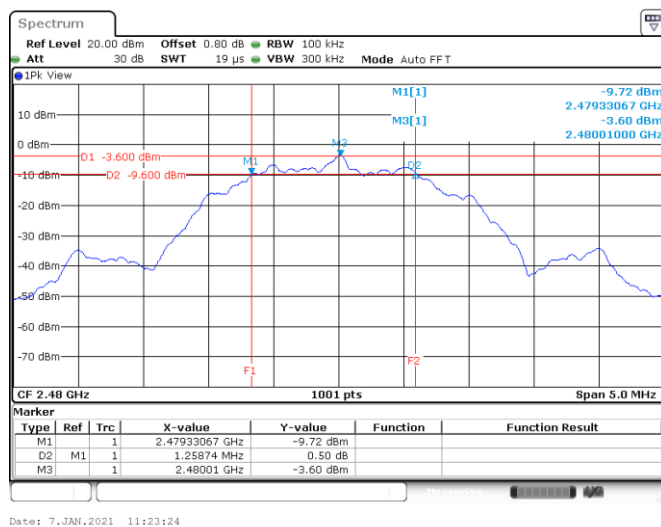


Test Result of Power Spectral Density

BLE_1M


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-18.03	8	Pass
Middle Channel	2440	-18.03	8	Pass
High Channel	2480	-18.58	8	Pass

Low Channel

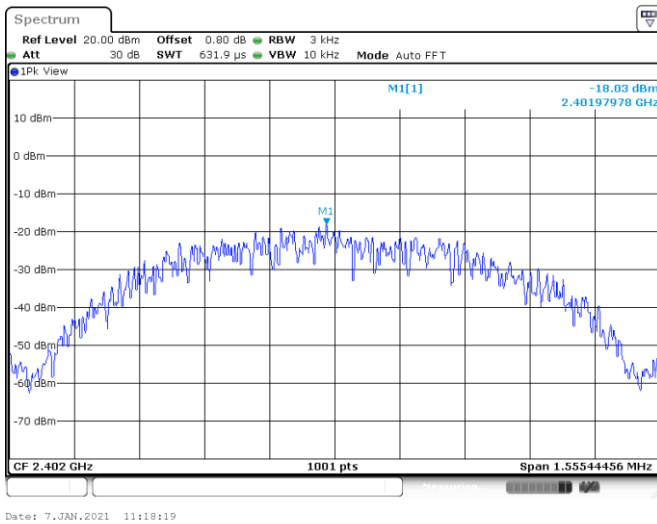


Date: 7.JAN.2021 11:18:19

Middle Channel

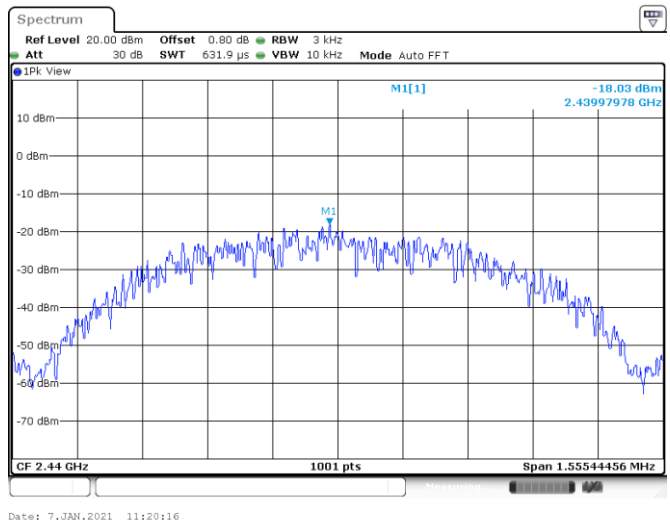

Date: 7.JAN.2021 11:20:16


High Channel

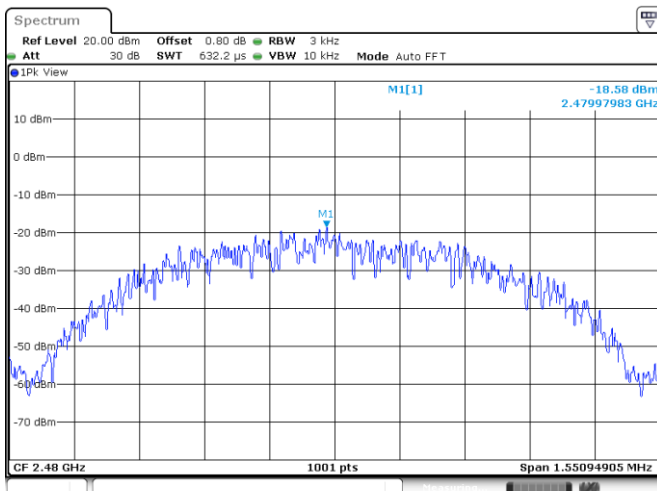

Date: 7.JAN.2021 11:22:08


BLE_2M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-20.97	8	Pass
Middle Channel	2440	-20.86	8	Pass
High Channel	2480	-21.39	8	Pass

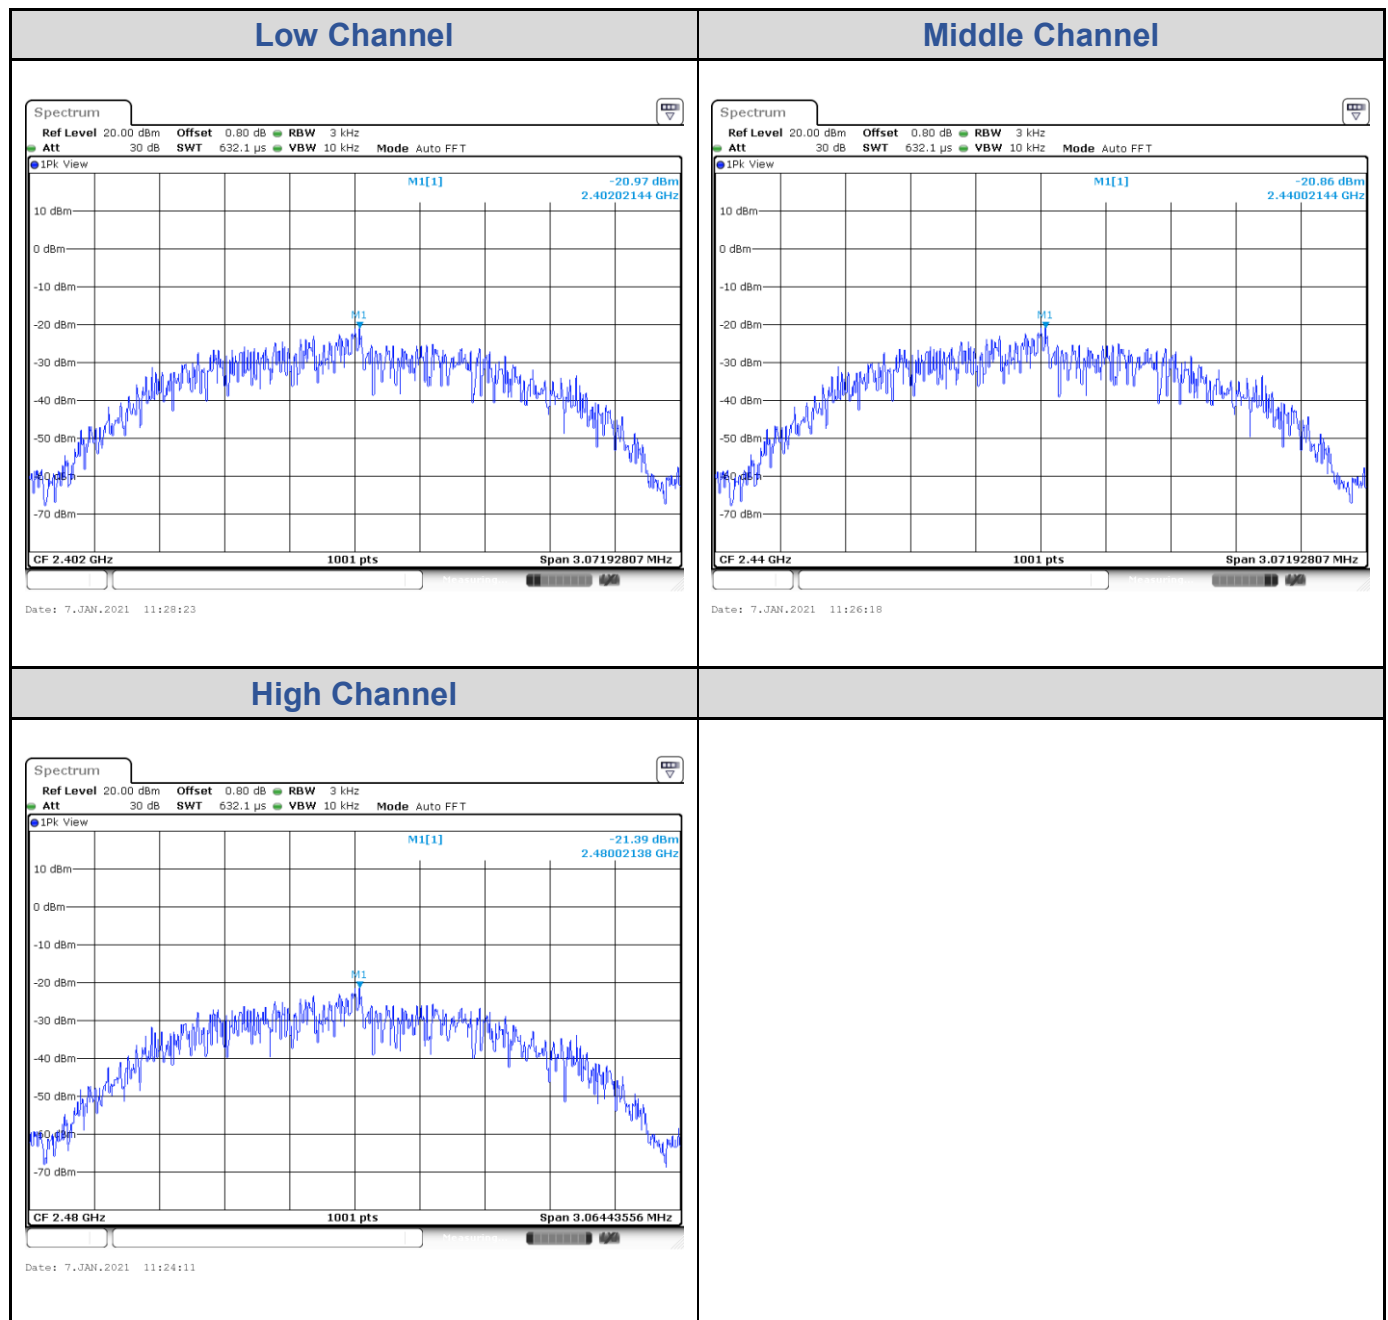


Test Result of Conducted Spurious Emissions, Tx Mode

BLE_1M

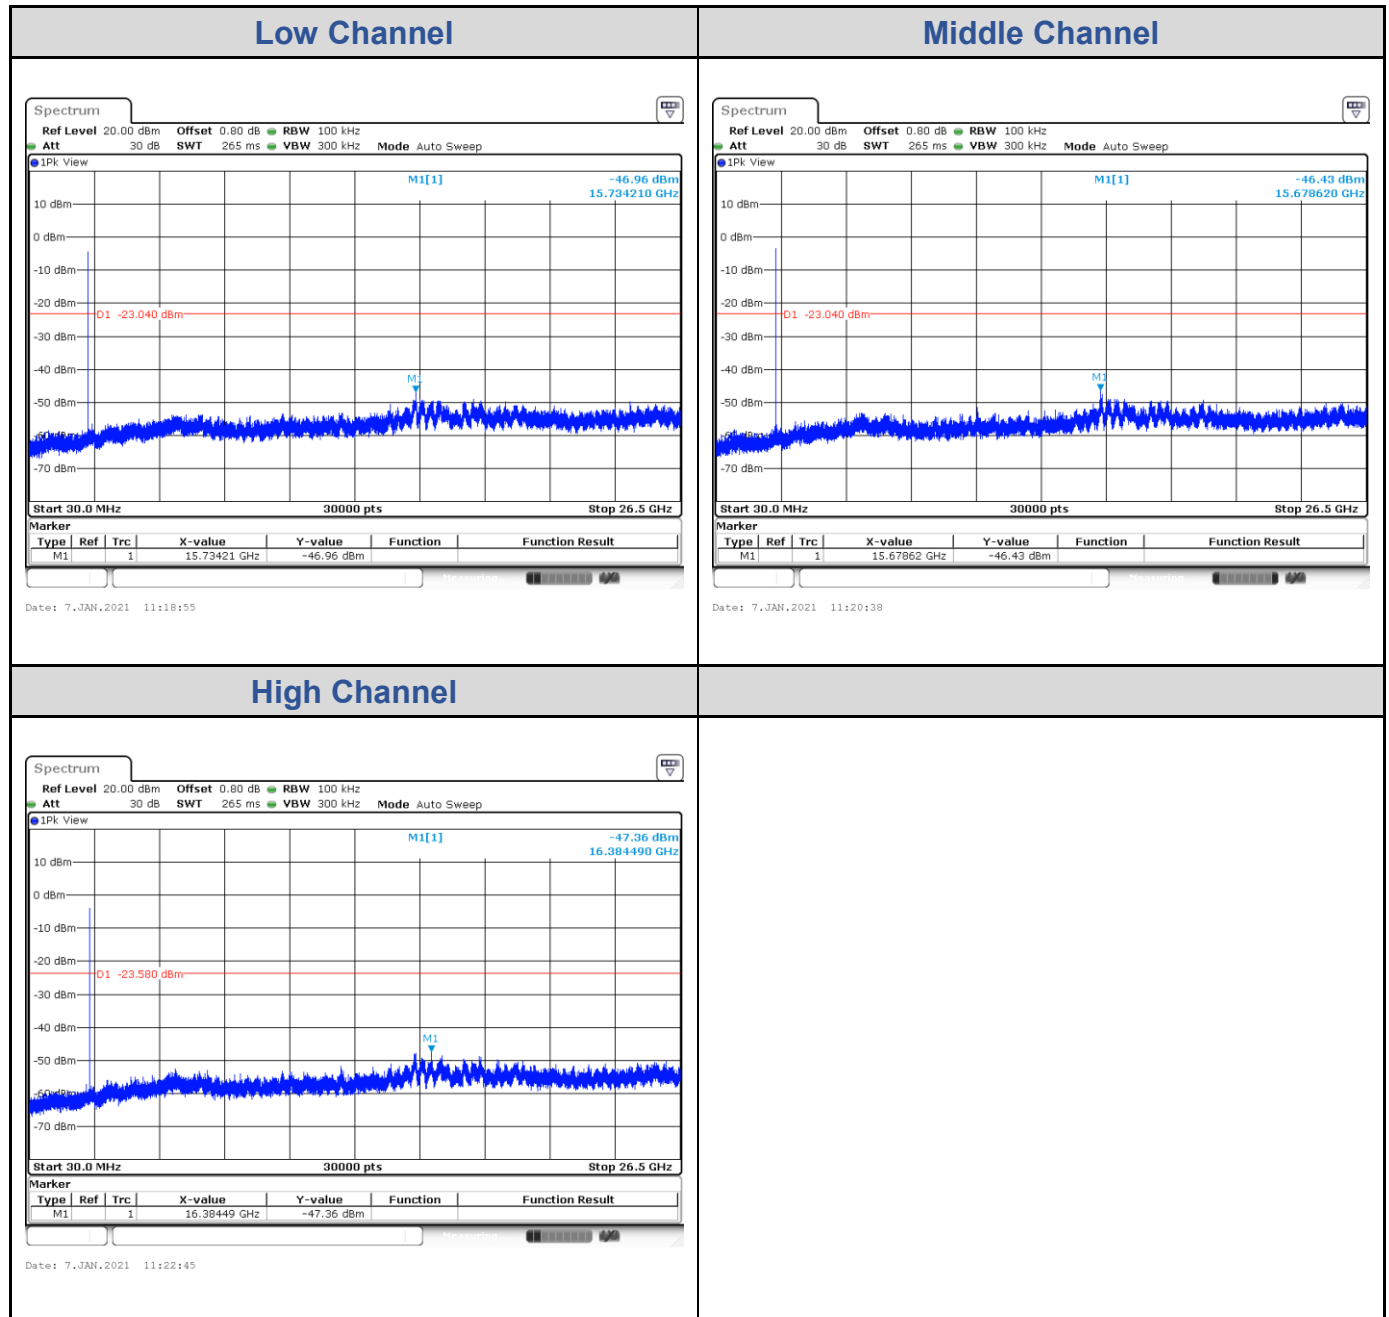


BLE_2M


Low Channel

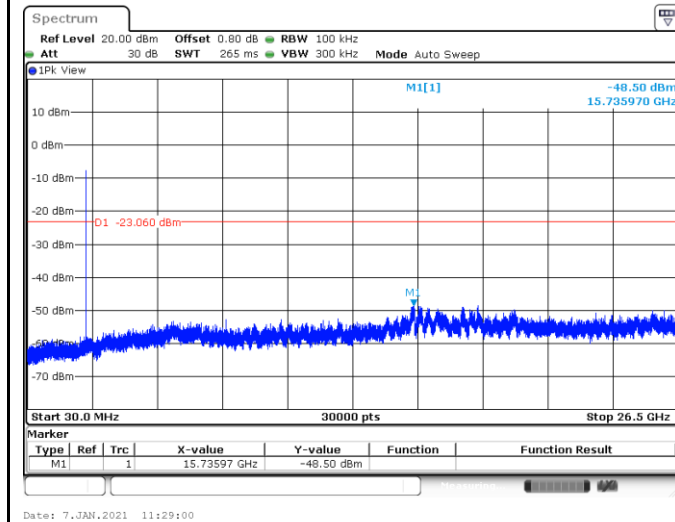

Middle Channel

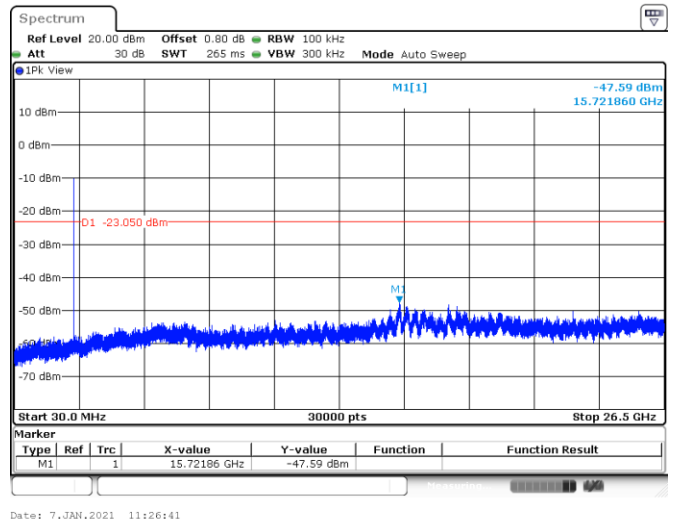


High Channel

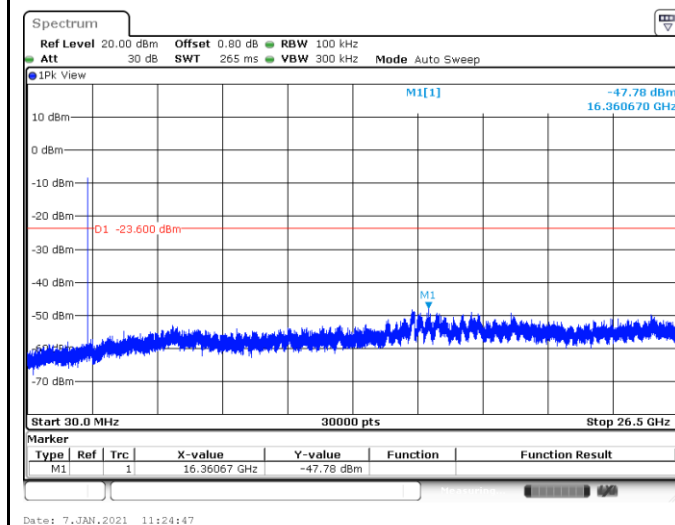


Test Result of Conducted Band Edge, Tx Mode

BLE_1M

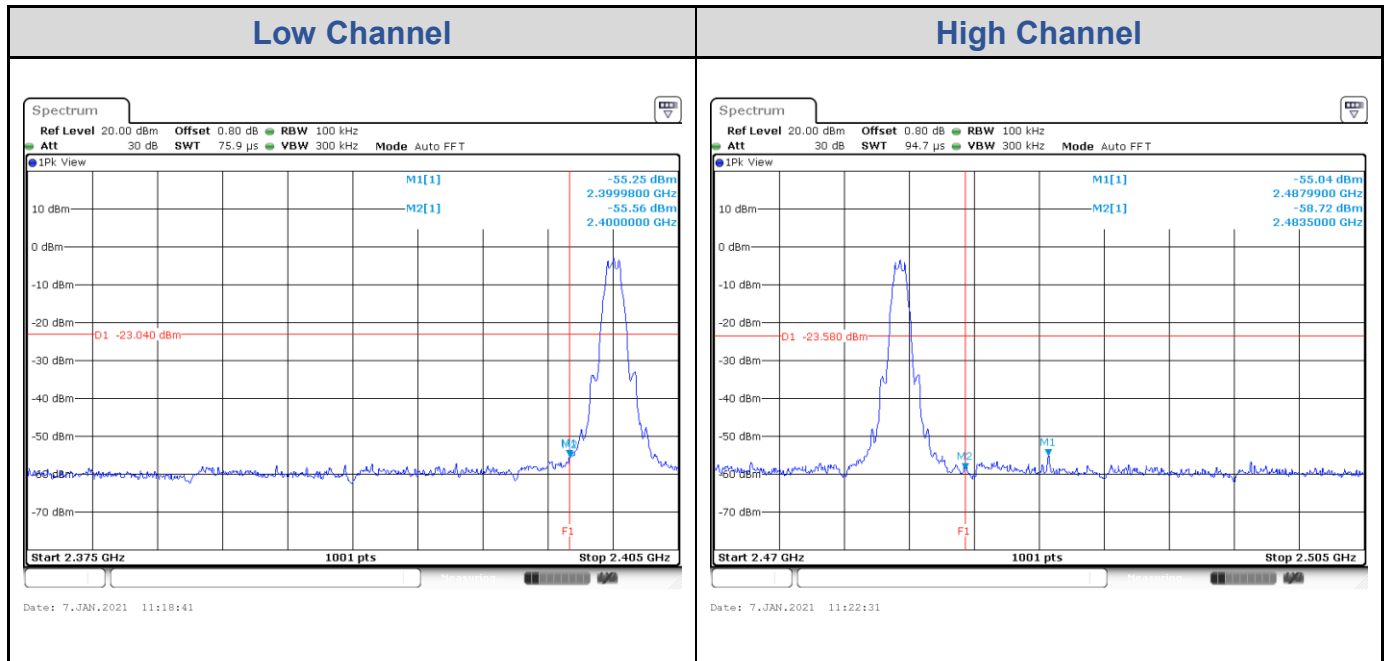

BLE_2M

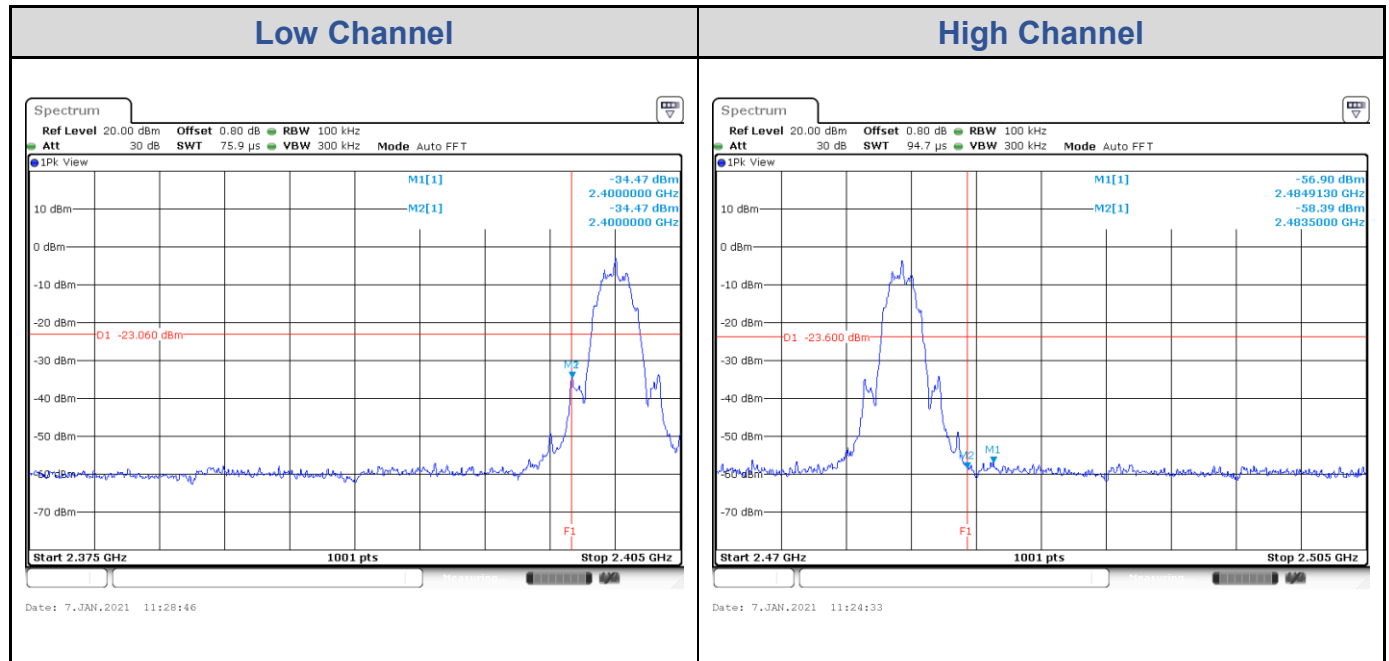

Appendix B: Test Results of Radiated Emissions & Mains Conducted Emission Test


Band Edges, 2.31GHz ~ 2.9GHz

BLE_1M

Low Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

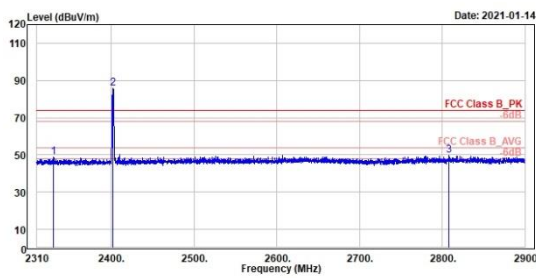


Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2329.55	48.69	14.92	33.68	74.00	-25.49	196	55	Peak	Horizontal		
2 *	2402.00	85.61	51.76	33.85	74.00	11.61	196	55	Peak	Horizontal		
3	2808.13	49.91	15.79	34.12	74.00	-24.09	106	55	Peak	Horizontal		

Low Channel (Vertical) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

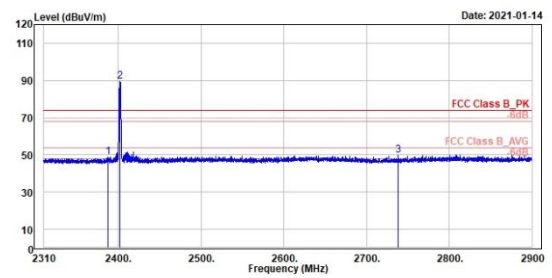


Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2387.59	48.75	14.92	33.83	74.00	-25.25	264	333	Peak	Vertical		
2 *	2402.00	89.23	55.38	33.85	74.00	15.23	264	333	Peak	Vertical		
3	2738.87	49.81	15.73	34.08	74.00	-24.19	264	333	Peak	Vertical		

BLE_1M

Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

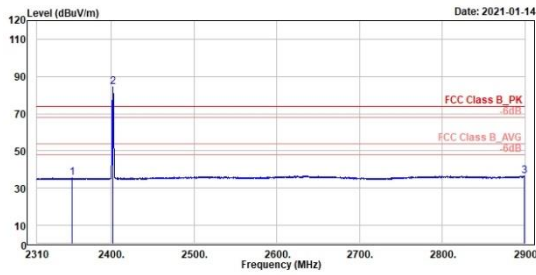


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2352.29	35.53	1.00	33.73	54.00	-18.47	106	55	Average	Horizontal	
2 *	2402.00	84.58	50.73	33.85	54.00	30.58	106	55	Average	Horizontal	
3	2899.53	36.66	2.23	34.43	54.00	-17.34	106	55	Average	Horizontal	

Low Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

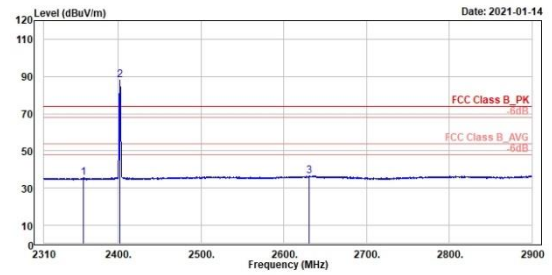

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2358.18	35.50	1.75	33.75	54.00	-18.50	264	333	Average	Vertical	
2 *	2402.00	88.18	54.25	33.93	54.00	34.18	264	333	Average	Vertical	
3	2630.38	36.49	2.27	34.22	54.00	-17.51	264	333	Average	Vertical	


BLE_1M

High Channel (Horizontal) Peak

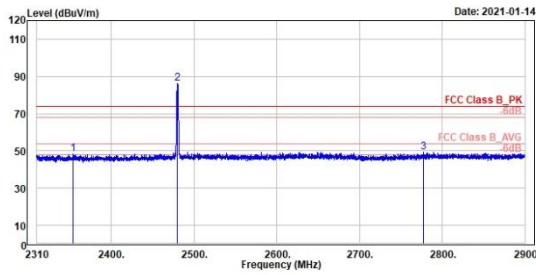

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2353.70	48.38	14.64	33.74	74.00	-25.62	105	59	Peak	Horizontal	
2 *	2488.00	86.01	52.03	33.98	74.00	12.01	105	59	Peak	Horizontal	
3	2777.74	49.44	15.35	34.09	74.00	-24.56	105	59	Peak	Horizontal	

High Channel (Vertical) Peak

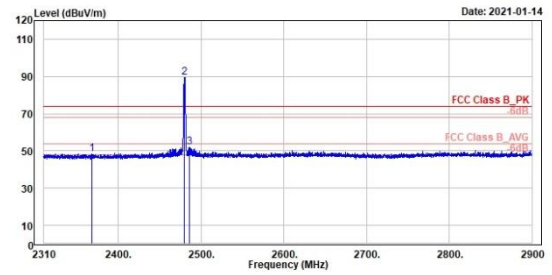


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2368.31	48.50	14.72	33.78	74.00	-25.50	304	338	Peak	Vertical	
2 *	2488.00	89.54	55.56	33.98	74.00	15.54	304	338	Peak	Vertical	
3	2486.21	51.67	17.89	33.98	74.00	-22.13	304	338	Peak	Vertical	

BLE_1M

High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

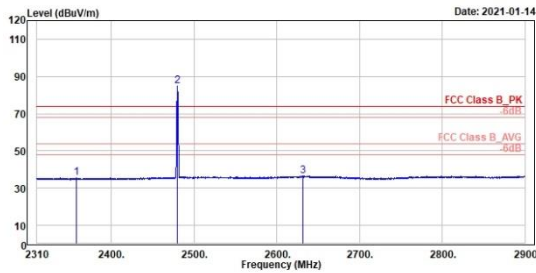


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2357.35	35.40	1.66	33.74	54.00	-18.60	105	59	Average	Horizontal	
2 *	2480.00	84.05	50.67	33.98	54.00	30.05	105	59	Average	Horizontal	
3	2632.03	36.58	2.37	34.21	54.00	-17.42	105	59	Average	Horizontal	

High Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

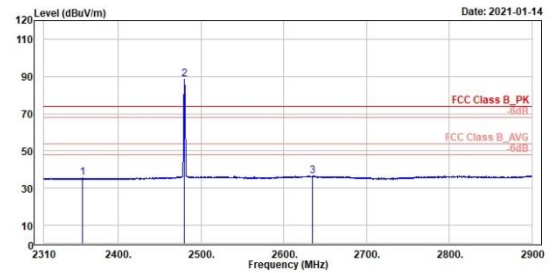


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2357.12	35.38	1.64	33.74	54.00	-18.62	304	338	Average	Vertical	
2 *	2480.00	80.53	54.55	33.98	54.00	34.53	304	338	Average	Vertical	
3	2634.86	36.54	2.34	34.20	54.00	-17.46	304	338	Average	Vertical	

BLE_2M

Low Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

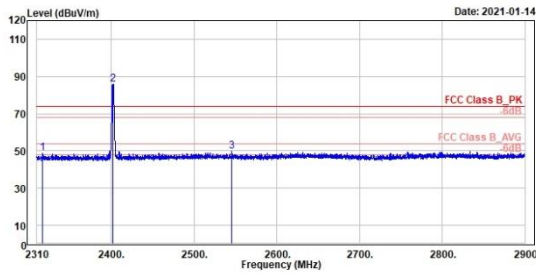

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2316.95	48.61	14.96	33.65	74.00	-25.39	105	58	Peak	Horizontal	
2 *	2402.00	85.73	51.88	33.85	74.00	11.73	105	58	Peak	Horizontal	
3	2545.34	49.60	15.41	34.19	74.00	-24.40	105	58	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

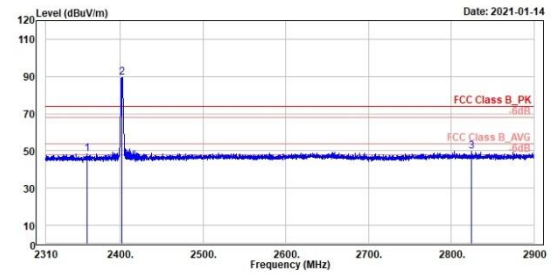


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2359.71	48.34	14.59	33.75	74.00	-25.66	264	334	Peak	Vertical	
2 *	2402.00	89.36	55.51	33.85	74.00	15.56	264	334	Peak	Vertical	
3	2824.97	49.64	15.48	34.16	74.00	-24.36	264	334	Peak	Vertical	

BLE_2M

Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

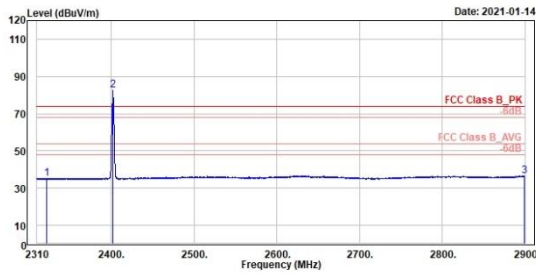


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2322.25	35.36	1.70	33.66	54.00	-18.64	105	58	Average	Horizontal	
2 *	2402.00	82.50	46.65	33.85	54.00	28.50	105	58	Average	Horizontal	
3	2899.53	36.57	2.14	34.43	54.00	-17.43	105	58	Average	Horizontal	

Low Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

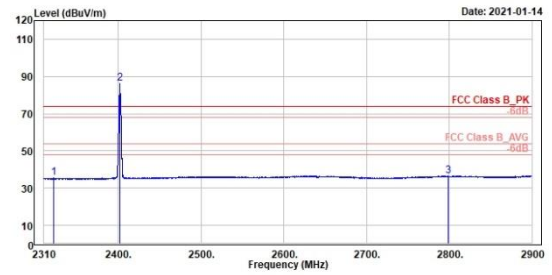

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2321.43	35.46	1.00	33.66	54.00	-18.54	264	334	Average	Vertical	
2 *	2402.00	86.30	52.45	33.85	54.00	32.30	264	334	Average	Vertical	
3	2799.17	36.60	2.50	34.10	54.00	-17.40	264	334	Average	Vertical	


BLE_2M

High Channel (Horizontal) Peak

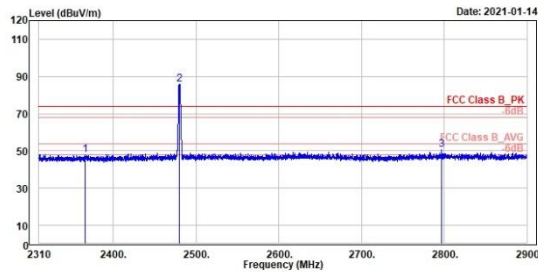

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2366.38	47.91	14.14	33.77	74.00	-26.09	185	59	Peak	Horizontal	
2 *	2488.00	86.00	52.02	33.98	74.00	12.00	185	59	Peak	Horizontal	
3	2797.17	50.83	16.73	34.10	74.00	-23.17	185	59	Peak	Horizontal	


High Channel (Vertical) Peak

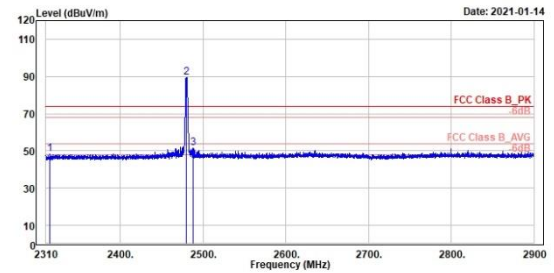

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2314.71	48.22	14.57	33.65	74.00	-25.78	304	337	Peak	Vertical	
2 *	2488.00	89.47	55.49	33.98	74.00	15.47	304	337	Peak	Vertical	
3	2487.62	51.73	17.74	33.99	74.00	-22.27	304	337	Peak	Vertical	


BLE_2M

High Channel (Horizontal) Average

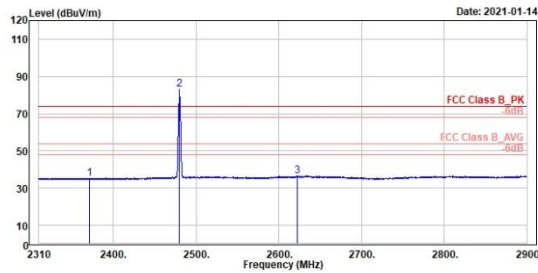

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2370.78	35.33	1.55	33.78	54.00	-18.67	105	59	Average	Horizontal	
2 *	2480.00	82.06	40.88	33.98	54.00	28.06	105	59	Average	Horizontal	
3	2622.85	36.60	2.36	34.24	54.00	-17.40	105	59	Average	Horizontal	

High Channel (Vertical) Average

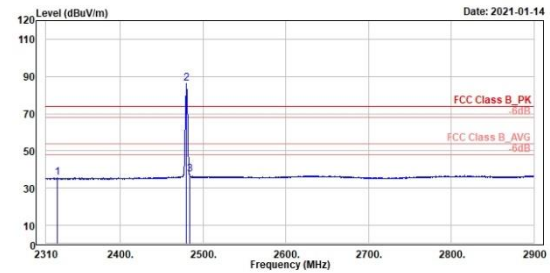

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2323.55	35.50	1.03	33.67	54.00	-18.50	304	337	Average	Vertical	
2 *	2480.00	86.45	52.47	33.98	54.00	32.45	304	337	Average	Vertical	
3	2483.50	37.33	3.35	33.98	54.00	-16.67	304	337	Average	Vertical	


Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

BLE_1M

Low Channel (Open) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

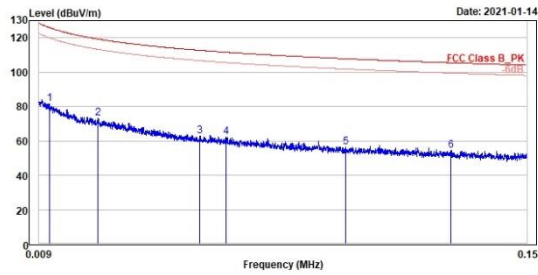

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	81.68	4.00	77.68	126.02	-44.42	100	22	QP	Open		
2	0.03	73.00	1.55	71.45	119.27	-46.27	100	12	QP	Open		
3	0.06	62.91	-1.36	64.27	112.70	-49.79	100	172	QP	Open		
4	0.06	62.20	-1.06	63.26	111.61	-49.41	100	189	QP	Open		
5	0.10	56.48	-3.06	59.54	107.81	-51.33	100	335	QP	Open		
6	0.13	54.57	-3.05	57.62	105.44	-50.87	100	3	QP	Open		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

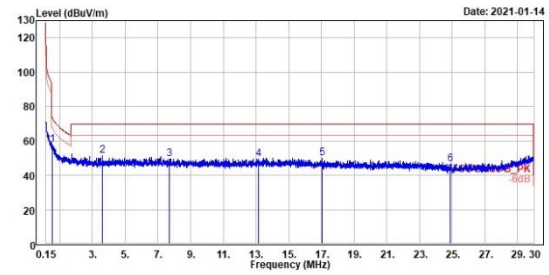


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.53	57.84	11.49	46.35	73.18	-15.34	100	46	QP	Open		
2	3.61	51.20	12.92	38.28	69.50	-18.30	100	99	QP	Open		
3	7.73	49.56	11.41	38.15	69.50	-19.94	100	233	QP	Open		
4	13.17	49.49	12.05	37.44	69.50	-20.01	100	0	QP	Open		
5	17.03	49.88	12.75	37.13	69.50	-19.62	100	227	QP	Open		
6	24.91	46.65	12.58	34.07	69.50	-22.85	100	253	QP	Open		

BLE_1M

Low Channel (Close) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

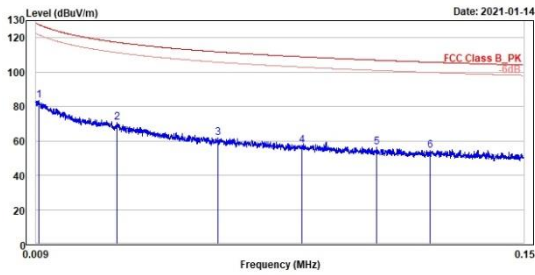

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	83.68	4.61	78.99	127.71	-44.11	100	288 QP	Close		
2	0.03	70.82	0.83	69.99	117.39	-46.57	100	57 QP	Close		
3	0.06	61.56	-1.87	63.43	111.79	-50.23	100	137 QP	Close		
4	0.09	57.54	-3.23	60.77	108.91	-51.37	100	90 QP	Close		
5	0.11	56.21	-2.61	58.82	106.97	-50.76	100	203 QP	Close		
6	0.12	54.22	-3.70	57.92	105.81	-51.59	100	261 QP	Close		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

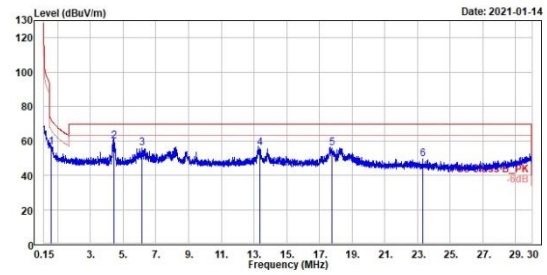

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.61	56.53	11.53	45.00	71.90	-15.37	100	102 QP	Close		
2	4.45	59.93	21.59	38.34	69.50	-9.57	100	185 QP	Close		
3	6.15	55.65	17.29	38.36	69.50	-13.85	100	128 QP	Close		
4	13.36	55.85	18.38	37.47	69.50	-13.65	100	87 QP	Close		
5	17.79	55.95	19.05	36.90	69.50	-13.55	100	233 QP	Close		
6	23.35	49.39	14.05	35.34	69.50	-20.11	100	316 QP	Close		

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

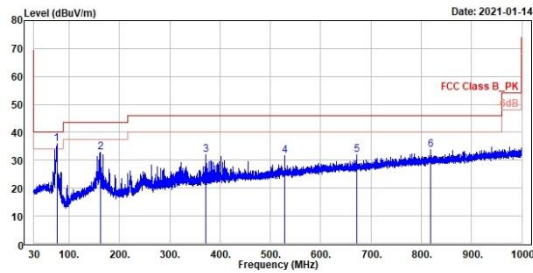

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	75.59	35.87	47.09	-11.22	40.00	-4.13	400	288	QP	Horizontal		
2	162.31	32.81	40.16	-7.35	43.50	-10.69	200	314	QP	Horizontal		
3	372.02	31.91	37.05	-5.14	46.00	-14.09	100	204	QP	Horizontal		
4	528.10	31.55	34.24	-2.69	46.00	-14.45	200	99	QP	Horizontal		
5	672.04	31.91	32.27	-0.36	46.00	-14.09	100	357	QP	Horizontal		
6	818.22	33.69	31.60	2.09	46.00	-12.31	400	106	QP	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

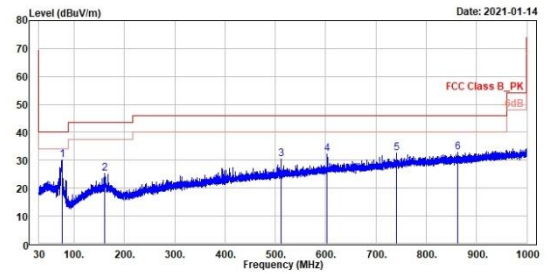

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	75.69	30.20	41.44	-11.24	40.00	-9.80	303	360	QP	Vertical		
2	159.98	25.31	32.76	-7.45	43.50	-18.19	100	219	QP	Vertical		
3	511.99	30.47	33.39	-2.92	46.00	-15.53	100	98	QP	Vertical		
4	603.46	32.17	33.36	-1.19	46.00	-13.83	100	31	QP	Vertical		
5	741.11	32.64	31.67	0.97	46.00	-13.36	300	160	QP	Vertical		
6	862.55	32.90	30.33	2.57	46.00	-13.10	150	360	QP	Vertical		


Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz

BLE_1M


Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

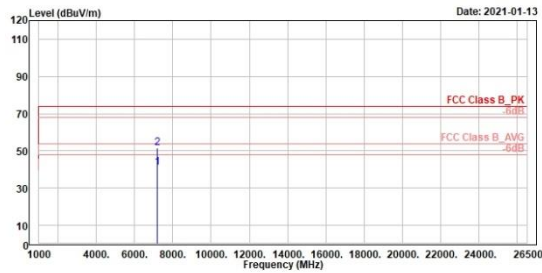

TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

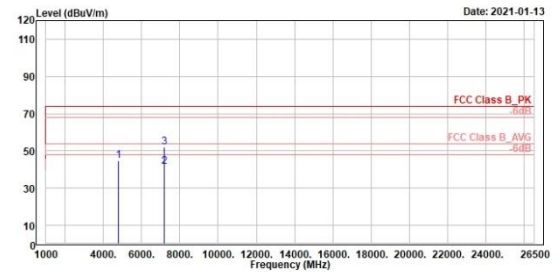


BLE_1M


Middle Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

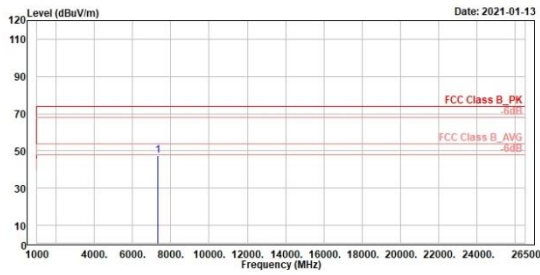


TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

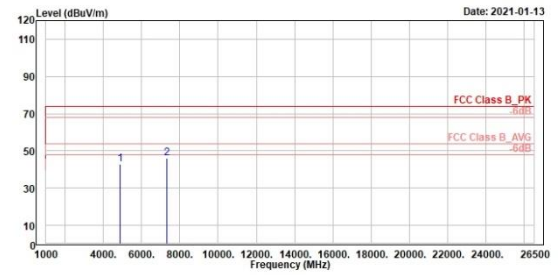

BLE_1M
High Channel (Horizontal)

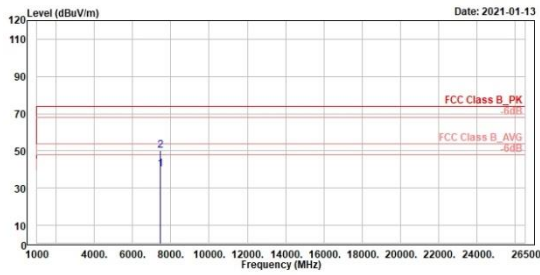 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

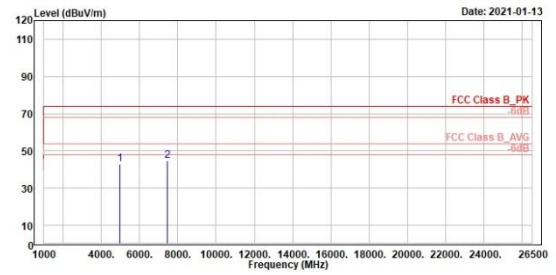High Channel (Vertical)


 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


BLE_2M


Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

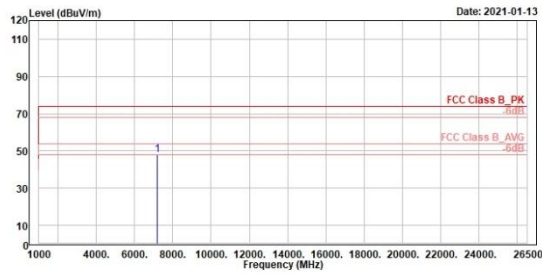

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

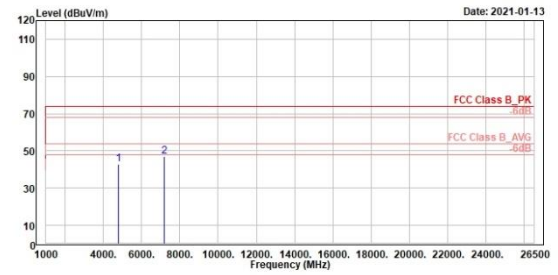


BLE_2M


Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

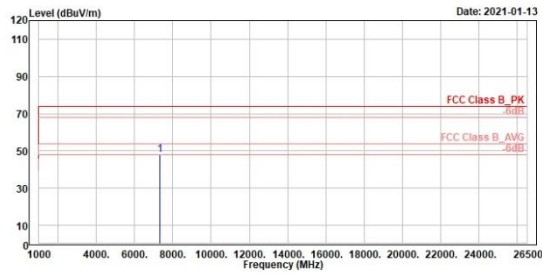

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

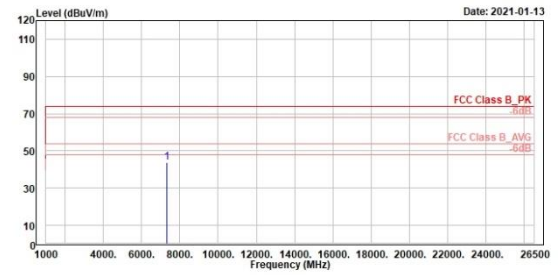


BLE_2M


High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

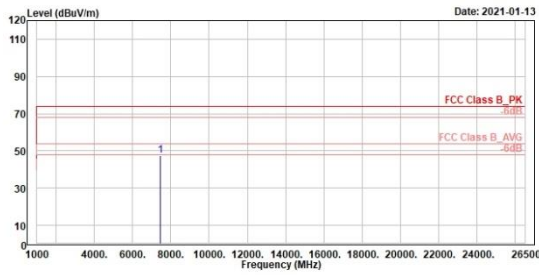

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

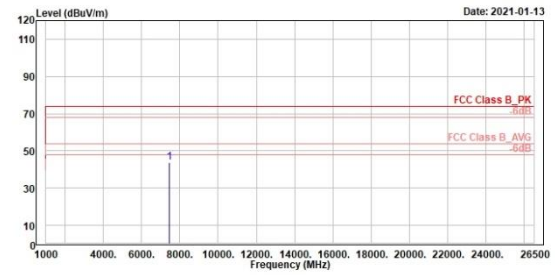


Spurious Emissions, Rx Mode, 9kHz ~ 30MHz

BLE_1M

Low Channel (Open) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

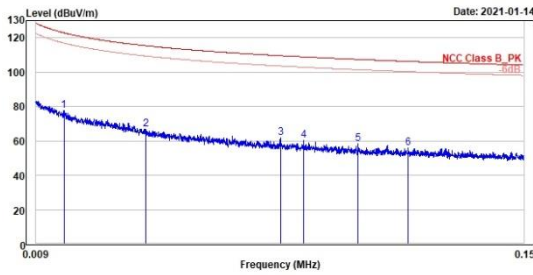

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.02	77.54	3.17	74.37	122.93	-45.39	100	53 QP	Open		
2	0.04	66.82	-0.53	67.35	115.38	-48.56	100	2 QP	Open		
3	0.08	61.74	0.45	61.29	109.57	-47.83	100	162 QP	Open		
4	0.09	60.06	-0.68	60.74	108.87	-48.81	100	139 QP	Open		
5	0.10	58.32	-0.81	59.13	107.42	-49.10	100	271 QP	Open		
6	0.12	55.78	-2.51	58.29	106.27	-50.49	100	188 QP	Open		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

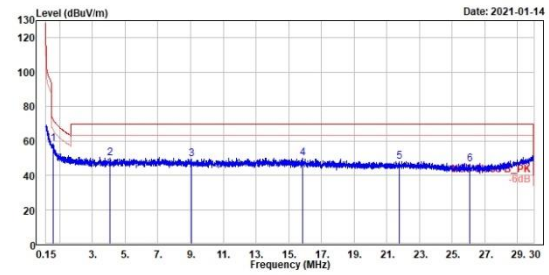


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.61	58.52	13.60	44.92	71.86	-13.34	100	4 QP	Open		
2	4.07	49.73	11.40	38.33	69.50	-19.77	100	325 QP	Open		
3	9.06	49.61	11.84	37.77	69.50	-19.89	100	216 QP	Open		
4	15.84	49.93	12.37	37.56	69.50	-19.57	100	230 QP	Open		
5	21.78	48.17	12.26	35.91	69.50	-21.33	100	123 QP	Open		
6	26.10	46.36	12.06	34.30	69.50	-23.14	100	288 QP	Open		

BLE_1M

Low Channel (Close) 9kHz~150kHz



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

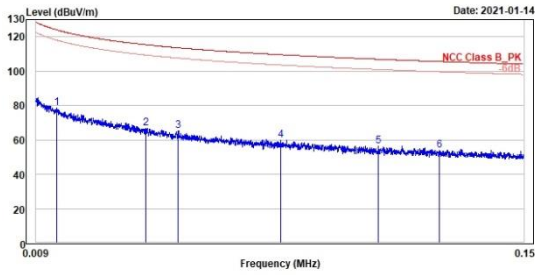


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.02	78.50	2.81	75.69	124.06	-45.56	100	126 QP	Close	
2	0.04	66.90	-0.48	67.38	115.40	-48.50	100	74 QP	Close	
3	0.05	65.10	0.08	65.02	113.58	-48.48	100	340 QP	Close	
4	0.08	60.03	-1.25	61.28	109.57	-49.54	100	358 QP	Close	
5	0.11	56.28	-2.51	58.79	106.93	-50.65	100	245 QP	Close	
6	0.13	54.88	-3.68	57.76	105.62	-51.54	100	161 QP	Close	

Low Channel (Close) 150kHz~30MHz



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

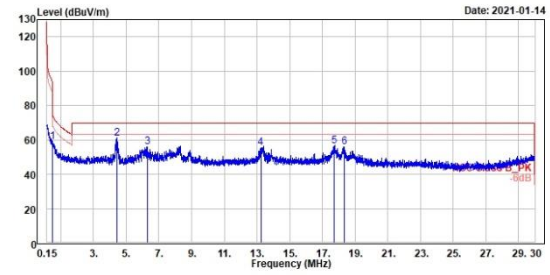

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.51	59.03	12.34	46.69	73.53	-14.50	100	303 QP	Close	
2	4.45	60.58	22.25	38.33	69.50	-8.92	100	166 QP	Close	
3	6.31	55.91	17.56	38.35	69.50	-13.59	100	60 QP	Close	
4	13.23	55.13	17.67	37.46	69.50	-14.37	100	20 QP	Close	
5	17.72	56.51	19.59	36.92	69.50	-12.99	100	109 QP	Close	
6	18.36	55.65	18.94	36.71	69.50	-13.85	100	65 QP	Close	

Spurious Emissions, Rx Mode, 30MHz ~ 1GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

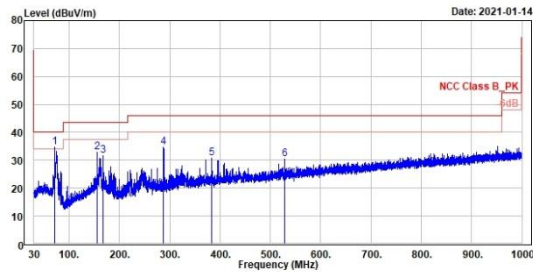

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	72.00	34.75	45.23	-10.48	40.00	-5.25	100	100	QP	horizontal		
2	156.10	32.67	40.45	-7.58	43.50	-10.63	200	167	QP	horizontal		
3	168.03	31.68	38.88	-7.20	43.50	-11.82	200	146	QP	horizontal		
4	288.02	34.60	41.33	-6.73	46.00	-11.40	100	181	QP	horizontal		
5	384.05	30.69	35.63	-4.94	46.00	-15.31	100	181	QP	horizontal		
6	528.10	30.36	33.05	-2.69	46.00	-15.64	200	80	QP	horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

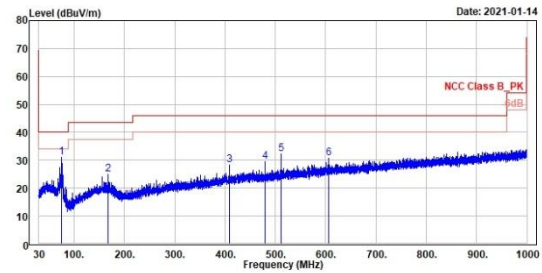

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	75.30	30.90	42.06	-11.16	40.00	-9.10	200	216	QP	vertical		
2	168.03	24.89	32.09	-7.20	43.50	-18.61	200	268	QP	vertical		
3	408.01	28.43	32.95	-4.52	46.00	-17.57	200	246	QP	vertical		
4	480.08	29.58	33.15	-3.57	46.00	-16.42	100	359	QP	vertical		
5	511.99	32.17	35.09	-2.92	46.00	-13.83	100	162	QP	vertical		
6	606.67	30.80	31.67	-1.07	46.00	-15.20	100	250	QP	vertical		


Spurious Emissions, Rx Mode, 1GHz ~ 26.5GHz

BLE_1M

Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

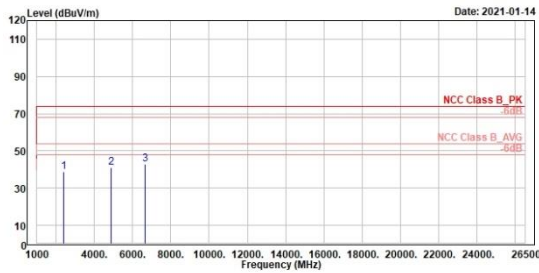


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2383.00	38.82	53.10	-14.28	74.00	-35.18	180	47	Peak	horizontal	
2	4861.00	41.27	51.23	-9.96	74.00	-32.73	280	249	Peak	horizontal	
3	6646.00	43.00	50.67	-7.67	74.00	-31.00	400	7	Peak	horizontal	

Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

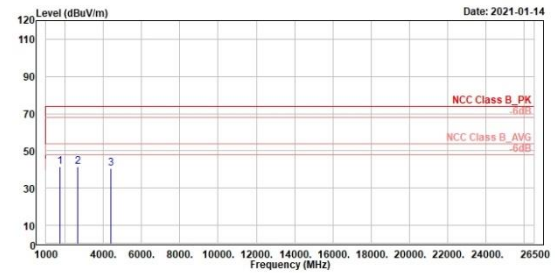

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	1725.00	41.52	58.96	-17.44	74.00	-32.48	111	360	Peak	vertical	
2	2658.00	41.57	55.34	-13.77	74.00	-32.43	280	136	Peak	vertical	
3	4406.00	40.67	51.24	-10.57	74.00	-33.33	235	0	Peak	vertical	

Mains Conducted Emission, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)



TUV Rheinland Taiwan Ltd(New Taipei City Branch),
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

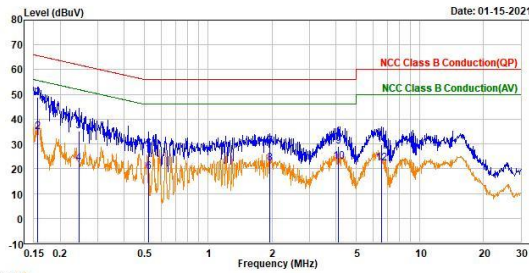


Trace: 1

	Freq	Read Level	Factor	Level	Limit	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.157	39.23	9.66	48.89	65.63	-16.74	QP	line1	
2	0.157	25.26	9.66	34.92	55.63	-20.71	Average	line1	
3	0.244	25.67	9.65	35.32	61.94	-26.62	QP	line1	
4	0.244	12.39	9.65	22.04	51.94	-29.90	Average	line1	
5	0.524	18.06	9.65	27.71	56.00	-28.29	QP	line1	
6	0.524	9.09	9.65	18.74	46.00	-27.26	Average	line1	
7	1.954	19.24	9.68	28.92	56.00	-27.08	QP	line1	
8	1.954	12.44	9.68	22.12	46.00	-23.88	Average	line1	
9	4.127	19.32	9.70	29.02	56.00	-26.98	QP	line1	
10	4.127	13.10	9.70	22.80	46.00	-23.20	Average	line1	
11	6.560	19.91	9.74	29.65	60.00	-30.35	QP	line1	
12	6.560	12.44	9.74	22.18	50.00	-27.82	Average	line1	



TUV Rheinland Taiwan Ltd(New Taipei City Branch),
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

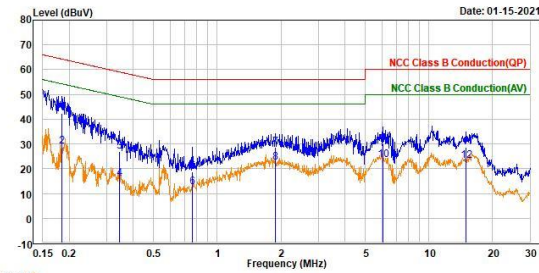

Trace: 1

	Freq	Read Level	Factor	Level	Limit	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.185	32.80	9.67	42.47	64.26	-21.79	QP	neutral	
2	0.185	19.32	9.67	28.99	54.26	-25.27	Average	neutral	
3	0.345	17.39	9.65	27.04	59.09	-32.05	QP	neutral	
4	0.345	6.48	9.65	16.13	49.09	-32.96	Average	neutral	
5	0.762	9.20	9.68	18.88	56.00	-37.12	QP	neutral	
6	0.762	2.83	9.68	12.51	46.00	-33.49	Average	neutral	
7	1.877	19.03	9.70	28.73	56.00	-27.27	QP	neutral	
8	1.877	12.65	9.70	22.35	46.00	-23.65	Average	neutral	
9	6.087	20.32	9.74	30.06	60.00	-29.94	QP	neutral	
10	6.087	13.83	9.74	23.57	50.00	-26.43	Average	neutral	
11	15.005	18.81	9.82	28.63	60.00	-31.37	QP	neutral	
12	15.005	13.34	9.82	23.16	50.00	-26.84	Average	neutral	