

NCC Test Report

Equipment : Wireless gateway
Brand Name : PHILIPS
Model Name : LCN1870/05
Applicant : 台灣昕諾飛股份有限公司
台北市南港區 115 園區街 3-1 號 15 樓之 1
Manufacturer : Signify (China) Investment Co., Ltd.
Building 9, Lane 888, Tianlin Road,
Minhang District, Shanghai 200233 China
Standard : LP0002 Section 3.10 (2018-01-10)

The product was received on Oct. 19, 2017, and testing was started from Nov. 09, 2017 and completed on Mar. 17, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Location Information	7
1.3 Measurement Uncertainty	7
2 TEST CONFIGURATION OF EUT.....	8
2.1 Test Condition	8
2.2 Test Channel Mode	8
2.3 The Worst Case Measurement Configuration.....	9
2.4 Accessories	10
2.5 Support Equipment.....	10
2.6 Test Setup Diagram	11
3 TRANSMITTER TEST RESULT	13
3.1 AC Power-line Conducted Emissions	13
3.2 DTS Bandwidth.....	14
3.3 Maximum Conducted Output Power	15
3.4 Power Spectral Density	17
3.5 Emissions in Non-restricted Frequency Bands	18
3.6 Emissions in Restricted Frequency Bands.....	19
3.7 Receiver Radiated Spurious Emissions	23
3.8 Maximum Permissible Exposure	26
4 TEST EQUIPMENT AND CALIBRATION DATA	27
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF DTS BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	
APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS	
APPENDIX G. TEST RESULTS OF RECEIVER RADIATED UNWANTED EMISSIONS	
APPENDIX H. TEST RESULTS OF MAXIMUM PERMISSIBLE EXPOSURE	
APPENDIX I. TEST PHOTOS	
PHOTOGRAPHS OF EUT V02	



TEL : 886-3-3273456
FAX : 886-3-3270973
Report Template No.: HE1-C8 Ver2.0

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	3.10.1.4	Antenna Requirement	PASS	-
3.1	2.3	AC Power-line Conducted Emissions	PASS	-
3.2	3.10.1.6	DTS Bandwidth	PASS	-
3.3	3.10.1.2	Maximum Conducted Output Power	PASS	-
3.4	3.10.1.6	Power Spectral Density	PASS	-
3.5	3.10.1.5	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	3.10.1.5	Emissions in Restricted Frequency Bands	PASS	-
3.7	2.11	Receiver Radiated Unwanted Emissions	PASS	-
3.8	5.20	Maximum Permissible Exposure	PASS	-

Note1: Authorized by Original Applicant to use the report test data, therefore test results refer to the original report. From Sporton Project No.: TR7O1918-02AC.

Note 2: The conducted power was verified, and the deviation between the result of verification and original power is within 2dB, therefore test results refer to the original report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

None

Reviewed by: Ben Tseng

Report Producer: Yunha Liou

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	1TX
2.4-2.4835GHz	802.11g	20	1TX
2.4-2.4835GHz	802.11n HT20	20	1TX
2.4-2.4835GHz	802.11n HT40	40	1TX

Note:

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector
1	-	-	Printed PIFA Antenna	Murata
2	-	-	Printed PIFA Antenna	Murata

Ant.	Gain (dBi)		
	2.4G	BT	ZigBee
1	2.4	-	-
2	-	1.7	1.7

Note 1: The EUT has two antennas.

For 2.4GHz function:

Only Ant. 1 can be used as transmitting/receiving antenna.

For Bluetooth / ZigBee function:

Only Ant. 2 can be used as transmitting/receiving antenna.

1.1.3 EUT Information

Identify EUT			
WiFi Chip	Brand: QUALCOMM / Model Name: QCA4531		
Operational Condition			
EUT Power Type	From AC Adapter		
Beamforming Function	☐ With beamforming	☒ Without beamforming	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:	...	
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:	...	
☐	Other:		

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11b	1	0	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11g	0.974	0.114	2.025m	1k
802.11n HT20	0.973	0.119	1.889m	1k
802.11n HT40	0.959	0.182	929.375u	3k

1.1.5 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ LP0002 (2018-01-10)
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 v05r02
- ♦ ANSI C63.4-2014
- ♦ KDB 414788 D01 v01r01

1.2 Testing Location Information

Testing Location					
☒	HWA YA	ADD	:	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL	:	886-3-327-3456	FAX : 886-3-327-0973
☐	JHUBEI	ADD	:	No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)	
		TEL	:	886-3-656-9065	FAX : 886-3-656-9085
☒	Wen Shan	ADD	:	No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)	
		TEL	:	886-3-318-0787	FAX : 886-3-318-0287

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Tim	24.3°C / 65.2%	09/Nov/2017
Radiated(TX)	03CH09-HY	Eric	23°C / 60%	16/Nov/2017
Radiated(RX)	03CH09-HY	Daniel	21.7~22.5°C / 44~49%	17/Mar/2020
AC Conduction(TX)	CO04-HY	Thor Wei	23°C /60%	10/Nov/2017
AC Conduction(RX)	CO04-HY	Jeff	21.4~25.3°C / 51~60%	17/Mar/2020

1.3 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	2.1 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	2.6 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	2.9 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

2.2 Test Channel Mode

Test Software Version	CART 4.9
-----------------------	----------

Mode	Power Setting
802.11b_Nss1,(1Mbps)_1TX	-
2412MHz	16.5
2437MHz	17
2462MHz	17.5
802.11g_Nss1,(6Mbps)_1TX	-
2412MHz	17
2437MHz	21.5
2462MHz	18
802.11n HT20_Nss1,(MCS0)_1TX	-
2412MHz	16
2437MHz	21.5
2462MHz	17.5
802.11n HT40_Nss1,(MCS0)_1TX	-
2422MHz	14
2437MHz	17
2452MHz	14.5

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX/CRX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands Receiver Radiated Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX/CRX		
1	Adapter mode		
Operating Mode > 1GHz	CTX/CRX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	

2.4 Accessories

Accessories				
AC Adapter	Brand Name	PHILIPS	Model Name	S005BMM0500100
	Power Rating	I/P: 100 - 240Vac, 300m A, O/P: 5 Vdc, 5 W		
	Power Cord	1.5 meter, Non-Shielded cable, w/o ferrite core		

2.5 Support Equipment


Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for NB	DELL	HA65NM130	DoC
3	AC Source	G.W	APS-9102	-

Support Equipment - AC Conduction / Radiated				
No.	Equipment	Brand Name	Model Name	FCC ID
1	RJ-45 cable X2	Power sync	CAT-6E-01	DOC
2	Load	Sporton	-	-

Note: No.1, 2 was provided by sporton Lab. The applicant has signed the recognizance that the equipment will not be sold with the accessory.


2.6 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test (TX)

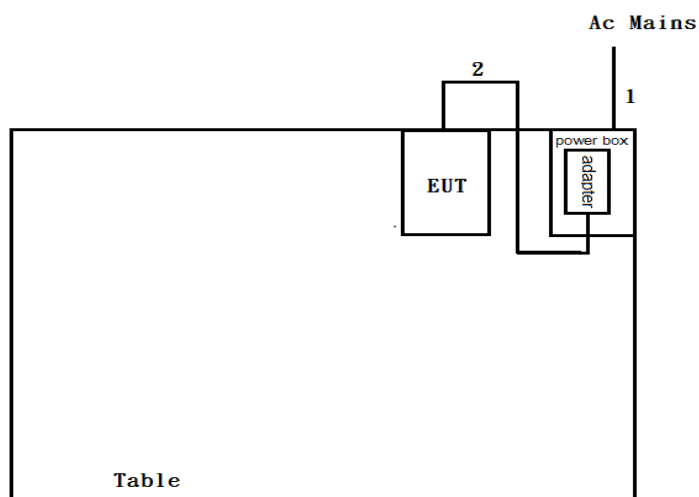


Item	Connection	Shielded	Length
1	AC power line	No	1.7m
2	DC power line	No	1.5m


Test Setup Diagram – AC Line Conducted Emission Test (RX)

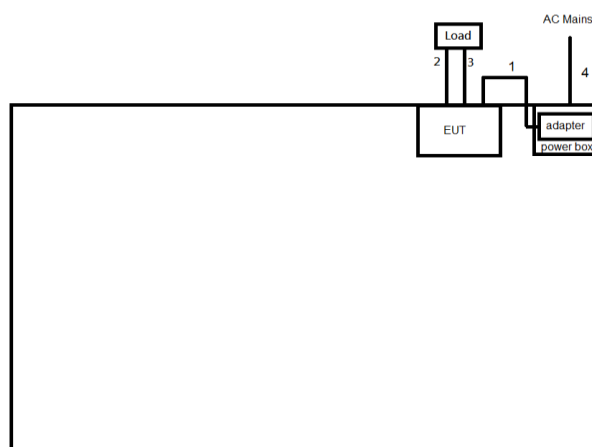

Item	Connection	Shielded	Length	Remark
1	DC Power cable	No	1.5m	-
2	RJ-45 cable	No	1.0m	-
3	RJ-45 cable	No	1.0m	-
4	Power cable	No	1.8m	-

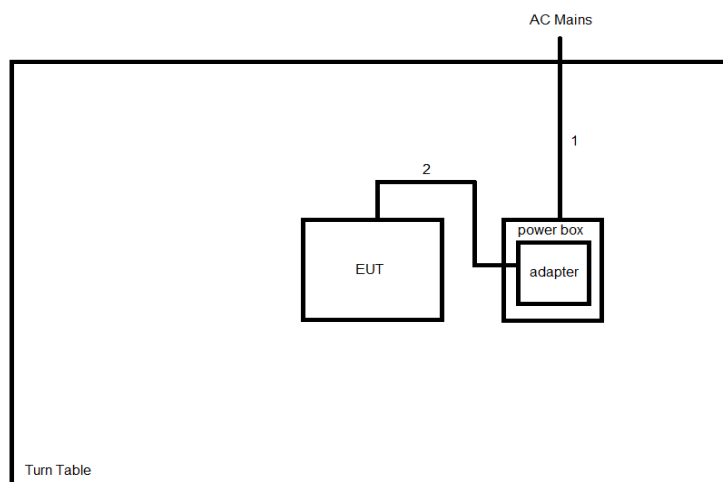Test Setup Diagram - Radiated Test (TX)


Item	Connection	Shielded	Length
1	AC power line	No	1.7m
2	DC power line	No	1.5m

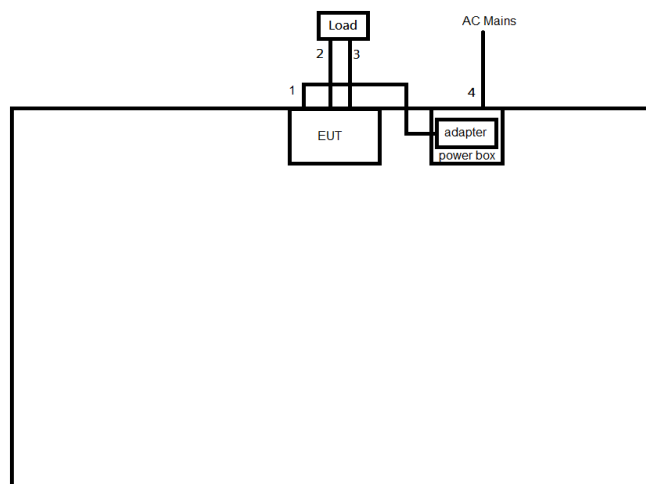Test Setup Diagram - Radiated Test (RX)


Item	Connection	Shielded	Length	Remark
1	DC Power cable	No	1.5m	-
2	RJ-45 cable	No	1.0m	-
3	RJ-45 cable	No	1.0m	-
4	Power cable	No	1.8m	-

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

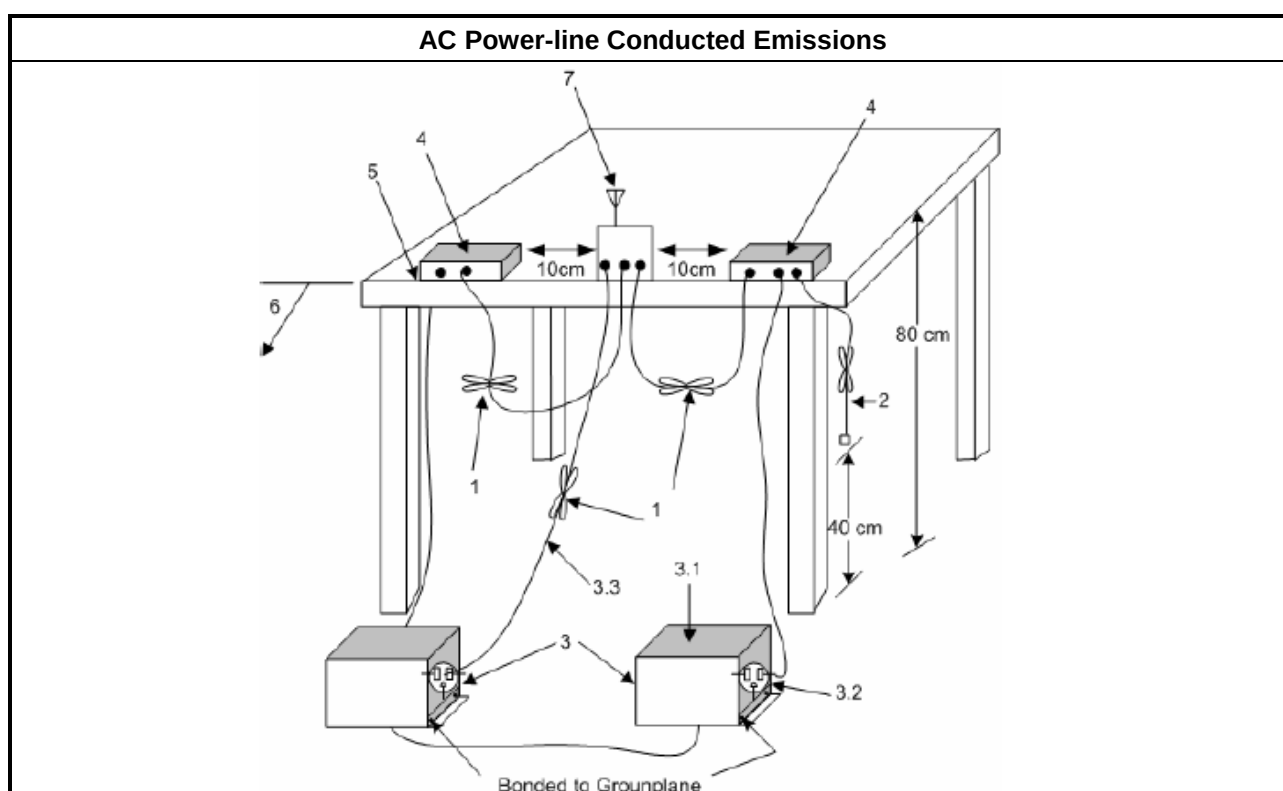

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as KDB 558074. clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
☐ Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
☐ Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

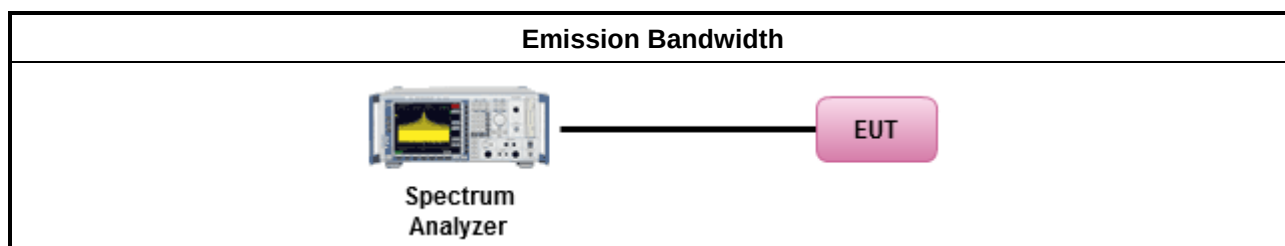

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit		
	▪	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪	Smart antenna system (SAS):
	-	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	-	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	-	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:		
	▪	2400-2483.5 MHz Band
	▪	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	▪	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	▪	Smart antenna system (SAS)
	-	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	-	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	-	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.		


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
☐	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
☐	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
Maximum Average Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
☒	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

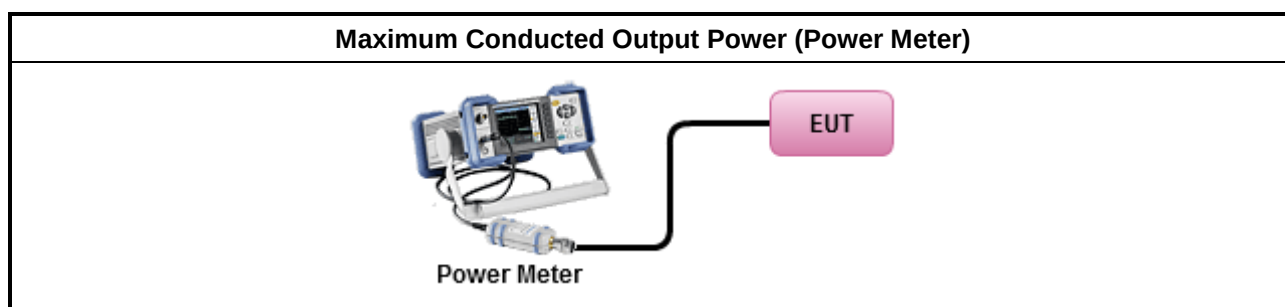

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) $\leq$ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Max. PSD.
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
▪	Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

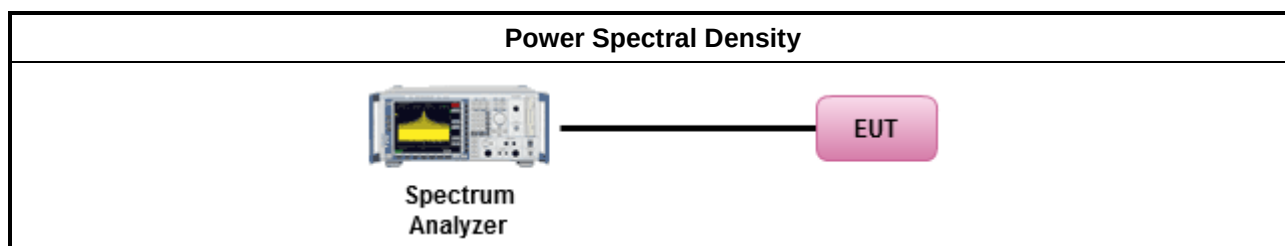

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

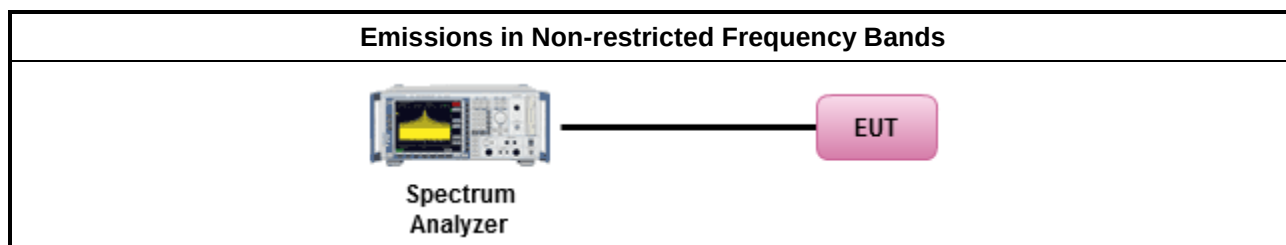

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.
	Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.
Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on LP0002 5.5.2: measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

3.6.4 Test Setup

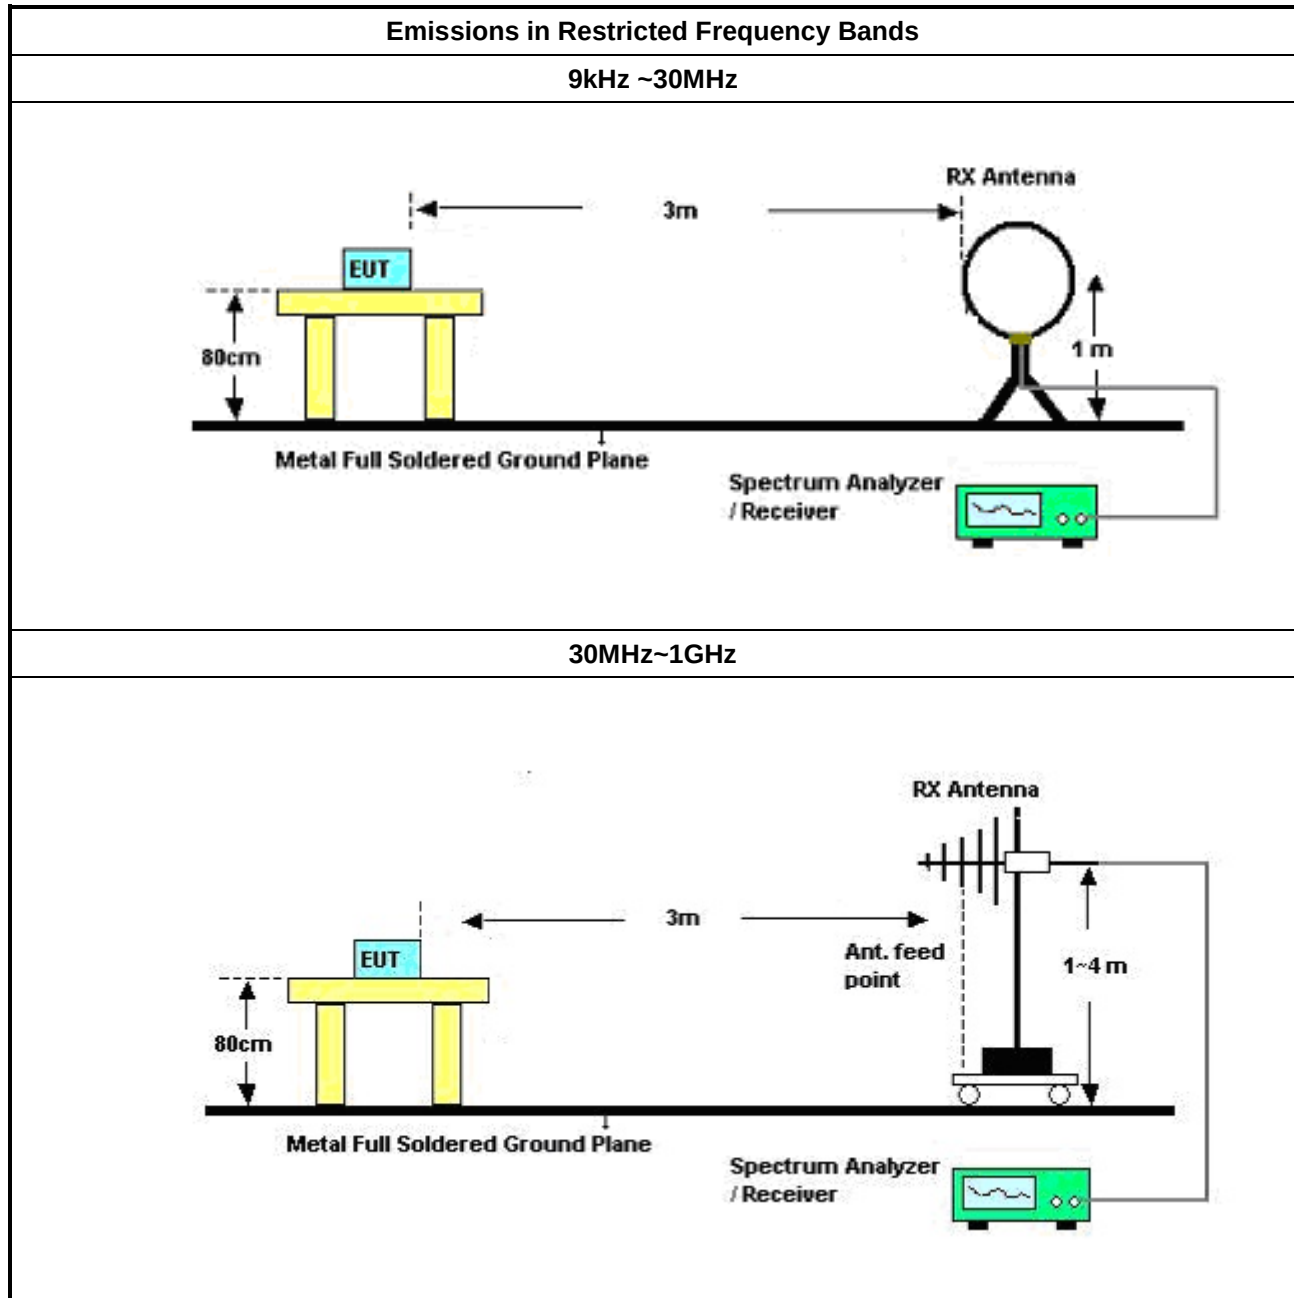

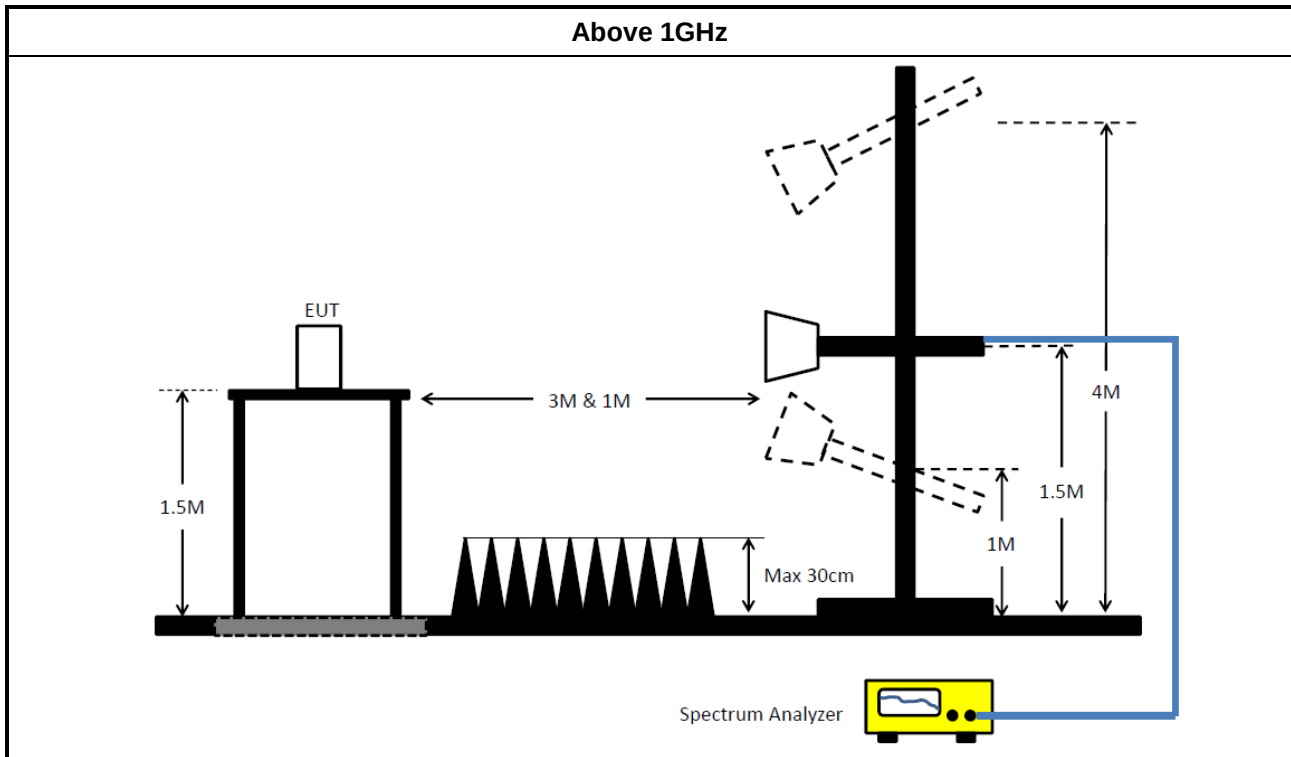

3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

3.7 Receiver Radiated Spurious Emissions

3.7.1 Receiver in Radiated Spurious Emissions Limit

Restricted Spurious Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.7.3 Test Procedures

Test Method	
☒	The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least 3 times the highest tuneable or local oscillator frequency, whichever is higher, without exceeding 40 GHz.
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	For radiated measurement, refer as KDB558074, clause 12.2.7.
☒	Refer as ANSI C63.4, clause 8.3.1.1 and 8.3.2.1 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.4, clause 8.3.1.1 and 8.3.2.1 for radiated emissions from 30 MHz-1 GHz. For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the QP-Limit so that the QP level does not need to be reported in addition.
☒	Refer as ANSI C63.4, clause 8.3.1.2 and 8.3.2.2 for radiated emissions from above 1 GHz. For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
☒	All amplitude of spurious emissions that are attenuated by more than 30 dB below the permissible value has no need to be reported.


3.7.4 Test Setup

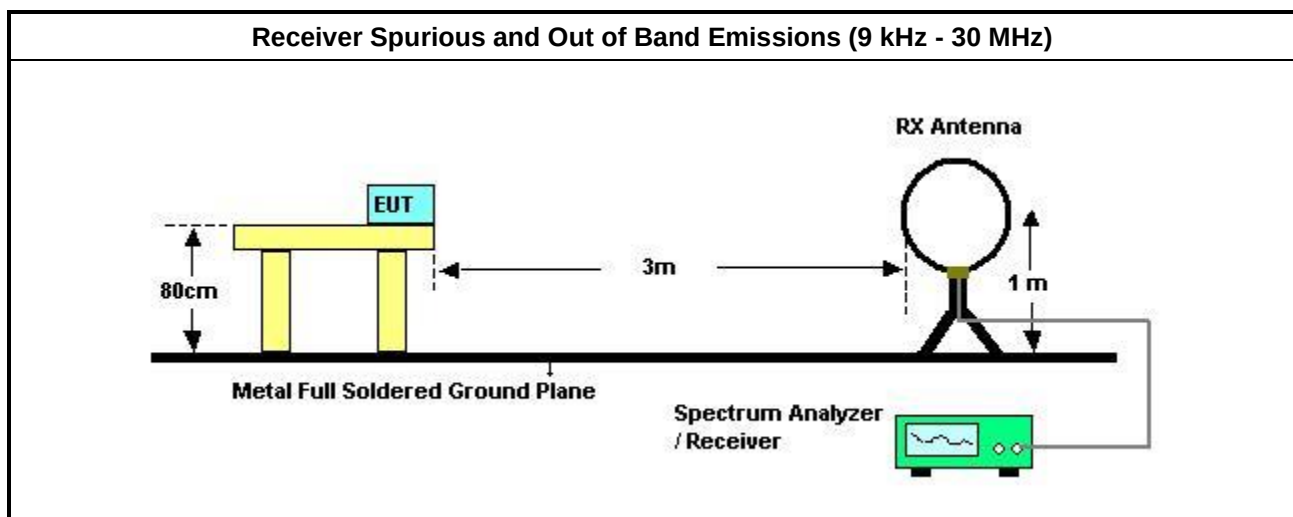

Receiver Radiated Unwanted Emissions (below 1GHz)

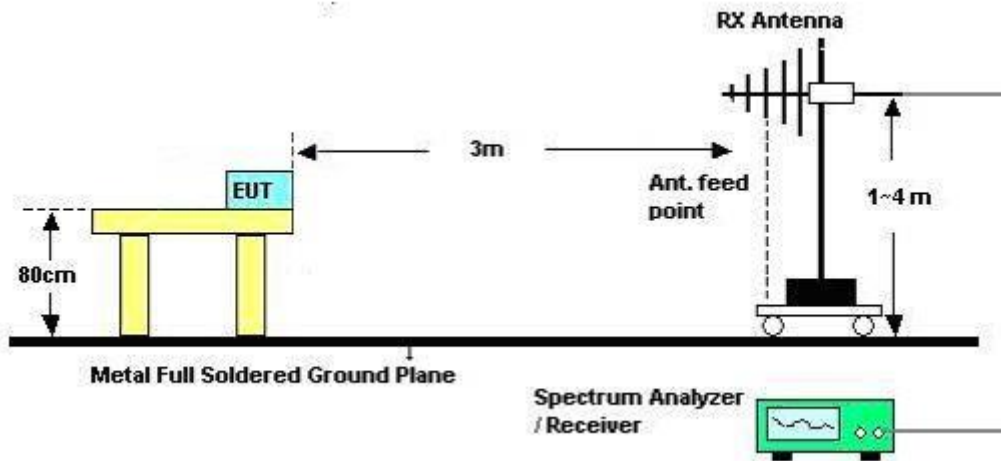

Receiver Radiated Unwanted Emissions (above 1GHz)

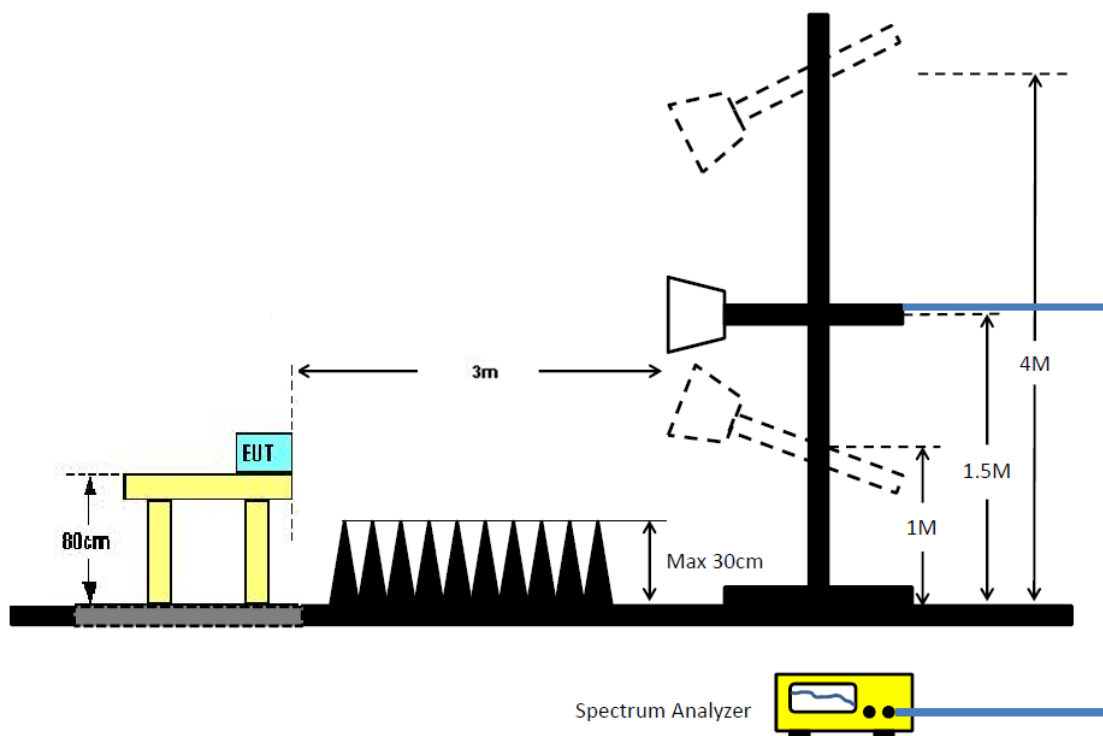

3.7.5 Receiver Radiated Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.7.6 Test Result of Receiver Radiated Unwanted Emissions

Refer as Appendix G

3.8 Maximum Permissible Exposure

3.8.1 Maximum Permissible Exposure Limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*100	6
3-30	1842 / f	4.89 / f	*900 / f ²	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	f/300	6
1500-100,000	-	-	5.0	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*100	30
3-30	1842/f	4.89/f	*180/f ²	30
30-300	27.5	0.073	1.0	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

3.8.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.8.3 MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

3.8.4 Test Result of Calculated Result and Limit

Refer as Appendix H

4 Test Equipment and Calibration Data

Instrument for AC Conduction(TX)

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	29/Apr/2017	28/Apr/2018
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	15/Nov/2016	14/Nov/2017
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	06/Oct/2017	05/Oct/2018
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	R&S	ESH3-Z2	100921	10 kHz ~ 30 MHz	12/Oct/2017	11/Oct/2018

NCR : Non-Calibration Require

Instrument for AC Conduction(RX)

EMC Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	04/Nov/2019	05/Nov/2020
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz ~ 200MHz	12/Sep/2019	11/Sep/2020
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	24/Sep/2019	23/Sep/2020

NCR : Non-Calibration Require

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	30/Dec/2016	29/Dec/2017
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	27/Jul/2017	26/Jul/2018
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	10/Feb/2017	09/Feb/2018
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	10/Feb/2017	09/Feb/2018
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY10709/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY10712/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_104	MY10713/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018

Instrument for Radiated Test(TX)


Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz	25/Apr/2017	24/Apr/2018
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz	21/Jun/2017	20/Jun/2018
Amplifier	Agilent	8449B	3008A02096	1GHz ~ 26.5GHz	25/Apr/2017	24/Apr/2018
Amplifier	EMC	EMC9135	980232	9KHz~1GHz	25/Apr/2017	24/Apr/2018
Spectrum Analyzer	KEYSIGHT	N9010A	MY54200885	10Hz ~ 44GHz	20/Jul/2017	19/Jul/2018
Bilog Antenna	TESEQ	CBL 6111D	35418	30MHz~1GHz	09/Sep/2017	08/Sep/2018
Horn Antenna	SCHWARZBECK	BBHA 9120D	BBHA9120D 1534	1GHz~18GHz	28/Apr/2017	27/Apr/2018
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170614	18GHz ~ 40GHz	06/Feb/2017	05/Feb/2018
Loop Antenna	TESTQ	HLA 6120	31244	9 kHz~30 MHz	02/Mar/2017	01/Mar/2018
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	02/Feb/2017	01/Feb/2018
RF Cable-high	Jye Bao	RG142	03CH09-HY	1GHz ~ 40GHz	02/Feb/2017	01/Feb/2018
Receiver	R&S	ESR3	102052	9KHz ~ 3.6GHz	29/Apr/2017	28/Apr/2018

Instrument for Radiated Test(RX)

3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz	22/Apr/2019	21/Apr/2020
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz	13/Jun/2019	12/Jun/2020
Microwave System Prempplier	Agilent	8449B	3008A02326	1GHz ~ 26.5GHz	15/Jul/2019	14/Jul/2020
Amplifier	EMC	EMC9135	980232	9kHz~1GHz	22/Apr/2019	21/Apr/2020
EMI Test Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200885	10Hz~44GHz	07/Aug/2019	06/Aug/2020
Bilog Antenna & 5dB Attenuator	TESEQ & MTJ	CBL6111D & MTJ6102-05	35418 / 3	30MHz~1GHz	11/Oct/2019	10/Oct/2020
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120 D 1534	1GHz~18GHz	22/May/2019	21/May/2020
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170614	18GHz~40GHz	22/May/2019	21/May/2020
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz ~ 40GHz	05/Aug/2019	04/Aug/2020
Loop Antenna	TESEQ	HLA 6120	24155	9k-30MHz	29/Mar/2019	28/Mar/2020
LF-CABLE-2019 0218	Jye Bao	RG142	CB028	9kHz ~ 1GHz	17/Feb/2020	16/Feb/2021
RF Cable-high	HUBER+SUHNER	SUCOFLEX104	SN 556626/4 + 556627	1GHz ~ 40GHz	13/Mar/2020	11/Mar/2021

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Adapter Mode - TX		

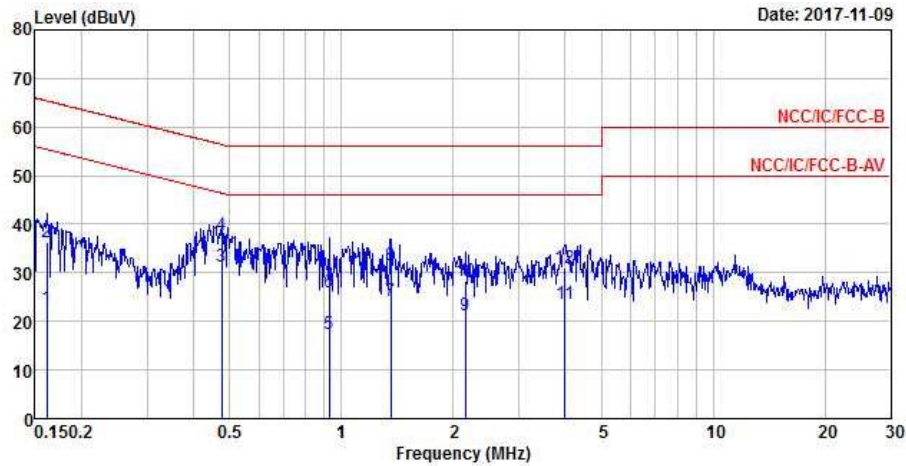


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16155	22.86	-32.52	55.38	13.21	9.62	0.03	Average
2	0.16155	36.20	-29.18	65.38	26.55	9.62	0.03	QP
3 MAX	0.47612	31.20	-15.21	46.41	21.50	9.62	0.08	Average
4	0.47612	37.65	-18.76	56.41	27.95	9.62	0.08	QP
5	0.92821	17.45	-28.55	46.00	7.85	9.59	0.01	Average
6	0.92821	26.04	-29.96	56.00	16.44	9.59	0.01	QP
7	1.35931	24.34	-21.66	46.00	14.72	9.62	0.00	Average
8	1.35931	31.72	-24.28	56.00	22.10	9.62	0.00	QP
9	2.15531	21.16	-24.84	46.00	11.49	9.66	0.01	Average
10	2.15531	28.37	-27.63	56.00	18.70	9.66	0.01	QP
11	3.98501	23.52	-22.48	46.00	13.72	9.71	0.09	Average
12	3.98501	30.88	-25.12	56.00	21.08	9.71	0.09	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter Mode - TX		

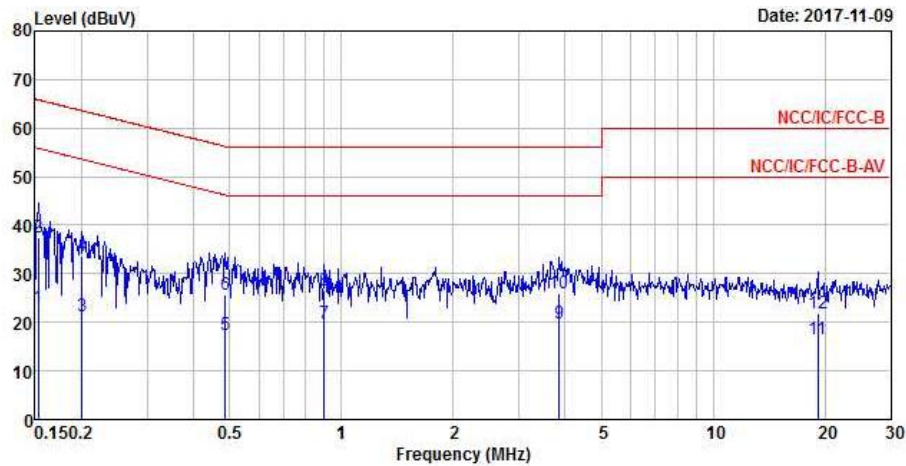


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15321	23.03	-32.79	55.82	13.33	9.66	0.04	Average
2	0.15321	37.44	-28.38	65.82	27.74	9.66	0.04	QP
3	0.20075	21.35	-32.23	53.58	11.70	9.65	0.00	Average
4	0.20075	33.74	-29.84	63.58	24.09	9.65	0.00	QP
5	0.48632	17.42	-28.81	46.23	7.67	9.67	0.08	Average
6	0.48632	25.64	-30.59	56.23	15.89	9.67	0.08	QP
7	0.89917	19.83	-26.17	46.00	10.18	9.64	0.01	Average
8	0.89917	26.64	-29.36	56.00	16.99	9.64	0.01	QP
9 MAX	3.86031	19.83	-26.17	46.00	9.98	9.77	0.08	Average
10	3.86031	25.96	-30.04	56.00	16.11	9.77	0.08	QP
11	19.12202	16.67	-33.33	50.00	6.61	9.89	0.17	Average
12	19.12202	21.74	-38.26	60.00	11.68	9.89	0.17	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Adapter Mode - RX		

17/03/2020

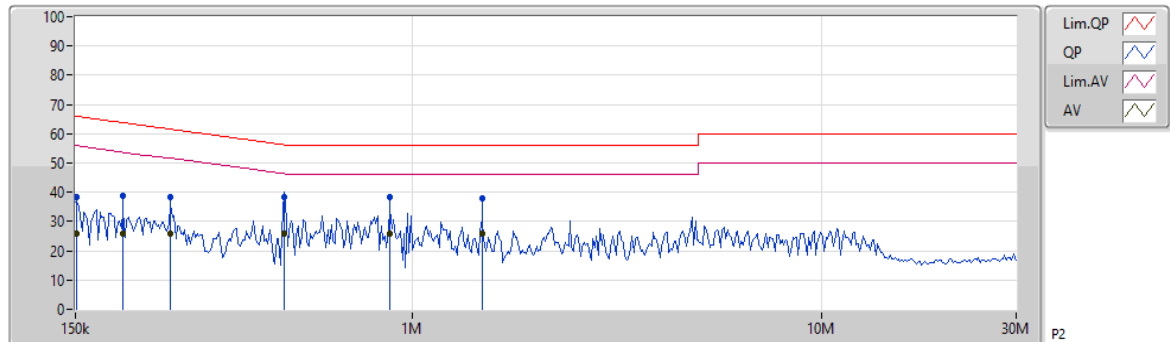

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Raw (dBuV)	Condition	Comment	LISN (dB)	CL (dB)	AT (dB)				
QP	151.5k	38.44	65.92	-27.48	18.81	Neutral	-	9.65	0.11	9.87				
AV	151.5k	26.02	55.92	-29.90	6.39	Neutral	-	9.65	0.11	9.87				
QP	196.231k	38.86	63.76	-24.90	19.24	Neutral	-	9.64	0.11	9.87				
AV	196.231k	26.02	53.76	-27.74	6.40	Neutral	-	9.64	0.11	9.87				
QP	256.712k	38.34	61.54	-23.20	18.71	Neutral	-	9.64	0.12	9.87				
AV	256.712k	26.03	51.54	-25.51	6.40	Neutral	-	9.64	0.12	9.87				
QP	485.303k	38.47	56.25	-17.78	18.84	Neutral	-	9.63	0.13	9.87				
AV	485.303k	26.04	46.25	-20.21	6.41	Neutral	-	9.63	0.13	9.87				
QP	881.649k	38.32	56.00	-17.68	18.71	Neutral	"Worst"	9.63	0.11	9.87				
AV	881.649k	26.02	46.00	-19.98	6.41	Neutral	-	9.63	0.11	9.87				
QP	1.479M	38.02	56.00	-17.98	18.38	Neutral	-	9.64	0.13	9.87				
AV	1.479M	26.04	46.00	-19.96	6.40	Neutral	-	9.64	0.13	9.87				


Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter Mode - RX		

17/03/2020

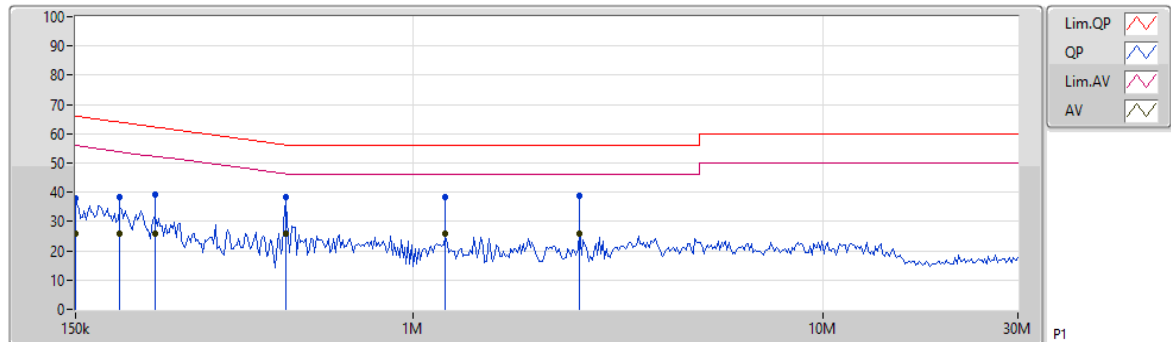

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Raw (dBuV)	Condition	Comment	LISN (dB)	CL (dB)	AT (dB)				
QP	150k	37.98	66.00	-28.02	18.34	Line	-	9.66	0.11	9.87				
AV	150k	26.01	56.00	-29.99	6.37	Line	-	9.66	0.11	9.87				
QP	192.365k	38.38	63.93	-25.55	18.75	Line	-	9.65	0.11	9.87				
AV	192.365k	26.05	53.93	-27.88	6.42	Line	-	9.65	0.11	9.87				
QP	234.722k	39.43	62.27	-22.84	19.79	Line	-	9.65	0.12	9.87				
AV	234.722k	26.05	52.27	-26.22	6.41	Line	-	9.65	0.12	9.87				
QP	490.156k	38.30	56.17	-17.87	18.66	Line	-	9.64	0.13	9.87				
AV	490.156k	26.04	46.17	-20.13	6.40	Line	-	9.64	0.13	9.87				
QP	1.2M	38.57	56.00	-17.43	18.93	Line	-	9.64	0.12	9.88				
AV	1.2M	26.03	46.00	-19.97	6.39	Line	-	9.64	0.12	9.88				
QP	2.557M	38.66	56.00	-17.34	18.98	Line	"Worst"	9.65	0.16	9.87				
AV	2.557M	26.07	46.00	-19.93	6.39	Line	-	9.65	0.16	9.87				

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	10.025M	13.993M	14M0G1D	9.075M	13.768M
802.11g_Nss1,(6Mbps)_1TX	15.075M	18.666M	18M7D1D	13.75M	16.317M
802.11n HT20_Nss1,(MCS0)_1TX	15.05M	18.891M	18M9D1D	14.275M	17.366M
802.11n HT40_Nss1,(MCS0)_1TX	31.3M	36.032M	36M0D1D	29.8M	35.732M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2412MHz_TnomVnom	Pass	500k	9.075M	13.768M
2437MHz_TnomVnom	Pass	500k	9.55M	13.968M
2462MHz_TnomVnom	Pass	500k	10.025M	13.993M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2412MHz_TnomVnom	Pass	500k	14.975M	16.317M
2437MHz_TnomVnom	Pass	500k	13.75M	18.666M
2462MHz_TnomVnom	Pass	500k	15.075M	16.417M
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-
2412MHz_TnomVnom	Pass	500k	15.05M	17.366M
2437MHz_TnomVnom	Pass	500k	14.275M	18.891M
2462MHz_TnomVnom	Pass	500k	14.925M	17.491M
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-
2422MHz_TnomVnom	Pass	500k	29.8M	35.732M
2437MHz_TnomVnom	Pass	500k	31.3M	36.032M
2452MHz_TnomVnom	Pass	500k	31.25M	35.782M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_1TX
EBW
2412MHz


09/11/2017

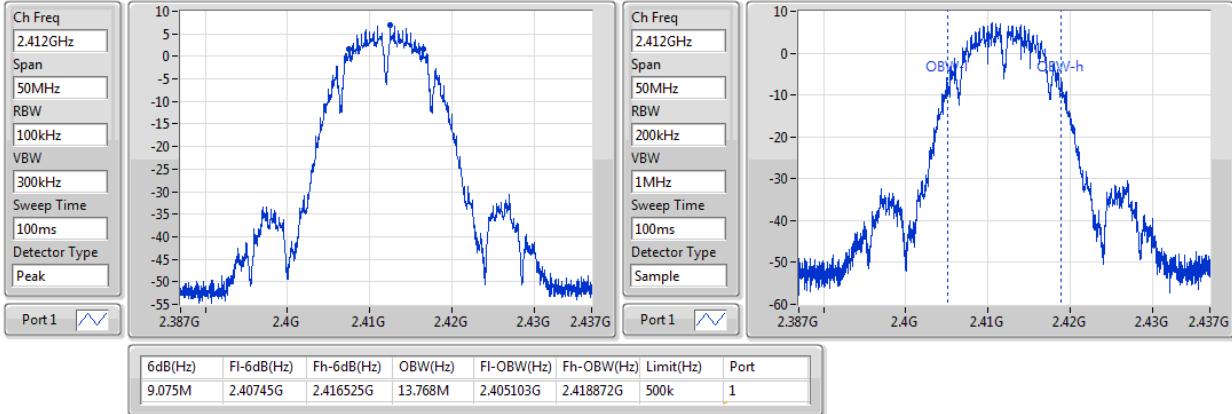
802.11b_Nss1,(1Mbps)_1TX
EBW
2437MHz

09/11/2017

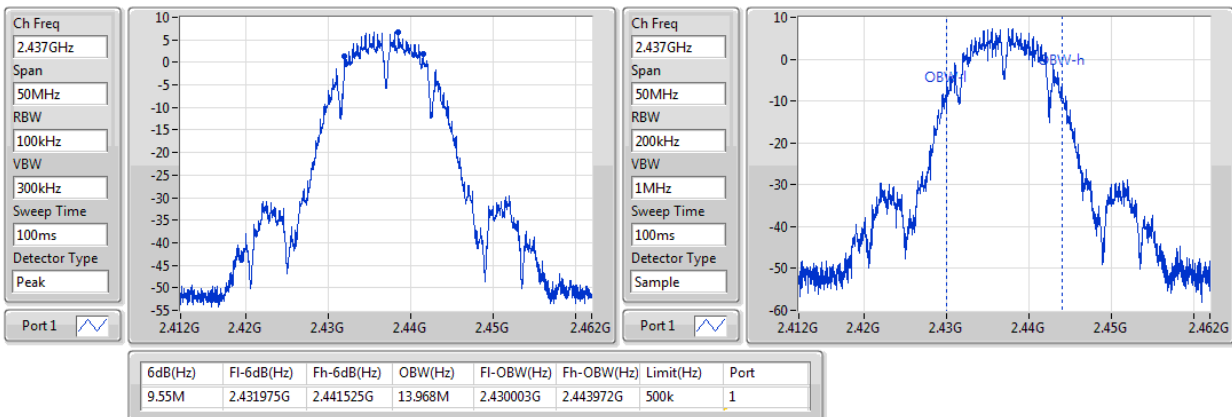

802.11b_Nss1,(1Mbps)_1TX
EBW
2462MHz

09/11/2017

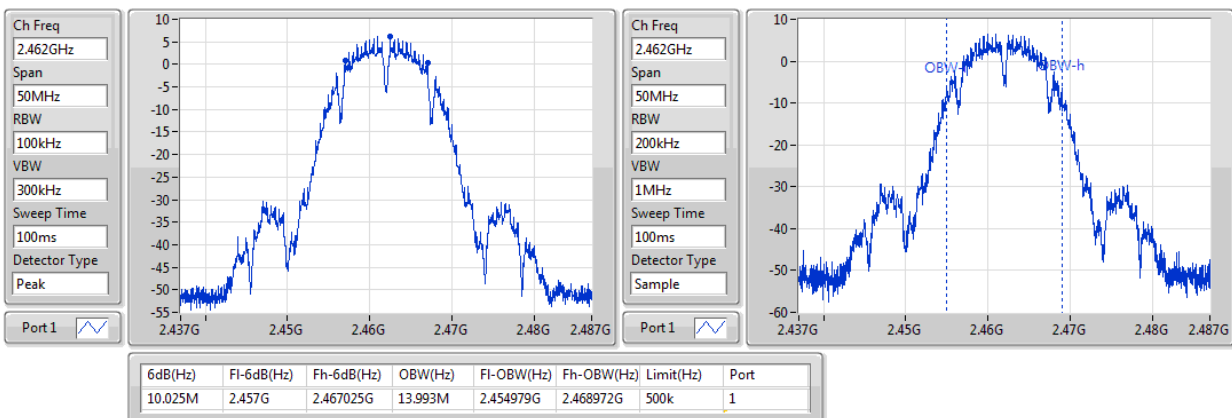


802.11g_Nss1,(6Mbps)_1TX
EBW
2412MHz


09/11/2017

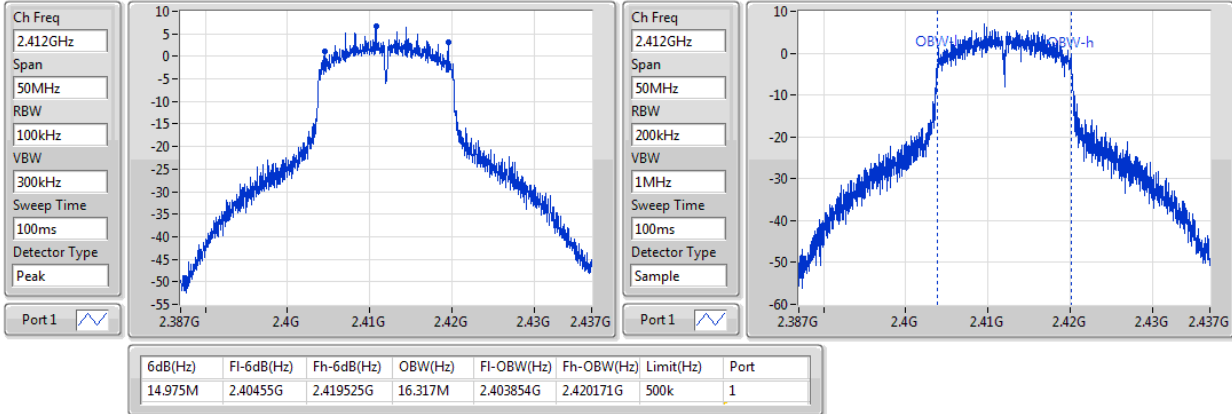
802.11g_Nss1,(6Mbps)_1TX
EBW
2437MHz

09/11/2017

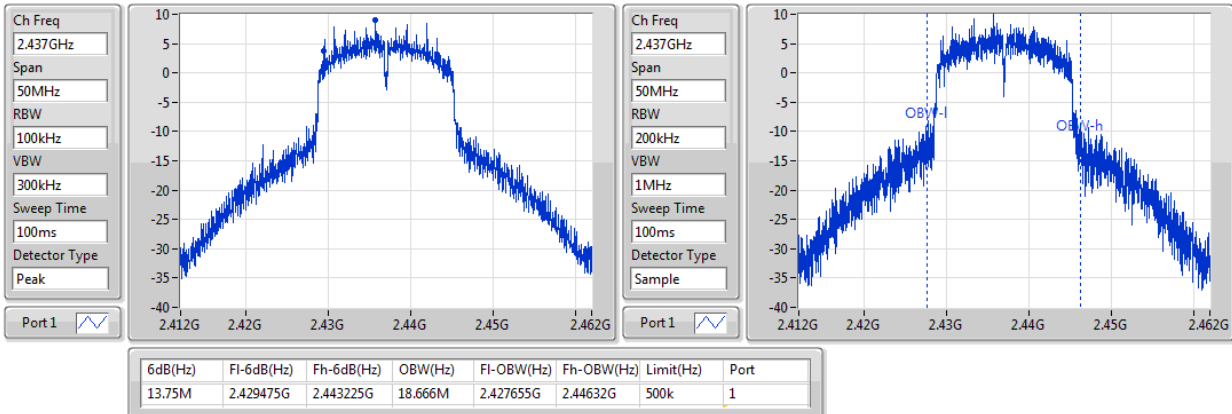

802.11g_Nss1,(6Mbps)_1TX
EBW
2462MHz

09/11/2017

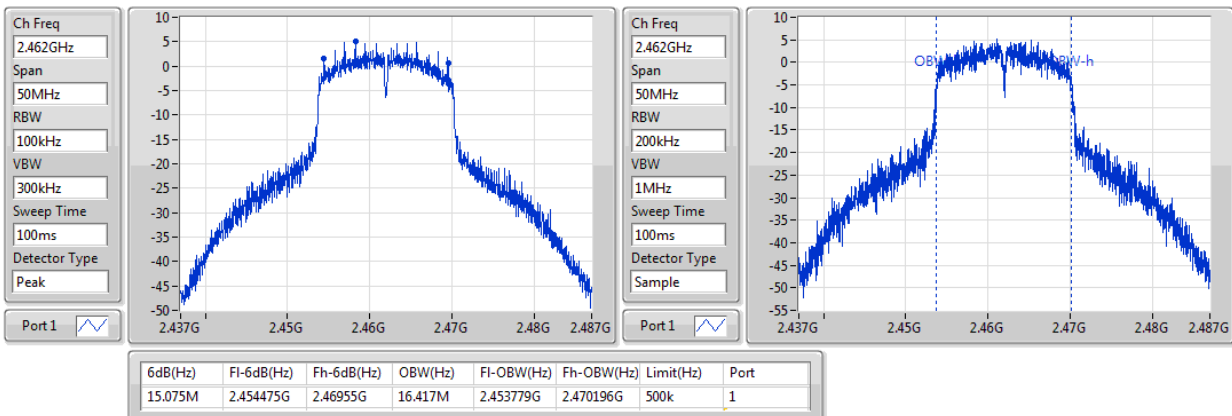


802.11n HT20_Nss1,(MCS0)_1TX
EBW
2412MHz


09/11/2017

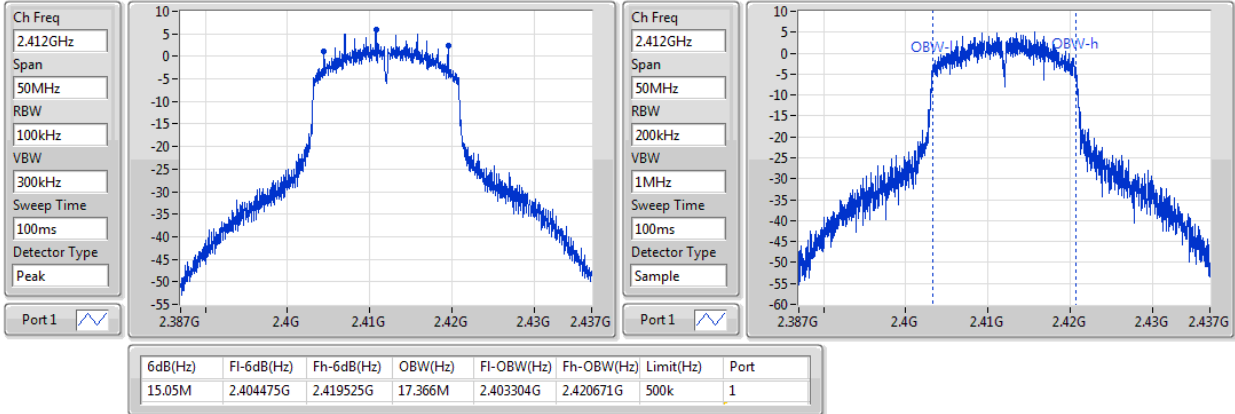
802.11n HT20_Nss1,(MCS0)_1TX
EBW
2437MHz

09/11/2017

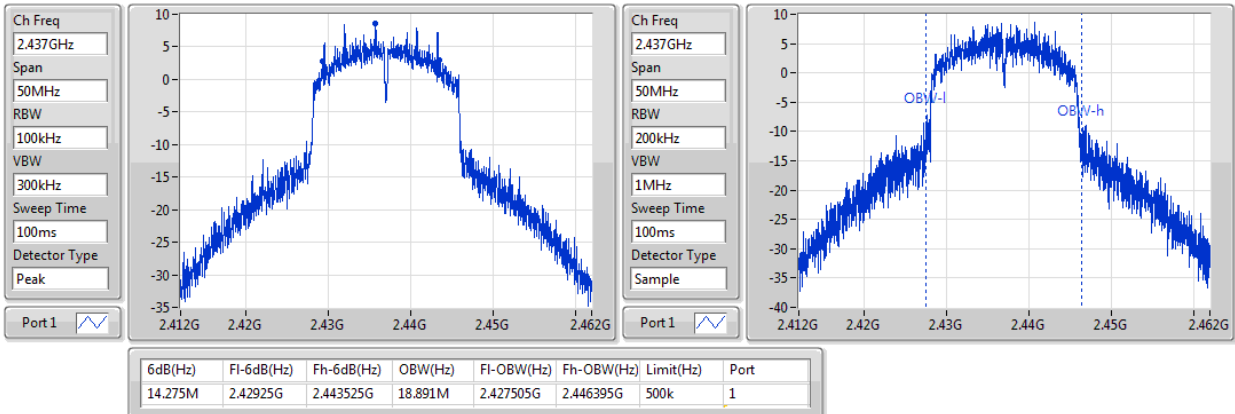

802.11n HT20_Nss1,(MCS0)_1TX
EBW
2462MHz

09/11/2017

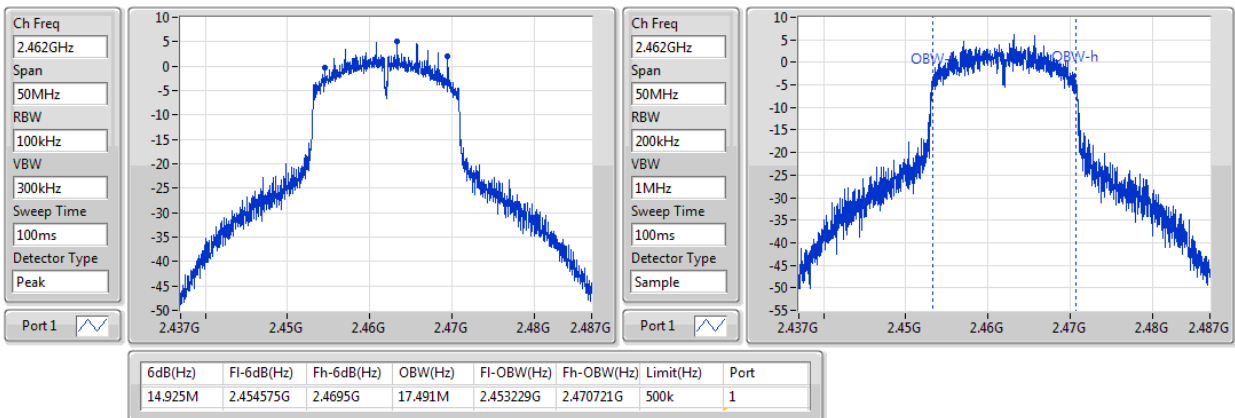


802.11n HT40_Nss1,(MCS0)_1TX
EBW
2422MHz


09/11/2017

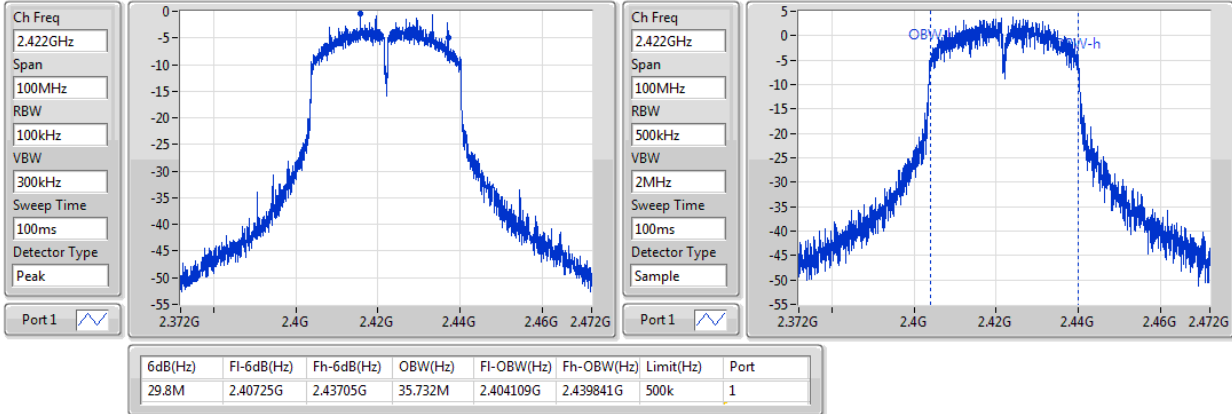
802.11n HT40_Nss1,(MCS0)_1TX
EBW
2437MHz

09/11/2017

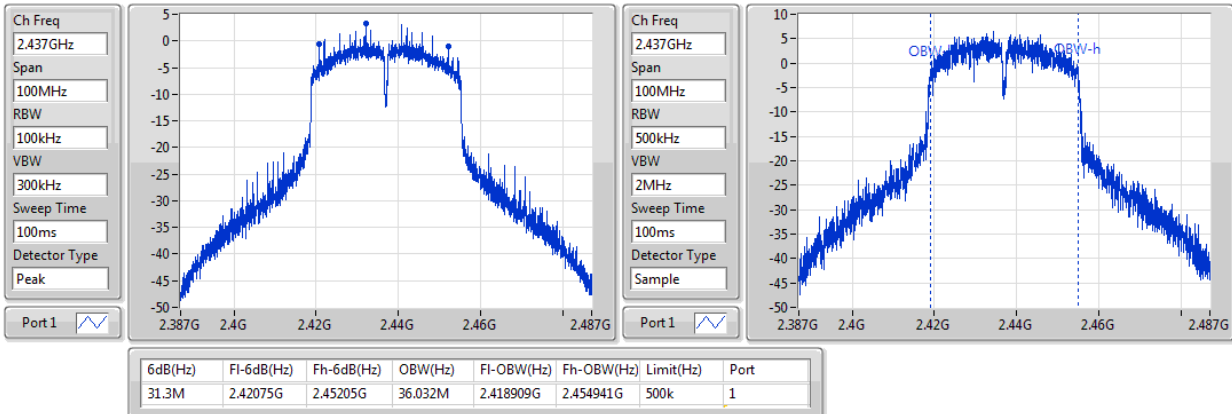
802.11n HT40_Nss1,(MCS0)_1TX
EBW
2452MHz

09/11/2017

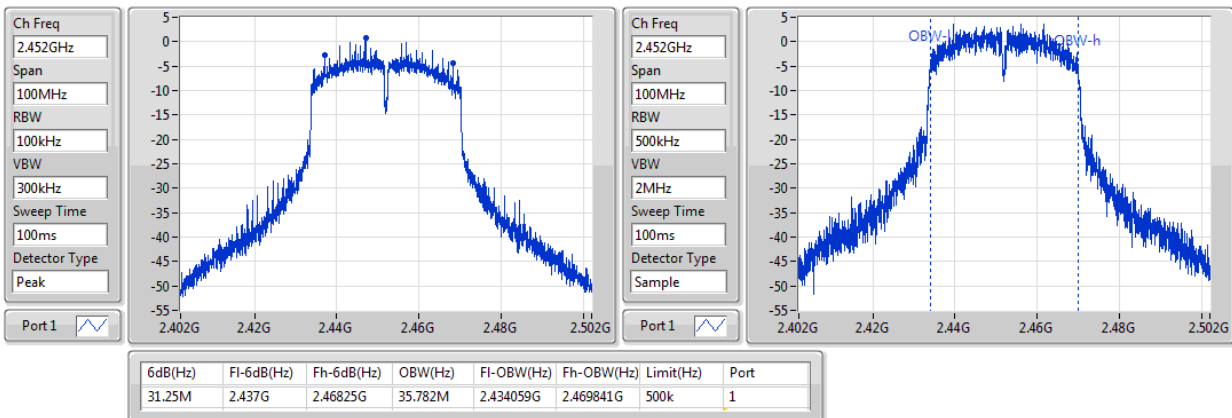

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	16.29	0.04256
802.11g_Nss1,(6Mbps)_1TX	19.10	0.08128
802.11n HT20_Nss1,(MCS0)_1TX	18.91	0.07780
802.11n HT40_Nss1,(MCS0)_1TX	16.13	0.04102

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.40	16.24	16.24	30.00
2437MHz_TnomVnom	Pass	2.40	16.29	16.29	30.00
2462MHz_TnomVnom	Pass	2.40	15.54	15.54	30.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.40	16.92	16.92	30.00
2437MHz_TnomVnom	Pass	2.40	19.10	19.10	30.00
2462MHz_TnomVnom	Pass	2.40	16.30	16.30	30.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.40	15.75	15.75	30.00
2437MHz_TnomVnom	Pass	2.40	18.91	18.91	30.00
2462MHz_TnomVnom	Pass	2.40	15.62	15.62	30.00
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz_TnomVnom	Pass	2.40	13.78	13.78	30.00
2437MHz_TnomVnom	Pass	2.40	16.13	16.13	30.00
2452MHz_TnomVnom	Pass	2.40	13.62	13.62	30.00

DG = Directional Gain; **Port X** = Port X output power

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-6.02
802.11g_Nss1,(6Mbps)_1TX	-5.70
802.11n HT20_Nss1,(MCS0)_1TX	-6.77
802.11n HT40_Nss1,(MCS0)_1TX	-11.31

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.40	-6.02	-6.02	8.00
2437MHz_TnomVnom	Pass	2.40	-8.09	-8.09	8.00
2462MHz_TnomVnom	Pass	2.40	-8.76	-8.76	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.40	-7.93	-7.93	8.00
2437MHz_TnomVnom	Pass	2.40	-5.70	-5.70	8.00
2462MHz_TnomVnom	Pass	2.40	-9.96	-9.96	8.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.40	-8.21	-8.21	8.00
2437MHz_TnomVnom	Pass	2.40	-6.77	-6.77	8.00
2462MHz_TnomVnom	Pass	2.40	-9.65	-9.65	8.00
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz_TnomVnom	Pass	2.40	-13.19	-13.19	8.00
2437MHz_TnomVnom	Pass	2.40	-11.31	-11.31	8.00
2452MHz_TnomVnom	Pass	2.40	-14.42	-14.42	8.00

DG = Directional Gain; RBW=3kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11b_Nss1,(1Mbps)_1TX

PSD

2412MHz

09/11/2017

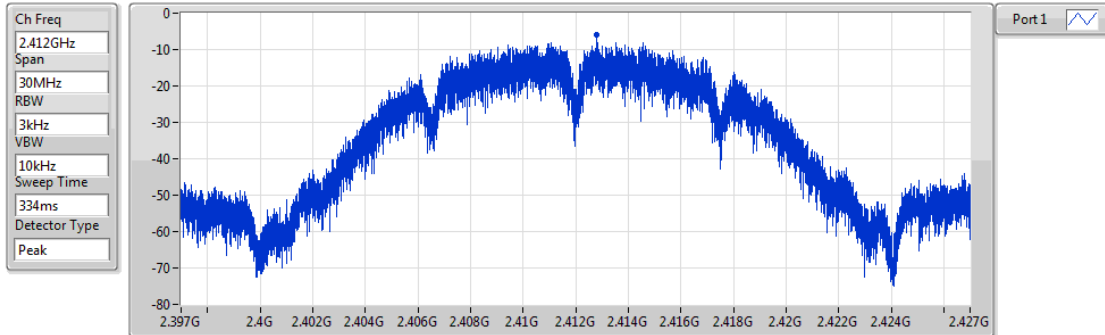


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.02	-6.02	-6.02

802.11b_Nss1,(1Mbps)_1TX

PSD

2437MHz

09/11/2017

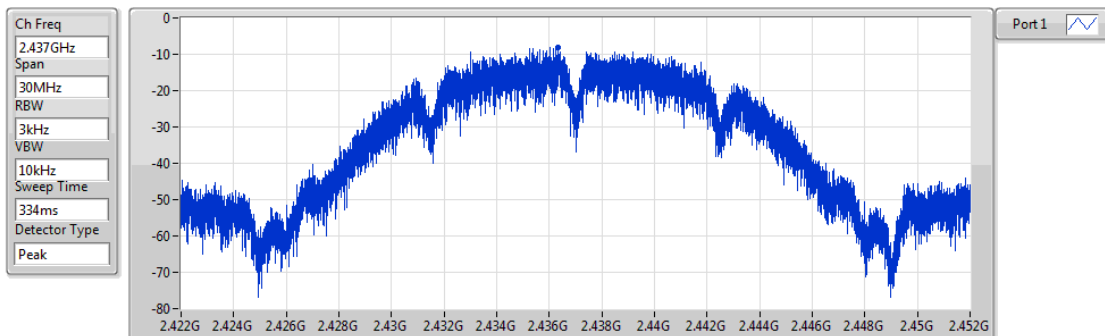


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.09	-8.09	-8.09

802.11b_Nss1,(1Mbps)_1TX

PSD

2462MHz

09/11/2017

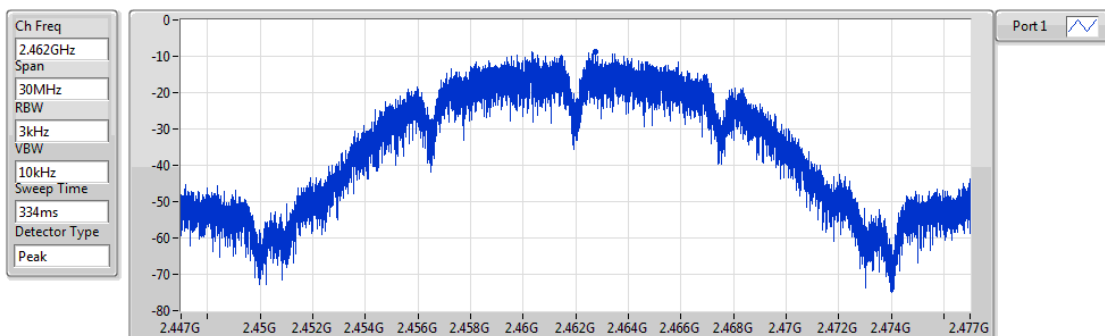


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.76	-8.76	-8.76

802.11g_Nss1,(6Mbps)_1TX

PSD

2412MHz

09/11/2017

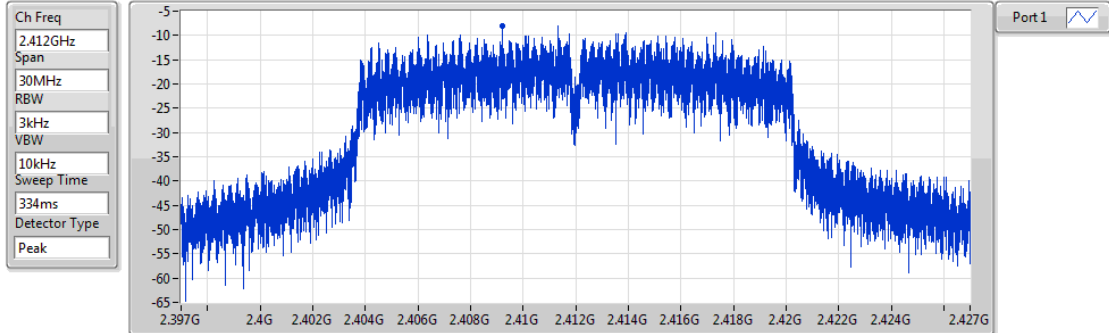


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.93	-7.93	-7.93

802.11g_Nss1,(6Mbps)_1TX

PSD

2437MHz

09/11/2017

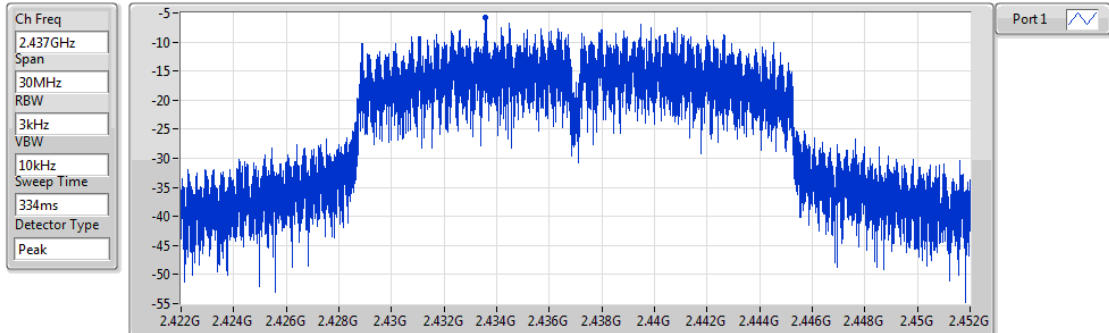


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.70	-5.70	-5.70

802.11g_Nss1,(6Mbps)_1TX

PSD

2462MHz

09/11/2017

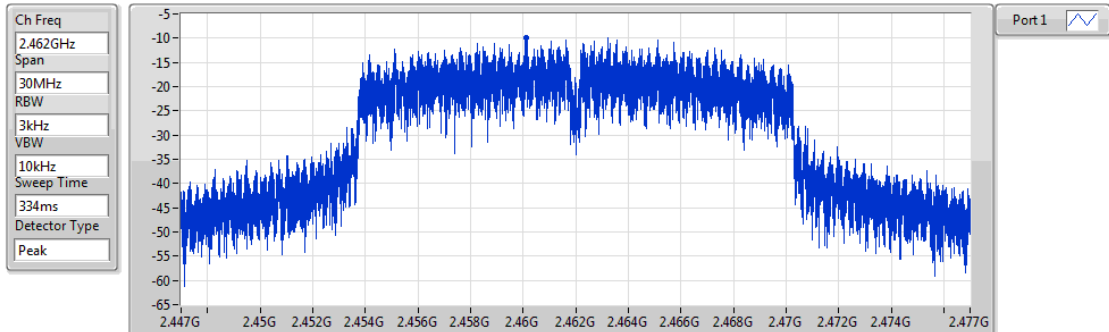


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.96	-9.96	-9.96

802.11n HT20_Nss1,(MCS0)_1TX

PSD

2412MHz

09/11/2017

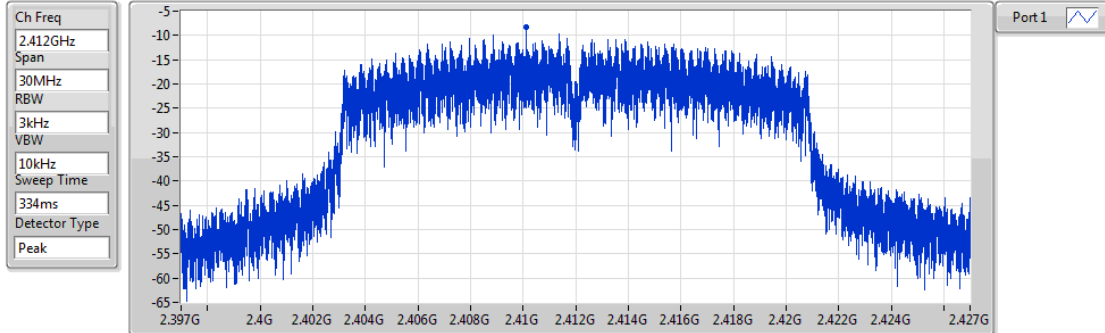


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.21	-8.21	-8.21

802.11n HT20_Nss1,(MCS0)_1TX

PSD

2437MHz

09/11/2017

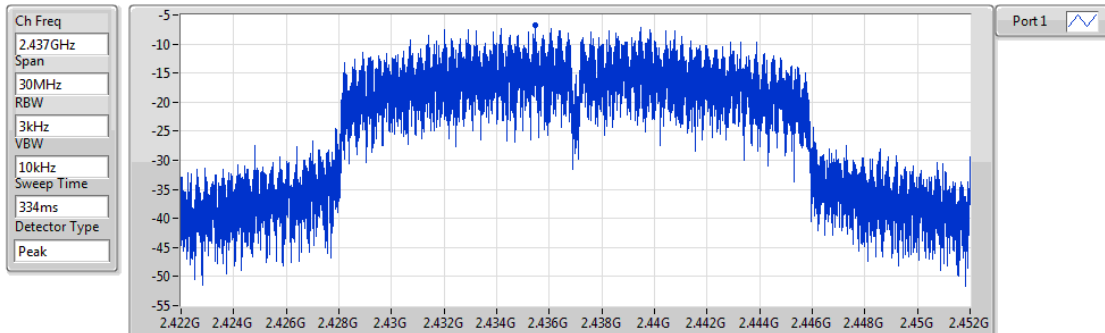


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.77	-6.77	-6.77

802.11n HT20_Nss1,(MCS0)_1TX

PSD

2462MHz

09/11/2017

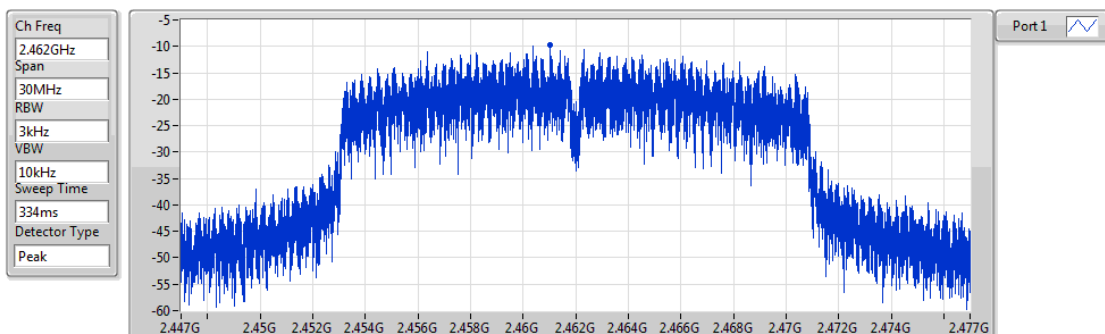


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.65	-9.65	-9.65

802.11n HT40_Nss1,(MCS0)_1TX

PSD

2422MHz

09/11/2017

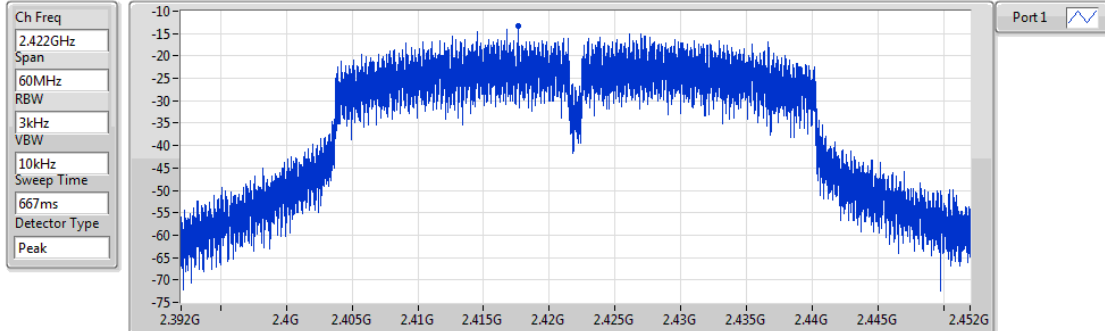


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-13.19	-13.19	-13.19

802.11n HT40_Nss1,(MCS0)_1TX

PSD

2437MHz

09/11/2017

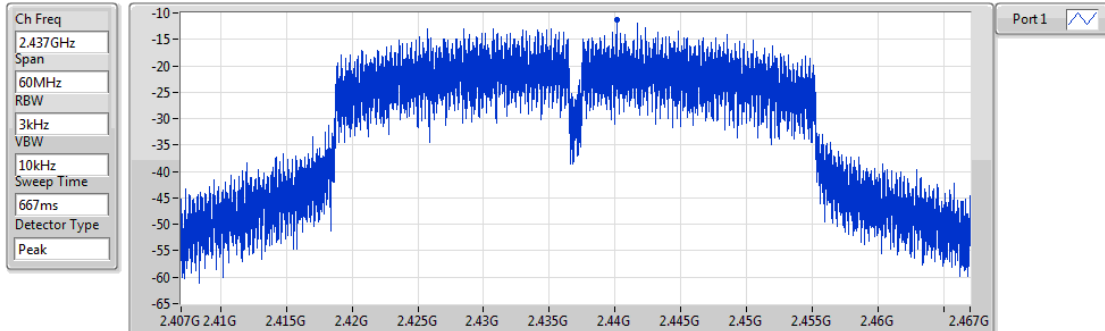


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.31	-11.31	-11.31

802.11n HT40_Nss1,(MCS0)_1TX

PSD

2452MHz

09/11/2017

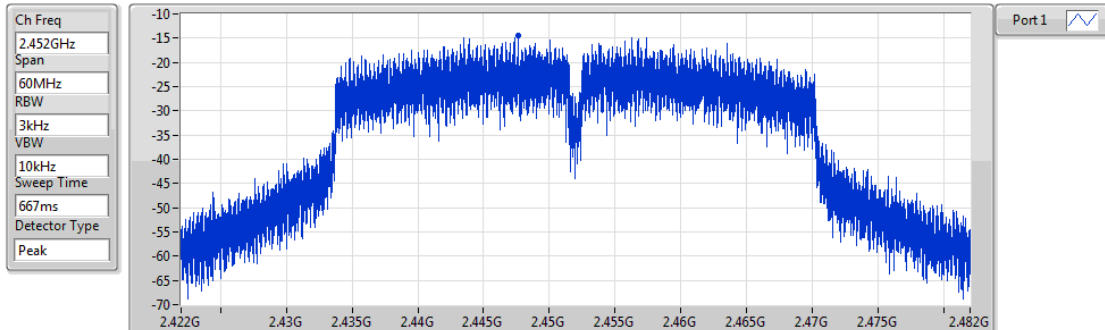

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-14.42	-14.42	-14.42

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	2.436072G	6.59	-23.41	2.11069G	-59.73	2.39704G	-33.78	2.51102G	-57.24	16.366214G	-53.98	1
802.11g_Nss1,(6Mbps)_1TX	Pass	2.438243G	8.65	-21.35	2.17593G	-58.15	2.39984G	-22.41	2.48934G	-57.93	6.973847G	-53.22	1
802.11n HT20_Nss1,(MCS0)_1TX	Pass	2.441917G	8.48	-21.52	2.12001G	-58.96	2.39952G	-25.92	2.48758G	-57.92	6.95418G	-53.51	1
802.11n HT40_Nss1,(MCS0)_1TX	Pass	2.440748G	2.61	-27.39	2.02001G	-58.38	2.39984G	-29.42	2.4891G	-57.93	6.975077G	-53.50	1

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.436072G	6.59	-23.41	2.11069G	-59.73	2.39704G	-33.78	2.51102G	-57.24	16.366214G	-53.98	1
2437MHz_TnomVnom	Pass	2.436072G	6.59	-23.41	2.300585G	-58.69	2.39208G	-55.03	2.50486G	-57.55	24.969095G	-52.51	1
2462MHz_TnomVnom	Pass	2.436072G	6.59	-23.41	2.08506G	-59.20	2.39544G	-58.07	2.48646G	-54.55	6.982276G	-53.73	1
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.438243G	8.65	-21.35	2.17593G	-58.15	2.39984G	-22.41	2.48934G	-57.93	6.973847G	-53.22	1
2437MHz_TnomVnom	Pass	2.438243G	8.65	-21.35	2.10137G	-58.76	2.39984G	-45.25	2.48454G	-50.39	17.439467G	-53.69	1
2462MHz_TnomVnom	Pass	2.438243G	8.65	-21.35	1.780995G	-59.09	2.39176G	-58.74	2.48366G	-36.60	15.04853G	-53.46	1
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.441917G	8.48	-21.52	2.12001G	-58.96	2.39952G	-25.92	2.48758G	-57.92	6.95418G	-53.51	1
2437MHz_TnomVnom	Pass	2.441917G	8.48	-21.52	2.309905G	-58.80	2.39984G	-46.88	2.48414G	-51.25	6.962609G	-53.00	1
2462MHz_TnomVnom	Pass	2.441917G	8.48	-21.52	2.013995G	-59.32	2.39168G	-57.85	2.48382G	-37.30	15.099102G	-53.95	1
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz_TnomVnom	Pass	2.440748G	2.61	-27.39	2.02001G	-58.38	2.39984G	-29.42	2.4891G	-57.93	6.975077G	-53.50	1
2437MHz_TnomVnom	Pass	2.440748G	2.61	-27.39	1.96734G	-59.16	2.39968G	-31.10	2.48414G	-40.71	6.986295G	-53.14	1
2452MHz_TnomVnom	Pass	2.440748G	2.61	-27.39	1.959325G	-57.61	2.39936G	-54.42	2.48446G	-32.61	6.980686G	-52.70	1

802.11b_Nss1,(1Mbps)_1TX

CSE NdB

2412MHz

09/11/2017

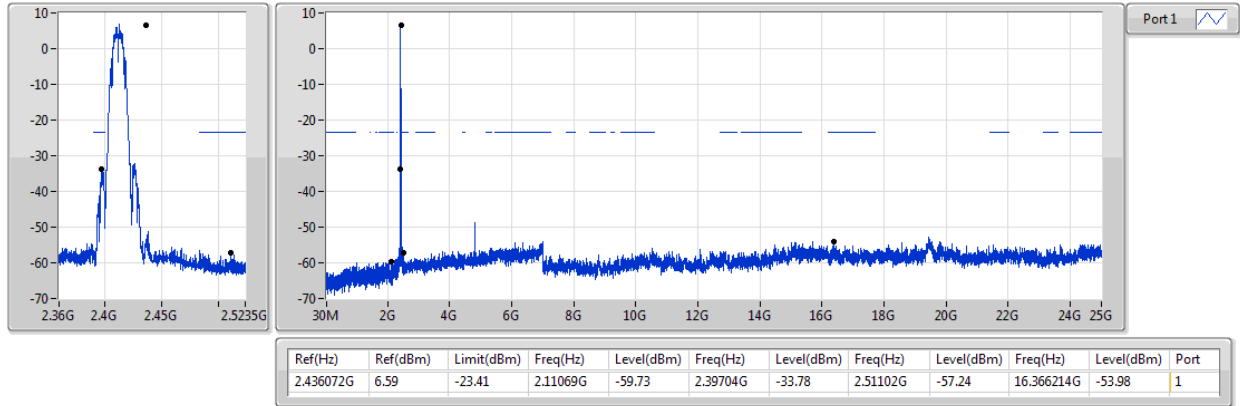


802.11b_Nss1,(1Mbps)_1TX

CSE NdB

2437MHz

09/11/2017

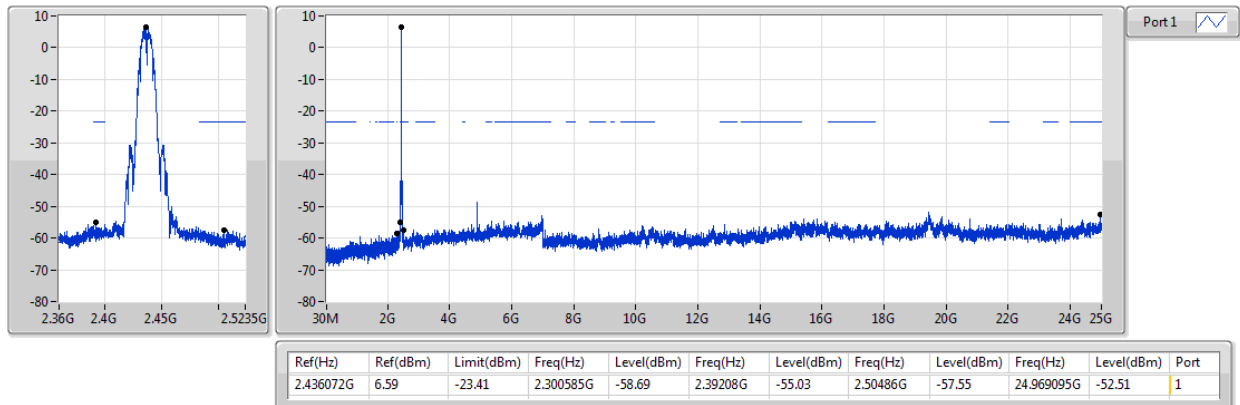


802.11b_Nss1,(1Mbps)_1TX

CSE NdB

2462MHz

09/11/2017


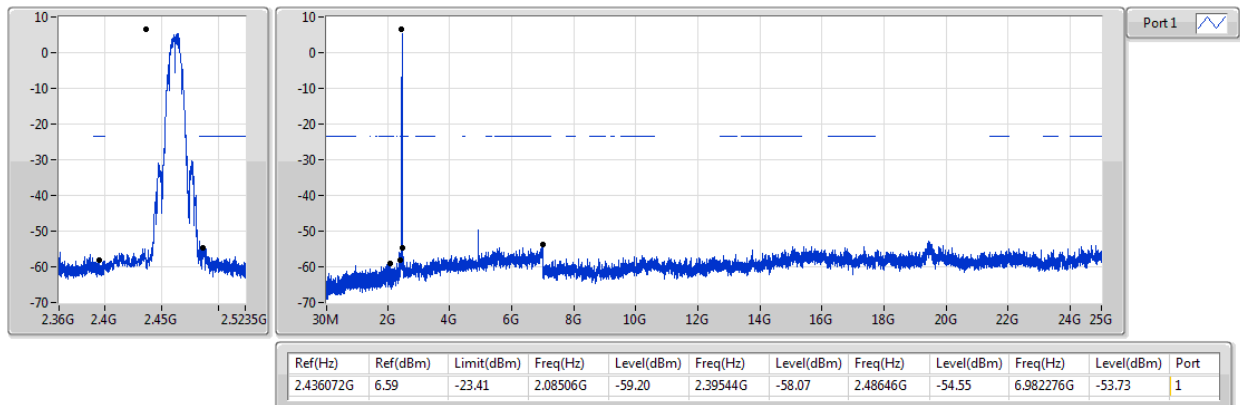


802.11g_Nss1,(6Mbps)_1TX

CSE NdB

2412MHz

09/11/2017

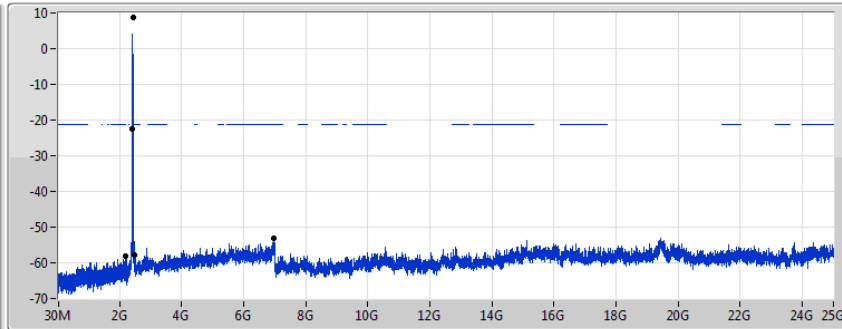



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.438243G	8.65	-21.35	2.17593G	-58.15	2.39984G	-22.41	2.48934G	-57.93	6.973847G	-53.22	1

802.11g_Nss1,(6Mbps)_1TX

CSE NdB

2437MHz

09/11/2017

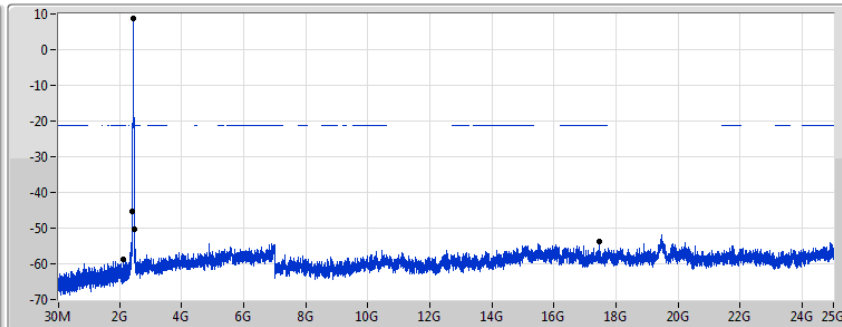



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.438243G	8.65	-21.35	2.10137G	-58.76	2.39984G	-45.25	2.48454G	-50.39	17.439467G	-53.69	1

802.11g_Nss1,(6Mbps)_1TX

CSE NdB

2462MHz

09/11/2017

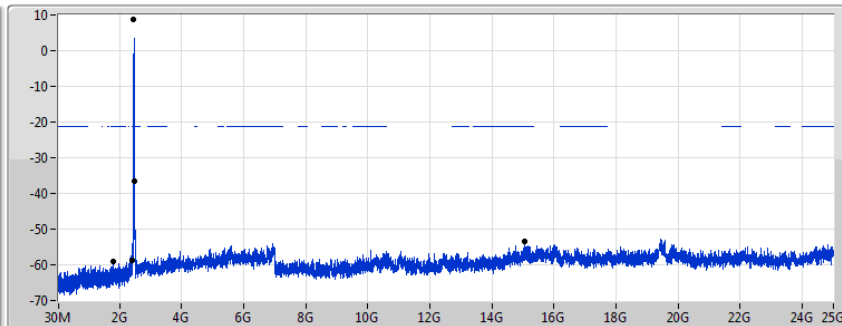


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.438243G	8.65	-21.35	1.780995G	-59.09	2.39176G	-58.74	2.48366G	-36.60	15.04853G	-53.46	1

802.11n HT20_Nss1,(MCS0)_1TX

CSE NdB

2412MHz

09/11/2017

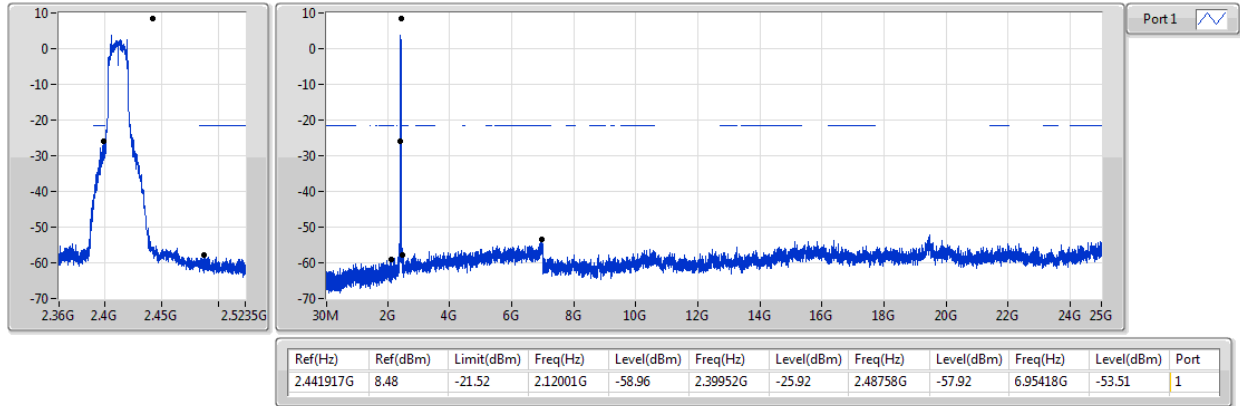


802.11n HT20_Nss1,(MCS0)_1TX

CSE NdB

2437MHz

09/11/2017

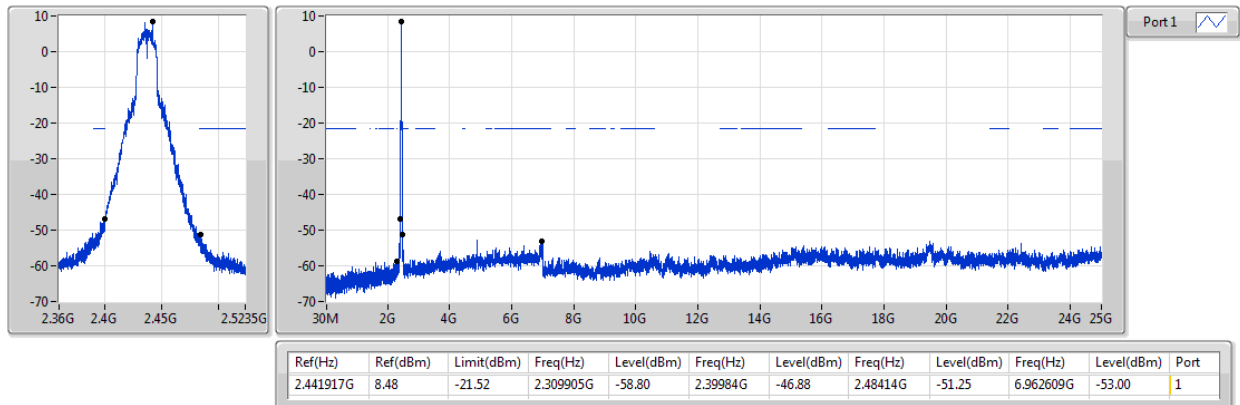


802.11n HT20_Nss1,(MCS0)_1TX

CSE NdB

2462MHz

09/11/2017


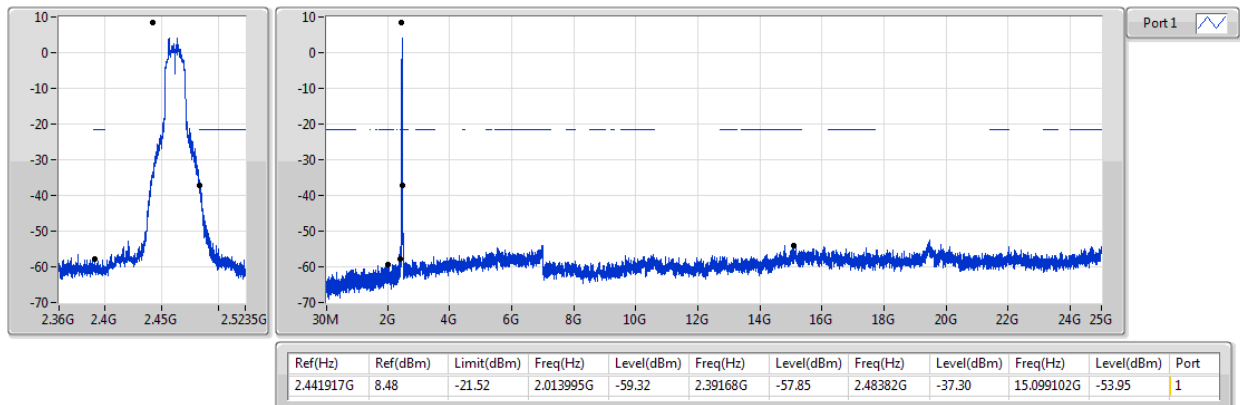


802.11n HT40_Nss1,(MCS0)_1TX

CSE NdB

2422MHz

09/11/2017

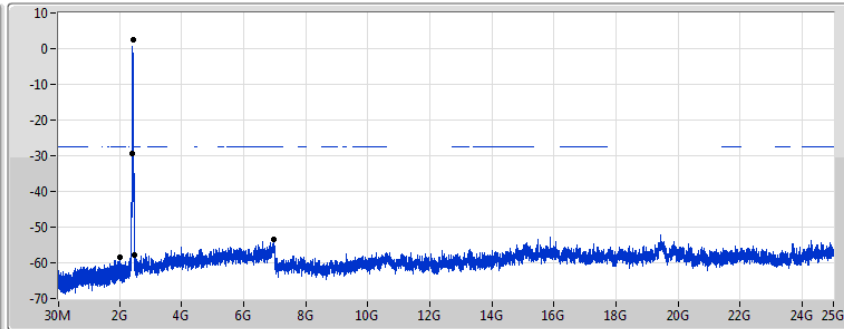

Port 1



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.440748G	2.61	-27.39	2.02001G	-58.38	2.39984G	-29.42	2.4891G	-57.93	6.975077G	-53.50	1

802.11n HT40_Nss1,(MCS0)_1TX

CSE NdB

2437MHz

09/11/2017

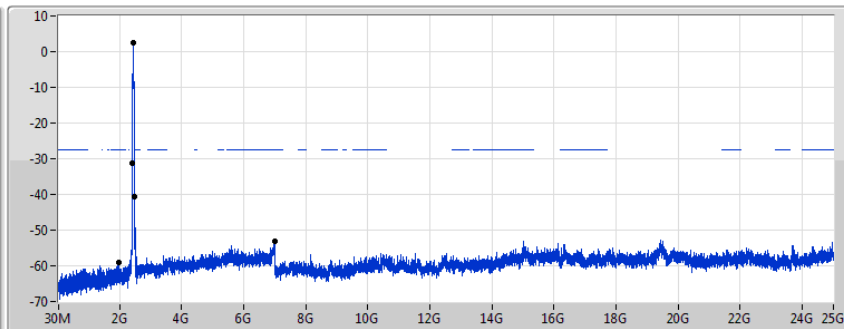

Port 1



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.440748G	2.61	-27.39	1.96734G	-59.16	2.39968G	-31.10	2.48414G	-40.71	6.986295G	-53.14	1

802.11n HT40_Nss1,(MCS0)_1TX

CSE NdB

2452MHz

09/11/2017

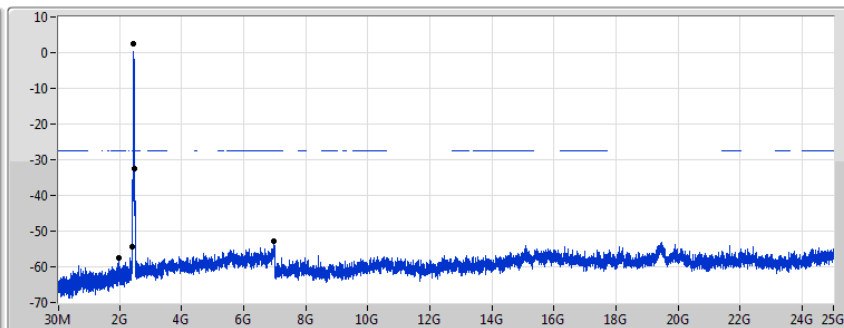

Port 1

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.440748G	2.61	-27.39	1.959325G	-57.61	2.39936G	-54.42	2.48446G	-32.61	6.980686G	-52.70	1

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11n HT40_Nss1,(MCS0)_1TX	Pass	PK	175.5M	40.10	43.50	-3.40	-19.89	3	Vertical	0	1.00	-


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2437MHz	Pass	PK	110.51M	30.84	43.50	-12.66	-18.87	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	193.93M	38.83	43.50	-4.67	-20.09	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	298.69M	42.03	46.00	-3.97	-15.11	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	375.32M	38.53	46.00	-7.47	-13.10	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	597.45M	32.64	46.00	-13.36	-8.40	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	976.72M	37.69	54.00	-16.31	-1.66	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	41.64M	33.40	40.00	-6.60	-18.52	3	Vertical	0	1.00	-
2437MHz	Pass	PK	175.5M	40.10	43.50	-3.40	-19.89	3	Vertical	0	1.00	-
2437MHz	Pass	PK	239.52M	33.45	46.00	-12.55	-17.41	3	Vertical	0	1.00	-
2437MHz	Pass	PK	375.32M	35.77	46.00	-10.23	-13.10	3	Vertical	0	1.00	-
2437MHz	Pass	PK	597.45M	30.53	46.00	-15.47	-8.40	3	Vertical	0	1.00	-
2437MHz	Pass	PK	777.87M	36.22	46.00	-9.78	-5.32	3	Vertical	0	1.00	-

802.11n HT40_Nss1,(MCS0)_1TX

2437MHz_Adapter

16/11/2017

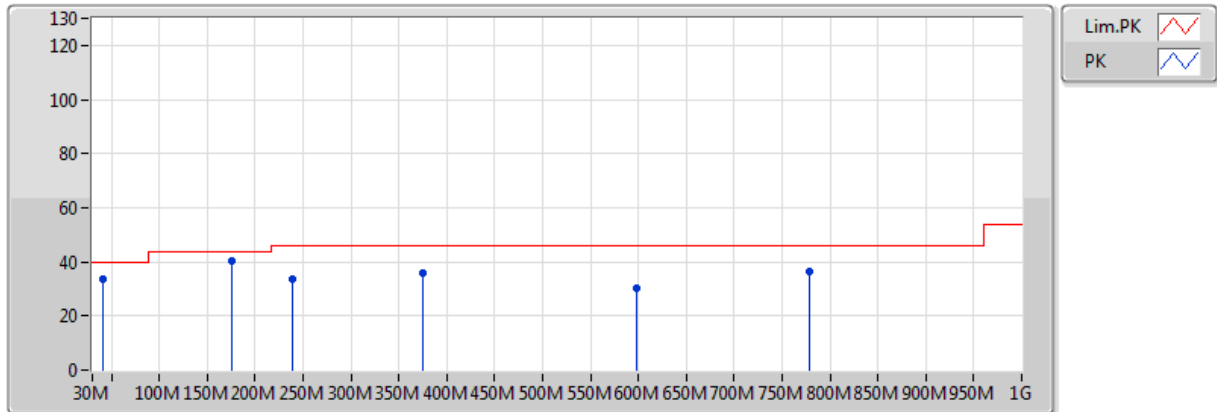


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	41.64M	33.40	40.00	-6.60	-18.52	3	Vertical	0	1.00	-	51.92	17.63	1.08	37.22
PK	175.5M	40.10	43.50	-3.40	-19.89	3	Vertical	0	1.00	-	59.99	14.42	2.17	36.48
PK	239.52M	33.45	46.00	-12.55	-17.41	3	Vertical	0	1.00	-	50.86	16.49	2.51	36.40
PK	375.32M	35.77	46.00	-10.23	-13.10	3	Vertical	0	1.00	-	48.87	20.25	3.22	36.57
PK	597.45M	30.53	46.00	-15.47	-8.40	3	Vertical	0	1.00	-	38.93	24.67	4.12	37.18
PK	777.87M	36.22	46.00	-9.78	-5.32	3	Vertical	0	1.00	-	41.54	27.37	4.77	37.45

802.11n HT40_Nss1,(MCS0)_1TX

2437MHz_Adapter

16/11/2017

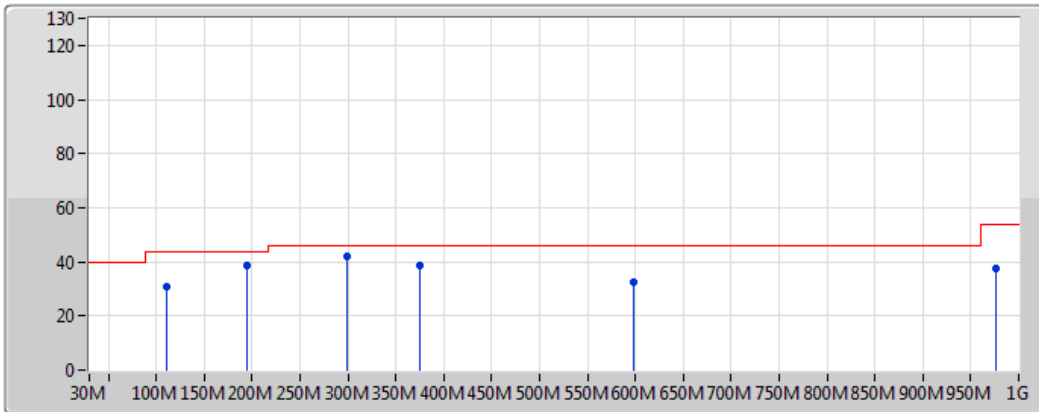

Lim.PK 
PK 

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	110.51M	30.84	43.50	-12.66	-18.87	3	Horizontal	360	1.00	-	49.71	16.18	1.70	36.76
PK	193.93M	38.83	43.50	-4.67	-20.09	3	Horizontal	360	1.00	-	58.92	14.05	2.27	36.40
PK	298.69M	42.03	46.00	-3.97	-15.11	3	Horizontal	360	1.00	-	57.14	18.36	2.97	36.44
PK	375.32M	38.53	46.00	-7.47	-13.10	3	Horizontal	360	1.00	-	51.63	20.25	3.22	36.57
PK	597.45M	32.64	46.00	-13.36	-8.40	3	Horizontal	360	1.00	-	41.04	24.67	4.12	37.18
PK	976.72M	37.69	54.00	-16.31	-1.66	3	Horizontal	360	1.00	-	39.35	30.10	5.47	37.23

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	AV	4.874G	50.90	54.00	-3.10	6.01	3	Vertical	156	1.08	-
802.11g_Nss1,(6Mbps)_1TX	Pass	AV	2.483502G	52.98	54.00	-1.02	30.79	3	Vertical	214	1.57	-
802.11n HT20_Nss1,(MCS0)_1TX	Pass	AV	2.39G	52.48	54.00	-1.52	30.45	3	Vertical	216	1.50	-
802.11n HT40_Nss1,(MCS0)_1TX	Pass	AV	2.389998G	52.79	54.00	-1.21	30.45	3	Vertical	216	1.48	-

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.3892G	42.69	54.00	-11.31	30.93	3	Horizontal	218	1.34	-
2412MHz	Pass	AV	2.4102G	92.83	Inf	-Inf	31.01	3	Horizontal	218	1.34	-
2412MHz	Pass	PK	2.3832G	54.25	74.00	-19.75	30.91	3	Horizontal	218	1.34	-
2412MHz	Pass	PK	2.411G	96.63	Inf	-Inf	31.01	3	Horizontal	218	1.34	-
2412MHz	Pass	AV	2.385G	42.75	54.00	-11.25	30.92	3	Vertical	118	1.03	-
2412MHz	Pass	AV	2.4102G	94.98	Inf	-Inf	31.01	3	Vertical	118	1.03	-
2412MHz	Pass	PK	2.3696G	54.28	74.00	-19.72	30.86	3	Vertical	118	1.03	-
2412MHz	Pass	PK	2.411G	98.74	Inf	-Inf	31.01	3	Vertical	118	1.03	-
2412MHz	Pass	AV	4.824G	41.88	54.00	-12.12	5.90	3	Horizontal	184	1.76	-
2412MHz	Pass	PK	4.824G	48.34	74.00	-25.66	5.90	3	Horizontal	184	1.76	-
2412MHz	Pass	AV	4.824G	50.64	54.00	-3.36	5.90	3	Vertical	158	1.05	-
2412MHz	Pass	PK	4.824G	53.85	74.00	-20.15	5.90	3	Vertical	158	1.05	-
2437MHz	Pass	AV	2.389G	42.73	54.00	-11.27	30.93	3	Horizontal	217	1.50	-
2437MHz	Pass	AV	2.4354G	92.61	Inf	-Inf	31.10	3	Horizontal	217	1.50	-
2437MHz	Pass	AV	2.4974G	43.37	54.00	-10.63	31.32	3	Horizontal	217	1.50	-
2437MHz	Pass	PK	2.381G	54.41	74.00	-19.59	30.90	3	Horizontal	217	1.50	-
2437MHz	Pass	PK	2.4362G	96.47	Inf	-Inf	31.10	3	Horizontal	217	1.50	-
2437MHz	Pass	PK	2.485G	54.73	74.00	-19.27	31.28	3	Horizontal	217	1.50	-
2437MHz	Pass	AV	2.389G	42.85	54.00	-11.15	30.93	3	Vertical	119	1.17	-
2437MHz	Pass	AV	2.4362G	94.97	Inf	-Inf	31.10	3	Vertical	119	1.17	-
2437MHz	Pass	AV	2.499998G	43.36	54.00	-10.64	31.33	3	Vertical	119	1.17	-
2437MHz	Pass	PK	2.3862G	54.42	74.00	-19.58	30.92	3	Vertical	119	1.17	-
2437MHz	Pass	PK	2.4362G	98.87	Inf	-Inf	31.10	3	Vertical	119	1.17	-
2437MHz	Pass	PK	2.4862G	54.98	74.00	-19.02	31.28	3	Vertical	119	1.17	-
2437MHz	Pass	AV	4.874G	43.52	54.00	-10.48	6.01	3	Horizontal	184	1.29	-
2437MHz	Pass	PK	4.874G	48.80	74.00	-25.20	6.01	3	Horizontal	184	1.29	-
2437MHz	Pass	AV	4.874G	50.90	54.00	-3.10	6.01	3	Vertical	156	1.08	-
2437MHz	Pass	PK	4.874G	53.42	74.00	-20.58	6.01	3	Vertical	156	1.08	-
2462MHz	Pass	AV	2.4636G	91.86	Inf	-Inf	31.20	3	Horizontal	215	1.06	-
2462MHz	Pass	AV	2.4888G	43.45	54.00	-10.55	31.29	3	Horizontal	215	1.06	-
2462MHz	Pass	PK	2.463G	95.80	Inf	-Inf	31.20	3	Horizontal	215	1.06	-
2462MHz	Pass	PK	2.4836G	54.63	74.00	-19.37	31.27	3	Horizontal	215	1.06	-
2462MHz	Pass	AV	2.4638G	93.61	Inf	-Inf	31.20	3	Vertical	104	1.49	-
2462MHz	Pass	AV	2.4878G	43.67	54.00	-10.33	31.29	3	Vertical	104	1.49	-
2462MHz	Pass	PK	2.463G	97.38	Inf	-Inf	31.20	3	Vertical	104	1.49	-
2462MHz	Pass	PK	2.496G	54.88	74.00	-19.12	31.32	3	Vertical	104	1.49	-
2462MHz	Pass	AV	4.924G	44.89	54.00	-9.11	6.13	3	Horizontal	200	1.94	-
2462MHz	Pass	PK	4.924G	49.65	74.00	-24.35	6.13	3	Horizontal	200	1.94	-
2462MHz	Pass	AV	4.924G	50.51	54.00	-3.49	6.13	3	Vertical	158	1.39	-
2462MHz	Pass	PK	4.924G	53.47	74.00	-20.53	6.13	3	Vertical	158	1.39	-
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.39G	50.43	54.00	-3.57	30.45	3	Horizontal	206	1.84	-
2412MHz	Pass	AV	2.4098G	93.88	Inf	-Inf	30.53	3	Horizontal	206	1.84	-
2412MHz	Pass	PK	2.39G	61.55	74.00	-12.45	30.45	3	Horizontal	206	1.84	-
2412MHz	Pass	PK	2.4092G	102.45	Inf	-Inf	30.52	3	Horizontal	206	1.84	-
2412MHz	Pass	AV	2.39G	52.89	54.00	-1.11	30.45	3	Vertical	214	1.72	-
2412MHz	Pass	AV	2.411G	98.33	Inf	-Inf	30.53	3	Vertical	214	1.72	-

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2412MHz	Pass	PK	2.39G	66.60	74.00	-7.40	30.45	3	Vertical	214	1.72	-
2412MHz	Pass	PK	2.4102G	107.08	Inf	-Inf	30.53	3	Vertical	214	1.72	-
2412MHz	Pass	AV	4.82388G	32.68	54.00	-21.32	2.10	3	Horizontal	176	1.50	-
2412MHz	Pass	PK	4.82706G	46.57	74.00	-27.43	2.11	3	Horizontal	176	1.50	-
2412MHz	Pass	AV	4.82622G	37.77	54.00	-16.23	2.11	3	Vertical	147	1.92	-
2412MHz	Pass	PK	4.81974G	51.34	74.00	-22.66	2.09	3	Vertical	147	1.92	-
2437MHz	Pass	AV	2.3898G	43.27	54.00	-10.73	30.93	3	Horizontal	217	1.50	-
2437MHz	Pass	AV	2.4362G	93.13	Inf	-Inf	31.10	3	Horizontal	217	1.50	-
2437MHz	Pass	AV	2.4858G	43.66	54.00	-10.34	31.28	3	Horizontal	217	1.50	-
2437MHz	Pass	PK	2.3894G	53.73	74.00	-20.27	30.93	3	Horizontal	217	1.50	-
2437MHz	Pass	PK	2.435G	103.23	Inf	-Inf	31.10	3	Horizontal	217	1.50	-
2437MHz	Pass	PK	2.4838G	55.34	74.00	-18.66	31.27	3	Horizontal	217	1.50	-
2437MHz	Pass	AV	2.3886G	43.38	54.00	-10.62	30.93	3	Vertical	120	1.16	-
2437MHz	Pass	AV	2.4358G	95.27	Inf	-Inf	31.10	3	Vertical	120	1.16	-
2437MHz	Pass	AV	2.483502G	43.77	54.00	-10.23	31.27	3	Vertical	120	1.16	-
2437MHz	Pass	PK	2.3898G	53.68	74.00	-20.32	30.93	3	Vertical	120	1.16	-
2437MHz	Pass	PK	2.4342G	105.17	Inf	-Inf	31.09	3	Vertical	120	1.16	-
2437MHz	Pass	PK	2.4986G	54.95	74.00	-19.05	31.32	3	Vertical	120	1.16	-
2437MHz	Pass	AV	4.874G	41.16	54.00	-12.84	6.01	3	Horizontal	182	1.29	-
2437MHz	Pass	PK	4.874G	54.56	74.00	-19.44	6.01	3	Horizontal	182	1.29	-
2437MHz	Pass	AV	4.874G	48.87	54.00	-5.13	6.01	3	Vertical	158	1.13	-
2437MHz	Pass	PK	4.874G	62.84	74.00	-11.16	6.01	3	Vertical	158	1.13	-
2462MHz	Pass	AV	2.4636G	92.87	Inf	-Inf	30.72	3	Horizontal	204	1.95	-
2462MHz	Pass	AV	2.483502G	49.74	54.00	-4.26	30.79	3	Horizontal	204	1.95	-
2462MHz	Pass	PK	2.4646G	101.96	Inf	-Inf	30.72	3	Horizontal	204	1.95	-
2462MHz	Pass	PK	2.4844G	60.26	74.00	-13.74	30.79	3	Horizontal	204	1.95	-
2462MHz	Pass	AV	2.4628G	97.67	Inf	-Inf	30.72	3	Vertical	214	1.57	-
2462MHz	Pass	AV	2.483502G	52.98	54.00	-1.02	30.79	3	Vertical	214	1.57	-
2462MHz	Pass	PK	2.46G	106.36	Inf	-Inf	30.71	3	Vertical	214	1.57	-
2462MHz	Pass	PK	2.483502G	64.57	74.00	-9.43	30.79	3	Vertical	214	1.57	-
2462MHz	Pass	AV	4.92406G	34.15	54.00	-19.85	2.41	3	Horizontal	353	1.48	-
2462MHz	Pass	PK	4.9246G	47.88	74.00	-26.12	2.42	3	Horizontal	353	1.48	-
2462MHz	Pass	AV	4.9243G	39.43	54.00	-14.57	2.42	3	Vertical	151	1.72	-
2462MHz	Pass	PK	4.9219G	53.24	74.00	-20.76	2.41	3	Vertical	151	1.72	-
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.39G	49.30	54.00	-4.70	30.45	3	Horizontal	205	1.84	-
2412MHz	Pass	AV	2.4104G	92.81	Inf	-Inf	30.53	3	Horizontal	205	1.84	-
2412MHz	Pass	PK	2.39G	59.55	74.00	-14.45	30.45	3	Horizontal	205	1.84	-
2412MHz	Pass	PK	2.4102G	101.45	Inf	-Inf	30.53	3	Horizontal	205	1.84	-
2412MHz	Pass	AV	2.39G	52.48	54.00	-1.52	30.45	3	Vertical	216	1.50	-
2412MHz	Pass	AV	2.4098G	96.90	Inf	-Inf	30.53	3	Vertical	216	1.50	-
2412MHz	Pass	PK	2.3898G	64.23	74.00	-9.77	30.45	3	Vertical	216	1.50	-
2412MHz	Pass	PK	2.4106G	105.62	Inf	-Inf	30.53	3	Vertical	216	1.50	-
2412MHz	Pass	AV	4.82364G	31.68	54.00	-22.32	2.10	3	Horizontal	177	1.50	-
2412MHz	Pass	PK	4.82214G	44.49	74.00	-29.51	2.10	3	Horizontal	177	1.50	-
2412MHz	Pass	AV	4.82646G	35.57	54.00	-18.43	2.11	3	Vertical	150	1.94	-
2412MHz	Pass	PK	4.82586G	49.63	74.00	-24.37	2.11	3	Vertical	150	1.94	-
2437MHz	Pass	AV	2.3898G	43.20	54.00	-10.80	30.93	3	Horizontal	217	1.51	-
2437MHz	Pass	AV	2.435G	92.96	Inf	-Inf	31.10	3	Horizontal	217	1.51	-


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2437MHz	Pass	AV	2.4862G	43.67	54.00	-10.33	31.28	3	Horizontal	217	1.51	-
2437MHz	Pass	PK	2.389G	54.40	74.00	-19.60	30.93	3	Horizontal	217	1.51	-
2437MHz	Pass	PK	2.4346G	103.03	Inf	-Inf	31.09	3	Horizontal	217	1.51	-
2437MHz	Pass	PK	2.4978G	54.98	74.00	-19.02	31.32	3	Horizontal	217	1.51	-
2437MHz	Pass	AV	2.389G	43.56	54.00	-10.44	30.93	3	Vertical	120	1.45	-
2437MHz	Pass	AV	2.4354G	95.36	Inf	-Inf	31.10	3	Vertical	120	1.45	-
2437MHz	Pass	AV	2.483502G	43.90	54.00	-10.10	31.27	3	Vertical	120	1.45	-
2437MHz	Pass	PK	2.389G	54.16	74.00	-19.84	30.93	3	Vertical	120	1.45	-
2437MHz	Pass	PK	2.4406G	106.13	Inf	-Inf	31.12	3	Vertical	120	1.45	-
2437MHz	Pass	PK	2.4902G	54.99	74.00	-19.01	31.29	3	Vertical	120	1.45	-
2437MHz	Pass	AV	4.874G	41.89	54.00	-12.11	6.01	3	Horizontal	183	1.27	-
2437MHz	Pass	PK	4.874G	54.99	74.00	-19.01	6.01	3	Horizontal	183	1.27	-
2437MHz	Pass	AV	4.874G	48.43	54.00	-5.57	6.01	3	Vertical	155	1.08	-
2437MHz	Pass	PK	4.874G	62.62	74.00	-11.38	6.01	3	Vertical	155	1.08	-
2462MHz	Pass	AV	2.463G	91.61	Inf	-Inf	30.72	3	Horizontal	203	1.97	-
2462MHz	Pass	AV	2.4836G	49.32	54.00	-4.68	30.79	3	Horizontal	203	1.97	-
2462MHz	Pass	PK	2.462G	100.61	Inf	-Inf	30.71	3	Horizontal	203	1.97	-
2462MHz	Pass	PK	2.4836G	59.90	74.00	-14.10	30.79	3	Horizontal	203	1.97	-
2462MHz	Pass	AV	2.461G	96.47	Inf	-Inf	30.71	3	Vertical	214	1.59	-
2462MHz	Pass	AV	2.483502G	51.60	54.00	-2.40	30.79	3	Vertical	214	1.59	-
2462MHz	Pass	PK	2.4644G	105.65	Inf	-Inf	30.72	3	Vertical	214	1.59	-
2462MHz	Pass	PK	2.483502G	62.88	74.00	-11.12	30.79	3	Vertical	214	1.59	-
2462MHz	Pass	AV	4.9267G	33.01	54.00	-20.99	2.42	3	Horizontal	351	1.72	-
2462MHz	Pass	PK	4.9183G	46.07	74.00	-27.93	2.40	3	Horizontal	351	1.72	-
2462MHz	Pass	AV	4.92508G	36.85	54.00	-17.15	2.42	3	Vertical	169	1.73	-
2462MHz	Pass	PK	4.92526G	51.24	74.00	-22.76	2.42	3	Vertical	169	1.73	-
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	AV	2.3896G	50.94	54.00	-3.06	30.45	3	Horizontal	206	1.77	-
2422MHz	Pass	AV	2.4188G	87.68	Inf	-Inf	30.56	3	Horizontal	206	1.77	-
2422MHz	Pass	AV	2.4984G	48.27	54.00	-5.73	30.84	3	Horizontal	206	1.77	-
2422MHz	Pass	PK	2.3828G	59.65	74.00	-14.35	30.43	3	Horizontal	206	1.77	-
2422MHz	Pass	PK	2.4184G	95.73	Inf	-Inf	30.56	3	Horizontal	206	1.77	-
2422MHz	Pass	PK	2.496G	58.48	74.00	-15.52	30.84	3	Horizontal	206	1.77	-
2422MHz	Pass	AV	2.3896G	52.75	54.00	-1.25	30.45	3	Vertical	217	1.23	-
2422MHz	Pass	AV	2.4172G	91.28	Inf	-Inf	30.55	3	Vertical	217	1.23	-
2422MHz	Pass	AV	2.4836G	47.65	54.00	-6.35	30.79	3	Vertical	217	1.23	-
2422MHz	Pass	PK	2.39G	64.03	74.00	-9.97	30.45	3	Vertical	217	1.23	-
2422MHz	Pass	PK	2.4184G	100.29	Inf	-Inf	30.56	3	Vertical	217	1.23	-
2422MHz	Pass	PK	2.4992G	58.93	74.00	-15.07	30.85	3	Vertical	217	1.23	-
2422MHz	Pass	AV	4.83482G	30.83	54.00	-23.17	2.14	3	Horizontal	79	1.50	-
2422MHz	Pass	PK	4.83314G	43.22	74.00	-30.78	2.13	3	Horizontal	79	1.50	-
2422MHz	Pass	AV	4.83818G	31.77	54.00	-22.23	2.15	3	Vertical	160	1.05	-
2422MHz	Pass	PK	4.83578G	44.16	74.00	-29.84	2.14	3	Vertical	160	1.05	-
2437MHz	Pass	AV	2.389998G	49.49	54.00	-4.51	30.45	3	Horizontal	204	1.81	-
2437MHz	Pass	AV	2.4298G	89.59	Inf	-Inf	30.60	3	Horizontal	204	1.81	-
2437MHz	Pass	AV	2.483502G	48.87	54.00	-5.13	30.79	3	Horizontal	204	1.81	-
2437MHz	Pass	PK	2.389998G	60.07	74.00	-13.93	30.45	3	Horizontal	204	1.81	-
2437MHz	Pass	PK	2.433G	98.45	Inf	-Inf	30.61	3	Horizontal	204	1.81	-
2437MHz	Pass	PK	2.4838G	58.93	74.00	-15.07	30.79	3	Horizontal	204	1.81	-

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2437MHz	Pass	AV	2.389998G	52.79	54.00	-1.21	30.45	3	Vertical	216	1.48	-
2437MHz	Pass	AV	2.4318G	94.48	Inf	-Inf	30.60	3	Vertical	216	1.48	-
2437MHz	Pass	AV	2.4838G	51.08	54.00	-2.92	30.79	3	Vertical	216	1.48	-
2437MHz	Pass	PK	2.3886G	62.05	74.00	-11.95	30.45	3	Vertical	216	1.48	-
2437MHz	Pass	PK	2.431G	102.16	Inf	-Inf	30.60	3	Vertical	216	1.48	-
2437MHz	Pass	PK	2.4846G	60.20	74.00	-13.80	30.79	3	Vertical	216	1.48	-
2437MHz	Pass	AV	4.874G	35.32	54.00	-18.68	6.01	3	Horizontal	256	1.50	-
2437MHz	Pass	PK	4.874G	48.17	74.00	-25.83	6.01	3	Horizontal	256	1.50	-
2437MHz	Pass	AV	4.874G	38.51	54.00	-15.49	6.01	3	Vertical	335	1.92	-
2437MHz	Pass	PK	4.874G	50.93	74.00	-23.07	6.01	3	Vertical	335	1.92	-
2452MHz	Pass	AV	2.3584G	47.86	54.00	-6.14	30.34	3	Horizontal	205	1.70	-
2452MHz	Pass	AV	2.4468G	86.57	Inf	-Inf	30.66	3	Horizontal	205	1.70	-
2452MHz	Pass	AV	2.4852G	49.31	54.00	-4.69	30.80	3	Horizontal	205	1.70	-
2452MHz	Pass	PK	2.37G	57.98	74.00	-16.02	30.38	3	Horizontal	205	1.70	-
2452MHz	Pass	PK	2.4464G	95.17	Inf	-Inf	30.66	3	Horizontal	205	1.70	-
2452MHz	Pass	PK	2.4856G	59.39	74.00	-14.61	30.80	3	Horizontal	205	1.70	-
2452MHz	Pass	AV	2.3768G	48.23	54.00	-5.77	30.41	3	Vertical	214	1.67	-
2452MHz	Pass	AV	2.4468G	91.11	Inf	-Inf	30.66	3	Vertical	214	1.67	-
2452MHz	Pass	AV	2.4836G	52.24	54.00	-1.76	30.79	3	Vertical	214	1.67	-
2452MHz	Pass	PK	2.3804G	58.14	74.00	-15.86	30.42	3	Vertical	214	1.67	-
2452MHz	Pass	PK	2.4444G	99.65	Inf	-Inf	30.65	3	Vertical	214	1.67	-
2452MHz	Pass	PK	2.4852G	61.20	74.00	-12.80	30.80	3	Vertical	214	1.67	-
2452MHz	Pass	AV	4.90916G	31.87	54.00	-22.13	2.37	3	Horizontal	360	2.09	-
2452MHz	Pass	PK	4.91072G	44.17	74.00	-29.83	2.37	3	Horizontal	360	2.09	-
2452MHz	Pass	AV	4.90178G	33.32	54.00	-20.68	2.35	3	Vertical	164	1.92	-
2452MHz	Pass	PK	4.89542G	44.95	74.00	-29.05	2.33	3	Vertical	164	1.92	-

802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

16/11/2017

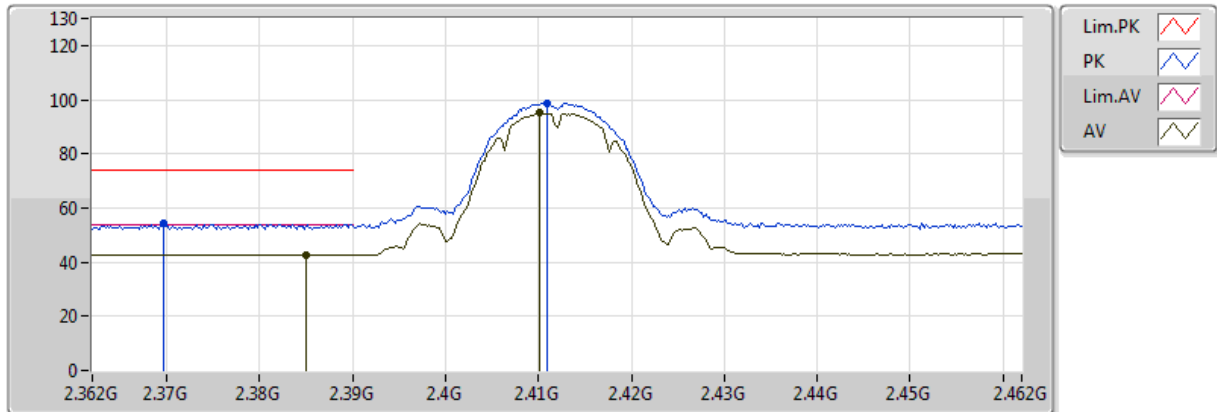


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.385G	42.75	54.00	-11.25	30.92	3	Vertical	118	1.03	-	11.83	27.30	3.62	-
AV	2.4102G	94.98	Inf	-Inf	31.01	3	Vertical	118	1.03	-	63.97	27.37	3.64	-
PK	2.3696G	54.28	74.00	-19.72	30.86	3	Vertical	118	1.03	-	23.42	27.26	3.60	-
PK	2.411G	98.74	Inf	-Inf	31.01	3	Vertical	118	1.03	-	67.74	27.37	3.64	-

802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

16/11/2017

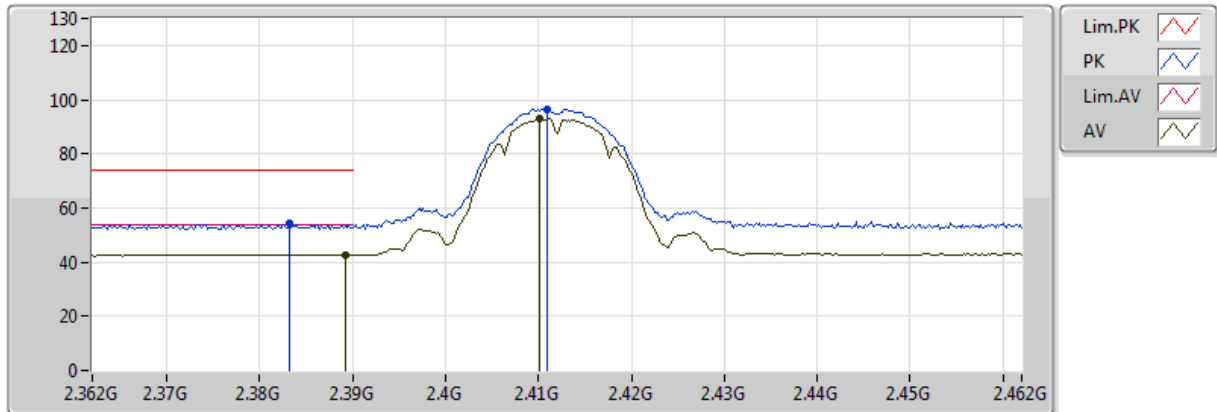


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.3892G	42.69	54.00	-11.31	30.93	3	Horizontal	218	1.34	-	11.76	27.31	3.62	-
AV	2.4102G	92.83	Inf	-Inf	31.01	3	Horizontal	218	1.34	-	61.82	27.37	3.64	-
PK	2.3832G	54.25	74.00	-19.75	30.91	3	Horizontal	218	1.34	-	23.34	27.30	3.61	-
PK	2.411G	96.63	Inf	-Inf	31.01	3	Horizontal	218	1.34	-	65.62	27.37	3.64	-

802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

16/11/2017

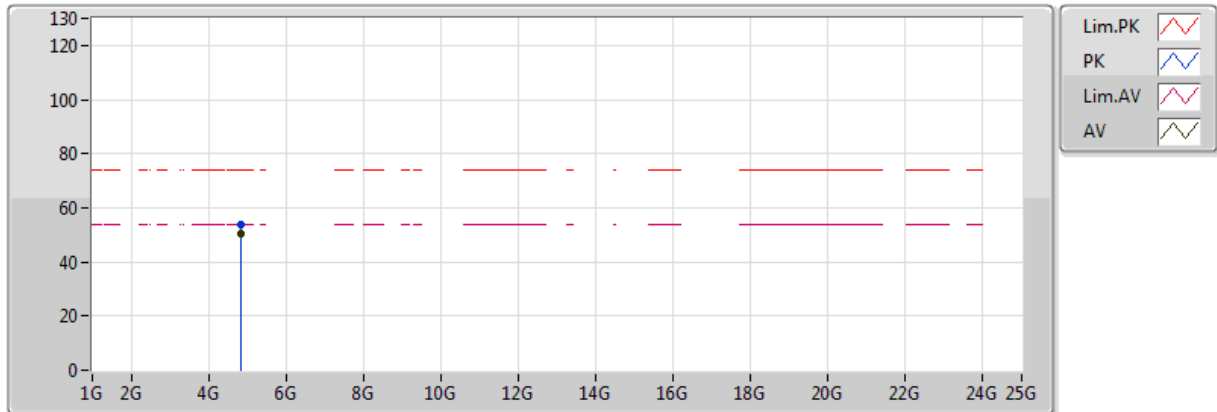


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.824G	50.64	54.00	-3.36	5.90	3	Vertical	158	1.05	-	44.74	31.22	4.52	29.85
PK	4.824G	53.85	74.00	-20.15	5.90	3	Vertical	158	1.05	-	47.95	31.22	4.52	29.85

802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

16/11/2017

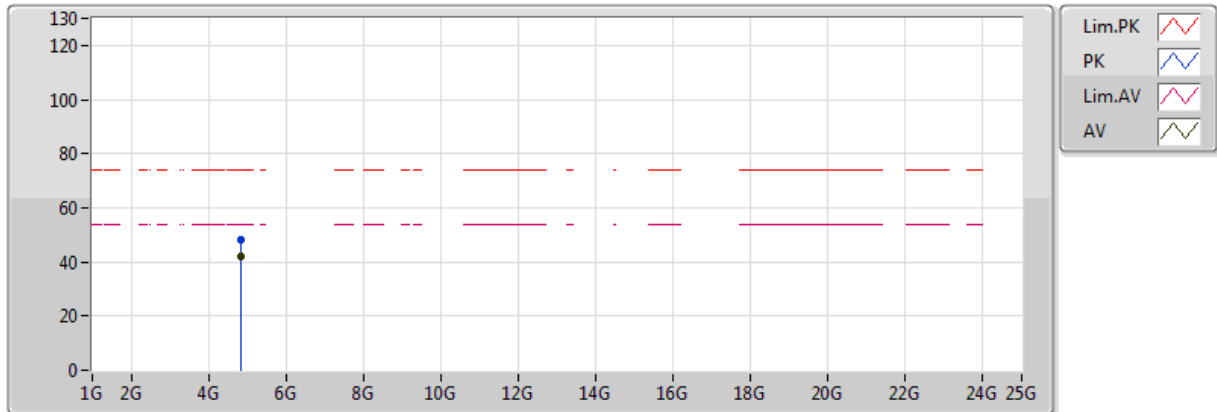


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.824G	41.88	54.00	-12.12	5.90	3	Horizontal	184	1.76	-	35.98	31.22	4.52	29.85
PK	4.824G	48.34	74.00	-25.66	5.90	3	Horizontal	184	1.76	-	42.44	31.22	4.52	29.85

802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

16/11/2017

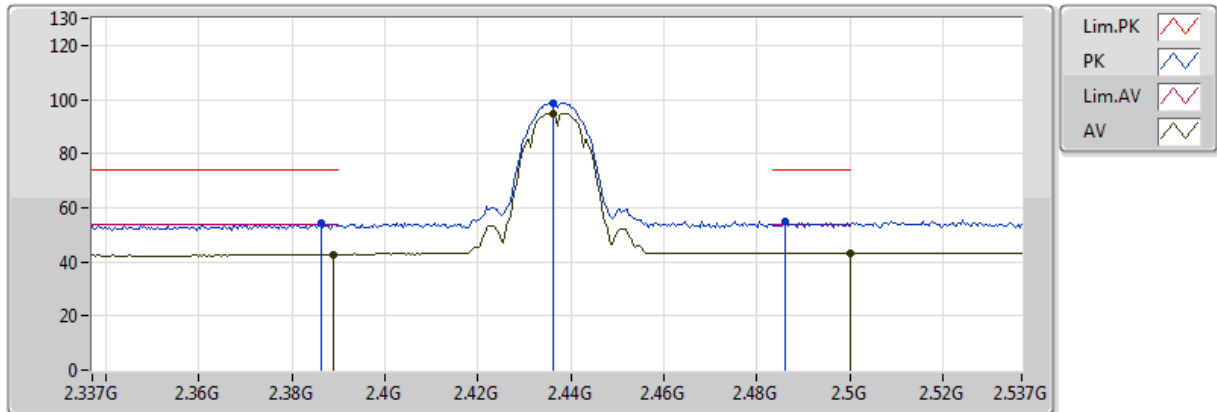


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.389G	42.85	54.00	-11.15	30.93	3	Vertical	119	1.17	-	11.92	27.31	3.62	-
AV	2.4362G	94.97	Inf	-Inf	31.10	3	Vertical	119	1.17	-	63.87	27.43	3.67	-
AV	2.499998G	43.36	54.00	-10.64	31.33	3	Vertical	119	1.17	-	12.03	27.60	3.73	-
PK	2.3862G	54.42	74.00	-19.58	30.92	3	Vertical	119	1.17	-	23.50	27.30	3.62	-
PK	2.4362G	98.87	Inf	-Inf	31.10	3	Vertical	119	1.17	-	67.77	27.43	3.67	-
PK	2.4862G	54.98	74.00	-19.02	31.28	3	Vertical	119	1.17	-	23.70	27.56	3.72	-

802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

16/11/2017

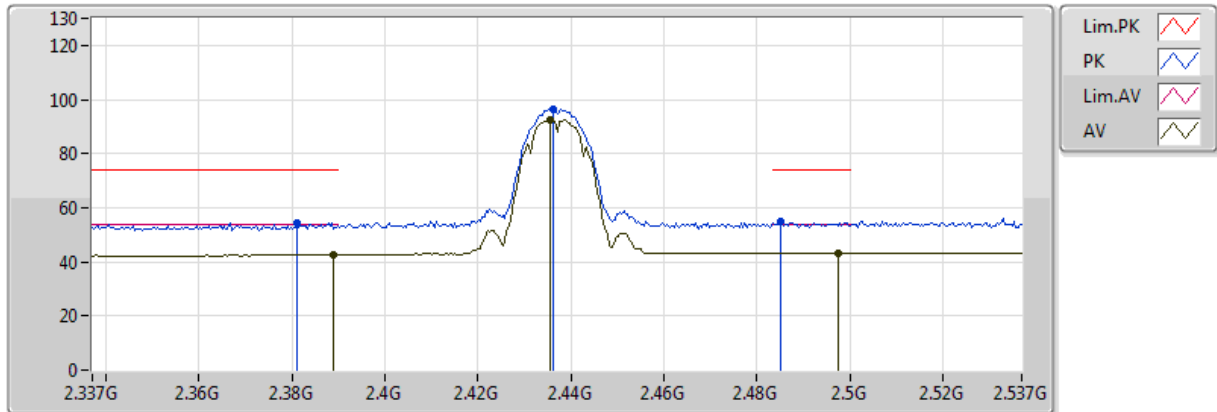


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.389G	42.73	54.00	-11.27	30.93	3	Horizontal	217	1.50	-	11.80	27.31	3.62	-
AV	2.4354G	92.61	Inf	-Inf	31.10	3	Horizontal	217	1.50	-	61.51	27.43	3.67	-
AV	2.4974G	43.37	54.00	-10.63	31.32	3	Horizontal	217	1.50	-	12.05	27.59	3.73	-
PK	2.381G	54.41	74.00	-19.59	30.90	3	Horizontal	217	1.50	-	23.51	27.29	3.61	-
PK	2.4362G	96.47	Inf	-Inf	31.10	3	Horizontal	217	1.50	-	65.37	27.43	3.67	-
PK	2.485G	54.73	74.00	-19.27	31.28	3	Horizontal	217	1.50	-	23.45	27.56	3.71	-

802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

16/11/2017

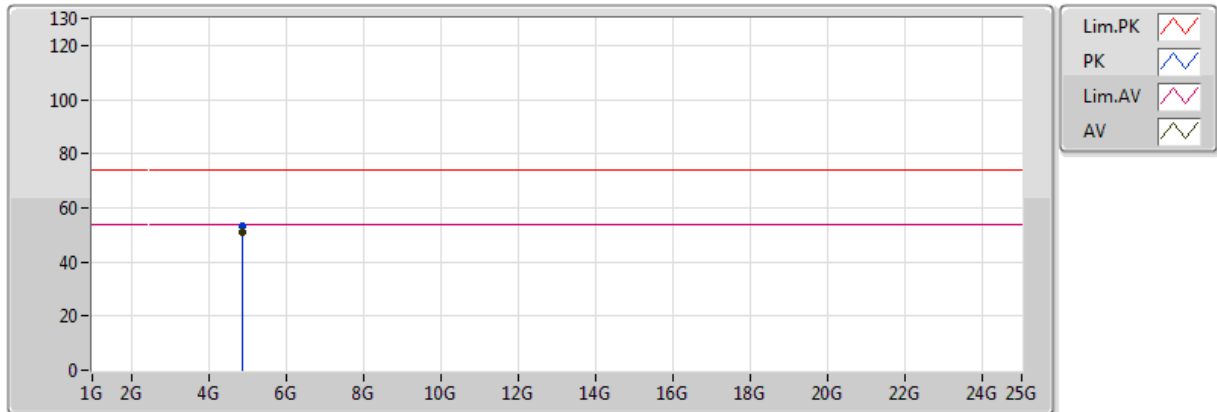


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.874G	50.90	54.00	-3.10	6.01	3	Vertical	156	1.08	-	44.89	31.30	4.55	29.84
PK	4.874G	53.42	74.00	-20.58	6.01	3	Vertical	156	1.08	-	47.41	31.30	4.55	29.84

802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

16/11/2017

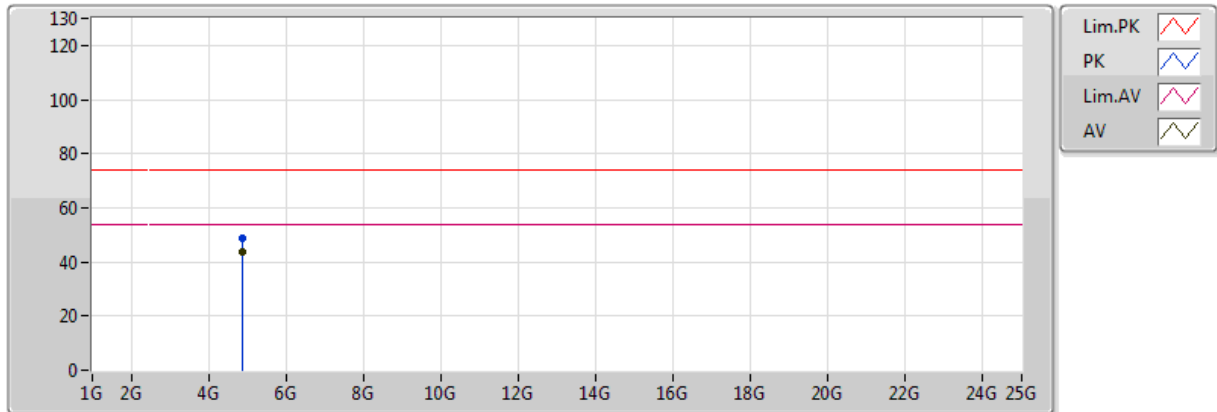


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.874G	43.52	54.00	-10.48	6.01	3	Horizontal	184	1.29	-	37.51	31.30	4.55	29.84
PK	4.874G	48.80	74.00	-25.20	6.01	3	Horizontal	184	1.29	-	42.79	31.30	4.55	29.84

802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

16/11/2017

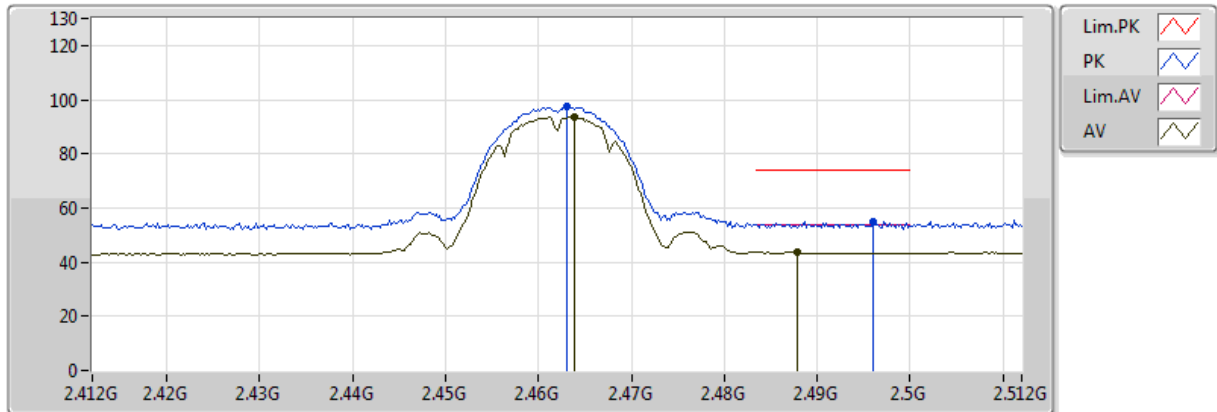


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.4638G	93.61	Inf	-Inf	31.20	3	Vertical	104	1.49	-	62.41	27.51	3.69	-
AV	2.4878G	43.67	54.00	-10.33	31.29	3	Vertical	104	1.49	-	12.39	27.57	3.72	-
PK	2.463G	97.38	Inf	-Inf	31.20	3	Vertical	104	1.49	-	66.18	27.50	3.69	-
PK	2.496G	54.88	74.00	-19.12	31.32	3	Vertical	104	1.49	-	23.57	27.59	3.73	-

802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

16/11/2017

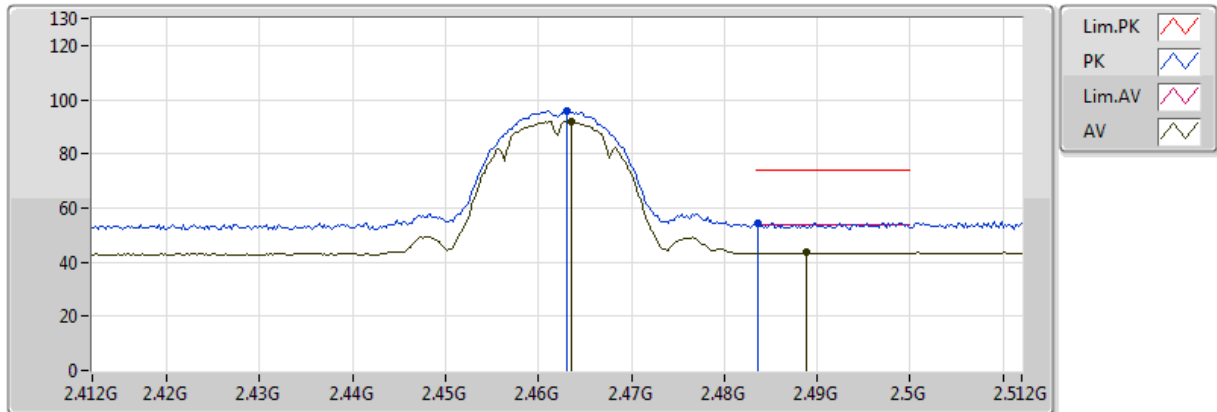


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.4636G	91.86	Inf	-Inf	31.20	3	Horizontal	215	1.06	-	60.66	27.51	3.69	-
AV	2.4888G	43.45	54.00	-10.55	31.29	3	Horizontal	215	1.06	-	12.16	27.57	3.72	-
PK	2.463G	95.80	Inf	-Inf	31.20	3	Horizontal	215	1.06	-	64.60	27.50	3.69	-
PK	2.4836G	54.63	74.00	-19.37	31.27	3	Horizontal	215	1.06	-	23.36	27.56	3.71	-

802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

16/11/2017

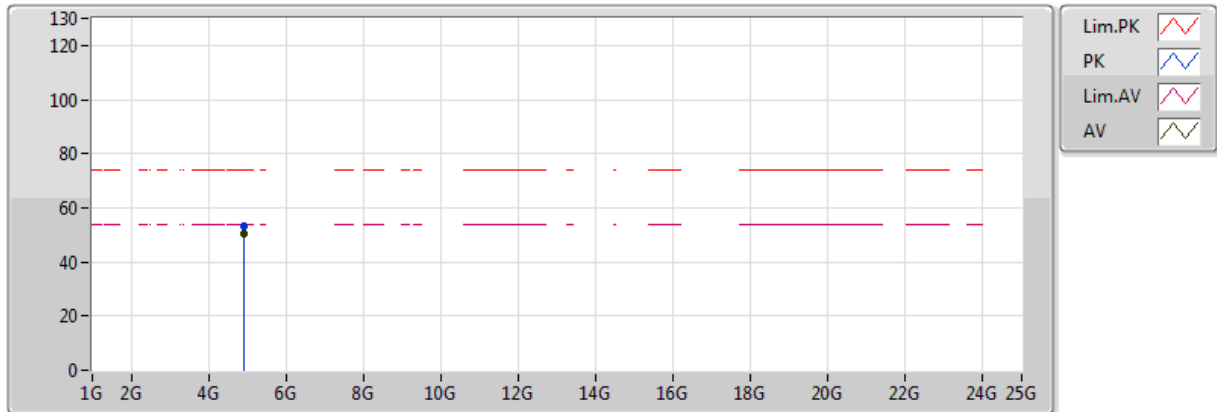


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.924G	50.51	54.00	-3.49	6.13	3	Vertical	158	1.39	-	44.38	31.38	4.57	29.83
PK	4.924G	53.47	74.00	-20.53	6.13	3	Vertical	158	1.39	-	47.34	31.38	4.57	29.83

802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

16/11/2017

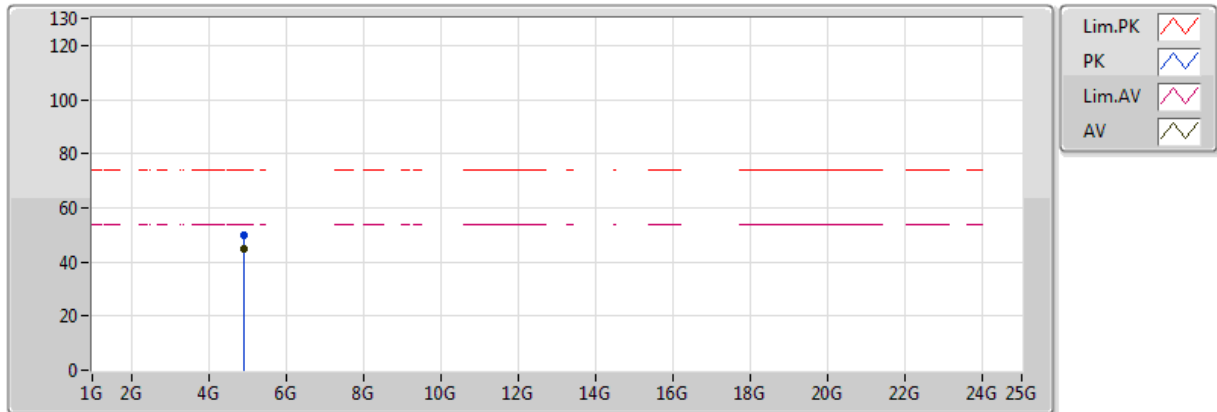


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.924G	44.89	54.00	-9.11	6.13	3	Horizontal	200	1.94	-	38.76	31.38	4.57	29.83
PK	4.924G	49.65	74.00	-24.35	6.13	3	Horizontal	200	1.94	-	43.52	31.38	4.57	29.83

802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

16/11/2017

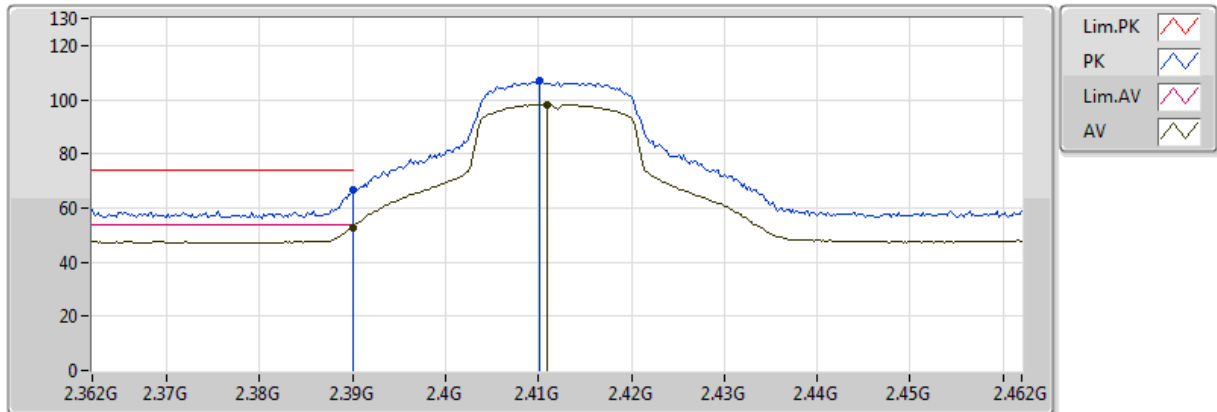


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.39G	52.89	54.00	-1.11	30.45	3	Vertical	214	1.72	-	22.44	27.21	3.24	-
AV	2.411G	98.33	Inf	-Inf	30.53	3	Vertical	214	1.72	-	67.80	27.27	3.26	-
PK	2.39G	66.60	74.00	-7.40	30.45	3	Vertical	214	1.72	-	36.14	27.21	3.24	-
PK	2.4102G	107.08	Inf	-Inf	30.53	3	Vertical	214	1.72	-	76.55	27.27	3.26	-

802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

16/11/2017

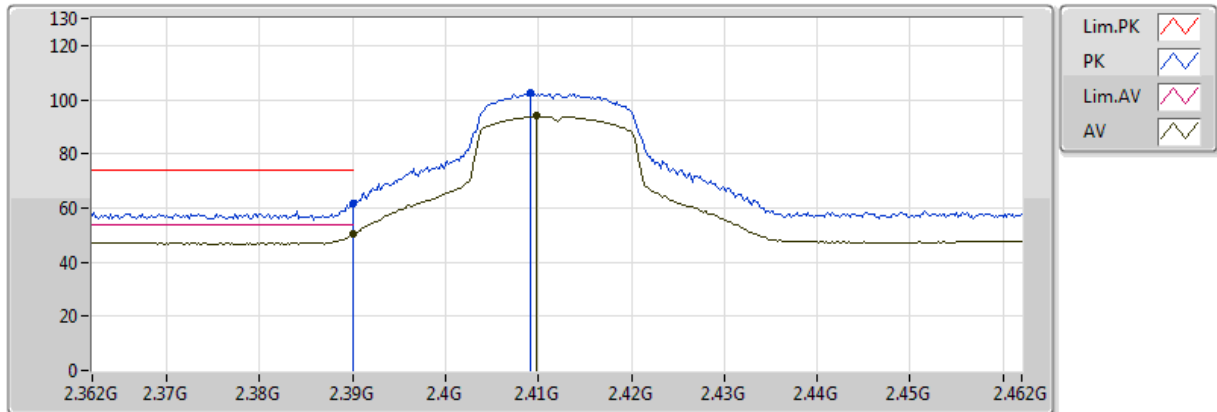


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.39G	50.43	54.00	-3.57	30.45	3	Horizontal	206	1.84	-	19.98	27.21	3.24	-
AV	2.4098G	93.88	Inf	-Inf	30.53	3	Horizontal	206	1.84	-	63.36	27.27	3.26	-
PK	2.39G	61.55	74.00	-12.45	30.45	3	Horizontal	206	1.84	-	31.09	27.21	3.24	-
PK	2.4092G	102.45	Inf	-Inf	30.52	3	Horizontal	206	1.84	-	71.92	27.26	3.26	-

802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

16/11/2017

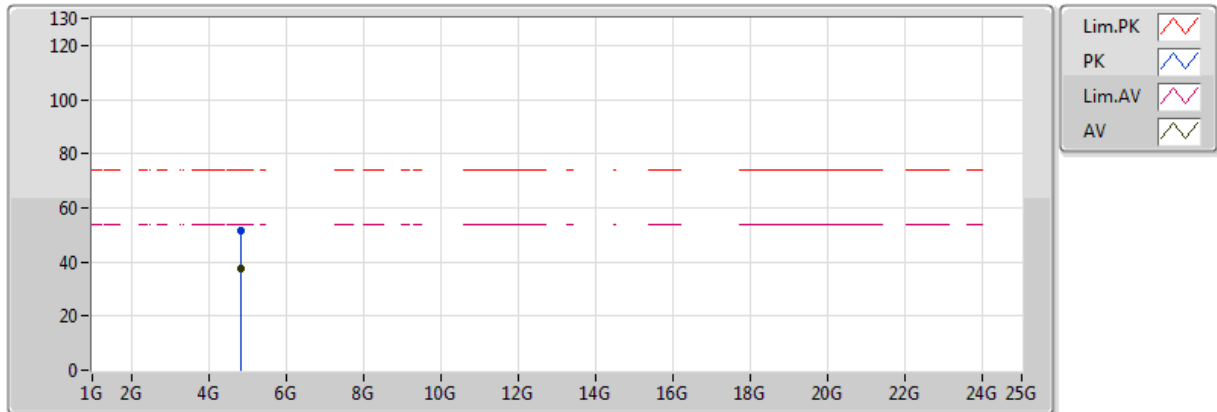


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.82622G	37.77	54.00	-16.23	2.11	3	Vertical	147	1.92	-	35.65	31.29	5.41	34.58
PK	4.81974G	51.34	74.00	-22.66	2.09	3	Vertical	147	1.92	-	49.25	31.28	5.40	34.59

802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

16/11/2017

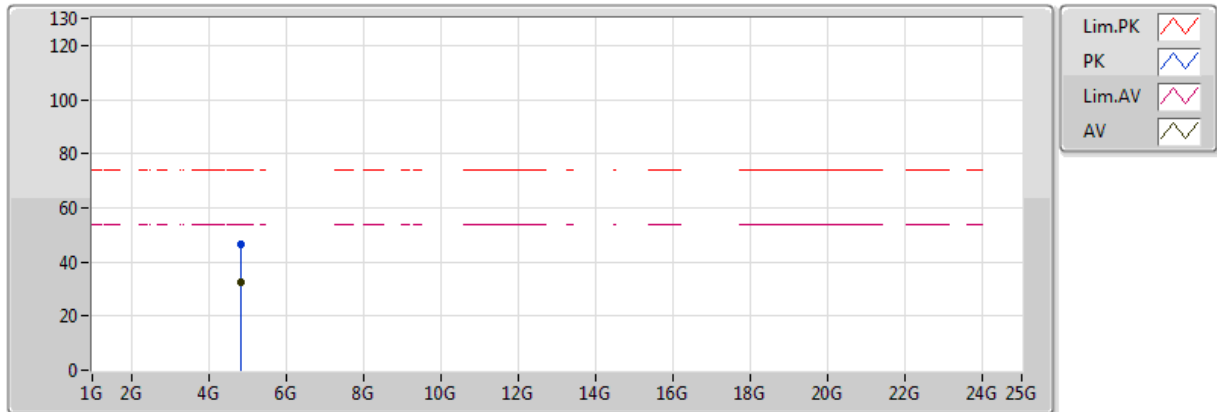


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.82388G	32.68	54.00	-21.32	2.10	3	Horizontal	176	1.50	-	30.57	31.28	5.41	34.59
PK	4.82706G	46.57	74.00	-27.43	2.11	3	Horizontal	176	1.50	-	44.45	31.29	5.41	34.58

802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX


16/11/2017

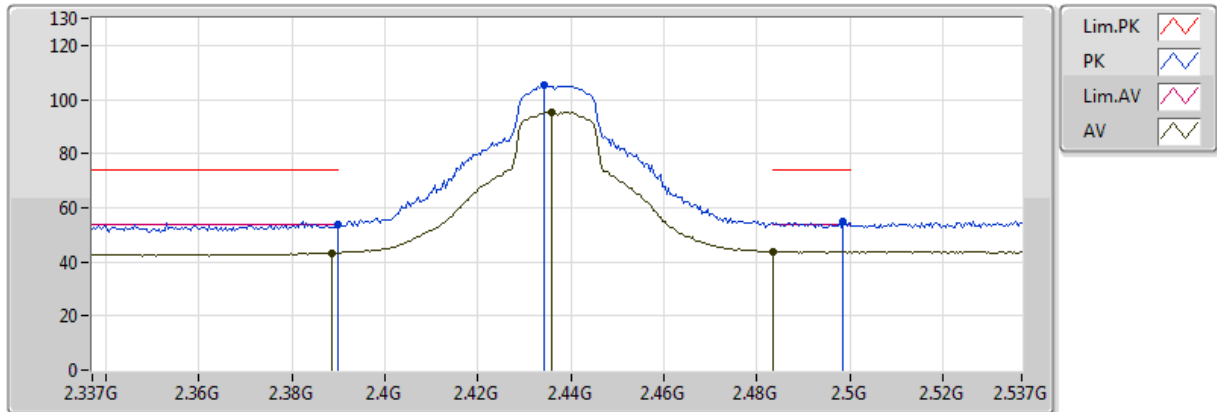

802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

16/11/2017

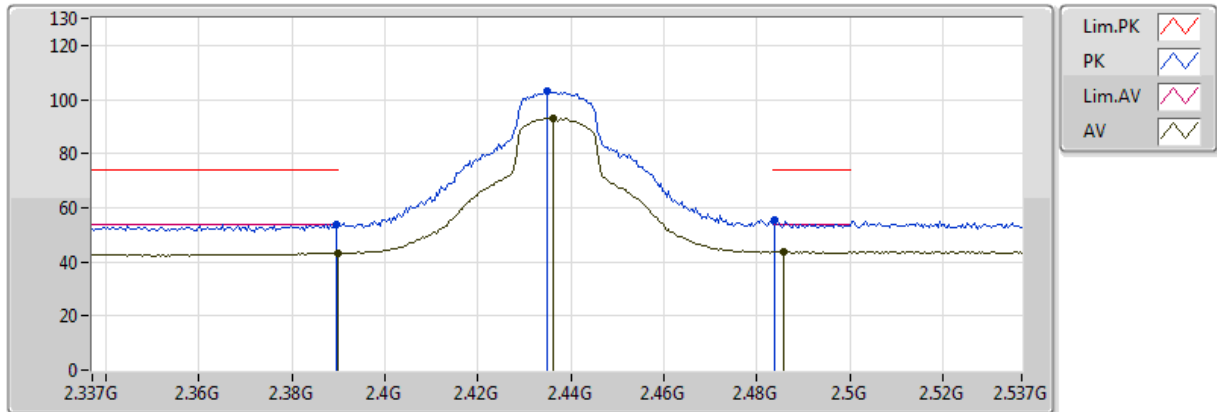


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3898G	43.27	54.00	-10.73	30.93	3	Horizontal	217	1.50	-	12.34	27.31	3.62	-
AV	2.4362G	93.13	Inf	-Inf	31.10	3	Horizontal	217	1.50	-	62.03	27.43	3.67	-
AV	2.4858G	43.66	54.00	-10.34	31.28	3	Horizontal	217	1.50	-	12.38	27.56	3.72	-
PK	2.3894G	53.73	74.00	-20.27	30.93	3	Horizontal	217	1.50	-	22.80	27.31	3.62	-
PK	2.435G	103.23	Inf	-Inf	31.10	3	Horizontal	217	1.50	-	72.13	27.43	3.67	-
PK	2.4838G	55.34	74.00	-18.66	31.27	3	Horizontal	217	1.50	-	24.07	27.56	3.71	-

802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

16/11/2017

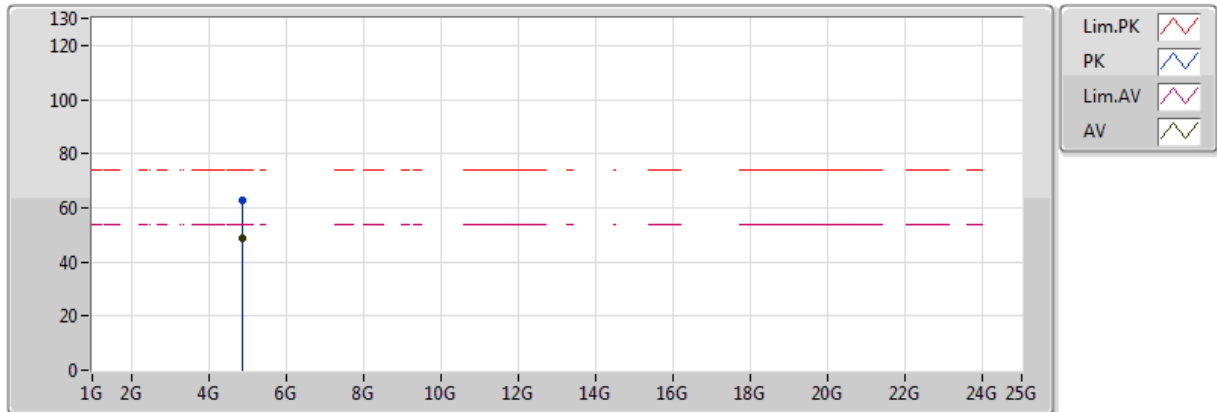


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.874G	48.87	54.00	-5.13	6.01	3	Vertical	158	1.13	-	42.86	31.30	4.55	29.84
PK	4.874G	62.84	74.00	-11.16	6.01	3	Vertical	158	1.13	-	56.83	31.30	4.55	29.84

802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

16/11/2017

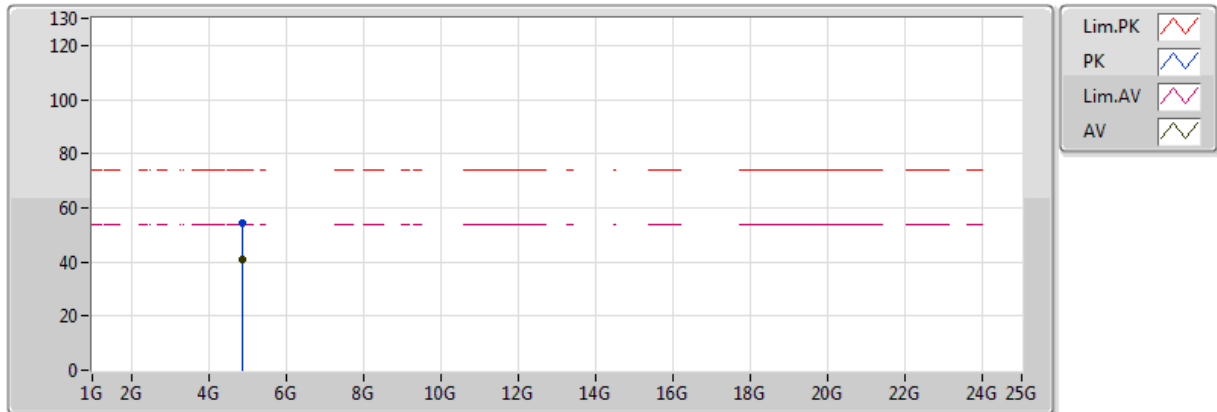


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.874G	41.16	54.00	-12.84	6.01	3	Horizontal	182	1.29	-	35.15	31.30	4.55	29.84
PK	4.874G	54.56	74.00	-19.44	6.01	3	Horizontal	182	1.29	-	48.55	31.30	4.55	29.84

802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

16/11/2017

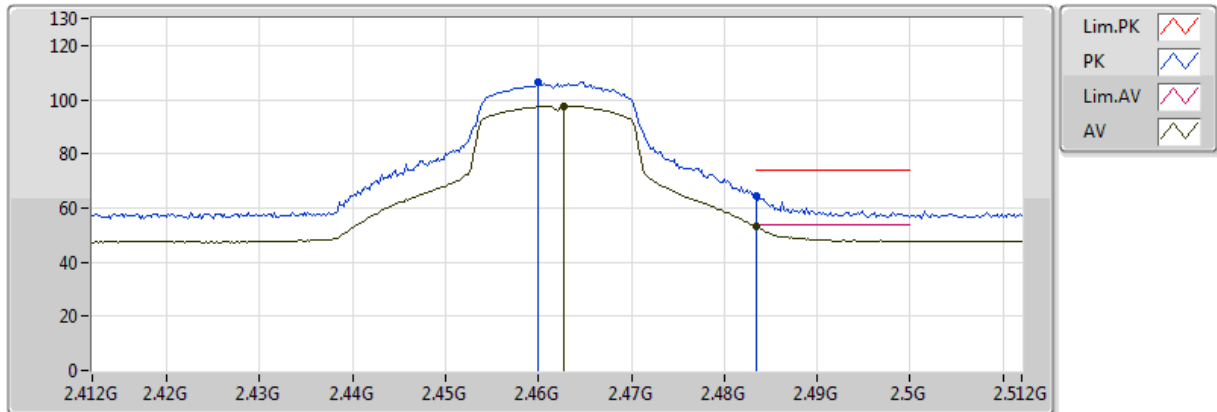


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.4628G	97.67	Inf	-Inf	30.72	3	Vertical	214	1.57	-	66.96	27.40	3.31	-
AV	2.483502G	52.98	54.00	-1.02	30.79	3	Vertical	214	1.57	-	22.19	27.46	3.33	-
PK	2.46G	106.36	Inf	-Inf	30.71	3	Vertical	214	1.57	-	75.66	27.40	3.31	-
PK	2.483502G	64.57	74.00	-9.43	30.79	3	Vertical	214	1.57	-	33.78	27.46	3.33	-

802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

16/11/2017

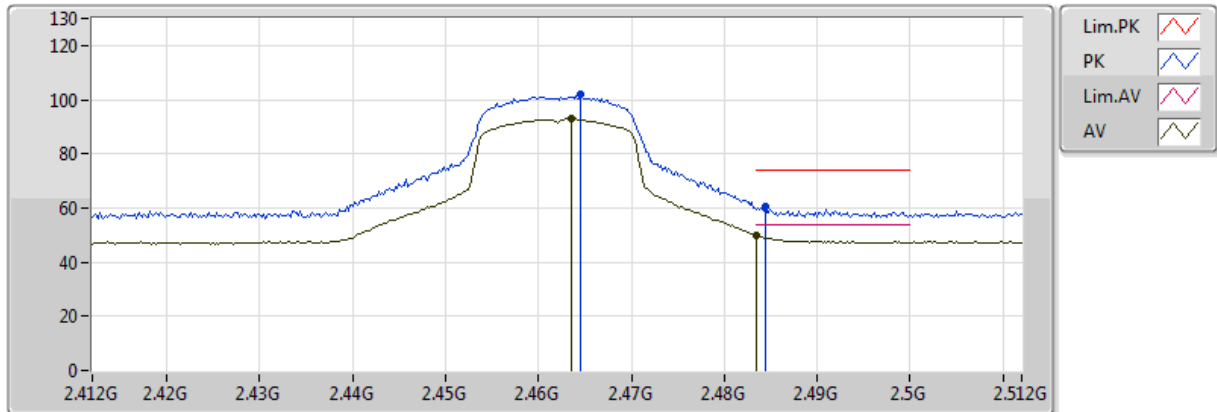


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.4636G	92.87	Inf	-Inf	30.72	3	Horizontal	204	1.95	-	62.16	27.41	3.31	-
AV	2.483502G	49.74	54.00	-4.26	30.79	3	Horizontal	204	1.95	-	18.95	27.46	3.33	-
PK	2.4646G	101.96	Inf	-Inf	30.72	3	Horizontal	204	1.95	-	71.23	27.41	3.31	-
PK	2.4844G	60.26	74.00	-13.74	30.79	3	Horizontal	204	1.95	-	29.47	27.46	3.33	-

802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

16/11/2017

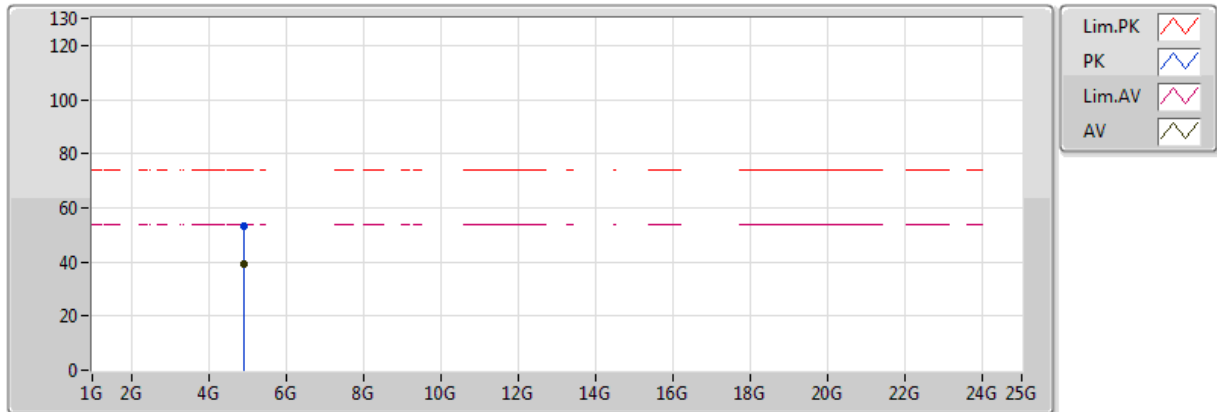


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.9243G	39.43	54.00	-14.57	2.42	3	Vertical	151	1.72	-	37.01	31.46	5.52	34.57
PK	4.9219G	53.24	74.00	-20.76	2.41	3	Vertical	151	1.72	-	50.83	31.46	5.51	34.57

802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

16/11/2017

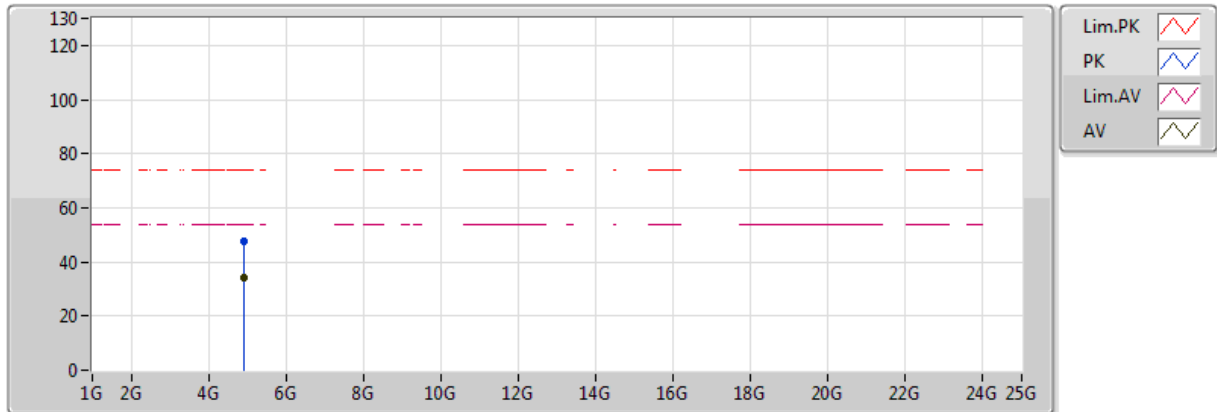


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.92406G	34.15	54.00	-19.85	2.41	3	Horizontal	353	1.48	-	31.73	31.46	5.52	34.57
PK	4.9246G	47.88	74.00	-26.12	2.42	3	Horizontal	353	1.48	-	45.46	31.46	5.52	34.57

802.11n HT20_Nss1,(MCS0)_1TX

2412MHz_TX

16/11/2017

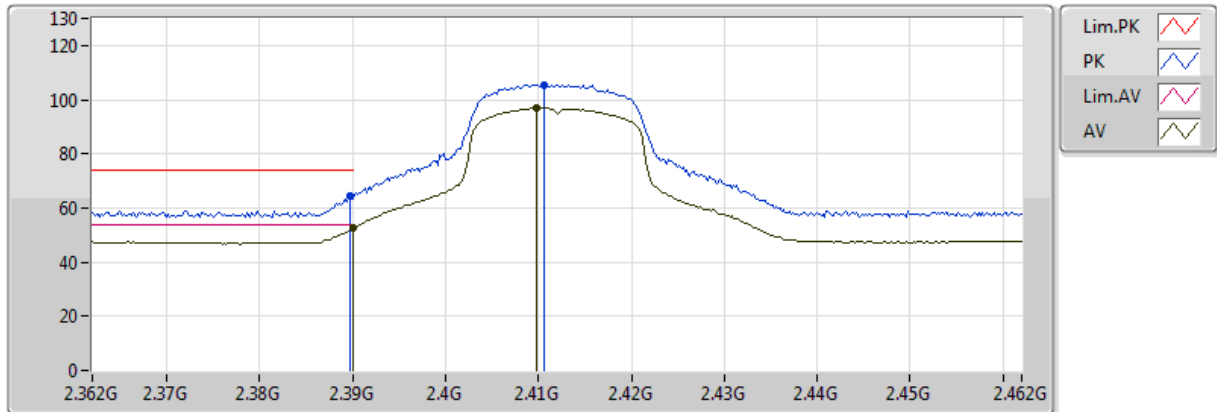


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.39G	52.48	54.00	-1.52	30.45	3	Vertical	216	1.50	-	22.02	27.21	3.24	-
AV	2.4098G	96.90	Inf	-Inf	30.53	3	Vertical	216	1.50	-	66.38	27.27	3.26	-
PK	2.3898G	64.23	74.00	-9.77	30.45	3	Vertical	216	1.50	-	33.78	27.21	3.24	-
PK	2.4106G	105.62	Inf	-Inf	30.53	3	Vertical	216	1.50	-	75.09	27.27	3.26	-

802.11n HT20_Nss1,(MCS0)_1TX

2412MHz_TX

16/11/2017

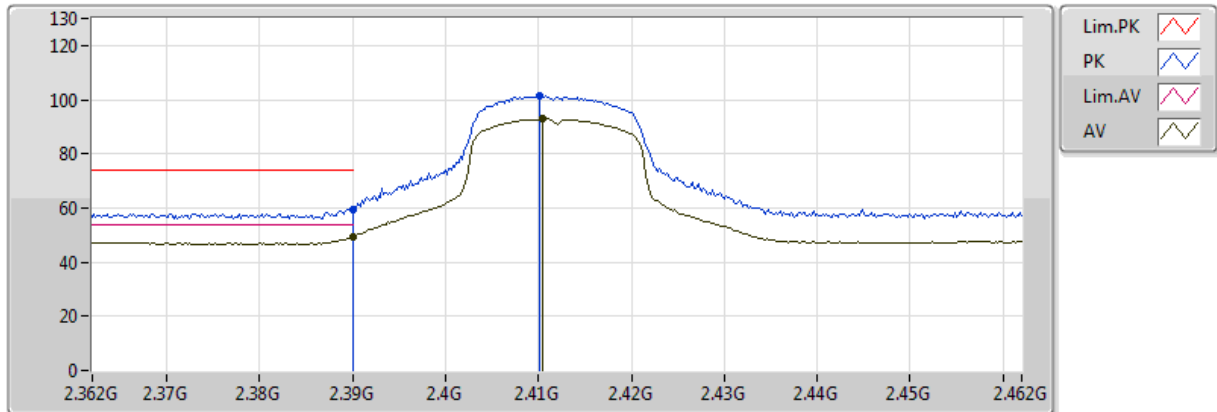


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.39G	49.30	54.00	-4.70	30.45	3	Horizontal	205	1.84	-	18.84	27.21	3.24	-
AV	2.4104G	92.81	Inf	-Inf	30.53	3	Horizontal	205	1.84	-	62.28	27.27	3.26	-
PK	2.39G	59.55	74.00	-14.45	30.45	3	Horizontal	205	1.84	-	29.09	27.21	3.24	-
PK	2.4102G	101.45	Inf	-Inf	30.53	3	Horizontal	205	1.84	-	70.92	27.27	3.26	-

802.11n HT20_Nss1,(MCS0)_1TX

2412MHz_TX

16/11/2017

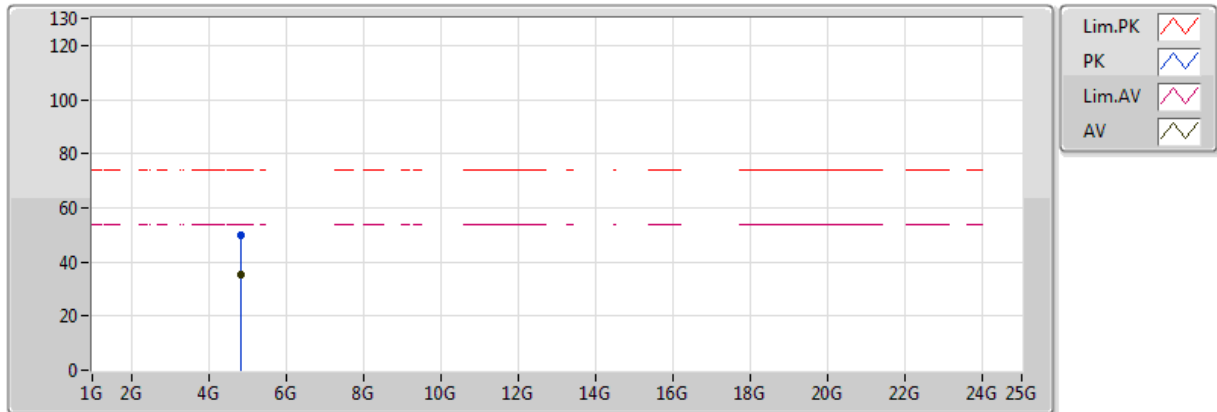


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.82646G	35.57	54.00	-18.43	2.11	3	Vertical	150	1.94	-	33.46	31.29	5.41	34.58
PK	4.82586G	49.63	74.00	-24.37	2.11	3	Vertical	150	1.94	-	47.52	31.29	5.41	34.58

802.11n HT20_Nss1,(MCS0)_1TX

2412MHz_TX

16/11/2017

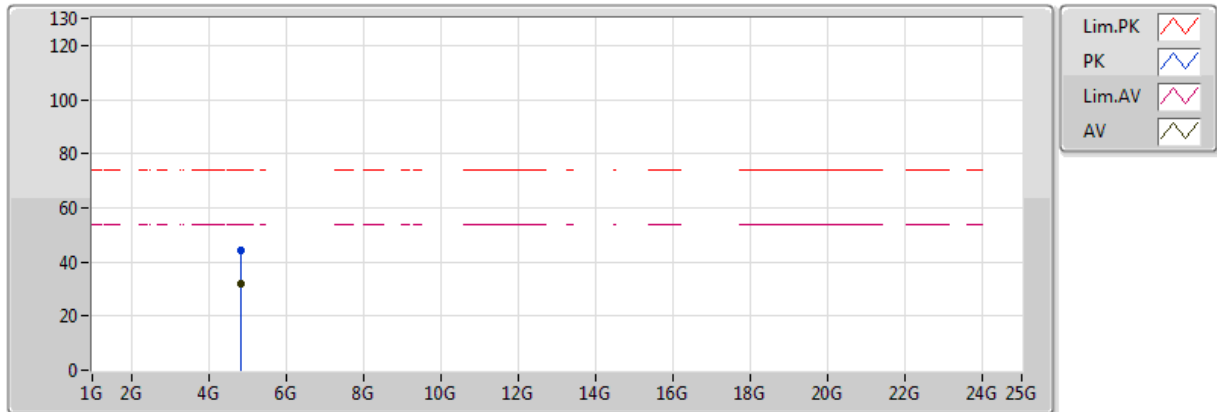


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.82364G	31.68	54.00	-22.32	2.10	3	Horizontal	177	1.50	-	29.57	31.28	5.41	34.59
PK	4.82214G	44.49	74.00	-29.51	2.10	3	Horizontal	177	1.50	-	42.39	31.28	5.40	34.59

802.11n HT20_Nss1,(MCS0)_1TX

2437MHz_TX

16/11/2017

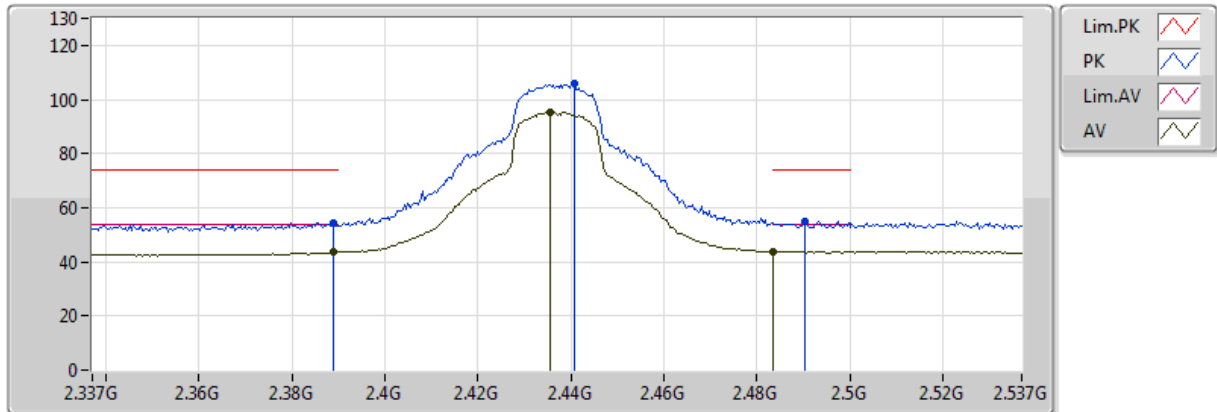


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.389G	43.56	54.00	-10.44	30.93	3	Vertical	120	1.45	-	12.63	27.31	3.62	-
AV	2.4354G	95.36	Inf	-Inf	31.10	3	Vertical	120	1.45	-	64.26	27.43	3.67	-
AV	2.483502G	43.90	54.00	-10.10	31.27	3	Vertical	120	1.45	-	12.63	27.56	3.71	-
PK	2.389G	54.16	74.00	-19.84	30.93	3	Vertical	120	1.45	-	23.23	27.31	3.62	-
PK	2.4406G	106.13	Inf	-Inf	31.12	3	Vertical	120	1.45	-	75.01	27.45	3.67	-
PK	2.4902G	54.99	74.00	-19.01	31.29	3	Vertical	120	1.45	-	23.69	27.57	3.72	-

802.11n HT20_Nss1,(MCS0)_1TX

2437MHz_TX

16/11/2017

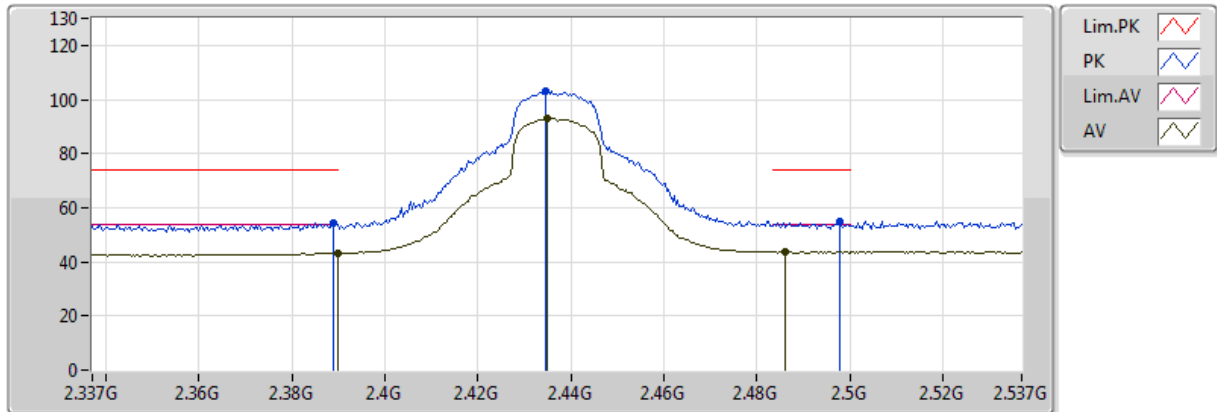


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.3898G	43.20	54.00	-10.80	30.93	3	Horizontal	217	1.51	-	12.27	27.31	3.62	-
AV	2.435G	92.96	Inf	-Inf	31.10	3	Horizontal	217	1.51	-	61.86	27.43	3.67	-
AV	2.4862G	43.67	54.00	-10.33	31.28	3	Horizontal	217	1.51	-	12.39	27.56	3.72	-
PK	2.389G	54.40	74.00	-19.60	30.93	3	Horizontal	217	1.51	-	23.47	27.31	3.62	-
PK	2.4346G	103.03	Inf	-Inf	31.09	3	Horizontal	217	1.51	-	71.93	27.43	3.66	-
PK	2.4978G	54.98	74.00	-19.02	31.32	3	Horizontal	217	1.51	-	23.66	27.59	3.73	-

802.11n HT20_Nss1,(MCS0)_1TX

2437MHz_TX

16/11/2017

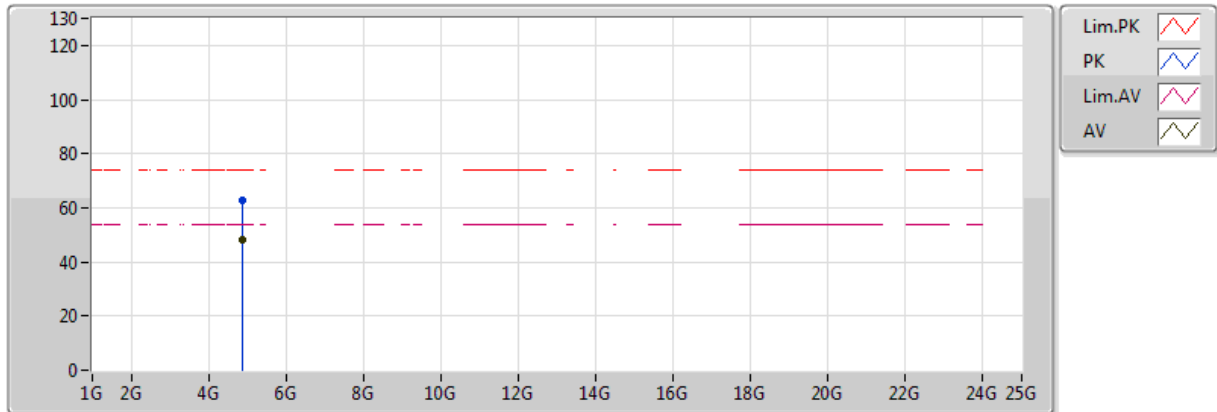


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.874G	48.43	54.00	-5.57	6.01	3	Vertical	155	1.08	-	42.42	31.30	4.55	29.84
PK	4.874G	62.62	74.00	-11.38	6.01	3	Vertical	155	1.08	-	56.61	31.30	4.55	29.84

802.11n HT20_Nss1,(MCS0)_1TX

2437MHz_TX

16/11/2017

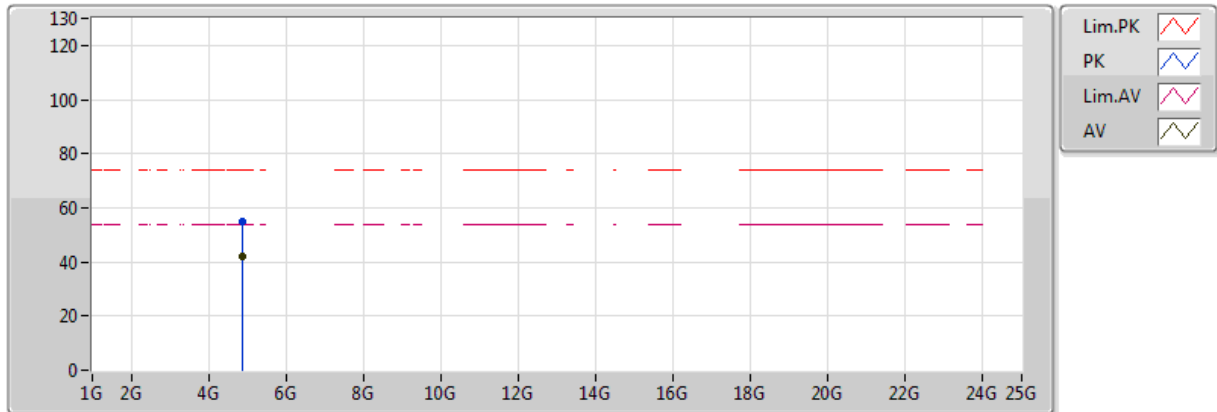


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.874G	41.89	54.00	-12.11	6.01	3	Horizontal	183	1.27	-	35.88	31.30	4.55	29.84
PK	4.874G	54.99	74.00	-19.01	6.01	3	Horizontal	183	1.27	-	48.98	31.30	4.55	29.84

802.11n HT20_Nss1,(MCS0)_1TX

2462MHz_TX

16/11/2017

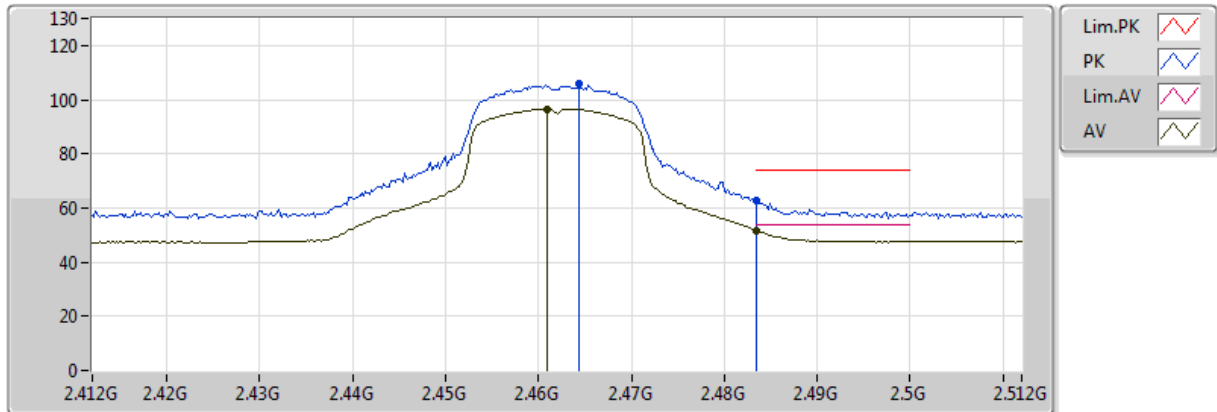


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.461G	96.47	Inf	-Inf	30.71	3	Vertical	214	1.59	-	65.76	27.40	3.31	-
AV	2.483502G	51.60	54.00	-2.40	30.79	3	Vertical	214	1.59	-	20.81	27.46	3.33	-
PK	2.4644G	105.65	Inf	-Inf	30.72	3	Vertical	214	1.59	-	74.92	27.41	3.31	-
PK	2.483502G	62.88	74.00	-11.12	30.79	3	Vertical	214	1.59	-	32.08	27.46	3.33	-

802.11n HT20_Nss1,(MCS0)_1TX

2462MHz_TX

16/11/2017

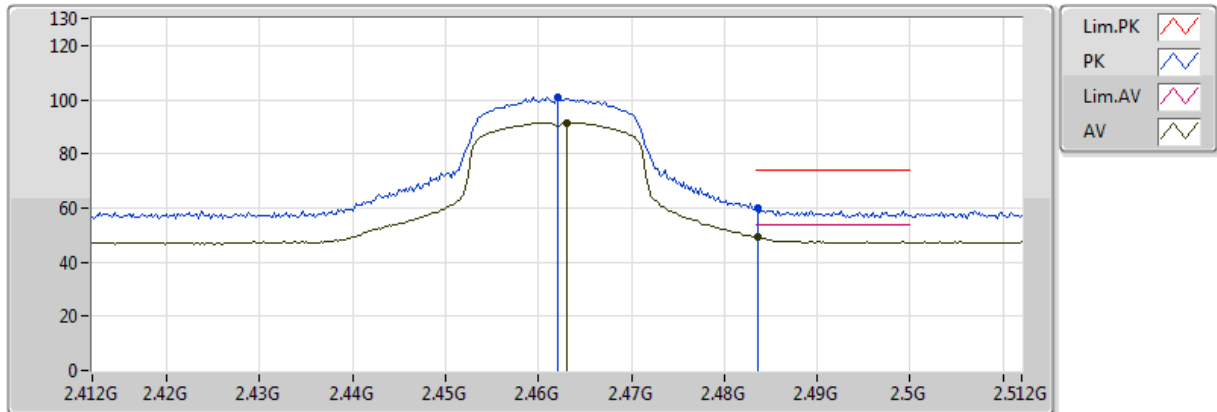


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.463G	91.61	Inf	-Inf	30.72	3	Horizontal	203	1.97	-	60.89	27.40	3.31	-
AV	2.4836G	49.32	54.00	-4.68	30.79	3	Horizontal	203	1.97	-	18.53	27.46	3.33	-
PK	2.462G	100.61	Inf	-Inf	30.71	3	Horizontal	203	1.97	-	69.90	27.40	3.31	-
PK	2.4836G	59.90	74.00	-14.10	30.79	3	Horizontal	203	1.97	-	29.11	27.46	3.33	-

802.11n HT20_Nss1,(MCS0)_1TX

2462MHz_TX

16/11/2017

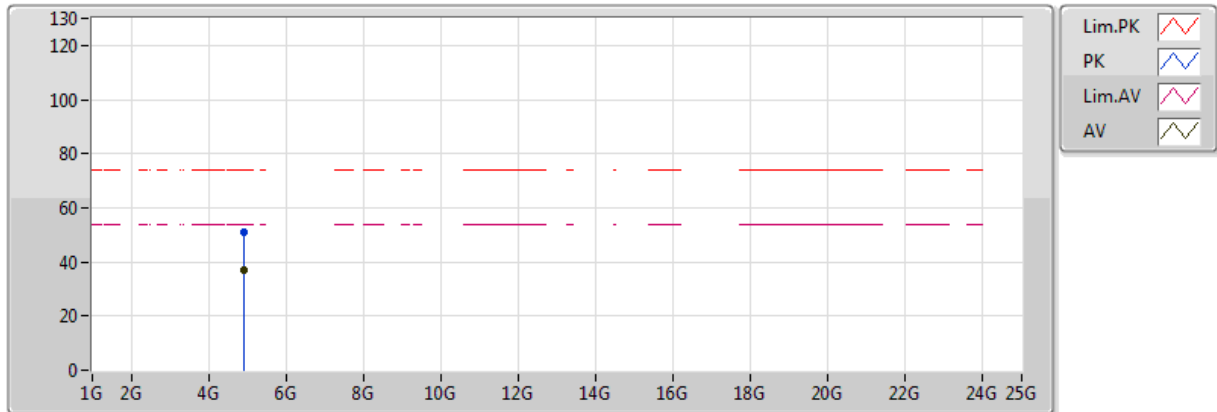


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.92508G	36.85	54.00	-17.15	2.42	3	Vertical	169	1.73	-	34.43	31.47	5.52	34.56
PK	4.92526G	51.24	74.00	-22.76	2.42	3	Vertical	169	1.73	-	48.82	31.47	5.52	34.56

802.11n HT20_Nss1,(MCS0)_1TX

2462MHz_TX

16/11/2017

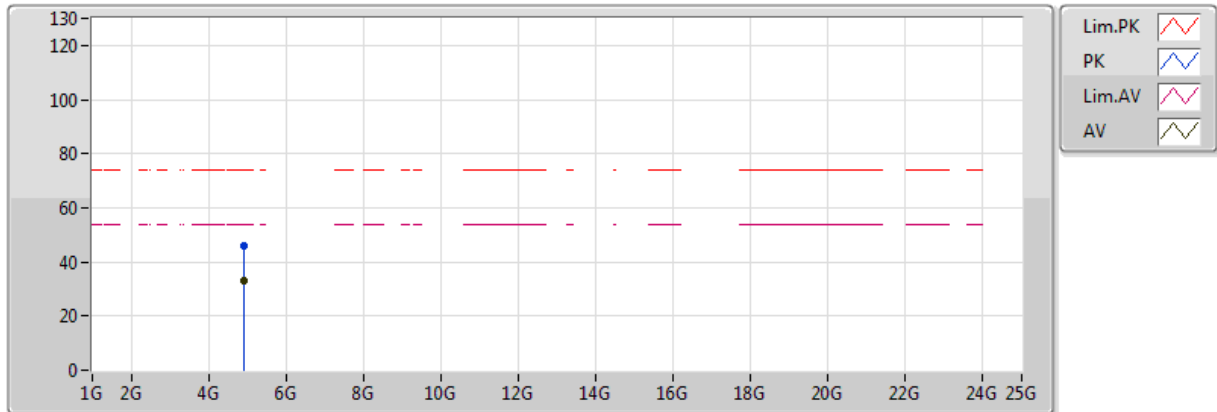


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.9267G	33.01	54.00	-20.99	2.42	3	Horizontal	351	1.72	-	30.59	31.47	5.52	34.56
PK	4.9183G	46.07	74.00	-27.93	2.40	3	Horizontal	351	1.72	-	43.67	31.45	5.51	34.57

802.11n HT40_Nss1,(MCS0)_1TX

2422MHz_TX

16/11/2017

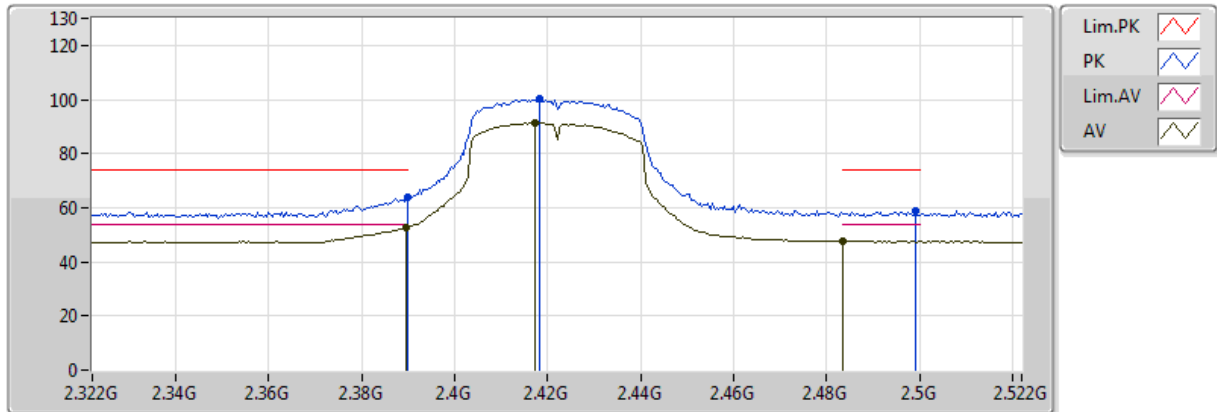


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3896G	52.75	54.00	-1.25	30.45	3	Vertical	217	1.23	-	22.30	27.21	3.24	-
AV	2.4172G	91.28	Inf	-Inf	30.55	3	Vertical	217	1.23	-	60.73	27.28	3.27	-
AV	2.4836G	47.65	54.00	-6.35	30.79	3	Vertical	217	1.23	-	16.86	27.46	3.33	-
PK	2.39G	64.03	74.00	-9.97	30.45	3	Vertical	217	1.23	-	33.58	27.21	3.24	-
PK	2.4184G	100.29	Inf	-Inf	30.56	3	Vertical	217	1.23	-	69.74	27.29	3.27	-
PK	2.4992G	58.93	74.00	-15.07	30.85	3	Vertical	217	1.23	-	28.09	27.50	3.35	-

802.11n HT40_Nss1,(MCS0)_1TX

2422MHz_TX


16/11/2017

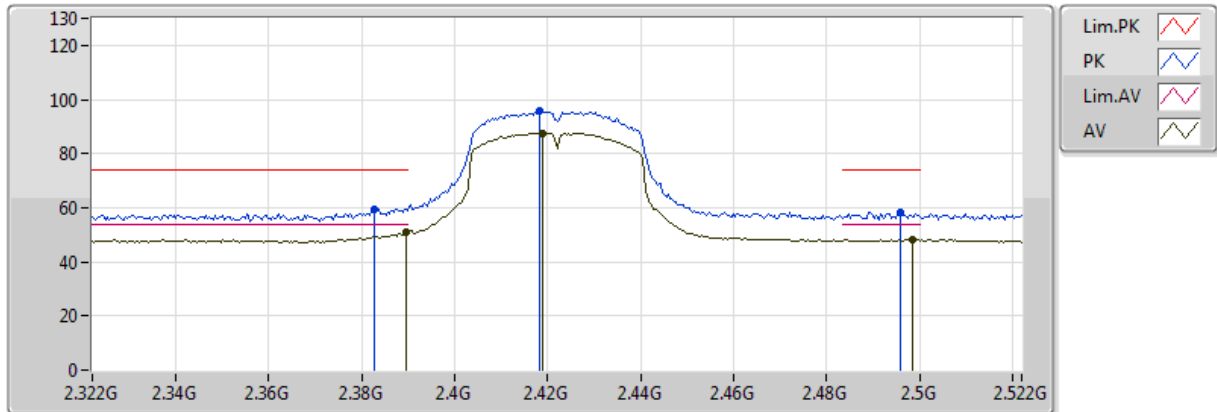

802.11n HT40_Nss1,(MCS0)_1TX

2422MHz_TX

16/11/2017

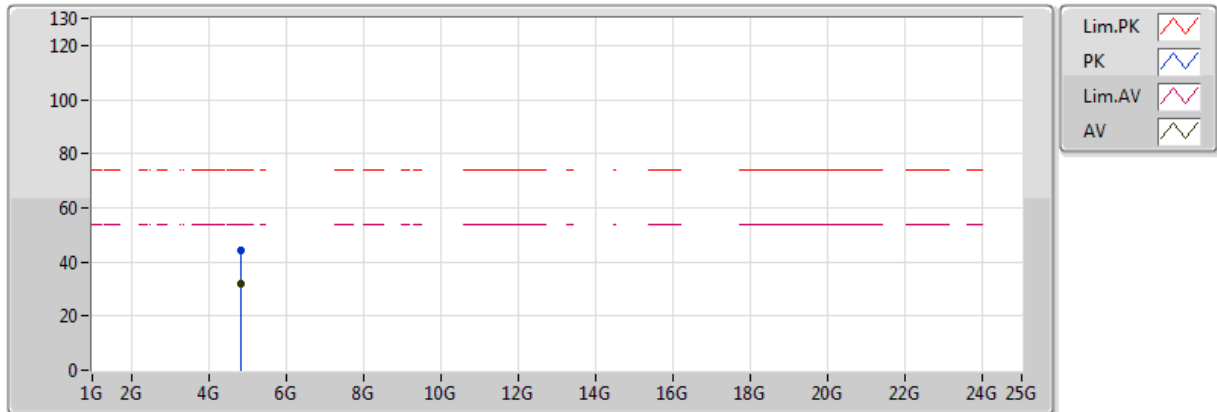


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.83818G	31.77	54.00	-22.23	2.15	3	Vertical	160	1.05	-	29.62	31.31	5.42	34.58
PK	4.83578G	44.16	74.00	-29.84	2.14	3	Vertical	160	1.05	-	42.02	31.30	5.42	34.58

802.11n HT40_Nss1,(MCS0)_1TX

2422MHz_TX

16/11/2017

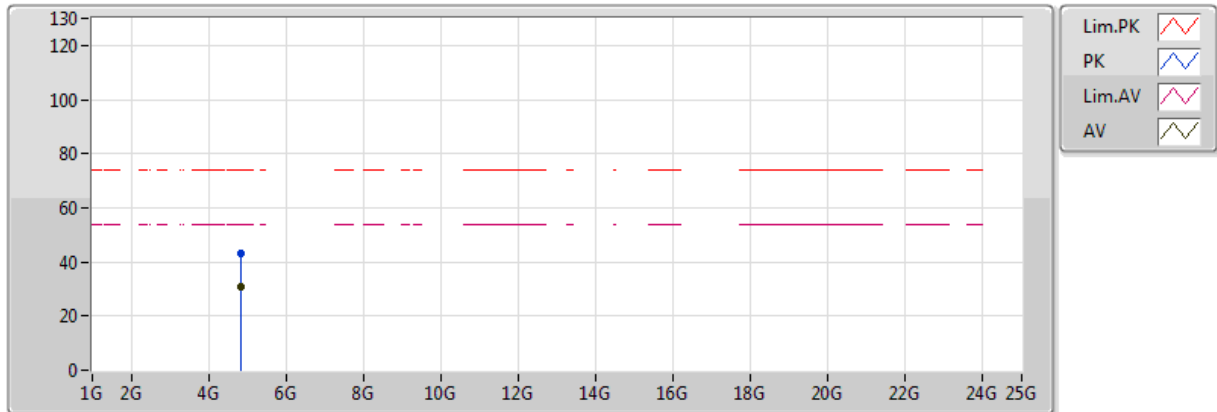


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.83482G	30.83	54.00	-23.17	2.14	3	Horizontal	79	1.50	-	28.70	31.30	5.42	34.58
PK	4.83314G	43.22	74.00	-30.78	2.13	3	Horizontal	79	1.50	-	41.09	31.30	5.42	34.58

802.11n HT40_Nss1,(MCS0)_1TX

2437MHz_TX

16/11/2017

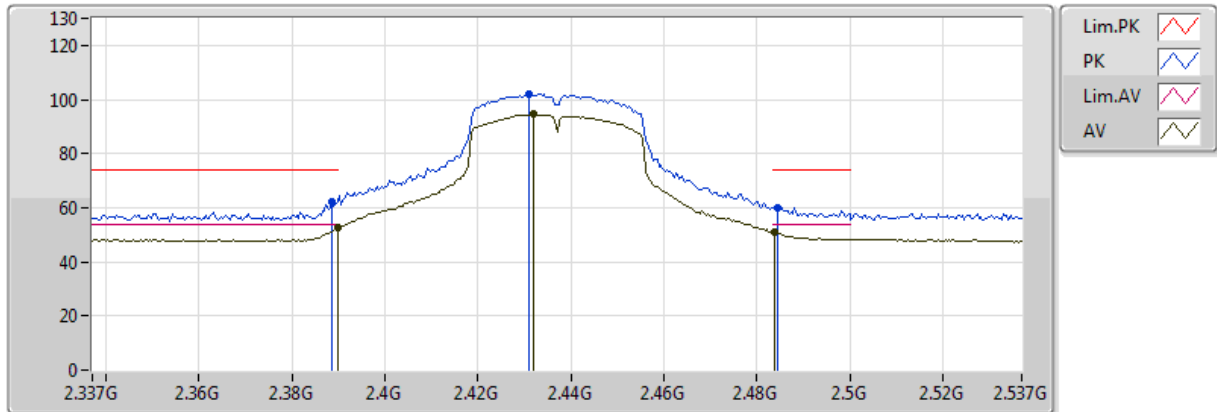


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.389998G	52.79	54.00	-1.21	30.45	3	Vertical	216	1.48	-	22.34	27.21	3.24	-
AV	2.4318G	94.48	Inf	-Inf	30.60	3	Vertical	216	1.48	-	63.88	27.32	3.28	-
AV	2.4838G	51.08	54.00	-2.92	30.79	3	Vertical	216	1.48	-	20.28	27.46	3.33	-
PK	2.3886G	62.05	74.00	-11.95	30.45	3	Vertical	216	1.48	-	31.60	27.21	3.24	-
PK	2.431G	102.16	Inf	-Inf	30.60	3	Vertical	216	1.48	-	71.56	27.32	3.28	-
PK	2.4846G	60.20	74.00	-13.80	30.79	3	Vertical	216	1.48	-	29.41	27.46	3.33	-

802.11n HT40_Nss1,(MCS0)_1TX

2437MHz_TX

16/11/2017

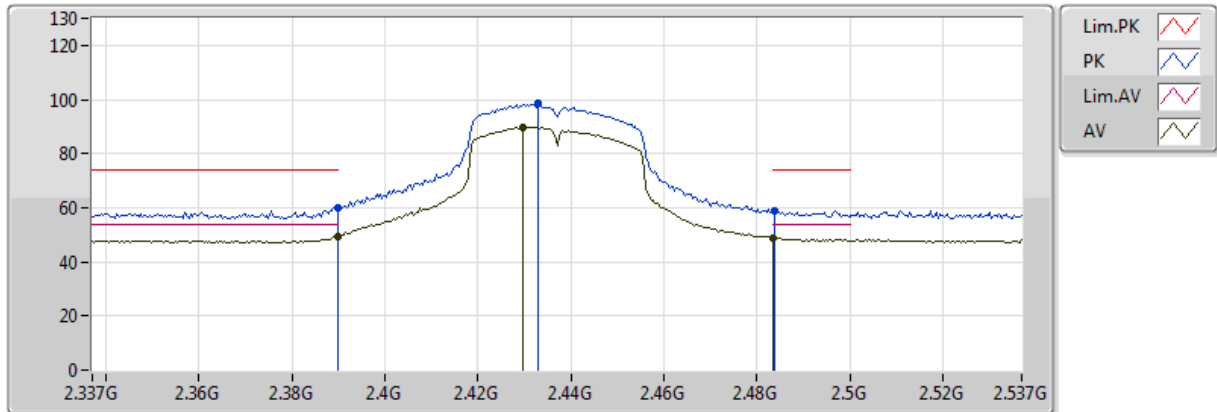


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.389998G	49.49	54.00	-4.51	30.45	3	Horizontal	204	1.81	-	19.04	27.21	3.24	-
AV	2.4298G	89.59	Inf	-Inf	30.60	3	Horizontal	204	1.81	-	58.99	27.32	3.28	-
AV	2.483502G	48.87	54.00	-5.13	30.79	3	Horizontal	204	1.81	-	18.08	27.46	3.33	-
PK	2.389998G	60.07	74.00	-13.93	30.45	3	Horizontal	204	1.81	-	29.62	27.21	3.24	-
PK	2.433G	98.45	Inf	-Inf	30.61	3	Horizontal	204	1.81	-	67.84	27.33	3.28	-
PK	2.4838G	58.93	74.00	-15.07	30.79	3	Horizontal	204	1.81	-	28.14	27.46	3.33	-

802.11n HT40_Nss1,(MCS0)_1TX

2437MHz_TX

16/11/2017

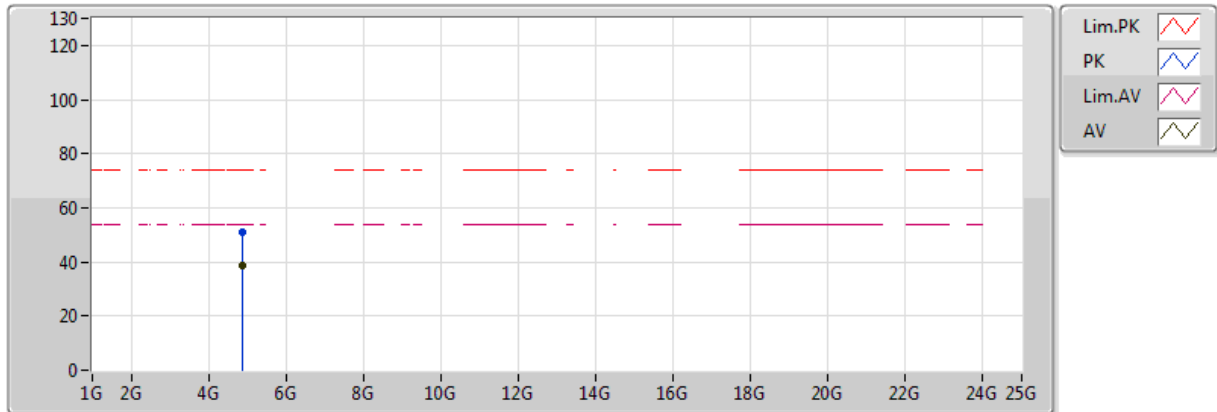


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.874G	38.51	54.00	-15.49	6.01	3	Vertical	335	1.92	-	32.50	31.30	4.55	29.84
PK	4.874G	50.93	74.00	-23.07	6.01	3	Vertical	335	1.92	-	44.92	31.30	4.55	29.84

802.11n HT40_Nss1,(MCS0)_1TX

2437MHz_TX

16/11/2017

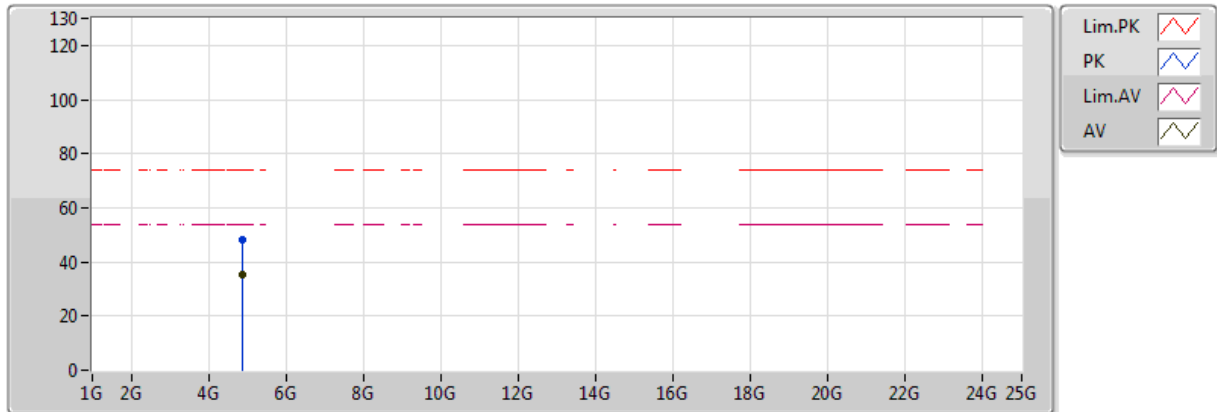


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.874G	35.32	54.00	-18.68	6.01	3	Horizontal	256	1.50	-	29.31	31.30	4.55	29.84
PK	4.874G	48.17	74.00	-25.83	6.01	3	Horizontal	256	1.50	-	42.16	31.30	4.55	29.84

802.11n HT40_Nss1,(MCS0)_1TX

2452MHz_TX

16/11/2017

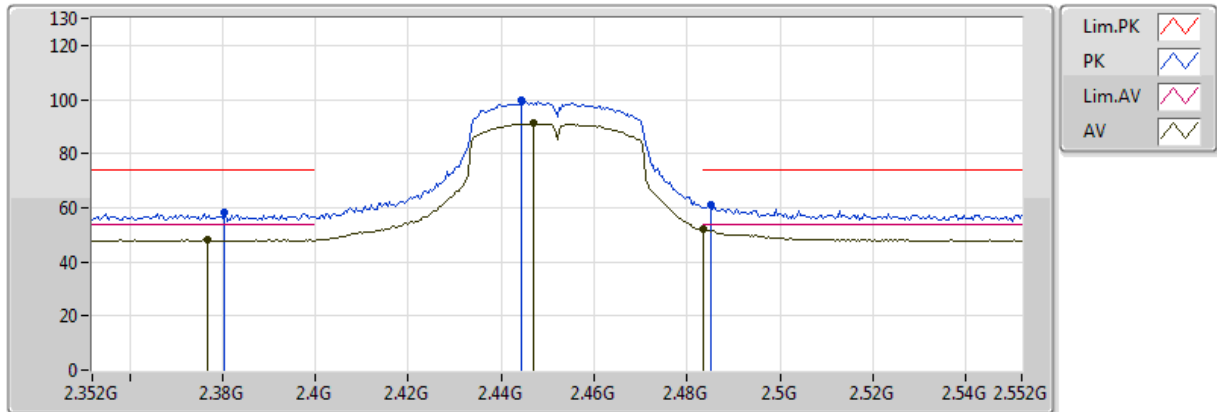


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	2.3768G	48.23	54.00	-5.77	30.41	3	Vertical	214	1.67	-	17.82	27.18	3.23	-
AV	2.4468G	91.11	Inf	-Inf	30.66	3	Vertical	214	1.67	-	60.45	27.36	3.30	-
AV	2.4836G	52.24	54.00	-1.76	30.79	3	Vertical	214	1.67	-	21.44	27.46	3.33	-
PK	2.3804G	58.14	74.00	-15.86	30.42	3	Vertical	214	1.67	-	27.72	27.19	3.23	-
PK	2.4444G	99.65	Inf	-Inf	30.65	3	Vertical	214	1.67	-	69.00	27.36	3.29	-
PK	2.4852G	61.20	74.00	-12.80	30.80	3	Vertical	214	1.67	-	30.40	27.46	3.34	-

802.11n HT40_Nss1,(MCS0)_1TX

2452MHz_TX


16/11/2017

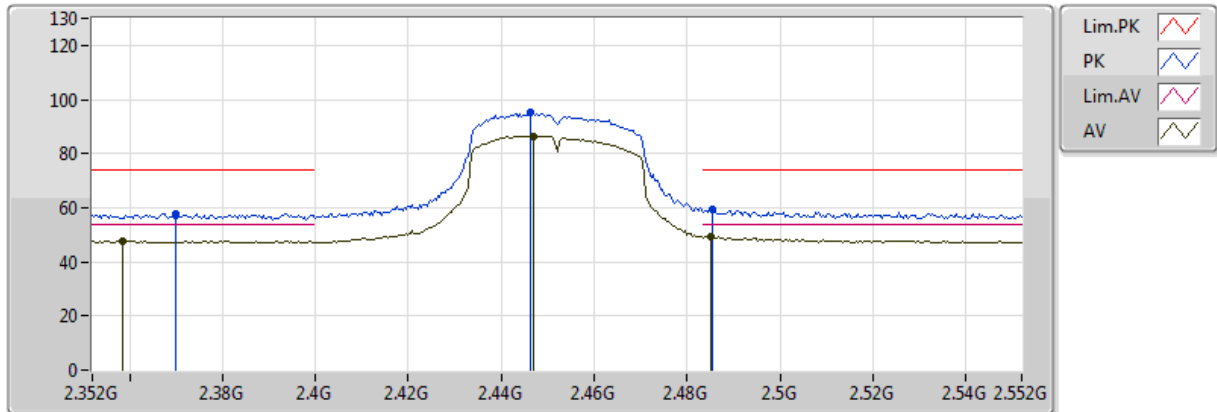

802.11n HT40_Nss1,(MCS0)_1TX

2452MHz_TX

16/11/2017

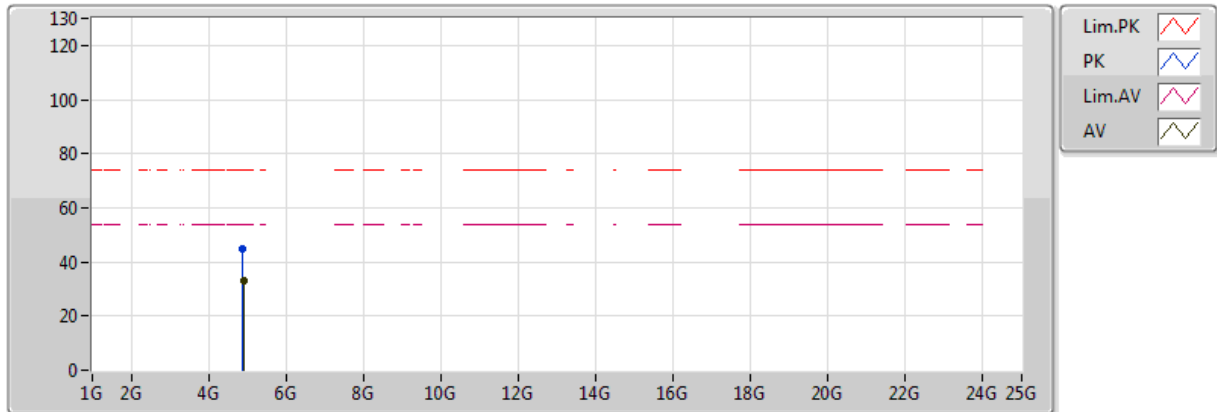


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.90178G	33.32	54.00	-20.68	2.35	3	Vertical	164	1.92	-	30.98	31.42	5.49	34.57
PK	4.89542G	44.95	74.00	-29.05	2.33	3	Vertical	164	1.92	-	42.62	31.41	5.48	34.57

802.11n HT40_Nss1,(MCS0)_1TX

2452MHz_TX

16/11/2017

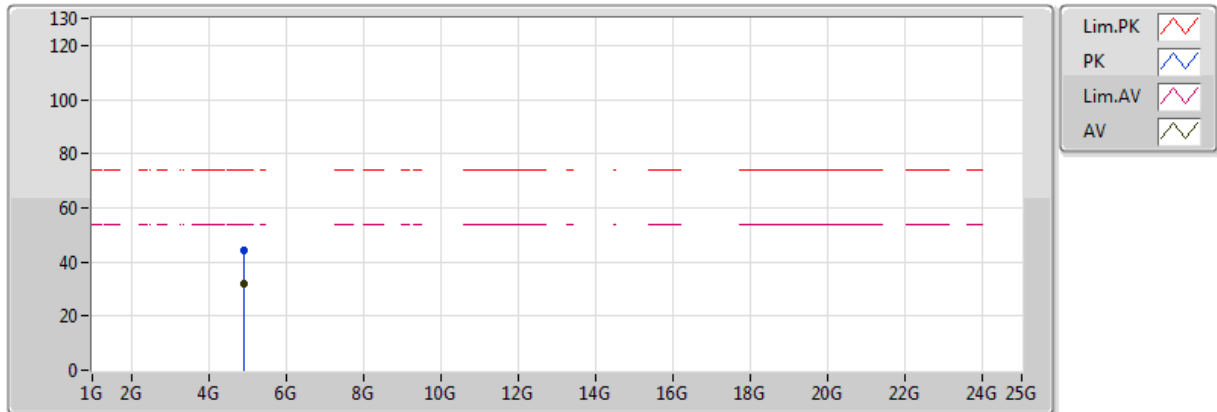

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	4.90916G	31.87	54.00	-22.13	2.37	3	Horizontal	360	2.09	-	29.50	31.44	5.50	34.57
PK	4.91072G	44.17	74.00	-29.83	2.37	3	Horizontal	360	2.09	-	41.79	31.44	5.50	34.57

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11n HT40_Nss1,(MCS0)_1TX	Pass	PK	245.35M	39.87	46.00	-6.13	-18.13	3	Vertical	360	1.00	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2437MHz	Pass	PK	67.9M	29.52	40.00	-10.48	-25.17	3	Vertical	360	1.00	-
2437MHz	Pass	PK	106.9M	31.44	43.50	-12.06	-20.27	3	Vertical	360	1.00	-
2437MHz	Pass	PK	177.1M	27.33	43.50	-16.17	-21.07	3	Vertical	360	1.00	-
2437MHz	Pass	PK	245.35M	39.87	46.00	-6.13	-18.13	3	Vertical	360	1.00	-
2437MHz	Pass	PK	286.3M	35.02	46.00	-10.98	-17.03	3	Vertical	360	1.00	-
2437MHz	Pass	PK	352.6M	34.48	46.00	-11.52	-15.47	3	Vertical	360	1.00	-
2437MHz	Pass	PK	57.16M	33.81	40.00	-6.19	-25.32	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	105.66M	31.42	43.50	-12.08	-20.41	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	105.66M	31.42	43.50	-12.08	-20.41	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	268.62M	36.96	46.00	-9.04	-16.68	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	291.9M	33.37	46.00	-12.63	-16.88	3	Horizontal	0	1.00	-
2437MHz	Pass	PK	563.5M	29.96	46.00	-16.04	-9.87	3	Horizontal	0	1.00	-

802.11n HT40_Nss1,(MCS0)_1RX

16/03/2020

2437MHz_Adapter

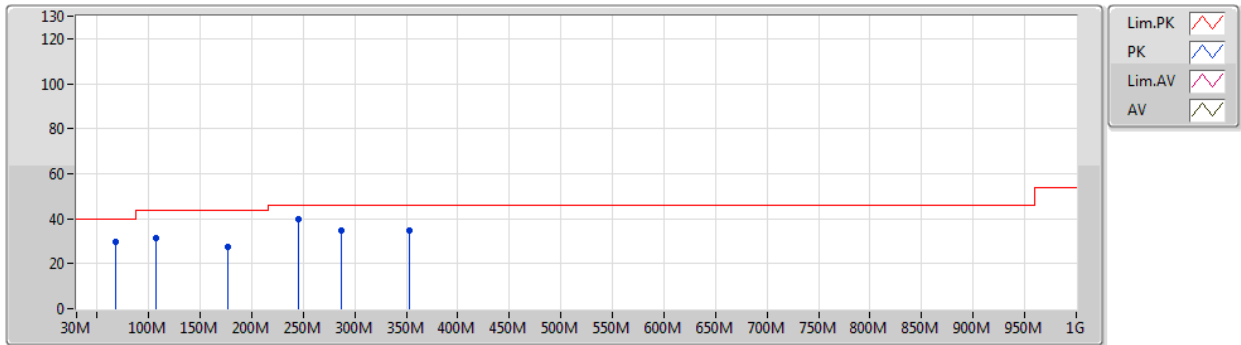


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	67.9M	29.52	40.00	-10.48	-25.17	3	Vertical	360	1.00	-	54.69	11.19	0.66	37.02
PK	106.9M	31.44	43.50	-12.06	-20.27	3	Vertical	360	1.00	-	51.71	15.64	0.84	36.75
PK	177.1M	27.33	43.50	-16.17	-21.07	3	Vertical	360	1.00	-	48.40	14.27	1.11	36.45
PK	245.35M	39.87	46.00	-6.13	-18.13	3	Vertical	360	1.00	-	58.00	17.01	1.28	36.42
PK	286.3M	35.02	46.00	-10.98	-17.03	3	Vertical	360	1.00	-	52.05	18.04	1.40	36.47
PK	352.6M	34.48	46.00	-11.52	-15.47	3	Vertical	360	1.00	-	49.95	19.50	1.59	36.56

802.11n HT40_Nss1,(MCS0)_1RX

16/03/2020

2437MHz_Adapter

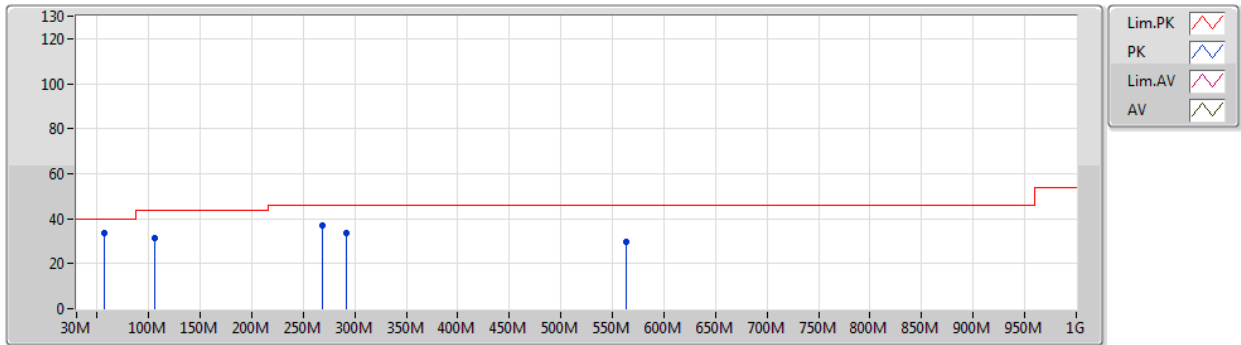

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	57.16M	33.81	40.00	-6.19	-25.32	3	Horizontal	0	1.00	-	59.13	11.18	0.61	37.11
PK	105.66M	31.42	43.50	-12.08	-20.41	3	Horizontal	0	1.00	-	51.83	15.52	0.83	36.76
PK	105.66M	31.42	43.50	-12.08	-20.41	3	Horizontal	0	1.00	-	51.83	15.52	0.83	36.76
PK	268.62M	36.96	46.00	-9.04	-16.68	3	Horizontal	0	1.00	-	53.64	18.41	1.35	36.44
PK	291.9M	33.37	46.00	-12.63	-16.88	3	Horizontal	0	1.00	-	50.25	18.17	1.42	36.47
PK	563.5M	29.96	46.00	-16.04	-9.87	3	Horizontal	0	1.00	-	39.83	25.20	2.04	37.11



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11n HT40_Nss1,(MCS0)_1TX	Pass	AV	4.8094G	33.22	54.00	-20.78	3.73	3	Vertical	0	1.00	-


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2437MHz	Pass	AV	1.6134G	26.66	54.00	-27.34	-4.44	3	Vertical	0	1.00	-
2437MHz	Pass	AV	3.44512G	30.42	54.00	-23.58	0.33	3	Vertical	0	1.00	-
2437MHz	Pass	AV	4.8094G	33.22	54.00	-20.78	3.73	3	Vertical	0	1.00	-
2437MHz	Pass	PK	1.611G	52.87	74.00	-21.13	-4.46	3	Vertical	0	1.00	-
2437MHz	Pass	PK	3.444G	44.04	74.00	-29.96	0.33	3	Vertical	0	1.00	-
2437MHz	Pass	PK	4.807G	45.55	74.00	-28.45	3.73	3	Vertical	0	1.00	-
2437MHz	Pass	AV	1.53236G	26.78	54.00	-27.22	-4.67	3	Horizontal	360	1.00	-
2437MHz	Pass	AV	3.6419G	30.08	54.00	-23.92	0.69	3	Horizontal	360	1.00	-
2437MHz	Pass	AV	4.9842G	33.16	54.00	-20.84	4.21	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	1.528G	41.35	74.00	-32.65	-4.70	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	3.64G	43.09	74.00	-30.91	0.68	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	4.984G	46.36	74.00	-27.64	4.21	3	Horizontal	360	1.00	-

802.11n HT40_Nss1,(MCS0)_1RX

16/03/2020

2437MHz_RX

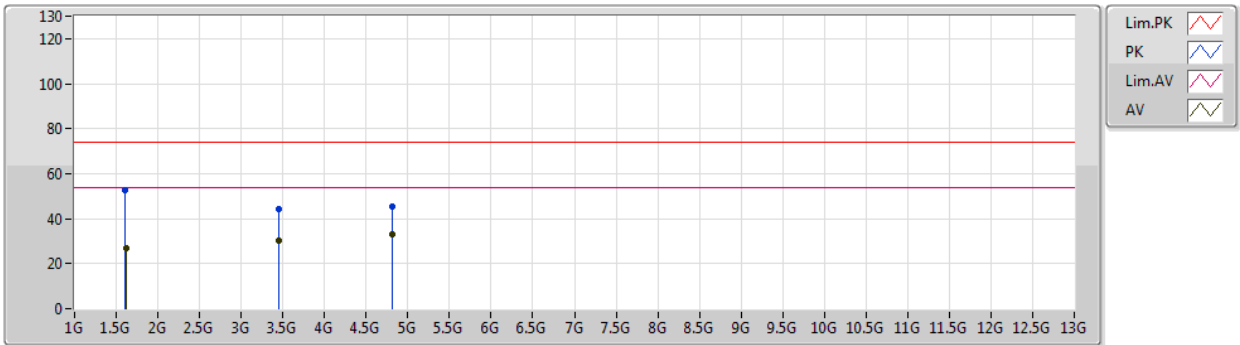


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	1.6134G	26.66	54.00	-27.34	-4.44	3	Vertical	0	1.00	-	31.10	25.74	3.78	33.96
AV	3.44512G	30.42	54.00	-23.58	0.33	3	Vertical	0	1.00	-	30.09	28.63	5.73	34.03
AV	4.8094G	33.22	54.00	-20.78	3.73	3	Vertical	0	1.00	-	29.49	31.13	6.65	34.05
PK	1.611G	52.87	74.00	-21.13	-4.46	3	Vertical	0	1.00	-	57.33	25.73	3.77	33.96
PK	3.444G	44.04	74.00	-29.96	0.33	3	Vertical	0	1.00	-	43.71	28.63	5.73	34.03
PK	4.807G	45.55	74.00	-28.45	3.73	3	Vertical	0	1.00	-	41.82	31.13	6.65	34.05

802.11n HT40_Nss1,(MCS0)_1RX

16/03/2020

2437MHz_RX

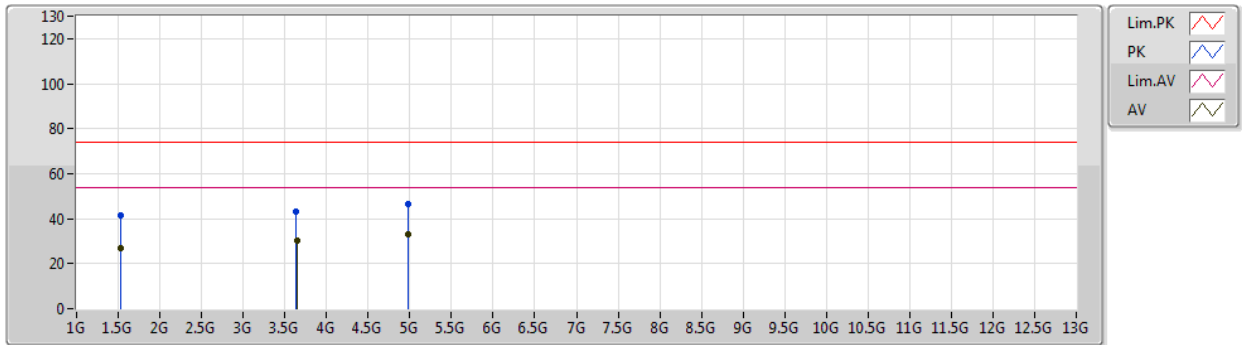

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	1.53236G	26.78	54.00	-27.22	-4.67	3	Horizontal	360	1.00	-	31.45	25.64	3.69	34.00
AV	3.6419G	30.08	54.00	-23.92	0.69	3	Horizontal	360	1.00	-	29.39	28.86	5.84	34.01
AV	4.9842G	33.16	54.00	-20.84	4.21	3	Horizontal	360	1.00	-	28.95	31.46	6.79	34.04
PK	1.528G	41.35	74.00	-32.65	-4.70	3	Horizontal	360	1.00	-	46.05	25.63	3.68	34.01
PK	3.64G	43.09	74.00	-30.91	0.68	3	Horizontal	360	1.00	-	42.41	28.85	5.84	34.01
PK	4.984G	46.36	74.00	-27.64	4.21	3	Horizontal	360	1.00	-	42.15	31.46	6.79	34.04



Exposure Environment: General Population / Uncontrolled Exposure

For WLAN 2.4G

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;G1D	2.40	16.29	18.69	0.50	19.19	0.08299	20	0.01651	1.00000
2.4G;D1D	2.40	19.10	21.50	0.50	22.00	0.15849	20	0.03153	1.00000

1. Photographs of Conducted Emissions Test Configuration

Front view



Side view



Under Table View



2. Photographs of Radiated Emissions Test Configuration


For radiated emissions below 1GHz

TX

Front view



Rear view

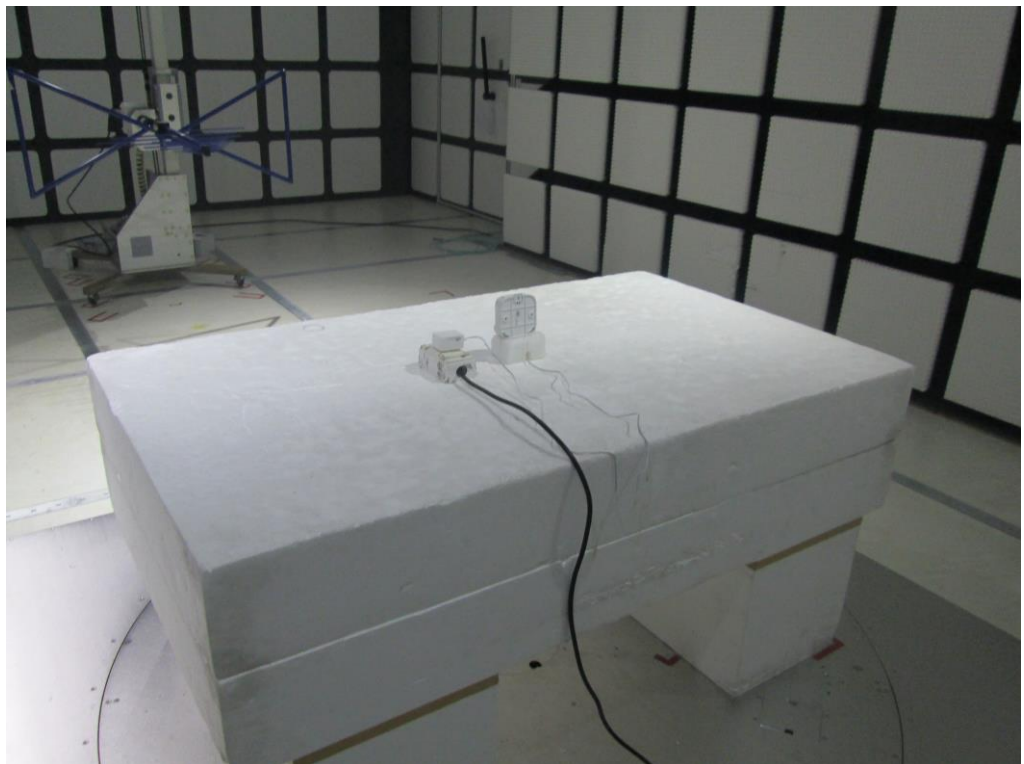


RX

Front view




Rear view

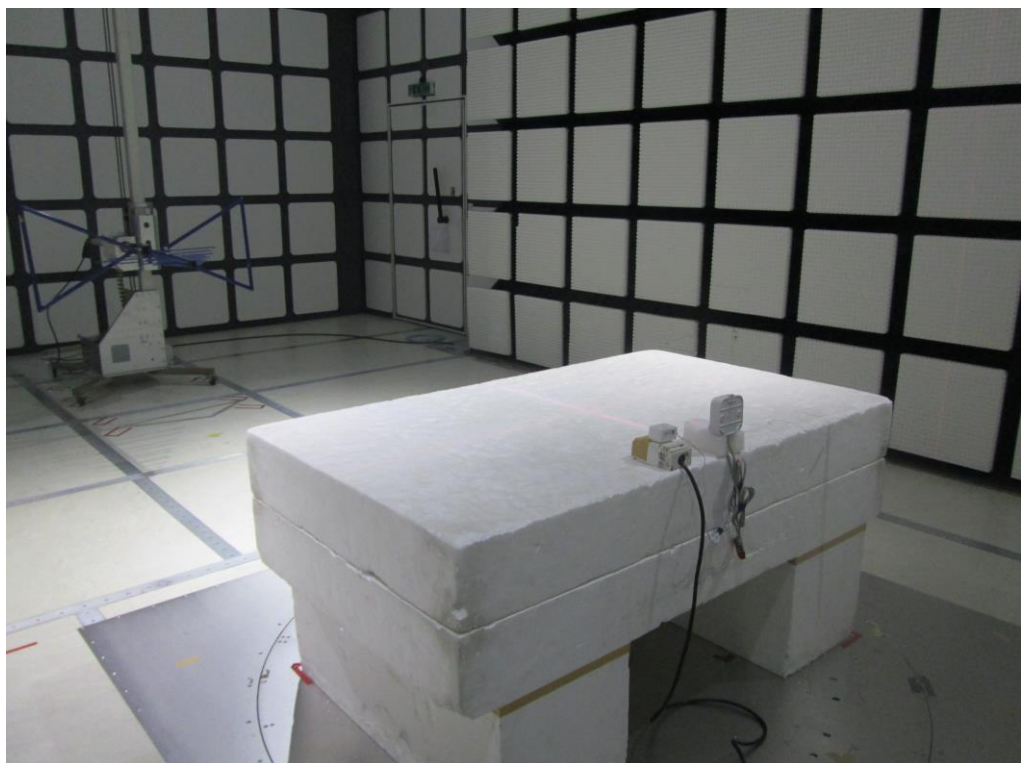


For radiated emissions above 1GHz
TX

Front view

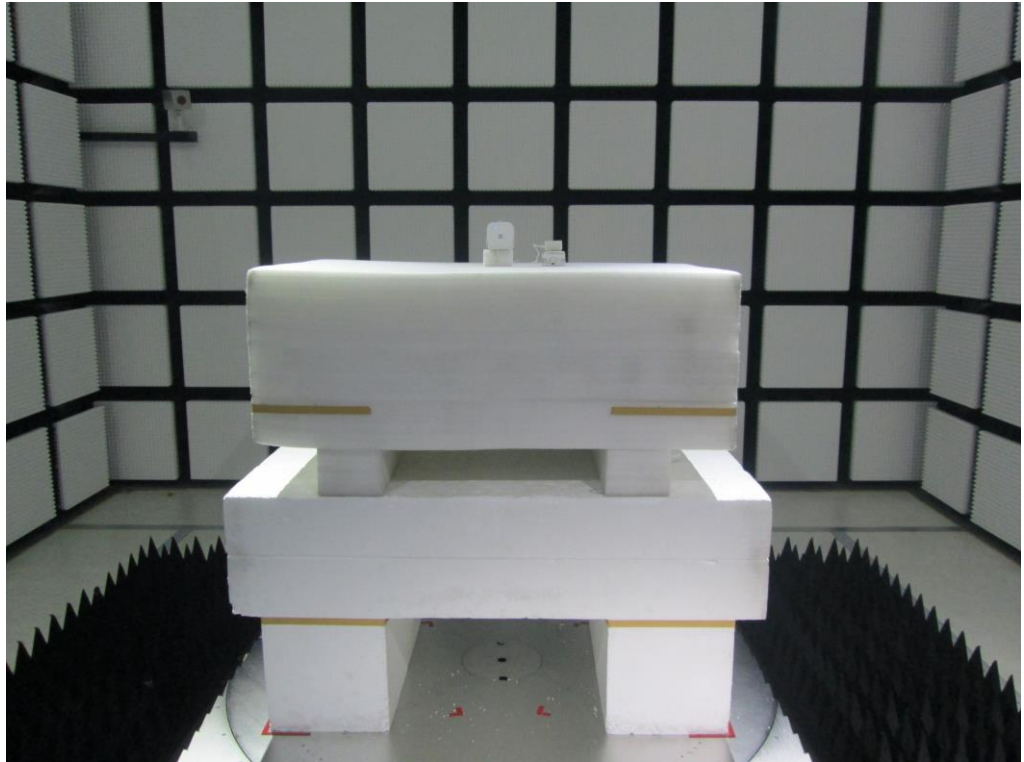


Rear view

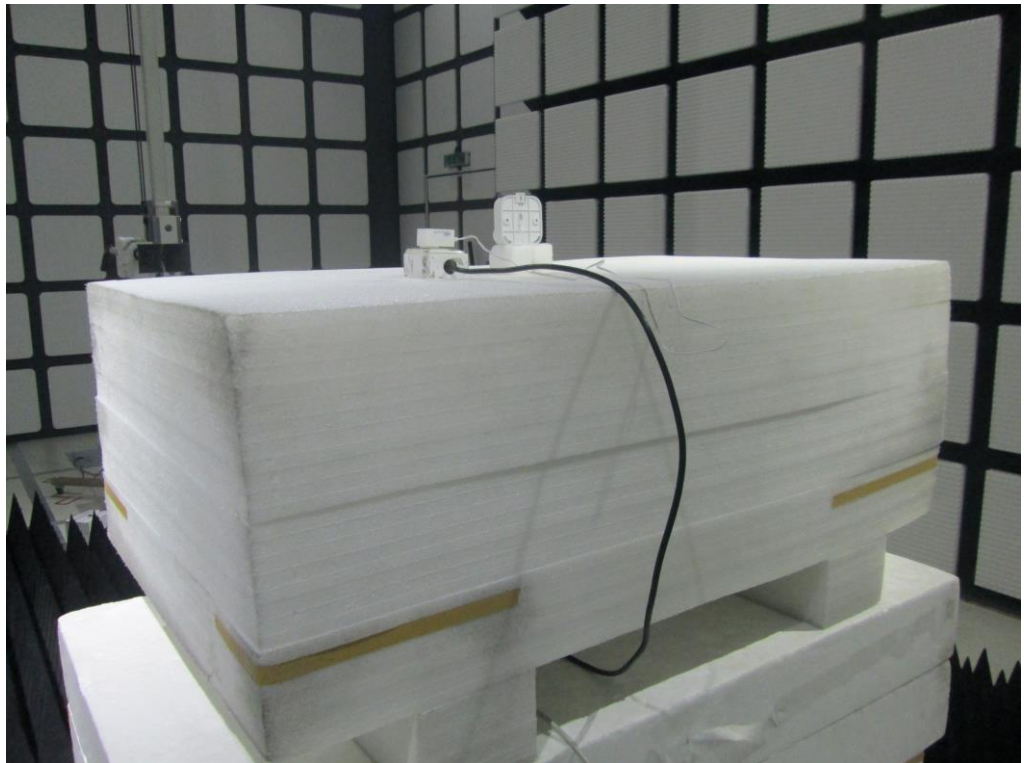

RX

Front view

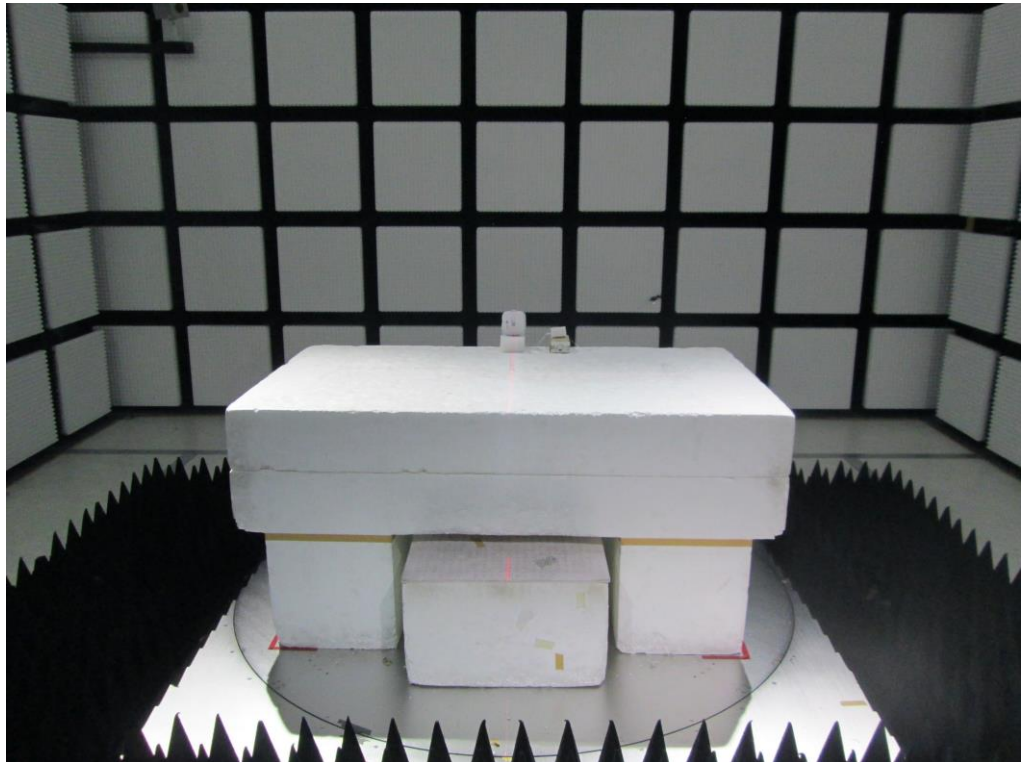

Rear view

