


Site: AC1	Time: 2020/04/23 - 10:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

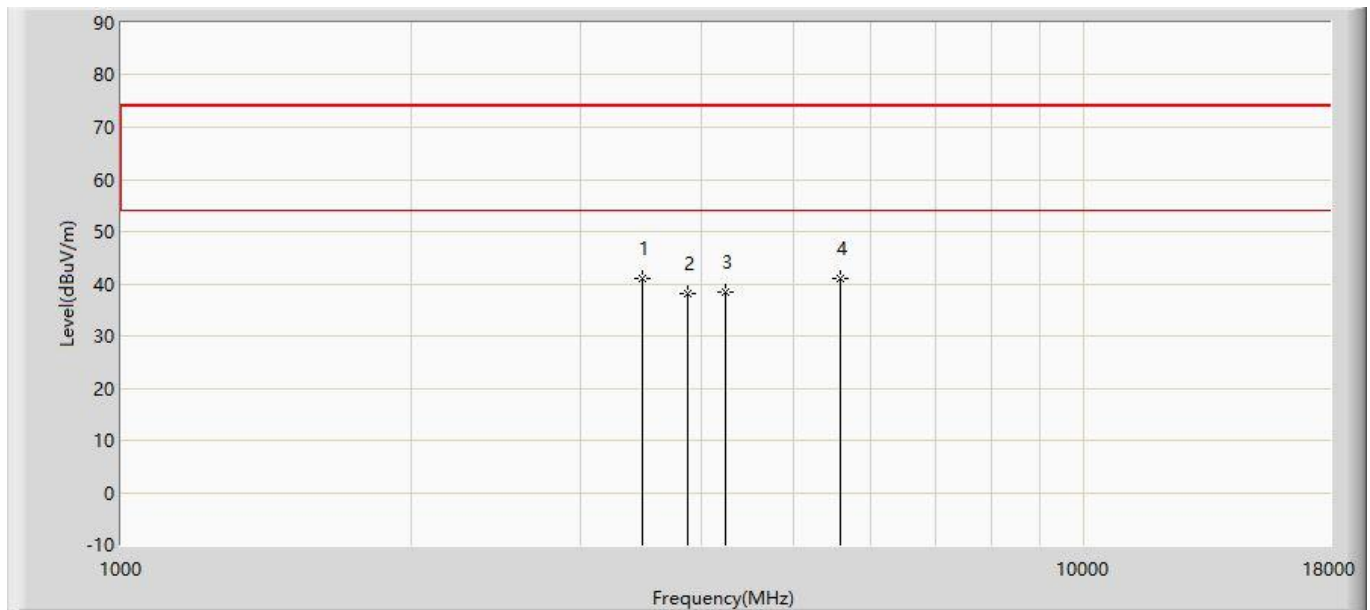


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	3482.000	41.137	42.437	-32.863	74.000	-1.300	PK
2			3873.000	38.143	38.398	-35.857	74.000	-0.255	PK
3			4238.500	38.448	37.190	-35.552	74.000	1.258	PK
4			5590.000	41.129	36.914	-32.871	74.000	4.215	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2437 MHz with OAW-AP1361D (CDD Mode)	

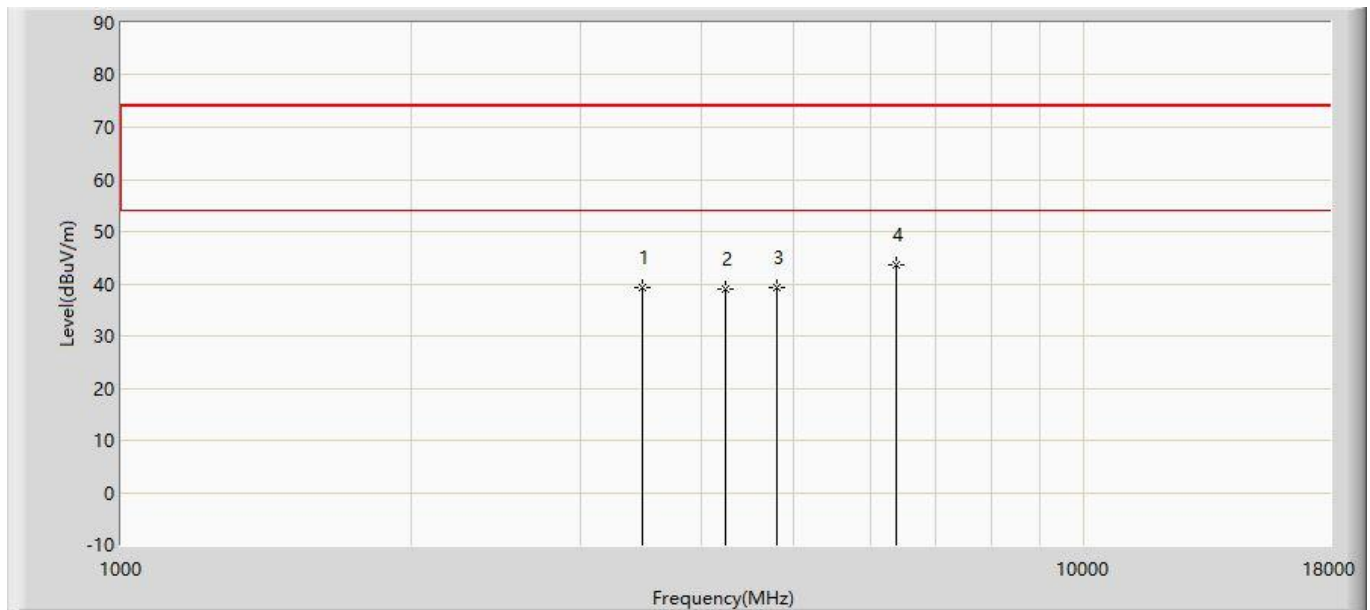


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	39.396	40.696	-34.604	74.000	-1.300	PK
2			4247.000	38.940	37.640	-35.060	74.000	1.300	PK
3			4799.500	39.281	36.132	-34.719	74.000	3.149	PK
4		*	6389.000	43.612	36.340	-30.388	74.000	7.272	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2437 MHz with OAW-AP1361D (CDD Mode)	

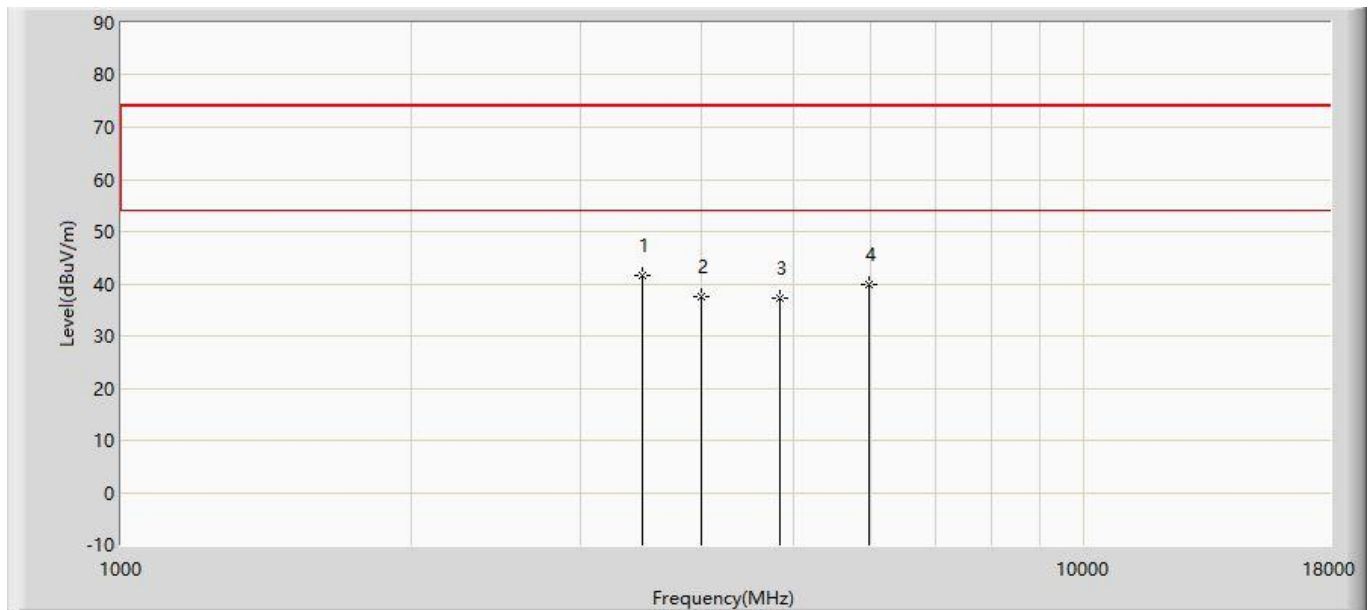


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	3482.000	41.704	43.004	-32.296	74.000	-1.300	PK
2			4000.500	37.560	37.469	-36.440	74.000	0.090	PK
3			4833.500	37.357	34.140	-36.643	74.000	3.217	PK
4			5972.500	39.825	34.140	-34.175	74.000	5.684	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

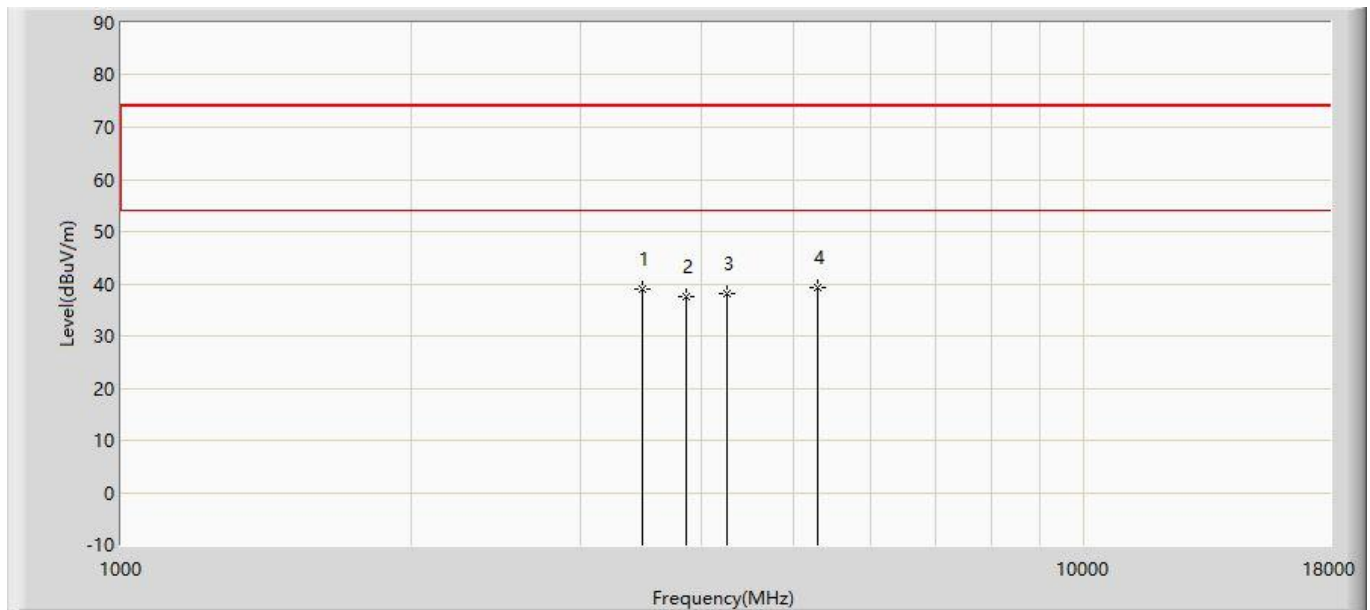


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	38.961	40.261	-35.039	74.000	-1.300	PK
2			3864.500	37.510	37.788	-36.490	74.000	-0.278	PK
3			4264.000	38.081	36.697	-35.919	74.000	1.384	PK
4		*	5284.000	39.263	35.532	-34.737	74.000	3.731	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

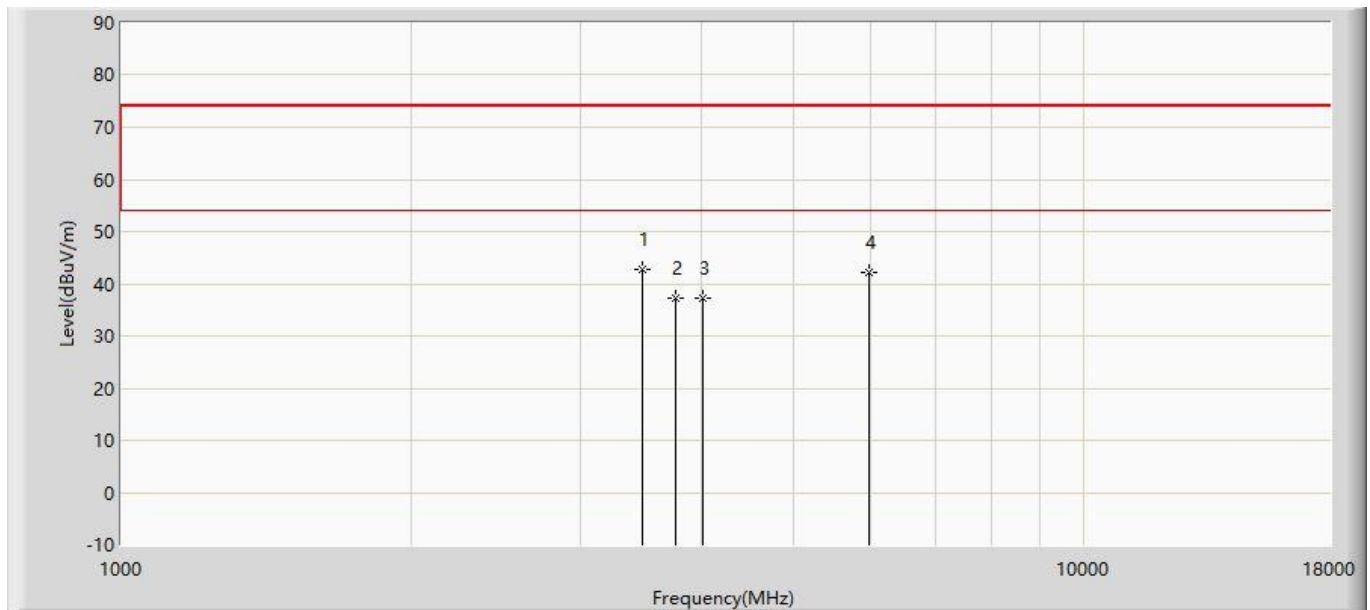


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	3482.000	42.849	44.149	-31.151	74.000	-1.300	PK
2			3771.000	37.365	37.890	-36.635	74.000	-0.525	PK
3			4017.500	37.141	36.975	-36.859	74.000	0.165	PK
4			5981.000	42.311	36.594	-31.689	74.000	5.717	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

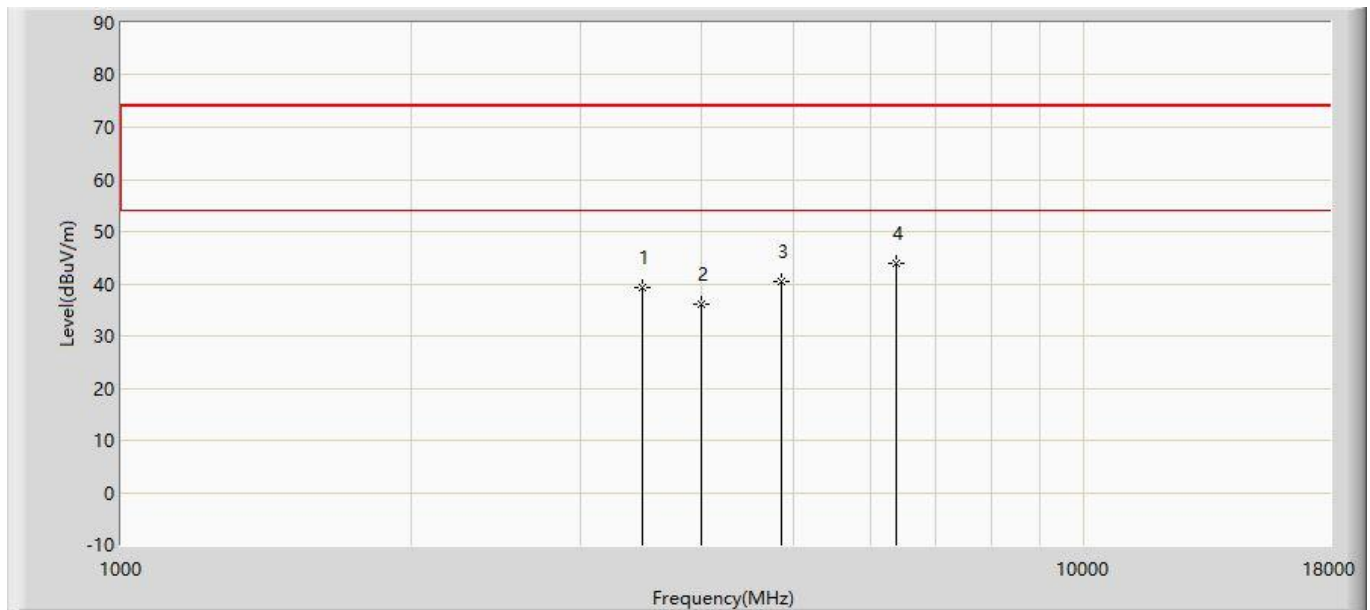


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	39.145	40.445	-34.855	74.000	-1.300	PK
2			4009.000	36.150	36.025	-37.850	74.000	0.125	PK
3			4842.000	40.350	37.116	-33.650	74.000	3.234	PK
4		*	6380.500	43.777	36.537	-30.223	74.000	7.239	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

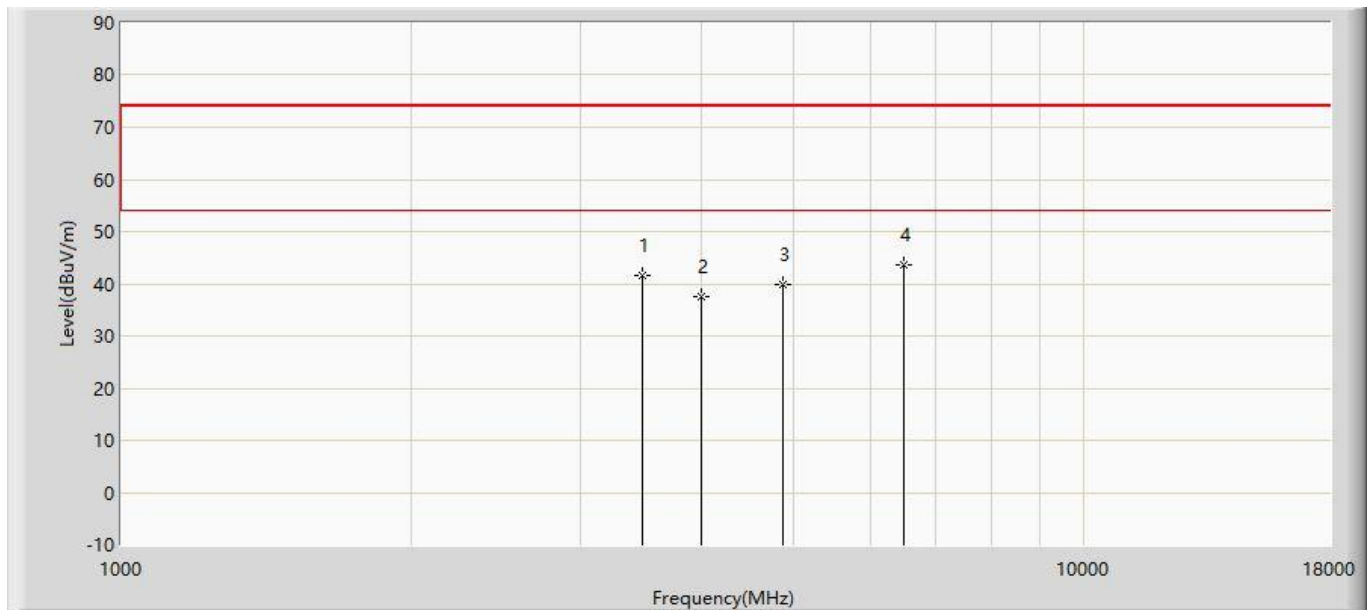


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	41.686	42.986	-32.314	74.000	-1.300	PK
2			4000.500	37.661	37.570	-36.339	74.000	0.090	PK
3			4867.500	39.873	36.588	-34.127	74.000	3.286	PK
4		*	6499.500	43.741	36.040	-30.259	74.000	7.700	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2437 MHz with OAW-AP1361D (CDD Mode)	

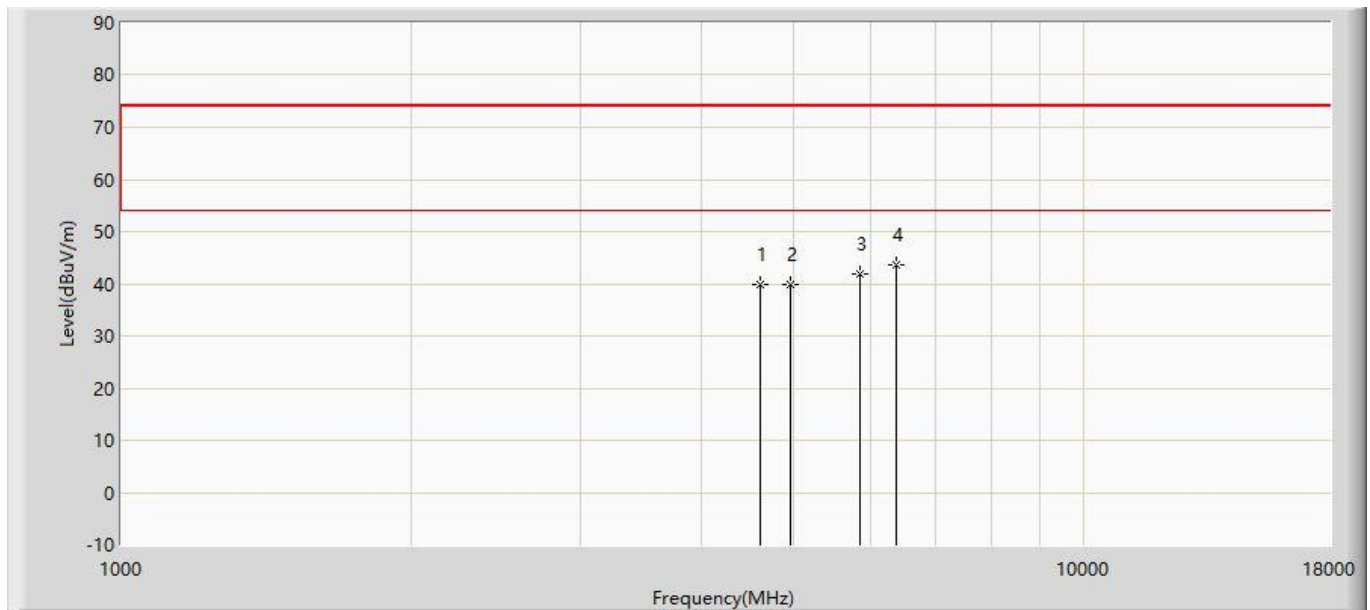


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4612.500	39.762	36.987	-34.238	74.000	2.776	PK
2			4961.000	39.967	36.495	-34.033	74.000	3.472	PK
3			5862.000	41.921	36.661	-32.079	74.000	5.260	PK
4		*	6389.000	43.718	36.446	-30.282	74.000	7.272	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2437 MHz with OAW-AP1361D (CDD Mode)	

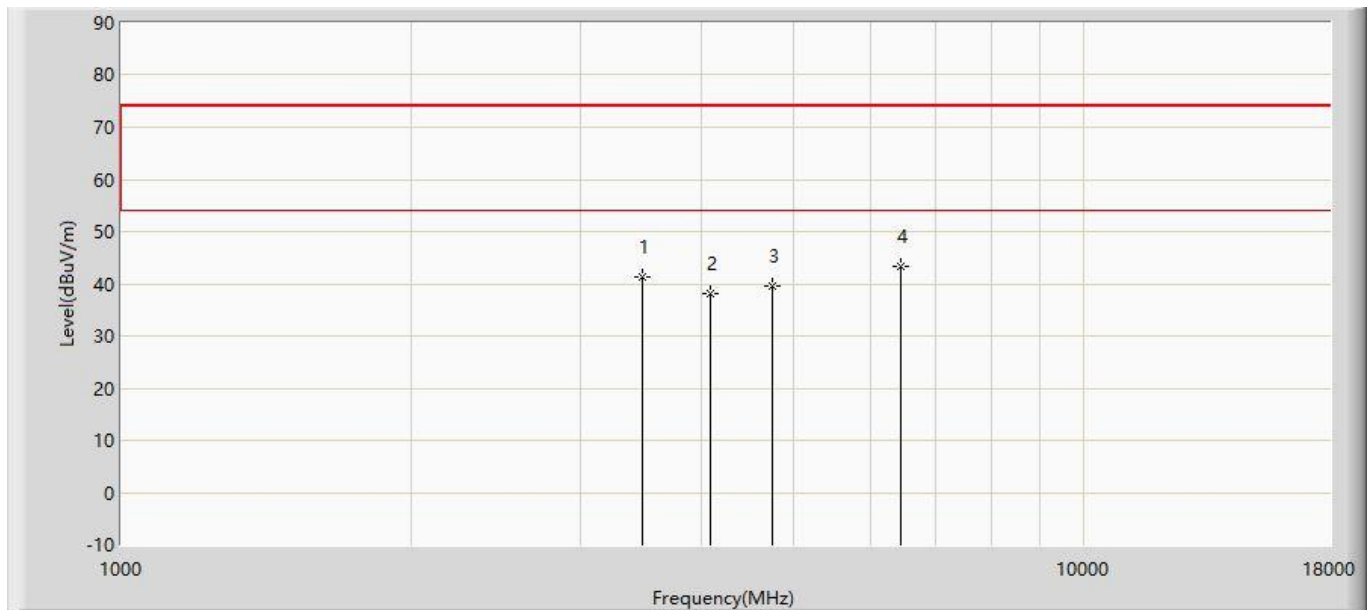


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	41.244	42.544	-32.756	74.000	-1.300	PK
2			4085.500	38.163	37.660	-35.837	74.000	0.503	PK
3			4740.000	39.494	36.464	-34.506	74.000	3.030	PK
4		*	6457.000	43.470	35.939	-30.530	74.000	7.531	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

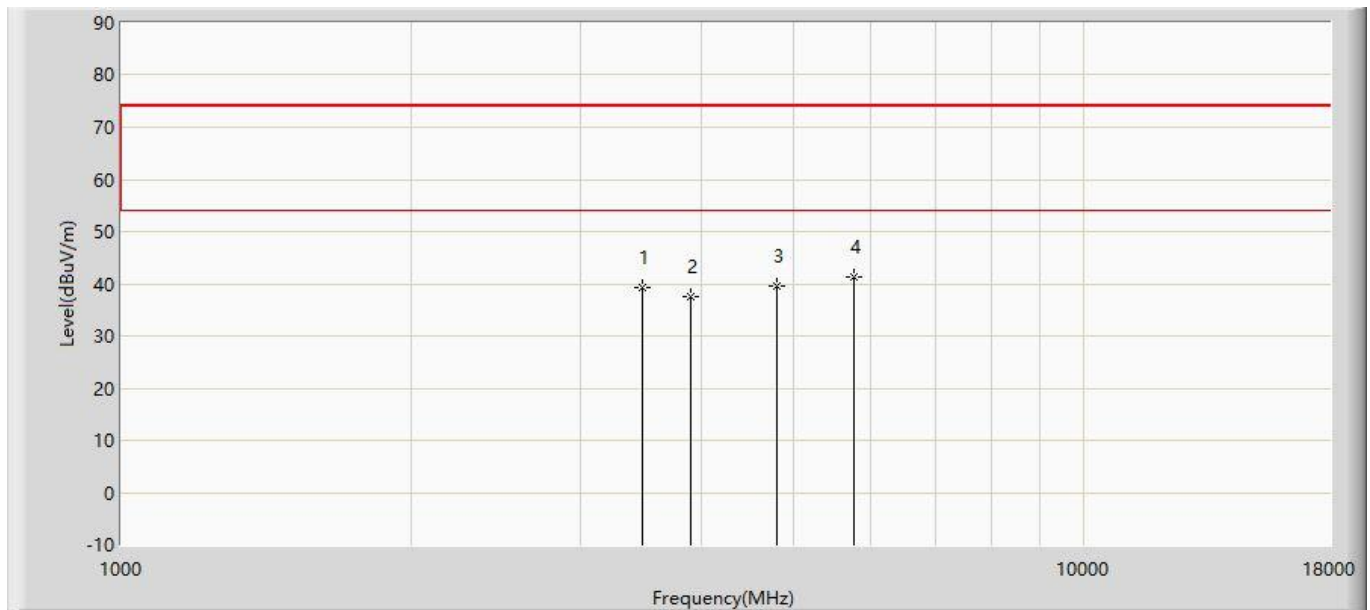


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	39.273	40.573	-34.727	74.000	-1.300	PK
2			3898.500	37.423	37.611	-36.577	74.000	-0.187	PK
3			4799.500	39.529	36.380	-34.471	74.000	3.149	PK
4		*	5777.000	41.395	36.461	-32.605	74.000	4.934	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

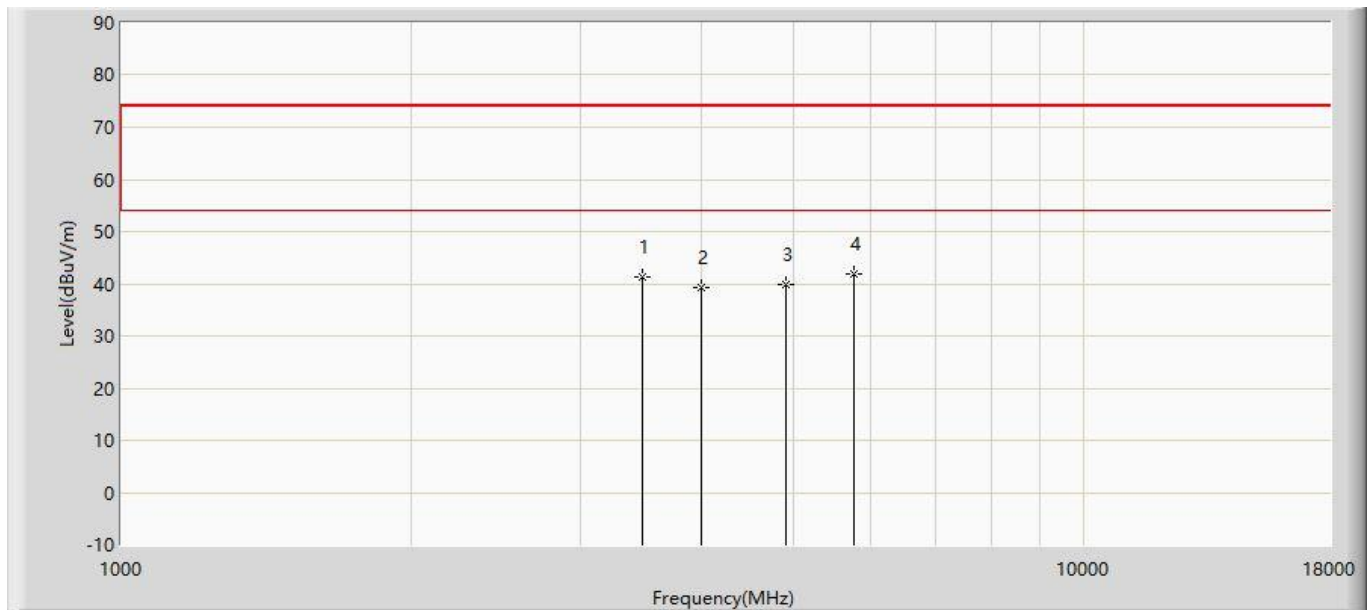


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	41.361	42.661	-32.639	74.000	-1.300	PK
2			4000.500	39.242	39.151	-34.758	74.000	0.090	PK
3			4910.000	39.922	36.552	-34.078	74.000	3.370	PK
4		*	5777.000	41.836	36.902	-32.164	74.000	4.934	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

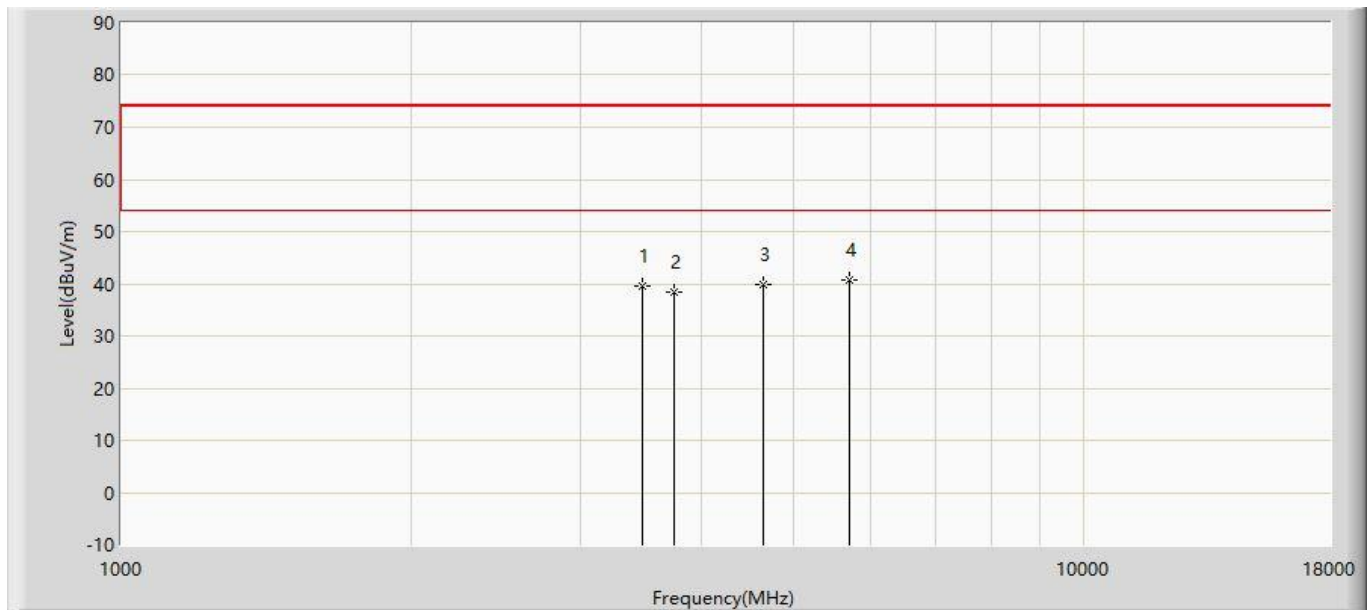


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	39.672	40.972	-34.328	74.000	-1.300	PK
2			3745.500	38.386	38.978	-35.614	74.000	-0.592	PK
3			4638.000	39.932	37.106	-34.068	74.000	2.826	PK
4		*	5709.000	40.744	36.072	-33.256	74.000	4.672	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

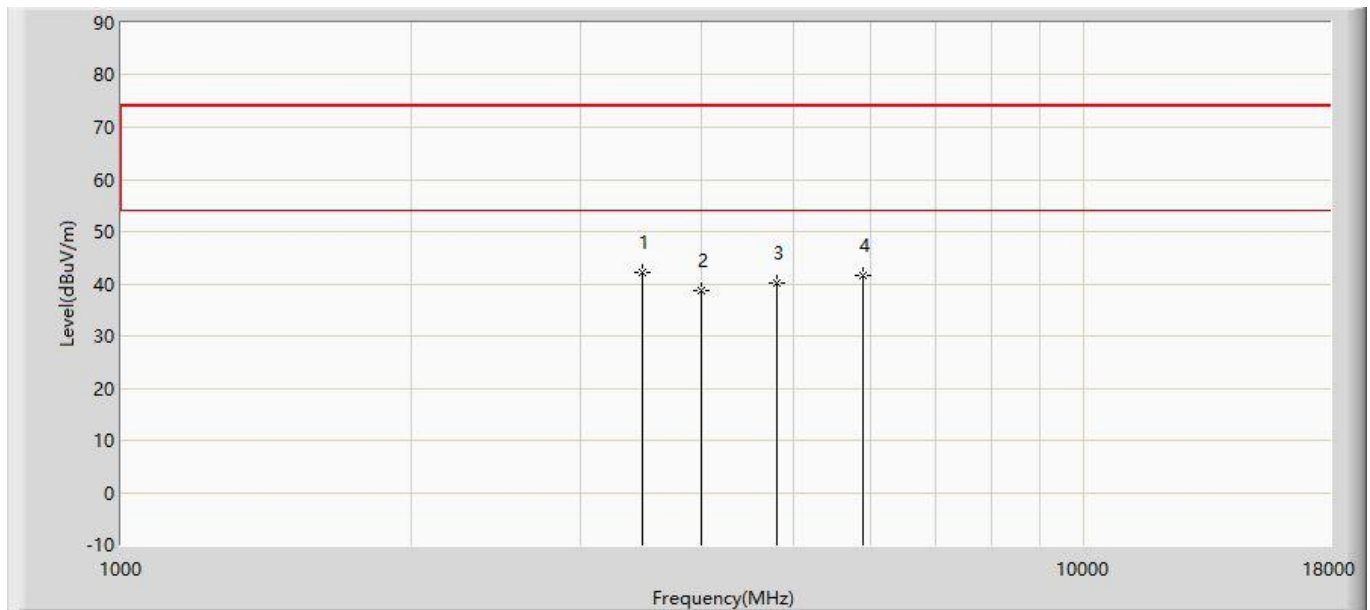


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	3482.000	42.090	43.390	-31.910	74.000	-1.300	PK
2			4000.500	38.643	38.552	-35.357	74.000	0.090	PK
3			4791.000	40.179	37.047	-33.821	74.000	3.132	PK
4			5887.500	41.457	36.099	-32.543	74.000	5.358	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437 MHz with OAW-AP1361D (CDD Mode)	

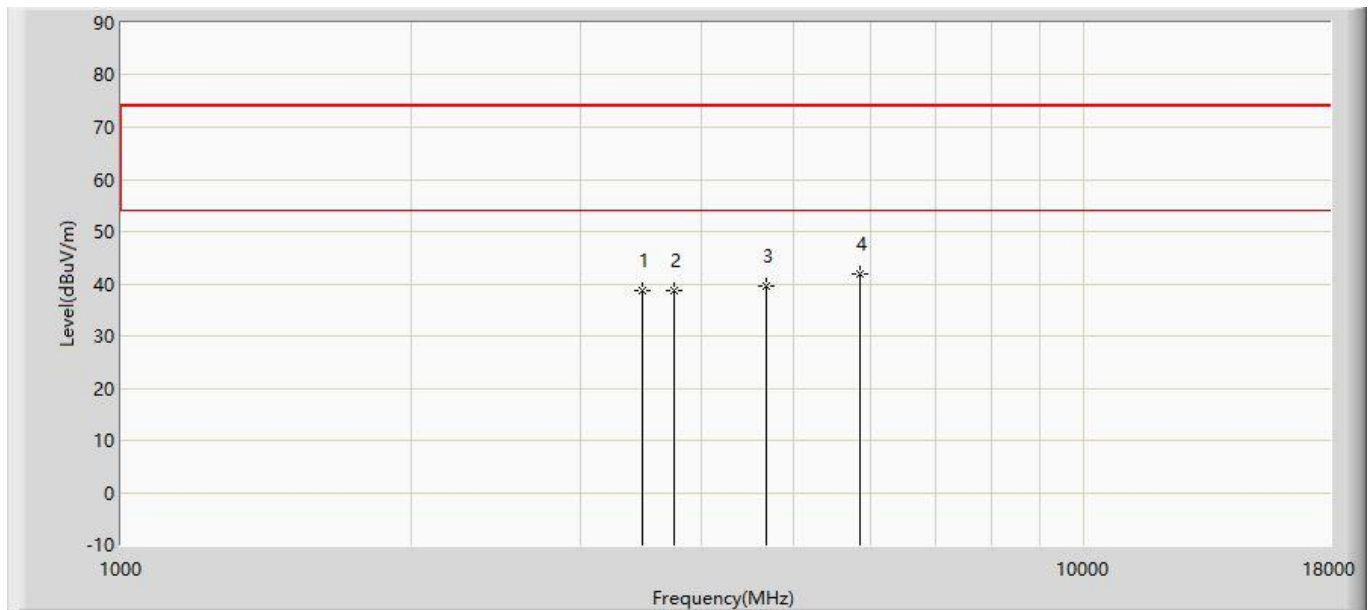


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	38.813	40.113	-35.187	74.000	-1.300	PK
2			3754.000	38.608	39.177	-35.392	74.000	-0.569	PK
3			4680.500	39.524	36.613	-34.476	74.000	2.911	PK
4		*	5853.500	41.831	36.604	-32.169	74.000	5.227	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437 MHz with OAW-AP1361D (CDD Mode)	

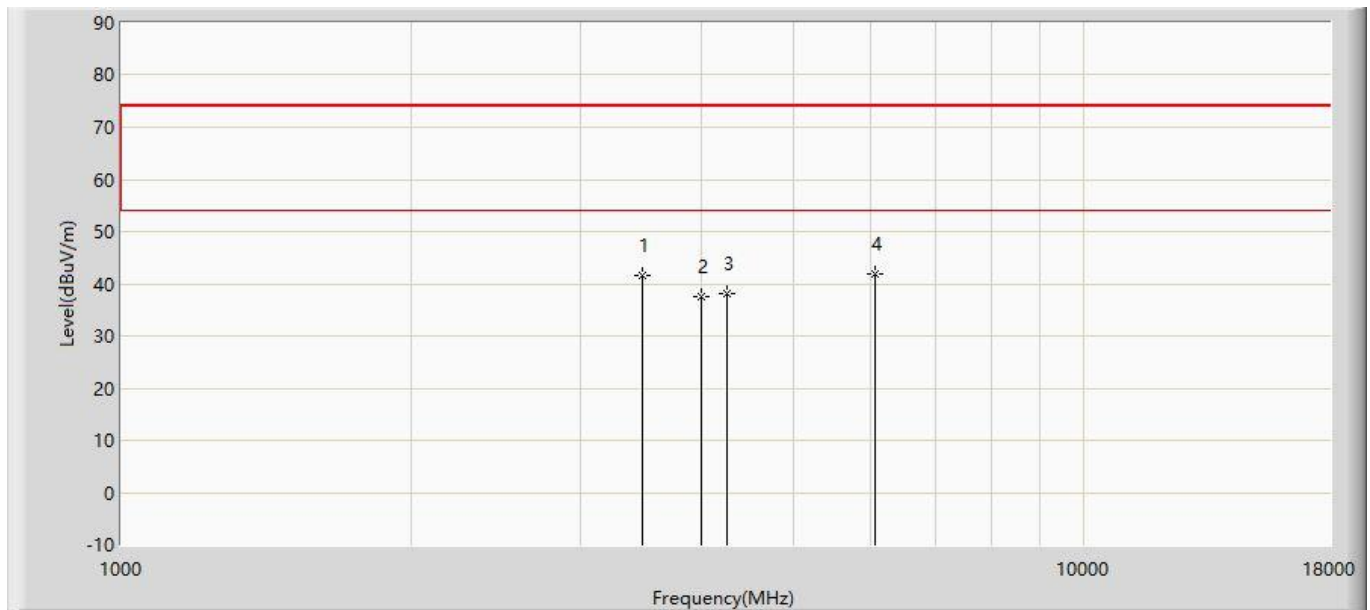


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	41.491	42.791	-32.509	74.000	-1.300	PK
2			4000.500	37.456	37.365	-36.544	74.000	0.090	PK
3			4255.500	37.986	36.644	-36.014	74.000	1.342	PK
4		*	6074.500	41.789	35.715	-32.211	74.000	6.073	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

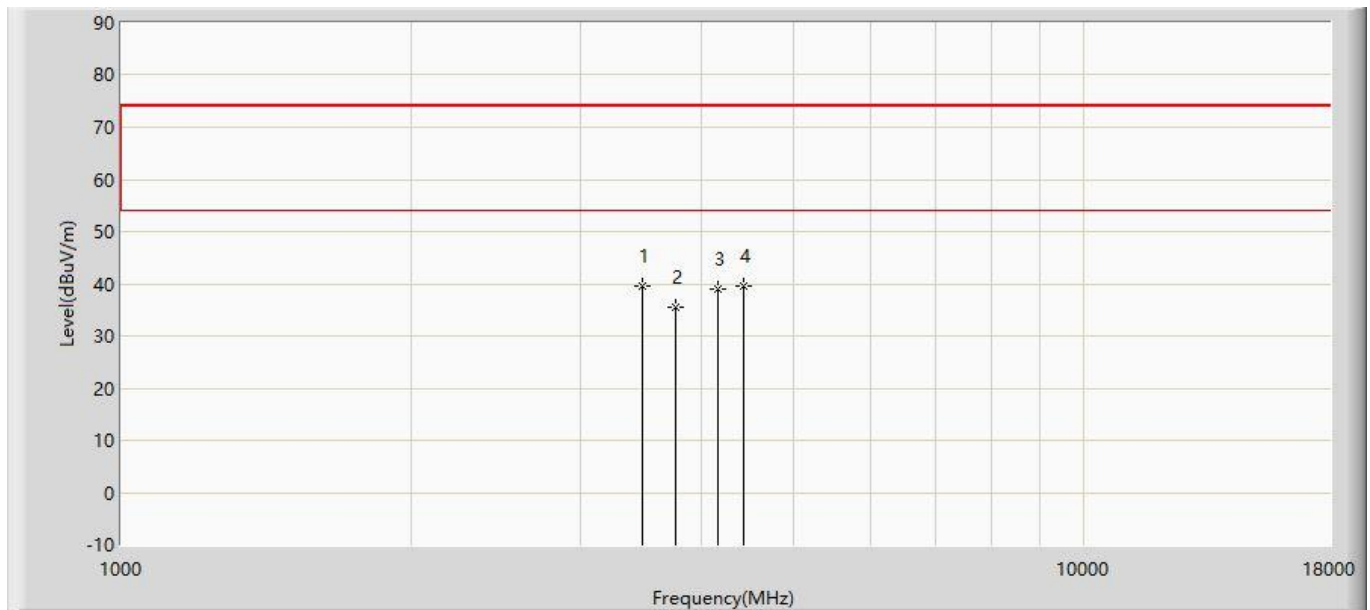


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	3482.000	39.636	40.936	-34.364	74.000	-1.300	PK
2			3762.500	35.486	36.033	-38.514	74.000	-0.546	PK
3			4162.000	38.890	38.009	-35.110	74.000	0.881	PK
4			4434.000	39.564	37.340	-34.436	74.000	2.224	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

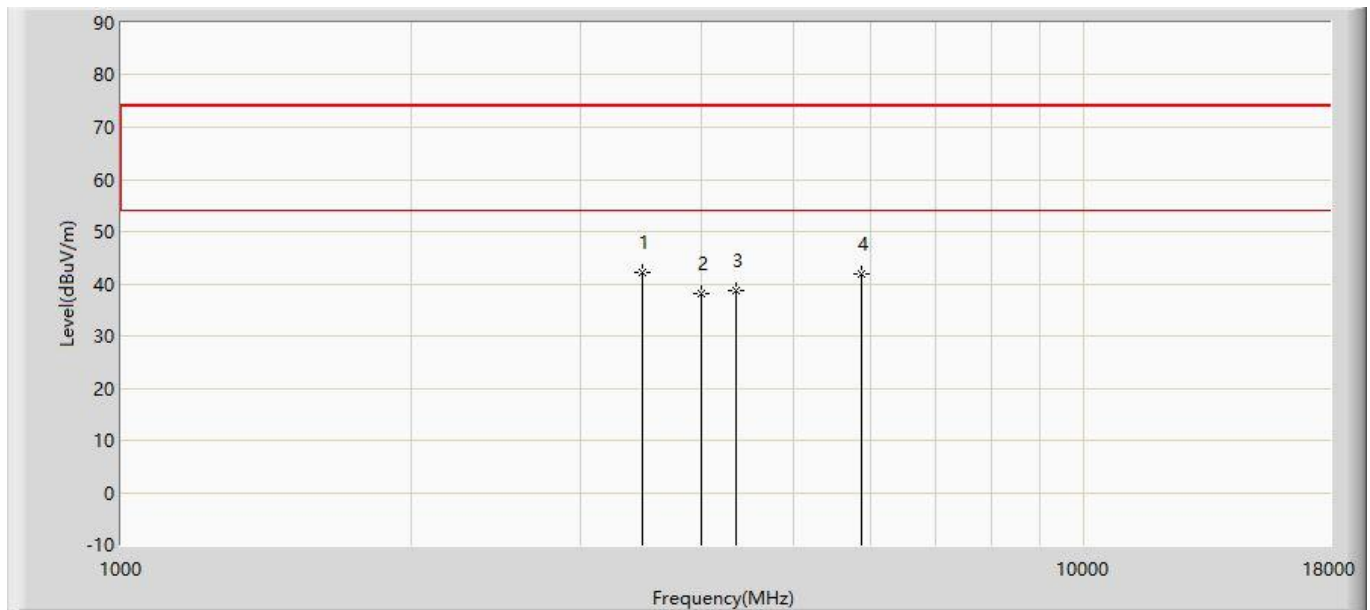


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	3482.000	42.037	43.337	-31.963	74.000	-1.300	PK
2			4000.500	38.020	37.929	-35.980	74.000	0.090	PK
3			4349.000	38.655	36.851	-35.345	74.000	1.804	PK
4			5870.500	41.750	36.457	-32.250	74.000	5.293	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

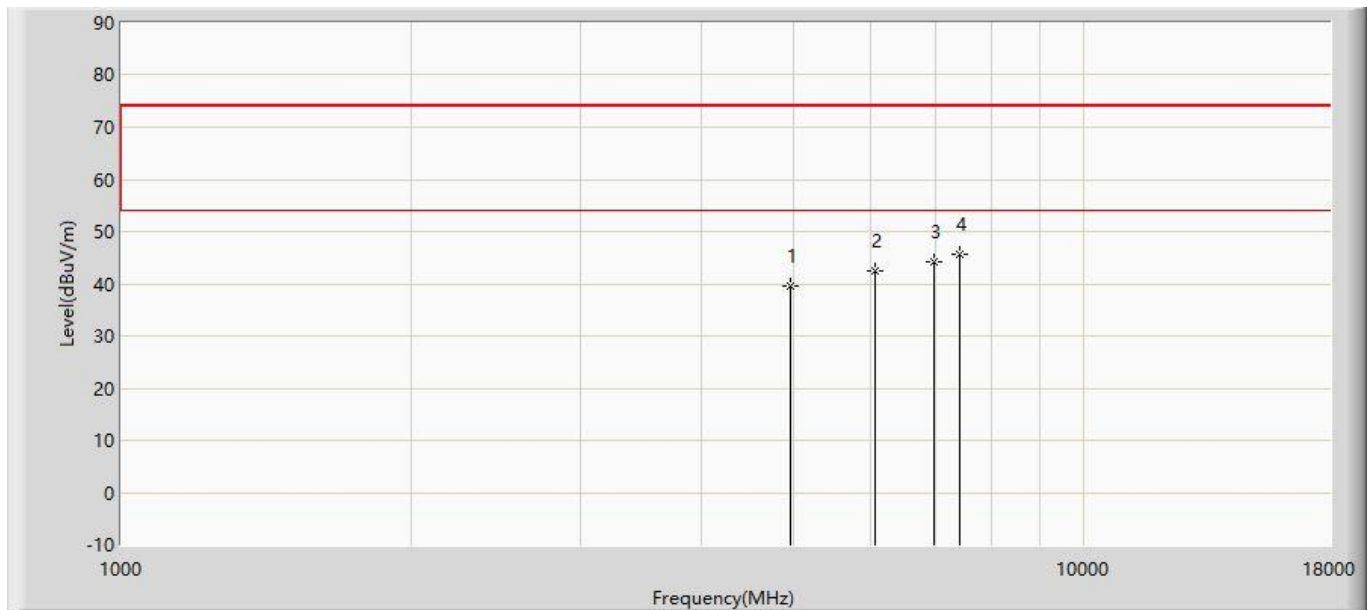


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4952.500	39.581	36.126	-34.419	74.000	3.456	PK
2			6057.500	42.482	36.473	-31.518	74.000	6.008	PK
3			6984.000	44.233	33.726	-29.767	74.000	10.507	PK
4		*	7426.000	45.759	34.210	-28.241	74.000	11.549	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

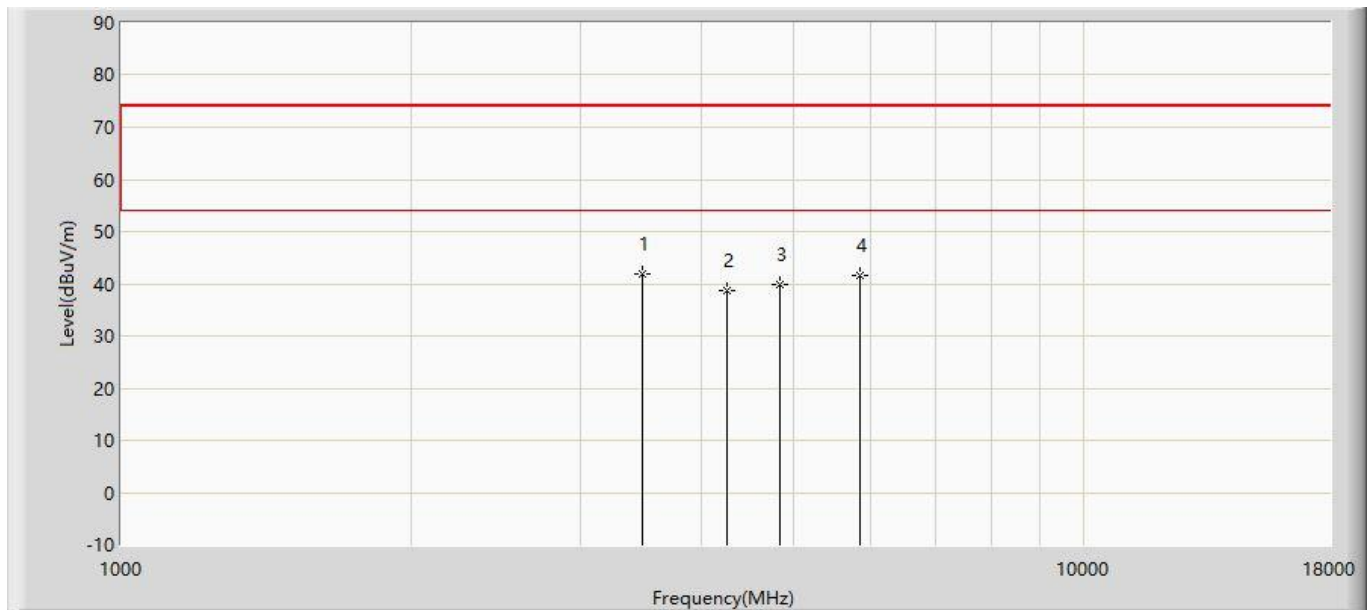


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	3482.000	42.026	43.326	-31.974	74.000	-1.300	PK
2			4255.500	38.790	37.448	-35.210	74.000	1.342	PK
3			4833.500	39.934	36.717	-34.066	74.000	3.217	PK
4			5845.000	41.738	36.543	-32.262	74.000	5.195	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437 MHz with OAW-AP1361D (CDD Mode)	

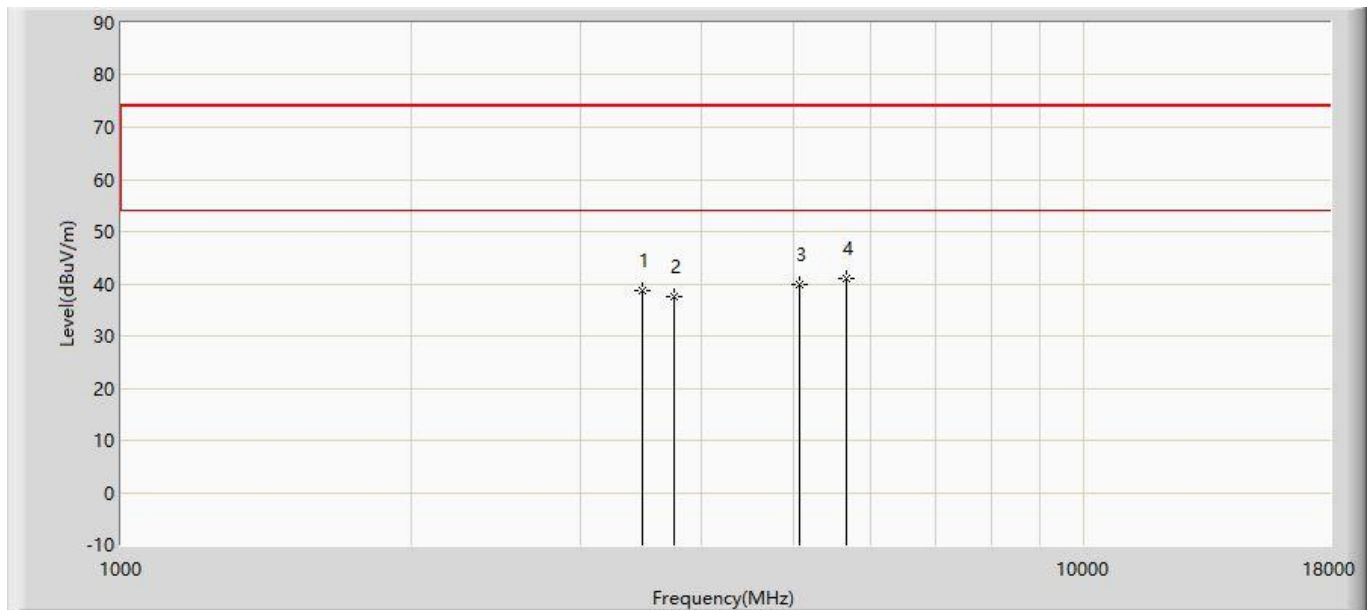


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	38.642	39.942	-35.358	74.000	-1.300	PK
2			3754.000	37.671	38.240	-36.329	74.000	-0.569	PK
3			5071.500	39.980	36.384	-34.020	74.000	3.596	PK
4		*	5666.500	41.048	36.538	-32.952	74.000	4.509	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437 MHz with OAW-AP1361D (CDD Mode)	

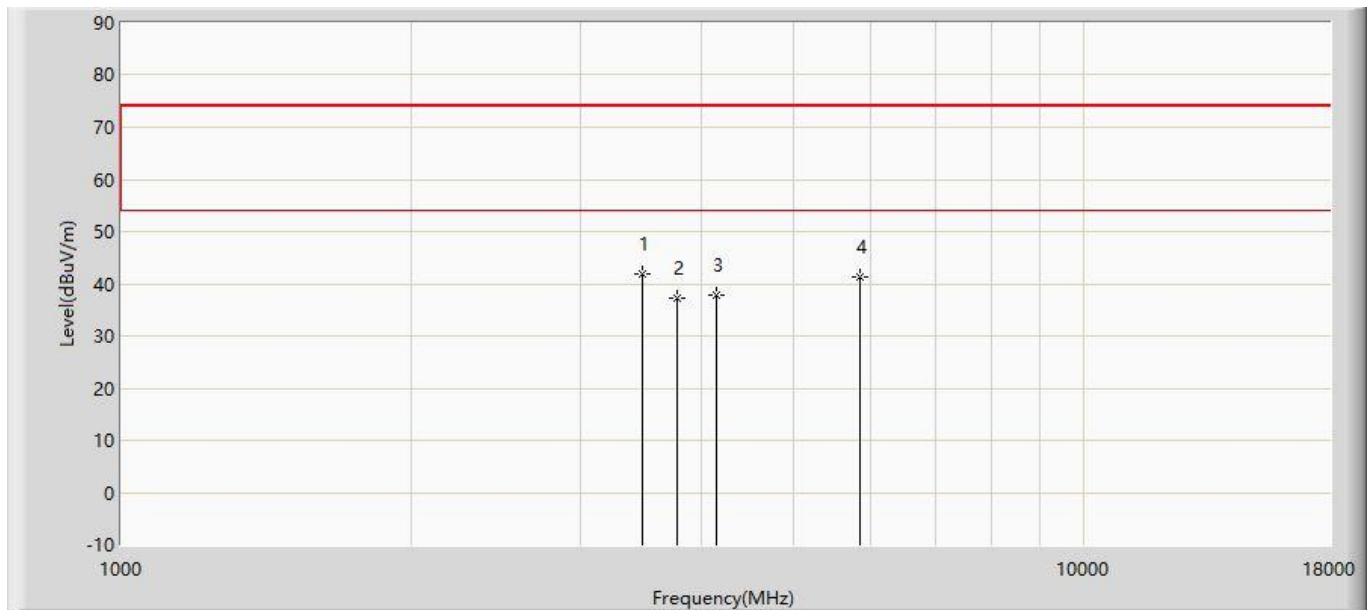


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	3482.000	41.937	43.237	-32.063	74.000	-1.300	PK
2			3779.500	37.198	37.700	-36.802	74.000	-0.502	PK
3			4153.500	37.704	36.865	-36.296	74.000	0.839	PK
4			5853.500	41.371	36.144	-32.629	74.000	5.227	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

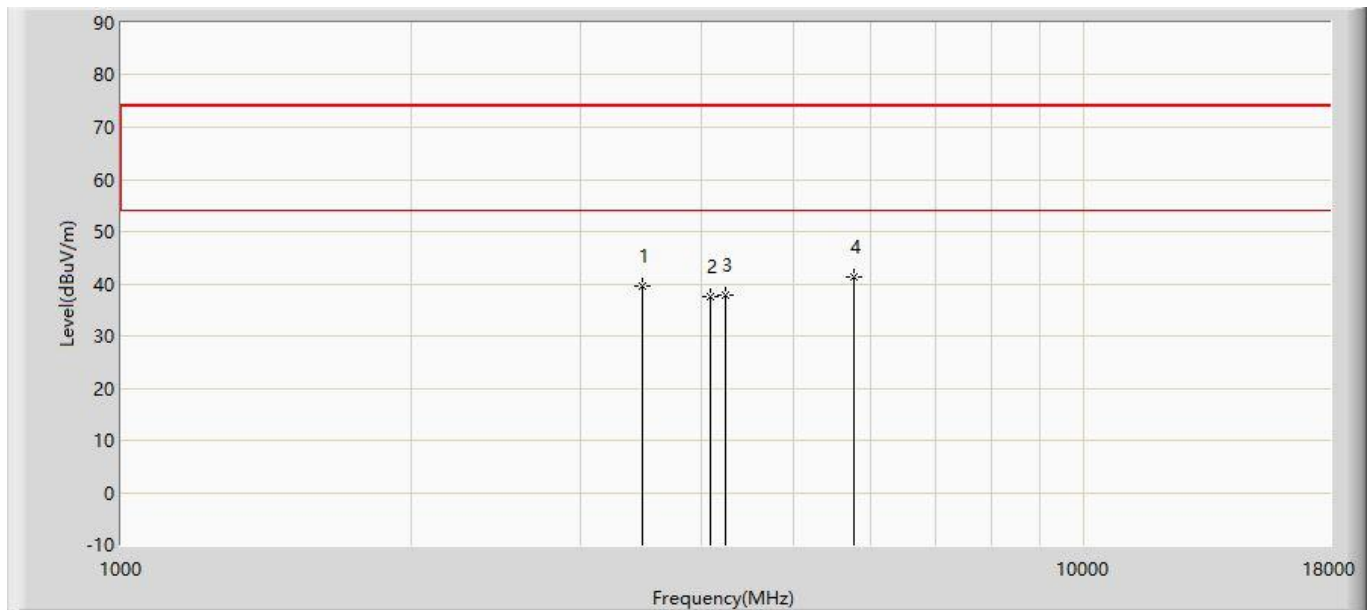


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			3482.000	39.439	40.739	-34.561	74.000	-1.300	PK
2			4085.500	37.568	37.065	-36.432	74.000	0.503	PK
3			4247.000	37.945	36.645	-36.055	74.000	1.300	PK
4		*	5777.000	41.411	36.477	-32.589	74.000	4.934	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 10:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

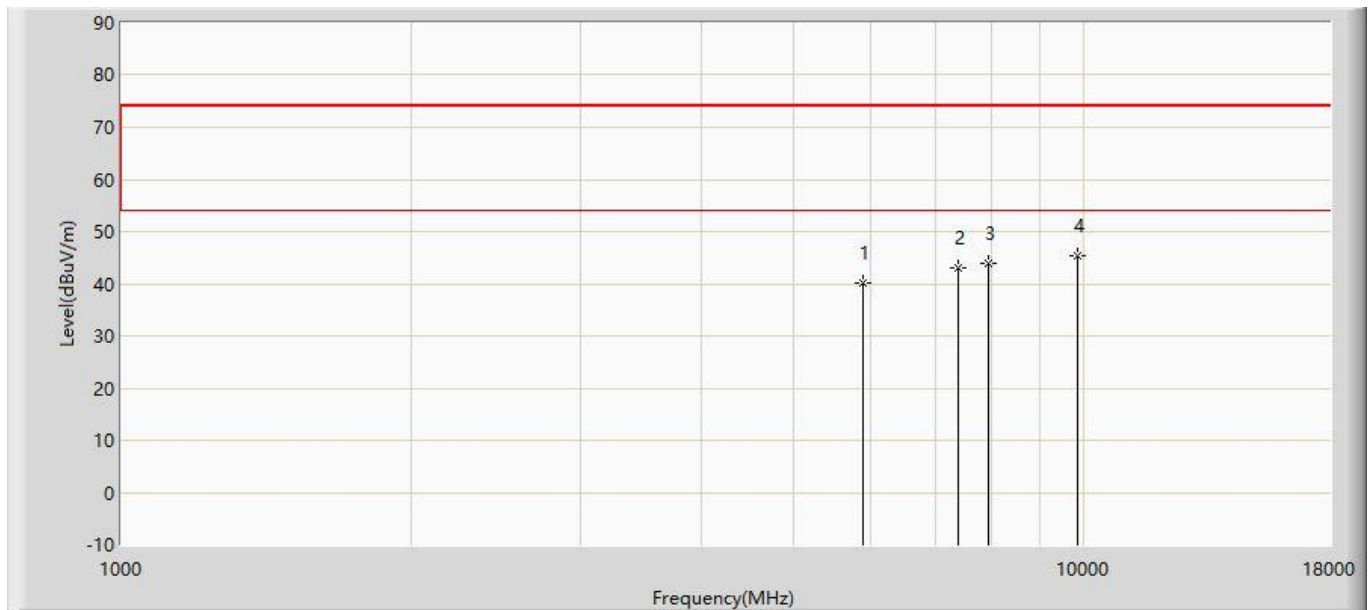


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5904.500	40.004	34.581	-33.996	74.000	5.422	PK
2			7392.000	43.181	31.708	-30.819	74.000	11.473	PK
3			7961.500	43.873	31.683	-30.127	74.000	12.190	PK
4		*	9848.500	45.381	30.618	-28.619	74.000	14.763	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

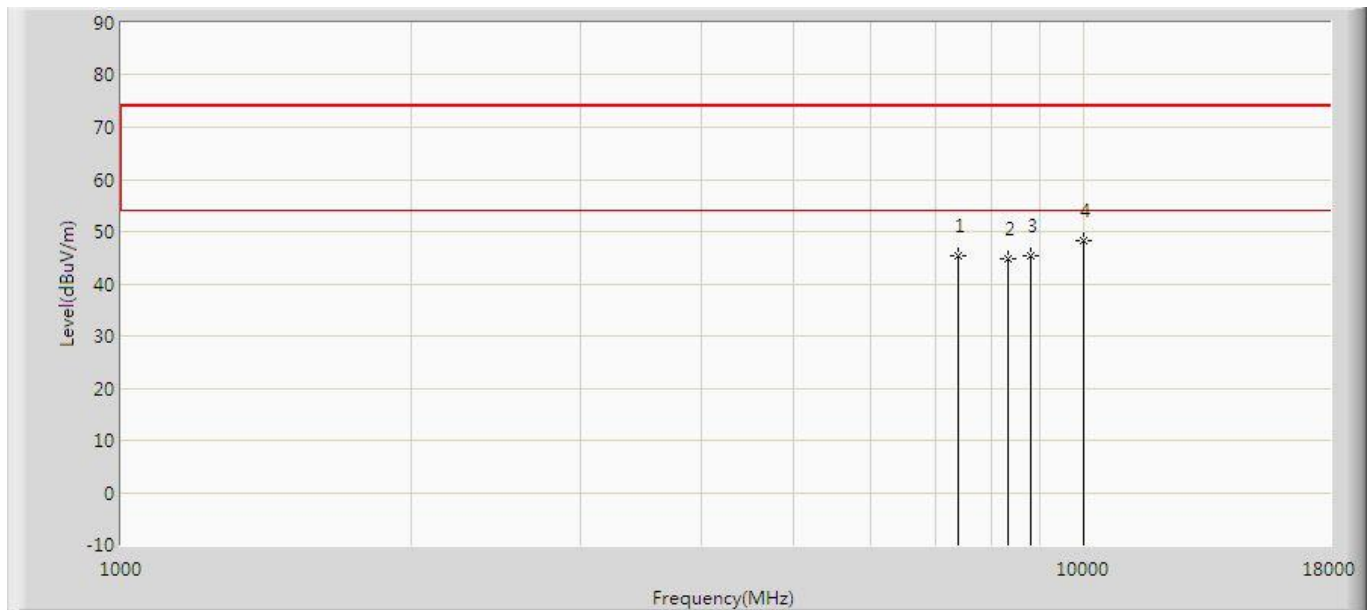


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	45.345	33.833	-28.655	74.000	11.512	PK
2			8344.000	44.828	32.444	-29.172	74.000	12.384	PK
3			8794.500	45.482	32.247	-28.518	74.000	13.235	PK
4		*	9984.500	48.245	33.035	-25.755	74.000	15.210	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

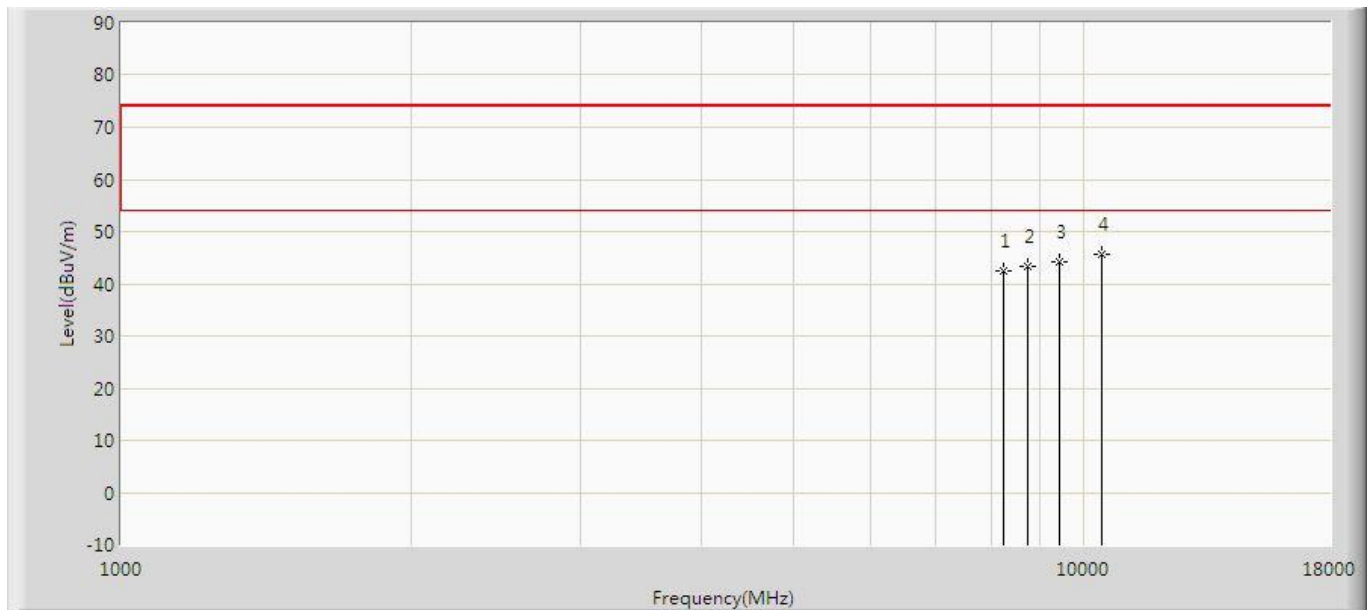


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8250.500	42.504	30.161	-31.496	74.000	12.343	PK
2			8735.000	43.473	30.395	-30.527	74.000	13.078	PK
3			9440.500	44.345	30.706	-29.655	74.000	13.638	PK
4		*	10426.500	45.643	29.009	-28.357	74.000	16.634	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz with OAW-AP1361D (Beam-Forming Mode)	

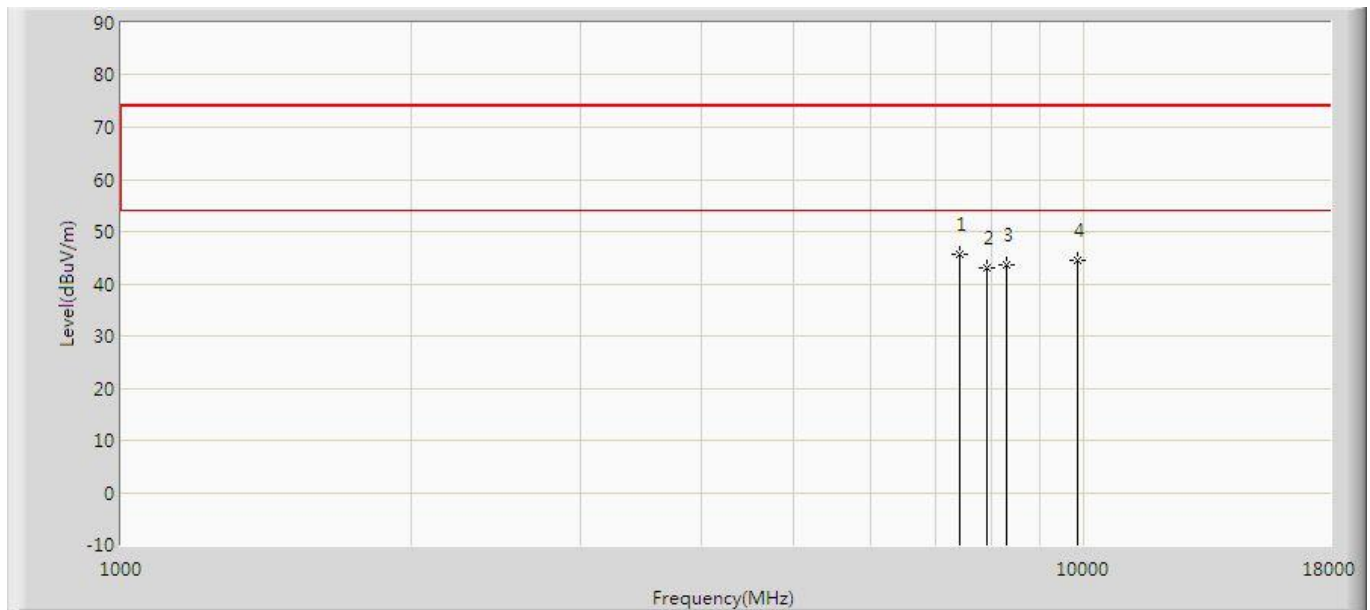


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	7434.500	45.567	33.998	-28.433	74.000	11.569	PK
2			7927.500	42.971	30.815	-31.029	74.000	12.155	PK
3			8310.000	43.494	31.125	-30.506	74.000	12.369	PK
4			9840.000	44.573	29.838	-29.427	74.000	14.735	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz with OAW-AP1361D (Beam-Forming Mode)	

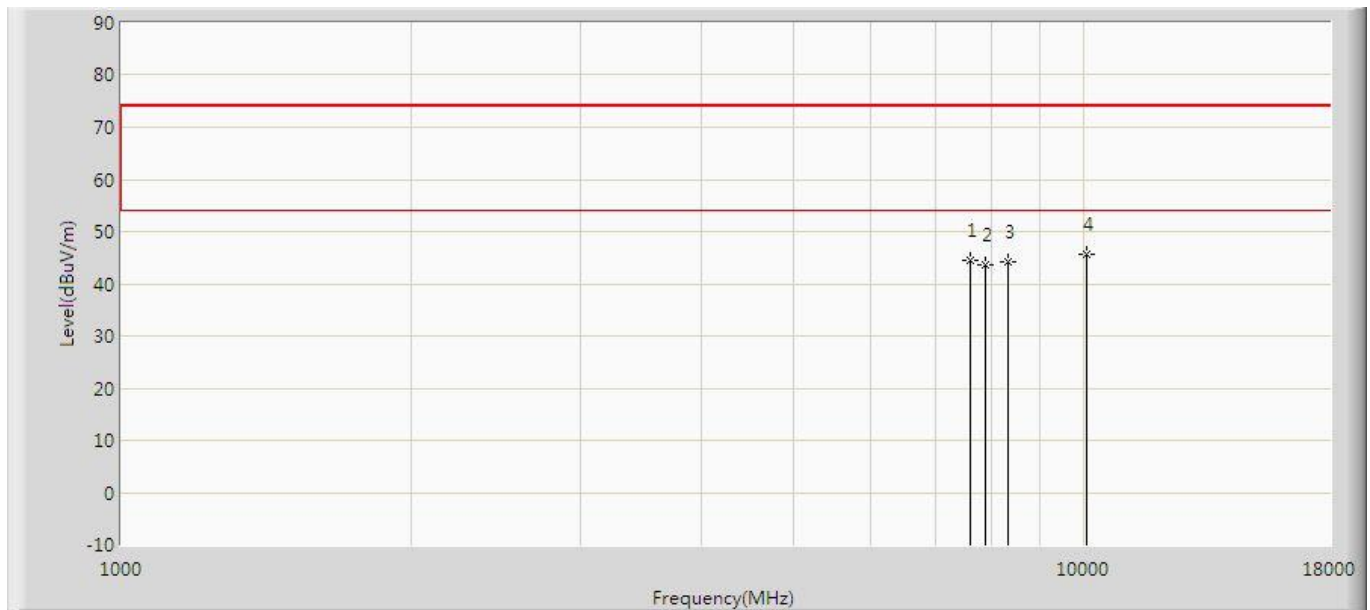


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7621.500	44.486	32.646	-29.514	74.000	11.840	PK
2			7910.500	43.496	31.357	-30.504	74.000	12.138	PK
3			8352.500	44.208	31.820	-29.792	74.000	12.388	PK
4		*	10078.000	45.729	30.217	-28.271	74.000	15.512	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

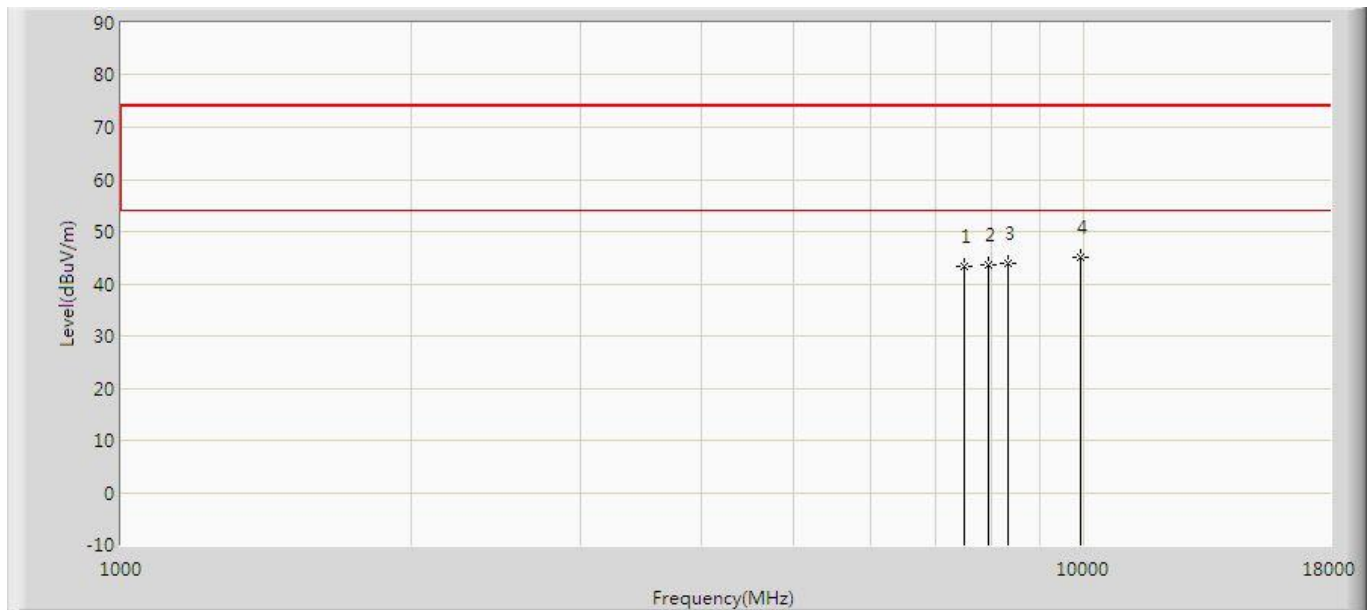


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	43.373	31.659	-30.627	74.000	11.714	PK
2			7953.000	43.591	31.410	-30.409	74.000	12.181	PK
3			8352.500	43.772	31.384	-30.228	74.000	12.388	PK
4		*	9899.500	45.011	30.080	-28.989	74.000	14.931	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

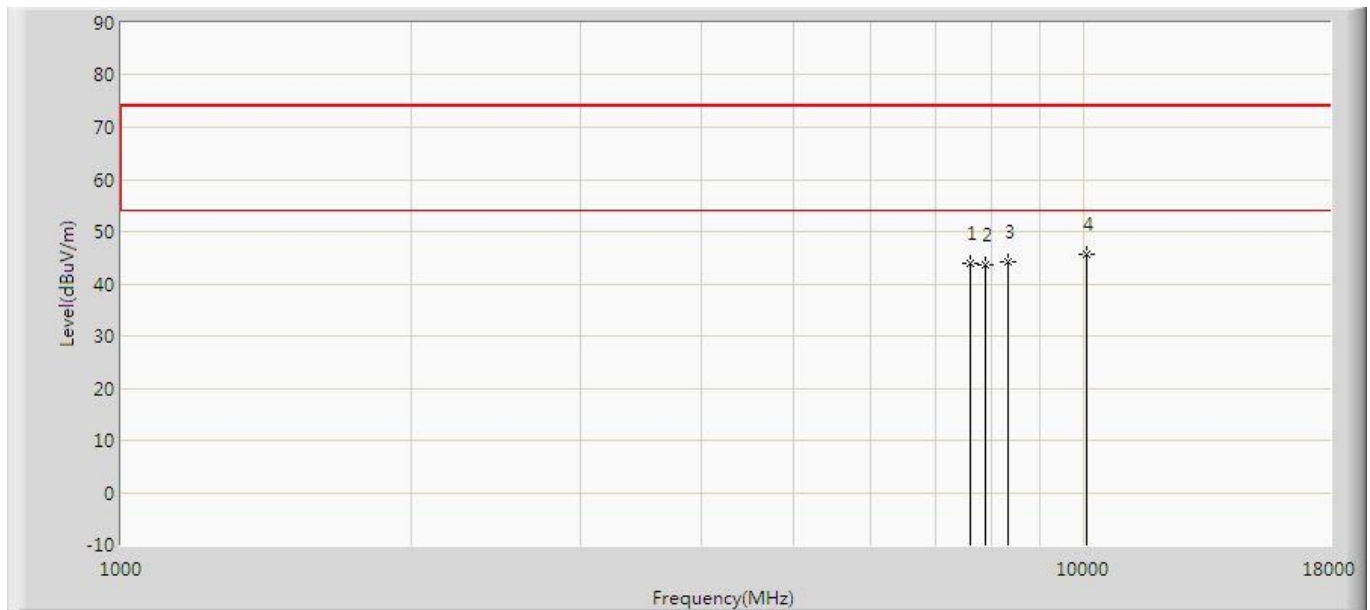


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7613.000	43.942	32.111	-30.058	74.000	11.831	PK
2			7910.500	43.669	31.530	-30.331	74.000	12.138	PK
3			8352.500	44.086	31.698	-29.914	74.000	12.388	PK
4		*	10078.000	45.679	30.167	-28.321	74.000	15.512	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

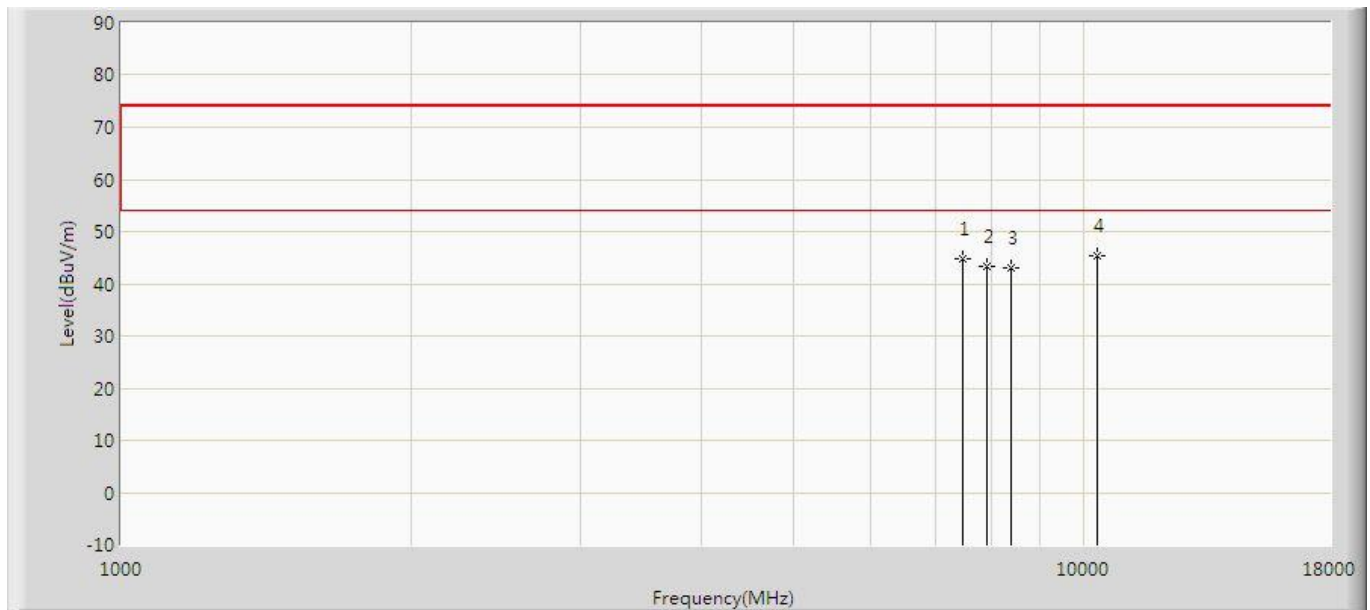


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	44.849	33.186	-29.151	74.000	11.663	PK
2			7936.000	43.405	31.241	-30.595	74.000	12.164	PK
3			8412.000	43.067	30.651	-30.933	74.000	12.416	PK
4		*	10316.000	45.232	28.954	-28.768	74.000	16.278	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

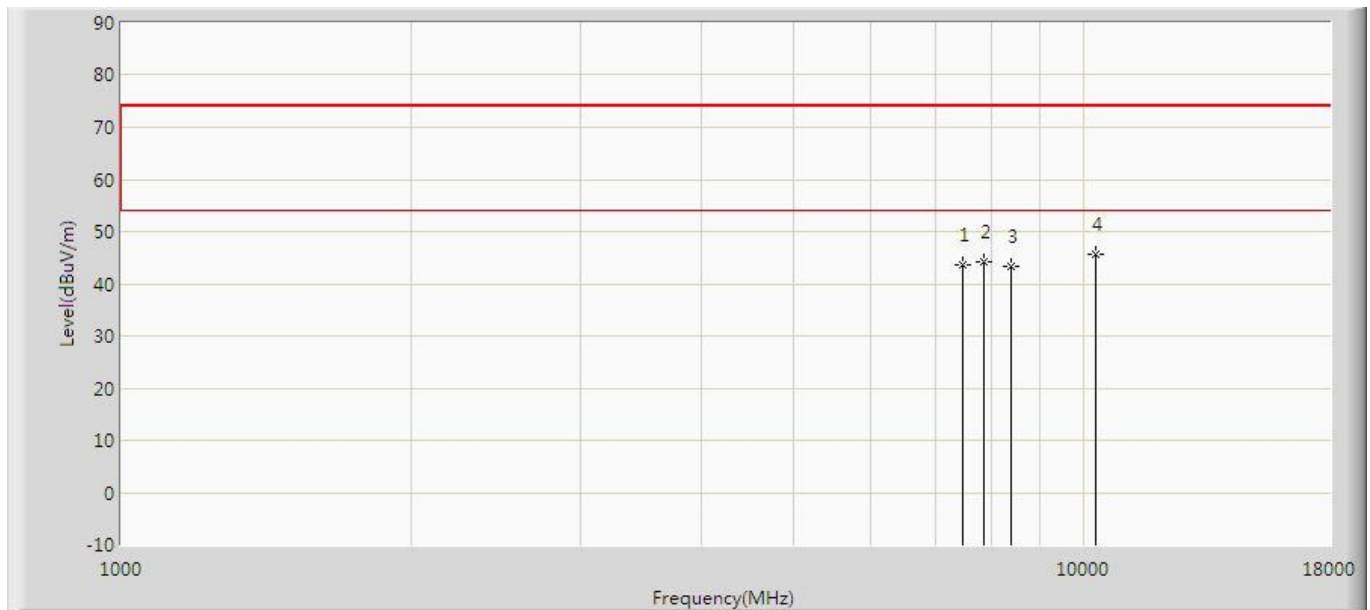


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	43.533	31.889	-30.467	74.000	11.644	PK
2			7876.500	44.122	32.019	-29.878	74.000	12.104	PK
3			8403.500	43.452	31.040	-30.548	74.000	12.412	PK
4		*	10265.000	45.698	29.585	-28.302	74.000	16.113	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz with OAW-AP1361D (Beam-Forming Mode)	

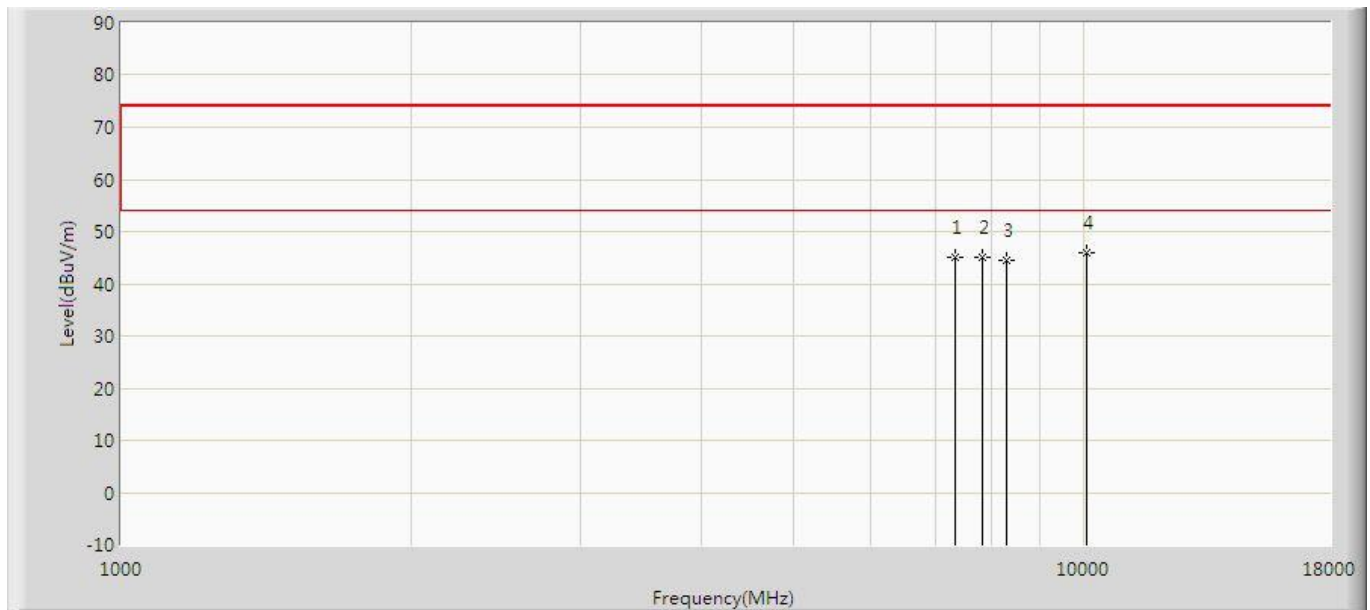


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7358.000	45.049	33.650	-28.951	74.000	11.399	PK
2			7851.000	45.044	32.968	-28.956	74.000	12.076	PK
3			8310.000	44.454	32.085	-29.546	74.000	12.369	PK
4		*	10078.000	46.013	30.501	-27.987	74.000	15.512	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz with OAW-AP1361D (Beam-Forming Mode)	

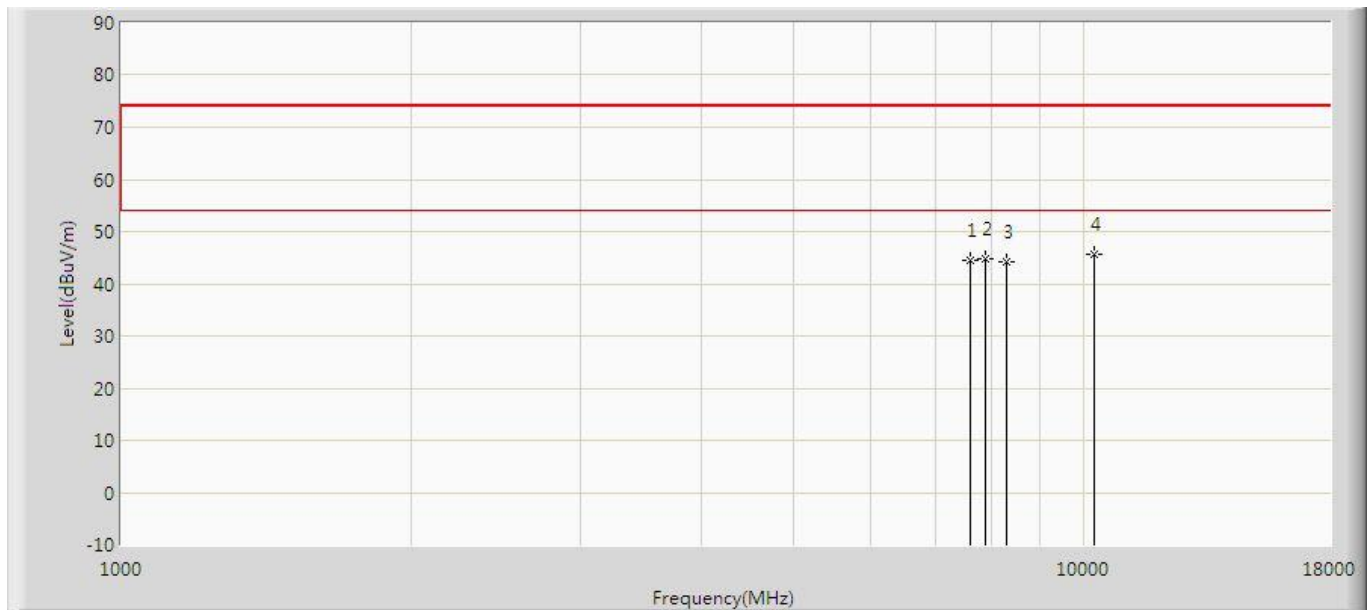


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7613.000	44.503	32.672	-29.497	74.000	11.831	PK
2			7910.500	44.876	32.737	-29.124	74.000	12.138	PK
3			8310.000	44.290	31.921	-29.710	74.000	12.369	PK
4		*	10231.000	45.565	29.561	-28.435	74.000	16.004	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

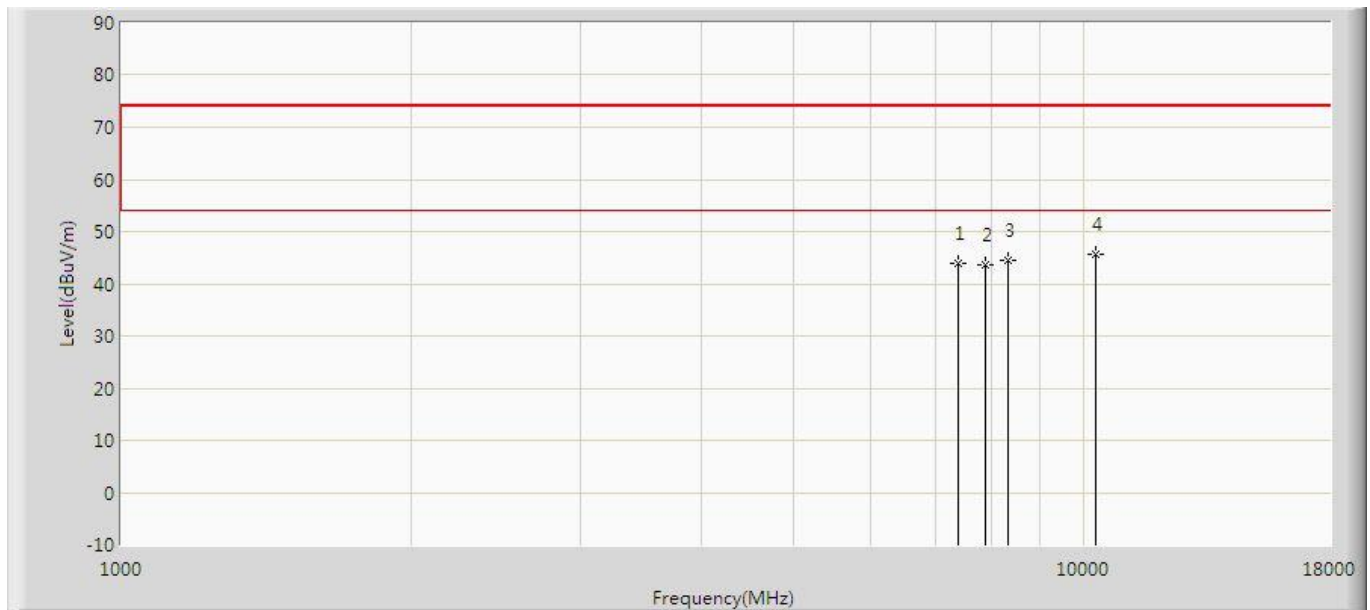


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	44.045	32.552	-29.955	74.000	11.493	PK
2			7910.500	43.623	31.484	-30.377	74.000	12.138	PK
3			8344.000	44.451	32.067	-29.549	74.000	12.384	PK
4		*	10265.000	45.714	29.601	-28.286	74.000	16.113	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

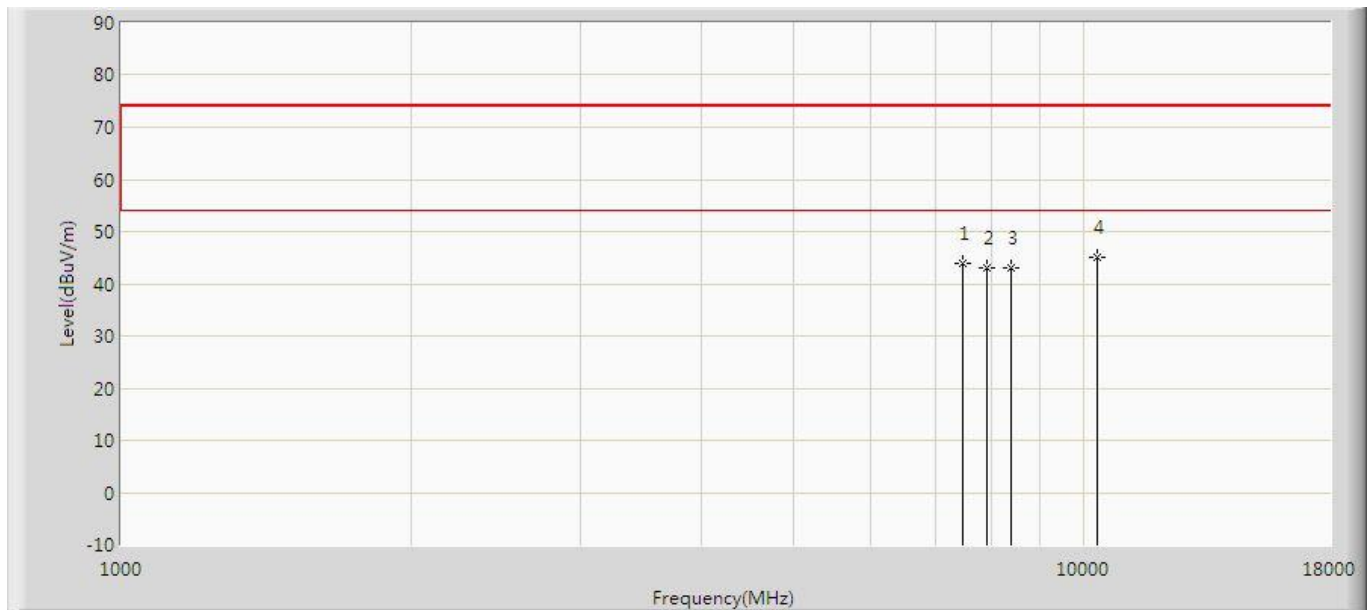


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	43.866	32.222	-30.134	74.000	11.644	PK
2			7927.500	43.095	30.939	-30.905	74.000	12.155	PK
3			8412.000	43.026	30.610	-30.974	74.000	12.416	PK
4		*	10307.500	45.214	28.963	-28.786	74.000	16.251	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

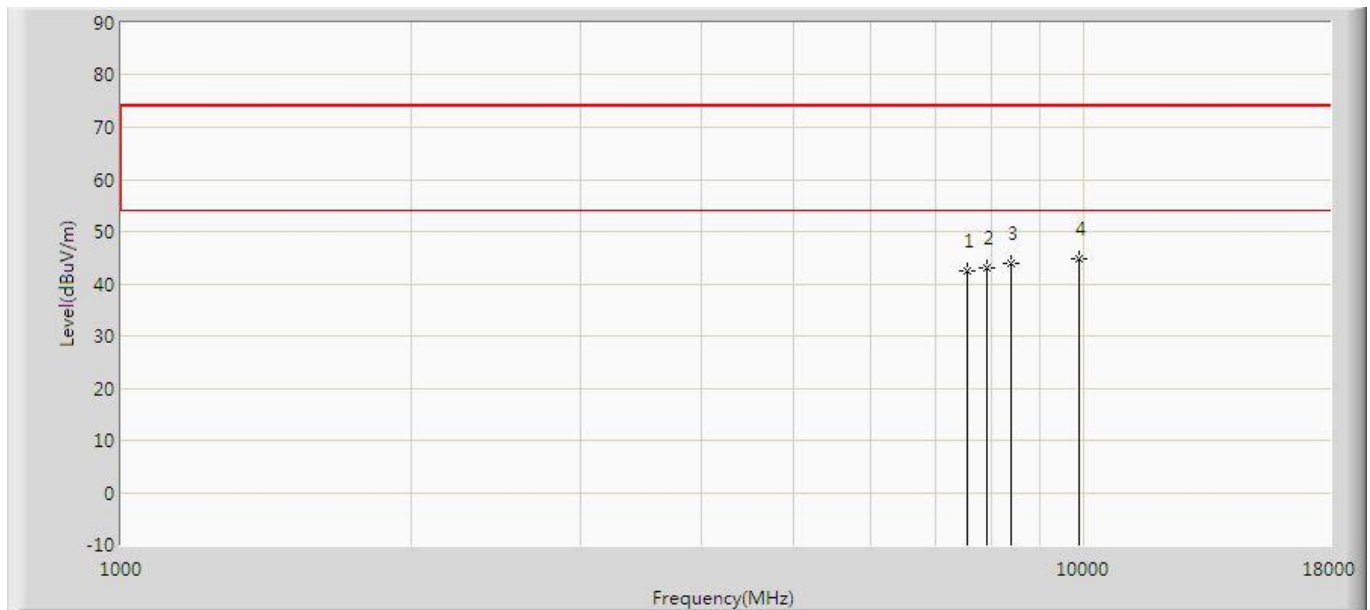


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7562.000	42.516	30.736	-31.484	74.000	11.780	PK
2			7919.000	43.031	30.884	-30.969	74.000	12.147	PK
3			8386.500	43.773	31.369	-30.227	74.000	12.404	PK
4		*	9874.000	44.877	30.031	-29.123	74.000	14.846	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

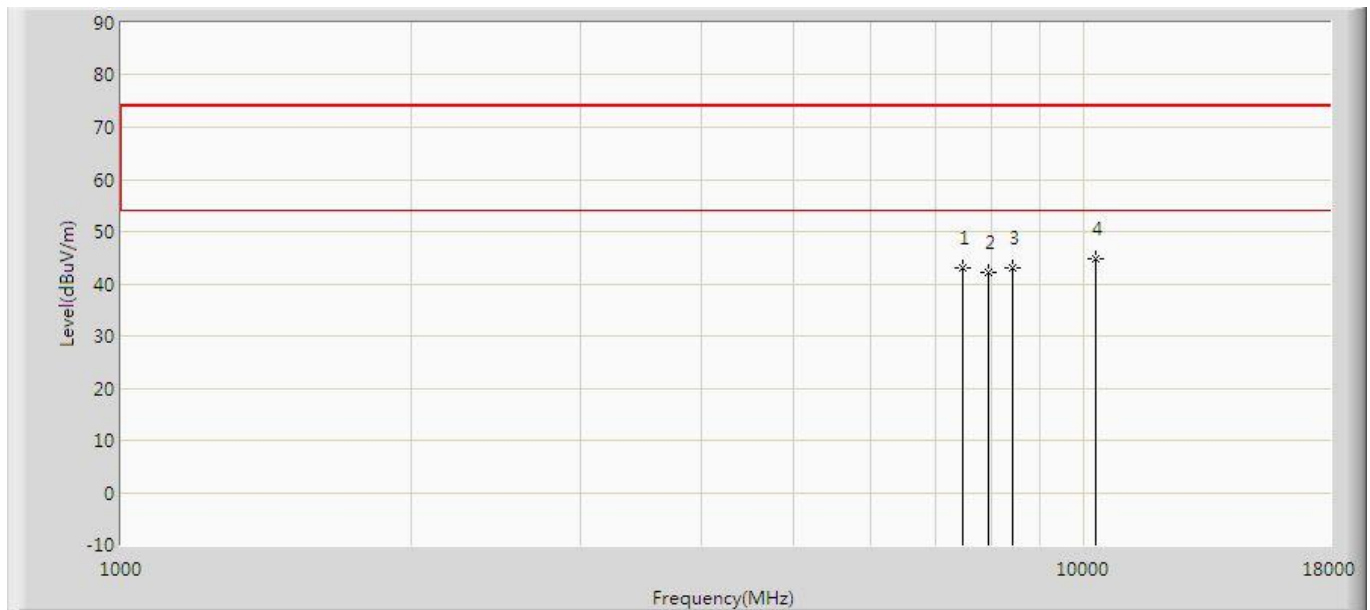


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	43.079	31.435	-30.921	74.000	11.644	PK
2			7953.000	42.179	29.998	-31.821	74.000	12.181	PK
3			8437.500	43.097	30.670	-30.903	74.000	12.427	PK
4		*	10273.500	44.920	28.780	-29.080	74.000	16.140	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz with OAW-AP1361D (Beam-Forming Mode)	

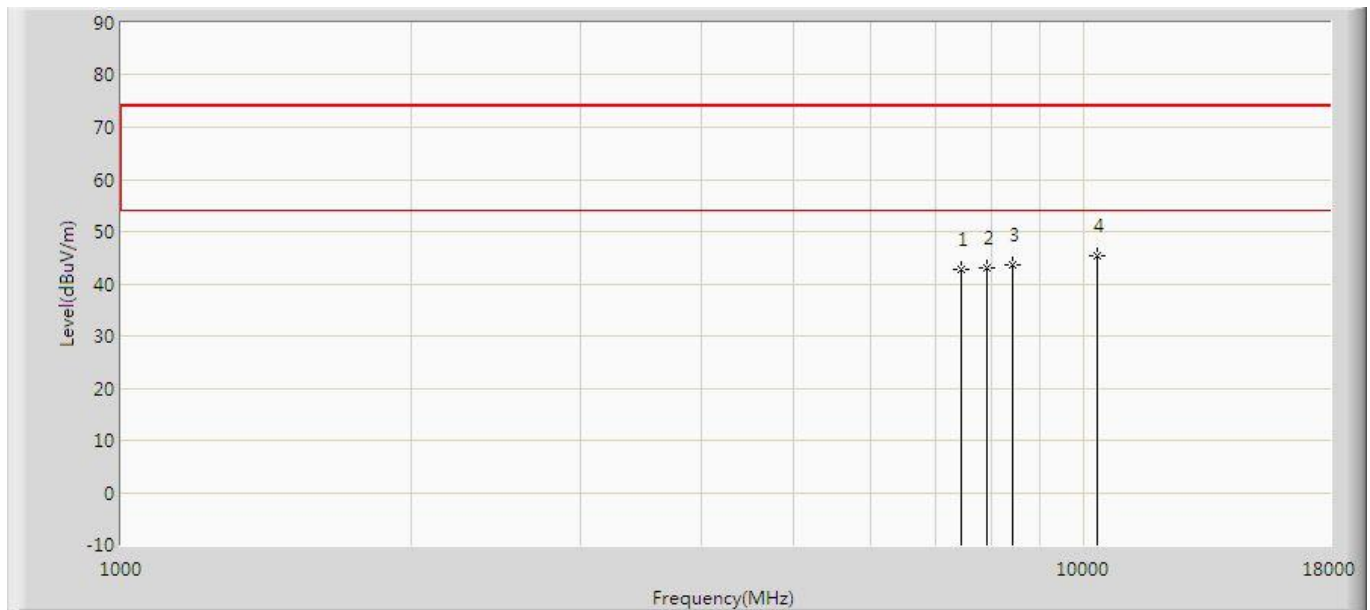


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7443.000	42.852	31.264	-31.148	74.000	11.588	PK
2			7919.000	43.020	30.873	-30.980	74.000	12.147	PK
3			8429.000	43.718	31.295	-30.282	74.000	12.423	PK
4		*	10307.500	45.373	29.122	-28.627	74.000	16.251	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz with OAW-AP1361D (Beam-Forming Mode)	

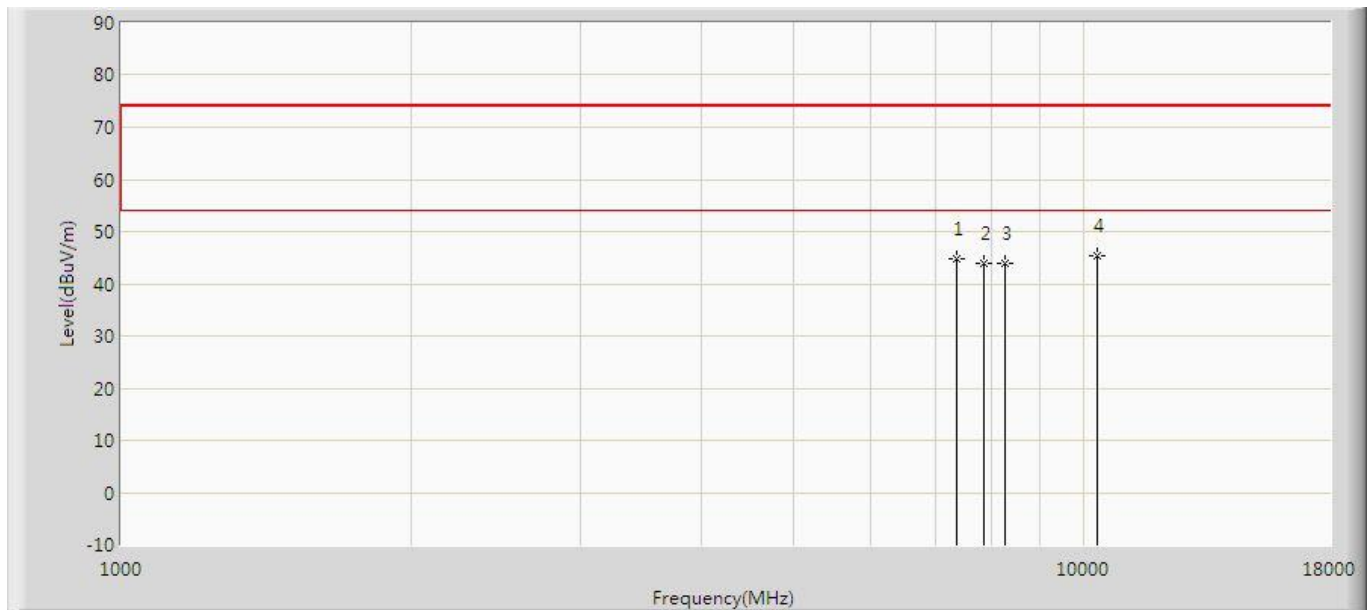


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7375.000	44.779	33.343	-29.221	74.000	11.436	PK
2			7876.500	44.032	31.929	-29.968	74.000	12.104	PK
3			8276.000	44.040	31.686	-29.960	74.000	12.354	PK
4		*	10316.000	45.276	28.998	-28.724	74.000	16.278	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

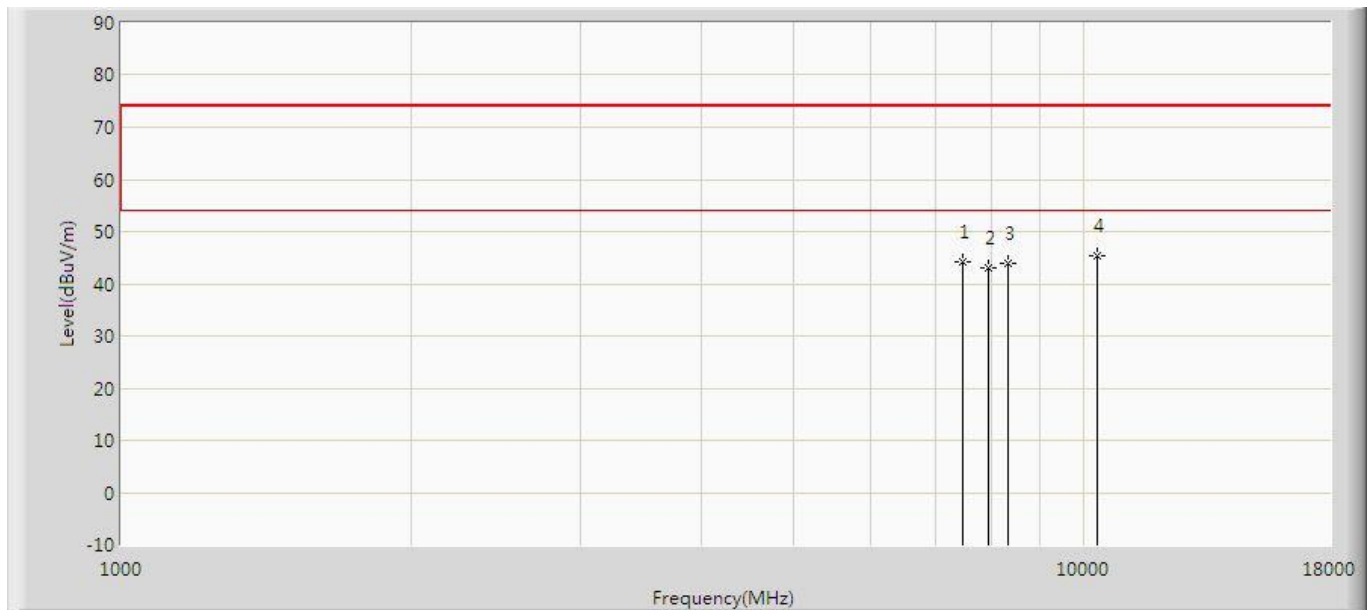


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	44.165	32.521	-29.835	74.000	11.644	PK
2			7944.500	43.096	30.923	-30.904	74.000	12.172	PK
3			8352.500	43.885	31.497	-30.115	74.000	12.388	PK
4		*	10307.500	45.395	29.144	-28.605	74.000	16.251	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

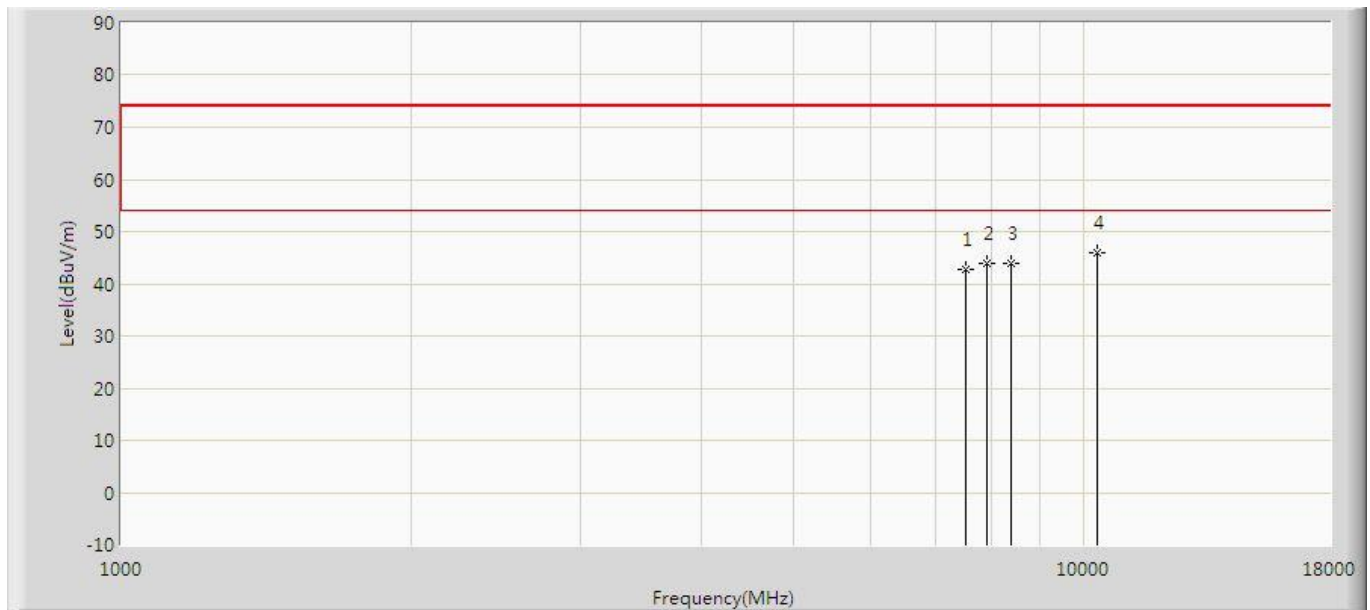


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	42.821	31.069	-31.179	74.000	11.752	PK
2			7919.000	43.810	31.663	-30.190	74.000	12.147	PK
3			8403.500	43.828	31.416	-30.172	74.000	12.412	PK
4		*	10307.500	45.955	29.704	-28.045	74.000	16.251	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

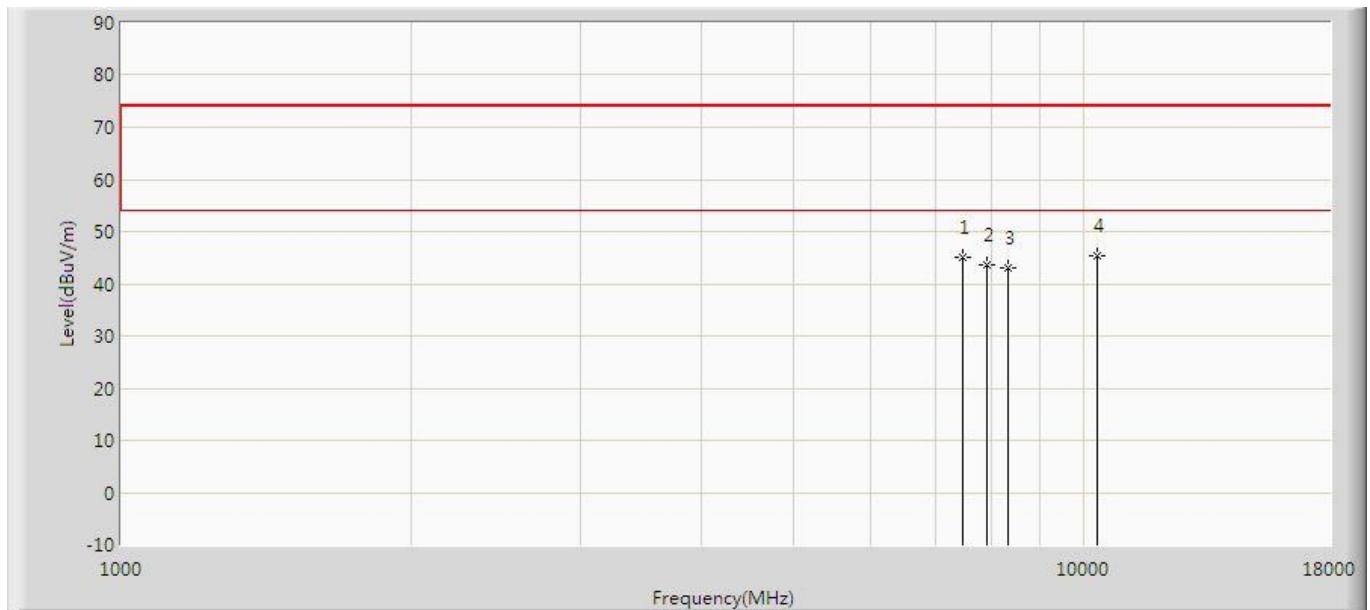


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	45.008	33.364	-28.992	74.000	11.644	PK
2			7927.500	43.572	31.416	-30.428	74.000	12.155	PK
3			8327.000	43.116	30.739	-30.884	74.000	12.377	PK
4		*	10307.500	45.226	28.975	-28.774	74.000	16.251	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

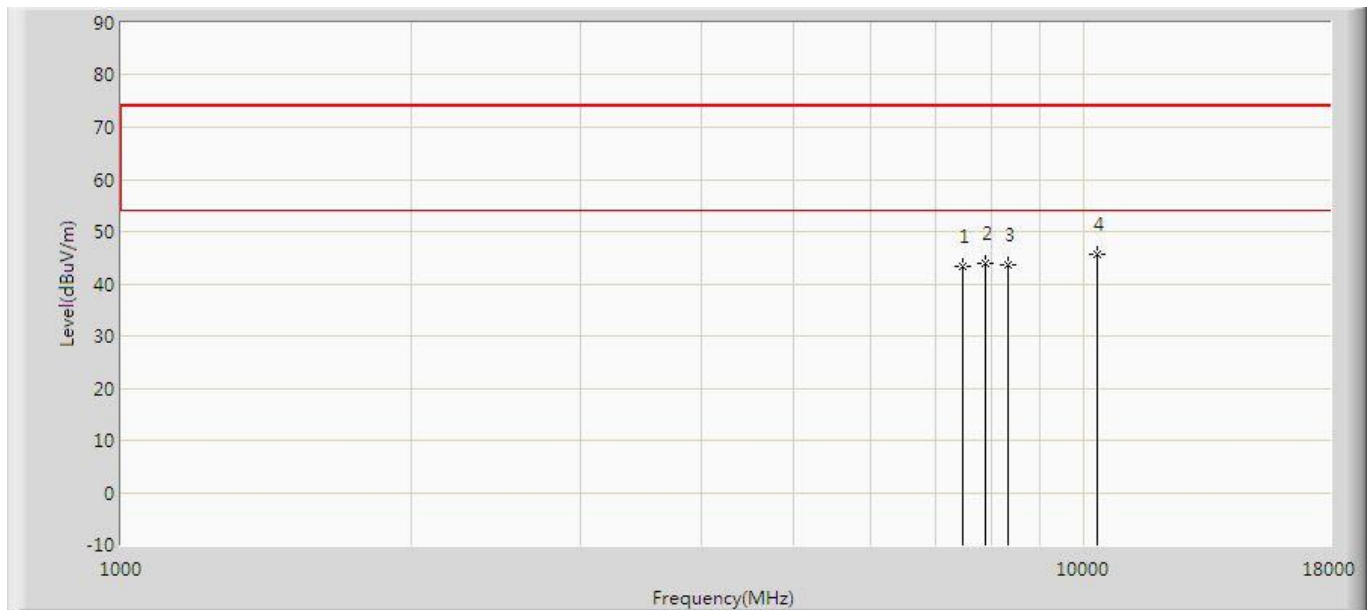


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	43.377	31.733	-30.623	74.000	11.644	PK
2			7902.000	44.055	31.925	-29.945	74.000	12.130	PK
3			8327.000	43.766	31.389	-30.234	74.000	12.377	PK
4		*	10307.500	45.684	29.433	-28.316	74.000	16.251	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz with OAW-AP1361D (Beam-Forming Mode)	

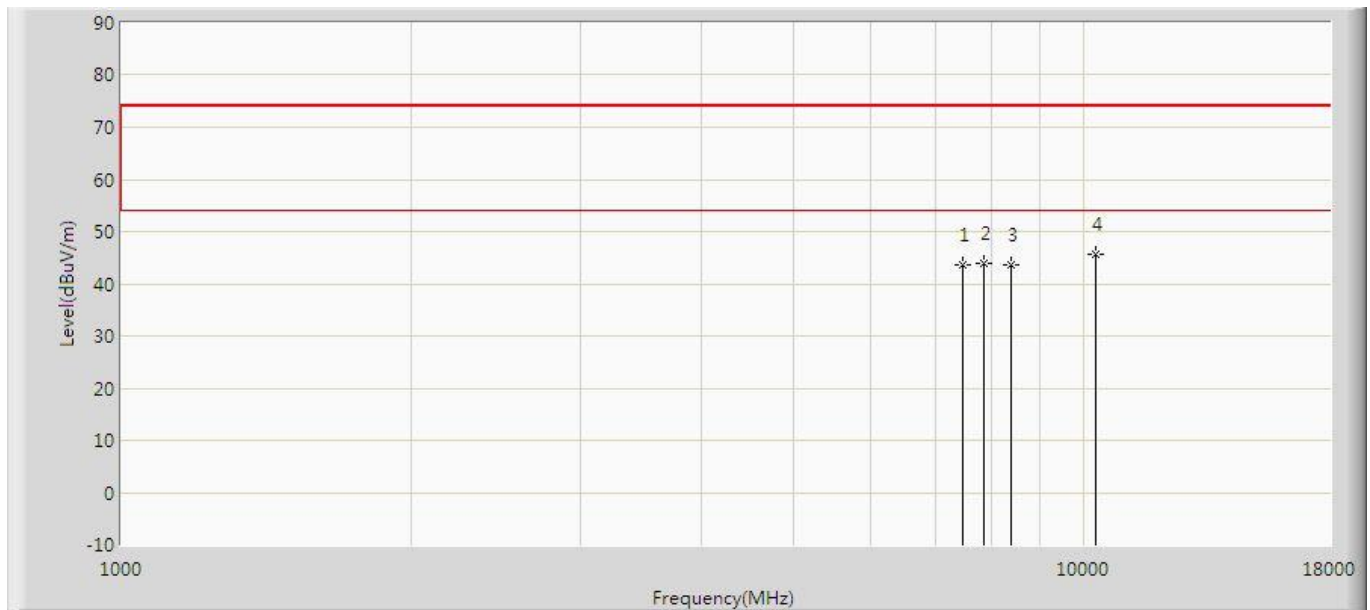


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	43.618	31.974	-30.382	74.000	11.644	PK
2			7876.500	44.042	31.939	-29.958	74.000	12.104	PK
3			8403.500	43.546	31.134	-30.454	74.000	12.412	PK
4		*	10265.000	45.723	29.610	-28.277	74.000	16.113	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz with OAW-AP1361D (Beam-Forming Mode)	

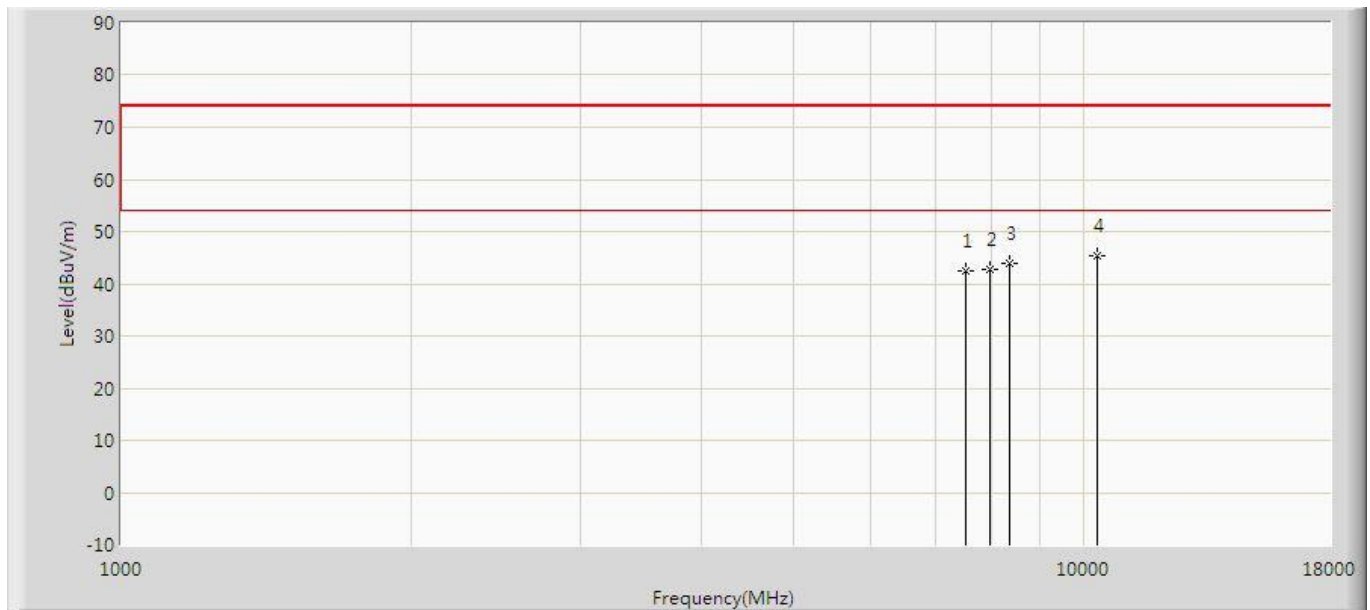


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	42.501	30.749	-31.499	74.000	11.752	PK
2			7970.000	42.791	30.592	-31.209	74.000	12.199	PK
3			8361.000	43.888	31.496	-30.112	74.000	12.392	PK
4		*	10316.000	45.317	29.039	-28.683	74.000	16.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

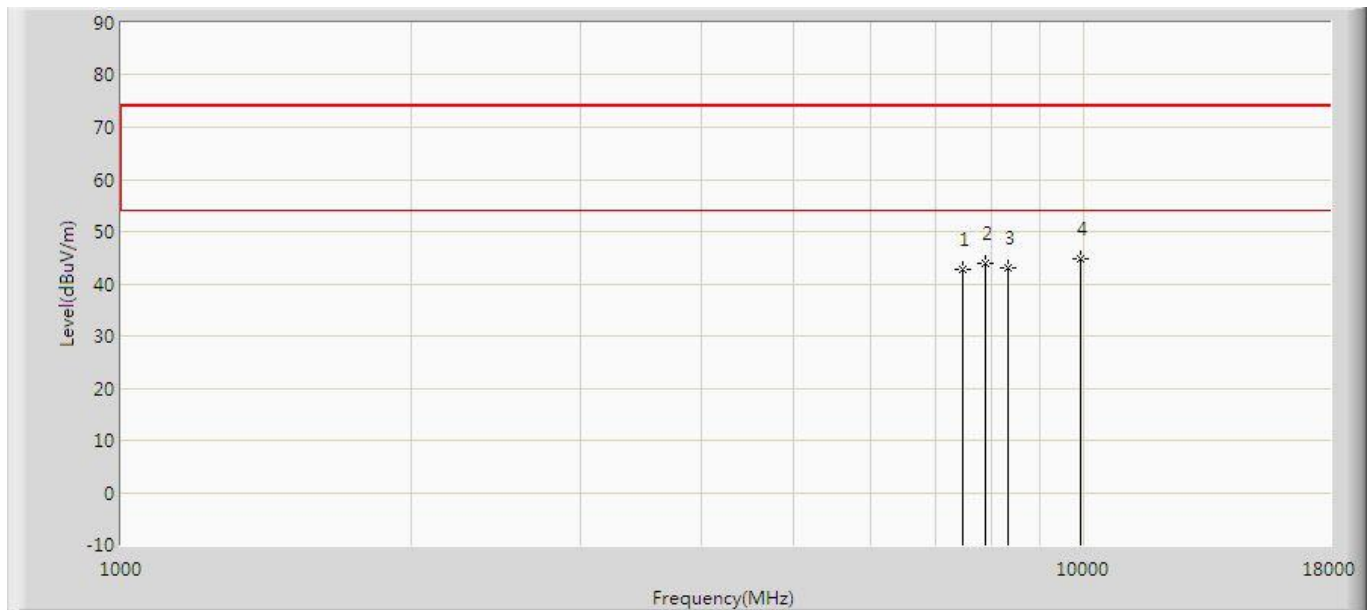


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	42.808	31.145	-31.192	74.000	11.663	PK
2			7910.500	43.855	31.716	-30.145	74.000	12.138	PK
3			8352.500	43.070	30.682	-30.930	74.000	12.388	PK
4		*	9908.000	44.740	29.781	-29.260	74.000	14.959	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

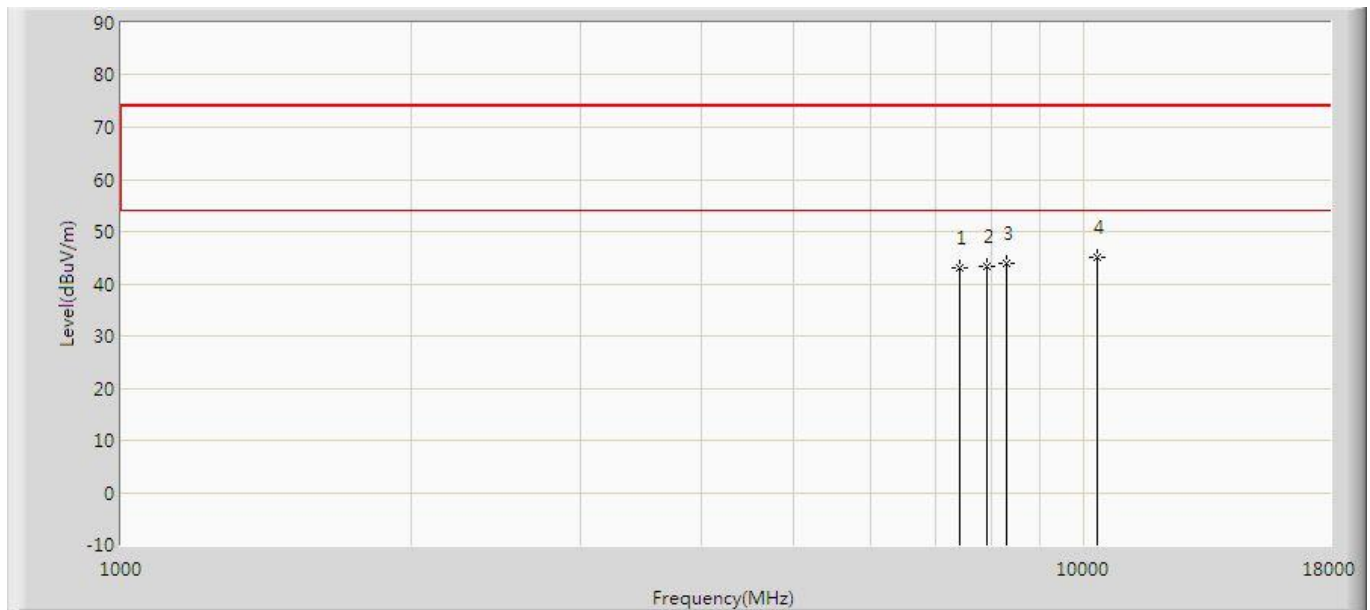


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7426.000	43.130	31.581	-30.870	74.000	11.549	PK
2			7927.500	43.310	31.154	-30.690	74.000	12.155	PK
3			8318.500	43.948	31.575	-30.052	74.000	12.373	PK
4		*	10307.500	45.081	28.830	-28.919	74.000	16.251	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channnel 2412MHz with OAW-AP1361D - Scan Antenna	

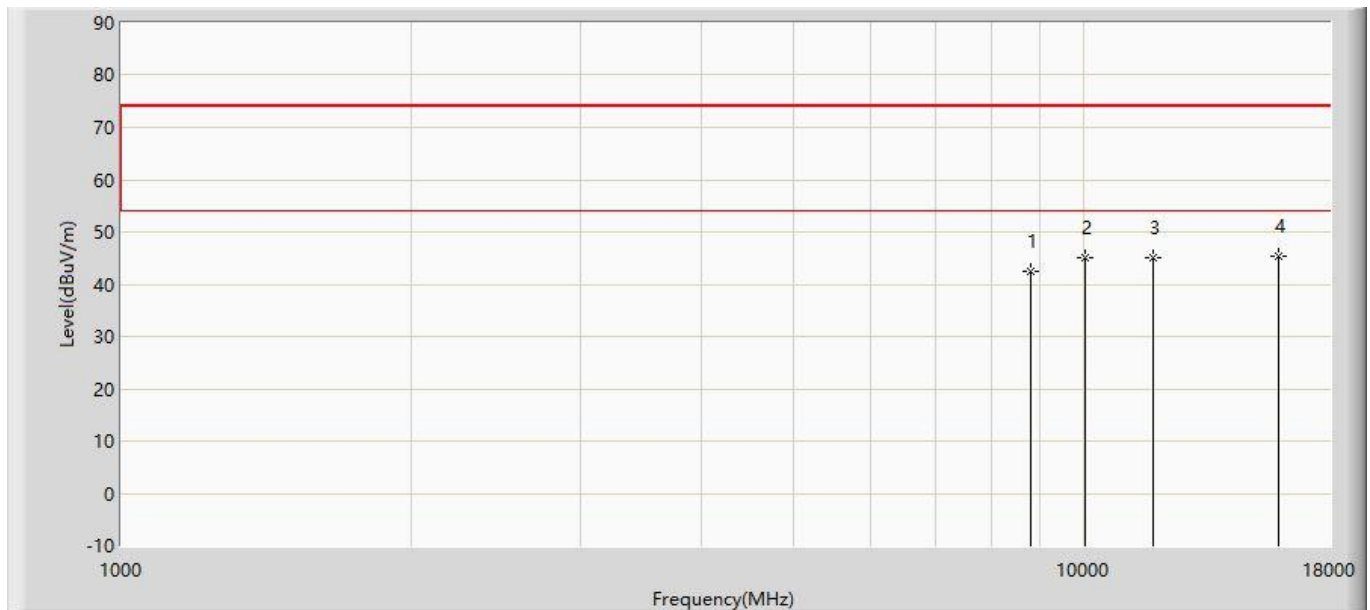


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8803.000	42.547	29.290	-31.453	74.000	13.257	PK
2			10035.500	45.060	29.686	-28.940	74.000	15.374	PK
3			11786.500	45.050	27.131	-28.950	74.000	17.918	PK
4		*	15917.500	45.345	24.762	-28.655	74.000	20.583	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channnel 2412MHz with OAW-AP1361D - Scan Antenna	

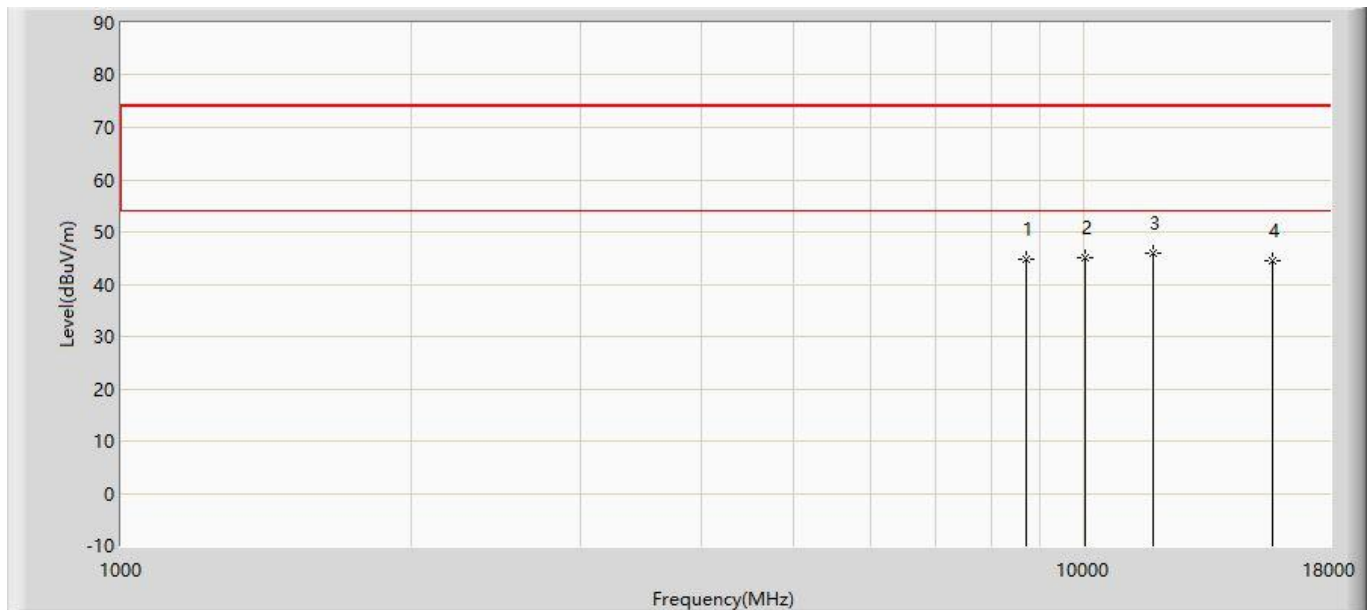


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8709.500	44.652	31.643	-29.348	74.000	13.009	PK
2			10027.000	45.139	29.792	-28.861	74.000	15.347	PK
3		*	11786.500	46.007	28.088	-27.993	74.000	17.918	PK
4			15688.000	44.456	23.671	-29.544	74.000	20.785	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channnel 2437MHz with OAW-AP1361D - Scan Antenna	

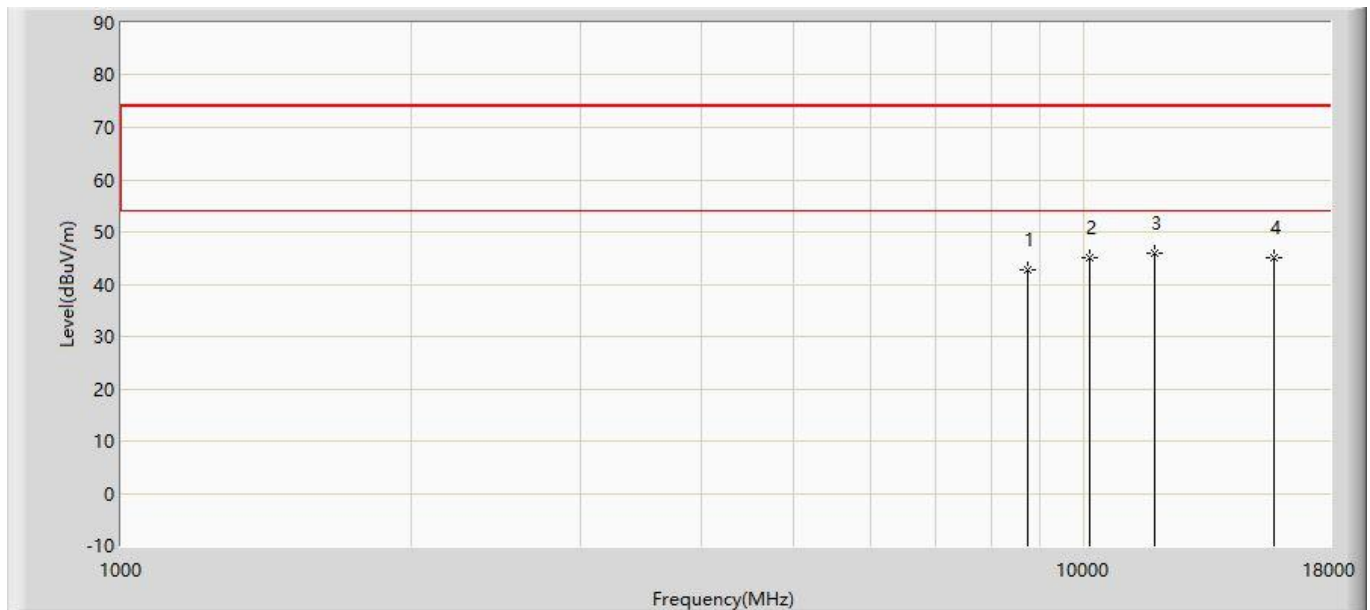


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8735.000	42.879	29.801	-31.121	74.000	13.078	PK
2			10120.500	45.099	29.451	-28.901	74.000	15.648	PK
3		*	11846.000	46.010	28.119	-27.990	74.000	17.891	PK
4			15773.000	45.084	24.374	-28.916	74.000	20.710	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channnel 2437MHz with OAW-AP1361D - Scan Antenna	

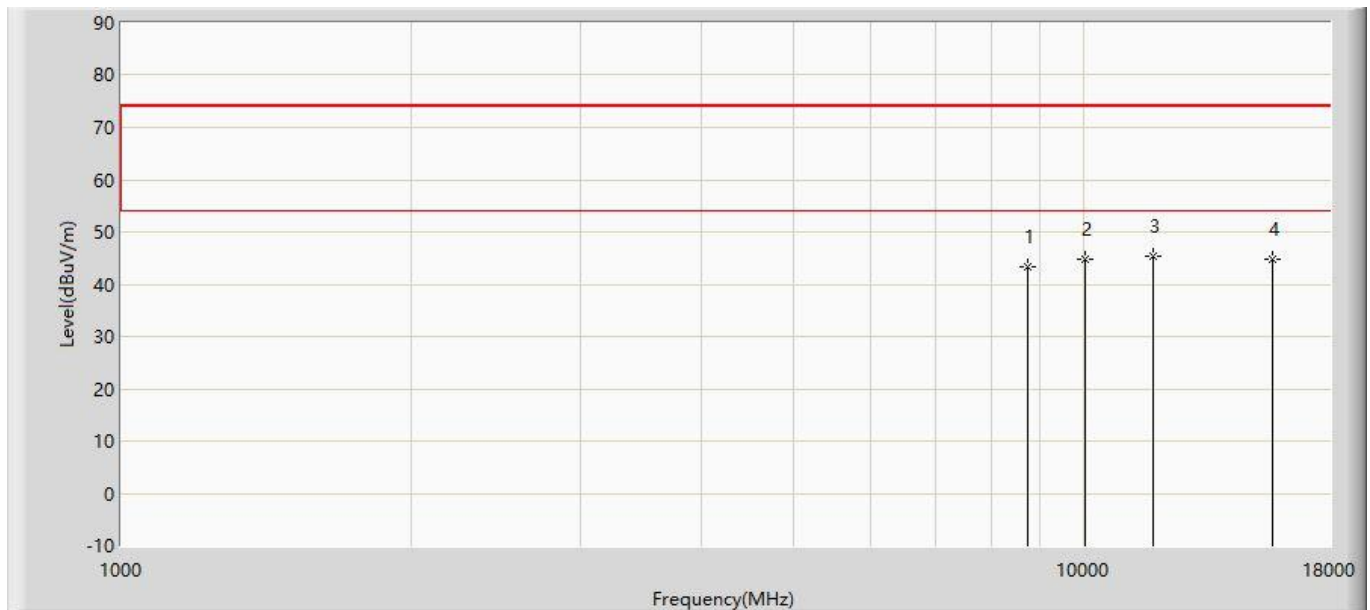


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8735.000	43.366	30.288	-30.634	74.000	13.078	PK
2			10010.000	44.668	29.376	-29.332	74.000	15.292	PK
3		*	11812.000	45.288	27.382	-28.712	74.000	17.906	PK
4			15705.000	44.882	24.113	-29.118	74.000	20.769	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channnel 2462MHz with OAW-AP1361D - Scan Antenna	

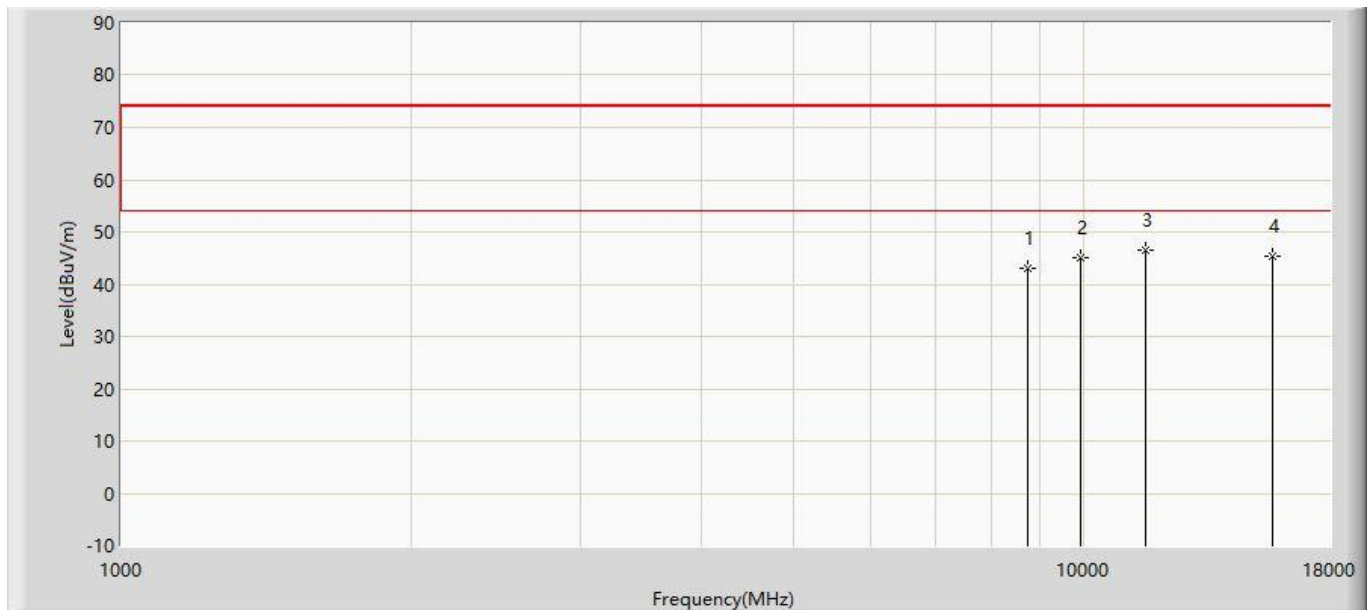


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8735.000	42.907	29.829	-31.093	74.000	13.078	PK
2			9899.500	45.049	30.118	-28.951	74.000	14.931	PK
3		*	11582.500	46.426	28.414	-27.574	74.000	18.012	PK
4			15705.000	45.458	24.689	-28.542	74.000	20.769	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channnel 2462MHz with OAW-AP1361D - Scan Antenna	

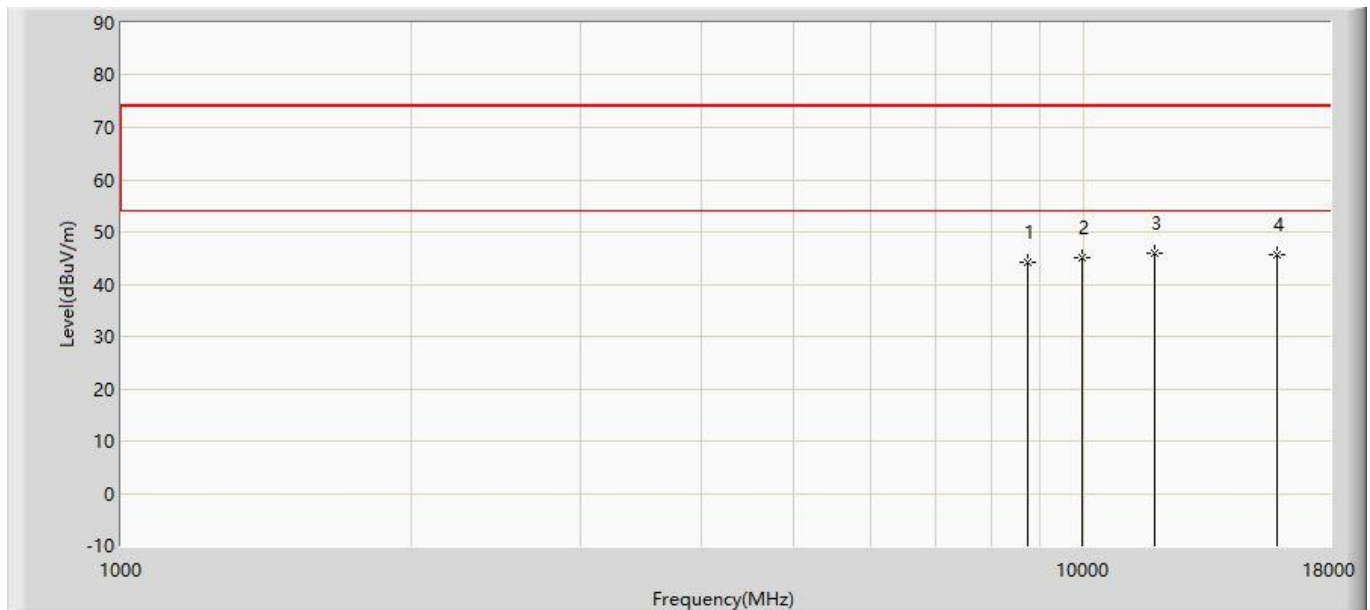


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8735.000	44.173	31.095	-29.827	74.000	13.078	PK
2			9942.000	44.934	29.865	-29.066	74.000	15.069	PK
3		*	11846.000	46.086	28.195	-27.914	74.000	17.891	PK
4			15849.500	45.708	25.066	-28.292	74.000	20.642	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channnel 2412MHz with OAW-AP1361D - Scan Antenna	

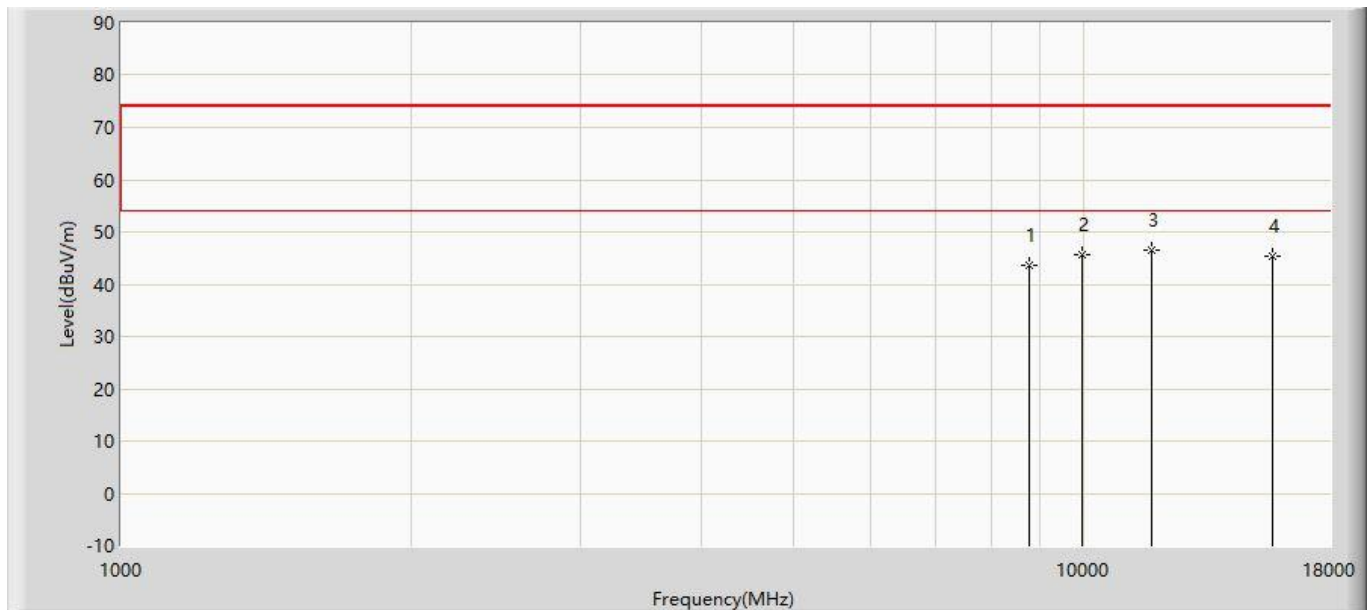


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8769.000	43.497	30.329	-30.503	74.000	13.168	PK
2			9942.000	45.640	30.571	-28.360	74.000	15.069	PK
3		*	11735.500	46.389	28.448	-27.611	74.000	17.941	PK
4			15705.000	45.330	24.561	-28.670	74.000	20.769	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channnel 2412MHz with OAW-AP1361D - Scan Antenna	

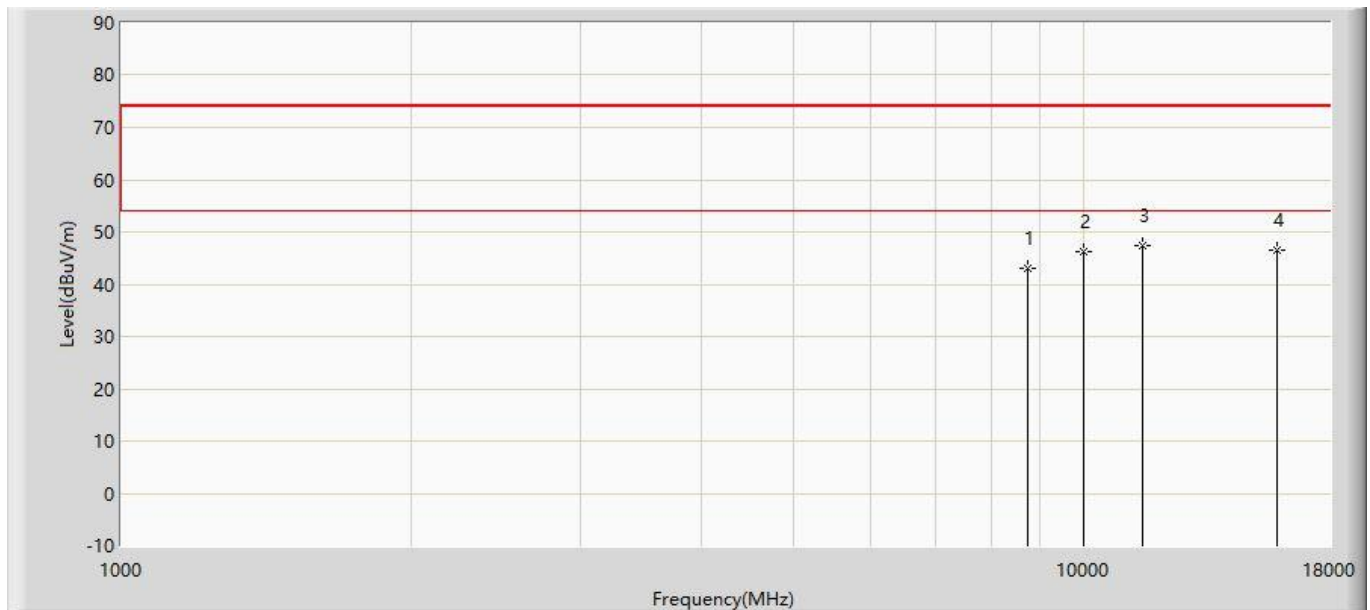


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8735.000	42.925	29.847	-31.075	74.000	13.078	PK
2			9993.000	46.258	31.020	-27.742	74.000	15.238	PK
3		*	11480.500	47.483	29.451	-26.517	74.000	18.031	PK
4			15849.500	46.509	25.867	-27.491	74.000	20.642	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channnel 2437MHz with OAW-AP1361D - Scan Antenna	

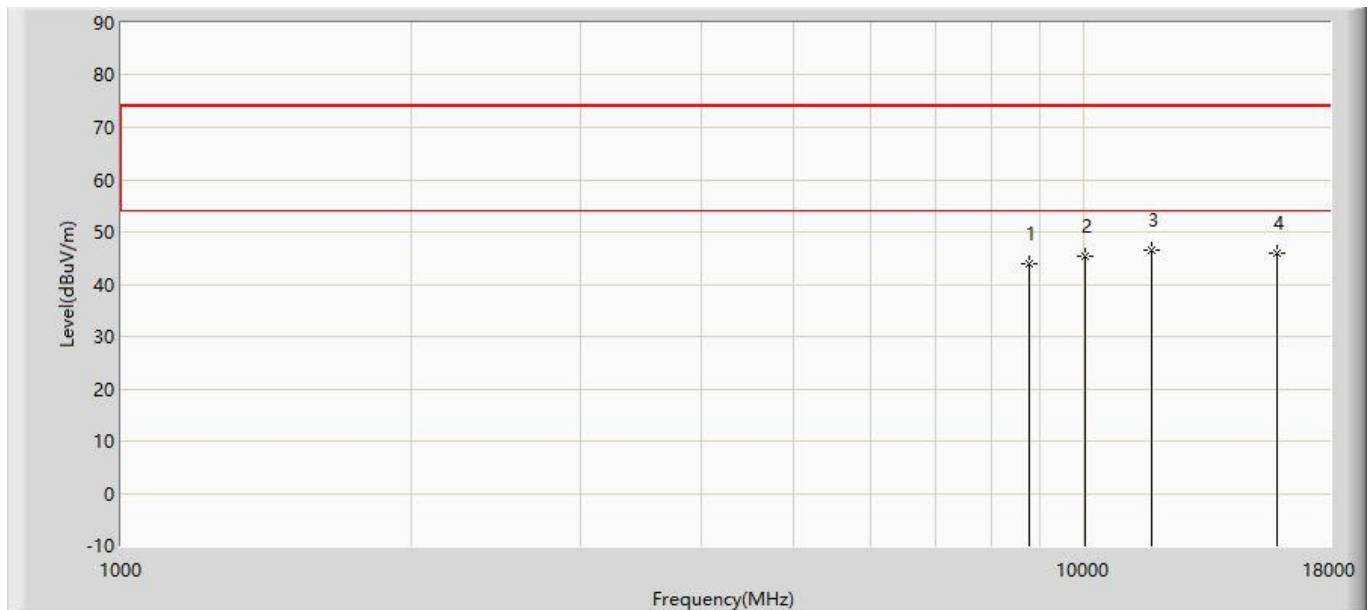


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8769.000	43.929	30.761	-30.071	74.000	13.168	PK
2			10035.500	45.264	29.890	-28.736	74.000	15.374	PK
3		*	11735.500	46.642	28.701	-27.358	74.000	17.941	PK
4			15849.500	46.030	25.388	-27.970	74.000	20.642	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channnel 2437MHz with OAW-AP1361D - Scan Antenna	

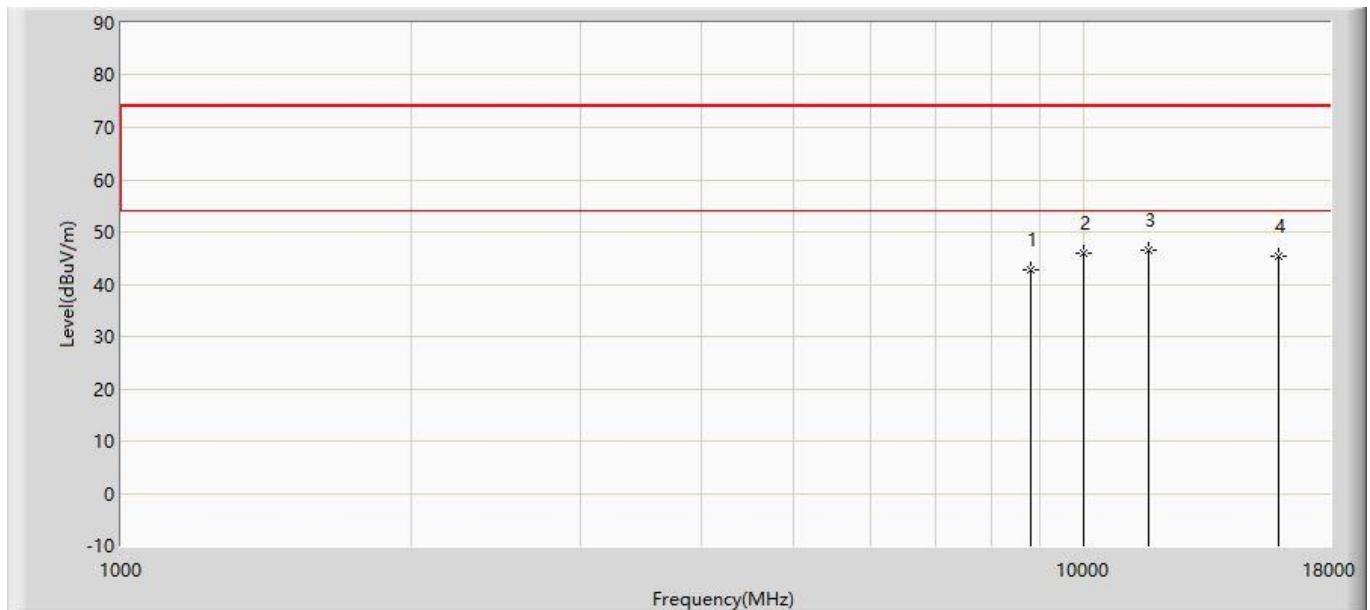


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8811.500	42.702	29.422	-31.298	74.000	13.280	PK
2			9993.000	45.942	30.704	-28.058	74.000	15.238	PK
3		*	11684.500	46.519	28.554	-27.481	74.000	17.964	PK
4			15917.500	45.327	24.744	-28.673	74.000	20.583	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channnel 2462MHz with OAW-AP1361D - Scan Antenna	

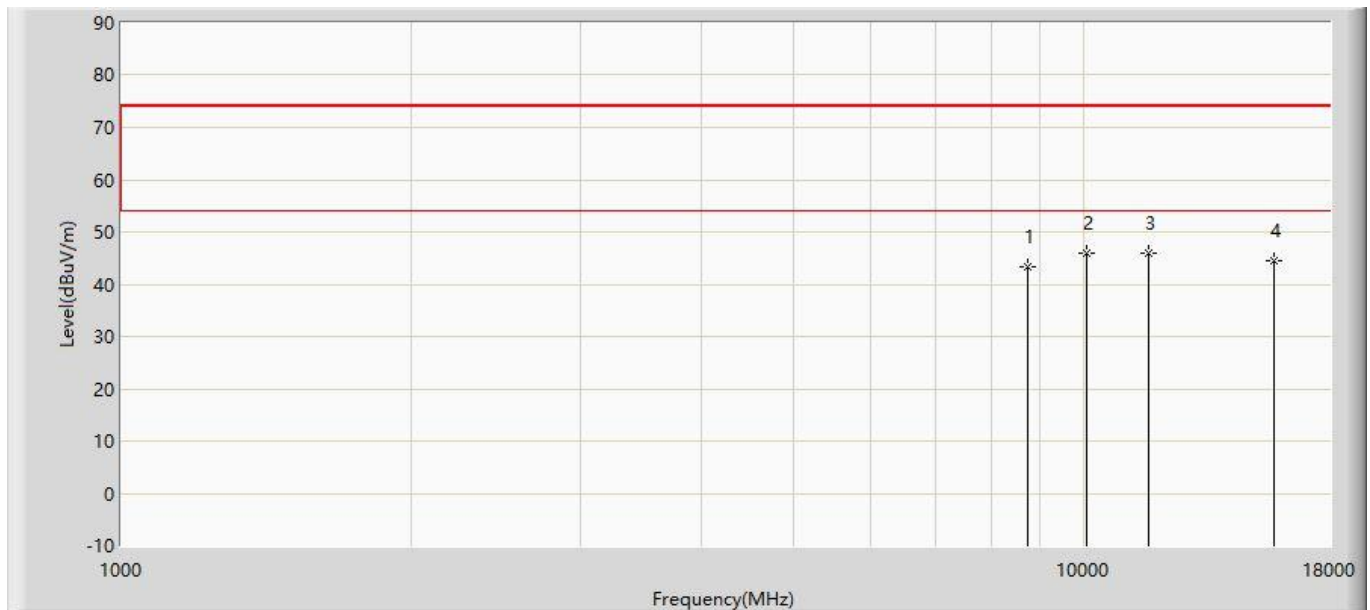


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8735.000	43.228	30.150	-30.772	74.000	13.078	PK
2		*	10078.000	45.830	30.318	-28.170	74.000	15.512	PK
3			11684.500	45.823	27.858	-28.177	74.000	17.964	PK
4			15773.000	44.563	23.853	-29.437	74.000	20.710	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channnel 2462MHz with OAW-AP1361D - Scan Antenna	

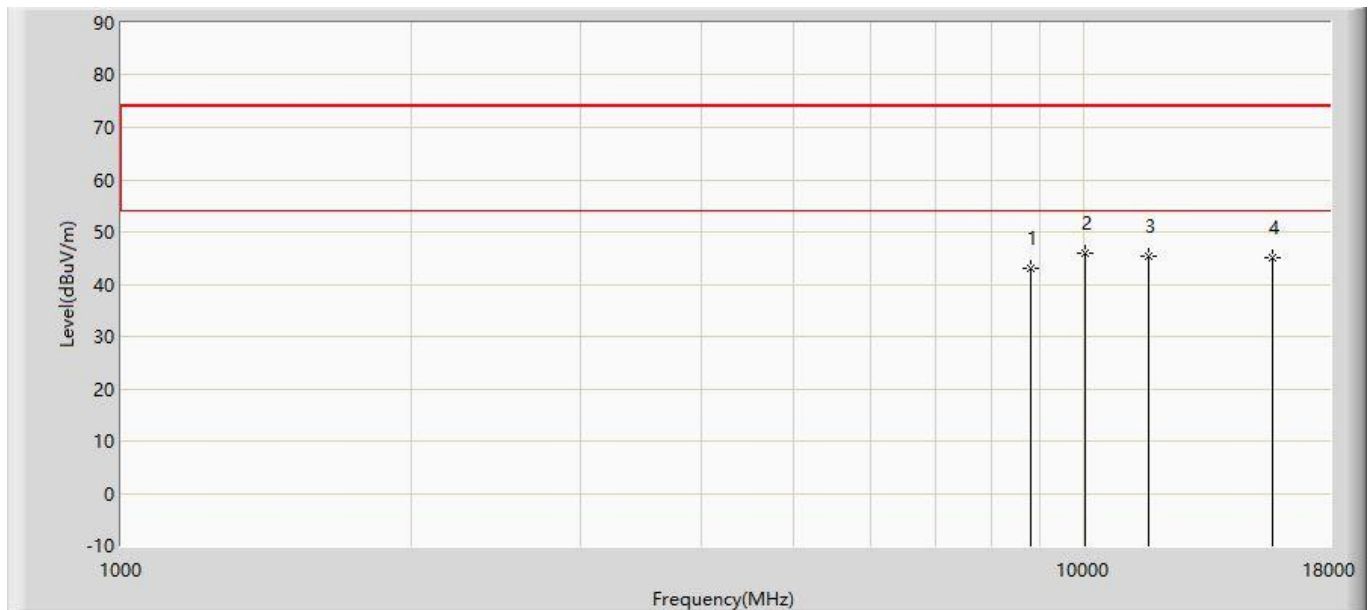


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8811.500	42.961	29.681	-31.039	74.000	13.280	PK
2		*	10035.500	46.026	30.652	-27.974	74.000	15.374	PK
3			11684.500	45.222	27.257	-28.778	74.000	17.964	PK
4			15705.000	45.150	24.381	-28.850	74.000	20.769	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Mode No.: OAW-AP1362

Site: AC1	Time: 2020/04/22 - 11:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

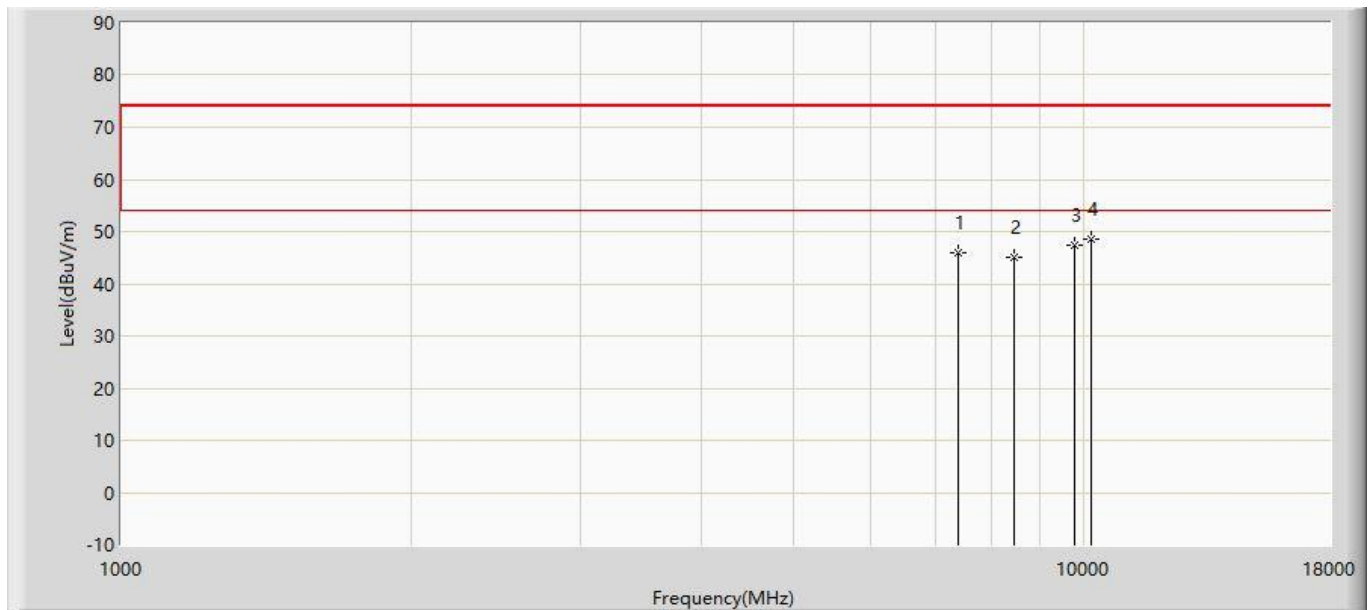


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	45.812	34.319	-28.188	74.000	11.493	PK
2			8446.000	45.215	32.784	-28.785	74.000	12.431	PK
3			9763.500	47.396	32.912	-26.604	74.000	14.485	PK
4		*	10163.000	48.417	32.632	-25.583	74.000	15.785	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

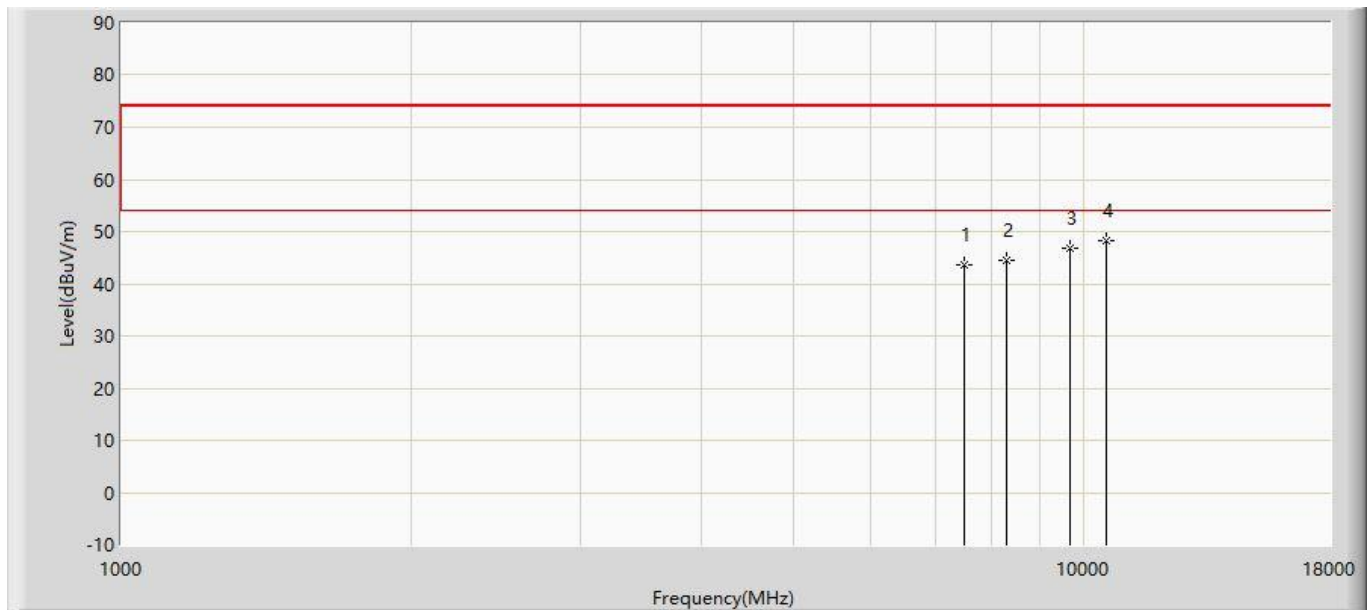


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	43.504	31.790	-30.496	74.000	11.714	PK
2			8318.500	44.473	32.100	-29.527	74.000	12.373	PK
3			9653.000	46.897	32.775	-27.103	74.000	14.122	PK
4		*	10528.500	48.313	31.402	-25.687	74.000	16.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2437MHz with OAW-AP1362 (CDD Mode)	

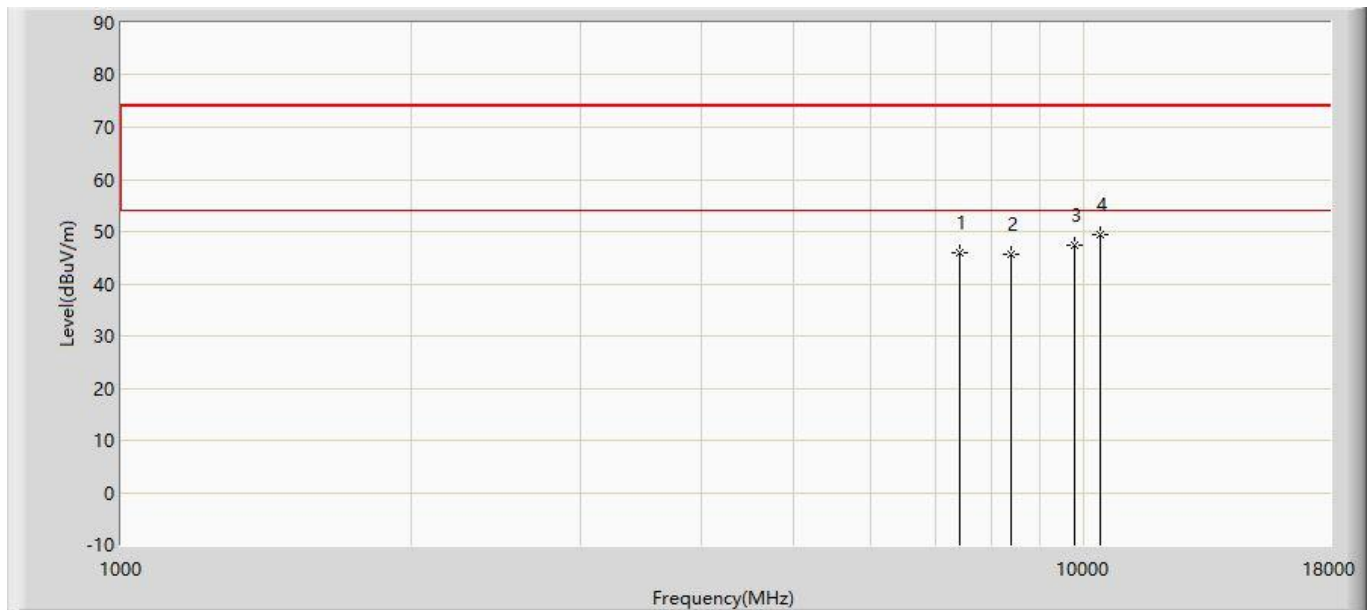


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7426.000	45.963	34.414	-28.037	74.000	11.549	PK
2			8386.500	45.529	33.125	-28.471	74.000	12.404	PK
3			9772.000	47.297	32.785	-26.703	74.000	14.512	PK
4		*	10401.000	49.308	32.757	-24.692	74.000	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2437MHz with OAW-AP1362 (CDD Mode)	

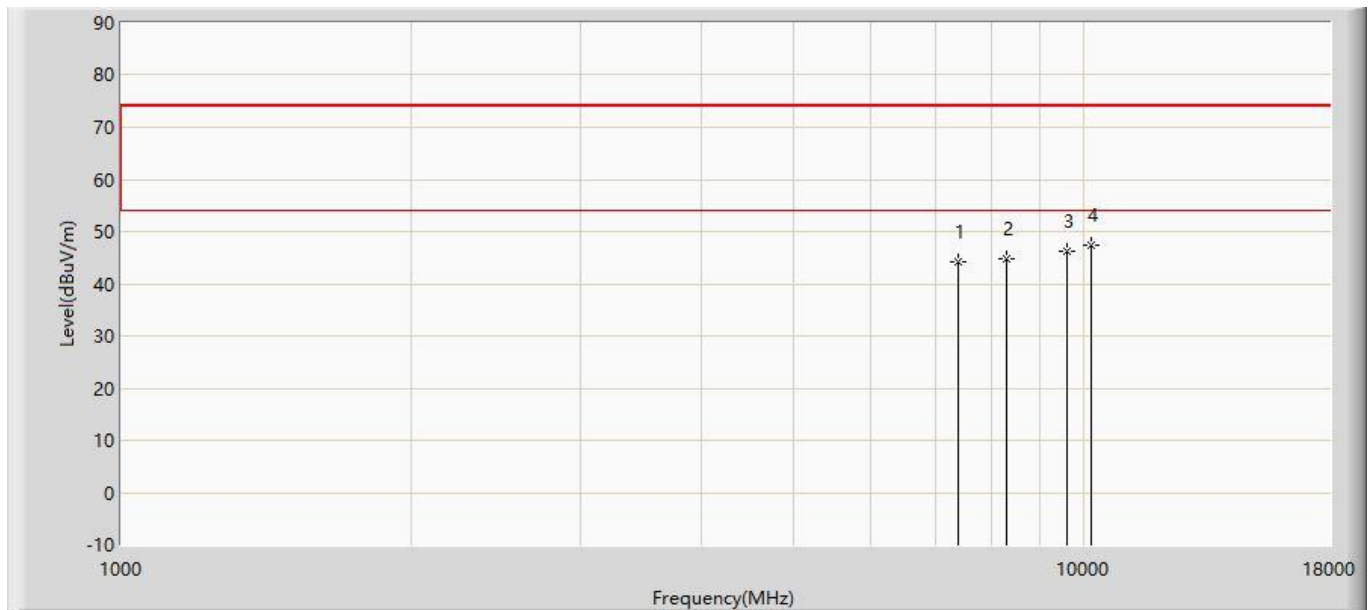


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	44.224	32.712	-29.776	74.000	11.512	PK
2			8310.000	44.802	32.433	-29.198	74.000	12.369	PK
3			9602.000	46.376	32.422	-27.624	74.000	13.954	PK
4		*	10163.000	47.458	31.673	-26.542	74.000	15.785	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

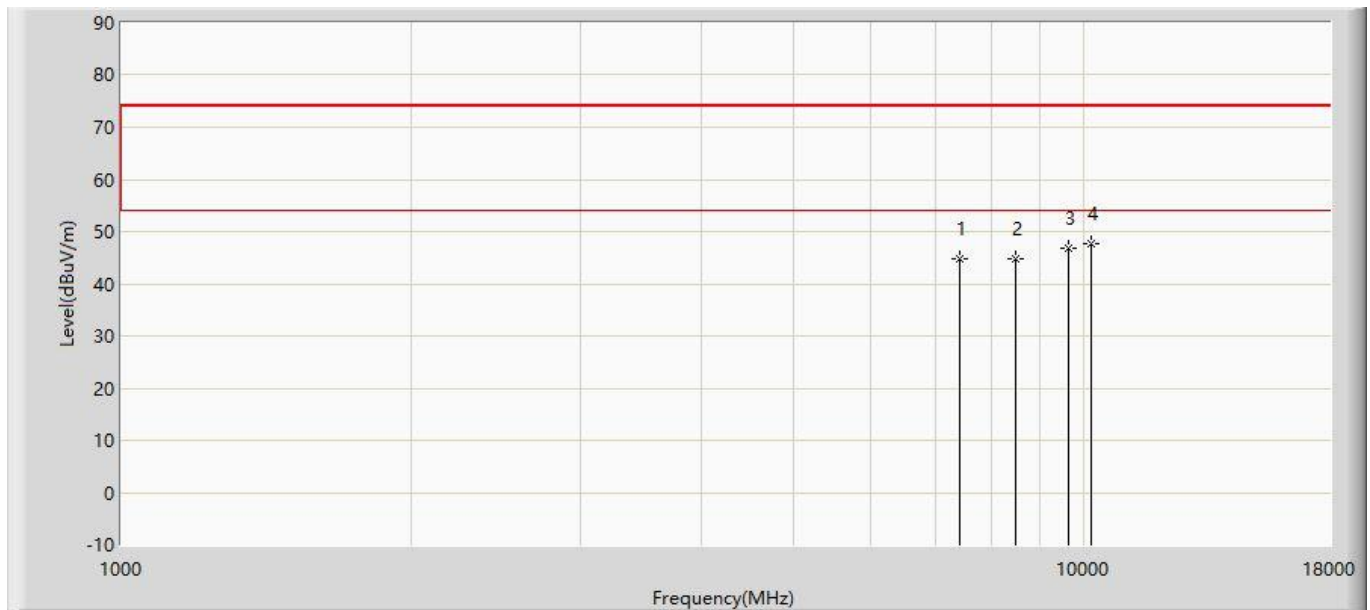


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7426.000	44.885	33.336	-29.115	74.000	11.549	PK
2			8488.500	44.889	32.439	-29.111	74.000	12.450	PK
3			9619.000	46.868	32.858	-27.132	74.000	14.010	PK
4		*	10163.000	47.690	31.905	-26.310	74.000	15.785	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

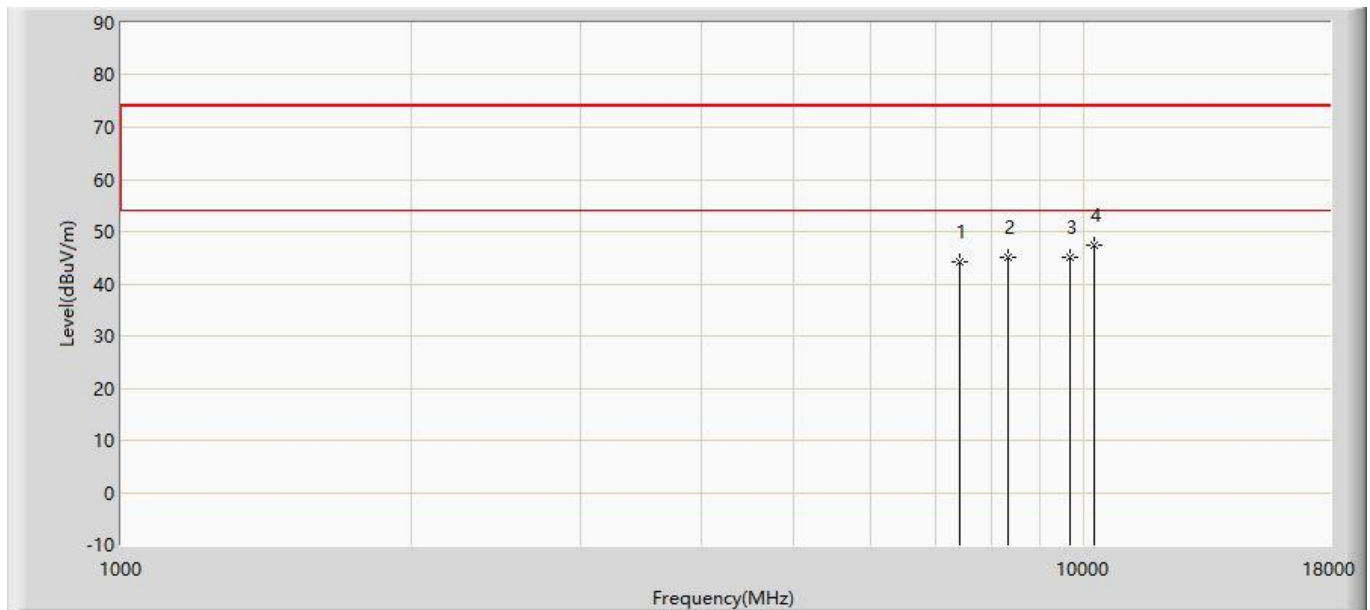


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.326	32.757	-29.674	74.000	11.569	PK
2			8352.500	45.178	32.790	-28.822	74.000	12.388	PK
3			9678.500	45.107	30.902	-28.893	74.000	14.205	PK
4		*	10239.500	47.341	31.310	-26.659	74.000	16.031	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

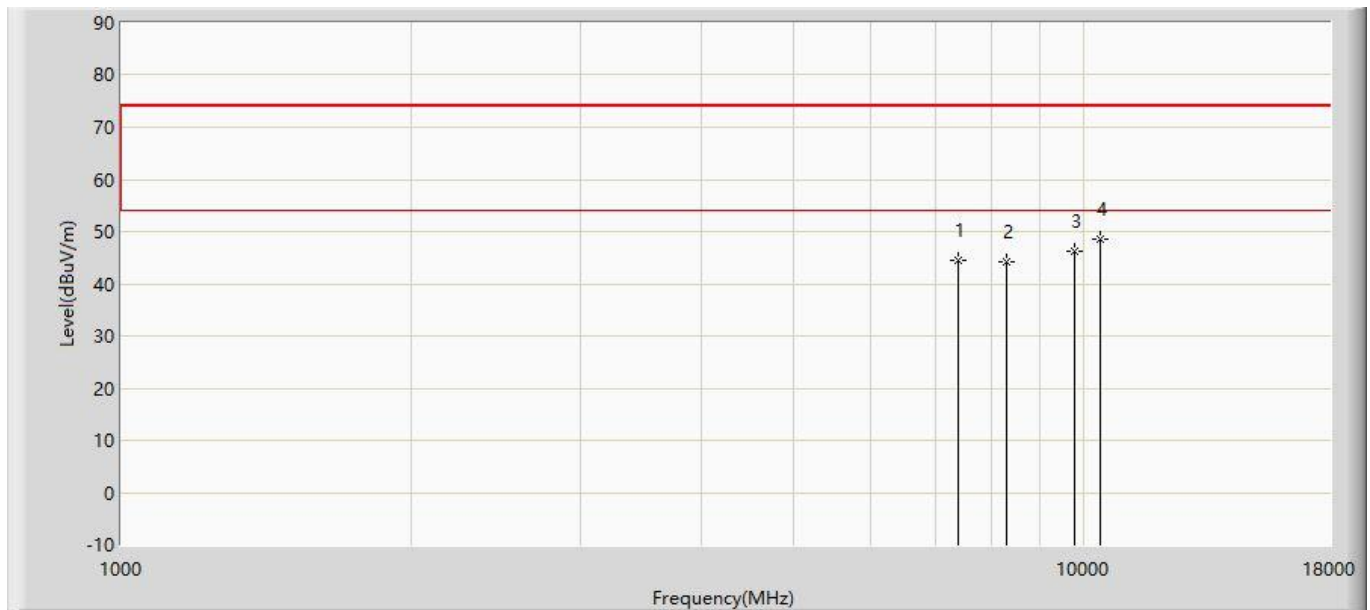


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	44.350	32.857	-29.650	74.000	11.493	PK
2			8318.500	44.240	31.867	-29.760	74.000	12.373	PK
3			9772.000	46.252	31.740	-27.748	74.000	14.512	PK
4		*	10375.500	48.469	32.000	-25.531	74.000	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

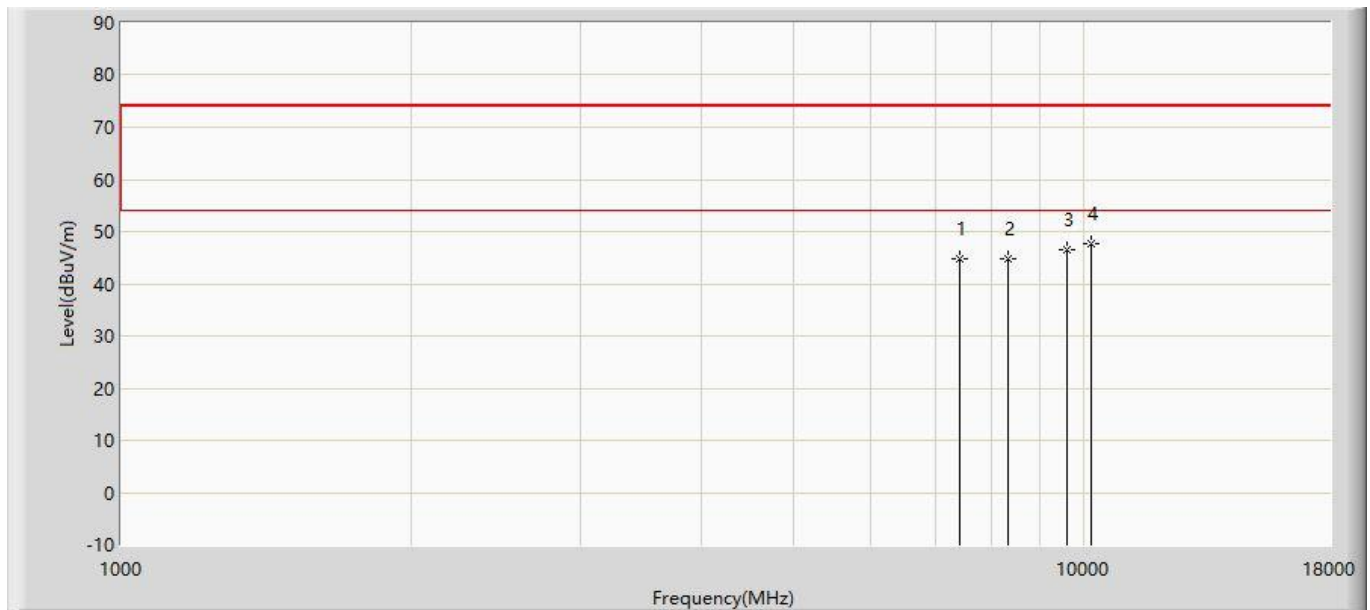


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7417.500	44.658	33.127	-29.342	74.000	11.530	PK
2			8352.500	44.925	32.537	-29.075	74.000	12.388	PK
3			9602.000	46.524	32.570	-27.476	74.000	13.954	PK
4		*	10171.500	47.815	32.003	-26.185	74.000	15.812	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2437MHz with OAW-AP1362 (CDD Mode)	

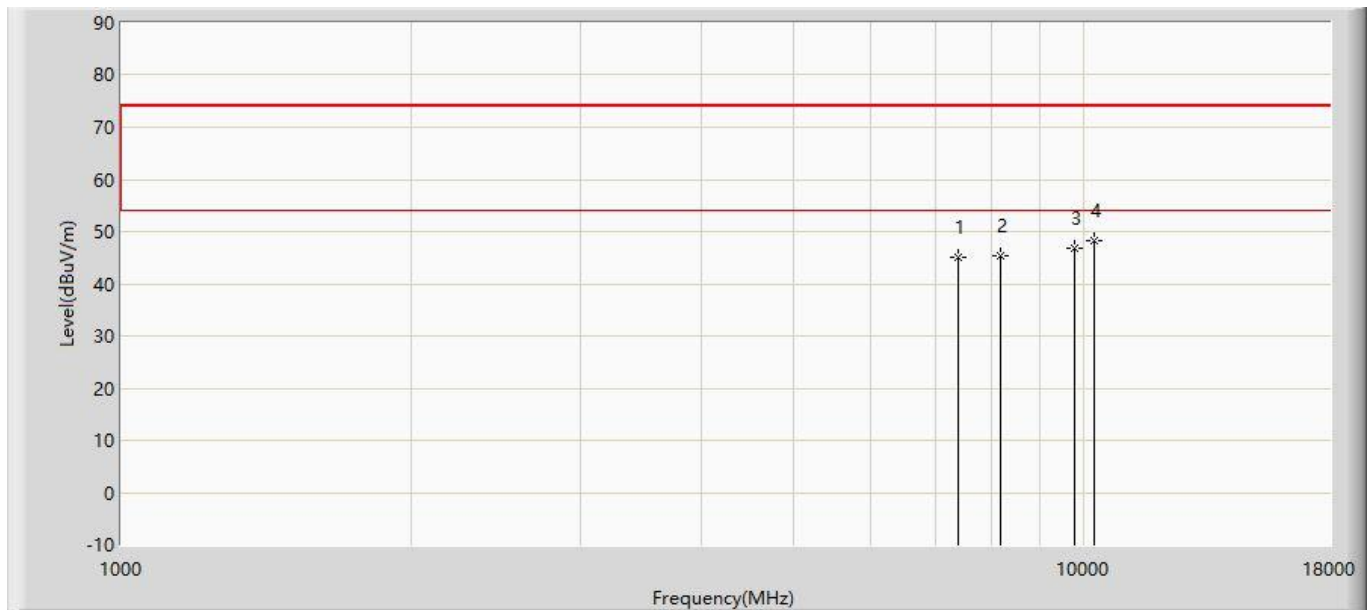


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7392.000	45.041	33.568	-28.959	74.000	11.473	PK
2			8199.500	45.344	33.024	-28.656	74.000	12.320	PK
3			9763.500	46.804	32.320	-27.196	74.000	14.485	PK
4		*	10248.000	48.288	32.229	-25.712	74.000	16.059	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2437MHz with OAW-AP1362 (CDD Mode)	

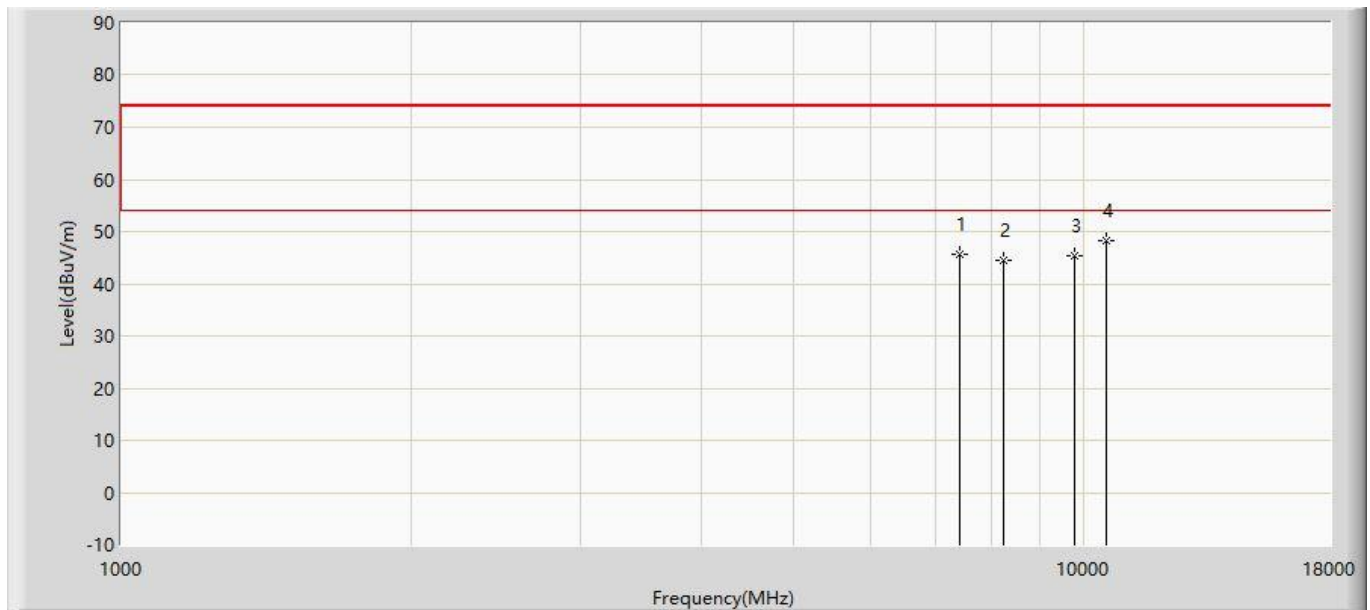


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7426.000	45.572	34.023	-28.428	74.000	11.549	PK
2			8233.500	44.591	32.256	-29.409	74.000	12.335	PK
3			9772.000	45.409	30.897	-28.591	74.000	14.512	PK
4		*	10562.500	48.222	31.263	-25.778	74.000	16.959	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

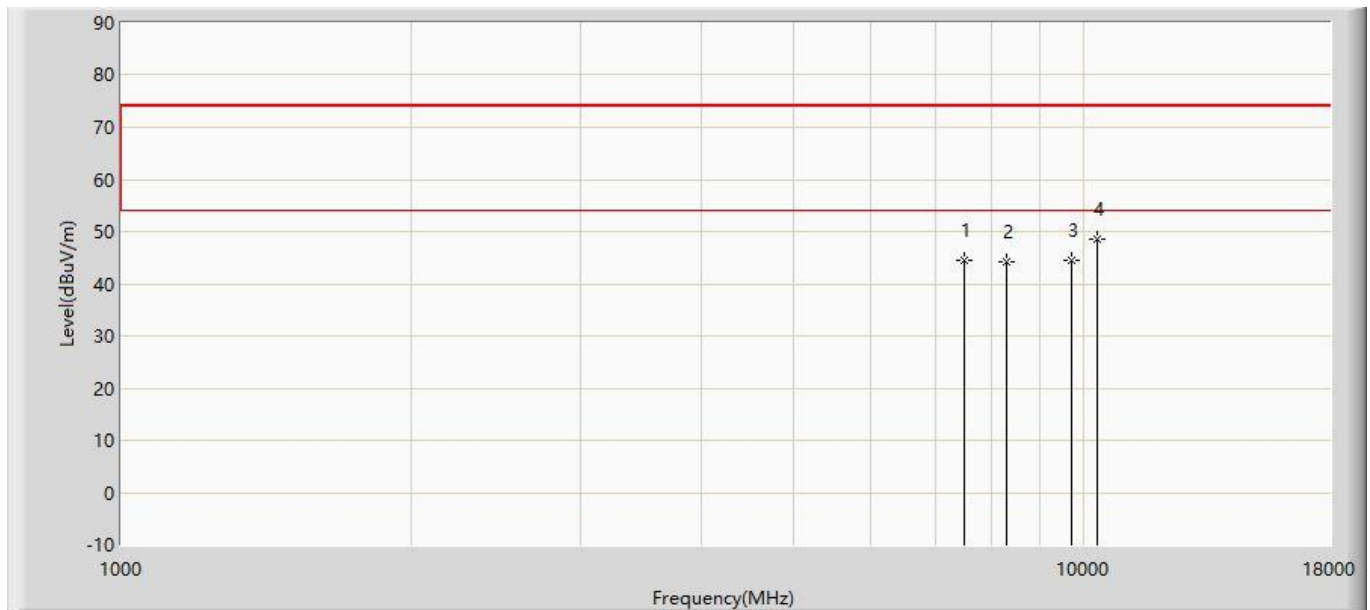


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	44.476	32.762	-29.524	74.000	11.714	PK
2			8310.000	44.289	31.920	-29.711	74.000	12.369	PK
3			9721.000	44.500	30.155	-29.500	74.000	14.345	PK
4		*	10333.000	48.546	32.213	-25.454	74.000	16.333	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

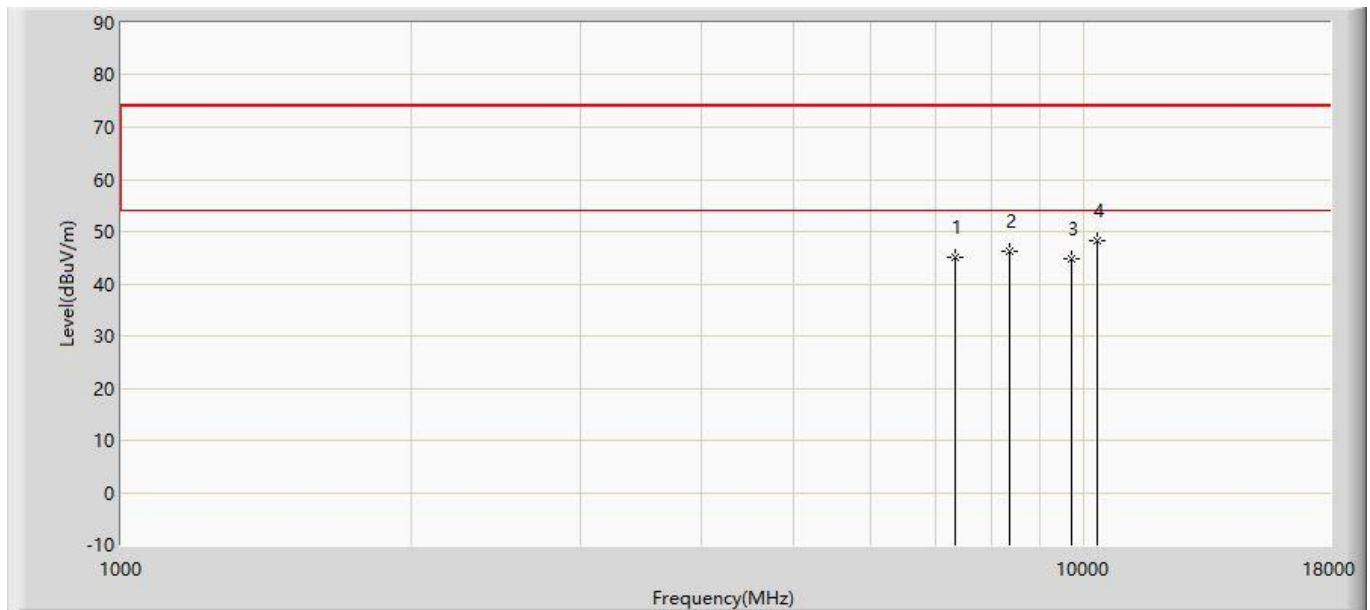


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7358.000	45.054	33.655	-28.946	74.000	11.399	PK
2			8369.500	46.360	33.963	-27.640	74.000	12.397	PK
3			9721.000	44.758	30.413	-29.242	74.000	14.345	PK
4		*	10333.000	48.302	31.969	-25.698	74.000	16.333	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

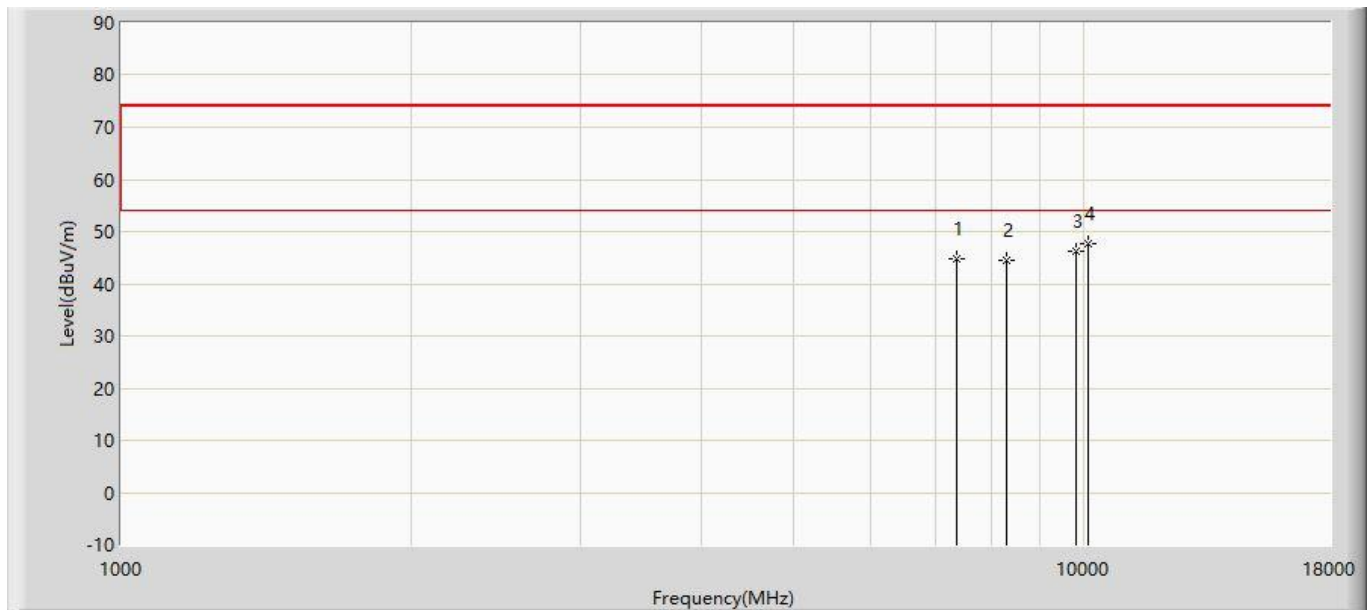


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7366.500	44.817	33.400	-29.183	74.000	11.418	PK
2			8293.000	44.474	32.112	-29.526	74.000	12.362	PK
3			9797.500	46.281	31.685	-27.719	74.000	14.597	PK
4		*	10103.500	47.800	32.207	-26.200	74.000	15.593	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

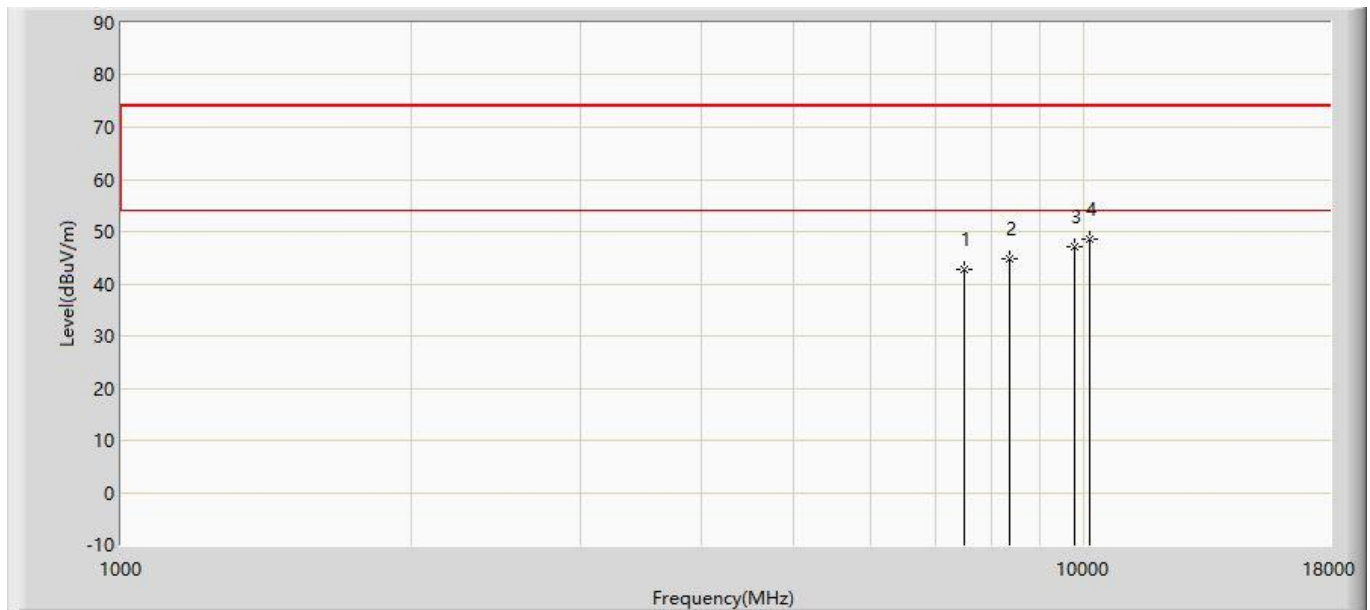


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	42.866	31.152	-31.134	74.000	11.714	PK
2			8369.500	44.914	32.517	-29.086	74.000	12.397	PK
3			9789.000	47.094	32.526	-26.906	74.000	14.568	PK
4		*	10146.000	48.667	32.937	-25.333	74.000	15.730	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 11:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz with OAW-AP1362 (CDD Mode)	

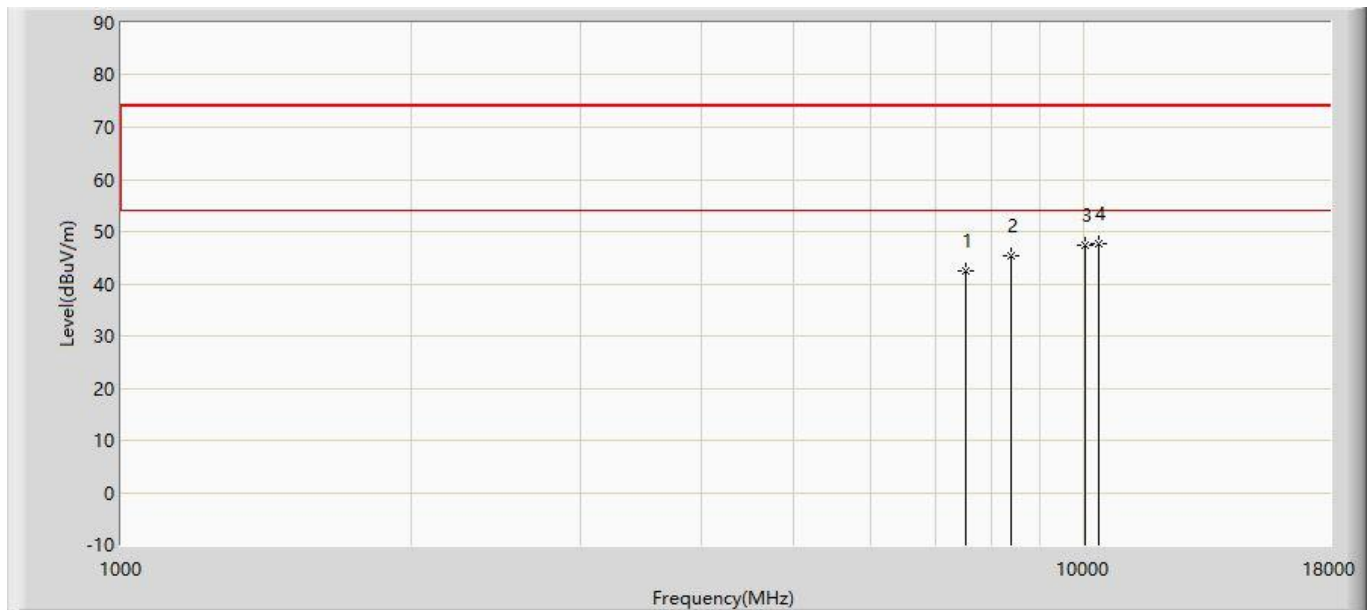


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7528.000	42.377	30.634	-31.623	74.000	11.743	PK
2			8386.500	45.466	33.062	-28.534	74.000	12.404	PK
3			10010.000	47.340	32.048	-26.660	74.000	15.292	PK
4		*	10358.500	47.760	31.346	-26.240	74.000	16.414	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 12:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz with OAW-AP1362 (CDD Mode)	

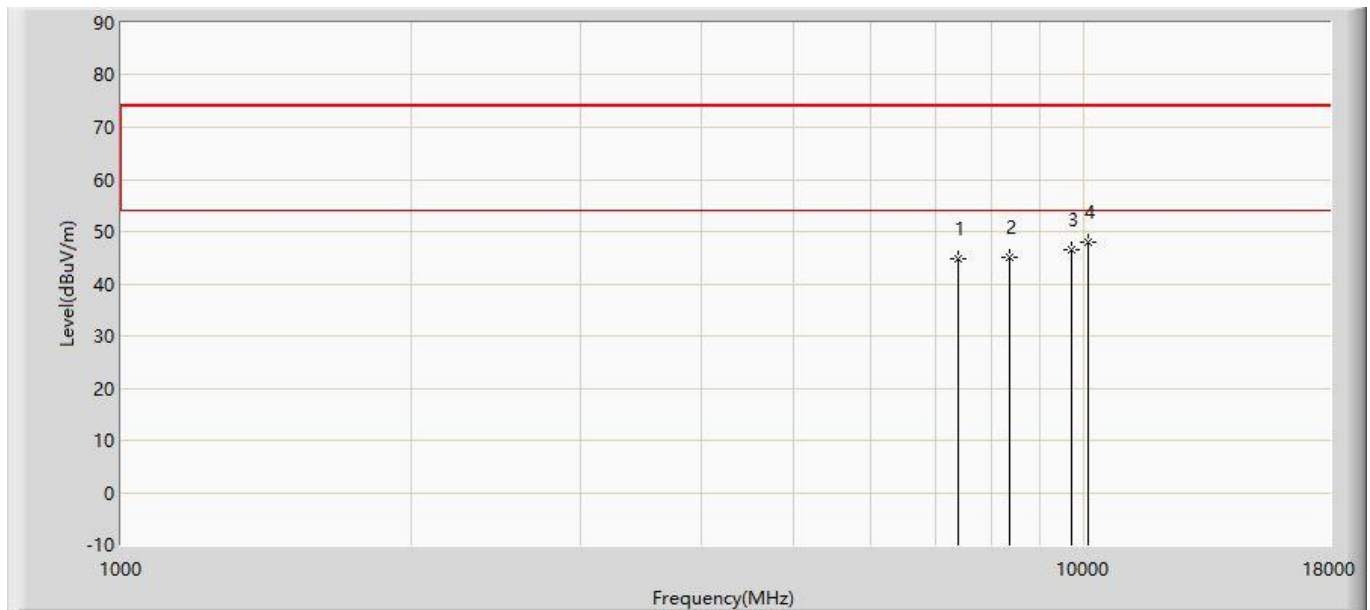


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	44.921	33.409	-29.079	74.000	11.512	PK
2			8369.500	45.158	32.761	-28.842	74.000	12.397	PK
3			9704.000	46.418	32.129	-27.582	74.000	14.289	PK
4		*	10095.000	47.862	32.296	-26.138	74.000	15.566	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 12:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

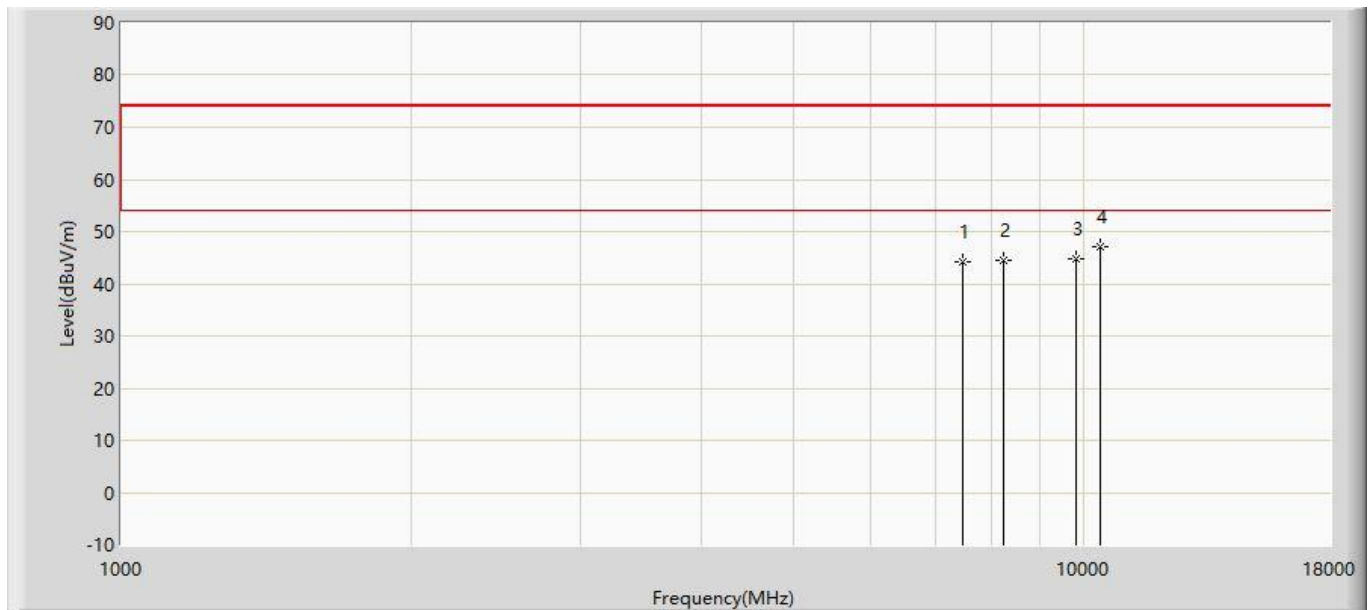


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	44.104	32.460	-29.896	74.000	11.644	PK
2			8233.500	44.536	32.201	-29.464	74.000	12.335	PK
3			9814.500	44.874	30.222	-29.126	74.000	14.652	PK
4		*	10401.000	47.046	30.495	-26.954	74.000	16.551	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 12:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

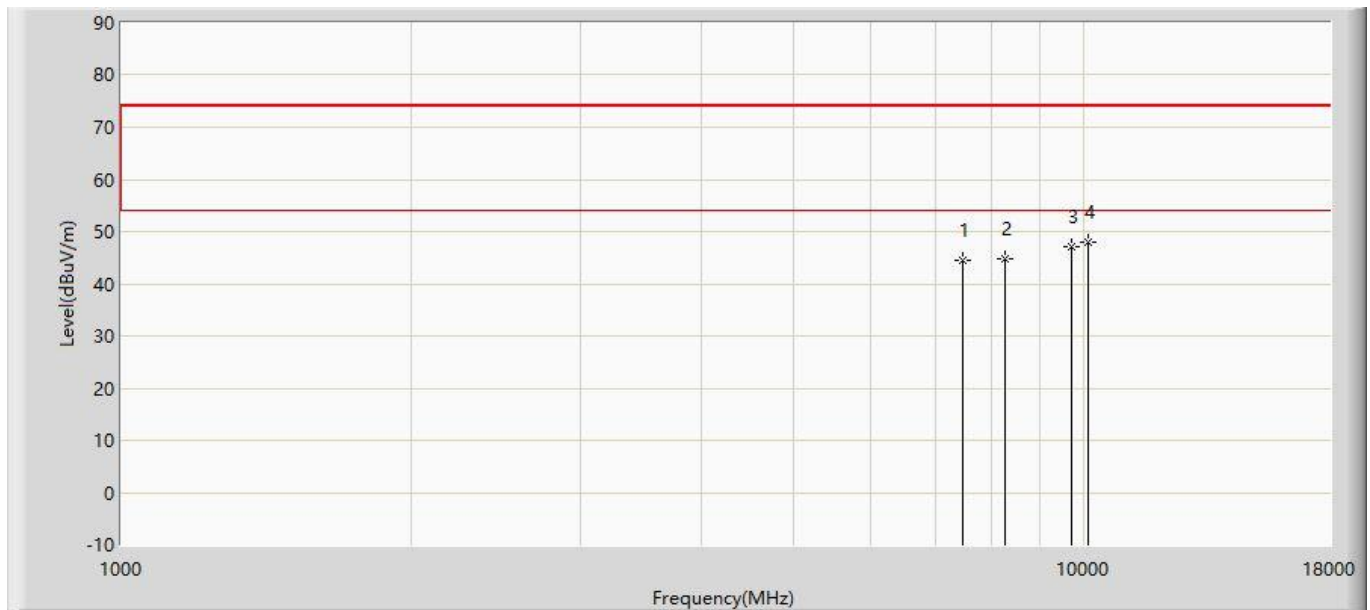


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	44.597	32.953	-29.403	74.000	11.644	PK
2			8267.500	44.722	32.372	-29.278	74.000	12.350	PK
3			9704.000	46.965	32.676	-27.035	74.000	14.289	PK
4		*	10103.500	47.834	32.241	-26.166	74.000	15.593	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 12:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

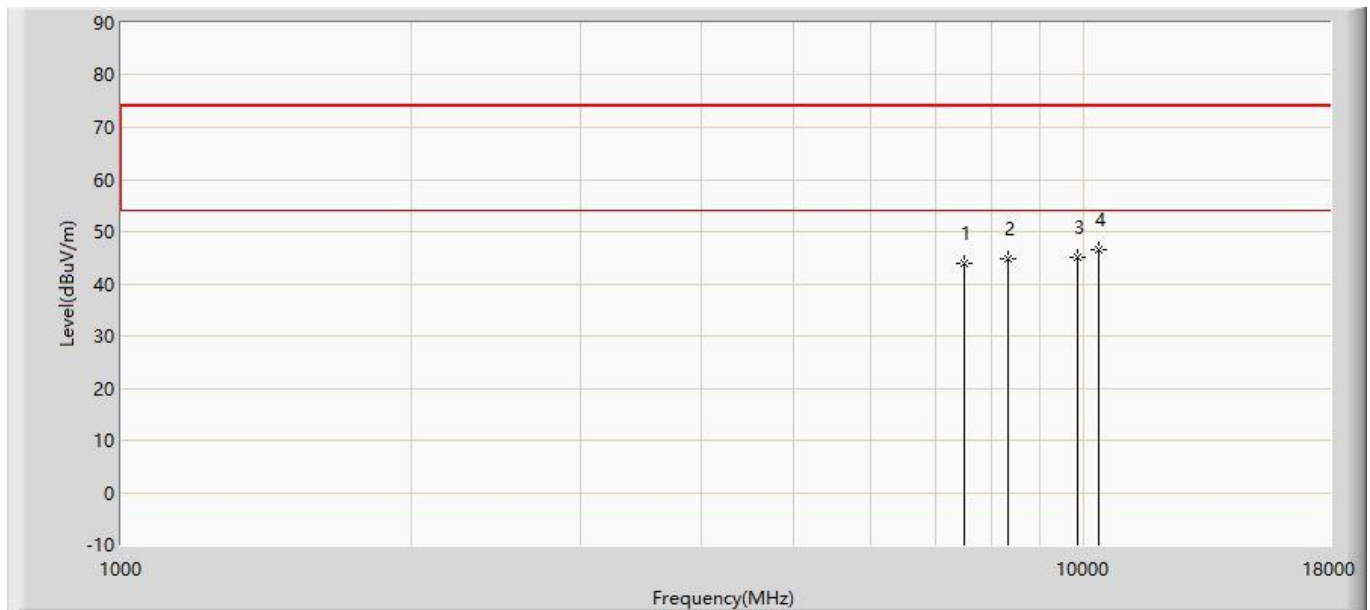


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7519.500	43.939	32.204	-30.061	74.000	11.734	PK
2			8344.000	44.714	32.330	-29.286	74.000	12.384	PK
3			9857.000	45.111	30.321	-28.889	74.000	14.790	PK
4		*	10350.000	46.563	30.176	-27.437	74.000	16.387	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 12:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

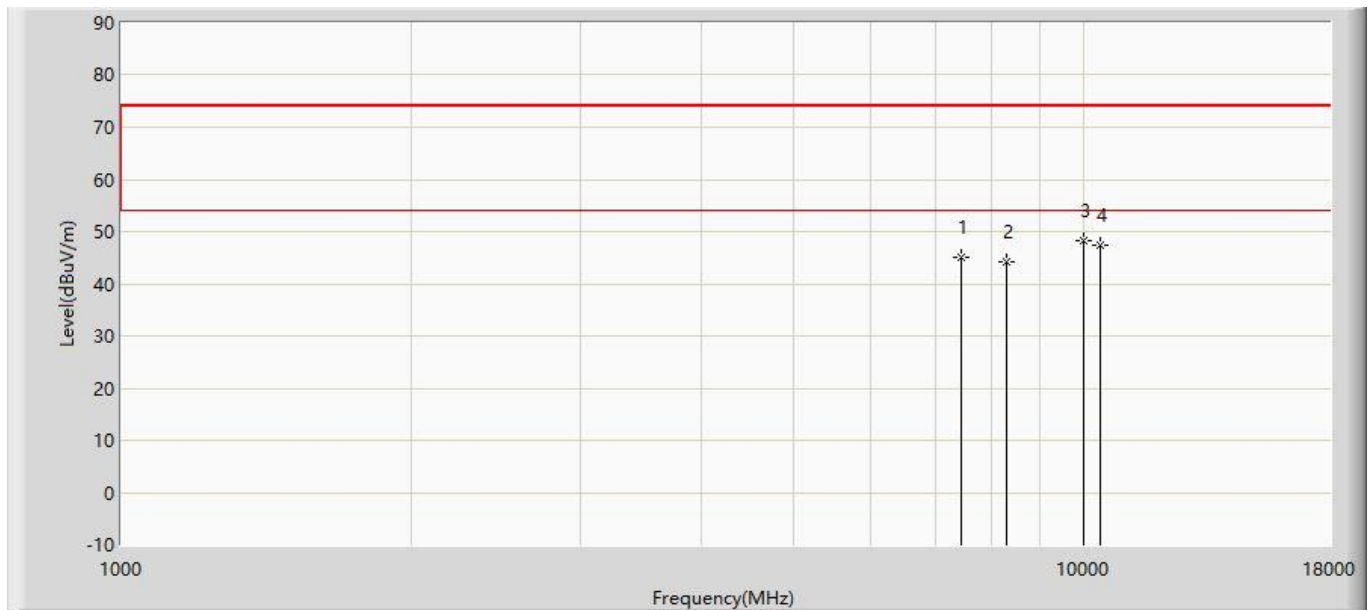


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7451.500	45.111	33.504	-28.889	74.000	11.607	PK
2			8293.000	44.337	31.975	-29.663	74.000	12.362	PK
3		*	10001.500	48.273	33.008	-25.727	74.000	15.265	PK
4			10384.000	47.405	30.909	-26.595	74.000	16.496	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 12:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz with OAW-AP1362 (CDD Mode)	

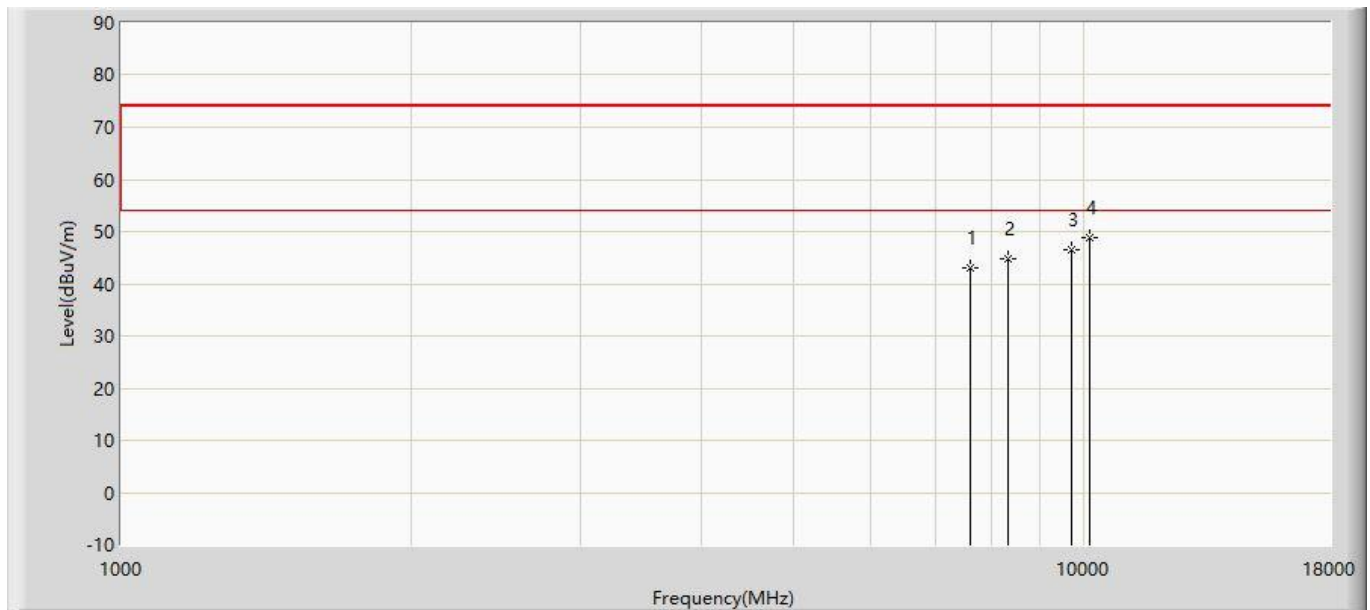


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7621.500	43.084	31.244	-30.916	74.000	11.840	PK
2			8352.500	44.711	32.323	-29.289	74.000	12.388	PK
3			9712.500	46.459	32.142	-27.541	74.000	14.316	PK
4		*	10137.500	48.866	33.163	-25.134	74.000	15.702	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 12:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz with OAW-AP1362 (CDD Mode)	

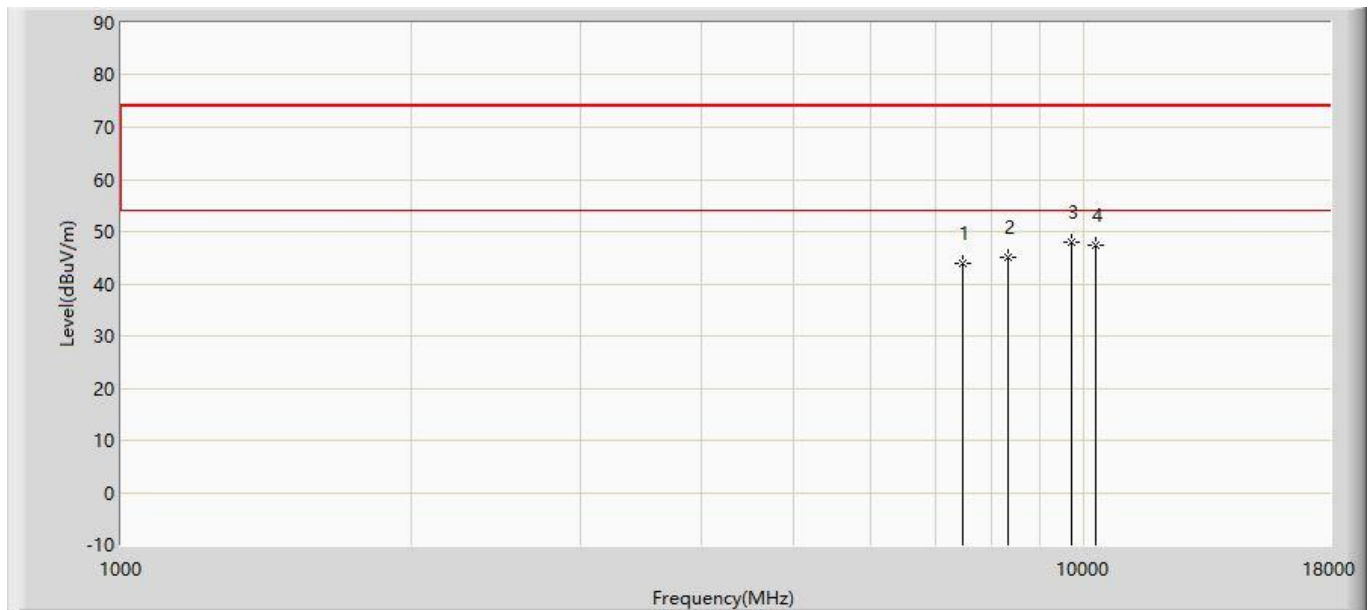

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	43.851	32.207	-30.149	74.000	11.644	PK
2			8335.500	45.199	32.818	-28.801	74.000	12.381	PK
3		*	9704.000	47.991	33.702	-26.009	74.000	14.289	PK
4			10265.000	47.488	31.375	-26.512	74.000	16.113	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).