


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 62：5310 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	105.9 PK			1.02 V	51	102.6	3.3
2	*5310.00	95.6 AV			1.02 V	51	92.3	3.3
3	5350.00	57.7 PK	74.0	-16.3	1.02 V	51	54.3	3.4
4	5350.00	47.6 AV	54.0	-6.4	1.02 V	51	44.2	3.4
5	10620.00	51.8 PK	74.0	-22.2	3.62 V	314	38.9	12.9
6	10620.00	40.7 AV	54.0	-13.3	3.62 V	314	27.8	12.9
7	15930.00	45.4 PK	74.0	-28.6	1.66 V	103	32.6	12.8
8	15930.00	34.9 AV	54.0	-19.1	1.66 V	103	22.1	12.8
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

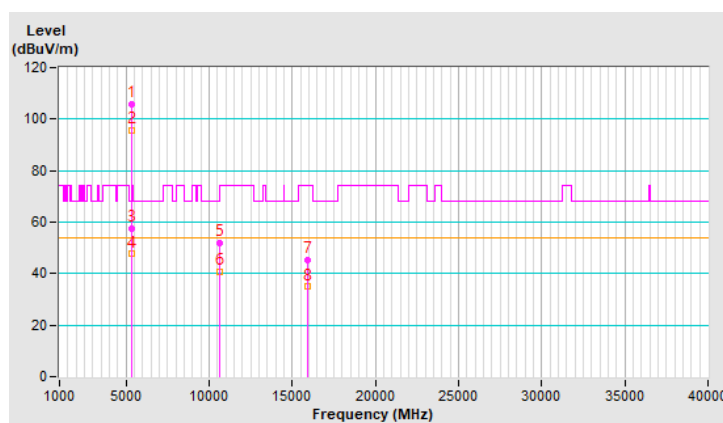


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 102 : 5510 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.4 PK	74.0	-14.6	1.62 H	5	55.6	3.8
2	5460.00	50.4 AV	54.0	-3.6	1.62 H	5	46.6	3.8
3	#5470.00	59.6 PK	68.2	-8.6	1.62 H	5	55.7	3.9
4	*5510.00	108.5 PK			1.62 H	5	104.6	3.9
5	*5510.00	100.0 AV			1.62 H	5	96.1	3.9
6	11020.00	52.9 PK	74.0	-21.1	1.24 H	127	39.9	13.0
7	11020.00	42.5 AV	54.0	-11.5	1.24 H	127	29.5	13.0
8	#16530.00	46.6 PK	68.2	-21.6	1.58 H	14	31.9	14.7
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

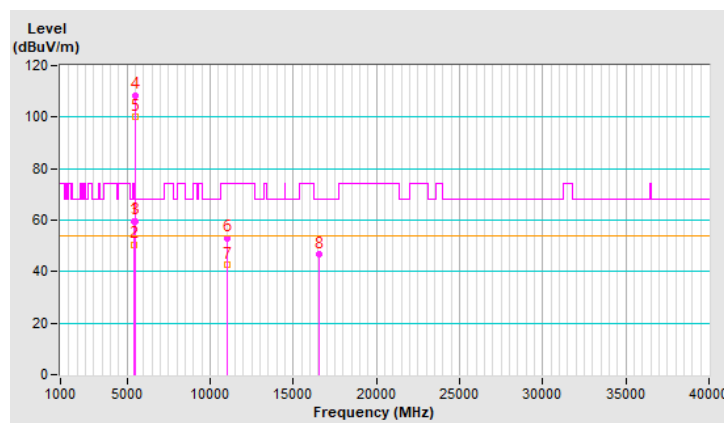


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 102 : 5510 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.8 PK	74.0	-15.2	1.05 V	50	55.0	3.8
2	5460.00	47.9 AV	54.0	-6.1	1.05 V	50	44.1	3.8
3	#5465.74	58.6 PK	68.2	-9.6	1.05 V	50	54.7	3.9
4	*5510.00	107.1 PK			1.05 V	50	103.2	3.9
5	*5510.00	97.7 AV			1.05 V	50	93.8	3.9
6	11020.00	53.2 PK	74.0	-20.8	3.78 V	295	40.2	13.0
7	11020.00	43.0 AV	54.0	-11.0	3.78 V	295	30.0	13.0
8	#16530.00	46.1 PK	68.2	-22.1	1.55 V	109	31.4	14.7
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

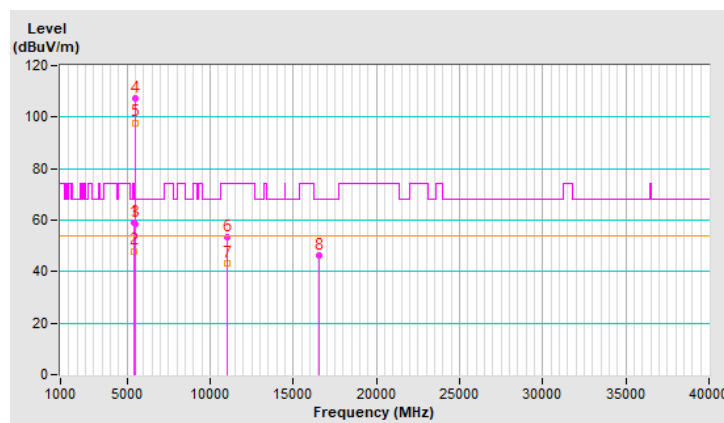


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 110：5550 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.7 PK			1.06 H	343	107.9	3.8
2	*5550.00	102.3 AV			1.06 H	343	98.5	3.8
3	11100.00	53.2 PK	74.0	-20.8	1.18 H	117	40.2	13.0
4	11100.00	42.4 AV	54.0	-11.6	1.18 H	117	29.4	13.0
5	#16650.00	46.8 PK	68.2	-21.4	1.57 H	16	31.1	15.7
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

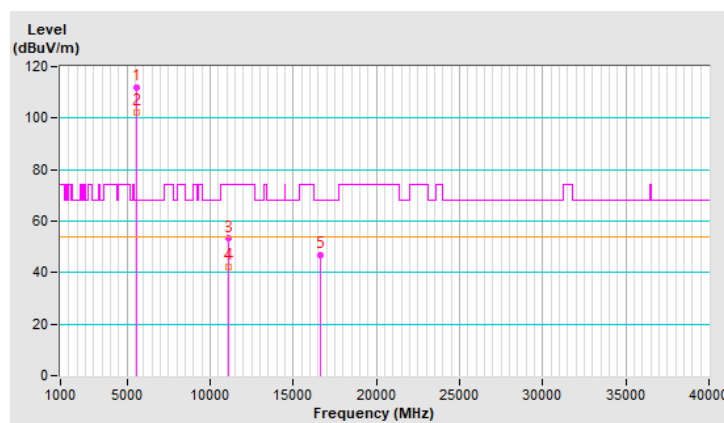


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 110：5550 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	106.2 PK			1.09 V	71	102.4	3.8
2	*5550.00	99.3 AV			1.09 V	71	95.5	3.8
3	11100.00	55.0 PK	74.0	-19.0	3.74 V	306	42.0	13.0
4	11100.00	42.9 AV	54.0	-11.1	3.74 V	306	29.9	13.0
5	#16650.00	46.2 PK	68.2	-22.0	1.61 V	97	30.5	15.7
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

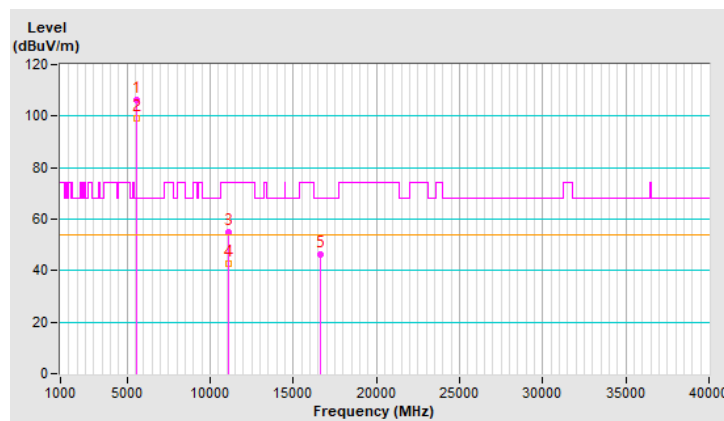


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 134 : 5670 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	109.1 PK			1.00 H	355	105.1	4.0
2	*5670.00	100.6 AV			1.00 H	355	96.6	4.0
3	#5725.00	58.3 PK	68.2	-9.9	1.00 H	355	54.3	4.0
4	11340.00	53.5 PK	74.0	-20.5	1.18 H	128	40.3	13.2
5	11340.00	42.5 AV	54.0	-11.5	1.18 H	128	29.3	13.2
6	#17010.00	46.9 PK	68.2	-21.3	1.54 H	0	29.9	17.0
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

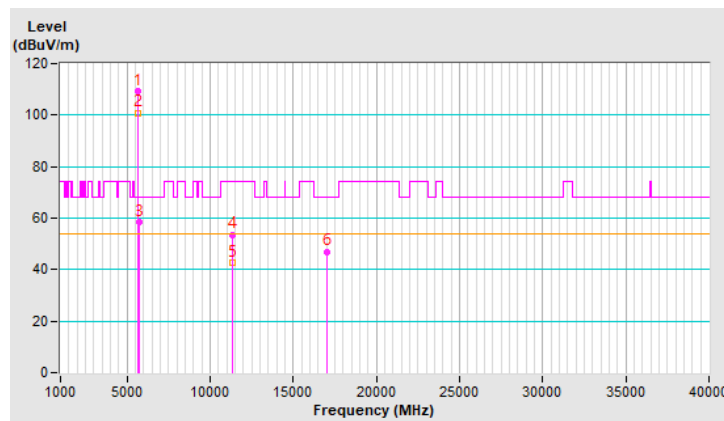


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 134 : 5670 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	106.8 PK			1.11 V	73	102.8	4.0
2	*5670.00	99.7 AV			1.11 V	73	95.7	4.0
3	#5725.00	55.4 PK	68.2	-12.8	1.11 V	73	51.4	4.0
4	11340.00	55.0 PK	74.0	-19.0	3.65 V	305	41.8	13.2
5	11340.00	43.4 AV	54.0	-10.6	3.65 V	305	30.2	13.2
6	#17010.00	46.7 PK	68.2	-21.5	1.55 V	101	29.7	17.0
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

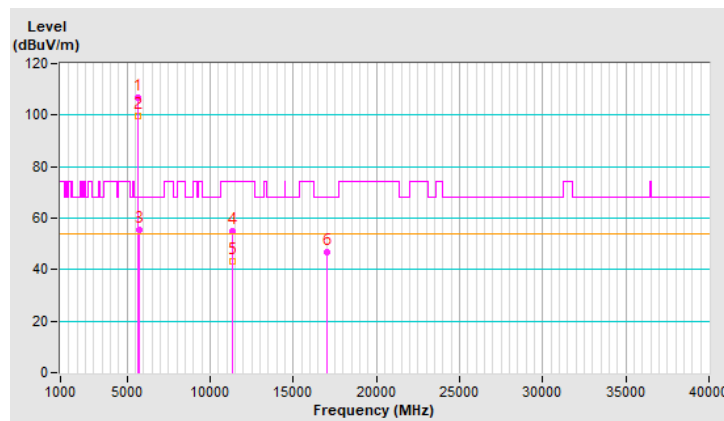


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 142 : 5710 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	1.00 H	3	46.6	3.8
2	5460.00	39.9 AV	54.0	-14.1	1.00 H	3	36.1	3.8
3	#5470.00	51.6 PK	68.2	-16.6	1.00 H	3	47.7	3.9
4	*5710.00	112.4 PK			1.00 H	3	108.4	4.0
5	*5710.00	101.7 AV			1.00 H	3	97.7	4.0
6	#5850.00	56.9 PK	68.2	-11.3	1.00 H	3	52.5	4.4
7	11420.00	52.7 PK	74.0	-21.3	1.13 H	123	39.5	13.2
8	11420.00	42.1 AV	54.0	-11.9	1.13 H	123	28.9	13.2
9	#17130.00	46.6 PK	68.2	-21.6	1.57 H	13	29.4	17.2
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

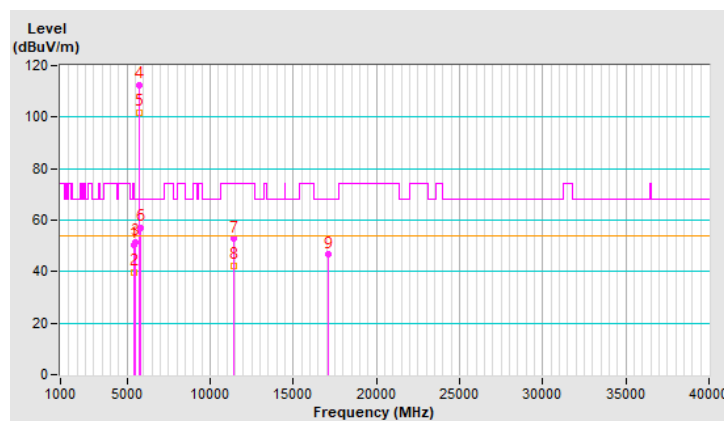


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 142：5710 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	1.08 V	69	46.6	3.8
2	5460.00	39.7 AV	54.0	-14.3	1.08 V	69	35.9	3.8
3	#5470.00	51.8 PK	68.2	-16.4	1.08 V	69	47.9	3.9
4	*5710.00	106.9 PK			1.08 V	69	102.9	4.0
5	*5710.00	99.8 AV			1.08 V	69	95.8	4.0
6	#5850.00	56.5 PK	68.2	-11.7	1.08 V	69	52.1	4.4
7	11420.00	54.4 PK	74.0	-19.6	3.68 V	297	41.2	13.2
8	11420.00	43.0 AV	54.0	-11.0	3.68 V	297	29.8	13.2
9	#17130.00	47.0 PK	68.2	-21.2	1.51 V	113	29.8	17.2
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

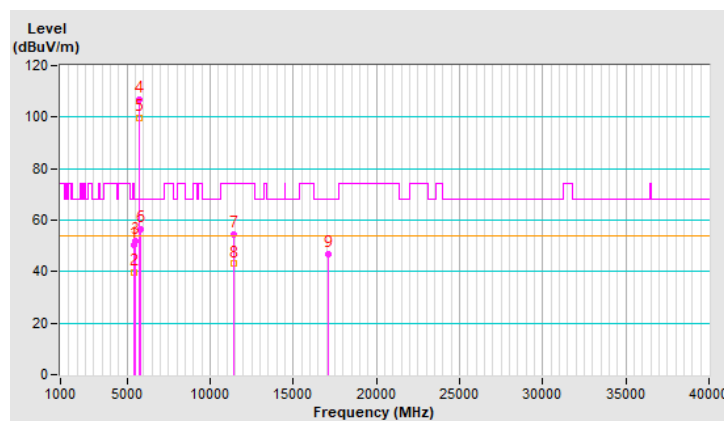


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 151 : 5755 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	110.7 PK			3.44 H	360	106.7	4.0
2	*5755.00	100.9 AV			3.44 H	360	96.9	4.0
3	11510.00	49.7 PK	74.0	-24.3	2.79 H	311	36.4	13.3
4	11510.00	39.0 AV	54.0	-15.0	2.79 H	311	25.7	13.3
5	#17265.00	49.6 PK	68.2	-18.6	1.59 H	302	32.1	17.5
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

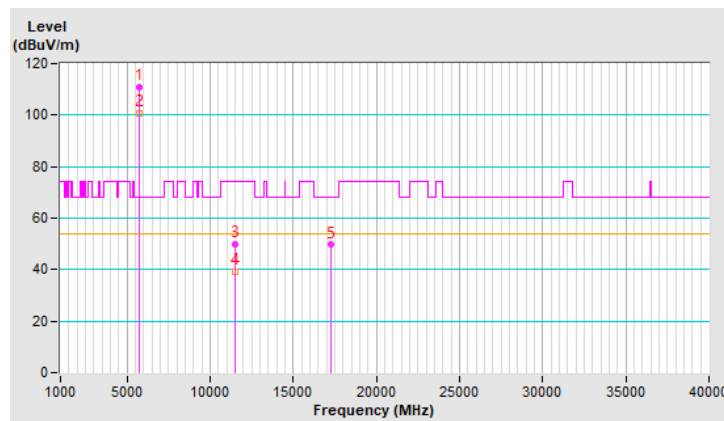


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 151 : 5755 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	109.0 PK			1.00 V	45	105.0	4.0
2	*5755.00	99.1 AV			1.00 V	45	95.1	4.0
3	11510.00	49.2 PK	74.0	-24.8	2.15 V	209	35.9	13.3
4	11510.00	38.6 AV	54.0	-15.4	2.15 V	209	25.3	13.3
5	#17265.00	50.3 PK	68.2	-17.9	1.97 V	189	32.8	17.5
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

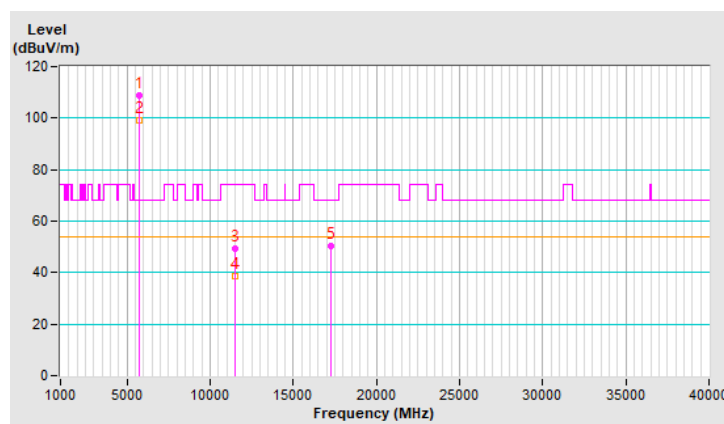


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 159 : 5795 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	111.3 PK			1.00 H	356	107.1	4.2
2	*5795.00	101.6 AV			1.00 H	356	97.4	4.2
3	11590.00	50.2 PK	74.0	-23.8	2.82 H	325	36.9	13.3
4	11590.00	39.3 AV	54.0	-14.7	2.82 H	325	26.0	13.3
5	#17385.00	49.3 PK	68.2	-18.9	1.56 H	304	31.6	17.7
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

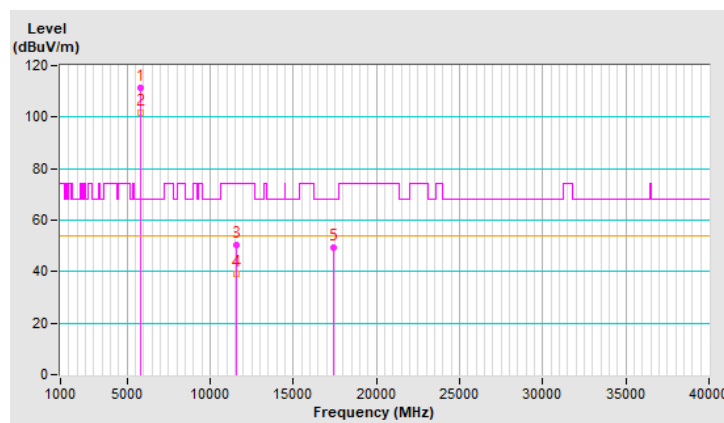


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 159 : 5795 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	107.9 PK			1.03 V	48	103.7	4.2
2	*5795.00	98.7 AV			1.03 V	48	94.5	4.2
3	11590.00	49.4 PK	74.0	-24.6	2.16 V	217	36.1	13.3
4	11590.00	38.8 AV	54.0	-15.2	2.16 V	217	25.5	13.3
5	#17385.00	50.8 PK	68.2	-17.4	1.92 V	198	33.1	17.7
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

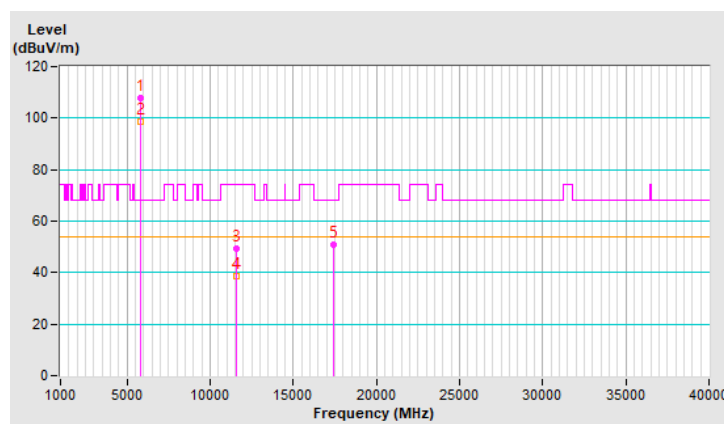


802.11ax (HE80)

操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 42 : 5210 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.81 H	359	55.3	3.7
2	5150.00	50.4 AV	54.0	-3.6	1.81 H	359	46.7	3.7
3	*5210.00	101.7 PK			1.81 H	359	98.1	3.6
4	*5210.00	94.4 AV			1.81 H	359	90.8	3.6
5	5350.00	49.3 PK	74.0	-24.7	1.81 H	359	45.9	3.4
6	5350.00	40.2 AV	54.0	-13.8	1.81 H	359	36.8	3.4
7	#10420.00	47.1 PK	68.2	-21.1	1.51 H	75	34.3	12.8
8	15630.00	44.8 PK	74.0	-29.2	1.54 H	3	31.1	13.7
9	15630.00	33.5 AV	54.0	-20.5	1.54 H	3	19.8	13.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

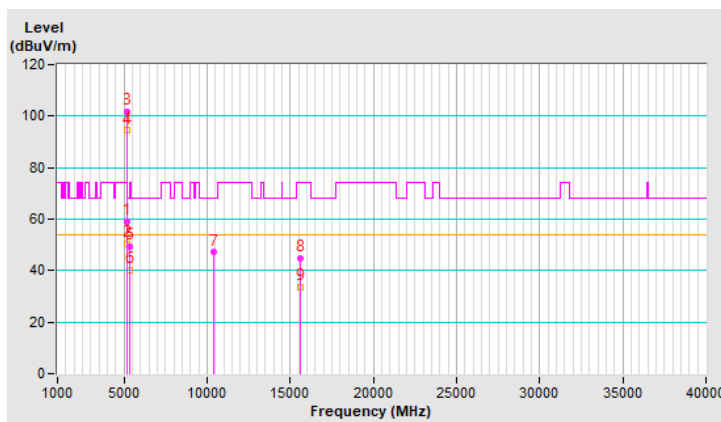


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 42：5210 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	1.02 V	48	54.5	3.7
2	5150.00	48.4 AV	54.0	-5.6	1.02 V	48	44.7	3.7
3	*5210.00	98.1 PK			1.02 V	48	94.5	3.6
4	*5210.00	90.5 AV			1.02 V	48	86.9	3.6
5	5350.00	50.7 PK	74.0	-23.3	1.02 V	48	47.3	3.4
6	5350.00	40.1 AV	54.0	-13.9	1.02 V	48	36.7	3.4
7	#10420.00	48.5 PK	68.2	-19.7	1.34 V	68	35.7	12.8
8	15630.00	44.8 PK	74.0	-29.2	1.23 V	51	31.1	13.7
9	15630.00	33.7 AV	54.0	-20.3	1.23 V	51	20.0	13.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

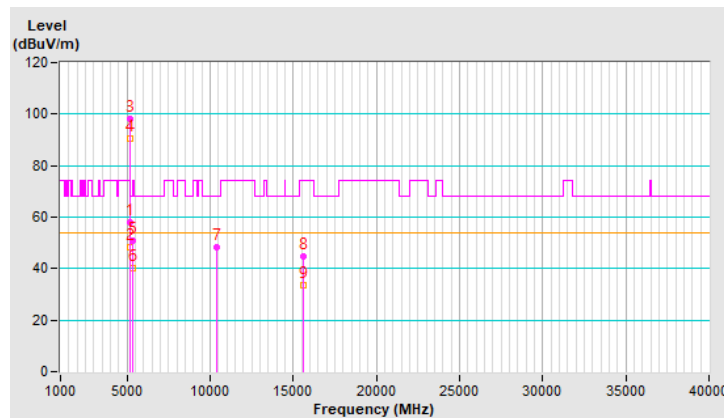


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 58 : 5290 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.3 PK	74.0	-21.7	1.59 H	357	48.6	3.7
2	5150.00	42.0 AV	54.0	-12.0	1.59 H	357	38.3	3.7
3	*5290.00	102.0 PK			1.59 H	357	98.7	3.3
4	*5290.00	94.8 AV			1.59 H	357	91.5	3.3
5	5350.00	57.7 PK	74.0	-16.3	1.59 H	357	54.3	3.4
6	5350.00	48.3 AV	54.0	-5.7	1.59 H	357	44.9	3.4
7	#10580.00	47.4 PK	68.2	-20.8	1.49 H	68	34.5	12.9
8	15870.00	45.0 PK	74.0	-29.0	1.58 H	351	32.1	12.9
9	15870.00	33.6 AV	54.0	-20.4	1.58 H	351	20.7	12.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

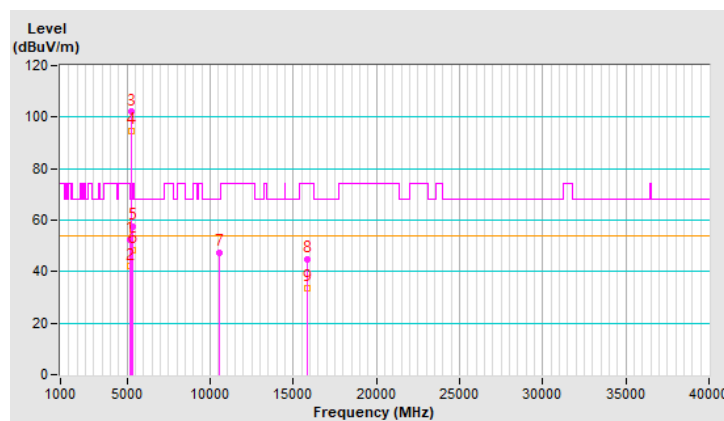


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 58 : 5290 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.5 PK	74.0	-23.5	1.03 V	53	46.8	3.7
2	5150.00	41.5 AV	54.0	-12.5	1.03 V	53	37.8	3.7
3	*5290.00	101.3 PK			1.03 V	53	98.0	3.3
4	*5290.00	92.2 AV			1.03 V	53	88.9	3.3
5	5350.00	54.0 PK	74.0	-20.0	1.03 V	53	50.6	3.4
6	5350.00	46.2 AV	54.0	-7.8	1.03 V	53	42.8	3.4
7	#10580.00	48.9 PK	68.2	-19.3	1.39 V	74	36.0	12.9
8	15870.00	45.5 PK	74.0	-28.5	1.27 V	48	32.6	12.9
9	15870.00	34.1 AV	54.0	-19.9	1.27 V	48	21.2	12.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

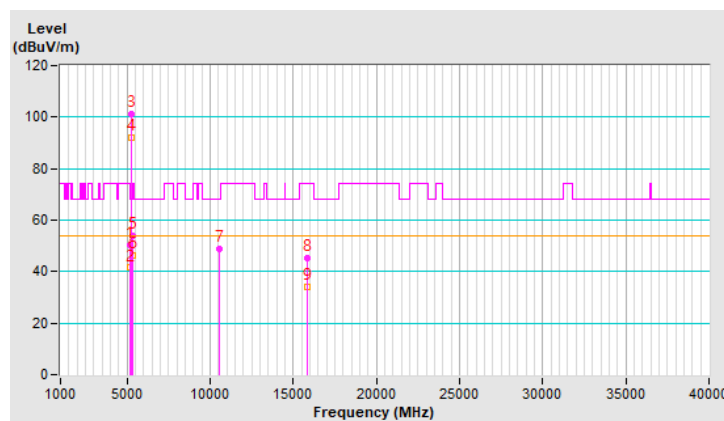


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 106 : 5530 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.0 PK	74.0	-17.0	1.23 H	360	53.2	3.8
2	5460.00	48.5 AV	54.0	-5.5	1.23 H	360	44.7	3.8
3	#5469.04	59.4 PK	68.2	-8.8	1.23 H	360	55.5	3.9
4	*5530.00	103.5 PK			1.23 H	360	99.7	3.8
5	*5530.00	95.7 AV			1.23 H	360	91.9	3.8
6	#5747.11	51.0 PK	68.2	-17.2	1.23 H	360	47.0	4.0
7	11060.00	47.6 PK	74.0	-26.4	1.54 H	62	34.7	12.9
8	11060.00	38.8 AV	54.0	-15.2	1.54 H	62	25.9	12.9
9	#16590.00	44.4 PK	68.2	-23.8	1.61 H	360	29.5	14.9
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

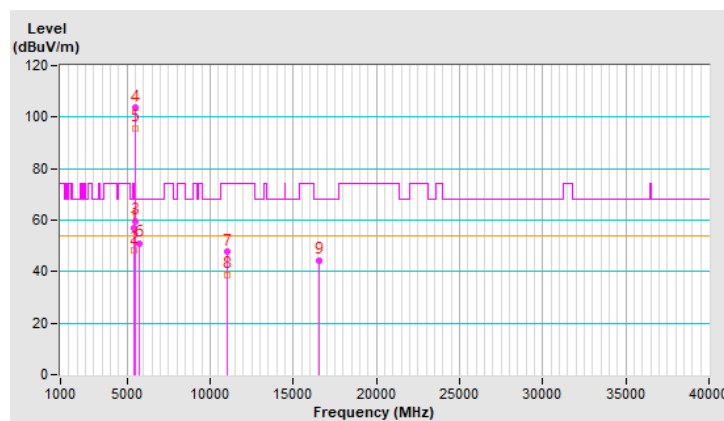


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 106 : 5530 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.5 PK	74.0	-16.5	1.02 V	51	53.7	3.8
2	5460.00	48.5 AV	54.0	-5.5	1.02 V	51	44.7	3.8
3	#5470.00	54.1 PK	68.2	-14.1	1.02 V	51	50.2	3.9
4	*5530.00	102.7 PK			1.02 V	51	98.9	3.8
5	*5530.00	93.1 AV			1.02 V	51	89.3	3.8
6	#5831.26	50.8 PK	68.2	-17.4	1.02 V	51	46.5	4.3
7	11060.00	48.7 PK	74.0	-25.3	1.47 V	81	35.8	12.9
8	11060.00	39.3 AV	54.0	-14.7	1.47 V	81	26.4	12.9
9	#16590.00	44.7 PK	68.2	-23.5	1.29 V	54	29.8	14.9
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

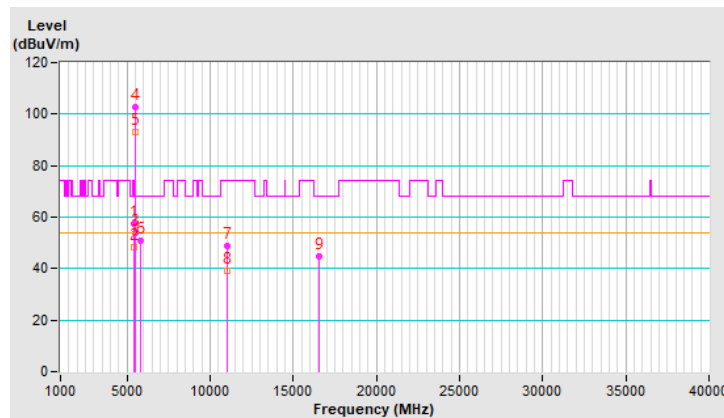


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 122 : 5610 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	107.2 PK			1.50 H	2	103.5	3.7
2	*5610.00	98.1 AV			1.50 H	2	94.4	3.7
3	#5725.00	55.5 PK	68.2	-12.7	1.50 H	2	51.5	4.0
4	11220.00	47.0 PK	74.0	-27.0	1.47 H	68	33.8	13.2
5	11220.00	38.3 AV	54.0	-15.7	1.47 H	68	25.1	13.2
6	#16830.00	45.5 PK	68.2	-22.7	1.56 H	4	29.4	16.1
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

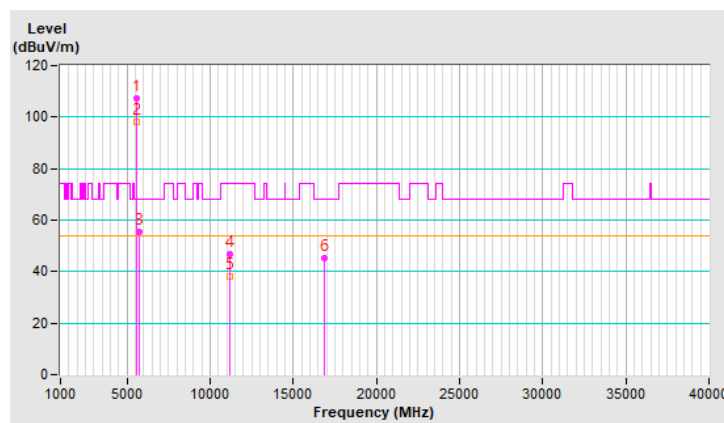


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 122 : 5610 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	104.8 PK			1.05 V	51	101.1	3.7
2	*5610.00	94.2 AV			1.05 V	51	90.5	3.7
3	#5725.00	52.4 PK	68.2	-15.8	1.05 V	51	48.4	4.0
4	11220.00	48.8 PK	74.0	-25.2	1.46 V	77	35.6	13.2
5	11220.00	39.4 AV	54.0	-14.6	1.46 V	77	26.2	13.2
6	#16830.00	45.1 PK	68.2	-23.1	1.30 V	49	29.0	16.1
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

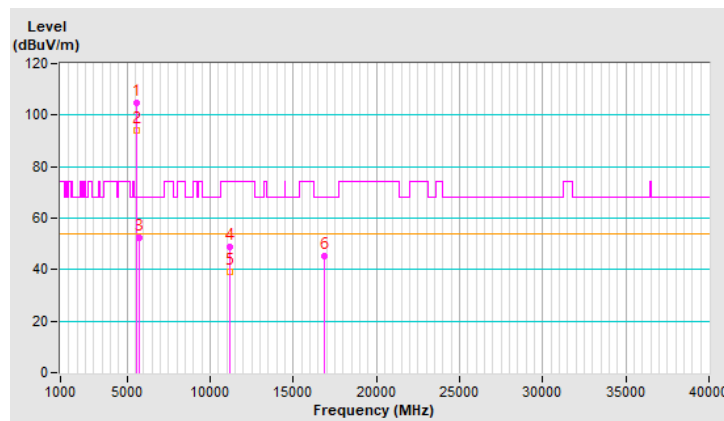


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 138 : 5690 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.6 PK	74.0	-23.4	1.53 H	16	46.8	3.8
2	5460.00	40.1 AV	54.0	-13.9	1.53 H	16	36.3	3.8
3	#5470.00	51.3 PK	68.2	-16.9	1.53 H	16	47.4	3.9
4	*5690.00	107.1 PK			1.53 H	16	103.1	4.0
5	*5690.00	97.8 AV			1.53 H	16	93.8	4.0
6	#5850.00	56.6 PK	68.2	-11.6	1.53 H	16	52.2	4.4
7	11380.00	47.3 PK	74.0	-26.7	1.47 H	71	34.1	13.2
8	11380.00	38.2 AV	54.0	-15.8	1.47 H	71	25.0	13.2
9	#17070.00	45.1 PK	68.2	-23.1	1.58 H	353	28.1	17.0
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

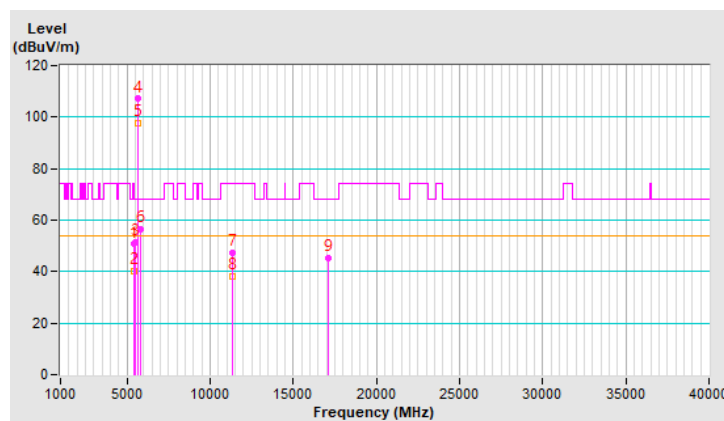


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 138 : 5690 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.9 PK	74.0	-23.1	1.10 V	63	47.1	3.8
2	5460.00	40.2 AV	54.0	-13.8	1.10 V	63	36.4	3.8
3	#5470.00	50.8 PK	68.2	-17.4	1.10 V	63	46.9	3.9
4	*5690.00	105.1 PK			1.10 V	63	101.1	4.0
5	*5690.00	94.3 AV			1.10 V	63	90.3	4.0
6	#5850.00	56.9 PK	68.2	-11.3	1.10 V	63	52.5	4.4
7	11380.00	48.8 PK	74.0	-25.2	1.41 V	67	35.6	13.2
8	11380.00	39.5 AV	54.0	-14.5	1.41 V	67	26.3	13.2
9	#17070.00	44.6 PK	68.2	-23.6	1.33 V	63	27.6	17.0
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

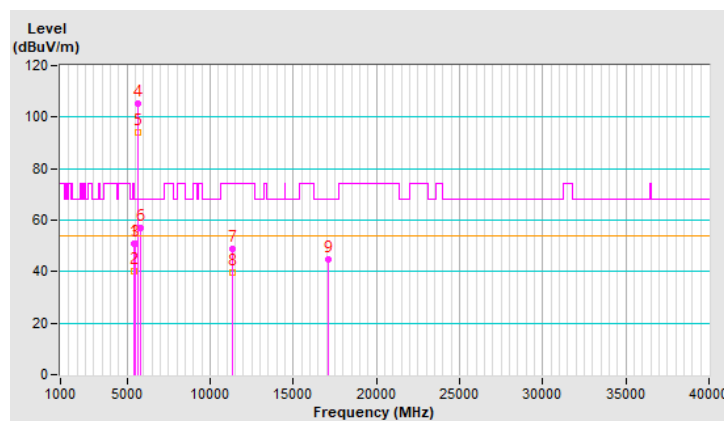


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 155 : 5775 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	107.3 PK			1.00 H	359	103.2	4.1
2	*5775.00	97.7 AV			1.00 H	359	93.6	4.1
3	11550.00	49.6 PK	74.0	-24.4	2.83 H	322	36.4	13.2
4	11550.00	38.9 AV	54.0	-15.1	2.83 H	322	25.7	13.2
5	#17325.00	49.2 PK	68.2	-19.0	1.57 H	310	31.6	17.6
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

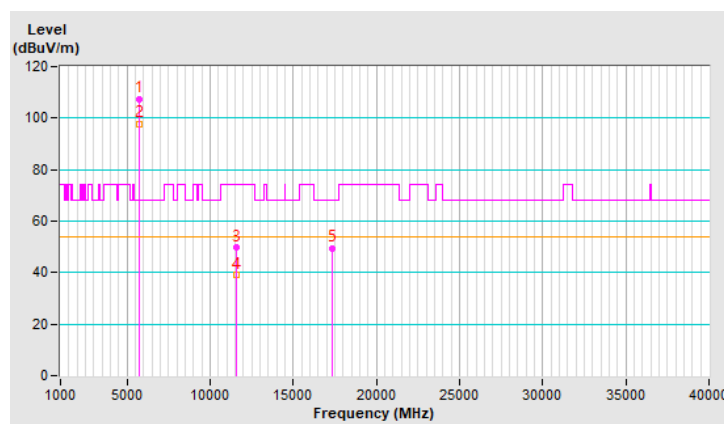


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 155 : 5775 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	104.2 PK			1.07 V	47	100.1	4.1
2	*5775.00	94.8 AV			1.07 V	47	90.7	4.1
3	11550.00	49.6 PK	74.0	-24.4	2.18 V	212	36.4	13.2
4	11550.00	38.9 AV	54.0	-15.1	2.18 V	212	25.7	13.2
5	#17325.00	50.0 PK	68.2	-18.2	1.98 V	180	32.4	17.6
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

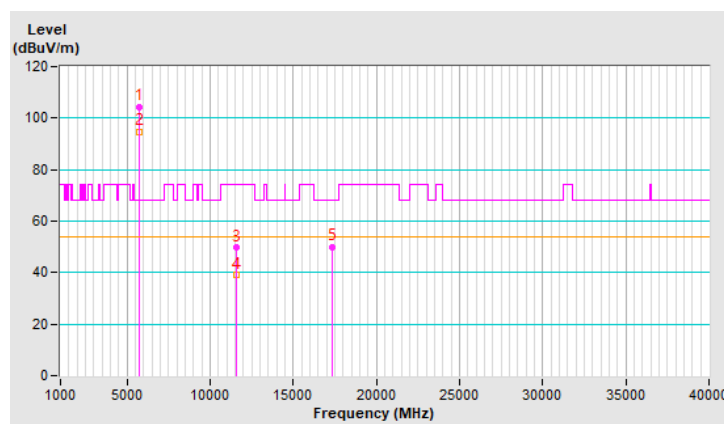


9.6.2 接收諧波

操作模式：	接收		
基本波頻率：	CH 165 : 5825 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3883.33	41.8 PK	74.0	-32.2	1.65 H	127	40.9	0.9
2	3883.33	32.1 AV	54.0	-21.9	1.65 H	127	31.2	0.9
3	7766.67	47.4 PK	74.0	-26.6	2.58 H	164	38.6	8.8
4	7766.67	33.5 AV	54.0	-20.5	2.58 H	164	24.7	8.8
5	11650.00	53.9 PK	74.0	-20.1	1.78 H	98	40.6	13.3
6	11650.00	42.8 AV	54.0	-11.2	1.78 H	98	29.5	13.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

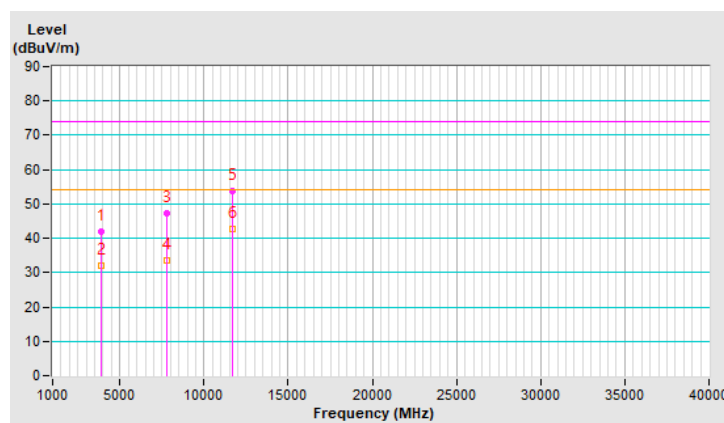


操作模式：	接收		
基本波頻率：	CH 165 : 5825 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3883.33	41.7 PK	74.0	-32.3	2.24 V	215	40.8	0.9
2	3883.33	31.8 AV	54.0	-22.2	2.24 V	215	30.9	0.9
3	7766.67	47.5 PK	74.0	-26.5	1.66 V	68	38.7	8.8
4	7766.67	34.3 AV	54.0	-19.7	1.66 V	68	25.5	8.8
5	11650.00	53.1 PK	74.0	-20.9	1.26 V	249	39.8	13.3
6	11650.00	42.3 AV	54.0	-11.7	1.26 V	249	29.0	13.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

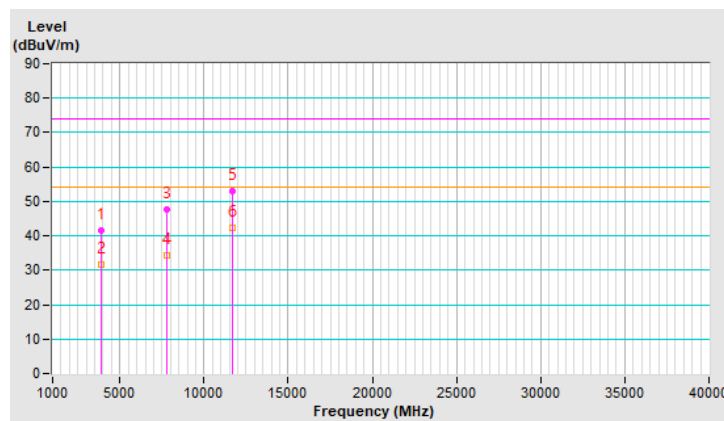

9.6.3 其它不必要之訊號


802.11a

操作模式：	發射接收	調變技術：	OFDM
基本波頻率：	CH 165：5825 MHz	測試儀器：	(QP) RB=120kHz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 9 月 16 日	測試者：	楊立豪

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.43	28.8 QP	40.0	-11.2	3.00 H	166	37.7	-8.9
2	90.00	27.2 QP	43.5	-16.3	1.00 H	155	40.4	-13.2
3	160.26	32.1 QP	43.5	-11.4	2.00 H	199	38.9	-6.8
4	199.11	40.0 QP	43.5	-3.5	1.00 H	307	50.1	-10.1
5	243.85	32.5 QP	46.0	-13.5	1.50 H	180	40.6	-8.1
6	897.83	41.6 QP	46.0	-4.4	1.50 H	238	34.3	7.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

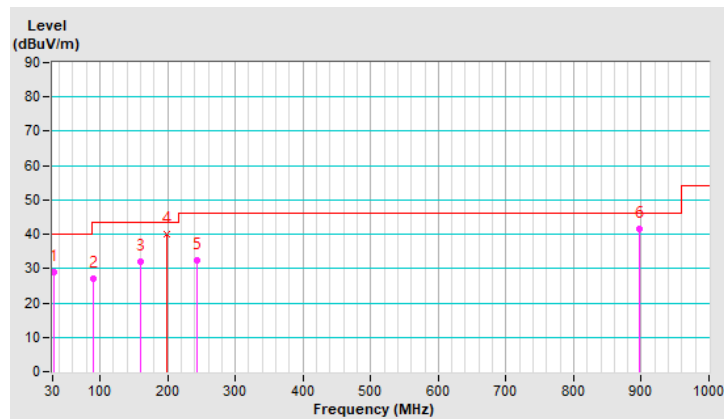


操作模式：	發射接收	調變技術：	OFDM
基本波頻率：	CH 165：5825 MHz	測試儀器：	(QP) RB=120kHz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 9 月 16 日	測試者：	楊立豪

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.00	34.4 QP	40.0	-5.6	1.00 V	26	42.6	-8.2
2	69.90	27.4 QP	40.0	-12.6	1.00 V	165	37.4	-10.0
3	115.22	30.1 QP	43.5	-13.4	1.00 V	224	39.6	-9.5
4	166.00	33.1 QP	43.5	-10.4	1.00 V	251	40.1	-7.0
5	199.23	34.8 QP	43.5	-8.7	1.50 V	297	44.9	-10.1
6	271.65	25.4 QP	46.0	-20.6	1.00 V	239	32.4	-7.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

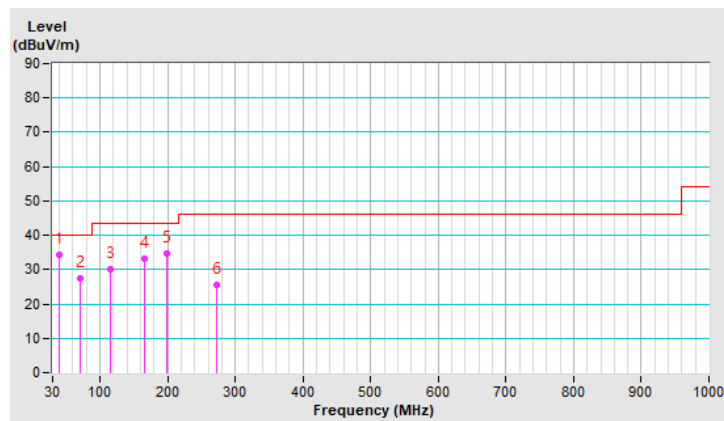

9.7 帶外發射之量測結果 (模式二)

9.7.1 發射諧波


802.11a

操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 36 : 5180 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.8 PK	74.0	-20.2	3.75 H	198	50.1	3.7
2	5150.00	44.0 AV	54.0	-10.0	3.75 H	198	40.3	3.7
3	*5180.00	101.3 PK			3.75 H	198	97.7	3.6
4	*5180.00	93.9 AV			3.75 H	198	90.3	3.6
5	#10360.00	58.6 PK	68.2	-9.6	1.28 H	96	45.9	12.7
6	15540.00	45.3 PK	74.0	-28.7	1.38 H	119	32.1	13.2
7	15540.00	34.0 AV	54.0	-20.0	1.38 H	119	20.8	13.2
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

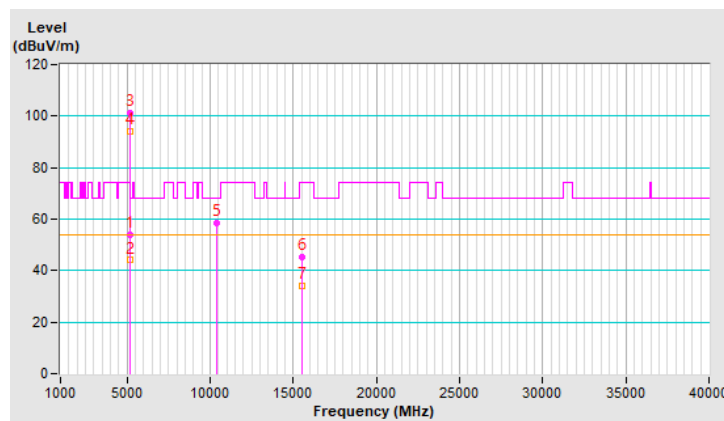


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 36 : 5180 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.16 V	176	54.8	3.7
2	5150.00	50.1 AV	54.0	-3.9	1.16 V	176	46.4	3.7
3	*5180.00	109.6 PK			1.16 V	176	106.0	3.6
4	*5180.00	102.5 AV			1.16 V	176	98.9	3.6
5	#10360.00	64.2 PK	68.2	-4.0	3.76 V	151	51.5	12.7
6	15540.00	46.6 PK	74.0	-27.4	1.75 V	74	33.4	13.2
7	15540.00	34.8 AV	54.0	-19.2	1.75 V	74	21.6	13.2
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

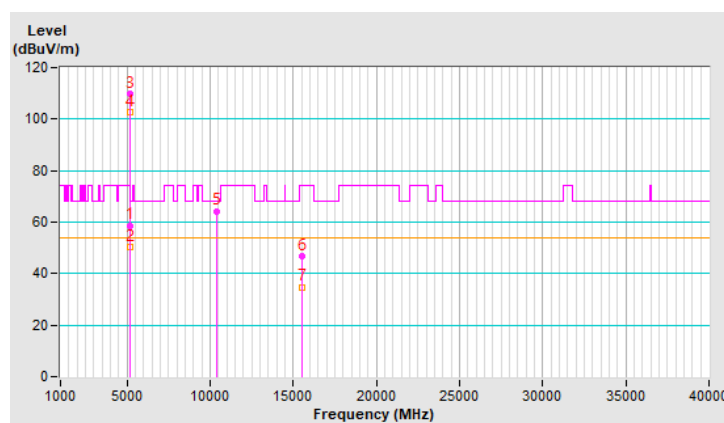


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 40：5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	104.4 PK			3.70 H	207	100.9	3.5
2	*5200.00	95.3 AV			3.70 H	207	91.8	3.5
3	#10400.00	60.3 PK	68.2	-7.9	1.24 H	103	47.5	12.8
4	15600.00	45.1 PK	74.0	-28.9	1.42 H	112	31.6	13.5
5	15600.00	35.7 AV	54.0	-18.3	1.42 H	112	22.2	13.5
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

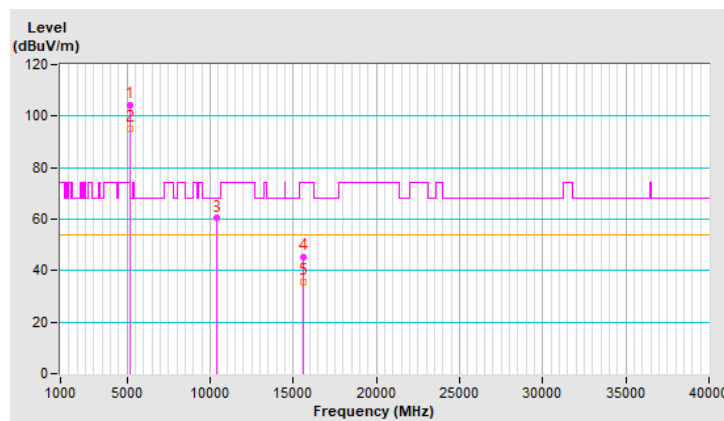


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 40：5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	110.4 PK			1.16 V	178	106.9	3.5
2	*5200.00	103.1 AV			1.16 V	178	99.6	3.5
3	#10400.00	65.1 PK	68.2	-3.1	3.75 V	141	52.3	12.8
4	15600.00	46.6 PK	74.0	-27.4	1.75 V	70	33.1	13.5
5	15600.00	35.9 AV	54.0	-18.1	1.75 V	70	22.4	13.5
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

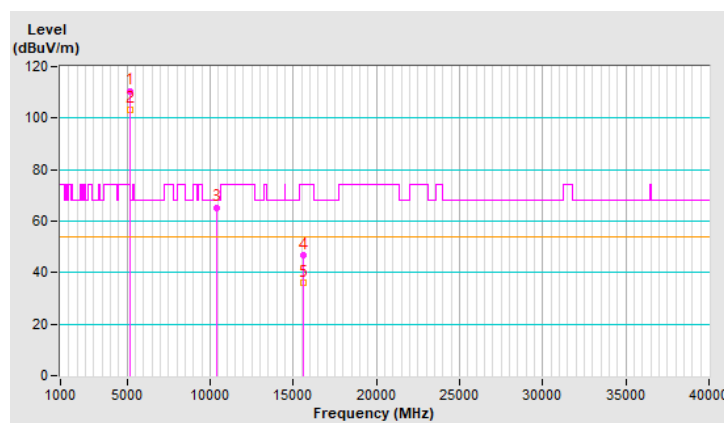


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 48：5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	104.5 PK			3.80 H	183	101.0	3.5
2	*5240.00	96.4 AV			3.80 H	183	92.9	3.5
3	5350.00	53.8 PK	74.0	-20.2	3.80 H	183	50.4	3.4
4	5350.00	44.2 AV	54.0	-9.8	3.80 H	183	40.8	3.4
5	#10480.00	61.5 PK	68.2	-6.7	1.26 H	109	48.4	13.1
6	15720.00	45.5 PK	74.0	-28.5	1.37 H	113	31.7	13.8
7	15720.00	36.2 AV	54.0	-17.8	1.37 H	113	22.4	13.8
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

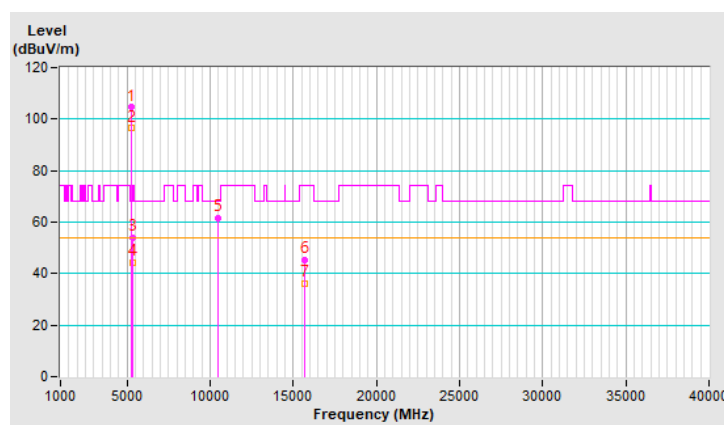


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 48：5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	110.9 PK			1.14 V	170	107.4	3.5
2	*5240.00	104.0 AV			1.14 V	170	100.5	3.5
3	5350.00	58.0 PK	74.0	-16.0	1.14 V	170	54.6	3.4
4	5350.00	49.8 AV	54.0	-4.2	1.14 V	170	46.4	3.4
5	#10480.00	66.6 PK	68.2	-1.6	3.69 V	139	53.5	13.1
6	15720.00	46.5 PK	74.0	-27.5	1.74 V	56	32.7	13.8
7	15720.00	37.0 AV	54.0	-17.0	1.74 V	56	23.2	13.8
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

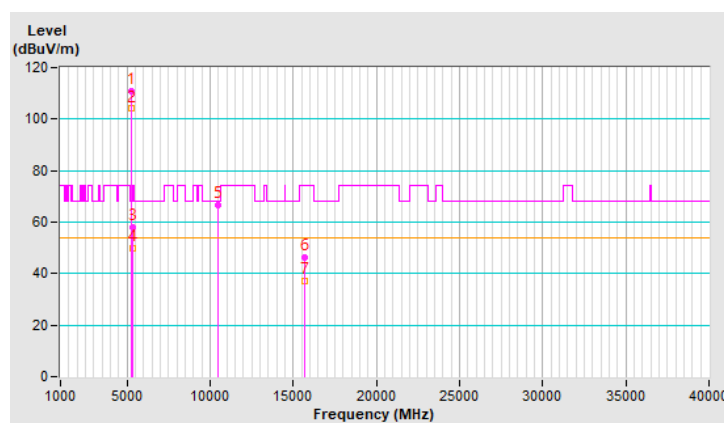


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 52：5260 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.3 PK	74.0	-20.7	1.05 H	125	49.6	3.7
2	5150.00	43.8 AV	54.0	-10.2	1.05 H	125	40.1	3.7
3	*5260.00	105.3 PK			1.05 H	125	101.9	3.4
4	*5260.00	97.3 AV			1.05 H	125	93.9	3.4
5	#10520.00	62.3 PK	68.2	-5.9	1.05 H	106	49.2	13.1
6	15780.00	44.9 PK	74.0	-29.1	1.37 H	124	31.4	13.5
7	15780.00	35.7 AV	54.0	-18.3	1.37 H	124	22.2	13.5
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

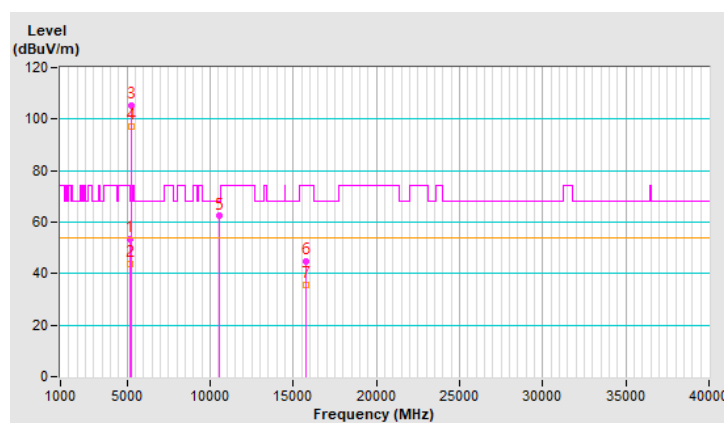


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 52：5260 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.8 PK	74.0	-18.2	1.12 V	138	52.1	3.7
2	5150.00	47.9 AV	54.0	-6.1	1.12 V	138	44.2	3.7
3	*5260.00	111.1 PK			1.12 V	138	107.7	3.4
4	*5260.00	104.5 AV			1.12 V	138	101.1	3.4
5	#10520.00	63.2 PK	68.2	-5.0	3.98 V	99	50.1	13.1
6	15780.00	47.0 PK	74.0	-27.0	1.71 V	38	33.5	13.5
7	15780.00	37.5 AV	54.0	-16.5	1.71 V	38	24.0	13.5
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

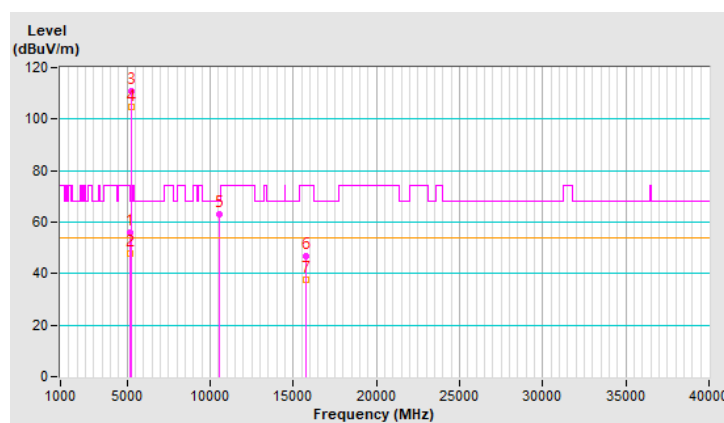


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 60：5300 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	105.6 PK			1.11 H	122	102.3	3.3
2	*5300.00	97.8 AV			1.11 H	122	94.5	3.3
3	10600.00	62.6 PK	74.0	-11.4	1.00 H	122	49.7	12.9
4	10600.00	52.7 AV	54.0	-1.3	1.00 H	122	39.8	12.9
5	15900.00	44.9 PK	74.0	-29.1	1.38 H	115	32.1	12.8
6	15900.00	35.8 AV	54.0	-18.2	1.38 H	115	23.0	12.8
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

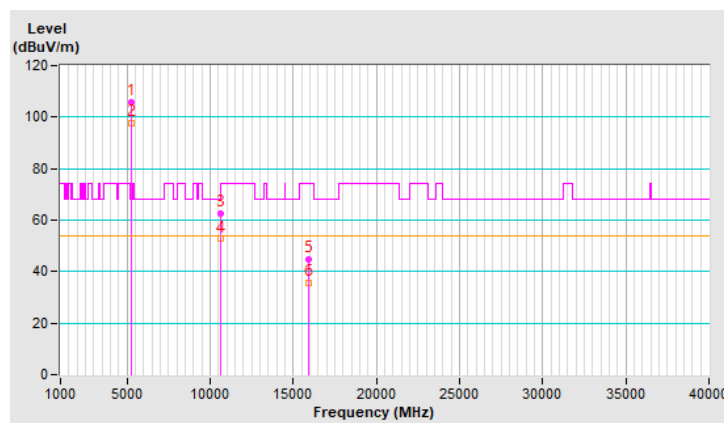


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 60：5300 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	111.5 PK			1.08 V	132	108.2	3.3
2	*5300.00	104.8 AV			1.08 V	132	101.5	3.3
3	10600.00	63.6 PK	74.0	-10.4	4.00 V	113	50.7	12.9
4	10600.00	52.8 AV	54.0	-1.2	4.00 V	113	39.9	12.9
5	15900.00	47.5 PK	74.0	-26.5	1.71 V	45	34.7	12.8
6	15900.00	38.0 AV	54.0	-16.0	1.71 V	45	25.2	12.8
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

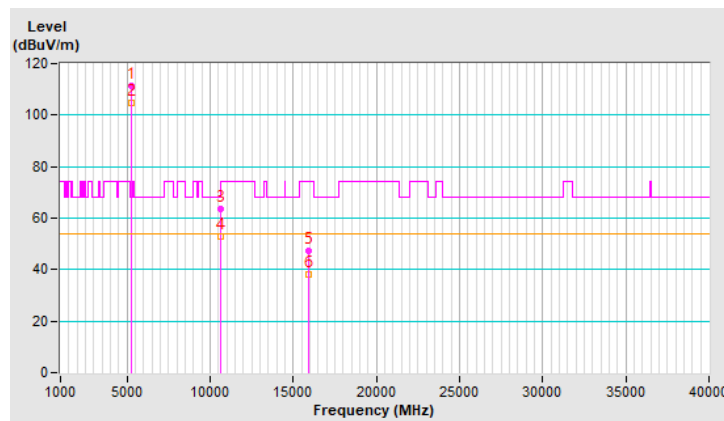


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 64：5320 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	102.3 PK			3.62 H	202	98.9	3.4
2	*5320.00	94.2 AV			3.62 H	202	90.8	3.4
3	5350.00	51.0 PK	74.0	-23.0	3.62 H	202	47.6	3.4
4	5350.00	43.0 AV	54.0	-11.0	3.62 H	202	39.6	3.4
5	10640.00	62.7 PK	74.0	-11.3	1.03 H	119	49.8	12.9
6	10640.00	52.8 AV	54.0	-1.2	1.03 H	119	39.9	12.9
7	15960.00	44.8 PK	74.0	-29.2	1.37 H	118	32.0	12.8
8	15960.00	35.6 AV	54.0	-18.4	1.37 H	118	22.8	12.8
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

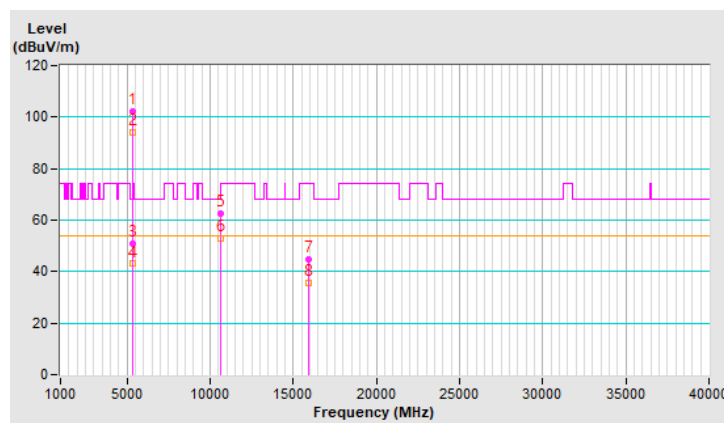


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 64：5320 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.2 PK			1.09 V	96	107.8	3.4
2	*5320.00	102.8 AV			1.09 V	96	99.4	3.4
3	5350.00	59.4 PK	74.0	-14.6	1.09 V	96	56.0	3.4
4	5350.00	49.3 AV	54.0	-4.7	1.09 V	96	45.9	3.4
5	10640.00	63.8 PK	74.0	-10.2	4.00 V	115	50.9	12.9
6	10640.00	53.0 AV	54.0	-1.0	4.00 V	115	40.1	12.9
7	15960.00	47.5 PK	74.0	-26.5	1.68 V	51	34.7	12.8
8	15960.00	38.0 AV	54.0	-16.0	1.68 V	51	25.2	12.8
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

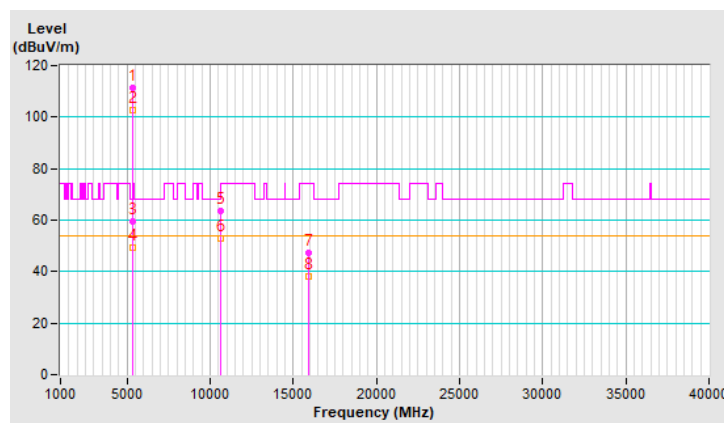


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 100 : 5500 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.9 PK	74.0	-20.1	1.00 H	134	50.1	3.8
2	5460.00	44.7 AV	54.0	-9.3	1.00 H	134	40.9	3.8
3	#5468.48	53.7 PK	68.2	-14.5	1.00 H	134	49.8	3.9
4	*5500.00	103.3 PK			1.00 H	134	99.4	3.9
5	*5500.00	96.3 AV			1.00 H	134	92.4	3.9
6	11000.00	62.0 PK	74.0	-12.0	1.05 H	148	49.0	13.0
7	11000.00	52.5 AV	54.0	-1.5	1.05 H	148	39.5	13.0
8	#16500.00	44.9 PK	68.2	-23.3	1.32 H	94	30.3	14.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

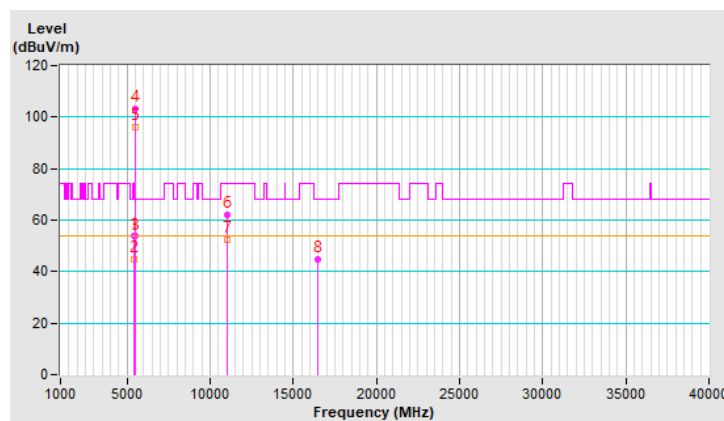


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 100：5500 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.0 PK	74.0	-13.0	1.15 V	129	57.2	3.8
2	5460.00	50.0 AV	54.0	-4.0	1.15 V	129	46.2	3.8
3	#5470.00	66.3 PK	68.2	-1.9	1.15 V	129	62.4	3.9
4	*5500.00	109.1 PK			1.15 V	129	105.2	3.9
5	*5500.00	102.1 AV			1.15 V	129	98.2	3.9
6	11000.00	63.3 PK	74.0	-10.7	4.00 V	122	50.3	13.0
7	11000.00	52.4 AV	54.0	-1.6	4.00 V	122	39.4	13.0
8	#16500.00	47.4 PK	68.2	-20.8	1.71 V	40	32.8	14.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

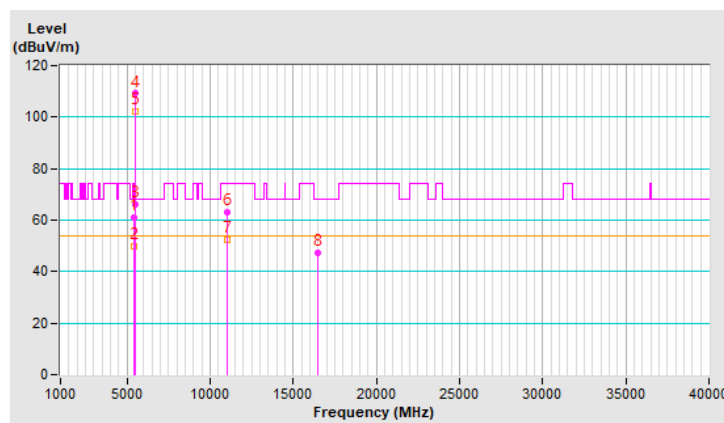


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 116 : 5580 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	106.3 PK			1.08 H	124	102.5	3.8
2	*5580.00	98.6 AV			1.08 H	124	94.8	3.8
3	11160.00	62.9 PK	74.0	-11.1	1.00 H	118	49.8	13.1
4	11160.00	53.1 AV	54.0	-0.9	1.00 H	118	40.0	13.1
5	#16740.00	45.2 PK	68.2	-23.0	1.36 H	129	29.0	16.2
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

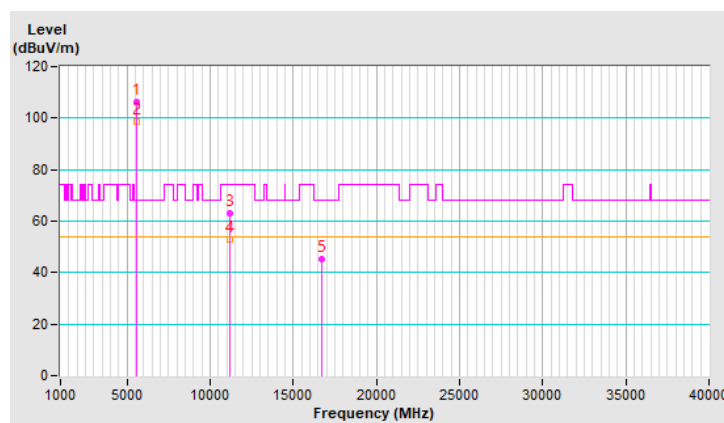


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 116：5580 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	111.7 PK			1.16 V	148	107.9	3.8
2	*5580.00	105.4 AV			1.16 V	148	101.6	3.8
3	11160.00	64.0 PK	74.0	-10.0	3.99 V	103	50.9	13.1
4	11160.00	53.3 AV	54.0	-0.7	3.99 V	103	40.2	13.1
5	#16740.00	47.4 PK	68.2	-20.8	1.72 V	53	31.2	16.2
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

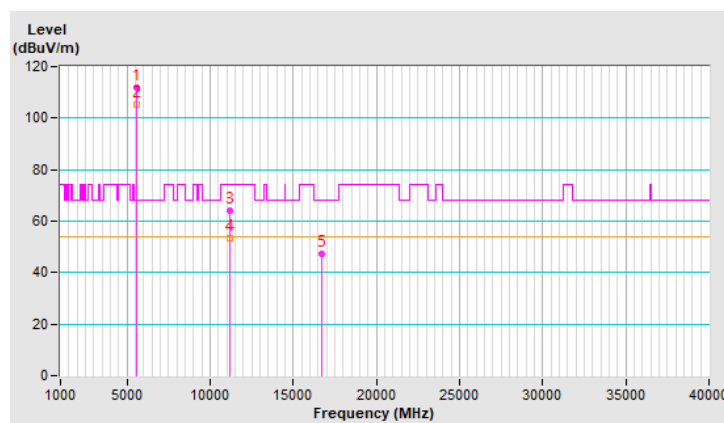


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 140：5700 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	105.8 PK			1.07 H	110	101.8	4.0
2	*5700.00	97.4 AV			1.07 H	110	93.4	4.0
3	#5725.00	55.4 PK	68.2	-12.8	1.07 H	110	51.4	4.0
4	11400.00	62.9 PK	74.0	-11.1	1.00 H	114	49.7	13.2
5	11400.00	52.9 AV	54.0	-1.1	1.00 H	114	39.7	13.2
6	#17100.00	44.9 PK	68.2	-23.3	1.38 H	127	27.7	17.2
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

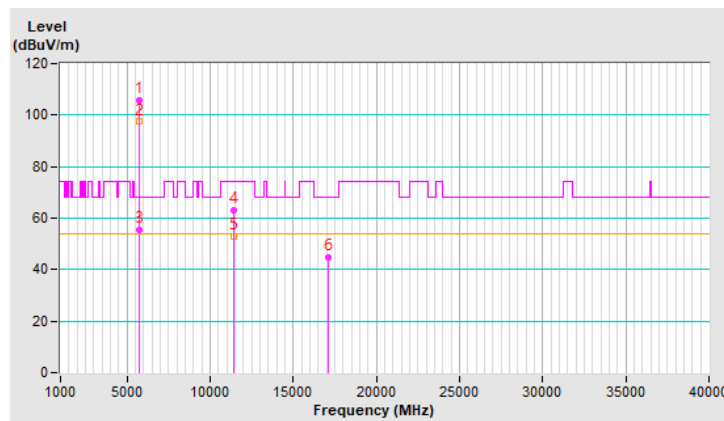


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 140：5700 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.4 PK			1.11 V	110	107.4	4.0
2	*5700.00	104.1 AV			1.11 V	110	100.1	4.0
3	#5725.00	65.3 PK	68.2	-2.9	1.11 V	110	61.3	4.0
4	11400.00	62.7 PK	74.0	-11.3	3.98 V	133	49.5	13.2
5	11400.00	51.9 AV	54.0	-2.1	3.98 V	133	38.7	13.2
6	#17100.00	47.2 PK	68.2	-21.0	1.65 V	53	30.0	17.2
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

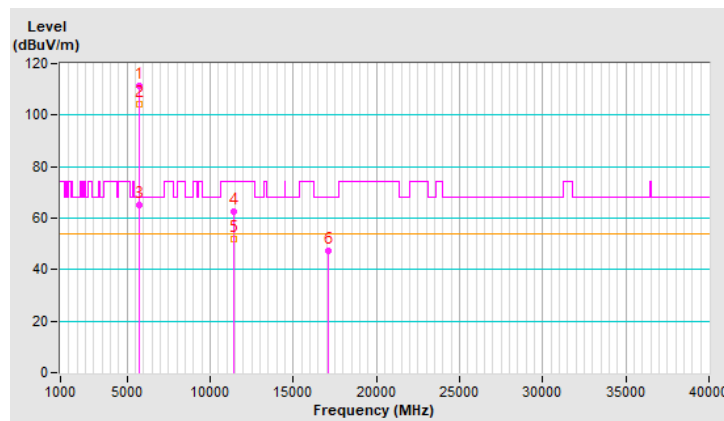


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 144 : 5720 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.5 PK	74.0	-23.5	1.05 H	129	46.7	3.8
2	5460.00	40.8 AV	54.0	-13.2	1.05 H	129	37.0	3.8
3	#5470.00	51.3 PK	68.2	-16.9	1.05 H	129	47.4	3.9
4	*5720.00	105.6 PK			1.05 H	129	101.7	3.9
5	*5720.00	97.8 AV			1.05 H	129	93.9	3.9
6	#5850.00	61.0 PK	68.2	-7.2	1.05 H	129	56.6	4.4
7	11440.00	62.2 PK	74.0	-11.8	1.06 H	148	48.9	13.3
8	11440.00	52.6 AV	54.0	-1.4	1.06 H	148	39.3	13.3
9	#17160.00	45.5 PK	68.2	-22.7	1.36 H	107	28.1	17.4
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

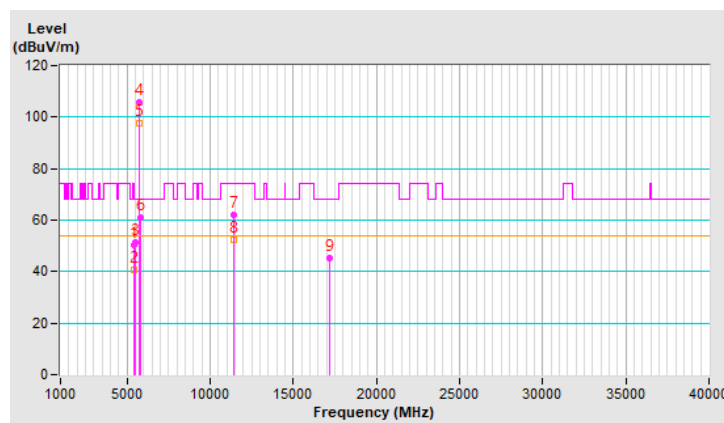


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 144 : 5720 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.1 PK	74.0	-22.9	1.13 V	140	47.3	3.8
2	5460.00	41.0 AV	54.0	-13.0	1.13 V	140	37.2	3.8
3	#5470.00	52.0 PK	68.2	-16.2	1.13 V	140	48.1	3.9
4	*5720.00	111.9 PK			1.13 V	140	108.0	3.9
5	*5720.00	104.9 AV			1.13 V	140	101.0	3.9
6	#5850.00	61.4 PK	68.2	-6.8	1.13 V	140	57.0	4.4
7	11440.00	63.7 PK	74.0	-10.3	4.00 V	100	50.4	13.3
8	11440.00	52.9 AV	54.0	-1.1	4.00 V	100	39.6	13.3
9	#17160.00	48.1 PK	68.2	-20.1	1.77 V	61	30.7	17.4
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

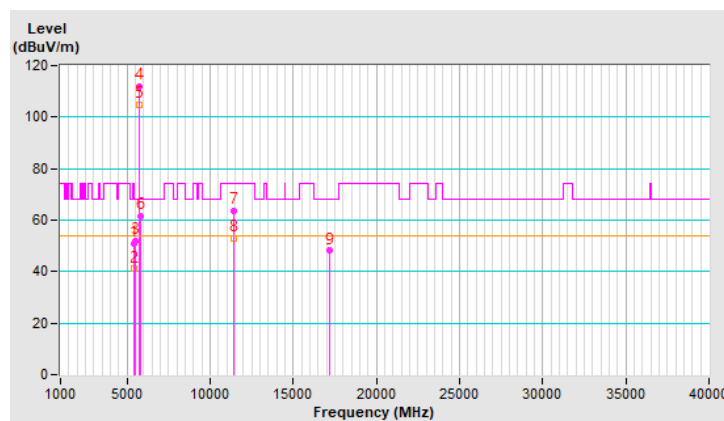

操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 149：5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	103.5 PK			1.00 H	175	99.5	4.0
2	*5745.00	96.3 AV			1.00 H	175	92.3	4.0
3	11490.00	58.8 PK	74.0	-15.2	1.14 H	76	45.5	13.3
4	11490.00	47.5 AV	54.0	-6.5	1.14 H	76	34.2	13.3
5	#17235.00	46.0 PK	68.2	-22.2	1.38 H	122	28.4	17.6
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

