

NCC 低功率射頻電機型式試驗報告

報告編號: WD-RN-R-190544-A0

產品名稱 : USPs 按鍵設備組件
型號 : KDOM-019BD
申請者 : 台灣三星電子股份有限公司
收件日期 : 108 年 08 月 16 日
測試日期 : 108 年 08 月 20 日 ~ 108 年 08 月 27 日
法規 : 低功率射頻電機技術規範(LP0002) 107 年 1 月 10 日修訂版



穩得實業股份有限公司 穩得電性測試實驗室

注意:

本測試報告只針對待測設備樣品有效。報告中所描述之測試結果和待測設備的架構組合，均根據樣品實際的量測情況作詳實的記錄。

本測試報告內之測試結果可藉由測試儀器設備之校正報告與本報告內所評估量測不確定度追溯至國家或國際標準。

本實驗室依據測試標準規定進行測試，在進行符合性分析時，不考慮量測不確定度的貢獻，依此判定規則出具測試報告。

本測試報告非經穩得電信實驗室同意不可複製使用，但全份複製除外。

低功率射頻電機型式試驗報告

報告發行日期: 108年08月28日


案件編號: 19Q081609

產品名稱	USPs 按鍵設備組件
廠牌	Kumoh
廠牌商標	
型號	KDOM-019BD
申請者	台灣三星電子股份有限公司
製造商	KUMOH Electronics Co.,Ltd
待測物額定電壓	DC 5V
待測物測試電壓	DC 5V
待測物支援無線應用	Bluetooth LE Wireless Charging 531KHz
適用法規	低功率射頻電機技術規範(LP0002) 107 年 1 月 10 日修訂版
輸出功率	-4.41dBm
測試結果	合格

報告製作

測試工程師

報告簽署人



(專員 / 呂月蟬)



(副課長 / 張智勝)



(專案經理 / 吳明政)

報告內容

文件修改歷程.....	5
測試結果總結.....	6
1 待測物相關資訊.....	7
1.1 申請者資訊.....	7
1.2 製造商資訊.....	7
1.3 待測物基本資訊.....	7
1.4 待測物架構.....	9
1.5 待測物軟體設定.....	9
1.6 周邊列表.....	10
1.7 試驗單位與測試環境.....	11
1.8 測量不確定度.....	11
1.9 測試設備清單.....	12
2 各測試項目測試結果.....	15
2.1 天線要求.....	15
2.1.1 天線增益限制.....	15
2.1.2 測試結果.....	15
2.2 峰值傳導輸出功率.....	16
2.2.1 限制值.....	16
2.2.2 測試架構.....	16
2.2.3 測試流程.....	16
2.2.4 測試結果.....	17
2.3 6 dB 頻寬.....	18
2.3.1 限制值.....	18
2.3.2 測試架構.....	18
2.3.3 測試流程.....	18
2.3.4 測試結果.....	19
2.4 功率頻譜密度.....	20
2.4.1 限制值.....	20
2.4.2 測試架構.....	20
2.4.3 測試流程.....	20
2.4.4 測試結果.....	21
2.5 帶外傳導發射限制.....	22
2.5.1 限制值.....	22
2.5.2 測試架構.....	22
2.5.3 測試流程.....	22
2.5.4 測試結果.....	23
2.6 不必要之發射.....	26
2.6.1 限制值.....	26
2.6.2 測試架構.....	27
2.6.3 測試流程.....	28

2.6.4	工作週期	29
2.6.5	輻射頻帶邊緣測試	29
2.6.6	輻射雜散發射測試	34
2.7	電源線傳導干擾.....	47
2.7.1	限制值	47
2.7.2	測試架構	47
2.7.3	測試流程	48
2.7.4	測試結果	49
附件 1: 待測物測試擺設相片		
附件 2: 待測物內部相片		

文件修改歷程

報告編號	發行日期	描述
WD-RN-R-190544-A0	108年08月28日	初始報告

測試結果總結

參考法規章節	測試項目	測試結果
LP0002 3.10.1.3	天線要求	合格
LP0002 3.10.1.2	峰值傳導輸出功率	合格
LP0002 3.10.1.6	6dB 頻寬	合格
LP0002 3.10.1.6	功率頻譜密度	合格
LP0002 3.10.1.5	帶外發射限制	合格
LP0002 2.3	電源線傳導干擾	合格

1 待測物相關資訊

1.1 申請者資訊

台灣三星電子股份有限公司
臺北市內湖區瑞光路 399 號 10 樓之 1

1.2 製造商資訊

KUMOH Electronics Co.,Ltd
35, Gilju-ro 444beon-gil,Bucheon-si,Gyeonggi-do (Seoul 14556 Korea)

1.3 待測物基本資訊

產品名稱	USPs 按鍵設備組件
型號	KDOM-019BD
操作頻率範圍	2402 ~ 2480 MHz
頻道數	40CH
調變方式	GFSK(1 Mbps)
頻道分離	2 MHz
天線資訊	Refer to the table “Antenna List”
待測物支援無線應用	Bluetooth LE Wireless Charging 531KHz
待測物額定電壓	DC 5V
待測物測試電壓	DC 5V

Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	N/A	N/A	PCB Antenna	5.3 dBi for 2.4 GHz

Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480


Test Mode

Mode 1	Transmit BLE
Mode 2	Receiver BLE
Mode 3	Normal Link

備註:

1. 這些測試是在設備樣本上進行，目的是證明符合 LP0002 3.10.1 章節。
2. 選擇低、中和最高操作頻率來執行測試。
3. 輻射測量在 X，Y，Z 軸定位中進行，只有最差(X 軸)的情況才會顯示在報告中。

1.4 待測物架構

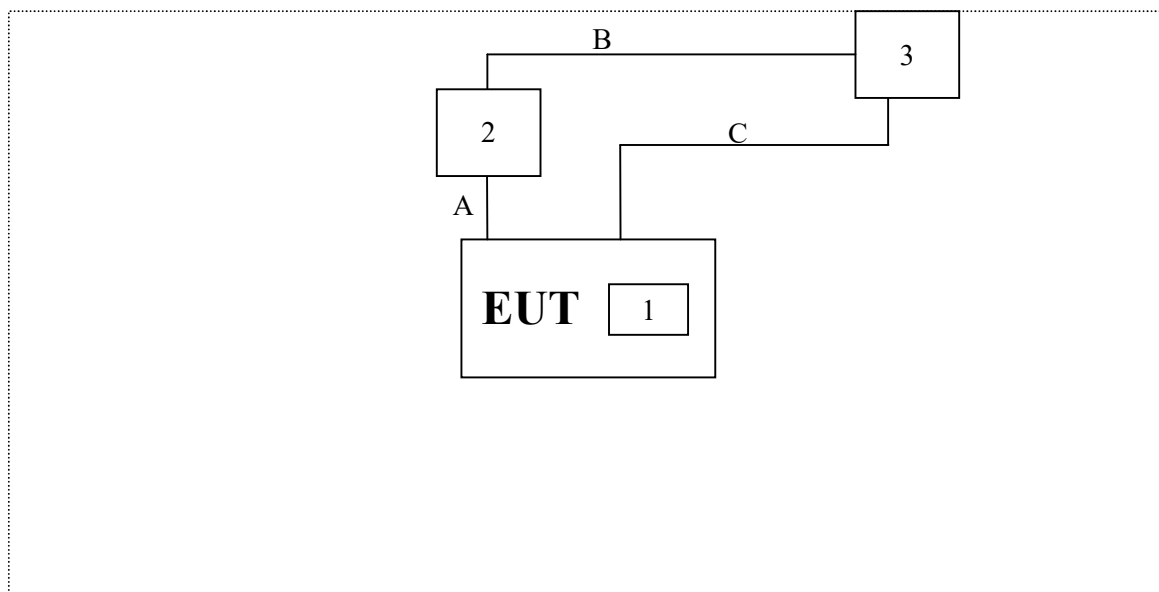

Test Table

1.5 待測物軟體設定

1. 測試配置如上圖 1.4 所示
2. 開啟定頻程式 “SmartRF_Studio 2.14.0”.
3. 確認頻率及訊號正確
4. 功能無誤後開始測試

1.6 周邊列表

所有設備的類型，以及測試系統中使用的所有電纜（包括插入的卡）的描述如下：

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	S-Pan	SAMSUNG	EN-PN960	N/A	N/A
2	Fixture	TEXAS INSTRUMENTS	N/A	N/A	N/A
3	Notebook PC	acer	N16Q1	NXVD4TA023742254707600	Non-shielded, 1 Core, 0.8m

No.	Signal Cable Type	Signal cable Description
A	Data Cable	Non-shielded, Non-Core, 0.3m
B	USB Cable	Non-shielded, Non-Core, 0.5m
C	USB Cable	Non-shielded, Non-Core, 1.5m

1.7 試驗單位與測試環境

實驗室環境:

項目	實際測試條件
溫度 (°C)	25
濕度 (% RH)	65
大氣壓力 (mbar)	1001

財團法人全國認證基金會 認證

認證編號: 2965

機構名稱: 穩得實業股份有限公司

機構地址: 新北市新店區寶橋路 188 號 6 樓/ 6F-1 號

實驗室名稱: 穩得電性測試實驗室

實驗室地址: 新北市土城區石門路 67-9 號

1.8 測量不確定度

ISO / IEC 17025 要求在報告中，包含排放測試結果相關測量不確定度的估算值。

下面給出的測量不確定度基於 95%信賴水準，覆蓋因子 $K = 2$ 。

Measurement Project	Measuring Range	Expended Uncertainty
AC Conducted Emission	0.150 ~ 30 MHz	2.9 dB
Radiated Emission	0.009 ~ 30 MHz	3.8 dB
	30 ~ 1000 MHz	3.5 dB
	1000 ~ 18000 MHz	3.7 dB
	18000 ~ 40000 MHz	3.8 dB
Unwanted Emission Strength Measurement	1000 ~ 6000 MHz	2.5 dB
RF Power, Conducted	1000 ~ 6000 MHz	1.3 dB
Occupied Bandwidth	1000 ~ 6000 MHz	3 %
Power Density	1000 ~ 6000 MHz	1.4 dB
Duty Cycle	1000 ~ 6000 MHz	1.1 %
DC Power Supply	0.5 ~ 30 V	1.7 %
Temperature	15 ~ 30 °C	0.8 °C
Humidity	40 ~ 80 %	3.8 %

備註：本實驗室依據測試標準規定進行測試，在進行符合性分析時，不考慮量測不確定度的貢獻，依此判定規則出具測試報告。

1.9 測試設備清單

For Conducted measurements / RF Conducted Measurement Room

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ Spectrum analyzer	Keysight	N9010A	MY54200737	2018/10/24	2019/10/23
✓ Wideband Peak Power Meter	Anritsu	ML2495A	1733007	2018/10/25	2019/10/24
✓ Pulse Power Sensor + Precision Adaptor	Anritsu	MA2411B	1726022	2018/10/25	2019/10/24
Temperature Chamber	TAICHY	MHK-225LK	1061121	2019/4/29	2020/4/28
Wireless Connectivity Tester	R&S	CMW270	101307	2019/4/24	2020/4/23
✓ Attenuator	MVE	MVE2211-10	CT-9-056	2019/8/22	2020/8/21
Attenuator	MVE	MVE2211-20	CT-9-057	2019/8/22	2020/8/21
Attenuator	MVE	MVE2211-30	CT-9-058	2019/8/22	2020/8/21
Power Divider	MVE	MVE8546	170826003	2018/8/9	2019/8/8
Power Splitter	MVE	MVE8547	170302047	2018/8/9	2019/8/8
DC Power Supply	GW INSTEK	GPC-3060D	GER817636	2018/8/9	2019/8/8

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.

For AC Conduction measurements / Conducted Room

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	EMI Test Receiver	R&S	ESR3	102309	2019/5/16	2020/5/15
✓	2-Line V-Network LISN	R&S	ENV216	101185	2019/5/20	2020/5/19
✓	LISN	SCHWARZBECK	NSLK 8127RC	05028	2019/5/20	2020/5/19
✓	Transient Limiter	EM Electronics Corporation	EM-7600	857	2019/5/16	2020/5/15
✓	50ohm Cable	EMCI	EMCCFD300-BM-BM-5000	170613	2019/5/16	2020/5/15
✓	50 ohm terminal impedance	HUBER+SUHNER	50 ohm terminal impedance	CT-1-109-1	2019/5/13	2020/5/12

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.EMC-CON 3A1

For Radiated measurements / 9x6x6 Semi Anechoic Room

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	Spectrum Analyzer	Keysight	N9010A	MY52220228	2019/4/25	2020/4/24
✓	EMI Receiver	Keysight	N9038A	MY51210173	2018/12/5	2019/12/4
✓	Pre-Amplifier	EMEC	EMC330	060668	2018/10/16	2019/10/15
✓	Pre-Amplifier	EMCI	EMC051845SE	980525	2018/10/11	2019/10/10
✓	Pre-Amplifier	EMCI	EMC184045SE	980515	2018/10/10	2019/10/9
✓	Pre-Amplifier	EMEC	EM01G18G	060648	2018/10/11	2019/10/10
✓	Cable	EMEC	EM-CB400	105060103	2018/10/18	2019/10/17
✓	Cable	EMEC	EM-CB400	105060102	2018/10/18	2019/10/17
✓	Cable	EMEC	EM-CB400	105060101	2018/10/18	2019/10/17
✓	Cable	EMCI	EMC102-KM-KM-600	170637	2018/10/10	2019/10/9
✓	Cable	HUBER+SUHNER	SF102	MY2751/2	2018/10/10	2019/10/9
✓	Cable	EMCI	EMC102-KM-KM-3000	170635	2018/10/10	2019/10/9
✓	Loop Antenna	EMCI	LPA600	277	2019/7/24	2020/7/23
✓	TRILOG super broad Antenna	Schwarzbeck	VULB 9168	VULB 9168-700 & 1421	2018/10/19	2019/10/18
✓	Horn Antenna	Schwarzbeck	BBHA 9120D	01557	2018/10/9	2019/10/8
✓	Horn Antenna	Schwarzbeck	BBHA 9170	703	2018/10/11	2019/10/10
✓	RF Filter	EMEC	BRF-2400-2500	002	2018/10/10	2019/10/9
	RF Filter	EMEC	BRF-5150-5350	104	2018/10/10	2019/10/9
	RF Filter	EMEC	BRF-5470-5725	092	2018/10/10	2019/10/9
	RF Filter	EMEC	BRF-5725-5875	091	2018/10/10	2019/10/9
✓	RF Filter	EMEC	HPF-2800	002	2018/10/10	2019/10/9
	RF Filter	EMEC	HPF-5850	059	2018/10/10	2019/10/9

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.WD-03A1-1

2 各測試項目測試結果

2.1 天線要求

2.1.1 天線增益限制

1. 操作於 2400 MHz~2483.5 MHz 頻段：
 - (A) 進行固定式點對點操作時，其發射天線之方向性增益超過 6 dBi，每超過 3 dBi，最大傳導輸出功率限制值應降低 1 dB。
 - (B) 天線以多向波束發射方式(含同時發射或循序發射)將訊號導向多個接收機或接收機群組時，應符合下列規定：
 - (a) 非同時發射多向波束者，所有載波或頻道傳輸至所有天線陣列或陣列群之總和傳導輸出功率應符合 3.10.1.2 之功率限制值。如天線/天線陣列群之方向性增益超過 6 dBi，每超過 3 dBi，總和傳導輸出功率限制值應降低 1 dB。方向性增益值應計算如下：
 - (I). 方向性增益值 = $10\log(\text{天線陣列之單元數目}) + \text{各單元中最高之方向性增益值}$ 。
 - (II). 天線陣列間之遮蔽效應或波束干涉損失能充分佐證時，方向性增益得低於(I)計算數值。
 - (b) 同時發射多向波束於相同或不同頻道者，其每一波束功率應符合(a)之功率限制值。如發射波束有重疊現象，功率應降低，以確保總和傳導輸出功率符合(a)之限制值。同時發射的所有波束總和傳導輸出功率不大於(a) 總和傳導輸出功率限制值加 8 dB。方向性增益值計算同(a)。
 - (c) 發射機之天線具備單向波束功能者，應符合 1(A)及 3 後段之規定。
2. 操作頻率為 5725 MHz~5850 MHz 且進行固定式點對點操作時，其發射天線之方向性增益超過 6 dBi，不需降低最大傳導輸出功率。
3. 除 1 及 2 外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率限制值。

2.1.2 測試結果

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	N/A	N/A	PCB Antenna	5.3 dBi for 2.4 GHz


2.2 峰值傳導輸出功率

2.2.1 限制值

- (1) 操作於 2400 MHz~2483.5 MHz 者
 - (A) 至少使用 75 個跳頻頻道之跳頻系統：1 W(含)以下。
 - (B) 除(A)外，依 3.10.1.6 (1)(A)(a)之跳頻系統：0.125 W(含)以下。
 - (C) 數位調變技術系統：1 W(含) 以下。
- (2) 操作於 5725 MHz~5850 MHz 之所有跳頻系統：1 W(含)以下。
- (3) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率限制值。

除使用附件二之峰值輸出功率測量方式外，並得使用以最大傳導輸出功率(Maximum Conducted Output Power)作為測量方式，且應依 3.10.1.3 之方式降低功率限制值。

2.2.2 測試架構



2.2.3 測試流程

待測物之天線埠經由適當之衰減直接連至 Power Meter RF 輸入端。

2.2.4 測試結果

Protocol	Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	00	2402	-4.41	≤ 30	Pass
	19	2440	-5.95	≤ 30	Pass
	39	2480	-6.81	≤ 30	Pass

備註:


1. Peak Power = Reading value on power meter + cable loss
2. $10 \log(X/\text{mW}) = \text{dBm}$, $X=1 \text{ watt}$ (Limit)
1 watt = 30 dBm

2.3 6 dB 頻寬

2.3.1 限制值

6 dB 頻寬至少應有 500 kHz。

2.3.2 測試架構



2.3.3 測試流程

1. Enable the EUT transmit continuously.
2. Spectrum analyzer set:
 - a) RBW = 100 kHz
 - b) VBW $\geq$ 3 RBW
 - c) Detector = peak
 - d) Sweep time = auto couple
 - e) Trace mode = max hold.

2.3.4 測試結果

Protocol	Channel	Frequency (MHz)	6dB BW (kHz)	Limit (kHz)	Result
BLE	00	2402	691.200	≥ 500	Pass
	19	2440	683.200		Pass
	39	2480	692.400		Pass



2.4 功率頻譜密度

2.4.1 限制值

在使用頻率範圍之任一 3 kHz 頻寬內，由發射機傳導至天線之功率頻譜密度在任意傳輸期間內，皆小於或等於 8 毫分貝(dBm)。

2.4.2 測試架構




2.4.3 測試流程

1. Enable the EUT transmit continuously.
2. Spectrum analyzer set:
 - a) RBW = 3 kHz
 - b) VBW $\geq$ 3 RBW
 - c) Span = 1.5 times DTS Channel 6dB Bandwidth
 - d) Detector = peak
 - e) Sweep time = auto couple
 - f) Trace mode = max hold.

2.4.4 測試結果

Protocol	Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Result
BLE	00	2402	-16.212	≤ 8	Pass
	19	2440	-17.999		Pass
	39	2480	-20.280		Pass

Remark: PSD = Reading value on spectrum analyzer + cable loss

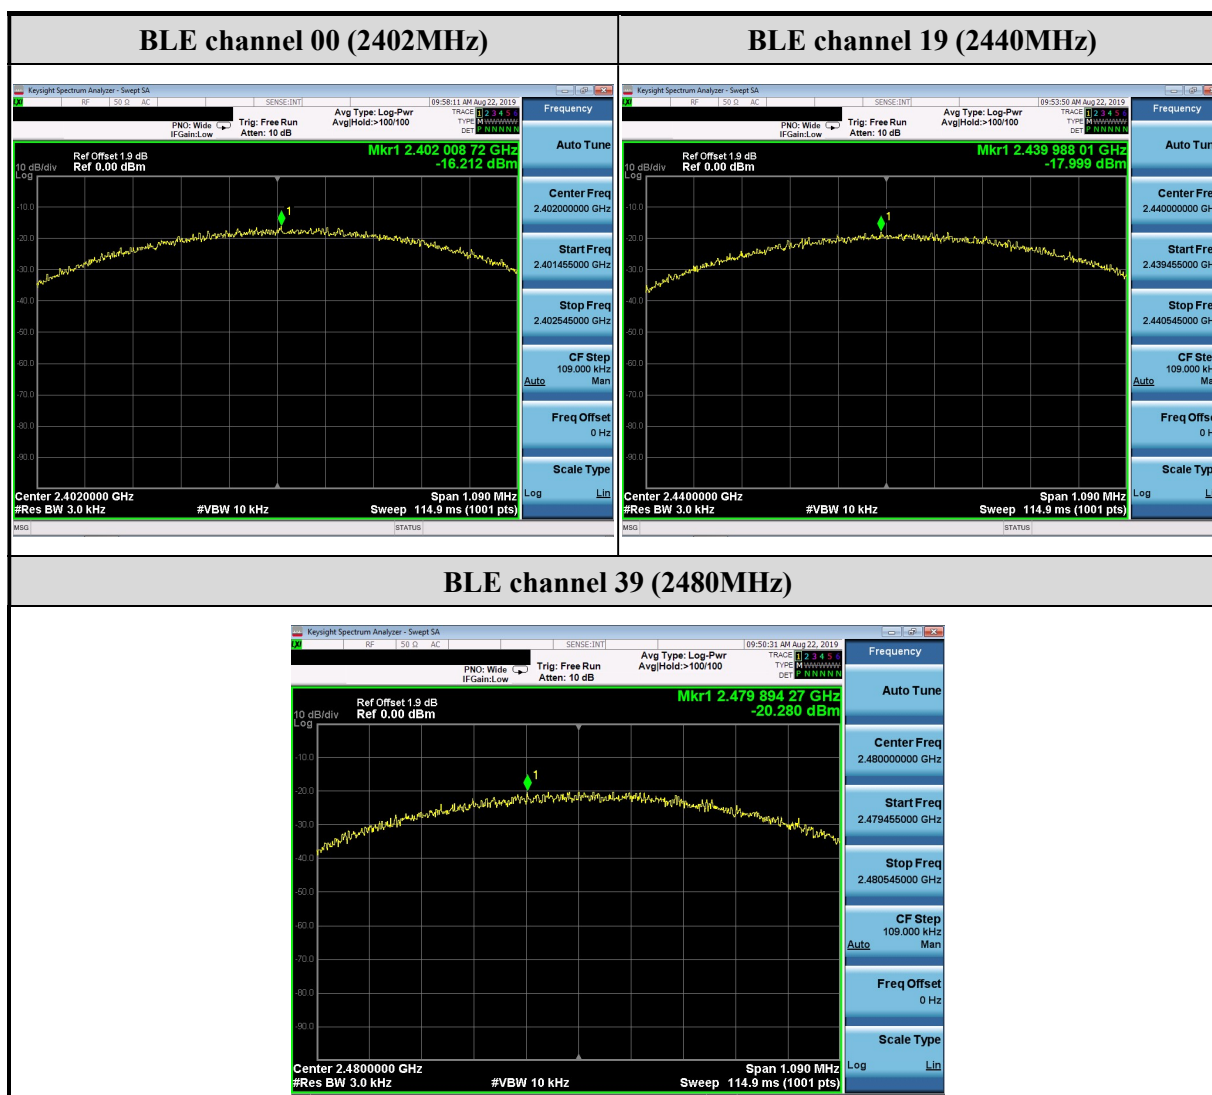

2.5 帶外傳導發射限制

2.5.1 限制值

操作頻帶範圍外之任意 100 kHz 內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 kHz 內的射頻功率，其衰減值限制如下：

1. 輸出功率以附件二之峰值輸出功率方式測量者，至少須衰減 20 dB，可使用射頻傳導或輻射方式測量。
2. 輸出功率以 3.10.1.2(1)(C)之最大傳導輸出功率測量方式者，至少須衰減 30 dB。

2.5.2 測試架構




2.5.3 測試流程

1. Enable the EUT transmit continuously.
2. Spectrum analyzer set :
 - a) RBW = 100 kHz
 - b) VBW $\geq$ 3 RBW
 - c) Detector = peak
 - d) Sweep time = auto couple
 - e) Trace mode = max hold.

2.5.4 測試結果



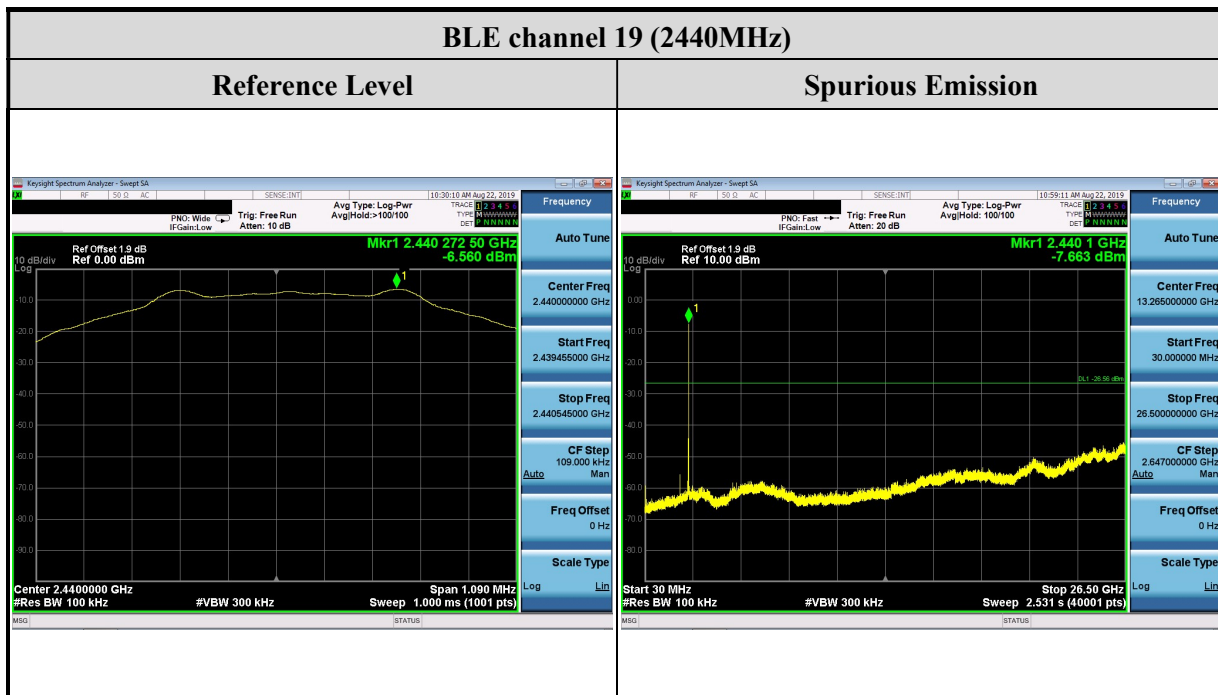

BLE channel 39 (2480MHz)


Reference Level



Spurious Emission



Band Edge

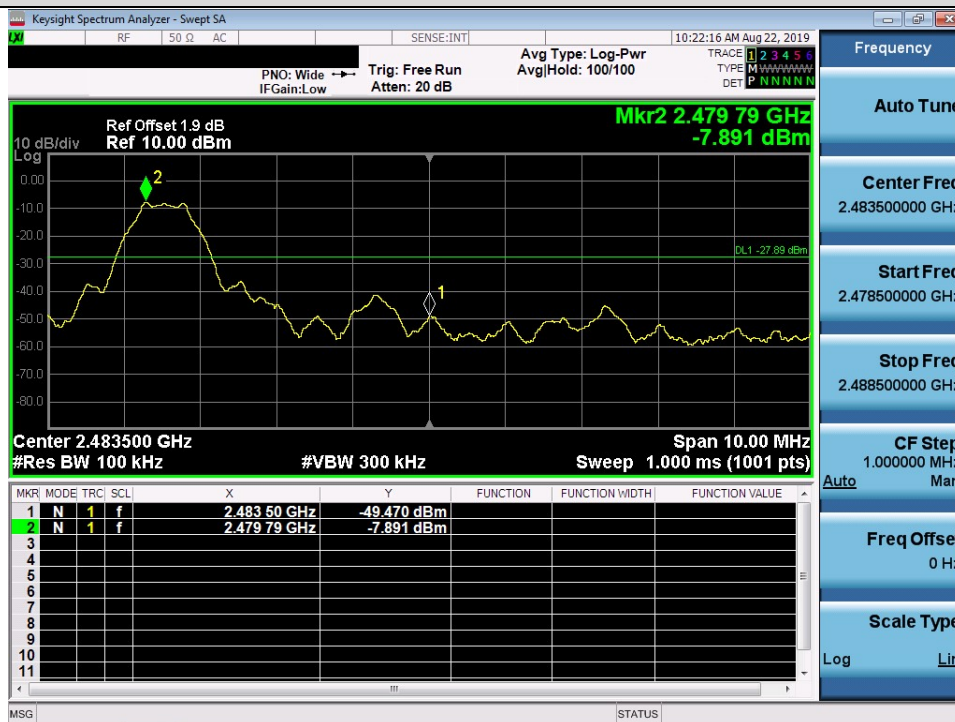

2.6 不必要之發射

2.6.1 限制值

- 操作頻帶範圍外之任意 100 kHz 內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 kHz 內的射頻功率，其衰減值限制如下：
 - 輸出功率以附件二之峰值輸出功率方式測量者，至少須衰減 20dB，可使用射頻傳導或輻射方式測量。
 - 輸出功率以 3.10.1.2(1)(C)之最大傳導輸出功率測量方式者，至少須衰減 30dB。
- 依據NCC低功率射頻電機技術規範第2.8節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。


頻率(f) (MHz)	電場強度 (微伏特/公尺, $\mu\text{V/m}$)	量測距離 (公尺)
0.009 ~ 0.490	2400 / f(kHz)	300
0.490 ~ 1.705	24000 / f(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

備註：


- 電場強度 $(\text{dB } \mu\text{V/m}) = 20 \log \text{電場強度}(\mu\text{V/m})$ 。
- 距離是指測量儀器天線與設備之間的距離。
- 上表規定之電場強度，發射頻率在 9 kHz~90 kHz、110 kHz~490 kHz 及 1000 MHz 以上者，其量測應以平均值檢波器為基準，且應符合 NCC 低功率射頻電機技術規範第 5.15.2 節之規定；其他發射頻率，應以國際無線電干擾特別委員會 (INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE, CISPR) 準峰值檢波器(quasi-peak detector)測量；非以上表所指定之距離測量時，應符合 NCC 低功率射頻電機技術規範第 5.5 節之規定，輻射發射之量測頻率範圍應符合 NCC 低功率射頻電機技術規範第 5.14 節之規定。

2.6.2 測試架構


Below 30 MHz

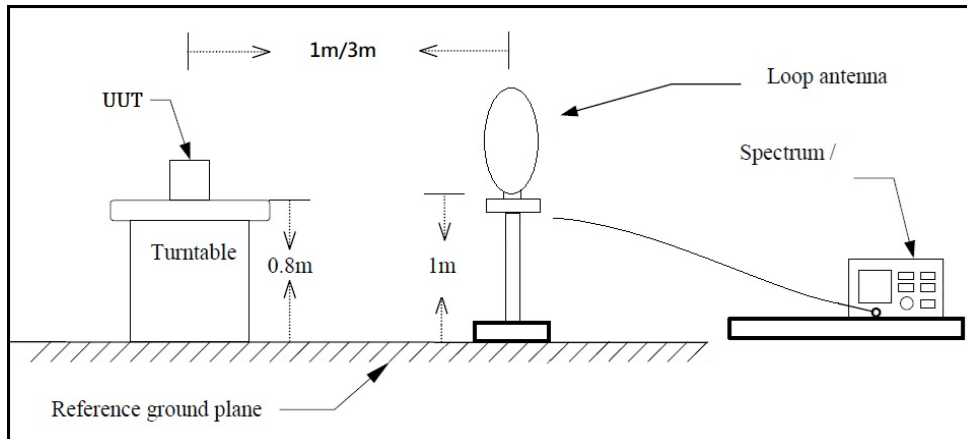

30 MHz ~ 1 GHz

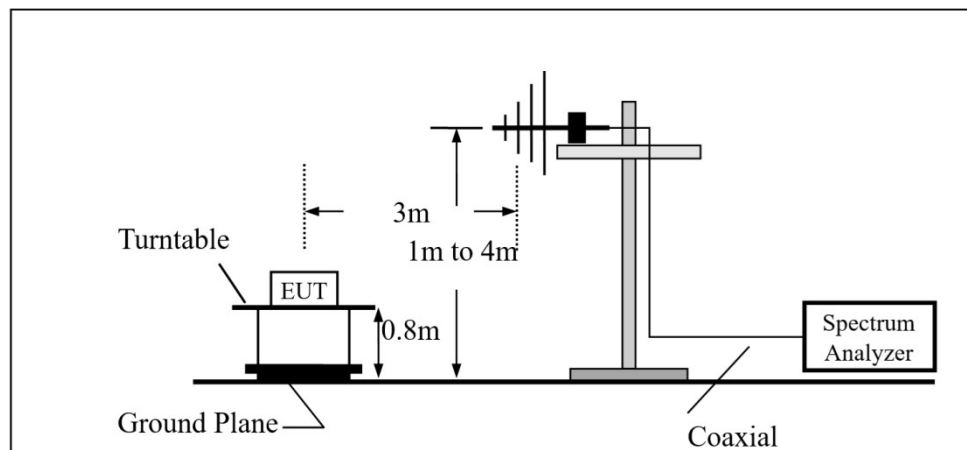

Above 1GHz

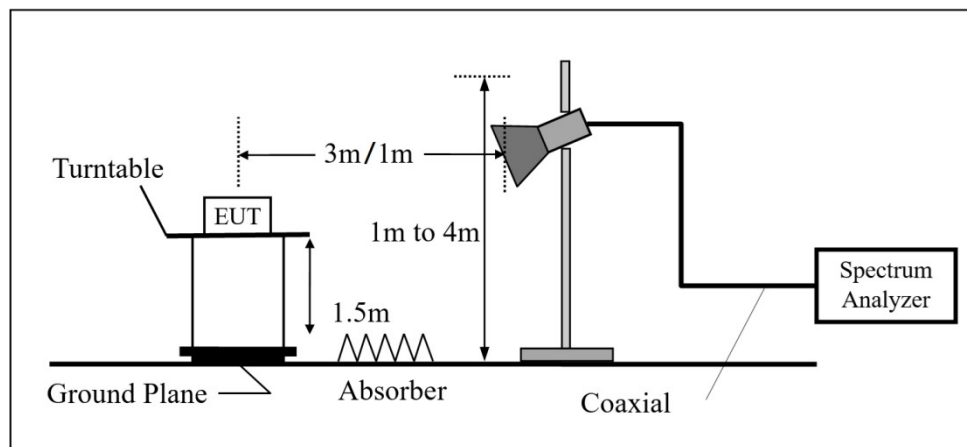

2.6.3 測試流程

低於 30MHz 的輻射發射

- (1) 將 EUT 放置在距離地面 0.8 米的非導體桌面的 3 米室內。將桌子旋轉 360 度以確定最高輻射的位置。
- (2) EUT 設置在離接收天線 3 米遠處，干擾接收天線安裝在可變高度天線塔的頂部。
- (3) 設置天線的平行、垂直方向以進行測量。
- (4) 將測試接收機系統設置為準峰值檢測功能和具有最大保持模式的指定帶寬。

30MHz 以上的輻射發射

- (1) 將 EUT 放置在距離地面 0.8 米（低於 1GHz）/1.5 米（高於 1GHz）的非導體桌面的 3 米室內。將桌子旋轉 360 度以確定最高輻射的位置。
- (2) EUT 設置在離接收天線 3 米處，天線的高度在離地面 1 米到 4 米之間變化，以確定場強的最大值。
- (3) 設置天線的平行、垂直方向以進行測量。
- (4) 當測試頻率低於 1GHz 時，測試接收機系統被設置為準峰值檢測功能和具有最大保持模式的指定帶寬。
- (5) 當測試頻率高於 1 GHz 時，測試接收機系統設置為峰值和平均檢測功能以及具有最大保持模式的指定帶寬。如果峰值讀數值也滿足平均限值，則不需要使用平均值檢測器進行測量。

2.6.4 工作週期


Protocol	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
BLE	2402	1.000	1.000	1.000	0.000	0.010

2.6.5 輻射頻帶邊緣測試

下表為輻射測量，在X、Y、Z三個軸向中預掃描。本報告中記錄了最差情況（X軸向）。

Test Frequency	
RF	BLE
Tx	CH00 (2402MHz)
	CH39 (2480MHz)

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH00(2402MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

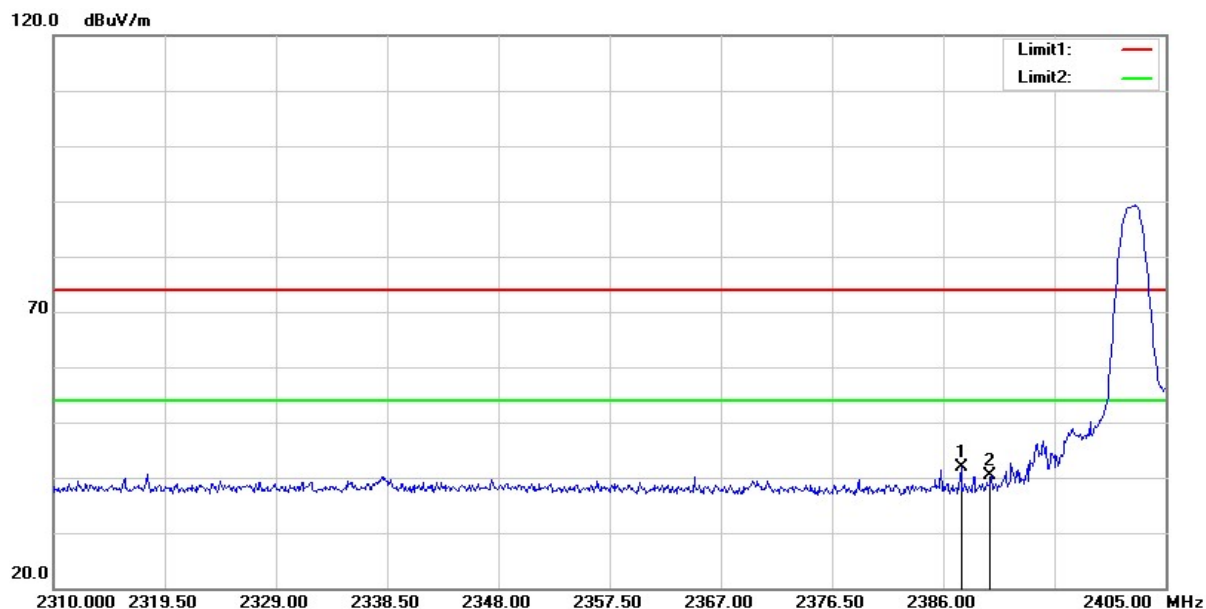


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.520	54.93	-13.16	41.77	74.00	-32.23	peak
2	2390.000	53.44	-13.18	40.26	74.00	-33.74	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH00(2402MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

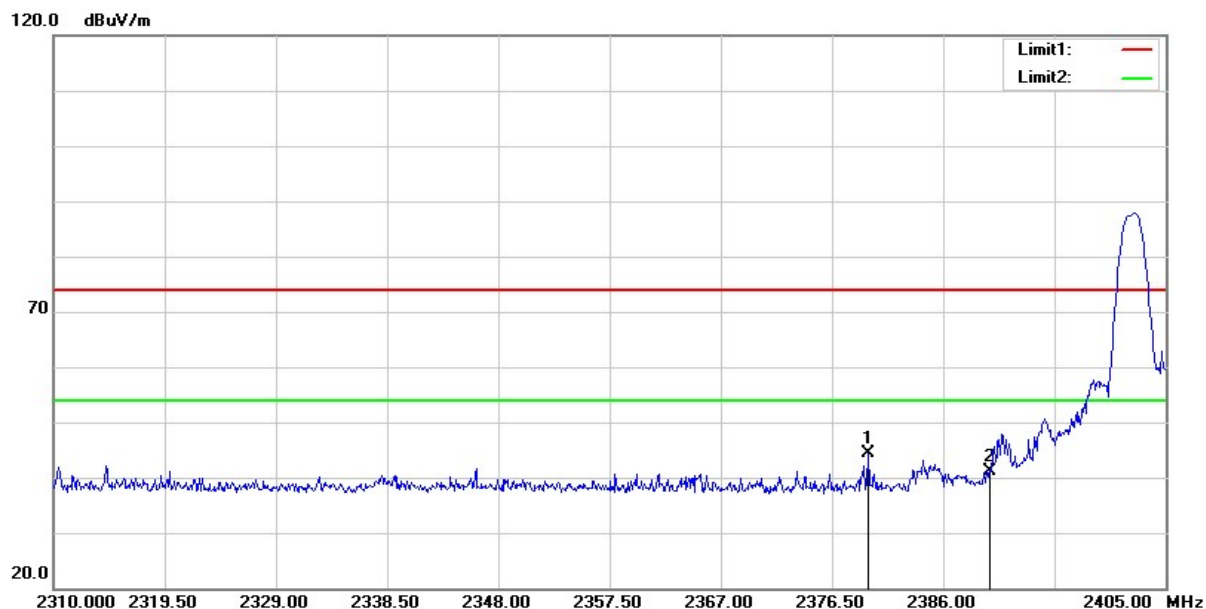


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.635	57.41	-13.10	44.31	74.00	-29.69	peak
2	2390.000	54.35	-13.18	41.17	74.00	-32.83	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH39(2480MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

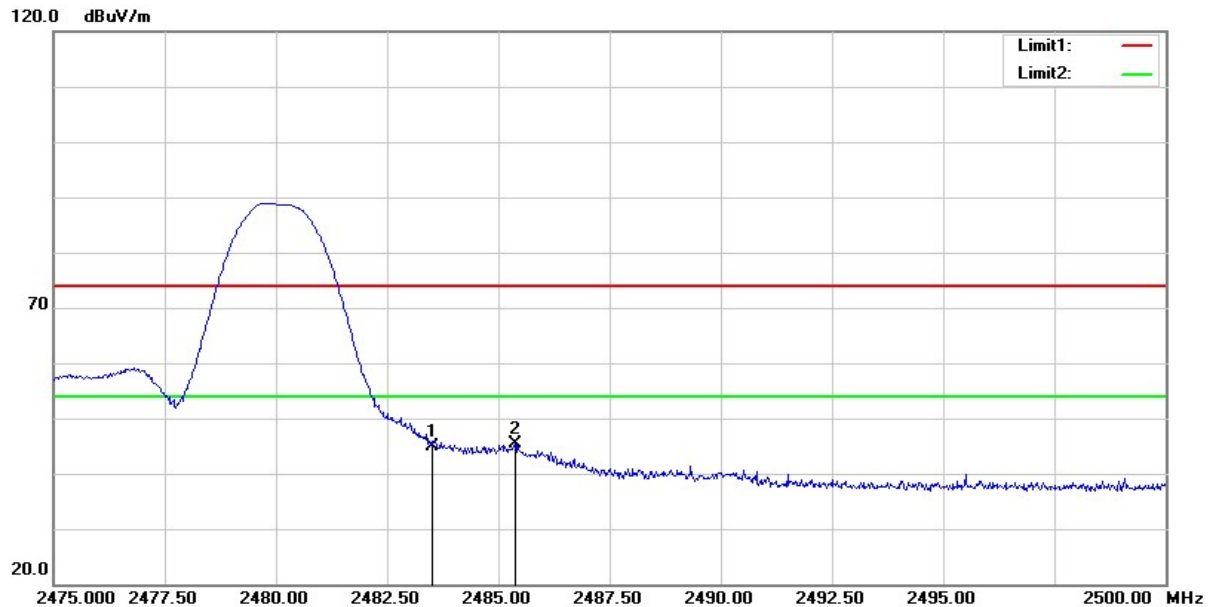


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.31	-13.54	44.77	74.00	-29.23	peak
2	2485.375	58.81	-13.53	45.28	74.00	-28.72	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH39(2480MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

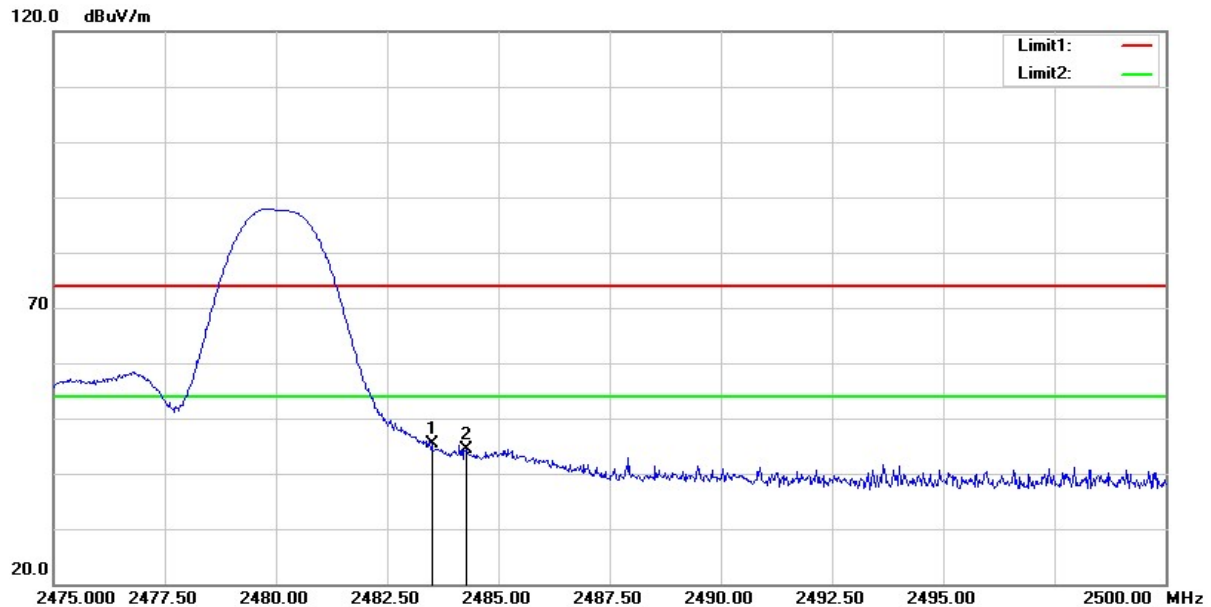

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.90	-13.54	45.36	74.00	-28.64	peak
2	2484.275	57.96	-13.53	44.43	74.00	-29.57	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.6.6 輻射雜散發射測試

- (1) 輻射量測頻率 9kHz ~ 30MHz，此頻率範圍之干擾值低於限制值 20dB 以下，被考量為背景雜訊值並不予紀錄。
- (2) 下表為輻射測量頻率 30MHz ~ 26.5GHz，在 X、Y、Z 三個軸向中預掃描。本報告中記錄了最壞情況（X 軸向）。

Test Frequency	
RF	BLE
Tx	CH00 (2402MHz)
	CH19 (2440MHz)
	CH39 (2480MHz)
Rx	CH19 (2440MHz)

Above 1GHz Data

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH00(2402MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

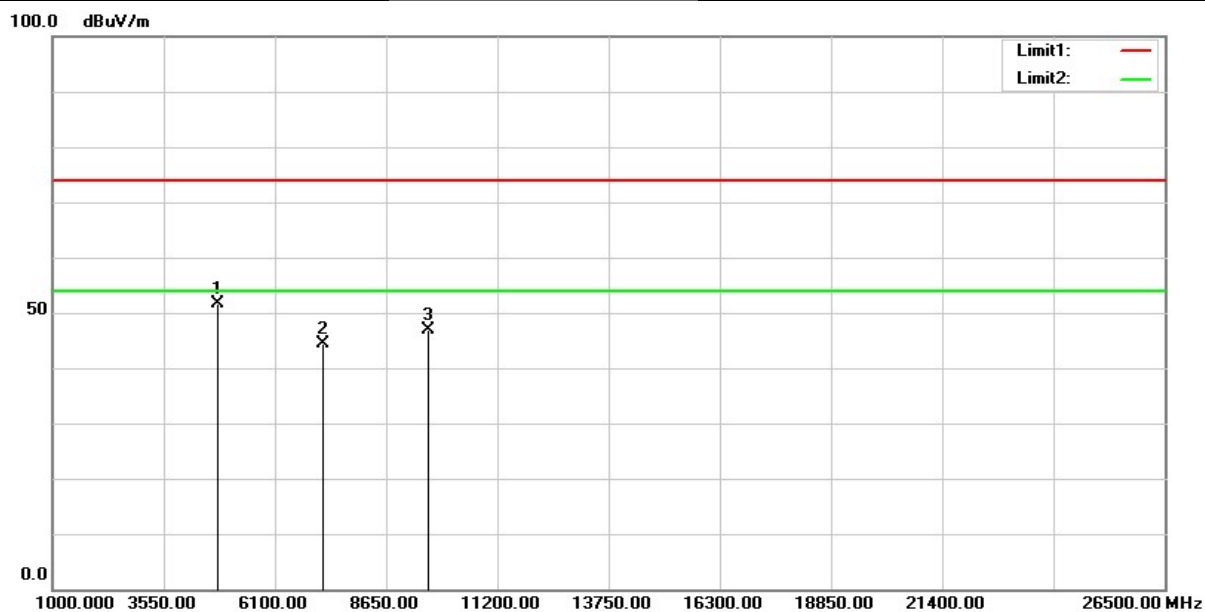

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	60.29	-8.68	51.61	74.00	-22.39	peak
2	7206.000	46.89	-2.54	44.35	74.00	-29.65	peak
3	9608.000	45.83	1.05	46.88	74.00	-27.12	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH00(2402MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	58.15	-8.68	49.47	74.00	-24.53	peak
2	7206.000	47.34	-2.54	44.80	74.00	-29.20	peak
3	9608.000	46.02	1.05	47.07	74.00	-26.93	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH19(2440MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	61.40	-8.82	52.58	74.00	-21.42	peak
2	7320.000	47.00	-2.72	44.28	74.00	-29.72	peak
3	9760.000	46.11	2.01	48.12	74.00	-25.88	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH19(2440MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	58.30	-8.82	49.48	74.00	-24.52	peak
2	7320.000	46.83	-2.72	44.11	74.00	-29.89	peak
3	9760.000	46.14	2.01	48.15	74.00	-25.85	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH39(2480MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	60.54	-8.40	52.14	74.00	-21.86	peak
2	7440.000	47.91	-2.67	45.24	74.00	-28.76	peak
3	9920.000	45.16	2.48	47.64	74.00	-26.36	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH39(2480MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

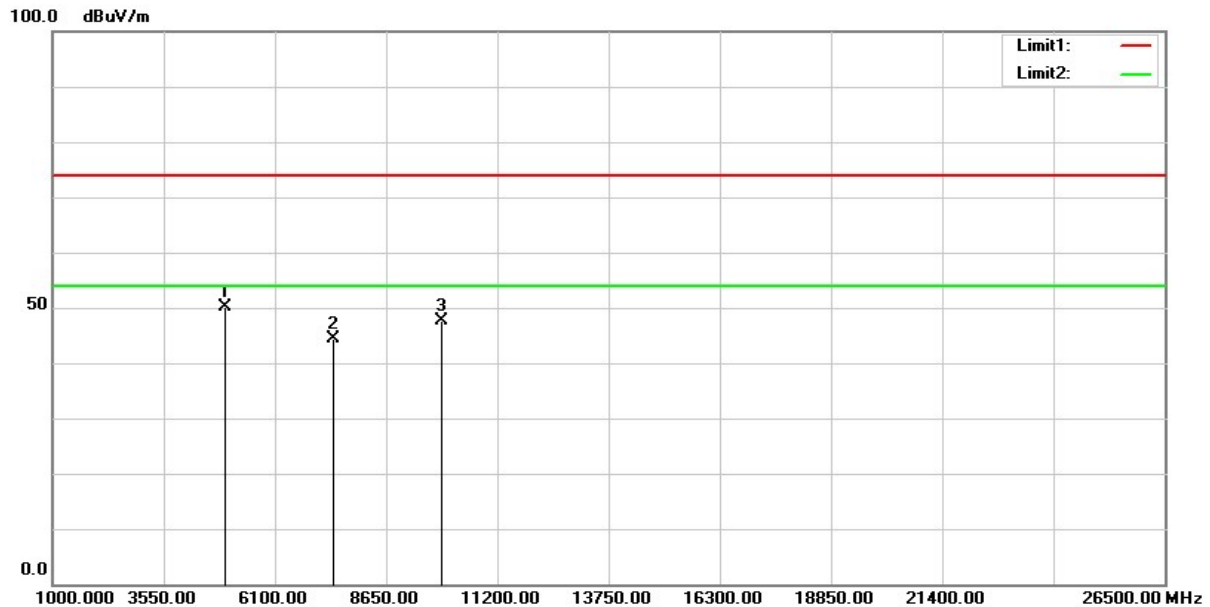

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	58.47	-8.40	50.07	74.00	-23.93	peak
2	7440.000	47.11	-2.67	44.44	74.00	-29.56	peak
3	9920.000	45.07	2.48	47.55	74.00	-26.45	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 2 ; Receiver BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH19(2440MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	48.76	-8.82	39.94	74.00	-34.06	peak
2	7320.000	47.23	-2.72	44.51	74.00	-29.49	peak
3	9760.000	45.51	2.01	47.52	74.00	-26.48	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 2 ; Receiver BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH19(2440MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	48.01	-9.92	38.09	74.00	-35.91	peak
2	7320.000	46.23	-2.72	43.51	74.00	-30.49	peak
3	9760.000	45.07	2.01	47.08	74.00	-26.92	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Below 1GHz Data

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH19(2440MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

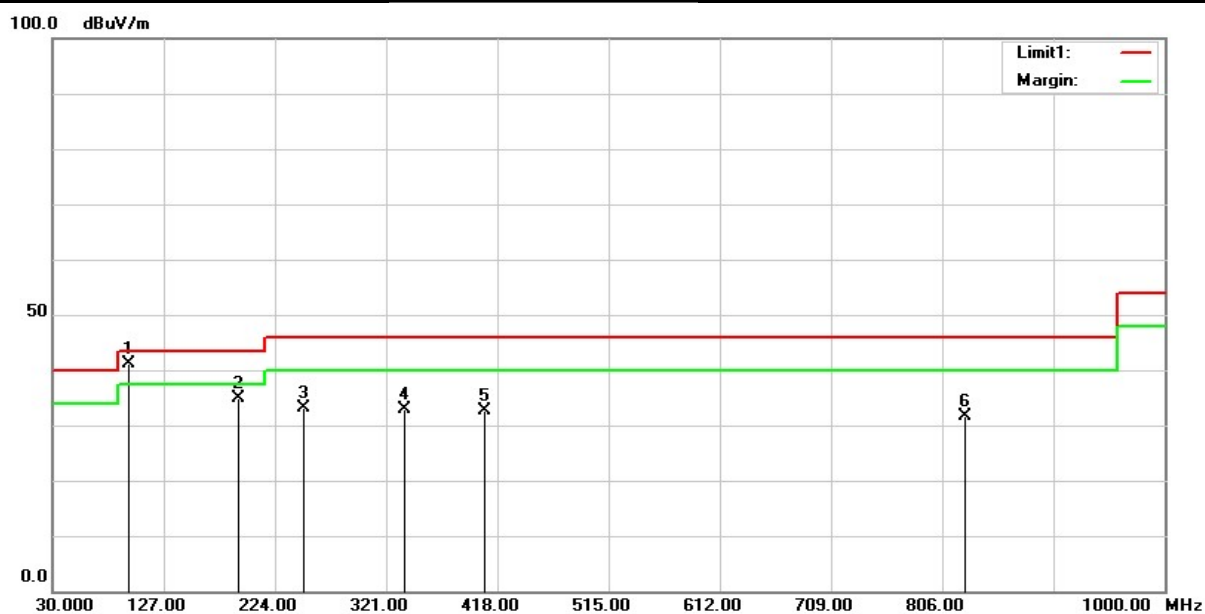

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	95.9600	56.77	-15.54	41.23	43.50	-2.27	QP
2	191.9900	47.13	-12.36	34.77	43.50	-8.73	QP
3	249.2200	43.93	-10.79	33.14	46.00	-12.86	QP
4	337.4900	41.04	-8.04	33.00	46.00	-13.00	QP
5	407.3300	38.97	-6.35	32.62	46.00	-13.38	QP
6	826.3700	30.46	1.29	31.75	46.00	-14.25	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1 ; Transmit BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH19(2440MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	44.08	-10.33	33.75	40.00	-6.25	QP
2	63.9500	45.23	-10.82	34.41	40.00	-5.59	QP
3	95.9600	50.12	-15.54	34.58	43.50	-8.92	QP
4	408.3000	38.63	-6.33	32.30	46.00	-13.70	QP
5	531.4900	37.97	-3.70	34.27	46.00	-11.73	QP
6	743.9200	31.36	0.24	31.60	46.00	-14.40	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 2 ; Receiver BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH19(2440MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	95.9600	57.08	-15.54	41.54	43.50	-1.96	QP
2	191.9900	46.71	-12.36	34.35	43.50	-9.15	QP
3	256.0100	43.94	-10.62	33.32	46.00	-12.68	QP
4	384.0500	39.28	-6.89	32.39	46.00	-13.61	QP
5	600.3600	32.56	-2.02	30.54	46.00	-15.46	QP
6	790.4800	30.26	0.81	31.07	46.00	-14.93	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 2 ; Receiver BLE	Test Date :	108 年 08 月 24 日
Test Channel :	CH19(2440MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

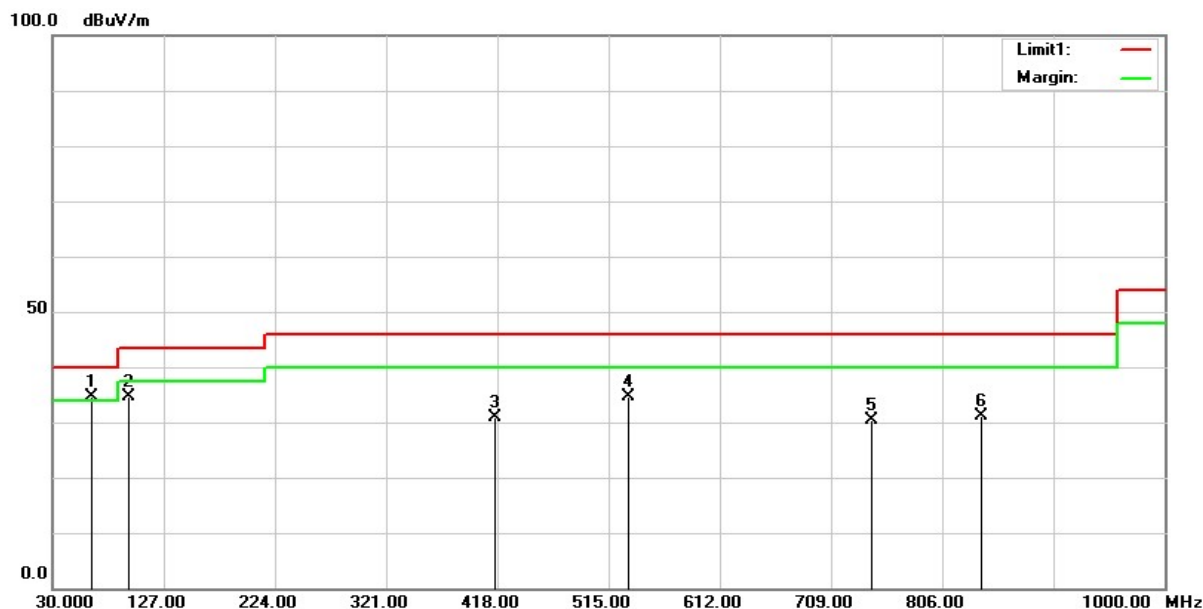

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	63.9500	45.47	-10.82	34.65	40.00	-5.35	QP
2	95.9600	50.05	-15.54	34.51	43.50	-8.99	QP
3	416.0600	37.01	-6.16	30.85	46.00	-15.15	QP
4	532.4600	38.20	-3.66	34.54	46.00	-11.46	QP
5	743.9200	30.05	0.24	30.29	46.00	-15.71	QP
6	839.9500	29.63	1.43	31.06	46.00	-14.94	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.7 電源線傳導干擾

2.7.1 限制值

Frequency (MHz)	NCC LP0002 2.3 Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*隨頻率之對數遞減

2.7.2 測試架構

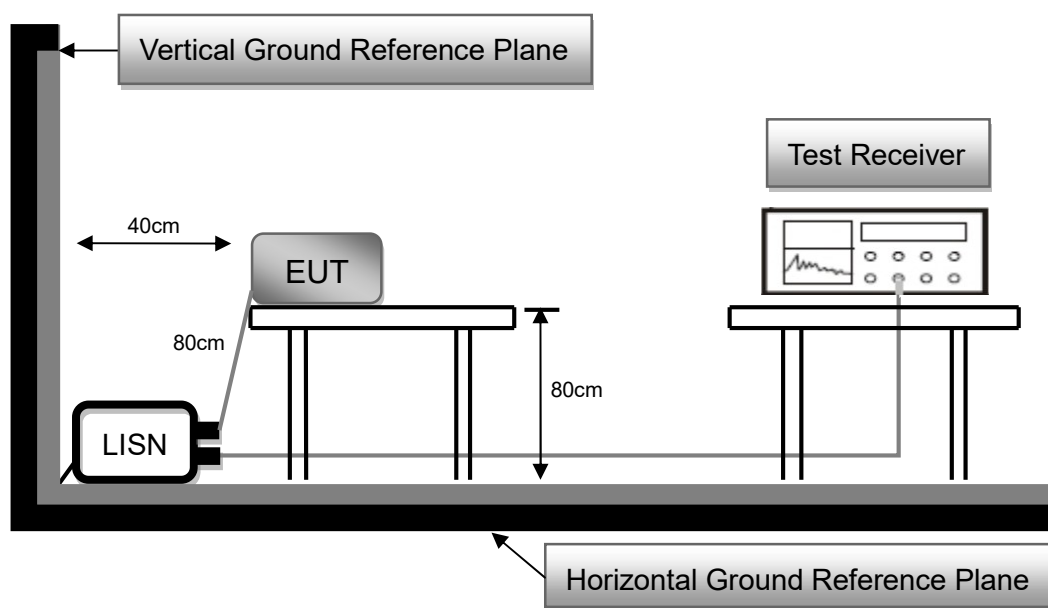

2.7.3 測試流程

1. 待測物從水平地平面放置 0.8 米高的木桌，待測物通過線路阻抗穩定網絡（LISN）連接到電源。 LISN 距離最近的待測物底盤至少 80 厘米。
2. 線路阻抗穩定網絡（LISN）為測量儀器提供 50 歐姆/ 50uH 的耦合阻抗。其他設備均由額外的 LISN 提供動力。
3. 懸掛在離地平面 40 厘米以內的相互關聯的電纜應在中心前後折疊形成一束。所有未連接到外圍設備的 I/O 電纜應在中心捆綁。如果需要，可以使用正確的終端阻抗終止電纜的末端。總長度不得超過 1 米。
4. EMI 測試接收器連接到 LISN 為待測物供電。實際測試配置請參考待測物測試照片。
5. 接收器在 150kHz 至 30MHz 範圍內掃描每種測試模式的發射。掃描兩條電源線，Line 和 Neutral，記錄至少六個最高排放。
6. 記錄上述最高排放水平的待測物和電纜配置。記錄了最差情況的測試數據。

2.7.4 測試結果

Test Voltage :	110Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Mode 3 ; Normal Link	6dB Bandwidth :	9 kHz
Test Date :	108年08月21日	Phase :	L
Temperature :	25°C	Humidity :	65 %




No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	46.09	9.81	55.9	65.79	-9.89	QP
2	0.1539	26.89	9.81	36.7	55.79	-19.09	AVG
3	0.165	41.51	9.81	51.32	65.21	-13.89	QP
4	0.165	17.66	9.81	27.47	55.21	-27.74	AVG
5	0.1812	42.39	9.81	52.2	64.43	-12.23	QP
6	0.1812	24.98	9.81	34.79	54.43	-19.64	AVG
7	0.2025	38.24	9.81	48.05	63.51	-15.46	QP
8	0.2025	19.34	9.81	29.15	53.51	-24.36	AVG
9	0.2281	35.39	9.81	45.2	62.52	-17.32	QP
10	0.2281	19.17	9.81	28.98	52.52	-23.54	AVG
11	0.2719	30.98	9.81	40.79	61.06	-20.27	QP
12	0.2719	18.14	9.81	27.95	51.06	-23.11	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value - Limit Value

Test Voltage :	110Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Mode 3 ; Normal Link	6dB Bandwidth :	9 kHz
Test Date :	108年08月21日	Phase :	N
Temperature :	25°C	Humidity :	65 %

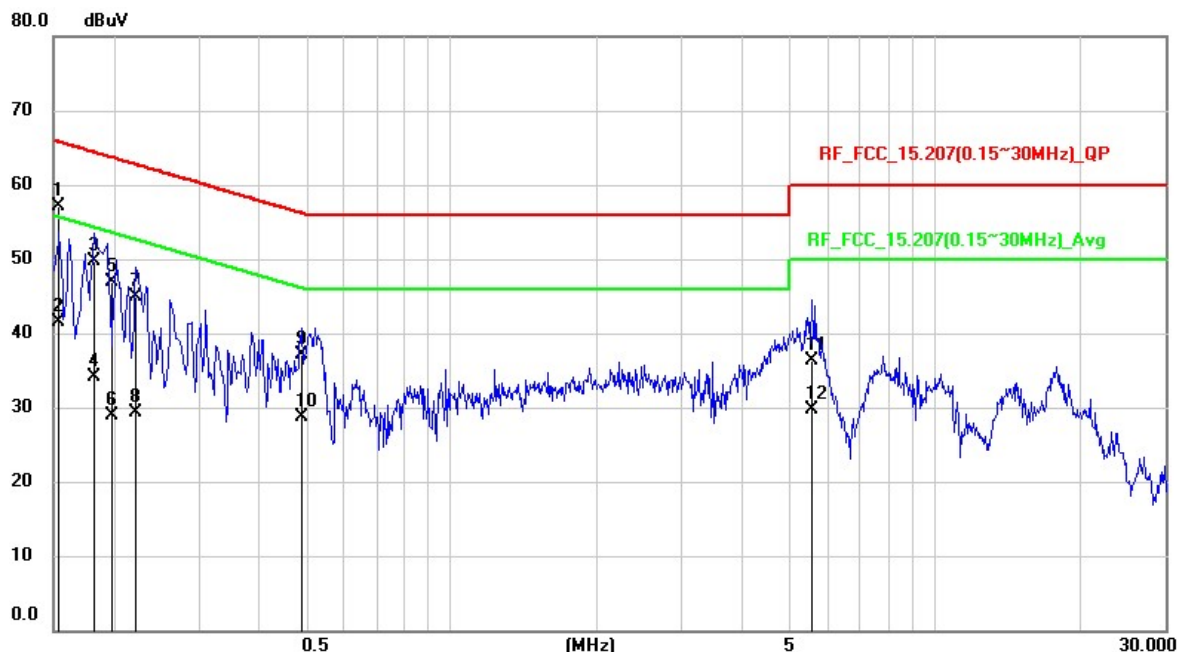

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	47.31	9.79	57.1	65.79	-8.69	QP
2	0.1539	31.71	9.79	41.5	55.79	-14.29	AVG
3	0.183	39.96	9.79	49.75	64.35	-14.6	QP
4	0.183	24.37	9.79	34.16	54.35	-20.19	AVG
5	0.1983	37.18	9.79	46.97	63.68	-16.71	QP
6	0.1983	19.05	9.79	28.84	53.68	-24.84	AVG
7	0.2219	35.1	9.79	44.89	62.75	-17.86	QP
8	0.2219	19.54	9.79	29.33	52.75	-23.42	AVG
9	0.489	27.22	9.79	37.01	56.18	-19.17	QP
10	0.489	18.98	9.79	28.77	46.18	-17.41	AVG
11	5.5769	26.42	9.96	36.38	60	-23.62	QP
12	5.5769	19.8	9.96	29.76	50	-20.24	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

-- END --