






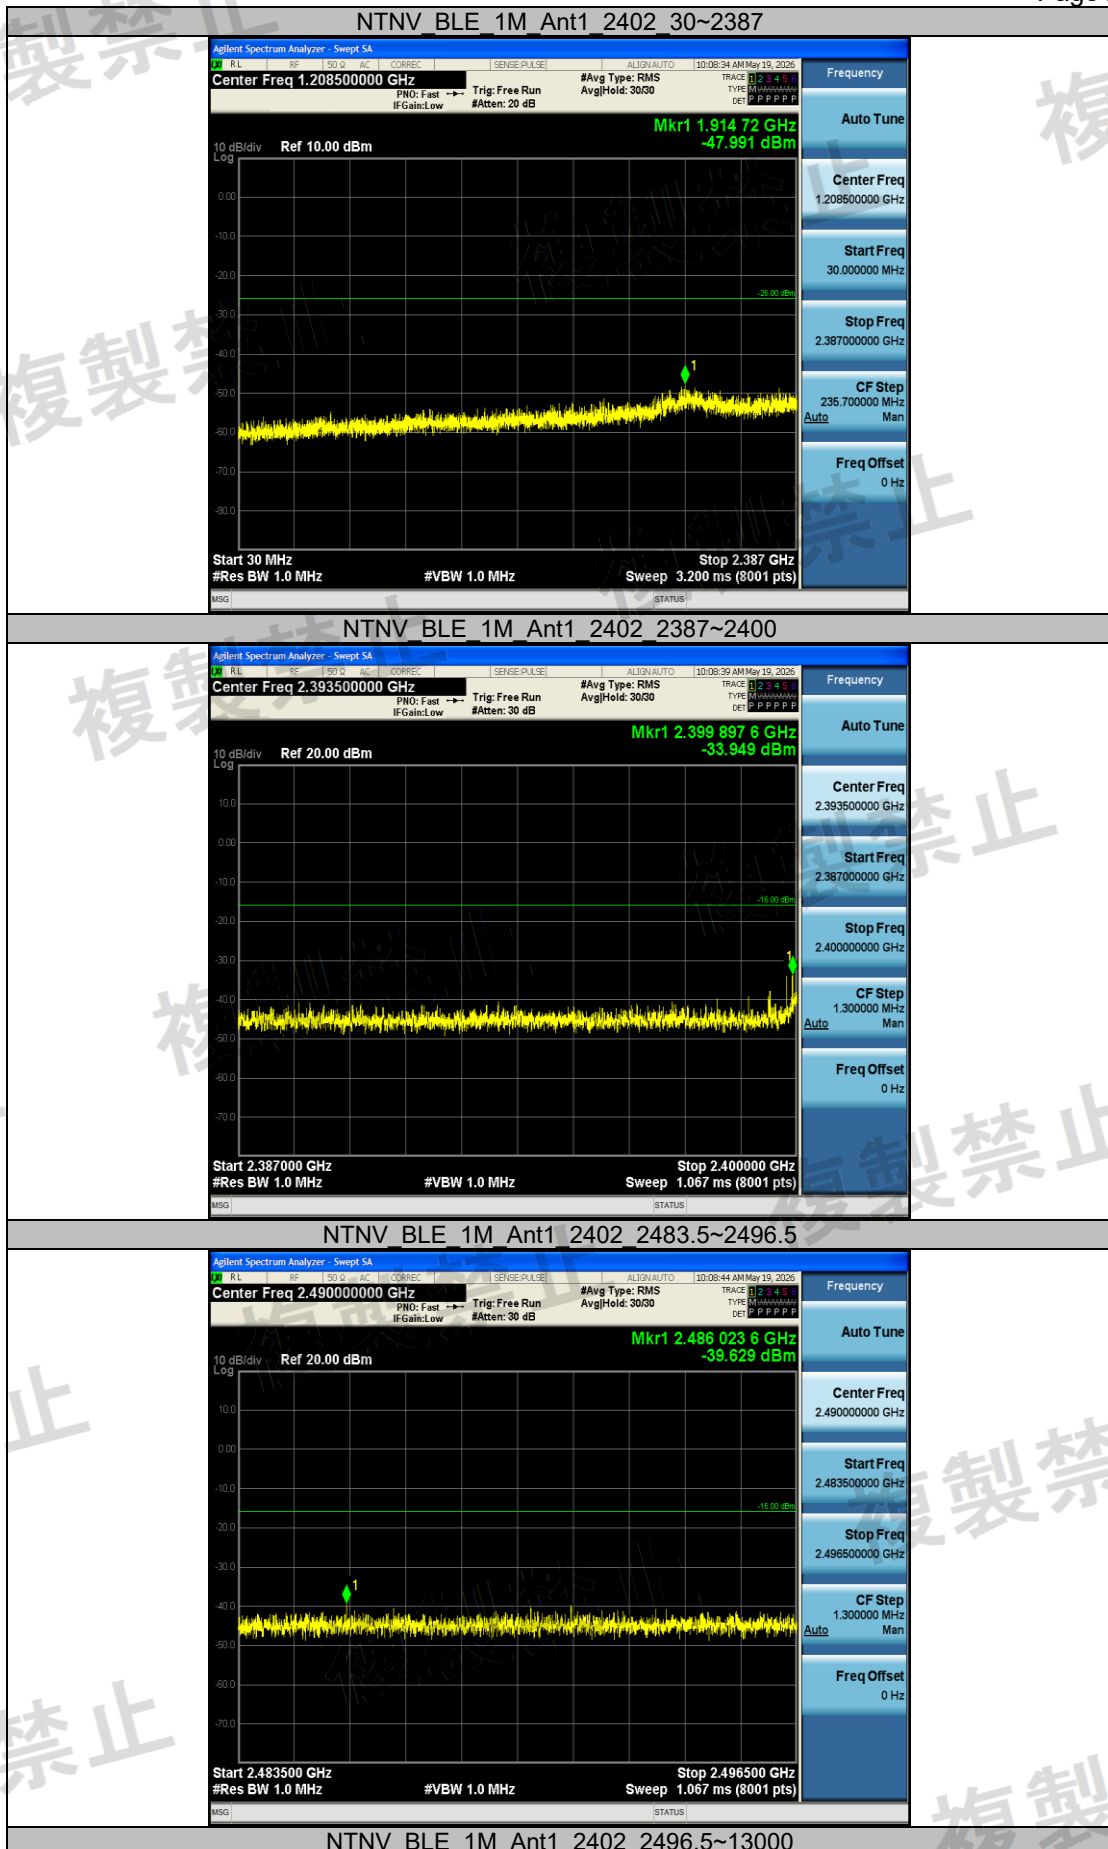


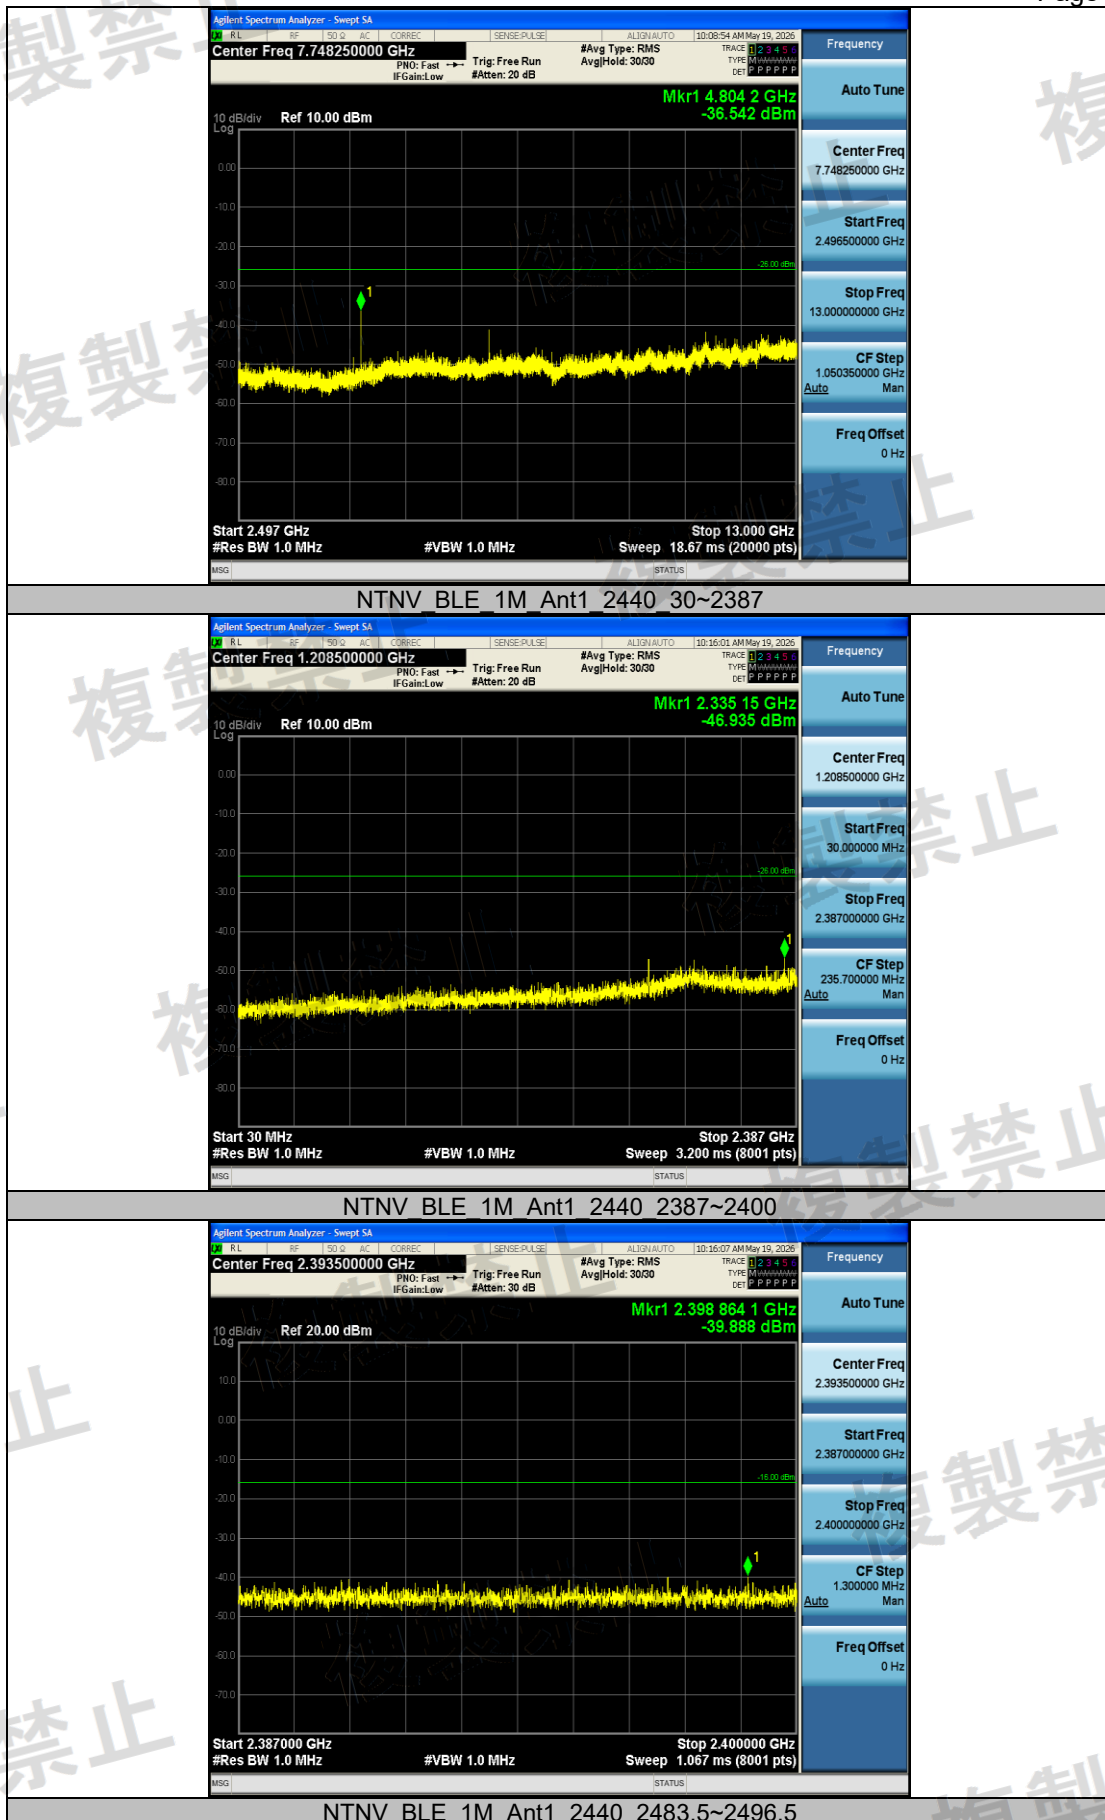


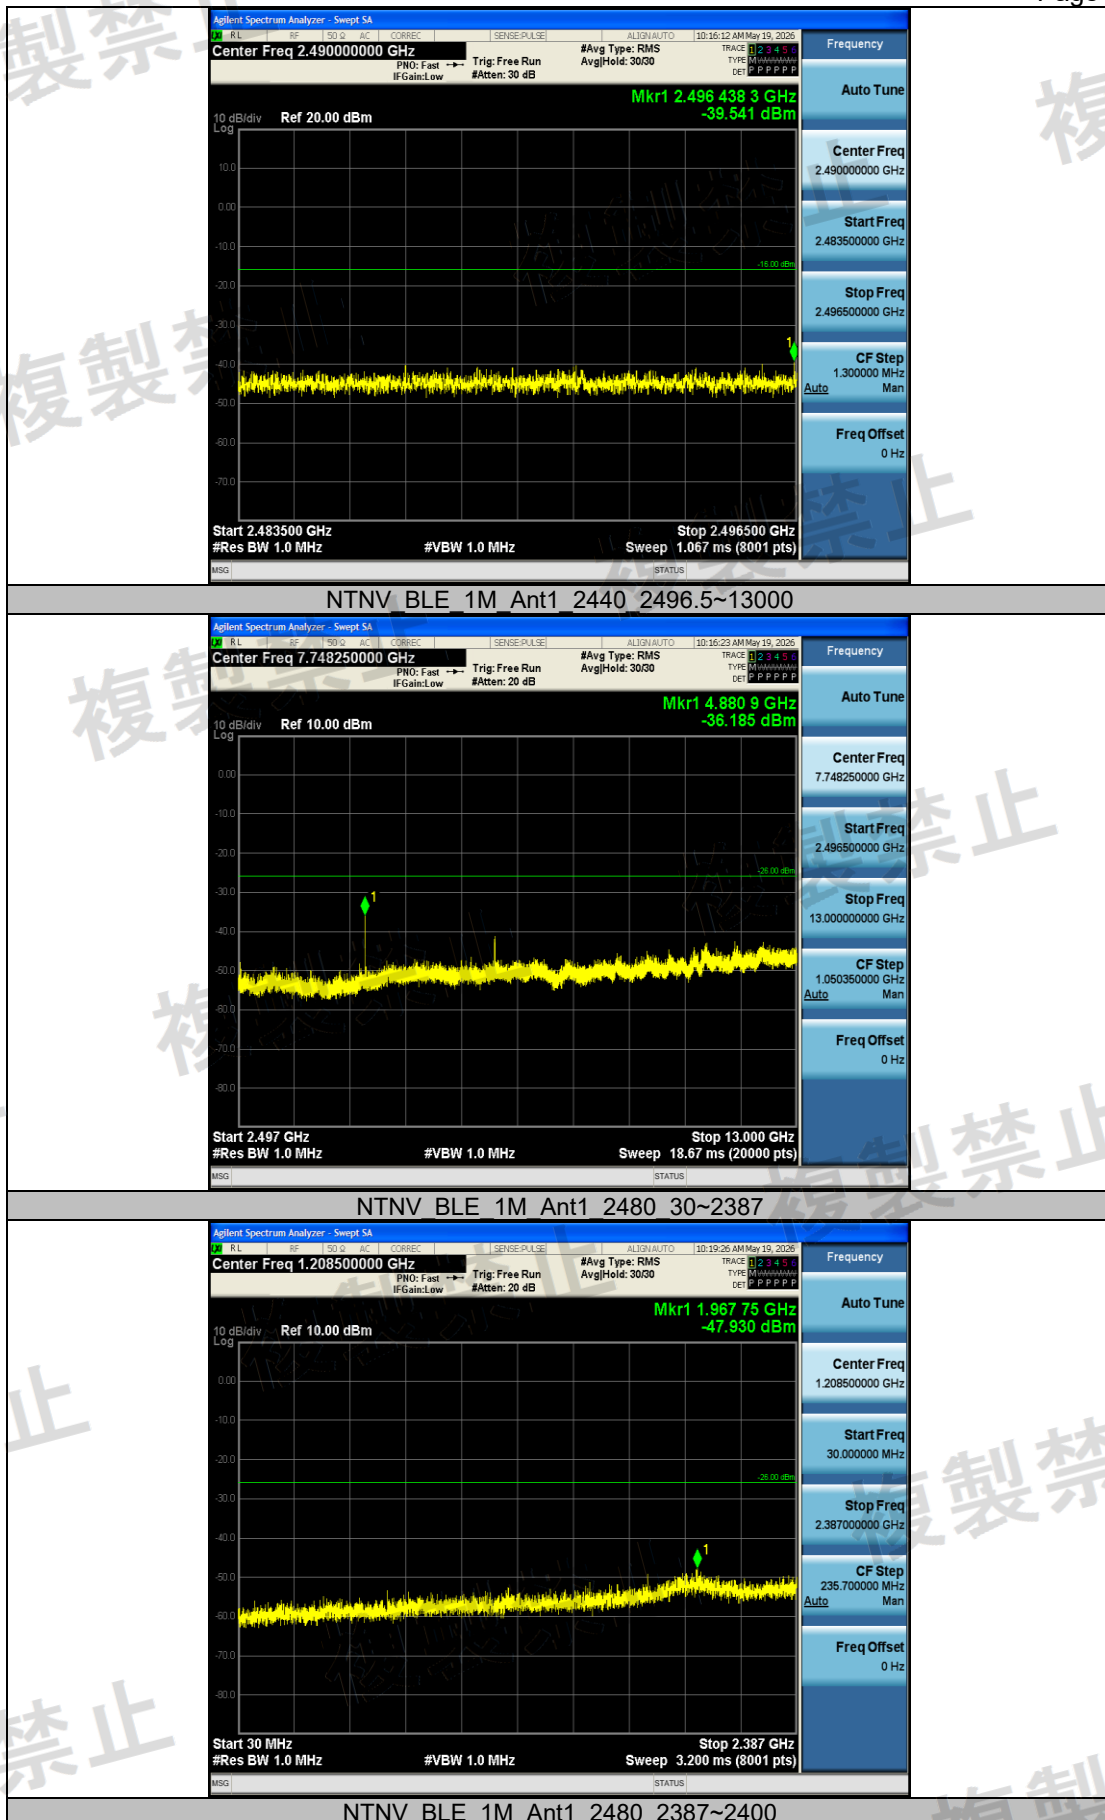


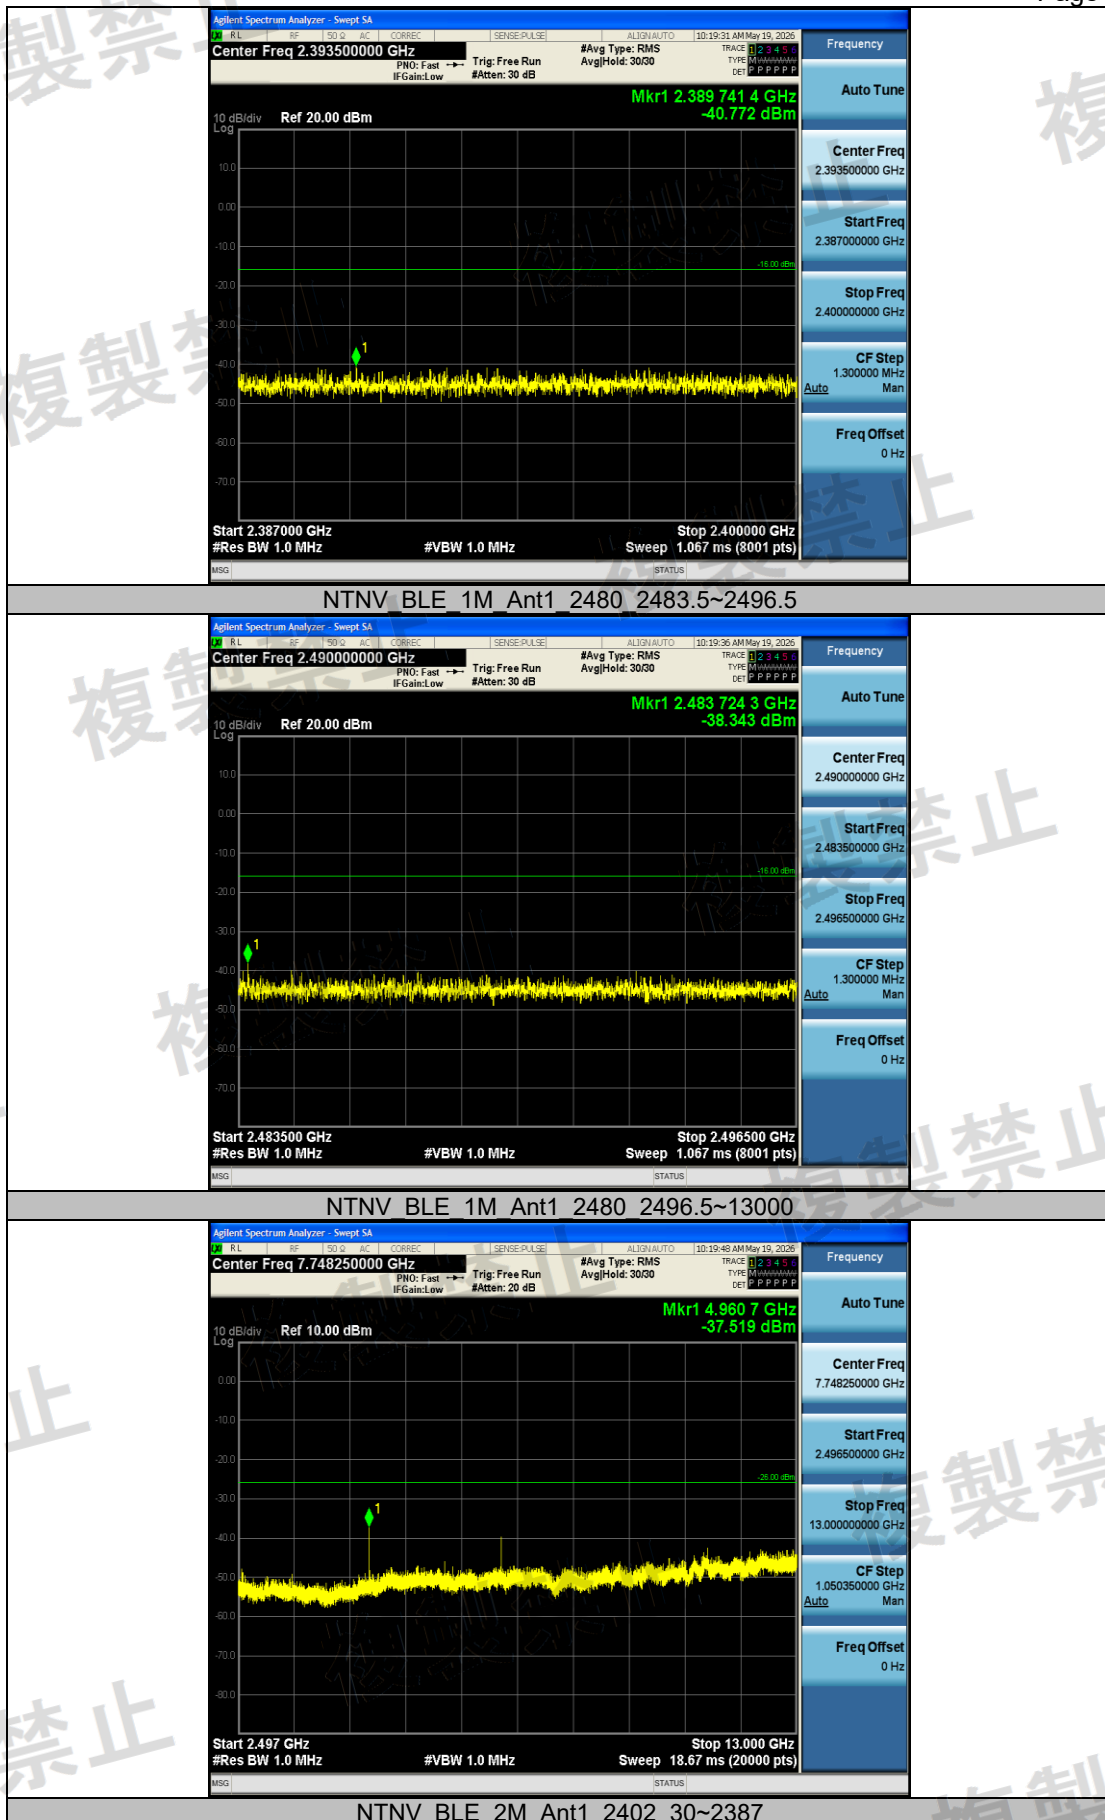


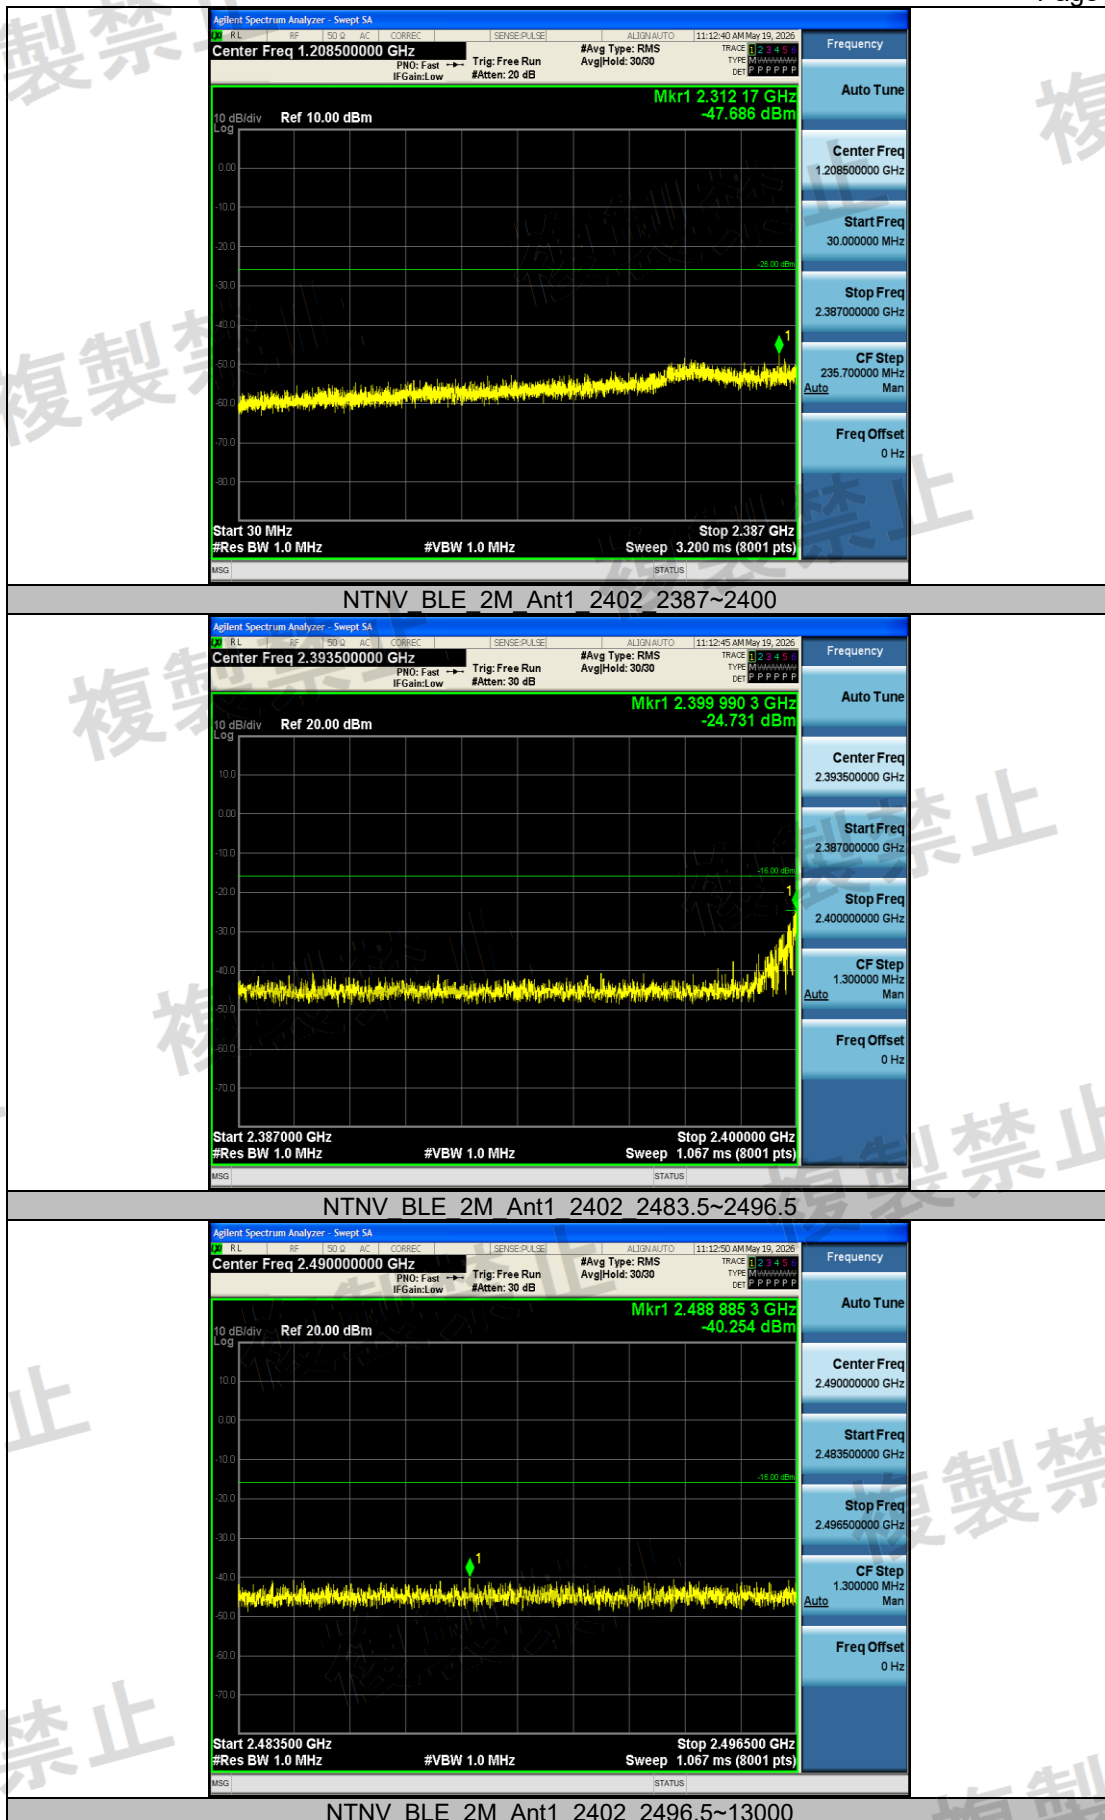


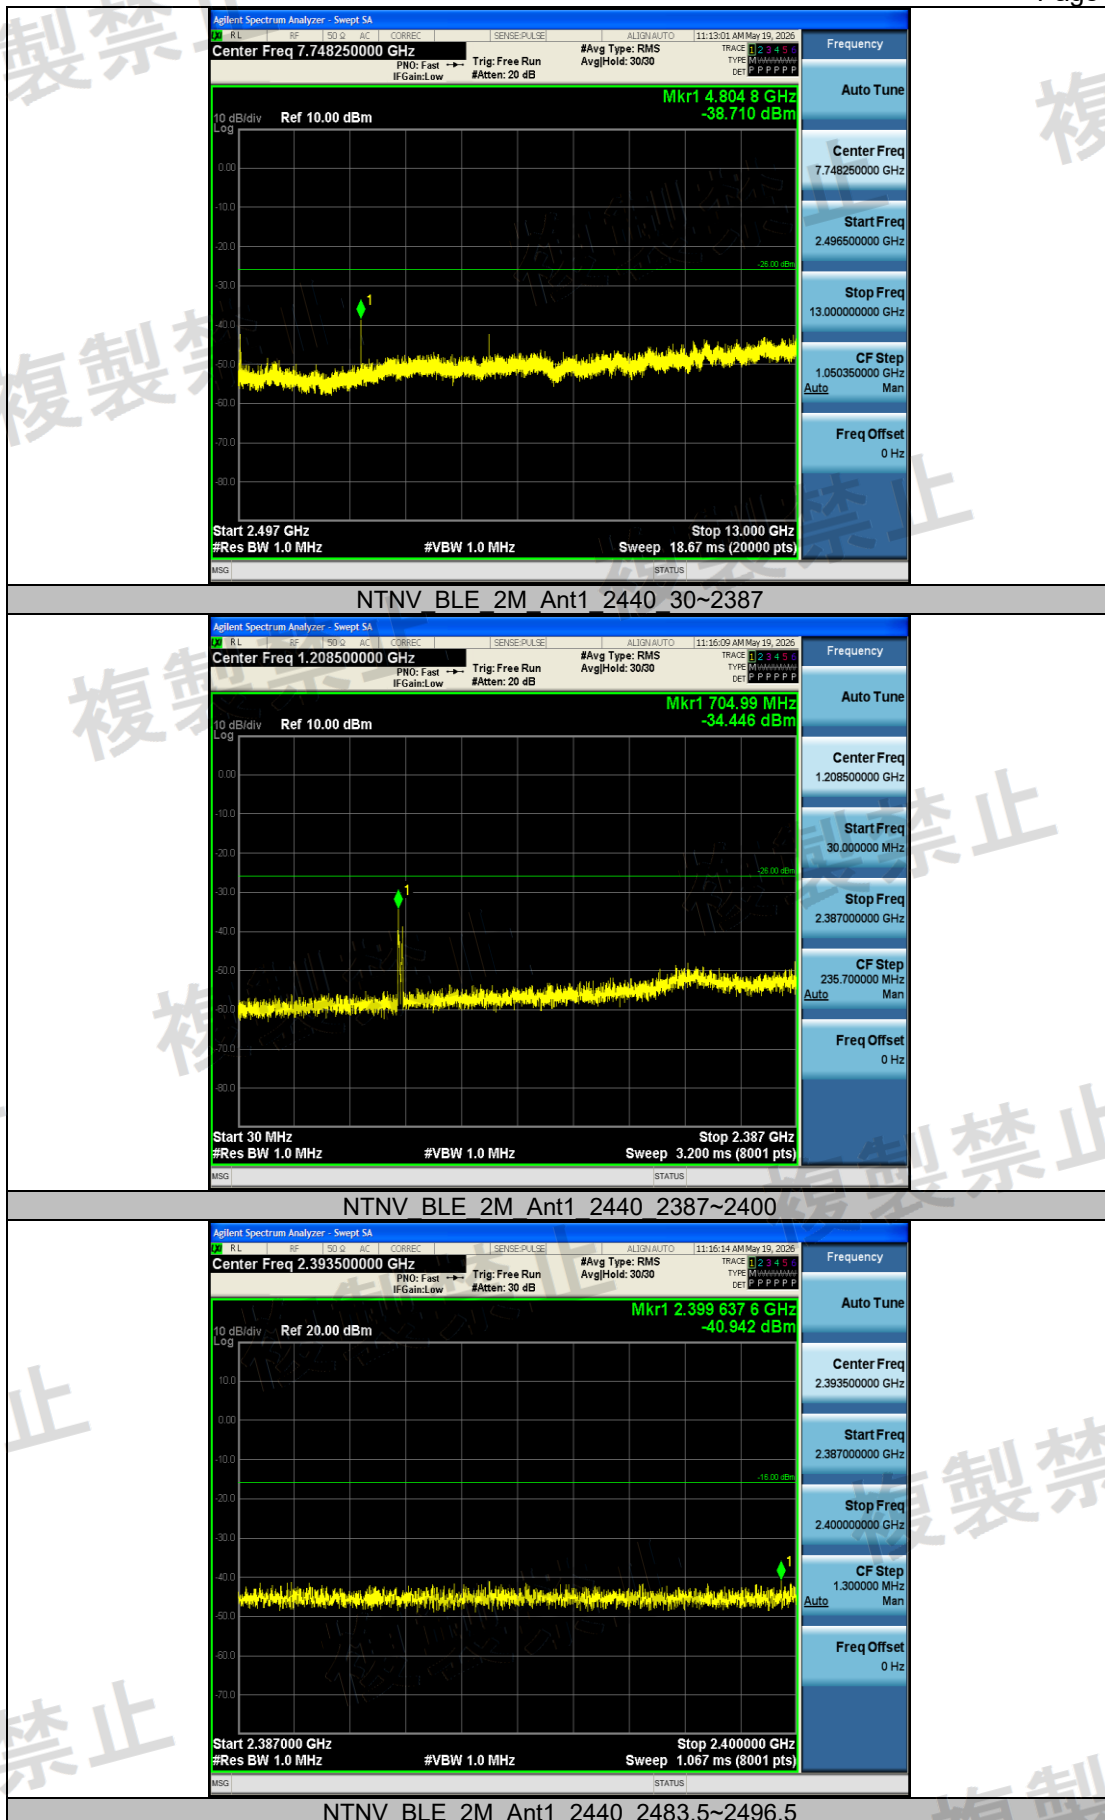


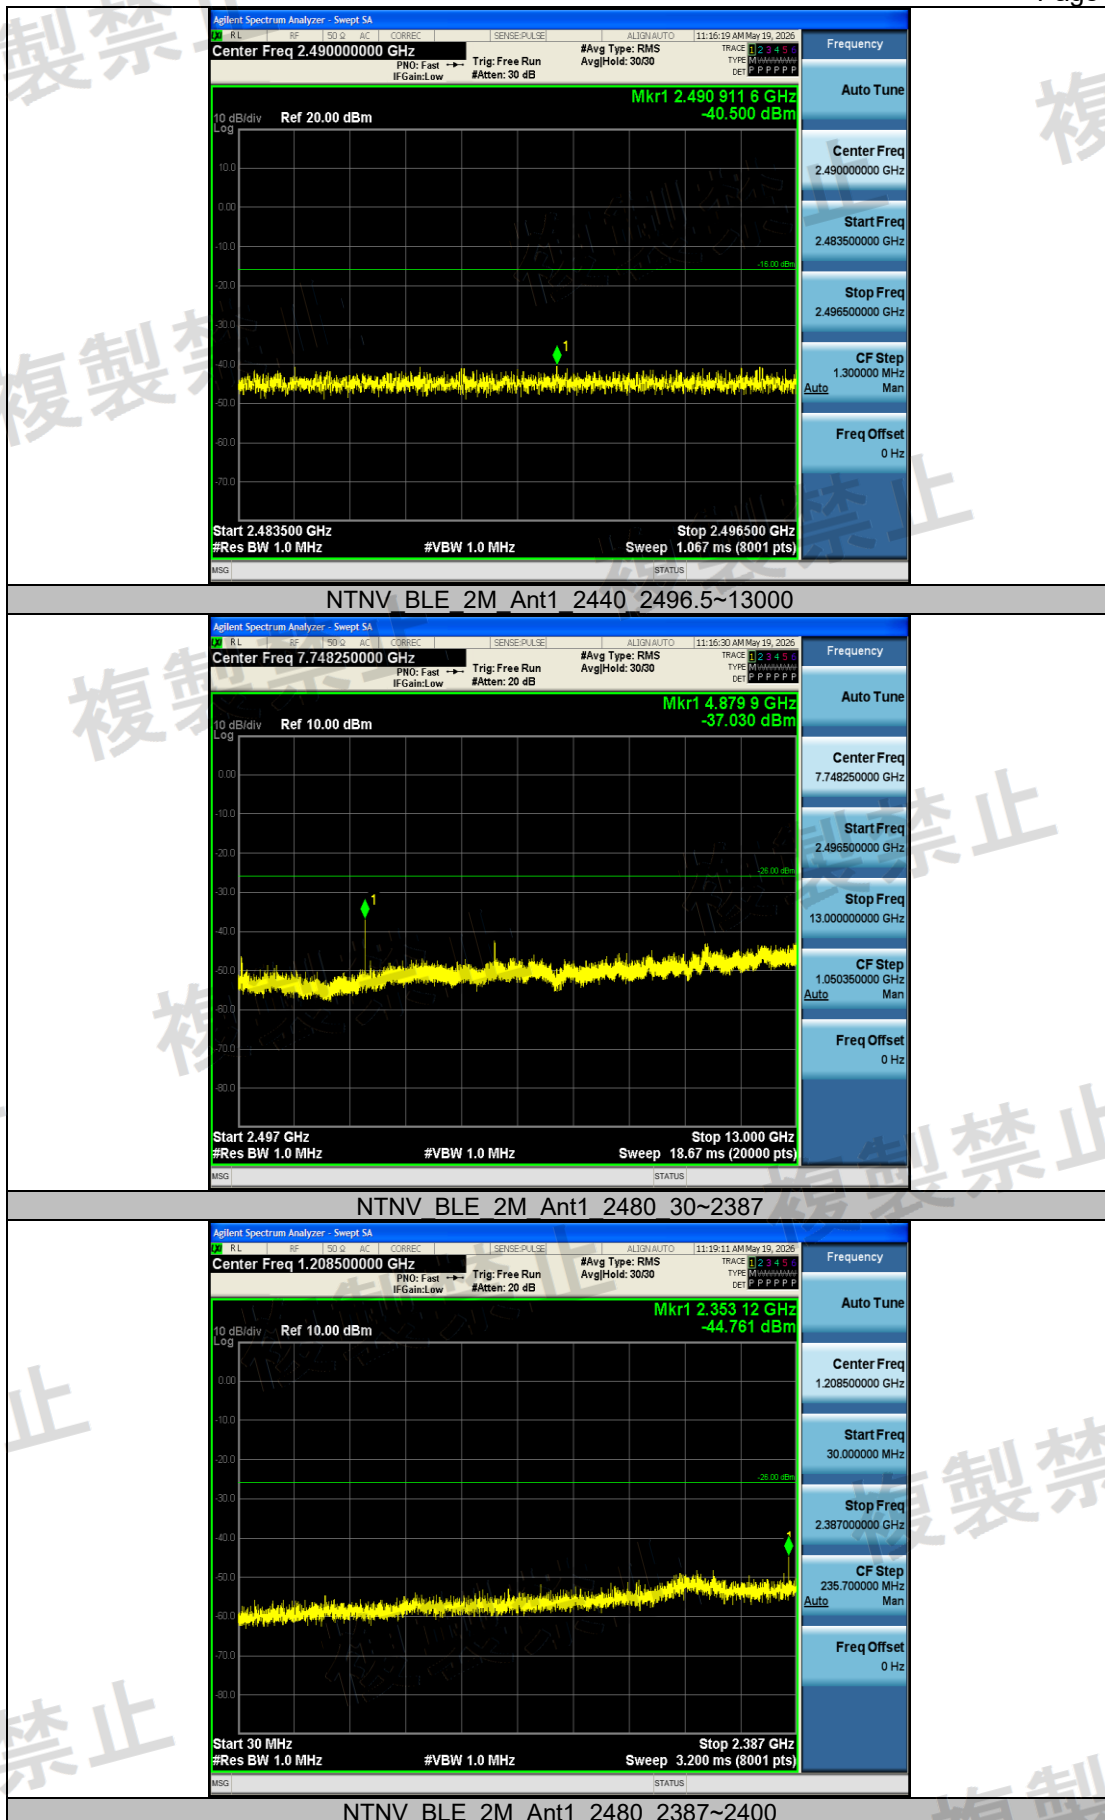


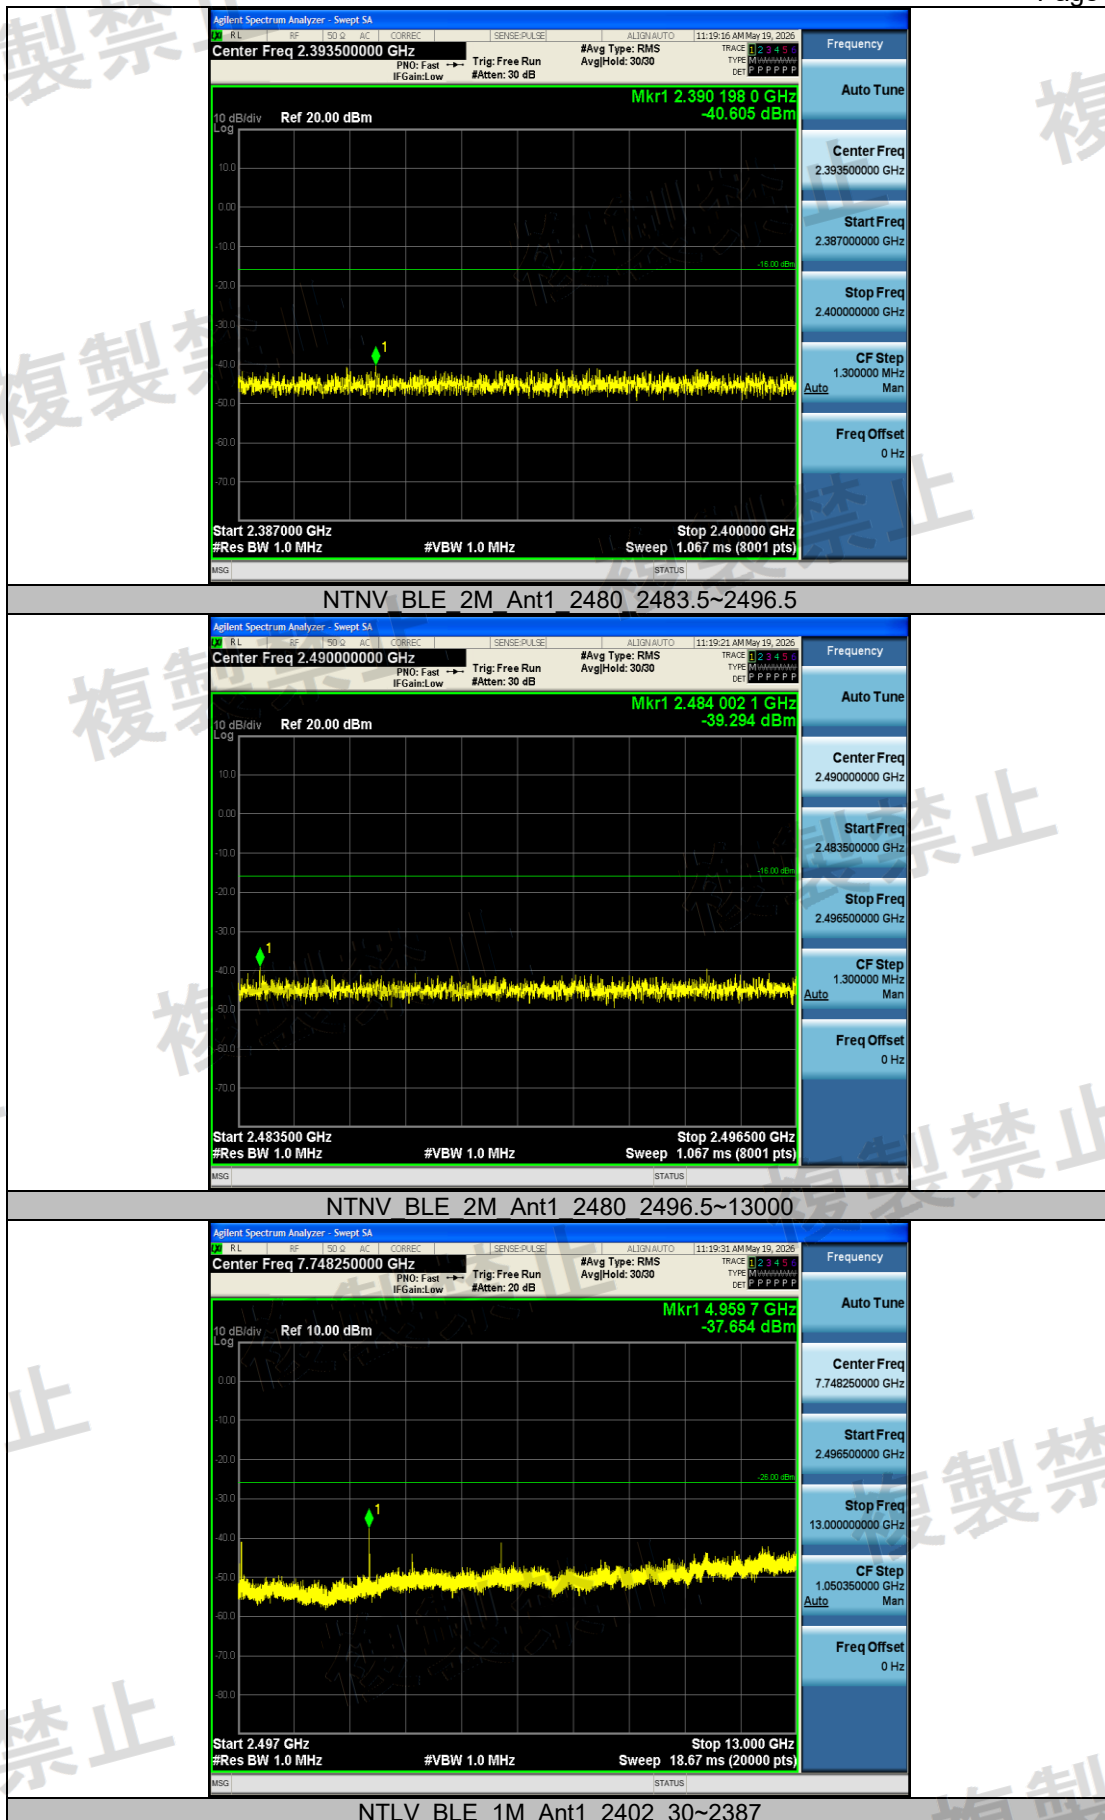


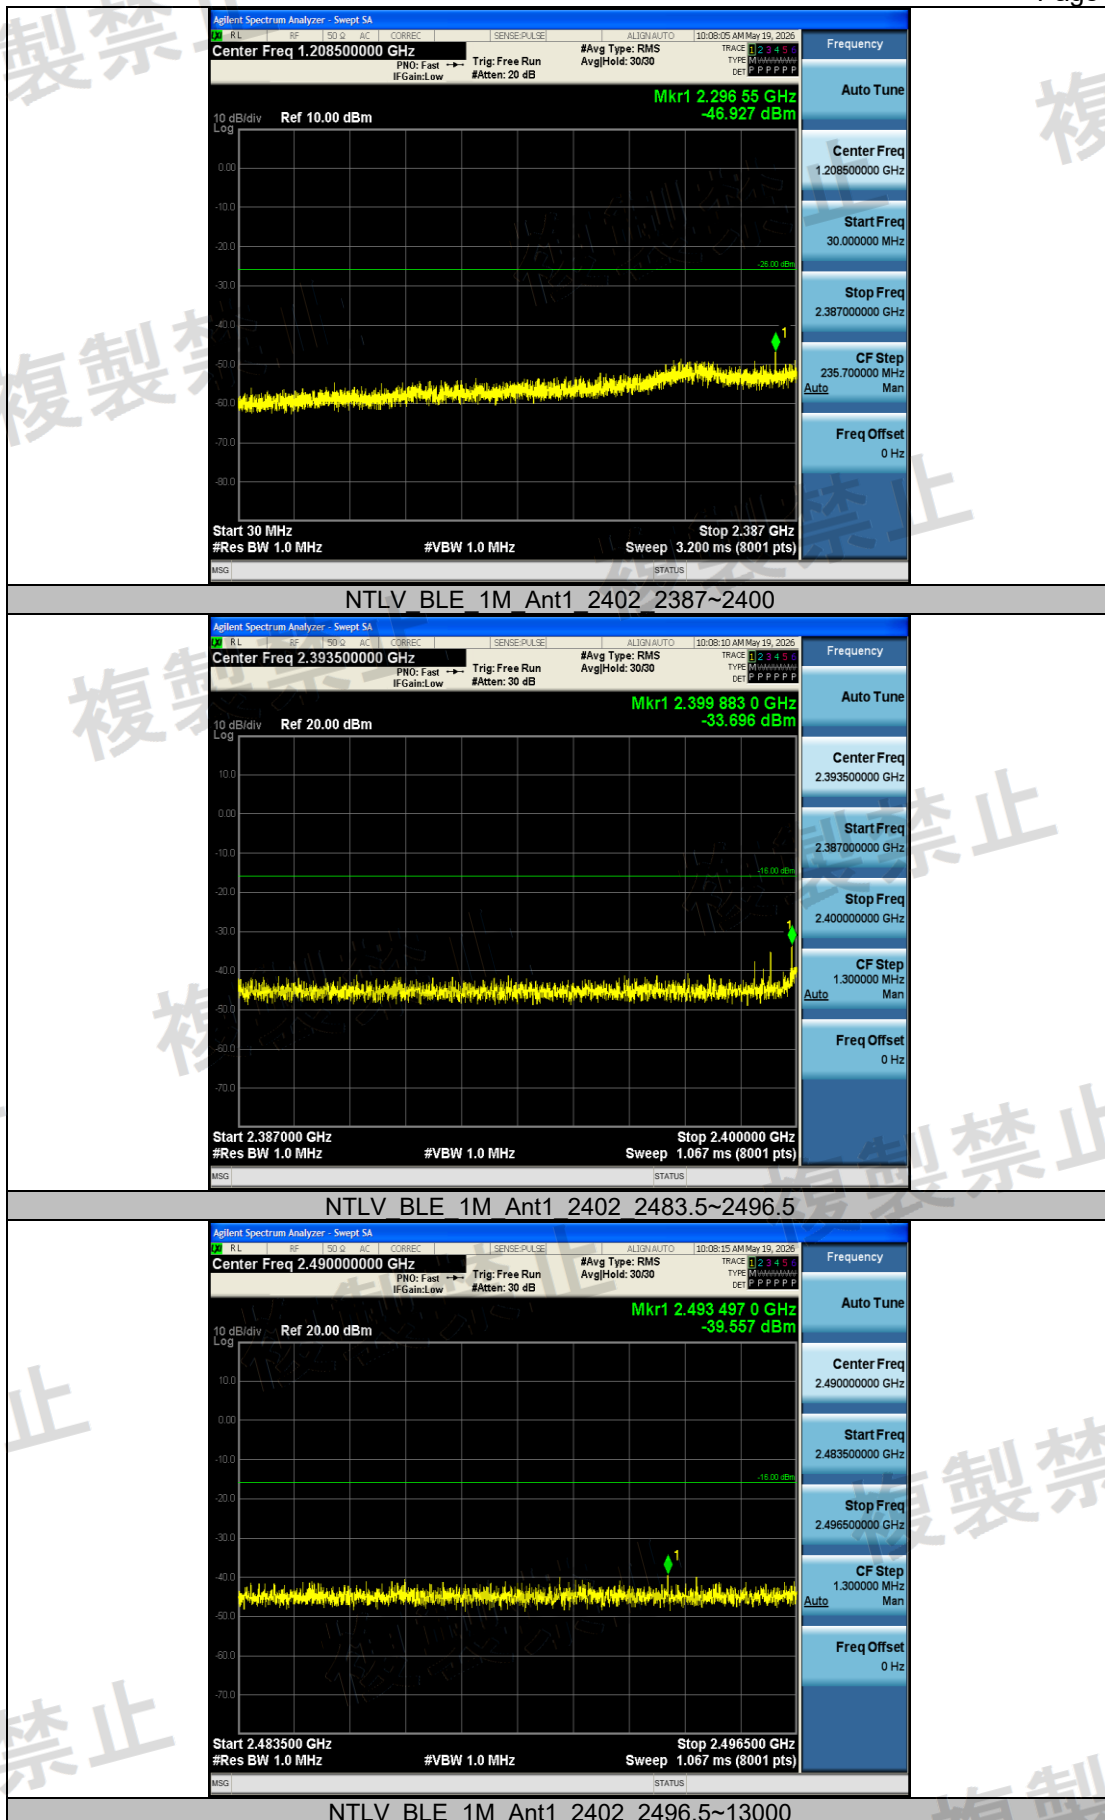


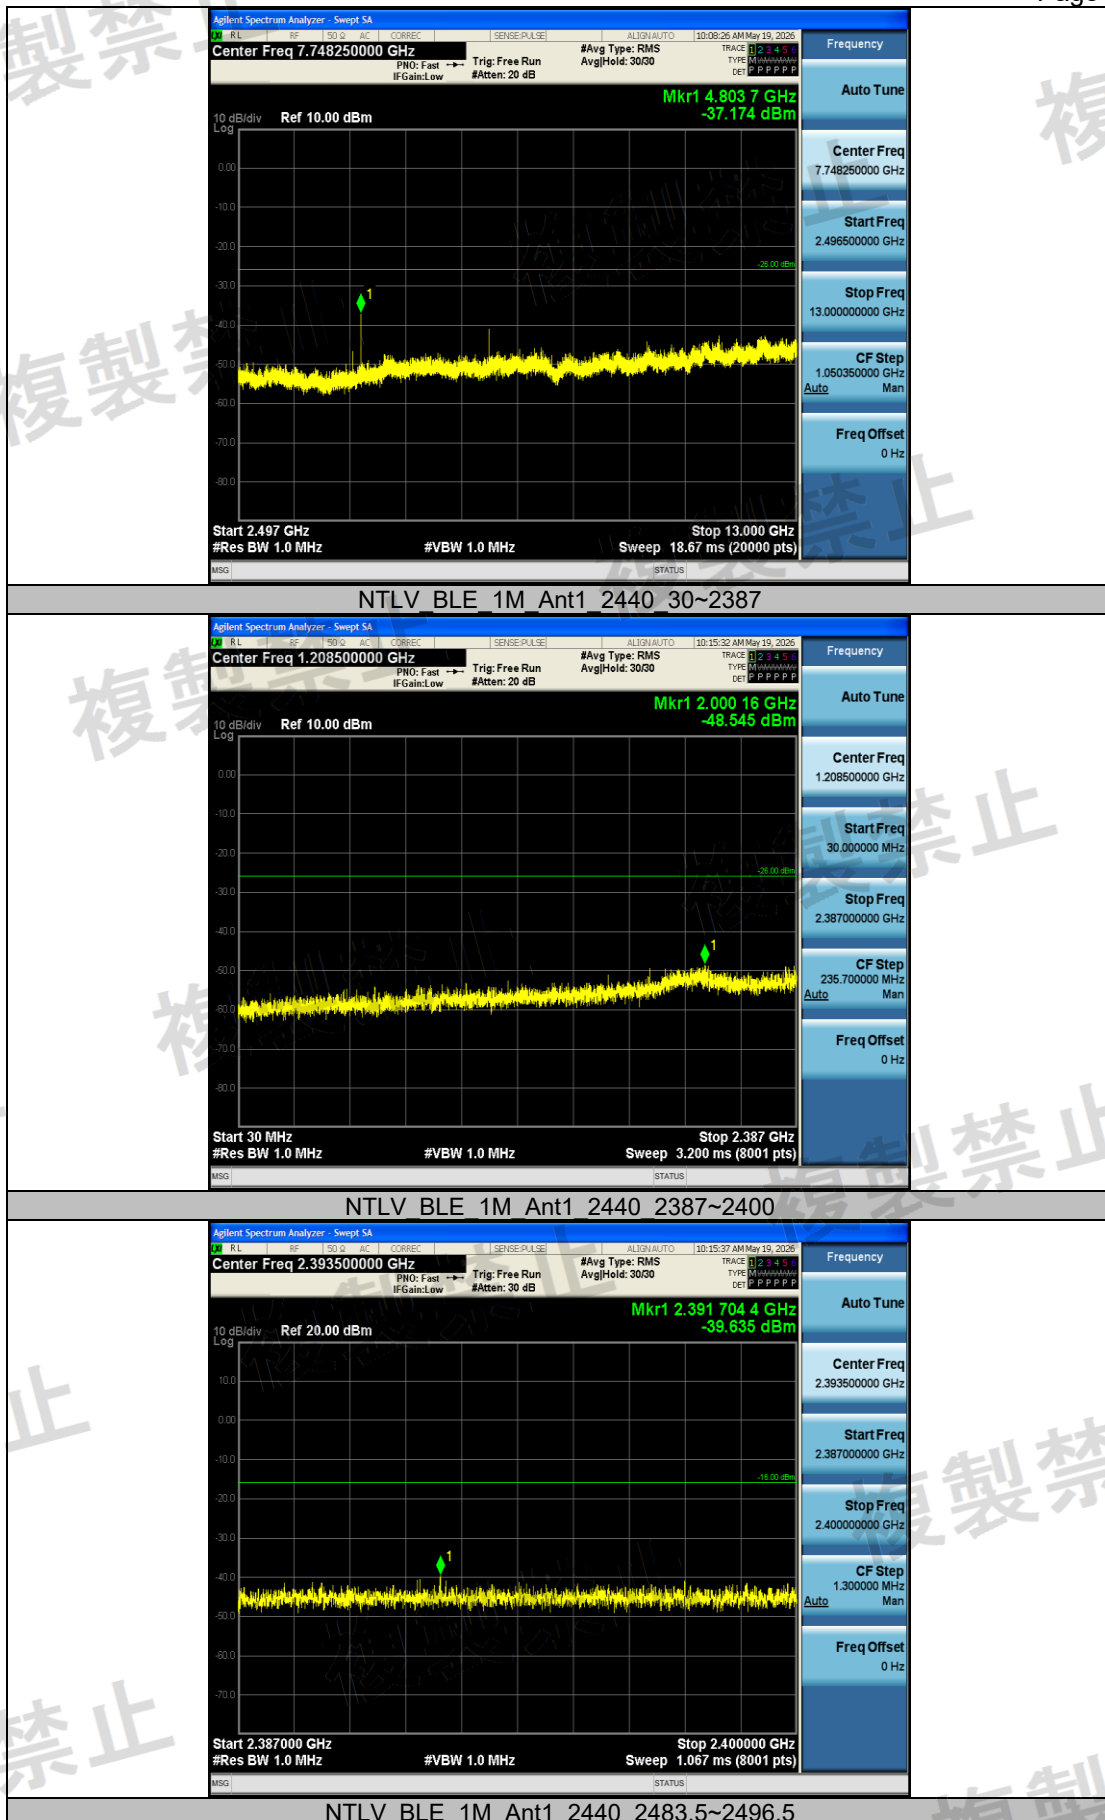


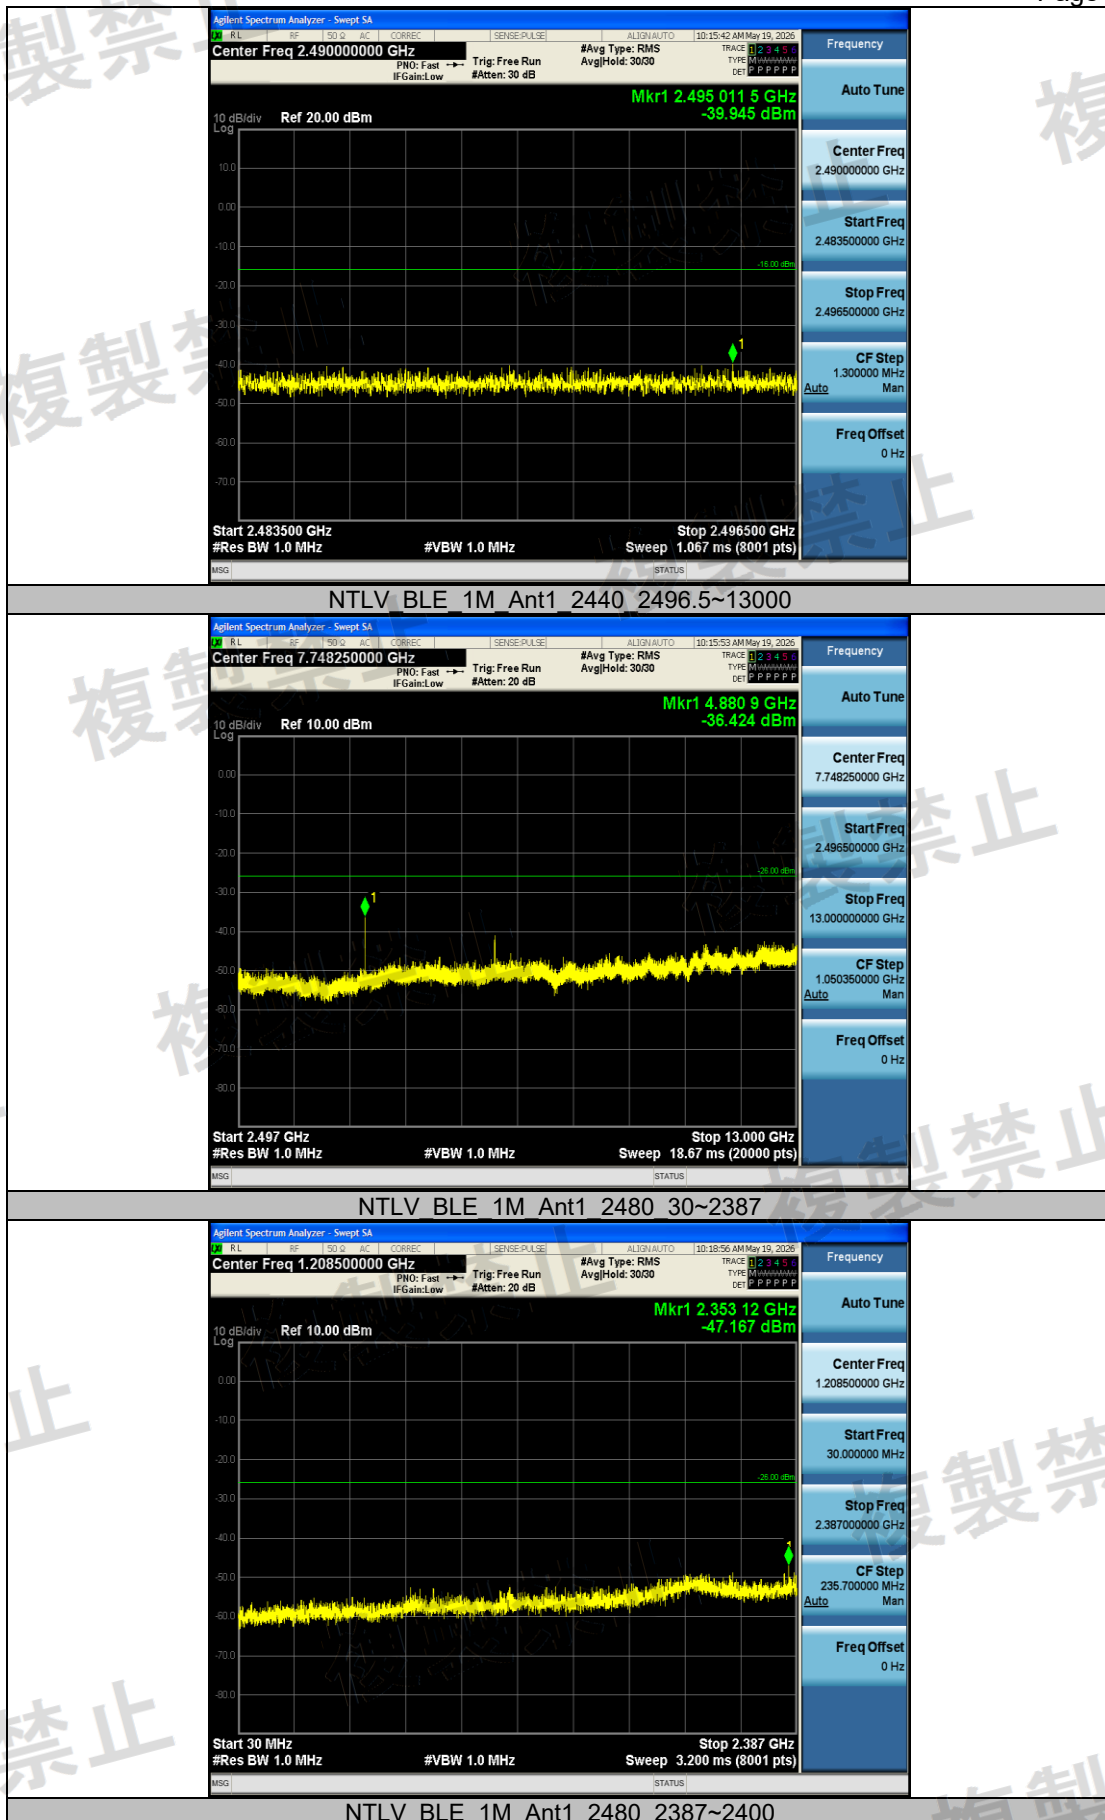


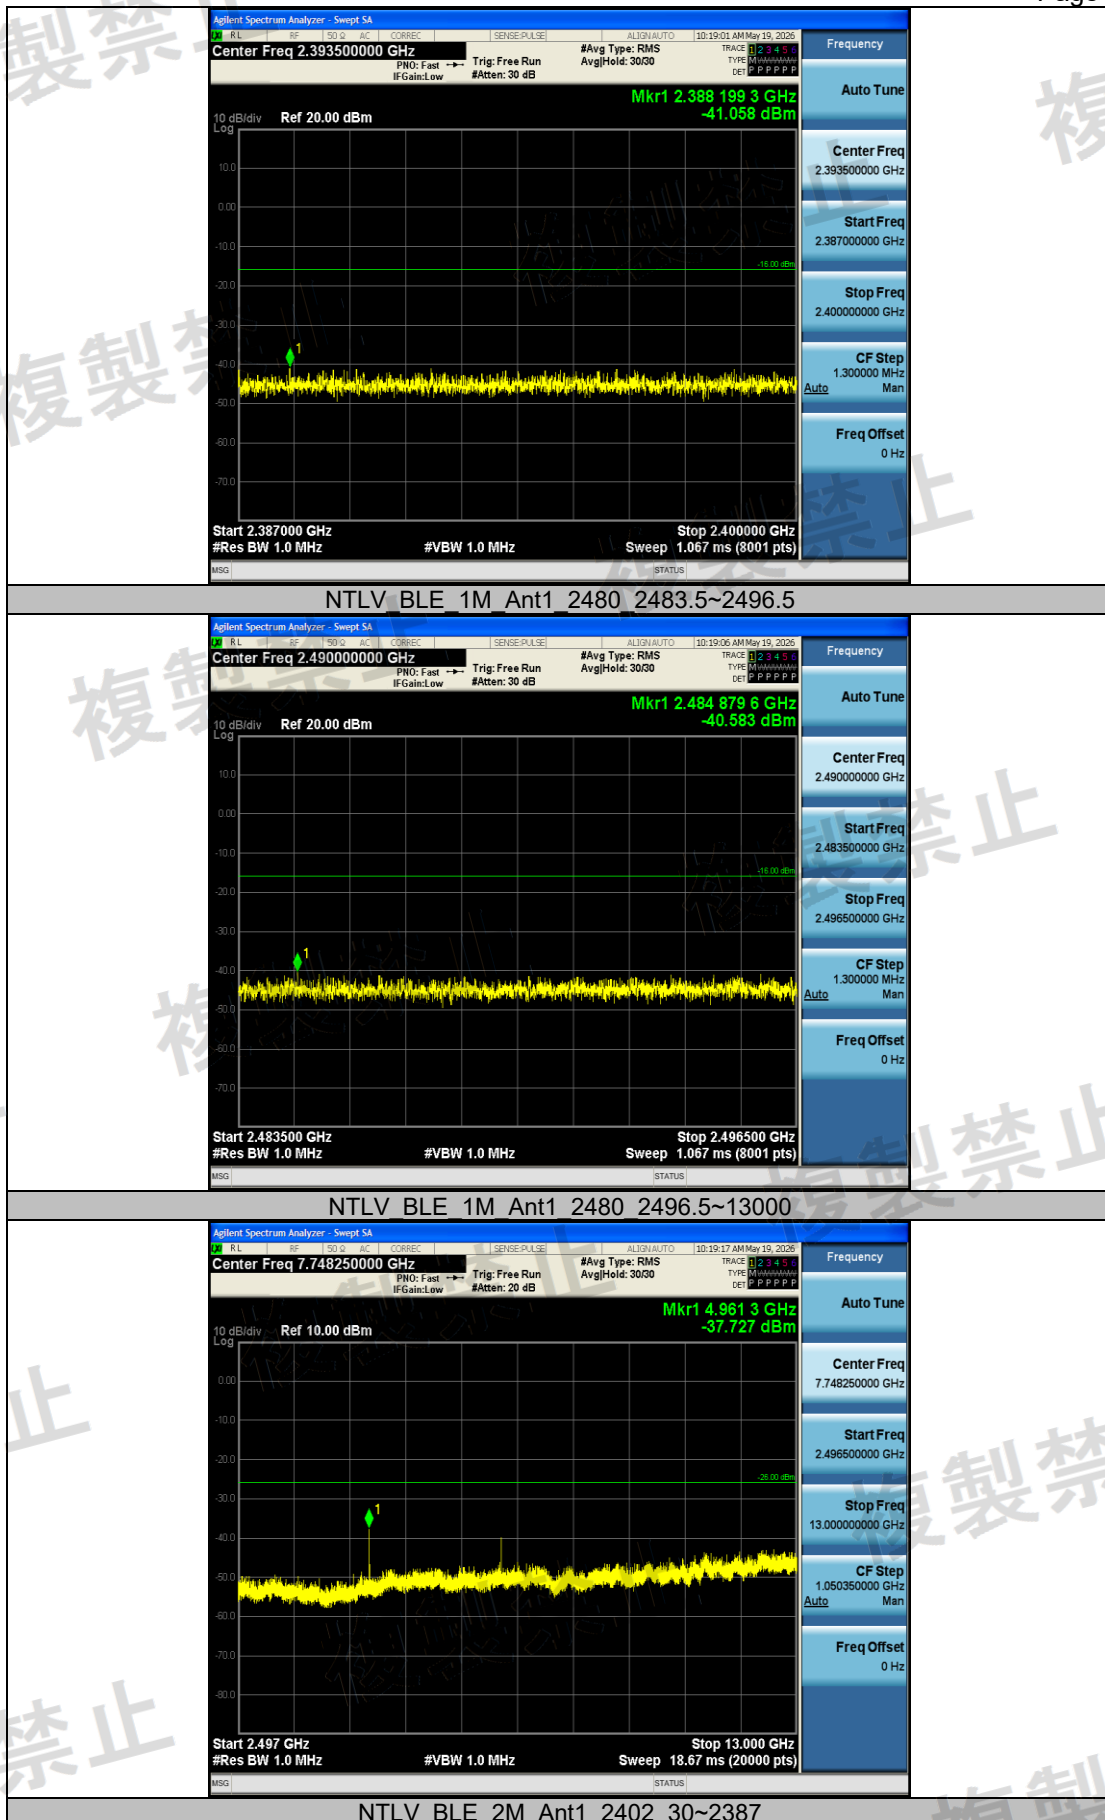


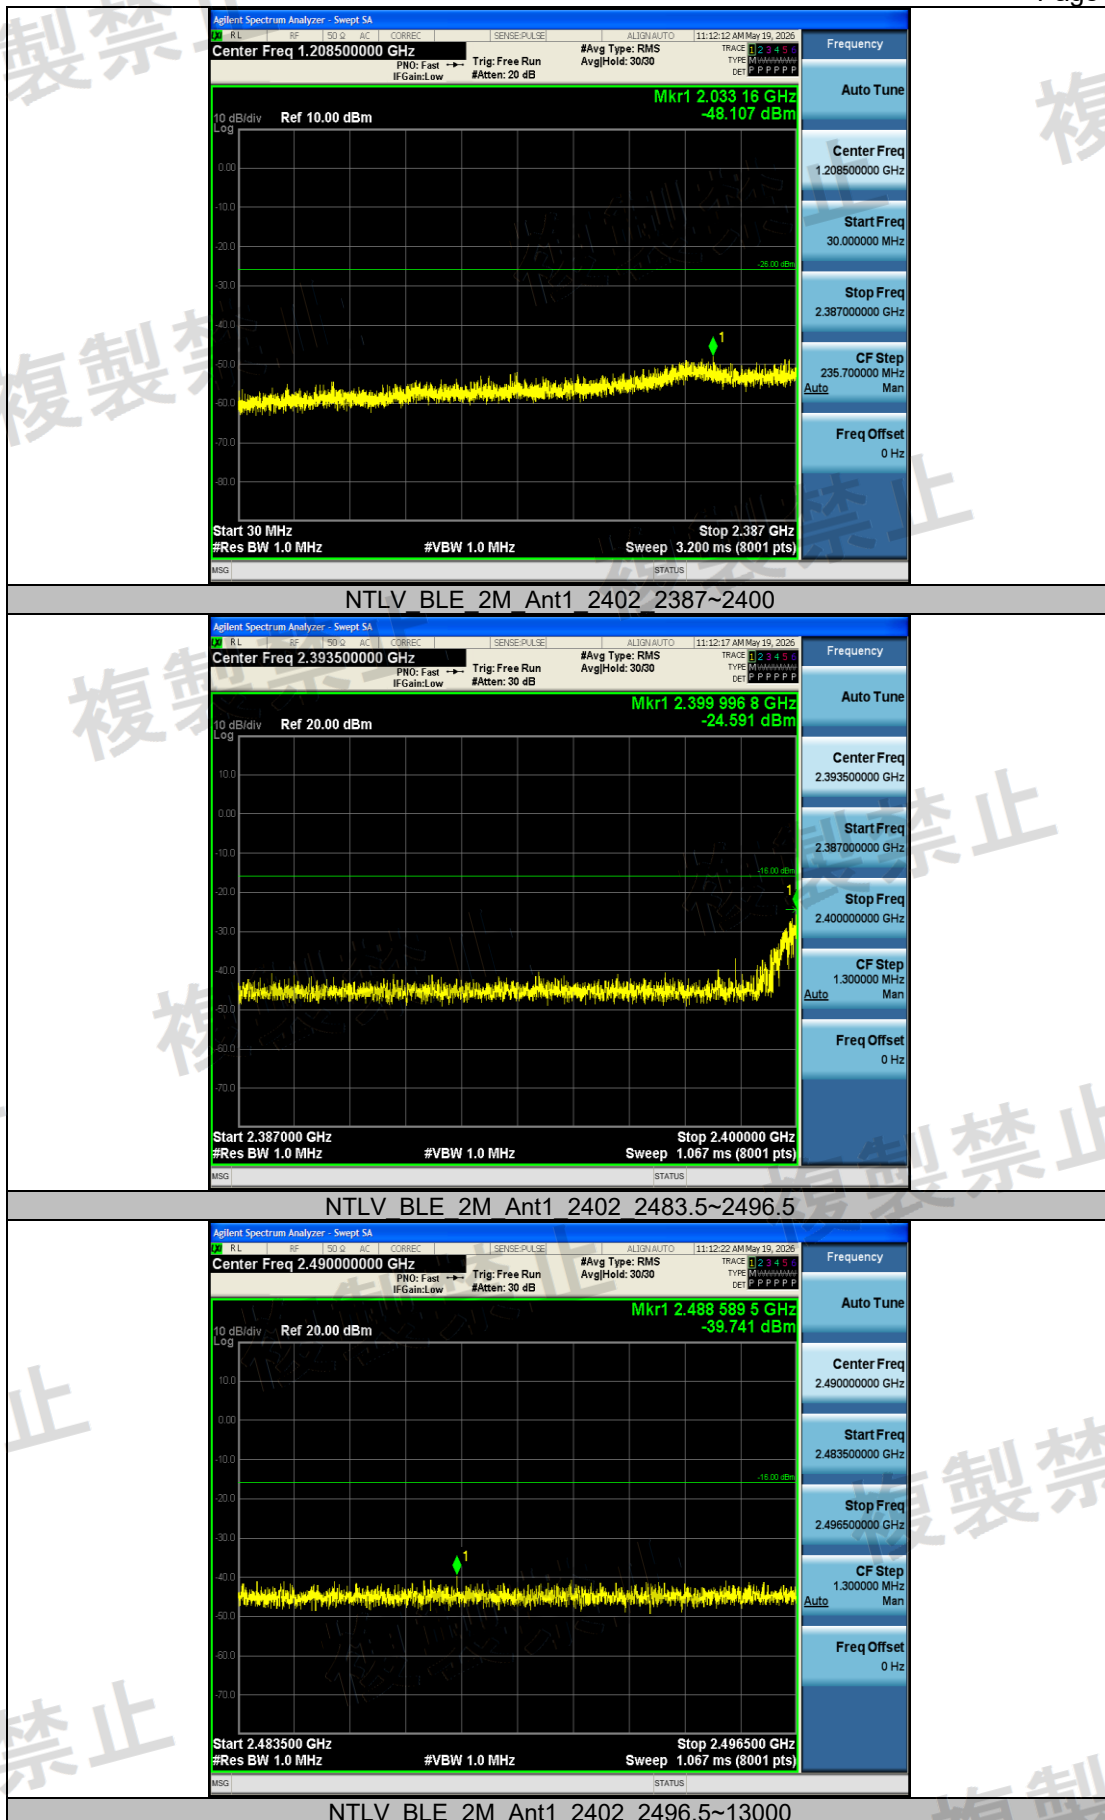


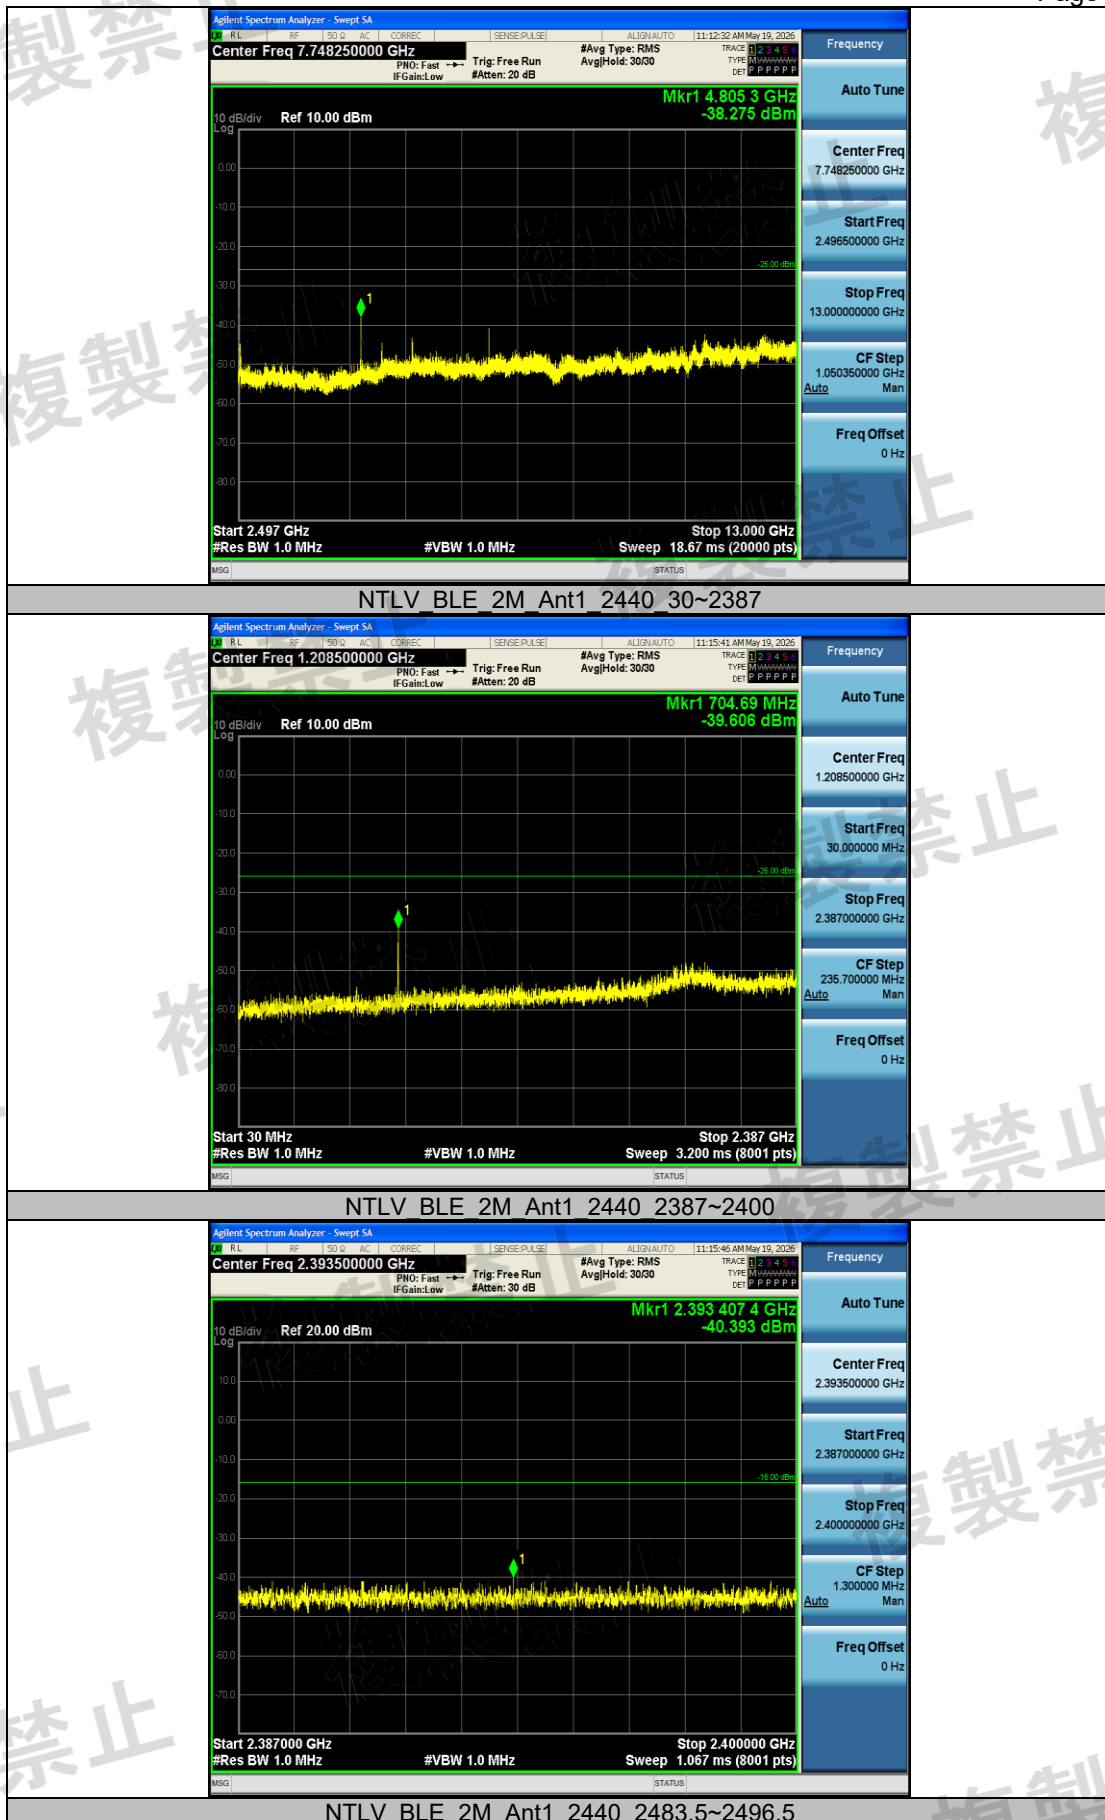


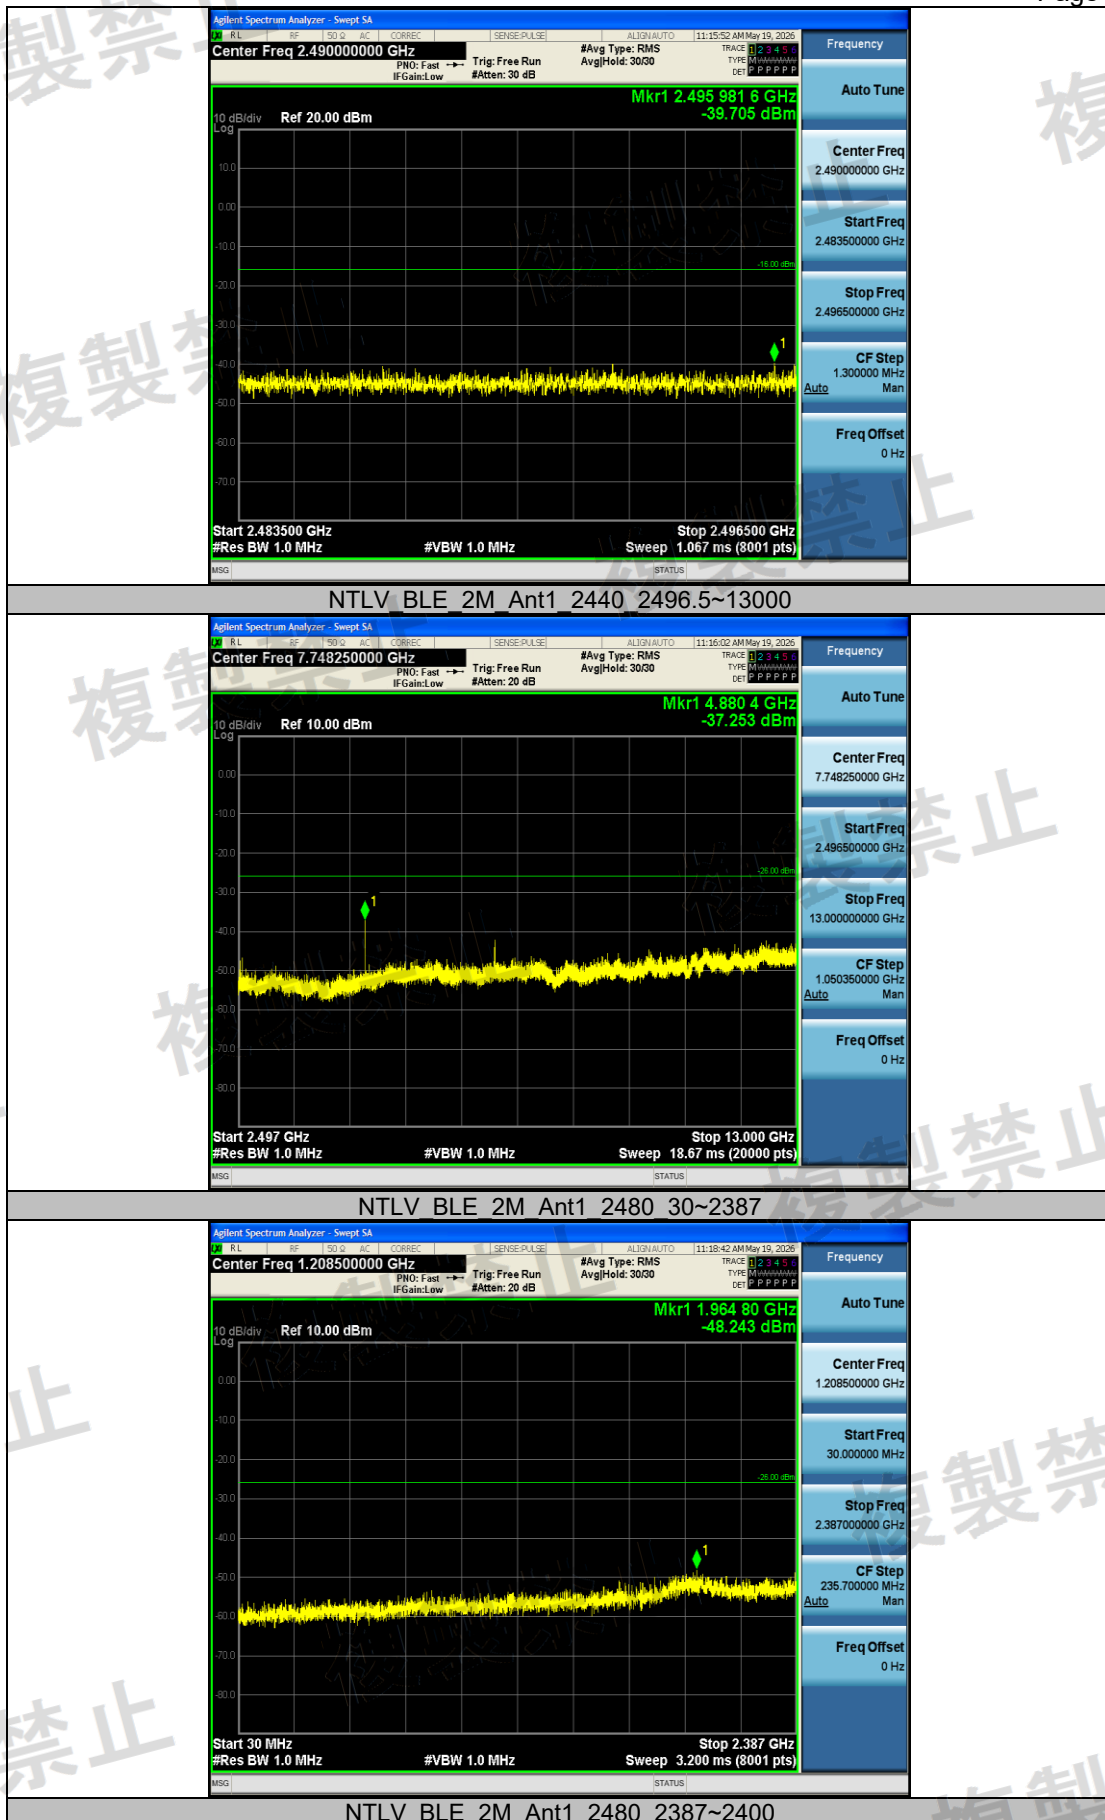


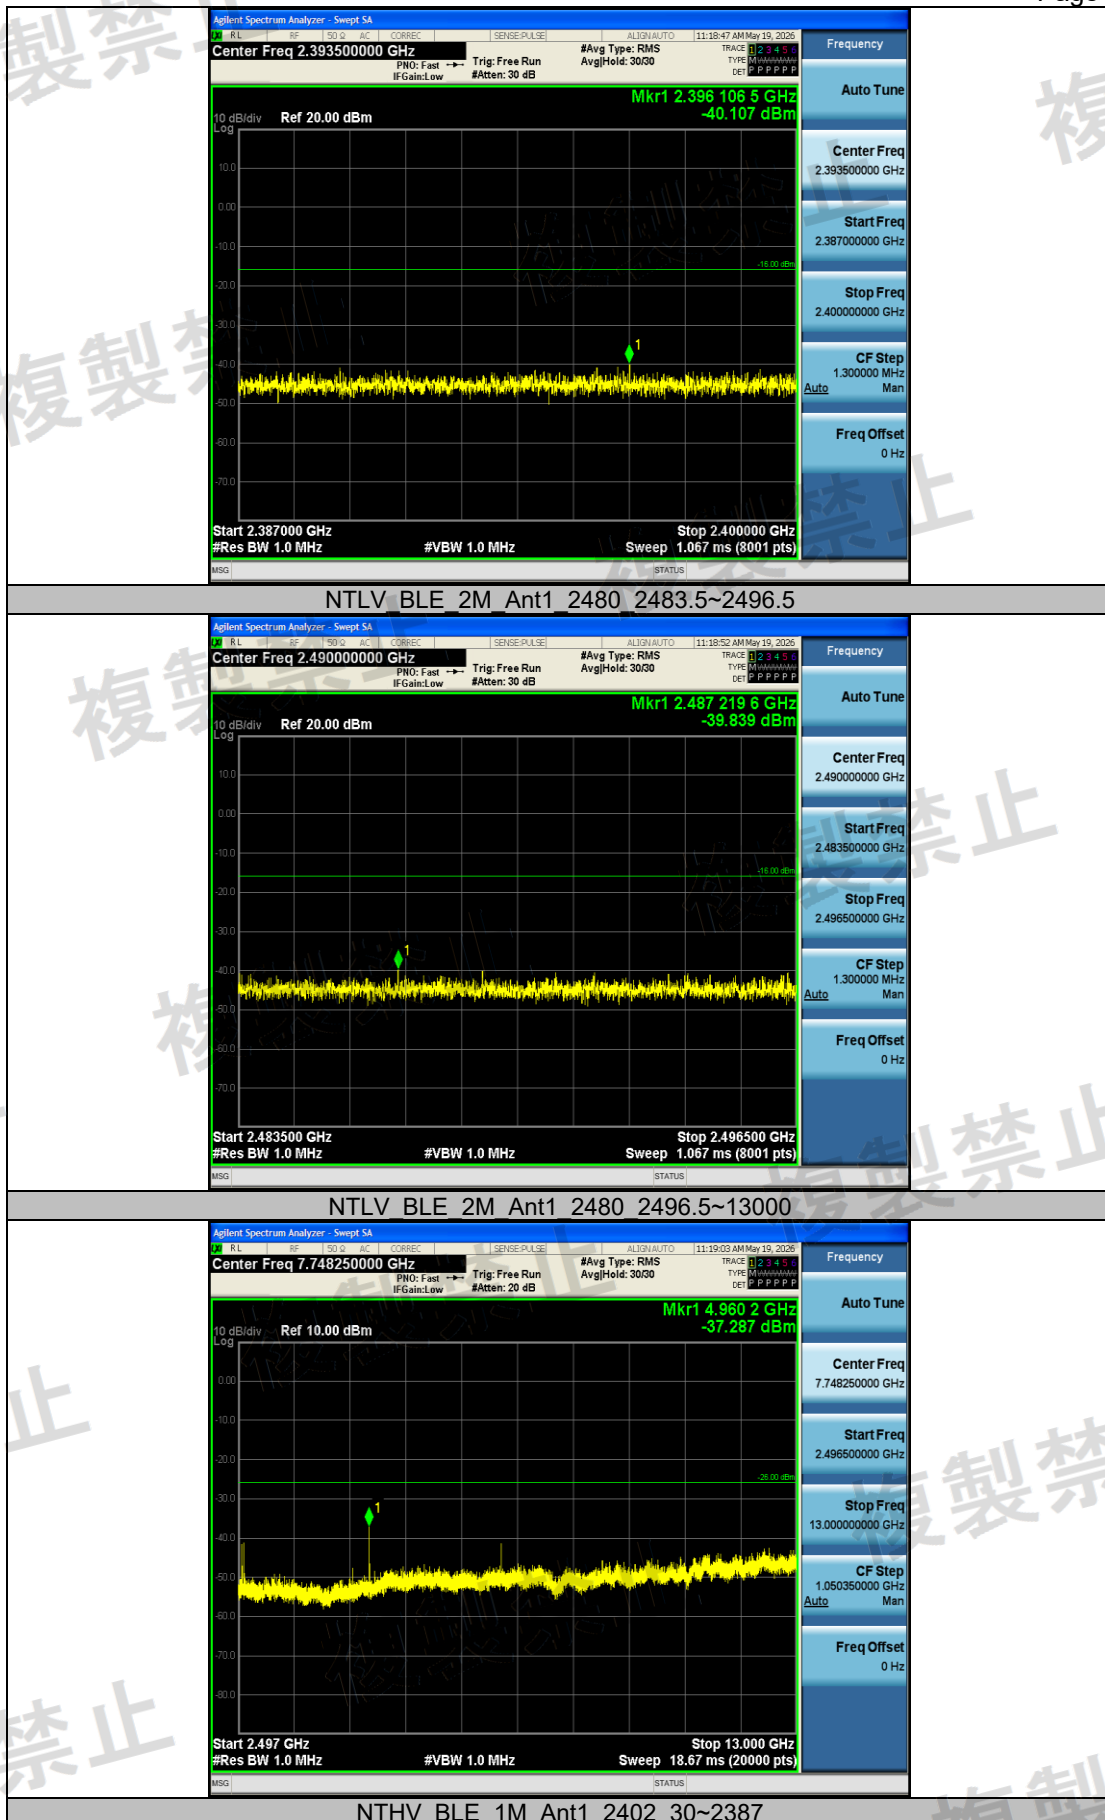


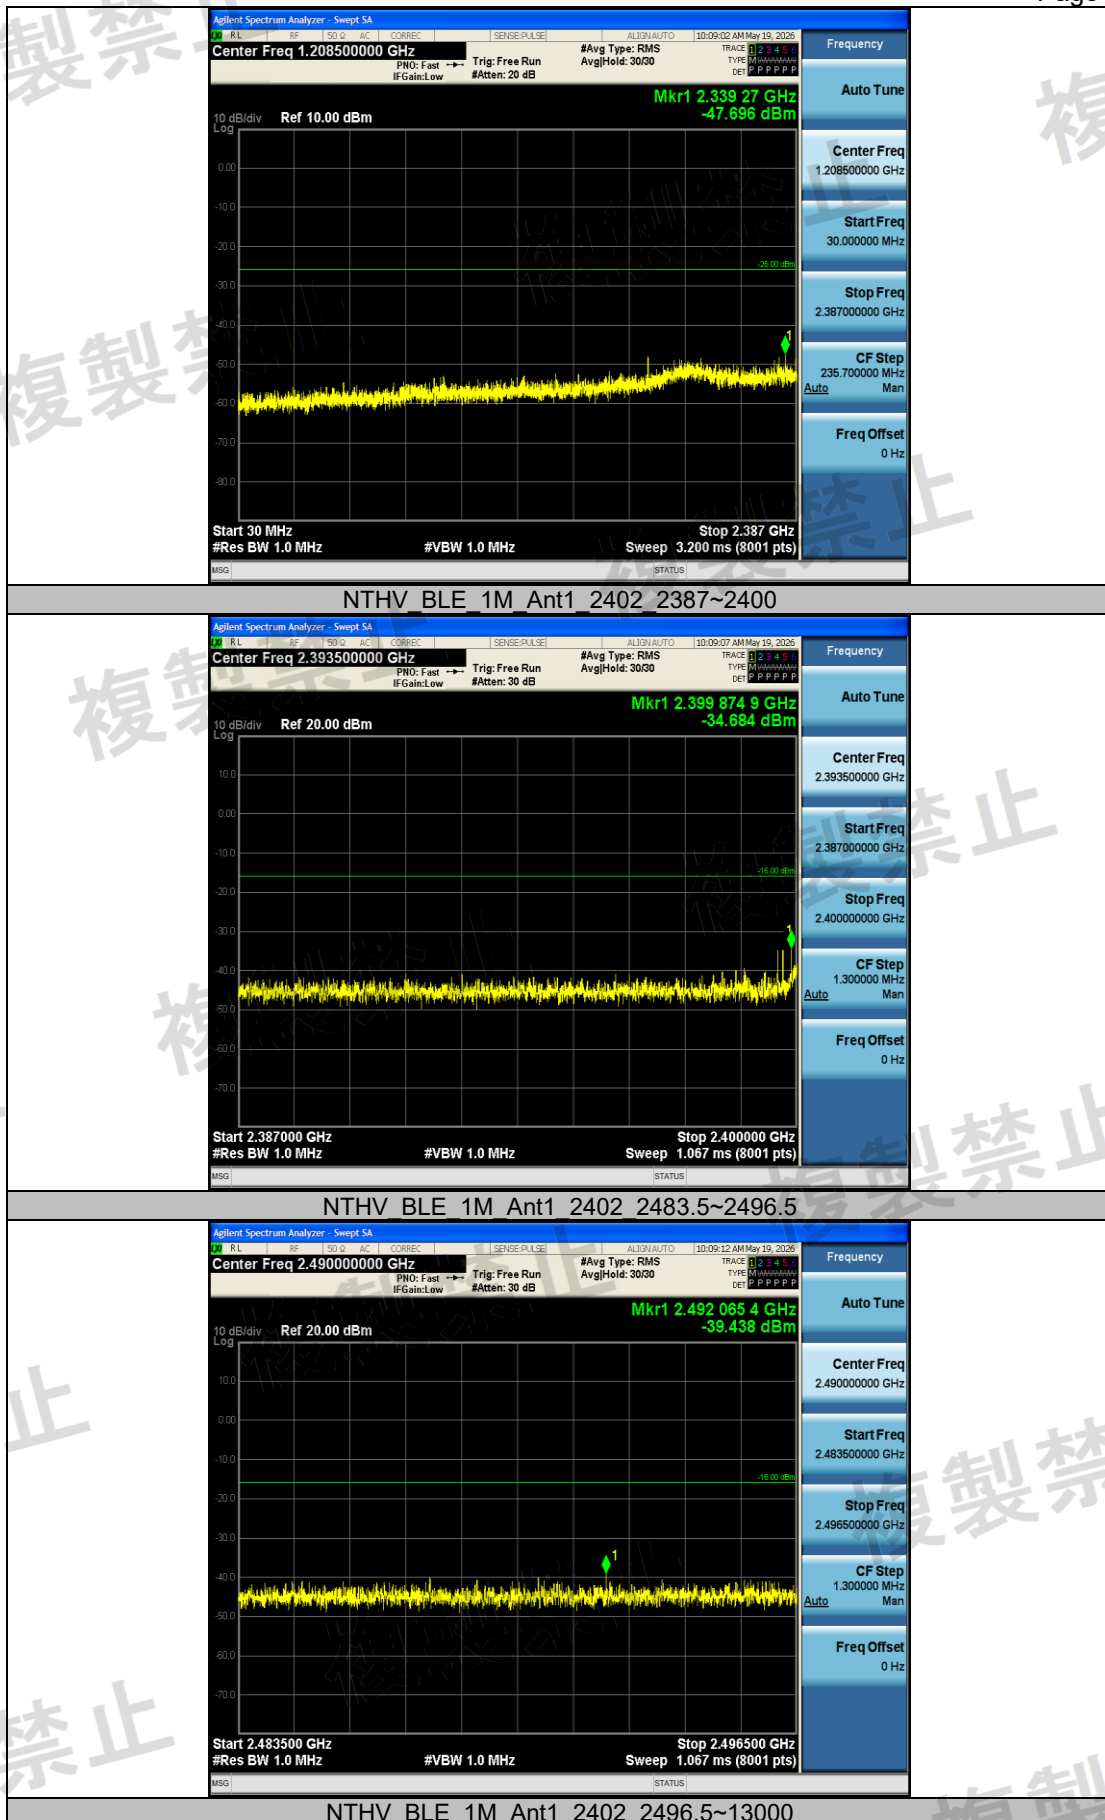


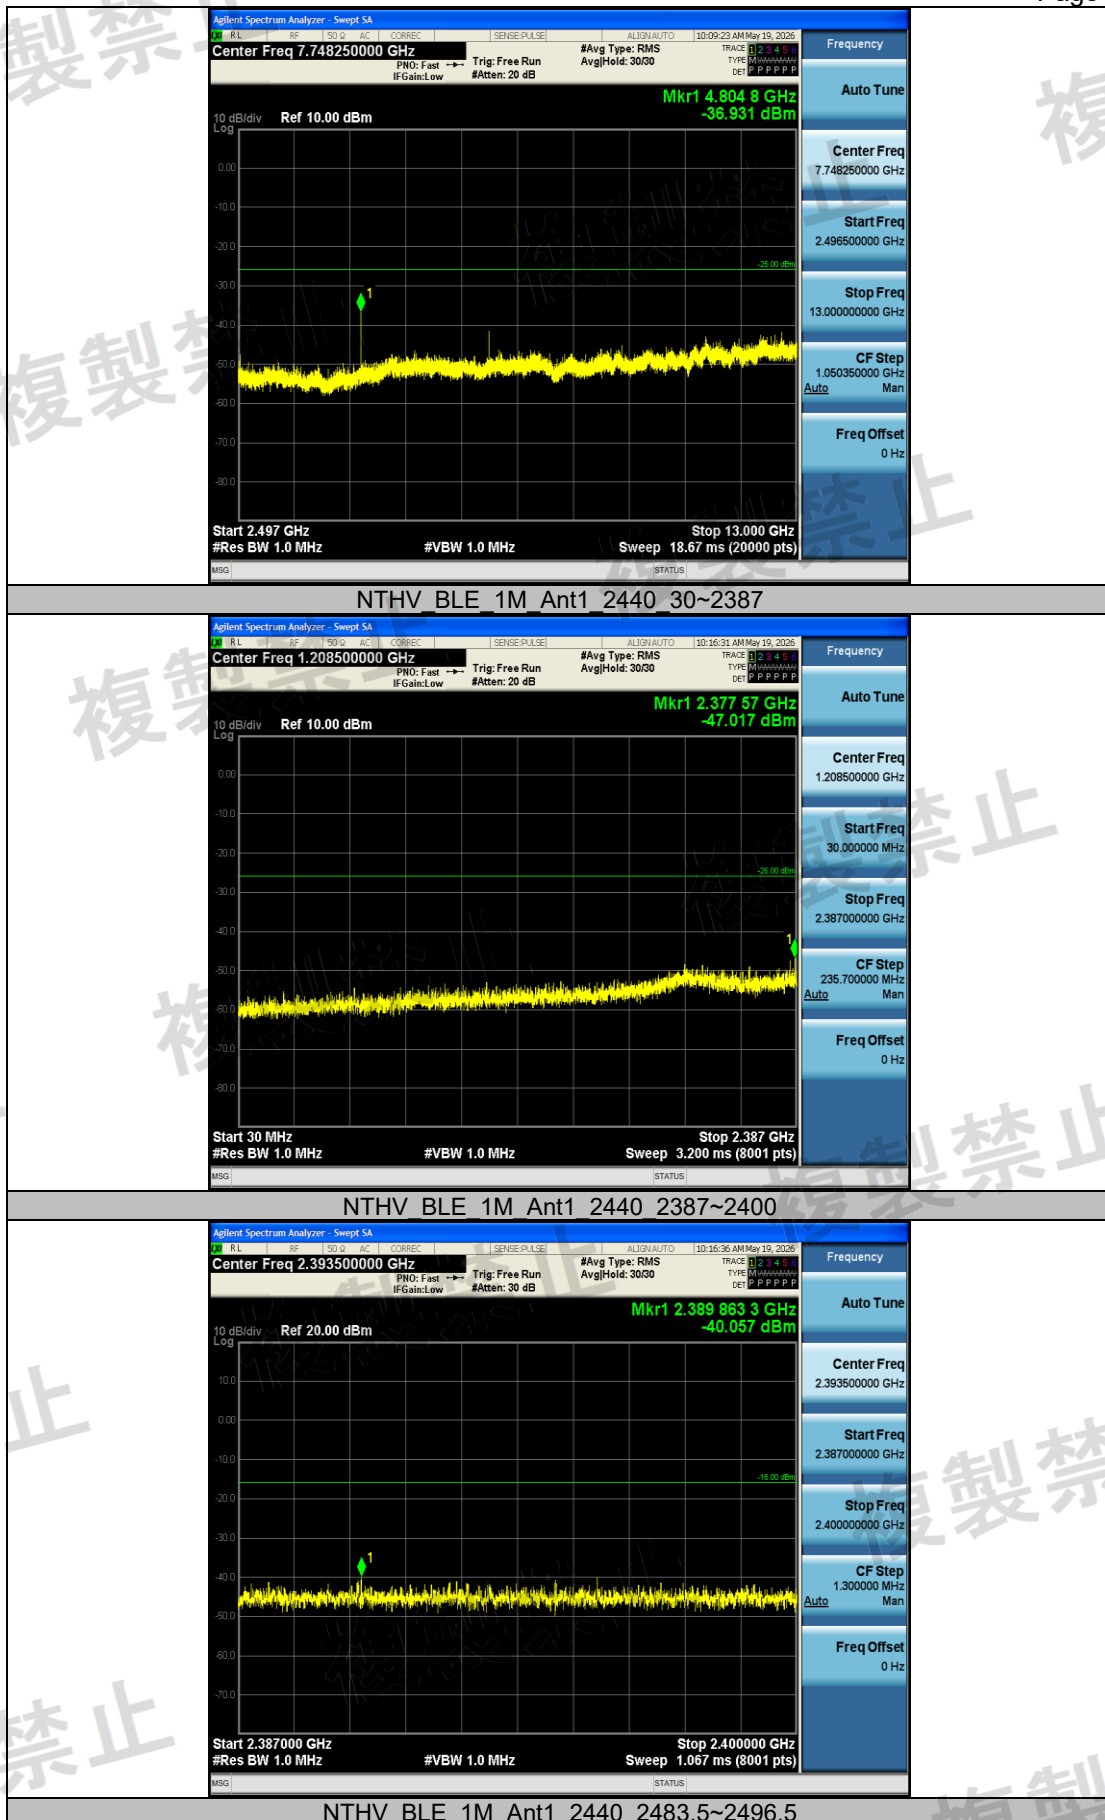


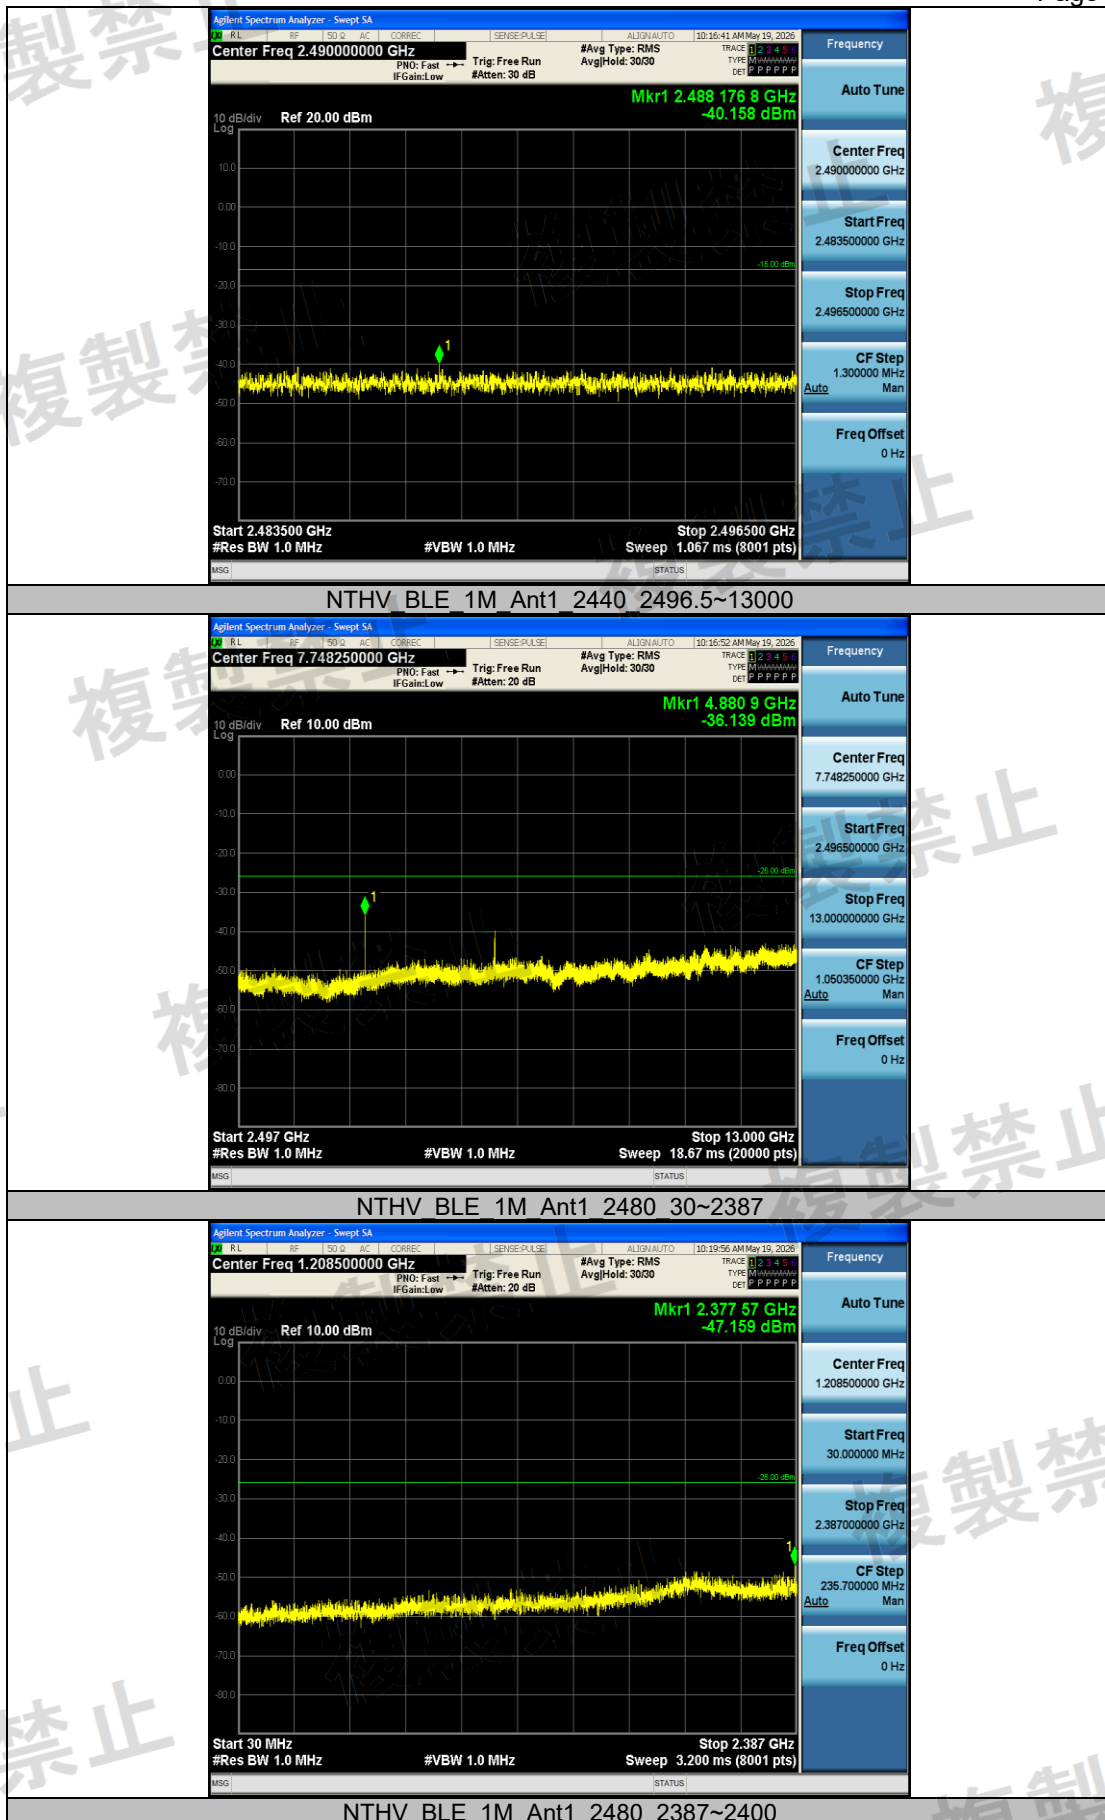


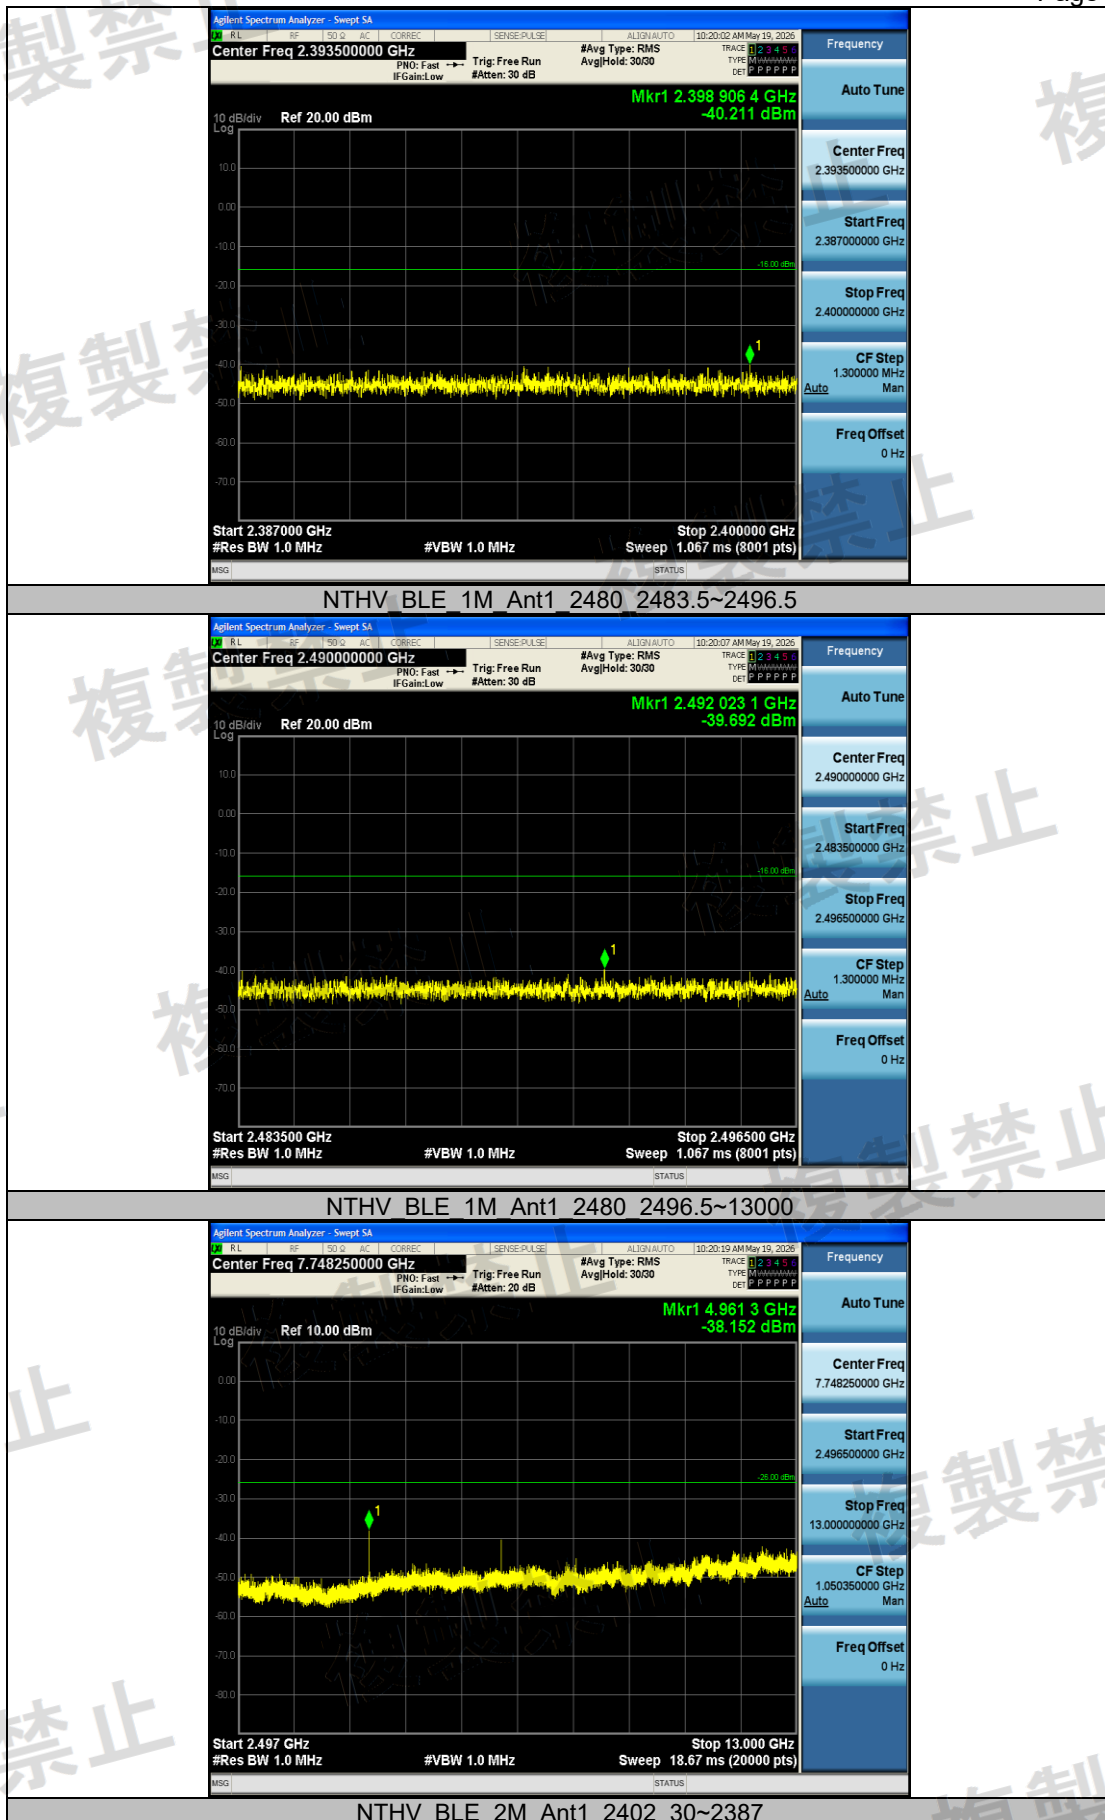

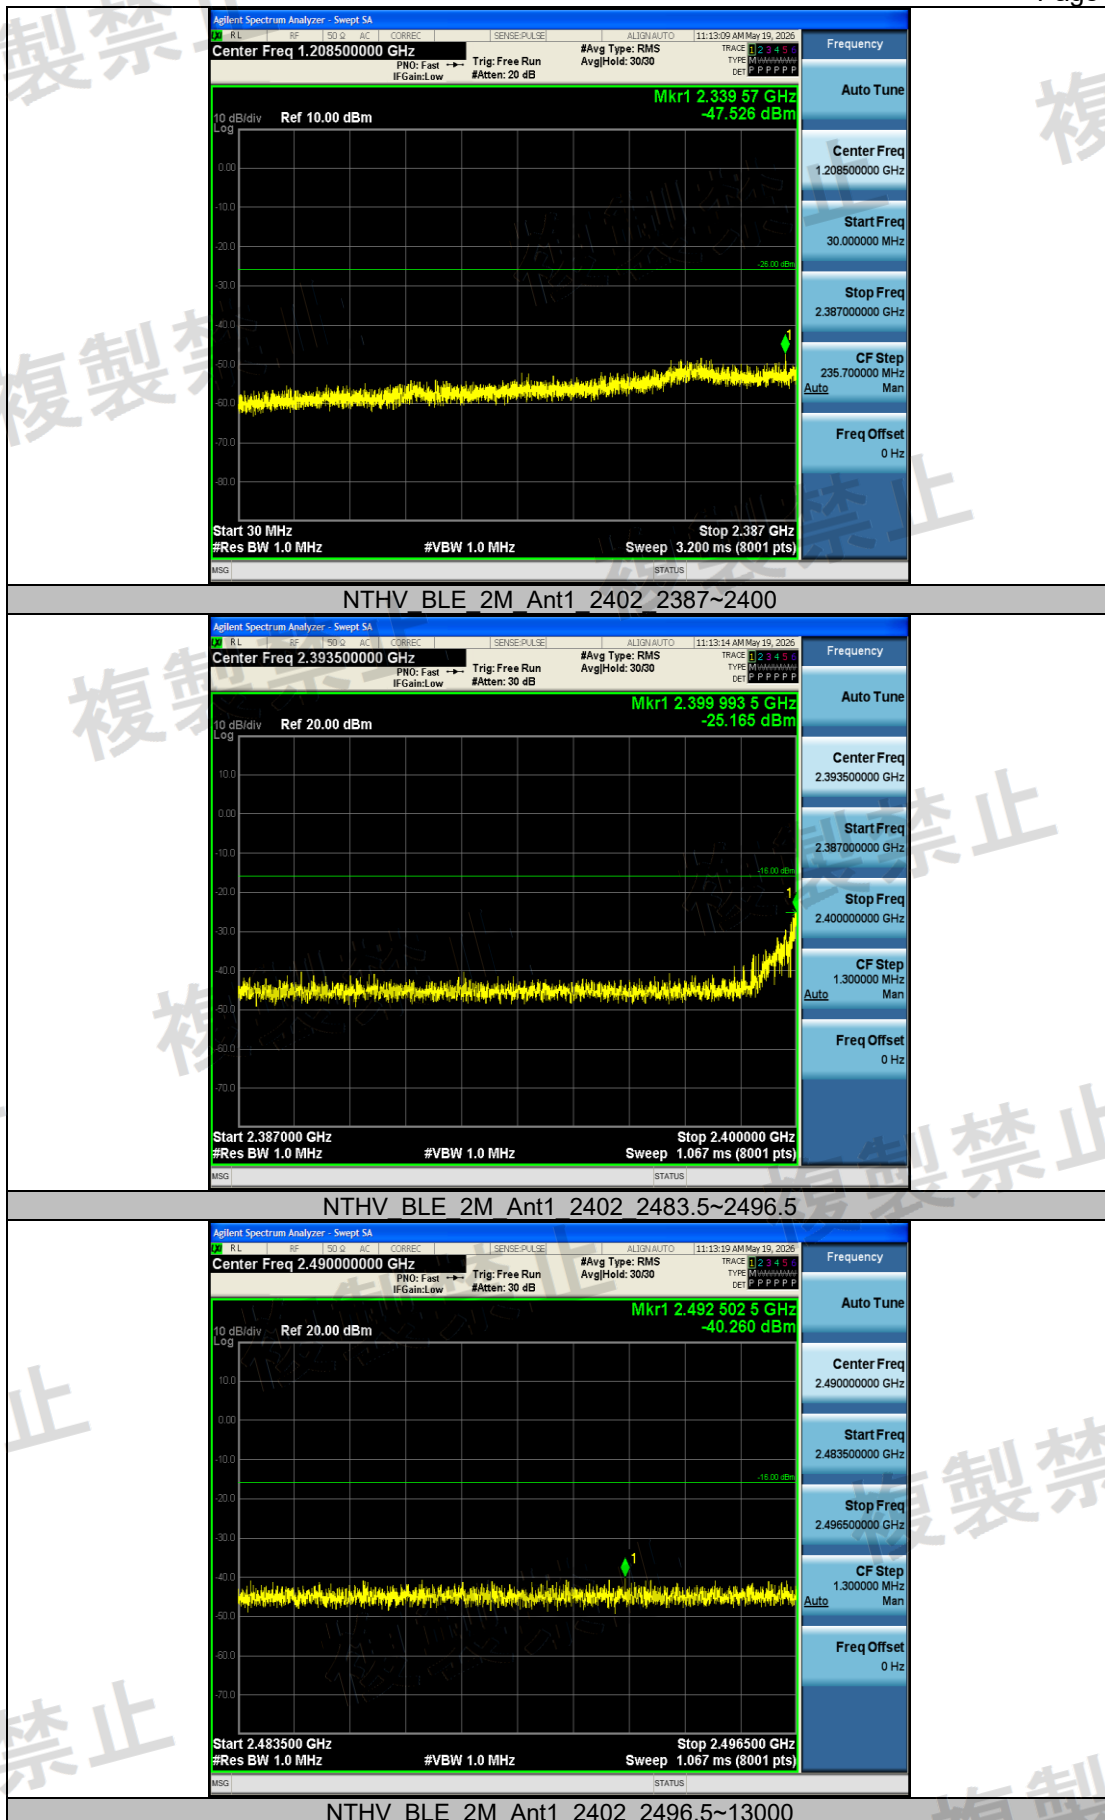

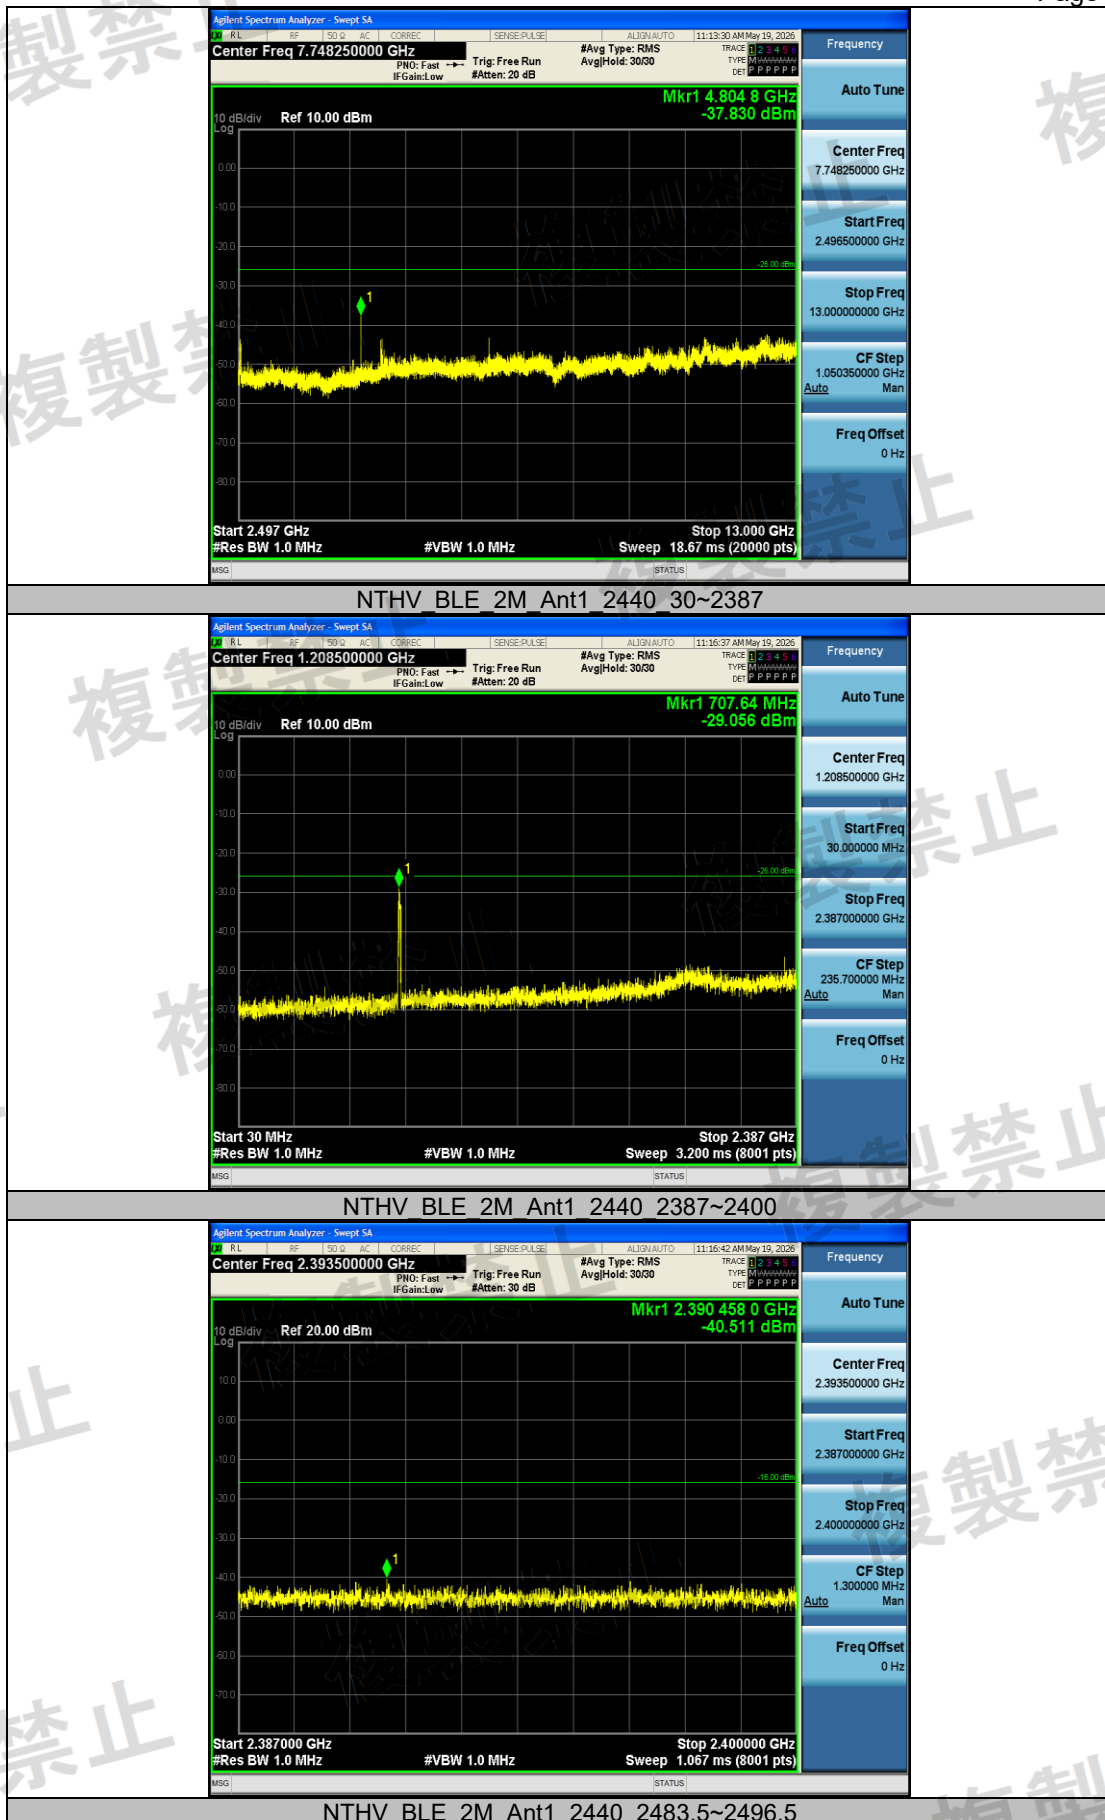

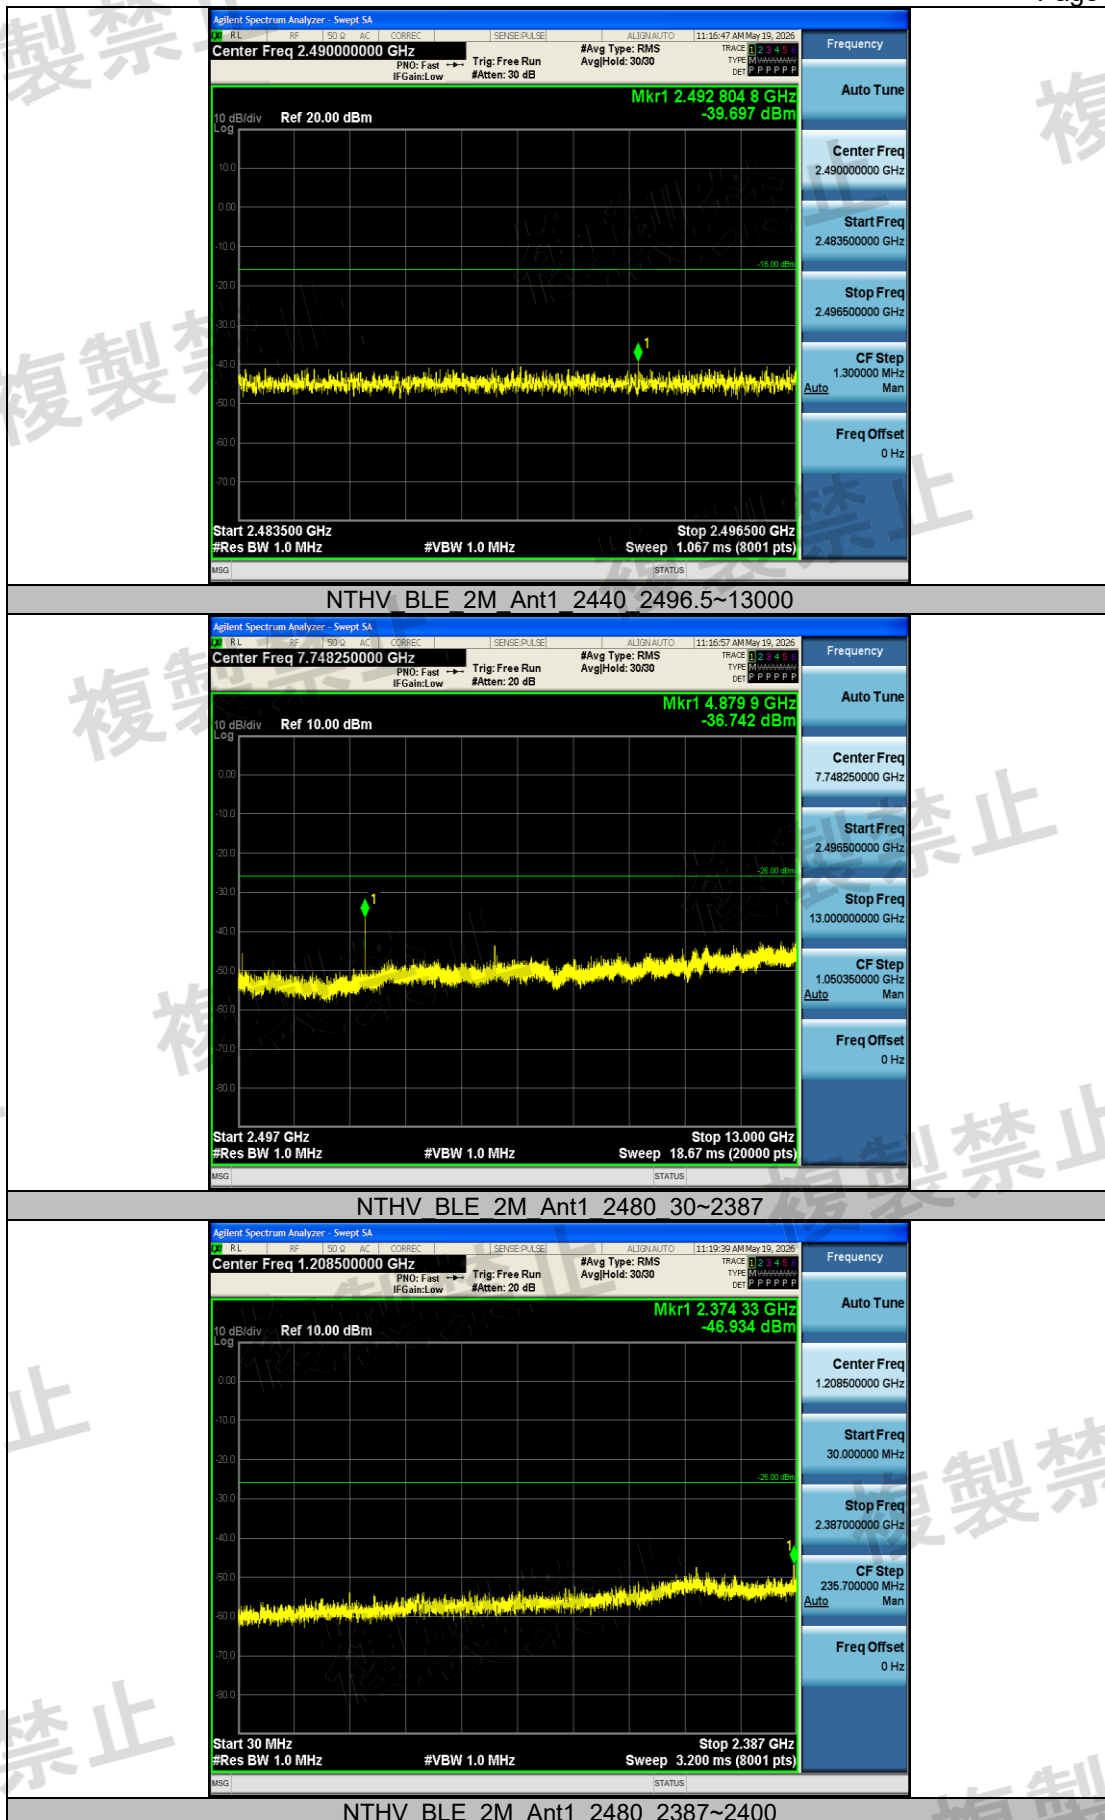


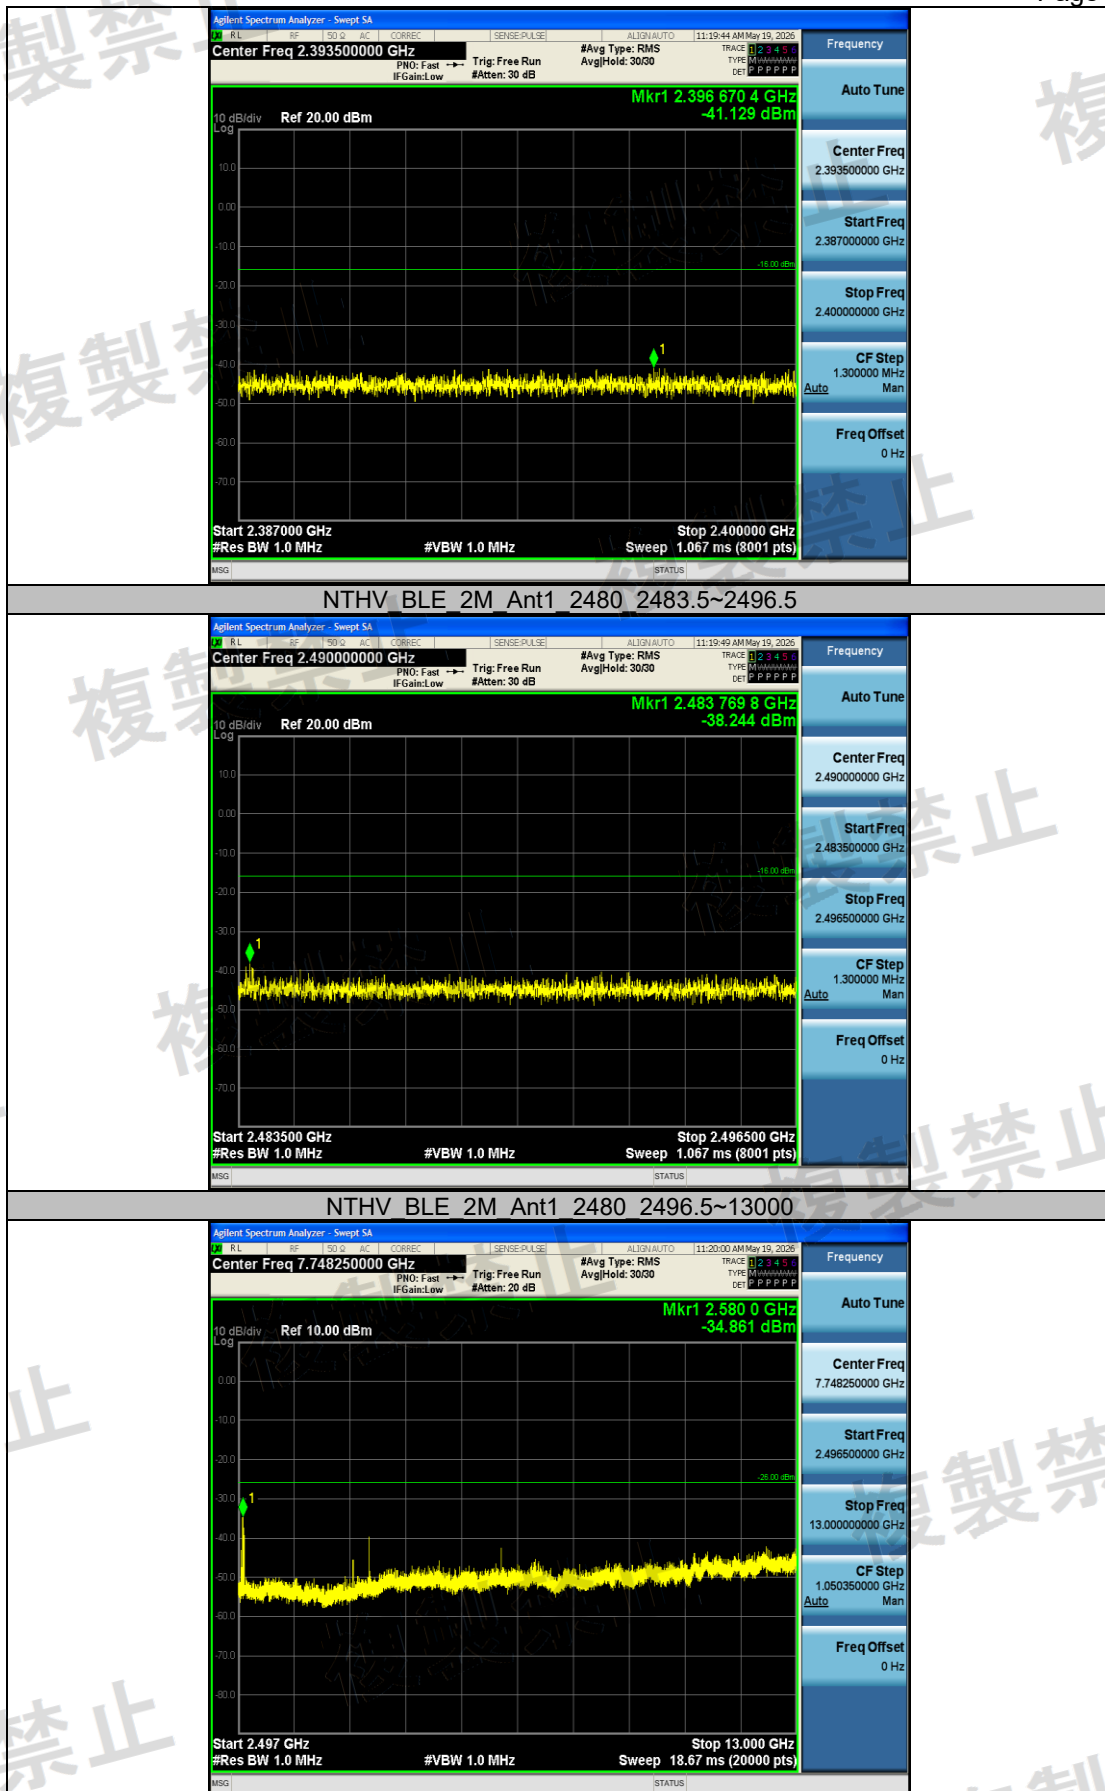



4.6. Limit of secondary radiated emissions

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

Frequency: 30MHz-13GHz

RBW:100KHz(30MHz-1GHz), 1MHz(1GHz-13GHz)

VBW:100KHz(30MHz-1GHz), 1MHz(1GHz-13GHz)

Sweep time:Auto

Dectector mode: Positive peak

Indication mode: max hold

LIMIT

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4 nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit

TEST RESULTS

Test Condition	Test Mode	Antenna	Freq (MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	924.70	-72.26	≤-54	0.05943	≤4	PASS
				1000~13000	12353.77	-62.67	≤-47	0.54075	≤20	PASS
			2440	30~1000	986.66	-72.58	≤-54	0.05521	≤4	PASS
				1000~13000	12436.57	-63.32	≤-47	0.46559	≤20	PASS
			2480	30~1000	923.01	-71.88	≤-54	0.06486	≤4	PASS
				1000~13000	5759.44	-61.15	≤-47	0.76736	≤20	PASS
	BLE_2M	Ant1	2402	30~1000	910.64	-72.00	≤-54	0.06310	≤4	PASS
				1000~13000	12858.99	-62.57	≤-47	0.55335	≤20	PASS
			2440	30~1000	761.99	-72.70	≤-54	0.05370	≤4	PASS
				1000~13000	12362.17	-63.15	≤-47	0.48417	≤20	PASS
			2480	30~1000	856.44	-72.26	≤-54	0.05943	≤4	PASS
				1000~13000	12723.99	-62.76	≤-47	0.52966	≤20	PASS
NTLV	BLE_1M	Ant1	2402	30~1000	857.29	-72.19	≤-54	0.06039	≤4	PASS
				1000~13000	12362.77	-63.20	≤-47	0.47863	≤20	PASS
			2440	30~1000	901.91	-72.11	≤-54	0.06152	≤4	PASS

