

Test Mode: IEEE 802.11ax(HE80) - W53


| Test Voltage                                        |     | Normal Voltage | Remarks                                 |
|-----------------------------------------------------|-----|----------------|-----------------------------------------|
| Test Frequency<br>(MHz)                             |     | 5290           | Low/Mid/High of test<br>frequency range |
| Limitation of<br>Collateral Emission<br>of Receiver | MHz | 829.28         | Limit $\leq 4$ nW<br>(-54 dBm)          |
|                                                     | nW  | 0.0270         |                                         |
|                                                     | MHz | 25350.00       | Limit $\leq 20$ nW<br>(-47 dBm)         |
|                                                     | nW  | 0.9705         |                                         |

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$ 

X = the total number of antennas

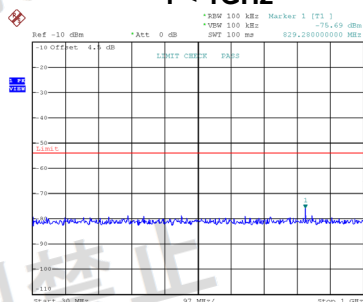CH58  
 $f < 1\text{GHz}$ 

Date: 21.NOV.2025 15:39:41

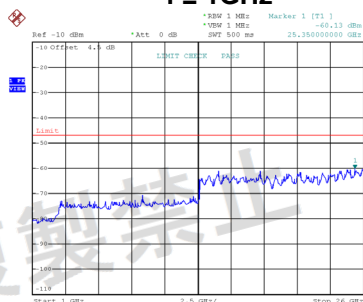 $f \geq 1\text{GHz}$ 

Date: 21.NOV.2025 15:39:51

Test Mode: IEEE 802.11be(EHT20) - W53

| Test Voltage                                        |     | Normal Voltage |          |          | Remarks                                 |
|-----------------------------------------------------|-----|----------------|----------|----------|-----------------------------------------|
| Test Frequency<br>(MHz)                             |     | 5260           | 5300     | 5320     | Low/Mid/High of test<br>frequency range |
| Limitation of<br>Collateral Emission<br>of Receiver | MHz | 885.54         | 767.20   | 910.76   | Limit $\leq 4$ nW<br>(-54 dBm)          |
|                                                     | nW  | 0.0175         | 0.0141   | 0.0139   |                                         |
|                                                     | MHz | 25350.00       | 26000.00 | 26000.00 | Limit $\leq 20$ nW<br>(-47 dBm)         |
|                                                     | nW  | 1.4689         | 1.4322   | 1.1169   |                                         |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor =  $10 \log (X)$ 

X = the total number of antennas

CH52

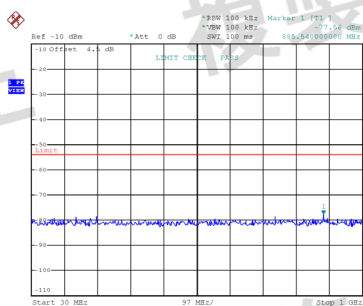


Date: 21.NOV.2025 15:21:59

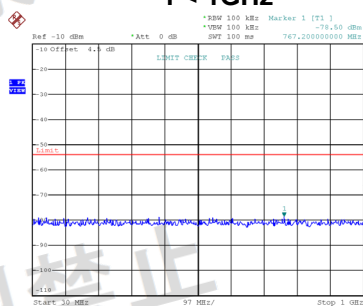CH60  
f < 1GHz


Date: 21.NOV.2025 15:22:23

CH64

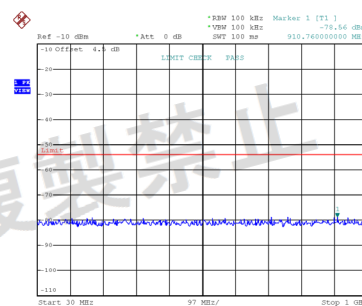


Date: 21.NOV.2025 15:22:44


f ≥ 1GHz

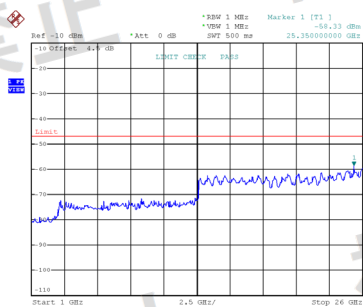

Date: 21.NOV.2025 15:22:09

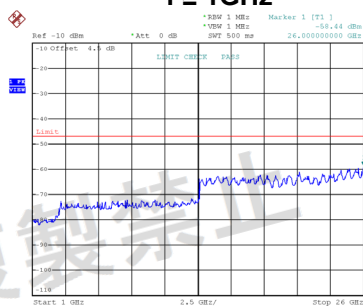

Date: 21.NOV.2025 15:22:33

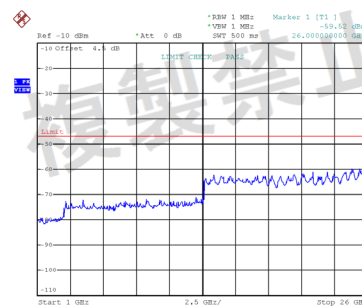

Date: 21.NOV.2025 15:22:54

Test Mode: IEEE 802.11be(EHT40) - W53

| Test Voltage                                        |     | Normal Voltage |          | Remarks                                 |
|-----------------------------------------------------|-----|----------------|----------|-----------------------------------------|
| Test Frequency<br>(MHz)                             |     | 5270           | 5310     | Low/Mid/High of test<br>frequency range |
| Limitation of<br>Collateral Emission<br>of Receiver | MHz | 709.00         | 761.38   | Limit $\leq 4$ nW<br>(-54 dBm)          |
|                                                     | nW  | 0.0157         | 0.0157   |                                         |
|                                                     | MHz | 26000.00       | 26000.00 | Limit $\leq 20$ nW<br>(-47 dBm)         |
|                                                     | nW  | 1.1967         | 1.1912   |                                         |


## Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor =  $10 \log (X)$ 

X = the total number of antennas

CH54

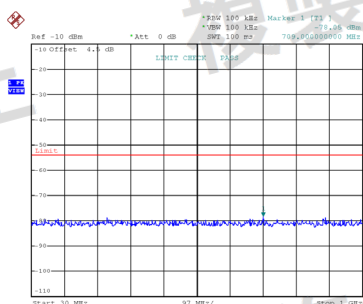


Date: 21.NOV.2025 15:32:01

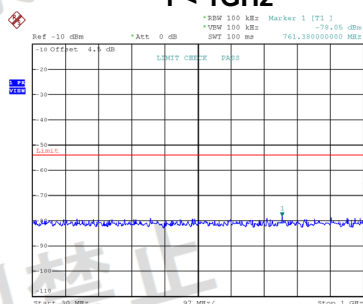
CH62  
f < 1GHz

Date: 21.NOV.2025 15:32:23

f ≥ 1GHz

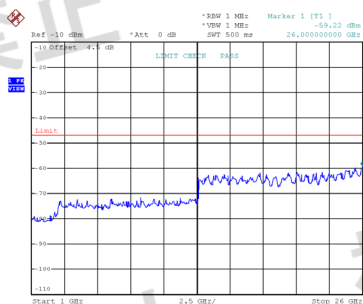

Date: 21.NOV.2025 15:32:11

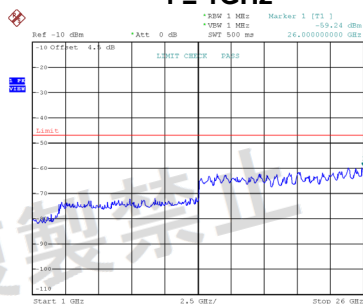

Date: 21.NOV.2025 15:32:32

Test Mode: IEEE 802.11be(EHT80) - W53


| Test Voltage                                        |     | Normal Voltage | Remarks                                 |
|-----------------------------------------------------|-----|----------------|-----------------------------------------|
| Test Frequency<br>(MHz)                             |     | 5290           | Low/Mid/High of test<br>frequency range |
| Limitation of<br>Collateral Emission<br>of Receiver | MHz | 972.84         | Limit $\leq 4$ nW<br>(-54 dBm)          |
|                                                     | nW  | 0.0143         |                                         |
|                                                     | MHz | 24900.00       | Limit $\leq 20$ nW<br>(-47 dBm)         |
|                                                     | nW  | 1.1561         |                                         |

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$ 

X = the total number of antennas

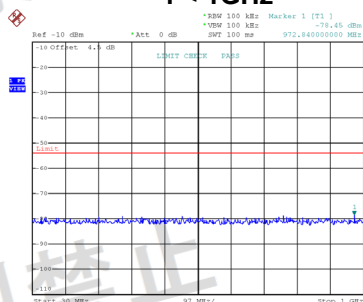CH58  
 $f < 1\text{GHz}$ 

Date: 21.NOV.2025 15:41:34

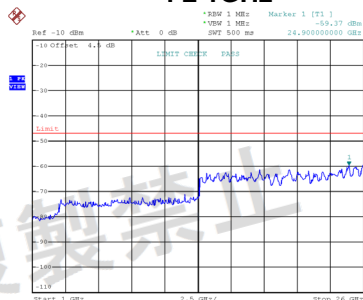 $f \geq 1\text{GHz}$ 

Date: 21.NOV.2025 15:41:44

Test Mode: IEEE 802.11ac(VHT160) - W52+W53


| Test Voltage                                        |     | Normal Voltage | Remarks                                 |
|-----------------------------------------------------|-----|----------------|-----------------------------------------|
| Test Frequency<br>(MHz)                             |     | 5250           | Low/Mid/High of test<br>frequency range |
| Limitation of<br>Collateral Emission<br>of Receiver | MHz | 220.12         | Limit $\leq 4$ nW<br>(-54 dBm)          |
|                                                     | nW  | 0.0156         |                                         |
|                                                     | MHz | 25350.00       | Limit $\leq 20$ nW<br>(-47 dBm)         |
|                                                     | nW  | 1.0351         |                                         |

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$ 

X = the total number of antennas

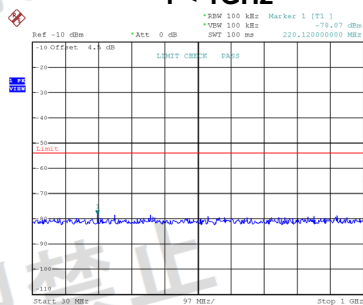CH50  
 $f < 1\text{GHz}$ 

Date: 21.NOV.2025 17:13:44

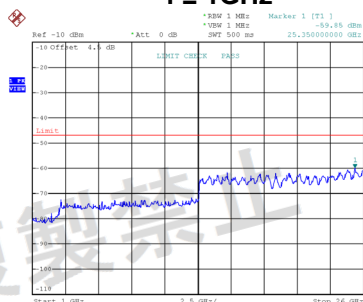 $f \geq 1\text{GHz}$ 

Date: 21.NOV.2025 17:14:06

Test Mode: IEEE 802.11ax(HE160) - W52+W53


| Test Voltage                                        |     | Normal Voltage | Remarks                                 |
|-----------------------------------------------------|-----|----------------|-----------------------------------------|
| Test Frequency<br>(MHz)                             |     | 5250           | Low/Mid/High of test<br>frequency range |
| Limitation of<br>Collateral Emission<br>of Receiver | MHz | 804.06         | Limit $\leq 4$ nW<br>(-54 dBm)          |
|                                                     | nW  | 0.0154         |                                         |
|                                                     | MHz | 24700.00       | Limit $\leq 20$ nW<br>(-47 dBm)         |
|                                                     | nW  | 0.9484         |                                         |

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$ 

X = the total number of antennas

CH50  
 $f < 1\text{GHz}$ 

Date: 21.NOV.2025 17:20:35

 $f \geq 1\text{GHz}$ 

Date: 21.NOV.2025 17:20:44

Test Mode: IEEE 802.11be(EHT160) - W52+W53


| Test Voltage                                        |     | Normal Voltage | Remarks                                 |
|-----------------------------------------------------|-----|----------------|-----------------------------------------|
| Test Frequency<br>(MHz)                             |     | 5250           | Low/Mid/High of test<br>frequency range |
| Limitation of<br>Collateral Emission<br>of Receiver | MHz | 623.64         | Limit $\leq 4$ nW<br>(-54 dBm)          |
|                                                     | nW  | 0.0138         |                                         |
|                                                     | MHz | 24950.00       | Limit $\leq 20$ nW<br>(-47 dBm)         |
|                                                     | nW  | 0.9661         |                                         |

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$ 

X = the total number of antennas

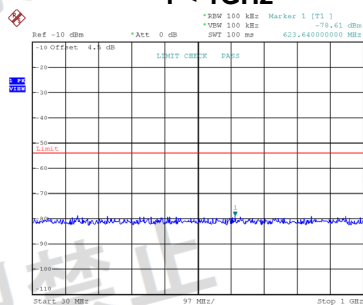CH50  
 $f < 1\text{GHz}$ 

Date: 21.NOV.2025 17:11:35

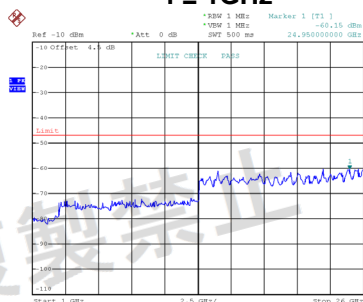 $f \geq 1\text{GHz}$ 

Date: 21.NOV.2025 17:11:44

Test Mode: IEEE 802.11a - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5500           | 5600     | 5720     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 827.34         | 480.08   | 563.50   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0160         | 0.0138   | 0.0140   |                                      |
|                                               | MHz | 24800.00       | 24750.00 | 25350.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.0889         | 1.1749   | 0.9550   |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$


X = the total number of antennas

CH100

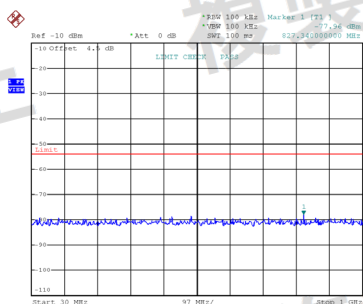


Date: 21.NOV.2025 14:57:32

CH120  
f < 1GHz

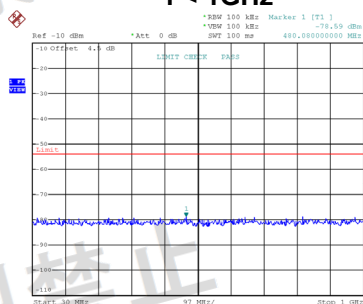


Date: 21.NOV.2025 14:57:54

CH144

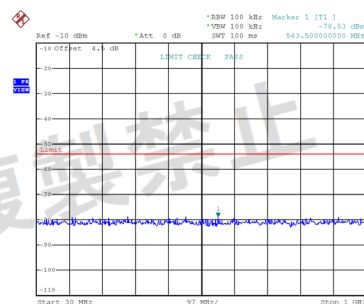


Date: 21.NOV.2025 14:58:15


f ≥ 1GHz

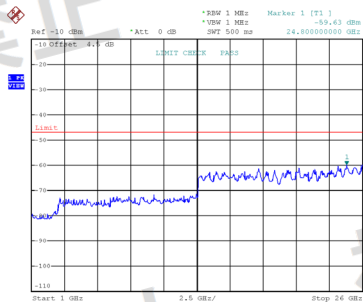

Date: 21.NOV.2025 14:57:42

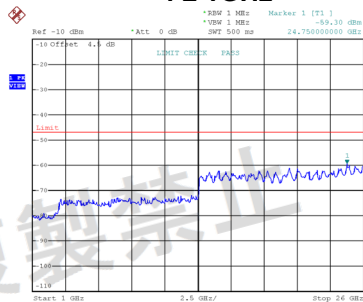

Date: 21.NOV.2025 14:58:04

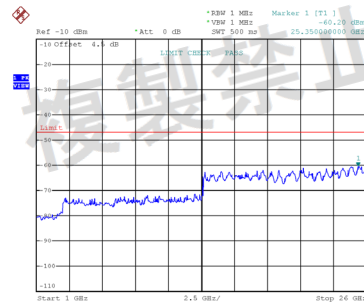

Date: 21.NOV.2025 14:58:25

Test Mode: IEEE 802.11ac(VHT20) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5500           | 5600     | 5720     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 367.56         | 249.22   | 332.64   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0145         | 0.0148   | 0.0135   |                                      |
|                                               | MHz | 25300.00       | 25900.00 | 25950.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.3213         | 1.2106   | 1.2417   |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log(X)$


X = the total number of antennas

CH100

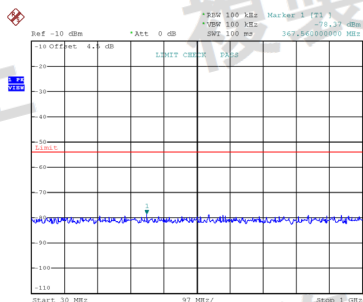


Date: 21.NOV.2025 15:15:28

CH120  
f < 1GHz

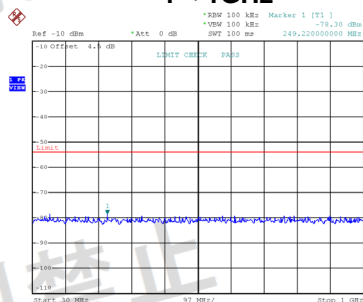


Date: 21.NOV.2025 15:15:50

CH144

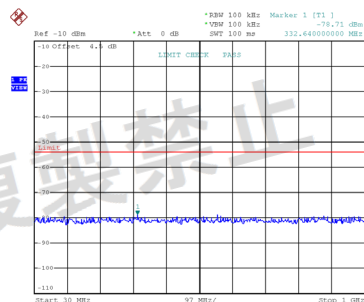


Date: 21.NOV.2025 15:16:11


f ≥ 1GHz

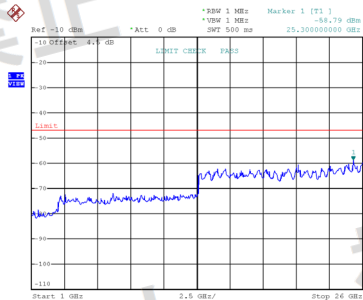

Date: 21.NOV.2025 15:15:28

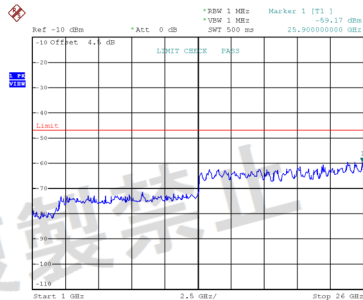

Date: 21.NOV.2025 15:16:00

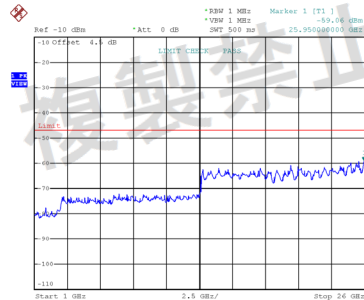

Date: 21.NOV.2025 15:16:21

Test Mode: IEEE 802.11ac(VHT40) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5510           | 5590     | 5710     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 769.14         | 697.36   | 456.80   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0135         | 0.0159   | 0.0134   |                                      |
|                                               | MHz | 25850.00       | 24900.00 | 25450.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.2589         | 1.0691   | 1.0990   |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor =  $10 \log(X)$ 

X = the total number of antennas

CH102

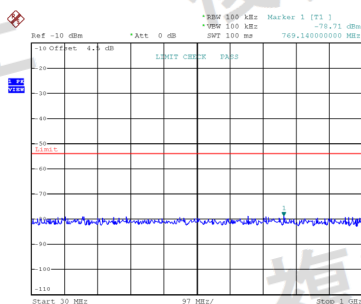


Date: 21.NOV.2025 15:27:01

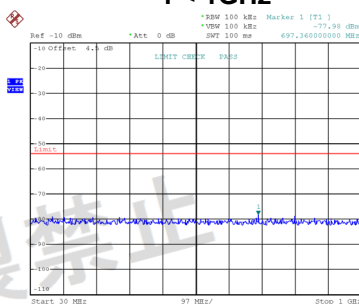CH118  
f < 1GHz


Date: 21.NOV.2025 15:27:22

CH142

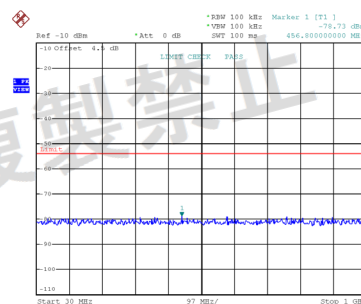


Date: 21.NOV.2025 15:27:44


f ≥ 1GHz

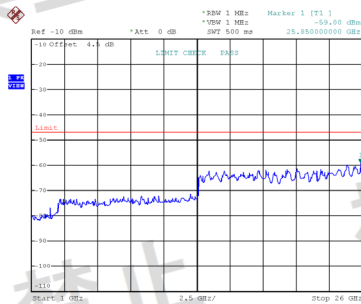

Date: 21.NOV.2025 15:27:11

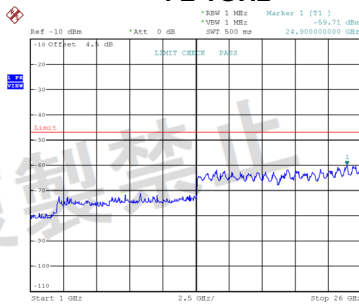

Date: 21.NOV.2025 15:27:32

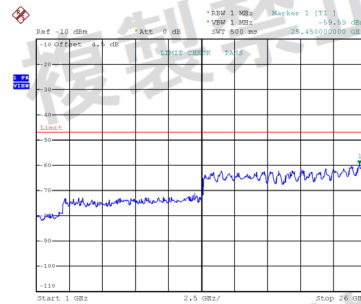

Date: 21.NOV.2025 15:27:54

Test Mode: IEEE 802.11ac(VHT80) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5530           | 5610     | 5690     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 831.22         | 555.74   | 134.76   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0139         | 0.0155   | 0.0168   |                                      |
|                                               | MHz | 25400.00       | 25350.00 | 25400.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.0641         | 1.0093   | 0.9705   |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$


X = the total number of antennas

CH106

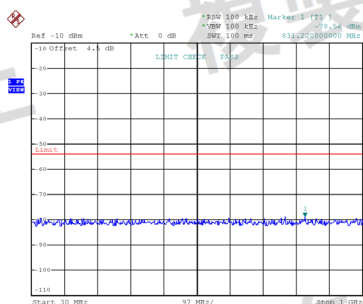


Date: 21.NOV.2025 15:38:02

CH122  
f < 1GHz

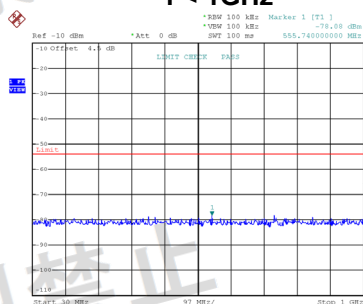


Date: 21.NOV.2025 15:38:25

CH138

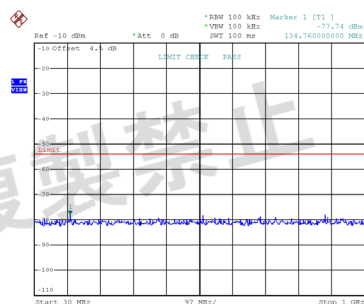


Date: 21.NOV.2025 15:38:49


f ≥ 1GHz

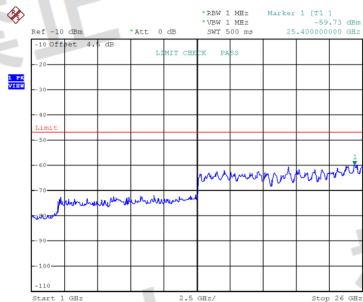

Date: 21.NOV.2025 15:38:12

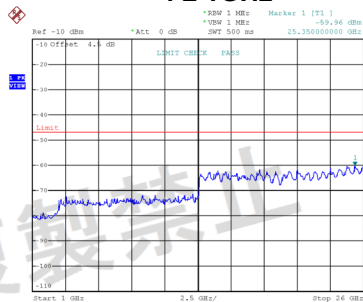

Date: 21.NOV.2025 15:38:35

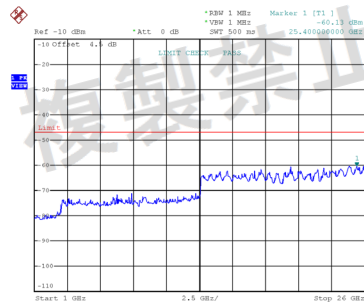

Date: 21.NOV.2025 15:38:59

Test Mode: IEEE 802.11ac(VHT160) - W56

| Test Voltage                                  |     | Normal Voltage | Remarks                              |
|-----------------------------------------------|-----|----------------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5570           | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 856.44         | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0139         |                                      |
|                                               | MHz | 25550.00       | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.0280         |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor =  $10 \log (X)$

X = the total number of antennas

## CH114 f < 1GHz

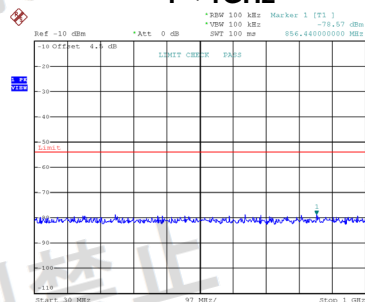

## f ≥ 1GHz

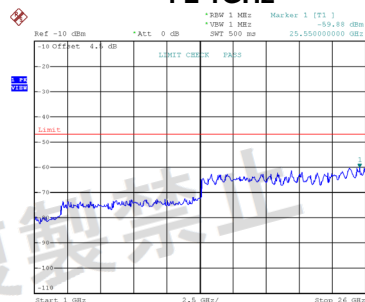

Test Mode: IEEE 802.11ax(HE20) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5500           | 5600     | 5720     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 373.38         | 200.72   | 949.56   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0150         | 0.0147   | 0.0129   |                                      |
|                                               | MHz | 26000.00       | 25900.00 | 24950.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.0568         | 1.0593   | 1.1614   |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log(X)$


X = the total number of antennas

CH100

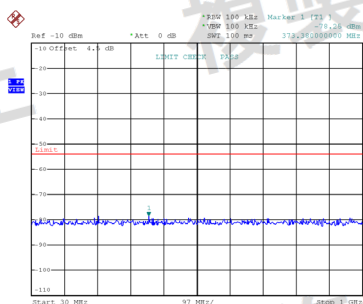


Date: 21.NOV.2025 15:18:45

CH120  
f < 1GHz

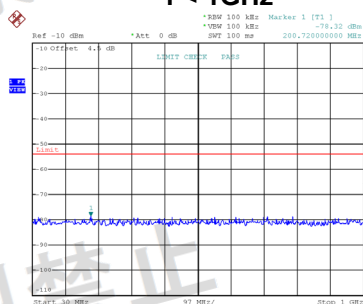


Date: 21.NOV.2025 15:19:06

CH144

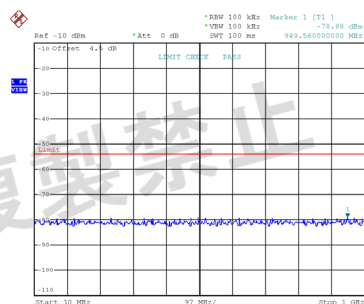


Date: 21.NOV.2025 15:19:35


f ≥ 1GHz

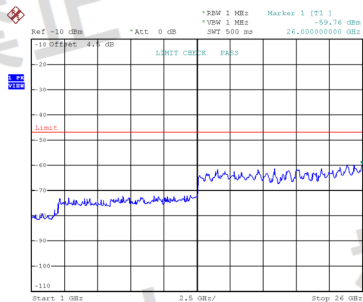

Date: 21.NOV.2025 15:18:55

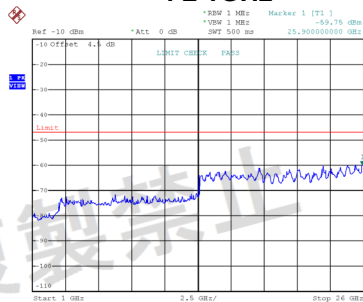

Date: 21.NOV.2025 15:19:16

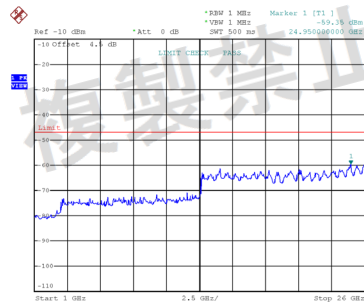

Date: 21.NOV.2025 15:19:44

Test Mode: IEEE 802.11ax(HE40) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5510           | 5590     | 5710     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 986.42         | 951.50   | 404.42   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0142         | 0.0140   | 0.0135   |                                      |
|                                               | MHz | 25450.00       | 25400.00 | 25350.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.1376         | 1.1885   | 0.9954   |                                      |


## Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor =  $10 \log(X)$ 

X = the total number of antennas

CH102

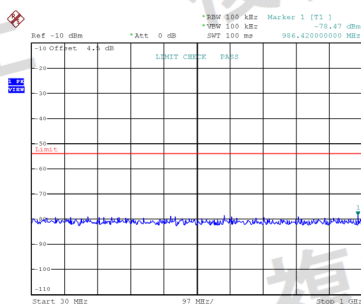


Date: 21.NOV.2025 15:29:54

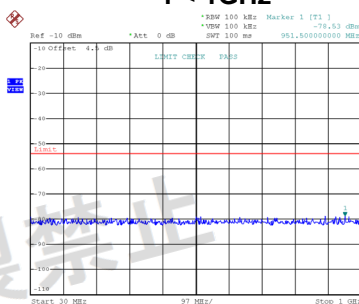CH118  
f < 1GHz


Date: 21.NOV.2025 15:30:21

CH142

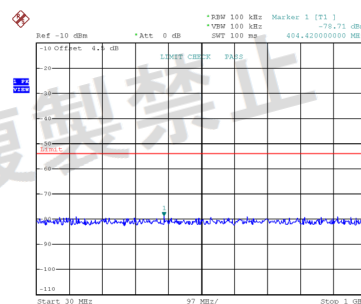


Date: 21.NOV.2025 15:30:42


f ≥ 1GHz

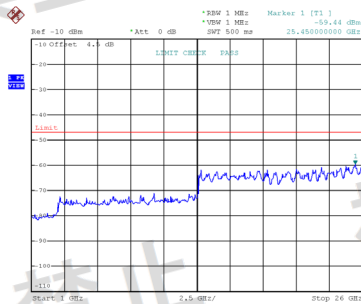

Date: 21.NOV.2025 15:30:03

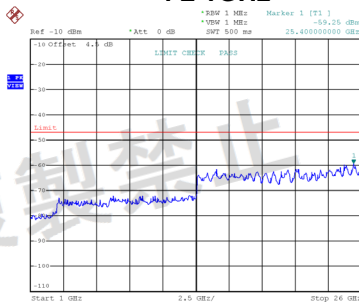

Date: 21.NOV.2025 15:30:31

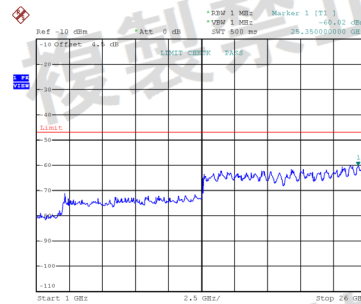

Date: 21.NOV.2025 15:30:52

Test Mode: IEEE 802.11ax(HE80) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5530           | 5610     | 5690     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 703.18         | 183.26   | 369.50   | Limit $\leq 4$ nW<br>(-54 dBm)       |
|                                               | nW  | 0.0138         | 0.0187   | 0.0157   |                                      |
|                                               | MHz | 26000.00       | 25000.00 | 25950.00 | Limit $\leq 20$ nW<br>(-47 dBm)      |
|                                               | nW  | 1.0399         | 1.1967   | 1.1066   |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor =  $10 \log (X)$ 

X = the total number of antennas

CH106

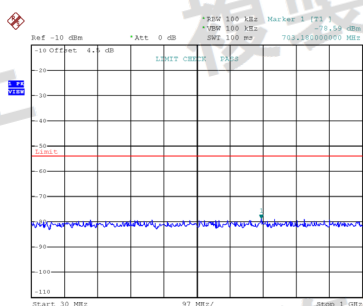


Date: 21.NOV.2025 15:40:02

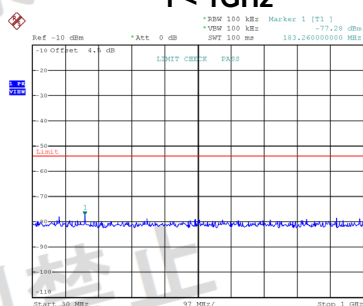CH122  
f < 1GHz


Date: 21.NOV.2025 15:40:23

CH138

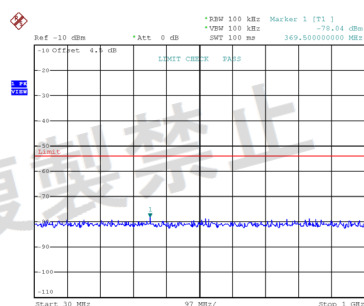


Date: 21.NOV.2025 15:40:43


f ≥ 1GHz

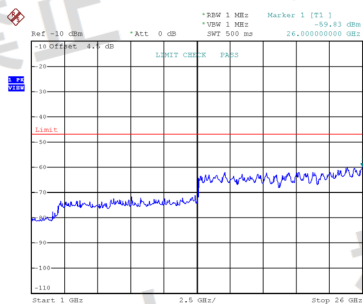

Date: 21.NOV.2025 15:40:12

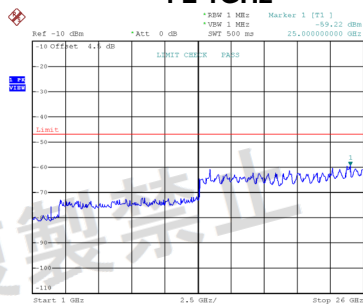

Date: 21.NOV.2025 15:40:32

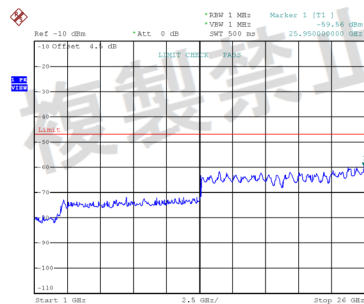

Date: 21.NOV.2025 15:40:53

Test Mode: IEEE 802.11ax(HE160) - W56


| Test Voltage                                  |     | Normal Voltage | Remarks                              |
|-----------------------------------------------|-----|----------------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5570           | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 452.92         | Limit $\leq 4$ nW<br>(-54 dBm)       |
|                                               | nW  | 0.0137         |                                      |
|                                               | MHz | 24900.00       | Limit $\leq 20$ nW<br>(-47 dBm)      |
|                                               | nW  | 1.0257         |                                      |

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$ 

X = the total number of antennas

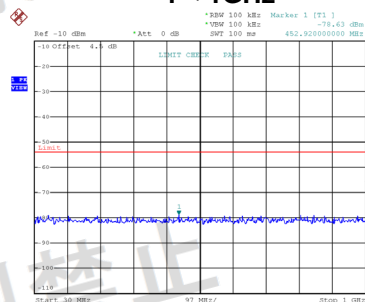CH114  
 $f < 1\text{GHz}$ 

Date: 21.NOV.2025 17:20:55

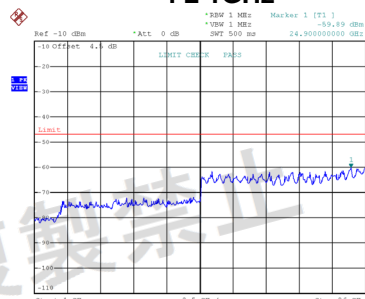 $f \geq 1\text{GHz}$ 

Date: 21.NOV.2025 17:23:21

Test Mode: IEEE 802.11be(EHT20) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5500           | 5600     | 5720     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 427.70         | 107.60   | 309.36   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0122         | 0.0171   | 0.0155   |                                      |
|                                               | MHz | 26000.00       | 24900.00 | 26000.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.2417         | 1.6255   | 0.9638   |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log(X)$


X = the total number of antennas

CH100

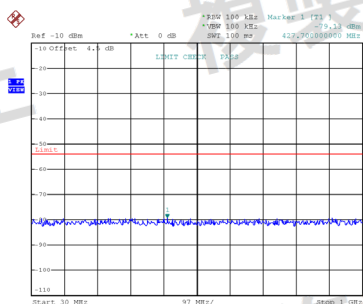


Date: 21.NOV.2025 15:23:05

CH120  
f < 1GHz

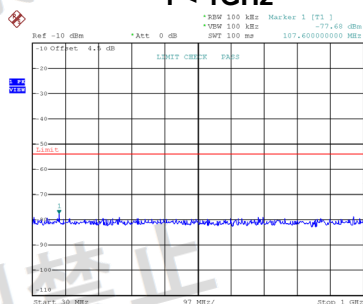


Date: 21.NOV.2025 15:23:26

CH144

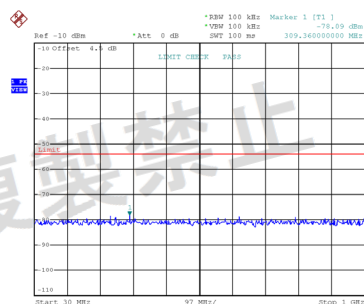


Date: 21.NOV.2025 15:23:50


f ≥ 1GHz

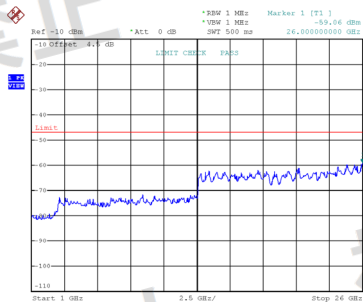

Date: 21.NOV.2025 15:23:15

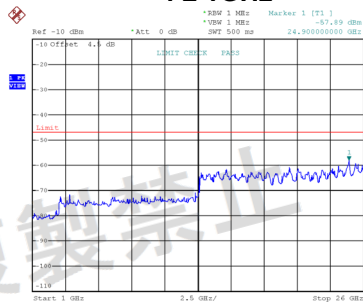

Date: 21.NOV.2025 15:23:36

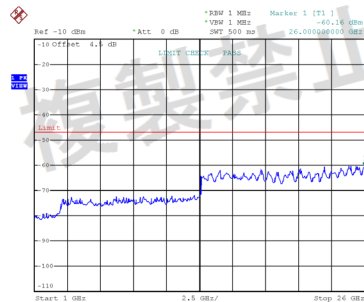

Date: 21.NOV.2025 15:24:00

Test Mode: IEEE 802.11be(EHT40) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5510           | 5590     | 5710     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 532.46         | 871.96   | 813.76   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0153         | 0.0162   | 0.0152   |                                      |
|                                               | MHz | 25400.00       | 24800.00 | 25950.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.1588         | 1.2474   | 1.1350   |                                      |


## Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor =  $10 \log(X)$ 

X = the total number of antennas

CH102

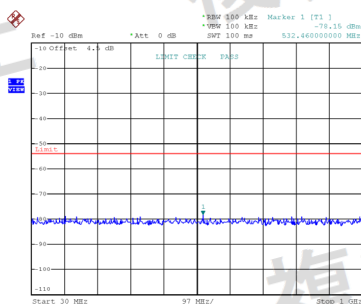


Date: 21.NOV.2025 15:32:50

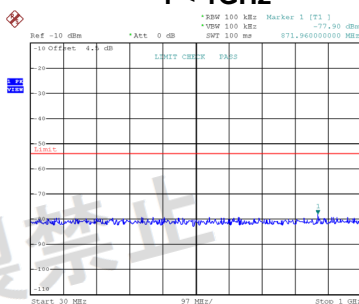CH118  
f < 1GHz


Date: 21.NOV.2025 15:33:11

CH142

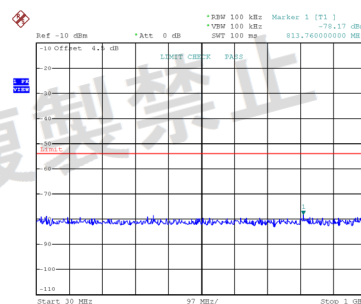


Date: 21.NOV.2025 15:33:32


f ≥ 1GHz

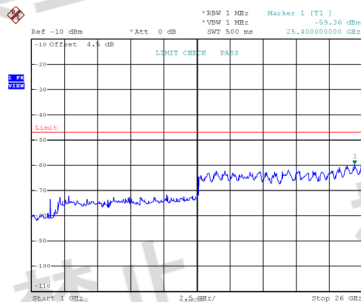

Date: 21.NOV.2025 15:32:59

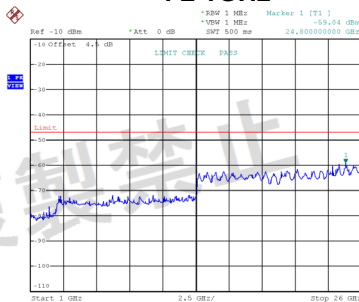

Date: 21.NOV.2025 15:33:20

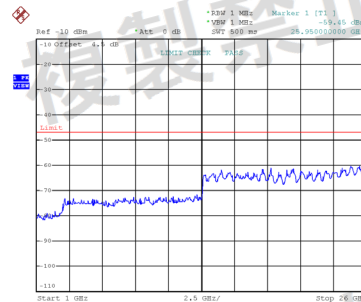

Date: 21.NOV.2025 15:33:42

Test Mode: IEEE 802.11be(EHT80) - W56

| Test Voltage                                  |     | Normal Voltage |          |          | Remarks                              |
|-----------------------------------------------|-----|----------------|----------|----------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5530           | 5610     | 5690     | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 743.92         | 621.70   | 968.96   | Limit $\leq 4$ nW (-54 dBm)          |
|                                               | nW  | 0.0158         | 0.0152   | 0.0131   |                                      |
|                                               | MHz | 26000.00       | 25350.00 | 25400.00 | Limit $\leq 20$ nW (-47 dBm)         |
|                                               | nW  | 1.3032         | 1.1143   | 1.2445   |                                      |


Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor =  $10 \log (X)$ 

X = the total number of antennas

CH106

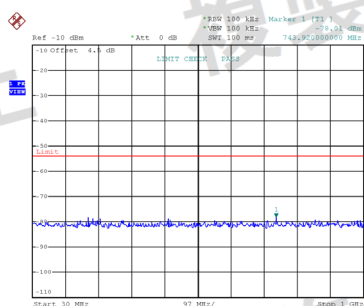


Date: 21.NOV.2025 15:41:56

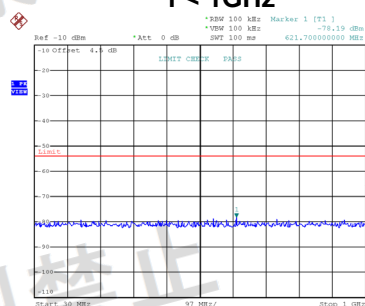CH122  
f < 1GHz


Date: 21.NOV.2025 15:42:17

CH138

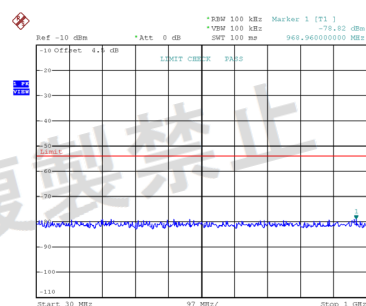


Date: 21.NOV.2025 15:42:40


f ≥ 1GHz

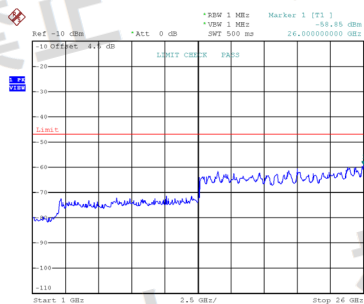

Date: 21.NOV.2025 15:42:06

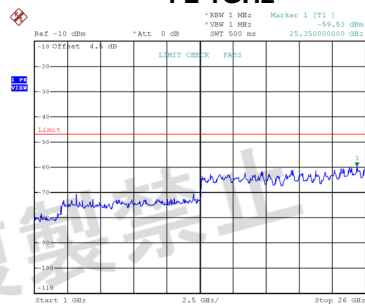

Date: 21.NOV.2025 15:42:27

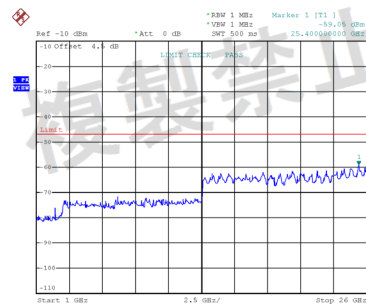

Date: 21.NOV.2025 15:42:50

Test Mode: IEEE 802.11be(EHT160) - W56


| Test Voltage                                  |     | Normal Voltage | Remarks                              |
|-----------------------------------------------|-----|----------------|--------------------------------------|
| Test Frequency (MHz)                          |     | 5570           | Low/Mid/High of test frequency range |
| Limitation of Collateral Emission of Receiver | MHz | 806.00         | Limit $\leq 4$ nW<br>(-54 dBm)       |
|                                               | nW  | 0.0149         |                                      |
|                                               | MHz | 26000.00       | Limit $\leq 20$ nW<br>(-47 dBm)      |
|                                               | nW  | 1.1402         |                                      |

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor =  $10 \log (X)$ 

X = the total number of antennas

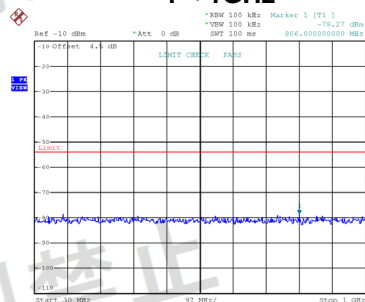CH114  
 $f < 1\text{GHz}$ 

Date: 21.NOV.2025 17:11:54

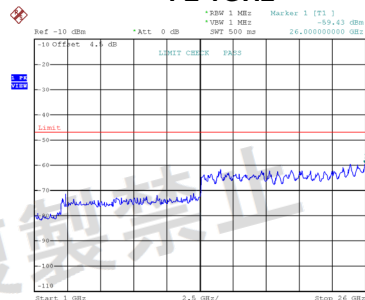 $f \geq 1\text{GHz}$ 

Date: 21.NOV.2025 17:12:51

**APPENDIX G - TRANSMISSION BURST LENGTH**

|            |                    |
|------------|--------------------|
| Test Mode: | IEEE 802.11a - W52 |
|------------|--------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5180           | 5200 | 5240 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 5.38           | 5.38 | 5.38 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT20) - W52 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5180           | 5200 | 5240 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 4.98           | 4.98 | 4.98 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT40) - W52 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      | Remarks                              |
|---------------------------|------|----------------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5190           | 5230 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.42           | 2.42 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT80) - W52 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |  | Remarks                              |
|---------------------------|------|----------------|--|--------------------------------------|
| Test Frequency (MHz)      |      | 5210           |  | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.23           |  | Limit ≤ 8msec                        |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE20) - W52 |
|------------|---------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5180           | 5200 | 5240 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 4.47           | 4.47 | 4.47 | Limit ≤ 8msec                        |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE40) - W52 |
|------------|---------------------------|

| Test Voltage              |      | Normal Voltage |      | Remarks                              |
|---------------------------|------|----------------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5190           | 5230 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.41           | 2.41 | Limit ≤ 8msec                        |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE80) - W52 |
|------------|---------------------------|

| Test Voltage              |      | Normal Voltage |  | Remarks                              |
|---------------------------|------|----------------|--|--------------------------------------|
| Test Frequency (MHz)      |      | 5210           |  | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.24           |  | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT20) - W52 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5180           | 5200 | 5240 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 4.47           | 4.47 | 4.47 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT40) - W52 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      | Remarks                              |
|---------------------------|------|----------------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5190           | 5230 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.28           | 2.28 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT80) - W52 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |  | Remarks                              |
|---------------------------|------|----------------|--|--------------------------------------|
| Test Frequency (MHz)      |      | 5210           |  | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.18           |  | Limit ≤ 8msec                        |

|            |                    |
|------------|--------------------|
| Test Mode: | IEEE 802.11a - W53 |
|------------|--------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5260           | 5300 | 5320 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 5.38           | 5.38 | 5.38 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT20) - W53 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5260           | 5300 | 5320 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 4.98           | 4.98 | 4.98 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT40) - W53 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      | Remarks                              |
|---------------------------|------|----------------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5270           | 5310 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.42           | 2.42 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT80) - W53 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |  | Remarks                              |
|---------------------------|------|----------------|--|--------------------------------------|
| Test Frequency (MHz)      |      | 5290           |  | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.23           |  | Limit ≤ 8msec                        |

Test Mode: IEEE 802.11ax(HE20) - W53

| Test Voltage                 |      | Normal Voltage |      |      | Remarks                                 |
|------------------------------|------|----------------|------|------|-----------------------------------------|
| Test Frequency<br>(MHz)      |      | 5260           | 5300 | 5320 | Low/Mid/High of test<br>frequency range |
| Transmission Burst<br>Length | msec | 4.47           | 4.47 | 4.47 | Limit ≤ 8msec                           |

Test Mode: IEEE 802.11ax(HE40) - W53

| Test Voltage                 |      | Normal Voltage |      | Remarks                                 |
|------------------------------|------|----------------|------|-----------------------------------------|
| Test Frequency<br>(MHz)      |      | 5270           | 5310 | Low/Mid/High of test<br>frequency range |
| Transmission Burst<br>Length | msec | 2.41           | 2.41 | Limit ≤ 8msec                           |

Test Mode: IEEE 802.11ax(HE80) - W53

| Test Voltage                 |      | Normal Voltage |  | Remarks                                 |
|------------------------------|------|----------------|--|-----------------------------------------|
| Test Frequency<br>(MHz)      |      | 5290           |  | Low/Mid/High of test<br>frequency range |
| Transmission Burst<br>Length | msec | 2.24           |  | Limit ≤ 8msec                           |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT20) - W53 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5260           | 5300 | 5320 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 4.47           | 4.47 | 4.47 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT40) - W53 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      | Remarks                              |
|---------------------------|------|----------------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5270           | 5310 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.28           | 2.28 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT80) - W53 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |  | Remarks                              |
|---------------------------|------|----------------|--|--------------------------------------|
| Test Frequency (MHz)      |      | 5290           |  | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.18           |  | Limit ≤ 8msec                        |

|            |                                 |
|------------|---------------------------------|
| Test Mode: | IEEE 802.11ac(VHT160) - W52+W53 |
|------------|---------------------------------|

| Test Voltage              |      | Normal Voltage | Remarks                              |
|---------------------------|------|----------------|--------------------------------------|
| Test Frequency (MHz)      |      | 5250           | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 1.42           | Limit ≤ 8msec                        |

|            |                                |
|------------|--------------------------------|
| Test Mode: | IEEE 802.11ax(HE160) - W52+W53 |
|------------|--------------------------------|

| Test Voltage              |      | Normal Voltage | Remarks                              |
|---------------------------|------|----------------|--------------------------------------|
| Test Frequency (MHz)      |      | 5250           | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 1.39           | Limit ≤ 8msec                        |

|            |                                 |
|------------|---------------------------------|
| Test Mode: | IEEE 802.11be(EHT160) - W52+W53 |
|------------|---------------------------------|

| Test Voltage              |      | Normal Voltage | Remarks                              |
|---------------------------|------|----------------|--------------------------------------|
| Test Frequency (MHz)      |      | 5250           | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 1.40           | Limit ≤ 8msec                        |

|            |                    |
|------------|--------------------|
| Test Mode: | IEEE 802.11a - W56 |
|------------|--------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5500           | 5600 | 5720 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 5.38           | 5.38 | 5.38 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT20) - W56 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5500           | 5600 | 5720 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 4.98           | 4.98 | 4.98 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT40) - W56 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5510           | 5590 | 5710 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.42           | 2.42 | 2.42 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT80) - W56 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5530           | 5610 | 5690 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.23           | 2.23 | 2.23 | Limit ≤ 8msec                        |

|            |                             |
|------------|-----------------------------|
| Test Mode: | IEEE 802.11ac(VHT160) - W56 |
|------------|-----------------------------|

| Test Voltage              |      | Normal Voltage |  | Remarks                              |
|---------------------------|------|----------------|--|--------------------------------------|
| Test Frequency (MHz)      |      | 5570           |  | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 1.42           |  | Limit ≤ 8msec                        |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE20) - W56 |
|------------|---------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5500           | 5600 | 5720 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 4.47           | 4.47 | 4.47 | Limit ≤ 8msec                        |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE40) - W56 |
|------------|---------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5510           | 5590 | 5710 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.41           | 2.41 | 2.41 | Limit ≤ 8msec                        |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE80) - W56 |
|------------|---------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5530           | 5610 | 5690 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.24           | 2.24 | 2.24 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ax(HE160) - W56 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |  | Remarks                              |
|---------------------------|------|----------------|--|--------------------------------------|
| Test Frequency (MHz)      |      | 5570           |  | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 1.39           |  | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT20) - W56 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5500           | 5600 | 5720 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 4.47           | 4.47 | 4.47 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT40) - W56 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5510           | 5590 | 5710 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.28           | 2.28 | 2.28 | Limit ≤ 8msec                        |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT80) - W56 |
|------------|----------------------------|

| Test Voltage              |      | Normal Voltage |      |      | Remarks                              |
|---------------------------|------|----------------|------|------|--------------------------------------|
| Test Frequency (MHz)      |      | 5530           | 5610 | 5690 | Low/Mid/High of test frequency range |
| Transmission Burst Length | msec | 2.18           | 2.18 | 2.18 | Limit ≤ 8msec                        |

|            |                             |
|------------|-----------------------------|
| Test Mode: | IEEE 802.11be(EHT160) - W56 |
|------------|-----------------------------|

| Test Voltage                 |      | Normal Voltage | Remarks                                 |
|------------------------------|------|----------------|-----------------------------------------|
| Test Frequency<br>(MHz)      |      | 5570           | Low/Mid/High of test<br>frequency range |
| Transmission Burst<br>Length | msec | 1.40           | Limit ≤ 8msec                           |

**APPENDIX H - CARRIER SENSE CAPABILITY**

|            |                    |
|------------|--------------------|
| Test Mode: | IEEE 802.11a - W52 |
|------------|--------------------|

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5180           | 5200 | 5240 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT20) - W52 |
|------------|----------------------------|

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5180           | 5200 | 5240 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT40) - W52 |
|------------|----------------------------|

| Test Voltage            |         | Normal Voltage |      | Remarks                                             |
|-------------------------|---------|----------------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5190           | 5230 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT80) - W52 |
|------------|----------------------------|

| Test Voltage            |         | Normal Voltage |  | Remarks                                             |
|-------------------------|---------|----------------|--|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5210           |  | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             |  | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ax(HE20) - W52

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5180           | 5200 | 5240 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ax(HE40) - W52

| Test Voltage            |         | Normal Voltage |      | Remarks                                             |
|-------------------------|---------|----------------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5190           | 5230 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ax(HE80) - W52

| Test Voltage            |         | Normal Voltage |  | Remarks                                             |
|-------------------------|---------|----------------|--|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5210           |  | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             |  | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11be(EHT20) - W52

| Test Voltage               |         | Normal Voltage |      |      | Remarks                                             |
|----------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency<br>(MHz)    |         | 5180           | 5200 | 5240 | Low/Mid/High of test level                          |
| Carrier Sense<br>(100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11be(EHT40) - W52

| Test Voltage               |         | Normal Voltage |      | Remarks                                             |
|----------------------------|---------|----------------|------|-----------------------------------------------------|
| Test Frequency<br>(MHz)    |         | 5190           | 5230 | Low/Mid/High of test level                          |
| Carrier Sense<br>(100mV/m) | OK / NG | OK             | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11be(EHT80) - W52

| Test Voltage               |         | Normal Voltage |  | Remarks                                             |
|----------------------------|---------|----------------|--|-----------------------------------------------------|
| Test Frequency<br>(MHz)    |         | 5210           |  | Low/Mid/High of test level                          |
| Carrier Sense<br>(100mV/m) | OK / NG | OK             |  | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                    |
|------------|--------------------|
| Test Mode: | IEEE 802.11a - W53 |
|------------|--------------------|

| Test Voltage               |         | Normal Voltage |      |      | Remarks                                             |
|----------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency<br>(MHz)    |         | 5260           | 5300 | 5320 | Low/Mid/High of test level                          |
| Carrier Sense<br>(100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT20) - W53 |
|------------|----------------------------|

| Test Voltage               |         | Normal Voltage |      |      | Remarks                                             |
|----------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency<br>(MHz)    |         | 5260           | 5300 | 5320 | Low/Mid/High of test level                          |
| Carrier Sense<br>(100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT40) - W53 |
|------------|----------------------------|

| Test Voltage               |         | Normal Voltage |      | Remarks                                             |
|----------------------------|---------|----------------|------|-----------------------------------------------------|
| Test Frequency<br>(MHz)    |         | 5270           | 5310 | Low/Mid/High of test level                          |
| Carrier Sense<br>(100mV/m) | OK / NG | OK             | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ac(VHT80) - W53 |
|------------|----------------------------|

| Test Voltage               |         | Normal Voltage |  | Remarks                                             |
|----------------------------|---------|----------------|--|-----------------------------------------------------|
| Test Frequency<br>(MHz)    |         | 5290           |  | Low/Mid/High of test level                          |
| Carrier Sense<br>(100mV/m) | OK / NG | OK             |  | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ax(HE20) - W53

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5260           | 5300 | 5320 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ax(HE40) - W53

| Test Voltage            |         | Normal Voltage |      | Remarks                                             |
|-------------------------|---------|----------------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5270           | 5310 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ax(HE80) - W53

| Test Voltage            |         | Normal Voltage |  | Remarks                                             |
|-------------------------|---------|----------------|--|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5290           |  | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             |  | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11be(EHT20) - W53

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5260           | 5300 | 5320 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11be(EHT40) - W53

| Test Voltage            |         | Normal Voltage |      | Remarks                                             |
|-------------------------|---------|----------------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5270           | 5310 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11be(EHT80) - W53

| Test Voltage            |         | Normal Voltage |  | Remarks                                             |
|-------------------------|---------|----------------|--|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5290           |  | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             |  | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                                 |
|------------|---------------------------------|
| Test Mode: | IEEE 802.11ac(VHT160) - W52+W53 |
|------------|---------------------------------|

| Test Voltage            |         | Normal Voltage | Remarks                                                                  |
|-------------------------|---------|----------------|--------------------------------------------------------------------------|
| Test Frequency (MHz)    |         | 5250           | Low/Mid/High of test level                                               |
| Carrier Sense (100mV/m) | OK / NG | OK             | Power level =<br>$22.79 + Gr - 20 \cdot \log(\text{freq\_MHz})$<br>[dBm] |

|            |                                |
|------------|--------------------------------|
| Test Mode: | IEEE 802.11ax(HE160) - W52+W53 |
|------------|--------------------------------|

| Test Voltage            |         | Normal Voltage | Remarks                                                                  |
|-------------------------|---------|----------------|--------------------------------------------------------------------------|
| Test Frequency (MHz)    |         | 5250           | Low/Mid/High of test level                                               |
| Carrier Sense (100mV/m) | OK / NG | OK             | Power level =<br>$22.79 + Gr - 20 \cdot \log(\text{freq\_MHz})$<br>[dBm] |

|            |                                 |
|------------|---------------------------------|
| Test Mode: | IEEE 802.11be(EHT160) - W52+W53 |
|------------|---------------------------------|

| Test Voltage            |         | Normal Voltage | Remarks                                                                  |
|-------------------------|---------|----------------|--------------------------------------------------------------------------|
| Test Frequency (MHz)    |         | 5250           | Low/Mid/High of test level                                               |
| Carrier Sense (100mV/m) | OK / NG | OK             | Power level =<br>$22.79 + Gr - 20 \cdot \log(\text{freq\_MHz})$<br>[dBm] |

Test Mode: IEEE 802.11a - W56

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5500           | 5600 | 5720 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ac(VHT20) - W56

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5500           | 5600 | 5720 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ac(VHT40) - W56

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5510           | 5590 | 5710 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

Test Mode: IEEE 802.11ac(VHT80) - W56

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5530           | 5610 | 5690 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                             |
|------------|-----------------------------|
| Test Mode: | IEEE 802.11ac(VHT160) - W56 |
|------------|-----------------------------|

| Test Voltage            |         | Normal Voltage |  | Remarks                                             |
|-------------------------|---------|----------------|--|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5570           |  | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             |  | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE20) - W56 |
|------------|---------------------------|

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5500           | 5600 | 5720 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE40) - W56 |
|------------|---------------------------|

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5510           | 5590 | 5710 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                           |
|------------|---------------------------|
| Test Mode: | IEEE 802.11ax(HE80) - W56 |
|------------|---------------------------|

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5530           | 5610 | 5690 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11ax(HE160) - W56 |
|------------|----------------------------|

| Test Voltage            |         | Normal Voltage |  | Remarks                                             |
|-------------------------|---------|----------------|--|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5570           |  | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             |  | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT20) - W56 |
|------------|----------------------------|

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5500           | 5600 | 5720 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT40) - W56 |
|------------|----------------------------|

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5510           | 5590 | 5710 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                            |
|------------|----------------------------|
| Test Mode: | IEEE 802.11be(EHT80) - W56 |
|------------|----------------------------|

| Test Voltage            |         | Normal Voltage |      |      | Remarks                                             |
|-------------------------|---------|----------------|------|------|-----------------------------------------------------|
| Test Frequency (MHz)    |         | 5530           | 5610 | 5690 | Low/Mid/High of test level                          |
| Carrier Sense (100mV/m) | OK / NG | OK             | OK   | OK   | Power level =<br>22.79+Gr-20*log(freq_MHz)<br>[dBm] |

|            |                             |
|------------|-----------------------------|
| Test Mode: | IEEE 802.11be(EHT160) - W56 |
|------------|-----------------------------|

| Test Voltage               |         | Normal Voltage | Remarks                                                                  |
|----------------------------|---------|----------------|--------------------------------------------------------------------------|
| Test Frequency<br>(MHz)    |         | 5570           | Low/Mid/High of test level                                               |
| Carrier Sense<br>(100mV/m) | OK / NG | OK             | Power level =<br>$22.79 + Gr - 20 \cdot \log(\text{freq\_MHz})$<br>[dBm] |

End of Test Report