

附錄一

受測裝置之測試結果

目錄	頁次
1. 場強輻射之量測.....	2
1.1. 30-1000MHz 頻率範圍，其他不必要發射量測	3
1.2. 1000MHz 以上頻率範圍，其他不必要發射量測	4
1.3. 禁用頻帶量測結果 (其他不必要發射).....	8
2. 最大輸出功率及 26dB/6dB 頻寬之量測.....	14
2.1. 最大輸出功率及 26dB/6dB 頻寬	14
2.2. 26dB/6dB 頻寬之量測圖	15
3. 峰值功率頻譜密度之量測.....	18
3.1. 峰值功率頻譜密度.....	18
3.2. 峰值功率頻譜密度之量測圖.....	19
4. 頻帶邊緣之 RF 輻射發射之量測	22

1. 場強輻射之量測

本裝置有兩種電源供應模式分別為(1)電池(DC 3.7V)、(2)DC 7.5V, 1.7A (Accu-Chek Inform II Base Unit 充電)，實驗室以單機(電池供電)以三種不同的擺設方式(站立、平放、側立)及電源供應器(Accu-Chek Inform II Base Unit 充電)供電進行量試評估，**最後選取最大場強值的擺設方式單機(平放，電池供電)供電以低、中、高頻率來進行量測，並將下列測試模式測試數據隨案件所附。**；最後，選擇較差模式進行讀值之測量，所得讀值資料請見章節 1.1 ~ 1.2：

支援 IEEE 802.11a/n，依測試要求評估低、中、高頻率，並檢附三頻率之最差模式於此測試報告中。

模式	供應電源	動作狀態	基本頻率		量測頻率範圍
802.11a	DC 3.7V (經電池供電)	發射	U-NII Band I	5200MHz*	30-1000MHz 1000-40000MHz
			U-NII Band IV	5745MHz	1000-40000MHz
802.11n-HT20			U-NII Band I	5240MHz	1000-40000MHz
			U-NII Band IV	5745MHz	1000-40000MHz
802.11n-HT40			U-NII Band I	5230MHz	1000-40000MHz
			U-NII Band IV	5755MHz	1000-40000MHz
---		接收	U-NII Band I	5240MHz	30-1000MHz 1000-40000MHz

註:*: 經評估後，以最差頻率進行 30-1000MHz 量測。

對受測物裝置落於低功率射頻器材技術規範第 3.5 章節的禁用頻帶之混附發射以下列測試模式依規定分別進行量測，所得量測資料請見章節 1.3。

模式	供應電源	動作狀態	基本頻率		量測頻率範圍
802.11b	DC 3.7V (經電池供電)	發射	U-NII Band I	5180MHz	5100-5200MHz
802.11n-HT20			U-NII Band I	5180MHz	5100-5200MHz
802.11n-HT40			U-NII Band I	5190MHz	5100-5210MHz

測試日期	2021/05/03~04	環境溫/濕度	24~26°C/64~70%
測試電壓	DC 3.7V (經電池供電)	測試人員	Sean Wang

1.1. 30-1000MHz 頻率範圍，其他不必要發射量測

Mode	802.11a	U-NII Band	I
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	18.03	1.26	28.14	34.24	25.39	40.00	14.61	Peak
216.240	10.36	3.70	27.65	41.80	28.21	46.00	17.79	Peak
265.710	12.46	4.19	27.60	41.67	30.72	46.00	15.28	Peak
647.890	18.63	7.31	29.37	38.17	34.74	46.00	11.26	Peak
949.560	20.85	8.94	28.71	35.20	36.28	46.00	9.72	Peak
996.120	21.29	9.14	28.59	34.75	36.59	54.00	17.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	16.29	1.35	28.13	42.67	32.18	40.00	7.82	Peak
114.390	11.77	2.61	27.98	40.59	26.99	43.50	16.51	Peak
527.610	17.62	6.96	29.27	40.45	35.76	46.00	10.24	Peak
647.890	18.63	7.31	29.37	38.73	35.30	46.00	10.70	Peak
931.130	20.70	8.86	28.76	38.32	39.12	46.00	6.88	Peak
977.690	21.13	9.06	28.64	35.17	36.72	54.00	17.28	Peak

Mode	---	U-NII Band	I
		Frequency	RX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	18.65	1.23	28.14	33.63	25.37	40.00	14.63	Peak
122.150	11.84	2.71	27.94	37.35	23.96	43.50	19.54	Peak
265.710	12.46	4.19	27.60	42.09	31.14	46.00	14.86	Peak
540.220	17.75	6.97	29.29	38.90	34.33	46.00	11.67	Peak
944.710	20.82	8.92	28.74	35.21	36.21	46.00	9.79	Peak
993.210	21.26	9.13	28.59	34.34	36.14	54.00	17.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	16.29	1.35	28.13	43.07	32.58	40.00	7.42	Peak
114.390	11.77	2.61	27.98	40.79	27.19	43.50	16.31	Peak
480.080	16.95	6.75	29.08	40.31	34.93	46.00	11.07	Peak
647.890	18.63	7.31	29.37	38.82	35.39	46.00	10.61	Peak
931.130	20.70	8.86	28.76	38.57	39.37	46.00	6.63	Peak
987.390	21.20	9.10	28.61	34.55	36.24	54.00	17.76	Peak

1.2. 1000MHz 以上頻率範圍，其他不必要發射量測

頻率範圍量測至 40GHz，其他未列在報告上乃因訊號太小無法量測。

Mode	802.11a	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	14.90	34.78	33.09	50.81	54.00	3.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	14.90	34.78	33.20	50.92	54.00	3.08	Peak

Mode	802.11a	U-NII Band	IV
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.65	34.59	29.86	49.32	54.00	4.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.65	34.59	30.12	49.58	54.00	4.42	Peak

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.57	48.55	54.00	5.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	31.35	49.33	54.00	4.67	Peak

Mode	802.11n-HT20	U-NII Band	IV
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.65	34.59	30.91	50.37	54.00	3.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.65	34.59	30.00	49.46	54.00	4.54	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.81	48.71	54.00	5.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.50	48.40	54.00	5.60	Peak

Mode	802.11n-HT40	U-NII Band	IV
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.65	34.59	29.84	49.30	54.00	4.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.40	15.65	34.59	29.58	49.04	54.00	4.96	Peak

Mode	---	U-NII Band	I
		Frequency	RX 5240MHz

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
9070.000	36.30	13.88	35.04	32.22	47.36	54.00	6.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
9540.000	36.75	14.32	35.19	31.79	47.67	54.00	6.33	Peak


1.3. 禁用頻帶量測結果 (其他不必要發射)

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

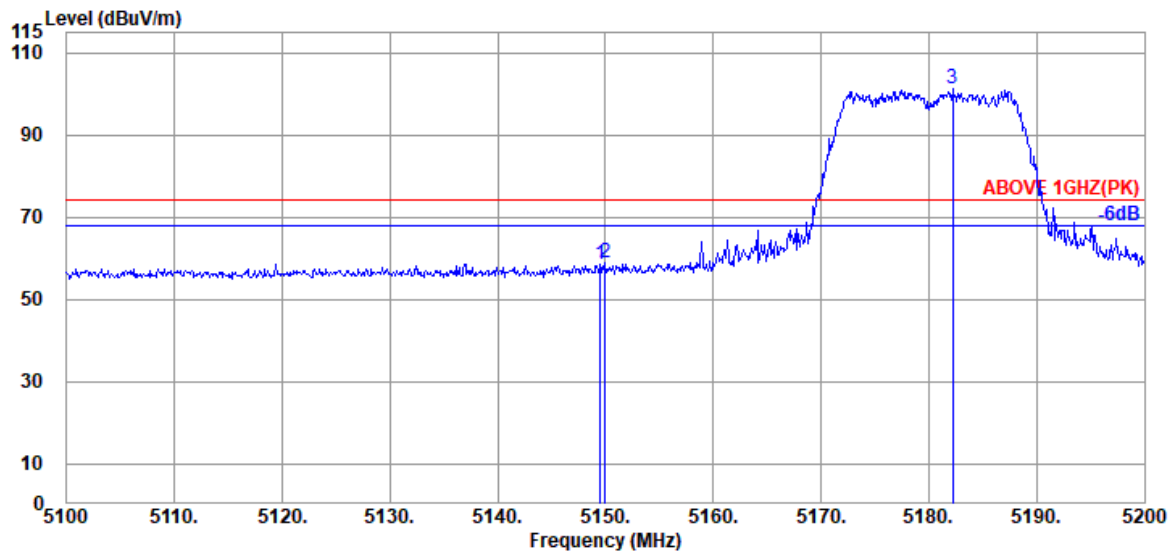

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	10.70	34.35	47.98	58.53	74.00	15.47	Peak
5150.000	34.20	10.70	34.35	48.19	58.74	74.00	15.26	Peak
@ 5182.200	34.20	10.72	34.34	90.56	101.14	---	---	Peak

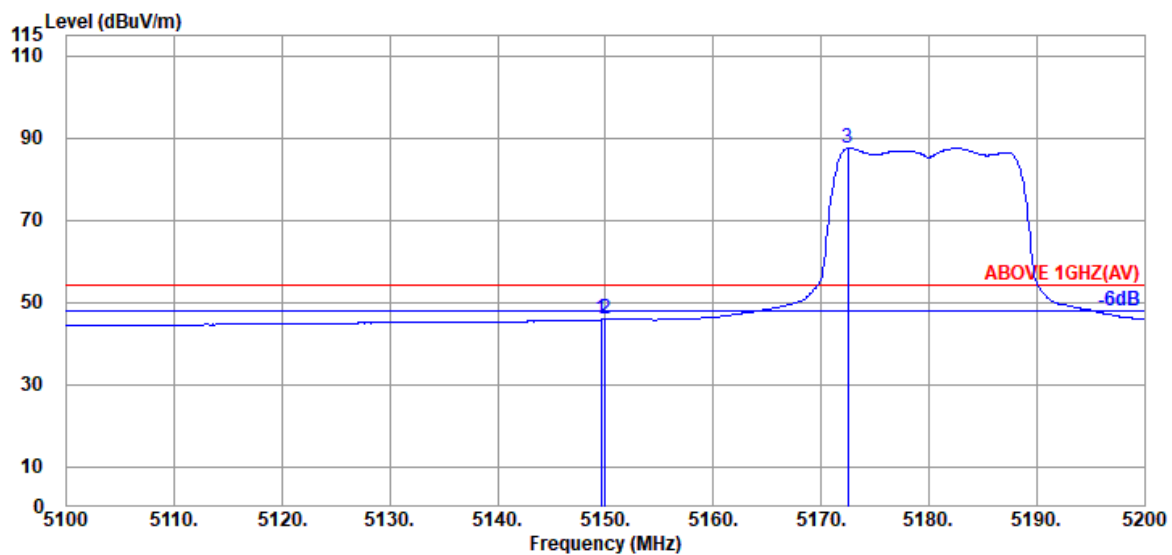


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	10.70	34.35	35.20	45.75	54.00	8.25	Average
5150.000	34.20	10.70	34.35	35.24	45.79	54.00	8.21	Average
@ 5172.500	34.20	10.72	34.34	76.97	87.55	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

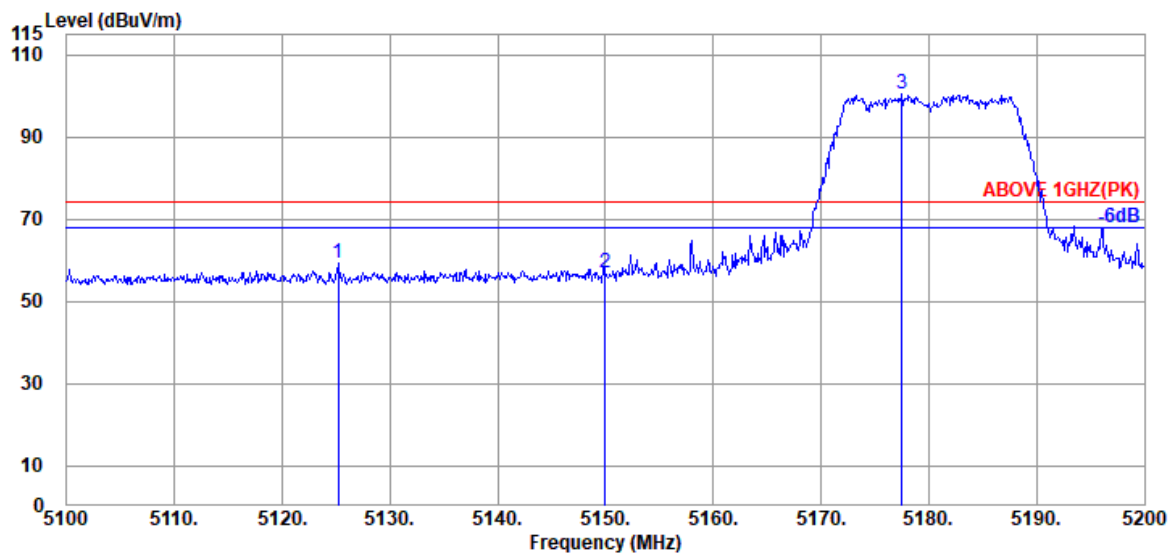

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.200	34.13	10.70	34.36	48.64	59.11	74.00	14.89	Peak
5150.000	34.20	10.70	34.35	46.53	57.08	74.00	16.92	Peak
@ 5177.500	34.20	10.72	34.34	89.91	100.49	---	---	Peak

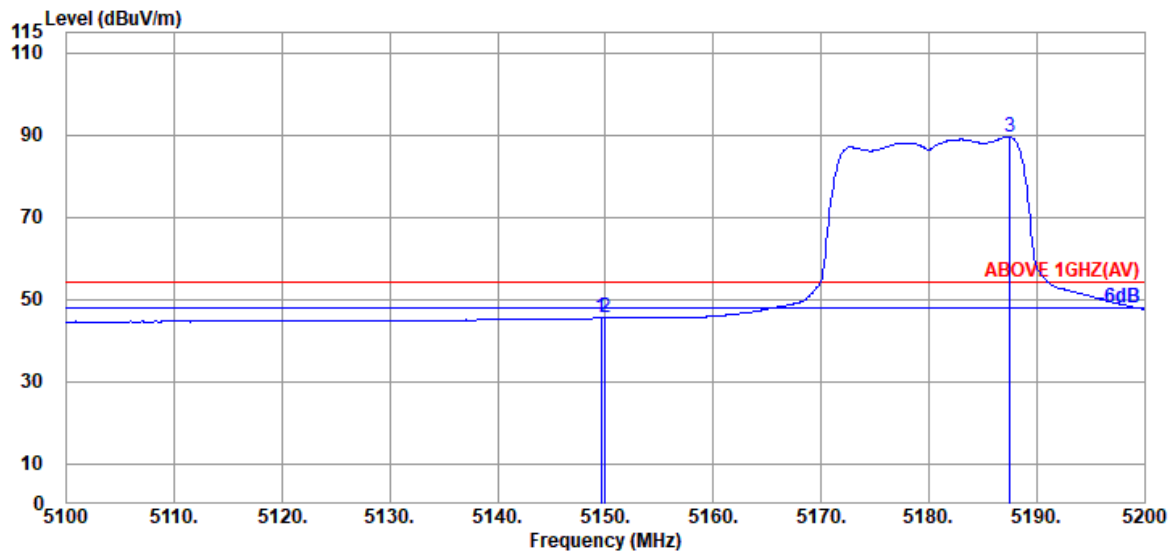


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	10.70	34.35	34.84	45.39	54.00	8.61	Average
5150.000	34.20	10.70	34.35	34.85	45.40	54.00	8.60	Average
@ 5187.500	34.20	10.74	34.34	79.01	89.61	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

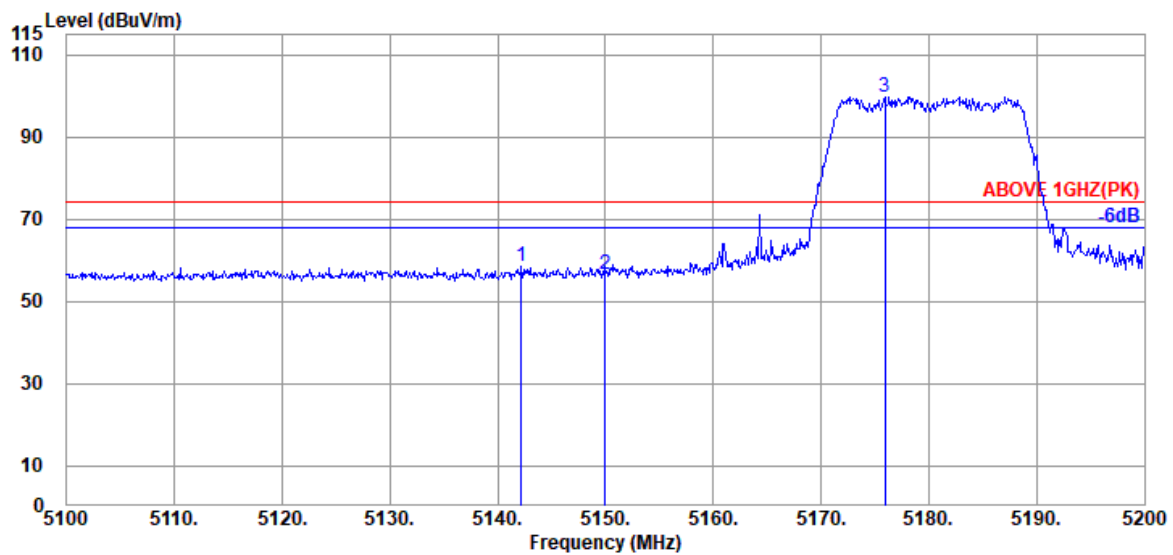

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.200	34.20	10.70	34.36	47.76	58.30	74.00	15.70	Peak
5150.000	34.20	10.70	34.35	46.16	56.71	74.00	17.29	Peak
@ 5175.900	34.20	10.72	34.34	89.26	99.84	---	---	Peak

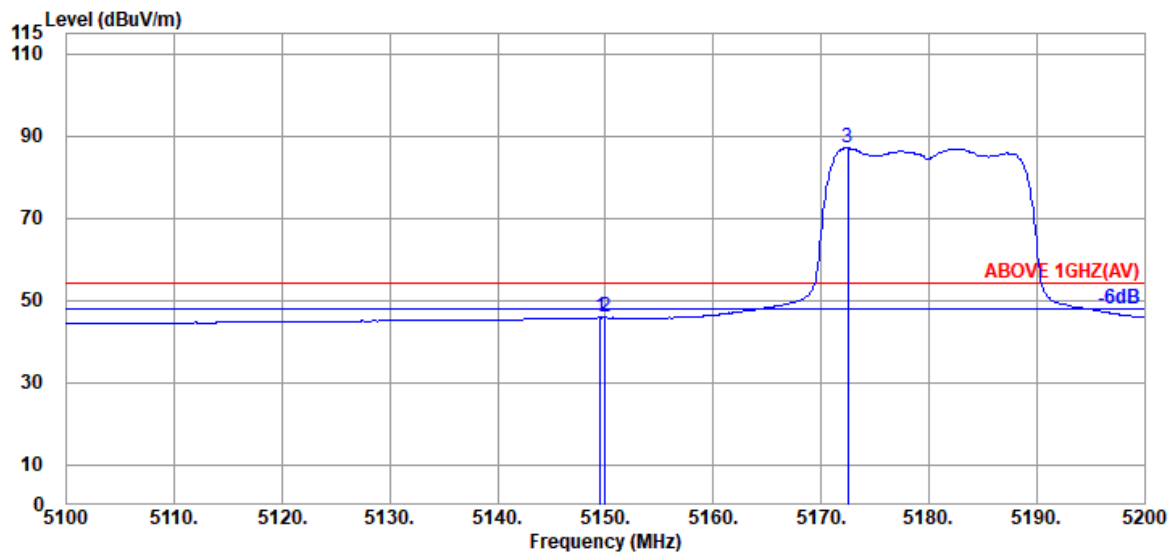


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	10.70	34.35	35.22	45.77	54.00	8.23	Average
5150.000	34.20	10.70	34.35	35.19	45.74	54.00	8.26	Average
@ 5172.500	34.20	10.72	34.34	76.47	87.05	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

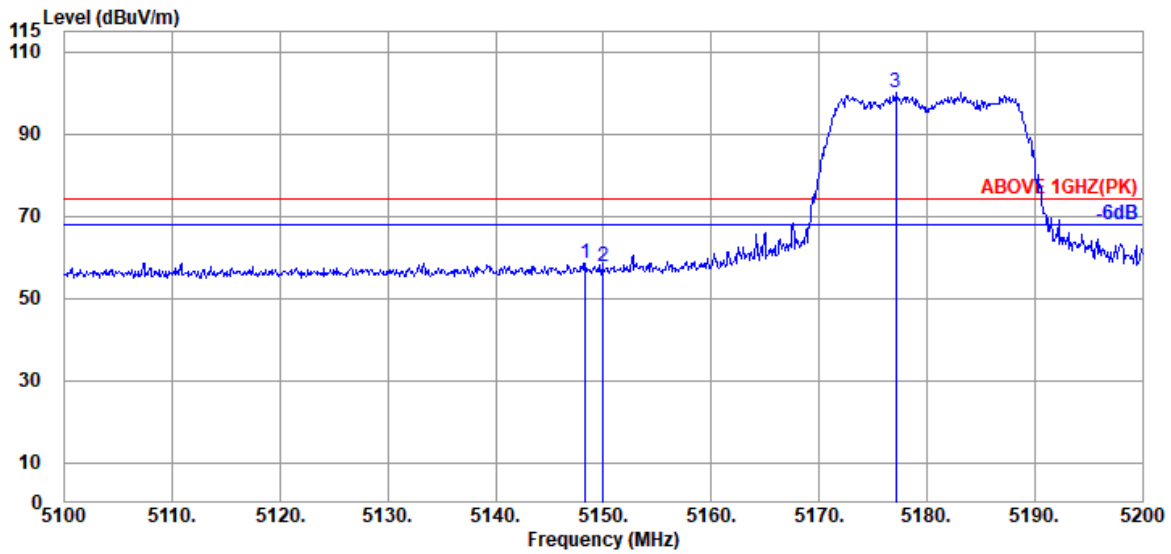

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.20	10.70	34.35	47.98	58.53	74.00	15.47	Peak
5150.000	34.20	10.70	34.35	47.30	57.85	74.00	16.15	Peak
@ 5177.100	34.20	10.72	34.34	89.55	100.13	---	---	Peak

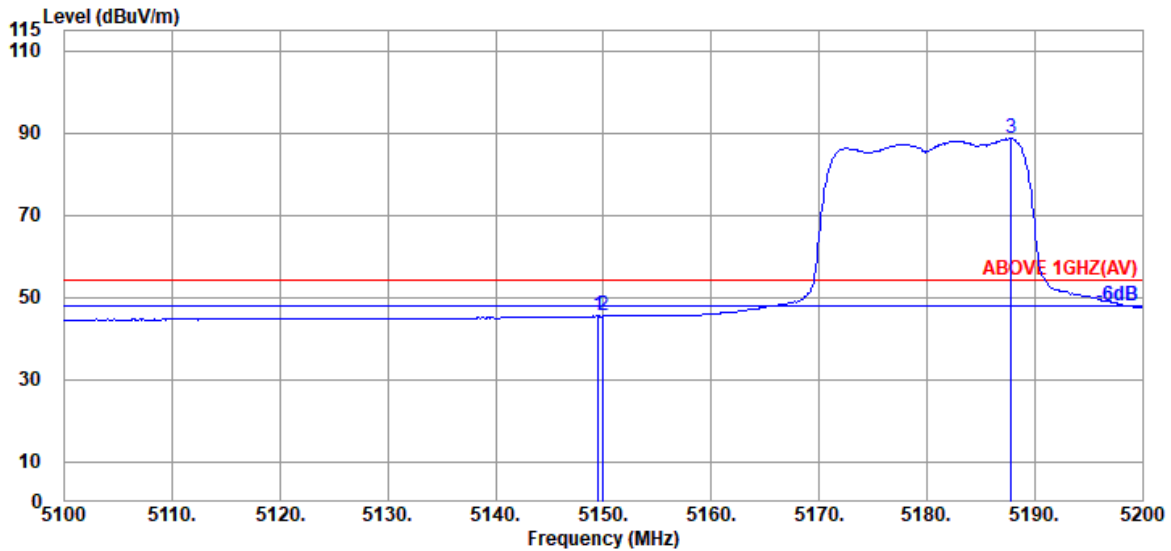


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	10.70	34.35	34.82	45.37	54.00	8.63	Average
5150.000	34.20	10.70	34.35	34.84	45.39	54.00	8.61	Average
@ 5187.800	34.20	10.74	34.34	78.01	88.61	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

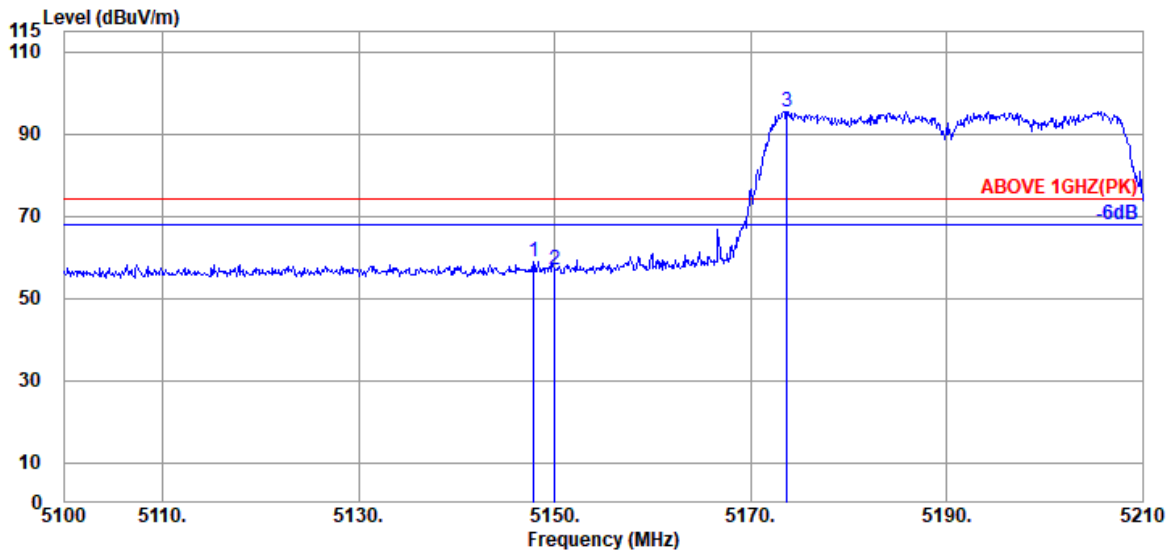

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.850	34.20	10.70	34.35	48.21	58.76	74.00	15.24	Peak
5150.050	34.20	10.70	34.35	46.48	57.03	74.00	16.97	Peak
@ 5173.700	34.20	10.72	34.34	84.84	95.42	---	---	Peak

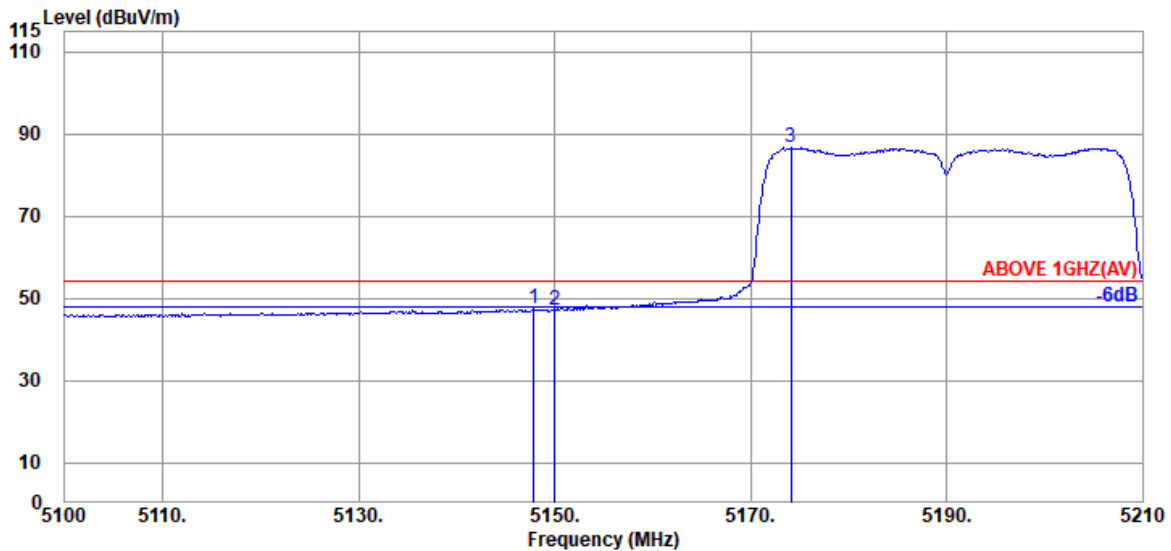


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.850	34.20	10.70	34.35	36.78	47.33	54.00	6.67	Average
5150.050	34.20	10.70	34.35	36.55	47.10	54.00	6.90	Average
@ 5174.140	34.20	10.72	34.34	76.04	86.62	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

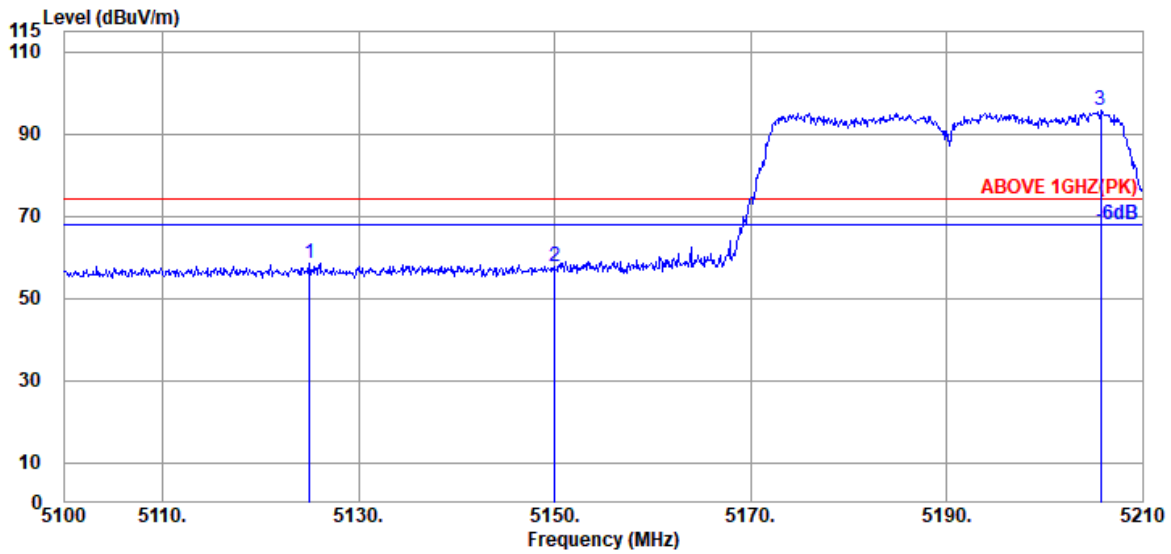

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.970	34.13	10.70	34.36	47.90	58.37	74.00	15.63	Peak
5150.050	34.20	10.70	34.35	47.06	57.61	74.00	16.39	Peak
@ 5205.710	34.25	10.74	34.33	84.92	95.58	---	---	Peak

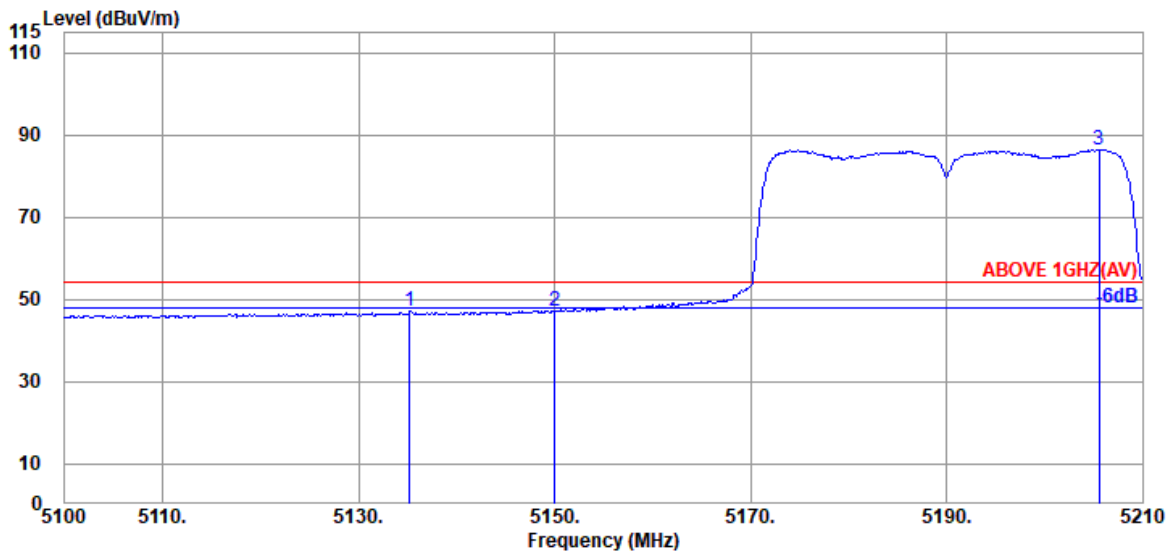

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.200	34.17	10.70	34.36	36.70	47.21	54.00	6.79	Average
5150.050	34.20	10.70	34.35	36.42	46.97	54.00	7.03	Average
@ 5205.600	34.25	10.74	34.33	75.81	86.47	---	---	Average

備註：“@”為主波，在此章節是不予以判定。

2. 最大輸出功率及 26dB/6dB 頻寬之量測

測試日期	2021/04/27~28	環境溫/濕度	25°C/55~65%
電纜損失	2.10dB	測試人員	Sean Wang
測試電壓	DC 3.7V (經電池供電)		

2.1. 最大輸出功率及 26dB/6dB 頻寬

模式 802.11a	測試頻率	發射頻寬(MHz)		Duty Cycle (X)	Average 輸出功率 (dBm)	10 log (1/X)	最大Average 輸出功率 (dBm)	限制值 (dBm)	限制值 (11dBm+10 log B)
	(MHz)	26dB	99%						
U-NII Band I	5180	14.49	16.576	1.000	9.94	0	9.94	24	N/A
	5200	19.77	16.573		9.98		9.98		
	5240	19.67	16.597		9.97		9.97		
模式 802.11a	測試頻率	發射頻寬(MHz)		Duty Cycle (X)	Average 輸出功率 (dBm)	10 log (1/X)	最大Average 輸出功率 (dBm)	限制值 (dBm)	限制值 (11dBm+10 log B)
	(MHz)	6dB	99%						
U-NII Band IV	5745	16.45	16.477	1.000	7.96	0	7.96	30	N/A
	5785	16.46	16.494		7.78		7.78		
	5825	16.37	16.492		7.01		7.01		

註: 當Duty cycle<98%, 最大輸出功率必需要加上duty cycle factor 10log(1/x)。
(x=duty cycle, B=26dB發射頻寬)


模式 802.11n-HT20	測試頻率	發射頻寬(MHz)		Duty Cycle (X)	Average 輸出功率 (dBm)	10 log (1/X)	最大Average 輸出功率 (dBm)	限制值 (dBm)	限制值 (11dBm+10 log B)
	(MHz)	26dB	99%						
U-NII Band I	5180	20.00	17.645	1.000	9.06	0	9.06	24	N/A
	5200	19.77	17.631		9.08		9.08		
	5240	19.76	17.634		9.66		9.66		
模式 802.11n-HT20	測試頻率	發射頻寬(MHz)		Duty Cycle (X)	Average 輸出功率 (dBm)	10 log (1/X)	最大Average 輸出功率 (dBm)	限制值 (dBm)	限制值 (11dBm+10 log B)
	(MHz)	6dB	99%						
U-NII Band IV	5745	17.62	17.638	1.000	8.14	0	8.14	30	N/A
	5785	17.62	17.628		7.93		7.93		
	5825	17.63	17.651		7.19		7.19		


註: 當Duty cycle<98%, 最大輸出功率必需要加上duty cycle factor 10log(1/x)。
(x=duty cycle, B=26dB發射頻寬)


模式 802.11n-HT40	測試頻率	發射頻寬(MHz)		Duty Cycle (X)	Average 輸出功率 (dBm)	10 log (1/X)	最大Average 輸出功率 (dBm)	限制值 (dBm)	限制值 (11dBm+10 log B)
	(MHz)	26dB	99%						
U-NII Band I	5190	39.79	36.183	0.974	8.01	0.11	8.12	24	N/A
	5230	39.90	36.166		8.41		8.52		
模式 802.11n-HT40	測試頻率	發射頻寬(MHz)		Duty Cycle (X)	Average 輸出功率 (dBm)	10 log (1/X)	最大Average 輸出功率 (dBm)	限制值 (dBm)	限制值 (11dBm+10 log B)
	(MHz)	6dB	99%						
U-NII Band IV	5745	36.34	36.167	0.974	7.16	0.11	7.27	30	N/A
	5795	36.02	36.139		6.78		6.89		

註: 當Duty cycle<98%, 最大輸出功率必需要加上duty cycle factor 10log(1/x)。
(x=duty cycle, B=26dB發射頻寬)

2.2. 26dB/6dB 頻寬之量測圖

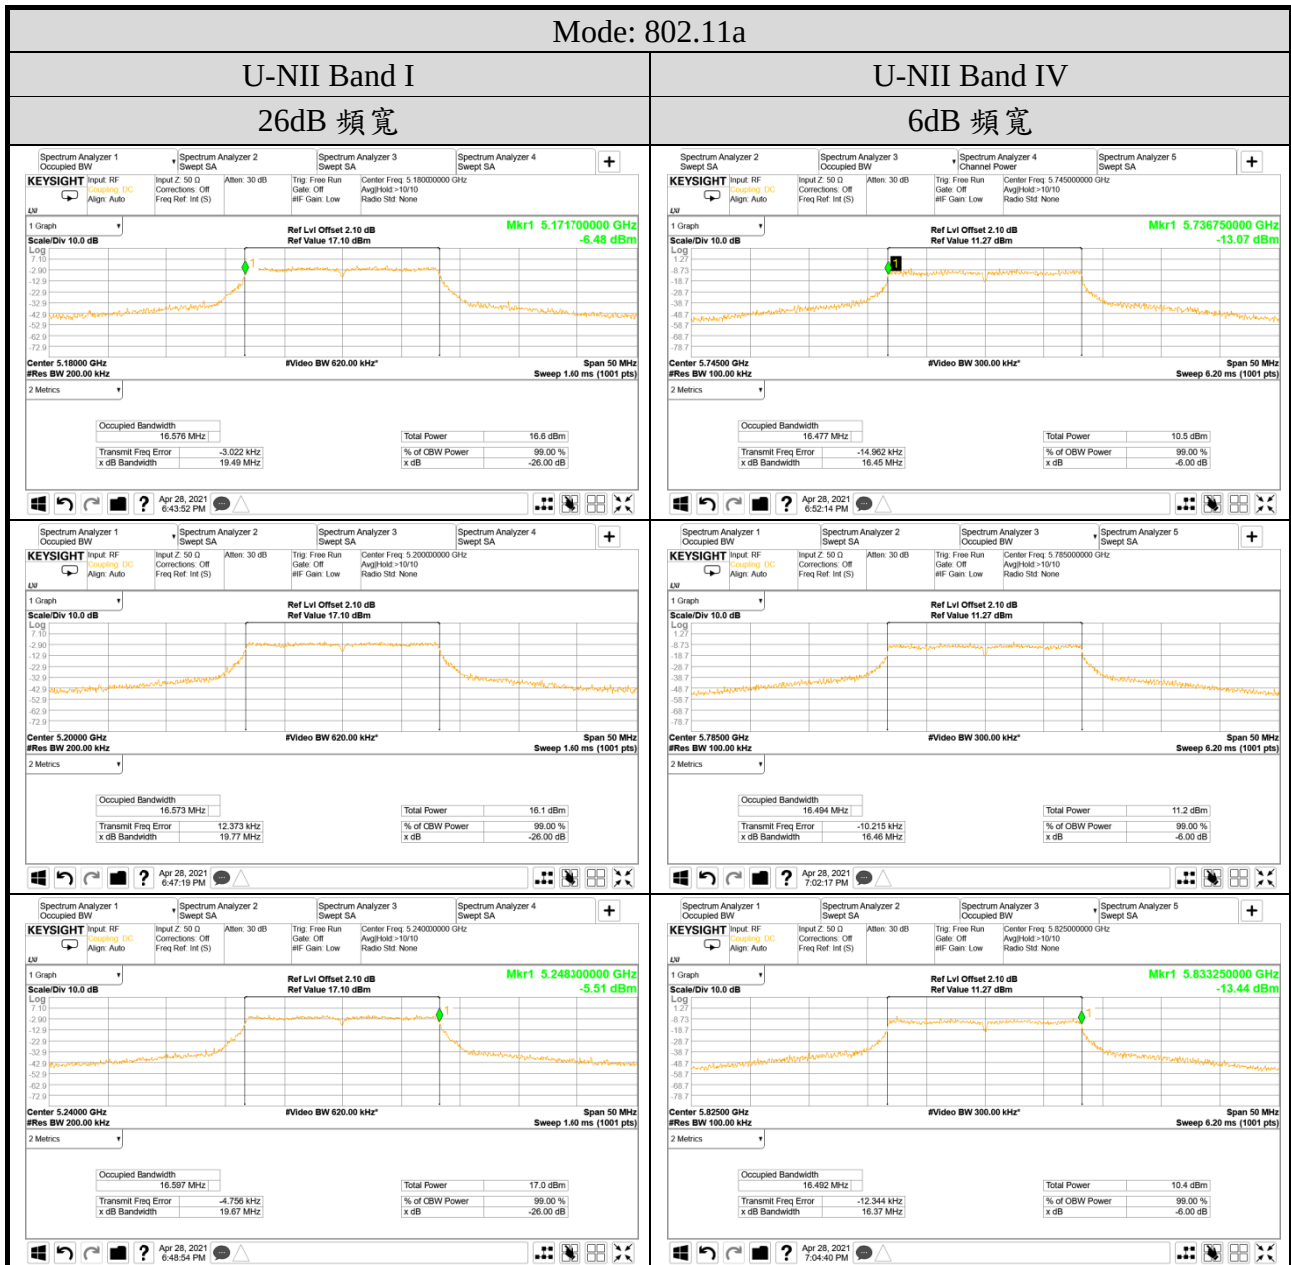

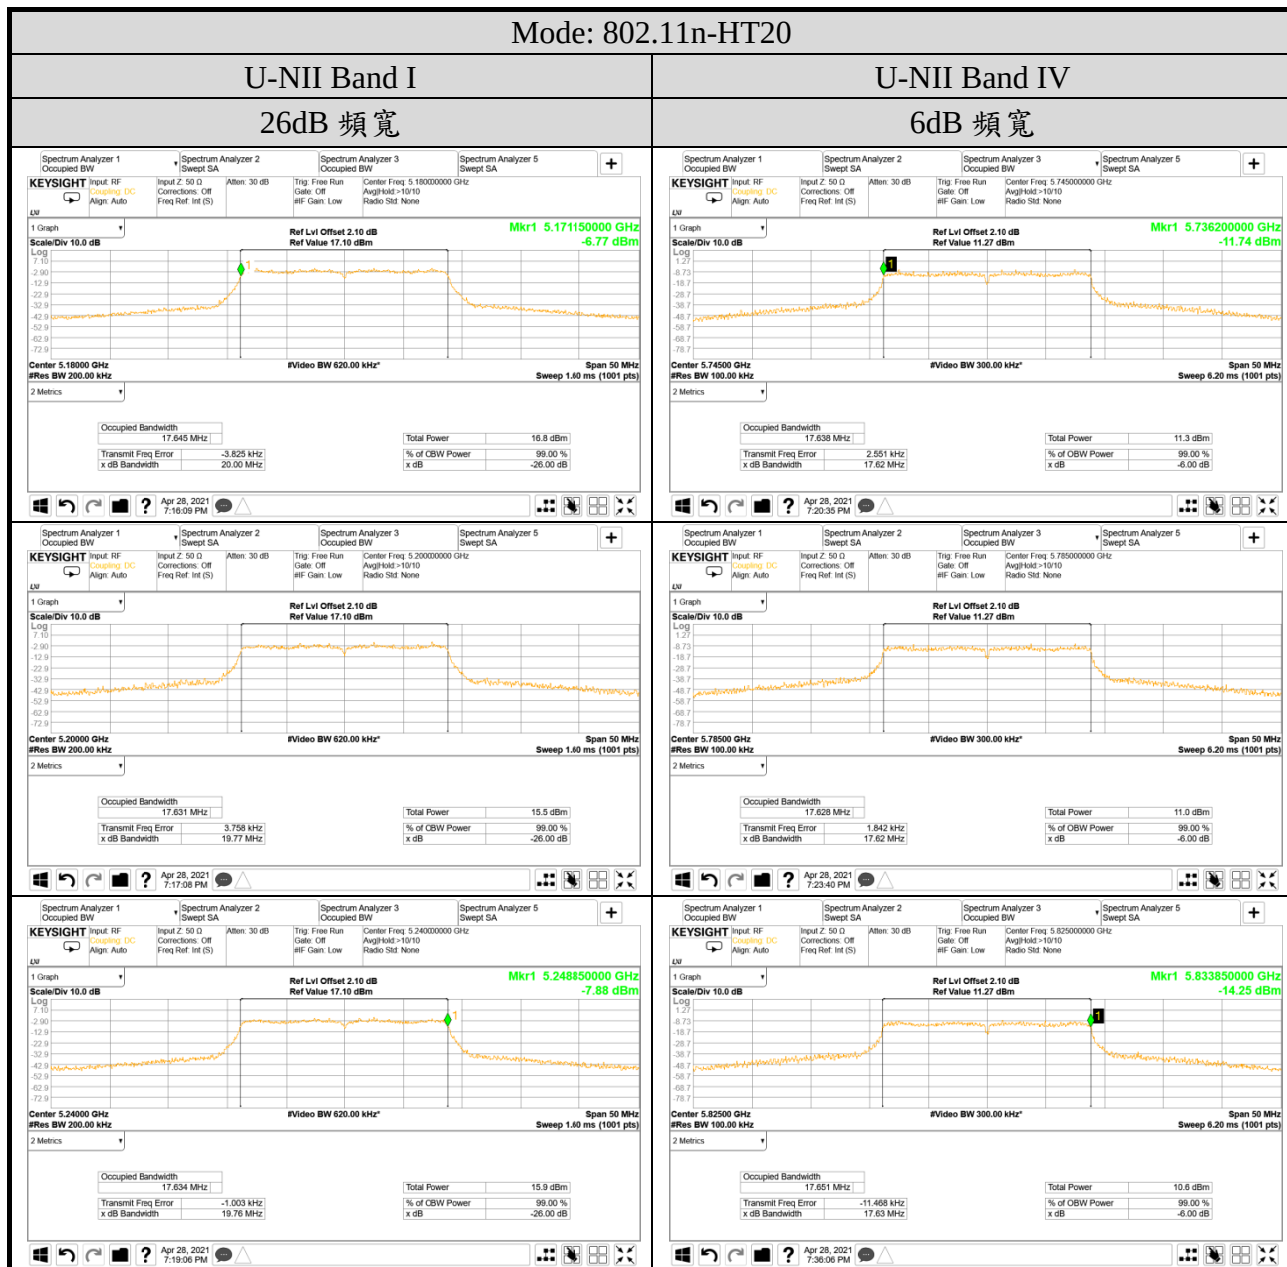

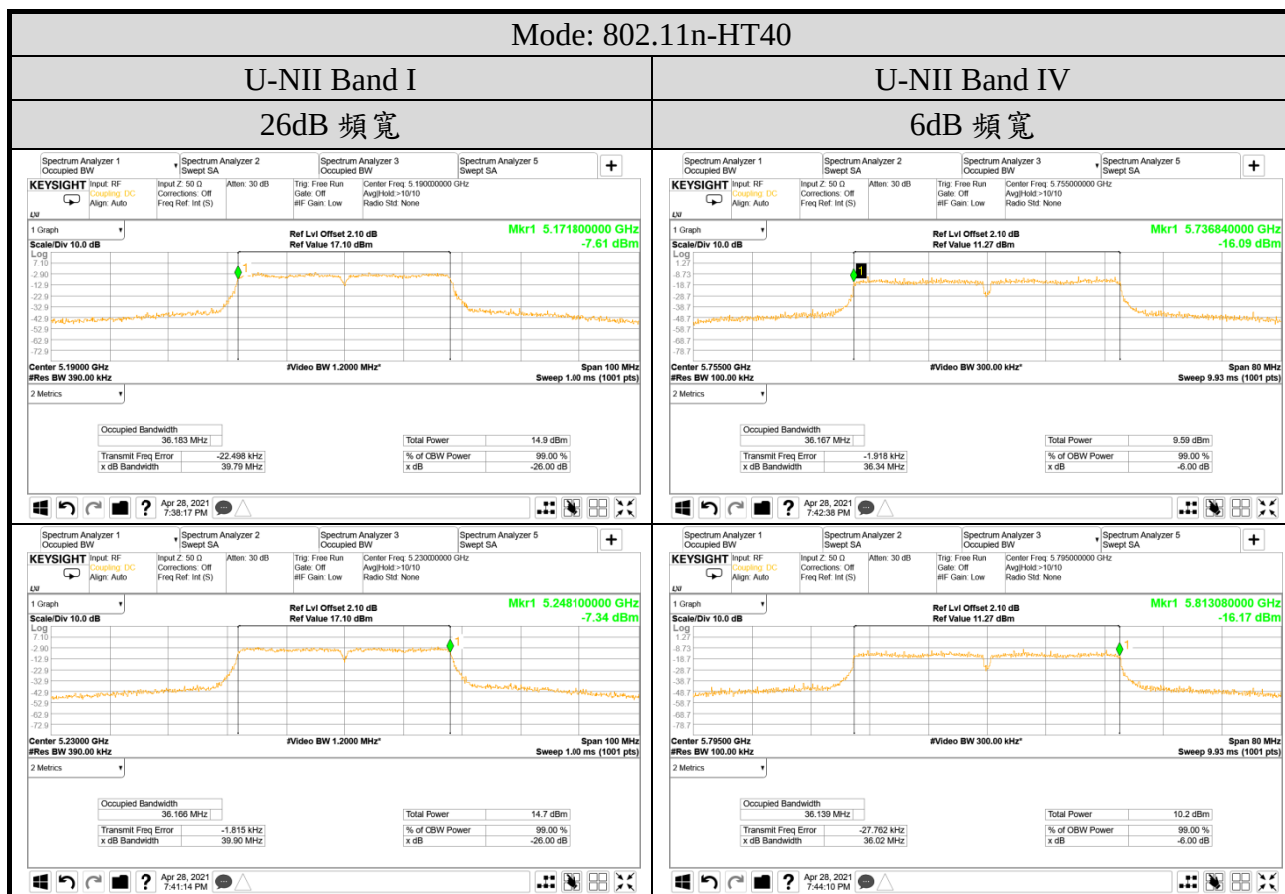

3. 峰值功率頻譜密度之量測

測試日期	2021/04/28	環境溫/濕度	25°C/65%
電纜損失	2.10dB	測試人員	Sean Wang
測試電壓	DC 3.7V (經電池供電)		
Simultaneous Factor10 log(n)(Note: “n” is antenna number)			0dB


3.1. 峰值功率頻譜密度

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11a	I	5180	0.723	11 dBm/MHz
		5200	0.786	
		5240	0.739	
	IV ^{Note2}	5745	-6.783	30dBm/500 kHz
		5785	-6.795	
		5825	-7.387	
802.11n-HT20	I	5180	-0.461	11 dBm/MHz
		5200	-0.425	
		5240	-0.525	
	IV ^{Note2}	5745	-7.239	30dBm/500 kHz
		5785	-7.089	
		5825	-7.750	
802.11n-HT40	I	5190	-4.166	11 dBm/MHz
		5230	-4.379	
	IV ^{Note2}	5755	-10.548	30dBm/500 kHz
		5795	-10.643	

Note 1: All results have been included cable loss and Simultaneous Factor and correct duty factor.

Note 2: BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.







3.2. 峰值功率頻譜密度之量測圖

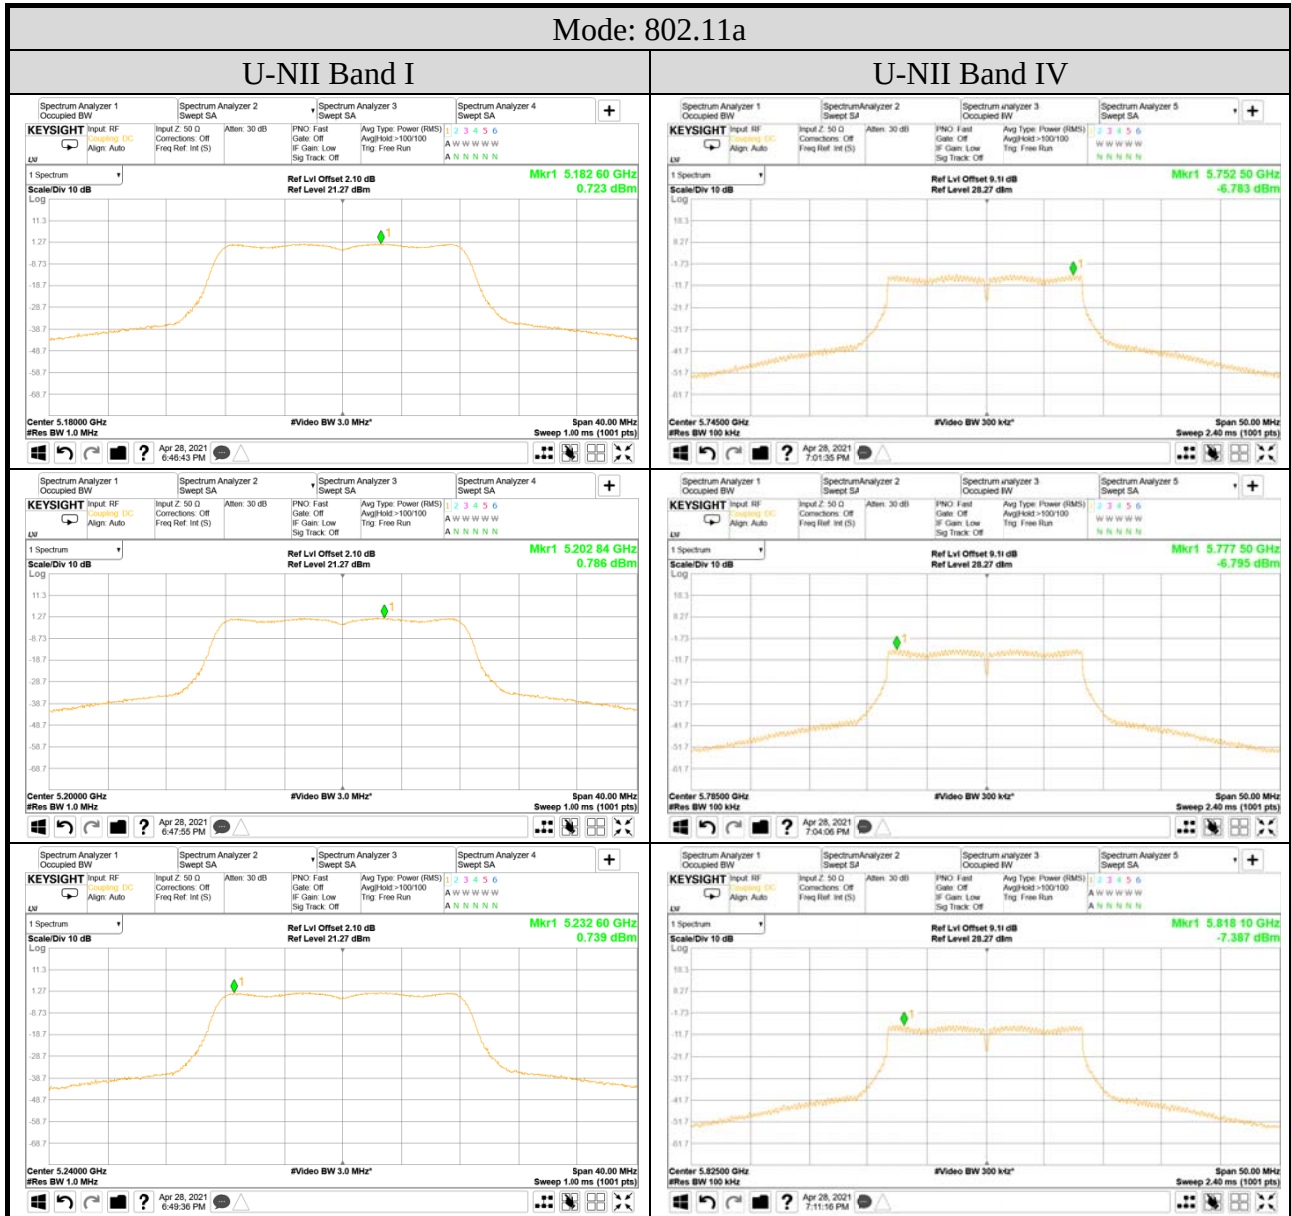


Mode: 802.11n-HT20

U-NII Band I

U-NII Band IV

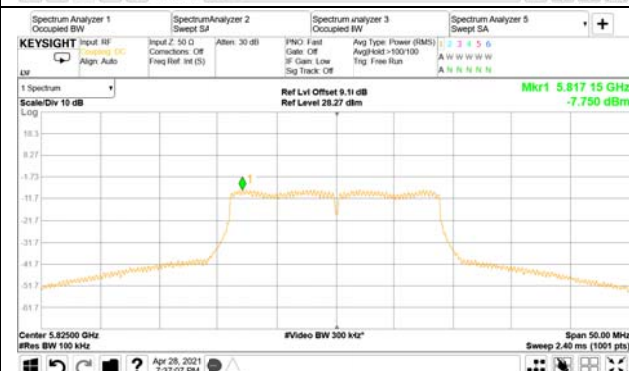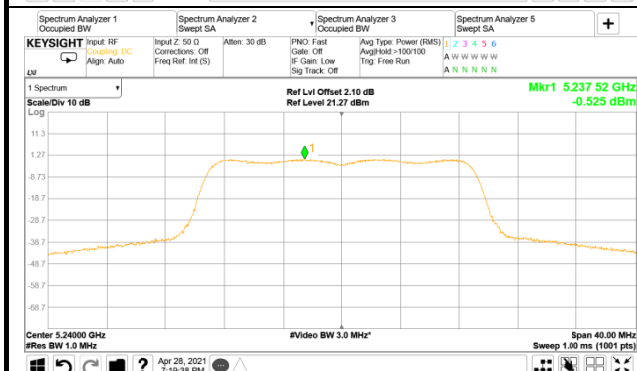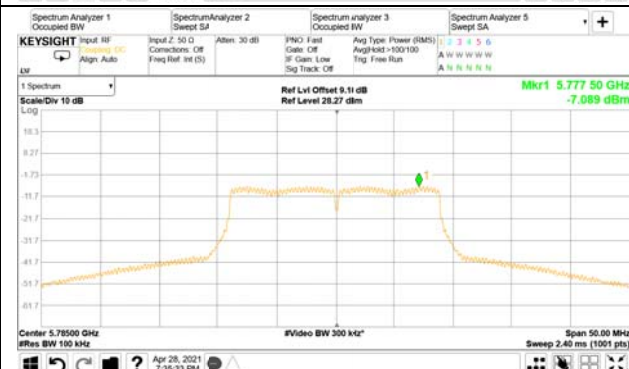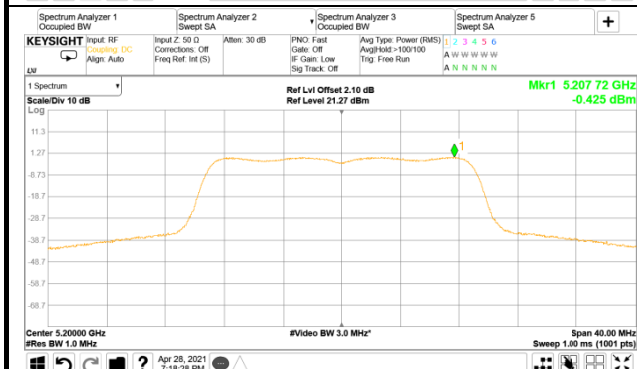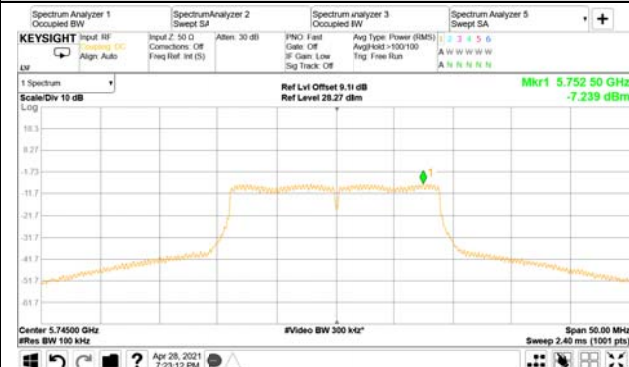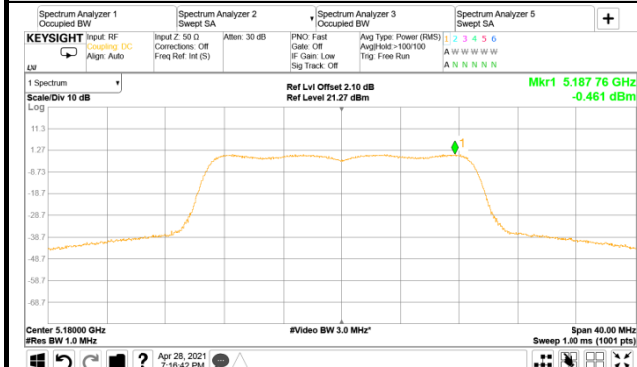

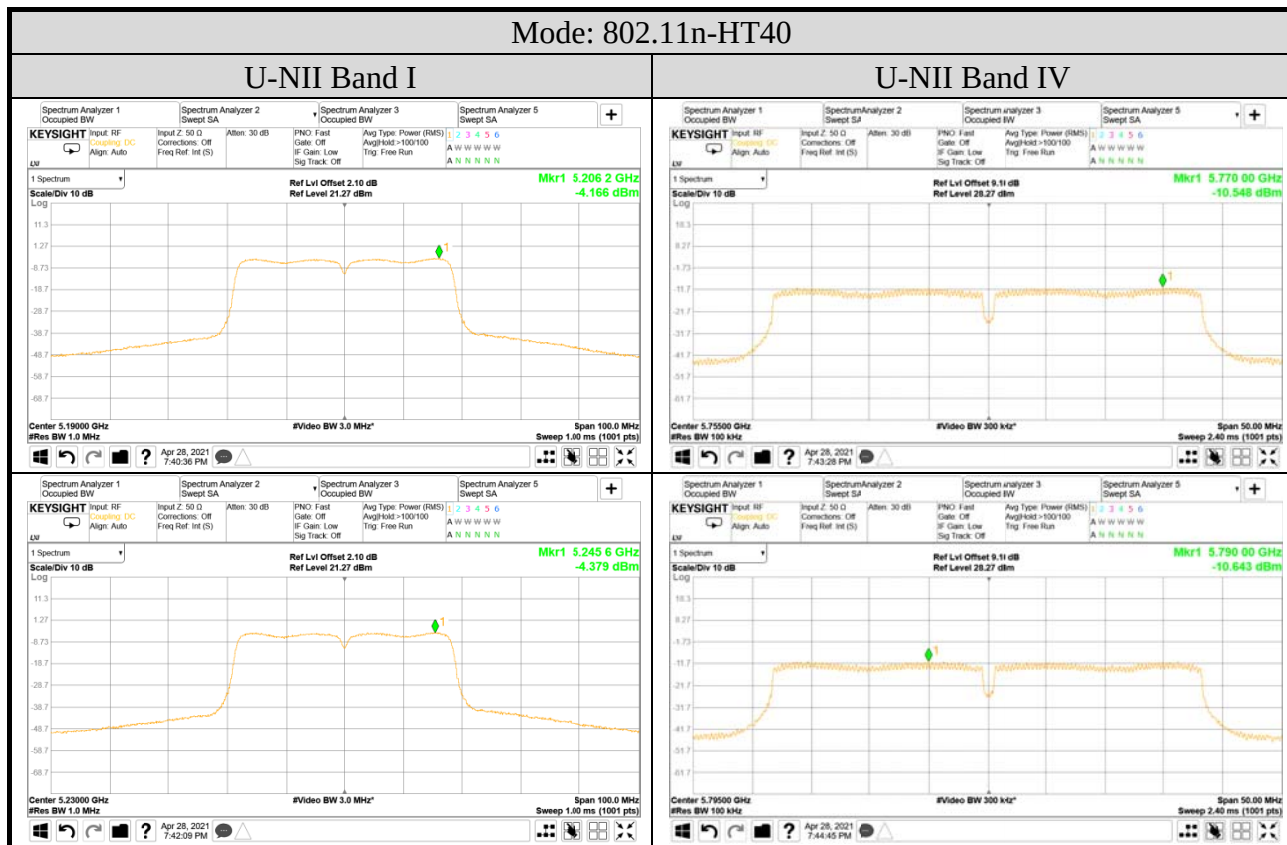

4. 頻帶邊緣之 RF 輻射發射之量測

測試日期	2021/05/04	環境溫/濕度	24°C/64%
測試電壓	DC 3.7V (經電池供電)	測試人員	Sean Wang
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0dB

