

附錄 二


受測裝置之測試照片

1 輻射量測之配置照片

2.1. 量測頻率範圍:30MHz-1GHz


發射模式-平放

C1M2001121, 廠牌: SES-imagotag, 型號: EDG2-0270-B

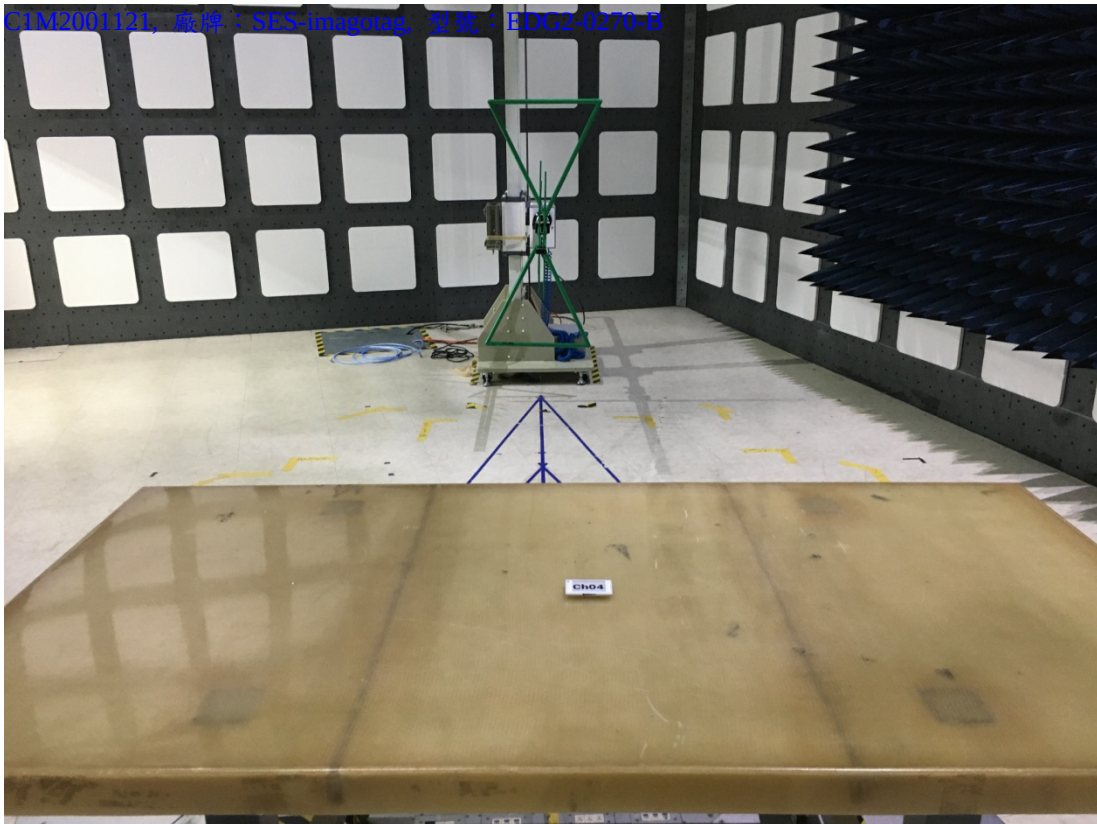


發射模式-站立

C1M2001121, 廠牌: SES-imagotag, 型號: EDG2-0270-B

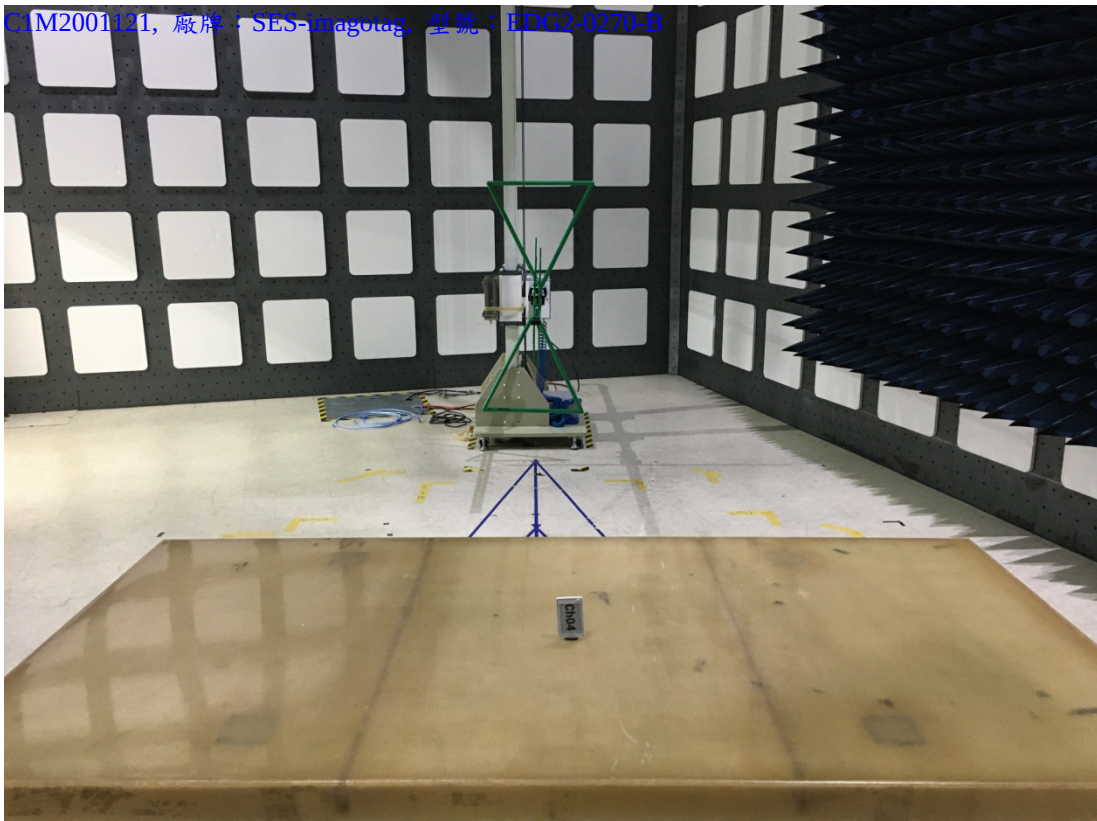

發射模式-側立

C1M2001121, 廠牌: SES-imagotag, 型號: EDG2-0270-B

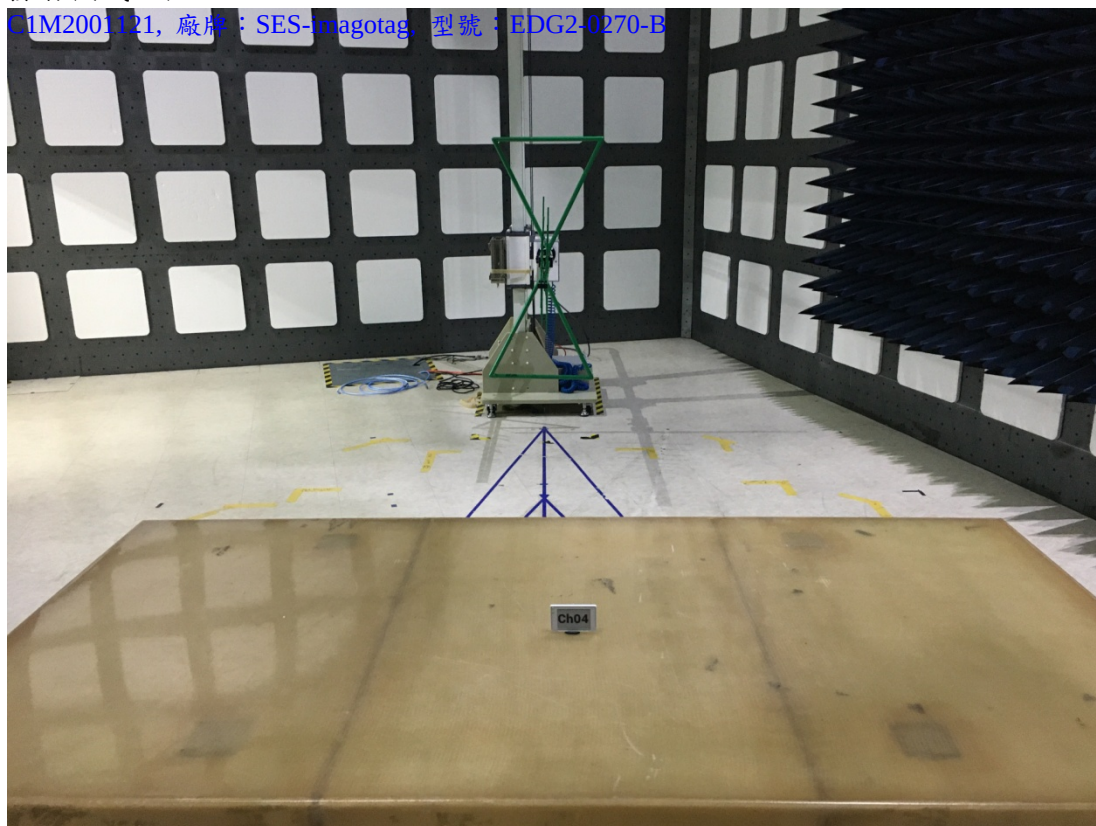

2.2. 量測頻率高於 1GHz 之測試

發射模式-平放

C1M2001121, 廠牌: SES-imagotag, 型號: EDG2-0270-B



發射模式-站立

C1M2001121, 廠牌: SES-imagotag, 型號: EDG2-0270-B



發射模式-側立

C1M2001121, 廠牌: SES-imagotag, 型號: EDG2-0270-B



對傳照

C1M2001121, 廠牌: SES-imagotag, 型號: EDG2-0270-B



2 RF Conducted 量測

C1M2001121, 廠牌: SES-imagotag, 型號: EDG2-0270-B

