Site: AC1	Time: 2019/05/06 - 20:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2422MHz - Ant 0+1	

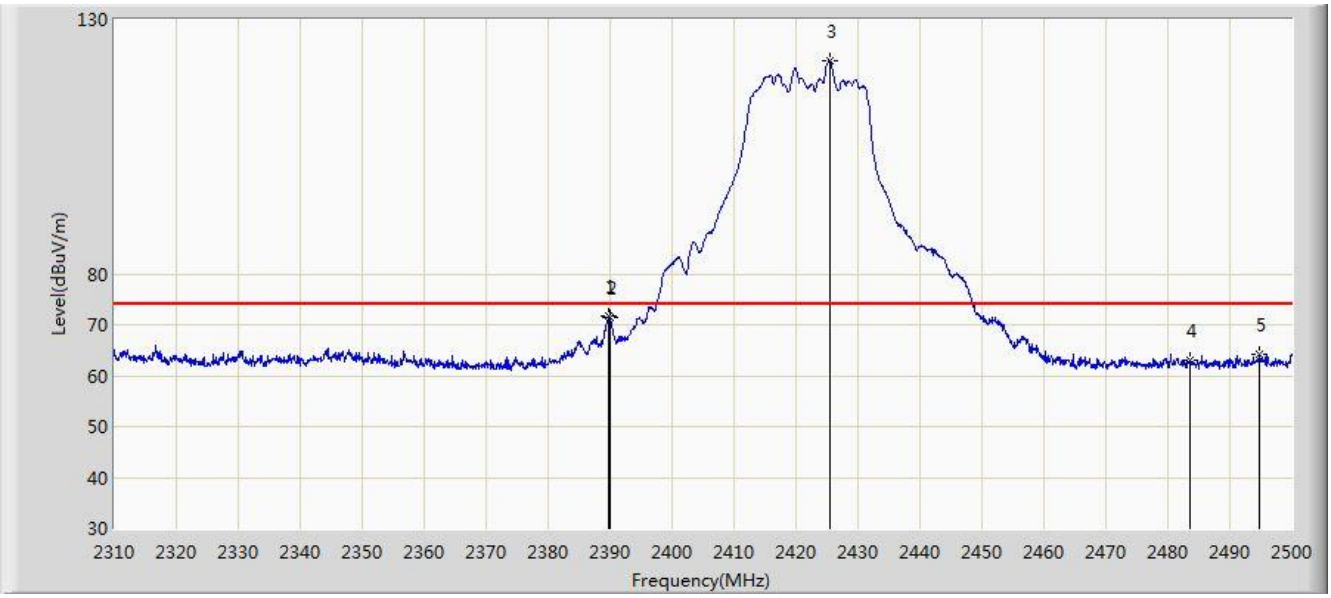

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	71.702	74.063	-2.298	74.000	-2.361	PK
2			2390.000	71.393	73.753	-2.607	74.000	-2.360	PK
3		*	2425.425	122.025	124.244	N/A	N/A	-2.219	PK
4			2483.500	63.058	65.044	-10.942	74.000	-1.986	PK
5			2494.680	64.328	66.269	-9.672	74.000	-1.942	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2422MHz - Ant 0+1	

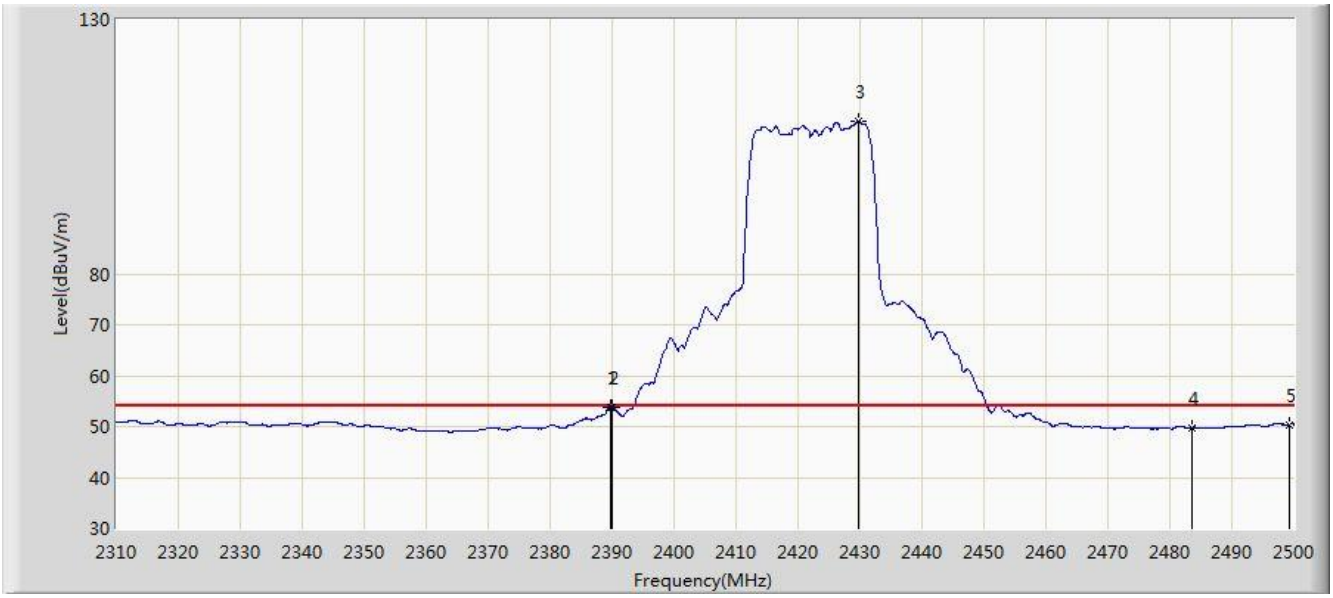

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	53.795	55.908	-0.205	54.000	-2.113	AV
2			2390.000	53.773	55.886	-0.227	54.000	-2.113	AV
3		*	2429.700	109.902	112.084	N/A	N/A	-2.182	AV
4			2483.500	49.782	51.873	-4.218	54.000	-2.090	AV
5			2499.335	50.404	52.342	-3.596	54.000	-1.938	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2437MHz - Ant 0+1	

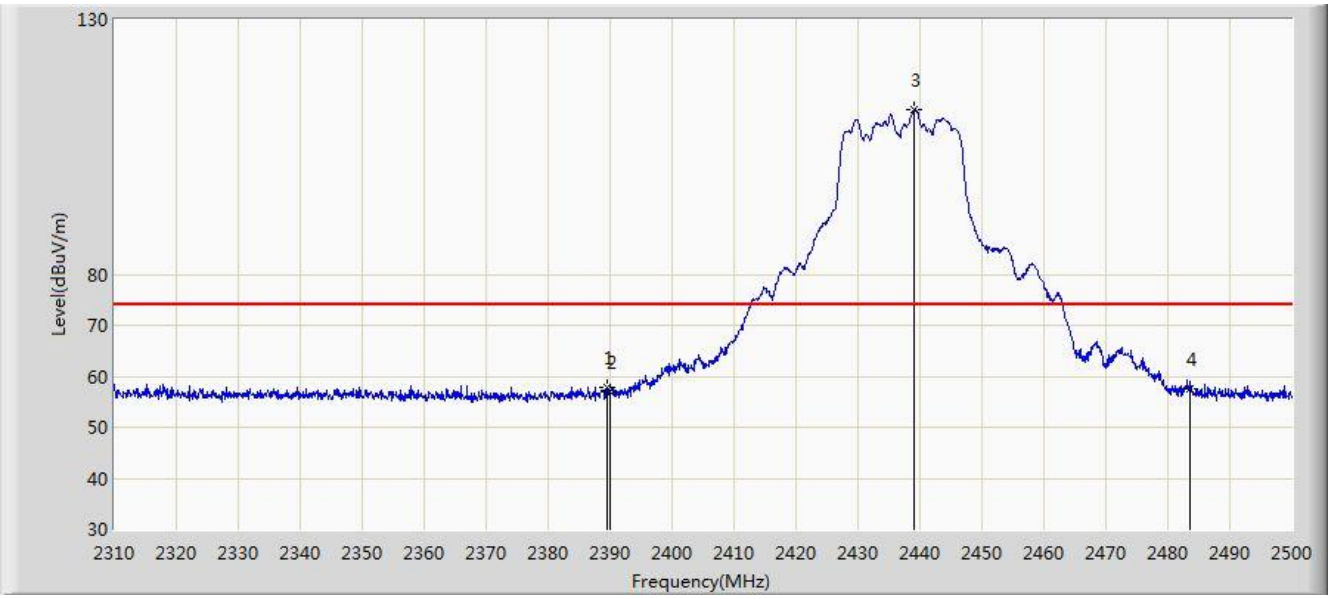

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.420	57.921	60.283	-16.079	74.000	-2.363	PK
2			2390.000	56.856	59.216	-17.144	74.000	-2.360	PK
3		*	2439.105	112.184	114.348	N/A	N/A	-2.164	PK
4			2483.500	57.568	59.554	-16.432	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2437MHz - Ant 0+1	

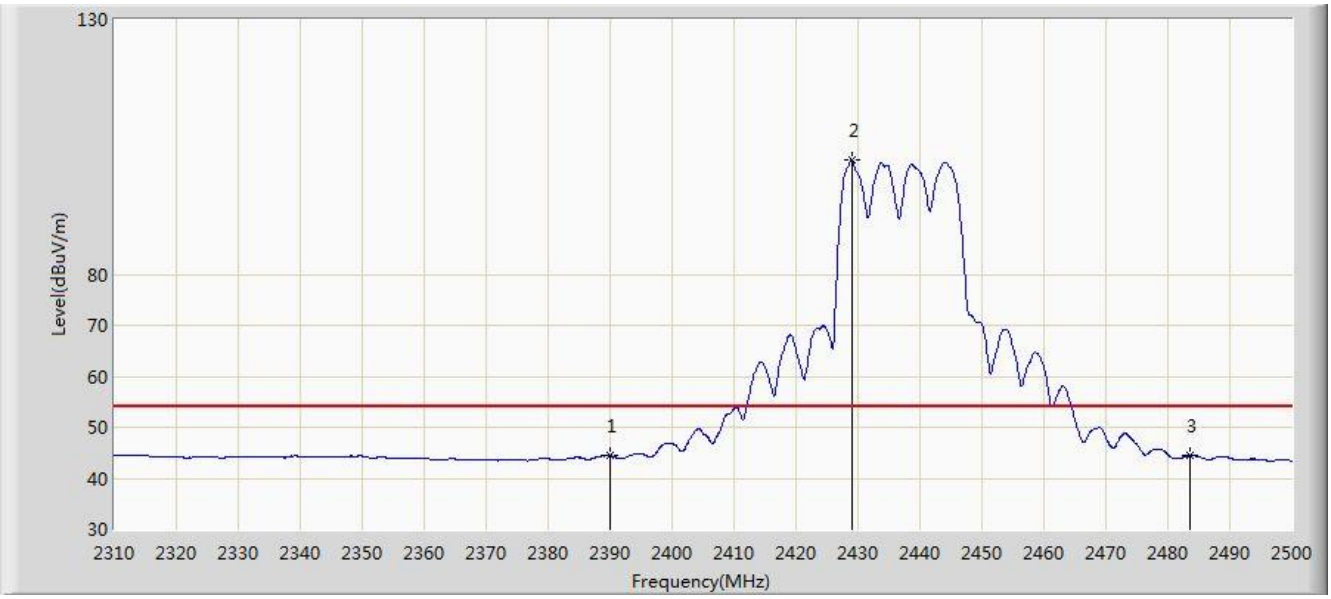

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.412	46.772	-9.588	54.000	-2.360	AV
2		*	2428.940	102.350	104.555	N/A	N/A	-2.204	AV
3			2483.500	44.484	46.470	-9.516	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2437MHz - Ant 0+1	

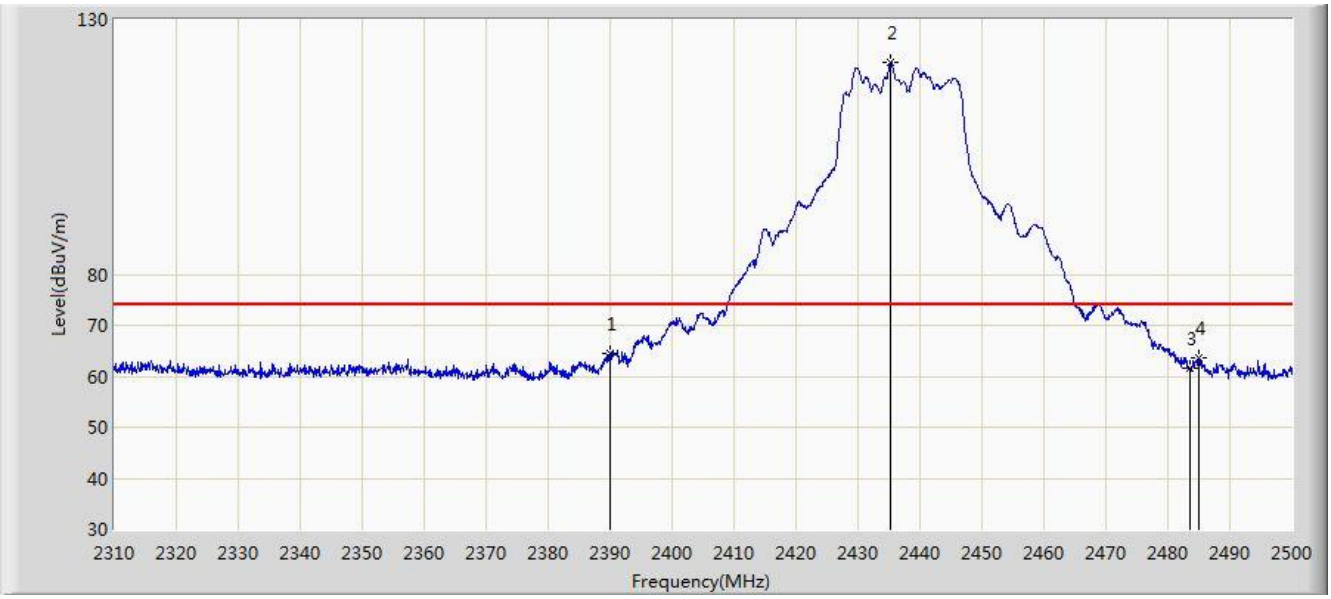

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	64.352	66.712	-9.648	74.000	-2.360	PK
2		*	2435.305	121.638	123.817	N/A	N/A	-2.179	PK
3			2483.500	61.513	63.499	-12.487	74.000	-1.986	PK
4			2485.085	63.534	65.514	-10.466	74.000	-1.980	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2437MHz - Ant 0+1	

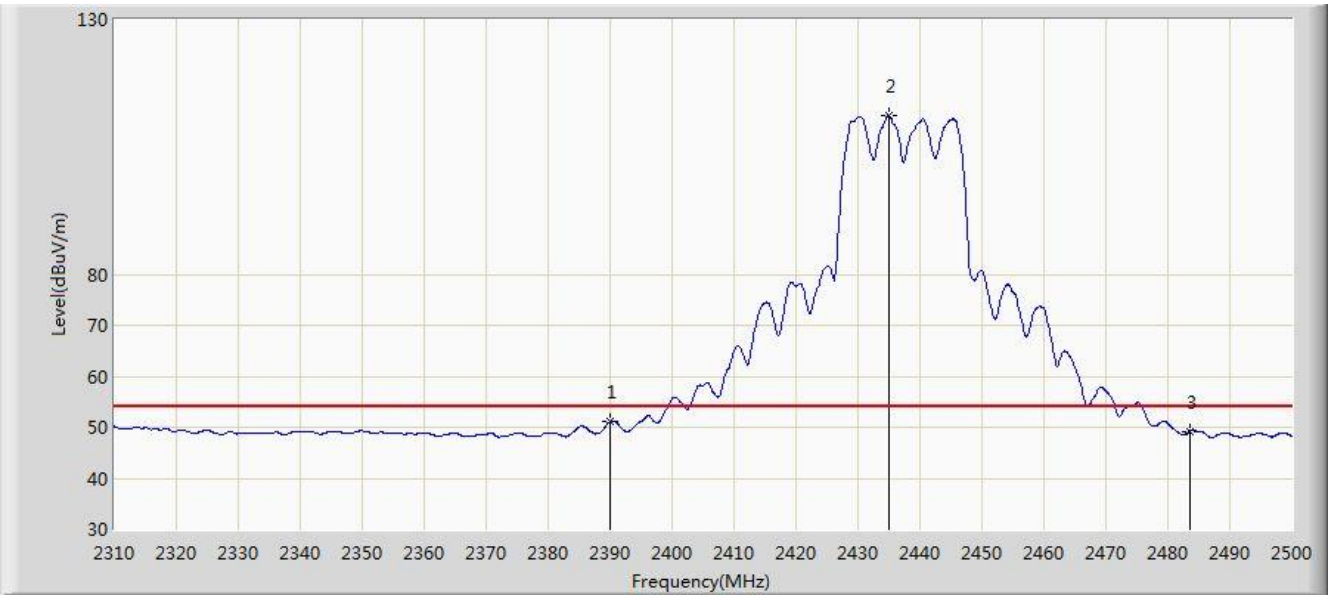

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.076	53.436	-2.924	54.000	-2.360	AV
2		*	2434.925	111.145	113.325	N/A	N/A	-2.180	AV
3			2483.500	49.271	51.257	-4.729	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2452MHz - Ant 0+1	

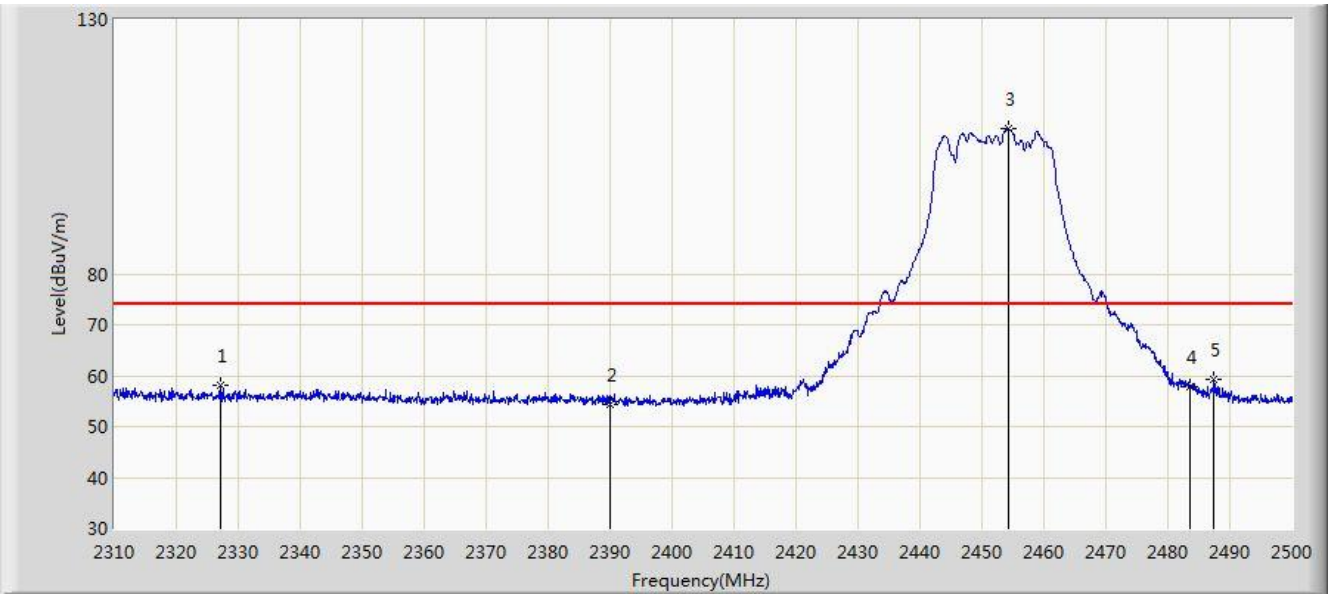

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2327.100	58.190	60.802	-15.810	74.000	-2.612	PK
2			2390.000	54.449	56.809	-19.551	74.000	-2.360	PK
3		*	2454.400	108.445	110.547	N/A	N/A	-2.103	PK
4			2483.500	57.705	59.691	-16.295	74.000	-1.986	PK
5			2487.460	59.184	61.154	-14.816	74.000	-1.970	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2452MHz - Ant 0+1	

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2333.180	42.896	45.483	-11.104	54.000	-2.587	AV
2			2390.000	42.222	44.582	-11.778	54.000	-2.360	AV
3		*	2453.165	99.226	101.333	N/A	N/A	-2.107	AV
4			2483.500	45.016	47.002	-8.984	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2452MHz - Ant 0+1	

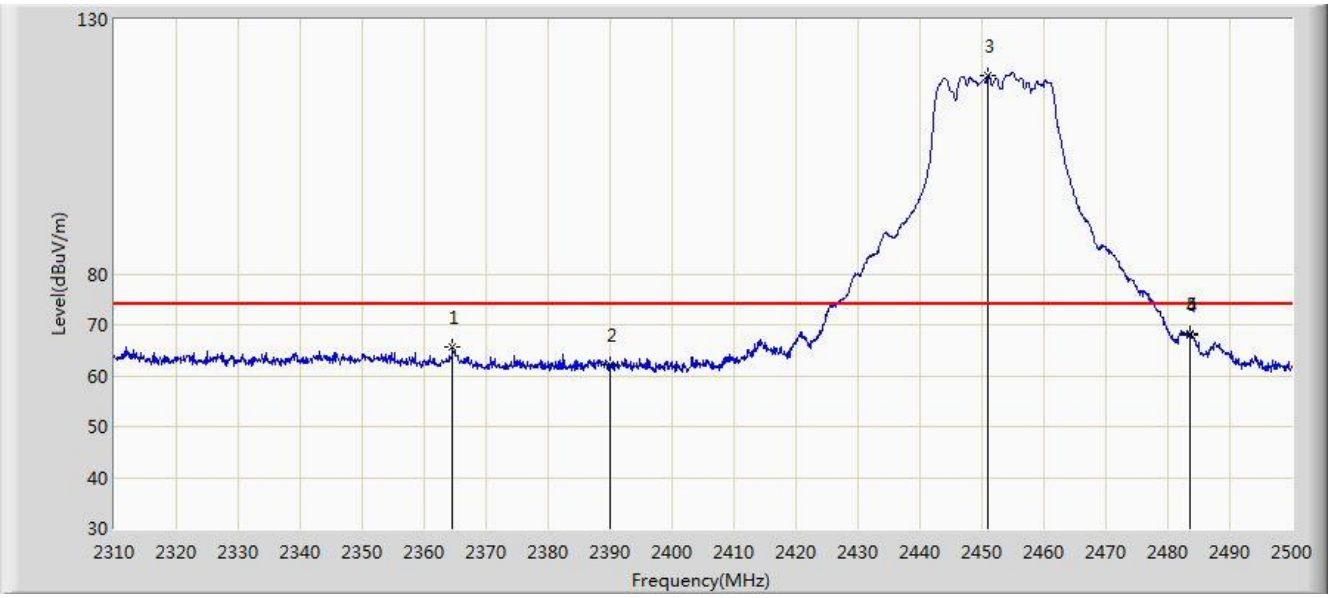

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2364.530	65.770	68.232	-8.230	74.000	-2.461	PK
2			2390.000	62.045	64.405	-11.955	74.000	-2.360	PK
3		*	2450.980	119.051	121.167	N/A	N/A	-2.116	PK
4			2483.500	67.967	69.953	-6.033	74.000	-1.986	PK
5			2483.565	68.244	70.230	-5.756	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2452MHz - Ant 0+1	

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2339.735	51.287	53.848	-2.713	54.000	-2.561	AV
2			2390.000	49.404	51.764	-4.596	54.000	-2.360	AV
3		*	2456.680	109.988	112.081	N/A	N/A	-2.093	AV
4			2483.500	53.135	55.121	-0.865	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2457MHz - Ant 0+1	

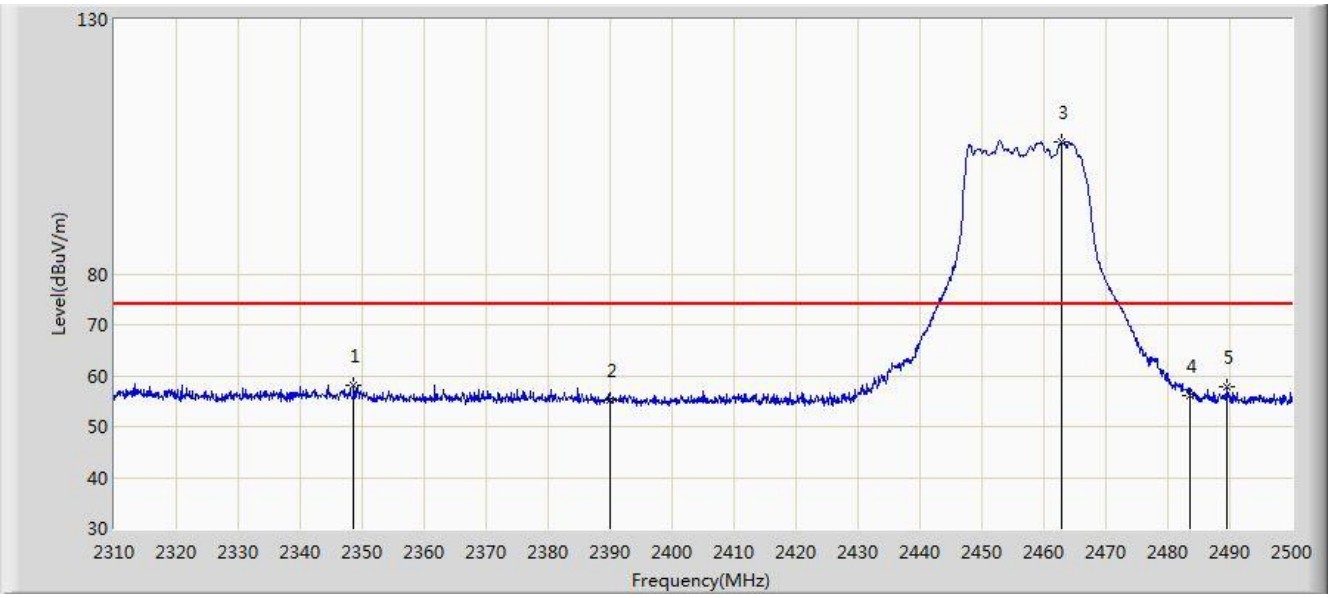

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2348.665	58.148	60.673	-15.852	74.000	-2.525	PK
2			2390.000	55.235	57.595	-18.765	74.000	-2.360	PK
3		*	2462.950	105.970	108.038	N/A	N/A	-2.068	PK
4			2483.500	55.945	57.931	-18.055	74.000	-1.986	PK
5			2489.455	57.878	59.840	-16.122	74.000	-1.963	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2457MHz - Ant 0+1	

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	42.420	44.780	-11.580	54.000	-2.360	AV
2		*	2463.520	97.245	99.311	N/A	N/A	-2.065	AV
3			2483.500	44.243	46.229	-9.757	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2457MHz - Ant 0+1	

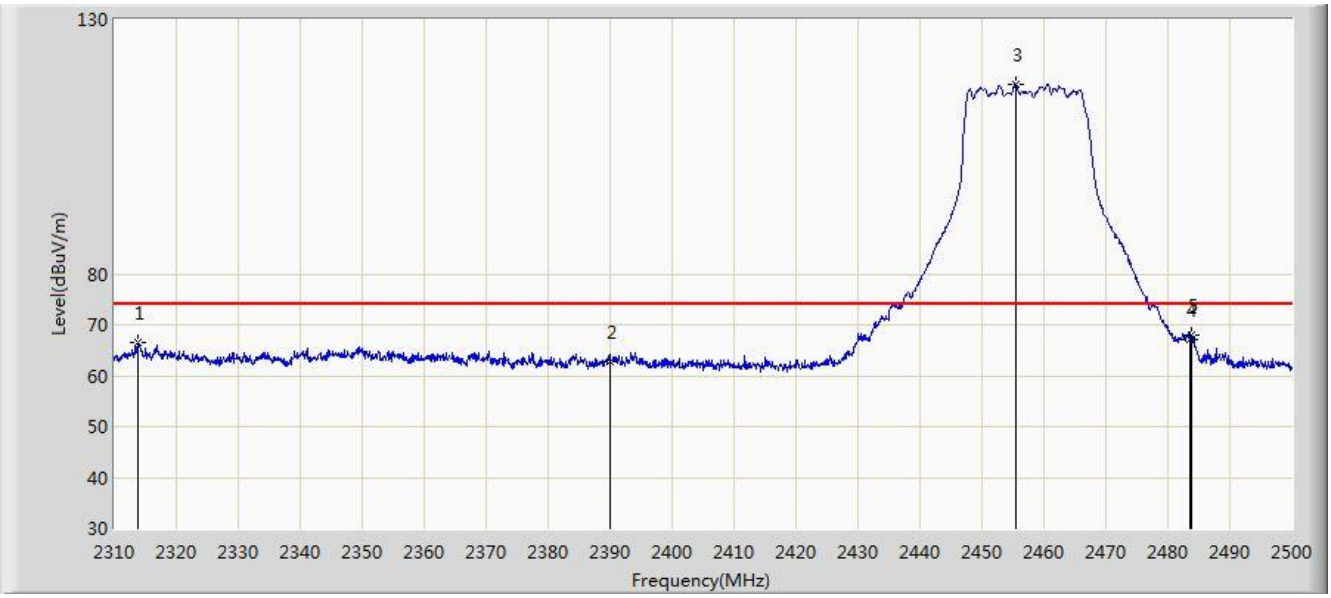

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2313.800	66.533	69.198	-7.467	74.000	-2.666	PK
2			2390.000	62.820	65.180	-11.180	74.000	-2.360	PK
3		*	2455.540	117.268	119.365	N/A	N/A	-2.097	PK
4			2483.500	67.014	69.000	-6.986	74.000	-1.986	PK
5			2483.850	67.909	69.893	-6.091	74.000	-1.984	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2457MHz - Ant 0+1	

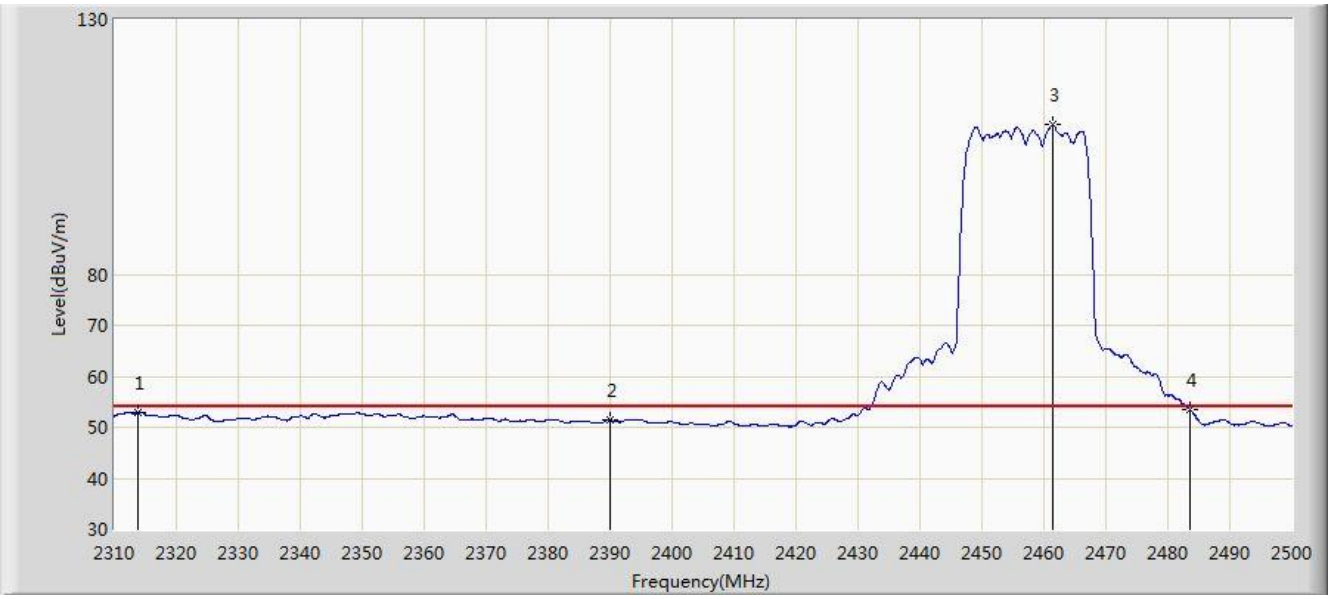

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2313.705	52.925	55.591	-1.075	54.000	-2.666	AV
2			2390.000	51.372	53.732	-2.628	54.000	-2.360	AV
3		*	2461.525	109.279	111.352	N/A	N/A	-2.073	AV
4			2483.500	53.493	55.479	-0.507	54.000	-1.986	AV

Site: AC1	Time: 2019/04/30 - 04:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2462MHz - Ant 0+1	

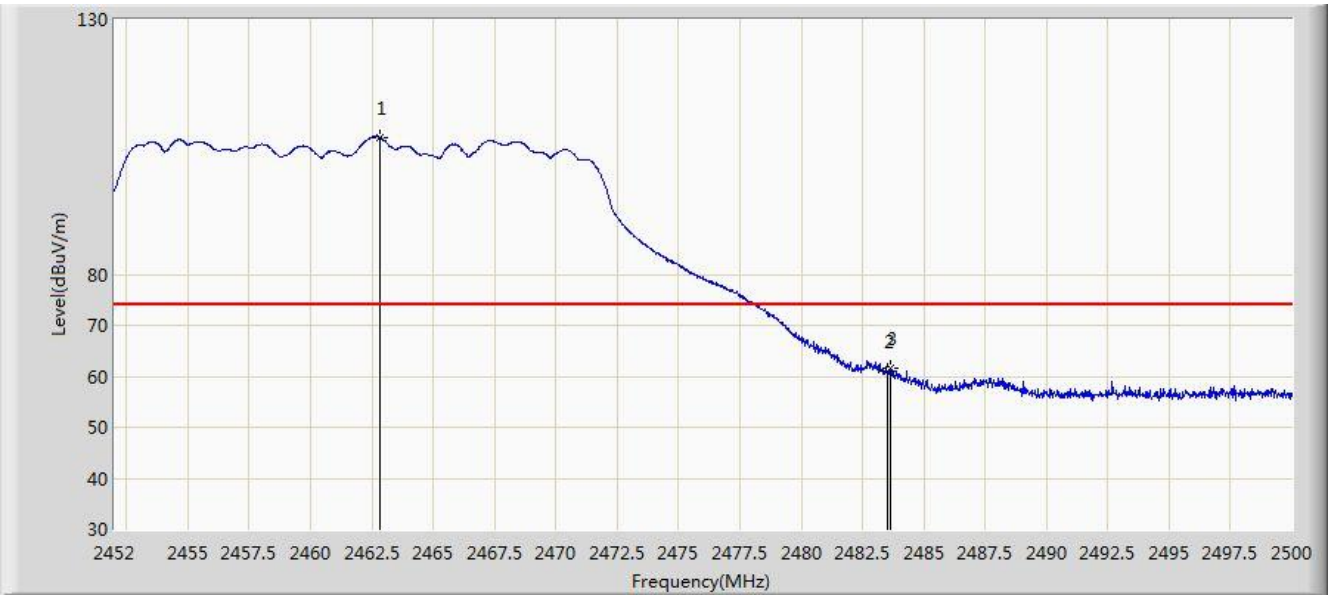

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.800	106.902	108.971	N/A	N/A	-2.069	PK
2			2483.500	60.899	62.885	-13.101	74.000	-1.986	PK
3			2483.656	61.551	63.536	-12.449	74.000	-1.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2462MHz - Ant 0+1	

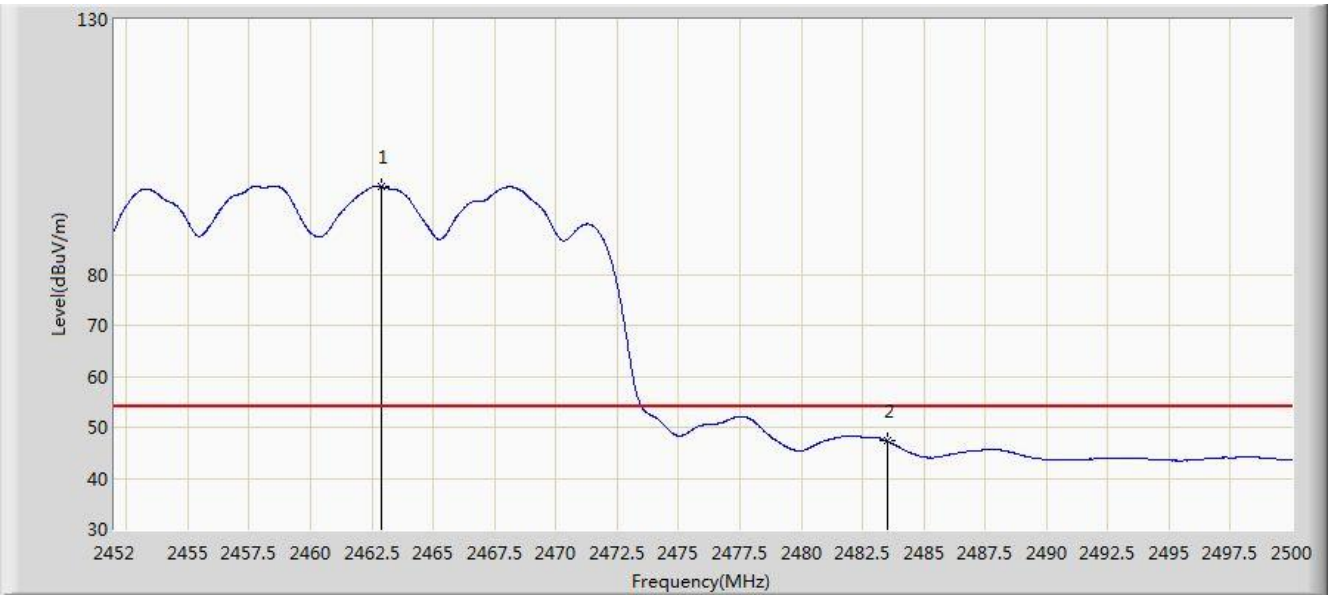

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.872	97.240	99.308	N/A	N/A	-2.068	AV
2			2483.500	47.327	49.313	-6.673	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2462MHz - Ant 0+1	

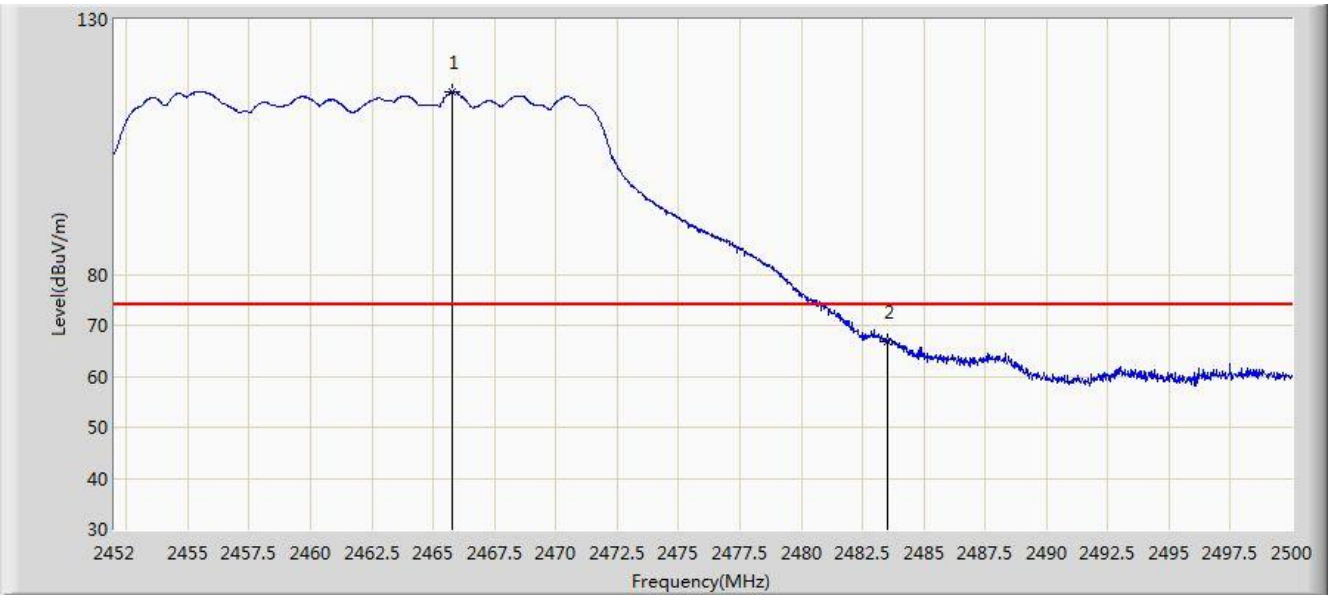

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.752	115.893	117.950	N/A	N/A	-2.057	PK
2			2483.500	66.922	68.908	-7.078	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2462MHz - Ant 0+1	

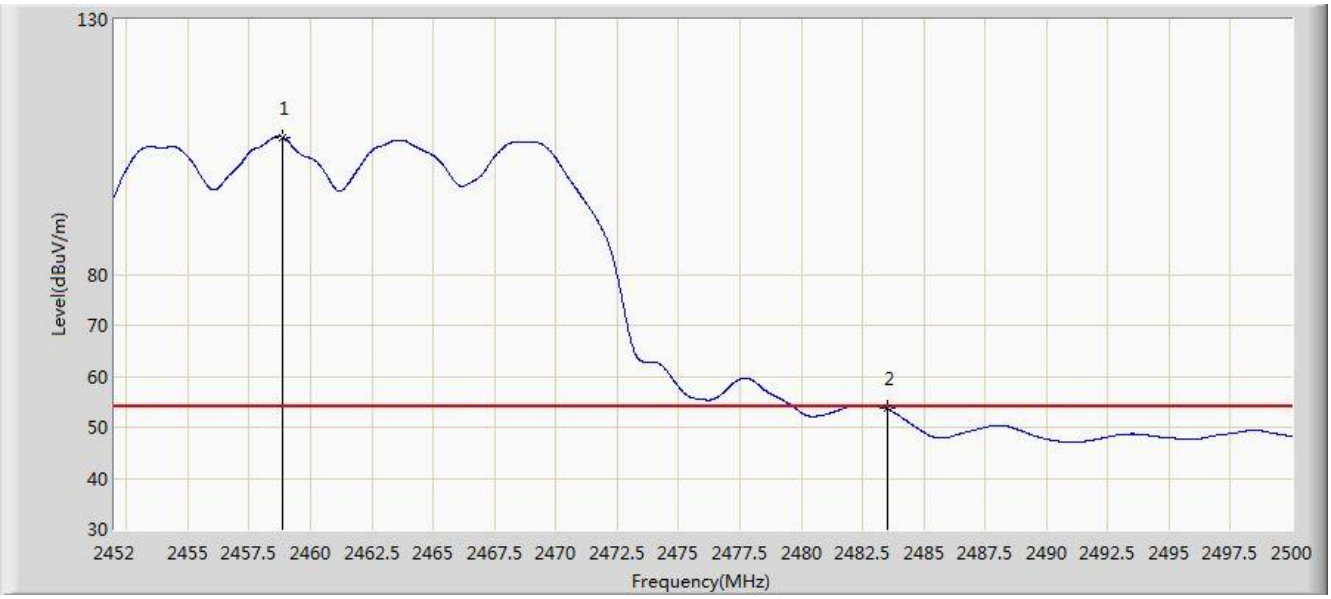

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.840	106.942	109.026	N/A	N/A	-2.083	AV
2			2483.500	53.688	55.674	-0.312	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2422MHz - Ant 0+1	

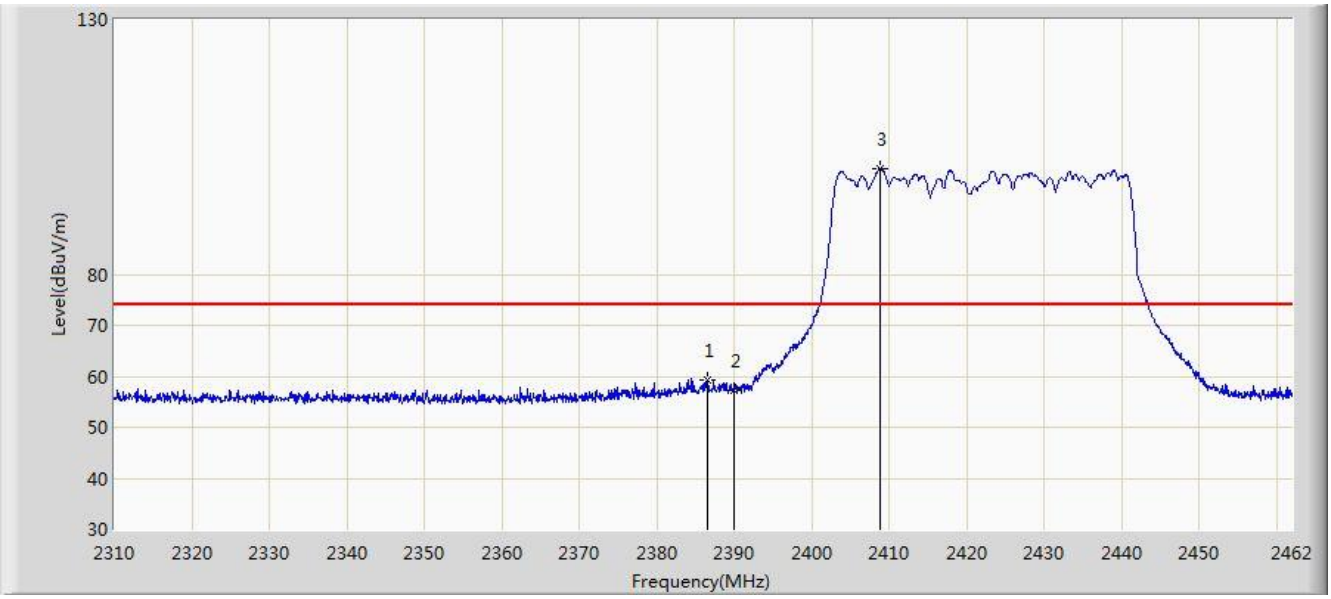

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.608	59.360	61.733	-14.640	74.000	-2.373	PK
2			2390.000	57.199	59.559	-16.801	74.000	-2.360	PK
3		*	2408.952	100.814	103.098	N/A	N/A	-2.285	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2422MHz - Ant 0+1	

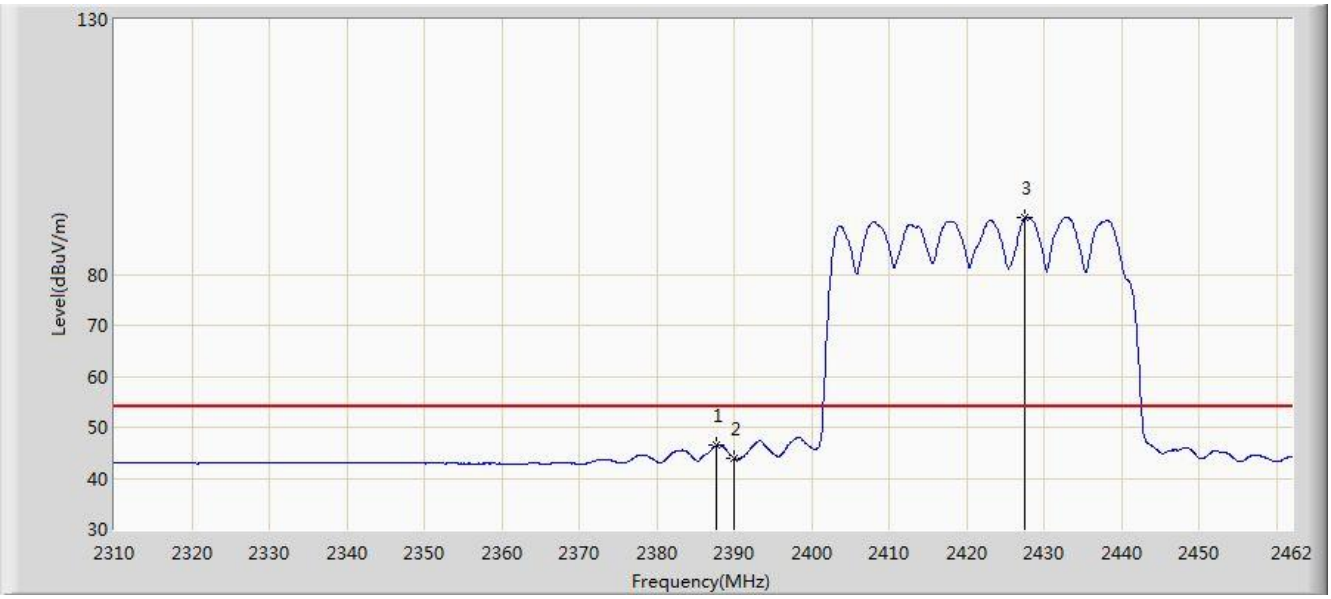

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.672	46.411	48.780	-7.589	54.000	-2.370	AV
2			2390.000	43.988	46.348	-10.012	54.000	-2.360	AV
3		*	2427.572	91.132	93.342	N/A	N/A	-2.210	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2422MHz - Ant 0+1	

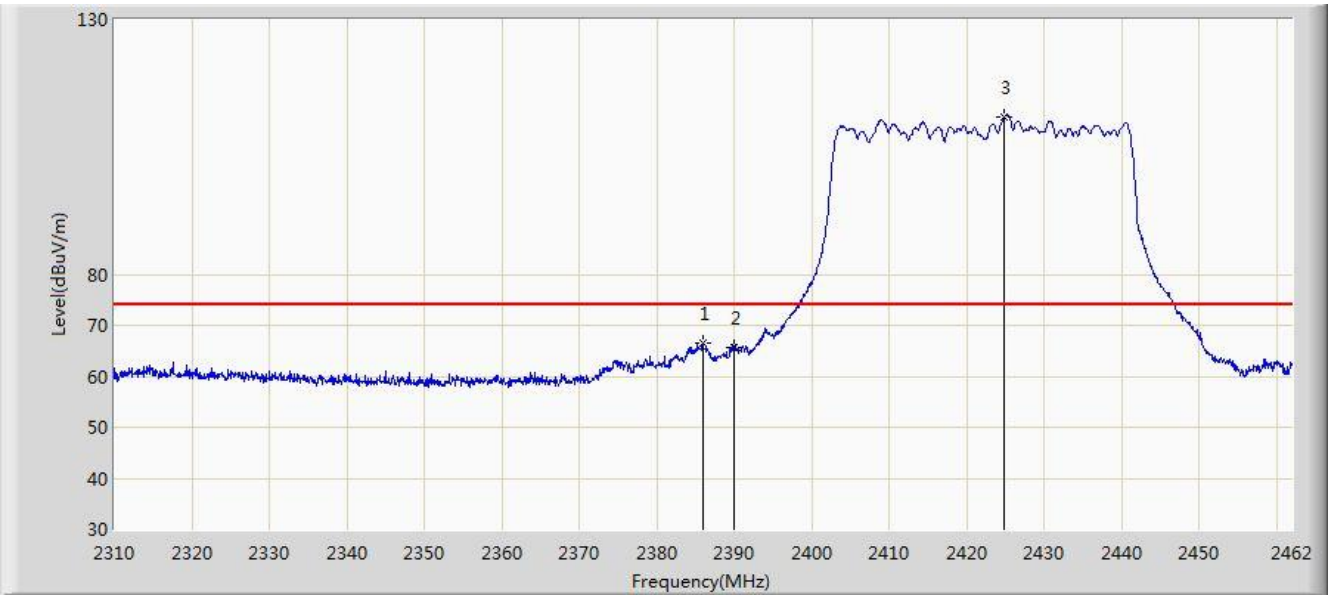

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.000	66.569	68.945	-7.431	74.000	-2.376	PK
2			2390.000	65.709	68.069	-8.291	74.000	-2.360	PK
3		*	2424.912	110.941	113.162	N/A	N/A	-2.220	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2422MHz - Ant 0+1	

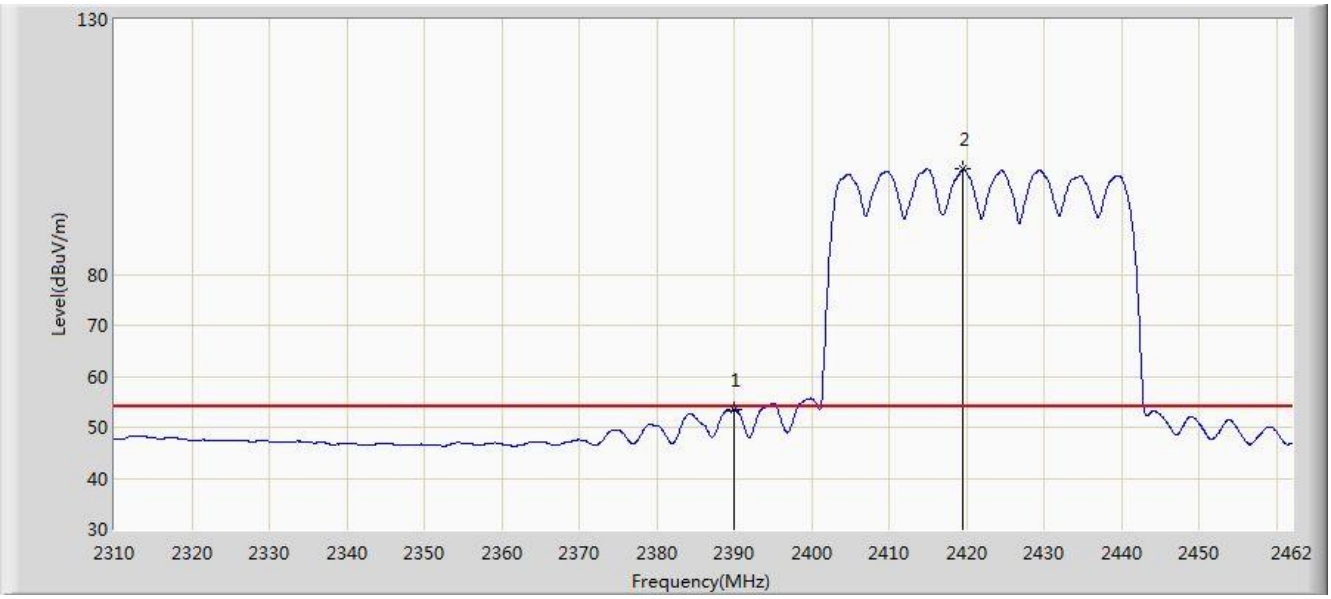

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.498	55.858	-0.502	54.000	-2.360	AV
2		*	2419.516	100.676	102.918	N/A	N/A	-2.242	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2427MHz - Ant 0+1	

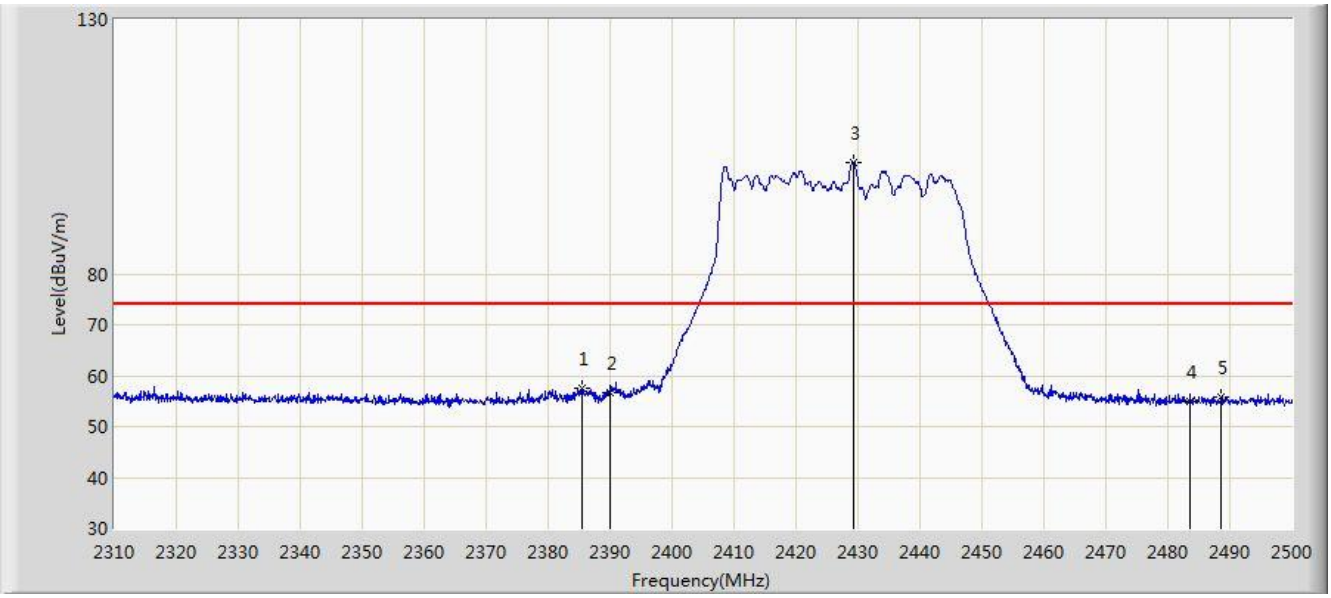

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.525	57.509	59.887	-16.491	74.000	-2.377	PK
2			2390.000	56.800	59.160	-17.200	74.000	-2.360	PK
3		*	2429.320	101.919	104.122	N/A	N/A	-2.203	PK
4			2483.500	55.016	57.002	-18.984	74.000	-1.986	PK
5			2488.600	55.746	57.712	-18.254	74.000	-1.966	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2427MHz - Ant 0+1	

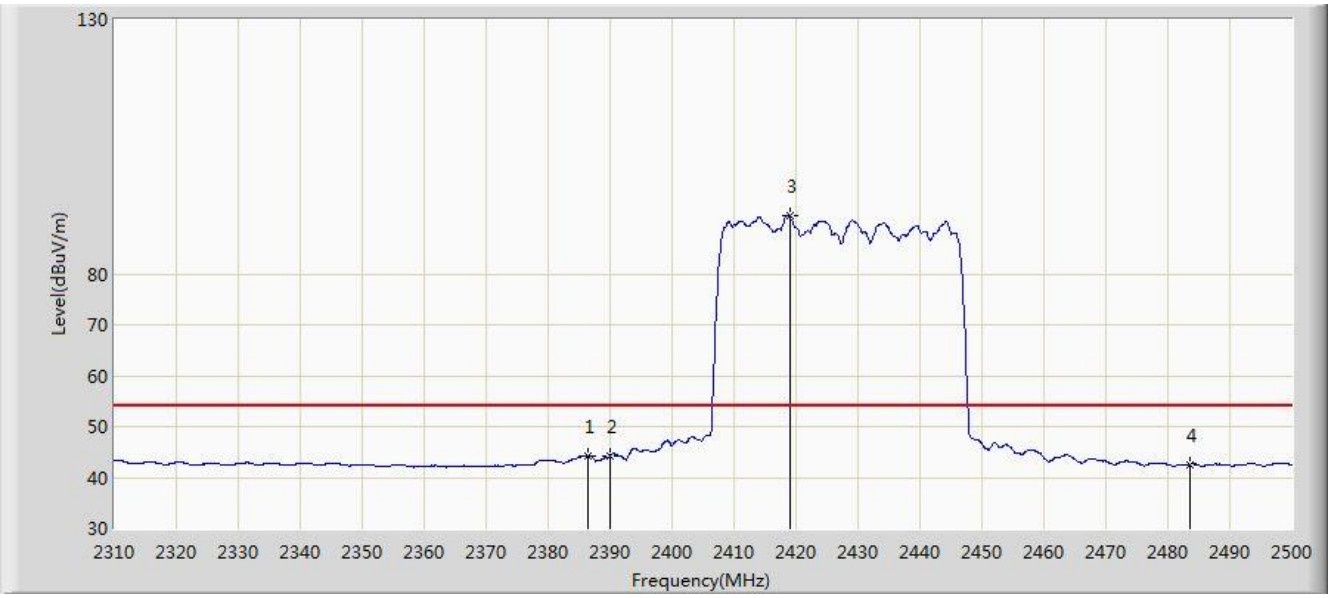

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.475	44.132	46.506	-9.868	54.000	-2.374	AV
2			2390.000	44.232	46.592	-9.768	54.000	-2.360	AV
3		*	2418.965	91.354	93.598	N/A	N/A	-2.244	AV
4			2483.500	42.552	44.538	-11.448	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2427MHz - Ant 0+1	

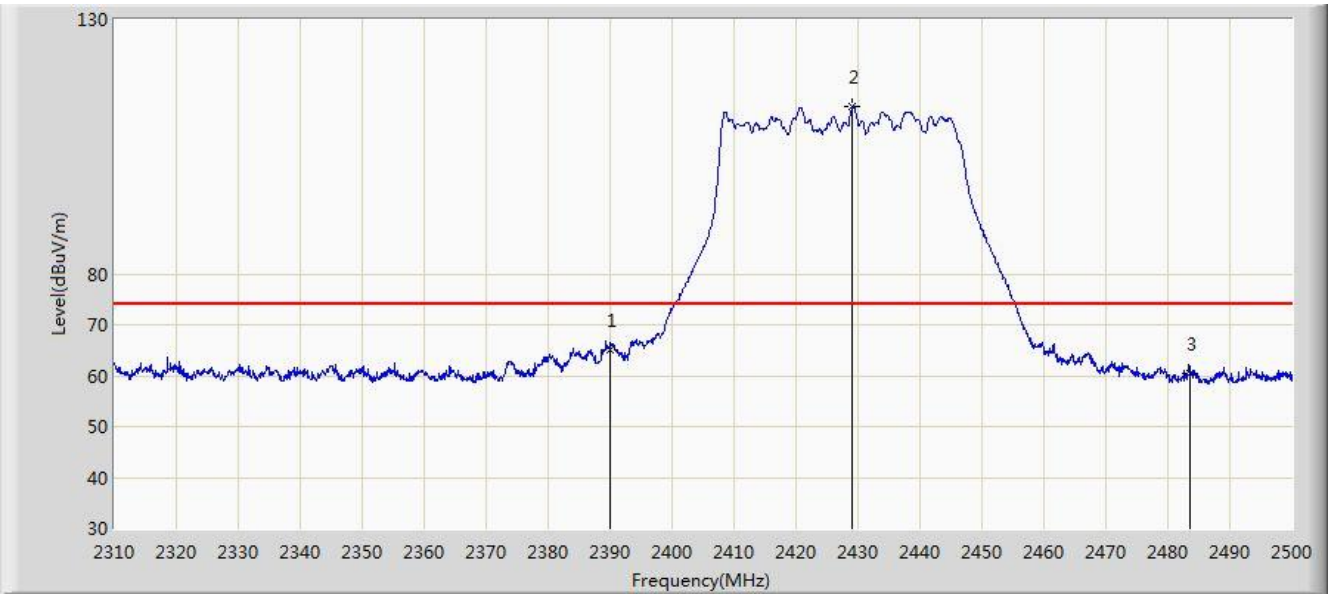

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	65.071	67.431	-8.929	74.000	-2.360	PK
2		*	2429.130	112.840	115.044	N/A	N/A	-2.204	PK
3			2483.500	60.311	62.297	-13.689	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2427MHz - Ant 0+1	

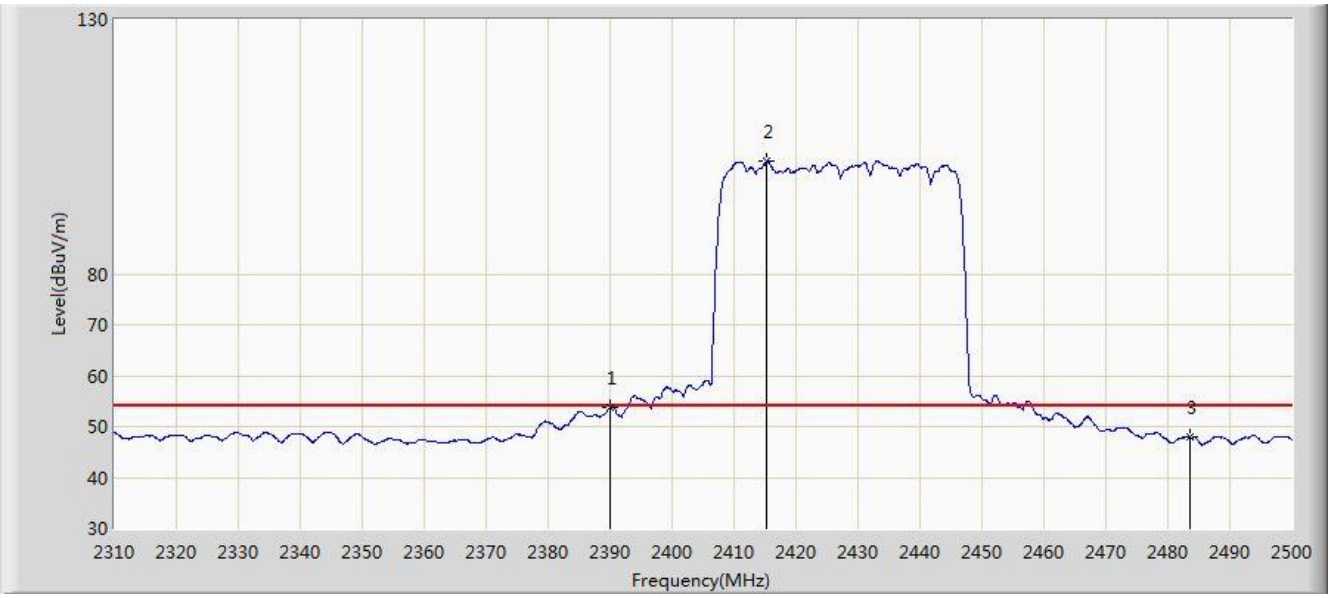

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.812	56.172	-0.188	54.000	-2.360	AV
2		*	2415.355	102.245	104.504	N/A	N/A	-2.259	AV
3			2483.500	47.894	49.880	-6.106	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2437MHz - Ant 0+1	

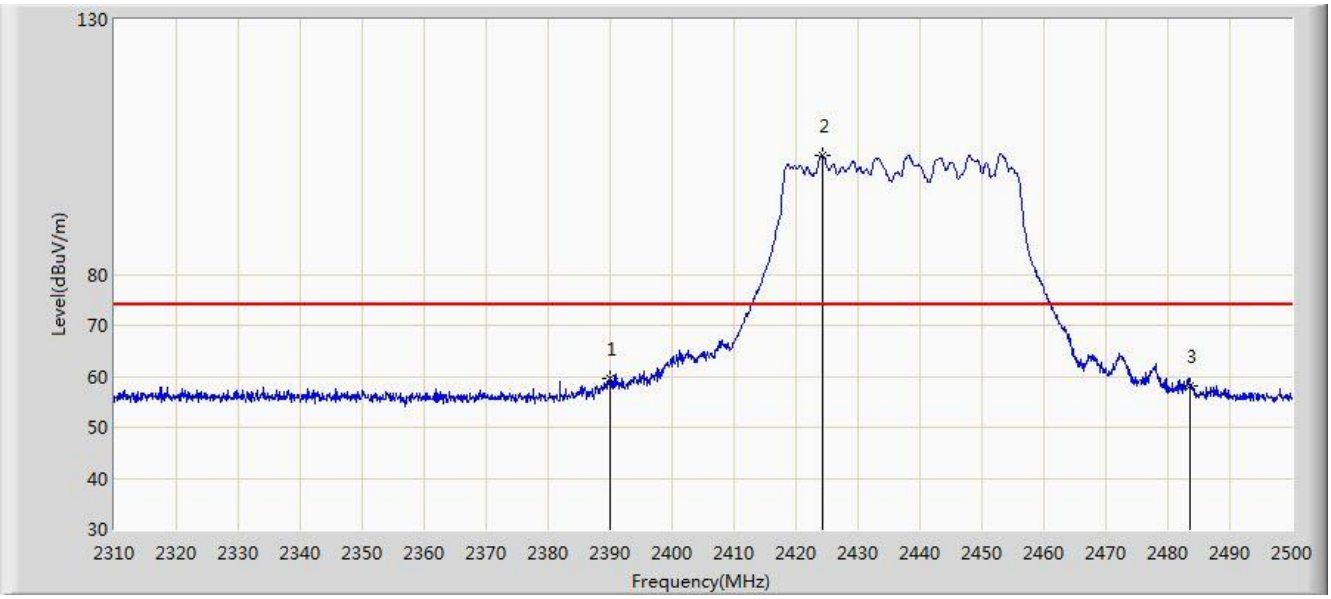

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	59.699	62.059	-14.301	74.000	-2.360	PK
2		*	2424.285	103.391	105.614	N/A	N/A	-2.223	PK
3			2483.500	58.245	60.231	-15.755	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2437MHz - Ant 0+1	

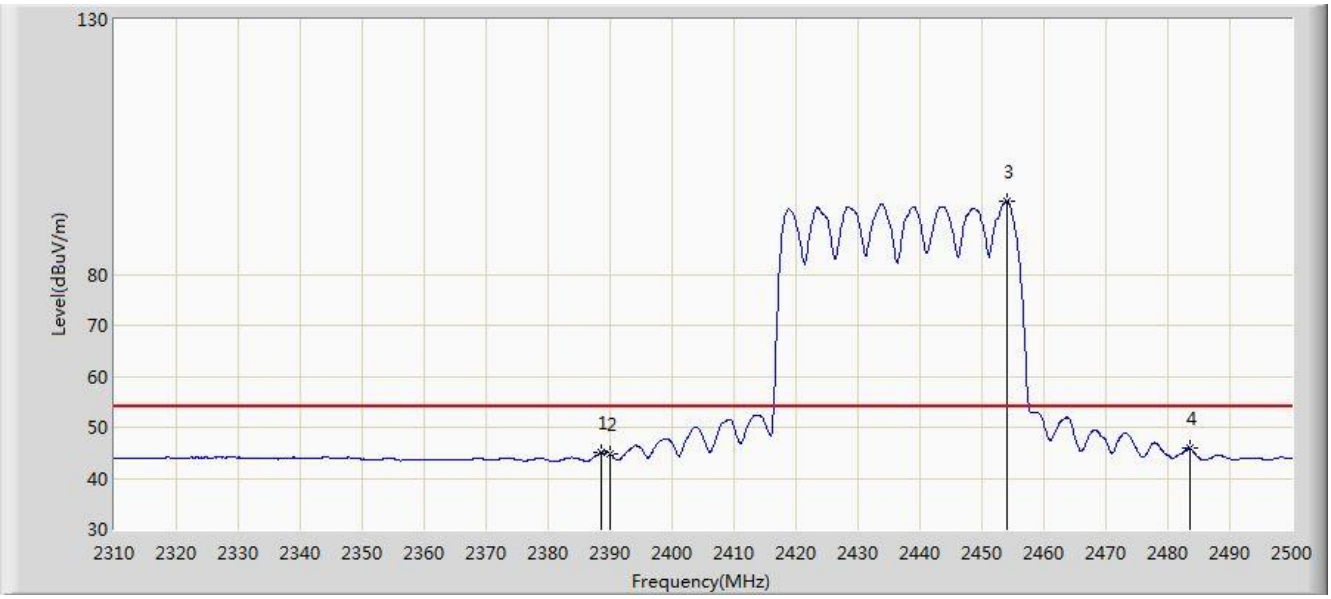

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.565	45.069	47.435	-8.931	54.000	-2.366	AV
2			2390.000	44.745	47.105	-9.255	54.000	-2.360	AV
3		*	2454.115	94.383	96.486	N/A	N/A	-2.104	AV
4			2483.500	45.855	47.841	-8.145	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2437MHz - Ant 0+1	

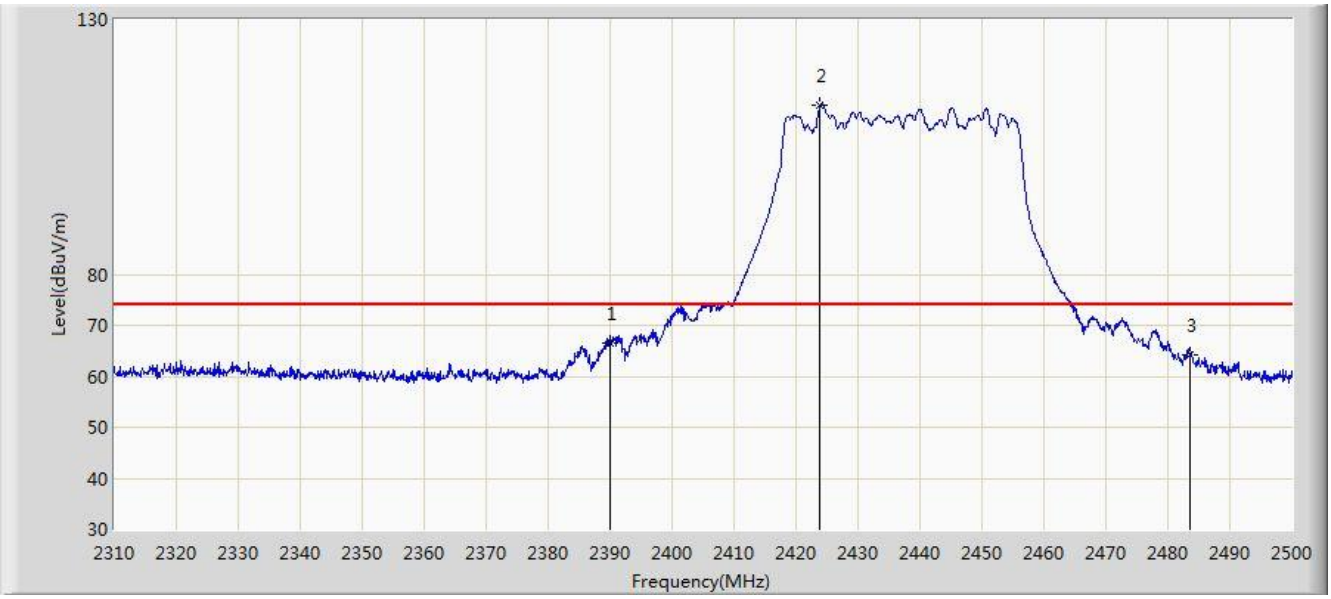

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	66.486	68.846	-7.514	74.000	-2.360	PK
2		*	2423.905	113.077	115.302	N/A	N/A	-2.224	PK
3			2483.500	64.306	66.292	-9.694	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2437MHz - Ant 0+1	

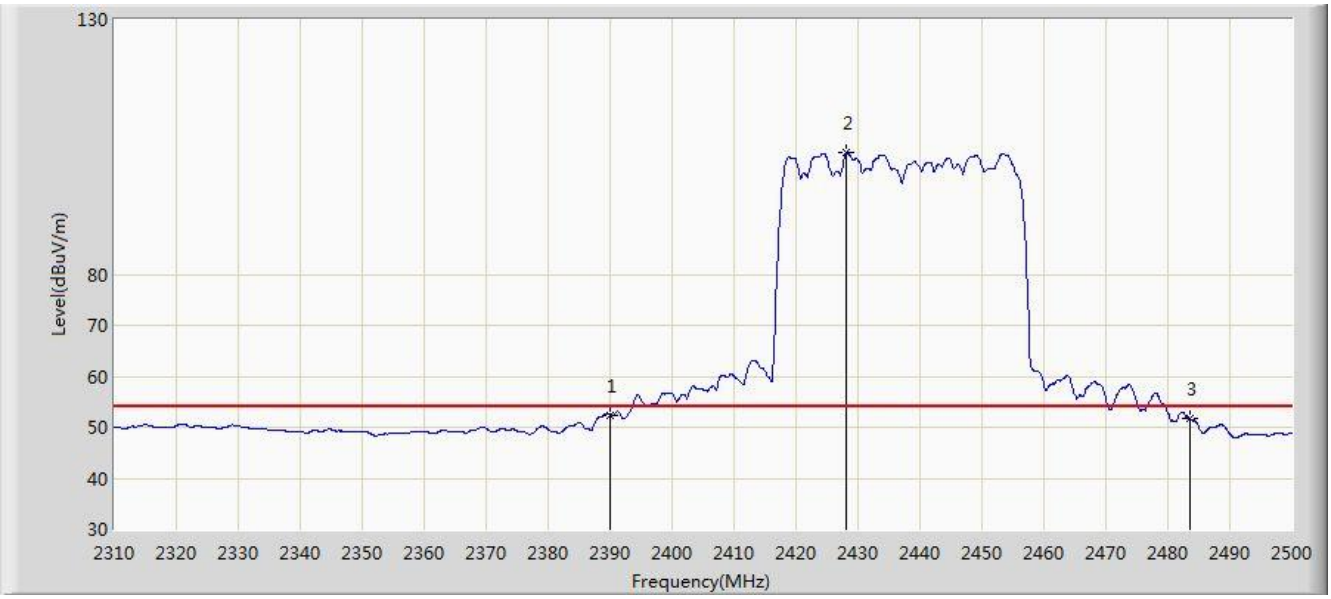

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.402	54.762	-1.598	54.000	-2.360	AV
2		*	2428.180	103.913	106.121	N/A	N/A	-2.207	AV
3			2483.500	51.648	53.634	-2.352	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2447MHz - Ant 0+1	

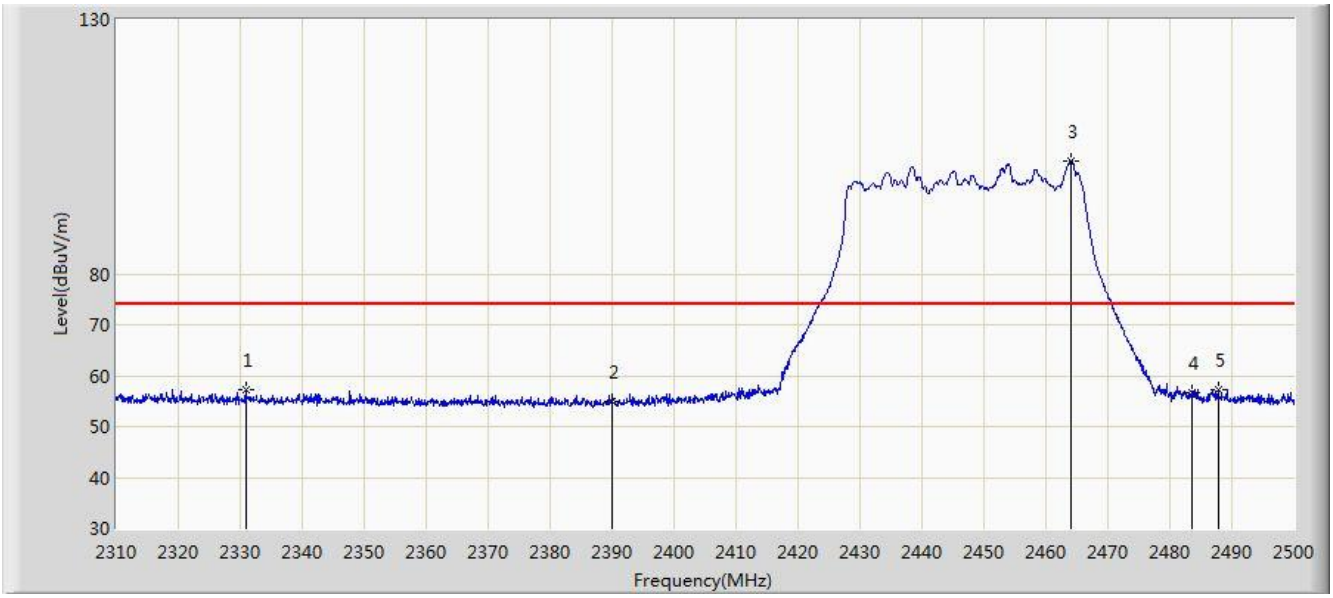

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2330.900	57.386	59.983	-16.614	74.000	-2.596	PK
2			2390.000	54.930	57.290	-19.070	74.000	-2.360	PK
3		*	2464.090	102.233	104.296	N/A	N/A	-2.063	PK
4			2483.500	56.641	58.627	-17.359	74.000	-1.986	PK
5			2487.745	57.368	59.337	-16.632	74.000	-1.970	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2447MHz - Ant 0+1	

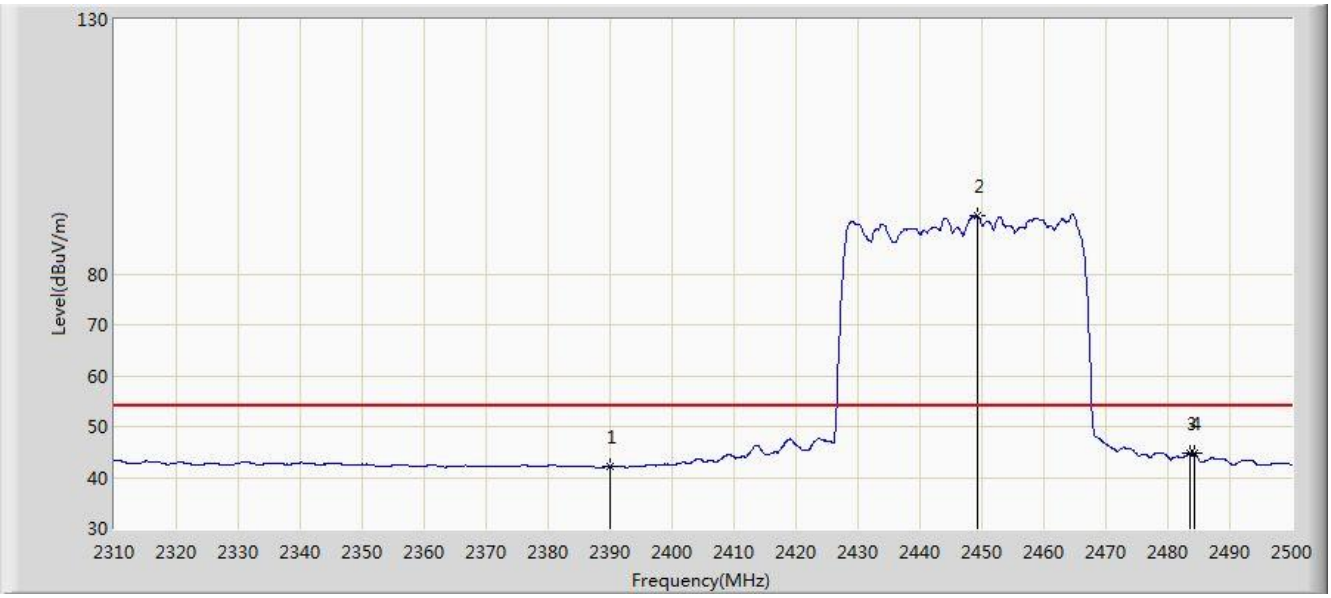

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	42.138	44.498	-11.862	54.000	-2.360	AV
2		*	2449.365	91.404	93.526	N/A	N/A	-2.122	AV
3			2483.500	44.664	46.650	-9.336	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2447MHz - Ant 0+1	

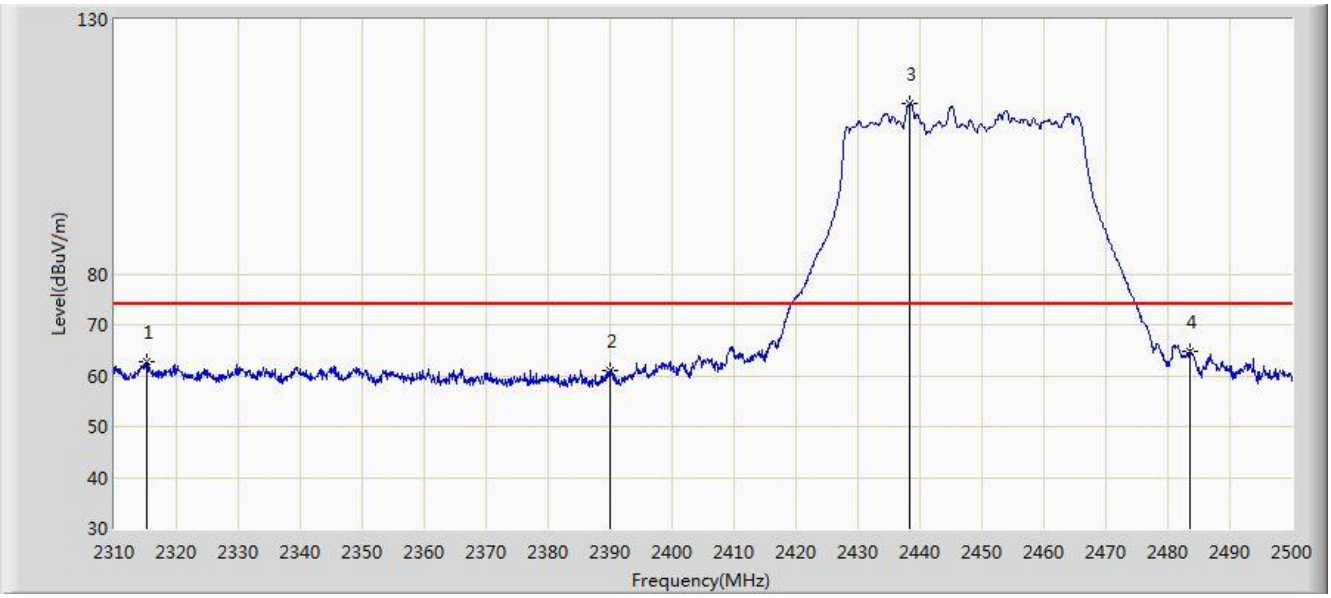

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2315.130	62.689	65.349	-11.311	74.000	-2.660	PK
2			2390.000	60.883	63.243	-13.117	74.000	-2.360	PK
3		*	2438.440	113.449	115.615	N/A	N/A	-2.167	PK
4			2483.500	64.690	66.676	-9.310	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 21:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2447MHz - Ant 0+1	

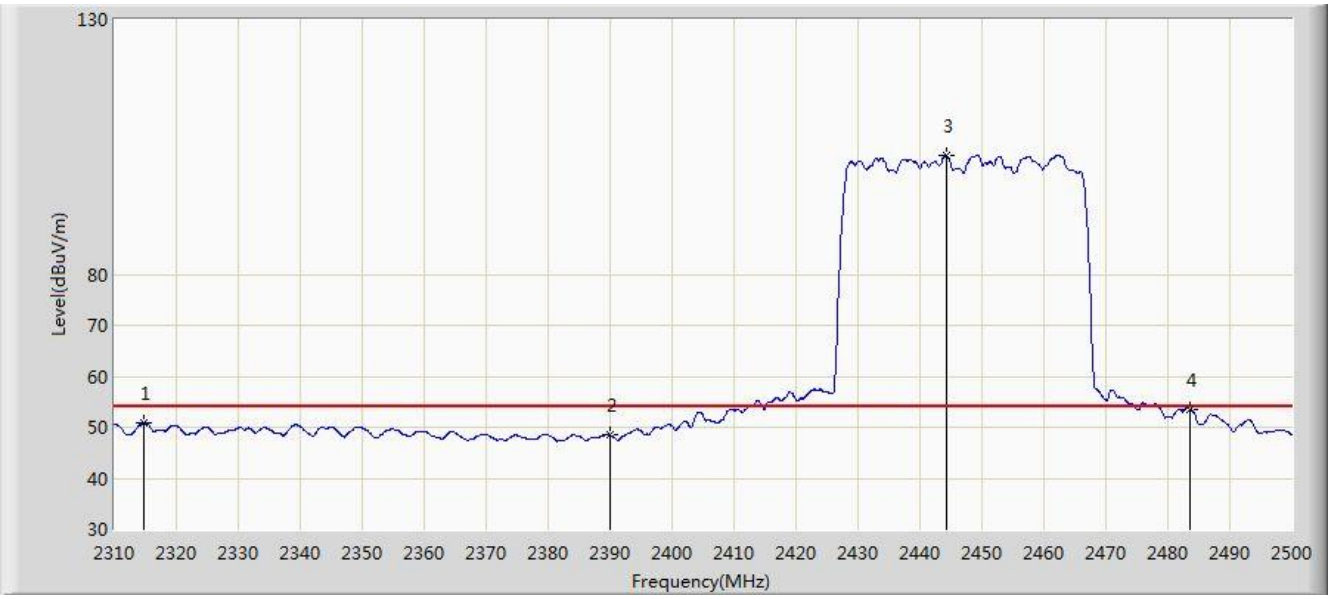

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2314.655	51.011	53.673	-2.989	54.000	-2.662	AV
2			2390.000	48.416	50.776	-5.584	54.000	-2.360	AV
3		*	2444.330	103.233	105.375	N/A	N/A	-2.142	AV
4			2483.500	53.549	55.535	-0.451	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/24 - 18:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2452MHz - Ant 0+1	

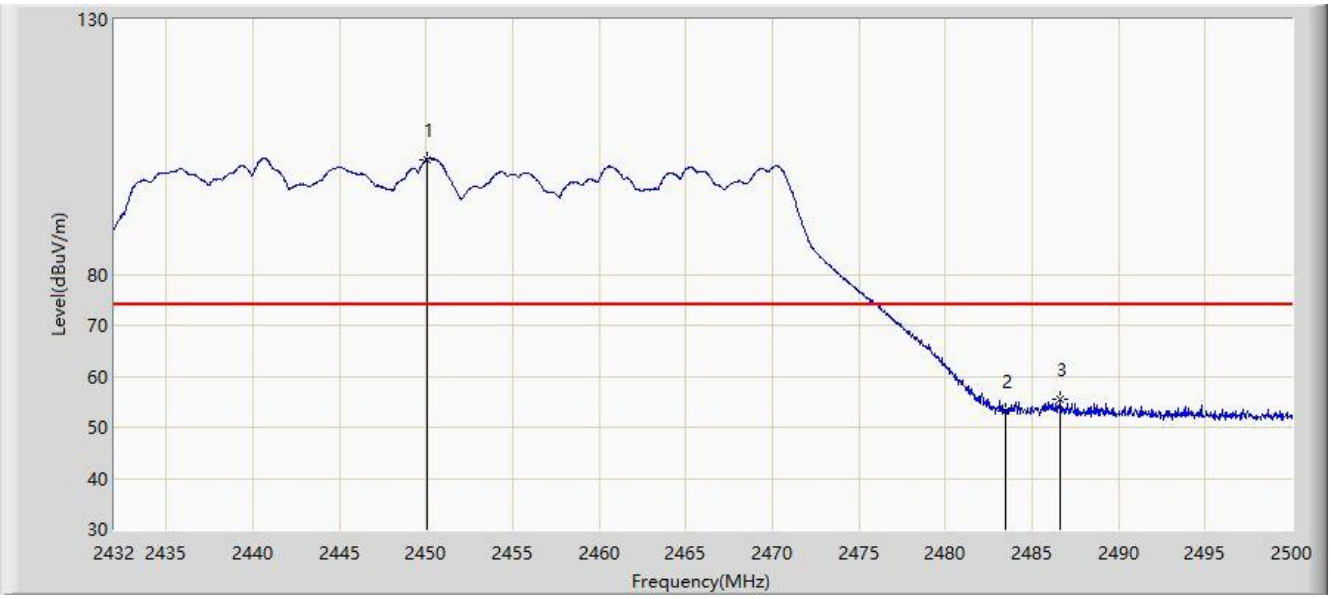

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.054	102.591	104.710	N/A	N/A	-2.120	PK
2			2483.500	53.213	55.199	-20.787	74.000	-1.986	PK
3			2486.638	55.421	57.394	-18.579	74.000	-1.973	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/24 - 18:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2452MHz - Ant 0+1	

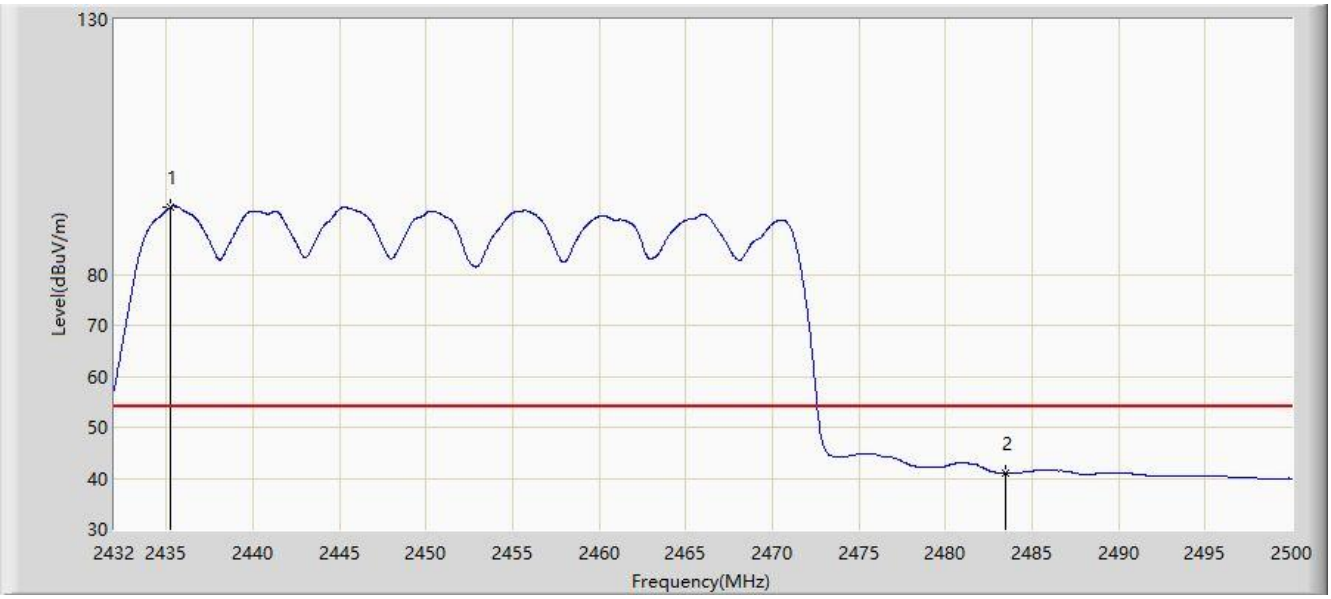

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2435.264	93.212	95.391	N/A	N/A	-2.179	AV
2			2483.500	41.052	43.038	-12.948	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/24 - 18:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2452MHz - Ant 0+1	

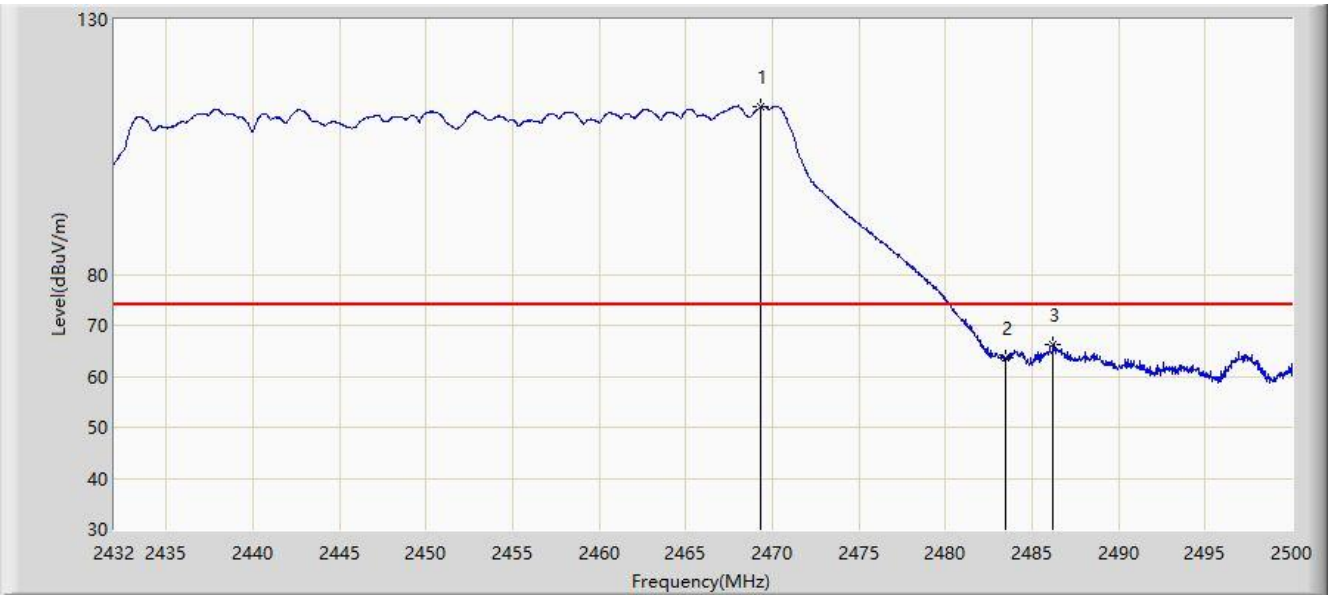

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.332	112.875	114.918	N/A	N/A	-2.043	PK
2			2483.500	63.555	65.541	-10.445	74.000	-1.986	PK
3			2486.196	66.276	68.251	-7.724	74.000	-1.974	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/24 - 18:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2452MHz - Ant 0+1	

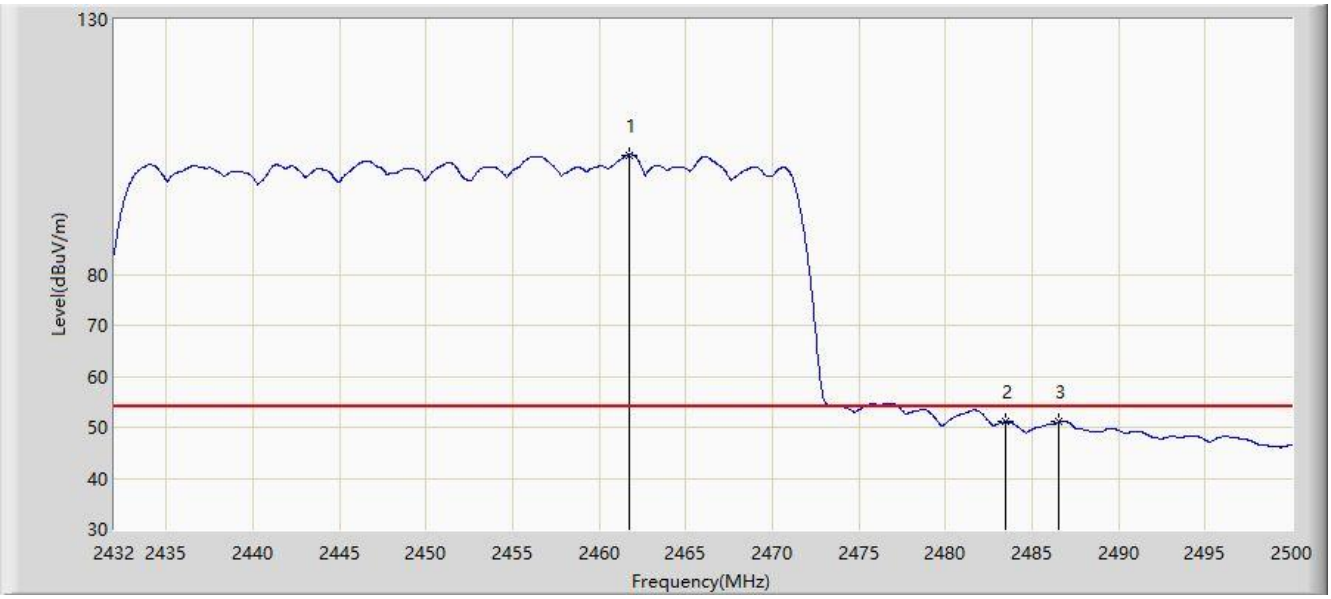

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.716	103.456	105.529	N/A	N/A	-2.073	AV
2			2483.500	51.065	53.051	-2.935	54.000	-1.986	AV
3			2486.536	51.023	52.997	-2.977	54.000	-1.973	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

5.7. 佔用頻道寬度

5.7.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(A)節之要求，6dB 頻寬至少應有 500kHz。

5.7.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端，設定頻譜分析儀之解析度頻寬為 100kHz，視訊頻寬不小於解析度頻寬，頻率掃瞄範圍(SPAN)遠大於解析度頻寬。
待測物應在正常發射狀態下量測。

5.7.3. 測試架構圖

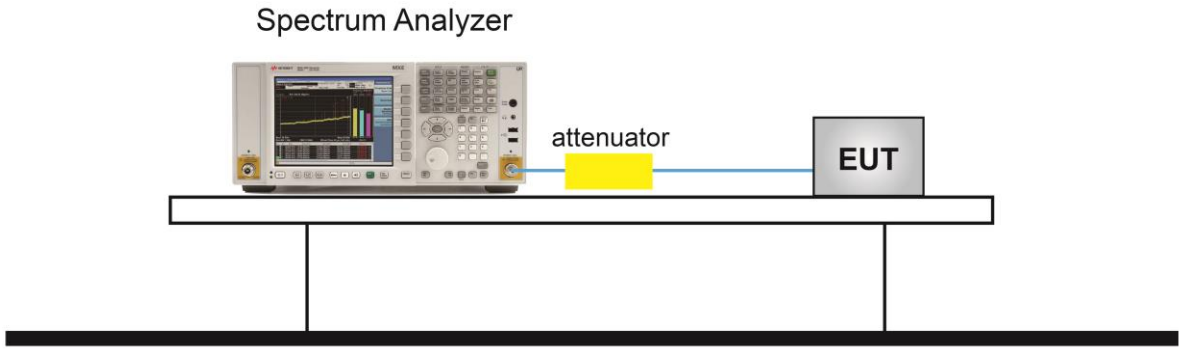

5.7.4. 佔用頻帶寬度測試結果

待測物名稱	AX3000 Gigabit Wi-Fi 6 路由器	溫度	23 ~ 25℃
測試工程師	Kevin Ker	濕度	46 ~ 54%
測試場地	SR2	測試日期	2019/05/15 ~ 2019/05/24

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1Mbps	01	2412	8.11	≥ 0.5	Pass
802.11b	1Mbps	06	2437	8.11	≥ 0.5	Pass
802.11b	1Mbps	11	2462	8.11	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.61	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.60	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.60	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	17.87	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.85	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.87	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	36.60	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	36.60	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	36.61	≥ 0.5	Pass
802.11ax-HE20	MCS0	01	2412	19.11	≥ 0.5	Pass
802.11ax-HE20	MCS0	06	2437	19.07	≥ 0.5	Pass
802.11ax-HE20	MCS0	11	2462	19.10	≥ 0.5	Pass
802.11ax-HE40	MCS0	03	2422	38.59	≥ 0.5	Pass
802.11ax-HE40	MCS0	06	2437	38.11	≥ 0.5	Pass
802.11ax-HE40	MCS0	09	2452	38.22	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 0	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
Channel 11 (2462MHz)	

802.11g 6dB Bandwidth - Ant 0 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
	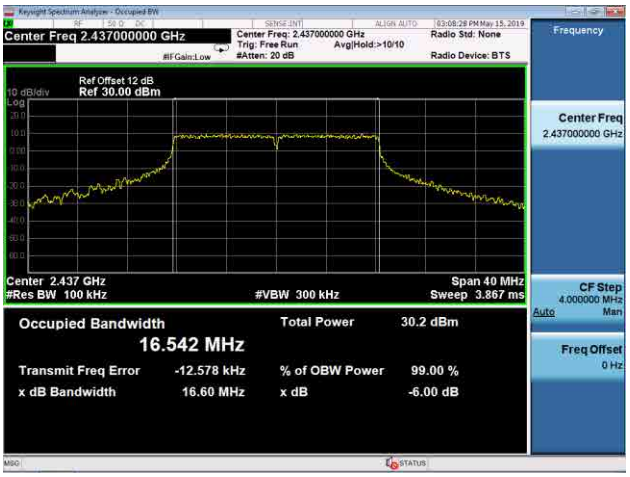
Channel 11 (2462MHz)	
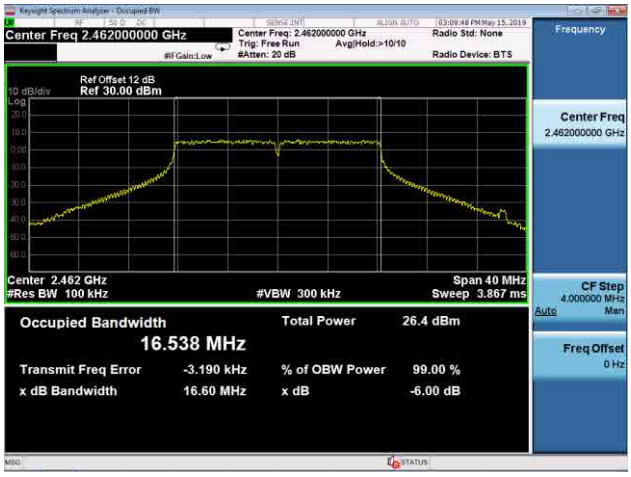	

802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
Channel 11 (2462MHz)	

802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1	
Channel 03 (2422MHz)	Channel 06 (2437MHz)
Channel 09 (2452MHz)	

802.11ax-HE20 6dB Bandwidth - Ant 0 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
Channel 11 (2462MHz)	

802.11ax-HE40 6dB Bandwidth - Ant 0 / Ant 0 + 1	
Channel 03 (2422MHz)	Channel 06 (2437MHz)
Channel 09 (2452MHz)	
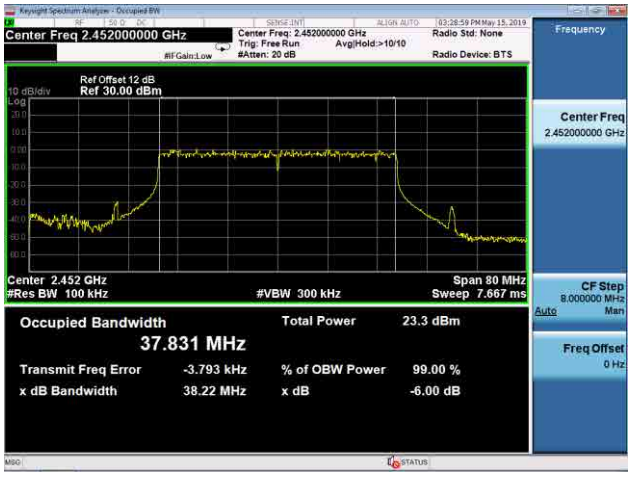	

5.8. 發射電功率密度

5.8.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(B)節，在使用頻率範圍之任意 3 千赫(kHz)頻寬內，由發射機傳導至天線之峰值發射電功率密度在任意期間內，皆不得大於 8dBm。

5.8.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端。找出發射峰值並擴展於通帶內，設定頻譜分析儀之解析度頻寬為 3kHz，視訊頻寬大於解析度頻寬，掃瞄時間為頻率掃瞄範圍除以 3kHz。(SWEEP TIME＝SPAN/3kHz)。
待測物應在正常發射狀態下量測。

5.8.3. 測試架構圖

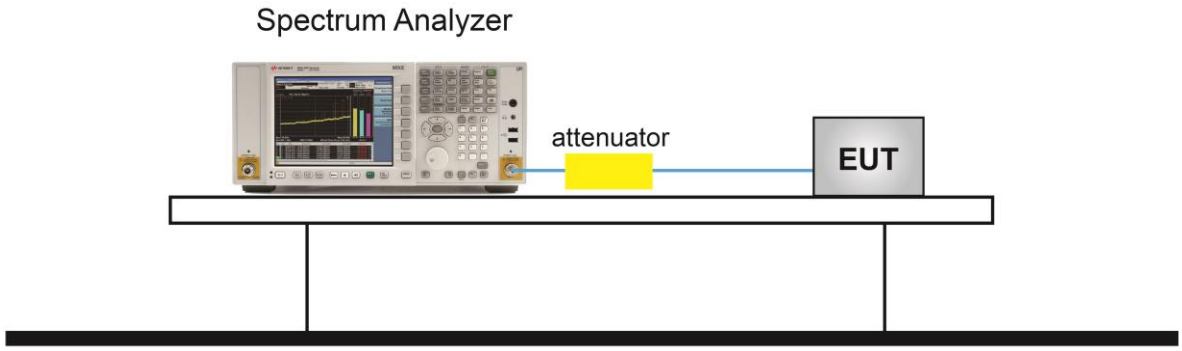

5.8.4. 功率密度量測結果

待測物名稱	AX3000 Gigabit Wi-Fi 6 路由器	溫度	23 ~ 25℃
測試工程師	Kevin Ker	濕度	46 ~ 54%
測試場地	SR1	測試日期	2019/05/15 ~ 2019/05/24
測試項目	Power Spectral Density		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/ 10kHz)	Ant 1 PSD (dBm/ 10kHz)	Duty Cycle (%)	Constant Factor (dBm)	Total PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Result
802.11b	1Mbps	01	2412	0.67	--	99.76	-5.23	-4.56	≤ 8.00	Pass
802.11b	1Mbps	06	2437	0.50	--	99.76	-5.23	-4.73	≤ 8.00	Pass
802.11b	1Mbps	11	2462	0.71	--	99.76	-5.23	-4.52	≤ 8.00	Pass
802.11g	6Mbps	01	2412	-9.19	-9.05	100.00	-5.23	-11.34	≤ 8.00	Pass
802.11g	6Mbps	06	2437	-5.56	-6.06	100.00	-5.23	-8.02	≤ 8.00	Pass
802.11g	6Mbps	11	2462	-8.79	-9.16	100.00	-5.23	-11.19	≤ 8.00	Pass
802.11n-HT20	MCS0	01	2412	-11.28	-10.69	100.00	-5.23	-13.19	≤ 8.00	Pass
802.11n-HT20	MCS0	06	2437	-5.98	-4.83	100.00	-5.23	-7.59	≤ 8.00	Pass
802.11n-HT20	MCS0	11	2462	-10.07	-9.39	100.00	-5.23	-11.94	≤ 8.00	Pass
802.11n-HT40	MCS0	03	2422	-16.95	-12.38	100.00	-5.23	-16.31	≤ 8.00	Pass
802.11n-HT40	MCS0	06	2437	-13.35	-13.80	100.00	-5.23	-15.79	≤ 8.00	Pass
802.11n-HT40	MCS0	09	2452	-12.77	-14.57	100.00	-5.23	-15.80	≤ 8.00	Pass
802.11ax-HE20	MCS0	01	2412	-7.25	-5.56	100.00	-5.23	-8.54	≤ 8.00	Pass
802.11ax-HE20	MCS0	06	2437	1.71	1.68	100.00	-5.23	-0.52	≤ 8.00	Pass
802.11ax-HE20	MCS0	11	2462	-1.01	-1.35	100.00	-5.23	-3.40	≤ 8.00	Pass
802.11ax-HE40	MCS0	03	2422	-6.91	-6.46	100.00	-5.23	-8.90	≤ 8.00	Pass
802.11ax-HE40	MCS0	06	2437	-4.69	-3.12	100.00	-5.23	-6.05	≤ 8.00	Pass
802.11ax-HE40	MCS0	09	2452	-6.70	-6.09	100.00	-5.23	-8.60	≤ 8.00	Pass

Note: For 802.11b

When EUT duty cycle ≥ 98%, Total AVGPSD = Ant 0 AVGPSD (dBm/10kHz) + Constant Factor (dB).

For 802.11n/ax

When EUT duty cycle ≥ 98%, Total AVGPSD = $10*\log\{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$ + Constant Factor (dB).

待測物名稱	AX3000 Gigabit Wi-Fi 6 路由器	溫度	23 ~ 25℃
測試工程師	Kevin Ker	濕度	46 ~ 54%
測試場地	SR1	測試日期	2019/05/15 ~ 2019/05/24

802.11b AVGPSD - Ant 0	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
Channel 11 (2462MHz)	

802.11g AVGPSD - Ant 0 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
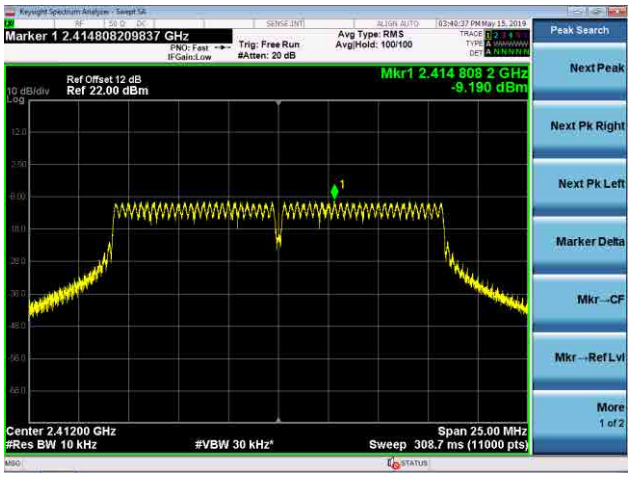	
Channel 11 (2462MHz)	
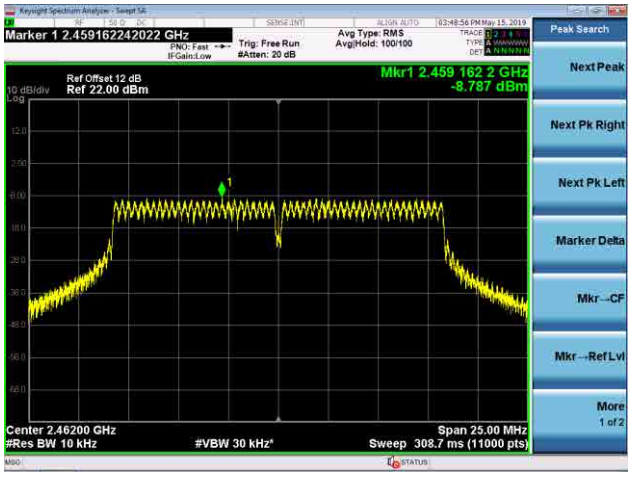	

802.11n-HT20 AVGPSD - Ant 0 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
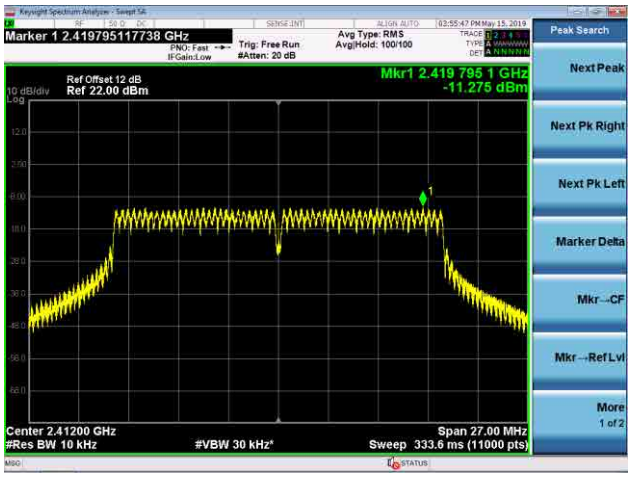	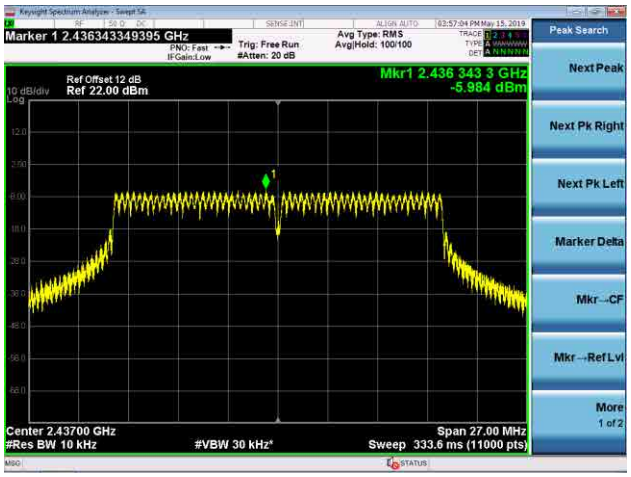
Channel 11 (2462MHz)	
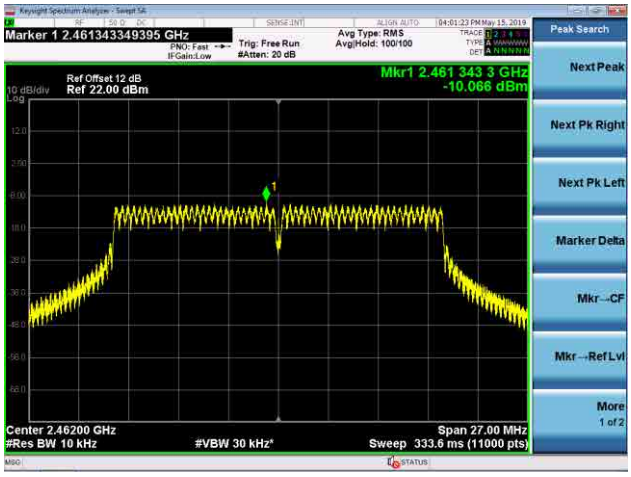	

802.11n-HT40 AVGPSD - Ant 0 / Ant 0 + 1	
Channel 03 (2422MHz)	Channel 06 (2437MHz)
Channel 09 (2452MHz)	
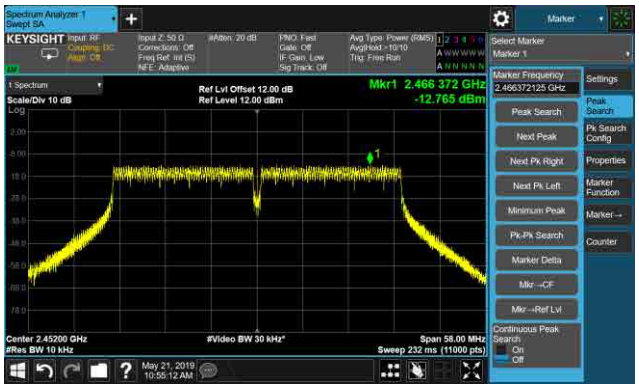	

802.11ax-HE20 AVGPSD - Ant 0 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
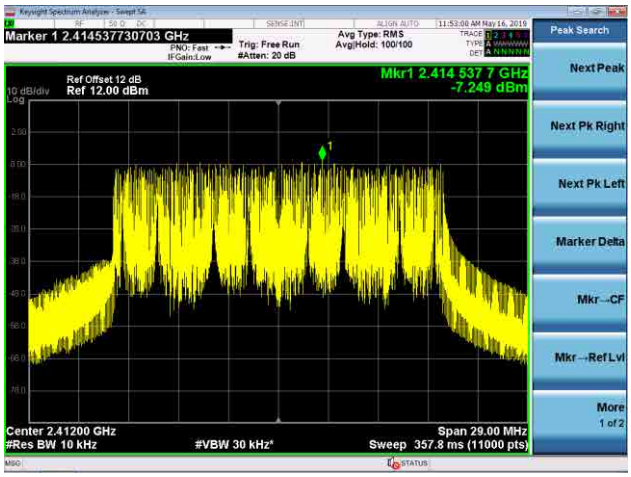	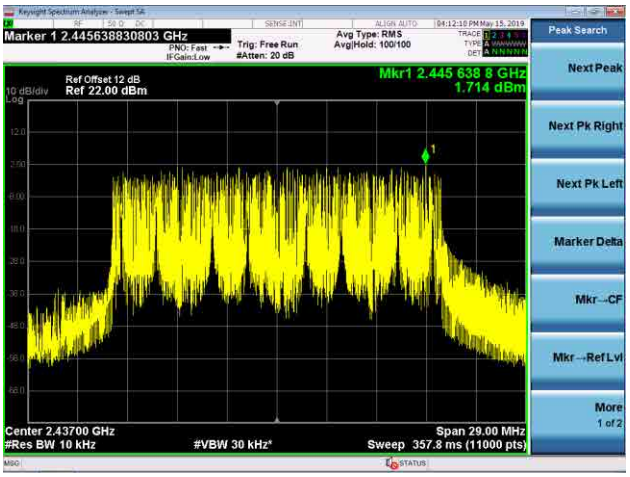
Channel 11 (2462MHz)	
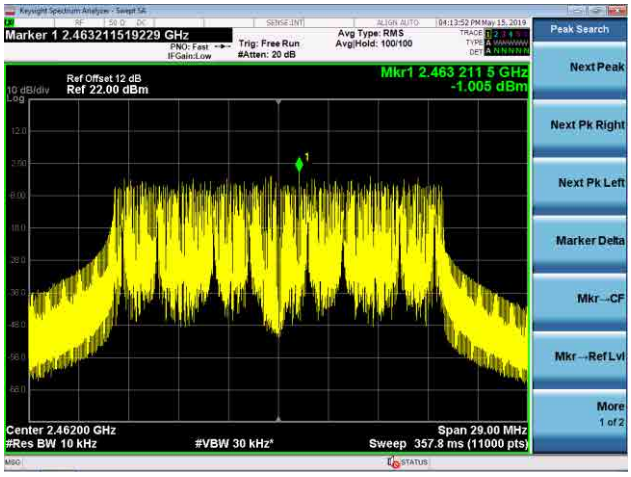	

802.11ax-HE40 AVGPSD - Ant 0 / Ant 0 + 1	
Channel 03 (2422MHz)	Channel 06 (2437MHz)
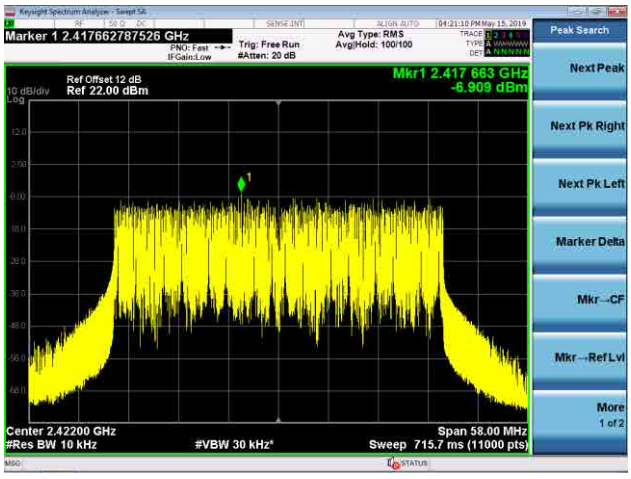	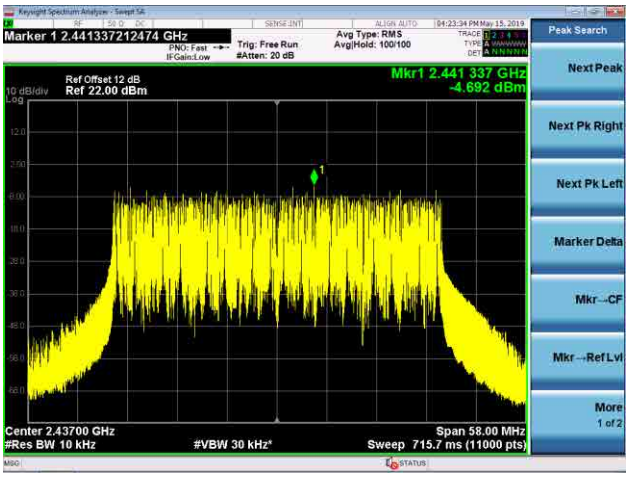
Channel 09 (2452MHz)	
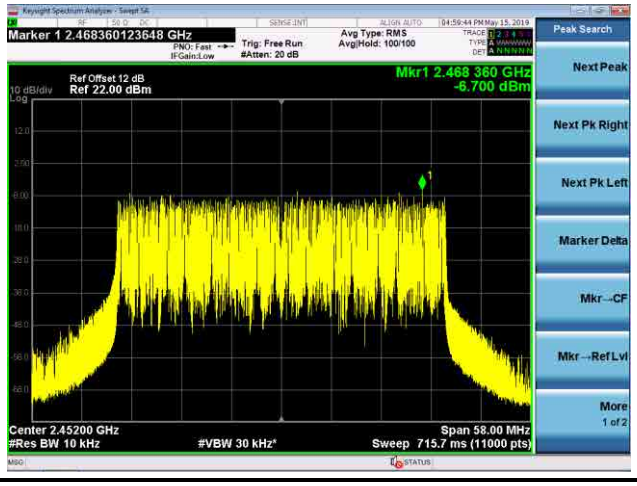	

802.11g AVGPSD - Ant 1 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
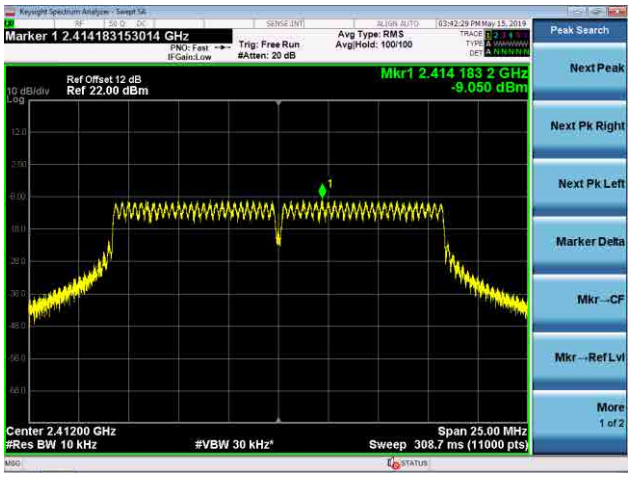	
Channel 11 (2462MHz)	
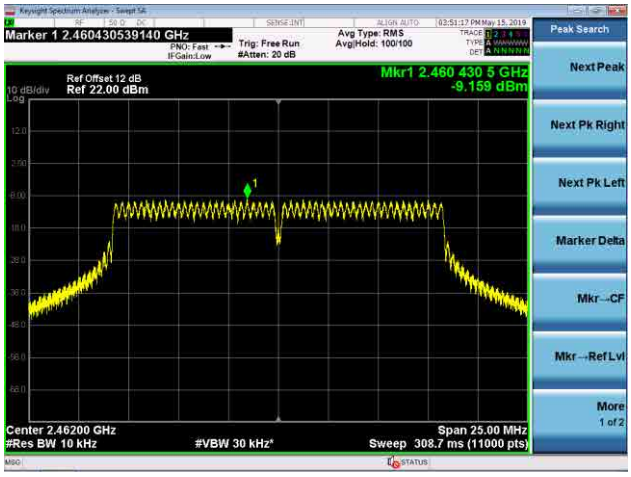	

802.11n-HT20 AVGPSD - Ant 1 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
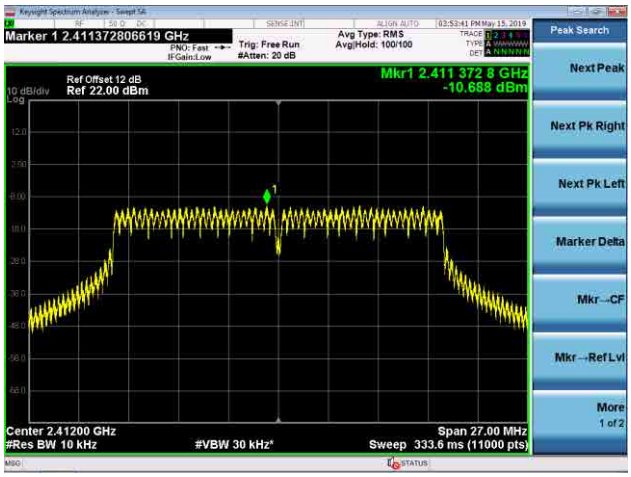	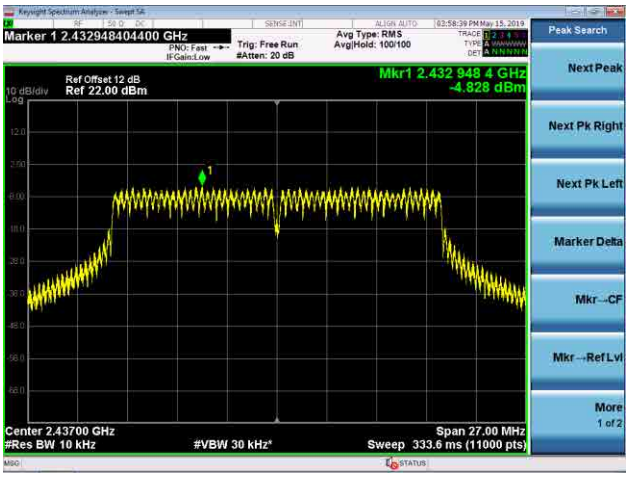
Channel 11 (2462MHz)	
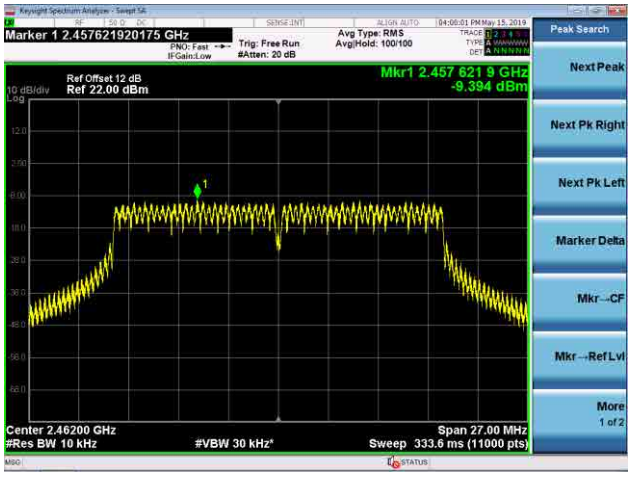	

802.11n-HT40 AVGPSD - Ant 1 / Ant 0 + 1	
Channel 03 (2422MHz)	Channel 06 (2437MHz)
Channel 09 (2452MHz)	
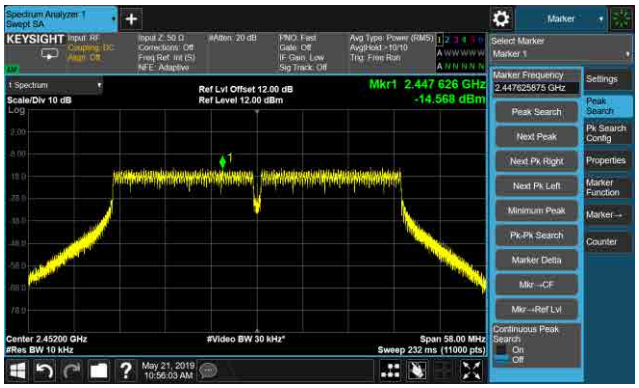	

802.11ax-HE20 AVGPSD - Ant 1 / Ant 0 + 1	
Channel 01 (2412MHz)	Channel 06 (2437MHz)
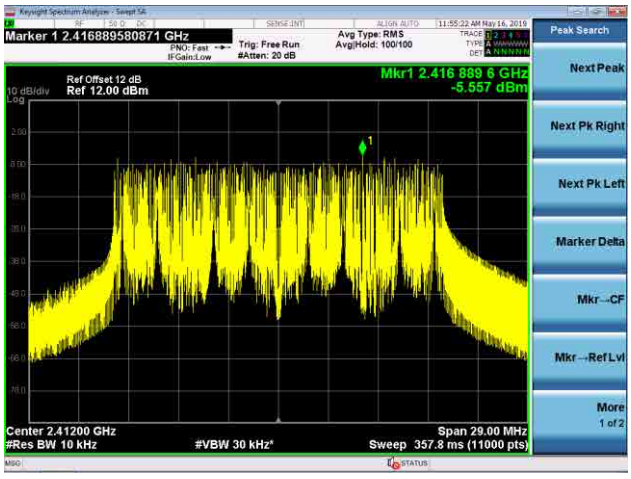	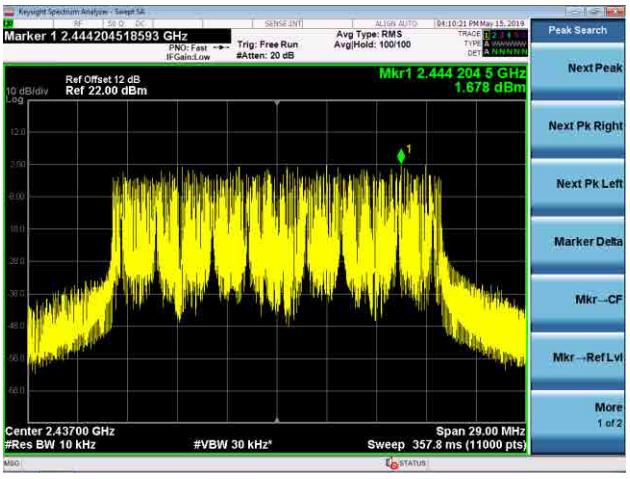
Channel 11 (2462MHz)	
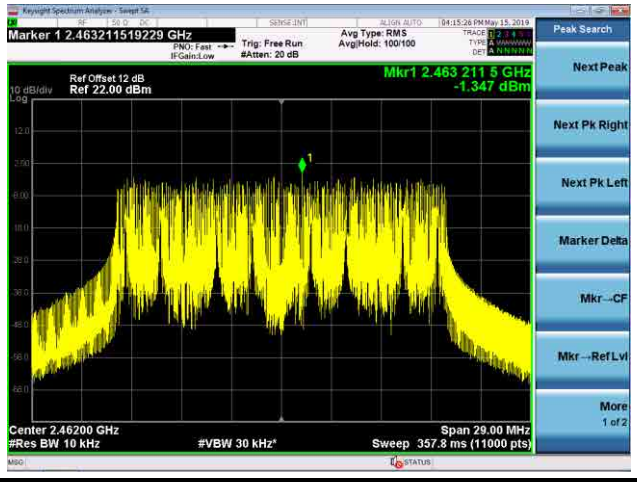	

802.11ax-HE40 AVGPSD - Ant 1 / Ant 0 + 1	
Channel 03 (2422MHz)	Channel 06 (2437MHz)
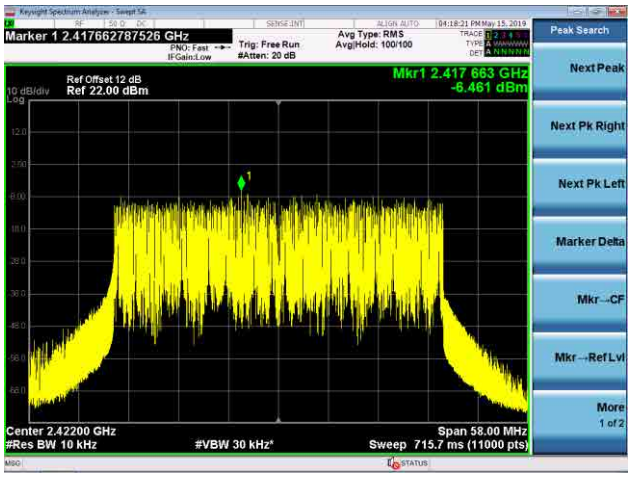	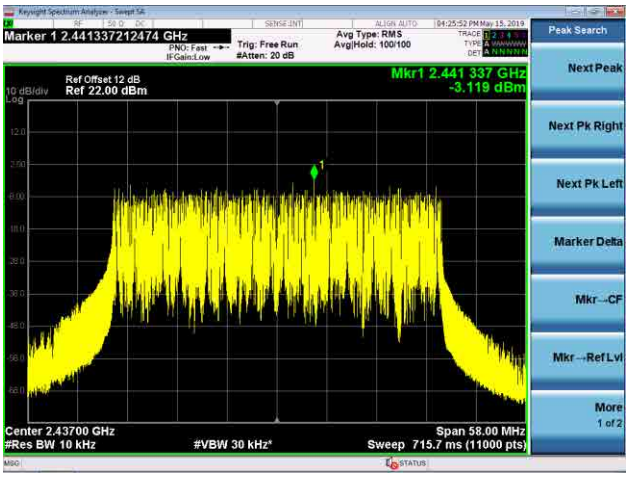
Channel 09 (2452MHz)	
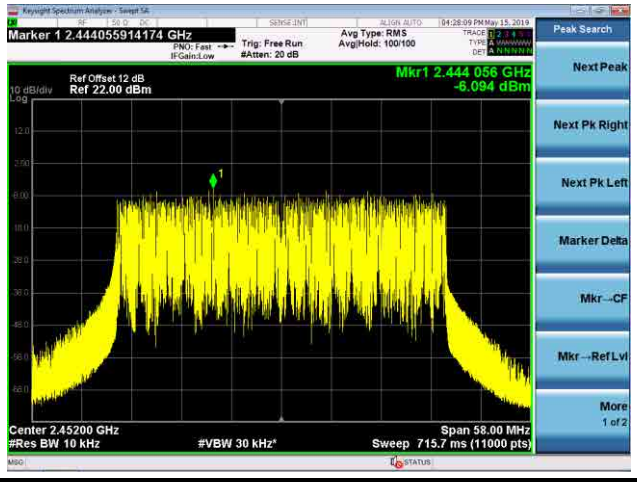	

The End