


測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

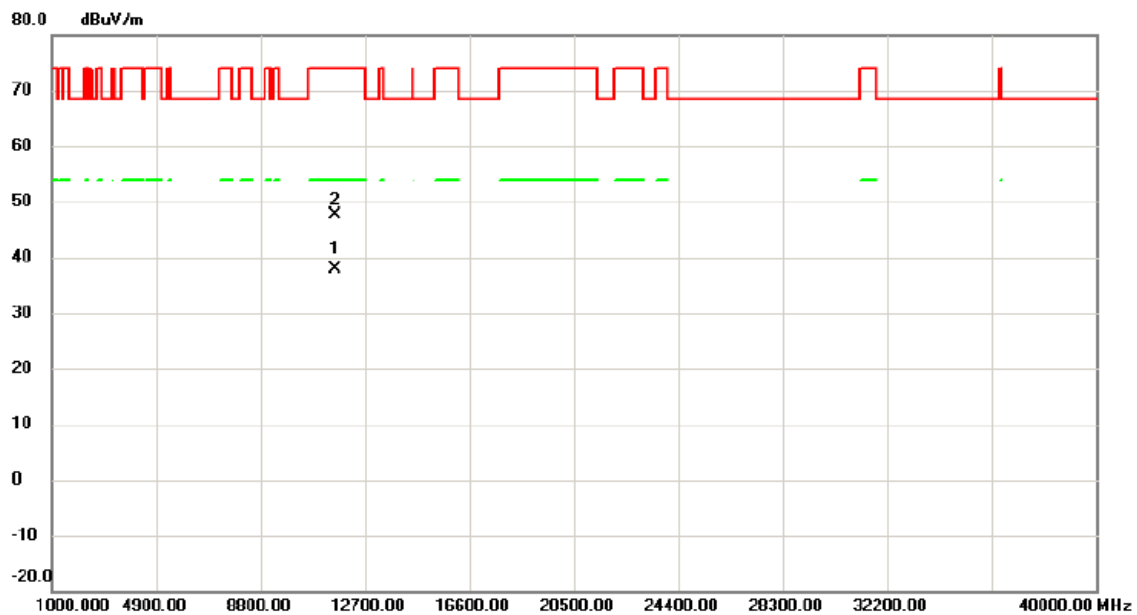


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11583.10	35.10	2.68	37.78	54.00	-16.22	AVG	
2		11584.20	44.98	2.68	47.66	74.00	-26.34	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

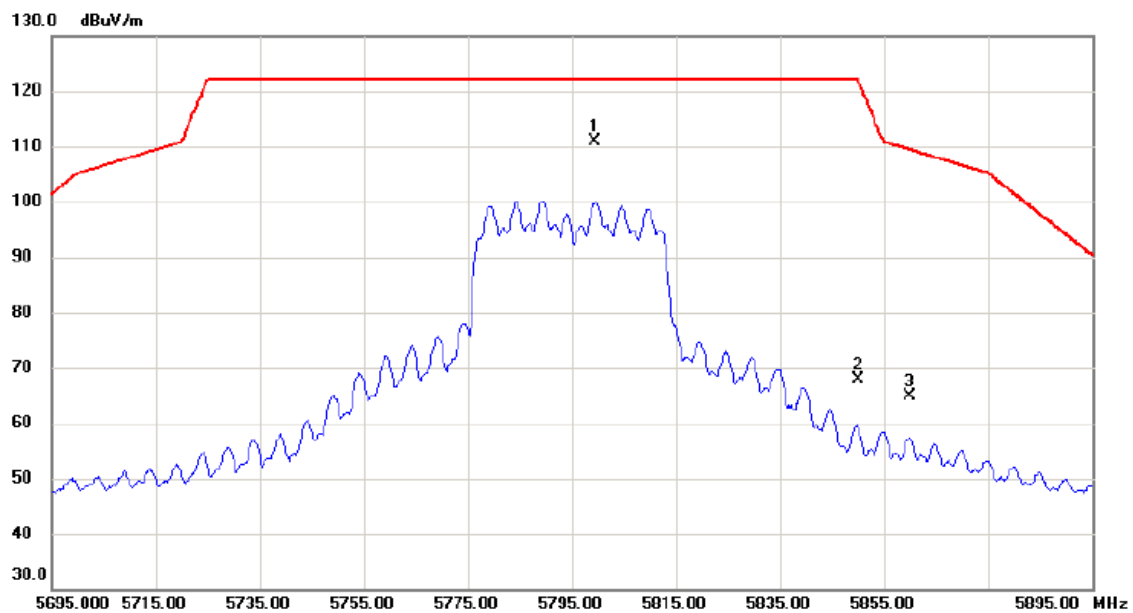

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5799.400	110.90	-0.13	110.77	122.20	-11.43	peak	主波訊號不予判定
2		5850.000	67.85	0.00	67.85	122.20	-54.35	peak	
3		5860.000	64.78	0.03	64.81	109.40	-44.59	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

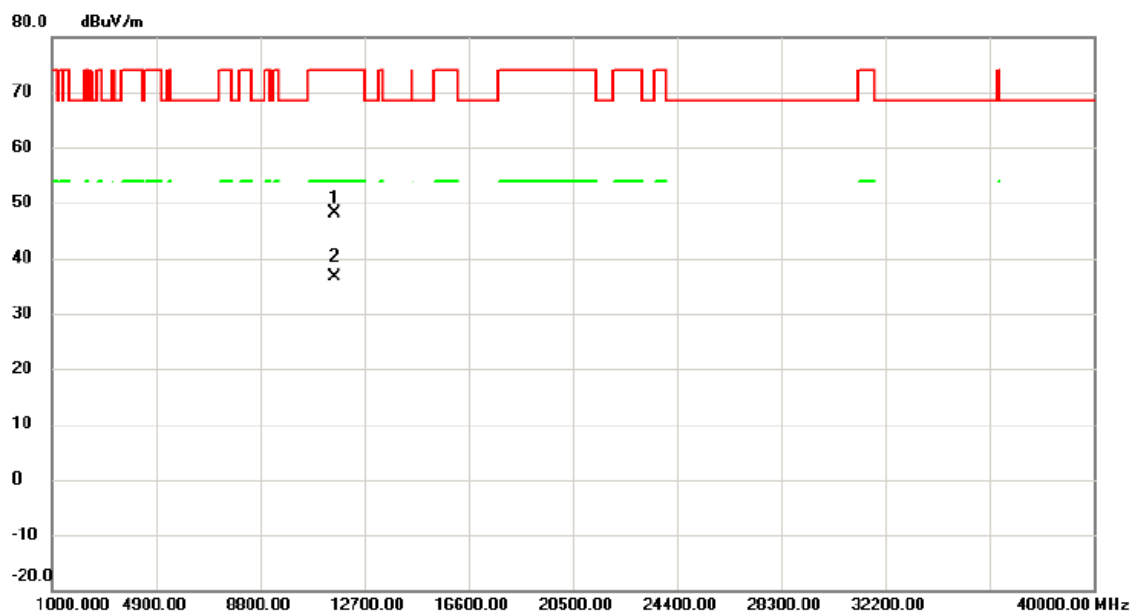


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11575.05	45.46	2.70	48.16	74.00	-25.84	peak	
2	*	11583.85	33.93	2.69	36.62	54.00	-17.38	AVG	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

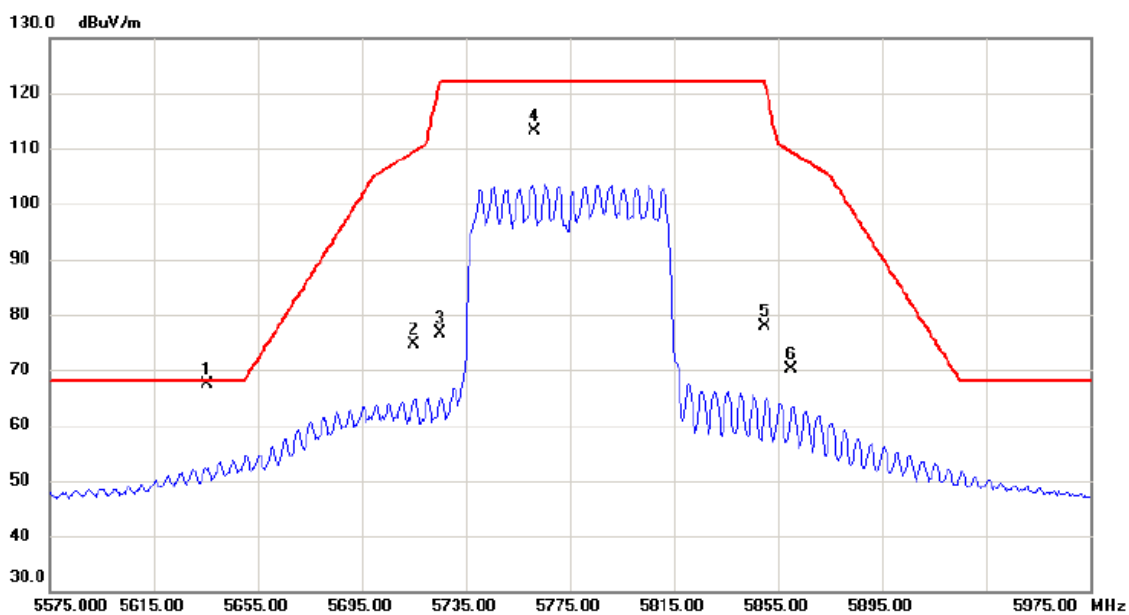


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5635.400	67.92	-0.54	67.38	68.20	-0.82	peak	
2		5715.000	74.96	-0.35	74.61	109.40	-34.79	peak	
3		5725.000	76.99	-0.31	76.68	122.20	-45.52	peak	
4		5761.200	113.26	-0.22	113.04	122.20	-9.16	peak	主波訊號不予判定
5		5850.000	77.91	0.00	77.91	122.20	-44.29	peak	
6		5860.000	70.06	0.03	70.09	109.40	-39.31	peak	

測試頻道: IEEE 802.11ac (VHT80) /
 5775 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/05
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

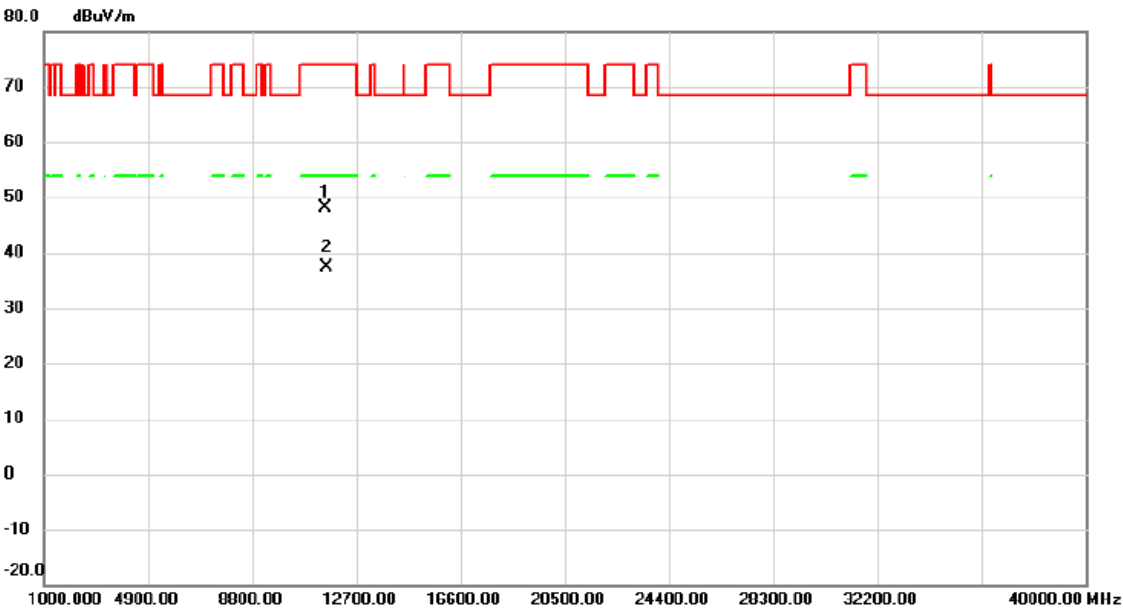

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11528.70	45.38	2.83	48.21	74.00	-25.79	peak	
2	*	11563.15	34.53	2.74	37.27	54.00	-16.73	AVG	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

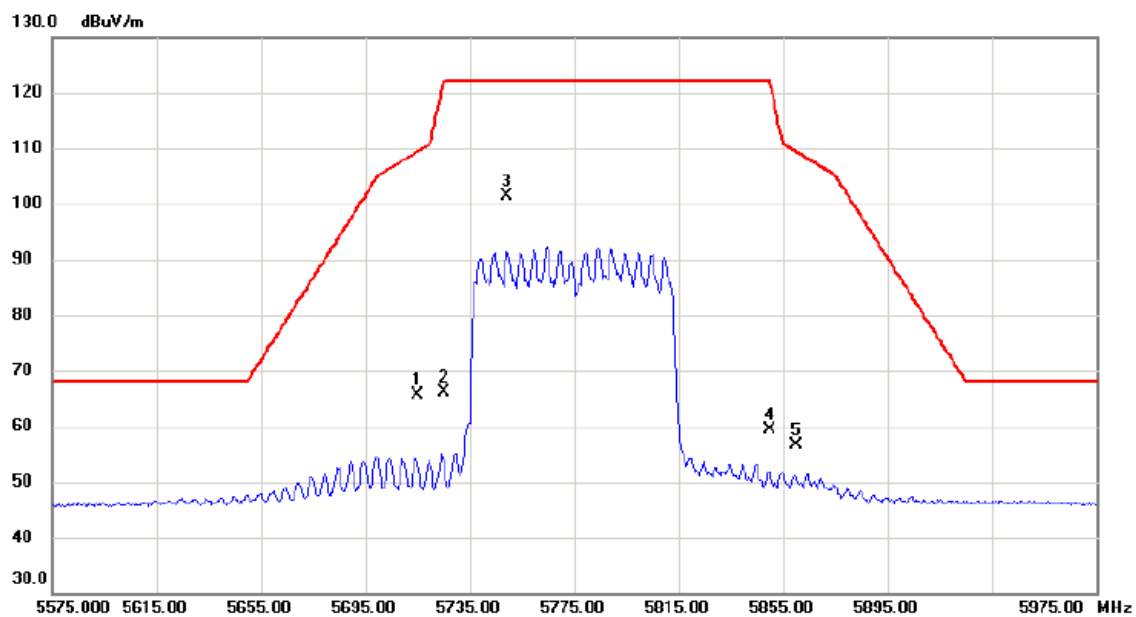


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	65.91	-0.35	65.56	109.40	-43.84	peak	
2		5725.000	66.35	-0.31	66.04	122.20	-56.16	peak	
3	*	5749.400	101.63	-0.25	101.38	122.20	-20.82	peak	主波訊號不予判定
4		5850.000	59.35	0.00	59.35	122.20	-62.85	peak	
5		5860.000	56.71	0.03	56.74	109.40	-52.66	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

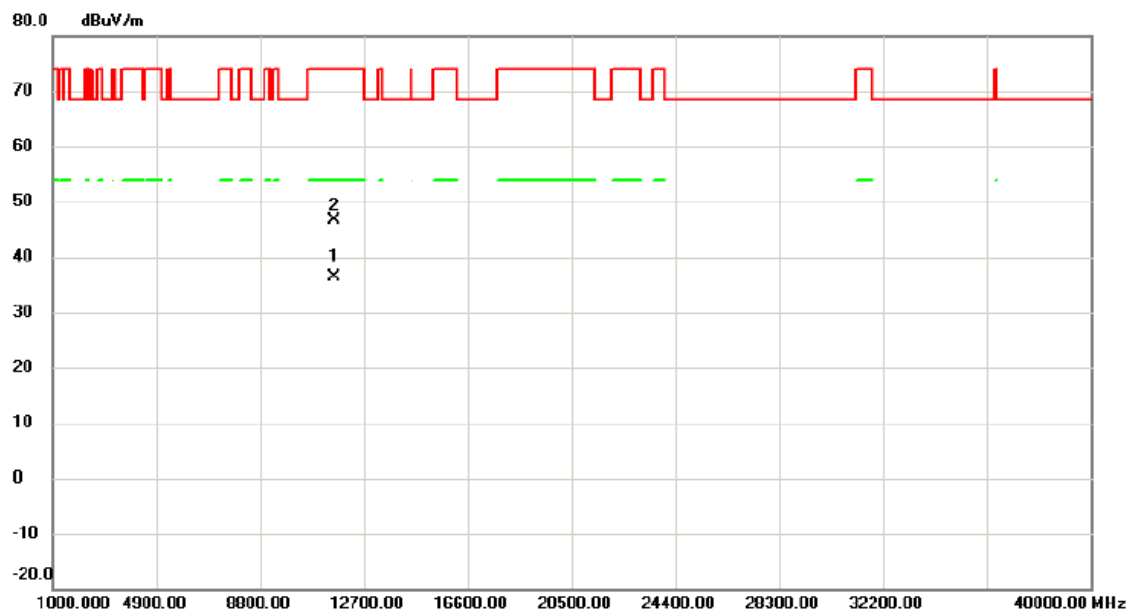

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11573.50	33.65	2.71	36.36	54.00	-17.64	AVG	
2		11574.40	43.94	2.71	46.65	74.00	-27.35	peak	

With Beamforming

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

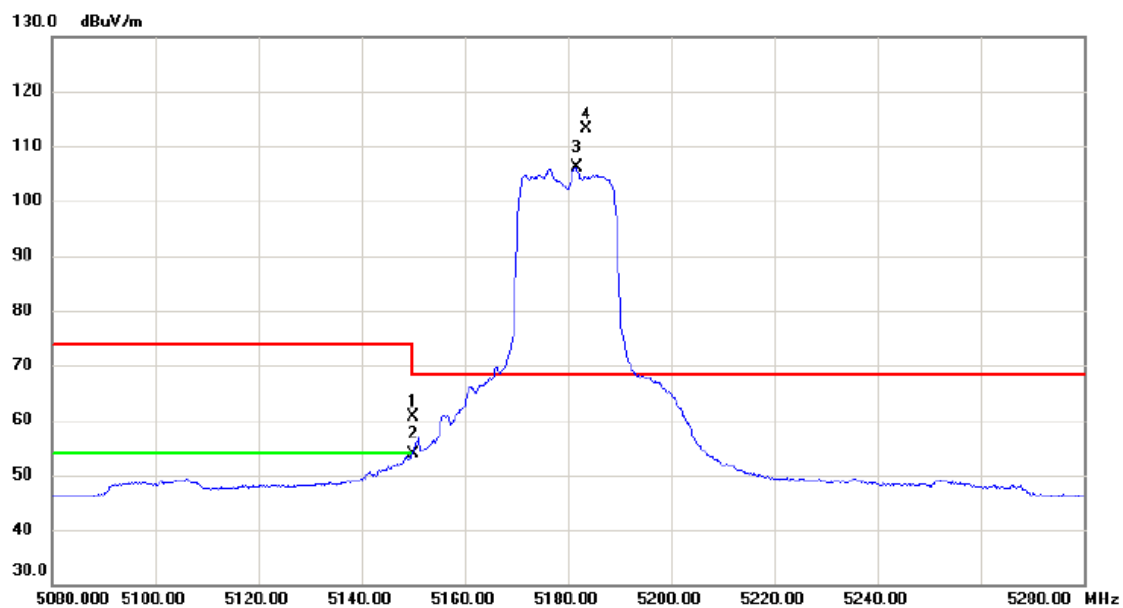


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	61.87	-1.17	60.70	74.00	-13.30	peak	
2		5150.000	55.10	-1.17	53.93	54.00	-0.07	AVG	
3	X	5181.600	107.25	-1.15	106.10	68.30	37.80	AVG	主波訊號不予判定
4	*	5183.600	114.25	-1.15	113.10	68.30	44.80	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
 5180 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

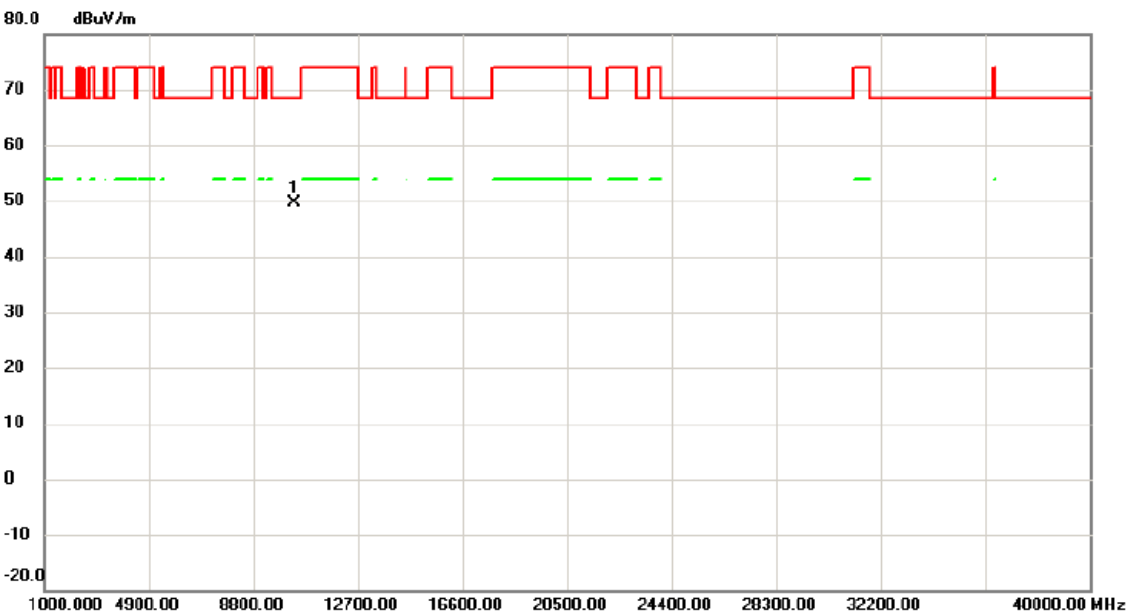

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10354.27	47.98	1.58	49.56	68.30	-18.74	peak	

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

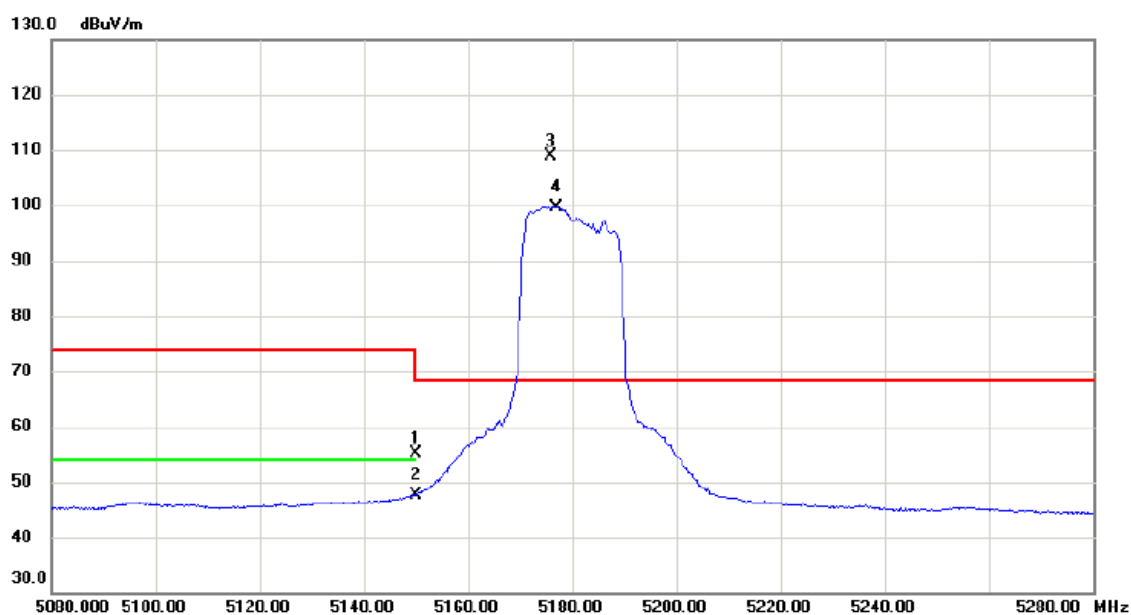

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	56.18	-1.17	55.01	74.00	-18.99	peak	
2		5150.000	48.91	-1.17	47.74	54.00	-6.26	AVG	
3	*	5175.900	109.95	-1.14	108.81	68.30	40.51	peak	主波訊號不予判定
4	X	5176.800	100.86	-1.14	99.72	68.30	31.42	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

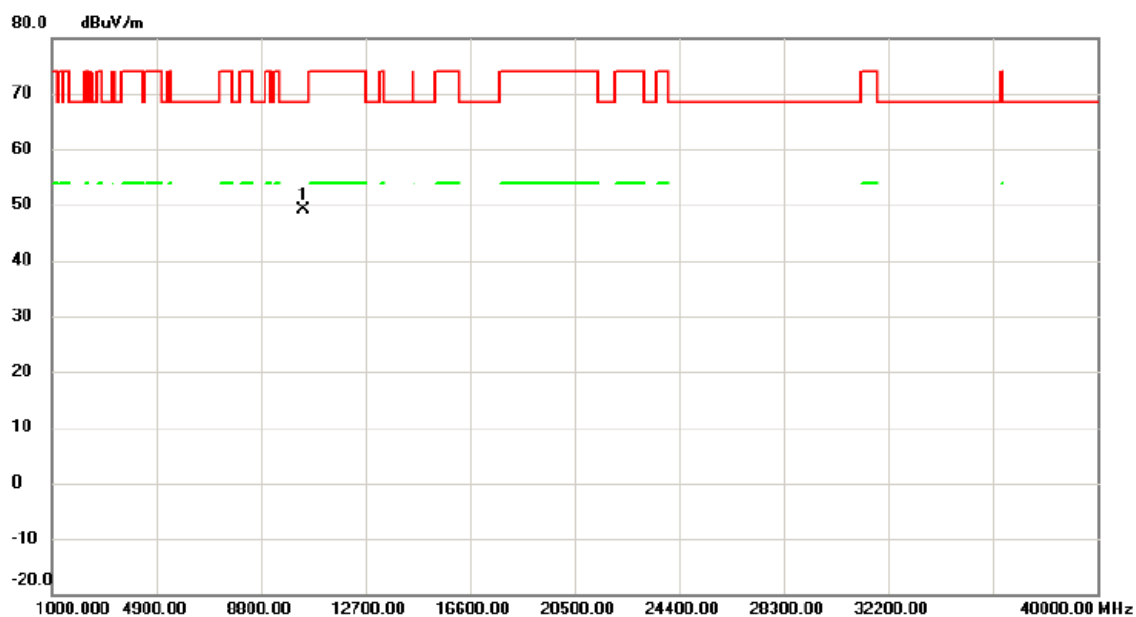

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.37	47.66	1.57	49.23	68.30	-19.07	peak	

測試頻道: IEEE 802.11n (HT20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

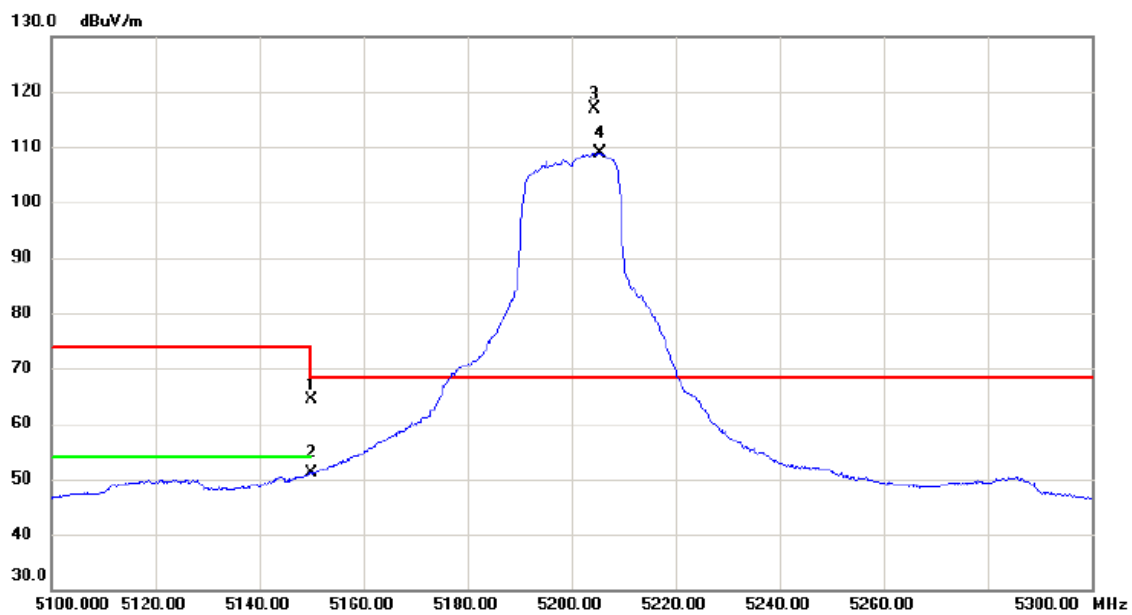


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	65.67	-1.17	64.50	74.00	-9.50	peak	
2		5150.000	52.19	-1.17	51.02	54.00	-2.98	AVG	
3	*	5204.400	118.02	-1.13	116.89	68.30	48.59	peak	主波訊號不予判定
4	X	5205.400	110.04	-1.13	108.91	68.30	40.61	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

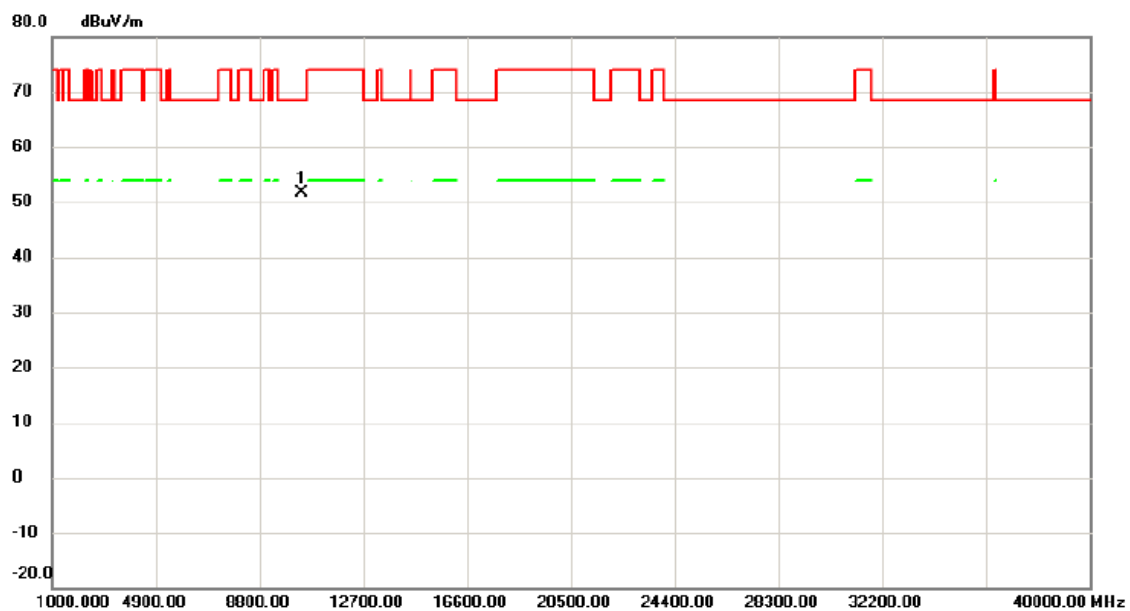


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10394.80	49.90	1.61	51.51	68.30	-16.79	peak	

測試頻道: IEEE 802.11n (HT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

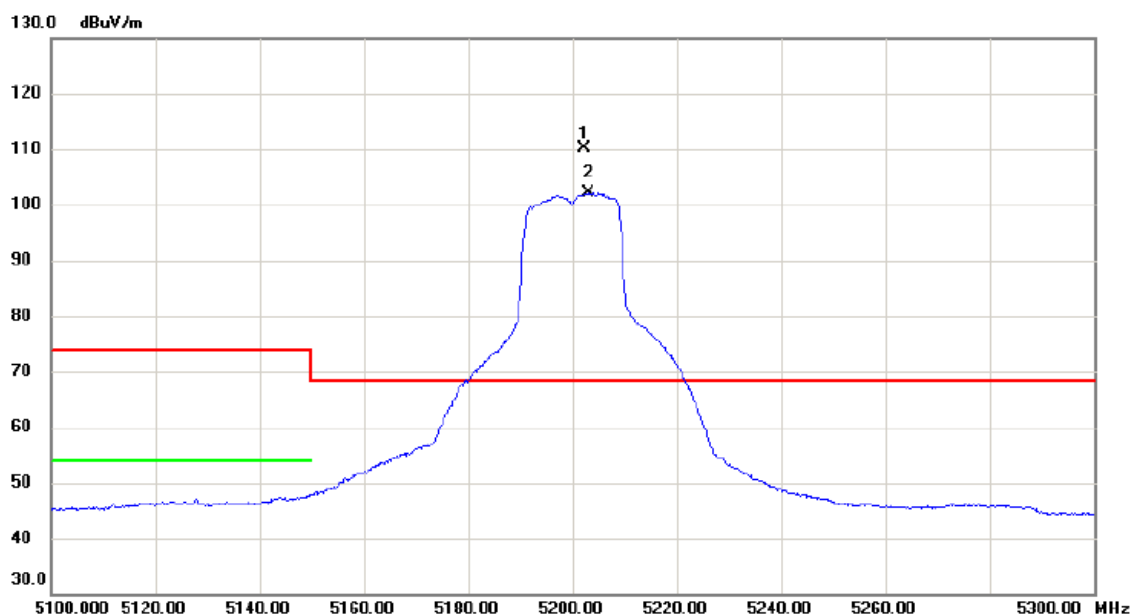


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5202.300	111.37	-1.13	110.24	68.30	41.94	peak	主波訊號不予判定
2	X	5203.000	103.20	-1.13	102.07	68.30	33.77	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

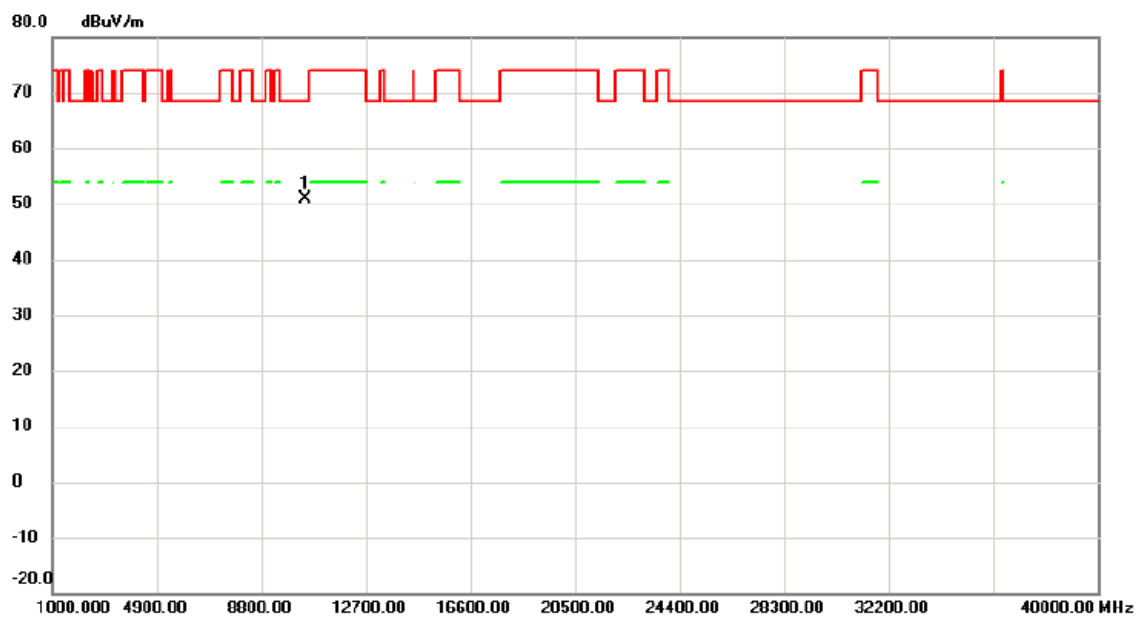


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10413.15	49.27	1.63	50.90	68.30	-17.40	peak	

測試頻道: IEEE 802.11n (HT20) /
5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

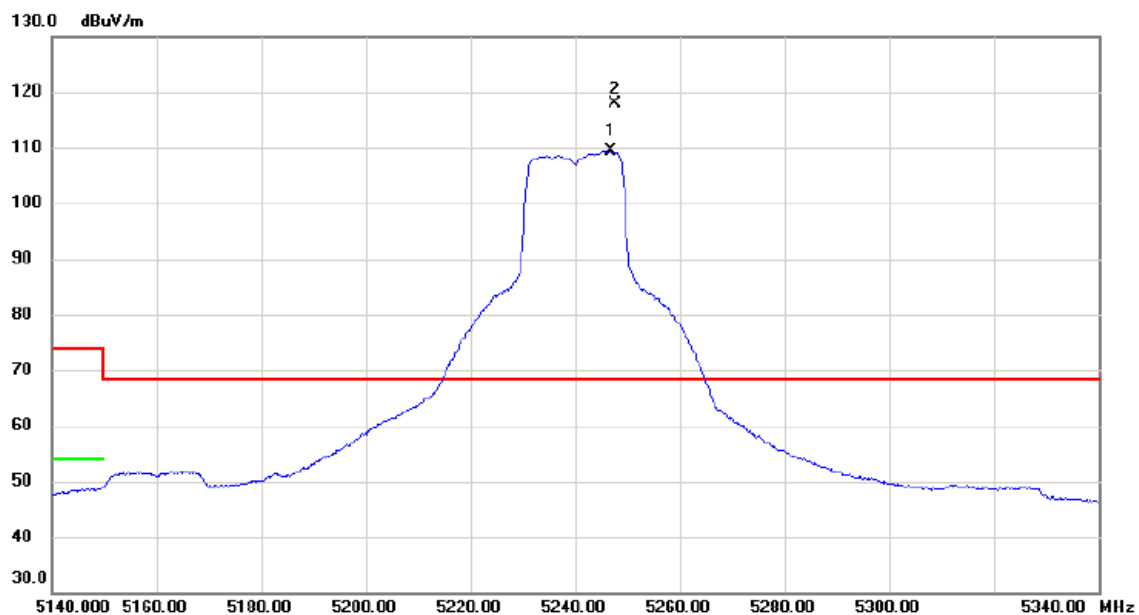

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5246.900	110.48	-1.09	109.39	68.30	41.09	AVG	主波訊號不予判定
2	*	5247.600	119.00	-1.09	117.91	68.30	49.61	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

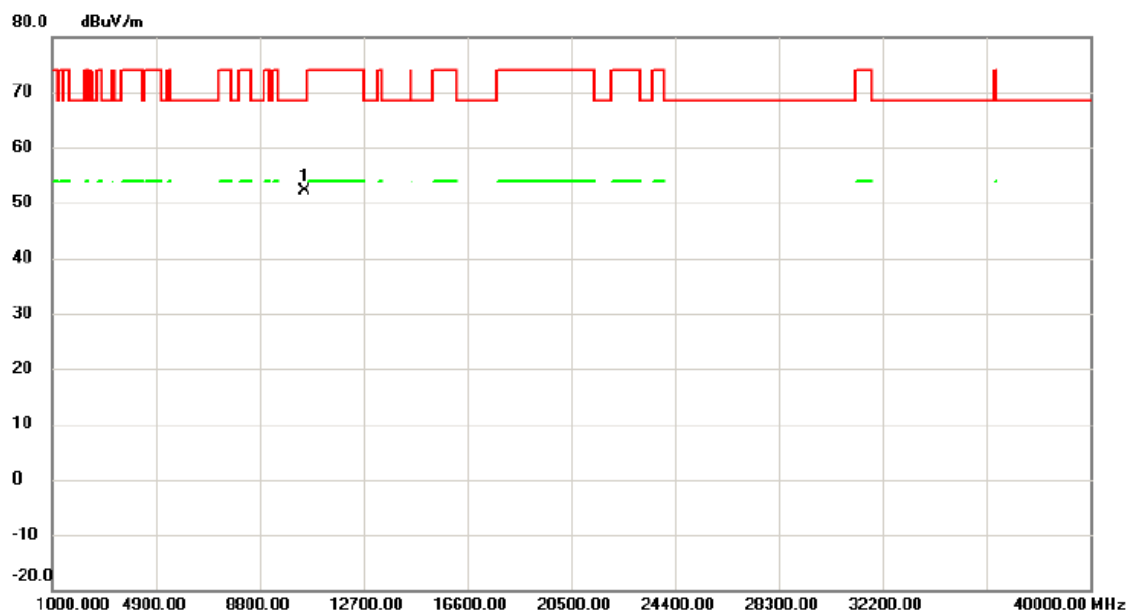


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10483.15	50.54	1.70	52.24	68.30	-16.06	peak	

測試頻道: IEEE 802.11n (HT20) /
 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

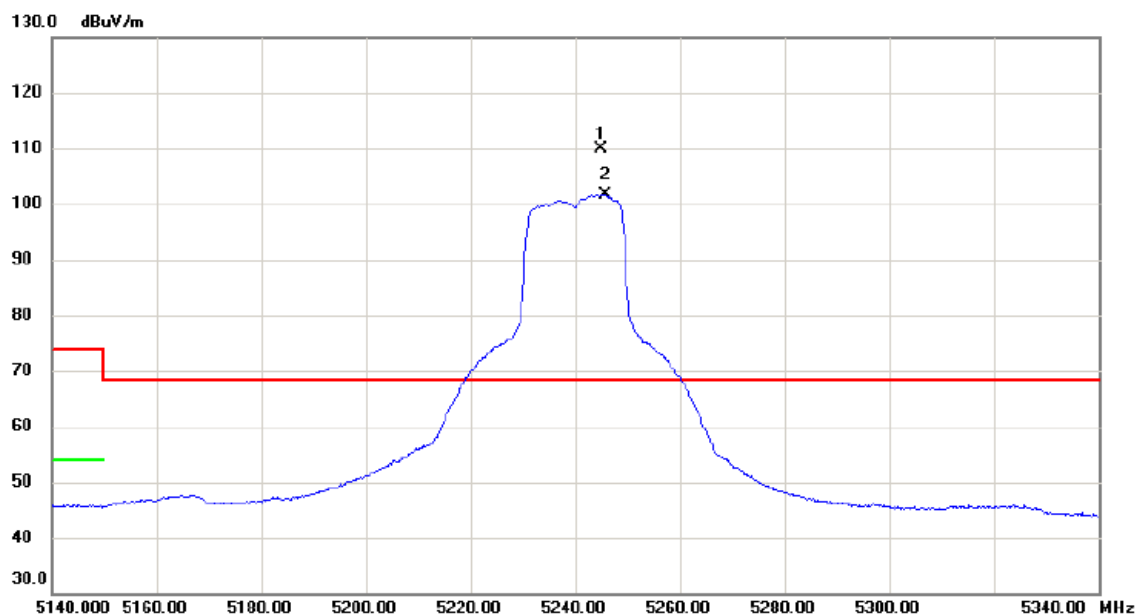


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5245.000	111.09	-1.09	110.00	68.30	41.70	peak	主波訊號不予判定
2	X	5245.800	102.79	-1.09	101.70	68.30	33.40	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X Polarization: Horizontal

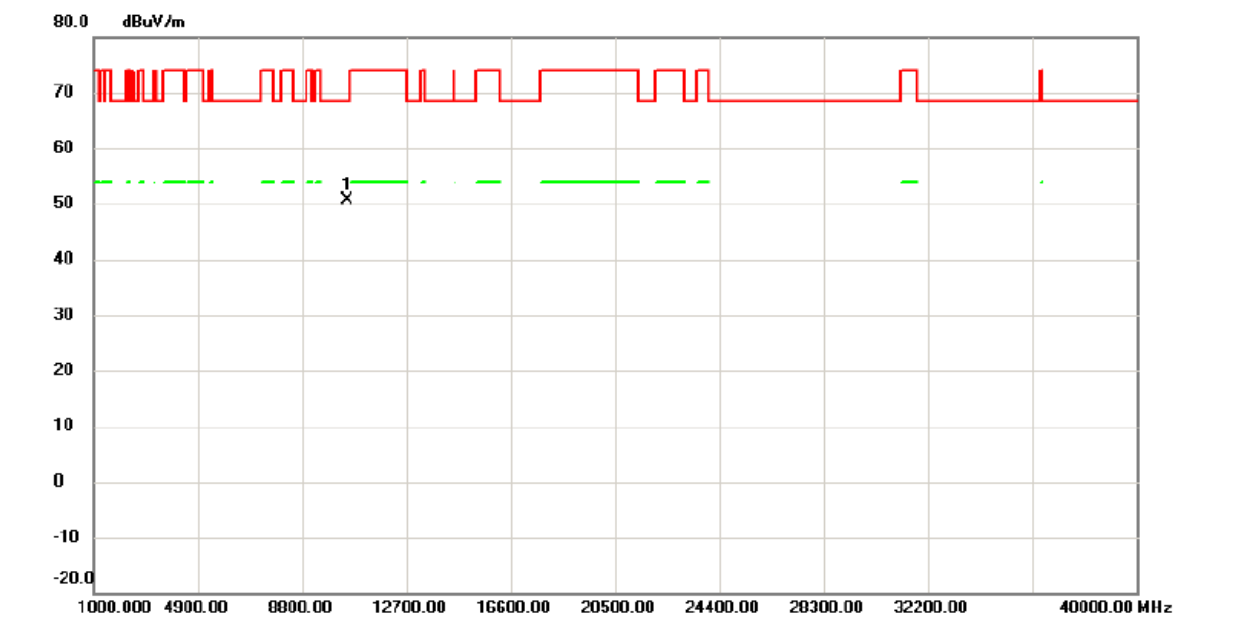

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10485.25	49.02	1.71	50.73	68.30	-17.57	peak	

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

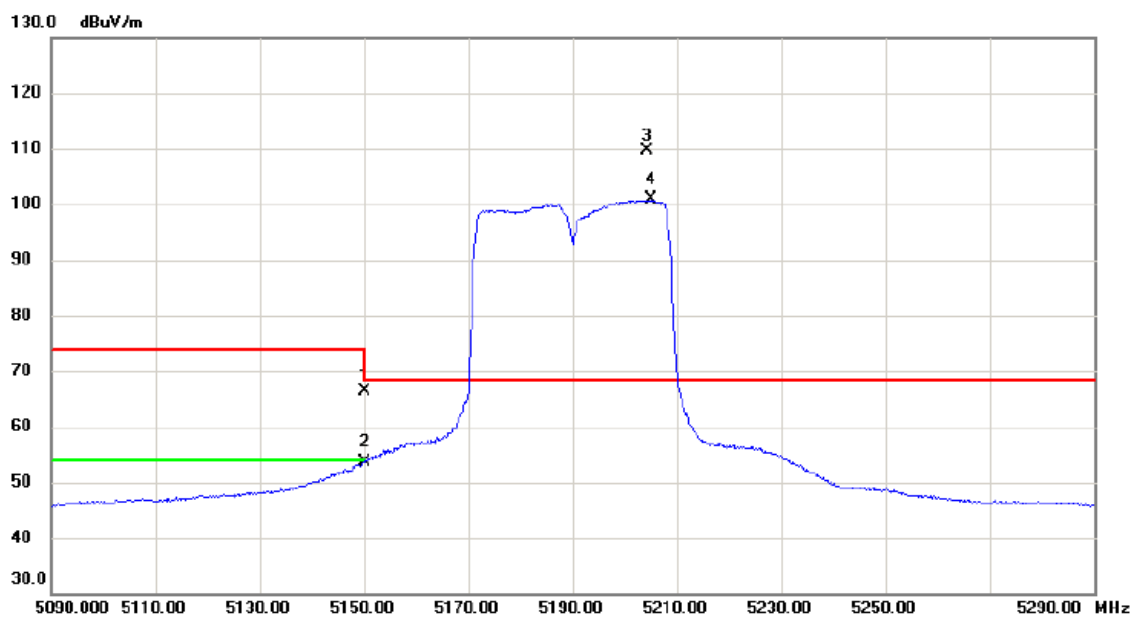


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	67.67	-1.17	66.50	74.00	-7.50	peak	
2		5150.000	54.77	-1.17	53.60	54.00	-0.40	AVG	
3	*	5204.200	110.85	-1.13	109.72	68.30	41.42	peak	主波訊號不予判定
4	X	5205.200	101.93	-1.13	100.80	68.30	32.50	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

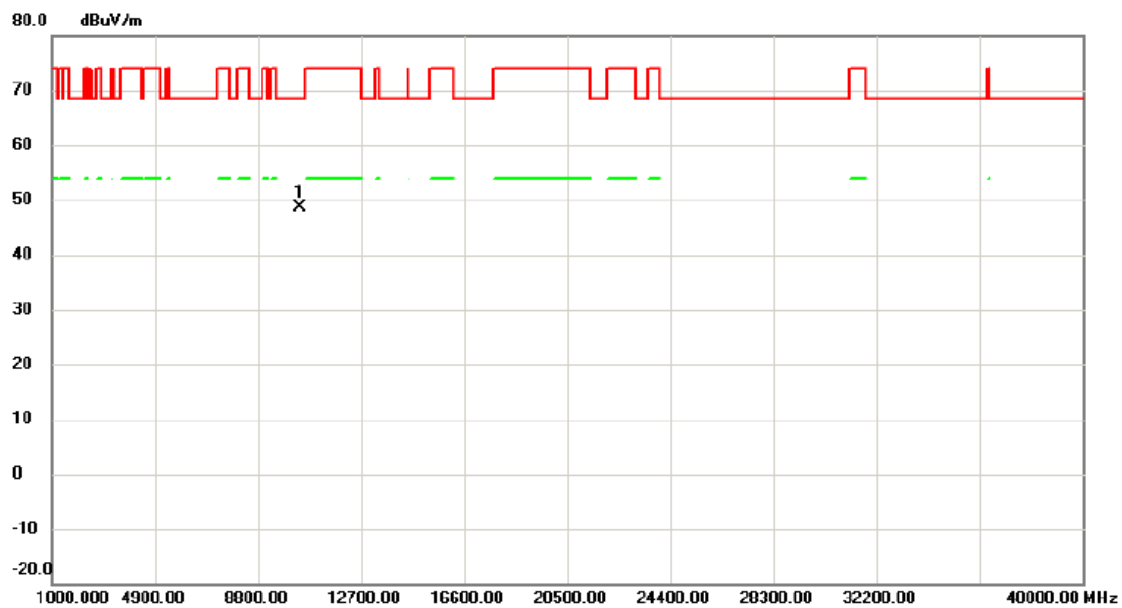

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10391.95	46.99	1.61	48.60	68.30	-19.70	peak	

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

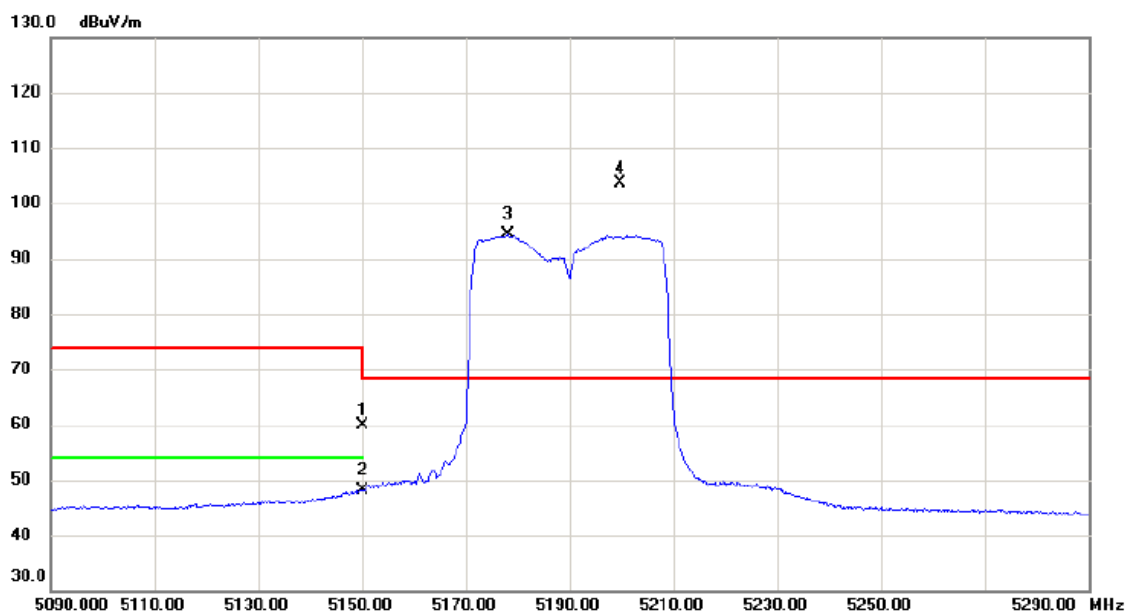


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	61.09	-1.17	59.92	74.00	-14.08	peak	
2		5150.000	49.30	-1.17	48.13	54.00	-5.87	AVG	
3	X	5178.100	95.42	-1.14	94.28	68.30	25.98	AVG	主波訊號不予判定
4	*	5199.800	104.65	-1.13	103.52	68.30	35.22	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

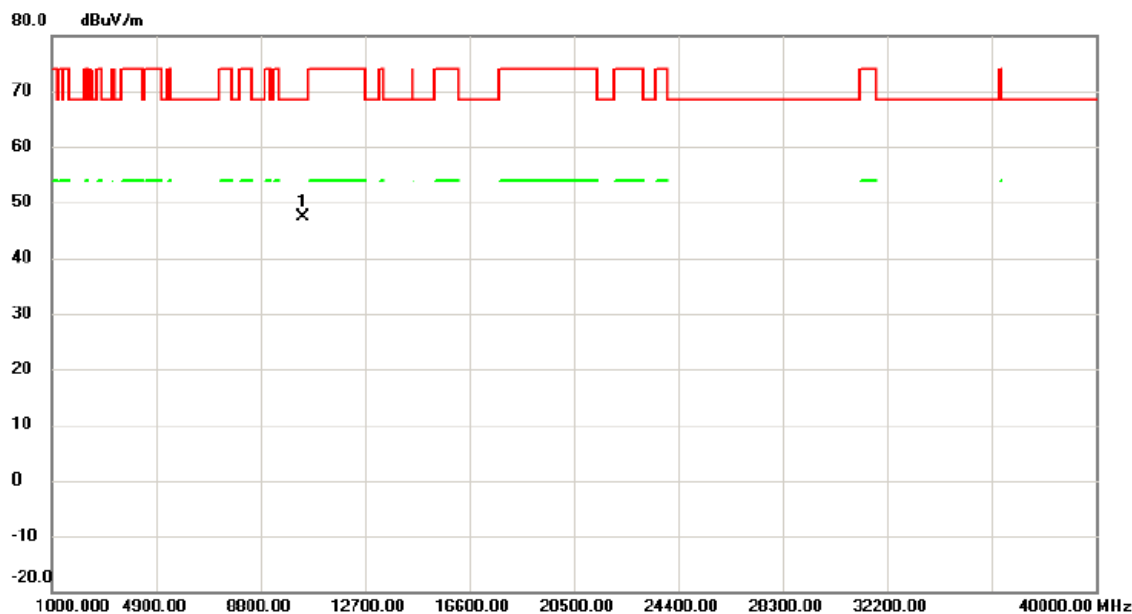

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	10381.80	45.89	1.59	47.48	68.30	-20.82	peak

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

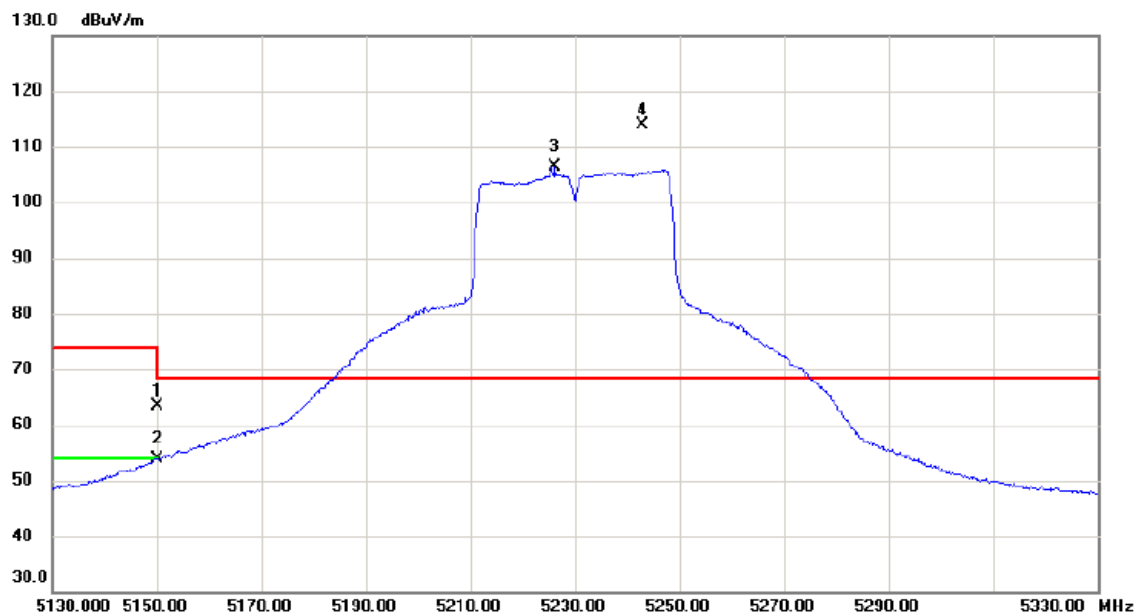


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	64.61	-1.17	63.44	74.00	-10.56	peak	
2		5150.000	55.00	-1.17	53.83	54.00	-0.17	AVG	
3	X	5226.200	107.43	-1.10	106.33	68.30	38.03	AVG	主波訊號不予判定
4	*	5242.800	114.96	-1.09	113.87	68.30	45.57	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

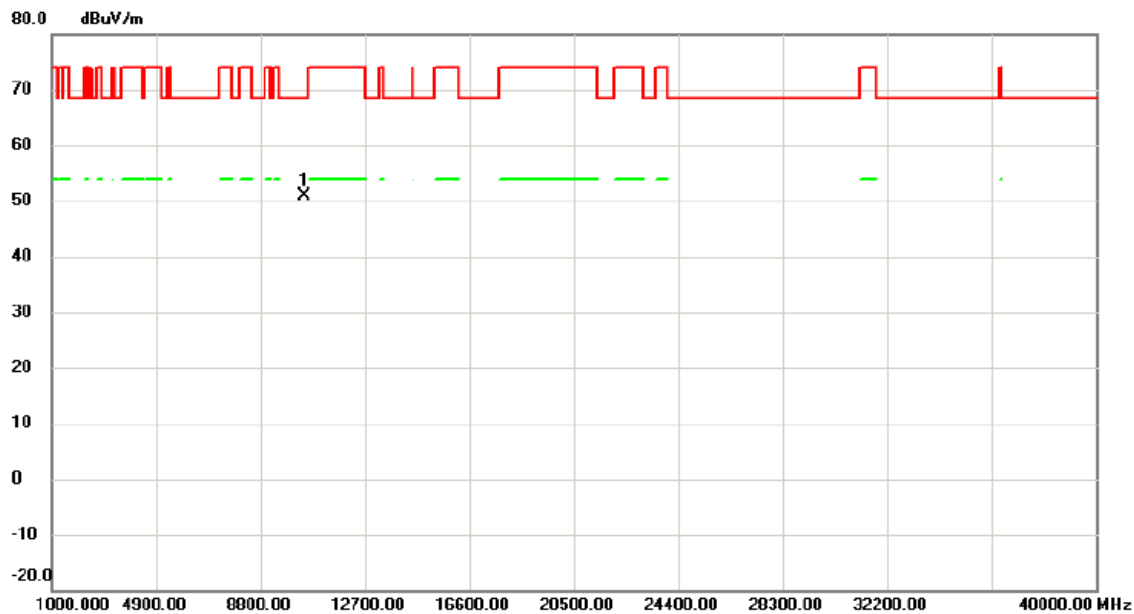


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10458.90	49.13	1.68	50.81	68.30	-17.49	peak	

測試頻道: IEEE 802.11n (HT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

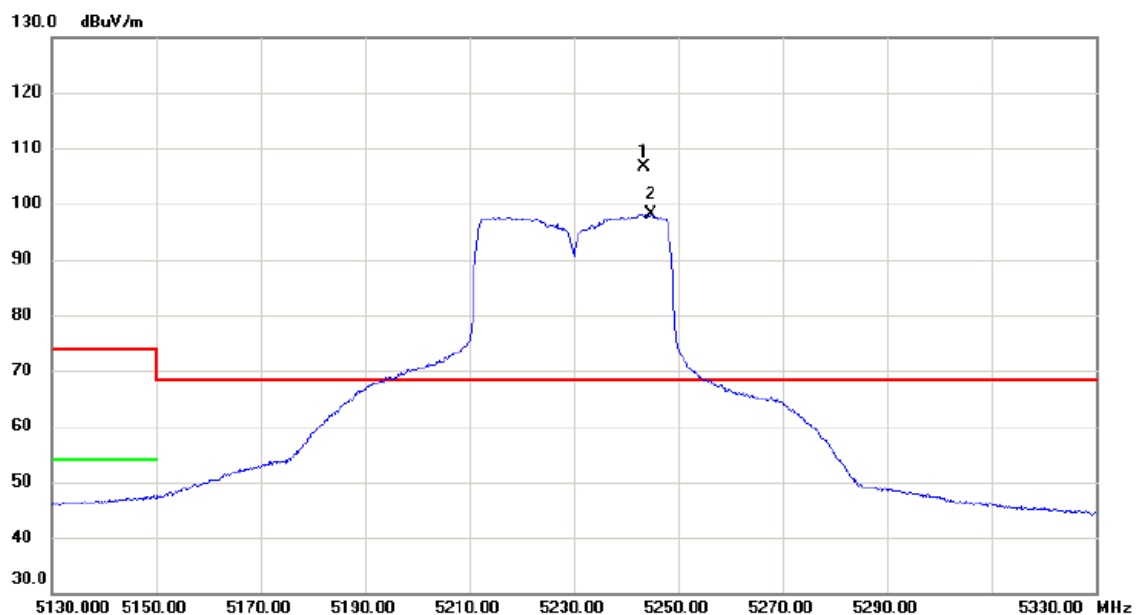

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5243.400	107.77	-1.09	106.68	68.30	38.38	peak	主波訊號不予判定
2	X	5244.800	99.25	-1.09	98.16	68.30	29.86	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

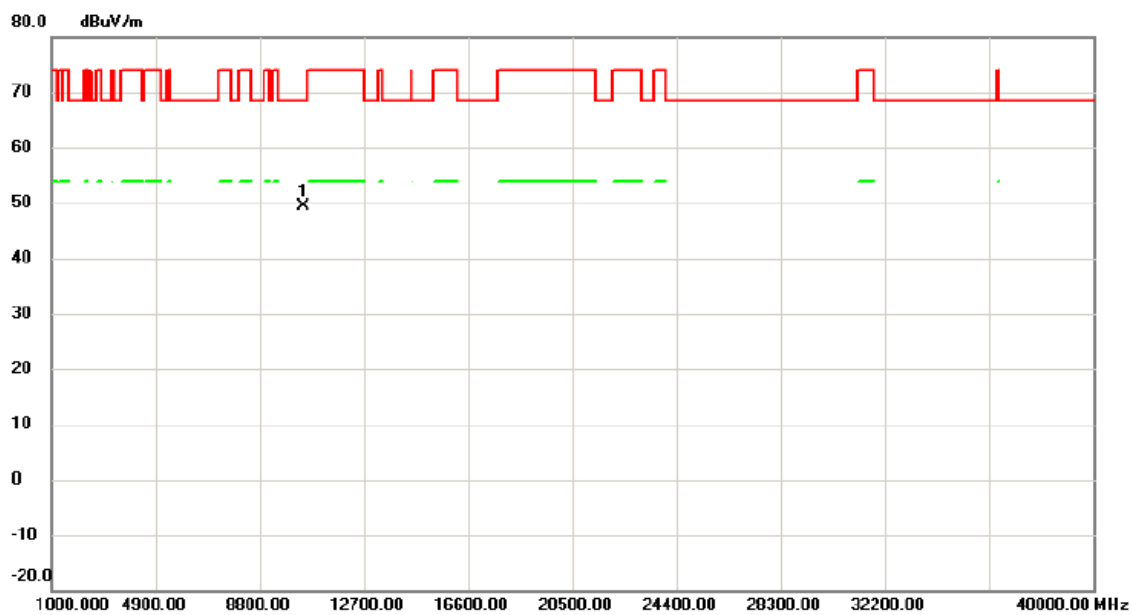

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10461.00	47.60	1.69	49.29	68.30	-19.01	peak	

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

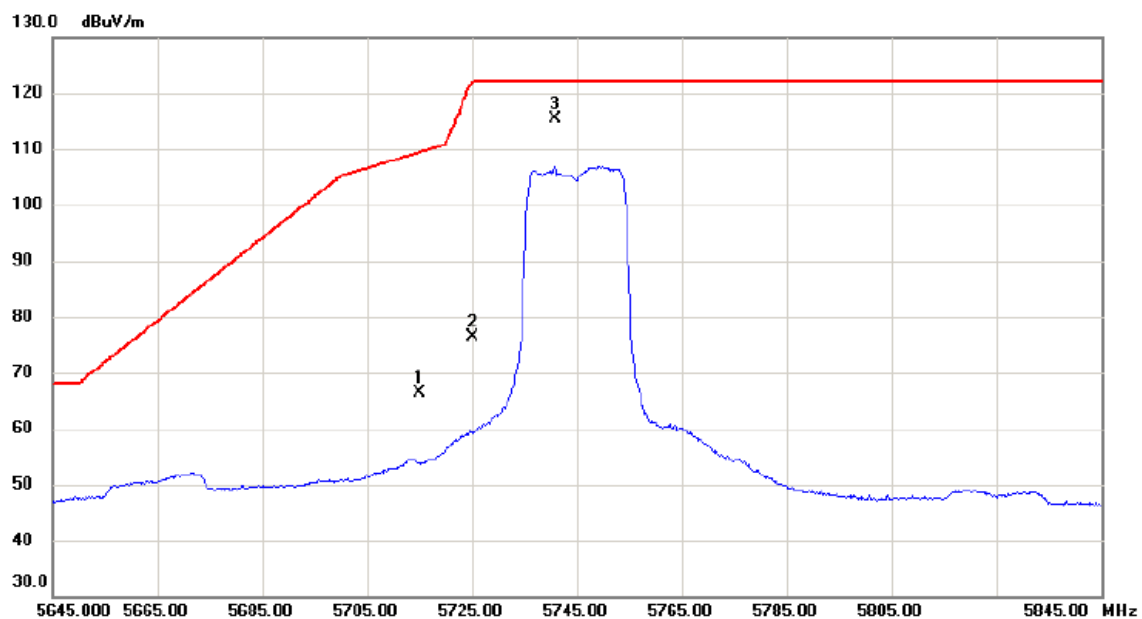


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	66.84	-0.35	66.49	109.40	-42.91	peak	
2		5725.000	76.80	-0.31	76.49	122.20	-45.71	peak	
3	*	5740.800	115.55	-0.26	115.29	122.20	-6.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

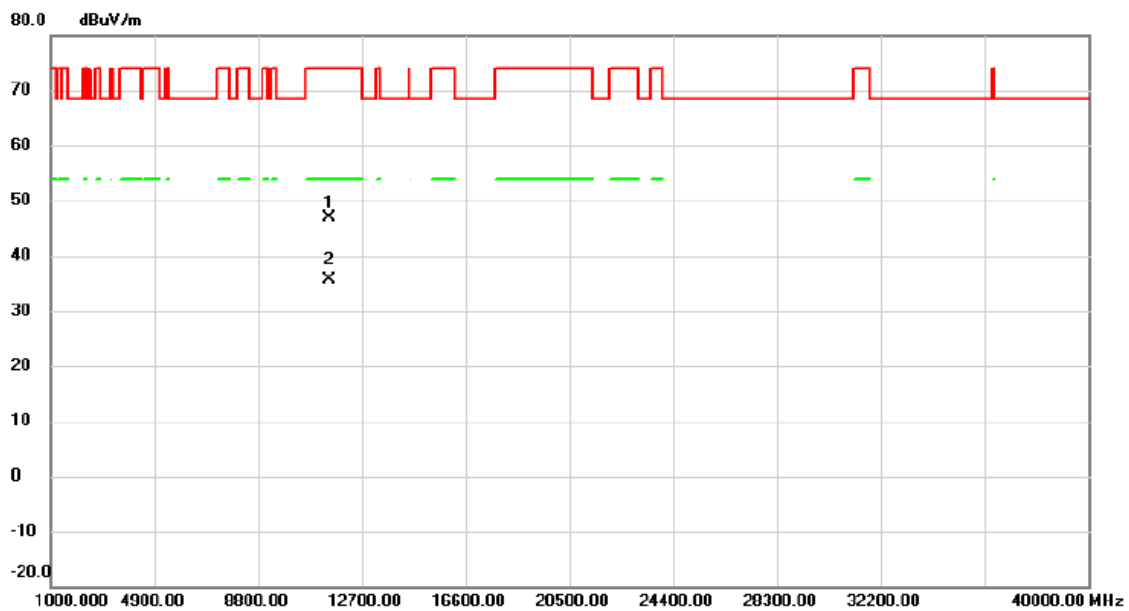


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11482.39	43.88	2.90	46.78	74.00	-27.22	peak	
2	*	11498.68	32.67	2.91	35.58	54.00	-18.42	AVG	

測試頻道: IEEE 802.11n (HT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

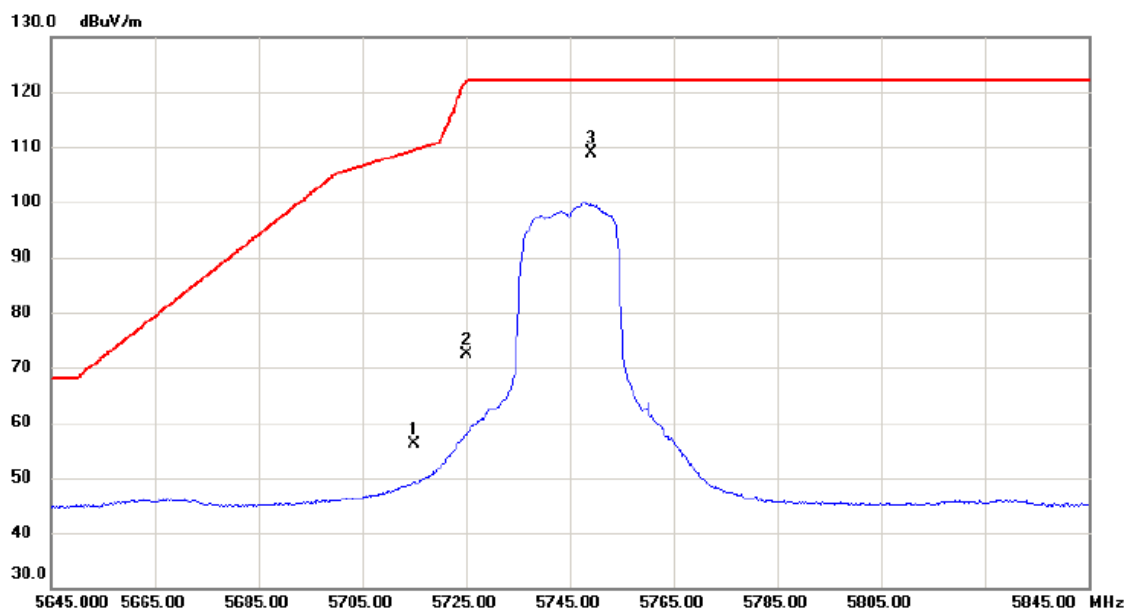


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	56.56	-0.35	56.21	109.40	-53.19	peak	
2		5725.000	72.74	-0.31	72.43	122.20	-49.77	peak	
3	*	5749.200	109.13	-0.25	108.88	122.20	-13.32	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

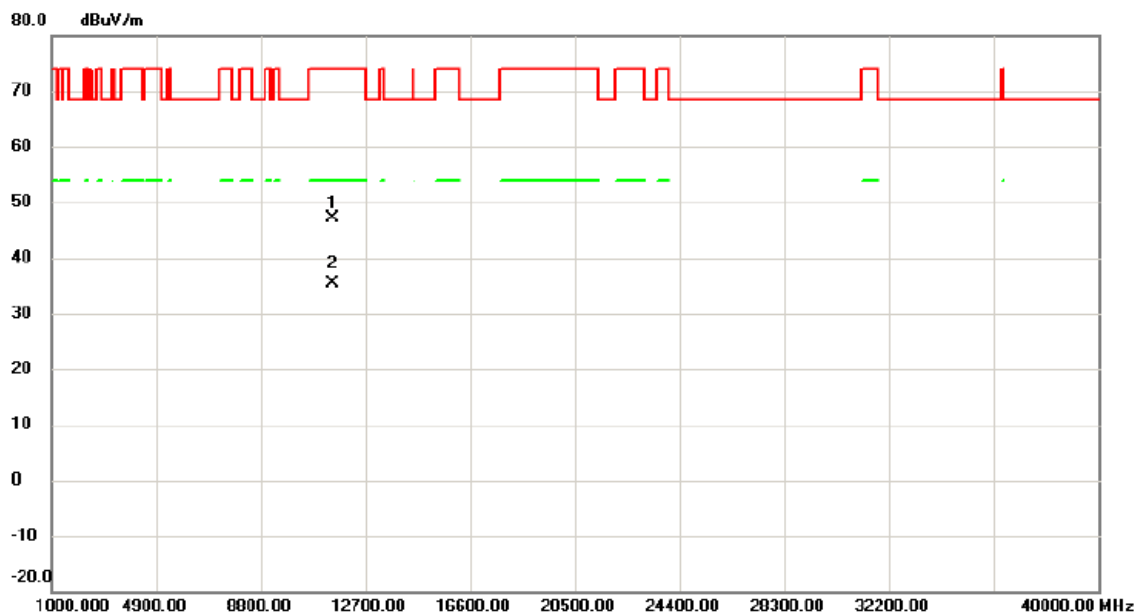

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11498.34	44.31	2.91	47.22	74.00	-26.78	peak	
2	*	11499.60	32.38	2.91	35.29	54.00	-18.71	AVG	

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

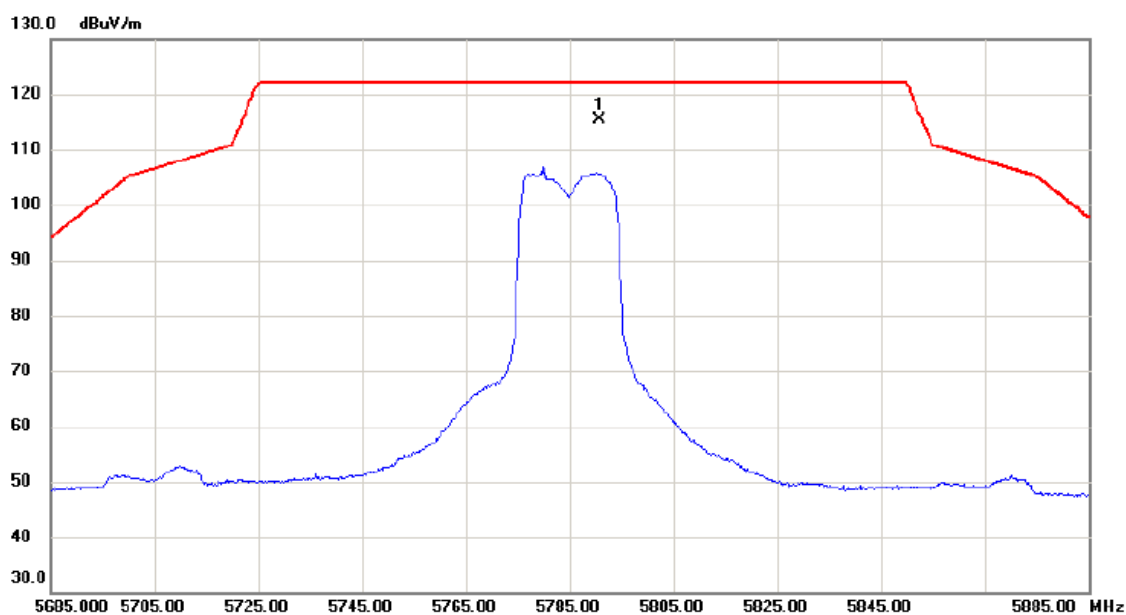

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5790.600	115.45	-0.15	115.30	122.20	-6.90	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

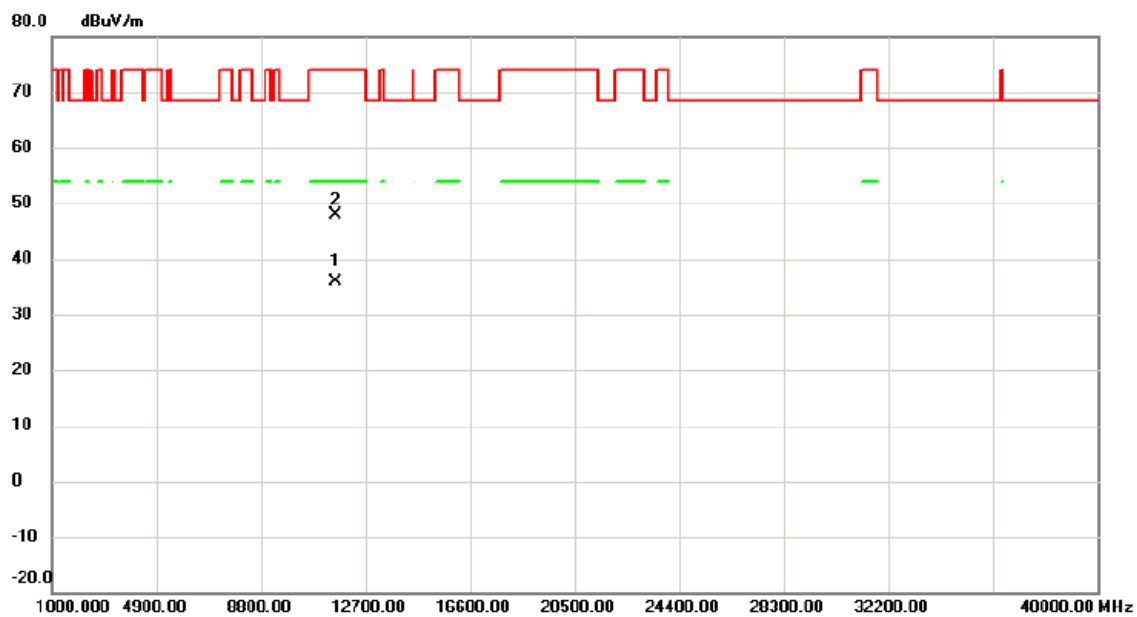

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11563.33	33.24	2.74	35.98	54.00	-18.02	AVG	
2		11572.05	45.24	2.71	47.95	74.00	-26.05	peak	

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

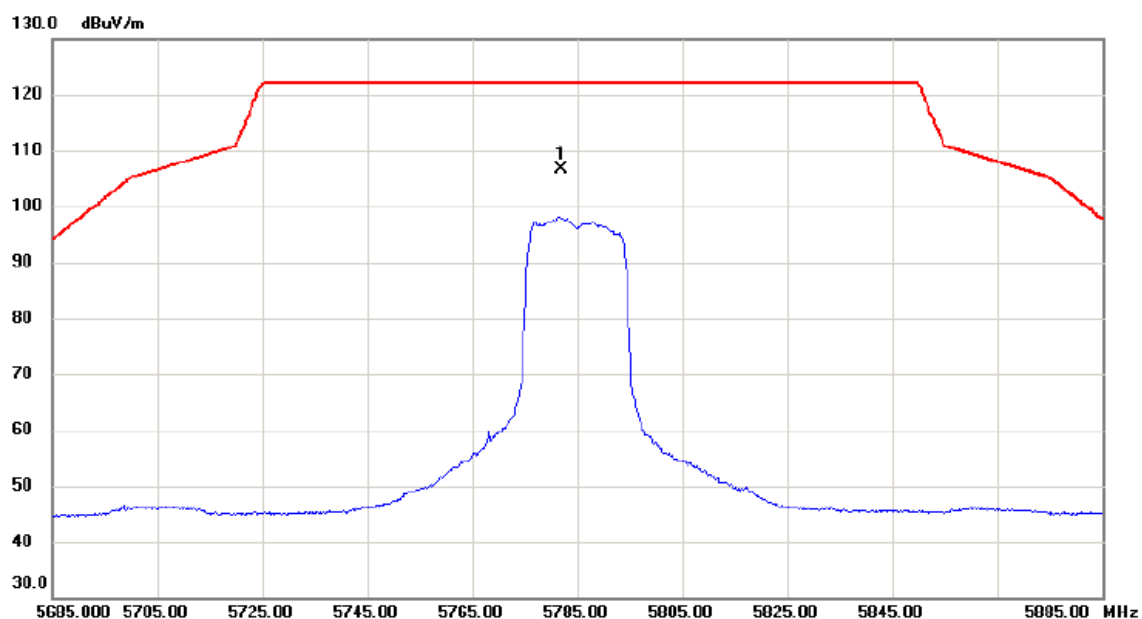

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5782.000	106.89	-0.17	106.72	122.20	-15.48	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

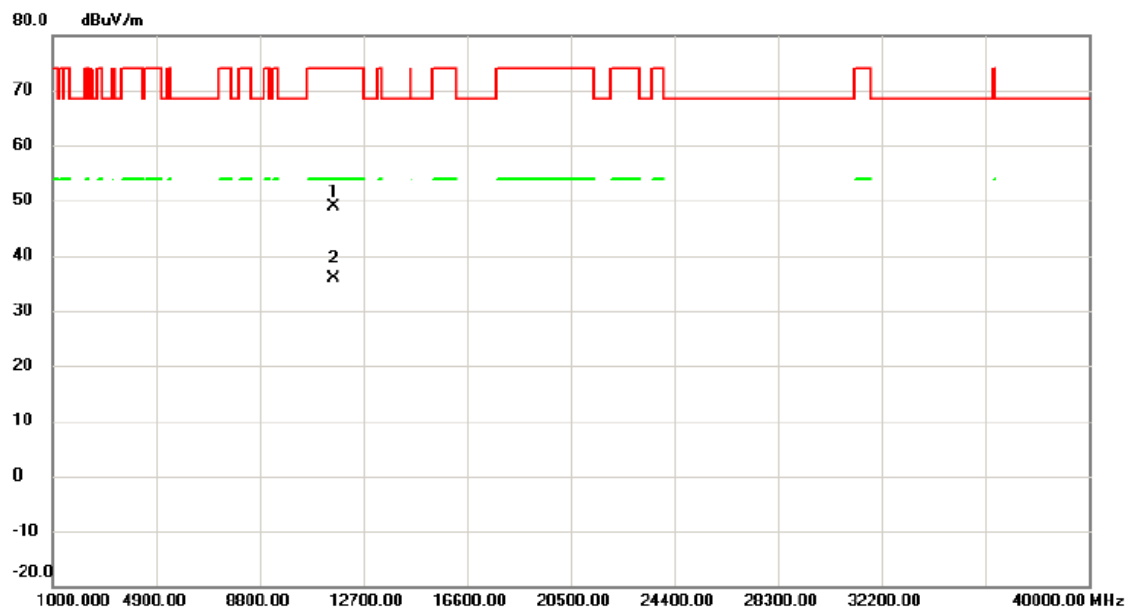


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11571.03	46.27	2.71	48.98	74.00	-25.02	peak	
2	*	11572.53	33.11	2.71	35.82	54.00	-18.18	AVG	

測試頻道: IEEE 802.11n (HT20) /
 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

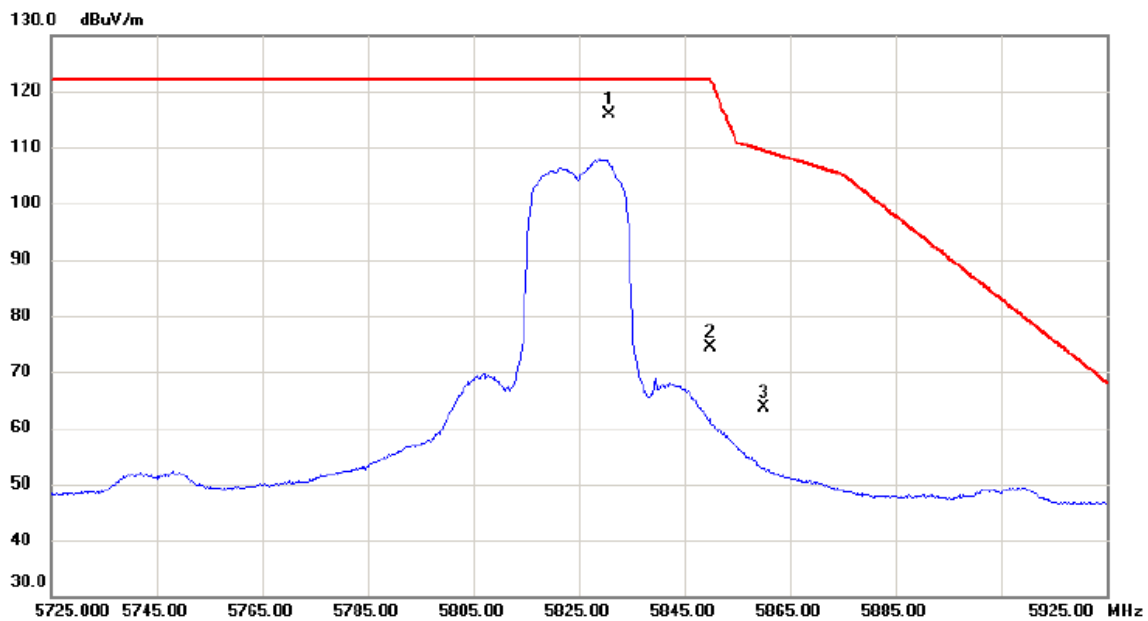


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5830.800	116.01	-0.04	115.97	122.20	-6.23	peak	主波訊號不予判定
2		5850.000	74.26	0.00	74.26	122.20	-47.94	peak	
3		5860.000	63.61	0.03	63.64	109.40	-45.76	peak	

測試頻道: IEEE 802.11n (HT20) /
 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

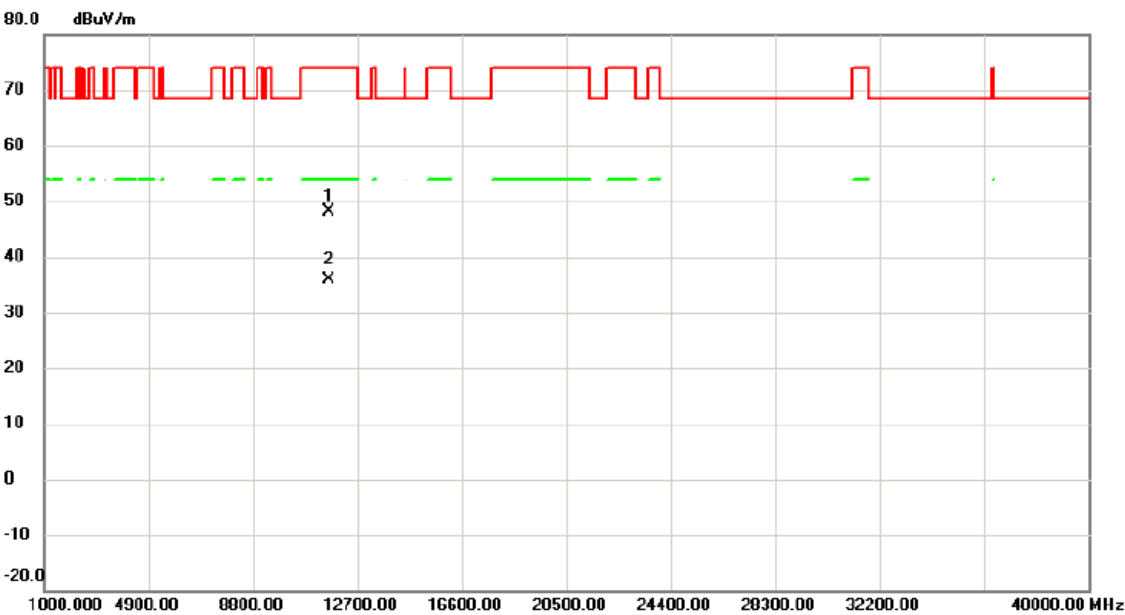


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11644.18	45.55	2.51	48.06	74.00	-25.94	peak	
2	*	11657.07	33.51	2.48	35.99	54.00	-18.01	AVG	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

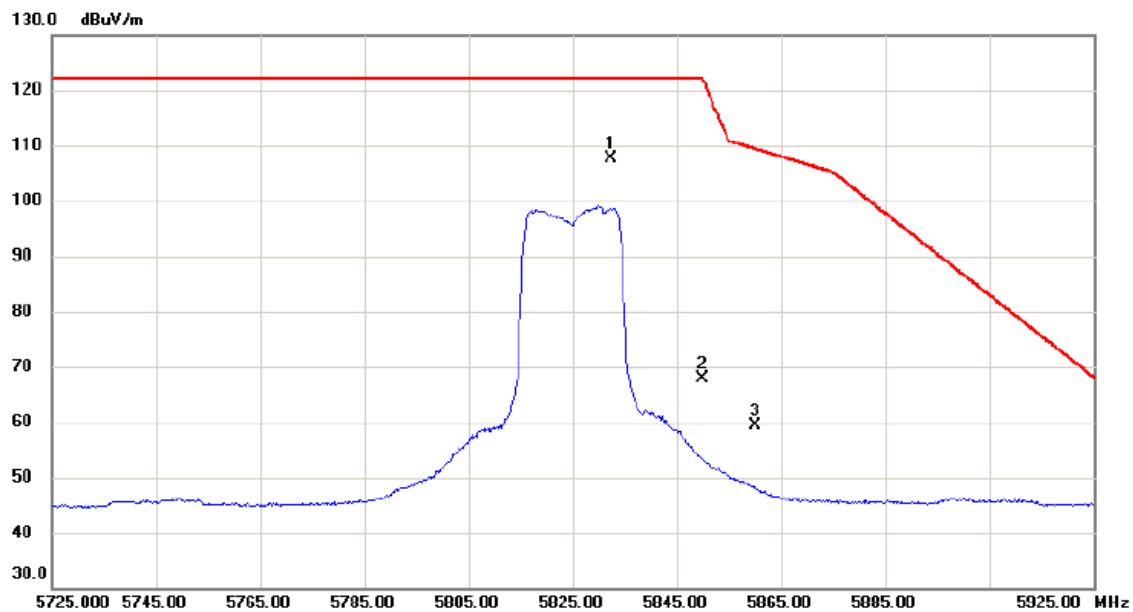

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

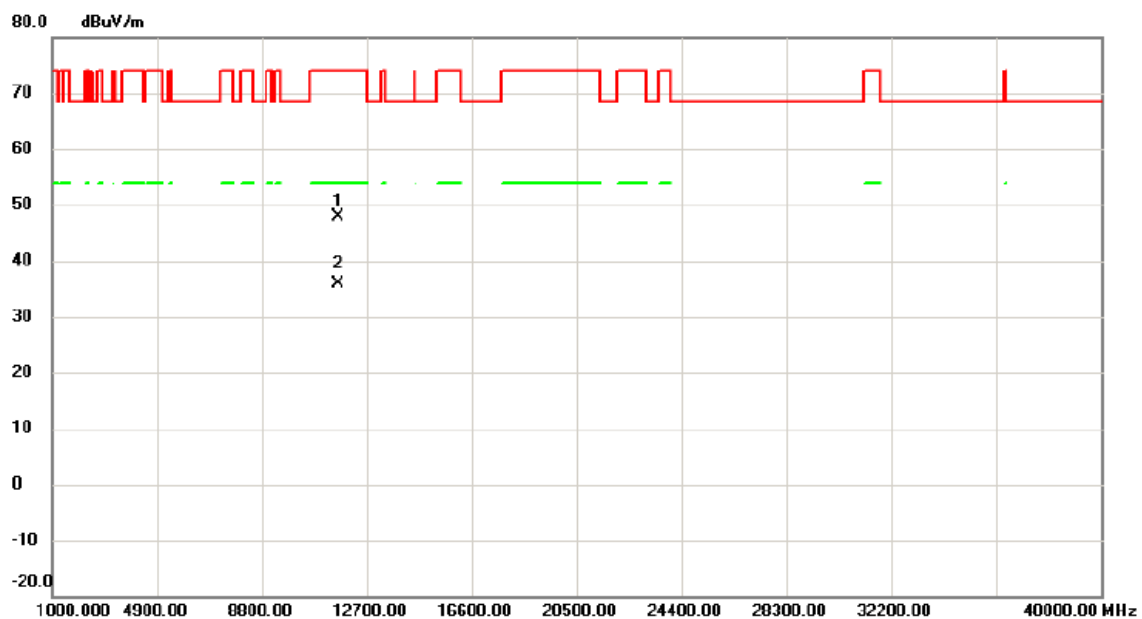

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11645.48	45.36	2.51	47.87	74.00	-26.13	peak	
2	*	11647.12	33.26	2.51	35.77	54.00	-18.23	AVG	

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

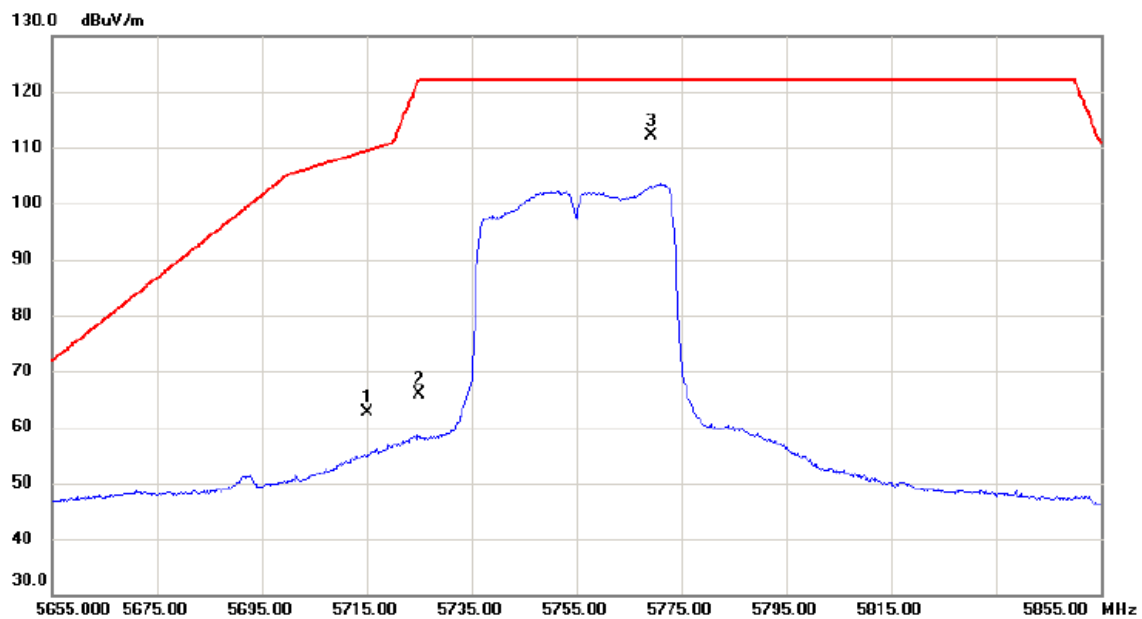


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	63.05	-0.35	62.70	109.40	-46.70	peak	
2		5725.000	66.20	-0.31	65.89	122.20	-56.31	peak	
3	*	5769.400	112.28	-0.20	112.08	122.20	-10.12	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
 5755 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

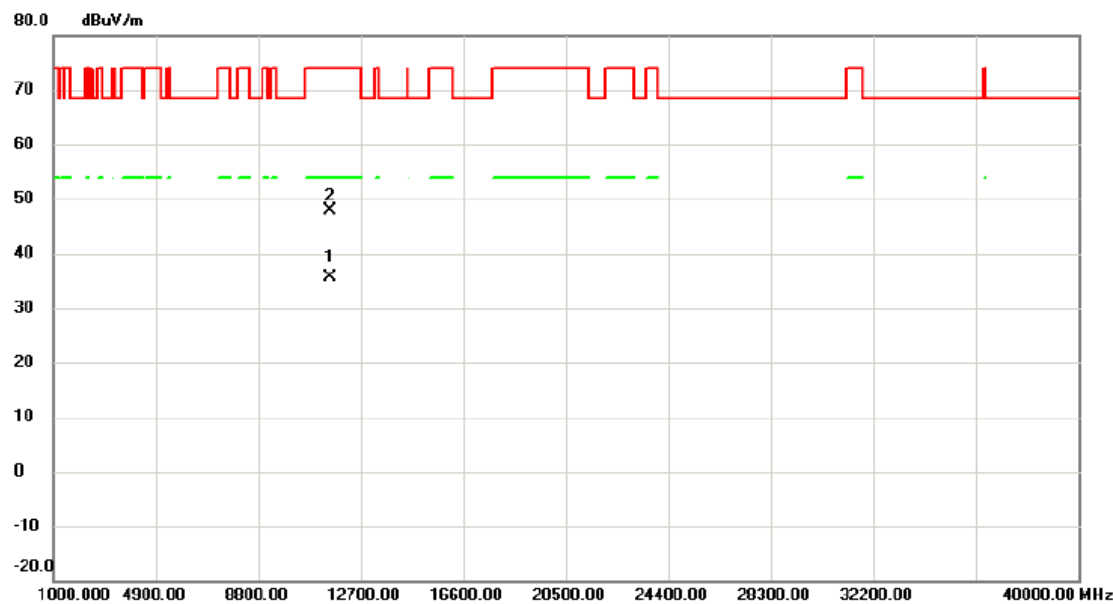


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11512.50	32.82	2.88	35.70	54.00	-18.30	AVG	
2		11513.75	45.03	2.88	47.91	74.00	-26.09	peak	

測試頻道: IEEE 802.11n (HT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

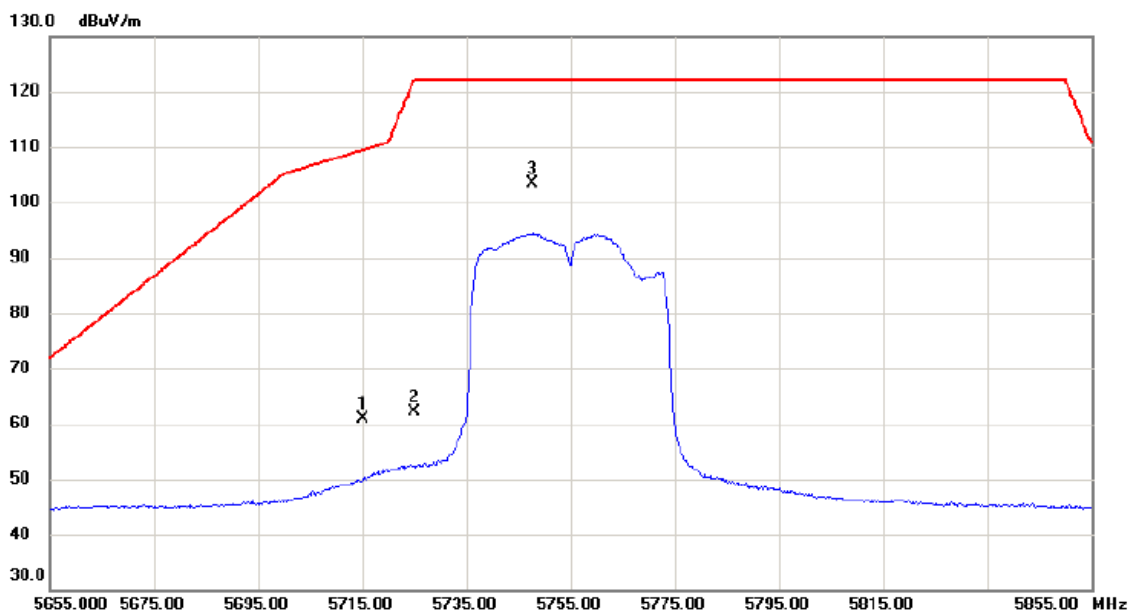


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	61.32	-0.35	60.97	109.40	-48.43	peak	
2		5725.000	62.50	-0.31	62.19	122.20	-60.01	peak	
3	*	5747.600	103.70	-0.25	103.45	122.20	-18.75	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

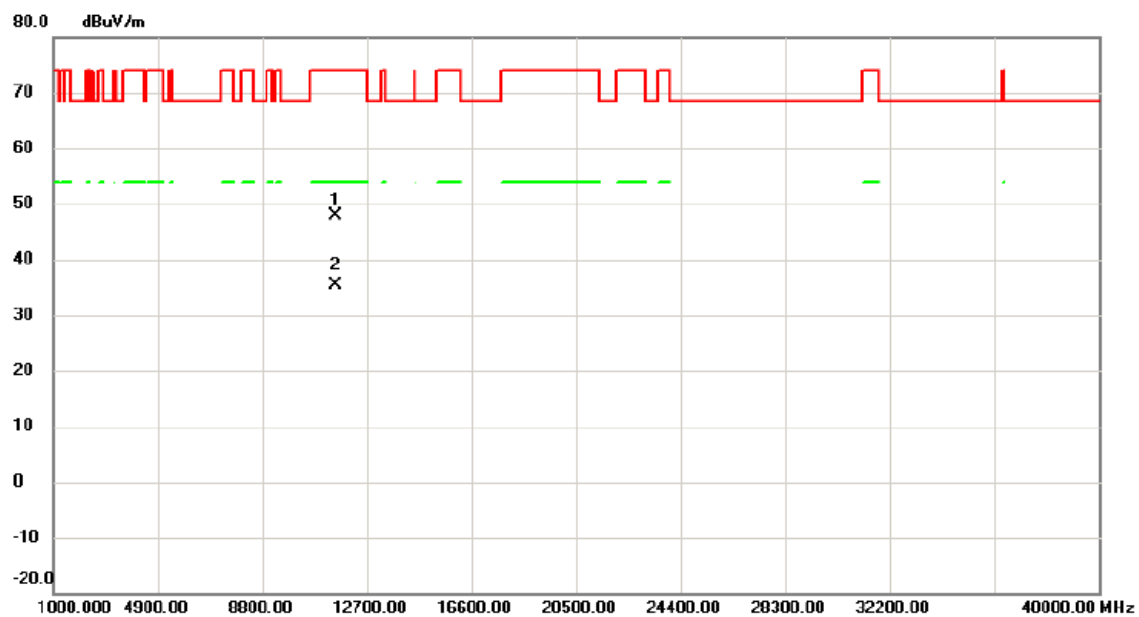


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11514.37	45.05	2.88	47.93	74.00	-26.07	peak	
2	*	11519.38	32.53	2.86	35.39	54.00	-18.61	AVG	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

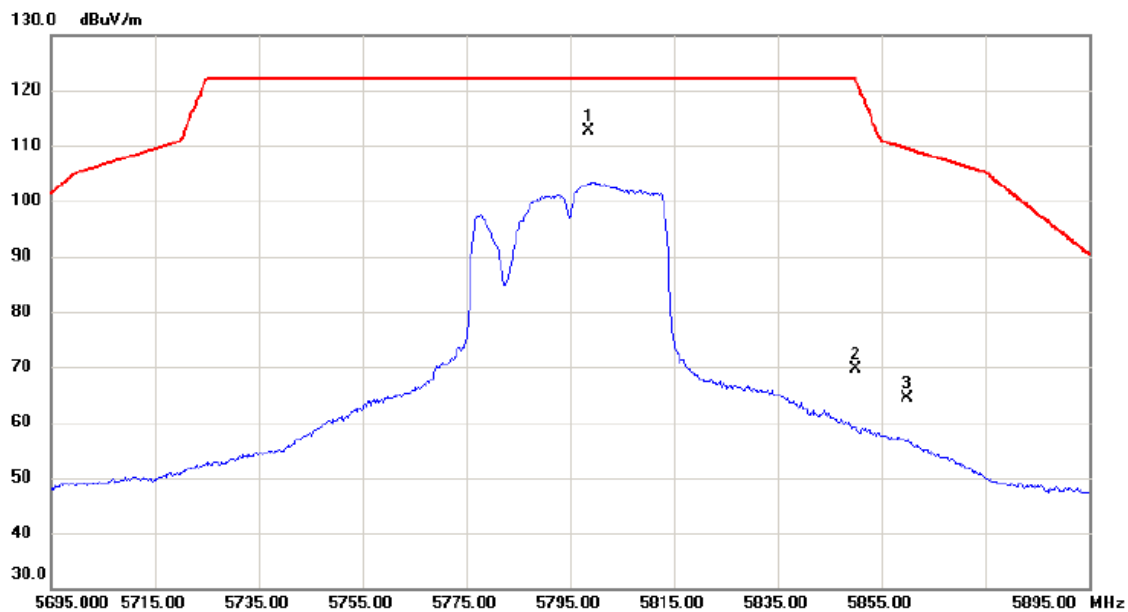

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5798.600	112.73	-0.13	112.60	122.20	-9.60	peak	主波訊號不予判定
2		5850.000	69.75	0.00	69.75	122.20	-52.45	peak	
3		5860.000	64.40	0.03	64.43	109.40	-44.97	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

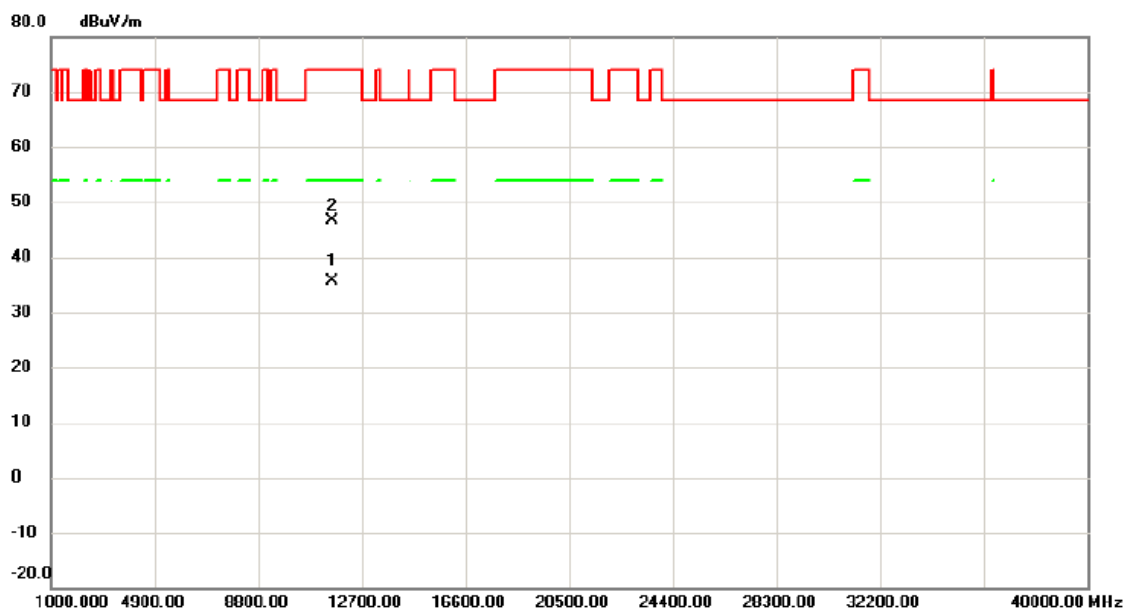


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11581.60	32.99	2.68	35.67	54.00	-18.33	AVG	
2		11589.62	44.02	2.67	46.69	74.00	-27.31	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

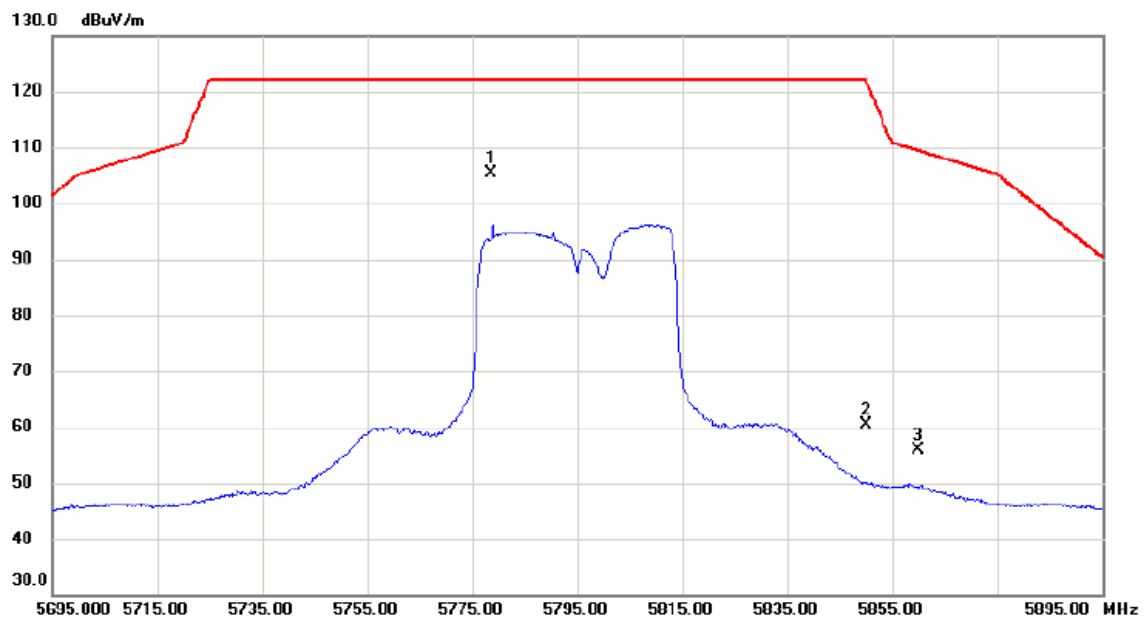

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5778.600	105.44	-0.18	105.26	122.20	-16.94	peak	主波訊號不予判定
2		5850.000	60.41	0.00	60.41	122.20	-61.79	peak	
3		5860.000	55.75	0.03	55.78	109.40	-53.62	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

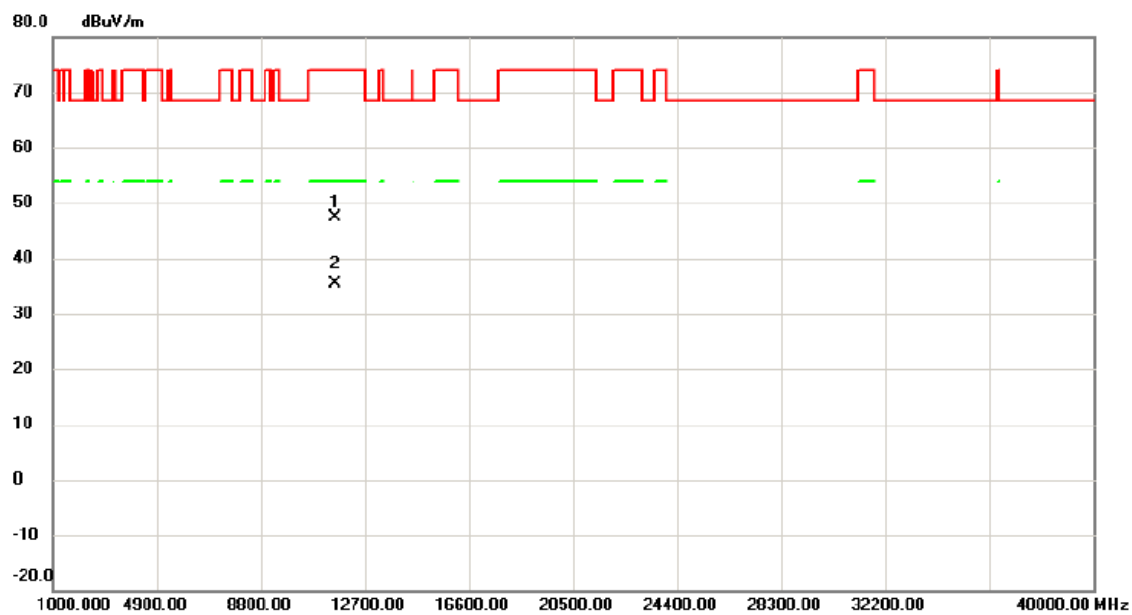


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11581.00	44.58	2.68	47.26	74.00	-26.74	peak	
2	*	11581.36	32.69	2.68	35.37	54.00	-18.63	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

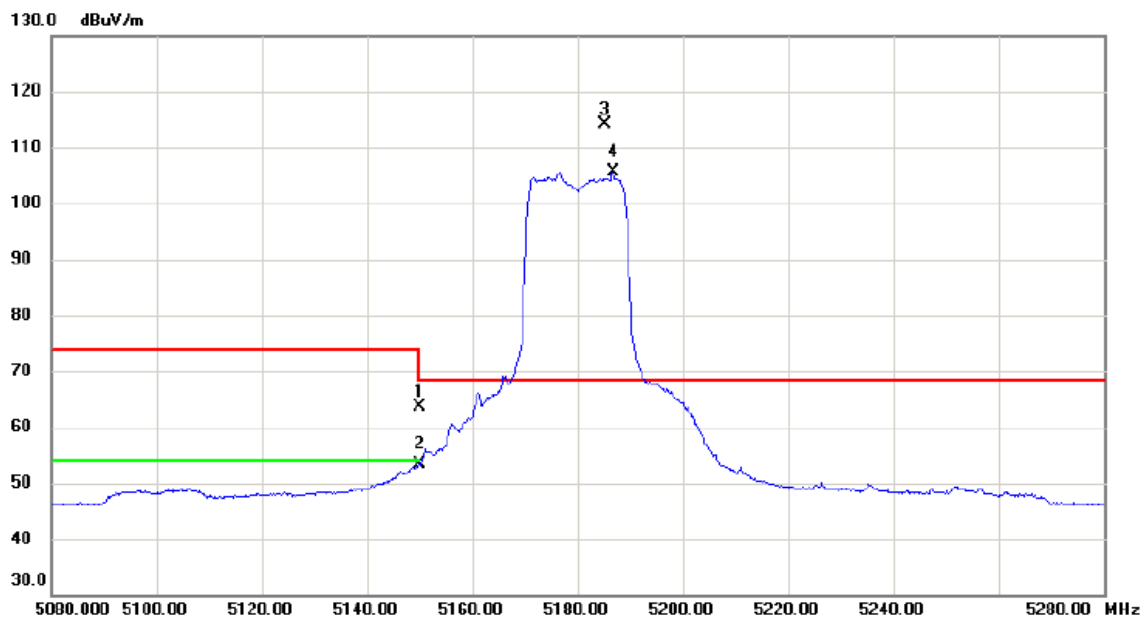


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	64.84	-1.17	63.67	74.00	-10.33	peak	
2		5150.000	54.48	-1.17	53.31	54.00	-0.69	AVG	
3	*	5185.100	115.34	-1.15	114.19	68.30	45.89	peak	主波訊號不予判定
4	X	5186.700	106.89	-1.15	105.74	68.30	37.44	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

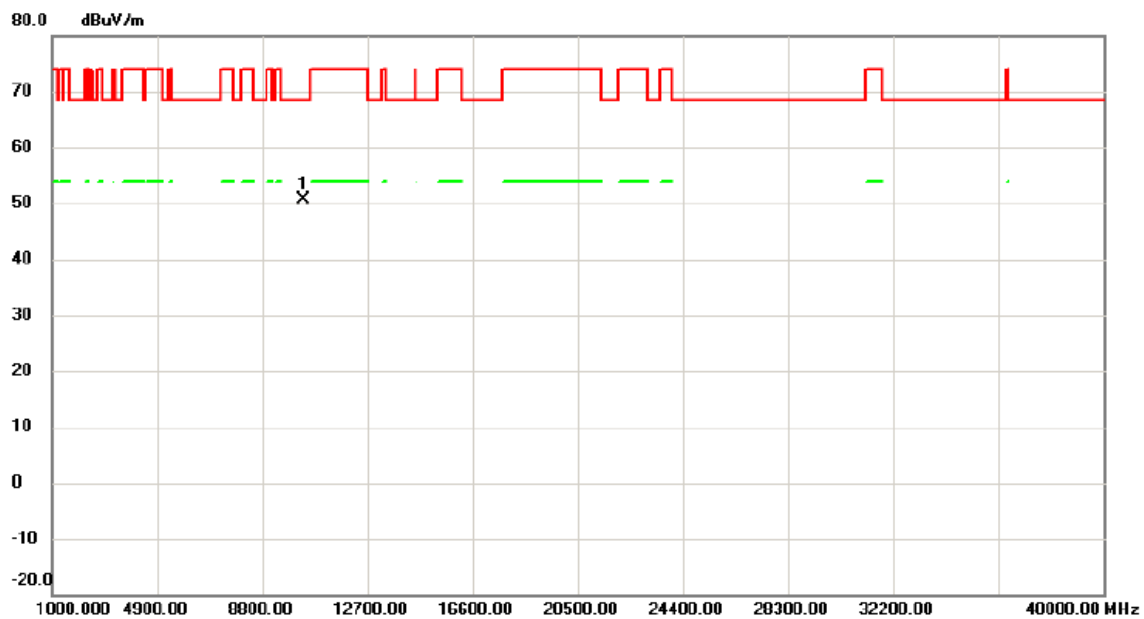

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10354.60	49.07	1.58	50.65	68.30	-17.65	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

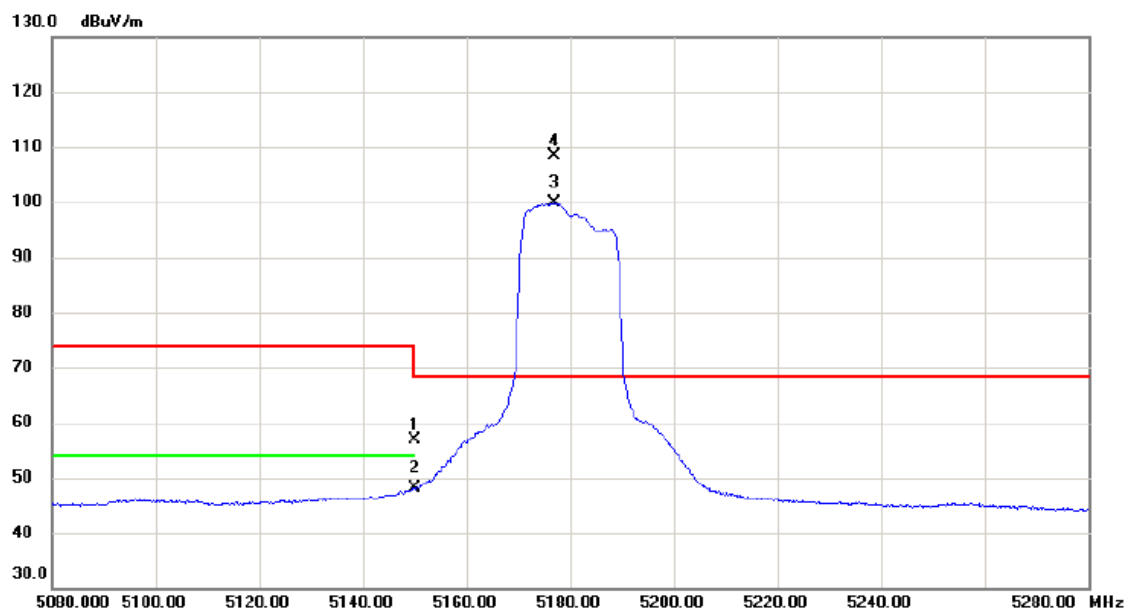


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	58.17	-1.17	57.00	74.00	-17.00	peak	
2		5150.000	49.23	-1.17	48.06	54.00	-5.94	AVG	
3	X	5176.800	100.92	-1.14	99.78	68.30	31.48	AVG	主波訊號不予判定
4	*	5177.000	109.43	-1.14	108.29	68.30	39.99	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
 5180 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

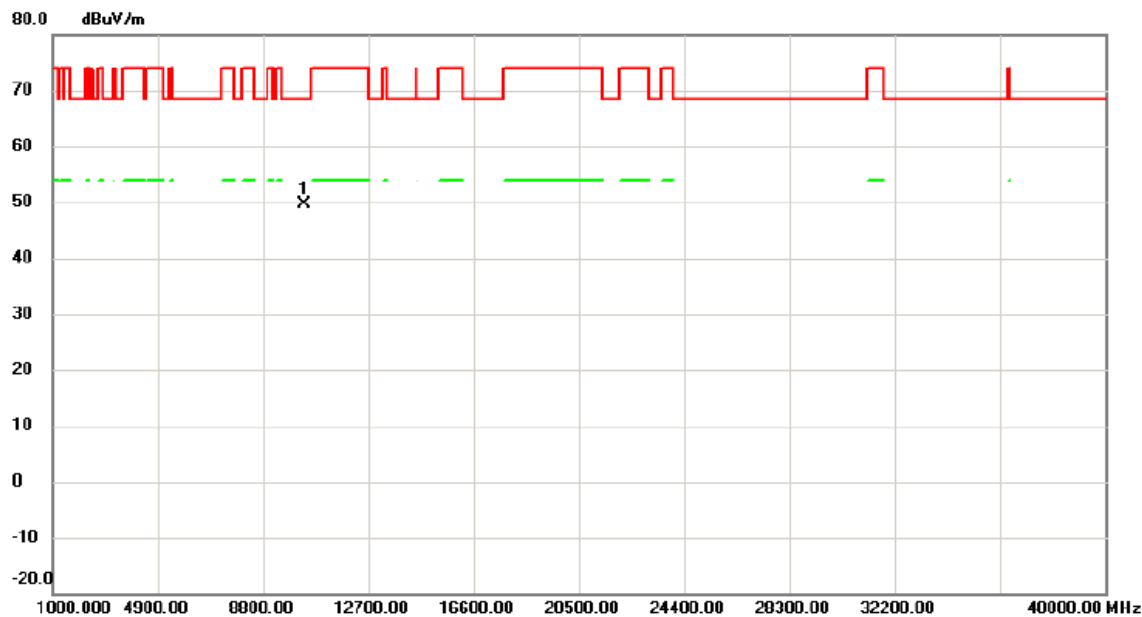


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10358.52	47.97	1.57	49.54	68.30	-18.76	peak	

測試頻道: IEEE 802.11ac (VHT20) /
 5200 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

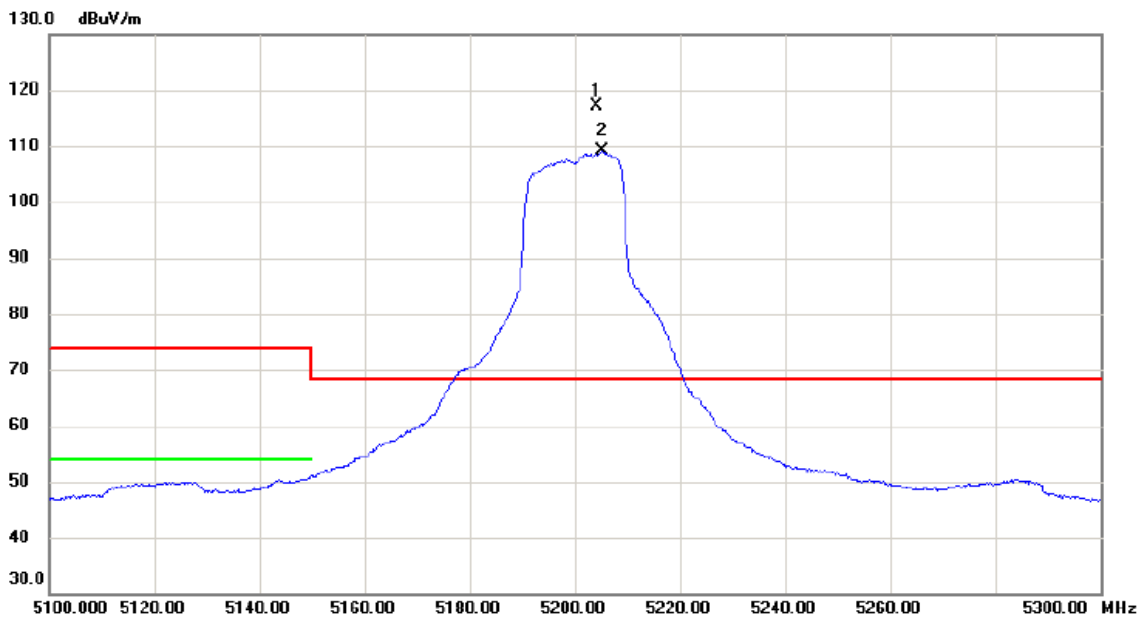


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5204.200	118.18	-1.13	117.05	68.30	48.75	peak	主波訊號不予判定
2	X	5205.300	110.18	-1.13	109.05	68.30	40.75	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

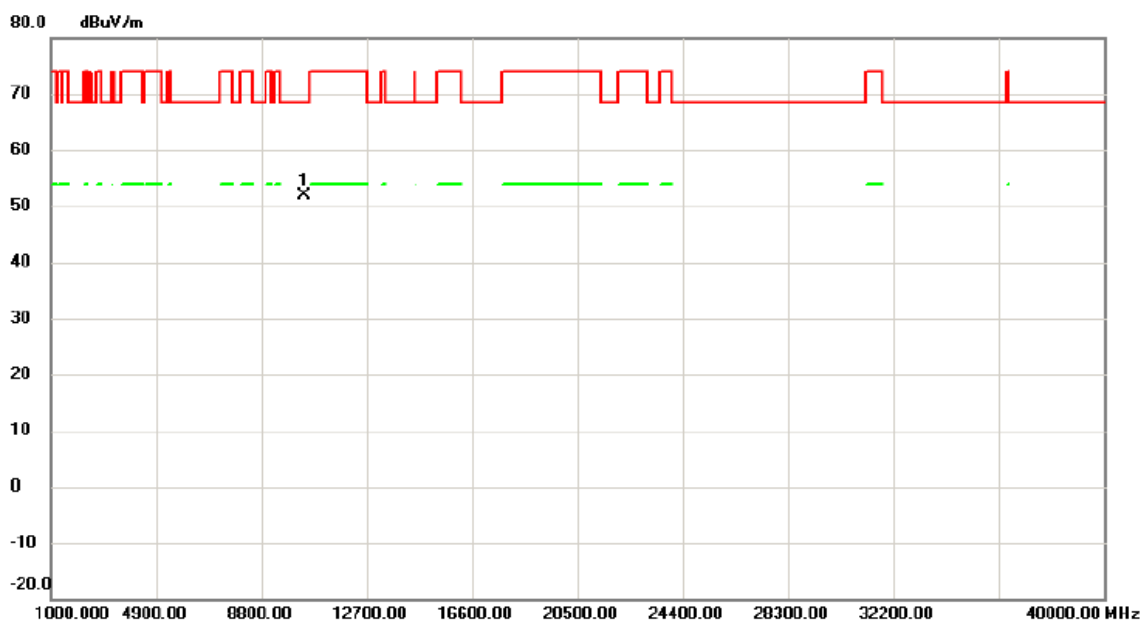


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10399.10	50.35	1.62	51.97	68.30	-16.33	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

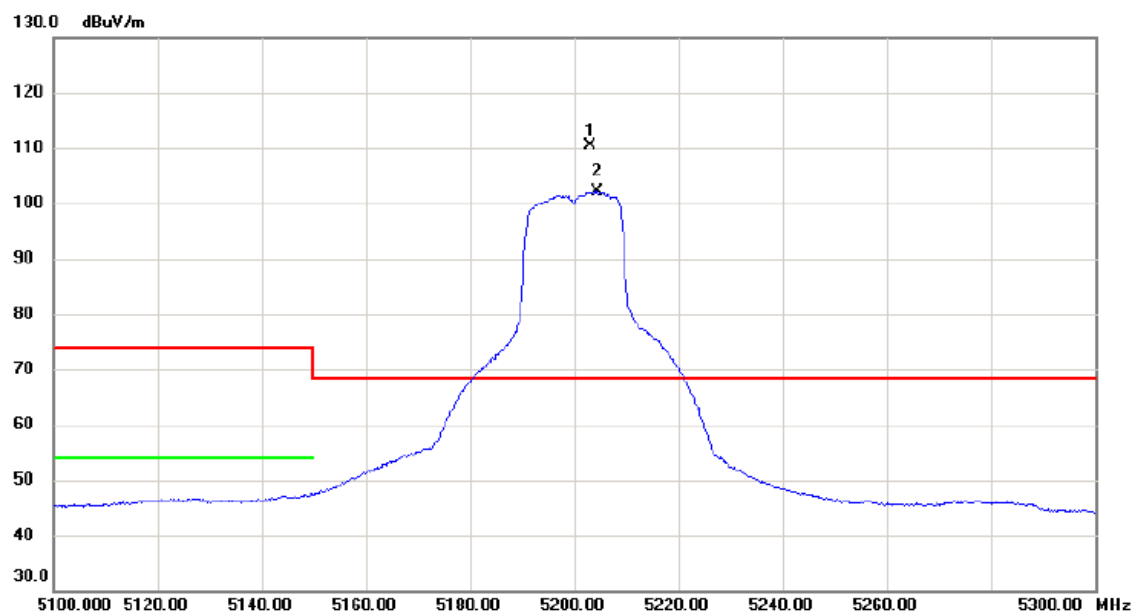

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5203.100	111.39	-1.13	110.26	68.30	41.96	peak	主波訊號不予判定
2	X	5204.300	103.20	-1.13	102.07	68.30	33.77	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

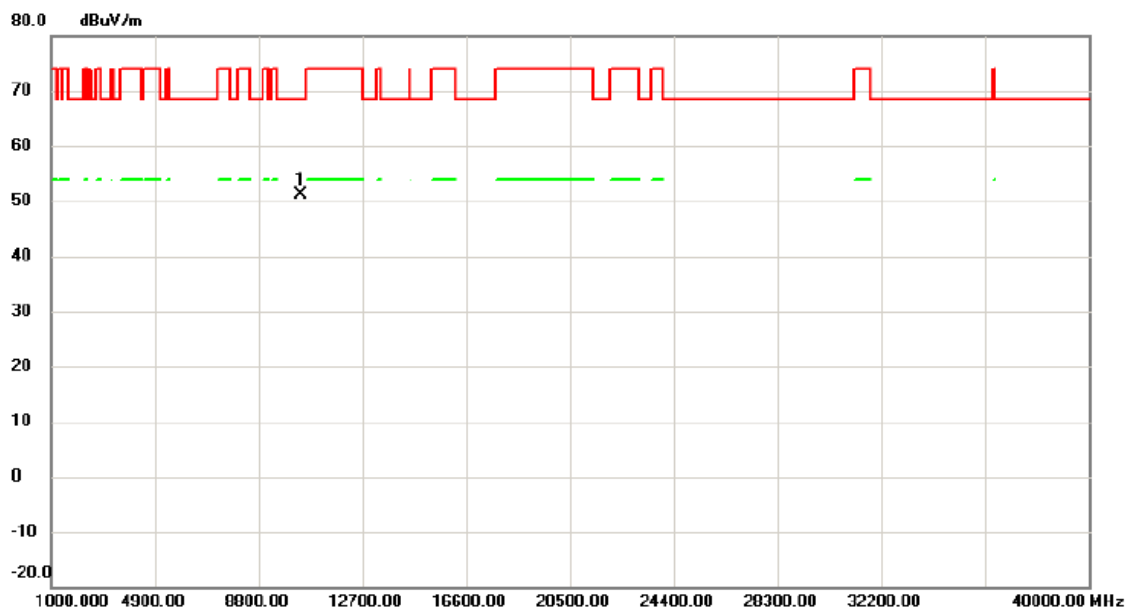


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10410.55	49.43	1.62	51.05	68.30	-17.25	peak	

測試頻道: IEEE 802.11ac (VHT20) /
 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

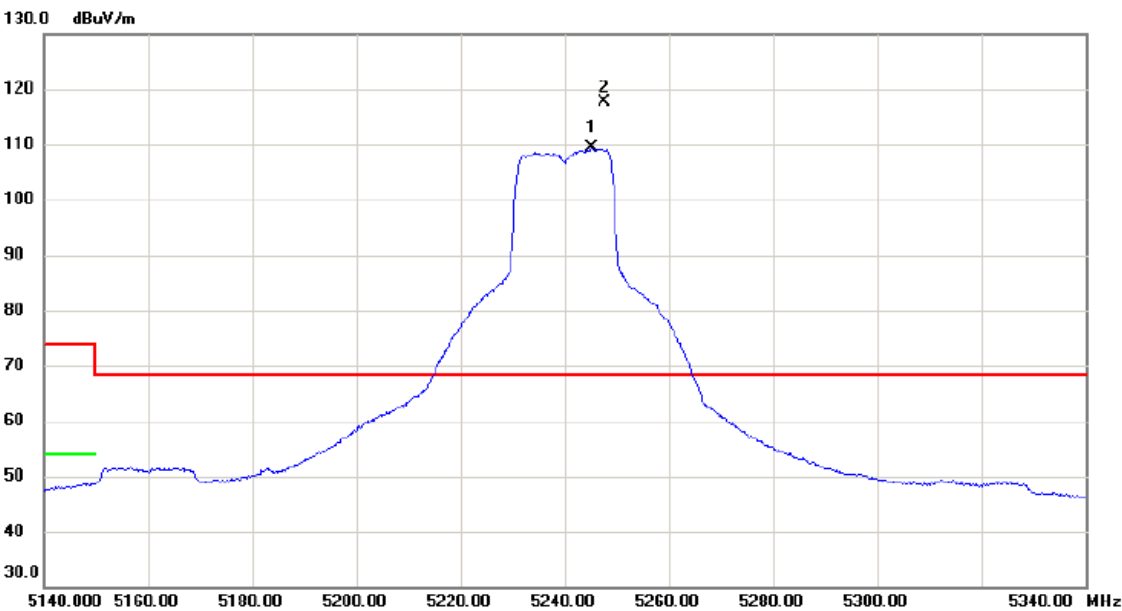


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5245.200	110.40	-1.09	109.31	68.30	41.01	AVG	主波訊號不予判定
2	*	5247.600	118.65	-1.09	117.56	68.30	49.26	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

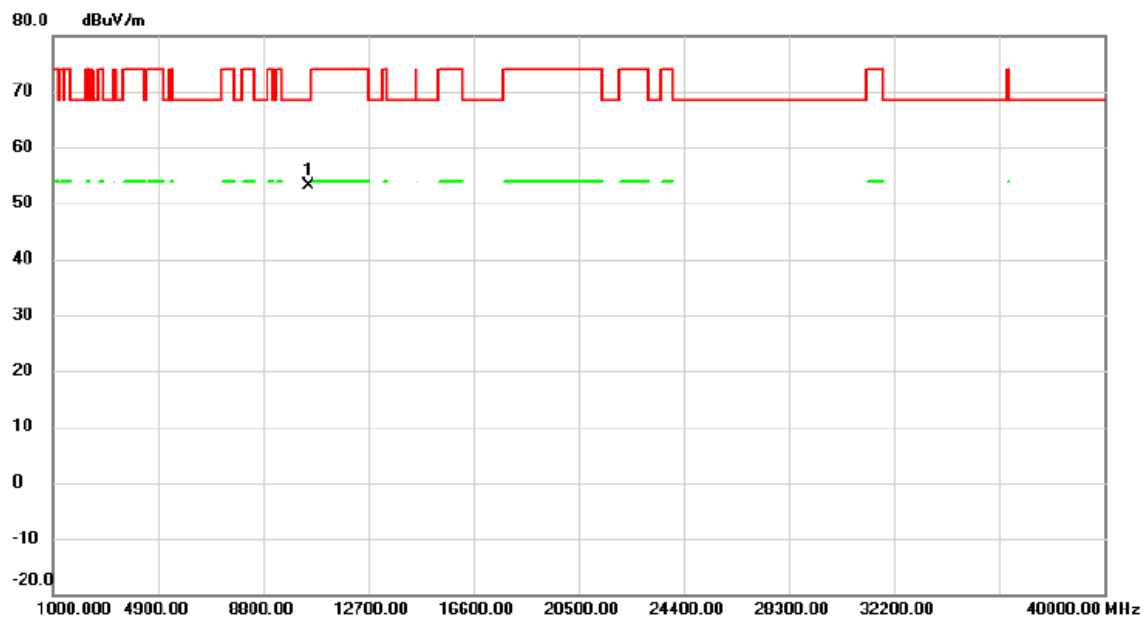

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10479.77	51.37	1.69	53.06	68.30	-15.24	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

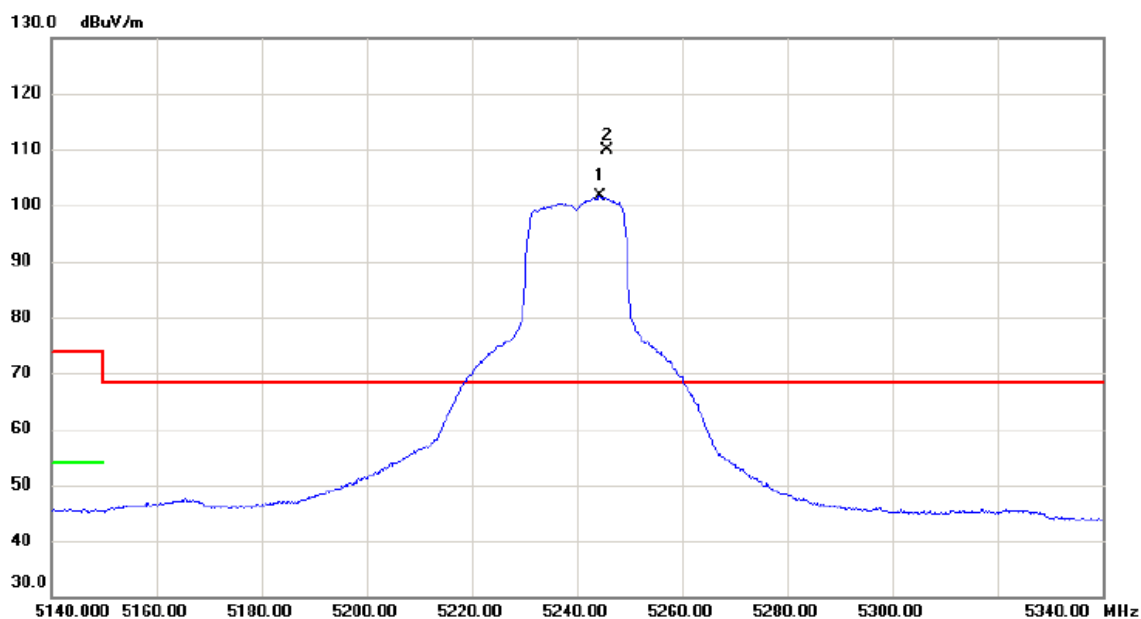


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5244.400	102.74	-1.09	101.65	68.30	33.35	AVG	主波訊號不予判定
2	*	5245.600	111.08	-1.09	109.99	68.30	41.69	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

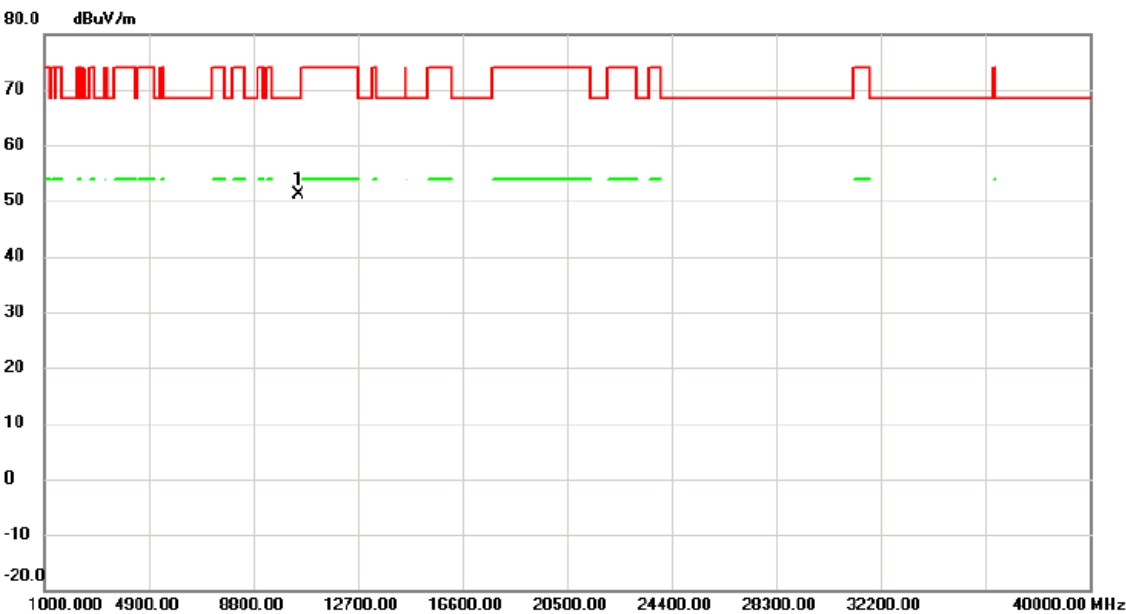

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10479.52	49.38	1.69	51.07	68.30	-17.23	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

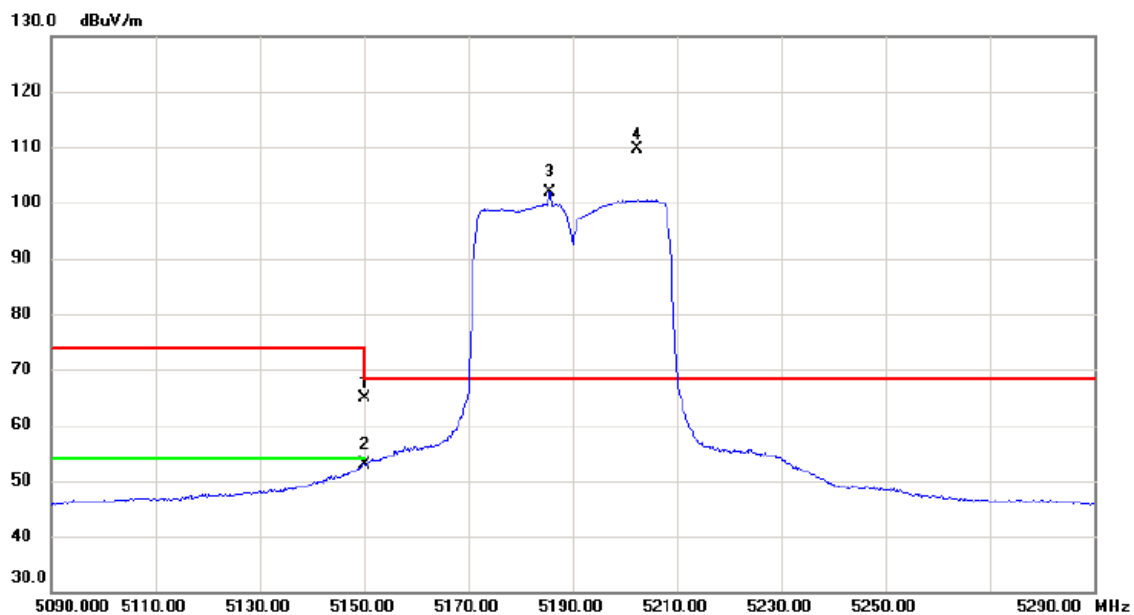


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	65.94	-1.17	64.77	74.00	-9.23	peak	
2		5150.000	54.06	-1.17	52.89	54.00	-1.11	AVG	
3	X	5185.700	102.93	-1.15	101.78	68.30	33.48	AVG	主波訊號不予判定
4	*	5202.300	110.71	-1.13	109.58	68.30	41.28	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
 5190 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

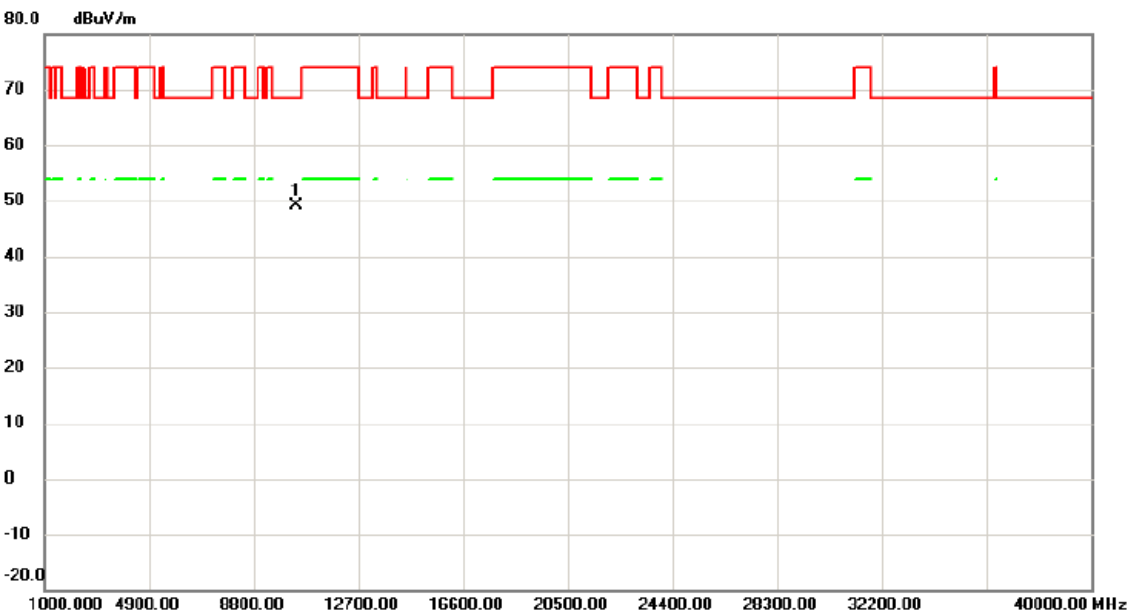

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10376.05	47.46	1.59	49.05	68.30	-19.25	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

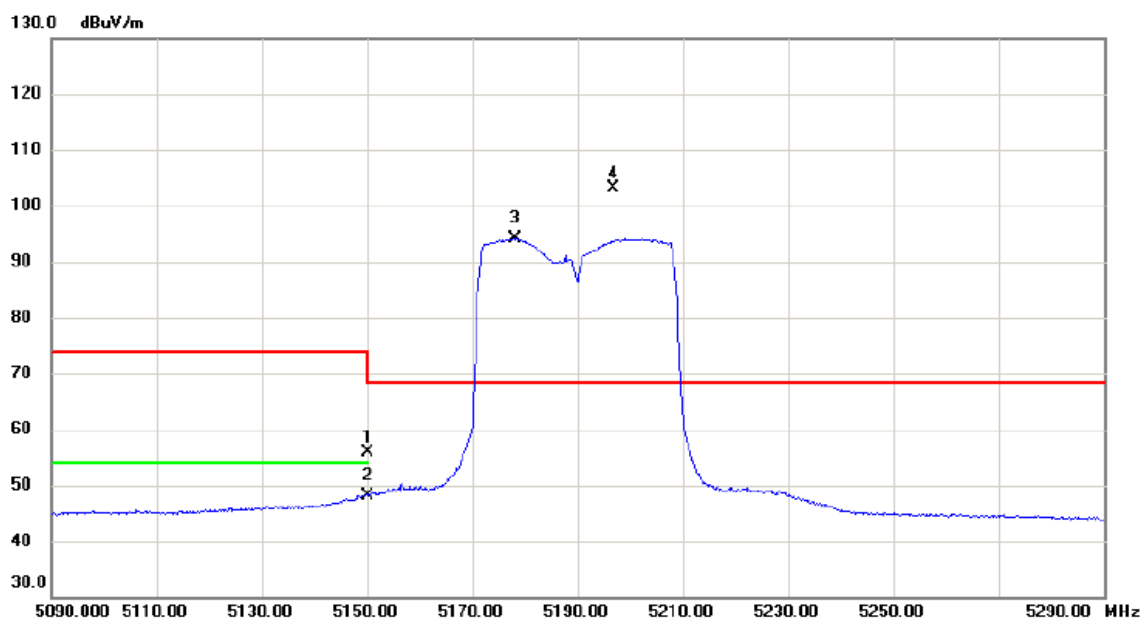


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	57.05	-1.17	55.88	74.00	-18.12	peak	
2		5150.000	49.28	-1.17	48.11	54.00	-5.89	AVG	
3	X	5178.000	95.22	-1.14	94.08	68.30	25.78	AVG	主波訊號不予判定
4	*	5196.800	104.32	-1.13	103.19	68.30	34.89	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

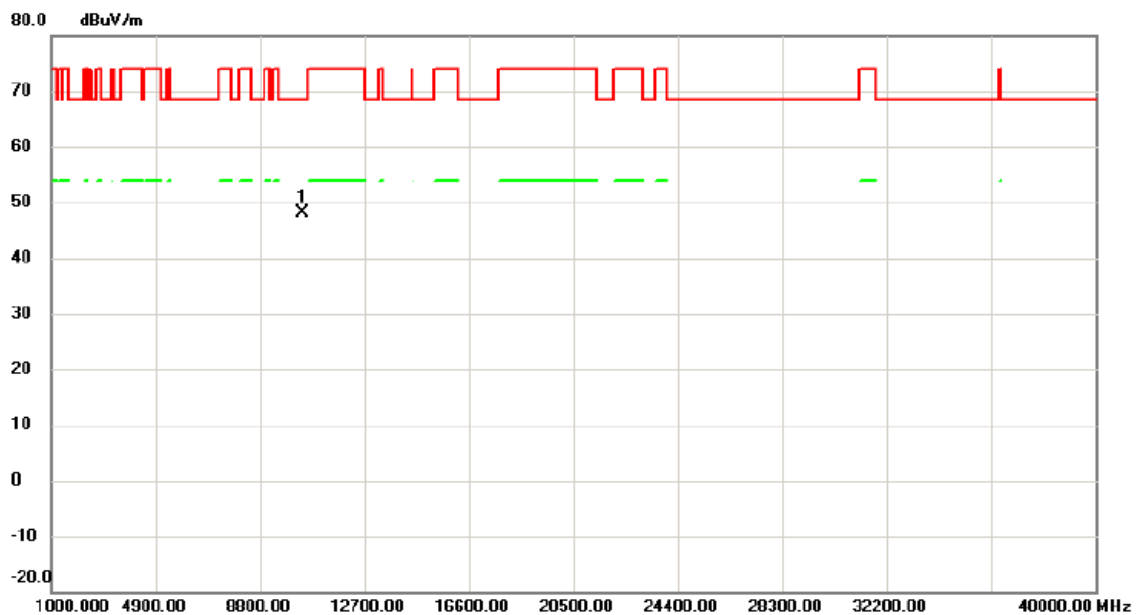

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10393.55	46.58	1.61	48.19	68.30	-20.11	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

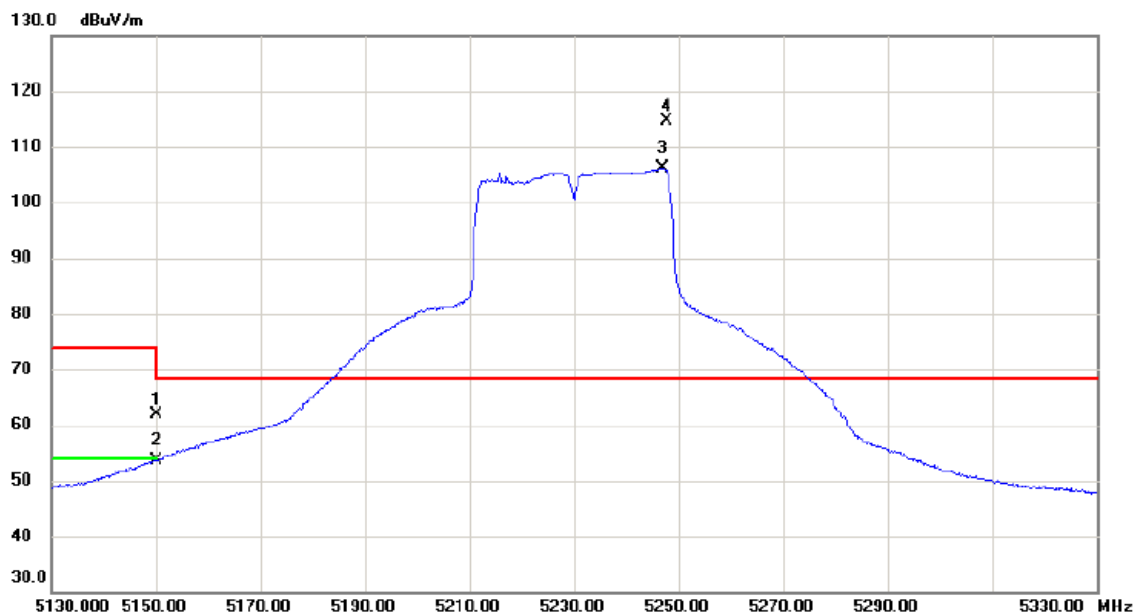

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	63.09	-1.17	61.92	74.00	-12.08	peak	
2		5150.000	54.80	-1.17	53.63	54.00	-0.37	AVG	
3	X	5246.800	107.31	-1.09	106.22	68.30	37.92	AVG	主波訊號不予判定
4	*	5247.600	115.73	-1.09	114.64	68.30	46.34	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

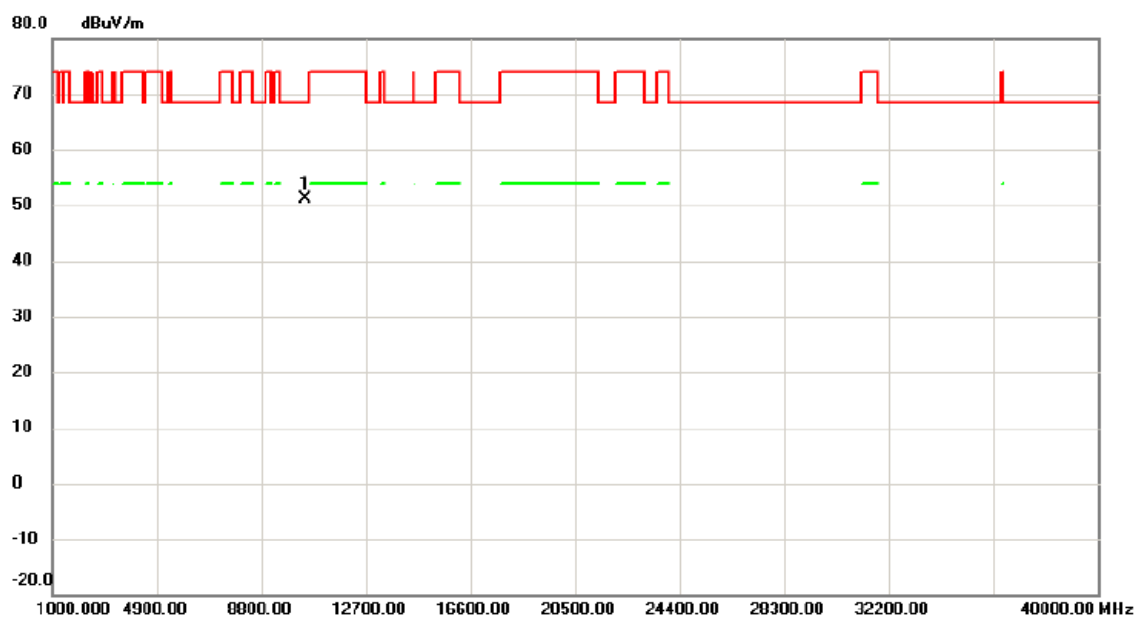

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10461.00	49.53	1.69	51.22	68.30	-17.08	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

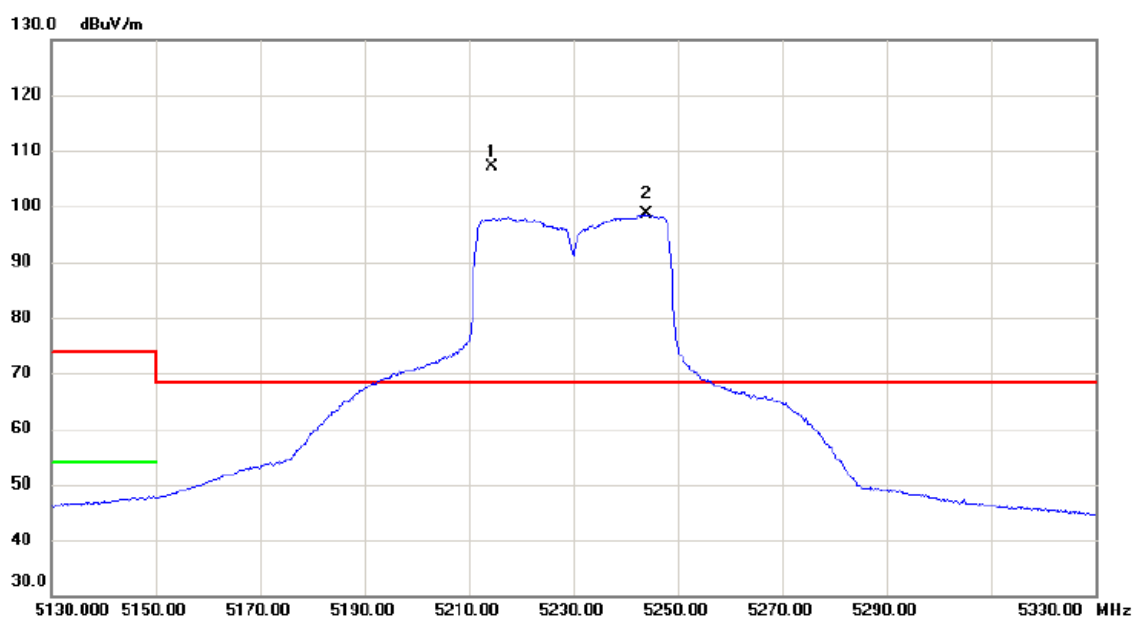


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5214.400	108.20	-1.12	107.08	68.30	38.78	peak	主波訊號不予判定
2	X	5243.900	99.62	-1.09	98.53	68.30	30.23	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

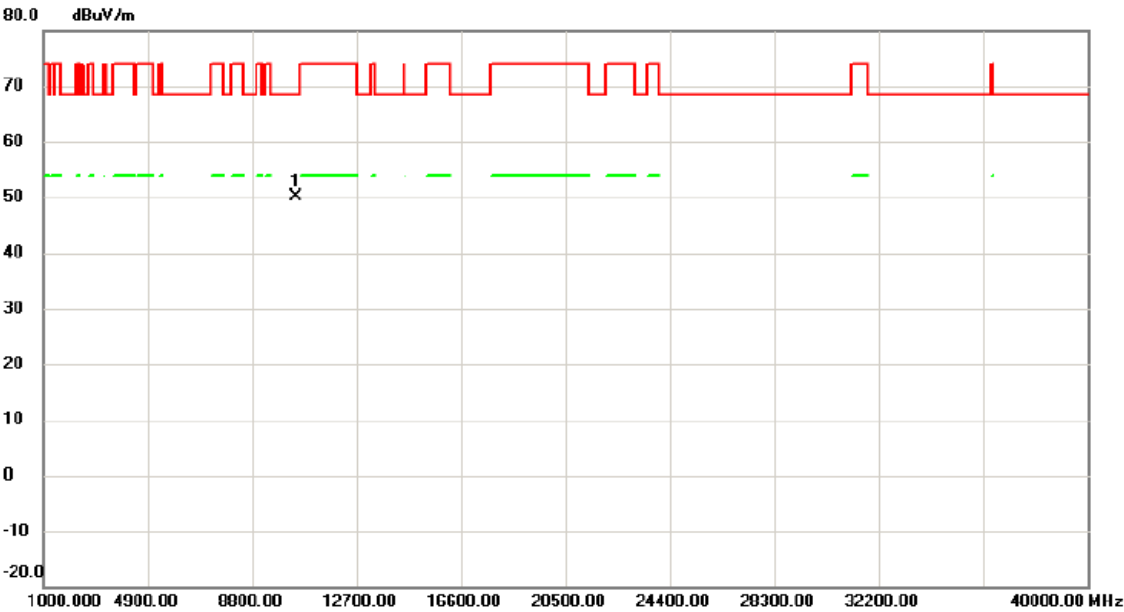

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10462.30	48.34	1.68	50.02	68.30	-18.28	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

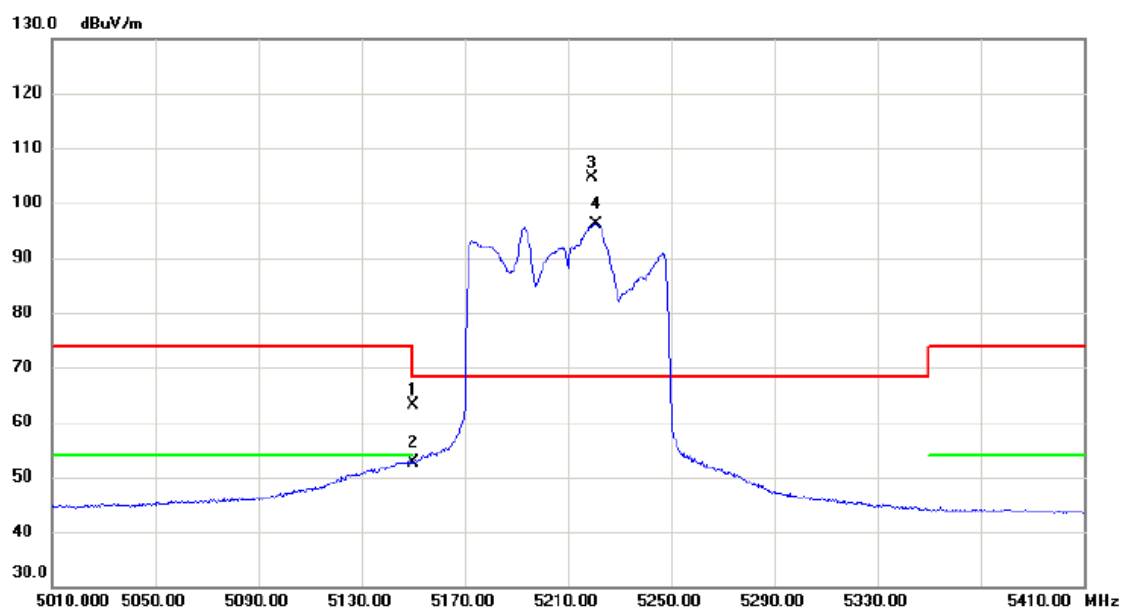


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	64.21	-1.17	63.04	74.00	-10.96	peak	
2		5150.000	53.90	-1.17	52.73	54.00	-1.27	AVG	
3	*	5219.400	105.80	-1.12	104.68	68.30	36.38	peak	主波訊號不予判定
4	X	5220.800	97.25	-1.12	96.13	68.30	27.83	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

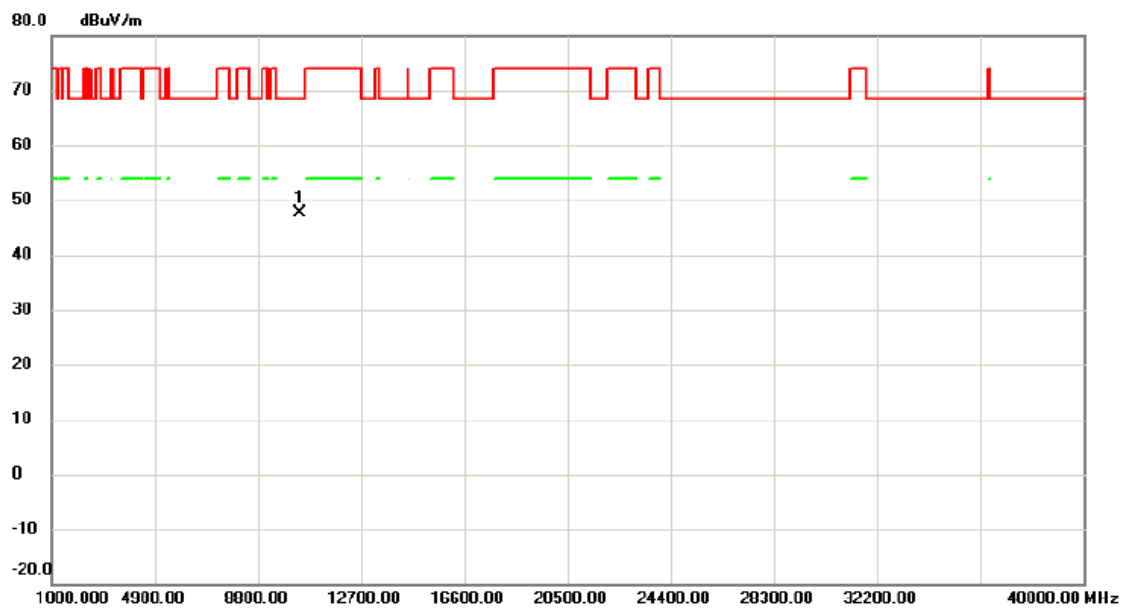


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10378.70	45.98	1.59	47.57	68.30	-20.73	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

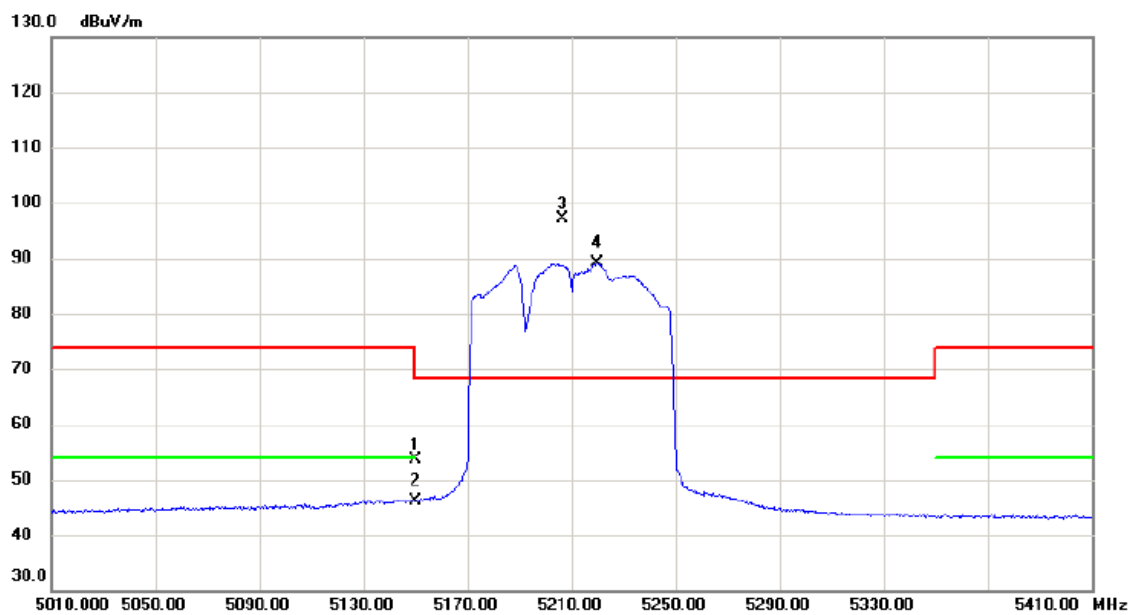


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	54.75	-1.17	53.58	74.00	-20.42	peak	
2		5150.000	47.33	-1.17	46.16	54.00	-7.84	AVG	
3	*	5206.400	98.27	-1.13	97.14	68.30	28.84	peak	主波訊號不予判定
4	X	5220.000	90.37	-1.12	89.25	68.30	20.95	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
 5210 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

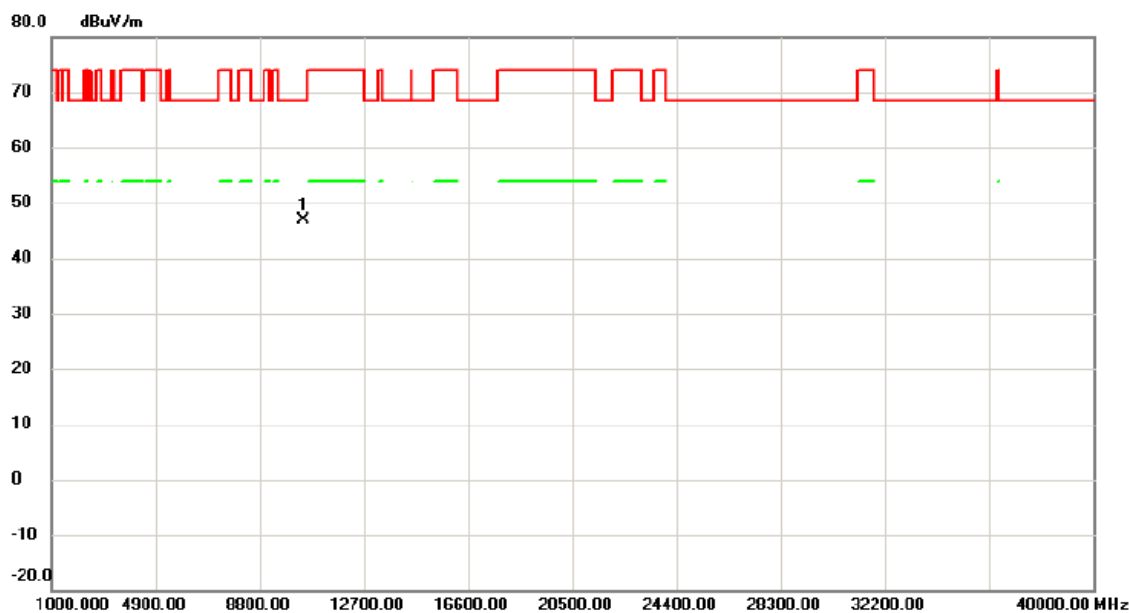


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10458.70	45.20	1.68	46.88	68.30	-21.42	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

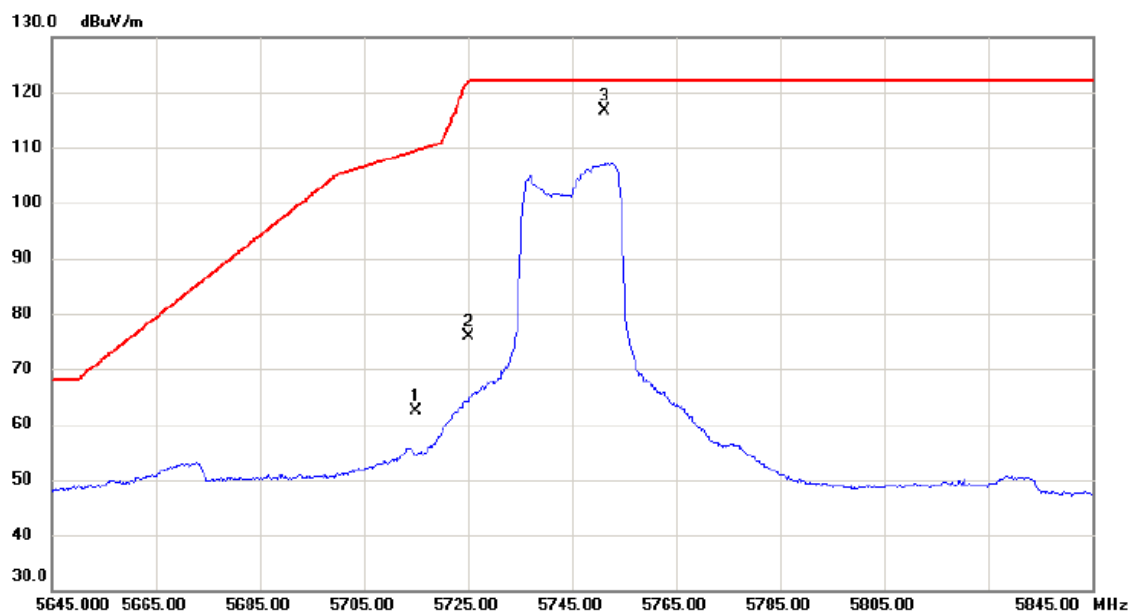


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	62.65	-0.35	62.30	109.40	-47.10	peak	
2		5725.000	76.19	-0.31	75.88	122.20	-46.32	peak	
3	*	5751.300	116.92	-0.25	116.67	122.20	-5.53	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

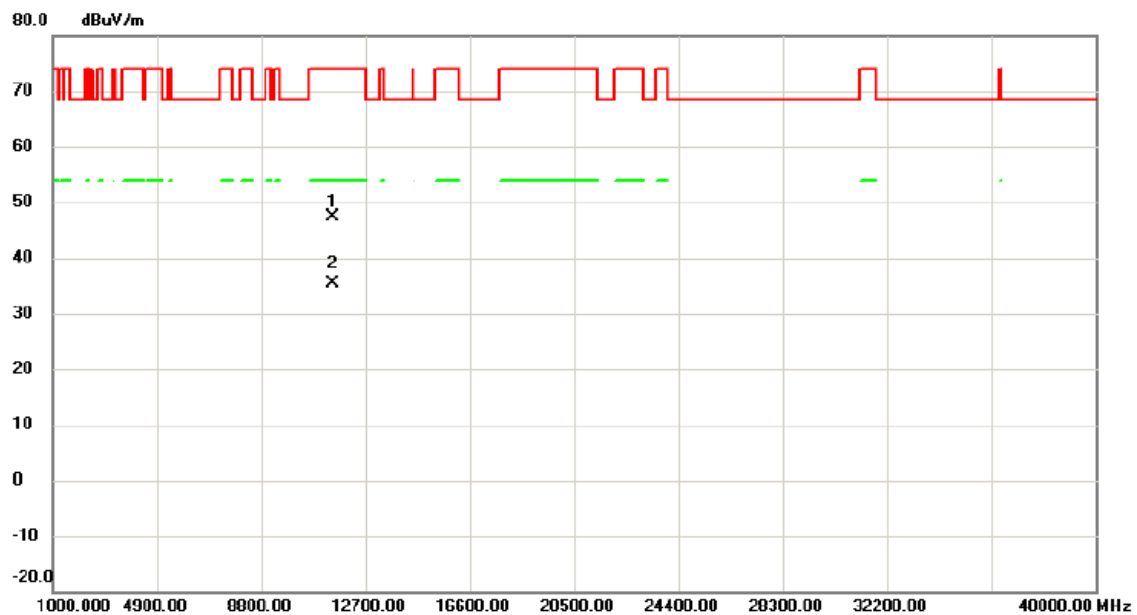


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11491.05	44.58	2.89	47.47	74.00	-26.53	peak	
2	*	11498.13	32.56	2.91	35.47	54.00	-18.53	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

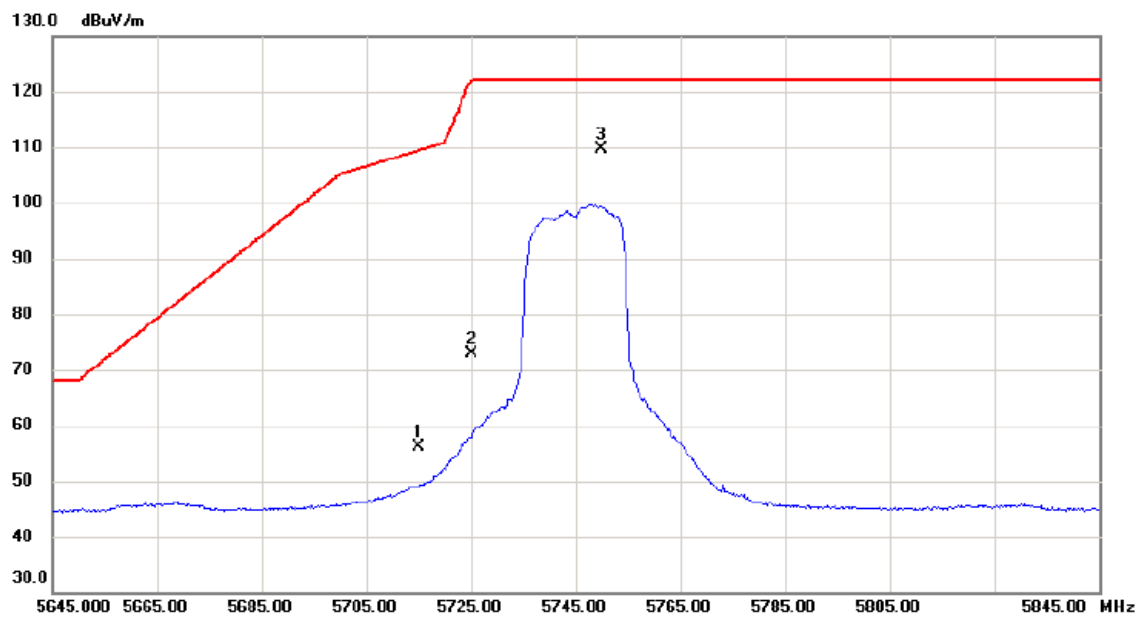


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	56.44	-0.35	56.09	109.40	-53.31	peak	
2		5725.000	73.18	-0.31	72.87	122.20	-49.33	peak	
3	*	5749.800	109.77	-0.25	109.52	122.20	-12.68	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X Polarization: Horizontal

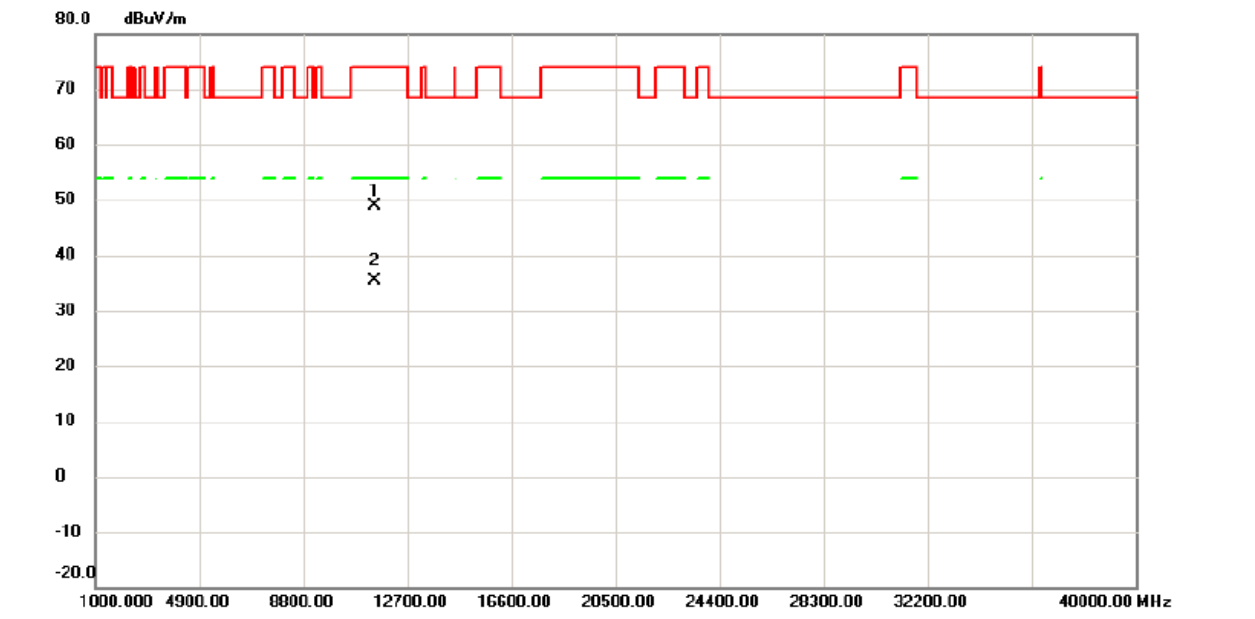

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11499.41	46.04	2.91	48.95	74.00	-25.05	peak	
2	*	11499.49	32.40	2.91	35.31	54.00	-18.69	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

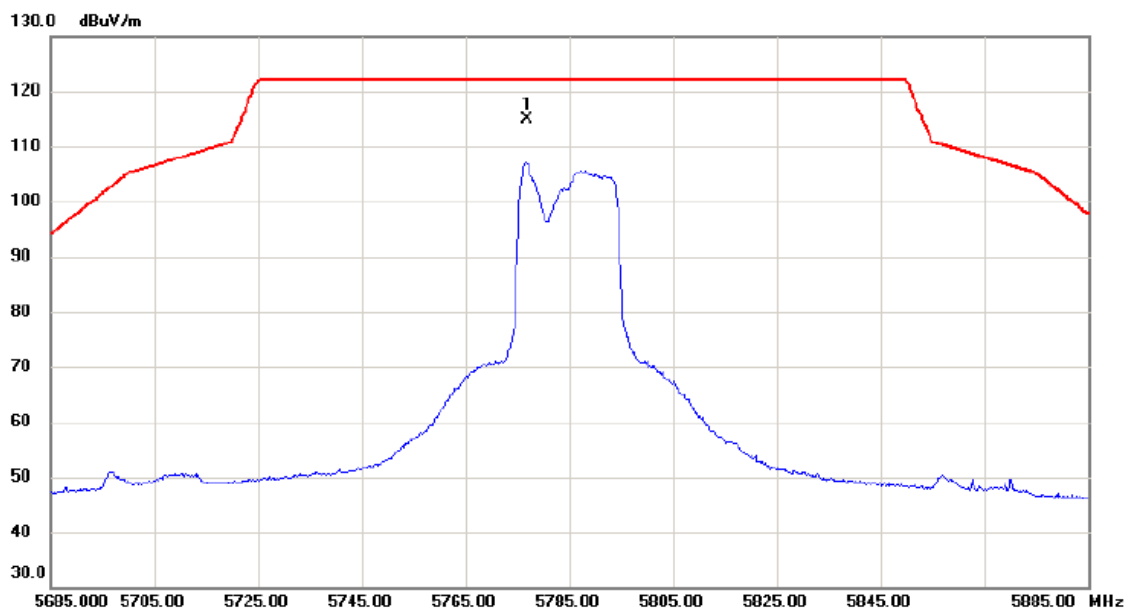


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5776.900	115.16	-0.19	114.97	122.20	-7.23	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

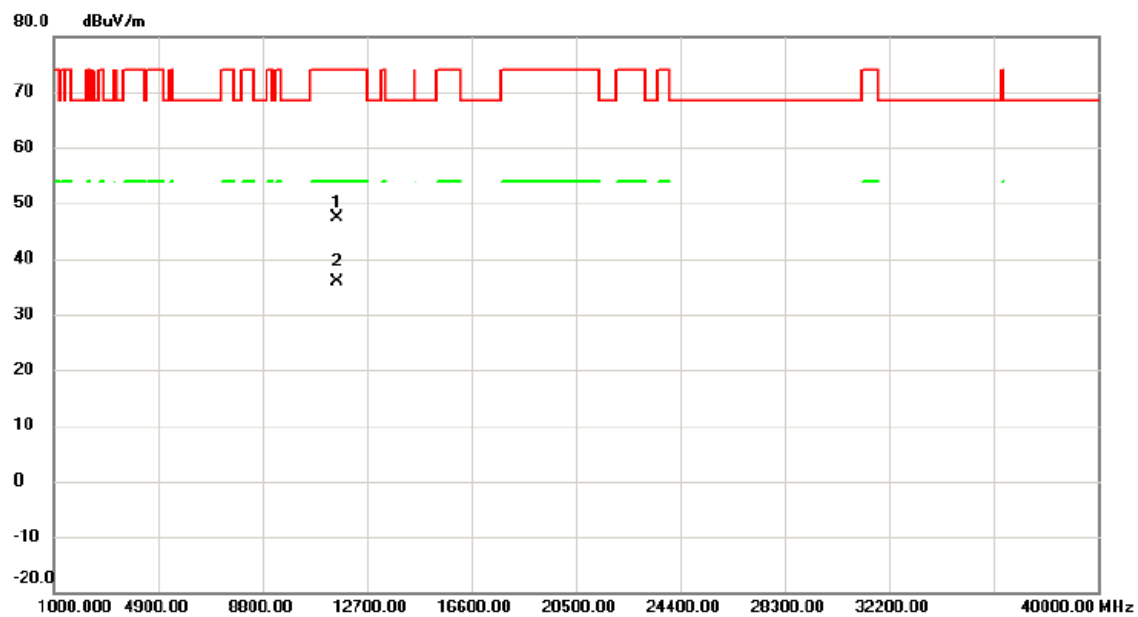


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11568.30	44.66	2.73	47.39	74.00	-26.61	peak	
2	*	11573.31	33.08	2.71	35.79	54.00	-18.21	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

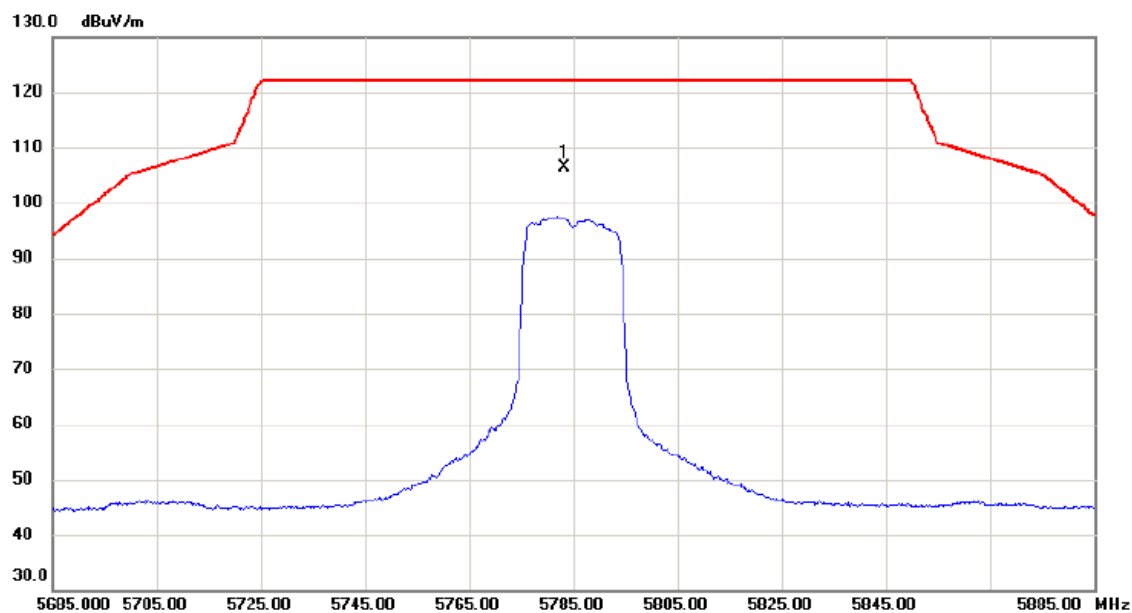


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5783.400	106.59	-0.17	106.42	122.20	-15.78	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

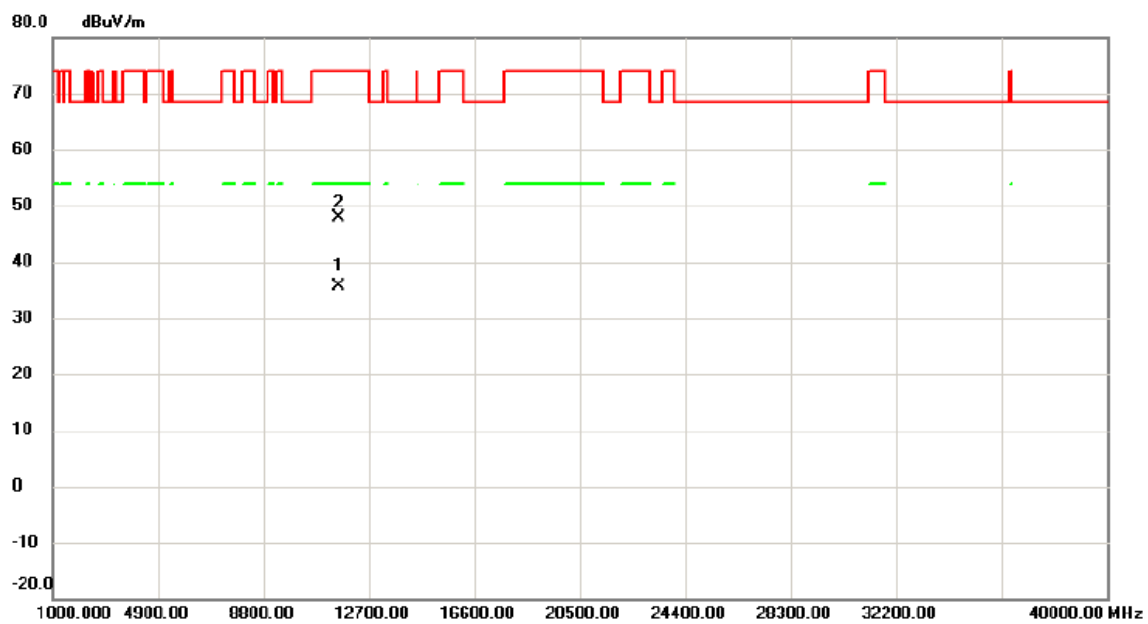


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11569.97	32.93	2.72	35.65	54.00	-18.35	AVG	
2		11576.28	45.07	2.70	47.77	74.00	-26.23	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

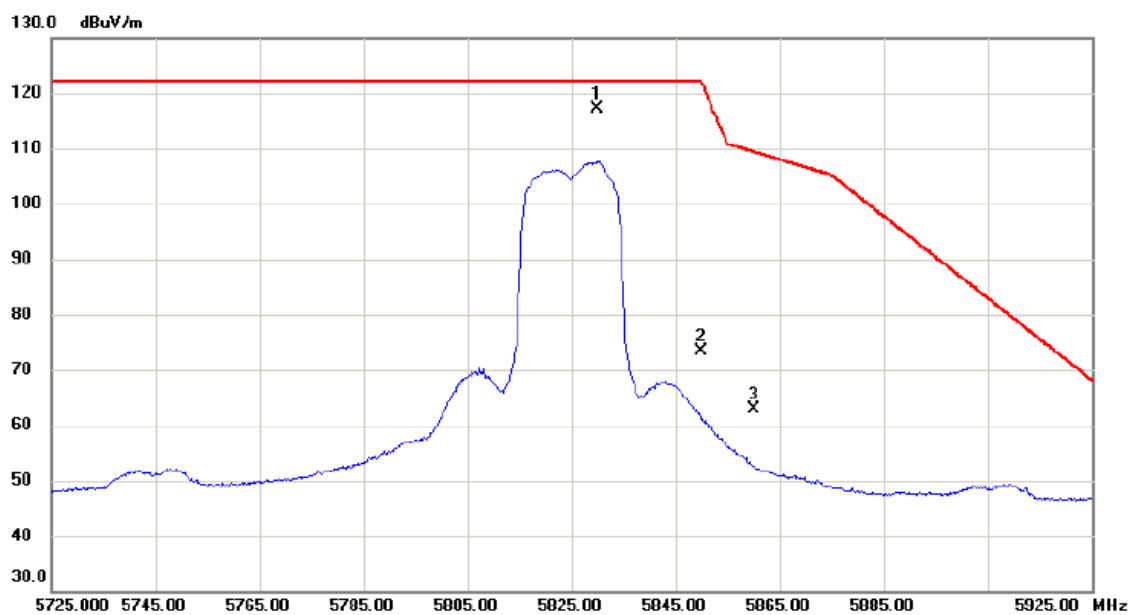


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5830.000	117.21	-0.04	117.17	122.20	-5.03	peak	主波訊號不予判定
2		5850.000	73.47	0.00	73.47	122.20	-48.73	peak	
3		5860.000	62.81	0.03	62.84	109.40	-46.56	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

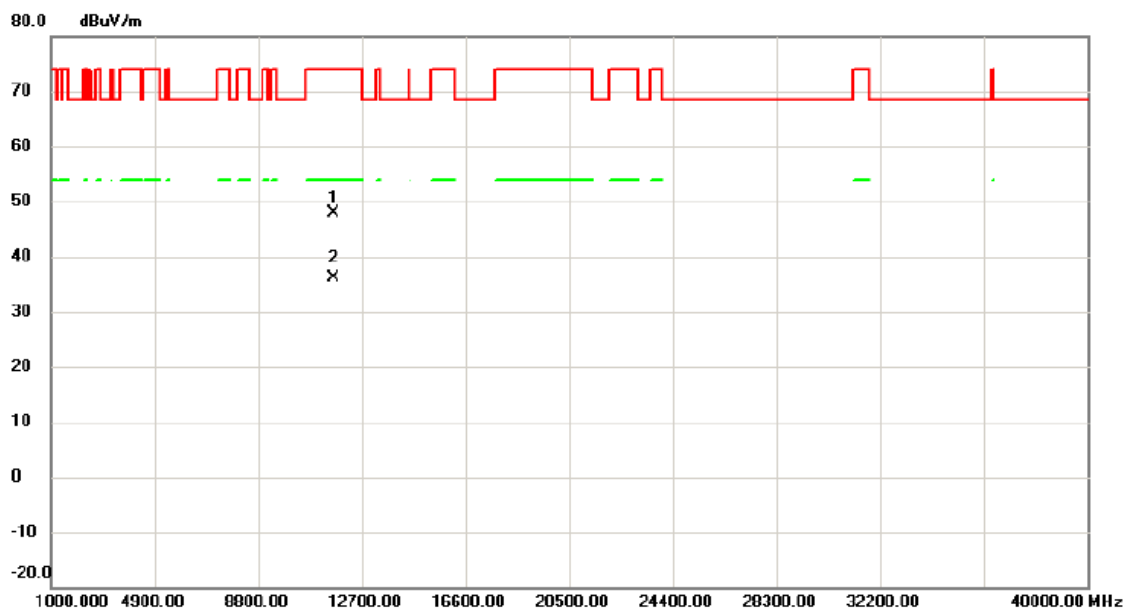


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11645.26	45.49	2.51	48.00	74.00	-26.00	peak	
2	*	11648.54	33.64	2.50	36.14	54.00	-17.86	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

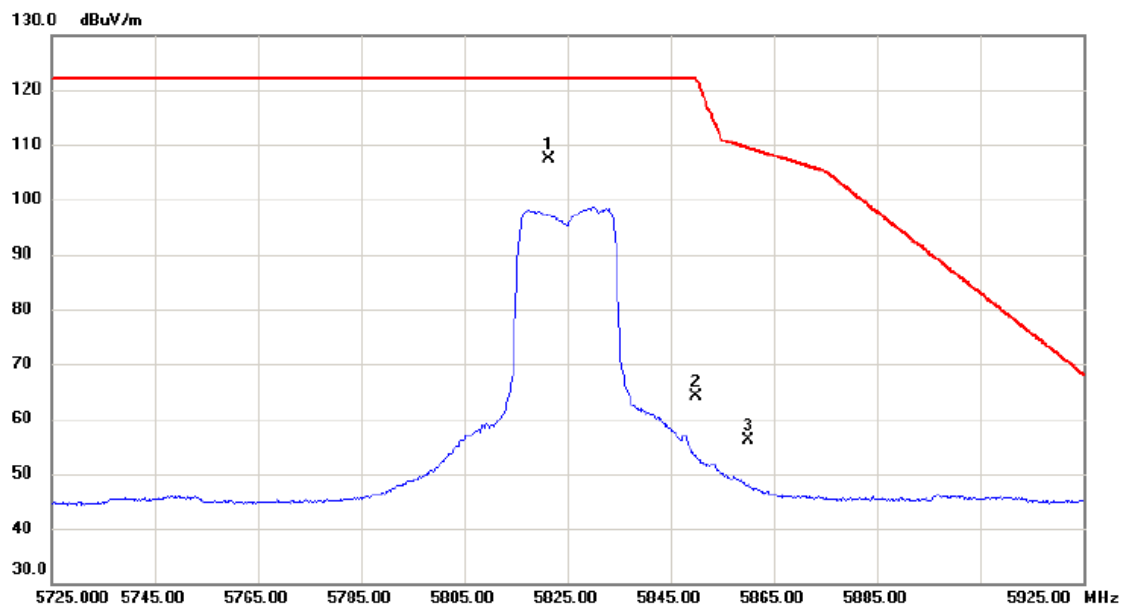


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5821.400	107.56	-0.08	107.48	122.20	-14.72	peak	主波訊號不予判定
2		5850.000	64.24	0.00	64.24	122.20	-57.96	peak	
3		5860.000	56.10	0.03	56.13	109.40	-53.27	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

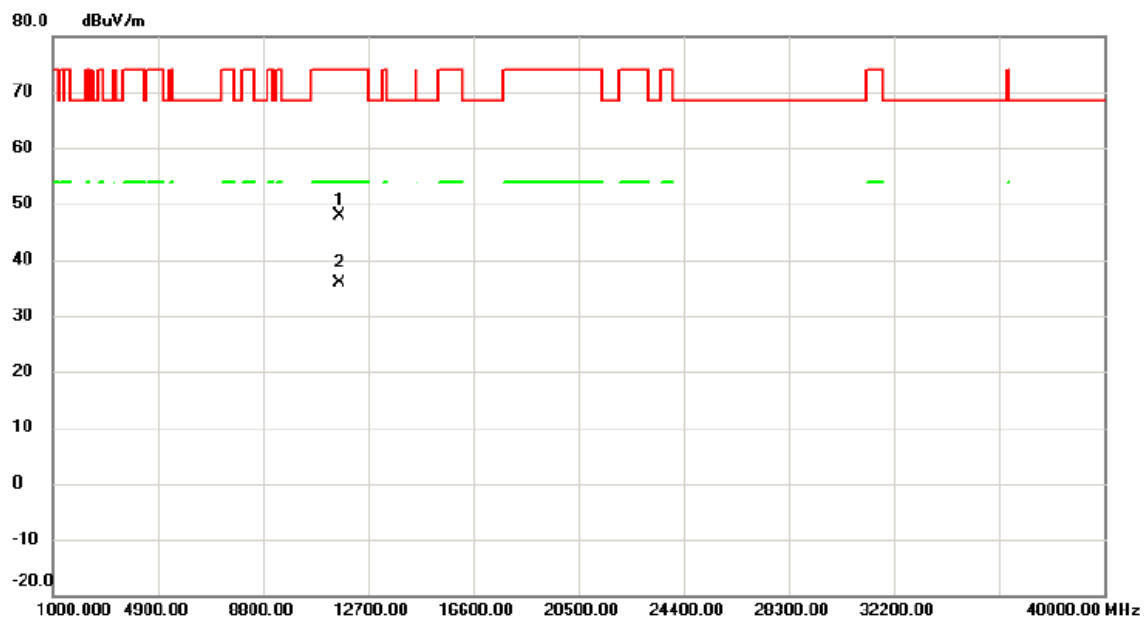


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11643.57	45.25	2.52	47.77	74.00	-26.23	peak	
2	*	11653.58	33.37	2.49	35.86	54.00	-18.14	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

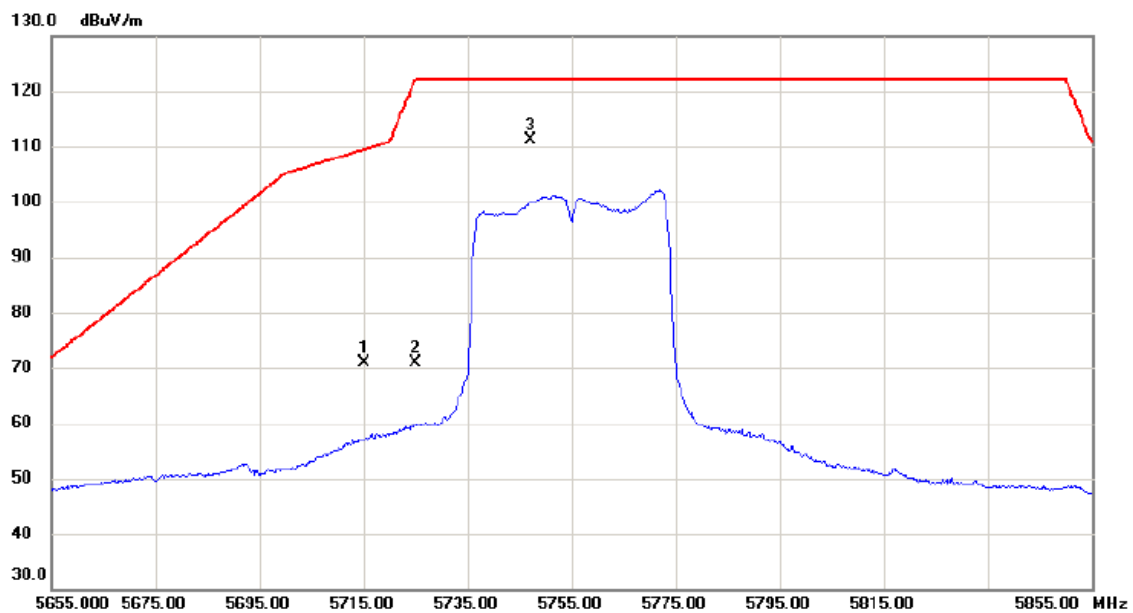


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	71.20	-0.35	70.85	109.40	-38.55	peak	
2		5725.000	71.20	-0.31	70.89	122.20	-51.31	peak	
3	*	5747.200	111.34	-0.25	111.09	122.20	-11.11	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
 5755 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

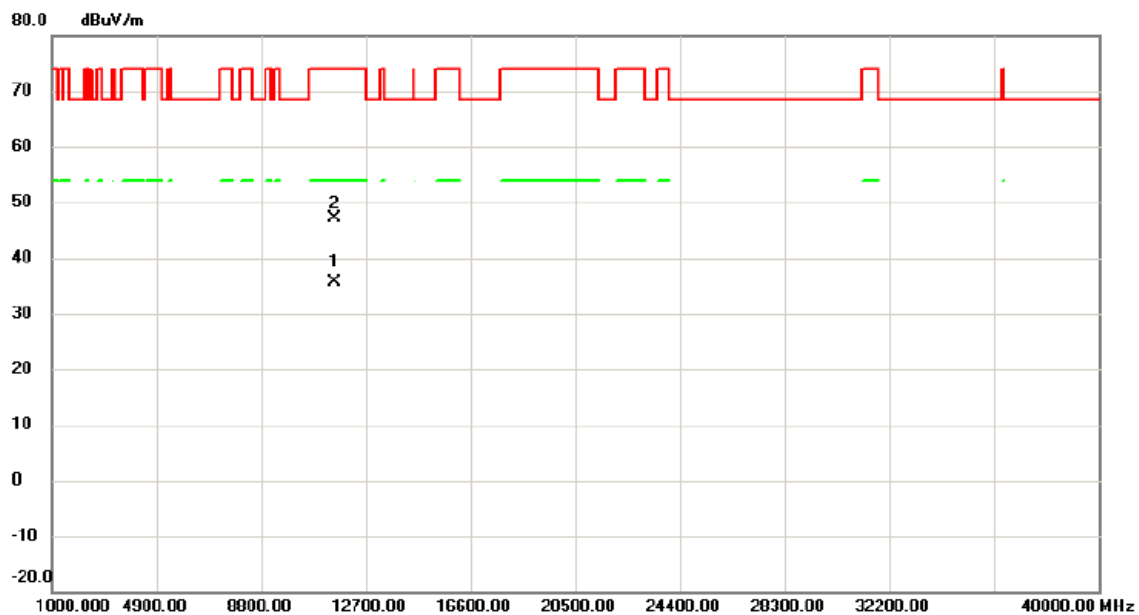

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11509.58	32.84	2.88	35.72	54.00	-18.28	AVG	
2		11510.04	44.26	2.88	47.14	74.00	-26.86	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

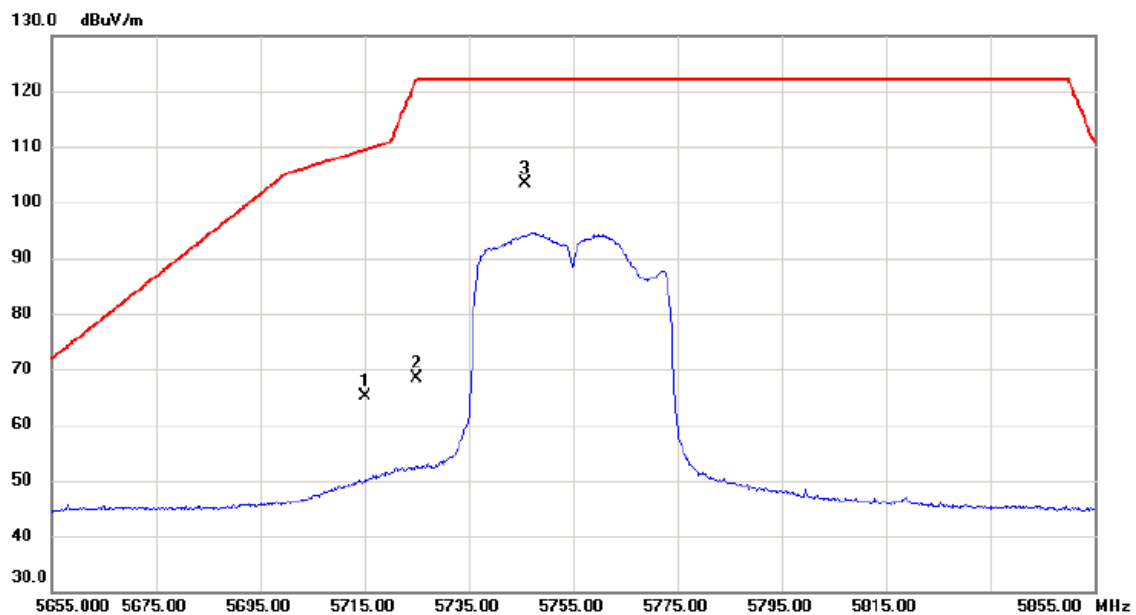

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	65.44	-0.35	65.09	109.40	-44.31	peak	
2		5725.000	68.77	-0.31	68.46	122.20	-53.74	peak	
3	*	5745.900	103.73	-0.26	103.47	122.20	-18.73	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

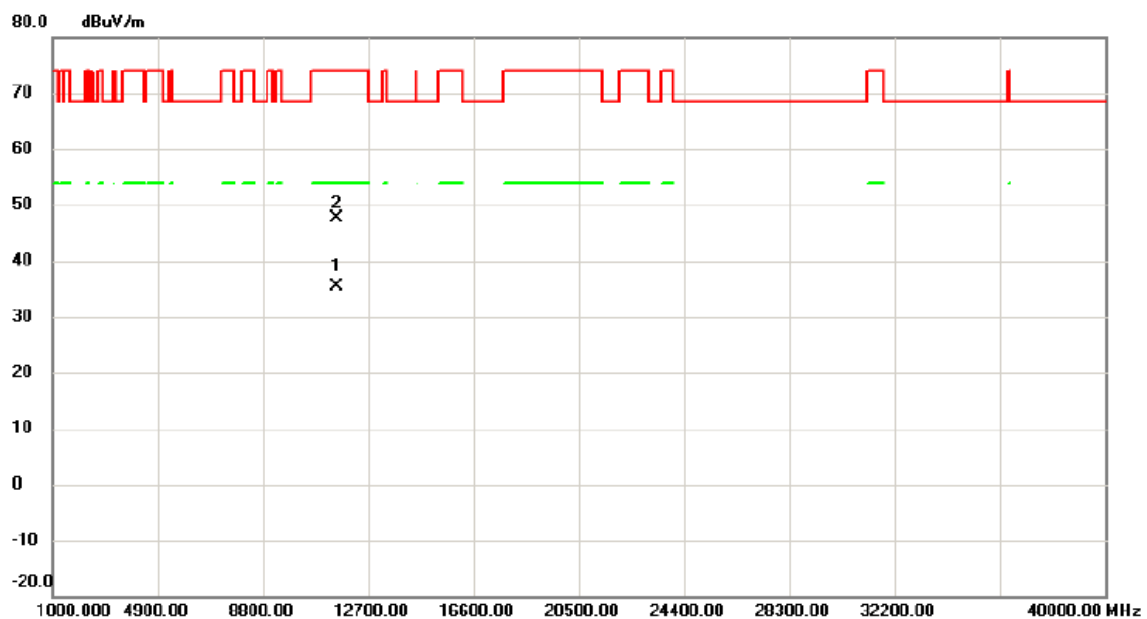


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11512.94	32.52	2.88	35.40	54.00	-18.60	AVG	
2		11513.45	44.83	2.88	47.71	74.00	-26.29	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

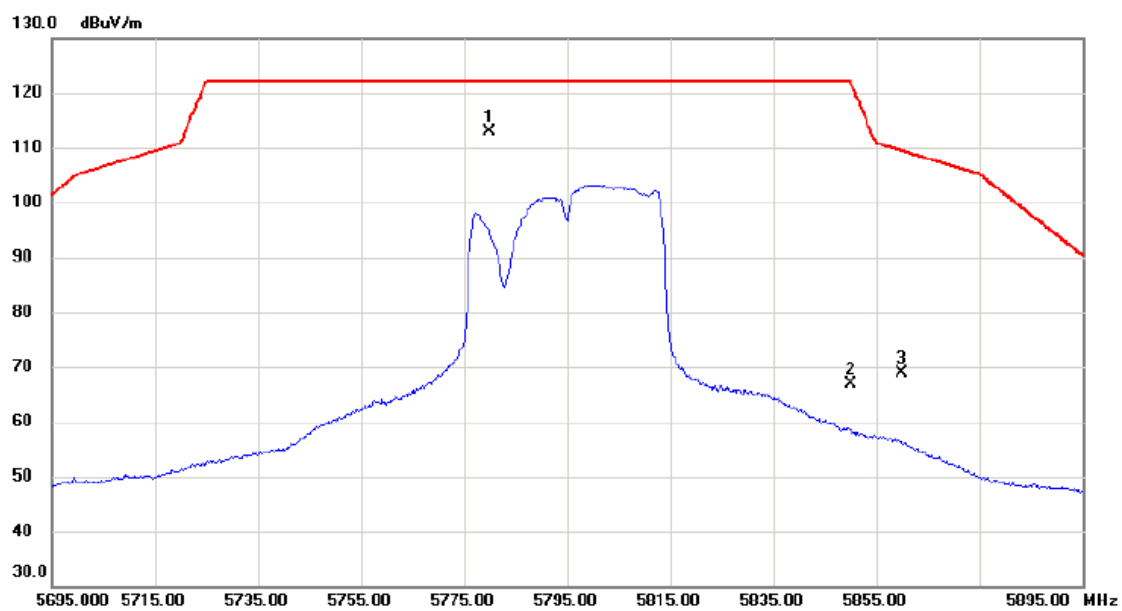


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5780.000	113.04	-0.18	112.86	122.20	-9.34	peak	主波訊號不予判定
2		5850.000	66.85	0.00	66.85	122.20	-55.35	peak	
3		5860.000	68.95	0.03	68.98	109.40	-40.42	peak	

測試頻道: IEEE 802.11ac (VHT40) /
 5795 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

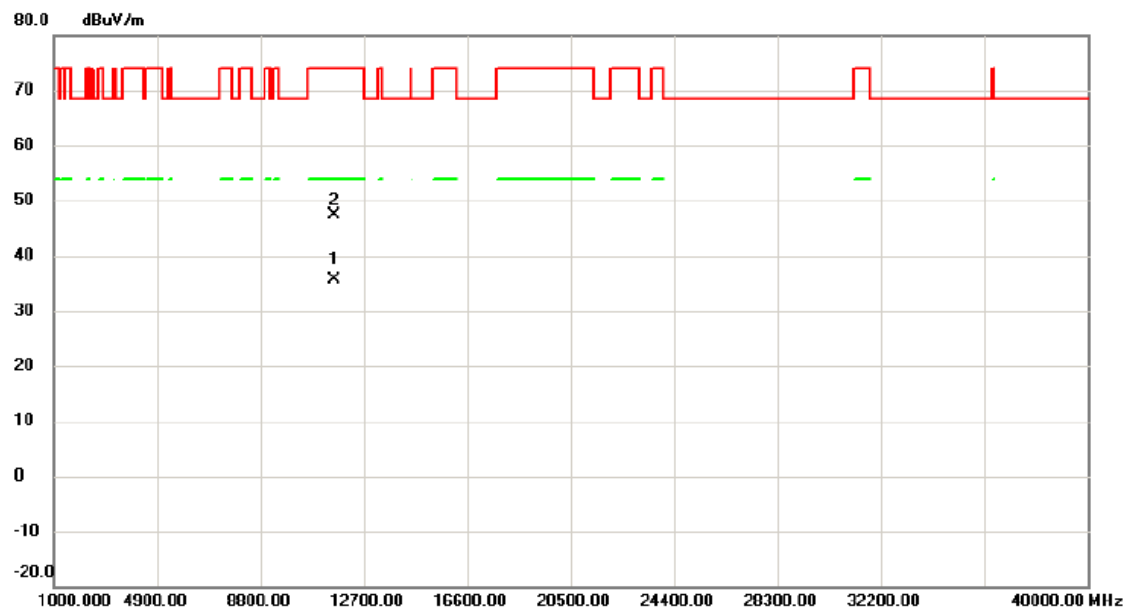


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11583.37	32.87	2.69	35.56	54.00	-18.44	AVG	
2		11590.48	44.64	2.66	47.30	74.00	-26.70	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

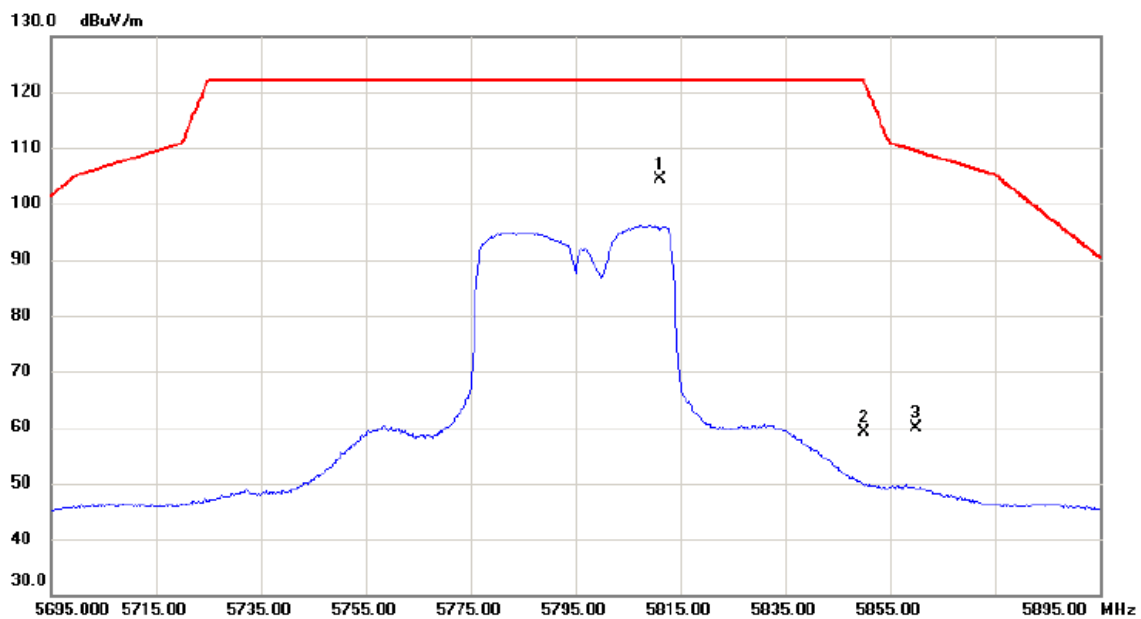


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5811.000	104.59	-0.09	104.50	122.20	-17.70	peak	主波訊號不予判定
2		5850.000	59.05	0.00	59.05	122.20	-63.15	peak	
3		5860.000	59.97	0.03	60.00	109.40	-49.40	peak	

測試頻道: IEEE 802.11ac (VHT40) /
 5795 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X Polarization: Horizontal

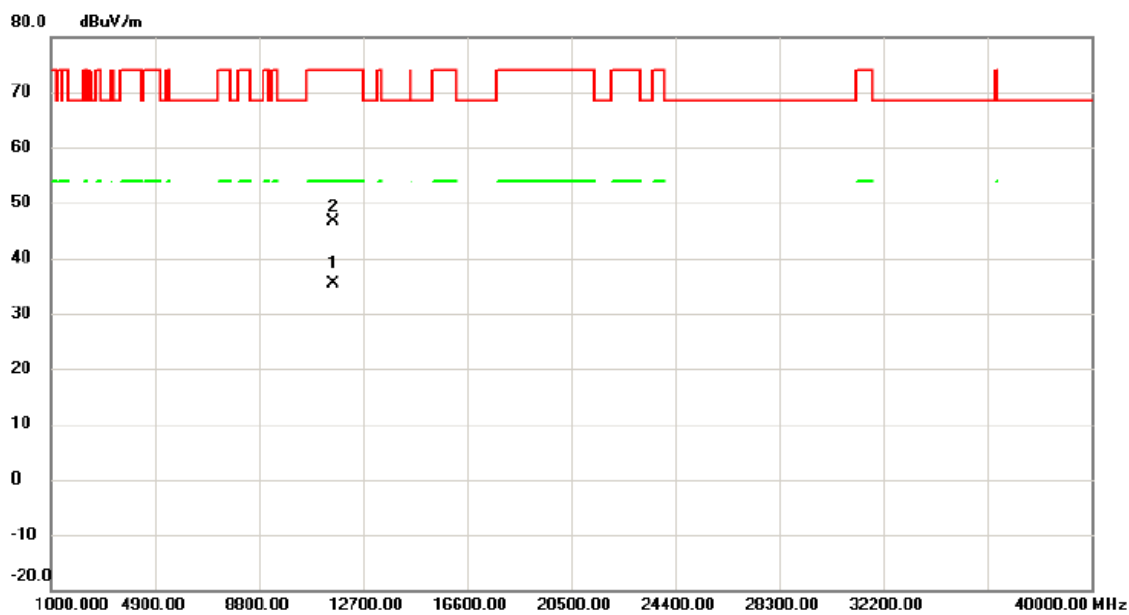


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11580.11	32.64	2.68	35.32	54.00	-18.68	AVG	
2		11591.59	43.86	2.66	46.52	74.00	-27.48	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

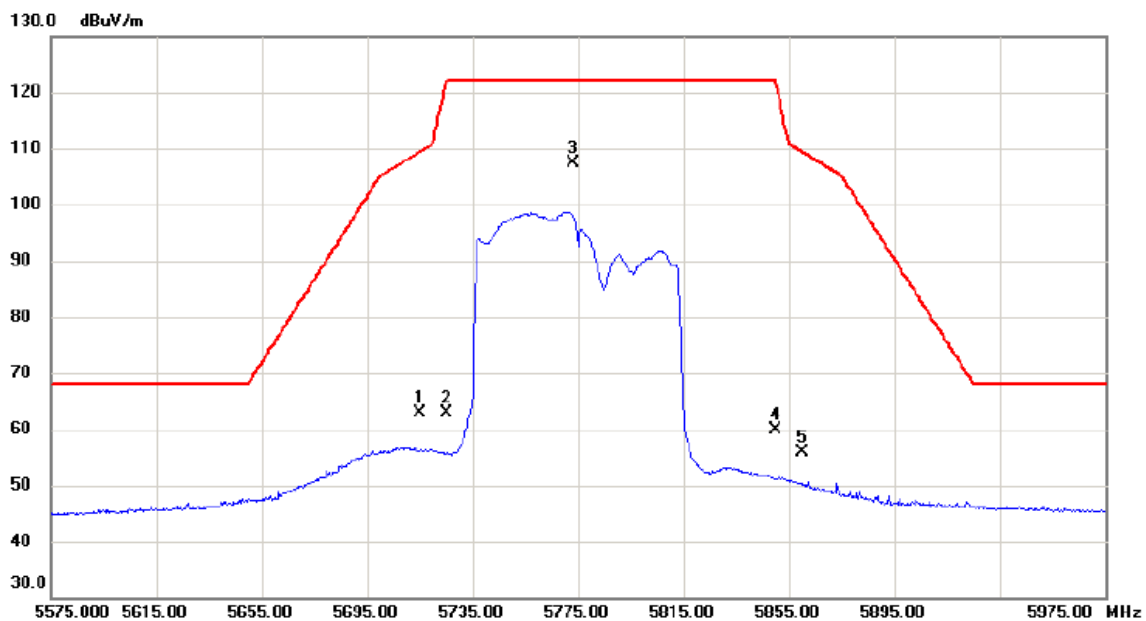


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	63.34	-0.35	62.99	109.40	-46.41	peak	
2		5725.000	63.19	-0.31	62.88	122.20	-59.32	peak	
3	*	5773.200	107.67	-0.19	107.48	122.20	-14.72	peak	主波訊號不予判定
4		5850.000	59.80	0.00	59.80	122.20	-62.40	peak	
5		5860.000	55.93	0.03	55.96	109.40	-53.44	peak	

測試頻道: IEEE 802.11ac (VHT80) /
 5775 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

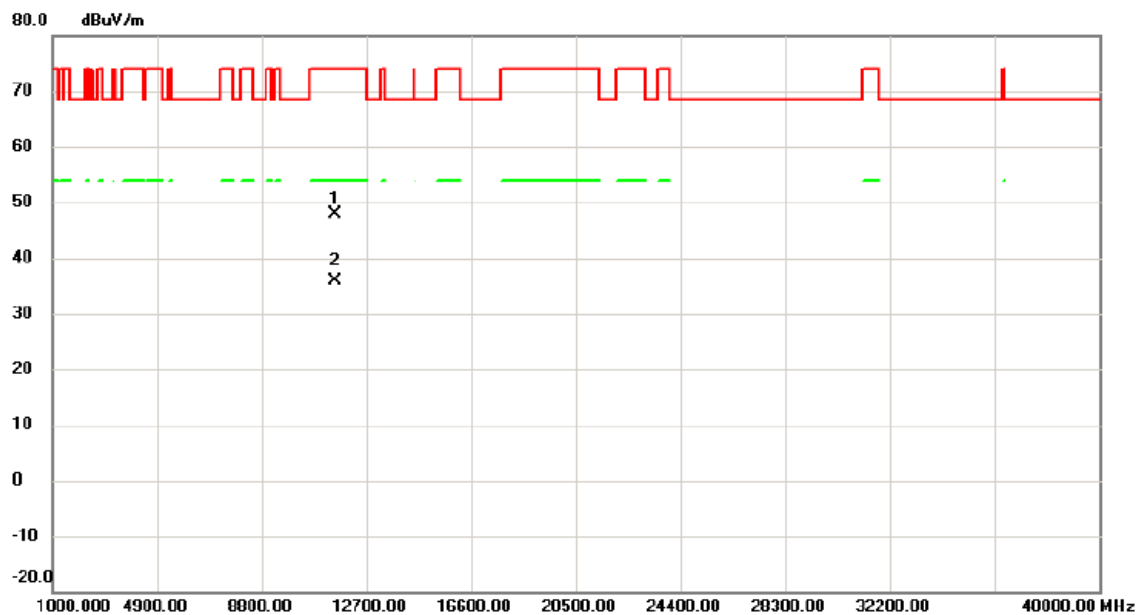


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11555.19	45.05	2.76	47.81	74.00	-26.19	peak	
2	*	11555.28	33.11	2.76	35.87	54.00	-18.13	AVG	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

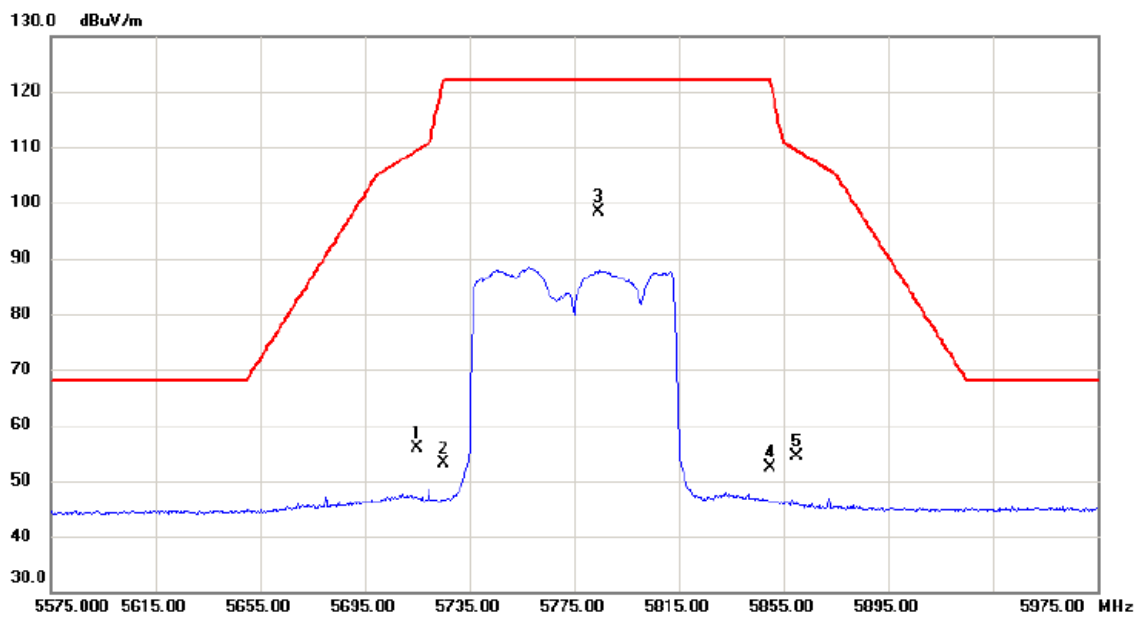


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	56.34	-0.35	55.99	109.40	-53.41	peak	
2		5725.000	53.51	-0.31	53.20	122.20	-69.00	peak	
3	*	5784.400	98.46	-0.15	98.31	122.20	-23.89	peak	主波訊號不予判定
4		5850.000	52.33	0.00	52.33	122.20	-69.87	peak	
5		5860.000	54.23	0.03	54.26	109.40	-55.14	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

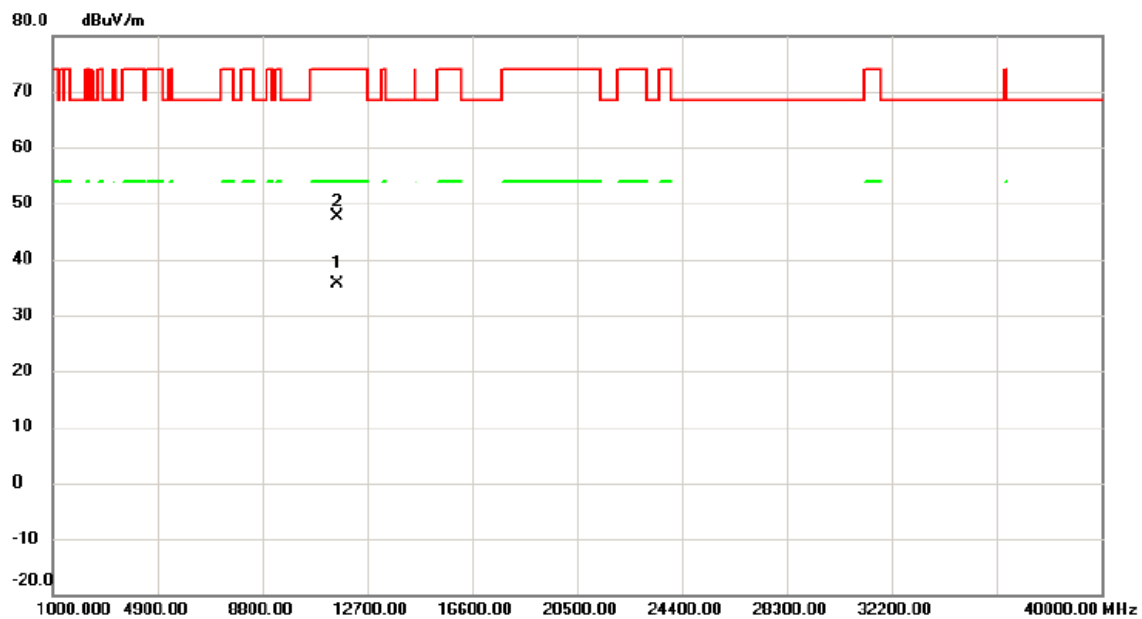

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11557.46	32.90	2.75	35.65	54.00	-18.35	AVG	
2		11559.30	44.83	2.74	47.57	74.00	-26.43	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 接收

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

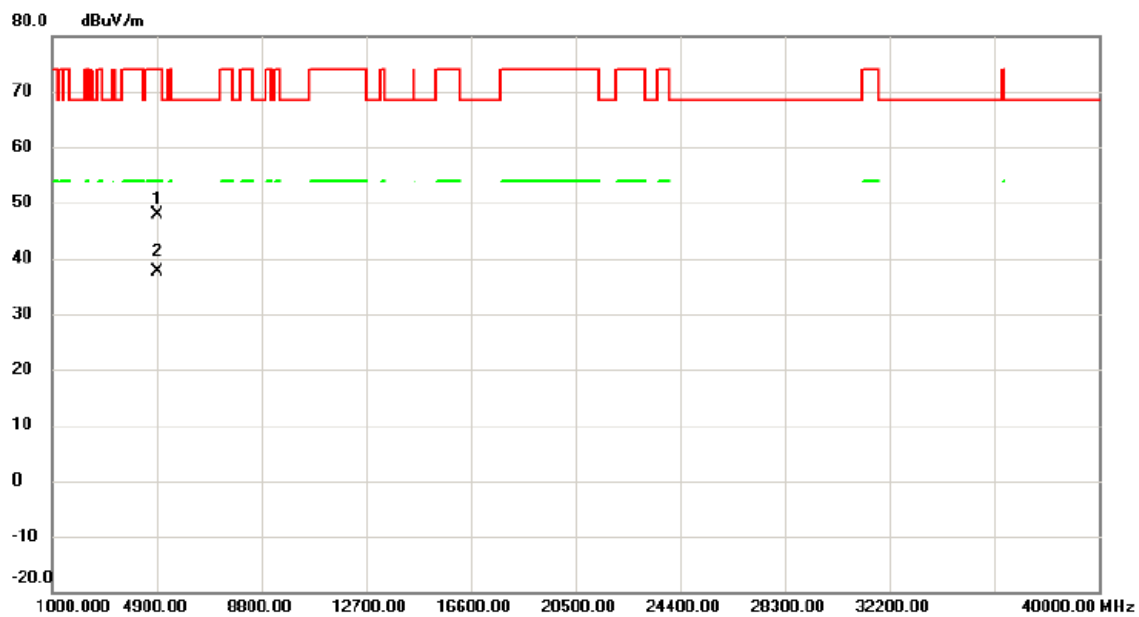

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4902.271	59.26	-11.40	47.86	74.00	-26.14	peak	
2	*	4902.271	49.08	-11.40	37.68	54.00	-16.32	AVG	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 接收

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

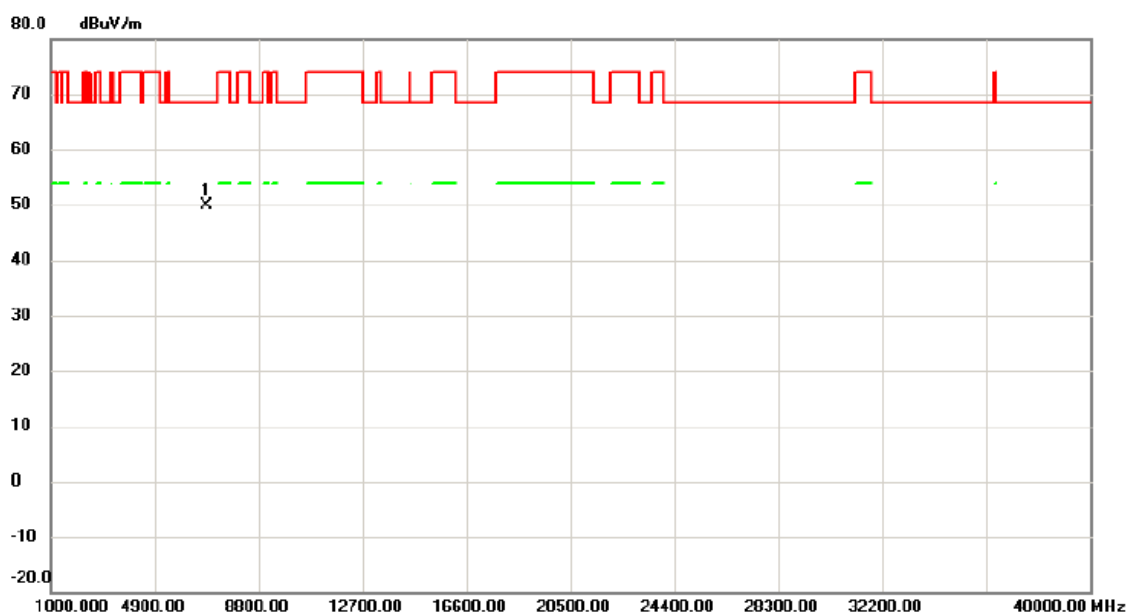

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	6854.650	56.44	-6.67	49.77	68.30	-18.53	peak	