

Test Report No.50167500 001

Appendix D: Radiated and Mains Spurious Emission Data



(File: 50167500AppendixD)

Contents



Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G.....	6
Spurious Emissions, TX Mode, 18-26G.....	12
Spurious Emissions, TX Mode, 30M-1G	18
Spurious Emissions, TX Mode, 9k-30M	20
Spurious Emissions, RX Mode, 1-18G	22
Spurious Emissions, RX Mode, 18-26G	24
Spurious Emissions, RX Mode, 30M-1G.....	26
Spurious Emissions, RX Mode, 9K-30M.....	28

Radiated Bandedge

Low Channel (Hor)

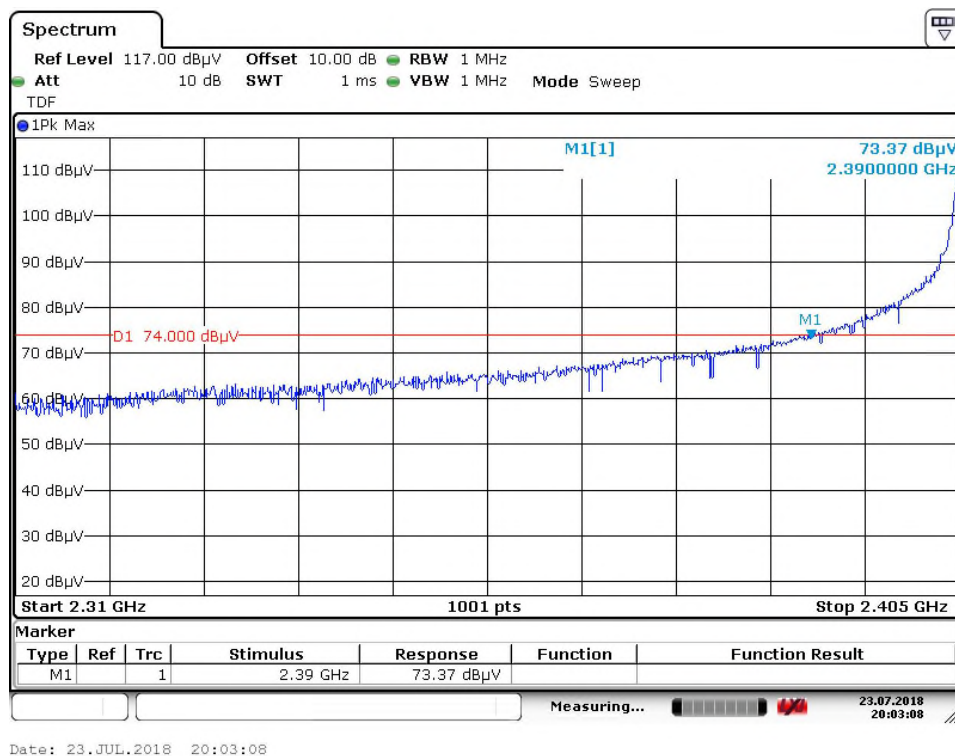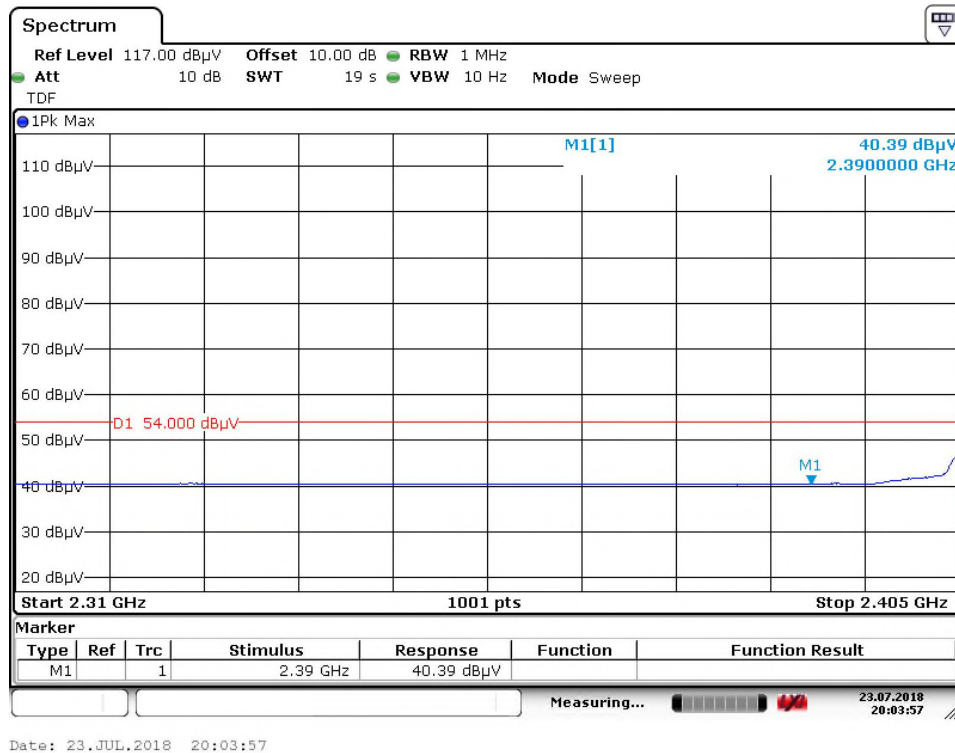



Low Channel (Ver)

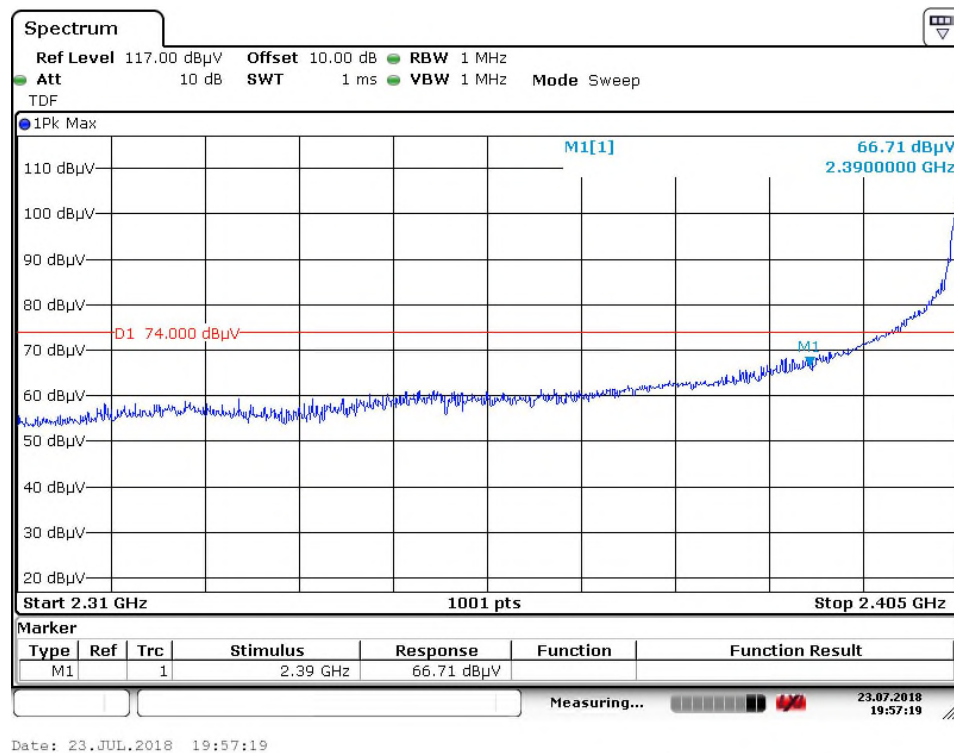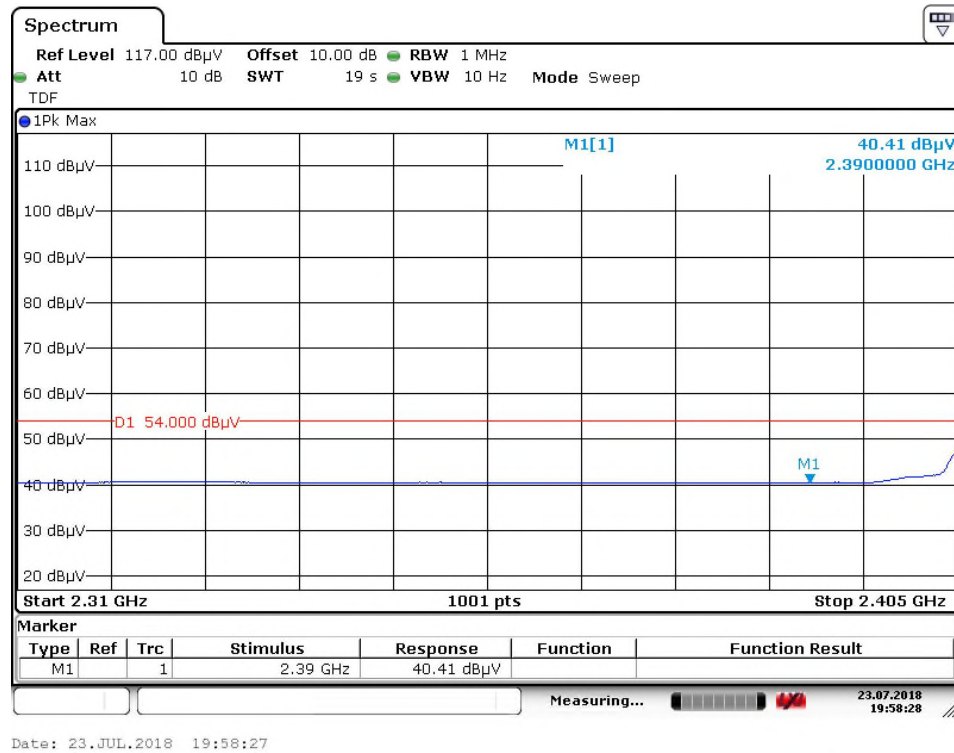

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge

High Channel (Hor)

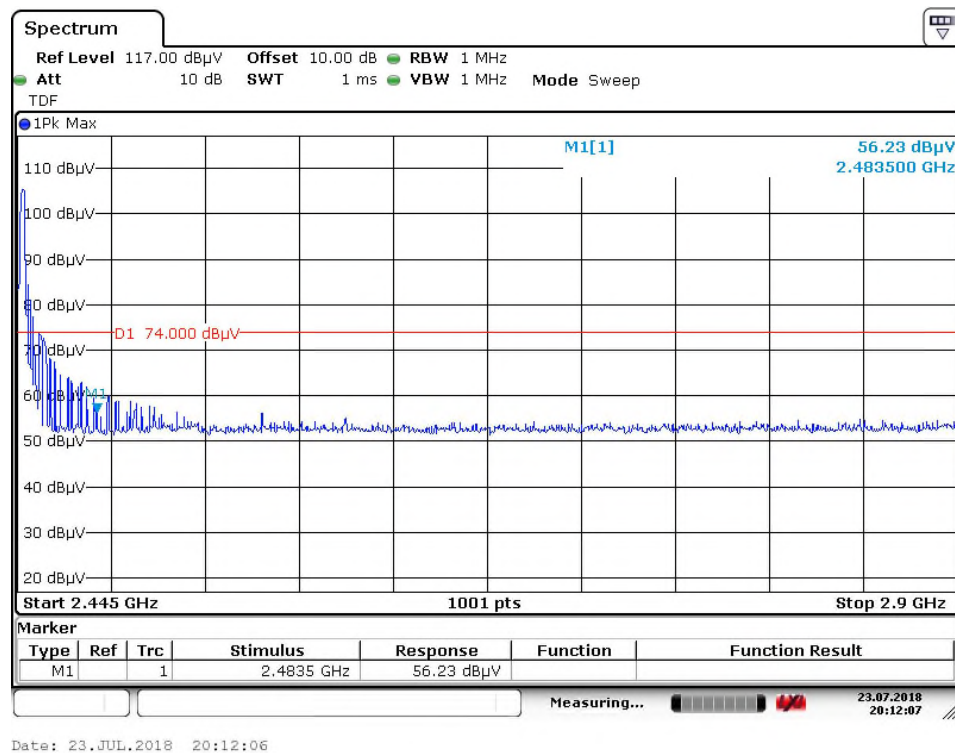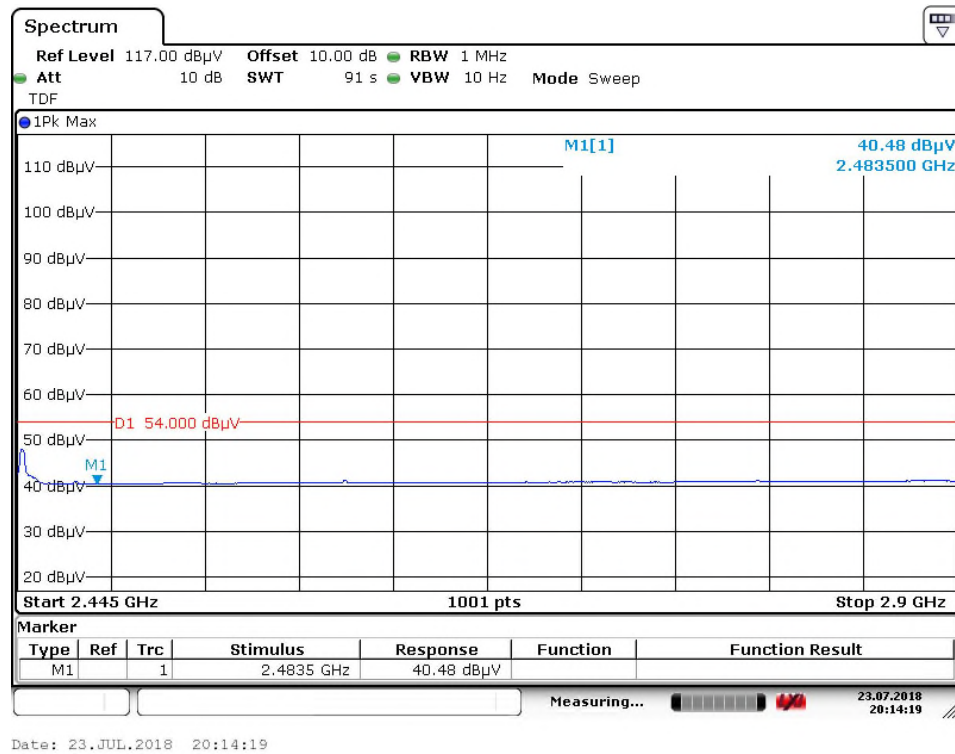

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver)

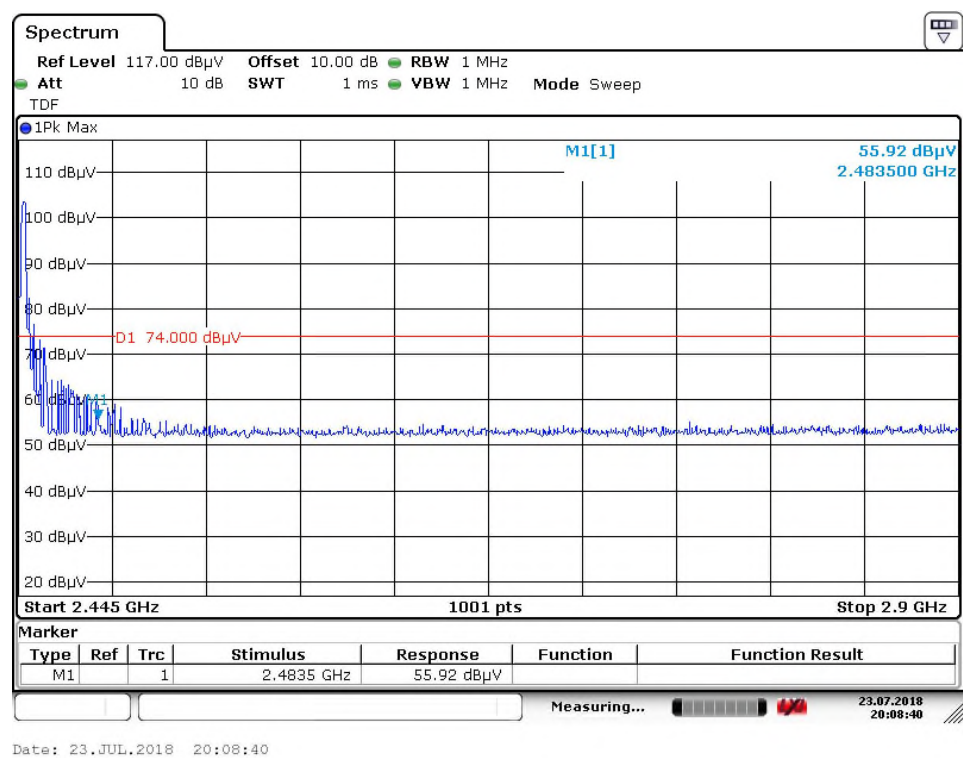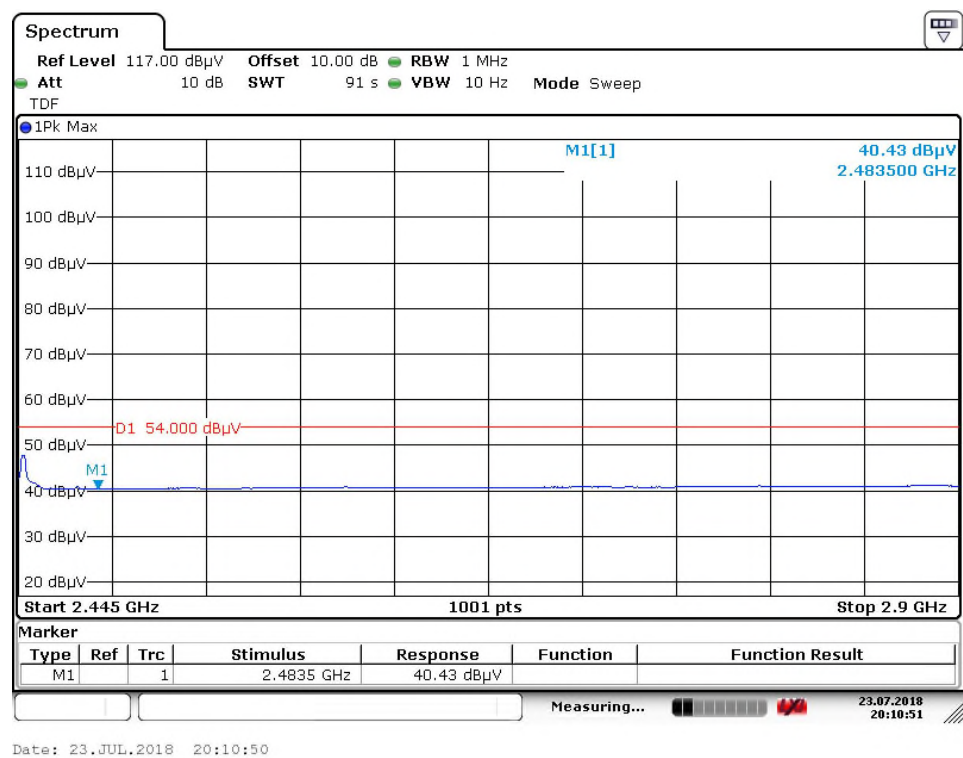

Spurious Emissions, Band Edge, 2.35-2.5G


Spurious Emissions, TX Mode, 1-18G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

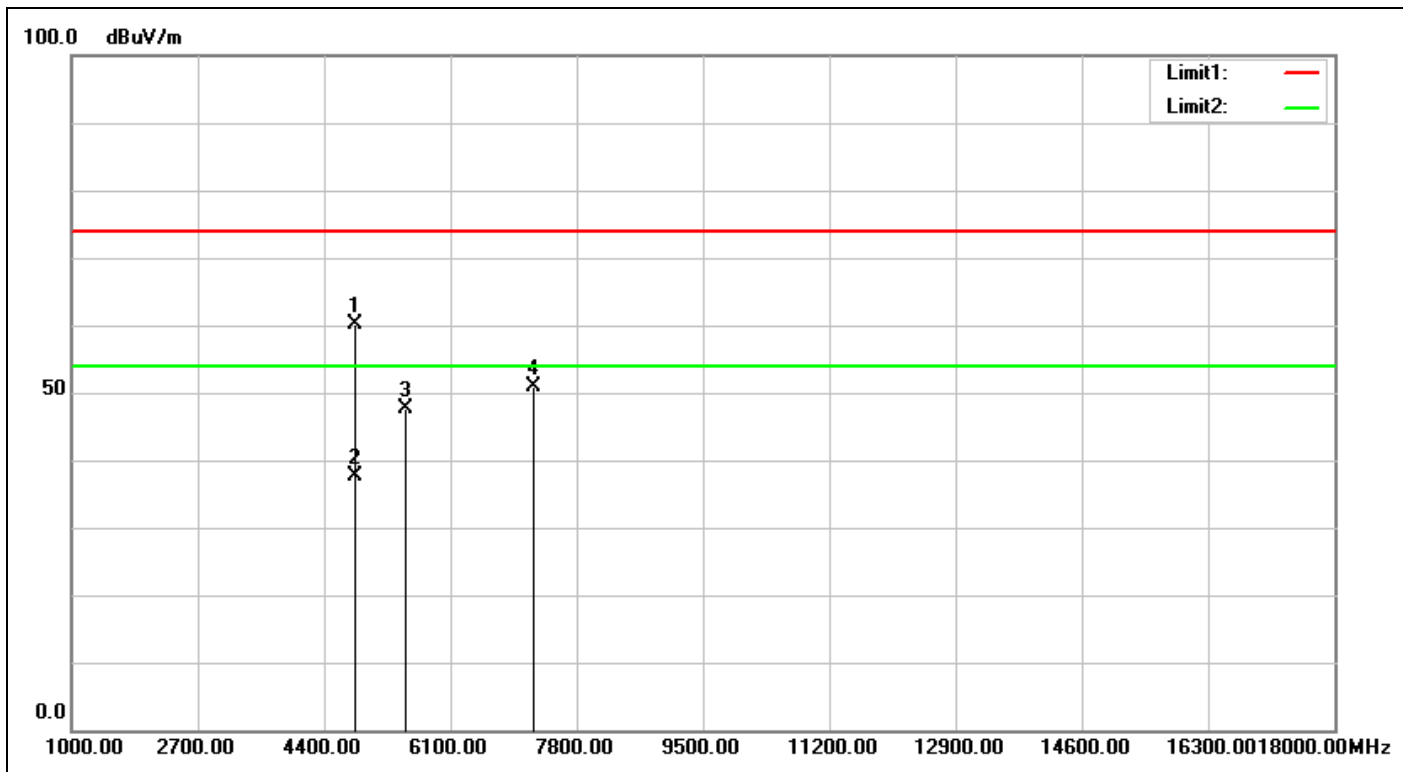

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 20:11:47
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2405.5		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4811.000	-2.47	62.48	60.01	74.00	-13.99	peak	100	191	
2	4811.000	-2.47	40.07	37.60	54.00	-16.40	AVG	100	191	
3	5488.000	0.26	47.26	47.52	74.00	-26.48	peak	100	185	
4	7211.000	5.40	45.47	50.87	74.00	-23.13	peak	100	173	

Spurious Emissions, TX Mode, 1-18G

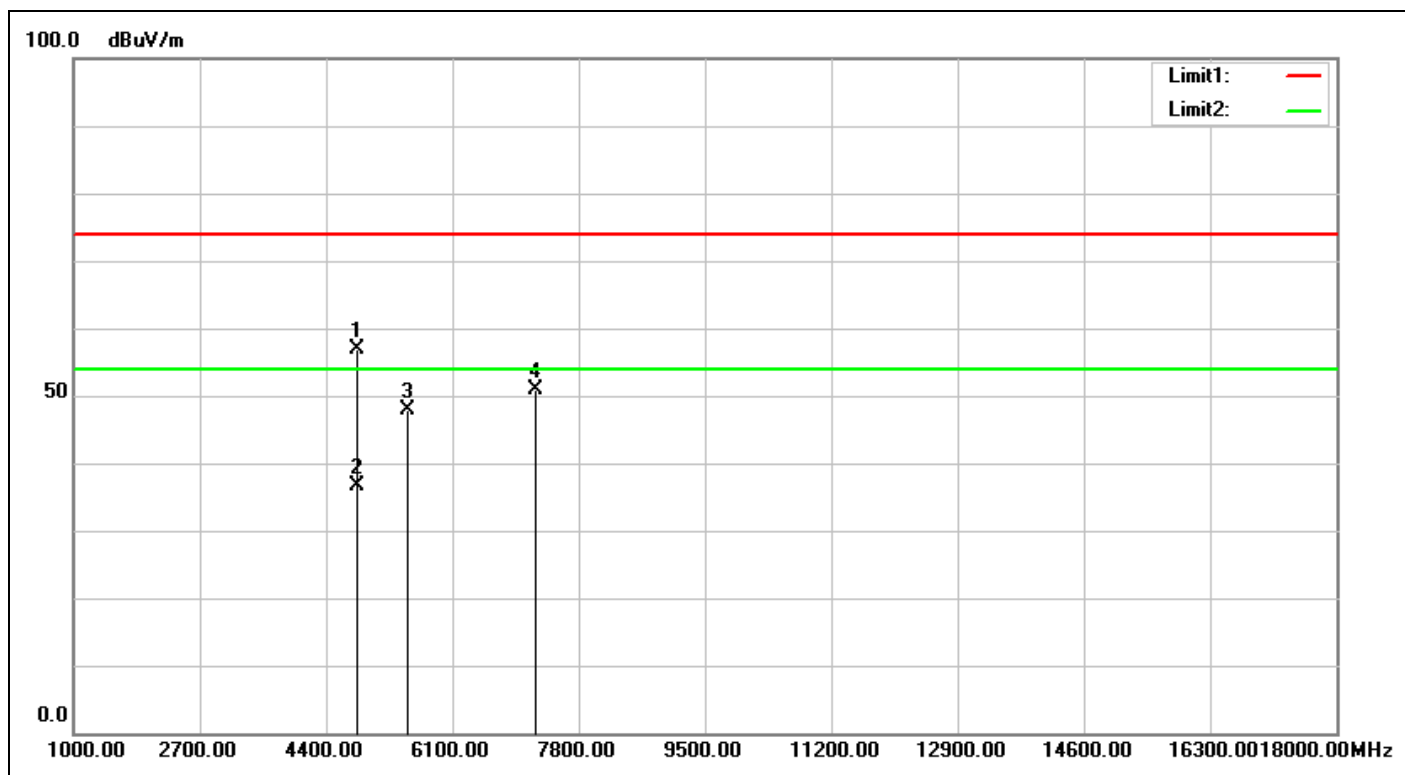


Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 20:12:50
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2405.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4811.000	-2.47	59.36	56.89	74.00	-17.11	peak	100	153	
2	4811.000	-2.47	39.21	36.74	54.00	-17.26	AVG	100	153	
3	5488.000	0.26	47.64	47.90	74.00	-26.10	peak	100	114	
4	7211.000	5.40	45.38	50.78	74.00	-23.22	peak	100	201	

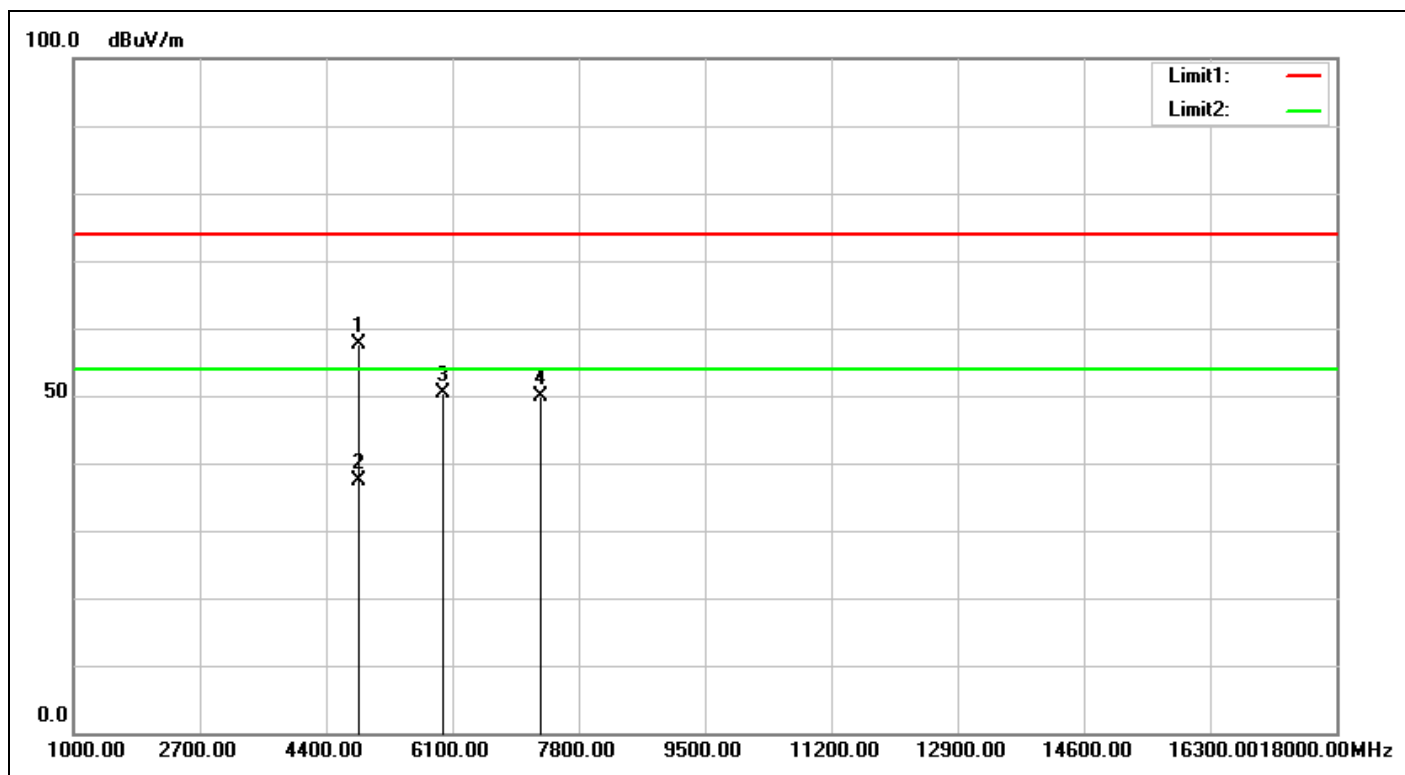


Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 20:17:57
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4853.000	-2.35	59.89	57.54	74.00	-16.46	peak	100	0	
2	4853.000	-2.35	39.61	37.26	54.00	-16.74	AVG	100	0	
3	5964.000	3.24	47.11	50.35	74.00	-23.65	peak	100	352	
4	7279.000	5.56	44.34	49.90	74.00	-24.10	peak	100	115	

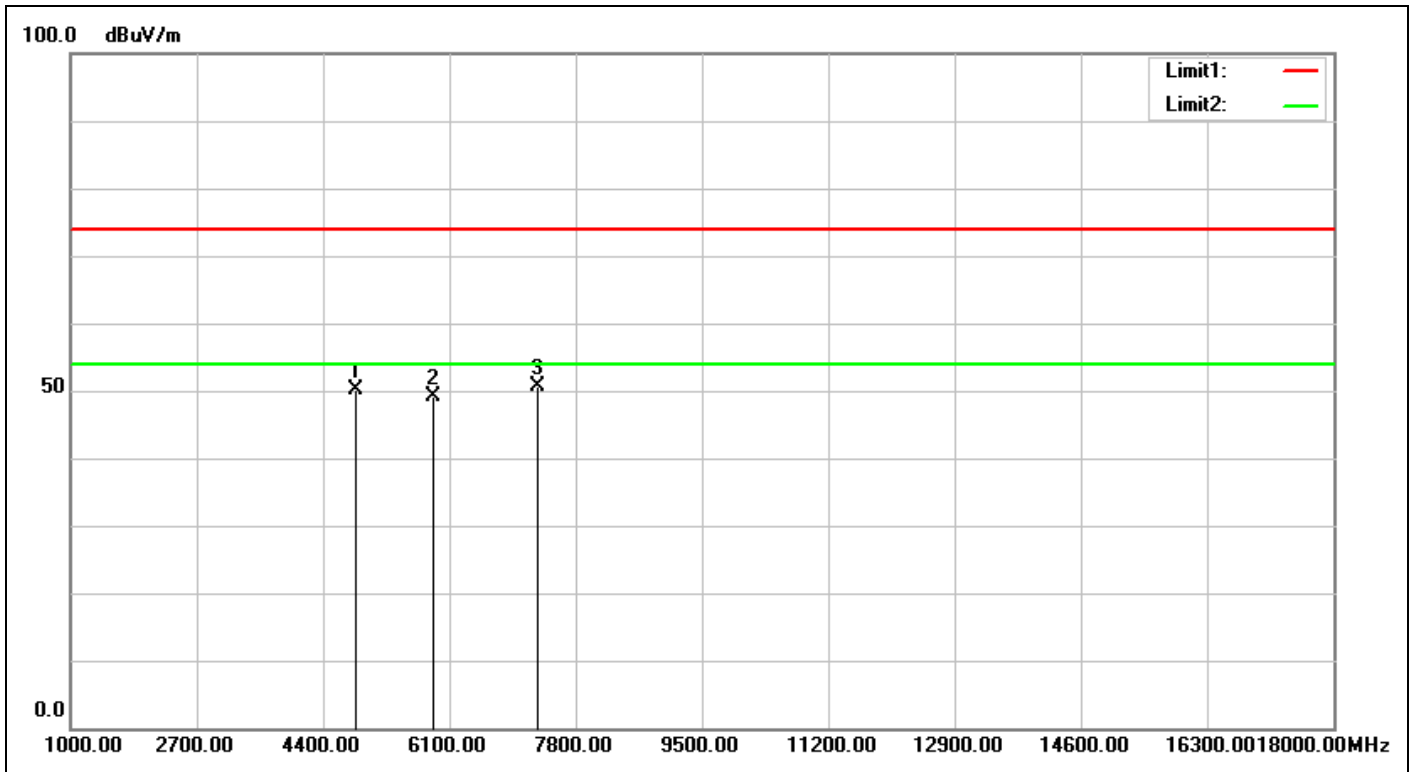


Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 20:19:00
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4853.000	-2.35	52.46	50.11	74.00	-23.89	peak	100	94	
2	5879.000	2.71	46.45	49.16	74.00	-24.84	peak	100	321	
3	7279.000	5.56	45.09	50.65	74.00	-23.35	peak	100	36	

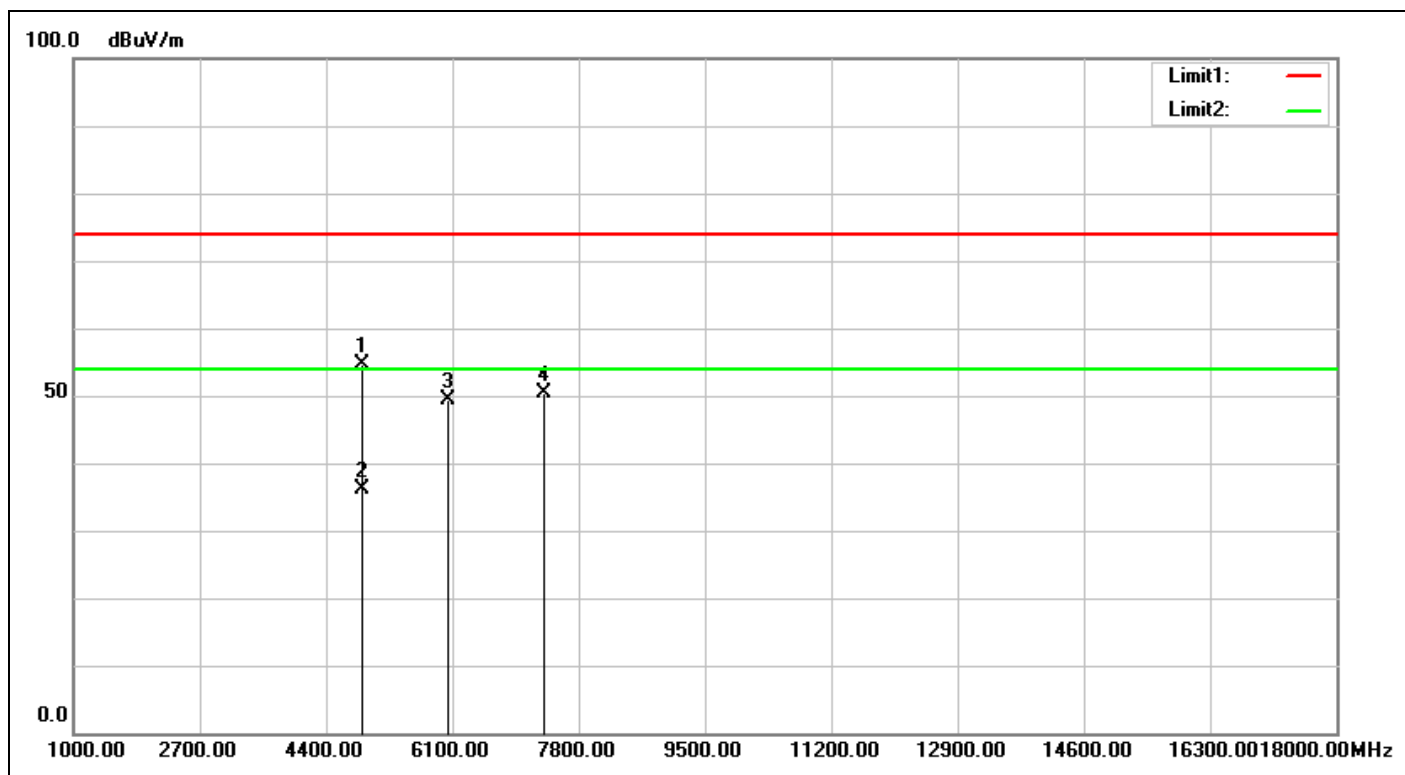

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 20:07:36
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2447.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4895.000	-2.23	56.82	54.59	74.00	-19.41	peak	100	360	
2	4895.000	-2.23	38.27	36.04	54.00	-17.96	AVG	100	360	
3	6032.000	3.60	45.84	49.44	74.00	-24.56	peak	100	249	
4	7342.000	5.70	44.73	50.43	74.00	-23.57	peak	100	201	

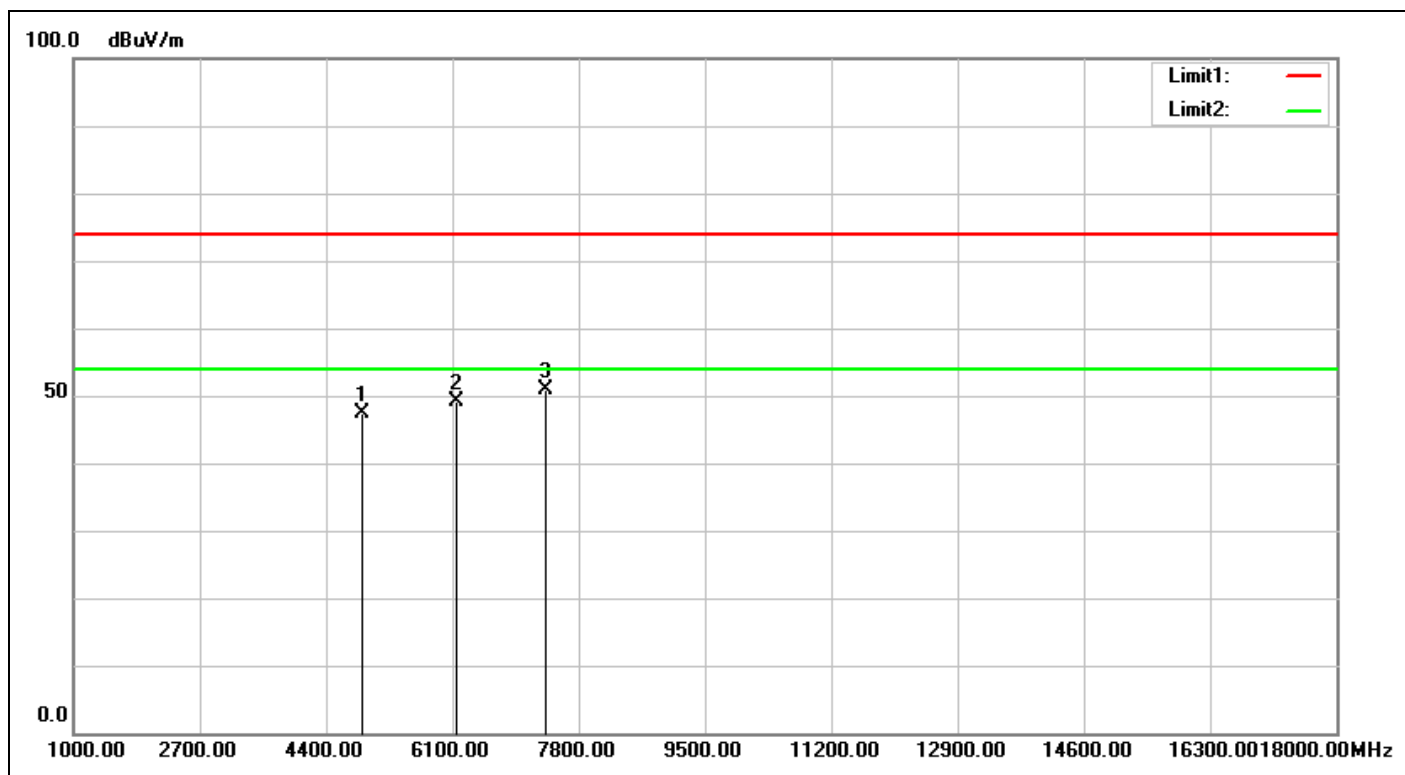

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 20:08:39
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2447.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4895.000	-2.23	49.67	47.44	74.00	-26.56	peak	100	235	
2	6151.000	4.10	45.13	49.23	74.00	-24.77	peak	100	225	
3	7342.000	5.70	45.25	50.95	74.00	-23.05	peak	100	16	


Spurious Emissions, TX Mode, 18-26G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

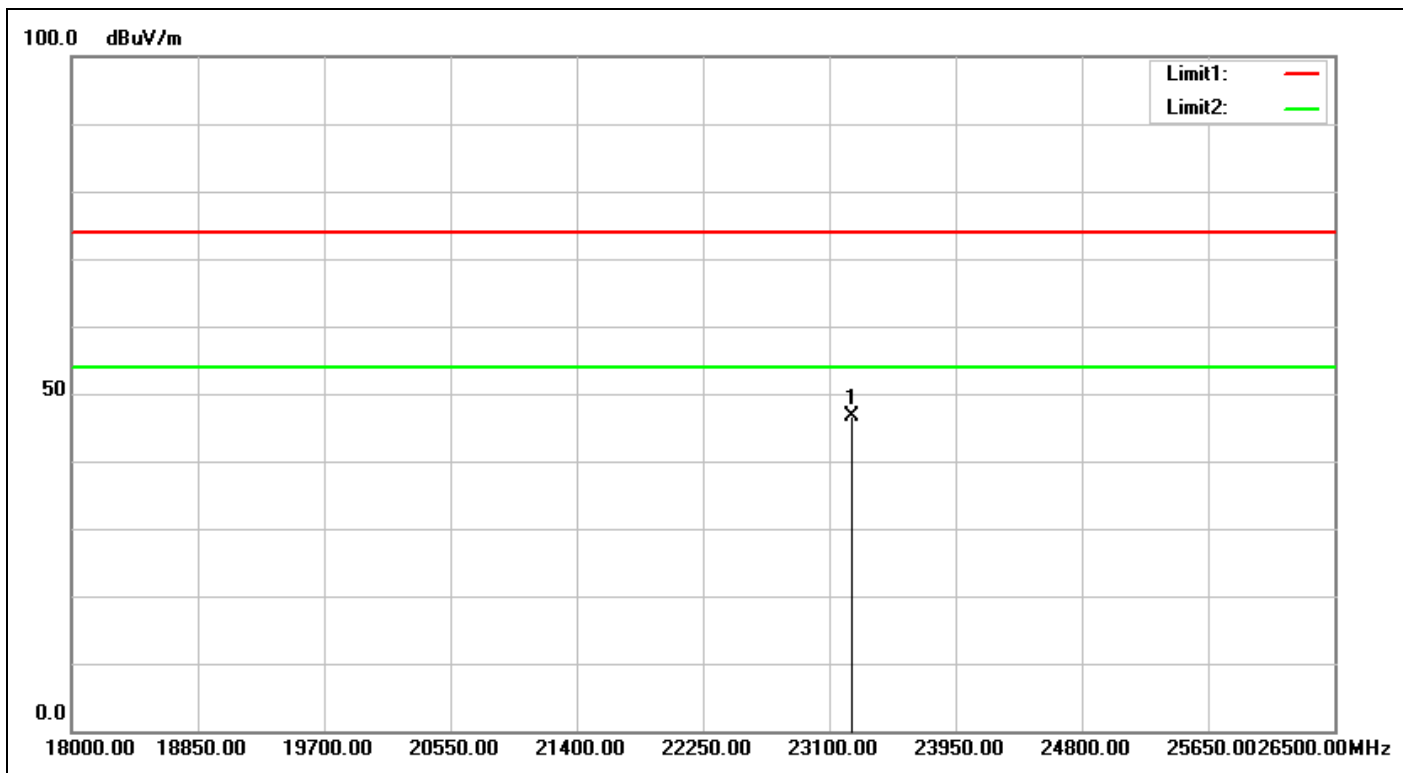


Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 20:42:08
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2405.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23253.000	5.59	40.99	46.58	74.00	-27.42	peak	100	95	

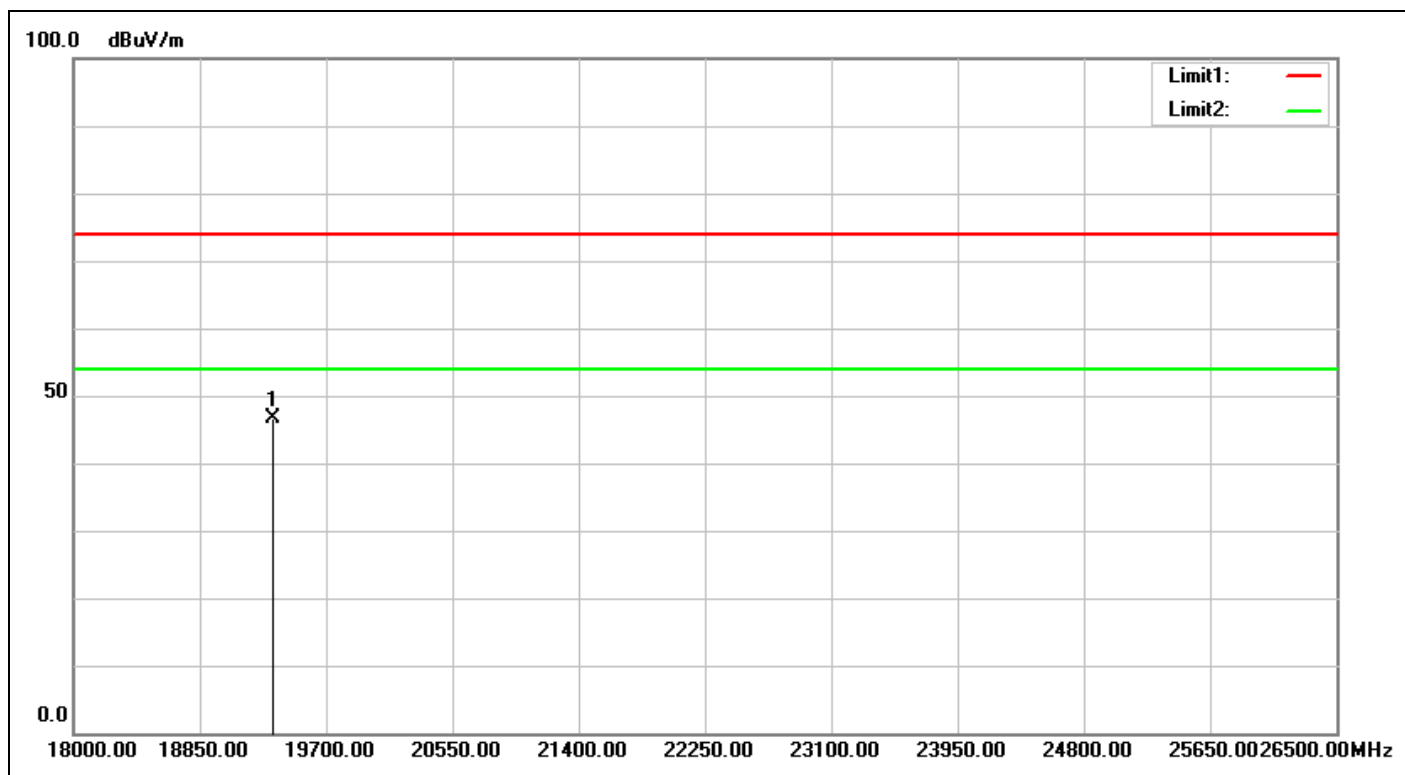


Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 20:43:11
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2405.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19343.000	4.00	42.53	46.53	74.00	-27.47	peak	100	149	

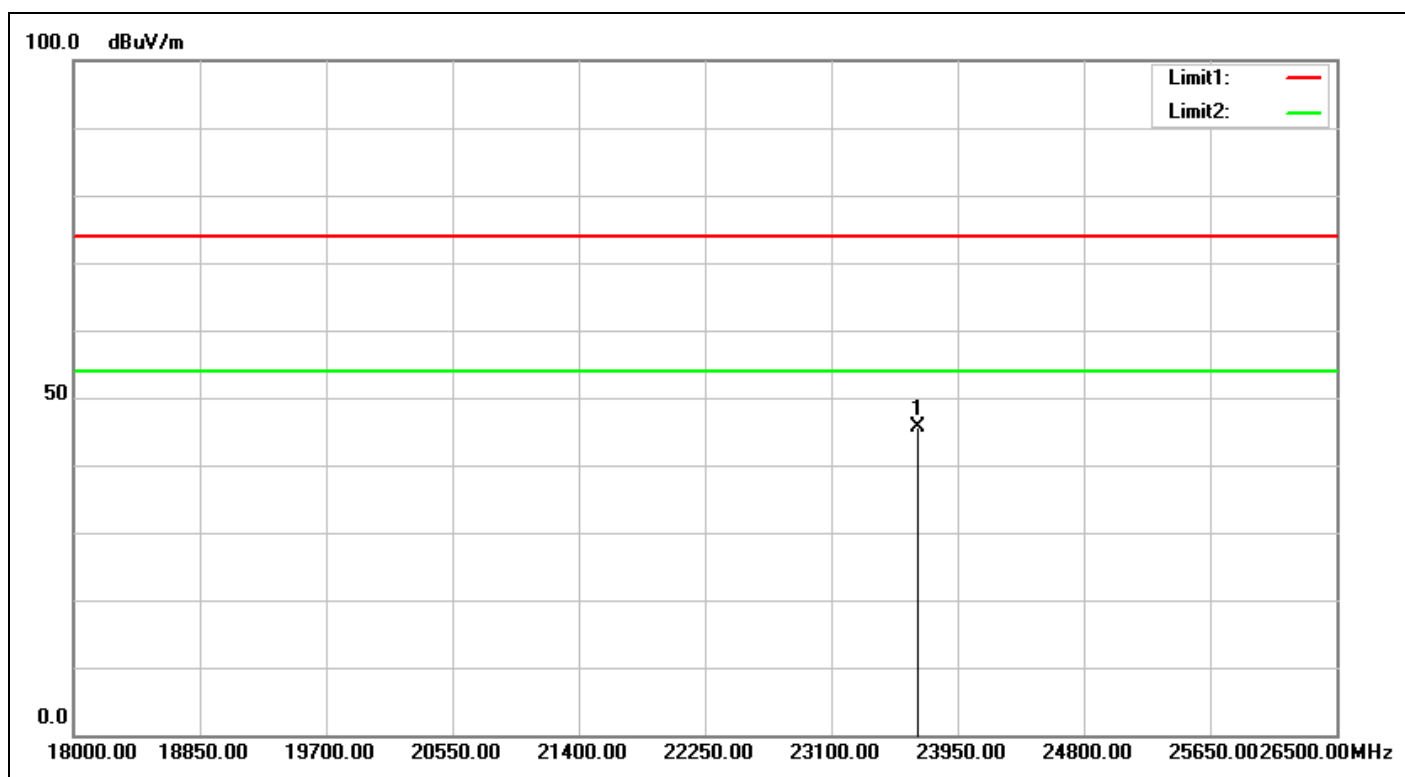


Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 20:45:15
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23686.500	5.71	39.89	45.60	74.00	-28.40	peak	100	1	

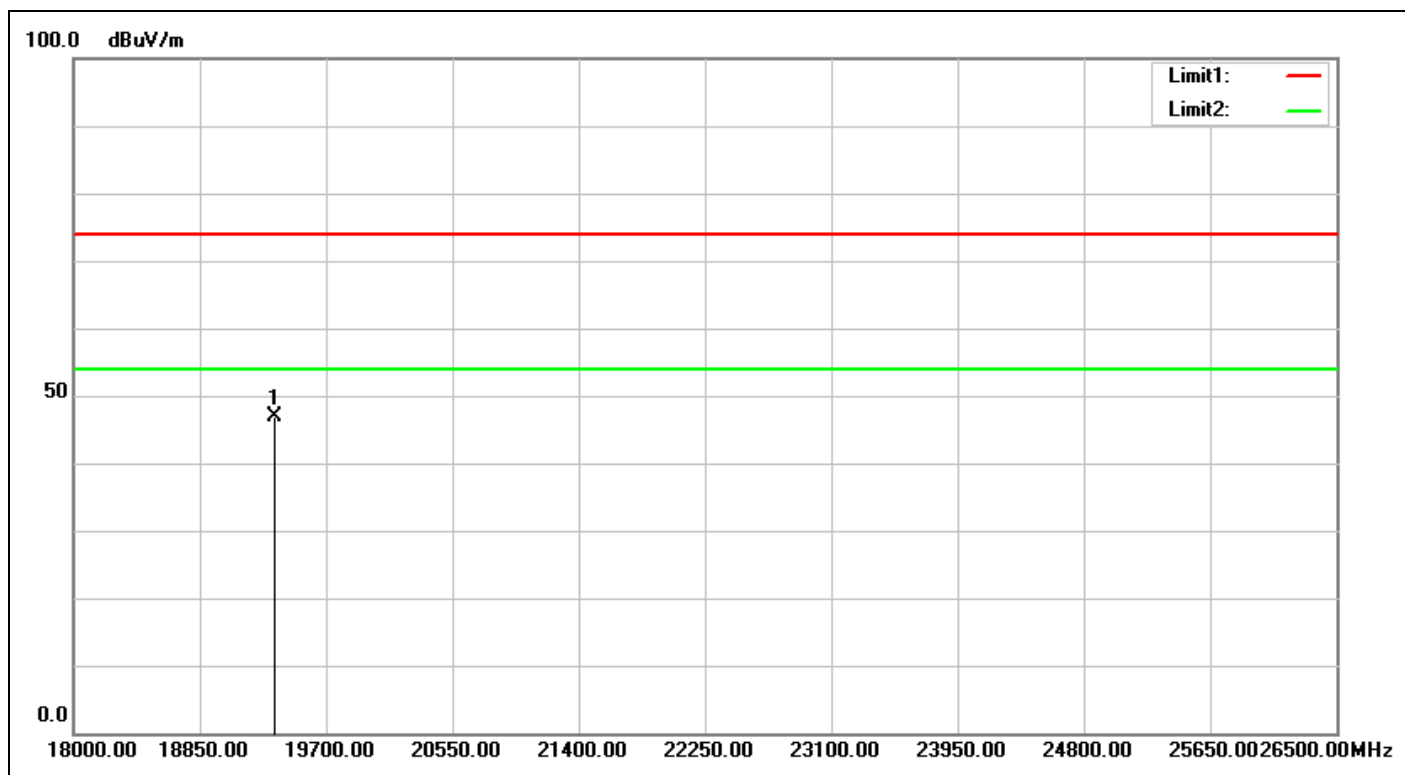


Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 20:46:18
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19351.500	3.99	42.84	46.83	74.00	-27.17	peak	100	163	

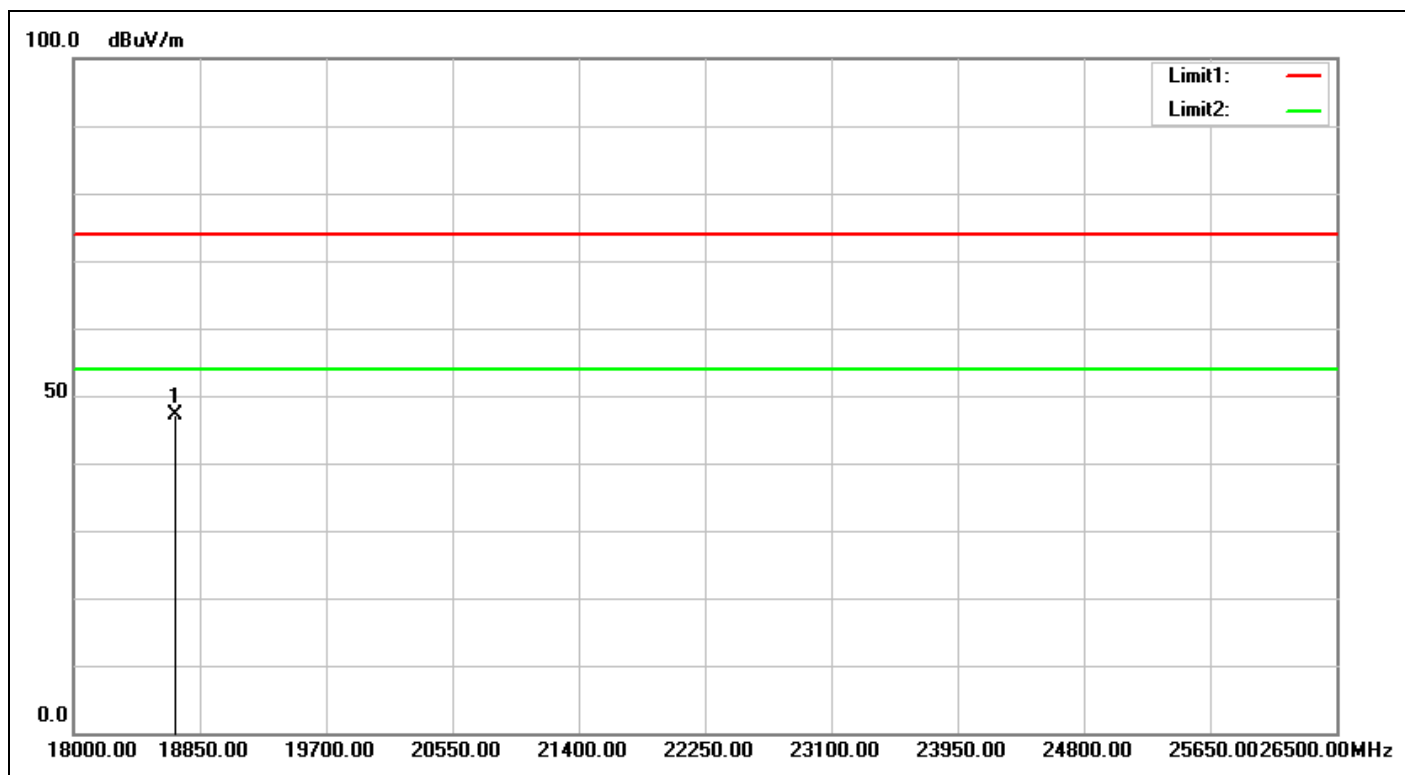

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 20:48:10
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2447.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18688.500	4.26	42.85	47.11	74.00	-26.89	peak	100	241	

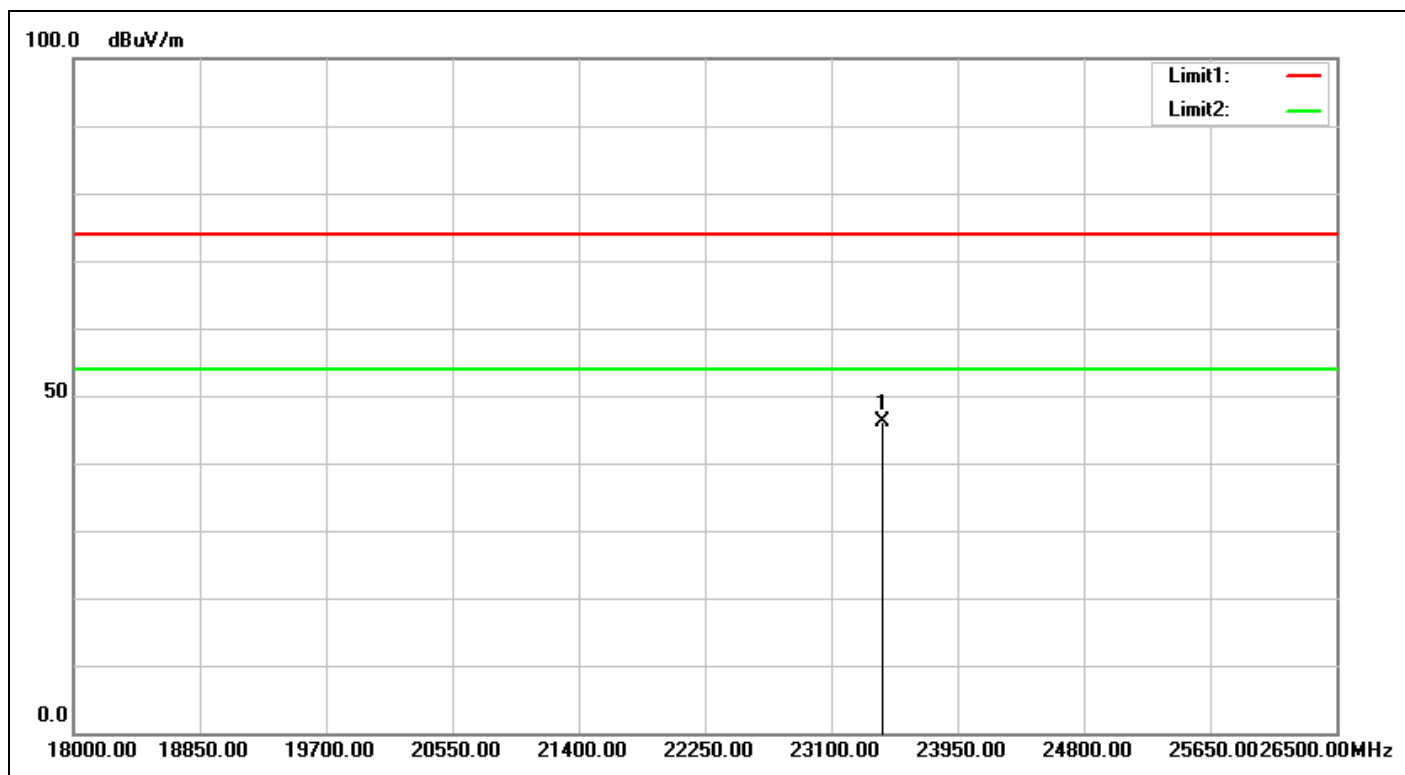

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 20:49:14
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2447.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23440.000	5.80	40.32	46.12	74.00	-27.88	peak	100	324	


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

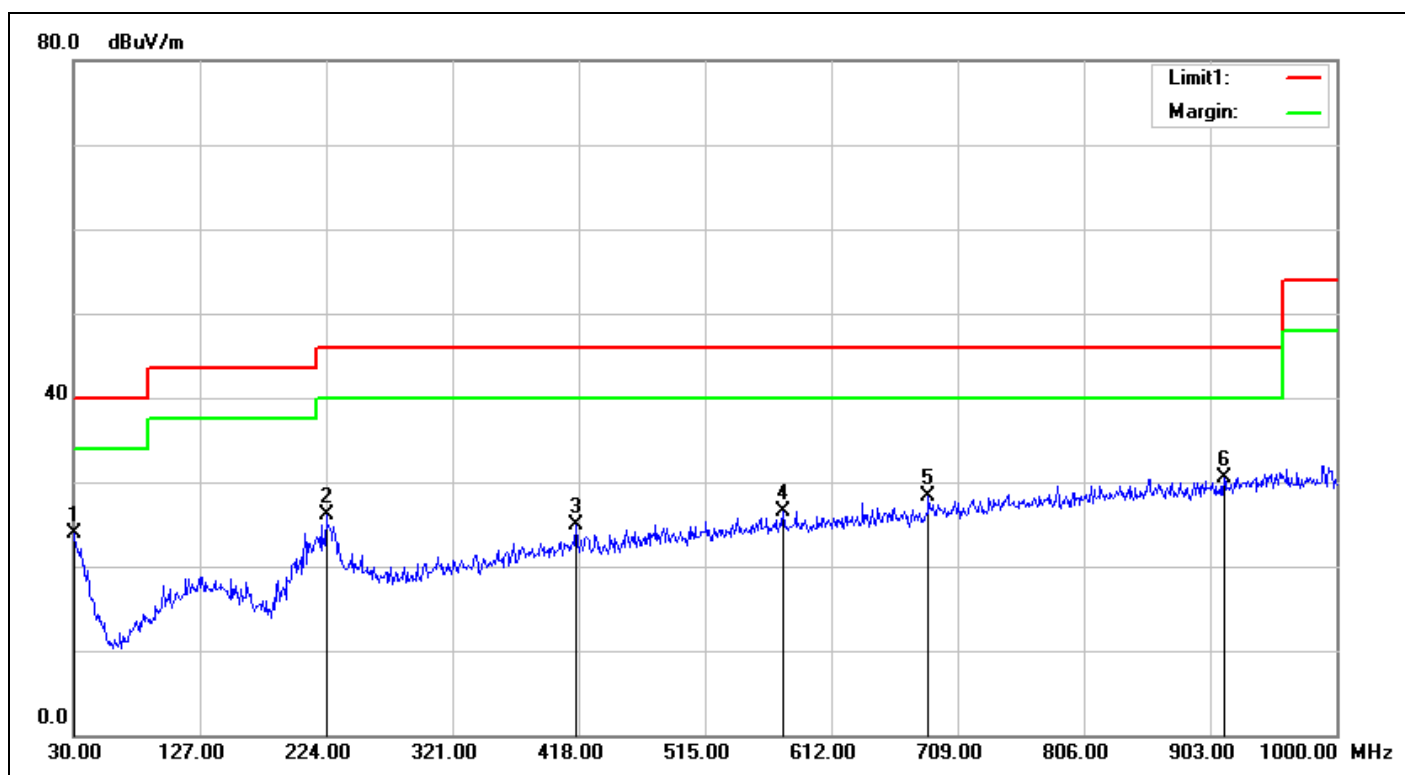

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 19:11:29
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.47	24.39	23.92	40.00	-16.08	QP	100	4	
2	224.0000	-8.63	34.79	26.16	46.00	-19.84	QP	100	107	
3	416.0600	-3.11	28.04	24.93	46.00	-21.07	QP	100	304	
4	575.1399	-1.19	27.73	26.54	46.00	-19.46	QP	100	219	
5	686.6900	-0.01	28.34	28.33	46.00	-17.67	QP	100	251	
6	913.6699	3.27	27.29	30.56	46.00	-15.44	QP	100	0	

Spurious Emissions, TX Mode, 30M-1G

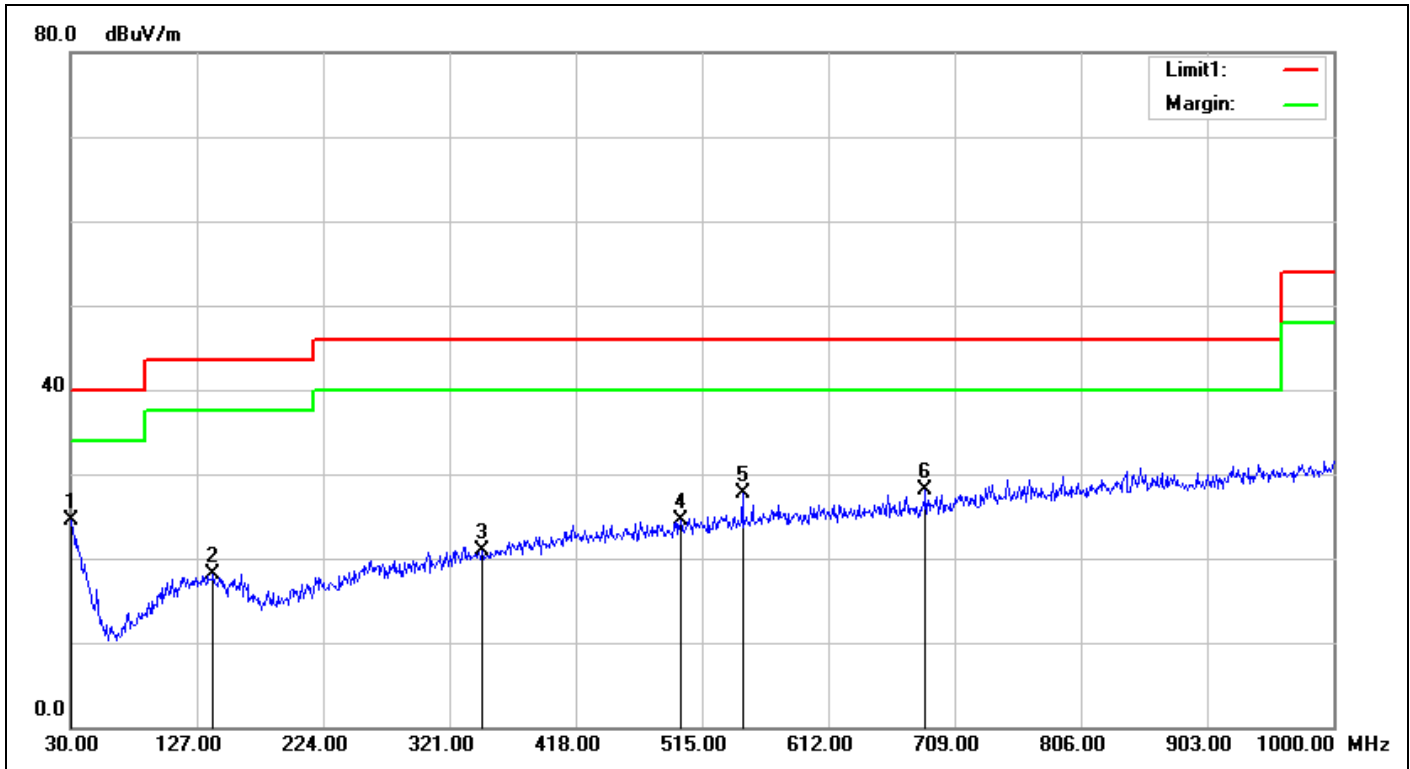

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 19:12:32
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.47	24.95	24.48	40.00	-15.52	QP	100	19	
2	139.6100	-7.50	25.53	18.03	43.50	-25.47	QP	100	112	
3	346.2200	-4.21	25.18	20.97	46.00	-25.03	QP	100	30	
4	498.5100	-2.14	26.55	24.41	46.00	-21.59	QP	100	240	
5	546.0400	-1.48	29.19	27.71	46.00	-18.29	QP	100	133	
6	686.6900	-0.01	28.12	28.11	46.00	-17.89	QP	100	1	


Spurious Emissions, TX Mode, 9k-30M



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

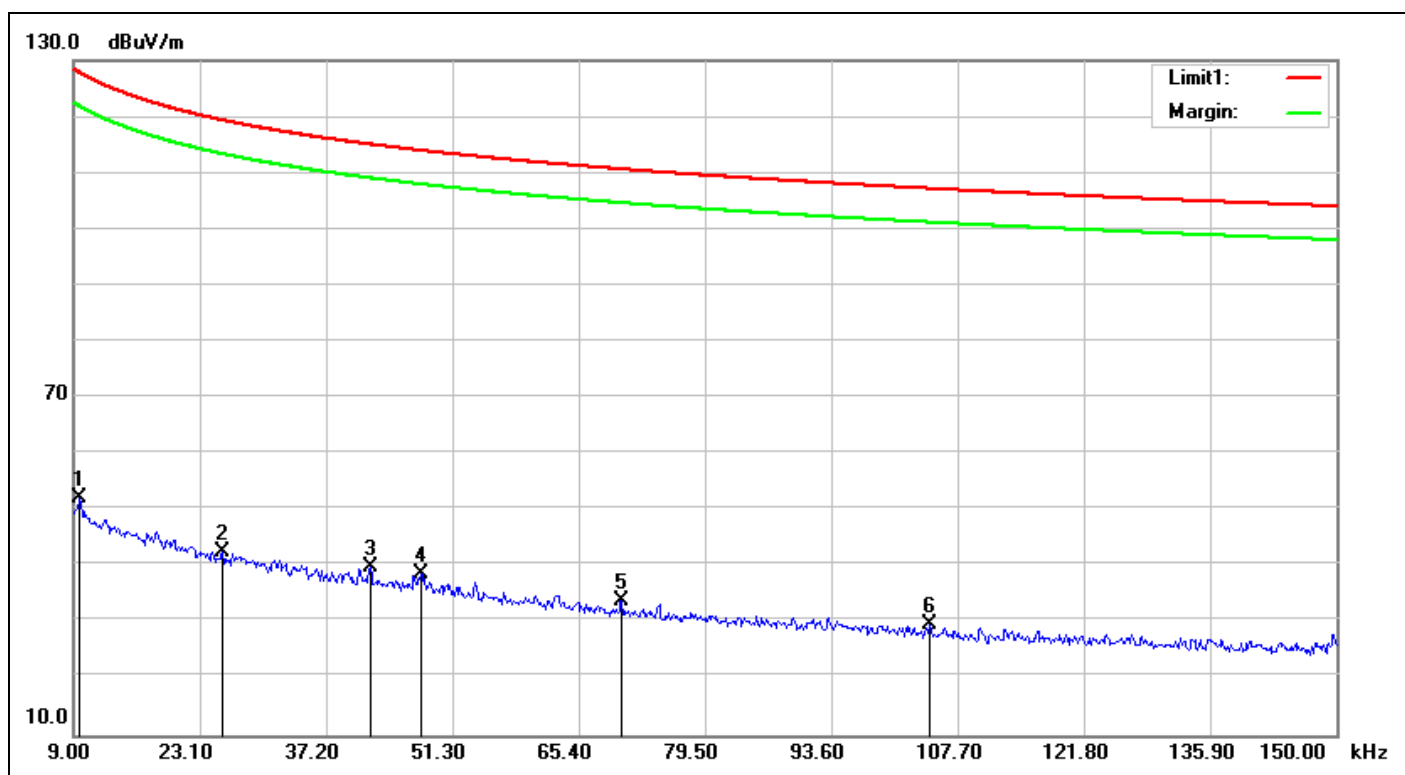

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	N/A
Test item:	Radiation Emission	Test Time:	2018/7/23 19:32:31
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0097	18.47	33.56	52.03	127.75	-75.72	QP	100	43	
2	0.0256	19.16	23.53	42.69	119.35	-76.66	QP	100	48	
3	0.0421	19.09	20.73	39.82	115.05	-75.23	QP	100	320	
4	0.0478	18.97	19.81	38.78	113.95	-75.17	QP	100	283	
5	0.0701	18.69	15.14	33.83	110.63	-76.80	QP	100	360	
6	0.1046	18.33	11.20	29.53	107.17	-77.64	QP	100	73	

Spurious Emissions, TX Mode, 9K-30M

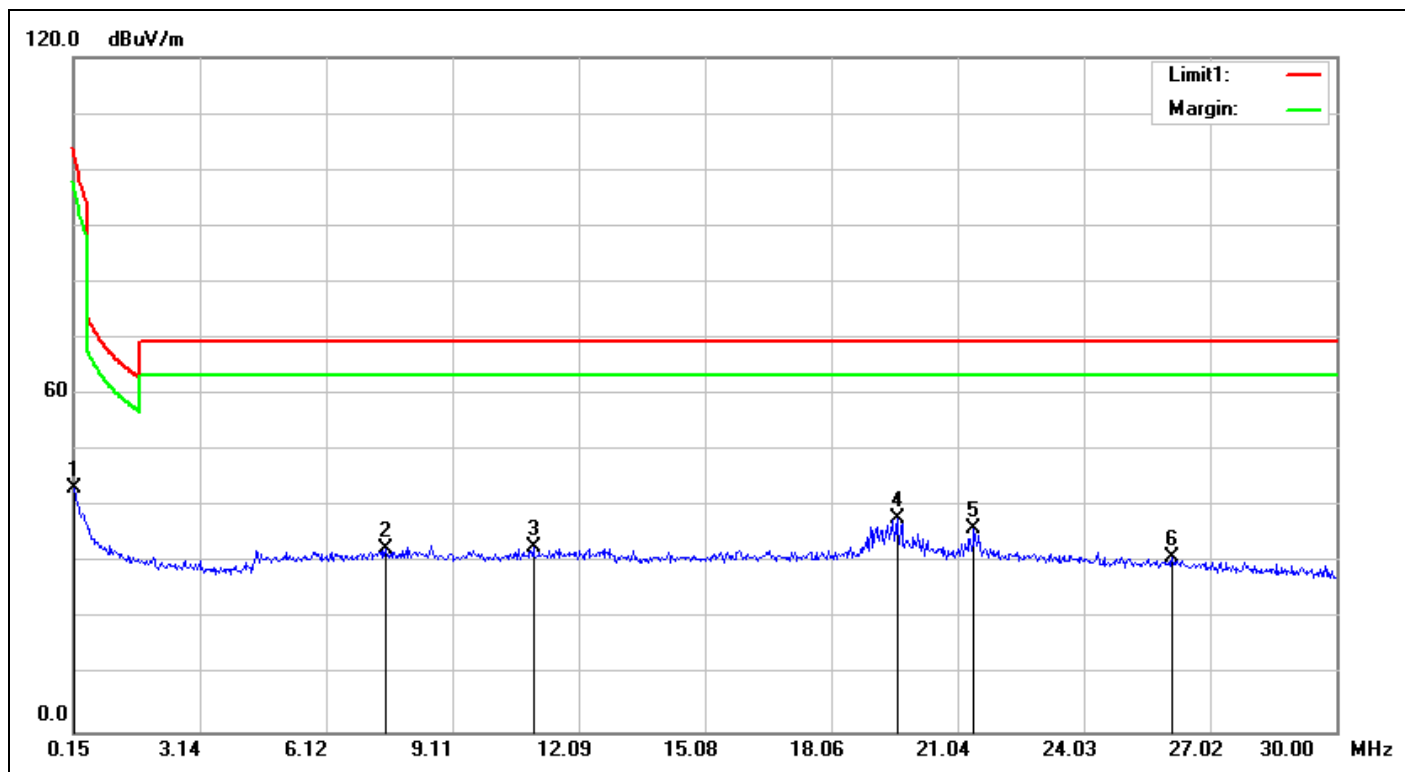

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	N/A
Test item:	Radiation Emission	Test Time:	2018/7/23 19:30:57
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	MX-6	Test Engineer:	Kevin Kuo
Test Mode:	TX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1799	18.37	24.99	43.36	102.47	-59.11	QP	100	272	
2	7.5229	19.95	12.53	32.48	69.50	-37.02	QP	100	96	
3	11.0153	20.55	12.25	32.80	69.50	-36.70	QP	100	258	
4	19.6122	21.55	16.39	37.94	69.50	-31.56	QP	100	131	
5	21.4331	21.65	14.41	36.06	69.50	-33.44	QP	100	0	
6	26.1195	21.82	9.12	30.94	69.50	-38.56	QP	100	317	


Spurious Emissions, RX Mode, 1-18G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

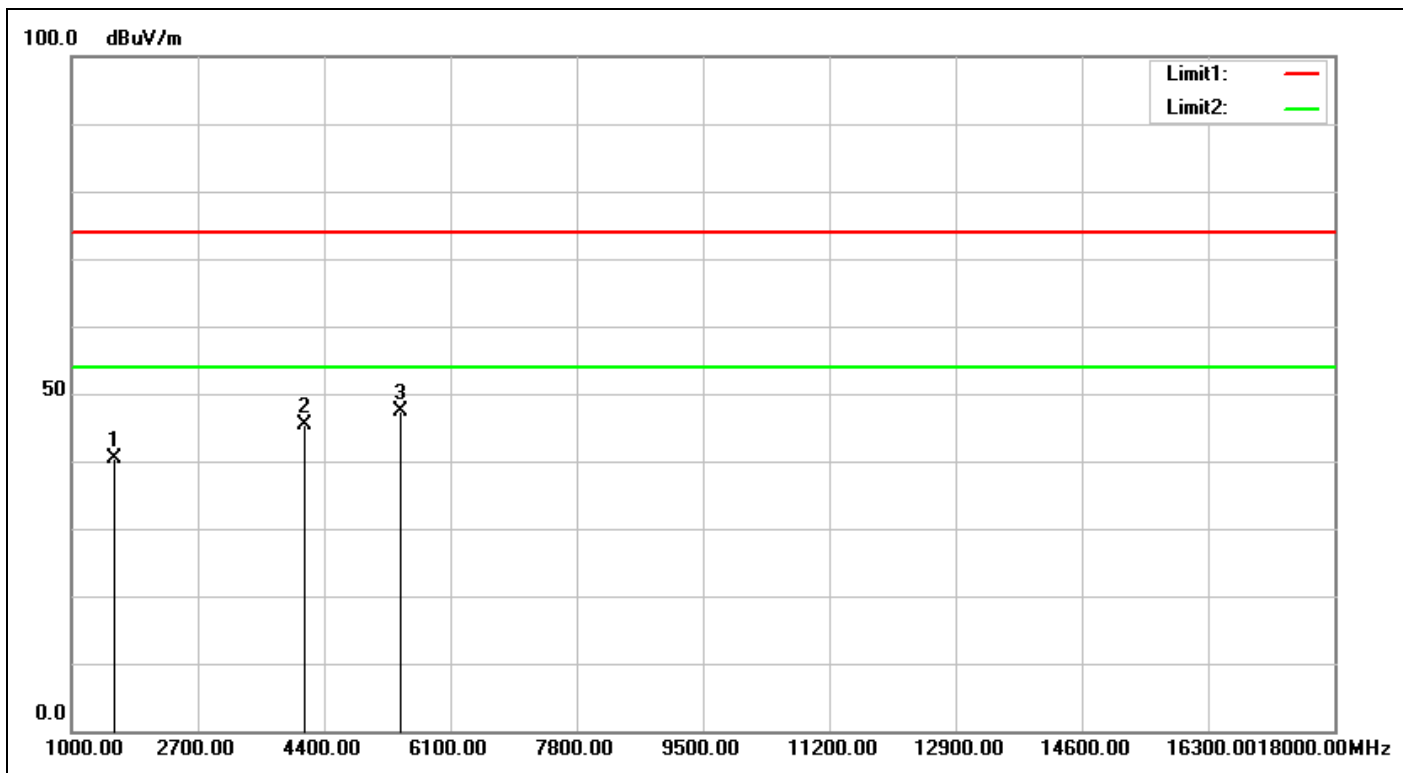

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 20:27:03
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	RX-391W	Test Engineer:	Kevin Kuo
Test Mode:	RX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1578.000	-9.88	50.21	40.33	74.00	-33.67	peak	100	114	
2	4145.000	-4.68	49.98	45.30	74.00	-28.70	peak	100	217	
3	5420.000	-0.05	47.44	47.39	74.00	-26.61	peak	100	280	

Spurious Emissions, RX Mode, 1-26G

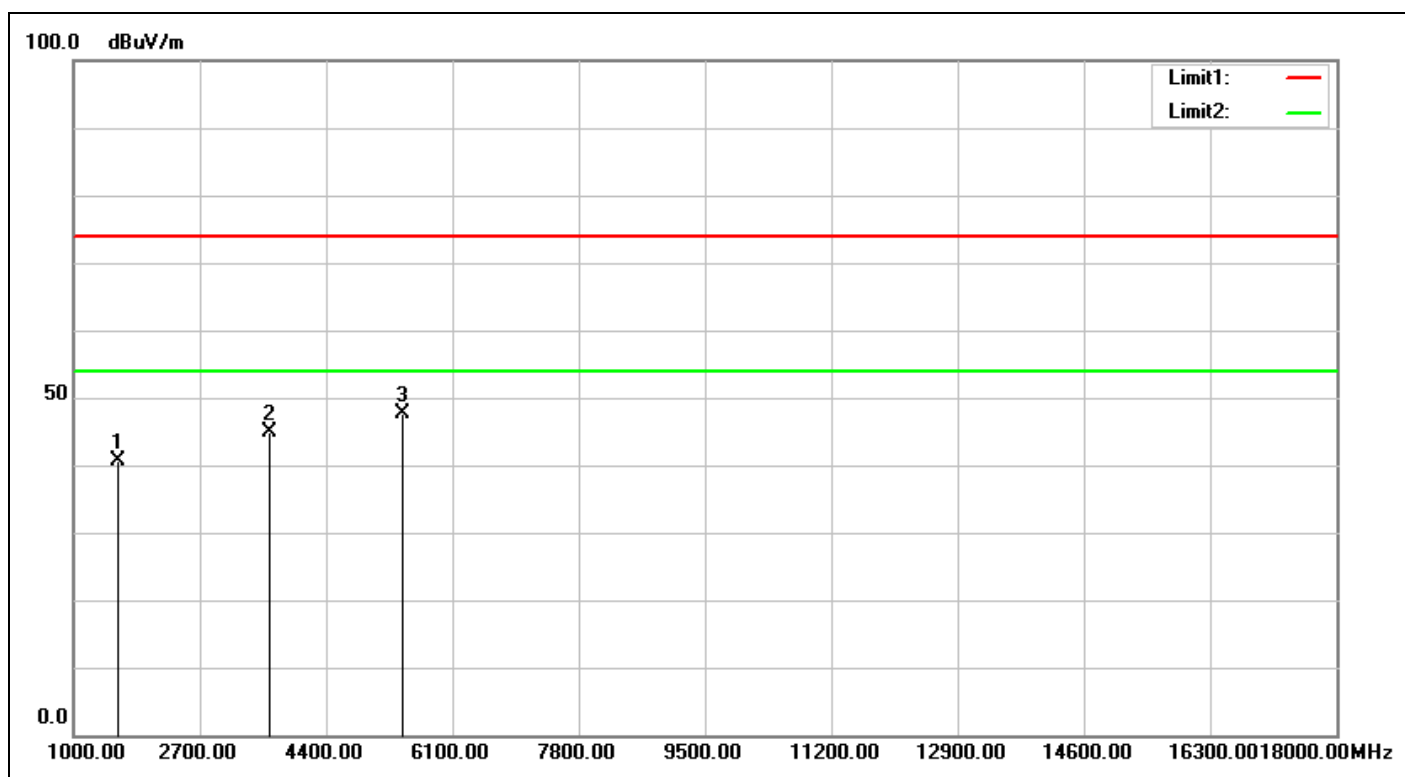

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 20:28:06
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	RX-391W	Test Engineer:	Kevin Kuo
Test Mode:	RX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1595.000	-9.77	50.37	40.60	74.00	-33.40	peak	100	11	
2	3635.000	-5.72	50.68	44.96	74.00	-29.04	peak	100	302	
3	5437.000	0.02	47.51	47.53	74.00	-26.47	peak	100	133	


Spurious Emissions, RX Mode, 18-26G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

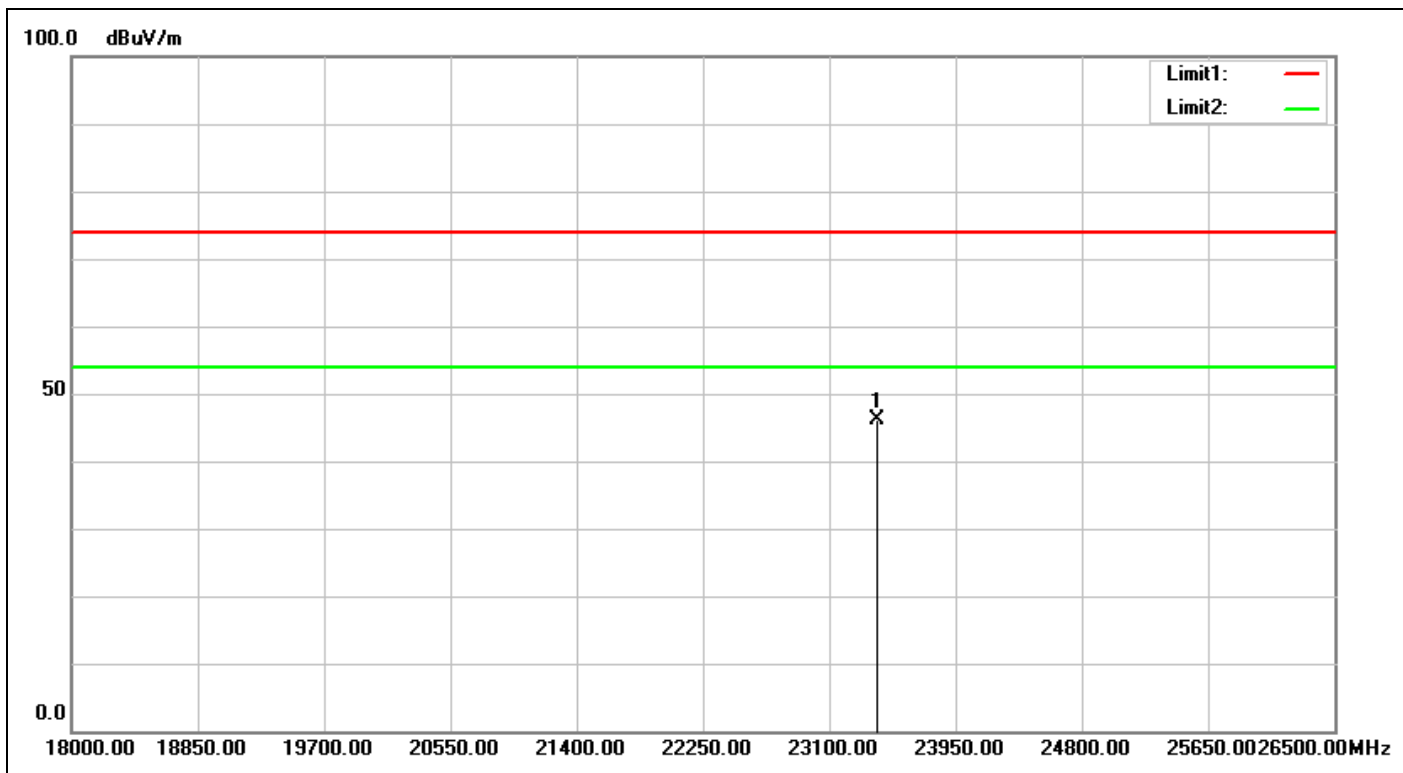

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 20:38:17
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	RX-391W	Test Engineer:	Kevin Kuo
Test Mode:	RX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23423.000	5.78	40.23	46.01	74.00	-27.99	peak	100	255	

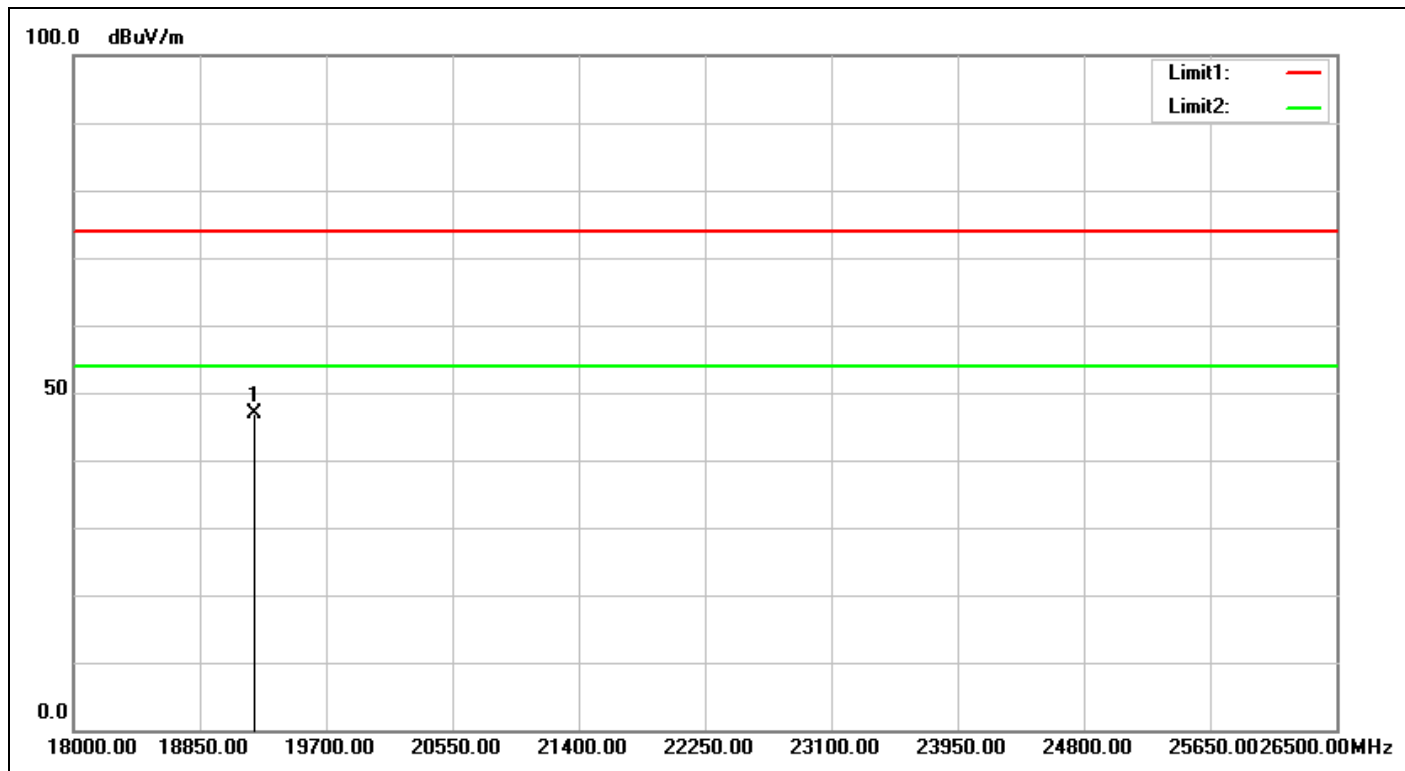

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 20:39:20
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	RX-391W	Test Engineer:	Kevin Kuo
Test Mode:	RX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19215.500	4.15	42.64	46.79	74.00	-27.21	peak	100	99	


Spurious Emissions, RX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

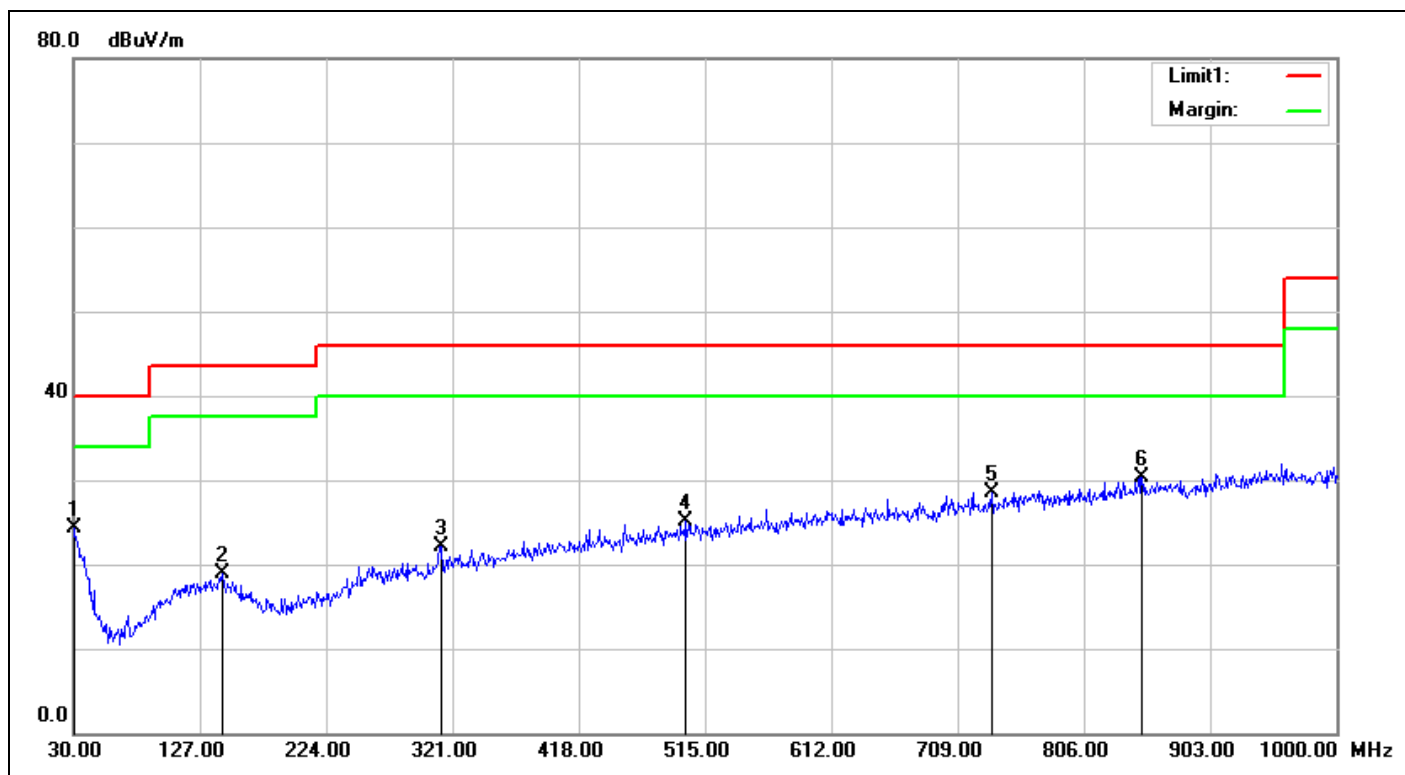

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/7/23 19:17:43
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	RX-391W	Test Engineer:	Kevin Kuo
Test Mode:	RX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.47	24.72	24.25	40.00	-15.75	QP	100	232	
2	144.4600	-7.66	26.48	18.82	43.50	-24.68	QP	100	99	
3	312.2699	-5.00	27.13	22.13	46.00	-23.87	QP	100	61	
4	500.4499	-2.11	27.28	25.17	46.00	-20.83	QP	100	176	
5	735.1900	0.94	27.65	28.59	46.00	-17.41	QP	100	0	
6	850.6200	2.57	27.80	30.37	46.00	-15.63	QP	100	30	

Spurious Emissions, RX Mode, 30MHz-1GHz

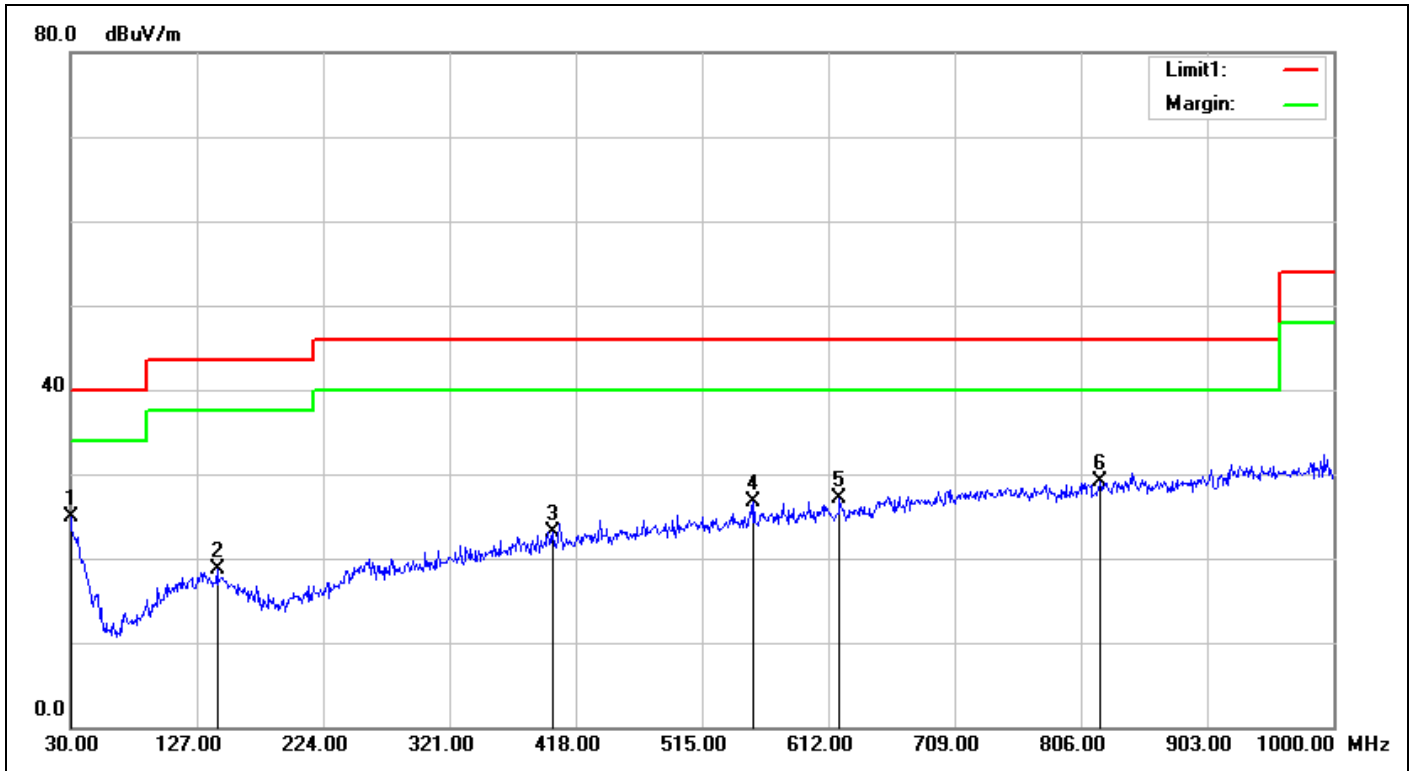

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/7/23 19:18:47
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	RX-391W	Test Engineer:	Kevin Kuo
Test Mode:	RX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.47	25.40	24.93	40.00	-15.07	QP	100	283	
2	142.5200	-7.59	26.36	18.77	43.50	-24.73	QP	100	293	
3	400.5400	-3.26	26.41	23.15	46.00	-22.85	QP	100	22	
4	554.7700	-1.38	28.01	26.63	46.00	-19.37	QP	100	109	
5	620.7300	-0.77	27.94	27.17	46.00	-18.83	QP	100	317	
6	820.5500	2.03	27.03	29.06	46.00	-16.94	QP	100	285	


Spurious Emissions, RX Mode, 9K-30M



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

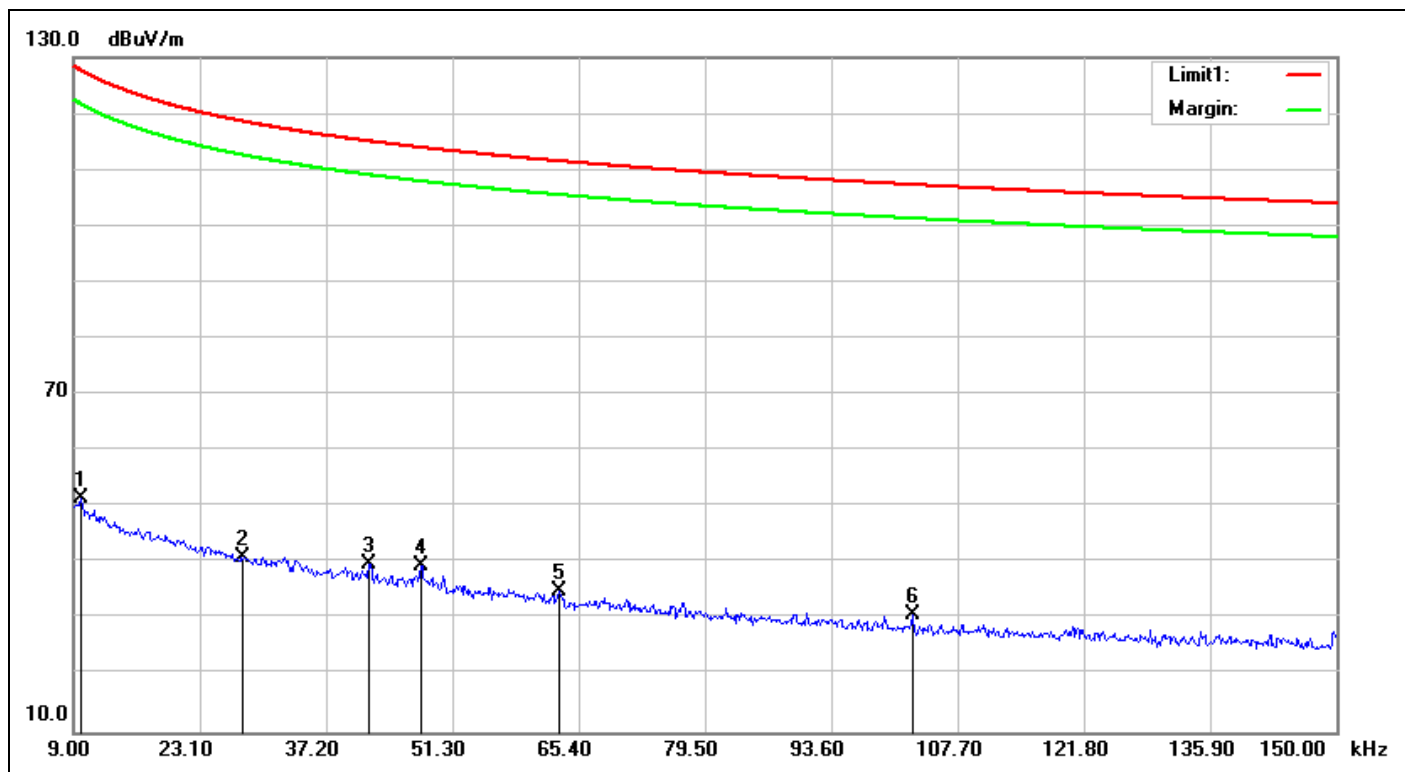

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	N/A
Test item:	Radiation Emission	Test Time:	2018/7/23 19:25:10
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	RX-391W	Test Engineer:	Kevin Kuo
Test Mode:	RX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0098	18.48	33.06	51.54	127.67	-76.13	QP	100	312	
2	0.0278	19.25	21.87	41.12	118.64	-77.52	QP	100	152	
3	0.0420	19.09	20.83	39.92	115.07	-75.15	QP	100	288	
4	0.0478	18.97	20.70	39.67	113.95	-74.28	QP	100	283	
5	0.0631	18.77	16.14	34.91	111.54	-76.63	QP	100	115	
6	0.1026	18.33	12.47	30.80	107.33	-76.53	QP	100	301	

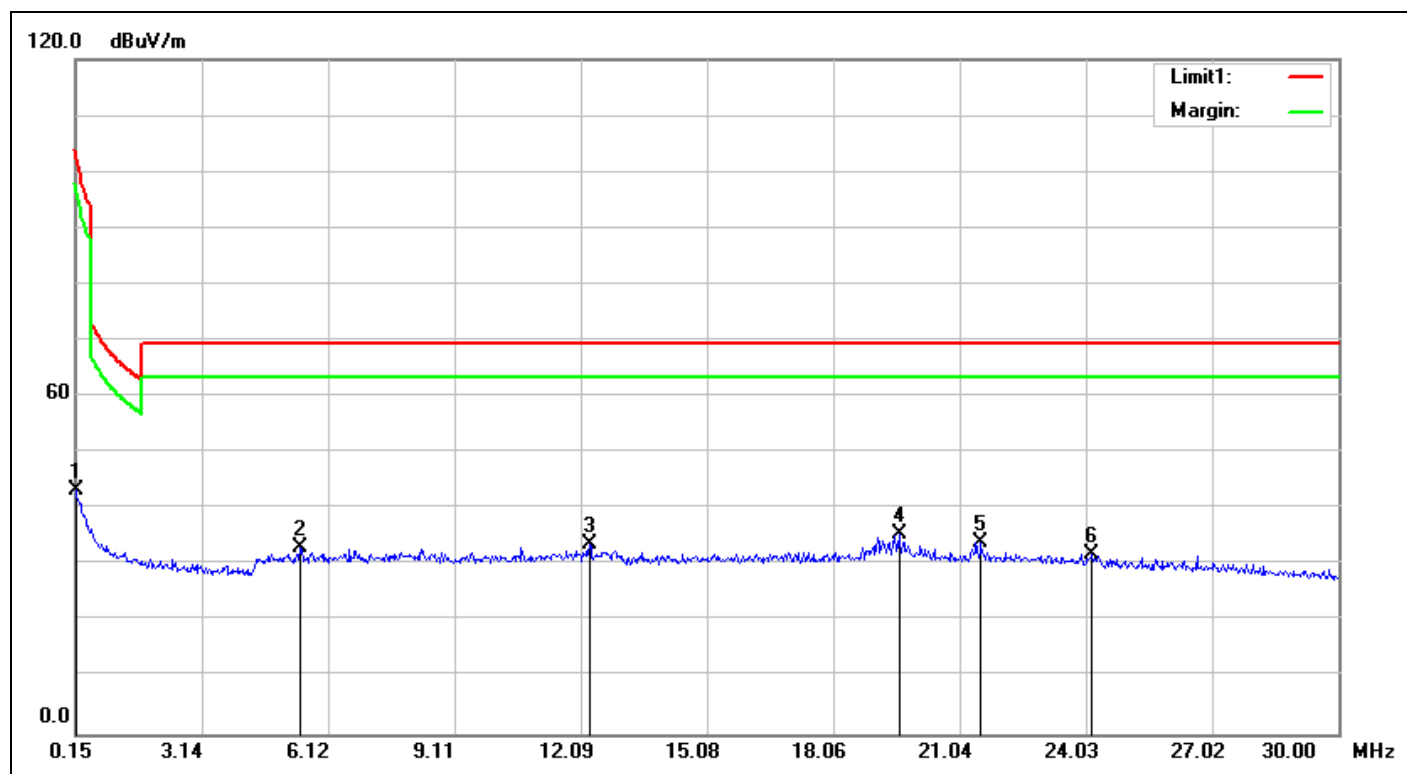

Service No.:	11407552	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	N/A
Test item:	Radiation Emission	Test Time:	2018/7/23 19:27:17
Applicant:	千喆企業有限公司	Test Rating:	DC 6V
Product:	Sanwa MX-6/RX-391W(with 2.4GHz function)	Temp.(°C)/Hum.(%):	21(°C)/49%
Model No.:	RX-391W	Test Engineer:	Kevin Kuo
Test Mode:	RX-2426.5		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1500	18.35	25.13	43.48	104.05	-60.57	QP	100	283	
2	5.4633	19.55	13.55	33.10	69.50	-36.40	QP	100	269	
3	12.2989	20.70	13.05	33.75	69.50	-35.75	QP	100	3	
4	19.6122	21.55	13.93	35.48	69.50	-34.02	QP	100	131	
5	21.5525	21.66	12.31	33.97	69.50	-35.53	QP	100	203	
6	24.1792	21.76	10.10	31.86	69.50	-37.64	QP	100	357	