


Site: AC1	Time: 2018/11/29 - 17:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5320MHz (Beam-Forming Mode)	

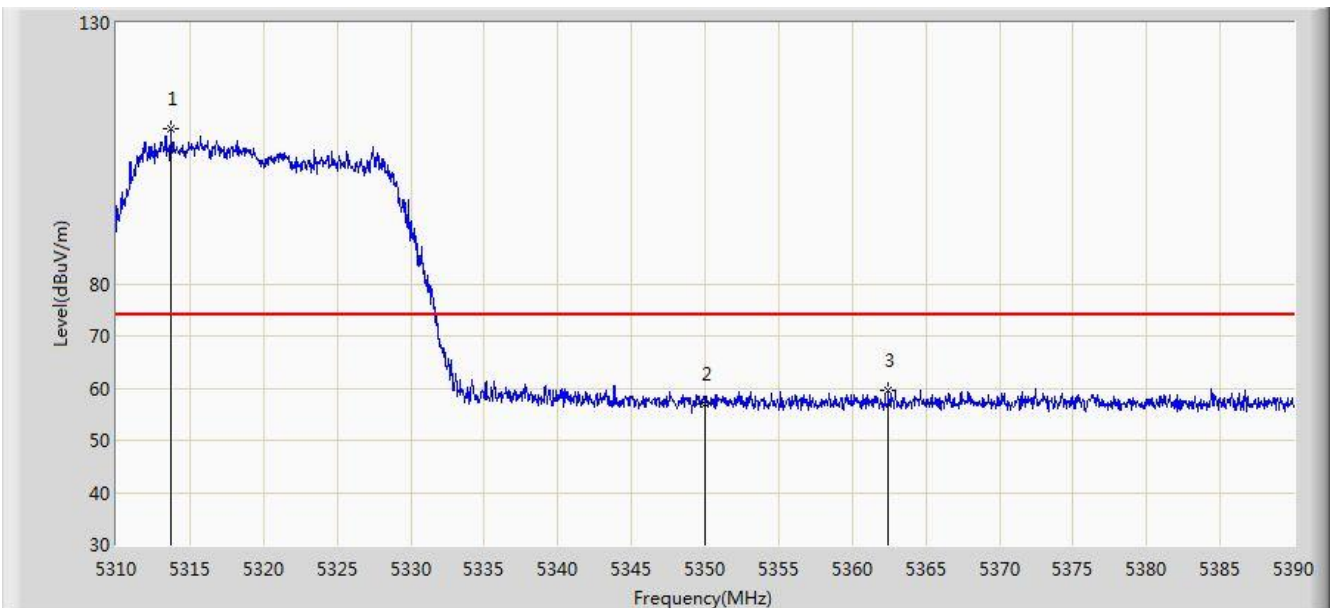


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.720	109.714	105.877	N/A	N/A	3.836	PK
2			5350.000	57.000	53.095	-17.000	74.000	3.904	PK
3			5362.480	59.702	55.775	-14.298	74.000	3.927	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5320MHz (Beam-Forming Mode)	

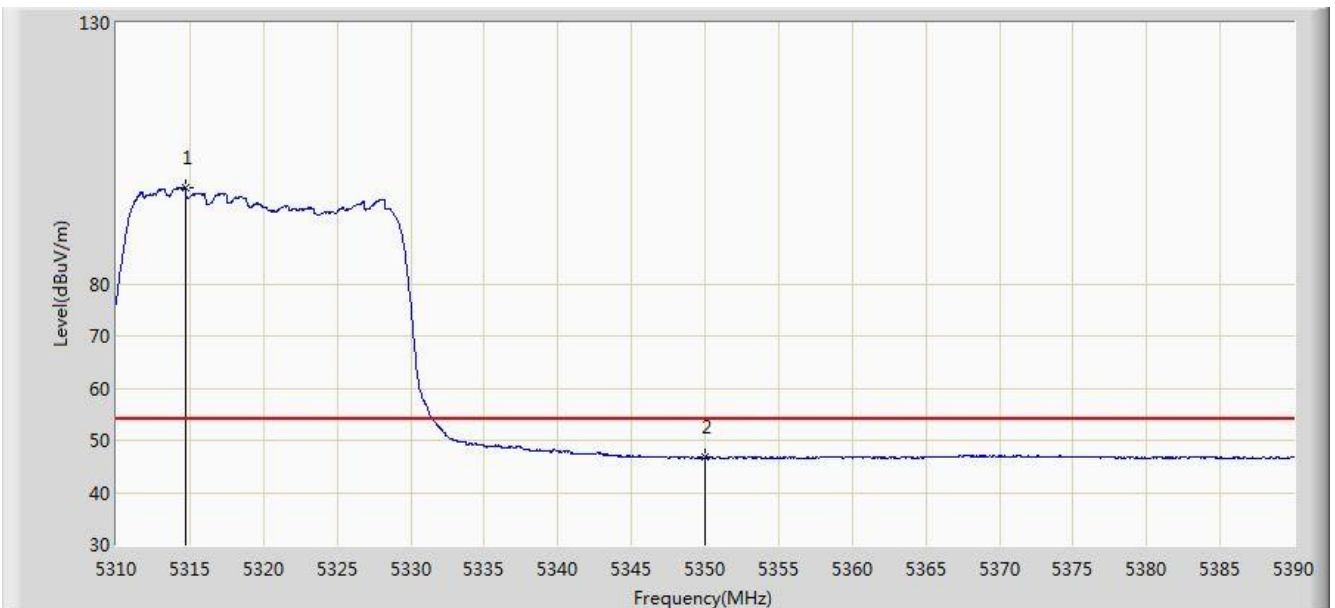


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.680	98.325	94.486	N/A	N/A	3.838	AV
2			5350.000	46.737	42.832	-7.263	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5500MHz (Beam-Forming Mode)	

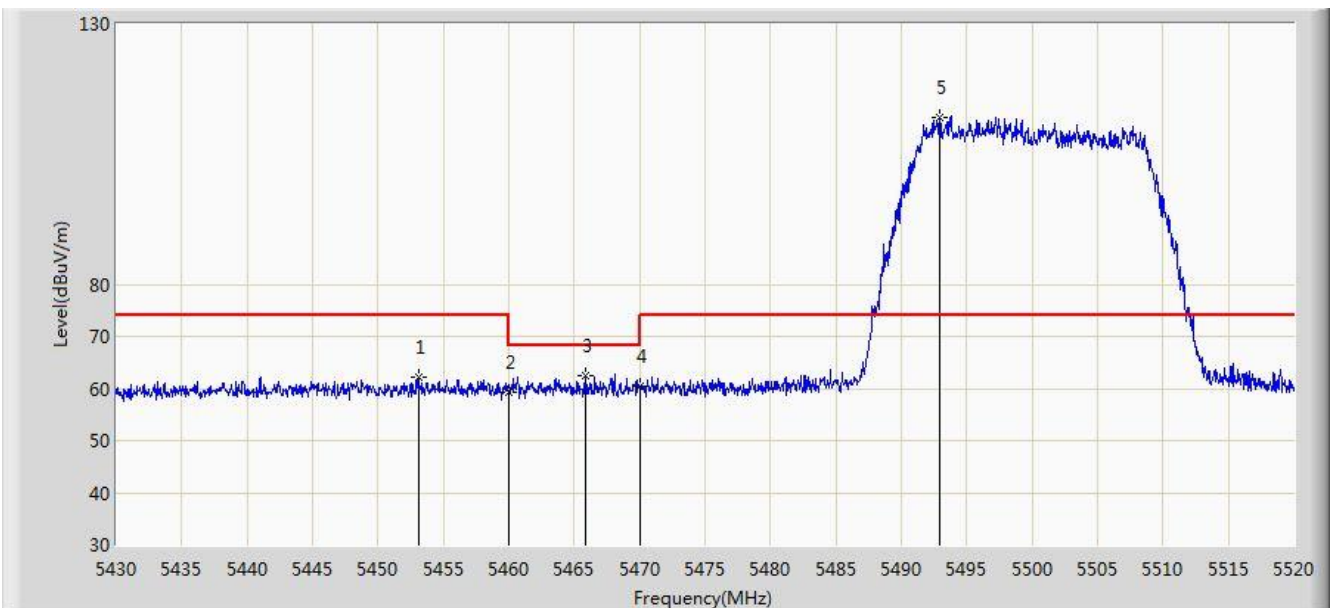


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.130	62.146	57.981	-11.854	74.000	4.164	PK
2			5460.000	59.375	55.195	-14.625	74.000	4.180	PK
3			5465.820	62.506	58.313	-5.694	68.200	4.193	PK
4			5470.000	60.379	56.177	-7.821	68.200	4.202	PK
5		*	5492.955	112.149	107.894	N/A	N/A	4.254	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5500MHz (Beam-Forming Mode)	

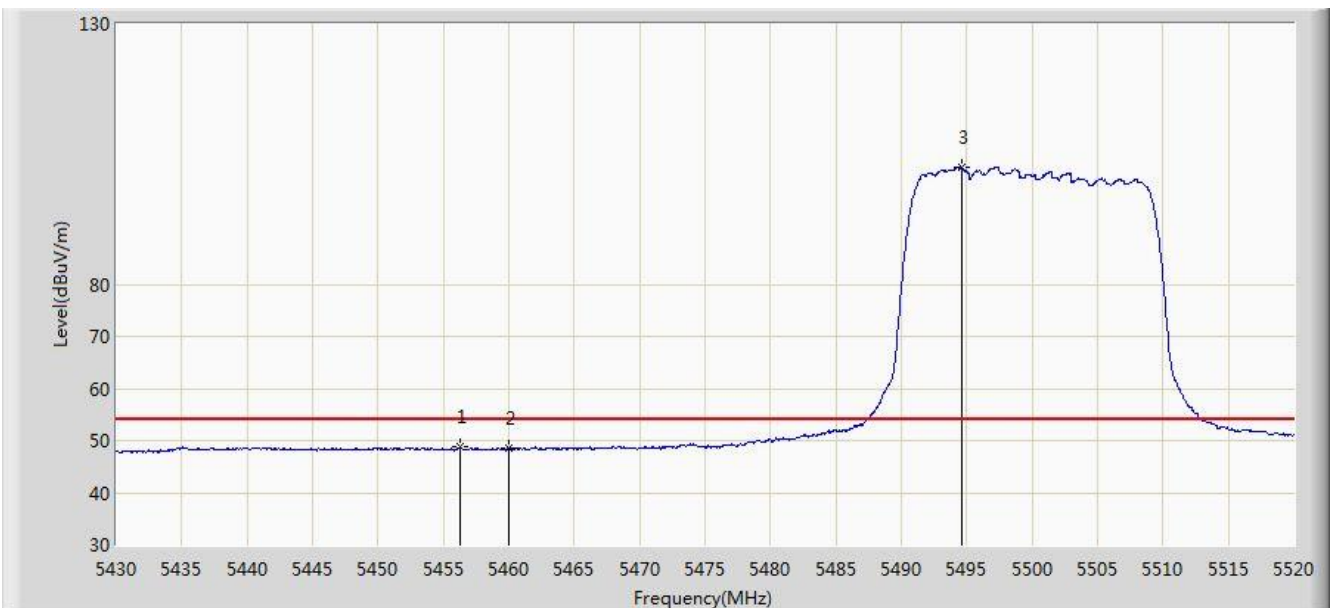


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.235	48.743	44.571	-5.257	54.000	4.172	AV
2			5460.000	48.461	44.281	-5.539	54.000	4.180	AV
3		*	5494.620	102.517	98.259	N/A	N/A	4.259	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5500MHz (Beam-Forming Mode)	

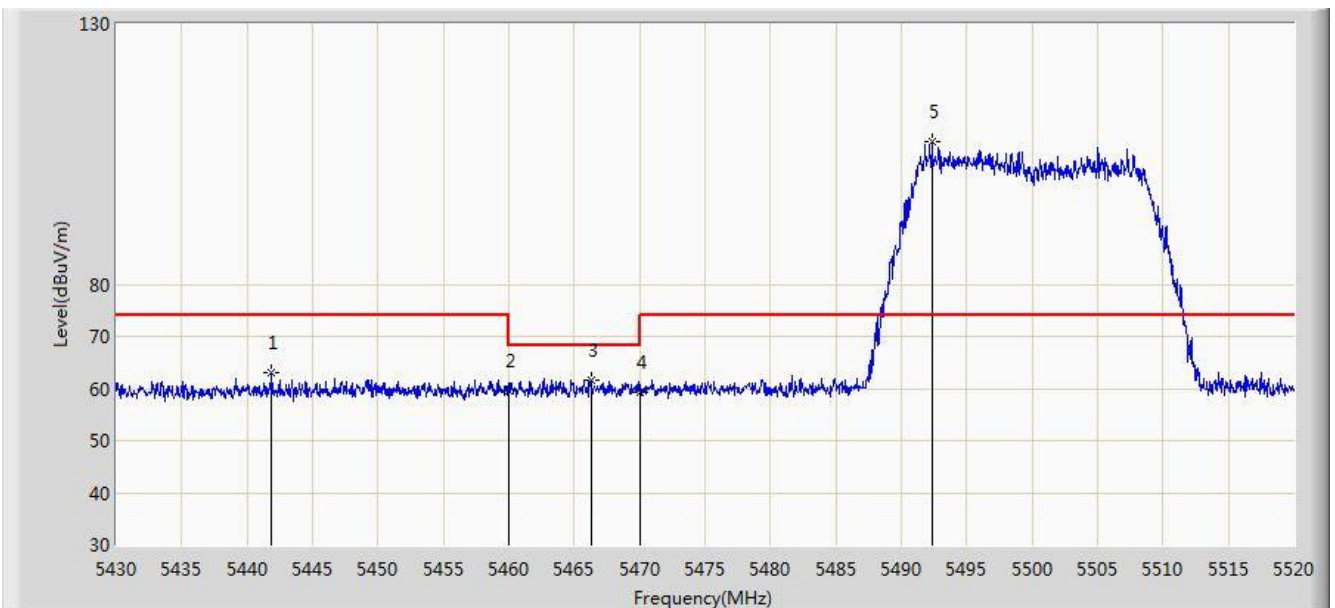


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.880	62.943	58.813	-11.057	74.000	4.130	PK
2			5460.000	59.532	55.352	-14.468	74.000	4.180	PK
3			5466.315	61.565	57.371	-6.635	68.200	4.194	PK
4			5470.000	59.399	55.197	-8.801	68.200	4.202	PK
5		*	5492.370	107.343	103.090	N/A	N/A	4.253	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5500MHz (Beam-Forming Mode)	

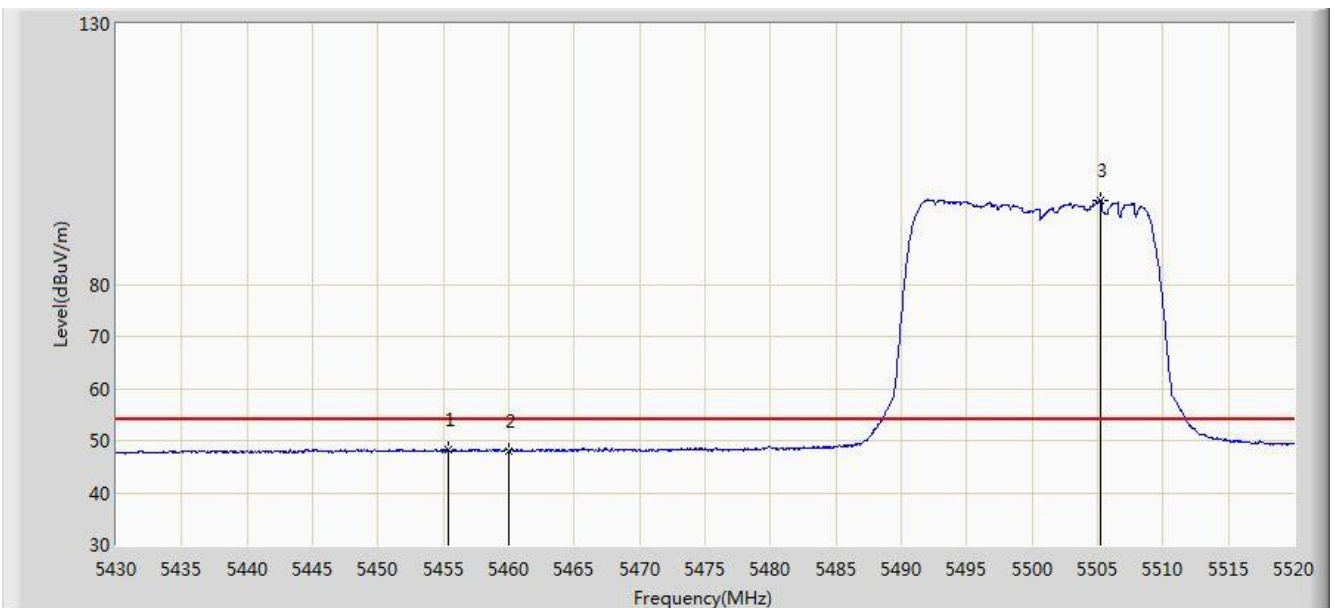


d	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.335	48.210	44.040	-5.790	54.000	4.170	AV
2			5460.000	48.061	43.881	-5.939	54.000	4.180	AV
3		*	5505.240	96.176	91.889	N/A	N/A	4.287	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5700MHz (Beam-Forming Mode)	

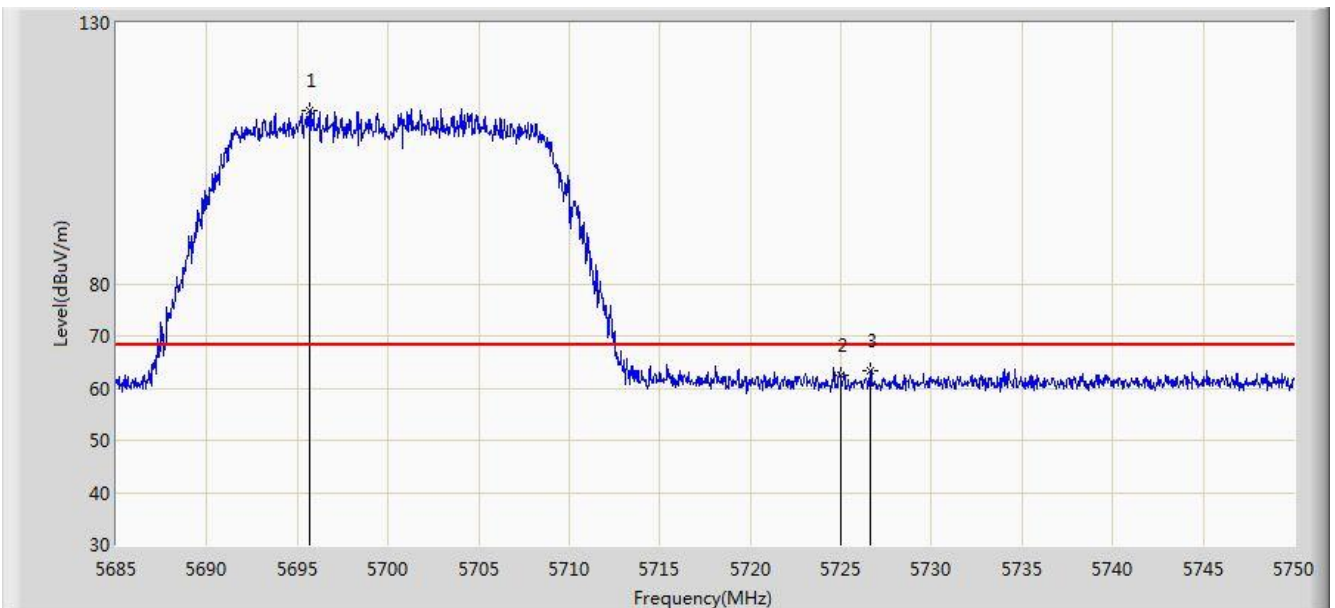


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.692	113.150	108.295	N/A	N/A	4.855	PK
2			5725.000	62.407	57.378	-5.793	68.200	5.029	PK
3			5726.632	63.349	58.310	-4.851	68.200	5.039	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5700MHz (Beam-Forming Mode)	

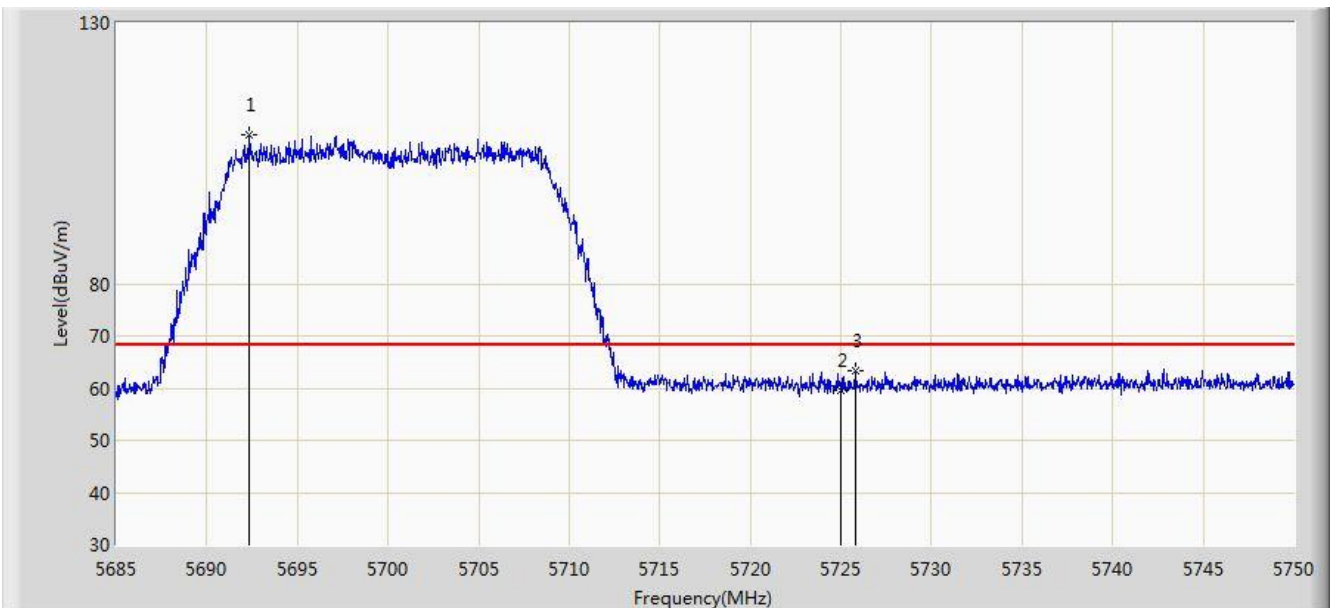


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5692.345	108.406	103.568	N/A	N/A	4.838	PK
2			5725.000	59.606	54.577	-8.594	68.200	5.029	PK
3			5725.788	63.194	58.160	-5.006	68.200	5.033	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5745MHz (Beam-Forming Mode)	

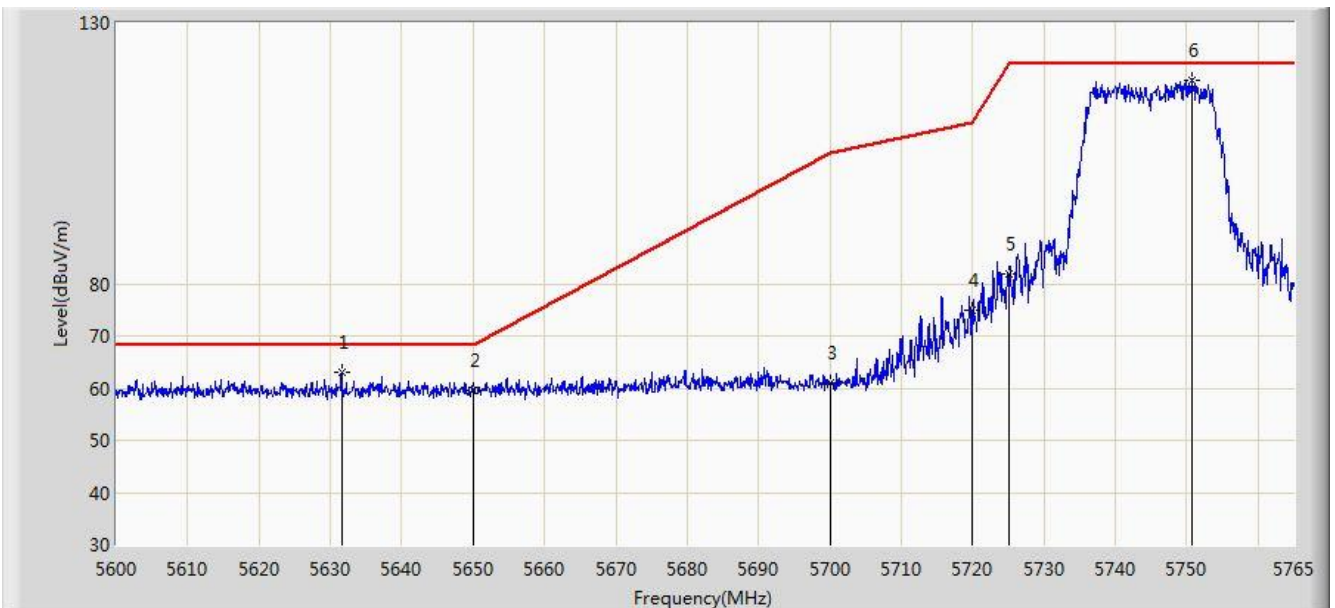


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.598	62.960	58.346	-5.240	68.200	4.614	PK
2			5650.000	59.610	54.939	-8.590	68.200	4.671	PK
3			5700.000	61.027	56.149	-44.173	105.200	4.878	PK
4			5720.000	74.809	69.812	-35.991	110.800	4.997	PK
5			5725.000	82.007	76.978	-40.193	122.200	5.029	PK
6		*	5750.645	119.050	113.863	N/A	N/A	5.187	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5745MHz (Beam-Forming Mode)	

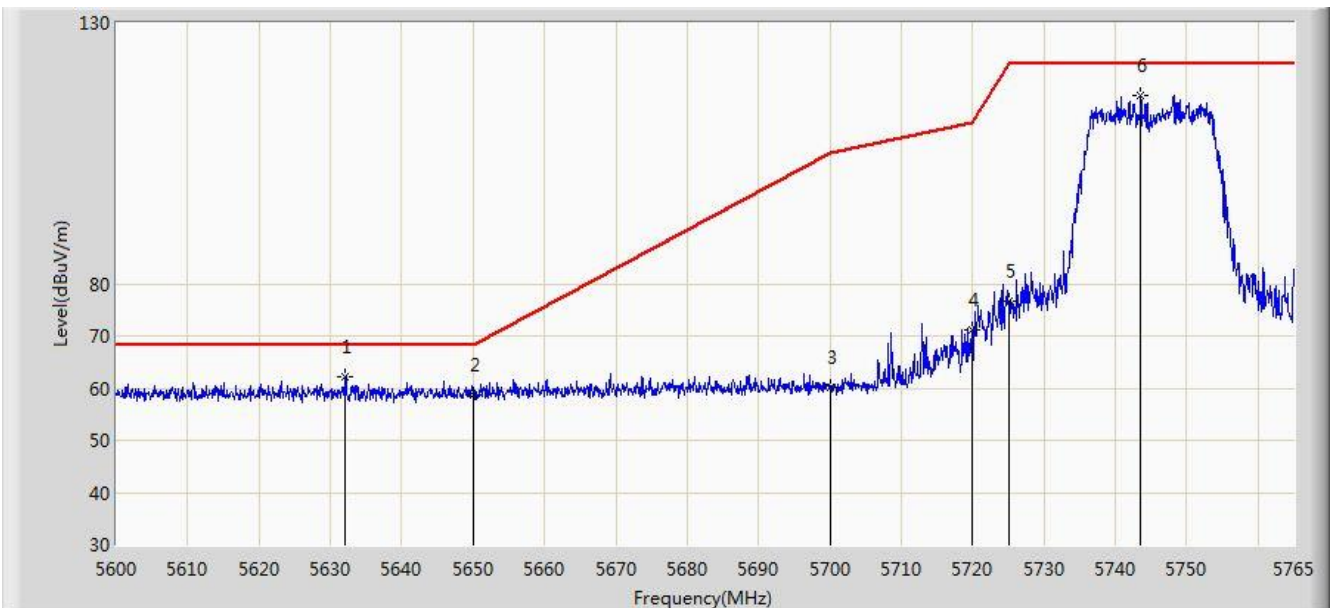


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.092	62.256	57.641	-5.944	68.200	4.615	PK
2			5650.000	58.612	53.941	-9.588	68.200	4.671	PK
3			5700.000	60.090	55.212	-45.110	105.200	4.878	PK
4			5720.000	71.097	66.100	-39.703	110.800	4.997	PK
5			5725.000	76.766	71.737	-45.434	122.200	5.029	PK
6			5743.550	116.145	110.998	N/A	N/A	5.147	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5825MHz (Beam-Forming Mode)	

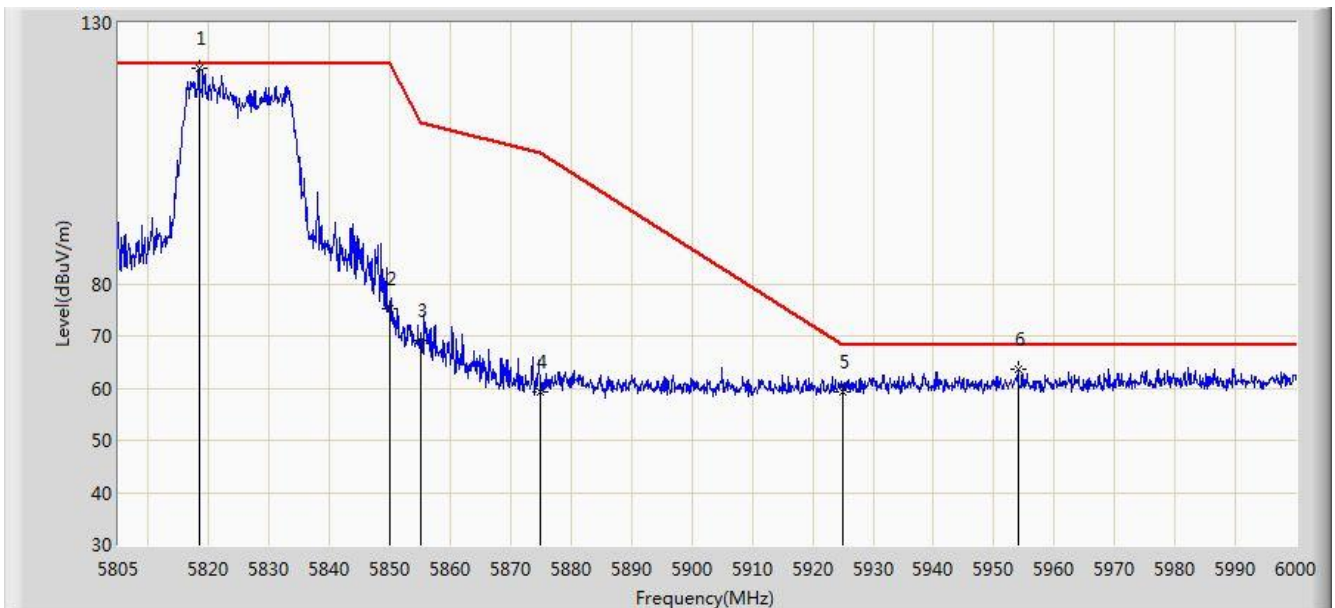


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.357	121.433	115.884	N/A	N/A	5.549	PK
2			5850.000	75.334	69.608	-46.866	122.200	5.726	PK
3			5855.000	69.034	63.288	-41.766	110.800	5.746	PK
4			5875.000	59.165	53.345	-46.035	105.200	5.820	PK
5			5925.000	59.319	53.353	-8.881	68.200	5.967	PK
6			5953.980	63.707	57.674	-4.493	68.200	6.034	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT20 at Channel 5825MHz (Beam-Forming Mode)	

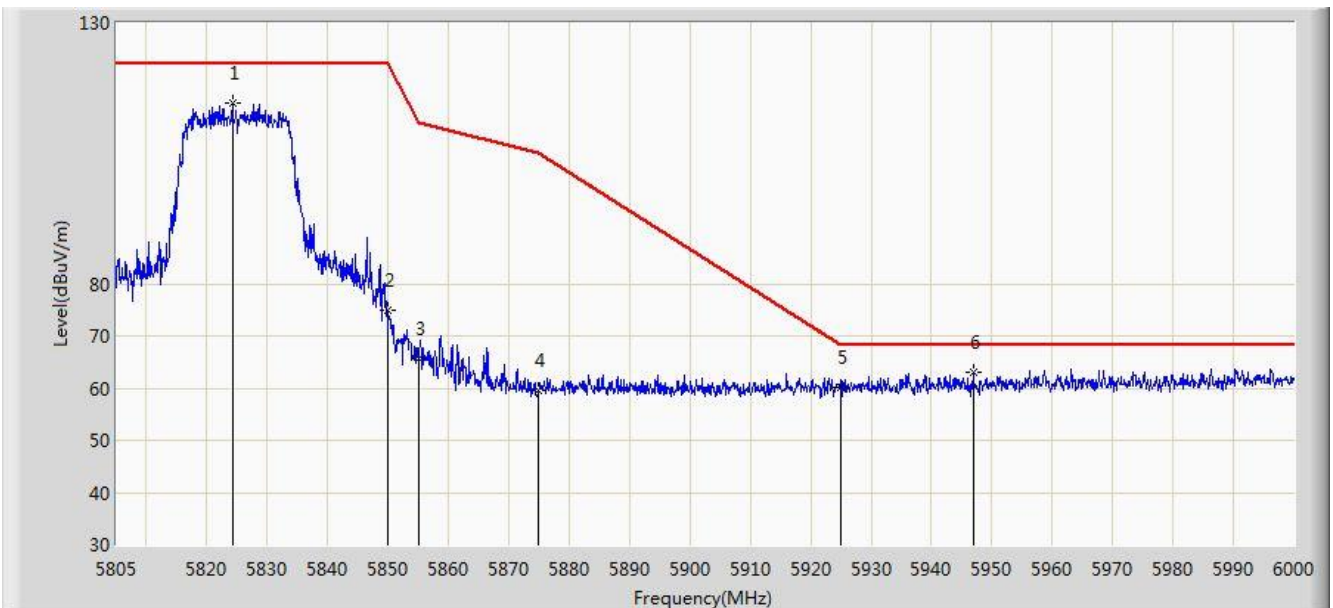


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5824.208	114.685	109.102	N/A	N/A	5.584	PK
2			5850.000	74.784	69.058	-47.416	122.200	5.726	PK
3			5855.000	65.700	59.954	-45.100	110.800	5.746	PK
4			5875.000	59.432	53.612	-45.768	105.200	5.820	PK
5			5925.000	60.085	54.119	-8.115	68.200	5.967	PK
6		*	5946.862	63.170	57.150	-5.030	68.200	6.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5190MHz (Beam-Forming Mode)	

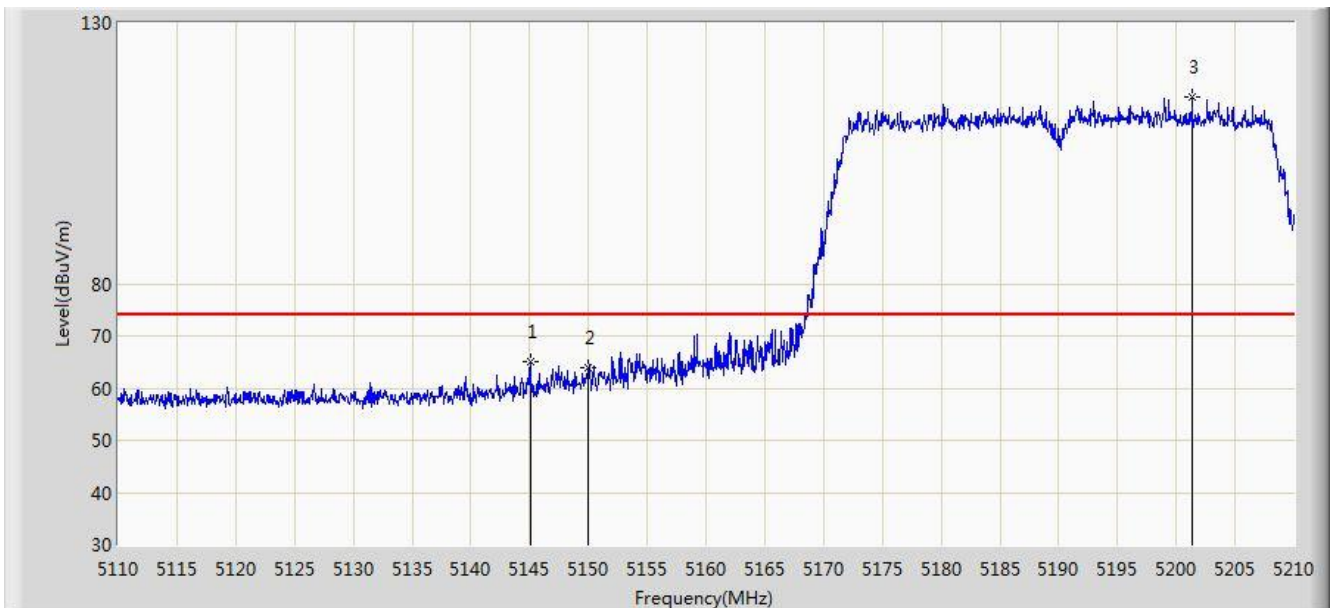


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.050	64.967	60.791	-9.033	74.000	4.176	PK
2			5150.000	63.795	59.626	-10.205	74.000	4.170	PK
3		*	5201.350	115.890	111.896	N/A	N/A	3.994	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5190MHz (Beam-Forming Mode)	

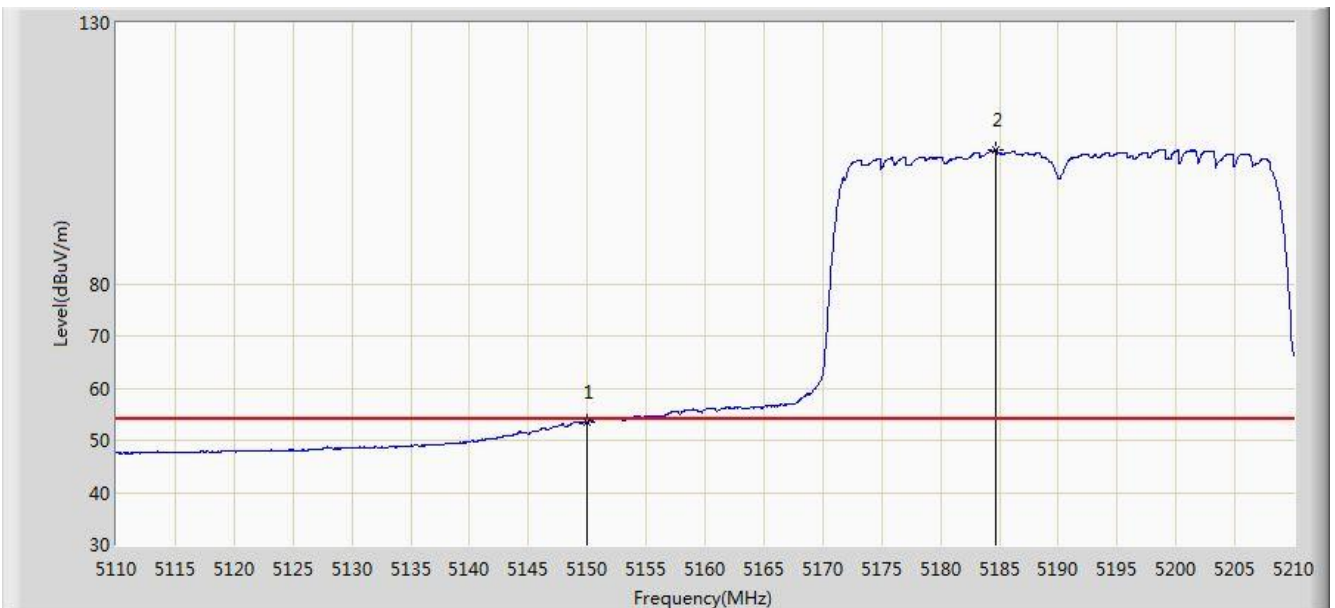


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.487	49.318	-0.513	54.000	4.170	AV
2		*	5184.650	105.621	101.569	N/A	N/A	4.053	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5190MHz (Beam-Forming Mode)	

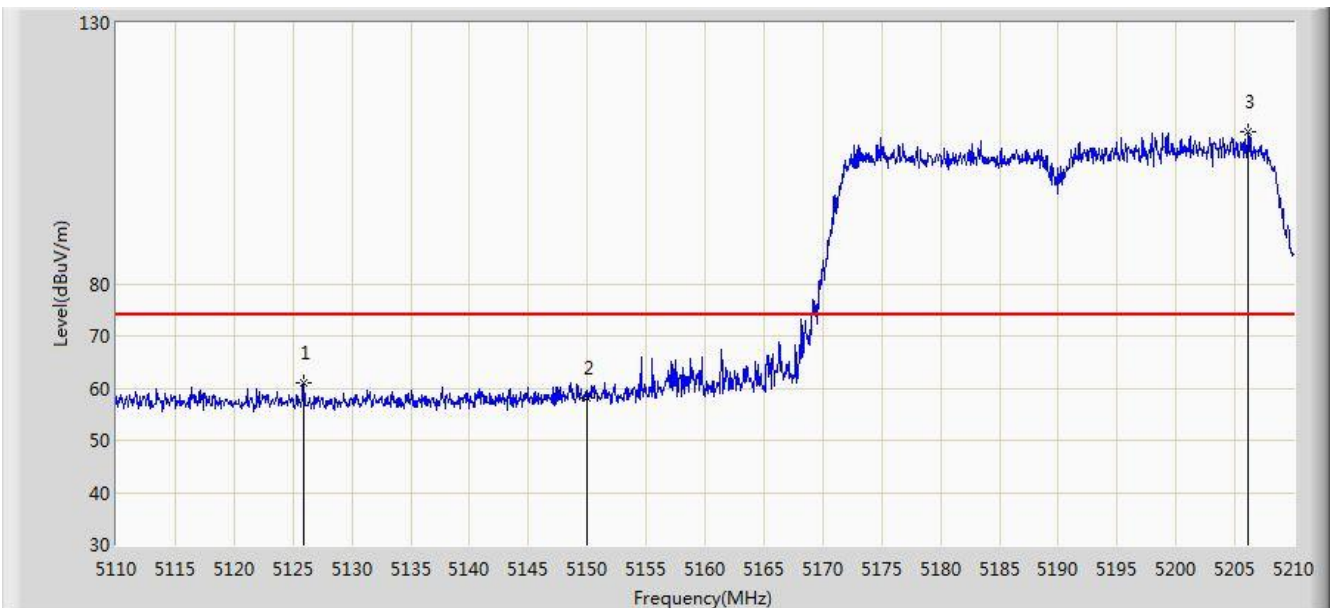


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5125.900	61.086	56.911	-12.914	74.000	4.175	PK
2			5150.000	58.121	53.952	-15.879	74.000	4.170	PK
3		*	5206.100	109.236	105.256	N/A	N/A	3.980	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5190MHz (Beam-Forming Mode)	

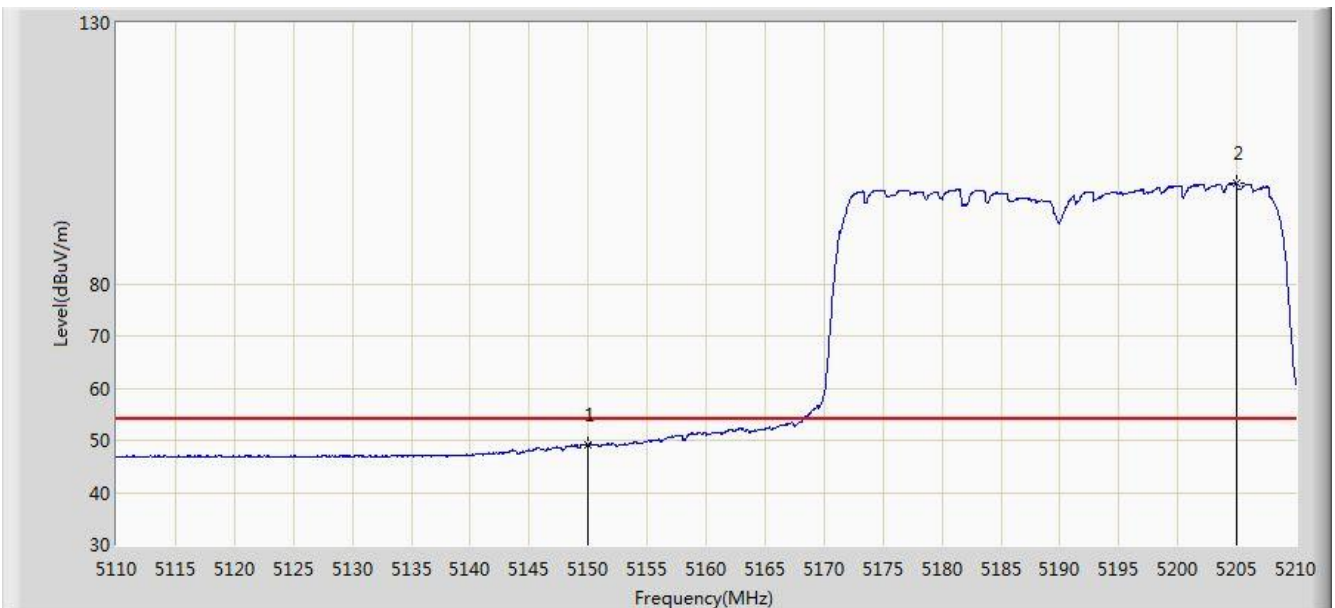


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.138	44.969	-4.862	54.000	4.170	AV
2		*	5204.950	99.254	95.270	N/A	N/A	3.983	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5230MHz (Beam-Forming Mode)	

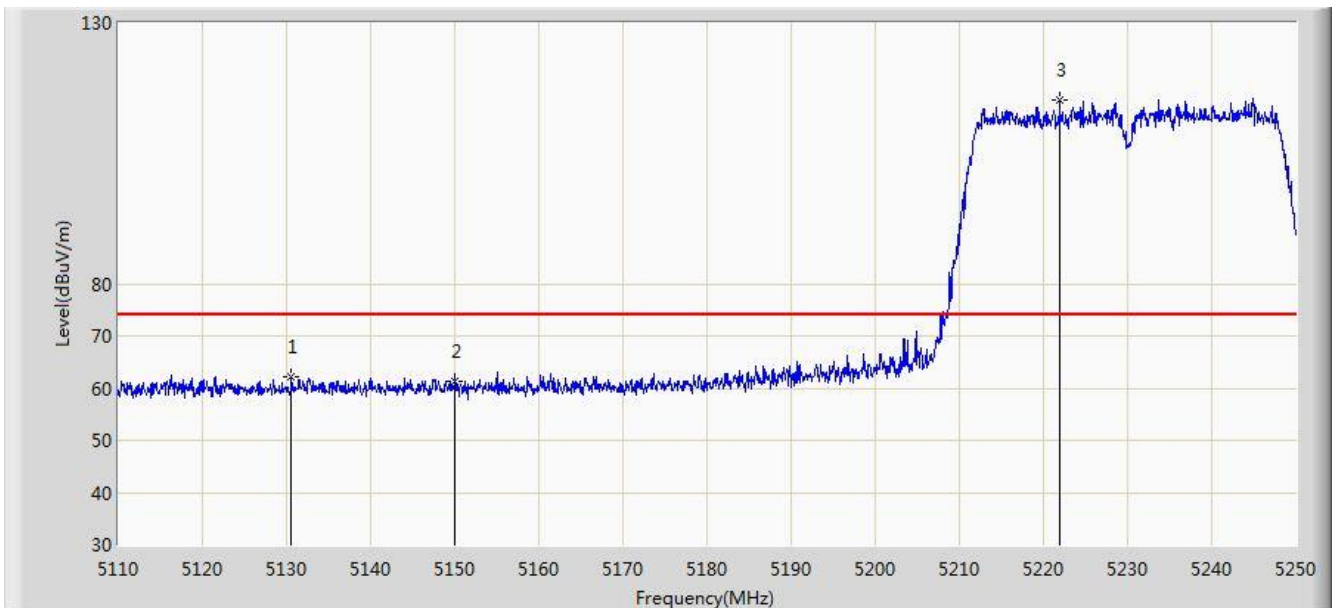


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.580	62.195	58.020	-11.805	74.000	4.174	PK
2			5150.000	61.340	57.171	-12.660	74.000	4.170	PK
3		*	5221.930	115.080	111.147	N/A	N/A	3.933	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5230MHz (Beam-Forming Mode)	

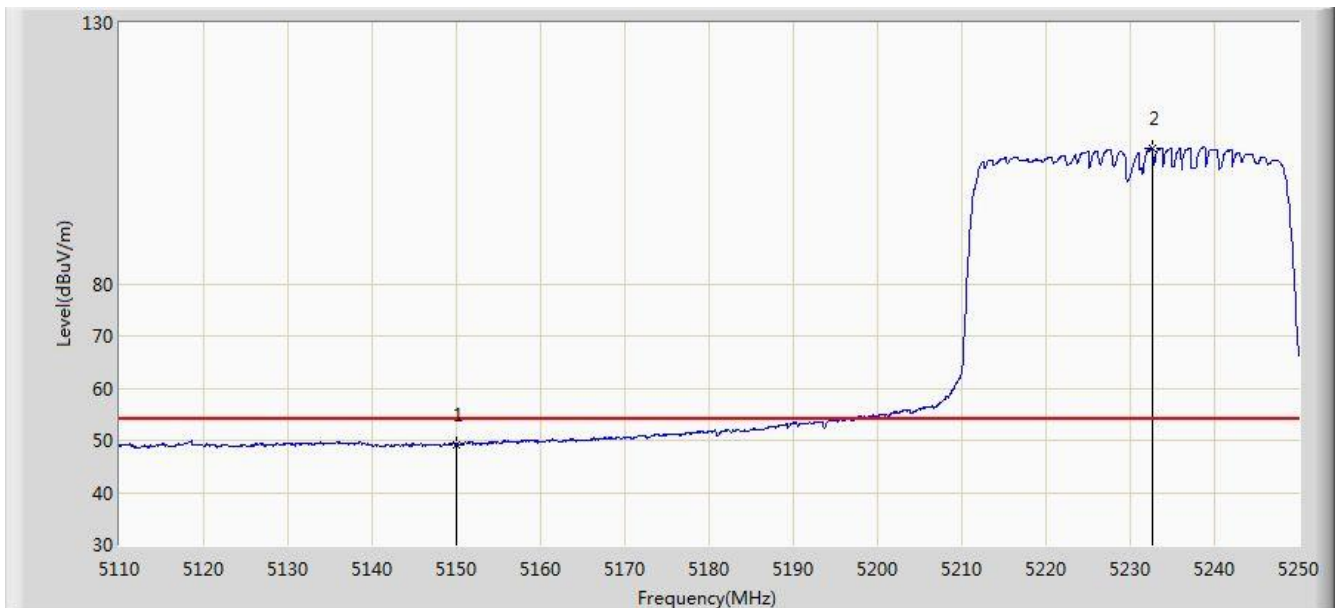


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.256	45.087	-4.744	54.000	4.170	AV
2		*	5232.710	105.933	102.032	N/A	N/A	3.902	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5230MHz (Beam-Forming Mode)	

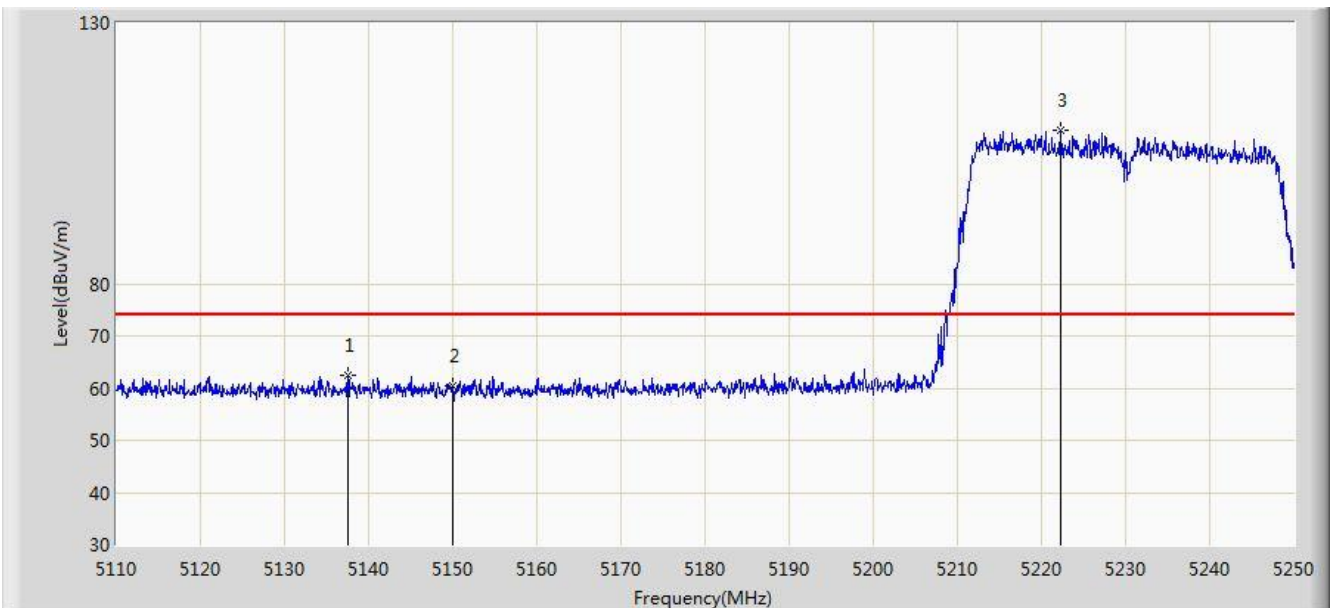


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.580	62.583	58.408	-11.417	74.000	4.175	PK
2			5150.000	60.319	56.150	-13.681	74.000	4.170	PK
3		*	5222.280	109.301	105.369	N/A	N/A	3.932	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5230MHz (Beam-Forming Mode)	

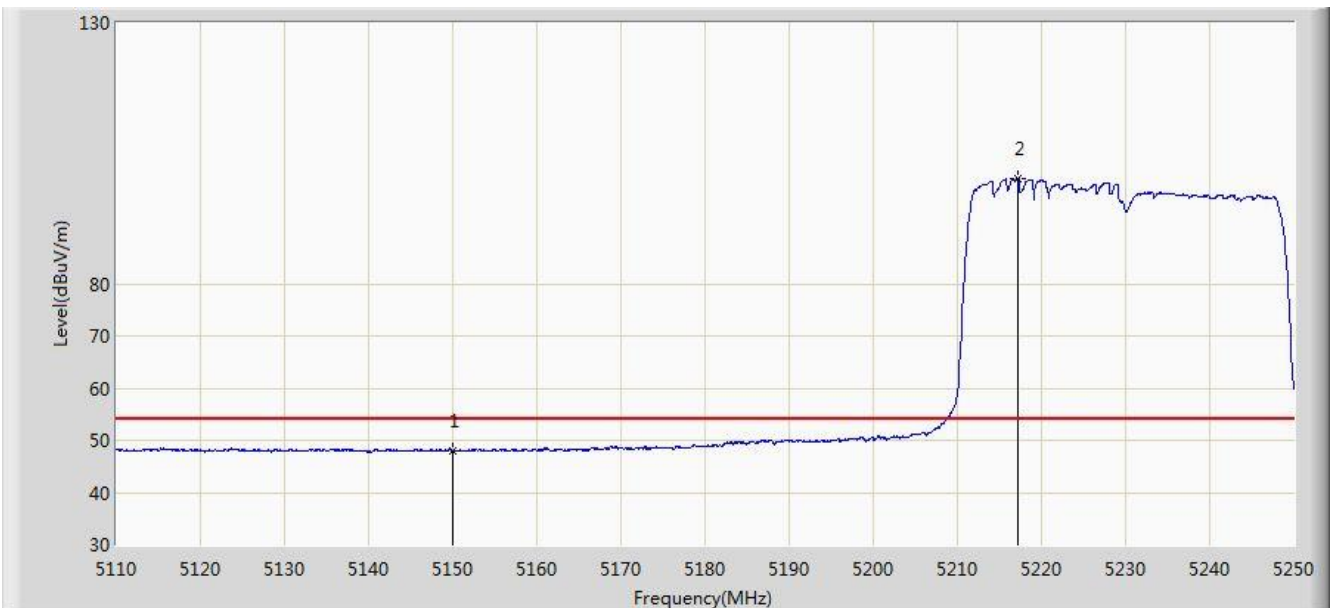


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.892	43.723	-6.108	54.000	4.170	AV
2		*	5217.240	100.055	96.108	N/A	N/A	3.947	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5510MHz (Beam-Forming Mode)	

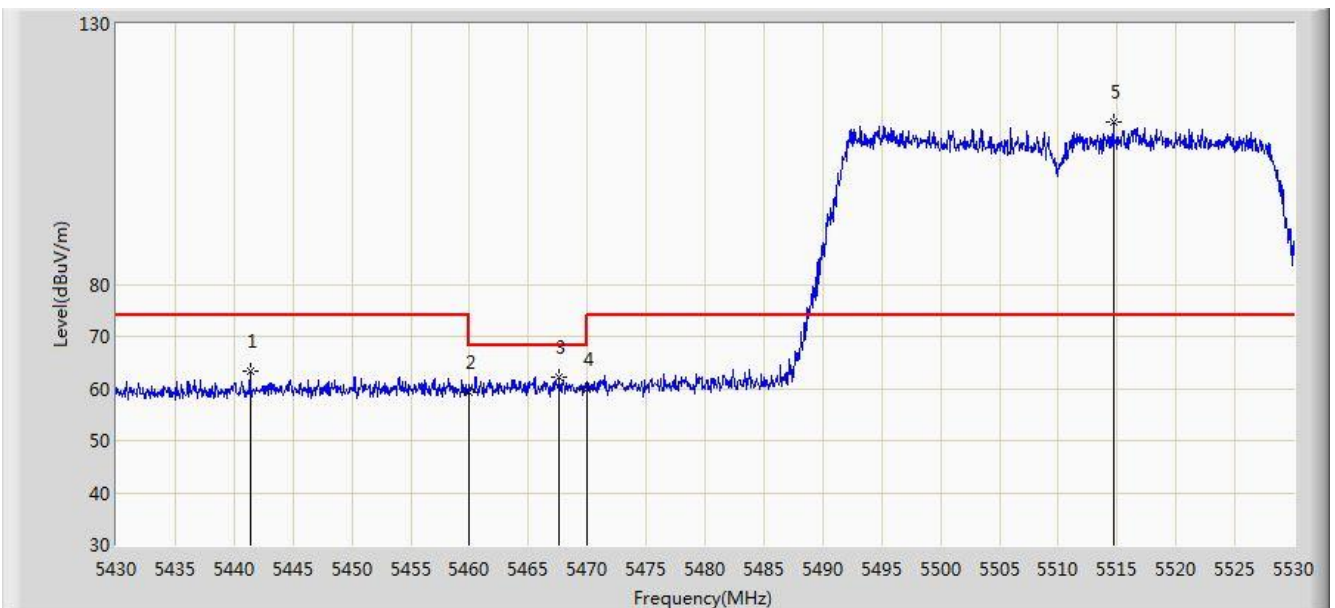


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.350	63.239	59.111	-10.761	74.000	4.128	PK
2			5460.000	59.285	55.105	-14.715	74.000	4.180	PK
3			5467.600	62.168	57.971	-6.032	68.200	4.197	PK
4			5470.000	59.902	55.700	-8.298	68.200	4.202	PK
5		*	5514.650	111.273	106.958	N/A	N/A	4.316	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5510MHz (Beam-Forming Mode)	

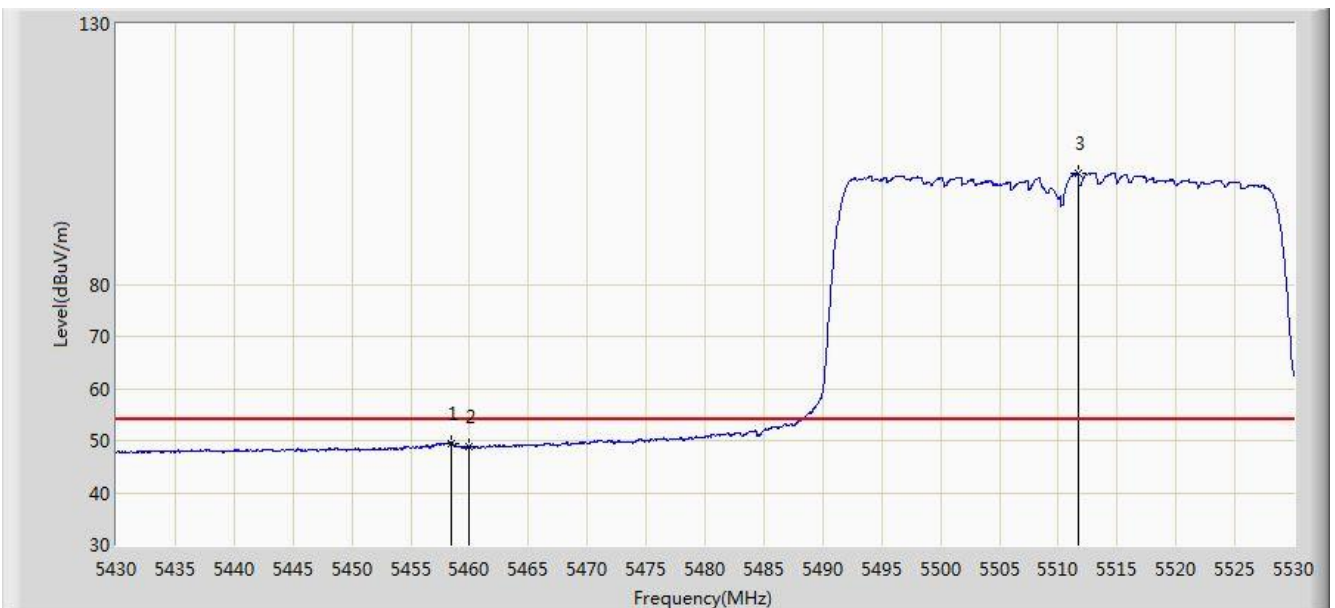


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.400	49.507	45.330	-4.493	54.000	4.177	AV
2			5460.000	48.829	44.649	-5.171	54.000	4.180	AV
3		*	5511.650	101.325	97.019	N/A	N/A	4.306	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5510MHz (Beam-Forming Mode)	

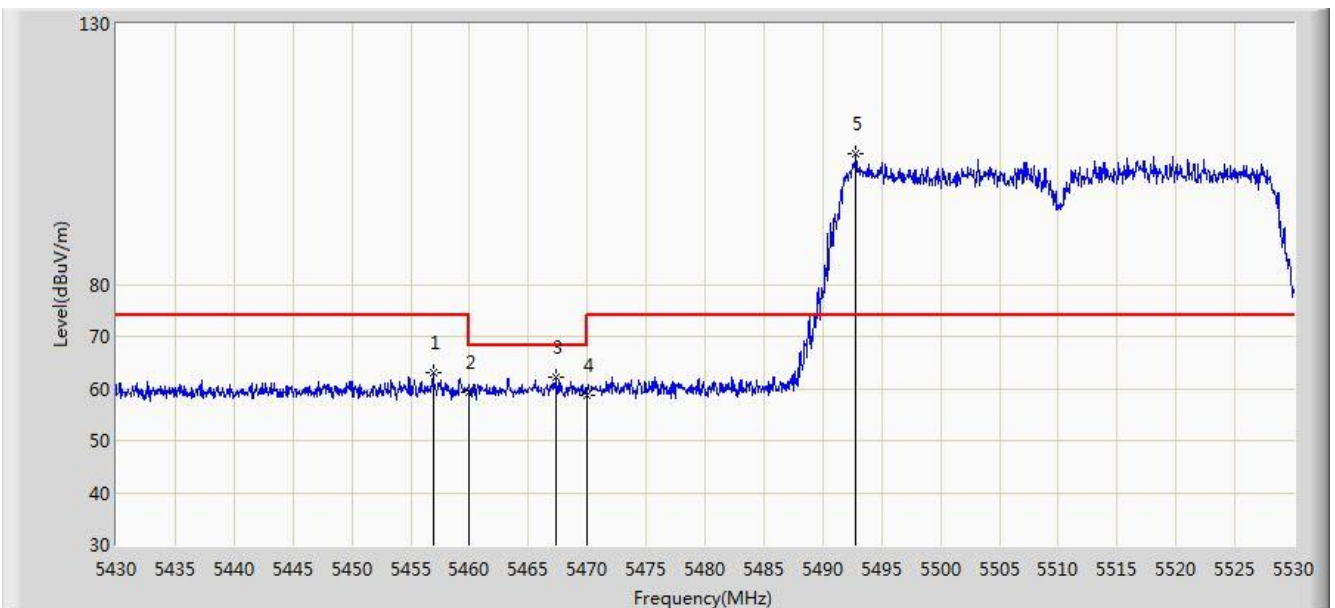


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.950	63.009	58.835	-10.991	74.000	4.173	PK
2			5460.000	59.308	55.128	-14.692	74.000	4.180	PK
3			5467.350	62.167	57.971	-6.033	68.200	4.196	PK
4			5470.000	58.820	54.618	-9.380	68.200	4.202	PK
5		*	5492.800	105.119	100.865	N/A	N/A	4.254	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5510MHz (Beam-Forming Mode)	

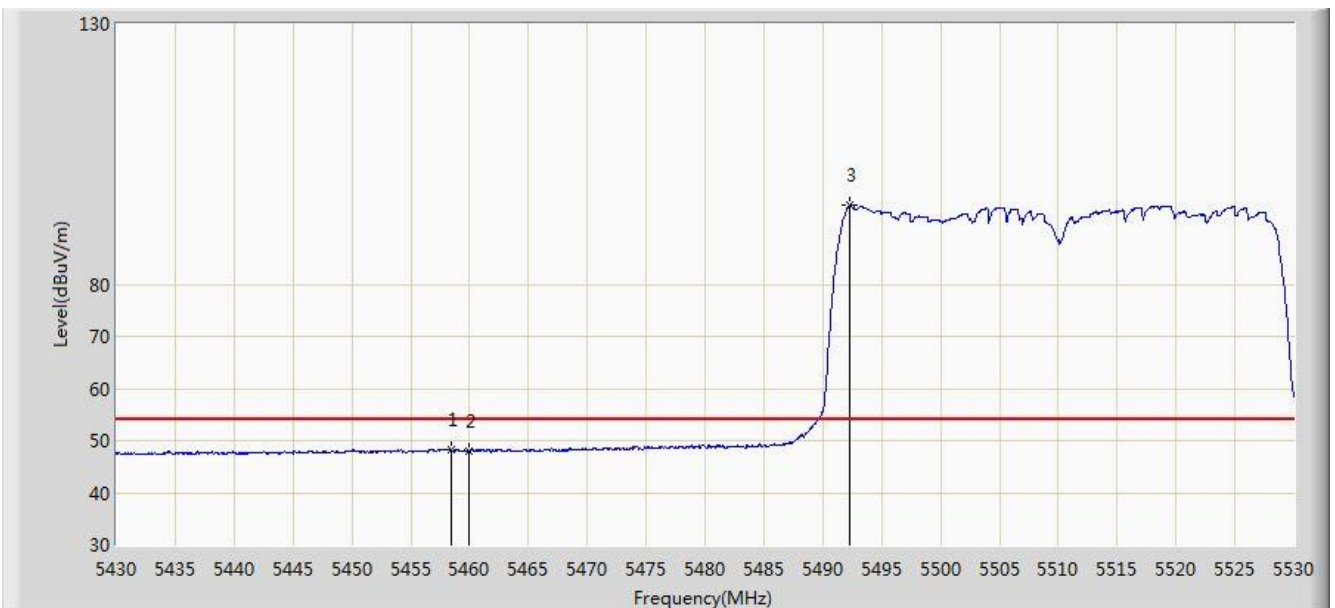


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.400	48.206	44.029	-5.794	54.000	4.177	AV
2			5460.000	48.010	43.830	-5.990	54.000	4.180	AV
3		*	5492.300	95.134	90.881	N/A	N/A	4.253	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5755MHz (Beam-Forming Mode)	

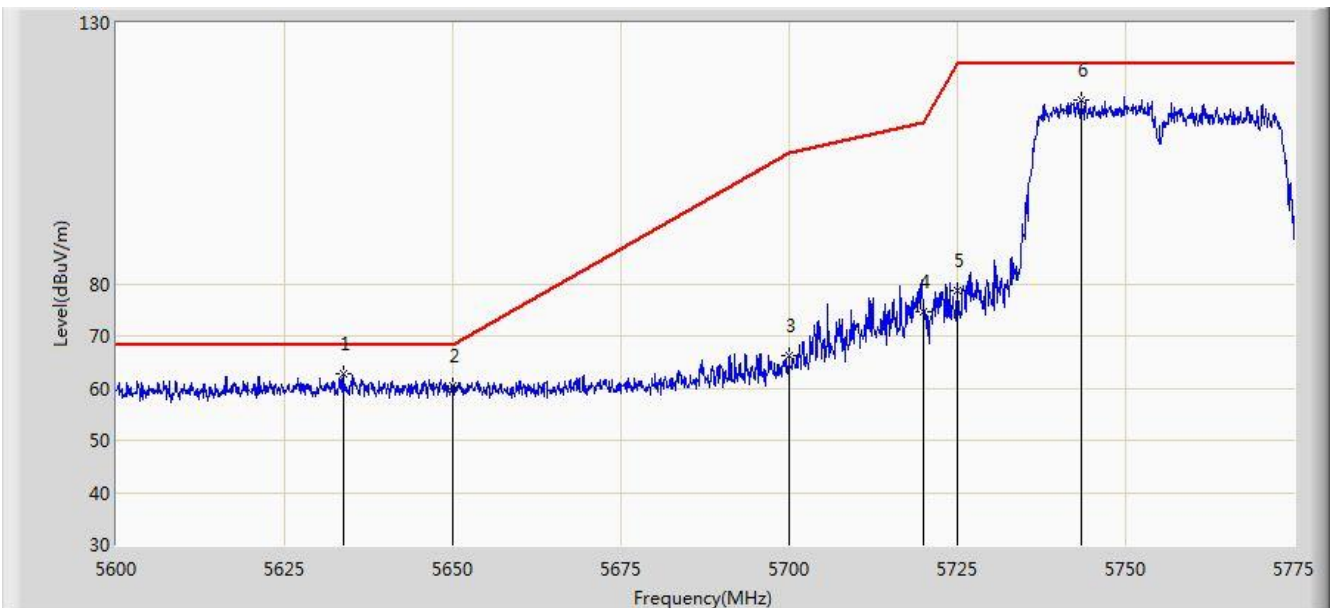


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.687	62.698	58.078	-5.502	68.200	4.620	PK
2			5650.000	60.297	55.626	-7.903	68.200	4.671	PK
3			5700.000	66.247	61.369	-38.953	105.200	4.878	PK
4			5720.000	74.686	69.689	-36.114	110.800	4.997	PK
5			5725.000	78.731	73.702	-43.469	122.200	5.029	PK
6			5743.413	115.311	110.165	N/A	N/A	5.145	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5755MHz (Beam-Forming Mode)	

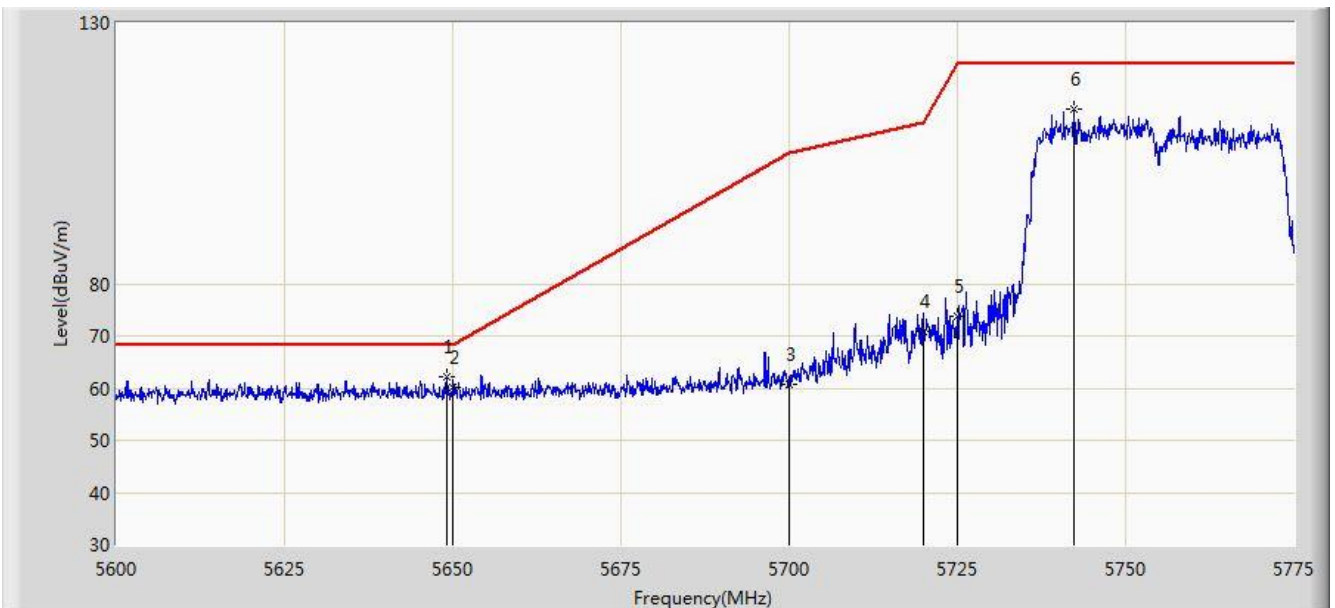


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5649.087	62.161	57.493	-6.039	68.200	4.668	PK
2			5650.000	60.257	55.586	-7.943	68.200	4.671	PK
3			5700.000	60.805	55.927	-44.395	105.200	4.878	PK
4			5720.000	70.901	65.904	-39.899	110.800	4.997	PK
5			5725.000	73.890	68.861	-48.310	122.200	5.029	PK
6			5742.275	113.428	108.289	N/A	N/A	5.139	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5795MHz (Beam-Forming Mode)	

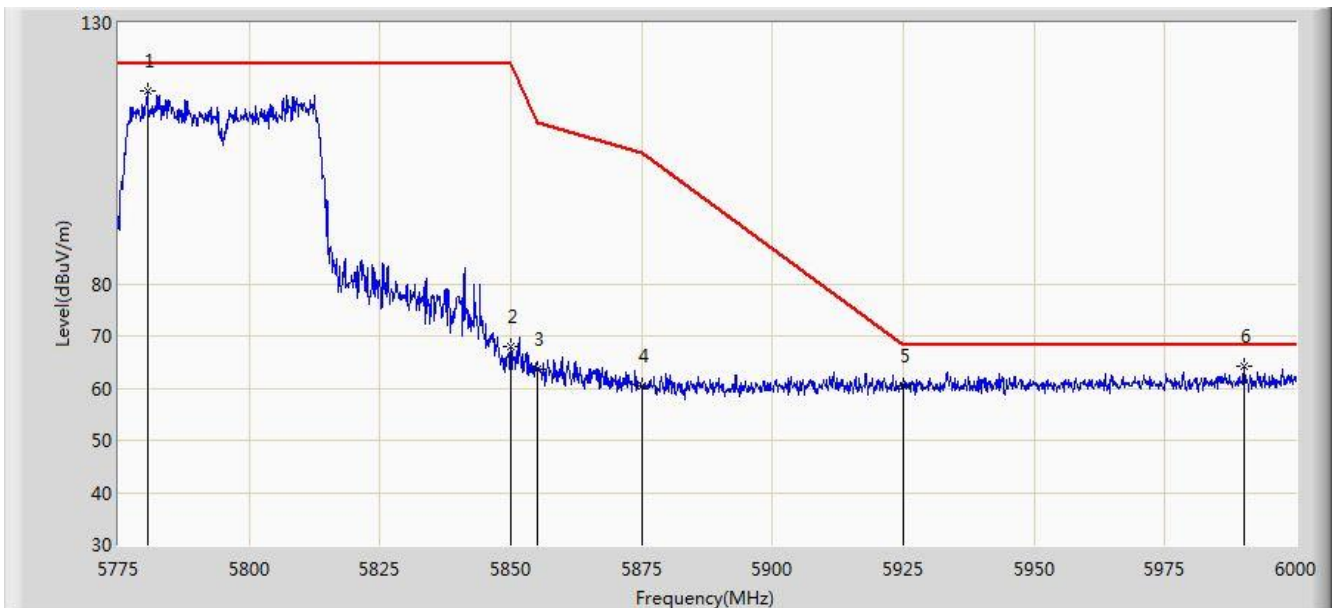


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5780.513	116.917	111.573	N/A	N/A	5.344	PK
2			5850.000	67.831	62.105	-54.369	122.200	5.726	PK
3			5855.000	63.610	57.864	-47.190	110.800	5.746	PK
4			5875.000	60.430	54.610	-44.770	105.200	5.820	PK
5			5925.000	60.576	54.610	-7.624	68.200	5.967	PK
6		*	5990.100	64.124	58.030	-4.076	68.200	6.094	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT40 at Channel 5795MHz (Beam-Forming Mode)	

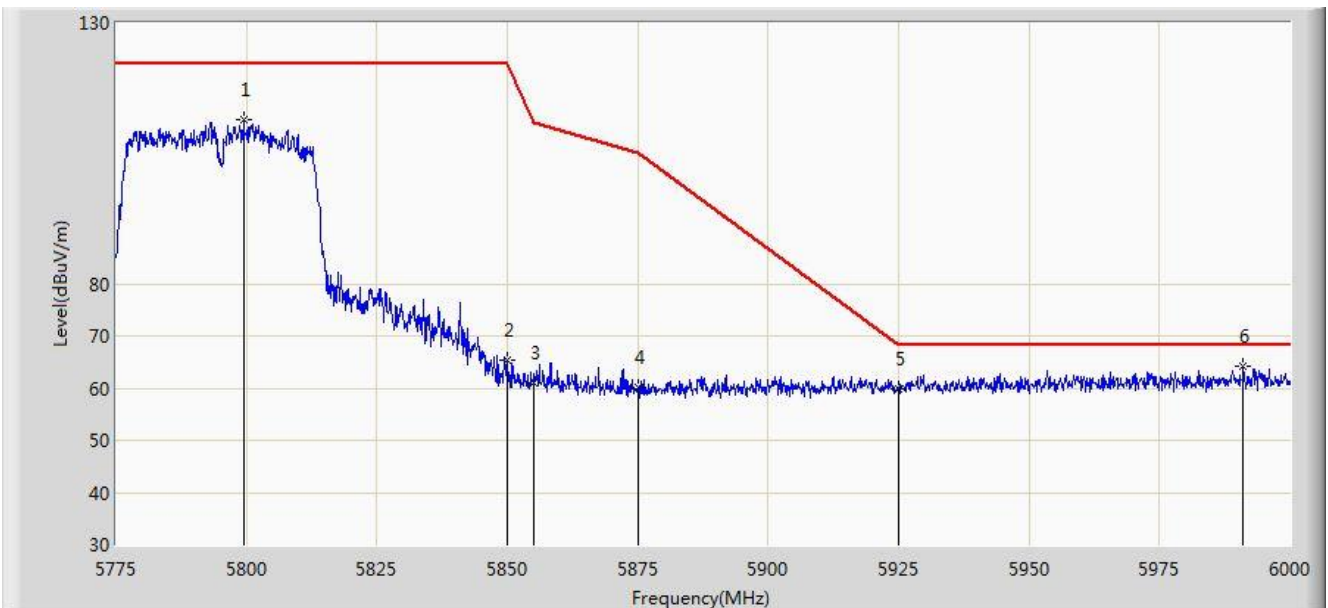


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5799.525	111.518	106.076	N/A	N/A	5.443	PK
2			5850.000	65.301	59.575	-56.899	122.200	5.726	PK
3			5855.000	60.872	55.126	-49.928	110.800	5.746	PK
4			5875.000	60.042	54.222	-45.158	105.200	5.820	PK
5			5925.000	59.968	54.002	-8.232	68.200	5.967	PK
6		*	5991.112	64.189	58.093	-4.011	68.200	6.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5210MHz (Beam-Forming Mode)	

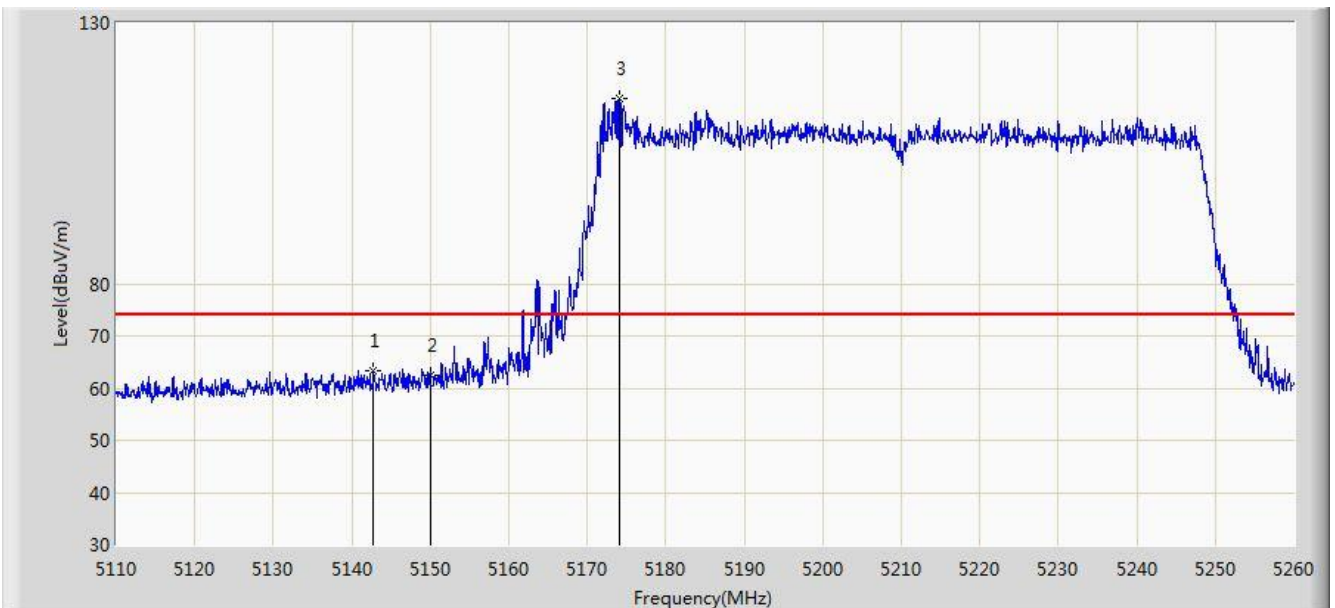


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.700	63.455	59.279	-10.545	74.000	4.176	PK
2			5150.000	62.531	58.362	-11.469	74.000	4.170	PK
3		*	5174.050	115.366	111.276	N/A	N/A	4.090	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5210MHz (Beam-Forming Mode)	

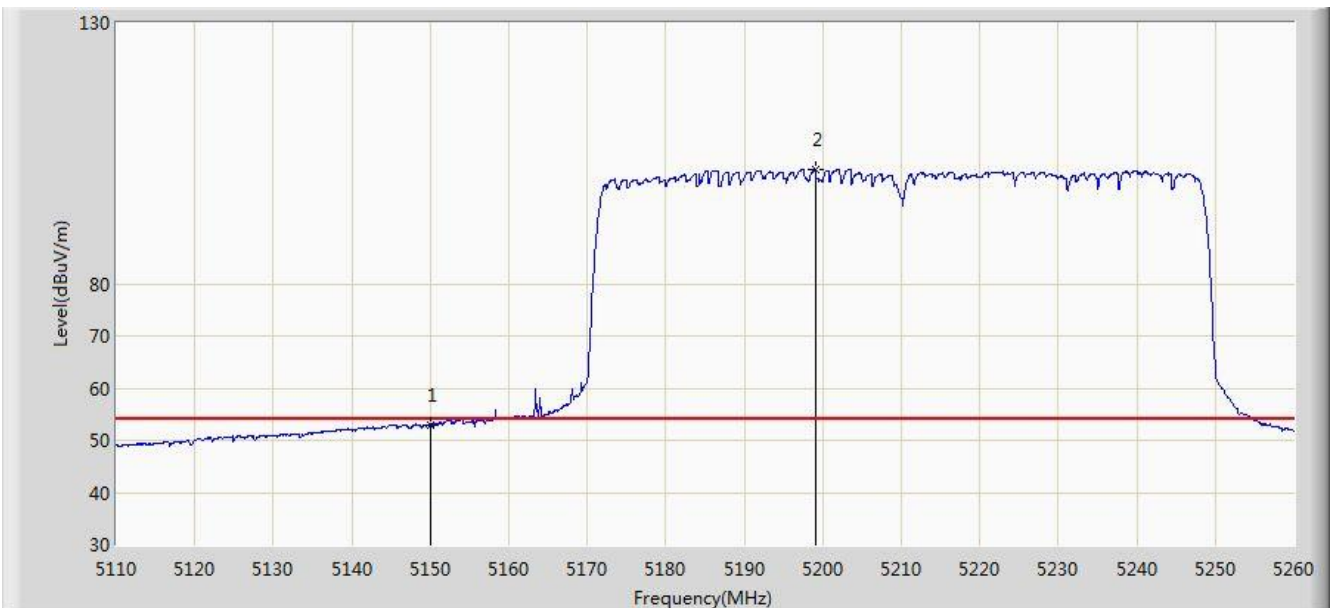


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.967	48.798	-1.033	54.000	4.170	AV
2		*	5199.025	101.984	97.983	N/A	N/A	4.002	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5210MHz (Beam-Forming Mode)	

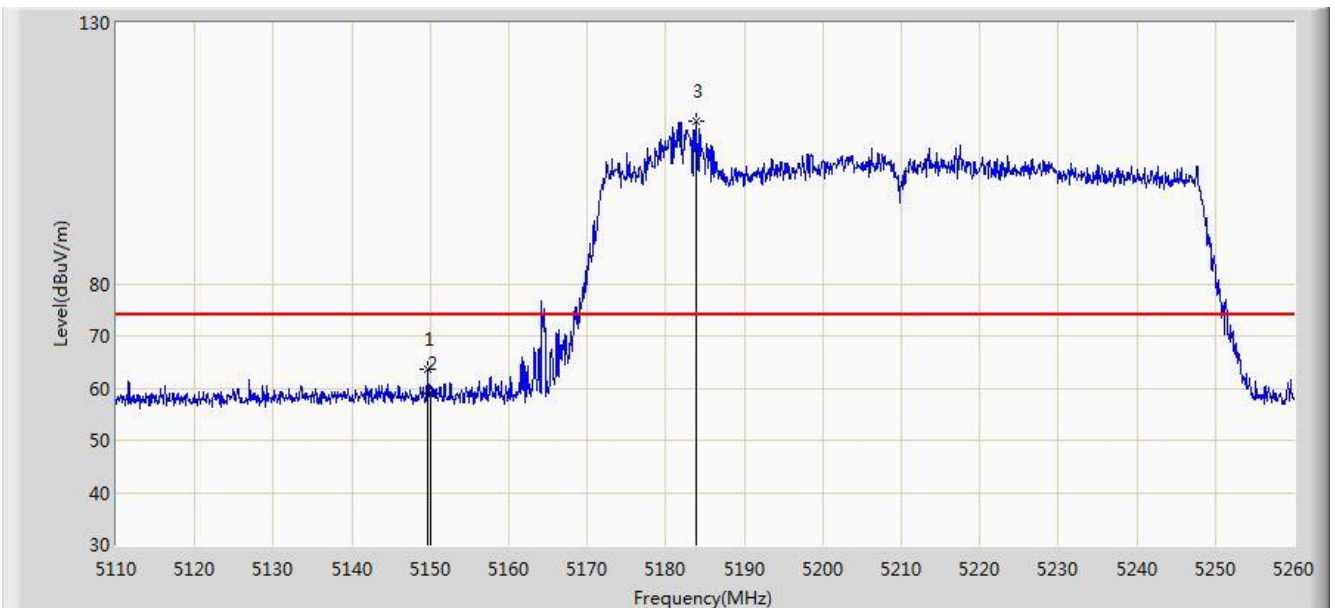


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.675	63.517	59.347	-10.483	74.000	4.170	PK
2			5150.000	59.056	54.887	-14.944	74.000	4.170	PK
3		*	5183.875	111.186	107.131	N/A	N/A	4.056	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5210MHz (Beam-Forming Mode)	

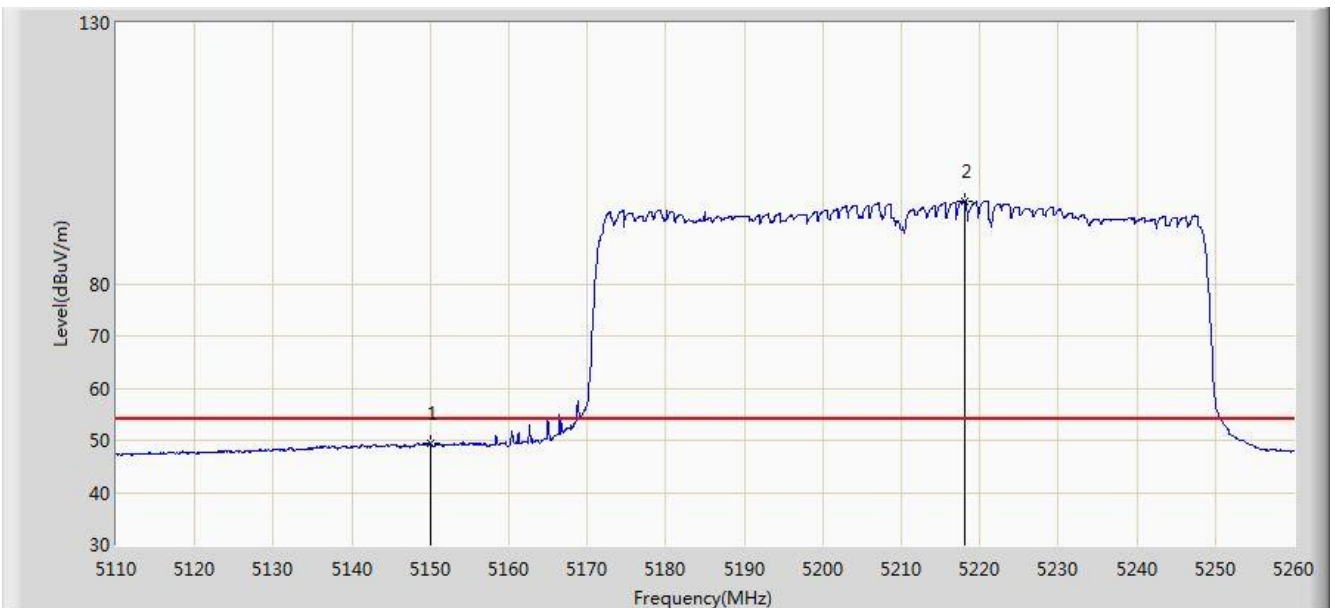


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.343	45.174	-4.657	54.000	4.170	AV
2		*	5218.150	95.726	91.782	N/A	N/A	3.944	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5290MHz (Beam-Forming Mode)	

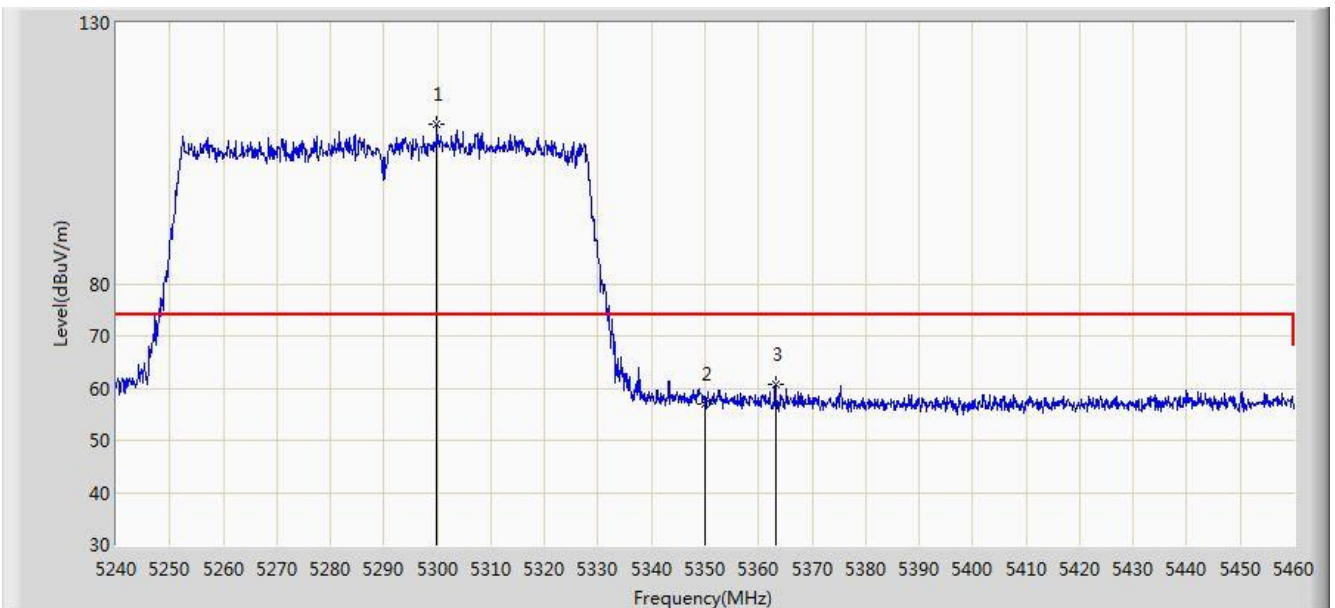


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.950	110.588	106.775	N/A	N/A	3.814	PK
2			5350.000	57.019	53.114	-16.981	74.000	3.904	PK
3			5363.200	60.807	56.878	-13.193	74.000	3.928	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5290MHz (Beam-Forming Mode)	

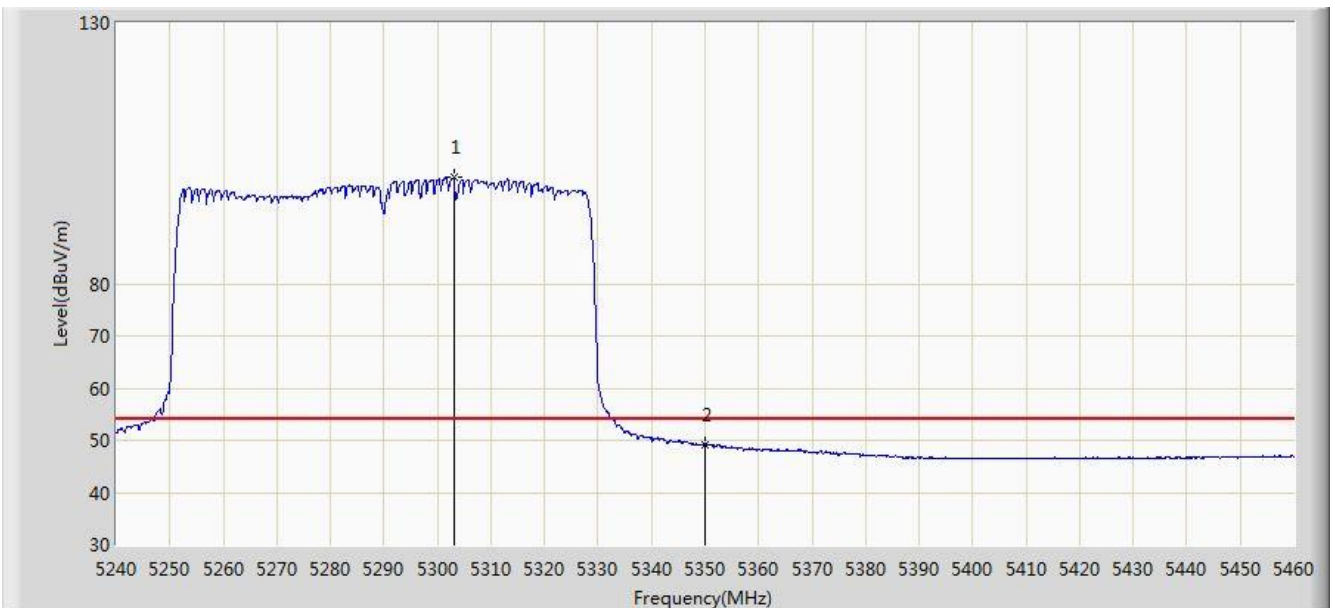


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.140	100.380	96.563	N/A	N/A	3.817	AV
2			5350.000	49.240	45.335	-4.760	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5290MHz (Beam-Forming Mode)	

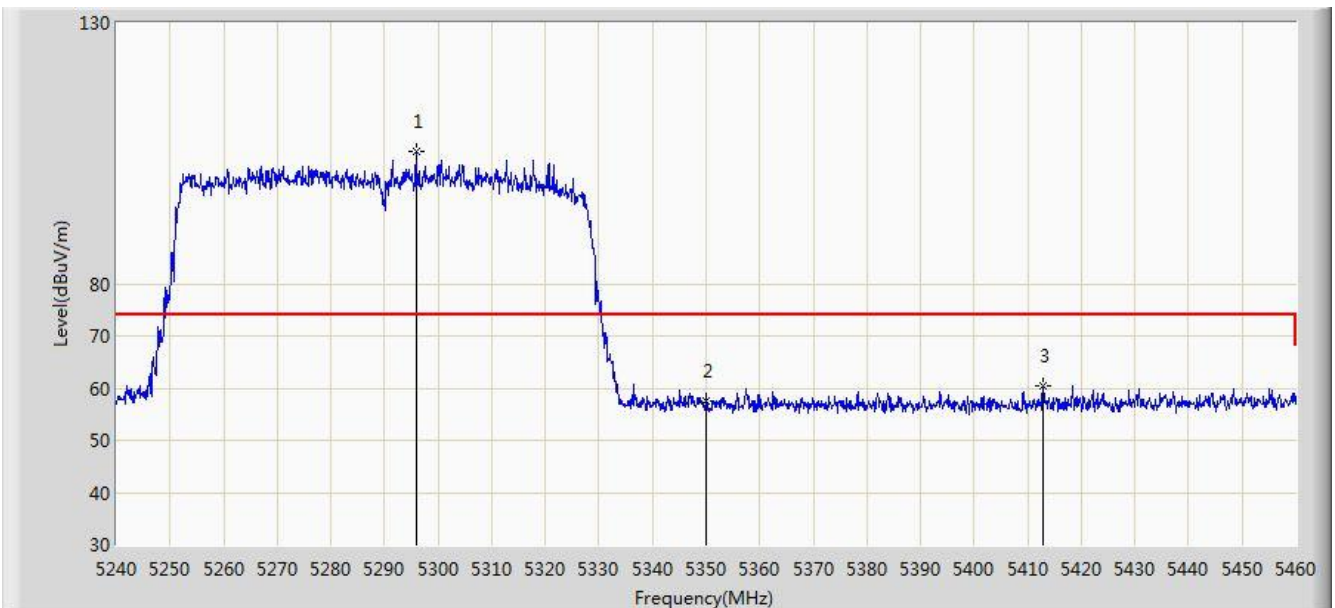


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.990	105.336	101.520	N/A	N/A	3.816	PK
2			5350.000	57.561	53.656	-16.439	74.000	3.904	PK
3			5412.810	60.326	56.289	-13.674	74.000	4.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5290MHz (Beam-Forming Mode)	

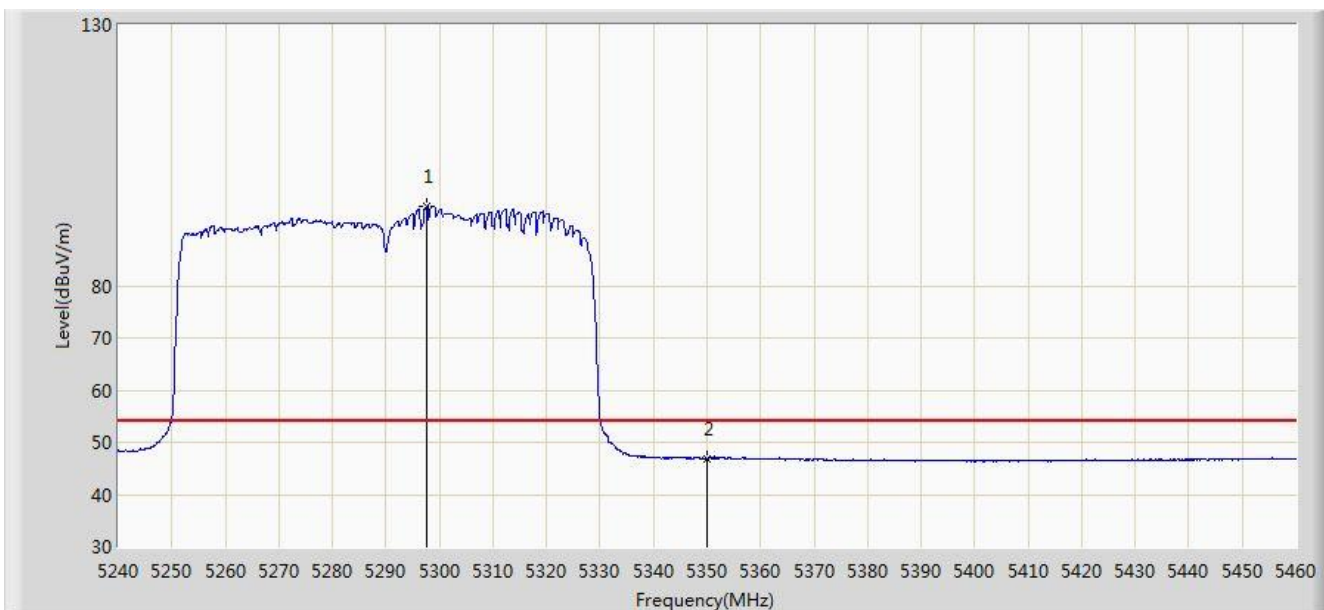


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.530	95.170	91.355	N/A	N/A	3.815	AV
2			5350.000	46.913	43.008	-7.087	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5530MHz (Beam-Forming Mode)	

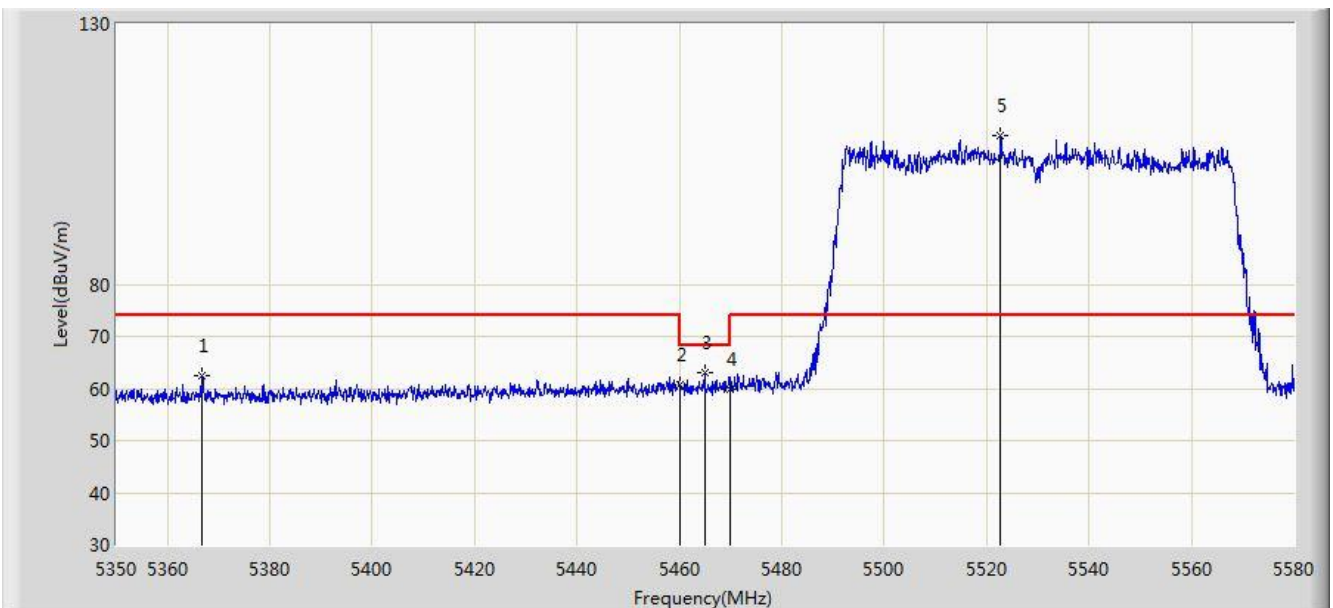


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5366.790	62.544	58.609	-11.456	74.000	3.935	PK
2			5460.000	60.627	56.447	-13.373	74.000	4.180	PK
3			5464.885	62.909	58.718	-5.291	68.200	4.191	PK
4			5470.000	59.731	55.529	-8.469	68.200	4.202	PK
5		*	5522.730	108.438	104.099	N/A	N/A	4.339	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5530MHz (Beam-Forming Mode)	

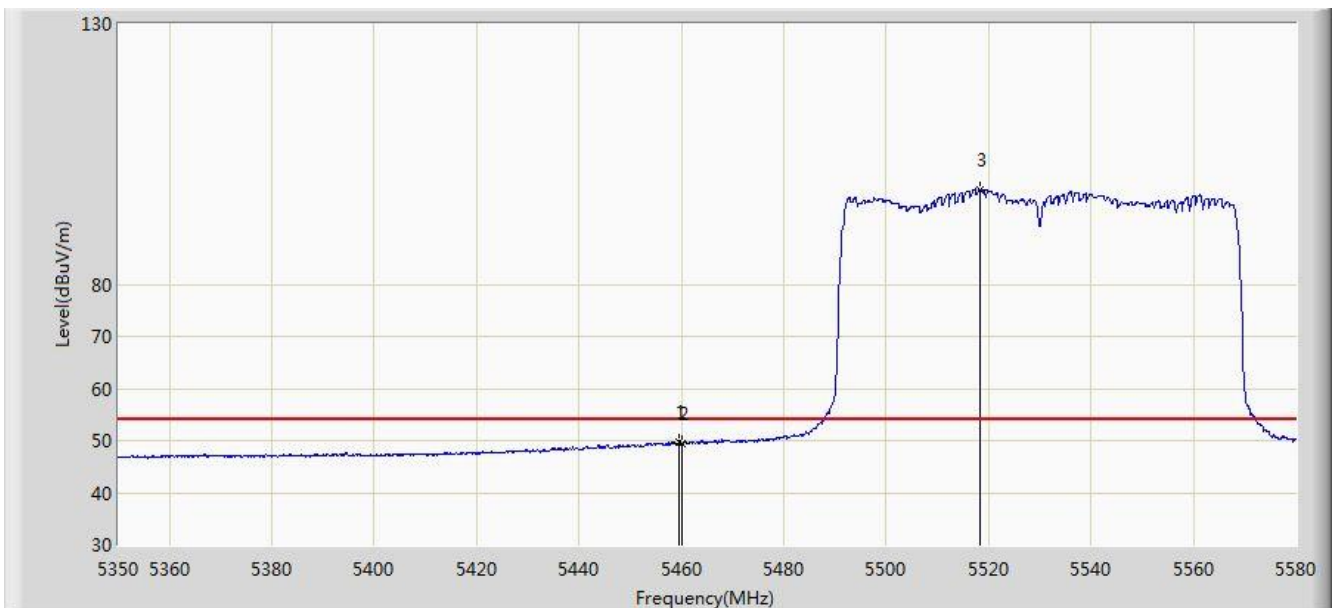


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.595	49.731	45.552	-4.269	54.000	4.180	AV
2			5460.000	49.495	45.315	-4.505	54.000	4.180	AV
3		*	5518.360	98.249	93.923	N/A	N/A	4.326	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5530MHz (Beam-Forming Mode)	

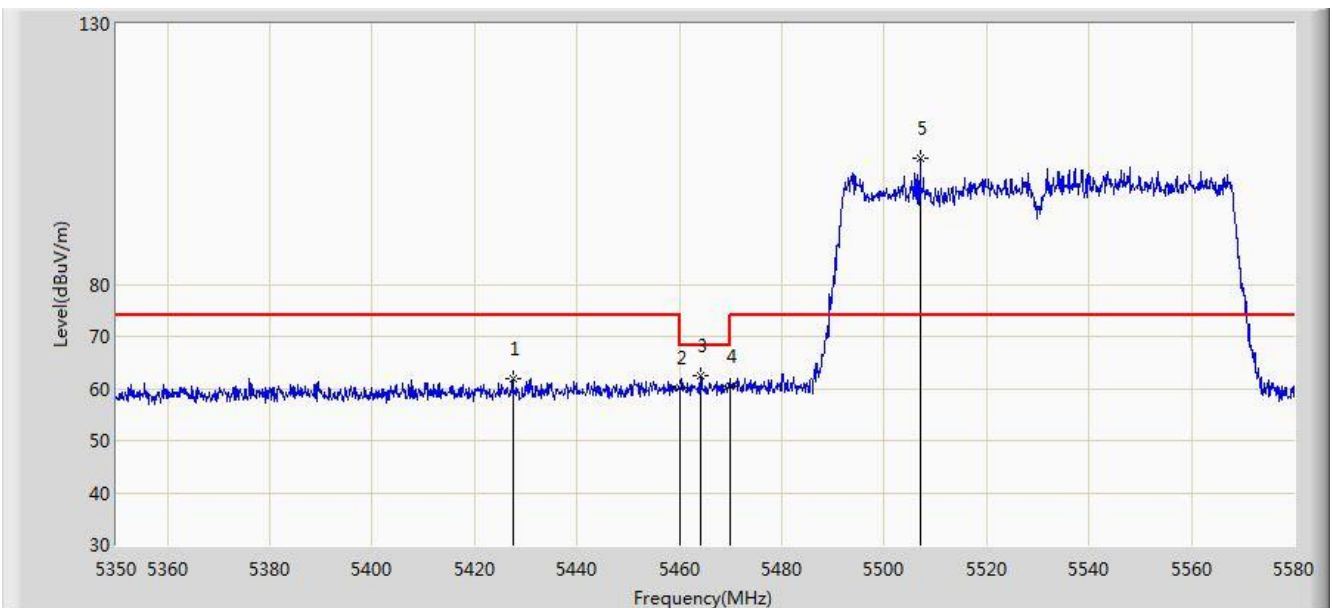


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5427.395	61.780	57.695	-12.220	74.000	4.085	PK
2			5460.000	60.083	55.903	-13.917	74.000	4.180	PK
3			5464.195	62.513	58.324	-5.687	68.200	4.189	PK
4			5470.000	60.553	56.351	-7.647	68.200	4.202	PK
5		*	5507.090	104.086	99.793	N/A	N/A	4.292	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5530MHz (Beam-Forming Mode)	

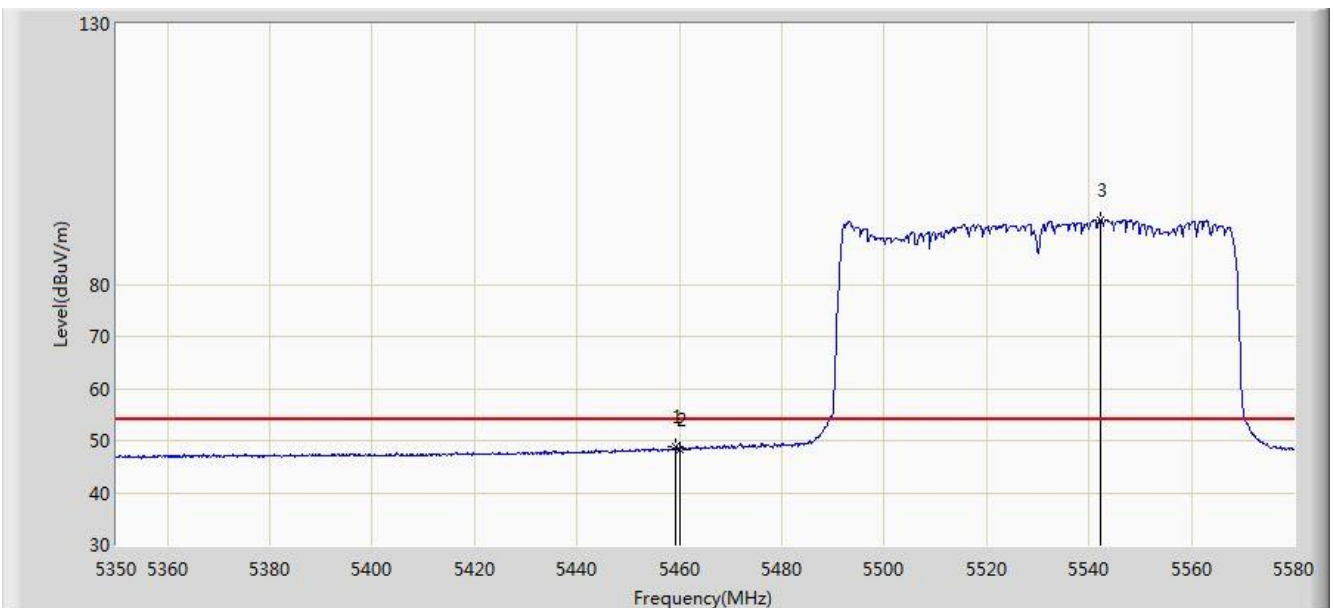


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.250	48.781	44.602	-5.219	54.000	4.178	AV
2			5460.000	48.267	44.087	-5.733	54.000	4.180	AV
3		*	5542.280	92.268	87.871	N/A	N/A	4.398	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5610MHz (Beam-Forming Mode)	

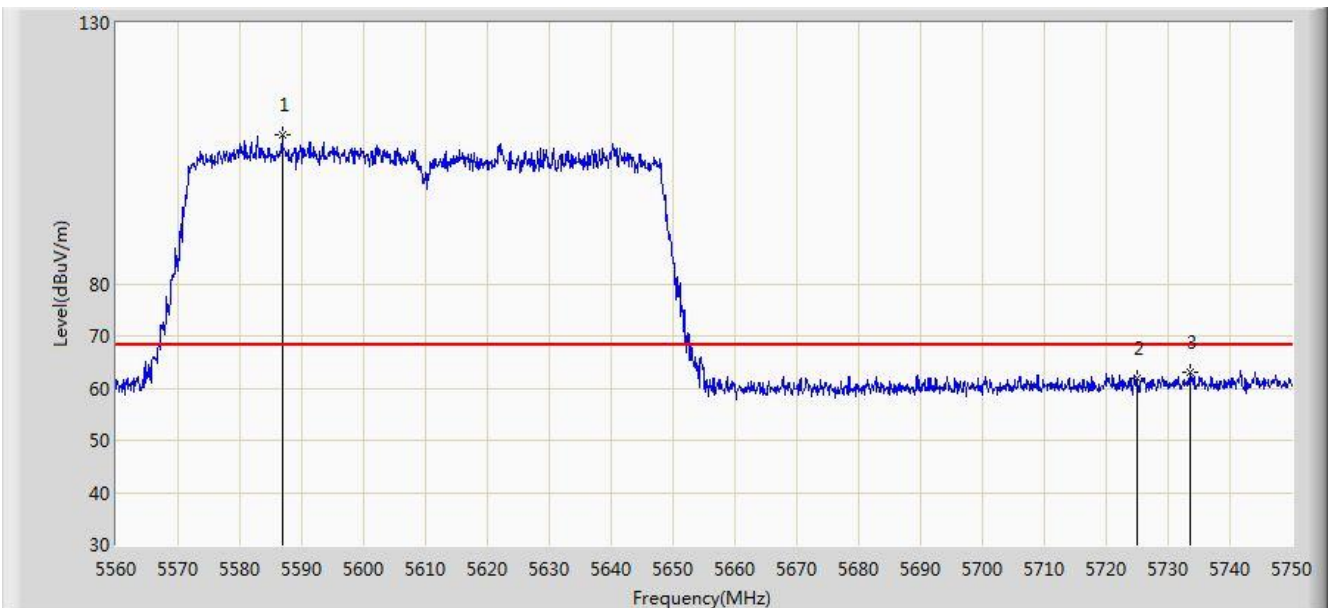


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5586.790	108.537	104.040	N/A	N/A	4.497	PK
2			5725.000	61.762	56.733	-6.438	68.200	5.029	PK
3			5733.565	63.105	58.021	-5.095	68.200	5.083	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5610MHz (Beam-Forming Mode)	

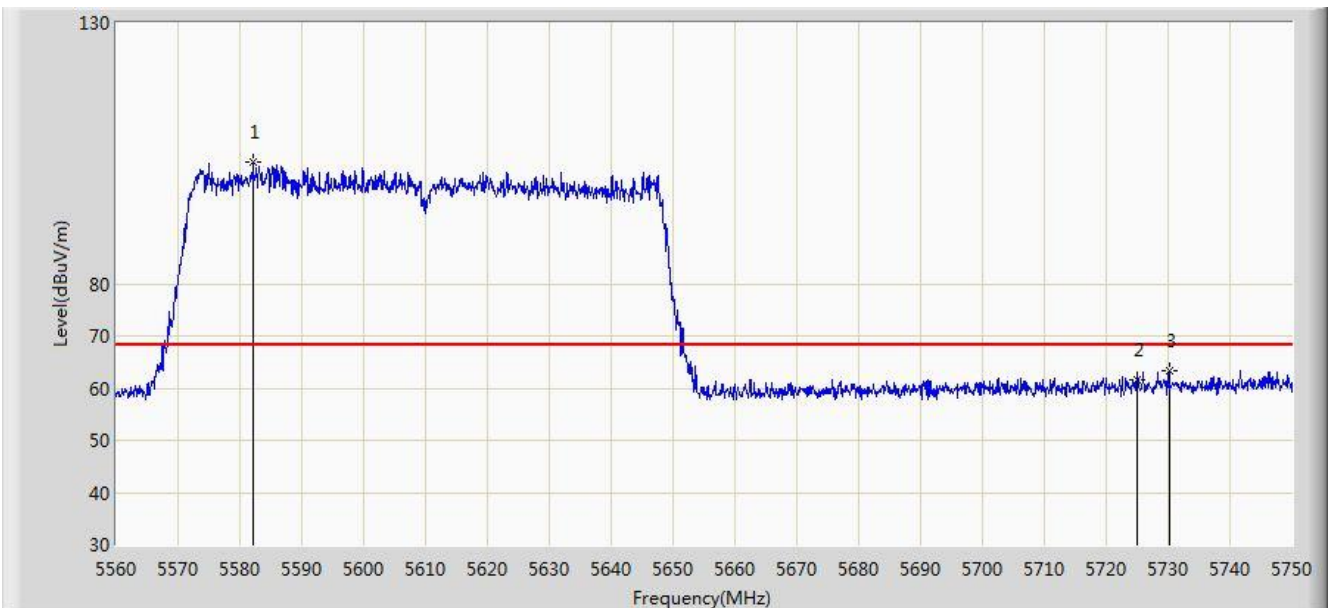


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5582.135	103.465	98.978	N/A	N/A	4.487	PK
2			5725.000	61.534	56.505	-6.666	68.200	5.029	PK
3			5730.145	63.231	58.169	-4.969	68.200	5.062	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5775MHz (Beam-Forming Mode)	

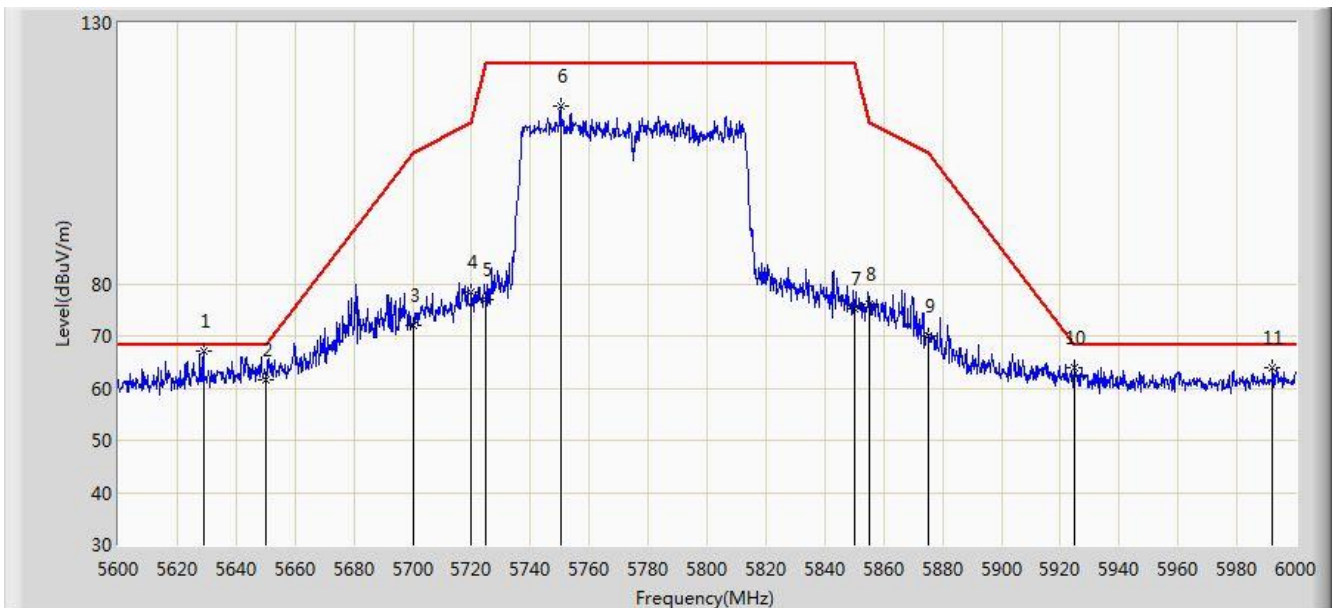


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.000	67.089	62.483	-1.111	68.200	4.607	PK
2			5650.000	61.587	56.916	-6.613	68.200	4.671	PK
3			5700.000	72.153	67.275	-33.047	105.200	4.878	PK
4			5720.000	78.410	73.413	-32.390	110.800	4.997	PK
5			5725.000	77.063	72.034	-45.137	122.200	5.029	PK
6			5750.200	113.989	108.805	N/A	N/A	5.184	PK
7			5850.000	75.289	69.563	-46.911	122.200	5.726	PK
8			5855.000	76.086	70.340	-34.714	110.800	5.746	PK
9			5875.000	69.872	64.052	-35.328	105.200	5.820	PK
10			5925.000	63.897	57.931	-4.303	68.200	5.967	PK
11			5992.200	64.002	57.904	-4.198	68.200	6.097	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT80 at Channel 5775MHz (Beam-Forming Mode)	

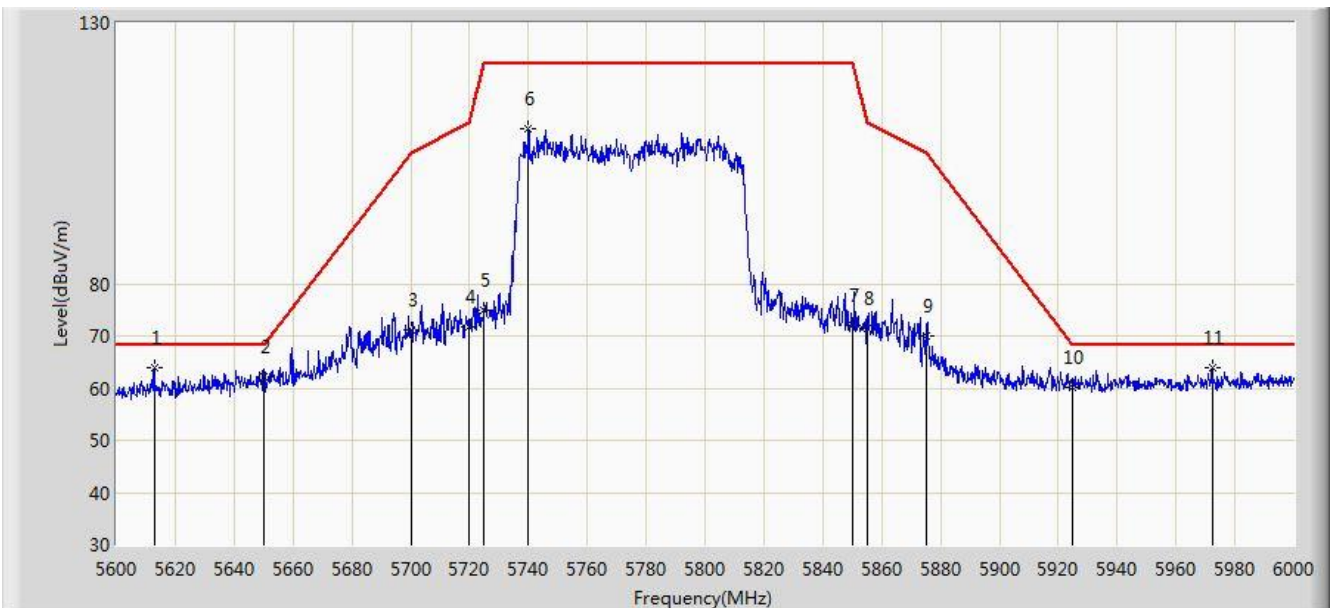


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5612.800	63.854	59.294	-4.346	68.200	4.560	PK
2			5650.000	62.223	57.552	-5.977	68.200	4.671	PK
3			5700.000	71.141	66.263	-34.059	105.200	4.878	PK
4			5720.000	71.771	66.774	-39.029	110.800	4.997	PK
5			5725.000	74.836	69.807	-47.364	122.200	5.029	PK
6			5740.000	109.842	104.717	N/A	N/A	5.125	PK
7			5850.000	71.927	66.201	-50.273	122.200	5.726	PK
8			5855.000	71.579	65.833	-39.221	110.800	5.746	PK
9			5875.000	69.906	64.086	-35.294	105.200	5.820	PK
10			5925.000	60.087	54.121	-8.113	68.200	5.967	PK
11			5972.200	63.785	57.720	-4.415	68.200	6.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5250MHz (Beam-Forming Mode)	

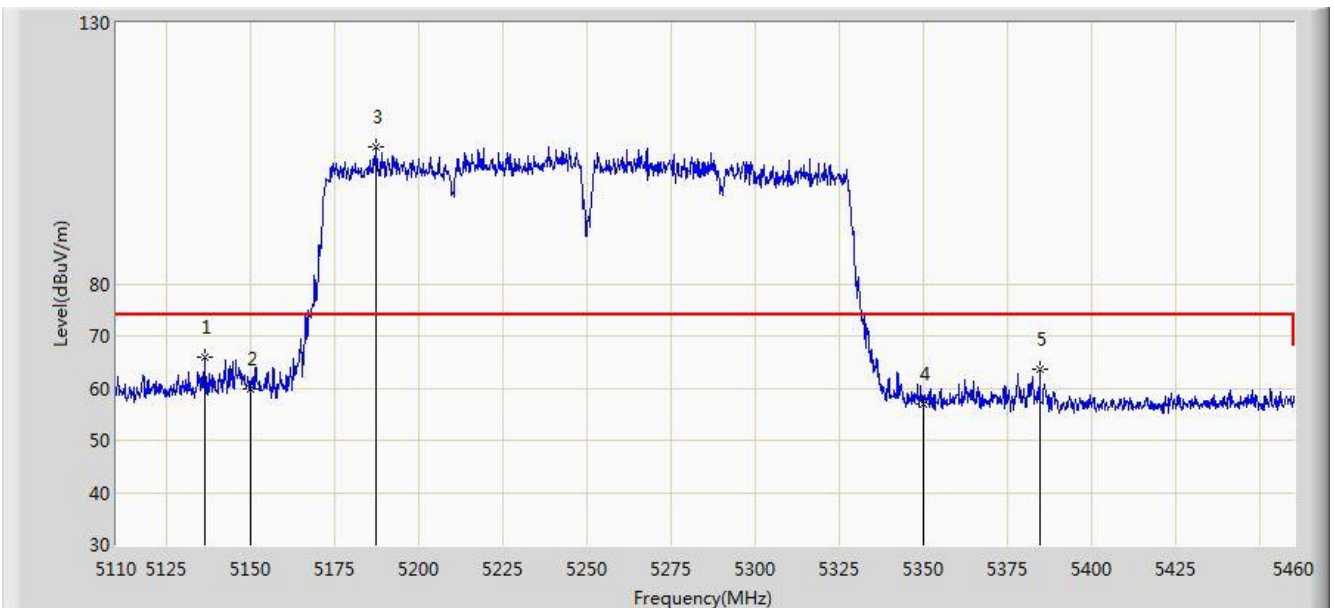


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.250	65.905	61.730	-8.095	74.000	4.175	PK
2			5150.000	59.896	55.727	-14.104	74.000	4.170	PK
3		*	5187.350	106.247	102.204	N/A	N/A	4.043	PK
4			5350.000	56.904	52.999	-17.096	74.000	3.904	PK
5			5384.575	63.604	59.636	-10.396	74.000	3.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5250MHz (Beam-Forming Mode)	

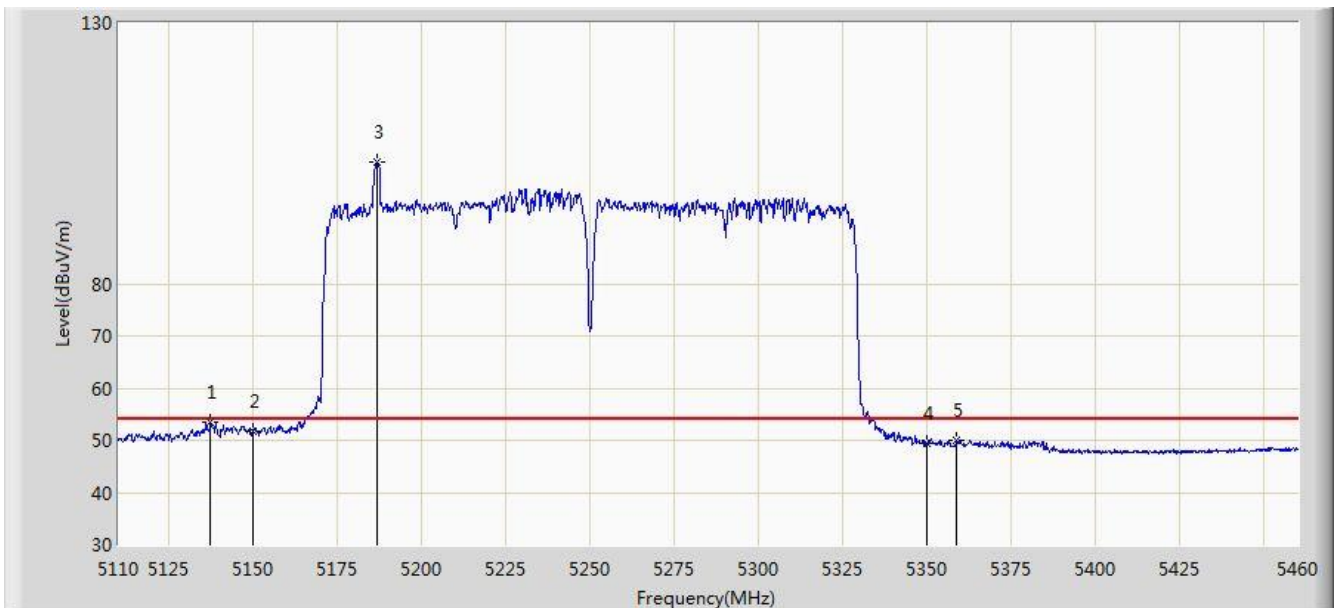


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.300	53.564	49.389	-0.436	54.000	4.175	AV
2			5150.000	51.667	47.498	-2.333	54.000	4.170	AV
3		*	5186.825	103.338	99.293	N/A	N/A	4.045	AV
4			5350.000	49.317	45.412	-4.683	54.000	3.904	AV
5			5358.675	50.048	46.128	-3.952	54.000	3.921	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5250MHz (Beam-Forming Mode)	

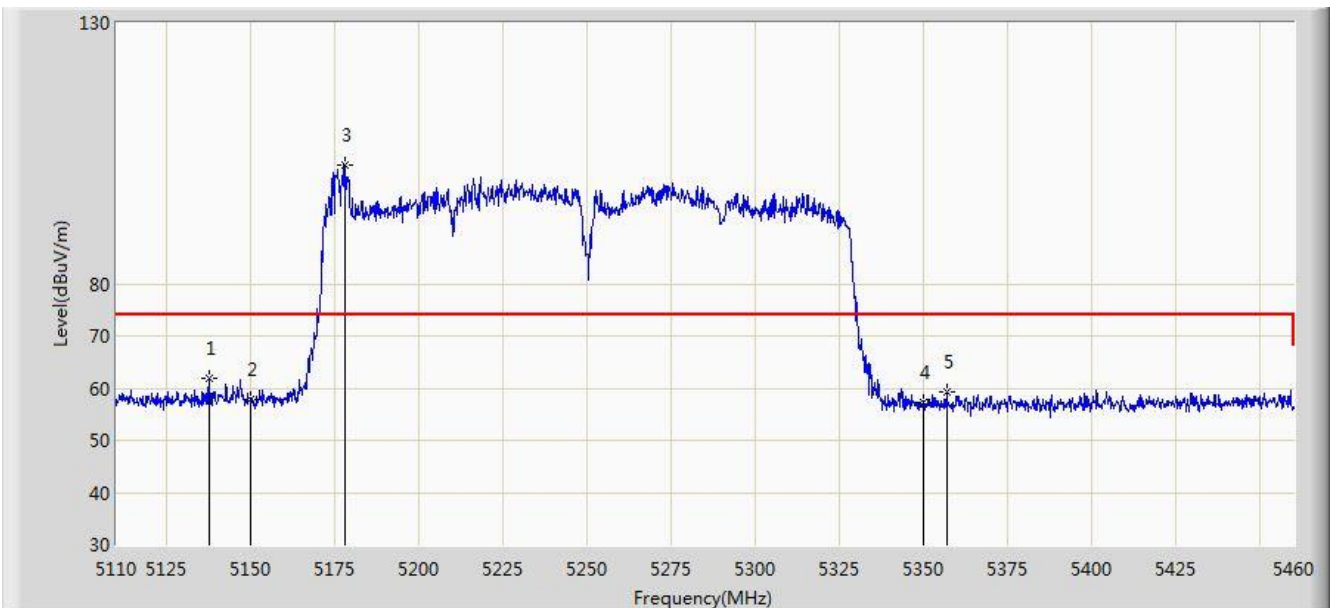


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.650	61.905	57.730	-12.095	74.000	4.175	PK
2			5150.000	57.777	53.608	-16.223	74.000	4.170	PK
3		*	5177.900	102.696	98.620	N/A	N/A	4.077	PK
4			5350.000	57.358	53.453	-16.642	74.000	3.904	PK
5			5356.925	59.215	55.298	-14.785	74.000	3.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5250MHz (Beam-Forming Mode)	

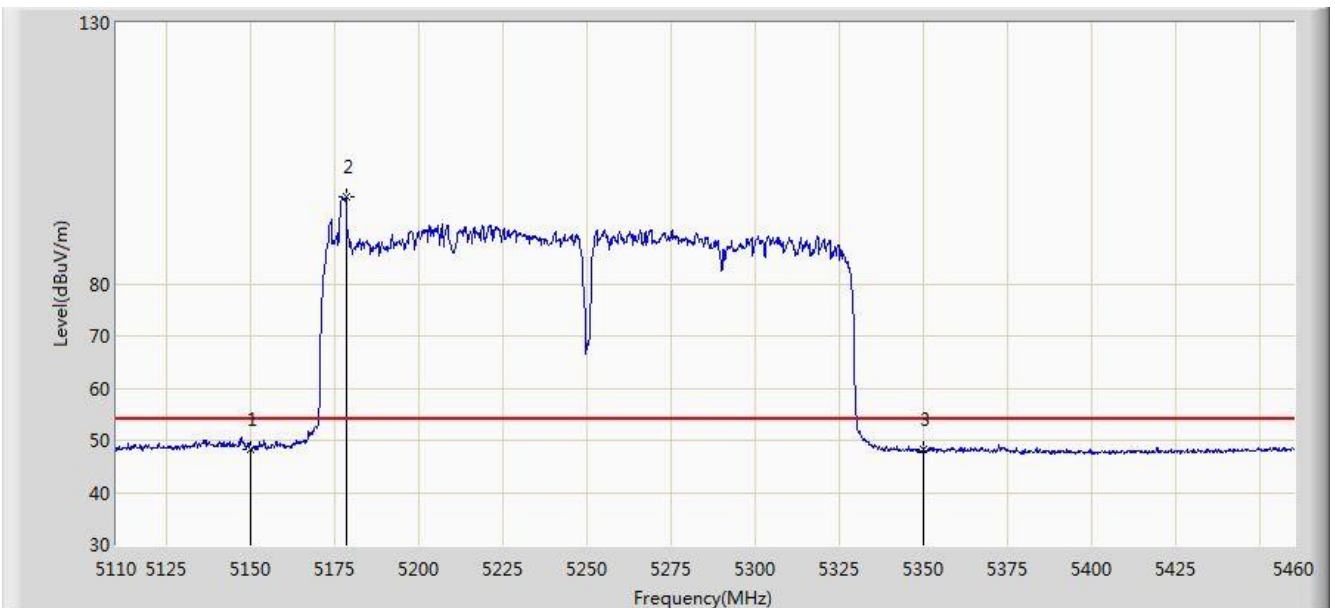


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.302	44.133	-5.698	54.000	4.170	AV
2		*	5178.425	96.808	92.734	N/A	N/A	4.074	AV
3			5350.000	48.335	44.430	-5.665	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5570MHz (Beam-Forming Mode)	

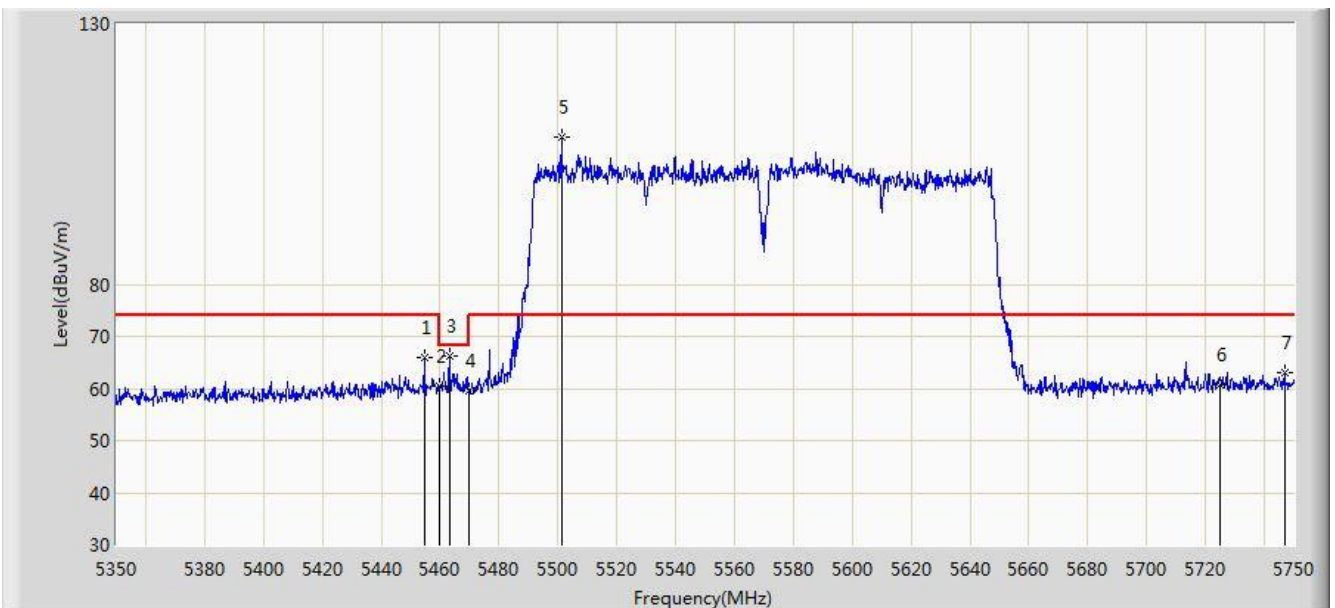


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.800	66.002	61.833	-7.998	74.000	4.170	PK
2			5460.000	60.335	56.155	-13.665	74.000	4.180	PK
3			5463.200	66.359	62.172	-1.841	68.200	4.187	PK
4			5470.000	59.541	55.339	-8.659	68.200	4.202	PK
5		*	5501.200	108.394	104.118	N/A	N/A	4.275	PK
6			5725.000	60.783	55.754	-13.217	74.000	5.029	PK
7			5746.800	62.943	57.778	-11.057	74.000	5.165	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5570MHz (Beam-Forming Mode)	

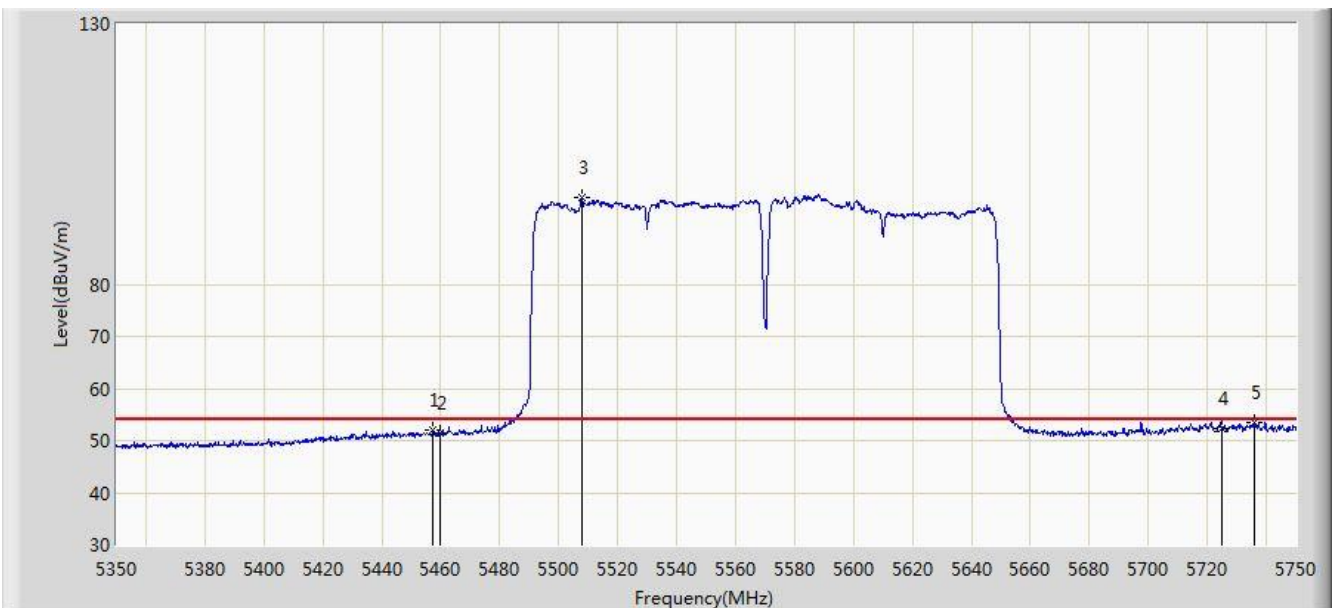


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.400	51.926	47.751	-2.074	54.000	4.175	AV
2			5460.000	51.455	47.275	-2.545	54.000	4.180	AV
3		*	5507.800	96.616	92.321	N/A	N/A	4.295	AV
4			5725.000	52.203	47.174	-1.797	54.000	5.029	AV
5			5735.800	53.374	48.276	-0.626	54.000	5.098	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5570MHz (Beam-Forming Mode)	

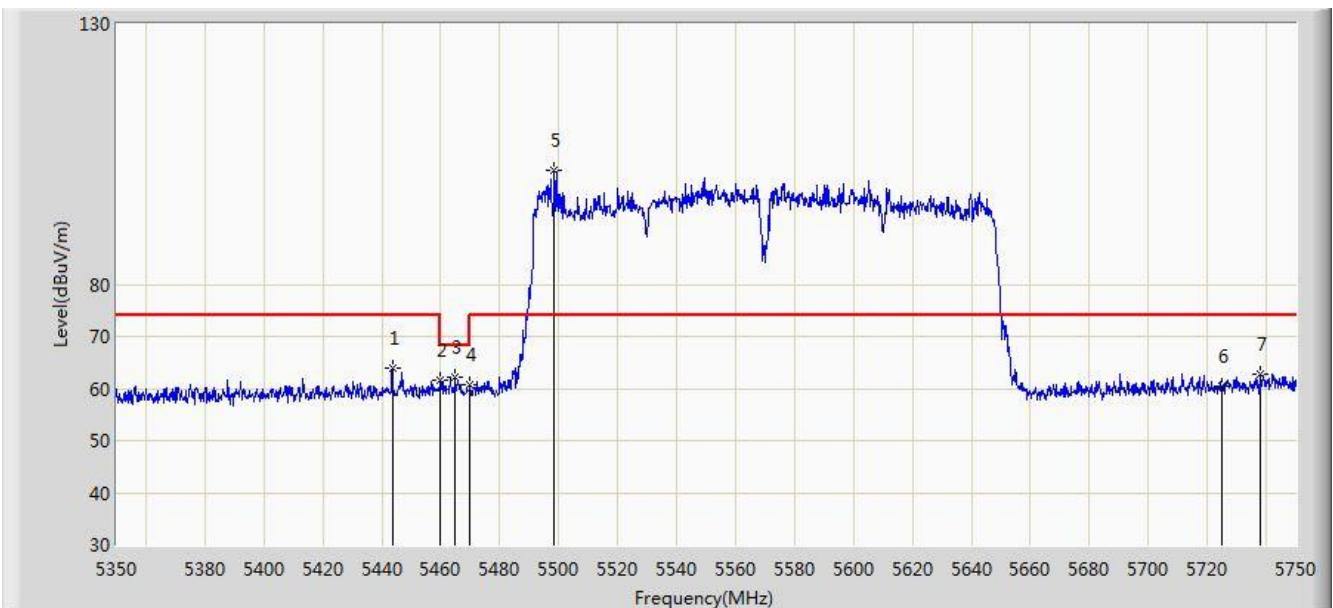


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.600	63.858	59.723	-10.142	74.000	4.135	PK
2			5460.000	61.622	57.442	-12.378	74.000	4.180	PK
3			5465.000	62.232	58.041	-5.968	68.200	4.191	PK
4			5470.000	60.764	56.562	-7.436	68.200	4.202	PK
5		*	5498.600	101.801	97.533	N/A	N/A	4.268	PK
6			5725.000	60.381	55.352	-13.619	74.000	5.029	PK
7			5738.000	62.747	57.635	-11.253	74.000	5.112	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5570MHz (Beam-Forming Mode)	

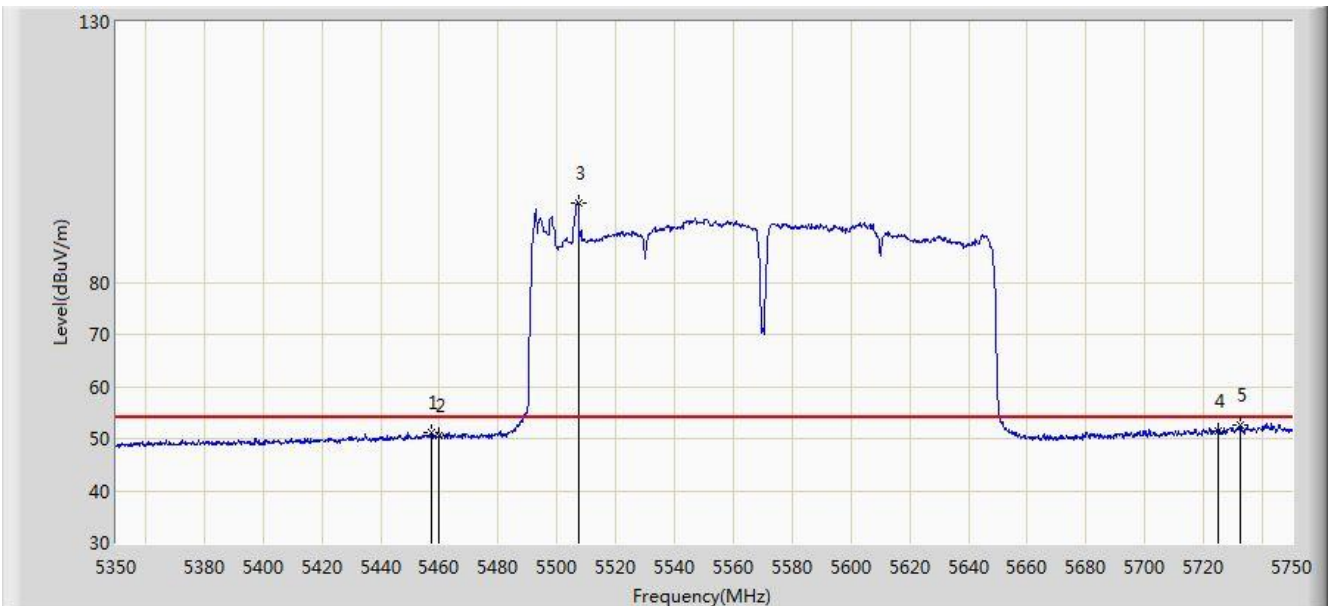


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.200	51.186	47.012	-2.814	54.000	4.174	AV
2			5460.000	50.500	46.320	-3.500	54.000	4.180	AV
3		*	5507.200	95.348	91.055	N/A	N/A	4.293	AV
4			5725.000	51.337	46.308	-2.663	54.000	5.029	AV
5			5732.400	52.636	47.560	-1.364	54.000	5.076	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5570MHz (Beam-Forming Mode)	

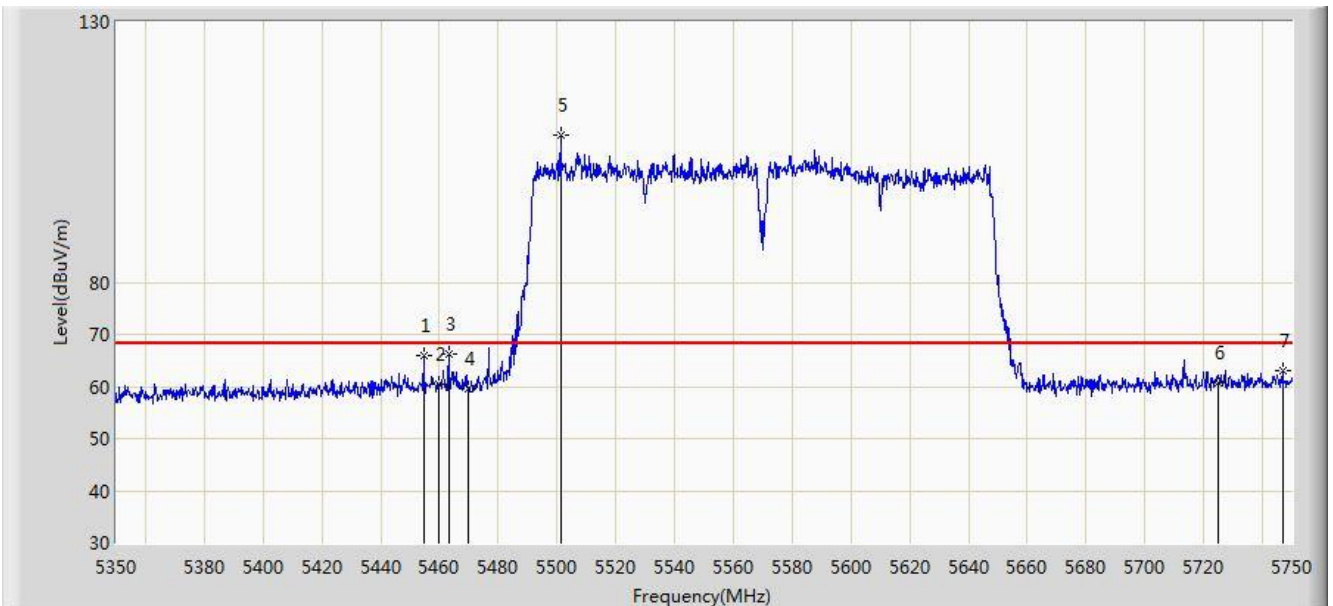


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.800	66.002	61.833	-2.198	68.200	4.170	PK
2			5460.000	60.335	56.155	-7.865	68.200	4.180	PK
3			5463.200	66.359	62.172	-1.841	68.200	4.187	PK
4			5470.000	59.541	55.339	-8.659	68.200	4.202	PK
5		*	5501.200	108.394	104.118	N/A	N/A	4.275	PK
6			5725.000	60.783	55.754	-7.417	68.200	5.029	PK
7			5746.800	62.943	57.778	-5.257	68.200	5.165	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ac-VHT160 at Channel 5570MHz (Beam-Forming Mode)	

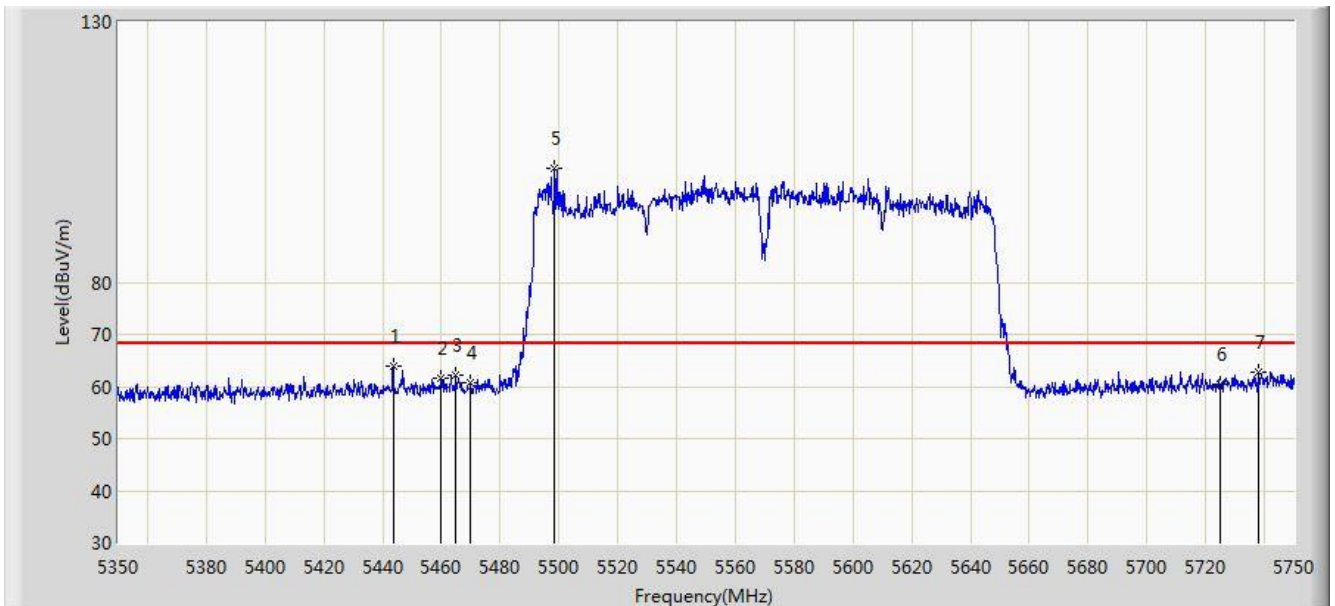


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.600	63.858	59.723	-4.342	68.200	4.135	PK
2			5460.000	61.622	57.442	-6.578	68.200	4.180	PK
3			5465.000	62.232	58.041	-5.968	68.200	4.191	PK
4			5470.000	60.764	56.562	-7.436	68.200	4.202	PK
5		*	5498.600	101.801	97.533	N/A	N/A	4.268	PK
6			5725.000	60.381	55.352	-7.819	68.200	5.029	PK
7			5738.000	62.747	57.635	-5.453	68.200	5.112	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 09:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5180MHz (Beam-Forming Mode)	

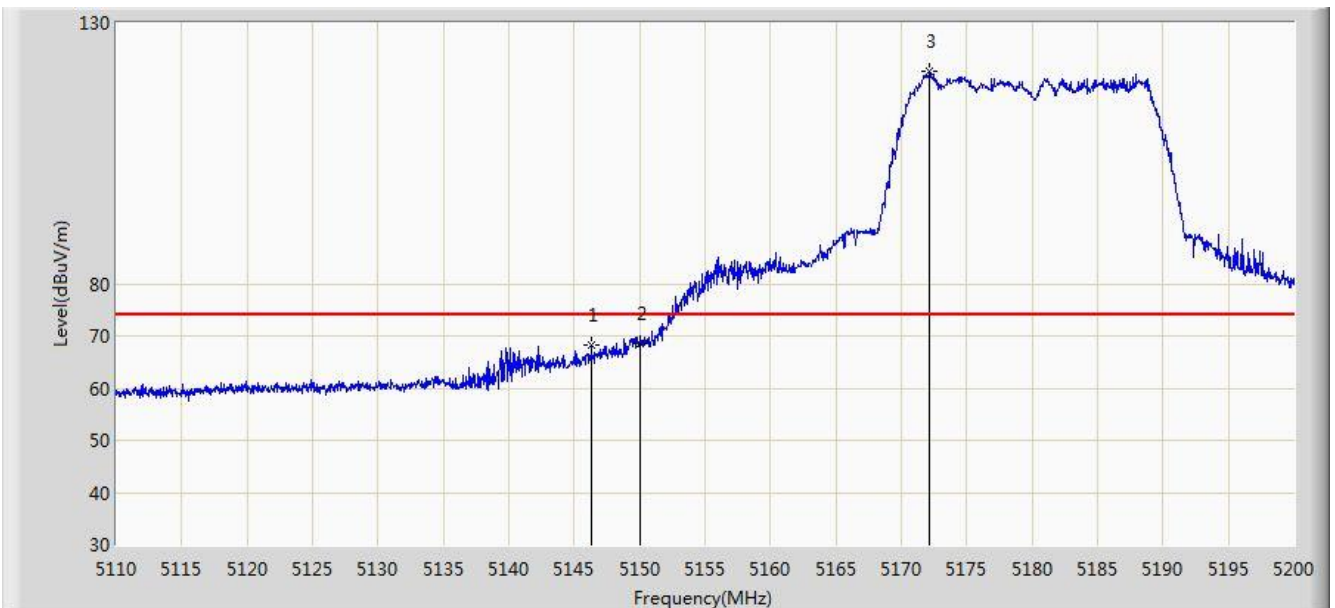


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.315	68.226	64.050	-5.774	74.000	4.176	PK
2			5150.000	68.662	64.493	-5.338	74.000	4.170	PK
3		*	5172.145	120.774	116.677	N/A	N/A	4.097	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 10:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5180MHz (Beam-Forming Mode)	

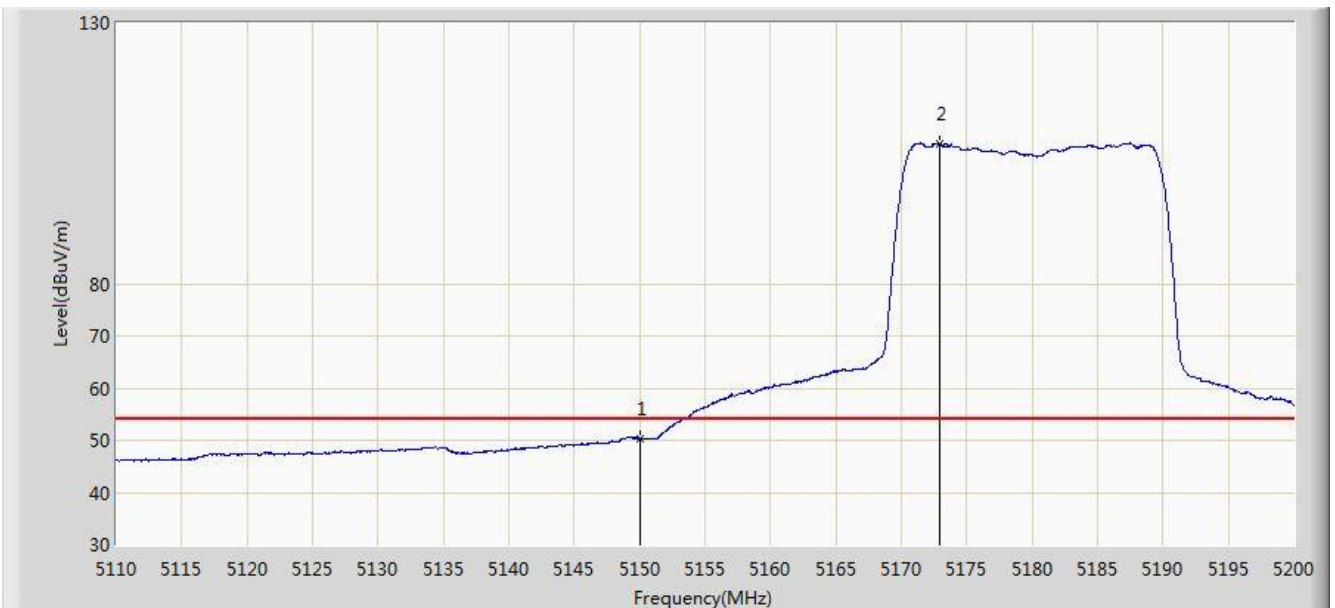


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.342	46.173	-3.658	54.000	4.170	AV
2		*	5172.955	106.891	102.797	N/A	N/A	4.094	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 10:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5180MHz (Beam-Forming Mode)	

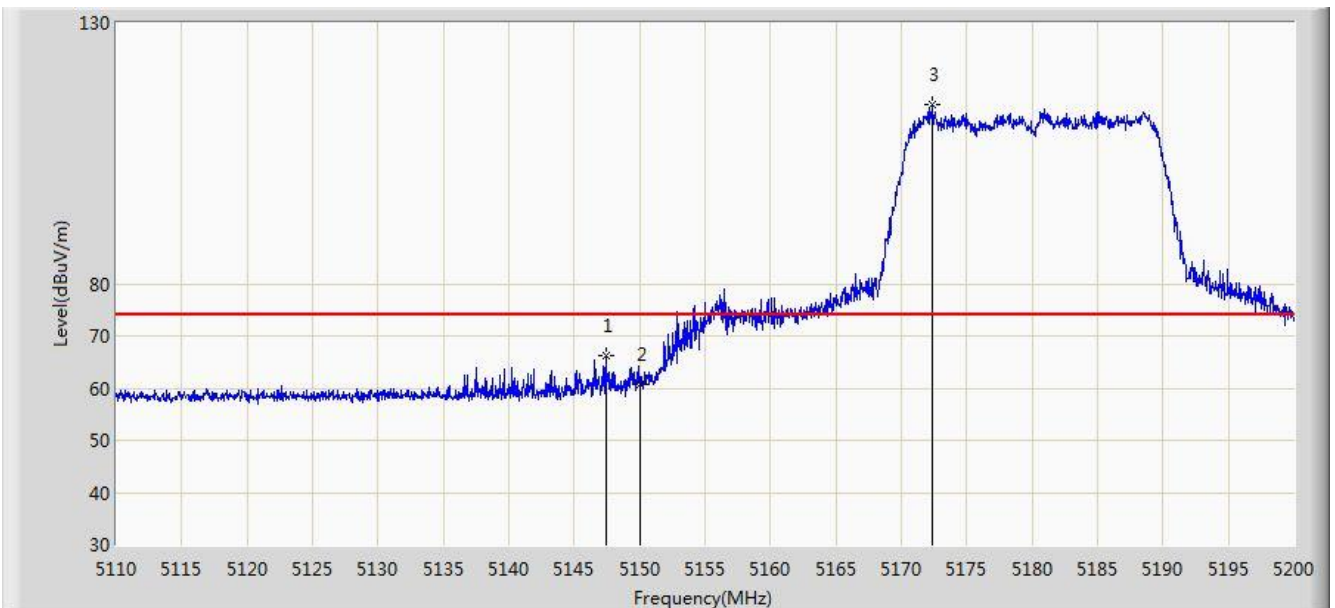


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.395	66.317	62.141	-7.683	74.000	4.175	PK
2			5150.000	60.617	56.448	-13.383	74.000	4.170	PK
3		*	5172.415	114.249	110.153	N/A	N/A	4.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 10:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5180MHz (Beam-Forming Mode)	

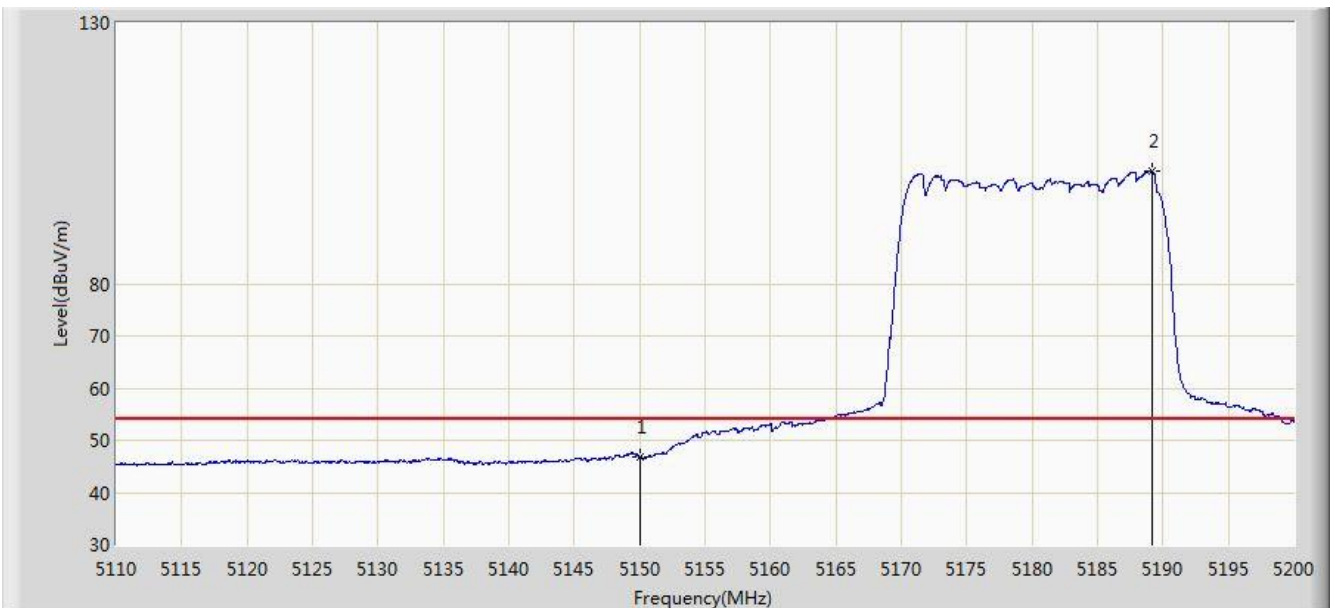


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.775	42.606	-7.225	54.000	4.170	AV
2		*	5189.155	101.620	97.584	N/A	N/A	4.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 10:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5320MHz (Beam-Forming Mode)	

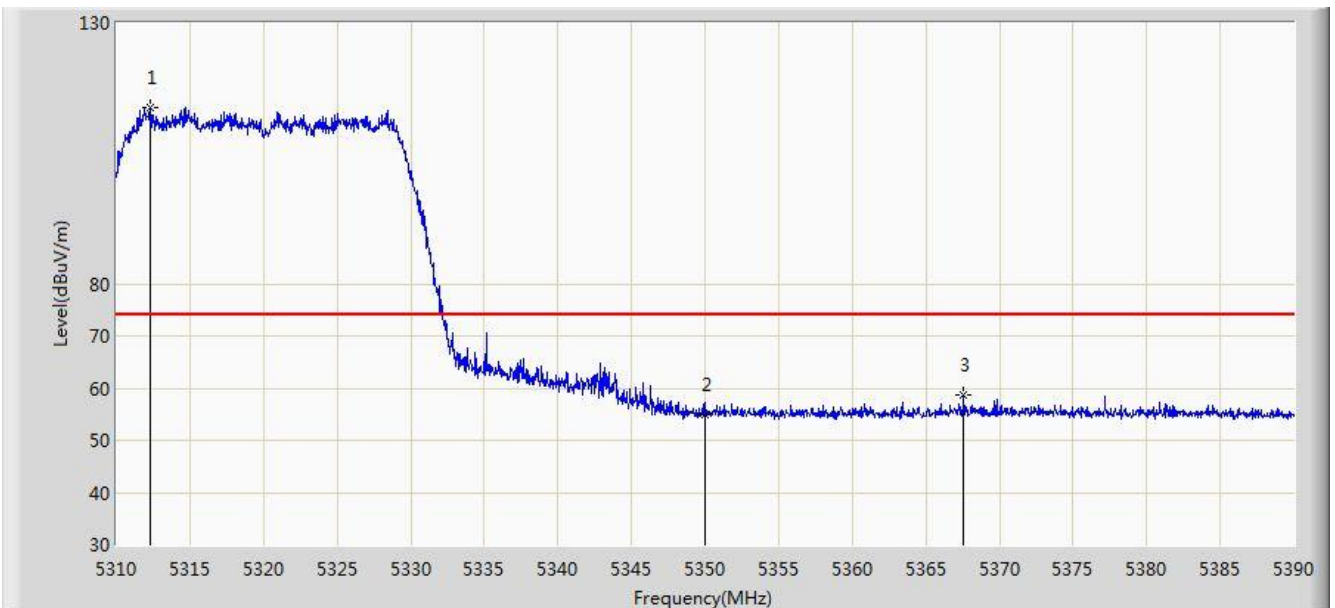


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.280	113.734	109.900	N/A	N/A	3.834	PK
2			5350.000	54.932	51.027	-19.068	74.000	3.904	PK
3			5367.560	58.688	54.752	-15.312	74.000	3.936	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 10:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5320MHz (Beam-Forming Mode)	

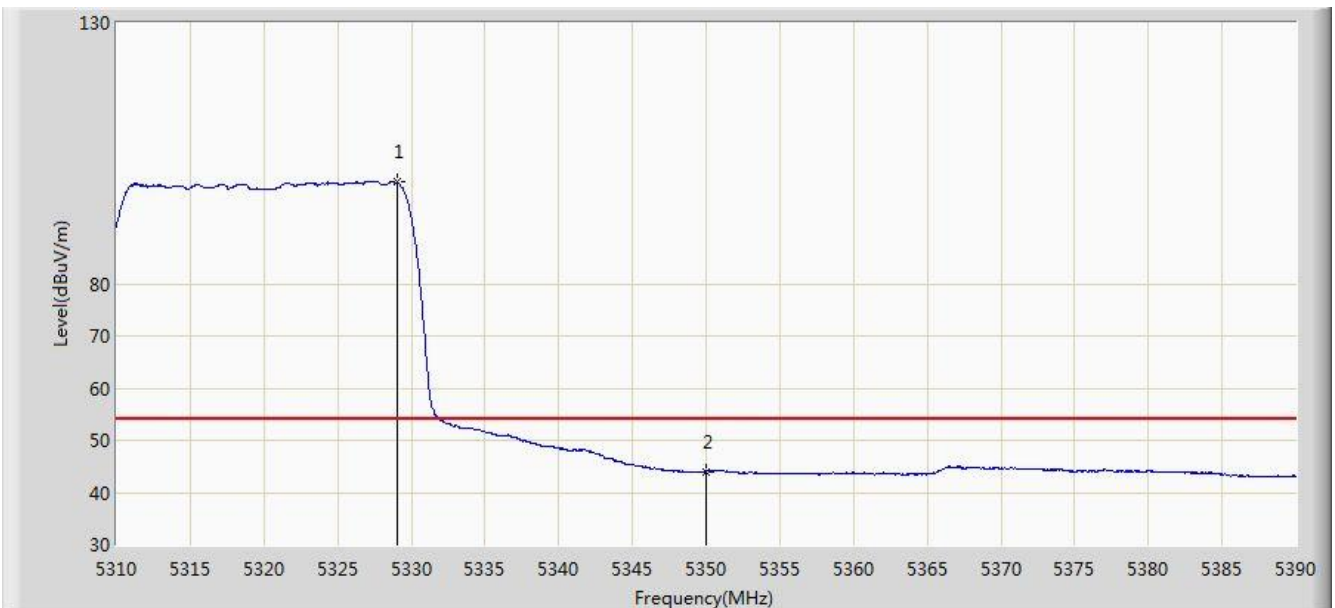


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5329.040	99.440	95.574	N/A	N/A	3.866	AV
2			5350.000	43.991	40.086	-10.009	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 10:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5320MHz (Beam-Forming Mode)	

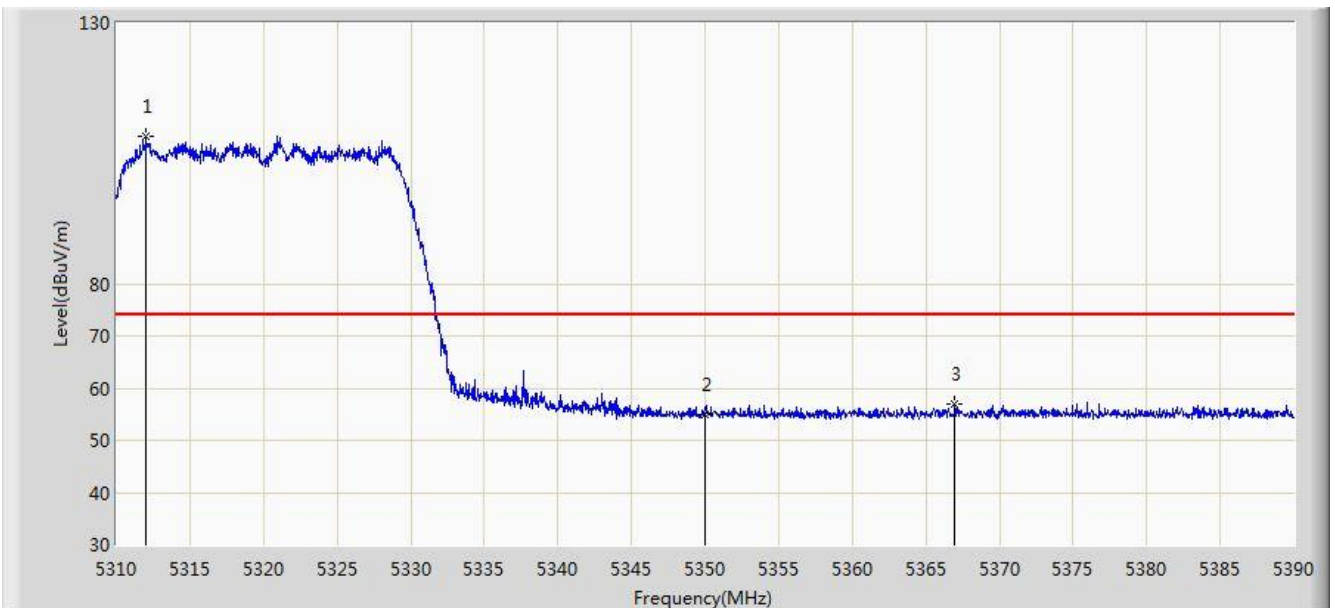


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.000	108.273	104.439	N/A	N/A	3.833	PK
2			5350.000	54.840	50.935	-19.160	74.000	3.904	PK
3			5366.960	56.950	53.015	-17.050	74.000	3.934	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5320MHz (Beam-Forming Mode)	

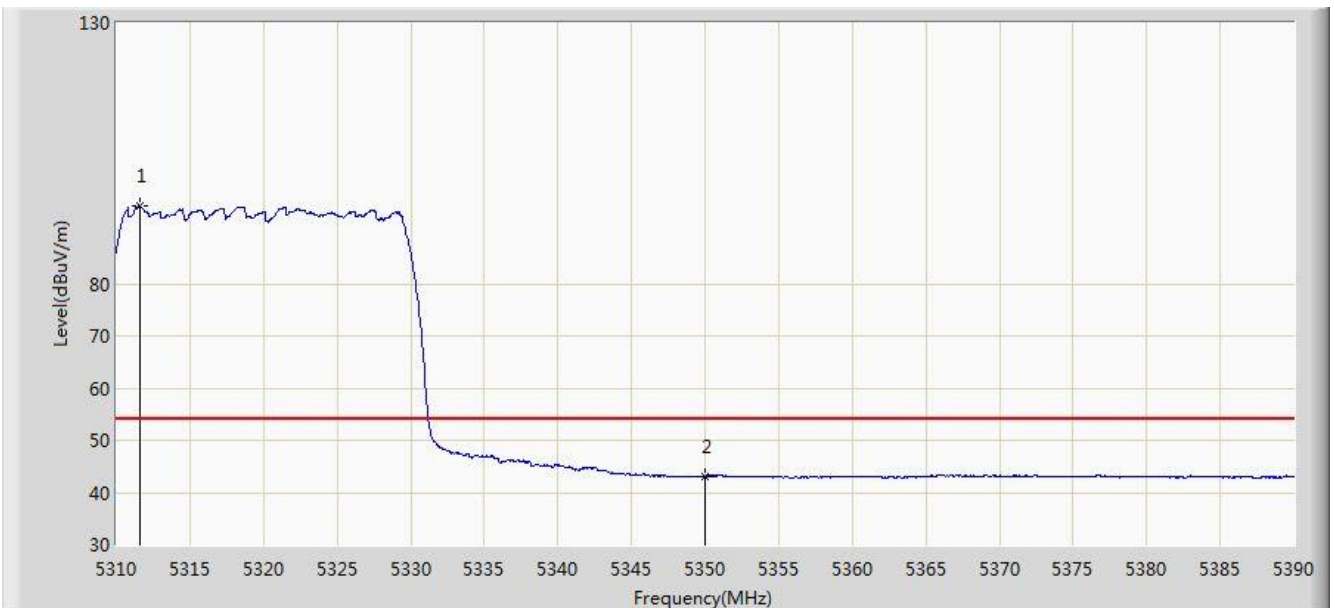


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.560	94.890	91.057	N/A	N/A	3.833	AV
2			5350.000	43.037	39.132	-10.963	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5500MHz (Beam-Forming Mode)	

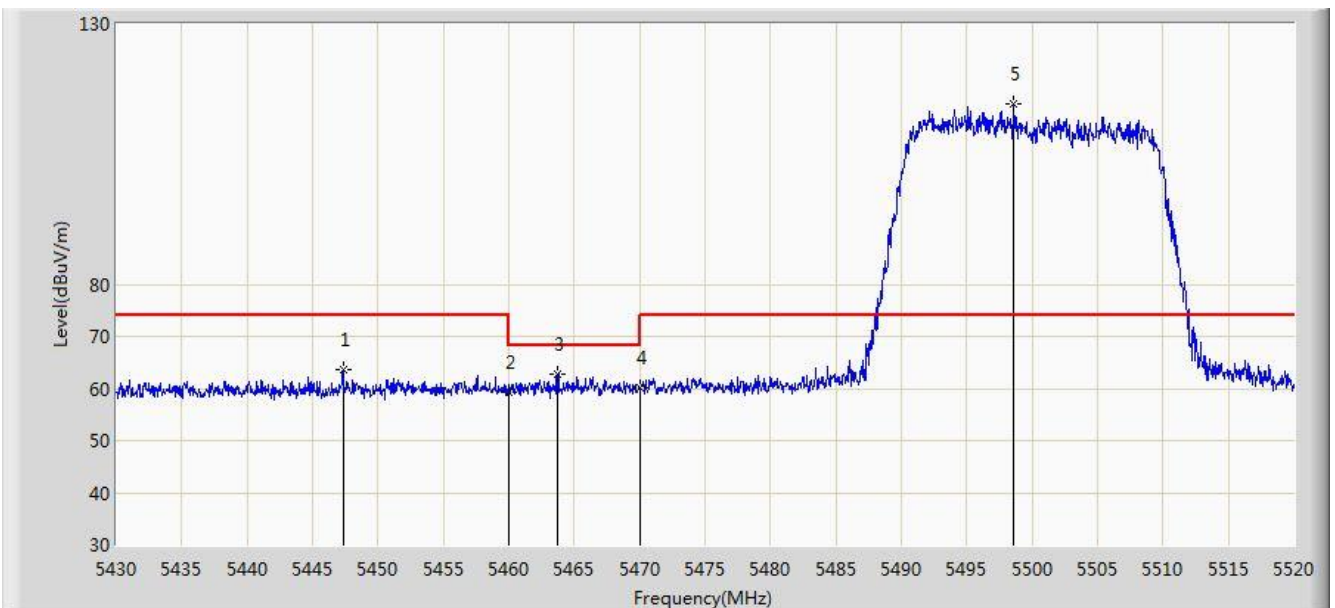


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.325	63.728	59.582	-10.272	74.000	4.146	PK
2			5460.000	59.407	55.227	-14.593	74.000	4.180	PK
3			5463.750	62.689	58.501	-5.511	68.200	4.189	PK
4			5470.000	60.050	55.848	-8.150	68.200	4.202	PK
5		*	5498.625	114.500	110.232	N/A	N/A	4.268	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5500MHz (Beam-Forming Mode)	

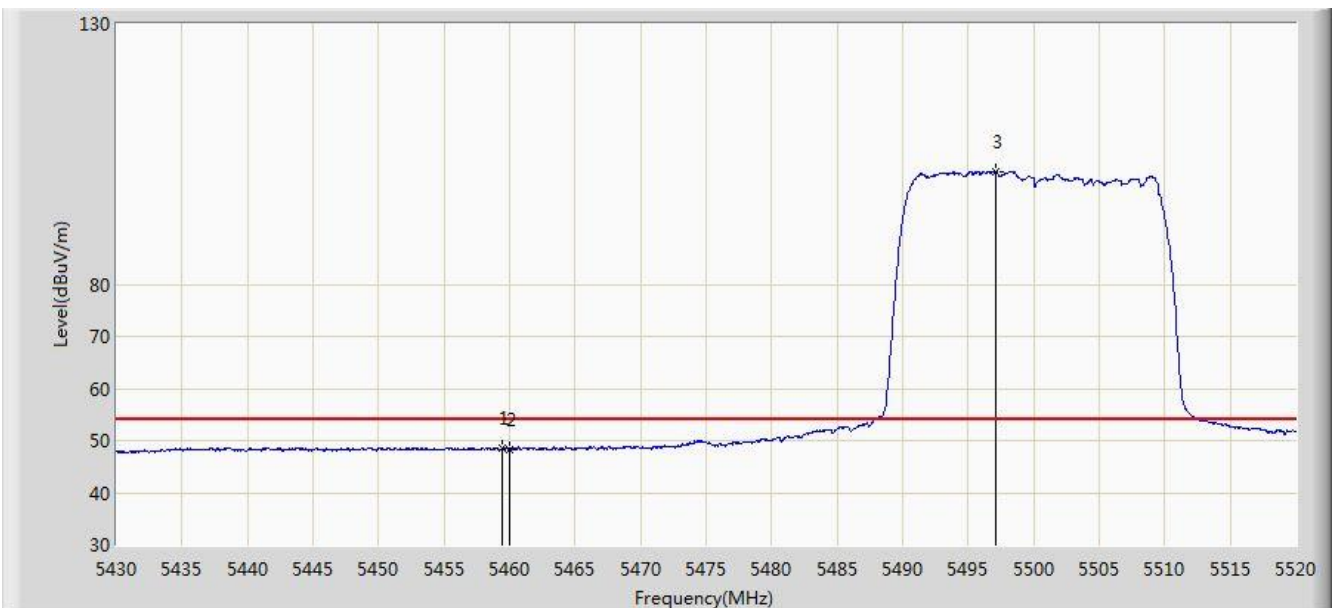


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.475	48.510	44.331	-5.490	54.000	4.179	AV
2			5460.000	48.328	44.148	-5.672	54.000	4.180	AV
3		*	5497.140	101.666	97.402	N/A	N/A	4.264	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5500MHz (Beam-Forming Mode)	

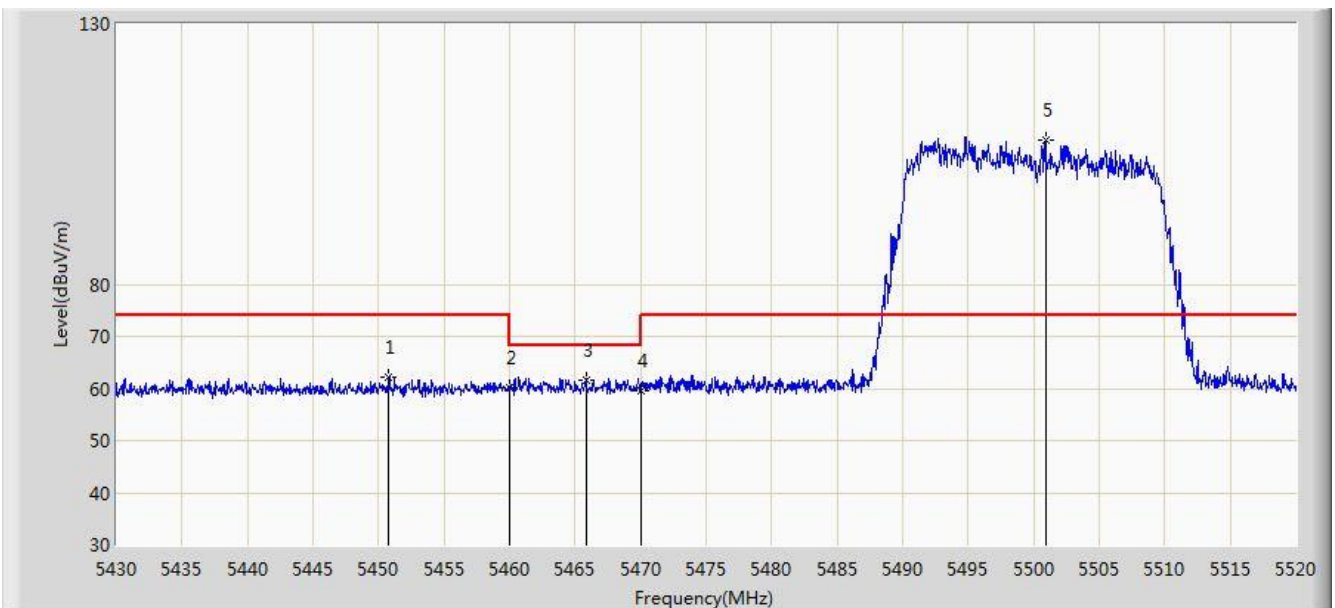


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.790	62.300	58.143	-11.700	74.000	4.157	PK
2			5460.000	60.072	55.892	-13.928	74.000	4.180	PK
3			5465.820	61.690	57.497	-6.510	68.200	4.193	PK
4			5470.000	59.549	55.347	-8.651	68.200	4.202	PK
5		*	5500.920	107.824	103.549	N/A	N/A	4.275	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5500MHz (Beam-Forming Mode)	

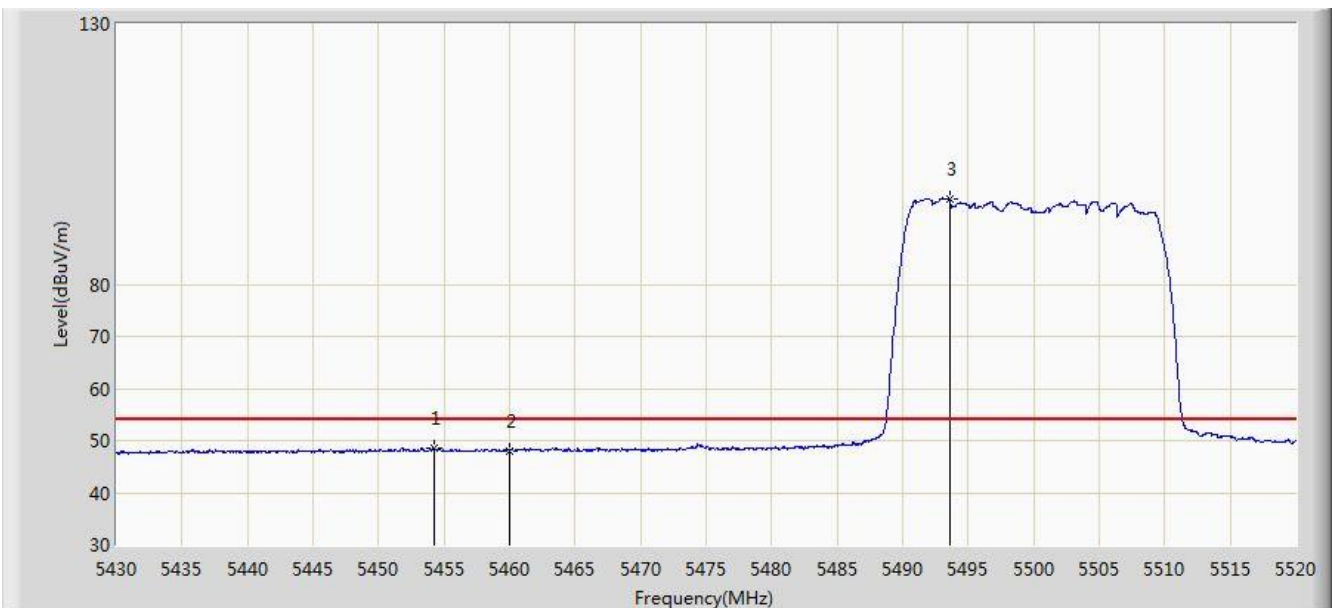


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.300	48.514	44.346	-5.486	54.000	4.168	AV
2			5460.000	48.111	43.931	-5.889	54.000	4.180	AV
3		*	5493.630	96.496	92.240	N/A	N/A	4.256	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5700MHz (Beam-Forming Mode)	

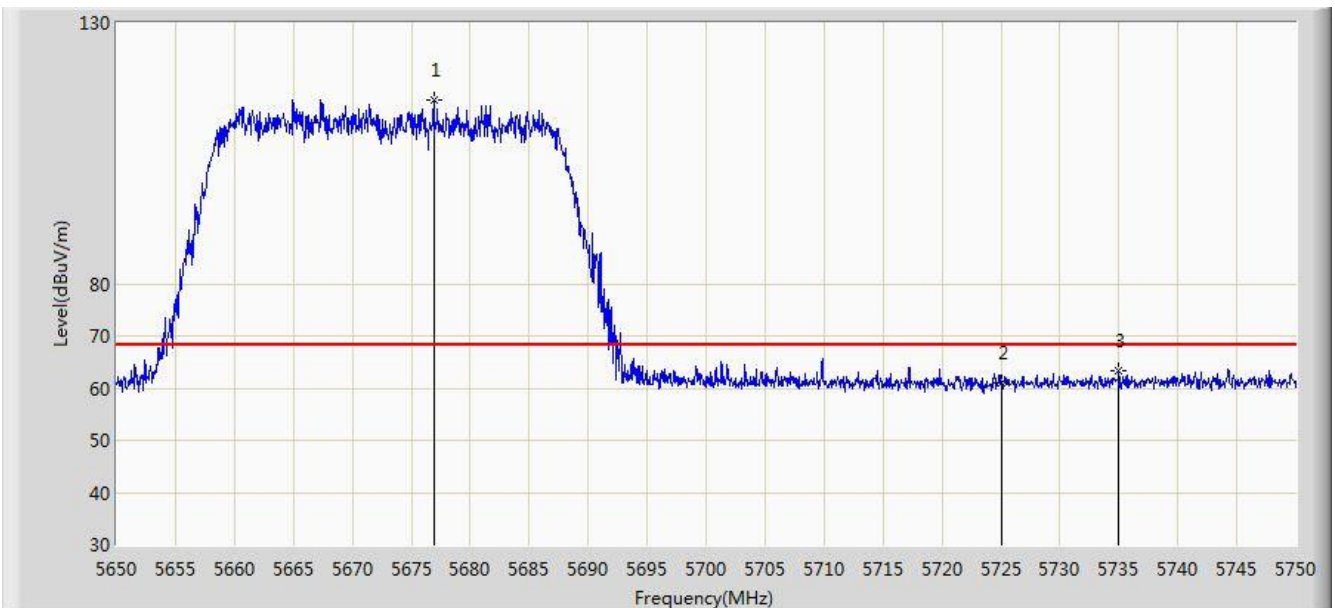


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.950	115.273	110.498	N/A	N/A	4.775	PK
2			5725.000	61.040	56.011	-7.160	68.200	5.029	PK
3			5734.950	63.319	58.227	-4.881	68.200	5.093	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5700MHz (Beam-Forming Mode)	

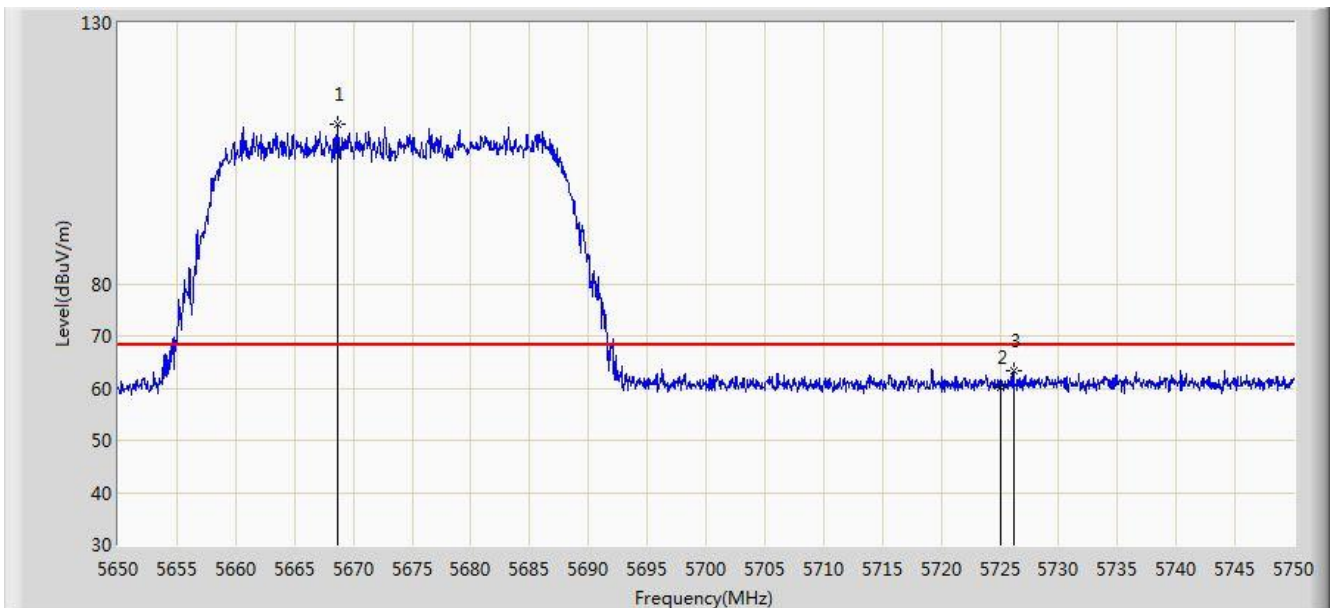


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5668.650	110.624	105.882	N/A	N/A	4.742	PK
2			5725.000	60.076	55.047	-8.124	68.200	5.029	PK
3			5726.150	63.267	58.231	-4.933	68.200	5.037	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5745MHz (Beam-Forming Mode)	

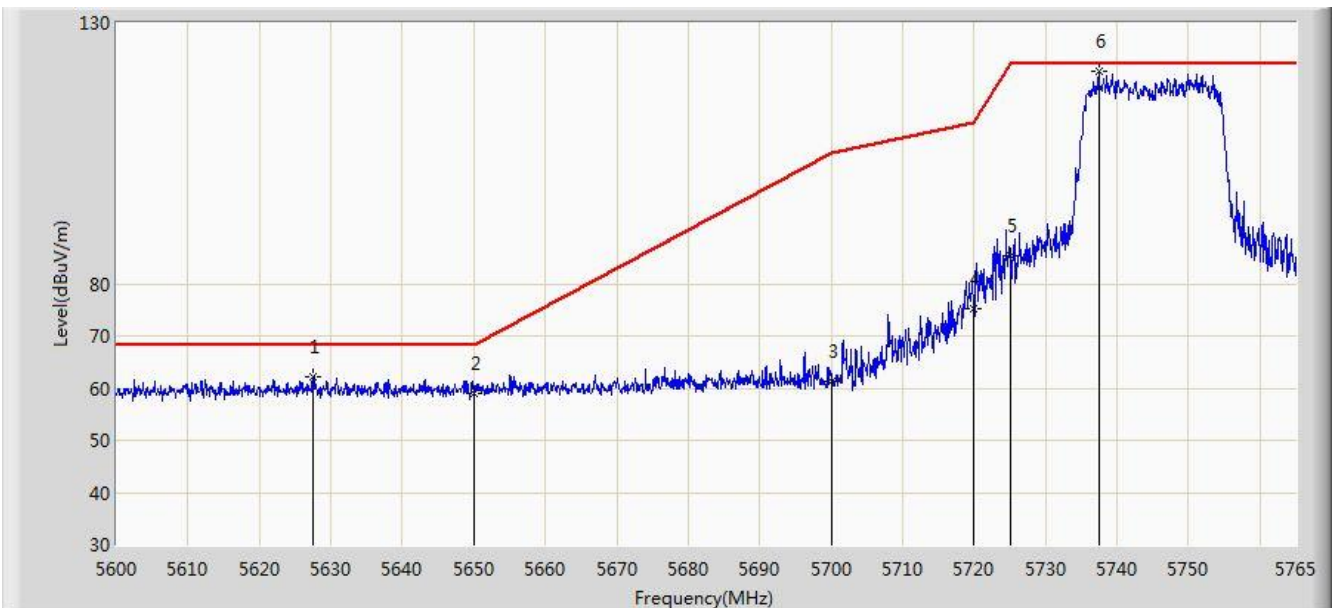


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5627.555	62.141	57.539	-6.059	68.200	4.602	PK
2			5650.000	58.939	54.268	-9.261	68.200	4.671	PK
3			5700.000	61.403	56.525	-43.797	105.200	4.878	PK
4			5720.000	75.189	70.192	-35.611	110.800	4.997	PK
5			5725.000	85.224	80.195	-36.976	122.200	5.029	PK
6		*	5737.445	120.628	115.520	N/A	N/A	5.108	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 21:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11 ax-HE20 at Channel 5745MHz (Beam-Forming Mode)	

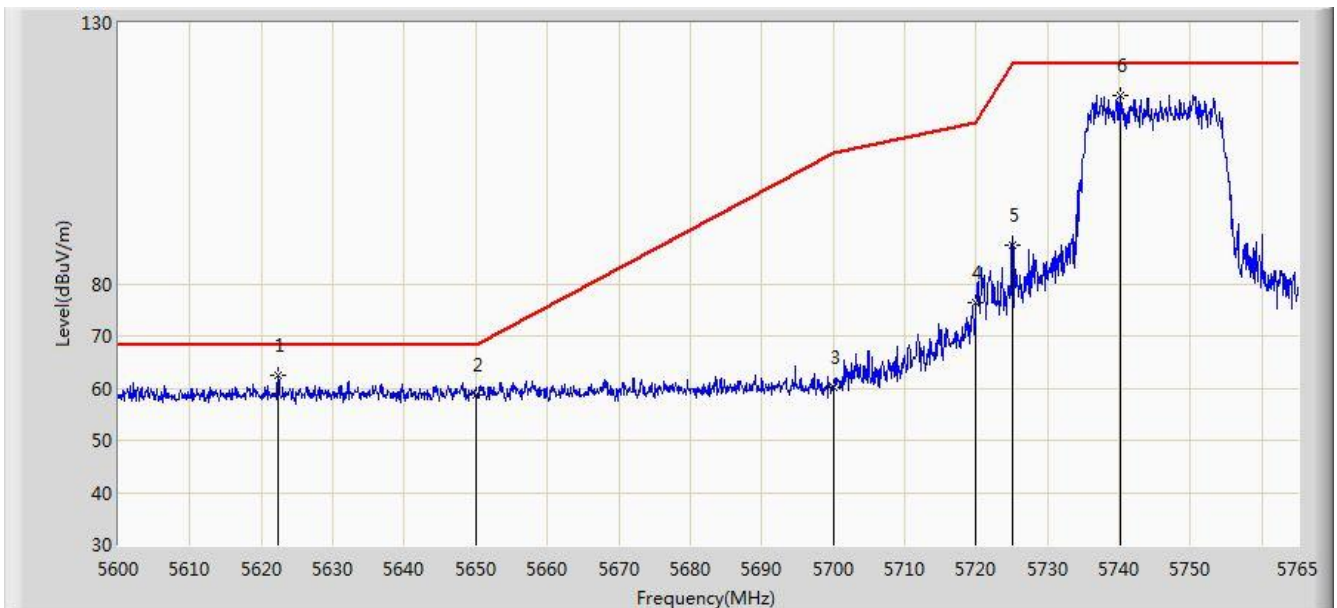

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5622.357	62.344	57.757	-5.856	68.200	4.587	PK
2			5650.000	58.683	54.012	-9.517	68.200	4.671	PK
3			5700.000	60.267	55.389	-44.933	105.200	4.878	PK
4			5720.000	76.381	71.384	-34.419	110.800	4.997	PK
5			5725.000	87.459	82.430	-34.741	122.200	5.029	PK
6			5740.085	116.065	110.940	N/A	N/A	5.125	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)