



Radio Test Report

Report No.:STS2603331W01

Issued for

Logitech INA Solutions Co., Ltd.

8268-1000 Misuzu, ina-City, Nagano, Japan 396-0111

Product Name: ZEROSHOCK TABLET Slim

Brand Name: N/A

Model Name: LZ-WA10L2

Series Model(s): LZ-WA10M2

Test Standard: Article 2 Paragraph 1 of Item 80

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.



TEST REPORT

Applicant's Name Logitech INA Solutions Co., Ltd.

Address 8268-1000 Misuzu, ina-City, Nagano, Japan 396-0111

Manufacturer's Name Logitech INA Solutions Co., Ltd.

Address 8268-1000 Misuzu, ina-City, Nagano, Japan 396-0111

Product Description

Product Name ZEROSHOCK TABLET Slim

Brand Name N/A

Model Name LZ-WA10L2

Series Model(s) LZ-WA10M2

Test Standards Article 2 Paragraph 1 of Item 80

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item 26 Aug. 2024

Date (s) of performance of tests 26 Aug. 2024~10 Oct. 2024

Date of Issue 12 Mar. 2026

Test Result **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents

1. SUMMARY OF THE TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.4 TEST CONDITIONS	12
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.6 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.7 EQUIPMENTS LIST	14
3. CONSTRUCTION PROTECTION CONFIRMATION	15
4. FREQUENCY ERROR	16
4.1 LIMIT	16
4.2 TEST PROCEDURES	16
4.3 TEST SETUP	16
4.4 TEST RESULT	16
5. ANTENNA POWER AND EIRP	17
5.1 LIMIT	17
5.2 TEST PROCEDURE	17
5.3 TEST SETUP	17
5.4 TEST DEVIATION	17
5.5 TEST RESULT	17
6. OCCUPIED BANDWITH	18
6.1 LIMIT	18
6.2 TEST PROCEDURES	18
6.3 TEST SETUP	18
6.4 TEST DEVIATION	18
6.5 TEST RESULT	18
7. UNWANTED EMISSION STRENGTH	19
7.1 LIMIT	19
7.2 TEST PROCEDURES	20
7.3 TEST SETUP	20
7.4 TEST DEVIATION	20
7.5 TEST RESULT	20
8. SECONDARY RADIATED EMISSIONS STRENGTH	21
8.1 LIMIT	21
8.2 TEST PROCEDURES	21
8.3 TEST RESULT	21



9. RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT	22
9.1 LIMIT	22
9.2 MEASURING ID CODE SOFTWARE	22
9.3 TEST PROCEDURES	22
9.4 TEST SETUP	22
9.5 TEST DEVIATION	22
9.6 TEST RESULT OF RADIO INTERFERENCE PREVENTION CAPABILITY	22
10. CARRIER SENSE CAPABILITY	23
10.1 TEST REQUIREMENT	23
10.2 TEST PROCEDURE	23
10.3 TEST RESULT	24
11. ADJACENT CHANNEL POWER	58
11.1 LIMIT	58
11.2 TEST PROCEDURES	58
11.3 TEST SETUP	58
11.4 TEST DEVIATION	58
11.5 EUT OPERATION DURING TEST	58
11.6 TEST RESULT	58
12. TRANSMISSION BURST LENGTH	59
12.1 LIMIT	59
12.2 TEST PROCEDURES	59
12.3 TEST SETUP	59
12.4 EUT OPERATION DURING TEST	59
12.5 TEST RESULT	59
13. EUT TEST PHOTO	60



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	10 Oct. 2024	STS2408324W01	ALL	Initial Issue
01	12 Mar.2026	STS2603331W01	ALL	update models and CPU



1. SUMMARY OF THE TEST RESULTS

Test procedures according to the technical standards: Article 2 Paragraph 1 of Item 79 & 80

Description of Test	Remark
Frequency Error	Complies
Occupied Bandwidth (99%)	Complies
Unwanted Emission Strength	Complies
Antenna Power/ tolerance	Complies
EIRP	Complies
Secondary Radiated Emission Strength	Complies
Communication Method	Complies
Modulation method	Complies
Transmission Data Rate	Complies
Transmission Burst Length	Complies
Adjacent channel Emitted Power	Complies
Interference prevention function	Complies
Number of carrier	Complies
Carrier sense capability	Complies
Construction Protection Confirmation	Complies

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) This device has more than 1 subcarrier in 1MHz, compliances with the requirement.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	Frequency tolerance	$\pm 0.03\text{ppm}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Equipment	ZEROSHOCK TABLET Slim	
Trademark	N/A	
Model Name	LZ-WA10L2	
Series Model	LZ-WA10M2	
Model Difference	All these models are identical in the same structure, electronic parts and PCB board. The differences are model name, appearance color and screen resolution.	
Product Description	The EUT is ZEROSHOCK TABLET Slim	
	Operation Frequency	5 945 MHz ~ 6 425 MHz
	Modulation Type	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM, 1024QAM
	Antenna Gain(Peak)	ANT 1: 2.44dBi ANT 2: 2.44dBi
Based on the application, features, or specification exhibited in User Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User Manual.		
Channel List	Please see Note 1	
Adapter	Input: AC100-240V 50/60Hz 1.3A Output: DC 5V 3.0A, DC 9V 3.0A, DC 15V 3.0A, DC 20V 2.25A	
Battery	Rated Voltage: 7.6V Charge Limit Voltage: 8.7V Capacity: 4500mAh	
Hardware Version	E7251LG3_MAIN_V3.0	
Software Version	21H2	

Note:



1.

Channel List

(BW 20MHz)		(BW 40MHz)		(BW 80MHz)		(BW 160MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	3	5965	7	5985	15	6025
5	5975	11	6005	23	6065	47	6185
9	5995	19	6045	39	6145	79	6345
13	6015	27	6085	55	6225	/	/
17	6035	35	6125	71	6305	/	/
21	6055	43	6165	87	6385	/	/
25	6075	51	6205	/	/	/	/
29	6095	59	6245	/	/	/	/
33	6115	67	6285	/	/	/	/
37	6135	75	6325	/	/	/	/
41	6155	83	6365	/	/	/	/
45	6175	91	6405	/	/	/	/
49	6195	/	/	/	/	/	/
53	6215	/	/	/	/	/	/
57	6235	/	/	/	/	/	/
61	6255	/	/	/	/	/	/
65	6275	/	/	/	/	/	/
69	6295	/	/	/	/	/	/
73	6315	/	/	/	/	/	/
77	6335	/	/	/	/	/	/
81	6355	/	/	/	/	/	/
85	6375	/	/	/	/	/	/
89	6395	/	/	/	/	/	/
93	6415	/	/	/	/	/	/

2.

Test Channel

(BW 20MHz)		(BW 40MHz)		(BW 80MHz)		(BW 160MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	3	5965	7	5985	15	6025
45	6175	43	6165	39	6145	47	6185
93	6415	91	6405	87	6385	79	6345

3

Ant.	Brand	Model Name	Type	Connector	Gain (dBi)	NOTE
1	N/A	LZ-WA10M	FPC Antenna	N/A	ANT 1: 2.44dBi	WIFI Antenna
2			FPC Antenna	N/A	ANT 2: 2.44dBi	WIFI Antenna



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a CH1&45&93	6 Mbps
Mode 2	TX IEEE 802.11n HT20 CH1&45&93	MCS 0
Mode 3	TX IEEE 802.11ac VHT20 CH1&45&93	NSS1 MCS0
Mode 4	TX IEEE 802.11ax HE20 CH1&45&93	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT40 CH3&CH43&91	MCS 0
Mode 6	TX IEEE 802.11ac VHT40 CH3&CH43&91	NSS1 MCS0
Mode 7	TX IEEE 802.11ax HE40 CH3&CH43&91	NSS1 MCS0
Mode 8	TX IEEE 802.11ac VHT80 CH7&38&87	NSS1 MCS0
Mode 9	TX IEEE 802.11ax HE80 CH7&38&87	NSS1 MCS0
Mode 10	TX IEEE 802.11ac VHT160 CH15&47&79	NSS1 MCS0
Mode 11	TX IEEE 802.11ax HE160 CH15&47&79	NSS1 MCS0

Note: 802.11a mode antennas 1 and 2 all can transmit, but only support SISO function.



2.3 TABLE FOR PARAMETERS OF THE TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. the RF output power selection is for the setting of RF output power expected by the customer and going to be fixed on the firmware of the final end product.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT 1 Power Class	ANT 2 Power Class	Software For Testing
WIFI(6E)	U-NII-5 (5925MHz-6425MHz)	802.11a	ANT 1 : 2.44 ANT 2 : 2.44	15	15	DRTU
		802.11n(HT20)		12	12	
		802.11n(HT40)		12	12	
		802.11ac(VHT20)		12	12	
		802.11ac(VHT40)		12	12	
		802.11ac(VHT80)		13	13	
		802.11ac(VHT160)		14	14	
		802.11ax(HE20)		6	6	
		802.11ax(HE40)		12	12	
		802.11ax(HE80)		13	13	
		802.11ax(HE160)		14	14	



2.4 TEST CONDITIONS

The WIFI module was tested while in a continuous transmitter/receiver mode.

The EUT was tuned to a low, middle, and high channel for all tests. For all test case pre/scans were completed in allModes to determine worst case levels.

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 25.1°C
- Humidity: 54 %
- Atmospheric pressure: 93 kpa

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input DC Power(V)	7.6	8.36	6.84
RF Chip Input DC Power(V)	2.723	2.733	2.719
Voltage Variation (%)	/	0.37	-0.15

Note: 1. Voltage Variation (%)


= (RF chip Input high or Low Voltage - RF chip Input Normal Voltage) / RF chip Input Normal Voltage * 100

2. RF chip Input DC power fluctuation is verified at the power input PIN of the RF chip.

When the input supply voltage to the EUT from the external power source is varied by +/- 10%, the output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/-1%, and the DC power fluctuation at the power input PIN of the RF chip is equal to or less than +/-1%. Exempt extremely high and low supply voltage condition tests, EUT only operated in normal voltage to test all regulations.



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

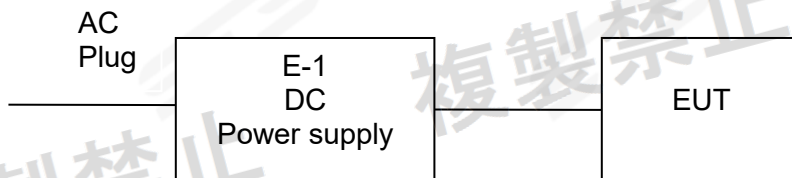

2.6 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-1	DC Power supply	HONGSHENGFENG	DPS-305AF	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

**2.7 EQUIPMENTS LIST**


RF Connected Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Generator	Keysight	N5182B	MY57301448	2024.09.23	2025.09.22
Signal Analyzer	Agilent	N9020A	MY51510623	2024.02.23	2025.02.22
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Power Sensor	Keysight	U2021XA	MY56120038	2024.09.23	2025.09.22
Power Divider	eastsheep	PD-0.5/0.6-2S	B519	2024.02.23	2025.02.22
Attenuator	Agilent	8494B	DC-18G	2024.02.23	2025.02.22
Power Divider	eastsheep	PD-0.5/0.6-2S	B519	2024.02.23	2025.02.22
DC power supply	HONGSHENG FENG	DPS-305AF	17064939	2024.09.23	2025.09.22
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Test SW	MW	MTS 8310_2.0.0.0			

Note: The calibration agency listed on the table corresponds to item ii c) of Article 24-2 paragraph 4.



3. CONSTRUCTION PROTECTION CONFIRMATION

Our products apply for Japanese radio frequency (rf) certification. We use the following methods to prevent unauthorized access and modification of RF and modulation parts. This wireless module uses a shielding cover to prevent users from disassembling and modifying it.

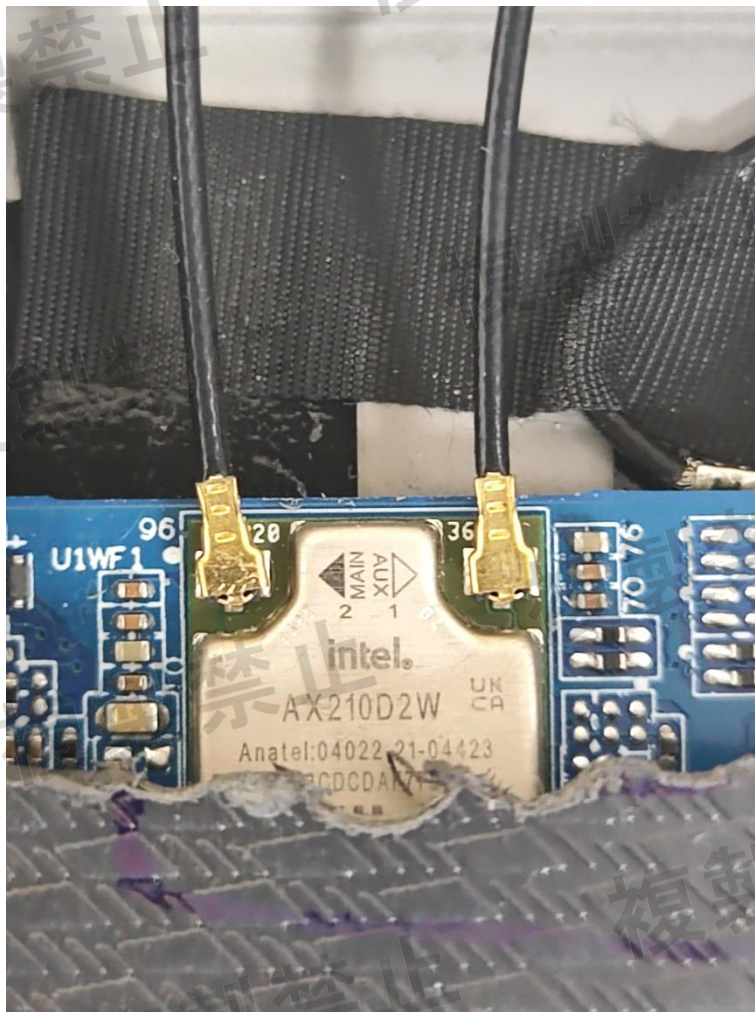



4. FREQUENCY ERROR

4.1 LIMIT

Item	Limits
Frequency Error	$\pm 20\text{ppm}$

4.2 TEST PROCEDURES

The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	10KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- (1) In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.
- (2) In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.
- (3) In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer.
- (4) In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.

In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.

4.3 TEST SETUP



4.4 TEST RESULT

Note: The test data please reference to attachment "STS2408324W01_Appendix WIFI 6E".



5. ANTENNA POWER AND EIRP


5.1 LIMIT

Item	Operation Band	Limits			
		20MHz system	40MHz system	80MHz system	160MHz system
Antenna Power	5955 MHz ~ 6415MHz	10mW/MHz or less	5mW/MHz or less	2.5mW/MHz or less	1.25mW/MHz or less
E.I.R.P (VLP)		1.25mW/MHz or less	0.625mW/MHz or less	0.3125mW/MHz or less	0.15625mW/MHz or less
E.I.R.P (LPIr)		10mW/MHz or less	5mW/MHz or less	2.5mW/MHz or less	1.25mW/MHz or less
Antenna Power Error		+20%, -80% (Base on manufacturer declare Antenna power density)			

5.2 TEST PROCEDURE

1. A power meter is connected on the IF output port of the spectrum analyzer.
2. EUT turn to test frequency channel and keep continuous transmitting
3. Connected the equipment to be measured. Using the following settings of the spectrum analyzer in combination with "max hold" function, find the frequency of highest power output in the power envelope: center frequency equal to operation frequency; RBW & VBW: 1 MHz; detector mode: positive peak; averGaing: off; span: 3 times the spectrum width; amplitude: adjust for middle of the instrument' range.
4. Reading the output power from the Power meter as P_{EUT}
5. Turn the Signal generator to frequency channel the same as the EUT
6. Using the following settings of the spectrum analyzer in combination with "max hold" function, find the frequency of highest power output in the power envelope: center frequency equal to operation frequency; RBW & VBW: 1 MHz; detector mode: positive peak; averGaing: off; span: 3 times the spectrum width; amplitude: adjust for middle of the instrument' range.
7. Turn the level of Signal generator, scan with the power meter until the power equal to P_{EUT} , the level of Signal generator recorded as "P"
8. The antenna power of EUT is "P".
9. EIRP power="P"+antenna gain

5.3 TEST SETUP

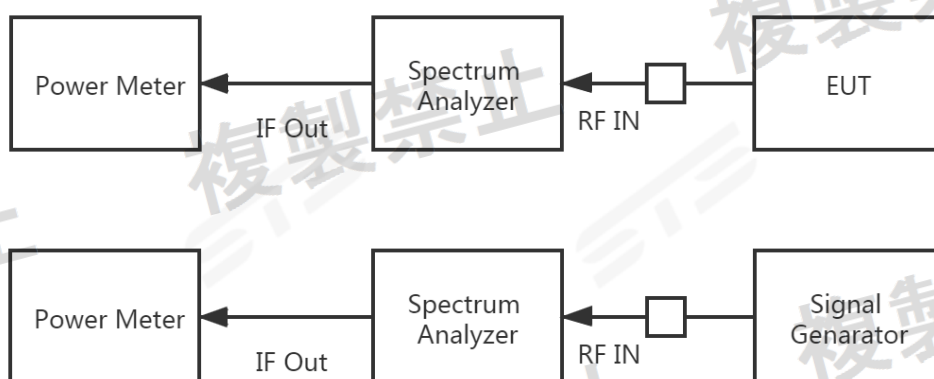

5.4 TEST DEVIATION

There is no deviation with the original standard.

5.5 TEST RESULT

Note: The test data please reference to attachment "STS2408324W01_Appendix WIFI 6E".



6. OCCUPIED BANDWITH

6.1 LIMIT

Item	Operation Band	Limits			
		20MHz system	40MHz system	80MHz system	160MHz system
Occupied BandWidth	5955 MHz ~ 6415MHz	≤20MHz	≤40MHz	≤80MHz	≤160MHz

6.2 TEST PROCEDURES

1. Setting of SA is following as: RB: 100KHz / VB:300KHz / SPAN: 40/80/160MHz
Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
2. EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode(For FHSS Device).
3. SA set to 99% of occupied bandwidth to measure occupied bandwidth.

6.3 TEST SETUP



6.4 TEST DEVIATION

There is no deviation with the original standard.

6.5 TEST RESULT

Note: The test data please reference to attachment "STS2408324W01_Appendix WIFI 6E".



7. UNWANTED EMISSION STRENGTH

7.1 LIMIT

VLP mode	Reference channel	Frequency range	Allowable value
20MHz system	5955MHz	5,925 MHz or less	0.2 μ W/MHz
	6415MHz	6,425 MHz or more, less than 6,425.5 MHz	50 μ W/MHz
		6,425.5 MHz or more	12.5 μ W/MHz
40MHz system	5965MHz	5,925 MHz or less	0.2 μ W/MHz
	6405MHz	6,425 MHz or more, less than 6,425.4 MHz	50 μ W/MHz
		6,425.4 MHz or more	12.5 μ W/MHz
80MHz system	5985MHz	5,925 MHz or less	0.2 μ W/MHz
	6385MHz	6,425 MHz or more, less than 6,425.2MHz	50 μ W/MHz
		6,425.2 MHz or more	12.5 μ W/MHz
160MHz system	6025MHz	5,925 MHz or less	0.2 μ W/MHz
	6345MHz	6,425 MHz or more, less than 6,425.1 MHz	50 μ W/MHz
		6,425.1 MHz or more	12.5 μ W/MHz

LPI mode	Reference channel	Frequency range	Allowable value
20MHz system	5955MHz	5,925 MHz or less	2 μ W/MHz
	6415MHz	6,425 MHz or more, less than 6,435.9 MHz	50 μ W/MHz
		6,435.9 MHz or more	12.5 μ W/MHz
40MHz system	5965MHz	5,925 MHz or less	2 μ W/MHz
	6405MHz	6,425 MHz or more , less than 6,440.1 MHz	50 μ W/MHz
		6,440.1 MHz or more	12.5 μ W/MHz
80MHz system	5985MHz	5,925 MHz or less	2 μ W/MHz
	6385MHz	6,425 MHz or more, less than 6,440.4 MHz	50 μ W/MHz
		6,440.4 MHz or more	12.5 μ W/MHz
160MHz system	6025MHz	5,925 MHz or less	2 μ W/MHz
	6345MHz	6,425 MHz or more, less than 6,425.5 MHz	50 μ W/MHz
		6,425.5 MHz or more	12.5 μ W/MHz



7.2 TEST PROCEDURES

The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	100KHz /100KHz ($30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$) 1MHz /1MHz ($1000 \text{ MHz} \leq f$)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: RB:100KHz/1MHz ,VB:100KHz/1MHz Sweep time: Auto Sweep Mode: Continuous sweep / Detect mode: Positive peak/ Trace mode: Max hold
3. Setting the frequency, then to mark peak reading value + cable loss shall be less section 7.1

7.3 TEST SETUP



7.4 TEST DEVIATION

There is no deviation with the original standard.

7.5 TEST RESULT

Note: The test data please reference to attachment "STS2408324W01_Appendix WIFI 6E".



8. SECONDARY RADIATED EMISSIONS STRENGTH

8.1 LIMIT

Item	Operation band	Limits	
RX Spurious Emission:	5955 MHz ~ 6415MHz	20MHz system	$\leq 4\text{nW}$ ($f \leq 1\text{GHz}$) $\leq 20\text{nW}$ ($f \geq 1\text{GHz}$)
		40MHz system	
		80MHz system	
		160MHz system	

8.2 TEST PROCEDURES

The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
VB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

1. EUT have the continuous reception mode and fixed only one channelize.
2. Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) / AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
4. SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 26500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
5. If power level of lower emissions are more than 1/10 of limit (.0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.

8.3 TEST RESULT

Note: The test data please reference to attachment "STS2408324W01_Appendix WIFI 6E".

9. RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT

9.1 LIMIT

Item	Limits
Identification code	≥ 48 bits


9.2 MEASURING ID CODE SOFTWARE

Item	Limits
MAC IP List	MAC Scan

9.3 TEST PROCEDURES

- In the case that the EUT has the function of automatically transmitting the identification code:
 - Transmit the predetermined identification codes from EUT.
 - Check the transmitted identification codes with the demodulator.
- In the case of receiving the identification code:
 - Transmit the predetermined identification codes from the counterpart.
 - Check if communication is normal.
 - Transmit the signals other than predetermined ID codes from the counterpart.
 - check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

9.4 TEST SETUP

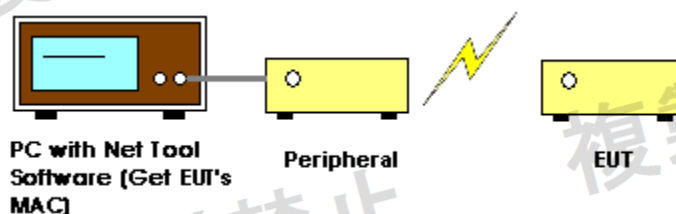

9.5 TEST DEVIATION

There is no deviation with the original standard.

9.6 TEST RESULT OF RADIO INTERFERENCE PREVENTION CAPABILITY

B0-3C-DC-DA-C3-93

The MAC address is B0-3C-DC-DA-C3-93.

10. CARRIER SENSE CAPABILITY

10.1 TEST REQUIREMENT


MIC Notice No.88 Appendix No.45

Article 2, Paragraph 1, Item 19-3 Rules

10.2 TEST PROCEDURE

1. SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG and power level is (Equal to the value of the electric field strength to 100mV / m).
2. Turn off the RF signal of the SG.
3. EUT have transmitted the maximum modulation signal and fixed channelize.
4. Setting of SA :RBW/VBW=1MHz/1MHz,,Sweep time=auto,Sweep mode=continuous, Detect mode=positive peak
5. SG RF signal on.
6. EUT shall be stop the transmitted any signal and SG RF signal off, the EUT will be continuous

❖ Measurement System Diagram

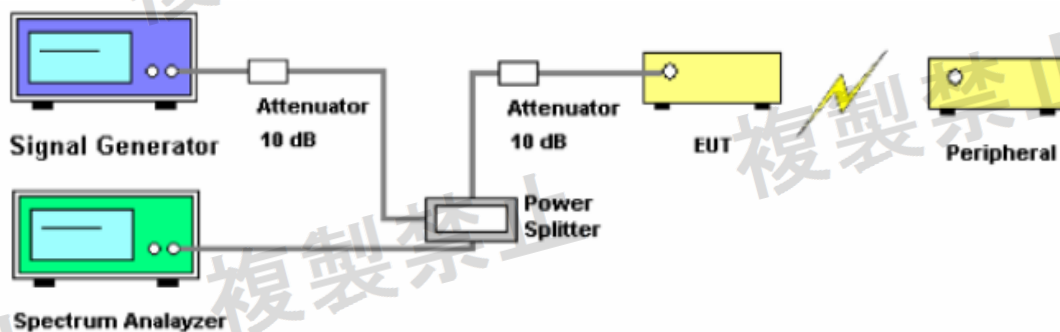

❖ Conditions of Application Equipment (EUT)


- The EUT state shall be “normal mode link with wireless router”.




10.3 TEST RESULT


ANT 1


Channel 1TX- 11 a(HT20) Mode

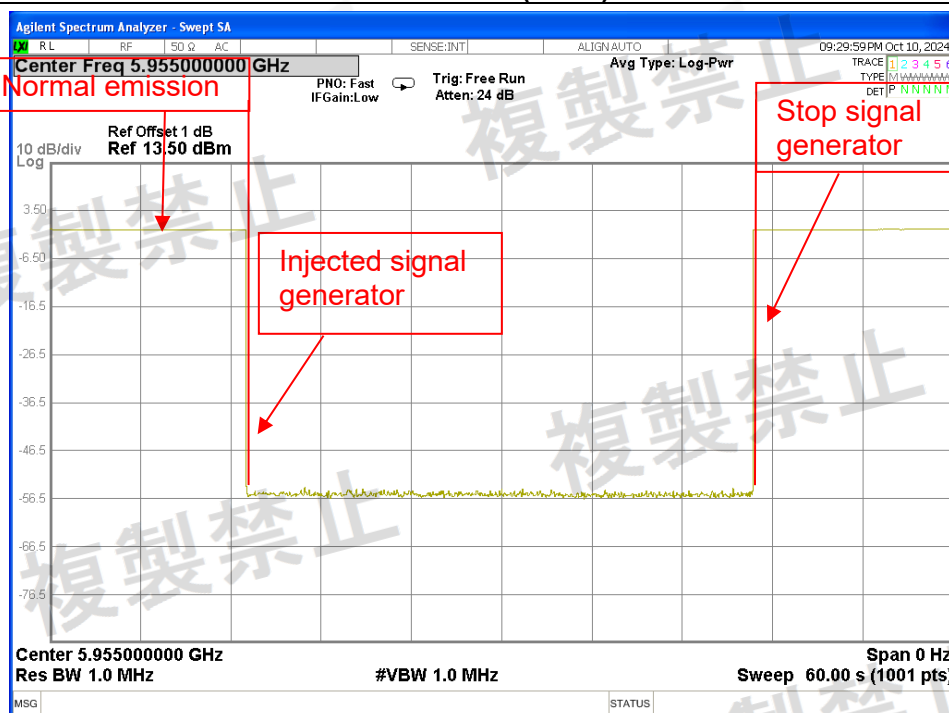



Channel 45TX- 11 a(HT20) Mode


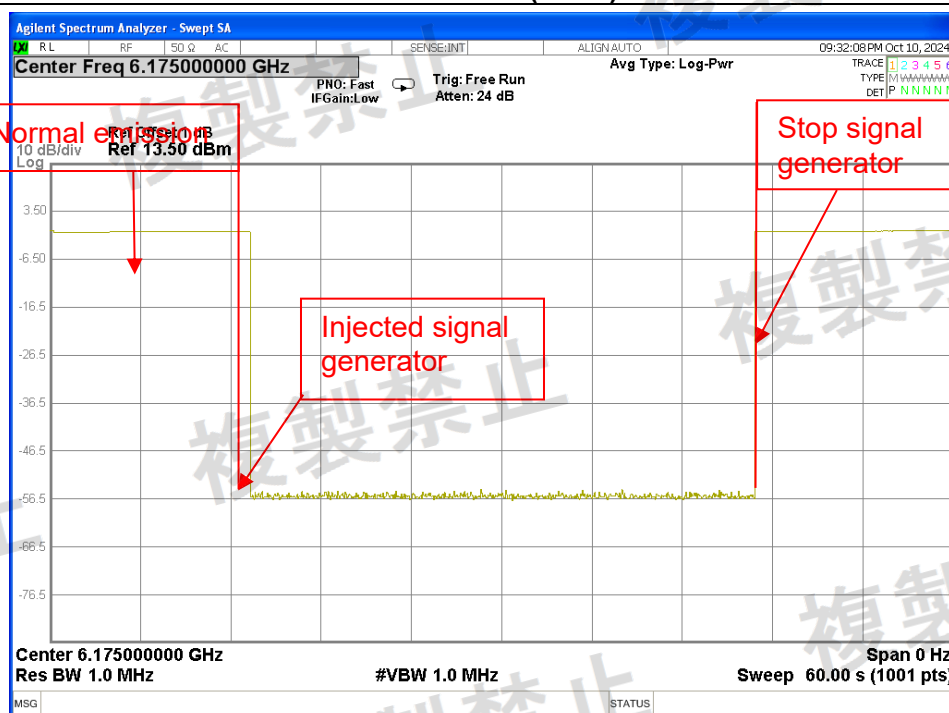


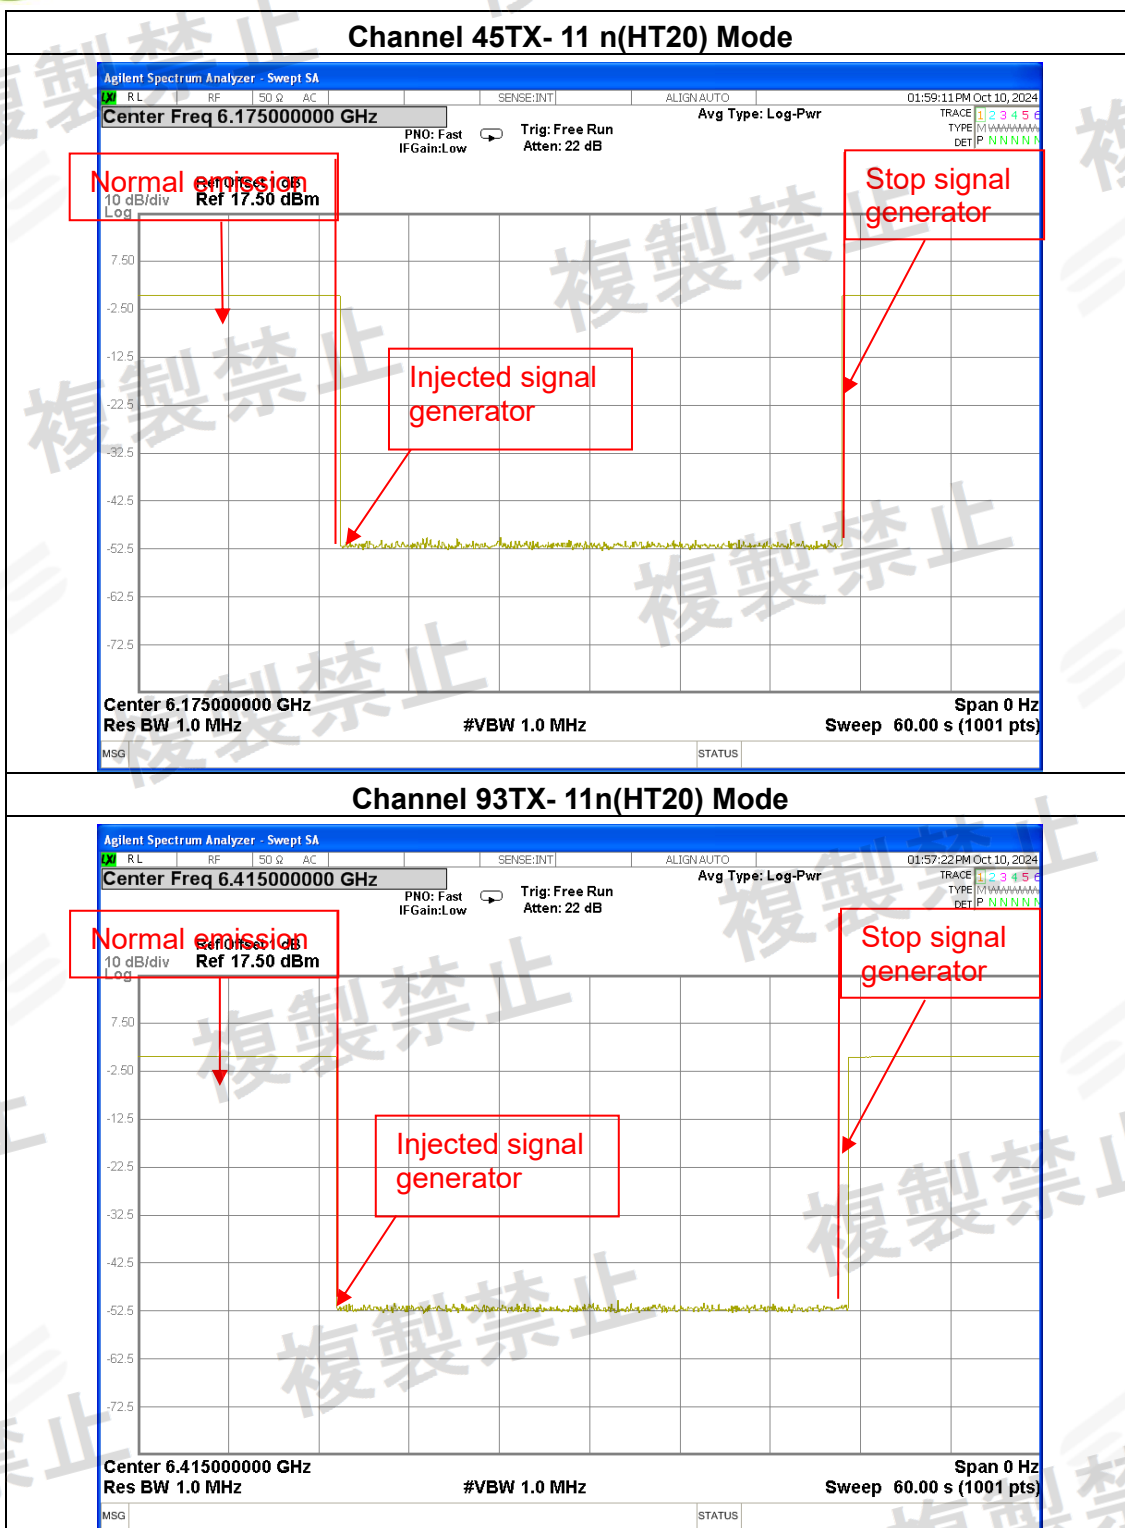


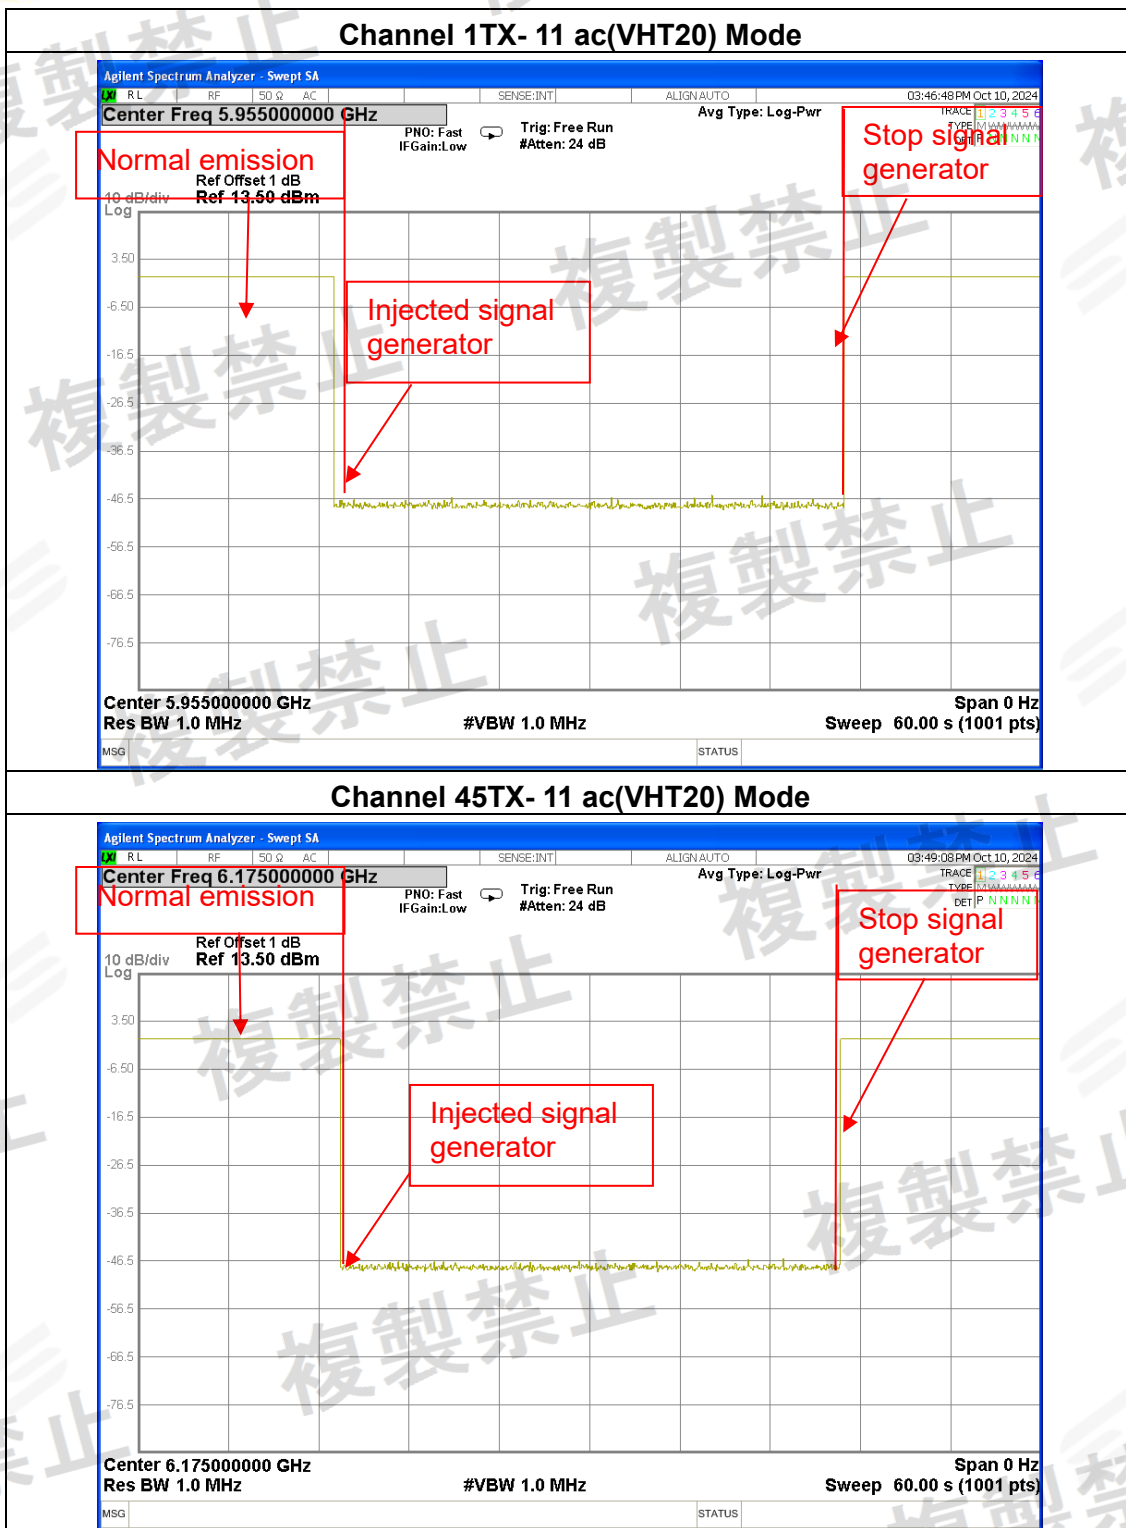

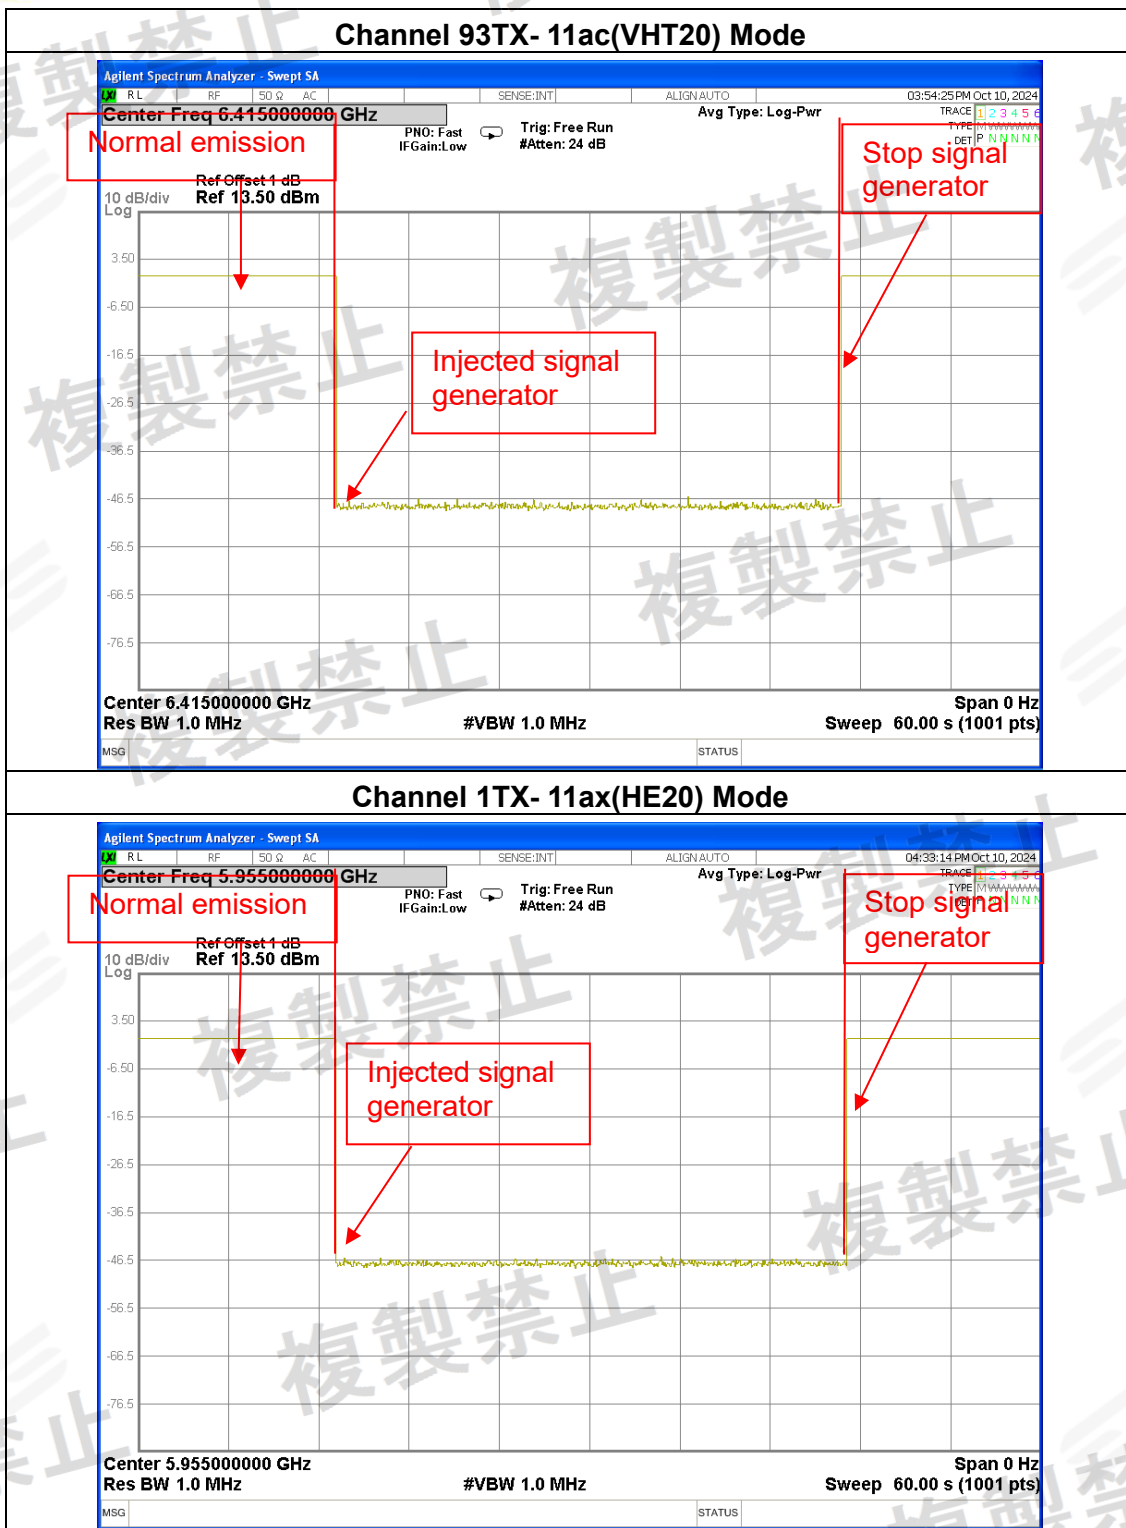

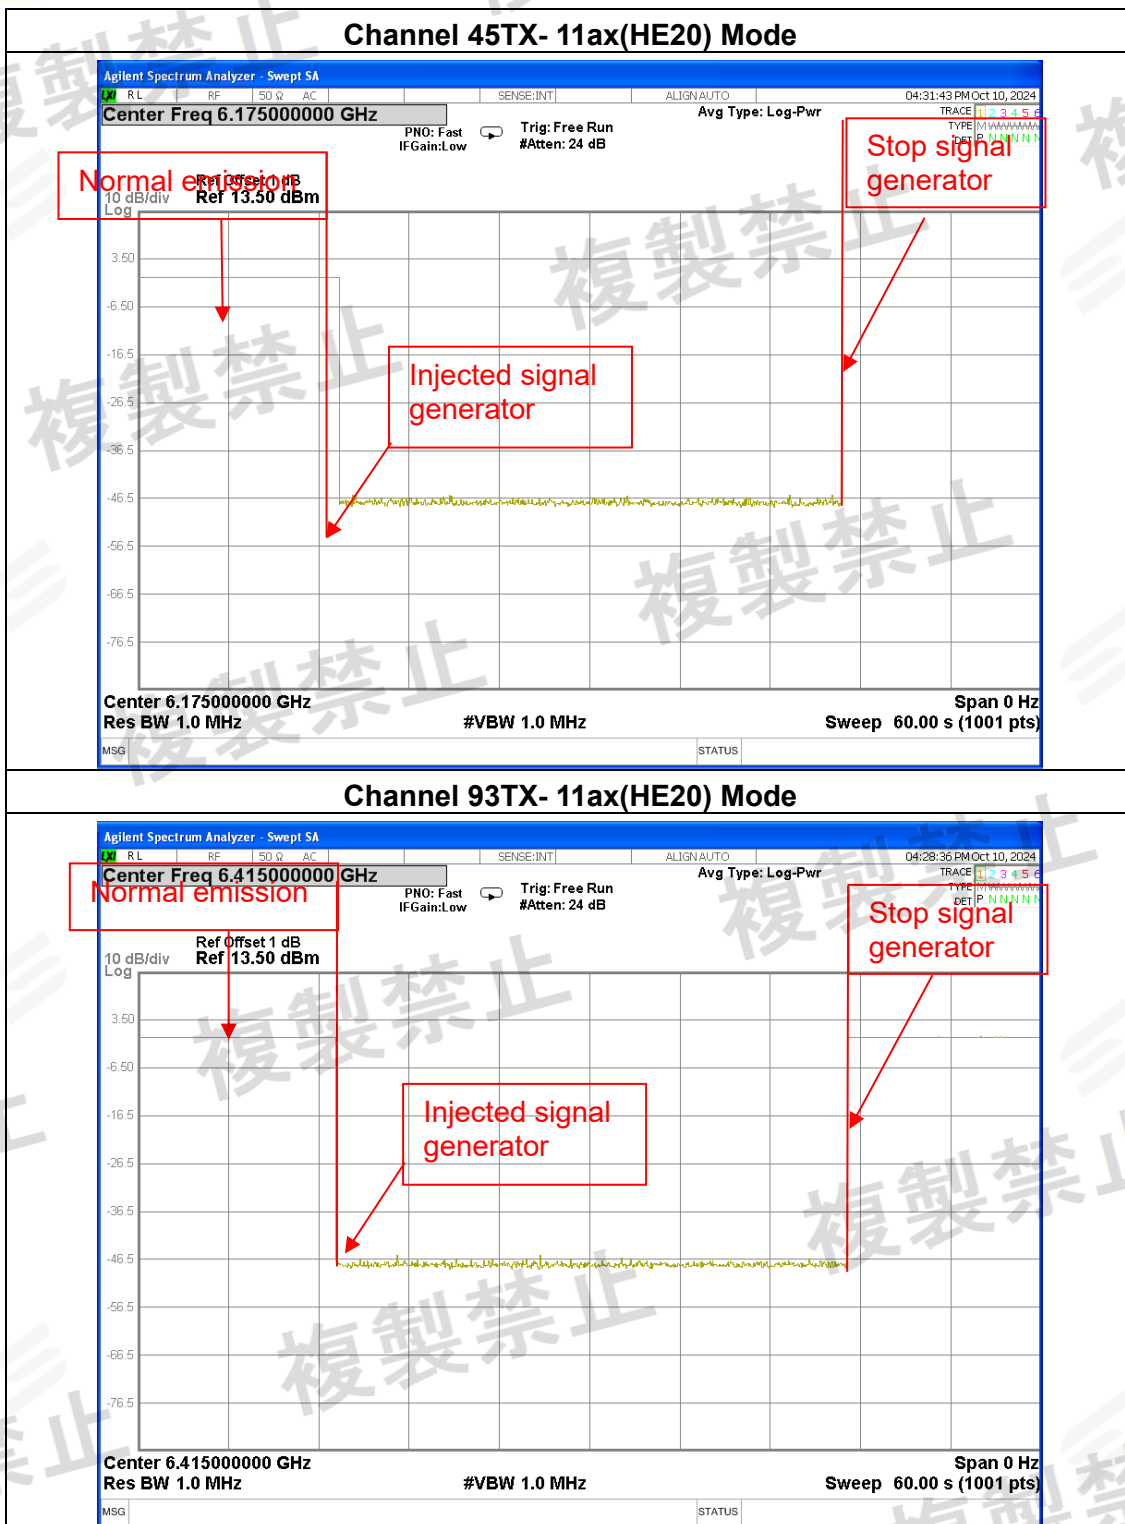


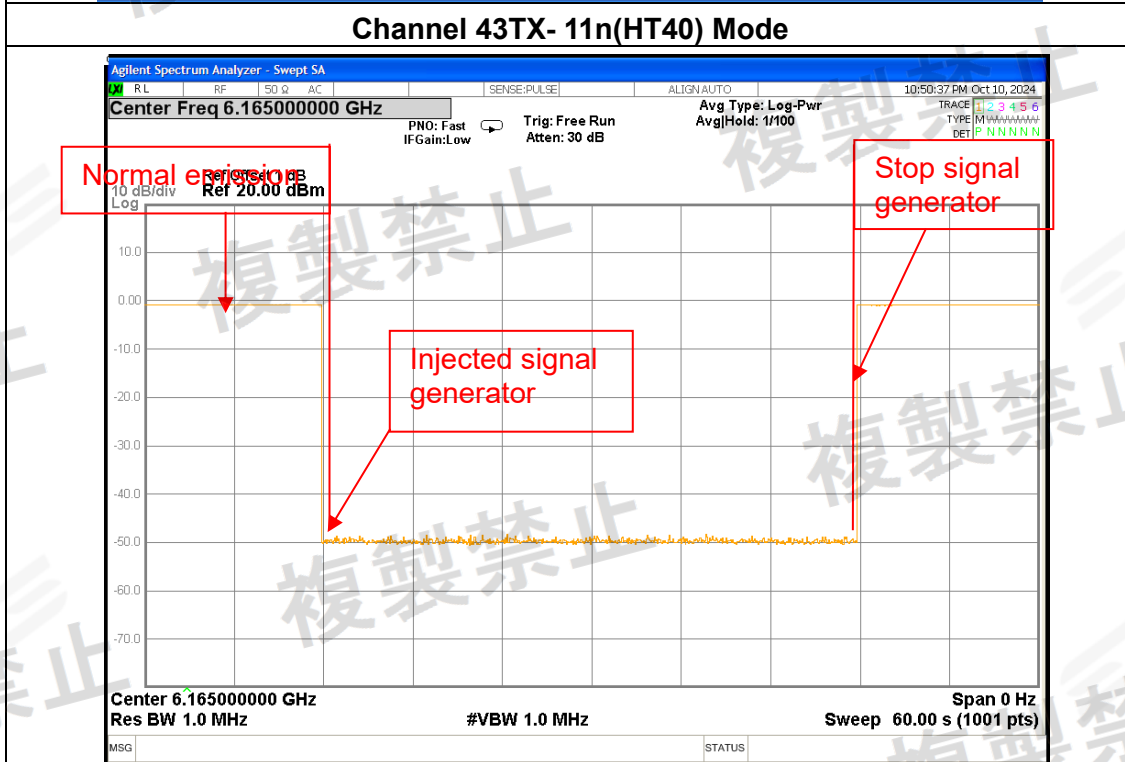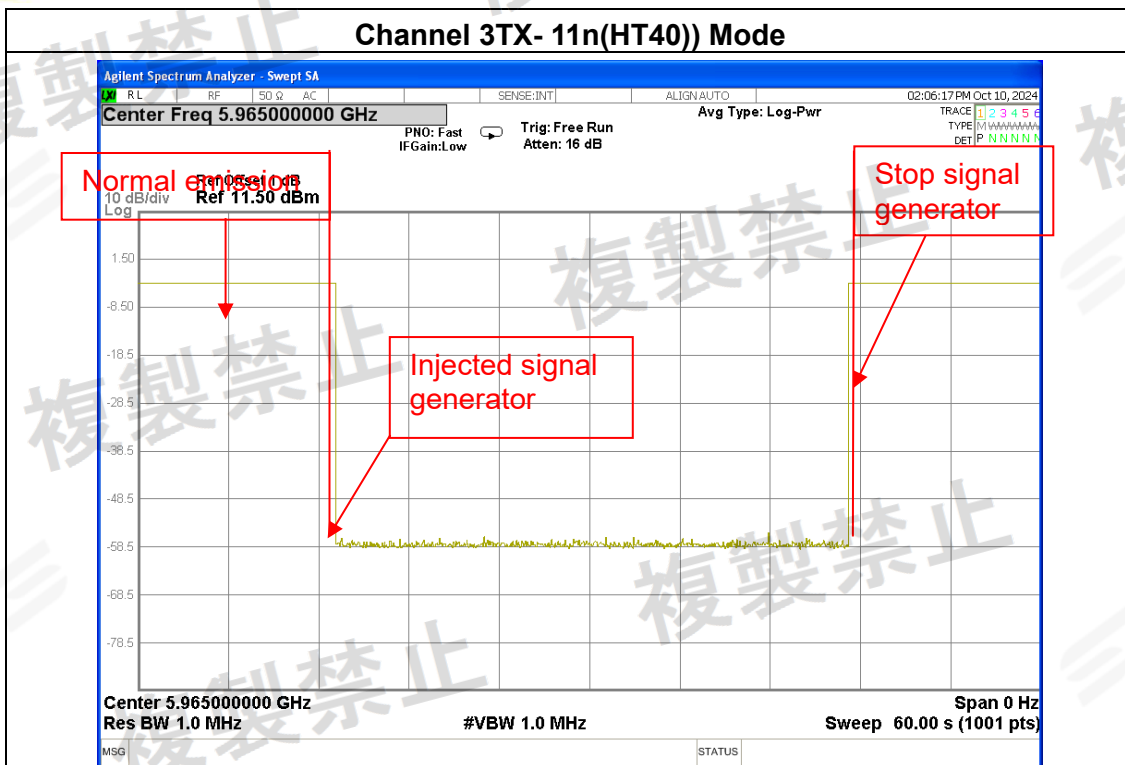

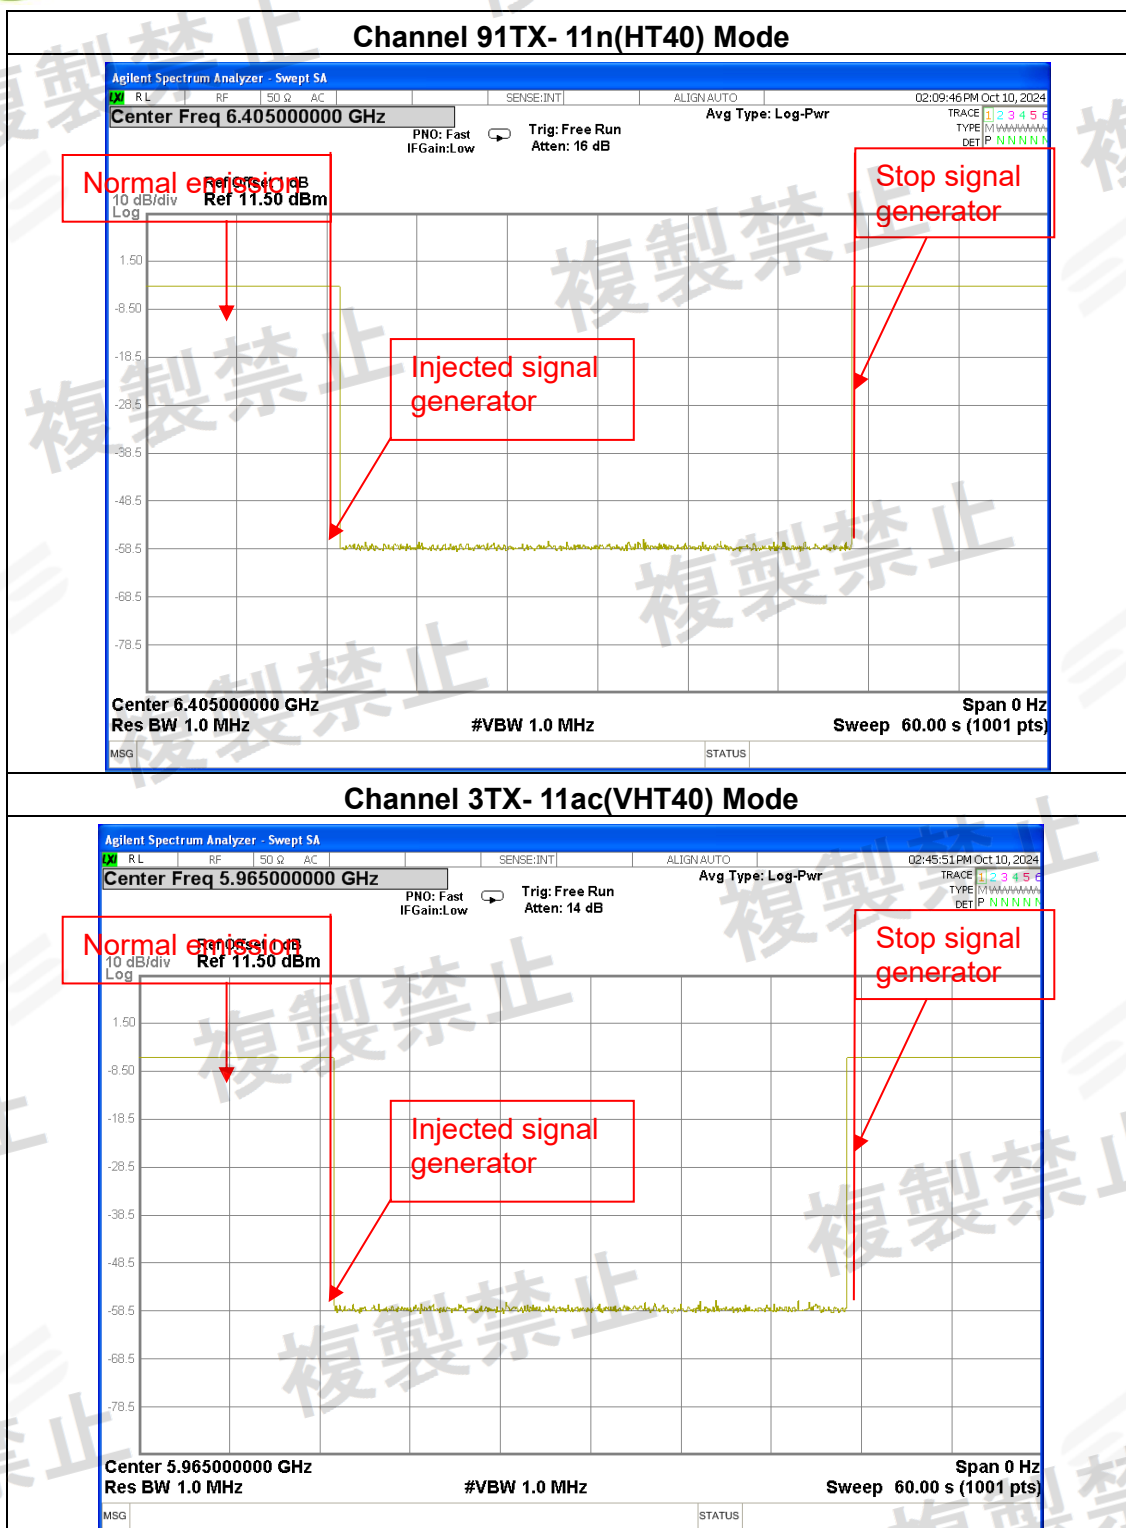








Channel 43TX- 11ac(VHT40) Mode

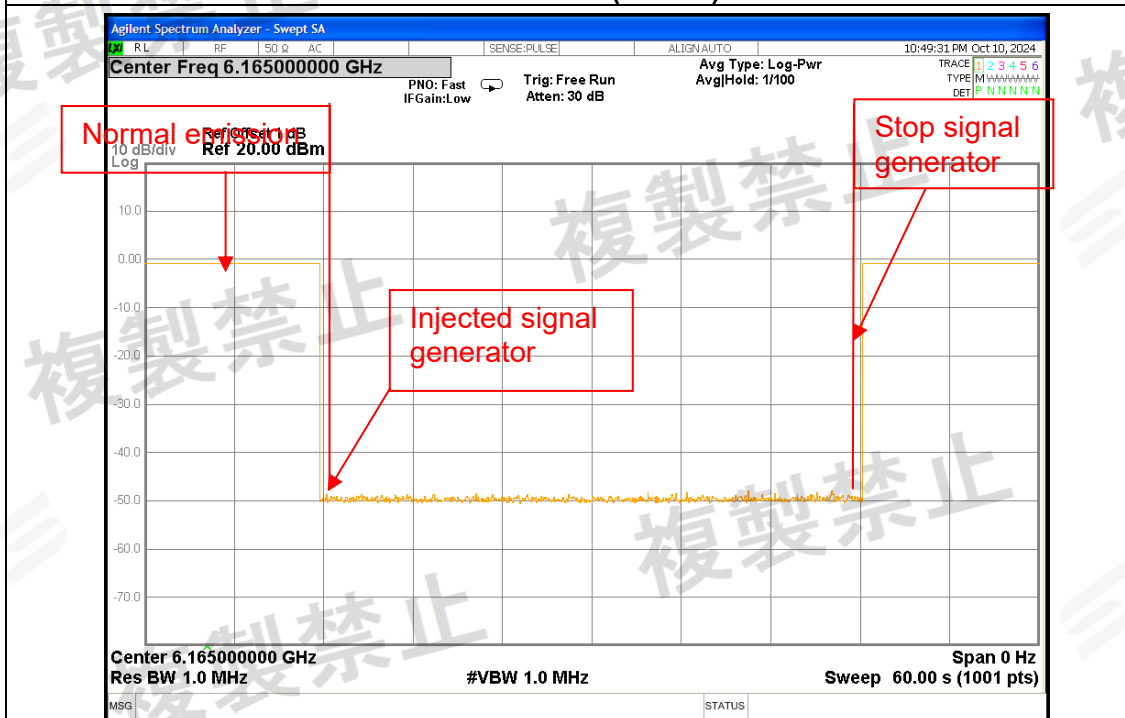



Channel 91TX- 11ac(VHT40) Mode


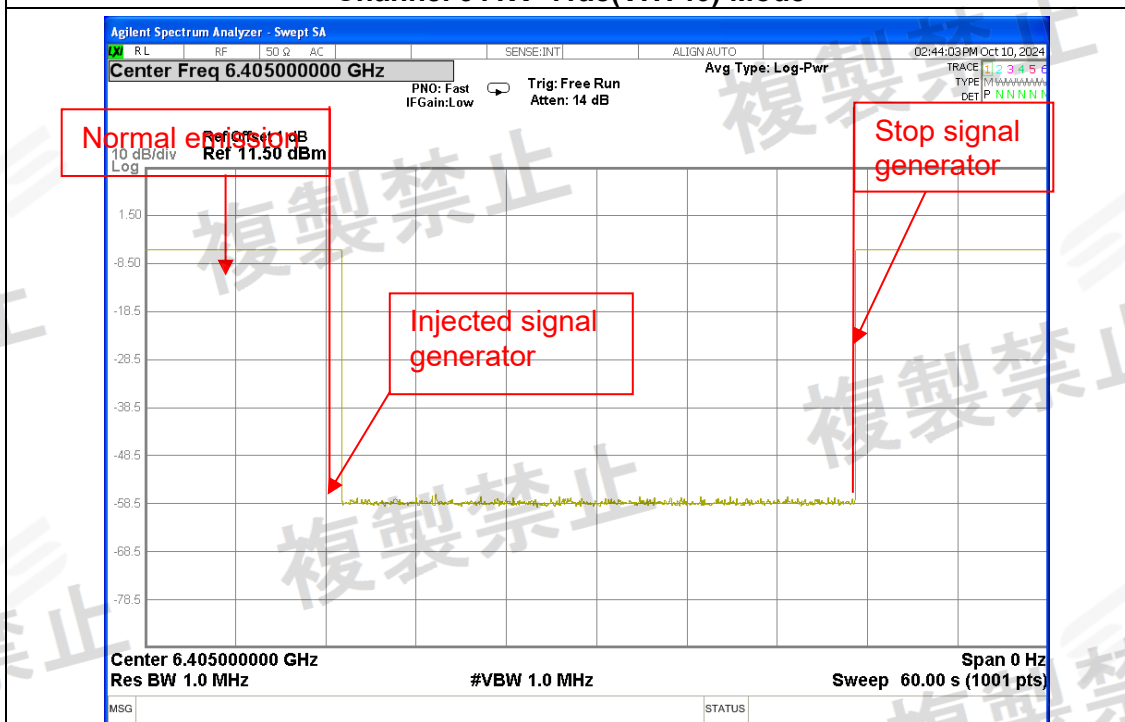


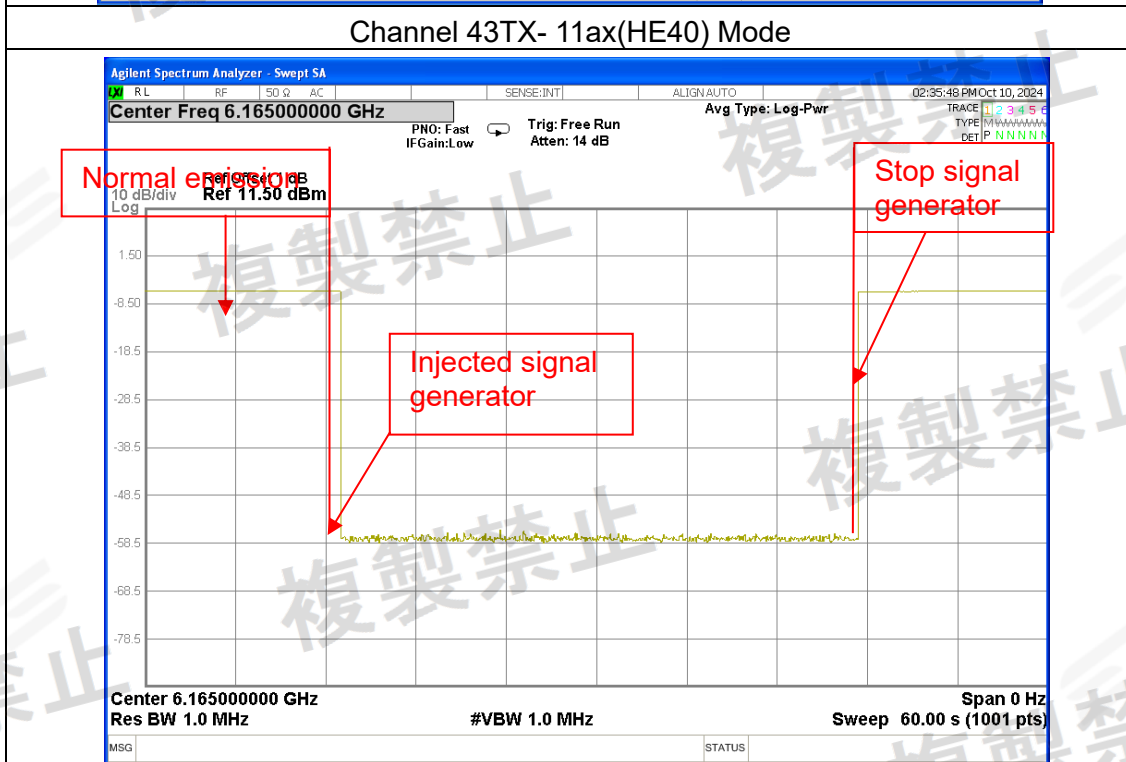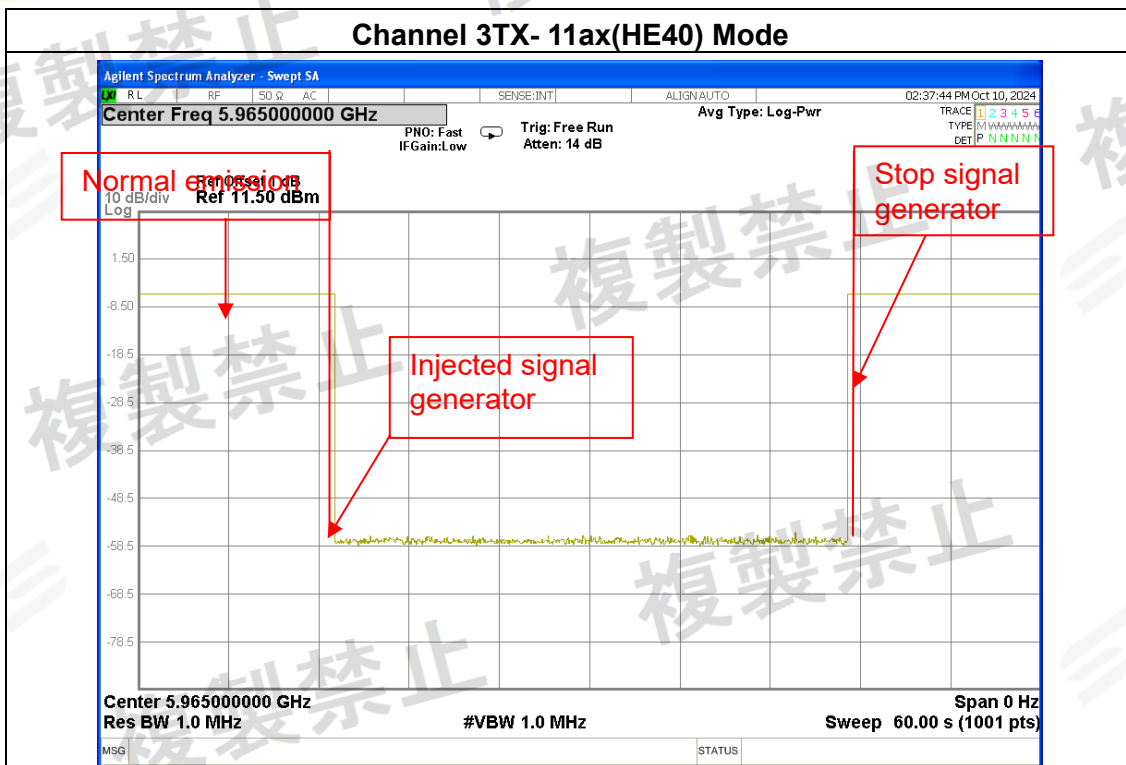

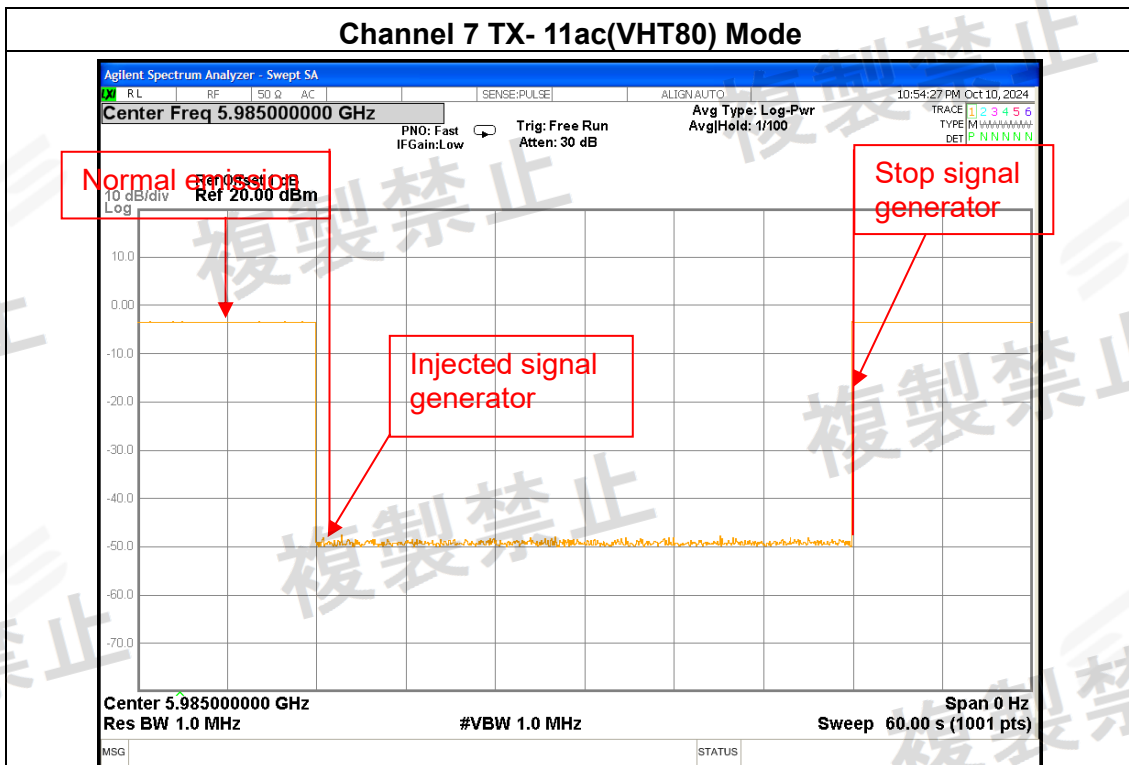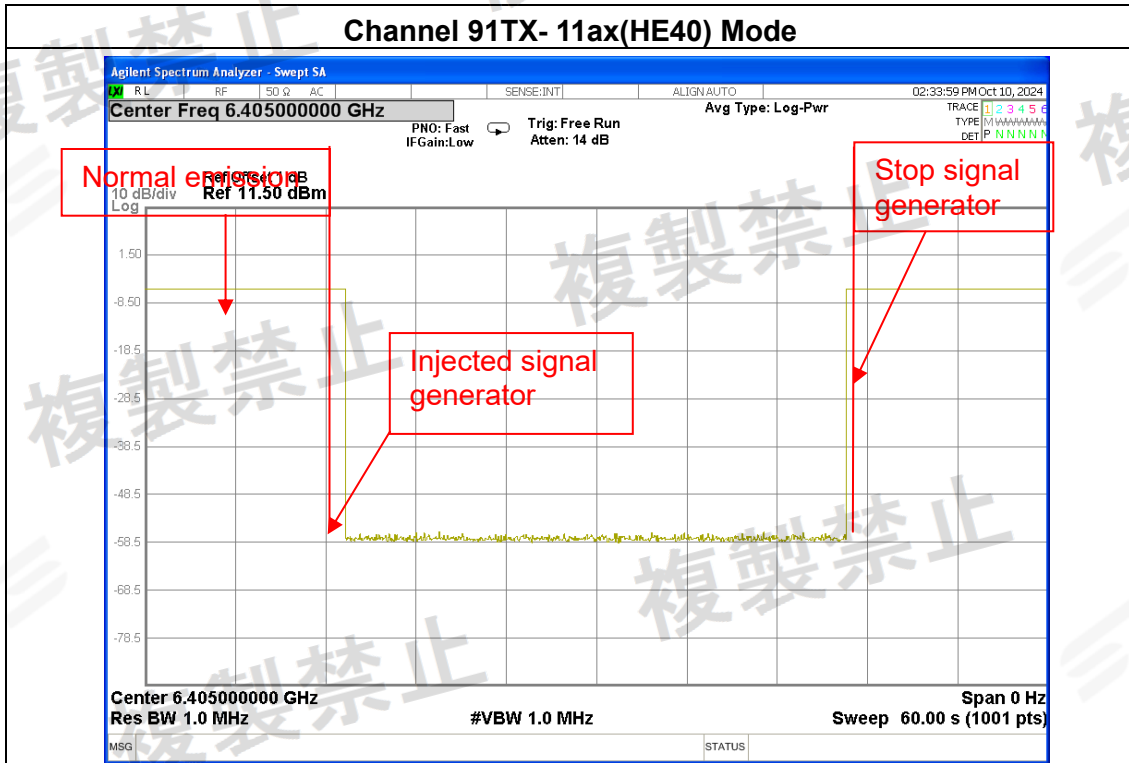

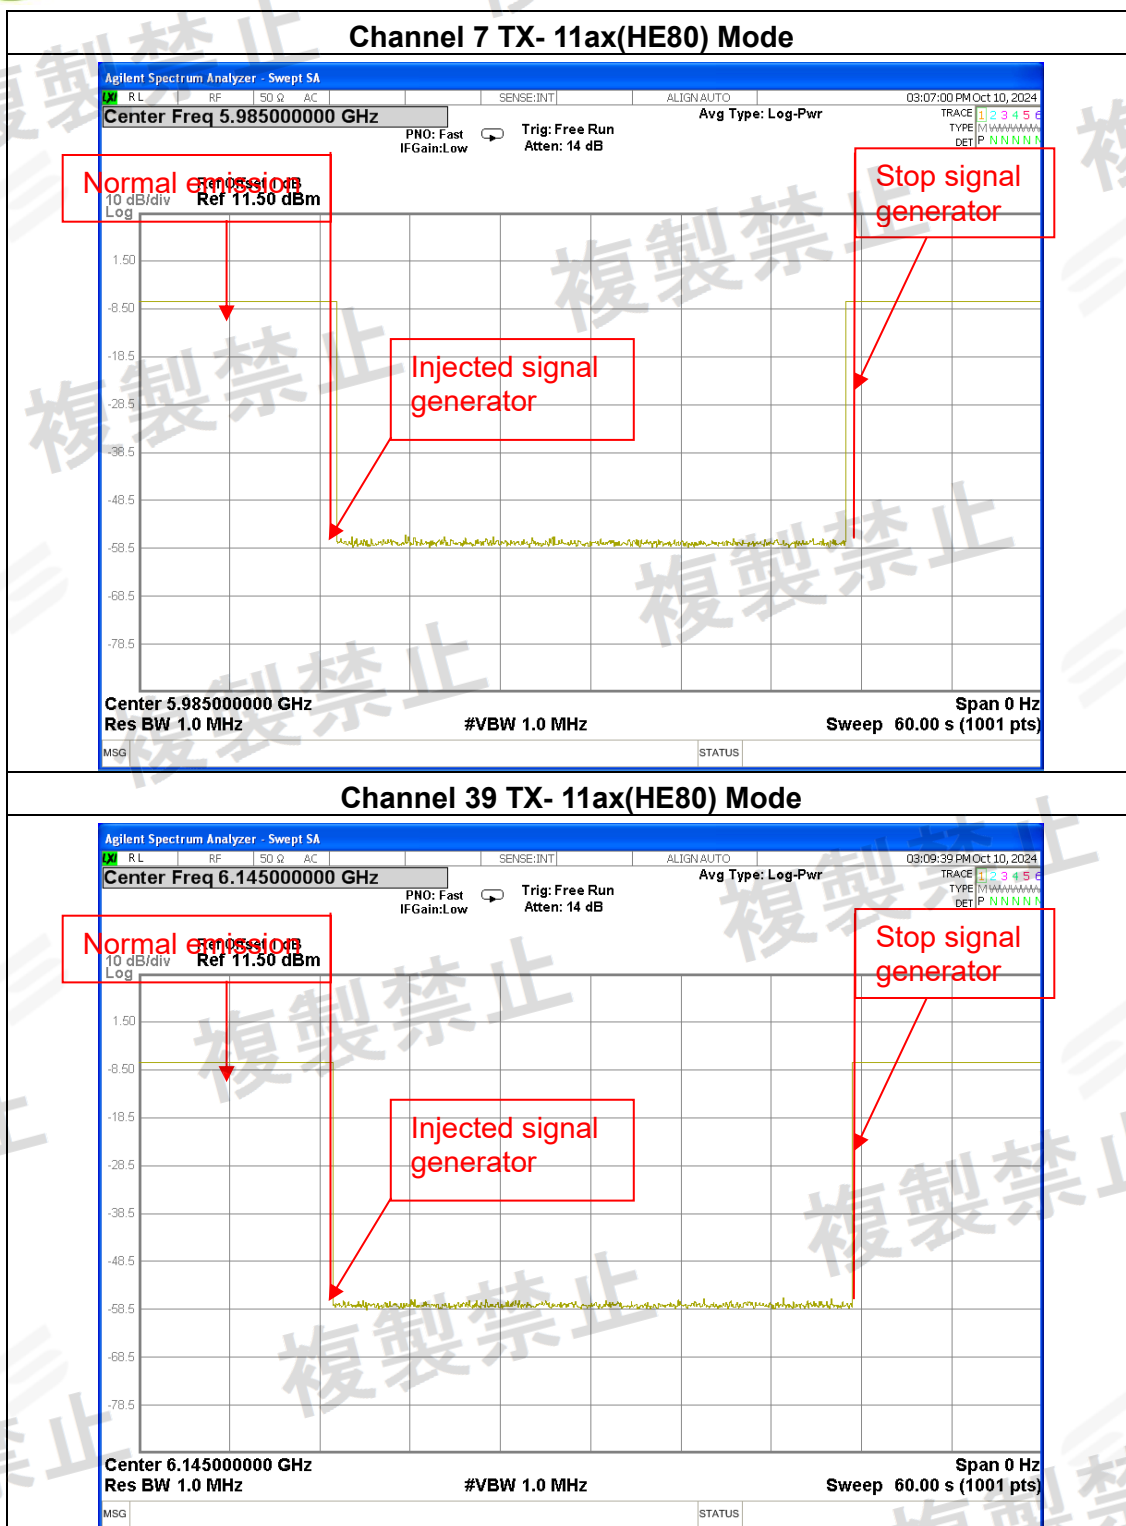


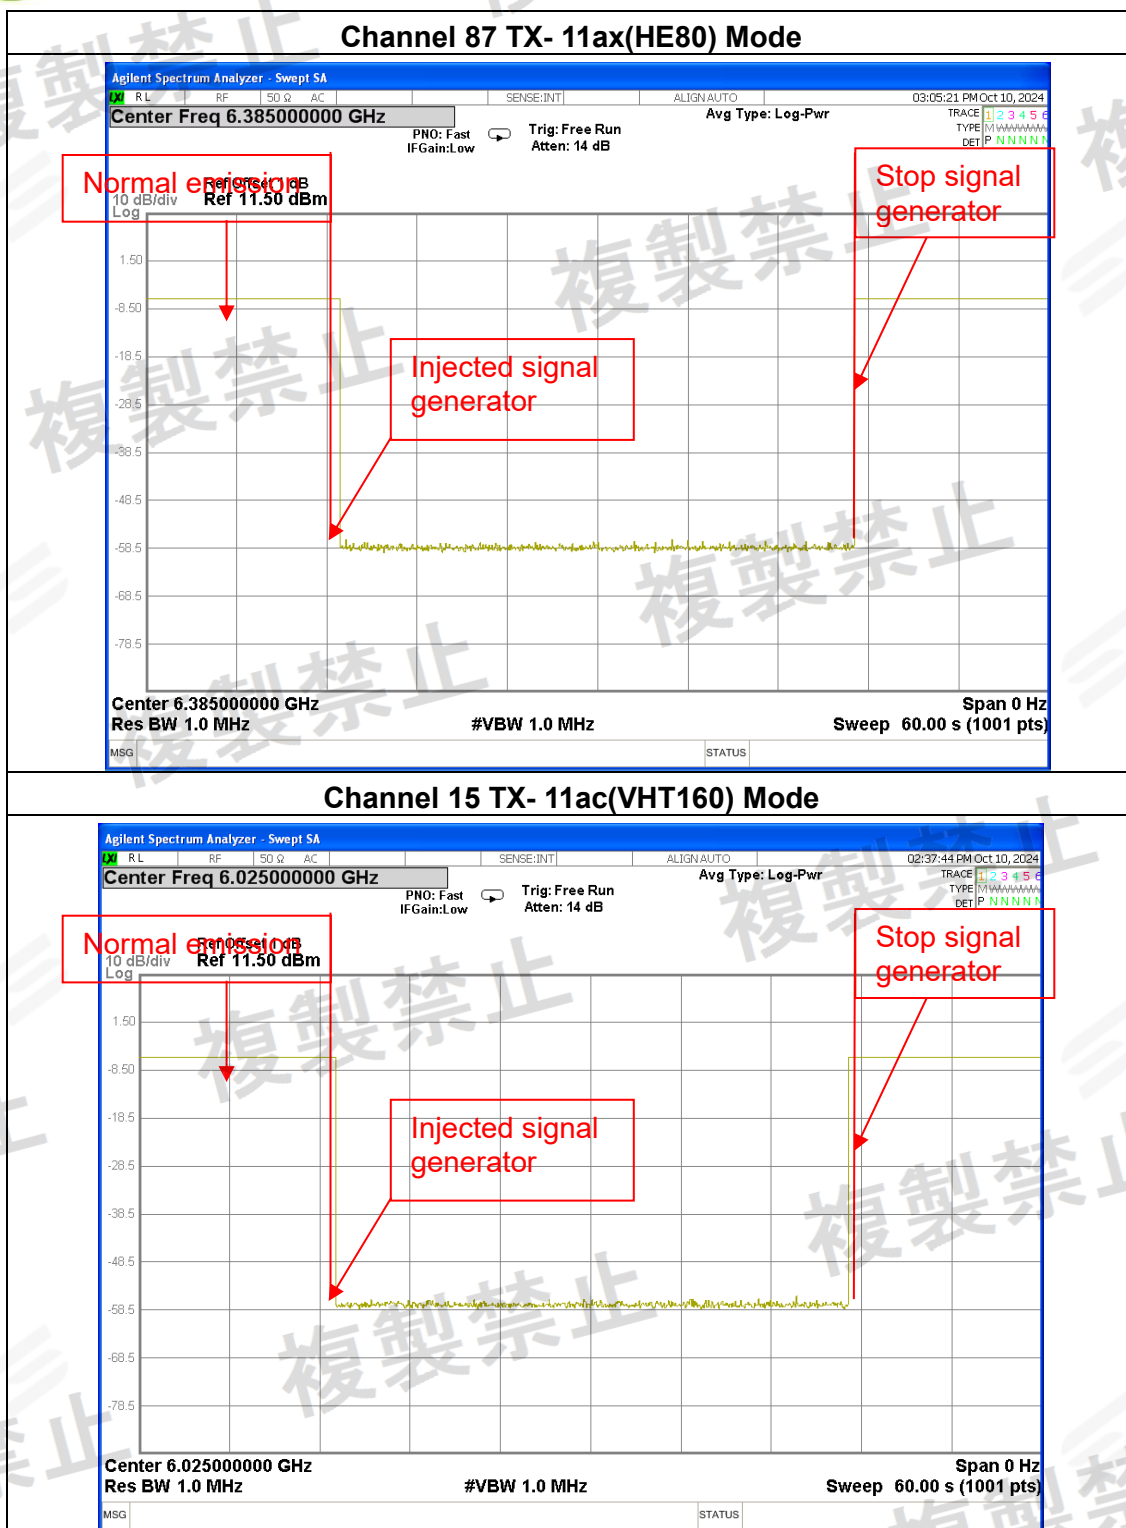

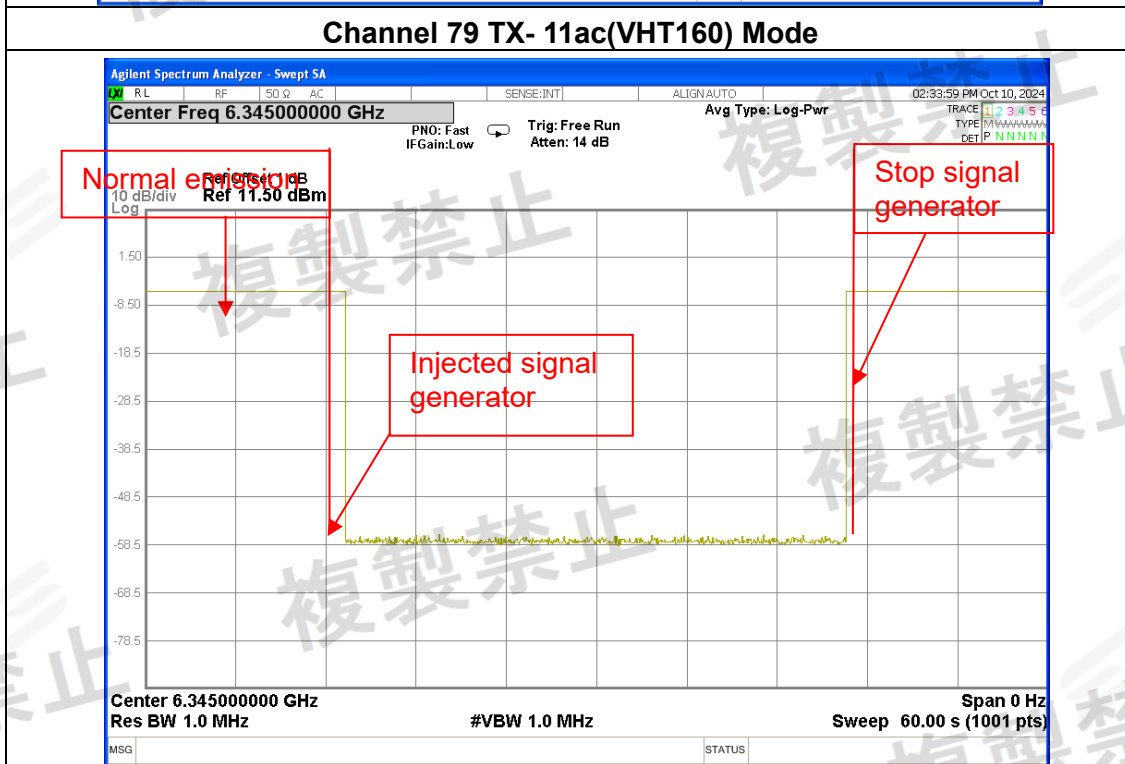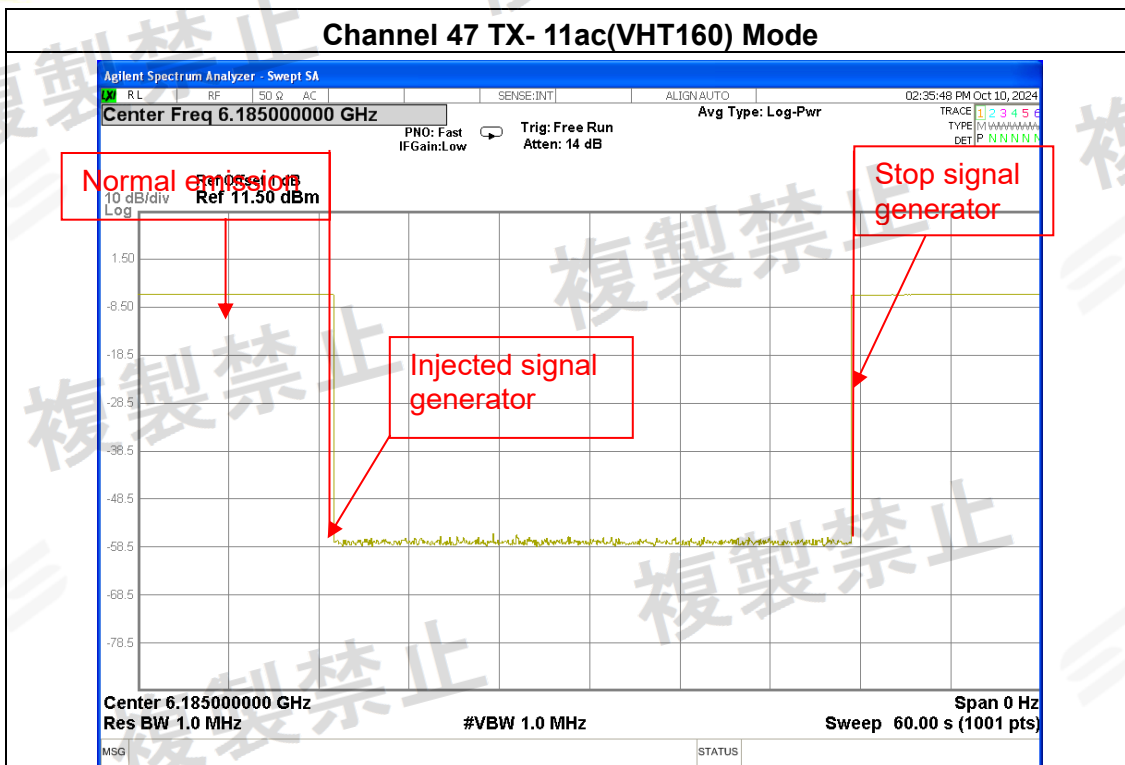





Channel 15 TX- 11ax(HE160) Mode

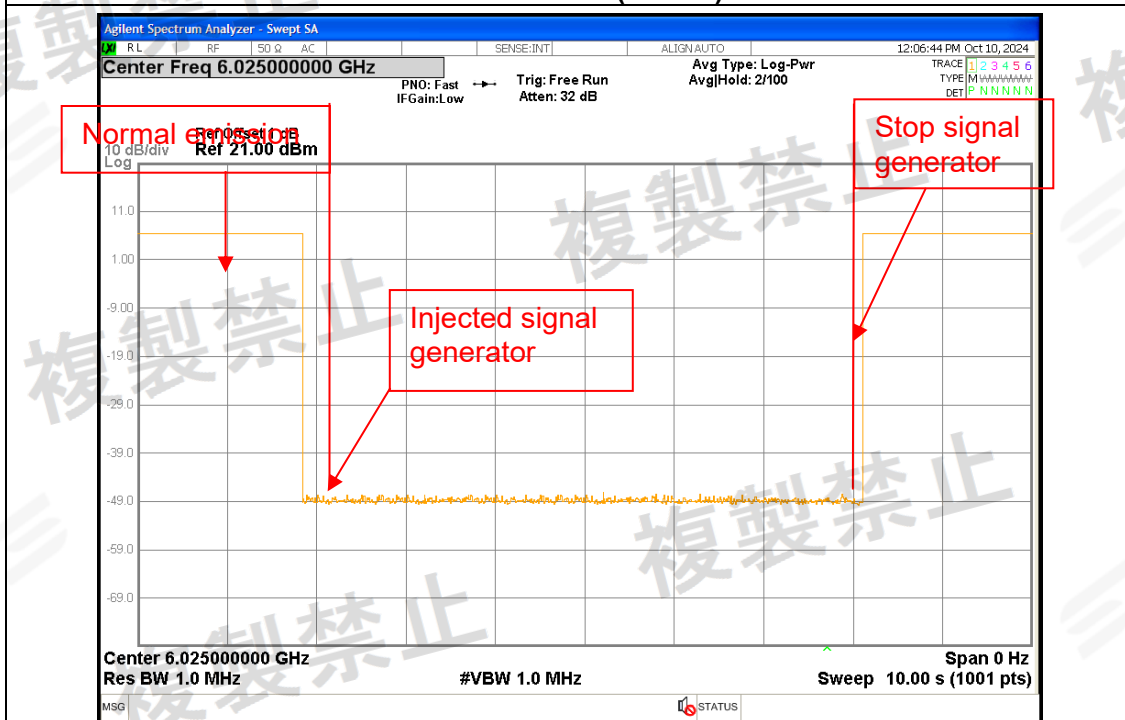

Channel 47 TX- 11ax(HE160) Mode

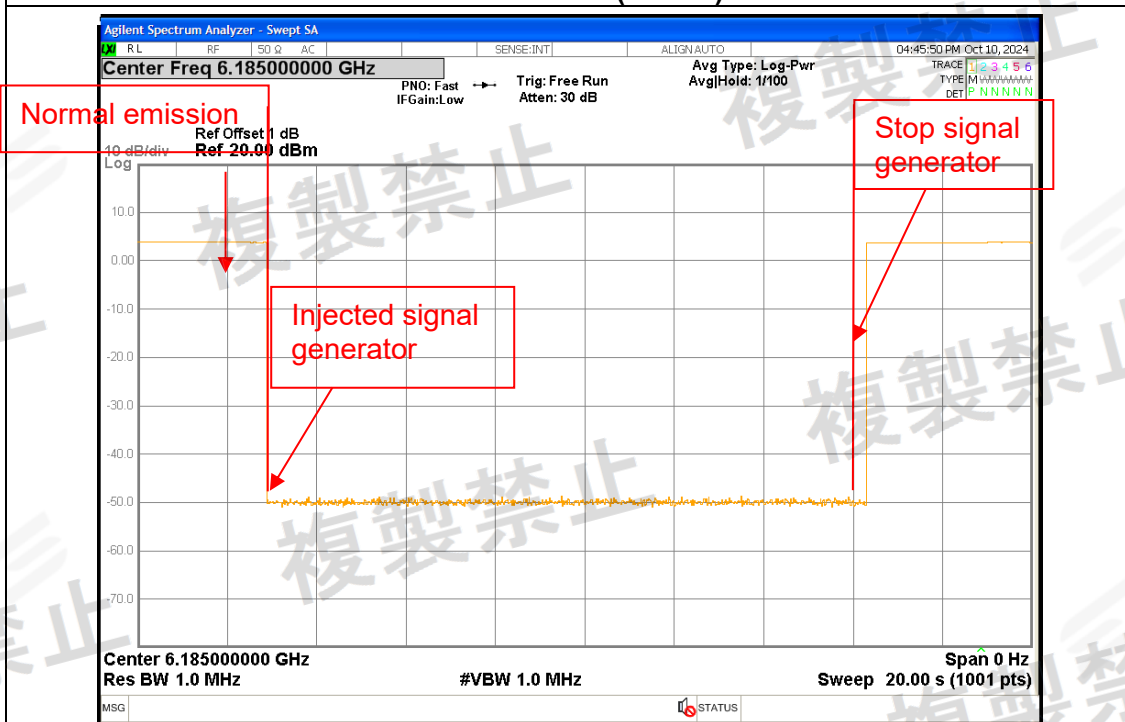


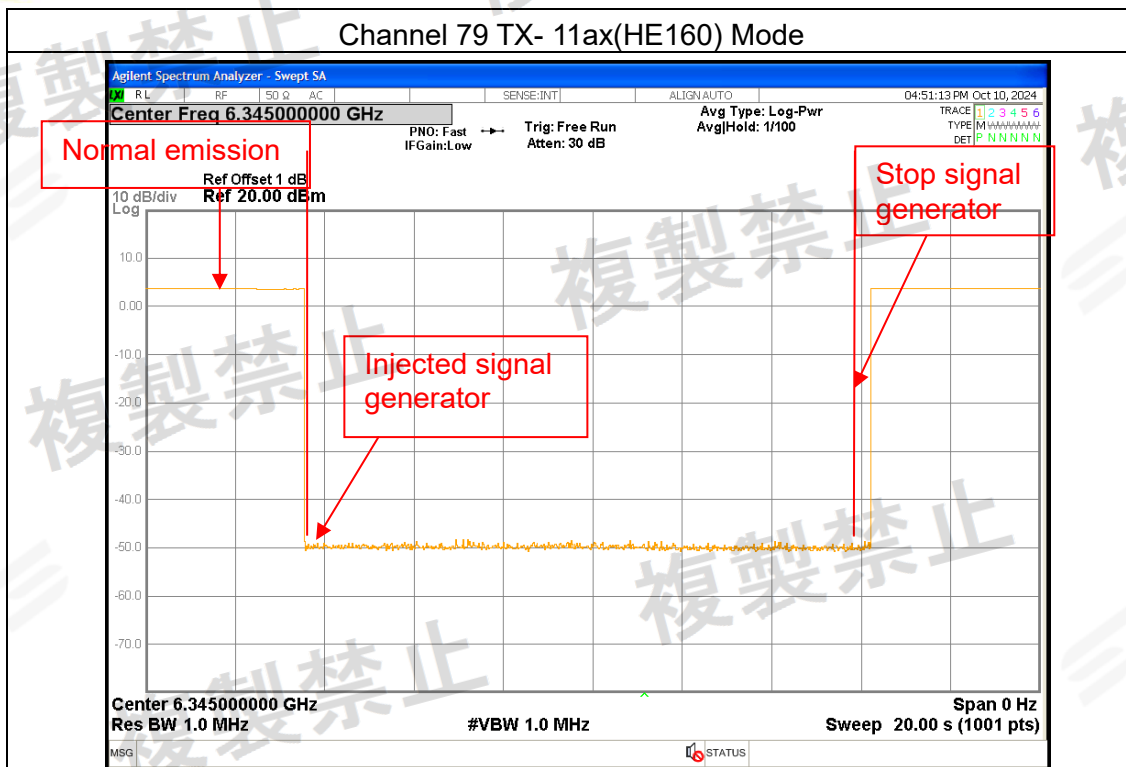





ANT 2


Channel 1TX- 11 a(HT20) Mode

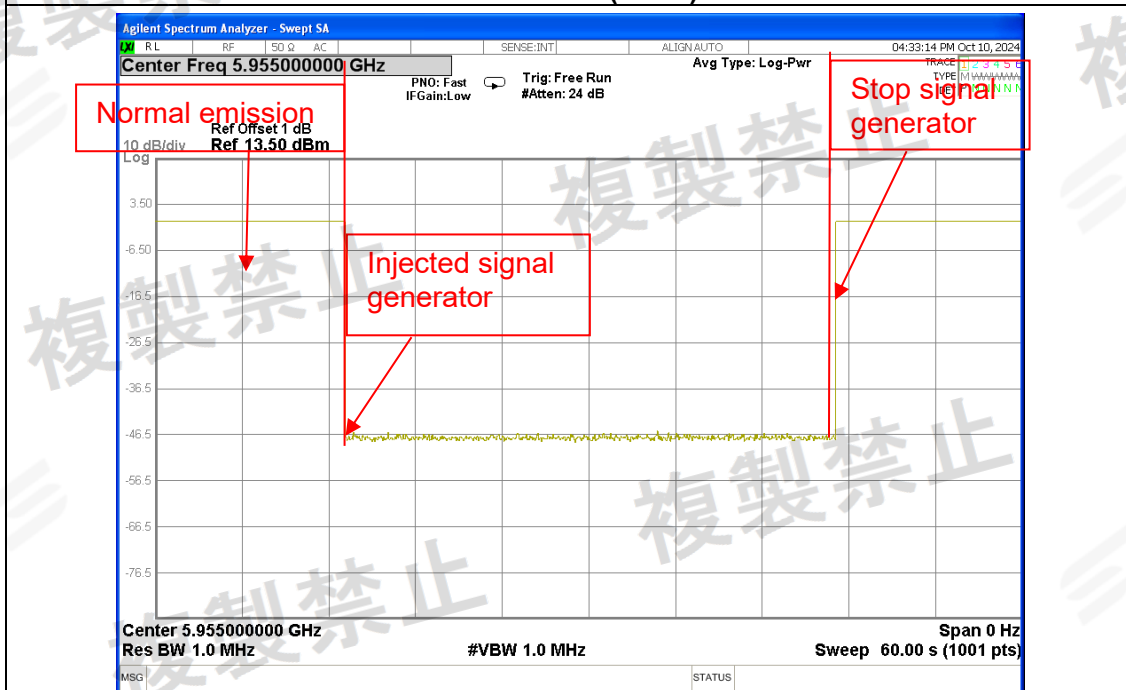


Channel 45TX- 11 a(HT20) Mode

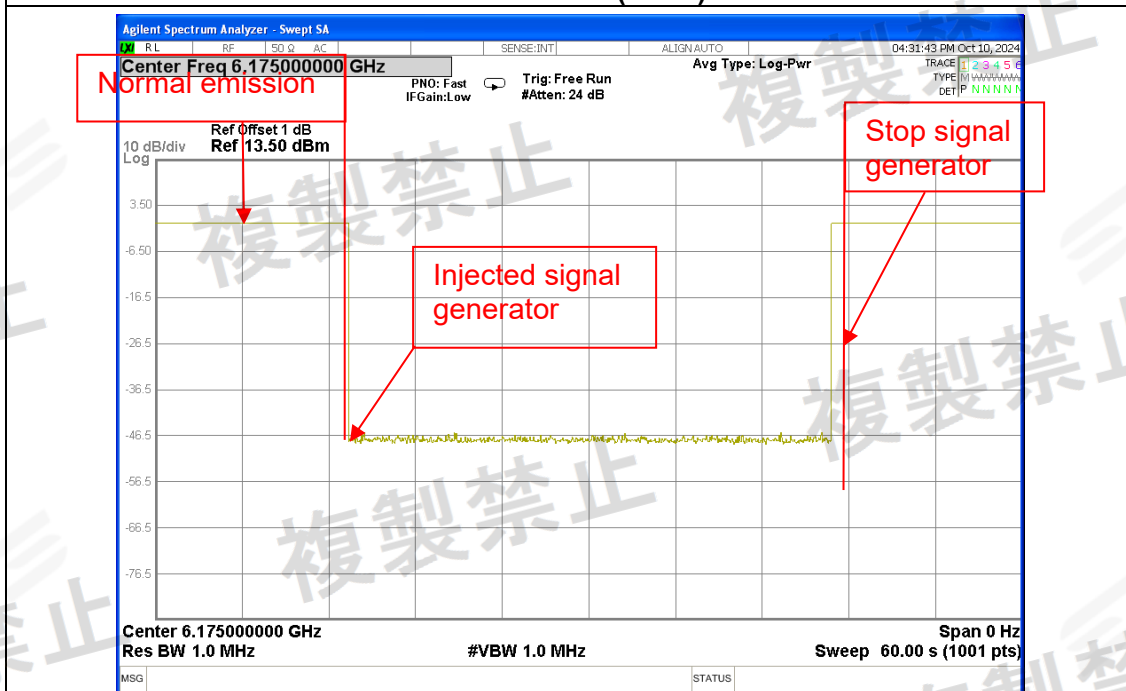

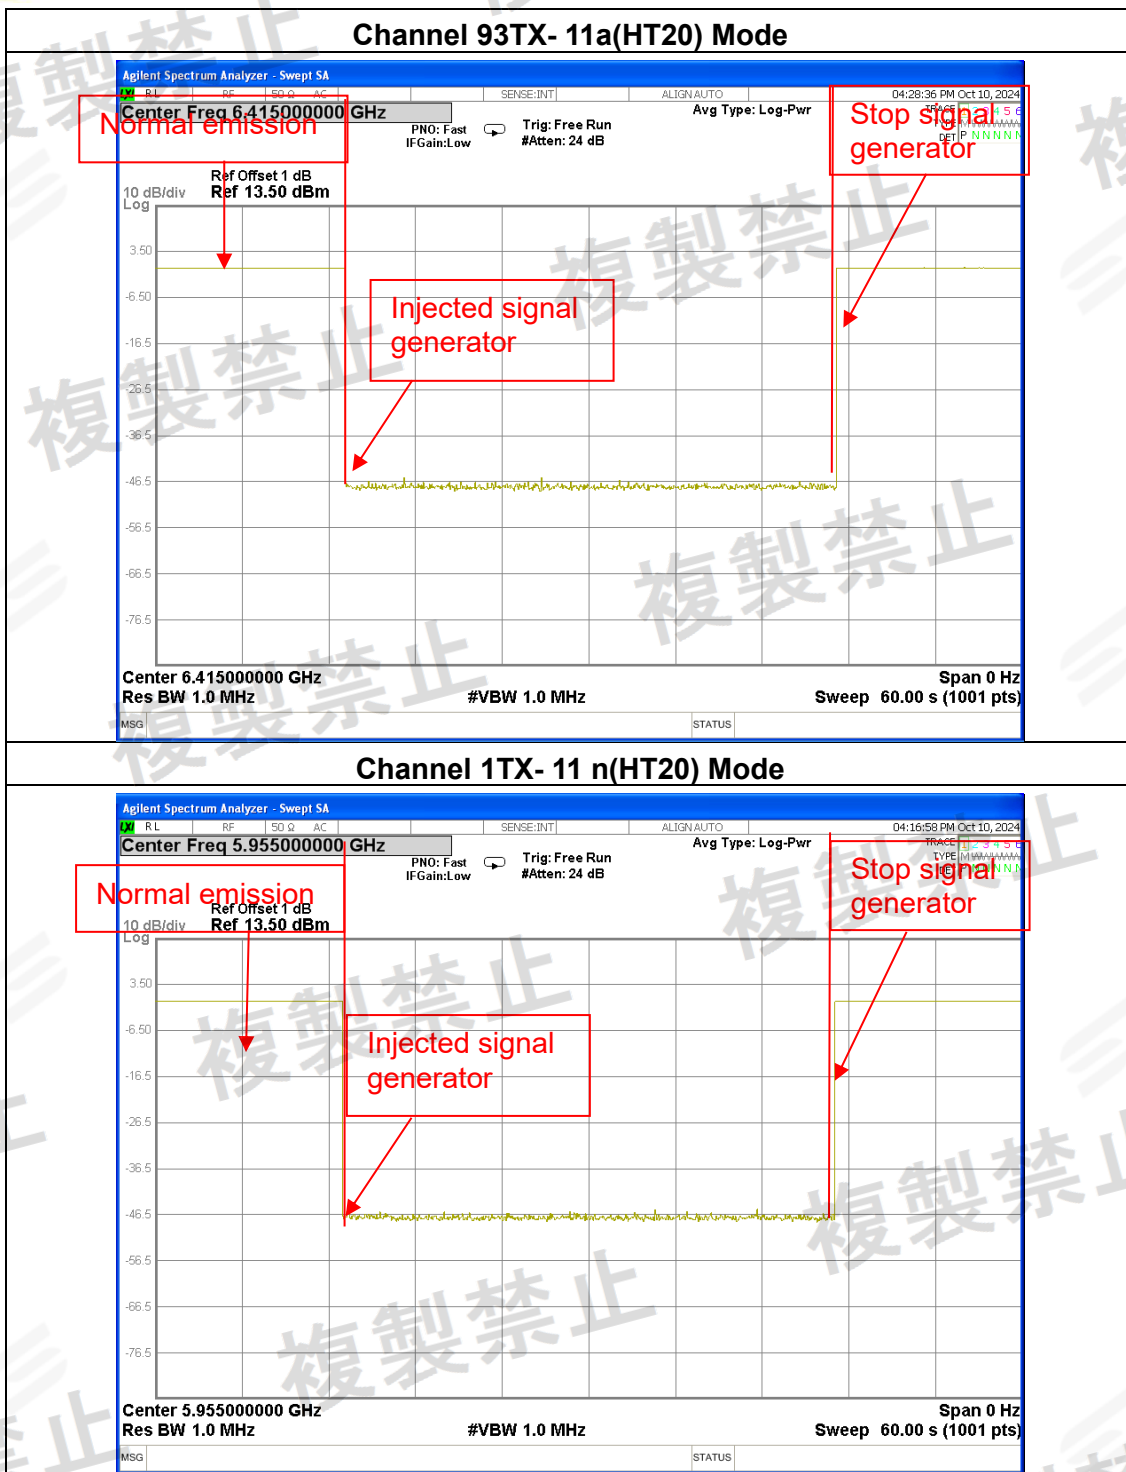


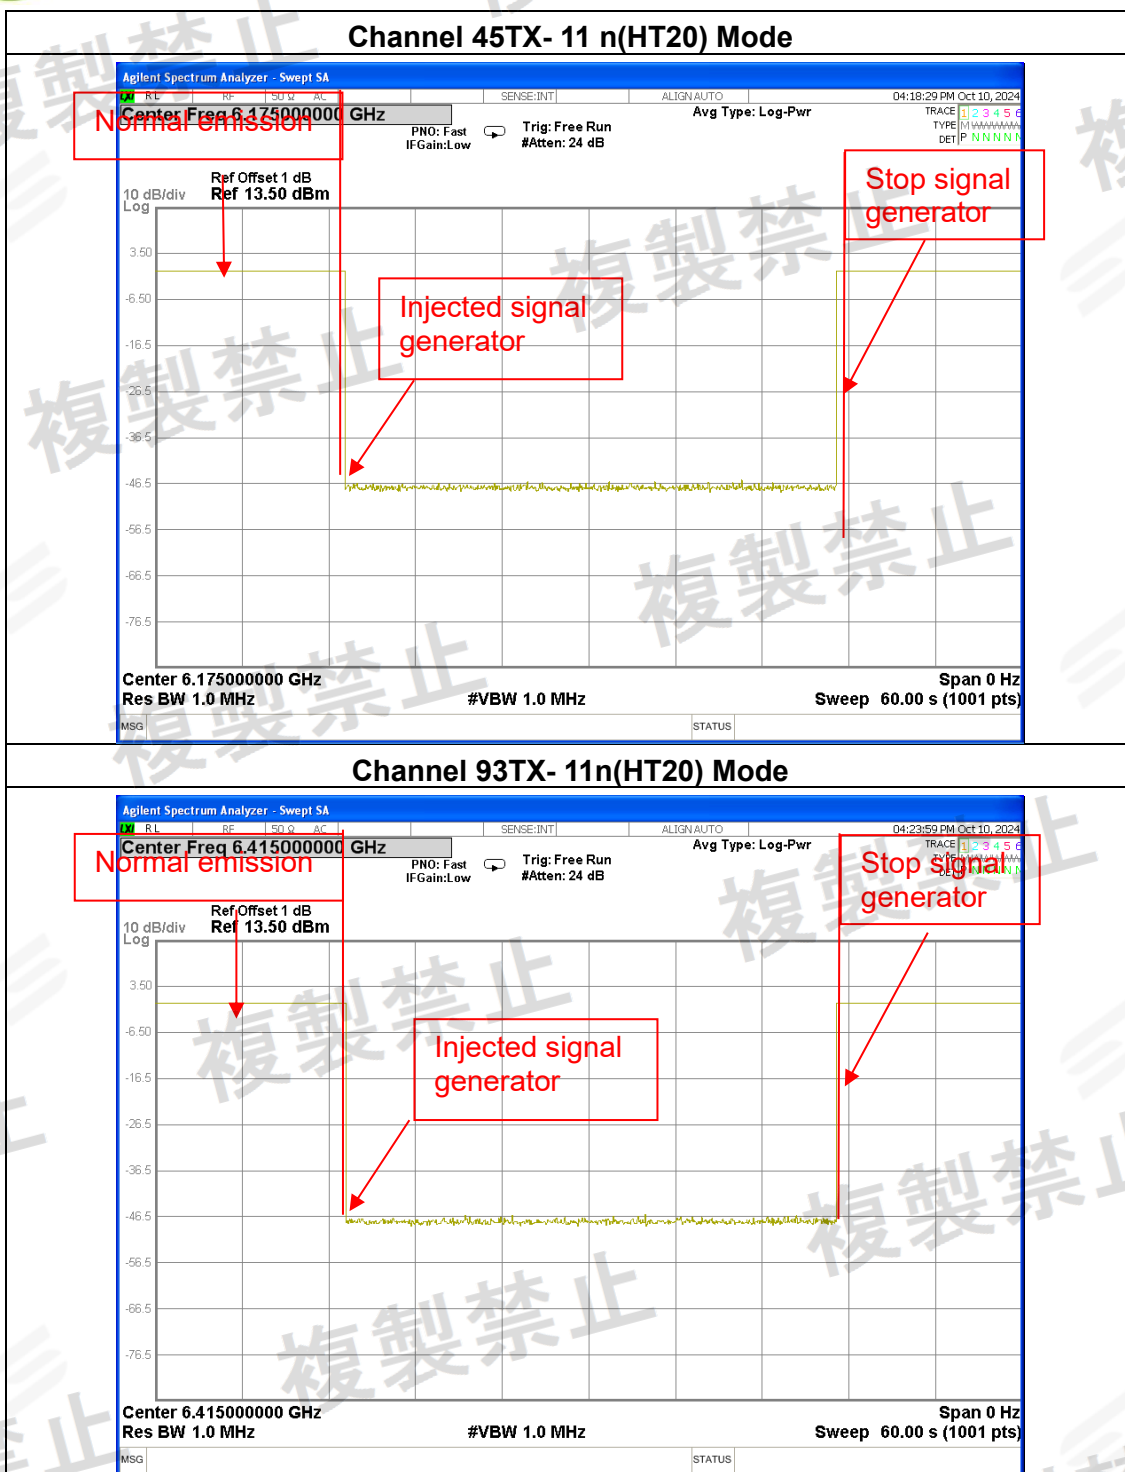

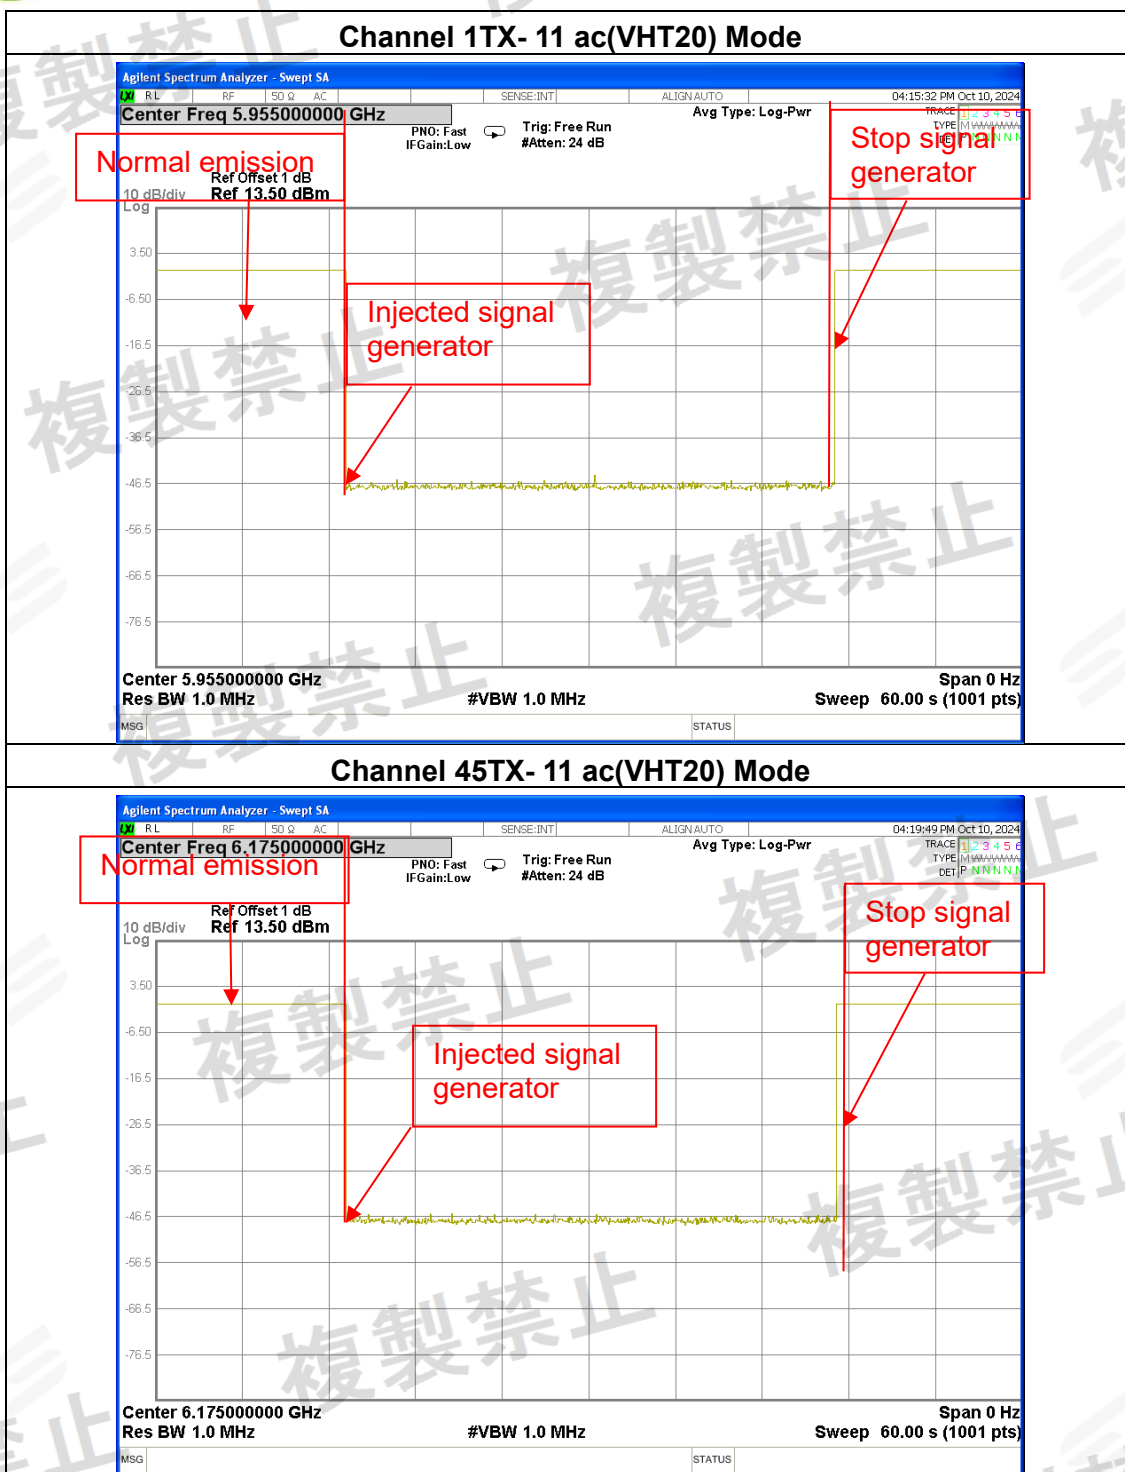




Channel 93TX- 11ac(VHT20) Mode

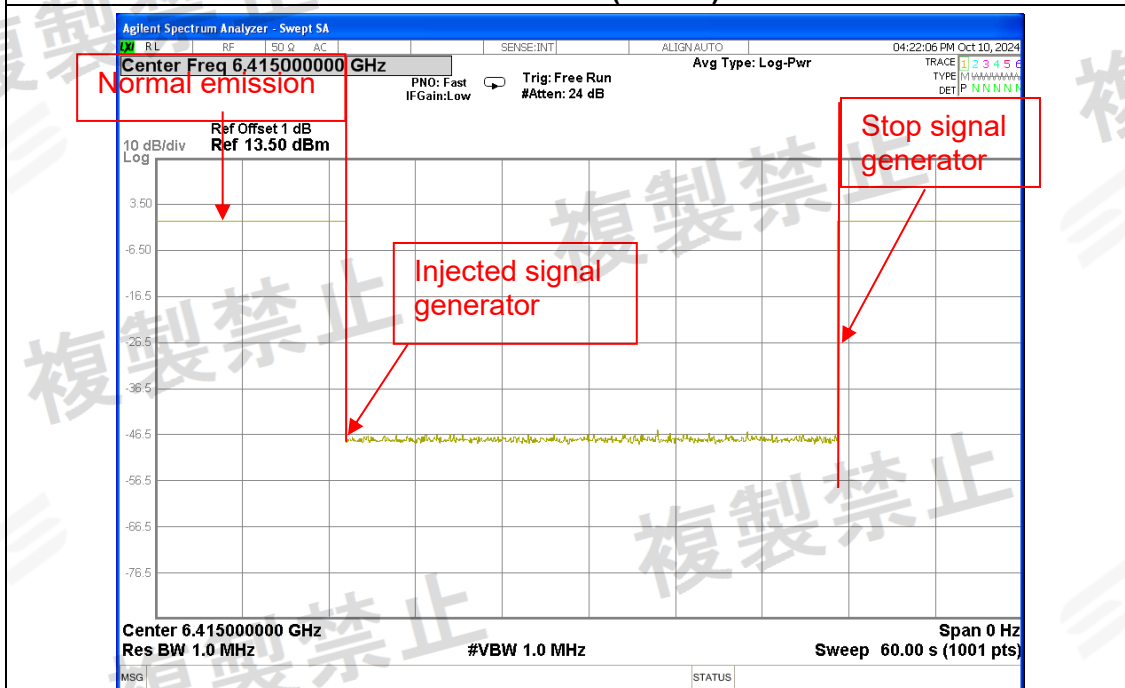


Channel 1TX- 11ax(HE20) Mode

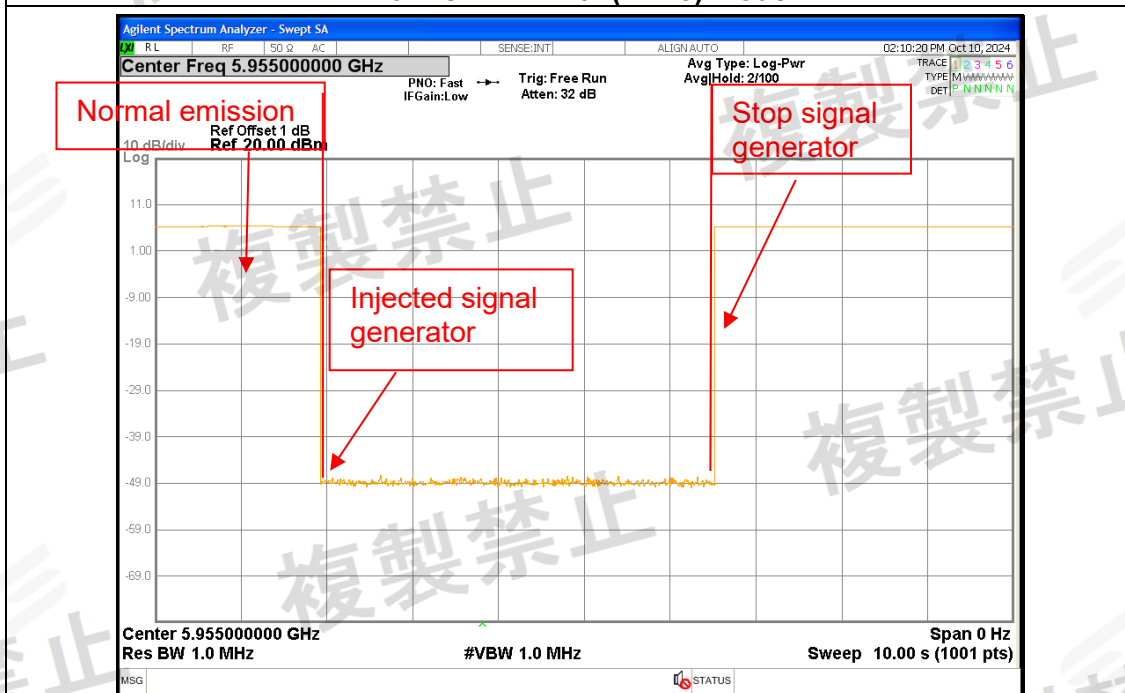






Channel 45TX- 11ax(HE20) Mode

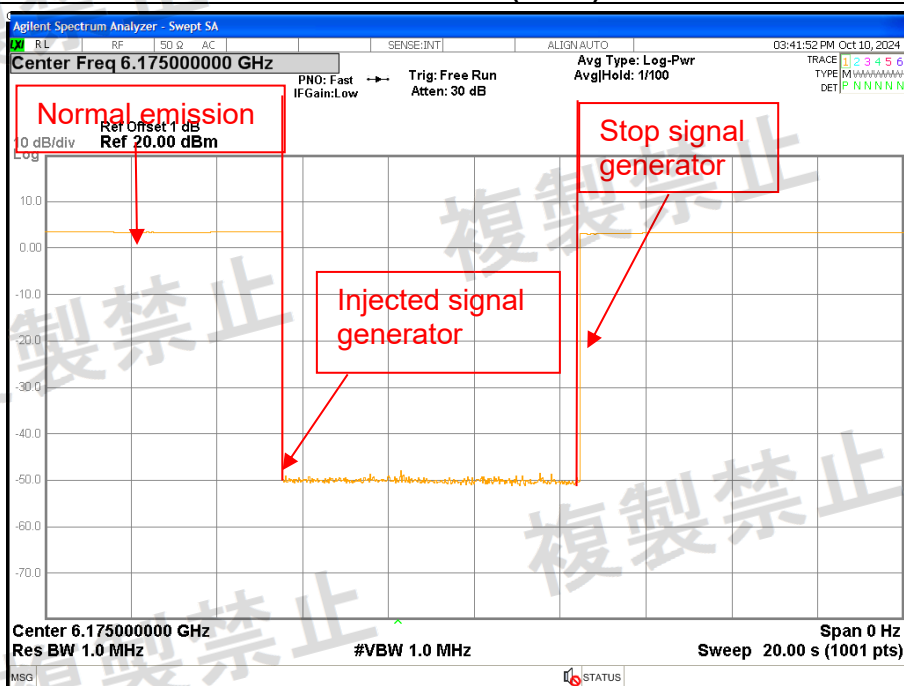



Channel 93TX- 11ax(HE20) Mode


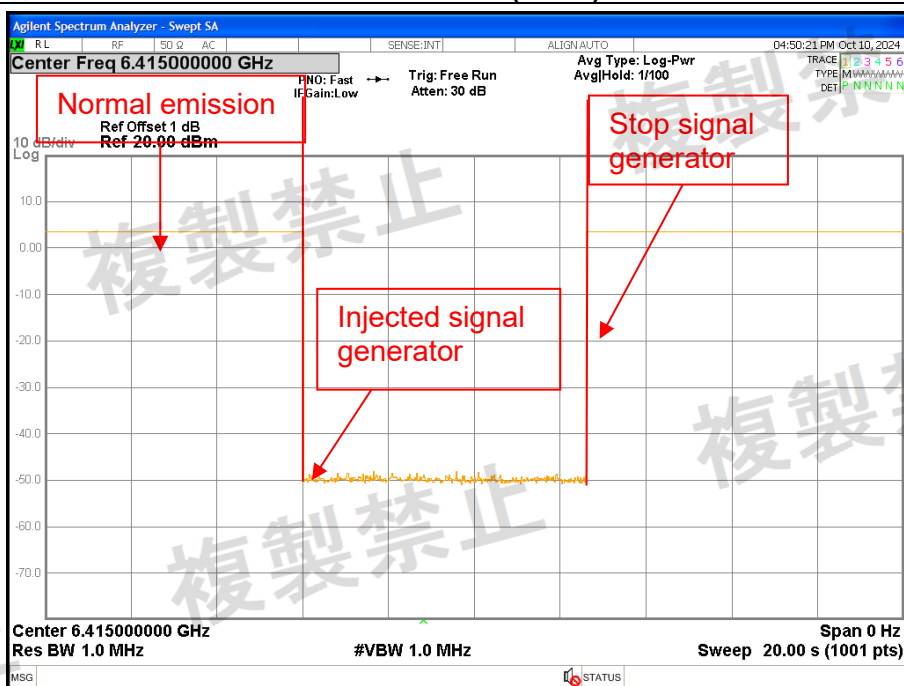


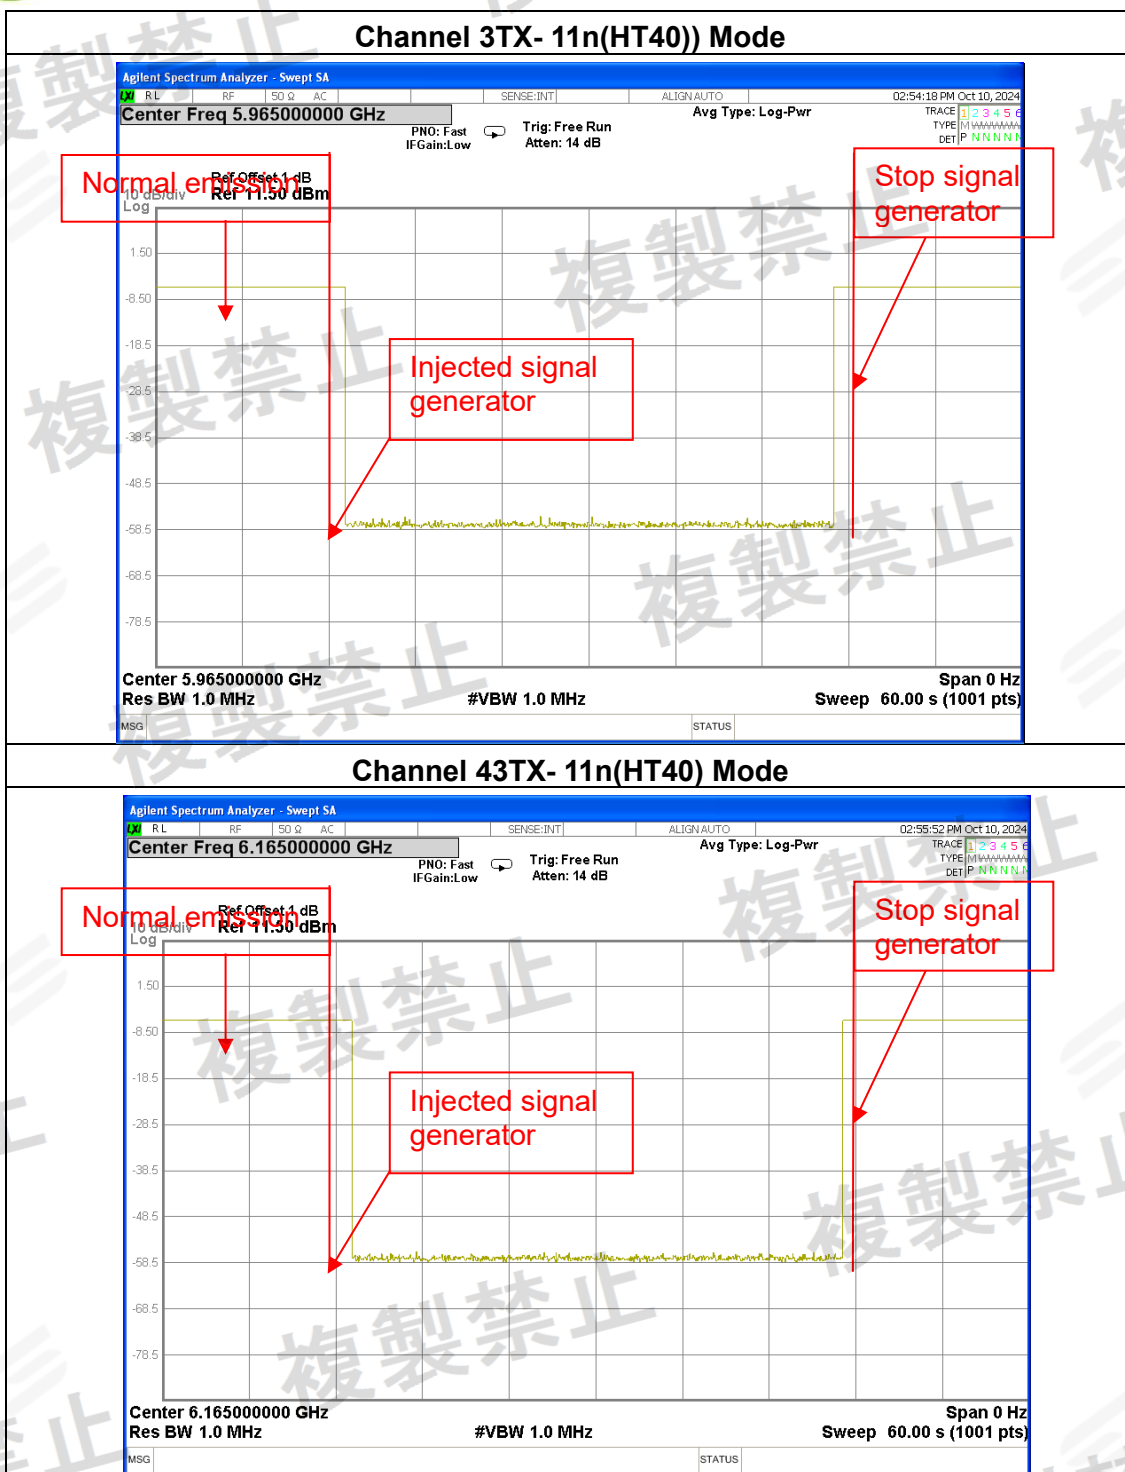


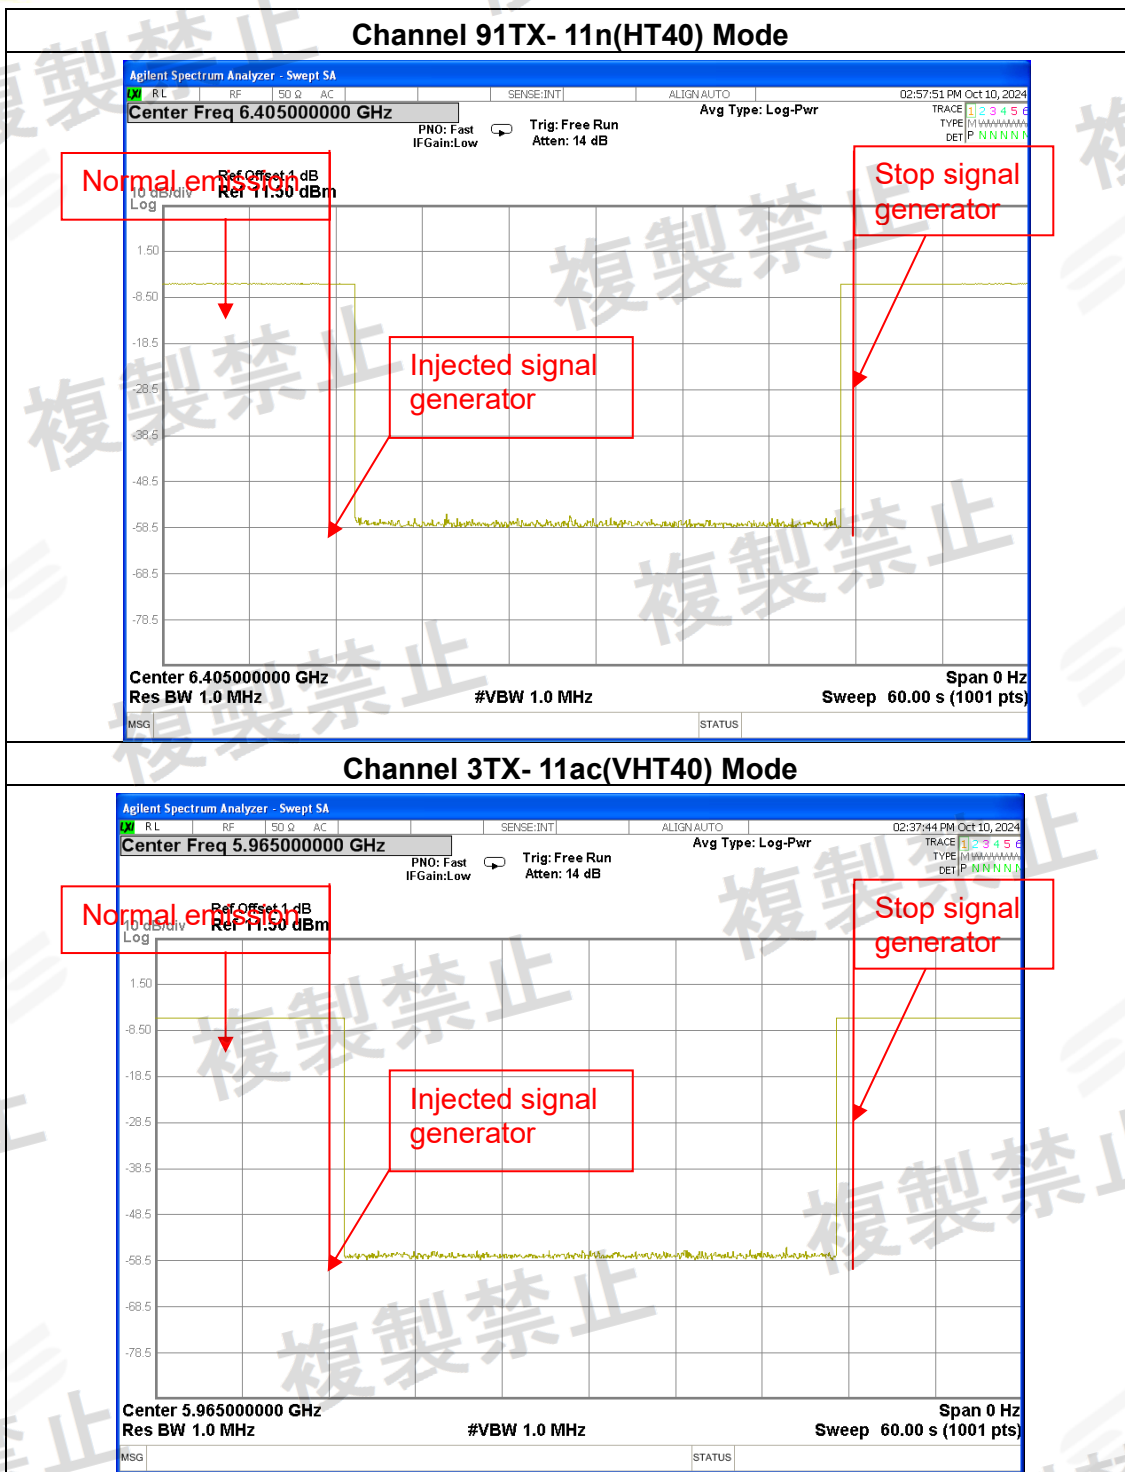

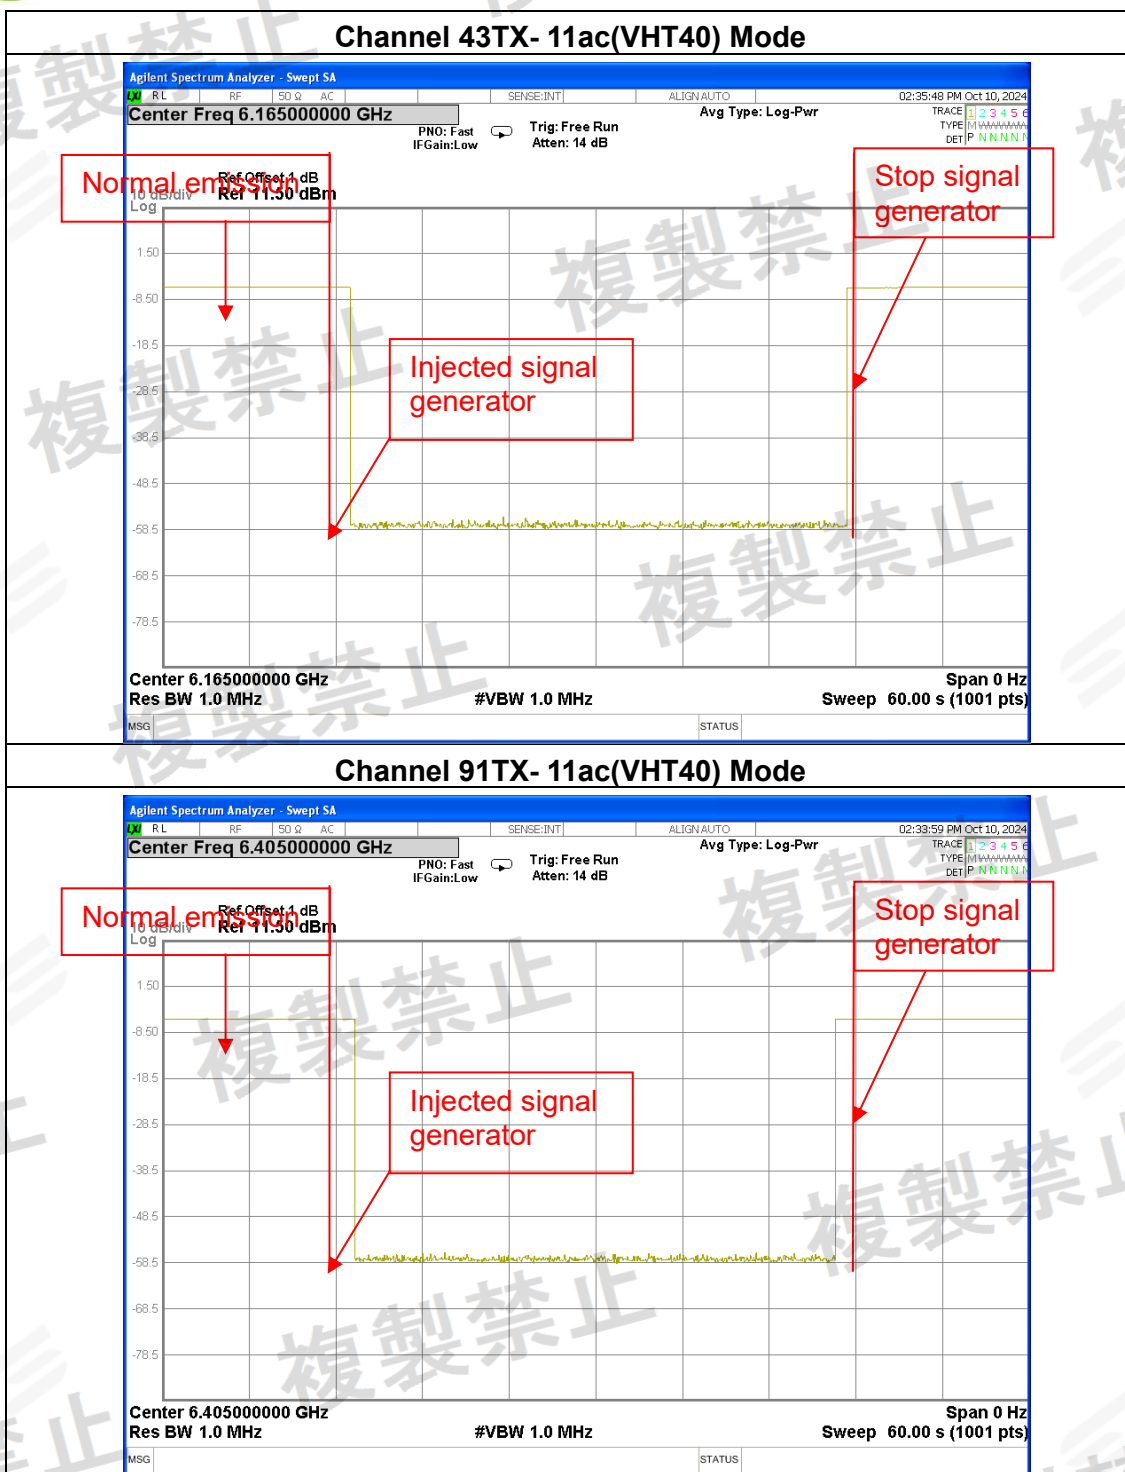

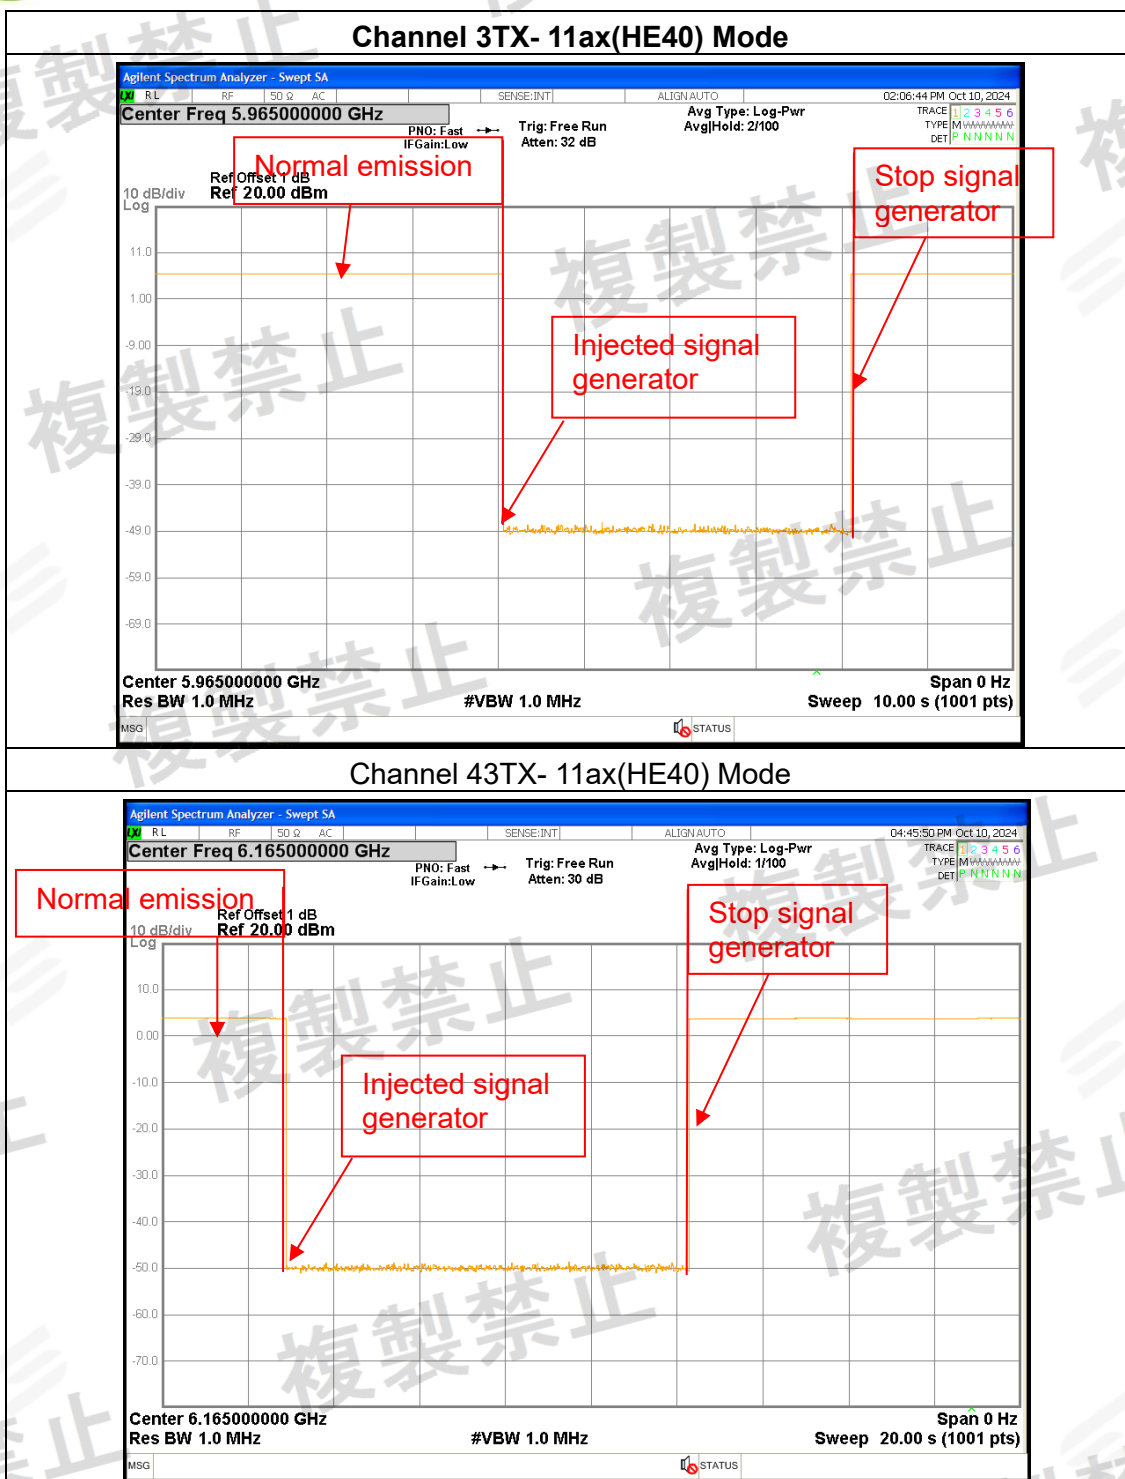


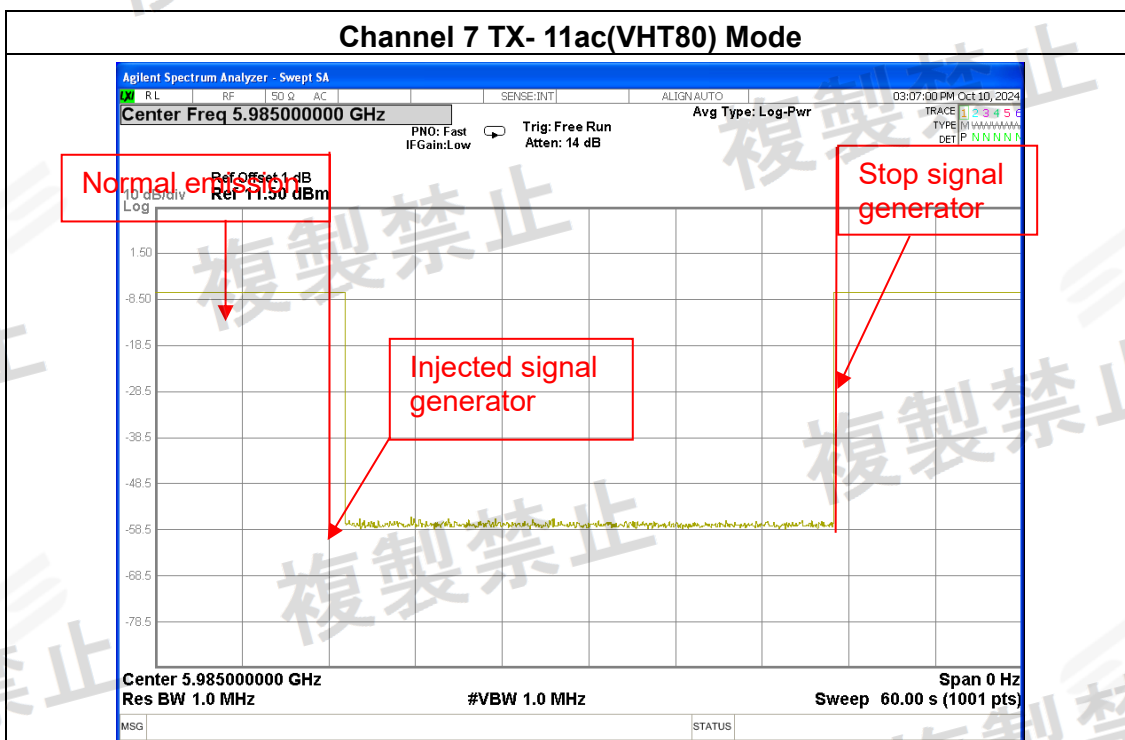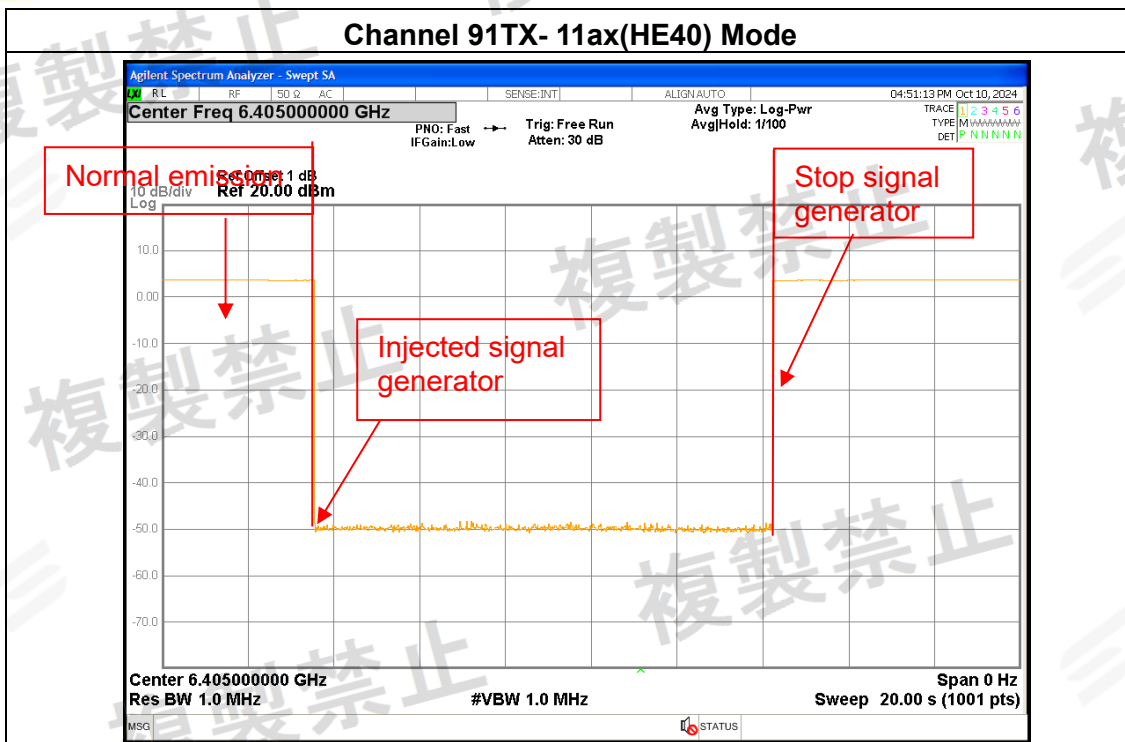

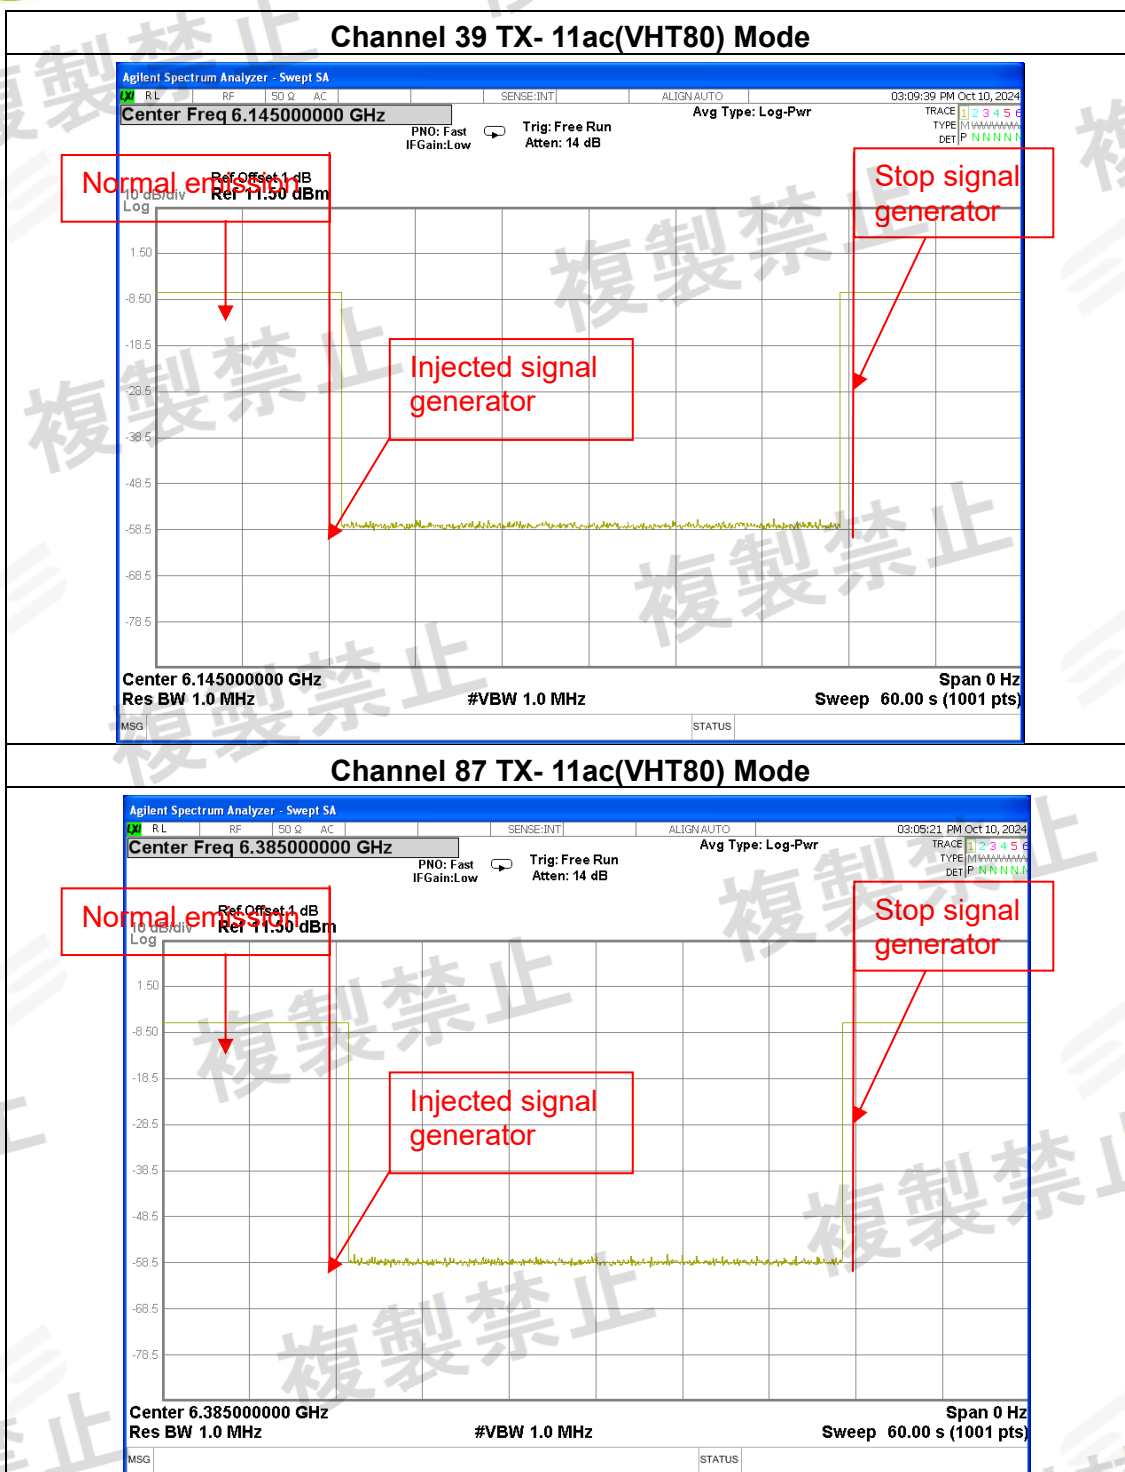




Channel 7 TX- 11ax(HE80) Mode

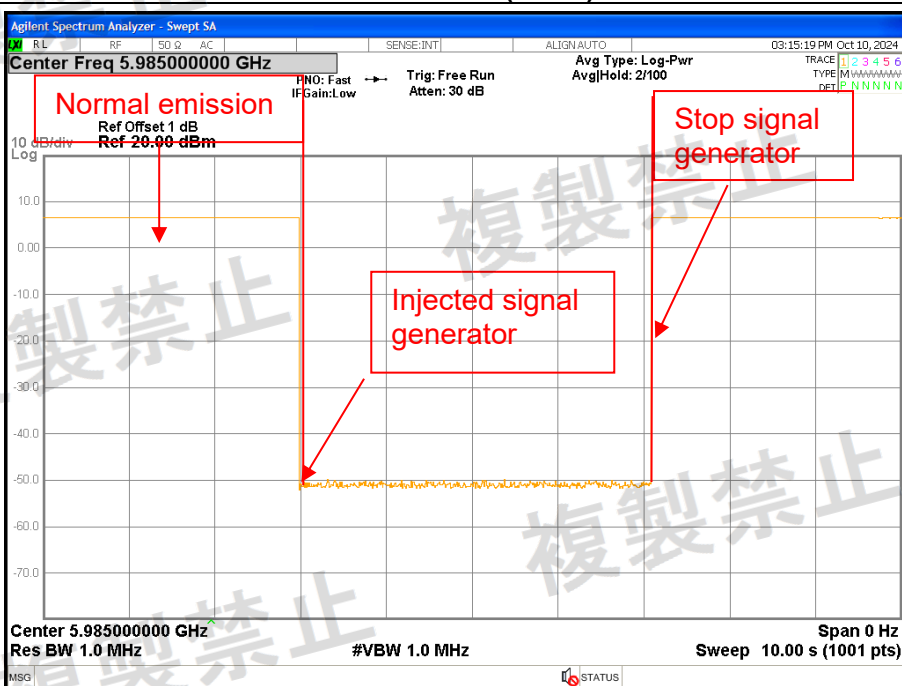


Channel 39 TX- 11ax(HE80) Mode

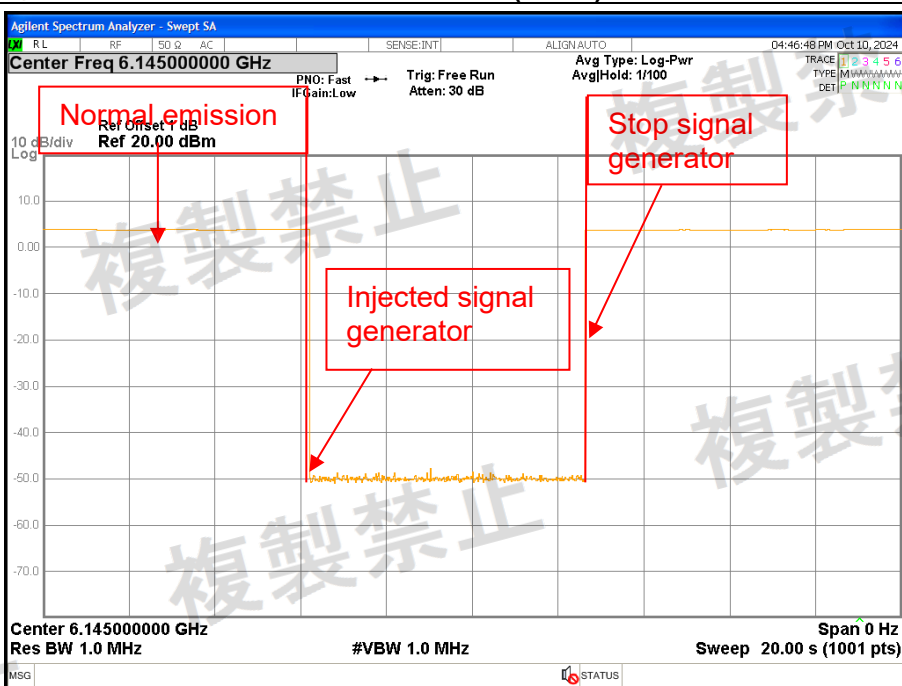






Channel 87 TX- 11ax(HE80) Mode

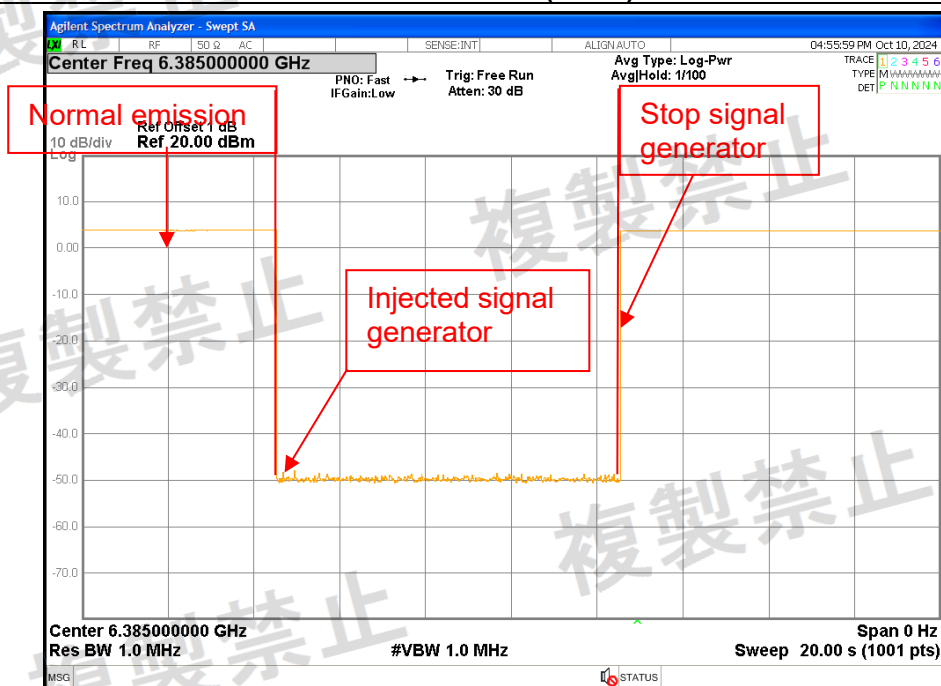

Channel 15 TX- 11ac(VHT160) Mode

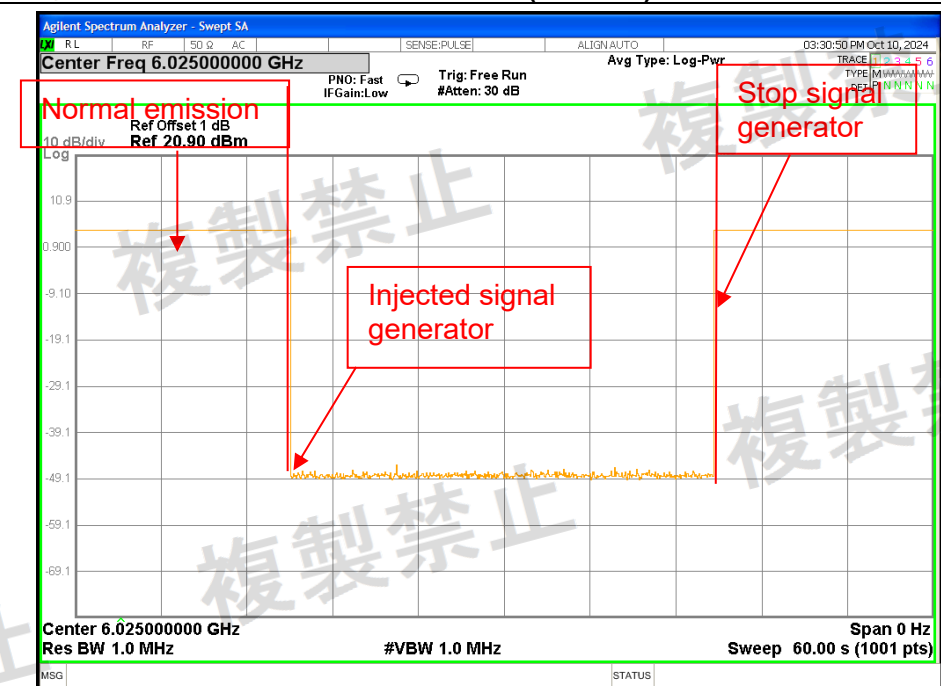

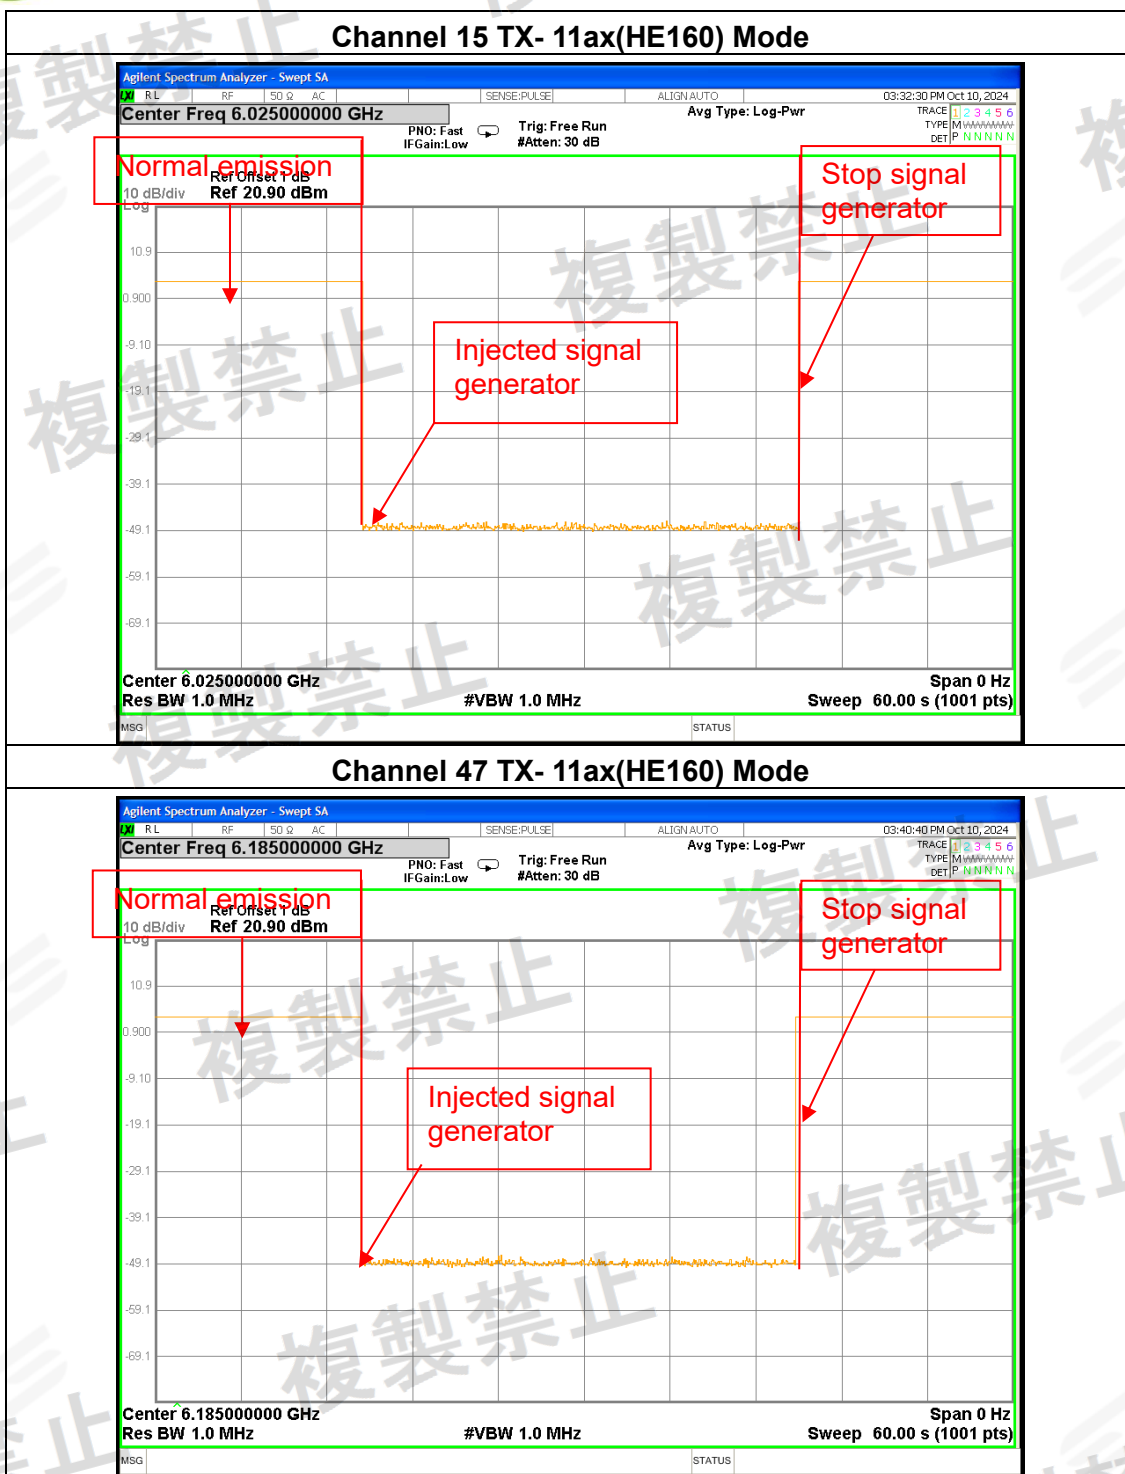

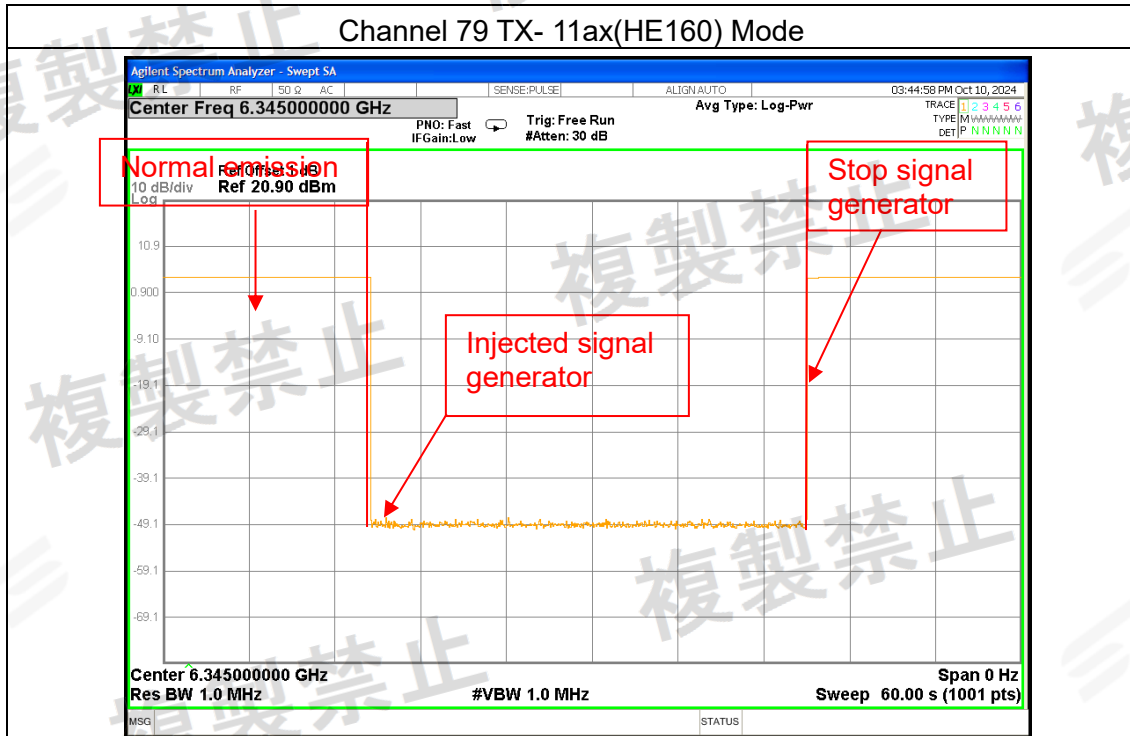



11. ADJACENT CHANNEL POWER

11.1 LIMIT

Item	Operation band	Occupied Bandwidth	Limits	
Adjacent Channel Power	5955 MHz ~ 6415MHz	20MHz system	$F_c \pm 20\text{MHz} \pm 10\text{MHz}$	BW: -25dBc or less
			$F_c \pm 40\text{MHz} \pm 10\text{MHz}$	BW: -40dBc or less
		40MHz system	$F_c \pm 40\text{MHz} \pm 20\text{MHz}$	BW: -25dBc or less
			$F_c \pm 80\text{MHz} \pm 20\text{MHz}$	BW: -40dBc or less
		80MHz system	$F_c \pm 80\text{MHz} \pm 40\text{MHz}$	BW: -25dBc or less
			$F_c \pm 160\text{MHz} \pm 40\text{MHz}$	BW: -40dBc or less
		160MHz system	$F_c \pm 160\text{MHz} \pm 80\text{MHz}$	BW: -25dBc or less
			$F_c \pm 320\text{MHz} \pm 280\text{MHz}$	BW: -40dBc or less

11.2 TEST PROCEDURES

1. Setting of SA is following as: RB: 300KHz / VB:300KHz / SPAN: 100MHz/200MHz/400MHz
Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: peak / Trace mode: Max hold/ Sweep Time Auto

11.3 TEST SETUP



11.4 TEST DEVIATION

There is no deviation with the original standard.

11.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

11.6 TEST RESULT

Note: The test data please reference to attachment "STS2408324W01_Appendix WIFI 6E".



12. TRANSMISSION BURST LENGTH

12.1 LIMIT

Item	Limits
Transmission Burst Length	8ms or less

12.2 TEST PROCEDURES

1. Connected the EUT's Antenna port to the Spectrum Analyzer by suitable attenuator,
Setting of SA is following as: RB: 1MHz / VB: 1MHz
Sweep time: 3ms / Detect mode: clear write Trace mode: normal

12.3 TEST SETUP



12.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

12.5 TEST RESULT

Note: The test data please reference to attachment "STS2408324W01_Appendix WIFI 6E".



13. EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※