



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

TEST REPORT

Ordinance Article 2 paragraph 1 item (19)

Report Reference No.....: CTA25041101701

Compiled by

(position+printed name+signature)...: File administrators Zoey Cao

Supervised by

(position+printed name+signature)...: Project Engineer Ace Chai

Approved by

(position+printed name+signature)...: RF Manager Eric Wang

Date of issue.....: Apr. 21, 2025

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Baobi Internationale Trading Limited

Address: Room 803B, 8/F., West Coast International Building, 290-296 Un Chau Street, Cheung Sha Wan, Kowloon, Hong Kong, China

Test specification

Standard: Ordinance Article 2 paragraph 1 item (19)

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: surveillance camera

Trade Mark: N/A

Manufacturer: Dongguan Lemon Tree Technology CO.,LTD

Model/Type reference.....: SDM-334

Listed Models: N/A

Modulation: GFSK

Frequency.....: From 2402MHz-2480MHz

Ratings: DC 3.7V From battery and DC 5.0V From external circuit

Result.....: PASS

TEST REPORT

Equipment under Test : surveillance camera

Model /Type : SDM-334

Listed Models : N/A

Applicant : **Baobi Internationale Trading Limited**

Address : Room 803B, 8/F., West Coast International Building, 290-296 Un
Chau Street, Cheung Sha Wan, Kowloon, Hong Kong, China

Manufacturer : **Dongguan Lemon Tree Technology CO.,LTD**

Address : Room 101, Building 1, No. 5, Minye Street, Tangxia Town, Dongguan
City, Guangdong Province, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	SUMMARY	4
1.1	Test Standards	4
1.2	Test Description	4
1.3	TEST ENVIRONMENT	5
1.4	Measurement Uncertainty	5
2	GENERAL INFORMATION	6
2.1	General Remarks	6
2.2	Environmental conditions	6
2.3	General Description of EUT	6
2.4	Description of Test Modes	7
2.5	Measurement Instruments List	7
2.6	Table for Parameters of Test Software Setting	7
2.7	Description of Test Modes	7
2.8	Test Voltage	8
3	TEST CONDITIONS AND RESULTS	9
3.1	Frequency Error	9
3.2	Antenna Output Power and Output Power Tolerance	11
3.3	Occupied Bandwidth and Spreading Bandwidth	12
3.4	Unwanted Emission Strength	16
3.5	Secondary Radiated Emission Strength	21
3.6	Construction Protection Method	23
3.7	Interference Prevention Function	24
3.8	Carrier Sensing Function	25
4	TEST SETUP PHOTOS OF THE EUT	26
5	PHOTOS OF THE EUT	27

1 SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

[ARIB STD-T66](#): Second-Generation Low-Power Data Communication System/Wireless LAN System
[MIC Notice No.88 Appendix No. 43](#): 2.4 GHz band wide-band low-power data communication system

1.2 Test Description

ARIB STD-T66 Version 3.7/2014		
CLAUSE	Description of Test (Transmitter Parameters)	Result
3.2 (2)	Antenna Power	Complies
3.2 (3)	Tolerances for Antenna Power	Complies
3.2 (4)	Frequency Tolerance	Complies
3.2 (5)	Transmission Rate	Complies
3.2 (7)	Occupied Frequency Bandwidth	Complies
3.2 (8)	Spread Bandwidth	Complies
3.2 (11)	Dwell Time	N/A
3.2 (6)	Spurious Emissions	Complies
3.6	Transmission Antenna Gain (EIRP Antenna Power)	N/A
3.6	Transmission Radiated Angle Width (3dB Beam width)	N/A
/	Interference prevention function	Complies
/	Carrier Sensing function	N/A
Receiver Parameters		
3.3 (1)	Secondary Radiated Emissions	Complies

Note: (1) N/A is an abbreviation for Not Applicable.
 (2) N/T means this test item is not tested.

Note: 1: "N/A" denotes test is not applicable in this Test Report

2: MIC Public Notice 88:2004, annex 1 and annex 43

3: MIC Ordinance Regulating Radio Equipment Section 4.17 of Article 49.20

4: Referenced in the standard ARIB STD-T66

1.3 TEST ENVIRONMENT

1.3.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

1.3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2

1.4 Measurement Uncertainty

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR100028-1 [2] and shall correspond to an expansion factor (coverage factor) $K=1.96$ or $K=2$ (which provide confidence levels of respectively 95% and 95.5% in the case where the distributions characterizing the actual measurement uncertainties are normal).

Parameter	Uncertainty
Frequency error / 99%&90% bandwidth	$\pm 1.62 \times 10^{-6}$
Total RF power, conducted	$\pm 0.8\text{dB}$
Spurious emissions, conducted	$\pm 0.8\text{dB}$
DC and low frequency voltages	$\pm 0.05\%$
Humidity	$\pm 5\%$
Temperature	$\pm 1^\circ\text{C}$

2 GENERAL INFORMATION

2.1 General Remarks

Date of receipt of test sample	:	Apr. 11, 2025
Testing commenced on	:	Apr. 11, 2025
Testing concluded on	:	Apr. 21, 2025

2.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Voltage	Normal Voltage	DC 3.7V
	High Voltage	DC 4.2V
	Low Voltage	DC 3.4V
Other	Normal Temperature	25°C
	Relative Humidity	55 %
	Air Pressure	989 hPa

Note: As the EUT was powered by DC 3.7V From battery and DC 5.0V From external circuit, and with the voltage stabilizing circuit used, the chip voltage received floating not exceed $\pm 1\%$ of nominal condition when working on extreme voltage, so all test performed at nominal voltage only.

2.3 General Description of EUT

Product Name:	surveillance camera
Model/Type reference:	SDM-334
Power supply:	DC 3.7V From battery and DC 5.0V From external circuit
Bluetooth BLE	
Supported type:	Bluetooth for low Energy
Bluetooth version:	5.0
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Rated power	0.0015 W
Antenna type:	Ceramic antenna
Antenna gain:	1.66 dBi
Software version:	01
Hardware Version:	01

Note: For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.4 Description of Test Modes

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List BLE:

Channel	Frequency (MHz)
00	2402
01	2404
02	2406
⋮	⋮
19	2440
⋮	⋮
37	2476
38	2478
39	2480

Note: Test performed at the lowest/middle/highest frequencies selected in the list above for EUT supported while working on specified mode.

2.5 Measurement Instruments List

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Institution	Calibration Date	Calibration Due Date
1	Spectrum Analyzer	Agilent	N9020A	MY53281423	LISAI	2024/08/03	2025/08/02
2	Signal generator	Agilent	N5182A	MY46240709	LISAI	2024/08/03	2025/08/02
3	Power Meter	Agilent	U2021X	MY47410295	LISAI	2024/08/03	2025/08/02
4	DC Power Supply	Agilent	E3642A	N/A	LISAI	2024/08/03	2025/08/02
5	Oscilloscope	Tektronix	TDS3012	B021220	LISAI	2024/08/03	2025/08/02
6	Spectrum Analyzer	R&S	FSU	200311	LISAI	2024/08/03	2025/08/02

Calibration by the calibration agencies listed in the table correspond to paragraph 4 (ii) (c) of Article 24-2 in the Radio Law".

LiSai-Guangzhou LiSai Calibration and Testing Co.,LTD.

2.6 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters:

Test Software Version	Bluetooth MP Tool		
Frequency	2402MHz	2440MHz	2480MHz
Bluetooth V5.0	Default	Default	Default

2.7 Description of Test Modes

Tested channel, Frequency and Modulation Information		
CH0	2402MHz	GFSK(1Mbps)
CH19	2440MHz	GFSK(1Mbps)
CH39	2480MHz	GFSK(1Mbps)
Note: According exploratory test, EUT has maximum output power for GFSK modulation, All the test modes were tested, but only the worst case was recorded in this report.		

2.8 Test Voltage

POWER SUPPLY VOLTAGE FLUCTUATION TEST

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input To EUT	DC 3.70V	DC 4.20V	DC 3.40V
Output To RF Module	DC 3.30V	DC 3.30V	DC 3.30V
Voltage Variation (%)	--	--	--

Note:

Voltage Variation (%)

= (Output high or Low Voltage - Output Normal Voltage) / Output Normal Voltage * 100

During the input supply voltage to the EUT from the external power source is varied by +/- 10%, if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/-1%. Exempt extremely high and low supply voltage condition test, EUT only operated in normal voltage to test all regulations.

The sample power supply was confirmed that input voltage variation at the radio unit in the radio equipment to be tested is less than +1% against a variation of +10% at the input voltage from the external power supply to the radio equipment, and the radio equipment was designed so as to be operated in a specified voltage variation limit within +10%, Radio can only tested at rated voltage.


3 Test conditions and Results

3.1 Frequency Error

LIMIT

Tolerance of frequency shall be $\pm 50 \times 10^{-6}$.

TEST CONFIGURATION

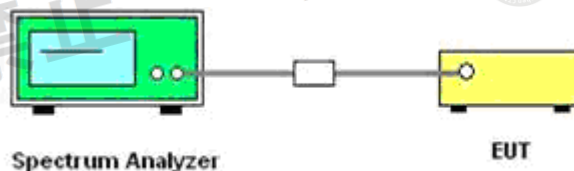

TEST PROCEDURE

The EUT was directly connected to the spectrum analyser and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: non-modulation

Spectrum Condition:

Frequency: test frequency

Span: 300 KHz

RBW: 10 KHz

VBW: 10 KHz

Sweep time: Auto


Detector mode: Positive peak

Indication mode: max hold

TEST RESULTS


Test Condition	Frequency (MHz)	Read (MHz)	Deviation (MHz)	Tolerance (ppm)	Limit (ppm)	Result
Non-modulation	2402	2401.9976	-0.0024	-0.9992	50.00	Pass
	2440	2439.9970	-0.0030	-1.2295		
	2480	2479.9967	-0.0033	-1.3306		

Test Plot of Frequency Tolerance

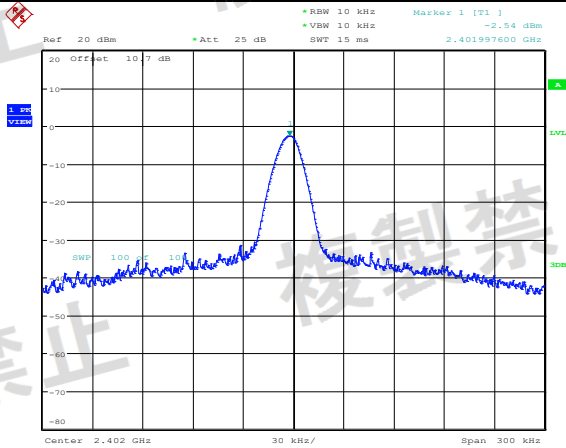


Date: 21.APR.2025 10:09:51

2402 MHz

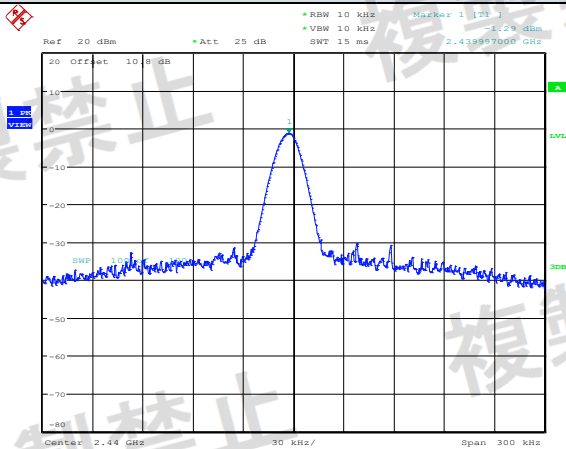

Date: 21.APR.2025 10:10:19

2440 MHz

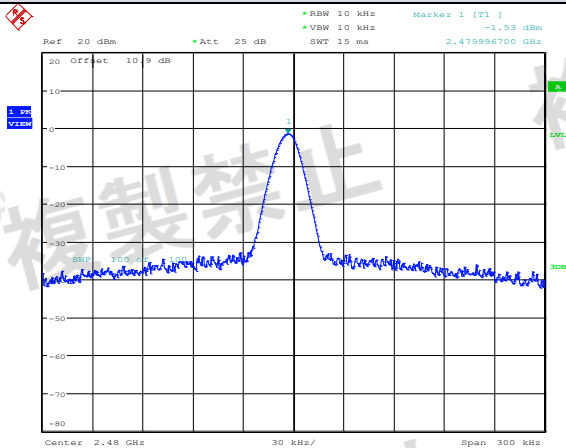

Date: 21.APR.2025 10:10:48

2480 MHz

3.2 Antenna Output Power and Output Power Tolerance

LIMIT

- $\leq 3 \text{ mW /MHz}$ (FHSS from 2402-2480 MHz)
- $\leq 10 \text{ mW/MHz}$ (OFDM, DSSS from 2400-2483.5 MHz)
- $\leq 10 \text{ mW}$ (other from 2400-2483.5 MHz)


The Output Power Tolerance must be within +20%.

E.i.r.p:

- $\leq 12.14 \text{ dBm/MHz}$ (OFDM, DS form 2400-2483.5 MHz)

Note: E.I.R.P will not be applied to the transmission antenna which has a gain of 2.14dBi or less.

TEST CONFIGURATION

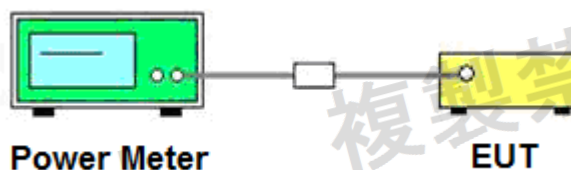

TEST PROCEDURE

- EUT have transmitted continuous maximum power
- Antenna Power Error is definition that actual measure antenna power tolerance within +20% power range that base on manufacturer declare the conducted power density.

TEST RESULTS

Conducted Antenna Power

Mode	Channel (MHz)	Average burst power (dBm)	Output power (mW)	Limit (mW)	Rated output power (mW)	Tolerance (%)	Limit	Result
GFSK (1 Mbps)	2402	1.42	1.3868	10	1.50	-7.55%	20%	Pass
	2440	1.55	1.4289	10	1.50	-4.74%		
	2480	1.34	1.3614	10	1.50	-9.24%		

Note:


- 1). Test Result: Pass.

3.3 Occupied Bandwidth and Spreading Bandwidth

LIMIT

- Occupied bandwidth: FH $\leq$ 83.5 MHz; OFDM $\leq$ 38 MHz; DS $\leq$ 26 MHz; Others $\leq$ 26 MHz
- Spread Bandwidth: $\geq$ 500 kHz (FH, DS)
- Spread factor >5 .

TEST CONFIGURATION

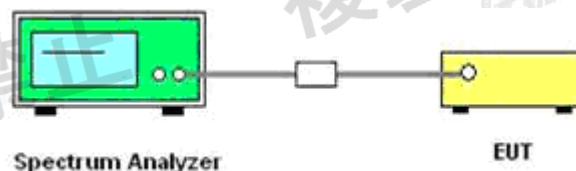

TEST PROCEDURE

Setting of SA is following as follow:

RBW: 30 kHz

VBW: 30 kHz

Sweep time: Auto

Sweep Mode: Continuous sweep

Detect mode: Positive peak

Trace mode: Max hold

EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 99% of occupied bandwidth to measure occupied bandwidth.

EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 90% of occupied bandwidth to measure spread bandwidth.

Spread Factor=Spread Bandwidth/modulation rate.


The modulation rate: MR=1.375Mbps for 802.11b

TEST RESULTS

99% Occupied Bandwidth


Type	Channel (MHz)	Occupied Bandwidth (MHz)	Limit (MHz)	Result
GFSK(1 Mbps)	2402	1.284	<26	Pass
	2440	1.292		
	2480	1.288		

Test Plot of 99% Occupied Bandwidth (GFSK 1 Mbps)

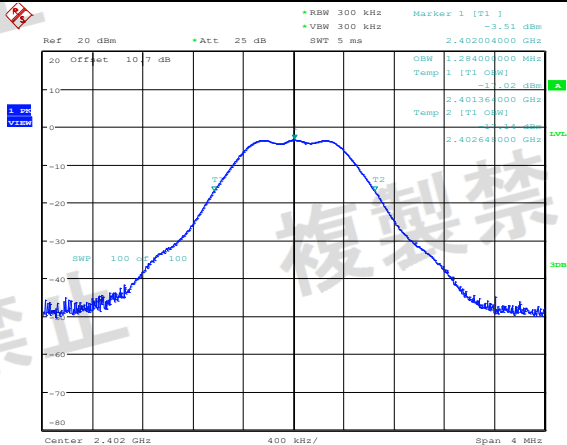


Date: 21.APR.2025 10:03:43

2402 MHz

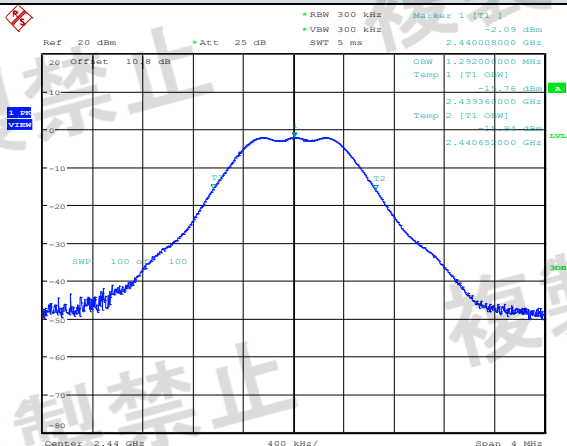

Date: 21.APR.2025 10:05:39

2440 MHz

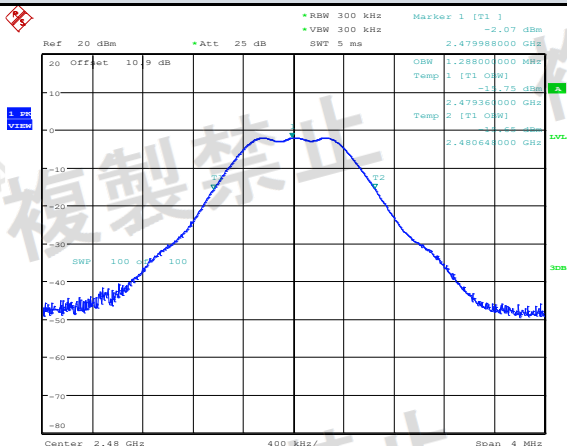

Date: 21.APR.2025 10:07:49


2480 MHz

90% Spread Bandwidth

Type	Channel (MHz)	Spread Bandwidth (MHz)	Spread Factor	Spread Bandwidth Limit (MHz)	Spread Factor Limit	Result
GFSK (1 Mbps)	2402	0.856	N/A	≥ 0.5	N/A	Pass
	2440	0.856				
	2480	0.856				


Note: N/A means not applicable to this modulation type.

Test Plot of 90% Spread Bandwidth(GFSK 1 Mbps)

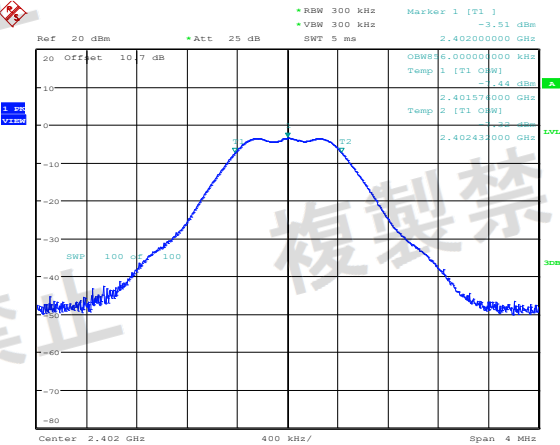


Date: 21.APR.2025 10:04:00

2402 MHz

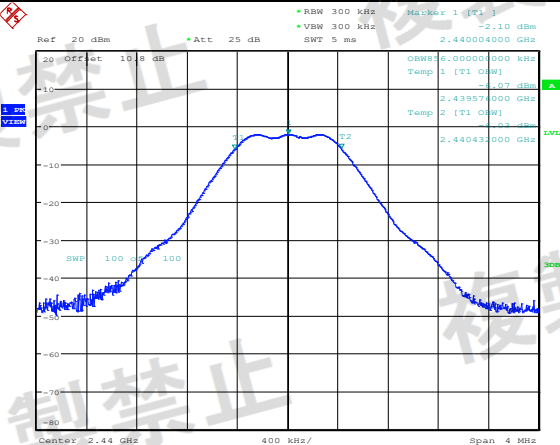

Date: 21.APR.2025 10:05:56

2440 MHz

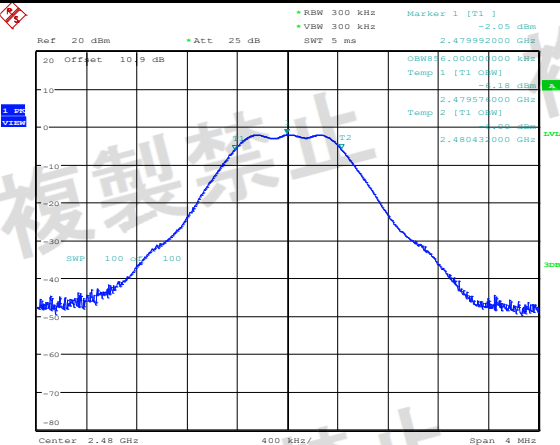

Date: 21.APR.2025 10:06:06

2480 MHz


3.4 Unwanted Emission Strength

LIMIT

Permissible mean power of spurious emission of each frequency supplied to a feeder, that is, mean power of spurious emission in the 1 MHz bandwidth at frequency f other than frequency band used shall be as follows:

- a. $2,387\text{MHz} \leq f \leq 2,400\text{MHz}$ and $2,483.5\text{MHz} < f \leq 2,496.5\text{MHz}$ $25 \mu\text{W}$ or less
b. $2,387\text{MHz} > f$ and $2,496.5\text{MHz} < f$ $2.5 \mu\text{W}$ or less

TEST CONFIGURATION

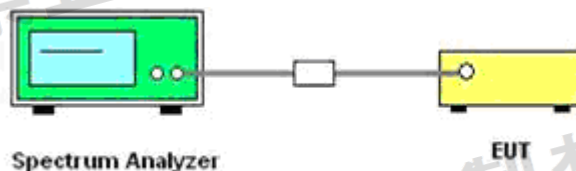

TEST PROCEDURE

The EUT was directly connected to the spectrum analyser and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

Frequency: 30MHz-12.5GHz

RBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)

VBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)


Sweep time: Auto


Detector mode: Positive peak






Indication mode: max hold

TEST RESULTS

TestCondition	TestMode	Antenna	Freq(MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [μW]	Limit [μW]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	913.19	-43.53	≤-26	0.04436	≤2.5	PASS
				1000~2387	2367.24	-49.30	≤-26	0.01175	≤2.5	PASS
				2387~2400	2400.00	-24.71	≤-16	3.38065	≤25	PASS
				2483.5~2496.5	2494.67	-38.87	≤-16	0.12972	≤25	PASS
				2496.5~13000	4803.59	-48.50	≤-26	0.01413	≤2.5	PASS
			2440	30~1000	918.28	-51.35	≤-26	0.00733	≤2.5	PASS
				1000~2387	2382.15	-48.94	≤-26	0.01276	≤2.5	PASS
				2387~2400	2397.45	-38.17	≤-16	0.15241	≤25	PASS
				2483.5~2496.5	2494.81	-39.01	≤-16	0.12560	≤25	PASS
				2496.5~13000	4880.27	-45.71	≤-26	0.02685	≤2.5	PASS
			2480	30~1000	880.21	-51.07	≤-26	0.00782	≤2.5	PASS
				1000~2387	2367.58	-49.76	≤-26	0.01057	≤2.5	PASS
				2387~2400	2392.60	-39.38	≤-16	0.11535	≤25	PASS
				2483.5~2496.5	2483.54	-37.93	≤-16	0.16106	≤25	PASS
				2496.5~13000	4960.10	-47.68	≤-26	0.01706	≤2.5	PASS

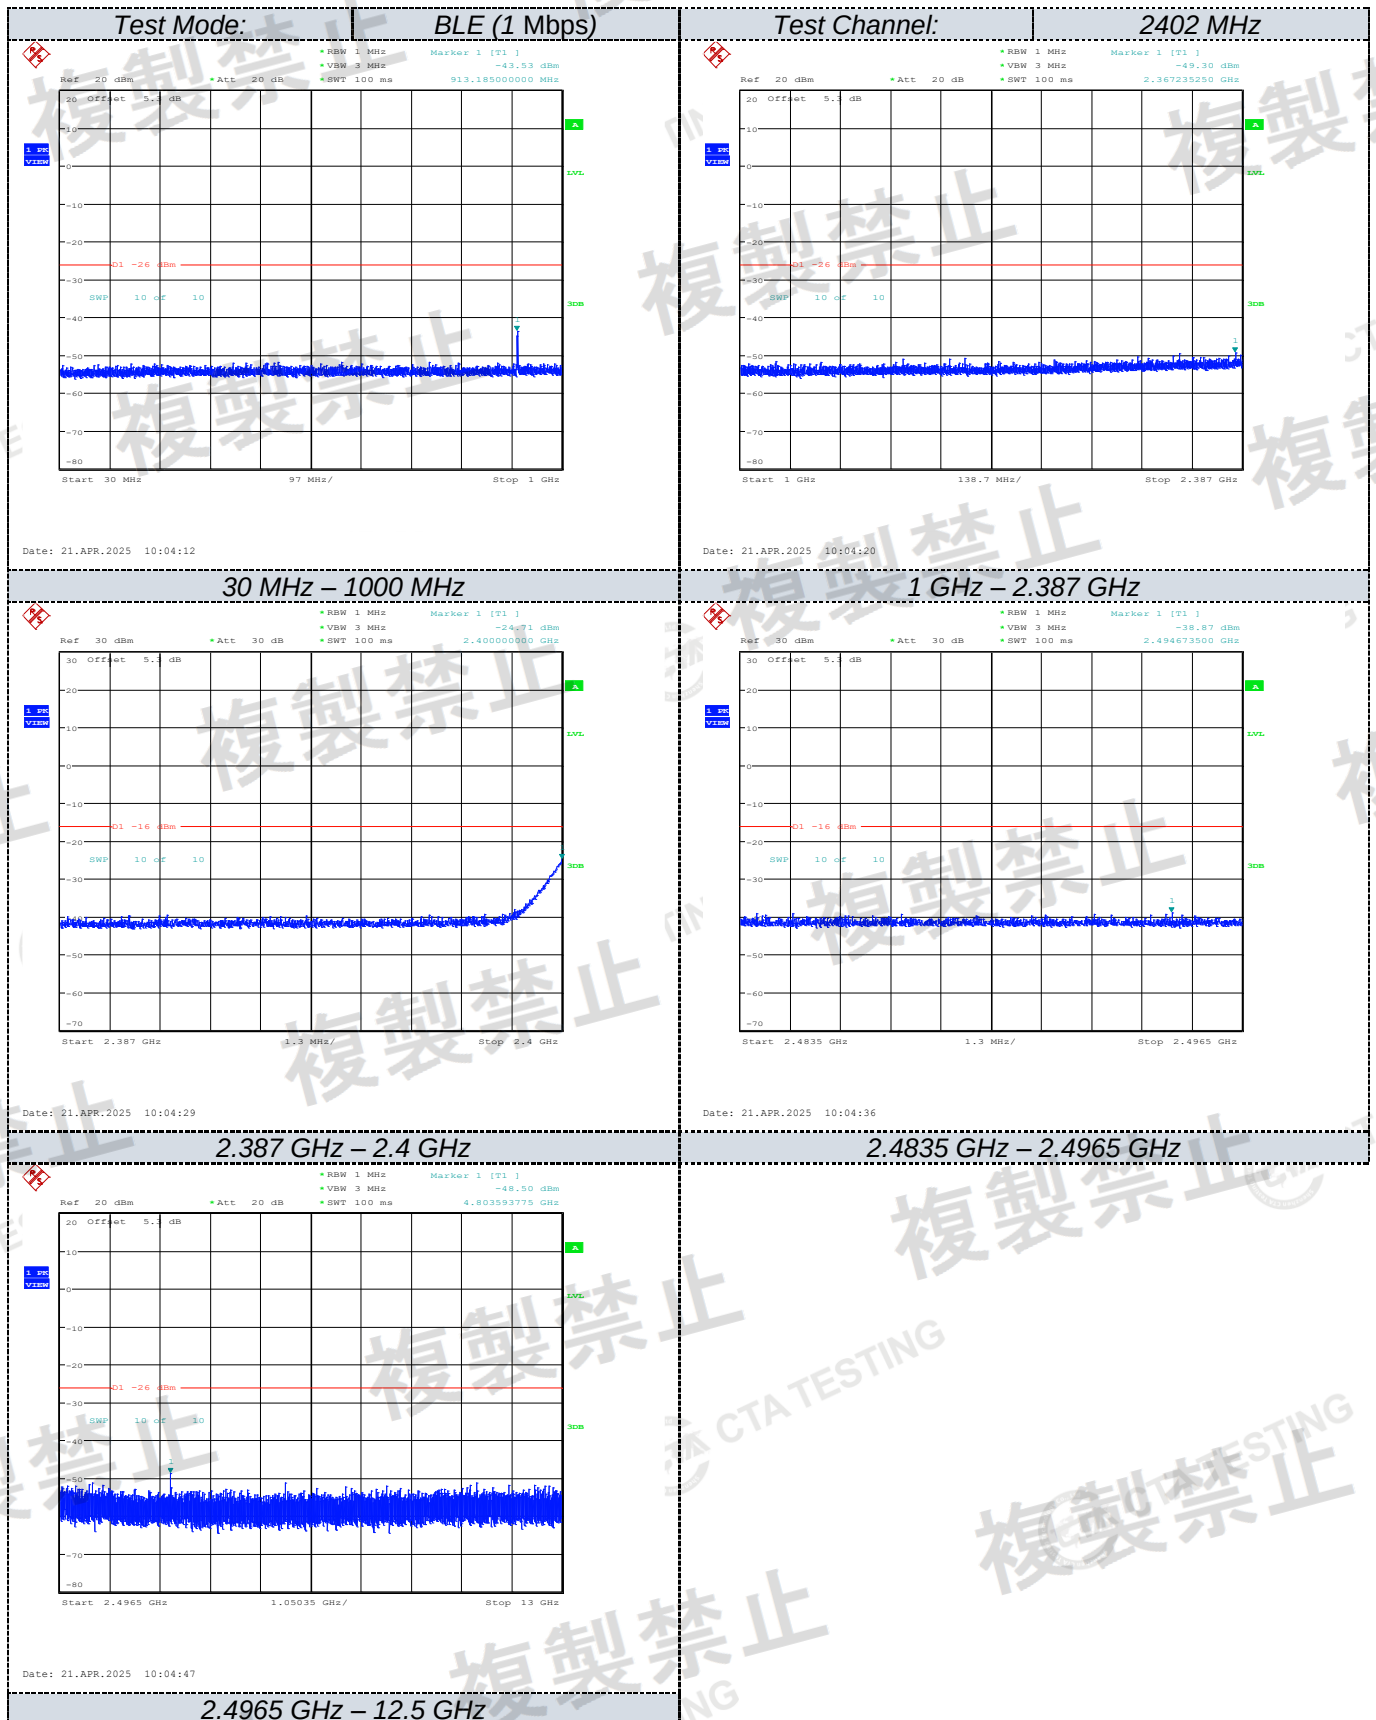

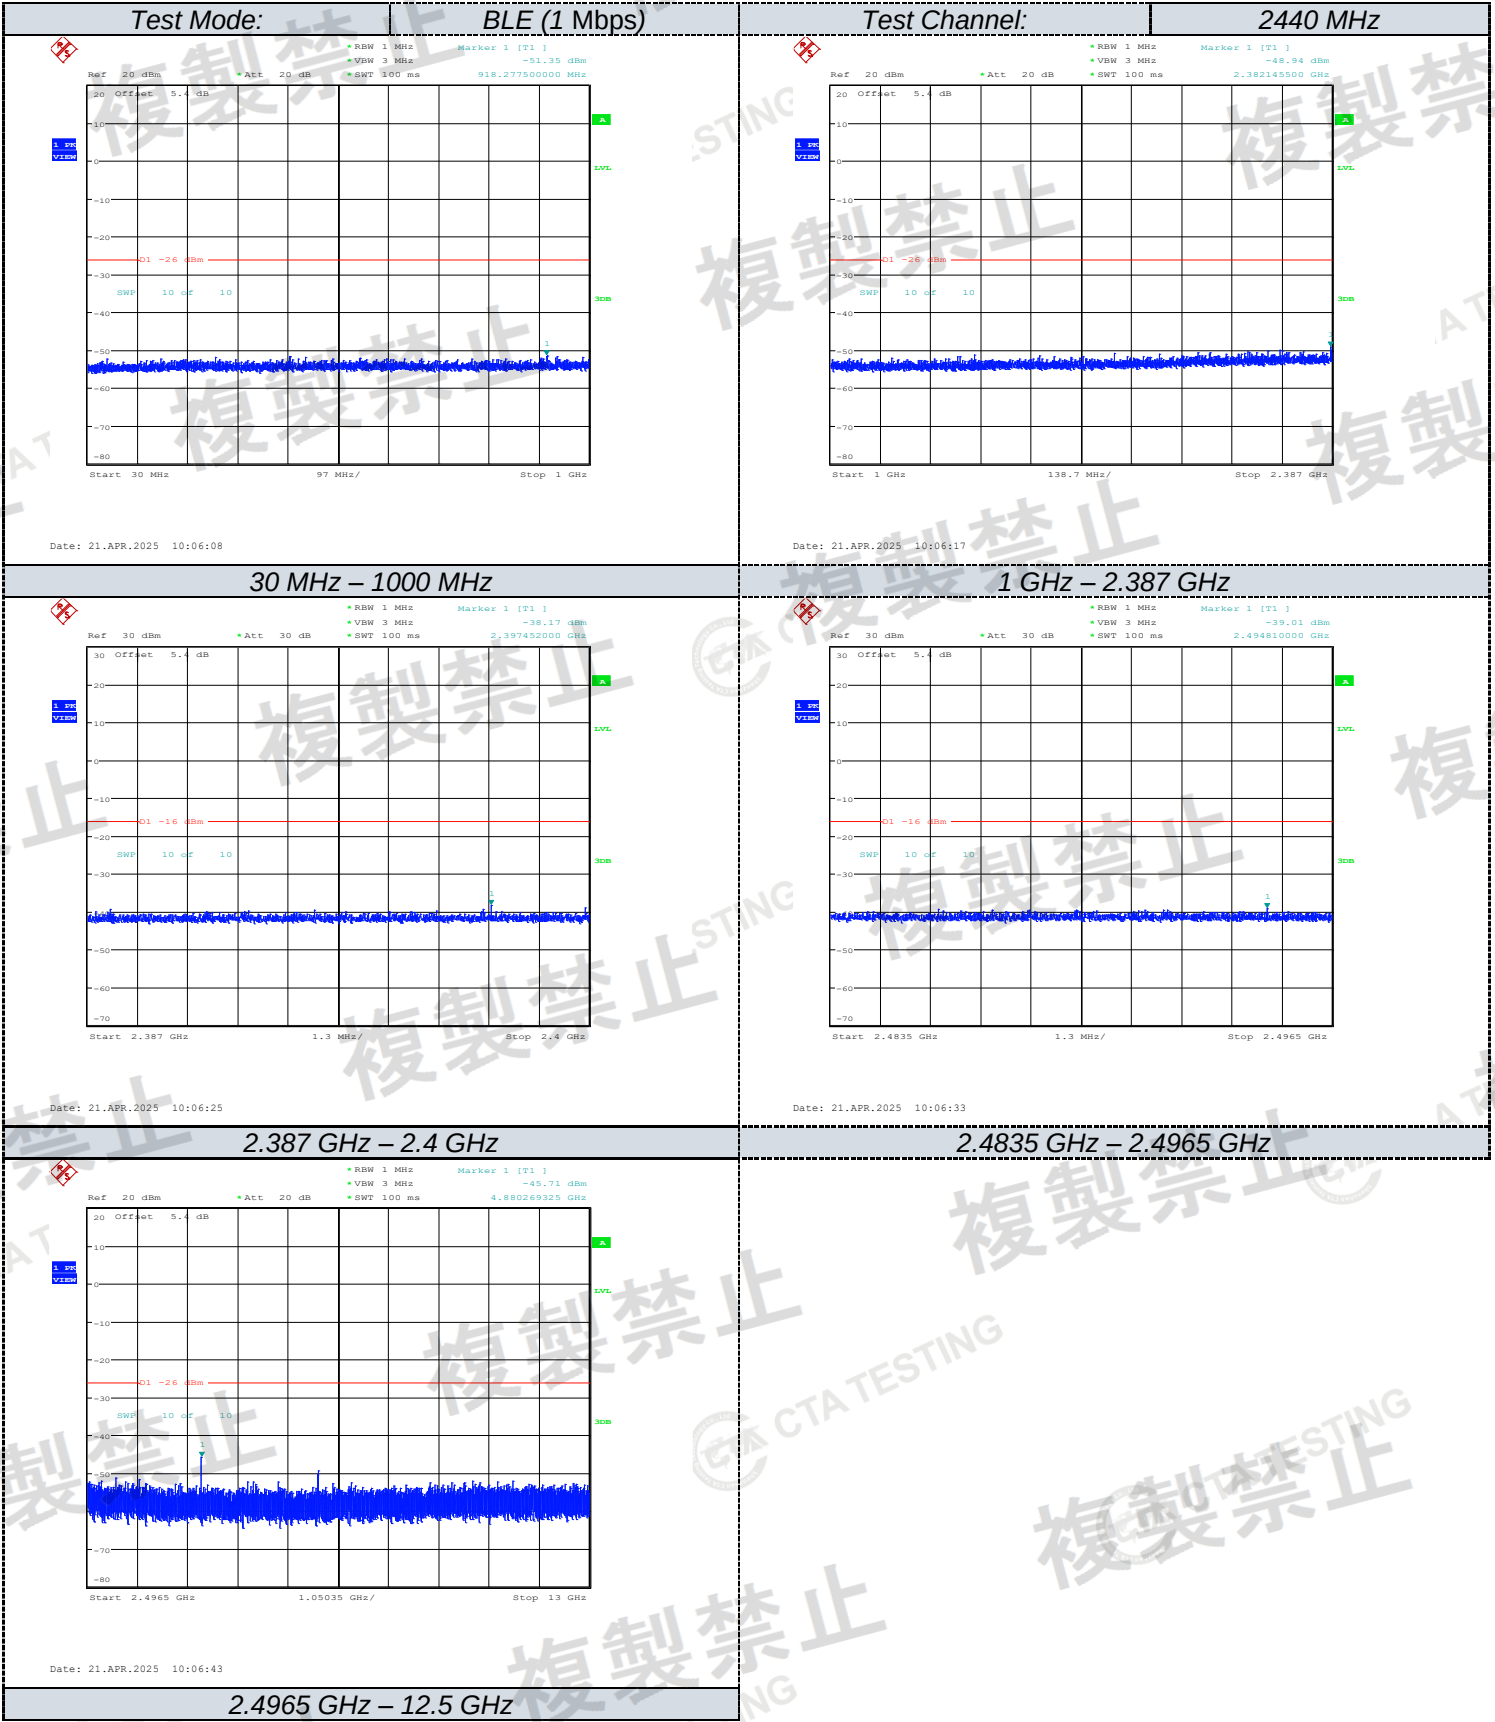

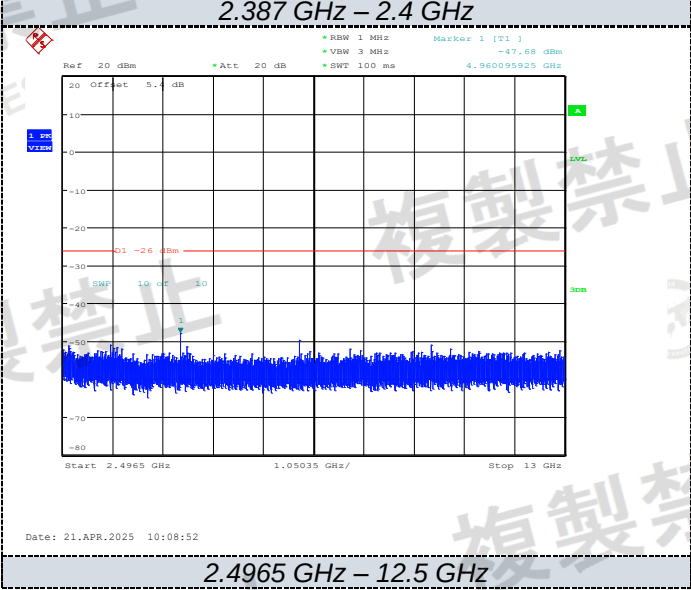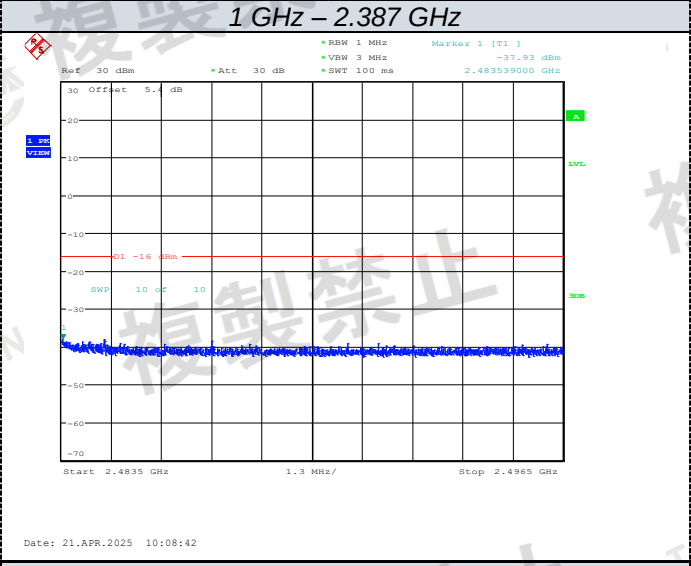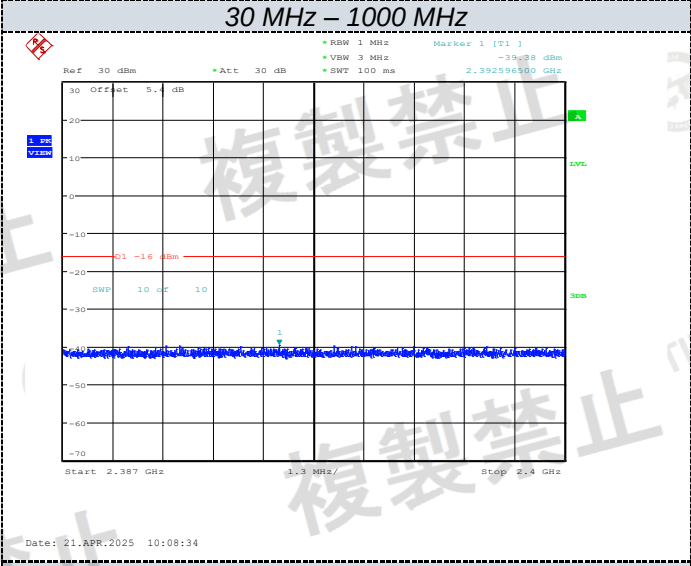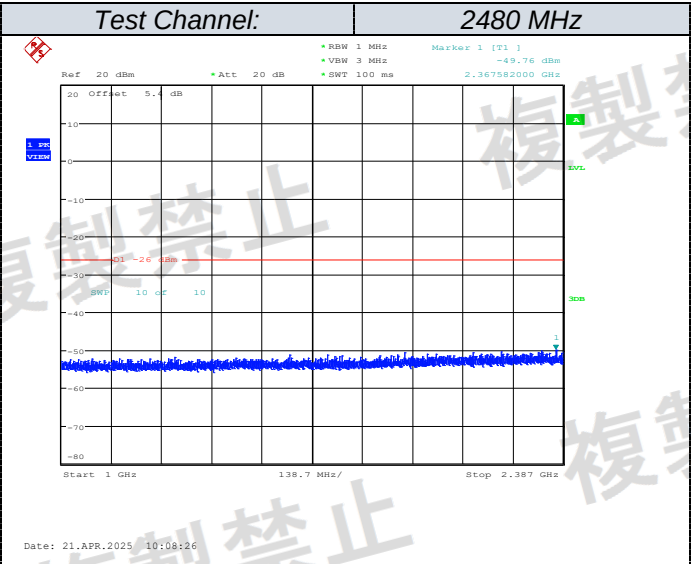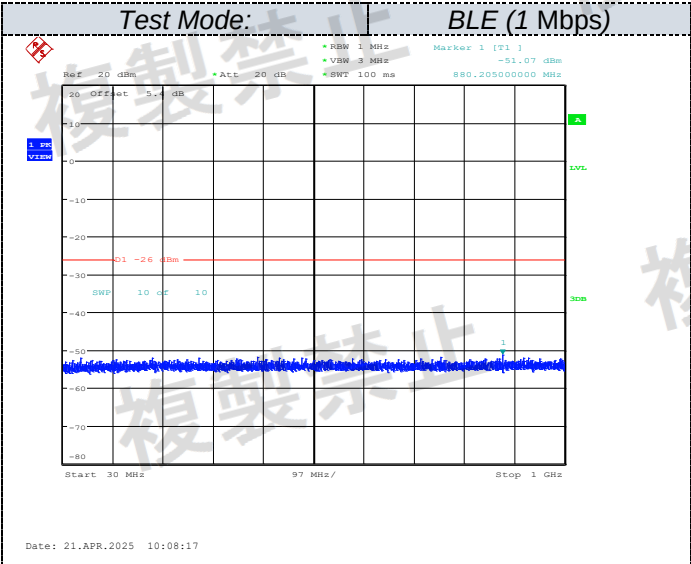


3.5 Secondary Radiated Emission Strength

LIMIT

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit.

TEST CONFIGURATION

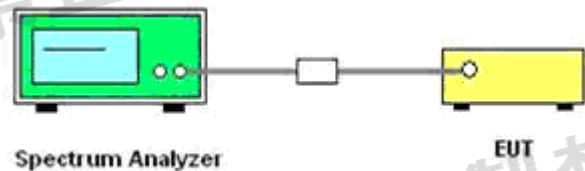


TEST PROCEDURE

The EUT was directly connected to the spectrum analyser and antenna output port as show in the block diagram as TEST CONFIGURATION shows.
EUT Condition: modulation
Spectrum Condition:
Frequency: 30MHz-12.5GHz
RBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
VBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
Sweep time: Auto
Detector mode: Positive peak
Indication mode: max hold

TEST RESULTS

TestCondition	TestMode	Antenna	Freq(MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	951.99	-74.64	≤-54	0.03436	≤4	PASS
				1000~12500	2582.98	-73.04	≤-47	0.04966	≤20	PASS
			2440	30~1000	616.37	-74.46	≤-54	0.03581	≤4	PASS
				1000~12500	2439.23	-71.93	≤-47	0.06412	≤20	PASS
			2480	30~1000	996.12	-74.50	≤-54	0.03548	≤4	PASS
				1000~12500	2474.88	-71.13	≤-47	0.07709	≤20	PASS

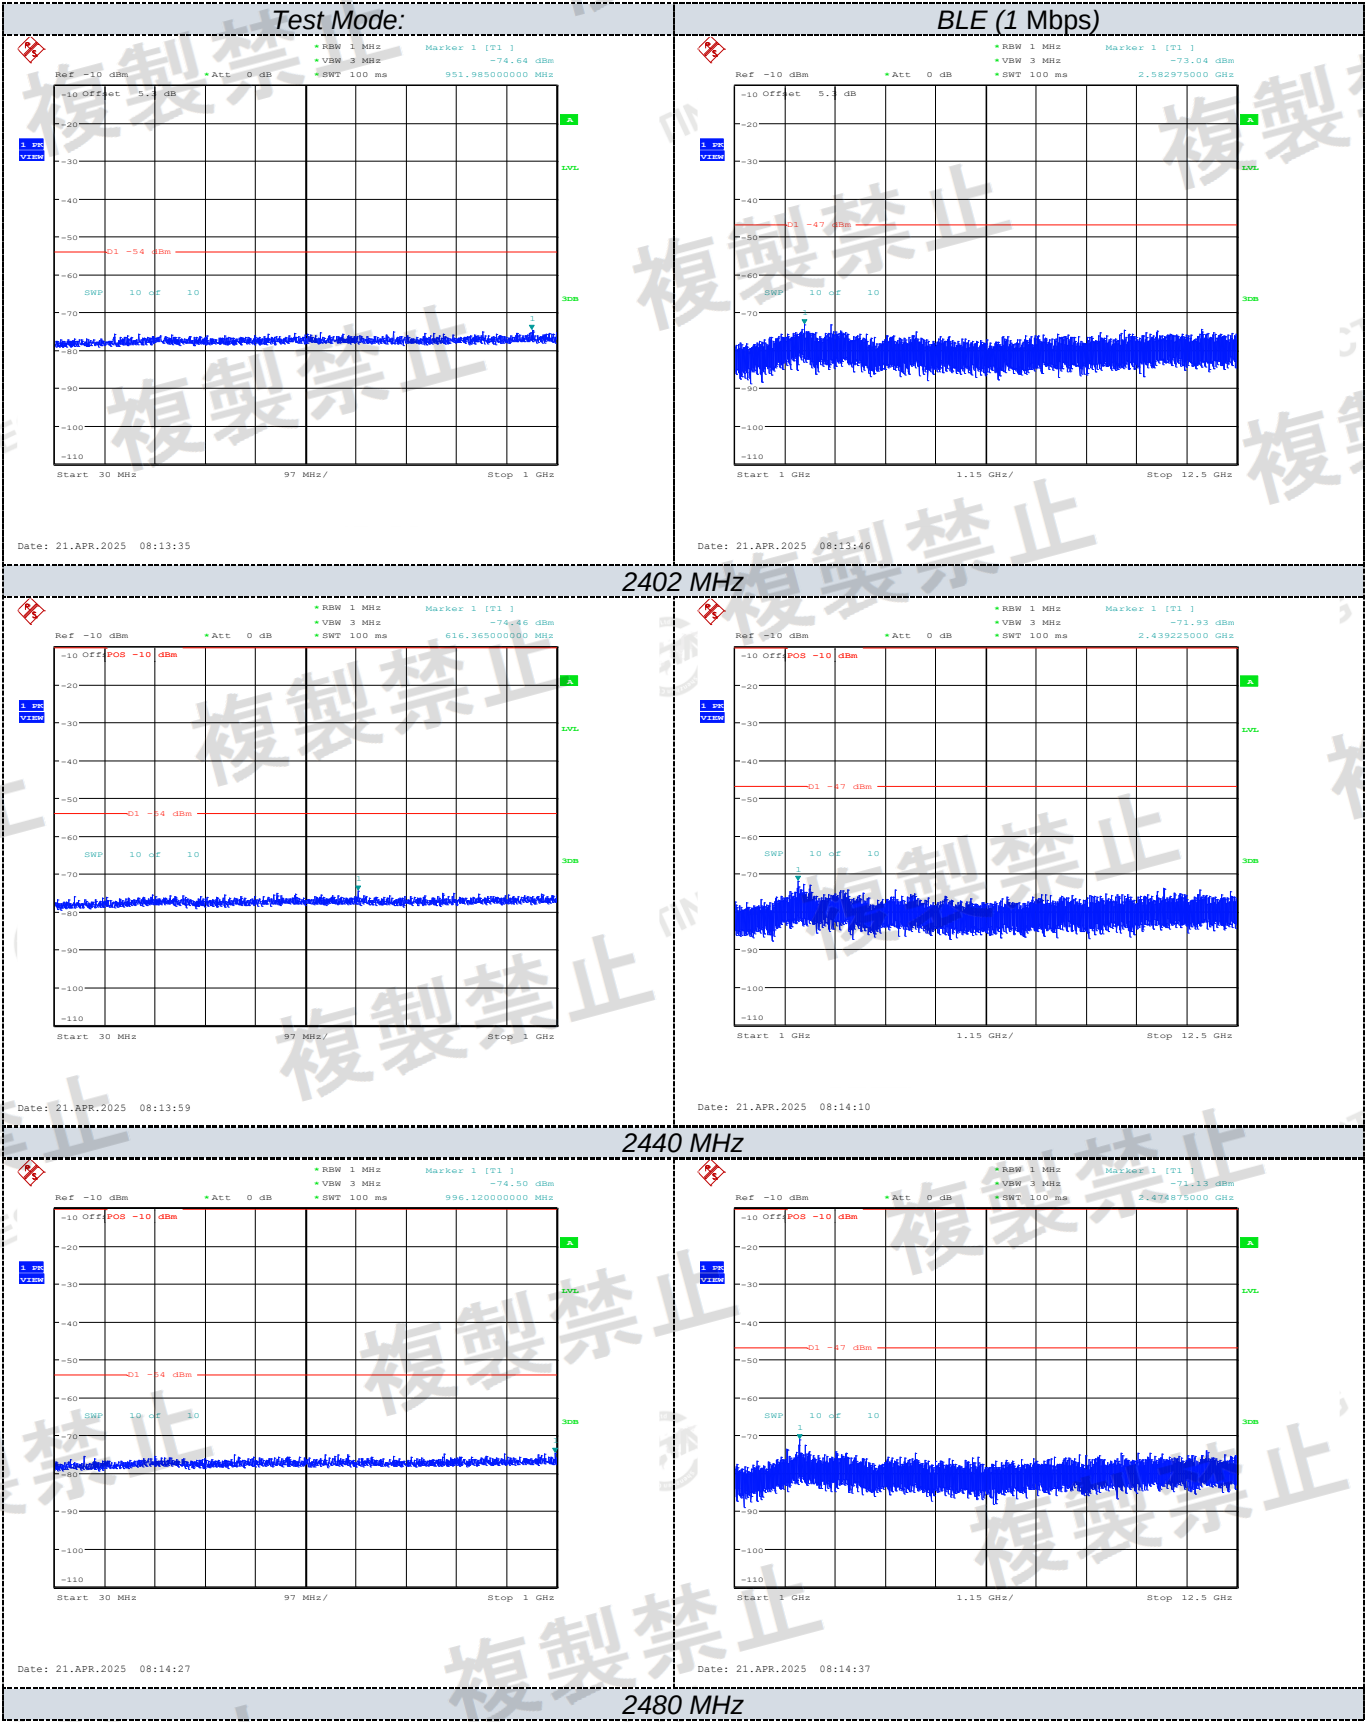


3.6 Construction Protection Method

REQUIREMENT

The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

CONFIRMATION METHOD

Our products apply for RF certification in Japan. The high frequency part and modulation part use SMT technology, which is not easy to change. (The chip has more than 12 chip pins, and the pin distance is less than 1.5mm.)

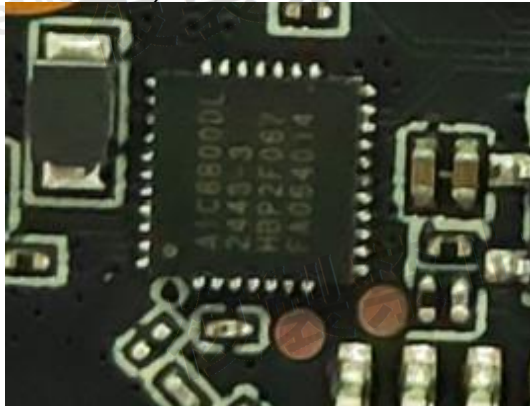

3.7 Interference Prevention Function

REQUIREMENT

Clarify the one automatically to transmit and to receive identification code with the wireless equipment of the wireless station used in the same premises.

Item	Limits
Identification code	≥ 48 bits


CONFIRMATION METHOD

A communication link was made where the ID code is correct (Identical).

TEST PROCEDURE

1. In the case that the EUT has the function of automatically transmitting the identification code: a. Transmit the predetermined identification codes from EUT. b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification code: a. Transmit the predetermined identification codes from the counterpart. b. Check if communication is normal. c. Transmit the other signals than predetermined ID codes from the counterpart. d. check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

TEST CONFIGURATION

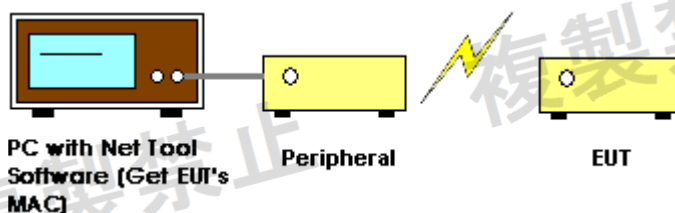

TEST RESULTS

PASS

MAC: A2: 4C: 1B: E5: 6D: C3

3.8 Carrier Sensing Function

LIMIT

Item	Limits
Carrier Sense	Good – EUT stop RF transmission signal after carrier inject to EUT. (On $22.79 + Gr - 20 \cdot \log(f)$ [dBm] (Gr: dBi; f: MHz) or 100mV/m)

INSTRUMENTS SETTING


The following table is the setting of spectrum analyser and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Span	0 MHz
Sweep	Continuous
Detector	Peak
Trigger mode	Video

TEST PROCEDURE

- SSG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SSG and power level is (On $22.79 + Gr - 20 \cdot \log(f)$ [dBm] (Gr: dBi; f: MHz). Then turn off the RF signal of SSG.
- EUT have transmitted the maximum modulation signal and fixed channelize.
- Setting of SA is following as: RB: 1MHz / VB: 1MHz / SPAN: 50MHz / AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak.
- SSG RF Signal On.
- EUT shall be stop the transmitted any signal and SSG RF Signal Off. Then EUT will be continuous transmitted signal.


TEST CONFIGURATION

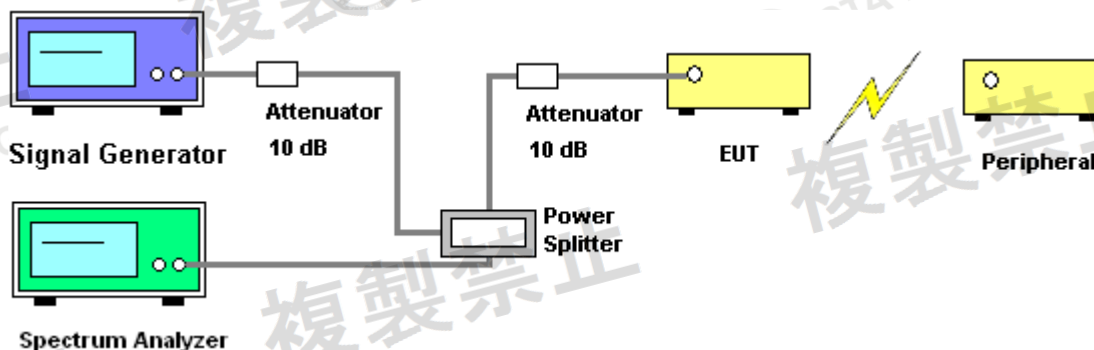



TEST RESULTS




Not Applicable.



4 Test Setup Photos of the EUT



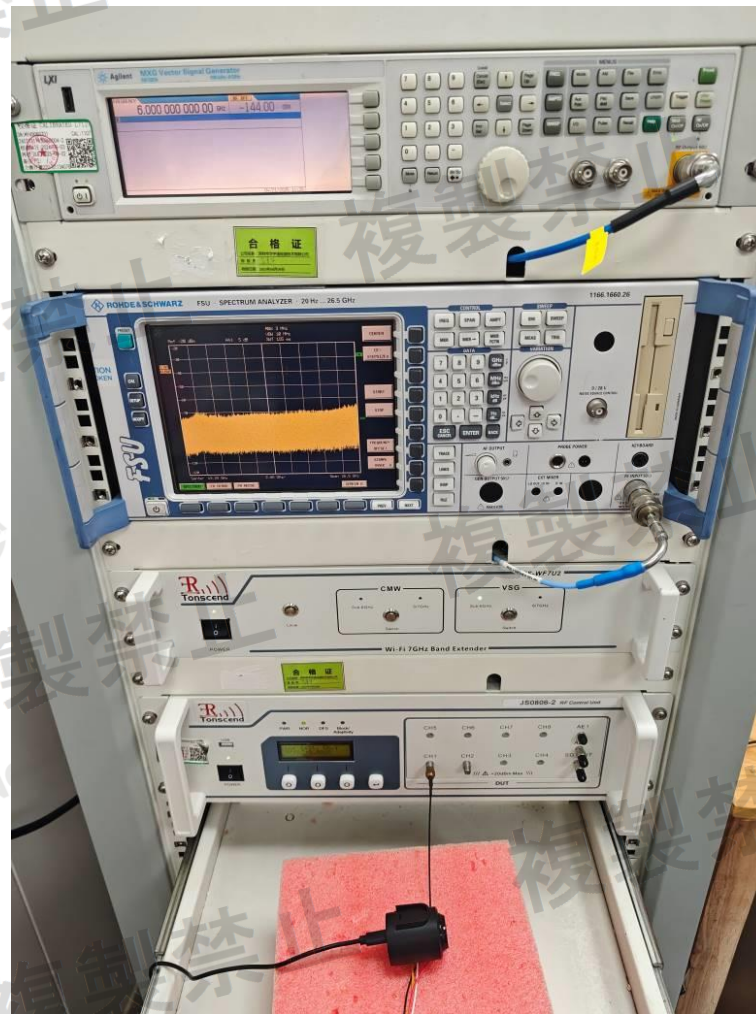





5 Photos of the EUT


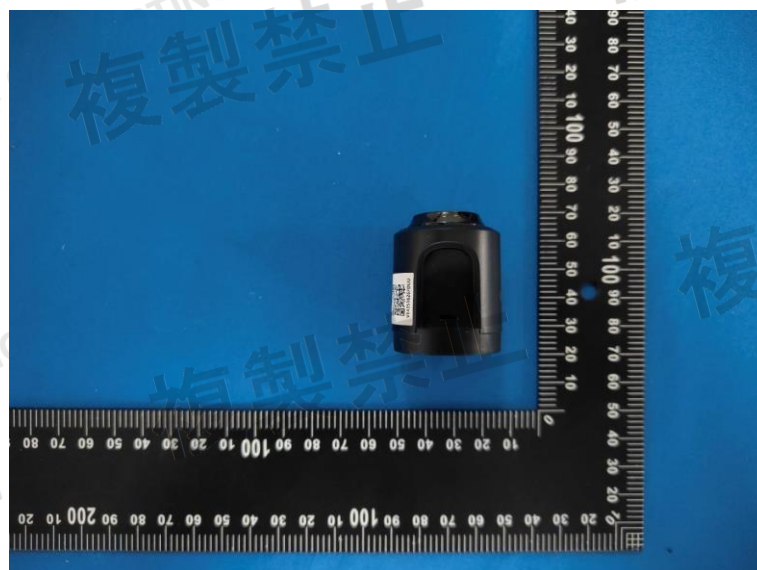
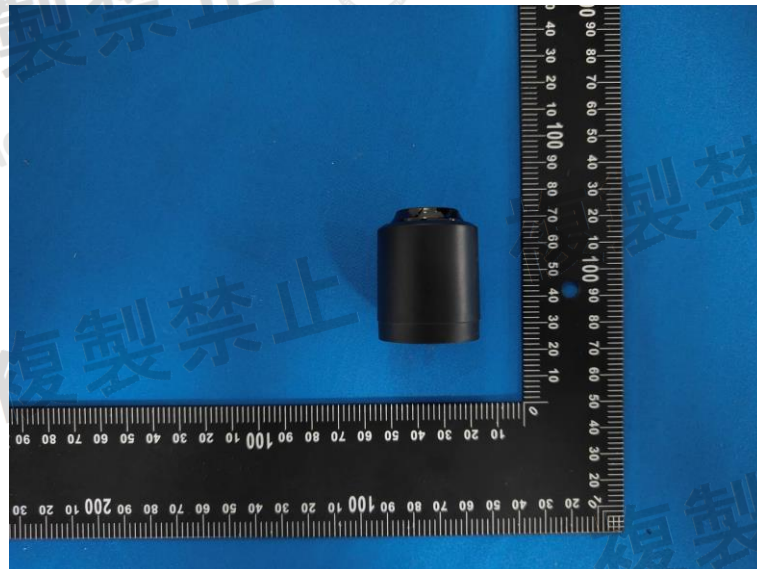


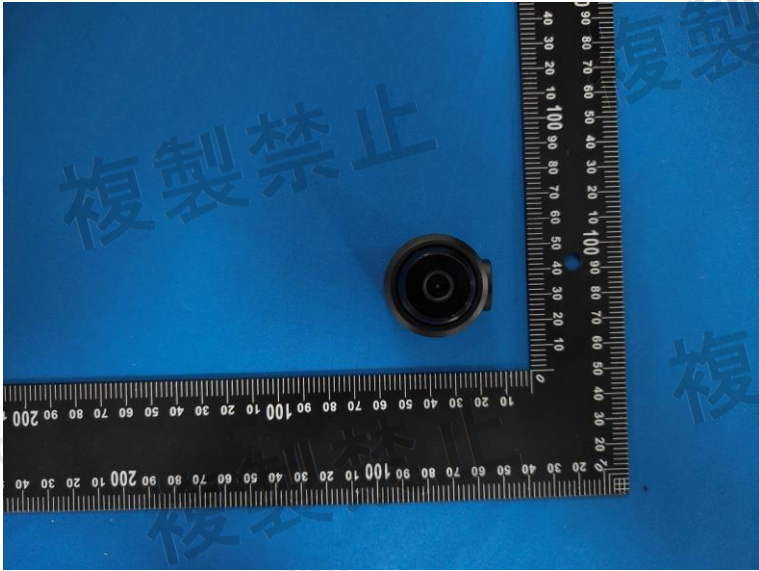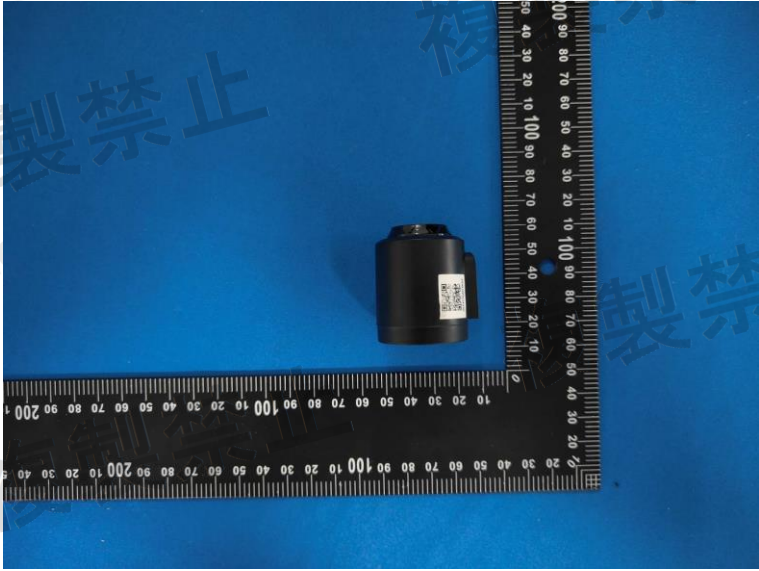
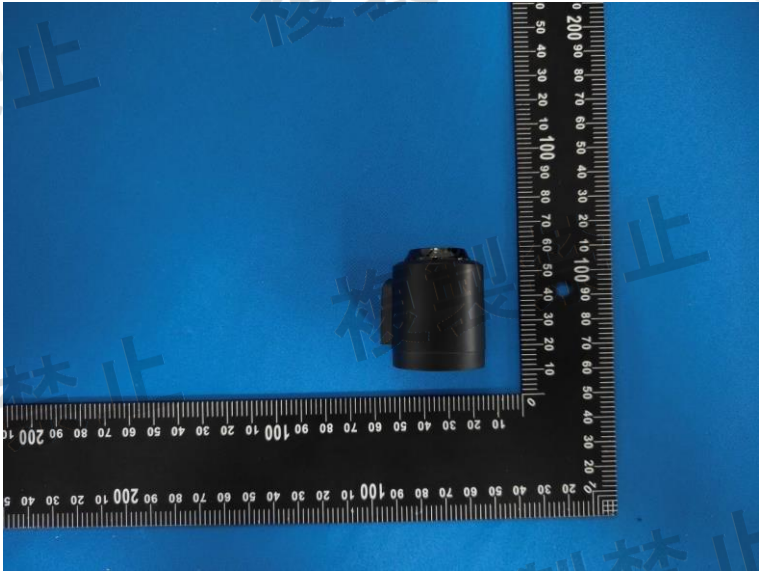


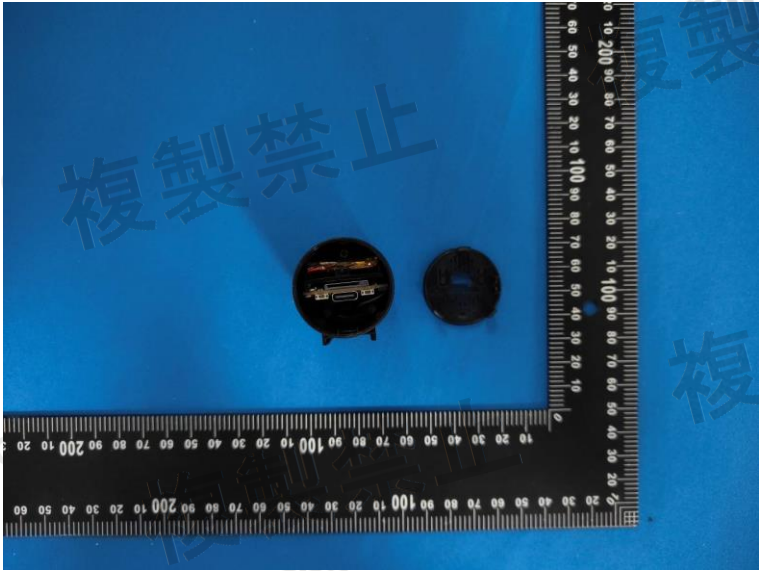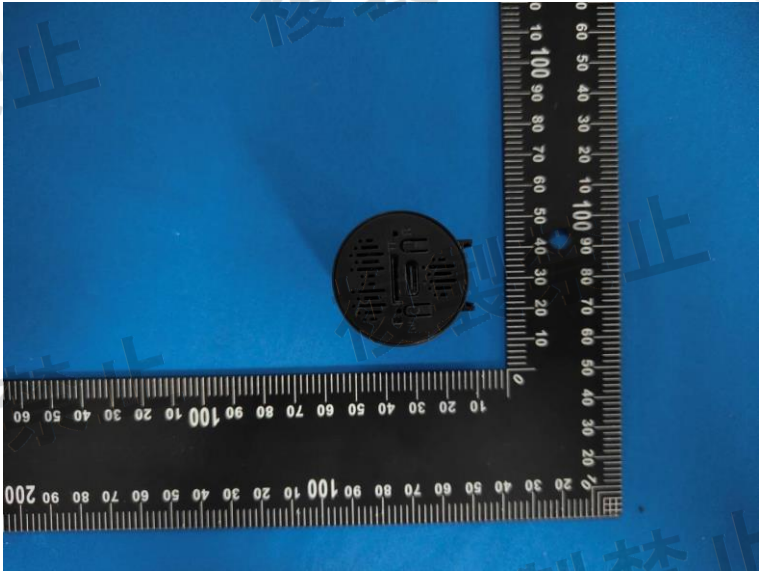

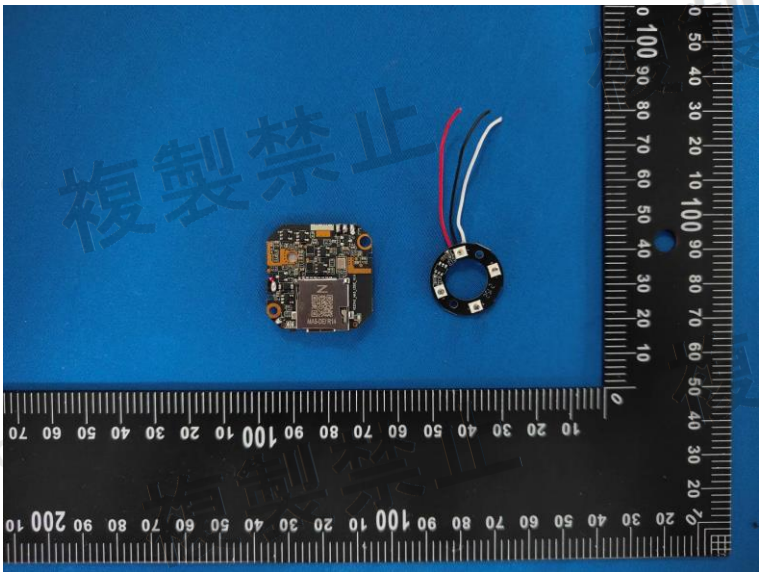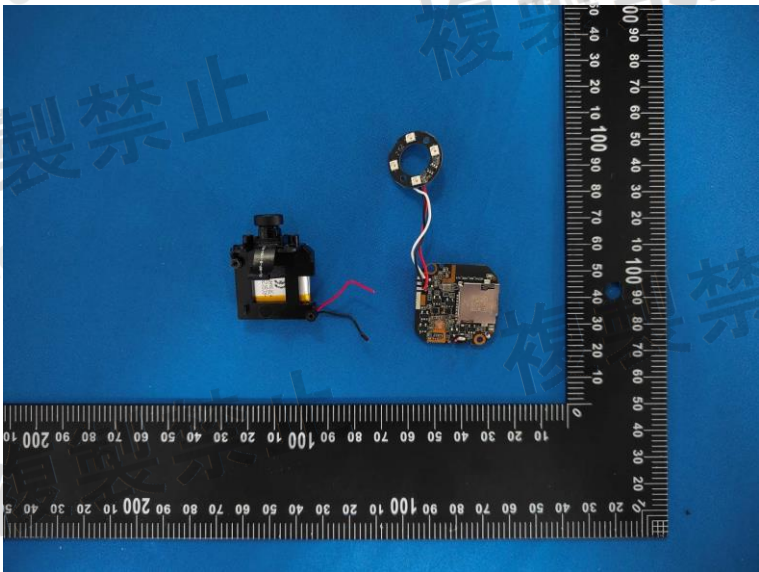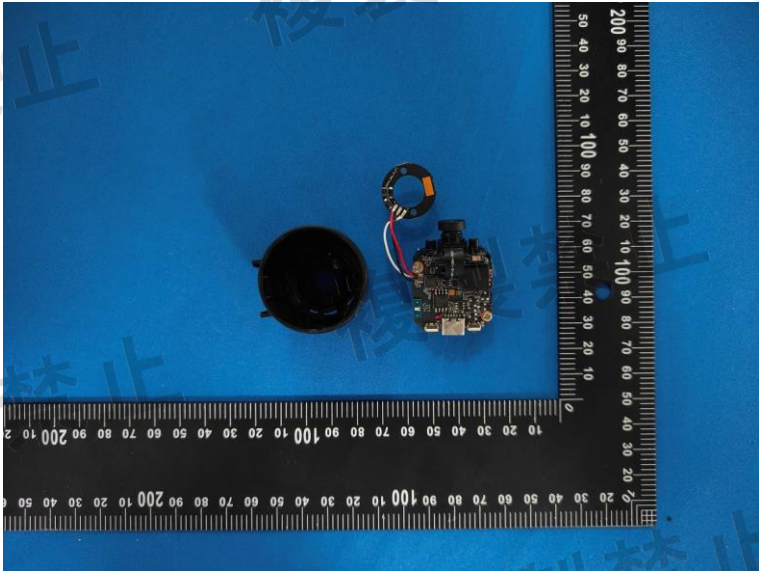

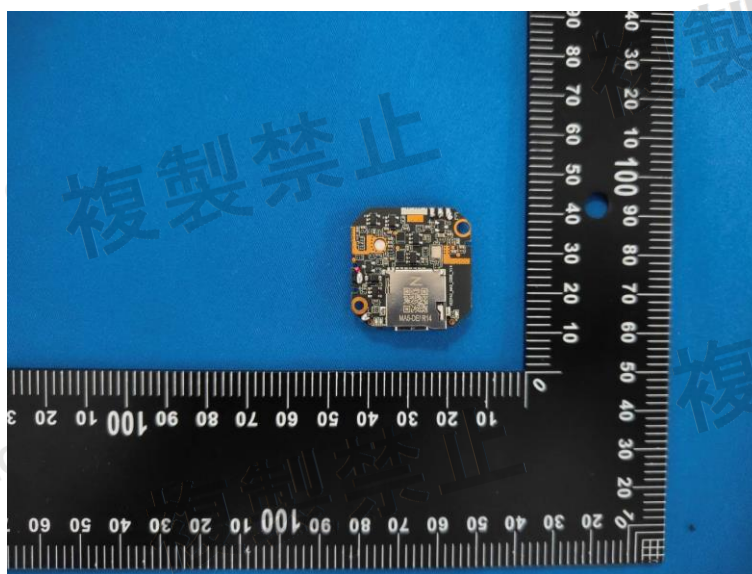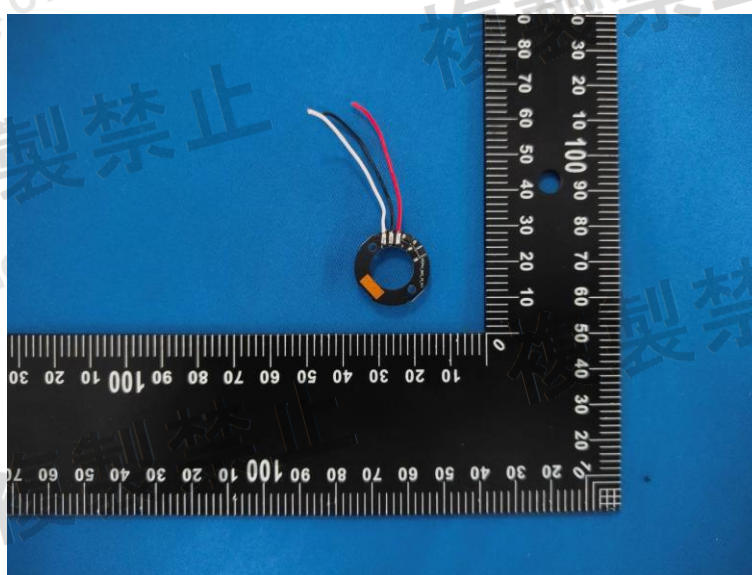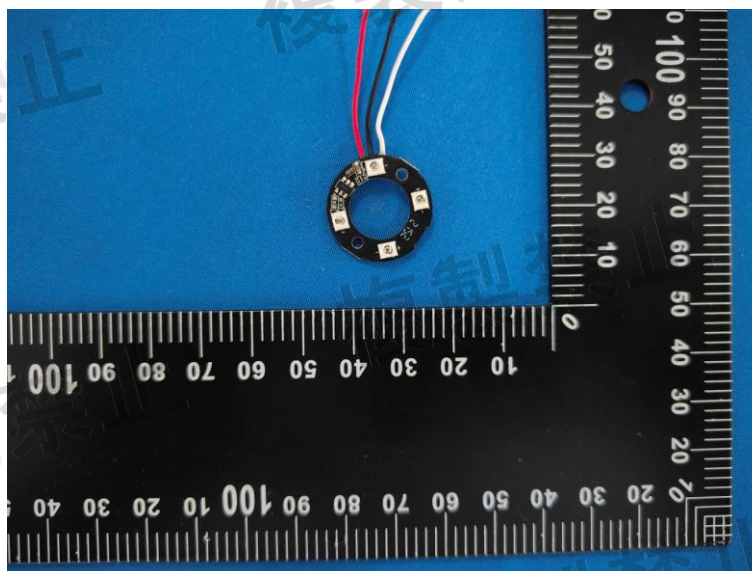

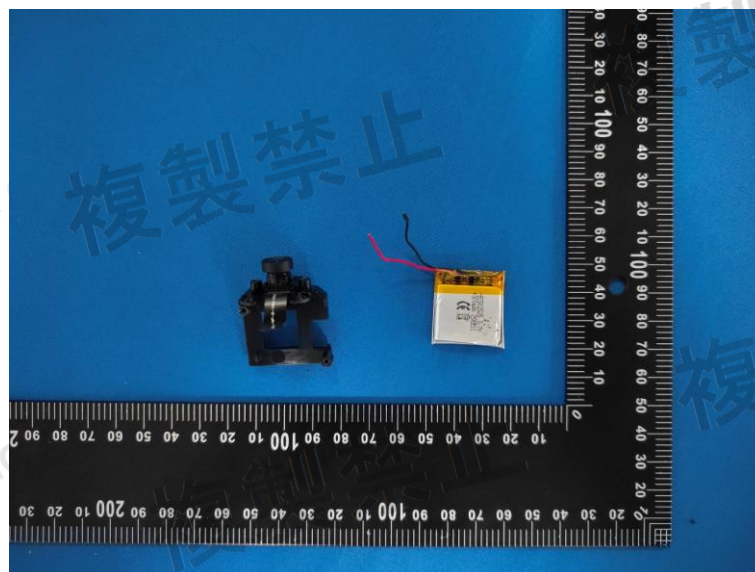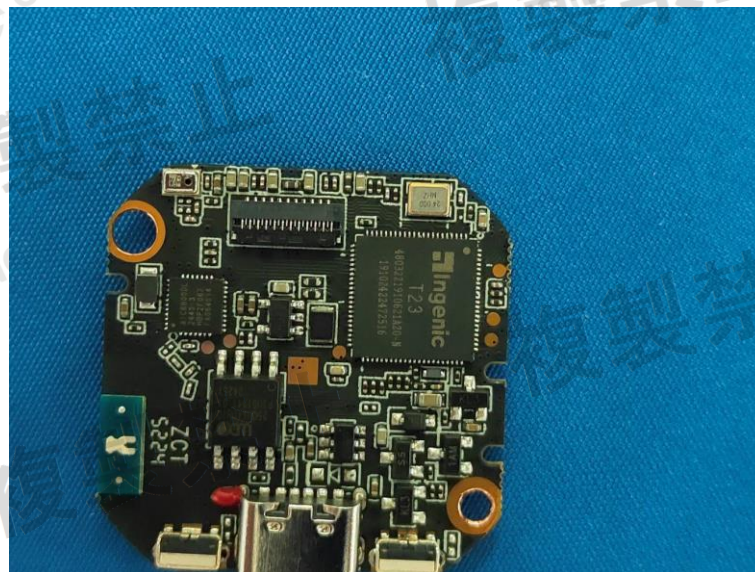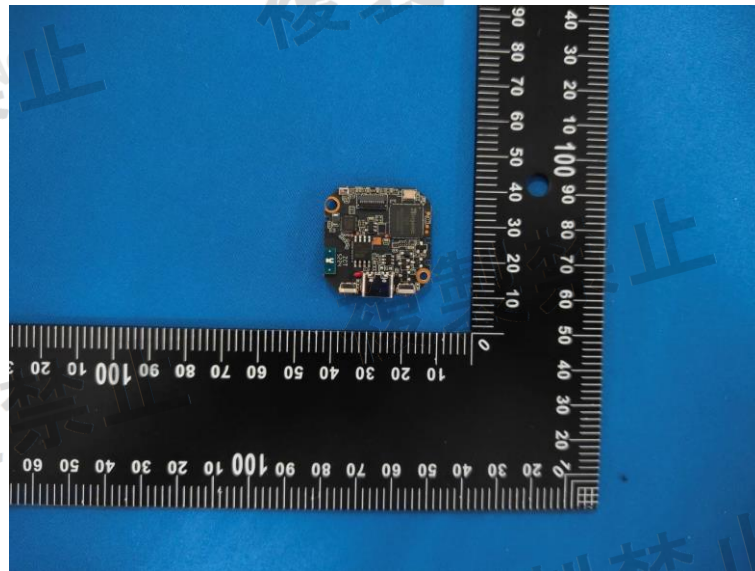

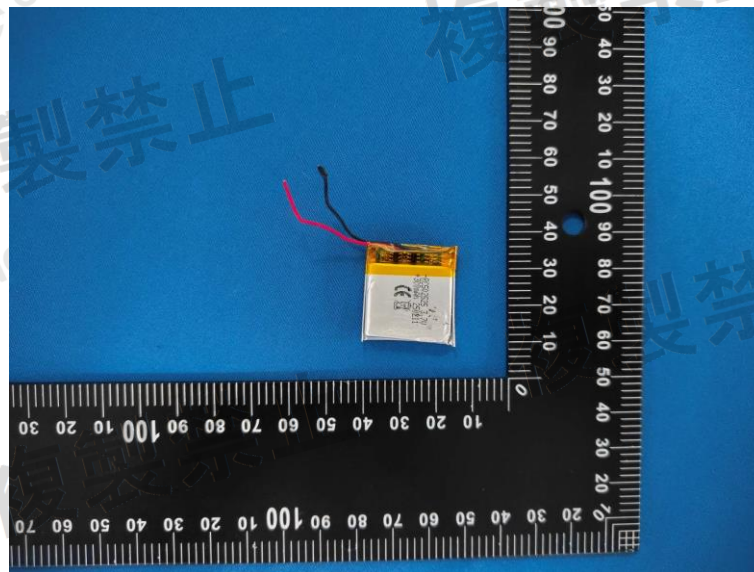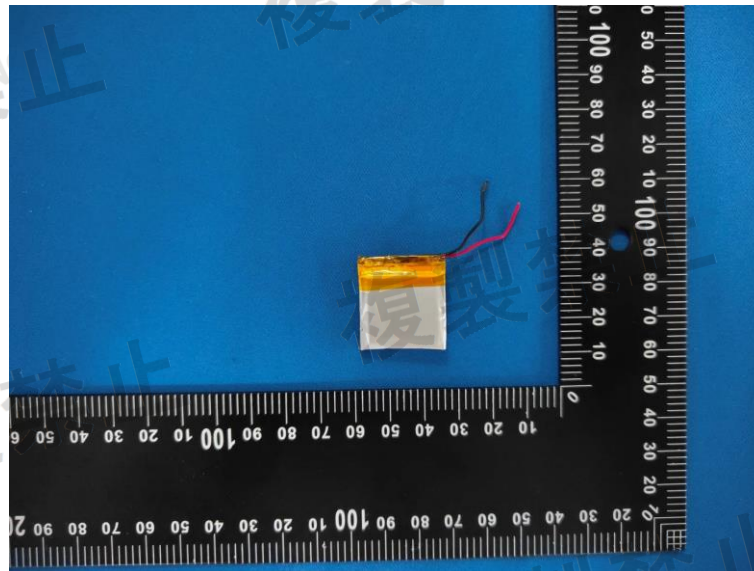

***** End of Report *****