


Site: AC1	Time: 2017/09/04 - 13:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

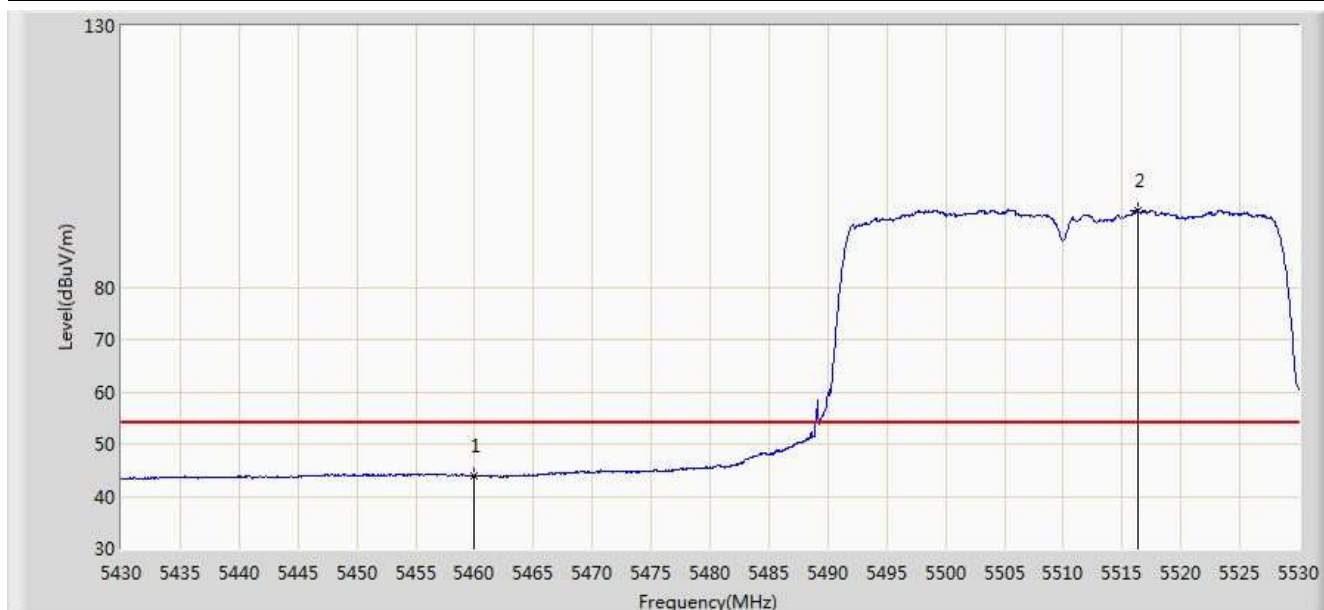


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	43.874	39.694	-10.126	54.000	4.180	AV
2		*	5516.300	94.767	90.447	N/A	N/A	4.320	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 13:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

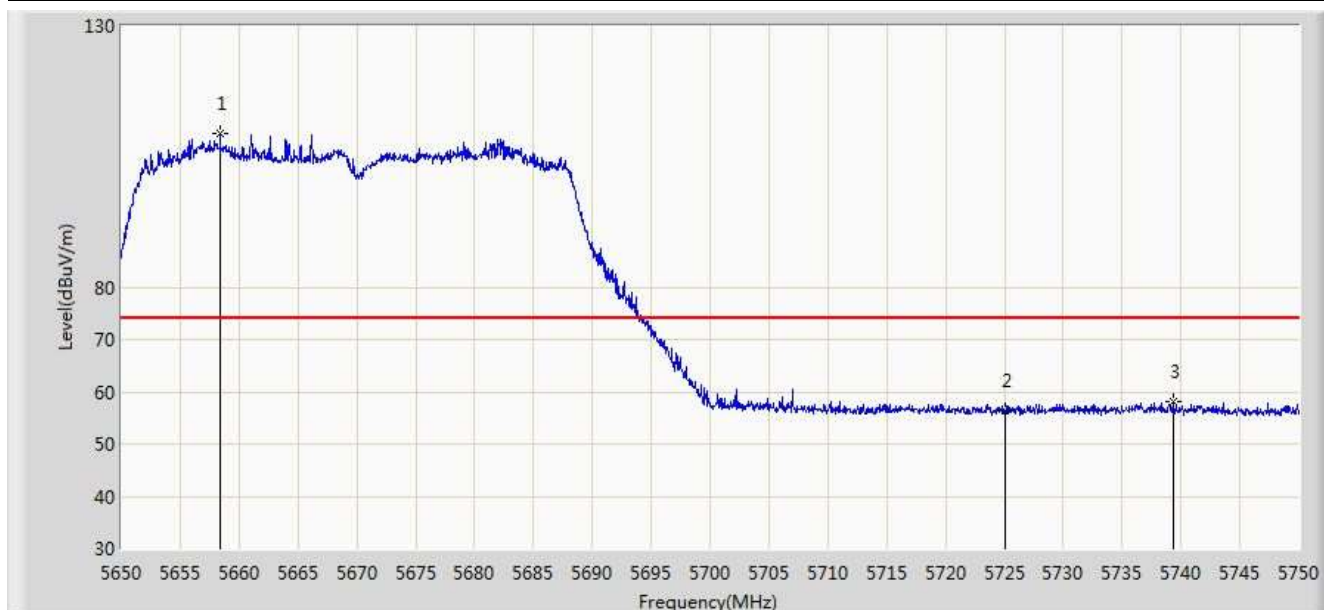


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5658.400	109.459	104.759	N/A	N/A	4.700	PK
2			5725.000	56.370	51.341	-17.630	74.000	5.029	PK
3			5739.300	58.243	53.123	-15.757	74.000	5.120	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 13:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

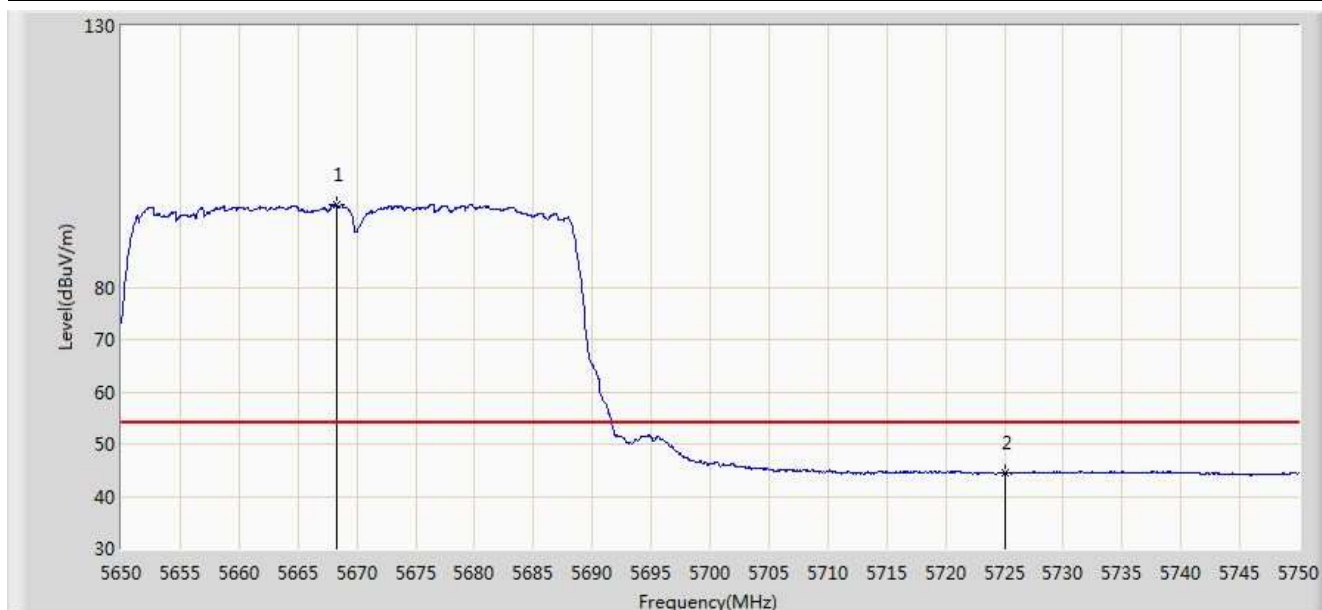


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5668.350	95.829	91.089	N/A	N/A	4.740	AV
2			5725.000	44.523	39.494	-9.477	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 13:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

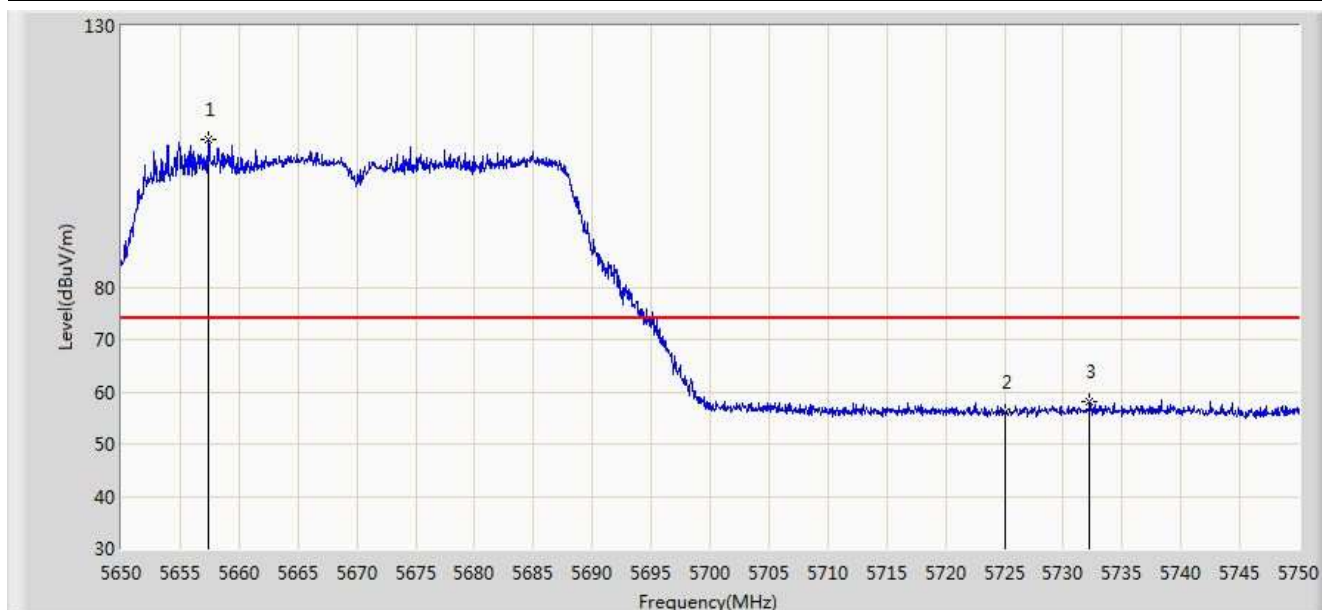


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5657.450	108.358	103.661	N/A	N/A	4.697	PK
2			5725.000	56.221	51.192	-17.779	74.000	5.029	PK
3			5732.250	58.169	53.094	-15.831	74.000	5.076	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 13:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

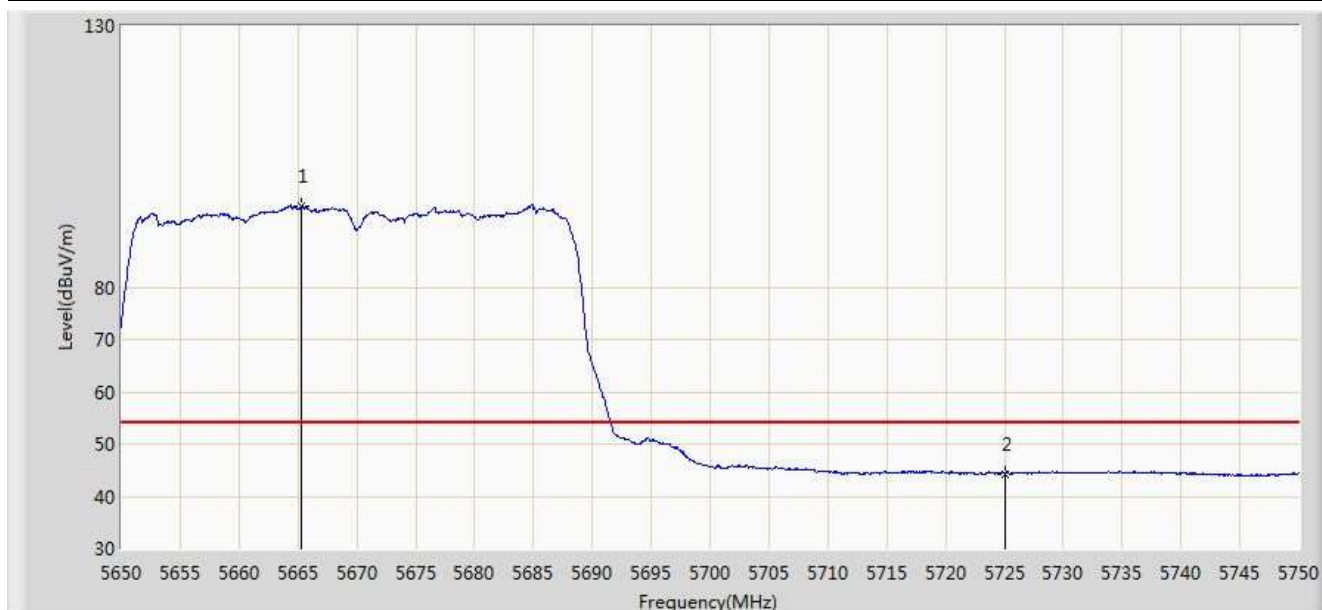


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5665.300	95.390	90.662	N/A	N/A	4.728	AV
2			5725.000	44.285	39.256	-9.715	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 13:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

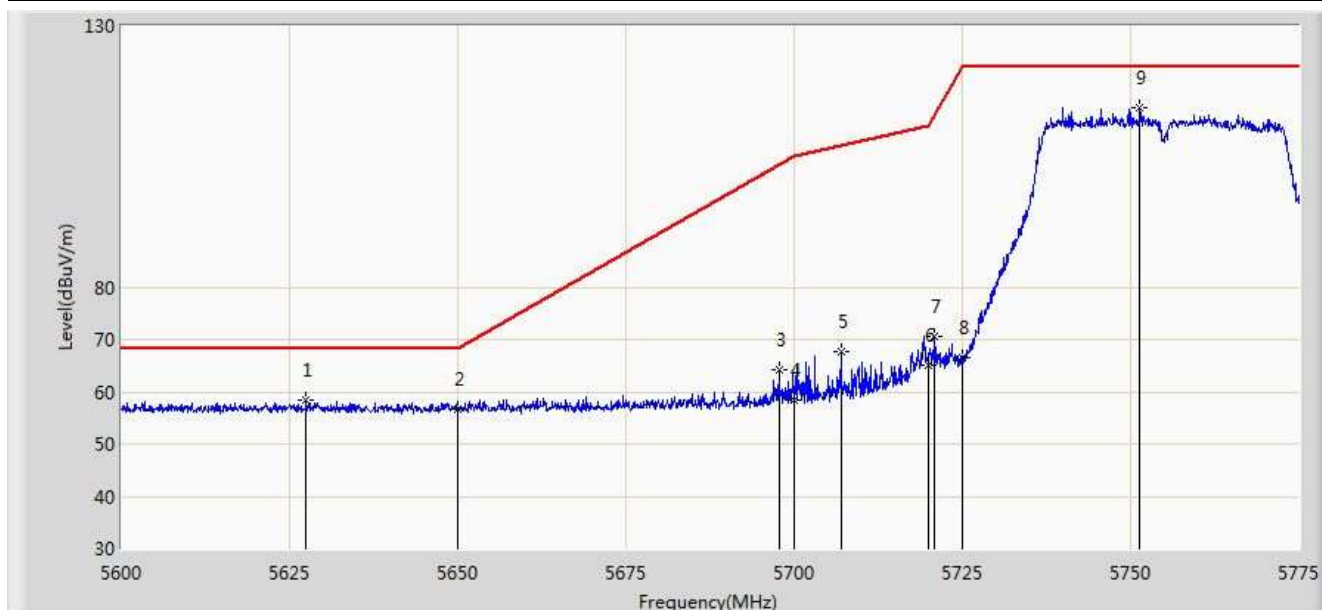


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5627.475	58.399	53.797	-9.801	68.200	4.601	PK
2			5650.000	56.639	51.968	-11.561	68.200	4.671	PK
3			5697.737	64.088	59.222	-39.444	103.532	4.866	PK
4			5700.000	58.467	53.589	-46.733	105.200	4.878	PK
5			5706.925	67.656	62.741	-39.485	107.141	4.915	PK
6			5720.000	65.110	60.113	-45.690	110.800	4.997	PK
7			5720.925	70.630	65.627	-42.280	112.910	5.003	PK
8			5725.000	66.506	61.477	-55.694	122.200	5.029	PK
9		*	5751.375	114.286	109.095	N/A	N/A	5.191	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 13:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

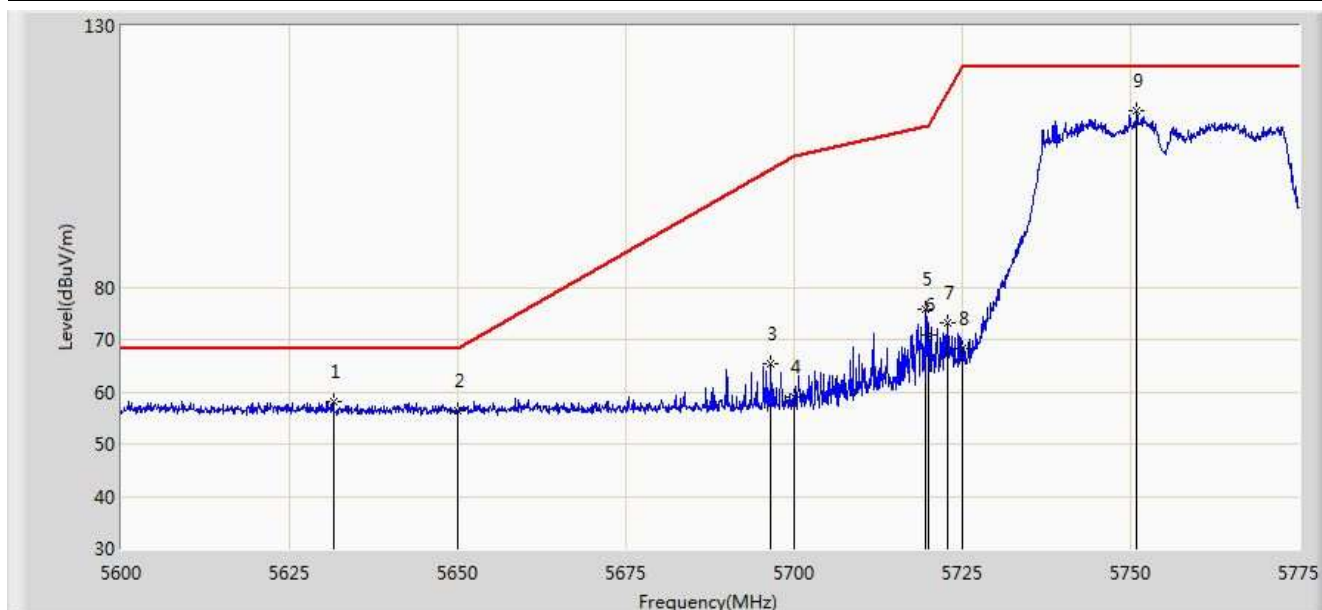


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.500	57.991	53.378	-10.209	68.200	4.613	PK
2			5650.000	56.253	51.582	-11.947	68.200	4.671	PK
3			5696.600	65.391	60.531	-37.303	102.694	4.860	PK
4			5700.000	59.016	54.138	-46.184	105.200	4.878	PK
5			5719.612	75.746	70.752	-34.945	110.692	4.994	PK
6			5720.000	70.912	65.915	-39.888	110.800	4.997	PK
7			5722.850	73.206	68.191	-44.093	117.299	5.015	PK
8			5725.000	68.348	63.319	-53.852	122.200	5.029	PK
9		*	5750.937	113.848	108.659	N/A	N/A	5.188	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 13:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

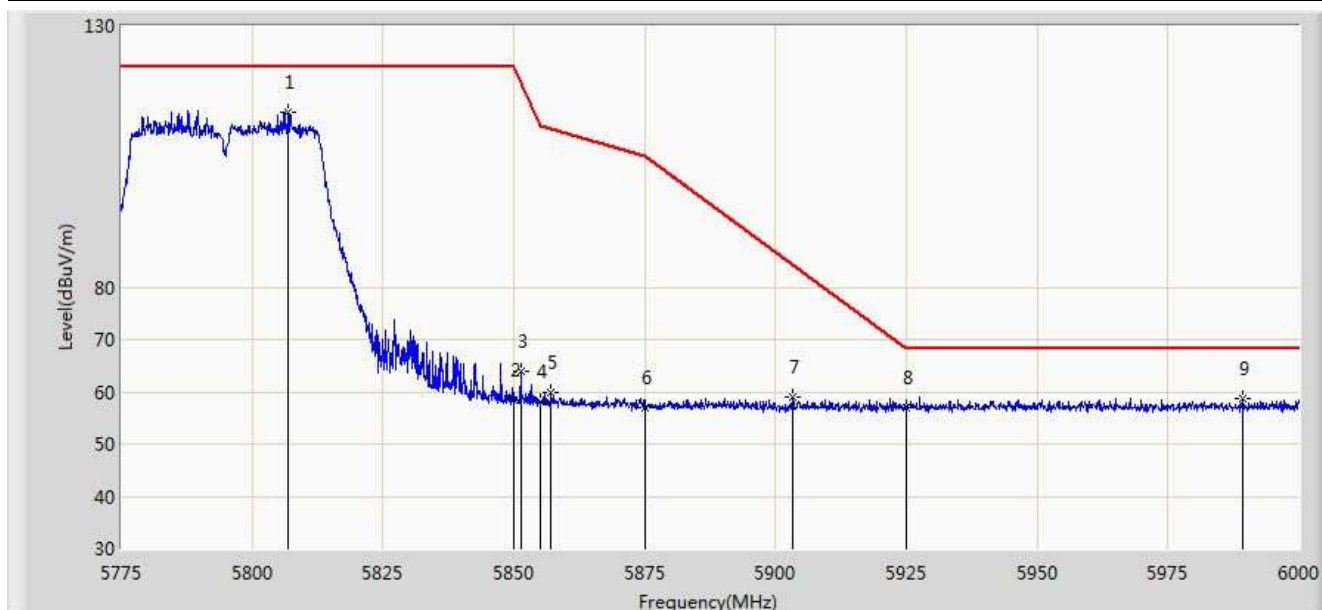


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5806.837	113.389	107.906	N/A	N/A	5.483	PK
2			5850.000	58.441	52.715	-63.759	122.200	5.726	PK
3			5851.275	63.906	58.175	-55.386	119.292	5.731	PK
4			5855.000	58.097	52.351	-52.703	110.800	5.746	PK
5			5857.125	59.733	53.978	-50.471	110.204	5.755	PK
6			5875.000	56.952	51.132	-48.248	105.200	5.820	PK
7			5903.362	58.862	52.950	-25.312	84.174	5.912	PK
8			5925.000	57.059	51.093	-11.141	68.200	5.967	PK
9			5989.425	58.749	52.656	-9.451	68.200	6.093	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 13:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

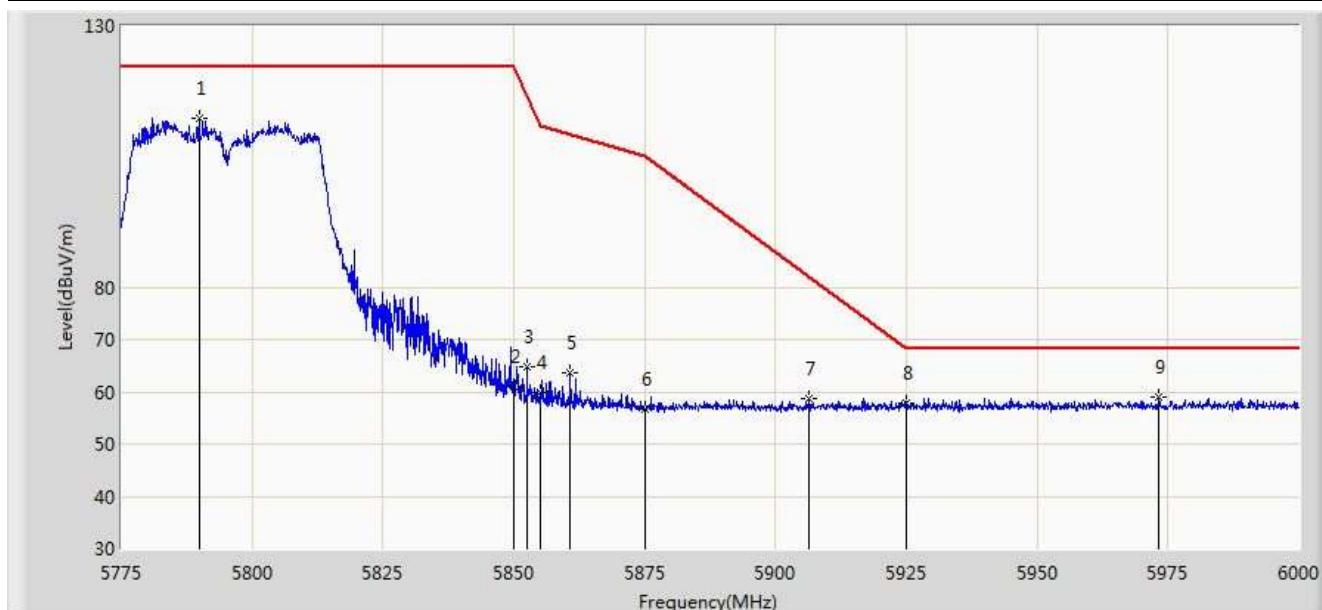


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5789.850	112.242	106.851	N/A	N/A	5.392	PK
2			5850.000	61.143	55.417	-61.057	122.200	5.726	PK
3			5852.513	64.670	58.934	-51.799	116.469	5.736	PK
4			5855.000	59.883	54.137	-50.917	110.800	5.746	PK
5			5860.837	63.688	57.918	-45.475	109.164	5.770	PK
6			5875.000	56.763	50.943	-48.437	105.200	5.820	PK
7			5906.513	58.797	52.877	-23.047	81.844	5.920	PK
8			5925.000	57.742	51.776	-10.458	68.200	5.967	PK
9		*	5973.337	59.096	53.030	-9.104	68.200	6.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

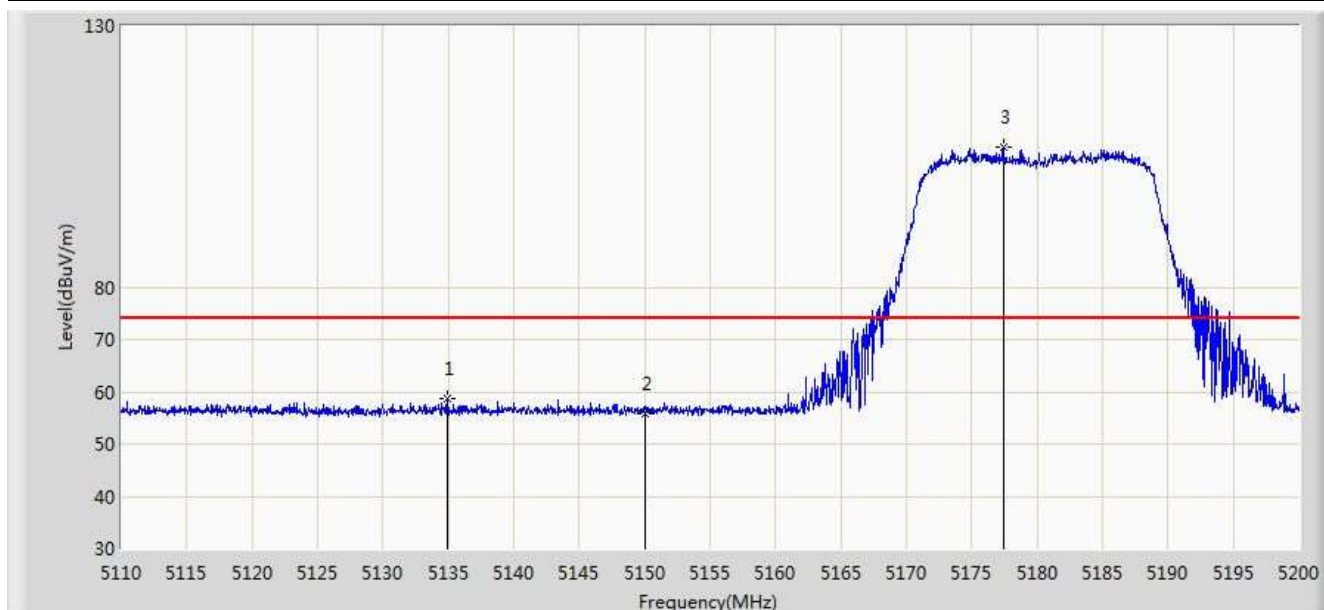


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.975	58.646	54.471	-15.354	74.000	4.175	PK
2			5150.000	55.871	51.702	-18.129	74.000	4.170	PK
3		*	5177.410	106.827	102.749	N/A	N/A	4.078	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

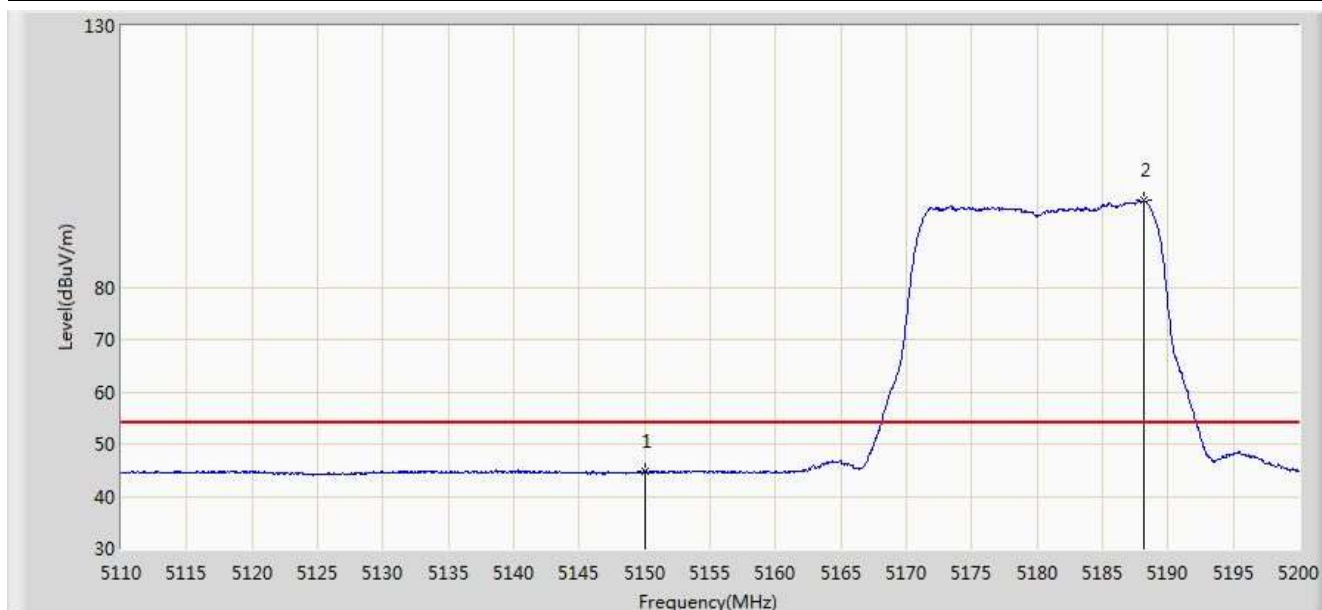


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.674	40.505	-9.326	54.000	4.170	AV
2		*	5188.120	96.560	92.520	N/A	N/A	4.040	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

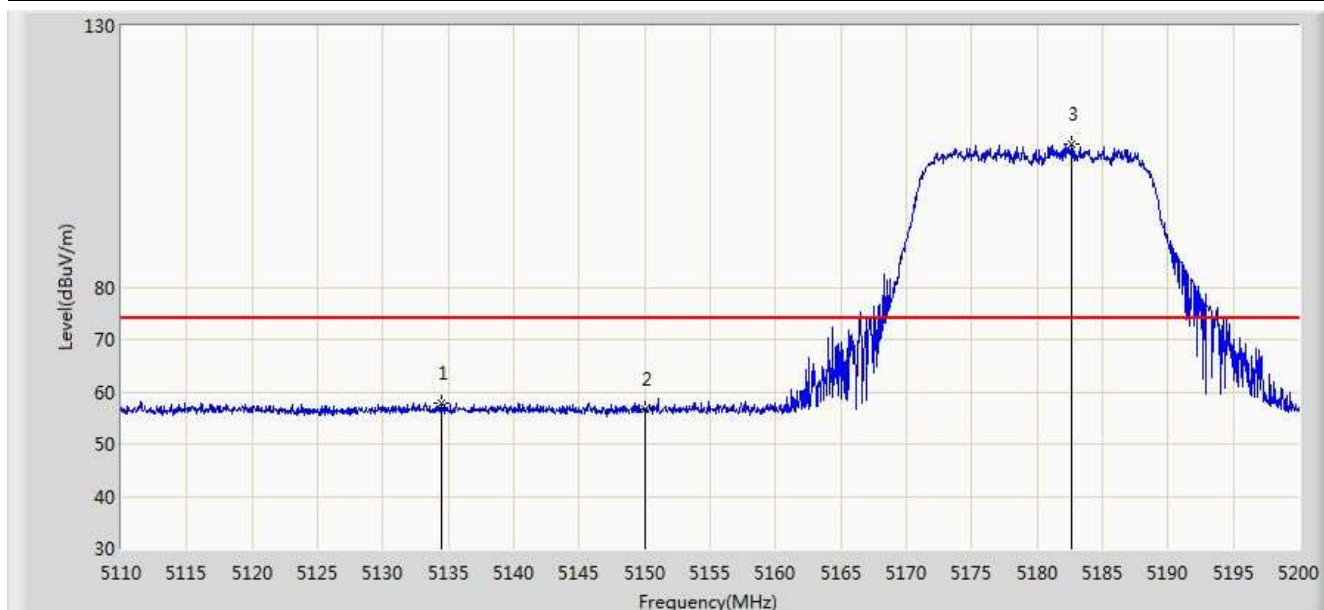


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.435	57.941	53.766	-16.059	74.000	4.175	PK
2			5150.000	56.707	52.538	-17.293	74.000	4.170	PK
3		*	5182.675	107.333	103.274	N/A	N/A	4.060	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

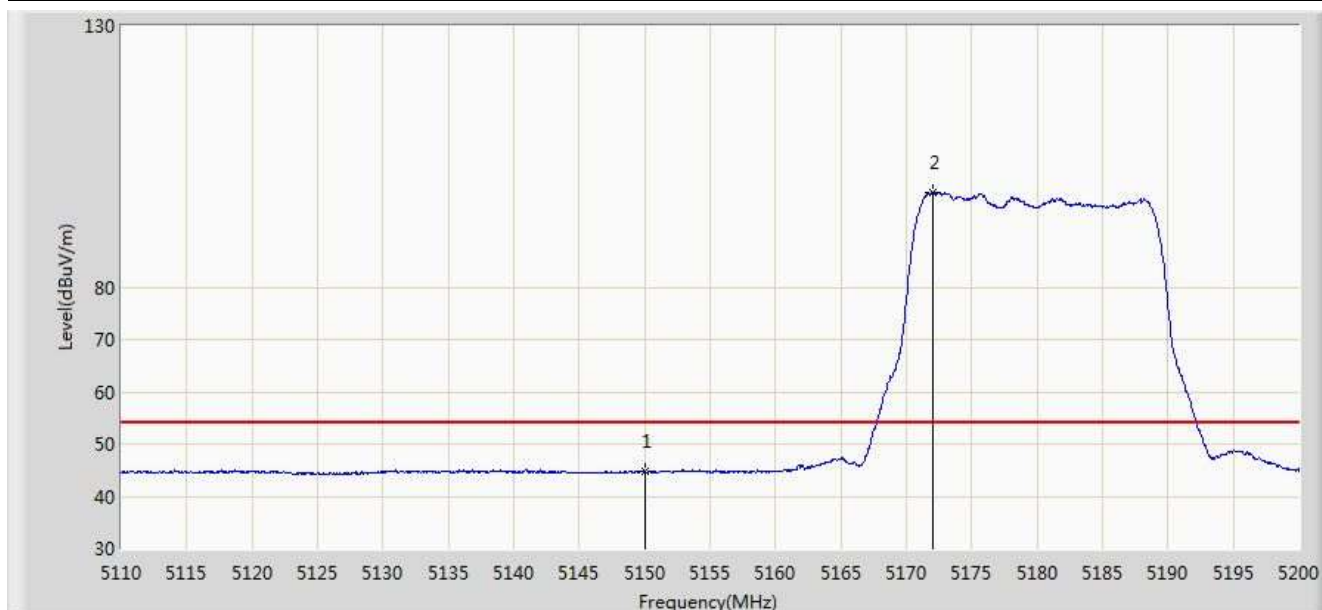


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.643	40.474	-9.357	54.000	4.170	AV
2		*	5172.010	98.049	93.952	N/A	N/A	4.097	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

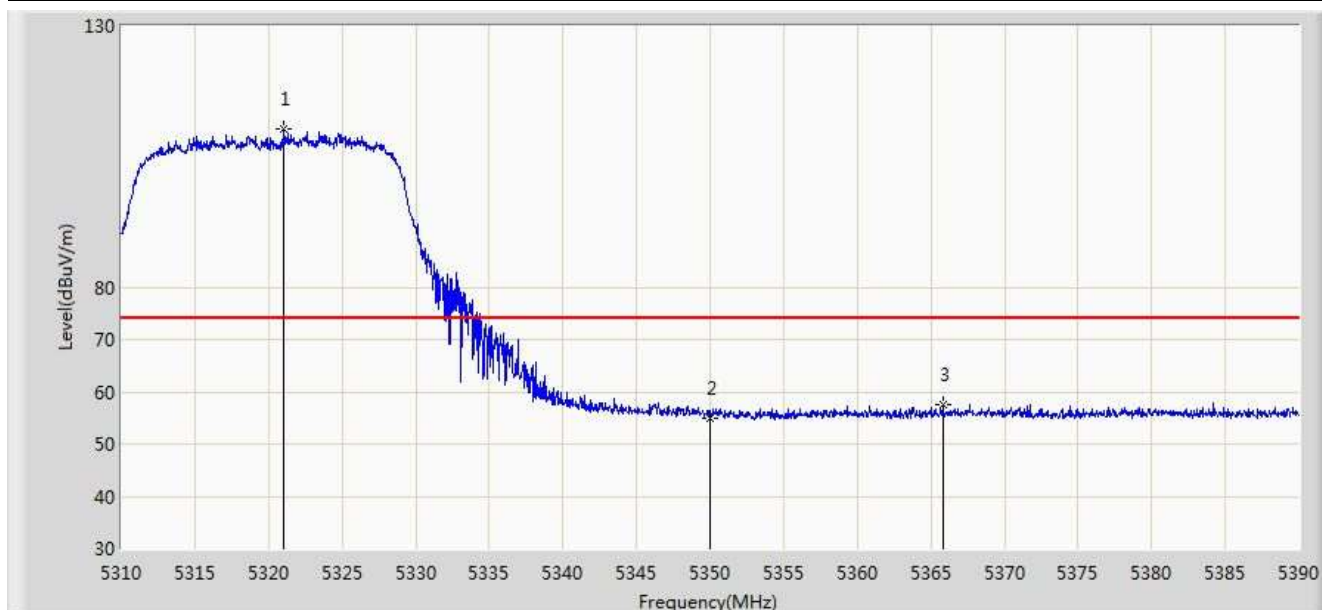


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.040	110.150	106.299	N/A	N/A	3.851	PK
2			5350.000	55.002	51.097	-18.998	74.000	3.904	PK
3			5365.800	57.548	53.615	-16.452	74.000	3.932	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

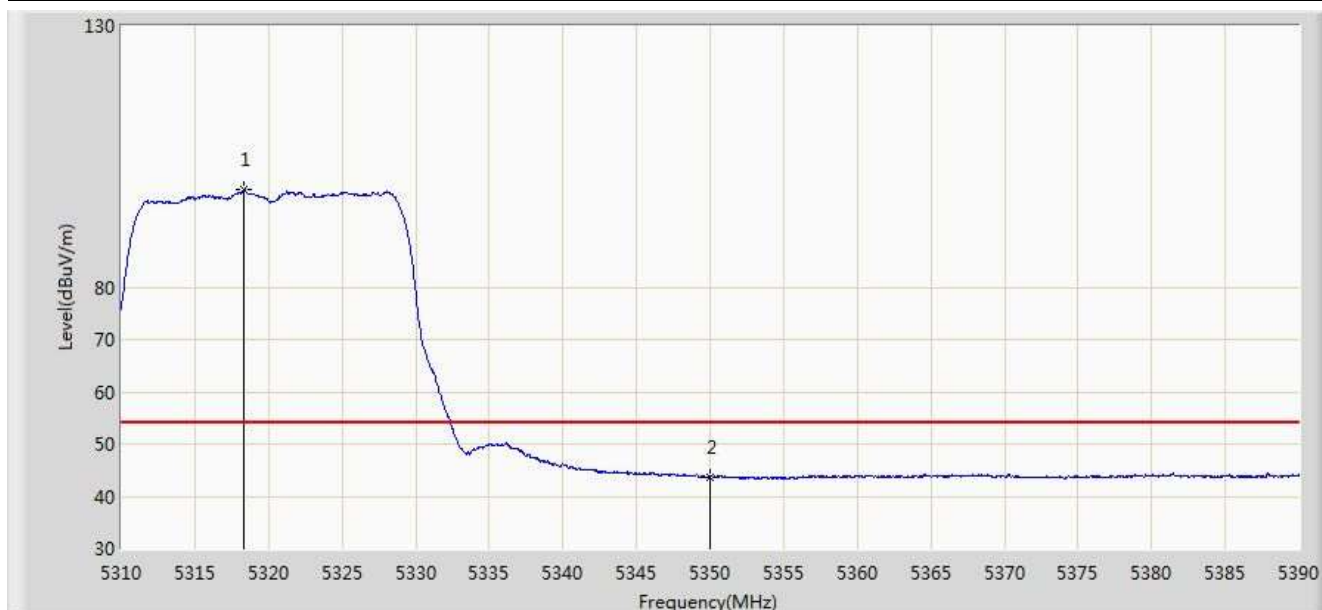


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.360	98.583	94.738	N/A	N/A	3.845	AV
2			5350.000	43.679	39.774	-10.321	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

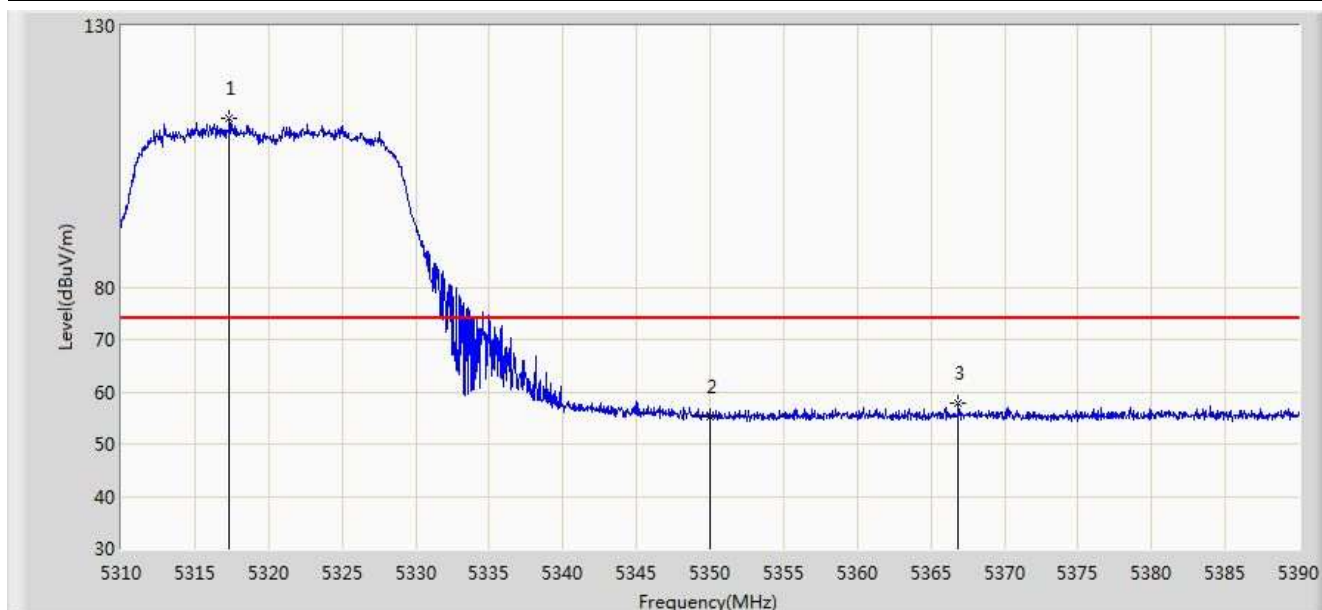


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.320	112.345	108.502	N/A	N/A	3.844	PK
2			5350.000	55.258	51.353	-18.742	74.000	3.904	PK
3			5366.880	57.734	53.799	-16.266	74.000	3.934	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

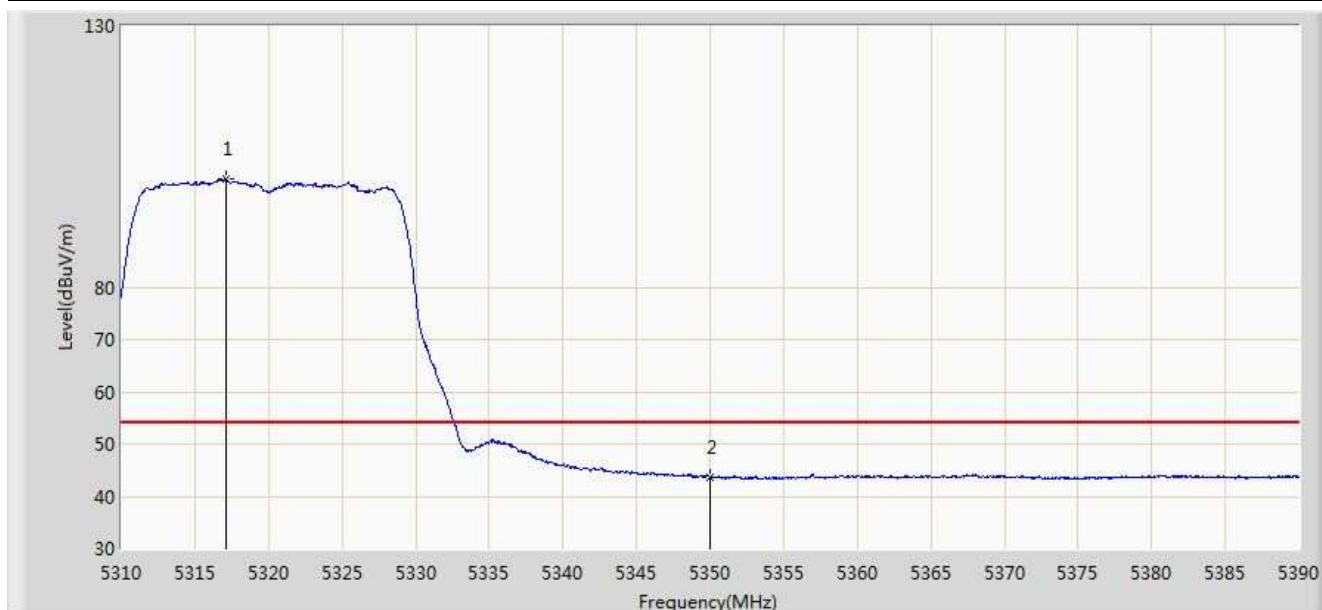


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.120	100.632	96.789	N/A	N/A	3.842	AV
2			5350.000	43.662	39.757	-10.338	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 16:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

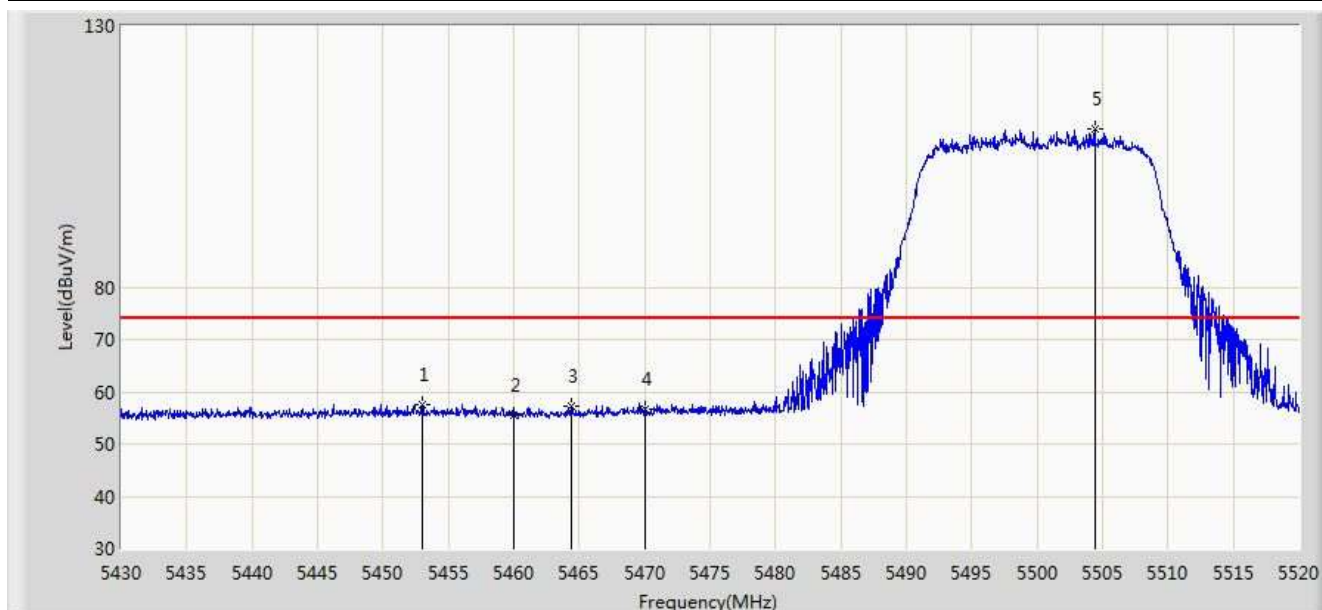


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.040	57.657	53.492	-16.343	74.000	4.164	PK
2			5460.000	55.652	51.472	-18.348	74.000	4.180	PK
3			5464.425	57.338	53.148	-16.662	74.000	4.190	PK
4			5470.000	56.683	52.481	-17.317	74.000	4.202	PK
5		*	5504.385	110.189	105.904	N/A	N/A	4.284	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

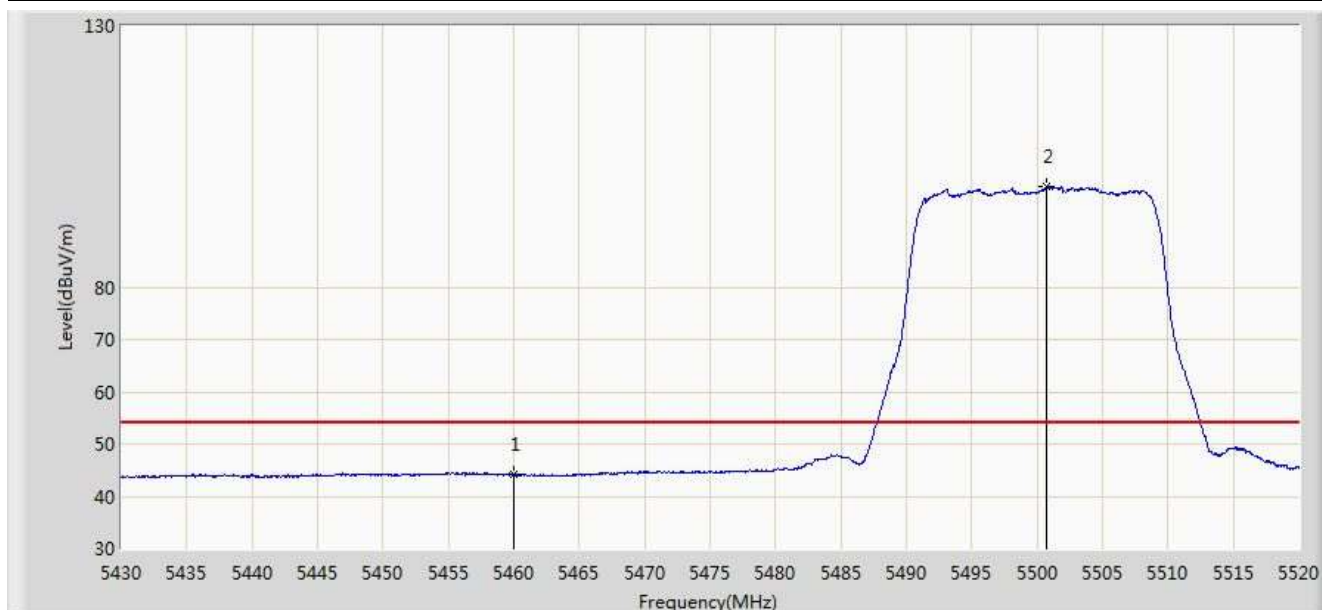


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.145	39.965	-9.855	54.000	4.180	AV
2		*	5500.695	99.249	94.975	N/A	N/A	4.274	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

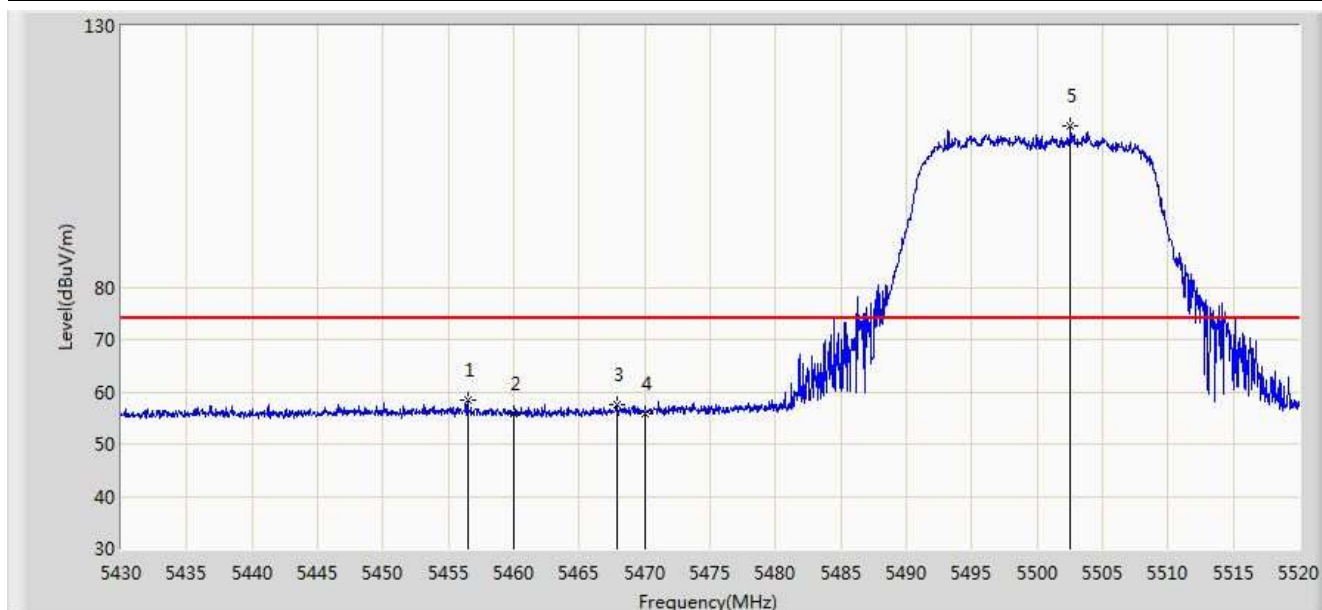


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.460	58.506	54.333	-15.494	74.000	4.172	PK
2			5460.000	55.896	51.716	-18.104	74.000	4.180	PK
3			5467.845	57.483	53.285	-16.517	74.000	4.198	PK
4			5470.000	55.898	51.696	-18.102	74.000	4.202	PK
5		*	5502.540	110.905	106.626	N/A	N/A	4.279	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

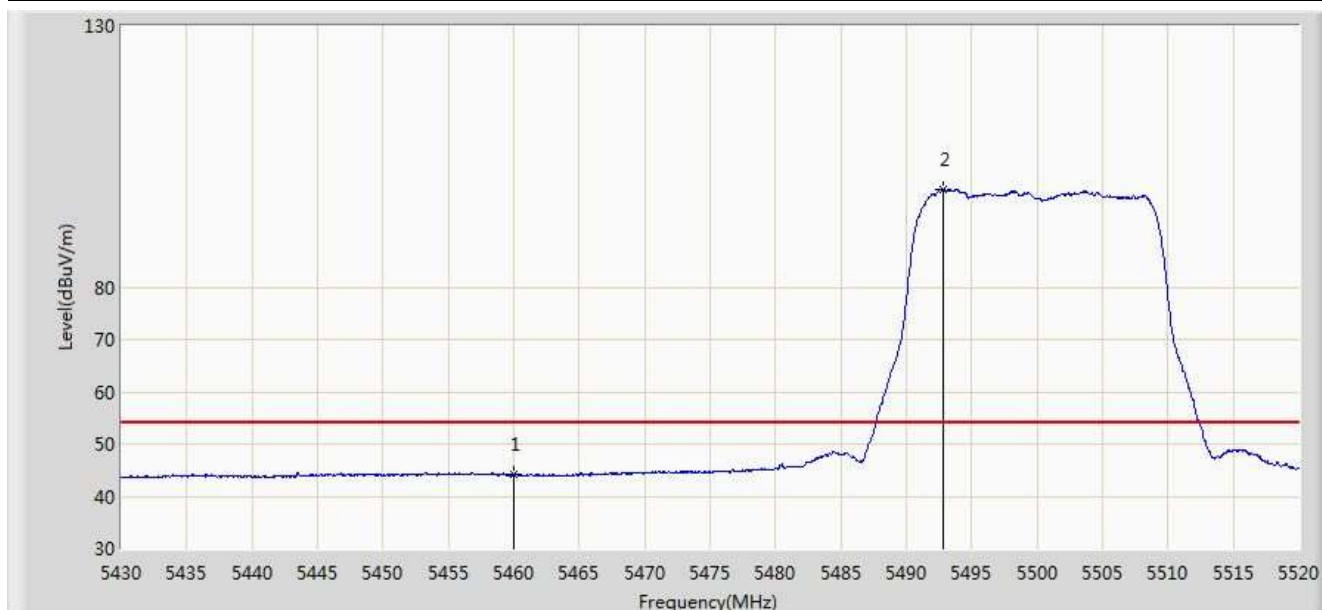


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.145	39.965	-9.855	54.000	4.180	AV
2		*	5492.865	98.760	94.506	N/A	N/A	4.254	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

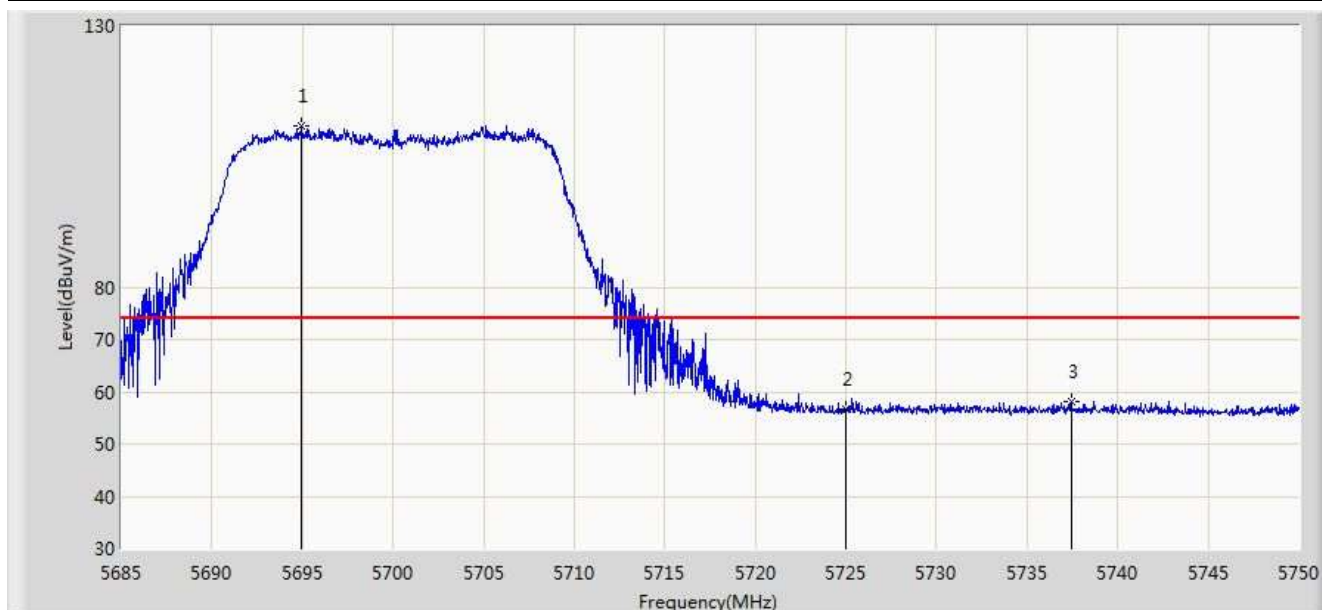


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.945	110.727	105.876	N/A	N/A	4.851	PK
2			5725.000	56.553	51.524	-17.447	74.000	5.029	PK
3			5737.455	58.223	53.115	-15.777	74.000	5.108	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

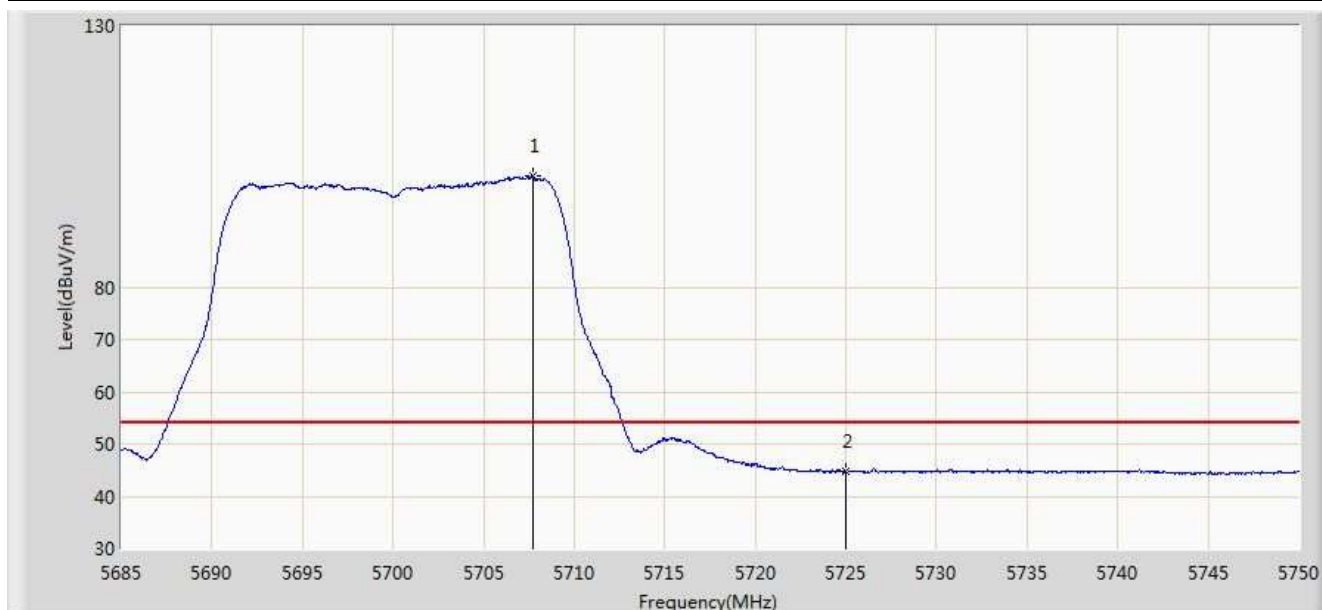


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5707.685	101.271	96.352	N/A	N/A	4.918	AV
2			5725.000	44.654	39.625	-9.346	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

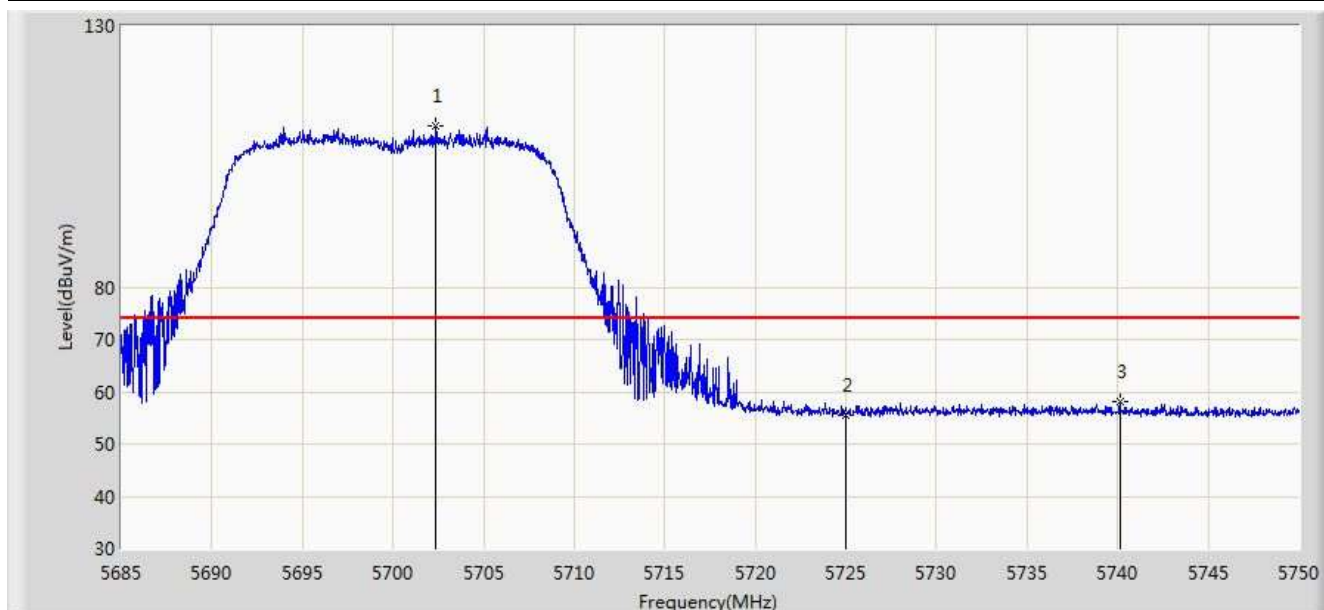


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.355	110.767	105.876	N/A	N/A	4.891	PK
2			5725.000	55.648	50.619	-18.352	74.000	5.029	PK
3			5740.120	57.992	52.867	-16.008	74.000	5.125	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

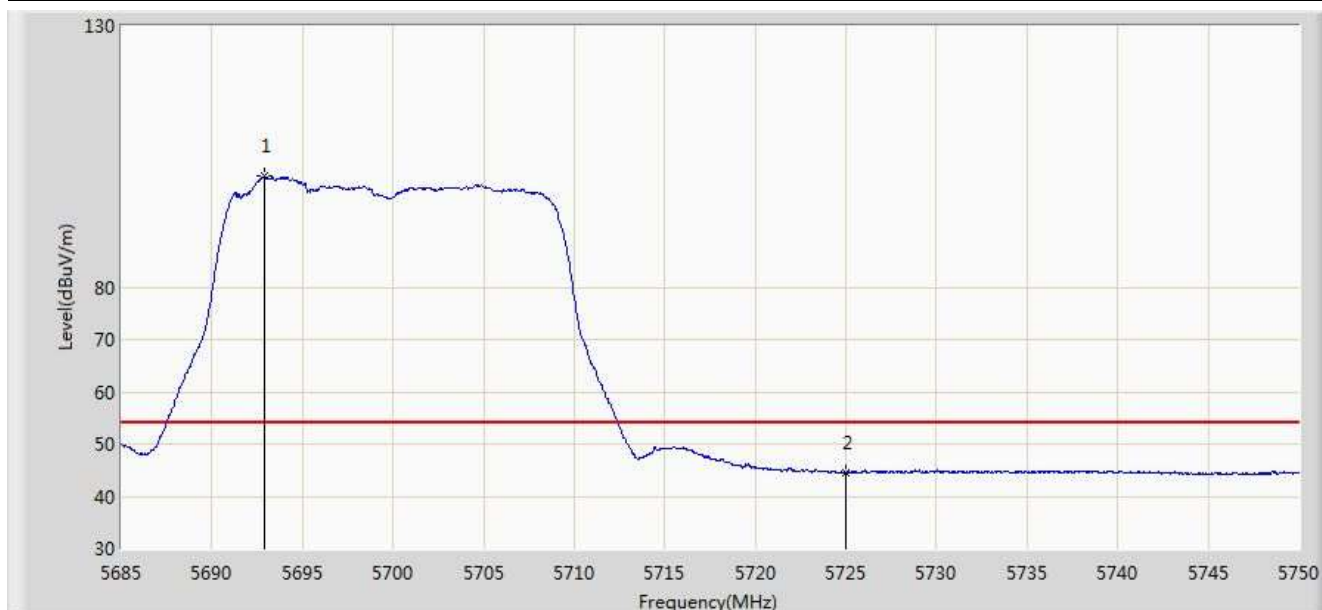


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5692.897	101.186	96.345	N/A	N/A	4.840	AV
2			5725.000	44.526	39.497	-9.474	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

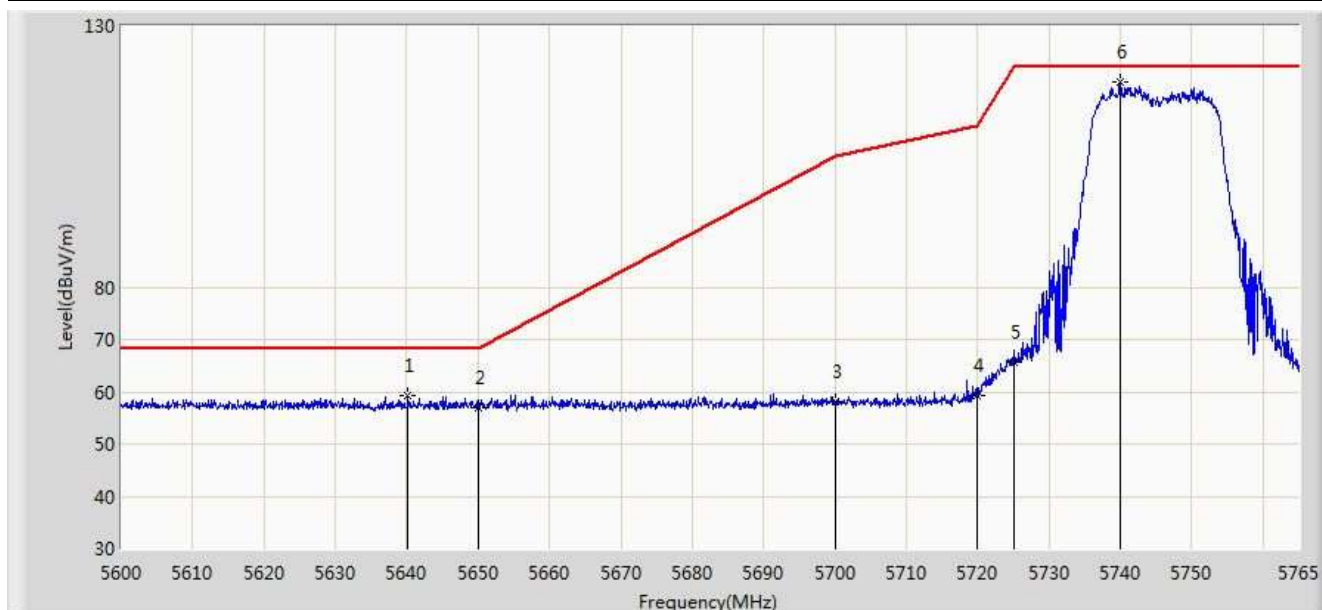


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5640.095	59.131	54.493	-9.069	68.200	4.638	PK
2			5650.000	57.035	52.364	-11.165	68.200	4.671	PK
3			5700.000	58.018	53.140	-47.182	105.200	4.878	PK
4			5720.000	59.283	54.286	-51.517	110.800	4.997	PK
5			5725.000	65.640	60.611	-56.560	122.200	5.029	PK
6		*	5739.920	119.340	114.216	N/A	N/A	5.123	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

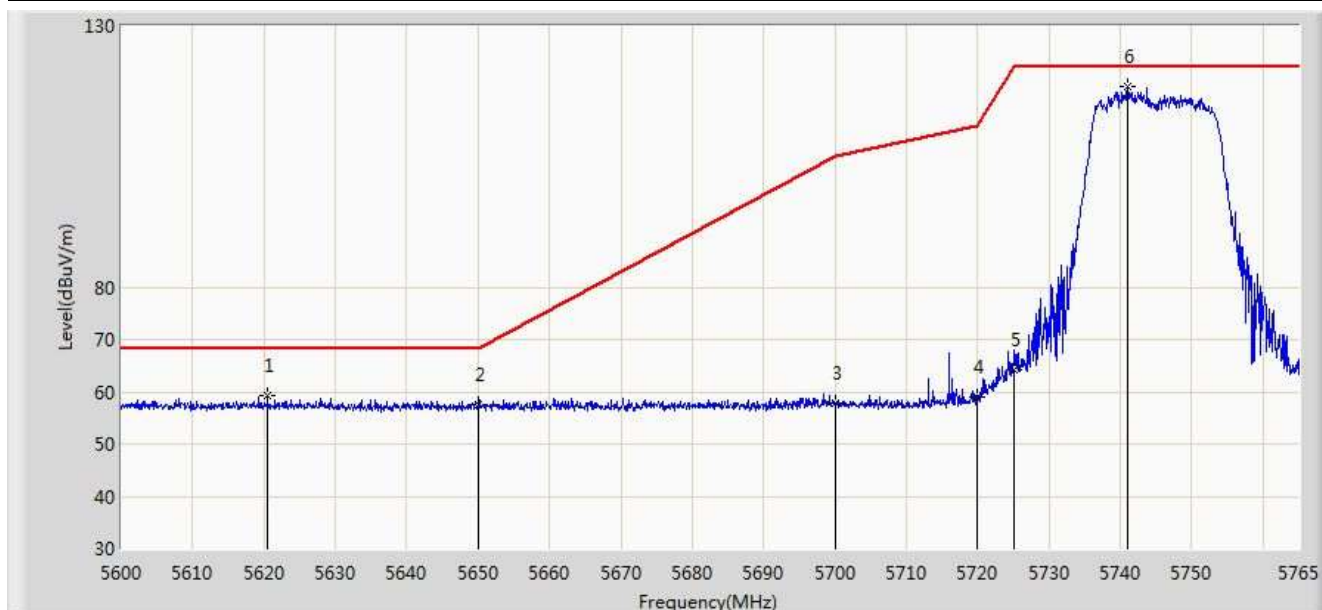


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5620.460	59.234	54.652	-8.966	68.200	4.581	PK
2			5650.000	57.666	52.995	-10.534	68.200	4.671	PK
3			5700.000	57.758	52.880	-47.442	105.200	4.878	PK
4			5720.000	59.077	54.080	-51.723	110.800	4.997	PK
5			5725.000	64.342	59.313	-57.858	122.200	5.029	PK
6		*	5741.075	118.424	113.293	N/A	N/A	5.131	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

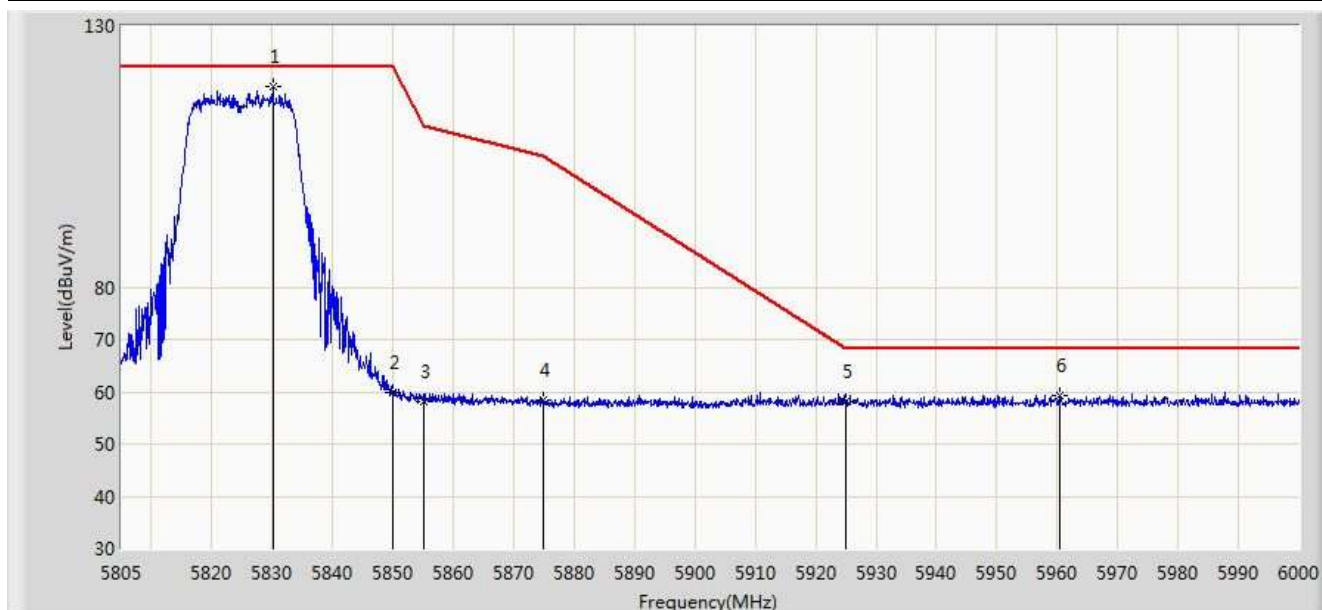


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.058	118.459	112.842	N/A	N/A	5.617	PK
2			5850.000	59.840	54.114	-62.360	122.200	5.726	PK
3			5855.000	58.105	52.359	-52.695	110.800	5.746	PK
4			5875.000	58.466	52.646	-46.734	105.200	5.820	PK
5			5925.000	58.190	52.224	-10.010	68.200	5.967	PK
6			5960.415	59.410	53.365	-8.790	68.200	6.044	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

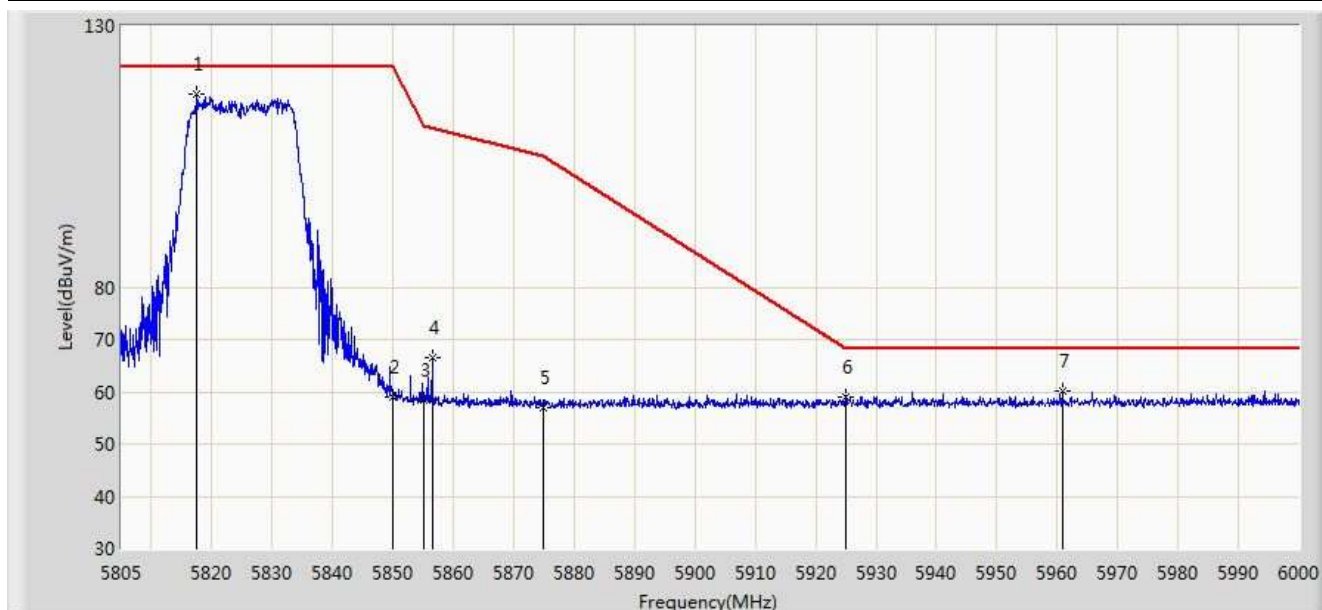


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5817.578	116.956	111.411	N/A	N/A	5.544	PK
2			5850.000	58.904	53.178	-63.296	122.200	5.726	PK
3			5855.000	58.469	52.723	-52.331	110.800	5.746	PK
4			5856.480	66.532	60.780	-43.853	110.385	5.752	PK
5			5875.000	56.929	51.109	-48.271	105.200	5.820	PK
6			5925.000	59.098	53.132	-9.102	68.200	5.967	PK
7			5960.805	60.172	54.127	-8.028	68.200	6.045	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

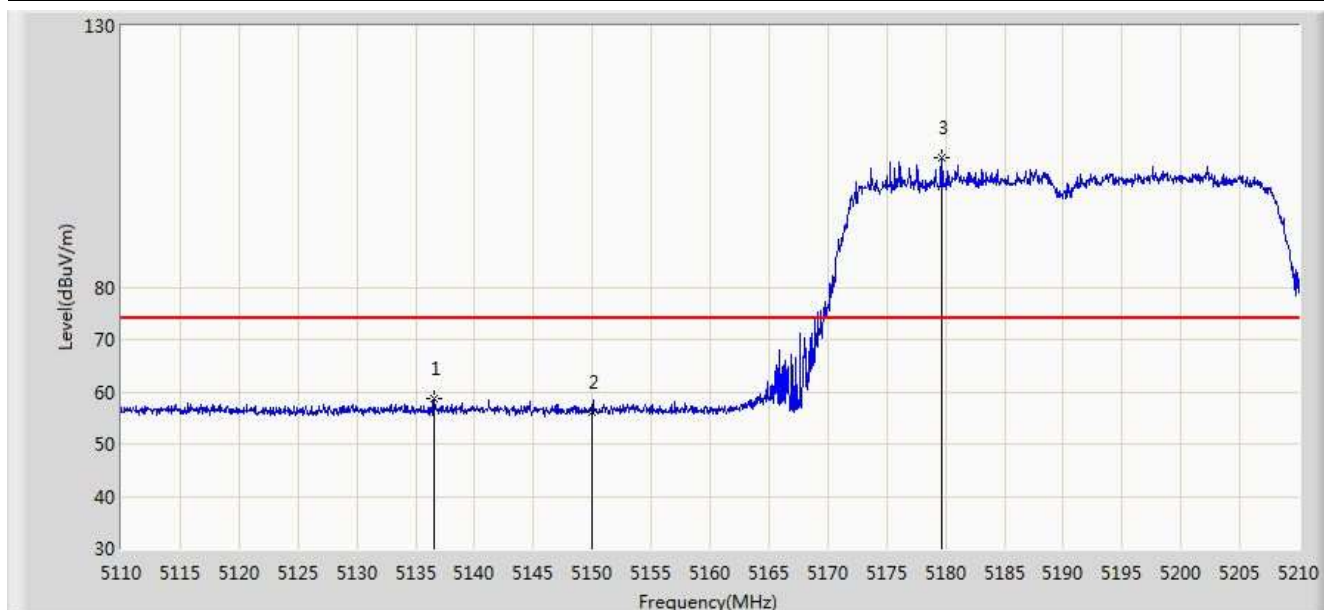


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.600	58.805	54.630	-15.195	74.000	4.175	PK
2			5150.000	56.197	52.028	-17.803	74.000	4.170	PK
3		*	5179.650	104.896	100.826	N/A	N/A	4.070	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

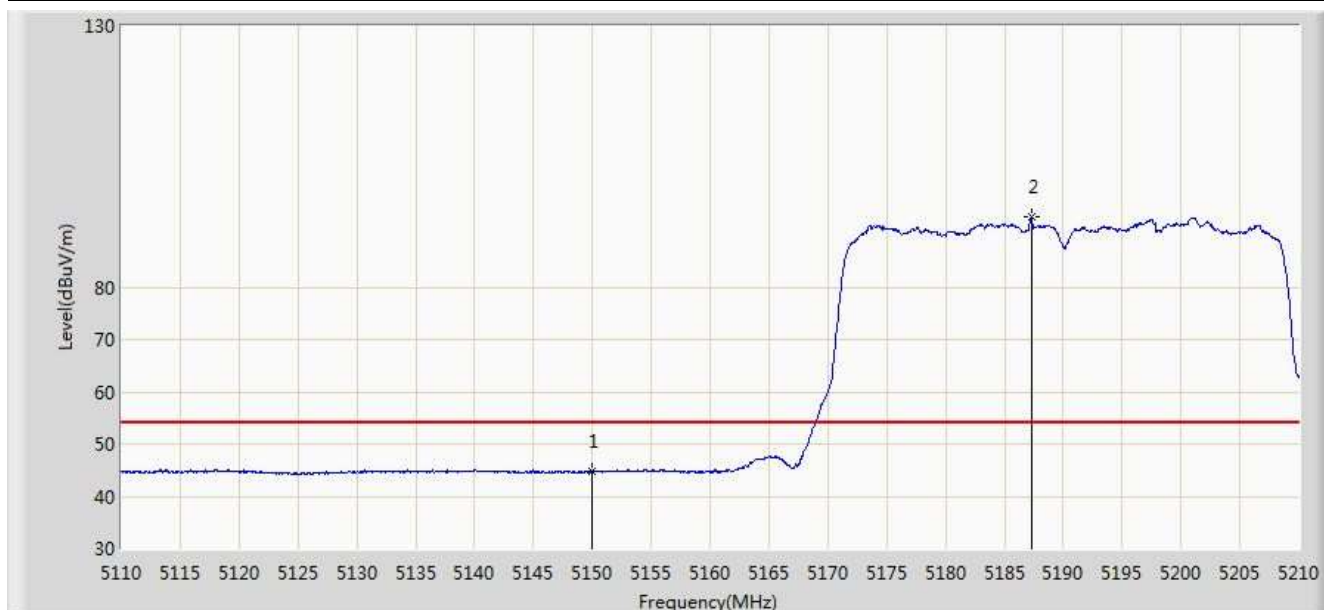


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.659	40.490	-9.341	54.000	4.170	AV
2		*	5187.300	93.367	89.324	N/A	N/A	4.043	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

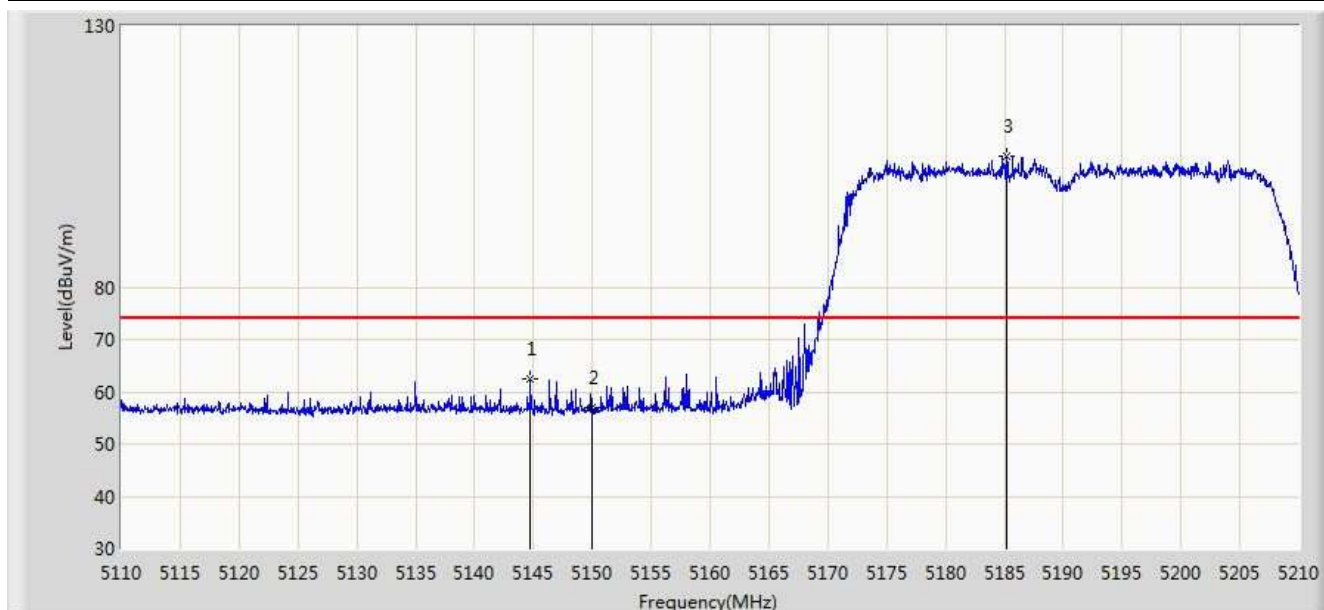


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.750	62.584	58.408	-11.416	74.000	4.175	PK
2			5150.000	57.031	52.862	-16.969	74.000	4.170	PK
3		*	5185.250	105.093	101.043	N/A	N/A	4.050	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

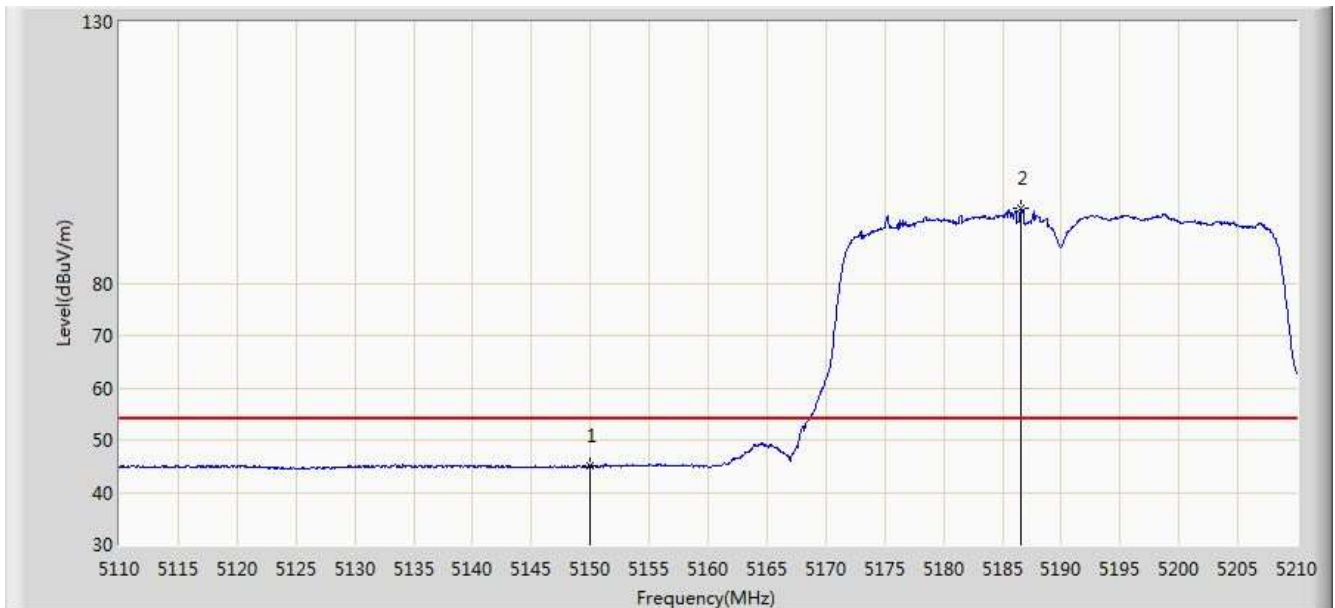


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.022	40.853	-8.978	54.000	4.170	AV
2		*	5186.600	94.465	90.420	N/A	N/A	4.045	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

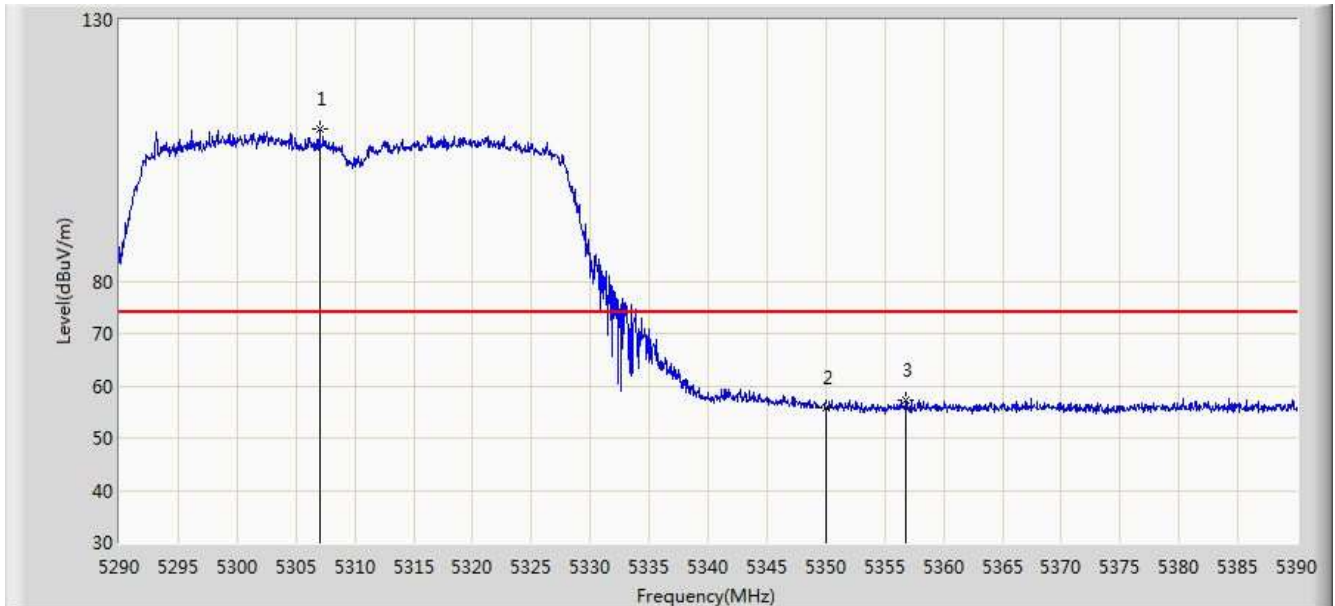


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.050	109.226	105.401	N/A	N/A	3.825	PK
2			5350.000	55.857	51.952	-18.143	74.000	3.904	PK
3			5356.800	57.296	53.379	-16.704	74.000	3.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

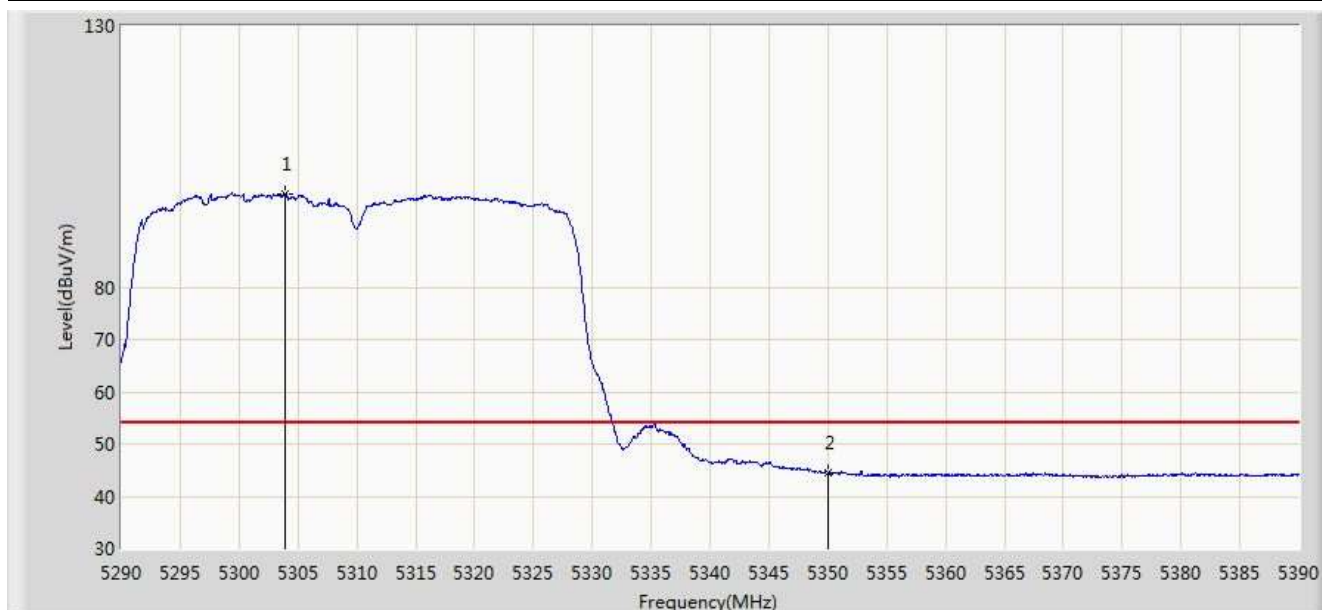


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.950	97.955	94.136	N/A	N/A	3.819	AV
2			5350.000	44.561	40.656	-9.439	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

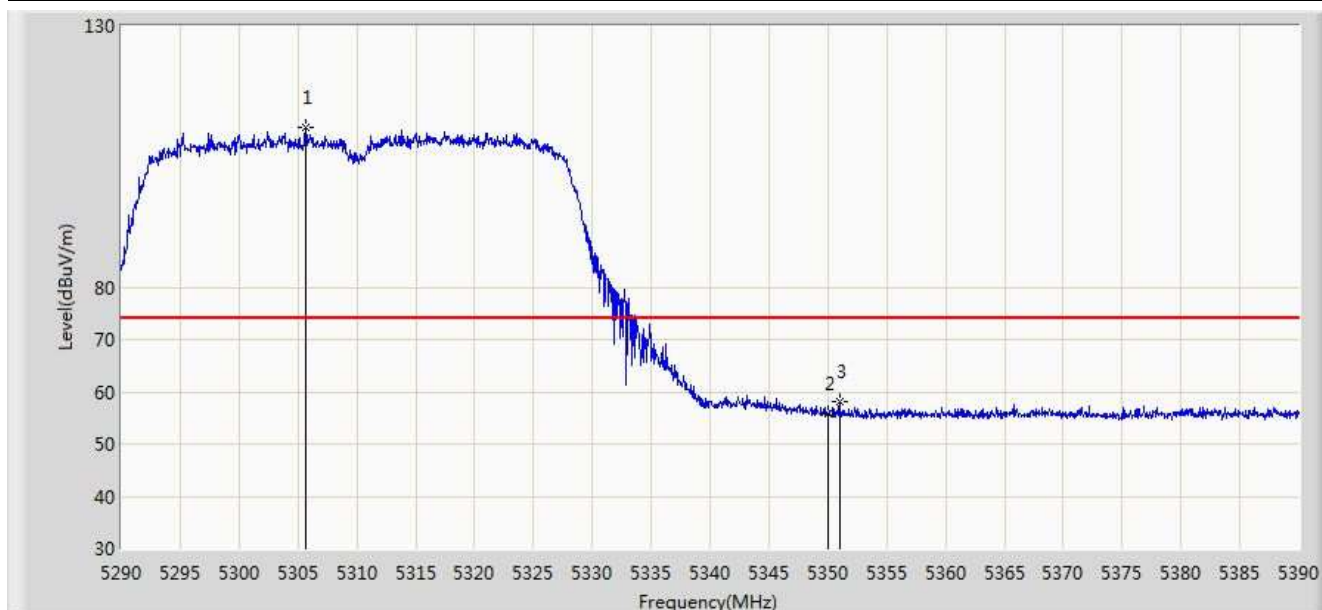


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.650	110.715	106.893	N/A	N/A	3.821	PK
2			5350.000	55.687	51.782	-18.313	74.000	3.904	PK
3			5351.000	58.159	54.252	-15.841	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

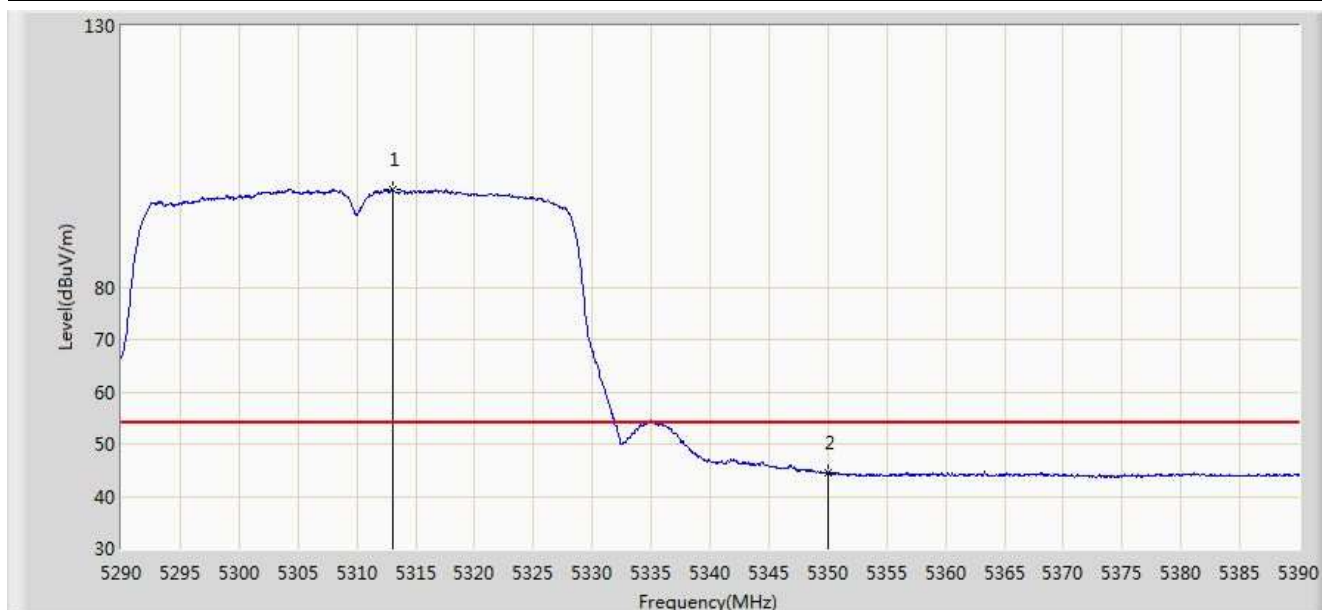


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.000	98.726	94.891	N/A	N/A	3.836	AV
2			5350.000	44.481	40.576	-9.519	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 18:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

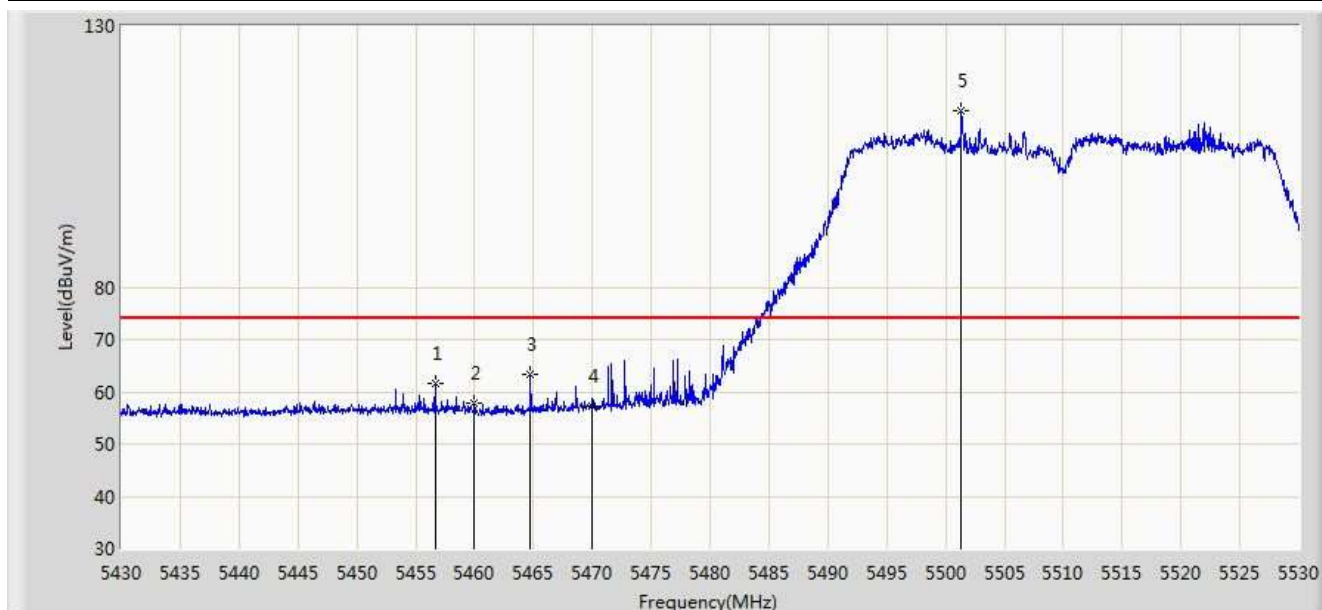


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.650	61.569	57.396	-12.431	74.000	4.173	PK
2			5460.000	57.822	53.642	-16.178	74.000	4.180	PK
3			5464.750	63.350	59.159	-10.650	74.000	4.191	PK
4			5470.000	57.359	53.157	-16.641	74.000	4.202	PK
5		*	5501.300	113.709	109.433	N/A	N/A	4.275	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 10:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

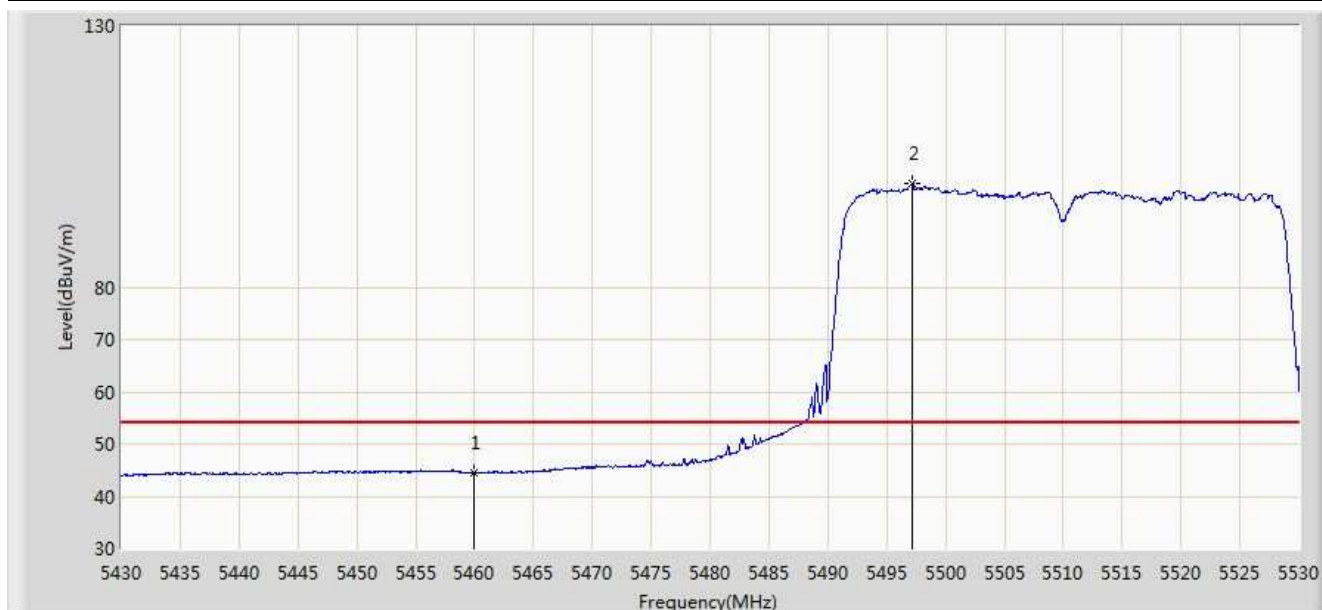


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.592	40.412	-9.408	54.000	4.180	AV
2		*	5497.200	99.723	95.459	N/A	N/A	4.264	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 10:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

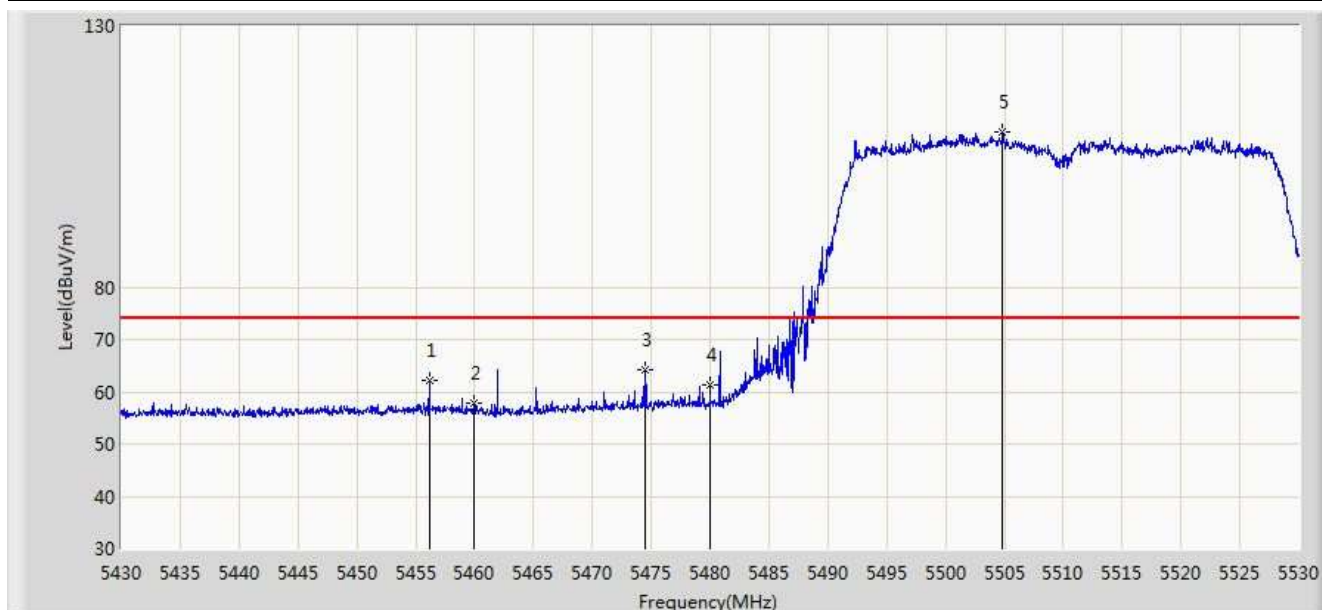


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.150	62.100	57.928	-11.900	74.000	4.172	PK
2			5460.000	57.697	53.517	-16.303	74.000	4.180	PK
3			5474.500	64.241	60.028	-9.759	74.000	4.212	PK
4			5480.000	61.416	57.191	-12.584	74.000	4.225	PK
5		*	5504.850	109.761	105.475	N/A	N/A	4.286	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 10:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

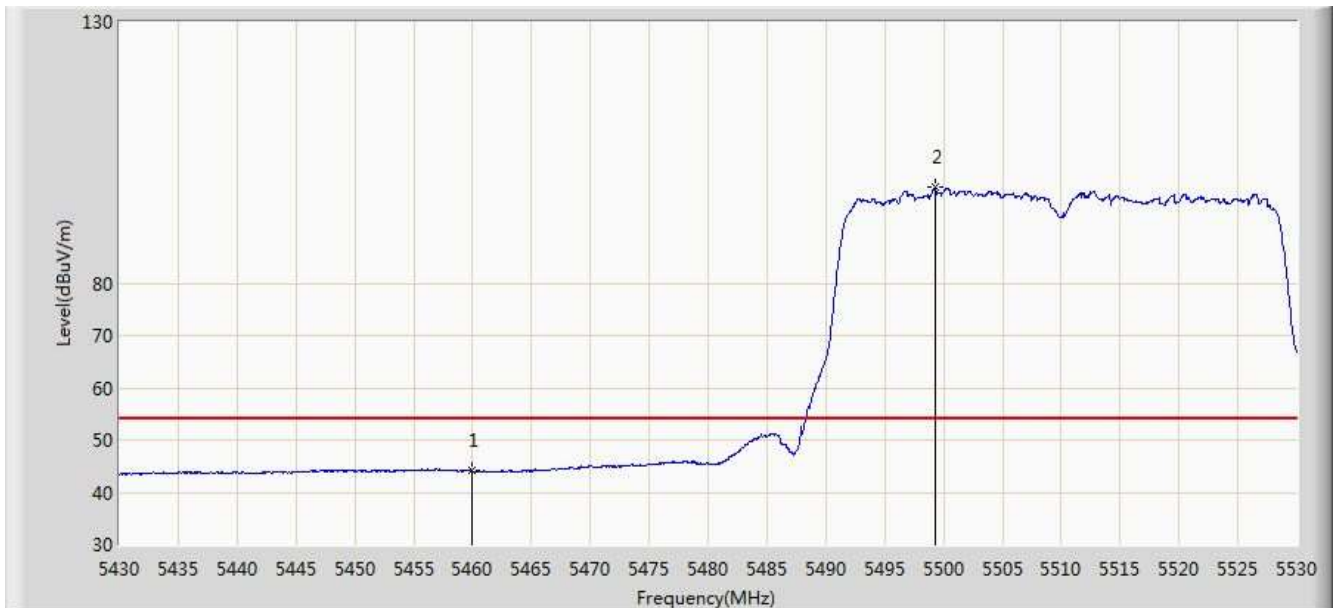


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.081	39.901	-9.919	54.000	4.180	AV
2		*	5499.300	98.277	94.007	N/A	N/A	4.270	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 10:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

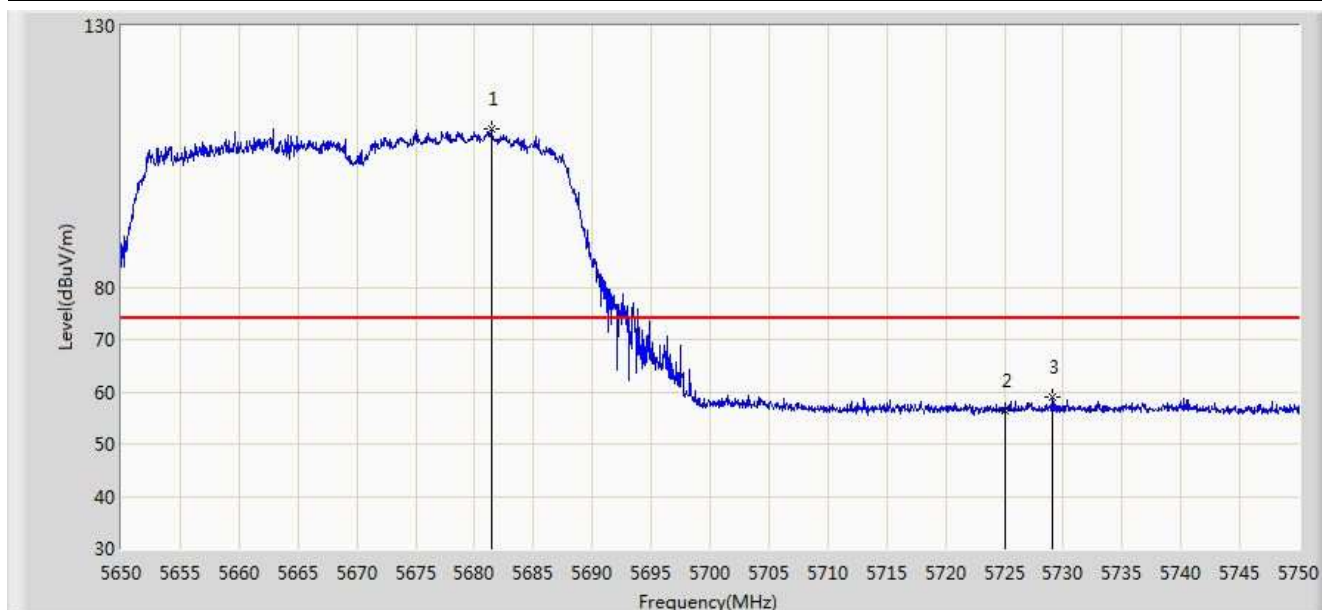


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5681.450	110.429	105.636	N/A	N/A	4.793	PK
2			5725.000	56.466	51.437	-17.534	74.000	5.029	PK
3			5729.050	59.065	54.010	-14.935	74.000	5.054	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 11:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

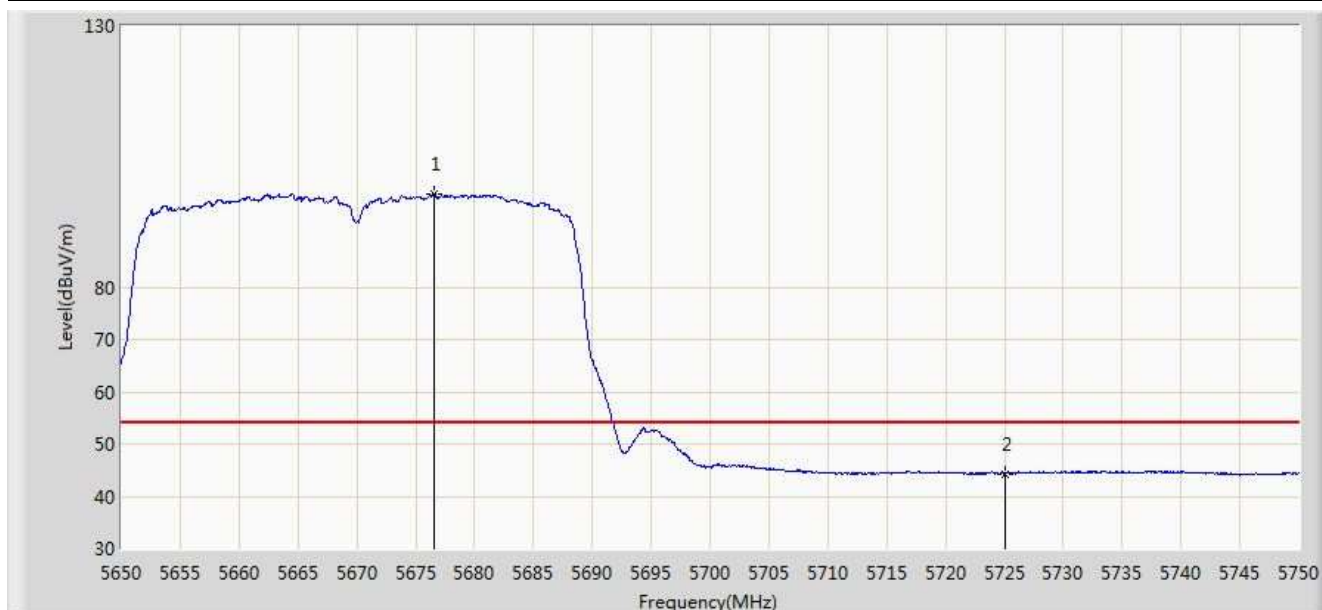


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.550	97.892	93.119	N/A	N/A	4.772	AV
2			5725.000	44.289	39.260	-9.711	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 11:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

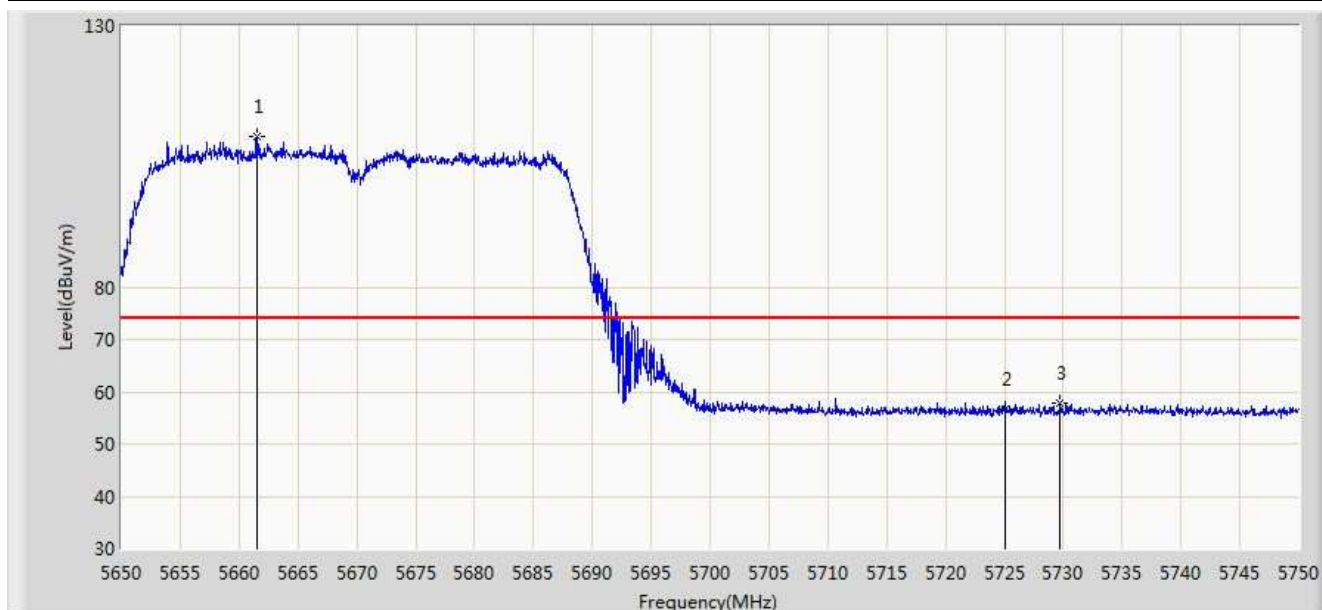

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.500	108.813	104.100	N/A	N/A	4.713	PK
2			5725.000	56.760	51.731	-17.240	74.000	5.029	PK
3			5729.750	57.800	52.741	-16.200	74.000	5.059	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.300	96.027	91.307	N/A	N/A	4.719	AV
2			5725.000	43.984	38.955	-10.016	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

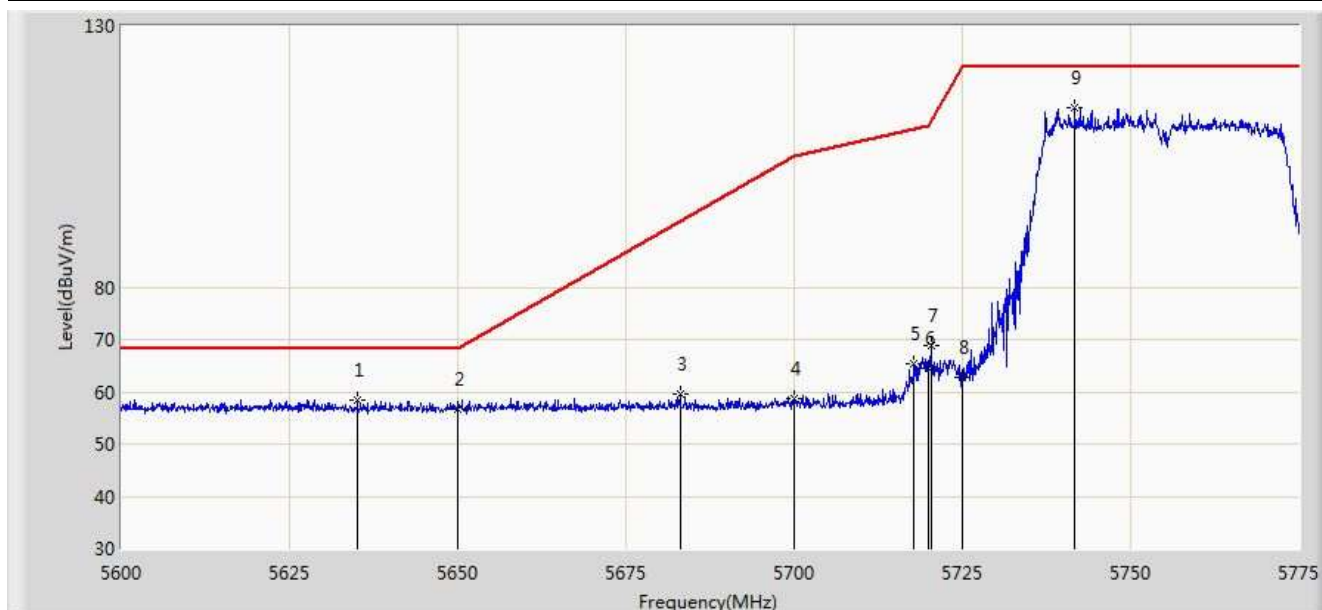


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.087	58.290	53.666	-9.910	68.200	4.624	PK
2			5650.000	56.549	51.878	-11.651	68.200	4.671	PK
3			5683.125	59.463	54.663	-33.286	92.749	4.800	PK
4			5700.000	58.571	53.693	-46.629	105.200	4.878	PK
5			5717.862	65.344	60.361	-44.858	110.202	4.983	PK
6			5720.000	64.530	59.533	-46.270	110.800	4.997	PK
7			5720.312	68.772	63.773	-42.740	111.512	4.999	PK
8			5725.000	62.879	57.850	-59.321	122.200	5.029	PK
9		*	5741.750	114.465	109.329	N/A	N/A	5.136	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 11:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

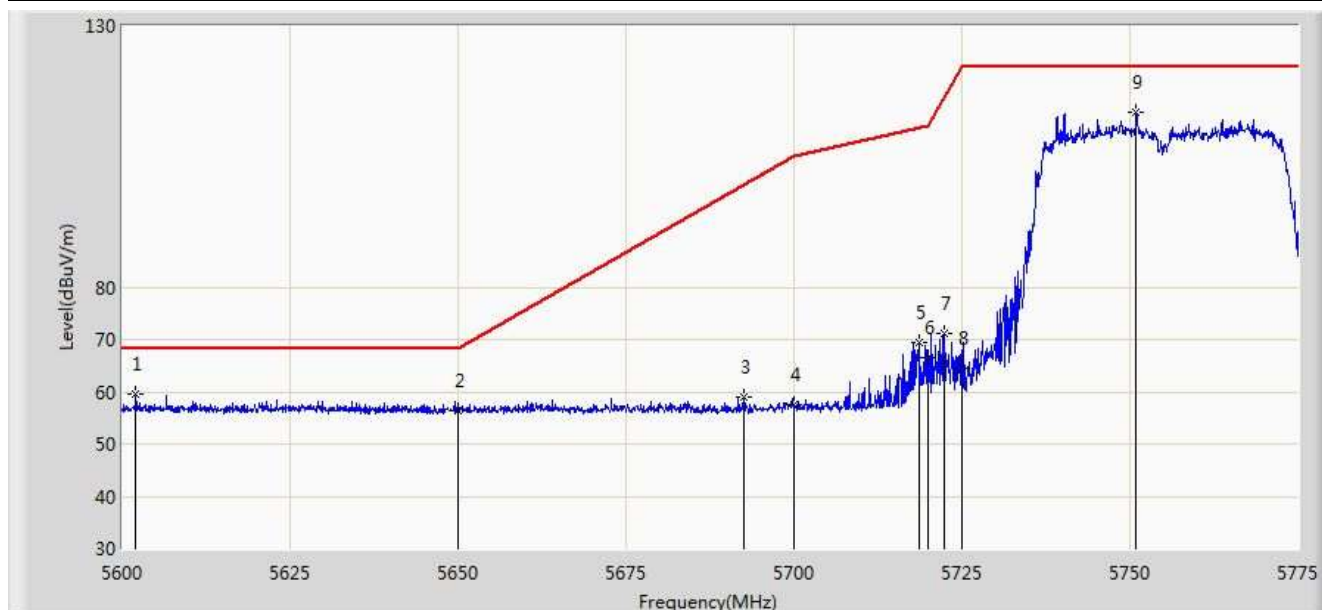


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5602.013	59.473	54.941	-8.727	68.200	4.532	PK
2			5650.000	56.504	51.833	-11.696	68.200	4.671	PK
3			5692.487	58.866	54.028	-40.795	99.661	4.838	PK
4			5700.000	57.549	52.671	-47.651	105.200	4.878	PK
5			5718.650	69.321	64.333	-41.101	110.423	4.989	PK
6			5720.000	66.654	61.657	-44.146	110.800	4.997	PK
7			5722.413	71.182	66.170	-45.121	116.303	5.012	PK
8			5725.000	64.598	59.569	-57.602	122.200	5.029	PK
9		*	5750.937	113.498	108.309	N/A	N/A	5.188	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 11:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

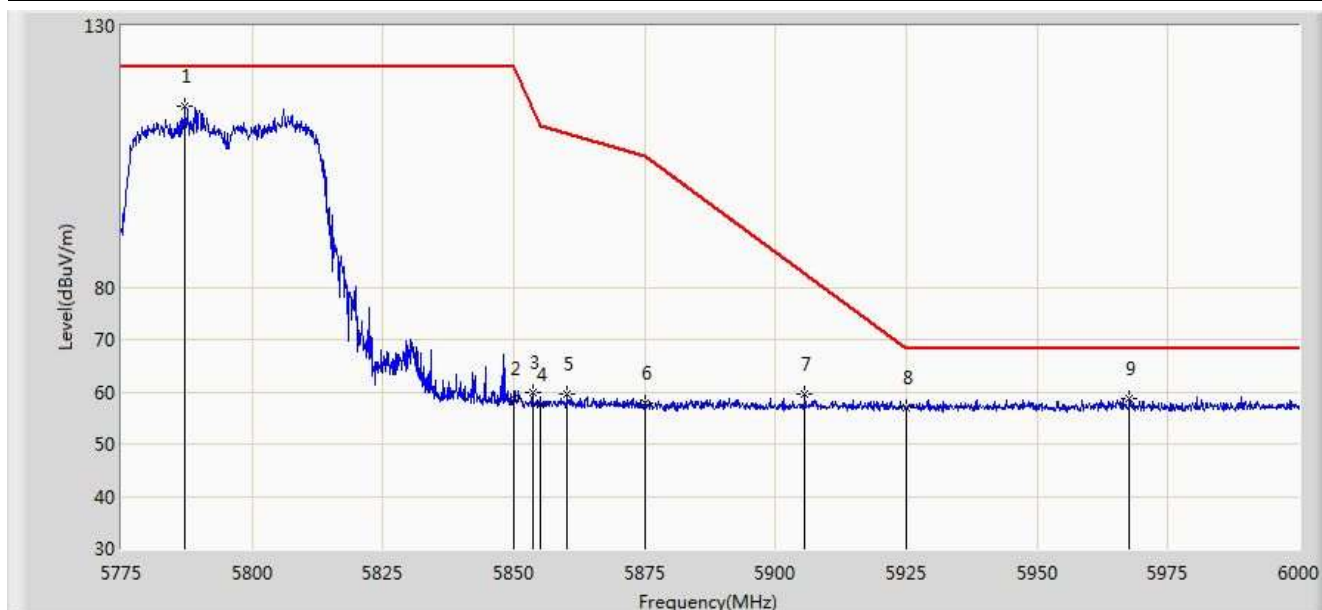


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.263	114.521	109.143	N/A	N/A	5.378	PK
2			5850.000	58.606	52.880	-63.594	122.200	5.726	PK
3			5853.525	59.983	54.243	-54.179	114.162	5.741	PK
4			5855.000	57.640	51.894	-53.160	110.800	5.746	PK
5			5860.275	59.584	53.816	-49.737	109.321	5.768	PK
6			5875.000	57.872	52.052	-47.328	105.200	5.820	PK
7			5905.612	59.648	53.730	-22.862	82.510	5.918	PK
8			5925.000	56.923	50.957	-11.277	68.200	5.967	PK
9			5967.712	58.790	52.733	-9.410	68.200	6.057	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 11:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

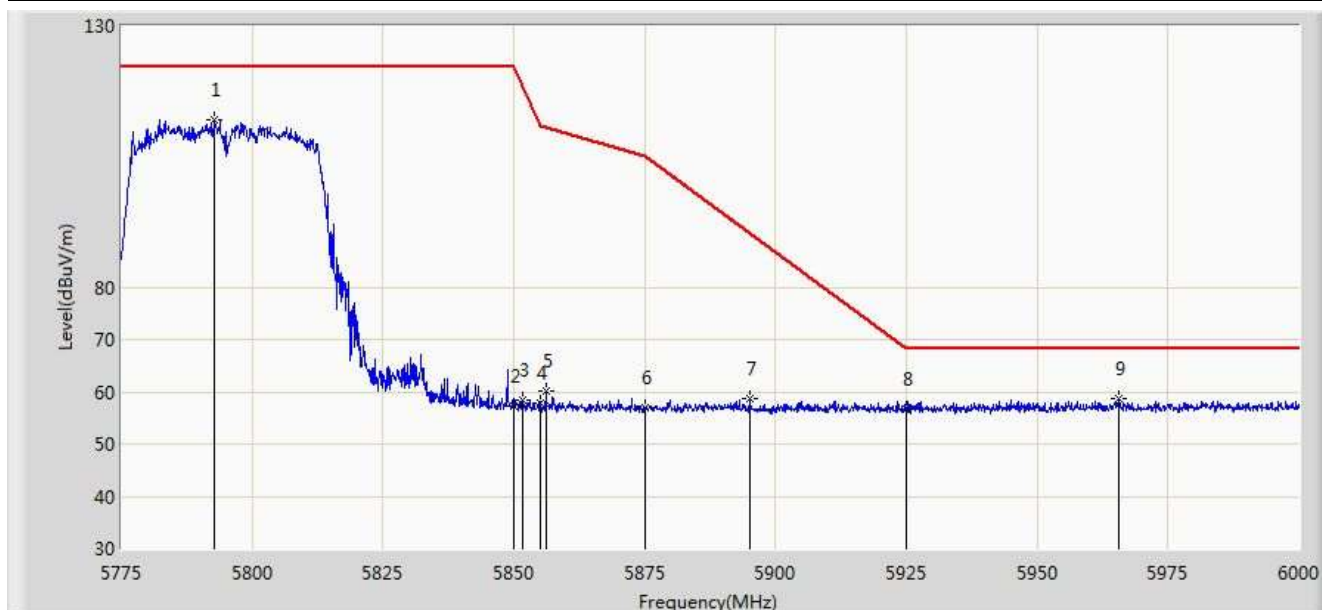


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5792.775	112.099	106.693	N/A	N/A	5.406	PK
2			5850.000	57.238	51.512	-64.962	122.200	5.726	PK
3			5851.725	58.521	52.788	-59.745	118.266	5.732	PK
4			5855.000	57.967	52.221	-52.833	110.800	5.746	PK
5			5856.112	60.058	54.307	-50.430	110.488	5.751	PK
6			5875.000	56.956	51.136	-48.244	105.200	5.820	PK
7			5895.038	58.587	52.698	-31.748	90.334	5.889	PK
8			5925.000	56.692	50.726	-11.508	68.200	5.967	PK
9		*	5965.462	58.762	52.709	-9.438	68.200	6.053	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

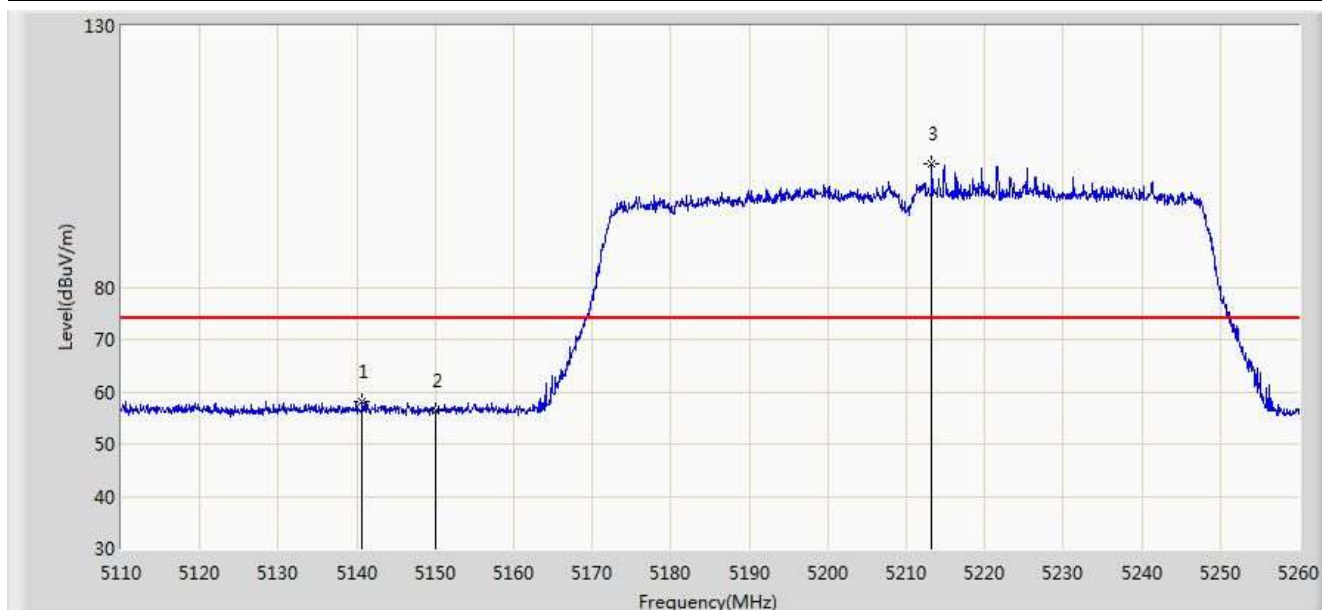


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.675	58.215	54.040	-15.785	74.000	4.176	PK
2			5150.000	56.286	52.117	-17.714	74.000	4.170	PK
3		*	5213.275	103.637	99.678	N/A	N/A	3.958	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

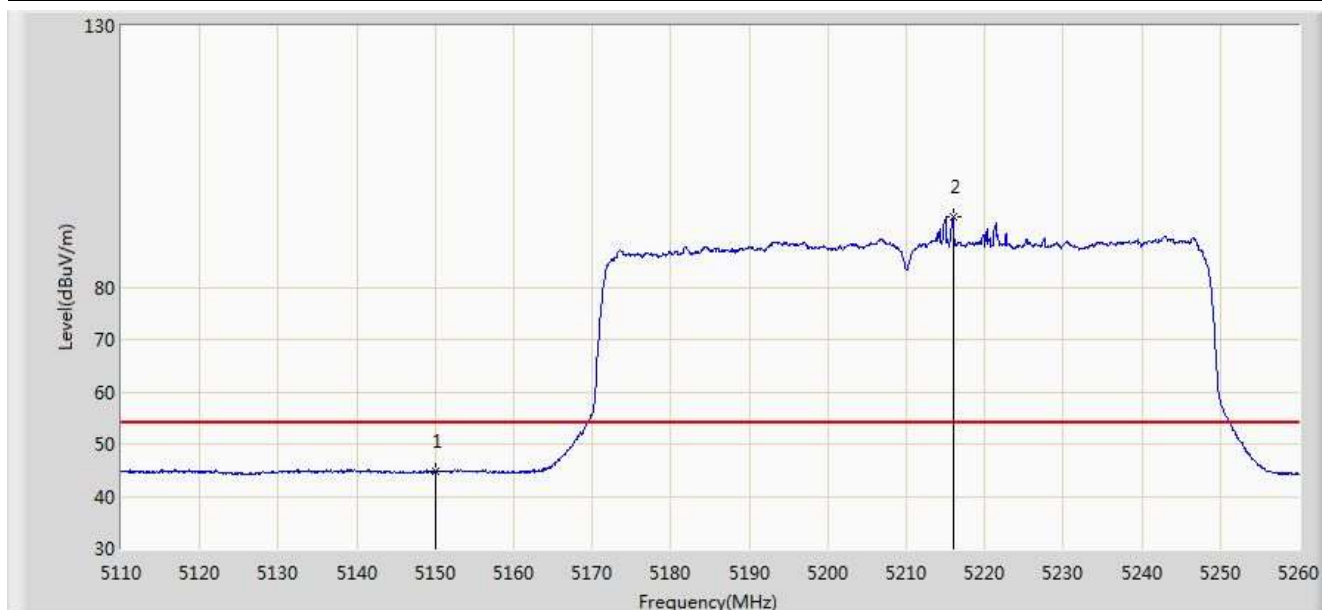


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.703	40.534	-9.297	54.000	4.170	AV
2		*	5215.975	93.468	89.517	N/A	N/A	3.951	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

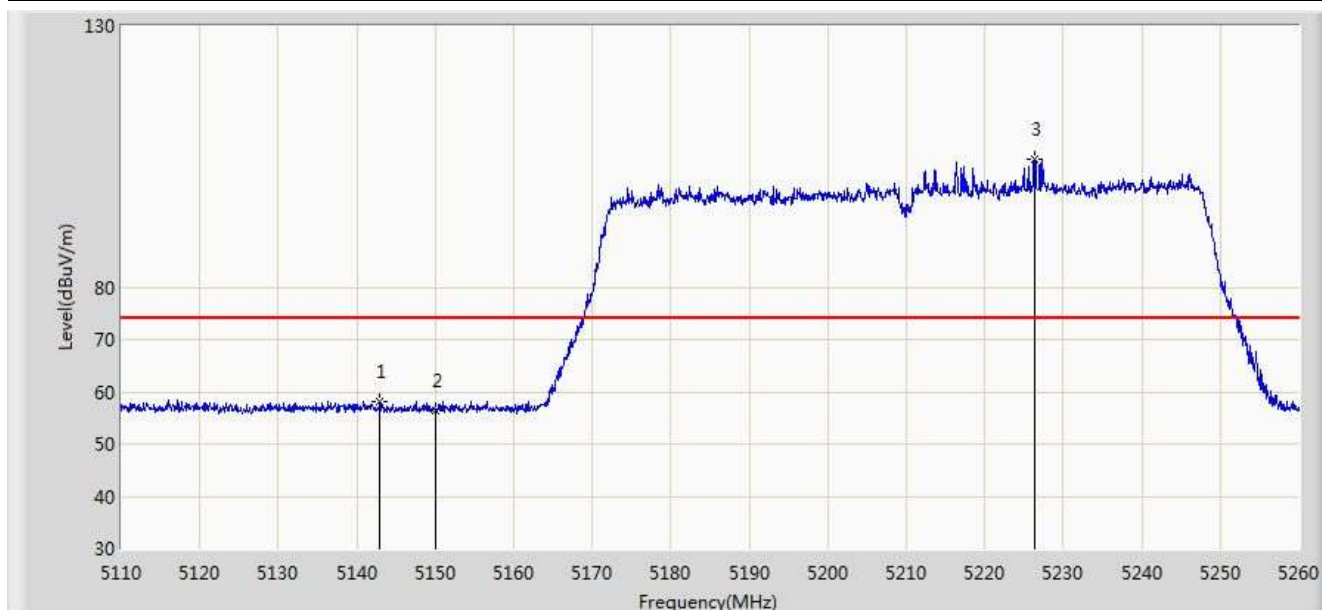

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.925	58.115	53.939	-15.885	74.000	4.176	PK
2			5150.000	56.426	52.257	-17.574	74.000	4.170	PK
3		*	5226.325	104.574	100.654	N/A	N/A	3.920	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.218	41.049	-8.782	54.000	4.170	AV
2		*	5227.900	92.682	88.766	N/A	N/A	3.916	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

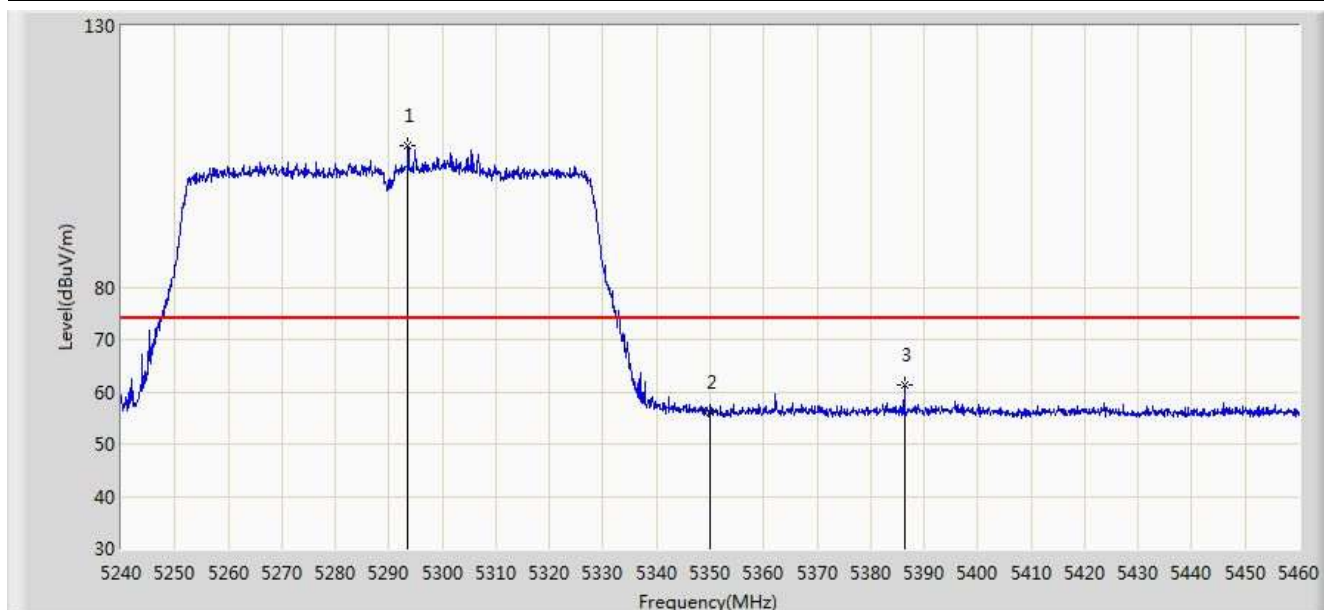


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5293.570	107.164	103.346	N/A	N/A	3.817	PK
2			5350.000	56.011	52.106	-17.989	74.000	3.904	PK
3			5386.300	61.315	57.344	-12.685	74.000	3.972	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

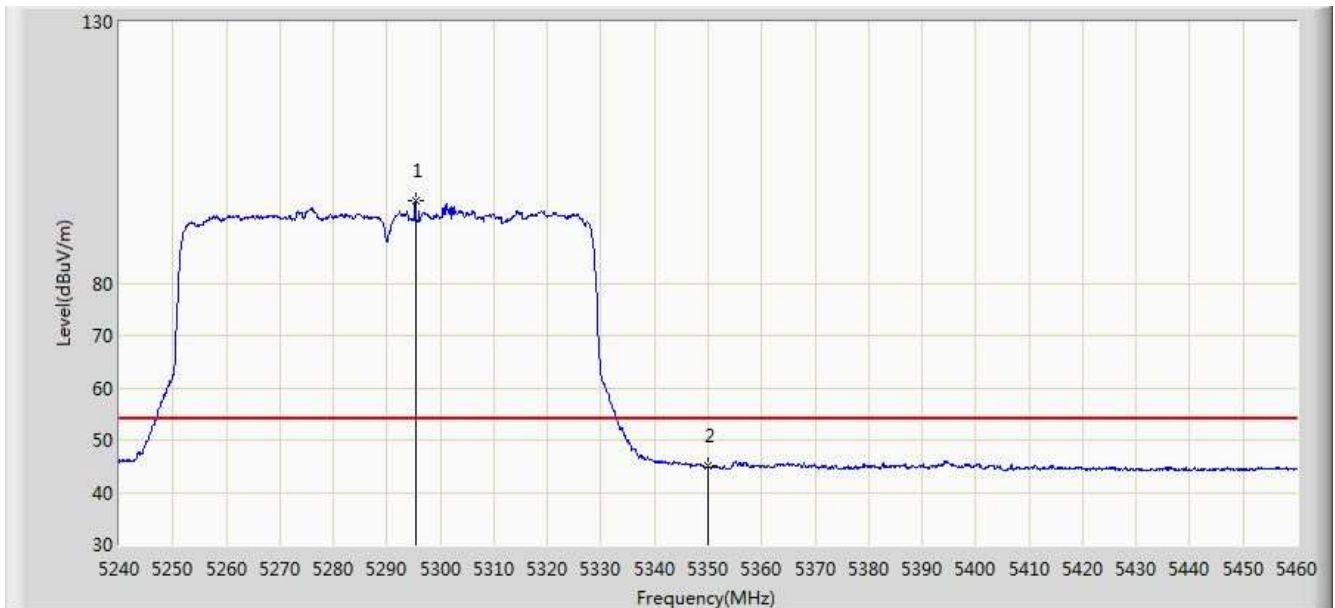


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.330	95.733	91.917	N/A	N/A	3.817	AV
2			5350.000	45.132	41.227	-8.868	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

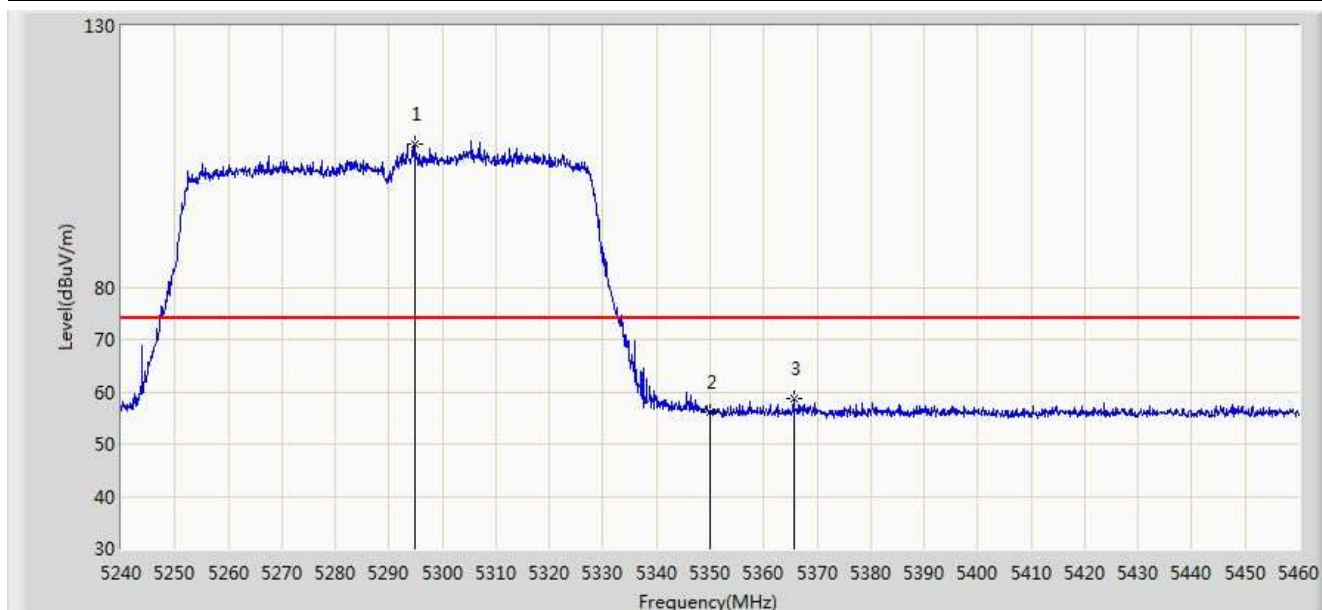


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.780	107.324	103.507	N/A	N/A	3.816	PK
2			5350.000	56.123	52.218	-17.877	74.000	3.904	PK
3			5365.620	58.814	54.881	-15.186	74.000	3.933	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

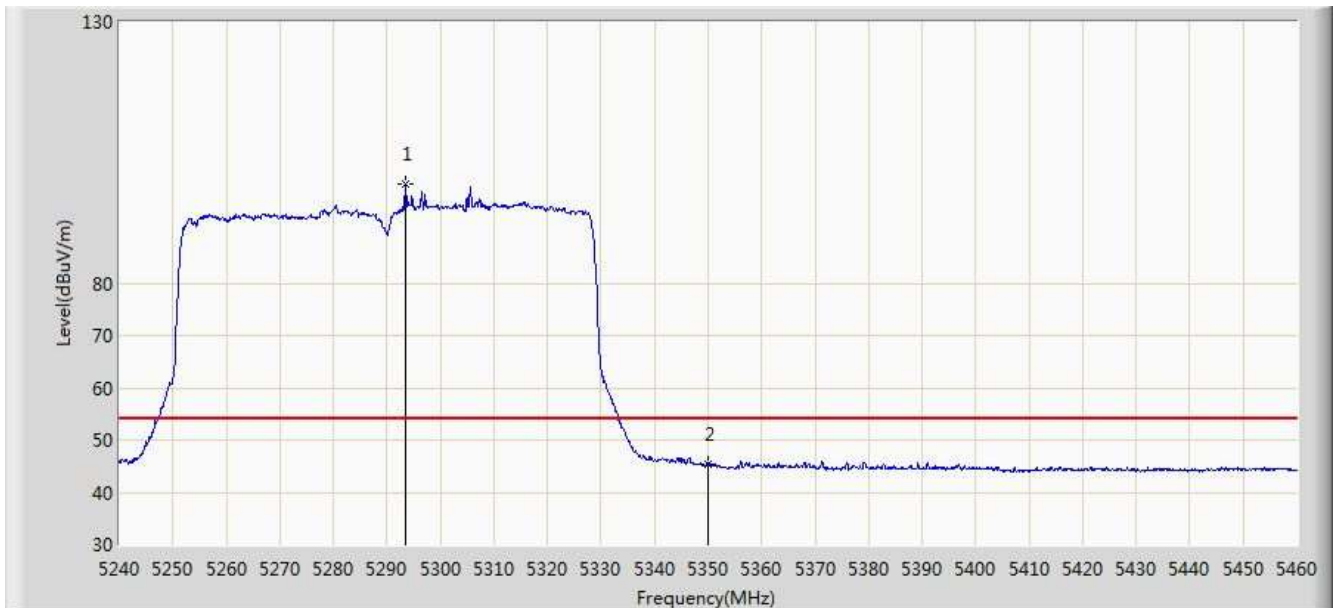


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5293.570	99.027	95.209	N/A	N/A	3.817	AV
2			5350.000	45.370	41.465	-8.630	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

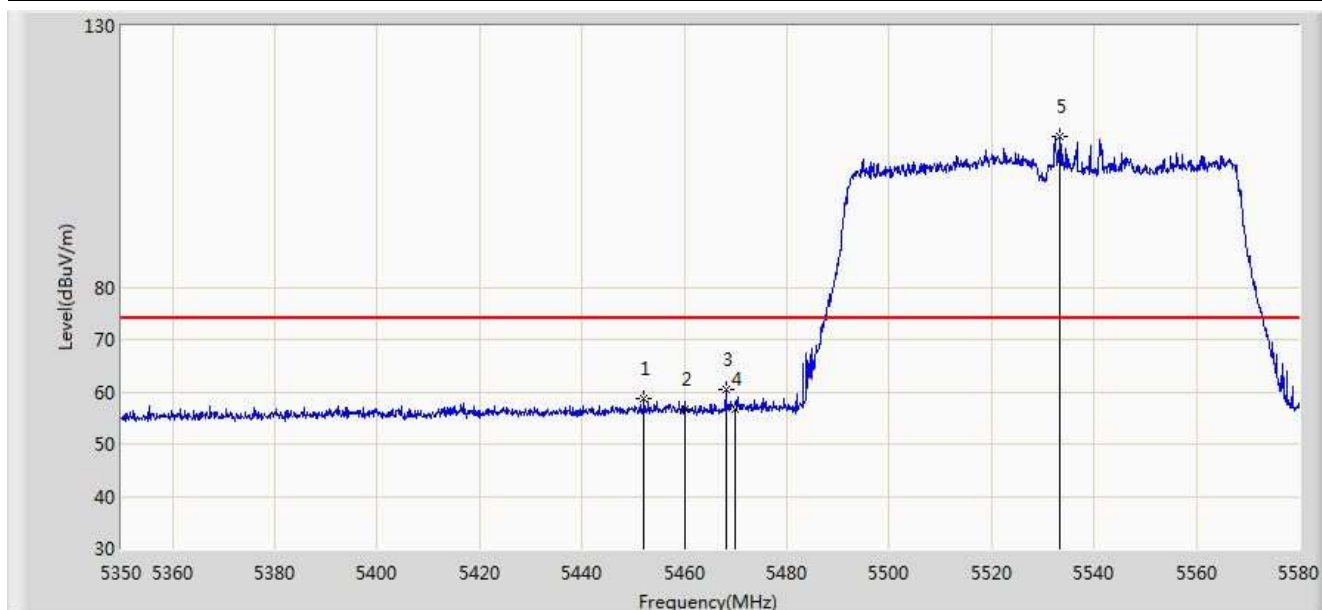


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.120	58.610	54.448	-15.390	74.000	4.161	PK
2			5460.000	56.770	52.590	-17.230	74.000	4.180	PK
3			5468.105	60.491	56.293	-13.509	74.000	4.198	PK
4			5470.000	56.625	52.423	-17.375	74.000	4.202	PK
5		*	5533.310	108.869	104.498	N/A	N/A	4.371	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

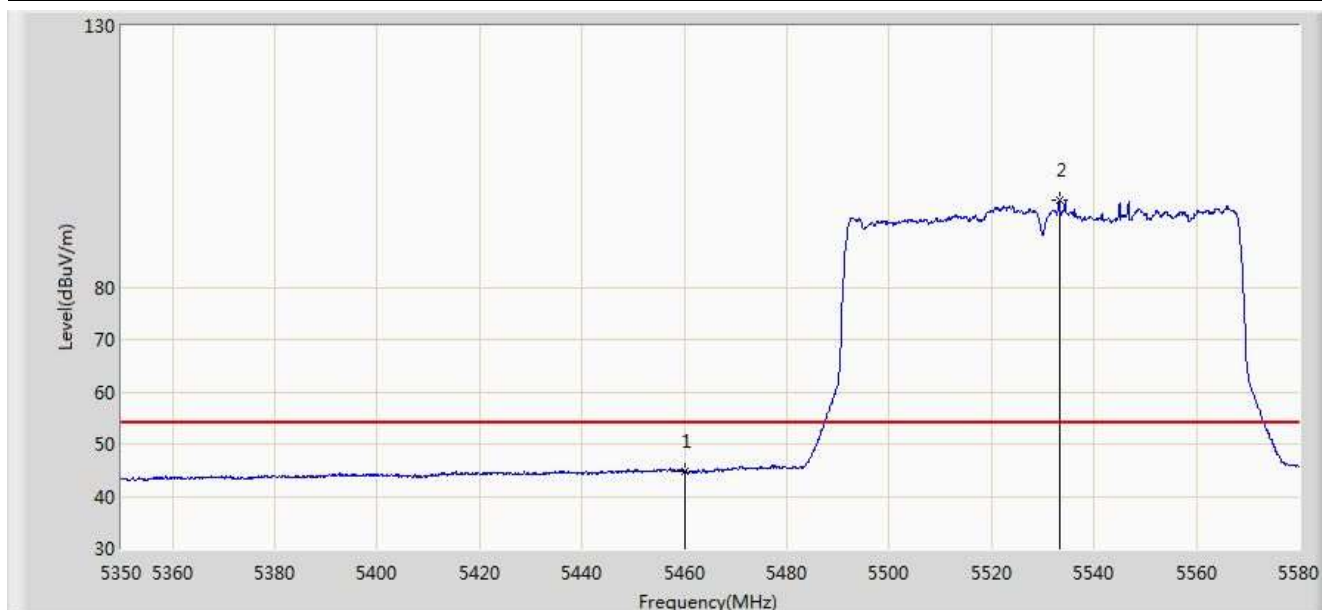


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.897	40.717	-9.103	54.000	4.180	AV
2		*	5533.195	96.629	92.258	N/A	N/A	4.371	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

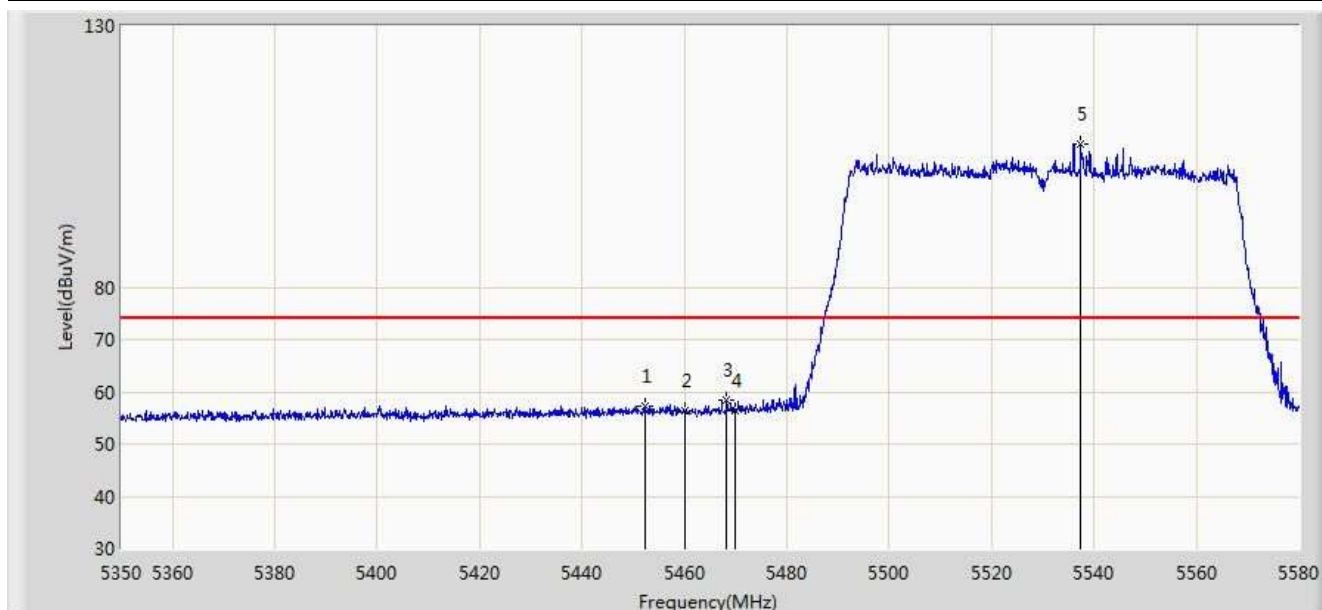


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.235	57.359	53.197	-16.641	74.000	4.162	PK
2			5460.000	56.252	52.072	-17.748	74.000	4.180	PK
3			5468.220	58.490	54.292	-15.510	74.000	4.198	PK
4			5470.000	56.247	52.045	-17.753	74.000	4.202	PK
5		*	5537.450	107.485	103.101	N/A	N/A	4.384	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

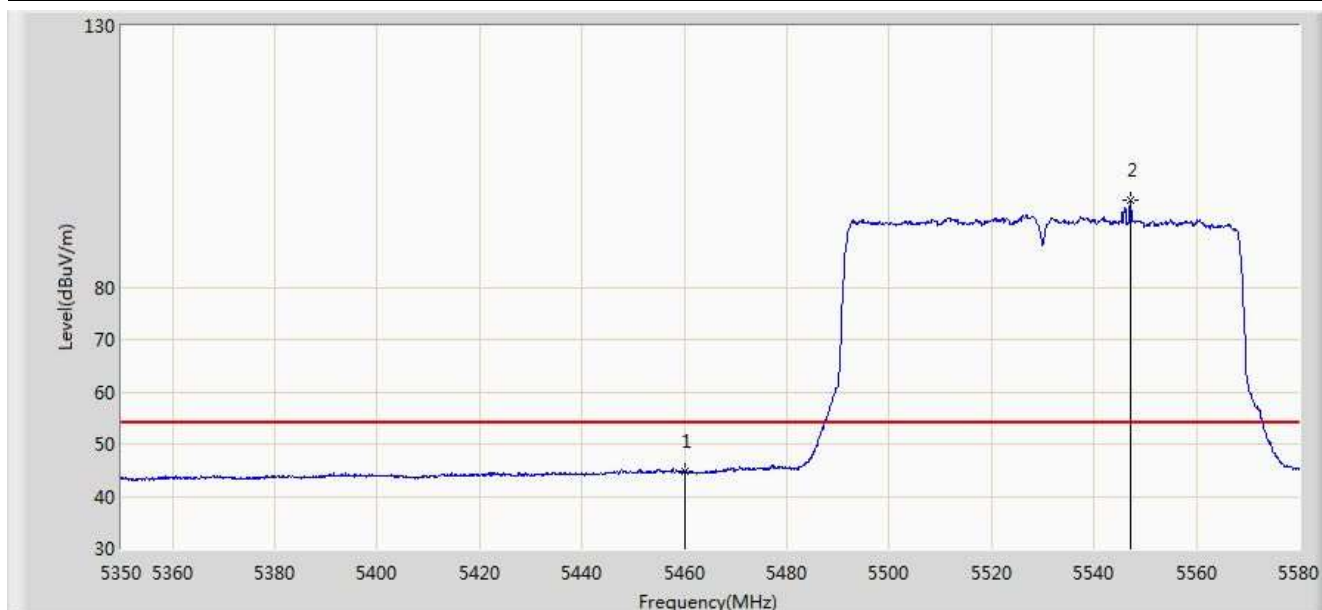


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.703	40.523	-9.297	54.000	4.180	AV
2		*	5547.225	96.615	92.205	N/A	N/A	4.411	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

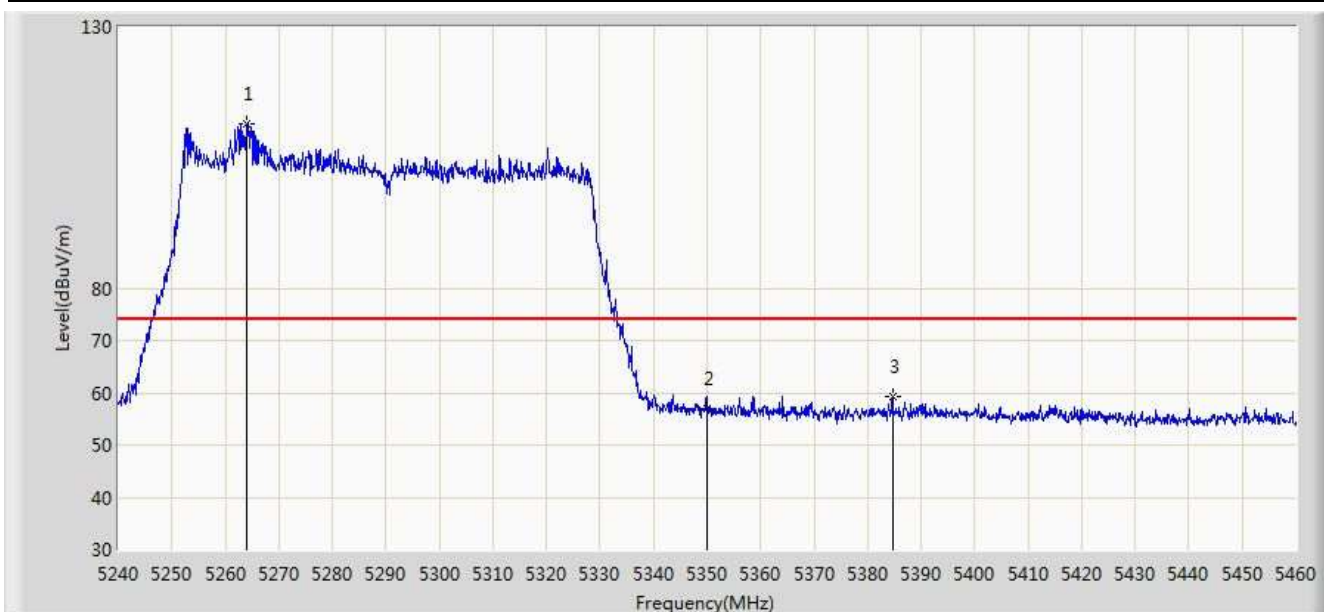


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5263.980	111.547	107.707	N/A	N/A	3.840	PK
2			5350.000	56.953	53.048	-17.047	74.000	3.904	PK
3			5384.650	59.364	55.396	-14.636	74.000	3.968	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

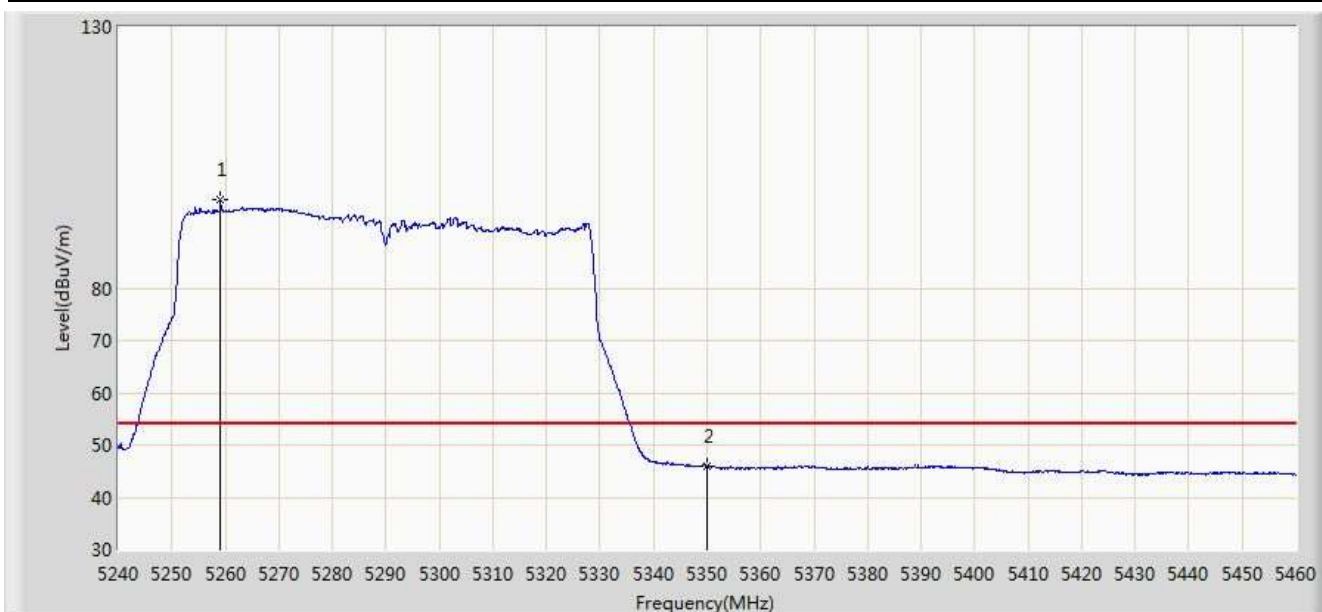


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5259.140	97.069	93.226	N/A	N/A	3.843	AV
2			5350.000	45.828	41.923	-8.172	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

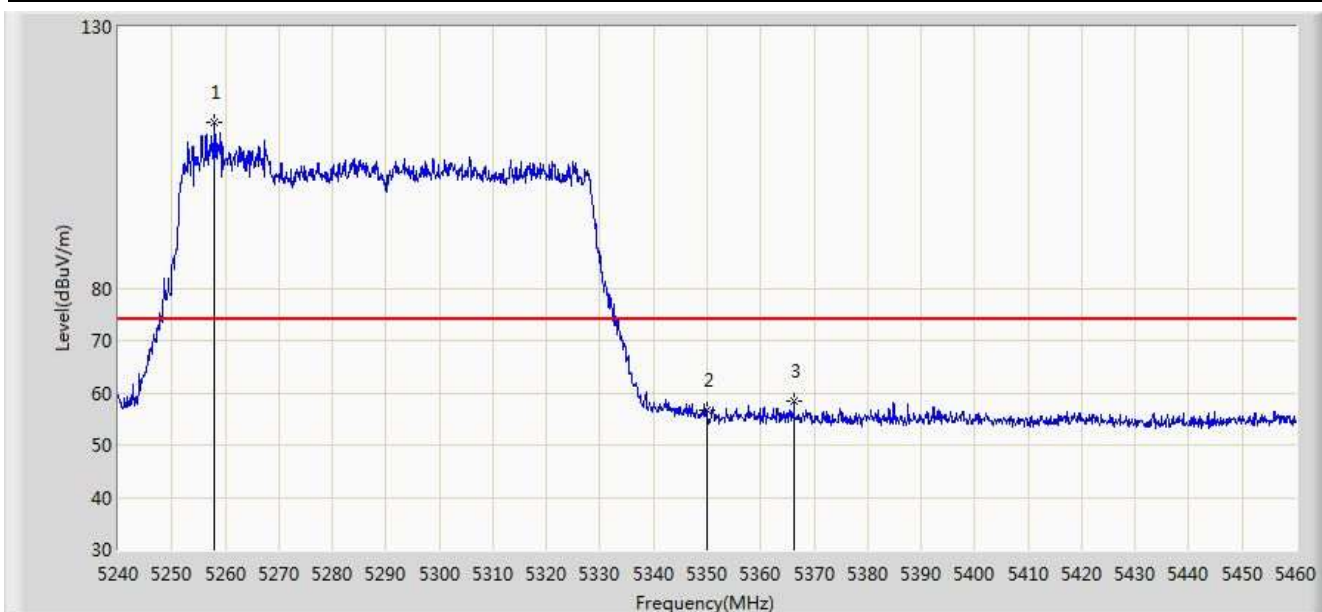


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5257.930	111.658	107.814	N/A	N/A	3.845	PK
2			5350.000	56.658	52.753	-17.342	74.000	3.904	PK
3			5366.280	58.367	54.433	-15.633	74.000	3.934	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

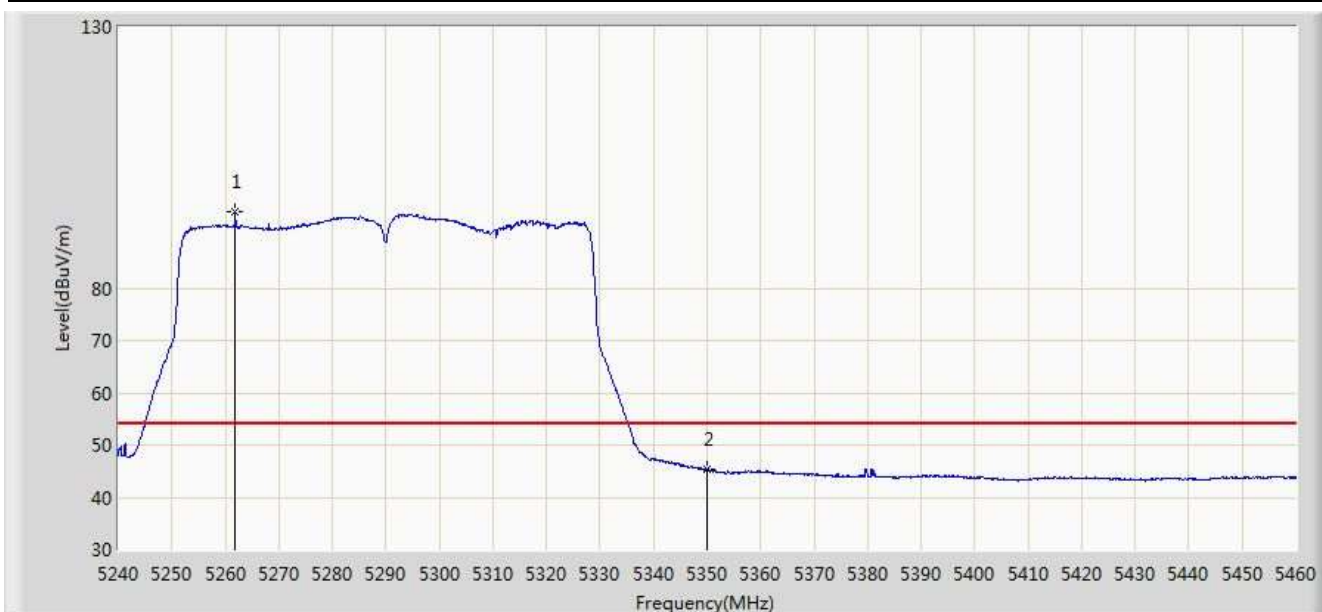


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5261.890	94.650	90.809	N/A	N/A	3.841	AV
2			5350.000	45.277	41.372	-8.723	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

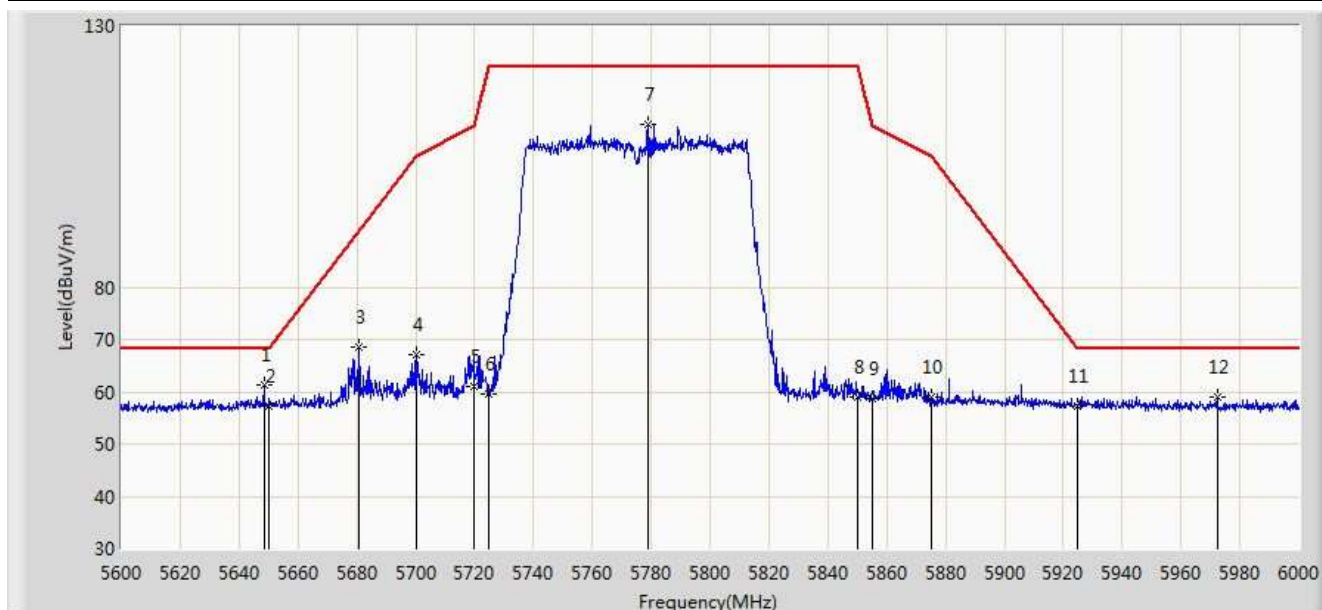


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5648.400	61.425	56.759	-6.775	68.200	4.666	PK
2			5650.000	57.180	52.509	-11.020	68.200	4.671	PK
3			5680.800	68.657	63.867	-22.373	91.031	4.790	PK
4			5700.000	67.020	62.142	-38.180	105.200	4.878	PK
5			5720.000	61.044	56.047	-49.756	110.800	4.997	PK
6			5725.000	59.648	54.619	-62.552	122.200	5.029	PK
7			5778.800	111.262	105.927	N/A	N/A	5.336	PK
8			5850.000	58.933	53.207	-63.267	122.200	5.726	PK
9			5855.000	58.819	53.073	-51.981	110.800	5.746	PK
10			5875.000	58.852	53.032	-46.348	105.200	5.820	PK
11			5925.000	57.379	51.413	-10.821	68.200	5.967	PK
12			5972.200	59.028	52.963	-9.172	68.200	6.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/03 - 17:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

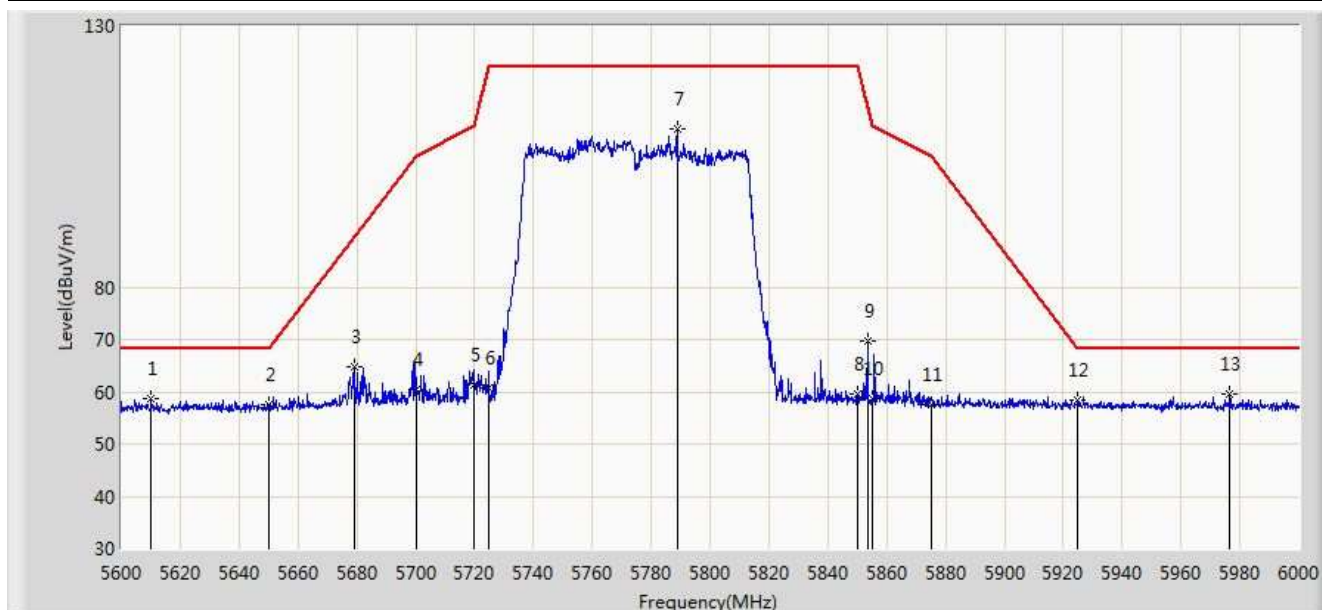


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5610.200	58.799	54.247	-9.401	68.200	4.552	PK
2			5650.000	57.420	52.749	-10.780	68.200	4.671	PK
3			5679.200	64.784	60.000	-25.064	89.848	4.785	PK
4			5700.000	60.437	55.559	-44.763	105.200	4.878	PK
5			5720.000	61.227	56.230	-49.573	110.800	4.997	PK
6			5725.000	60.615	55.586	-61.585	122.200	5.029	PK
7			5789.000	110.146	104.759	N/A	N/A	5.386	PK
8			5850.000	59.641	53.915	-62.559	122.200	5.726	PK
9			5853.400	69.729	63.989	-44.718	114.447	5.739	PK
10			5855.000	58.723	52.977	-52.077	110.800	5.746	PK
11			5875.000	57.656	51.836	-47.544	105.200	5.820	PK
12			5925.000	58.442	52.476	-9.758	68.200	5.967	PK
13		*	5976.400	59.677	53.605	-8.523	68.200	6.072	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 15:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

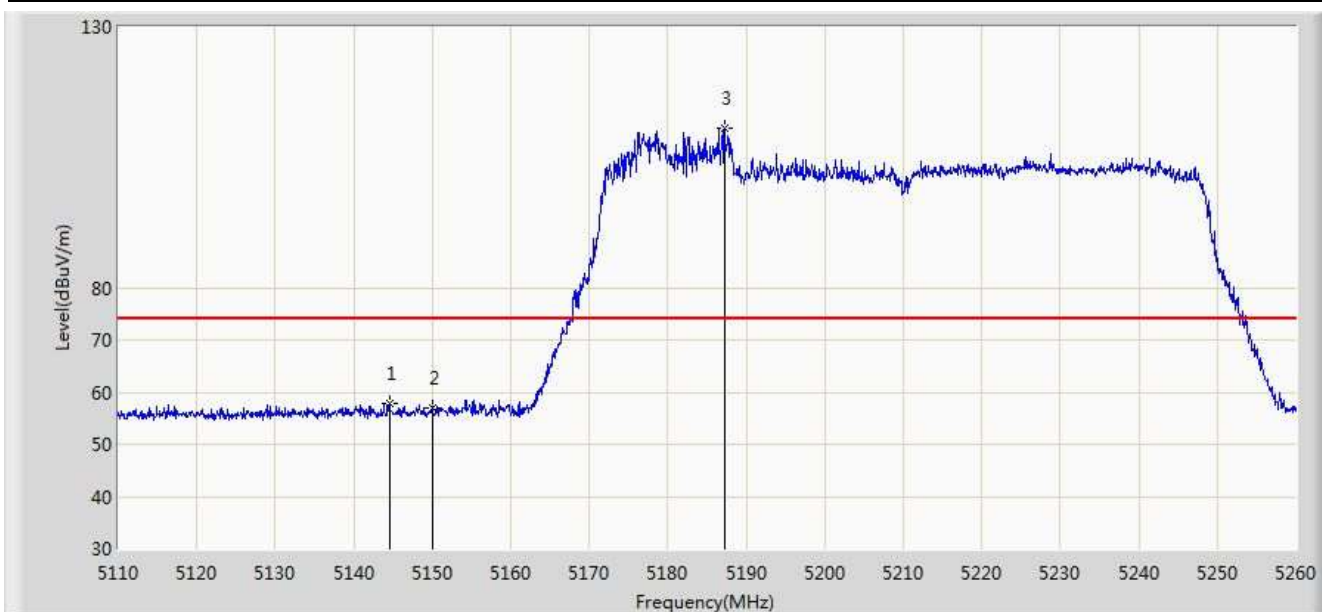


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.500	57.813	53.637	-16.187	74.000	4.176	PK
2			5150.000	57.086	52.917	-16.914	74.000	4.170	PK
3		*	5187.175	110.614	106.571	N/A	N/A	4.043	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

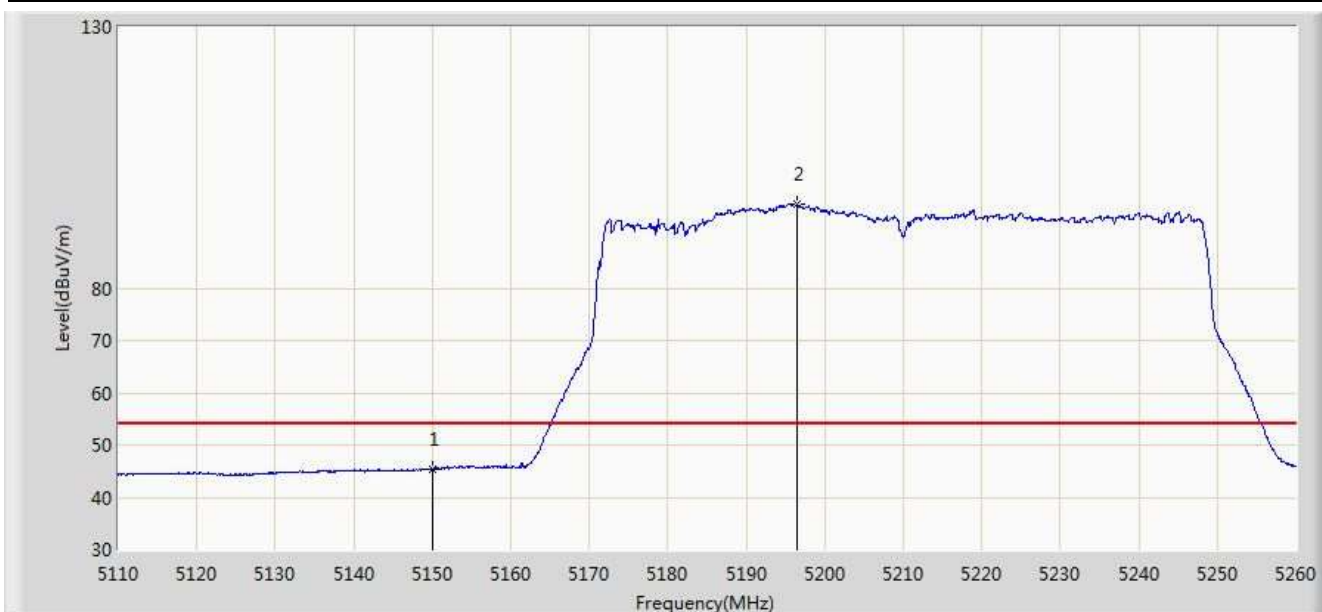


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.343	41.174	-8.657	54.000	4.170	AV
2		*	5196.475	96.071	92.061	N/A	N/A	4.010	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

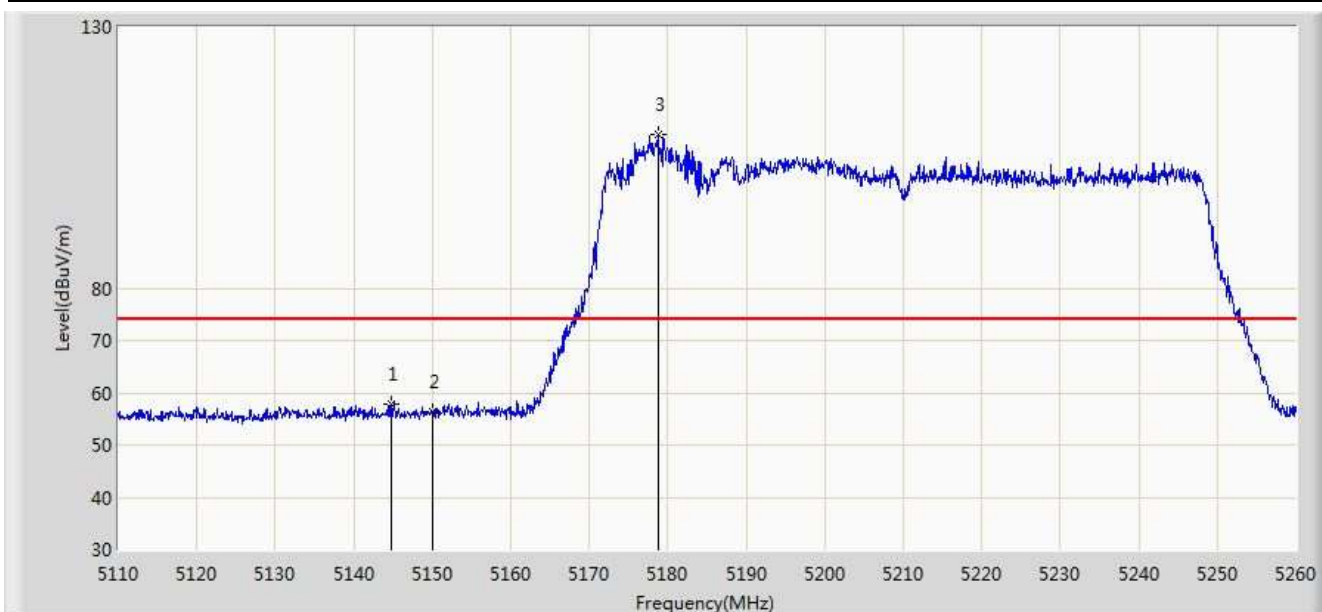


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.800	57.869	53.693	-16.131	74.000	4.175	PK
2			5150.000	56.286	52.117	-17.714	74.000	4.170	PK
3		*	5178.775	109.319	105.246	N/A	N/A	4.073	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

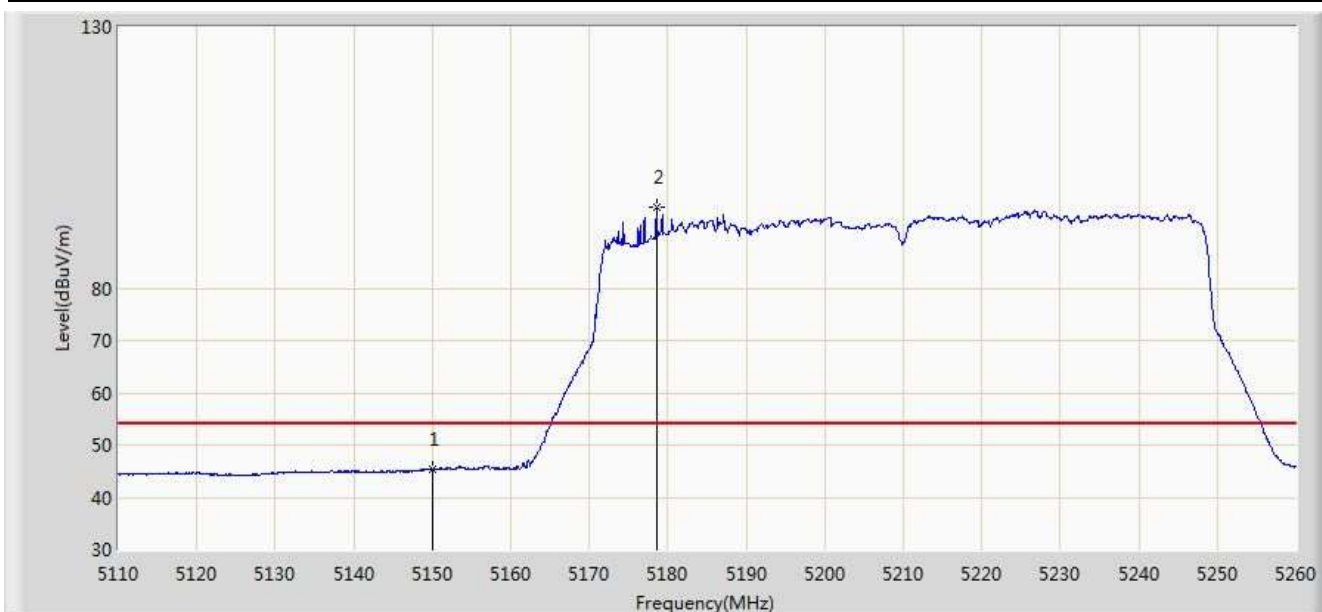


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.225	41.056	-8.775	54.000	4.170	AV
2		*	5178.625	95.374	91.300	N/A	N/A	4.074	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

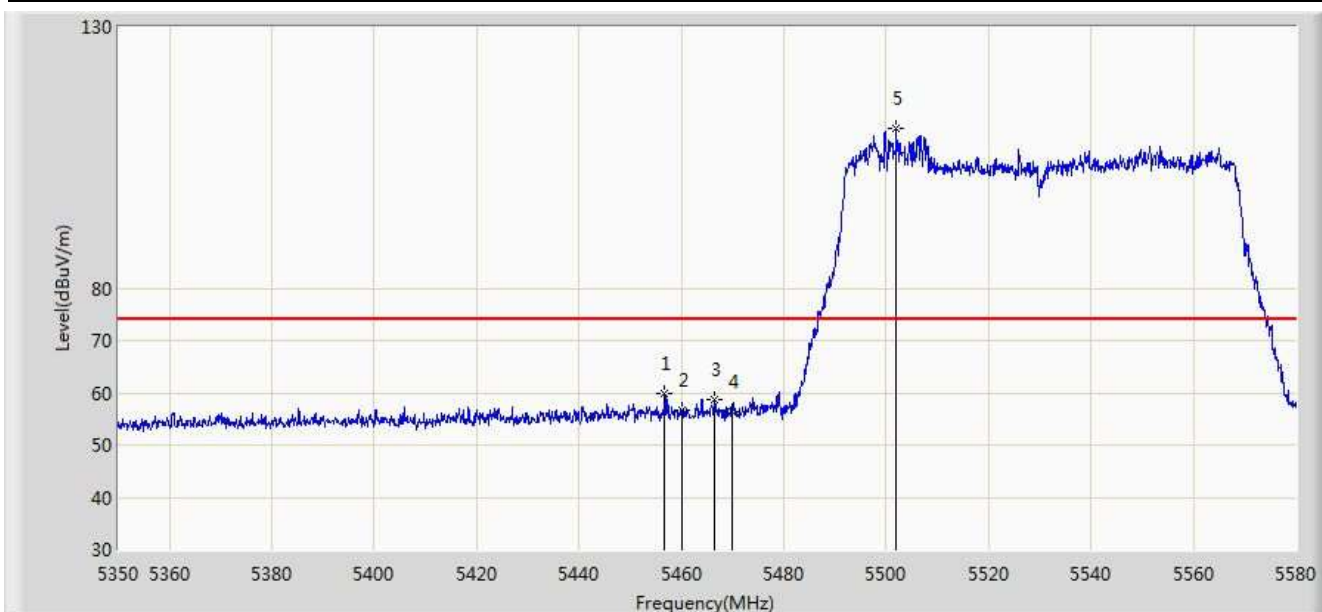


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.720	59.954	55.781	-14.046	74.000	4.173	PK
2			5460.000	56.709	52.529	-17.291	74.000	4.180	PK
3			5466.495	58.577	54.382	-15.423	74.000	4.194	PK
4			5470.000	56.497	52.295	-17.503	74.000	4.202	PK
5		*	5501.915	110.694	106.416	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

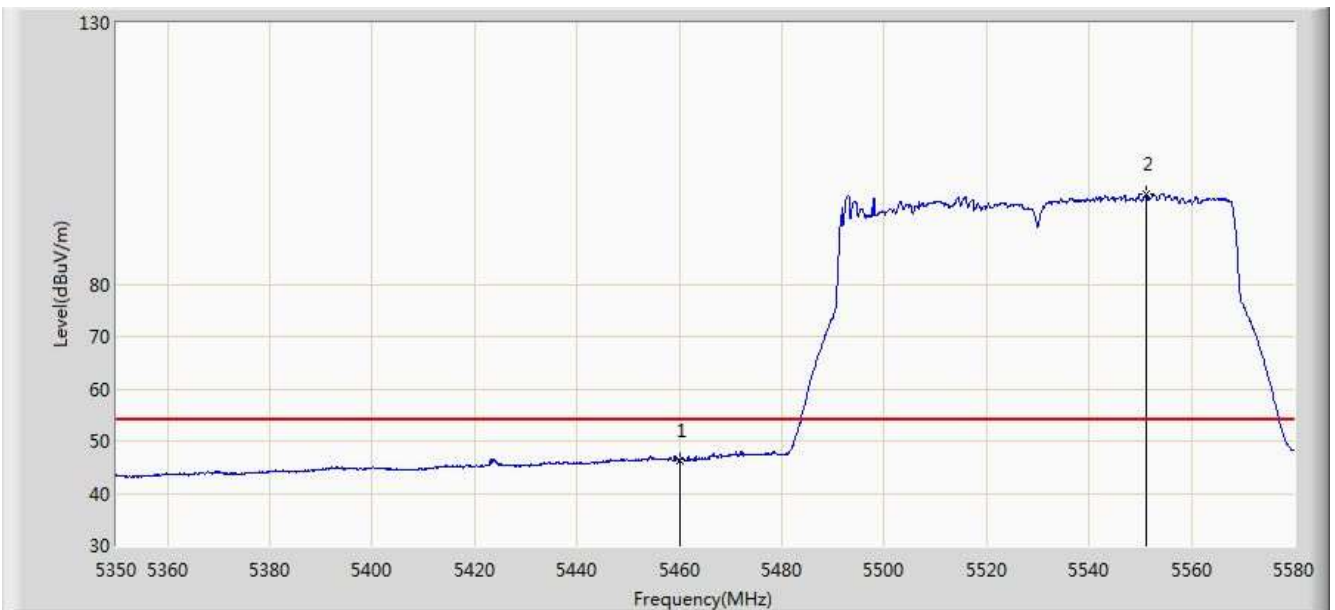


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.306	42.126	-7.694	54.000	4.180	AV
2		*	5551.135	97.267	92.846	N/A	N/A	4.421	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

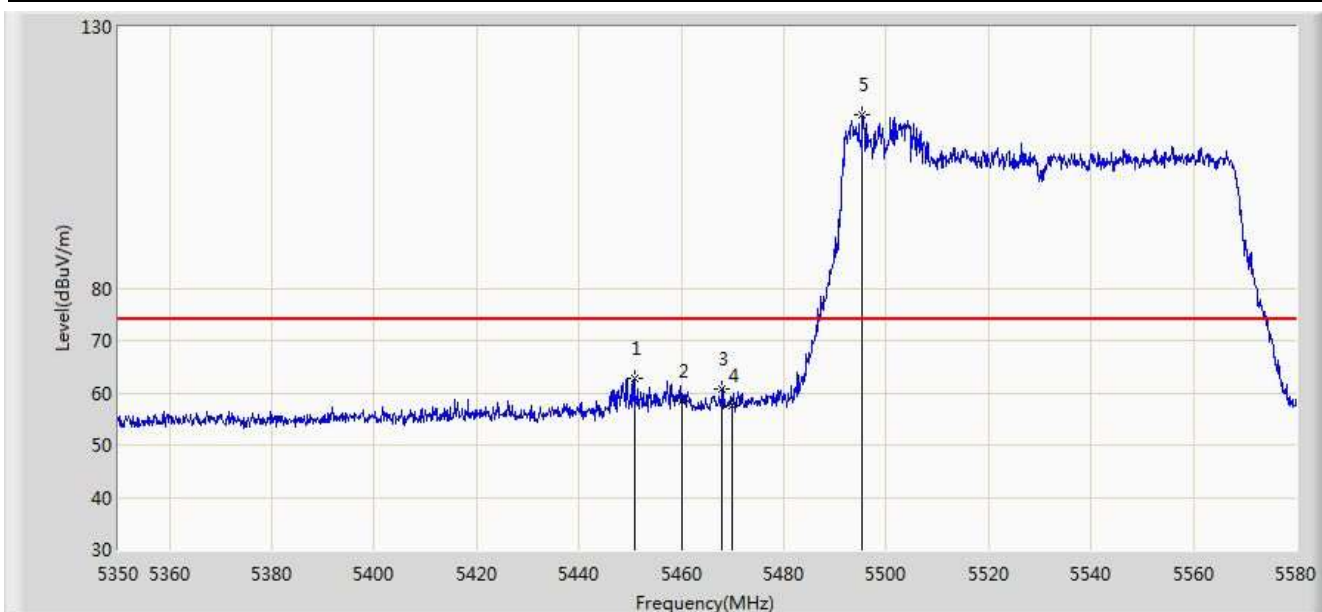


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.740	62.775	58.618	-11.225	74.000	4.157	PK
2			5460.000	58.505	54.325	-15.495	74.000	4.180	PK
3			5467.990	60.626	56.428	-13.374	74.000	4.198	PK
4			5470.000	57.571	53.369	-16.429	74.000	4.202	PK
5		*	5495.360	113.227	108.967	N/A	N/A	4.259	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

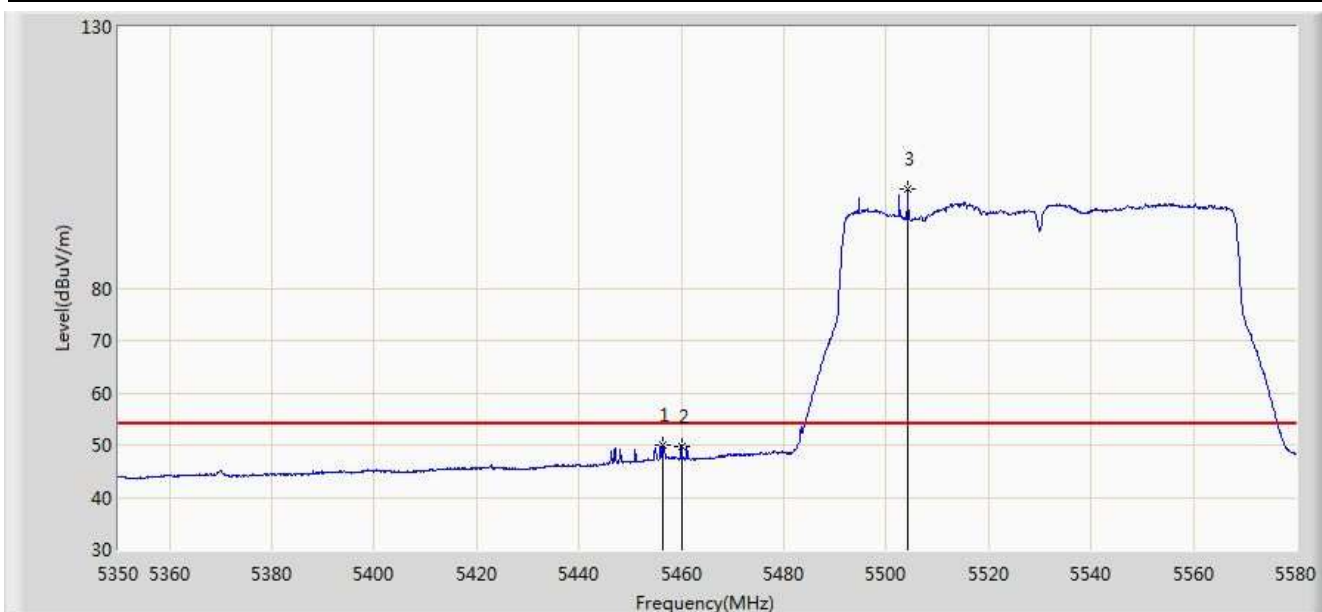


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.490	49.892	45.719	-4.108	54.000	4.172	AV
2			5460.000	49.745	45.565	-4.255	54.000	4.180	AV
3		*	5504.215	98.958	94.674	N/A	N/A	4.284	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

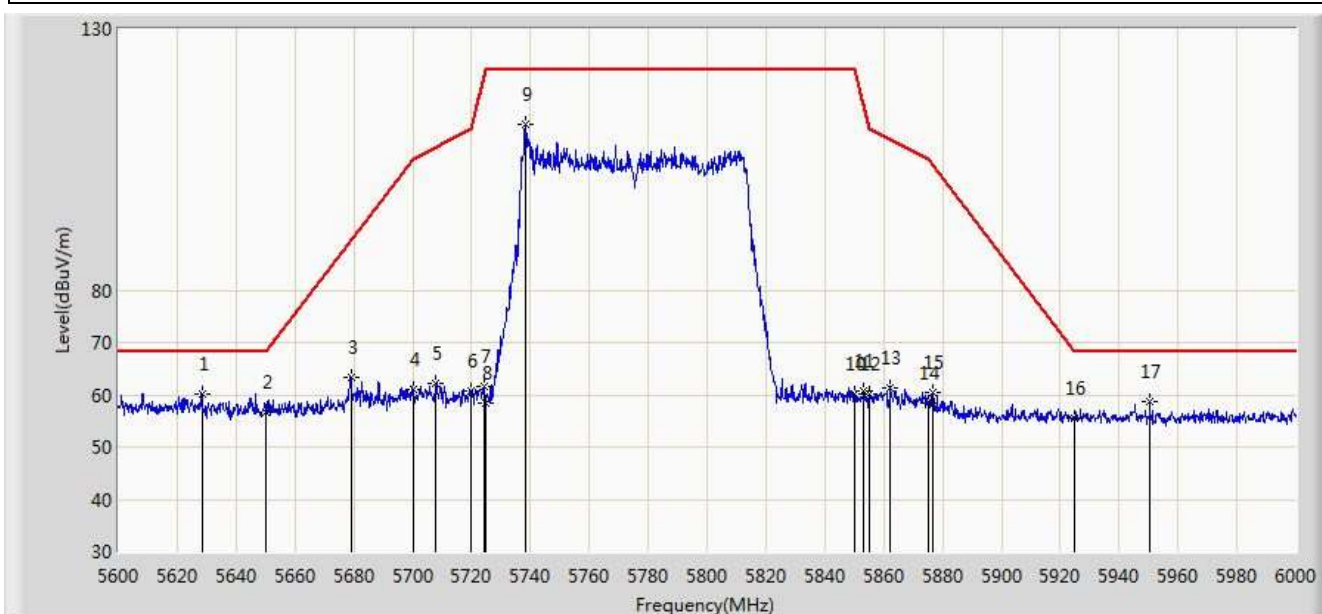


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5628.400	60.055	55.450	-8.145	68.200	4.604	PK
2			5650.000	56.529	51.858	-11.671	68.200	4.671	PK
3			5679.000	63.397	58.614	-26.302	89.700	4.782	PK
4			5700.000	60.944	56.066	-44.256	105.200	4.878	PK
5			5708.000	62.102	57.181	-45.341	107.442	4.921	PK
6			5720.000	60.746	55.749	-50.054	110.800	4.997	PK
7			5724.200	61.503	56.479	-58.874	120.377	5.024	PK
8			5725.000	58.340	53.311	-63.860	122.200	5.029	PK
9			5738.200	111.680	106.567	N/A	N/A	5.113	PK
10			5850.000	60.232	54.506	-61.968	122.200	5.726	PK
11			5853.200	60.674	54.935	-54.229	114.903	5.739	PK
12			5855.000	60.129	54.383	-50.671	110.800	5.746	PK
13			5862.400	61.314	55.537	-47.412	108.726	5.776	PK
14			5875.000	58.385	52.565	-46.815	105.200	5.820	PK

15			5876.600	60.380	54.555	-43.631	104.011	5.826	PK
16			5925.000	55.509	49.543	-12.691	68.200	5.967	PK
17			5950.400	58.829	52.802	-9.371	68.200	6.027	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

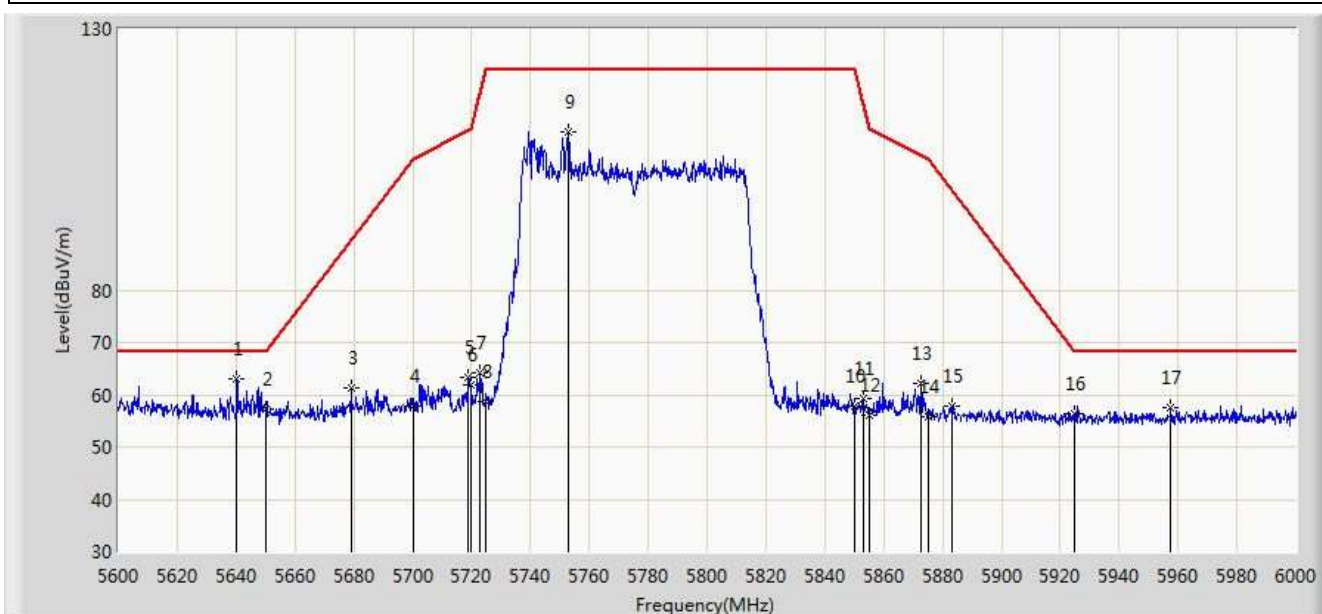


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5640.200	62.939	58.300	-5.261	68.200	4.638	PK
2			5650.000	57.187	52.516	-11.013	68.200	4.671	PK
3			5679.200	61.259	56.475	-28.589	89.848	4.785	PK
4			5700.000	57.863	52.985	-47.337	105.200	4.878	PK
5			5719.000	63.277	58.287	-47.243	110.520	4.990	PK
6			5720.000	61.949	56.952	-48.851	110.800	4.997	PK
7			5722.800	64.126	59.111	-53.059	117.185	5.015	PK
8			5725.000	58.588	53.559	-63.612	122.200	5.029	PK
9			5753.000	110.354	105.154	N/A	N/A	5.200	PK
10			5850.000	57.957	52.231	-64.243	122.200	5.726	PK
11			5853.200	59.252	53.513	-55.651	114.903	5.739	PK
12			5855.000	56.231	50.485	-54.569	110.800	5.746	PK
13			5872.600	62.121	56.309	-43.750	105.871	5.812	PK
14			5875.000	55.888	50.068	-49.312	105.200	5.820	PK

15			5883.400	57.750	51.901	-41.212	98.962	5.848	PK
16			5925.000	56.449	50.483	-11.751	68.200	5.967	PK
17			5957.600	57.516	51.476	-10.684	68.200	6.040	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

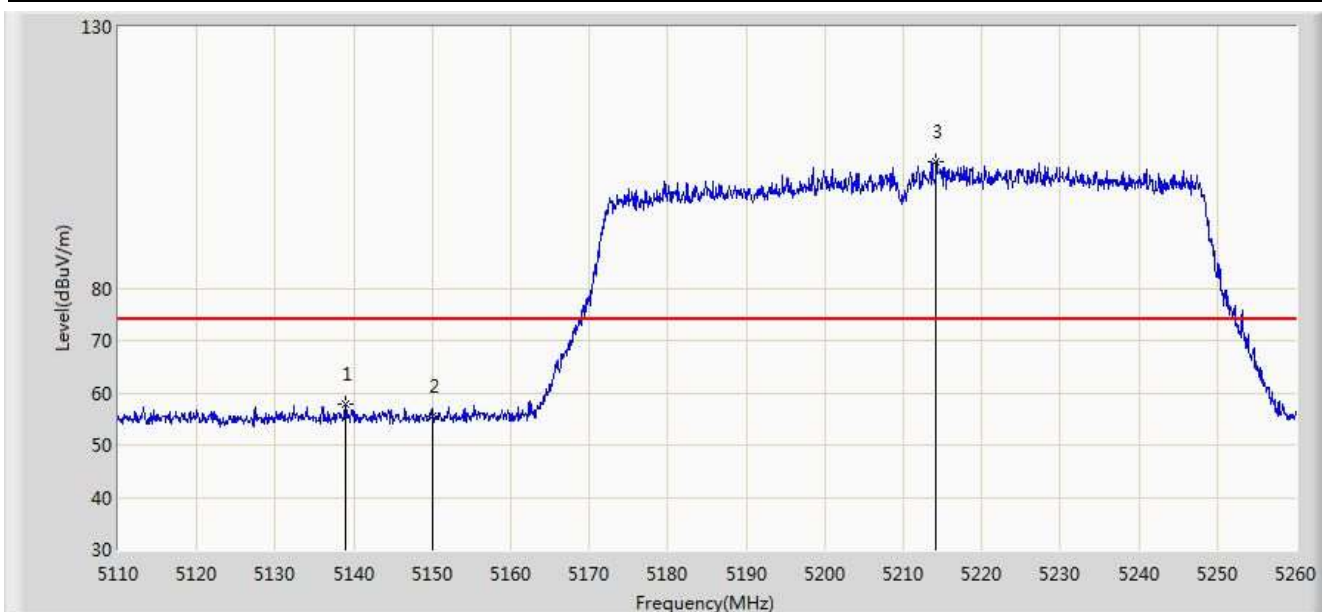

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.875	57.691	53.516	-16.309	74.000	4.175	PK
2			5150.000	55.614	51.445	-18.386	74.000	4.170	PK
3		*	5214.175	104.199	100.243	N/A	N/A	3.956	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.122	40.953	-8.878	54.000	4.170	AV
2		*	5247.100	91.536	87.677	N/A	N/A	3.860	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

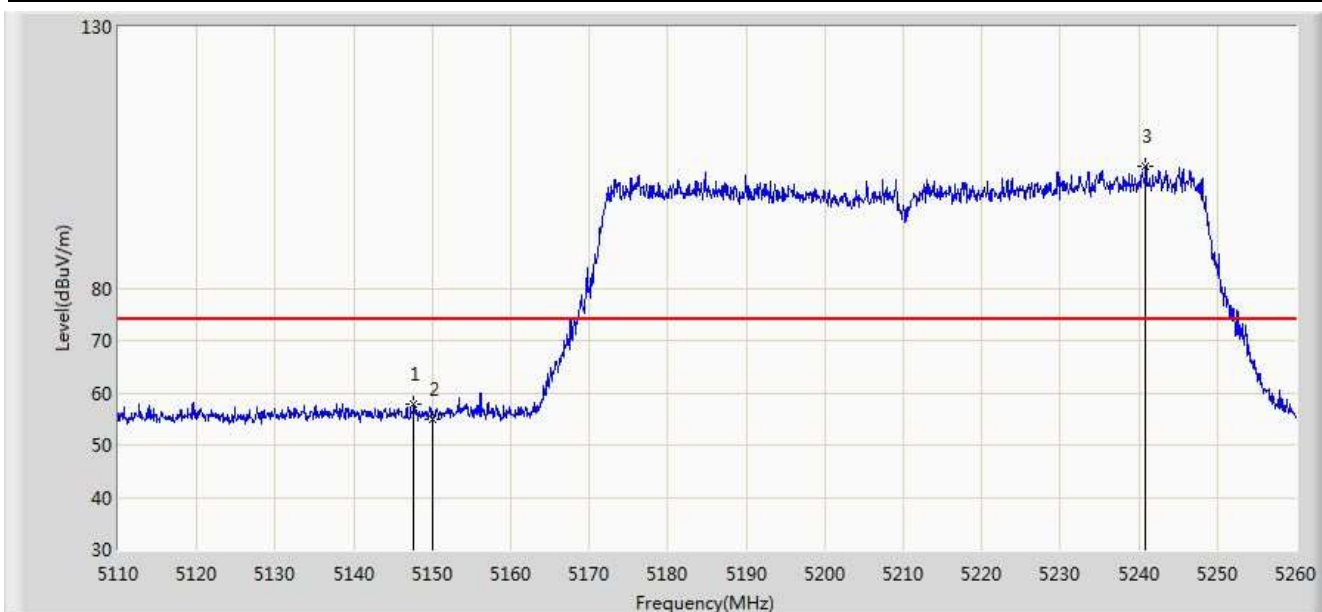

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.650	57.848	53.672	-16.152	74.000	4.176	PK
2			5150.000	54.901	50.732	-19.099	74.000	4.170	PK
3		*	5240.875	103.356	99.479	N/A	N/A	3.877	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.389	41.220	-8.611	54.000	4.170	AV
2		*	5238.700	89.806	85.922	N/A	N/A	3.884	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

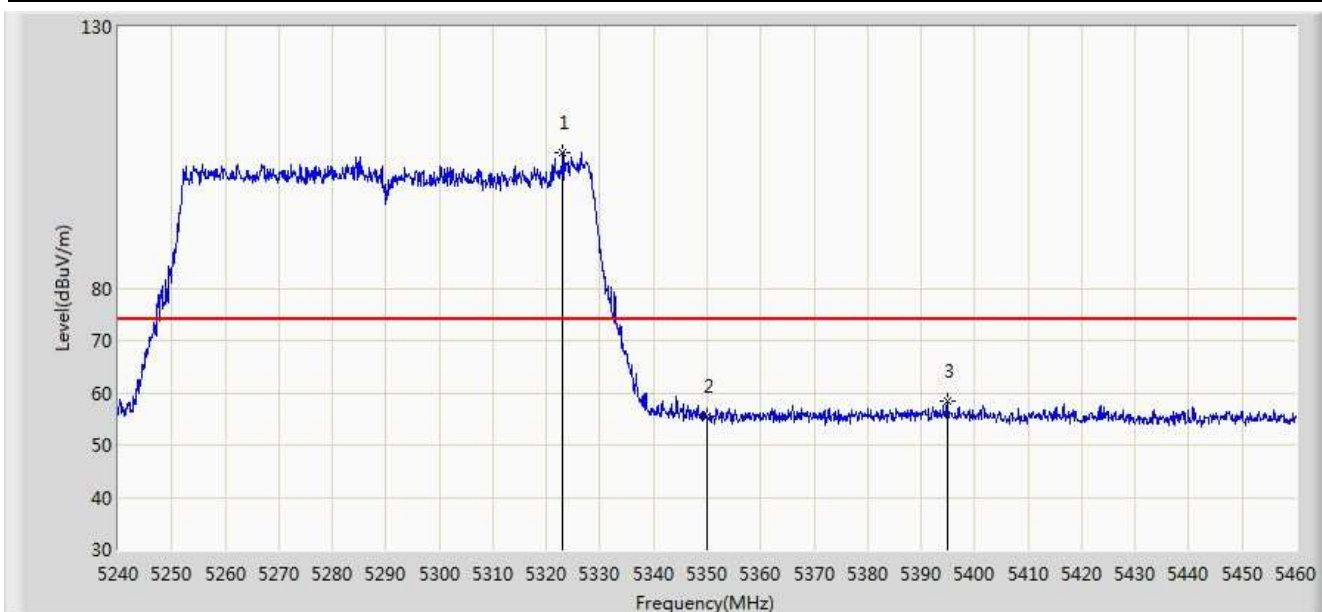


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.050	105.968	102.114	N/A	N/A	3.855	PK
2			5350.000	55.556	51.651	-18.444	74.000	3.904	PK
3			5394.880	58.438	54.449	-15.562	74.000	3.989	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

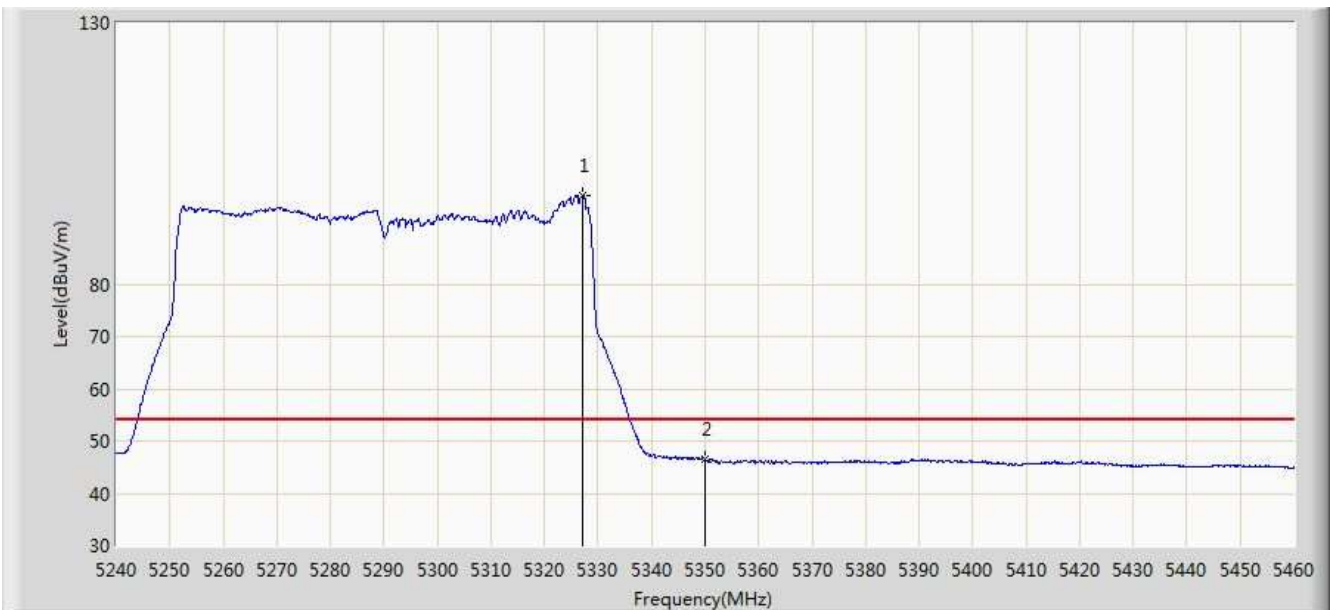


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.120	96.936	93.074	N/A	N/A	3.862	AV
2			5350.000	46.444	42.539	-7.556	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

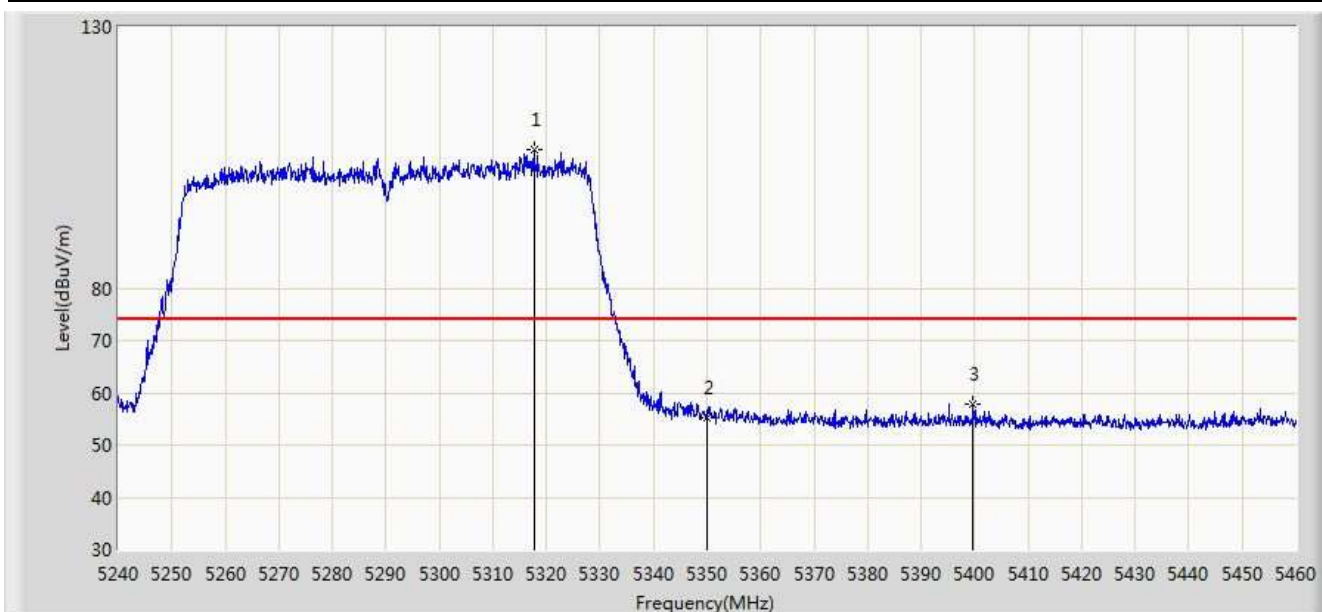


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.660	106.664	102.820	N/A	N/A	3.844	PK
2			5350.000	55.207	51.302	-18.793	74.000	3.904	PK
3			5399.610	57.800	53.800	-16.200	74.000	4.001	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

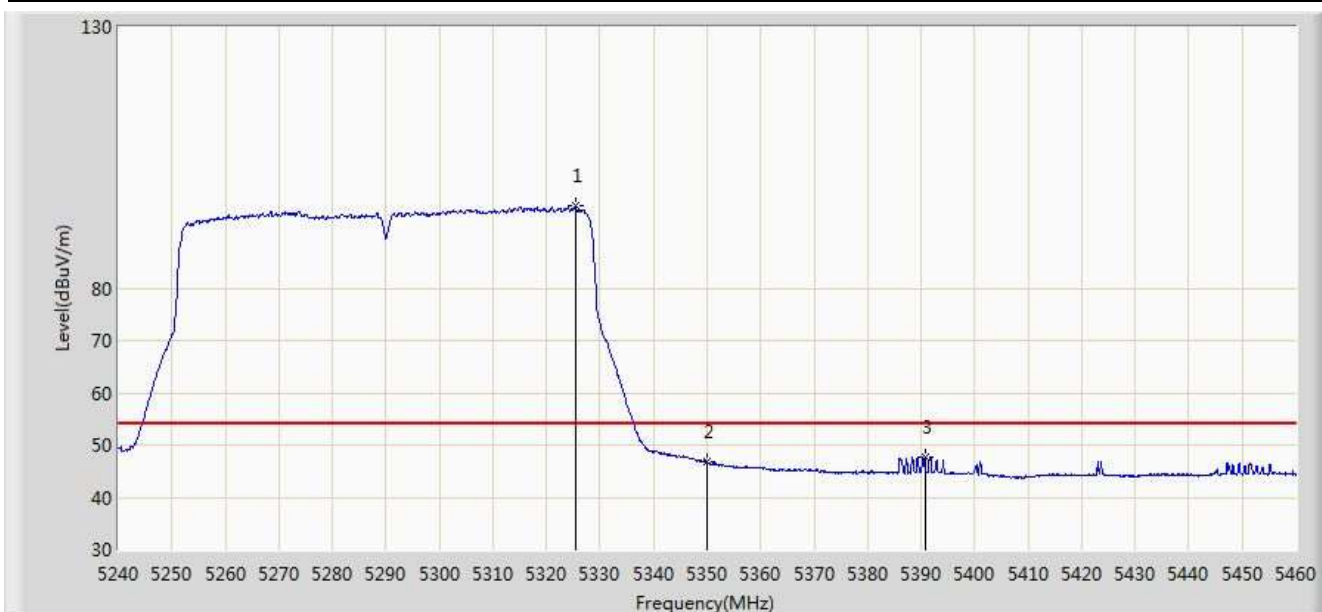


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.580	95.687	91.828	N/A	N/A	3.860	AV
2			5350.000	46.679	42.774	-7.321	54.000	3.904	AV
3			5390.700	47.766	43.786	-6.234	54.000	3.979	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 16:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

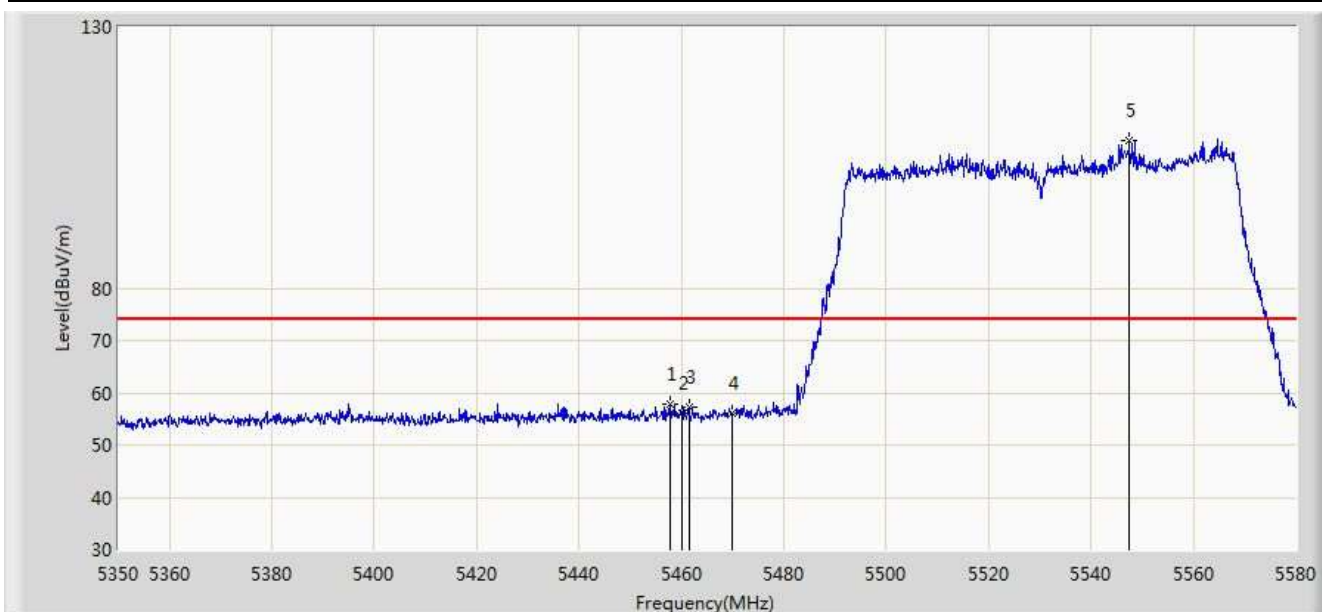


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.755	57.875	53.699	-16.125	74.000	4.176	PK
2			5460.000	56.181	52.001	-17.819	74.000	4.180	PK
3			5461.550	57.303	53.119	-16.697	74.000	4.184	PK
4			5470.000	56.227	52.025	-17.773	74.000	4.202	PK
5		*	5547.455	108.217	103.806	N/A	N/A	4.411	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 17:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

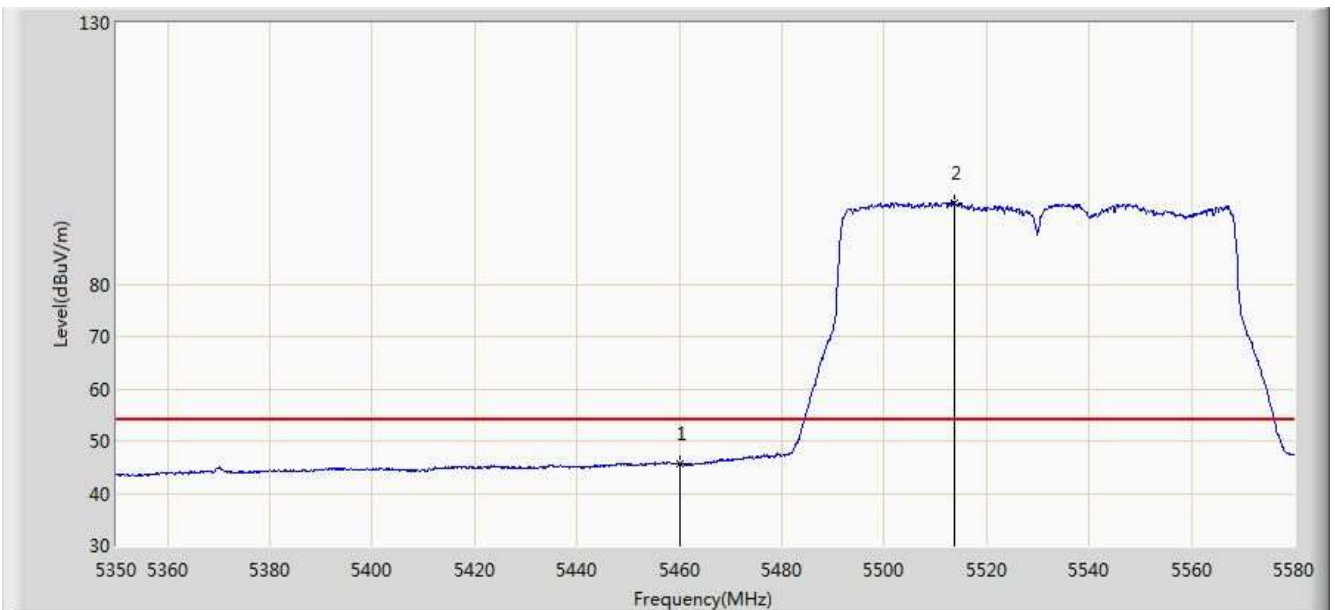


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.671	41.491	-8.329	54.000	4.180	AV
2		*	5513.760	95.624	91.312	N/A	N/A	4.313	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 17:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

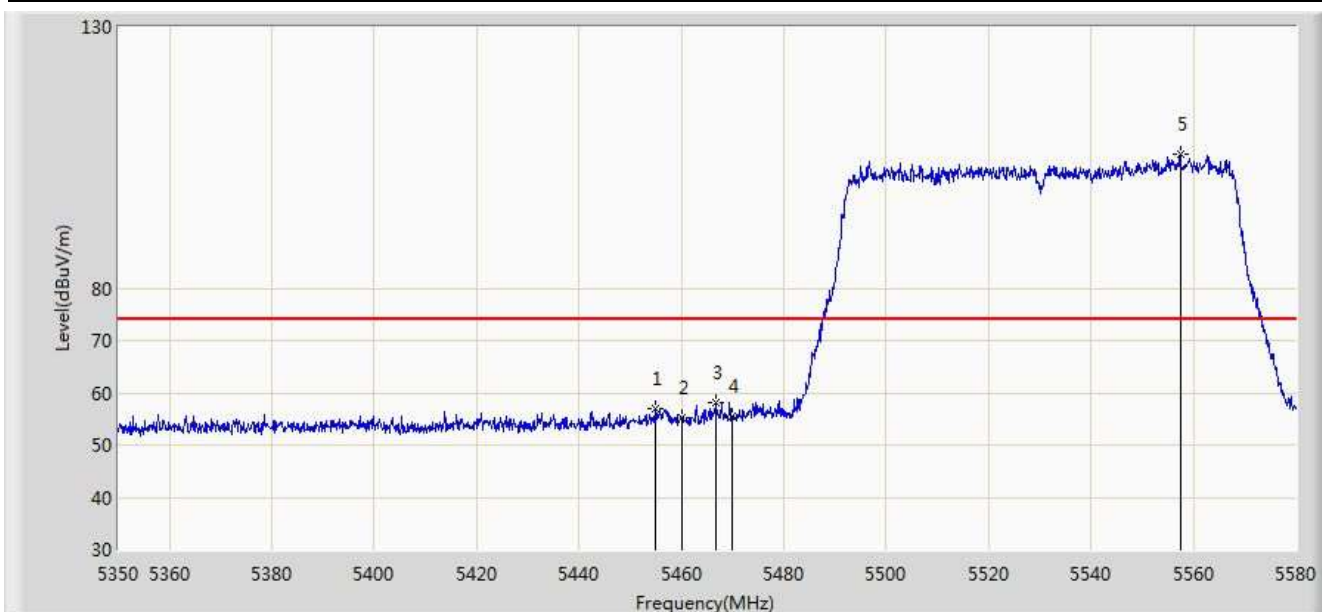


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.880	57.064	52.895	-16.936	74.000	4.170	PK
2			5460.000	55.155	50.975	-18.845	74.000	4.180	PK
3			5466.725	58.171	53.976	-15.829	74.000	4.196	PK
4			5470.000	55.513	51.311	-18.487	74.000	4.202	PK
5		*	5557.460	105.586	101.149	N/A	N/A	4.437	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 17:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

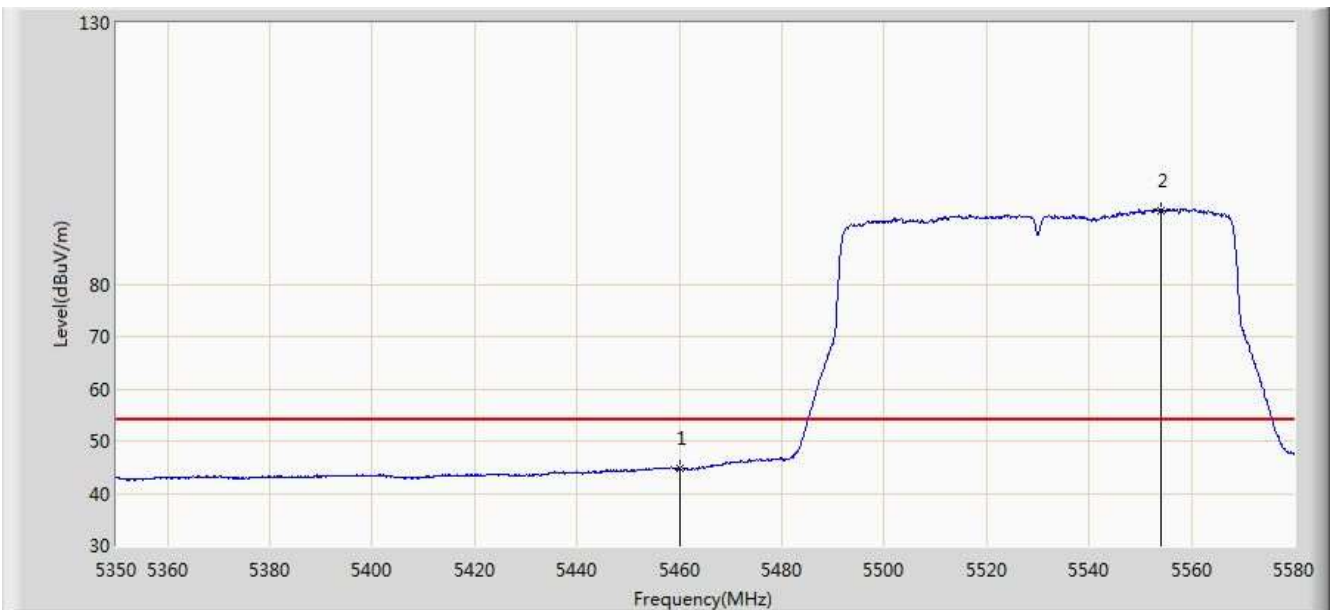


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.722	40.542	-9.278	54.000	4.180	AV
2		*	5554.125	94.174	89.745	N/A	N/A	4.429	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 17:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

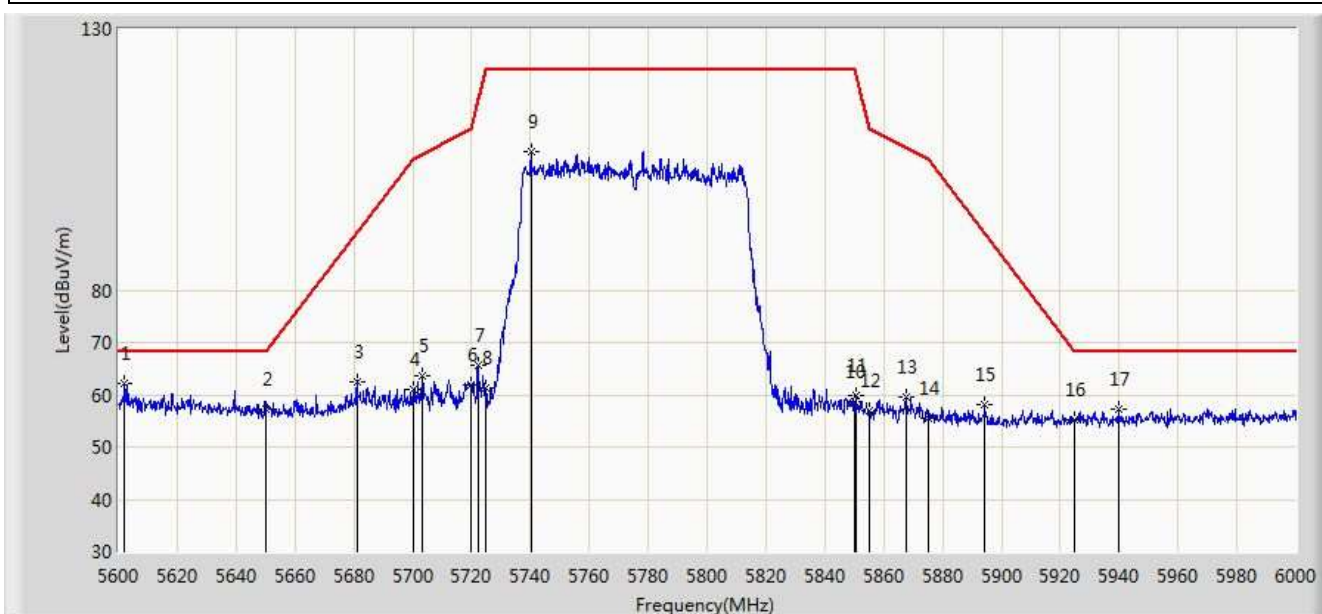


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5602.000	62.196	57.664	-6.004	68.200	4.532	PK
2			5650.000	57.390	52.719	-10.810	68.200	4.671	PK
3			5681.200	62.532	57.740	-28.794	91.326	4.792	PK
4			5700.000	61.154	56.276	-44.046	105.200	4.878	PK
5			5703.400	63.567	58.671	-42.586	106.153	4.897	PK
6			5720.000	61.831	56.834	-48.969	110.800	4.997	PK
7			5722.200	65.745	60.734	-50.072	115.817	5.010	PK
8			5725.000	61.284	56.255	-60.916	122.200	5.029	PK
9			5740.400	106.465	101.338	N/A	N/A	5.127	PK
10			5850.000	58.598	52.872	-63.602	122.200	5.726	PK
11			5850.400	59.790	54.063	-61.497	121.288	5.727	PK
12			5855.000	56.999	51.253	-53.801	110.800	5.746	PK
13			5867.600	59.430	53.636	-47.839	107.270	5.795	PK
14			5875.000	55.647	49.827	-49.553	105.200	5.820	PK

15			5894.200	58.085	52.199	-32.870	90.955	5.886	PK
16			5925.000	55.199	49.233	-13.001	68.200	5.967	PK
17			5939.800	57.195	51.192	-11.005	68.200	6.004	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 17:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (ANT-2x2-5005)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

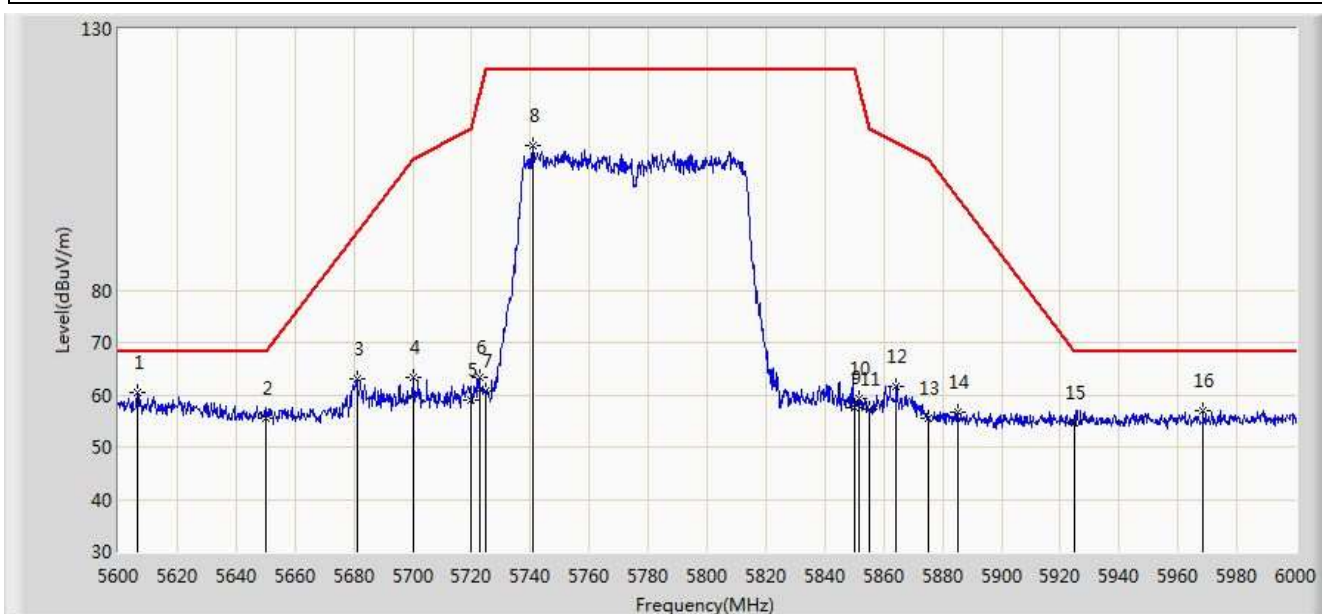


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5606.600	60.348	55.806	-7.852	68.200	4.542	PK
2			5650.000	55.520	50.849	-12.680	68.200	4.671	PK
3			5681.000	63.073	58.282	-28.105	91.178	4.792	PK
4			5700.000	63.230	58.352	-41.970	105.200	4.878	PK
5			5720.000	59.030	54.033	-51.770	110.800	4.997	PK
6			5722.600	63.190	58.176	-53.540	116.729	5.014	PK
7			5725.000	60.852	55.823	-61.348	122.200	5.029	PK
8			5741.000	107.603	102.472	N/A	N/A	5.130	PK
9			5850.000	57.513	51.787	-64.687	122.200	5.726	PK
10			5851.800	59.318	53.585	-58.777	118.095	5.733	PK
11			5855.000	57.182	51.436	-53.618	110.800	5.746	PK
12			5864.400	61.533	55.750	-46.632	108.166	5.783	PK
13			5875.000	55.443	49.623	-49.757	105.200	5.820	PK
14			5885.400	56.698	50.842	-40.781	97.478	5.855	PK

15			5925.000	54.770	48.804	-13.430	68.200	5.967	PK
16			5968.400	56.840	50.782	-11.360	68.200	6.058	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

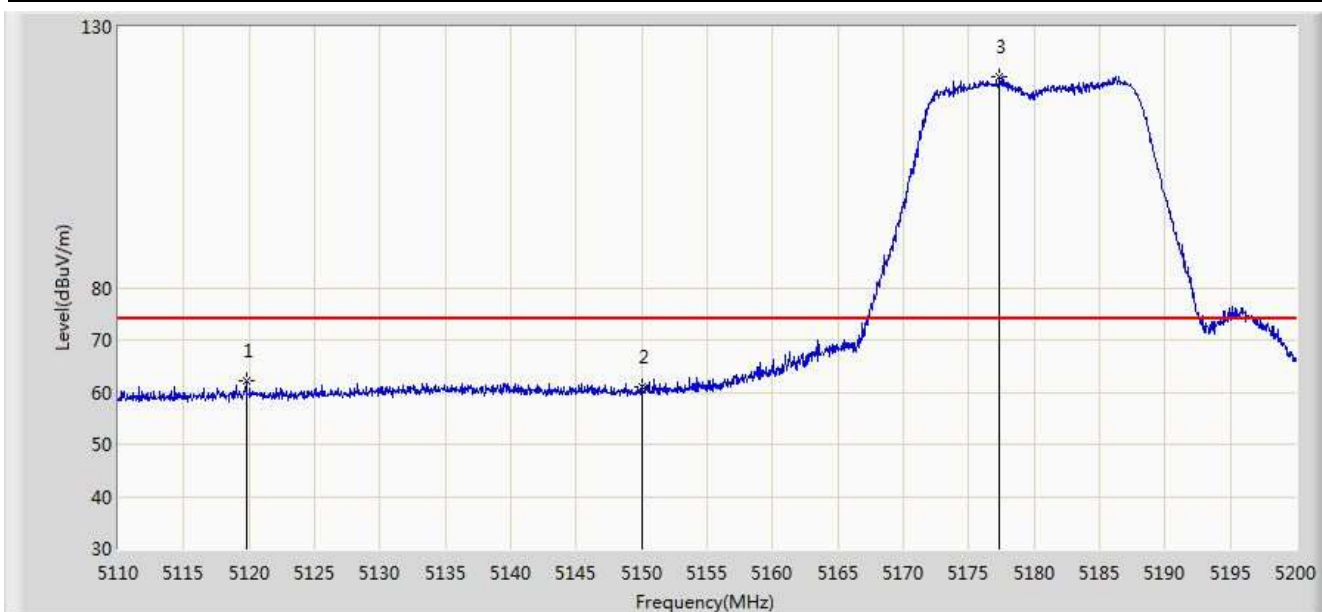


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5119.765	62.179	58.004	-11.821	74.000	4.174	PK
2			5150.000	61.094	56.925	-12.906	74.000	4.170	PK
3			5177.320	120.492	116.414	N/A	N/A	4.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

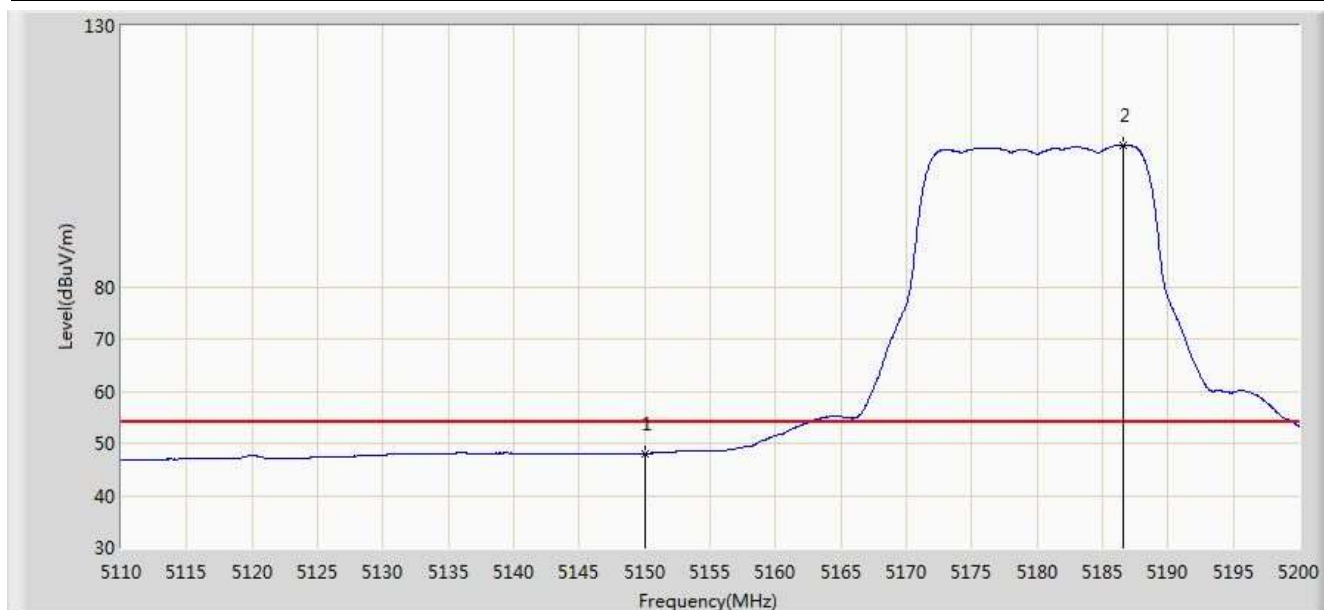


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.067	43.898	-5.933	54.000	4.170	AV
2			5186.590	107.133	103.087	N/A	N/A	4.045	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

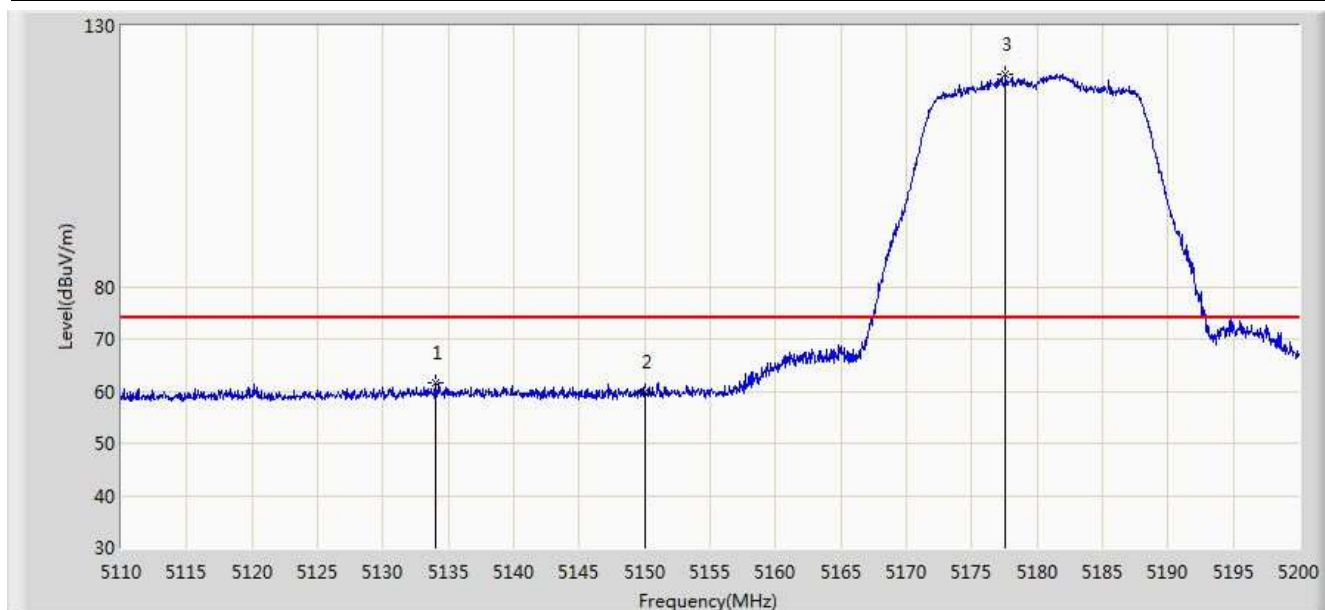


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.985	61.542	57.367	-12.458	74.000	4.175	PK
2			5150.000	59.764	55.595	-14.236	74.000	4.170	PK
3			5177.590	120.619	116.542	N/A	N/A	4.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

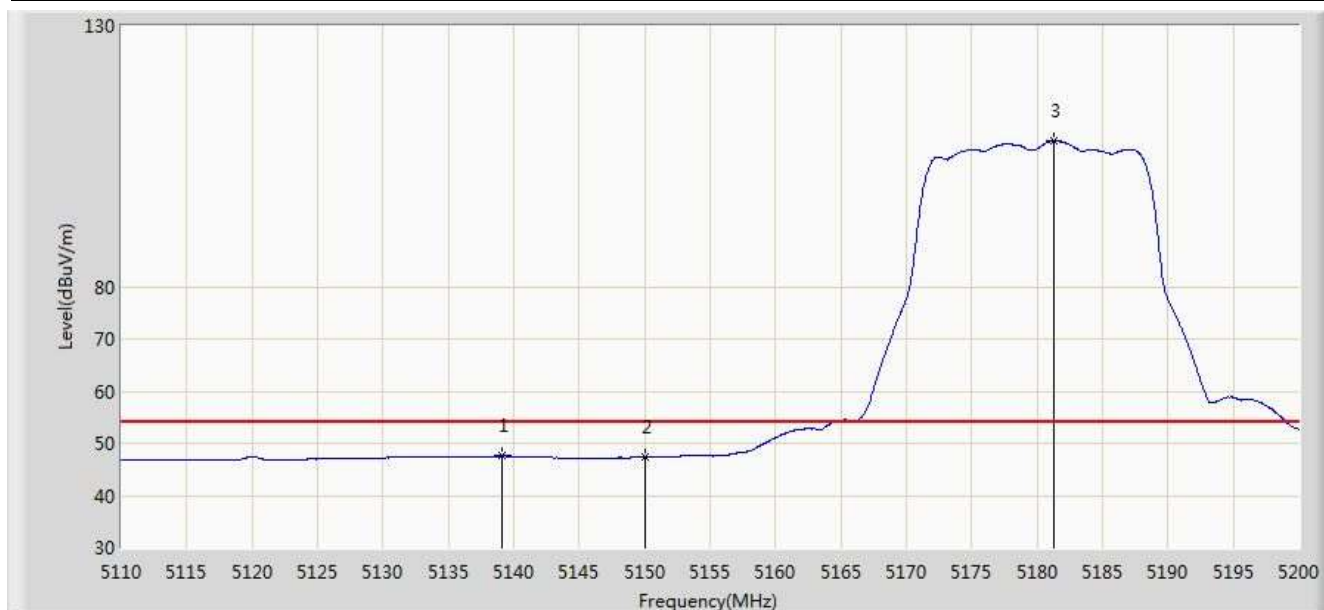


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.115	47.550	43.375	-6.450	54.000	4.176	AV
2			5150.000	47.307	43.138	-6.693	54.000	4.170	AV
3			5181.235	107.948	103.884	N/A	N/A	4.065	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

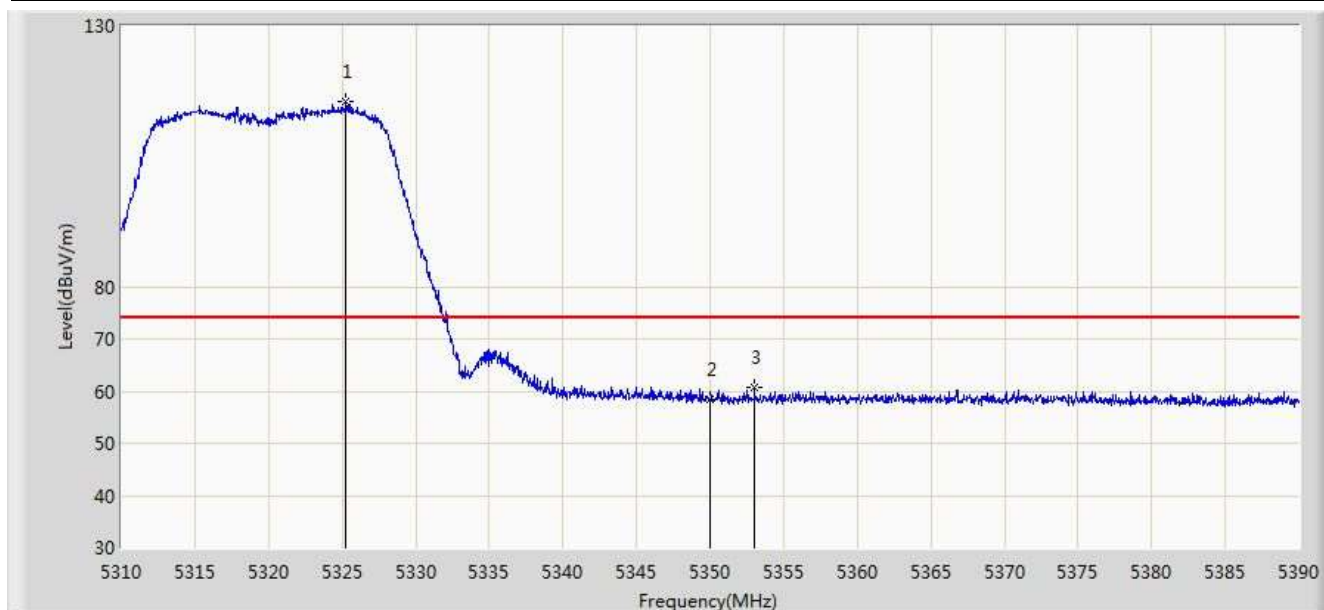


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5325.280	115.408	111.549	N/A	N/A	3.859	PK
2			5350.000	58.550	54.645	-15.450	74.000	3.904	PK
3			5353.000	60.585	56.675	-13.415	74.000	3.911	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

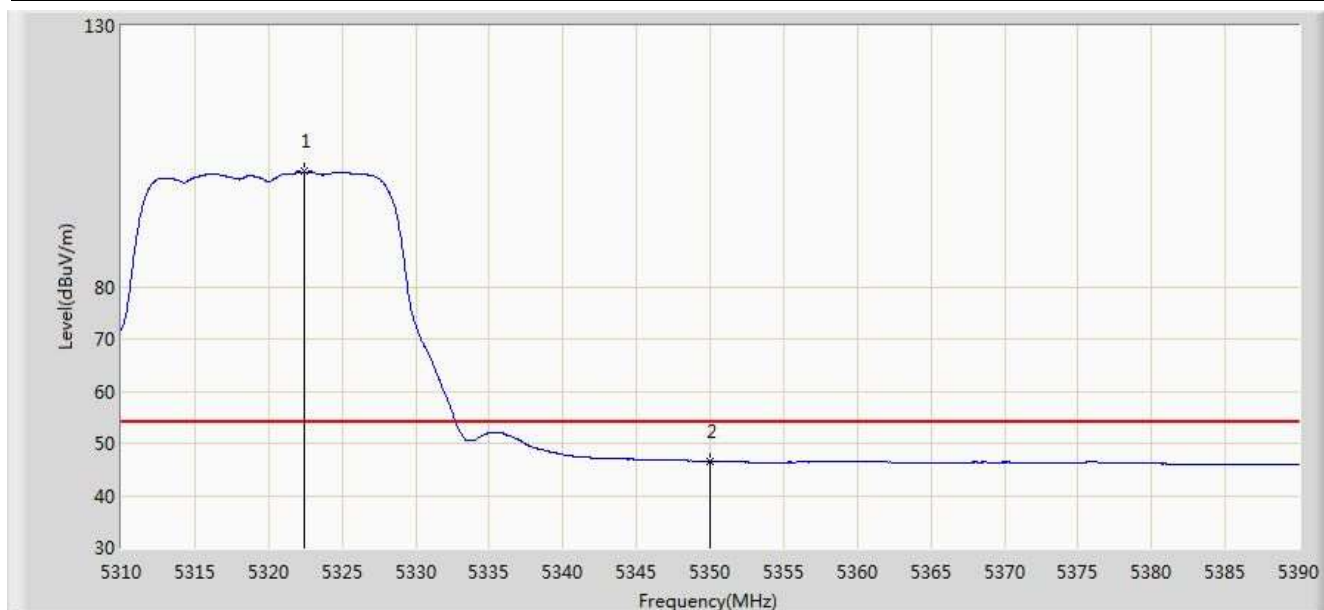


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5322.480	102.033	98.180	N/A	N/A	3.853	AV
2			5350.000	46.508	42.603	-7.492	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

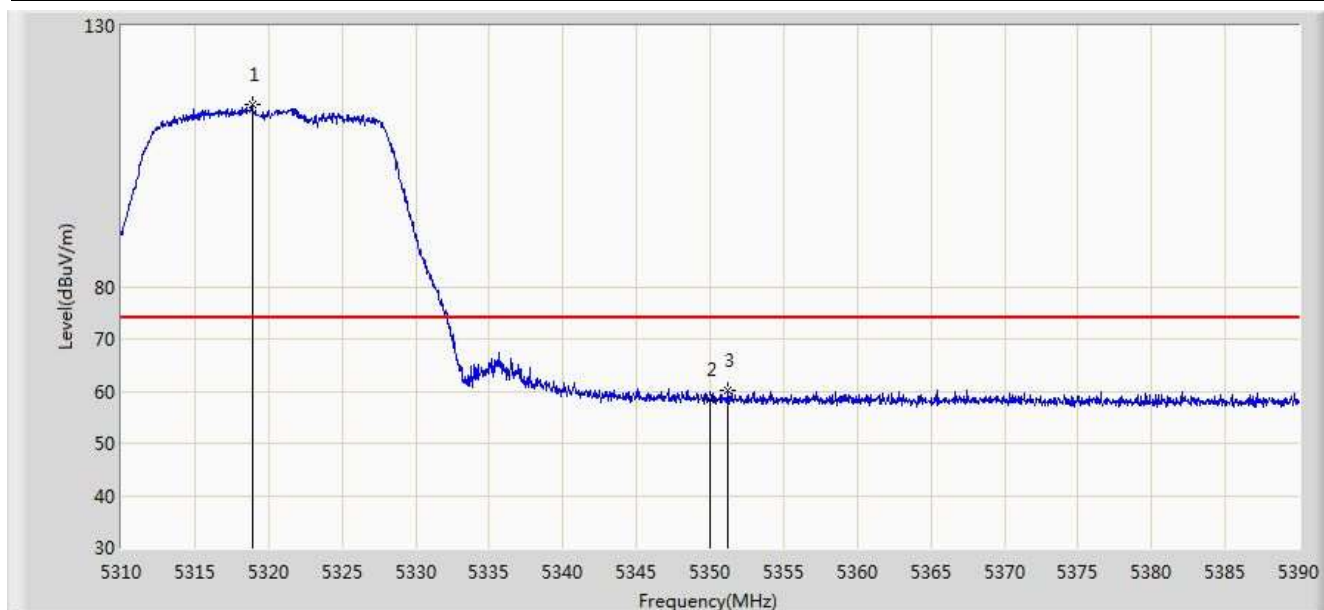


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5318.880	114.915	111.069	N/A	N/A	3.847	PK
2			5350.000	58.342	54.437	-15.658	74.000	3.904	PK
3			5351.240	60.125	56.218	-13.875	74.000	3.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

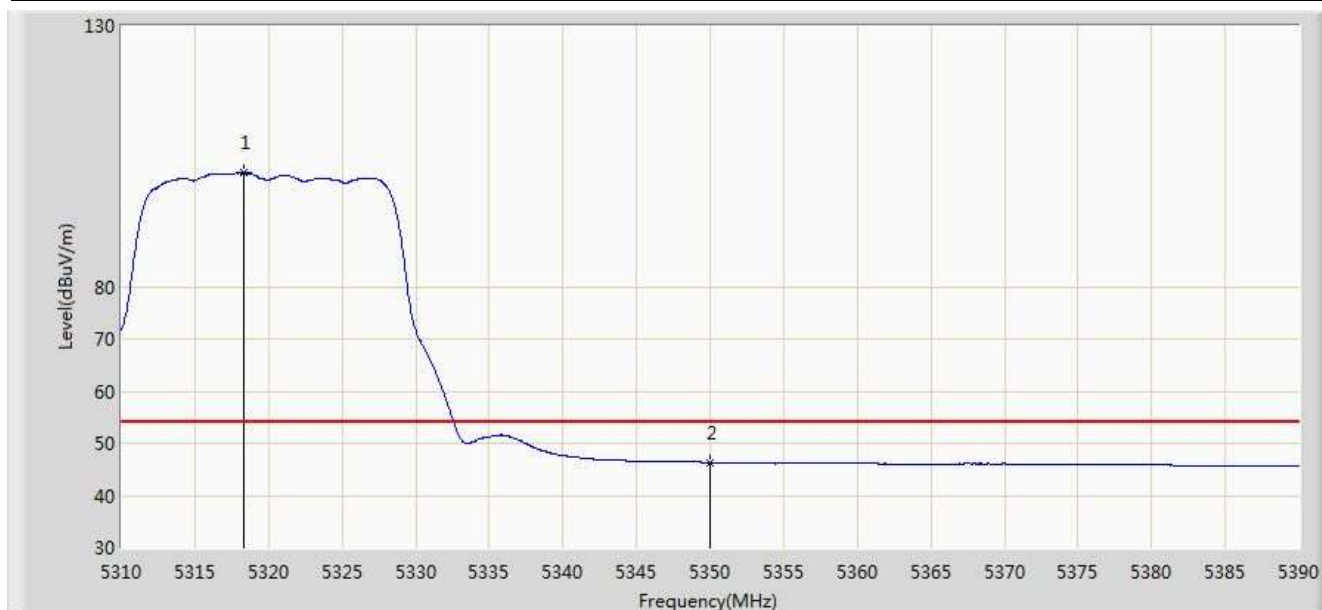


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5318.360	101.787	97.942	N/A	N/A	3.845	AV
2			5350.000	46.301	42.396	-7.699	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

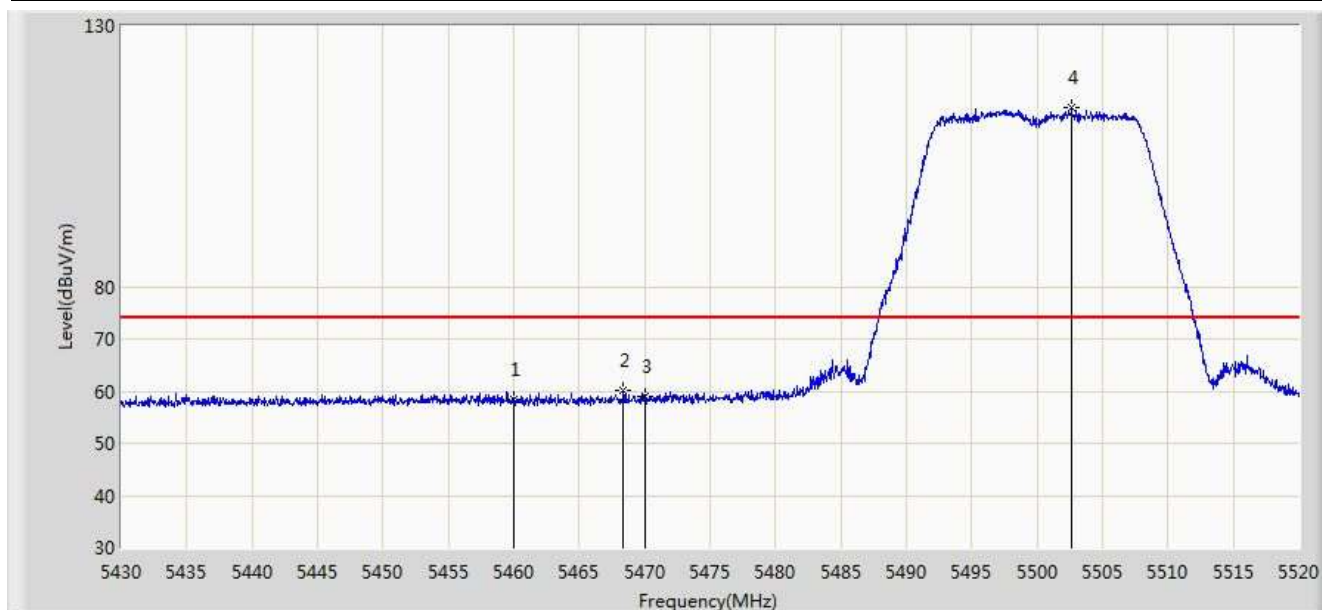


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	58.406	54.226	-15.594	74.000	4.180	PK
2			5468.385	60.222	56.023	-13.778	74.000	4.198	PK
3			5470.000	59.092	54.890	-14.908	74.000	4.202	PK
4			5502.630	114.372	110.092	N/A	N/A	4.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

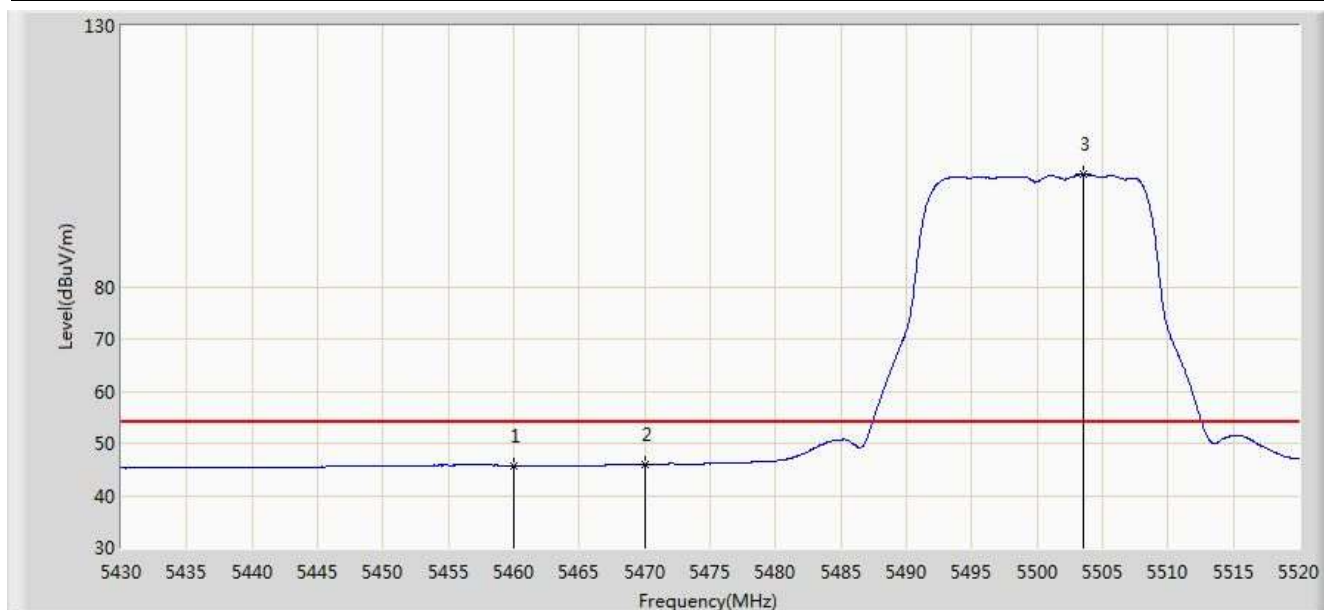


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.692	41.512	-8.308	54.000	4.180	AV
2			5470.000	45.945	41.743	-8.055	54.000	4.202	AV
3			5503.530	101.561	97.279	N/A	N/A	4.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

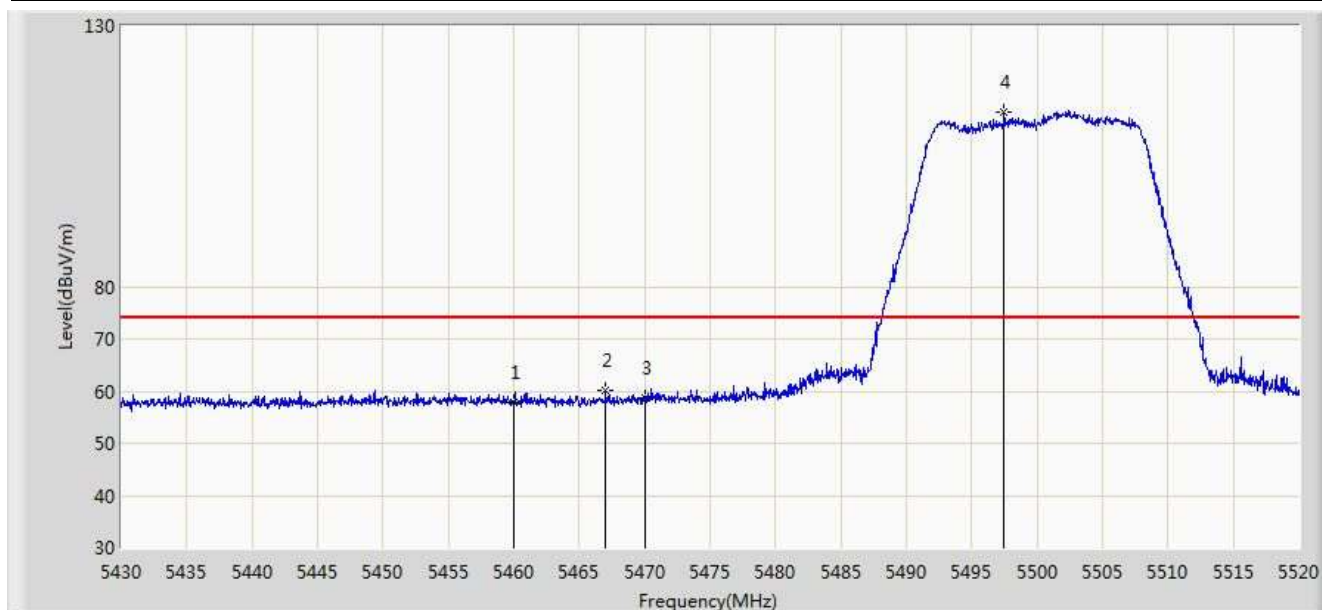


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	57.702	53.522	-16.298	74.000	4.180	PK
2			5467.035	60.025	55.829	-13.975	74.000	4.196	PK
3			5470.000	58.810	54.608	-15.190	74.000	4.202	PK
4			5497.455	113.518	109.253	N/A	N/A	4.264	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 02:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

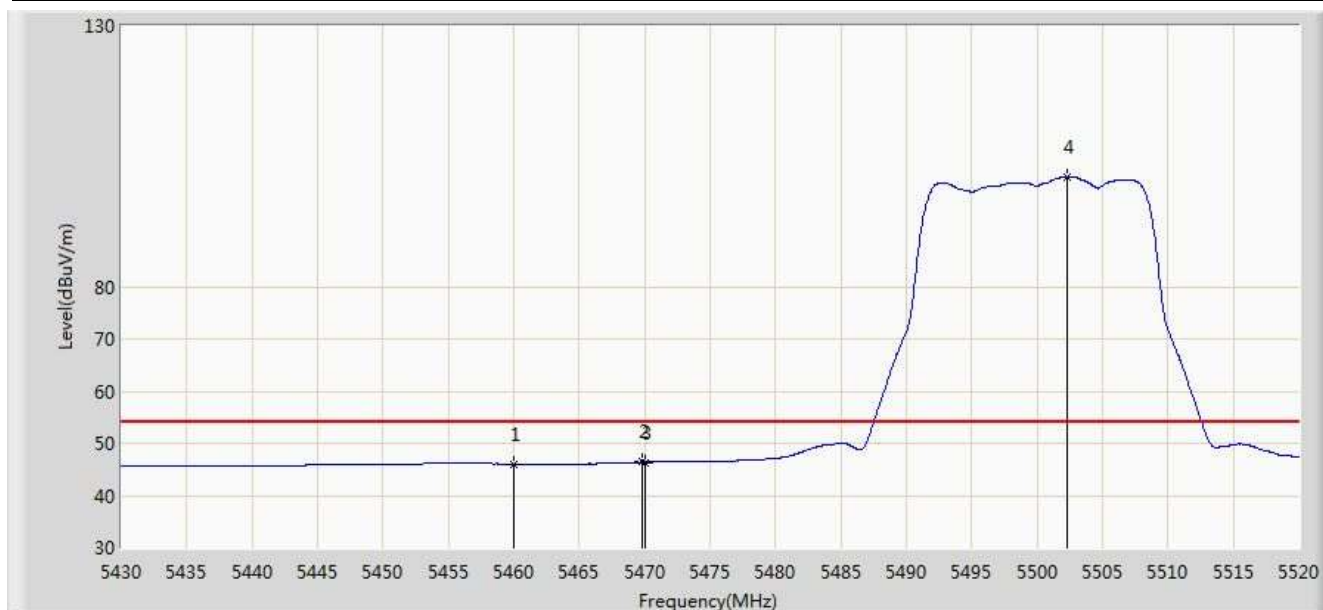


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.993	41.813	-8.007	54.000	4.180	AV
2			5469.780	46.388	42.186	-7.612	54.000	4.202	AV
3			5470.000	46.364	42.162	-7.636	54.000	4.202	AV
4			5502.270	101.062	96.783	N/A	N/A	4.278	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

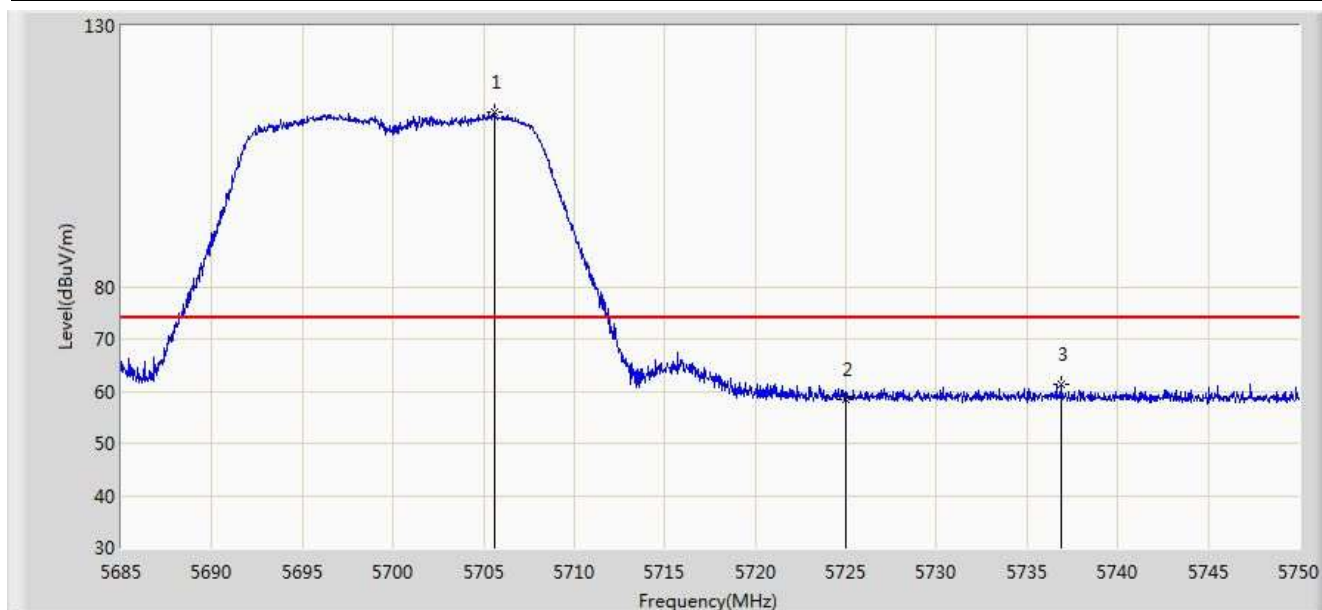


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5705.638	113.382	108.474	N/A	N/A	4.909	PK
2			5725.000	58.485	53.456	-15.515	74.000	5.029	PK
3			5736.902	61.213	56.108	-12.787	74.000	5.105	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

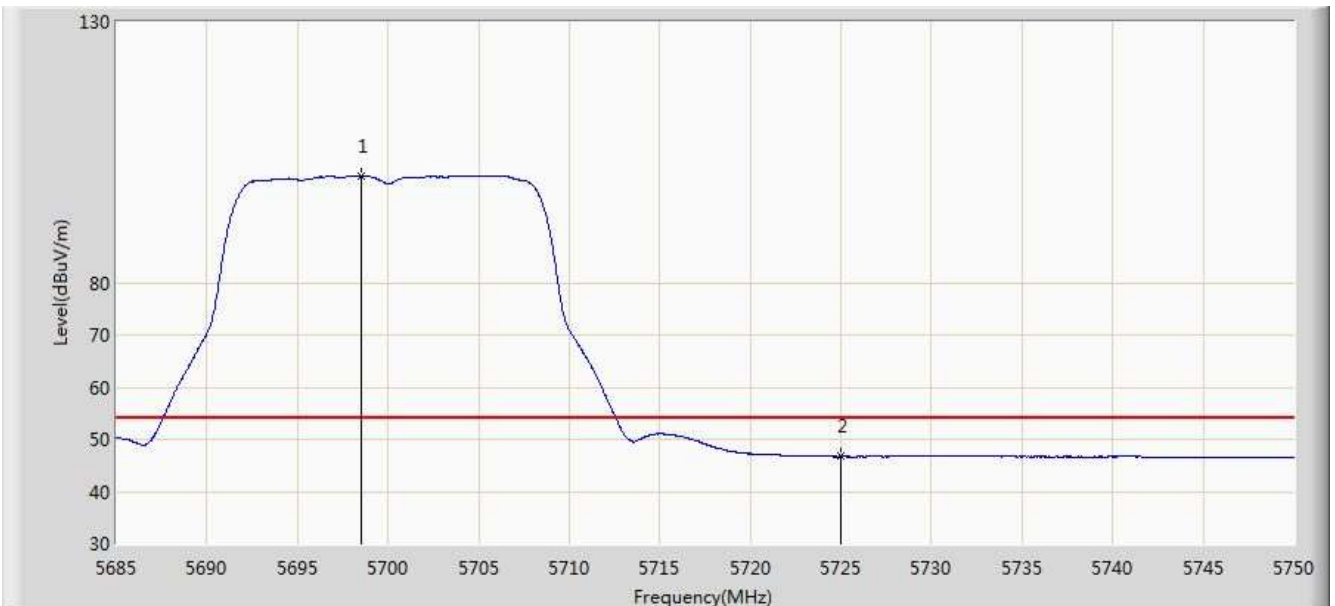


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5698.488	100.537	95.667	N/A	N/A	4.871	AV
2			5725.000	46.689	41.660	-7.311	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

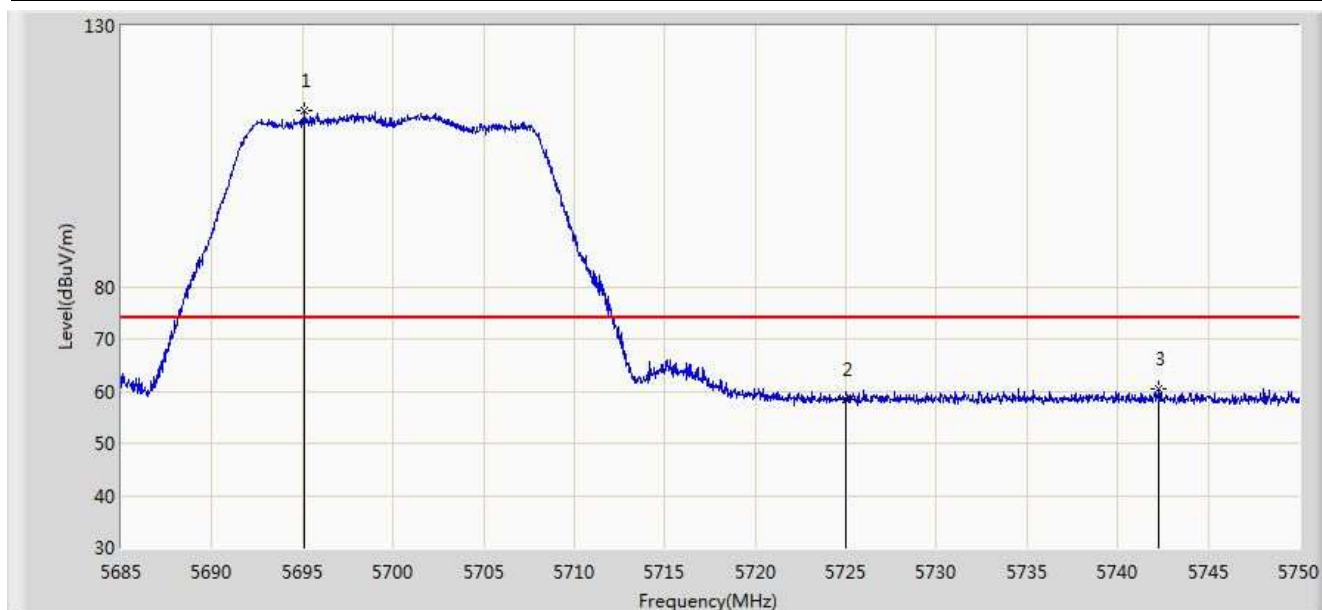


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5695.140	113.814	108.962	N/A	N/A	4.853	PK
2			5725.000	58.459	53.430	-15.541	74.000	5.029	PK
3			5742.297	60.413	55.274	-13.587	74.000	5.139	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

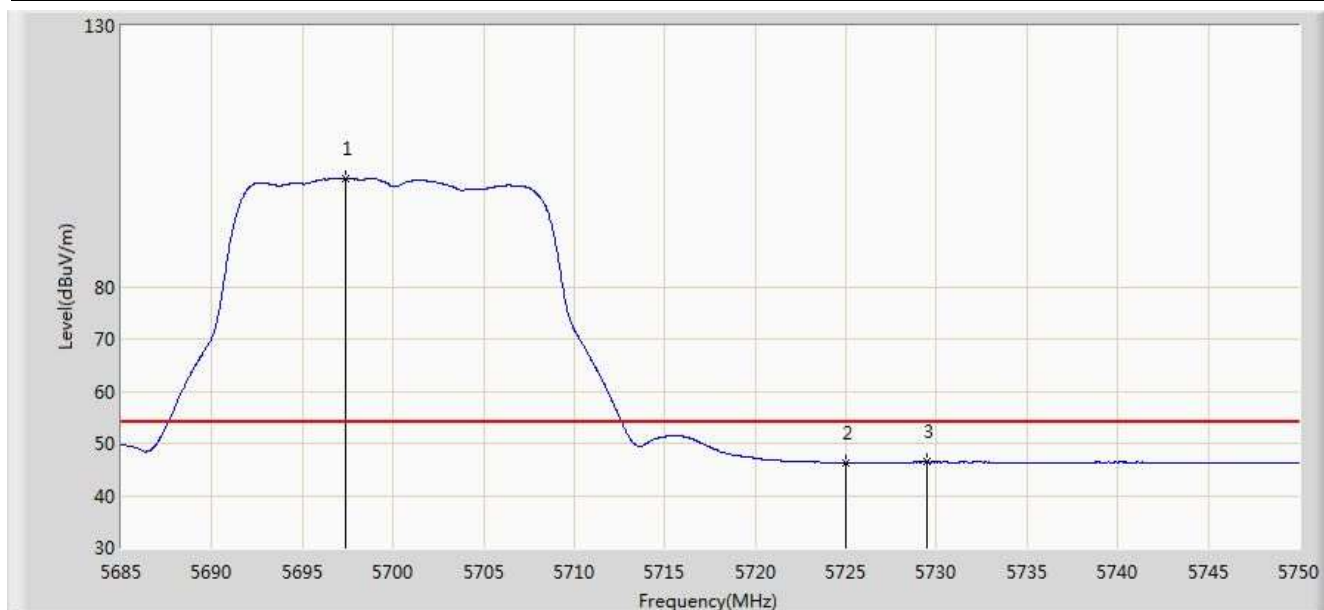


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5697.382	100.854	95.990	N/A	N/A	4.865	AV
2			5725.000	46.311	41.282	-7.689	54.000	5.029	AV
3			5729.493	46.398	41.340	-7.602	54.000	5.058	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

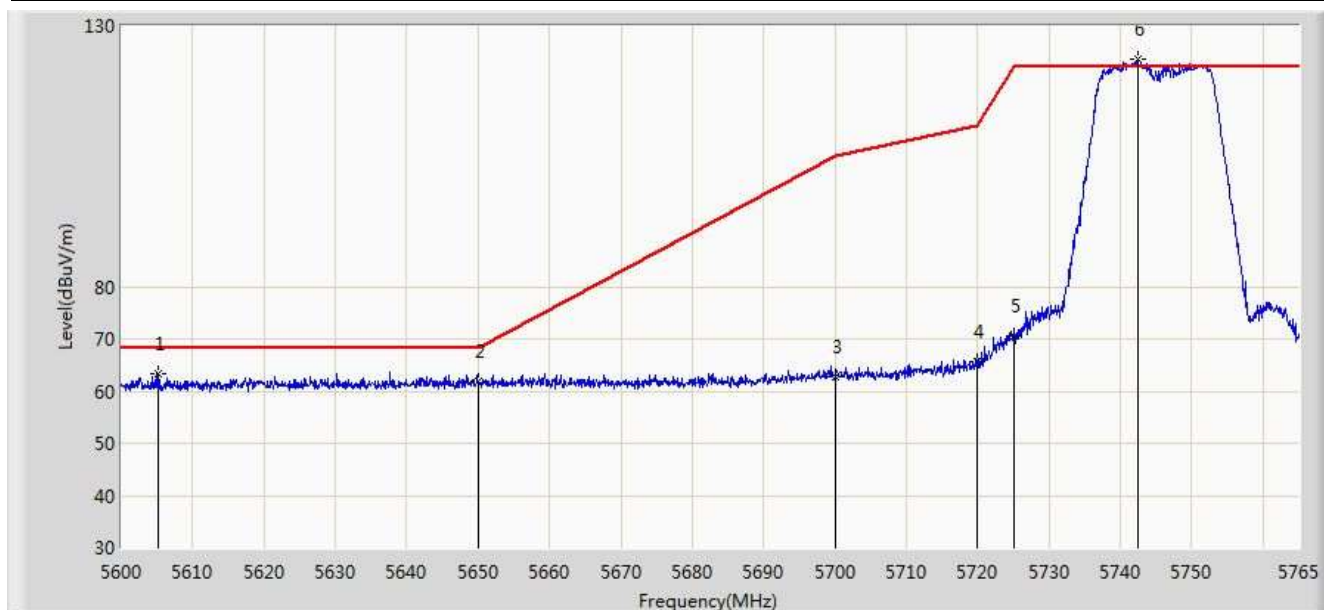


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5605.197	63.386	58.847	-4.814	68.200	4.539	PK
2			5650.000	61.827	57.156	-6.373	68.200	4.671	PK
3			5700.000	62.673	57.795	-42.527	105.200	4.878	PK
4			5720.000	65.758	60.761	-45.042	110.800	4.997	PK
5			5725.000	70.437	65.408	-51.763	122.200	5.029	PK
6			5742.395	123.625	118.485	N/A	N/A	5.140	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

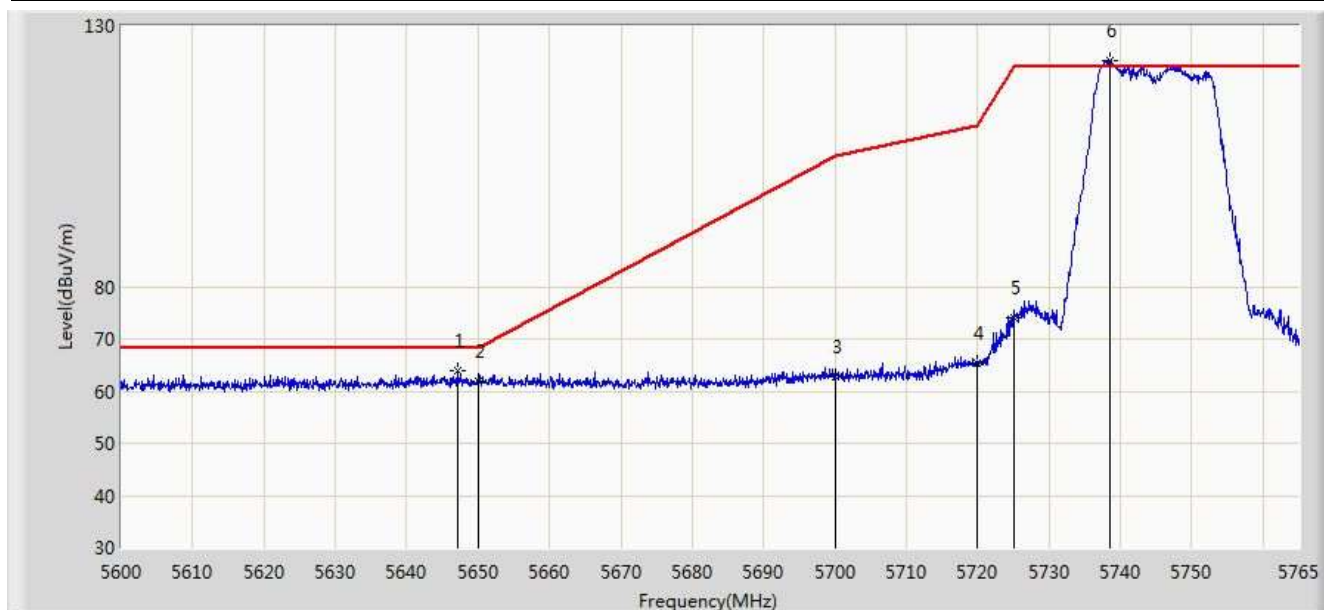


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5647.190	63.776	59.114	-4.424	68.200	4.662	PK
2			5650.000	61.955	57.284	-6.245	68.200	4.671	PK
3			5700.000	62.858	57.980	-42.342	105.200	4.878	PK
4			5720.000	65.364	60.367	-45.436	110.800	4.997	PK
5			5725.000	73.981	68.952	-48.219	122.200	5.029	PK
6			5738.435	123.478	118.363	N/A	N/A	5.115	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

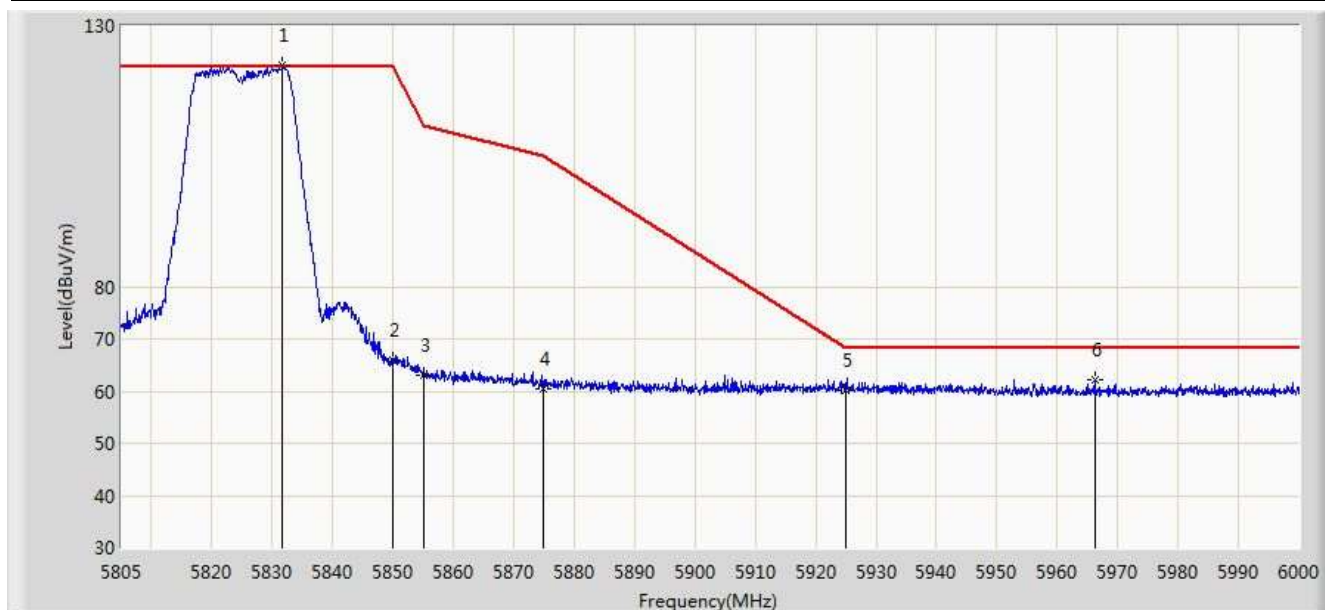


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5831.618	122.567	116.940	N/A	N/A	5.627	PK
2			5850.000	65.882	60.156	-56.318	122.200	5.726	PK
3			5855.000	63.152	57.406	-47.648	110.800	5.746	PK
4			5875.000	60.539	54.719	-44.661	105.200	5.820	PK
5			5925.000	60.168	54.202	-8.032	68.200	5.967	PK
6			5966.167	62.236	56.182	-5.964	68.200	6.054	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

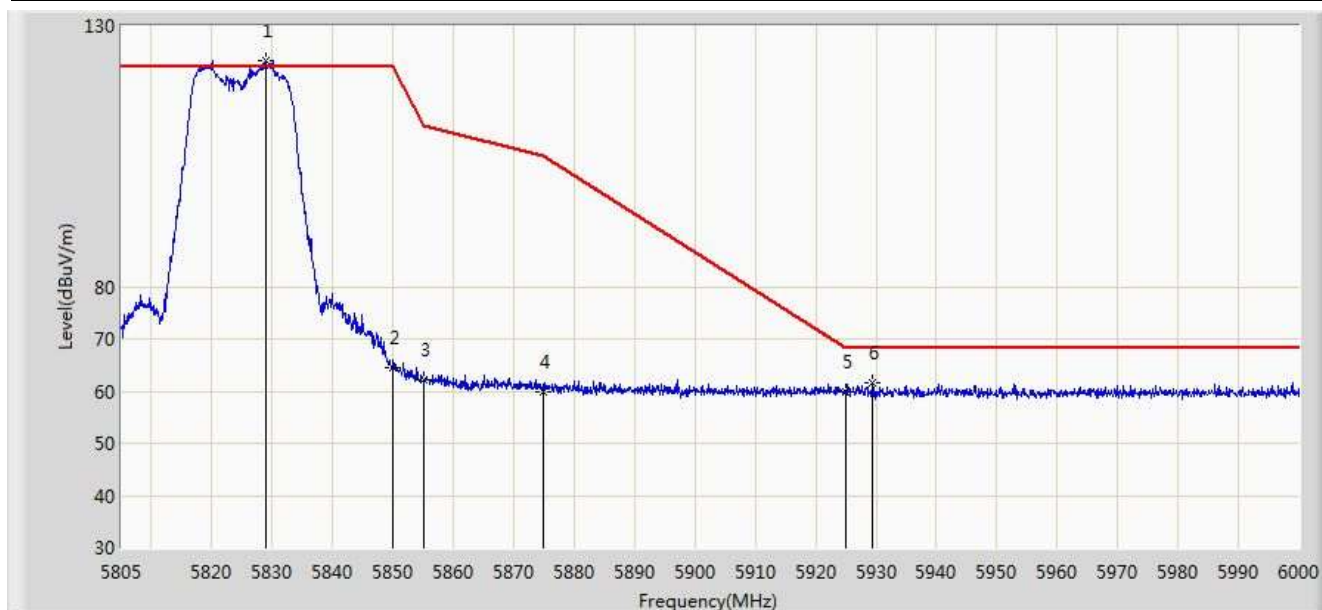


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5828.888	123.322	117.711	N/A	N/A	5.610	PK
2			5850.000	64.579	58.853	-57.621	122.200	5.726	PK
3			5855.000	62.286	56.540	-48.514	110.800	5.746	PK
4			5875.000	59.812	53.992	-45.388	105.200	5.820	PK
5			5925.000	59.891	53.925	-8.309	68.200	5.967	PK
6			5929.410	61.517	55.540	-6.683	68.200	5.978	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

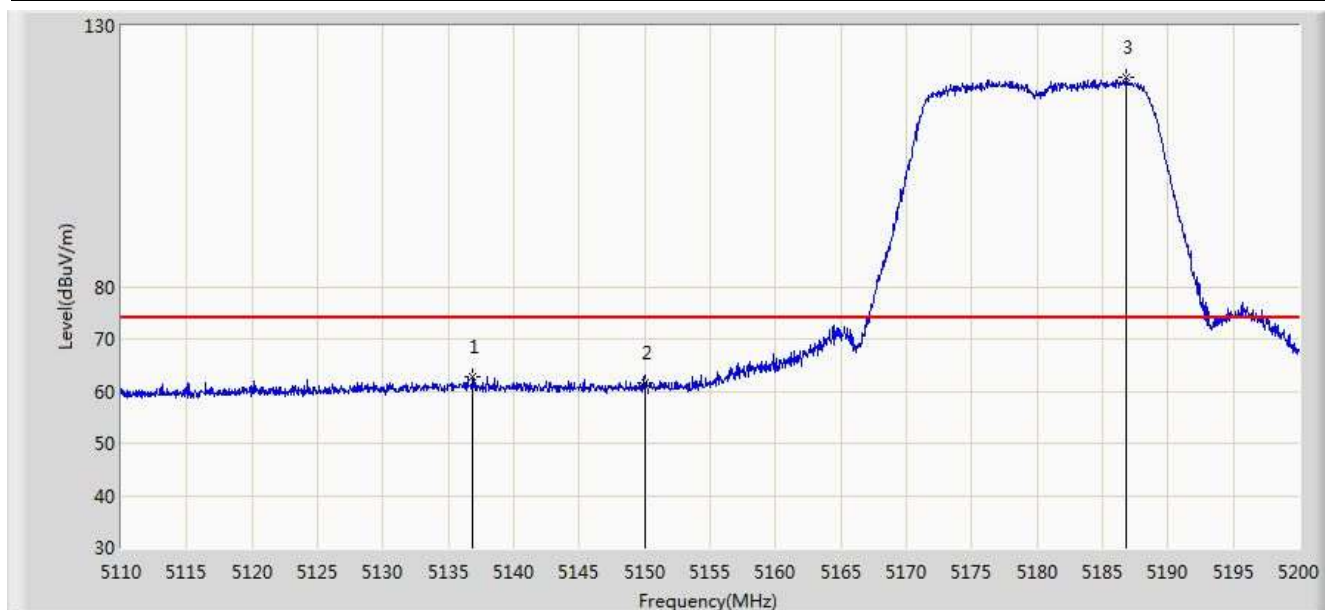

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.865	62.793	58.618	-11.207	74.000	4.176	PK
2			5150.000	61.636	57.467	-12.364	74.000	4.170	PK
3			5186.860	120.146	116.101	N/A	N/A	4.044	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.145	48.527	44.352	-5.473	54.000	4.175	AV
2			5150.000	48.472	44.303	-5.528	54.000	4.170	AV
3			5185.240	107.925	103.875	N/A	N/A	4.050	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

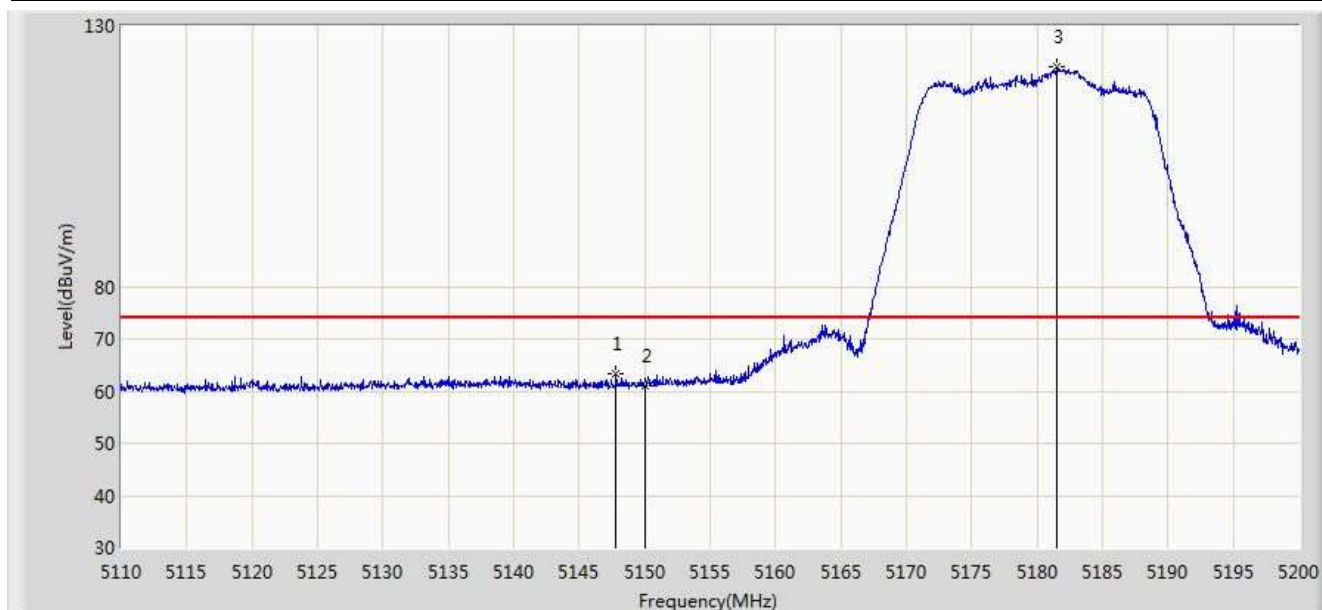

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.800	63.349	59.173	-10.651	74.000	4.176	PK
2			5150.000	60.923	56.754	-13.077	74.000	4.170	PK
3			5181.550	122.133	118.070	N/A	N/A	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.468	44.299	-5.532	54.000	4.170	AV
2			5182.090	108.803	104.742	N/A	N/A	4.061	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

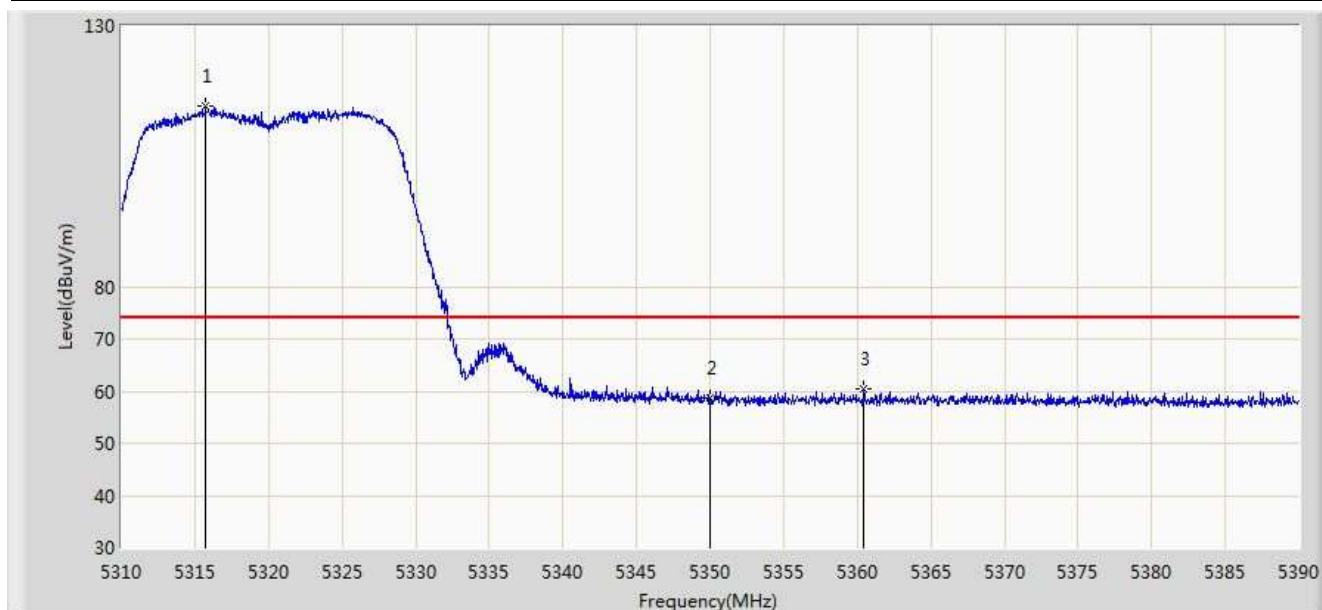


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5315.720	114.615	110.775	N/A	N/A	3.840	PK
2			5350.000	58.647	54.742	-15.353	74.000	3.904	PK
3			5360.440	60.318	56.394	-13.682	74.000	3.924	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

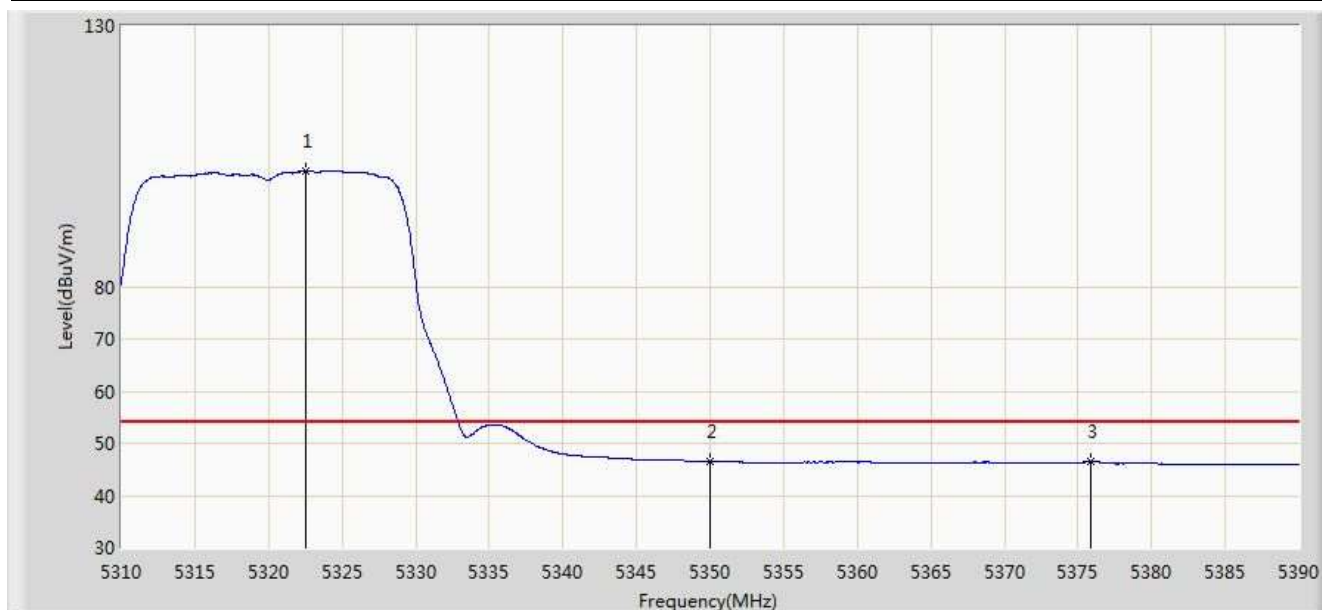


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5322.560	102.234	98.381	N/A	N/A	3.853	AV
2			5350.000	46.498	42.593	-7.502	54.000	3.904	AV
3			5375.840	46.521	42.569	-7.479	54.000	3.951	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

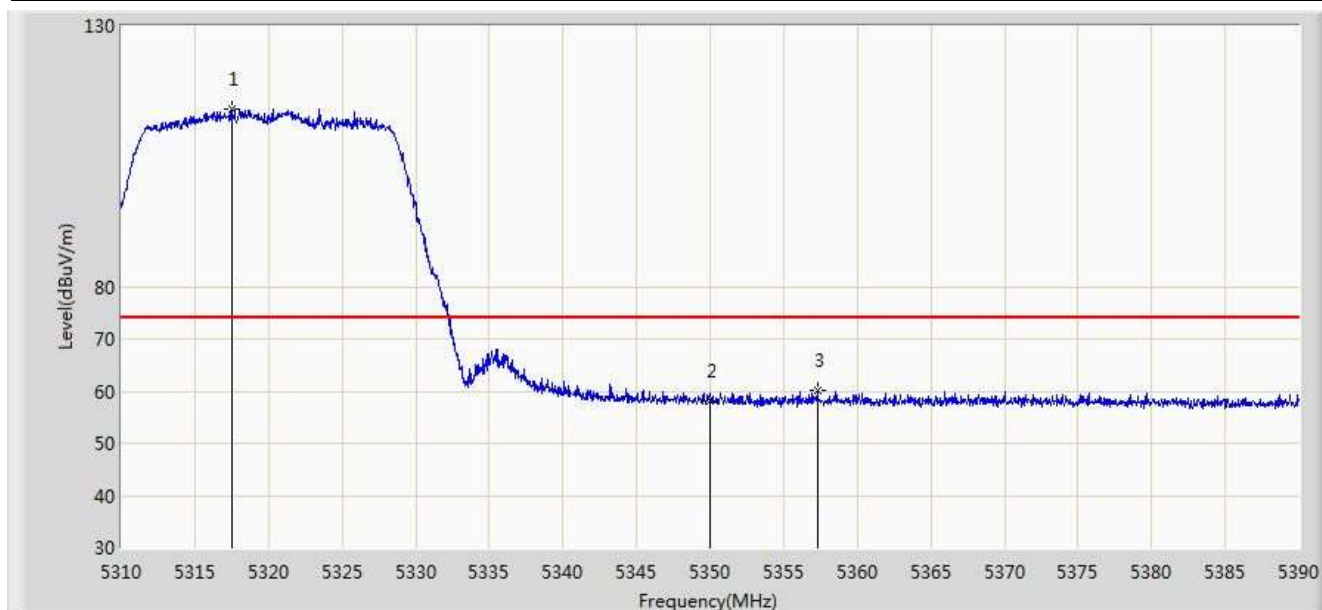


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5317.480	114.178	110.334	N/A	N/A	3.844	PK
2			5350.000	58.048	54.143	-15.952	74.000	3.904	PK
3			5357.280	60.184	56.266	-13.816	74.000	3.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

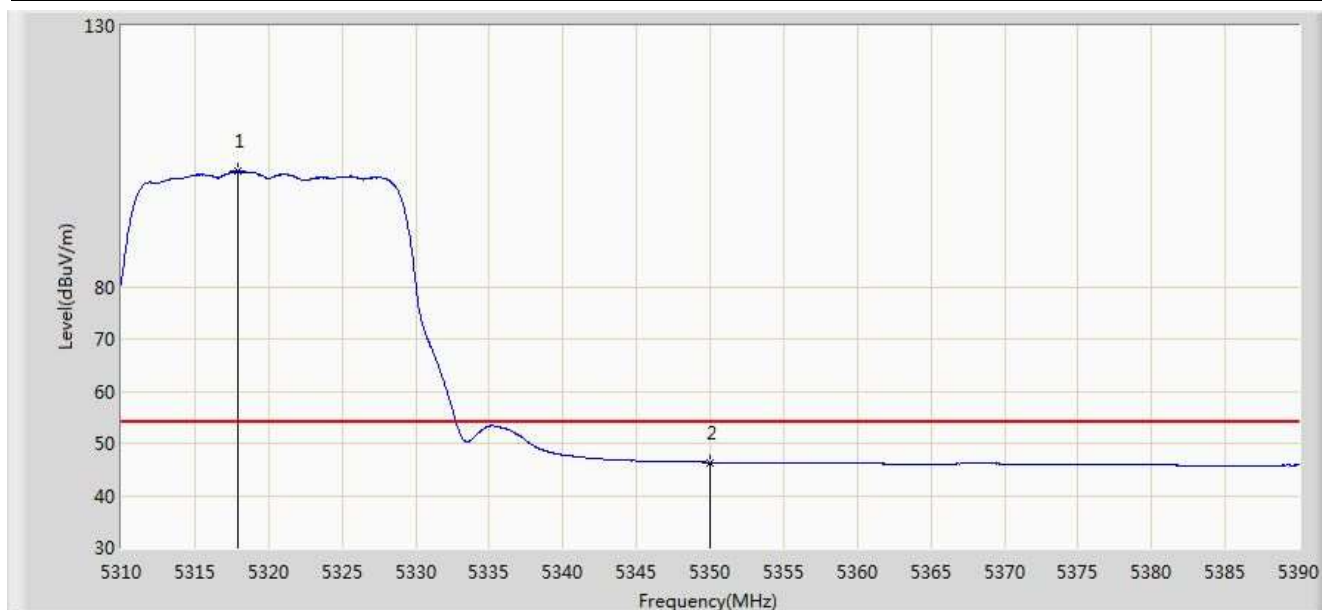


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5317.960	102.070	98.225	N/A	N/A	3.845	AV
2			5350.000	46.345	42.440	-7.655	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

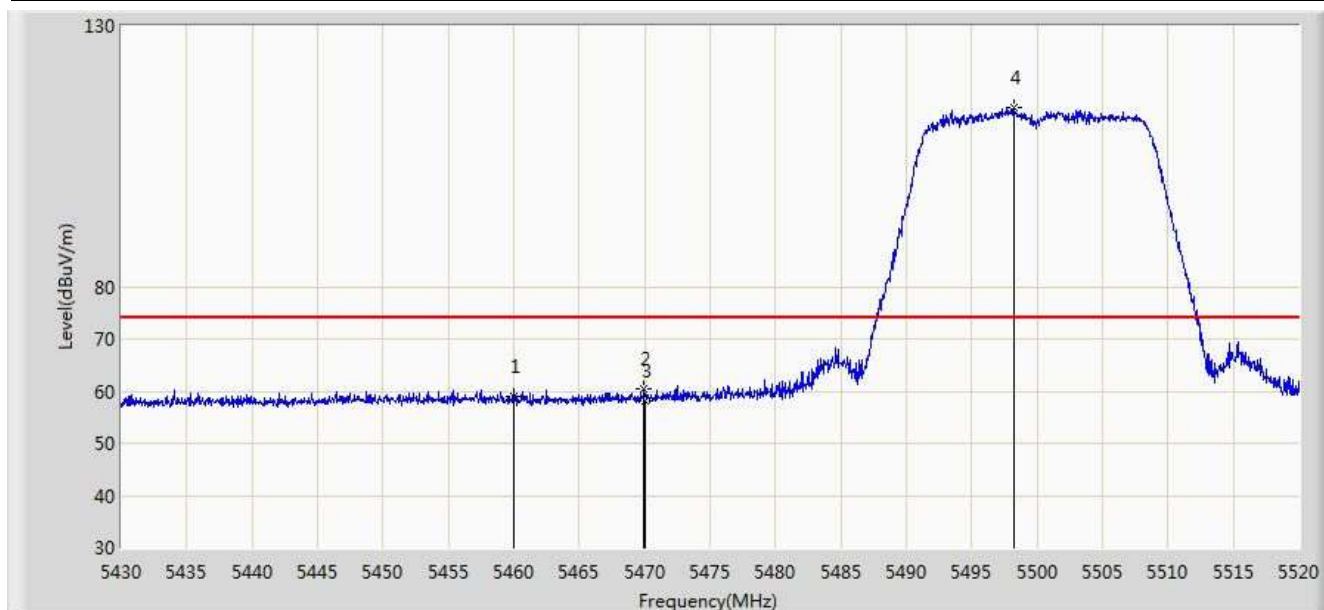


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	59.067	54.887	-14.933	74.000	4.180	PK
2			5469.915	60.389	56.187	-13.611	74.000	4.202	PK
3			5470.000	58.227	54.025	-15.773	74.000	4.202	PK
4			5498.220	114.230	109.963	N/A	N/A	4.267	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

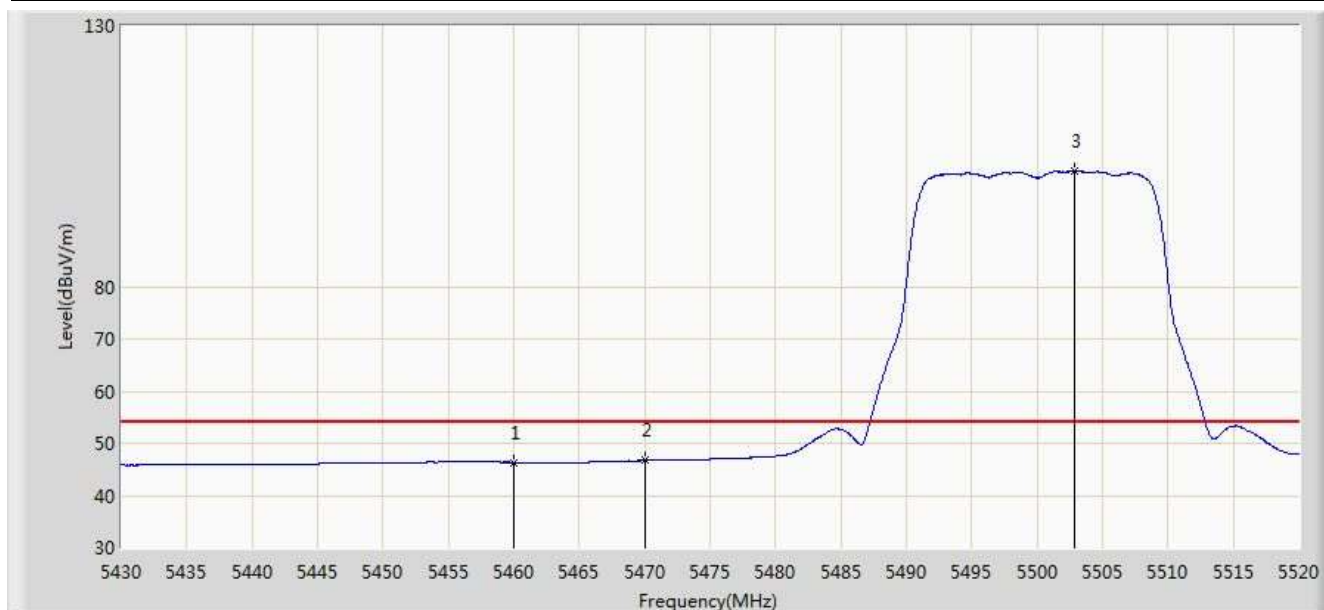


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.359	42.179	-7.641	54.000	4.180	AV
2			5470.000	46.689	42.487	-7.311	54.000	4.202	AV
3			5502.810	102.250	97.970	N/A	N/A	4.281	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

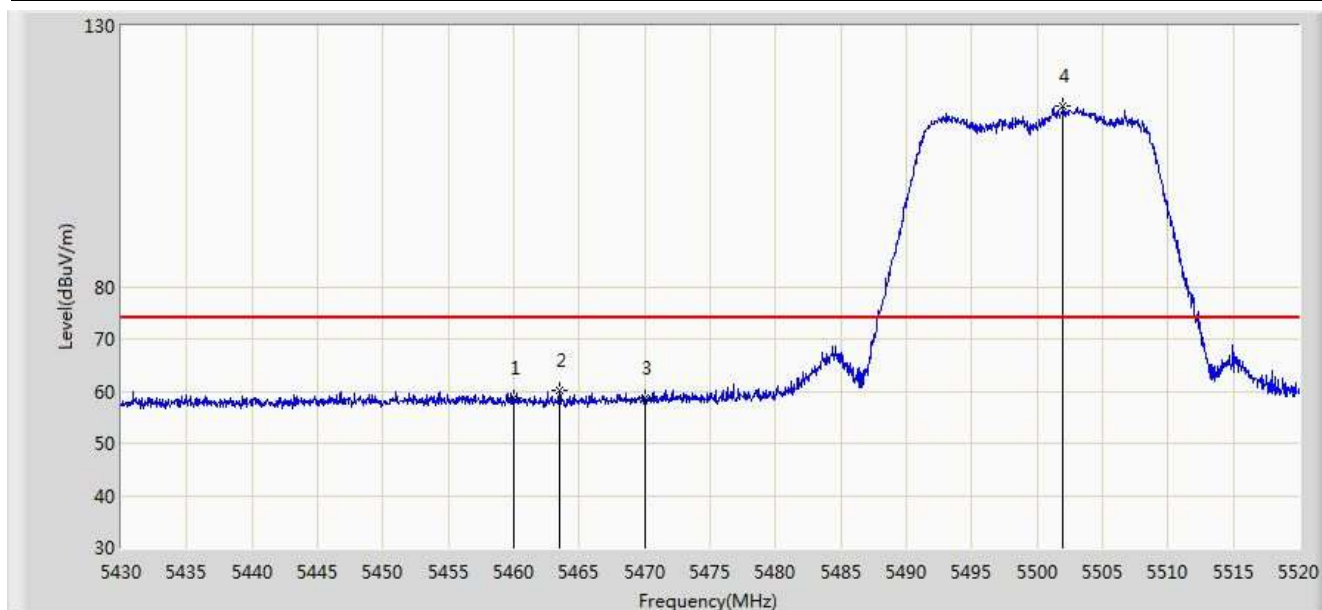


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	58.582	54.402	-15.418	74.000	4.180	PK
2			5463.480	60.184	55.996	-13.816	74.000	4.187	PK
3			5470.000	58.644	54.442	-15.356	74.000	4.202	PK
4			5501.955	114.721	110.443	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 03:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

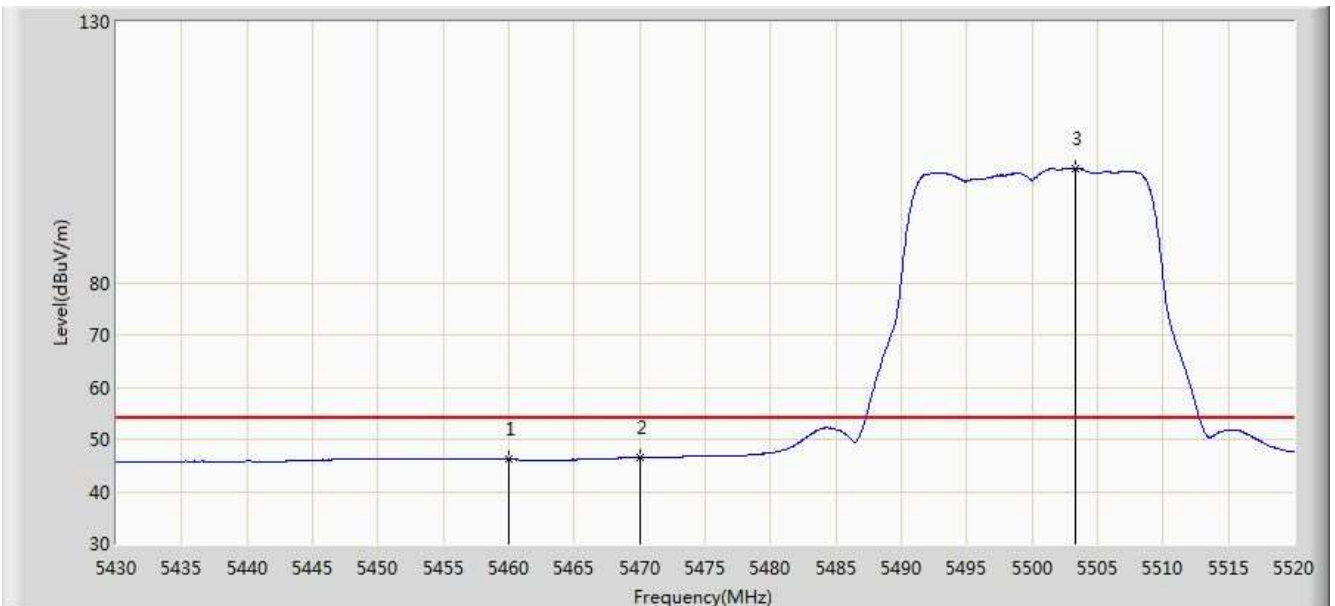


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.113	41.933	-7.887	54.000	4.180	AV
2			5470.000	46.501	42.299	-7.499	54.000	4.202	AV
3			5503.260	101.867	97.585	N/A	N/A	4.281	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

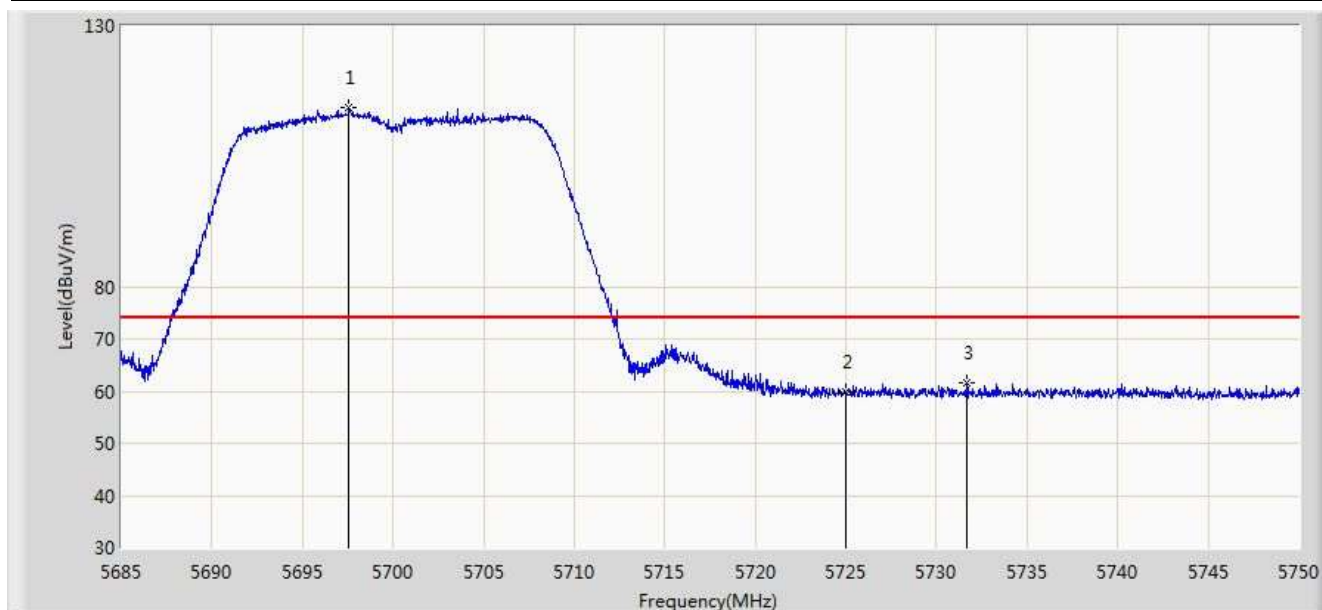


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5697.545	114.235	109.370	N/A	N/A	4.865	PK
2			5725.000	59.875	54.846	-14.125	74.000	5.029	PK
3			5731.703	61.460	56.388	-12.540	74.000	5.071	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

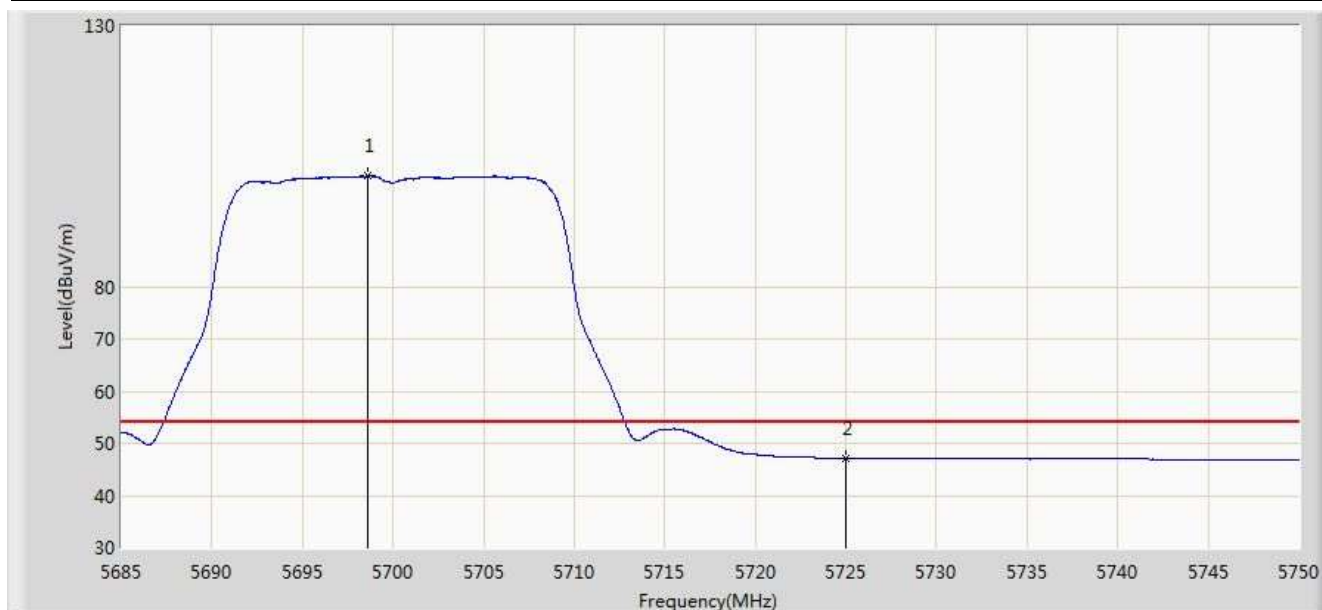


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5698.585	101.233	96.362	N/A	N/A	4.871	AV
2			5725.000	47.101	42.072	-6.899	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

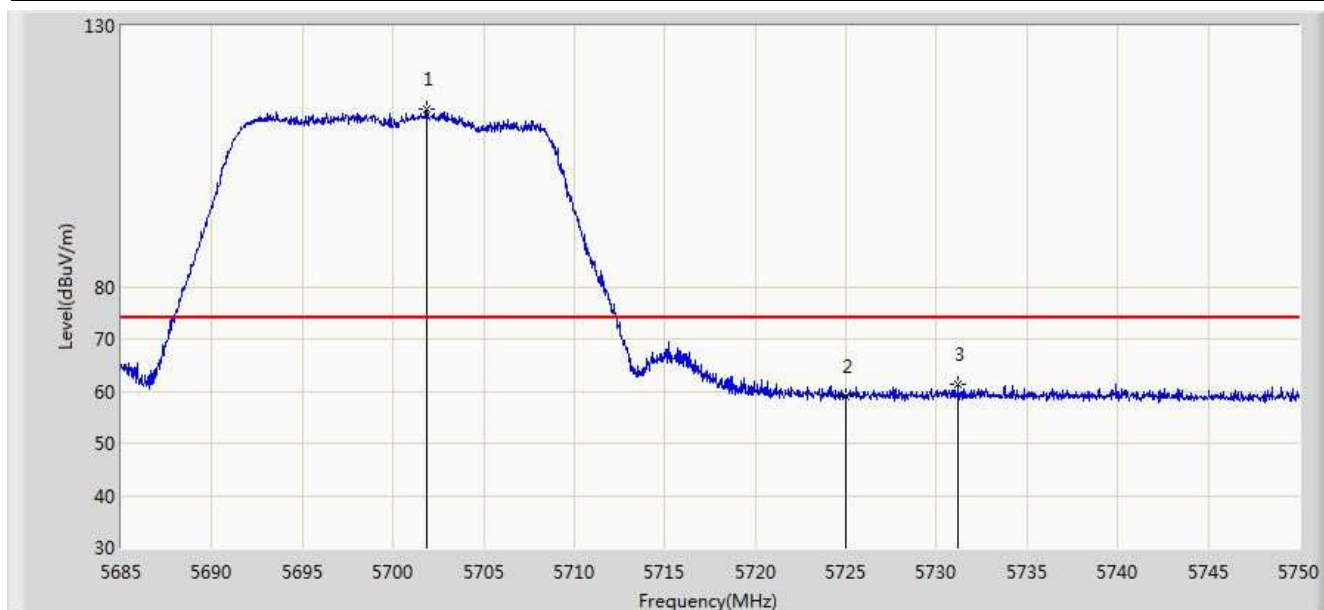


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5701.868	114.011	109.123	N/A	N/A	4.888	PK
2			5725.000	59.121	54.092	-14.879	74.000	5.029	PK
3			5731.215	61.226	56.157	-12.774	74.000	5.069	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

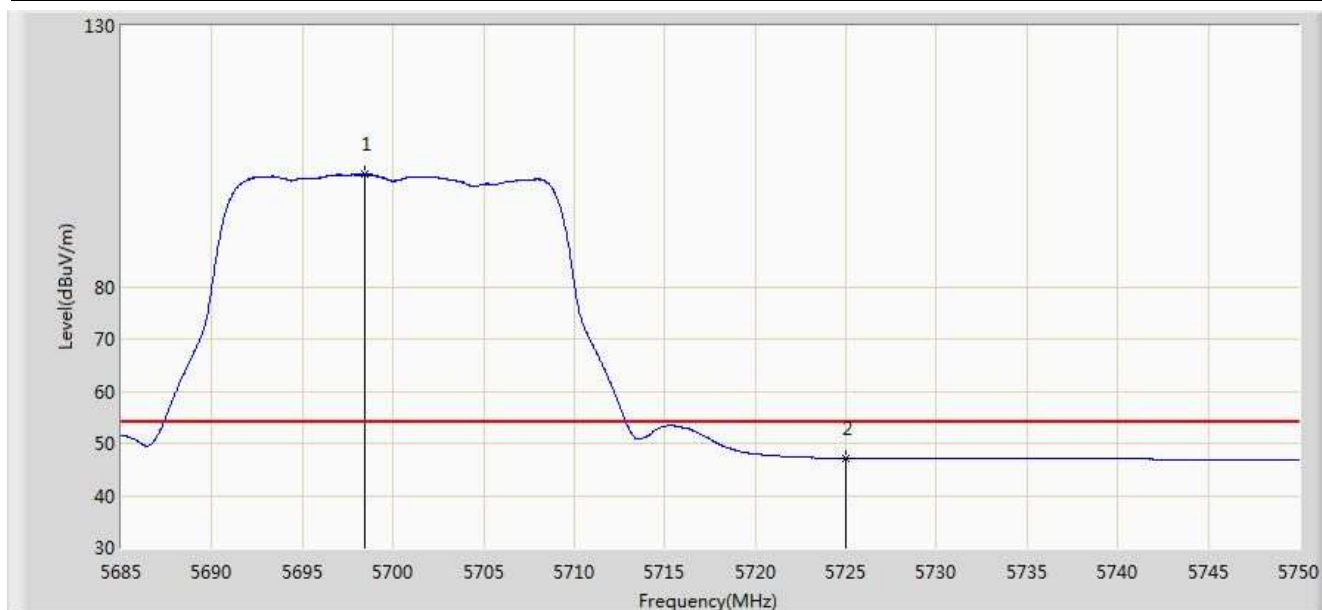


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5698.455	101.573	96.703	N/A	N/A	4.870	AV
2			5725.000	47.057	42.028	-6.943	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

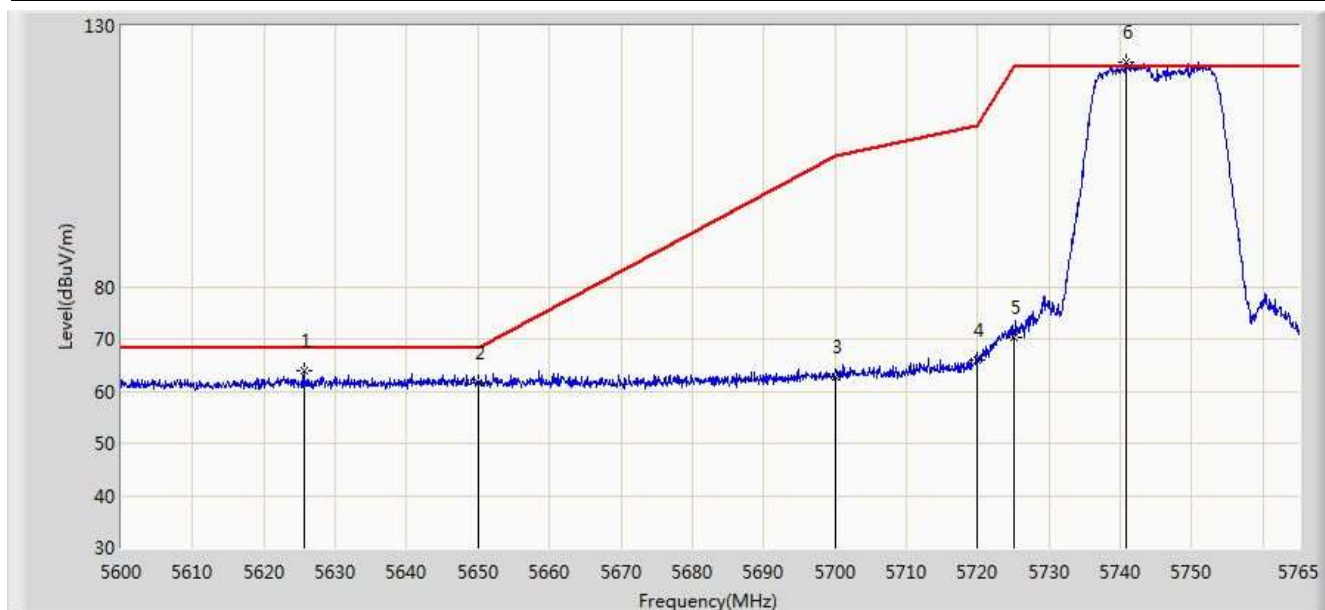


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5625.658	64.040	59.443	-4.160	68.200	4.597	PK
2			5650.000	61.727	57.056	-6.473	68.200	4.671	PK
3			5700.000	62.617	57.739	-42.583	105.200	4.878	PK
4			5720.000	65.826	60.829	-44.974	110.800	4.997	PK
5			5725.000	70.299	65.270	-51.901	122.200	5.029	PK
6			5740.745	123.051	117.922	N/A	N/A	5.130	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

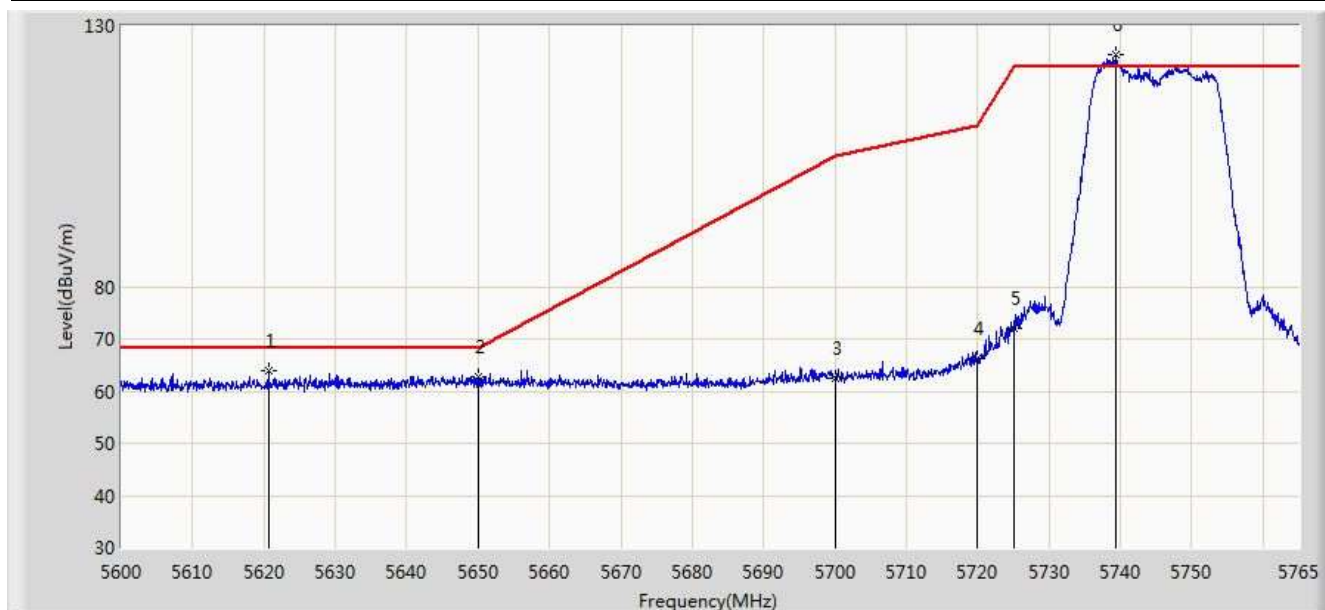


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5620.625	63.853	59.271	-4.347	68.200	4.583	PK
2			5650.000	62.692	58.021	-5.508	68.200	4.671	PK
3			5700.000	62.536	57.658	-42.664	105.200	4.878	PK
4			5720.000	66.174	61.177	-44.626	110.800	4.997	PK
5			5725.000	72.096	67.067	-50.104	122.200	5.029	PK
6			5739.425	124.392	119.271	N/A	N/A	5.122	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

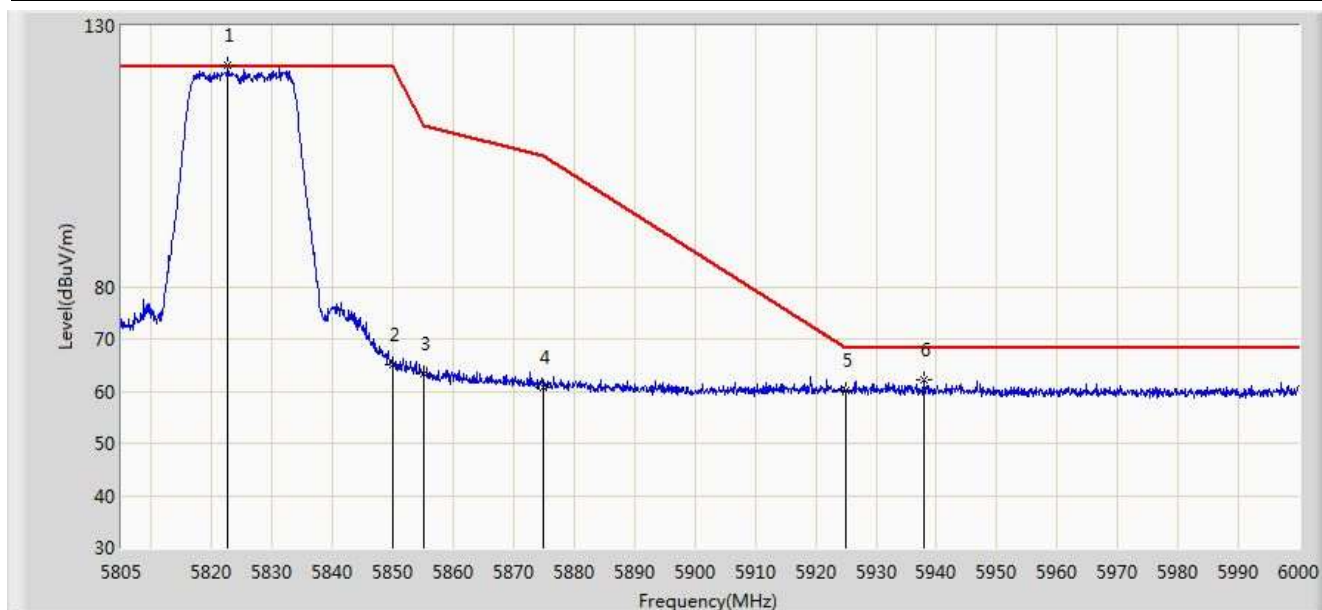


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5822.647	122.489	116.915	N/A	N/A	5.574	PK
2			5850.000	65.148	59.422	-57.052	122.200	5.726	PK
3			5855.000	63.293	57.547	-47.507	110.800	5.746	PK
4			5875.000	60.596	54.776	-44.604	105.200	5.820	PK
5			5925.000	60.123	54.157	-8.077	68.200	5.967	PK
6			5937.893	62.183	56.185	-6.017	68.200	5.998	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

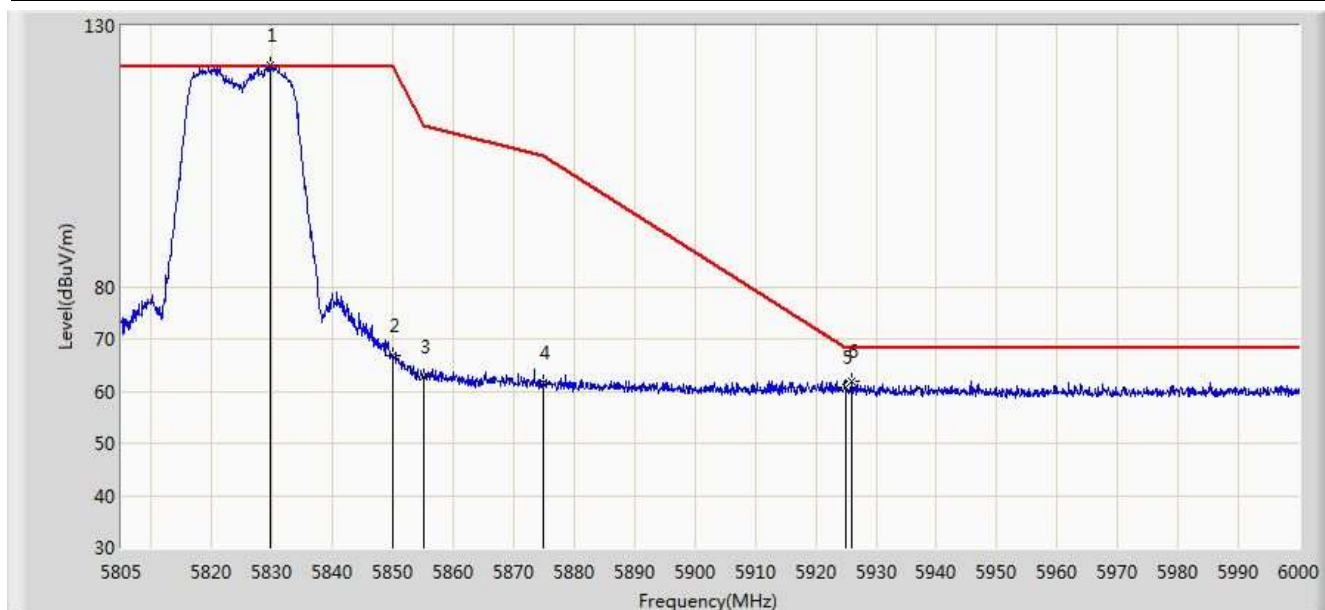


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5829.765	122.370	116.754	N/A	N/A	5.616	PK
2			5850.000	66.749	61.023	-55.451	122.200	5.726	PK
3			5855.000	62.845	57.099	-47.955	110.800	5.746	PK
4			5875.000	61.715	55.895	-43.485	105.200	5.820	PK
5			5925.000	60.611	54.645	-7.589	68.200	5.967	PK
6			5925.900	62.028	56.059	-6.172	68.200	5.968	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

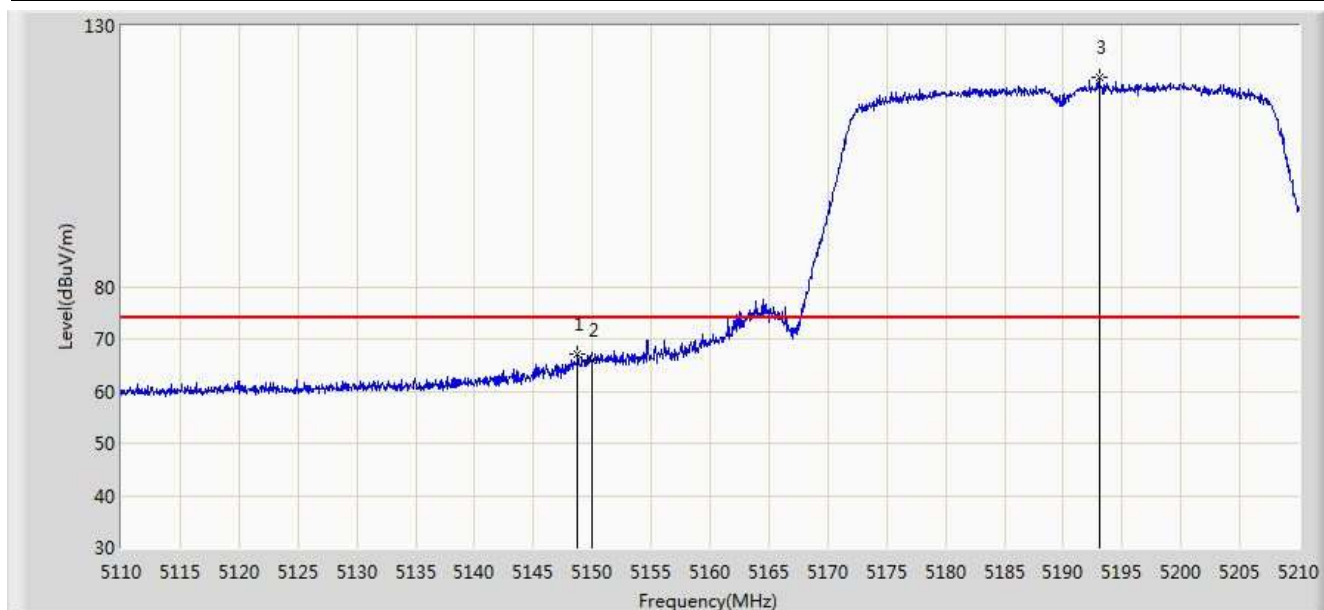


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.750	67.023	62.850	-6.977	74.000	4.174	PK
2			5150.000	66.069	61.900	-7.931	74.000	4.170	PK
3			5193.050	120.241	116.218	N/A	N/A	4.023	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

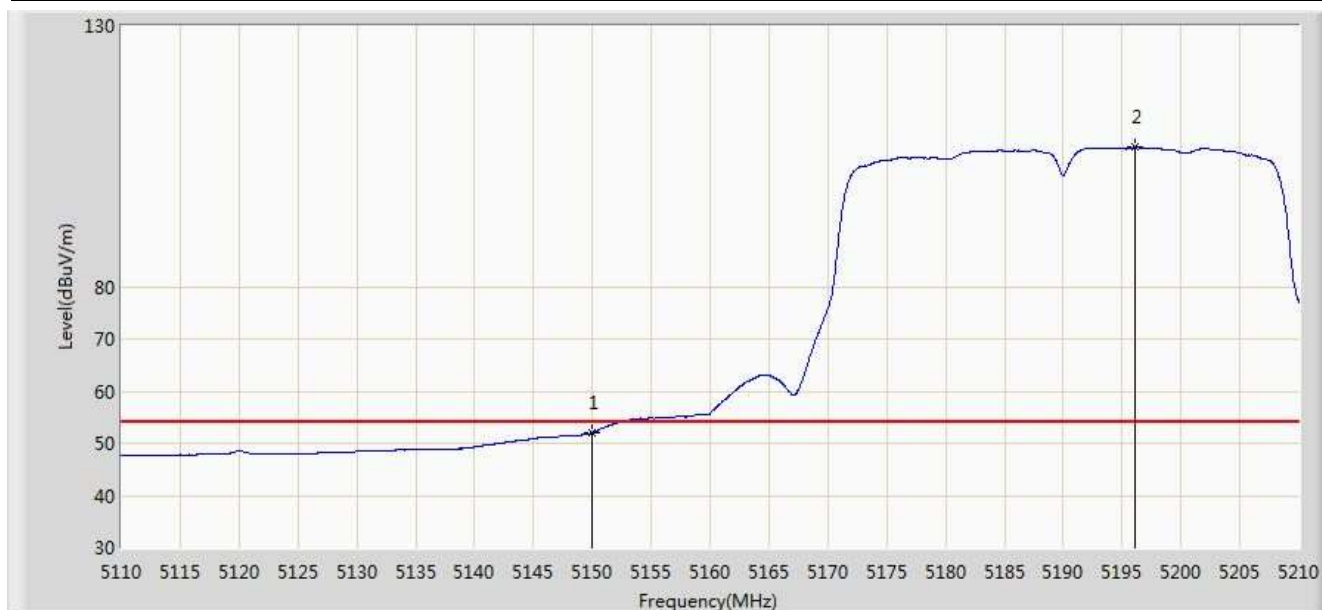


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.924	47.755	-2.076	54.000	4.170	AV
2			5196.050	106.693	102.681	N/A	N/A	4.012	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/18 - 04:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Directional Antenna (MT-484052/NVH)	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

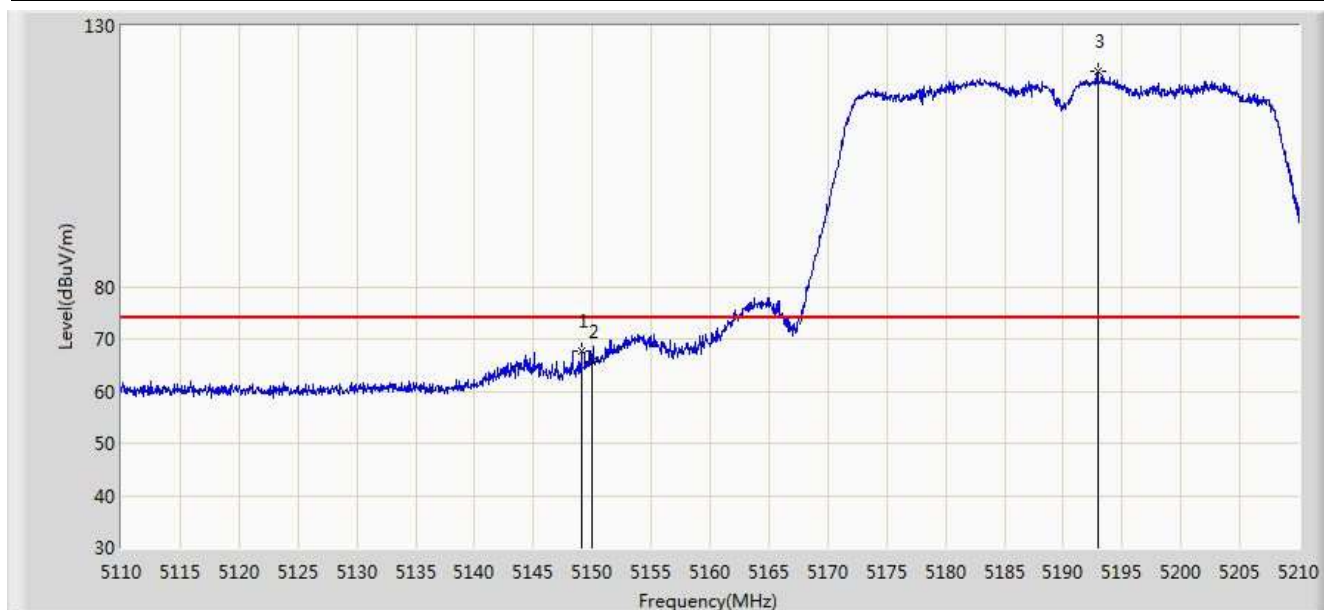

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.100	67.816	63.644	-6.184	74.000	4.173	PK
2			5150.000	65.739	61.570	-8.261	74.000	4.170	PK
3			5192.900	121.309	117.286	N/A	N/A	4.023	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)