



802.11ac-VHT20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3

Channel 100 (5500MHz)

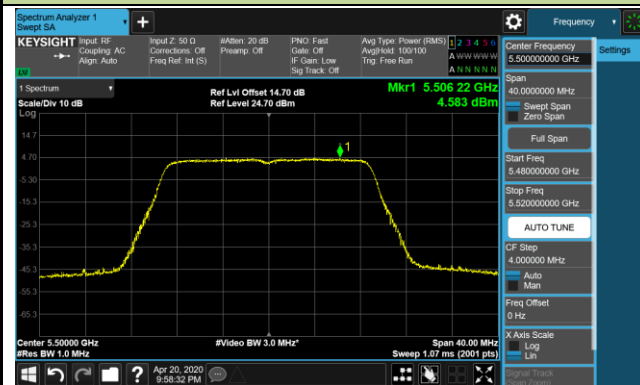


Channel 116 (5580MHz)

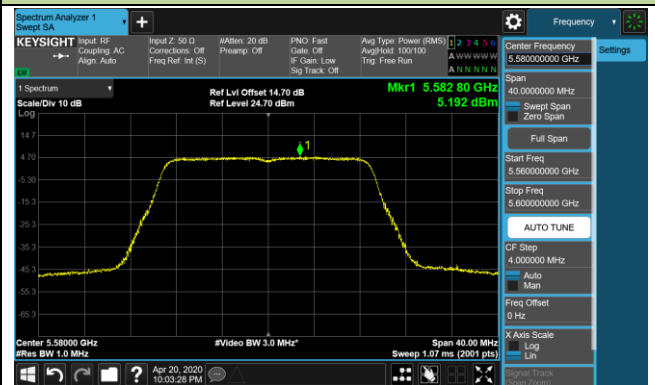

Channel 140 (5700MHz)



Channel 144 (5720MHz)

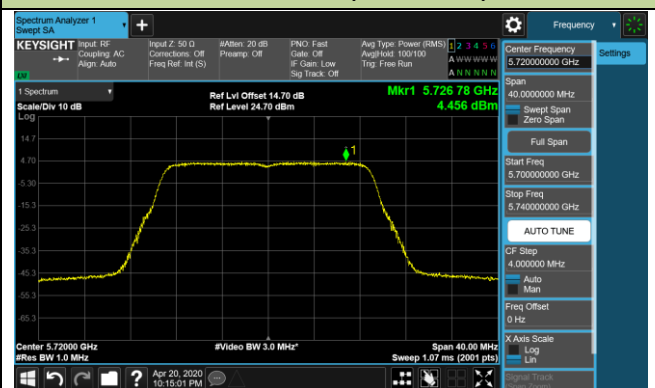


802.11ac-VHT40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 102 (5510MHz)




Channel 110 (5550MHz)

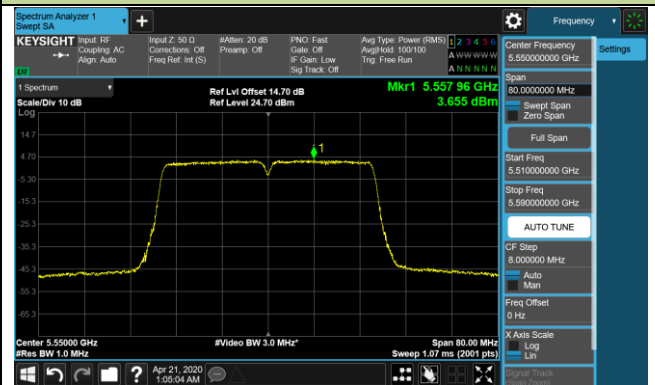

Channel 134 (5670MHz)

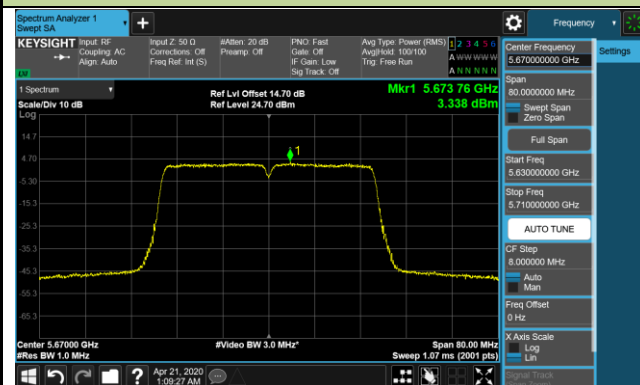


Channel 142 (5710MHz)

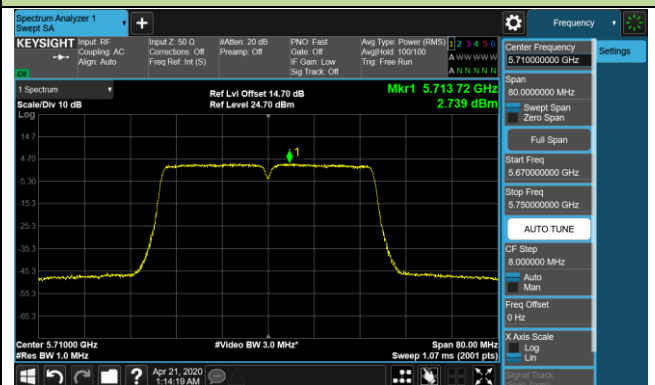


802.11ac-VHT80 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 106 (5530MHz)

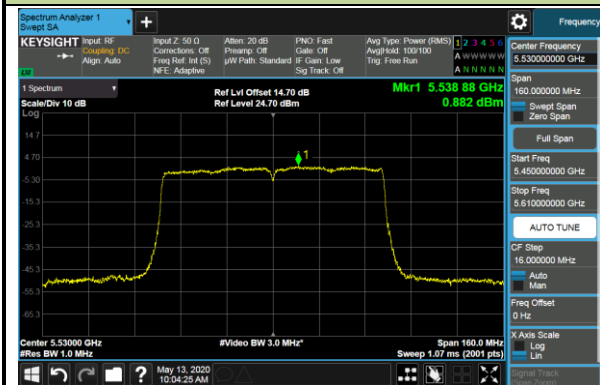

Channel 122 (5610MHz)

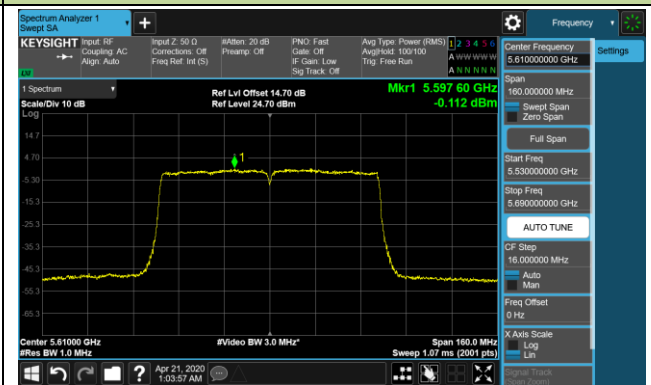


Channel 138 (5690MHz)

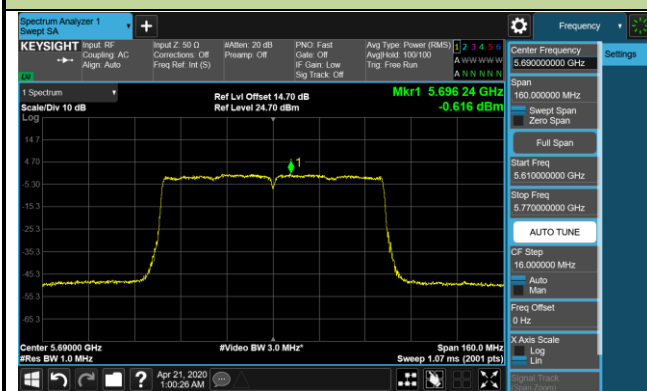


802.11ac-VHT160 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3

Channel 114 (5570MHz)

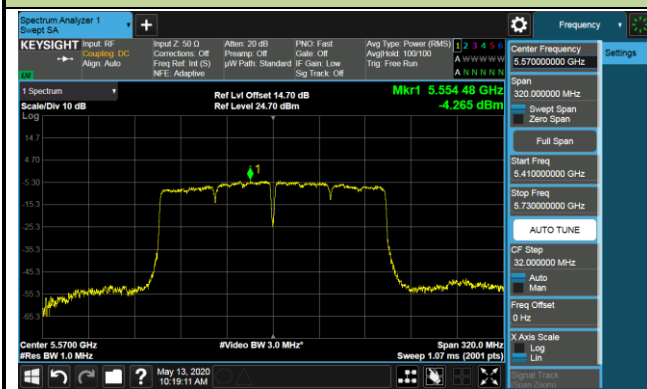


802.11ax-HE20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3

Channel 100 (5500MHz)

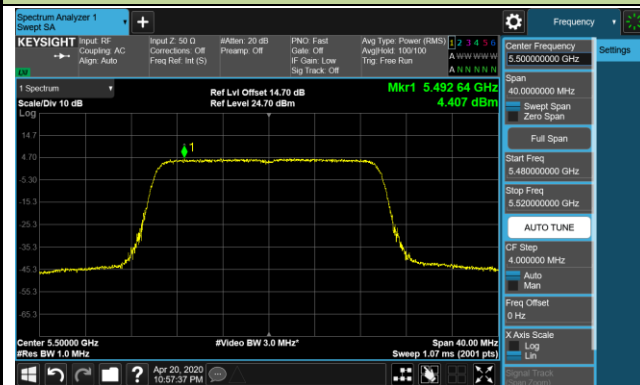


Channel 116 (5580MHz)

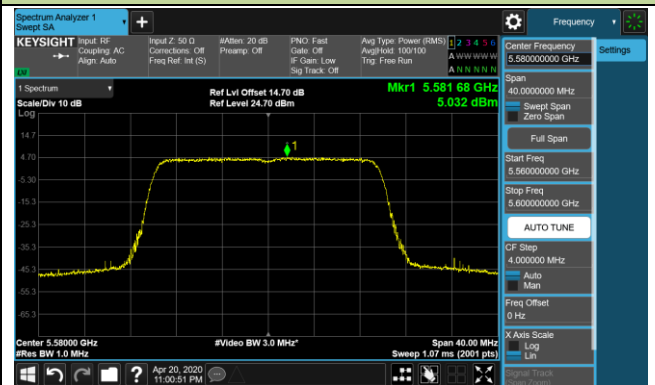

Channel 140 (5700MHz)



Channel 144 (5720MHz)

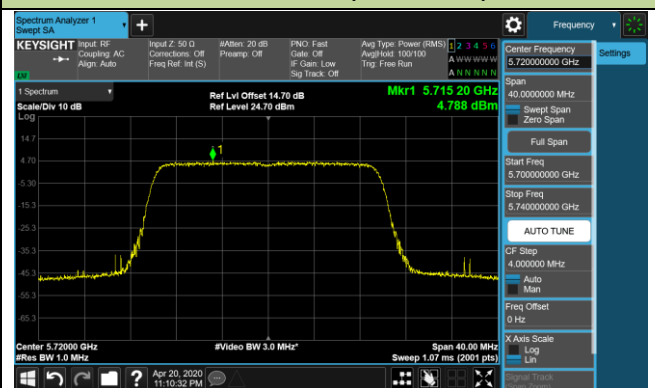


802.11ax-HE40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 102 (5510MHz)




Channel 110 (5550MHz)

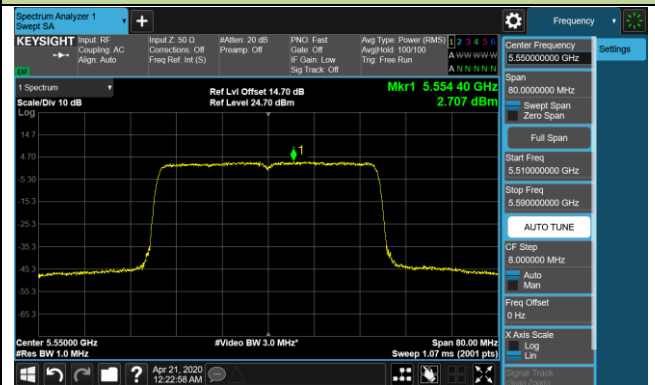

Channel 134 (5670MHz)

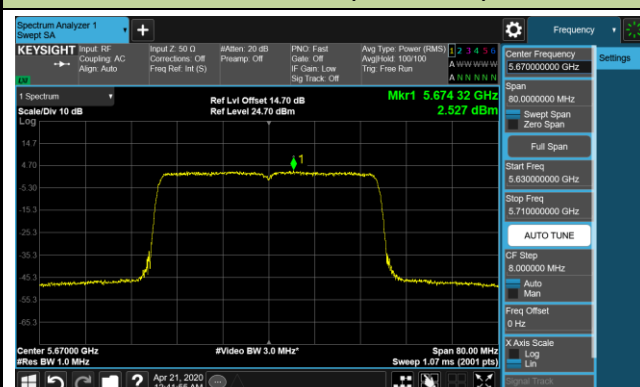


Channel 142 (5710MHz)

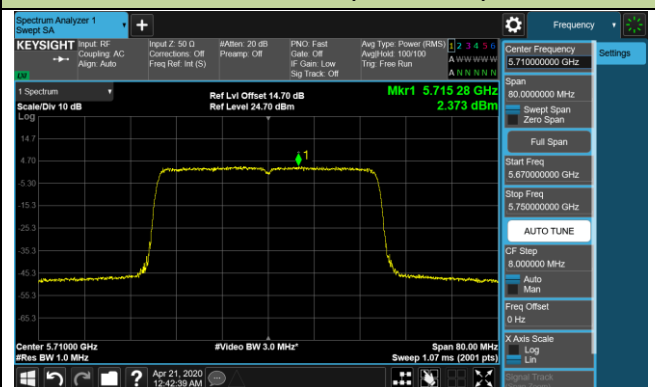


802.11ax-HE80 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 106 (5530MHz)

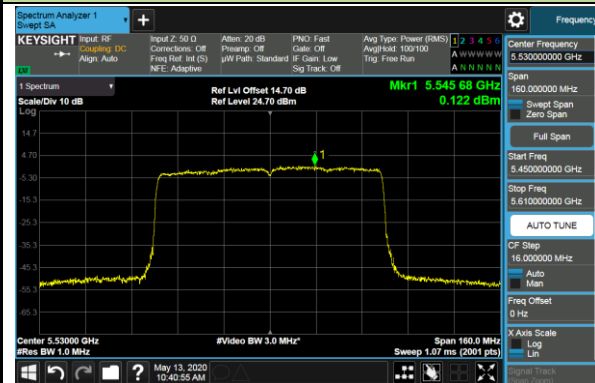

Channel 122 (5610MHz)

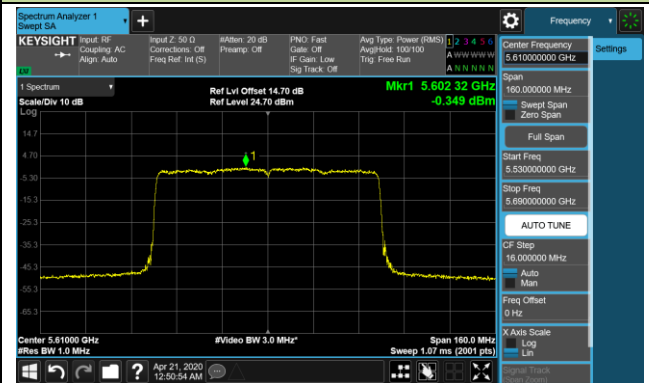

Channel 138 (5690MHz)

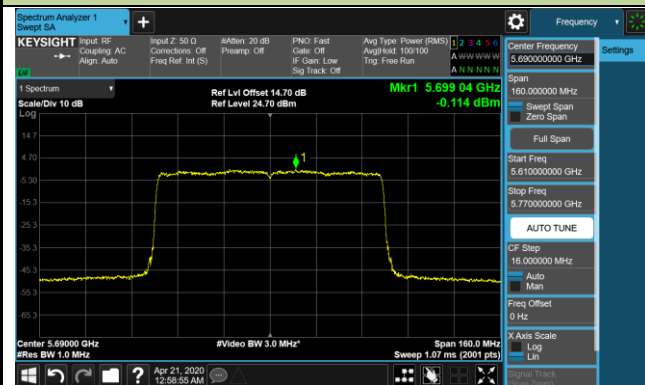

802.11ax-HE160 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3

Channel 114 (5570MHz)




5.7. 操作頻帶外的峰值發射

5.7.1. 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範之第 5.7.3 節：


- (1) 在 5.15 GHz~5.35 GHz 及 5.470 GHz~5.725 GHz 頻段操作的發射器：帶外發射之有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz。
- (2) 在 5.725 GHz~5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz~25 MHz，有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz~75 MHz，有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz~-27 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 $\geq$ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz；

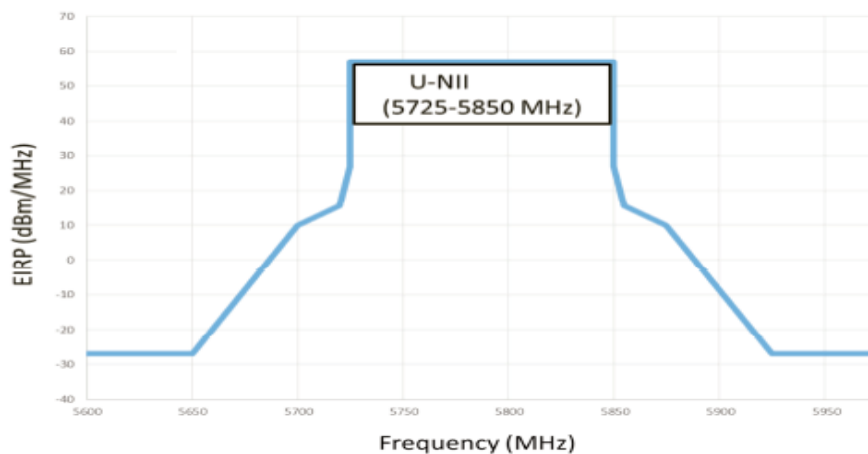

5.7.2. 量測方法


高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。

5.7.3. 測試架構圖

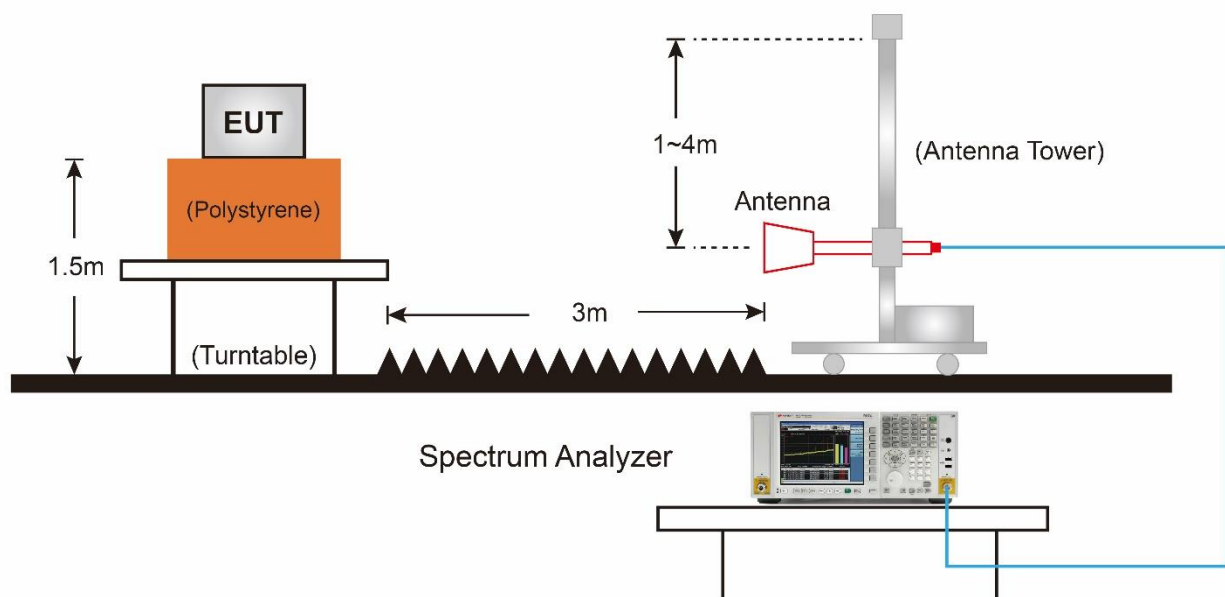

5.7.4. 操作頻帶外的峰值發射測試結果

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

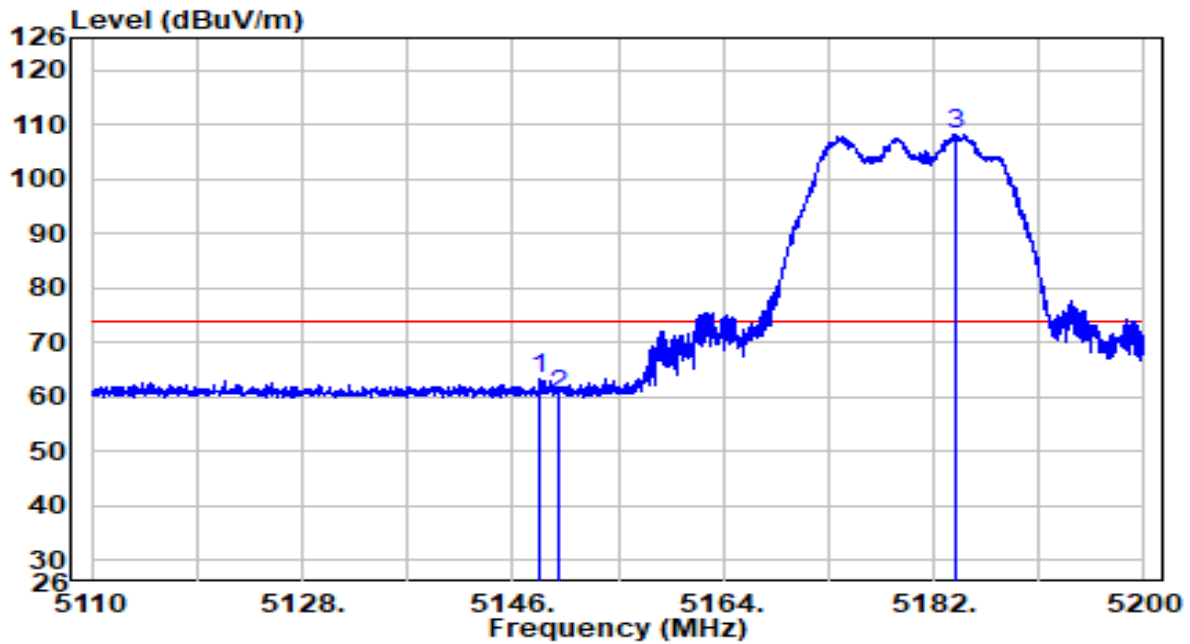


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.385	43.31	19.90	63.21	-10.79	74.00	Peak
2	5150.000	40.57	19.91	60.48	-13.52	74.00	Peak
3	* 5183.890	88.43	19.94	108.38	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

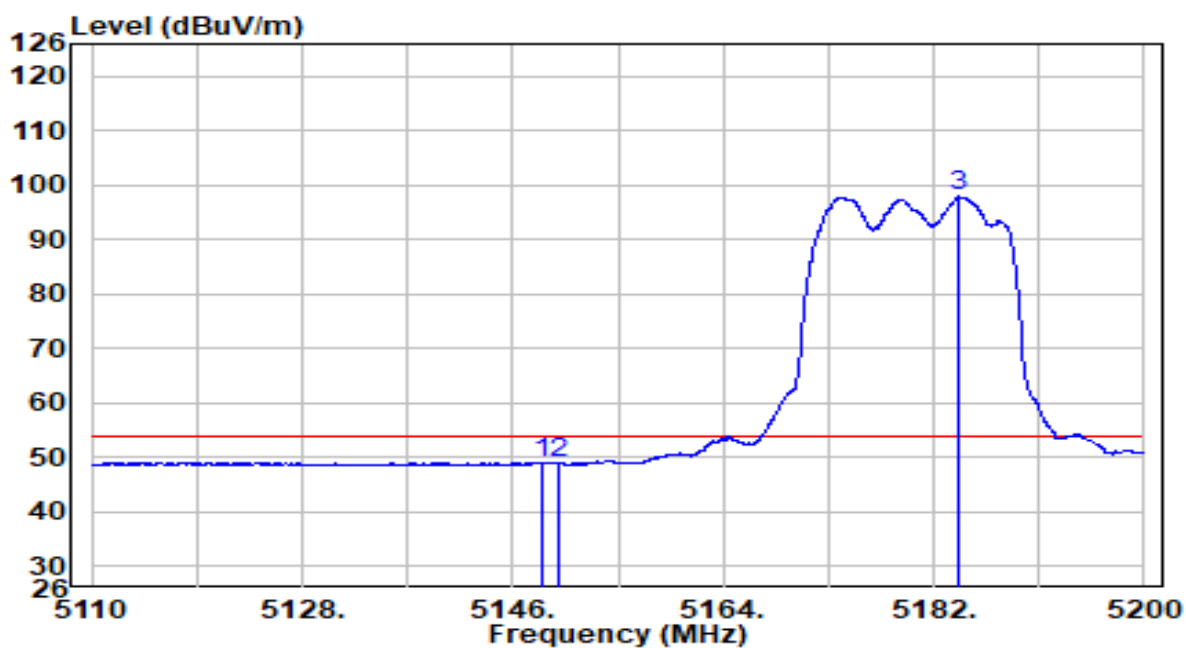


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.430	29.25	19.90	49.16	-4.84	54.00	Average
2	5150.000	28.96	19.91	48.87	-5.13	54.00	Average
3	* 5184.205	78.05	19.94	97.99	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

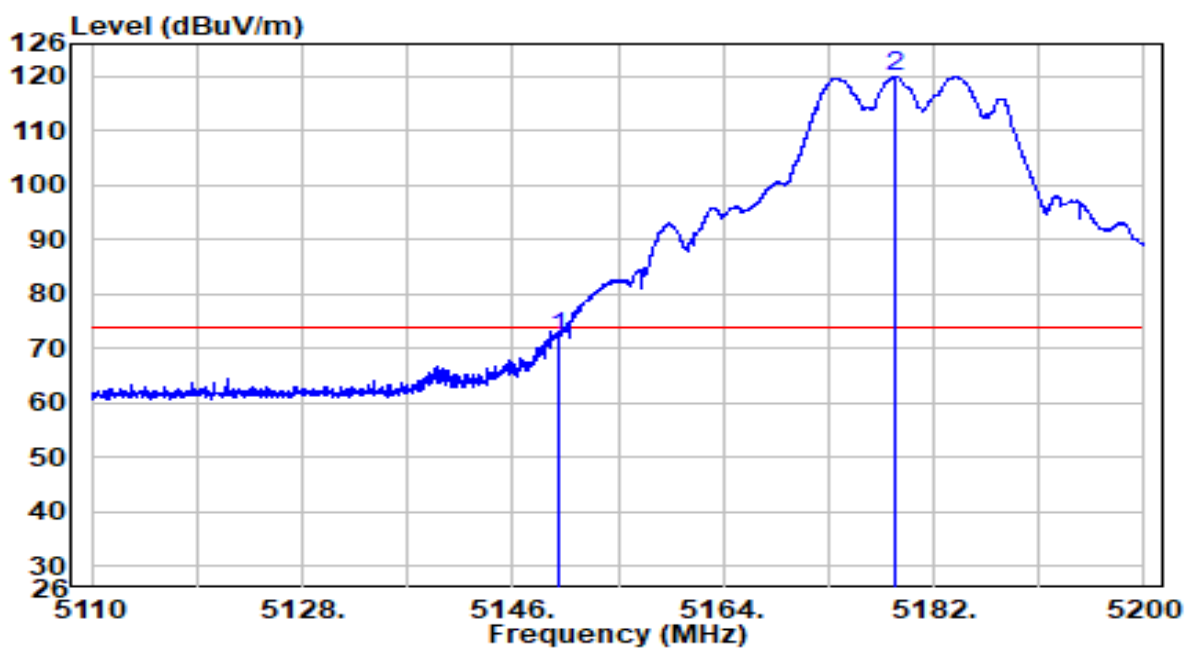


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	52.12	19.91	72.03	-1.97	74.00	Peak
2	* 5178.760	100.11	19.94	120.04	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

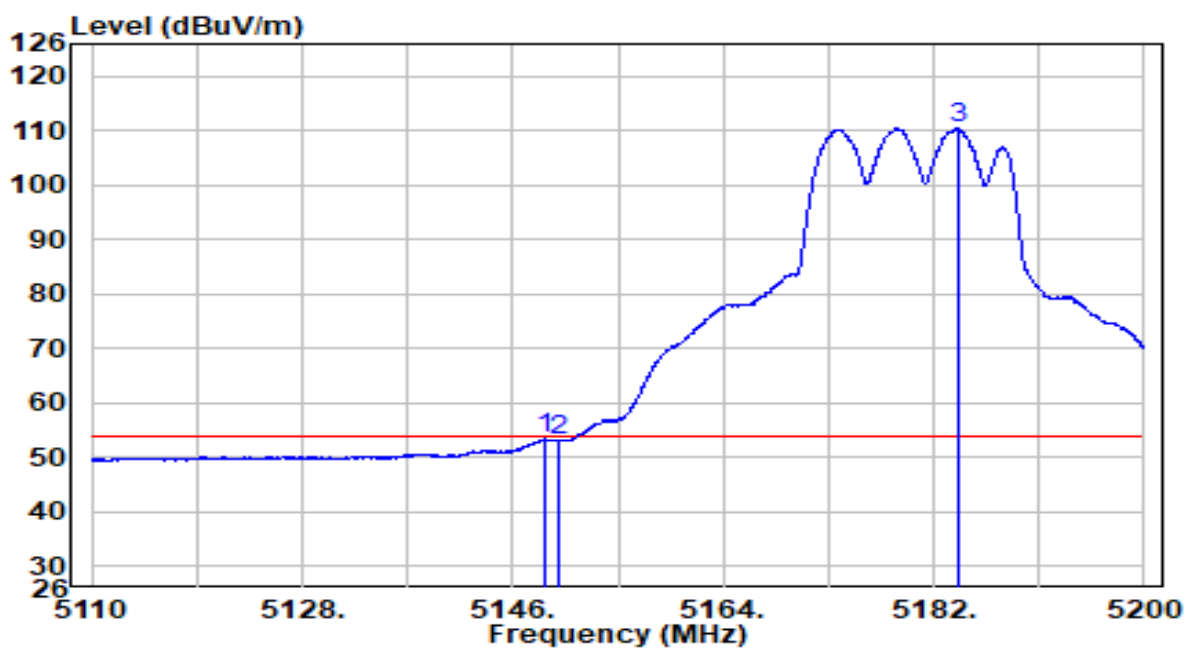


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.745	33.46	19.90	53.36	-0.64	54.00	Average
2	5150.000	33.31	19.91	53.22	-0.78	54.00	Average
3	* 5184.025	90.58	19.94	110.52	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

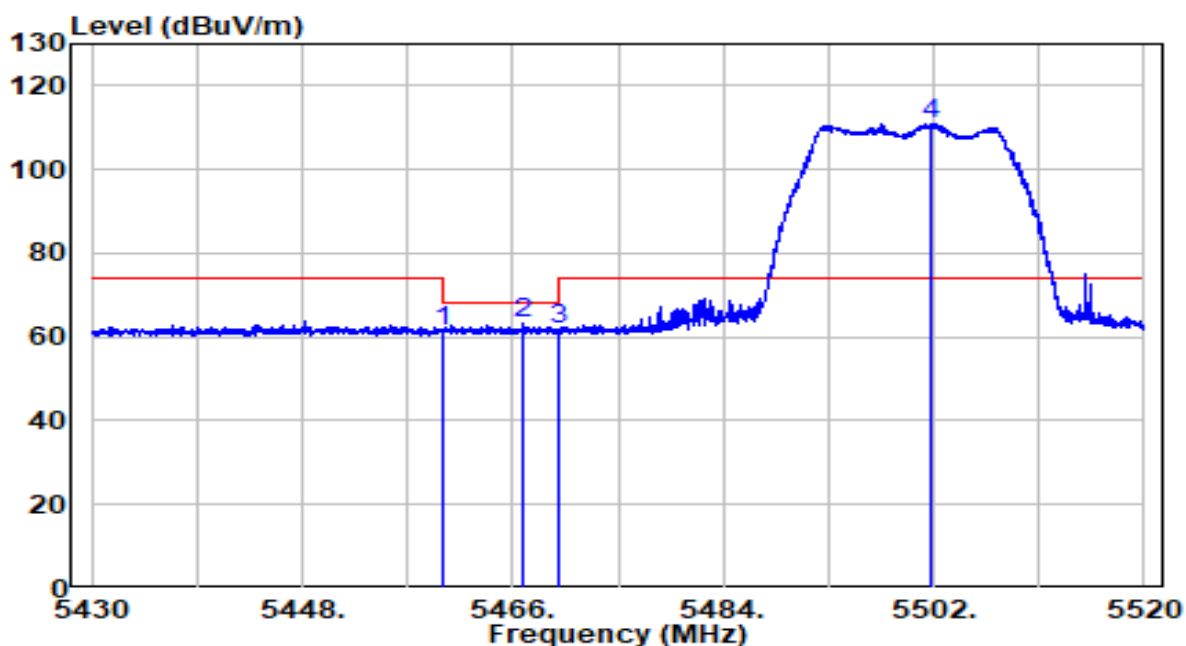


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.85	20.23	61.08	-7.12	68.20	Peak
2	5466.810	43.05	20.24	63.29	-4.91	68.20	Peak
3	5470.000	41.80	20.24	62.04	-6.16	68.20	Peak
4	* 5501.865	90.58	20.28	110.86	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

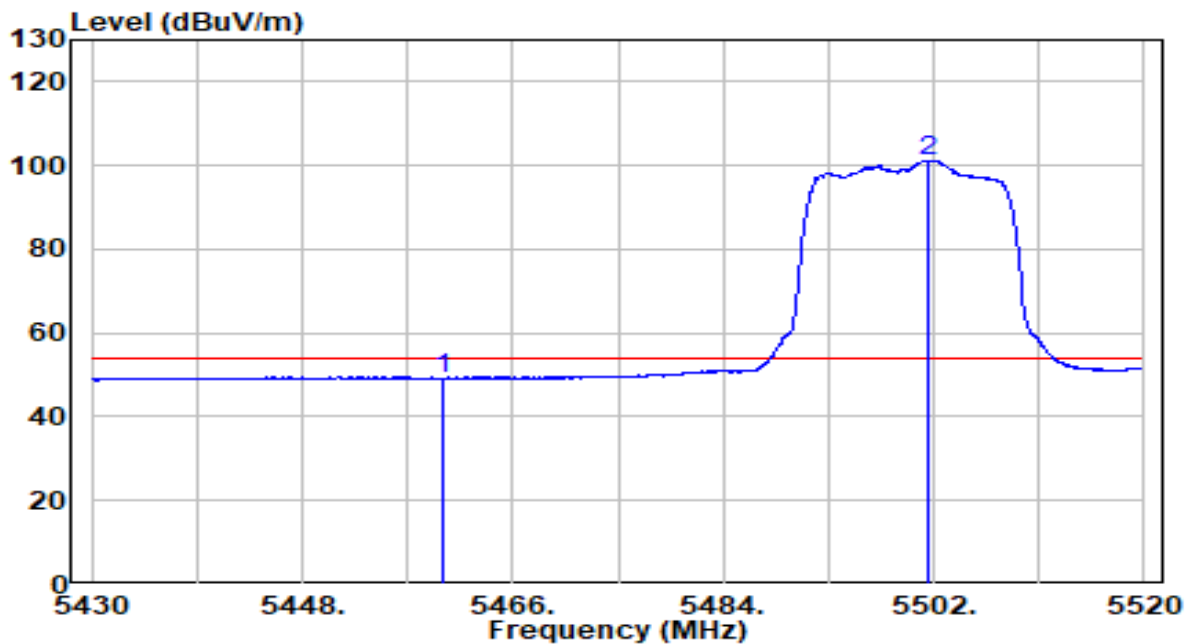


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.06	20.23	49.29	-4.71	54.00	Average
2	* 5501.460	80.91	20.27	101.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

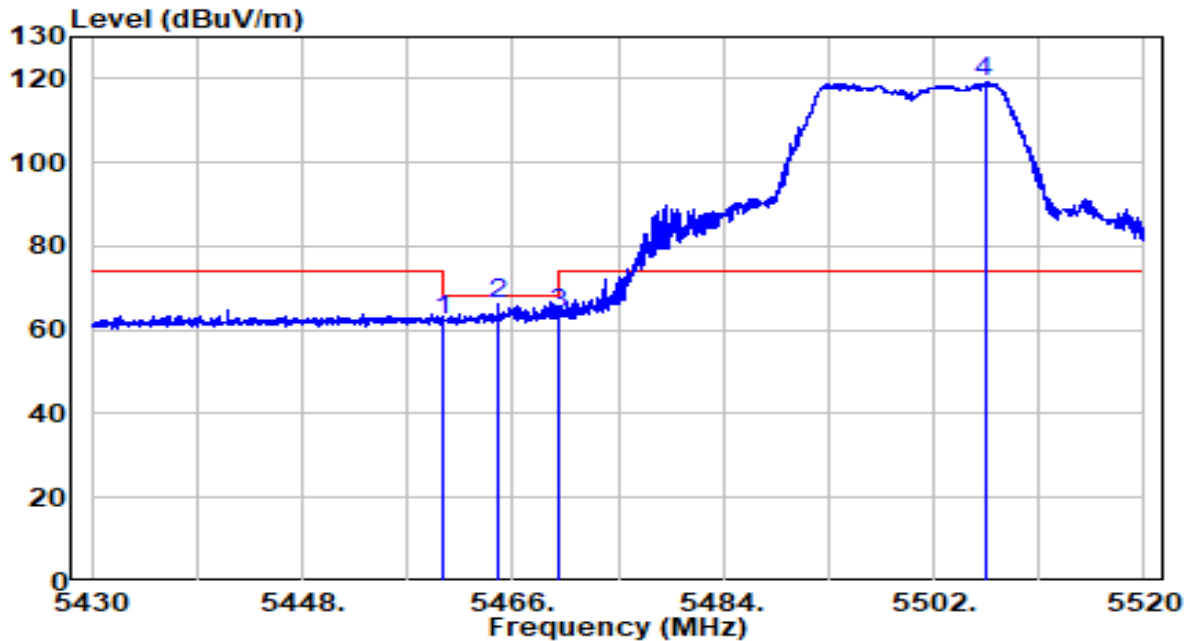


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.015	41.88	20.23	62.11	-6.09	68.20	Peak
2	5464.695	45.81	20.23	66.04	-2.16	68.20	Peak
3	5470.000	43.54	20.24	63.78	-4.42	68.20	Peak
4	* 5506.365	98.76	20.29	119.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

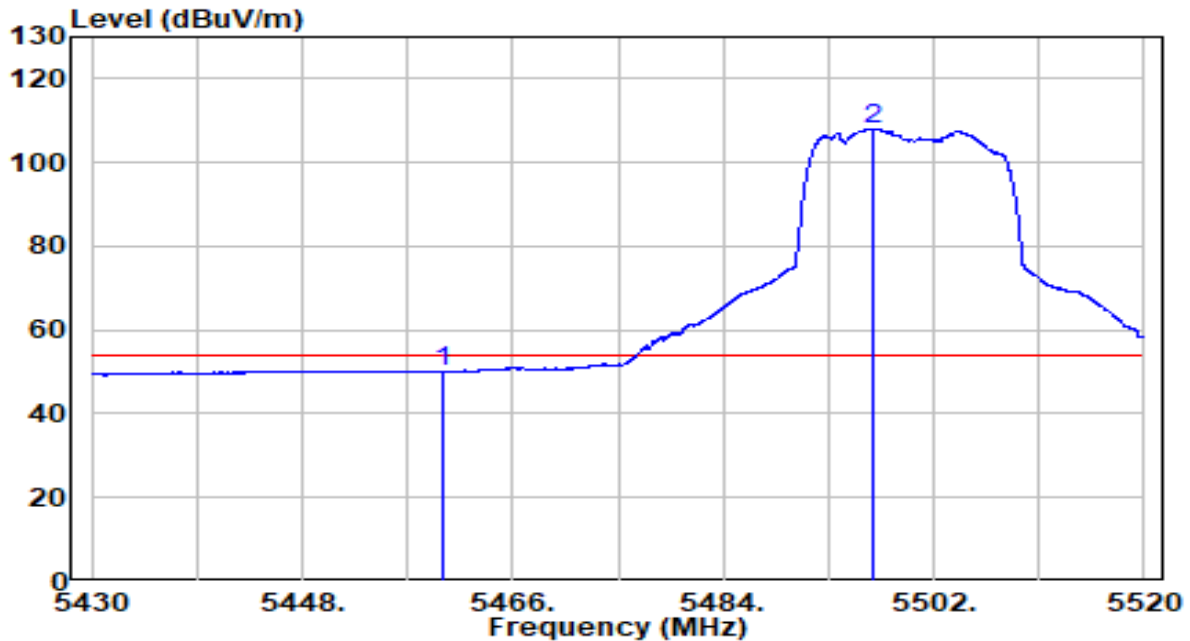


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.79	20.23	50.02	-3.98	54.00	Average
2	* 5496.870	87.82	20.27	108.09	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

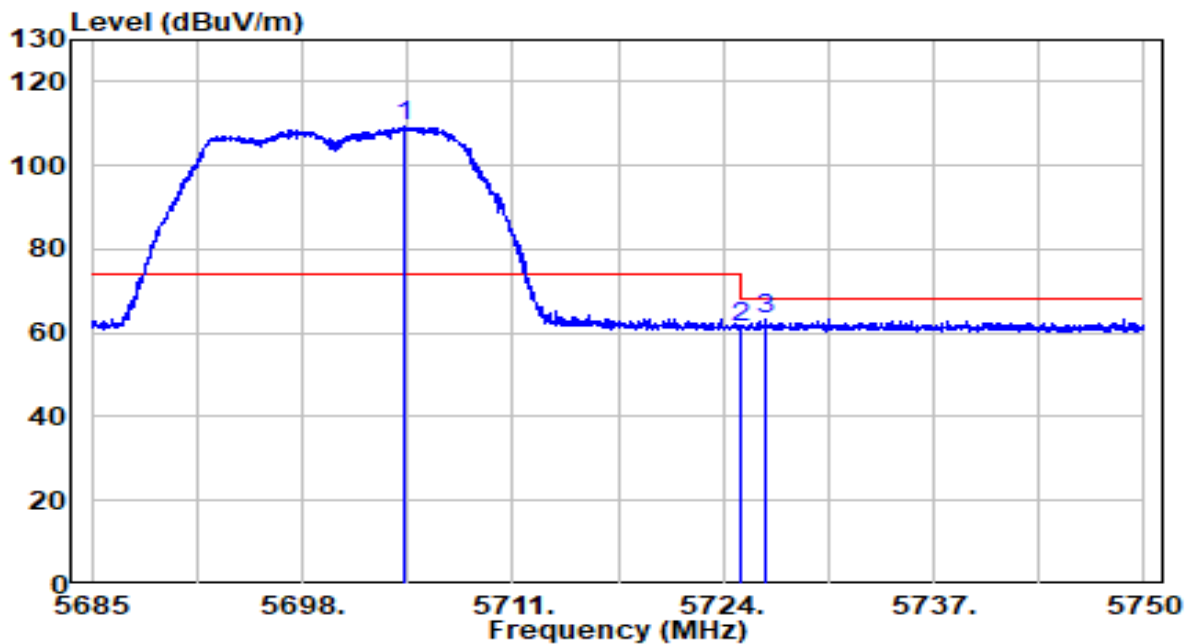


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5704.305	88.25	20.93	109.18	N/A	N/A	Peak
2		5725.000	40.22	21.00	61.22	-6.98	68.20	Peak
3		5726.665	42.07	21.00	63.07	-5.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

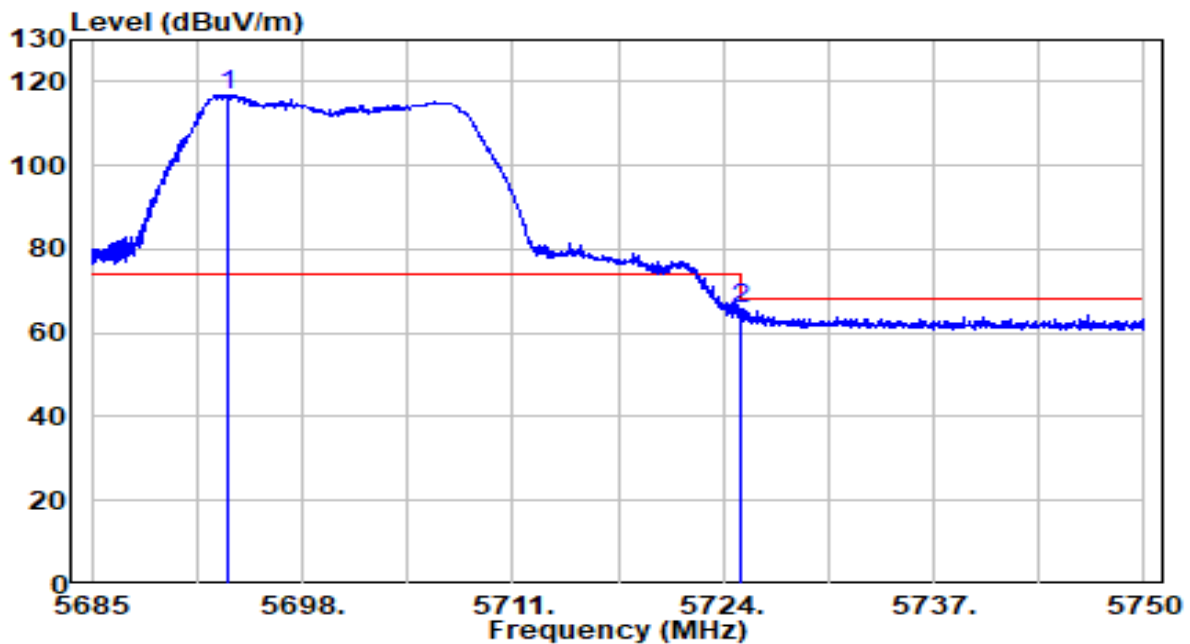


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5693.482	96.05	20.90	116.94	N/A	N/A	Peak
2		5725.000	44.97	21.00	65.97	-2.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

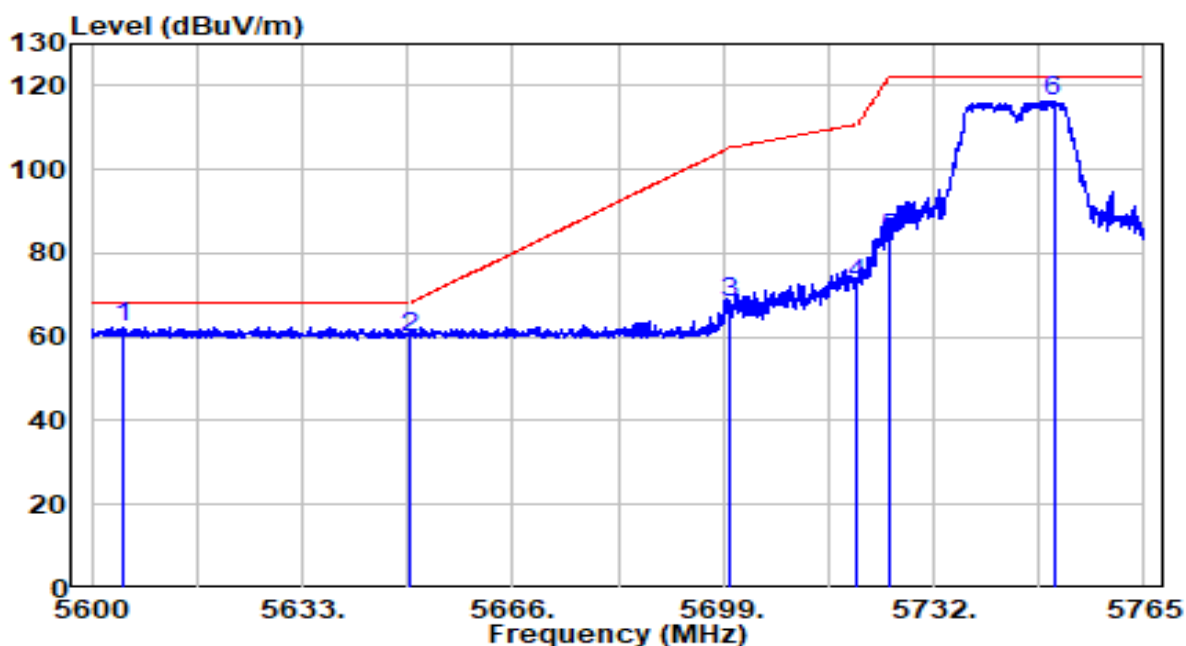


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5605.115	41.92	20.61	62.53	-5.67	68.20	Peak
2		5650.000	39.02	20.76	59.77	-8.43	68.20	Peak
3		5700.000	47.43	20.92	68.35	-36.85	105.20	Peak
4		5720.000	51.85	20.98	72.83	-37.97	110.80	Peak
5		5725.000	62.34	21.00	83.34	-38.86	122.20	Peak
6		5750.810	95.31	21.08	116.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

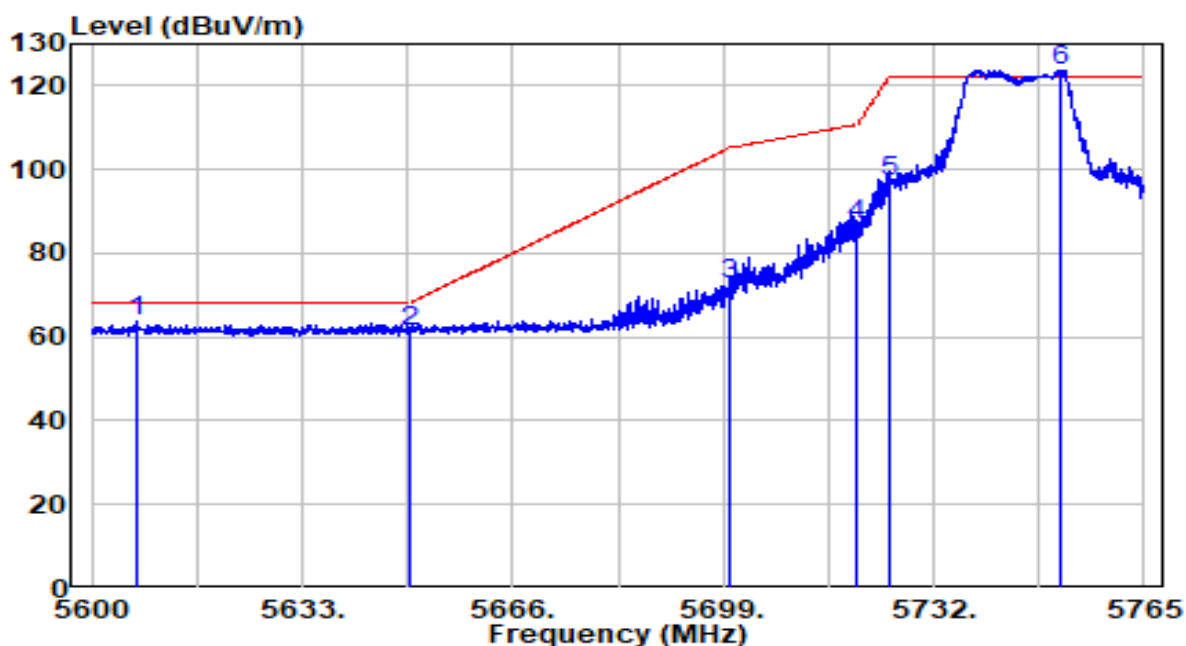


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5607.260	43.03	20.62	63.65	-4.55	68.20	Peak
2	5650.000	40.68	20.76	61.44	-6.76	68.20	Peak
3	5700.000	51.63	20.92	72.55	-32.65	105.20	Peak
4	5720.000	65.72	20.98	86.70	-24.10	110.80	Peak
5	5725.000	76.32	21.00	97.32	-24.88	122.20	Peak
6	* 5751.717	102.75	21.09	123.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

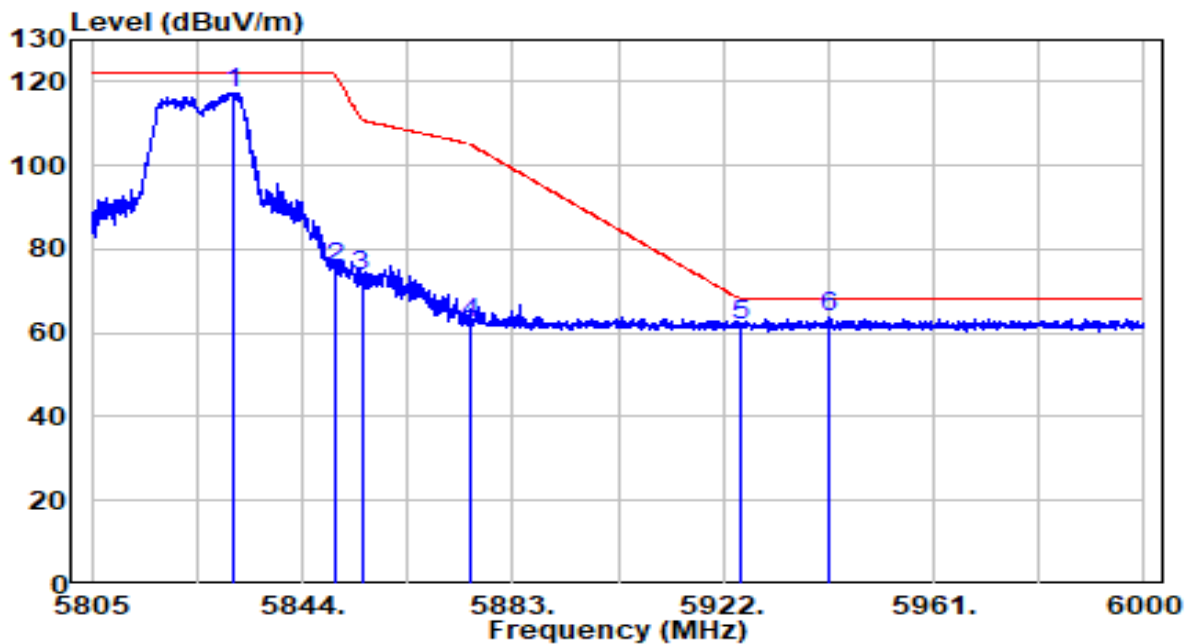


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5831.033	96.13	21.34	117.47	N/A	N/A	Peak
2	5850.000	54.39	21.40	75.79	-46.41	122.20	Peak
3	5855.000	52.19	21.42	73.61	-37.19	110.80	Peak
4	5875.000	40.97	21.49	62.46	-42.74	105.20	Peak
5	5925.000	40.09	21.65	61.74	-6.46	68.20	Peak
6	* 5941.402	42.21	21.70	63.91	-4.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

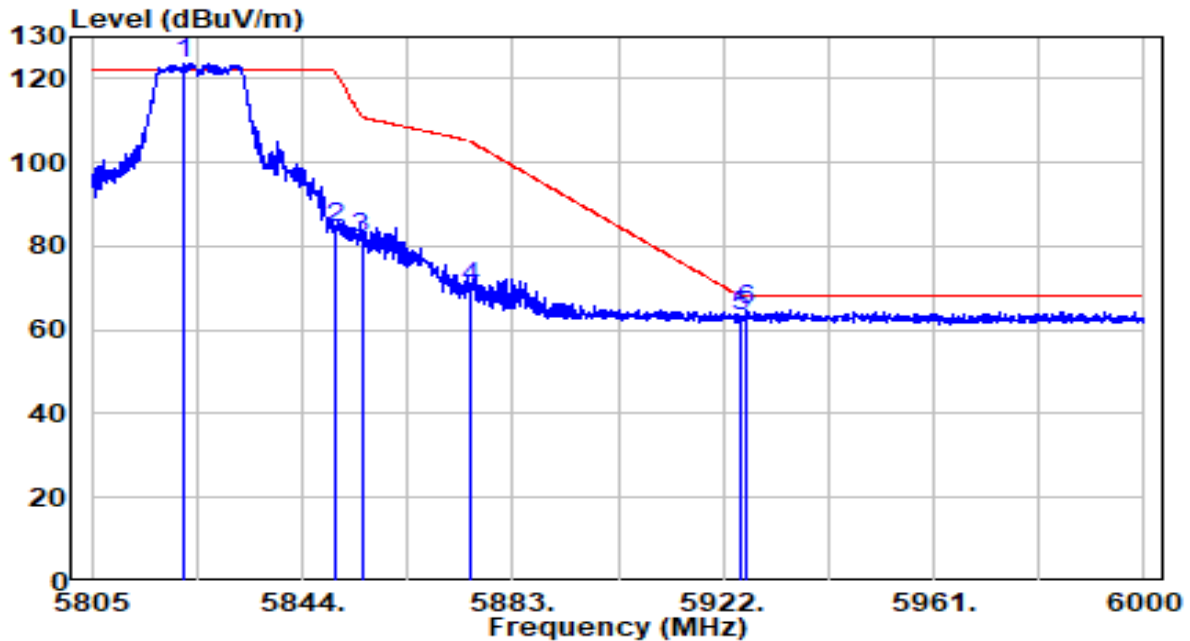


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5822.160	102.35	21.31	123.66	N/A	N/A	Peak
2		5850.000	63.03	21.40	84.43	-37.77	122.20	Peak
3		5855.000	60.45	21.42	81.87	-28.93	110.80	Peak
4		5875.000	48.57	21.49	70.06	-35.14	105.20	Peak
5		5925.000	41.60	21.65	63.25	-4.95	68.20	Peak
6		5926.388	43.13	21.65	64.78	-3.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

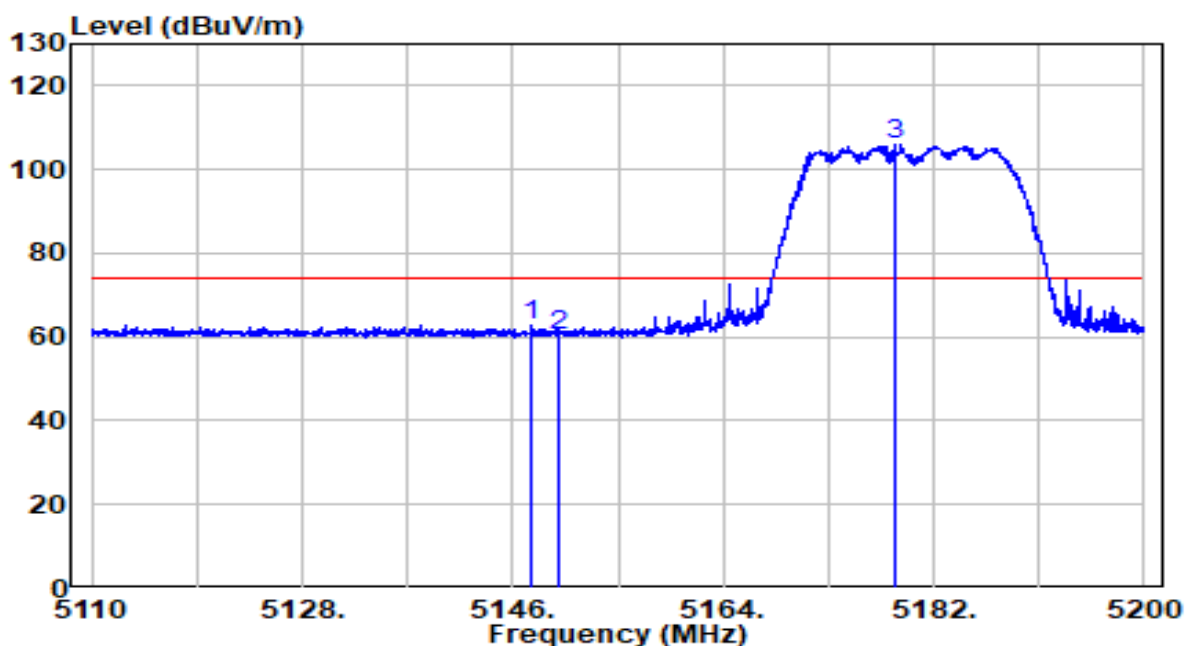


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.665	43.13	19.90	63.03	-10.97	74.00	Peak
2	5150.000	40.52	19.91	60.42	-13.58	74.00	Peak
3	* 5178.670	86.16	19.94	106.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

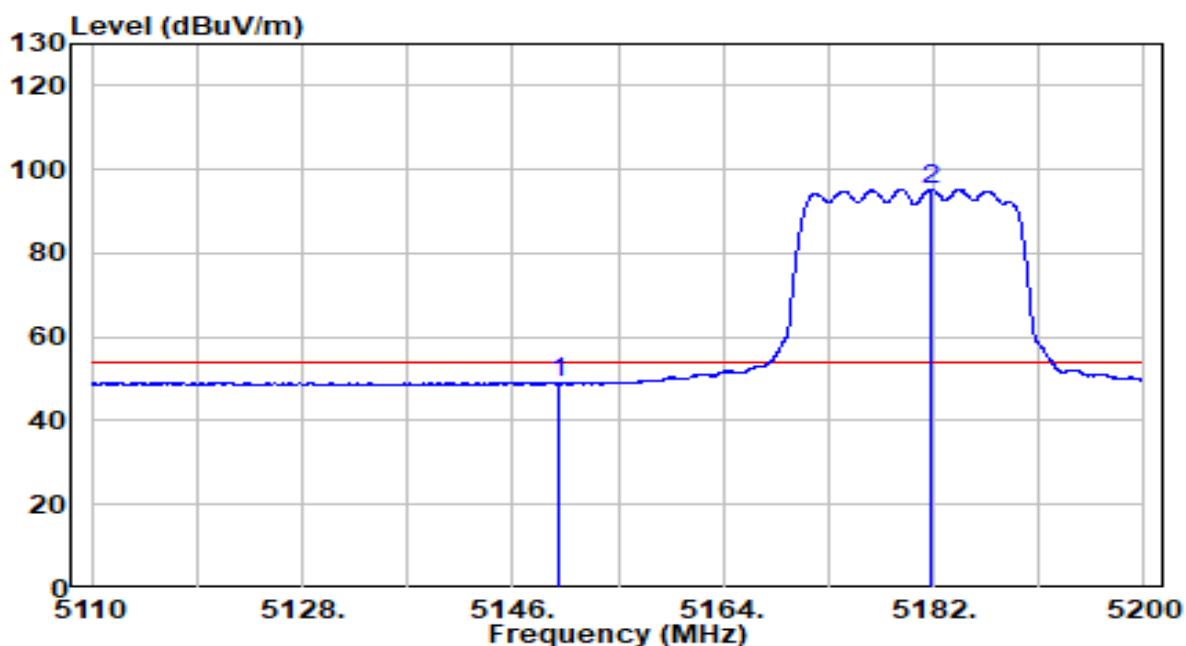


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.05	19.91	48.96	-5.04	54.00	Average
2	* 5181.775	75.40	19.94	95.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

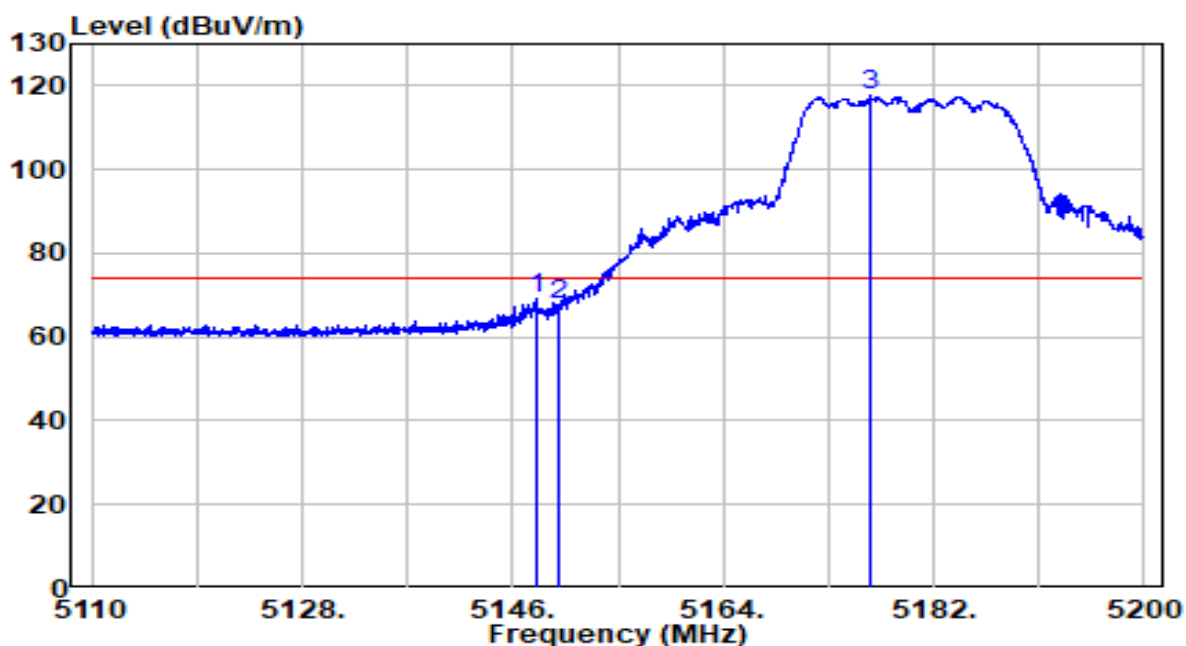


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.025	49.33	19.90	69.23	-4.77	74.00	Peak
2	5150.000	47.59	19.91	67.50	-6.50	74.00	Peak
3	* 5176.600	97.67	19.93	117.60	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

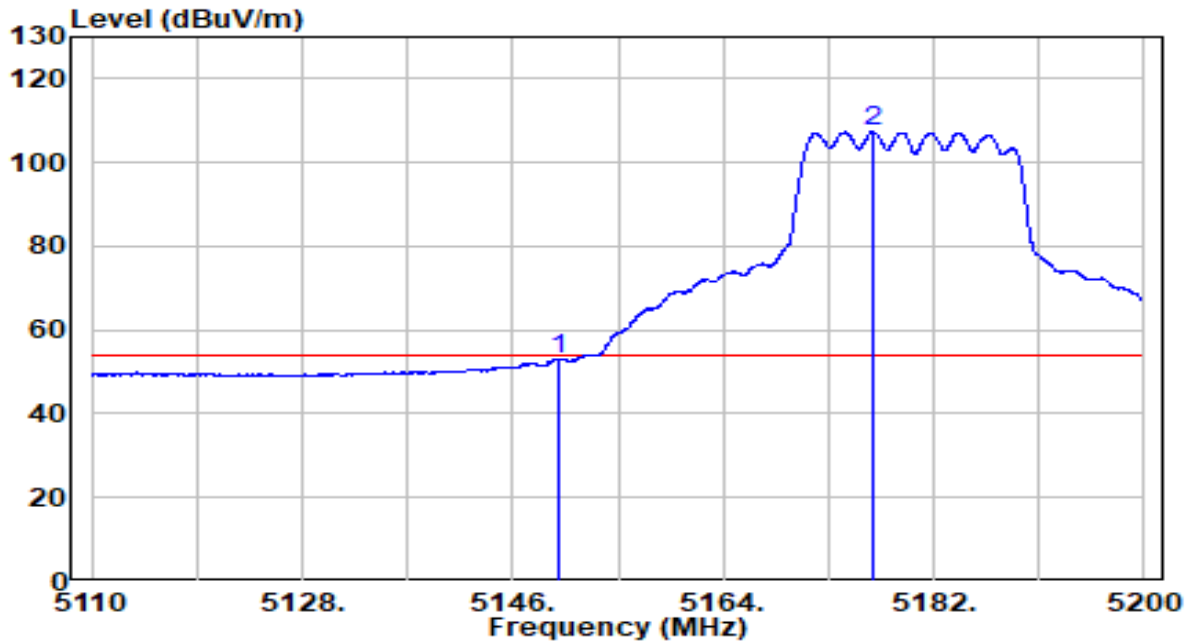


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	32.89	19.91	52.79	-1.21	54.00	Average
2	* 5176.780	87.32	19.93	107.25	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

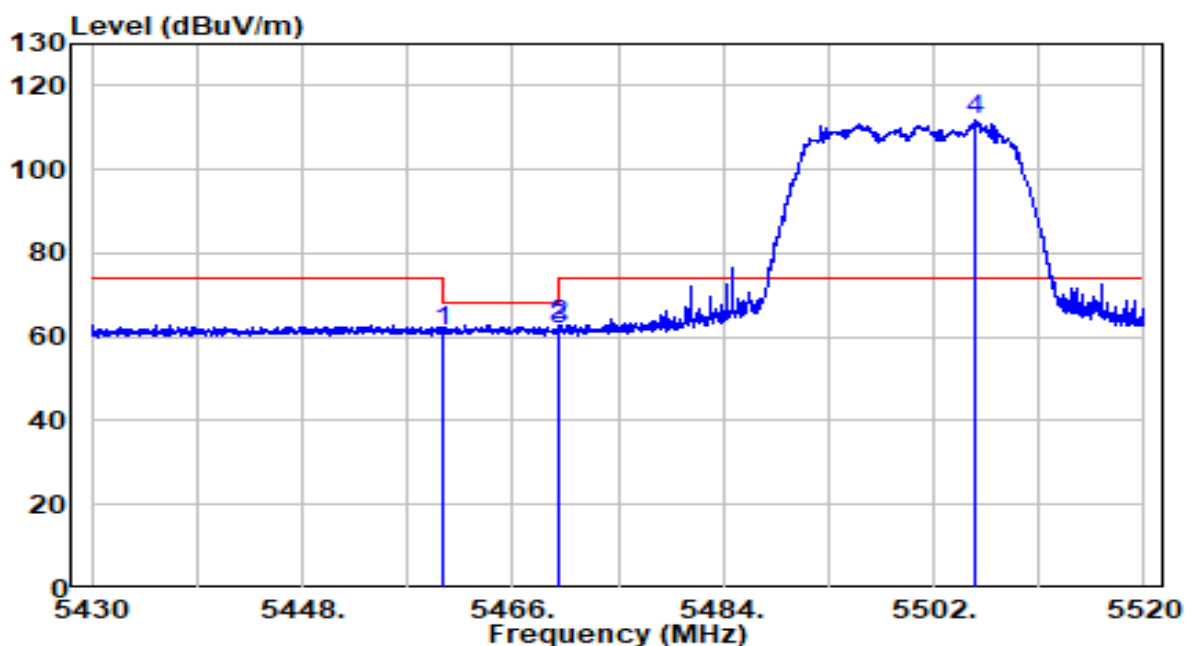


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.85	20.23	61.08	-7.12	68.20	Peak
2	5469.825	42.72	20.24	62.96	-5.24	68.20	Peak
3	5470.000	41.65	20.24	61.89	-6.31	68.20	Peak
4	* 5505.645	91.32	20.29	111.61	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

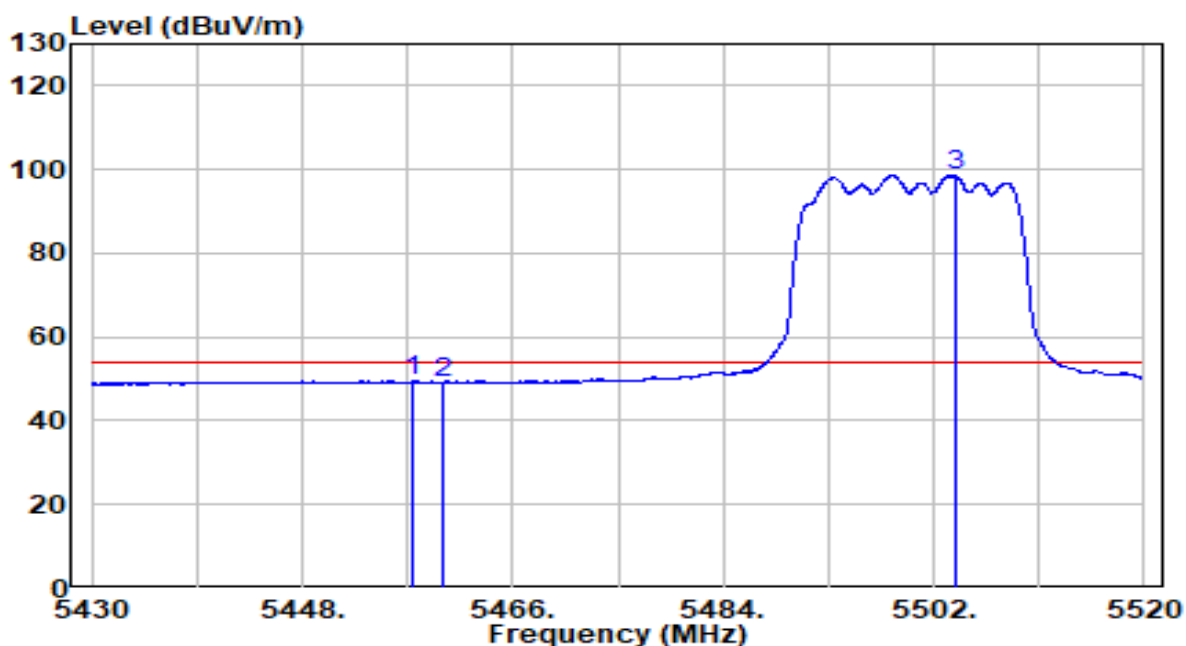


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.540	29.22	20.23	49.45	-4.55	54.00	Average
2	5460.000	29.06	20.23	49.29	-4.71	54.00	Average
3	* 5503.800	78.30	20.28	98.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

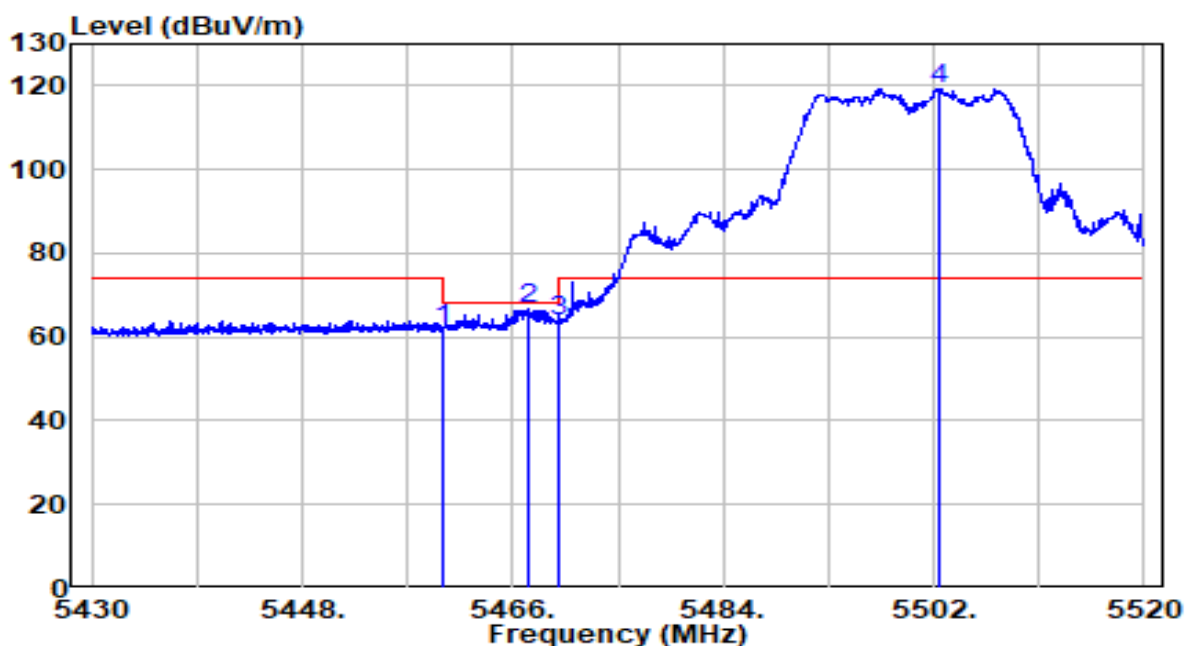


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.77	20.23	62.00	-6.20	68.20	Peak
2	5467.350	46.52	20.24	66.76	-1.44	68.20	Peak
3	5470.000	43.66	20.24	63.90	-4.30	68.20	Peak
4	* 5502.540	99.14	20.28	119.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

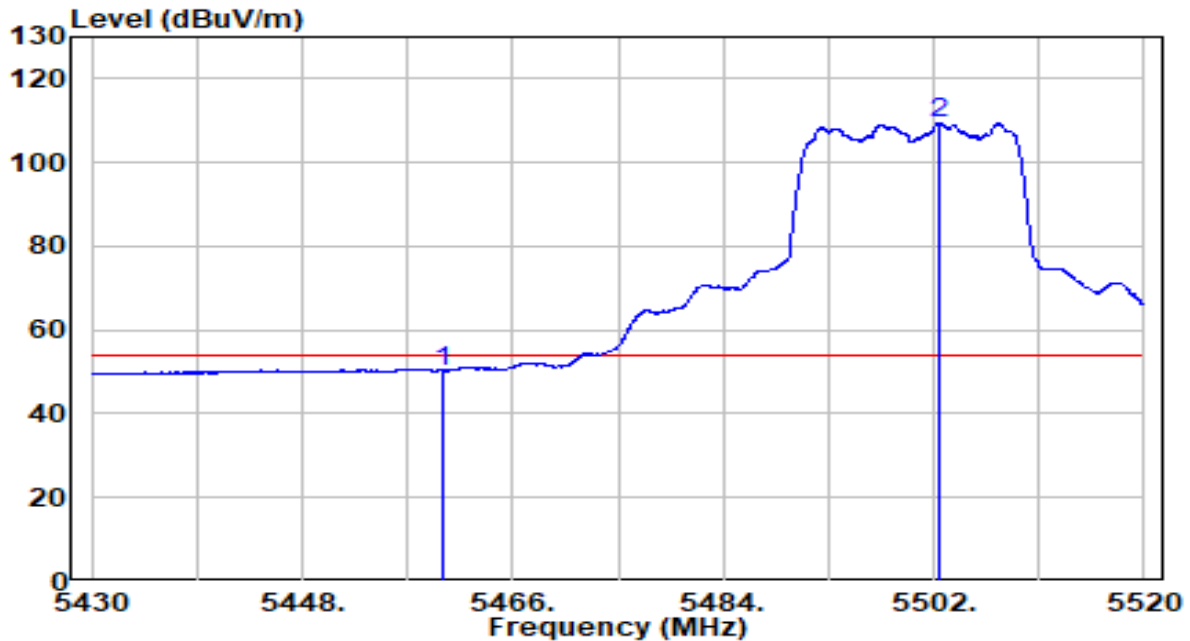


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.03	20.23	50.26	-3.74	54.00	Average
2	* 5502.495	89.18	20.28	109.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

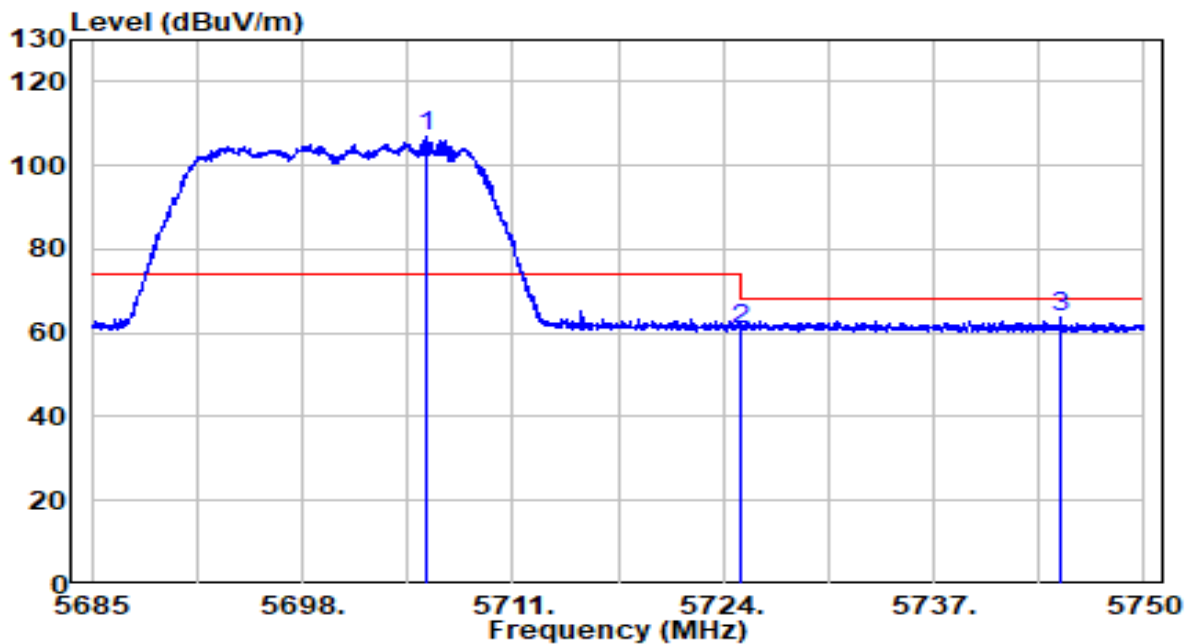


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5705.670	85.91	20.94	106.85	N/A	N/A	Peak
2		5725.000	39.94	21.00	60.94	-7.26	68.20	Peak
3		5744.800	42.47	21.06	63.53	-4.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

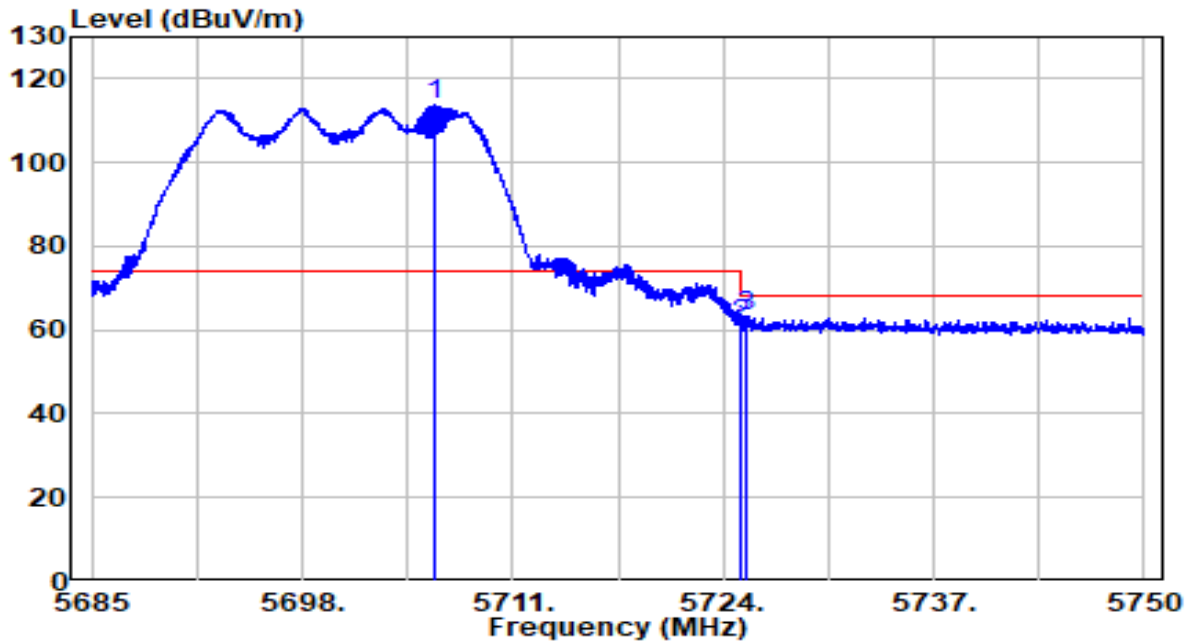


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5706.125	92.66	20.94	113.60	N/A	N/A	Peak
2		5725.000	40.49	21.00	61.49	-6.71	68.20	Peak
3		5725.430	42.22	21.00	63.22	-4.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

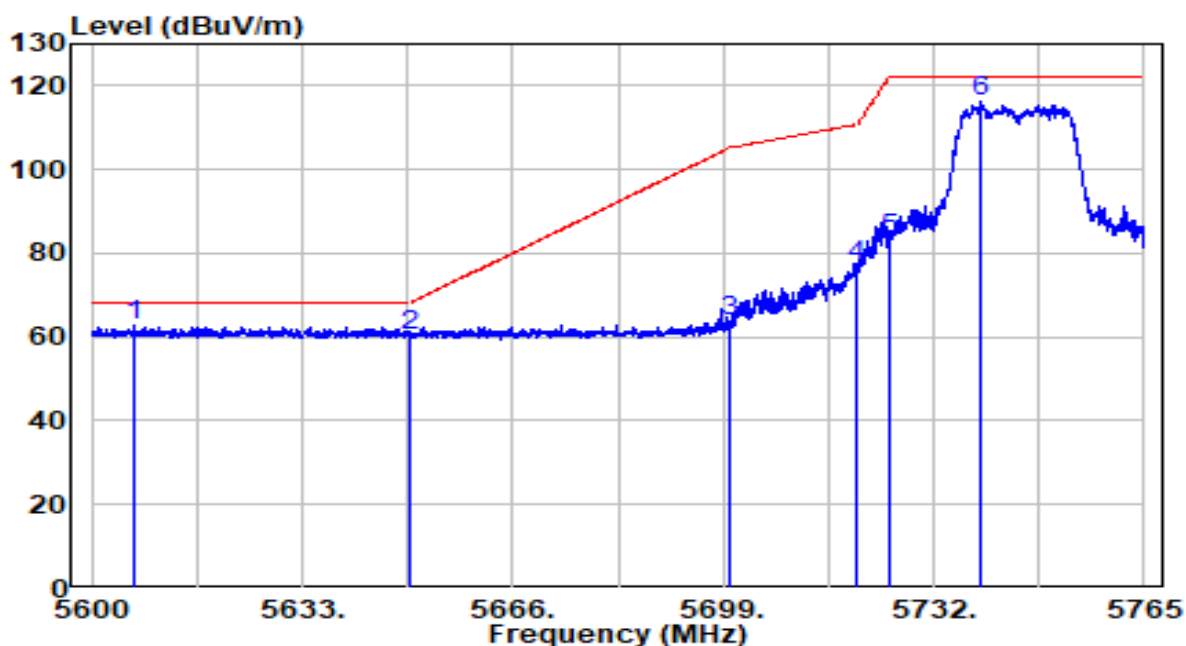


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5606.765	41.95	20.62	62.57	-5.63	68.20	Peak
2		5650.000	39.56	20.76	60.31	-7.89	68.20	Peak
3		5700.000	42.87	20.92	63.79	-41.41	105.20	Peak
4		5720.000	55.91	20.98	76.89	-33.91	110.80	Peak
5		5725.000	62.44	21.00	83.44	-38.76	122.20	Peak
6		5739.507	95.09	21.05	116.14	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

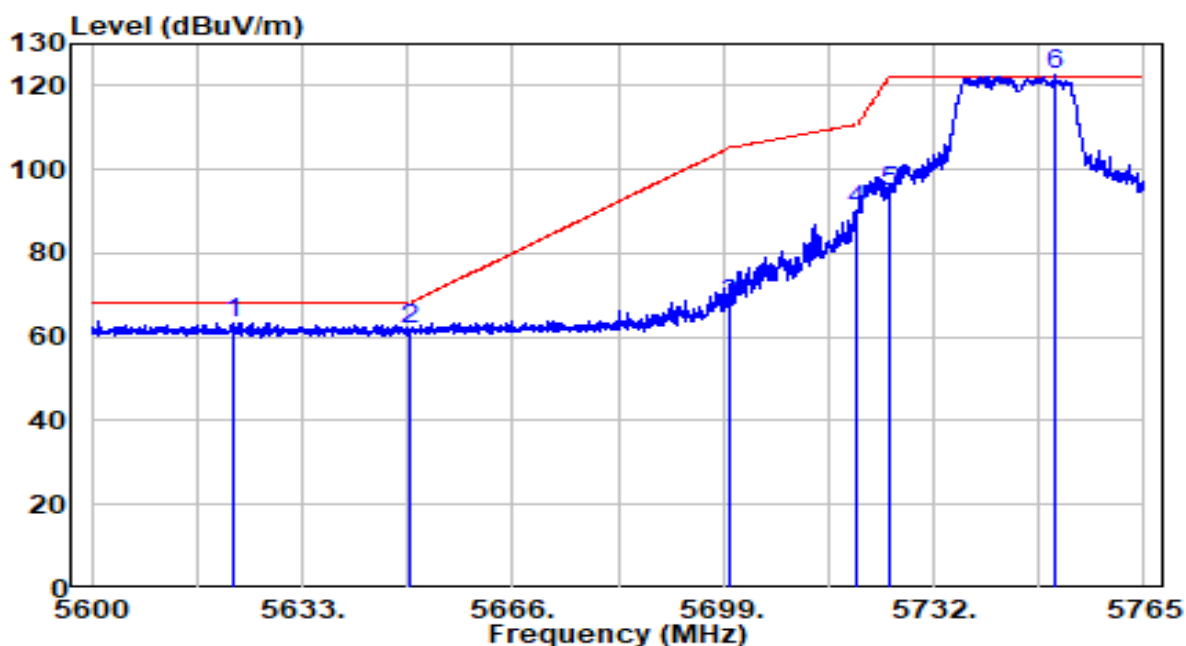


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5622.192	42.77	20.67	63.44	-4.76	68.20	Peak
2	5650.000	41.24	20.76	62.00	-6.20	68.20	Peak
3	5700.000	46.92	20.92	67.84	-37.36	105.20	Peak
4	5720.000	69.19	20.98	90.17	-20.63	110.80	Peak
5	5725.000	73.71	21.00	94.71	-27.49	122.20	Peak
6	* 5751.140	101.39	21.08	122.47	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

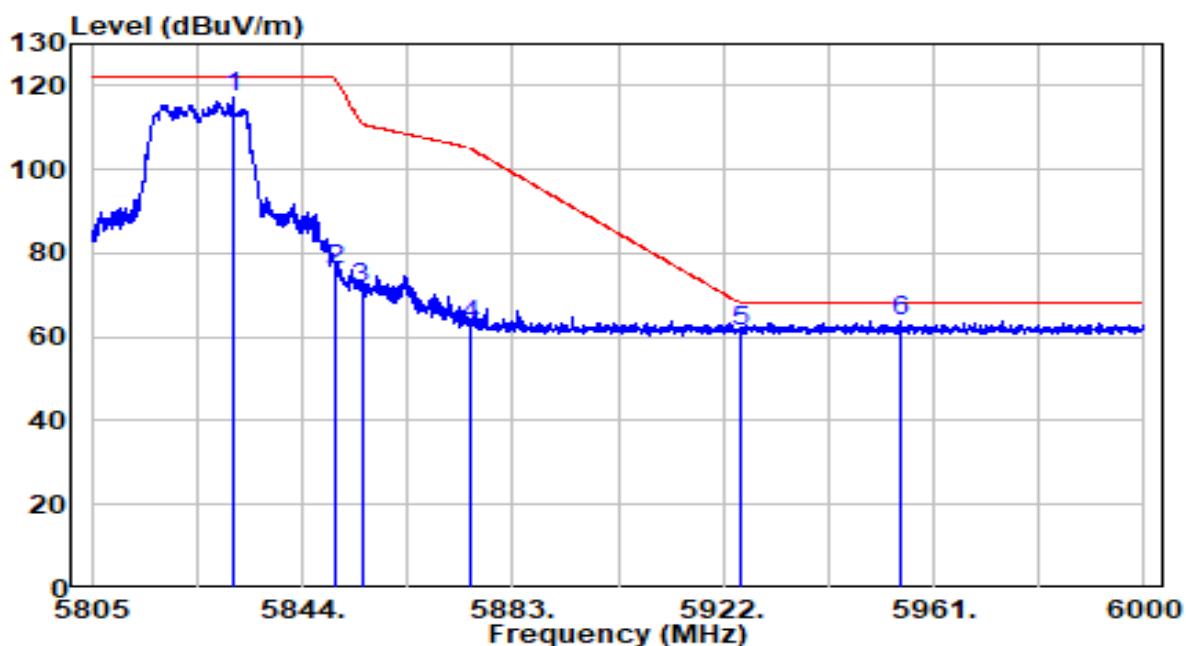


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5831.033	95.68	21.34	117.02	N/A	N/A	Peak
2	5850.000	54.82	21.40	76.22	-45.98	122.20	Peak
3	5855.000	50.33	21.42	71.75	-39.05	110.80	Peak
4	5875.000	41.11	21.49	62.59	-42.61	105.20	Peak
5	5925.000	39.54	21.65	61.19	-7.01	68.20	Peak
6	* 5954.663	41.91	21.74	63.65	-4.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

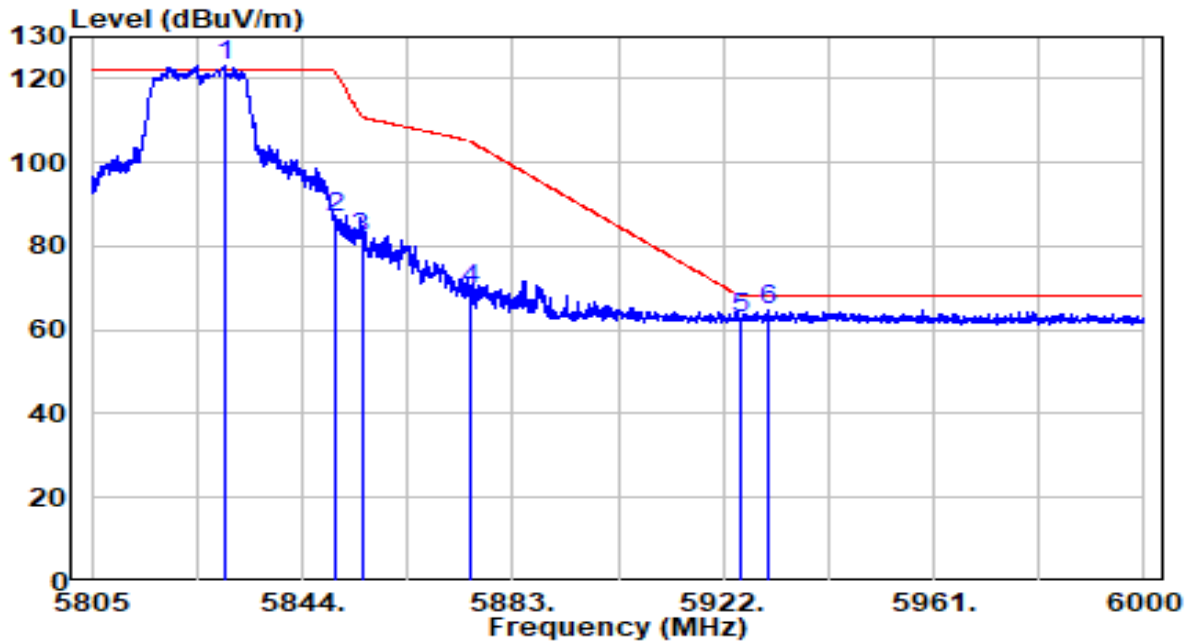


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5829.570	101.73	21.34	123.07	N/A	N/A	Peak
2		5850.000	65.57	21.40	86.97	-35.23	122.20	Peak
3		5855.000	60.55	21.42	81.97	-28.83	110.80	Peak
4		5875.000	48.18	21.49	69.67	-35.53	105.20	Peak
5		5925.000	41.11	21.65	62.76	-5.44	68.20	Peak
6		5930.190	43.31	21.66	64.97	-3.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

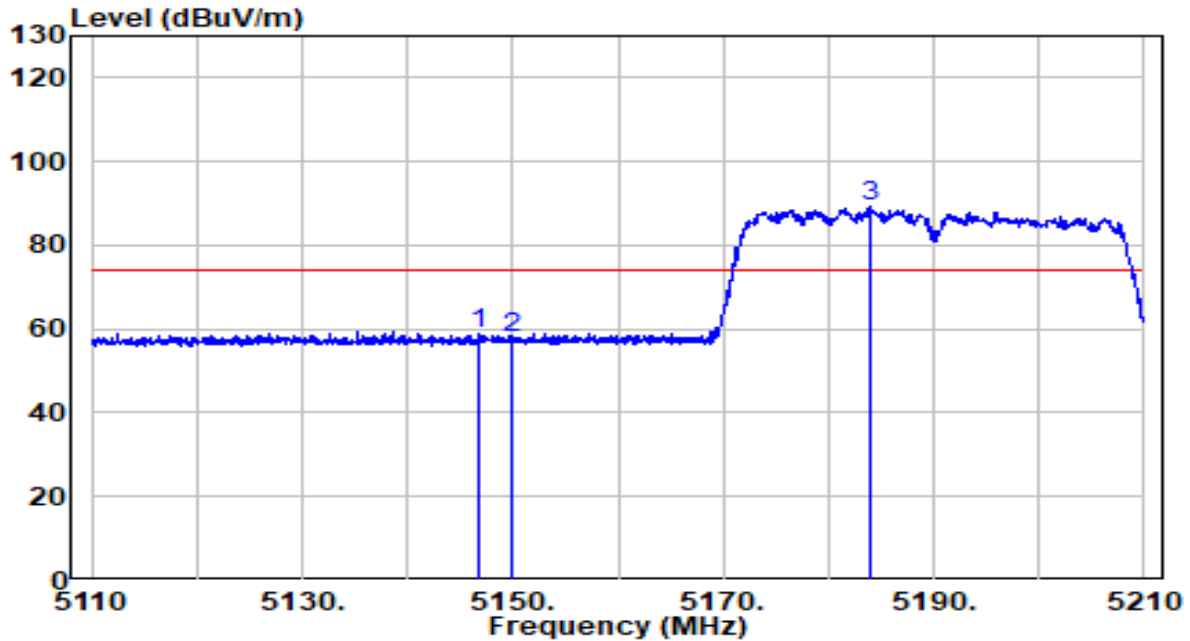


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.900	38.88	19.90	58.78	-15.22	74.00	Peak
2	5150.000	38.21	19.91	58.12	-15.88	74.00	Peak
3	* 5183.900	69.24	19.94	89.18	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

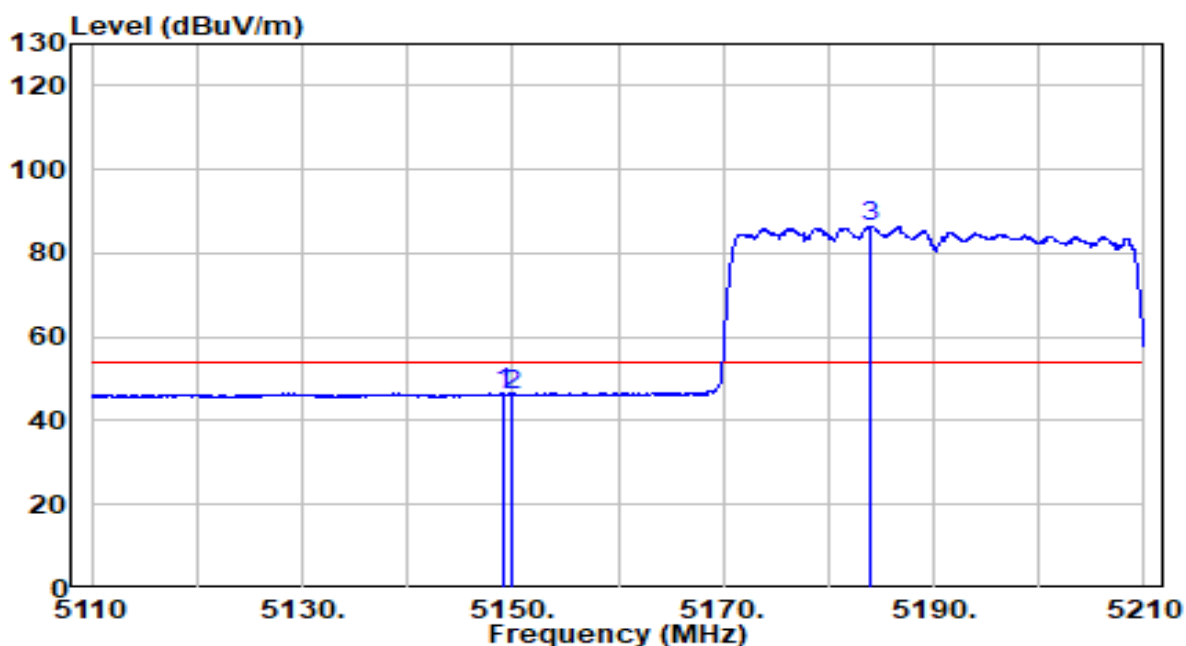


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.100	26.62	19.91	46.52	-7.48	54.00	Average
2	5150.000	26.19	19.91	46.10	-7.90	54.00	Average
3	* 5184.050	66.49	19.94	86.43	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

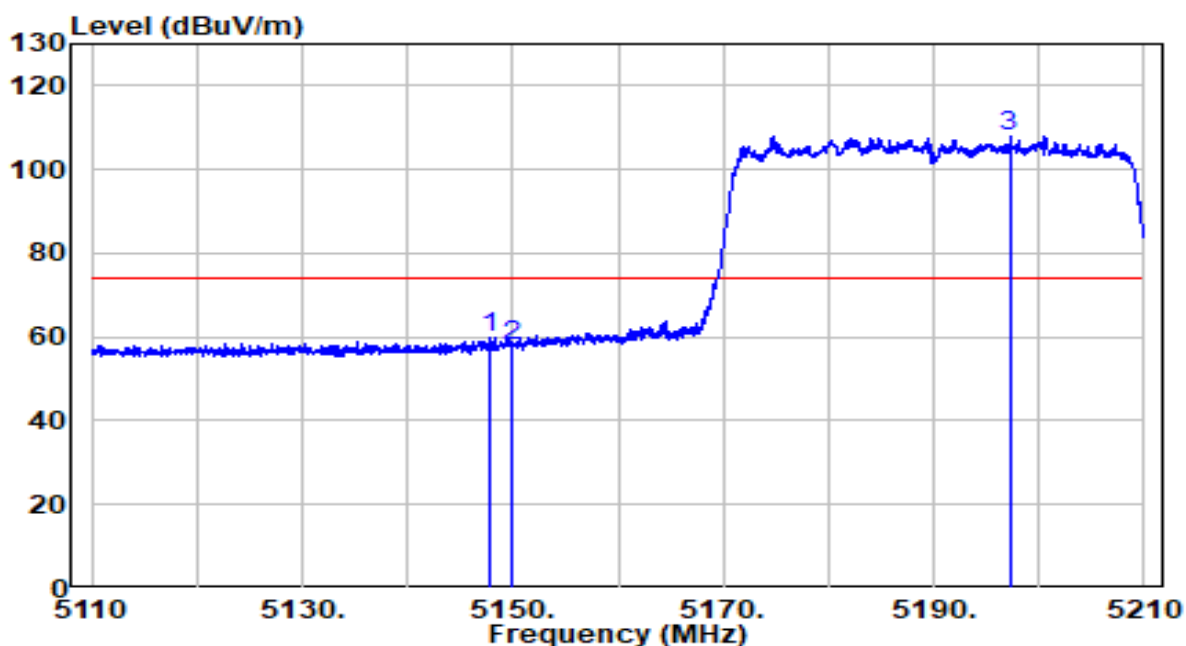


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.700	40.11	19.90	60.01	-13.99	74.00	Peak
2	5150.000	37.74	19.91	57.65	-16.35	74.00	Peak
3	* 5197.200	88.03	19.96	107.99	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

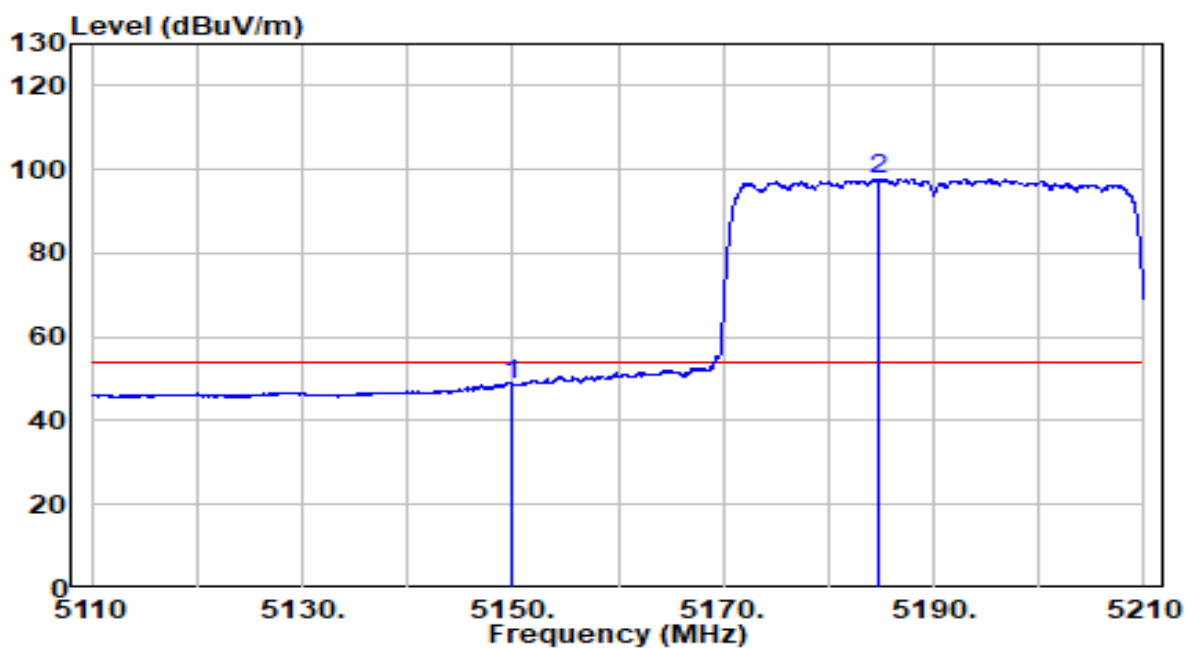


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.84	19.91	48.75	-5.25	54.00	Average
2	* 5184.800	77.69	19.94	97.64	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

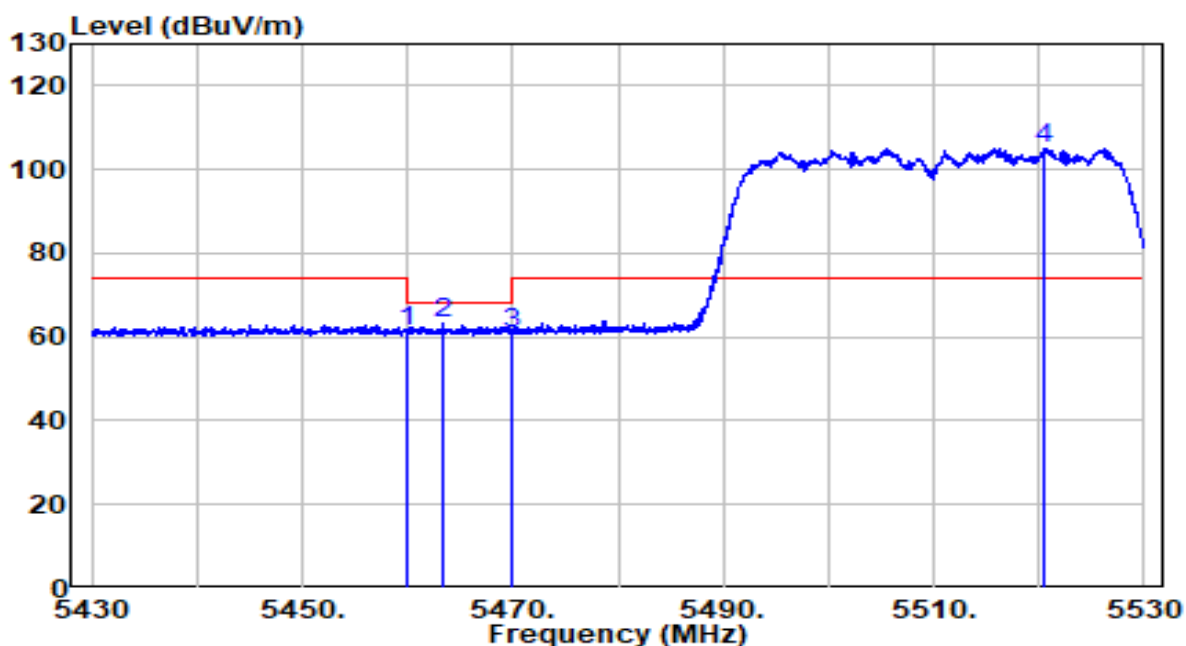


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.97	20.23	61.20	-7.00	68.20	Peak
2	5463.350	42.90	20.23	63.13	-5.07	68.20	Peak
3	5470.000	40.74	20.24	60.98	-7.22	68.20	Peak
4	* 5520.500	84.84	20.34	105.18	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

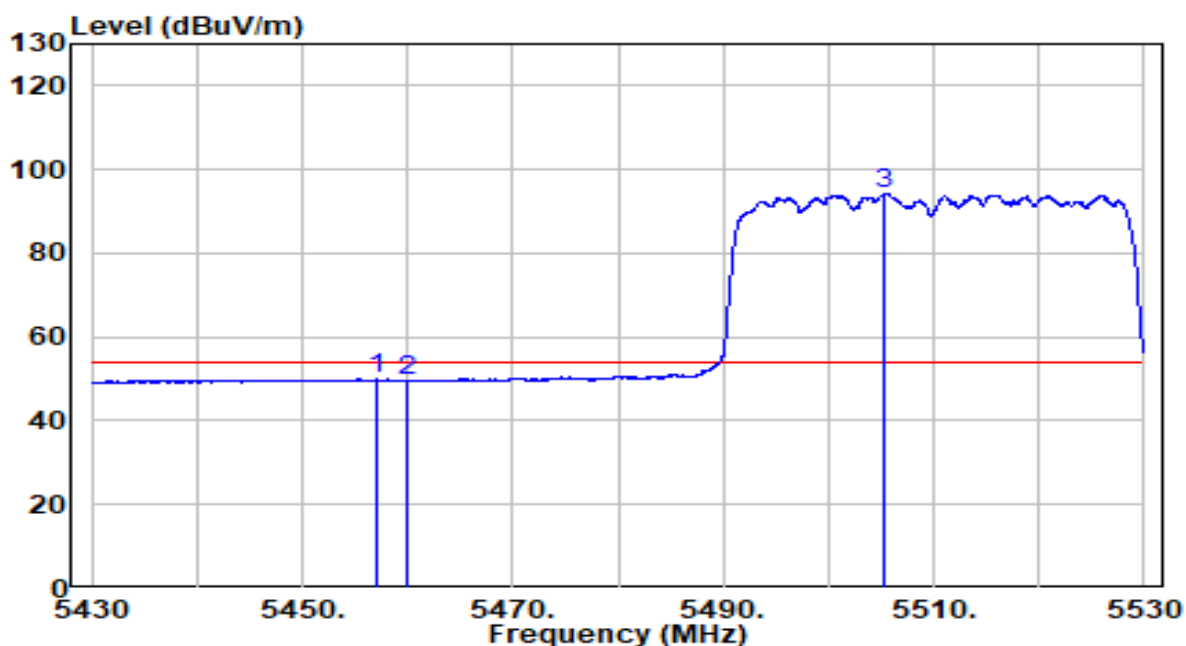


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.050	29.65	20.23	49.88	-4.12	54.00	Average
2	5460.000	29.40	20.23	49.63	-4.37	54.00	Average
3	* 5505.400	73.87	20.29	94.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

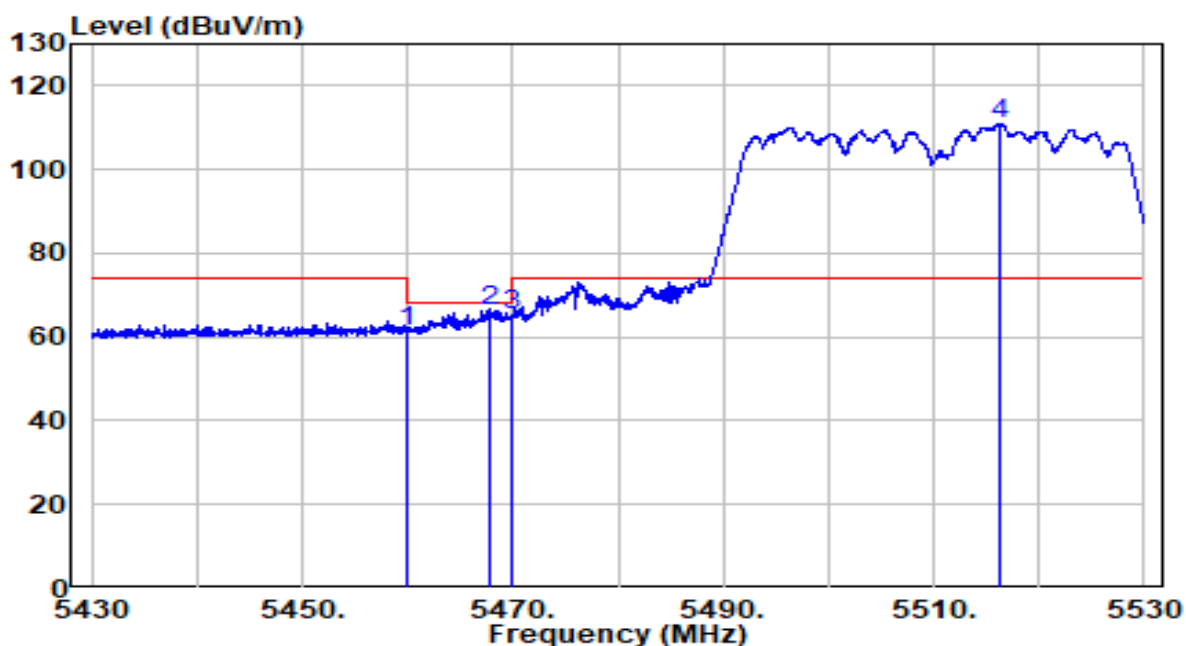


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.24	20.23	61.47	-6.73	68.20	Peak
2	5467.900	46.23	20.24	66.47	-1.73	68.20	Peak
3	5470.000	44.84	20.24	65.08	-3.12	68.20	Peak
4	* 5516.350	90.73	20.32	111.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

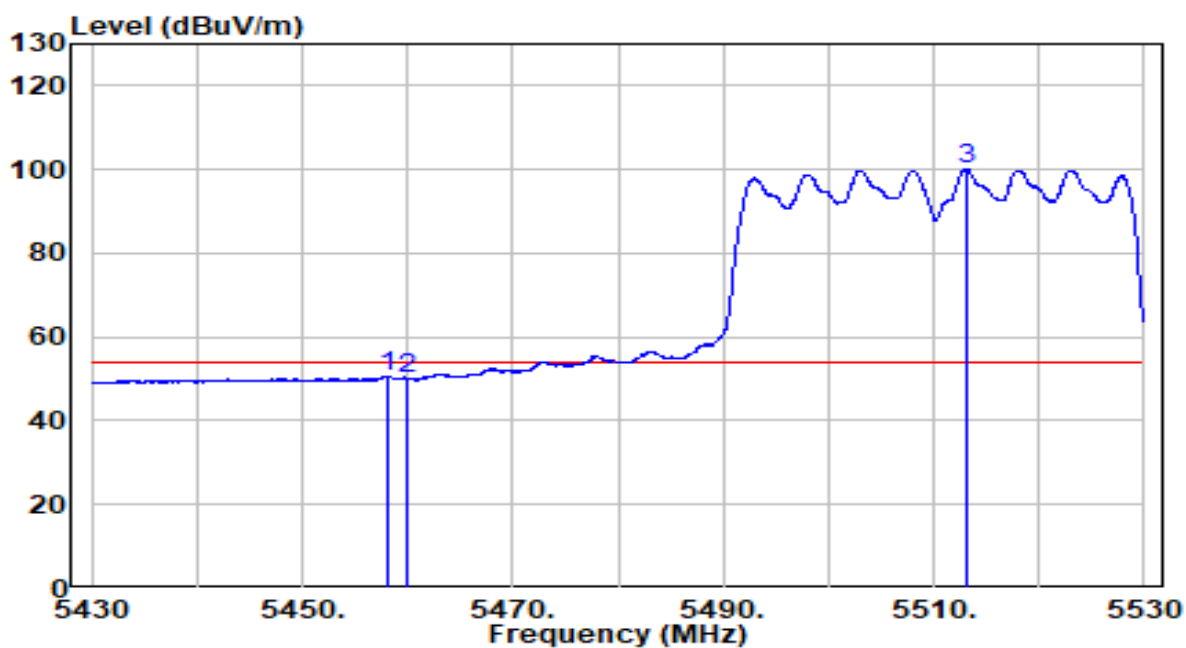


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.100	30.43	20.23	50.66	-3.34	54.00	Average
2	5460.000	29.83	20.23	50.06	-3.94	54.00	Average
3	* 5513.100	79.82	20.31	100.13	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

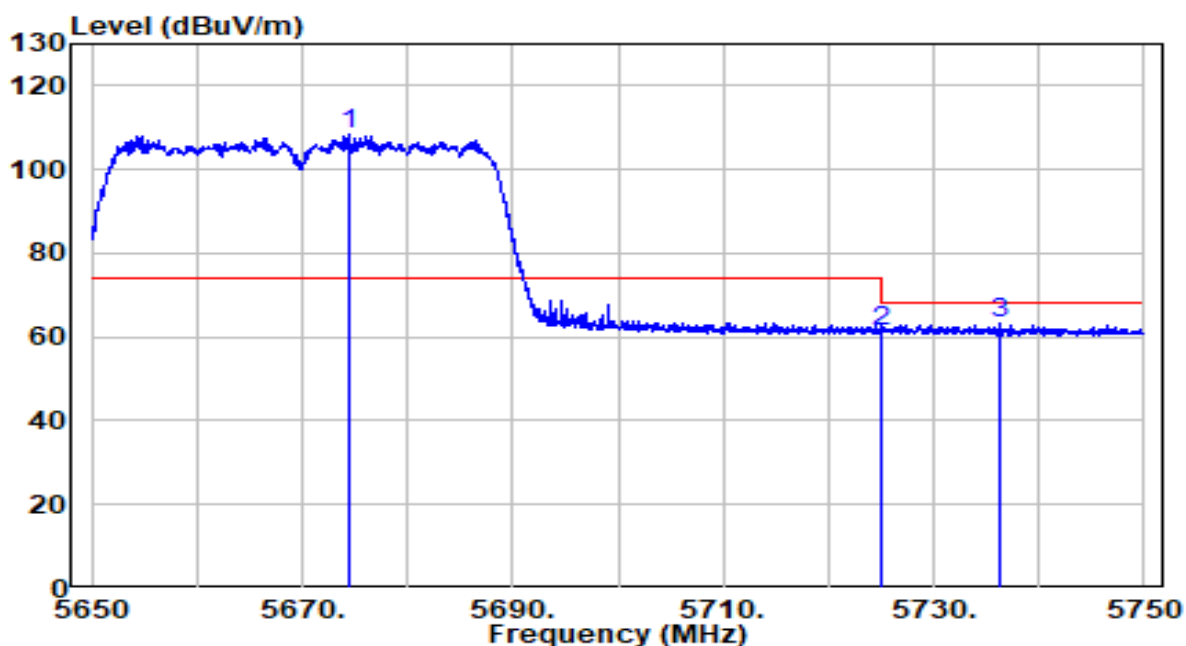


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5674.450	87.76	20.84	108.59	N/A	N/A	Peak
2		5725.000	40.44	21.00	61.43	-6.77	68.20	Peak
3		5736.350	42.04	21.04	63.07	-5.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

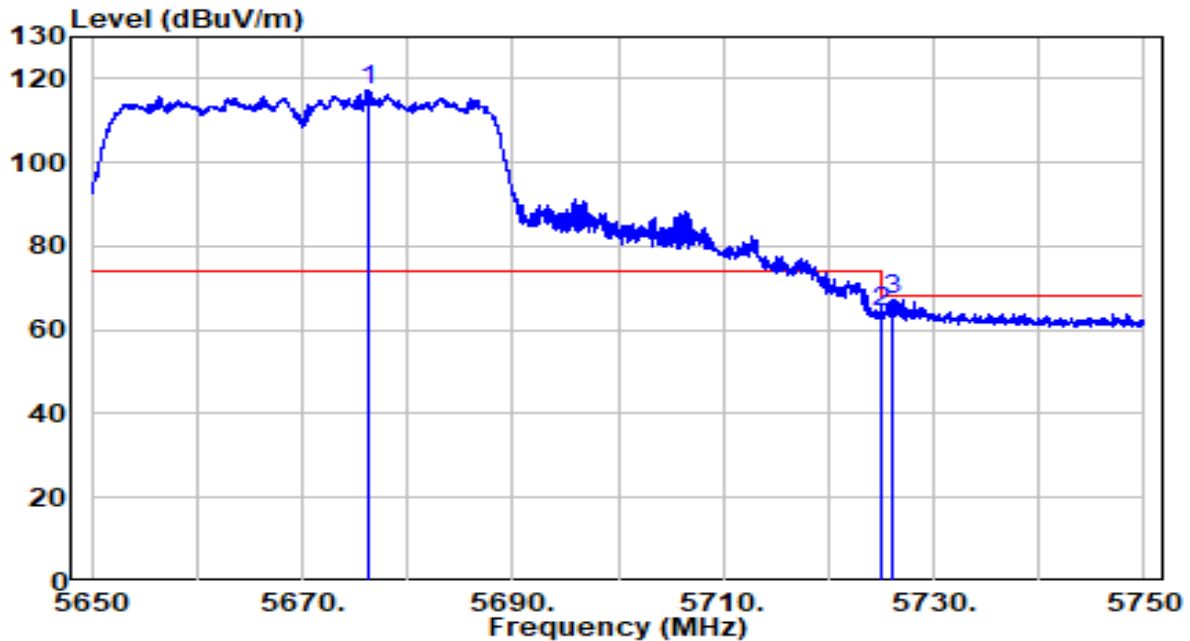


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5676.400	96.50	20.84	117.34	N/A	N/A	Peak
2		5725.000	43.14	21.00	64.14	-4.06	68.20	Peak
3		5726.100	46.31	21.00	67.31	-0.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

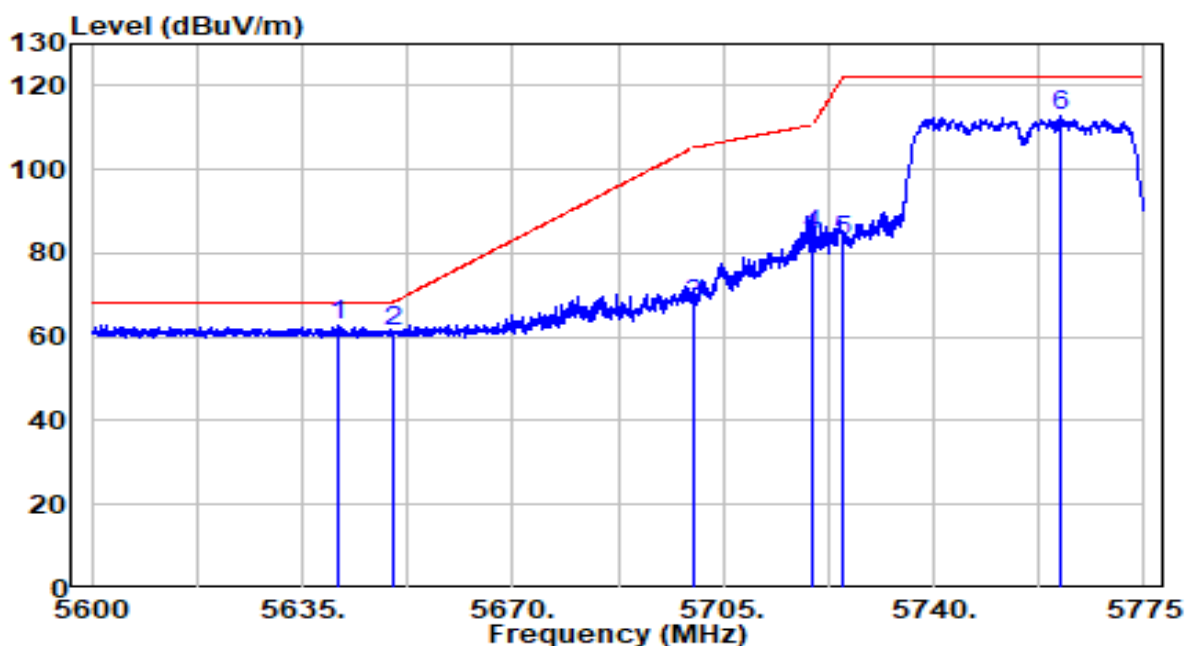


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5640.950	41.82	20.73	62.55	-5.65	68.20	Peak
2		5650.000	40.70	20.76	61.46	-6.74	68.20	Peak
3		5700.000	47.02	20.92	67.94	-37.26	105.20	Peak
4		5720.000	63.43	20.98	84.41	-26.39	110.80	Peak
5		5725.000	61.78	21.00	82.78	-39.42	122.20	Peak
6		5761.000	91.47	21.12	112.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

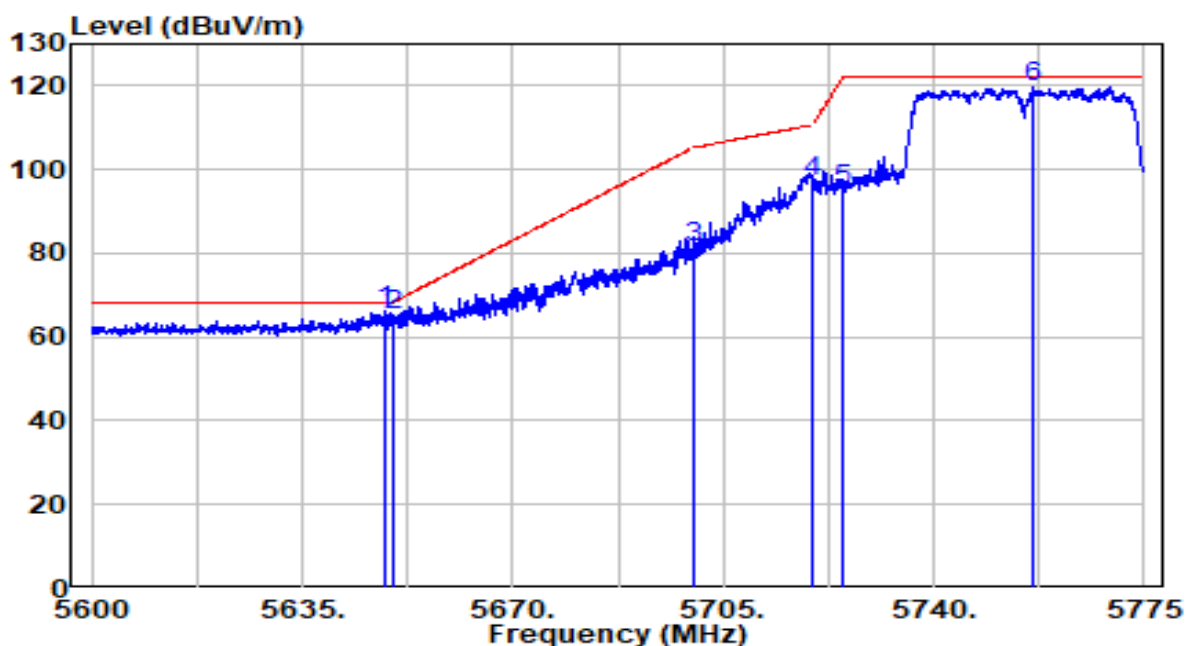


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5648.825	45.36	20.75	66.11	-2.09	68.20	Peak
2		5650.000	44.43	20.76	65.18	-3.02	68.20	Peak
3		5700.000	60.31	20.92	81.22	-23.98	105.20	Peak
4		5720.000	76.18	20.98	97.17	-13.63	110.80	Peak
5		5725.000	74.29	21.00	95.28	-26.92	122.20	Peak
6		5756.625	98.80	21.10	119.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

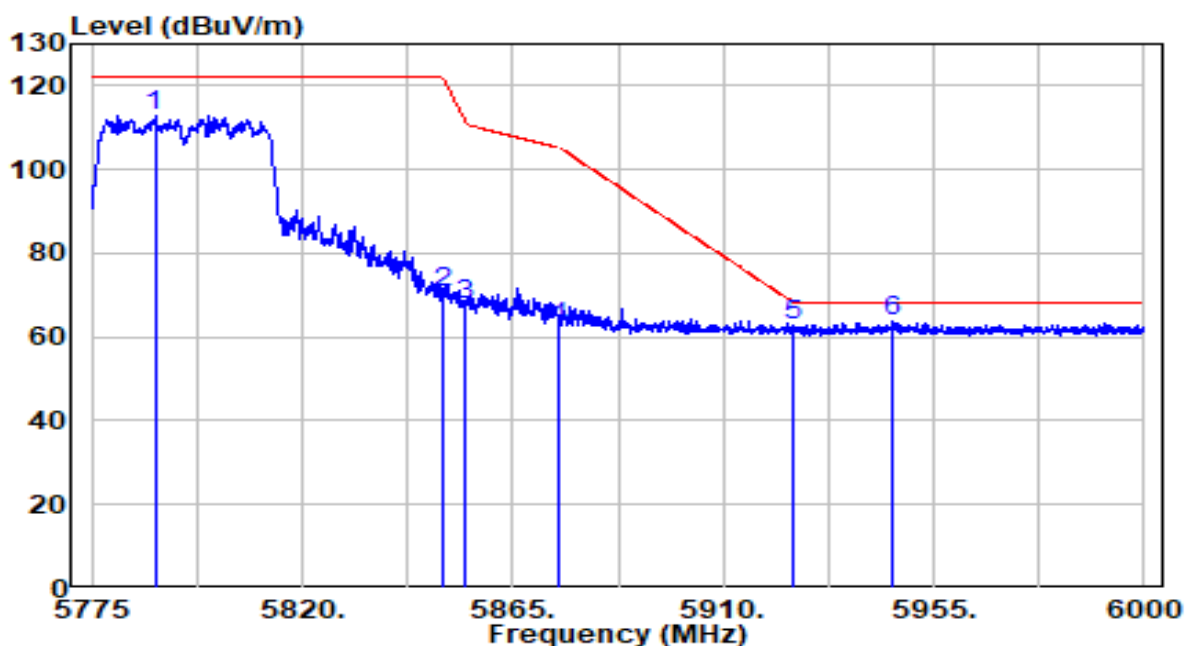


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5788.500	91.87	21.20	113.07	N/A	N/A	Peak
2	5850.000	49.33	21.40	70.73	-51.47	122.20	Peak
3	5855.000	46.04	21.42	67.46	-43.34	110.80	Peak
4	5875.000	41.02	21.49	62.50	-42.70	105.20	Peak
5	5925.000	41.11	21.65	62.76	-5.44	68.20	Peak
6	* 5946.112	42.22	21.72	63.94	-4.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

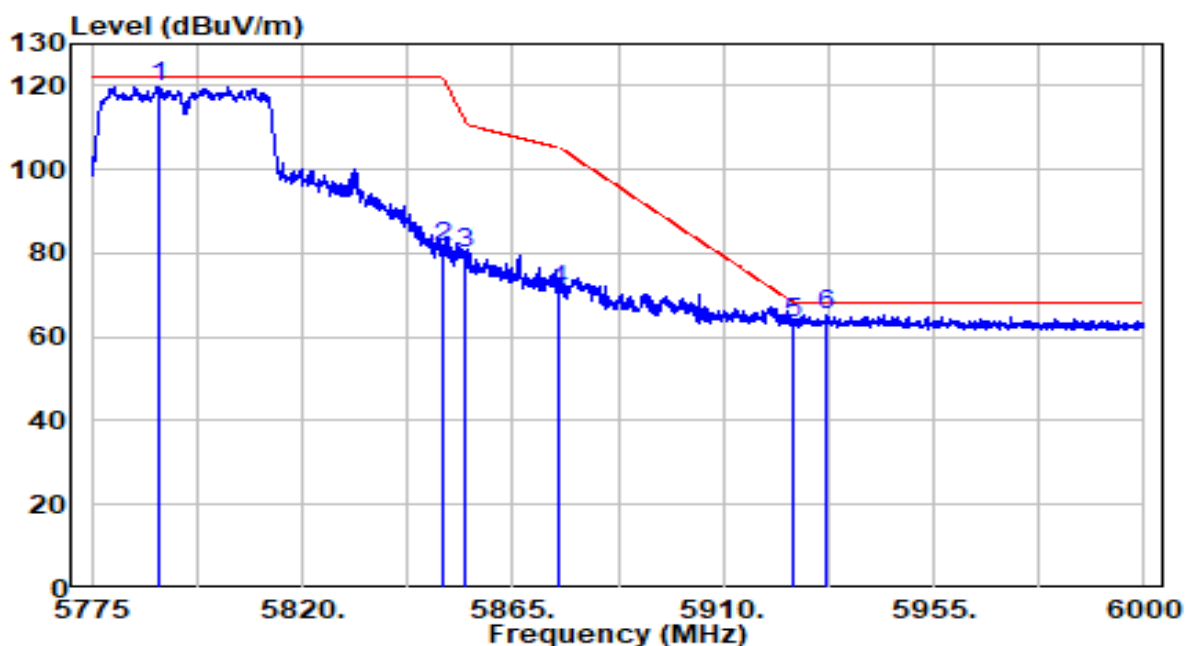


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5789.288	98.70	21.21	119.90	N/A	N/A	Peak
2		5850.000	60.02	21.40	81.43	-40.77	122.20	Peak
3		5855.000	58.35	21.42	79.77	-31.03	110.80	Peak
4		5875.000	49.55	21.49	71.03	-34.17	105.20	Peak
5		5925.000	41.45	21.65	63.10	-5.10	68.20	Peak
6		5931.938	43.43	21.67	65.09	-3.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

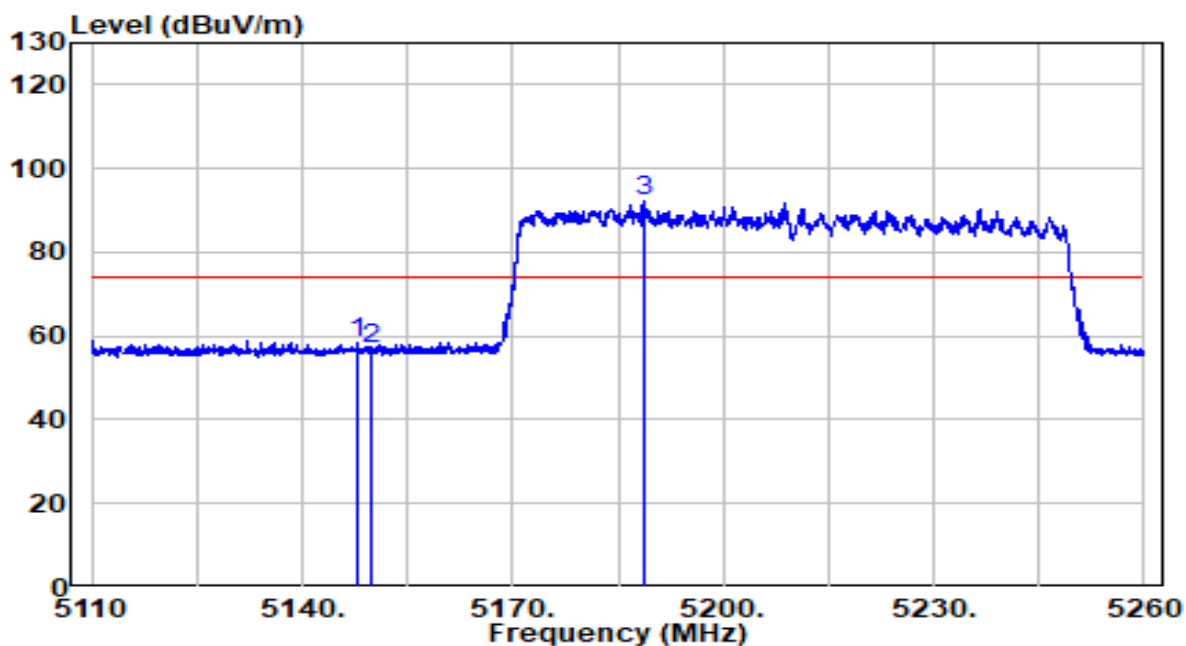


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.025	38.39	19.90	58.30	-15.70	74.00	Peak
2	5150.000	36.78	19.91	56.69	-17.31	74.00	Peak
3	* 5188.600	72.38	19.95	92.32	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

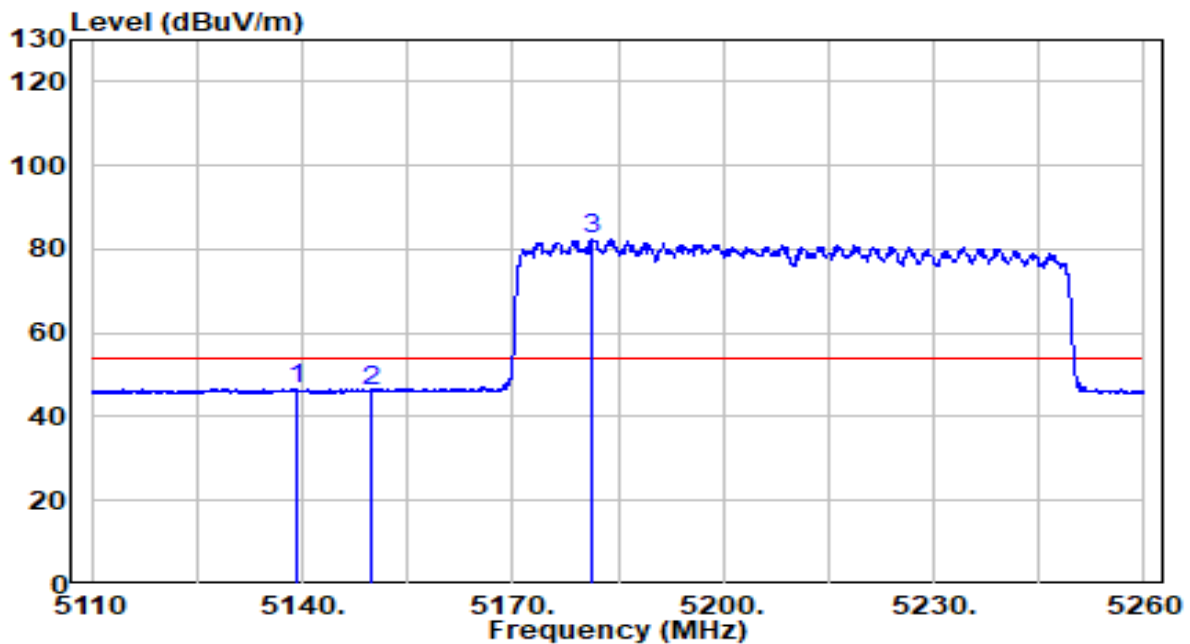


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5139.325	26.66	19.89	46.55	-7.45	54.00	Average
2	5150.000	26.42	19.91	46.33	-7.67	54.00	Average
3	* 5181.250	62.59	19.94	82.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

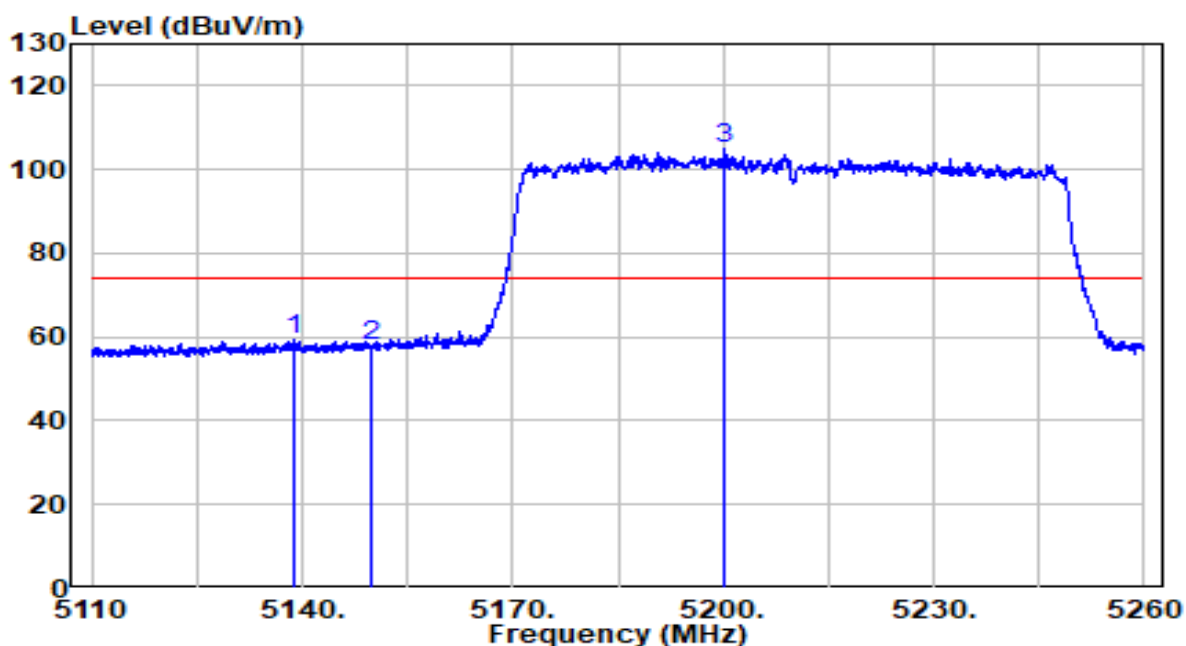


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5138.800	39.41	19.89	59.31	-14.69	74.00	Peak
2	5150.000	38.22	19.91	58.12	-15.88	74.00	Peak
3	* 5200.225	85.17	19.96	105.13	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

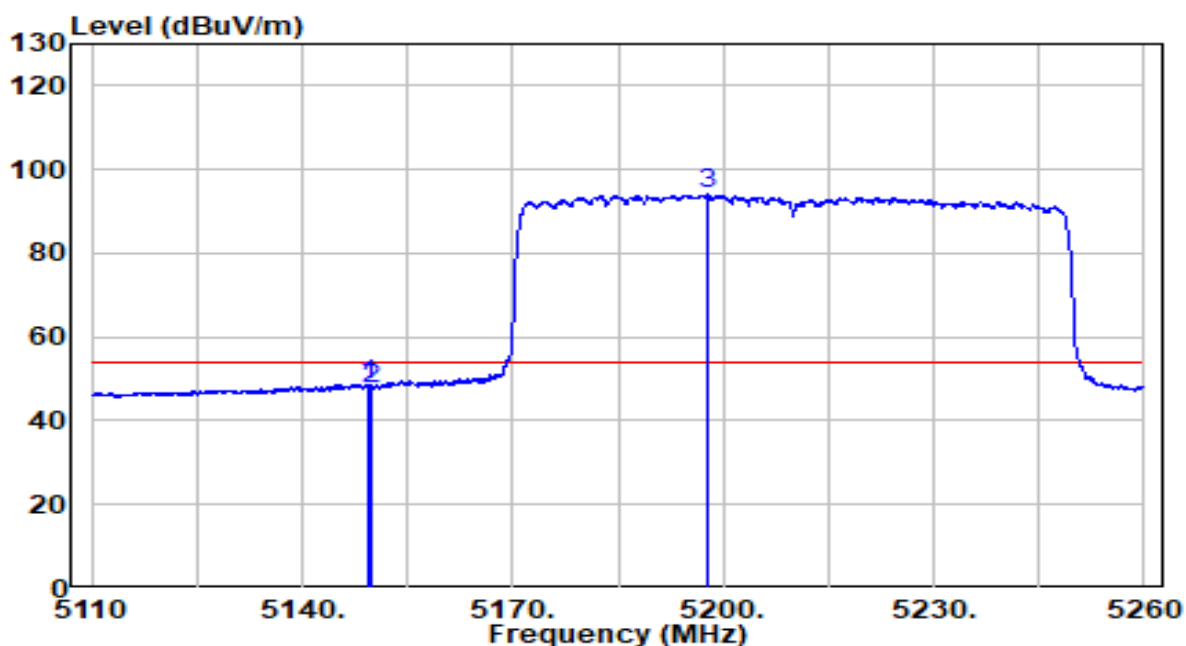


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.525	28.90	19.91	48.81	-5.19	54.00	Average
2	5150.000	27.76	19.91	47.67	-6.33	54.00	Average
3	* 5197.675	74.06	19.96	94.02	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

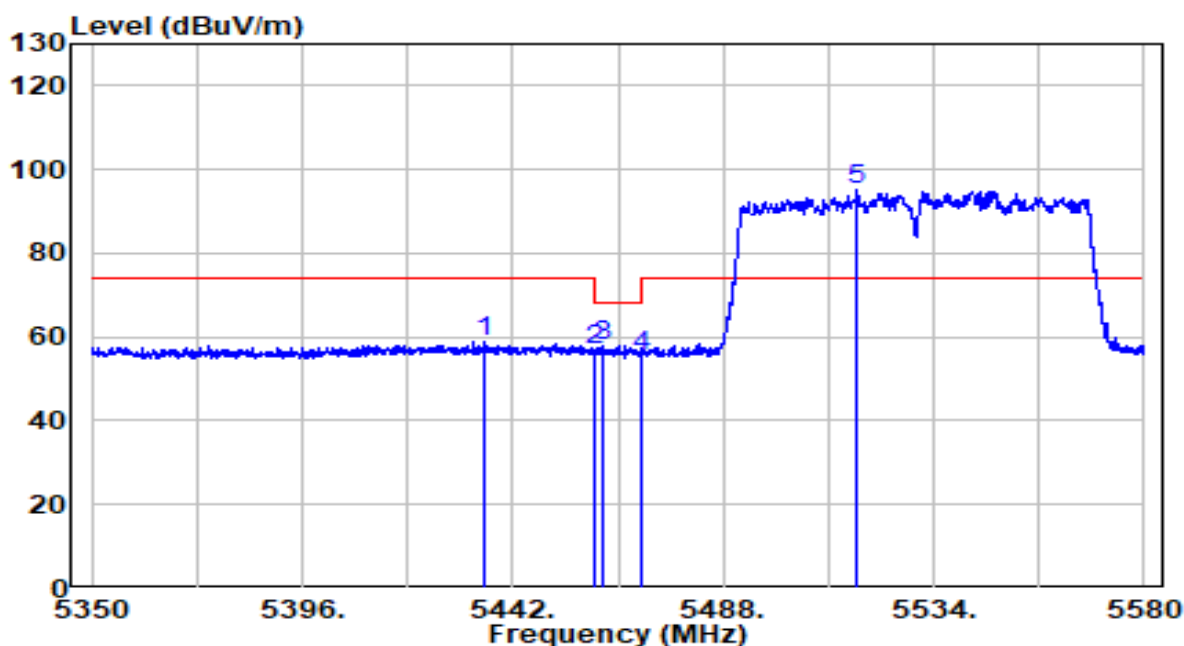


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5436.020	38.63	20.20	58.83	-15.17	74.00	Peak
2	5460.000	36.70	20.23	56.93	-11.27	68.20	Peak
3	5461.435	37.44	20.23	57.67	-10.53	68.20	Peak
4	5470.000	35.29	20.24	55.53	-12.67	68.20	Peak
5	* 5517.325	74.63	20.33	94.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

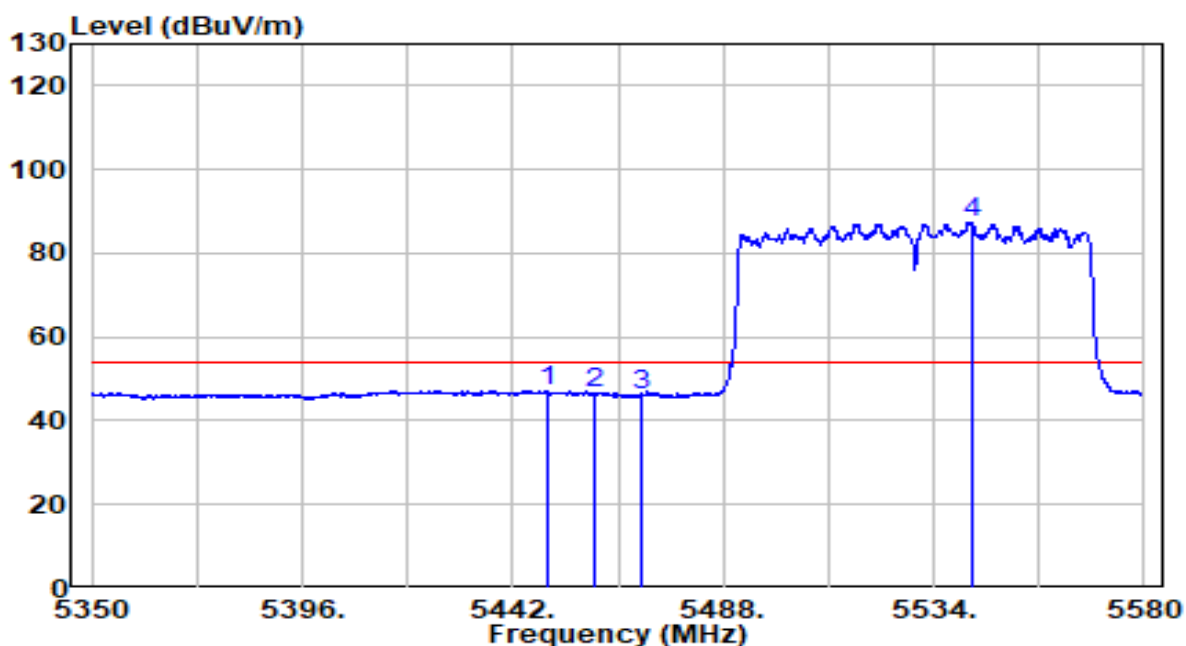


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.590	27.01	20.22	47.22	-6.78	54.00	Average
2	5460.000	26.15	20.23	46.37	-7.63	54.00	Average
3	5470.000	25.88	20.24	46.12	-7.88	54.00	Average
4	* 5542.280	67.14	20.41	87.55	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

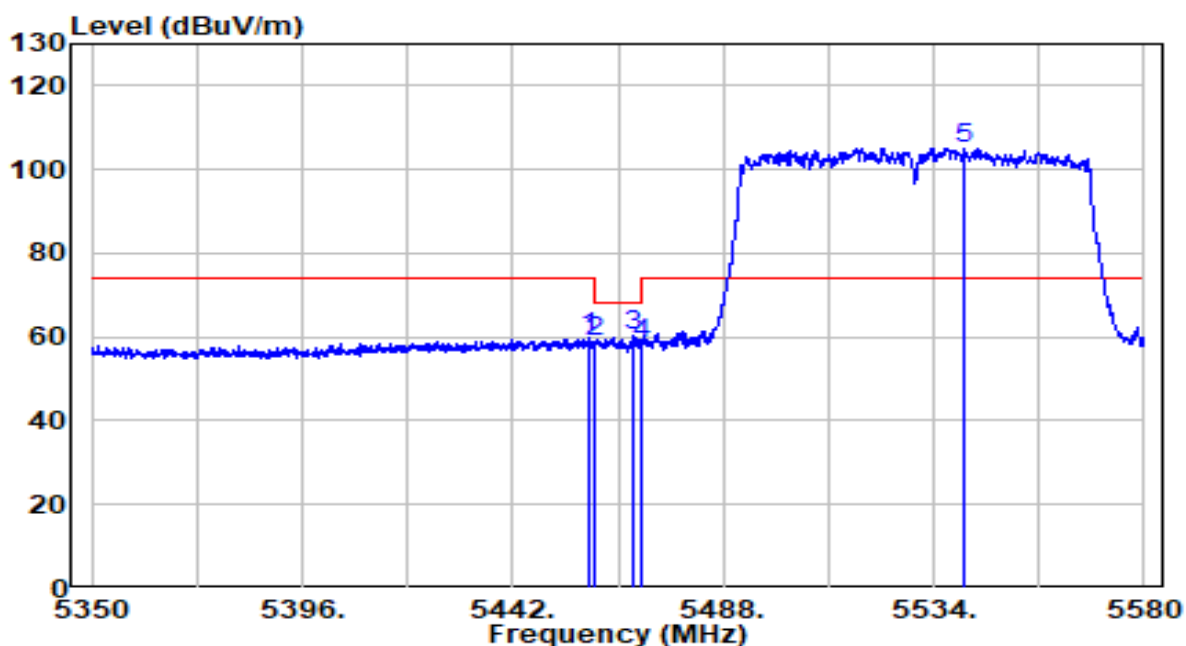


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.905	39.65	20.23	59.88	-14.12	74.00	Peak
2	5460.000	38.57	20.23	58.80	-9.40	68.20	Peak
3	5468.450	39.97	20.24	60.21	-7.99	68.20	Peak
4	5470.000	38.30	20.24	58.54	-9.66	68.20	Peak
5	* 5540.555	84.78	20.40	105.18	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

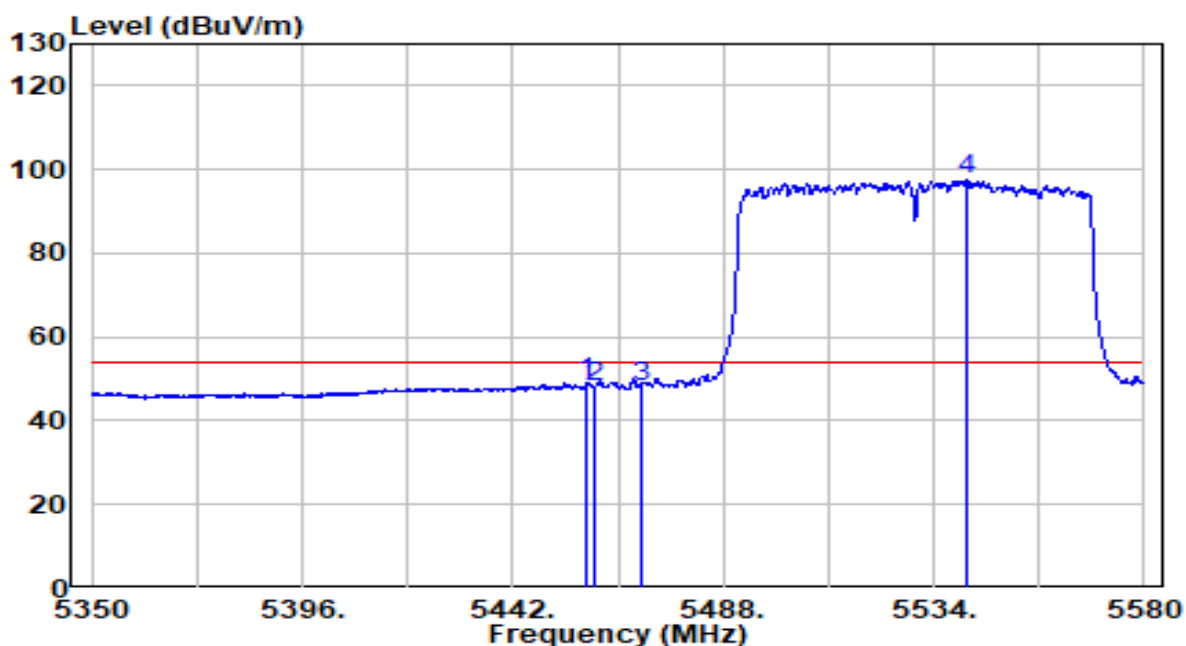


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.330	28.92	20.23	49.15	-4.85	54.00	Average
2	5460.000	28.03	20.23	48.26	-5.74	54.00	Average
3	5470.000	27.85	20.24	48.09	-5.91	54.00	Average
4	* 5541.245	77.08	20.40	97.49	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

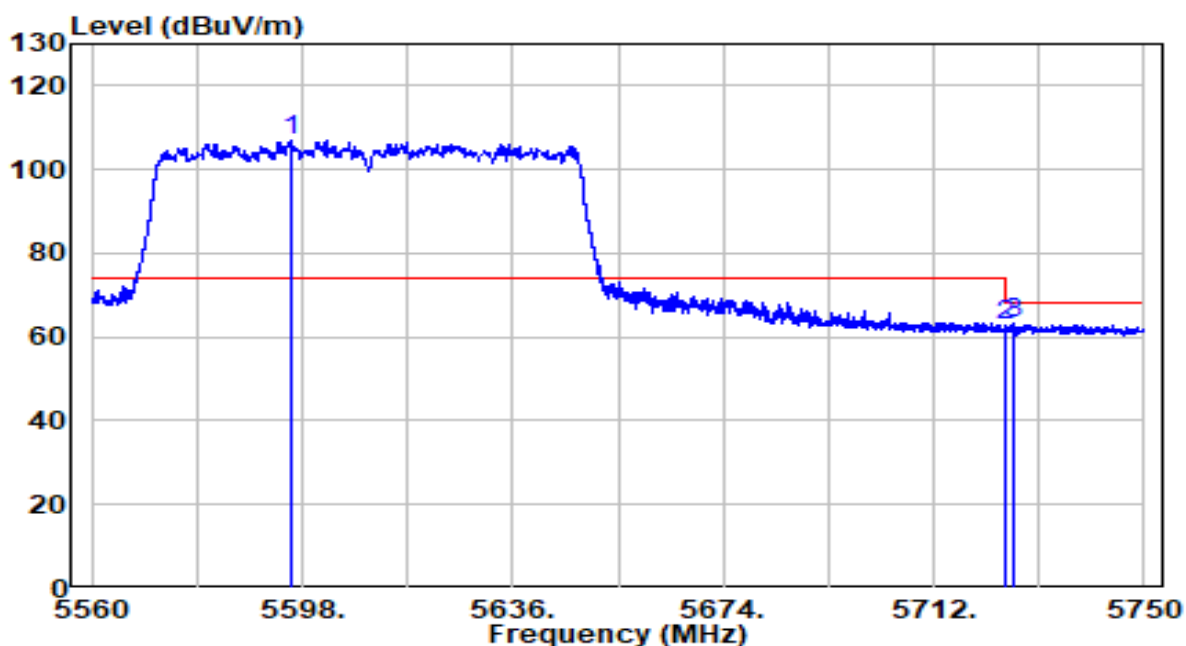


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5595.815	86.36	20.58	106.94	N/A	N/A	Peak
2		5725.000	41.97	21.00	62.97	-5.23	68.20	Peak
3		5726.535	42.38	21.00	63.39	-4.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

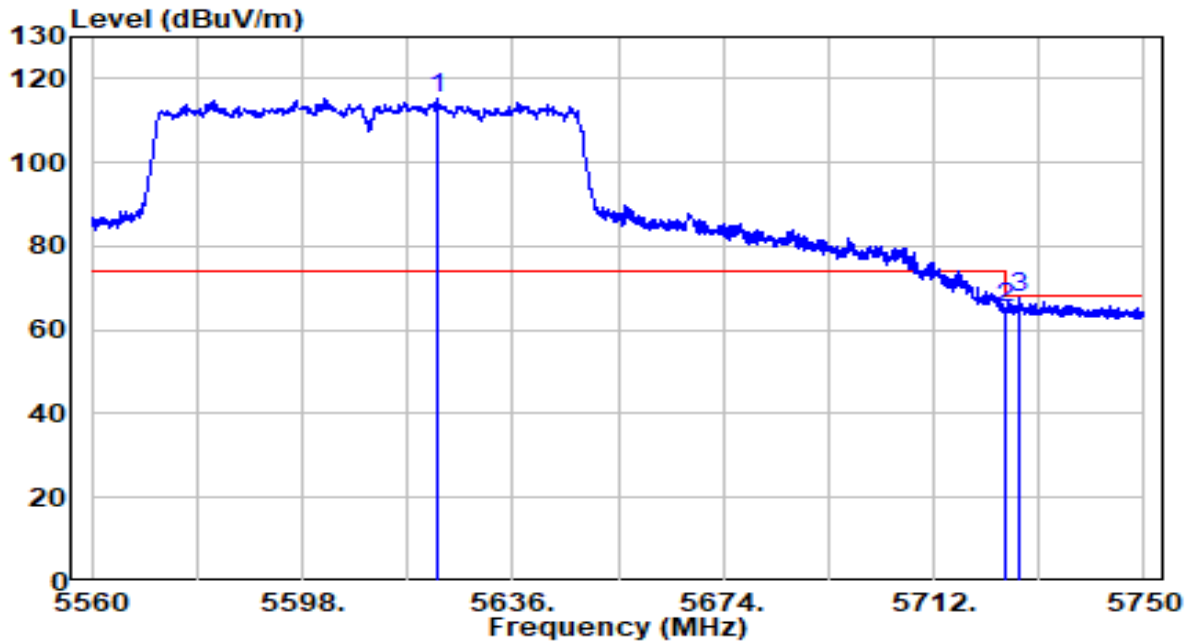


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5622.225	94.49	20.67	115.16	N/A	N/A	Peak
2		5725.000	44.17	21.00	65.17	-3.03	68.20	Peak
3		5727.580	46.48	21.01	67.49	-0.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

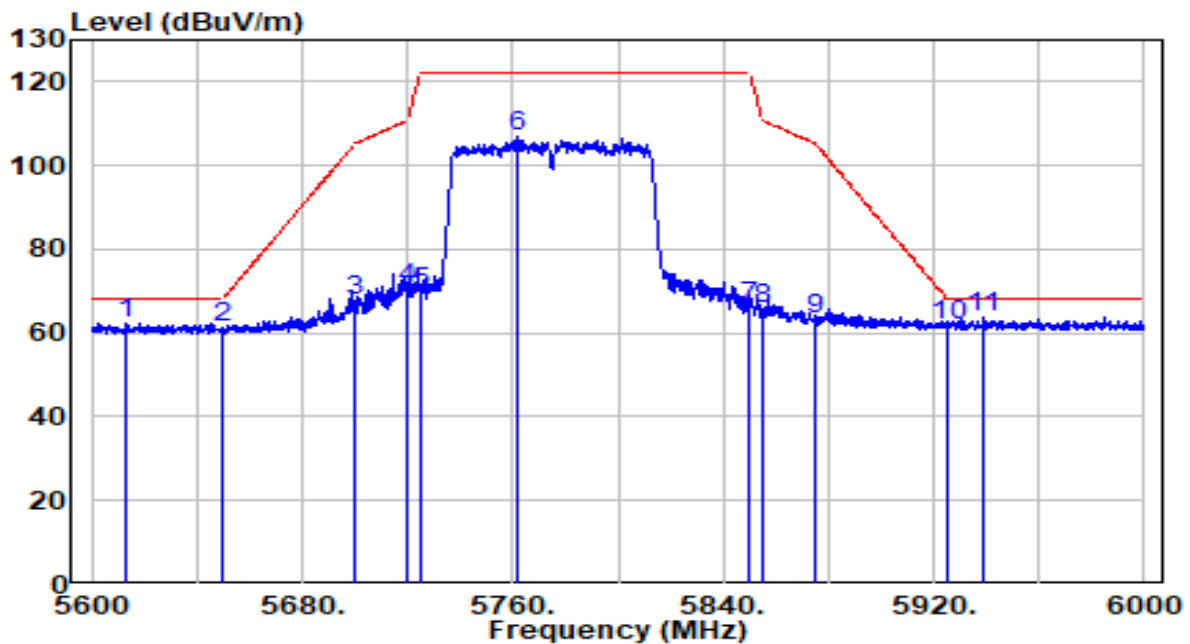


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5613.400	41.86	20.64	62.49	-5.71	68.20	Peak
2	5650.000	40.57	20.76	61.33	-6.87	68.20	Peak
3	5700.000	46.85	20.92	67.77	-37.43	105.20	Peak
4	5720.000	49.73	20.98	70.71	-40.09	110.80	Peak
5	5725.000	48.54	21.00	69.54	-52.66	122.20	Peak
6	5762.000	86.03	21.12	107.15	N/A	N/A	Peak
7	5850.000	44.72	21.40	66.13	-56.07	122.20	Peak
8	5855.000	44.07	21.42	65.49	-45.31	110.80	Peak
9	5875.000	41.87	21.49	63.35	-41.85	105.20	Peak
10	5925.000	40.36	21.65	62.01	-6.19	68.20	Peak
11	* 5938.800	42.05	21.69	63.75	-4.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. $C.F \text{ (Correction Factor)} = \text{Antenna Factor (dB)} + \text{Cable Loss (dB)} - \text{Preamplifier (dB)}$.
3. $\text{Measurement (dBuV/m)} = \text{Reading (dBuV)} + C.F \text{ (Correction Factor)}$.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

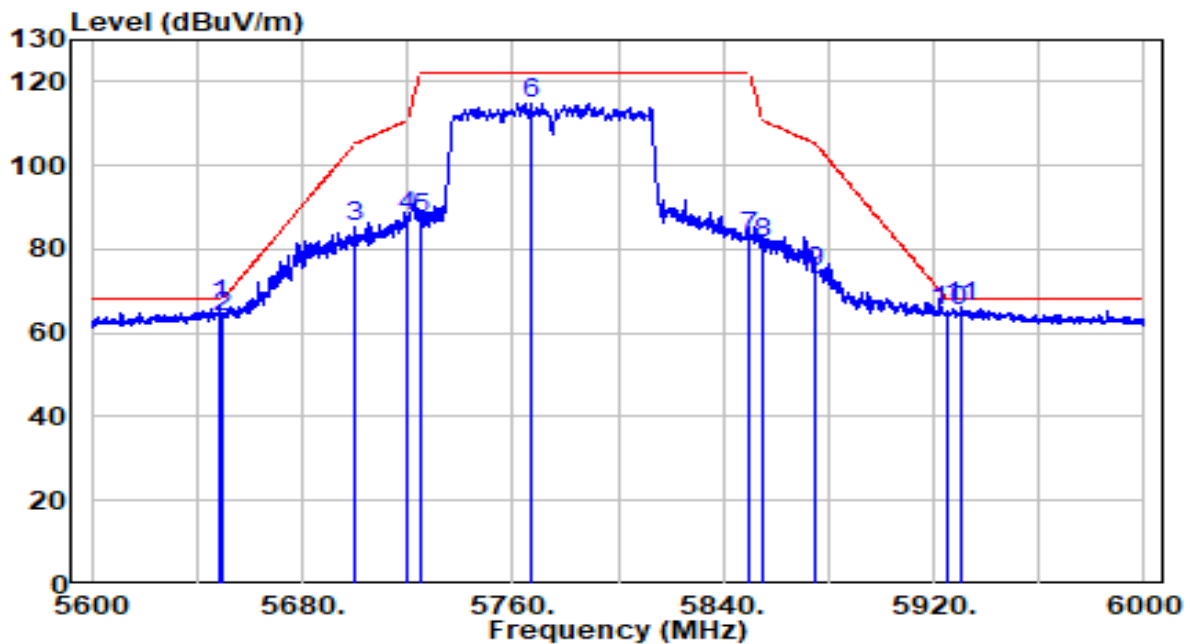


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5649.000	46.01	20.75	66.76	-1.44	68.20	Peak
2		5650.000	43.04	20.76	63.80	-4.40	68.20	Peak
3		5700.000	64.26	20.92	85.18	-20.02	105.20	Peak
4		5720.000	67.06	20.98	88.04	-22.76	110.80	Peak
5		5725.000	66.43	21.00	87.43	-34.77	122.20	Peak
6		5767.400	93.82	21.14	114.96	N/A	N/A	Peak
7		5850.000	61.40	21.40	82.80	-39.40	122.20	Peak
8		5855.000	59.80	21.42	81.22	-29.58	110.80	Peak
9		5875.000	52.93	21.49	74.42	-30.78	105.20	Peak
10		5925.000	43.51	21.65	65.16	-3.04	68.20	Peak
11		5930.400	44.42	21.66	66.08	-2.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	23.5°C/29.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

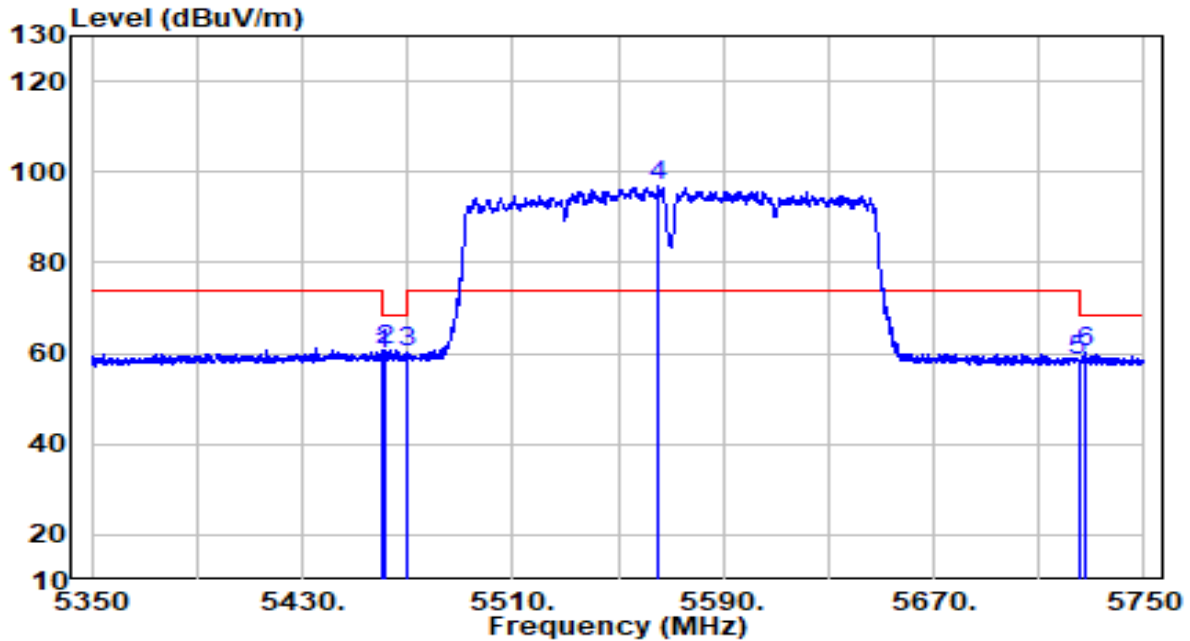


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	39.49	20.23	59.72	-8.48	68.20	Peak
2	5461.800	40.58	20.23	60.81	-7.39	68.20	Peak
3	5470.000	39.98	20.24	60.22	-7.98	68.20	Peak
4	* 5565.600	76.24	20.48	96.72	N/A	N/A	Peak
5	5725.000	37.24	21.00	58.24	-9.96	68.20	Peak
6	5727.400	39.34	21.01	60.35	-7.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	23.5°C/29.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

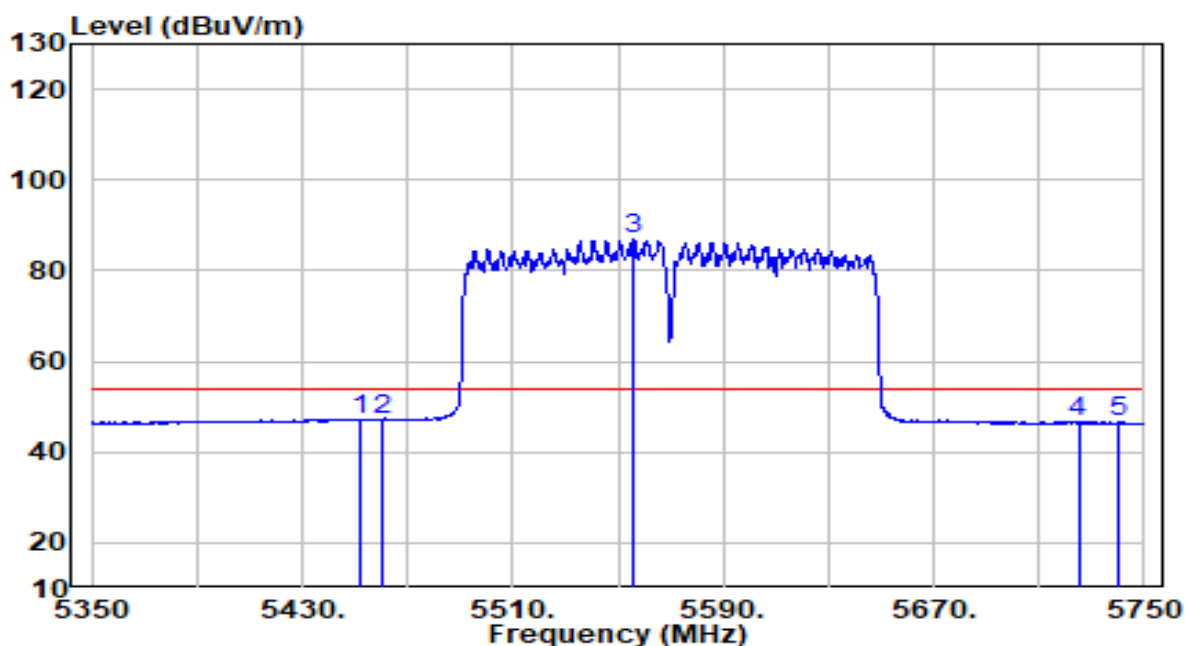


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.400	27.13	20.22	47.35	-6.65	54.00	Average
2	5460.000	26.88	20.23	47.11	-6.89	54.00	Average
3	* 5555.600	66.64	20.45	87.09	N/A	N/A	Average
4	5725.000	25.46	21.00	46.46	-7.54	54.00	Average
5	5740.200	25.69	21.05	46.74	-7.26	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	23.5°C/29.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

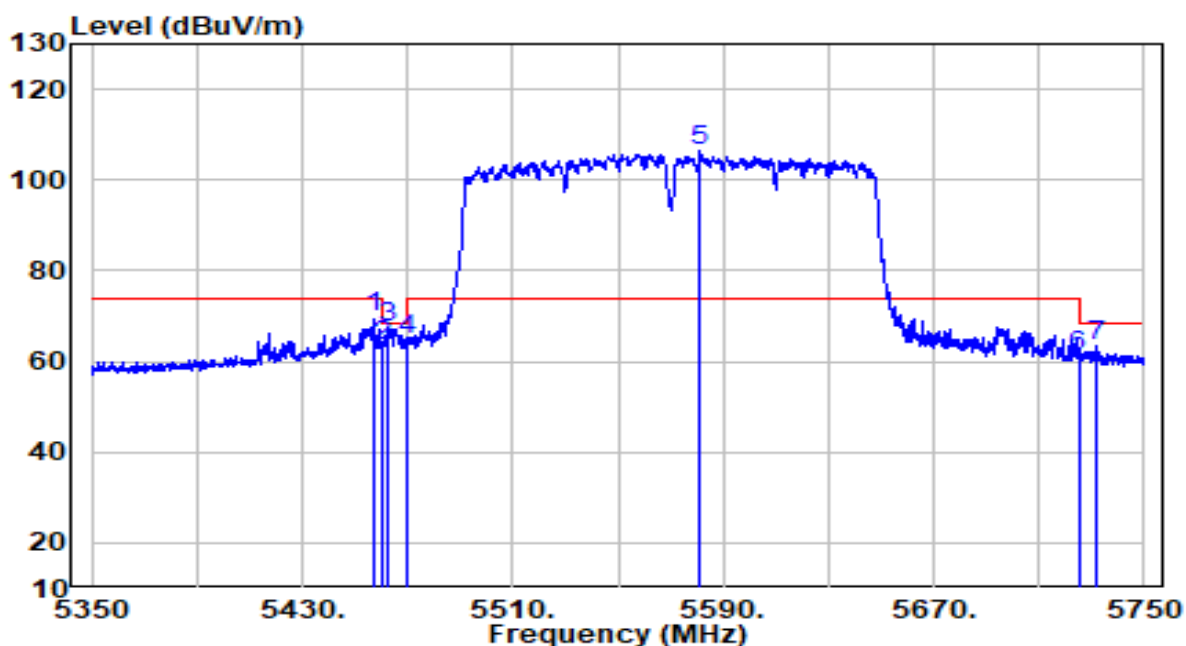


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.000	49.32	20.23	69.55	-4.45	74.00	Peak
2	5460.000	43.27	20.23	63.50	-4.70	68.20	Peak
3	5462.800	47.19	20.23	67.42	-0.78	68.20	Peak
4	5470.000	44.49	20.24	64.73	-3.47	68.20	Peak
5 *	5581.400	85.99	20.53	106.52	N/A	N/A	Peak
6	5725.000	40.23	21.00	61.23	-6.97	68.20	Peak
7	5731.400	42.48	21.02	63.50	-4.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	23.5°C/29.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

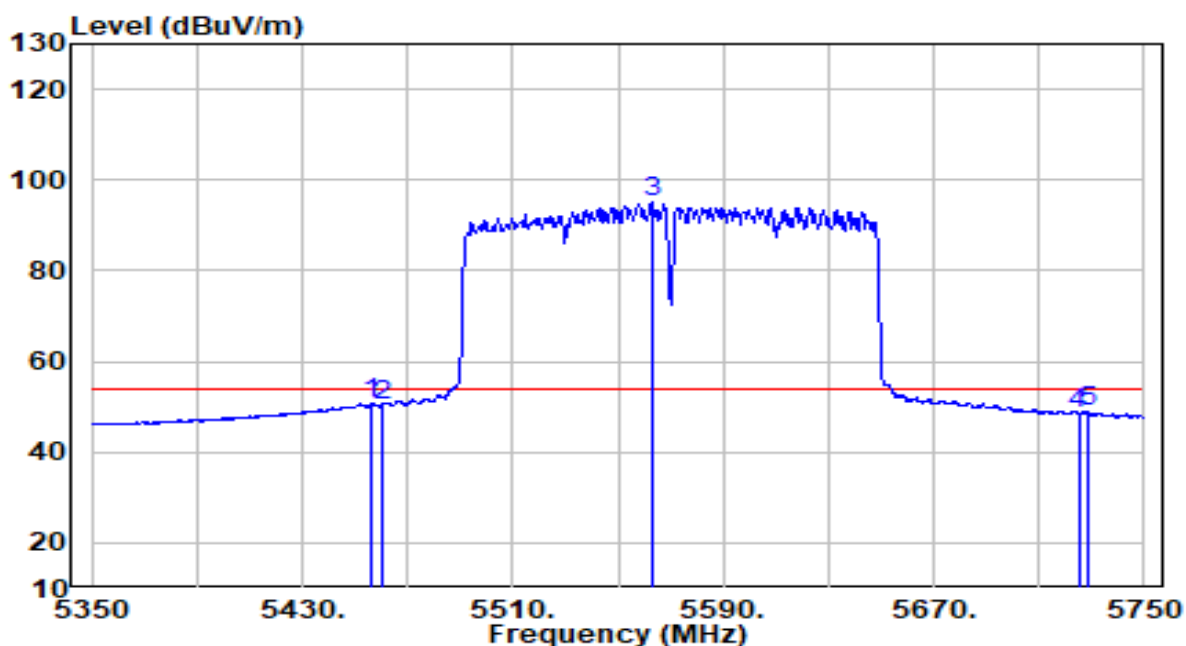


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.400	30.49	20.22	50.71	-3.29	54.00	Average
2	5460.000	29.99	20.23	50.22	-3.78	54.00	Average
3	* 5562.800	74.45	20.47	94.92	N/A	N/A	Average
4	5725.000	27.36	21.00	48.36	-5.64	54.00	Average
5	5728.200	27.83	21.01	48.84	-5.16	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

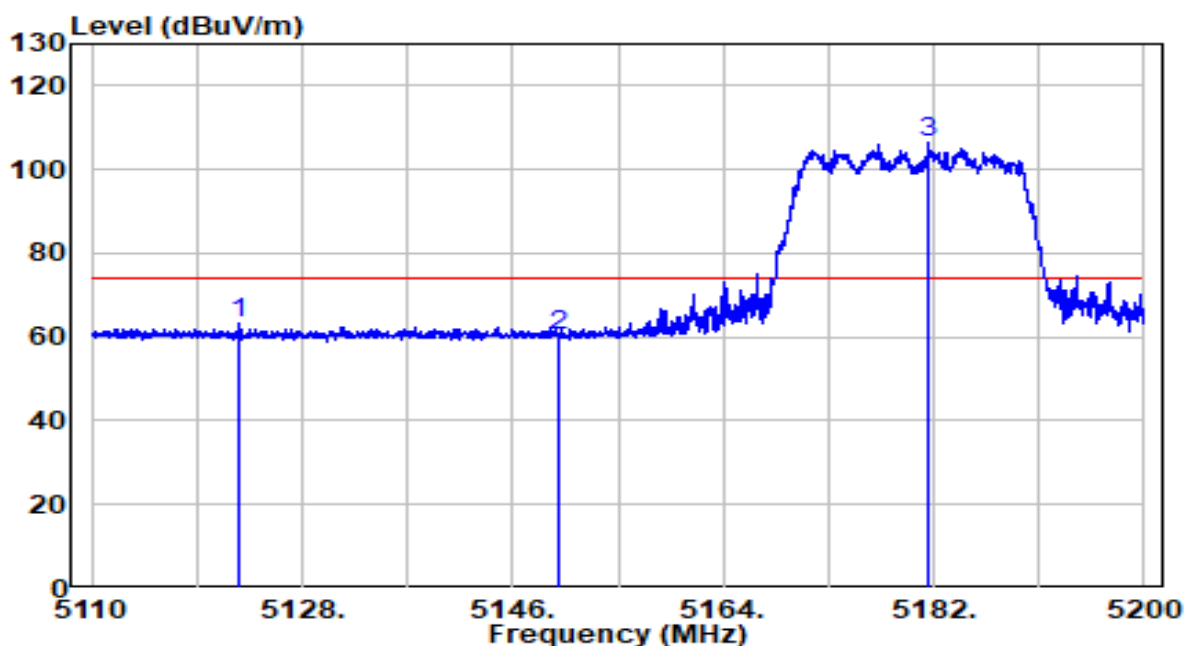


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5122.690	43.21	19.88	63.09	-10.91	74.00	Peak
2	5150.000	40.49	19.91	60.39	-13.61	74.00	Peak
3	* 5181.505	86.57	19.94	106.50	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

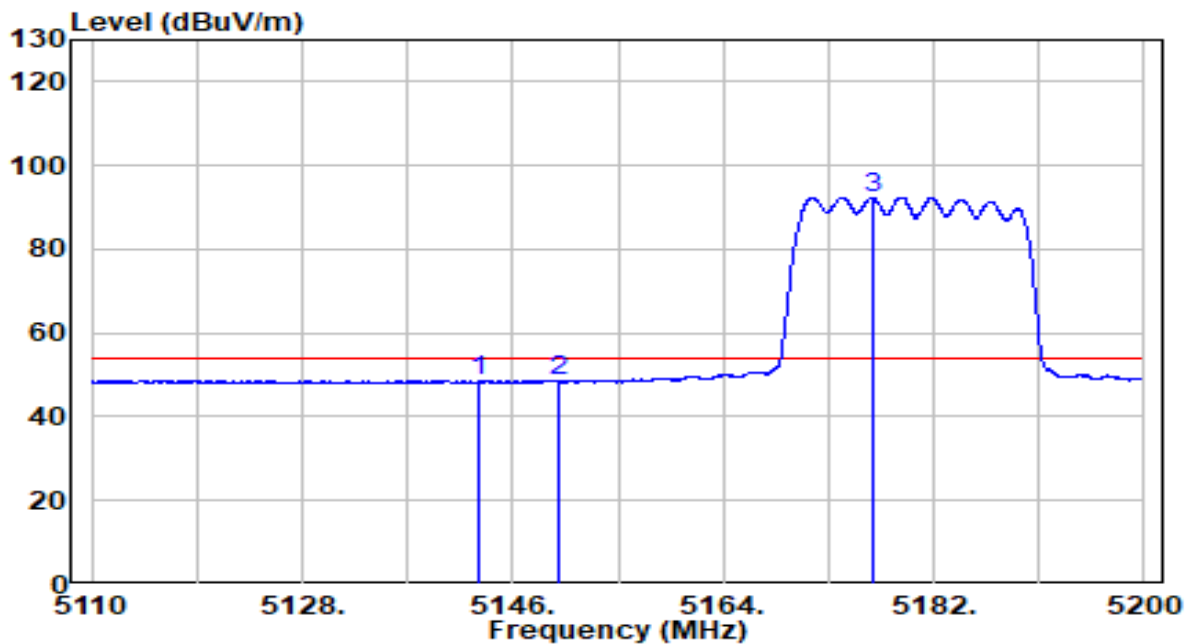


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.165	28.77	19.90	48.67	-5.33	54.00	Average
2	5150.000	28.62	19.91	48.53	-5.47	54.00	Average
3	* 5176.780	72.52	19.93	92.45	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

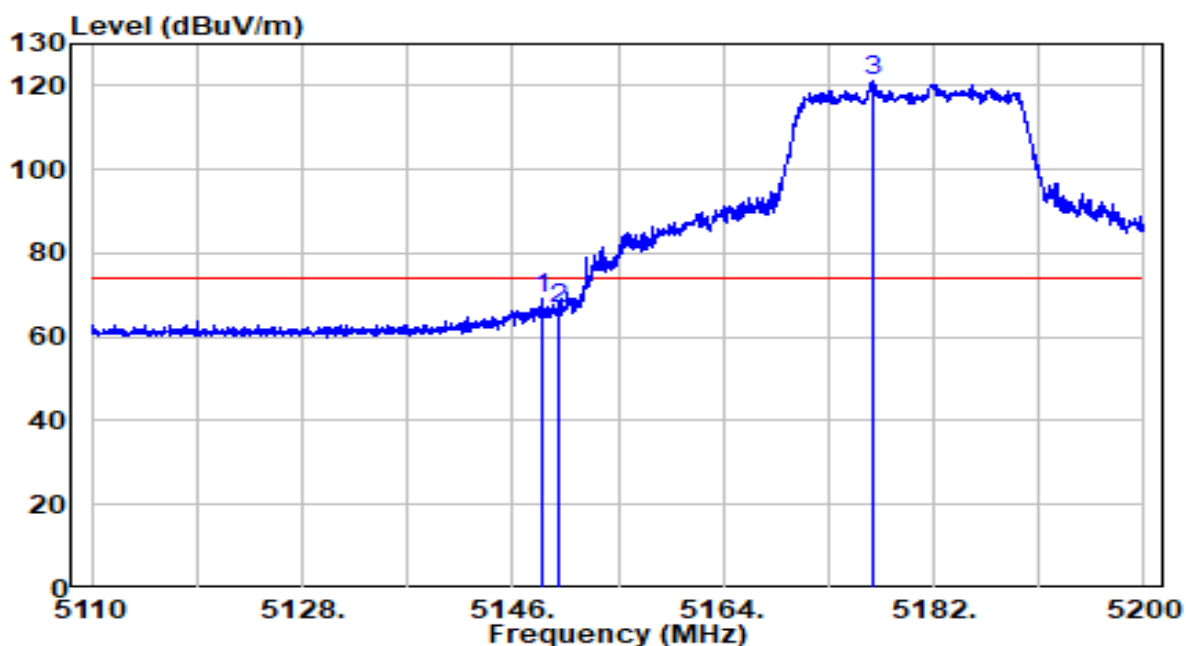


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.475	49.04	19.90	68.94	-5.06	74.00	Peak
2	5150.000	46.73	19.91	66.63	-7.37	74.00	Peak
3	* 5176.825	101.19	19.93	121.12	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

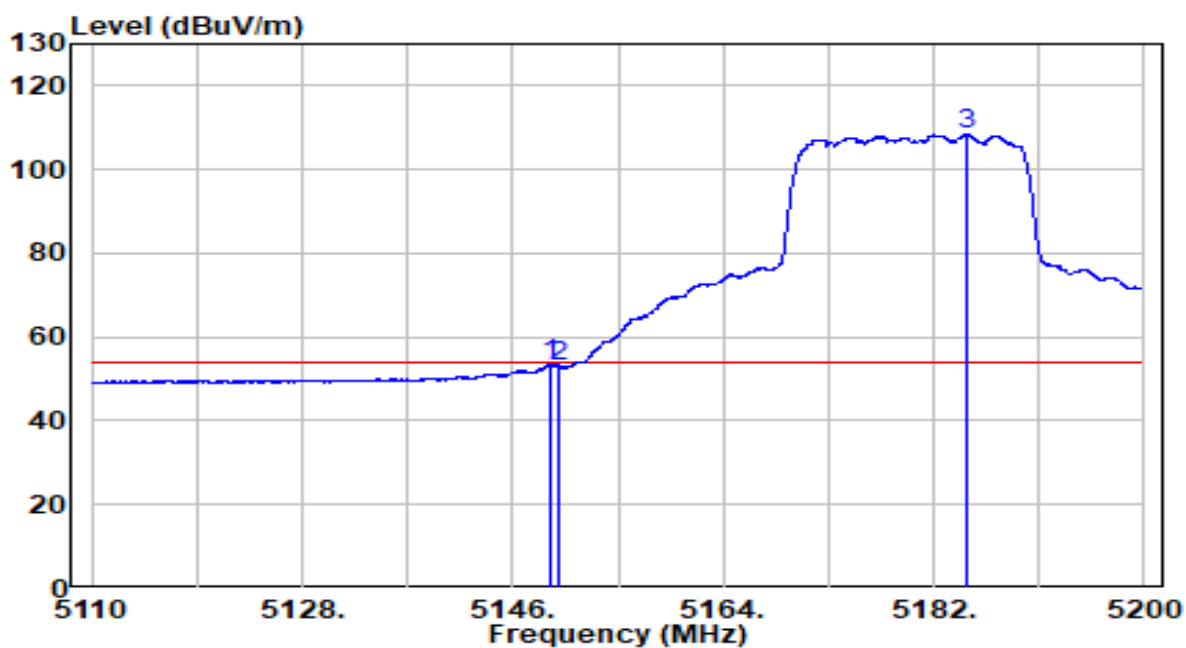


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.150	33.52	19.91	53.42	-0.58	54.00	Average
2	5150.000	33.13	19.91	53.04	-0.96	54.00	Average
3	* 5184.880	88.37	19.94	108.31	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

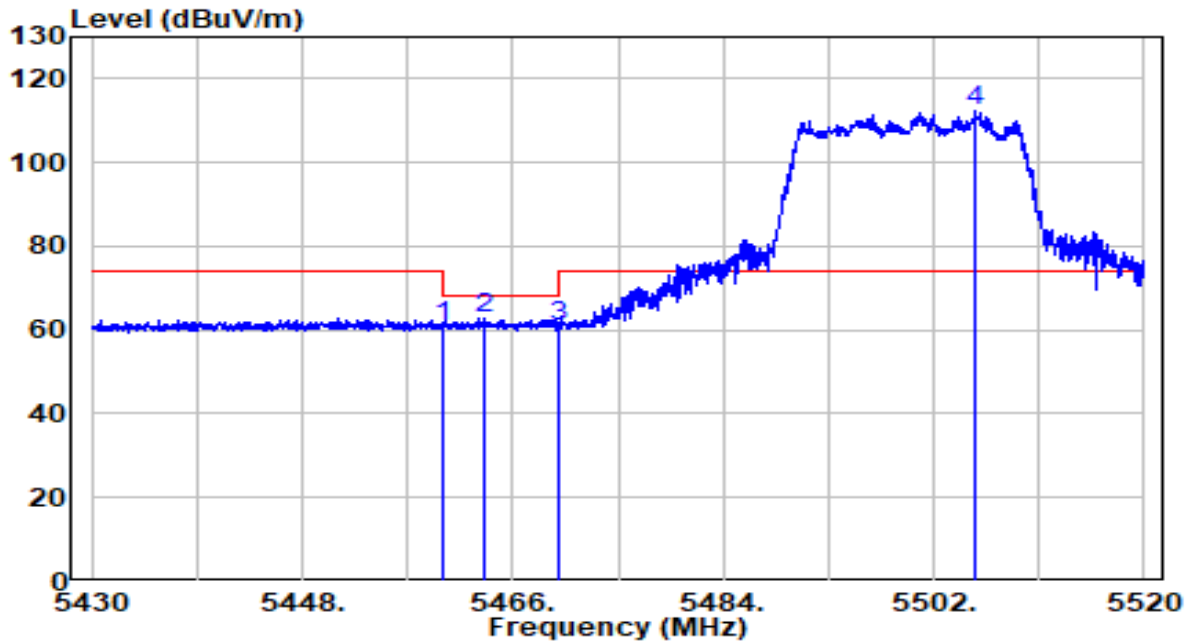


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.73	20.23	60.96	-7.24	68.20	Peak
2	5463.615	42.73	20.23	62.96	-5.24	68.20	Peak
3	5470.000	40.45	20.24	60.69	-7.51	68.20	Peak
4	* 5505.510	92.17	20.29	112.46	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

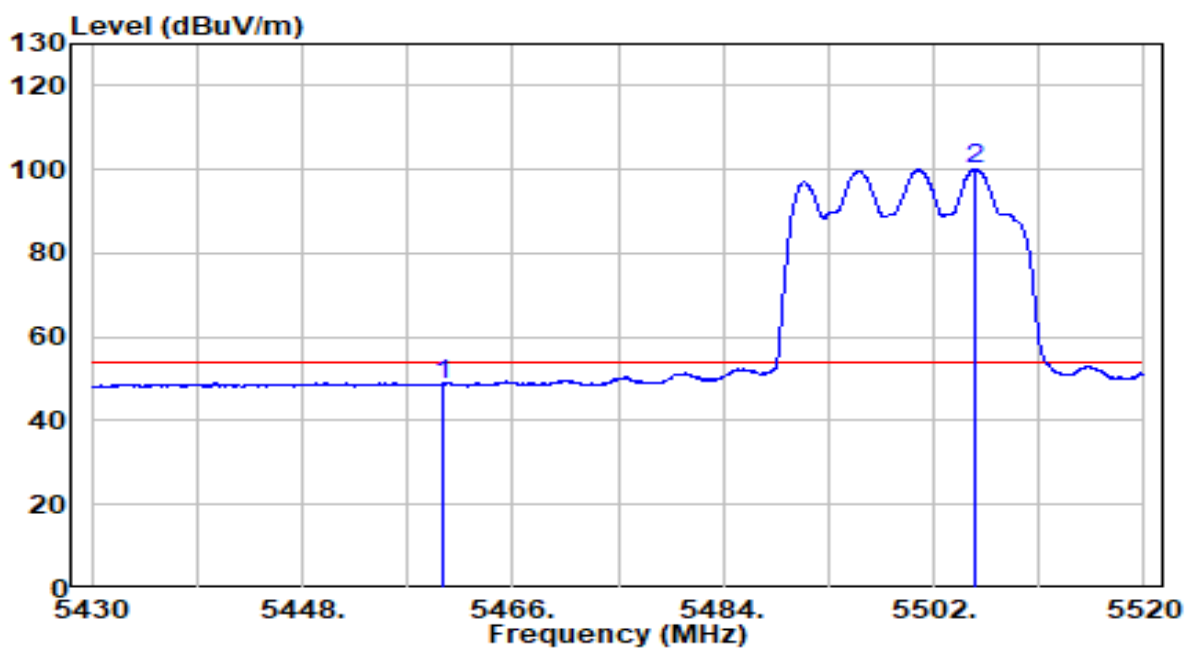


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.56	20.23	48.79	-5.21	54.00	Average
2	* 5505.510	79.79	20.29	100.08	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

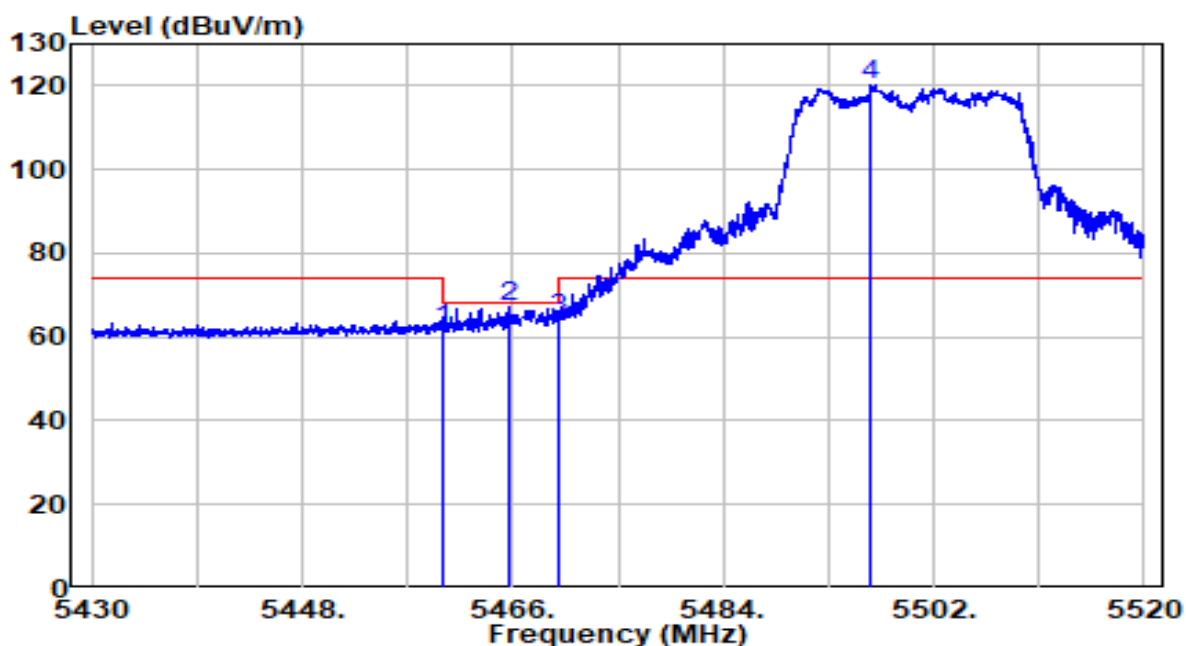


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.80	20.23	62.03	-6.17	68.20	Peak
2	5465.685	47.06	20.23	67.29	-0.91	68.20	Peak
3	5470.000	43.92	20.24	64.16	-4.04	68.20	Peak
4	* 5496.690	99.94	20.27	120.21	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

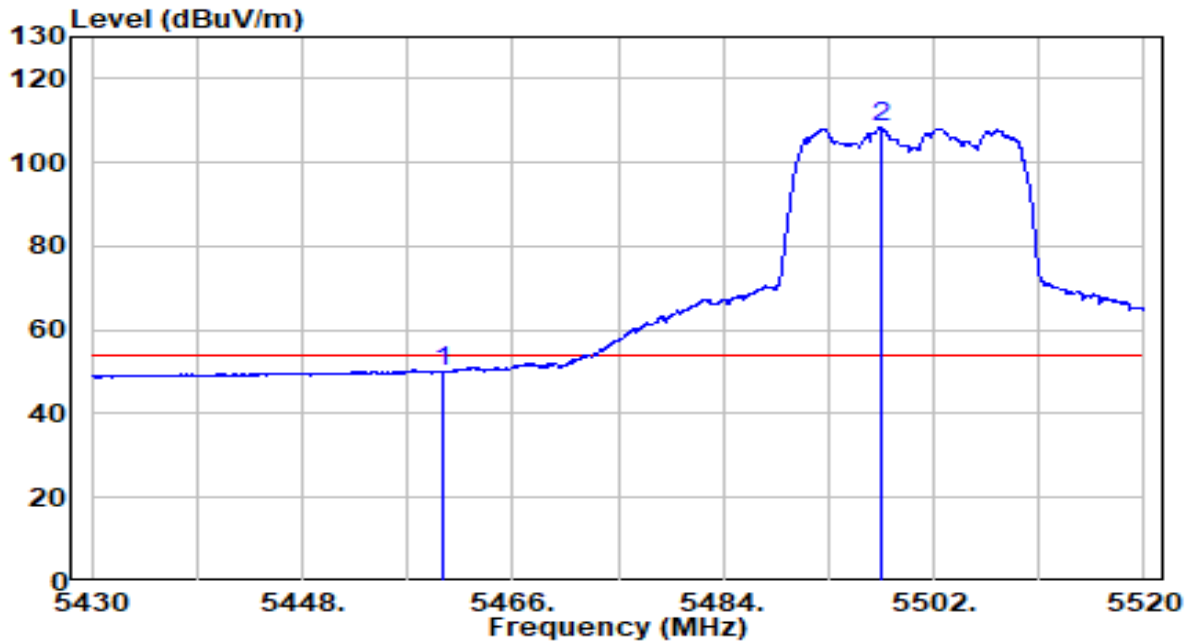


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.67	20.23	49.89	-4.11	54.00	Average
2	* 5497.500	88.09	20.27	108.35	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

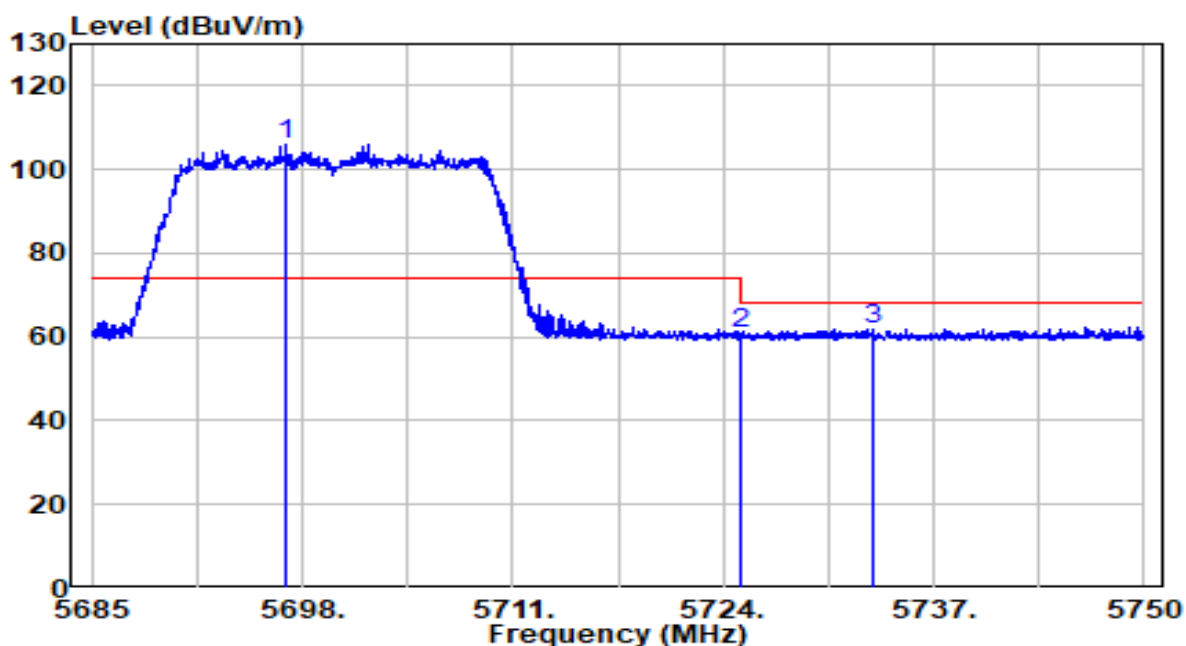


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5697.058	85.13	20.91	106.04	N/A	N/A	Peak
2		5725.000	39.71	21.00	60.71	-7.49	68.20	Peak
3		5733.230	40.93	21.03	61.96	-6.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

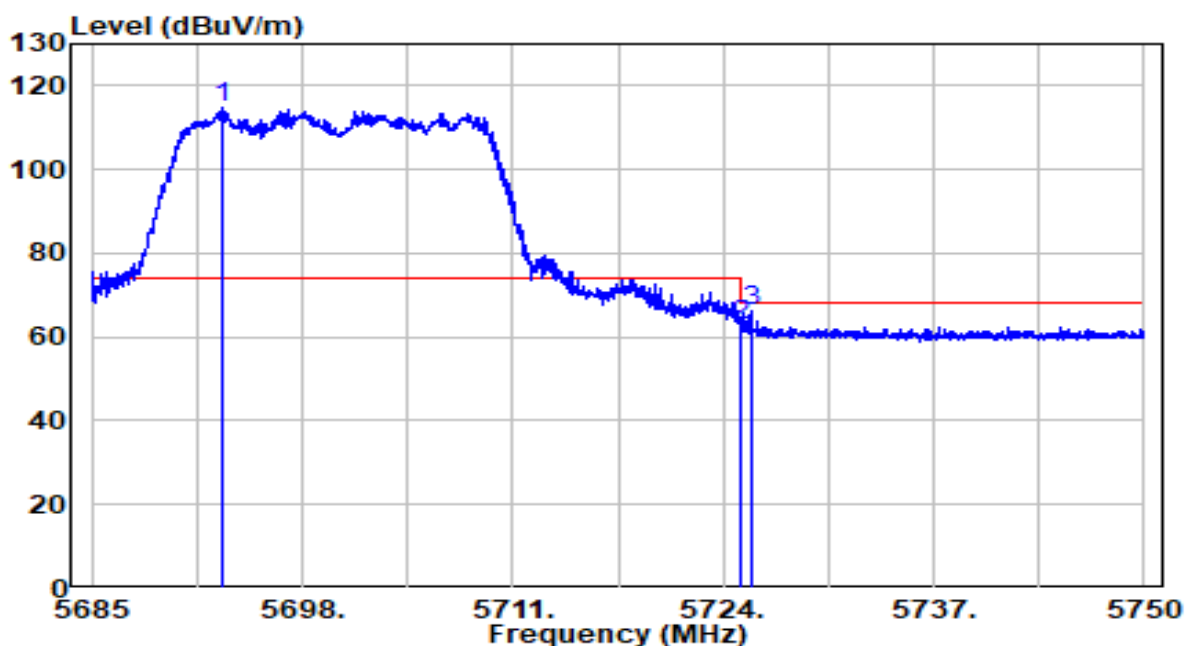


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5693.027	93.93	20.90	114.83	N/A	N/A	Peak
2		5725.000	41.92	21.00	62.92	-5.28	68.20	Peak
3		5725.755	45.13	21.00	66.13	-2.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

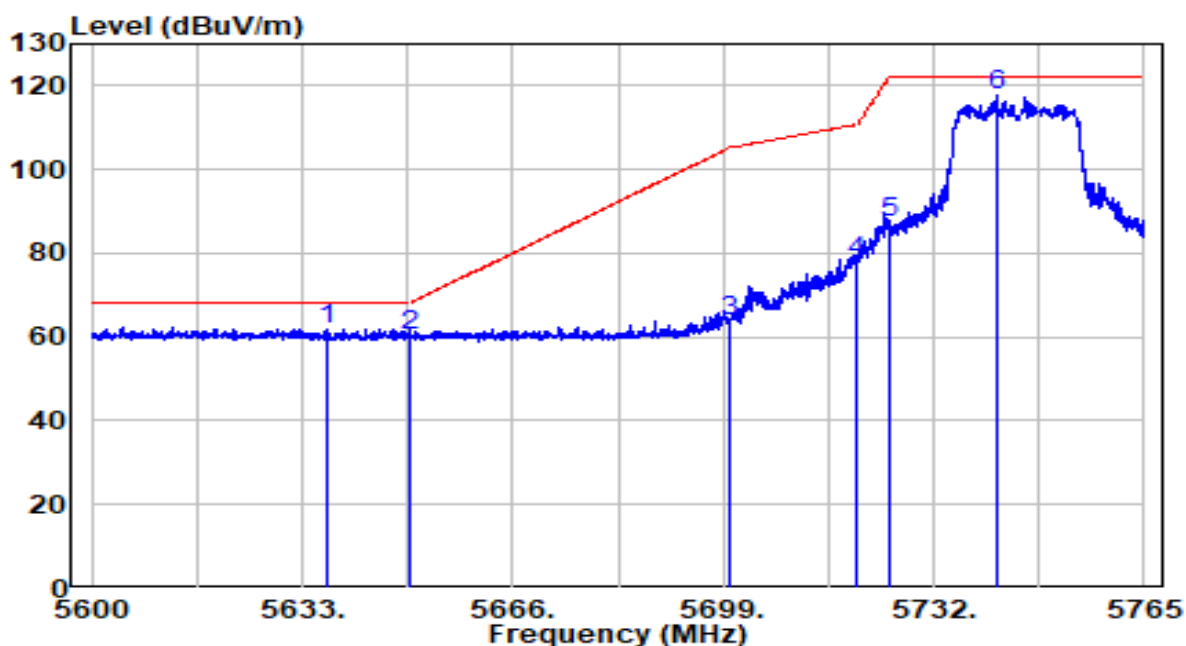


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5637.042	41.09	20.71	61.80	-6.40	68.20	Peak
2	5650.000	39.80	20.76	60.56	-7.64	68.20	Peak
3	5700.000	43.01	20.92	63.93	-41.27	105.20	Peak
4	5720.000	56.94	20.98	77.92	-32.88	110.80	Peak
5	5725.000	66.40	21.00	87.40	-34.80	122.20	Peak
6	* 5741.900	96.52	21.05	117.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

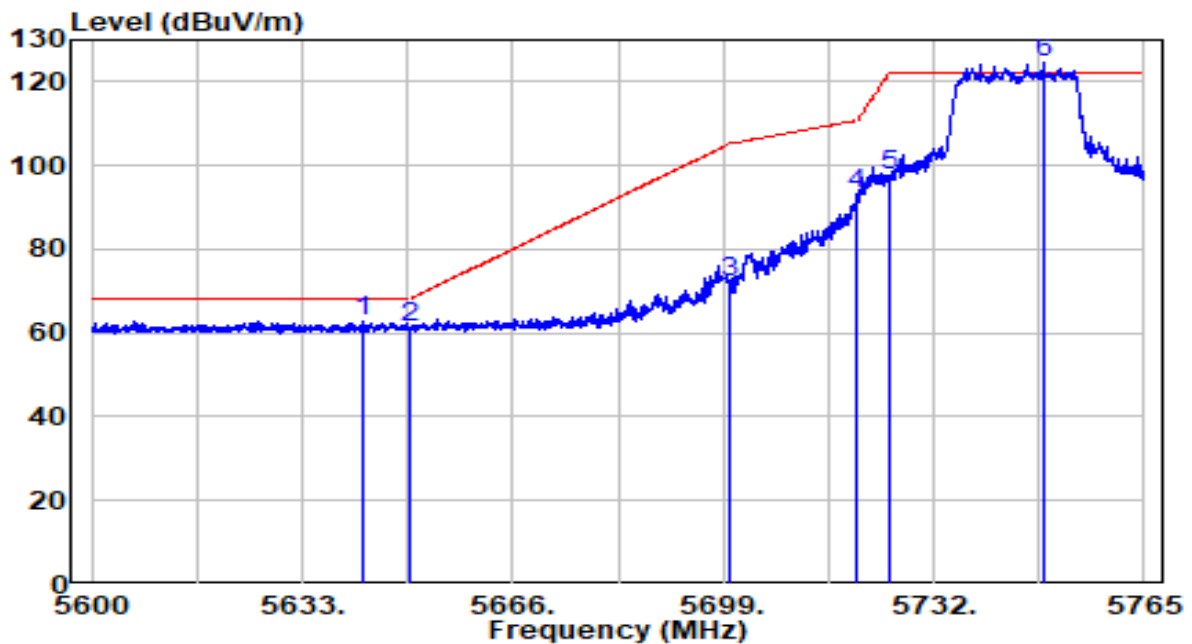


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5642.322	42.19	20.73	62.93	-5.27	68.20	Peak
2	5650.000	40.75	20.76	61.51	-6.69	68.20	Peak
3	5700.000	51.18	20.92	72.10	-33.10	105.20	Peak
4	5720.000	72.19	20.98	93.17	-17.63	110.80	Peak
5	5725.000	76.65	21.00	97.65	-24.55	122.20	Peak
6	* 5749.243	103.49	21.08	124.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

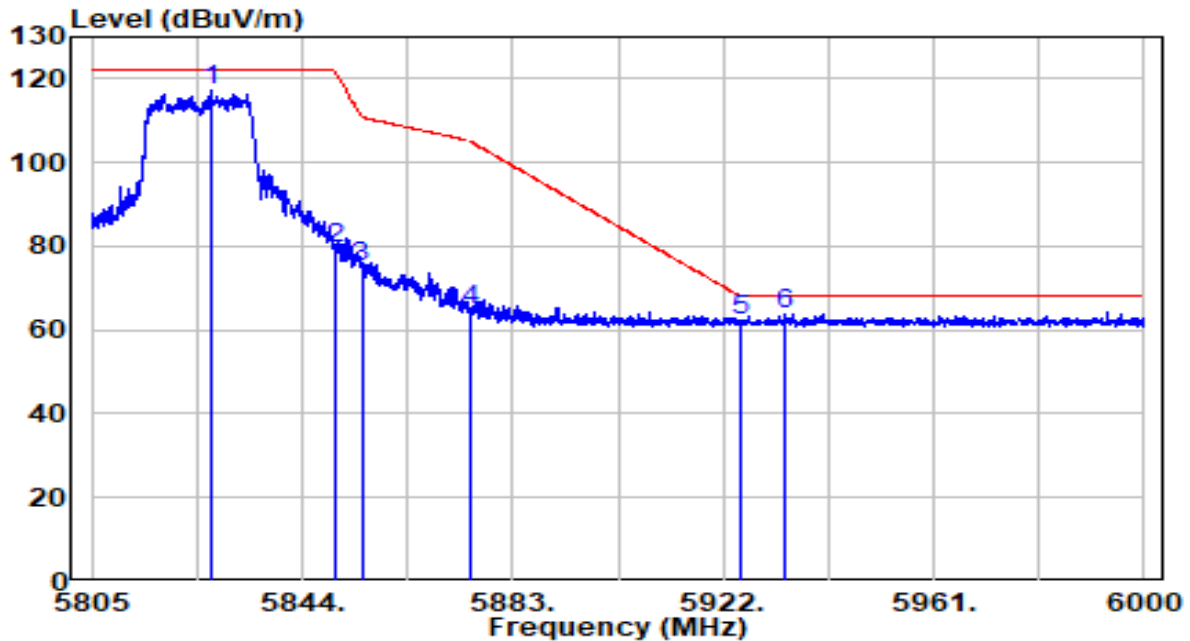


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5826.938	95.86	21.33	117.19	N/A	N/A	Peak
2	5850.000	57.90	21.40	79.30	-42.90	122.20	Peak
3	5855.000	53.83	21.42	75.25	-35.55	110.80	Peak
4	5875.000	43.25	21.49	64.73	-40.47	105.20	Peak
5	5925.000	40.54	21.65	62.19	-6.01	68.20	Peak
6	* 5933.310	42.28	21.67	63.96	-4.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

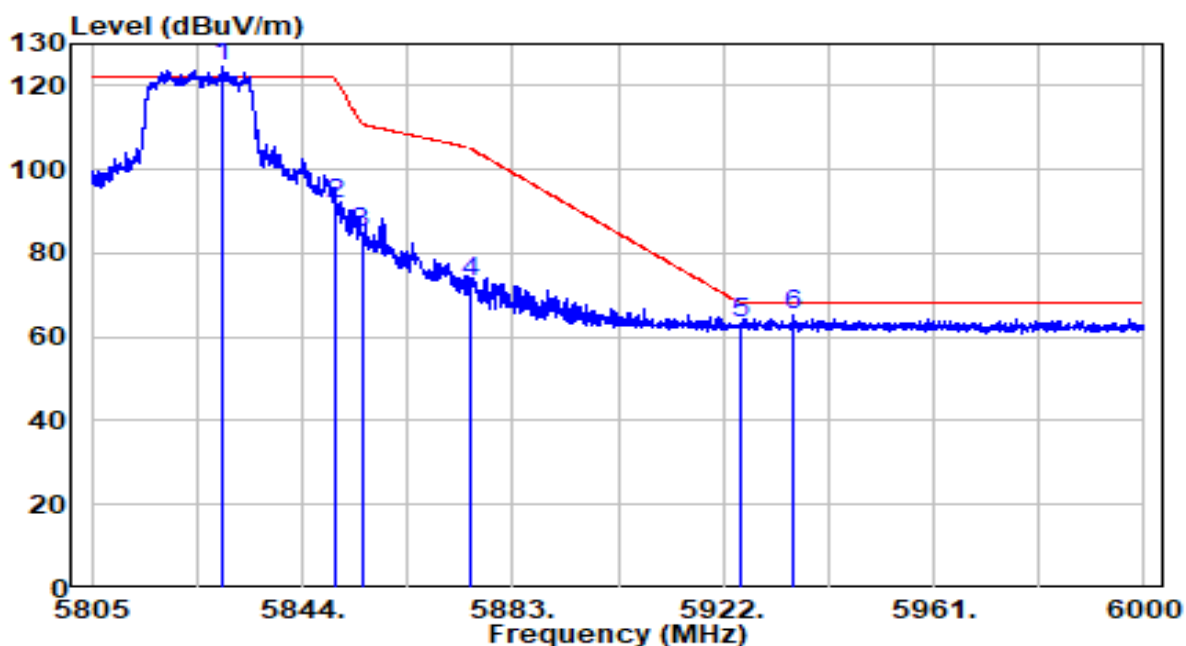


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5829.277	103.25	21.34	124.59	N/A	N/A	Peak
2		5850.000	70.58	21.40	91.98	-30.22	122.20	Peak
3		5855.000	63.30	21.42	84.72	-26.08	110.80	Peak
4		5875.000	51.49	21.49	72.98	-32.22	105.20	Peak
5		5925.000	41.50	21.65	63.14	-5.06	68.20	Peak
6		5935.163	43.79	21.68	65.47	-2.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

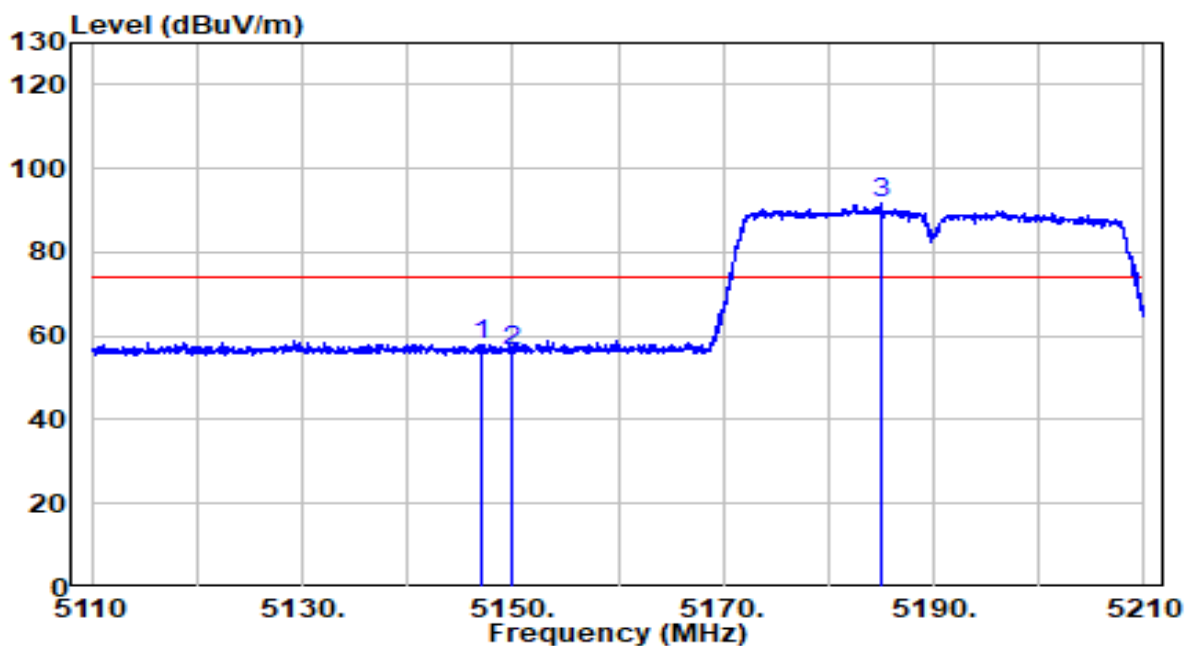


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.050	38.02	19.90	57.92	-16.08	74.00	Peak
2	5150.000	36.71	19.91	56.62	-17.38	74.00	Peak
3	* 5185.000	71.87	19.94	91.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

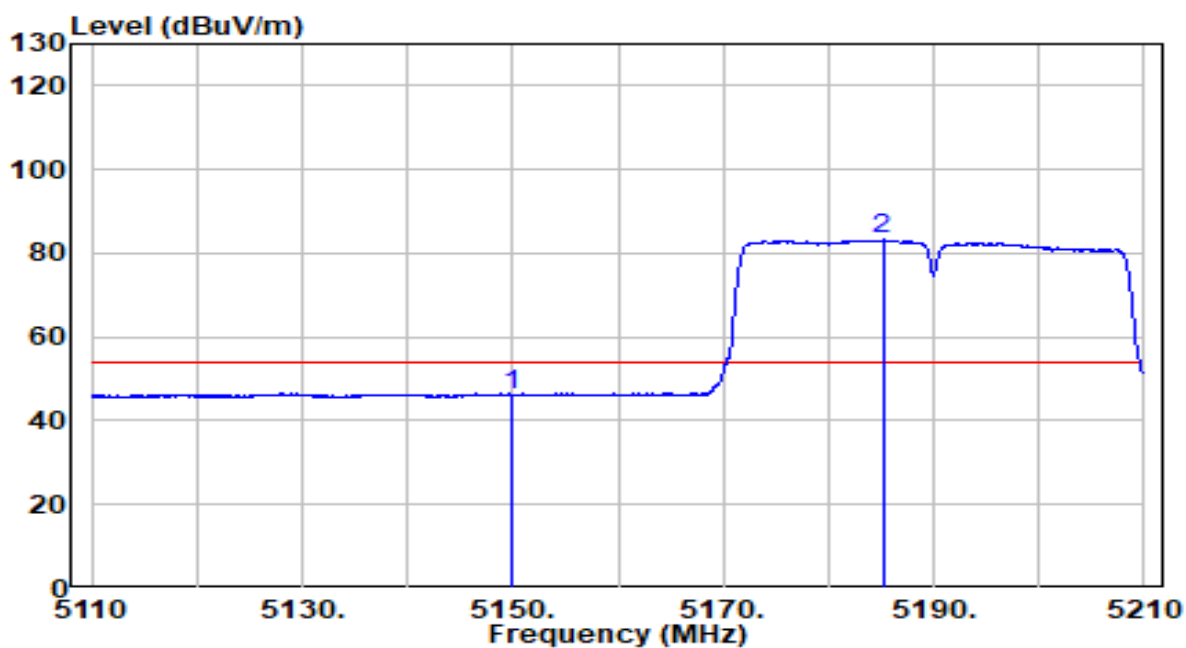


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	26.24	19.91	46.14	-7.86	54.00	Average
2	* 5185.150	63.27	19.94	83.21	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

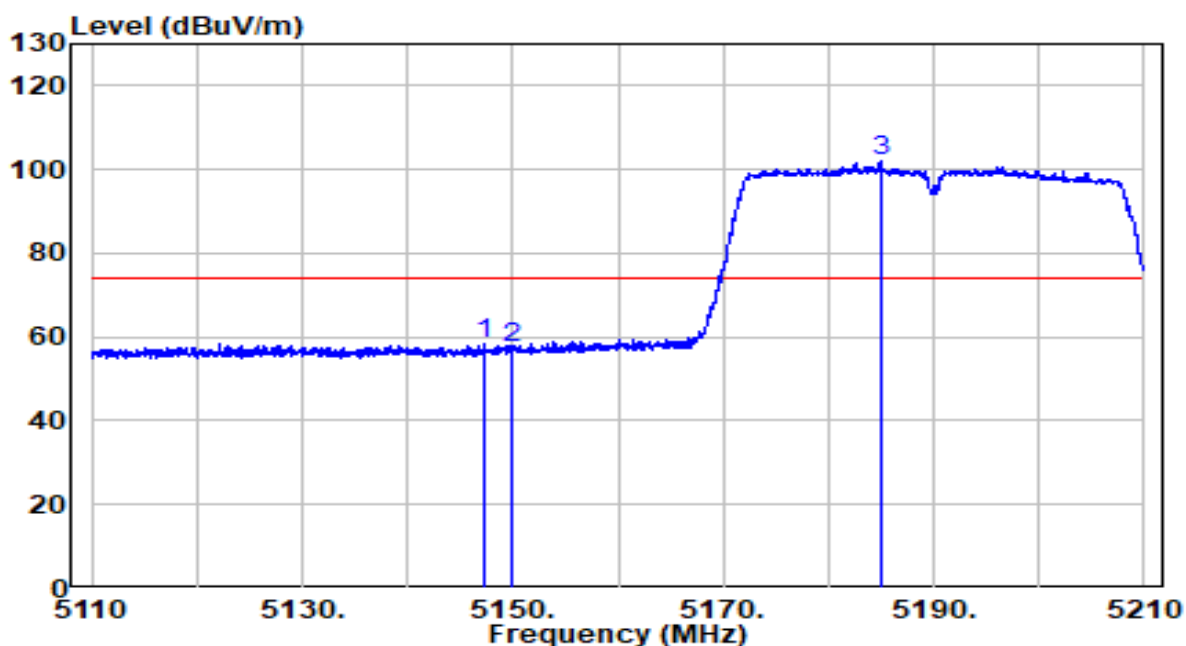


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.350	38.42	19.90	58.32	-15.68	74.00	Peak
2	5150.000	37.49	19.91	57.39	-16.61	74.00	Peak
3	* 5184.900	81.96	19.94	101.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

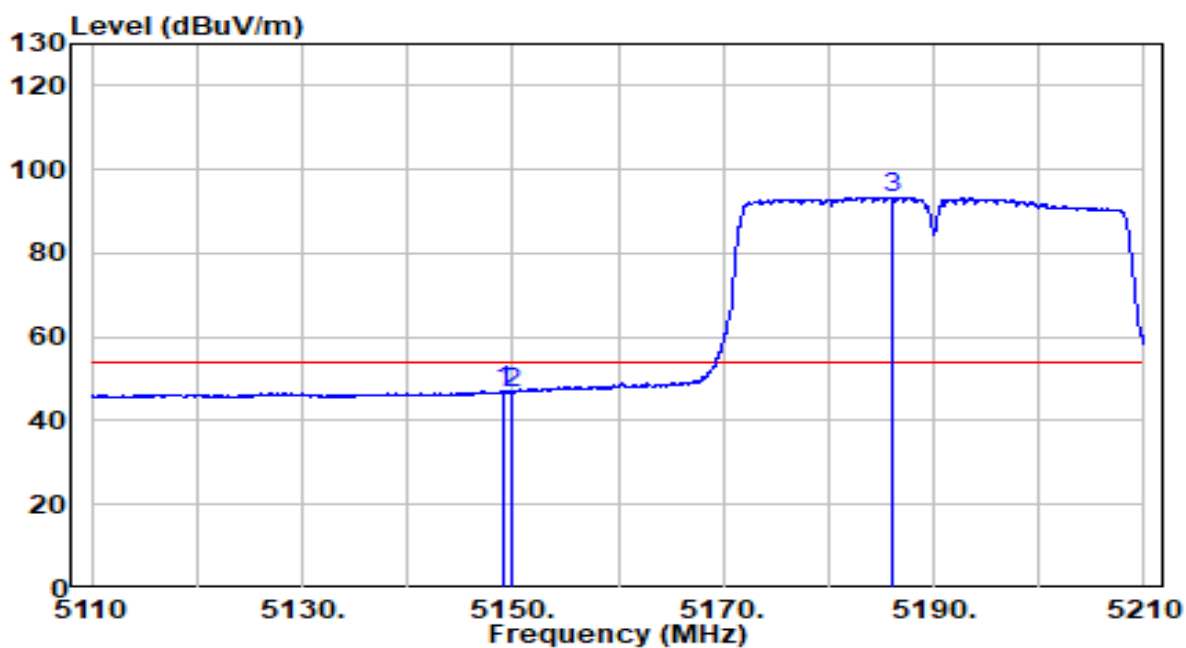


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.050	27.26	19.91	47.16	-6.84	54.00	Average
2	5150.000	26.93	19.91	46.84	-7.16	54.00	Average
3	* 5186.000	73.40	19.94	93.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

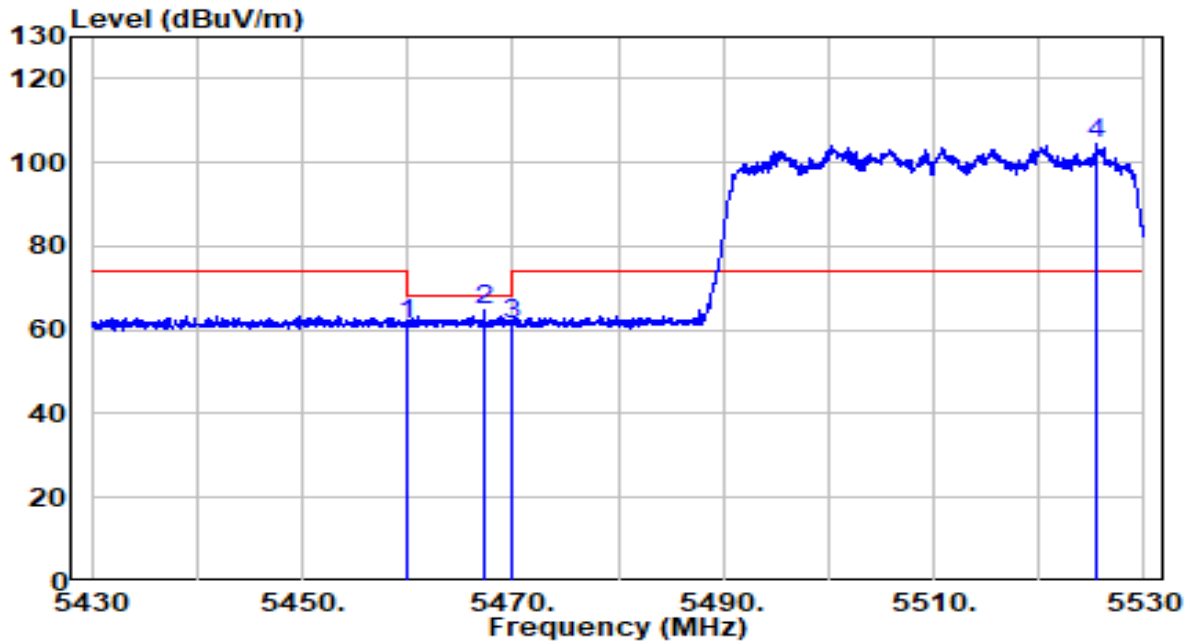


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.18	20.23	61.41	-6.79	68.20	Peak
2	5467.350	44.49	20.24	64.73	-3.47	68.20	Peak
3	5470.000	41.08	20.24	61.32	-6.88	68.20	Peak
4	* 5525.550	84.28	20.35	104.63	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

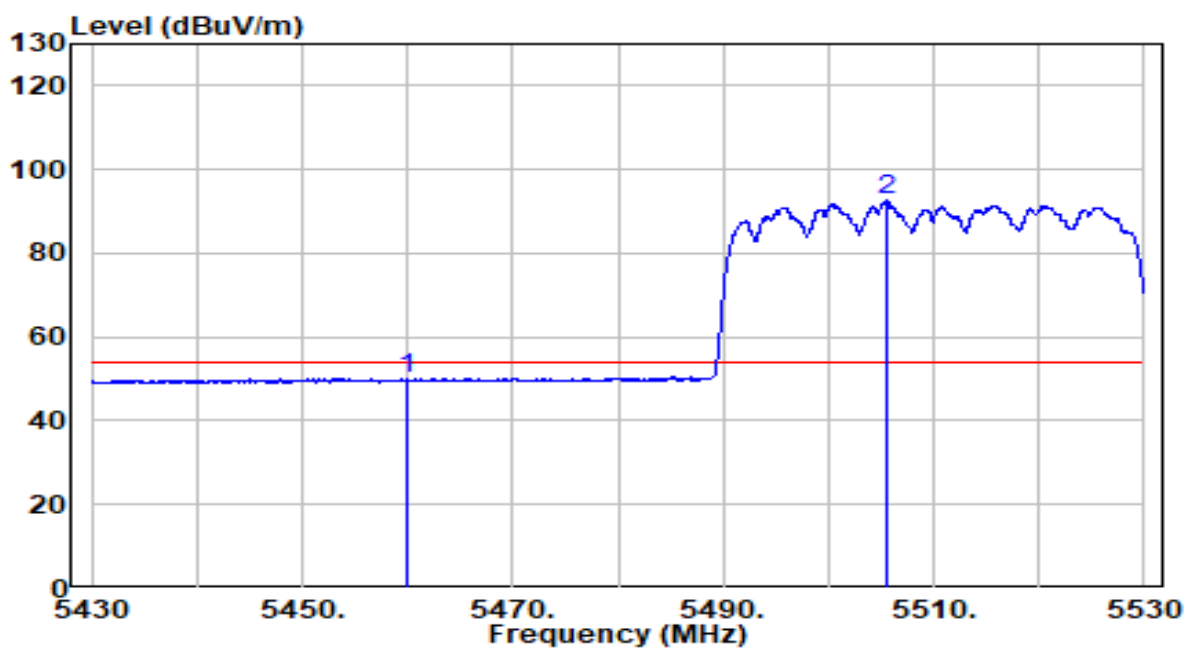


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.62	20.23	49.84	-4.16	54.00	Average
2	* 5505.500	72.22	20.29	92.50	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

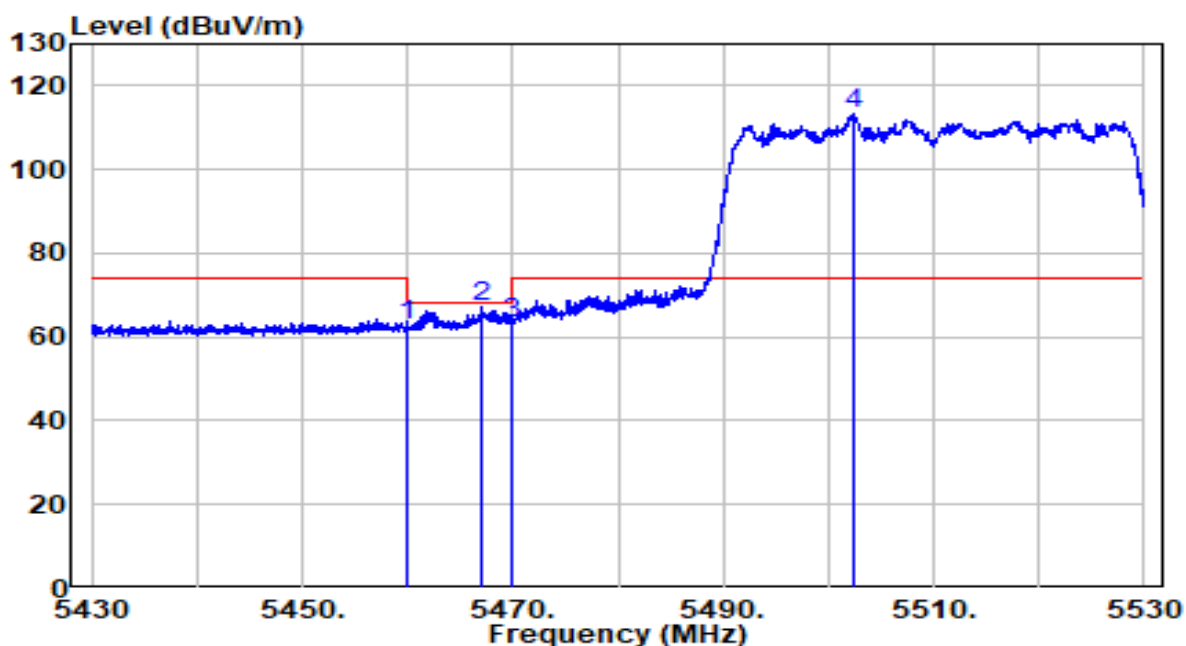


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	42.33	20.23	62.56	-5.64	68.20	Peak
2	5467.150	47.12	20.24	67.36	-0.84	68.20	Peak
3	5470.000	43.17	20.24	63.41	-4.79	68.20	Peak
4	* 5502.300	93.14	20.28	113.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

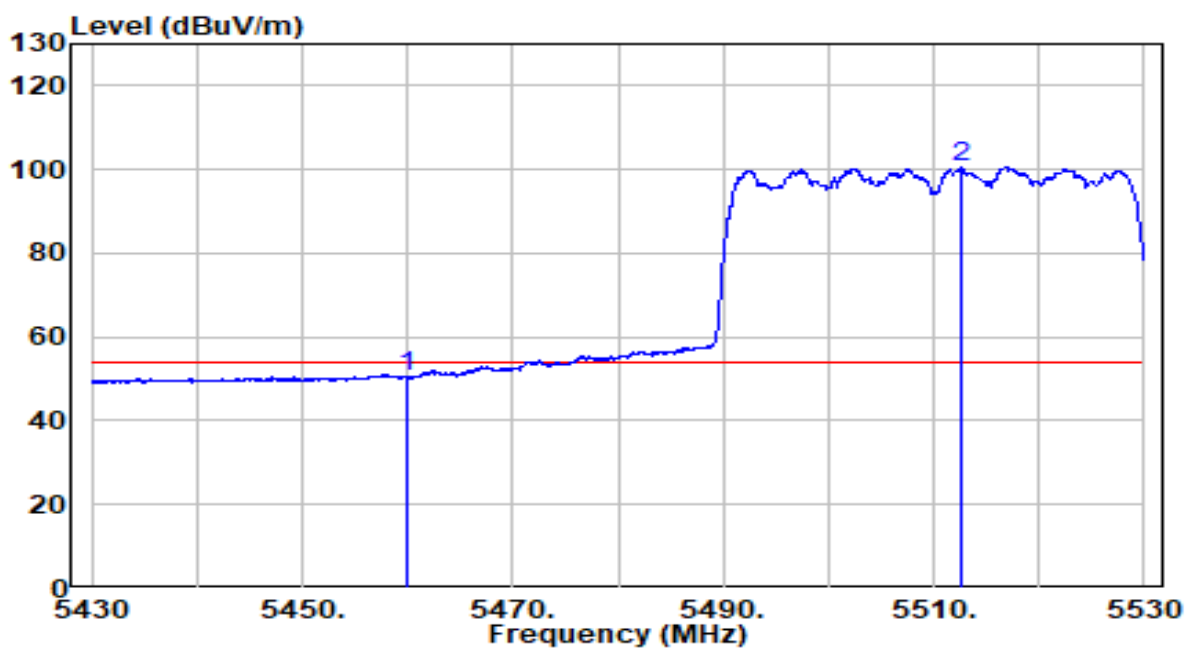


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.27	20.23	50.50	-3.50	54.00	Average
2	* 5512.550	80.20	20.31	100.51	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

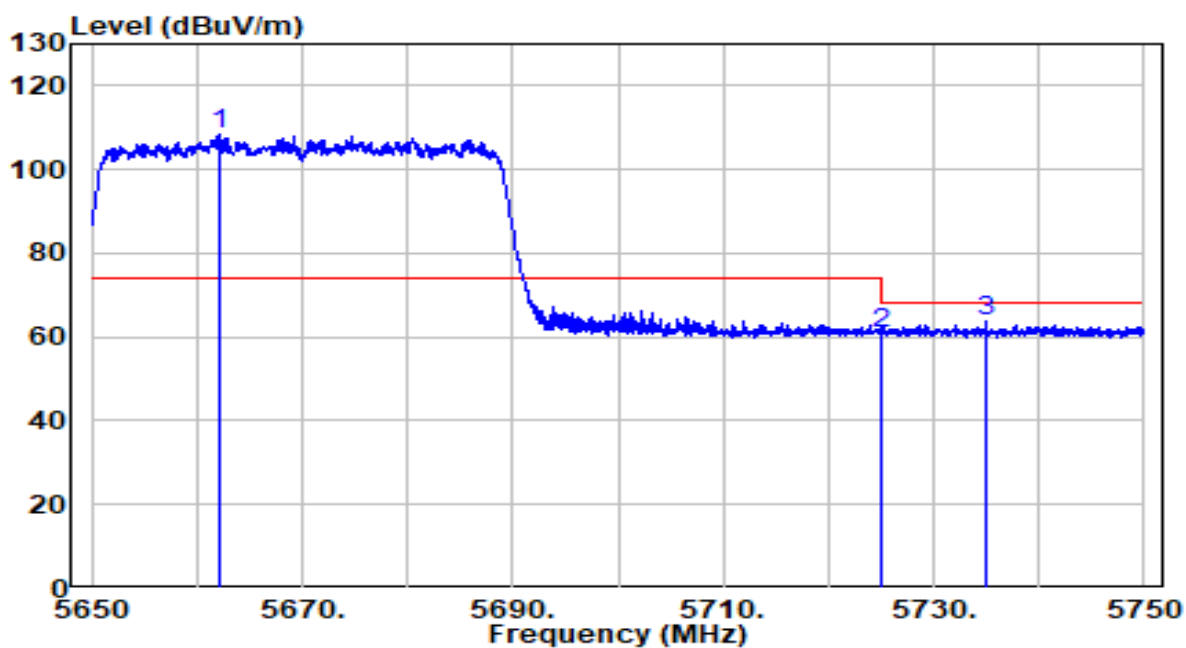


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5662.150	87.42	20.80	108.21	N/A	N/A	Peak
2		5725.000	39.95	21.00	60.95	-7.25	68.20	Peak
3		5735.050	42.74	21.03	63.77	-4.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

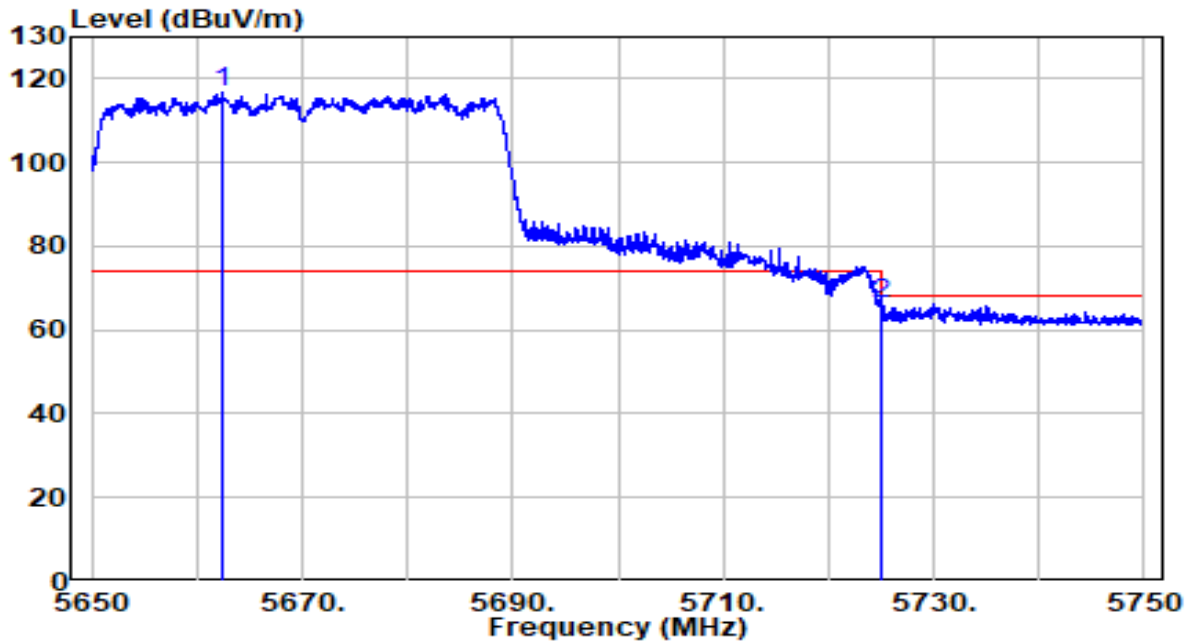


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5662.350	96.03	20.80	116.82	N/A	N/A	Peak
2		5725.000	45.37	21.00	66.37	-1.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

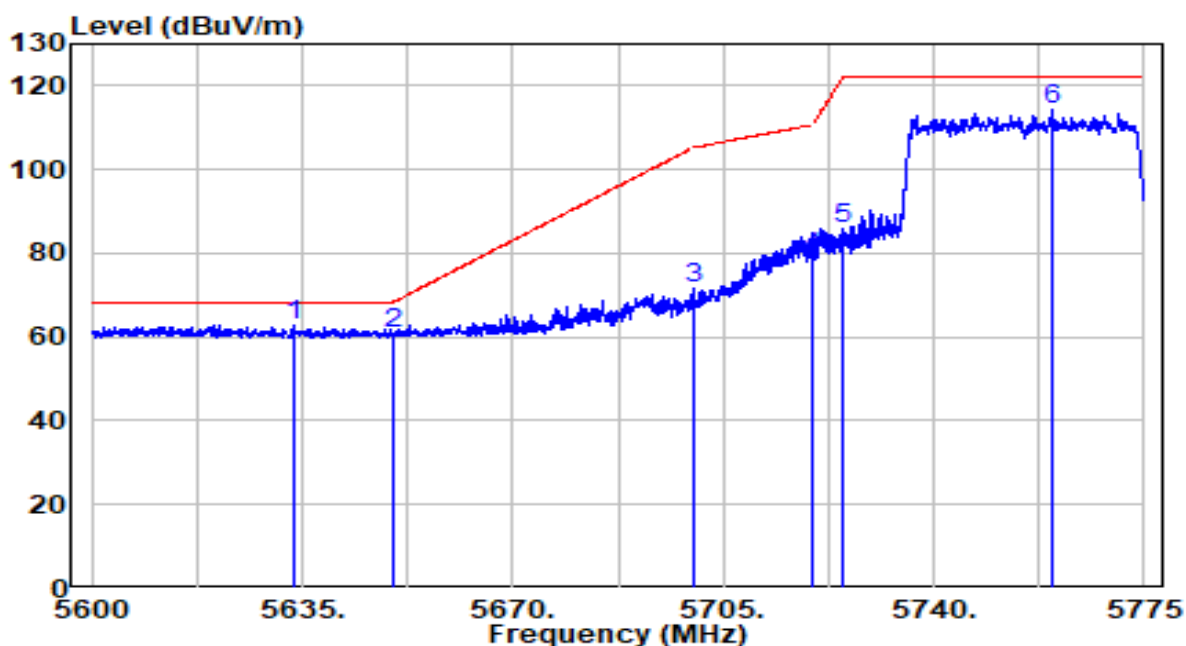


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5633.688	42.12	20.70	62.82	-5.38	68.20	Peak
2		5650.000	40.03	20.76	60.78	-7.42	68.20	Peak
3		5700.000	50.46	20.92	71.38	-33.82	105.20	Peak
4		5720.000	58.23	20.98	79.21	-31.59	110.80	Peak
5		5725.000	64.63	21.00	85.63	-36.57	122.20	Peak
6		5759.775	93.00	21.11	114.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

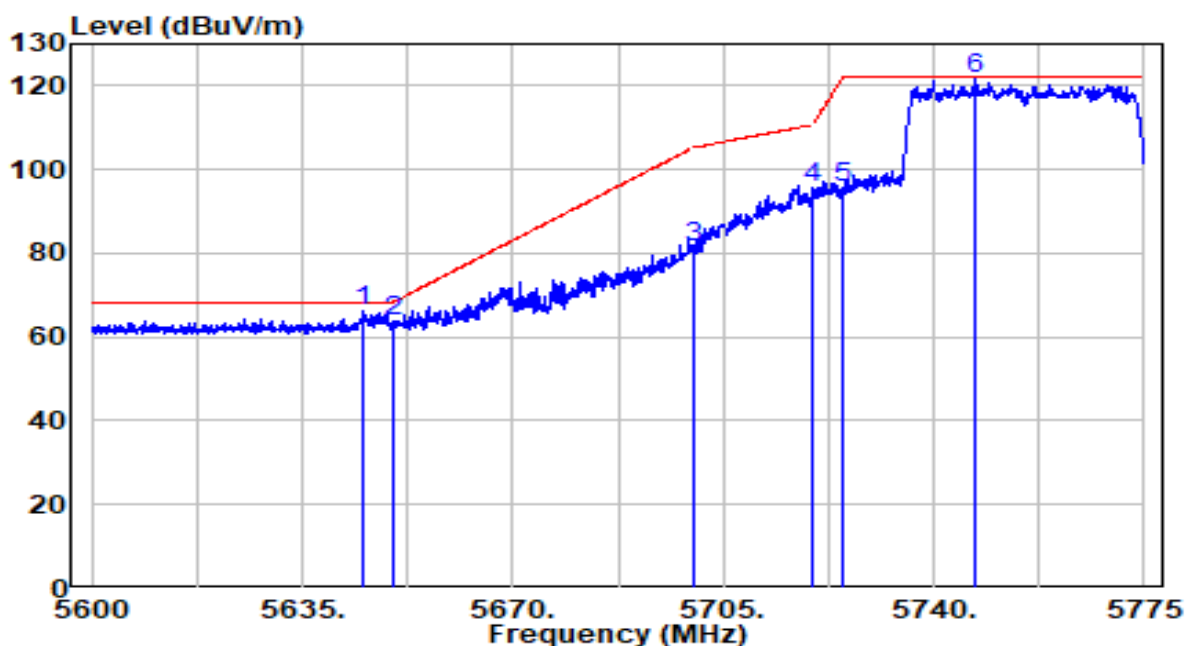


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5645.150	45.36	20.74	66.10	-2.10	68.20	Peak
2	5650.000	42.86	20.76	63.62	-4.58	68.20	Peak
3	5700.000	60.56	20.92	81.47	-23.73	105.20	Peak
4	5720.000	74.67	20.98	95.66	-15.14	110.80	Peak
5	5725.000	74.49	21.00	95.49	-26.71	122.20	Peak
6	* 5747.000	100.38	21.07	121.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

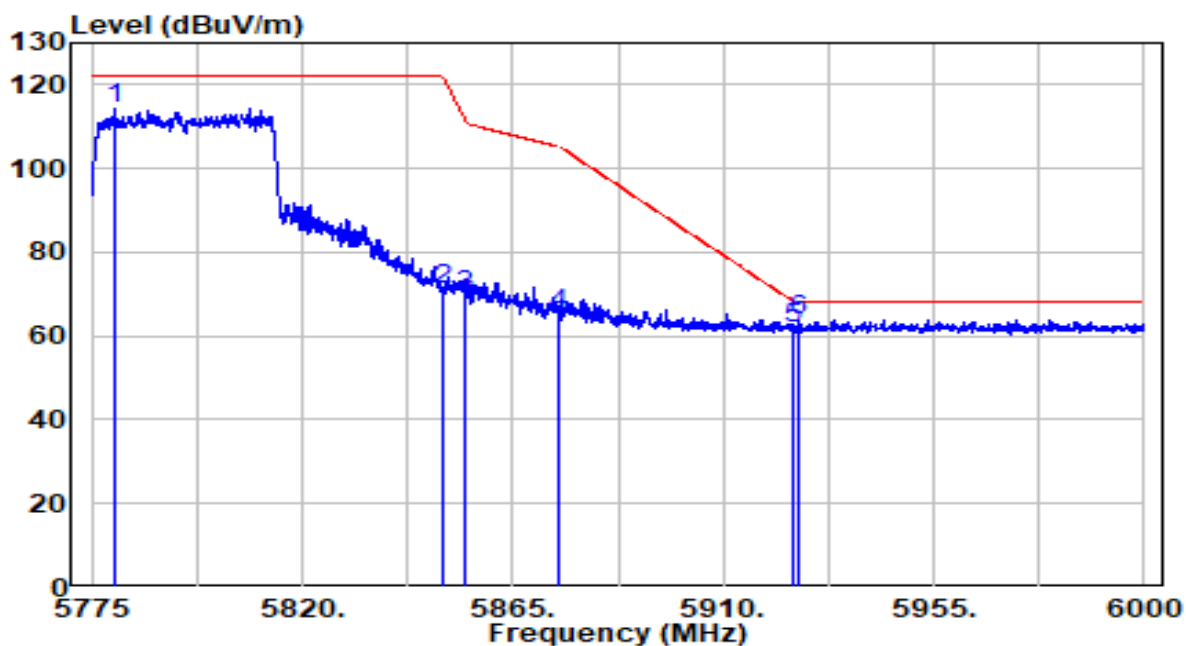


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5780.063	93.28	21.18	114.46	N/A	N/A	Peak
2	5850.000	49.68	21.40	71.08	-51.12	122.20	Peak
3	5855.000	48.34	21.42	69.76	-41.04	110.80	Peak
4	5875.000	43.53	21.49	65.02	-40.18	105.20	Peak
5	5925.000	40.23	21.65	61.88	-6.32	68.20	Peak
6	* 5926.200	42.28	21.65	63.93	-4.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

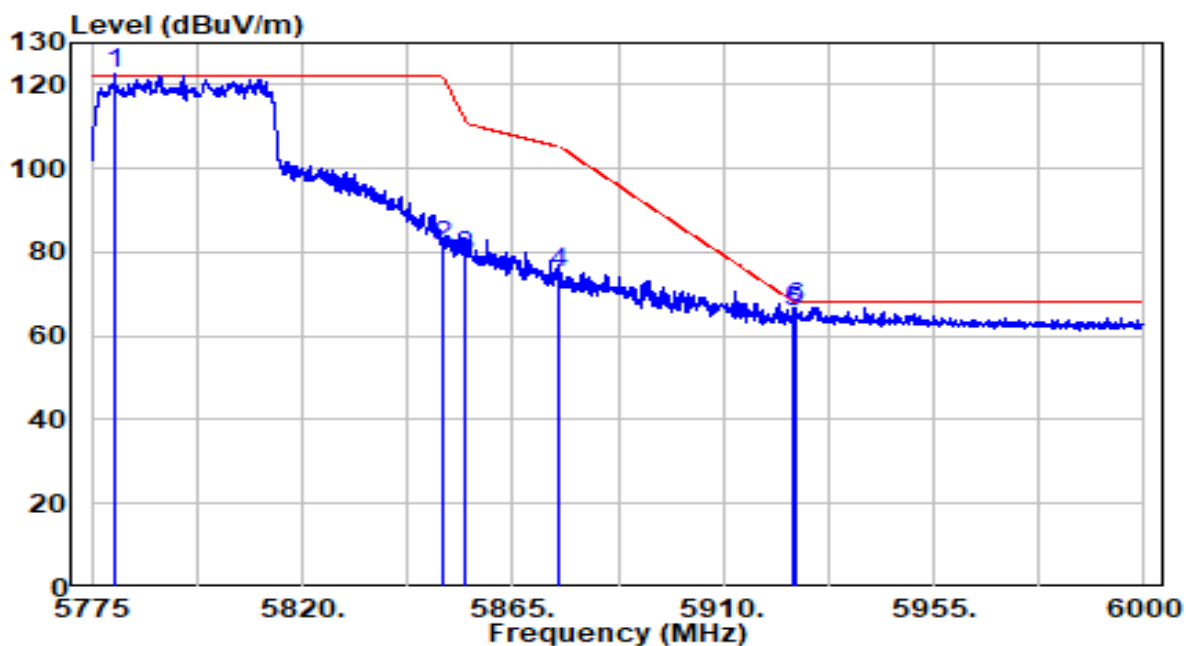


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5779.837	101.55	21.18	122.73	N/A	N/A	Peak
2		5850.000	59.92	21.40	81.32	-40.88	122.20	Peak
3		5855.000	57.79	21.42	79.21	-31.59	110.80	Peak
4		5875.000	53.42	21.49	74.90	-30.30	105.20	Peak
5		5925.000	44.02	21.65	65.67	-2.53	68.20	Peak
6		5925.750	45.20	21.65	66.85	-1.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

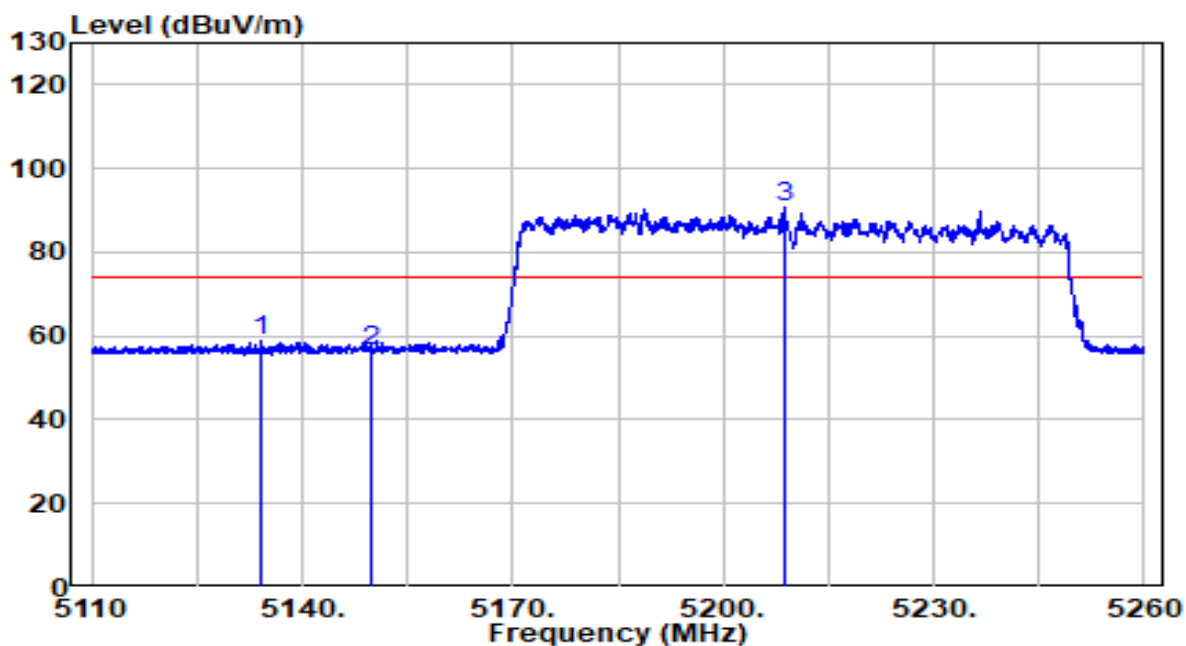


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5134.150	38.85	19.89	58.74	-15.26	74.00	Peak
2	5150.000	36.63	19.91	56.54	-17.46	74.00	Peak
3	* 5208.700	70.64	19.97	90.61	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

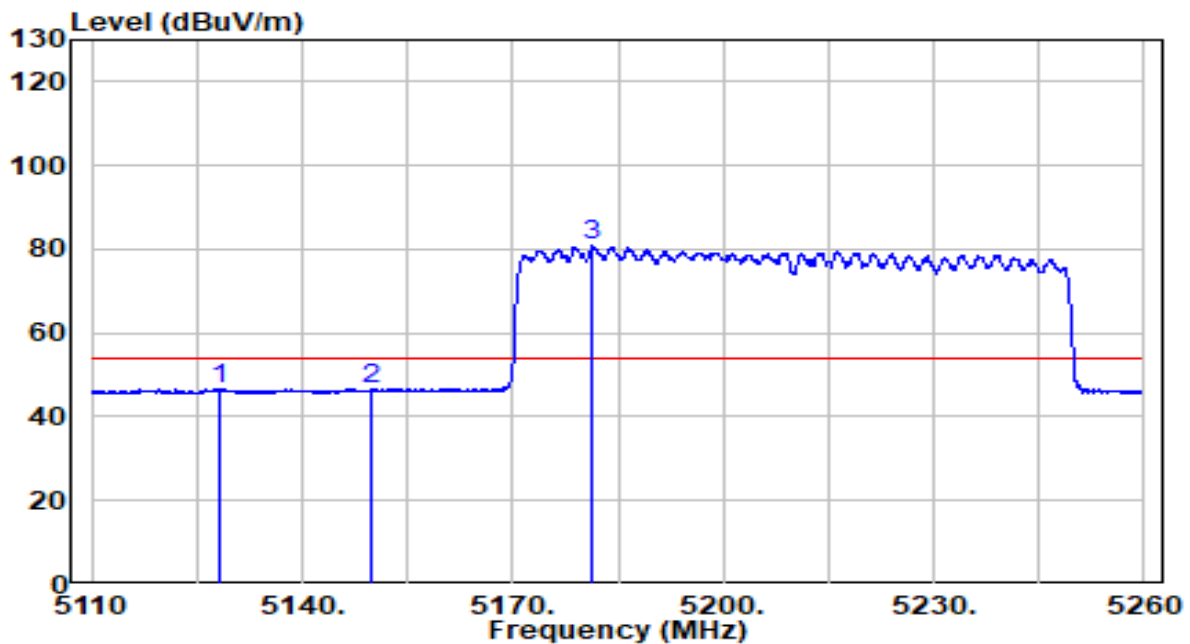


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5128.300	26.82	19.88	46.70	-7.30	54.00	Average
2	5150.000	26.60	19.91	46.51	-7.49	54.00	Average
3	* 5181.325	60.88	19.94	80.81	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

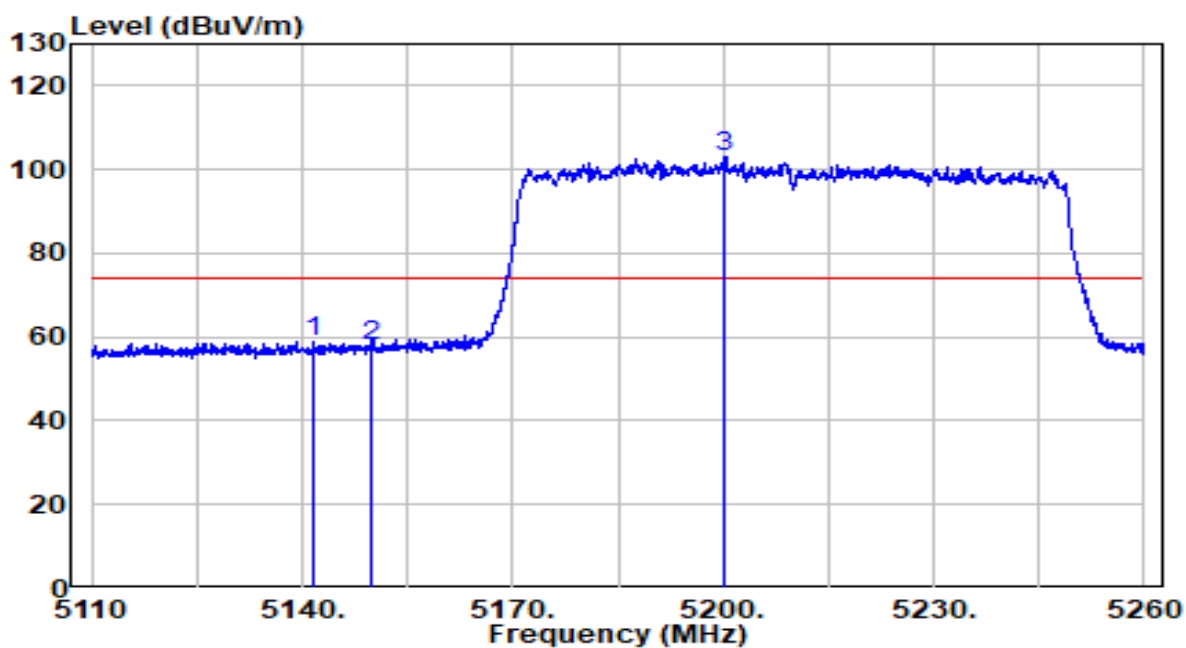


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5141.725	38.97	19.90	58.87	-15.13	74.00	Peak
2	5150.000	37.82	19.91	57.73	-16.27	74.00	Peak
3	* 5200.075	83.28	19.96	103.24	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

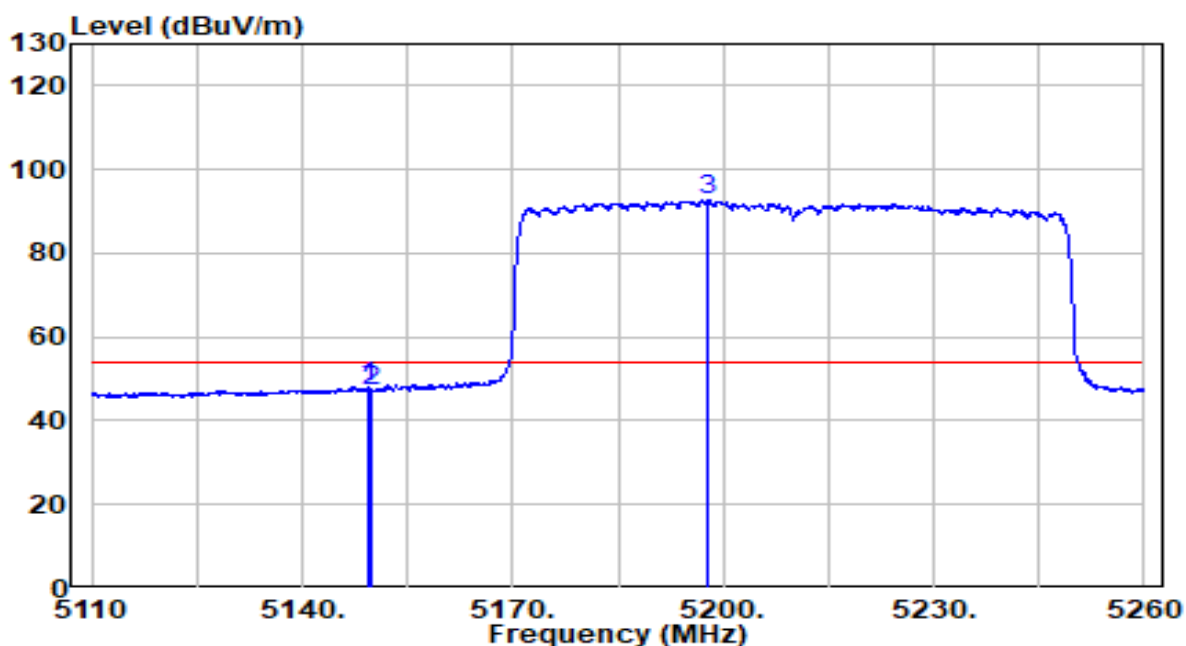


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.525	28.10	19.91	48.01	-5.99	54.00	Average
2	5150.000	27.33	19.91	47.23	-6.77	54.00	Average
3	* 5197.825	72.79	19.96	92.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

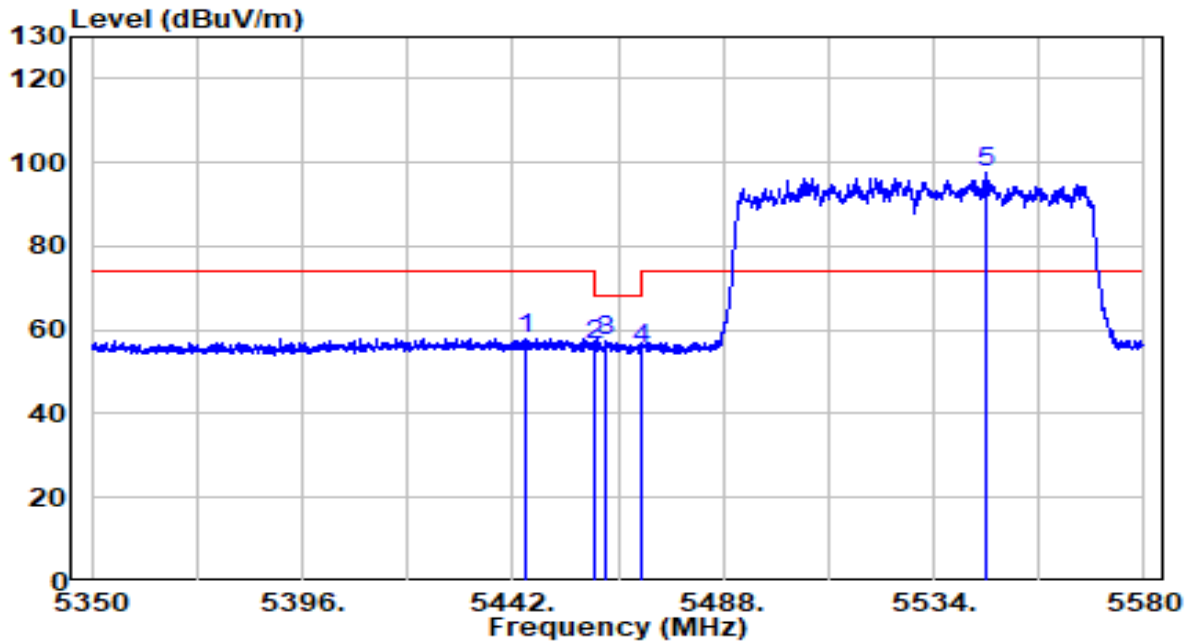


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5444.875	37.80	20.21	58.01	-15.99	74.00	Peak
2	5460.000	36.33	20.23	56.56	-11.64	68.20	Peak
3	5462.125	37.28	20.23	57.51	-10.69	68.20	Peak
4	5470.000	35.43	20.24	55.66	-12.54	68.20	Peak
5	* 5545.615	77.17	20.42	97.58	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

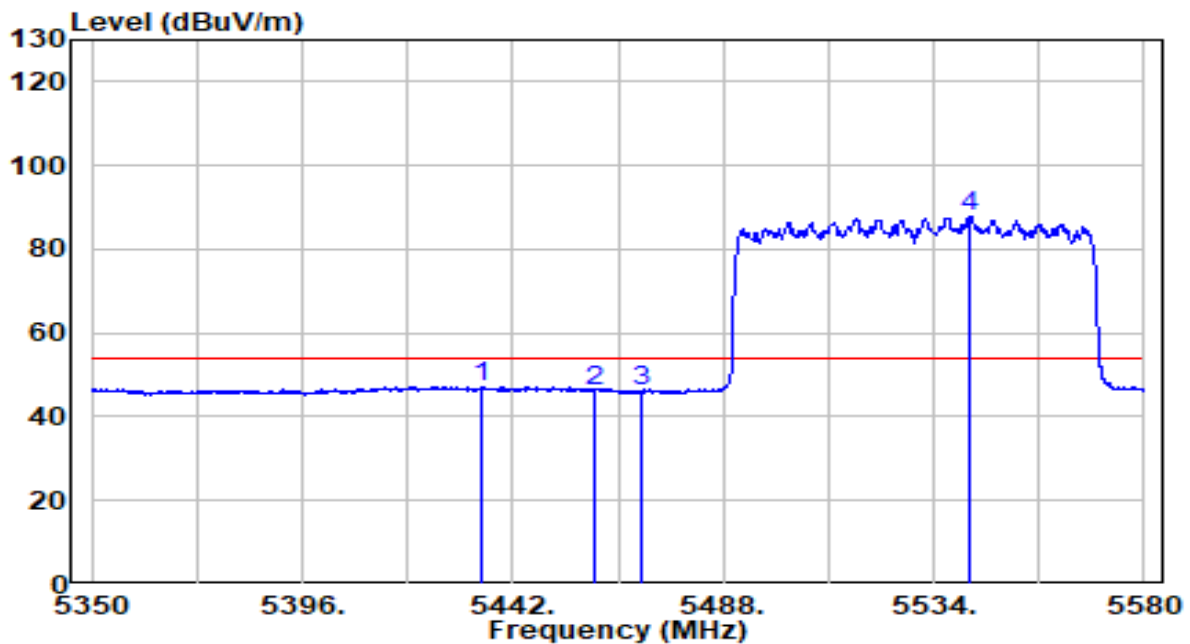


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5435.215	27.06	20.20	47.27	-6.73	54.00	Average
2	5460.000	25.92	20.23	46.15	-7.85	54.00	Average
3	5470.000	25.65	20.24	45.89	-8.11	54.00	Average
4	* 5542.050	67.61	20.41	88.02	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

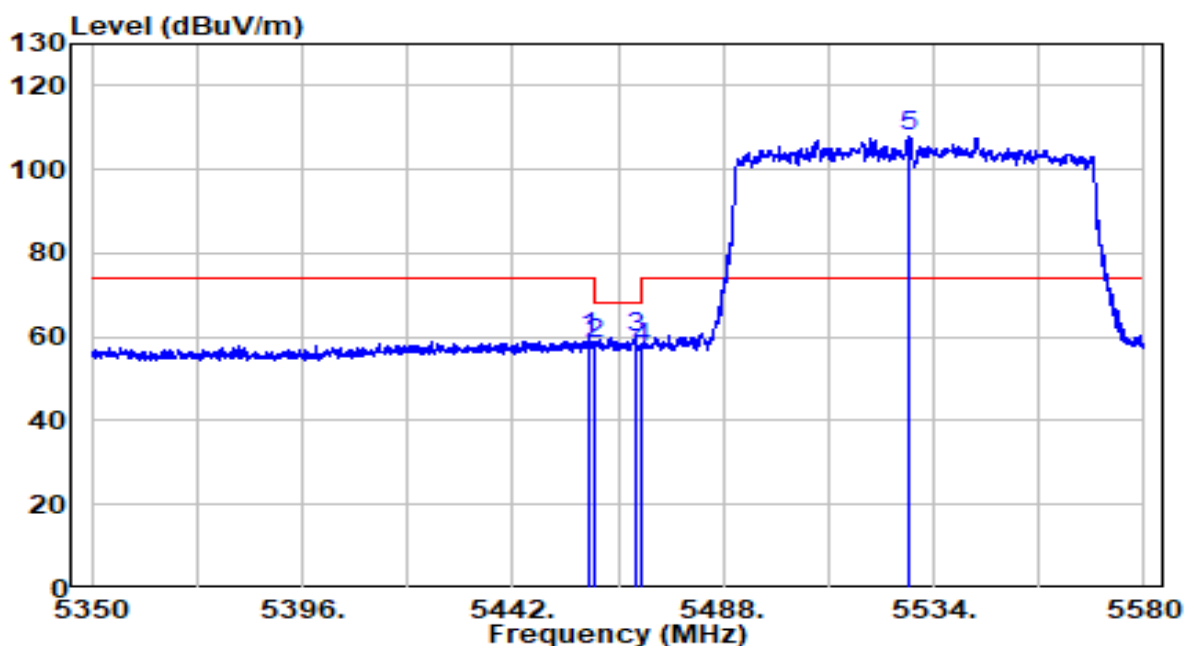


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.790	39.44	20.23	59.67	-14.33	74.00	Peak
2	5460.000	38.06	20.23	58.29	-9.91	68.20	Peak
3	5468.680	39.84	20.24	60.08	-8.12	68.20	Peak
4	5470.000	37.37	20.24	57.60	-10.60	68.20	Peak
5	* 5528.710	87.72	20.36	108.08	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

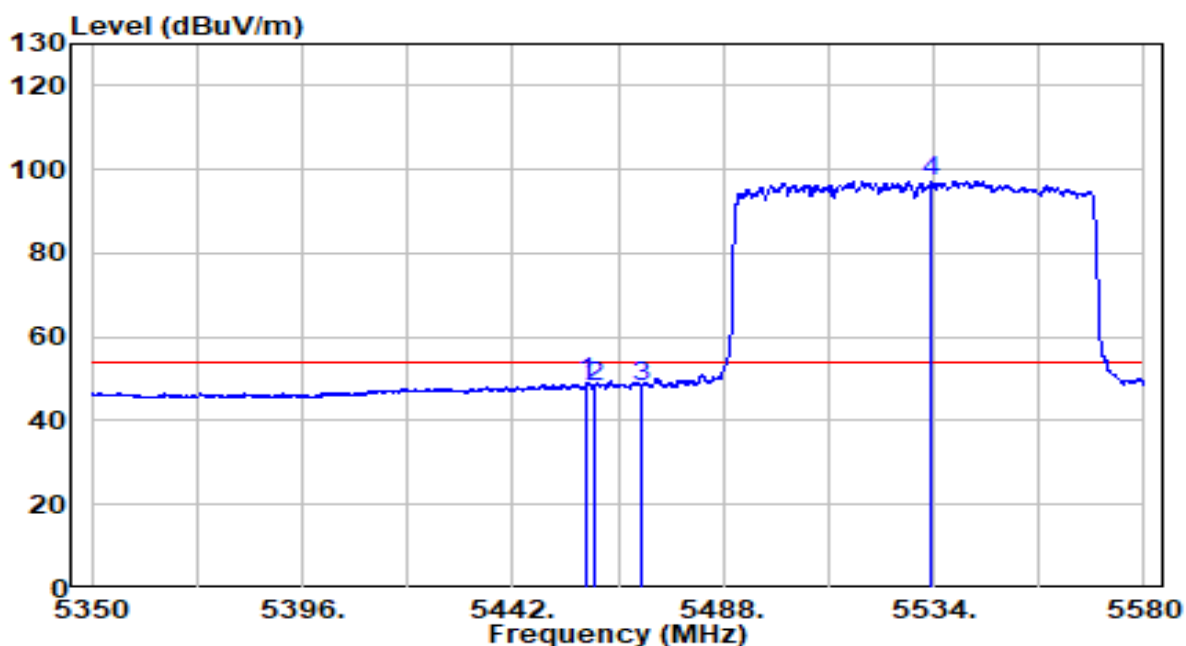


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.330	28.85	20.23	49.07	-4.93	54.00	Average
2	5460.000	27.76	20.23	47.99	-6.01	54.00	Average
3	5470.000	27.76	20.24	48.00	-6.00	54.00	Average
4	* 5533.425	76.81	20.38	97.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

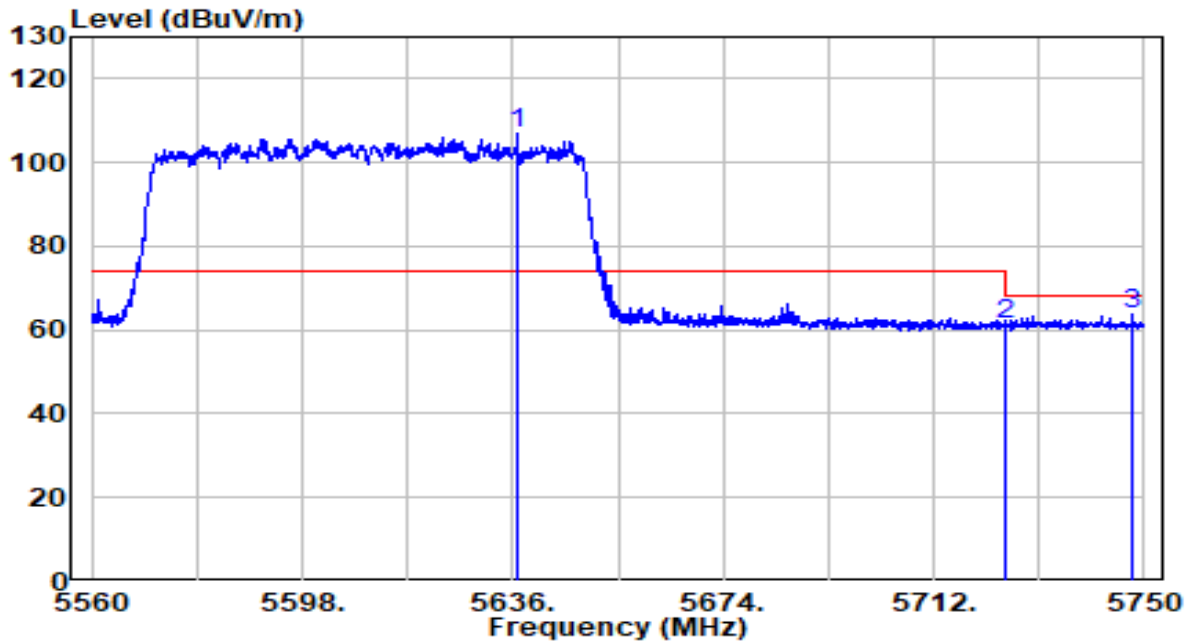


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5636.760	86.18	20.71	106.89	N/A	N/A	Peak
2		5725.000	40.45	21.00	61.45	-6.75	68.20	Peak
3		5748.005	42.63	21.07	63.71	-4.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

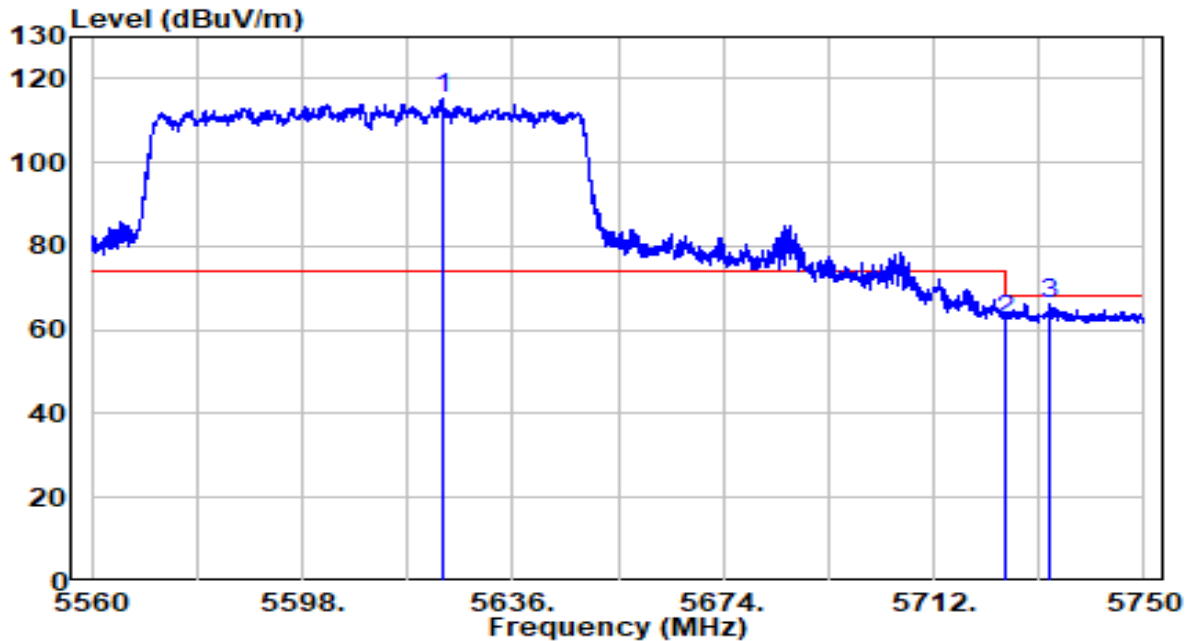


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5623.365	94.69	20.67	115.35	N/A	N/A	Peak
2		5725.000	41.52	21.00	62.52	-5.68	68.20	Peak
3		5732.805	45.39	21.02	66.41	-1.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

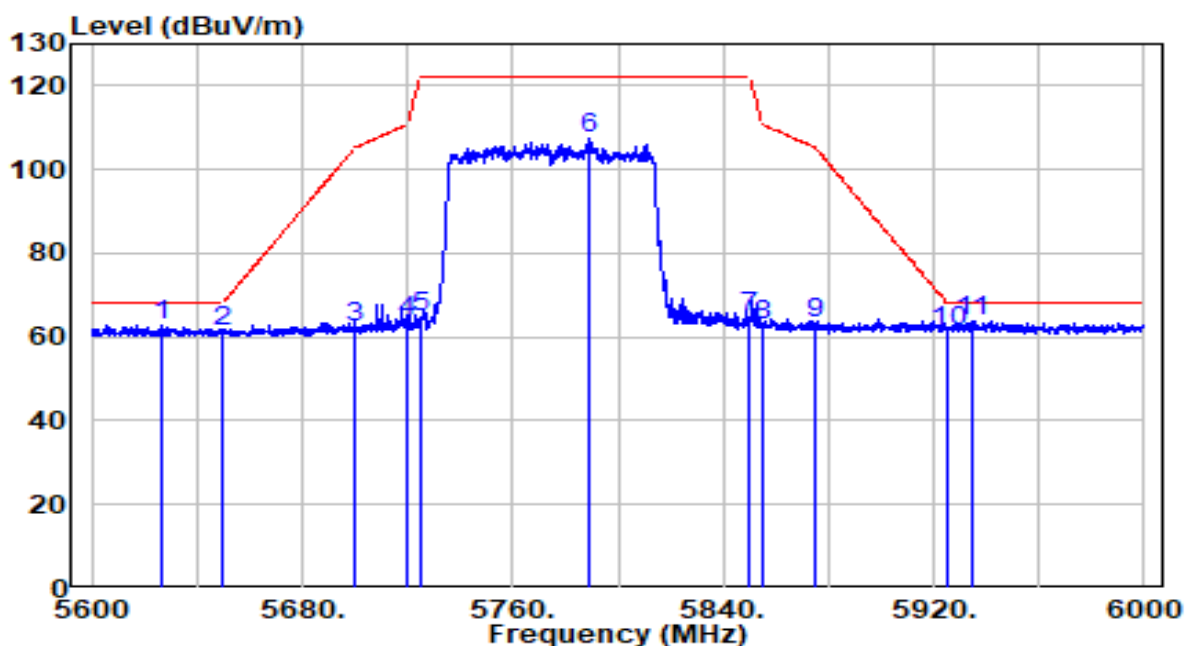


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5627.000	42.23	20.68	62.91	-5.29	68.20	Peak
2	5650.000	40.62	20.76	61.38	-6.82	68.20	Peak
3	5700.000	41.41	20.92	62.33	-42.87	105.20	Peak
4	5720.000	42.88	20.98	63.86	-46.94	110.80	Peak
5	5725.000	43.58	21.00	64.58	-57.62	122.20	Peak
6	5788.600	86.07	21.21	107.28	N/A	N/A	Peak
7	5850.000	43.28	21.40	64.69	-57.51	122.20	Peak
8	5855.000	41.18	21.42	62.60	-48.20	110.80	Peak
9	5875.000	41.72	21.49	63.21	-41.99	105.20	Peak
10	5925.000	39.82	21.65	61.47	-6.73	68.20	Peak
11	* 5934.800	42.22	21.68	63.90	-4.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

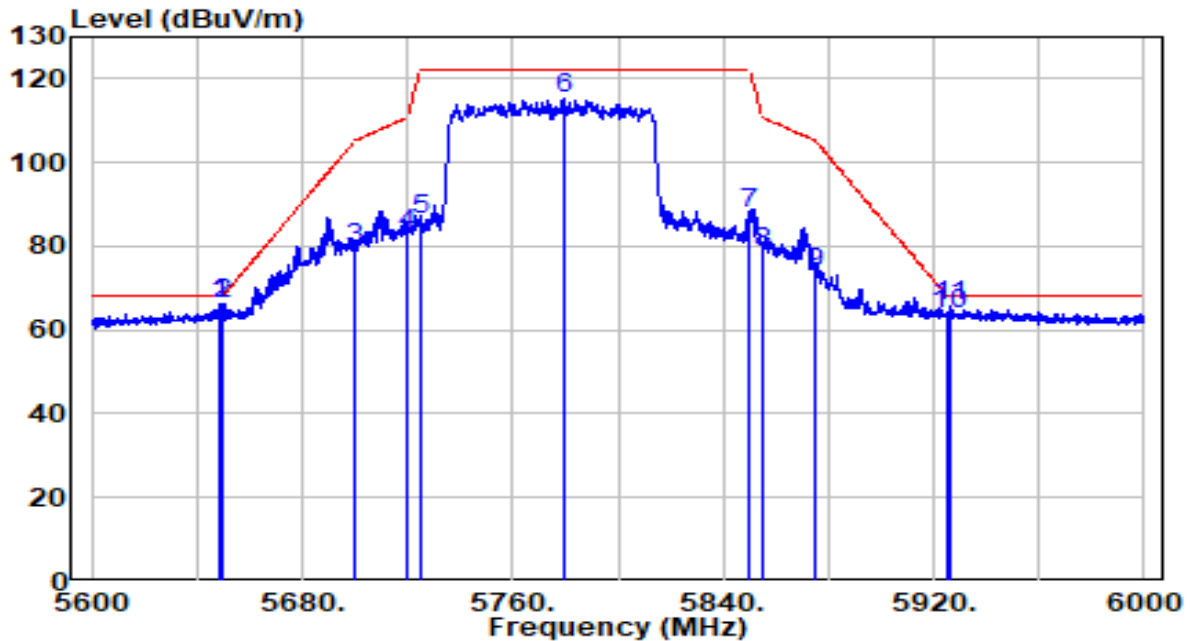


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5648.800	45.64	20.75	66.39	-1.81	68.20	Peak
2		5650.000	45.39	20.76	66.15	-2.05	68.20	Peak
3		5700.000	58.73	20.92	79.65	-25.55	105.20	Peak
4		5720.000	62.10	20.98	83.08	-27.72	110.80	Peak
5		5725.000	65.26	21.00	86.26	-35.94	122.20	Peak
6		5779.400	93.96	21.18	115.14	N/A	N/A	Peak
7		5850.000	66.36	21.40	87.76	-34.44	122.20	Peak
8		5855.000	57.28	21.42	78.70	-32.10	110.80	Peak
9		5875.000	52.02	21.49	73.50	-31.70	105.20	Peak
10		5925.000	41.88	21.65	63.53	-4.67	68.20	Peak
11		5925.800	43.96	21.65	65.61	-2.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 WI-FI 6 三頻電競路由器	Date of Test	2020-05-16
Factor	BBHA 9120D	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

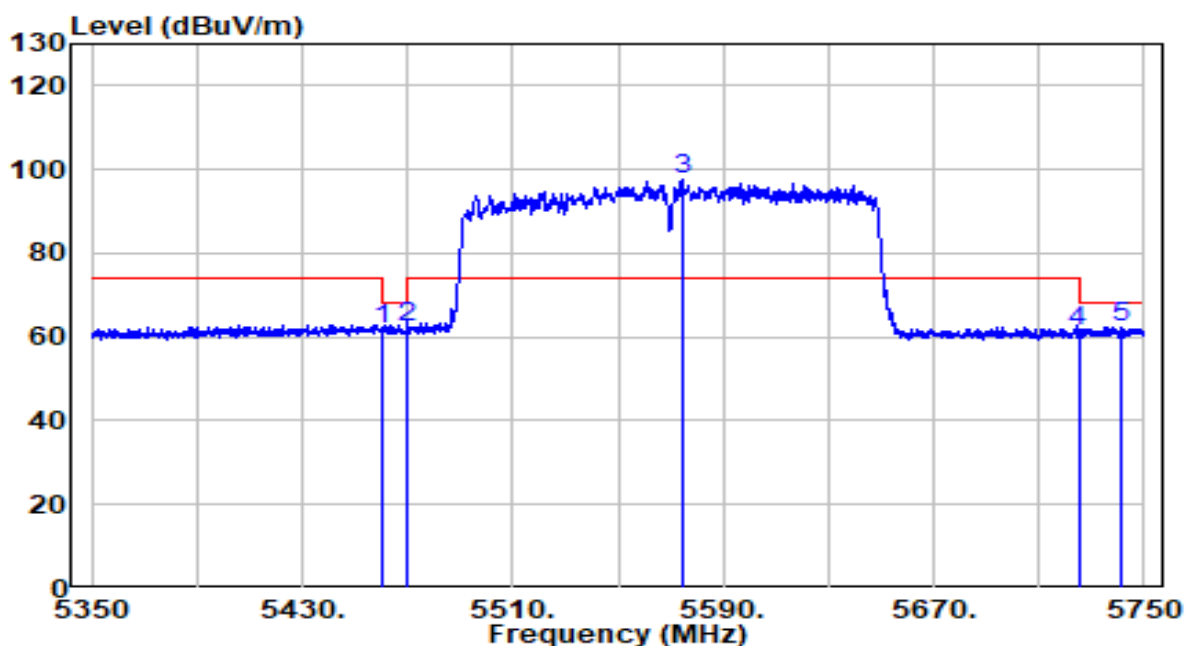

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.48	20.23	61.71	-6.49	68.20	Peak
2	5470.000	42.19	20.24	62.43	-5.77	68.20	Peak
3	* 5574.200	77.06	20.51	97.57	N/A	N/A	Peak
4	5725.000	40.37	21.00	61.37	-6.83	68.20	Peak
5	5741.200	41.48	21.05	62.53	-5.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.