



## Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V03  
Report Template Revision Date: Mar.1st, 2017

# TEST REPORT

**Report No.:** CQASZ20251203102E

**Applicant:** Shenzhen Teslong Technology Co.,Ltd

**Address of Applicant:** 2nd Floor, Building 4, Jinhuaafa Factory Area, East Side of Donghuan2nd Road Longhua Street, Longhua New District, Shenzhen

**Manufacturer:** Shenzhen Teslong Technology Co.,Ltd

**Address of Manufacturer:** 2nd Floor, Building 4, Jinhuaafa Factory Area, East Side of Donghuan2nd Road Longhua Street, Longhua New District, Shenzhen

**Factory:** Shenzhen Teslong Technology Co.,Ltd

**Address of Factory:** 2nd Floor, Building 4, Jinhuaafa Factory Area, East Side of Donghuan2nd Road Longhua Street, Longhua New District, Shenzhen

**Equipment Under Test (EUT):**

**Product:** Articulating Borescope

**Test Model No.:** TF600, F6 Pro, F8 Pro

**Model No.:** TF600

**Brand Name:** Teslong

**Standards:** Item 19 of Article 2 Paragraph 1

**Date of Receipt:** 2025-12-31

**Date of Test:** 2025-12-31 to 2026-01-21

**Date of Issue:** 2026-01-26

**Test Result :** **PASS\***

Test Method: MIC Notice No.88 Appendix No.43

**Tested By:**

*Lewis Zhou*

( Lewis Zhou )

**Reviewed By:**

*Timo Lei*

( Timo Lei )

**Approved By:**

*Jack Ai*

( Jack Ai )



## 1 Version

**Revision History Of Report**

| Report No.        | Version | Description    | Issue Date |
|-------------------|---------|----------------|------------|
| CQASZ20251203102E | Rev.01  | Initial report | 2026-01-26 |

## 2 Test Summary

| Test                               | Test Requirement       | Result |
|------------------------------------|------------------------|--------|
| Frequency Error                    | Item 19 of Article 2-1 | PASS   |
| Occupied Bandwidth                 | Item 19 of Article 2-1 | PASS   |
| Spread-spectrum Bandwidth          | Item 19 of Article 2-1 | PASS   |
| Antenna Power                      | Item 19 of Article 2-1 | PASS   |
| Spurious Emission of Tx            | Item 19 of Article 2-1 | PASS   |
| Interference prevention capability | Item 19 of Article 2-1 | PASS   |
| Carrier sense capability           | Item 19 of Article 2-1 | PASS   |
| RF accessibility                   | Item 19 of Article 2-1 | PASS   |
| Spurious Emission of Rx            | Item 19 of Article 2-1 | PASS   |

**Remark:**

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

Other: NV-Normal voltage, HV-High voltage, LV-Low voltage, NTNV-Normal temperature & normal voltage

### 3 Contents

|                                                       |    |
|-------------------------------------------------------|----|
| 1 VERSION .....                                       | 2  |
| 2 TEST SUMMARY .....                                  | 3  |
| 3 CONTENTS .....                                      | 4  |
| 4 GENERAL INFORMATION .....                           | 5  |
| 4.1 General Description of E.U.T. ....                | 5  |
| 4.2 Details of E.U.T. ....                            | 5  |
| 4.3 Description of Support Units .....                | 6  |
| 4.4 Deviation from Standards .....                    | 6  |
| 4.5 Abnormalities from Standard Conditions .....      | 6  |
| 4.6 Other Information Requested by the Customer ..... | 6  |
| 4.7 Test Location .....                               | 6  |
| 4.8 Test Facility .....                               | 6  |
| 5 EQUIPMENT USED DURING TEST .....                    | 7  |
| 6 TEST RESULTS .....                                  | 9  |
| 6.1 Radio Technical Requirements Specification .....  | 9  |
| 6.2 E.U.T. test conditions .....                      | 10 |
| 6.3 Test Environment .....                            | 12 |
| 6.4 Antenna Requirement .....                         | 12 |
| 6.5 Interference prevention function .....            | 13 |
| 6.6 Carrier sense capability .....                    | 13 |
| 6.7 Frequency Error .....                             | 14 |
| 6.8 Occupied Bandwidth (99%) .....                    | 21 |
| 6.9 Spread spectrum Bandwidth (90%) .....             | 28 |
| 6.10 Antenna Power .....                              | 35 |
| 6.11 Spurious Emissions of Tx .....                   | 45 |
| 6.12 RF accessibility .....                           | 72 |
| 6.13 Spurious Emissions of Rx .....                   | 73 |
| 7 PHOTOGRAPHS .....                                   | 84 |
| 7.1 EUT Test Setup .....                              | 84 |
| 8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....      | 85 |

## 4 General Information

### 4.1 General Description of E.U.T.

Product Name: Articulating Borescope  
Model No: TF600, F6 Pro, F8 Pro  
Test Model No: TF600  
Trade Mark: Teslong

### 4.2 Details of E.U.T.

Operating Frequency: IEEE 802.11b: 2412MHz to 2472MHz  
IEEE 802.11g/n(HT20) : 2412 MHz to 2472 MHz

Type of Modulation: 802.11b: DSSS(CCK/QPSK/BPSK)  
802.11g: OFDM(BPSK/QPSK/16QAM/64QAM)  
802.11n (HT20): OFDM (64QAM, 16QAM, QPSK, BPSK)

Transmit Data Rate: 802.11b: 1M/2M/5.5M/11M bps  
802.11g: 6M/9M/12M/18M/24M/36M/48M/54M bps  
802.11n(HT20): 7.2M/14.4M/21.7M/28.9M/43.3M/57.8M/65M/72.2M bps

Number of Channels: 802.11b: 13 Channels  
802.11g/n(HT20) : 13 Channels

Channel Separation: 5 MHz

Software version: XNY-E1206-01

Hardware version: TF600-MAIN-V2.4

Antenna Type: FPC antenna

Antenna Gain: 2.16dBi

The Max. Antenna Power: 3.7mW/MHz

Sample Type: Portable product

Power Supply: ☒ For EUT operation: Powered by DC 5V  
☐ For other: Charge by DC5.0V

Test Voltage: ☐ Normal voltage (EUT operation): DC5V  
☐ Low voltage (Normal voltage -10%):  
☐ High voltage (Normal voltage+10%):

#### 4.3 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer | Model No. | Remark |
|-------------|--------------|-----------|--------|
| /           | /            | /         | /      |

#### 4.4 Deviation from Standards

None.

#### 4.5 Abnormalities from Standard Conditions

None.

#### 4.6 Other Information Requested by the Customer

None.

#### 4.7 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District,  
Shenzhen, China

#### 4.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

## 5 Equipment Used during Test

| Test Equipment List     |                    |           |            |                           |                                                                    |                    |
|-------------------------|--------------------|-----------|------------|---------------------------|--------------------------------------------------------------------|--------------------|
| Test Equipment          | Manufacturer       | Model No. | Serial No. | Cal. date<br>(yyyy-mm-dd) | Calibration<br>body                                                | Classificati<br>on |
| Humi/ Temp<br>Indicator | ANPUHUA            | HTC-1     | 212066     | 2025/9/1                  | CCIC<br>(Shenzhen)<br>Metrology &<br>Testing<br>Service<br>Co.,Ltd | (c)                |
| Spectrum Analyzer       | Rohde &<br>Schwarz | FSU26     | 200019     | 2025/9/1                  | CCIC<br>(Shenzhen)<br>Metrology &<br>Testing<br>Service<br>Co.,Ltd | (c)                |
| Multimeter              | Fluke              | 15B       | 96710318   | 2025/9/1                  | CCIC<br>(Shenzhen)<br>Metrology &<br>Testing<br>Service<br>Co.,Ltd | (c)                |
| Signal generator        | ANRITSU            | MG3692B   | 074702     | 2025/9/1                  | CCIC<br>(Shenzhen)<br>Metrology &<br>Testing<br>Service<br>Co.,Ltd | (c)                |
| DC Power Supply         | GW                 | GPC3030D  | A671672    | 2025/9/1                  | CCIC<br>(Shenzhen)<br>Metrology &<br>Testing<br>Service<br>Co.,Ltd | (c)                |

Remark:

(a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.

(b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992) .

- (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c). From JRL Article 24-2, paragraph 4, Item 2

**Notice: Calibration duration for above equipments is 1 year.**

## 6 Test Results

### 6.1 Radio Technical Requirements Specification

**Tabel 1: Radio Technical Requirements Specification for 2.4 GHz band wide-band low-power data communication system (Item 19 of Article 2-1)**

| Items                                       | Technical standard                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Assigned frequency or designated frequency  | 2400-2483.5MHz                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Communication method                        | One-way communication, simplex, semi-duplex, or duplex operation of digital signal transmission including spread spectrum                                                                                                                                                                                                                                                                                                       |
| Tolerance of frequency ( $\times 10^{-6}$ ) | $\pm 50$                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Tolerance of occupied bandwidth             | FH : 83.5MHz or less<br>FH + DS : 83.5MHz or less<br>FH + OFDM : 83.5MHz or less<br>OFDM 40MHz System: 26~40MHz<br>Others : 26MHz or less                                                                                                                                                                                                                                                                                       |
| Antenna power                               | Designated value<br>(1) FH, FH+DS , FH+OFDM: 3mW/MHz<br>(used in the range of 2427 - 2470.75 MHz)<br>(2) OFDM , DS other than (1) 10mW/MHz<br>(3) Other than (1) & (2) 10mW<br>(4) OFDM OBW 26 - 38MHz: 5mW/MHz<br>Tolerance: +20%                                                                                                                                                                                              |
| Antenna gain                                | 1) 12.14 dBi or less in principle<br>2) In case of directional antenna<br>(1) FH, FH+DS or FH+OFDM using 2427-2470.75 MHz<br>EIRP $\leq$ 16.91 dBm/MHz<br>(2) OFDM or DS other than (1) EIRP $\leq$ 22.14 dBm/MHz<br>(3) Other than (1) and (2): 22.14 dBm or less<br>(4) OFDM OBW 26 - 40MHz: 19.14dBm/MHz<br>(5) Half-power angle of directional antenna (e) in case of the item 2): $e \leq 360/A$ (The A is 10 in maximum.) |
| Tolerance of spurious emission intensity    | for 2412-2472MHz<br>(1) Below 2387 MHz : 2.5 $\mu$ W/MHz<br>(2) 2387 to 2400 MHz : 25 $\mu$ W/MHz<br>(3) 2483.5 through 2496.5 MHz : 25 $\mu$ W/MHz<br>(4) Over 2496.5 MHz : 2.5 $\mu$ W/MHz                                                                                                                                                                                                                                    |
| Spreading bandwidth                         | DS, FH, FH+DS, FH+OFDM : 500kHz or more                                                                                                                                                                                                                                                                                                                                                                                         |
| Spreading rate of spectrum                  | For DS system; (Spreading bandwidth) / (Frequency corresponding to transmission rate) $\geq 5$                                                                                                                                                                                                                                                                                                                                  |
| Limit of secondary radiated emissions       | (1) Below 1 GHz : 4 nW<br>(2) 1 GHz or higher : 20 nW                                                                                                                                                                                                                                                                                                                                                                           |
| Interference prevention function            | Shall have the function of automatic transmission and reception of identification sign.                                                                                                                                                                                                                                                                                                                                         |
| Structure                                   | Shall be of the structure that the RF and modulator sections excluding antenna cannot easily be opened.                                                                                                                                                                                                                                                                                                                         |
| Note                                        | DS: Direct spread<br>FH: Frequency hopping<br>OFDM: Orthogonal frequency division multiplexing                                                                                                                                                                                                                                                                                                                                  |

## 6.2 E.U.T. test conditions

### Power supply:

The fluctuation of input voltage to the circuit of RF unit of test equipment is under  $\pm 1\%$ , when input voltage to the test equipment is fluctuated by  $\pm 10\%$ , So, all measurement has been conducted by only rated voltage.

| The measurement result of the voltage fluctuation at RF circuit |                              |                      |
|-----------------------------------------------------------------|------------------------------|----------------------|
|                                                                 | EUT Voltage<br>for operation | RF Circuitry Voltage |
| High voltage                                                    | 5.5V                         | 3.3V                 |
| Normal voltage                                                  | 5V                           | 3.3V                 |
| Low voltage                                                     | 4.5V                         | 3.3V                 |

### Temperature:

5 -35.0 °C

### Humidity:

45-85 % RH

### Atmospheric Pressure:

1000 -1020 mbar

### Test frequencies:

If the EUT can be set to 3 or more different (carrier) frequencies in 1 allocated band, testing shall be performed using the Lowest, Middle and the Highest frequency (L, M and H). If there are 2 or fewer frequencies, testing shall be performed with the available frequencies.

EUT channels and frequencies list:

802.11b/g/n (HT20)

| Channel | Frequency (MHz) |
|---------|-----------------|
| 1       | 2412            |
| 2       | 2417            |
| 3       | 2422            |
| 4       | 2427            |
| 5       | 2432            |
| 6       | 2437            |
| 7       | 2442            |
| 8       | 2447            |
| 9       | 2452            |
| 10      | 2457            |
| 11      | 2462            |
| 12      | 2467            |
| 13      | 2472            |

Test frequencies are the lowest channel: 1 channel(2412MHz), middle channel: 7 channel(2442 MHz) and the highest channel: 13 channel(2472 MHz)

### 6.3 Test Environment

| Operating Environment: |           |
|------------------------|-----------|
| Temperature:           | 25.5°C    |
| Humidity:              | 53 % RH   |
| Atmospheric Pressure:  | 1009 mbar |

### 6.4 Antenna Requirement

#### Standard requirement

Applicable for equipment with an antenna terminal, including testing terminals. If an antenna connector is available, all relevant tests will be carried out conducted. If not, tests will be carried out in an anechoic room or with a suitable test-fixture.



The EUT with FPC antenna, the best case gain of the ANT is 2.16dBi.

Note: An antenna connector is available, all relevant tests will be carried out conducted.

## 6.5 Interference prevention function

The device consists of the internal antenna and 2.4 GHz WIFI IC; Component IC CPU also can use the protocol function to protect interference come from outside.

The identification code is: 33:1C:4E:2D:B1:15

**Test result:** The unit does meet the requirements (Good).

## 6.6 Carrier sense capability

Conducted carrier sense function with test procedure annex table No.45 and confirmed the result was OK.

**Test result:** The unit does meet the requirements.

## 6.7 Frequency Error

Test Requirement:


Item 19 of Article 2-1

Tolerance of frequency:  $\pm 50 \times 10^{-6}$

Test Status:

Test the EUT in transmitting mode without modulation.

Test Configuration:

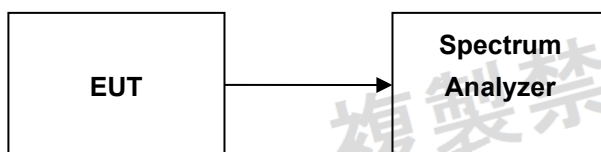

Test Procedure:

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping OFF, CW Tx

3. Spectrum Analyzer conditions:

Frequency: Test Frequency

Span 1MHz

RBW 10 kHz (Modulation OFF),

VBW 10 kHz (Modulation OFF),

Sweep Time Auto

Detector mode Positive peak


Indication mode Max hold



## Test result:


| TestCondition | TestMode  | Antenna | Freq(MHz) | CenterFreq<br>[MHz] | Result[ppm] | Limit[ppm] | Verdict |
|---------------|-----------|---------|-----------|---------------------|-------------|------------|---------|
| NTNV          | 11B       | Ant1    | 2412      | 2411.997            | -1.24378    | ±50        | PASS    |
|               |           |         | 2442      | 2442                | 0.00000     | ±50        | PASS    |
|               |           |         | 2472      | 2471.998            | -0.80906    | ±50        | PASS    |
|               | 11G       | Ant1    | 2412      | 2411.998            | -0.82919    | ±50        | PASS    |
|               |           |         | 2442      | 2441.997            | -1.22850    | ±50        | PASS    |
|               |           |         | 2472      | 2471.997            | -1.21359    | ±50        | PASS    |
|               | 11N20SISO | Ant1    | 2412      | 2411.996            | -1.65838    | ±50        | PASS    |
|               |           |         | 2442      | 2441.996            | -1.63800    | ±50        | PASS    |
|               |           |         | 2472      | 2471.996            | -1.61812    | ±50        | PASS    |

Note: The nominal frequency shall be confirmed by the applicant and test lab.


Result plot as follows:

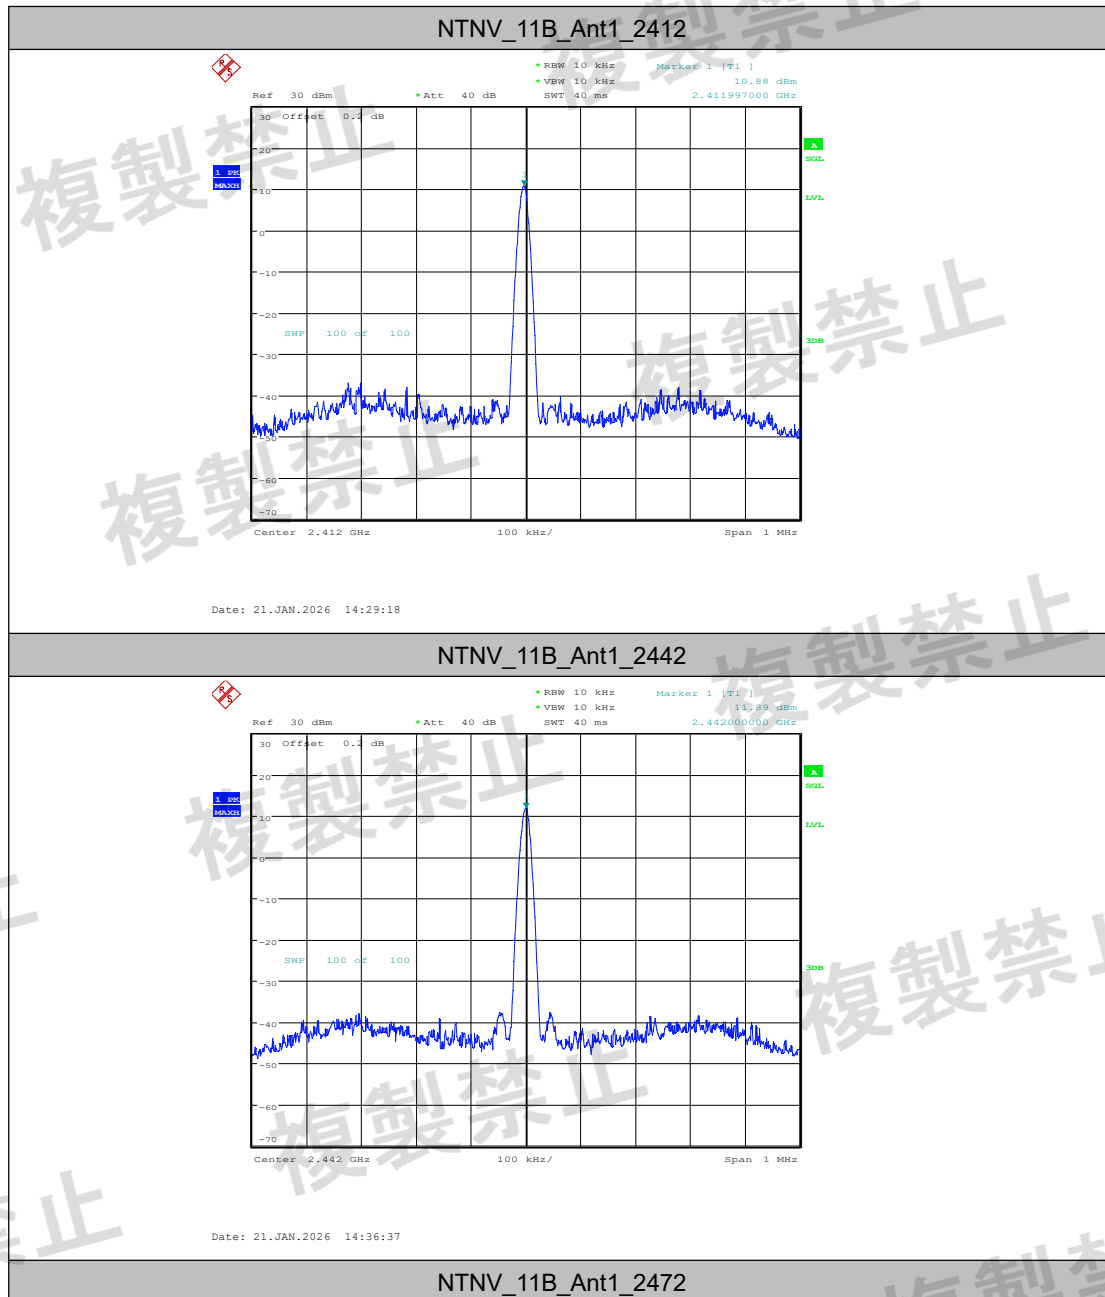

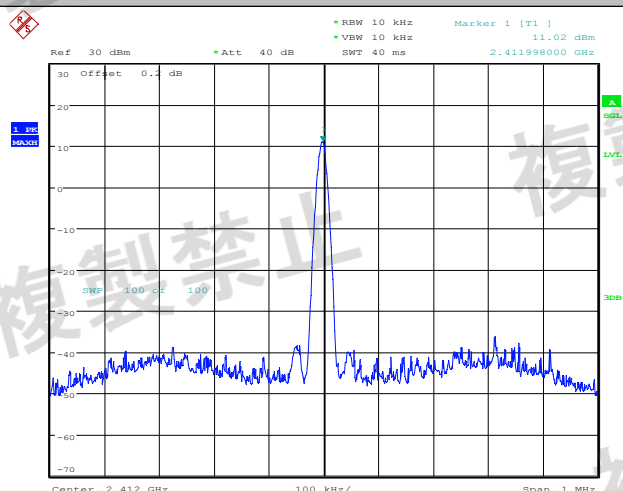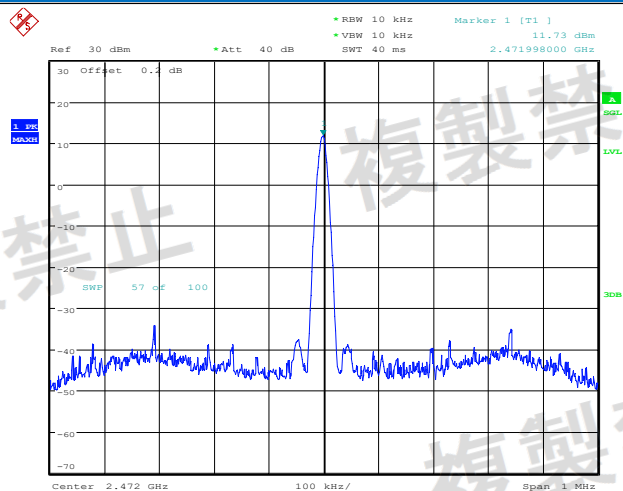


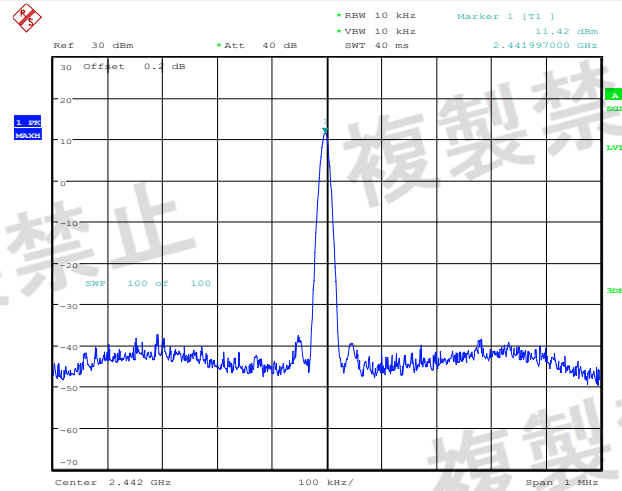


NTVN\_11G\_Ant1\_2472

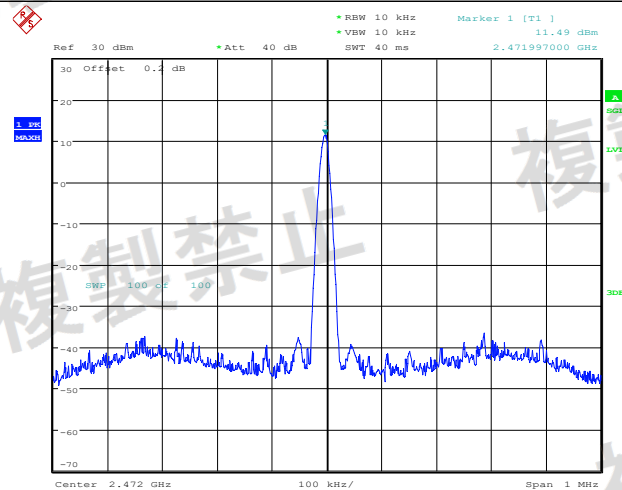


NTVN\_11N20SISO\_Ant1\_2412

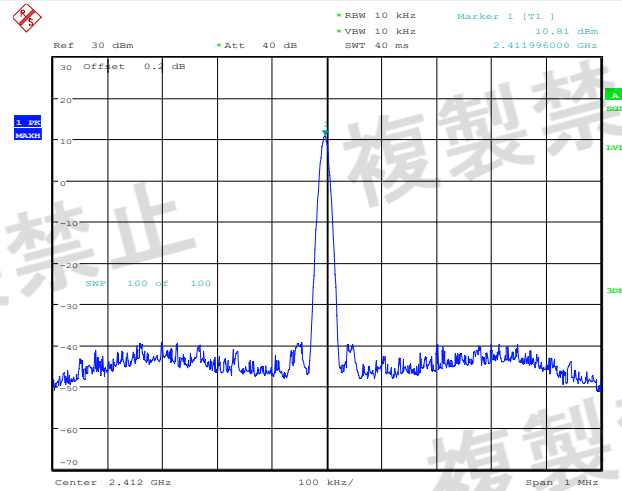

NTNV\_11N20SISO\_Ant1\_2442

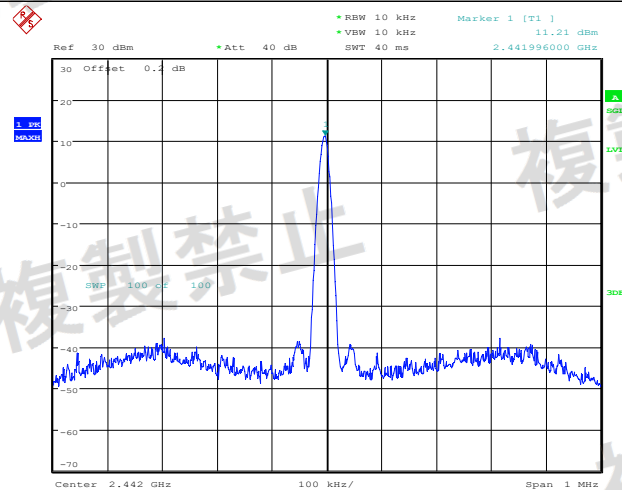

NTNV\_11N20SISO\_Ant1\_2472

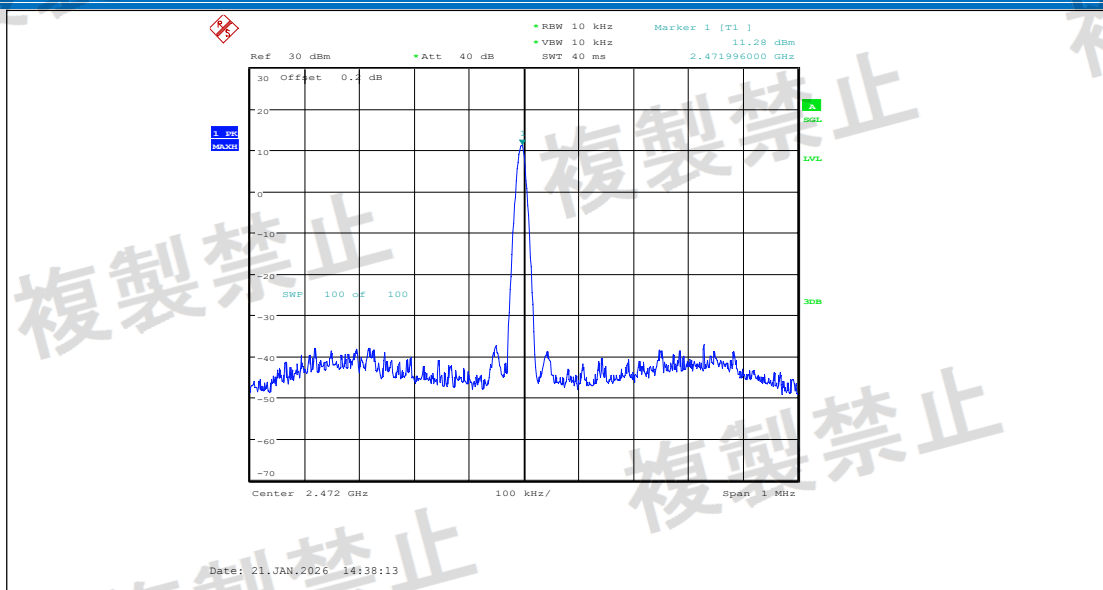

Test result: The unit does meet the requirements.

## 6.8 Occupied Bandwidth (99%)

Test Requirement:

Item 19 of Article 2-1

DSSS: 26 MHz or less

OFDM 20MHz System: 26 MHz or less

OFDM 40MHz System: 26~40 MHz or less

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:



Test Procedure:

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Frequency: Test Frequency

Span 40MHz/60MHz (DSSS,OFDM)

RBW 300 kHz

VBW 300 kHz

Sweep Time Auto

detector mode Positive peak


Indication mode Max hold


OBW 99%

Test result:

| TestCondition | TestMode      | Antenna | Freq(MHz) | Result [MHz] | Limit [MHz] | Verdict |
|---------------|---------------|---------|-----------|--------------|-------------|---------|
| NTNV          | 11B           | Ant1    | 2412      | 13.440       | ≤26         | PASS    |
|               |               |         | 2442      | 13.440       | ≤26         | PASS    |
|               |               |         | 2472      | 13.520       | ≤26         | PASS    |
|               | 11G           | Ant1    | 2412      | 16.760       | ≤26         | PASS    |
|               |               |         | 2442      | 16.720       | ≤26         | PASS    |
|               |               |         | 2472      | 16.760       | ≤26         | PASS    |
|               | 11N20SI<br>SO | Ant1    | 2412      | 17.800       | ≤26         | PASS    |
|               |               |         | 2442      | 17.880       | ≤26         | PASS    |
|               |               |         | 2472      | 17.880       | ≤26         | PASS    |


Result plot as follows:

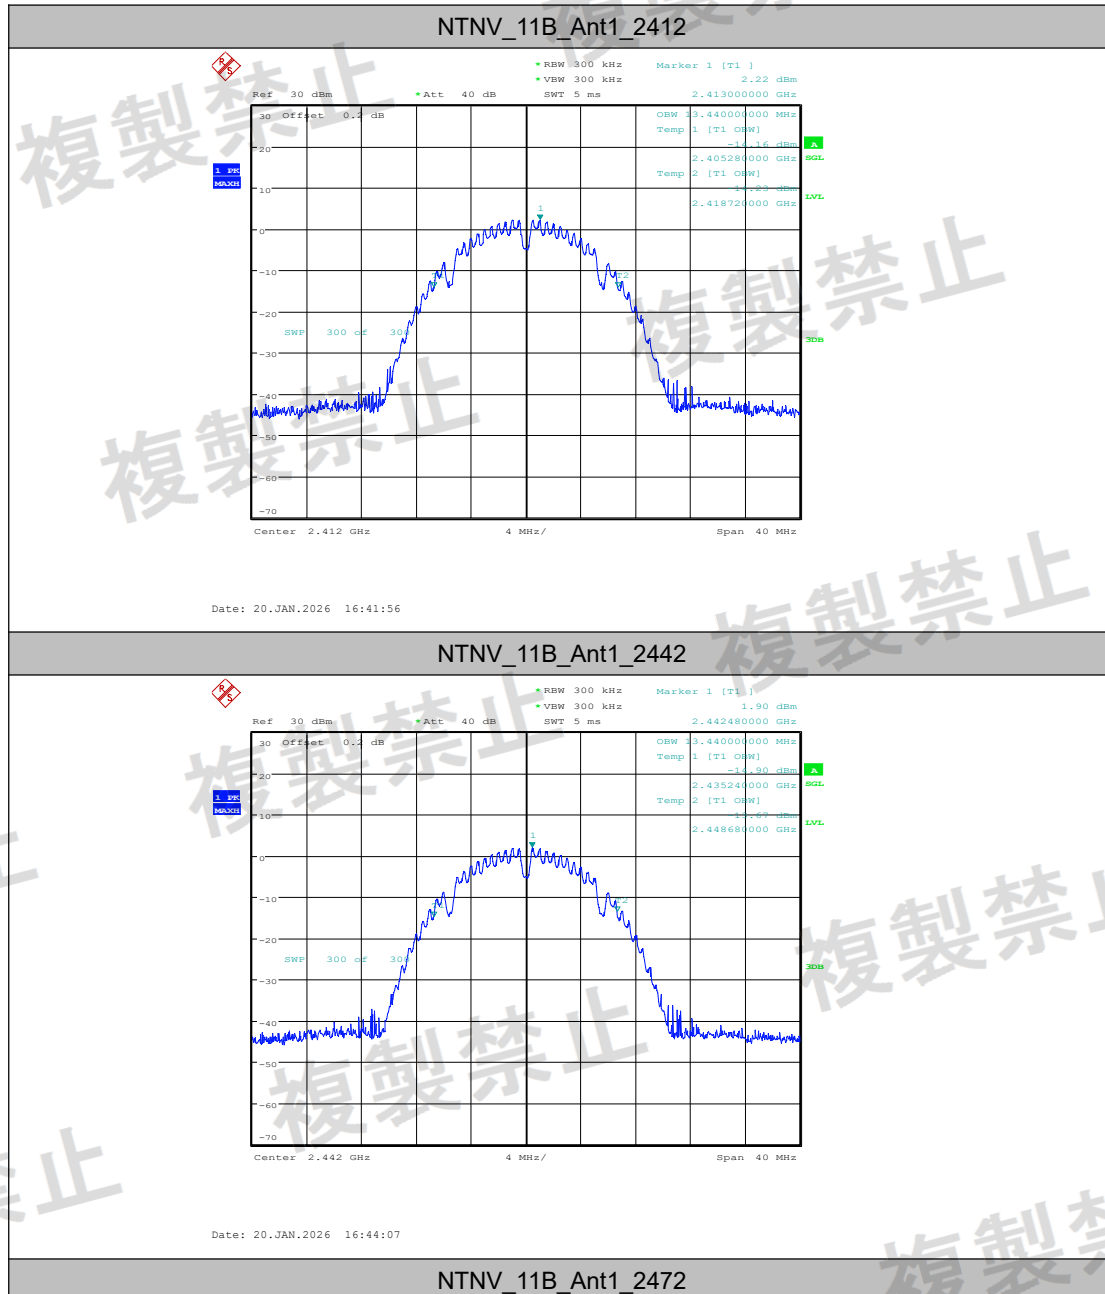

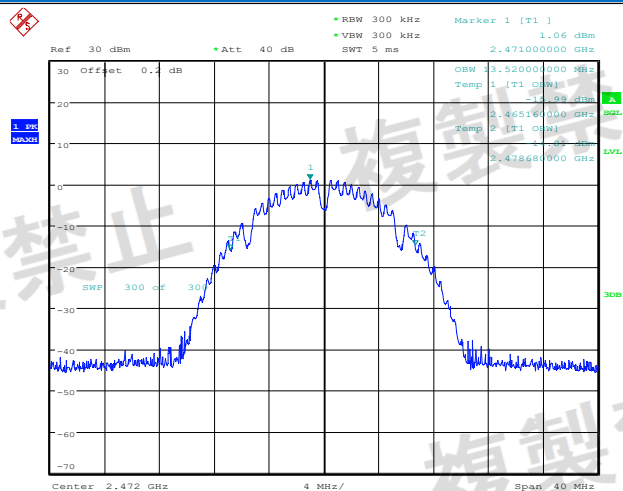


Date: 20.JAN.2026 16:47:07

### NTNV\_11G\_Ant1\_2412

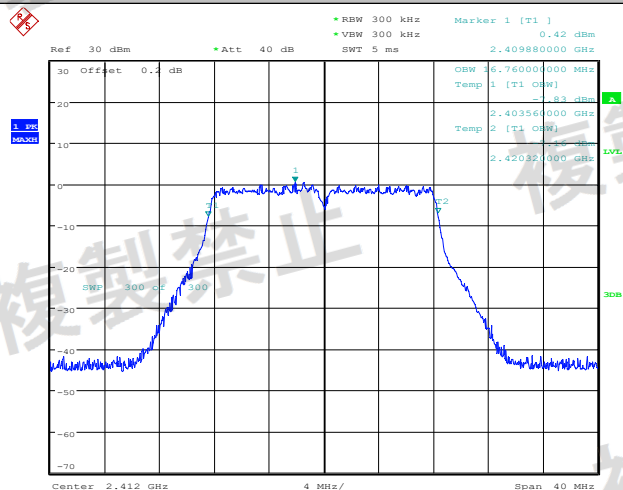


Date: 20.JAN.2026 16:50:21

### NTNV\_11G\_Ant1\_2442

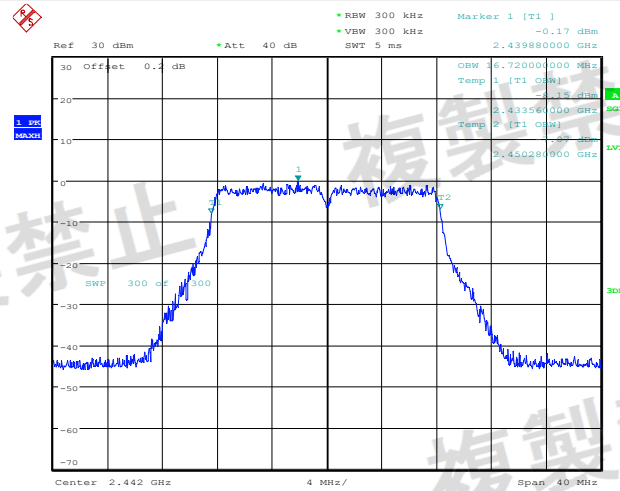


Date: 20.JAN.2026 16:53:56

### NTVN\_11G\_Ant1\_2472

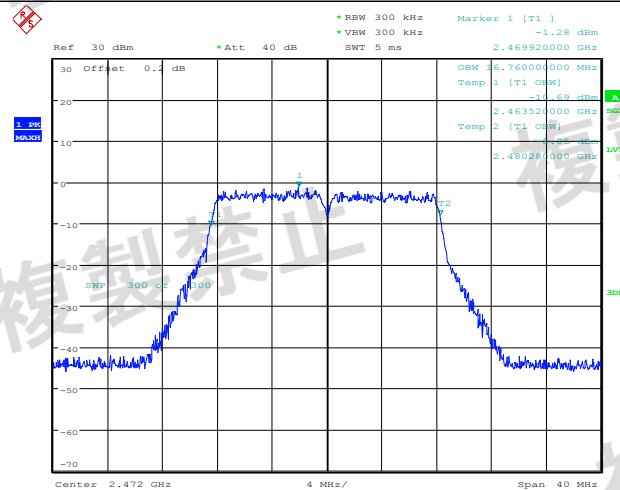


Date: 20.JAN.2026 16:57:45

### NTVN\_11N20SISO\_Ant1\_2412

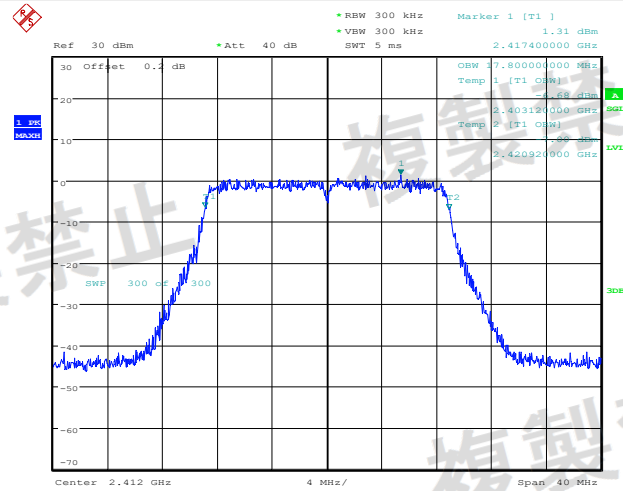


Date: 20.JAN.2026 18:05:58

NTNV\_11N20SISO\_Ant1\_2442

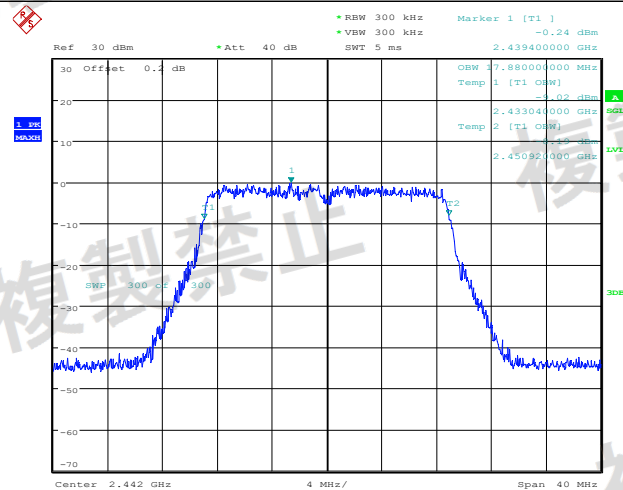

Date: 20.JAN.2026 18:08:30

NTNV\_11N20SISO\_Ant1\_2472

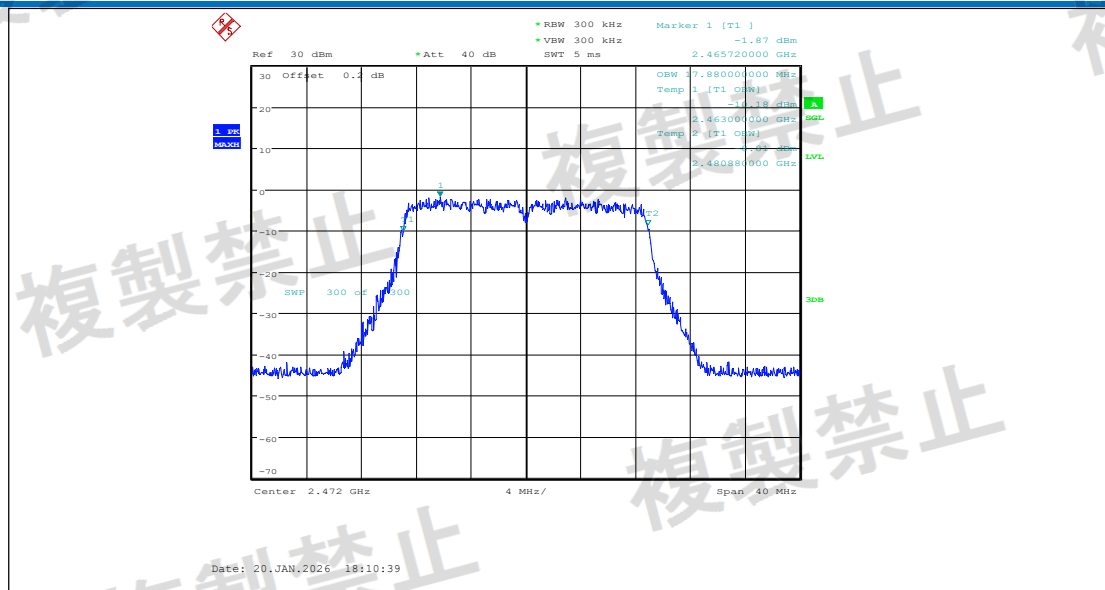

## 6.9 Spread spectrum Bandwidth (90%)

Test Requirement: Item 19 of Article 2-1  
500 kHz or more

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:



Test Procedure:

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Frequency: Test Frequency

Span 40MHz/60MHz (DSSS, OFDM)

RBW 300kHz

VBW 300kHz

Sweep Time Auto

detector mode Positive peak

Indication mode Max hold

OBW 90%


**Test result:**


| TestCondition | TestMode      | Antenna | Freq(MHz) | Result [MHz] | Limit [MHz] | Spread Factor | Limit | Verdict |
|---------------|---------------|---------|-----------|--------------|-------------|---------------|-------|---------|
| NTNV          | 11B           | Ant1    | 2412      | 8.800        | ≥0.5        | 6.400         | >5    | PASS    |
|               |               |         | 2442      | 8.800        | ≥0.5        | 6.400         | >5    | PASS    |
|               |               |         | 2472      | 8.760        | ≥0.5        | 6.371         | >5    | PASS    |
|               | 11G           | Ant1    | 2412      | 14.880       | ≥0.5        | ---           | ---   | PASS    |
|               |               |         | 2442      | 14.800       | ≥0.5        | ---           | ---   | PASS    |
|               |               |         | 2472      | 14.800       | ≥0.5        | ---           | ---   | PASS    |
|               | 11N20SI<br>SO | Ant1    | 2412      | 15.640       | ≥0.5        | ---           | ---   | PASS    |
|               |               |         | 2442      | 15.720       | ≥0.5        | ---           | ---   | PASS    |
|               |               |         | 2472      | 15.640       | ≥0.5        | ---           | ---   | PASS    |

**Remark:**

1. Spreading factor = Spread bandwidth/ Transmission rate
2. 802.11b max rate of 11Mbps, Transmission rate= max rate/8


Result plot as follows:

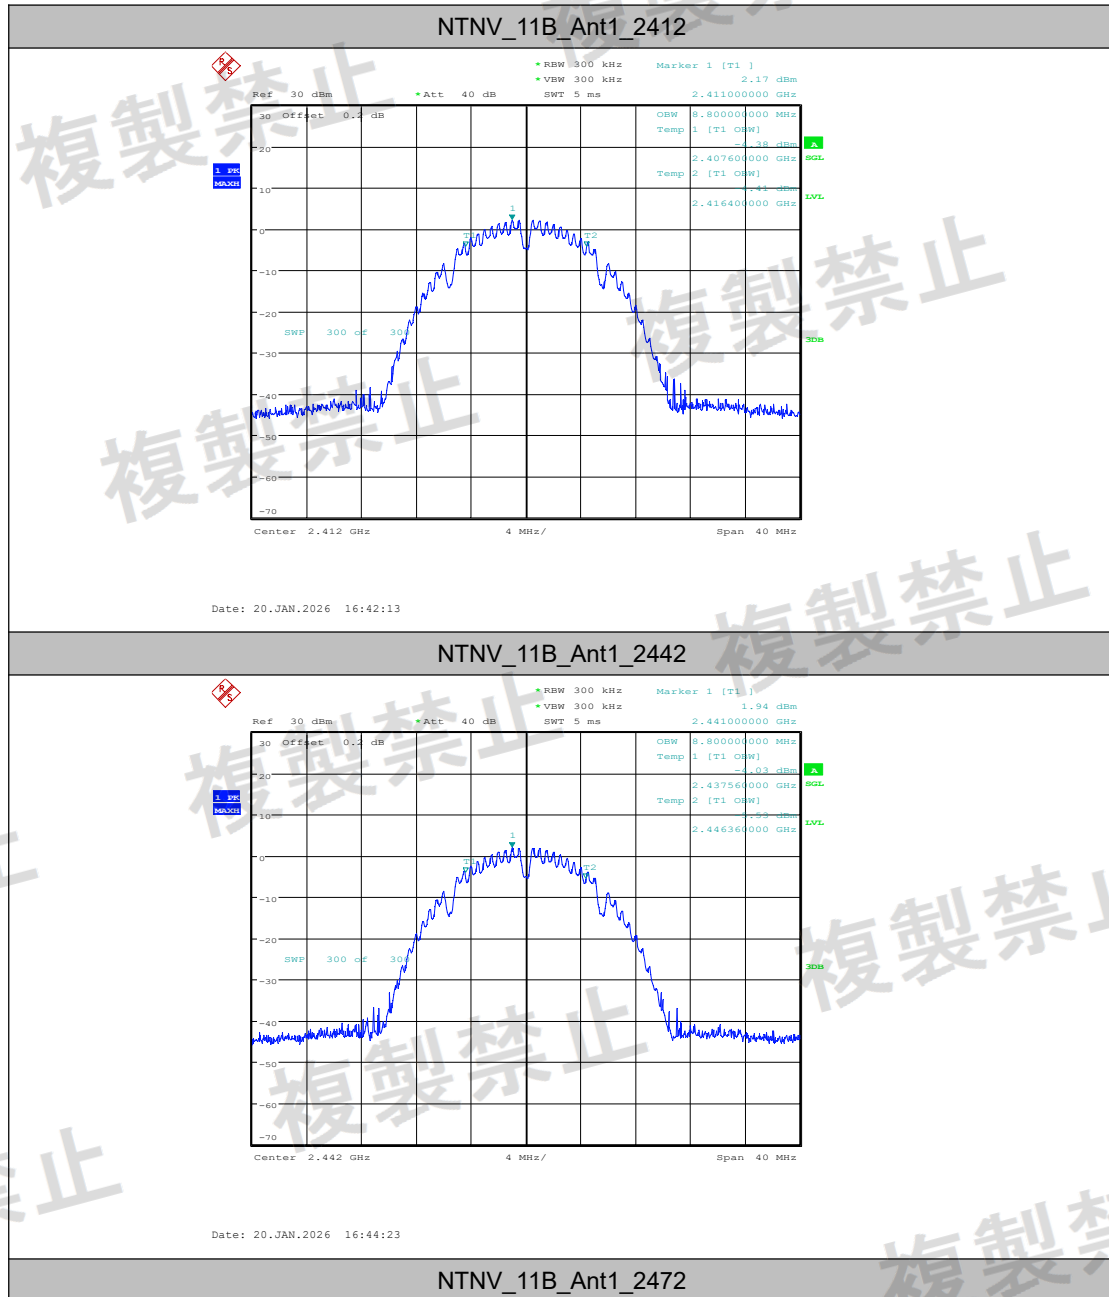

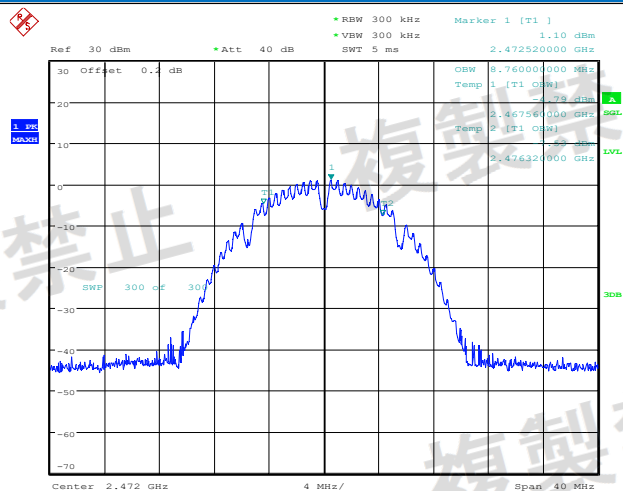


Date: 20.JAN.2026 16:47:23

NTNV\_11G\_Ant1\_2412

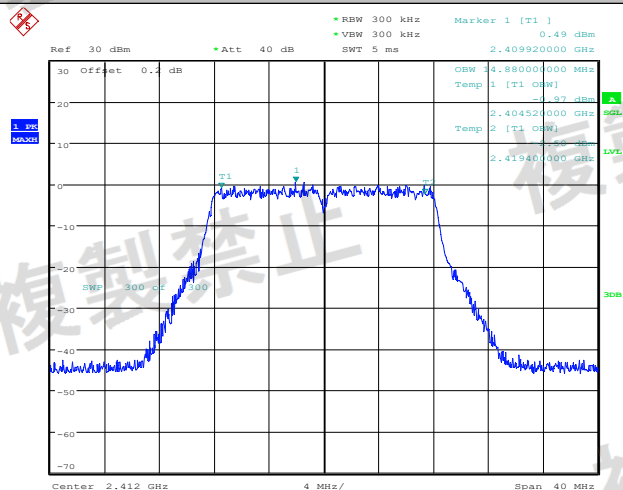


Date: 20.JAN.2026 16:50:38

NTNV\_11G\_Ant1\_2442

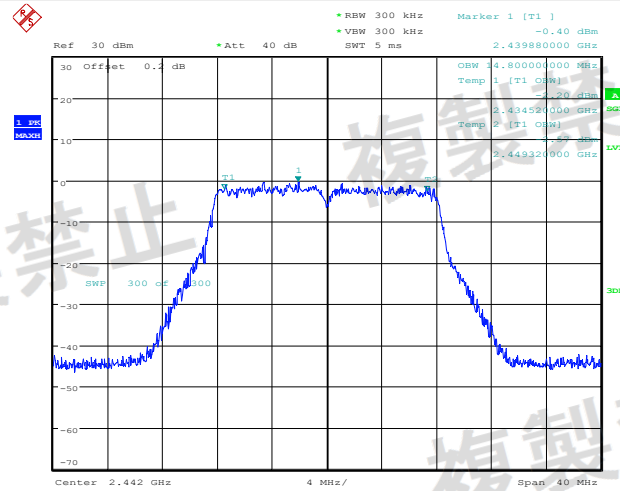


Date: 20.JAN.2026 16:54:12

### NTNV\_11G\_Ant1\_2472

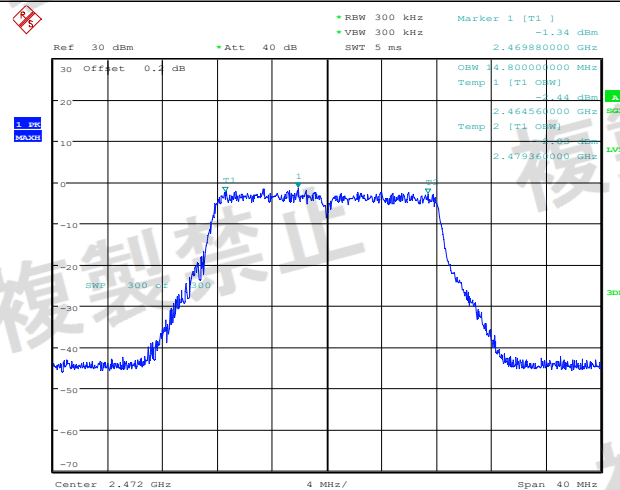


Date: 20.JAN.2026 16:58:01

### NTNV\_11N20SISO\_Ant1\_2412

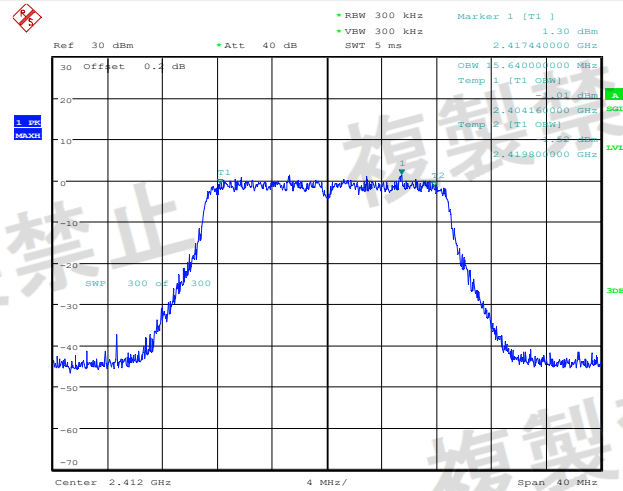

Date: 20.JAN.2026 18:06:15

NTNV\_11N20SISO\_Ant1\_2442

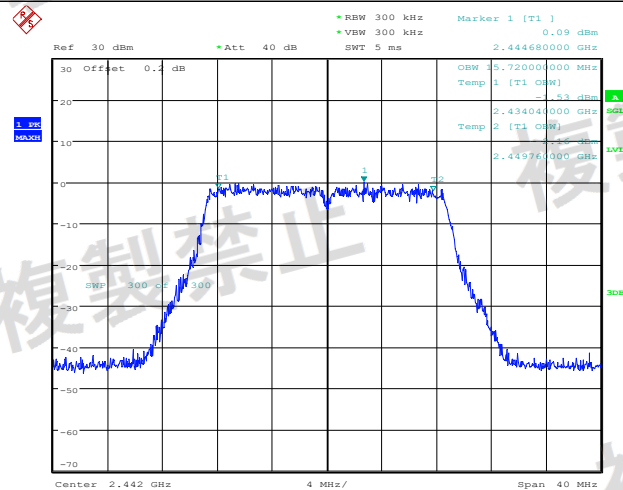

Date: 20.JAN.2026 18:08:46

NTNV\_11N20SISO\_Ant1\_2472



## 6.10 Antenna Power

Test Requirement:

Item 19 of Article 2-1  
10mW/MHz or less

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:



Test Procedure:

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Frequency: Test Frequency

Span 40 MHz/60MHz (DSSS,OFDM)

RBW 1 MHz

VBW 1 MHz

Sweep Time Auto

detector mode Positive peak

Indication mode Max hold

Test result:

| Antenna Power  |            |         |            |                  |                 |                |         |
|----------------|------------|---------|------------|------------------|-----------------|----------------|---------|
| Test Condition | Test Mode  | Antenna | Freq(M Hz) | Result (dBm/MHz) | Result (mW/MHz) | Limit (mW/MHz) | Verdict |
| NTNV           | 11B        | Ant1    | 2412       | 5.73             | 3.74            | ≤10            | PASS    |
|                |            |         | 2442       | 5.08             | 3.22            | ≤10            | PASS    |
|                |            |         | 2472       | 4.16             | 2.61            | ≤10            | PASS    |
|                | 11G        | Ant1    | 2412       | 5.42             | 3.48            | ≤10            | PASS    |
|                |            |         | 2442       | 4.94             | 3.12            | ≤10            | PASS    |
|                |            |         | 2472       | 4.21             | 2.64            | ≤10            | PASS    |
|                | 11N20SI SO | Ant1    | 2412       | 6.43             | 4.40            | ≤10            | PASS    |
|                |            |         | 2442       | 5.76             | 3.77            | ≤10            | PASS    |
|                |            |         | 2472       | 4.06             | 2.55            | ≤10            | PASS    |


| Tolerance      |            |         |           |                |                     |            |           |         |
|----------------|------------|---------|-----------|----------------|---------------------|------------|-----------|---------|
| Test Condition | Test Mode  | Antenna | Freq(MHz) | Power (mW/MHz) | RatedPower (mW/MHz) | Result (%) | Limit (%) | Verdict |
| NTNV           | 11B        | Ant1    | 2412      | 3.74           | 3.7                 | 1.08       | +20       | PASS    |
|                |            |         | 2442      | 3.22           | 3.7                 | -12.97     | +20       | PASS    |
|                |            |         | 2472      | 2.61           | 3.7                 | -29.46     | +20       | PASS    |
|                | 11G        | Ant1    | 2412      | 3.48           | 3.7                 | -5.95      | +20       | PASS    |
|                |            |         | 2442      | 3.12           | 3.7                 | -15.68     | +20       | PASS    |
|                |            |         | 2472      | 2.64           | 3.7                 | -28.65     | +20       | PASS    |
|                | 11N20SI SO | Ant1    | 2412      | 4.40           | 3.7                 | 18.92      | +20       | PASS    |
|                |            |         | 2442      | 3.77           | 3.7                 | 1.89       | +20       | PASS    |
|                |            |         | 2472      | 2.55           | 3.7                 | -31.08     | +20       | PASS    |



| EIRP           |            |         |            |                 |               |                |         |
|----------------|------------|---------|------------|-----------------|---------------|----------------|---------|
| Test Condition | Test Mode  | Antenna | Freq(M Hz) | Result(dBm/MHz) | EIRP(dBm/MHz) | Limit(dBm/MHz) | Verdict |
| NTNV           | 11B        | Ant1    | 2412       | 5.73            | 7.89          | ≤12.14         | PASS    |
|                |            |         | 2442       | 5.08            | 7.24          | ≤12.14         | PASS    |
|                |            |         | 2472       | 4.16            | 6.32          | ≤12.14         | PASS    |
|                | 11G        | Ant1    | 2412       | 5.42            | 7.58          | ≤12.14         | PASS    |
|                |            |         | 2442       | 4.94            | 7.1           | ≤12.14         | PASS    |
|                |            |         | 2472       | 4.21            | 6.37          | ≤12.14         | PASS    |
|                | 11N20SI SO | Ant1    | 2412       | 6.43            | 8.59          | ≤12.14         | PASS    |
|                |            |         | 2442       | 5.76            | 7.92          | ≤12.14         | PASS    |
|                |            |         | 2472       | 4.06            | 6.22          | ≤12.14         | PASS    |

Remark:


Rated power: 3.7mW/MHz


Result plot as follows:

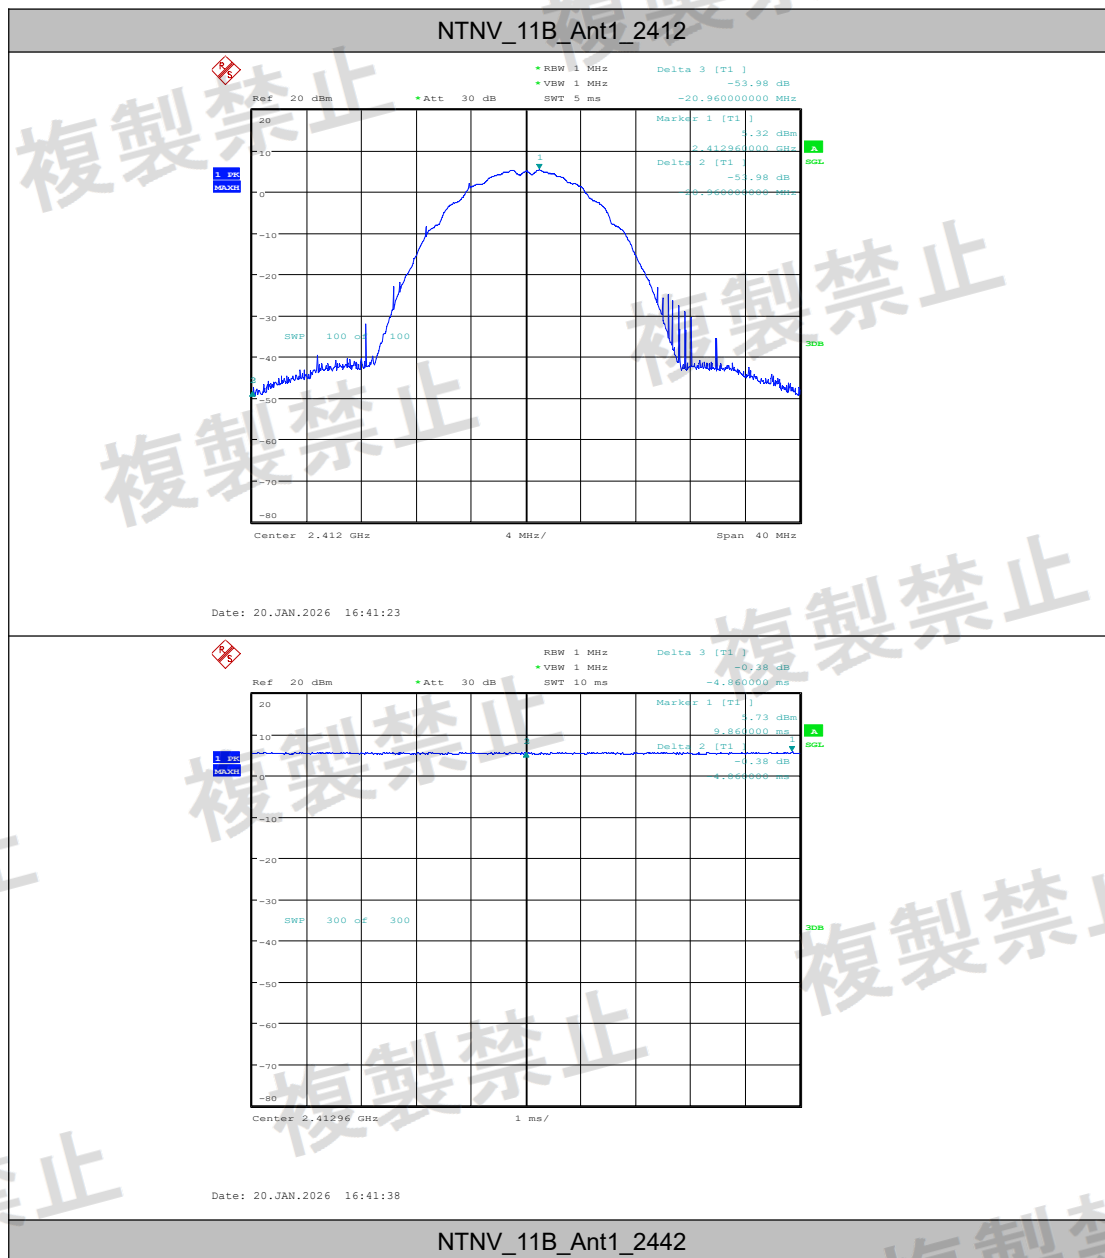

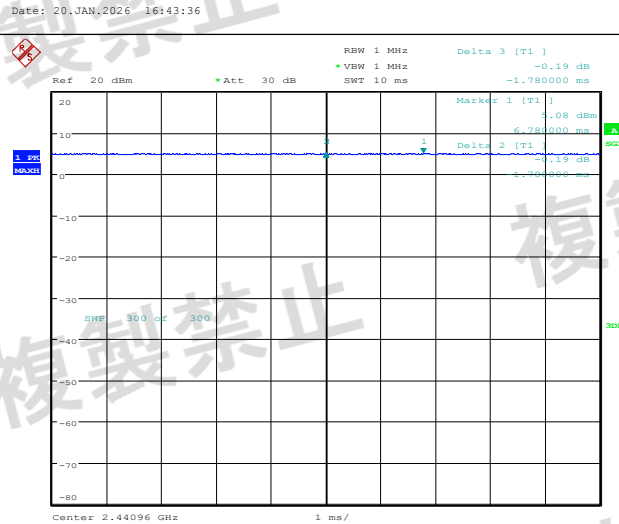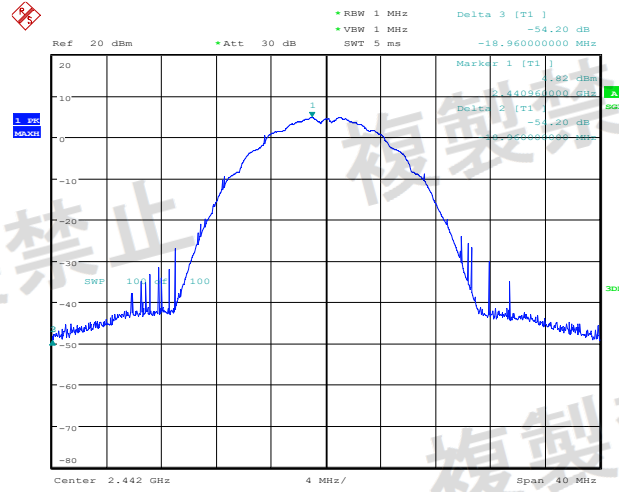


NTNV\_11B\_Ant1\_2472

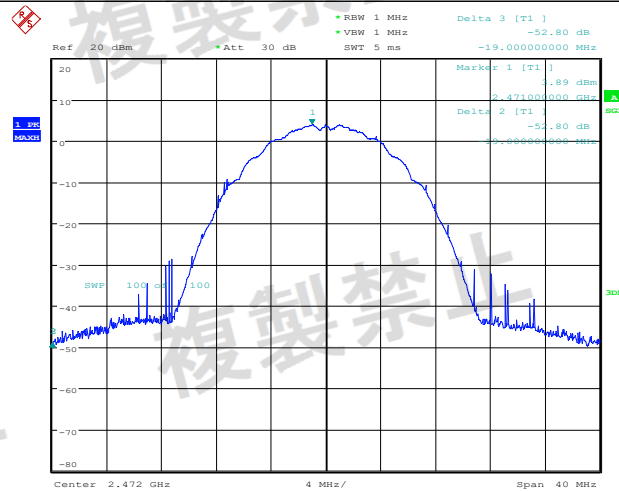

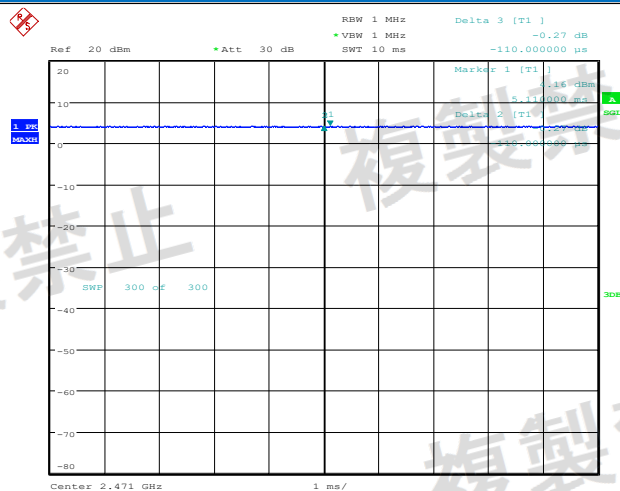


Date: 20.JAN.2026 16:46:50


## NTNV 11G Ant1 2412


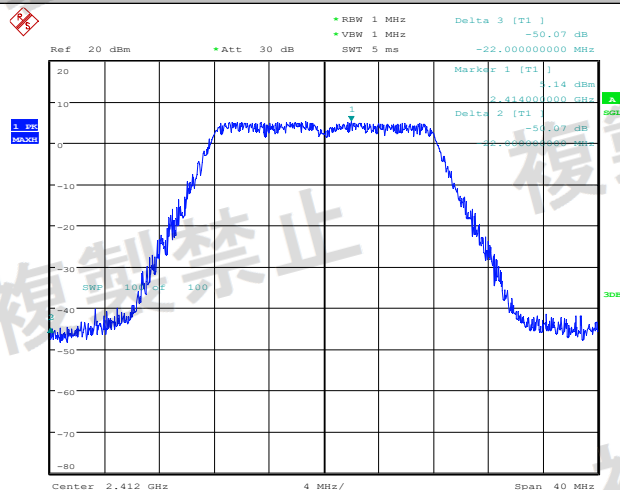


Date: 20.JAN.2026 16:49:06

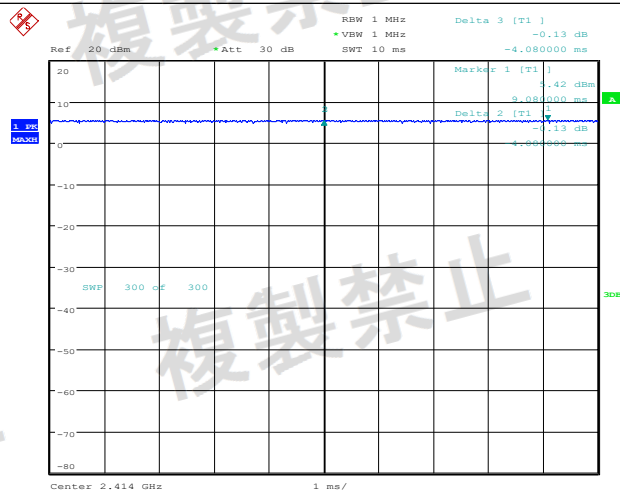

Date: 20.JAN.2026 16:49:39

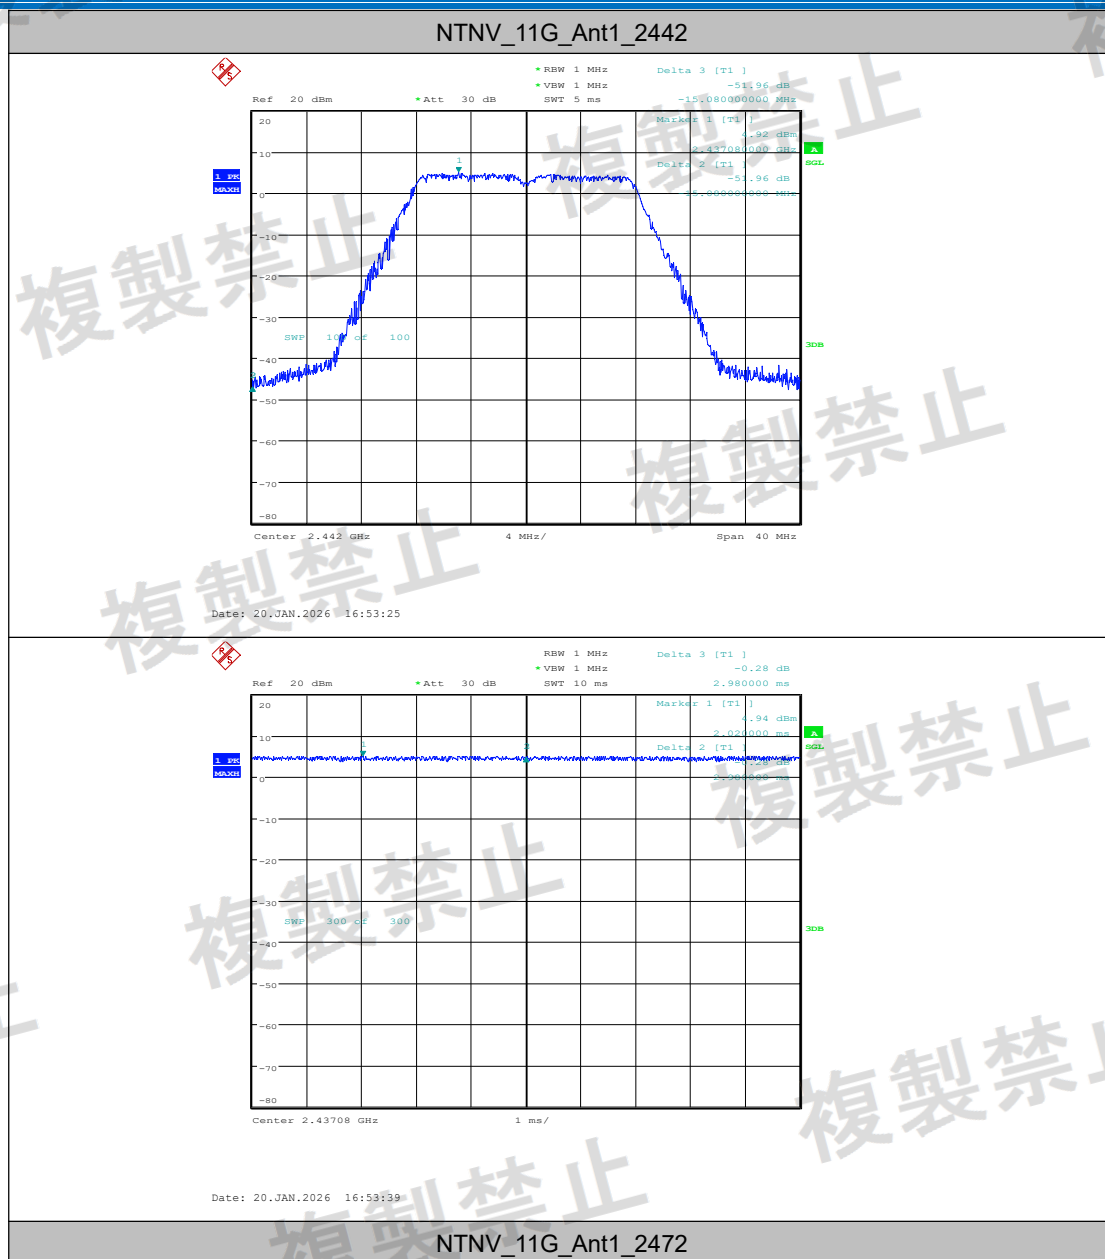


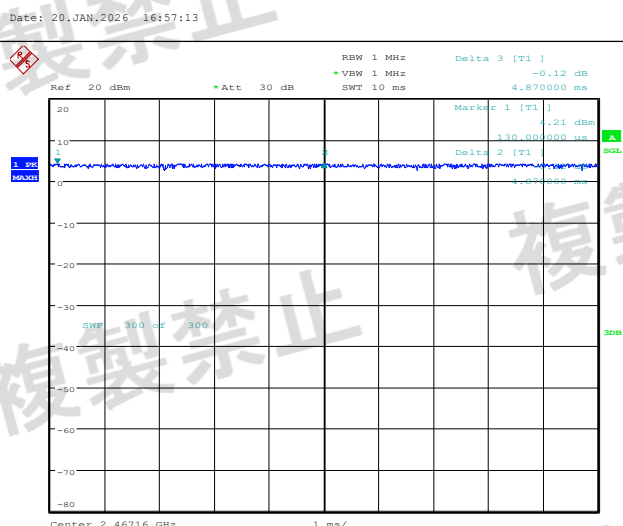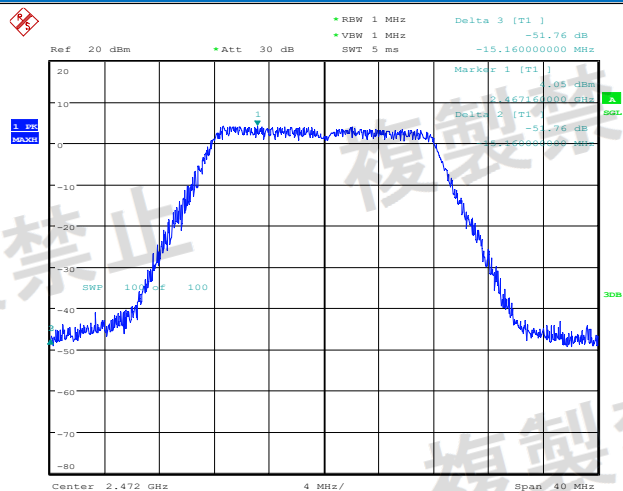


Date: 20.JAN.2026 16:57:13

Date: 20.JAN.2026 16:57:28

### NTNV\_11N20SISO\_Ant1\_2412

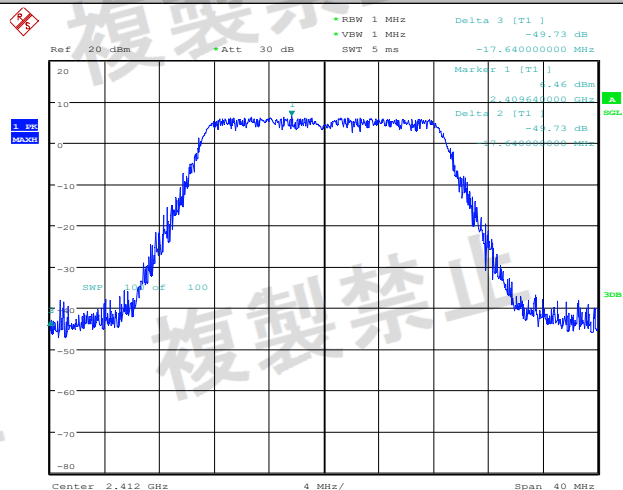


Date: 20.JAN.2026 18:05:25

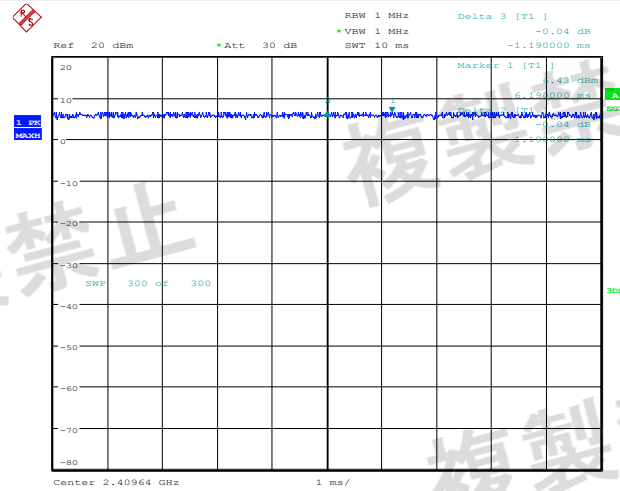


Date: 20.JAN.2026 18:05:40

### NTNV\_11N20SISO\_Ant1\_2442


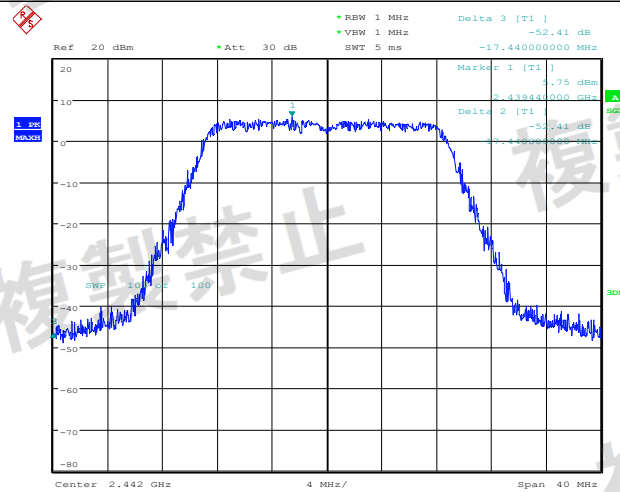


Date: 20.JAN.2026 18:07:59

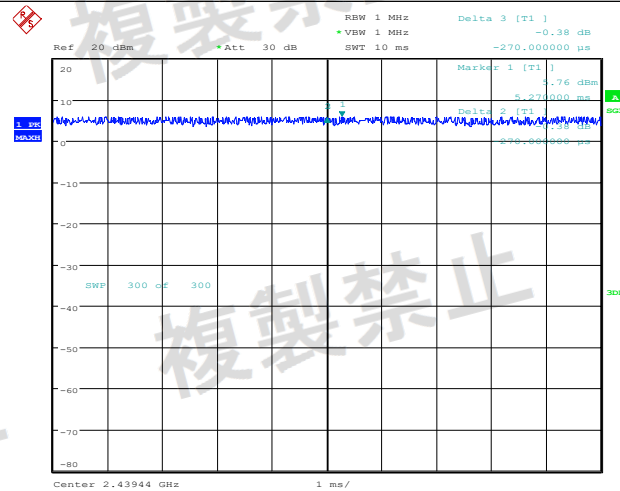

Date: 20.JAN.2026 18:08:13

NTNV\_11N20SISO\_Ant1\_2472

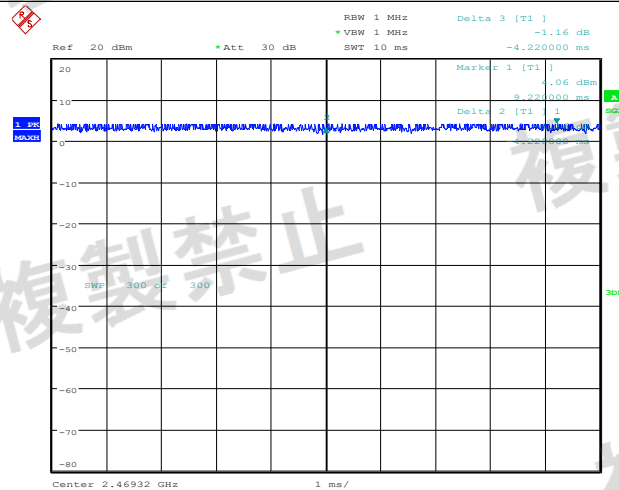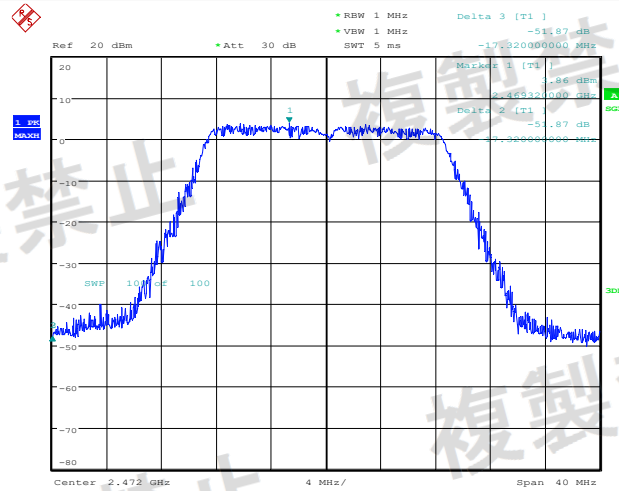

## 6.11 Spurious Emissions of Tx

Test Requirement:

Item 19 of Article 2-1

for 2412-2472MHz

(1) Below 2387 MHz : 2.5 $\mu$ W/MHz

(2) 2387 to 2400 MHz : 25 $\mu$ W/MHz

(3) 2483.5 through 2496.5 MHz : 25 $\mu$ W/MHz

(4) Over 2496.5 MHz : 2.5 $\mu$ W/MHz

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:



Test Procedure:

1. Test Conditions:

Spectrum Analyzer is used for measurement.

2. EUT conditions:

Modulation/Spread/Hopping ON

For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.

3. Spectrum Analyzer conditions:

Step 1

All spurious are measured from 30 MHz to 13 GHz by peak mode.

Step 2

IF the value measured by Step1 is 2 dB or less, measure in average mode.

Test setup for Step 1:

Frequency: 30 MHz – 1000 MHz

RBW 100 KHz

VBW 100 KHz

Sweep Time Auto

detector mode Positive peak

Indication mode Max hold

Frequency: 1000 MHz – 2400 MHz , 2483.5 MHz –13 GHz

RBW 1 MHz

VBW 1 MHz

Sweep Time Auto

detector mode Positive peak

Indication mode Max hold

Test setup for Step 2:

Frequency: Spurious Frequency

RBW 1 MHz

VBW 1 MHz

Sweep Time Auto


detector mode Sample


Indication mode Max hold

| Test Condition | TestMode      | Channel (MHz) | Freq.Range [MHz] | Freq (MHz) | Result [dBm/MHz] | Limit [dBm/MHz] | Result [μW/MHz] | Limit [μW/MHz] | Verdict |
|----------------|---------------|---------------|------------------|------------|------------------|-----------------|-----------------|----------------|---------|
| NTNV           | 11B           | 2412          | 30~1000          | 97.78      | -43.85           | ≤-26            | 0.04121         | ≤2.5           | PASS    |
|                |               |               | 1000~2387        | 1935.18    | -41.56           | ≤-26            | 0.06982         | ≤2.5           | PASS    |
|                |               |               | 2387~2400        | 2399.88    | -29.82           | ≤-16            | 1.04232         | ≤25            | PASS    |
|                |               |               | 2483.5~2496.5    | 2493.66    | -45.89           | ≤-16            | 0.02576         | ≤25            | PASS    |
|                |               |               | 2496.5~13000     | 7235.68    | -52.09           | ≤-26            | 0.00618         | ≤2.5           | PASS    |
|                |               | 2442          | 30~1000          | 127.73     | -45.14           | ≤-26            | 0.03062         | ≤2.5           | PASS    |
|                |               |               | 1000~2387        | 2360.65    | -47.12           | ≤-26            | 0.01941         | ≤2.5           | PASS    |
|                |               |               | 2387~2400        | 2389.53    | -46.58           | ≤-16            | 0.02198         | ≤25            | PASS    |
|                |               |               | 2483.5~2496.5    | 2495.51    | -45.93           | ≤-16            | 0.02553         | ≤25            | PASS    |
|                |               |               | 2496.5~13000     | 7326.53    | -51.66           | ≤-26            | 0.00682         | ≤2.5           | PASS    |
|                |               | 2472          | 30~1000          | 157.68     | -45.97           | ≤-26            | 0.02529         | ≤2.5           | PASS    |
|                |               |               | 1000~2387        | 2210.68    | -47.05           | ≤-26            | 0.01972         | ≤2.5           | PASS    |
|                |               |               | 2387~2400        | 2388.36    | -46.20           | ≤-16            | 0.02399         | ≤25            | PASS    |
|                |               |               | 2483.5~2496.5    | 2483.50    | -29.62           | ≤-16            | 1.09144         | ≤25            | PASS    |
|                |               |               | 2496.5~13000     | 2549.54    | -55.19           | ≤-26            | 0.00303         | ≤2.5           | PASS    |
|                | 11G           | 2412          | 30~1000          | 98.02      | -53.08           | ≤-26            | 0.00492         | ≤2.5           | PASS    |
|                |               |               | 1000~2387        | 2383.01    | -46.92           | ≤-26            | 0.02032         | ≤2.5           | PASS    |
|                |               |               | 2387~2400        | 2399.99    | -22.13           | ≤-16            | 6.12350         | ≤25            | PASS    |
|                |               |               | 2483.5~2496.5    | 2496.15    | -45.03           | ≤-16            | 0.03141         | ≤25            | PASS    |
|                |               |               | 2496.5~13000     | 2497.03    | -50.45           | ≤-26            | 0.00902         | ≤2.5           | PASS    |
|                |               | 2442          | 30~1000          | 126.76     | -56.95           | ≤-26            | 0.00202         | ≤2.5           | PASS    |
|                |               |               | 1000~2387        | 2359.61    | -47.36           | ≤-26            | 0.01837         | ≤2.5           | PASS    |
|                |               |               | 2387~2400        | 2399.79    | -45.21           | ≤-16            | 0.03013         | ≤25            | PASS    |
|                |               |               | 2483.5~2496.5    | 2495.36    | -46.32           | ≤-16            | 0.02333         | ≤25            | PASS    |
|                |               |               | 2496.5~13000     | 2520.66    | -50.63           | ≤-26            | 0.00865         | ≤2.5           | PASS    |
|                |               | 2472          | 30~1000          | 156.95     | -56.20           | ≤-26            | 0.00240         | ≤2.5           | PASS    |
|                |               |               | 1000~2387        | 2386.83    | -46.70           | ≤-26            | 0.02138         | ≤2.5           | PASS    |
|                |               |               | 2387~2400        | 2399.99    | -44.06           | ≤-16            | 0.03926         | ≤25            | PASS    |
|                |               |               | 2483.5~2496.5    | 2483.50    | -22.88           | ≤-16            | 5.15229         | ≤25            | PASS    |
|                |               |               | 2496.5~13000     | 2610.99    | -46.43           | ≤-26            | 0.02275         | ≤2.5           | PASS    |
|                | 11N20SI<br>SO | 2412          | 30~1000          | 94.02      | -53.82           | ≤-26            | 0.00415         | ≤2.5           | PASS    |
|                |               |               | 1000~2387        | 2386.83    | -44.11           | ≤-26            | 0.03882         | ≤2.5           | PASS    |
|                |               |               | 2387~2400        | 2399.99    | -19.82           | ≤-16            | 10.4231<br>7    | ≤25            | PASS    |
|                |               |               | 2483.5~2496.5    | 2484.93    | -44.60           | ≤-16            | 0.03467         | ≤25            | PASS    |
|                |               |               | 2496.5~13000     | 7230.43    | -49.11           | ≤-26            | 0.01227         | ≤2.5           | PASS    |
|                |               | 2442          | 30~1000          | 127.49     | -53.75           | ≤-26            | 0.00422         | ≤2.5           | PASS    |
|                |               |               | 1000~2387        | 2364.81    | -46.40           | ≤-26            | 0.02291         | ≤2.5           | PASS    |

|  |  |      |               |         |        |      |         |      |      |
|--|--|------|---------------|---------|--------|------|---------|------|------|
|  |  |      | 2387~2400     | 2397.24 | -45.05 | ≤-16 | 0.03126 | ≤25  | PASS |
|  |  |      | 2483.5~2496.5 | 2487.01 | -45.98 | ≤-16 | 0.02523 | ≤25  | PASS |
|  |  |      | 2496.5~13000  | 7326.53 | -50.64 | ≤-26 | 0.00863 | ≤2.5 | PASS |
|  |  | 2472 | 30~1000       | 157.56  | -57.60 | ≤-26 | 0.00174 | ≤2.5 | PASS |
|  |  |      | 1000~2387     | 2384.92 | -47.46 | ≤-26 | 0.01795 | ≤2.5 | PASS |
|  |  |      | 2387~2400     | 2397.79 | -44.86 | ≤-16 | 0.03266 | ≤25  | PASS |
|  |  |      | 2483.5~2496.5 | 2483.52 | -21.83 | ≤-16 | 6.56145 | ≤25  | PASS |
|  |  |      | 2496.5~13000  | 2559.52 | -54.16 | ≤-26 | 0.00384 | ≤2.5 | PASS |


### 6.11.1 Test Graphs

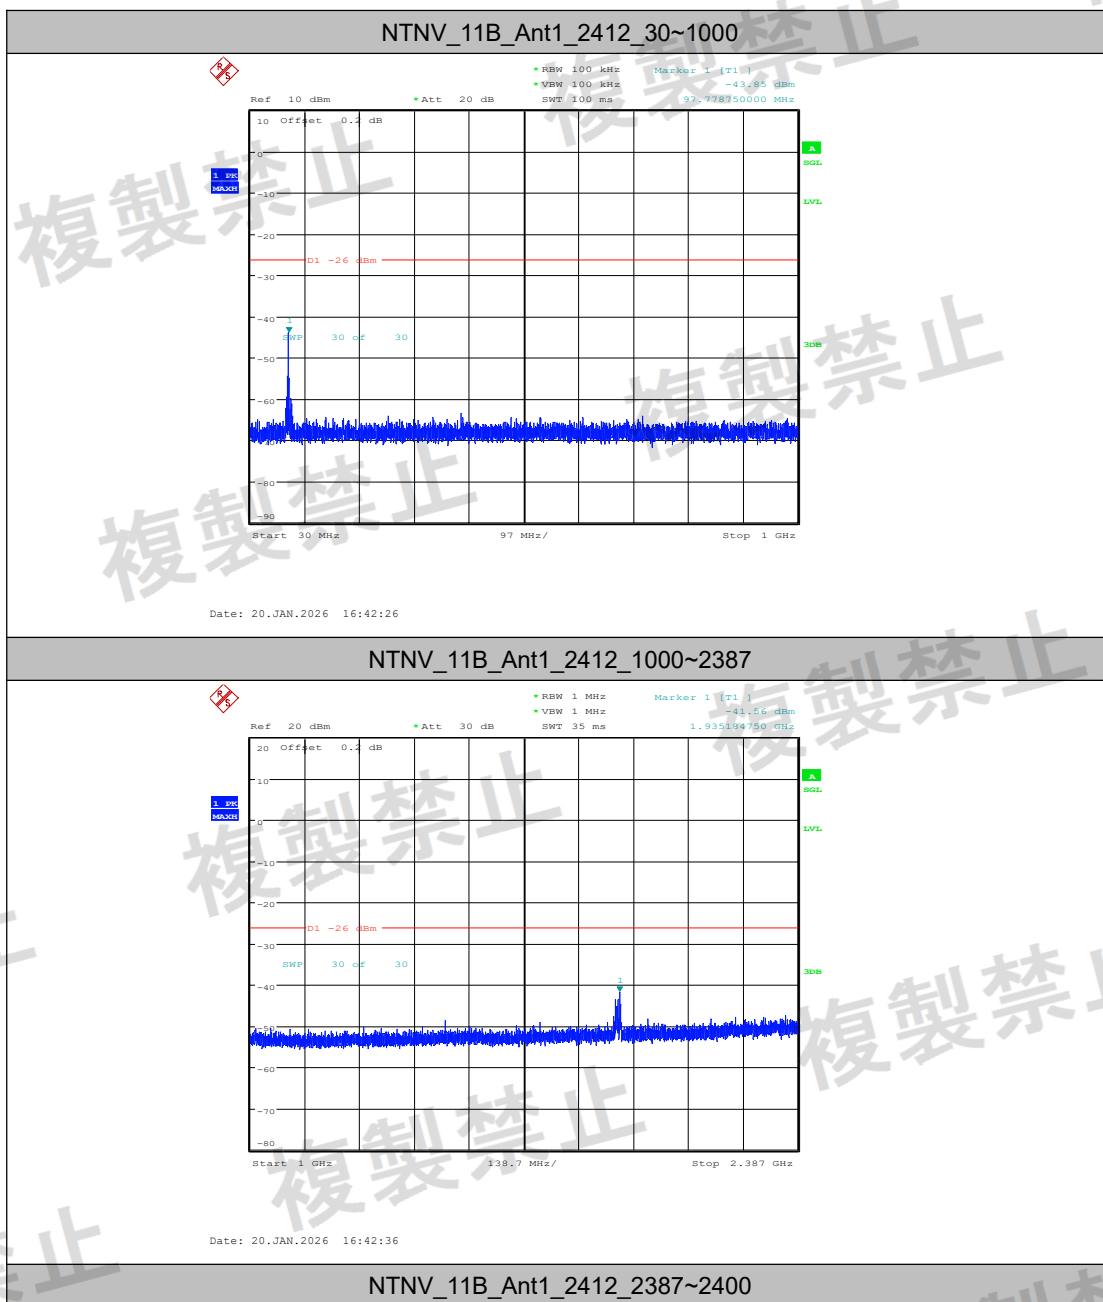

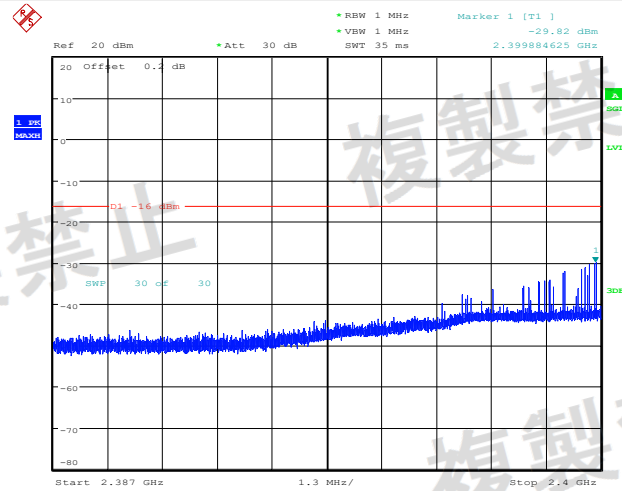


Date: 20.JAN.2026 16:42:45

NTNV\_11B\_Ant1\_2412\_2483.5~2496.5

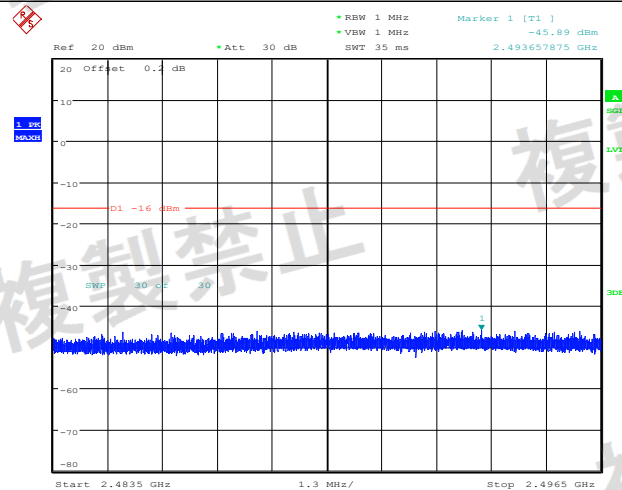


Date: 20.JAN.2026 16:42:53

NTNV\_11B\_Ant1\_2412\_2496.5~13000

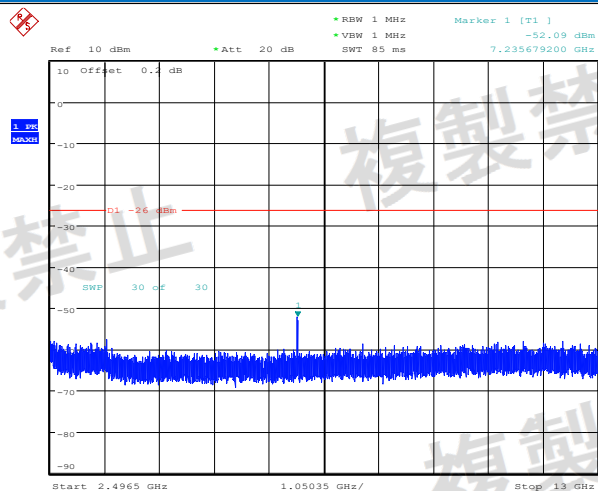


Date: 20.JAN.2026 16:43:08

NTNV\_11B\_Ant1\_2442\_30~1000

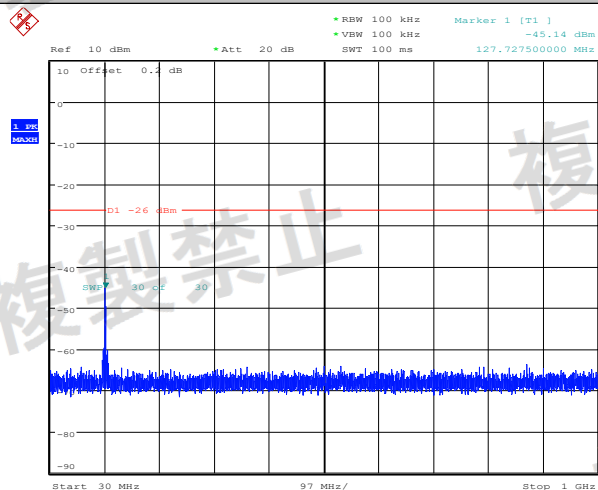


Date: 20.JAN.2026 16:44:36

NTNV\_11B\_Ant1\_2442\_1000~2387

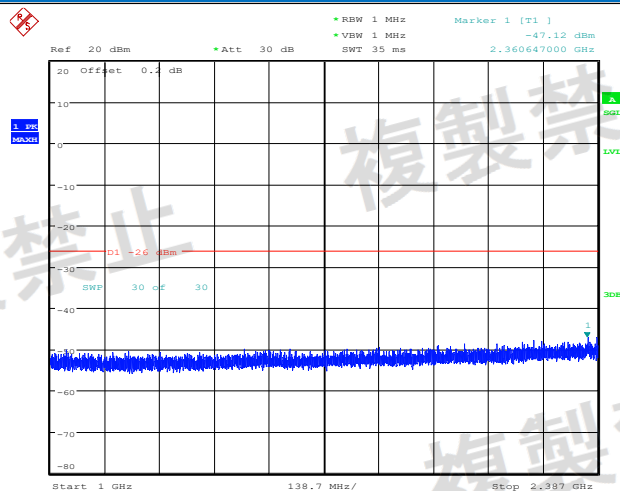


Date: 20.JAN.2026 16:44:45

NTNV\_11B\_Ant1\_2442\_2387~2400

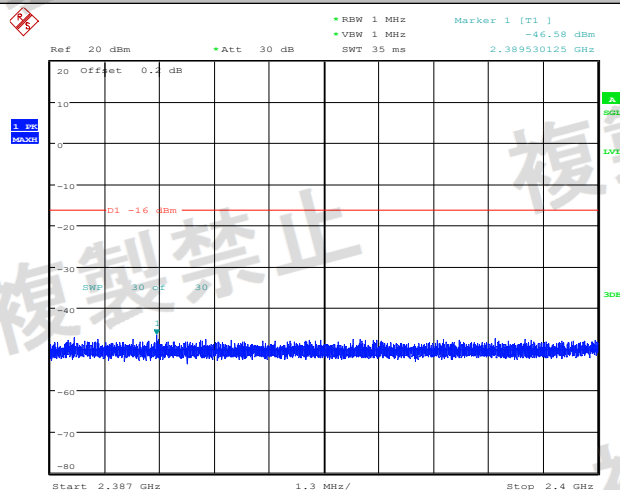


Date: 20.JAN.2026 16:44:54

NTNV\_11B\_Ant1\_2442\_2483.5~2496.5

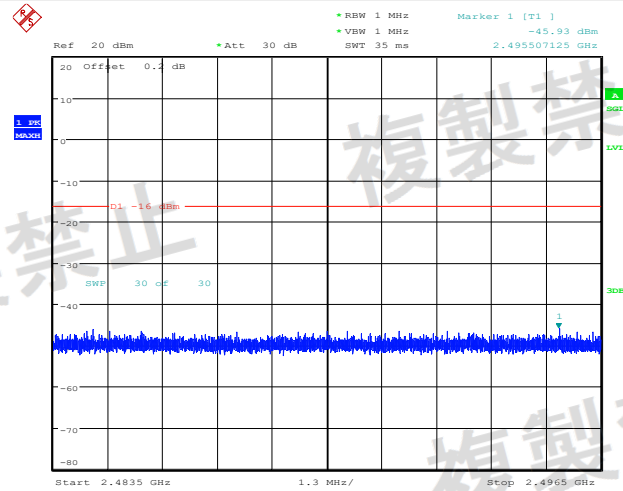


Date: 20.JAN.2026 16:45:02

NTNV\_11B\_Ant1\_2442\_2496.5~13000

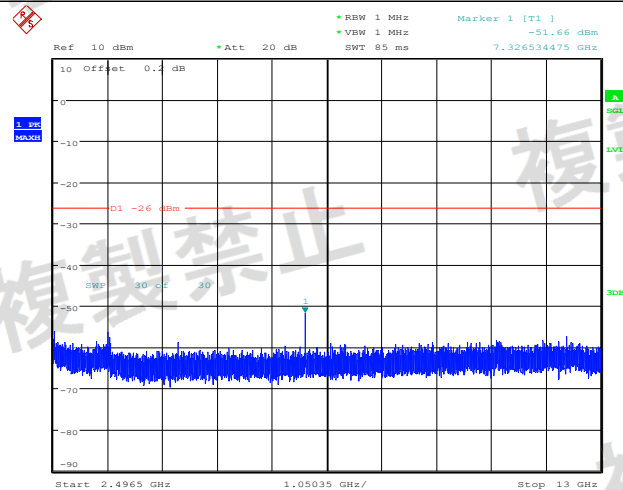


Date: 20.JAN.2026 16:45:17

NTNV\_11B\_Ant1\_2472\_30~1000

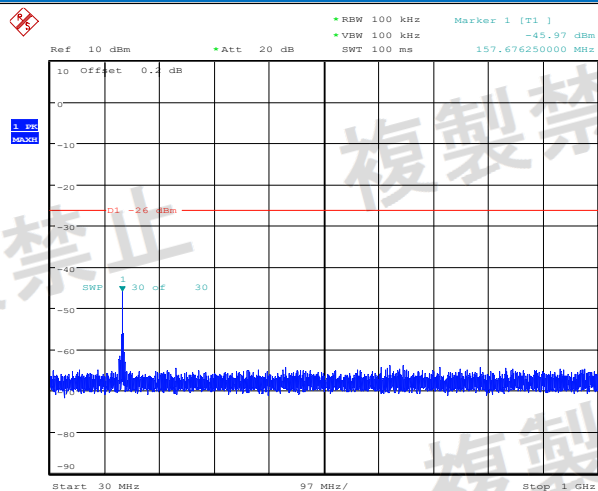


Date: 20.JAN.2026 16:47:36

NTNV\_11B\_Ant1\_2472\_1000~2387

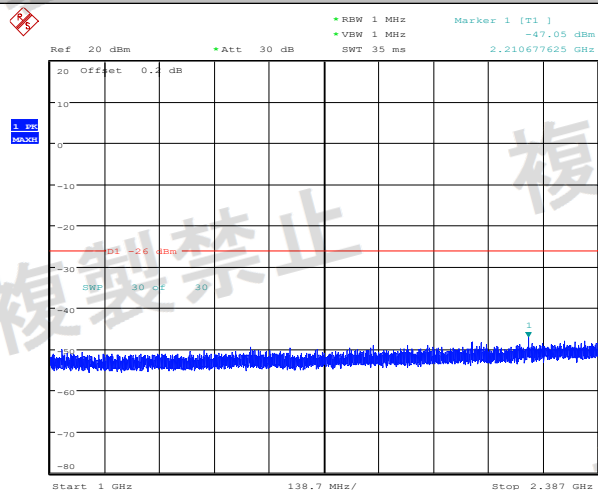


Date: 20.JAN.2026 16:47:46

NTNV\_11B\_Ant1\_2472\_2387~2400

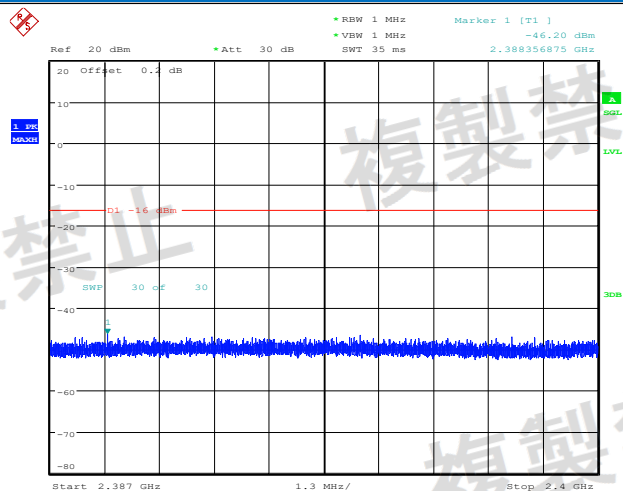


Date: 20.JAN.2026 16:47:57


NTNV\_11B\_Ant1\_2472\_2483.5~2496.5

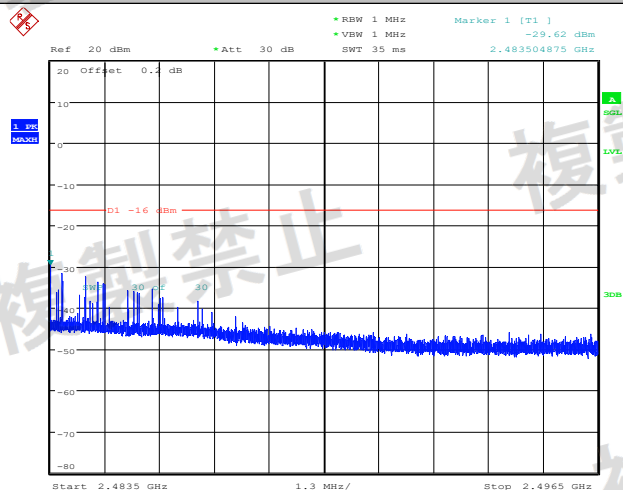

Date: 20.JAN.2026 16:48:05


NTNV\_11B\_Ant1\_2472\_2496.5~13000

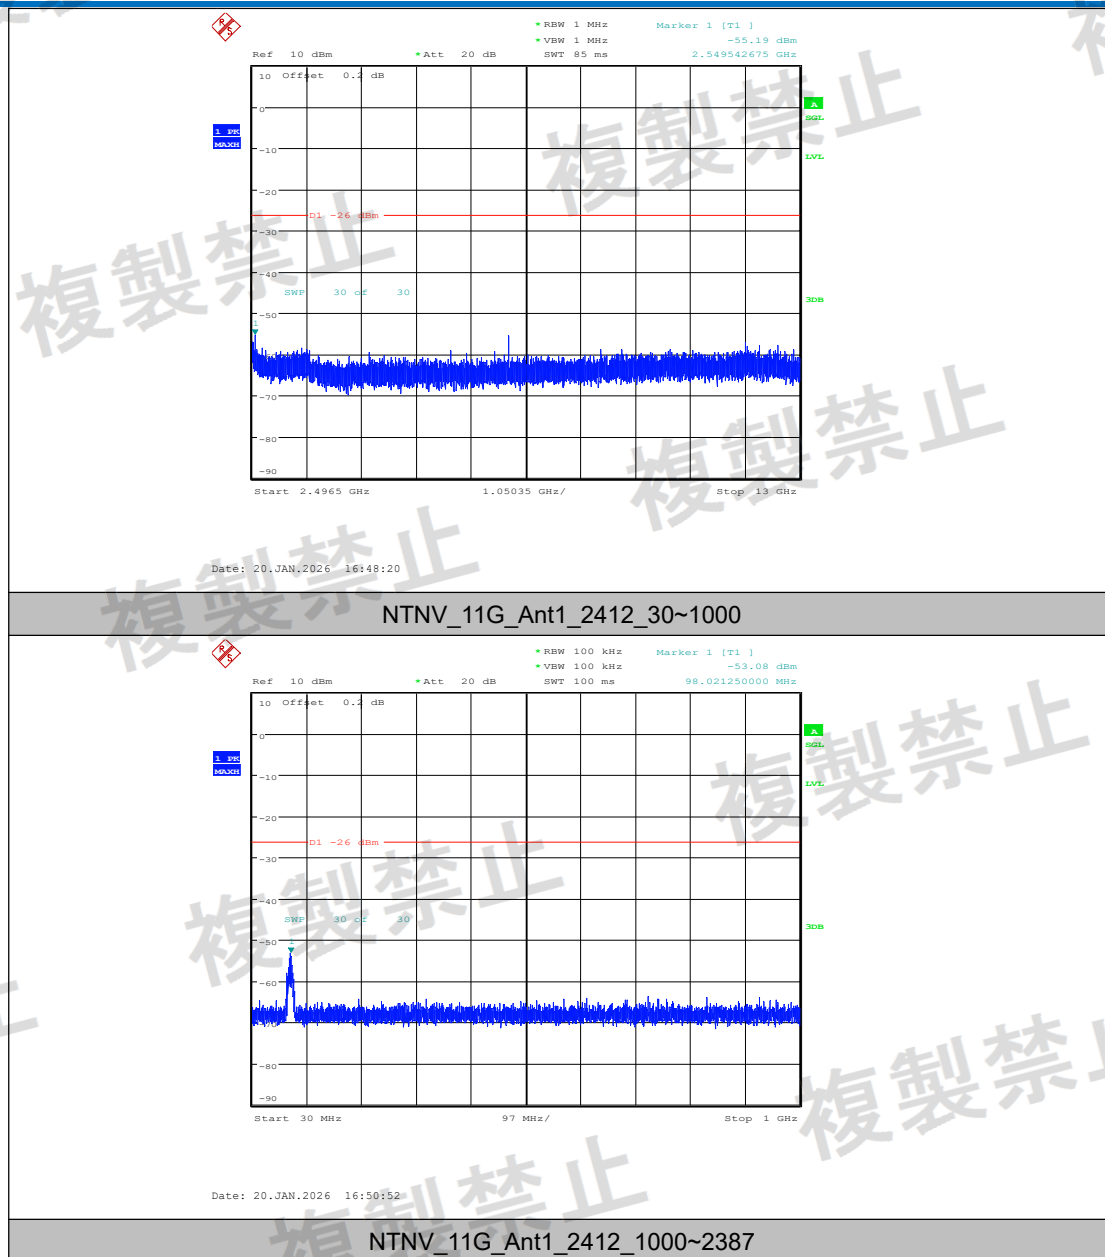

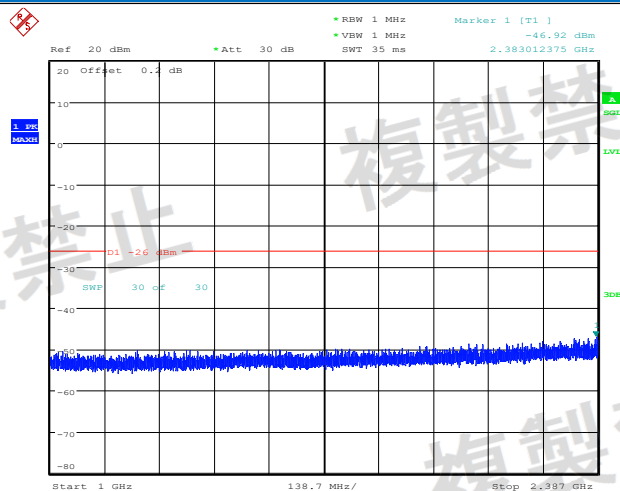


Date: 20.JAN.2026 16:51:02

NTNV 11G Ant1 2412 2387~2400

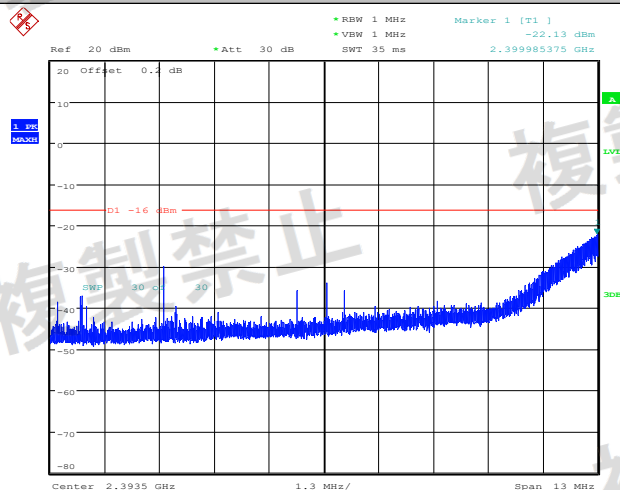


Date: 20.JAN.2026 16:52:06

NTNV\_11G\_Ant1\_2412\_2483.5~2496.5

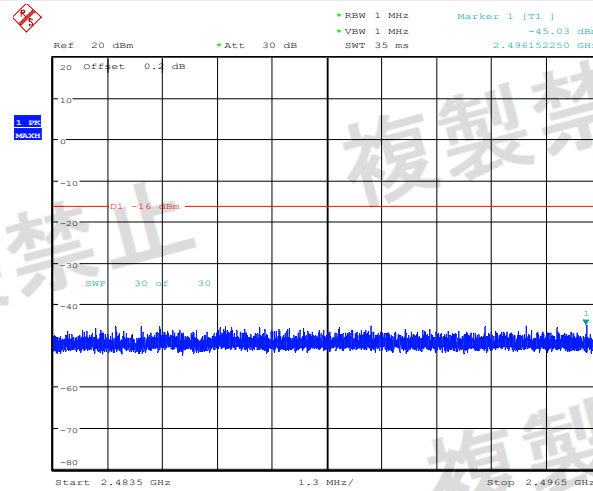


Date: 20.JAN.2026 16:52:14

NTNV\_11G\_Ant1\_2412\_2496.5~13000

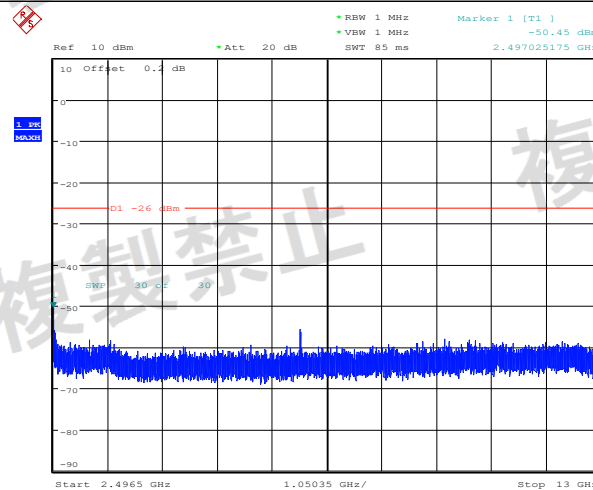


Date: 20.JAN.2026 16:52:30

NTNV\_11G\_Ant1\_2442\_30~1000

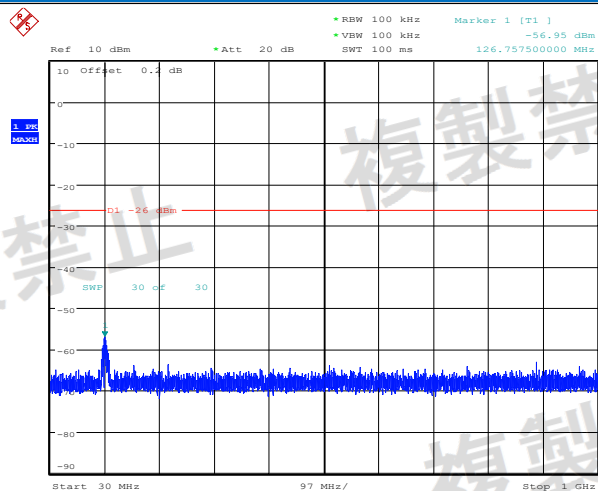


Date: 20.JAN.2026 16:54:25

### NTNV\_11G\_Ant1\_2442\_1000~2387

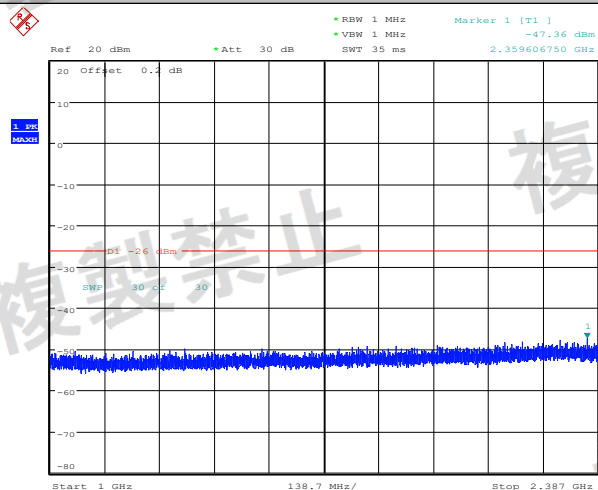


Date: 20.JAN.2026 16:54:34

### NTNV\_11G\_Ant1\_2442\_2387~2400

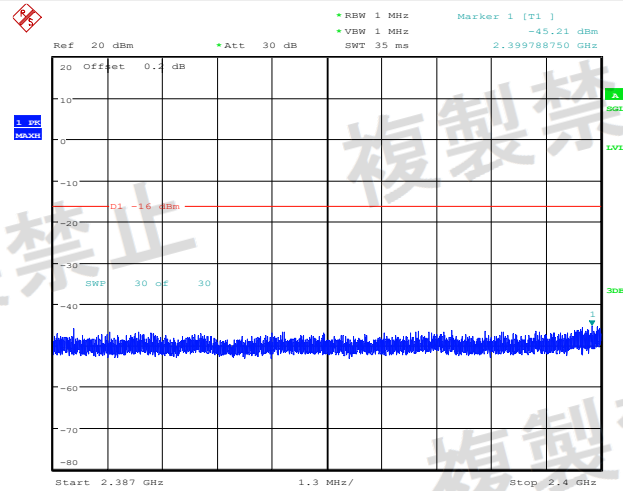


Date: 20.JAN.2026 16:54:44

NTNV\_11G\_Ant1\_2442\_2483.5~2496.5

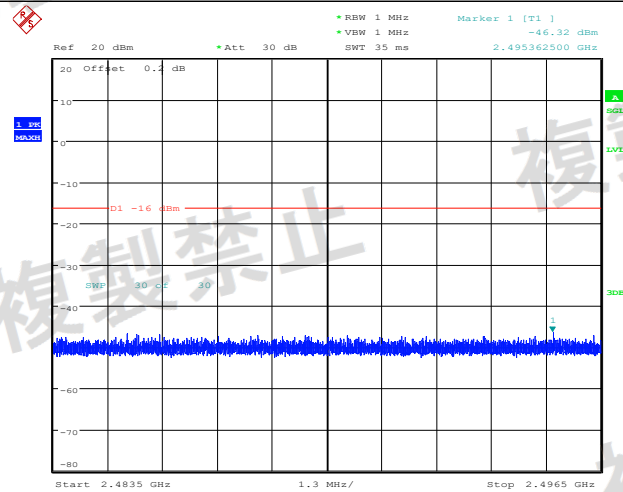


Date: 20.JAN.2026 16:54:52


NTNV\_11G\_Ant1\_2442\_2496.5~13000

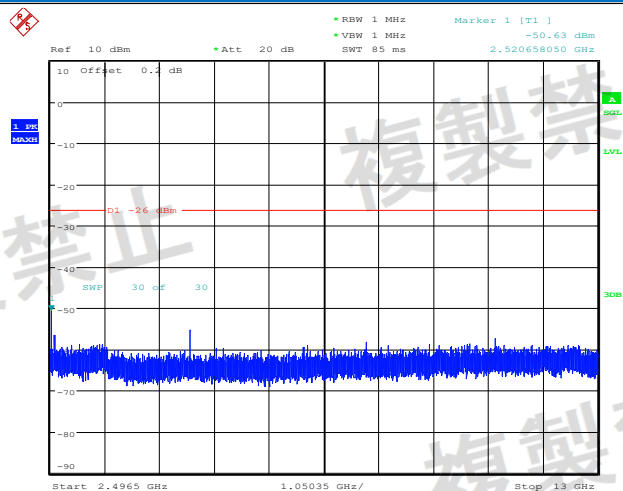

NTNV\_11G\_Ant1\_2472\_30~1000

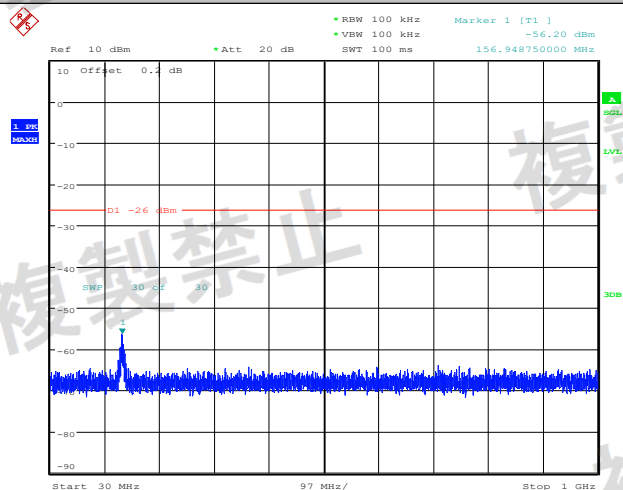


NTNV\_11G\_Ant1\_2472\_1000~2387

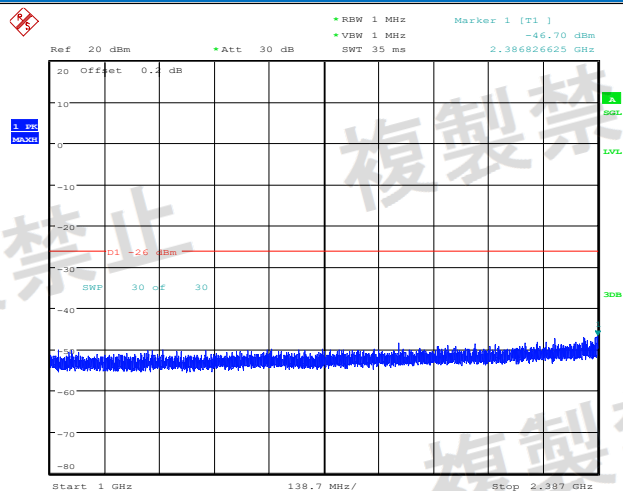


Date: 20.JAN.2026 16:58:23

NTNV\_11G\_Ant1\_2472\_2387~2400

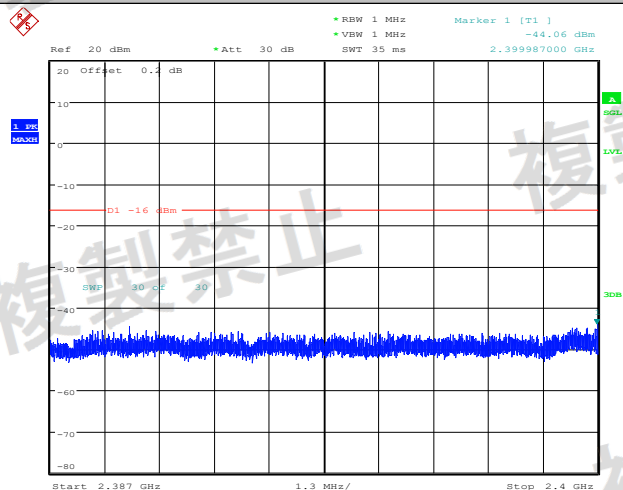


Date: 20.JAN.2026 16:58:32

NTNV\_11G\_Ant1\_2472\_2483.5~2496.5

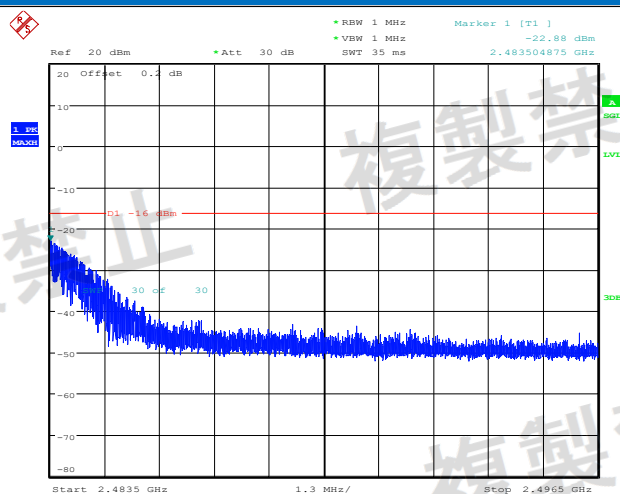


Date: 20.JAN.2026 16:58:41

NTNV 11G Ant1 2472 2496.5~13000

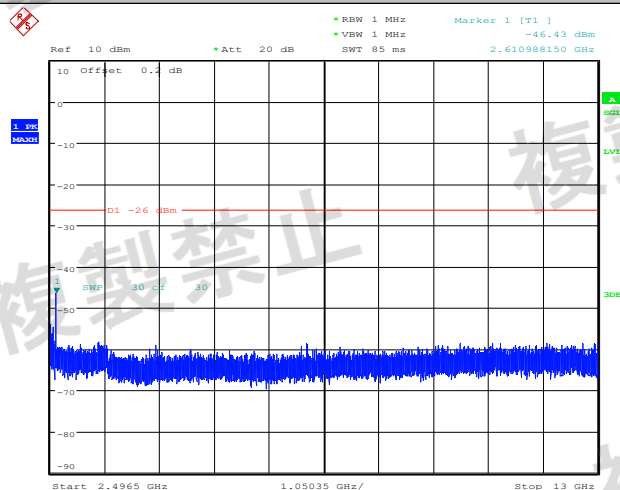


Date: 20.JAN.2026 16:58:56

NTNV 11N20SISO Ant1 2412 30~1000

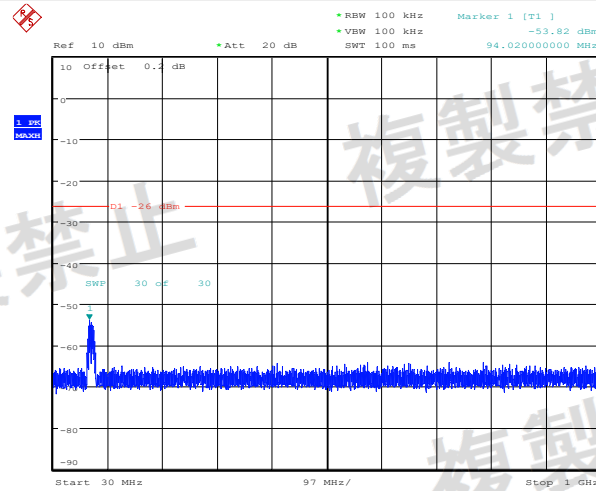


Date: 20.JAN.2026 18:06:27

NTNV\_11N20SISO\_Ant1\_2412\_1000~2387

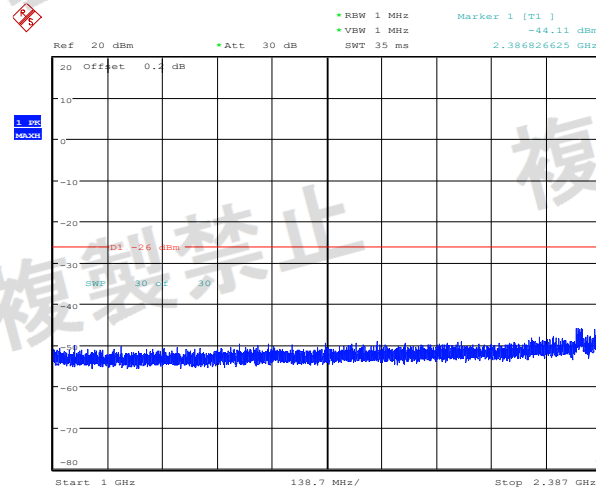


Date: 20.JAN.2026 18:06:37


NTNV\_11N20SISO\_Ant1\_2412\_2387~2400

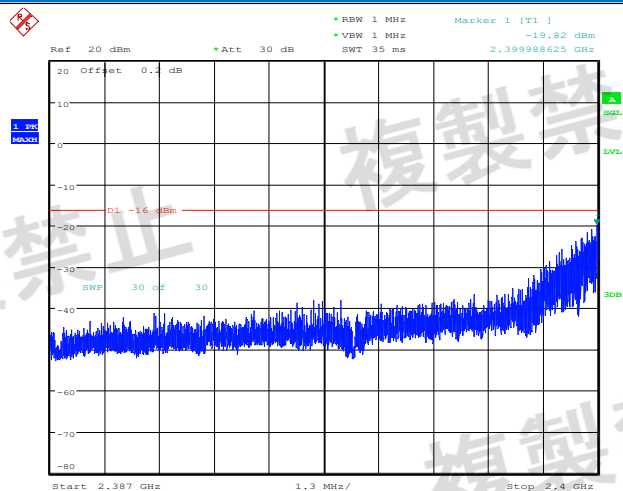

NTNV\_11N20SISO\_Ant1\_2412\_2483.5~2496.5

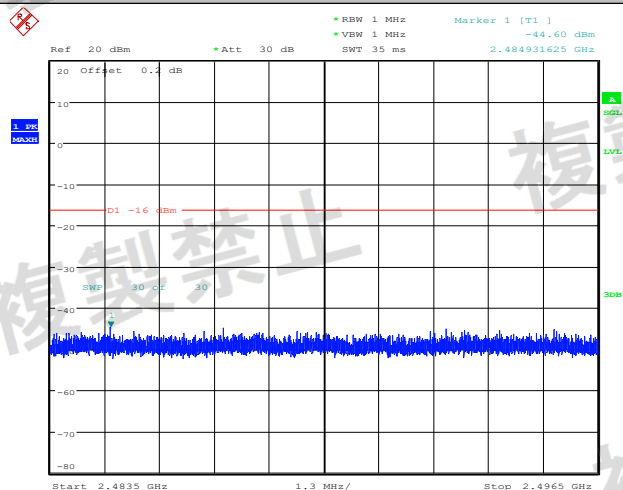


NTNV\_11N20SISO\_Ant1\_2412\_2496.5~13000

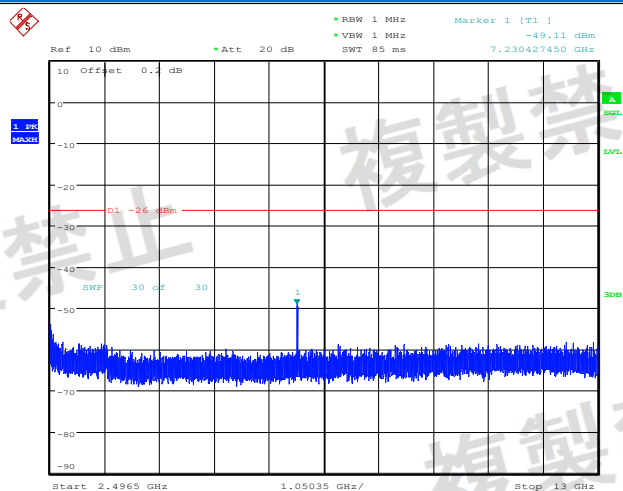


Date: 20.JAN.2026 18:07:09

NTNV\_11N20SISO\_Ant1\_2442\_30~1000

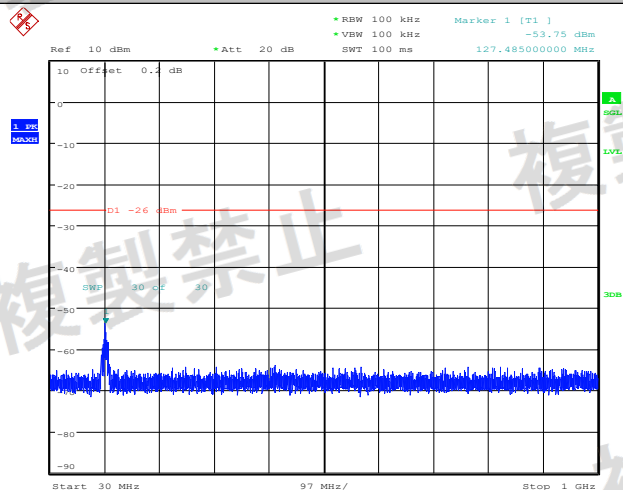


Date: 20.JAN.2026 18:08:59

NTNV\_11N20SISO\_Ant1\_2442\_1000~2387

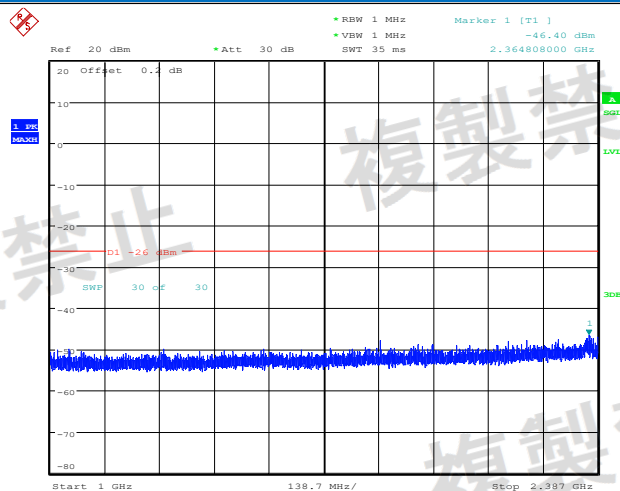


Date: 20.JAN.2026 18:09:08

NTNV 11N20SISO Ant1 2442 2387~2400

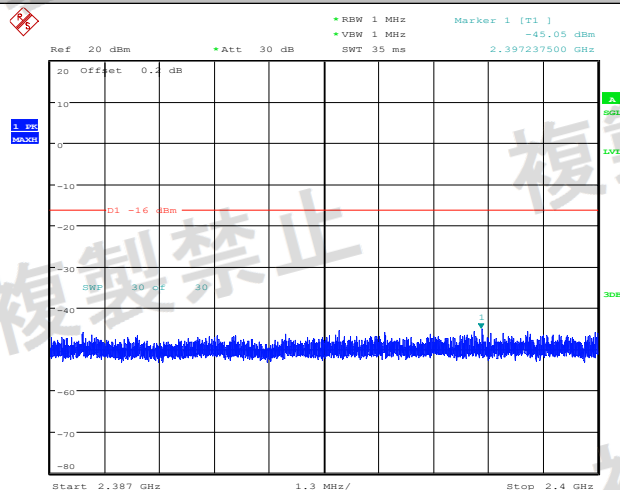


Date: 20.JAN.2026 18:09:17

NTNV\_11N20SISO\_Ant1\_2442\_2483.5~2496.5

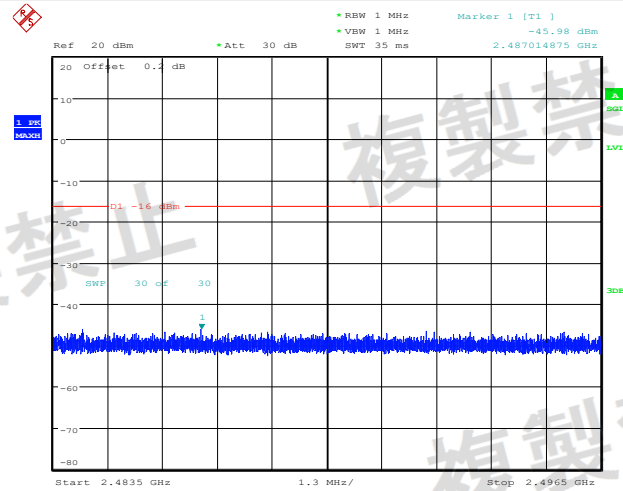


Date: 20.JAN.2026 18:09:26

NTNV\_11N20SISO\_Ant1\_2442\_2496.5~13000

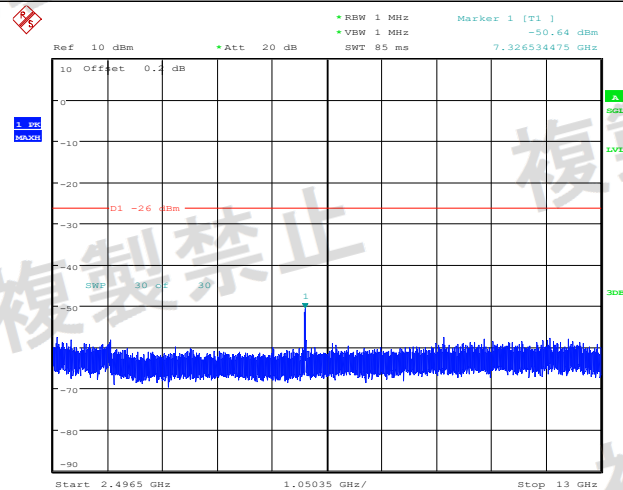


Date: 20.JAN.2026 18:09:41

NTNV\_11N20SISO\_Ant1\_2472\_30~1000

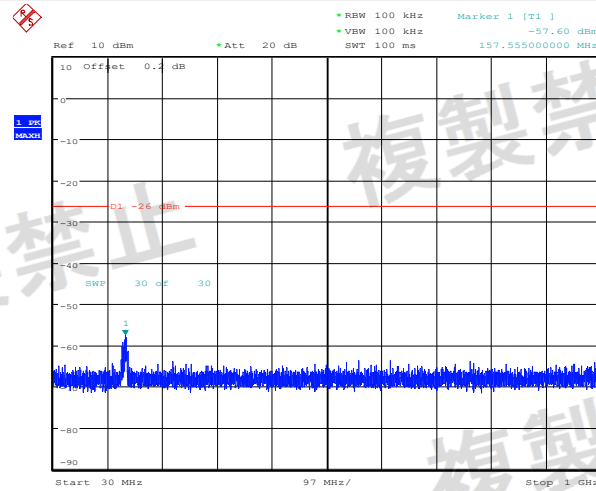


Date: 20.JAN.2026 18:11:08

NTNV\_11N20SISO\_Ant1\_2472\_1000~2387

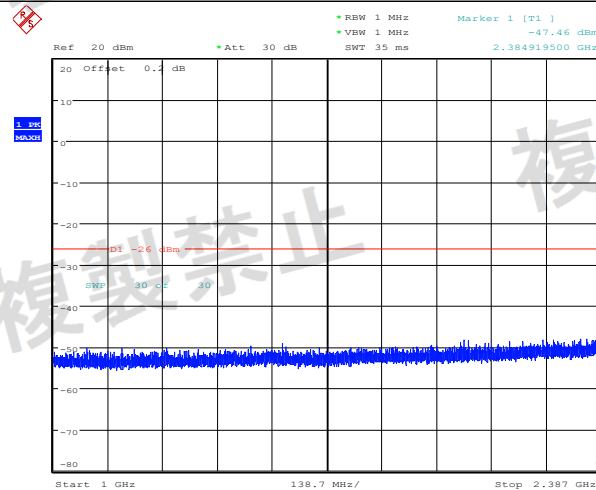


Date: 20.JAN.2026 18:11:17

NTNV\_11N20SISO\_Ant1\_2472\_2387~2400

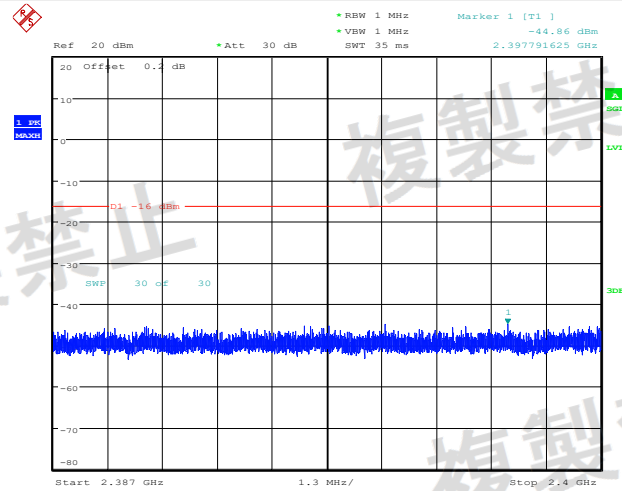


Date: 20.JAN.2026 18:11:26

NTNV\_11N20SISO\_Ant1\_2472\_2483.5~2496.5

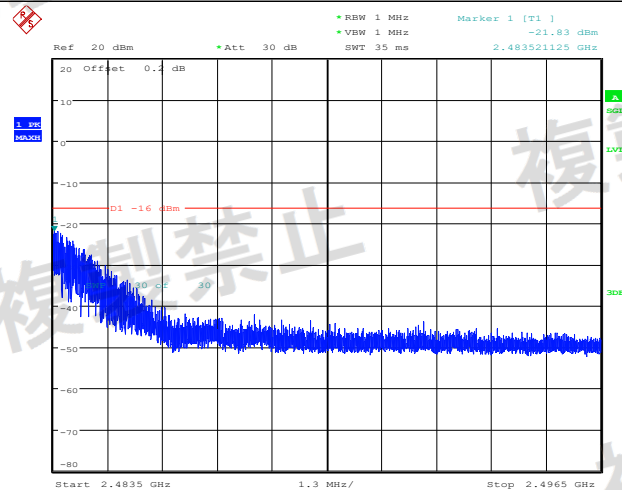

Date: 20.JAN.2026 18:11:35

NTNV\_11N20SISO\_Ant1\_2472\_2496.5~13000

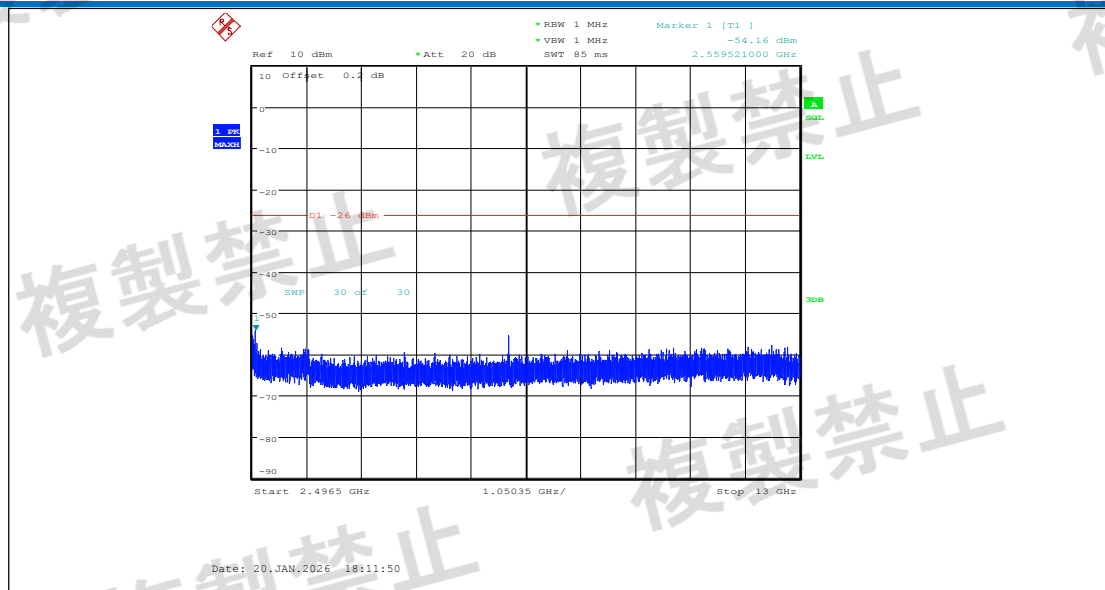

Test Result: The unit does meet the requirements.

## 6.12 RF accessibility

### Standard requirement

Article 49-20, paragraph 1 (a)

The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.

### Tamper proof Declaration:

- ☐ 1. Sealed with special screws.
- ☐ 2. Plastic chassis is being welded using ultrasonic waves.
- ☐ 3. Chassis is glued using a special adhesive.
- ☐ 4. Metal covers are spot-fused.
- ☐ 5. Cover is specially interlocked.
- ☐ 6. RF and Modulation components are covered with shielding case and this shielding case is soldered.
- ☐ 7. Shield case is welded at RF and modulation parts, and ID-ROM is welded using the BGA Method.
- ☐ 8. Shield case is welded at RF and modulation parts, and ID-ROM is glued at its lead with a special adhesive.
- ☐ 9. Shield case is welded at RF and modulation parts, and ID-ROM is glued with a non-transparent laminating agent.
- ☒ 10. RF and Modulation parts are mounted on PCB with surface mount technology, and there is no any adjustable parts on PCB or adjustable parts are not exposed.



Result: Method used to meet "can not open easily requirement" is shielding cover, Any attempt to modify the RF chip will void the normal operation of this device.

### 6.13 Spurious Emissions of Rx

Test Requirement: Item 19 of Article 2-1

- (1) Below 1 GHz : 4 nW
- (2) 1 GHz and over : 20 nW

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:





Test Procedure:

1. Test Conditions:  
Spectrum Analyzer is used for measurement.
2. EUT conditions:  
Modulation/Spread/Hopping ON  
For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.
3. Spectrum Analyzer conditions:
  - Step 1  
All spurious are measured from 30 MHz to 13 GHz by peak mode.
  - Step 2  
IF the value measured by Step1 is 2 dB or less, measure in average mode.
  - Test setup for Step 1:  
Frequency: 30 MHz – 1GHz , 1GHz – 13 GHz (for 2412MHz-2472MHz)  
RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz)  
VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz)  
Sweep Time Auto  
detector mode Positive peak  
Indication mode Max hold
  - Test setup for Step 2:  
Frequency: Spurious Frequency  
Span 0 Hz  
RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz)  
VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz)  
Sweep Time Auto  
detector mode Sample  
Indication mode Max hold

| TestCondition | TestMode      | Channel<br>(MHz) | Freq.Range<br>[MHz] | Freq.<br>[MHz] | Result<br>[dBm/MH<br>z] | Limit<br>[dBm/<br>MHz] | Result<br>[μW/MH<br>z] | Limit<br>μW/MH<br>z] | Verdict |
|---------------|---------------|------------------|---------------------|----------------|-------------------------|------------------------|------------------------|----------------------|---------|
| NTNV          | 11B           | 2412             | 30~1000             | 800.06         | -72.84                  | ≤-54                   | 0.05200                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 2583.40        | -65.93                  | ≤-47                   | 0.25527                | ≤20                  | PASS    |
|               |               | 2442             | 30~1000             | 159.98         | -72.56                  | ≤-54                   | 0.05546                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 9326.80        | -78.97                  | ≤-47                   | 0.01268                | ≤20                  | PASS    |
|               |               | 2472             | 30~1000             | 851.11         | -73.90                  | ≤-54                   | 0.04074                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 2404.60        | -71.41                  | ≤-47                   | 0.07228                | ≤20                  | PASS    |
|               | 11G           | 2412             | 30~1000             | 360.65         | -73.47                  | ≤-54                   | 0.04498                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 11074.60       | -77.47                  | ≤-47                   | 0.01791                | ≤20                  | PASS    |
|               |               | 2442             | 30~1000             | 532.70         | -73.77                  | ≤-54                   | 0.04198                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 2476.00        | -73.77                  | ≤-47                   | 0.04198                | ≤20                  | PASS    |
|               |               | 2472             | 30~1000             | 494.39         | -73.54                  | ≤-54                   | 0.04426                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 12465.40       | -76.48                  | ≤-47                   | 0.02249                | ≤20                  | PASS    |
|               | 11N20SI<br>SO | 2412             | 30~1000             | 179.14         | -72.97                  | ≤-54                   | 0.05047                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 2440.60        | -58.26                  | ≤-47                   | 1.49279                | ≤20                  | PASS    |
|               |               | 2442             | 30~1000             | 413.64         | -73.78                  | ≤-54                   | 0.04188                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 3568.60        | -77.33                  | ≤-47                   | 0.01849                | ≤20                  | PASS    |
|               |               | 2472             | 30~1000             | 706.70         | -73.87                  | ≤-54                   | 0.04102                | ≤4                   | PASS    |
|               |               |                  | 1000~13000          | 2459.80        | -72.66                  | ≤-47                   | 0.05420                | ≤20                  | PASS    |


Result plot as follows:

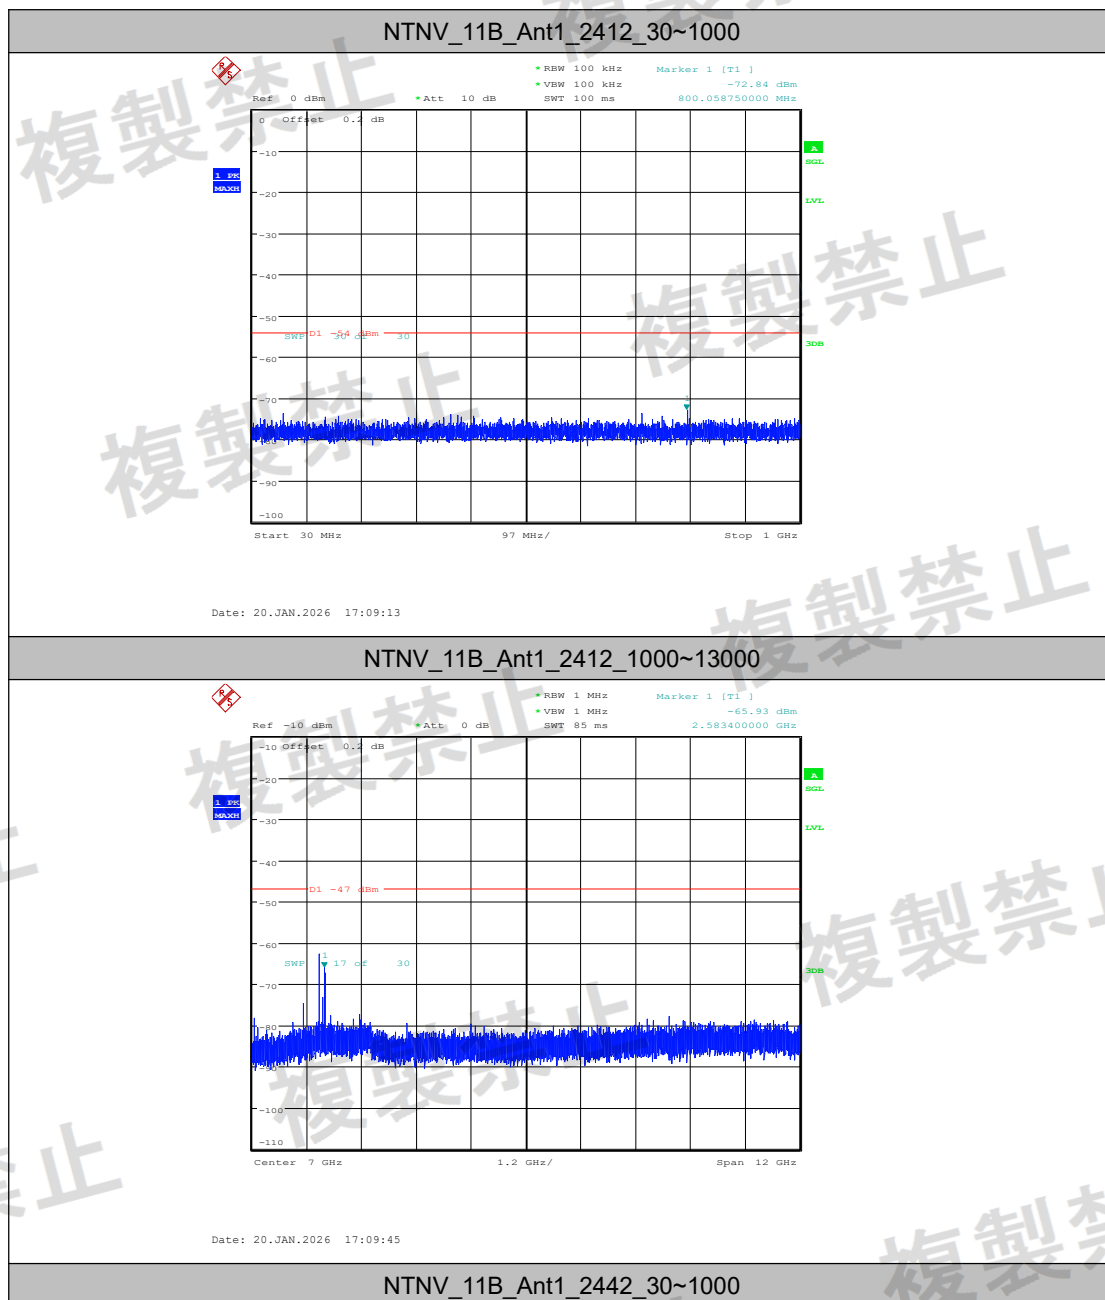

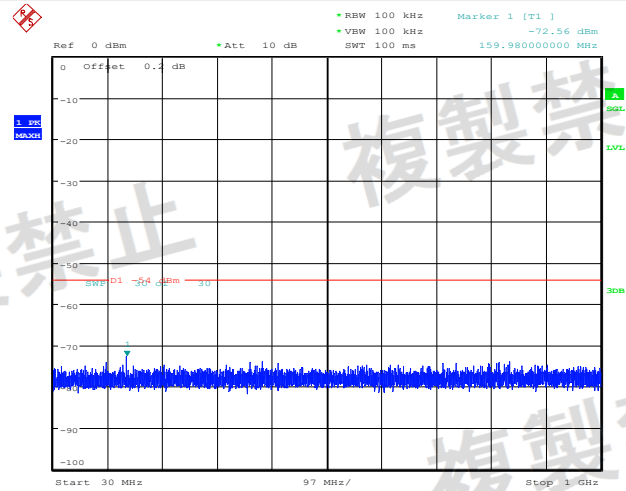


Date: 20.JAN.2026 17:09:59

NTNV\_11B\_Ant1\_2442\_1000~13000

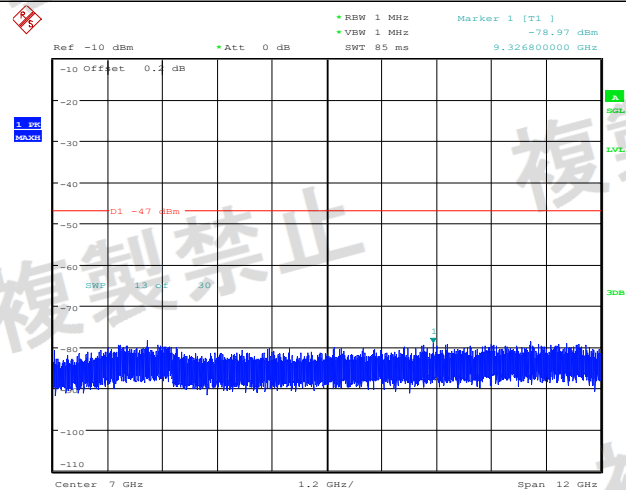


Date: 20.JAN.2026 17:10:48

NTNV\_11B\_Ant1\_2472\_30~1000

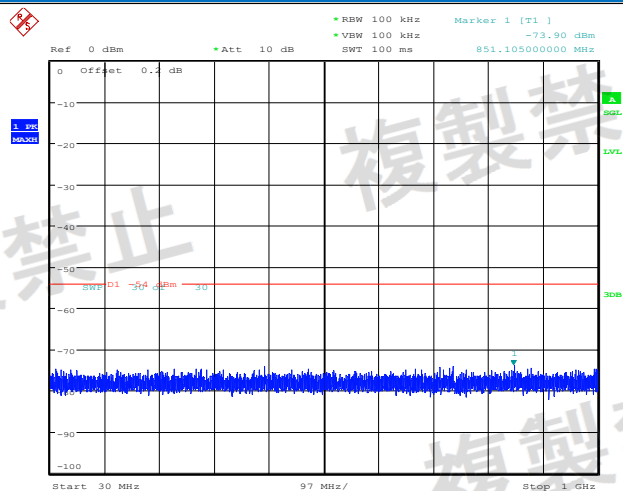


Date: 20.JAN.2026 17:11:03

NTNV\_11B\_Ant1\_2472\_1000~13000

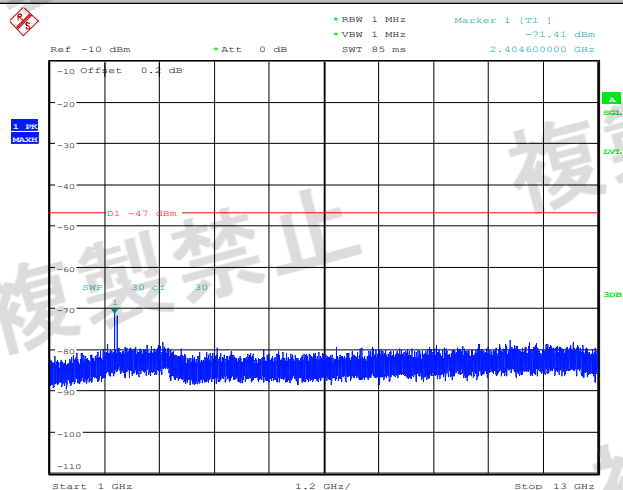


Date: 20.JAN.2026 17:11:18

NTNV\_11G\_Ant1\_2412\_30~1000

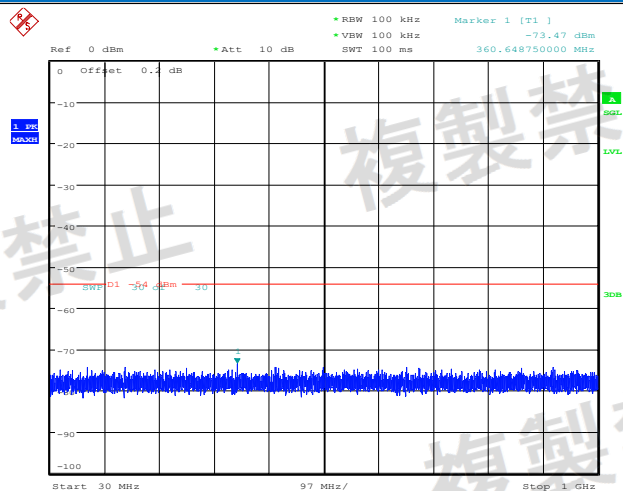


Date: 20.JAN.2026 17:12:15

NTNV\_11G\_Ant1\_2412\_1000~13000

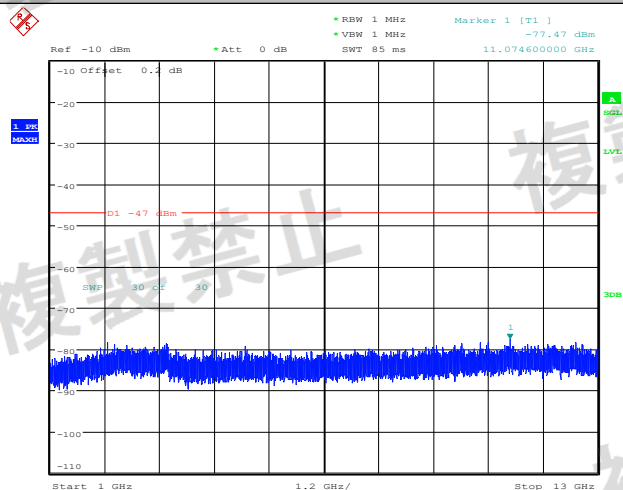


Date: 20.JAN.2026 17:12:31

NTNV\_11G\_Ant1\_2442\_30~1000

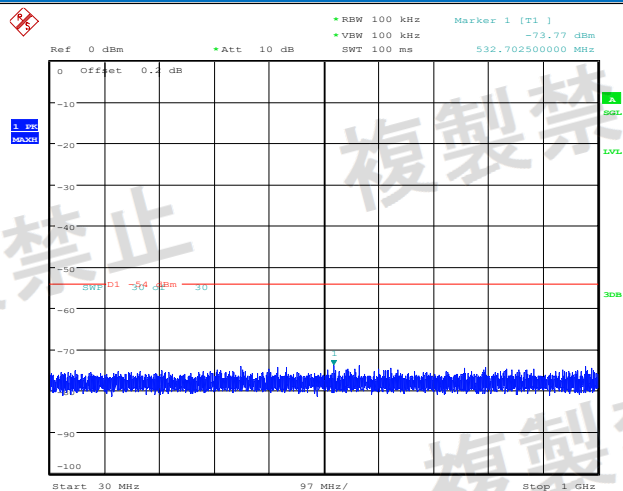


Date: 20.JAN.2026 17:12:44

### NTNV\_11G\_Ant1\_2442\_1000~13000

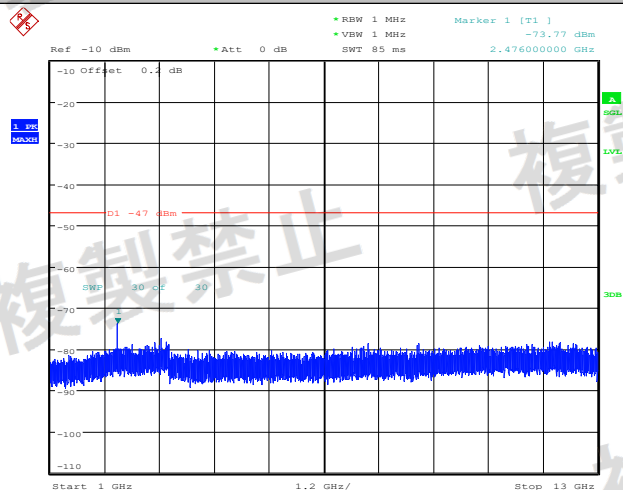


Date: 20.JAN.2026 17:13:00

### NTNV\_11G\_Ant1\_2472\_30~1000

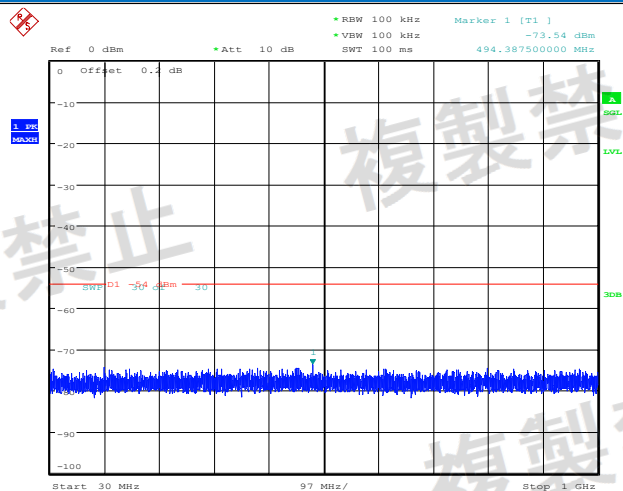


Date: 20.JAN.2026 17:13:13

### NTNV\_11G\_Ant1\_2472\_1000~13000

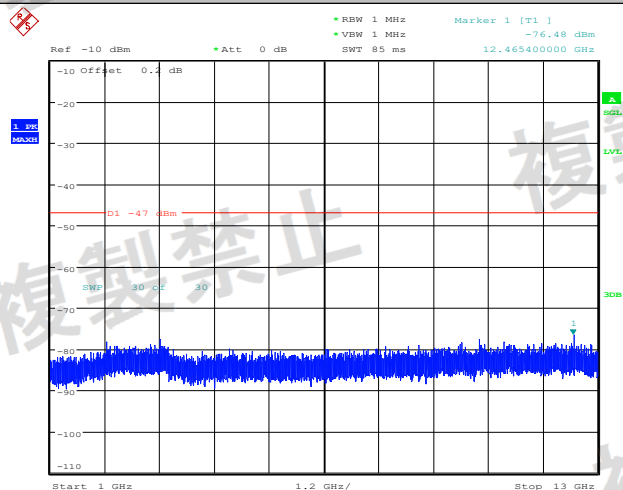


Date: 20.JAN.2026 17:13:29

### NTNV\_11N20SISO\_Ant1\_2412\_30~1000

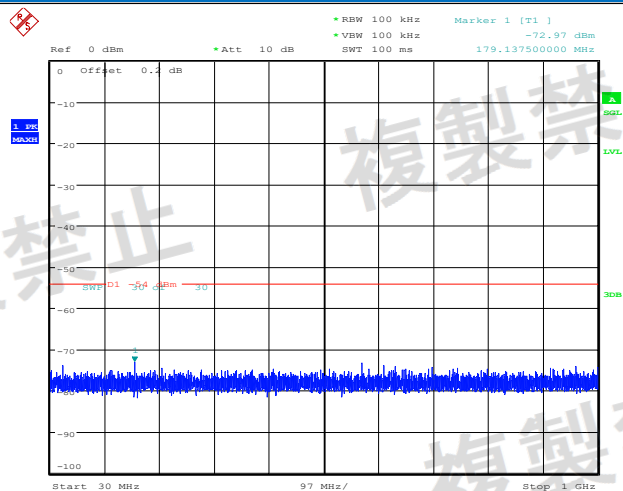


Date: 20.JAN.2026 17:13:42

NTNV\_11N20SISO\_Ant1\_2412\_1000~13000

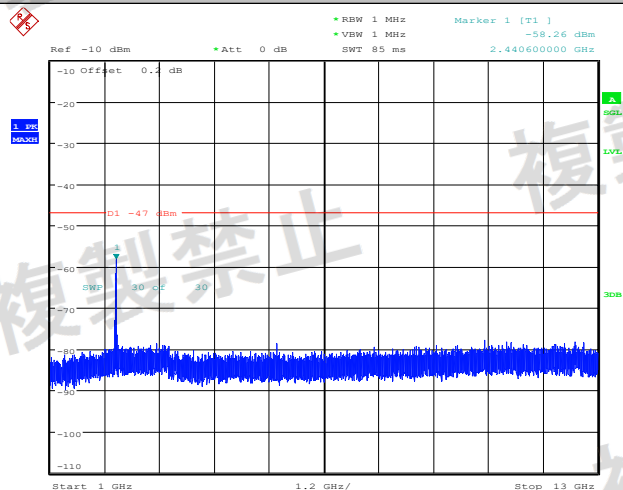


Date: 20.JAN.2026 17:13:58

NTNV\_11N20SISO\_Ant1\_2442\_30~1000

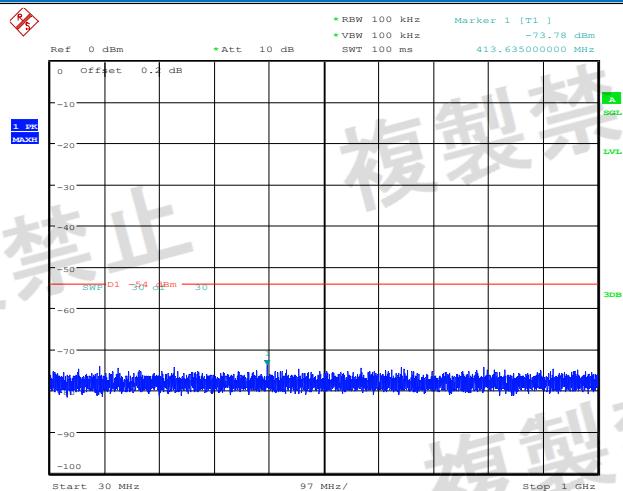


Date: 20.JAN.2026 17:14:12

NTNV\_11N20SISO\_Ant1\_2442\_1000~13000

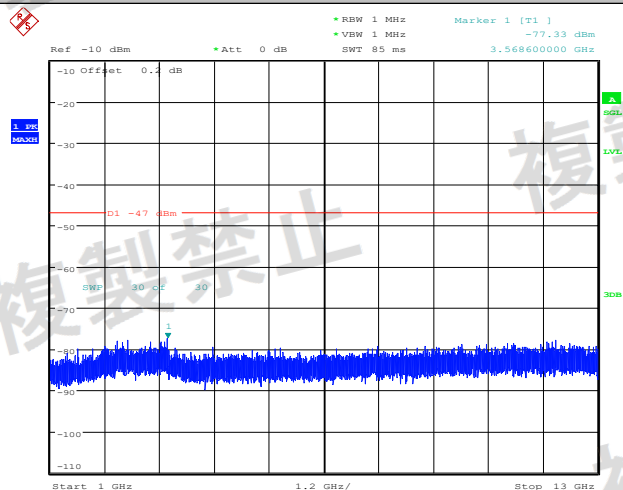


Date: 20.JAN.2026 17:14:27

NTNV\_11N20SISO\_Ant1\_2472\_30~1000

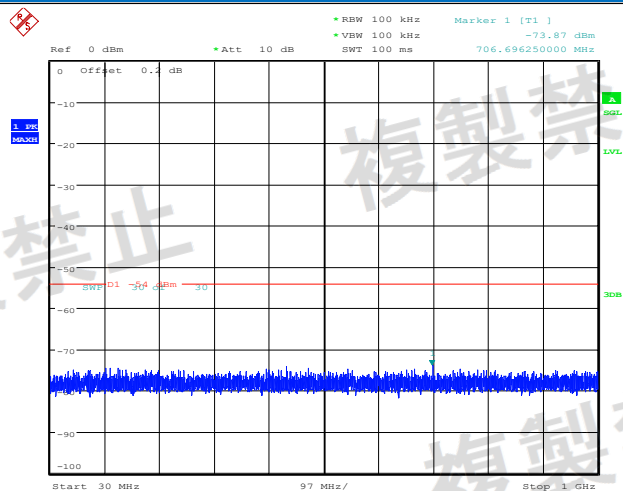

Date: 20.JAN.2026 17:14:43



NTNV\_11N20SISO\_Ant1\_2472\_1000~13000

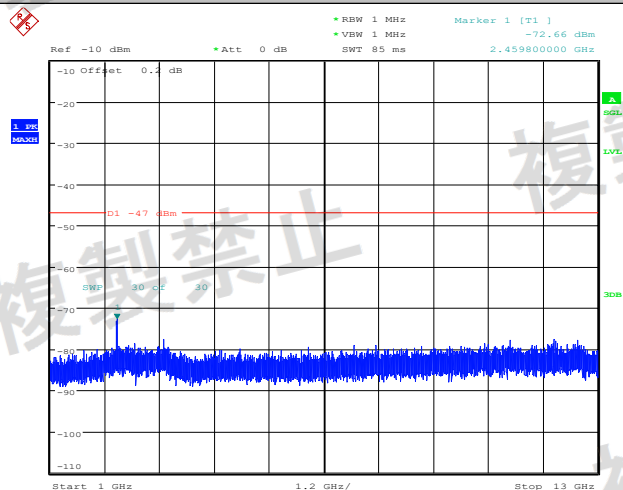



Date: 20.JAN.2026 17:14:58


## 7 Photographs


### 7.1 EUT Test Setup

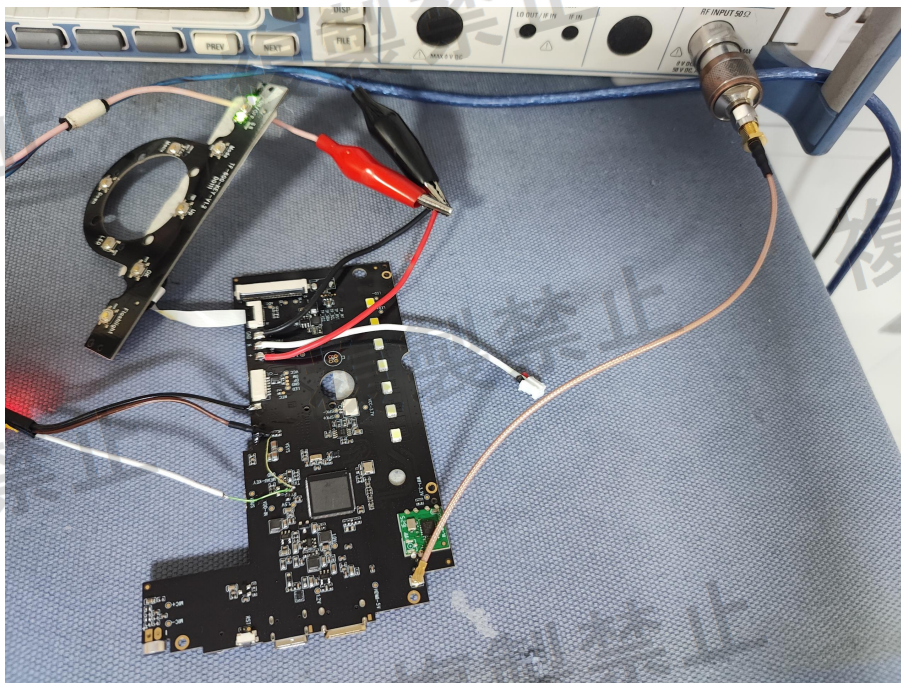
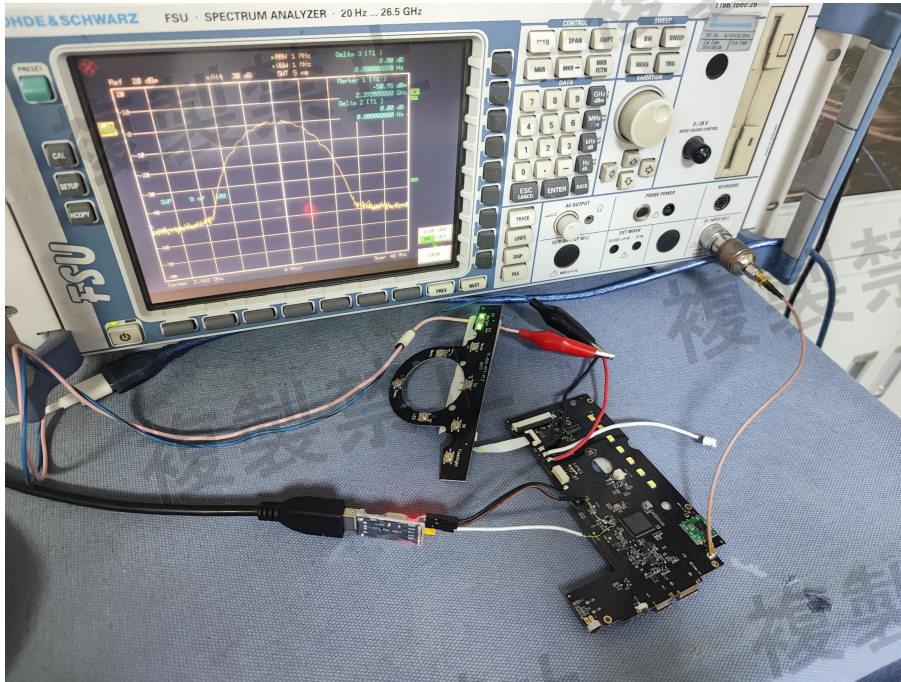



## 8 Photographs - EUT Constructional Details

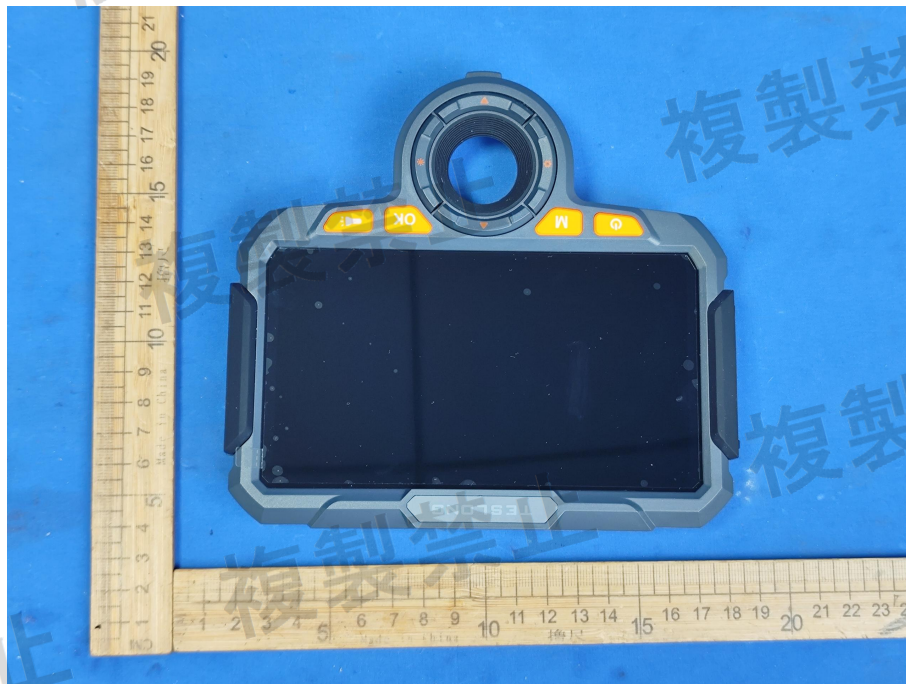
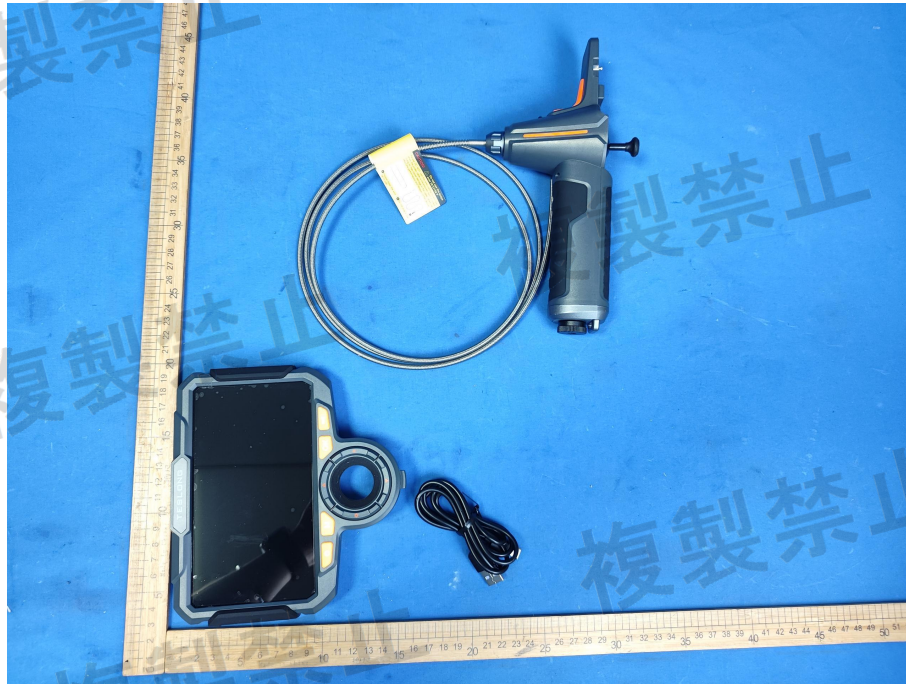



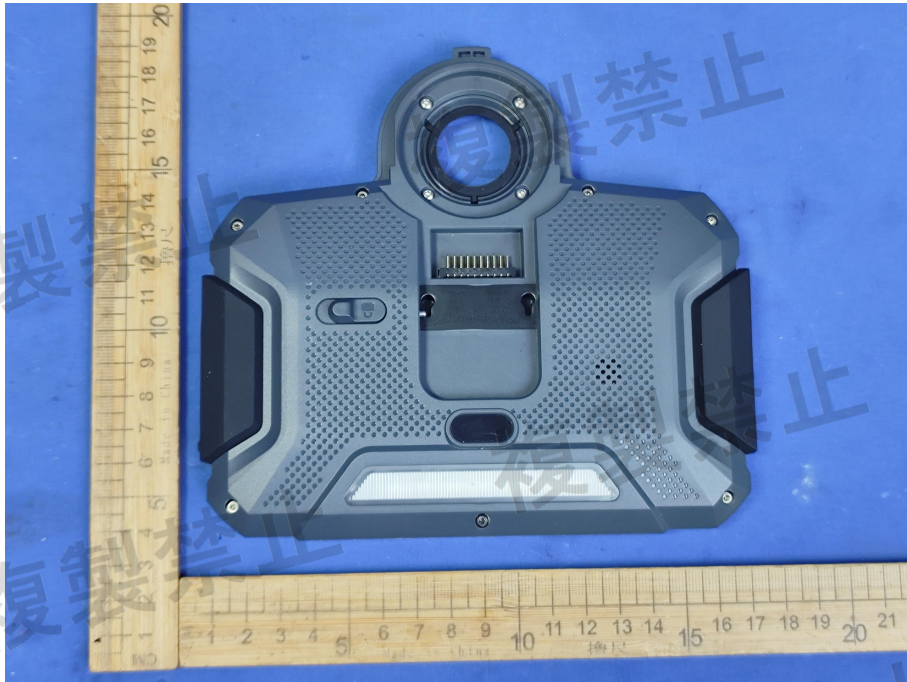


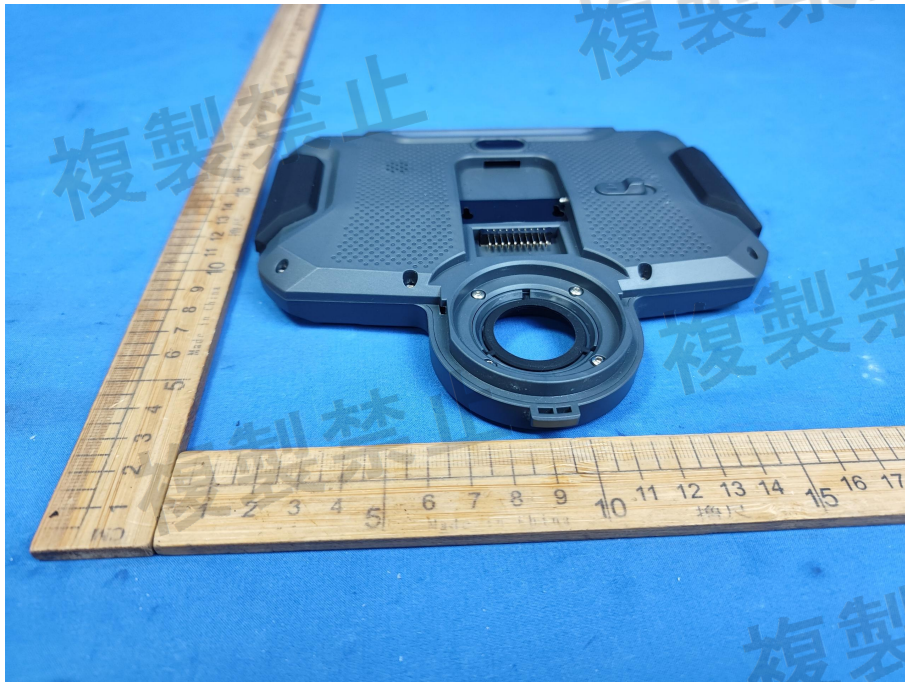


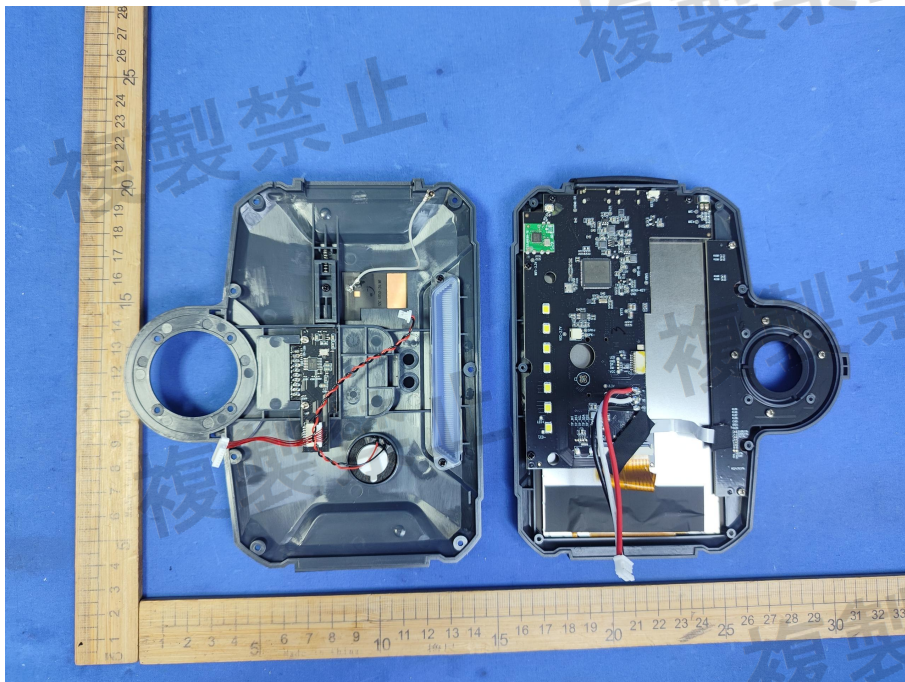
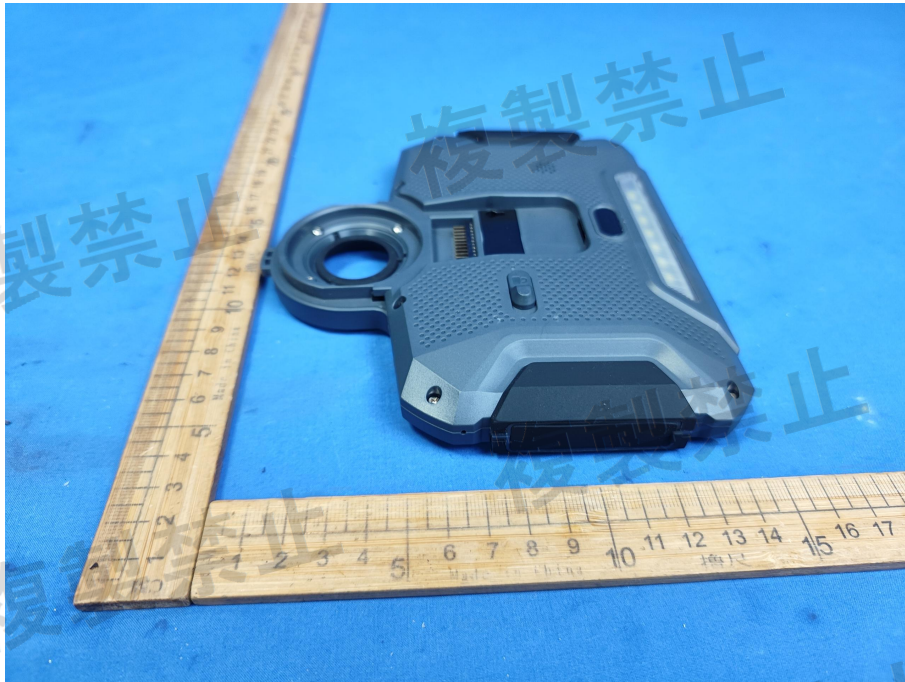


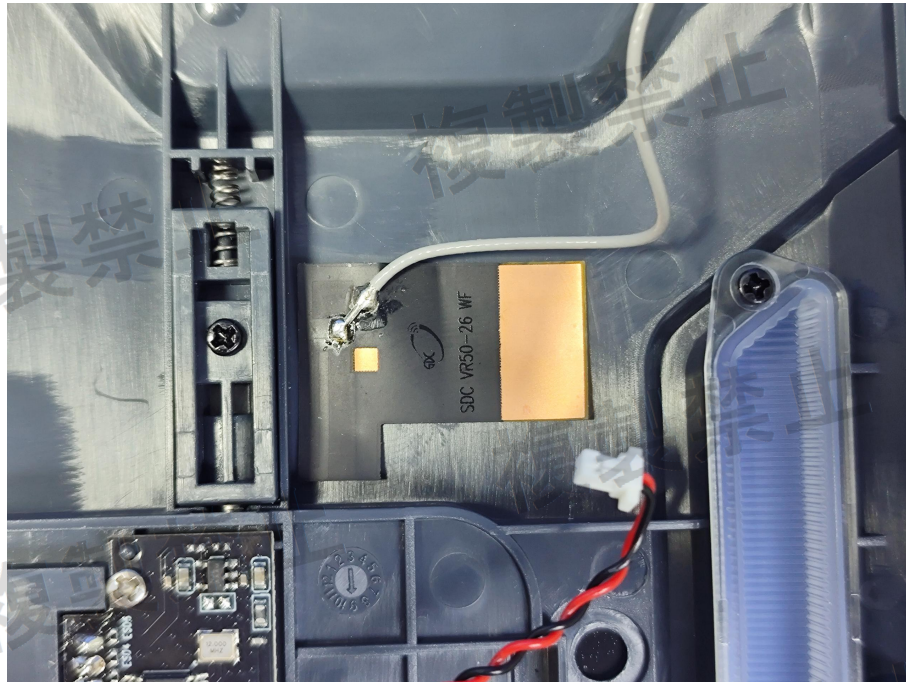

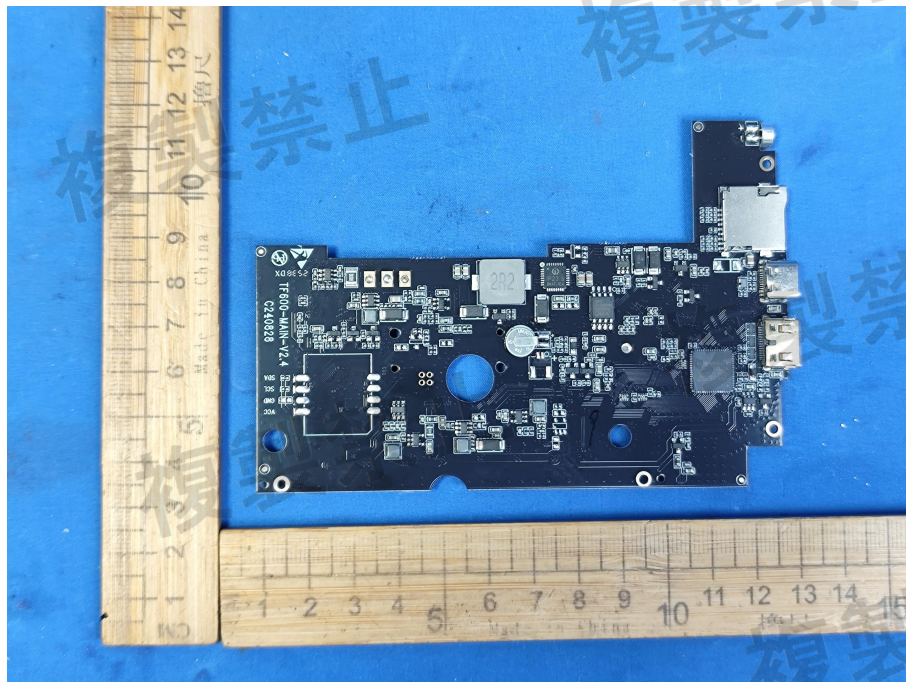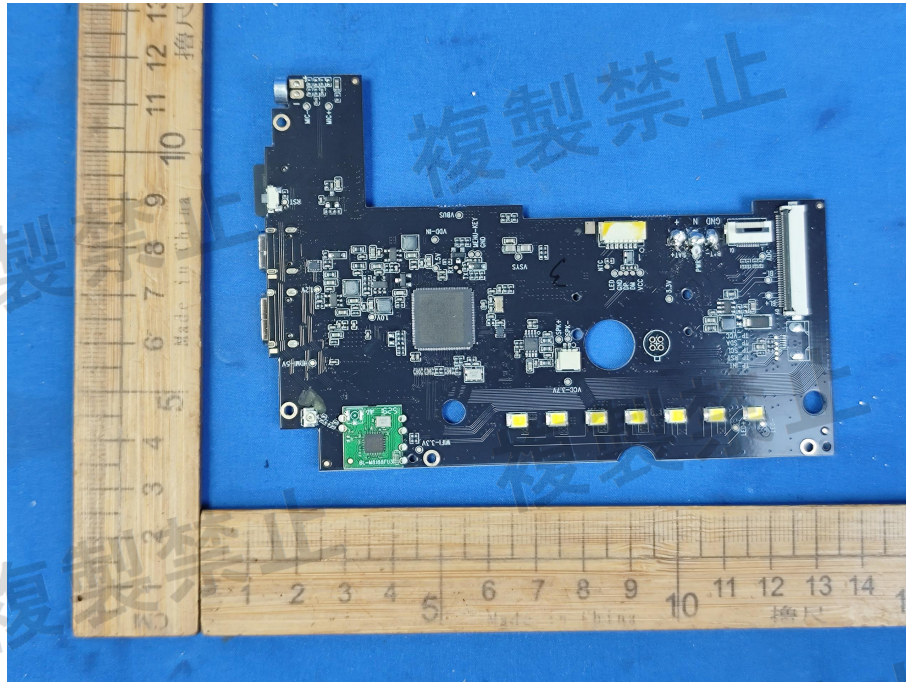

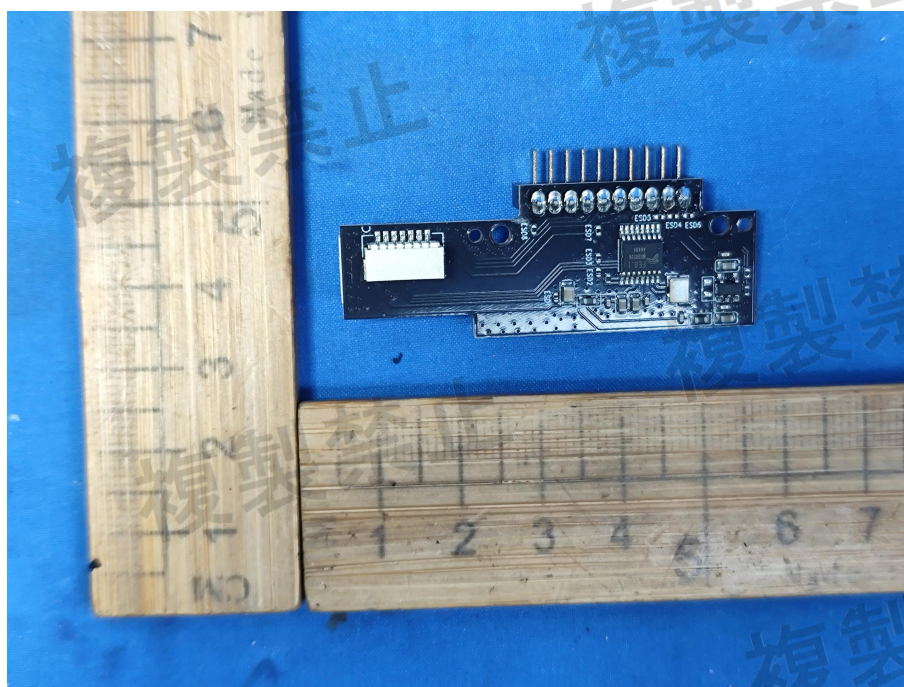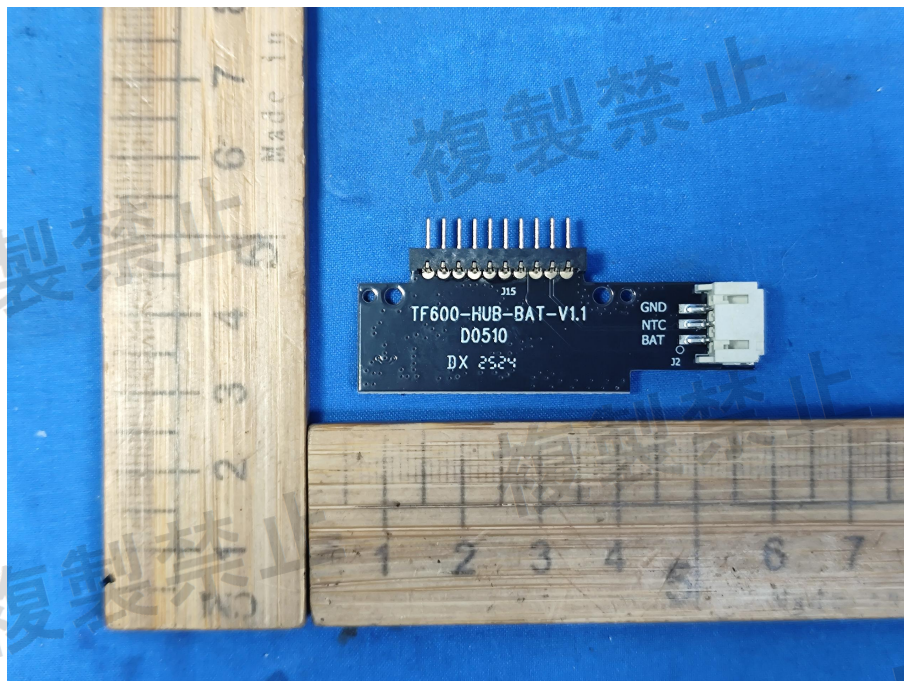

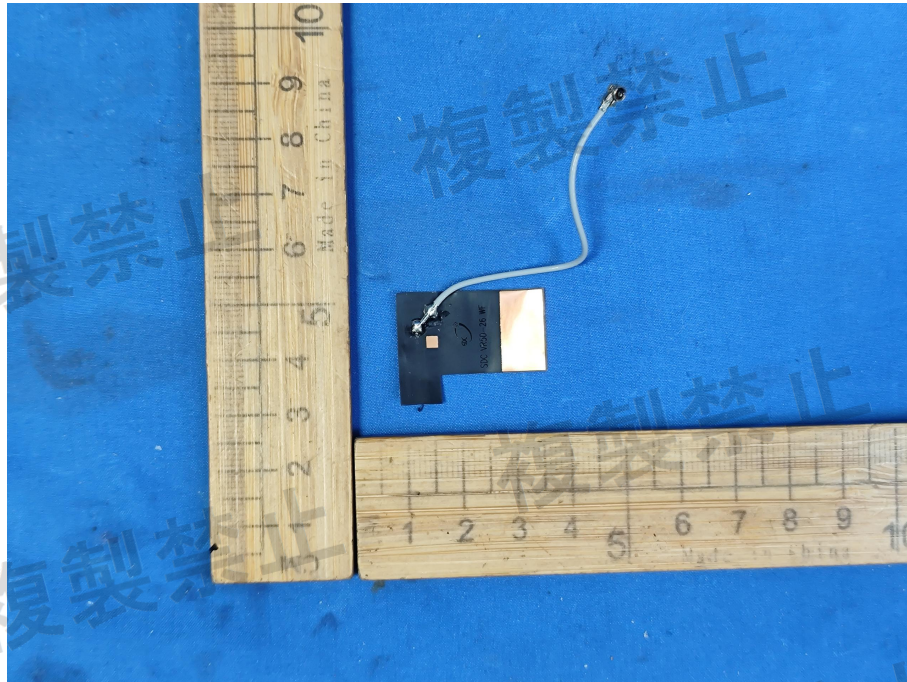

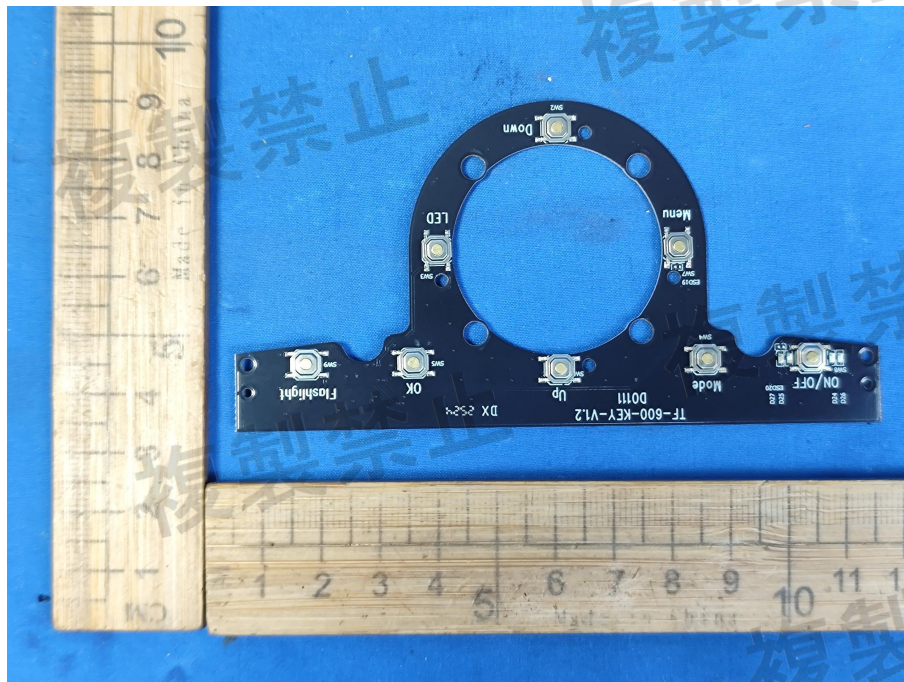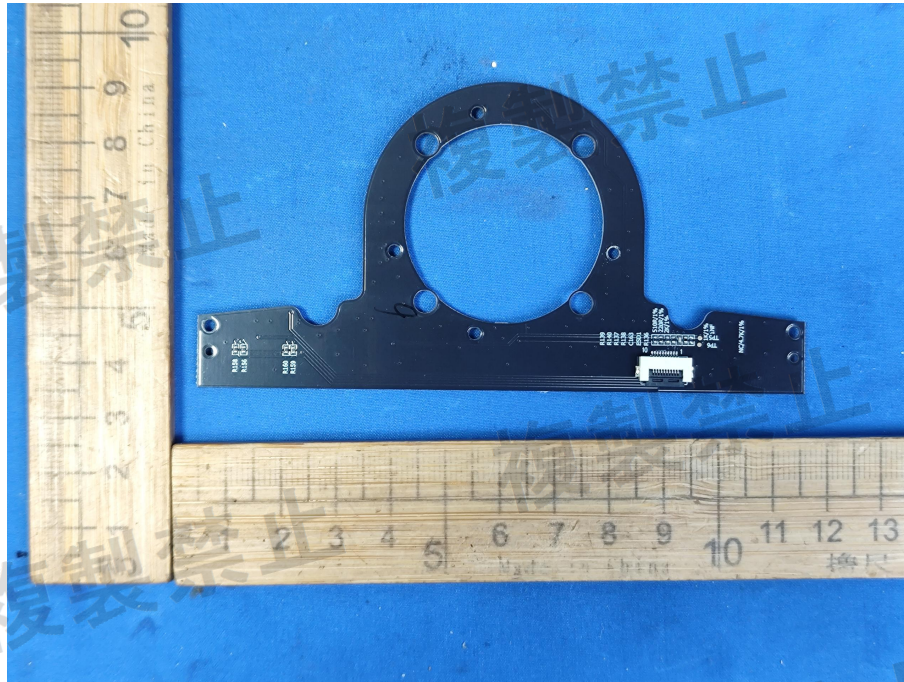

\*\*\* END OF REPORT \*\*\*