

JAPAN Radio Test Report

Telemeter/Telecontrol/Data Trans @433MHz

Applicant / Company : Aritronix LTD, Inc.
 Address : 16055 N Dial Blvd Suite 10, Scottsdale, AZ 85260 USA
 Sample Description : Security system FOB
 Model No. : AGENT99 FOB
 SKU Number : AG9943F, AG9943HF
 Brand Name : Harley Davidson
 Date of Sample Received : 08 December 2025
 Test Period : 08 December 2025 to 12 March 2026
 Test Standard : Article 2 Paragraph 1 of Item 8
 Item 14, Paragraph 1 of Ministry of Posts and Telecommunications
 Notice No. 42
 Radio Regulatory Commission Regulations No. 18 (November 30, 1950)
 Radio Equipment of Specified Low-Power Radio Stations (Article 49.14)
 Test Procedure : Test Method for Characteristics of Radio Equipment for Specified Low-
 Power Wireless Stations Used in Tire Pressure Monitoring Systems or
 Keyless Entry Systems (433 MHz Band)
 Test Site and Location : Intertek Testing Services Shenzhen Ltd. Longhua Branch.
 No.101&201, Building B, No. 308, Wuhe Avenue, Zhangkengjing,
 Guanhu Street, Longhua District, Shenzhen, Guangdong, China.
 Test Result : Pass

Prepared and Checked By:

Approved By:

 Signature
 Robin Zhou
 Senior Project Engineer

 Signature
 Draven Li
 Senior Project Engineer
 17 March 2026 Date

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
 - This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Report No.	Version	Description	Issued Date
251208049SZN-001	Rev.01	Initial issue of report	17 March 2026

General Information

Client Information

Applicant:	Aritronix LTD, Inc.
Address of Applicant:	16055 N Dial Blvd Suite 10, Scottsdale, AZ 85260 USA
Manufacturer:	Aritronix LTD, Inc.
Address of Manufacturer:	16055 N Dial Blvd Suite 10, Scottsdale, AZ 85260 USA
Factory:	Galaxy (Dongguan) Electronic Technology Ltd.
Address of Factory:	No. 1 Jiaolong Road, Jiaoyitang Village, Tangxia Town, DongGuan City, Guangdong Province, P. R. China

General Description of EUT

Product Name:	Security system FOB
Model No.:	AGENT99 FOB
SKU Number:	AG9943F, AG9943HF
Brand Name:	Harley Davidson

The SKU number AG9943HF removes the buttons only based on the SKU number AG9943F. After evaluation, the SKU number AG9943F is used for all test items.


Details of EUT

Designated Frequency:	433.795MHz to 434.045MHz
Type of Modulation:	FSK
Number of Channels:	1
Operating Frequency:	433.92MHz
Antenna Type:	PCB Antenna
Antenna gain:	-3.32dBi max.
Rated antenna power:	0.02mW(-17.0dBm)
Power Supply:	DC 3.0V(1*3.0V Button Cell battery)

Description of Support Units

None

E.U.T. test conditions

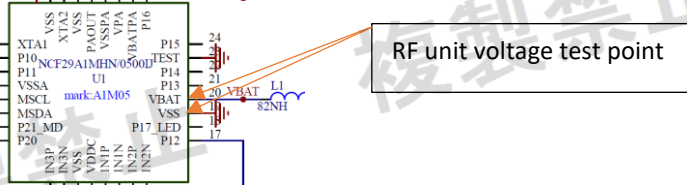Power supply:	DC 3.0V(1*3.0V Button Cell battery)		
	The RF unit is supplied by DC 3.0V. The fluctuation of input voltage to the circuit of RF unit of test equipment is over $\pm 1\%$, when input voltage from DC 3.0V to the test equipment is fluctuated by $\pm 10\%$, So, all measurement has been conducted by rated voltage, low voltage and high voltage.		
	The measurement result of the voltage fluctuation at RF circuit when DC3.0 $\pm 10\%$.		
	Power supply voltage	Measured value	Test Description
	DC 3.0V	DC 3.0V	NTNV
	DC 3.3V	DC 3.3V	NTHV
	DC 2.7V	DC 2.7V	NTLV
Measurement RF unit point voltage:			
Temperature:	-30° to +60°C		
Humidity:	90% RH		
Atmospheric Pressure:	1000 -1010 mbar		
Test frequency:	433.92MHz		

Test Environment

Operating Environment:	
Temperature:	25.0°C
Humidity:	54.0% RH
Atmospheric Pressure:	1001 mbar

TEST RESULTS SUMMARY

Items	Technical Requirement	Result
Designated Frequency Rang	designated frequency band (433.795 – 434.045MHz)	PASS
Antenna Power (E.I.R.P.)	1mW(0dBm) or less (E.I.R.P.)	PASS
Antenna Power Tolerance	+20%, Lower Limit: Not specified	PASS
Occupied Bandwidth	250kHz or less	PASS
Spurious Emission (E.I.R.P.)	30 – 433.795MHz: 250nW(-36dBm)/100kHz (E.I.R.P.) 435.045 - 1000MHz: 250nW(-36dBm)/100kHz (E.I.R.P.) 1 - 3GHz: 1μW(-30dBm)/MHz (E.I.R.P.)	PASS
Transmission Time Restriction	For periodic transmission (One transmission on time: 1 s or less, transmission pause time: 1 ms or more), Total transmission time: per hour 360 s or less	PASS
Interference Prevention Function	Radio equipment of a radio station used mainly in the same premises, which automatically transmits or receives an identification code	PASS
Voltage fluctuation	A transmitter shall be so constructed that the oscillation frequency will be as free from influence by changes in its power supply voltage or load as possible in order to maintain its frequency within the tolerance.	PASS
Housing requirements	It is housed in a single enclosure, and the high-frequency components and modulation section, excluding the antenna, cannot be easily opened.	PASS
Second Radiated Emission Strength (E.I.R.P.)	30 - 1000MHz: 4nW(-54dBm)/100kHz (E.I.R.P.) 1 - 3GHz: 4nW(-54dBm)/MHz (E.I.R.P.)	N/A

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.


Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

N/A: In this whole report N/A means Not Applicable, the communication method of this product is a one-way method.

Designated Frequency Range and Occupied Bandwidth

Test Setup

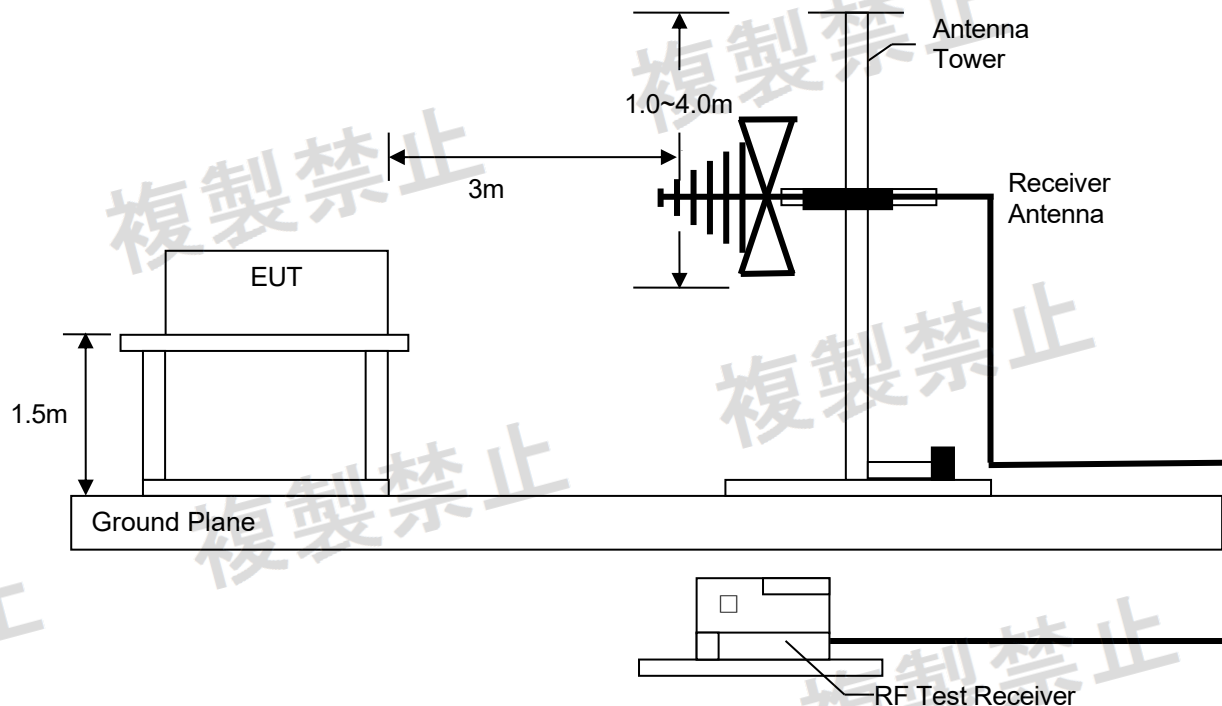

Used Test Equipment


Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date	Calibration body	Calibration Method
SZ185-03	EMI Receiver	R & S	ESR7	2025-04-13	2026-04-13	CEPREI CALIBRATION & TESTING CENTER	C
SZ056-08	Signal Analyzer	R&S	FSV 40	2025-12-01	2026-12-01		C
SZ061-13	Biconilog Antenna	ETS	3142E	2025-05-29	2028-05-29	National Institute of Metrology	C
SZ181-08	Microwave System Amplifier	Agilent	83017A	2025-07-30	2026-07-30	CEPREI CALIBRATION & TESTING CENTER	C
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	2025-06-18	2028-06-18		C

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NITC) in Japan (hereinafter referred to as "NITC") or a designated calibration agency under Article 102-18 paragraph (1) in JRL
 - (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No.51 of 1992)
 - (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration Conducted by the NITC or a designation agency under Article 102-18 paragraph (1)
 - (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the night column of appended table No.3, which shall have been given any type of calibration, etc. listed above from (a) to (c). From JRL Article 24-2, paragraph 4, item 2
- Notice: Calibration duration for above equipments is 1 year or 3 year.

Test Data


Worst case test condition: NTN

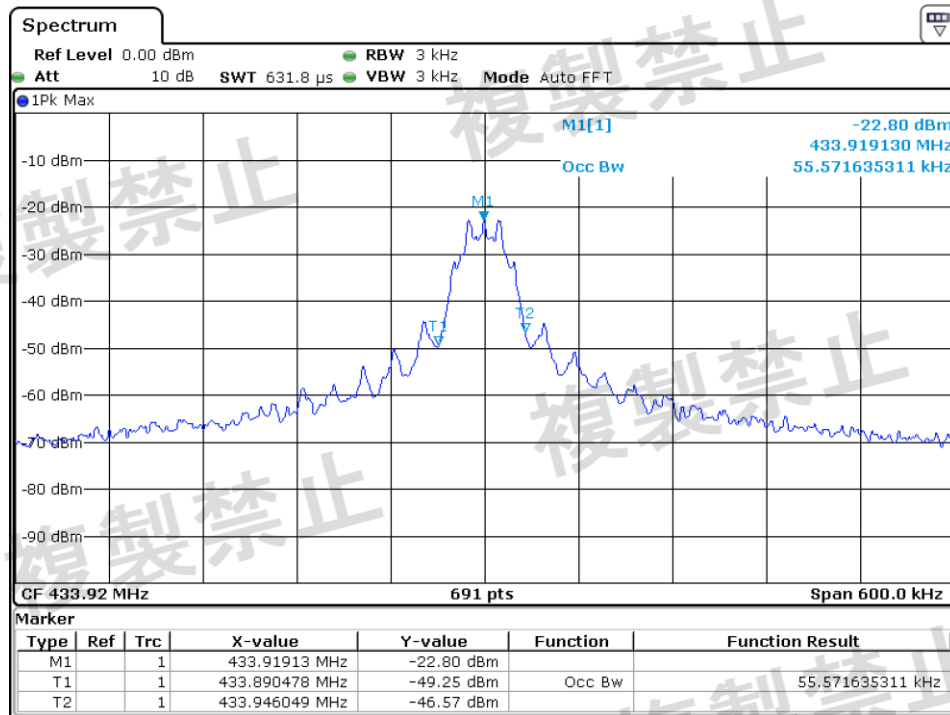

Date: 12.MAR.2026 13:49:07

	Frequency	Limit (MHz)	Within Designated Frequency Range	Occupied Bandwidth (kHz)	Limit	Result
Lowest F_L	433.890	≥ 433.795 MHz	Complied	55.572	250 kHz or less	Complied
Highest F_H	433.946	≤ 434.045 MHz	Complied			


Worst case test condition: NTLV

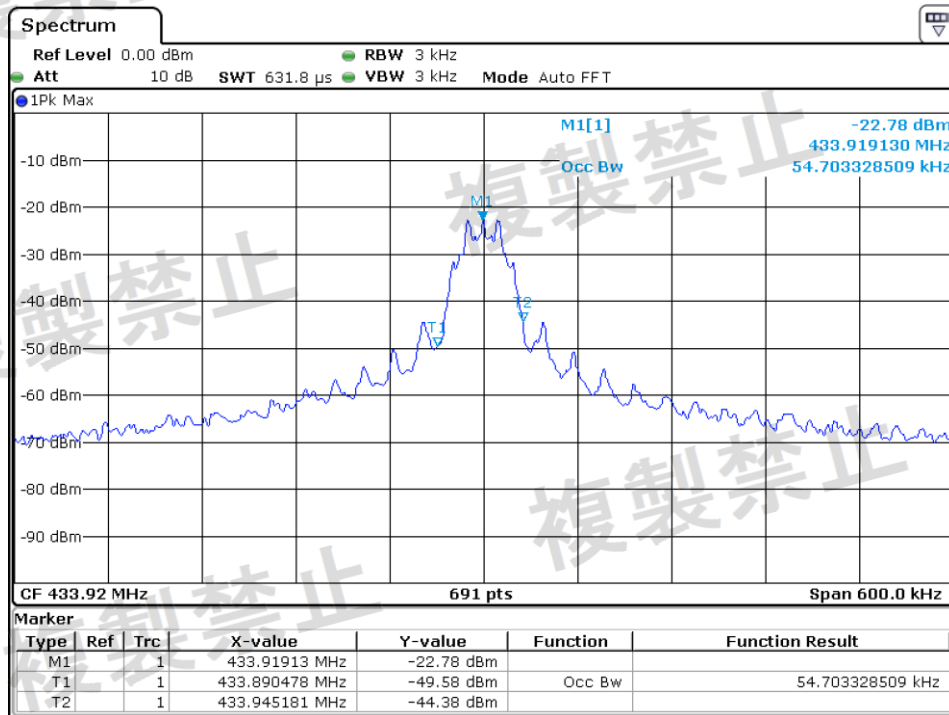

Date: 12.MAR.2026 13:45:57

	Frequency	Limit (MHz)	Within Designated Frequency Range	Occupied Bandwidth (kHz)	Limit	Result
Lowest F_L	433.890	≥ 433.795 MHz	Complied	54.703	250kHz or less	Complied
Highest F_H	433.945	≤ 434.045 MHz	Complied			

Worst case test condition: NTHV

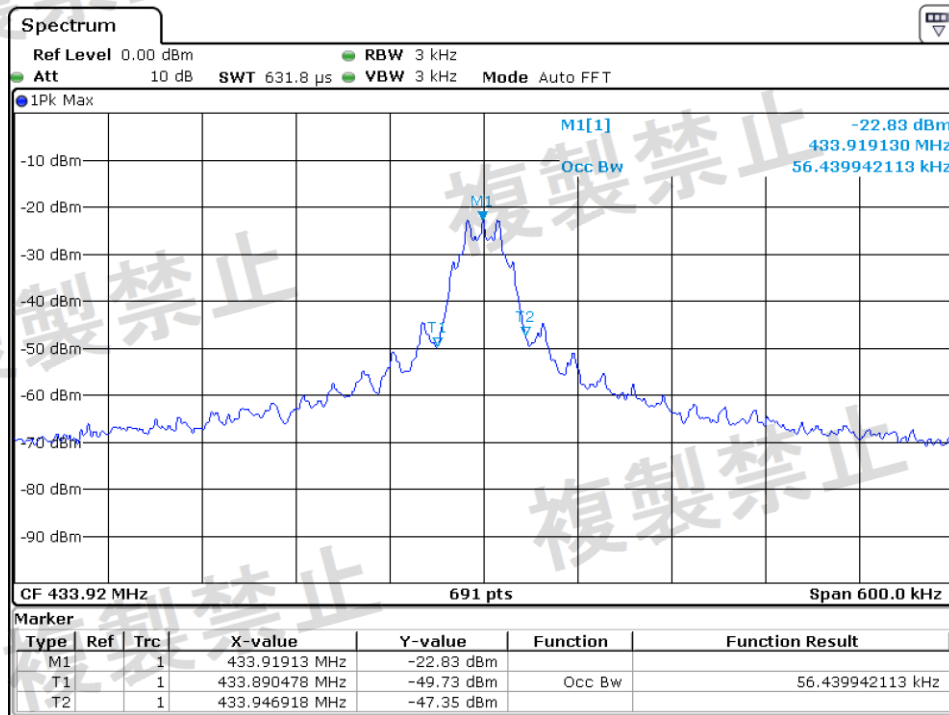


Date: 12.MAR.2026 13:51:18

	Frequency	Limit (MHz)	Within Designated Frequency Range	Occupied Bandwidth (kHz)	Limit	Result
Lowest F_L	433.890	≥ 433.795 MHz	Complied	56.440	250kHz or less	Complied
Highest F_H	433.947	≤ 434.045 MHz	Complied			

Antenna Power (E.I.R.P.) and Antenna Power Tolerance

Test Setup

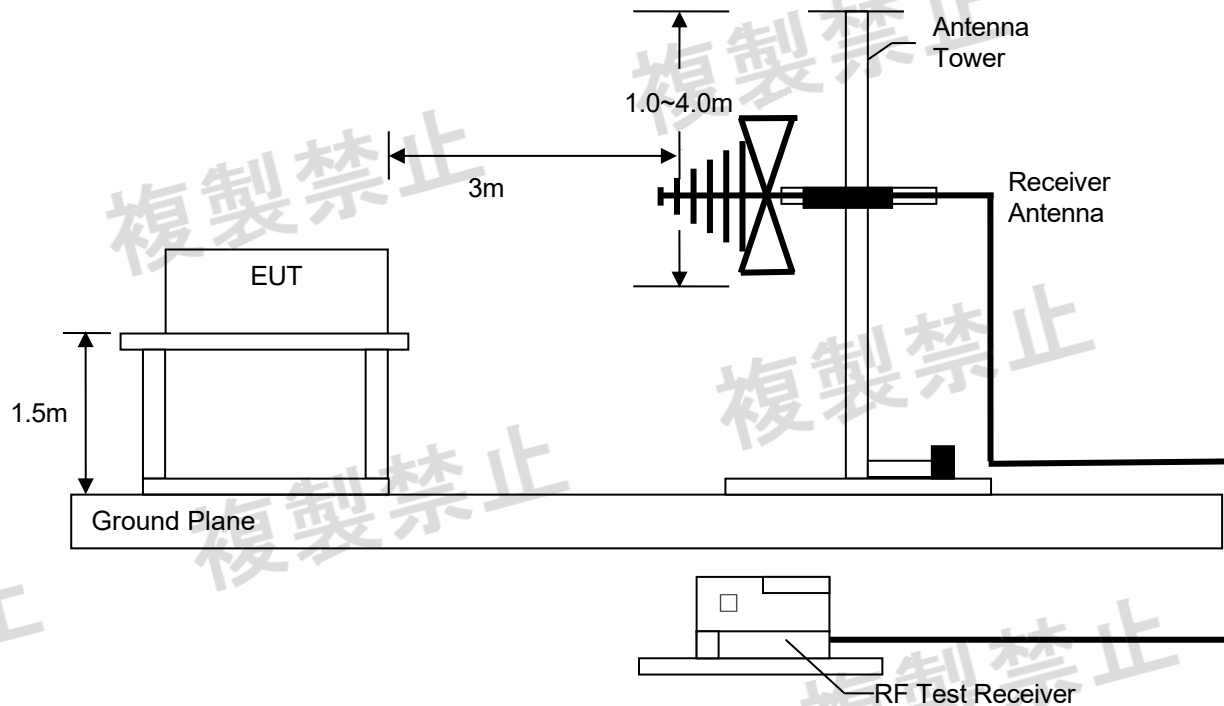

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date	Calibration body	Calibration Method
SZ185-03	EMI Receiver	R & S	ESR7	2025-04-13	2026-04-13	CEPREI CALIBRATION & TESTING CENTER	C
SZ056-08	Signal Analyzer	R&S	FSV 40	2025-12-01	2026-12-01		C
SZ061-13	Biconilog Antenna	ETS	3142E	2025-05-29	2028-05-29	National Institute of Metrology	C
SZ181-08	Microwave System Amplifier	Agilent	83017A	2025-07-30	2026-07-30	CEPREI CALIBRATION & TESTING CENTER	C
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	2025-06-18	2028-06-18		C

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NITC) in Japan (hereinafter referred to as "NITC") or a designated calibration agency under Article 102-18 paragraph (1) in JRL
 - (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No.51 of 1992)
 - (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration Conducted by the NITC or a designation agency under Article 102-18 paragraph (1)
 - (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the night column of appended table No.3, which shall have been given any type of calibration, etc. listed above from (a) to (c). From JRL Article 24-2, paragraph 4, item 2
- Notice: Calibration duration for above equipments is 1 year or 3 year.

Equation

$$\text{EIRP} = p_t \times g_t = (E \times d)^2 / 30$$

where

p_t	is the transmitter output power in watts
g_t	is the numeric gain of the transmitting antenna (dimensionless)
E	is the electric field strength in V/m
d	is the measurement distance in meters (m)

$$\text{ERP} = \text{EIRP} / 1.64 = (E \times d)^2 / (30 \times 1.64) = (E \times d)^2 / 49.2$$

where all terms are as previously defined.

STEP1 Search:

Center Freq: 433.92MHz

Span OBW $\times$ 10=2.5MHz

RBW: 1MHz

VBW: 1MHz

Detector: Positive peak

Mode: Max hold

STEP2:

Center freq: Peak from STEP1

Span: 0

RBW: 1MHz

VBW: 1MHz


Detector: RMS

Test Data


Antenna Power (E.I.R.P.) and Antenna Power Tolerance

Worst Case Polarity: Horizontal

STEP1

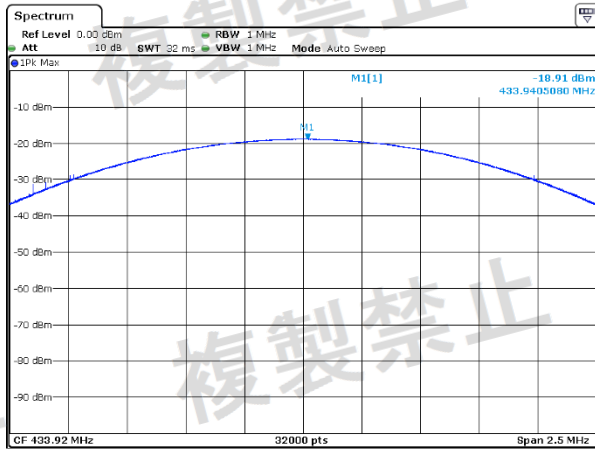

STEP2

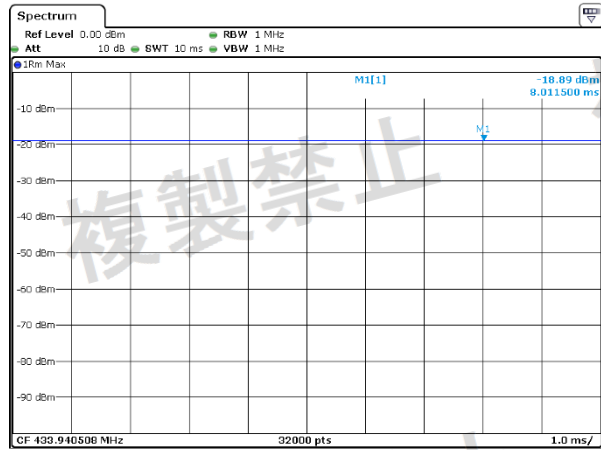


Antenna Power (E.I.R.P.) (dBm)	Antenna Power (E.I.R.P.) (mW)	Limit (mW)	Result
-18.89	0.013	≤1	Pass


Antenna Power Tolerance	Rated antenna power(dBm)	Rated antenna power(mW)	%	Limit (%)	Result
	-17.0	0.02	-35.0	<20	Pass

Worst Case Polarity: Vertical

STEP1

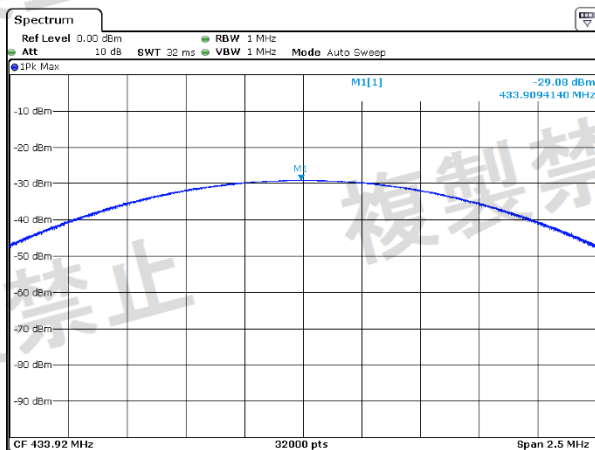

STEP2

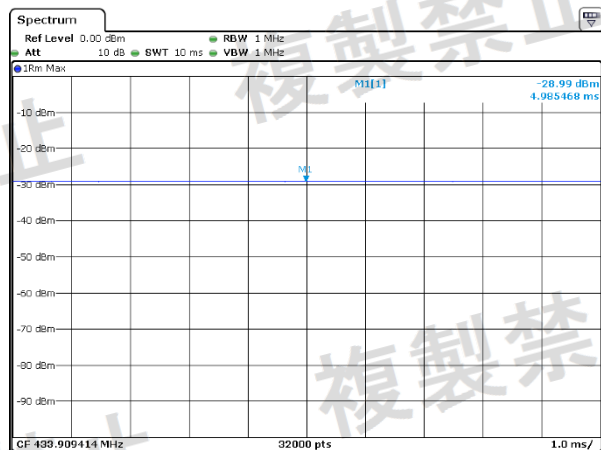

Antenna Power (E.I.R.P.) (dBm)	Antenna Power (E.I.R.P.) (mW)	Limit (mW)	Result
-28.99	0.001	≤1	Pass


Antenna Power Tolerance	Rated antenna power(dBm)	Rated antenna power(mW)	%	Limit (%)	Result
	-17.0	0.02	-95.0	<20	Pass

Test Data


Antenna Power (E.I.R.P.) and Antenna Power Tolerance

Worst Case Polarity: Horizontal

STEP1

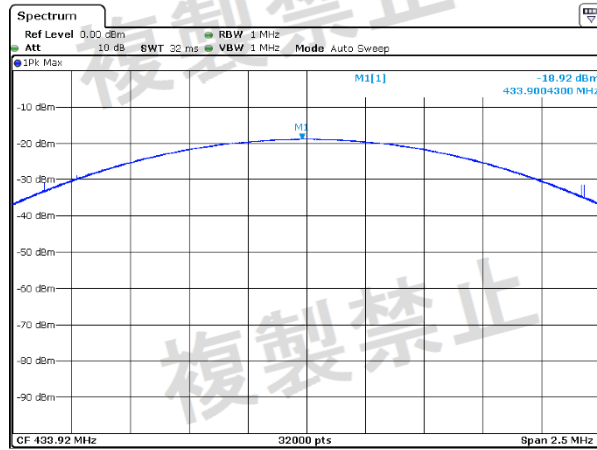

STEP2

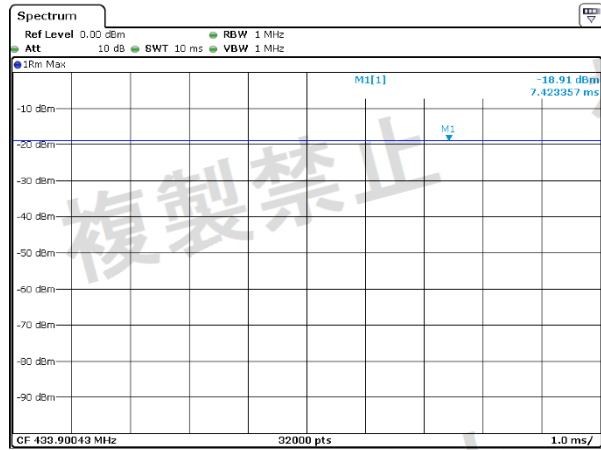


Antenna Power (E.I.R.P.) (dBm)	Antenna Power (E.I.R.P.) (mW)	Limit (mW)	Result
-18.91	0.013	≤1	Pass


Antenna Power Tolerance	Rated antenna power(dBm)	Rated antenna power(mW)	%	Limit (%)	Result
	-17.0	0.02	-35.0	<20	Pass

Worst Case Polarity: Vertical

STEP1

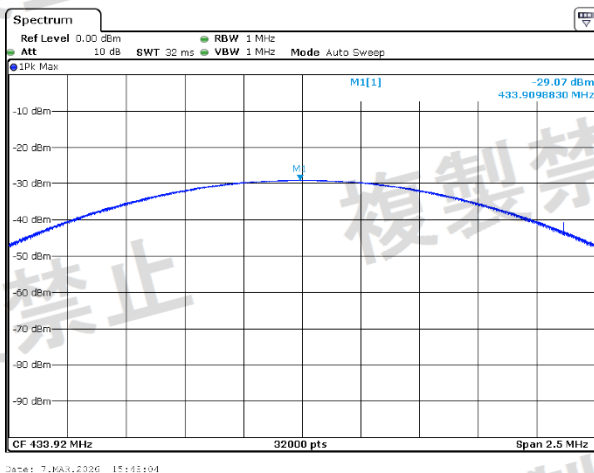

STEP2

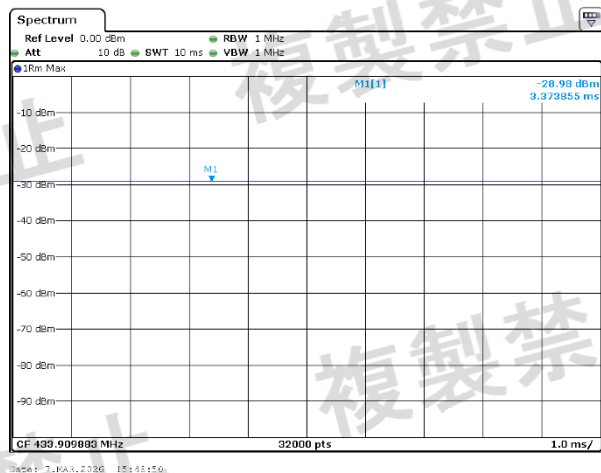

Antenna Power (E.I.R.P.) (dBm)	Antenna Power (E.I.R.P.) (mW)	Limit (mW)	Result
-28.98	0.001	≤1	Pass


Antenna Power Tolerance	Rated antenna power(dBm)	Rated antenna power(mW)	%	Limit (%)	Result
	-17.0	0.02	-95.0	<20	Pass

Test Data


Antenna Power (E.I.R.P.) and Antenna Power Tolerance

Worst Case Polarity: Horizontal

STEP1

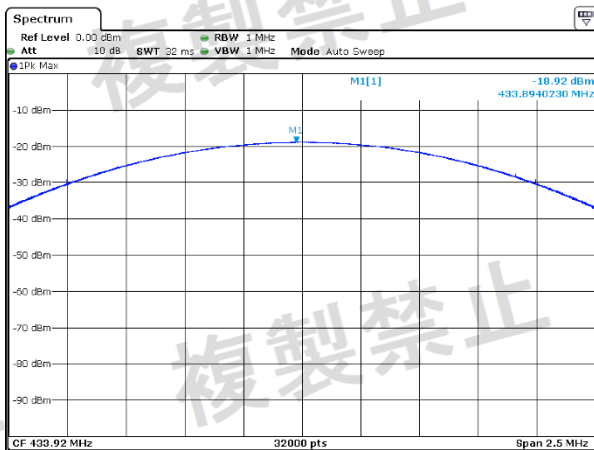

STEP2

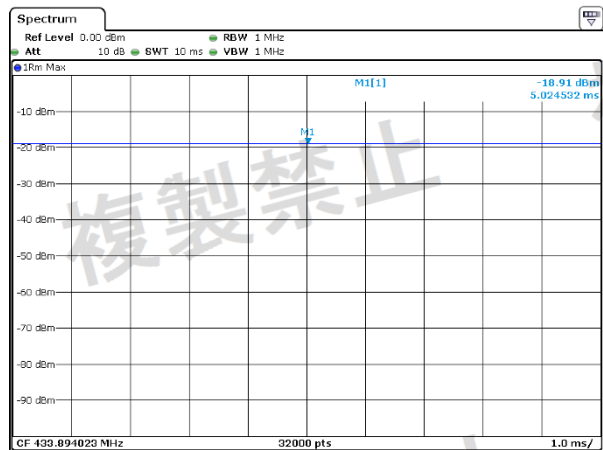


Antenna Power (E.I.R.P.) (dBm)	Antenna Power (E.I.R.P.) (mW)	Limit (mW)	Result
-18.91	0.013	≤1	Pass


Antenna Power Tolerance	Rated antenna power(dBm)	Rated antenna power(mW)	%	Limit (%)	Result
	-17.0	0.02	-35.0	<20	Pass

Worst Case Polarity: Vertical

STEP1

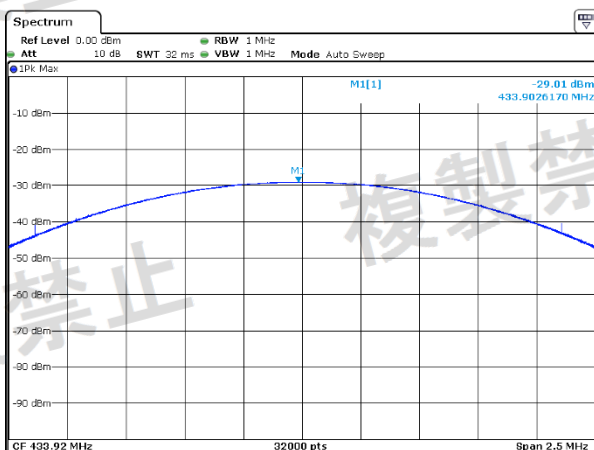

STEP2

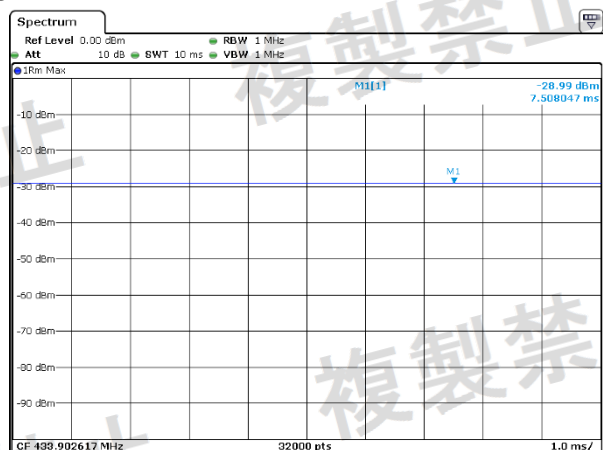


Antenna Power (E.I.R.P.) (dBm)	Antenna Power (E.I.R.P.) (mW)	Limit (mW)	Result
-28.99	0.001	≤1	Pass

Antenna Power Tolerance	Rated antenna power(dBm)	Rated antenna power(mW)	%	Limit (%)	Result
	-17.0	0.02	-95.0	<20	Pass

Spurious Emission (E.I.R.P.) of Tx

Test Setup

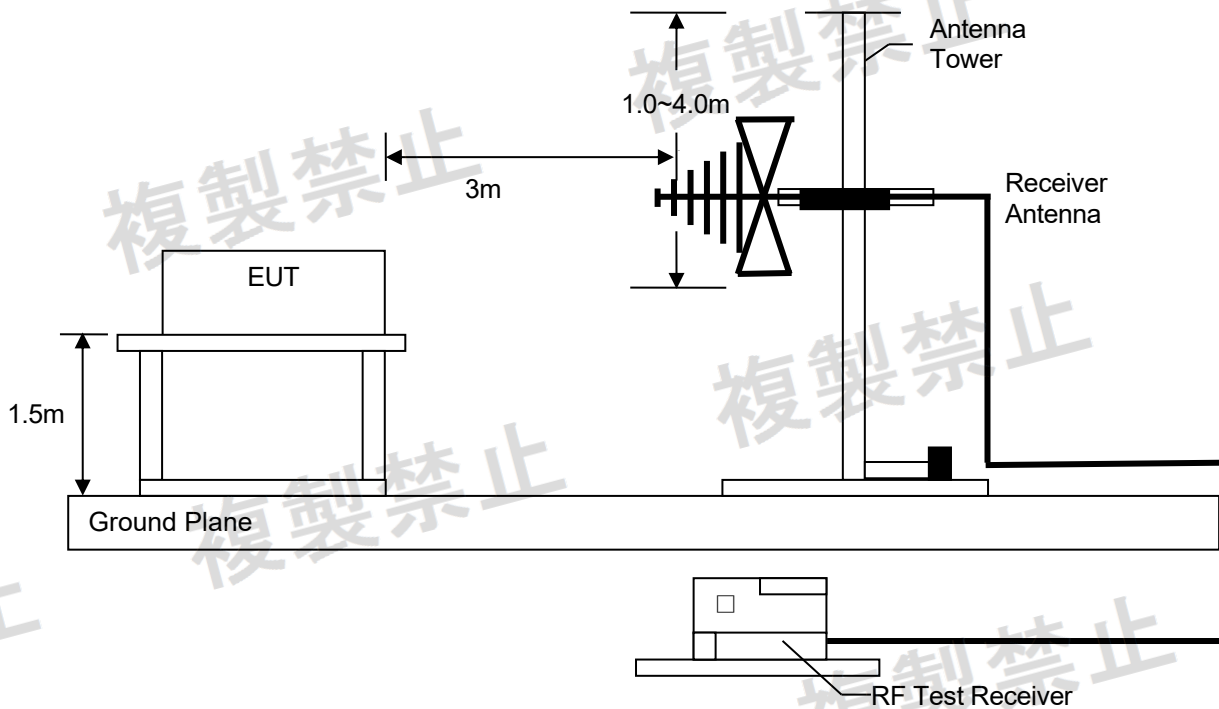

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date	Calibration body	Calibration Method
SZ185-03	EMI Receiver	R & S	ESR7	2025-04-13	2026-04-13	CEPREI CALIBRATION & TESTING CENTER	C
SZ056-08	Signal Analyzer	R&S	FSV 40	2025-12-01	2026-12-01		C
SZ061-13	Biconilog Antenna	ETS	3142E	2025-05-29	2028-05-29	National Institute of Metrology	C
SZ181-08	Microwave System Amplifier	Agilent	83017A	2025-07-30	2026-07-30	CEPREI CALIBRATION & TESTING CENTER	C
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	2025-06-18	2028-06-18		C

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NITC) in Japan (hereinafter referred to as "NITC") or a designated calibration agency under Article 102-18 paragraph (1) in JRL
 - (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No.51 of 1992)
 - (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration Conducted by the NITC or a designation agency under Article 102-18 paragraph (1)
 - (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the night column of appended table No.3, which shall have been given any type of calibration, etc. listed above from (a) to (c). From JRL Article 24-2, paragraph 4, item 2
- Notice: Calibration duration for above equipments is 1 year or 3 year.

Equation

$$\text{EIRP} = p_t \times g_t = (E \times d)^2 / 30$$

where

p_t	is the transmitter output power in watts
g_t	is the numeric gain of the transmitting antenna (dimensionless)
E	is the electric field strength in V/m
d	is the measurement distance in meters (m)

$$\text{ERP} = \text{EIRP} / 1.64 = (E \times d)^2 / (30 \times 1.64) = (E \times d)^2 / 49.2$$


where all terms are as previously defined.

Worst case test condition: NTNV


Operating Mode: Tx

Test Data Spurious Emission (E.I.R.P.) of Tx


Worst Case Polarity: Horizontal

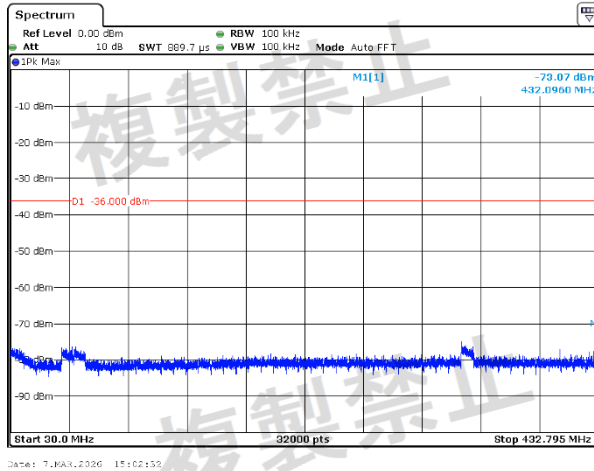

(30MHz to 432.795MHz)

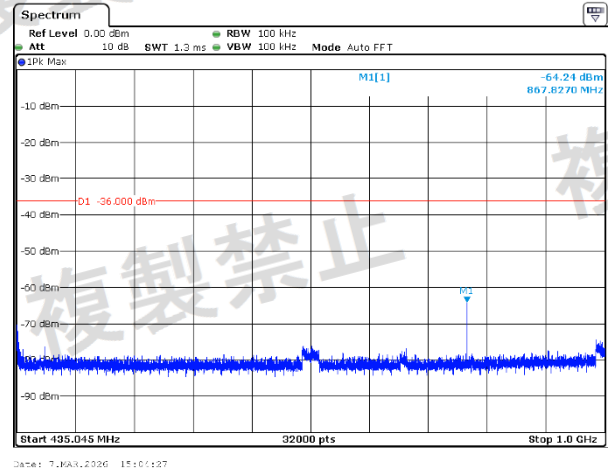

(435.045MHz to 1GHz)

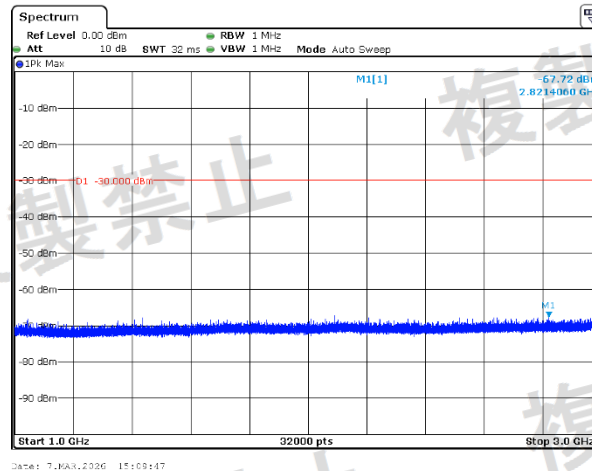

(1GHz to 3GHz)

Spurious frequencies	Measured values	Limit	Judgment
432.0960 MHz	-73.07 dBm	<-36.00 dBm	Pass
867.8270 MHz	-64.24 dBm	<-36.00 dBm	Pass
2.8214060 GHz	-67.72 dBm	<-30.00 dBm	Pass


Worst case test condition: NTNV

Operating Mode: Tx


Test Data

Spurious Emission (E.I.R.P.) of Tx


Worst Case Polarity: Vertical

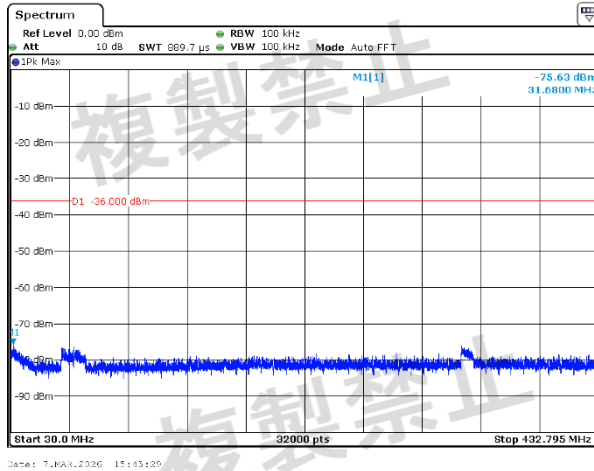

(30MHz to 432.795MHz)

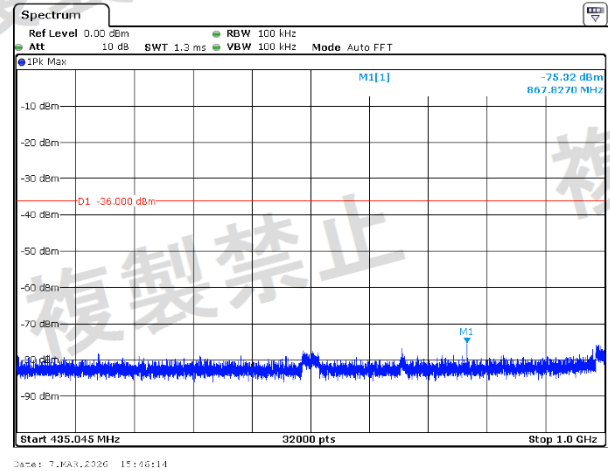

(435.045MHz to 1GHz)

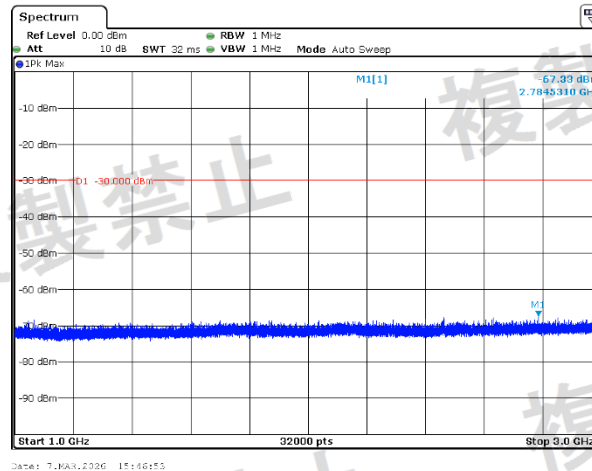

(1GHz to 3GHz)

Spurious frequencies	Measured values	Limit	Judgment
31.6800 MHz	-75.63 dBm	<-36.00 dBm	Pass
867.8270 MHz	-75.32 dBm	<-36.00 dBm	Pass
2.7845310 GHz	-67.33 dBm	<-30.00 dBm	Pass


Worst case test condition: NTLV

Operating Mode: Tx


Test Data

Spurious Emission (E.I.R.P.) of Tx


Worst Case Polarity: Horizontal

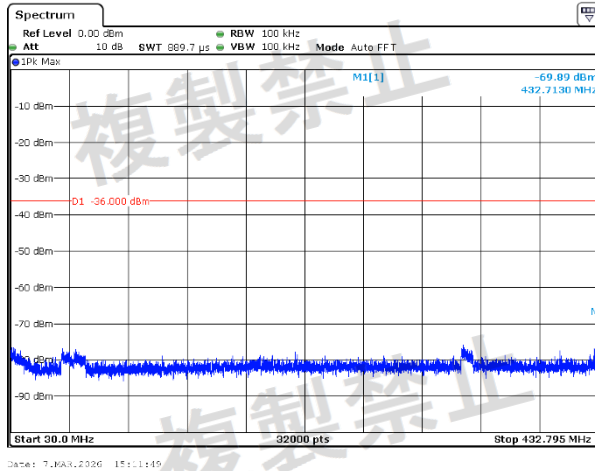

(30MHz to 432.795MHz)

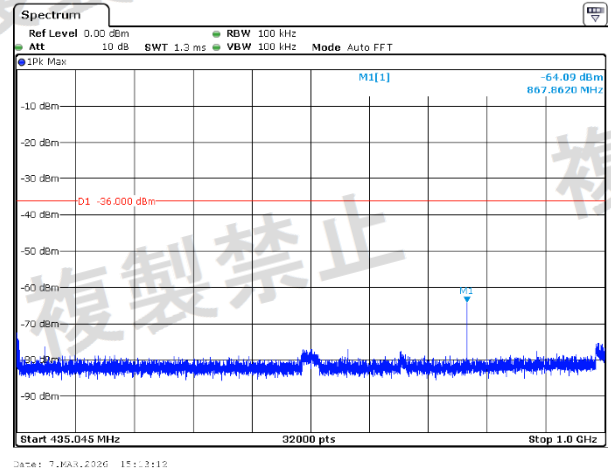

(435.045MHz to 1GHz)

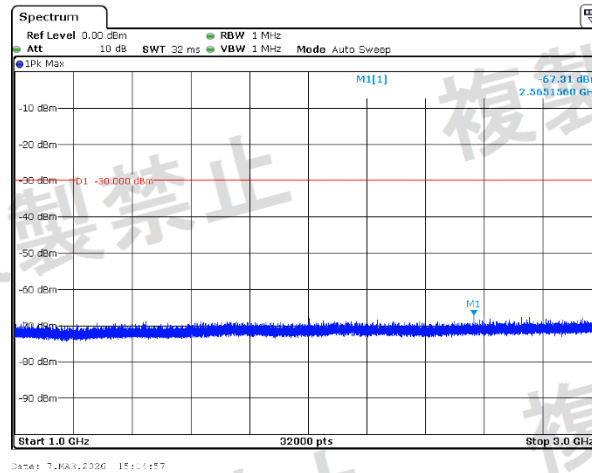

(1GHz to 3GHz)


Spurious frequencies	Measured values	Limit	Judgment
432.7130 MHz	-69.89 dBm	<-36.00 dBm	Pass
867.8620 MHz	-64.09 dBm	<-36.00 dBm	Pass
2.5651560 GHz	-67.31 dBm	<-30.00 dBm	Pass

Worst case test condition: NTLV


Operating Mode: Tx

Test Data Spurious Emission (E.I.R.P.) of Tx


Worst Case Polarity: Vertical

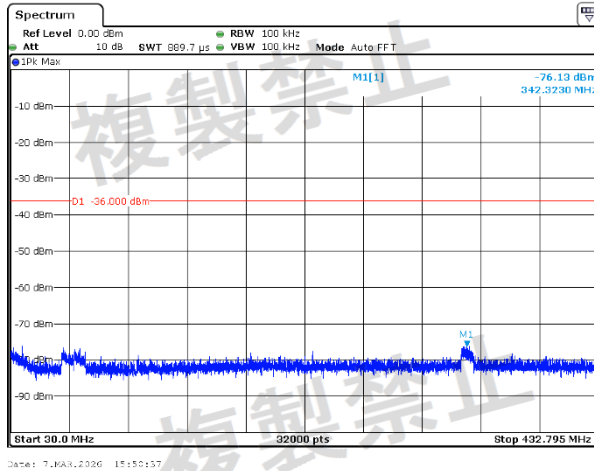

(30MHz to 432.795MHz)

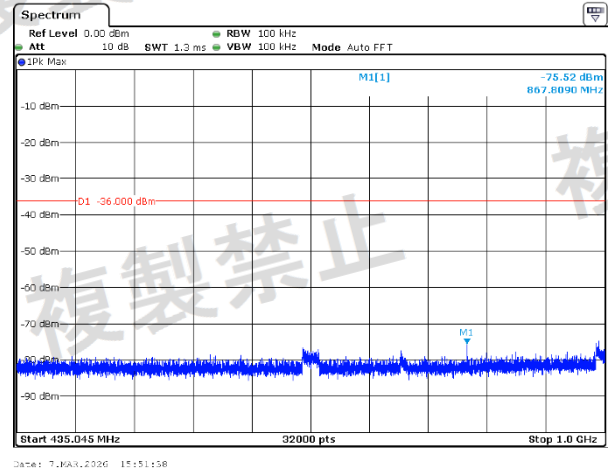

(435.045MHz to 1GHz)

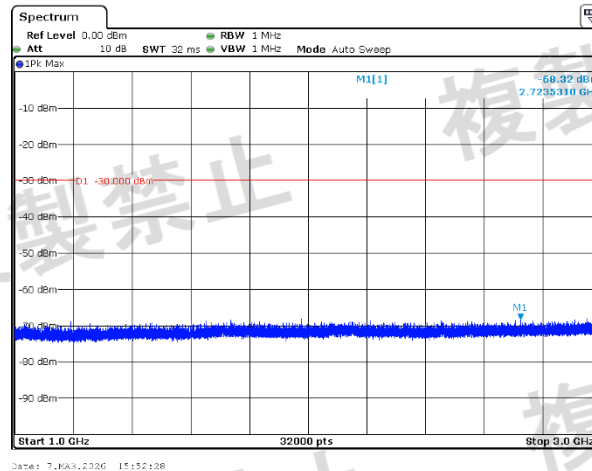

(1GHz to 3GHz)


Spurious frequencies	Measured values	Limit	Judgment
342.3230 MHz	-76.13 dBm	<-36.00 dBm	Pass
867.8090 MHz	-75.52 dBm	<-36.00 dBm	Pass
2.7235310 GHz	-68.32 dBm	<-30.00 dBm	Pass

Worst case test condition: NTHV


Operating Mode: Tx

Test Data Spurious Emission (E.I.R.P.) of Tx


Worst Case Polarity: Horizontal

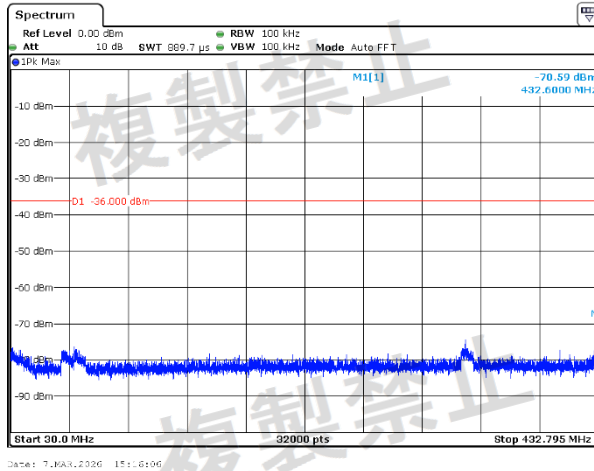

(30MHz to 432.795MHz)

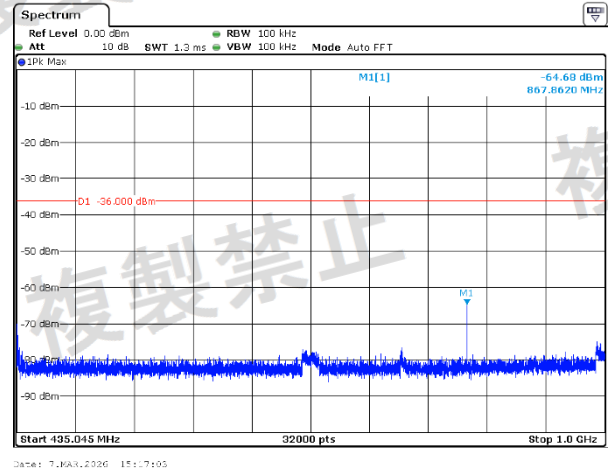

(435.045MHz to 1GHz)

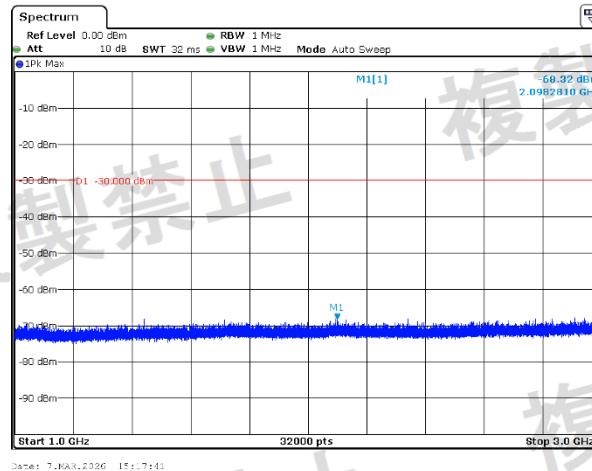

(1GHz to 3GHz)

Spurious frequencies	Measured values	Limit	Judgment
432.6000 MHz	-70.59 dBm	<-36.00 dBm	Pass
867.8620 MHz	-64.68 dBm	<-36.00 dBm	Pass
2.0982810 GHz	-68.32 dBm	<-30.00 dBm	Pass


Worst case test condition: NTHV

Operating Mode: Tx


Test Data

Spurious Emission (E.I.R.P.) of Tx


Worst Case Polarity: Vertical

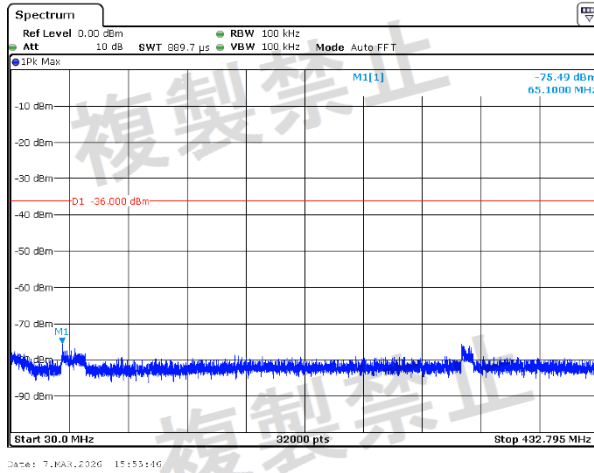

(30MHz to 432.795MHz)

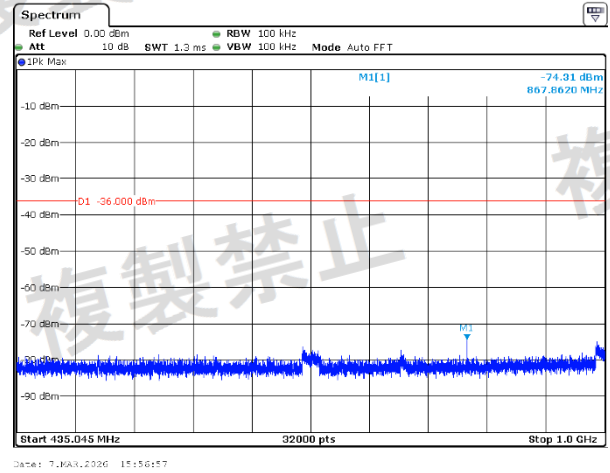

(435.045MHz to 1GHz)

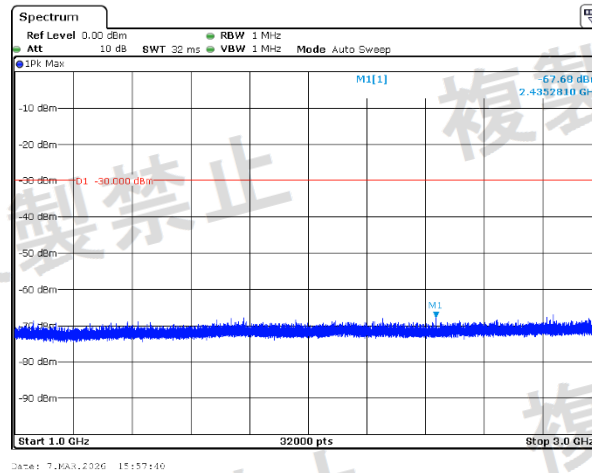


(1GHz to 3GHz)

Spurious frequencies	Measured values	Limit	Judgment
65.1000 MHz	-75.49 dBm	<-36.00 dBm	Pass
867.8620 MHz	-74.31 dBm	<-36.00 dBm	Pass
2.4352810 GHz	-67.68 dBm	<-30.00 dBm	Pass

Interference prevention function


- 1) Measurement system diagram
When transmitting identification code



- 2) Condition of measuring instrument
Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.
- 3) Condition of test equipment the mode of normal use.
- 4) Measuring operation procedure
When test equipment has the function to transmit identification code automatically:
A) Transmit the predetermined identification code from test equipment.
B) Confirm the transmitted identification code by demodulator.
- 5) Test result: The unit does meet the requirements.

Transmission Time Restriction

Test Setup

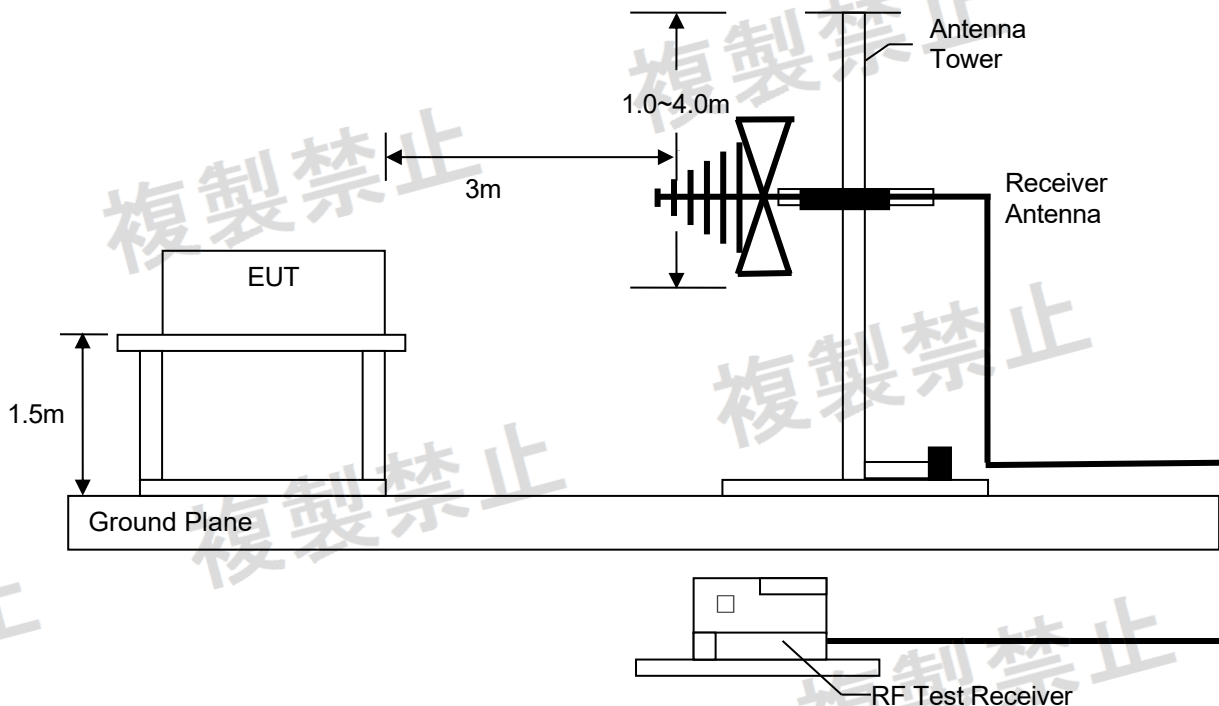

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date	Calibration body	Calibration Method
SZ185-03	EMI Receiver	R & S	ESR7	2025-04-13	2026-04-13	CEPREI CALIBRATION & TESTING CENTER	C
SZ056-08	Signal Analyzer	R&S	FSV 40	2025-12-01	2026-12-01		C
SZ061-13	Biconilog Antenna	ETS	3142E	2025-05-29	2028-05-29	National Institute of Metrology	C
SZ181-08	Microwave System Amplifier	Agilent	83017A	2025-07-30	2026-07-30	CEPREI CALIBRATION & TESTING CENTER	C
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	2025-06-18	2028-06-18		C

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NITC) in Japan (hereinafter referred to as "NITC") or a designated calibration agency under Article 102-18 paragraph (1) in JRL
 - (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No.51 of 1992)
 - (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration Conducted by the NITC or a designation agency under Article 102-18 paragraph (1)
 - (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the night column of appended table No.3, which shall have been given any type of calibration, etc. listed above from (a) to (c). From JRL Article 24-2, paragraph 4, item 2
- Notice: Calibration duration for above equipments is 1 year or 3 year.


Test Requirement (Article 49-14)

Limit:	One transmission on time: 1 s or less, transmission pause time: 1 ms or more Total transmission time: per hour 360 s or less
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Procedure:	1. Test Conditions: Spectrum Analyzer is used for measurement. 2. EUT conditions: Modulation For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal. 3. Spectrum Analyzer conditions: Frequency: Test Frequency Span: 0 RBW: 1 MHz VBW: 1 MHz Sweep Time: 10s Sweep Mode: Single sweep Detector mode: Positive peak Indication mode: Max hold

Worst case test condition: NTNV


Test Data

Case 1:

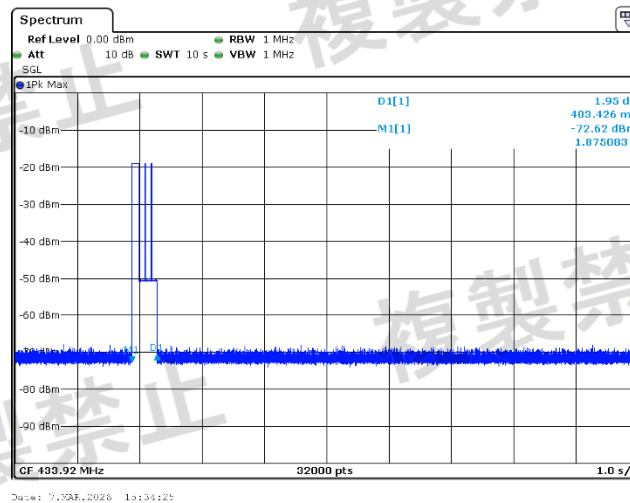

Transmission time		Limit	Test Result
Total transmission time per hour	403.426 ms	≤ 360 s.	Pass


Case 2:

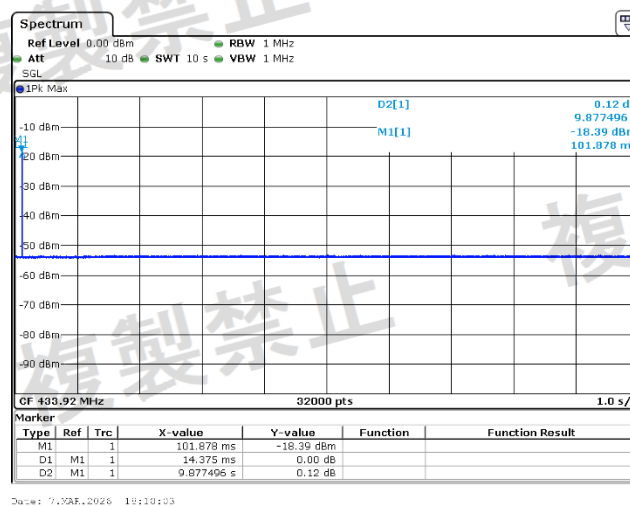

Transmission time		Limit	Test Result
One transmission on time	14.375 ms	≤ 1 sec.	Pass
Transmission pause time	9.877496 s	≥ 1ms	Pass
Total transmission time per hour	27.79 s	≤ 360 s.	Pass


Test Data

Case 1:

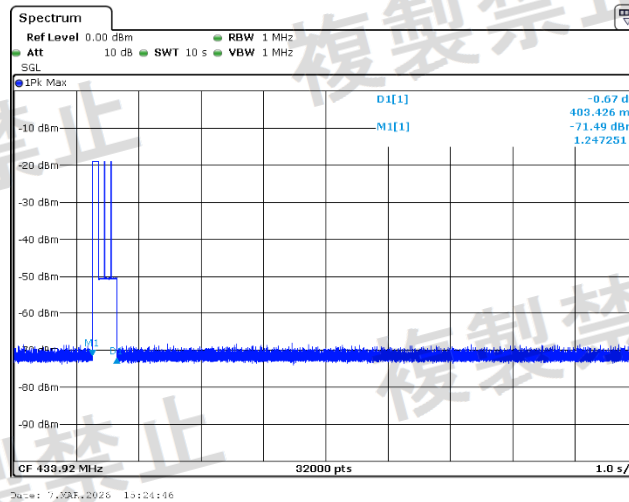

Transmission time		Limit	Test Result
Total transmission time per hour	403.426 ms	≤ 360 s.	Pass


Case 2:

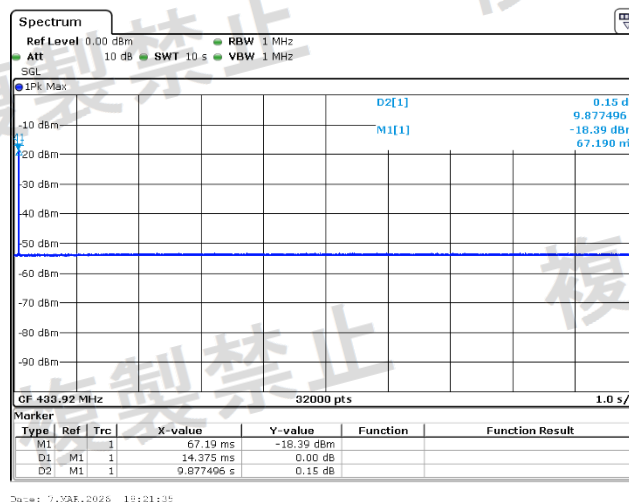

Transmission time		Limit	Test Result
One transmission on time	14.375 ms	≤ 1 sec.	Pass
Transmission pause time	9.877496 s	≥ 1ms	Pass
Total transmission time per hour	27.79 s	≤ 360 s.	Pass


Test Data

Case 1:

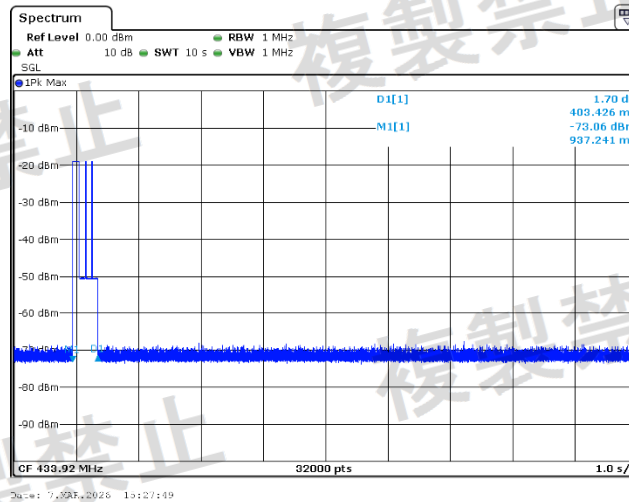

Transmission time		Limit	Test Result
Total transmission time per hour	403.426 ms	≤ 360 s.	Pass

Case 2:

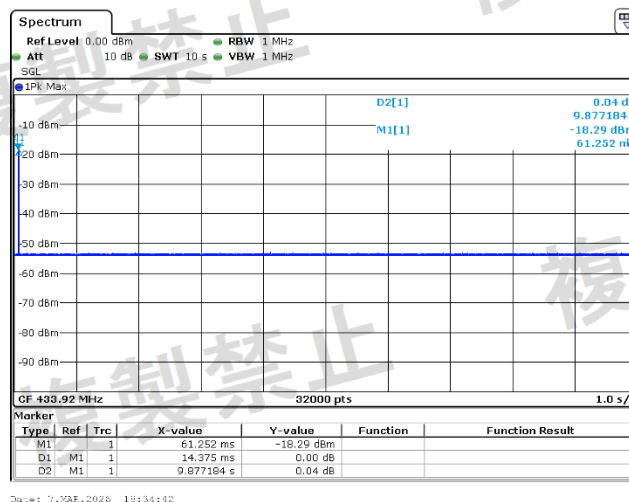

Transmission time		Limit	Test Result
One transmission on time	14.375 ms	≤ 1 sec.	Pass
Transmission pause time	9.877184 s	≥ 1ms	Pass
Total transmission time per hour	27.79 s	≤ 360 s.	Pass

Protective Construction

Test Requirement: Article 49-14

The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.


Note: the covers are fixed with torx screws, the user cannot open the device with common tools.



Torx Screws

Test Photos

Front Side

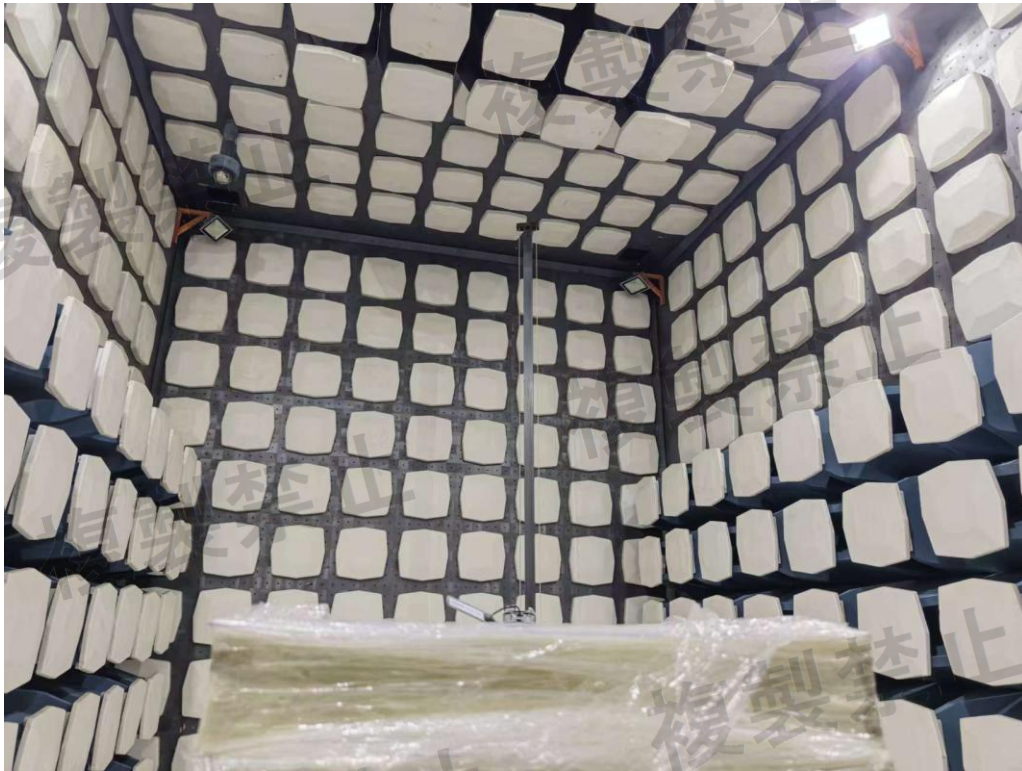

Back Side



Photos of EUT


External Photo (SKU number: AG9943F)



External Photo (SKU number: AG9943F)



External Photo (SKU number: AG9943F)

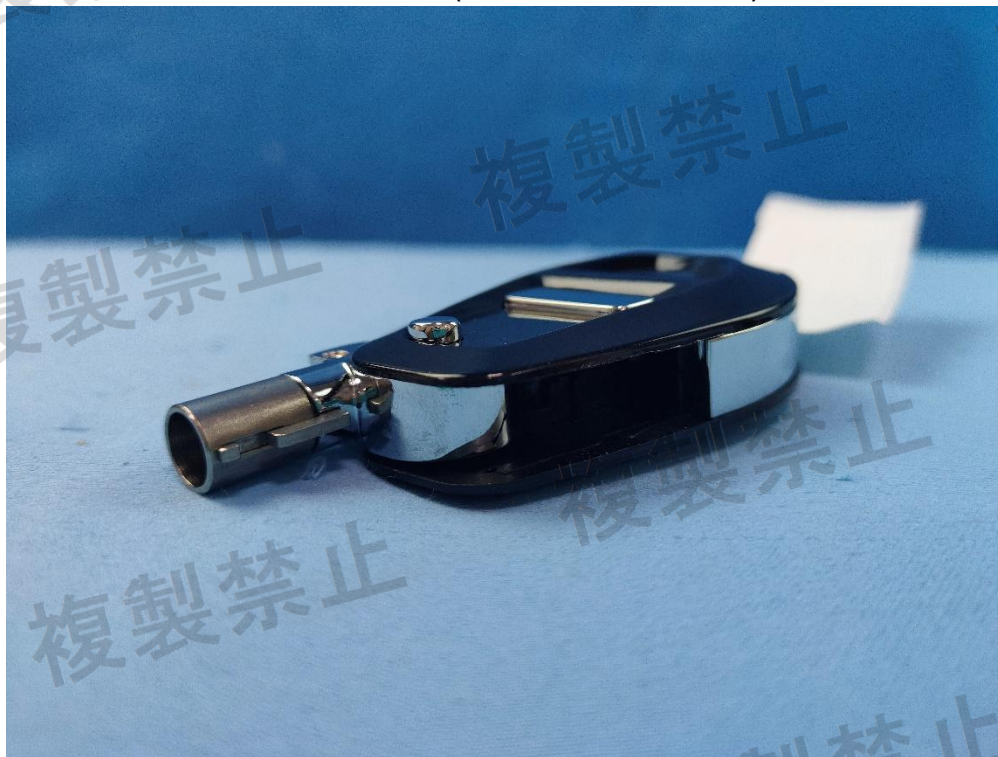

External Photo (SKU number: AG9943F)



External Photo (SKU number: AG9943HF)



External Photo (SKU number: AG9943HF)



External Photo (SKU number: AG9943HF)



External Photo (SKU number: AG9943HF)



Internal Photo




Internal Photo




Internal Photo



Internal Photo

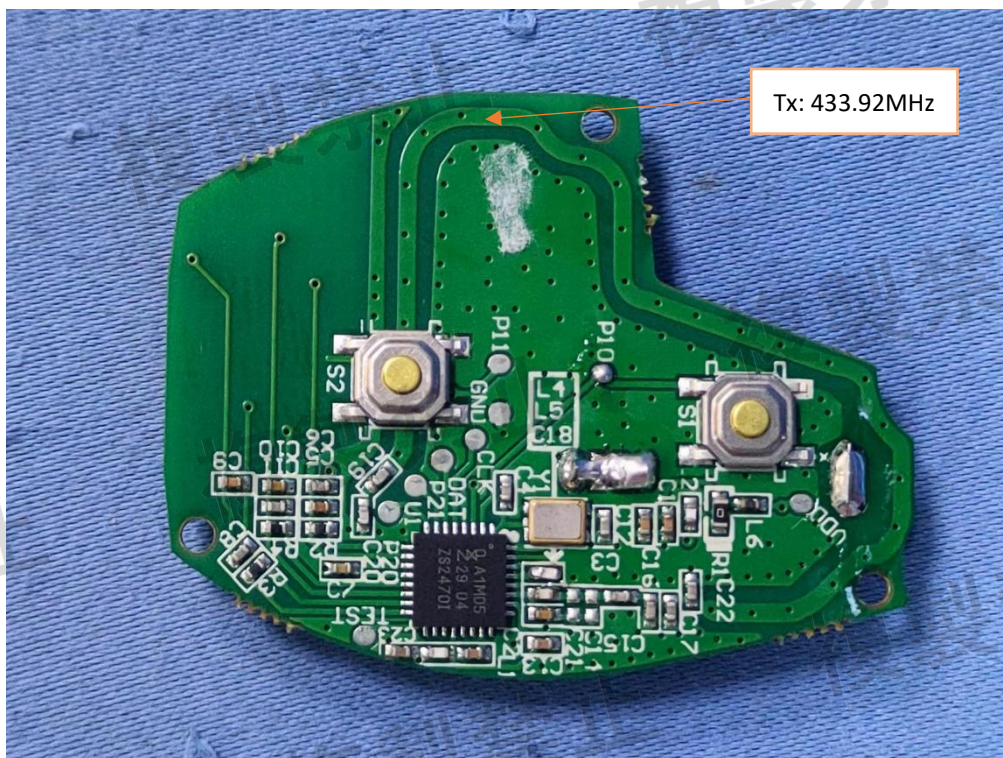

Internal Photo

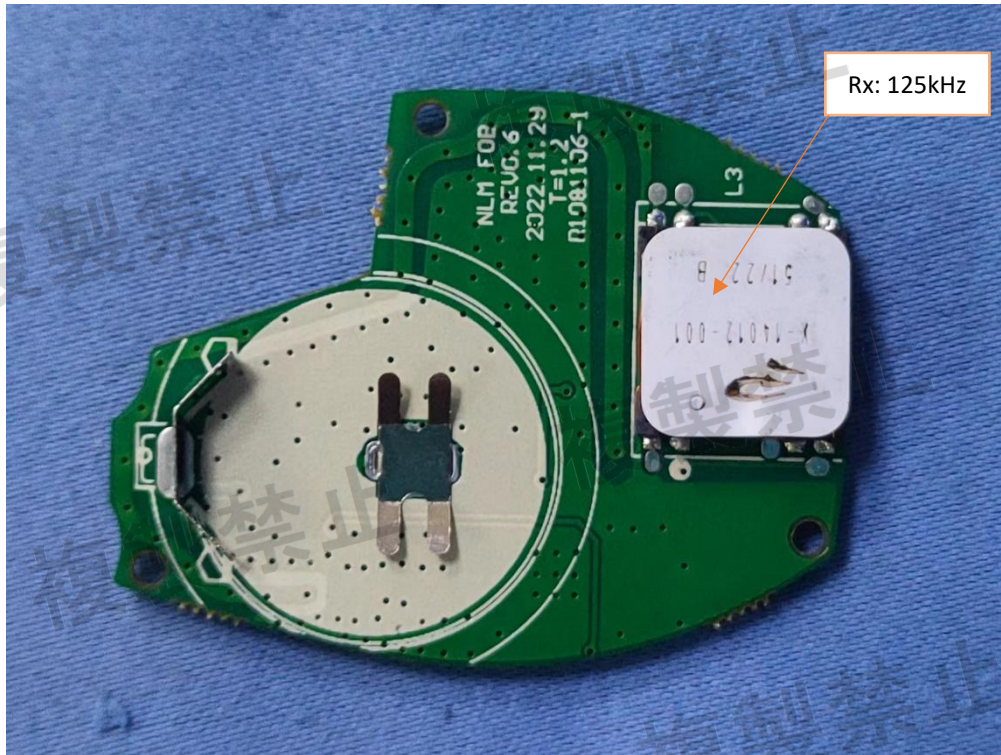

***** End of Report *****