Channel 138 (Chain A)

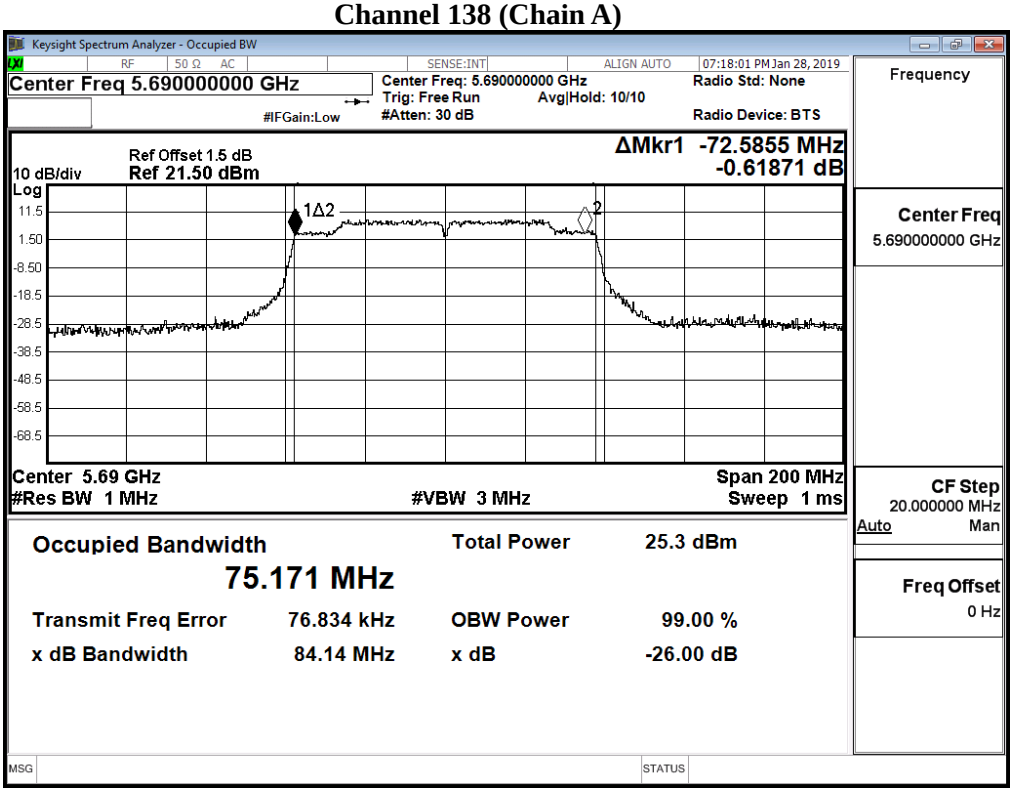

Channel 138 (Chain B)

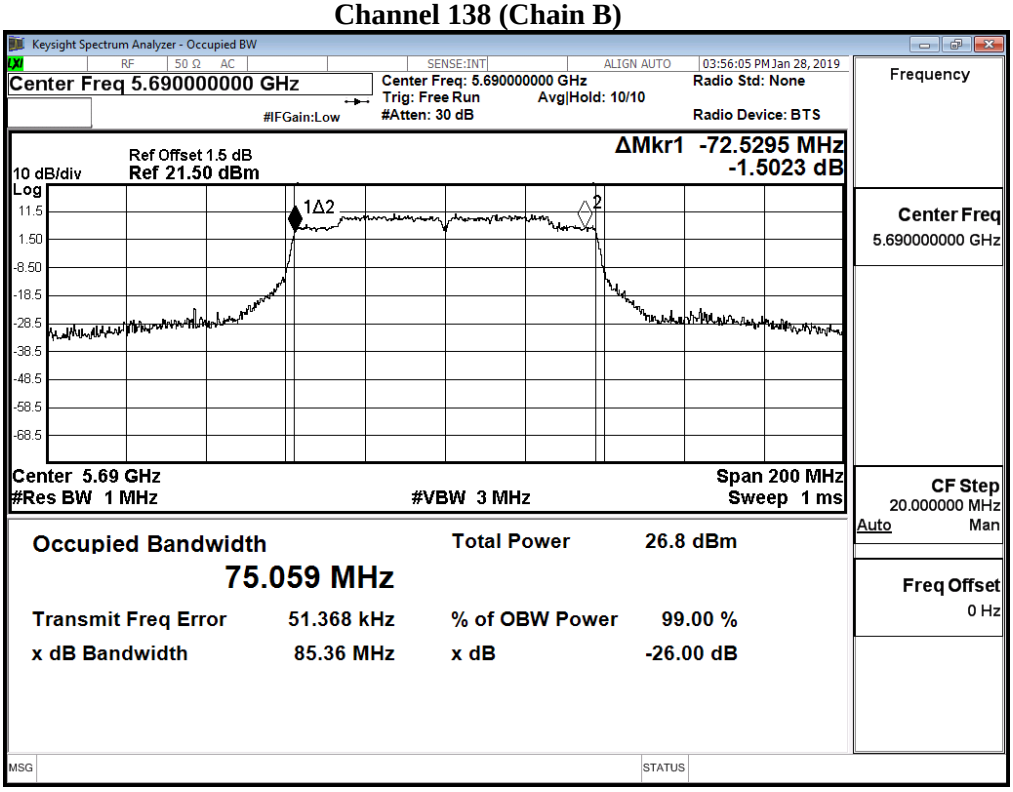

Maximum conducted output power:

Channel 138 (U-NII-2C) (Chain A)

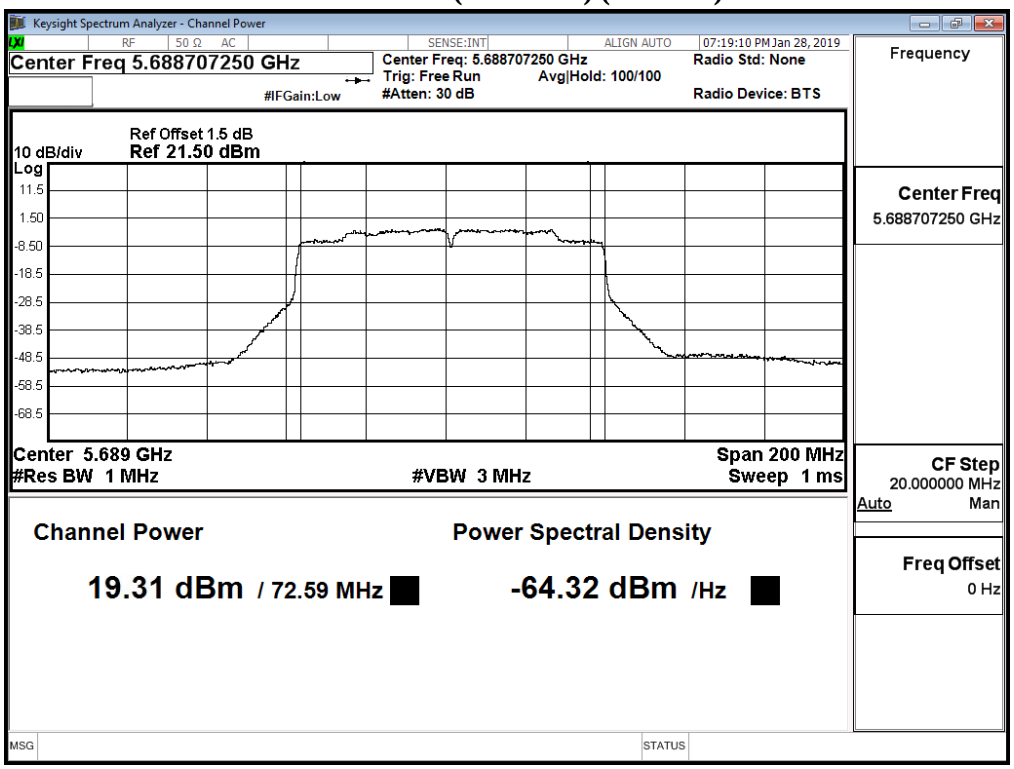

Maximum conducted output power:

Channel 138 (U-NII-2C) (Chain A)

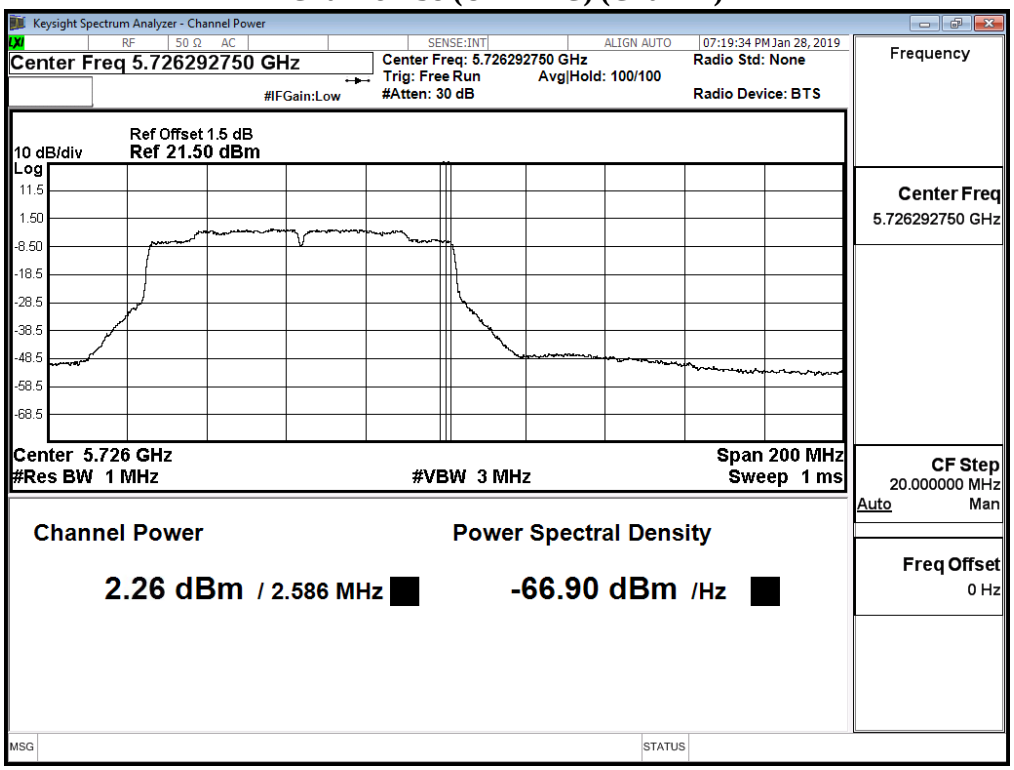

Maximum conducted output power:

Channel 138 (U-NII-3) (Chain B)

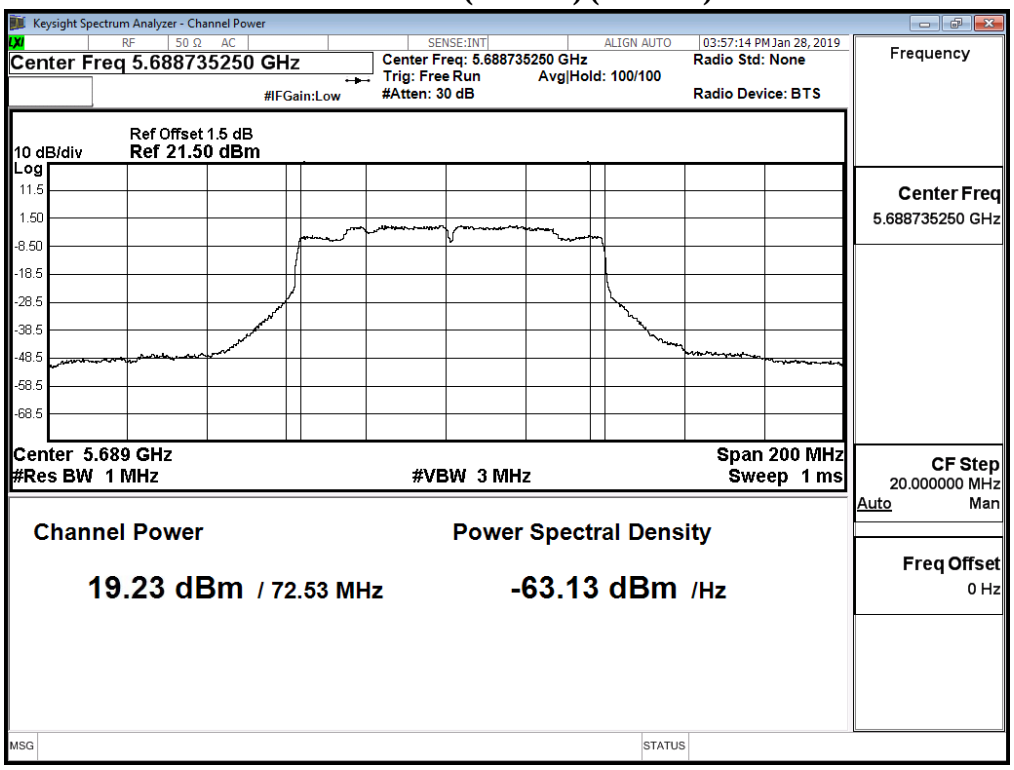

Maximum conducted output power:

Channel 138 (U-NII-3) (Chain B)

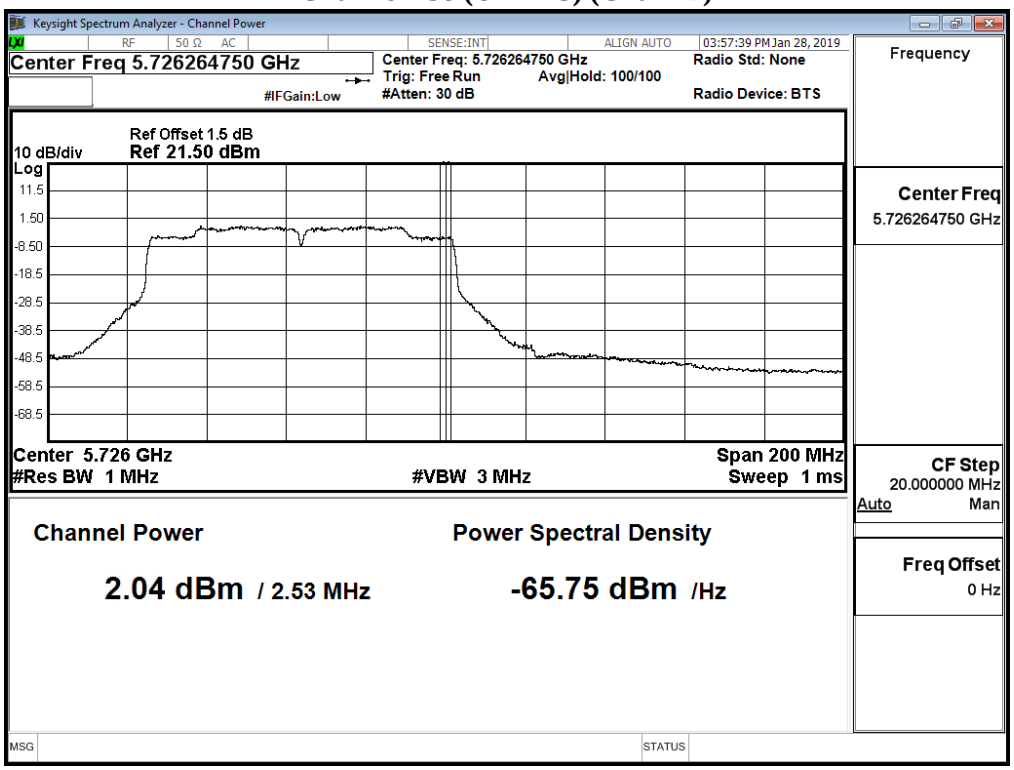

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 3: MIMO: 發射器 802.11ac-160BW
6 dB 頻寬：1MHz　　視頻頻寬：3MHz
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		130	260	390	520	780	1040	1170	1300	1560	1733.3
50 (U-NII-1)	5250	9.43	9.31	9.17	9.00	8.85	8.73	8.57	8.42	8.36	8.28
50 (U-NII-2A)	5250	9.99	9.92	9.80	9.74	9.59	9.43	9.32	9.25	9.18	9.09
114	5570	13.90	13.73	13.65	13.55	13.46	13.36	13.24	13.12	13.05	12.99

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		130	260	390	520	780	1040	1170	1300	1560	1733.3
50 (U-NII-1)	5250	9.81	9.74	9.64	9.49	9.34	9.20	9.04	8.95	8.81	8.66
50 (U-NII-2A)	5250	9.93	9.81	9.75	9.62	9.46	9.34	9.17	9.09	9.00	8.94
114	5570	13.76	13.66	13.49	13.38	13.24	13.18	13.04	12.91	12.85	12.68

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
50 (U-NII-1)	5250	--	9.430	9.810	12.63	24	--
50 (U-NII-2A)	5250	76.490	9.990	9.930	12.97	24	29.84
114	5570	153.100	13.900	13.760	16.84	24	32.85

Note:
1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:

Channel 50 (Chain A)

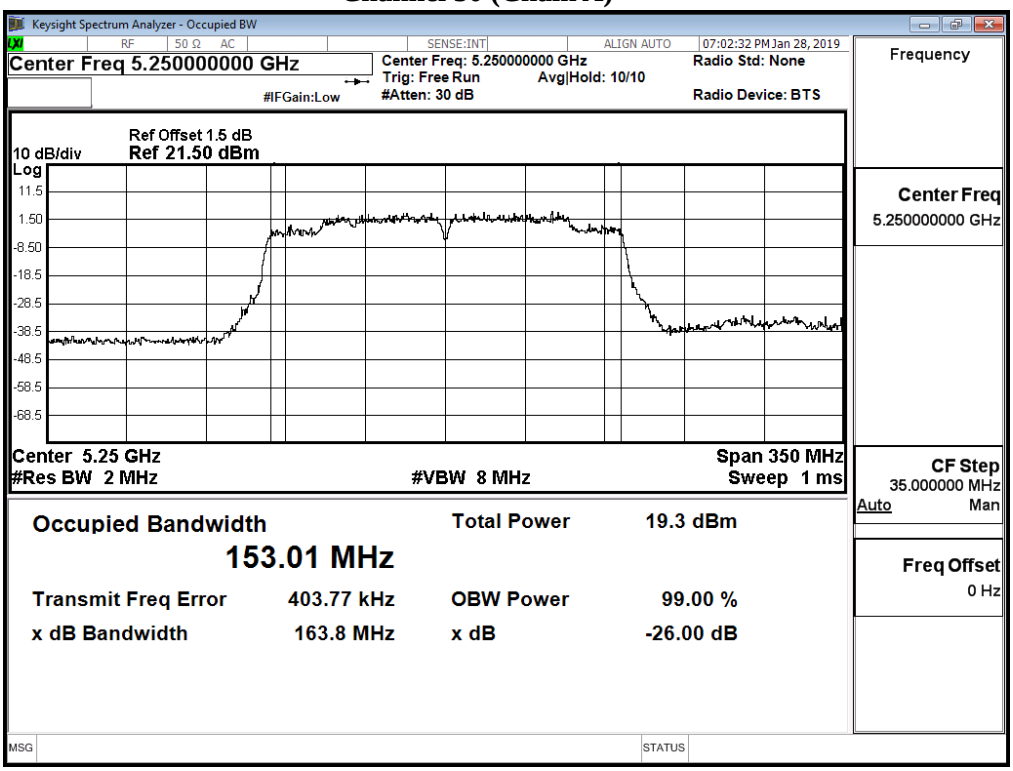

Channel 50 (Chain B)

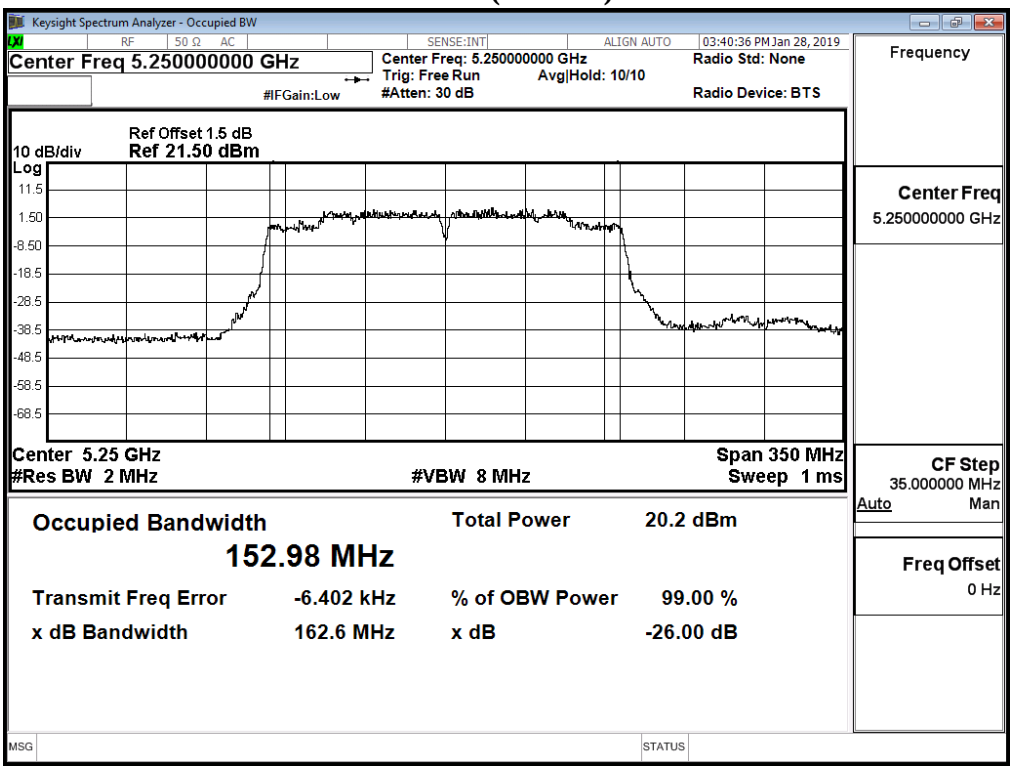

Channel 114 (Chain A)

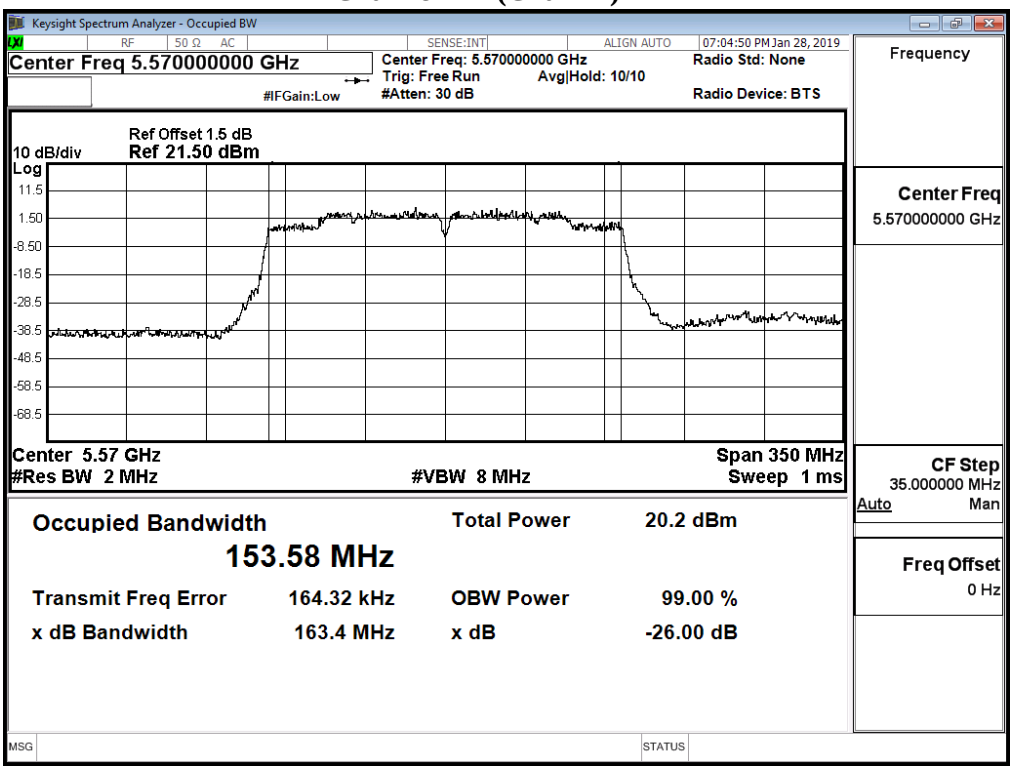

Channel 114 (Chain B)

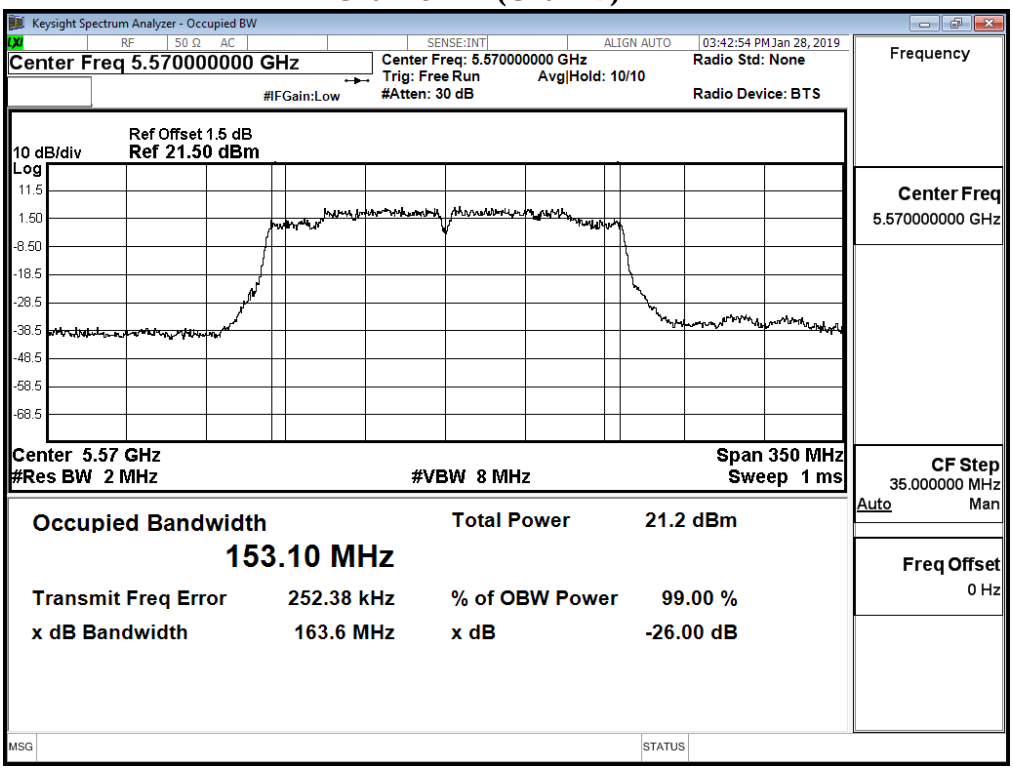

Maximum conducted output power:

Channel 50 (U-NII-1) (Chain A)

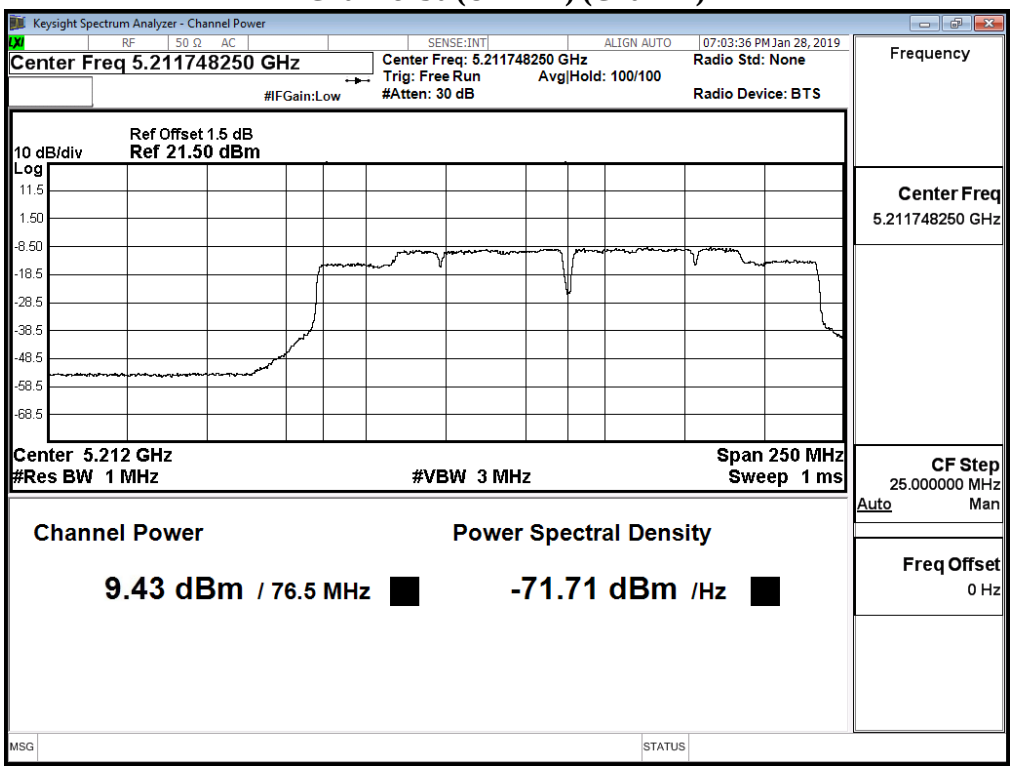

Maximum conducted output power:

Channel 50 (U-NII-2A) (Chain A)

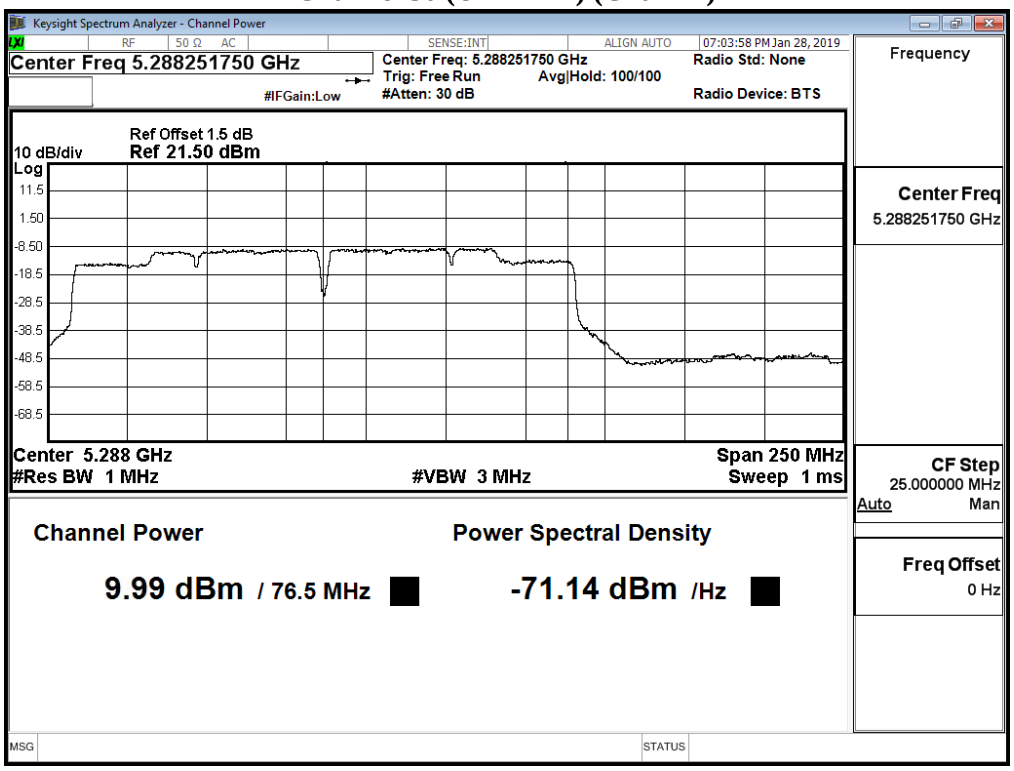

Maximum conducted output power:

Channel 50 (U-NII-1) (Chain B)

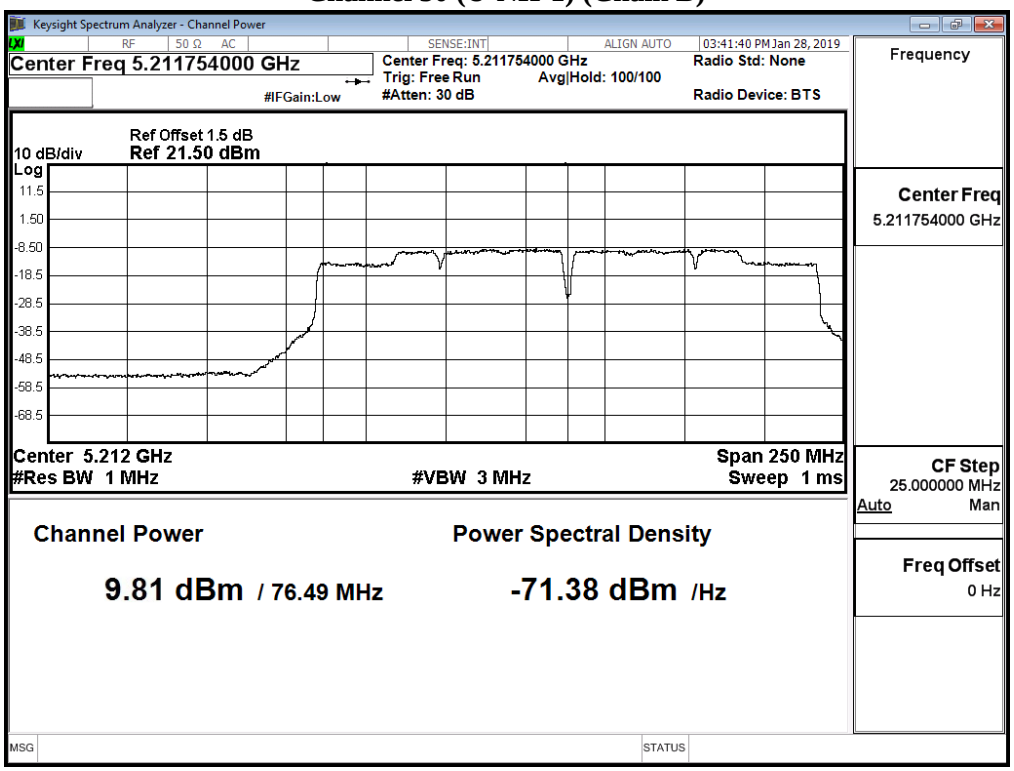

Maximum conducted output power:

Channel 50 (U-NII-2A) (Chain B)

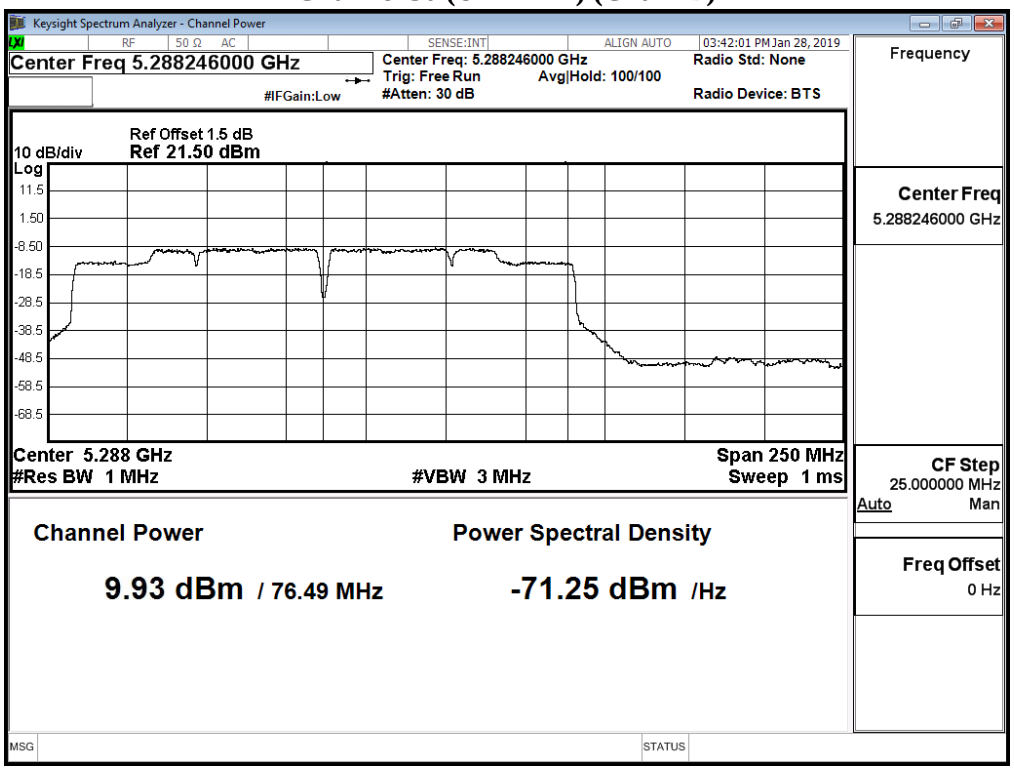

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測 試 項 目 ：峰值發射功率
測 試 頻 道 ：--　　測 試 模 式 ：Mode 1: SISO A: 發射器 802.11ax-20BW
檢 測 器 ：峰值　　環 境 溫 度 ：21 ℃
測 試 日 期 ：108 年 01 月 19 日　　環 境 濕 度 ：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
36	5180	18.25	--	--	--	--	--	--	--	--	--	--	--
44	5220	20.59	20.46	20.37	20.19	20.10	20.01	19.86	19.76	19.62	19.52	19.42	19.31
48	5240	19.31	--	--	--	--	--	--	--	--	--	--	--
52	5260	19.63	--	--	--	--	--	--	--	--	--	--	--
60	5300	20.52	20.45	20.32	20.21	20.06	19.89	19.72	19.55	19.49	19.32	19.23	19.05
64	5320	17.49	--	--	--	--	--	--	--	--	--	--	--
100	5500	18.22	--	--	--	--	--	--	--	--	--	--	--
116	5580	20.68	20.53	20.37	20.20	20.09	19.91	19.81	19.65	19.50	19.43	19.33	19.23
140	5700	19.47	--	--	--	--	--	--	--	--	--	--	--
144(U-NII-2C)	5720	19.59	19.53	19.42	19.30	19.21	19.11	18.98	18.82	18.66	18.51	18.36	18.23
144(U-NII-3)	5720	14.62	14.54	14.45	14.27	14.15	14.06	13.93	13.78	13.71	13.55	13.48	13.35
149	5745	20.32	--	--	--	--	--	--	--	--	--	--	--
157	5785	20.75	20.58	20.50	20.32	20.26	20.13	20.05	19.99	19.88	19.73	19.63	19.46
165	5825	20.3	--	--	--	--	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
36	5180	--	18.25	24	--
44	5220	--	20.59	24	--
48	5240	--	19.31	24	--
52	5260	19.103	19.63	24	23.81
60	5300	19.163	20.52	24	23.82
64	5320	19.127	17.49	24	23.82
100	5500	19.141	18.22	24	23.82
116	5580	19.122	20.68	24	23.82
140	5700	19.096	19.47	24	23.81
144(U-NII-2C)	5720	14.575	19.59	24	22.64
144(U-NII-3)	5720	--	14.62	30	--
149	5745	--	20.32	30	--
157	5785	--	20.75	30	--
165	5825	--	20.3	30	--

99% Occupied Bandwidth:

Channel 52

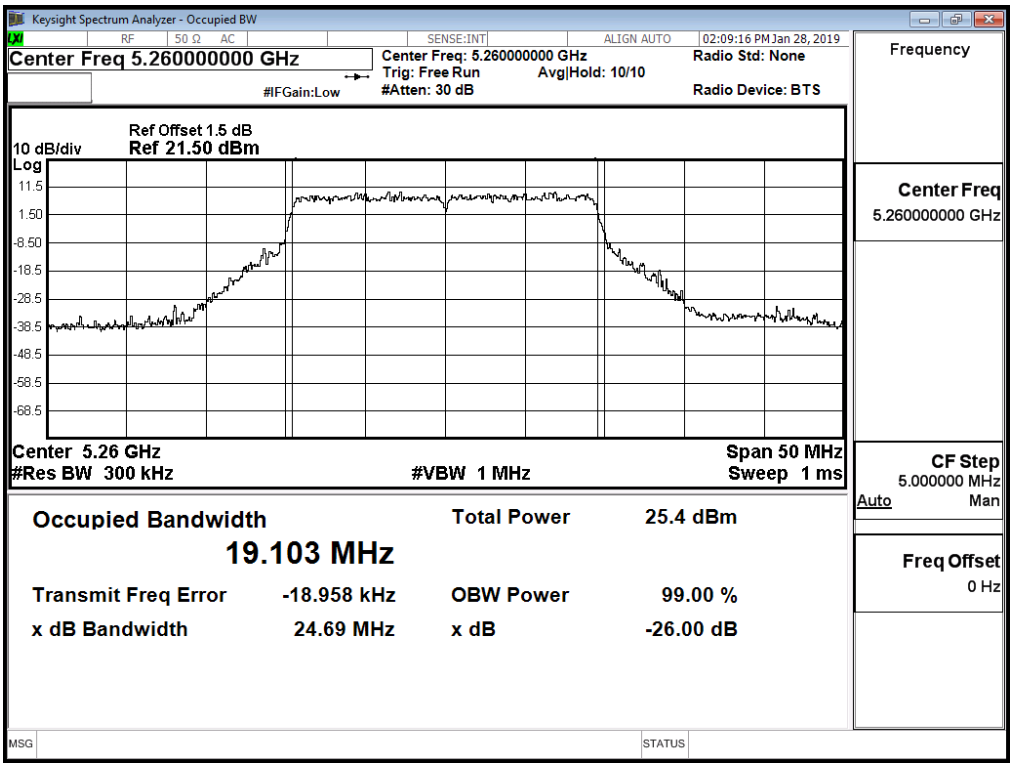

Channel 60

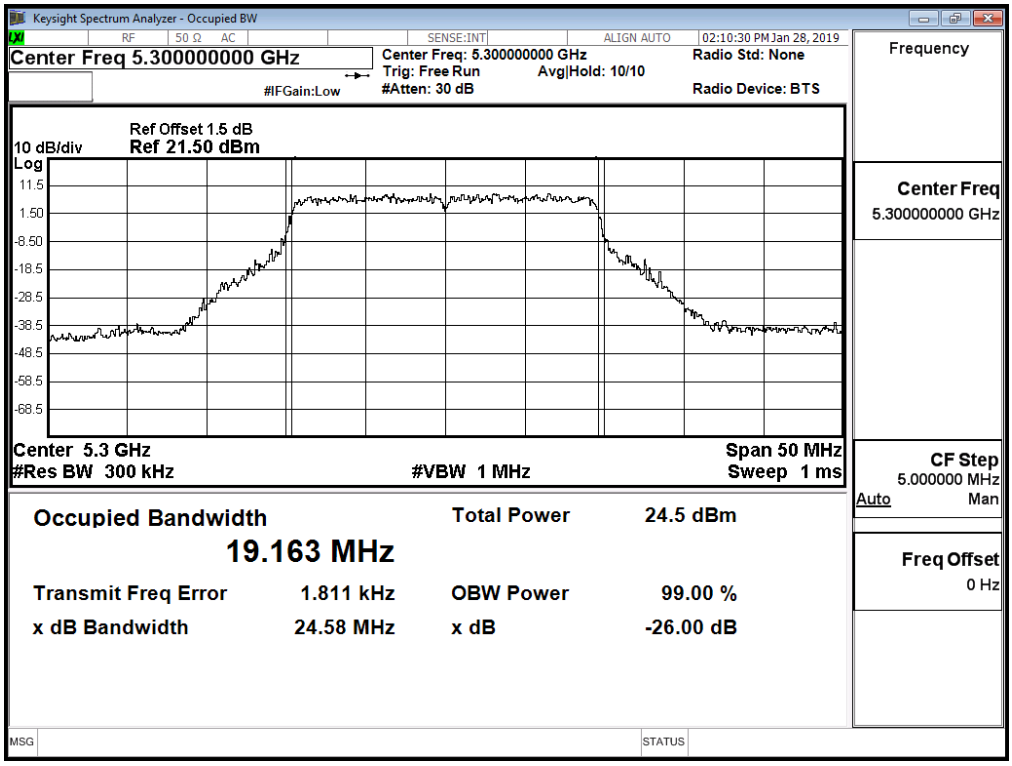

Channel 64

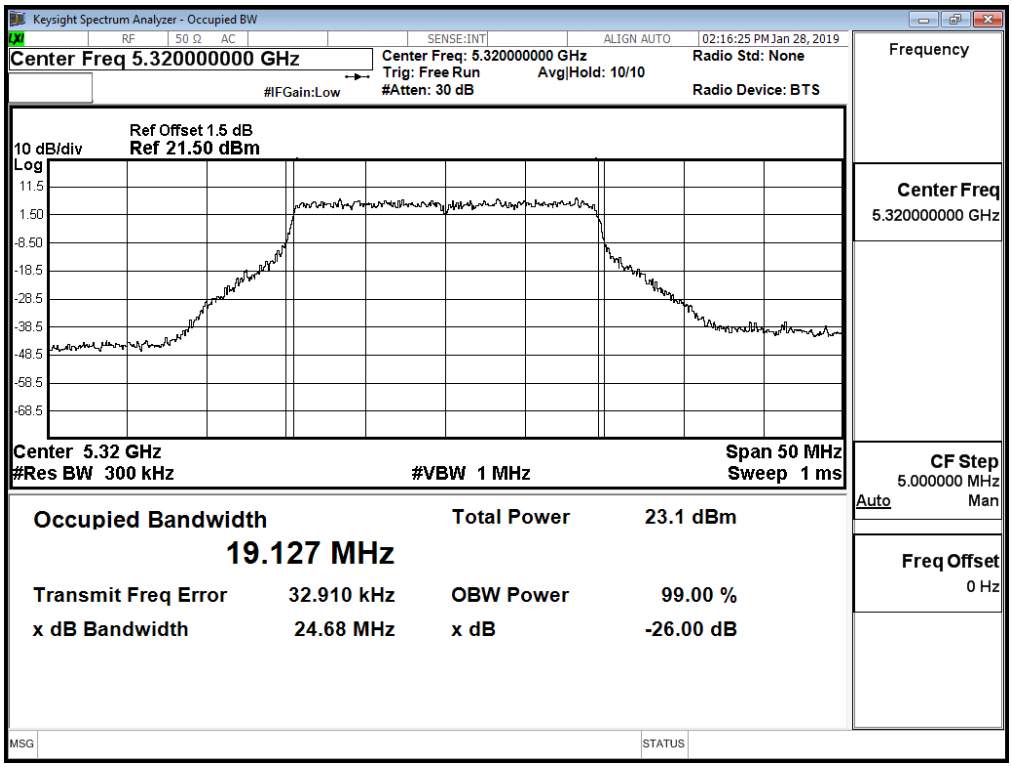

Channel 100

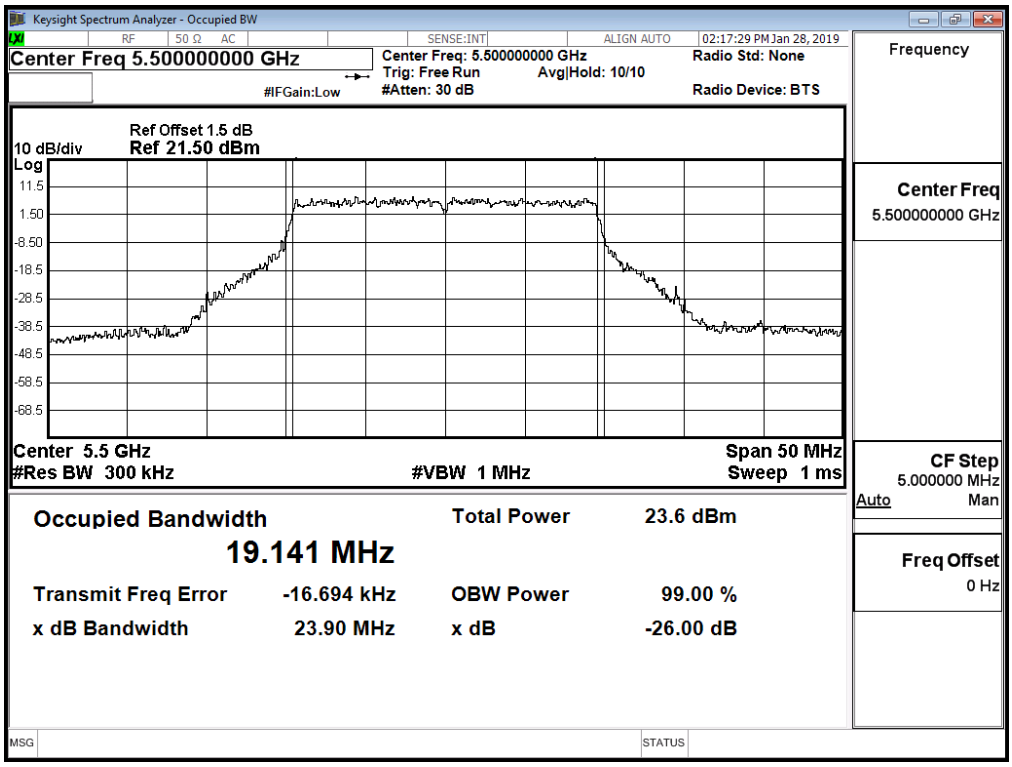

Channel 116

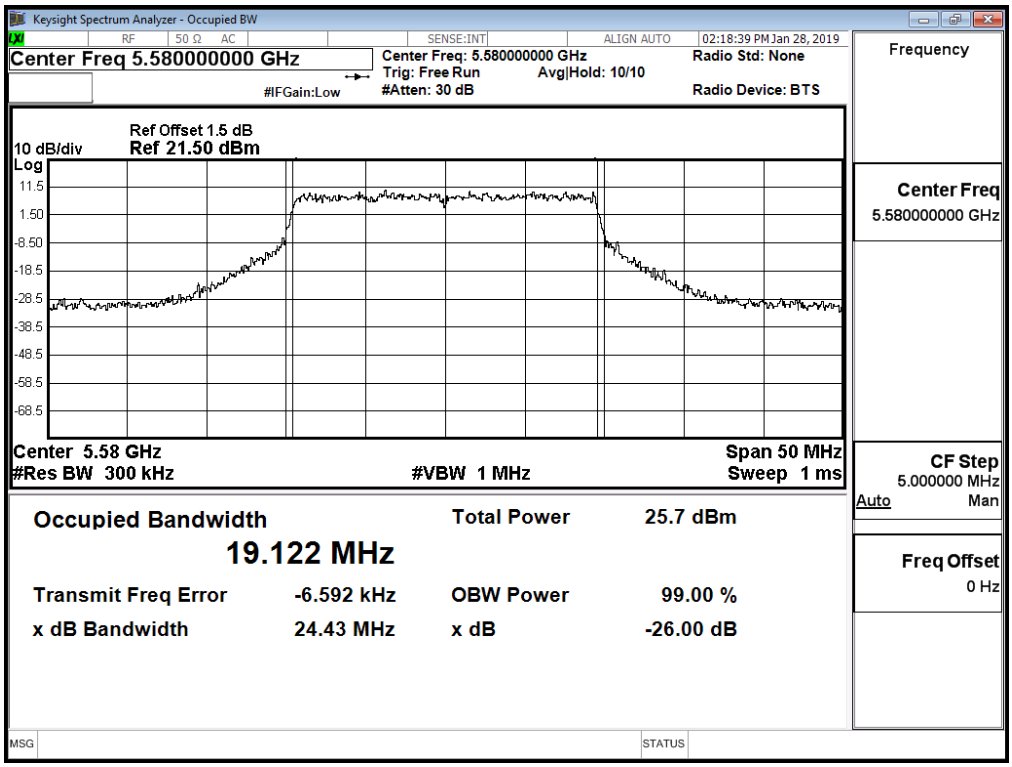

Channel 140

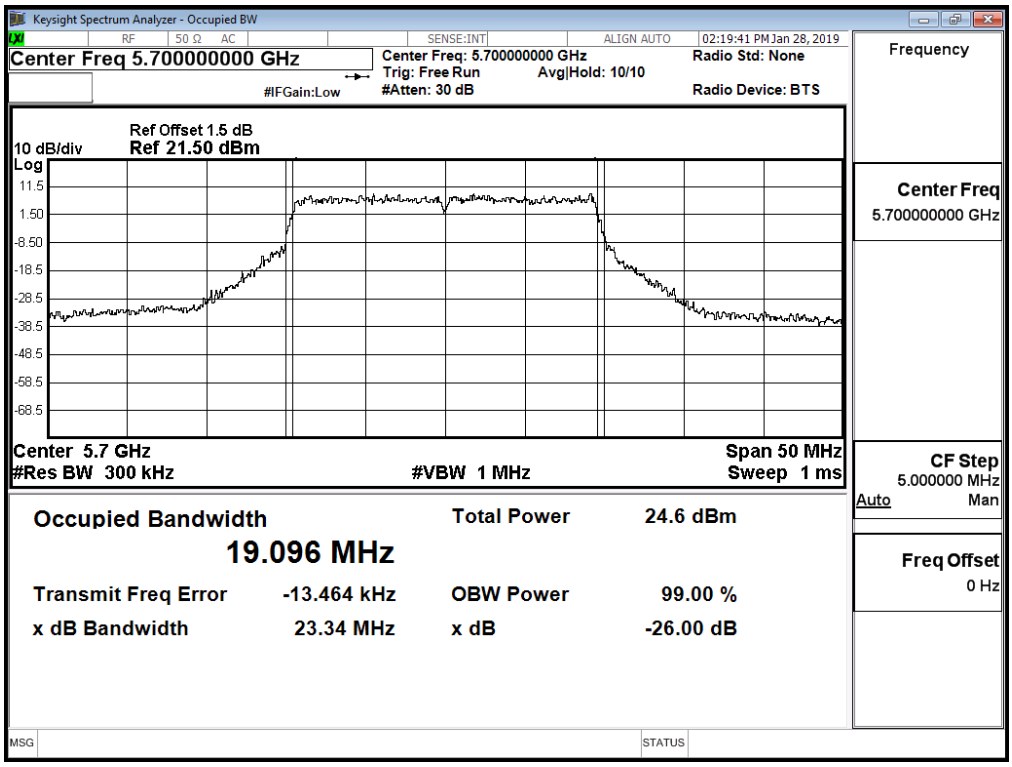

Channel 144

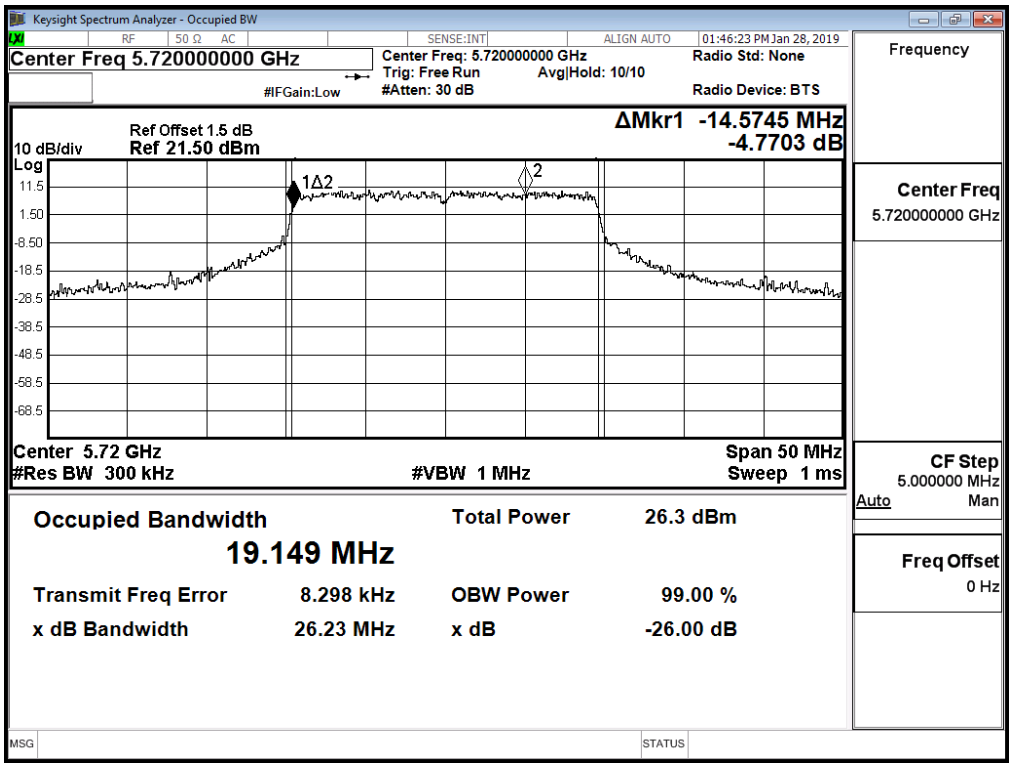
Keysight Spectrum Analyzer - Occupied BW
RF 50 Ω AC
SENSE:INT
ALIGN AUTO
01:46:23 PM Jan 28, 2019
Center Freq 5.720000000 GHz
#IFGain:Low
Center Freq: 5.720000000 GHz
Trig: Free Run
#Atten: 30 dB
Avg|Hold: 10/10
Radio Std: None
Radio Device: BTS
Frequency
Ref Offset 1.5 dB
10 dB/div
Ref 21.50 dBm
Log
ΔMkr1 -14.5745 MHz
-4.7703 dB
11.5
1.50
-8.50
-18.5
-28.5
-38.5
-48.5
-58.5
-68.5
1Δ2
2
Center Freq
5.720000000 GHz
Center 5.72 GHz
#Res BW 300 kHz
#VBW 1 MHz
Span 50 MHz
Sweep 1 ms
CF Step
5.000000 MHz
Auto
Man
Occupied Bandwidth
19.149 MHz
Total Power 26.3 dBm
Freq Offset
0 Hz
Transmit Freq Error 8.298 kHz
OBW Power 99.00 %
x dB Bandwidth 26.23 MHz
x dB -26.00 dB
MSG
STATUS

Maximum conducted output power:

Channel 144 (U-NII-2C)

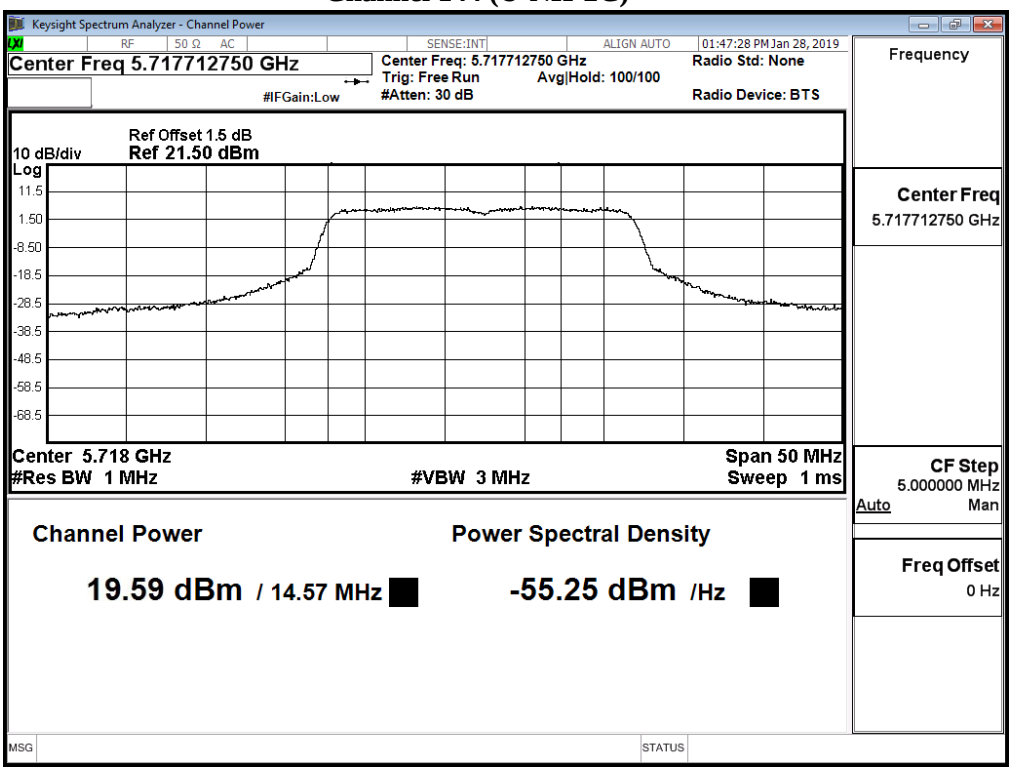

Maximum conducted output power:

Channel 144 (U-NII-3)

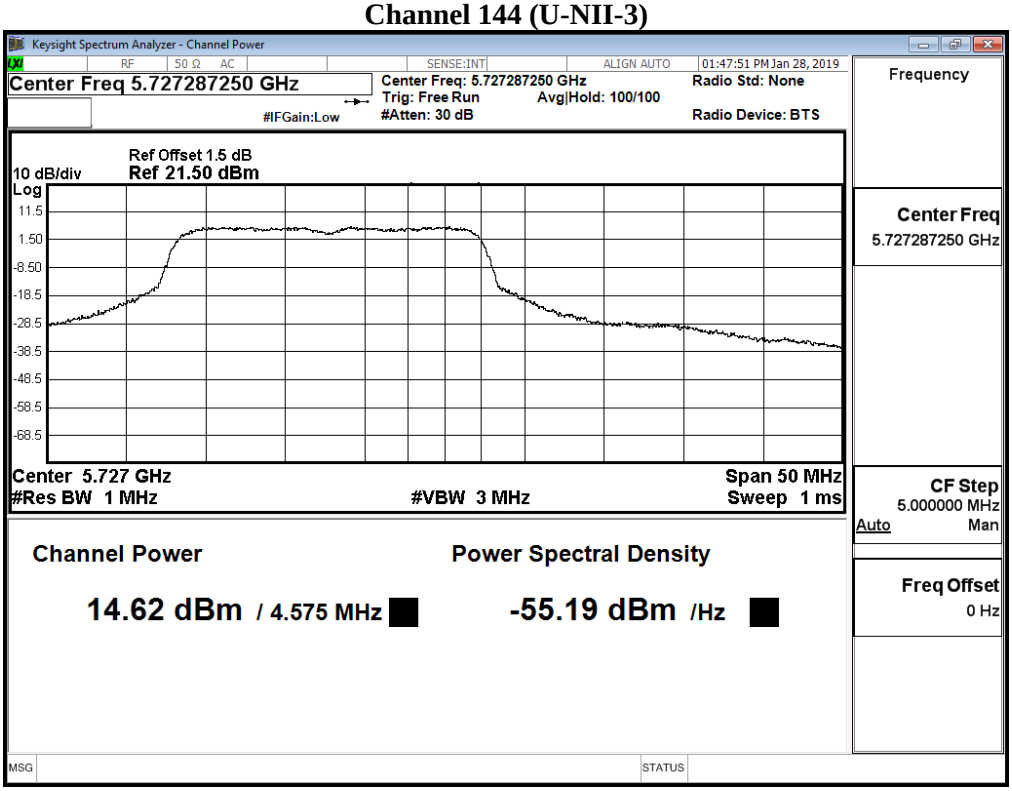

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 1: SISO A: 發射器 802.11ax-40BW
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
38	5190	17.66	--	--	--	--	--	--	--	--	--	--	--
46	5230	18.86	18.74	18.67	18.53	18.38	18.23	18.16	18.05	17.96	17.89	17.83	17.70
54	5270	18.69	--	--	--	--	--	--	--	--	--	--	--
62	5310	15.17	15.08	14.93	14.81	14.74	14.61	14.46	14.35	14.20	14.04	13.92	13.82
102	5510	18.13	--	--	--	--	--	--	--	--	--	--	--
110	5550	19.78	19.69	19.61	19.55	19.43	19.33	19.18	19.05	18.92	18.79	18.64	18.49
134	5670	19.44	--	--	--	--	--	--	--	--	--	--	--
142(U-NII-2C)	5710	20.22	20.12	20.06	19.89	19.79	19.68	19.61	19.48	19.34	19.17	19.05	18.87
142(U-NII-3)	5710	10.39	10.28	10.14	10.06	9.90	9.79	9.65	9.58	9.50	9.35	9.29	9.13
151	5755	20.69	--	--	--	--	--	--	--	--	--	--	--
159	5795	20.43	20.28	20.16	20.01	19.94	19.87	19.81	19.63	19.50	19.35	19.29	19.11

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
38	5190	--	17.66	24	--
46	5230	--	18.86	24	--
54	5270	37.867	18.69	24	26.78
62	5310	37.883	15.17	24	26.78
102	5510	37.864	18.13	24	26.78
110	5550	37.946	19.78	24	26.79
134	5670	37.918	19.44	24	26.79
142(U-NII-2C)	5710	34.064	20.22	24	26.32
142(U-NII-3)	5710	--	10.39	30	--
151	5755	--	20.69	30	--
159	5795	--	20.43	30	--

99% Occupied Bandwidth:

Channel 54

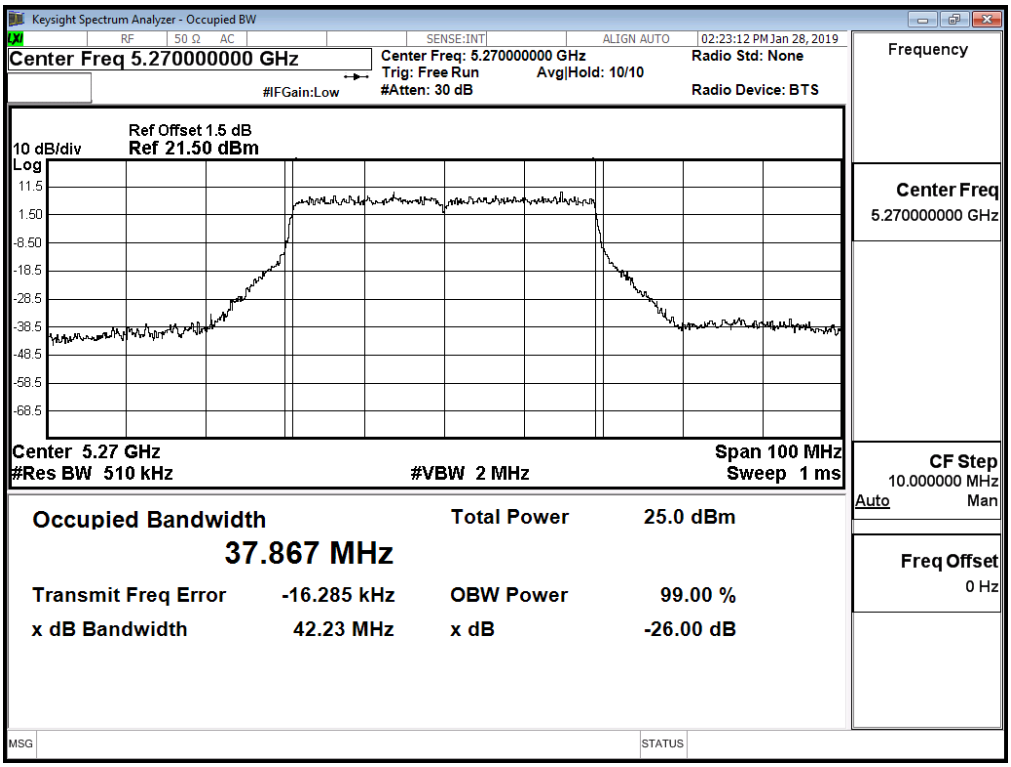

Channel 62

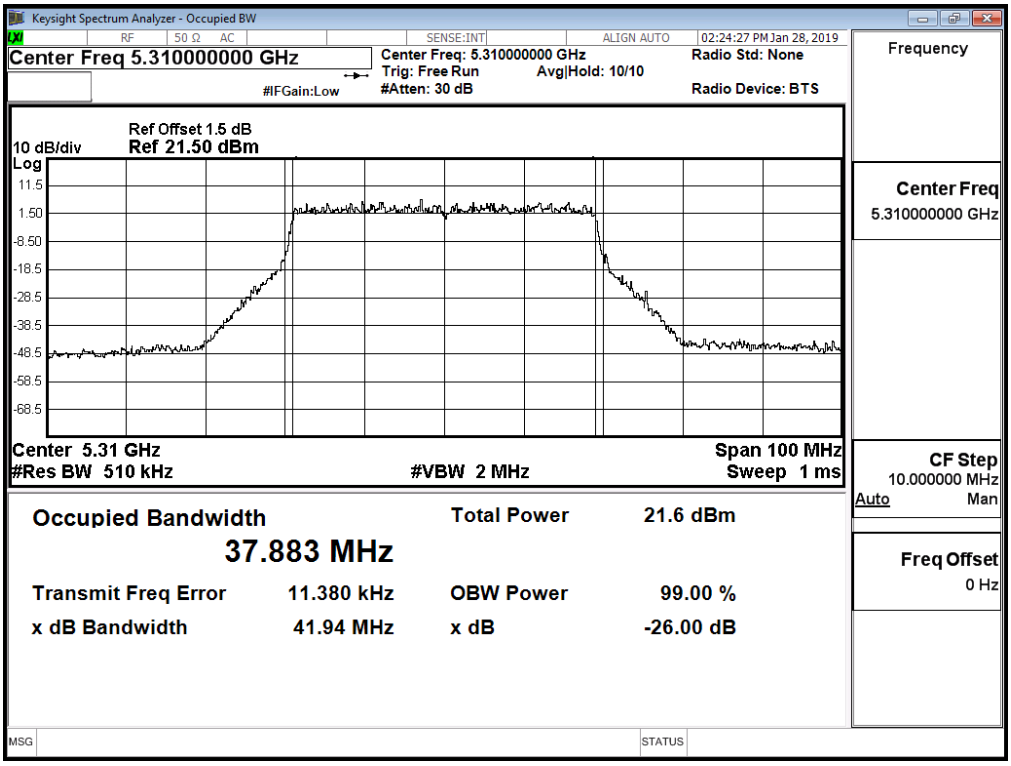

Channel 102

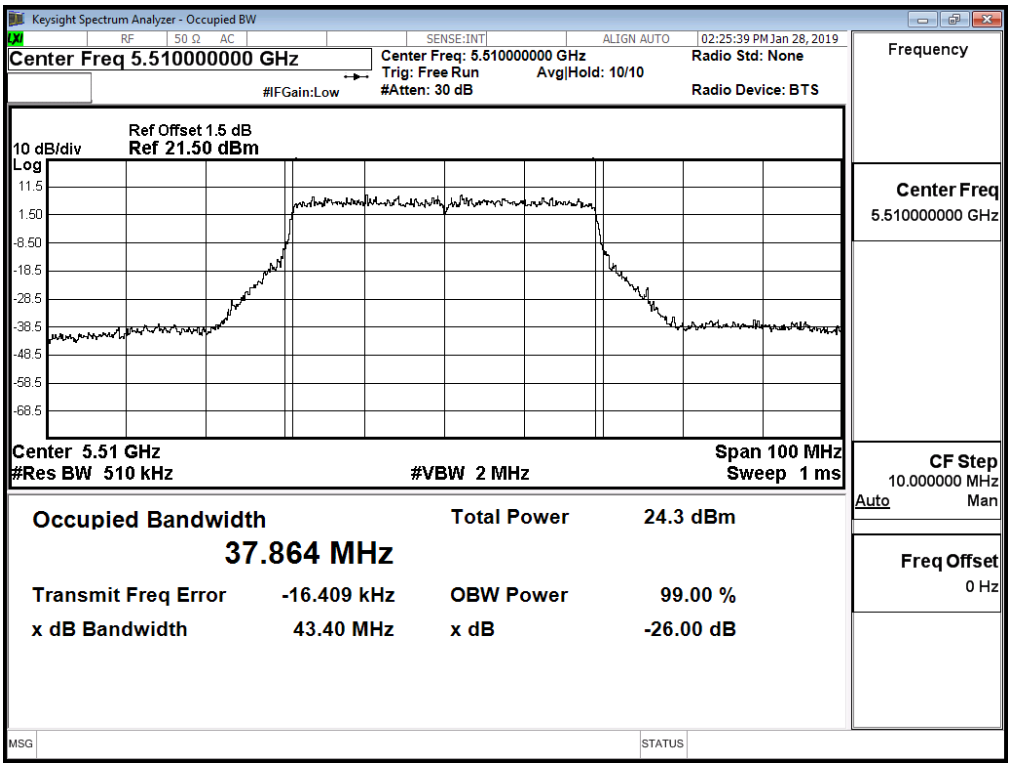

Channel 110

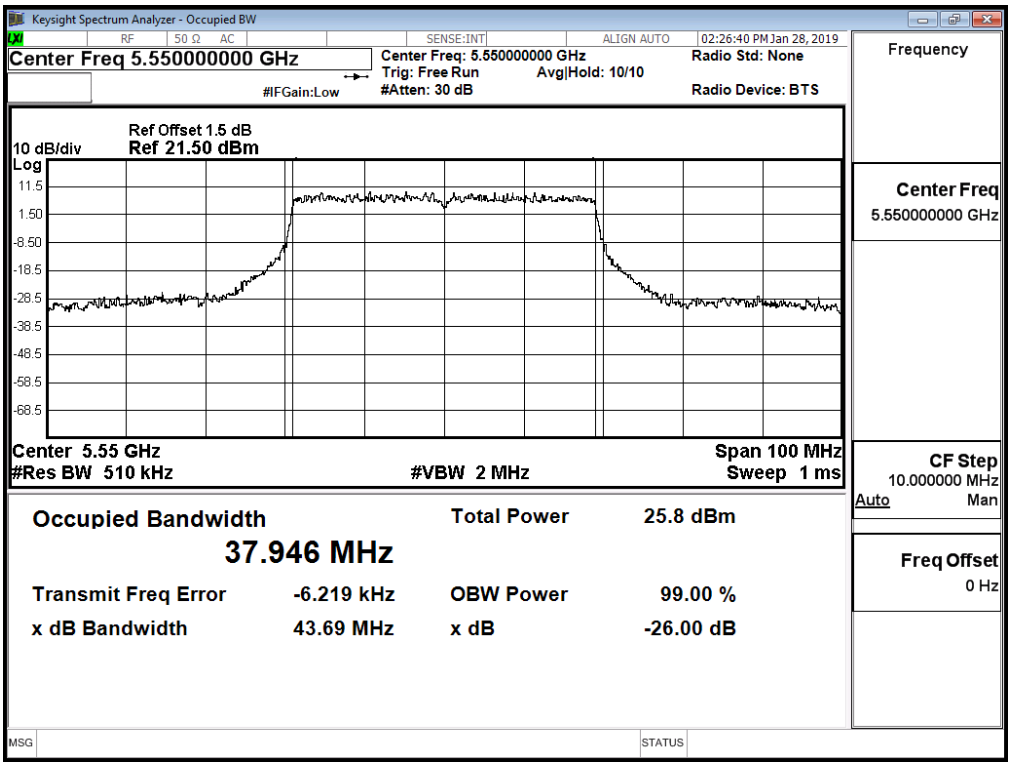

Channel 134

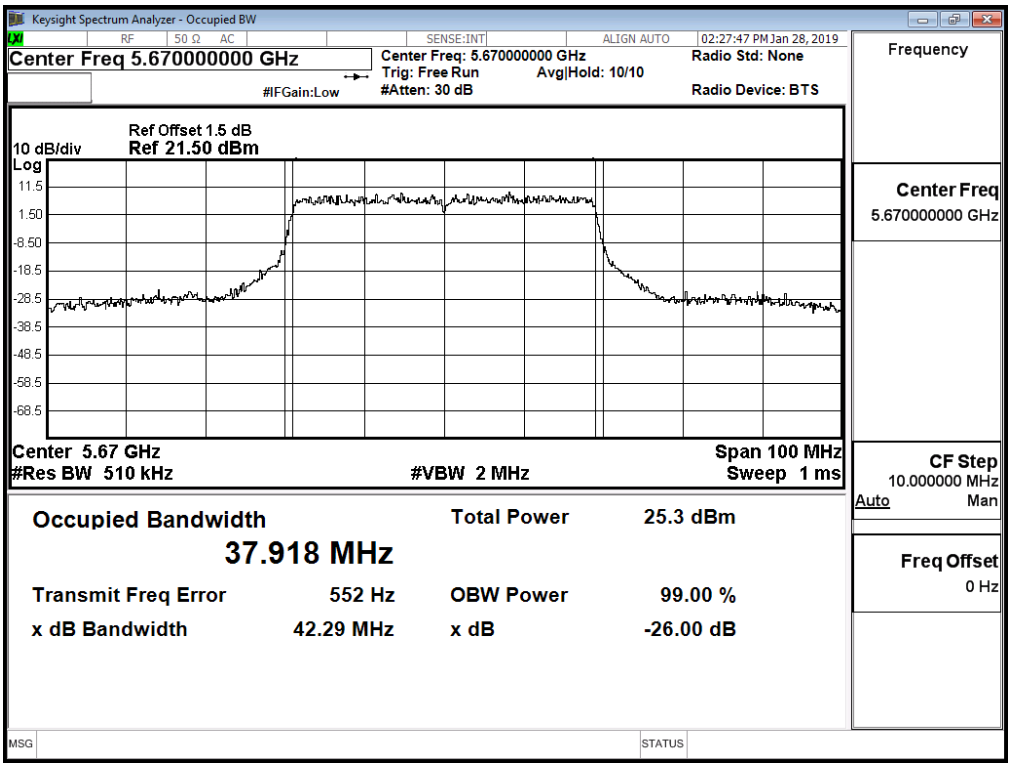

Channel 142

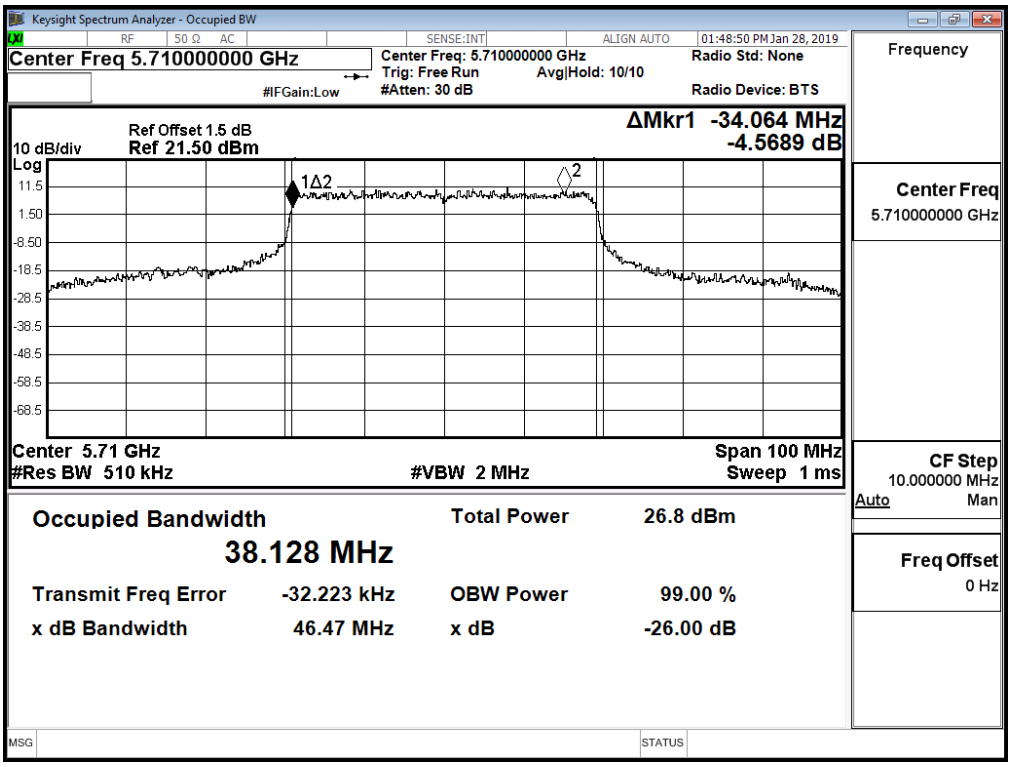

Maximum conducted output power:

Channel 142 (U-NII-2C)

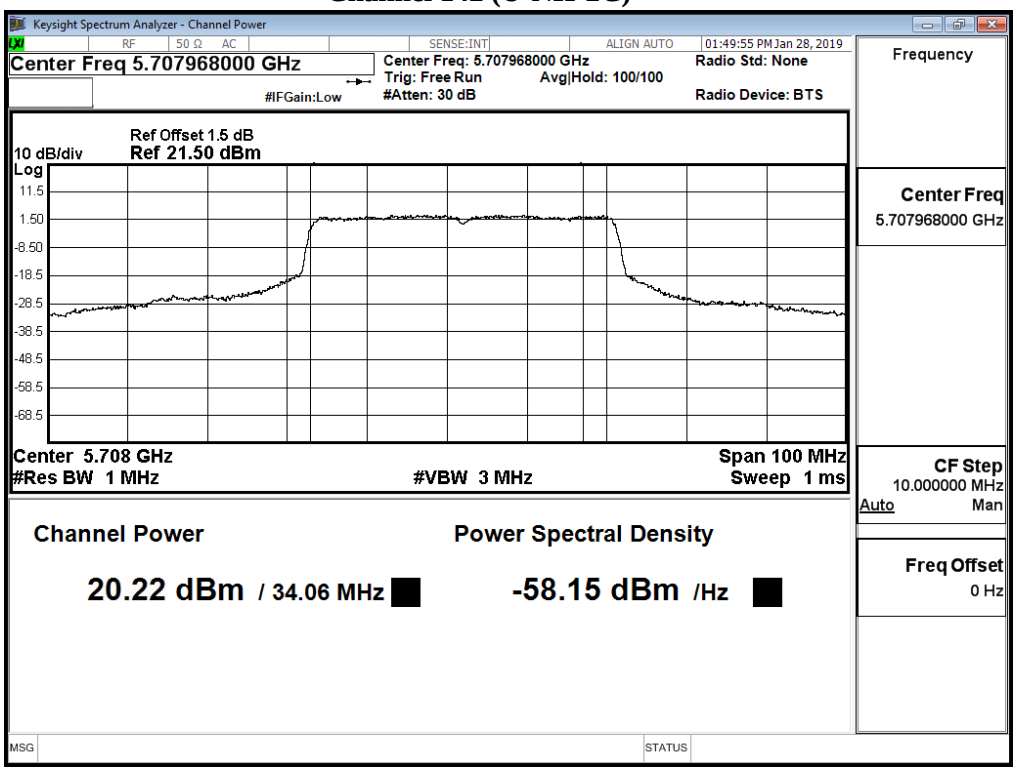

Maximum conducted output power:

Channel 142 (U-NII-3)

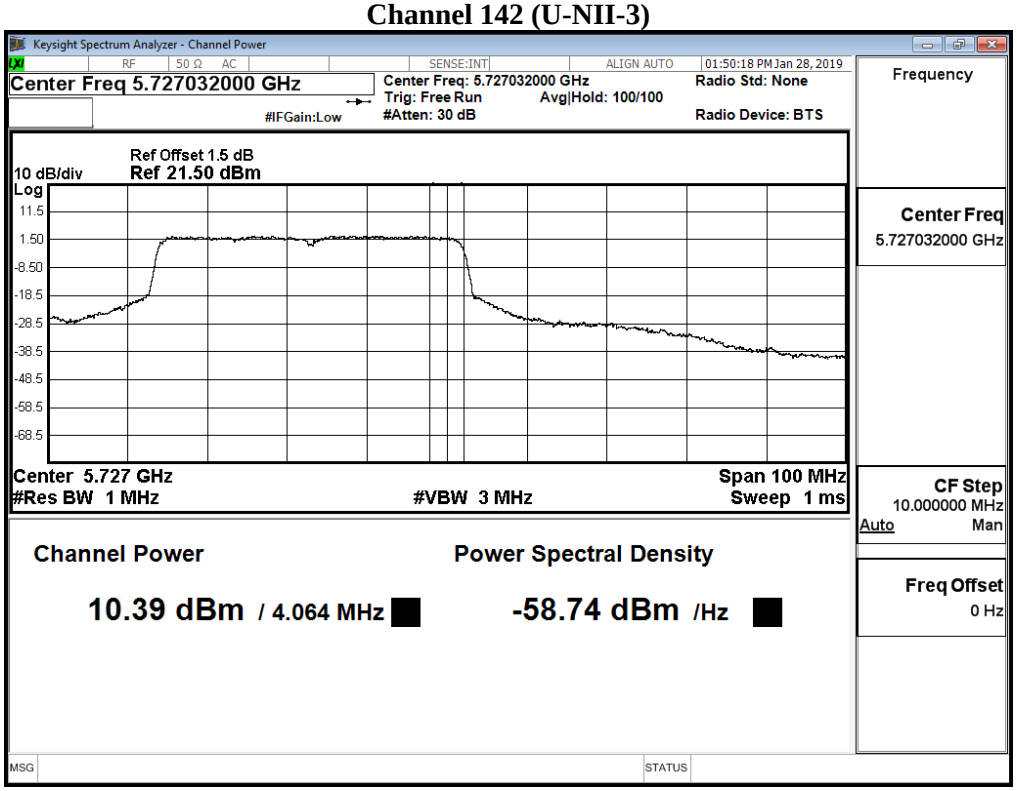

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 1: SISO A: 發射器 802.11ax-80BW
6 dB 頻寬：1MHz　　視頻頻寬：3MHz
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
42	5210	17.63	17.51	17.36	17.23	17.09	16.99	16.88	16.70	16.55	16.42	16.25	16.18
58	5290	16.96	16.82	16.73	16.62	16.48	16.41	16.27	16.12	15.96	15.85	15.69	15.54
106	5530	17.72	--	--	--	--	--	--	--	--	--	--	--
122	5610	19.16	19.08	18.96	18.86	18.69	18.56	18.50	18.35	18.23	18.17	18.02	17.85
138 (U-NII-2C)	5690	20.48	--	--	--	--	--	--	--	--	--	--	--
138 (U-NII-3)	5690	4.9	--	--	--	--	--	--	--	--	--	--	--
155	5775	18.97	18.80	18.69	18.60	18.49	18.43	18.31	18.24	18.18	18.12	18.06	18.00

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
42	5210	--	17.63	24	--
58	5290	76.736	16.96	24	29.85
106	5530	76.850	17.72	24	29.86
122	5610	76.759	19.16	24	29.85
138 (U-NII-2C)	5690	73.576	20.48	24	29.67
138 (U-NII-3)	5690	3.575	4.90	30	16.53
155	5775	--	18.97	30	--

99% Occupied Bandwidth:

Channel 58

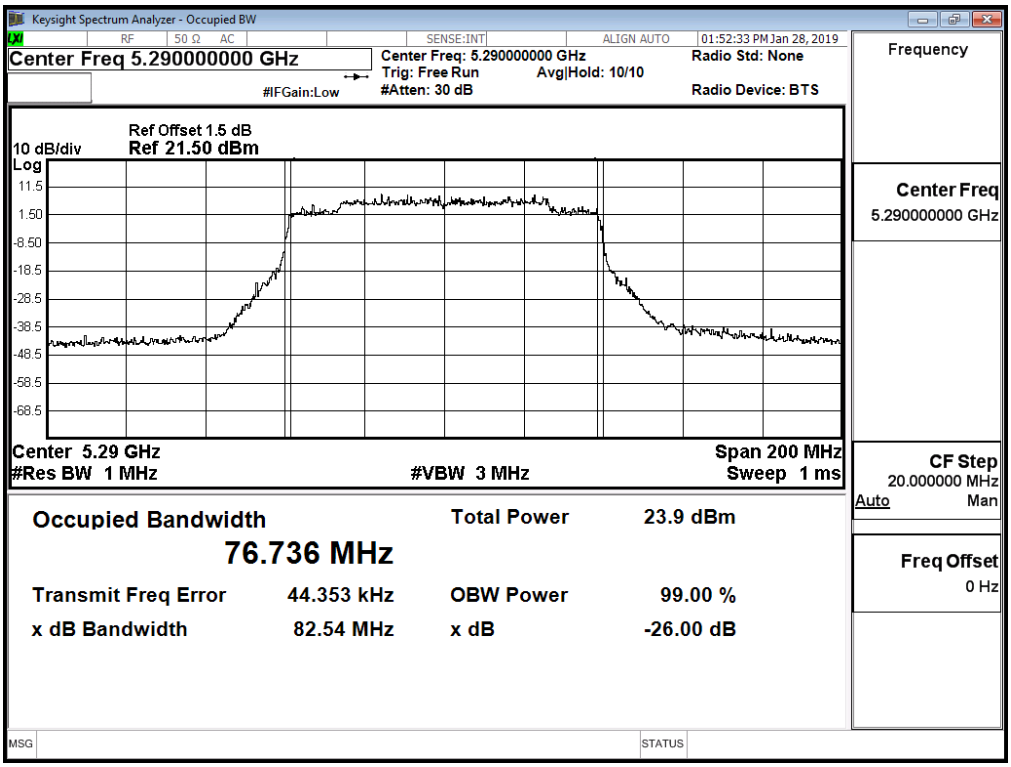

Channel 106

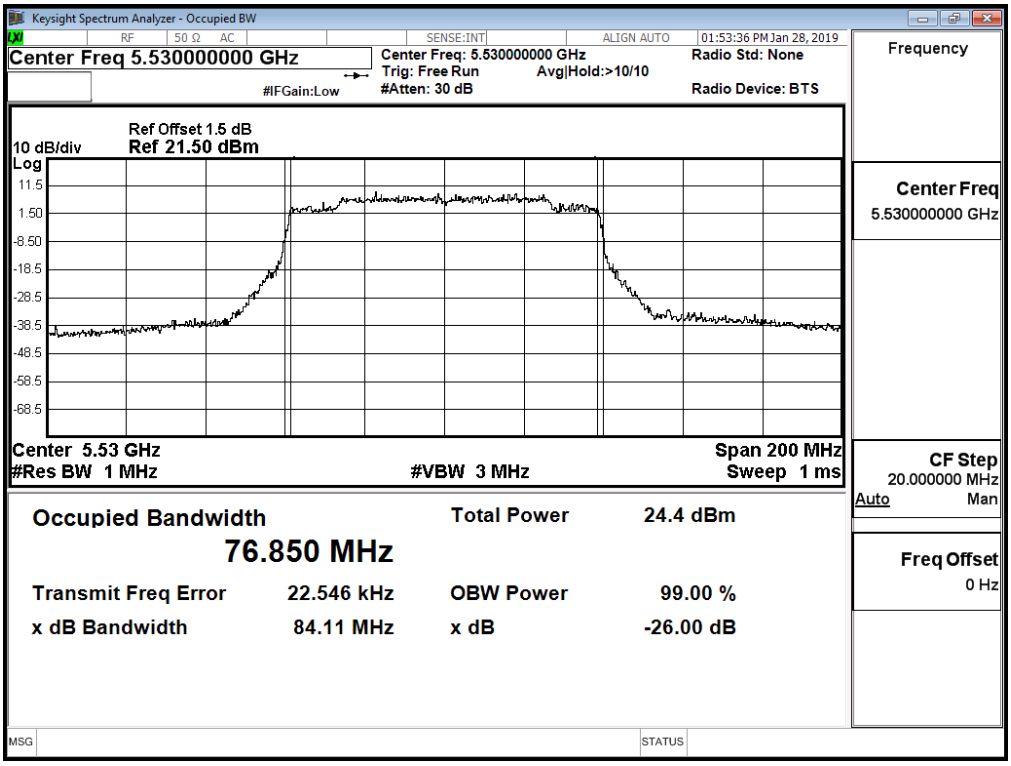

Channel 122

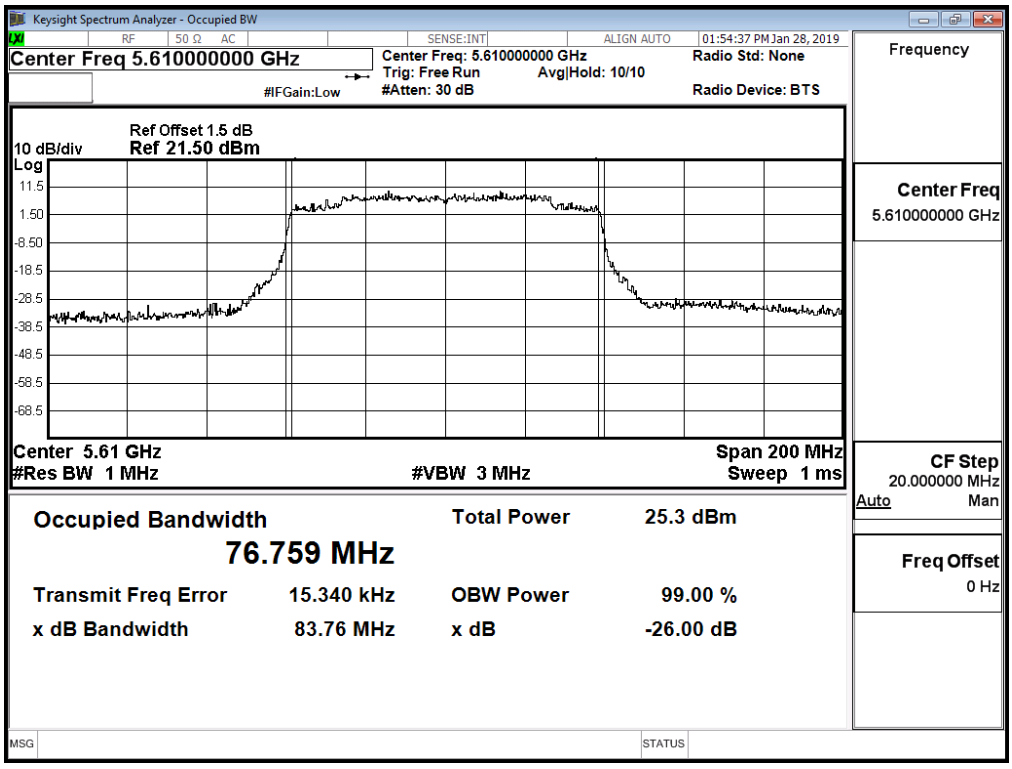

Channel 138

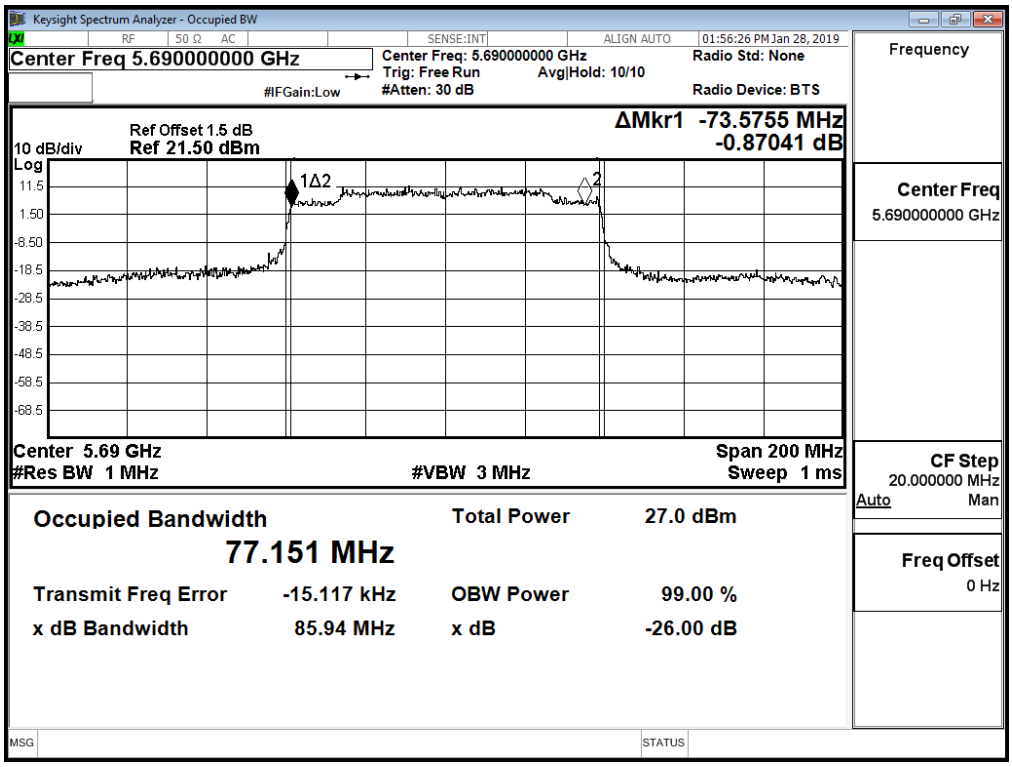

Maximum conducted output power:

Channel 138 (U-NII-2C)

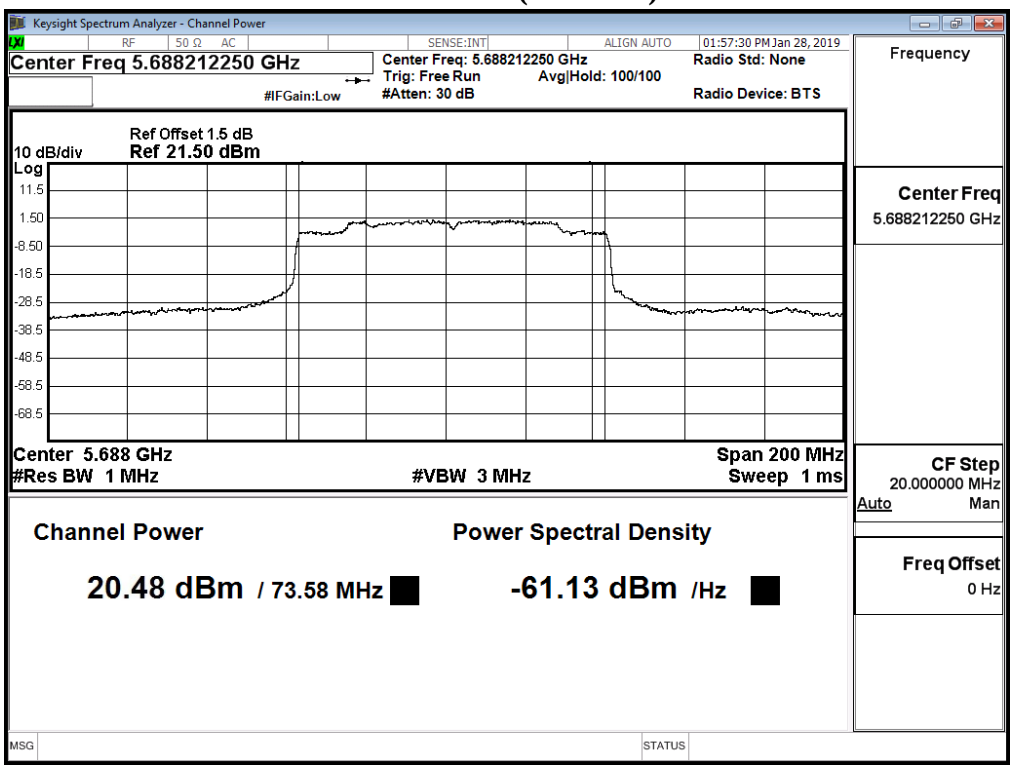

Maximum conducted output power:

Channel 138 (U-NII-3)

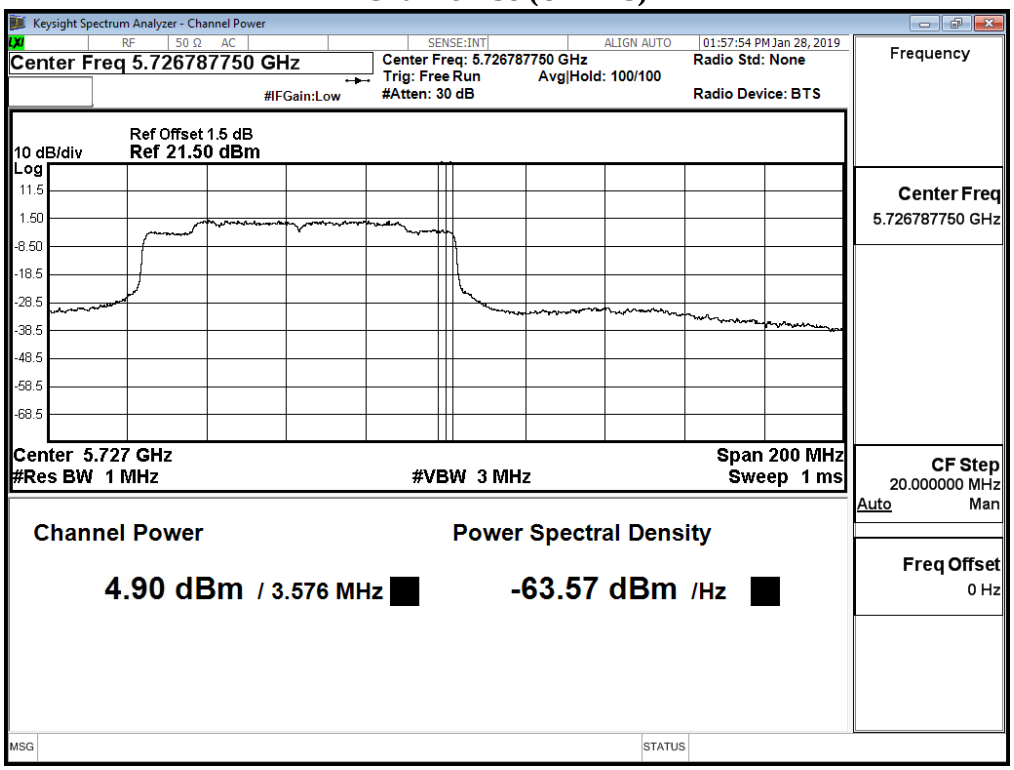

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 1: SISO A: 發射器 802.11ax-160BW
6 dB 頻寬：1MHz　　視頻頻寬：3MHz
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
50 (U-NII-1)	5250	10.43	10.27	10.21	10.08	9.92	9.85	9.67	9.52	9.45	9.38	9.29	9.11
50 (U-NII-2A)	5250	11.1	10.93	10.86	10.79	10.62	10.54	10.39	10.22	10.04	9.94	9.88	9.82
114	5570	14.86	14.78	14.65	14.52	14.41	14.30	14.20	14.13	14.05	13.87	13.78	13.60

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
50 (U-NII-1)	5250	--	10.43	24	--
50 (U-NII-2A)	5250	76.605	11.10	24	29.84
114	5570	153.510	14.86	24	32.86

99% Occupied Bandwidth:

Channel 50

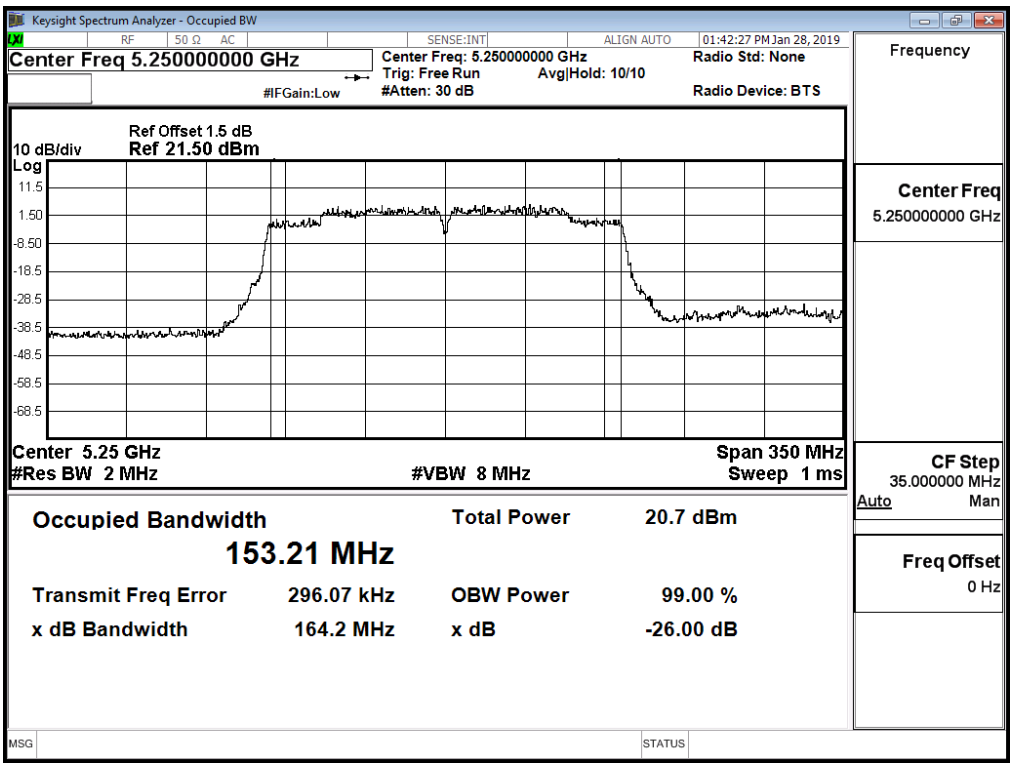

Channel 114

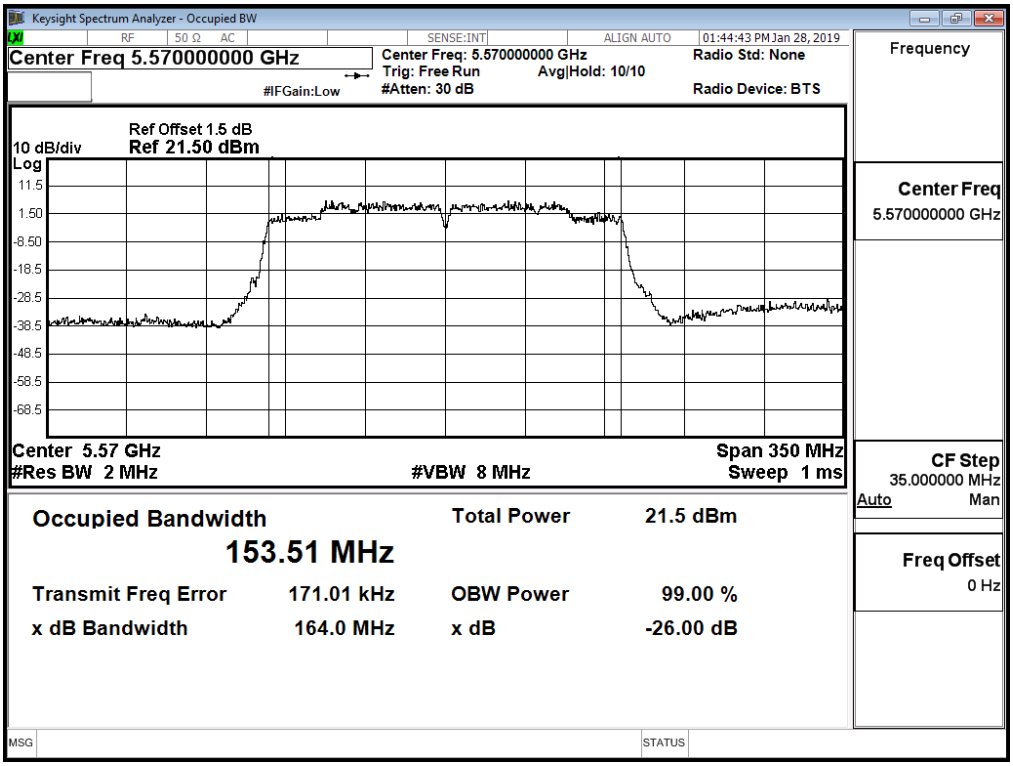

Maximum conducted output power:

Channel 50 (U-NII-1)

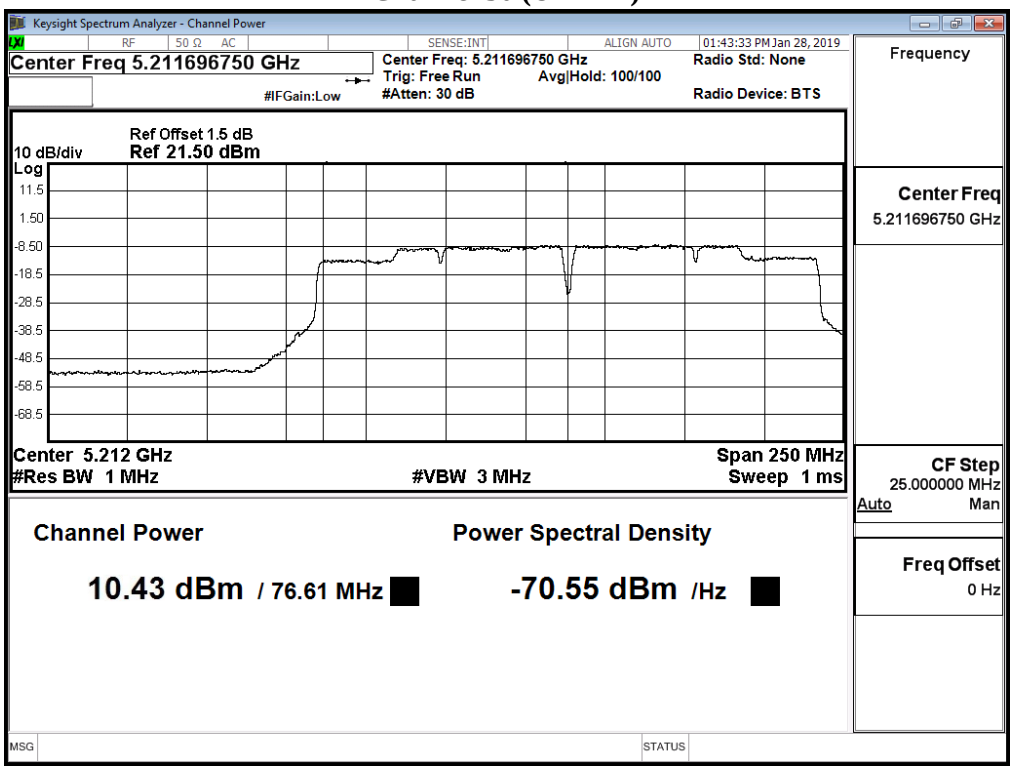

Maximum conducted output power:

Channel 50 (U-NII-2A)

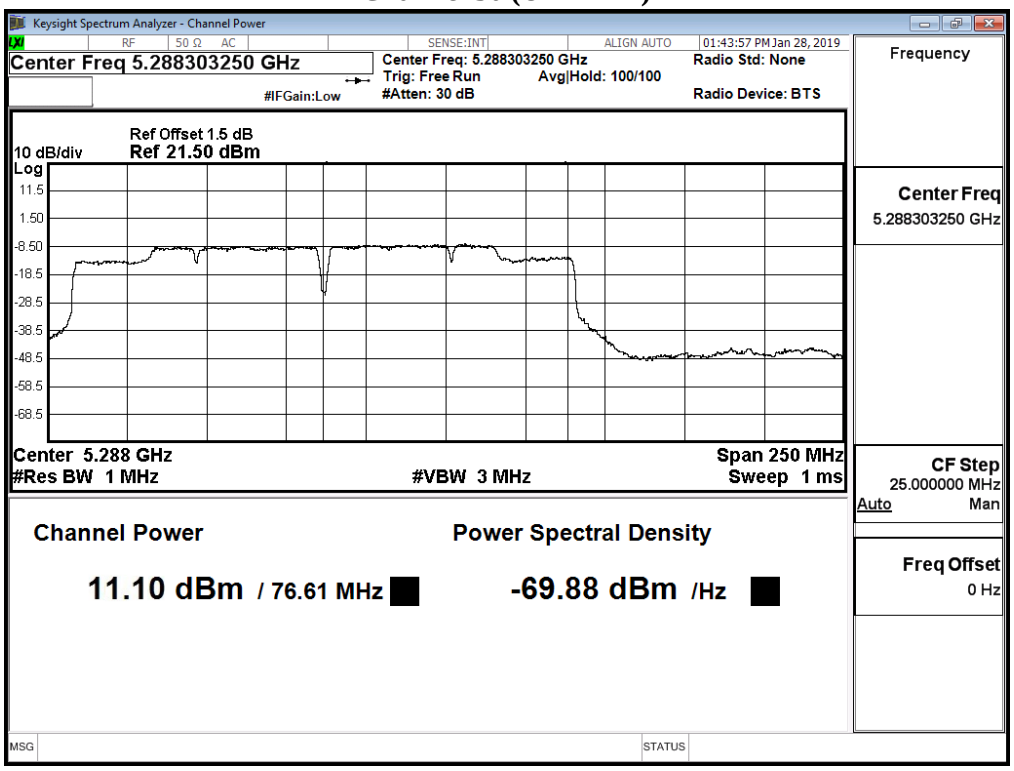

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測 試 項 目 ：峰值發射功率
測 試 頻 道 ：--　　測 試 模 式 ：Mode 2: SISO B: 發射器 802.11ax-20BW
檢 測 器 ：峰值　　環 境 溫 度 ：21 ℃
測 試 日 期 ：108 年 01 月 19 日　　環 境 濕 度 ：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
36	5180	18.15	--	--	--	--	--	--	--	--	--	--	--
44	5220	20.64	20.50	20.40	20.22	20.10	19.98	19.84	19.76	19.69	19.60	19.44	19.38
48	5240	19.13	--	--	--	--	--	--	--	--	--	--	--
52	5260	19.54	--	--	--	--	--	--	--	--	--	--	--
60	5300	20.82	20.66	20.54	20.46	20.38	20.29	20.23	20.16	20.10	19.95	19.84	19.69
64	5320	17.36	--	--	--	--	--	--	--	--	--	--	--
100	5500	18.43	--	--	--	--	--	--	--	--	--	--	--
116	5580	20.72	20.65	20.49	20.36	20.26	20.16	20.05	19.95	19.84	19.76	19.65	19.56
140	5700	19.24	--	--	--	--	--	--	--	--	--	--	--
144(U-NII-2C)	5720	19.56	19.50	19.33	19.19	19.01	18.88	18.79	18.69	18.61	18.46	18.29	18.21
144(U-NII-3)	5720	14.23	14.11	14.05	13.88	13.76	13.60	13.50	13.44	13.32	13.16	13.06	12.96
149	5745	20.37	--	--	--	--	--	--	--	--	--	--	--
157	5785	20.63	20.48	20.42	20.29	20.13	19.99	19.91	19.79	19.70	19.52	19.44	19.36
165	5825	20.07	--	--	--	--	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
36	5180	--	18.15	24	--
44	5220	--	20.64	24	--
48	5240	--	19.13	24	--
52	5260	19.069	19.54	24	23.80
60	5300	19.119	20.82	24	23.81
64	5320	19.093	17.36	24	23.81
100	5500	19.077	18.43	24	23.81
116	5580	19.101	20.72	24	23.81
140	5700	19.174	19.24	24	23.83
144(U-NII-2C)	5720	14.628	19.56	24	22.65
144(U-NII-3)	5720	--	14.23	30	--
149	5745	--	20.37	30	--
157	5785	--	20.63	30	--
165	5825	--	20.07	30	--

99% Occupied Bandwidth:

Channel 52

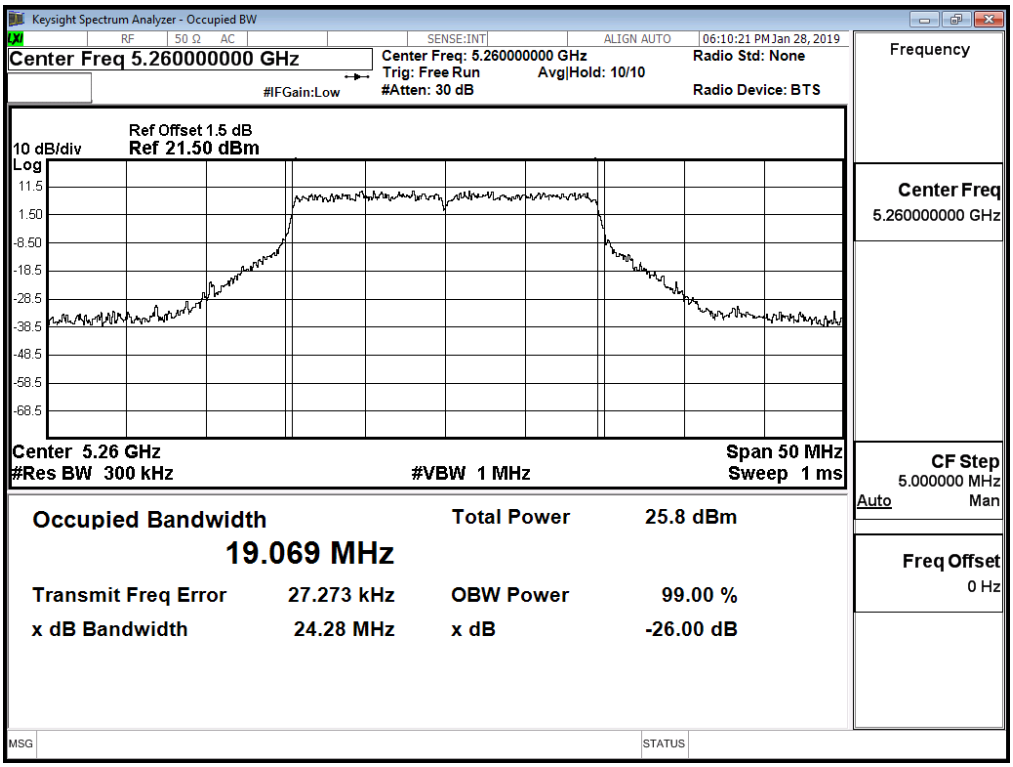

Channel 60

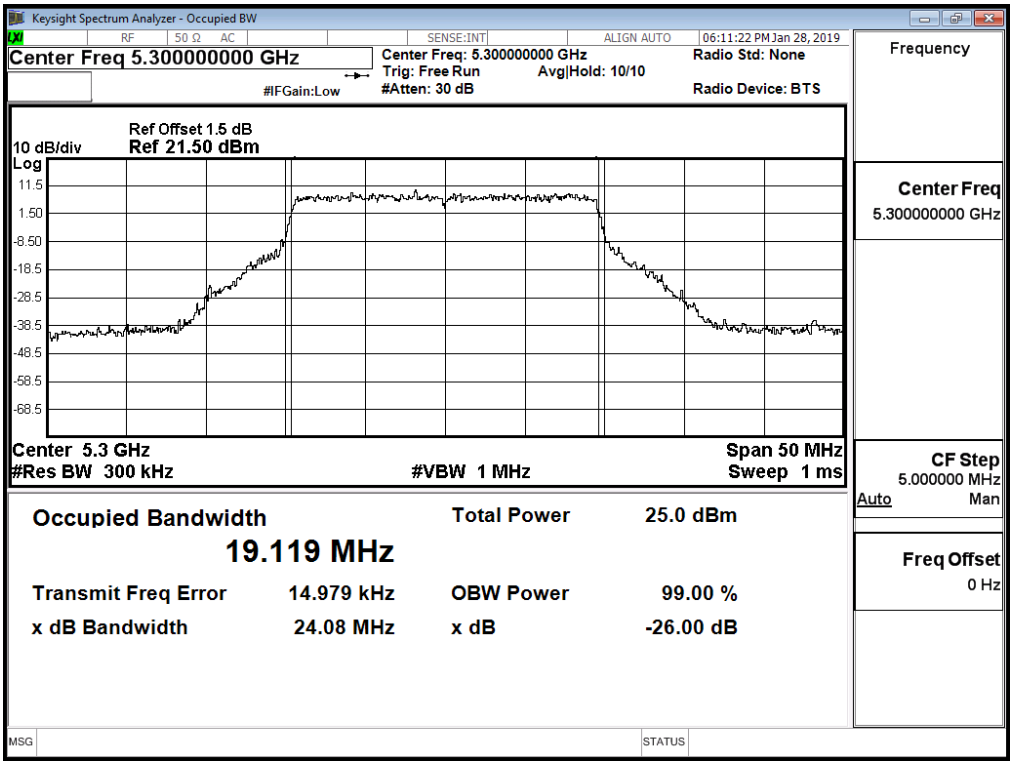

Channel 64

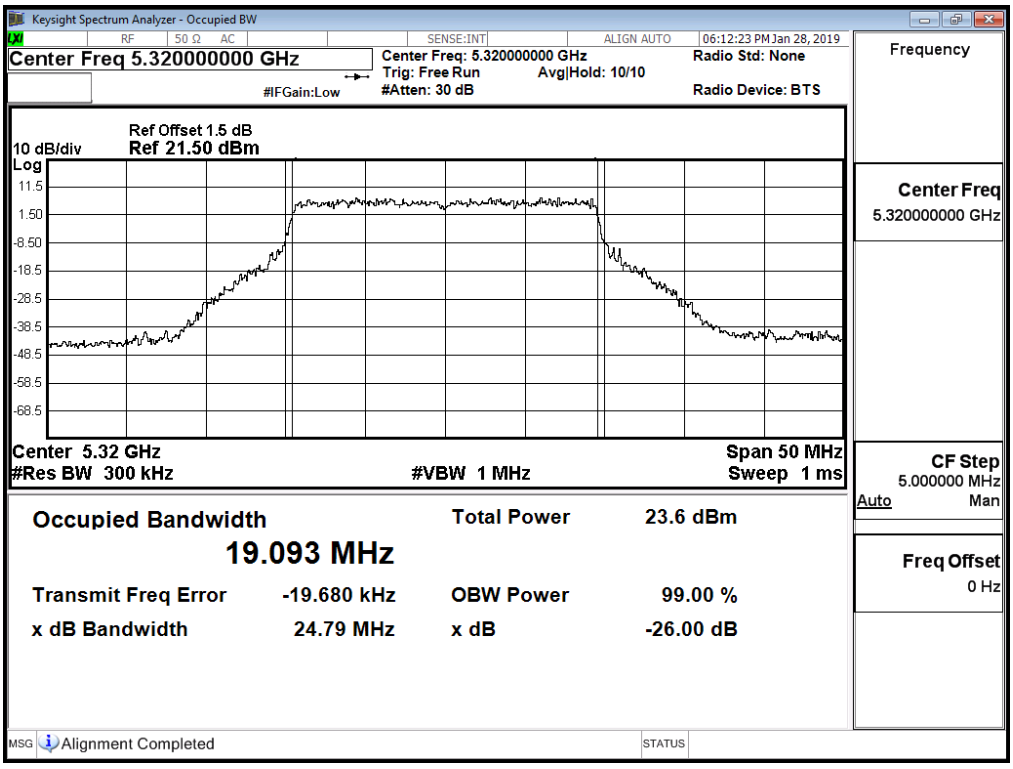

Channel 100

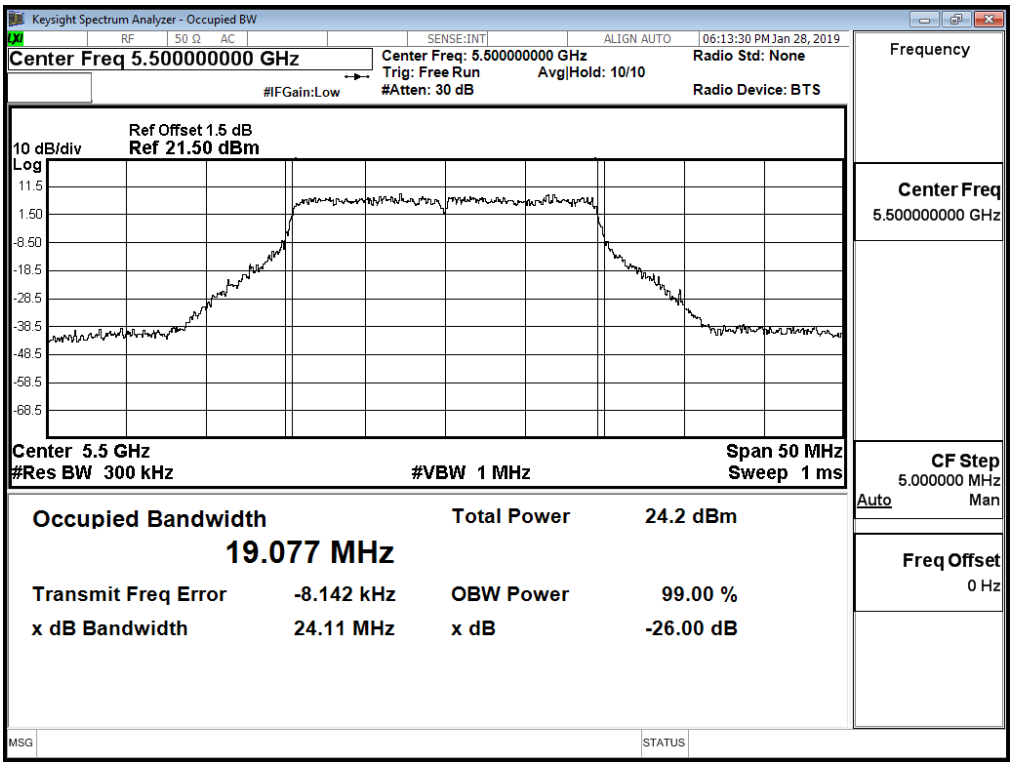

Channel 116

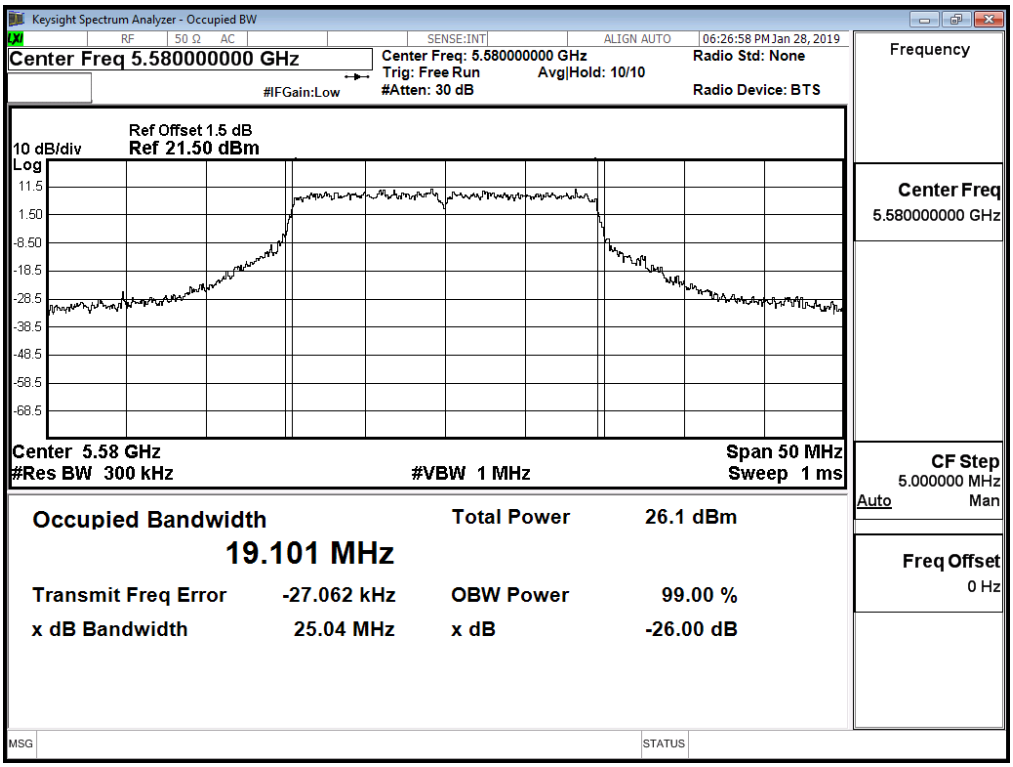

Channel 140

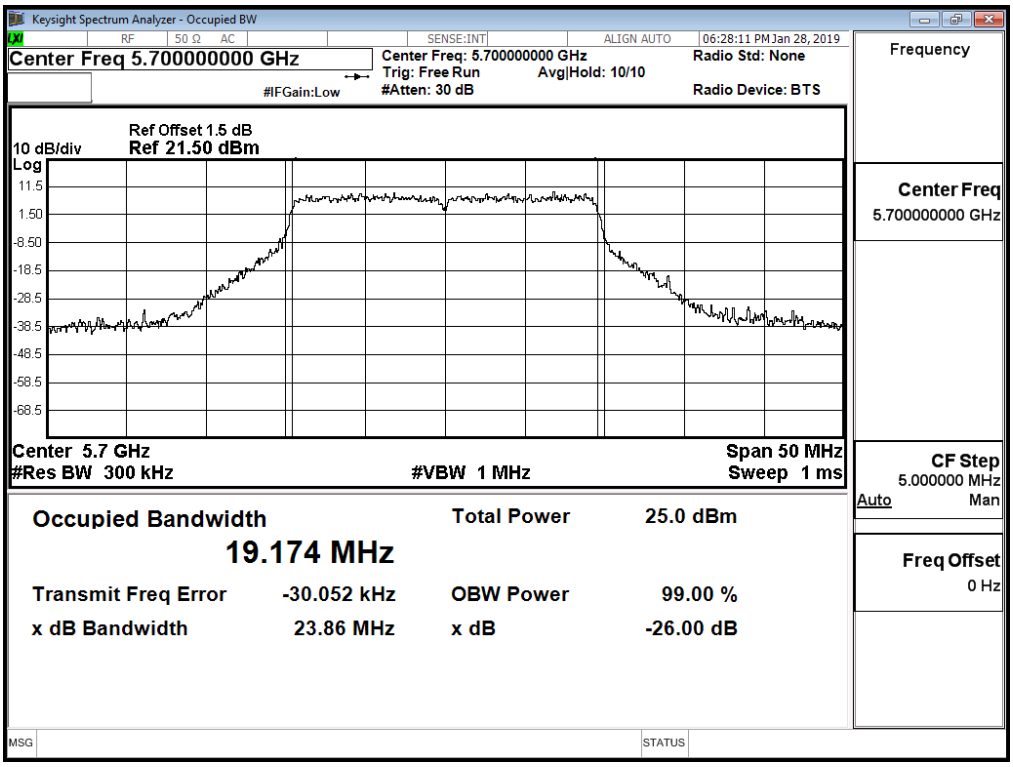

Channel 144

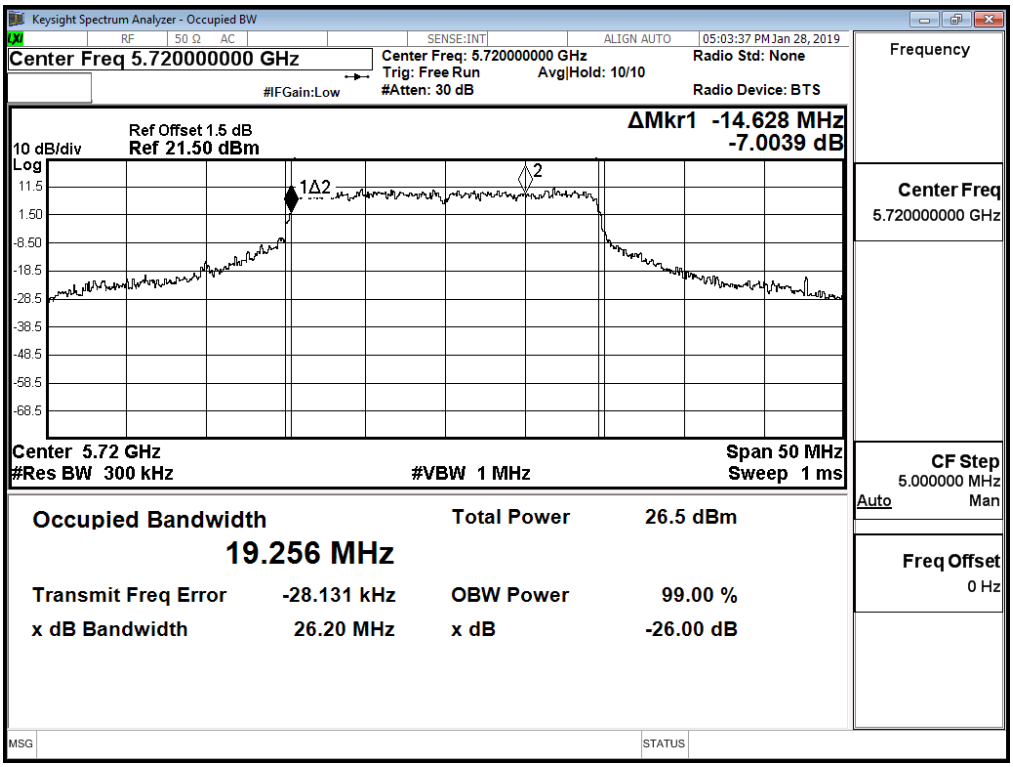
Keysight Spectrum Analyzer - Occupied BW
RF 50 Ω AC
SENSE:INT
ALIGN AUTO
05:03:37 PM Jan 28, 2019
Center Freq 5.720000000 GHz
Center Freq: 5.720000000 GHz
Trig: Free Run
Avg|Hold: 10/10
#Atten: 30 dB
#IFGain:Low
Radio Std: None
Radio Device: BTS
Frequency
Ref Offset 1.5 dB
10 dB/div
Ref 21.50 dBm
Log
ΔMkr1 -14.628 MHz
-7.0039 dB
1Δ2
2
11.5
1.50
-8.50
-18.5
-28.5
-38.5
-48.5
-58.5
-68.5
Center Freq
5.720000000 GHz
Center 5.72 GHz
#Res BW 300 kHz
#VBW 1 MHz
Span 50 MHz
Sweep 1 ms
CF Step
5.000000 MHz
Auto
Man
Occupied Bandwidth
19.256 MHz
Total Power 26.5 dBm
Freq Offset
0 Hz
Transmit Freq Error -28.131 kHz
OBW Power 99.00 %
x dB Bandwidth 26.20 MHz
x dB -26.00 dB
MSG
STATUS

Maximum conducted output power:

Channel 144 (U-NII-2C)

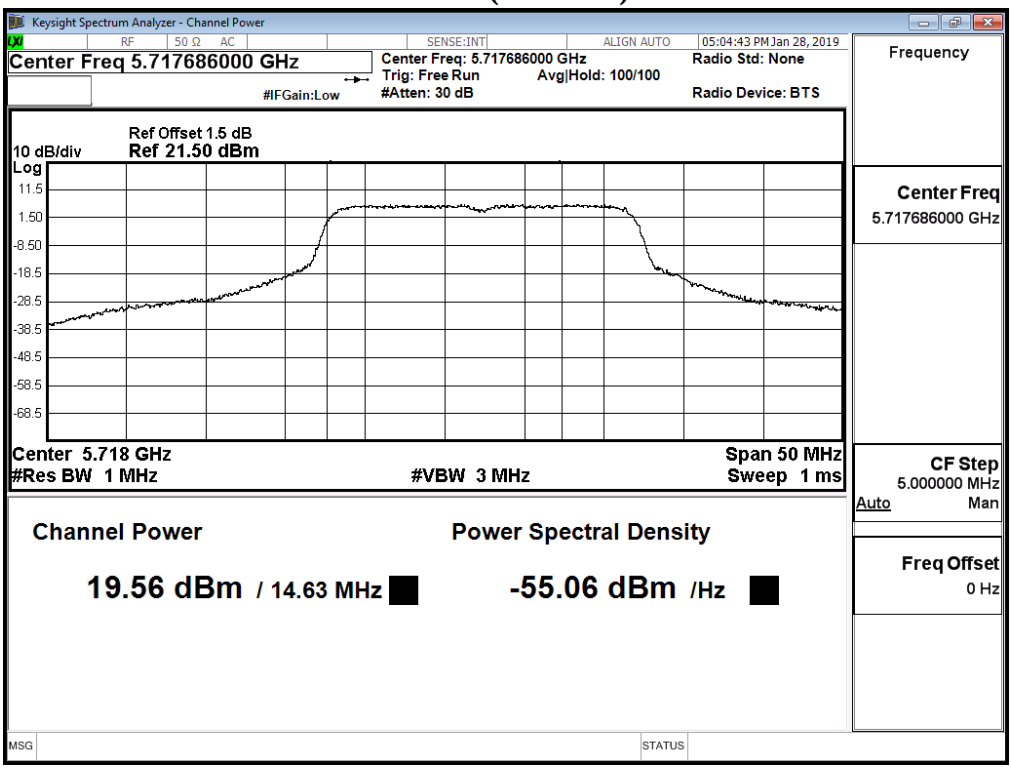

Maximum conducted output power:

Channel 144 (U-NII-3)

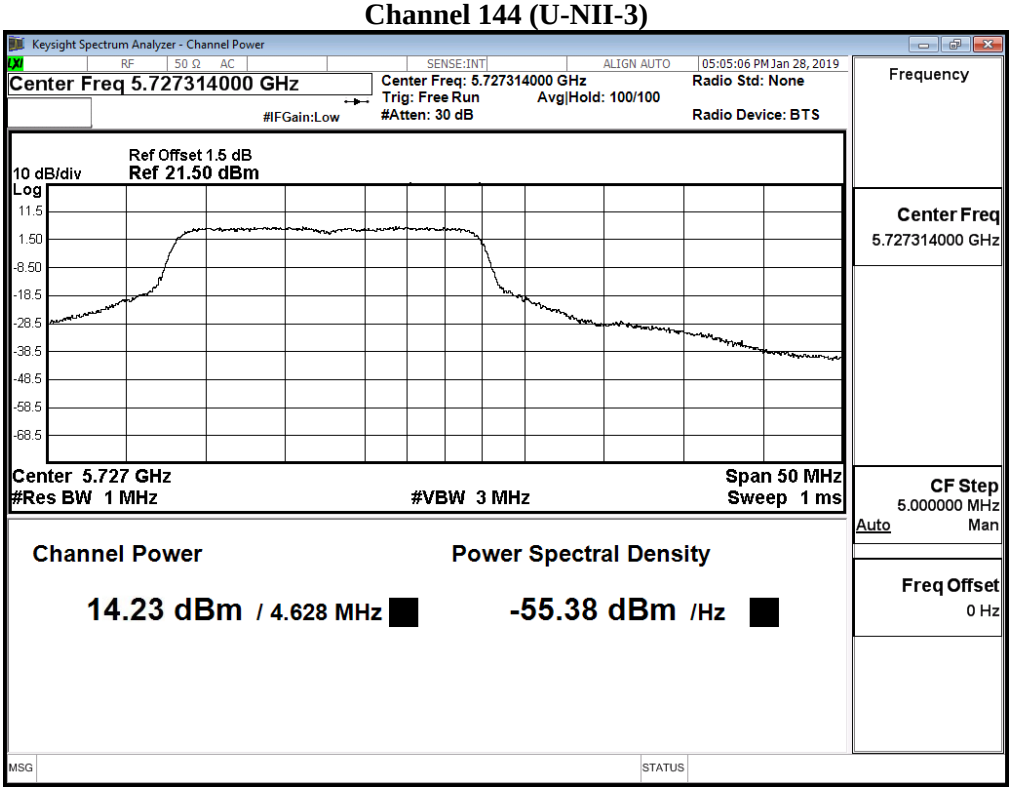

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 2: SISO B: 發射器 802.11ax-40BW
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
38	5190	17.52	--	--	--	--	--	--	--	--	--	--	--
46	5230	18.89	18.80	18.70	18.54	18.36	18.23	18.15	17.99	17.91	17.85	17.74	17.59
54	5270	18.81	--	--	--	--	--	--	--	--	--	--	--
62	5310	15.44	15.30	15.21	15.14	15.01	14.84	14.77	14.59	14.49	14.34	14.23	14.06
102	5510	17.97	--	--	--	--	--	--	--	--	--	--	--
110	5550	19.71	19.63	19.45	19.37	19.26	19.14	18.97	18.85	18.72	18.58	18.49	18.35
134	5670	19.62	--	--	--	--	--	--	--	--	--	--	--
142(U-NII-2C)	5710	20.43	20.32	20.23	20.09	19.98	19.89	19.80	19.63	19.50	19.33	19.17	19.10
142(U-NII-3)	5710	10.85	10.79	10.63	10.48	10.34	10.17	10.00	9.84	9.78	9.66	9.51	9.43
151	5755	20.81	--	--	--	--	--	--	--	--	--	--	--
159	5795	20.09	20.02	19.91	19.76	19.69	19.56	19.44	19.26	19.14	19.00	18.87	18.78

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
38	5190	--	17.52	24	--
46	5230	--	18.89	24	--
54	5270	37.877	18.81	24	26.78
62	5310	37.913	15.44	24	26.79
102	5510	37.867	17.97	24	26.78
110	5550	37.903	19.71	24	26.79
134	5670	37.877	19.62	24	26.78
142(U-NII-2C)	5710	34.064	20.43	24	26.32
142(U-NII-3)	5710	--	10.85	30	--
151	5755	--	20.81	30	--
159	5795	--	20.09	30	--

99% Occupied Bandwidth:

Channel 54

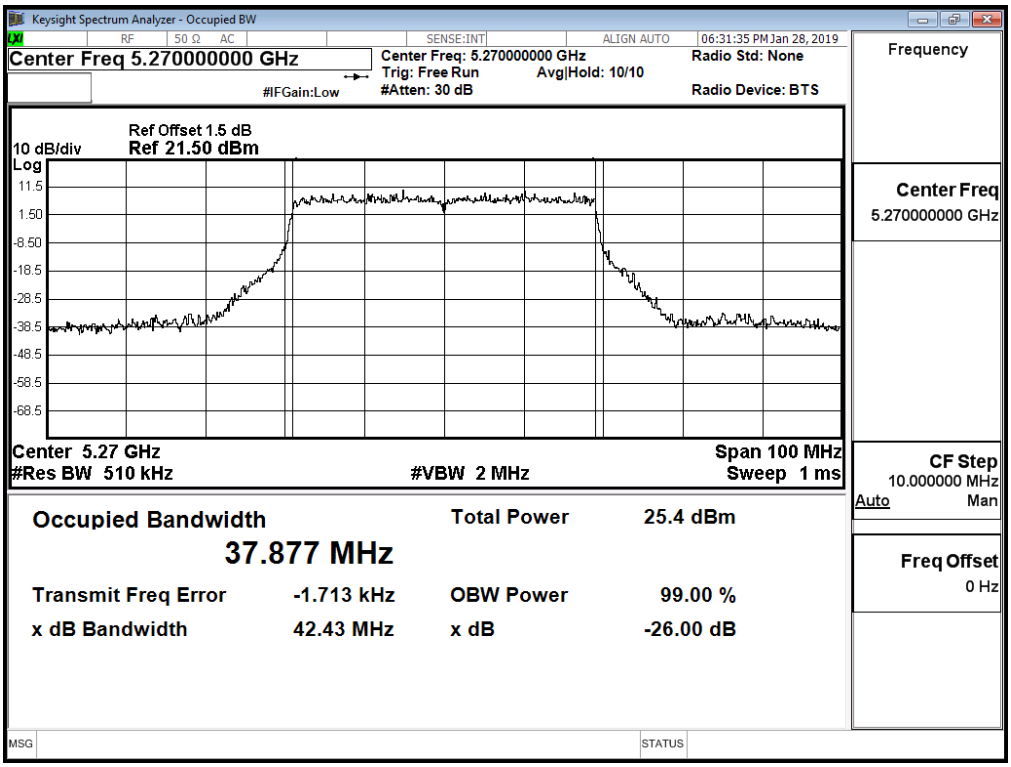

Channel 62

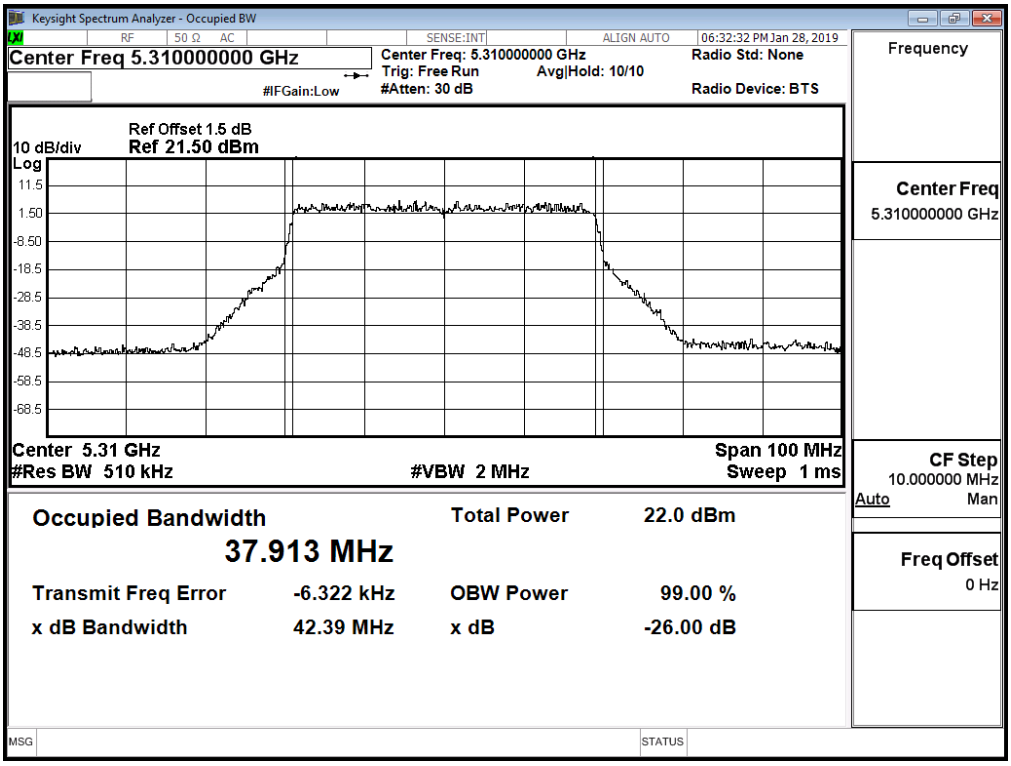

Channel 102

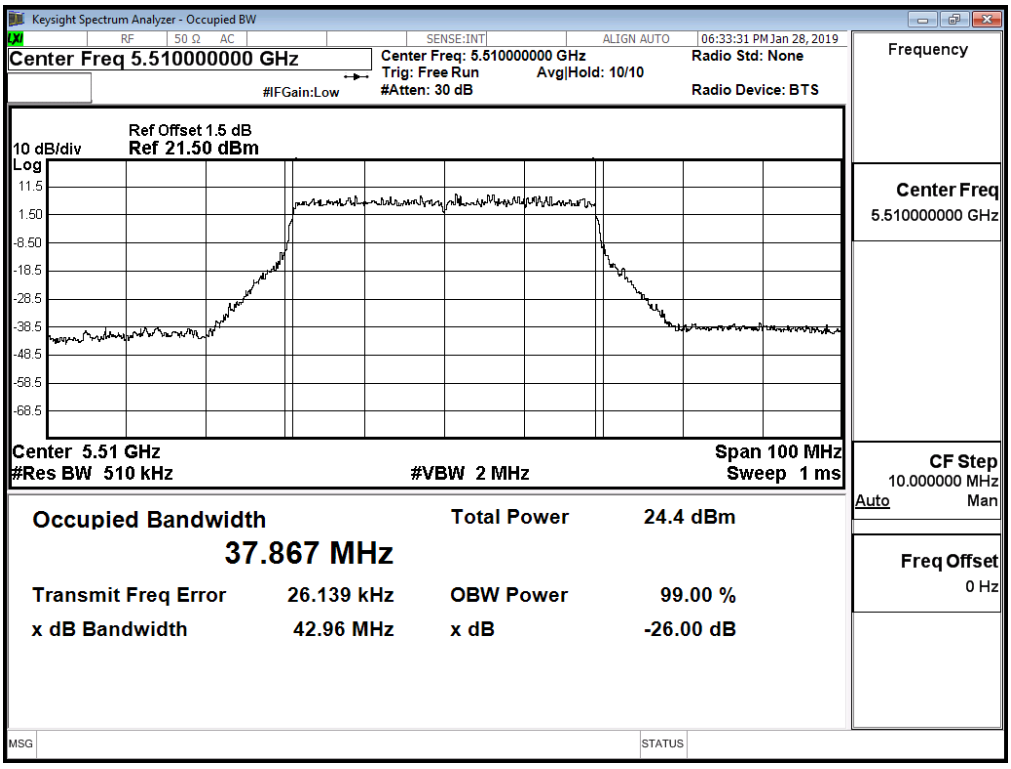

Channel 110

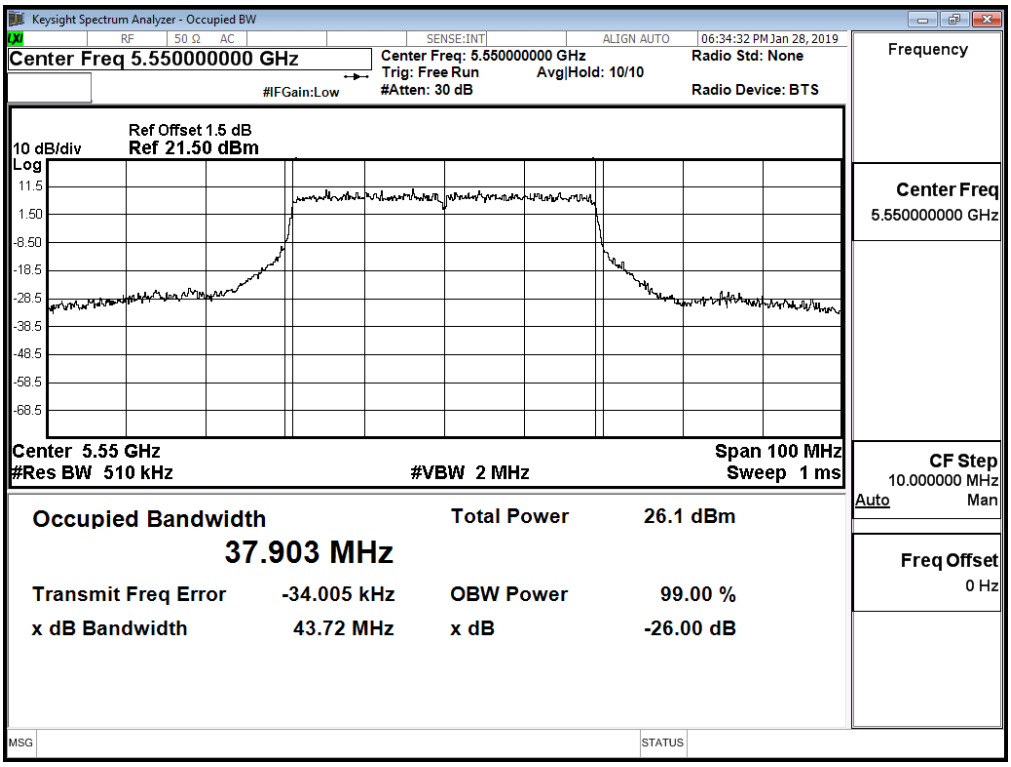

Channel 134

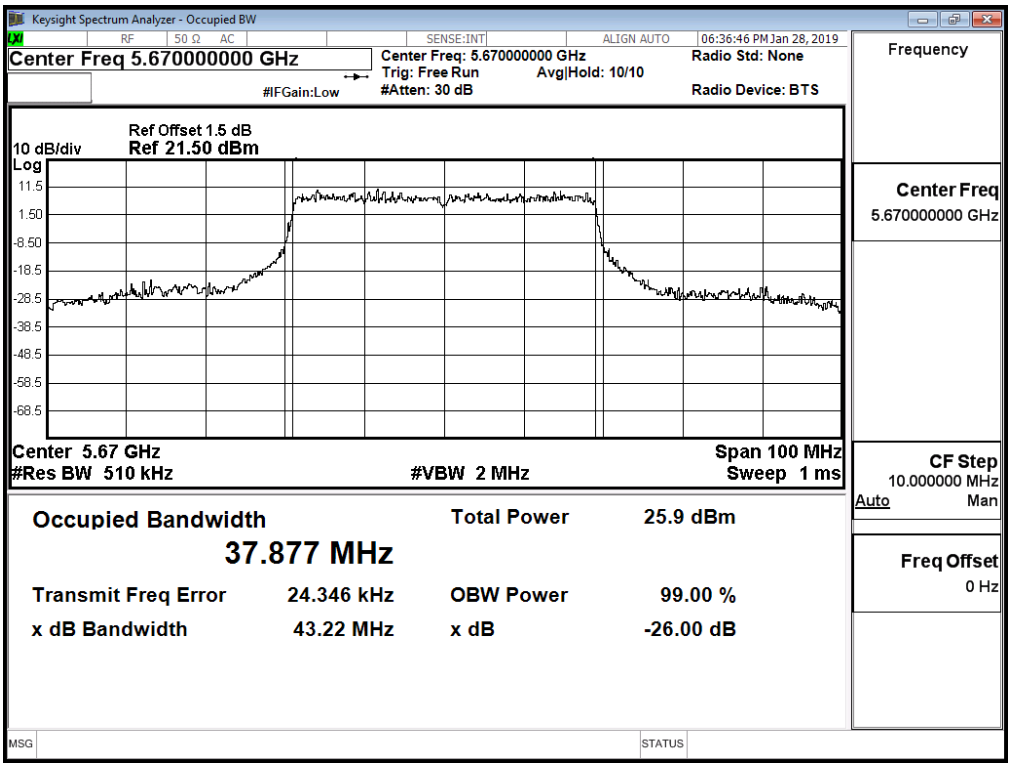

Channel 142

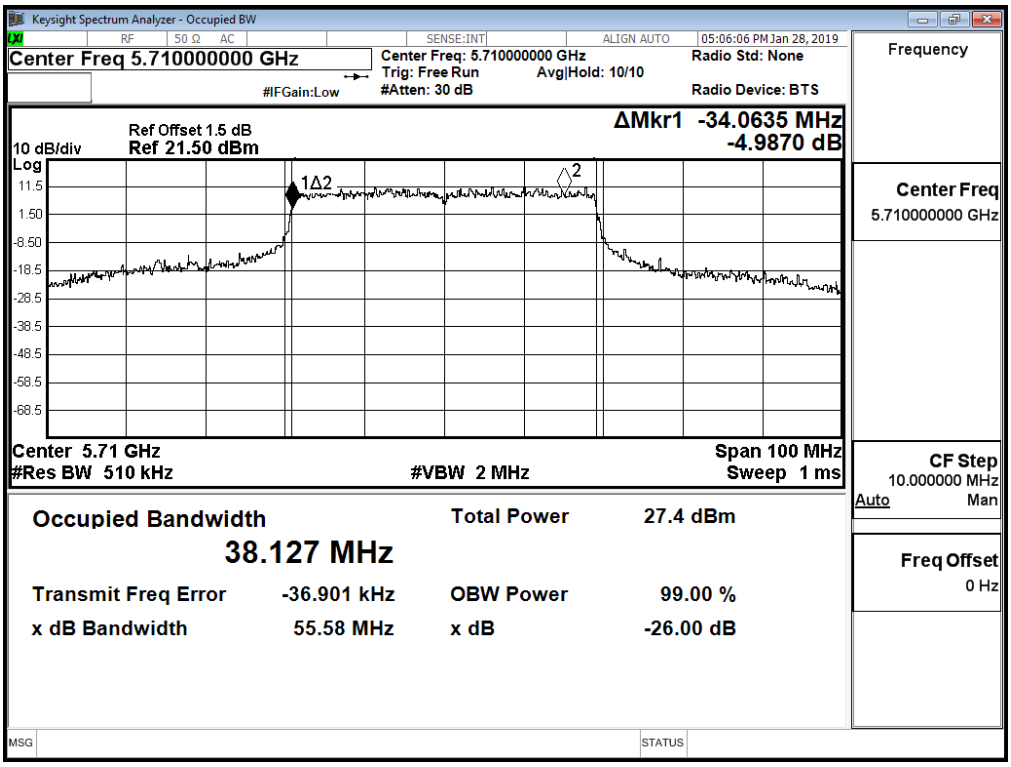

Maximum conducted output power:

Channel 142 (U-NII-2C)

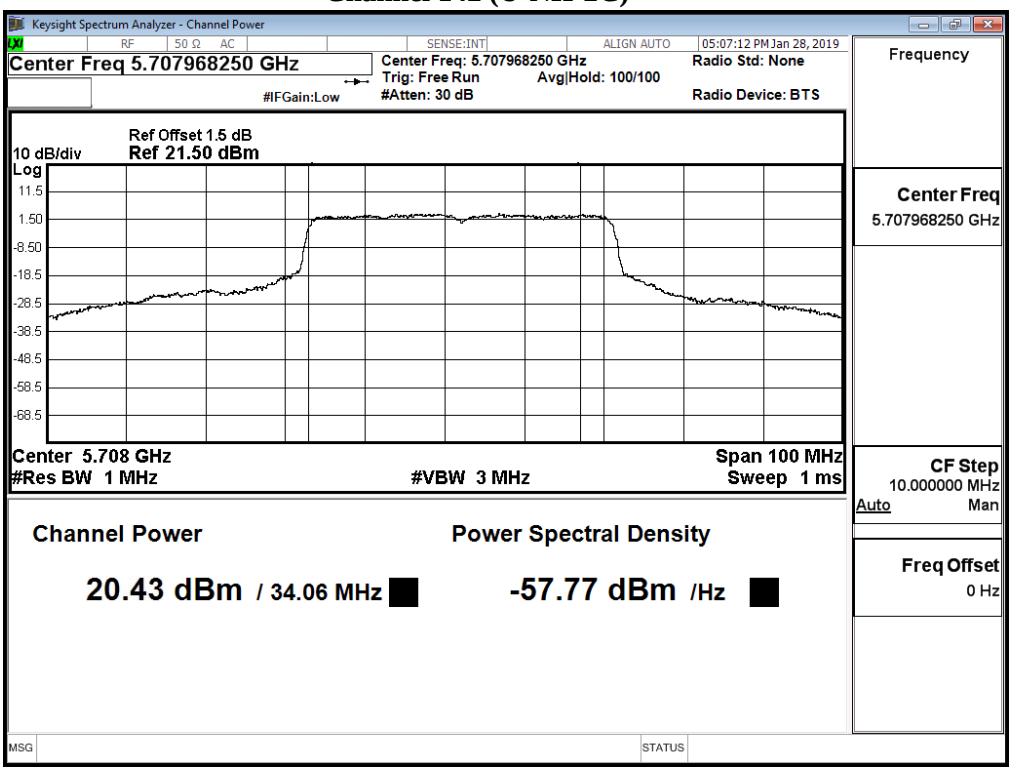

Maximum conducted output power:

Channel 142 (U-NII-3)

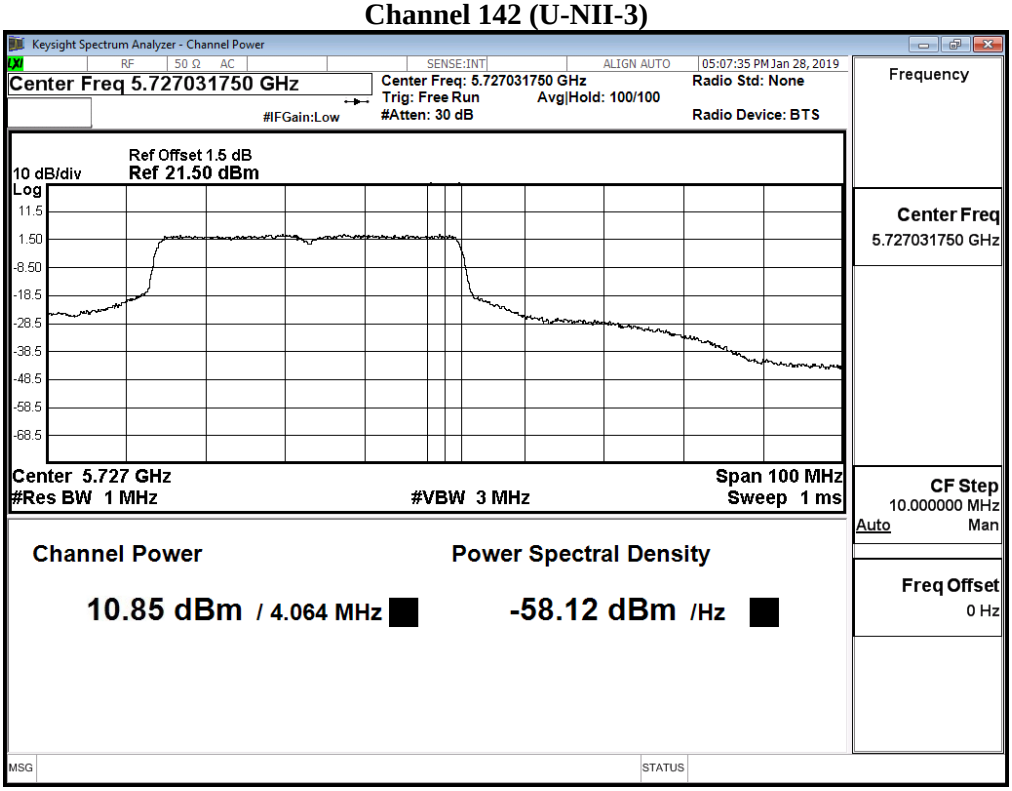

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 2: SISO B: 發射器 802.11ax-80BW
6 dB 頻寬：1MHz　　視頻頻寬：3MHz
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
42	5210	17.49	17.31	17.21	17.08	16.96	16.90	16.83	16.68	16.54	16.46	16.34	16.28
58	5290	16.81	16.67	16.56	16.43	16.36	16.25	16.08	15.96	15.90	15.77	15.68	15.52
106	5530	17.85	--	--	--	--	--	--	--	--	--	--	--
122	5610	19.2	19.12	19.03	18.85	18.71	18.57	18.43	18.31	18.14	18.03	17.85	17.73
138 (U-NII-2C)	5690	20.51	--	--	--	--	--	--	--	--	--	--	--
138 (U-NII-3)	5690	4.77	--	--	--	--	--	--	--	--	--	--	--
155	5775	18.88	18.70	18.57	18.51	18.33	18.16	18.08	17.95	17.84	17.78	17.64	17.51

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
42	5210	--	17.49	24	--
58	5290	76.856	16.81	24	29.86
106	5530	76.704	17.85	24	29.85
122	5610	76.738	19.20	24	29.85
138 (U-NII-2C)	5690	73.659	20.51	24	29.67
138 (U-NII-3)	5690	3.659	4.77	30	16.63
155	5775	--	18.88	30	--

99% Occupied Bandwidth:

Channel 58

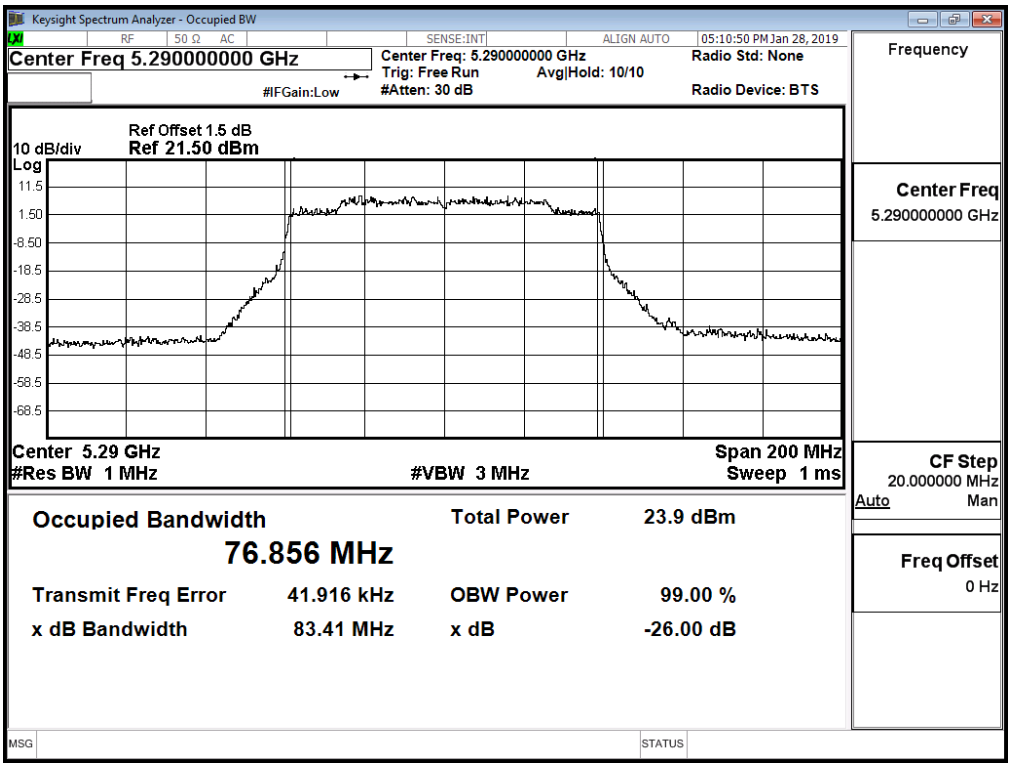

Channel 106

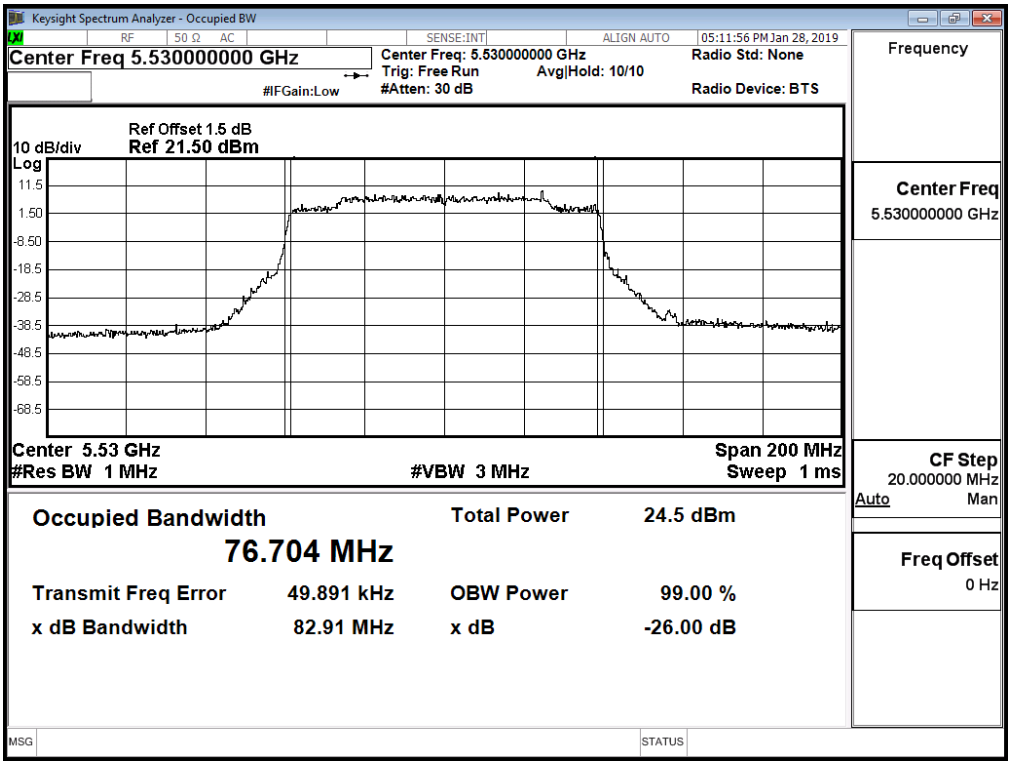

Channel 122

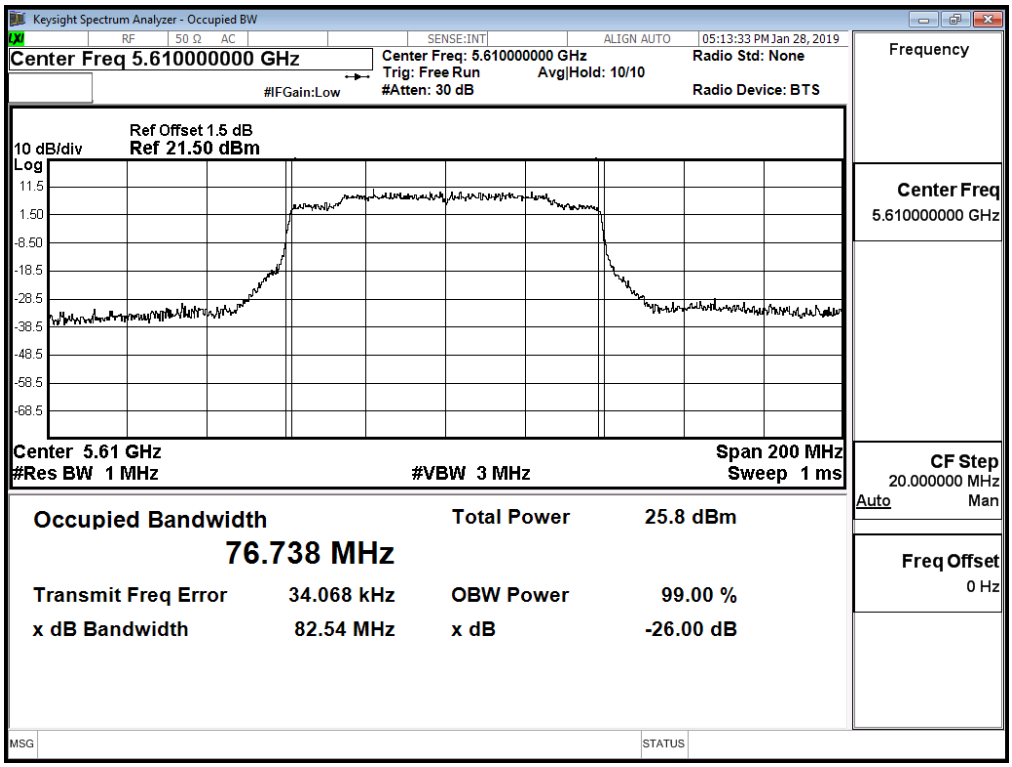

Channel 138

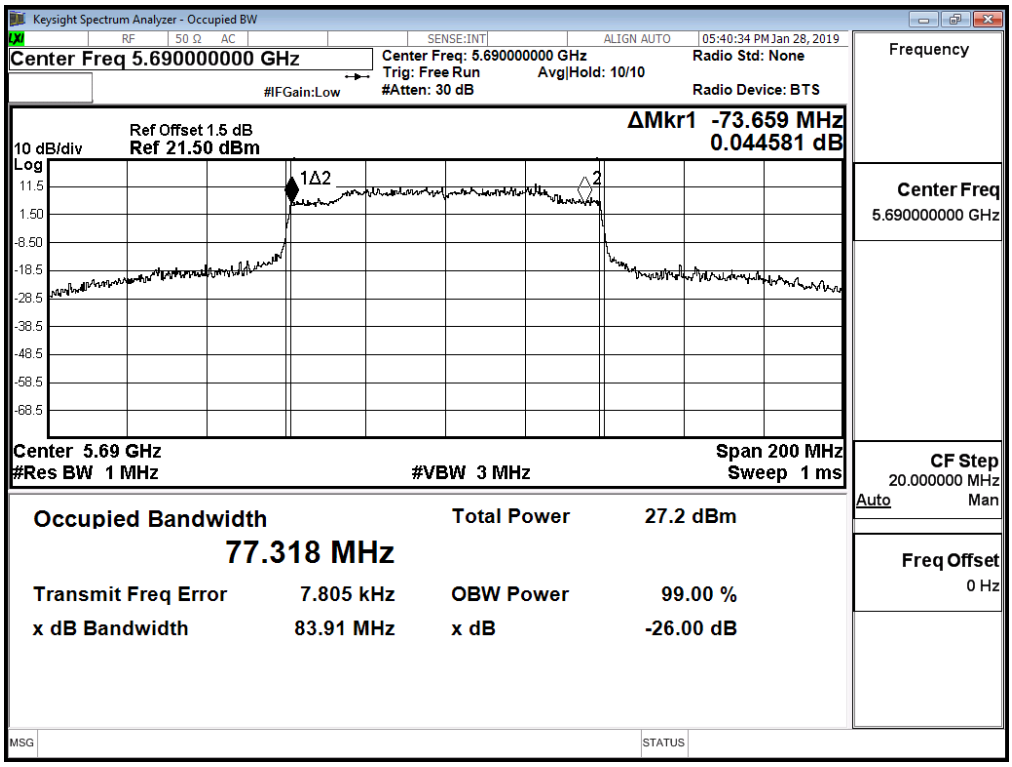

Maximum conducted output power:

Channel 138 (U-NII-2C)

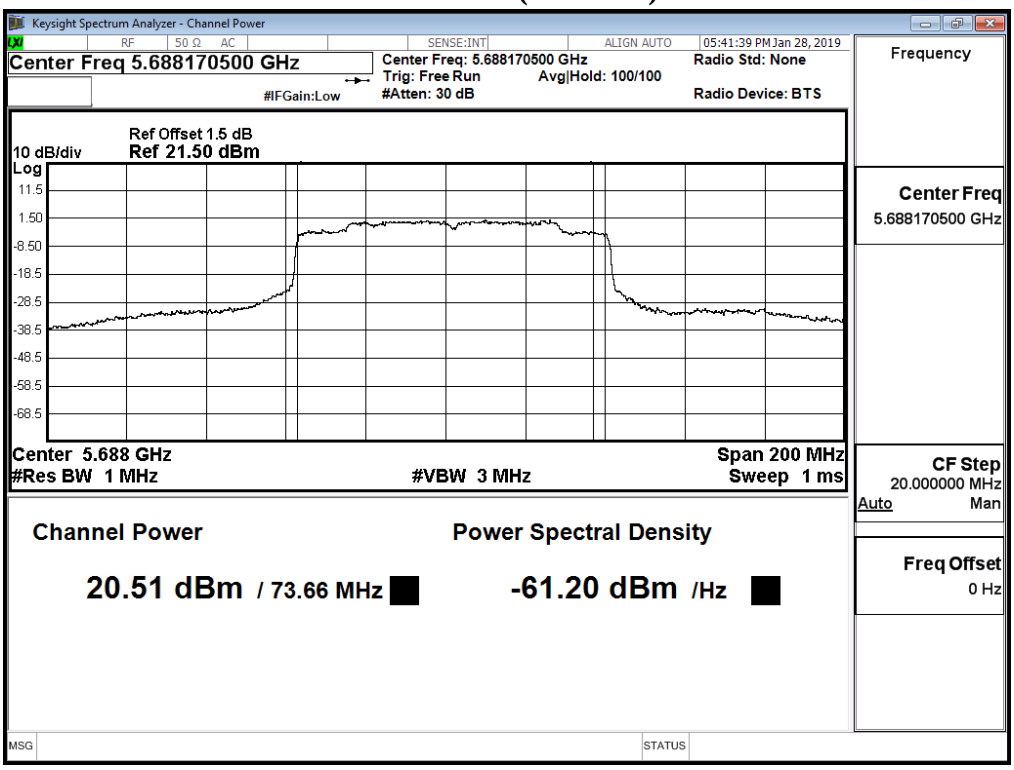

Maximum conducted output power:

Channel 138 (U-NII-3)

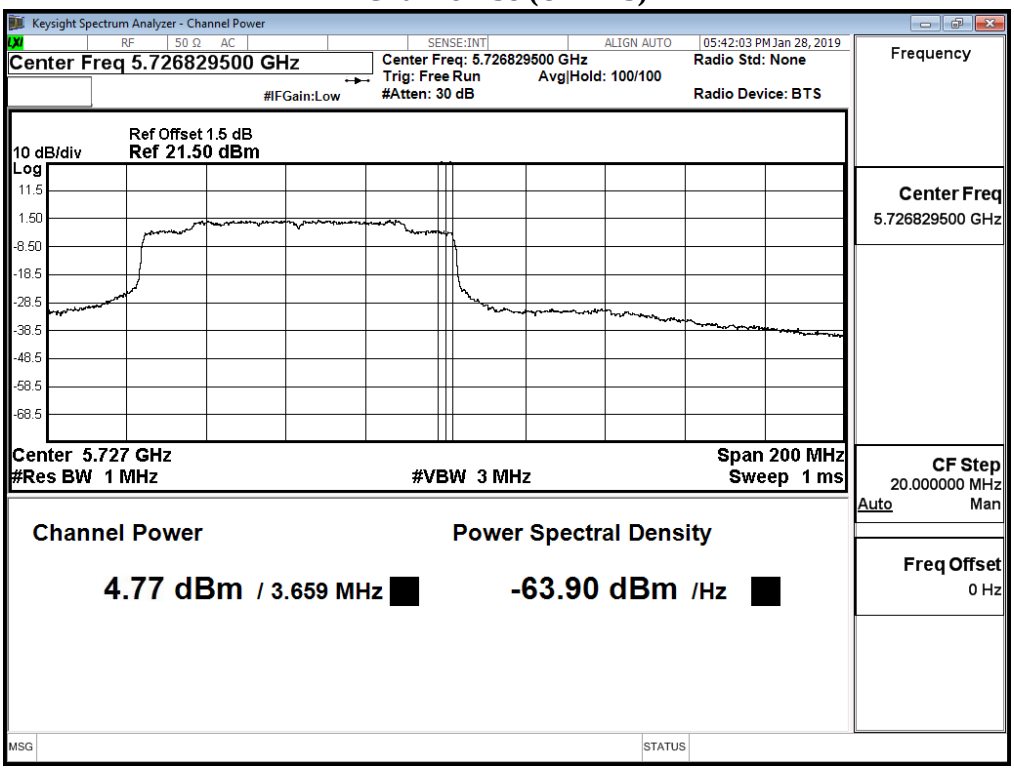

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 2: SISO B: 發射器 802.11ax-160BW
6 dB 頻寬：1MHz　　視頻頻寬：3MHz
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
50 (U-NII-1)	5250	10.95	10.77	10.67	10.49	10.36	10.24	10.07	9.89	9.78	9.63	9.51	9.36
50 (U-NII-2A)	5250	11.26	11.08	10.92	10.76	10.61	10.52	10.34	10.22	10.12	10.06	9.91	9.74
114	5570	14.76	14.60	14.50	14.40	14.22	14.04	13.97	13.84	13.66	13.57	13.41	13.27

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
50 (U-NII-1)	5250	--	10.95	24	--
50 (U-NII-2A)	5250	77.355	11.26	24	29.88
114	5570	154.720	14.76	24	32.90

99% Occupied Bandwidth:

Channel 50

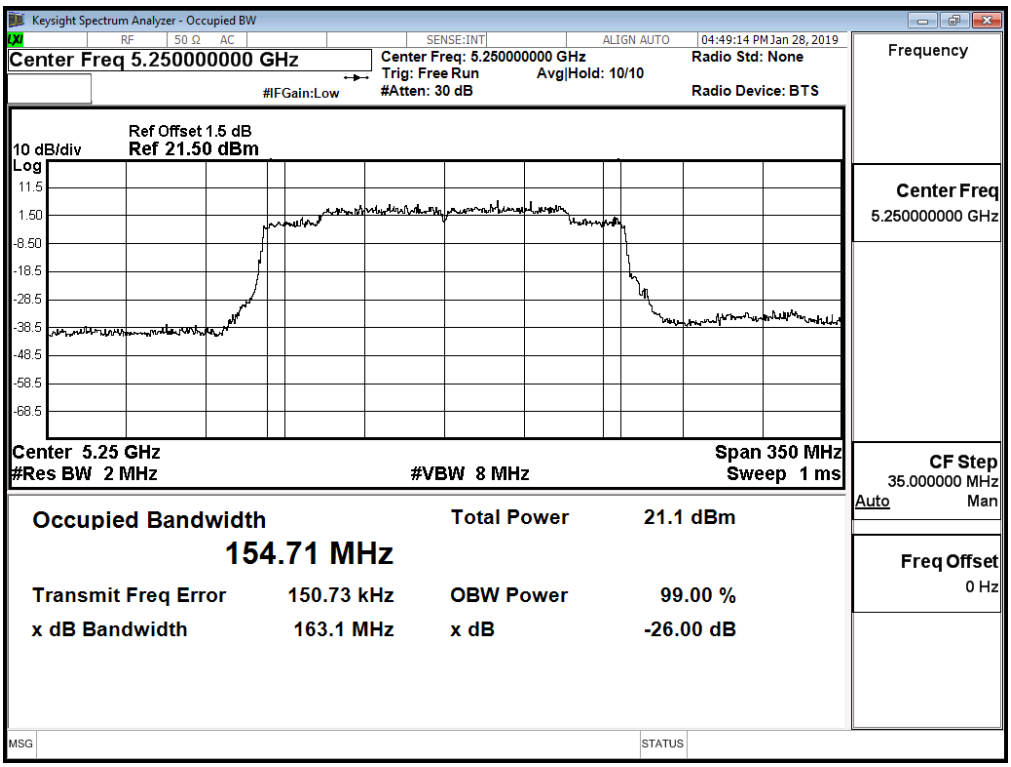

Channel 114

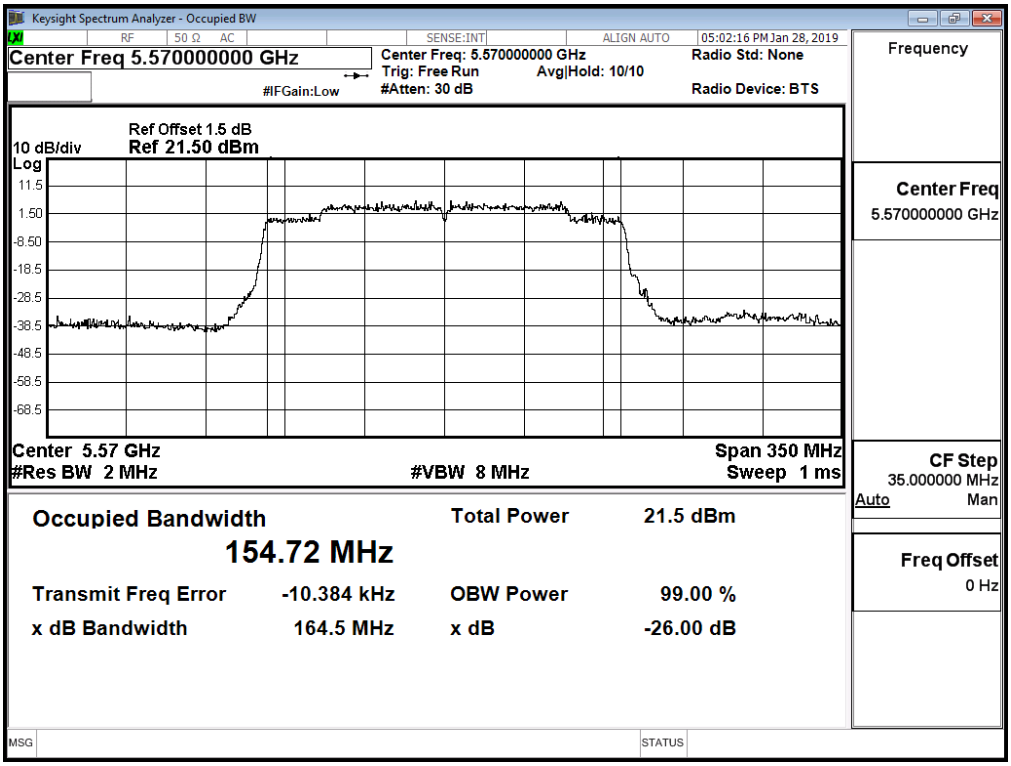

Maximum conducted output power:

Channel 50 (U-NII-1)

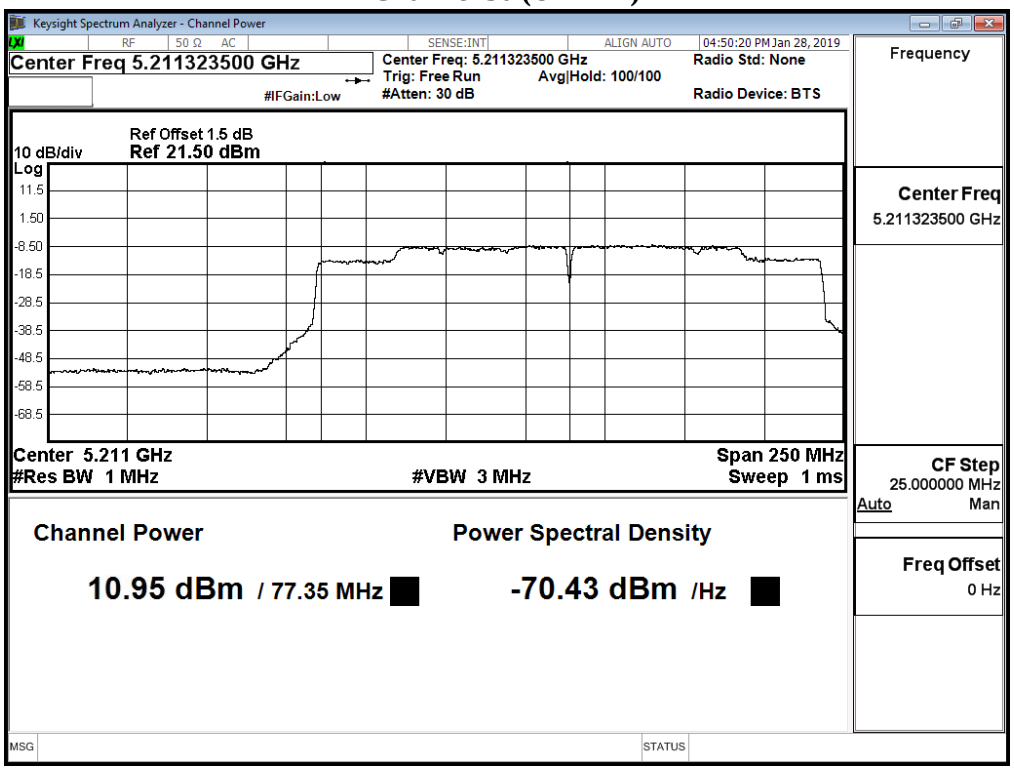

Maximum conducted output power:

Channel 50 (U-NII-2A)

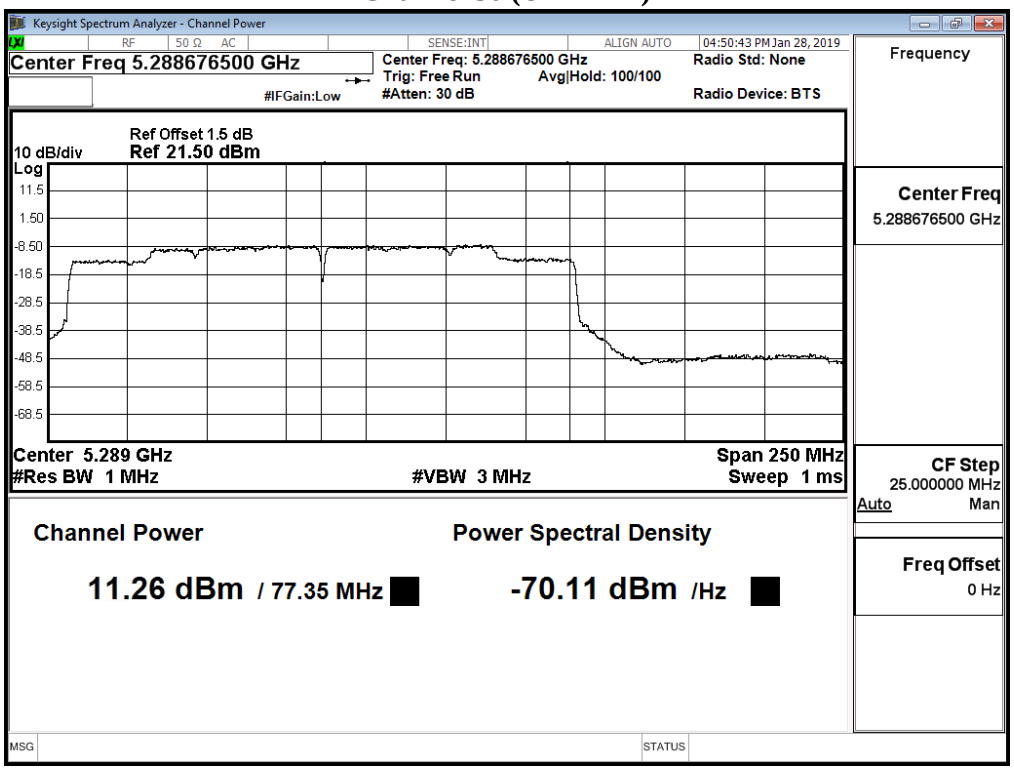

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測 試 項 目 ：峰值發射功率
測 試 頻 道 ：--　　測 試 模 式 ：Mode 3: MIMO: 發射器 802.11ax-20BW
檢 測 器 ：峰值　　環 境 溫 度 ：21 ℃
測 試 日 期 ：108 年 01 月 19 日　　環 境 濕 度 ：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
36	5180	17.46	--	--	--	--	--	--	--	--	--	--	--
44	5220	19.48	19.36	19.21	19.12	19.00	18.91	18.83	18.69	18.52	18.38	18.22	18.09
48	5240	18.39	--	--	--	--	--	--	--	--	--	--	--
52	5260	18.44	--	--	--	--	--	--	--	--	--	--	--
60	5300	19.07	18.92	18.81	18.63	18.49	18.38	18.27	18.12	17.96	17.89	17.73	17.58
64	5320	16.4	--	--	--	--	--	--	--	--	--	--	--
100	5500	17.28	--	--	--	--	--	--	--	--	--	--	--
116	5580	19.12	19.00	18.90	18.81	18.71	18.63	18.45	18.30	18.20	18.14	17.96	17.87
140	5700	16.6	--	--	--	--	--	--	--	--	--	--	--
144(U-NII-2C)	5720	18.1	9.74	9.62	9.44	9.33	9.23	9.12	8.96	8.86	8.75	8.57	8.49
144(U-NII-3)	5720	12.89	9.61	9.47	9.31	9.18	9.1	9	8.84	8.68	8.62	8.48	8.42
149	5745	19.32	--	--	--	--	--	--	--	--	--	--	--
157	5785	19.37	19.20	19.05	18.94	18.87	18.77	18.71	18.56	18.43	18.26	18.10	18.02
165	5825	19.32	--	--	--	--	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
36	5180	17.37	--	--	--	--	--	--	--	--	--	--	--
44	5220	19.23	19.17	19.07	19.00	18.91	18.79	18.65	18.52	18.44	18.31	18.18	18.03
48	5240	18.35	--	--	--	--	--	--	--	--	--	--	--
52	5260	18.72	--	--	--	--	--	--	--	--	--	--	--
60	5300	19.16	19.01	18.94	18.79	18.73	18.64	18.50	18.41	18.27	18.20	18.04	17.94
64	5320	16.35	--	--	--	--	--	--	--	--	--	--	--
100	5500	17.35	--	--	--	--	--	--	--	--	--	--	--
116	5580	19.23	19.16	19.03	18.88	18.73	18.55	18.48	18.37	18.26	18.14	18.01	17.86
140	5700	16.34	--	--	--	--	--	--	--	--	--	--	--
144(U-NII-2C)	5720	18.02	17.90	17.83	17.75	17.63	17.56	17.45	17.30	17.24	17.13	17.04	16.96
144(U-NII-3)	5720	13.23	13.16	13.07	12.89	12.79	12.62	12.47	12.37	12.26	12.15	12.07	11.93
149	5745	19.16	--	--	--	--	--	--	--	--	--	--	--
157	5785	19.41	19.34	19.26	19.15	19.05	18.94	18.76	18.62	18.49	18.38	18.22	18.11
165	5825	19.24	--	--	--	--	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	--	17.46	17.37	20.43	24	--
44	5220	--	19.48	19.23	22.37	24	--
48	5240	--	18.39	18.35	21.38	24	--
52	5260	19.107	18.44	18.72	21.59	24	23.81
60	5300	19.112	19.07	19.16	22.13	24	23.81
64	5320	19.094	16.4	16.35	19.39	24	23.81
100	5500	19.133	17.28	17.35	20.33	24	23.82
116	5580	19.137	19.12	19.23	22.19	24	23.82
140	5700	19.074	16.6	16.34	19.48	24	23.80
144(U-NII-2C)	5720	14.578	18.1	18.02	21.07	24	22.64
144(U-NII-3)	5720	--	12.89	13.23	16.07	30	--
149	5745	--	19.32	19.16	22.25	30	--
157	5785	--	19.37	19.41	22.40	30	--
165	5825	--	19.32	19.24	22.29	30	--

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:

Channel 52 (Chain A)

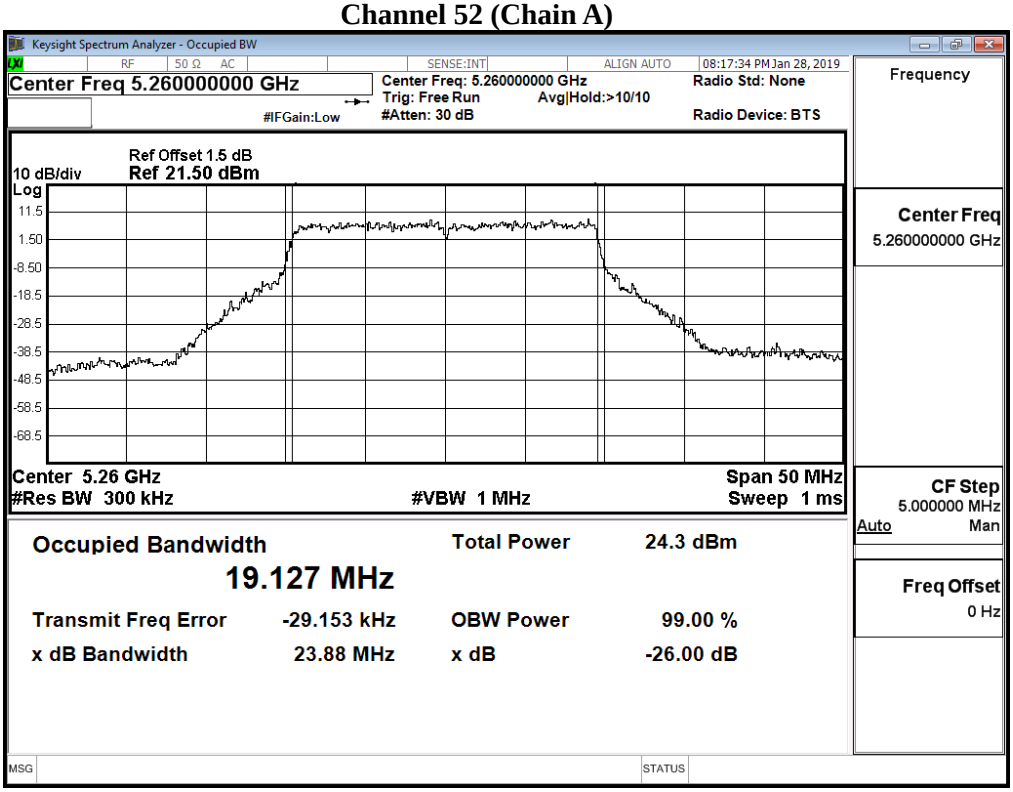

Channel 52 (Chain B)

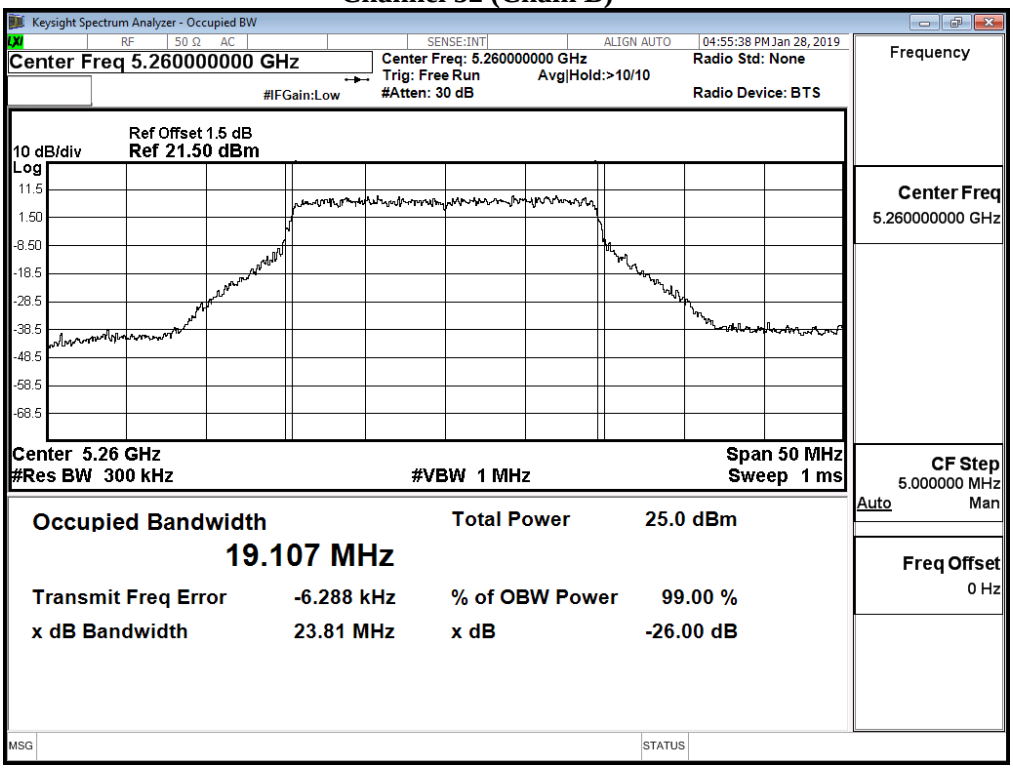

Channel 60 (Chain A)

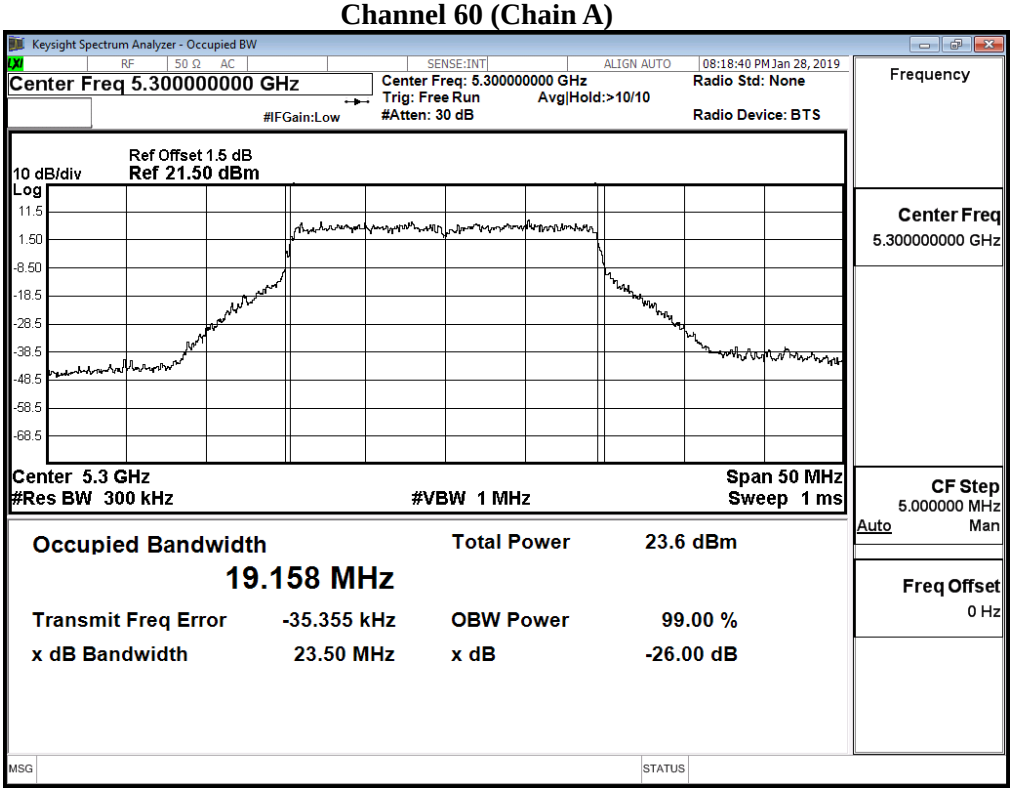

Channel 60 (Chain B)

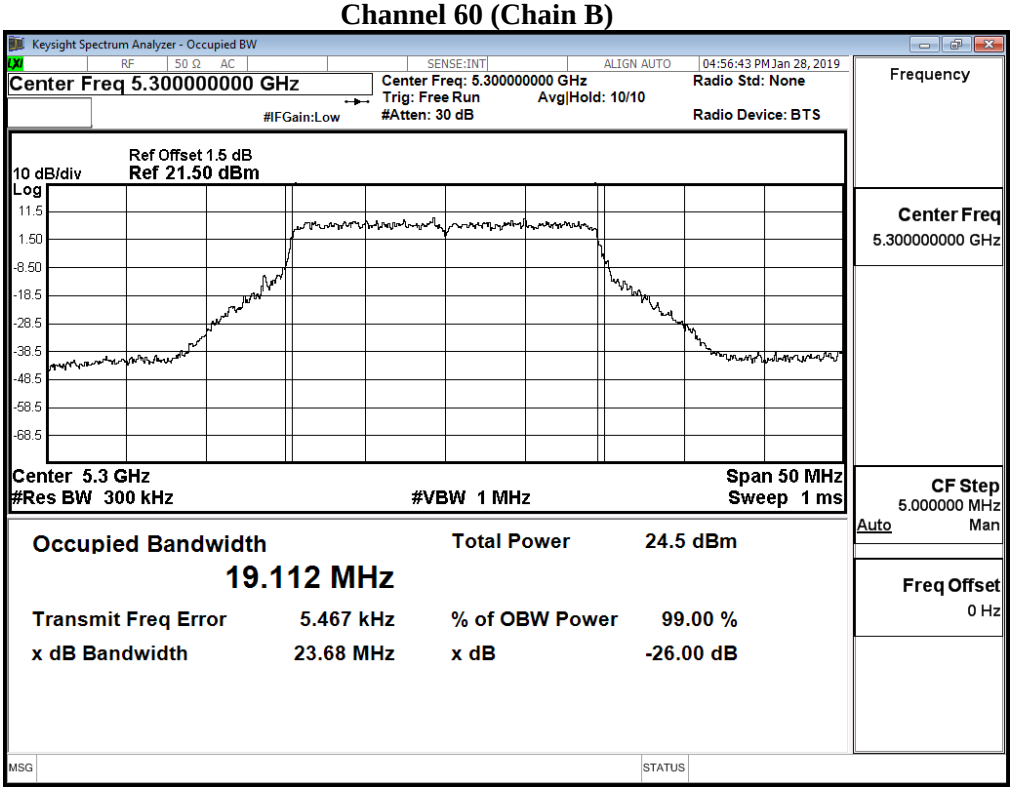

Channel 64 (Chain A)

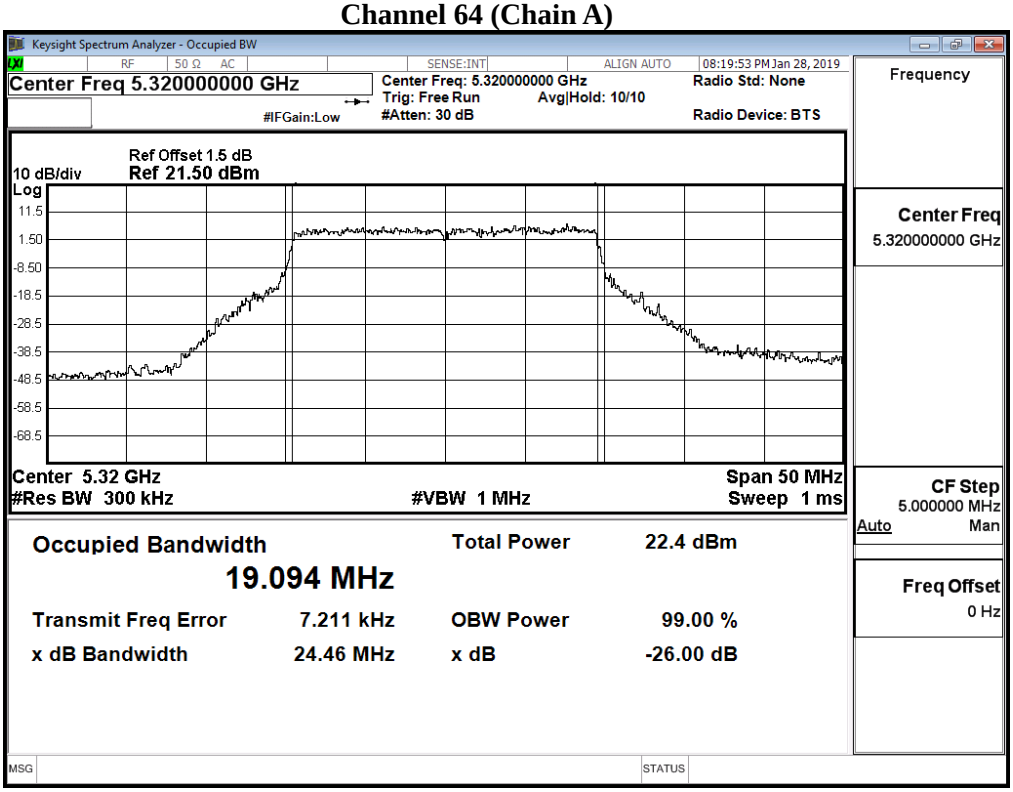

Channel 64 (Chain B)

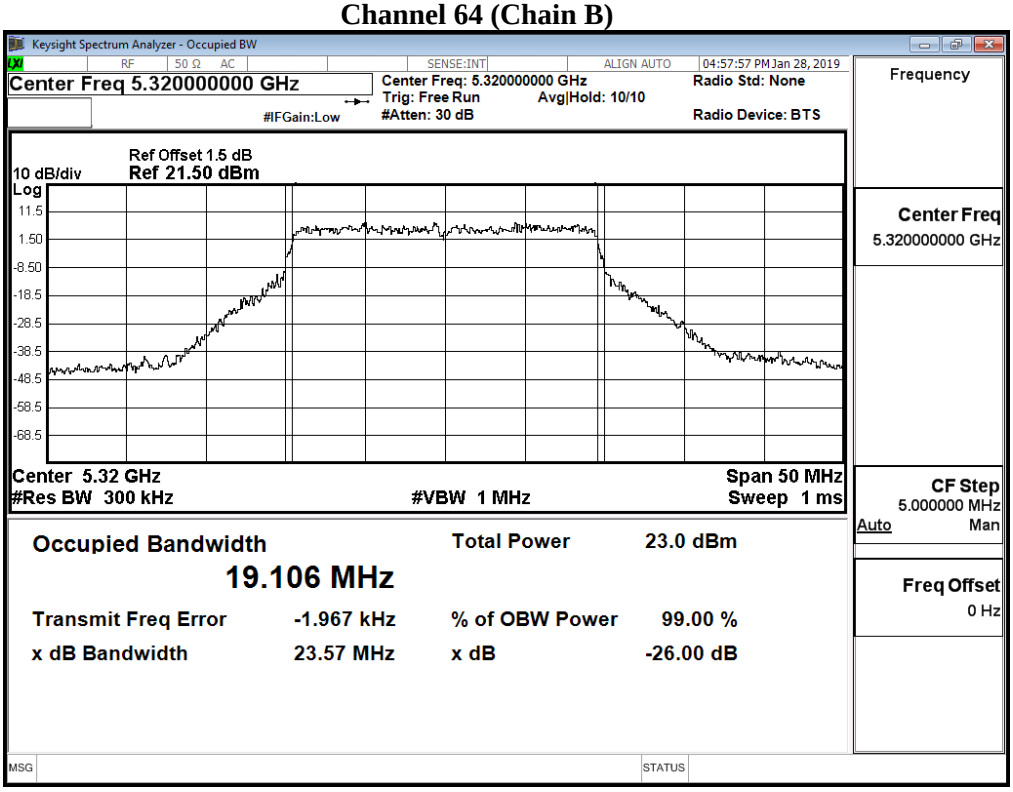

Channel 100 (Chain A)

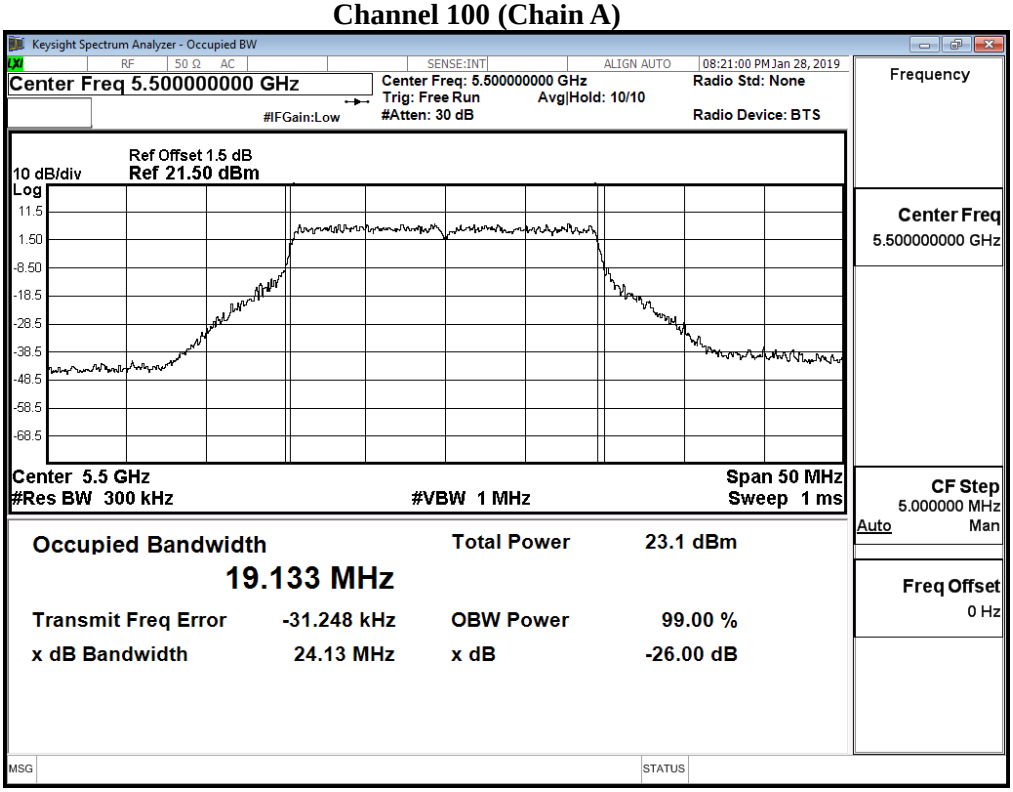

Channel 100 (Chain B)

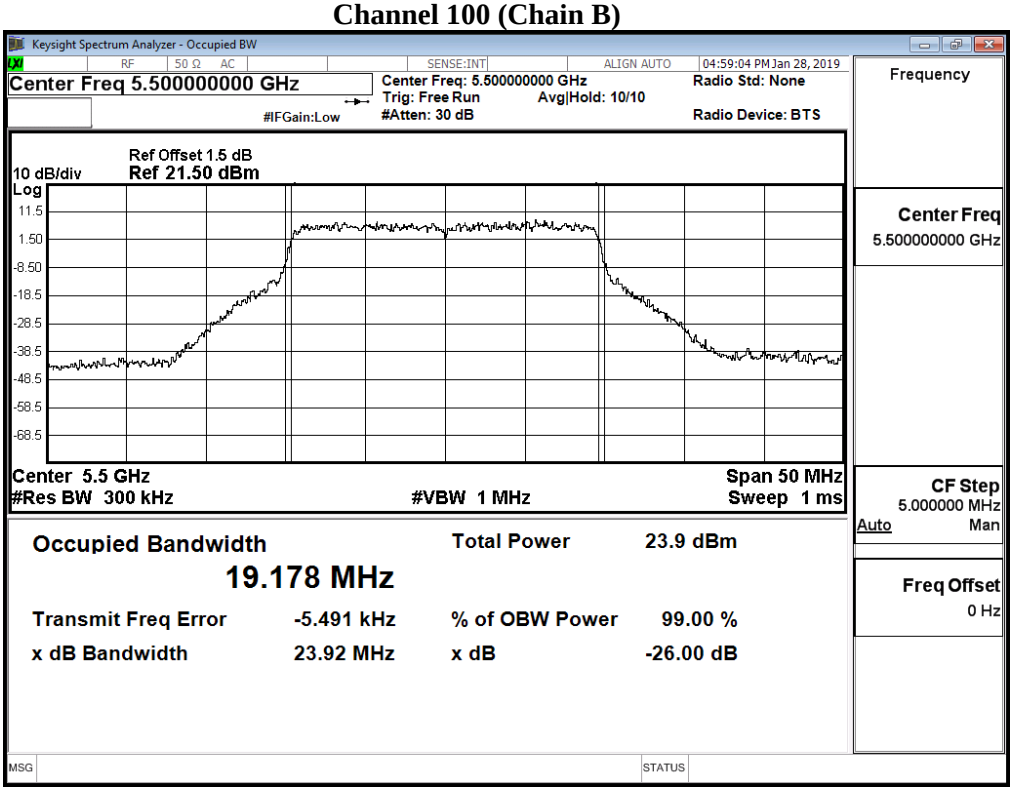

Channel 116 (Chain A)

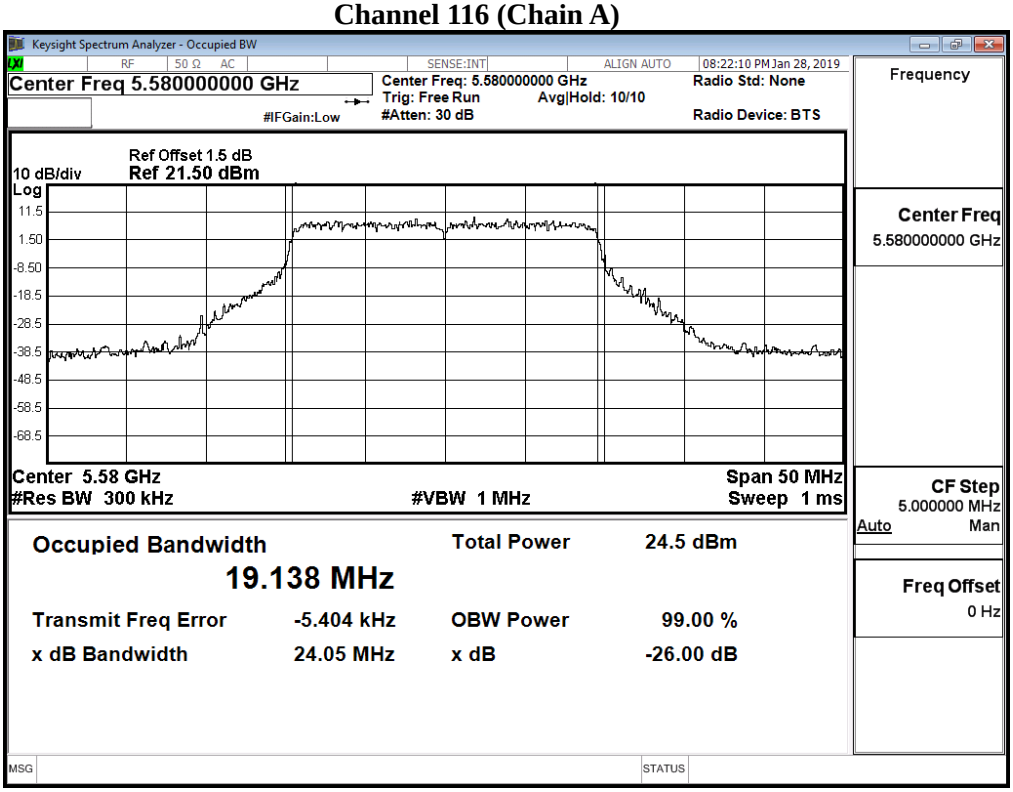

Channel 116 (Chain B)

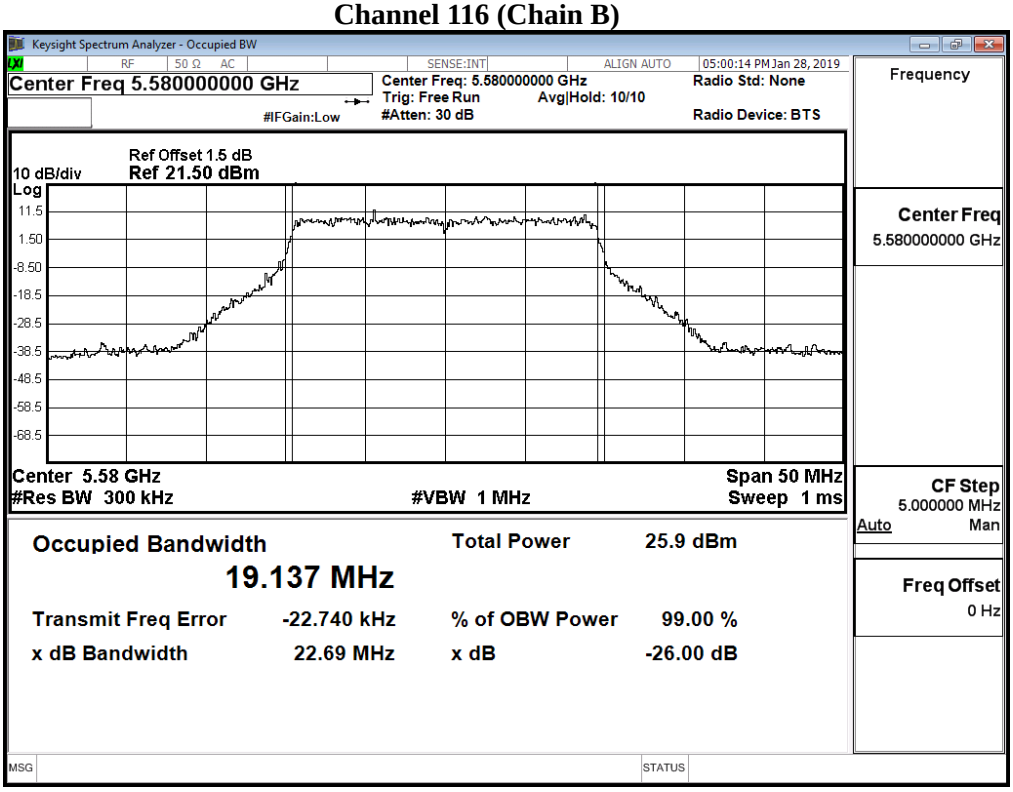

Channel 140 (Chain A)

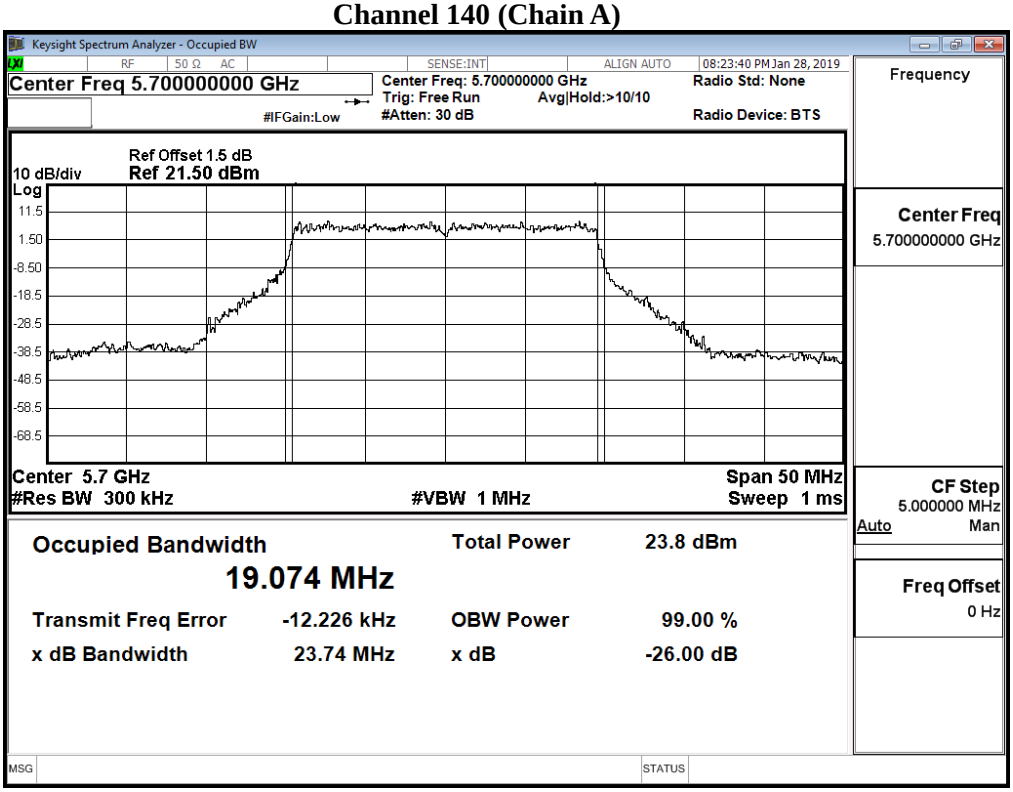

Channel 140 (Chain B)

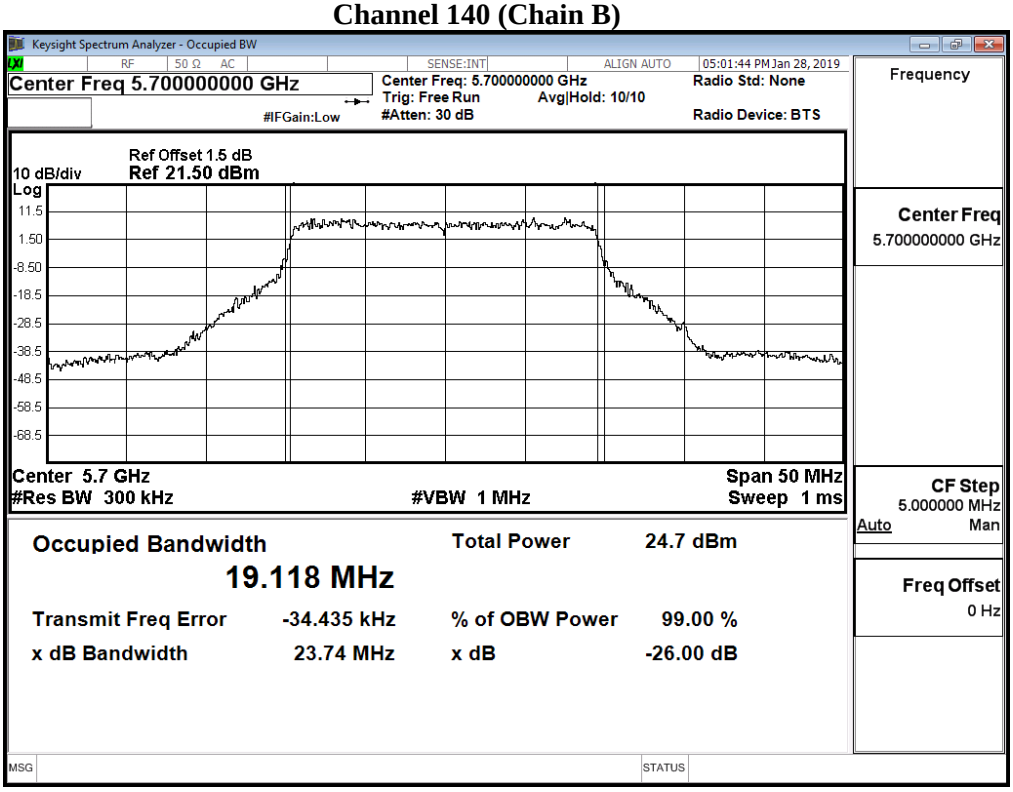

Channel 144 (Chain A)

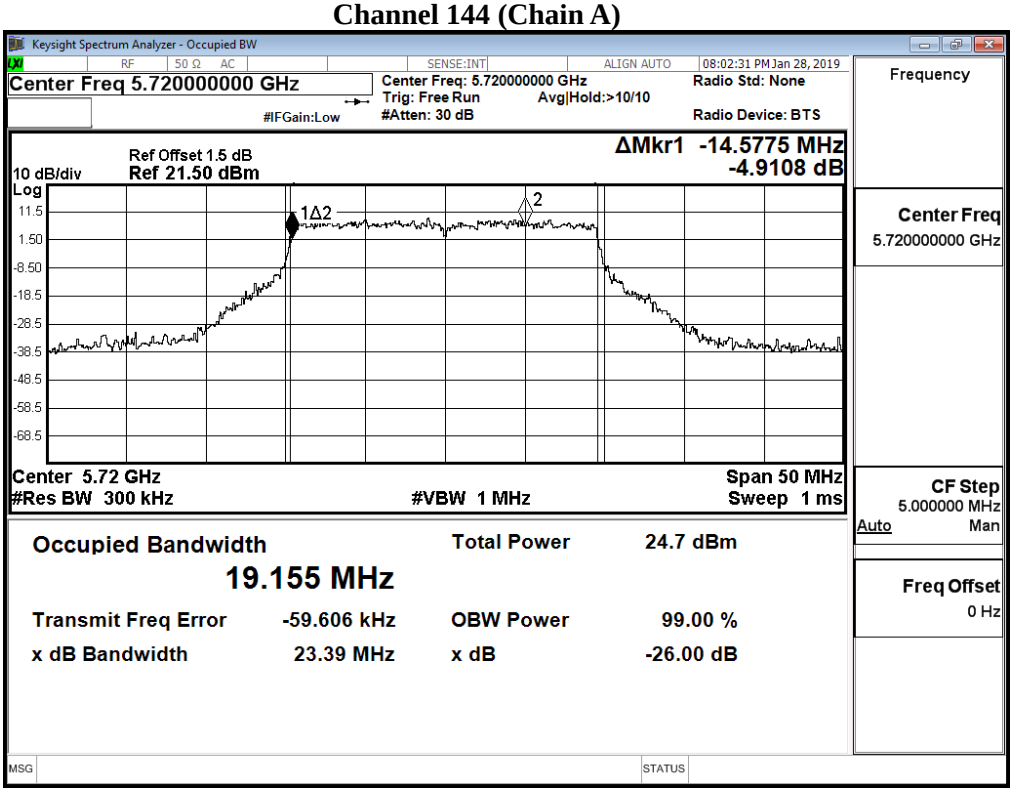

Channel 144 (Chain B)

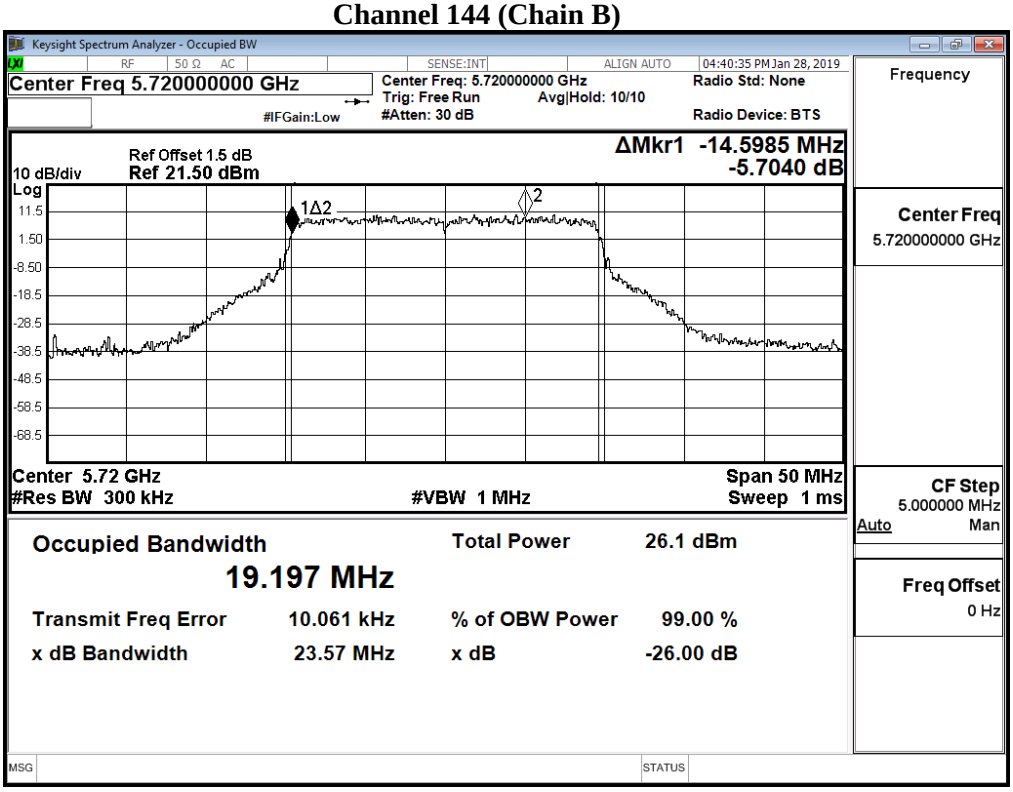

Maximum conducted output power:

Channel 144 (U-NII-2C) (Chain A)

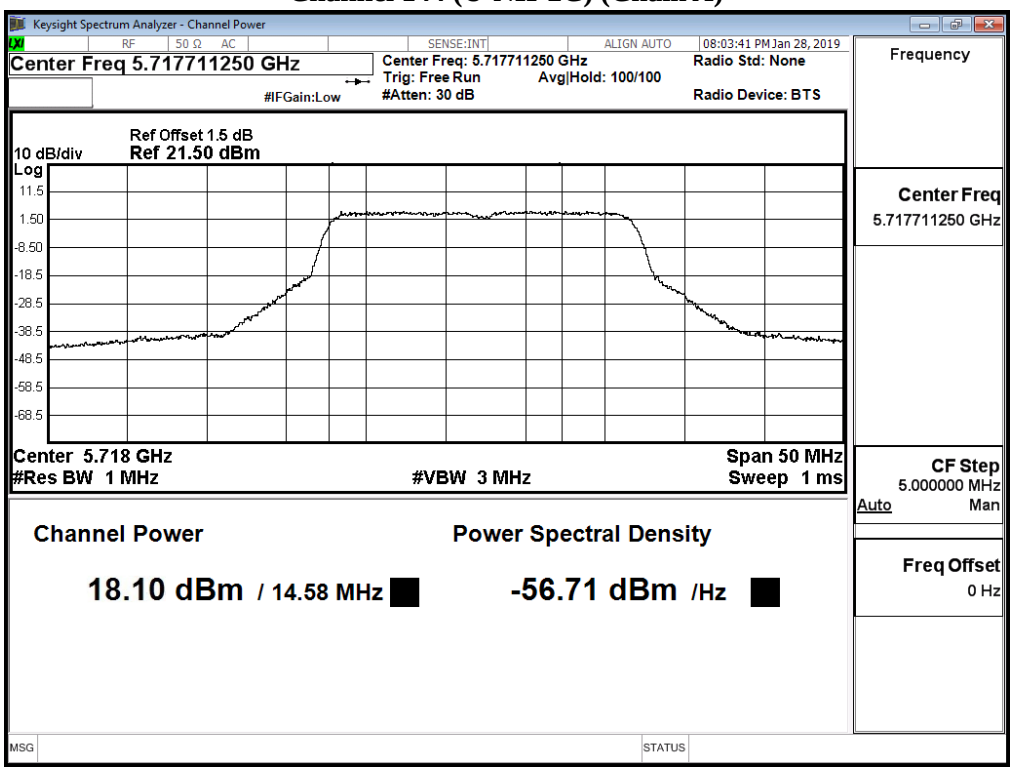

Maximum conducted output power:

Channel 144 (U-NII-3) (Chain A)

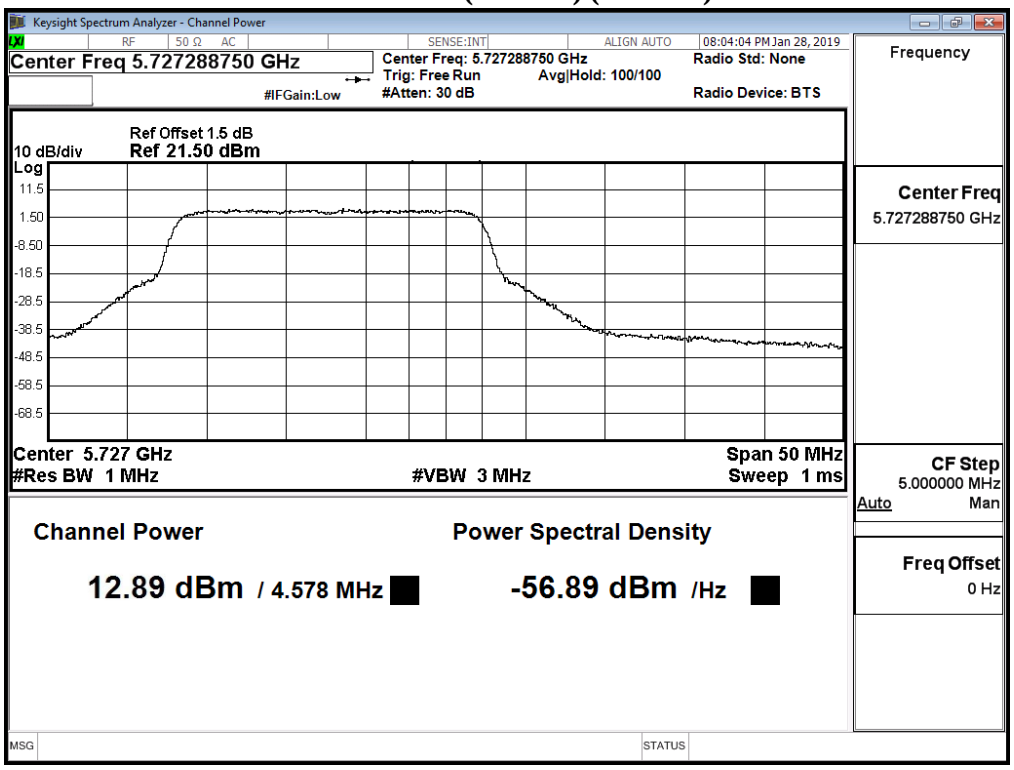

Maximum conducted output power:

Channel 144 (U-NII-2C) (Chain B)

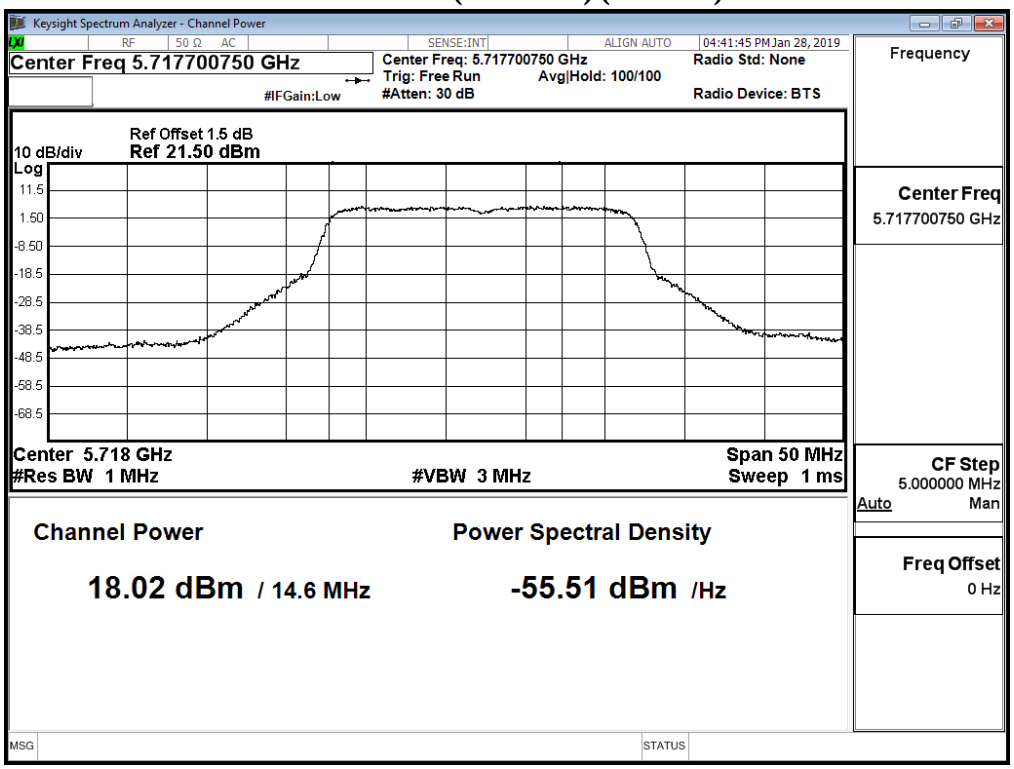

Maximum conducted output power:

Channel 144 (U-NII-3) (Chain B)

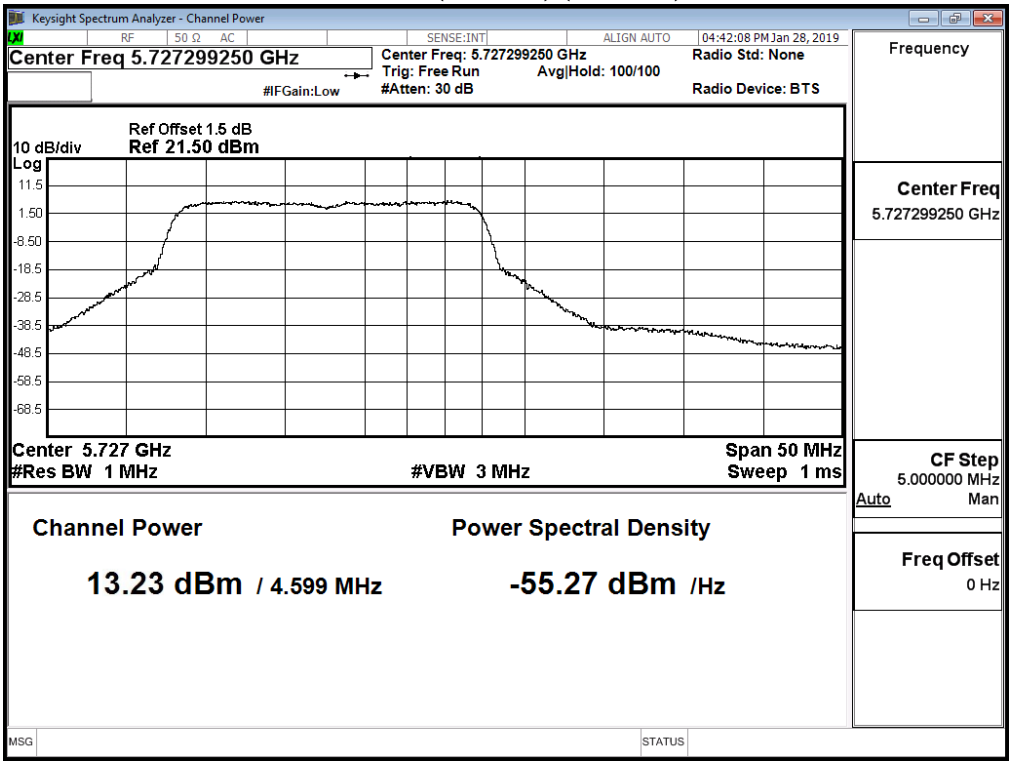

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 3: MIMO: 發射器 802.11ax-40BW
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
38	5190	16.71	--	--	--	--	--	--	--	--	--	--	--
46	5230	18.12	17.96	17.87	17.80	17.65	17.55	17.37	17.31	17.21	17.04	16.90	16.73
54	5270	17.84	--	--	--	--	--	--	--	--	--	--	--
62	5310	14.47	14.38	14.21	14.09	13.94	13.84	13.78	13.71	13.62	13.44	13.30	13.12
102	5510	17.23	--	--	--	--	--	--	--	--	--	--	--
110	5550	18.84	18.67	18.60	18.42	18.36	18.29	18.22	18.15	17.98	17.90	17.74	17.59
134	5670	18.57	--	--	--	--	--	--	--	--	--	--	--
142(U-NII-2C)	5710	18.67	18.56	18.48	18.42	18.32	18.25	18.12	18.06	18.00	17.92	17.75	17.60
142(U-NII-3)	5710	9.23	9.13	9.04	8.91	8.74	8.60	8.50	8.33	8.15	8.00	7.83	7.71
151	5755	19.49	--	--	--	--	--	--	--	--	--	--	--
159	5795	19.17	18.99	18.82	18.69	18.52	18.35	18.17	18.10	17.96	17.79	17.68	17.59

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
38	5190	16.58	--	--	--	--	--	--	--	--	--	--	--
46	5230	17.84	17.72	17.62	17.56	17.41	17.28	17.14	17.01	16.93	16.87	16.80	16.69
54	5270	17.96	--	--	--	--	--	--	--	--	--	--	--
62	5310	14.25	14.16	13.98	13.87	13.78	13.65	13.53	13.38	13.21	13.12	12.97	12.79
102	5510	17.01	--	--	--	--	--	--	--	--	--	--	--
110	5550	18.78	18.66	18.50	18.36	18.23	18.09	17.93	17.77	17.69	17.63	17.56	17.42
134	5670	18.52	--	--	--	--	--	--	--	--	--	--	--
142(U-NII-2C)	5710	18.58	18.49	18.37	18.28	18.14	18.02	17.90	17.73	17.59	17.50	17.38	17.20
142(U-NII-3)	5710	9.32	9.20	9.05	8.98	8.90	8.79	8.65	8.49	8.33	8.25	8.19	8.01
151	5755	19.19	--	--	--	--	--	--	--	--	--	--	--
159	5795	19.01	18.89	18.76	18.67	18.58	18.46	18.34	18.24	18.17	18.02	17.88	17.71

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
38	5190	--	16.71	16.58	19.66	24	--
46	5230	--	18.12	17.84	20.99	24	--
54	5270	37.856	17.84	17.96	20.91	24	26.78
62	5310	37.926	14.47	14.25	17.37	24	26.79
102	5510	37.905	17.23	17.01	20.13	24	26.79
110	5550	37.945	18.84	18.78	21.82	24	26.79
134	5670	37.875	18.57	18.52	21.56	24	26.78
142(U-NII-2C)	5710	33.973	18.67	18.58	21.64	24	26.31
142(U-NII-3)	5710	--	9.23	9.32	12.29	30	--
151	5755	--	19.49	19.19	22.35	30	--
159	5795	--	19.17	19.01	22.10	30	--

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:

Channel 54 (Chain A)

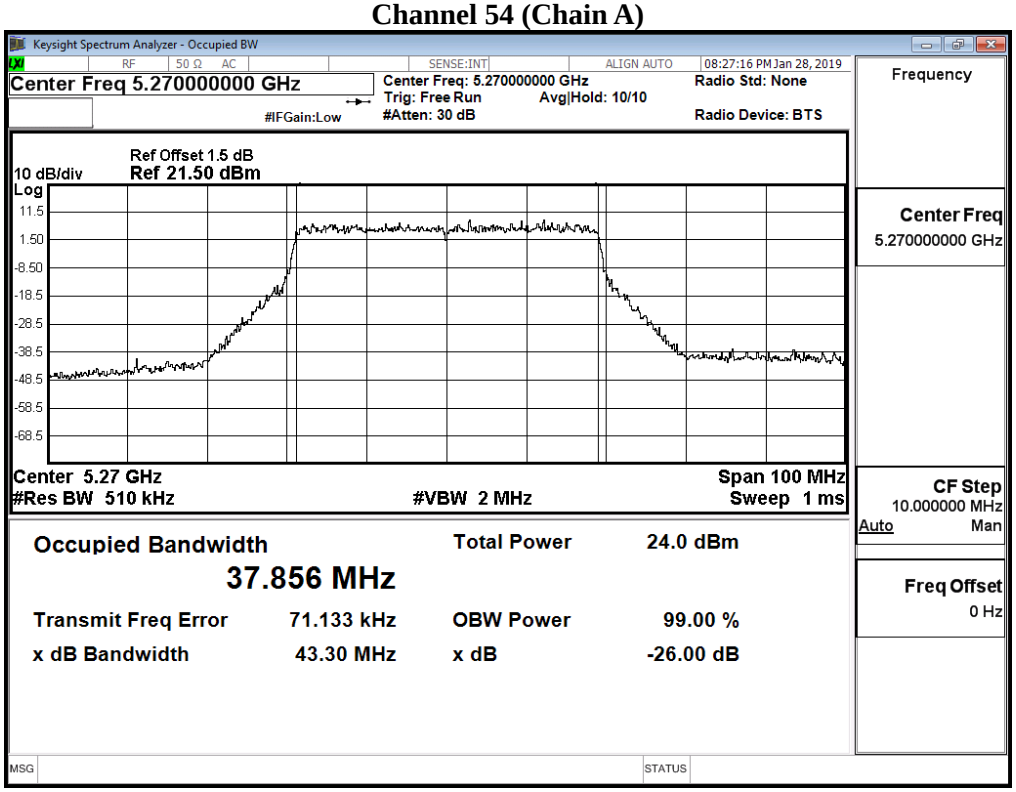

Channel 54 (Chain B)

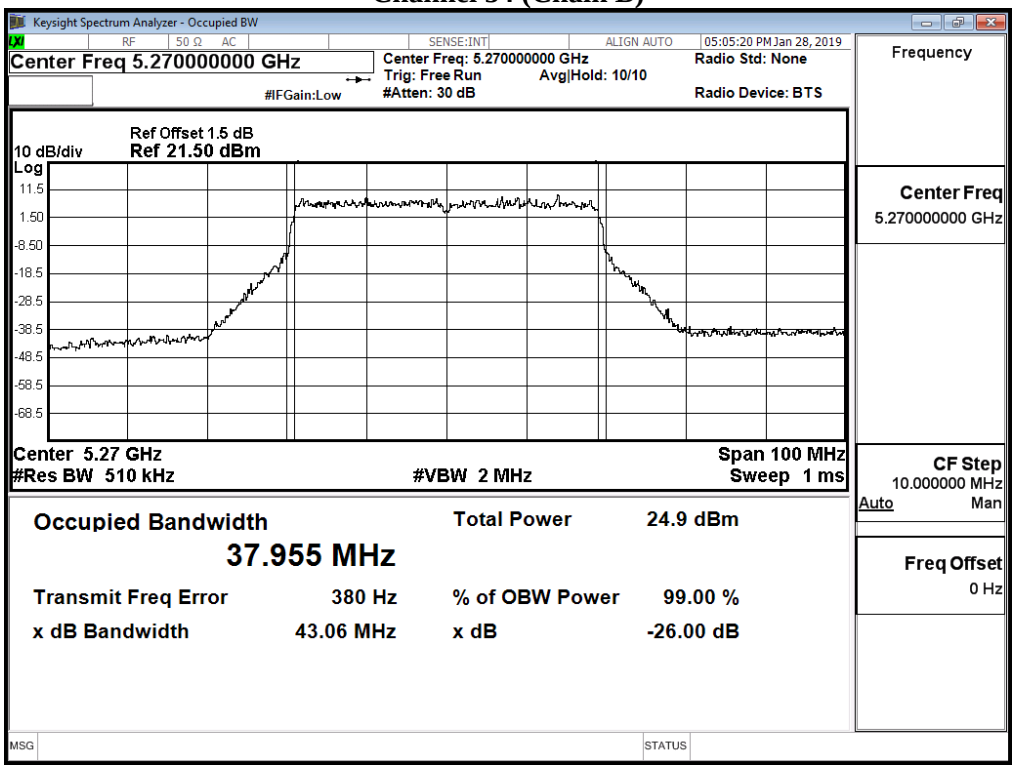

Channel 62 (Chain A)

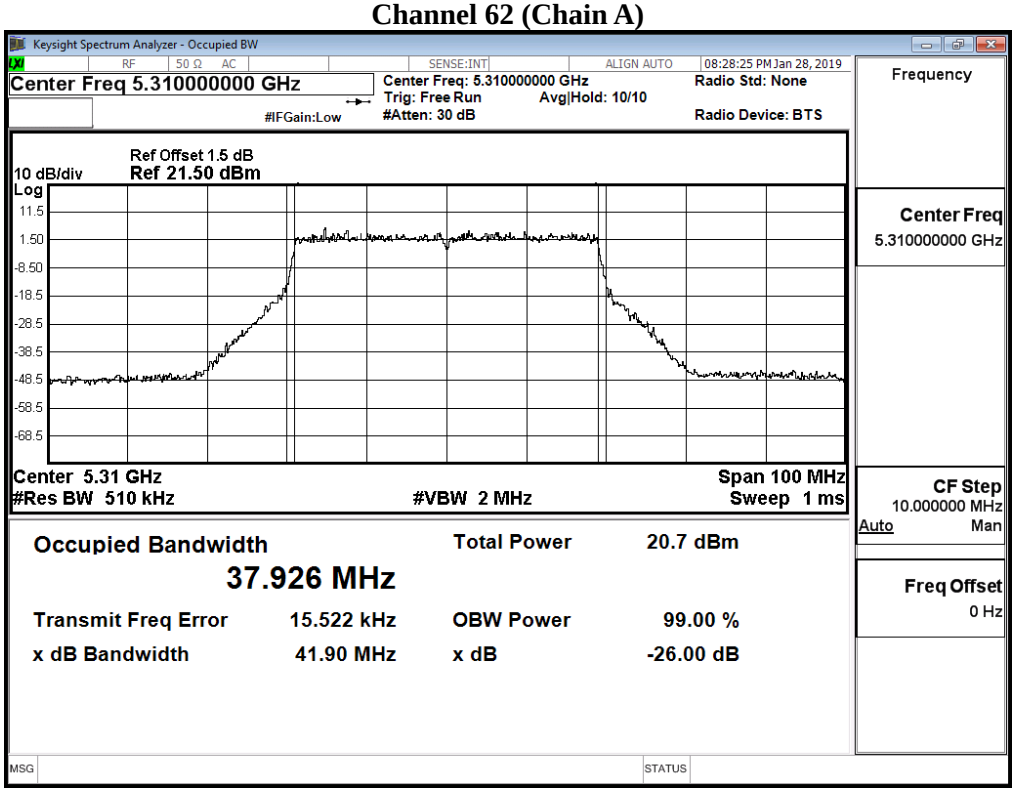

Channel 62 (Chain B)

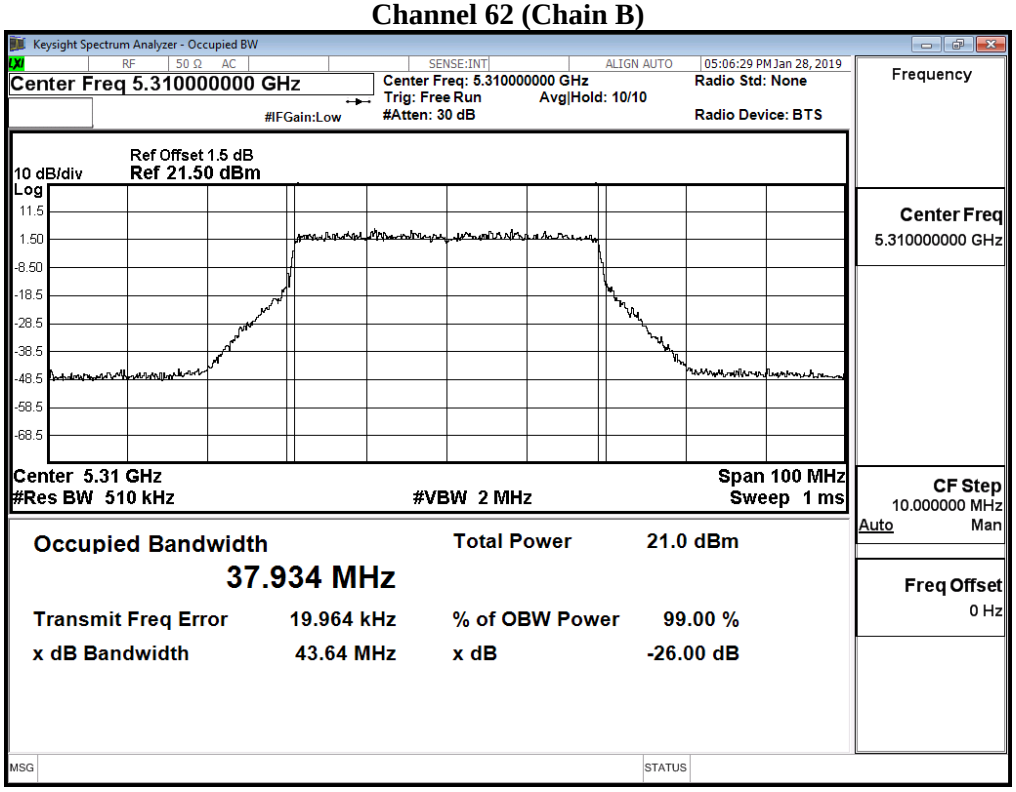

Channel 102 (Chain A)

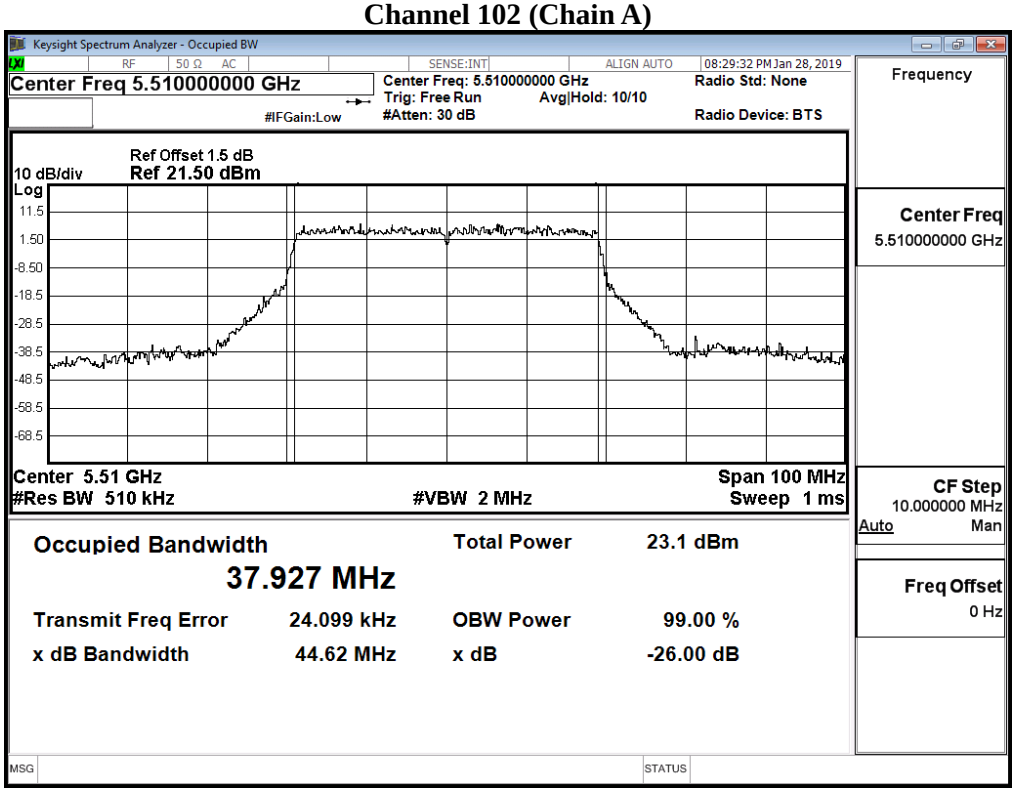

Channel 102 (Chain B)

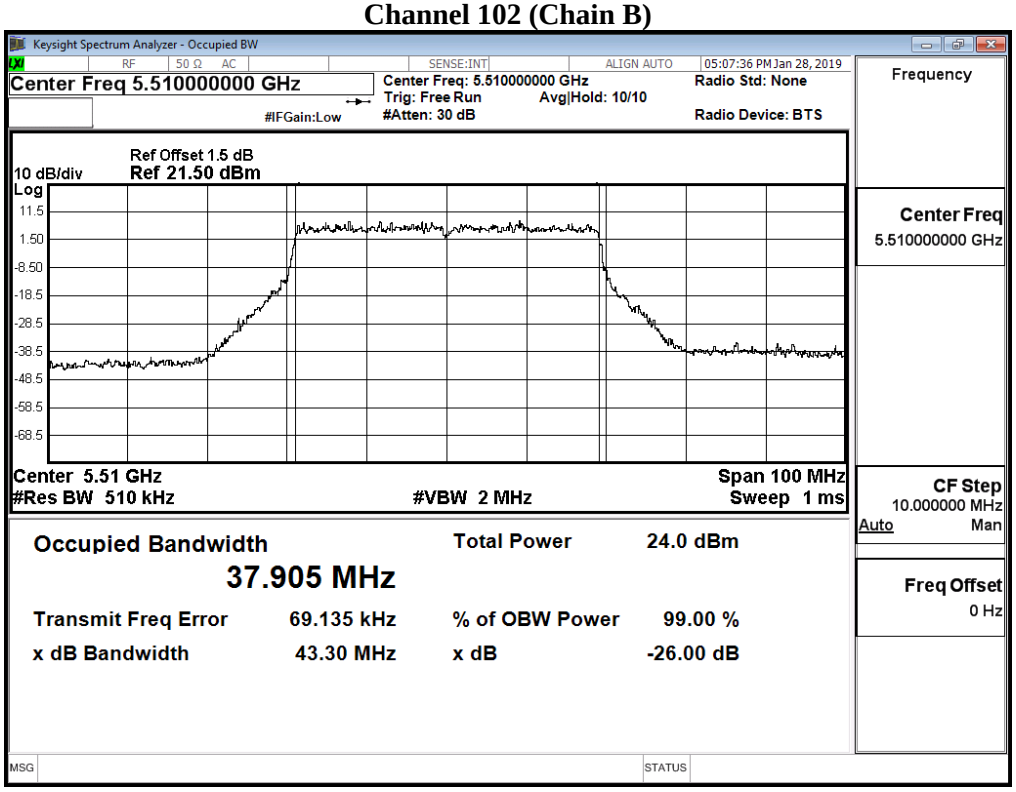

Channel 110 (Chain A)

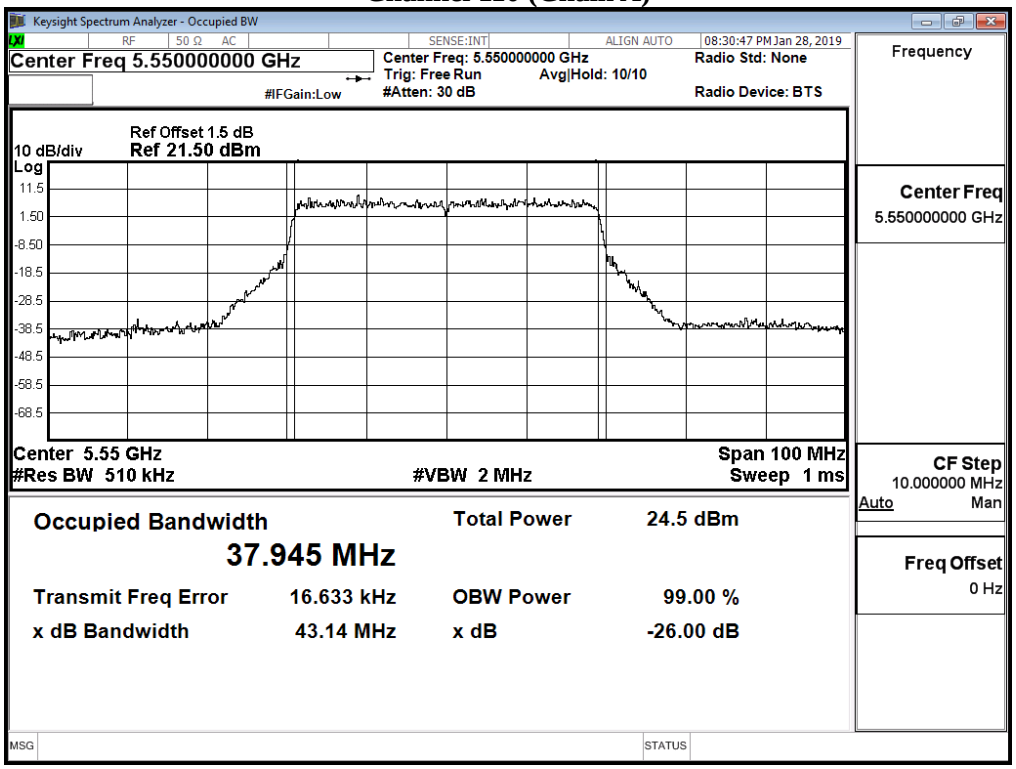

Channel 110 (Chain B)

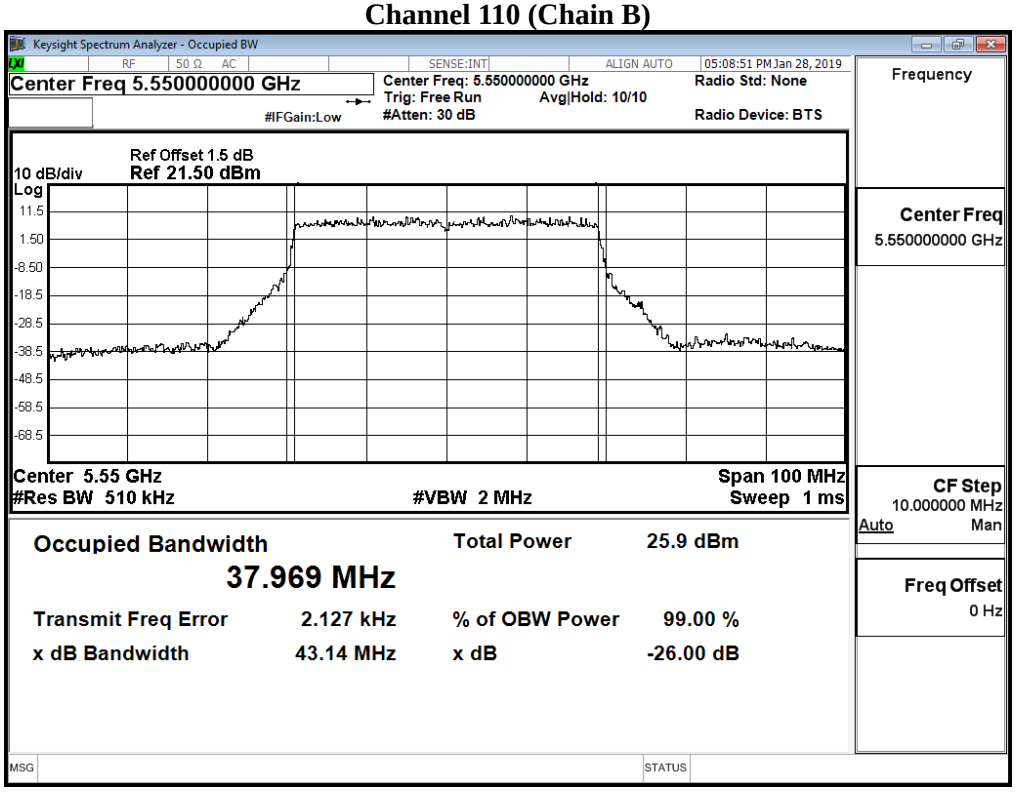

Channel 134 (Chain A)

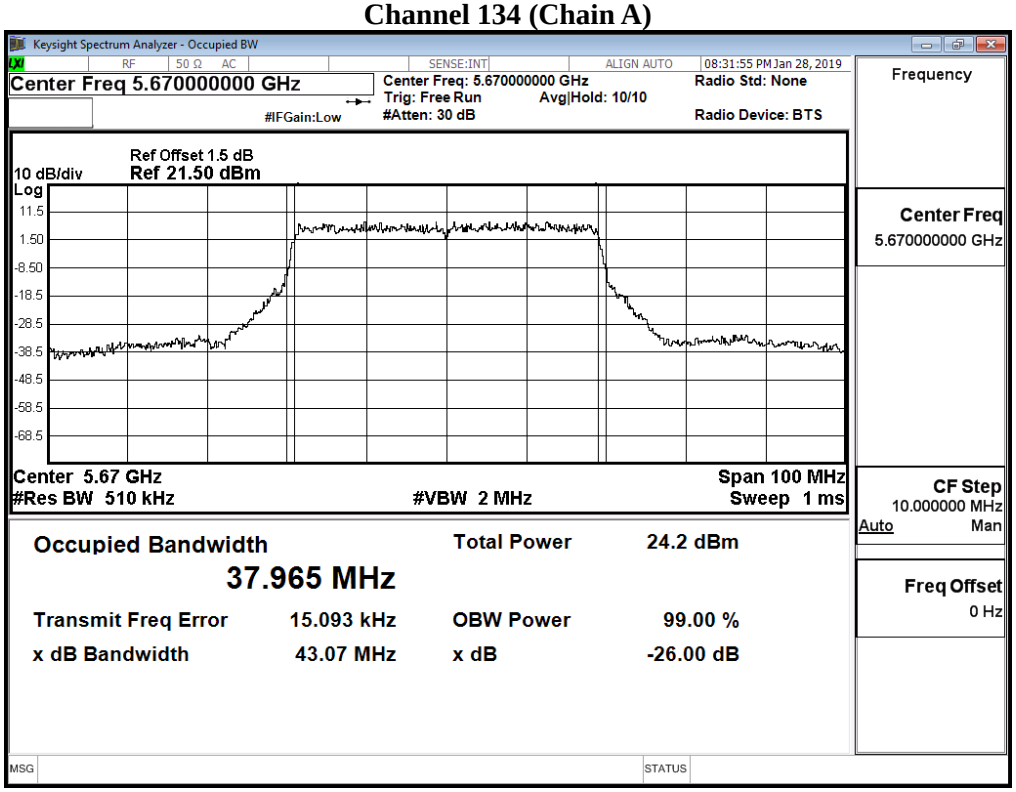

Channel 134 (Chain B)

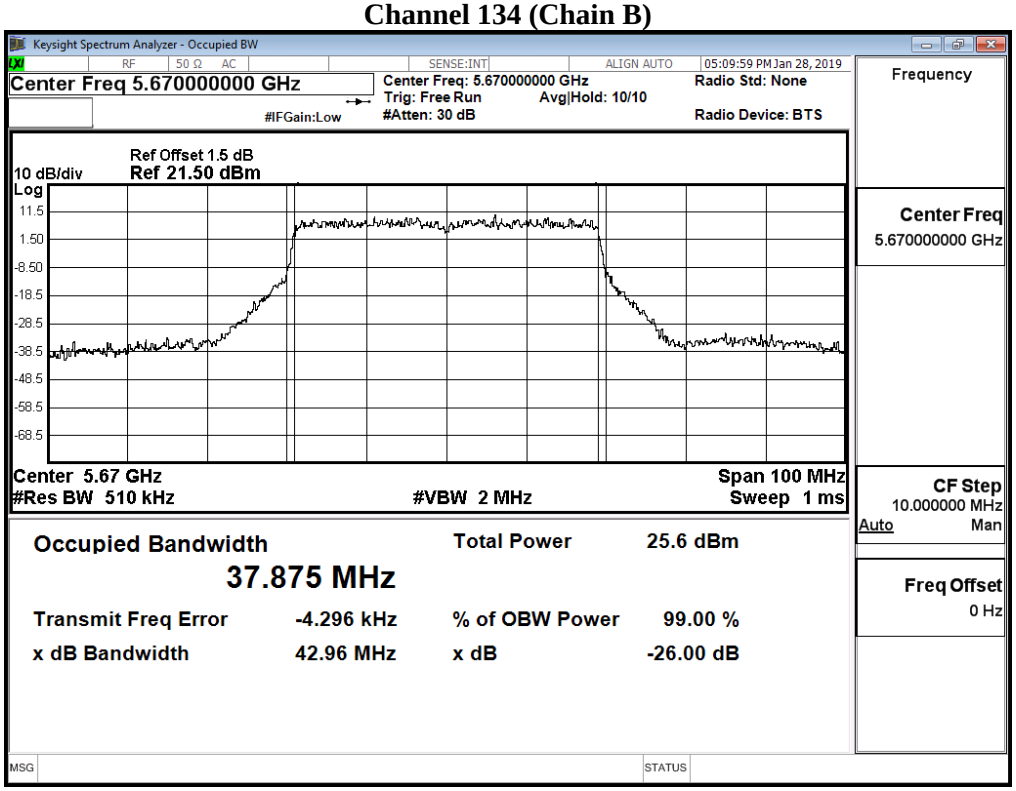

Channel 142 (Chain A)

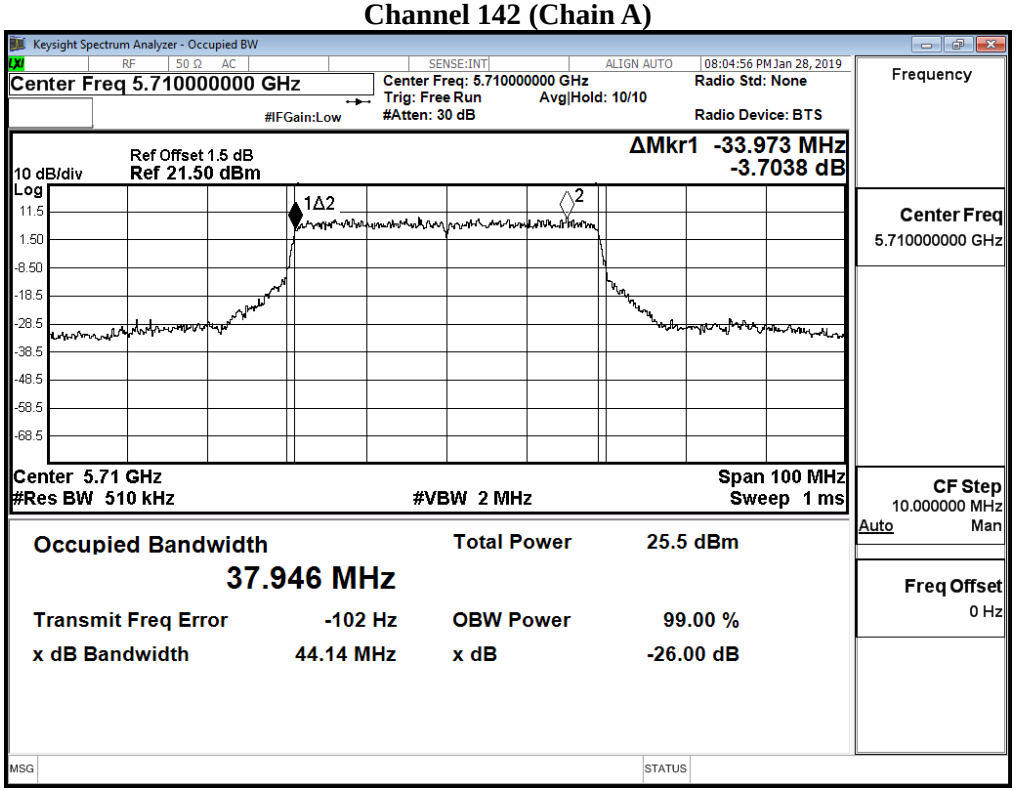

Channel 142 (Chain B)

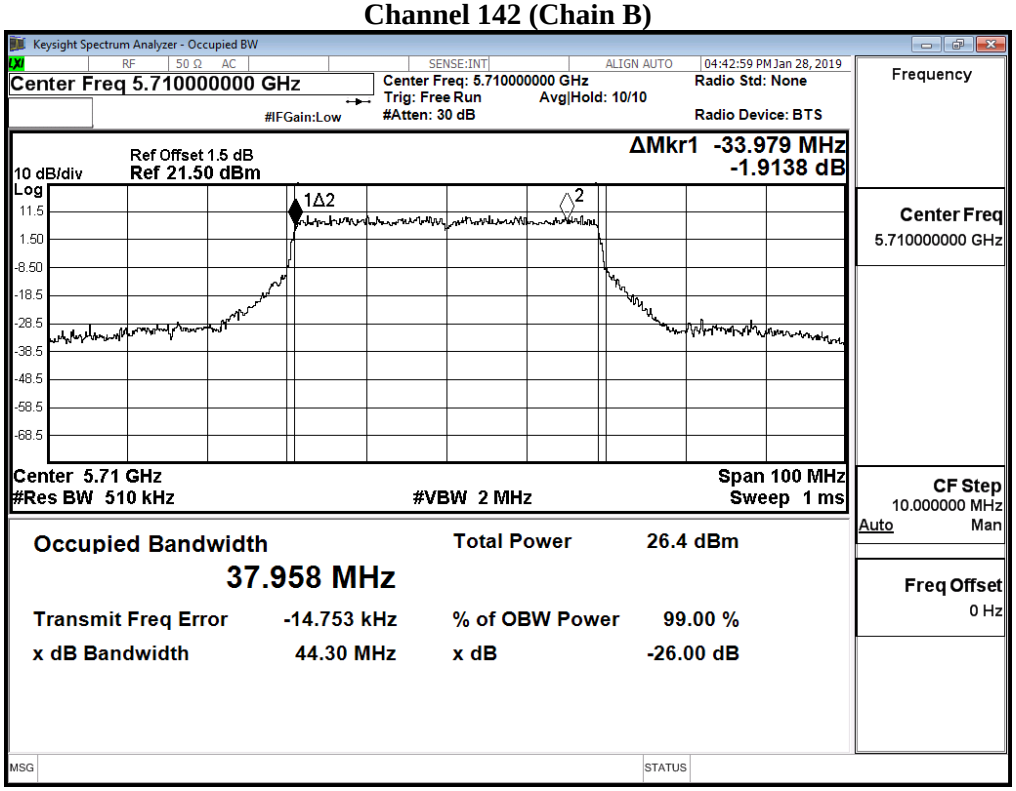

Maximum conducted output power:

Channel 142(U-NII-2C) (Chain A)

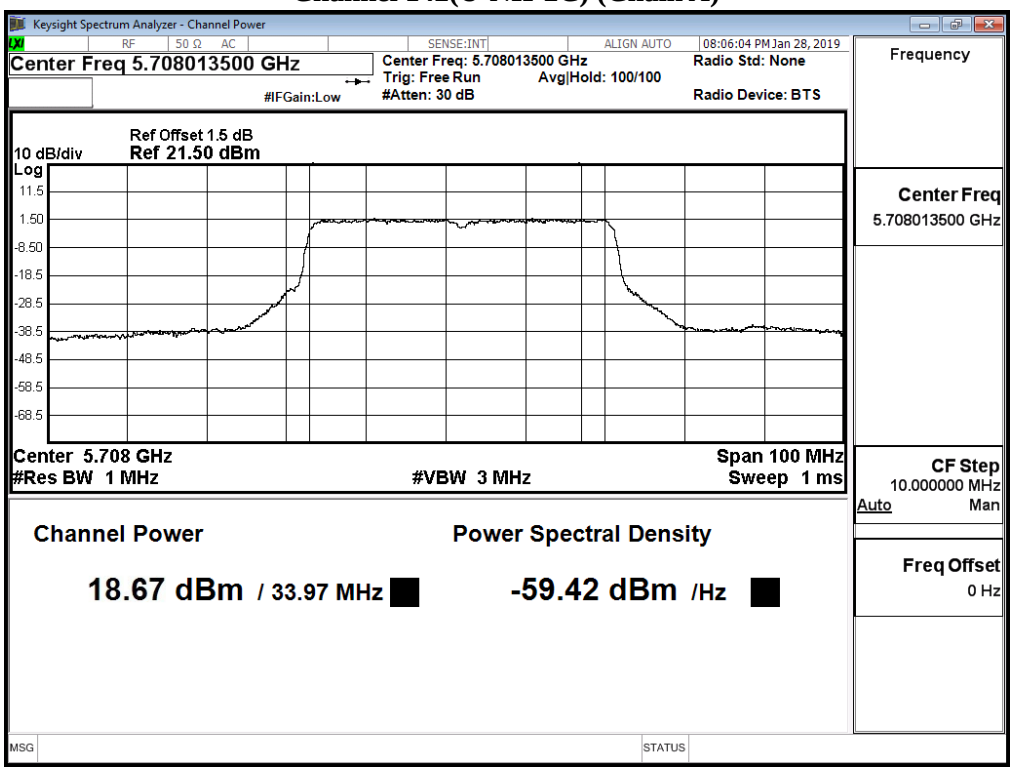

Maximum conducted output power:

Channel 142(U-NII-3) (Chain A)

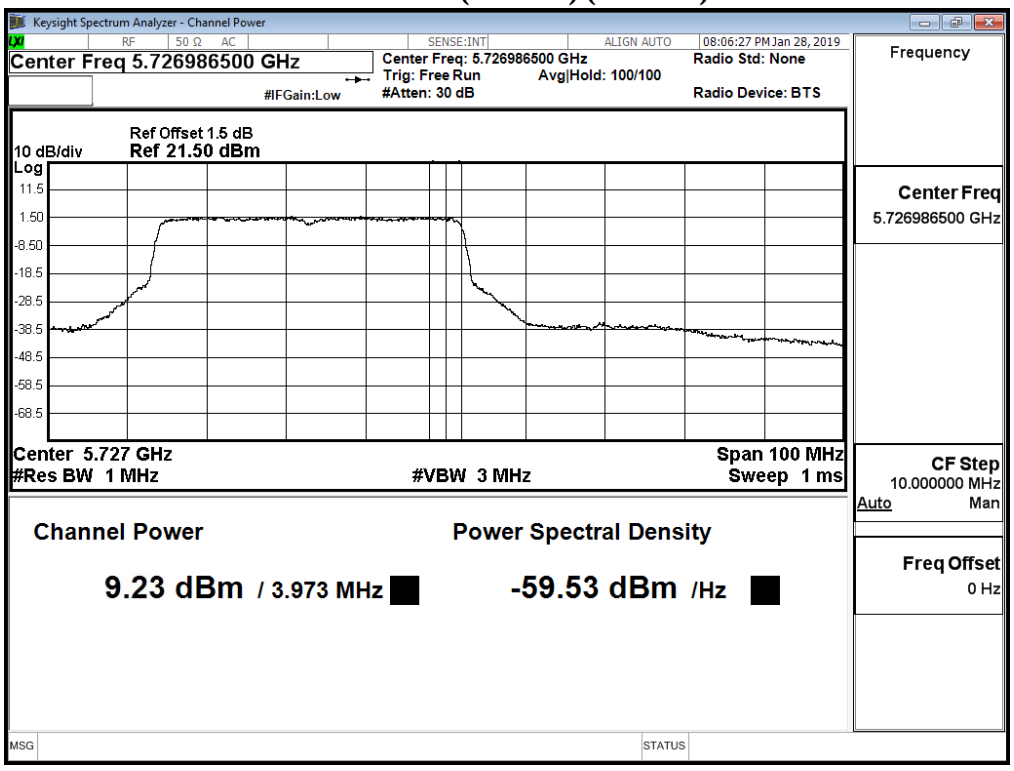

Maximum conducted output power:

Channel 142(U-NII-2C) (Chain B)

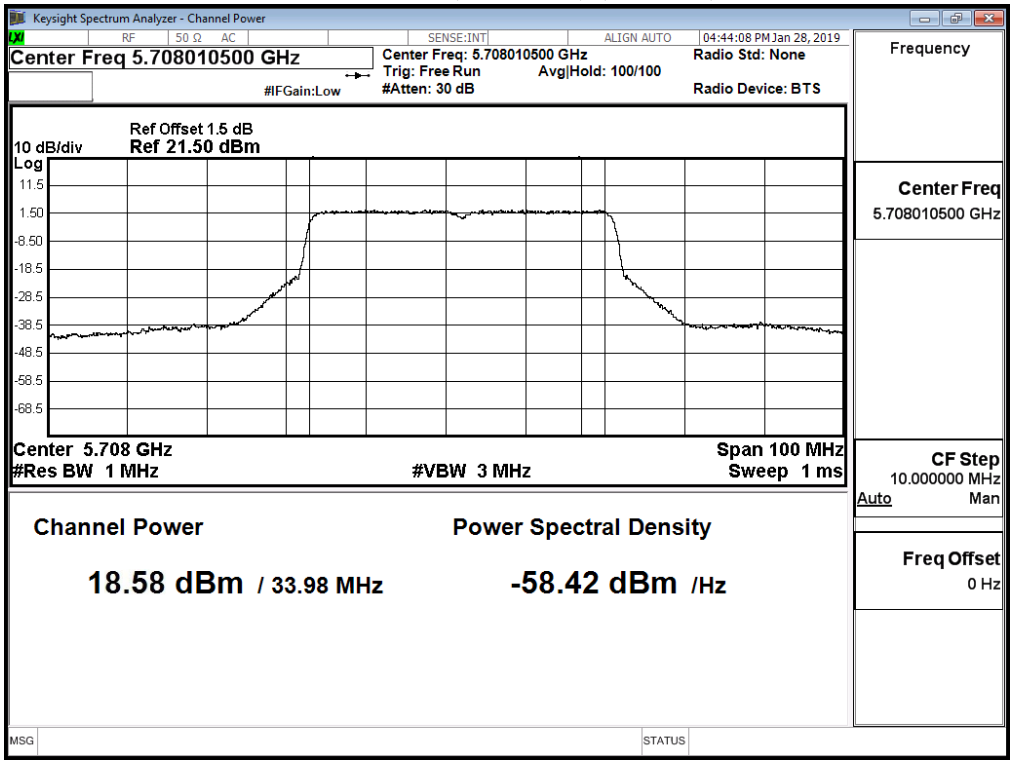

Maximum conducted output power:

Channel 142(U-NII-3) (Chain B)

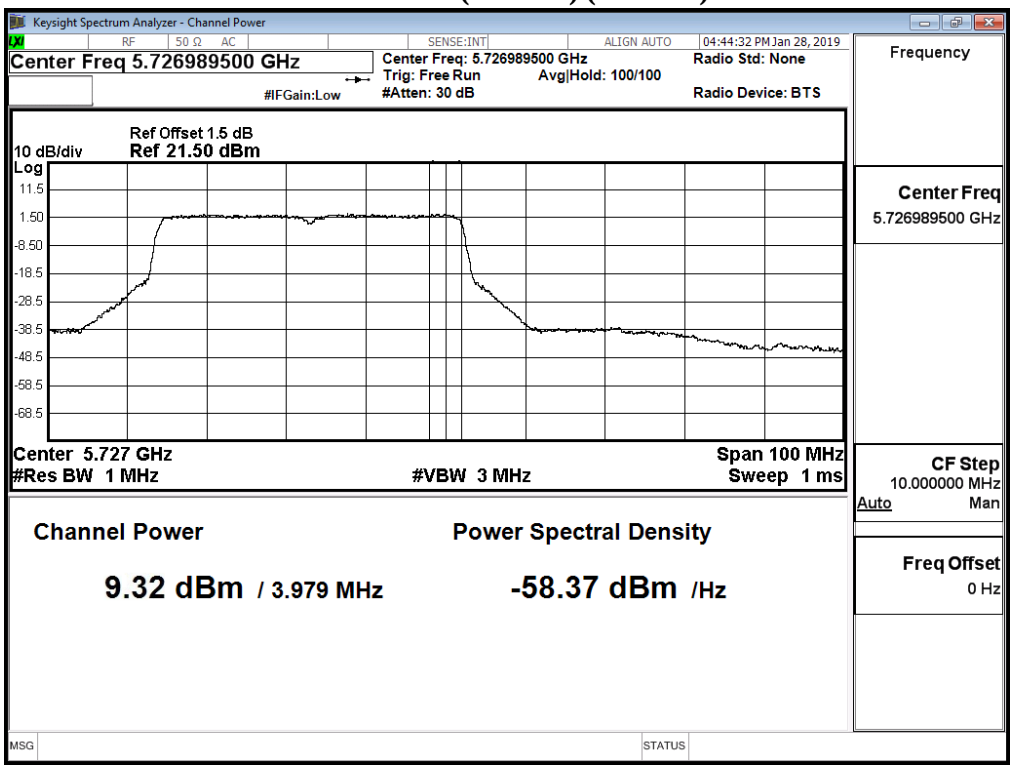

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 3: MIMO: 發射器 802.11ax-80BW
6 dB 頻寬：1MHz　　視頻頻寬：3MHz
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
42	5210	16.60	16.51	16.36	16.27	16.18	16.10	15.96	15.79	15.63	15.47	15.36	15.29
58	5290	15.56	15.43	15.37	15.30	15.15	15.02	14.92	14.77	14.63	14.51	14.41	14.29
106	5530	16.85	--	--	--	--	--	--	--	--	--	--	--
122	5610	18.18	18.01	17.83	17.75	17.61	17.45	17.29	17.14	16.97	16.87	16.71	16.55
138 (U-NII-2C)	5690	19.3	--	--	--	--	--	--	--	--	--	--	--
138 (U-NII-3)	5690	3.46	--	--	--	--	--	--	--	--	--	--	--
155	5775	17.95	17.84	17.69	17.63	17.45	17.35	17.29	17.17	16.99	16.88	16.72	16.65

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
42	5210	16.63	16.51	16.44	16.37	16.25	16.12	16.04	15.91	15.82	15.68	15.51	15.42
58	5290	15.87	15.72	15.56	15.38	15.28	15.21	15.14	15.07	14.93	14.87	14.74	14.61
106	5530	16.83	--	--	--	--	--	--	--	--	--	--	--
122	5610	18.29	18.20	18.08	18.01	17.85	17.75	17.69	17.56	17.47	17.40	17.23	17.17
138 (U-NII-2C)	5690	19.25	--	--	--	--	--	--	--	--	--	--	--
138 (U-NII-3)	5690	3.49	--	--	--	--	--	--	--	--	--	--	--
155	5775	17.66	17.51	17.40	17.23	17.07	16.99	16.84	16.74	16.64	16.56	16.43	16.36

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
42	5210	--	16.600	16.630	19.63	24	--
58	5290	76.719	15.560	15.870	18.73	24	29.85
106	5530	76.720	16.850	16.830	19.85	24	29.85
122	5610	76.691	18.180	18.290	21.25	24	29.85
138 (U-NII-2C)	5690	73.335	19.300	19.250	22.29	24	29.65
138 (U-NII-3)	5690	--	3.460	3.490	6.49	30	--
155	5775	--	17.950	17.660	20.82	30	--

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:

Channel 58 (Chain A)

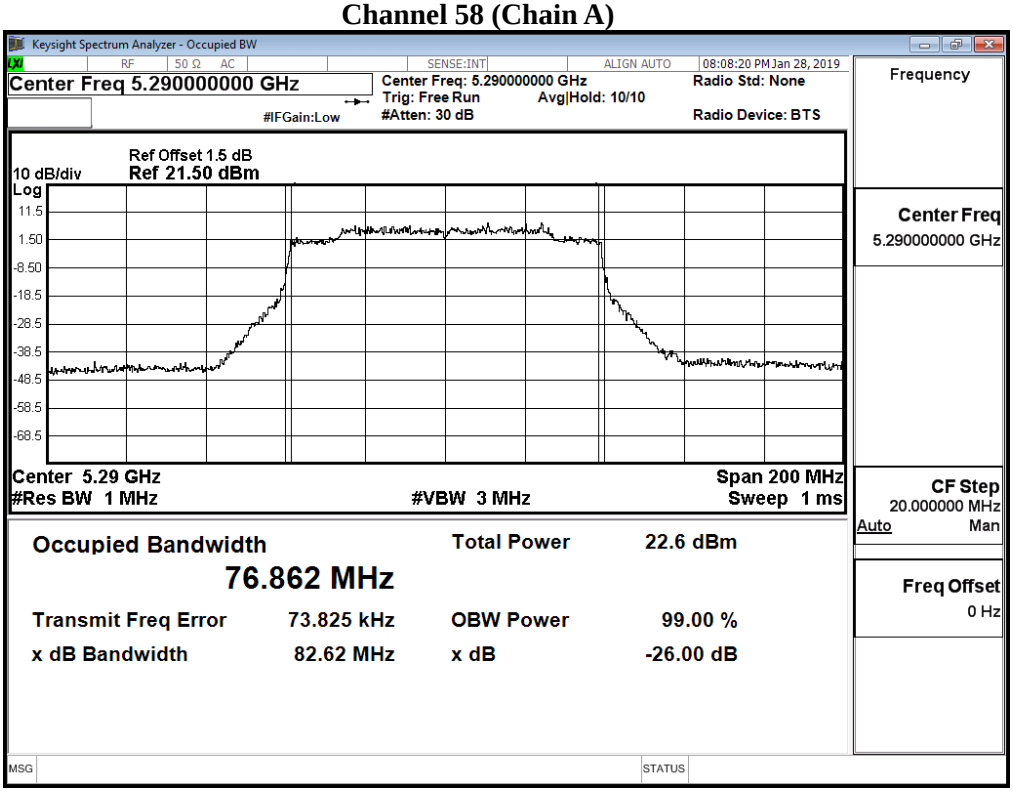

Channel 58 (Chain B)

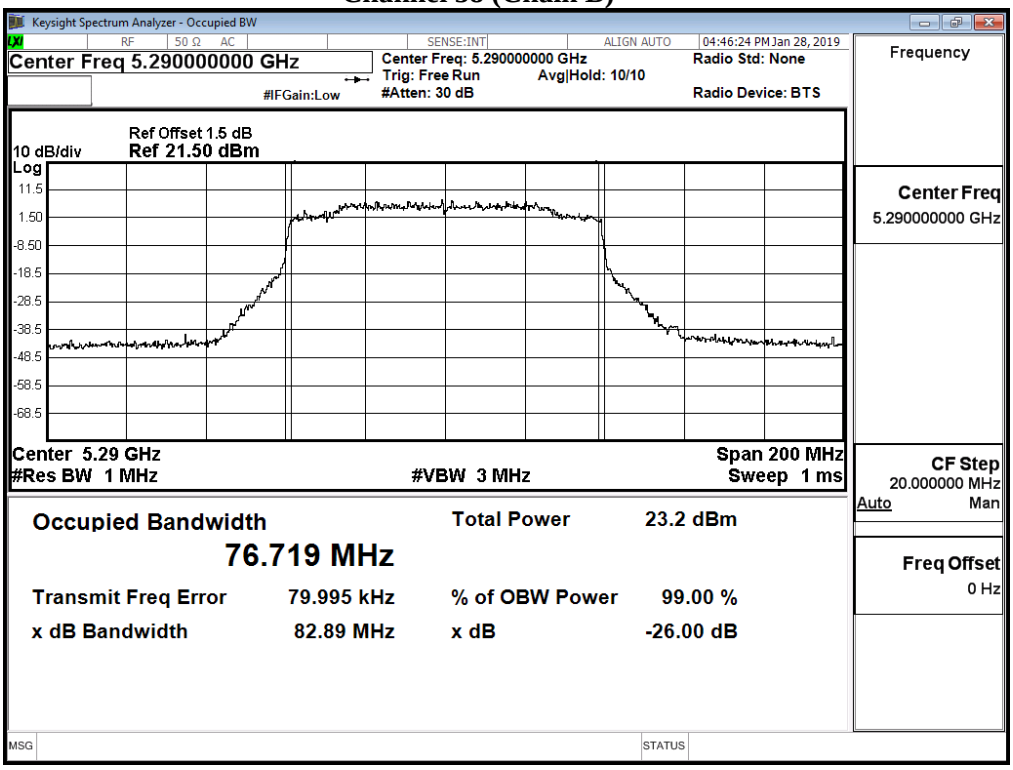

Channel 106 (Chain A)

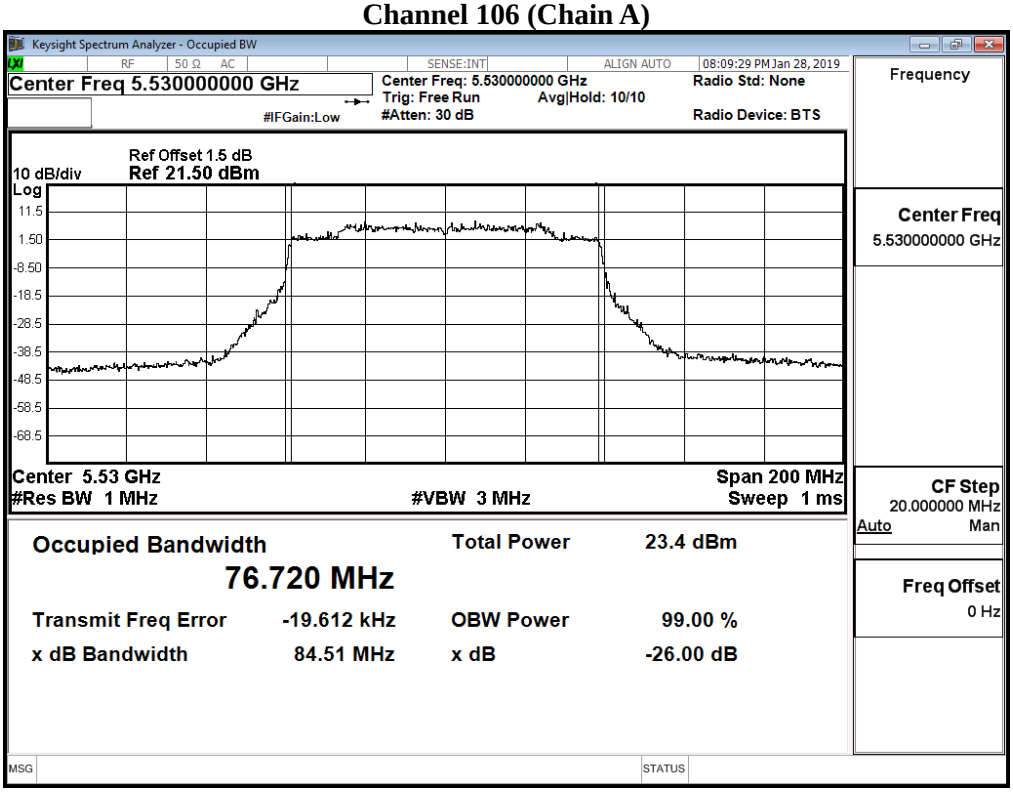

Channel 106 (Chain B)

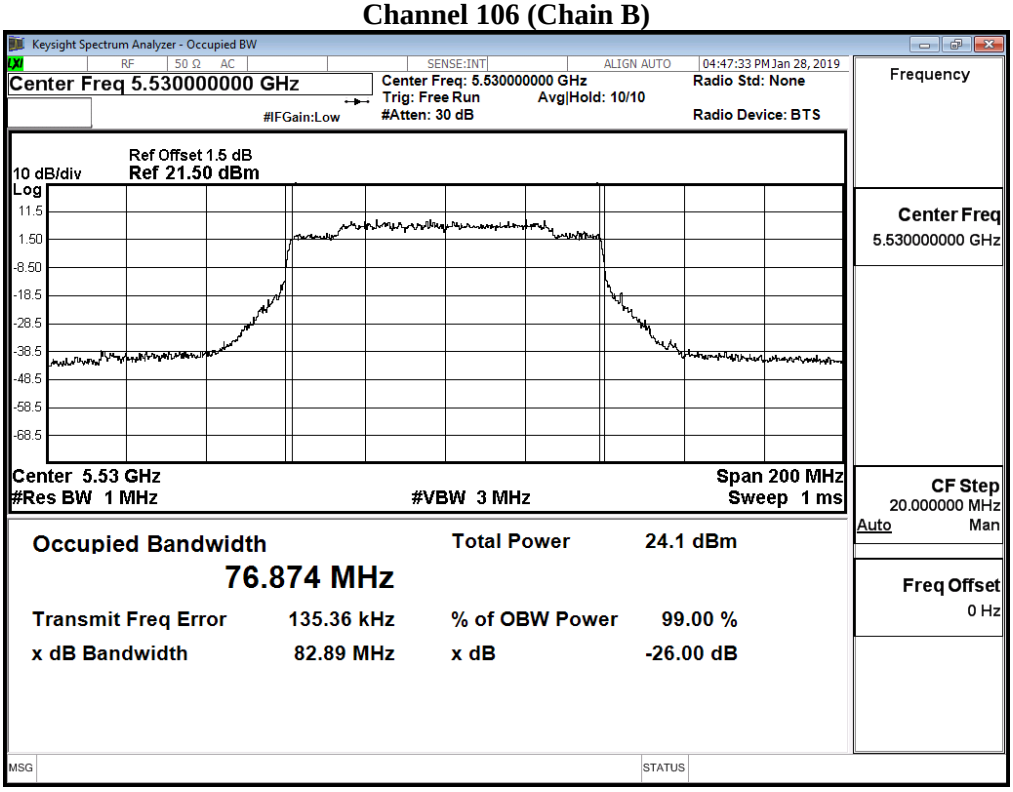

Channel 122 (Chain A)

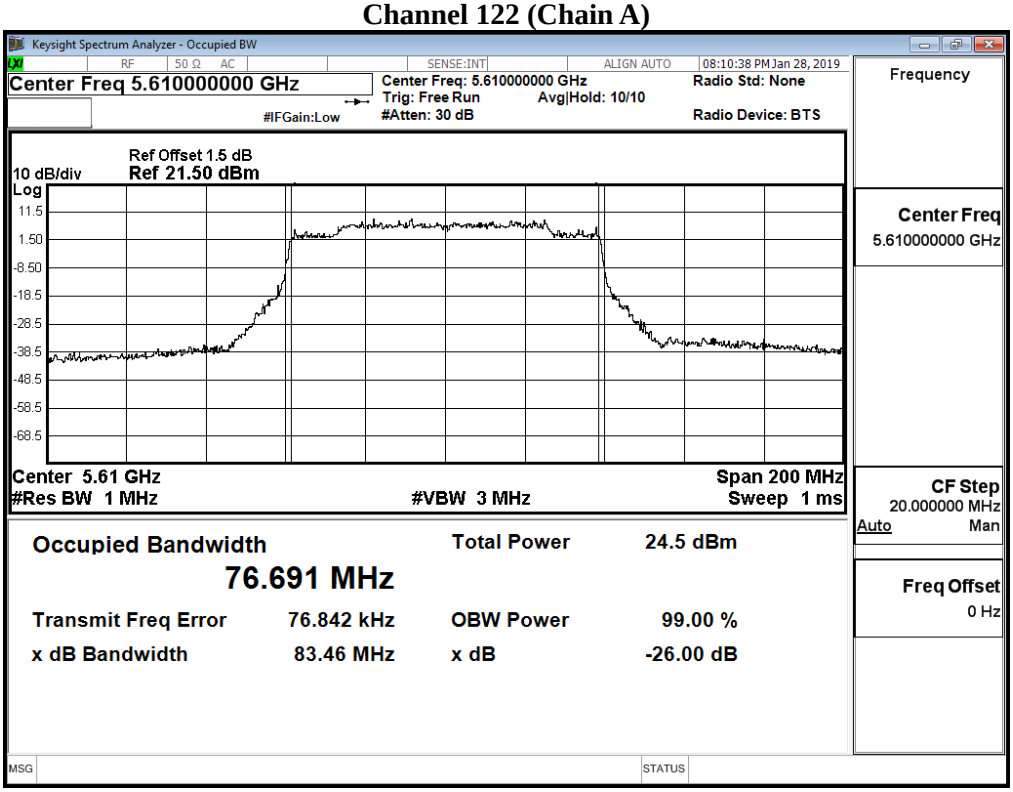

Channel 122 (Chain B)

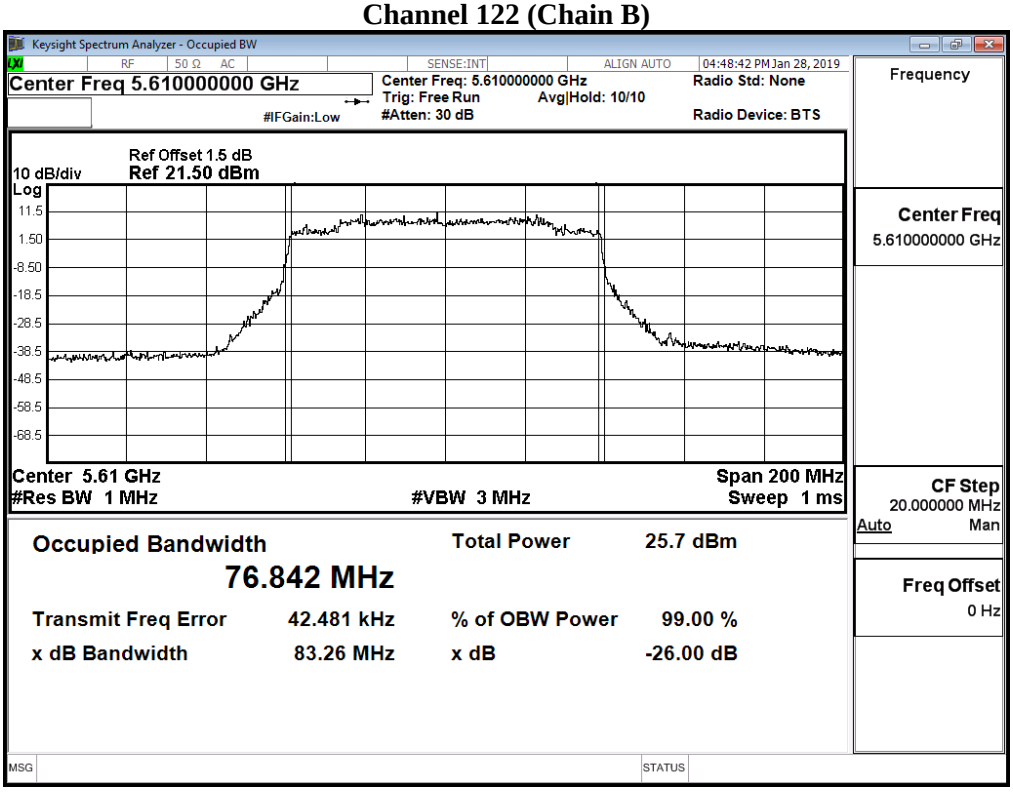

Channel 138 (Chain A)

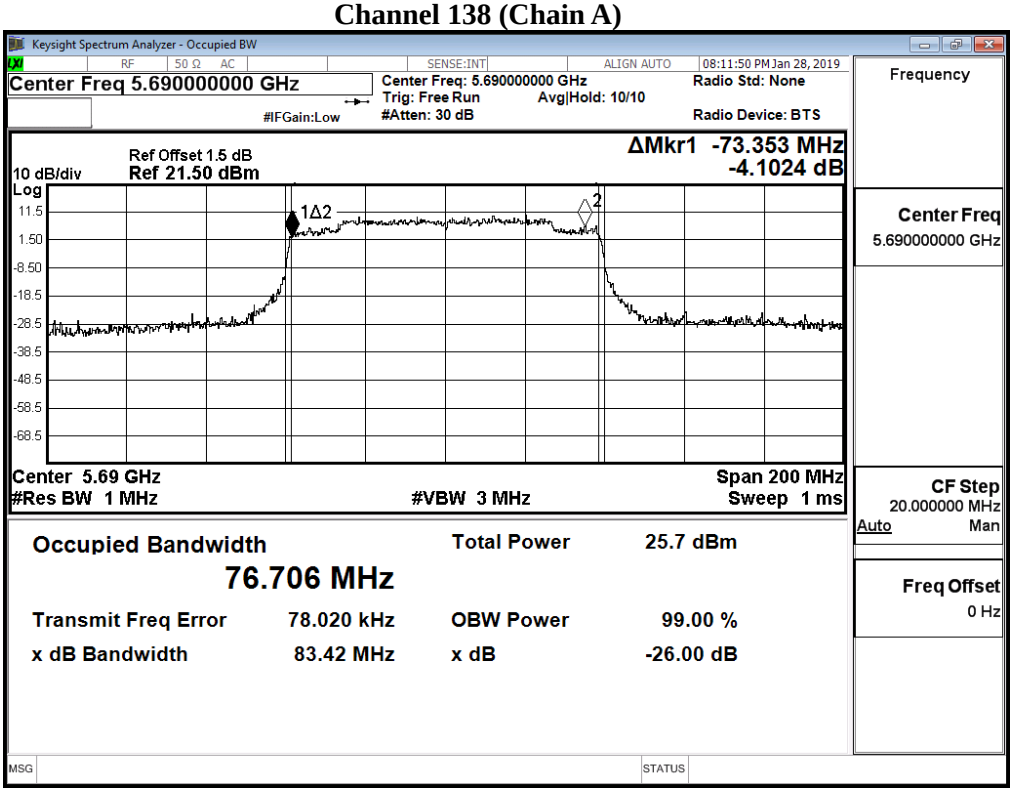

Channel 138 (Chain B)

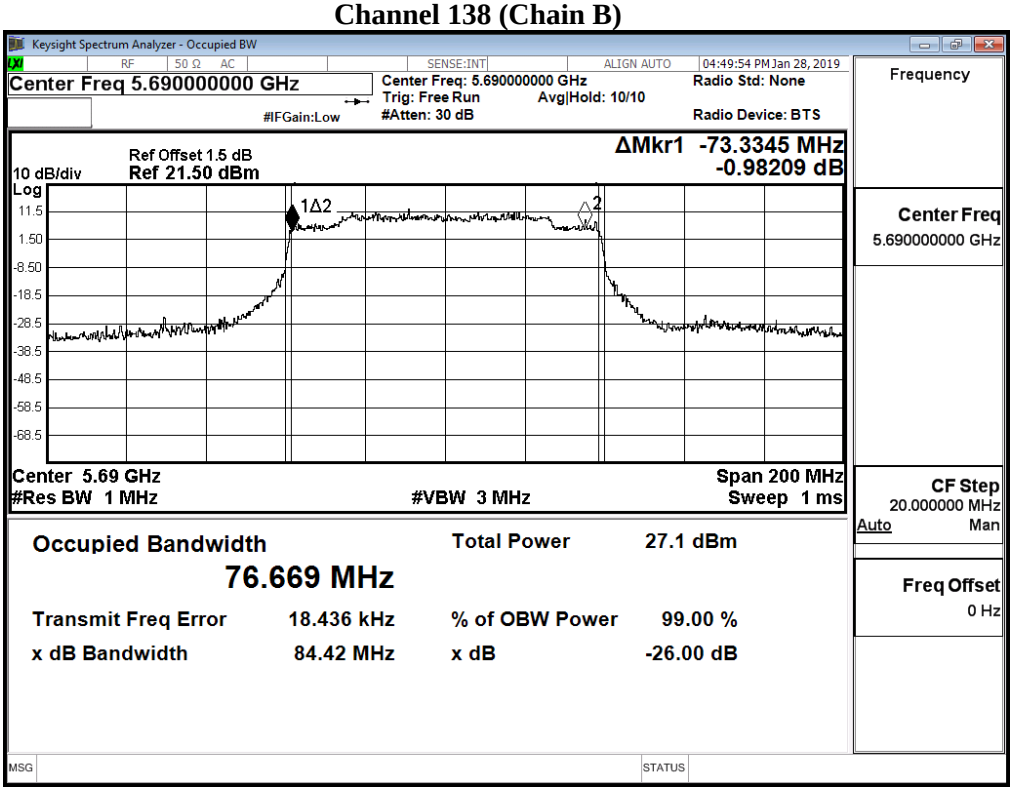

Maximum conducted output power:

Channel 138 (U-NII-2C) (Chain A)

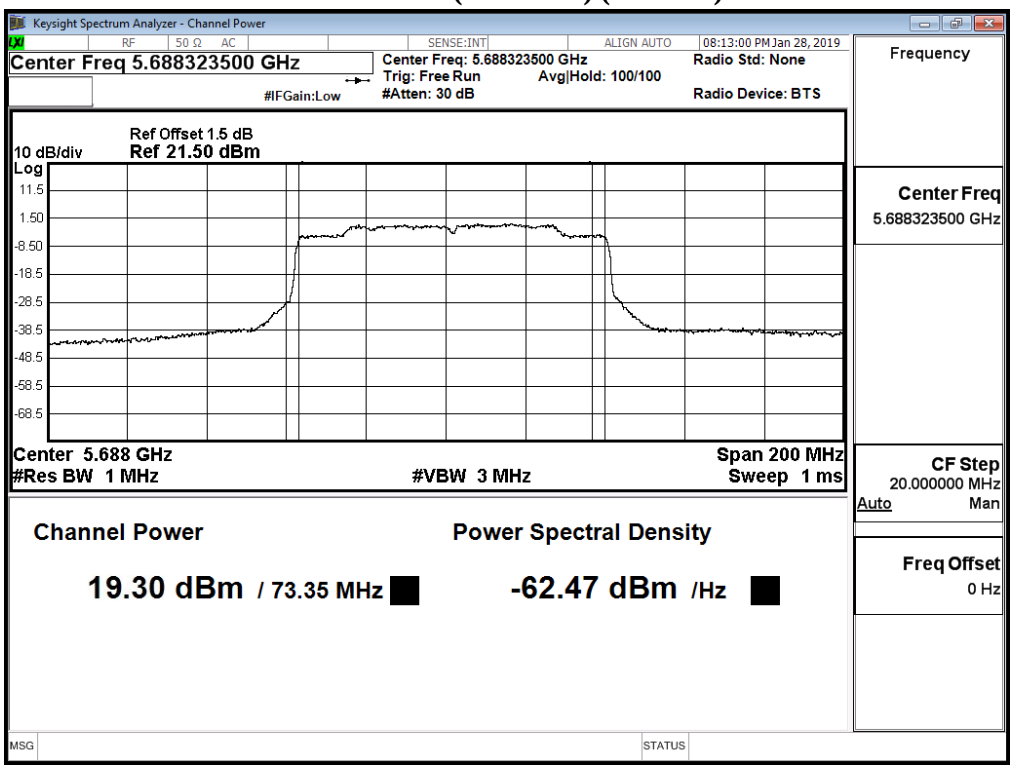

Maximum conducted output power:

Channel 138 (U-NII-2C) (Chain A)

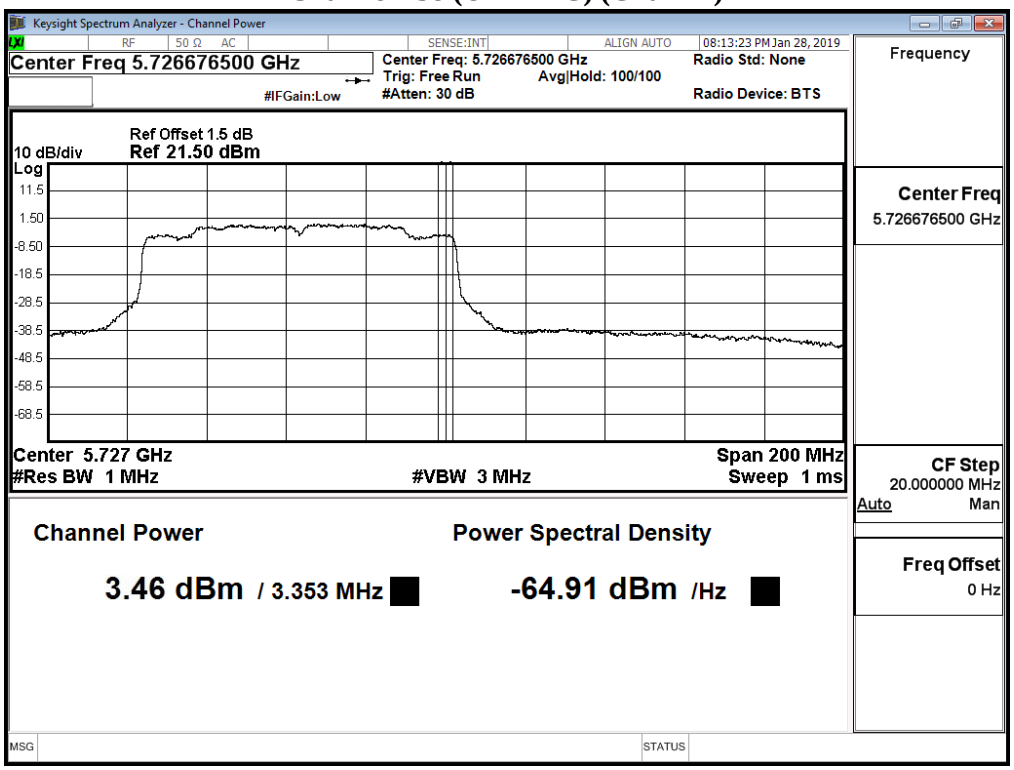

Maximum conducted output power:

Channel 138 (U-NII-3) (Chain B)

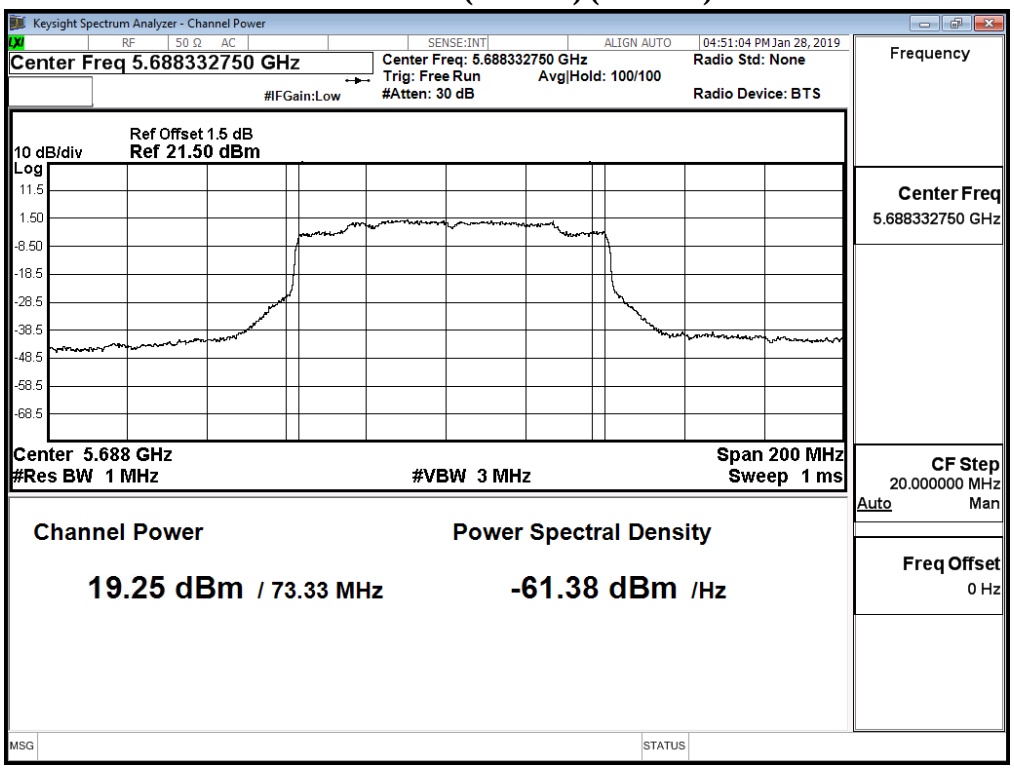

Maximum conducted output power:

Channel 138 (U-NII-3) (Chain B)

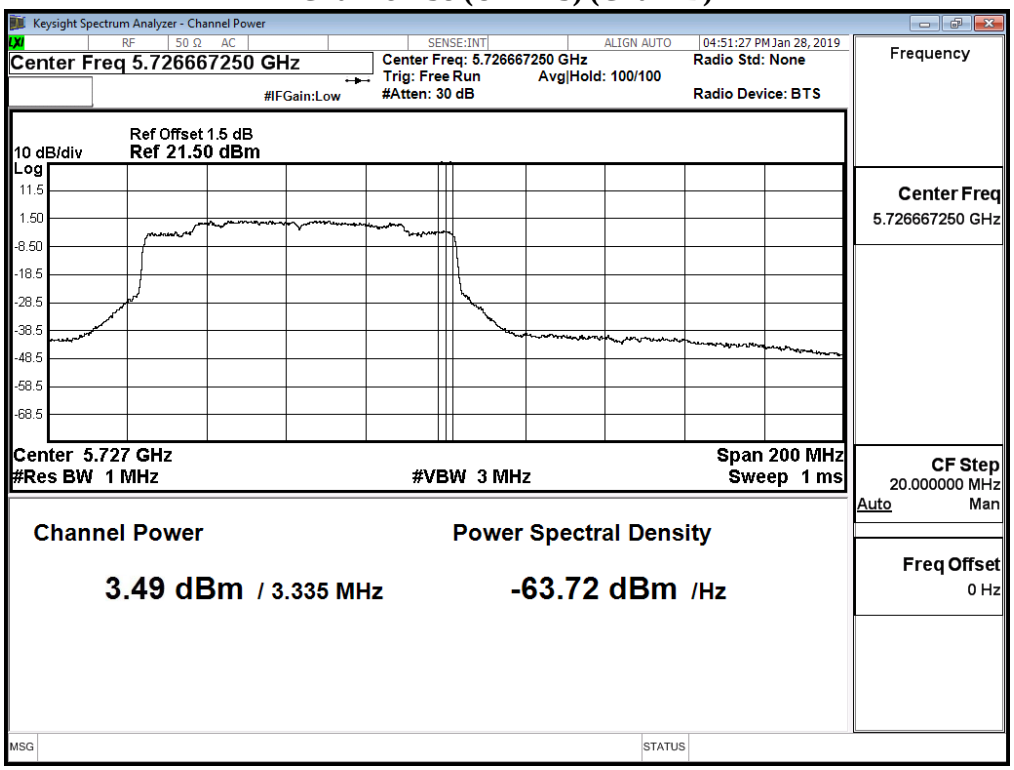

待測物名稱：Intel® Wi-Fi 6 AX200
待測物型號：AX200NGW　　測試項目：峰值發射功率
測試頻道：--　　測試模式：Mode 3: MIMO: 發射器 802.11ax-160BW
6 dB 頻寬：1MHz　　視頻頻寬：3MHz
檢測器：峰值　　環境溫度：21 ℃
測試日期：108 年 01 月 19 日　　環境濕度：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
50 (U-NII-1)	5250	9.48	9.42	9.30	9.17	9.11	8.99	8.87	8.74	8.66	8.49	8.40	8.24
50 (U-NII-2A)	5250	10.16	10.02	9.90	9.72	9.58	9.44	9.29	9.14	8.98	8.86	8.77	8.65
114	5570	13.80	13.68	13.53	13.39	13.27	13.18	13.00	12.87	12.77	12.70	12.59	12.45

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
50 (U-NII-1)	5250	9.85	9.76	9.69	9.55	9.38	9.26	9.11	9.02	8.90	8.76	8.58	8.48
50 (U-NII-2A)	5250	9.68	9.51	9.40	9.31	9.13	9.03	8.89	8.77	8.63	8.48	8.37	8.21
114	5570	13.64	13.50	13.33	13.22	13.13	13.03	12.88	12.79	12.61	12.43	12.35	12.26

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
50 (U-NII-1)	5250	--	9.480	9.850	12.68	24	--
50 (U-NII-2A)	5250	77.350	10.160	9.680	12.94	24	29.88
114	5570	154.680	13.800	13.640	16.73	24	32.89

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.