


|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:14 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1321 |                          |

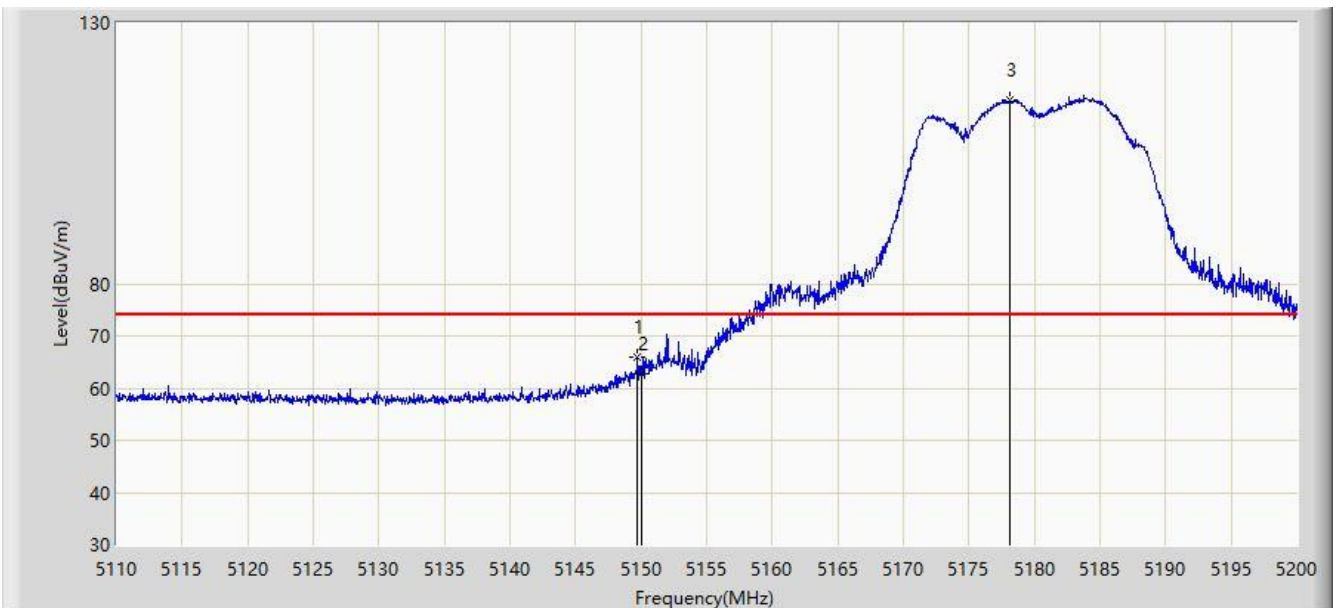


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.735        | 65.807                 | 62.161               | -8.193      | 74.000         | 3.646       | PK   |
| 2  |      |      | 5150.000        | 62.792                 | 59.146               | -11.208     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5178.085        | 115.320                | 111.656              | N/A         | N/A            | 3.664       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:16 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1321 |                          |

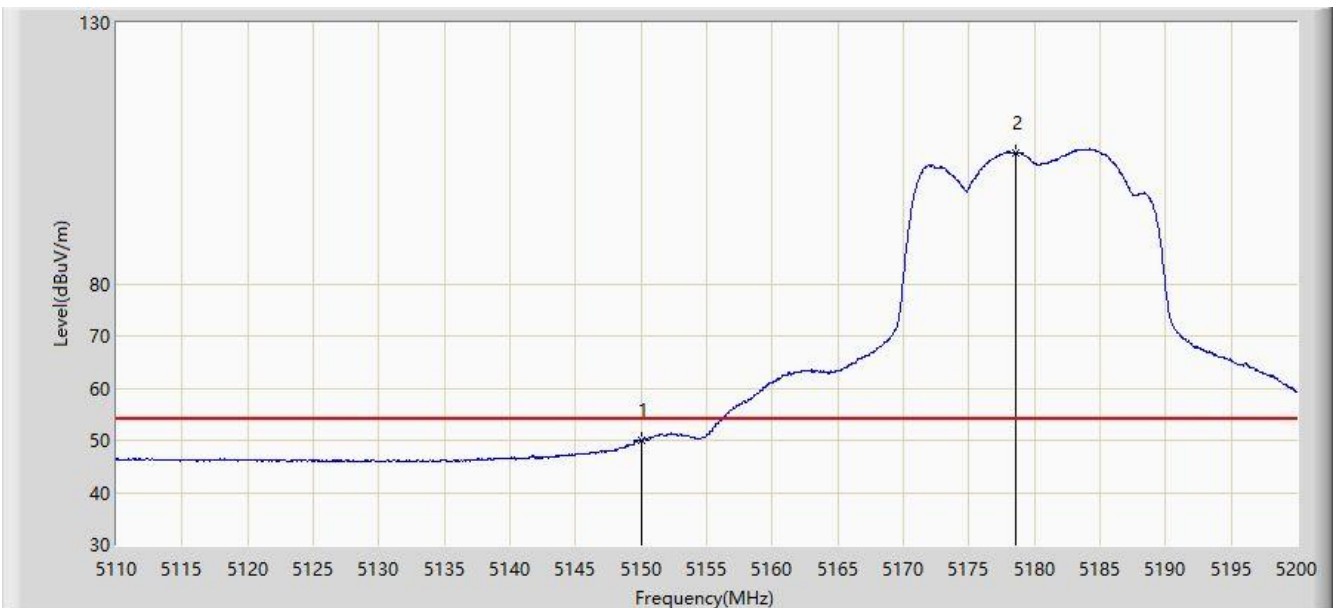


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 49.952                 | 46.306               | -4.048      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5178.535        | 105.174                | 101.510              | N/A         | N/A            | 3.664       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:17 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1321 |                          |

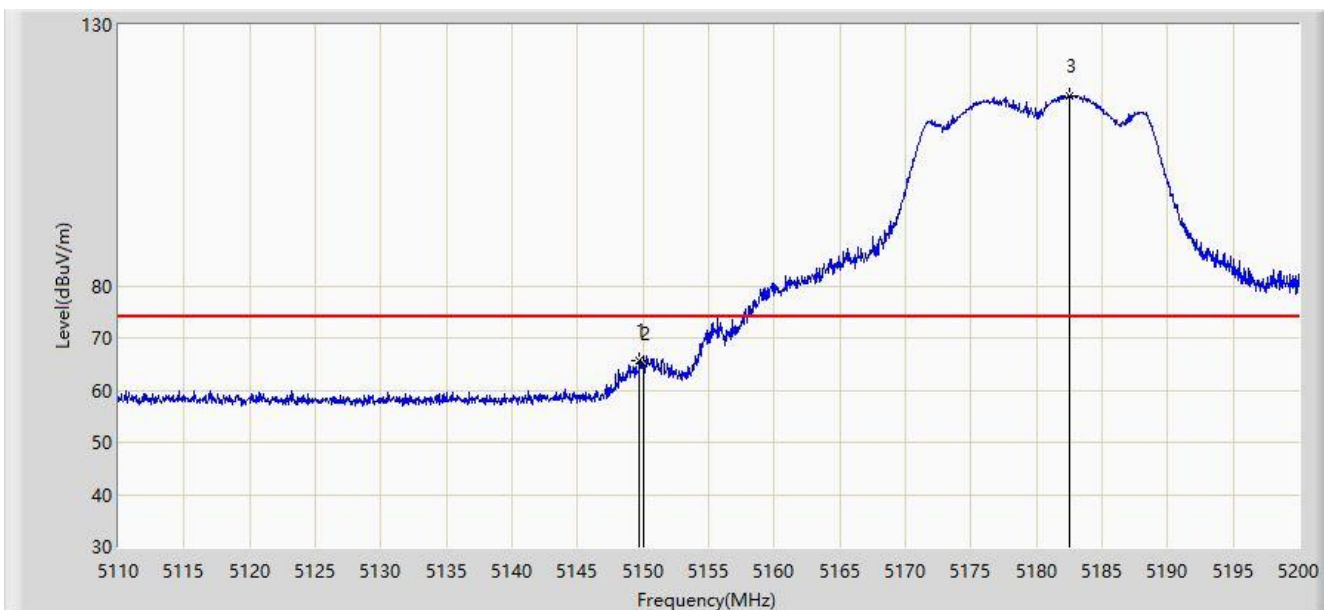


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.735        | 65.513                 | 61.867               | -8.487      | 74.000         | 3.646       | PK   |
| 2  |      |      | 5150.000        | 65.097                 | 61.451               | -8.903      | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5182.495        | 116.497                | 112.830              | N/A         | N/A            | 3.667       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:17 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1321 |                          |

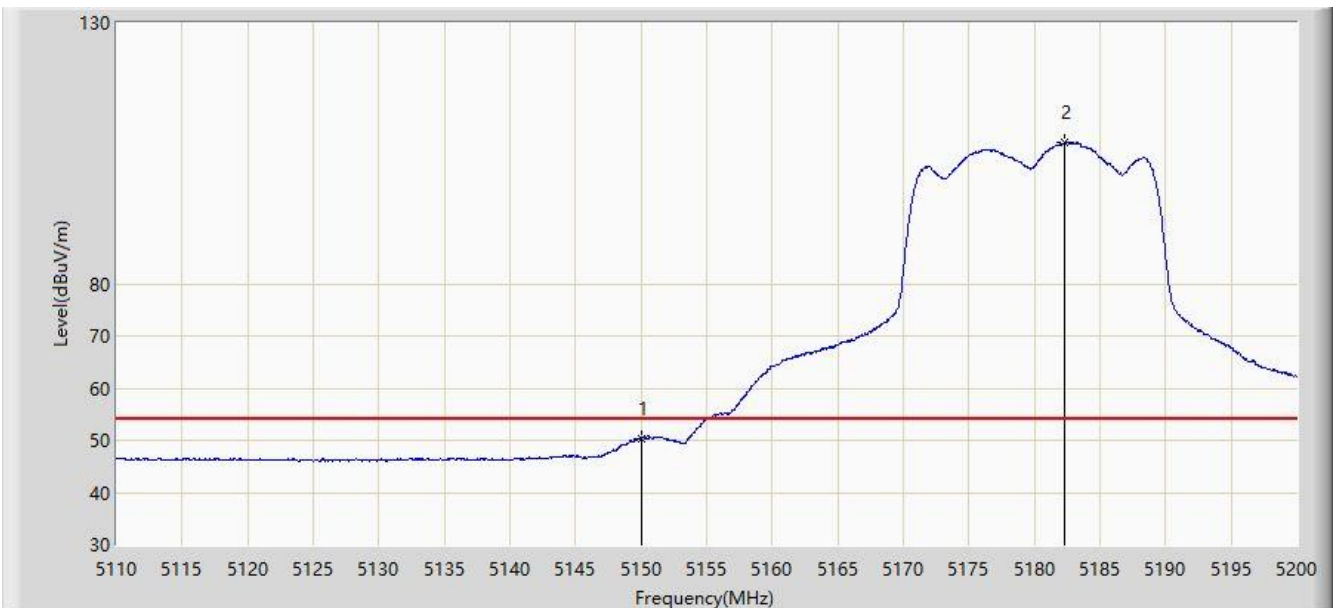


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.285                 | 46.639               | -3.715      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5182.315        | 107.178                | 103.512              | N/A         | N/A            | 3.666       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:19 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1321 |                          |

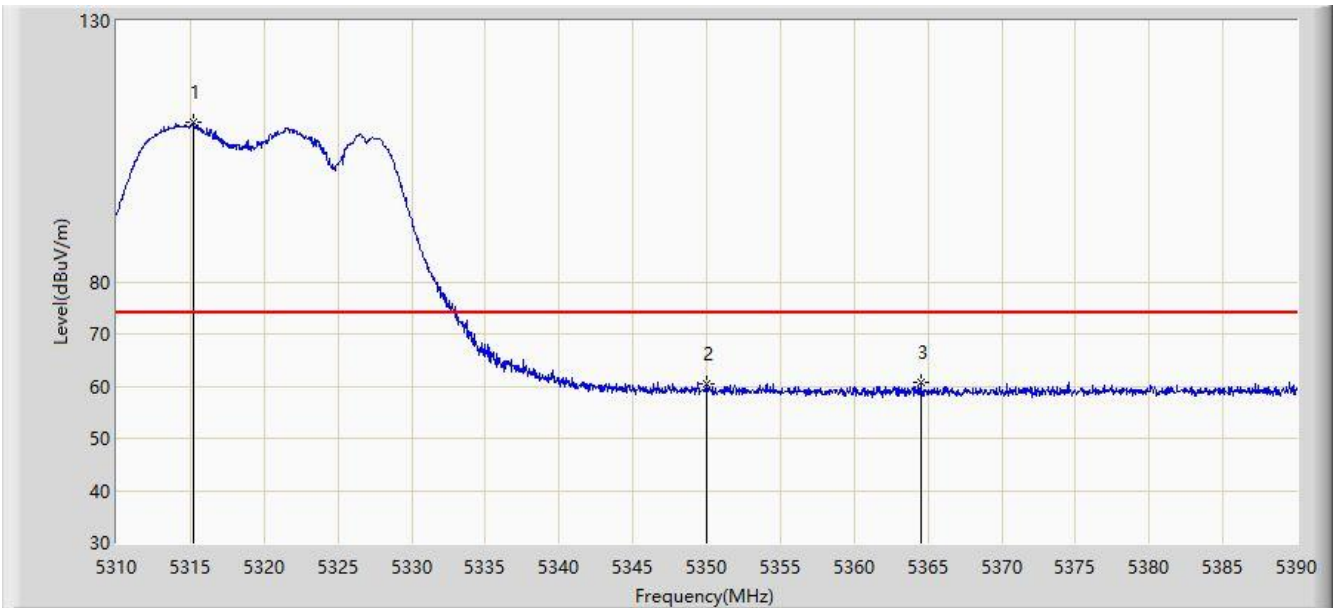


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5315.200        | 110.593                | 106.841              | N/A         | N/A            | 3.752       | PK   |
| 2  |      |      | 5350.000        | 60.301                 | 56.527               | -13.699     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5364.520        | 60.653                 | 56.870               | -13.347     | 74.000         | 3.782       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:20 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1321 |                          |

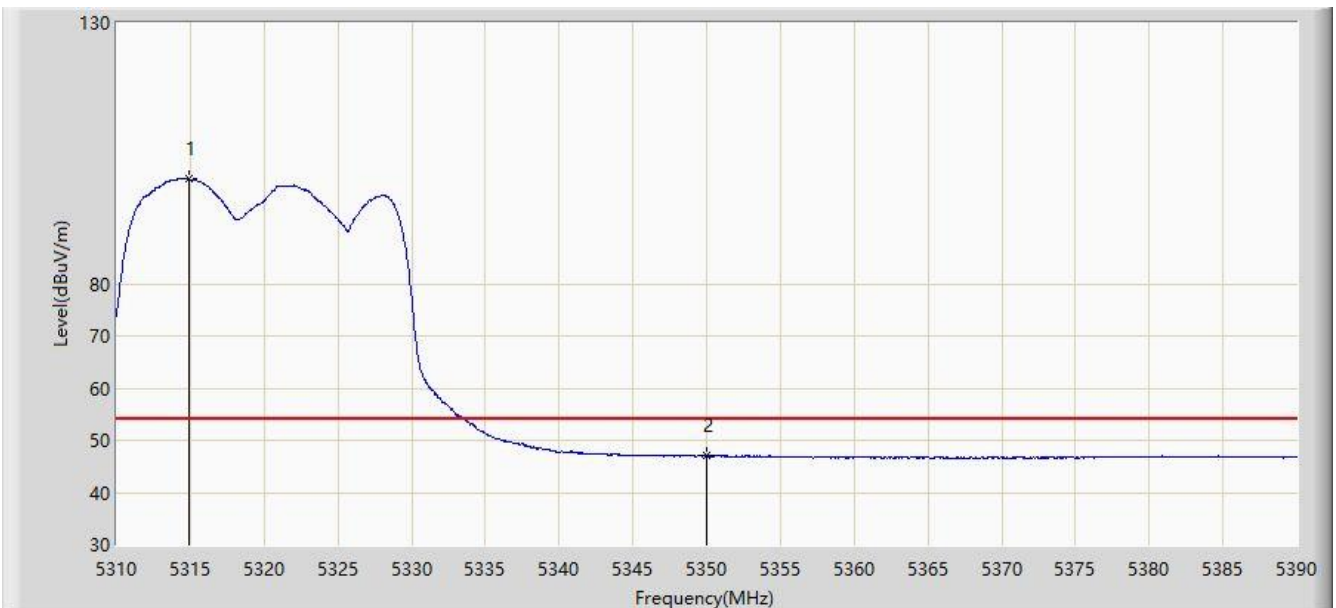


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5314.920        | 100.098                | 96.346               | N/A         | N/A            | 3.751       | AV   |
| 2  |      |      | 5350.000        | 47.078                 | 43.304               | -6.922      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:23 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1321 |                          |

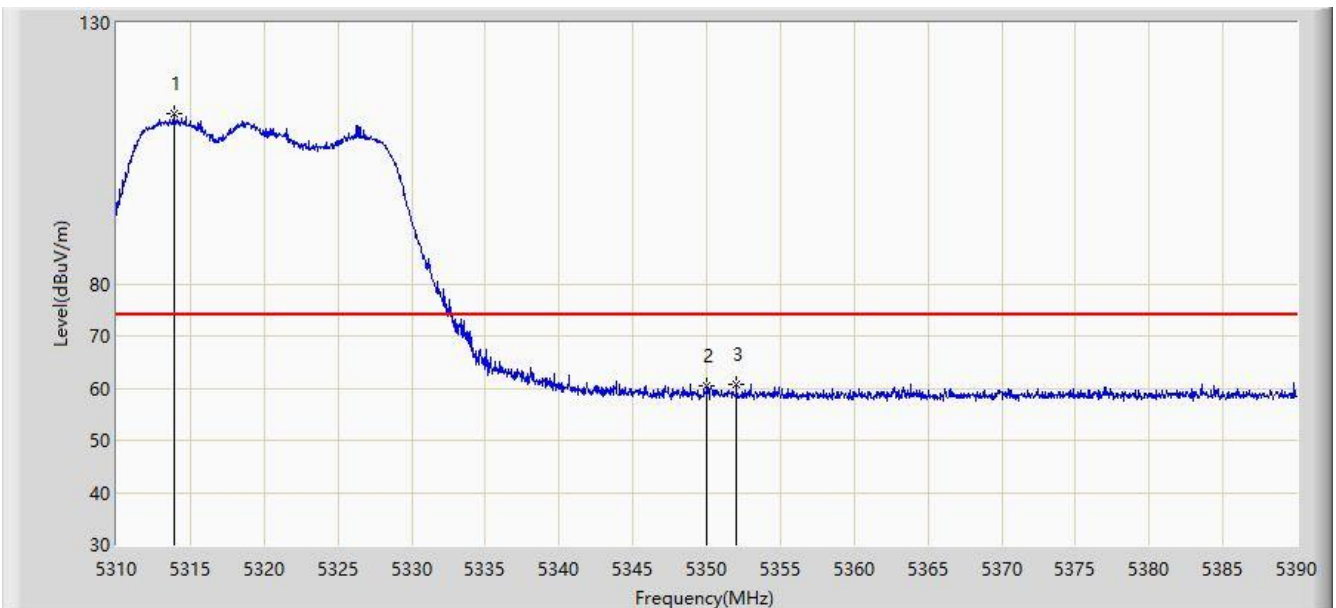


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5313.880        | 112.556                | 108.805              | N/A         | N/A            | 3.751       | PK   |
| 2  |      |      | 5350.000        | 60.448                 | 56.674               | -13.552     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5352.000        | 60.810                 | 57.035               | -13.190     | 74.000         | 3.775       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:24 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1321 |                          |

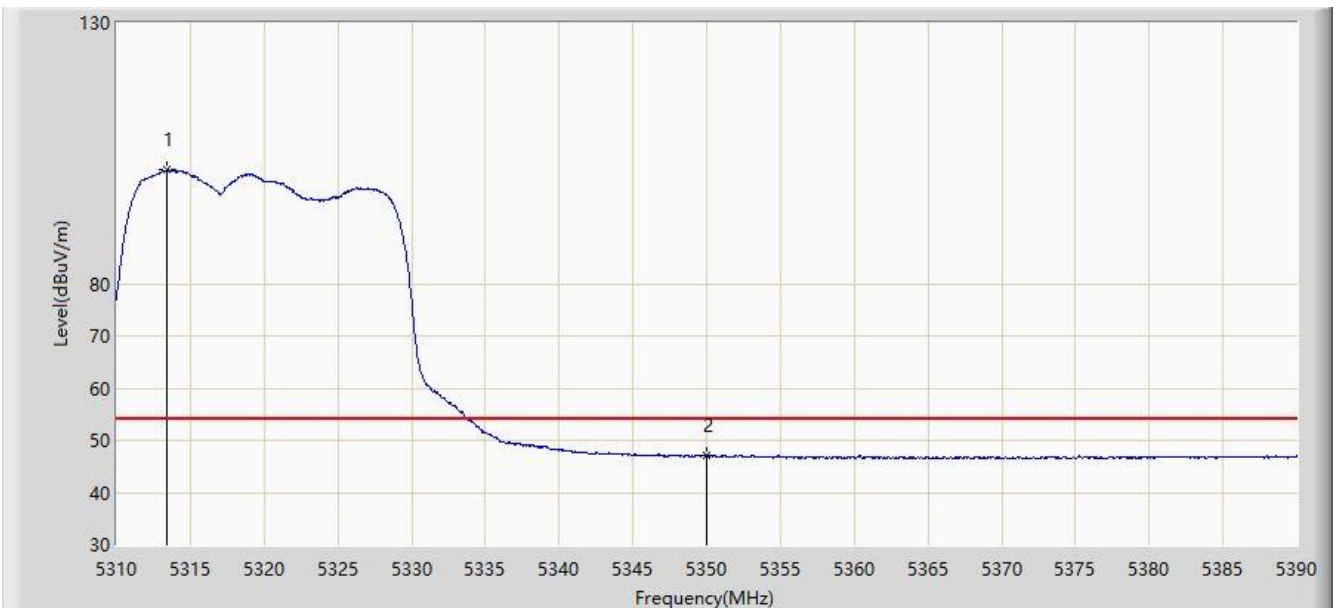


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5313.440        | 101.960                | 98.209               | N/A         | N/A            | 3.750       | AV   |
| 2  |      |      | 5350.000        | 47.003                 | 43.229               | -6.997      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:26 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1321 |                          |

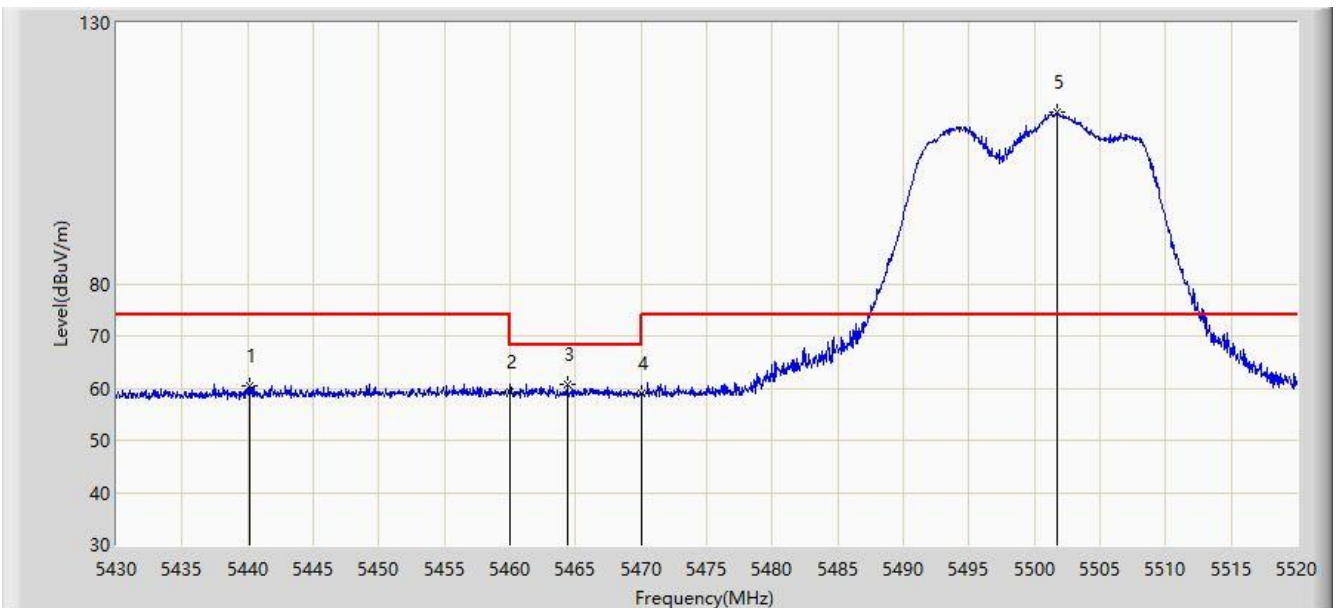


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5440.170        | 60.443                 | 56.612               | -13.557     | 74.000         | 3.831       | PK   |
| 2  |      |      | 5460.000        | 59.166                 | 55.322               | -14.834     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5464.380        | 60.696                 | 56.849               | -7.504      | 68.200         | 3.847       | PK   |
| 4  |      |      | 5470.000        | 59.083                 | 55.232               | -9.117      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5501.685        | 112.771                | 108.887              | N/A         | N/A            | 3.884       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:27 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1321 |                          |

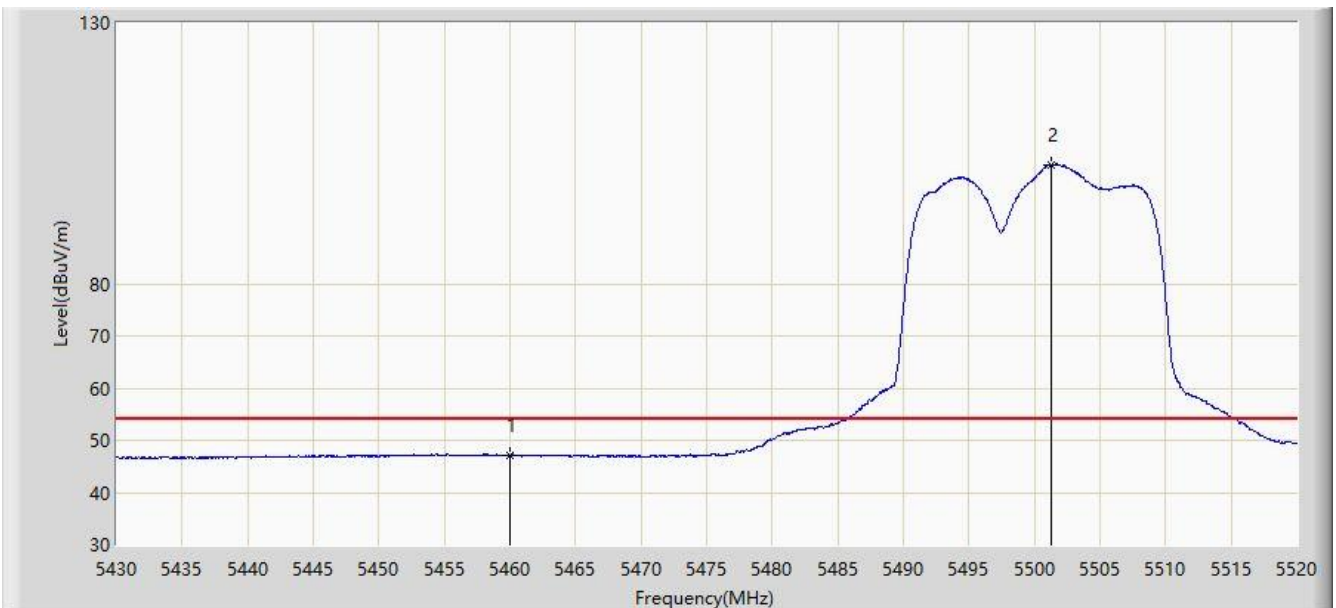


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.081                 | 43.237               | -6.919      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5501.325        | 102.861                | 98.977               | N/A         | N/A            | 3.883       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:31 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1321 |                          |

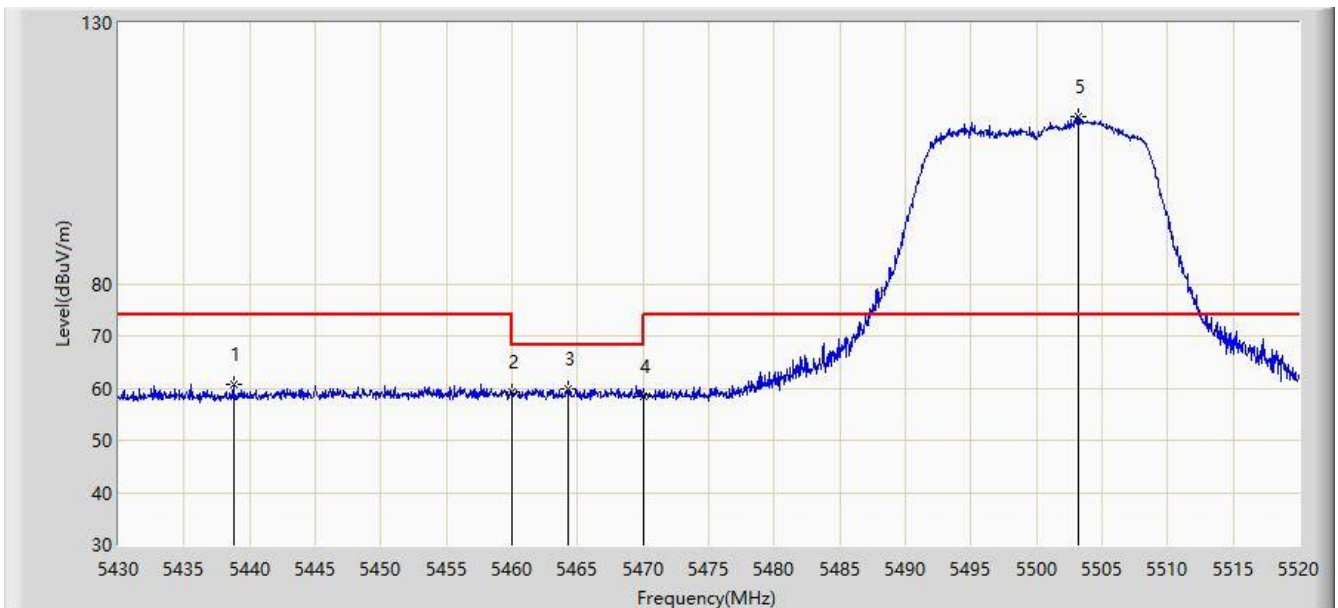


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5438.775        | 60.802                 | 56.972               | -13.198     | 74.000         | 3.830       | PK   |
| 2  |      |      | 5460.000        | 59.240                 | 55.396               | -14.760     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5464.335        | 59.808                 | 55.961               | -8.392      | 68.200         | 3.847       | PK   |
| 4  |      |      | 5470.000        | 58.343                 | 54.492               | -9.857      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5503.215        | 111.941                | 108.054              | N/A         | N/A            | 3.887       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:31 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1321 |                          |

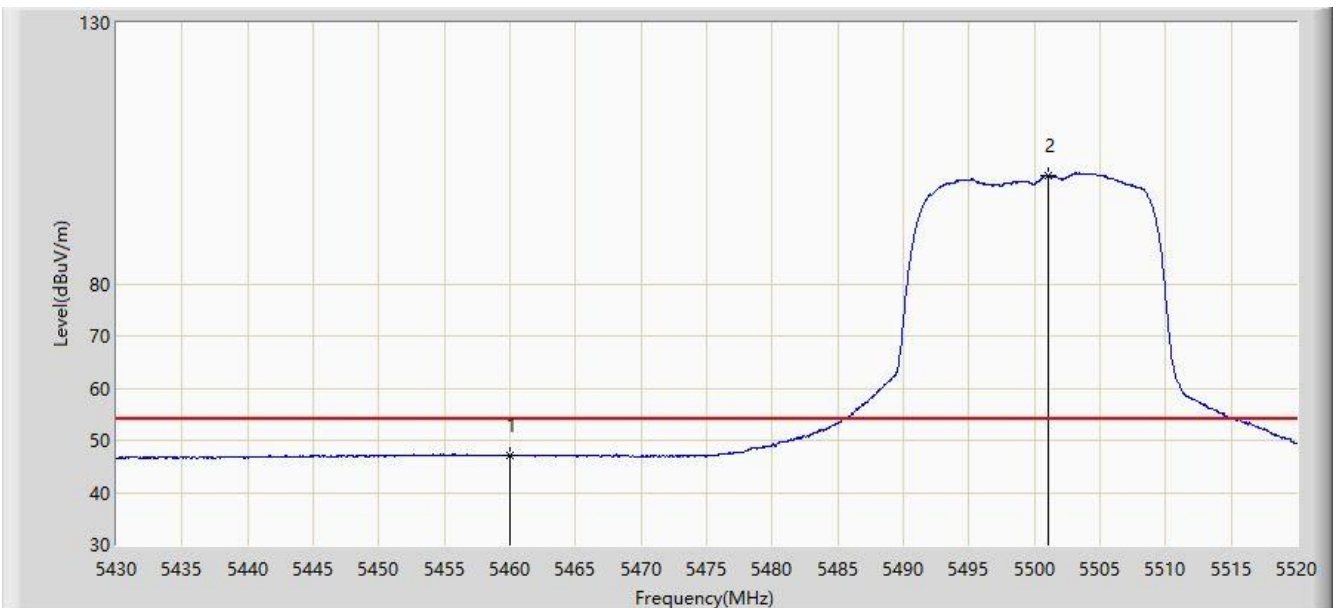


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.076                 | 43.232               | -6.924      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5501.055        | 100.668                | 96.785               | N/A         | N/A            | 3.883       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:34 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1321 |                          |

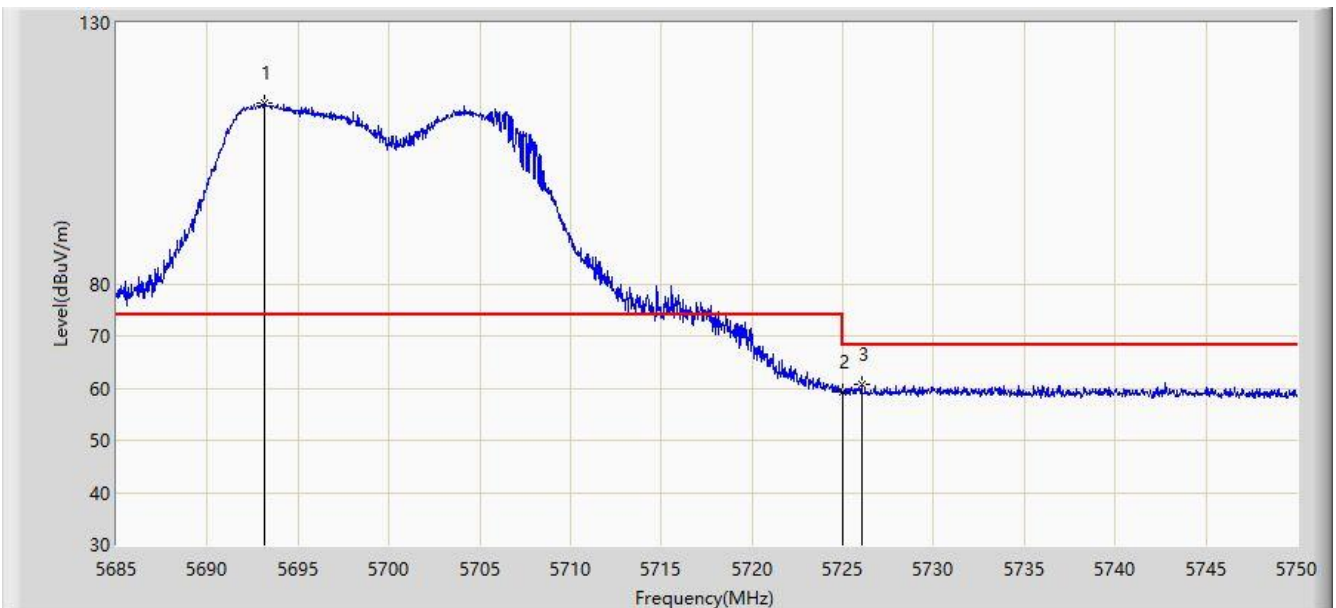


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5693.125        | 114.729                | 110.117              | N/A         | N/A            | 4.611       | PK   |
| 2  |      |      | 5725.000        | 59.227                 | 54.493               | -8.973      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5726.015        | 60.860                 | 56.122               | -7.340      | 68.200         | 4.738       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:35 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1321 |                          |

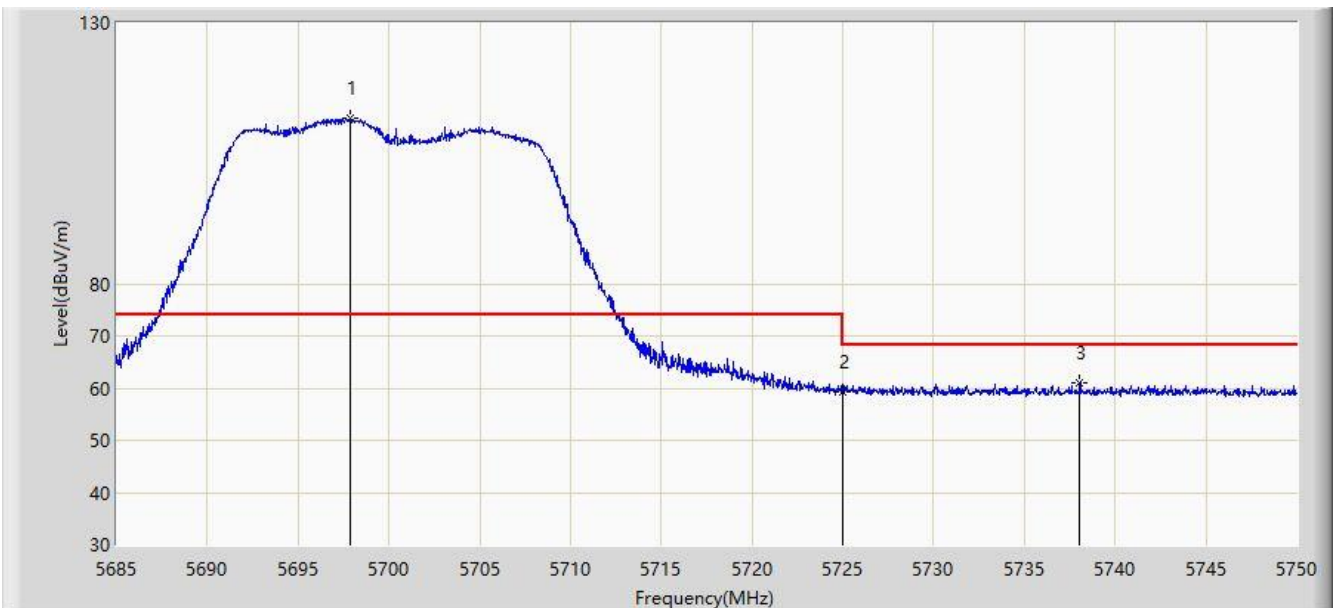


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5697.902        | 111.754                | 107.124              | N/A         | N/A            | 4.629       | PK   |
| 2  |      |      | 5725.000        | 59.279                 | 54.545               | -8.921      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5738.040        | 60.952                 | 56.168               | -7.248      | 68.200         | 4.784       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:39 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1321 |                          |

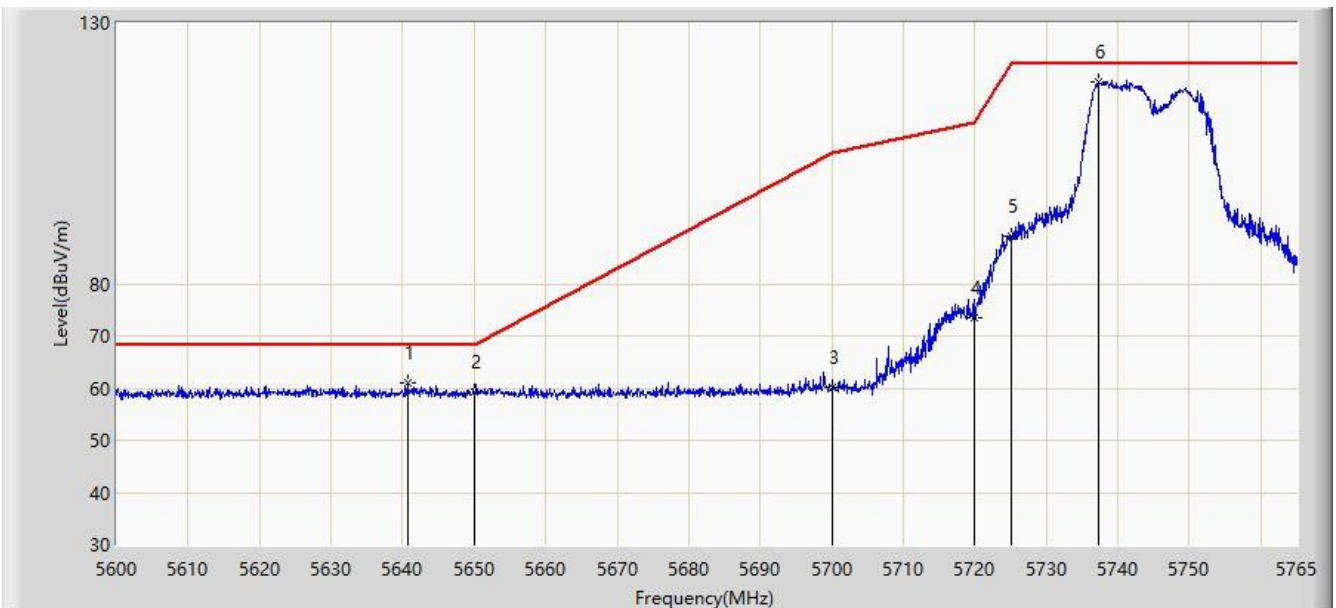


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5640.672        | 60.874                 | 56.463               | -7.326      | 68.200         | 4.411       | PK   |
| 2  |      |      | 5650.000        | 59.131                 | 54.685               | -9.069      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 60.236                 | 55.598               | -44.964     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 73.539                 | 68.824               | -37.261     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 89.144                 | 84.410               | -33.056     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5737.280        | 118.806                | 114.025              | N/A         | N/A            | 4.781       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:40 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1321 |                          |

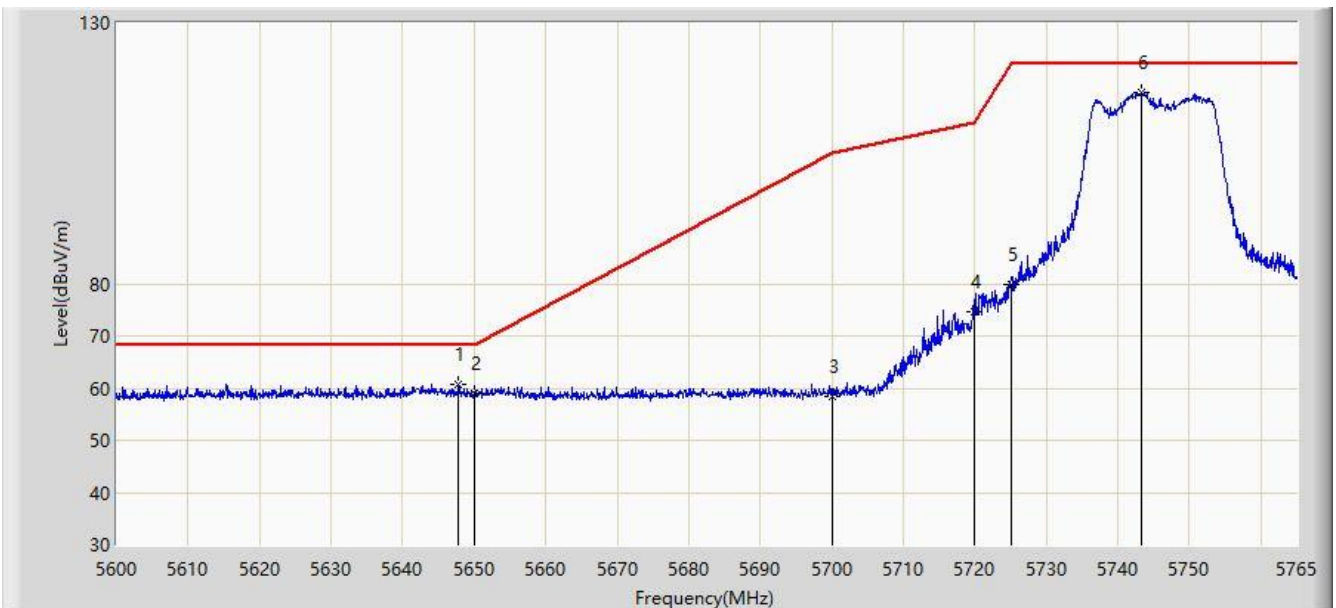


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5647.850        | 60.773                 | 56.335               | -7.427      | 68.200         | 4.438       | PK   |
| 2  |      |      | 5650.000        | 58.926                 | 54.480               | -9.274      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 58.444                 | 53.806               | -46.756     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 74.596                 | 69.881               | -36.204     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 79.988                 | 75.254               | -42.212     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5743.220        | 116.546                | 111.742              | N/A         | N/A            | 4.803       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:42 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1321 |                          |

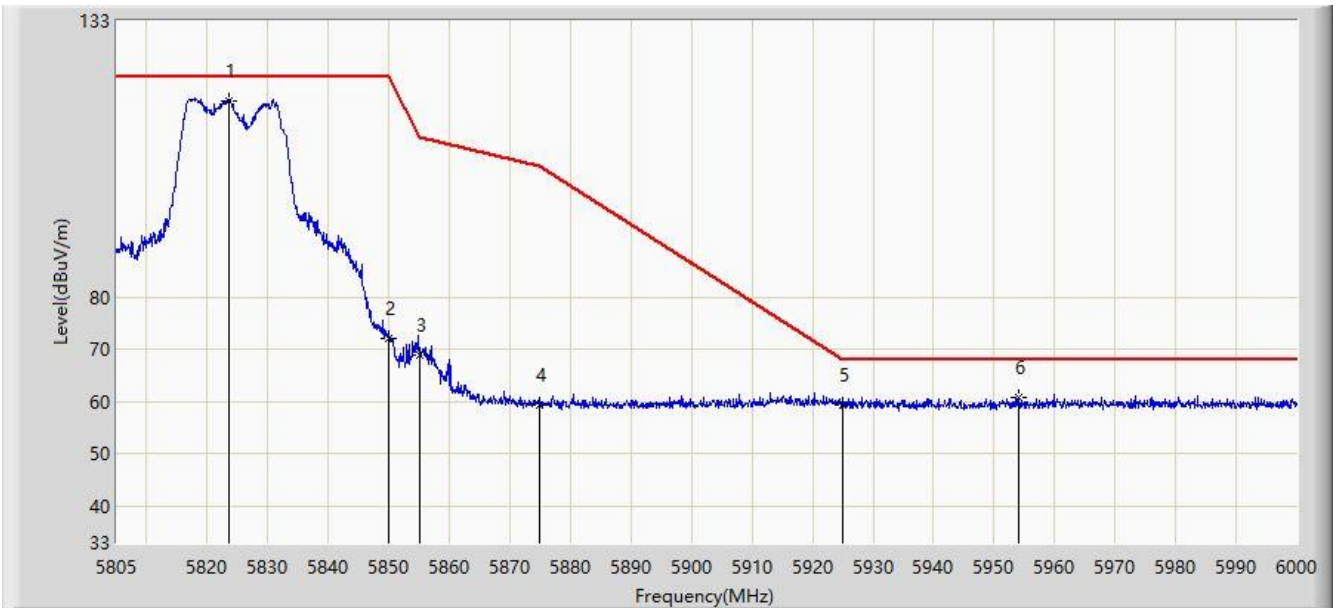


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5823.525        | 117.667                | 112.554              | N/A         | N/A            | 5.112       | PK   |
| 2  |      |      | 5850.000        | 72.217                 | 67.003               | -49.983     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 69.069                 | 63.836               | -41.731     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 59.387                 | 54.077               | -45.813     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.463                 | 53.961               | -8.737      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5953.980        | 60.903                 | 55.289               | -7.297      | 68.200         | 5.614       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:44 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1321 |                          |

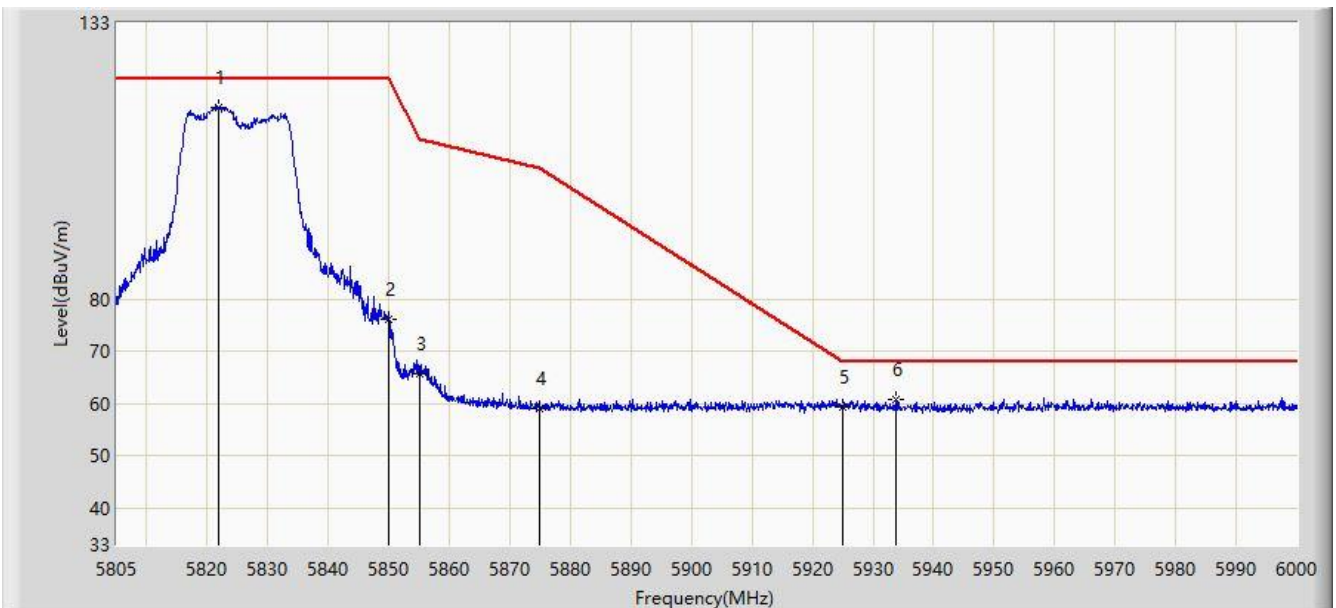


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5821.868        | 116.779                | 111.673              | N/A         | N/A            | 5.106       | PK   |
| 2  |      |      | 5850.000        | 76.132                 | 70.918               | -46.068     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 65.665                 | 60.432               | -45.135     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 58.979                 | 53.669               | -46.221     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.325                 | 53.823               | -8.875      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5933.895        | 60.907                 | 55.371               | -7.293      | 68.200         | 5.537       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:59 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1321 |                          |

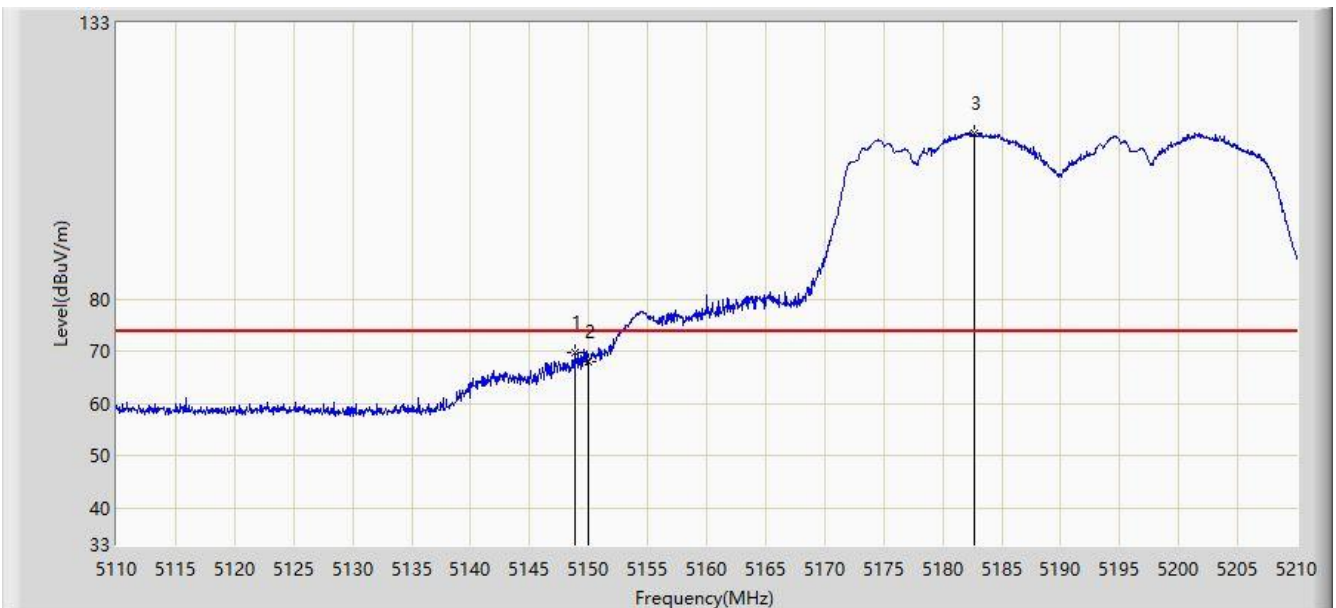


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.800        | 69.805                 | 66.160               | -4.195      | 74.000         | 3.645       | PK   |
| 2  |      |      | 5150.000        | 68.201                 | 64.555               | -5.799      | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5182.650        | 111.872                | 108.205              | N/A         | N/A            | 3.667       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 19:56 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1321 |                          |

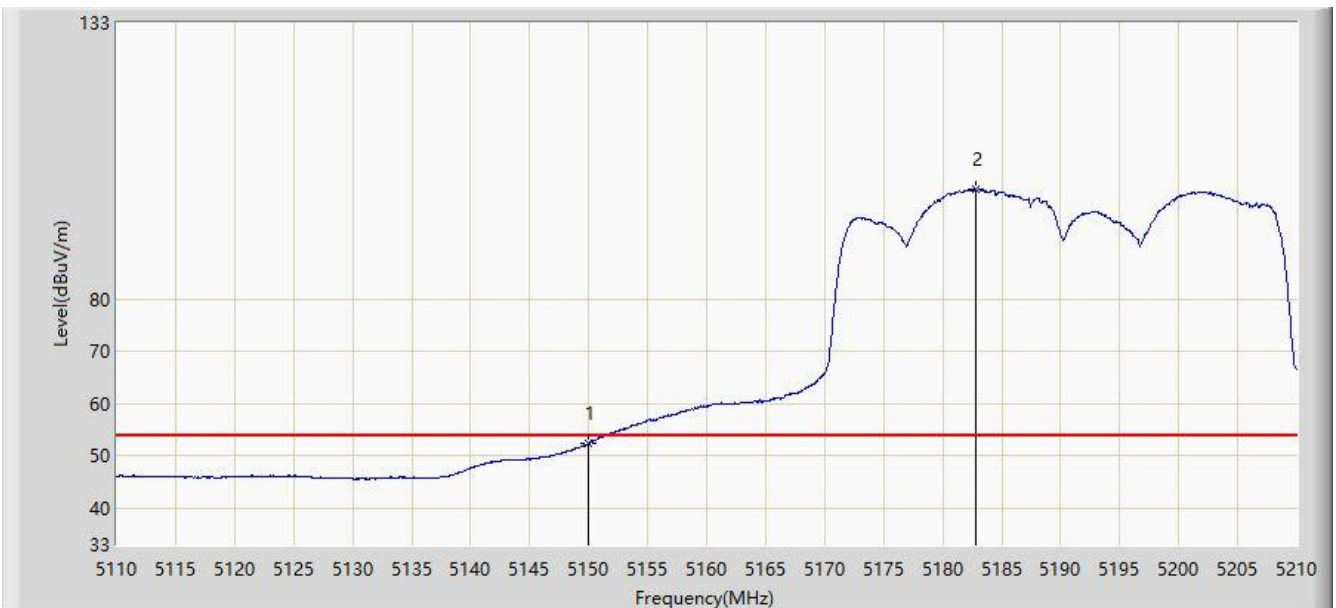


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.441                 | 48.795               | -1.559      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5182.750        | 101.113                | 97.446               | N/A         | N/A            | 3.666       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:01 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1321 |                          |

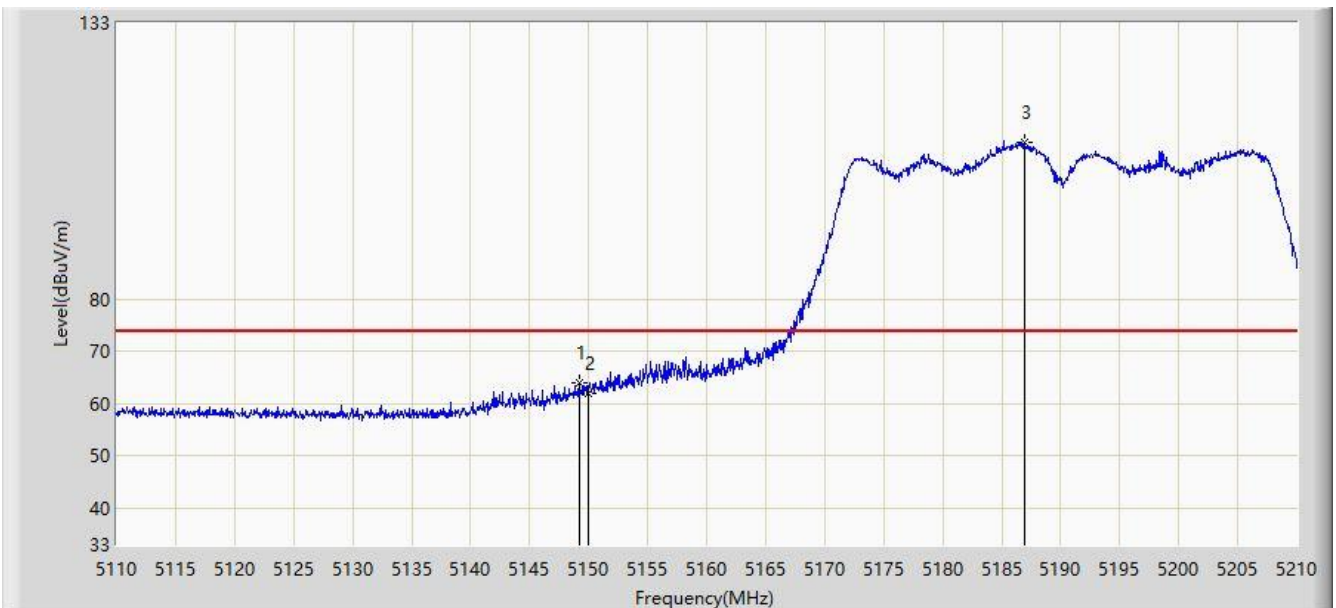


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.200        | 63.953                 | 60.307               | -10.047     | 74.000         | 3.646       | PK   |
| 2  |      |      | 5150.000        | 62.123                 | 58.477               | -11.877     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5187.000        | 110.098                | 106.428              | N/A         | N/A            | 3.669       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:03 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1321 |                          |

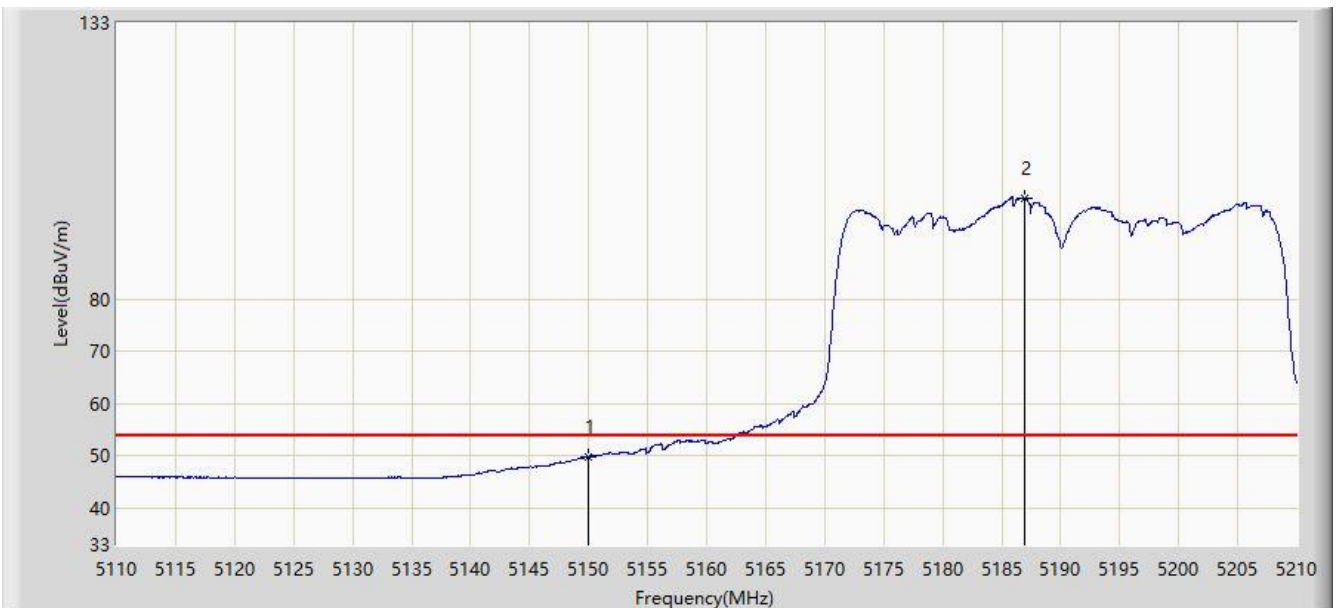


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 49.891                 | 46.245               | -4.109      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5186.950        | 99.387                 | 95.717               | N/A         | N/A            | 3.669       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:05 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1321 |                          |

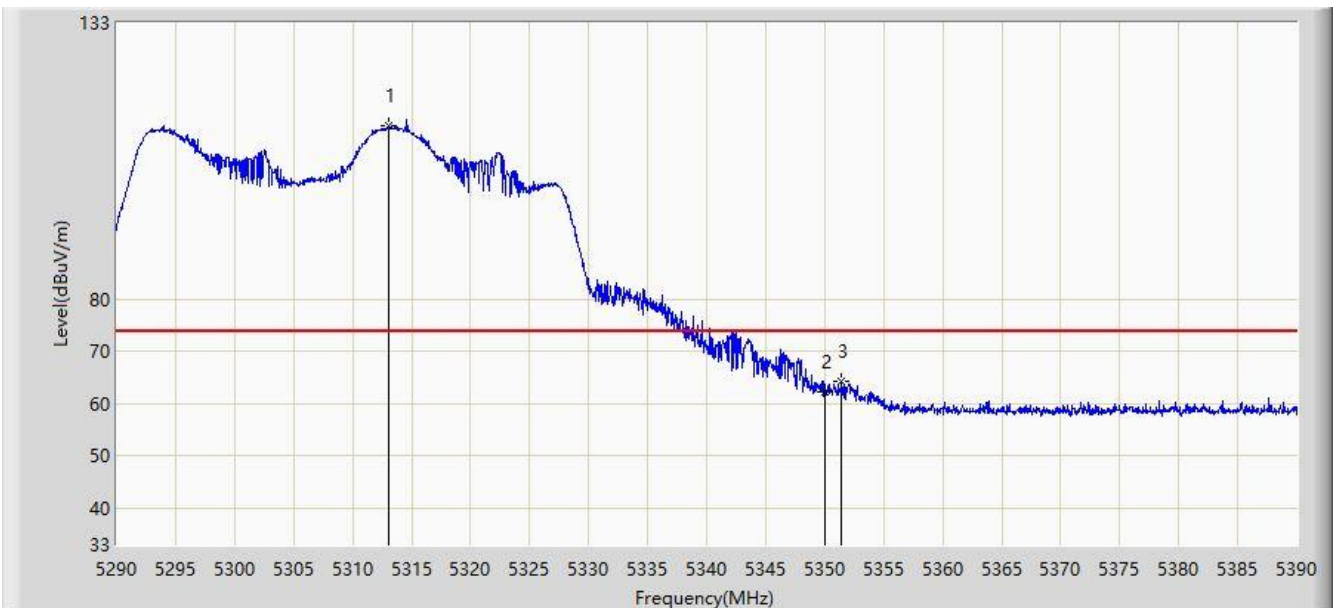


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5313.000        | 113.416                | 109.665              | N/A         | N/A            | 3.751       | PK   |
| 2  |      |      | 5350.000        | 62.176                 | 58.402               | -11.824     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5351.450        | 64.191                 | 60.416               | -9.809      | 74.000         | 3.775       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:06 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1321 |                          |

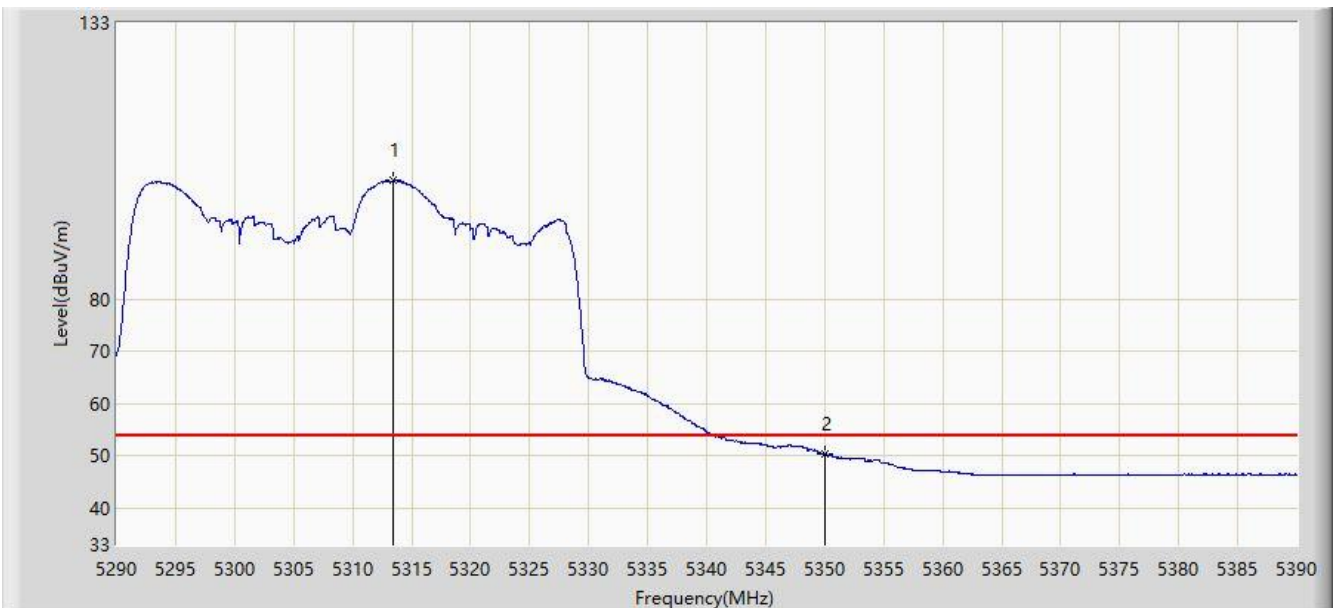


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5313.450        | 102.799                | 99.048               | N/A         | N/A            | 3.750       | AV   |
| 2  |      |      | 5350.000        | 50.288                 | 46.514               | -3.712      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:07 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1321 |                          |

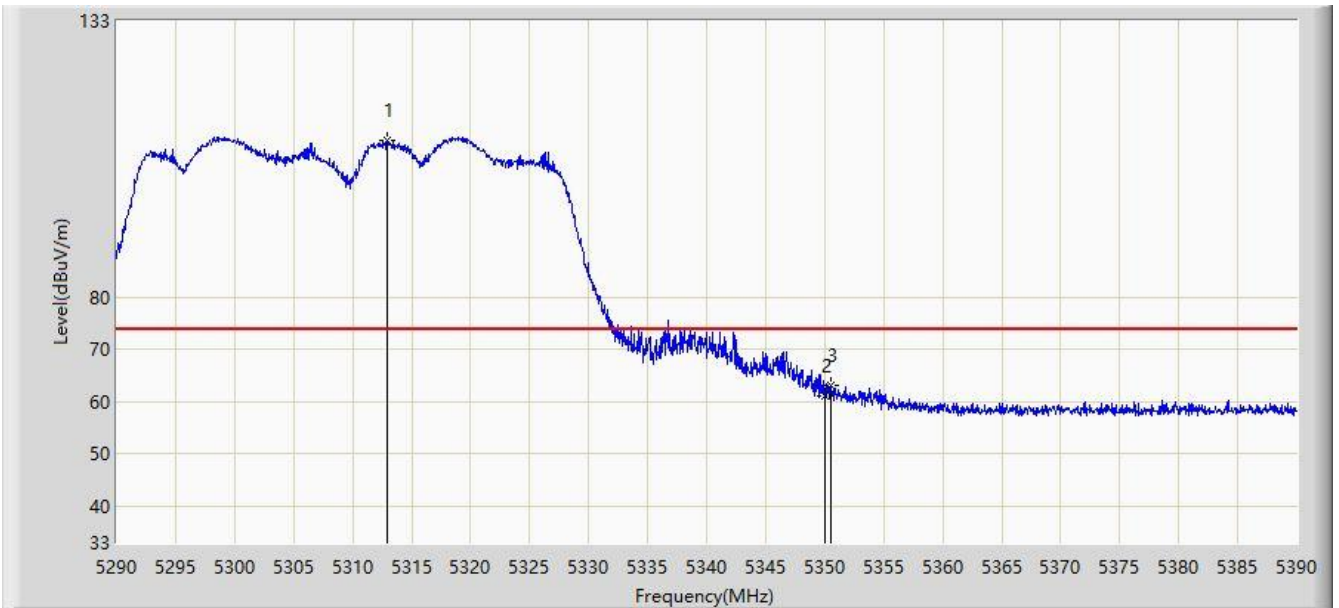


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5312.900        | 110.056                | 106.306              | N/A         | N/A            | 3.751       | PK   |
| 2  |      |      | 5350.000        | 61.037                 | 57.263               | -12.963     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5350.500        | 63.143                 | 59.369               | -10.857     | 74.000         | 3.774       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:07 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1321 |                          |

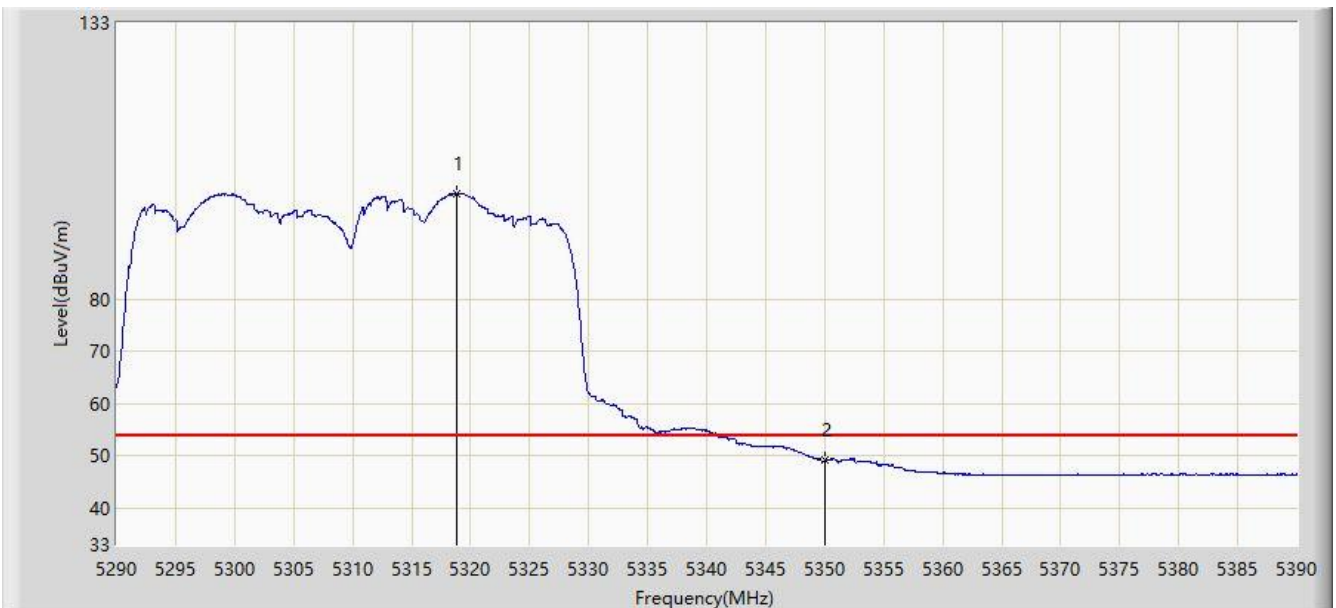


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5318.850        | 100.246                | 96.491               | N/A         | N/A            | 3.755       | AV   |
| 2  |      |      | 5350.000        | 49.174                 | 45.400               | -4.826      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:09 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1321 |                          |

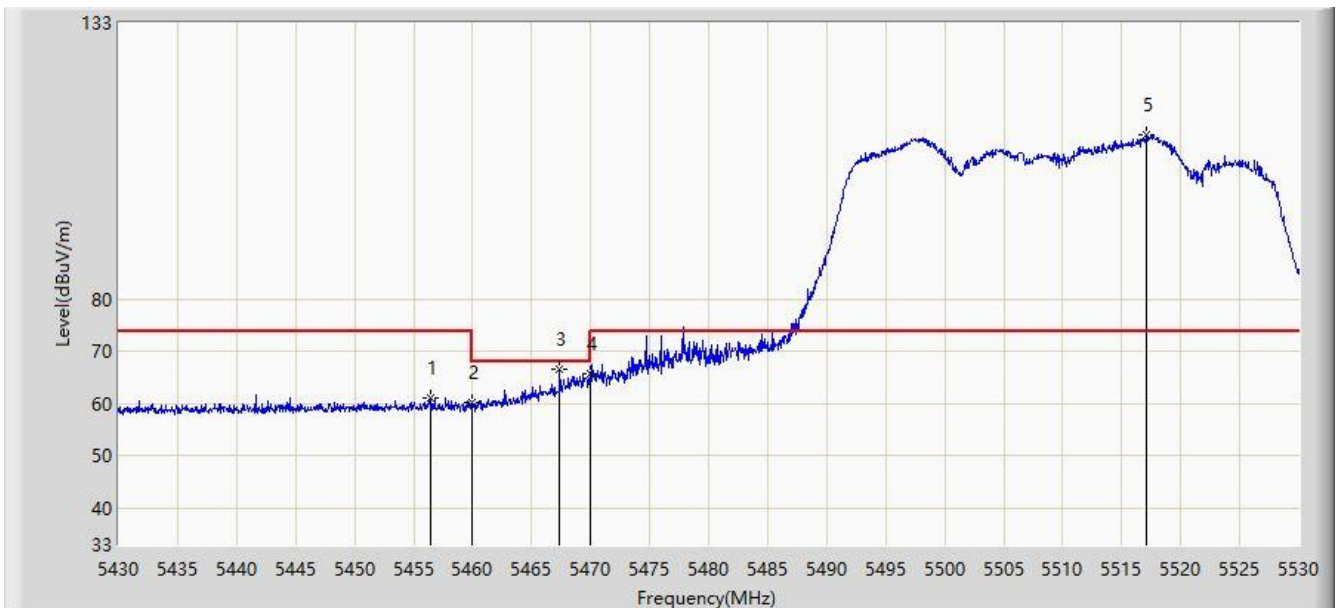


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5456.500        | 61.204                 | 57.362               | -12.796     | 74.000         | 3.842       | PK   |
| 2  |      |      | 5460.000        | 60.187                 | 56.343               | -13.813     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5467.400        | 66.516                 | 62.667               | -1.684      | 68.200         | 3.849       | PK   |
| 4  |      |      | 5470.000        | 65.776                 | 61.925               | -2.424      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5517.150        | 111.623                | 107.687              | N/A         | N/A            | 3.936       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:11 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1321 |                          |

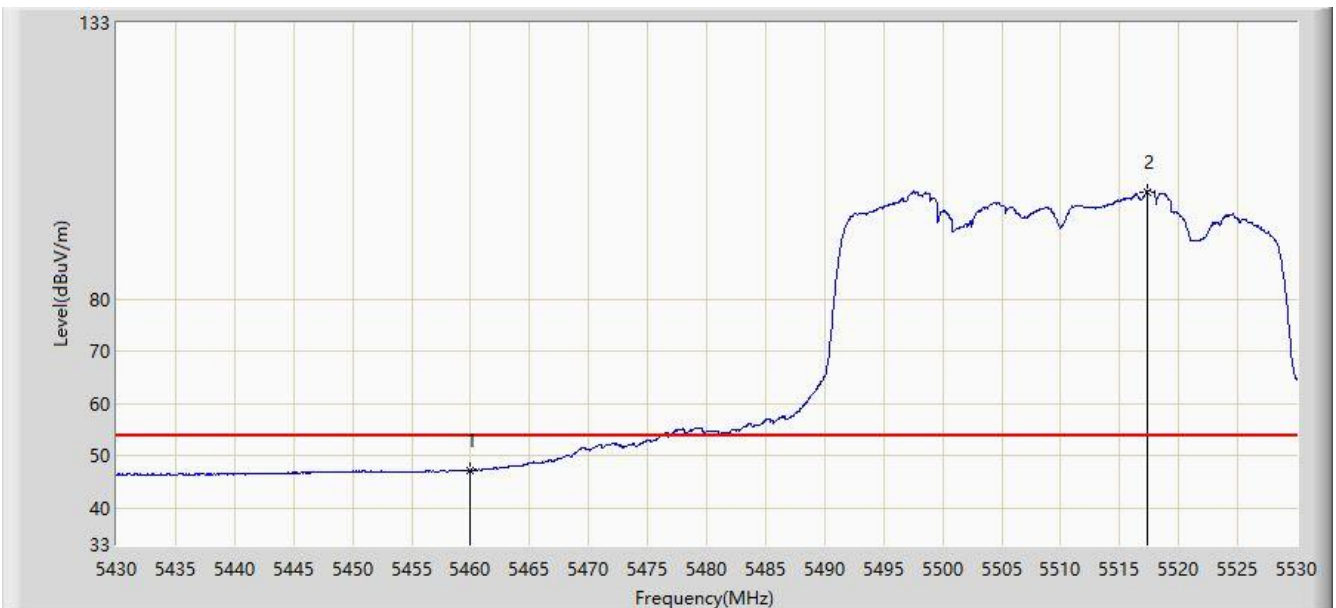


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.243                 | 43.399               | -6.757      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5517.350        | 100.589                | 96.652               | N/A         | N/A            | 3.938       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:11 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1321 |                          |

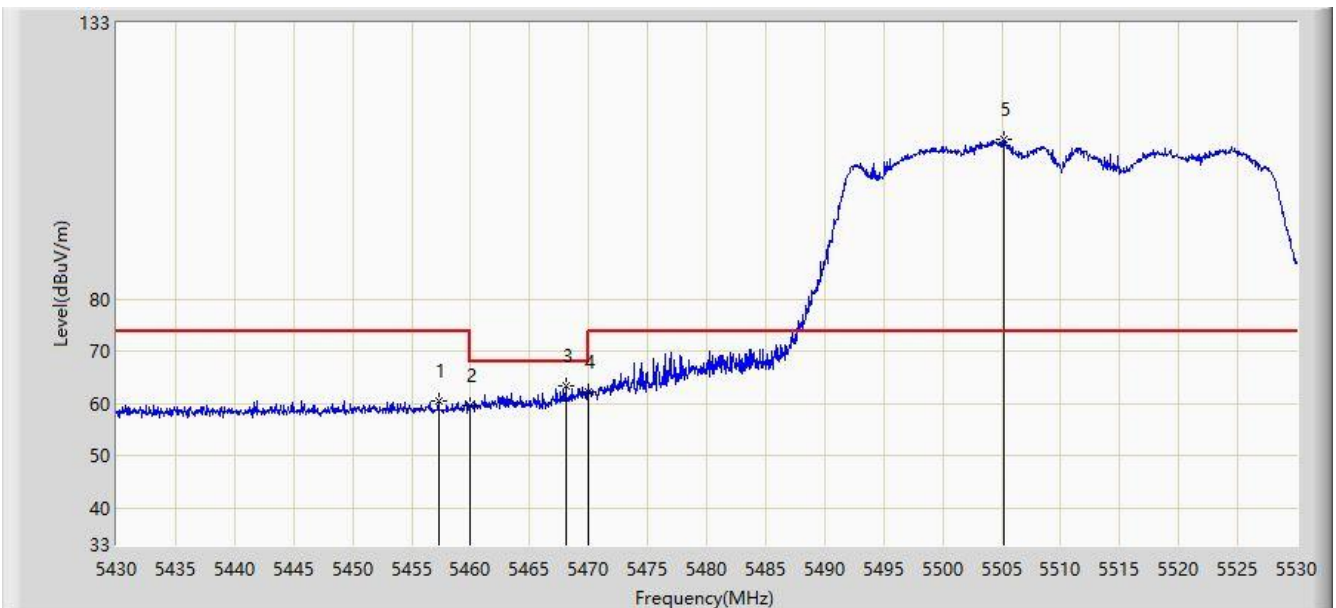


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5457.300        | 60.543                 | 56.701               | -13.457     | 74.000         | 3.842       | PK   |
| 2  |      |      | 5460.000        | 59.681                 | 55.837               | -14.319     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5468.050        | 63.527                 | 59.678               | -4.673      | 68.200         | 3.849       | PK   |
| 4  |      |      | 5470.000        | 62.196                 | 58.345               | -6.004      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5505.250        | 110.744                | 106.854              | N/A         | N/A            | 3.890       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:12 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1321 |                          |

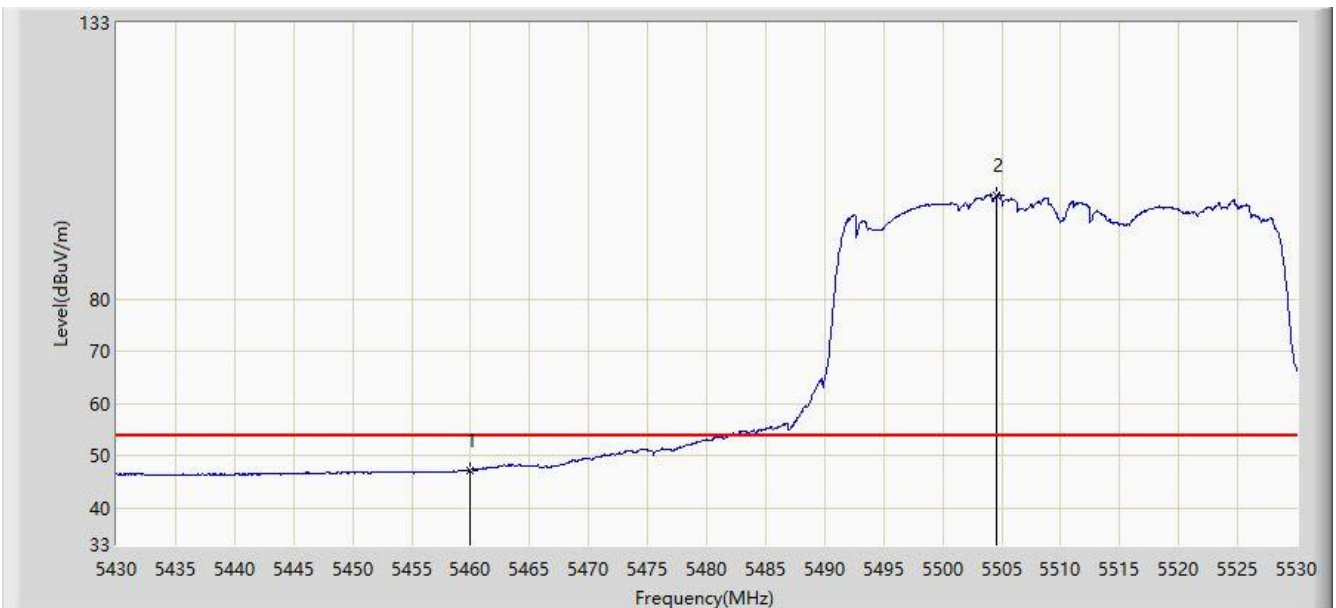


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.295                 | 43.451               | -6.705      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5504.600        | 100.051                | 96.162               | N/A         | N/A            | 3.889       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:15 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with OAW-AP1321 |                          |

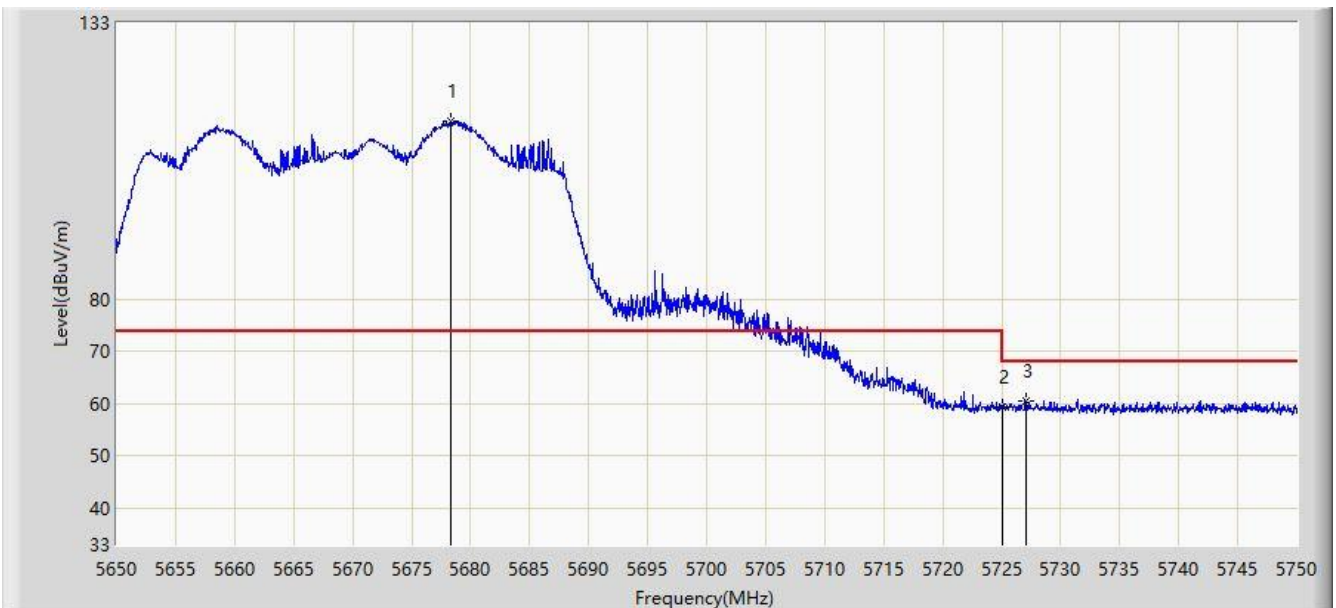


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5678.350        | 114.231                | 109.676              | N/A         | N/A            | 4.555       | PK   |
| 2  |      |      | 5725.000        | 59.269                 | 54.535               | -8.931      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5727.100        | 60.635                 | 55.893               | -7.565      | 68.200         | 4.742       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:16 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with OAW-AP1321 |                          |

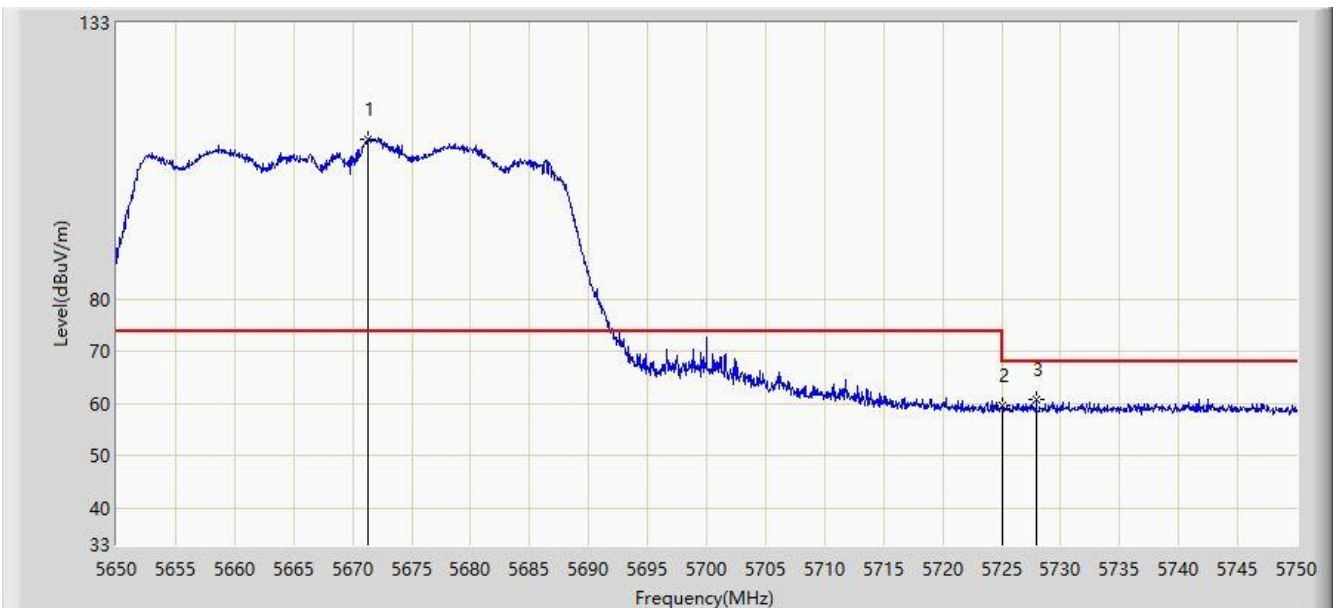


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5671.350        | 110.574                | 106.046              | N/A         | N/A            | 4.528       | PK   |
| 2  |      |      | 5725.000        | 59.742                 | 55.008               | -8.458      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5727.950        | 60.792                 | 56.047               | -7.408      | 68.200         | 4.744       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:18 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz with OAW-AP1321 |                          |

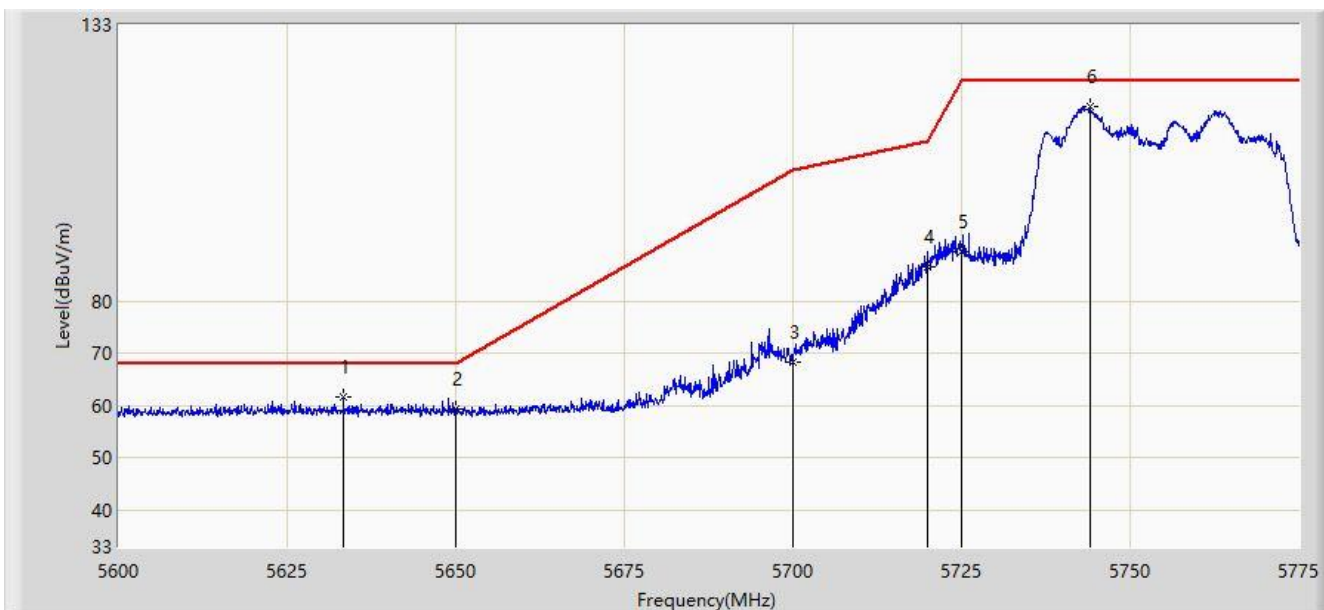


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5633.337        | 61.719                 | 57.337               | -6.481      | 68.200         | 4.382       | PK   |
| 2  |      |      | 5650.000        | 59.238                 | 54.792               | -8.962      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 68.437                 | 63.799               | -36.763     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 86.574                 | 81.859               | -24.226     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 89.404                 | 84.670               | -32.796     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5744.025        | 117.331                | 112.524              | N/A         | N/A            | 4.807       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:19 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz with OAW-AP1321 |                          |

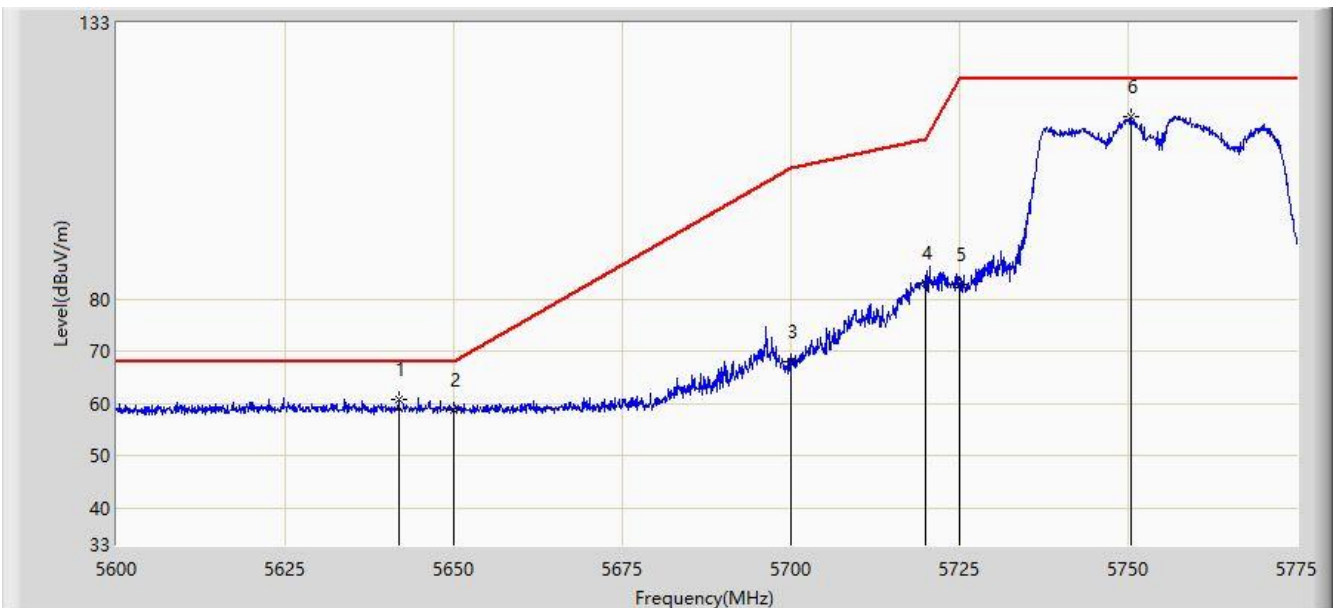


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.825        | 60.866                 | 56.451               | -7.334      | 68.200         | 4.415       | PK   |
| 2  |      |      | 5650.000        | 58.706                 | 54.260               | -9.494      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 68.061                 | 63.423               | -37.139     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 83.192                 | 78.477               | -27.608     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 82.936                 | 78.202               | -39.264     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5750.413        | 114.885                | 110.054              | N/A         | N/A            | 4.832       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:20 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz with OAW-AP1321 |                          |

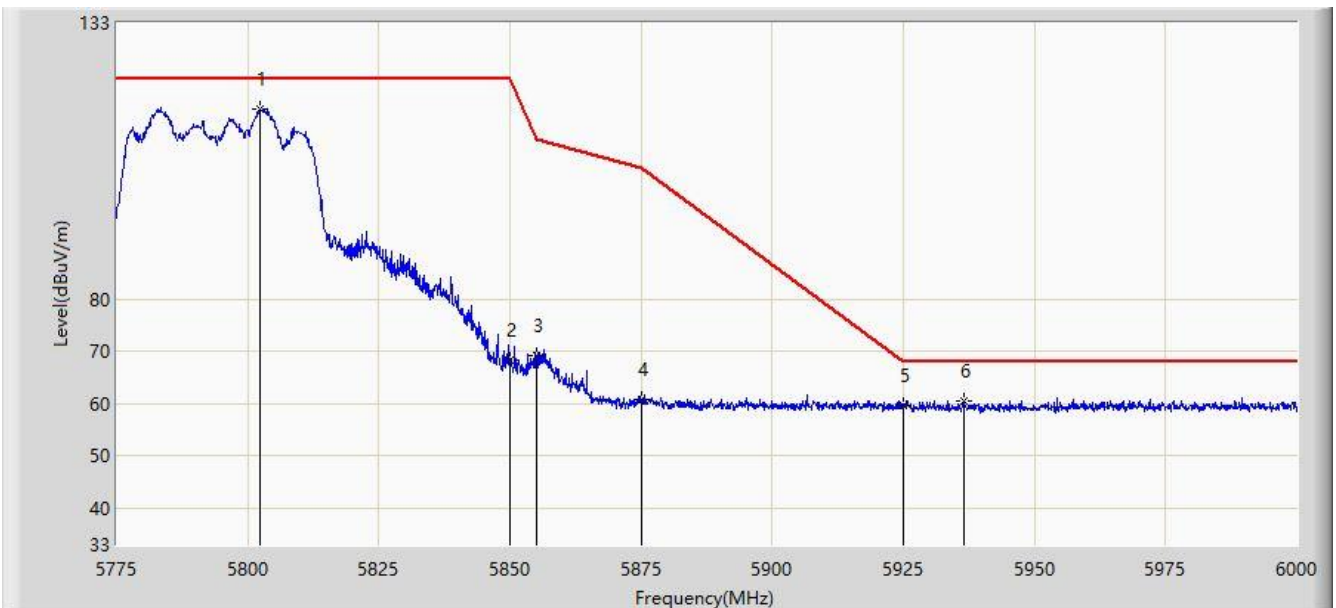


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5802.450        | 116.443                | 111.411              | N/A         | N/A            | 5.031       | PK   |
| 2  |      |      | 5850.000        | 68.471                 | 63.257               | -53.729     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 69.236                 | 64.003               | -41.564     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 60.682                 | 55.372               | -44.518     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.628                 | 54.126               | -8.572      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5936.437        | 60.617                 | 55.071               | -7.583      | 68.200         | 5.547       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/04/01 - 20:22 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz with OAW-AP1321 |                          |

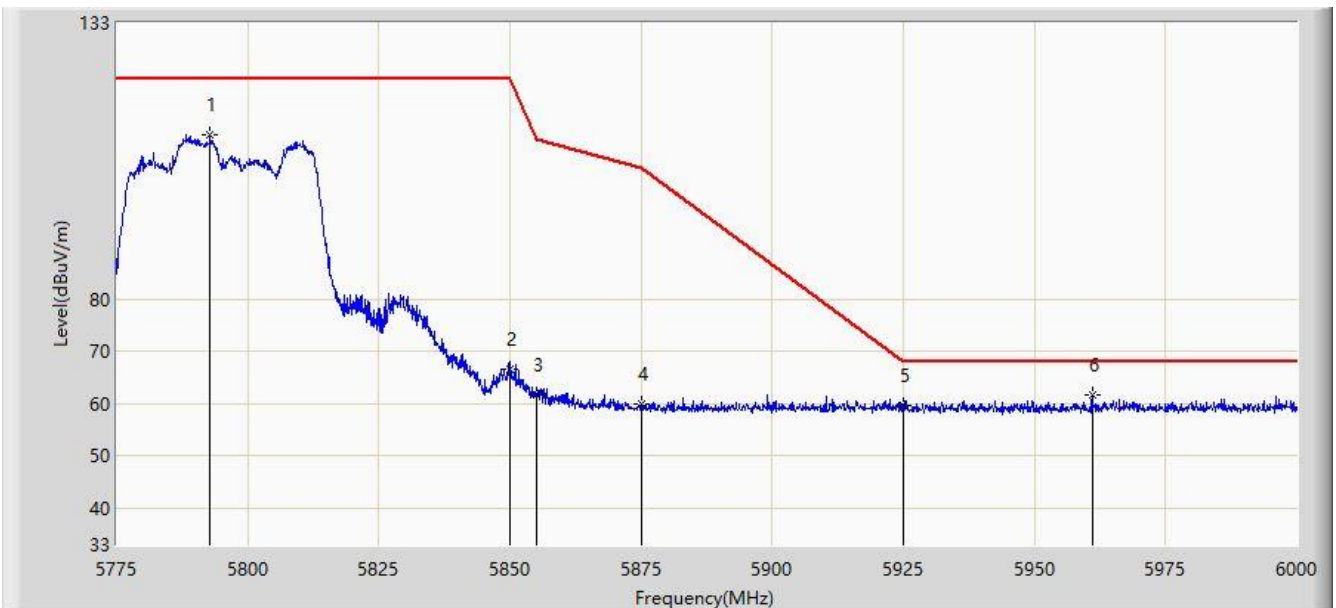


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5792.888        | 111.547                | 106.552              | N/A         | N/A            | 4.995       | PK   |
| 2  |      |      | 5850.000        | 66.640                 | 61.426               | -55.560     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 61.745                 | 56.512               | -49.055     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 59.882                 | 54.572               | -45.318     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.535                 | 54.033               | -8.665      | 68.200         | 5.502       | PK   |
| 6  |      | *    | 5960.962        | 61.622                 | 55.982               | -6.578      | 68.200         | 5.640       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:23 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1321 |                          |

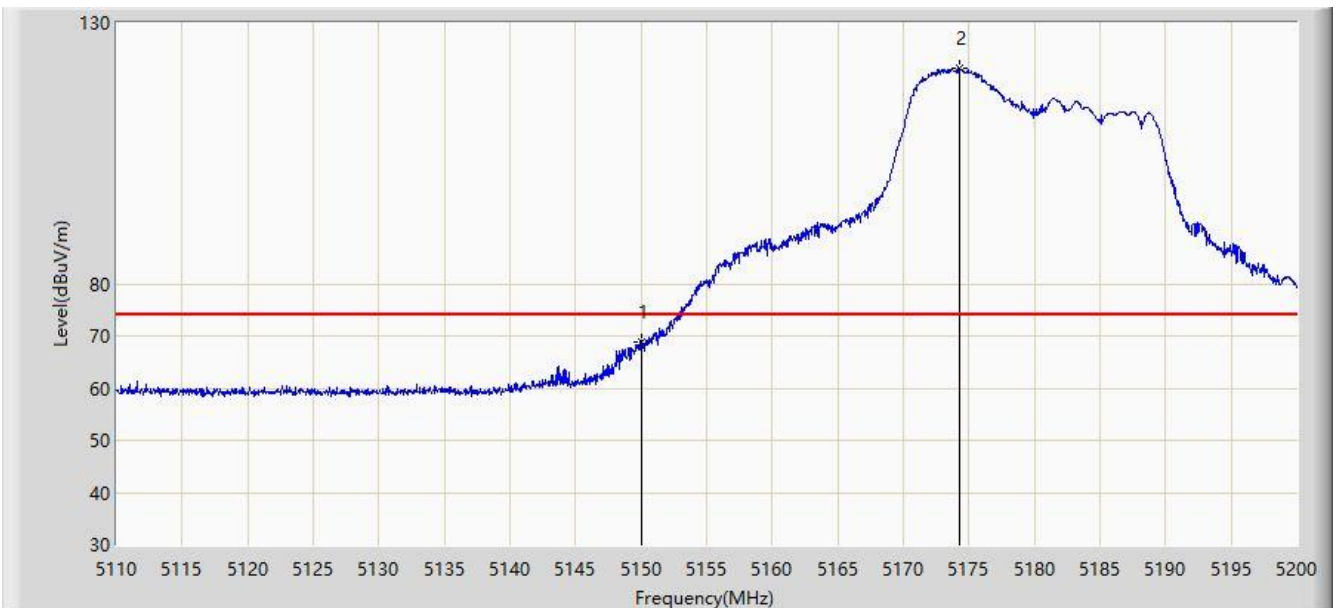


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 68.840                 | 65.194               | -5.160      | 74.000         | 3.646       | PK   |
| 2  |      | *    | 5174.305        | 121.392                | 117.731              | N/A         | N/A            | 3.660       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:29 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1321 |                          |

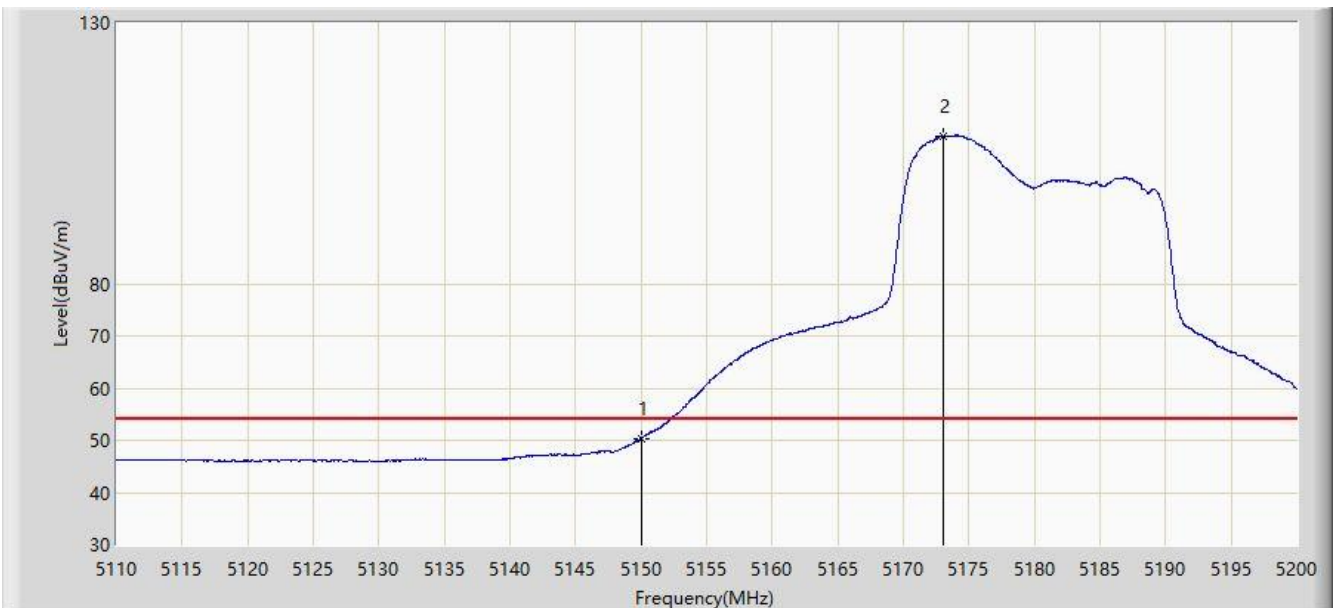


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.398                 | 46.752               | -3.602      | 54.000         | 3.646       | AV   |
| 2  | X    | *    | 5173.090        | 108.280                | 104.620              | N/A         | N/A            | 3.660       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:30 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1321 |                          |

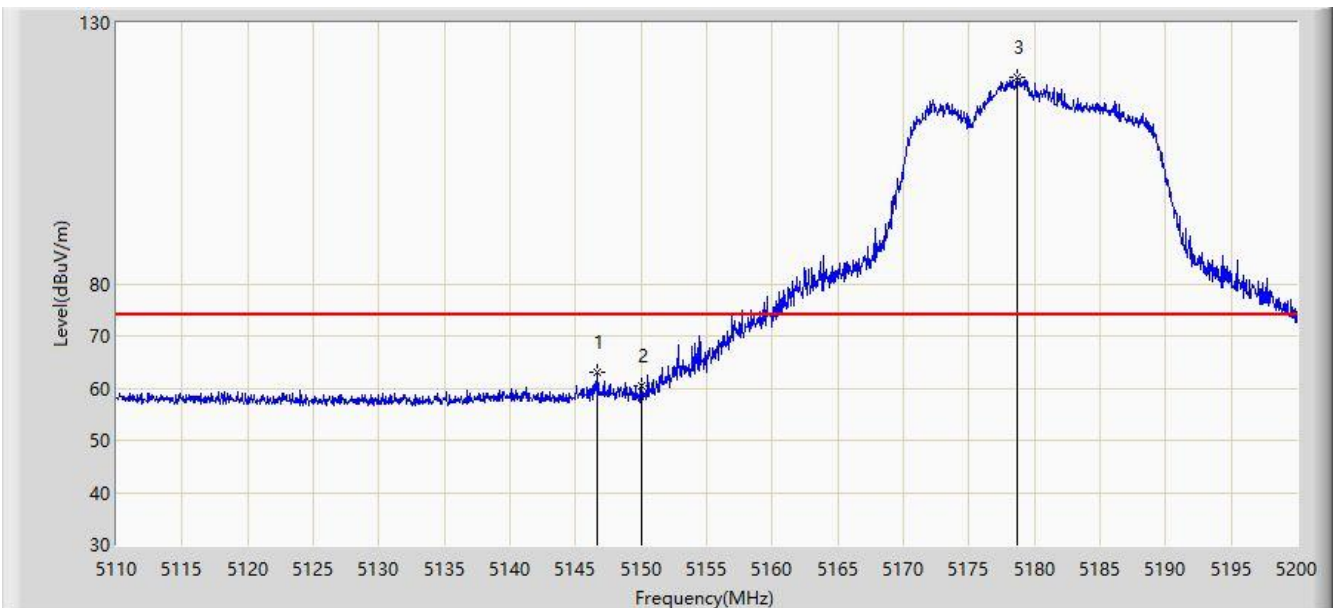


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.630        | 63.065                 | 59.421               | -10.935     | 74.000         | 3.644       | PK   |
| 2  |      |      | 5150.000        | 60.499                 | 56.853               | -13.501     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5178.670        | 119.560                | 115.896              | N/A         | N/A            | 3.664       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:31 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1321 |                          |

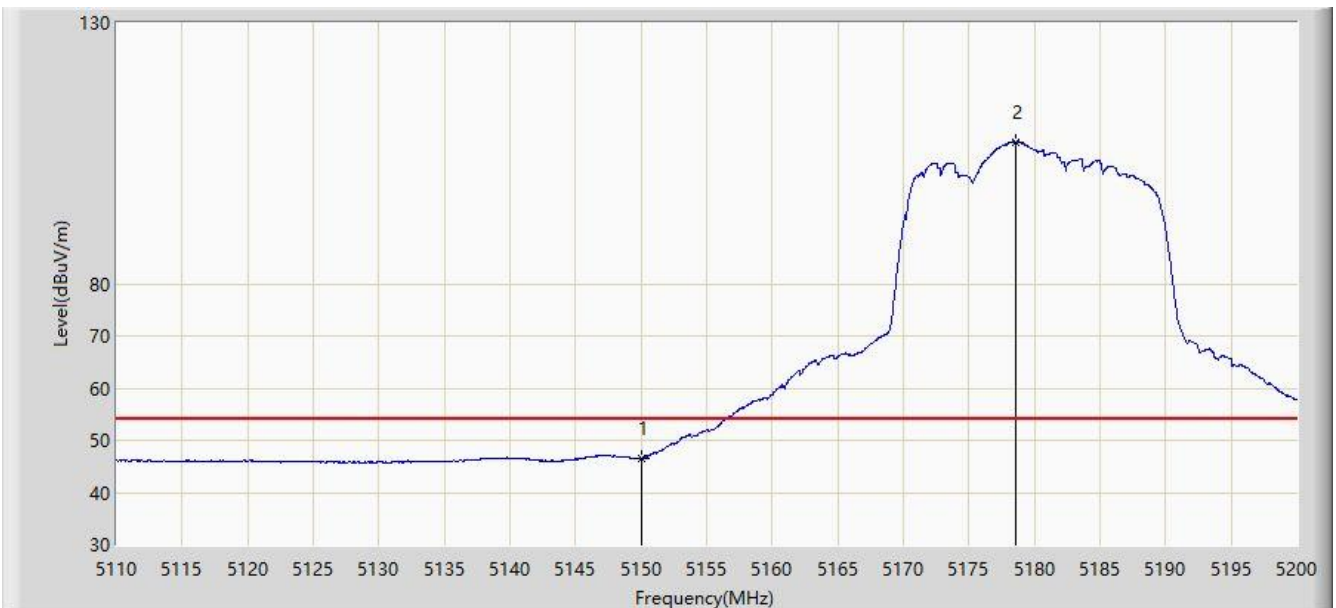


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 46.615                 | 42.969               | -7.385      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5178.625        | 107.233                | 103.569              | N/A         | N/A            | 3.664       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:33 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1321 |                          |

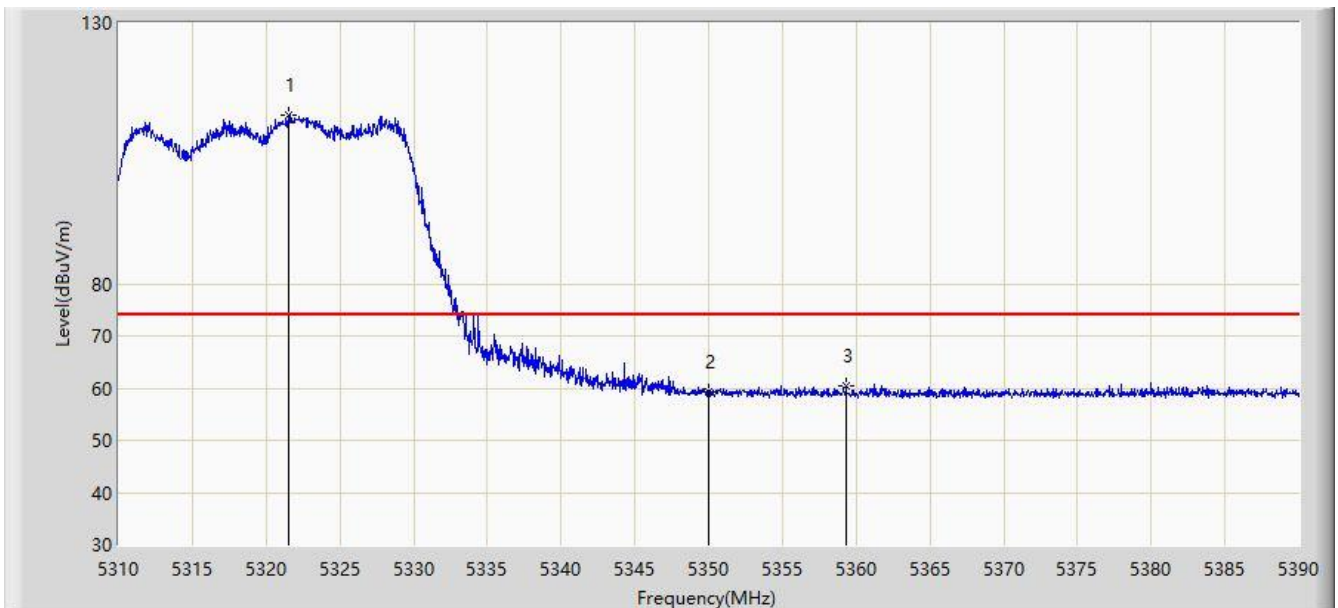


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5321.560        | 112.193                | 108.437              | N/A         | N/A            | 3.756       | PK   |
| 2  |      |      | 5350.000        | 59.245                 | 55.471               | -14.755     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5359.320        | 60.307                 | 56.527               | -13.693     | 74.000         | 3.779       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:33 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1321 |                          |

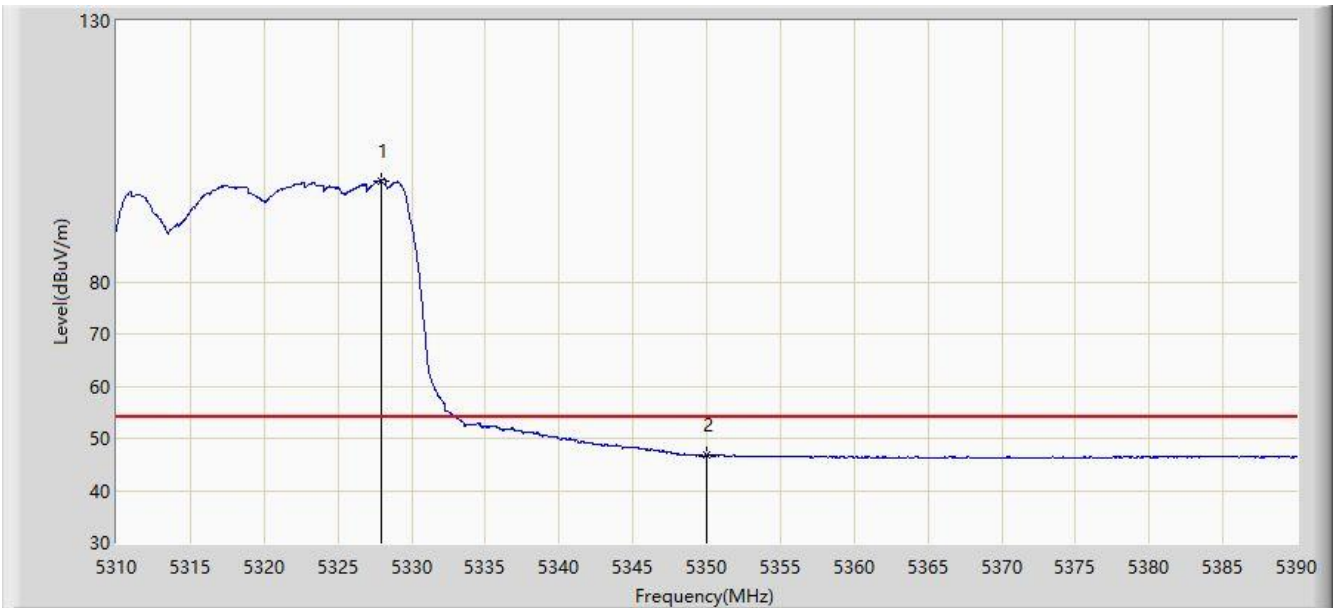


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5327.920        | 99.420                 | 95.659               | N/A         | N/A            | 3.761       | AV   |
| 2  |      |      | 5350.000        | 46.760                 | 42.986               | -7.240      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:34 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1321 |                          |

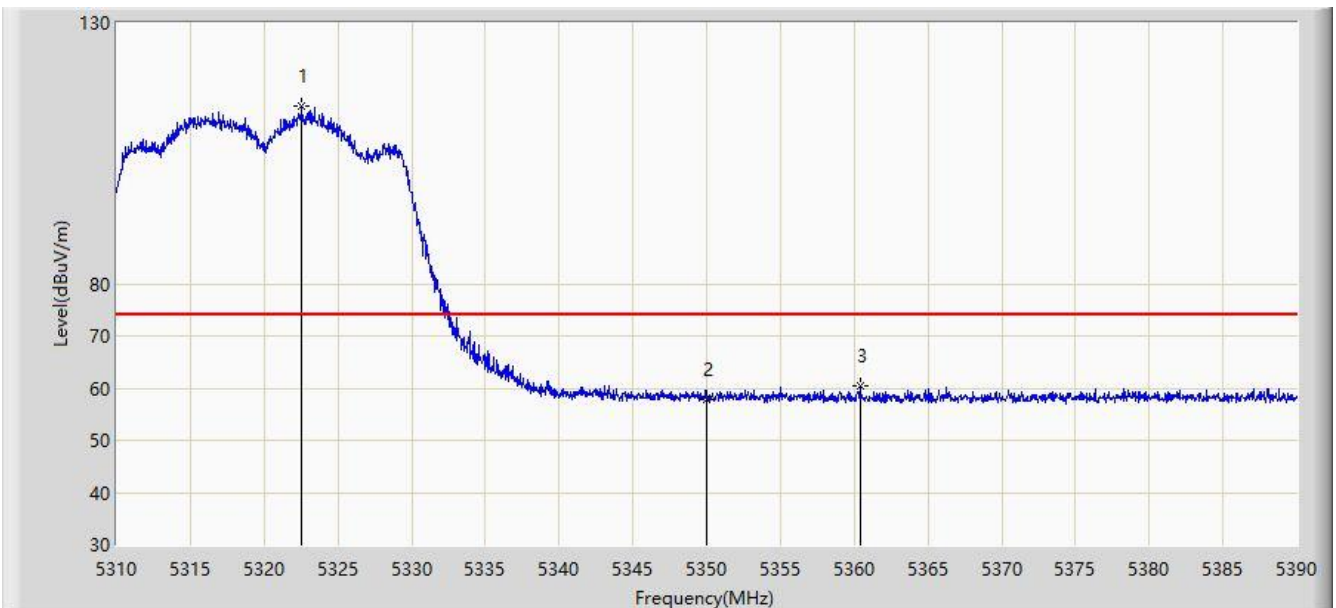


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5322.560        | 113.980                | 110.223              | N/A         | N/A            | 3.757       | PK   |
| 2  |      |      | 5350.000        | 57.732                 | 53.958               | -16.268     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5360.400        | 60.370                 | 56.589               | -13.630     | 74.000         | 3.781       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:34 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1321 |                          |

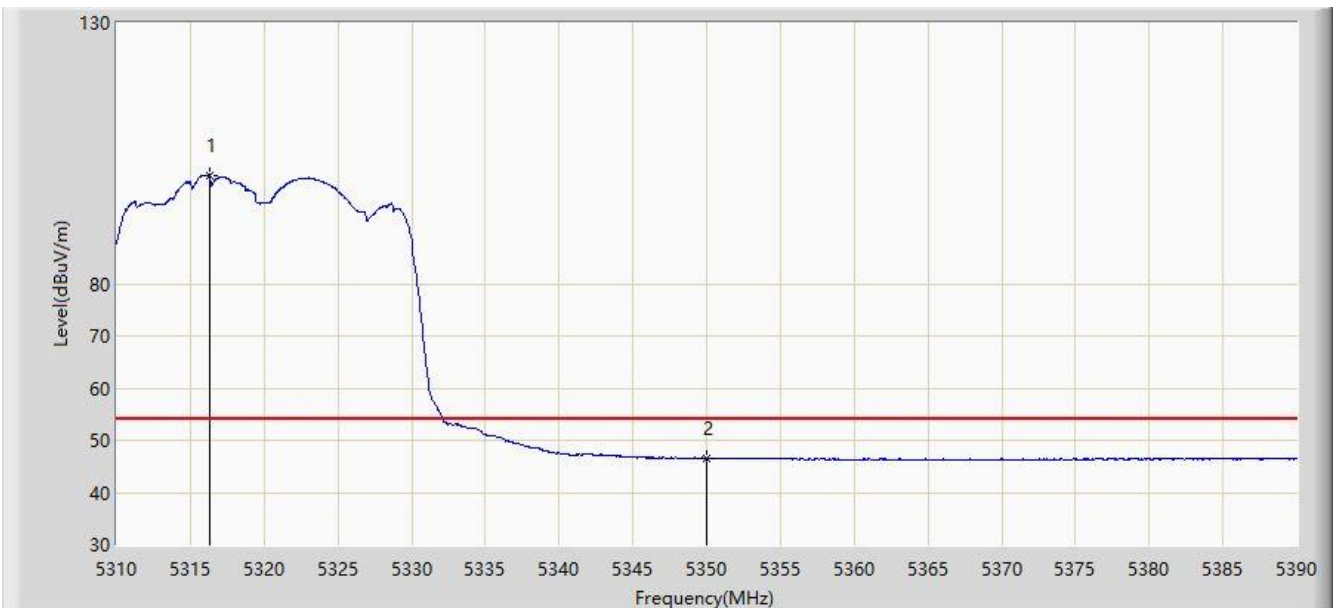


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5316.320        | 100.869                | 97.116               | N/A         | N/A            | 3.753       | AV   |
| 2  |      |      | 5350.000        | 46.501                 | 42.727               | -7.499      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:36 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1321 |                          |

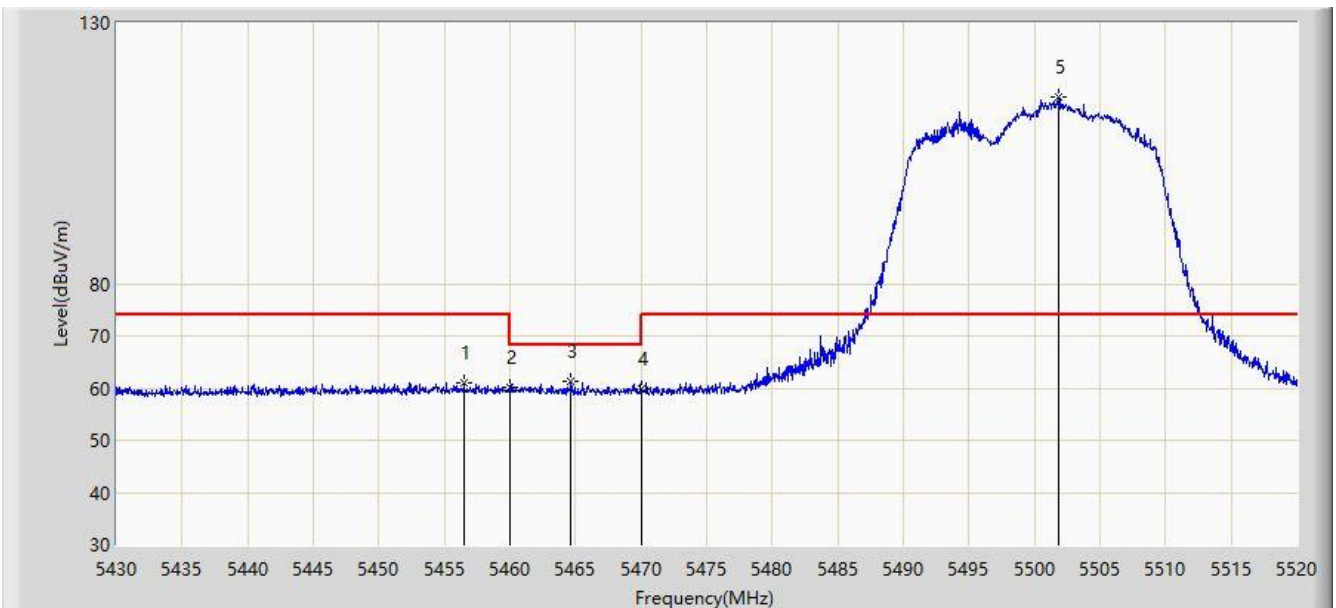


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5456.505        | 60.959                 | 57.117               | -13.041     | 74.000         | 3.842       | PK   |
| 2  |      |      | 5460.000        | 60.002                 | 56.158               | -13.998     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5464.650        | 61.178                 | 57.331               | -7.022      | 68.200         | 3.847       | PK   |
| 4  |      |      | 5470.000        | 59.784                 | 55.933               | -8.416      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5501.820        | 115.769                | 111.884              | N/A         | N/A            | 3.885       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:38 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1321 |                          |

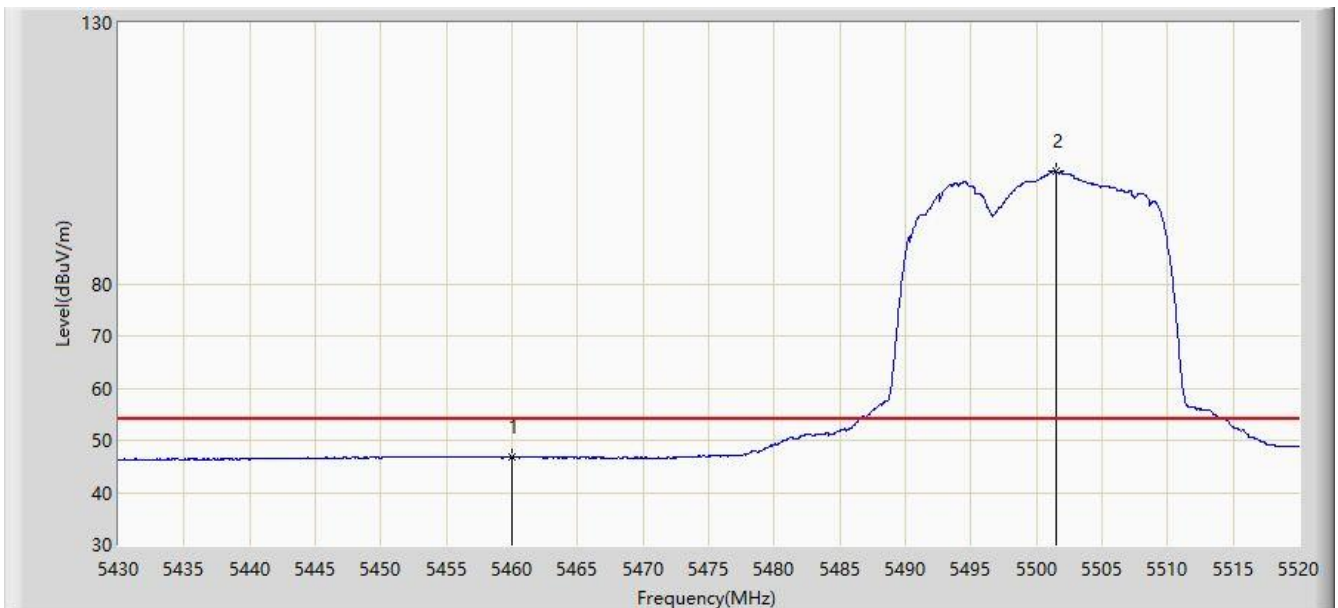


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.865                 | 43.021               | -7.135      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5501.460        | 101.624                | 97.740               | N/A         | N/A            | 3.884       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:39 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1321 |                          |

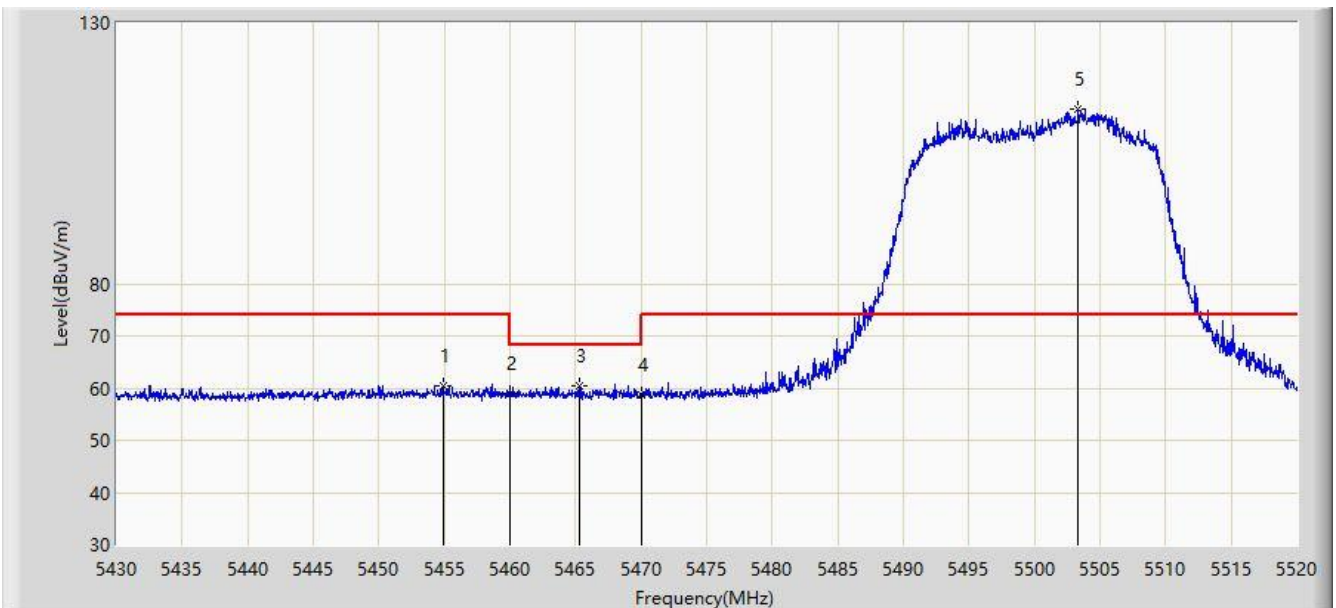


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5454.885        | 60.555                 | 56.714               | -13.445     | 74.000         | 3.841       | PK   |
| 2  |      |      | 5460.000        | 58.880                 | 55.036               | -15.120     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5465.325        | 60.296                 | 56.449               | -7.904      | 68.200         | 3.847       | PK   |
| 4  |      |      | 5470.000        | 58.659                 | 54.808               | -9.541      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5503.305        | 113.475                | 109.588              | N/A         | N/A            | 3.887       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:39 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1321 |                          |

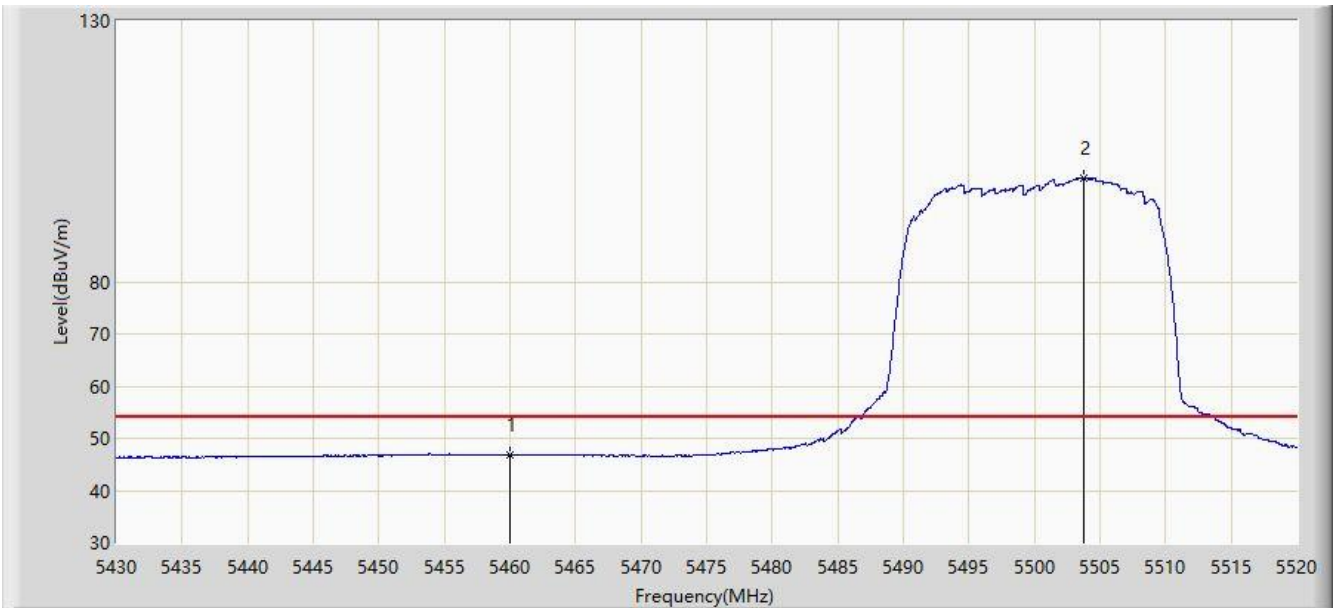


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.855                 | 43.011               | -7.145      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5503.710        | 99.781                 | 95.893               | N/A         | N/A            | 3.887       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:40 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz with OAW-AP1321 |                          |

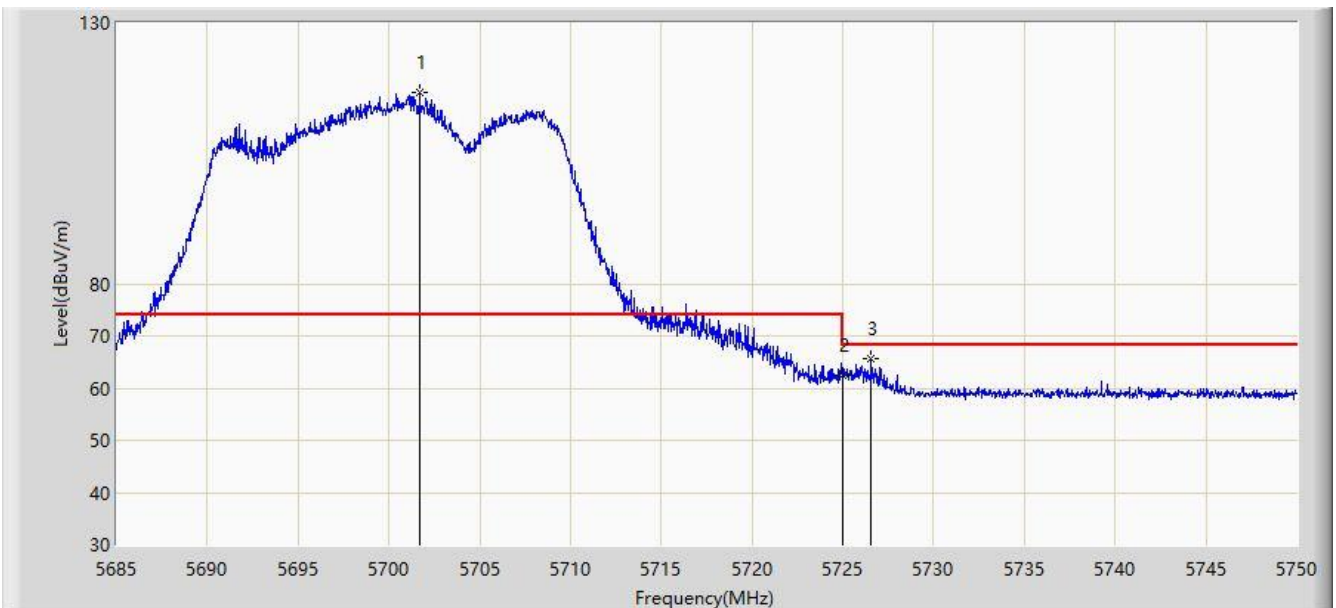


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5701.705        | 116.768                | 112.123              | N/A         | N/A            | 4.644       | PK   |
| 2  |      |      | 5725.000        | 62.510                 | 57.776               | -5.690      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5726.567        | 65.515                 | 60.775               | -2.685      | 68.200         | 4.740       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:41 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz with OAW-AP1321 |                          |

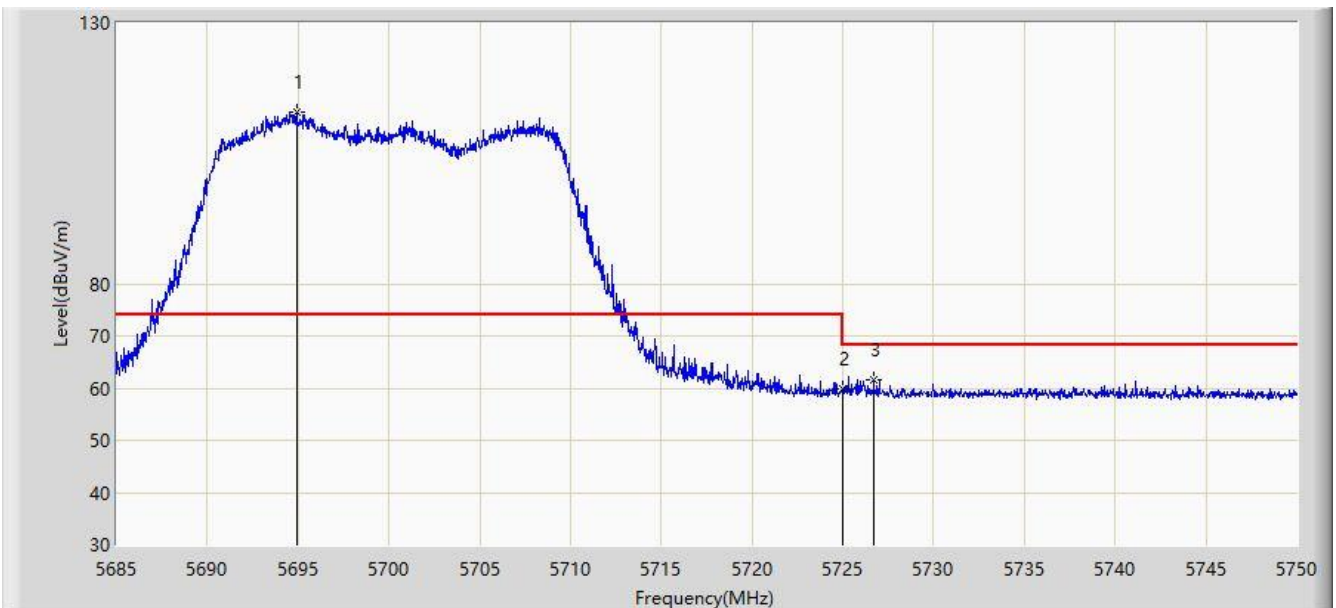


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5694.913        | 112.927                | 108.309              | N/A         | N/A            | 4.619       | PK   |
| 2  |      |      | 5725.000        | 59.852                 | 55.118               | -8.348      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5726.697        | 61.565                 | 56.825               | -6.635      | 68.200         | 4.740       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:43 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz with OAW-AP1321 |                          |

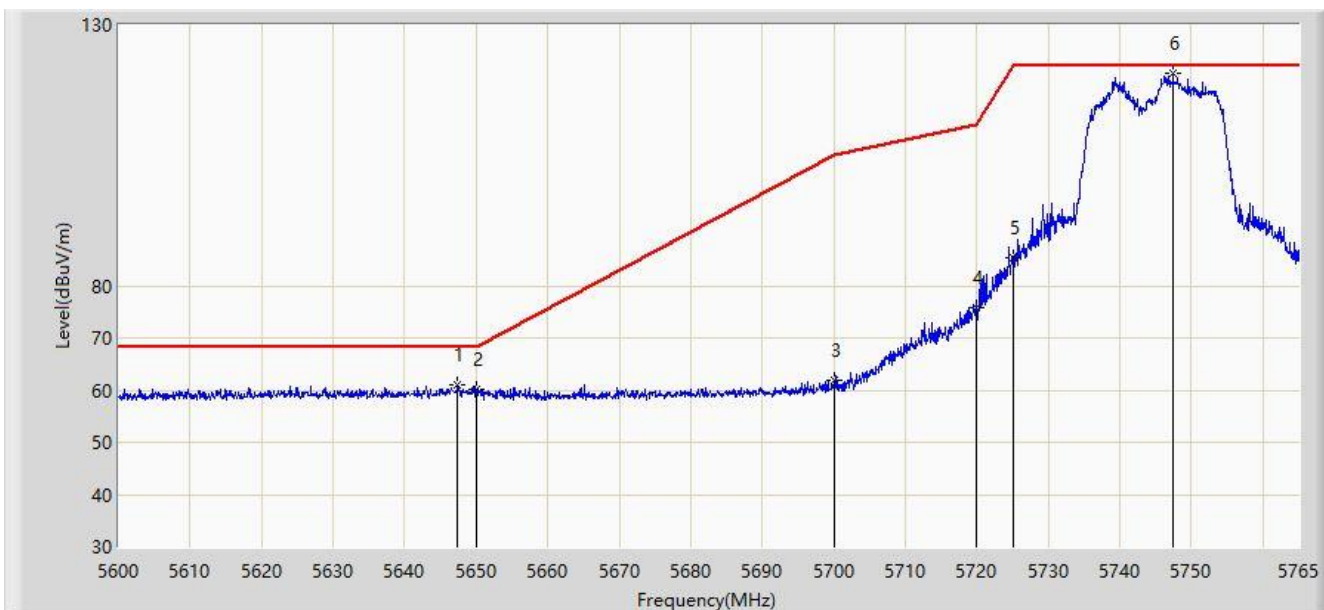


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5647.437        | 60.986                 | 56.549               | -7.214      | 68.200         | 4.436       | PK   |
| 2  |      |      | 5650.000        | 60.109                 | 55.663               | -8.091      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 61.830                 | 57.192               | -43.370     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 75.668                 | 70.953               | -35.132     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 85.224                 | 80.490               | -36.976     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5747.428        | 120.587                | 115.767              | N/A         | N/A            | 4.820       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:44 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz with OAW-AP1321 |                          |

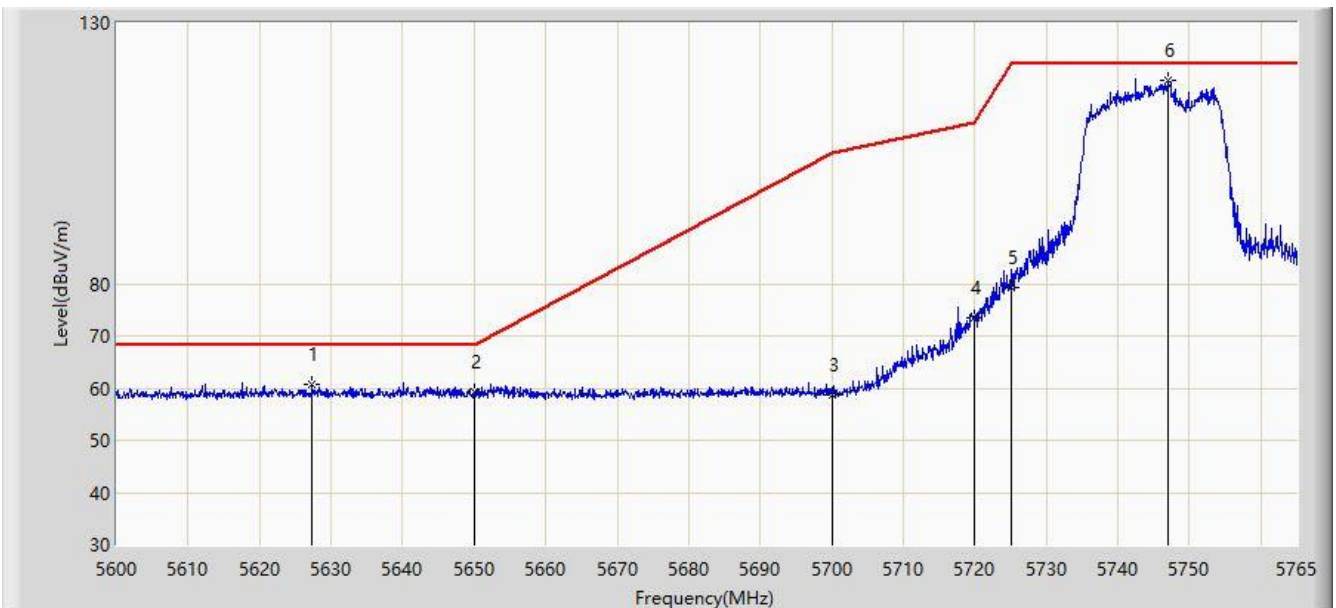


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5627.308        | 60.645                 | 56.286               | -7.555      | 68.200         | 4.359       | PK   |
| 2  |      |      | 5650.000        | 59.216                 | 54.770               | -8.984      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 58.773                 | 54.135               | -46.427     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 73.465                 | 68.750               | -37.335     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 79.297                 | 74.563               | -42.903     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5747.098        | 119.032                | 114.213              | N/A         | N/A            | 4.818       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:45 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz with OAW-AP1321 |                          |

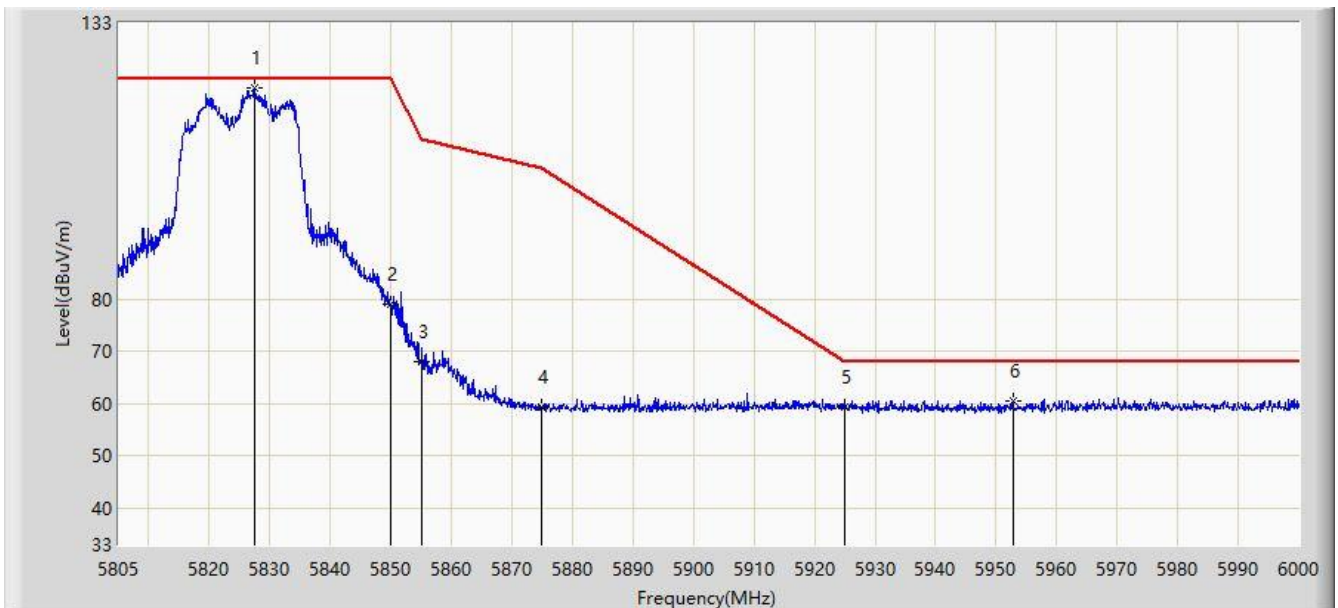


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5827.425        | 120.446                | 115.319              | N/A         | N/A            | 5.127       | PK   |
| 2  |      |      | 5850.000        | 78.995                 | 73.781               | -43.205     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 68.089                 | 62.856               | -42.711     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 59.280                 | 53.970               | -45.920     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.274                 | 53.772               | -8.926      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5952.810        | 60.491                 | 54.882               | -7.709      | 68.200         | 5.609       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/01 - 20:46 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz with OAW-AP1321 |                          |

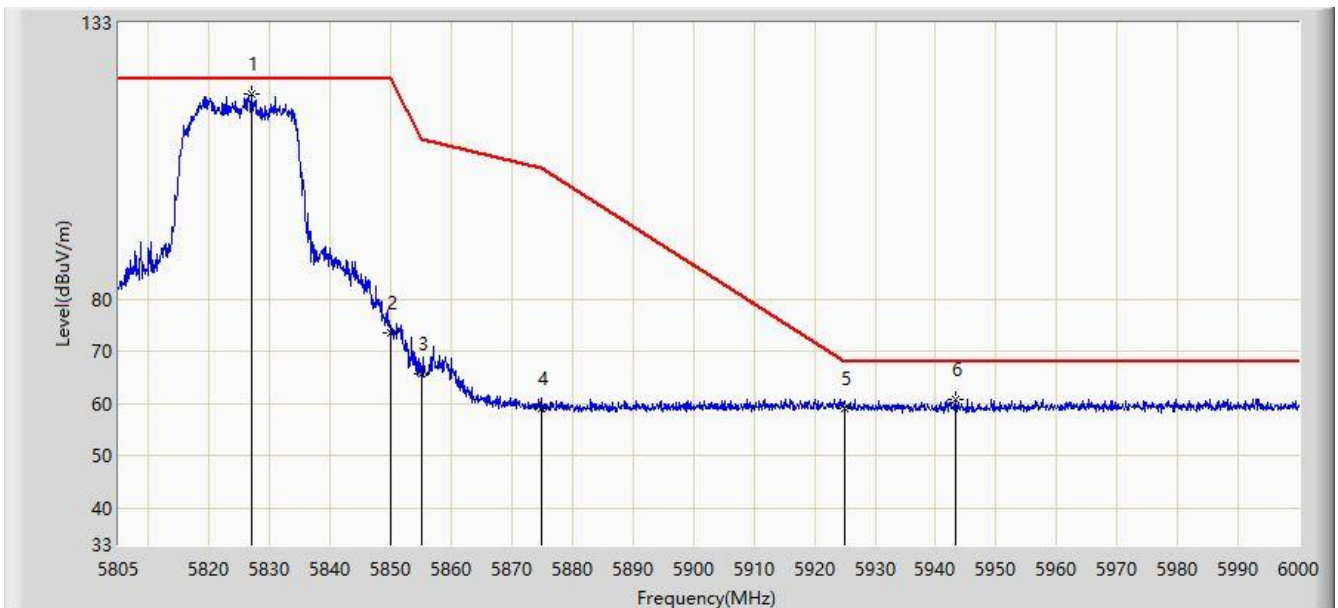


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5827.035        | 119.243                | 114.117              | N/A         | N/A            | 5.126       | PK   |
| 2  |      |      | 5850.000        | 73.521                 | 68.307               | -48.679     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 65.811                 | 60.578               | -44.989     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 59.176                 | 53.866               | -46.024     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.231                 | 53.729               | -8.969      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5943.353        | 60.844                 | 55.271               | -7.356      | 68.200         | 5.573       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:03 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1321 |                          |

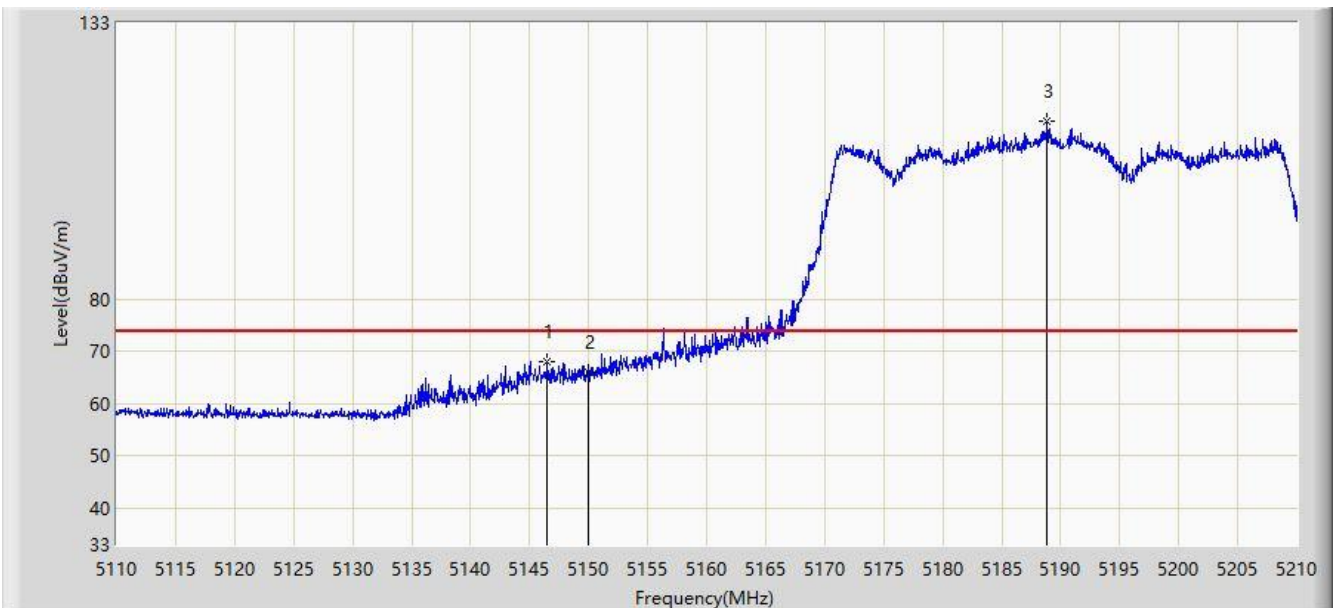


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.500        | 67.983                 | 64.339               | -6.017      | 74.000         | 3.644       | PK   |
| 2  |      |      | 5150.000        | 66.081                 | 62.435               | -7.919      | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5188.850        | 114.230                | 110.559              | N/A         | N/A            | 3.671       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 10:53 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1321 |                          |

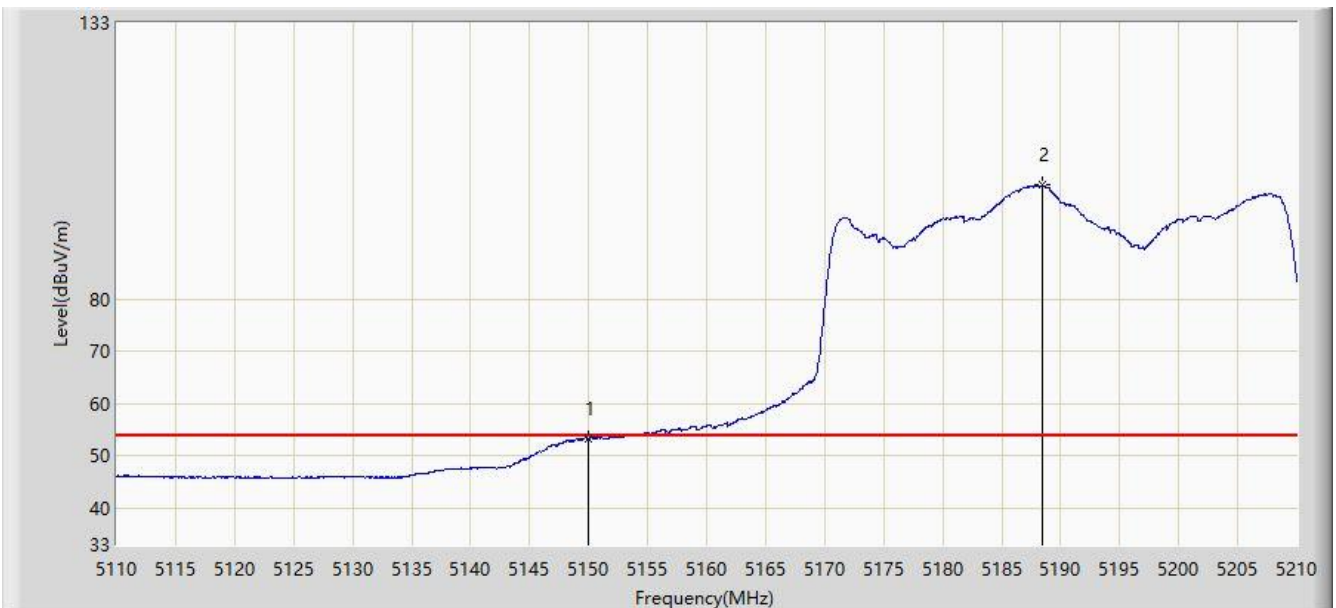


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.153                 | 49.507               | -0.847      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5188.500        | 101.890                | 98.219               | N/A         | N/A            | 3.671       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 10:54 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1321 |                          |

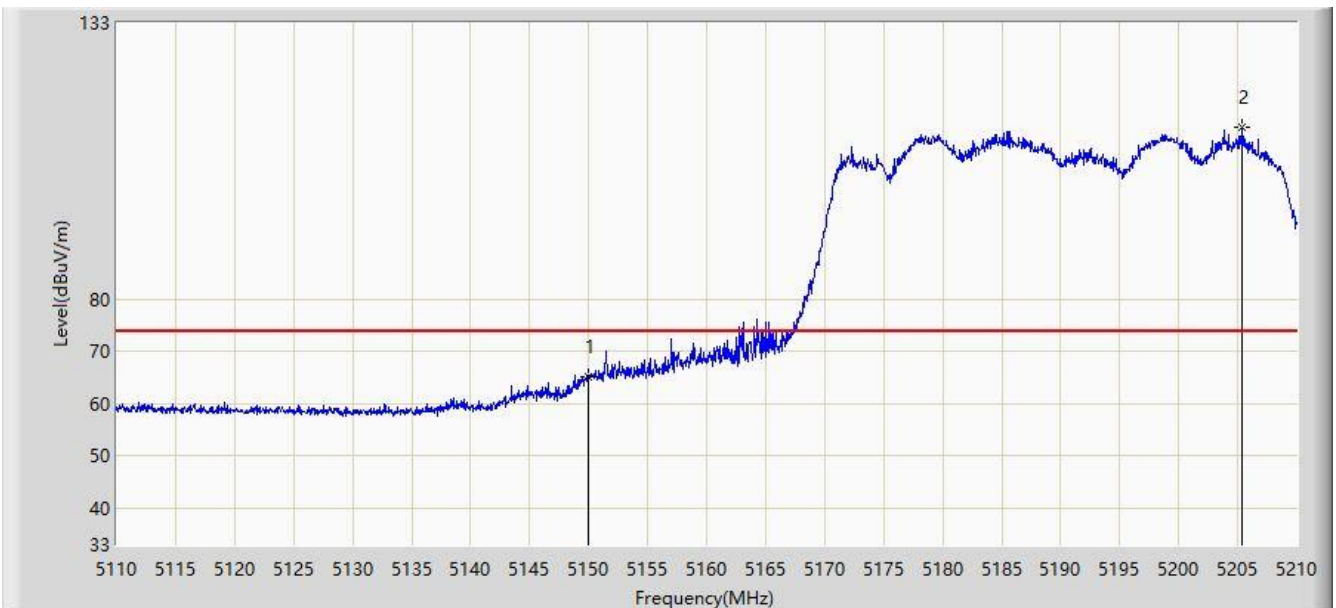


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 65.119                 | 61.473               | -8.881      | 74.000         | 3.646       | PK   |
| 2  |      | *    | 5205.350        | 113.001                | 109.319              | N/A         | N/A            | 3.682       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:00 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1321 |                          |

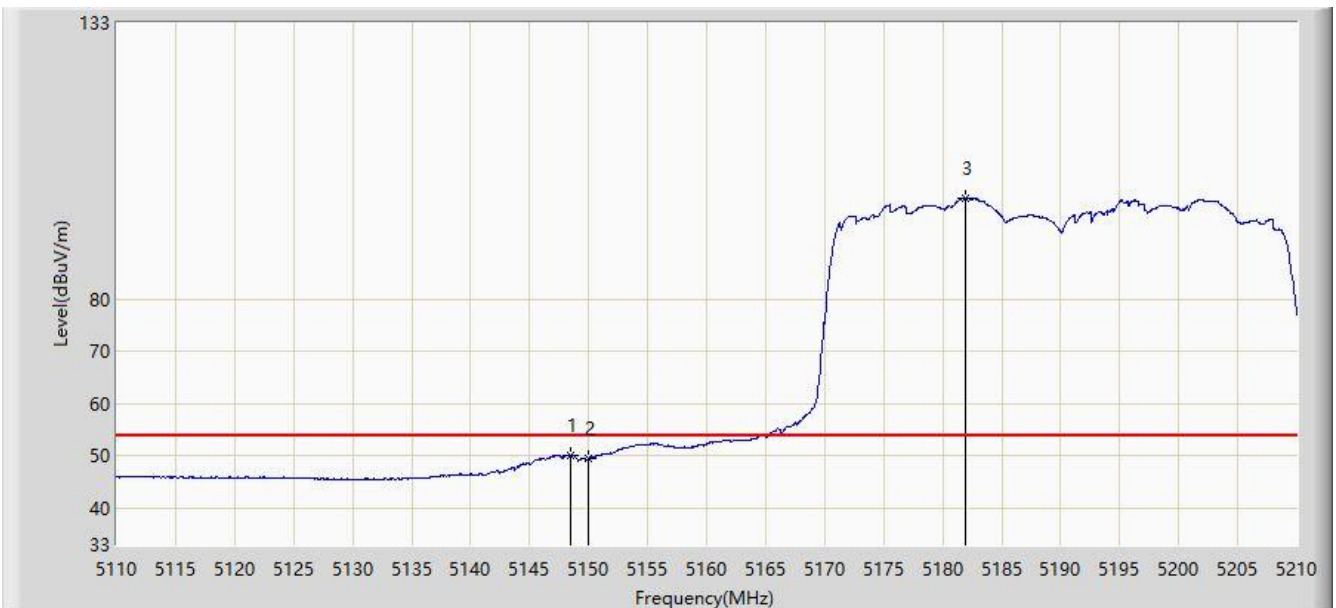


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.500        | 50.044                 | 46.399               | -3.956      | 54.000         | 3.645       | AV   |
| 2  |      |      | 5150.000        | 49.526                 | 45.880               | -4.474      | 54.000         | 3.646       | AV   |
| 3  |      | *    | 5181.950        | 99.310                 | 95.644               | N/A         | N/A            | 3.666       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:06 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1321 |                          |

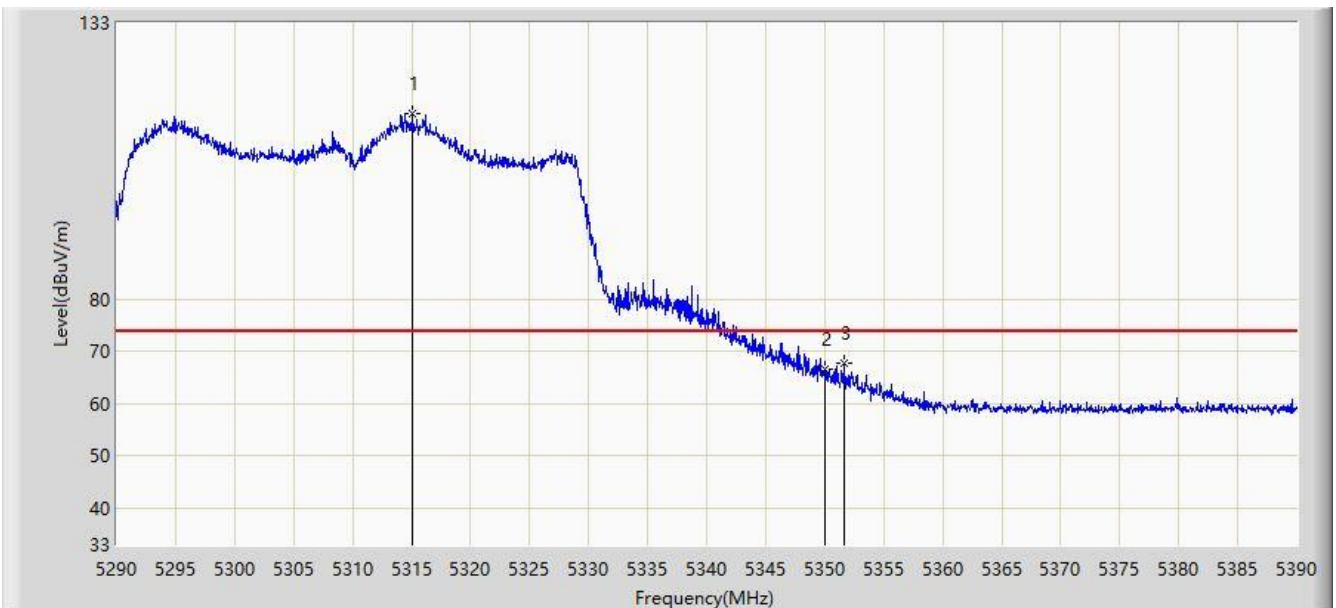


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5315.050        | 115.485                | 111.733              | N/A         | N/A            | 3.751       | PK   |
| 2  |      |      | 5350.000        | 66.741                 | 62.967               | -7.259      | 74.000         | 3.774       | PK   |
| 3  |      |      | 5351.700        | 67.756                 | 63.981               | -6.244      | 74.000         | 3.775       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:08 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1321 |                          |

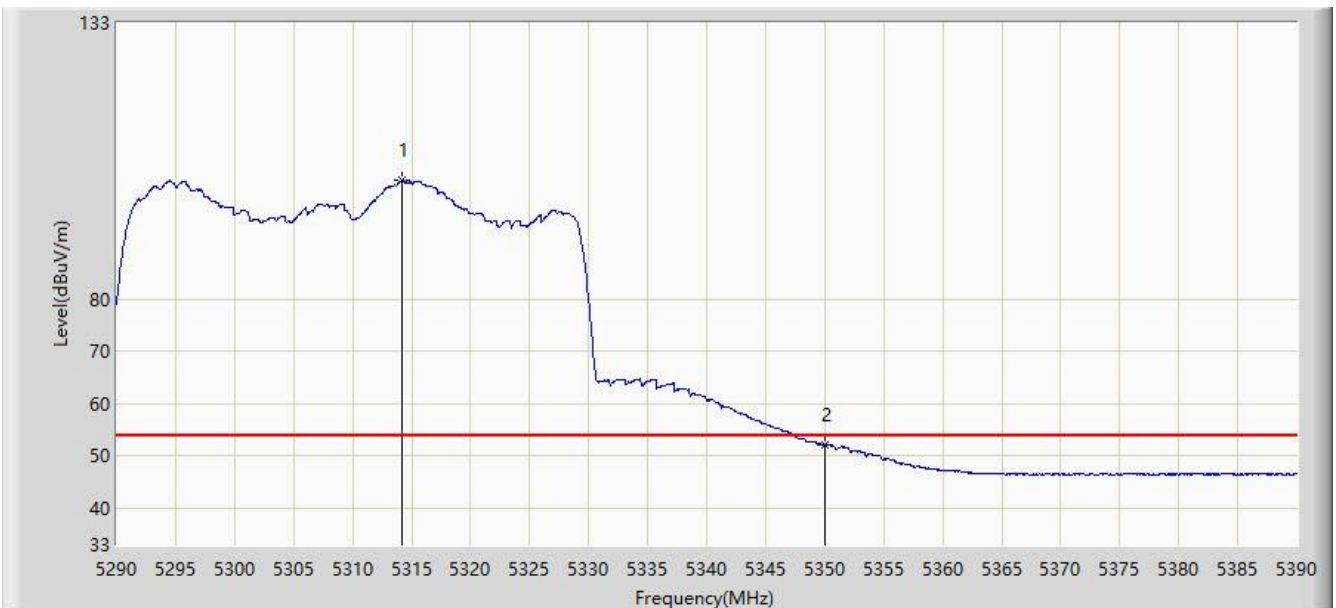


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5314.200        | 102.786                | 99.035               | N/A         | N/A            | 3.752       | AV   |
| 2  |      |      | 5350.000        | 52.225                 | 48.451               | -1.775      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:09 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1321 |                          |

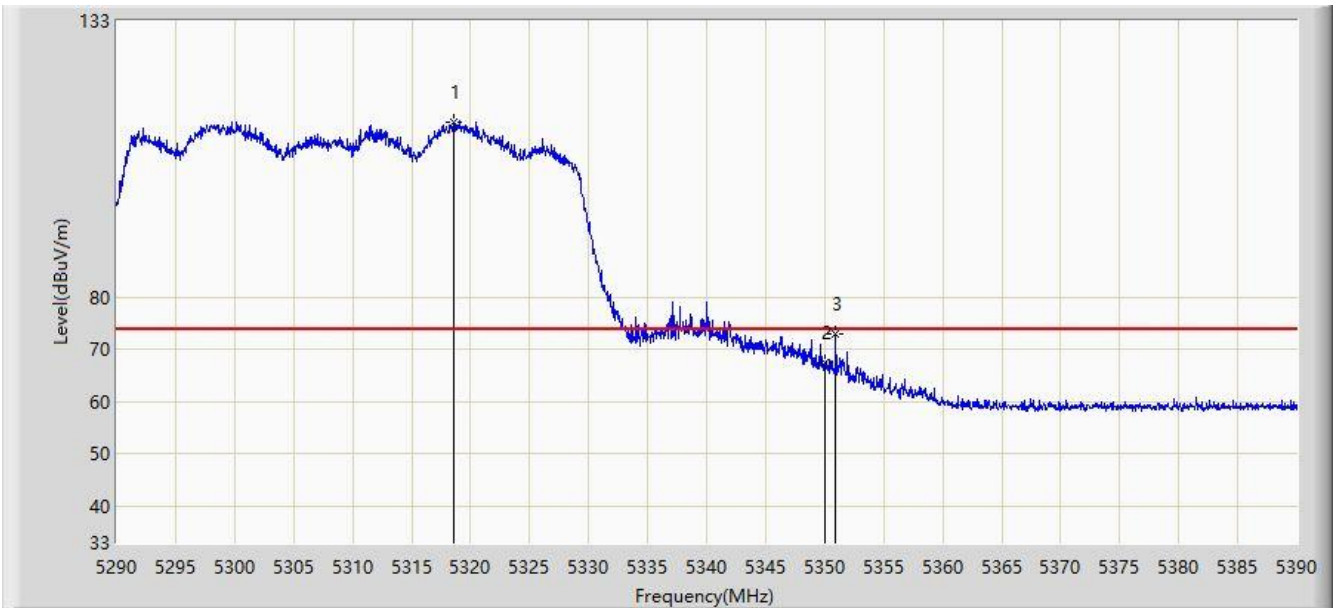


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5318.550        | 113.672                | 109.918              | N/A         | N/A            | 3.755       | PK   |
| 2  |      |      | 5350.000        | 67.606                 | 63.832               | -6.394      | 74.000         | 3.774       | PK   |
| 3  |      |      | 5350.950        | 72.879                 | 69.105               | -1.121      | 74.000         | 3.774       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:12 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1321 |                          |

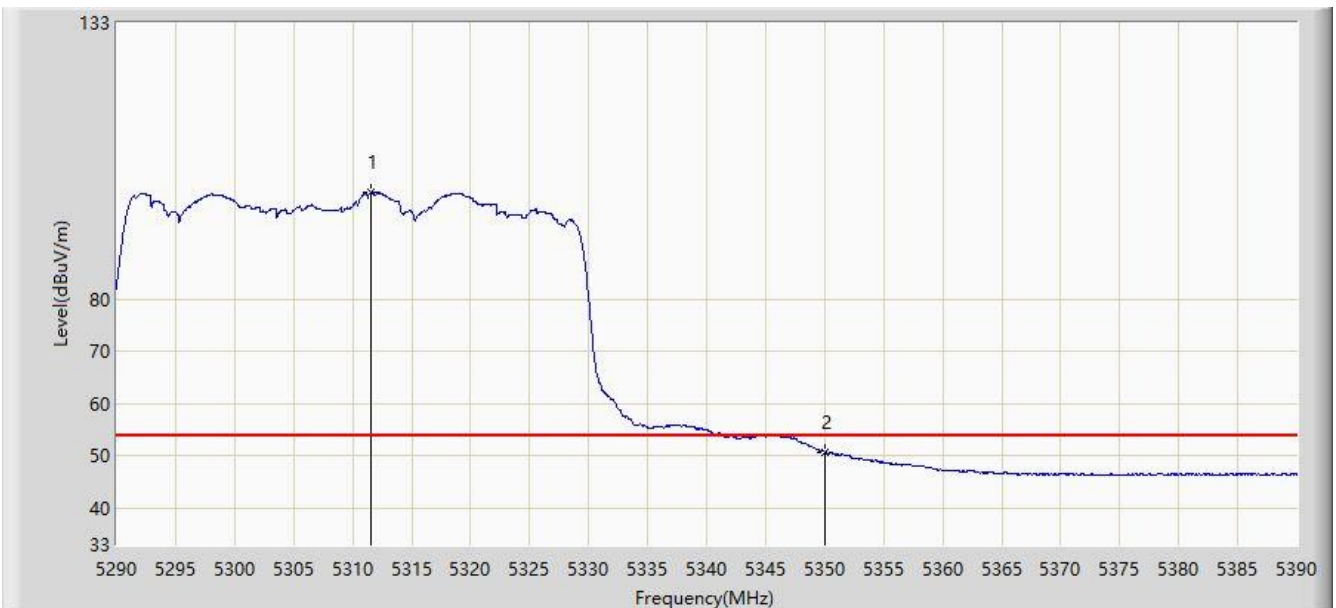


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5311.600        | 100.556                | 96.806               | N/A         | N/A            | 3.749       | AV   |
| 2  |      |      | 5350.000        | 50.683                 | 46.909               | -3.317      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:19 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1321 |                          |

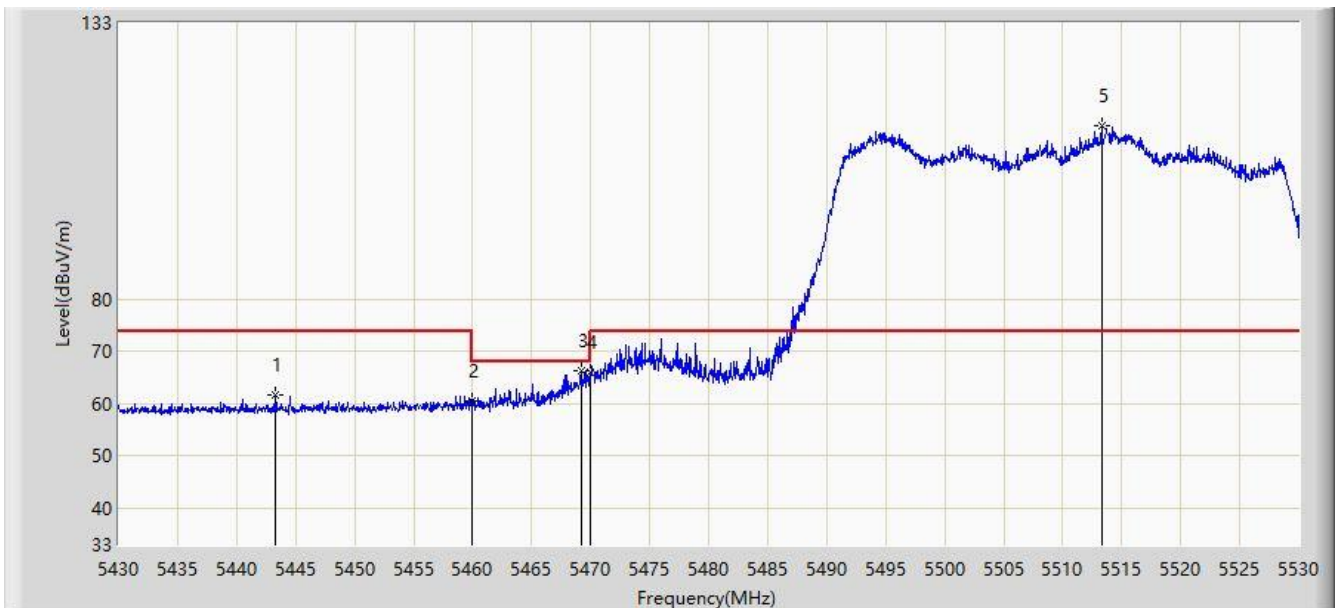


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5443.250        | 61.617                 | 57.784               | -12.383     | 74.000         | 3.833       | PK   |
| 2  |      |      | 5460.000        | 60.546                 | 56.702               | -13.454     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5469.200        | 66.464                 | 62.614               | -1.736      | 68.200         | 3.850       | PK   |
| 4  |      |      | 5470.000        | 65.944                 | 62.093               | -2.256      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5513.300        | 113.326                | 109.405              | N/A         | N/A            | 3.921       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:21 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1321 |                          |

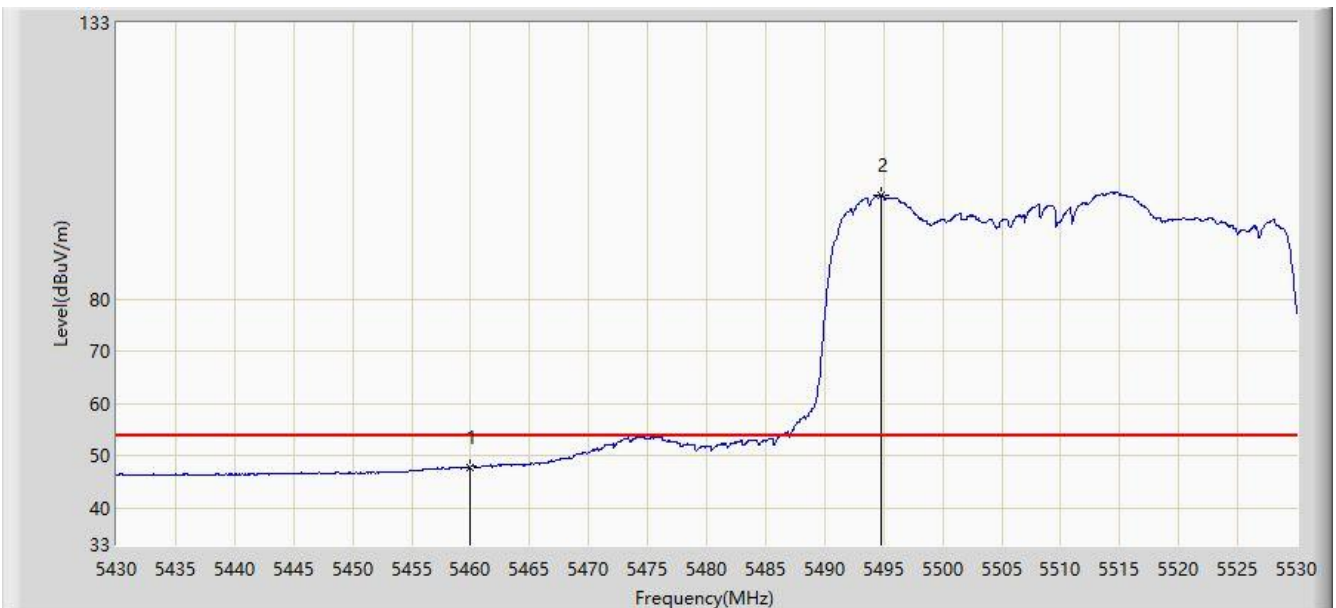


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.848                 | 44.004               | -6.152      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5494.800        | 100.010                | 96.136               | N/A         | N/A            | 3.874       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:22 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1321 |                          |

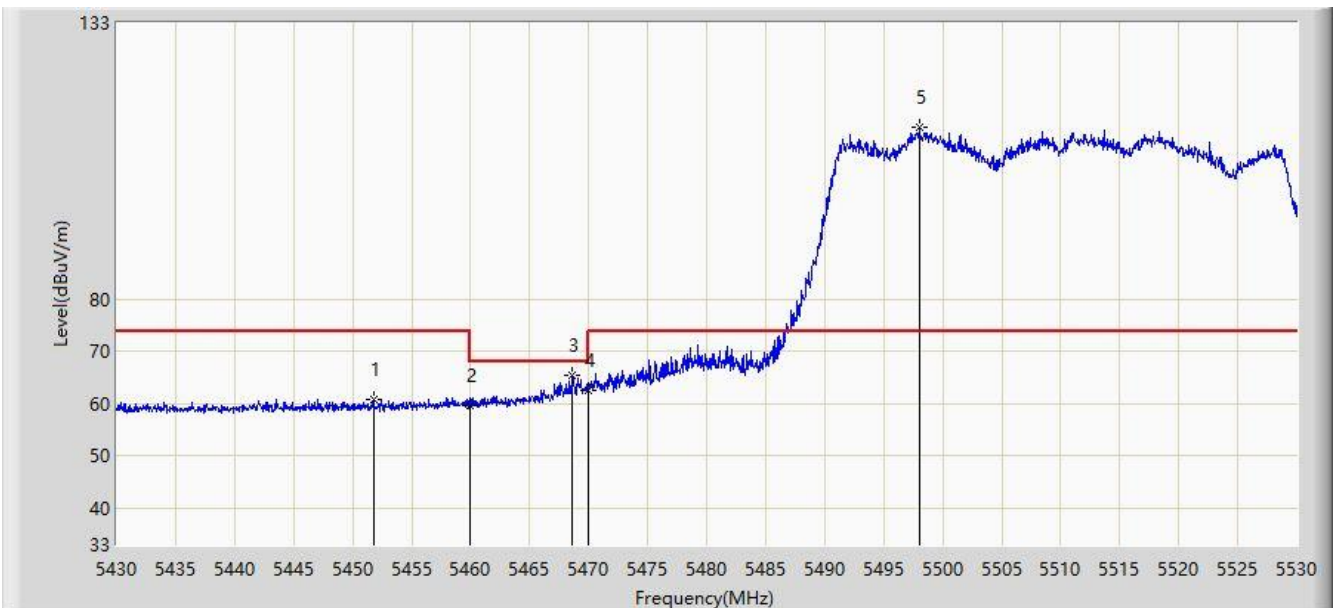


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5451.750        | 60.961                 | 57.122               | -13.039     | 74.000         | 3.839       | PK   |
| 2  |      |      | 5460.000        | 59.537                 | 55.693               | -14.463     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5468.600        | 65.320                 | 61.470               | -2.880      | 68.200         | 3.849       | PK   |
| 4  |      |      | 5470.000        | 62.695                 | 58.844               | -5.505      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5498.000        | 112.909                | 109.030              | N/A         | N/A            | 3.879       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:24 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1321 |                          |

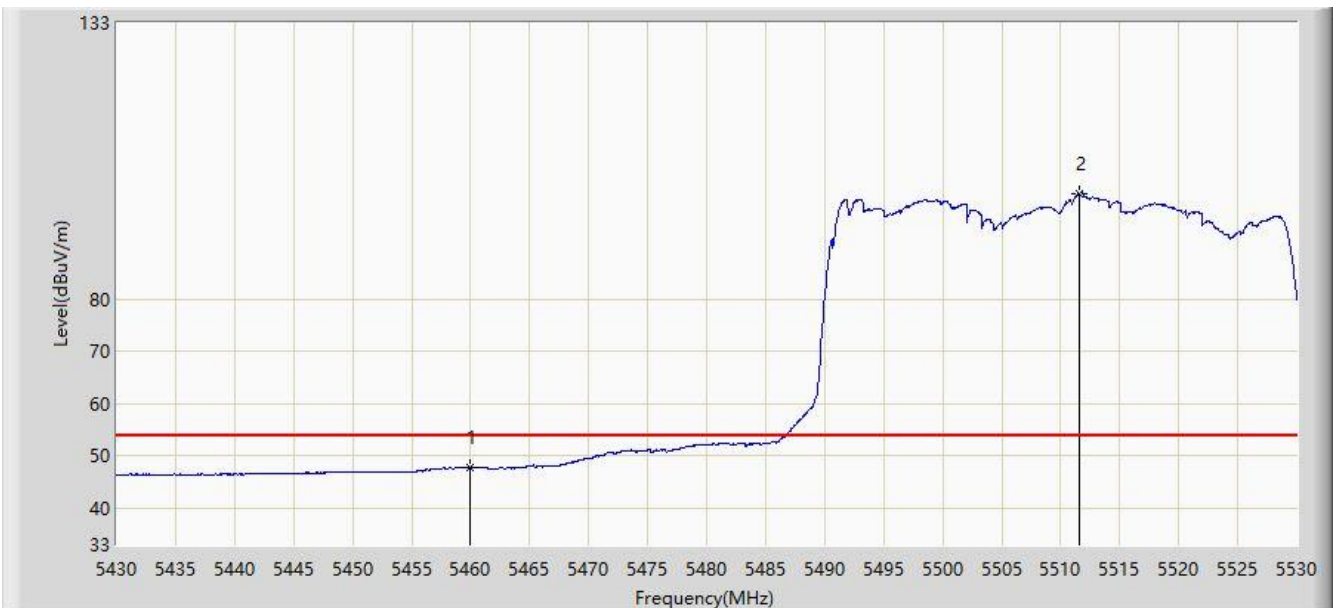


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.890                 | 44.046               | -6.110      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5511.600        | 100.314                | 96.399               | N/A         | N/A            | 3.915       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:25 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz with OAW-AP1321 |                          |

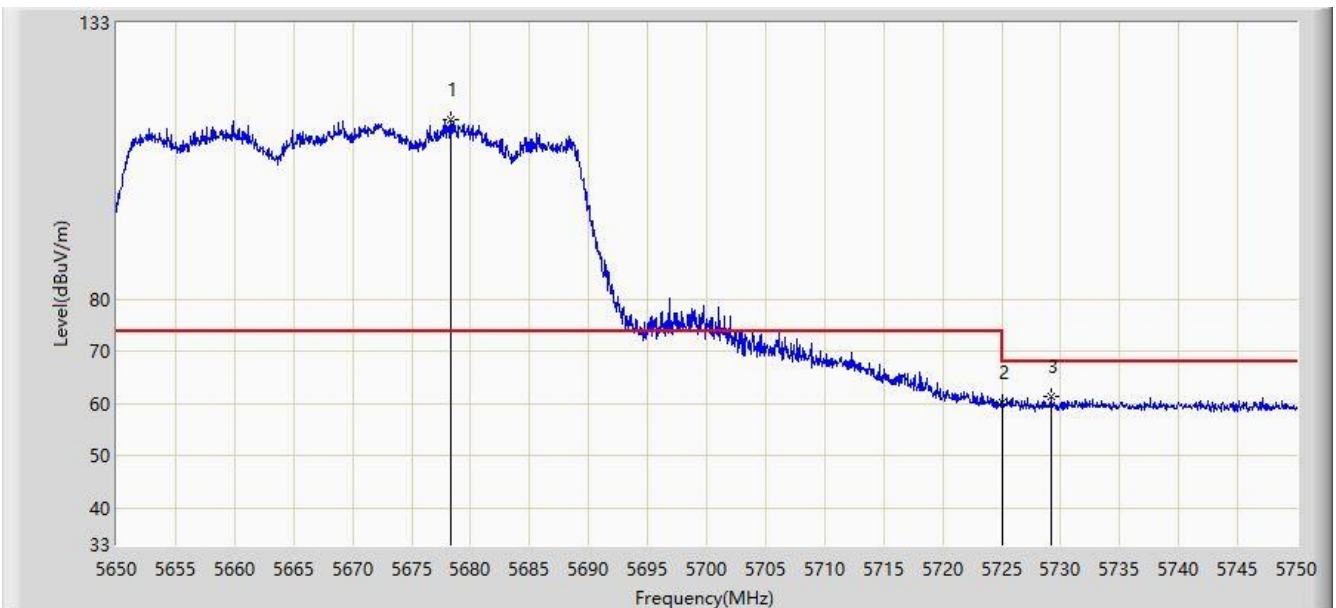


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5678.300        | 114.466                | 109.911              | N/A         | N/A            | 4.555       | PK   |
| 2  |      |      | 5725.000        | 60.285                 | 55.551               | -7.915      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5729.150        | 61.398                 | 56.648               | -6.802      | 68.200         | 4.750       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:30 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz with OAW-AP1321 |                          |

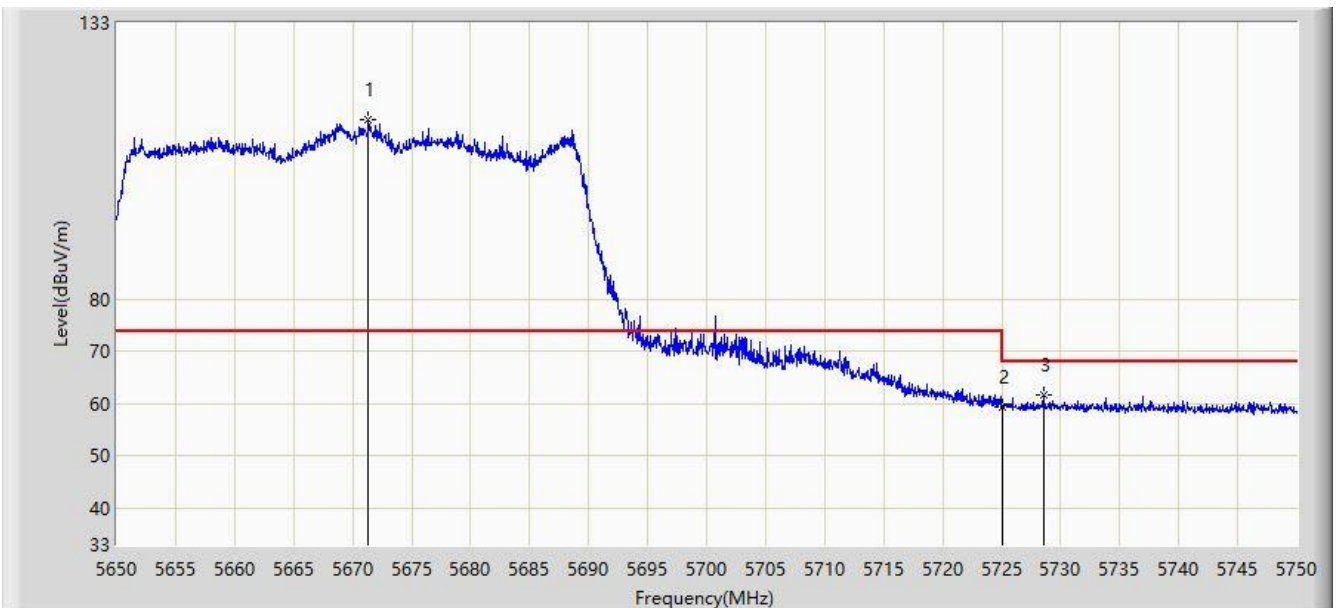


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5671.350        | 114.540                | 110.012              | N/A         | N/A            | 4.528       | PK   |
| 2  |      |      | 5725.000        | 59.417                 | 54.683               | -8.783      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5728.550        | 61.669                 | 56.922               | -6.531      | 68.200         | 4.747       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:32 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz with OAW-AP1321 |                          |

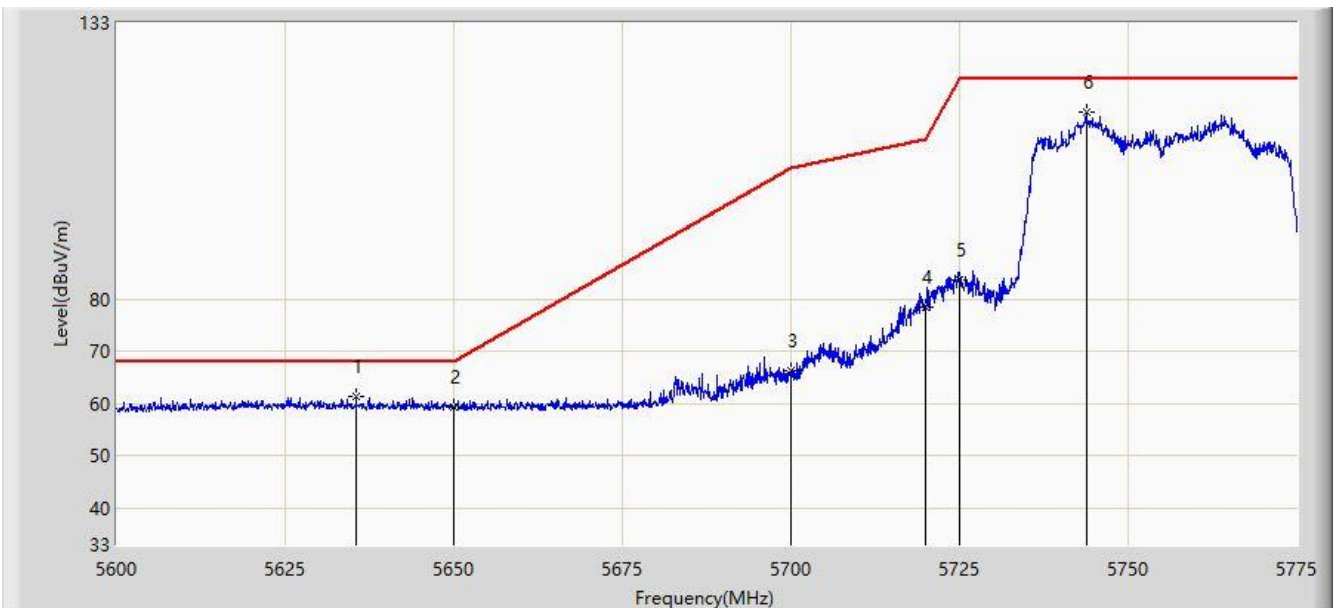


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5635.525        | 61.356                 | 56.965               | -6.844      | 68.200         | 4.391       | PK   |
| 2  |      |      | 5650.000        | 59.381                 | 54.935               | -8.819      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 66.412                 | 61.774               | -38.788     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 78.483                 | 73.768               | -32.317     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 83.805                 | 79.071               | -38.395     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5743.850        | 115.931                | 111.125              | N/A         | N/A            | 4.807       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:36 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz with OAW-AP1321 |                          |

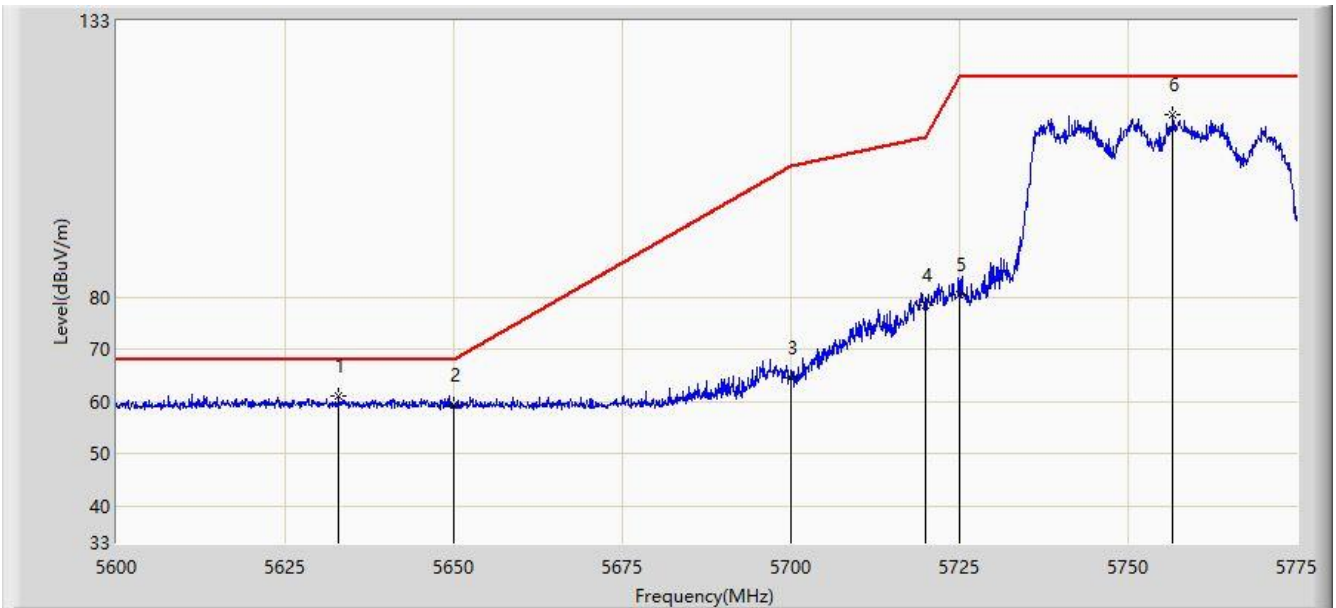


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5632.987        | 61.247                 | 56.866               | -6.953      | 68.200         | 4.381       | PK   |
| 2  |      |      | 5650.000        | 59.399                 | 54.953               | -8.801      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 64.712                 | 60.074               | -40.488     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 78.545                 | 73.830               | -32.255     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 80.528                 | 75.794               | -41.672     | 122.200        | 4.734       | PK   |
| 6  |      |      | 5756.625        | 114.893                | 110.038              | N/A         | N/A            | 4.855       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:39 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz with OAW-AP1321 |                          |

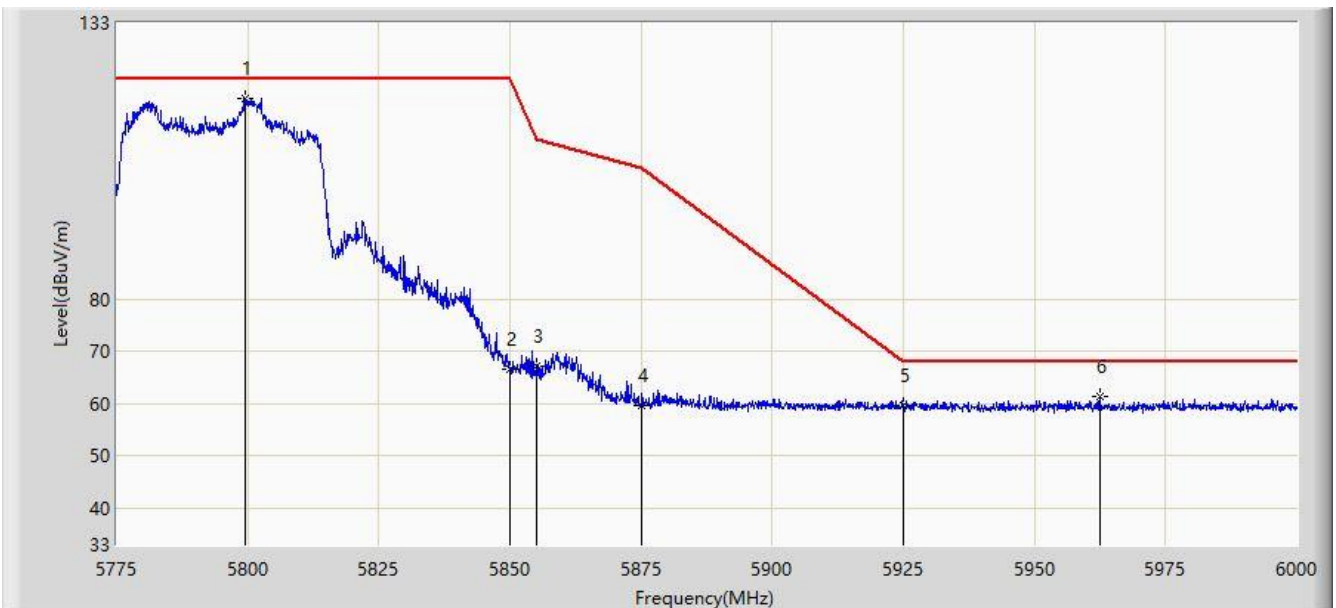


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5799.638        | 118.605                | 113.584              | N/A         | N/A            | 5.021       | PK   |
| 2  |      |      | 5850.000        | 66.762                 | 61.548               | -55.438     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 67.261                 | 62.028               | -43.539     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 59.575                 | 54.265               | -45.625     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.740                 | 54.238               | -8.460      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5962.425        | 61.261                 | 55.615               | -6.939      | 68.200         | 5.646       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 11:40 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz with OAW-AP1321 |                          |

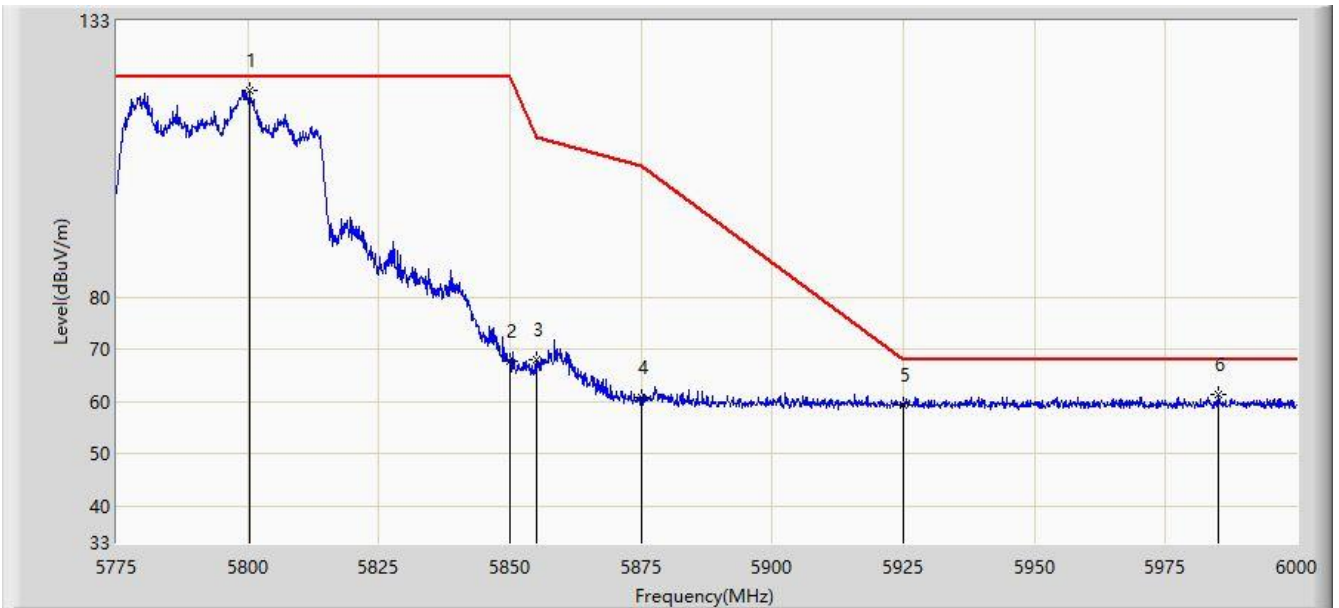


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5800.425        | 119.628                | 114.604              | N/A         | N/A            | 5.025       | PK   |
| 2  |      |      | 5850.000        | 67.814                 | 62.600               | -54.386     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 67.974                 | 62.741               | -42.826     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 60.781                 | 55.471               | -44.419     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.517                 | 54.015               | -8.683      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5984.925        | 61.453                 | 55.721               | -6.747      | 68.200         | 5.732       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 12:01 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1321 |                          |

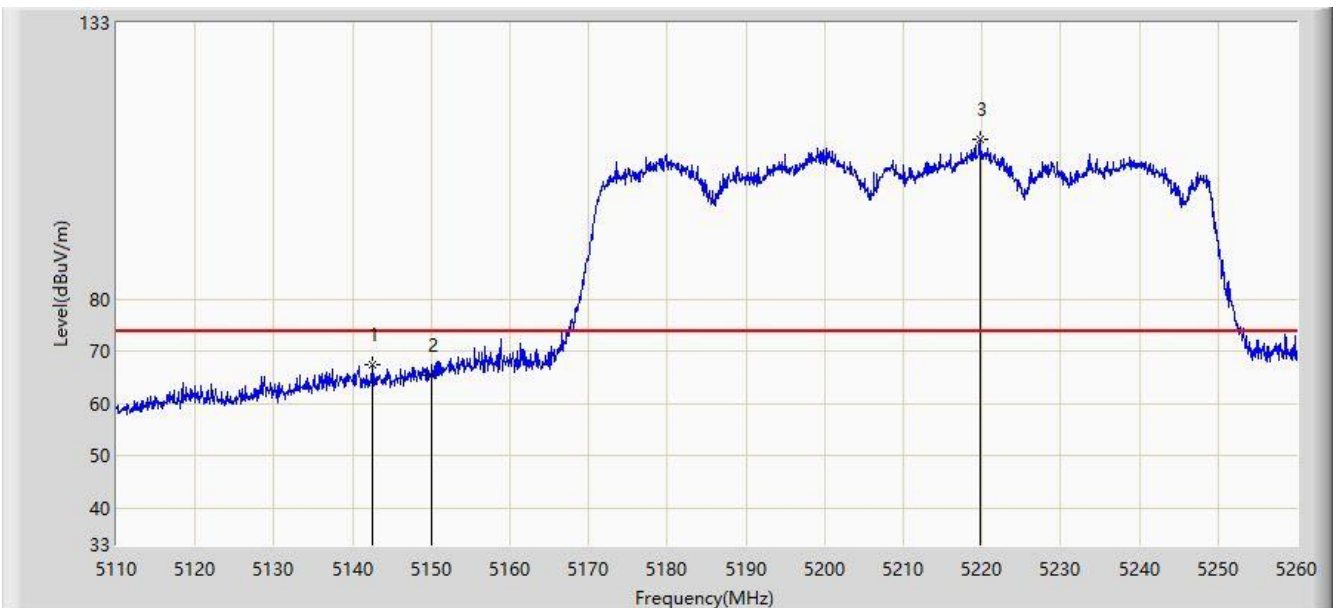


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5142.475        | 67.380                 | 63.739               | -6.620      | 74.000         | 3.641       | PK   |
| 2  |      |      | 5150.000        | 65.444                 | 61.798               | -8.556      | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5219.725        | 110.777                | 107.086              | N/A         | N/A            | 3.691       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 12:00 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1321 |                          |

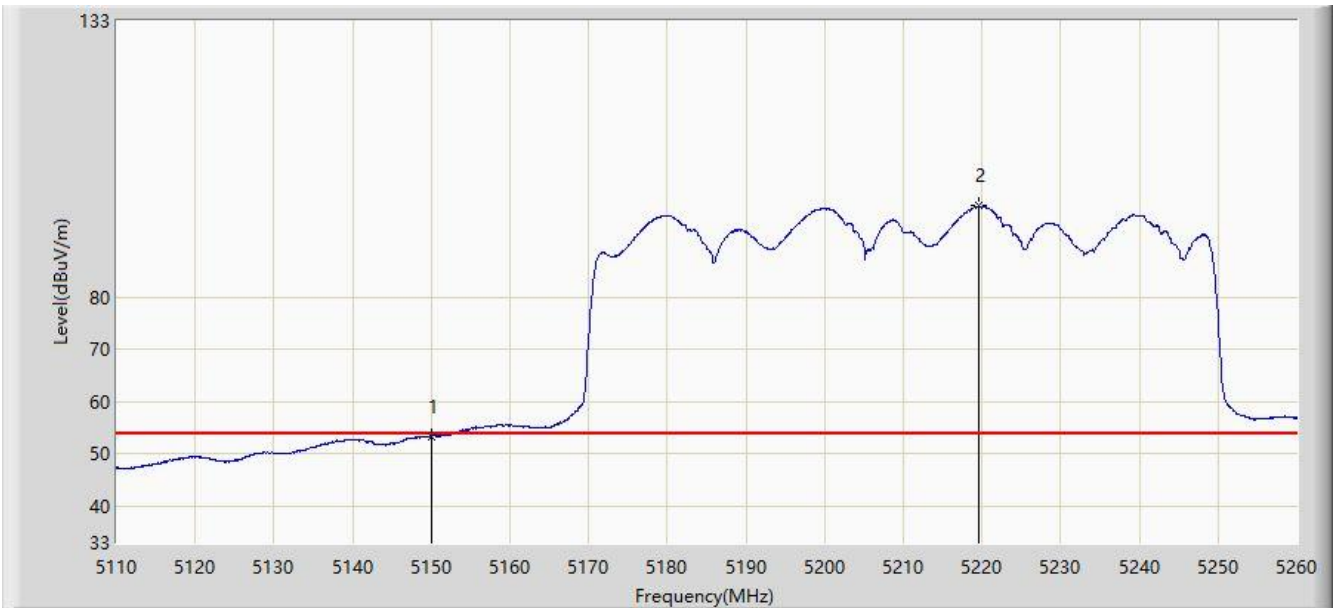

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.385                 | 49.739               | -0.615      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5219.500        | 97.518                 | 93.827               | N/A         | N/A            | 3.691       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)