

Site: AC1	Time: 2020/04/21 - 15:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5590 MHz with OAW-AP1361D (Beam-Forming Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7494.000	44.060	32.358	-29.940	74.000	11.702	PK
2			7944.500	45.206	33.033	-22.994	68.200	12.172	PK
3			8378.000	44.372	31.971	-29.628	74.000	12.401	PK
4		*	10273.500	45.718	29.578	-22.482	68.200	16.140	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5590 MHz with OAW-AP1361D (Beam-Forming Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	45.155	33.586	-28.845	74.000	11.569	PK
2		*	7876.500	45.532	33.429	-22.668	68.200	12.104	PK
3			8318.500	45.311	32.938	-28.689	74.000	12.373	PK
4			10273.500	45.429	29.289	-22.771	68.200	16.140	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670 MHz with OAW-AP1361D (Beam-Forming Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	43.547	31.903	-30.453	74.000	11.644	PK
2			7910.500	43.949	31.810	-24.251	68.200	12.138	PK
3			8310.000	43.880	31.511	-30.120	74.000	12.369	PK
4		*	10265.000	45.738	29.625	-22.462	68.200	16.113	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670 MHz with OAW-AP1361D (Beam-Forming Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.656	33.087	-29.344	74.000	11.569	PK
2			7893.500	44.989	32.868	-23.211	68.200	12.121	PK
3			8327.000	43.896	31.519	-30.104	74.000	12.377	PK
4		*	10265.000	45.939	29.826	-22.261	68.200	16.113	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5710 MHz with OAW-AP1361D (Beam-Forming Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	43.191	31.477	-30.809	74.000	11.714	PK
2			7876.500	43.901	31.798	-24.299	68.200	12.104	PK
3			8386.500	43.830	31.426	-30.170	74.000	12.404	PK
4		*	10273.500	45.467	29.327	-22.733	68.200	16.140	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5710 MHz with OAW-AP1361D (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	43.310	31.558	-30.690	74.000	11.752	PK
2			7978.500	43.840	31.632	-24.360	68.200	12.207	PK
3			8369.500	43.546	31.149	-30.454	74.000	12.397	PK
4		*	10078.000	45.485	29.973	-22.715	68.200	15.512	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz with OAW-AP1361D (Beam-Forming Mode)	

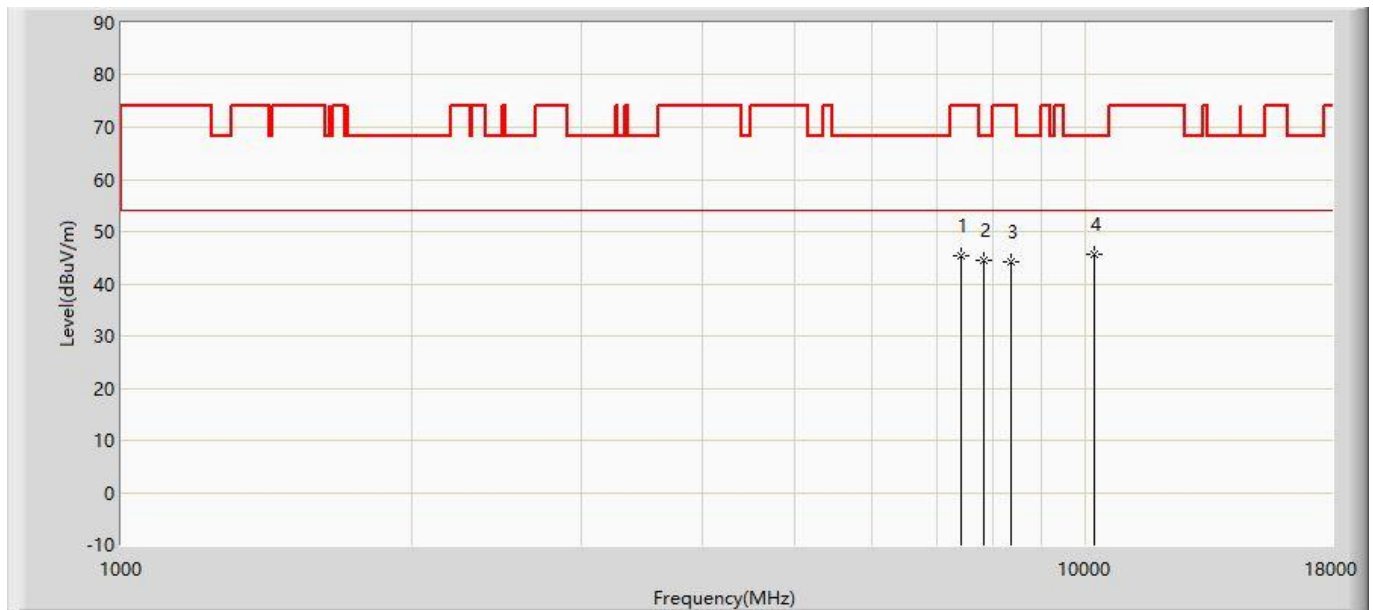

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	45.390	33.821	-28.610	74.000	11.569	PK
2			7842.500	44.593	32.525	-23.607	68.200	12.067	PK
3			8361.000	44.142	31.750	-29.858	74.000	12.392	PK
4		*	10197.000	45.680	29.786	-22.520	68.200	15.894	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz with OAW-AP1361D (Beam-Forming Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7587.500	43.319	31.514	-30.681	74.000	11.806	PK
2			7919.000	43.892	31.745	-24.308	68.200	12.147	PK
3			8361.000	43.617	31.225	-30.383	74.000	12.392	PK
4		*	10273.500	45.306	29.166	-22.894	68.200	16.140	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz with OAW-AP1361D (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7562.000	43.571	31.791	-30.429	74.000	11.780	PK
2			7876.500	44.383	32.280	-23.817	68.200	12.104	PK
3			8327.000	44.120	31.743	-29.880	74.000	12.377	PK
4		*	10265.000	45.308	29.195	-22.892	68.200	16.113	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz with OAW-AP1361D (Beam-Forming Mode)	

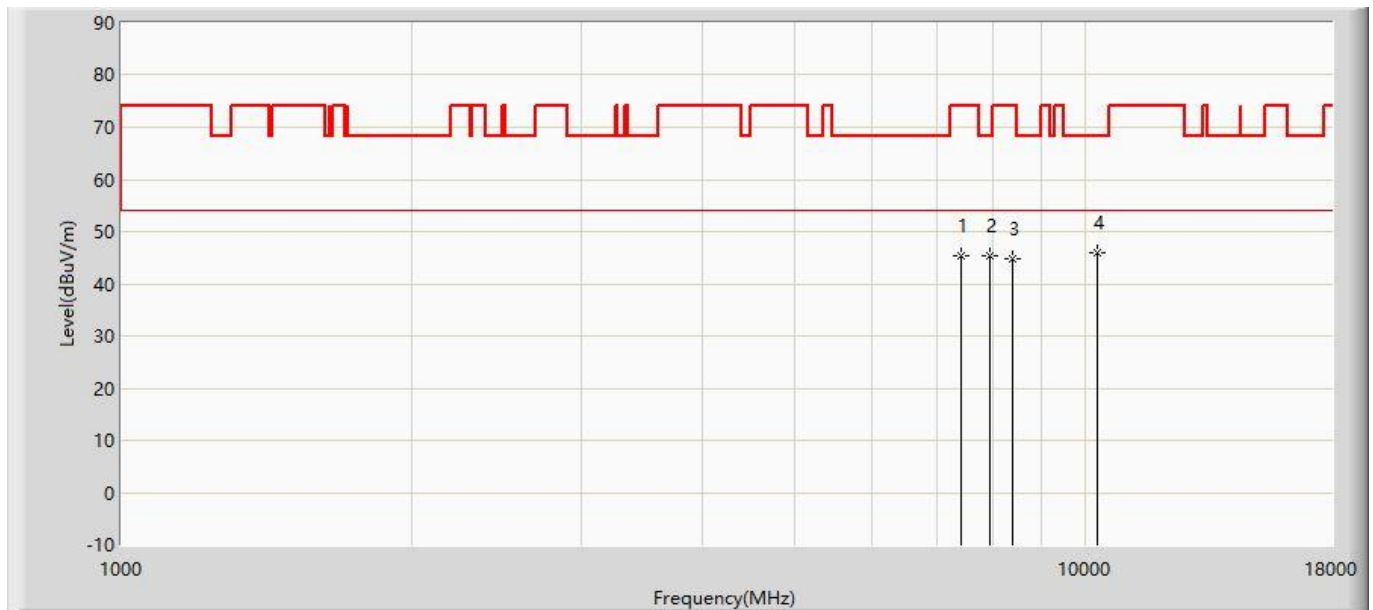


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	45.480	33.911	-28.520	74.000	11.569	PK
2			7944.500	45.503	33.330	-22.697	68.200	12.172	PK
3			8386.500	44.845	32.441	-29.155	74.000	12.404	PK
4		*	10282.000	45.911	29.743	-22.289	68.200	16.168	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210 MHz with OAW-AP1361D (Beam-Forming Mode)	

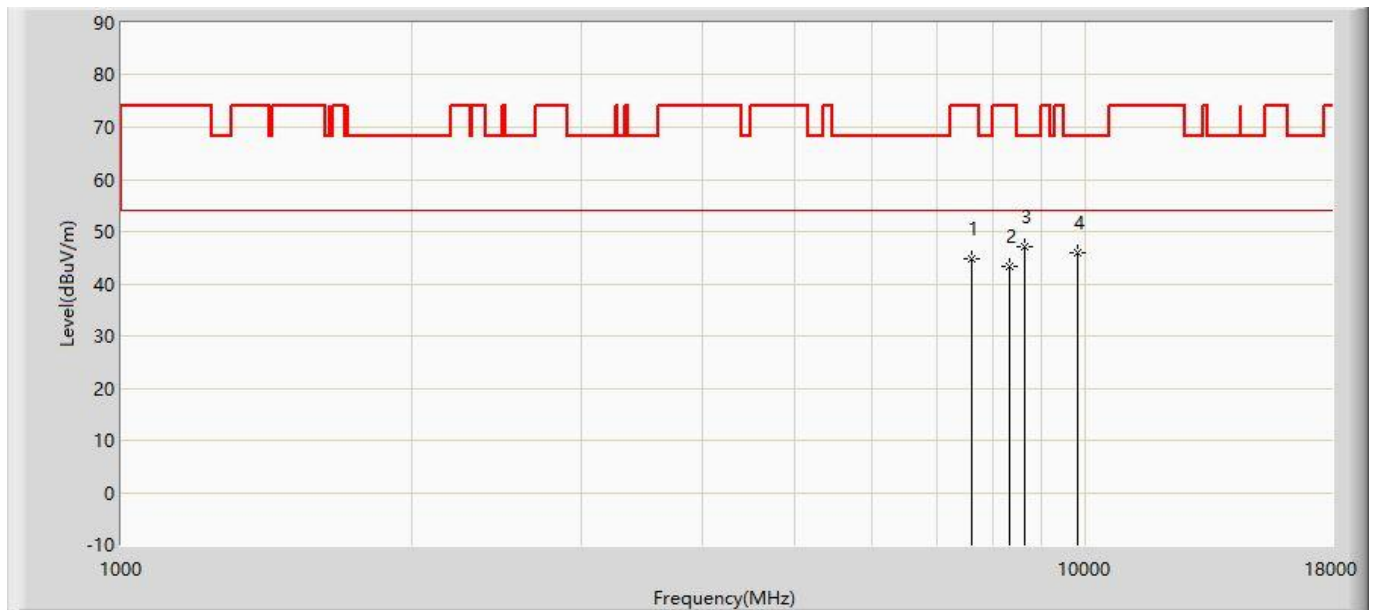


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	44.896	33.073	-29.104	74.000	11.822	PK
2			8335.500	43.360	30.979	-30.640	74.000	12.381	PK
3		*	8650.000	47.087	34.235	-21.113	68.200	12.852	PK
4			9797.500	45.993	31.397	-22.207	68.200	14.597	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210 MHz with OAW-AP1361D (Beam-Forming Mode)	

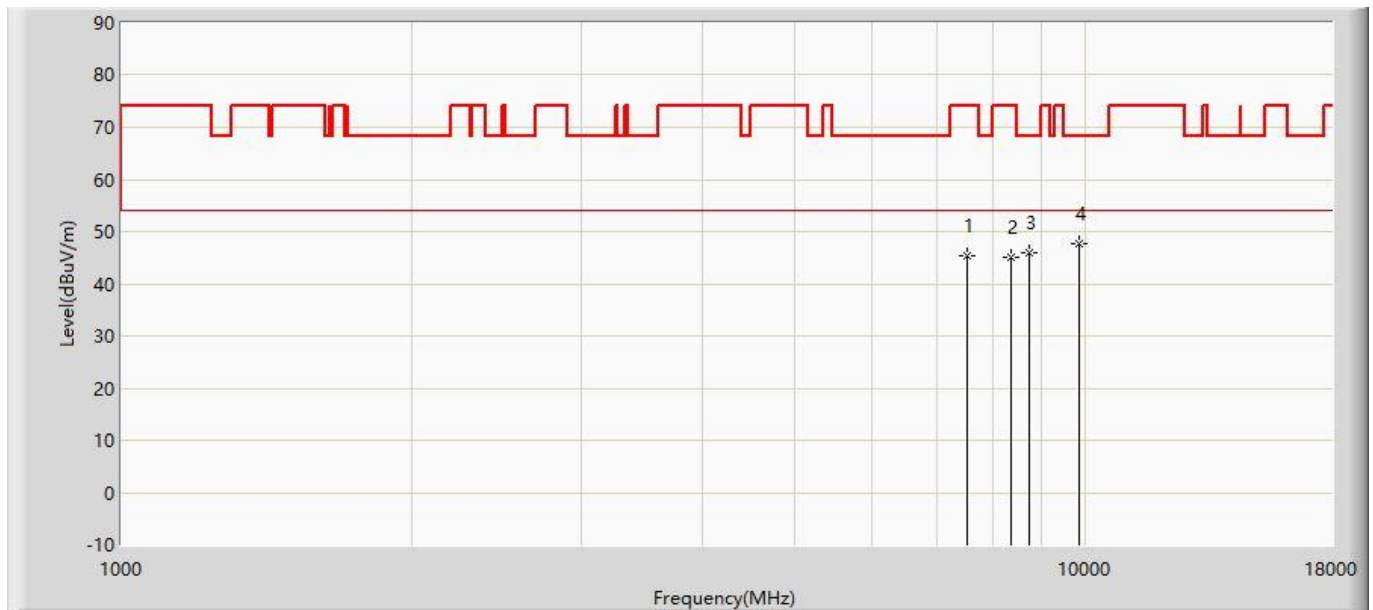


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7545.000	45.506	33.745	-28.494	74.000	11.761	PK
2			8378.000	44.936	32.535	-29.064	74.000	12.401	PK
3			8726.500	45.990	32.935	-22.210	68.200	13.055	PK
4		*	9857.000	47.783	32.993	-20.417	68.200	14.790	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290 MHz with OAW-AP1361D (Beam-Forming Mode)	

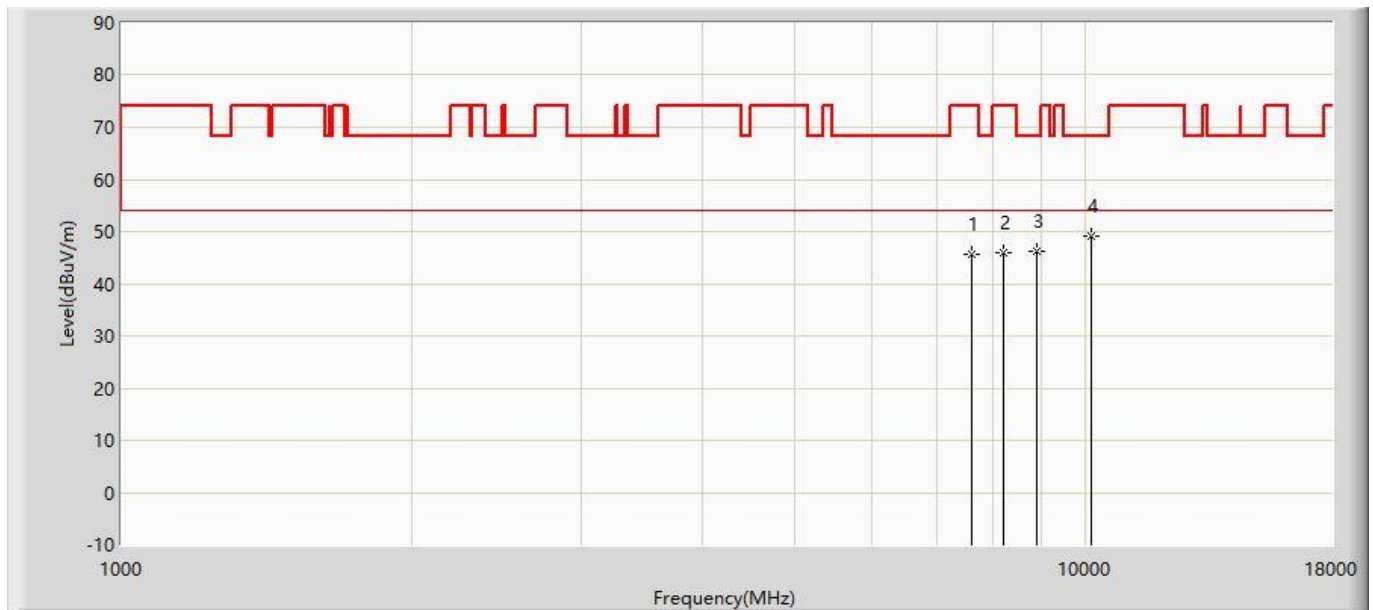


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7630.000	45.759	33.910	-28.241	74.000	11.849	PK
2			8216.500	45.946	33.618	-28.054	74.000	12.328	PK
3			8888.000	46.191	32.709	-22.009	68.200	13.482	PK
4		*	10120.500	48.994	33.346	-19.206	68.200	15.648	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290 MHz with OAW-AP1361D (Beam-Forming Mode)	

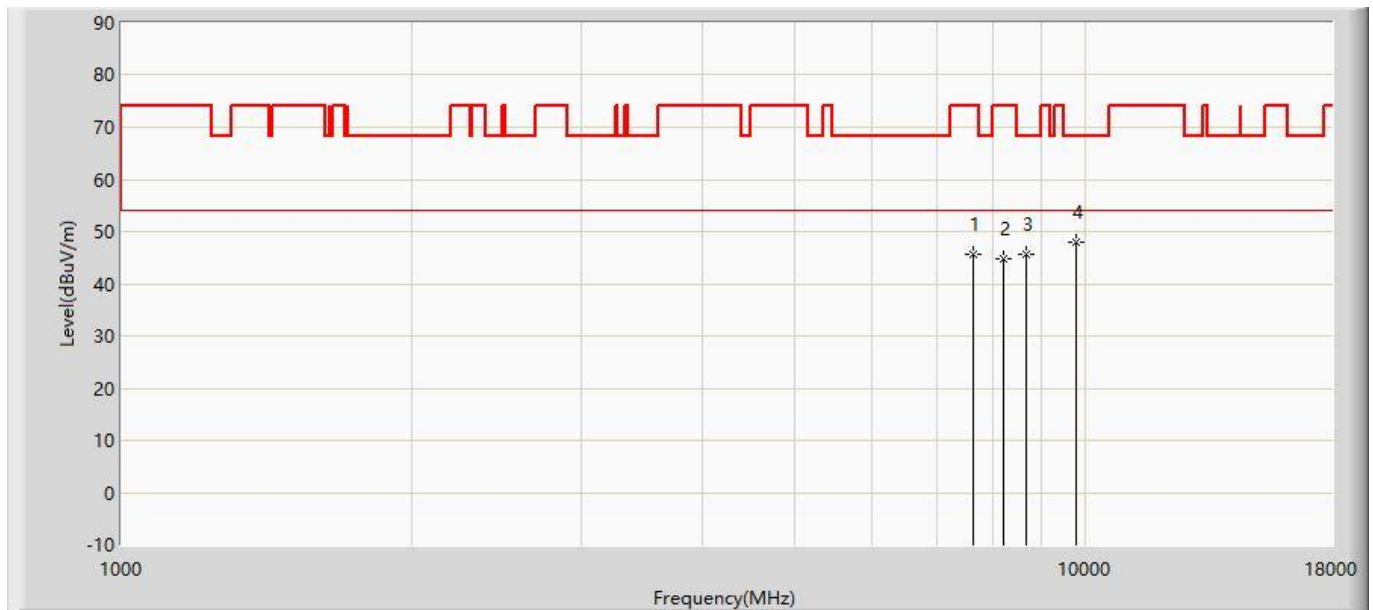

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7638.500	45.680	33.822	-28.320	74.000	11.859	PK
2			8216.500	44.888	32.560	-29.112	74.000	12.328	PK
3			8667.000	45.595	32.697	-22.605	68.200	12.898	PK
4		*	9763.500	48.032	33.548	-20.168	68.200	14.485	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530 MHz with OAW-AP1361D (Beam-Forming Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	44.053	32.390	-29.947	74.000	11.663	PK
2			7936.000	45.316	33.152	-22.884	68.200	12.164	PK
3			8386.500	43.366	30.962	-30.634	74.000	12.404	PK
4		*	10282.000	45.521	29.353	-22.679	68.200	16.168	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530 MHz with OAW-AP1361D (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7383.500	44.214	32.760	-29.786	74.000	11.455	PK
2			7902.000	44.538	32.408	-23.662	68.200	12.130	PK
3			8310.000	44.700	32.331	-29.300	74.000	12.369	PK
4		*	10078.000	45.356	29.844	-22.844	68.200	15.512	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610 MHz with OAW-AP1361D (Beam-Forming Mode)	

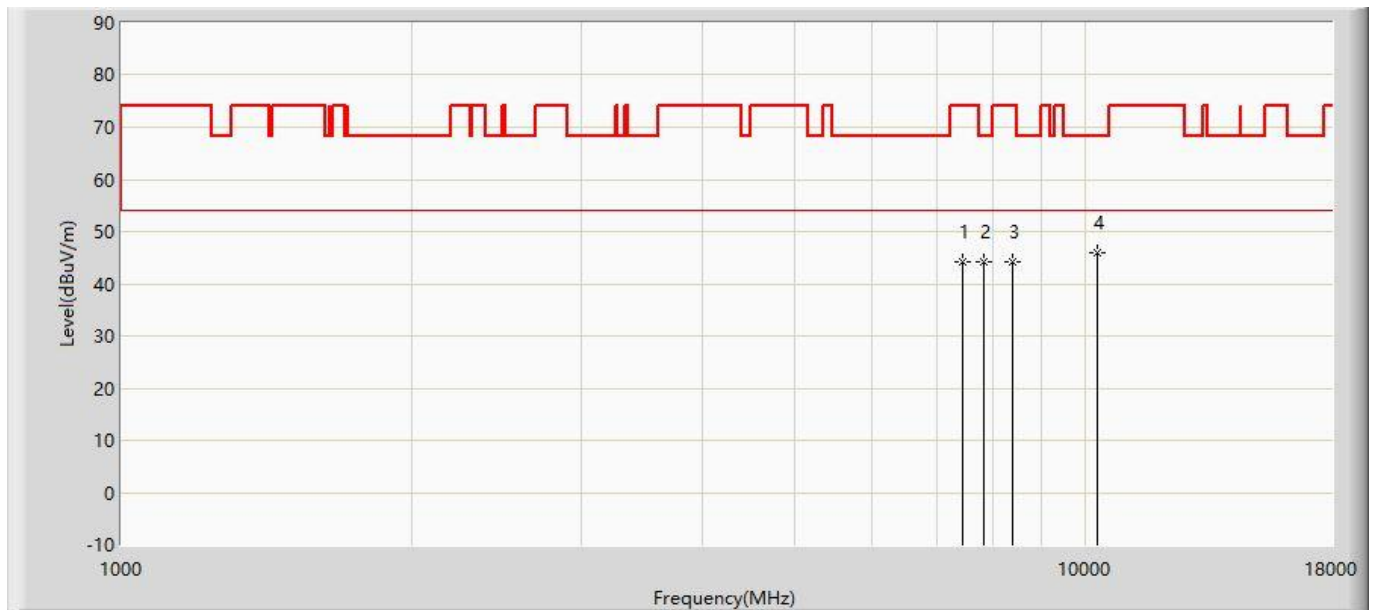


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7451.500	44.177	32.570	-29.823	74.000	11.607	PK
2			7851.000	44.330	32.254	-23.870	68.200	12.076	PK
3			8386.500	44.305	31.901	-29.695	74.000	12.404	PK
4		*	10282.000	45.851	29.683	-22.349	68.200	16.168	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610 MHz with OAW-AP1361D (Beam-Forming Mode)	

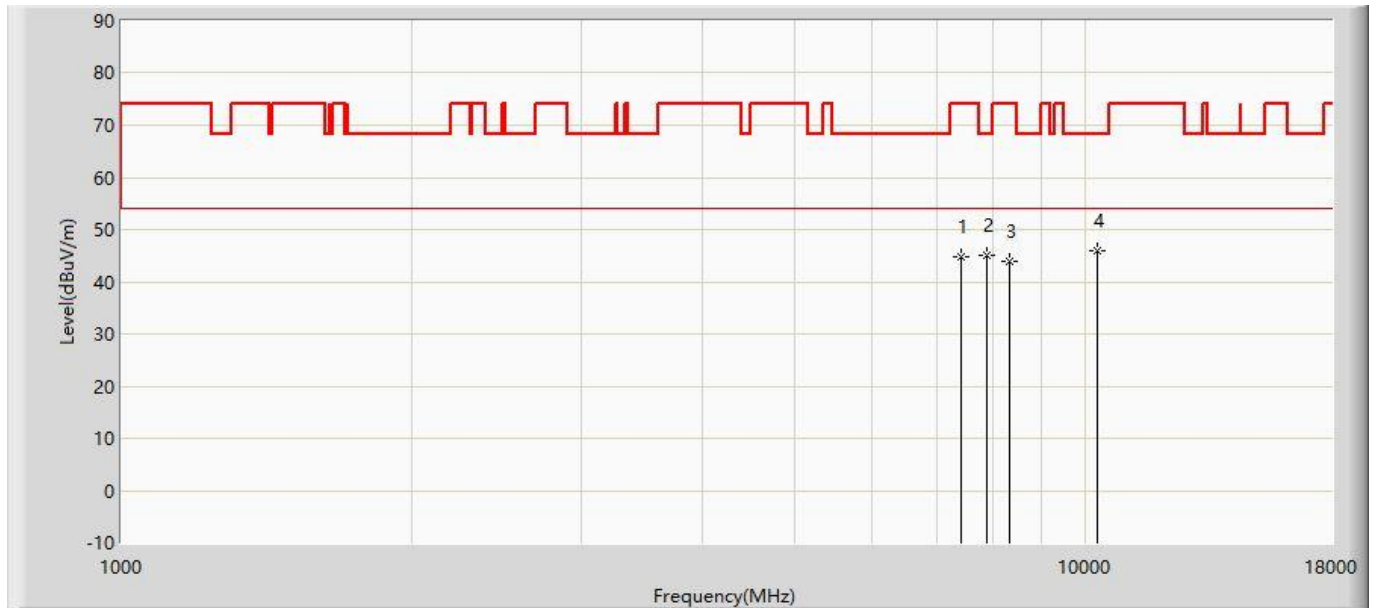

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.656	33.087	-29.344	74.000	11.569	PK
2			7893.500	44.989	32.868	-23.211	68.200	12.121	PK
3			8327.000	43.896	31.519	-30.104	74.000	12.377	PK
4		*	10265.000	45.939	29.826	-22.261	68.200	16.113	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5670 MHz with OAW-AP1361D (Beam-Forming Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	43.191	31.477	-30.809	74.000	11.714	PK
2			7876.500	43.901	31.798	-24.299	68.200	12.104	PK
3			8386.500	43.830	31.426	-30.170	74.000	12.404	PK
4		*	10273.500	45.467	29.327	-22.733	68.200	16.140	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5670 MHz with OAW-AP1361D (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	43.310	31.558	-30.690	74.000	11.752	PK
2			7978.500	43.840	31.632	-24.360	68.200	12.207	PK
3			8369.500	43.546	31.149	-30.454	74.000	12.397	PK
4		*	10078.000	45.485	29.973	-22.715	68.200	15.512	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz with OAW-AP1361D (Beam-Forming Mode)	

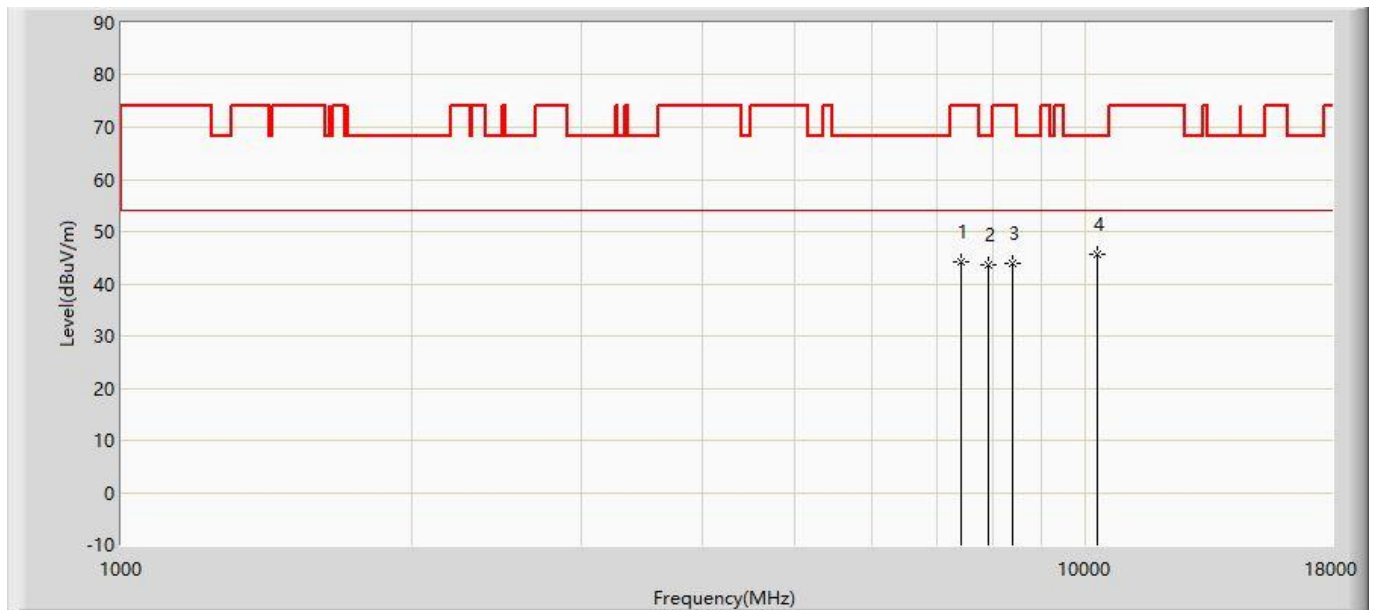


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.085	32.516	-29.915	74.000	11.569	PK
2			7927.500	43.561	31.405	-24.639	68.200	12.155	PK
3			8386.500	43.937	31.533	-30.063	74.000	12.404	PK
4		*	10273.500	45.592	29.452	-22.608	68.200	16.140	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/21 - 15:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz with OAW-AP1361D (Beam-Forming Mode)	

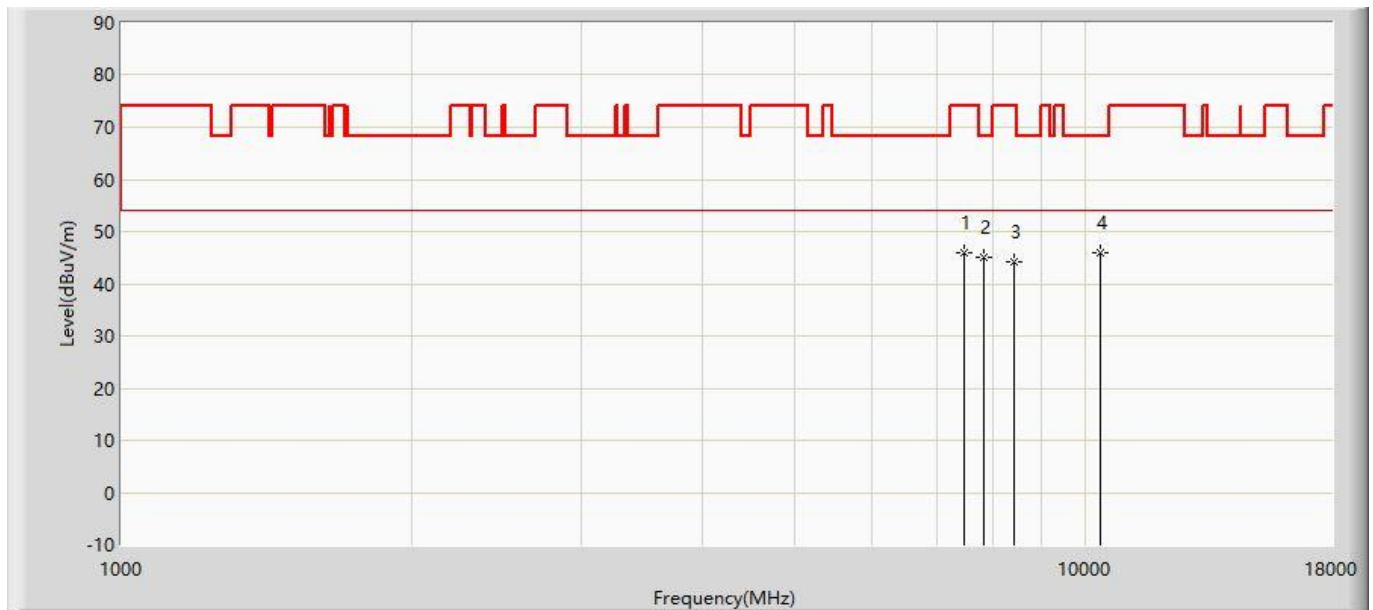


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	46.046	34.383	-27.954	74.000	11.663	PK
2			7842.500	45.055	32.987	-23.145	68.200	12.067	PK
3			8429.000	44.174	31.751	-29.826	74.000	12.423	PK
4		*	10358.500	46.003	29.589	-22.197	68.200	16.414	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290 MHz with OAW-AP1361D (Beam-Forming Mode)	

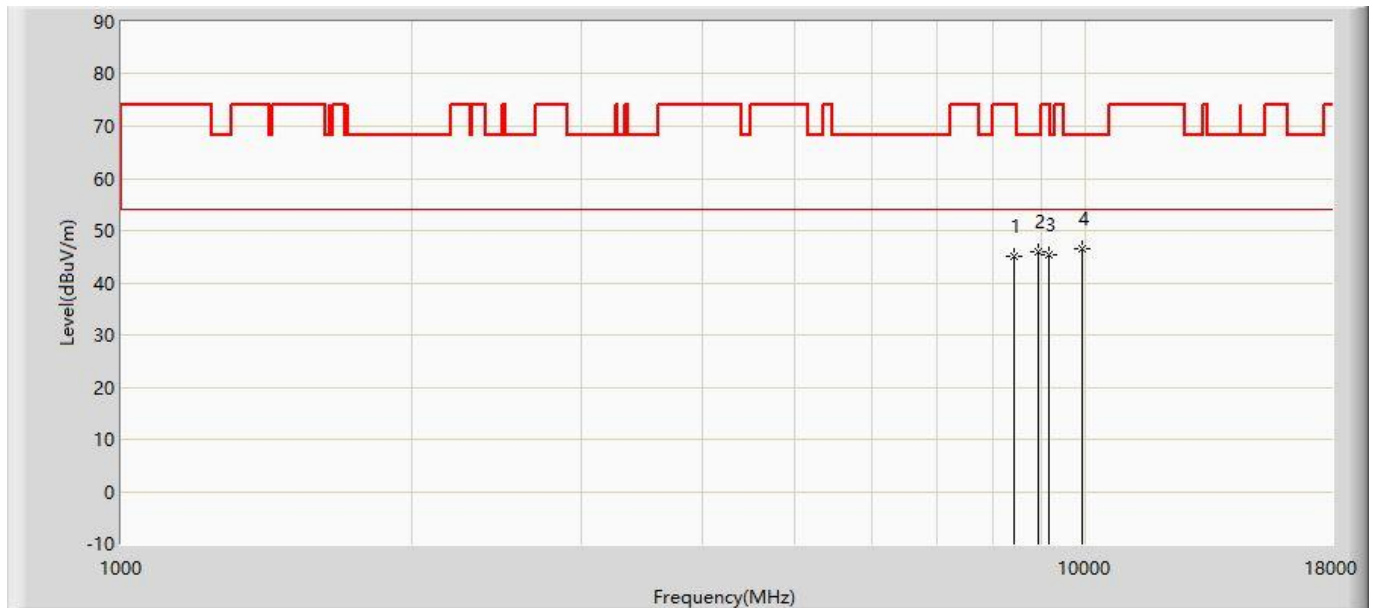


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8420.500	45.160	32.741	-28.840	74.000	12.419	PK
2			8939.000	46.059	32.440	-22.141	68.200	13.619	PK
3			9160.000	45.221	31.492	-28.779	74.000	13.729	PK
4		*	9899.500	46.660	31.729	-21.540	68.200	14.931	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290 MHz with OAW-AP1361D (Beam-Forming Mode)	

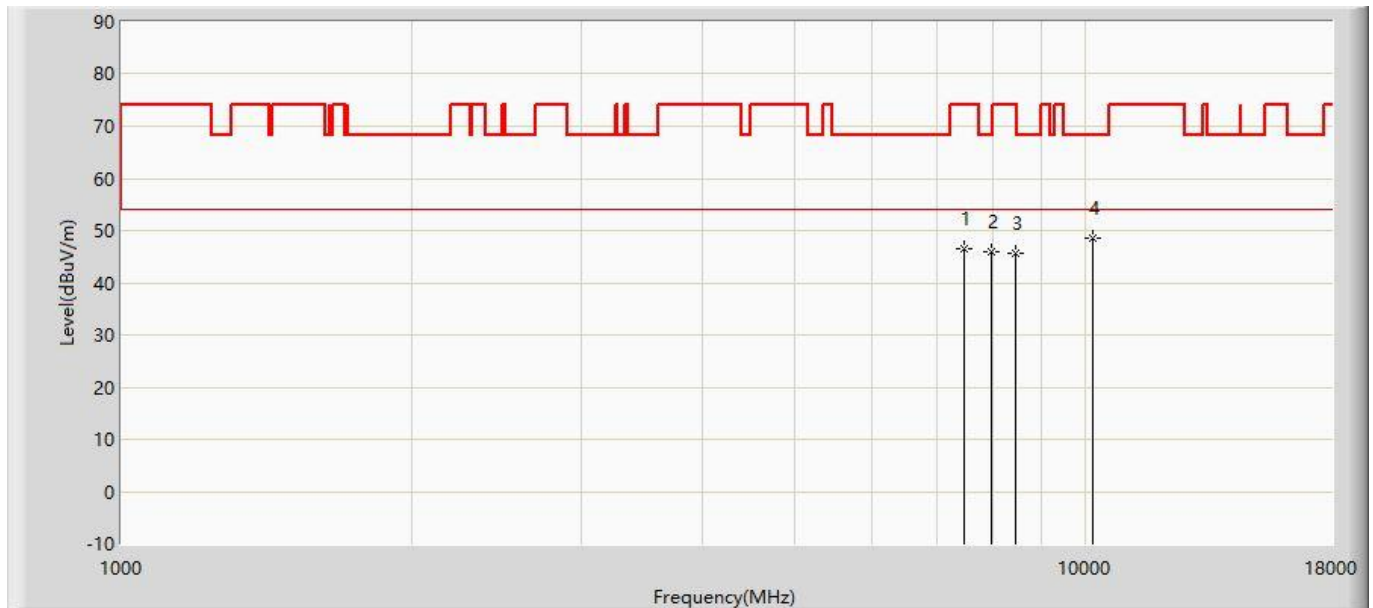


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7494.000	46.614	34.912	-27.386	74.000	11.702	PK
2			7970.000	45.929	33.730	-22.271	68.200	12.199	PK
3			8454.500	45.757	33.322	-28.243	74.000	12.435	PK
4		*	10180.000	48.482	32.642	-19.718	68.200	15.840	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610 MHz with OAW-AP1361D (Beam-Forming Mode)	

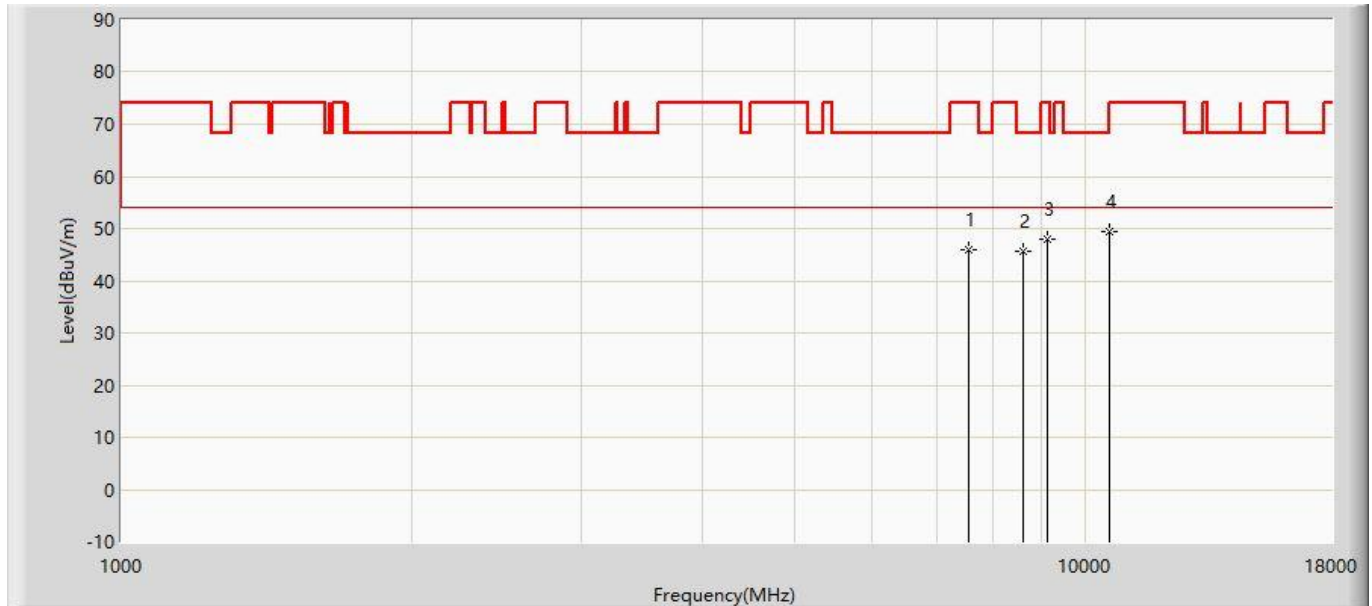


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7562.000	45.802	34.022	-28.198	74.000	11.780	PK
2			8624.500	45.729	32.944	-22.471	68.200	12.785	PK
3			9126.000	48.114	34.375	-25.886	74.000	13.739	PK
4		*	10579.500	49.377	32.394	-18.823	68.200	16.983	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610 MHz with OAW-AP1361D (Beam-Forming Mode)	

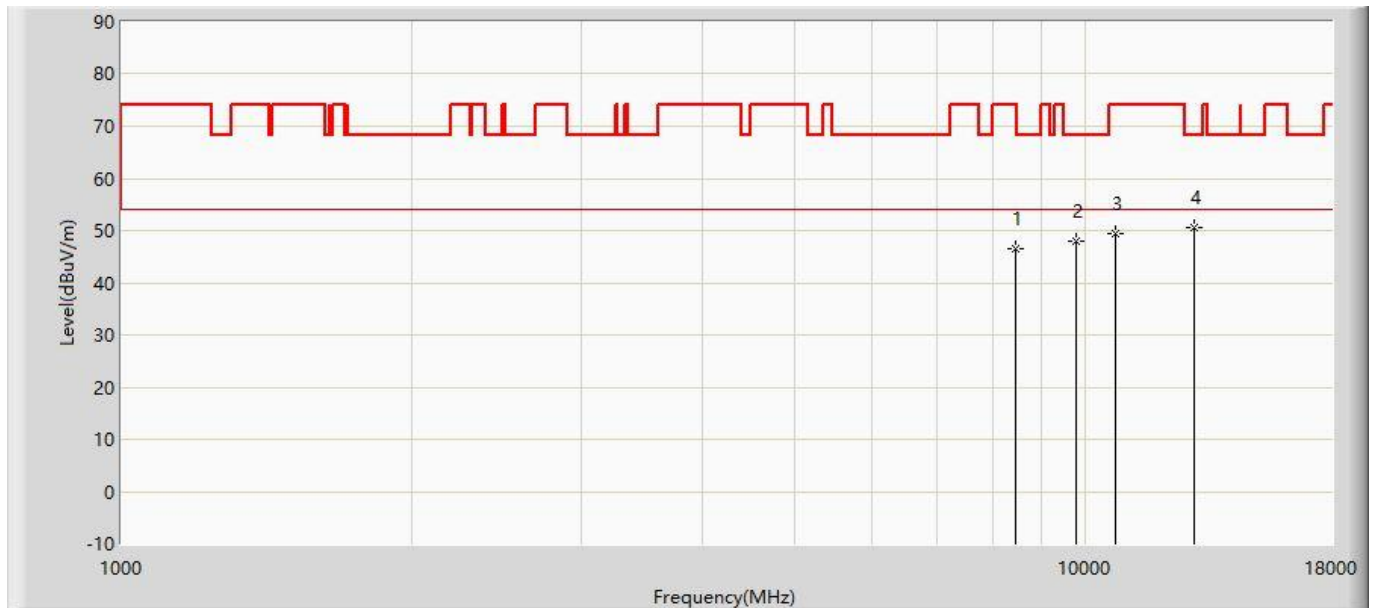


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8471.500	46.555	34.113	-27.445	74.000	12.442	PK
2			9763.500	47.924	33.440	-20.276	68.200	14.485	PK
3			10749.500	49.438	32.213	-24.562	74.000	17.225	PK
4		*	12959.500	50.527	31.541	-17.673	68.200	18.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5180MHz with OAW-AP1361D - Scan Antenna	

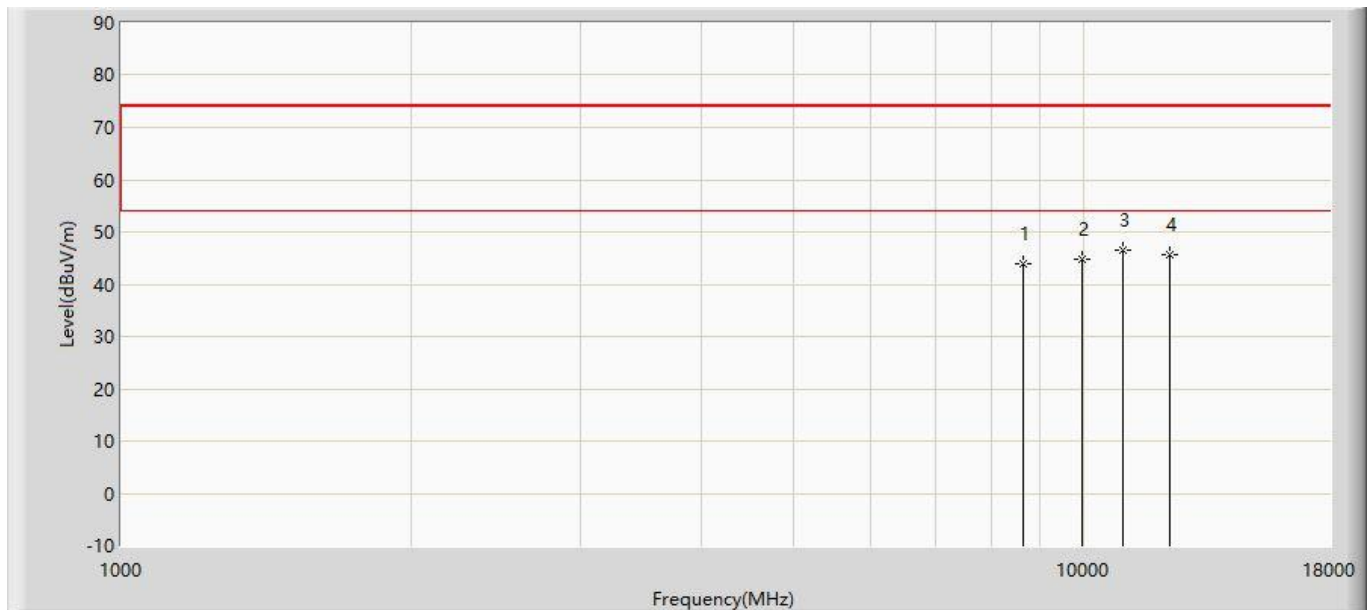


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8658.500	43.945	31.070	-30.055	74.000	12.875	PK
2			9967.500	44.813	29.659	-29.187	74.000	15.154	PK
3		*	10970.500	46.504	28.966	-27.496	74.000	17.538	PK
4			12288.000	45.721	27.910	-28.279	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5180MHz with OAW-AP1361D - Scan Antenna	

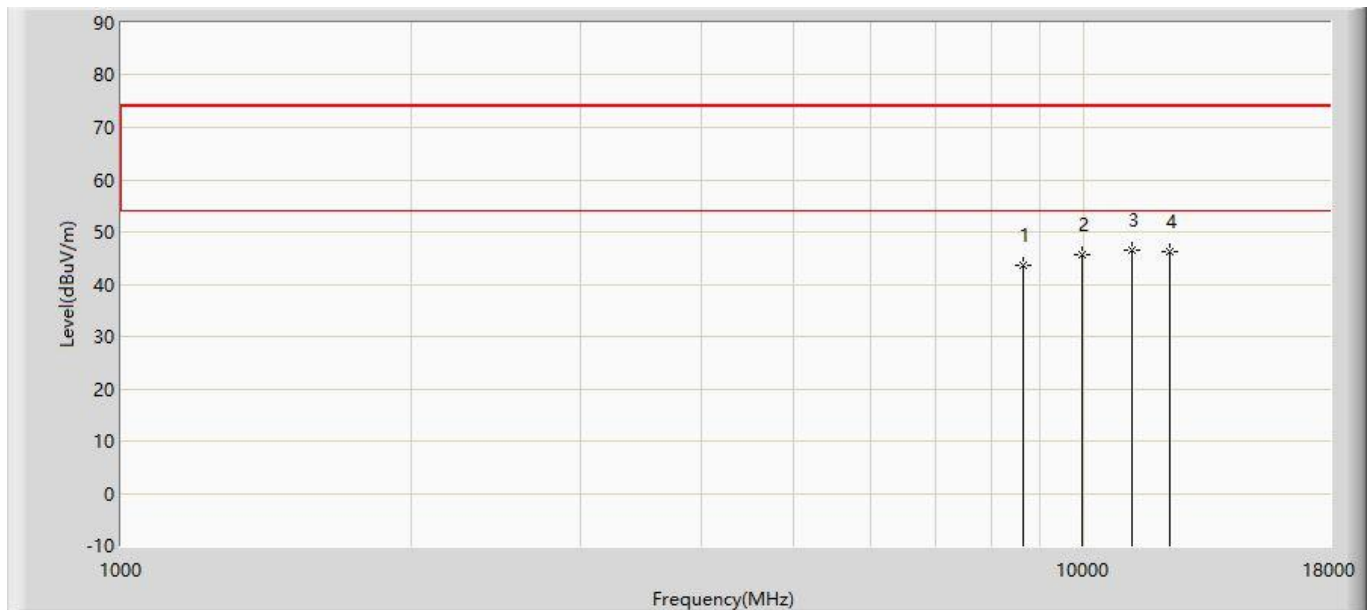


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8658.500	43.561	30.686	-30.439	74.000	12.875	PK
2			9942.000	45.643	30.574	-28.357	74.000	15.069	PK
3		*	11225.500	46.430	28.638	-27.570	74.000	17.792	PK
4			12271.000	46.240	28.429	-27.760	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5220MHz with OAW-AP1361D - Scan Antenna	

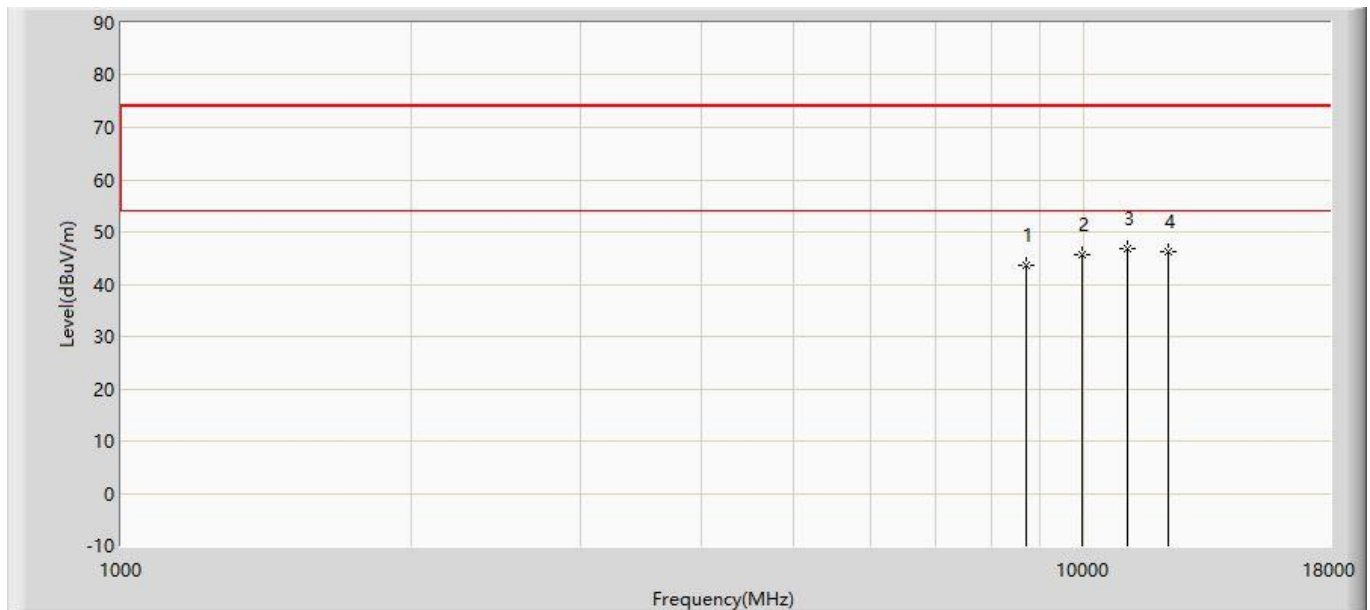


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8692.500	43.683	30.718	-30.317	74.000	12.964	PK
2			9942.000	45.745	30.676	-28.255	74.000	15.069	PK
3		*	11072.500	46.828	29.180	-27.172	74.000	17.648	PK
4			12220.000	46.170	28.356	-27.830	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5220MHz with OAW-AP1361D - Scan Antenna	

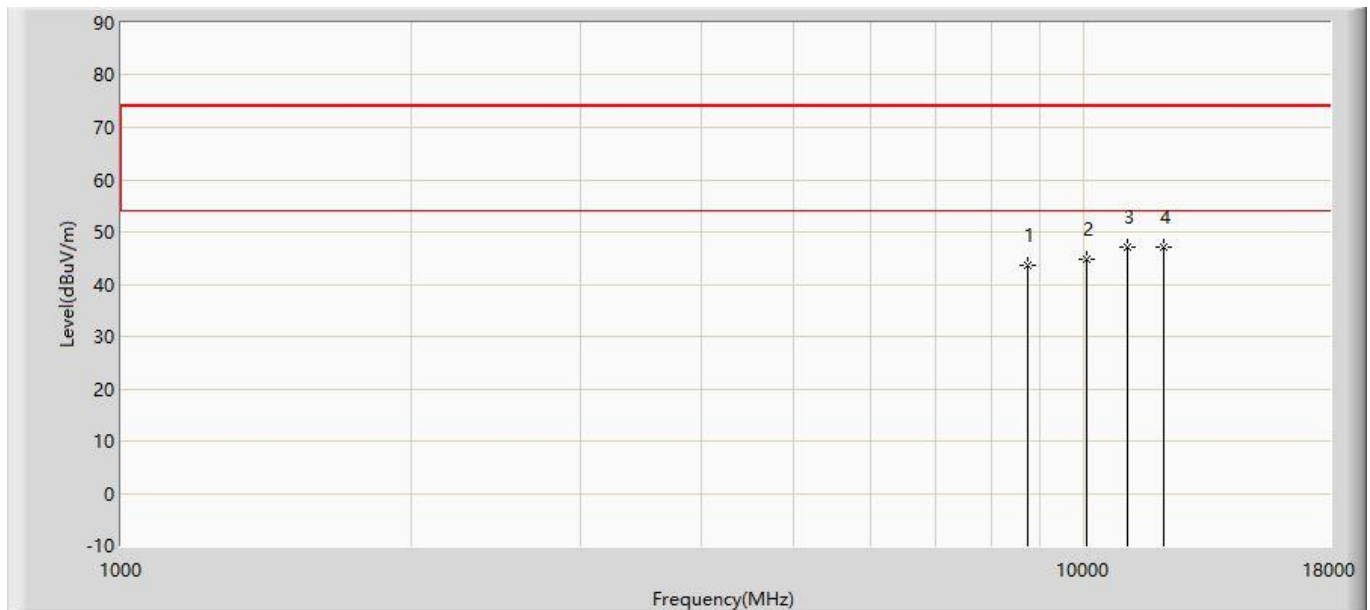


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8735.000	43.514	30.436	-30.486	74.000	13.078	PK
2			10078.000	44.883	29.371	-29.117	74.000	15.512	PK
3			11072.500	46.960	29.312	-27.040	74.000	17.648	PK
4		*	12109.500	47.182	29.366	-26.818	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5240MHz with OAW-AP1361D - Scan Antenna	

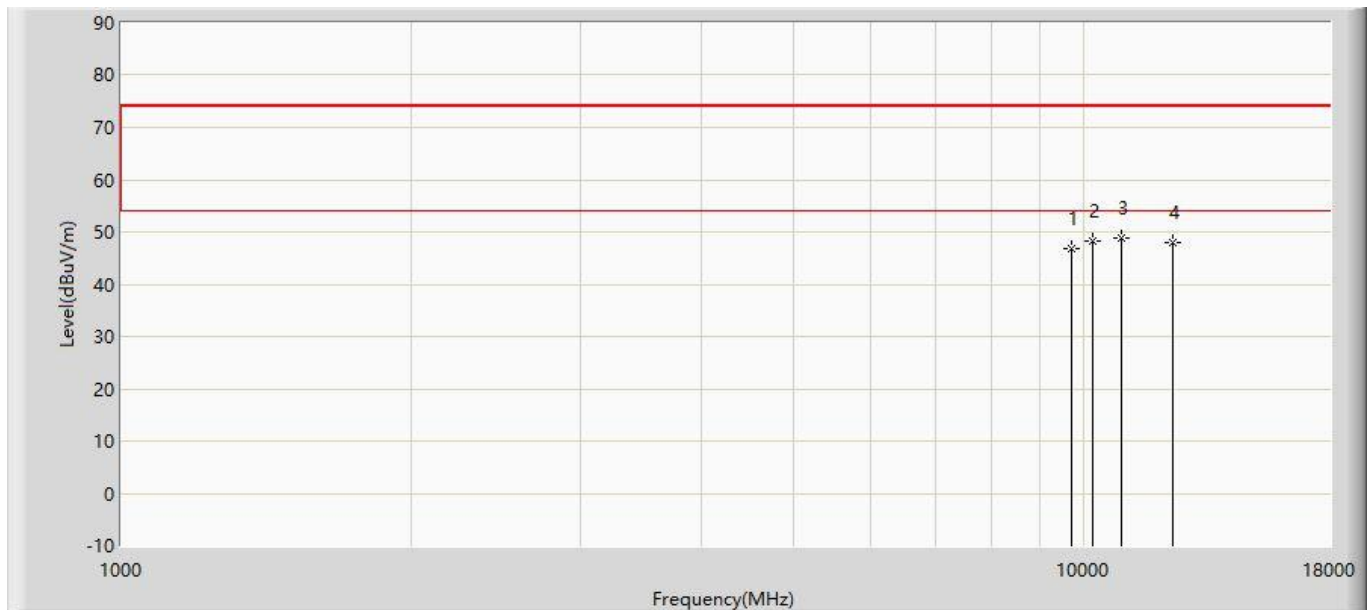


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9687.000	46.746	49.197	-27.254	74.000	-2.451	PK
2			10214.000	48.215	49.540	-25.785	74.000	-1.325	PK
3		*	10936.500	48.962	49.058	-25.038	74.000	-0.097	PK
4			12364.500	48.019	48.703	-25.981	74.000	-0.685	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5240MHz with OAW-AP1361D - Scan Antenna	

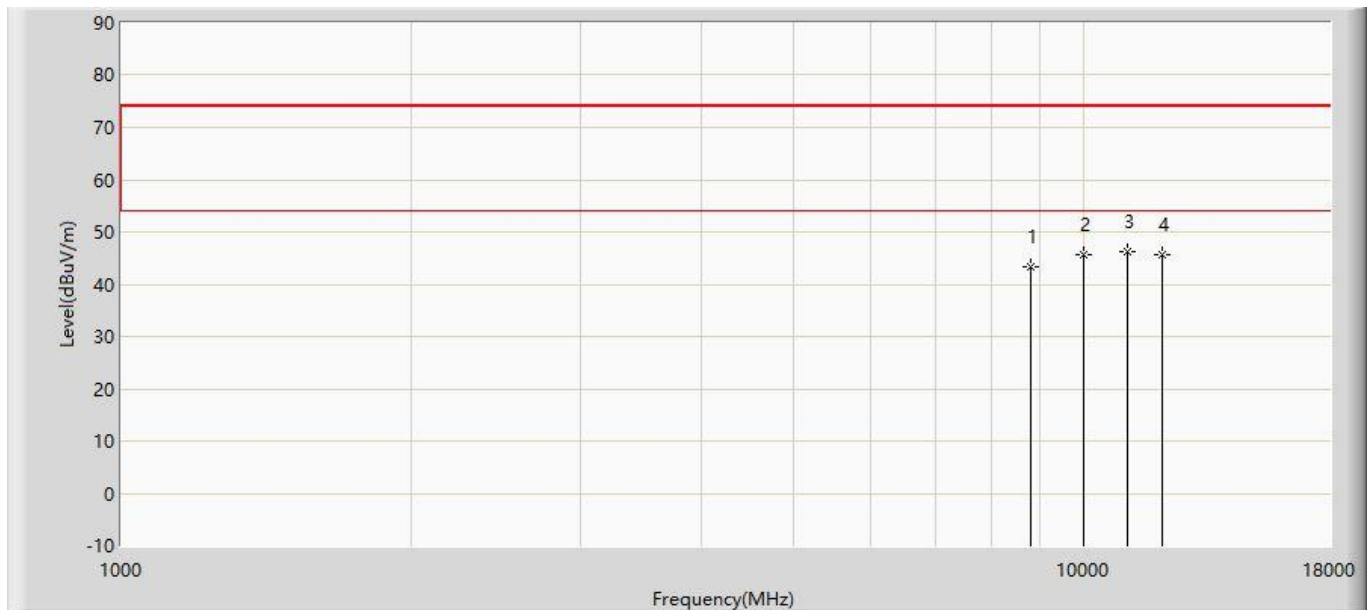


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8811.500	43.288	30.008	-30.712	74.000	13.280	PK
2			9993.000	45.520	30.282	-28.480	74.000	15.238	PK
3		*	11072.500	46.361	28.713	-27.639	74.000	17.648	PK
4			12067.000	45.597	27.779	-28.403	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5745MHz with OAW-AP1361D - Scan Antenna	

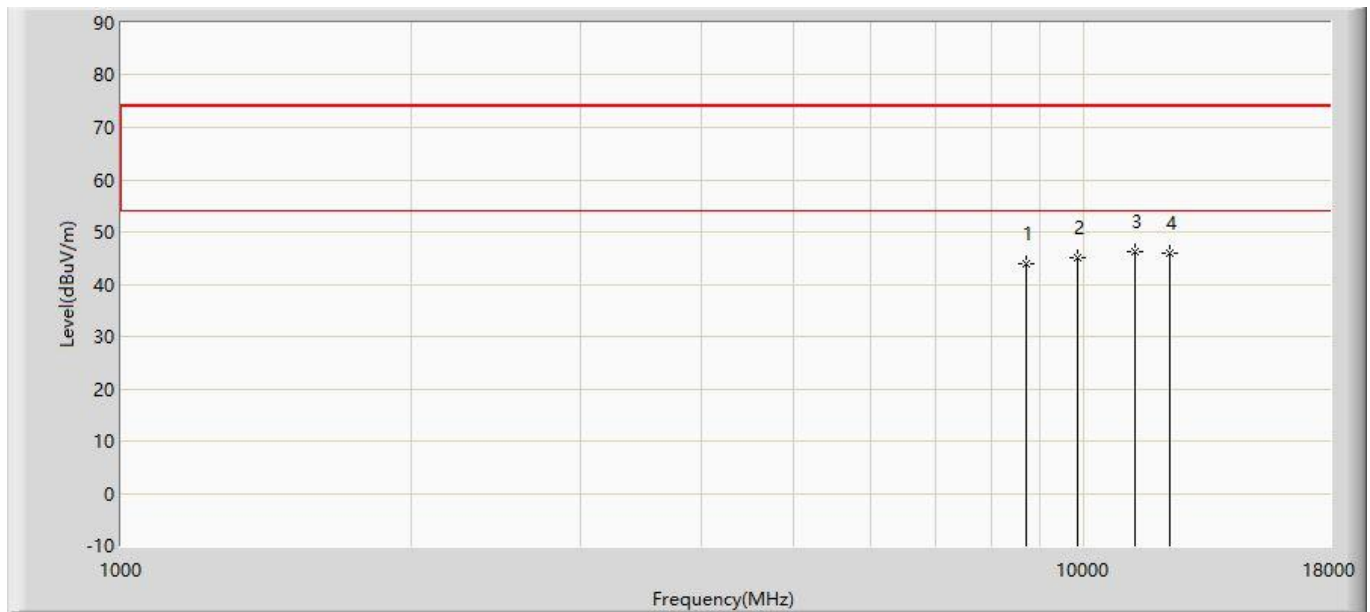


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8692.500	43.820	30.855	-30.180	74.000	12.964	PK
2			9857.000	45.212	30.422	-28.788	74.000	14.790	PK
3		*	11276.500	46.342	28.502	-27.658	74.000	17.840	PK
4			12271.000	45.895	28.084	-28.105	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5745MHz with OAW-AP1361D - Scan Antenna	

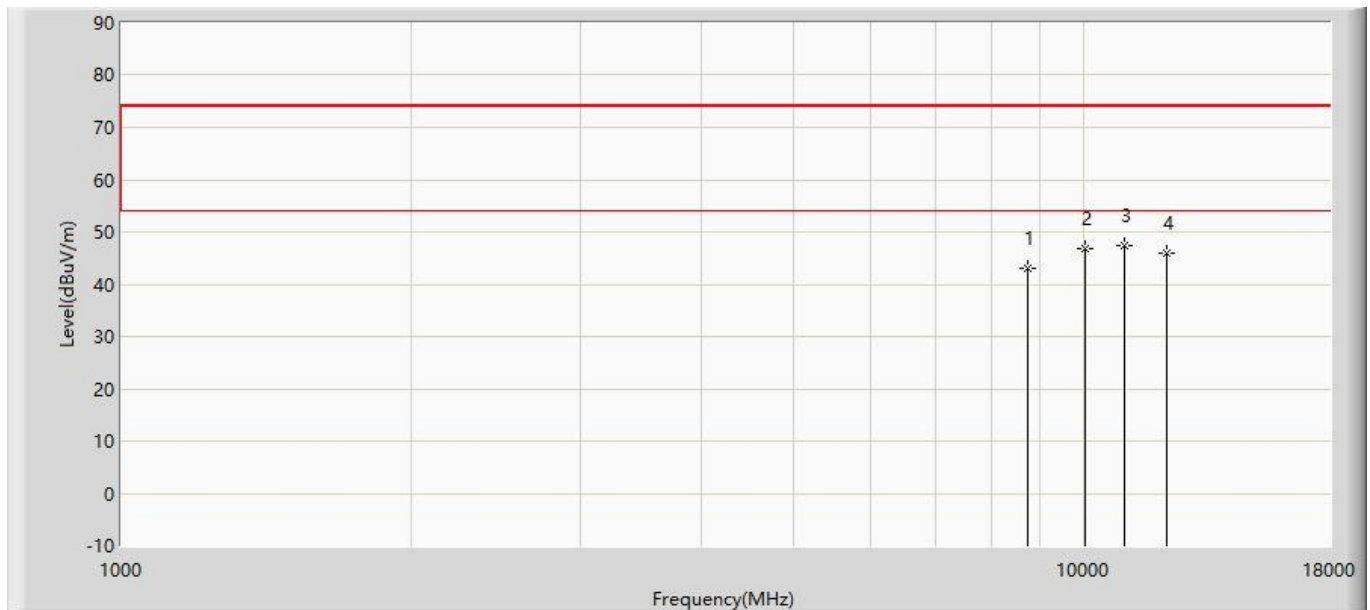


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8735.000	43.084	30.006	-30.916	74.000	13.078	PK
2			10035.500	46.858	31.484	-27.142	74.000	15.374	PK
3		*	11021.500	47.495	29.895	-26.505	74.000	17.600	PK
4			12169.000	46.004	28.188	-27.996	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5785MHz with OAW-AP1361D - Scan Antenna	

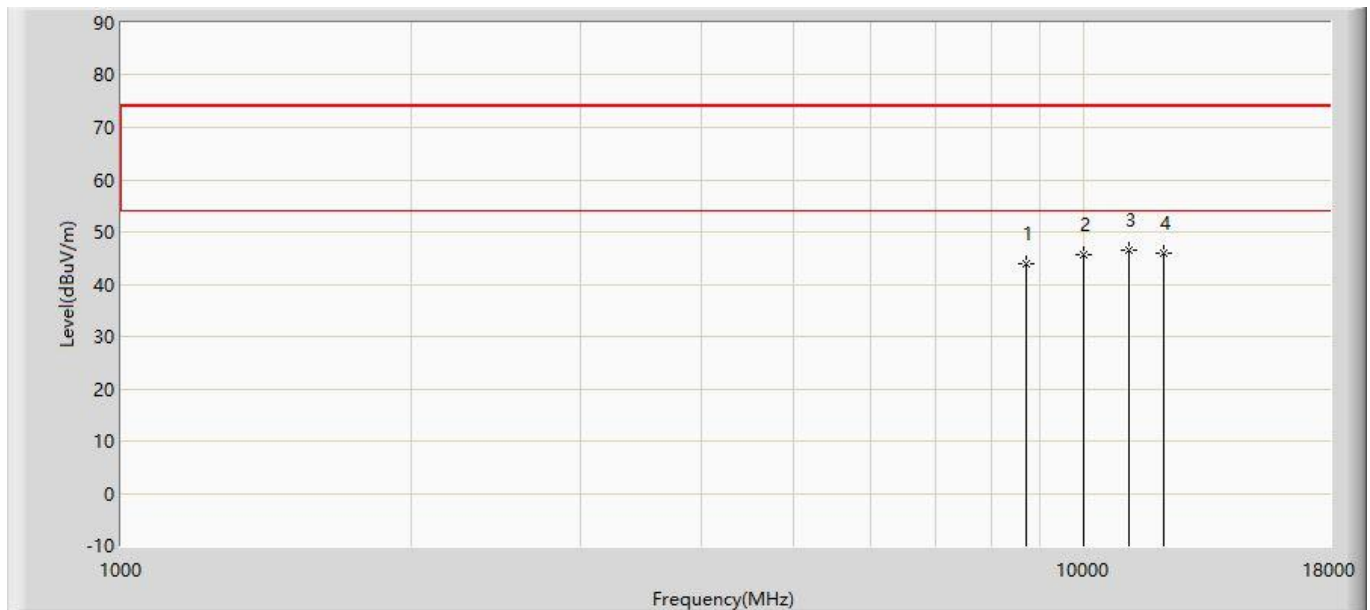


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8692.500	43.808	30.843	-30.192	74.000	12.964	PK
2			9993.000	45.770	30.532	-28.230	74.000	15.238	PK
3		*	11123.500	46.481	28.785	-27.519	74.000	17.696	PK
4			12109.500	45.897	28.081	-28.103	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5785MHz with OAW-AP1361D - Scan Antenna	

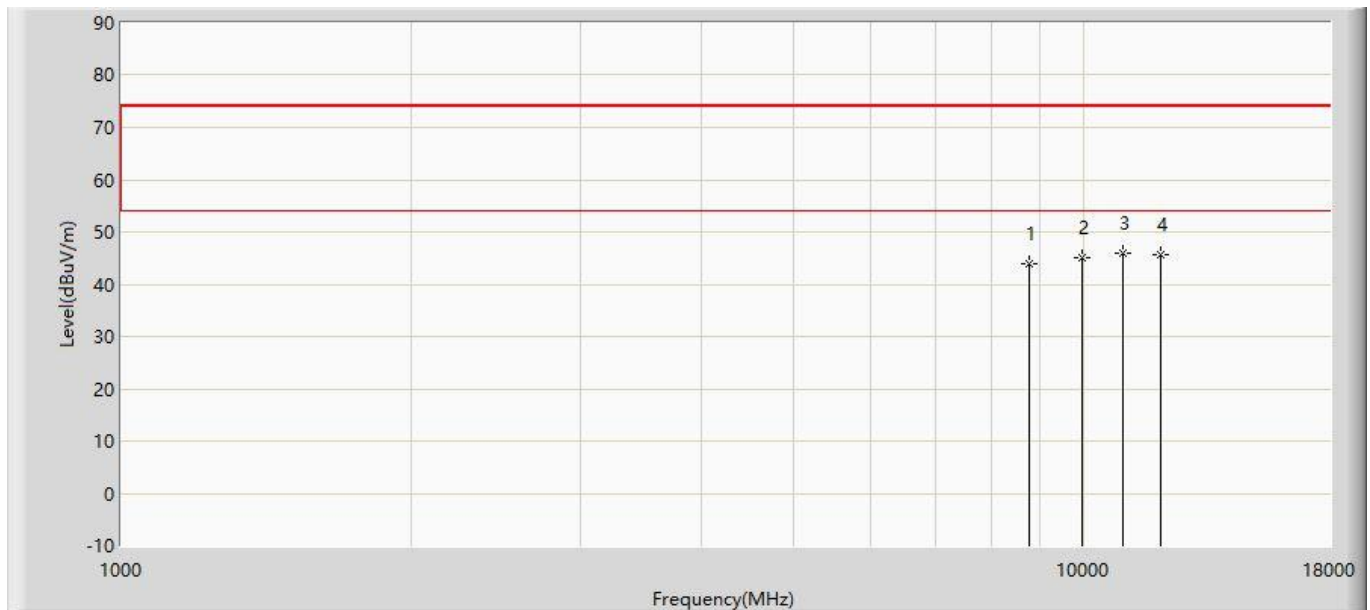


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8769.000	43.821	30.653	-30.179	74.000	13.168	PK
2			9942.000	45.186	30.117	-28.814	74.000	15.069	PK
3		*	10970.500	45.997	28.459	-28.003	74.000	17.538	PK
4			12007.500	45.643	27.824	-28.357	74.000	17.820	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5825MHz with OAW-AP1361D - Scan Antenna	

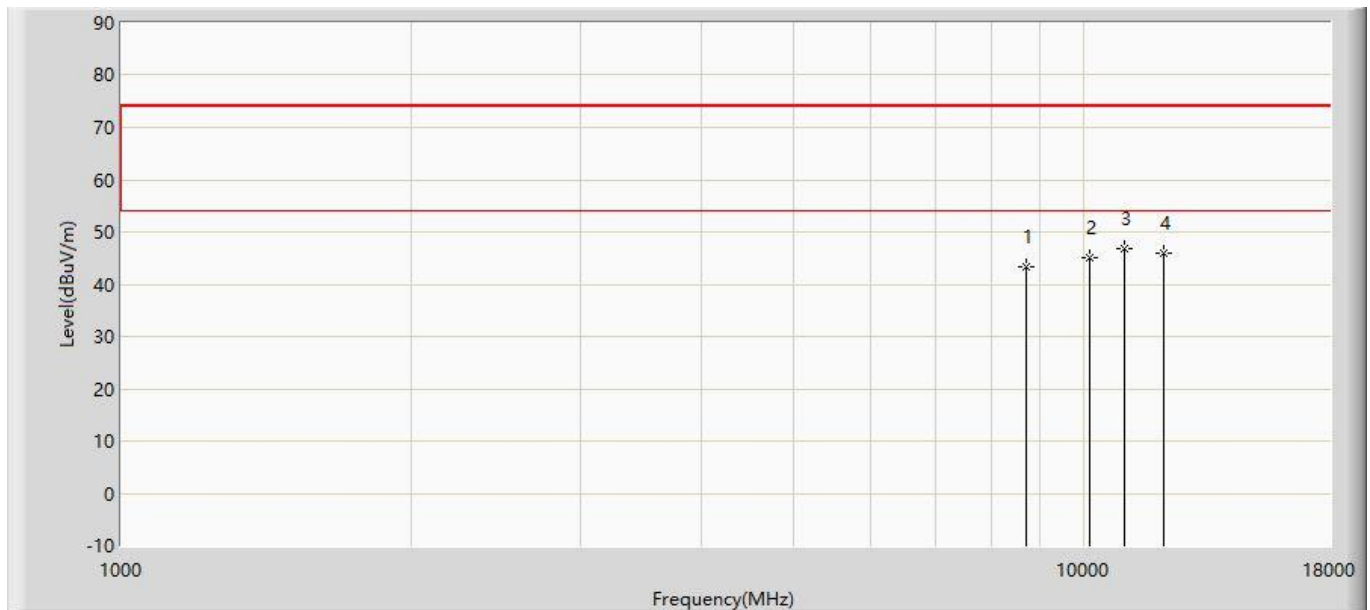


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8692.500	43.205	30.240	-30.795	74.000	12.964	PK
2			10120.500	45.087	29.439	-28.913	74.000	15.648	PK
3		*	11021.500	46.895	29.295	-27.105	74.000	17.600	PK
4			12109.500	45.898	28.082	-28.102	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC2	Time: 2020/04/23 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channnel 5825MHz with OAW-AP1361D - Scan Antenna	

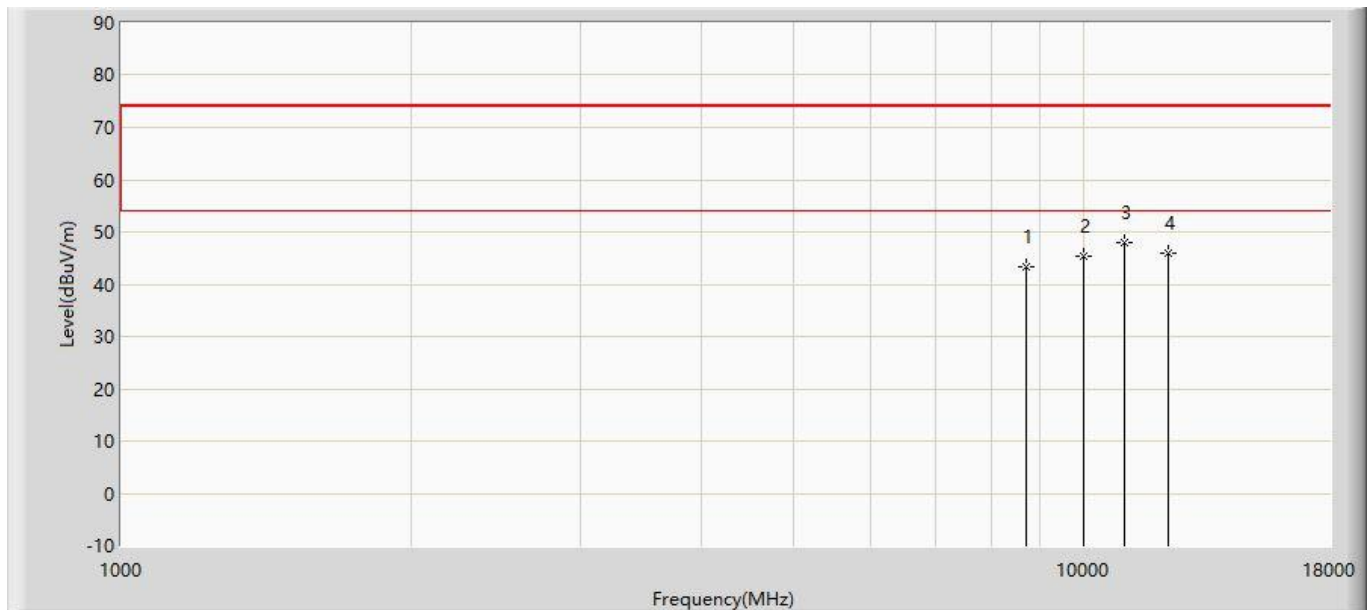


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			8692.500	43.275	30.310	-30.725	74.000	12.964	PK
2			9993.000	45.373	30.135	-28.627	74.000	15.238	PK
3		*	11021.500	47.966	30.366	-26.034	74.000	17.600	PK
4			12220.000	45.975	28.161	-28.025	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Mode No.: OAW-AP1362

Site: AC1	Time: 2020/04/24 - 14:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5180MHz with OAW-AP1362 (CDD Mode)	

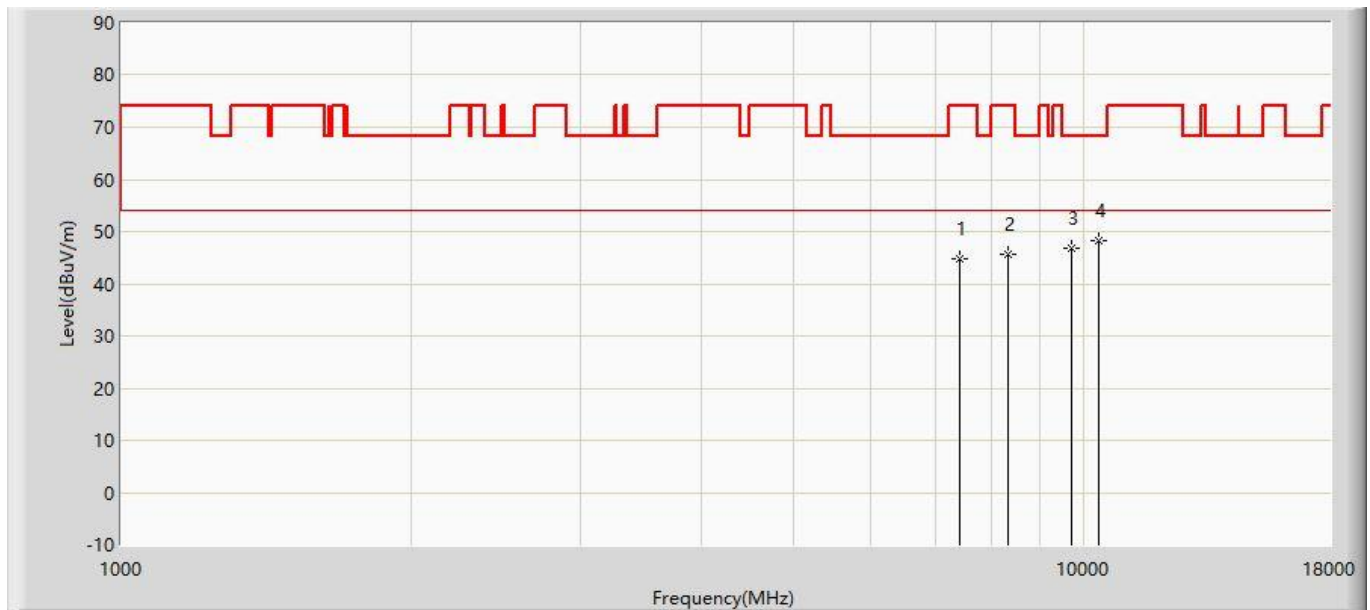


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7417.500	44.915	33.384	-29.085	74.000	11.530	PK
2			8344.000	45.699	33.315	-28.301	74.000	12.384	PK
3			9704.000	46.781	32.492	-21.419	68.200	14.289	PK
4		*	10341.500	48.143	31.783	-20.057	68.200	16.360	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5180MHz with OAW-AP1362 (CDD Mode)	

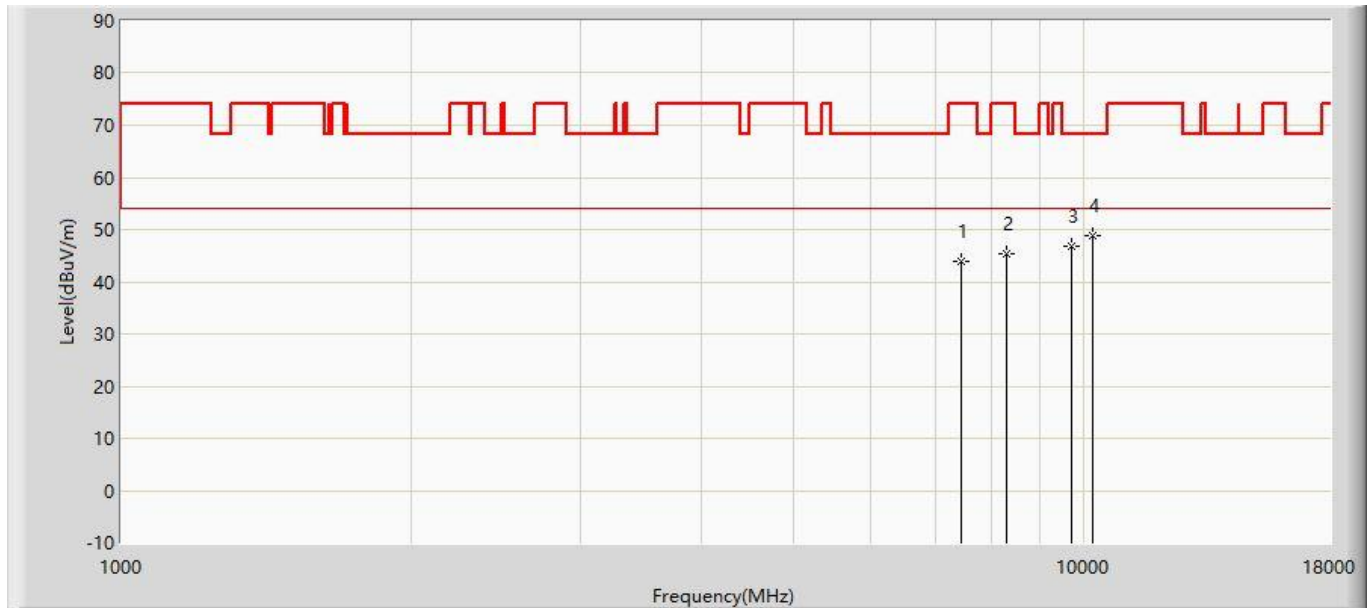


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7451.500	43.897	32.290	-30.103	74.000	11.607	PK
2			8318.500	45.235	32.862	-28.765	74.000	12.373	PK
3			9687.000	46.729	32.497	-21.471	68.200	14.232	PK
4		*	10214.000	48.884	32.935	-19.316	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5220MHz with OAW-AP1362 (CDD Mode)	

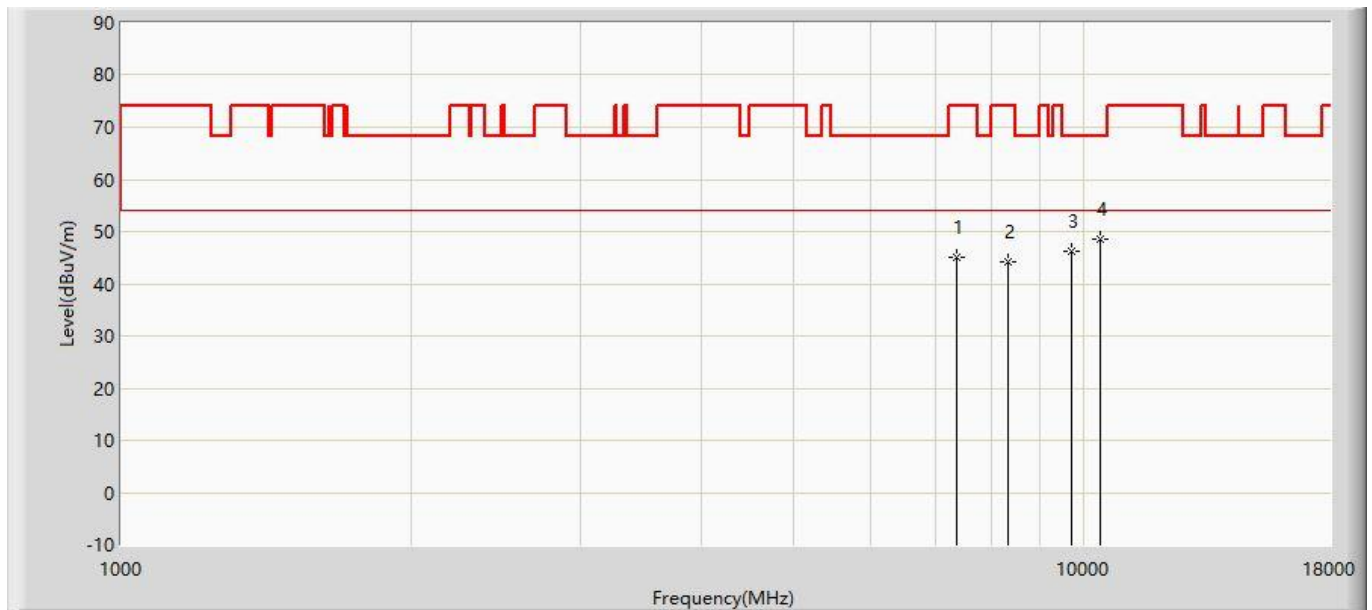


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7375.000	45.080	33.644	-28.920	74.000	11.436	PK
2			8327.000	44.264	31.887	-29.736	74.000	12.377	PK
3			9695.500	46.226	31.965	-21.974	68.200	14.261	PK
4		*	10384.000	48.458	31.962	-19.742	68.200	16.496	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5220MHz with OAW-AP1362 (CDD Mode)	

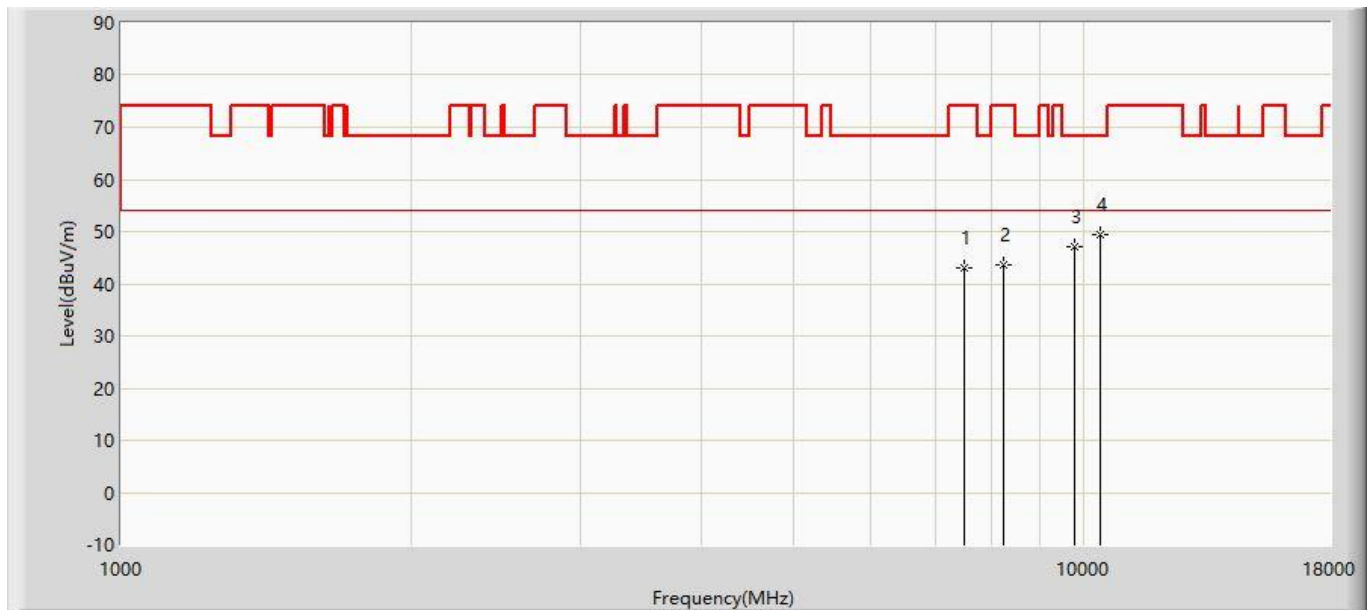


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	43.072	31.358	-30.928	74.000	11.714	PK
2			8242.000	43.607	31.268	-30.393	74.000	12.339	PK
3			9772.000	47.243	32.731	-20.957	68.200	14.512	PK
4		*	10392.500	49.371	32.848	-18.829	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5240MHz with OAW-AP1362 (CDD Mode)	

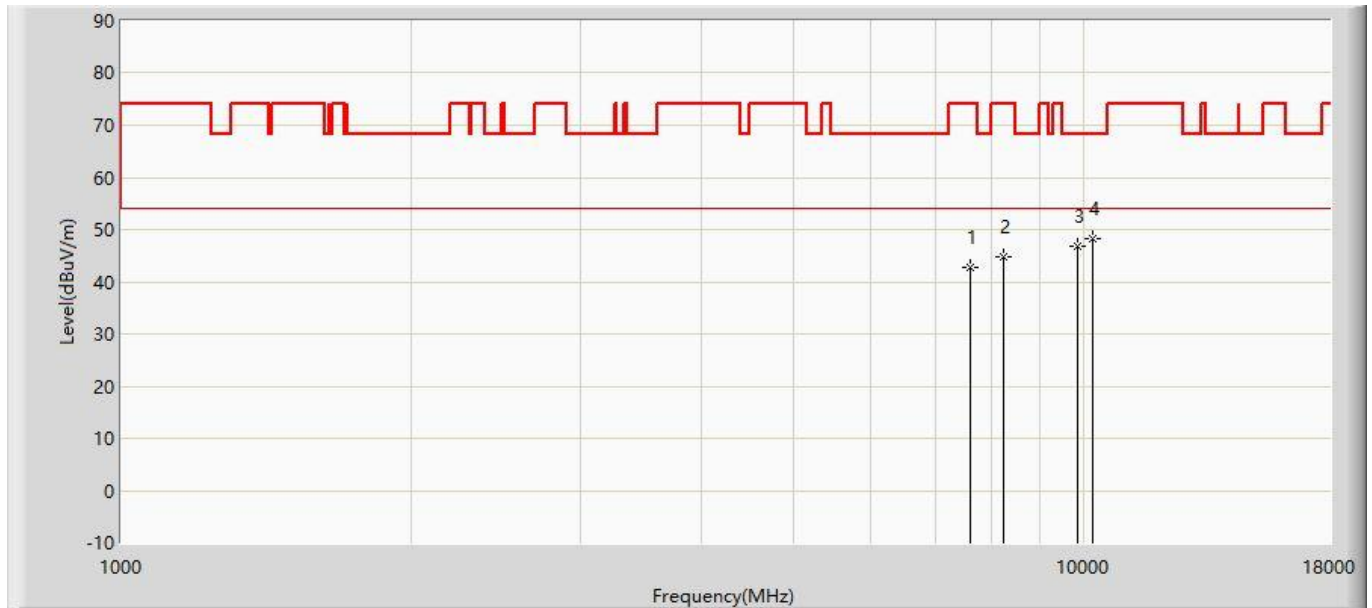


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	42.789	30.966	-31.211	74.000	11.822	PK
2			8233.500	44.920	32.585	-29.080	74.000	12.335	PK
3			9848.500	46.923	32.160	-21.277	68.200	14.763	PK
4		*	10214.000	48.150	32.201	-20.050	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5240MHz with OAW-AP1362 (CDD Mode)	

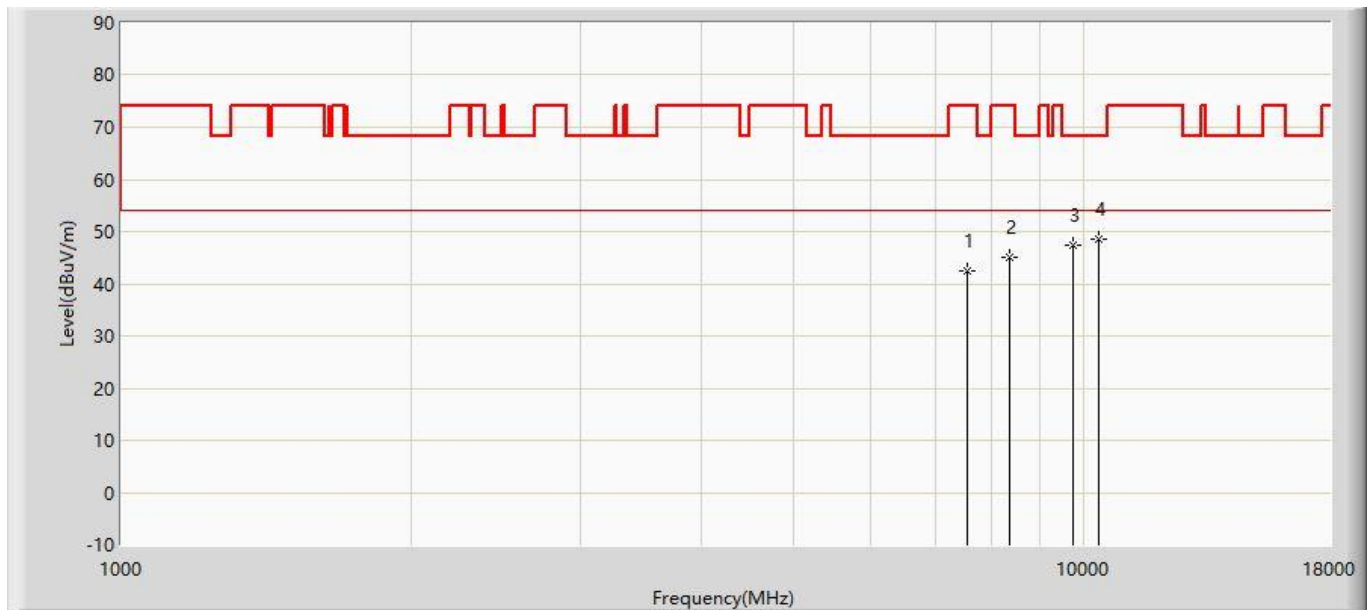


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7562.000	42.376	30.596	-31.624	74.000	11.780	PK
2			8378.000	44.989	32.588	-29.011	74.000	12.401	PK
3			9729.500	47.496	33.123	-20.704	68.200	14.373	PK
4		*	10367.000	48.451	32.010	-19.749	68.200	16.441	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5260MHz with OAW-AP1362 (CDD Mode)	

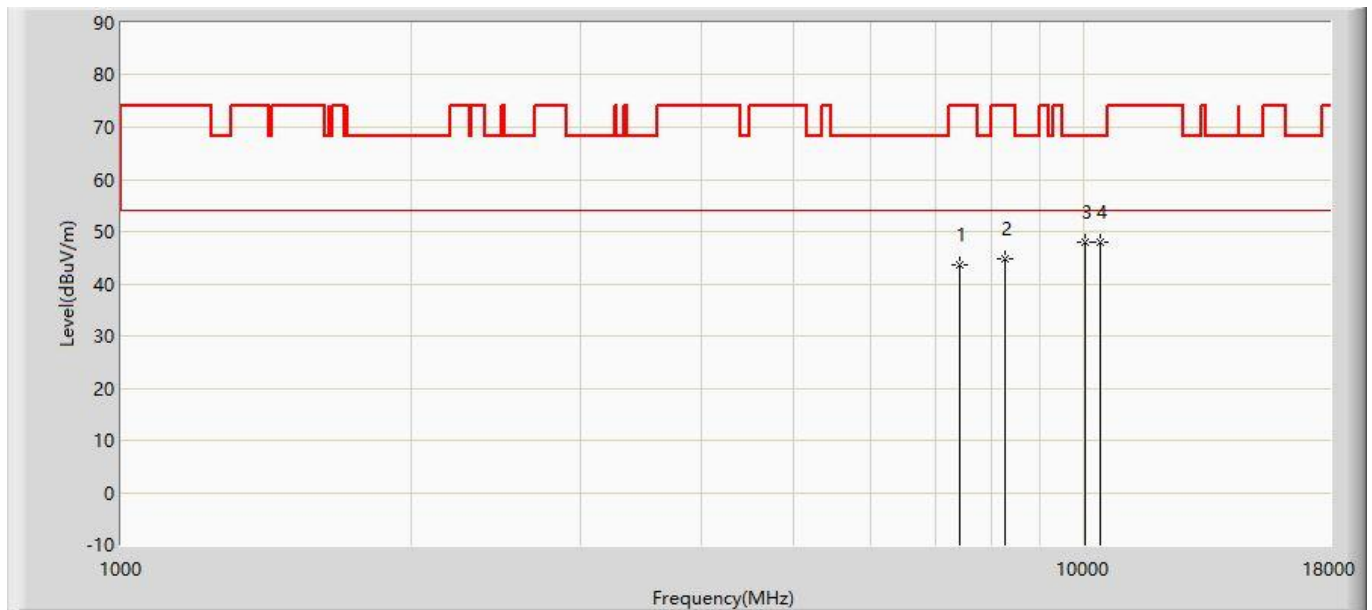


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	43.636	32.067	-30.364	74.000	11.569	PK
2			8276.000	44.919	32.565	-29.081	74.000	12.354	PK
3			10018.500	47.955	32.636	-20.245	68.200	15.318	PK
4		*	10392.500	47.993	31.470	-20.207	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5260MHz with OAW-AP1362 (CDD Mode)	

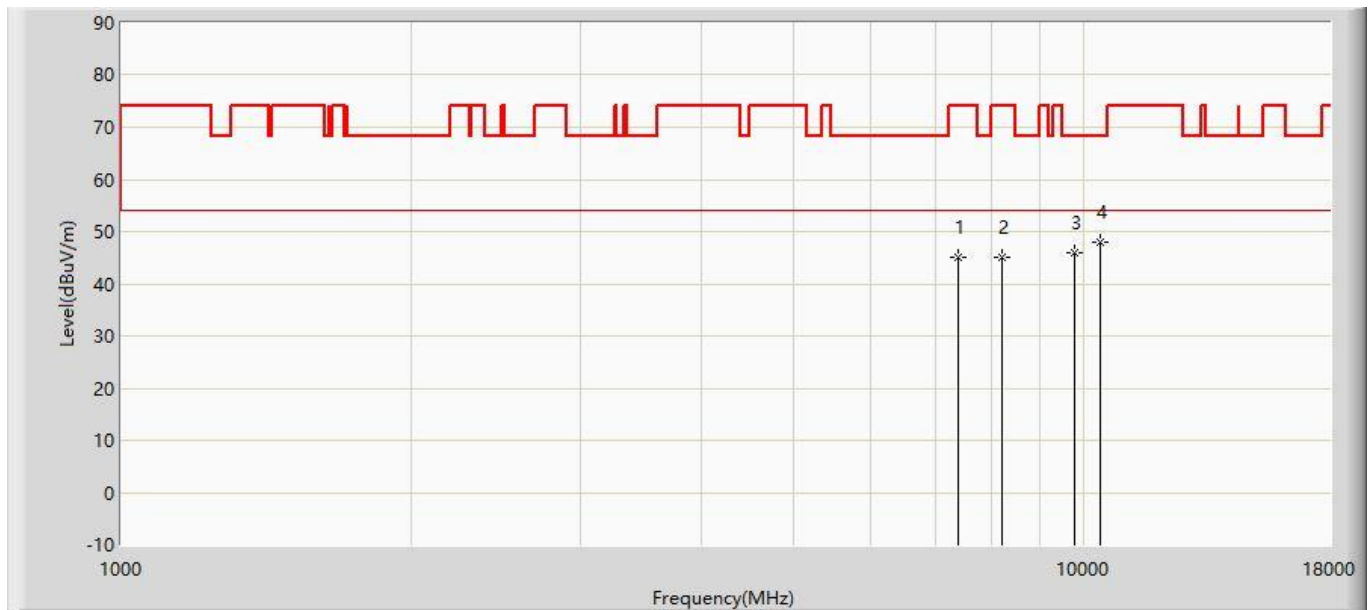


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	44.960	33.467	-29.040	74.000	11.493	PK
2			8216.500	44.982	32.654	-29.018	74.000	12.328	PK
3			9772.000	46.065	31.553	-22.135	68.200	14.512	PK
4		*	10384.000	47.982	31.486	-20.218	68.200	16.496	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5300MHz with OAW-AP1362 (CDD Mode)	

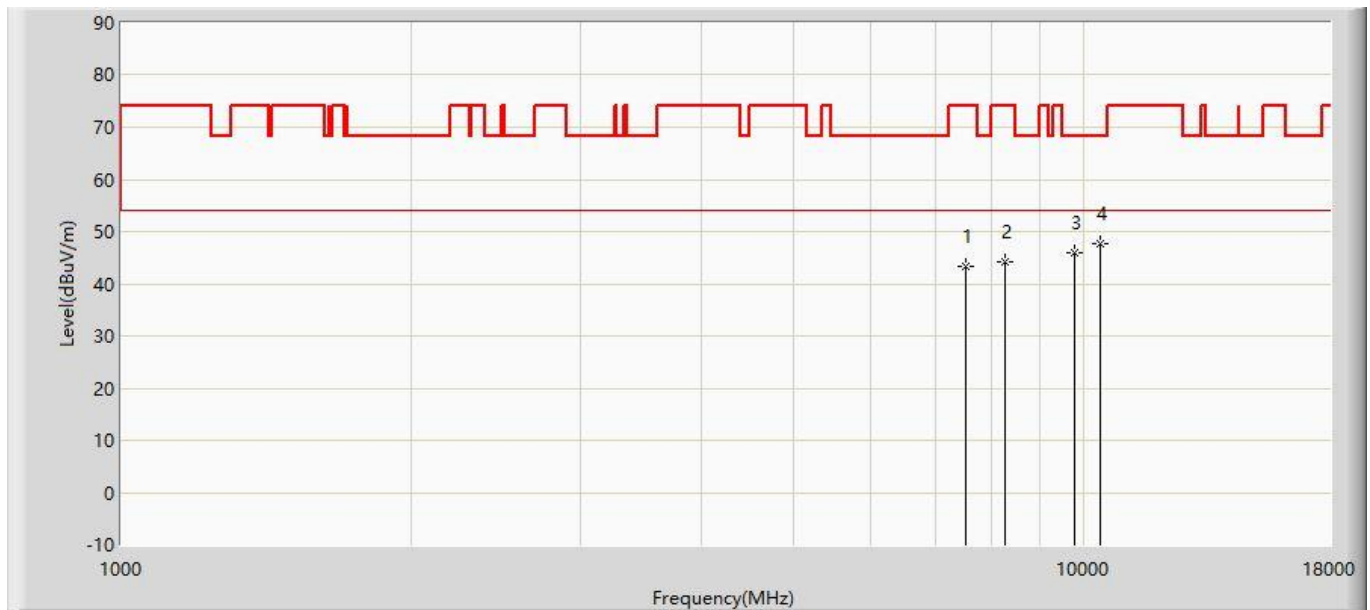


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7528.000	43.239	31.496	-30.761	74.000	11.743	PK
2			8276.000	44.107	31.753	-29.893	74.000	12.354	PK
3			9772.000	46.065	31.553	-22.135	68.200	14.512	PK
4		*	10375.500	47.700	31.231	-20.500	68.200	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5300MHz with OAW-AP1362 (CDD Mode)	

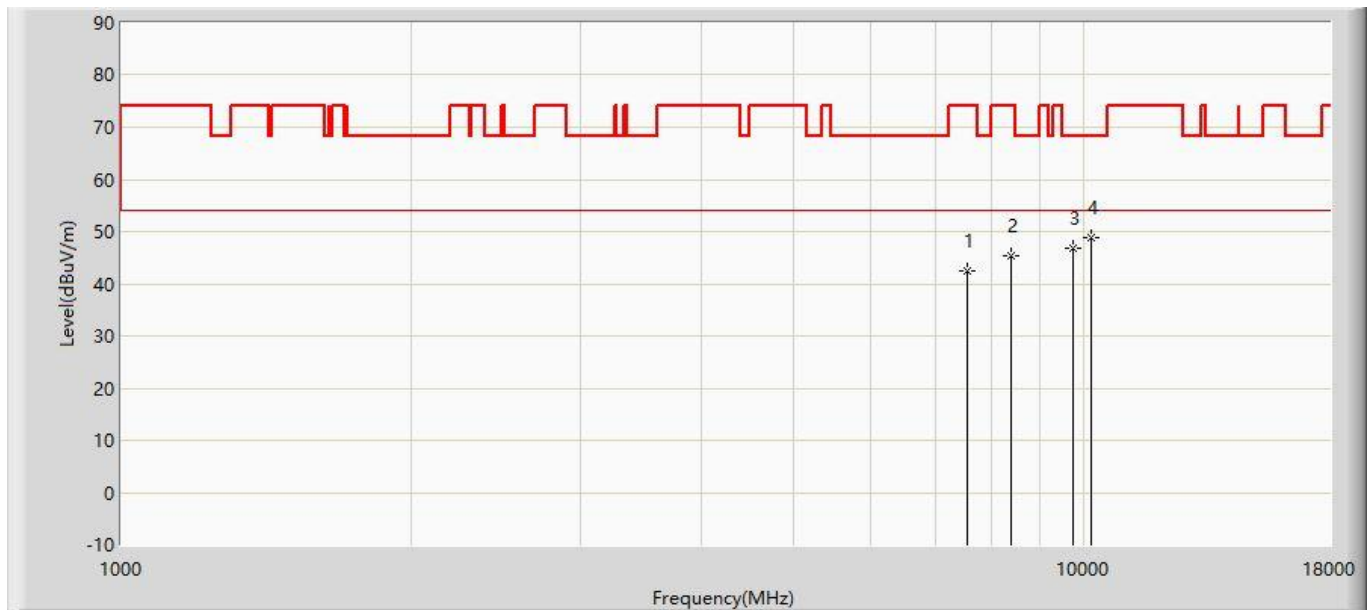


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7570.500	42.586	30.798	-31.414	74.000	11.789	PK
2			8403.500	45.220	32.808	-28.780	74.000	12.412	PK
3			9746.500	46.739	32.310	-21.461	68.200	14.428	PK
4		*	10180.000	48.972	33.132	-19.228	68.200	15.840	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5320MHz with OAW-AP1362 (CDD Mode)	

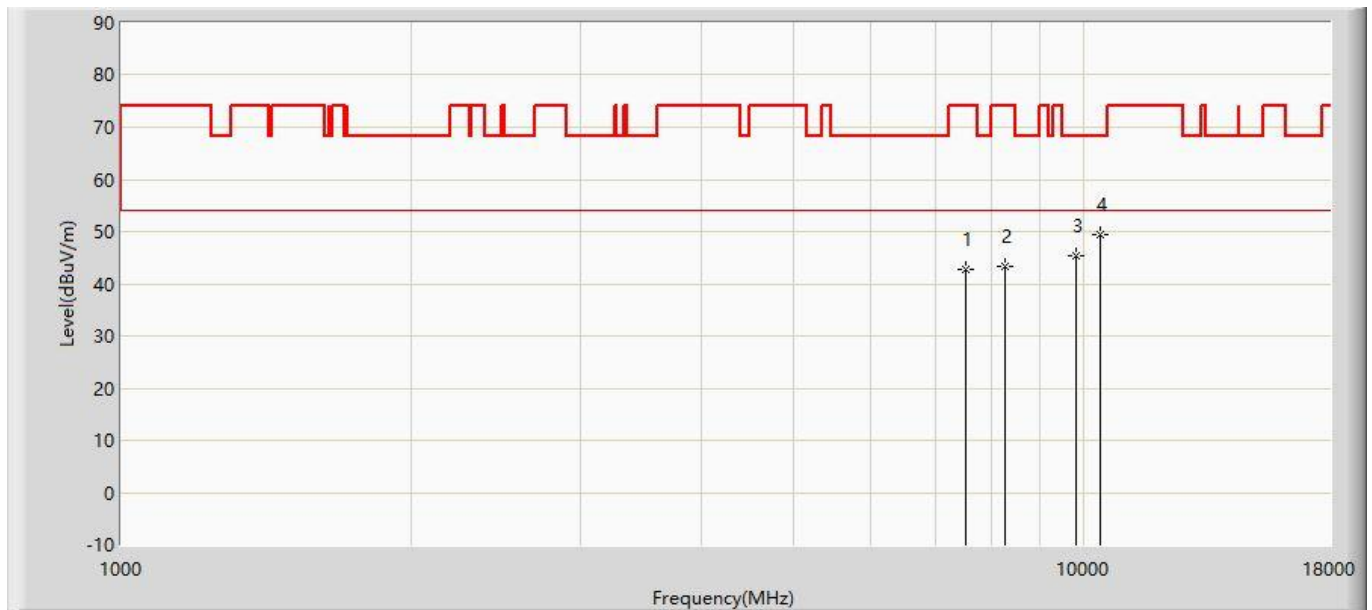


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7528.000	42.700	30.957	-31.300	74.000	11.743	PK
2			8276.000	43.237	30.883	-30.763	74.000	12.354	PK
3			9814.500	45.445	30.793	-22.755	68.200	14.652	PK
4		*	10392.500	49.544	33.021	-18.656	68.200	16.524	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5320MHz with OAW-AP1362 (CDD Mode)	

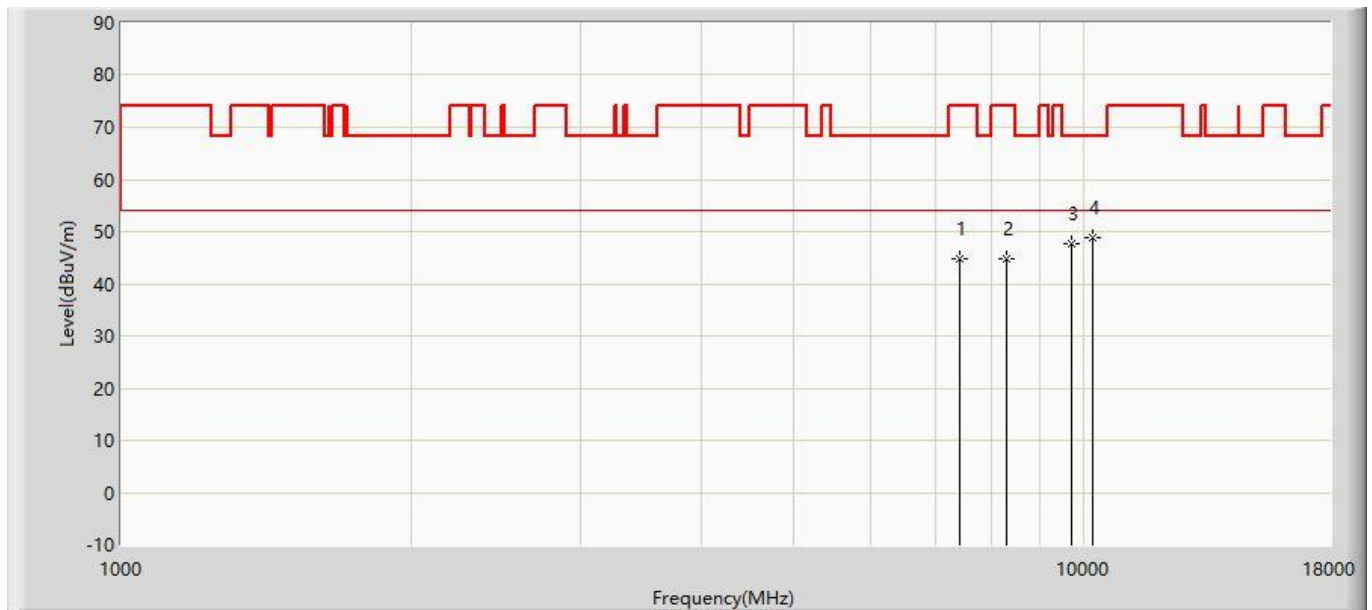


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7417.500	44.662	33.131	-29.338	74.000	11.530	PK
2			8293.000	44.870	32.508	-29.130	74.000	12.362	PK
3			9695.500	47.826	33.565	-20.374	68.200	14.261	PK
4		*	10205.500	48.969	33.047	-19.231	68.200	15.922	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5500MHz with OAW-AP1362 (CDD Mode)	

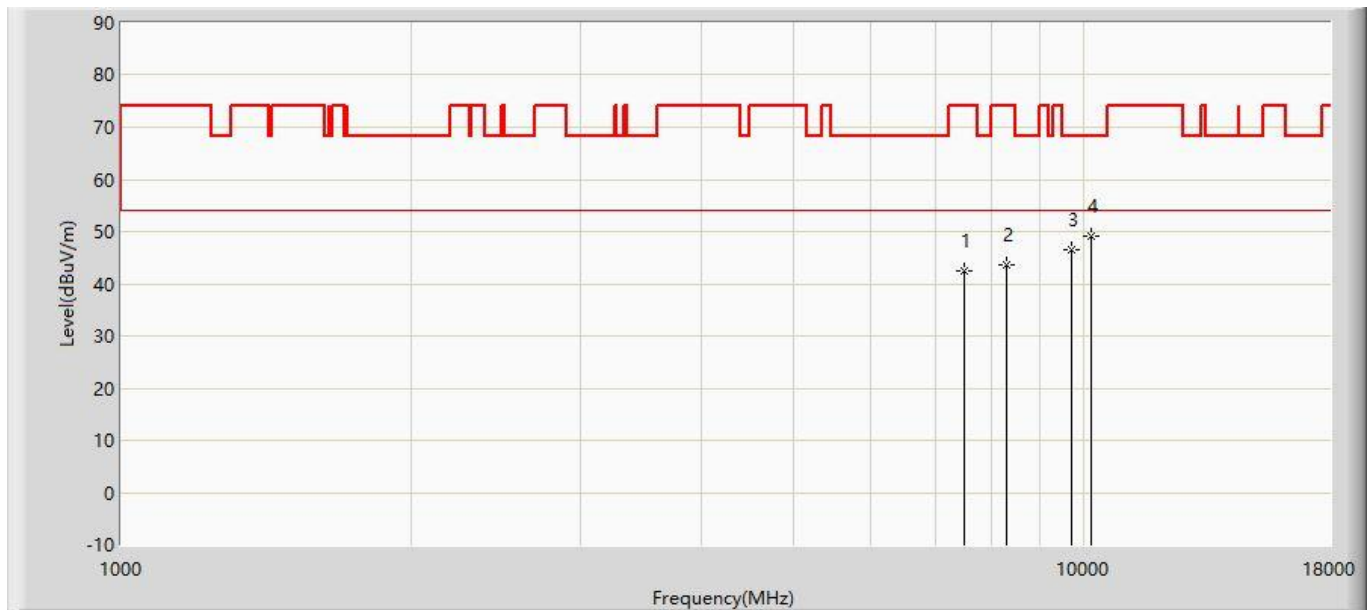


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	42.574	30.860	-31.426	74.000	11.714	PK
2			8310.000	43.594	31.225	-30.406	74.000	12.369	PK
3			9721.000	46.483	32.138	-21.717	68.200	14.345	PK
4		*	10188.500	49.153	33.286	-19.047	68.200	15.868	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5500MHz with OAW-AP1362 (CDD Mode)	

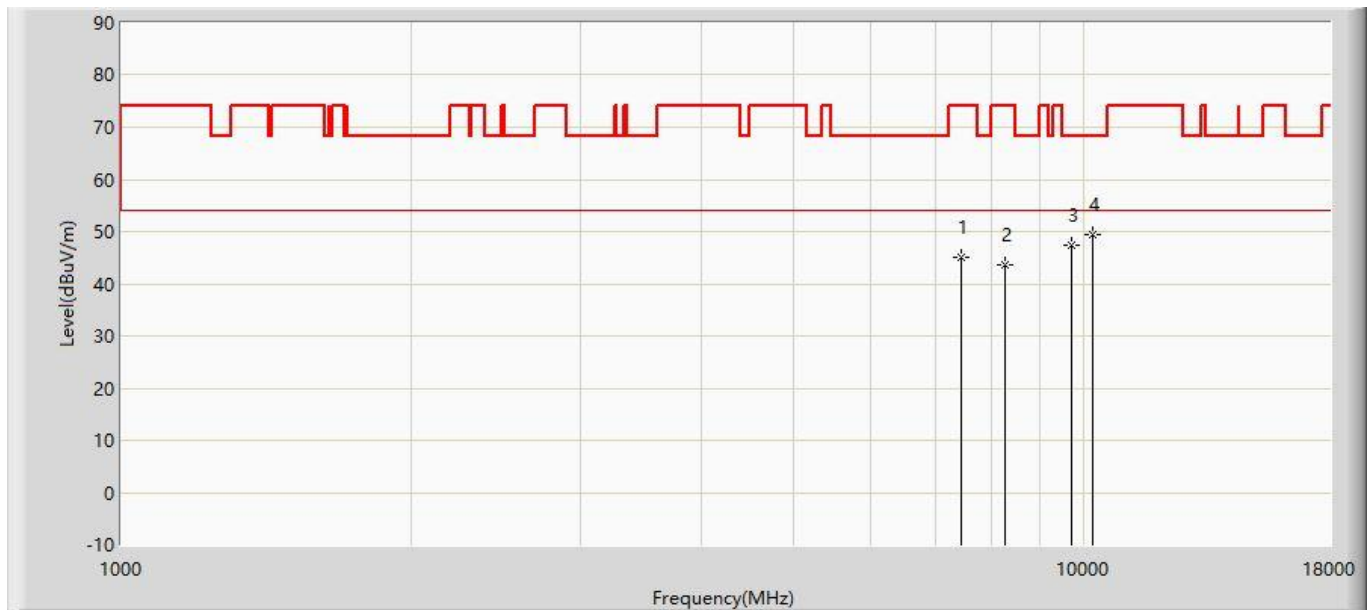

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7460.000	44.975	33.349	-29.025	74.000	11.626	PK
2			8276.000	43.515	31.161	-30.485	74.000	12.354	PK
3			9704.000	47.341	33.052	-20.859	68.200	14.289	PK
4		*	10222.500	49.501	33.524	-18.699	68.200	15.976	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5600MHz with OAW-AP1362 (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7579.000	42.447	30.650	-31.553	74.000	11.797	PK
2			8386.500	44.622	32.218	-29.378	74.000	12.404	PK
3			9653.000	47.292	33.170	-20.908	68.200	14.122	PK
4		*	10392.500	48.854	32.331	-19.346	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5600MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7596.000	42.888	31.074	-31.112	74.000	11.814	PK
2			8310.000	43.940	31.571	-30.060	74.000	12.369	PK
3			9704.000	46.114	31.825	-22.086	68.200	14.289	PK
4		*	10214.000	48.737	32.788	-19.463	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5700MHz with OAW-AP1362 (CDD Mode)	

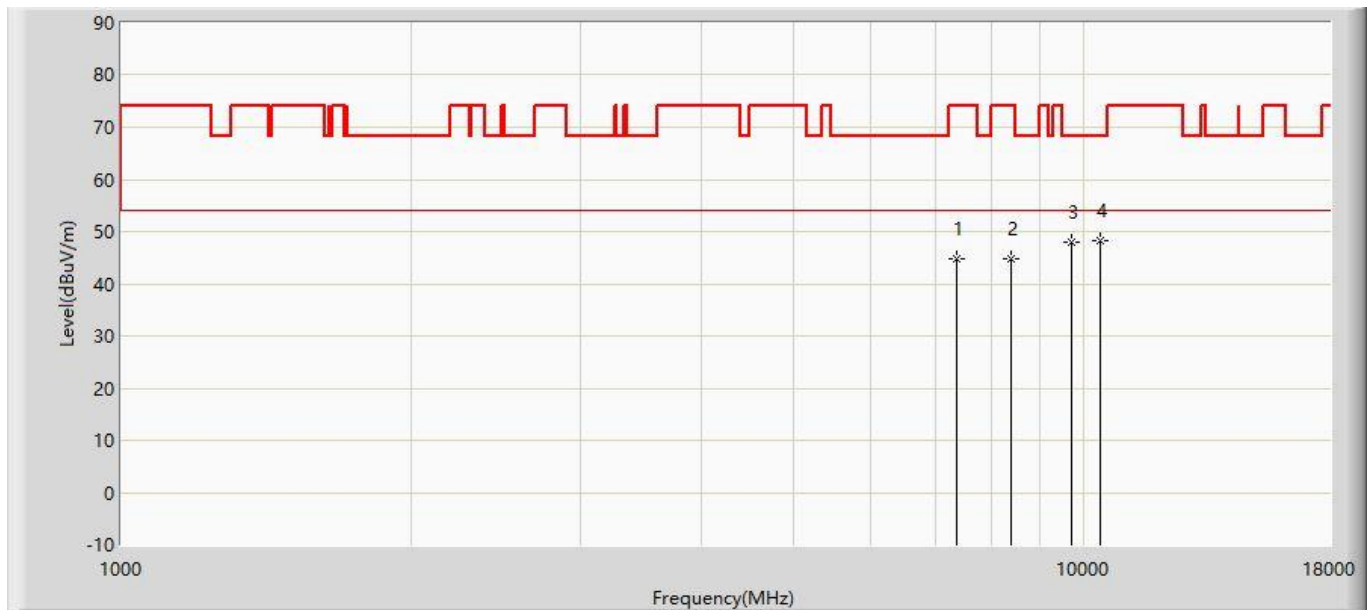


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7366.500	44.920	33.503	-29.080	74.000	11.418	PK
2			8386.500	44.842	32.438	-29.158	74.000	12.404	PK
3			9695.500	48.015	33.754	-20.185	68.200	14.261	PK
4		*	10375.500	48.299	31.830	-19.901	68.200	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5700MHz with OAW-AP1362 (CDD Mode)	

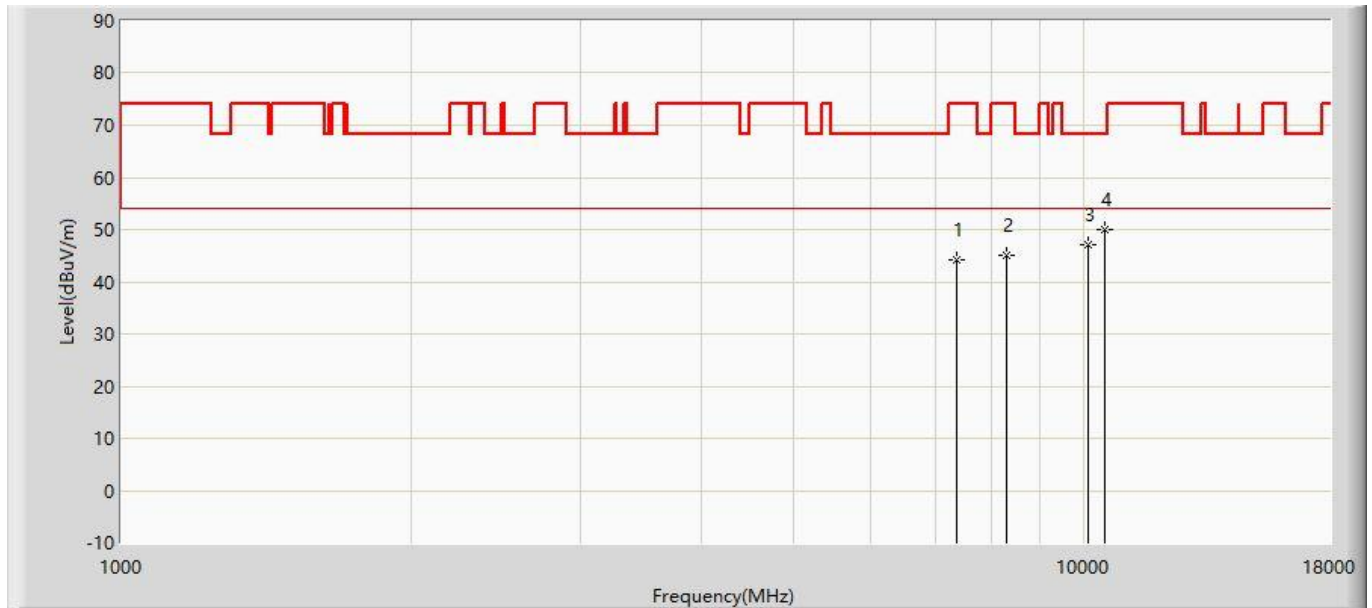


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7366.500	44.344	32.927	-29.656	74.000	11.418	PK
2			8293.000	45.032	32.670	-28.968	74.000	12.362	PK
3			10103.500	47.169	31.576	-21.031	68.200	15.593	PK
4		*	10494.500	50.043	33.194	-18.157	68.200	16.849	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5720MHz with OAW-AP1362 (CDD Mode)	

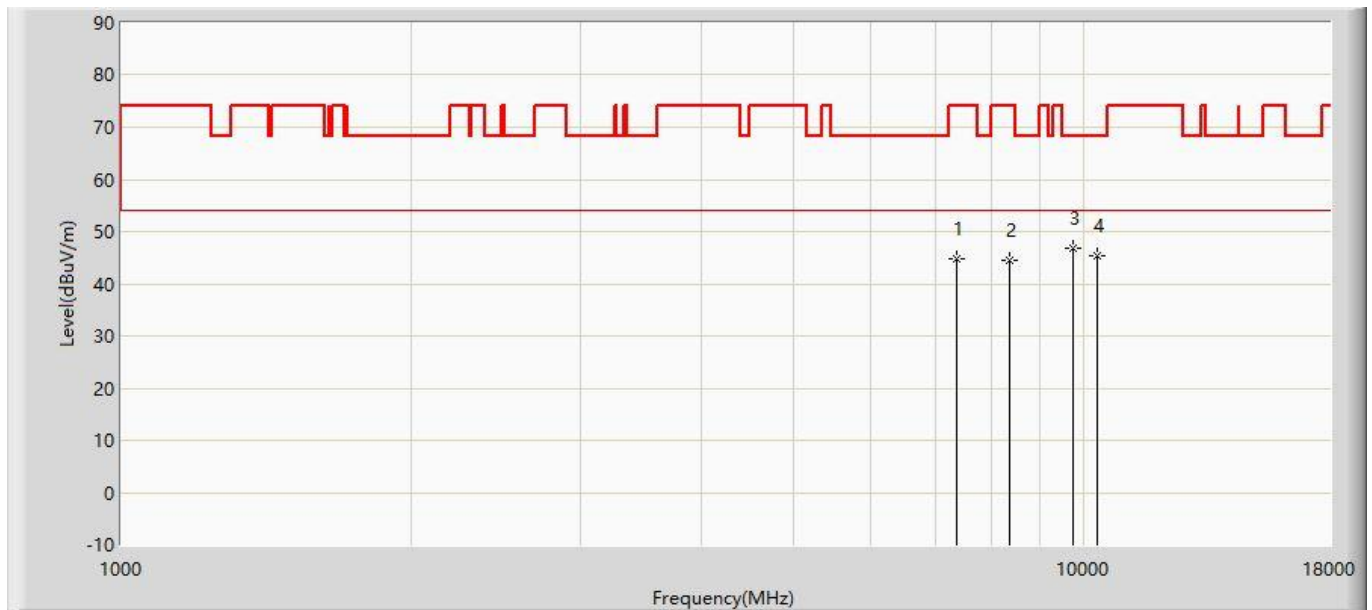


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7383.500	44.699	33.245	-29.301	74.000	11.455	PK
2			8378.000	44.520	32.119	-29.480	74.000	12.401	PK
3		*	9746.500	46.780	32.351	-21.420	68.200	14.428	PK
4			10307.500	45.297	29.046	-22.903	68.200	16.251	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5720MHz with OAW-AP1362 (CDD Mode)	

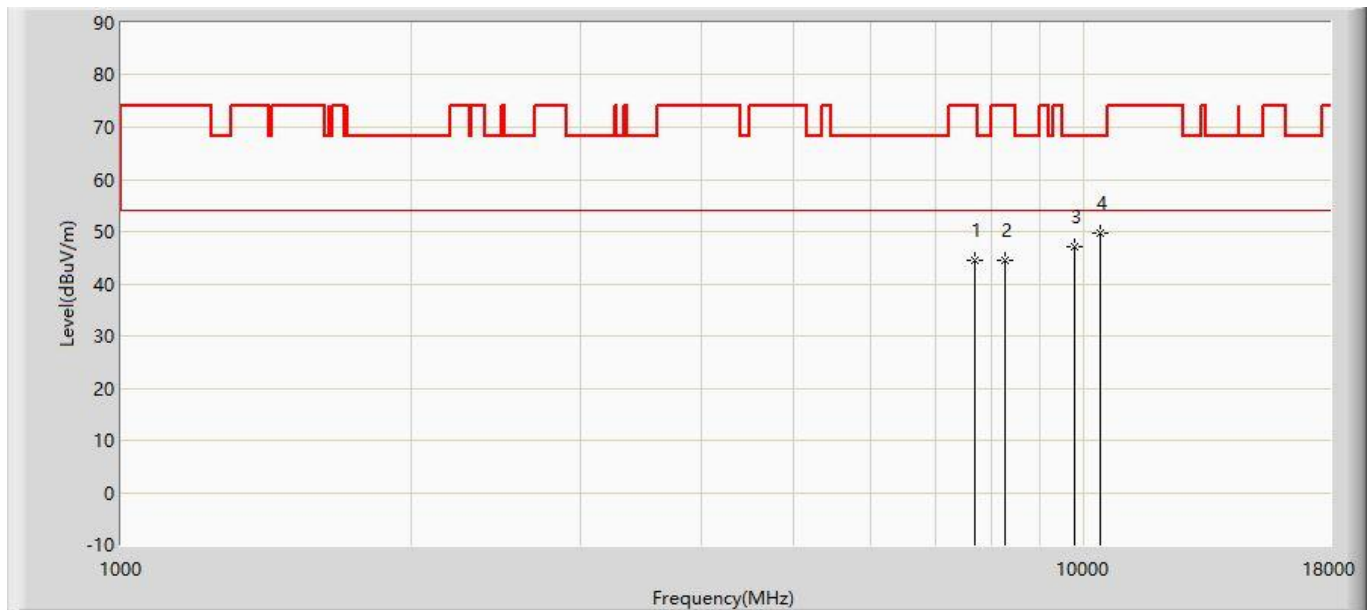

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7689.500	44.562	32.653	-29.438	74.000	11.910	PK
2			8276.000	44.466	32.112	-29.534	74.000	12.354	PK
3			9772.000	47.219	32.707	-20.981	68.200	14.512	PK
4		*	10401.000	49.603	33.052	-18.597	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5745MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7579.000	43.358	31.561	-30.642	74.000	11.797	PK
2			8208.000	44.552	32.228	-29.448	74.000	12.324	PK
3			9755.000	47.101	32.645	-21.099	68.200	14.456	PK
4		*	10375.500	48.992	32.523	-19.208	68.200	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5745MHz with OAW-AP1362 (CDD Mode)	

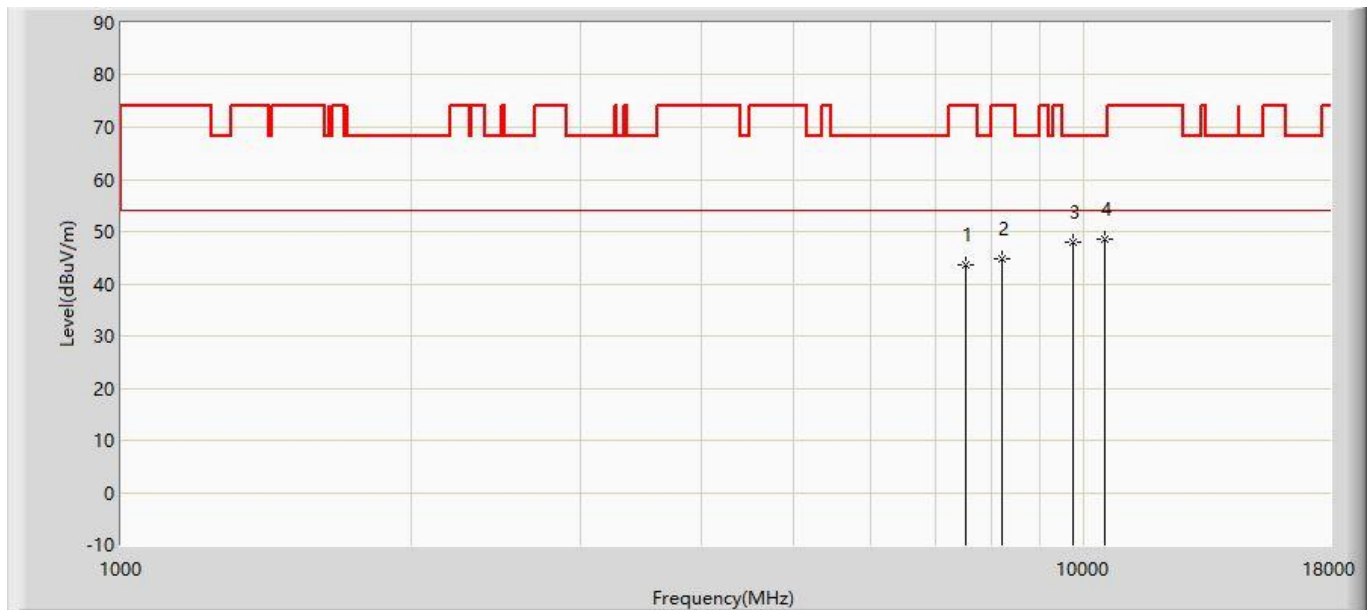


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7545.000	43.689	31.928	-30.311	74.000	11.761	PK
2			8225.000	44.892	32.560	-29.108	74.000	12.332	PK
3			9755.000	48.087	33.631	-20.113	68.200	14.456	PK
4		*	10494.500	48.542	31.693	-19.658	68.200	16.849	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5785MHz with OAW-AP1362 (CDD Mode)	

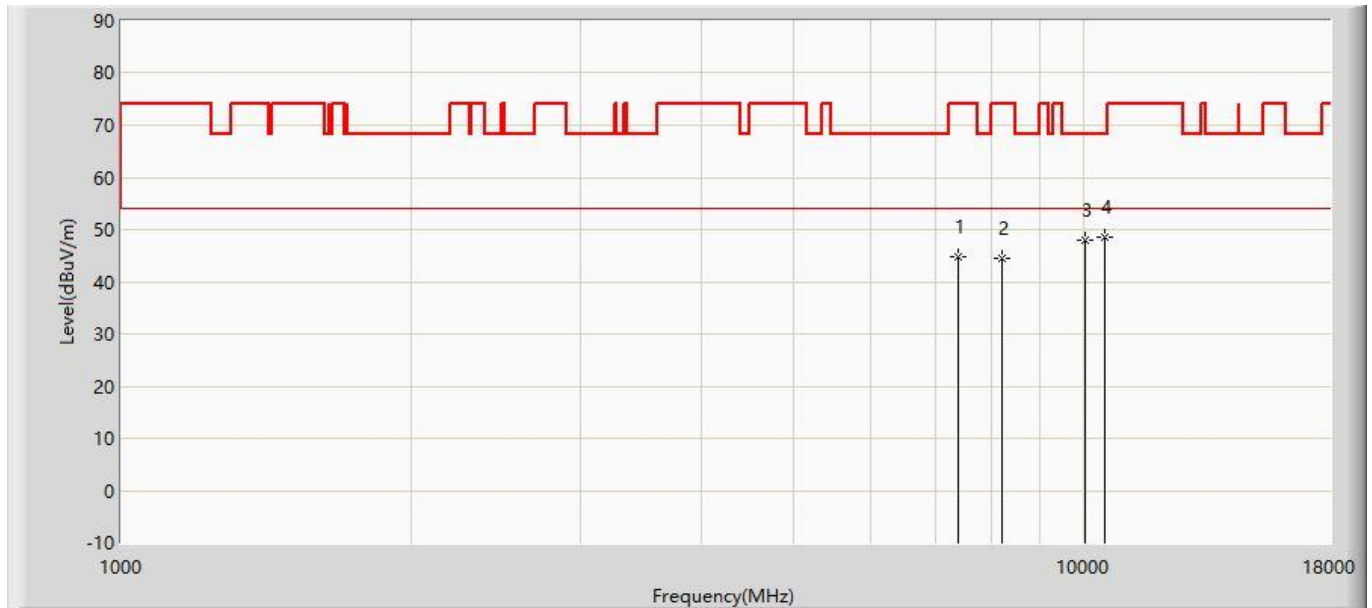


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	44.850	33.338	-29.150	74.000	11.512	PK
2			8208.000	44.566	32.242	-29.434	74.000	12.324	PK
3			10018.500	47.906	32.587	-20.294	68.200	15.318	PK
4		*	10503.000	48.568	31.695	-19.632	68.200	16.873	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5785MHz with OAW-AP1362 (CDD Mode)	

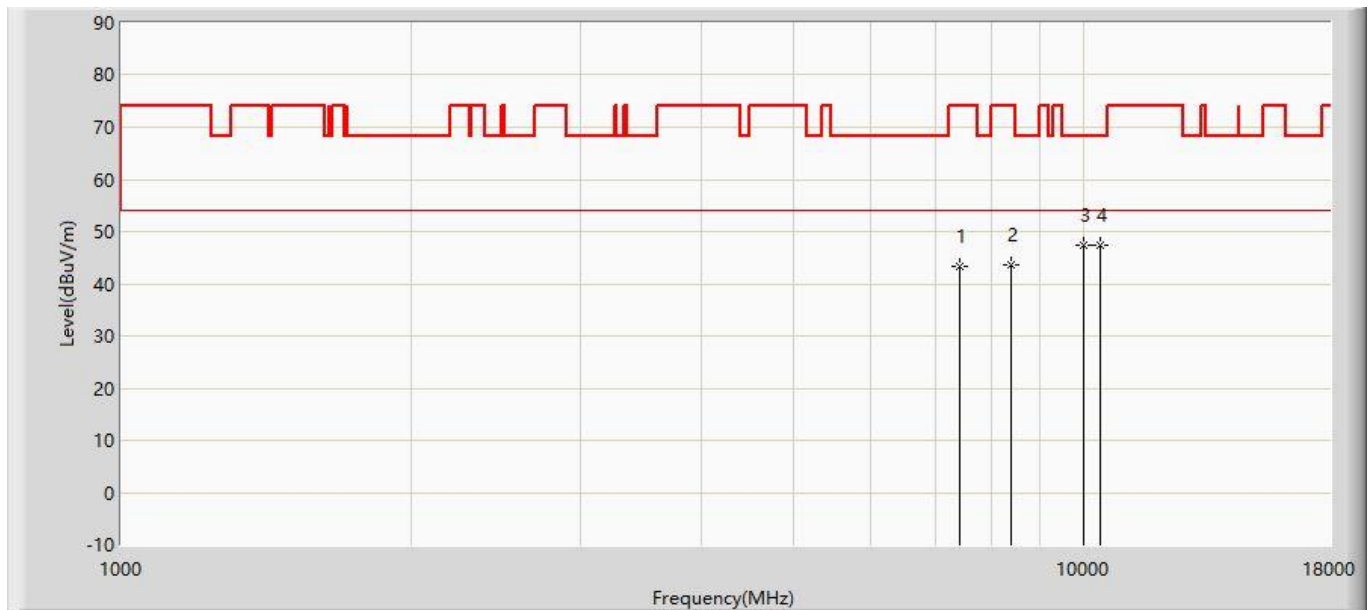


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7426.000	43.275	31.726	-30.725	74.000	11.549	PK
2			8395.000	43.662	31.254	-30.338	74.000	12.408	PK
3		*	10001.500	47.485	32.220	-20.715	68.200	15.265	PK
4			10392.500	47.332	30.809	-20.868	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz with OAW-AP1362 (CDD Mode)	

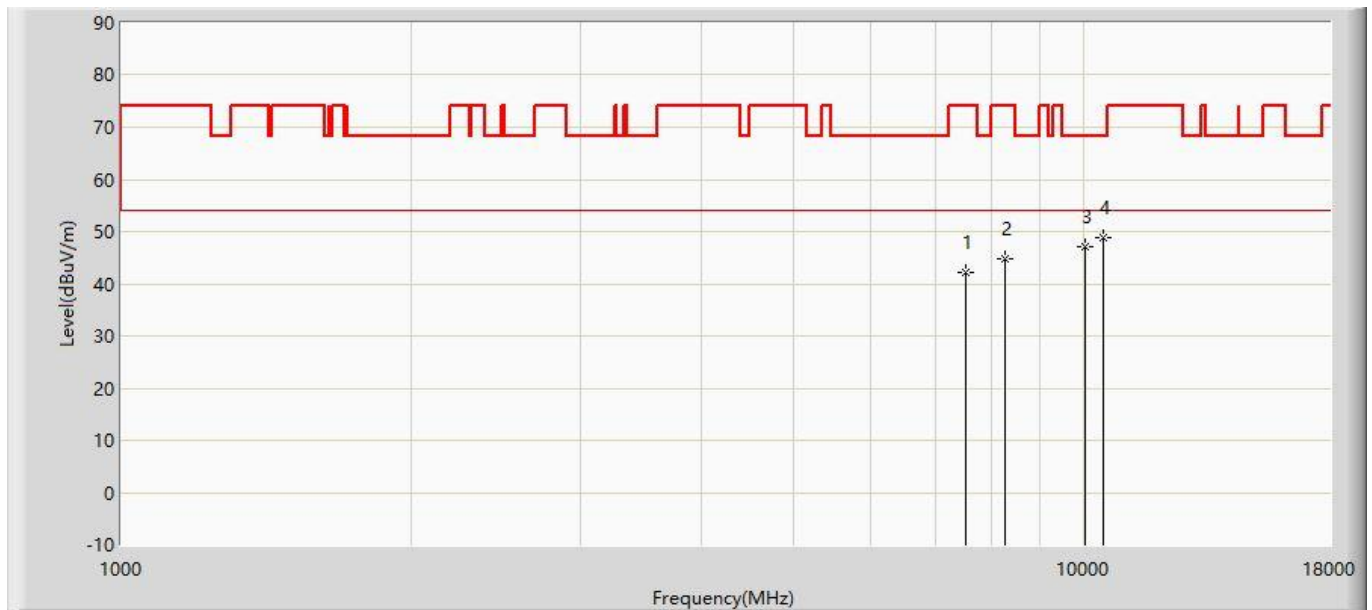


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7545.000	42.136	32.747	-31.864	74.000	9.389	PK
2			8276.000	44.707	35.227	-29.293	74.000	9.480	PK
3			10027.000	47.231	35.581	-20.969	68.200	11.650	PK
4		*	10486.000	48.734	35.890	-19.466	68.200	12.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz with OAW-AP1362 (CDD Mode)	

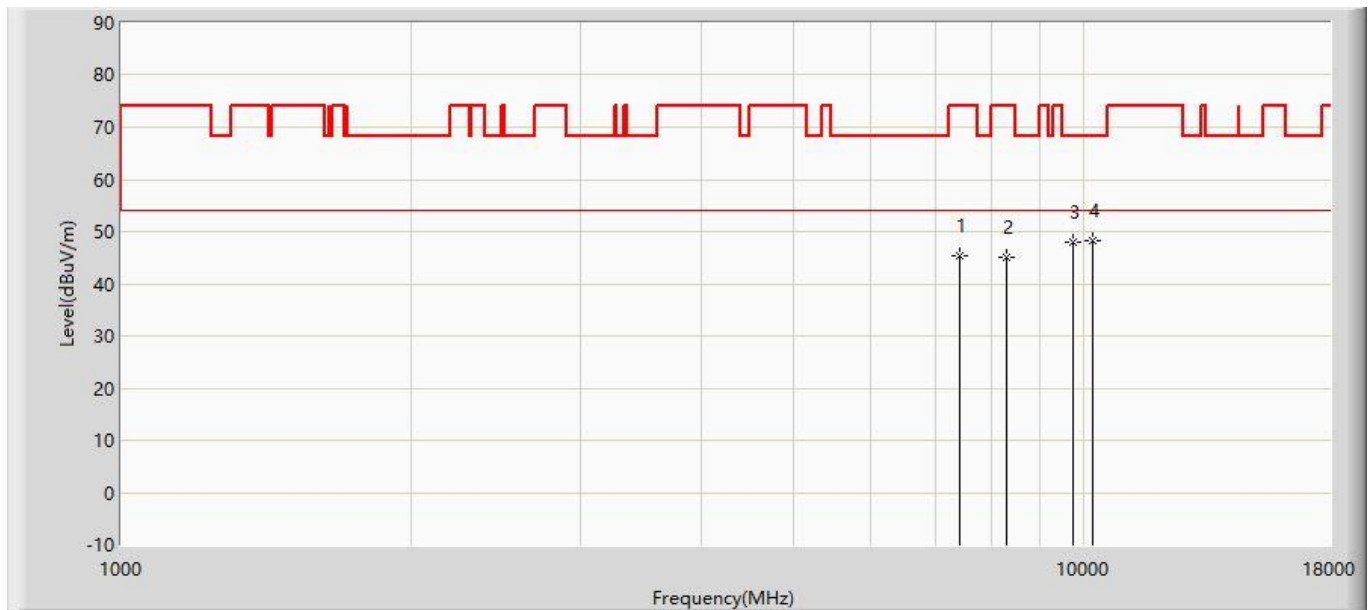

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7426.000	45.269	33.720	-28.731	74.000	11.549	PK
2			8310.000	45.088	32.719	-28.912	74.000	12.369	PK
3			9729.500	47.860	33.487	-20.340	68.200	14.373	PK
4		*	10214.000	48.351	32.402	-19.849	68.200	15.949	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7613.000	45.205	33.374	-28.795	74.000	11.831	PK
2			8310.000	46.111	33.742	-27.889	74.000	12.369	PK
3			9627.500	47.770	33.732	-20.430	68.200	14.038	PK
4		*	10401.000	48.916	32.365	-19.284	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1362 (CDD Mode)	

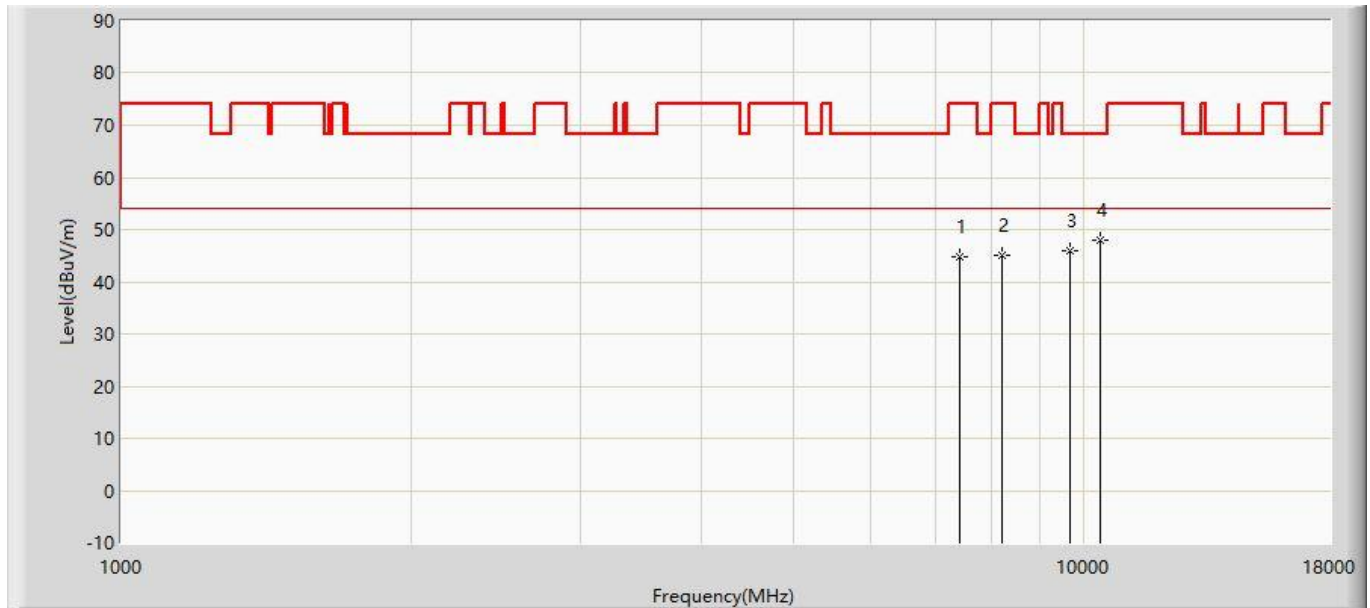


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.761	33.192	-29.239	74.000	11.569	PK
2			8225.000	44.987	32.655	-29.013	74.000	12.332	PK
3			9678.500	45.922	31.717	-22.278	68.200	14.205	PK
4		*	10401.000	48.101	31.550	-20.099	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5220MHz with OAW-AP1362 (CDD Mode)	

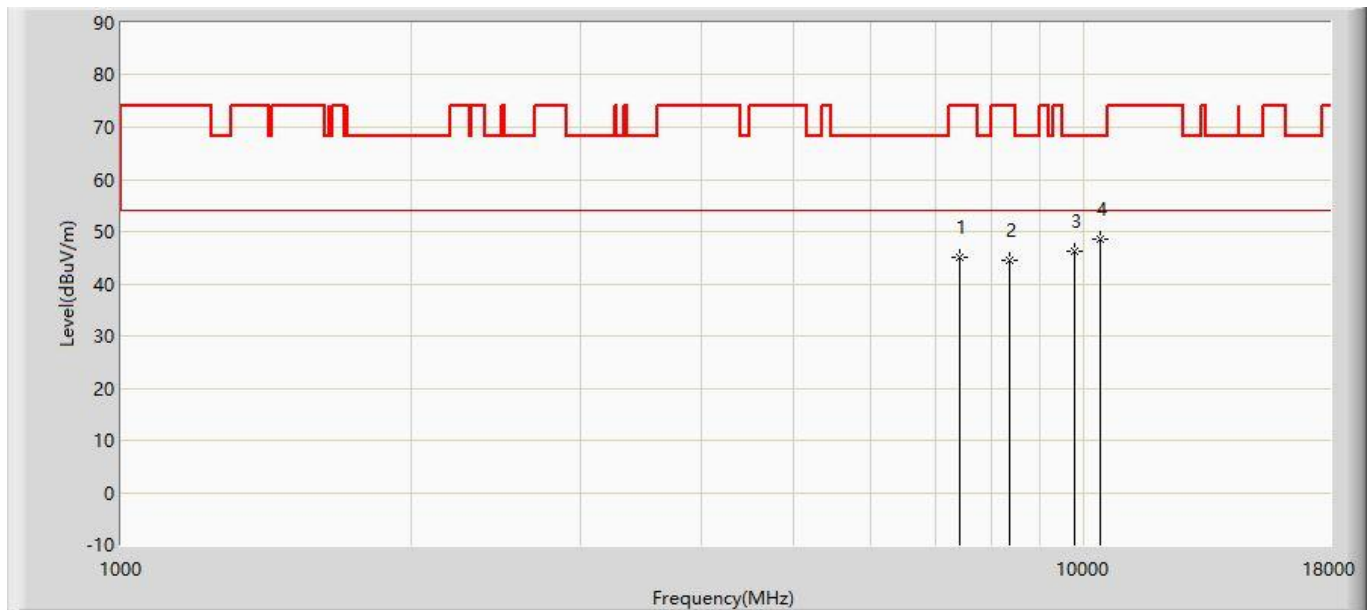


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7426.000	45.125	33.576	-28.875	74.000	11.549	PK
2			8378.000	44.621	32.220	-29.379	74.000	12.401	PK
3			9789.000	46.097	31.529	-22.103	68.200	14.568	PK
4		*	10375.500	48.520	32.051	-19.680	68.200	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5220MHz with OAW-AP1362 (CDD Mode)	

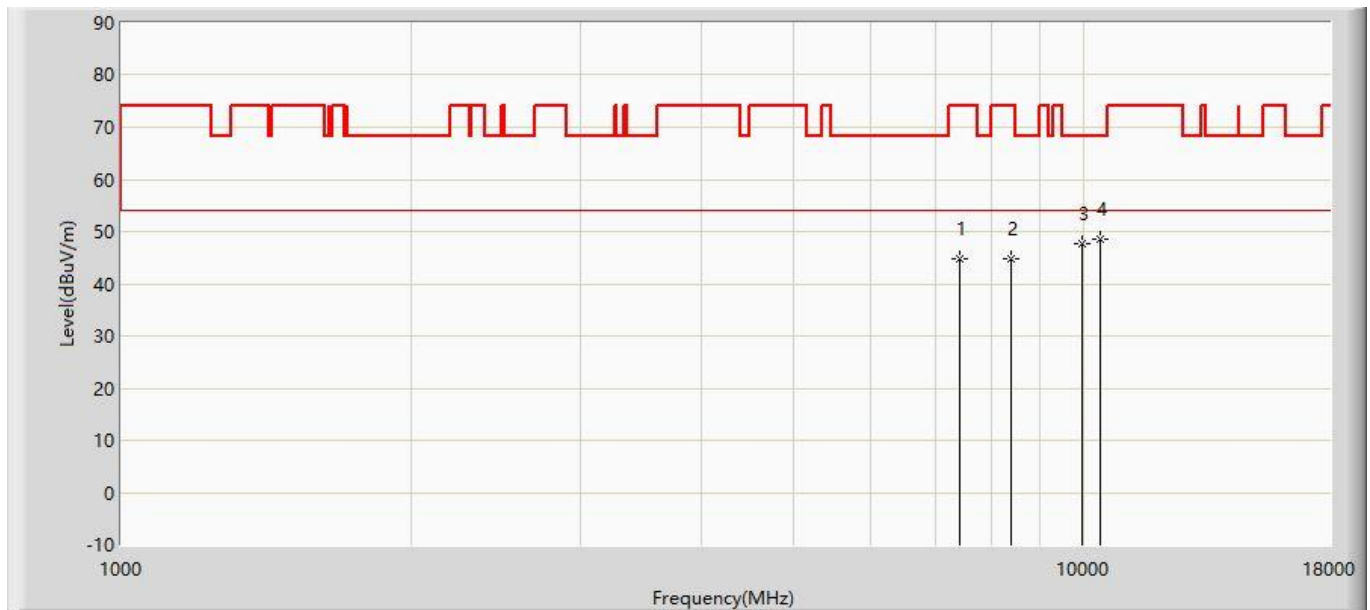

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.816	33.247	-29.184	74.000	11.569	PK
2			8386.500	44.816	32.412	-29.184	74.000	12.404	PK
3			9950.500	47.759	32.662	-20.441	68.200	15.097	PK
4		*	10375.500	48.520	32.051	-19.680	68.200	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5240MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	43.059	31.236	-30.941	74.000	11.822	PK
2			8182.500	44.558	32.246	-29.442	74.000	12.312	PK
3			9551.000	47.439	33.652	-20.761	68.200	13.787	PK
4		*	10375.500	48.070	31.601	-20.130	68.200	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5240MHz with OAW-AP1362 (CDD Mode)	

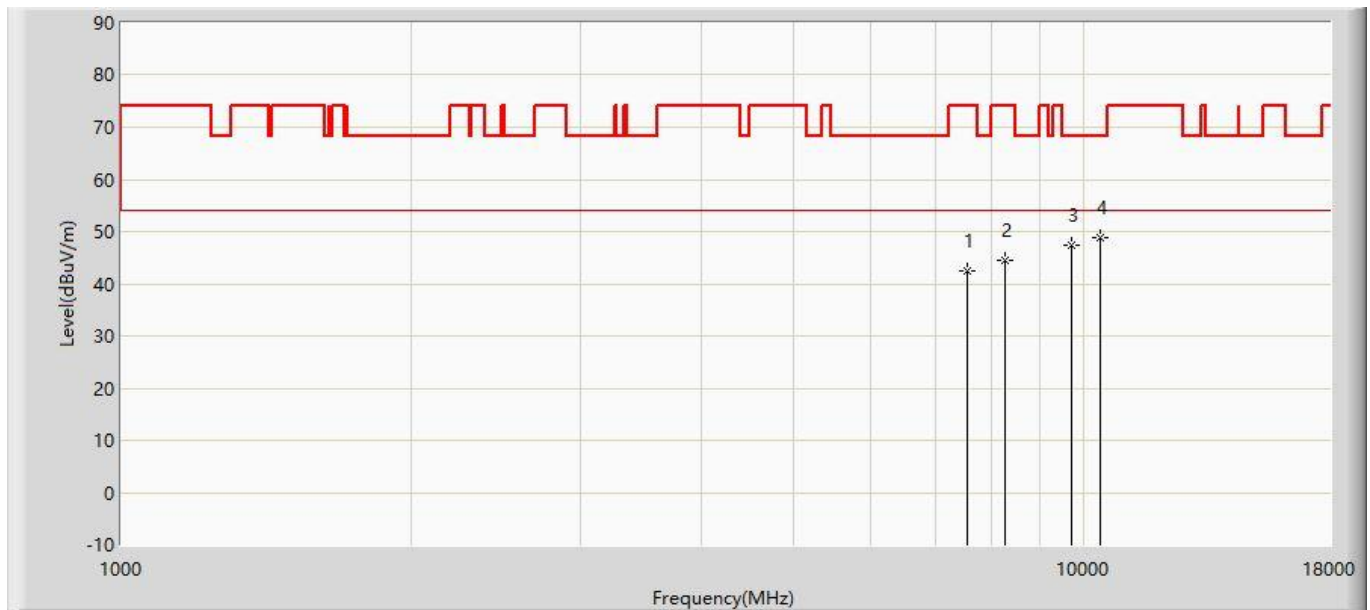


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7570.500	42.524	30.736	-31.476	74.000	11.789	PK
2			8276.000	44.568	32.214	-29.432	74.000	12.354	PK
3			9704.000	47.494	33.205	-20.706	68.200	14.289	PK
4		*	10392.500	48.792	32.269	-19.408	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5260MHz with OAW-AP1362 (CDD Mode)	

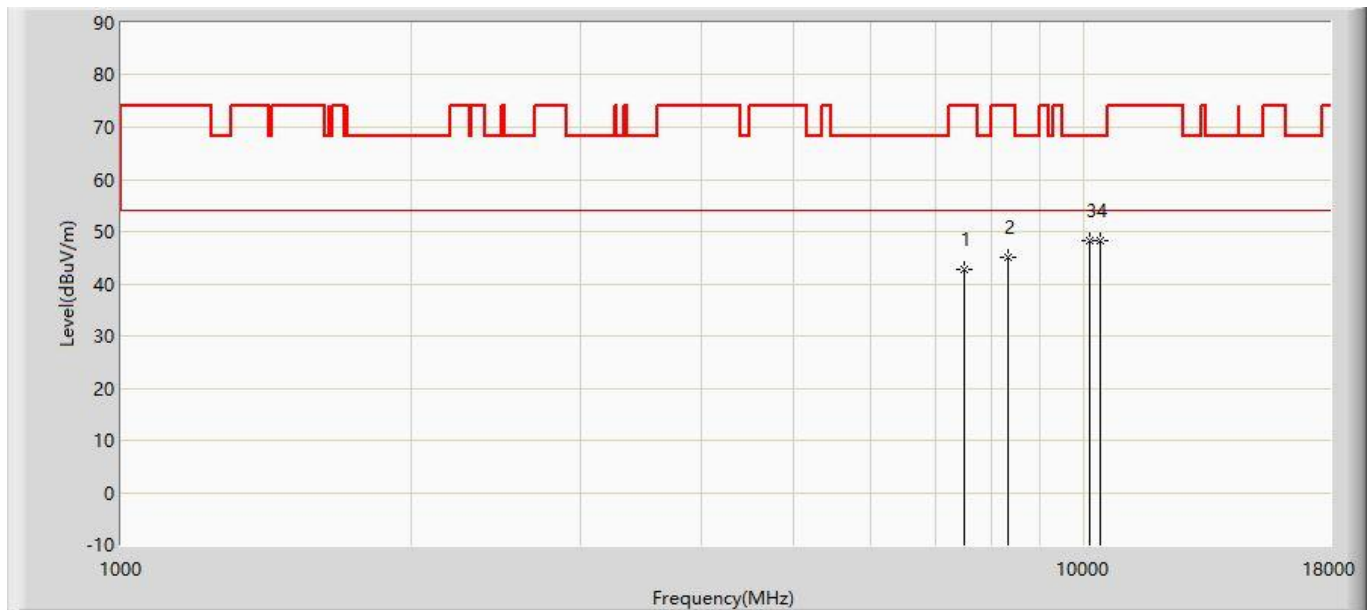

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7511.000	42.891	31.165	-31.109	74.000	11.726	PK
2			8344.000	45.051	32.667	-28.949	74.000	12.384	PK
3			10146.000	48.121	32.391	-20.079	68.200	15.730	PK
4		*	10392.500	48.306	31.783	-19.894	68.200	16.524	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).