


EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

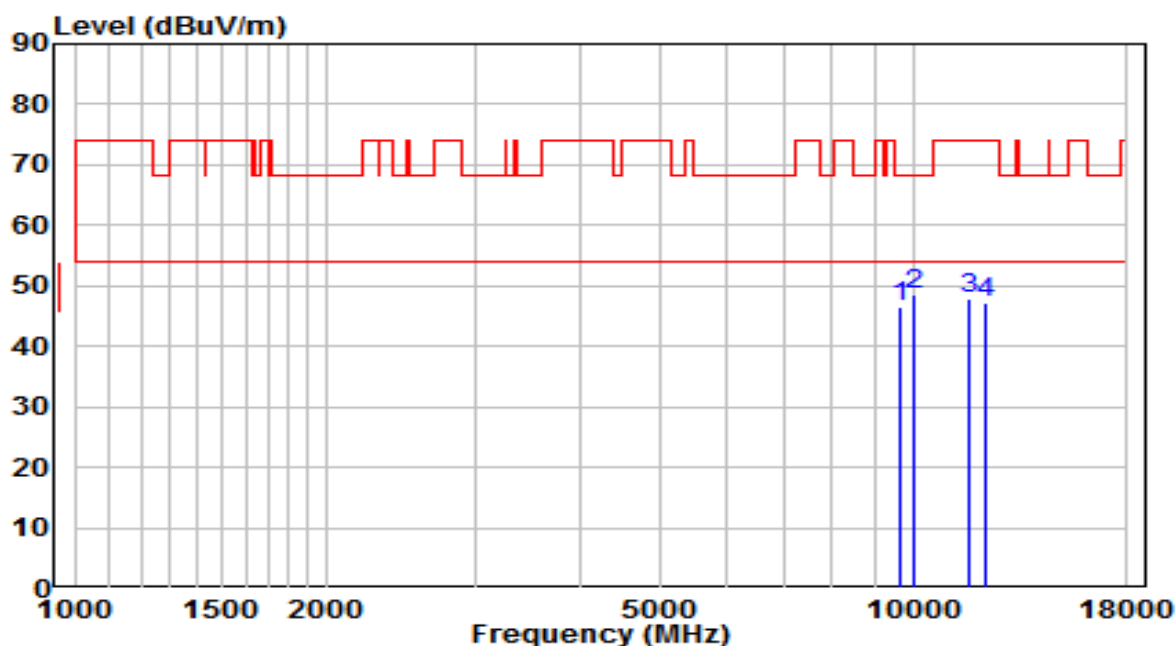


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9678.500	32.16	14.21	46.36	-21.84	68.20	Peak
2	* 10001.500	33.14	15.26	48.41	-19.79	68.20	Peak
3	11650.500	29.83	17.98	47.81	-26.19	74.00	Peak
4	12160.500	29.29	17.82	47.10	-26.90	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5580MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

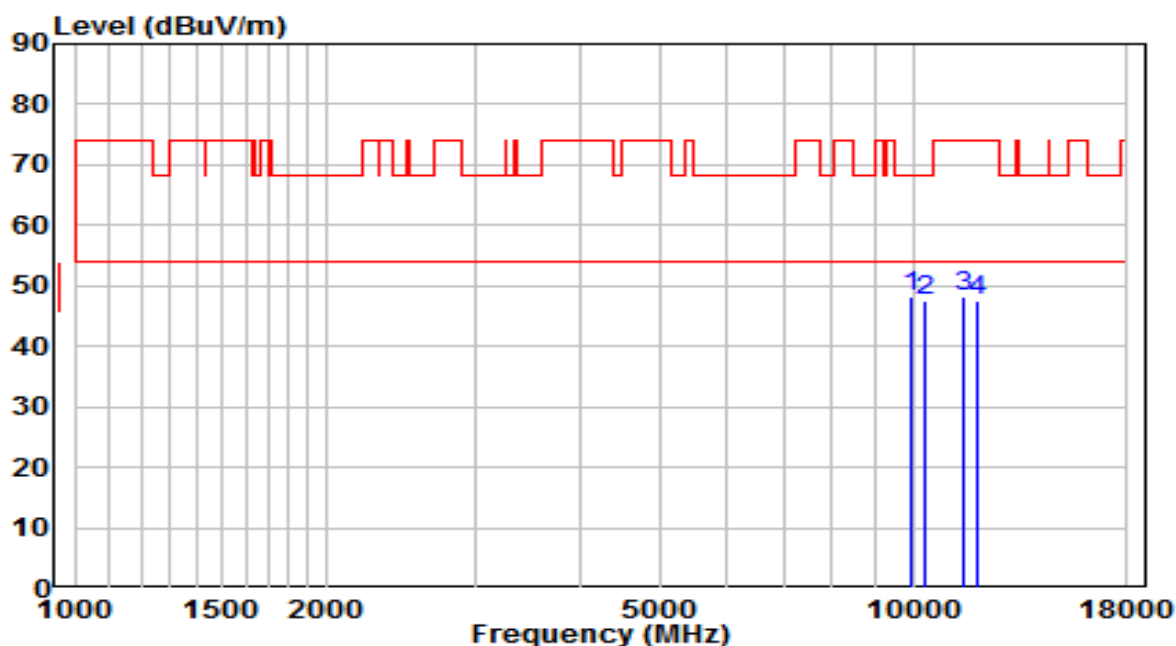


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9942.000	33.03	15.07	48.10	-20.10	68.20	Peak
2		10324.500	31.36	16.31	47.67	-20.53	68.20	Peak
3		11489.000	30.21	18.04	48.25	-25.75	74.00	Peak
4		11948.000	29.77	17.84	47.62	-26.38	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5580MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

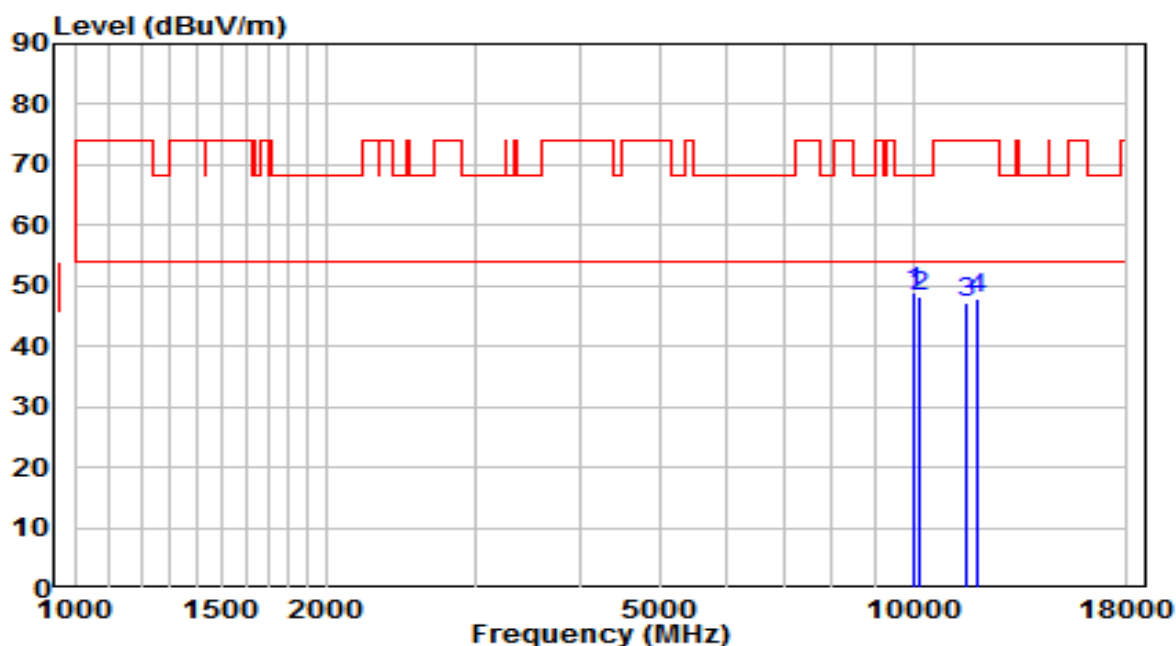


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.59	15.26	48.86	-19.34	68.20	Peak
2		10163.000	32.46	15.78	48.25	-19.95	68.20	Peak
3		11531.500	29.28	18.04	47.32	-26.68	74.00	Peak
4		11905.500	29.97	17.86	47.83	-26.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

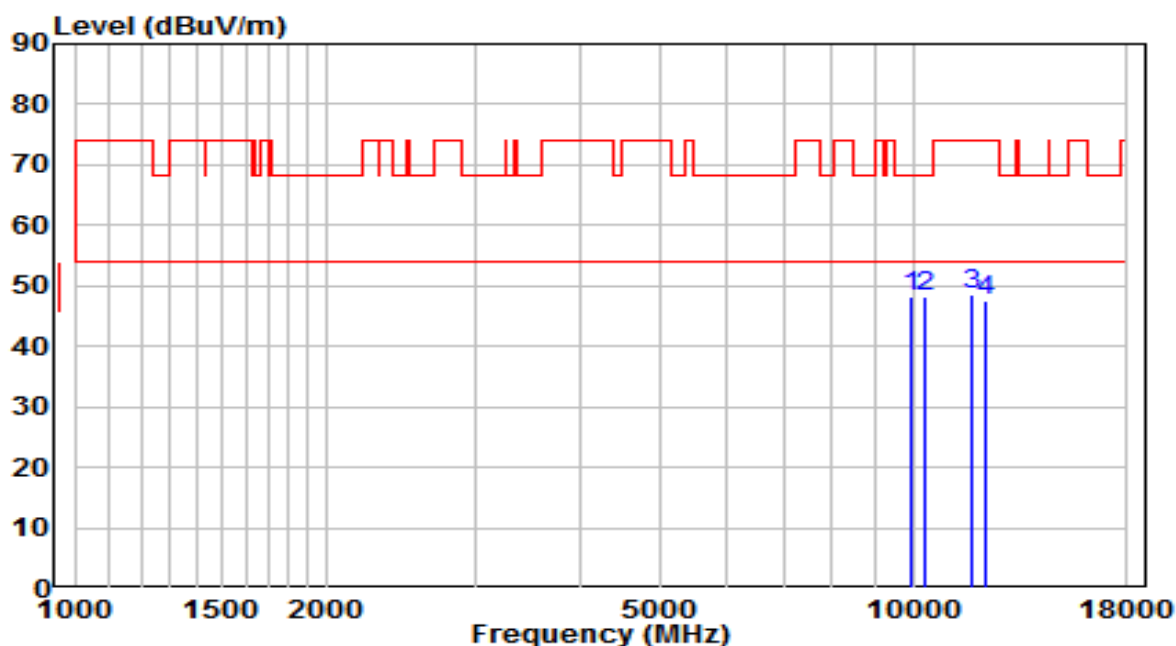


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9950.500	33.23	15.10	48.33	-19.87	68.20	Peak
2		10333.000	31.77	16.33	48.10	-20.10	68.20	Peak
3		11778.000	30.53	17.92	48.46	-25.54	74.00	Peak
4		12186.000	29.62	17.81	47.44	-26.56	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

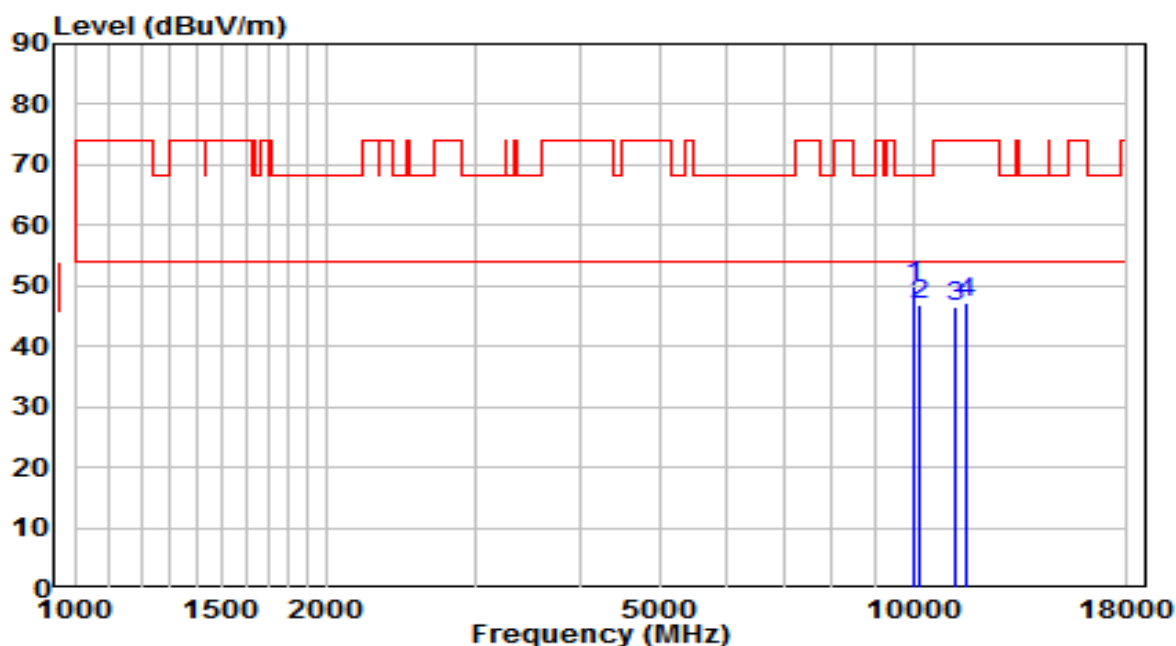


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	34.58	15.26	49.84	-18.36	68.20	Peak
2		10163.000	31.22	15.78	47.01	-21.19	68.20	Peak
3		11208.500	28.71	17.78	46.49	-27.51	74.00	Peak
4		11548.500	29.14	18.03	47.17	-26.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5720MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

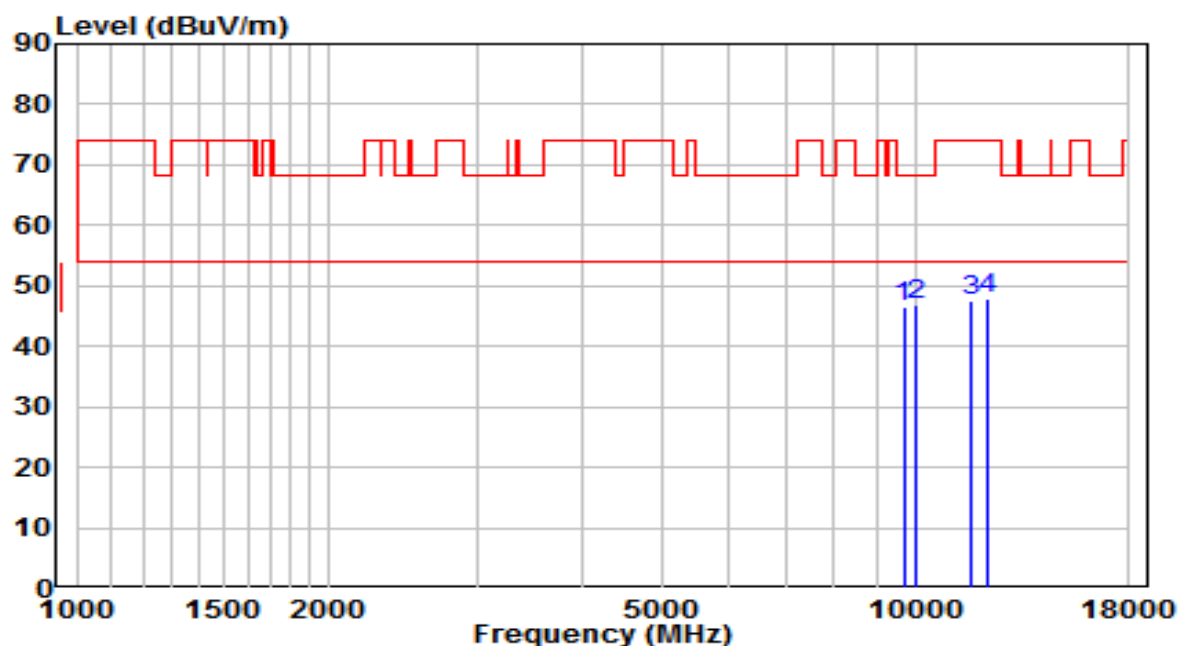


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9687.000	32.21	14.23	46.44	-21.76	68.20	Peak
2	* 10001.500	31.58	15.26	46.84	-21.36	68.20	Peak
3	11650.500	29.49	17.98	47.47	-26.53	74.00	Peak
4	12203.000	30.10	17.81	47.91	-26.09	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5720MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

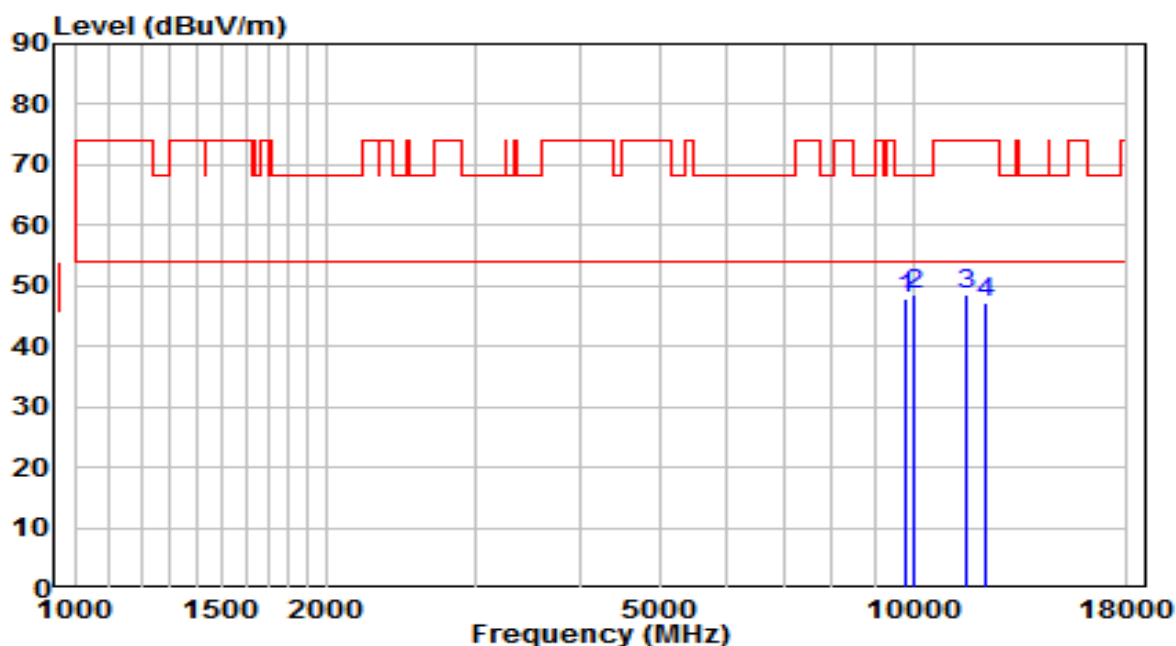


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9823.000	33.37	14.68	48.05	-20.15	68.20	Peak
2	* 10001.500	33.22	15.26	48.49	-19.71	68.20	Peak
3	11557.000	30.53	18.02	48.56	-25.45	74.00	Peak
4	12228.500	29.37	17.81	47.18	-26.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

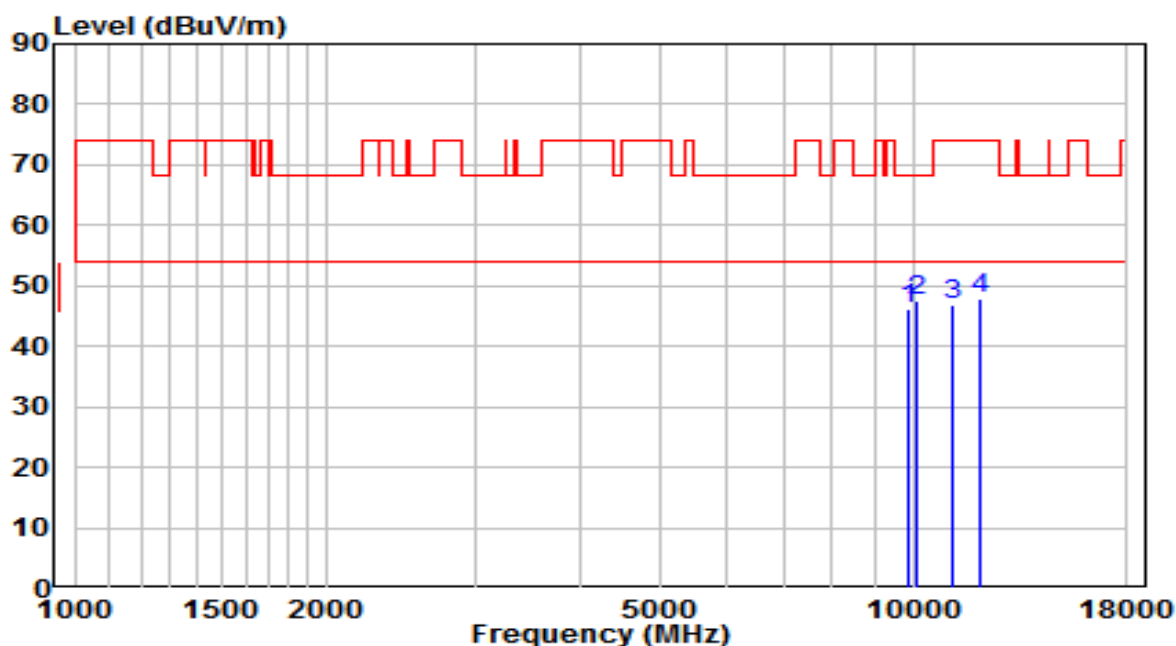


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9857.000	31.47	14.79	46.26	-21.94	68.20	Peak
2	* 10120.500	32.06	15.65	47.71	-20.49	68.20	Peak
3	11166.000	29.02	17.74	46.75	-27.25	74.00	Peak
4	12007.500	29.94	17.82	47.76	-26.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

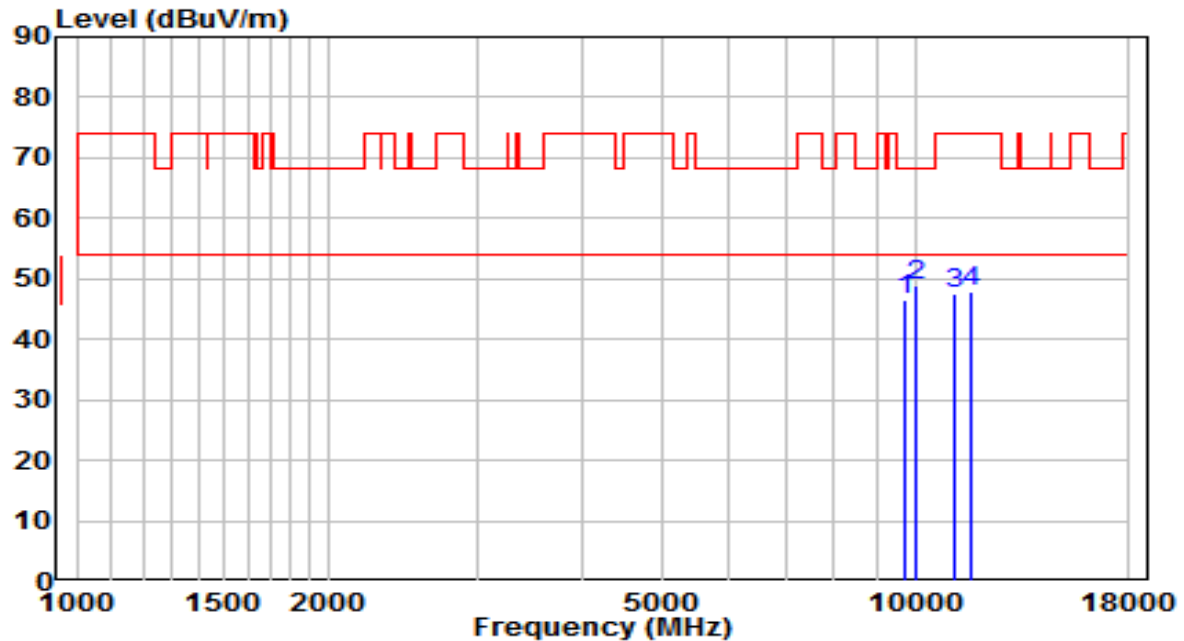


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9695.500	32.17	14.26	46.43	-21.77	68.20	Peak
2	* 10001.500	33.64	15.26	48.91	-19.29	68.20	Peak
3	11132.000	29.74	17.70	47.45	-26.55	74.00	Peak
4	11659.000	30.06	17.98	48.04	-25.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5785MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

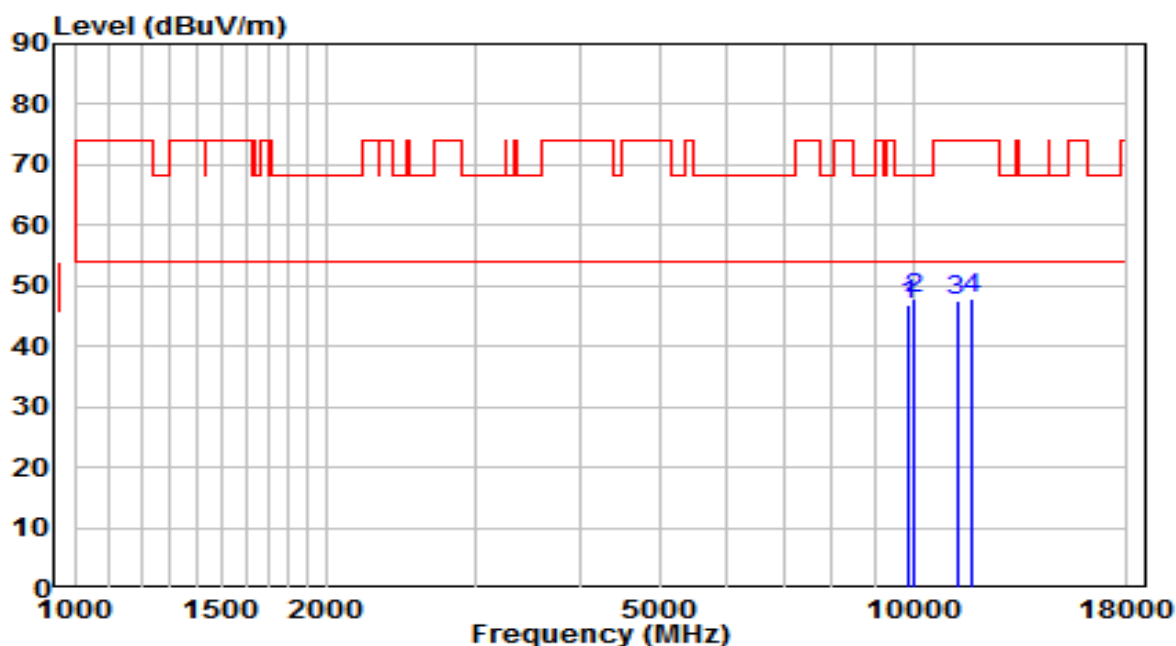


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9899.500	32.08	14.93	47.01	-21.19	68.20	Peak
2	* 10001.500	32.55	15.26	47.81	-20.39	68.20	Peak
3	11268.000	29.61	17.83	47.44	-26.56	74.00	Peak
4	11727.000	29.90	17.95	47.84	-26.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5785MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

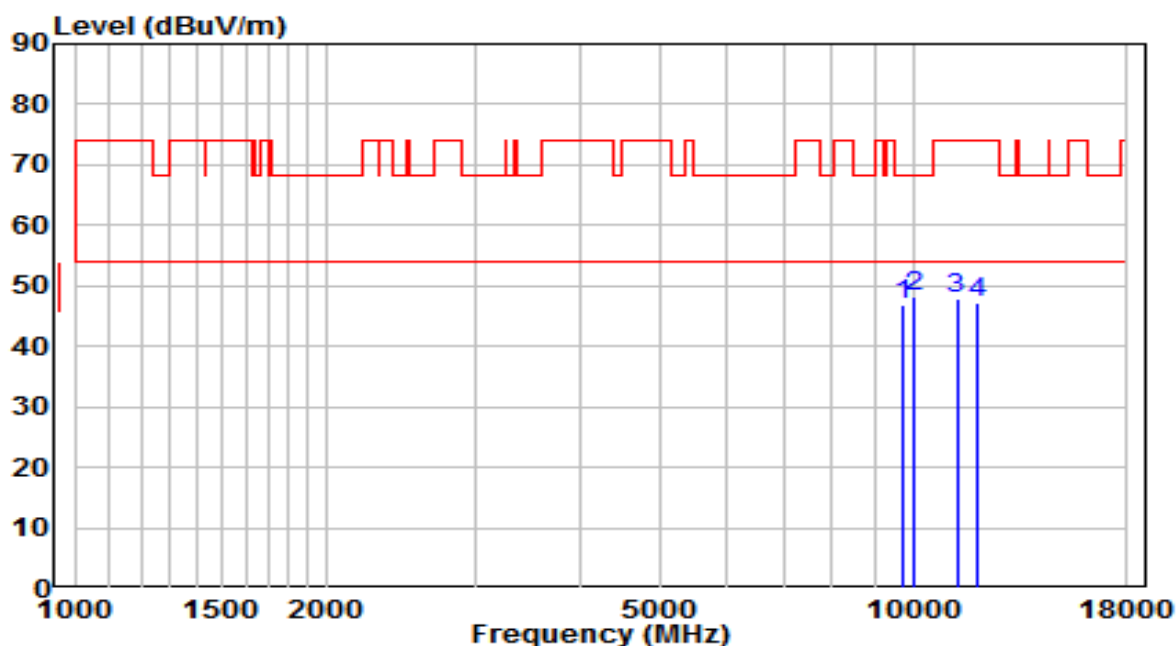


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.42	14.35	46.76	-21.44	68.20	Peak
2	* 10001.500	33.08	15.26	48.35	-19.85	68.20	Peak
3	11268.000	29.92	17.83	47.75	-26.25	74.00	Peak
4	11939.500	29.41	17.85	47.25	-26.75	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

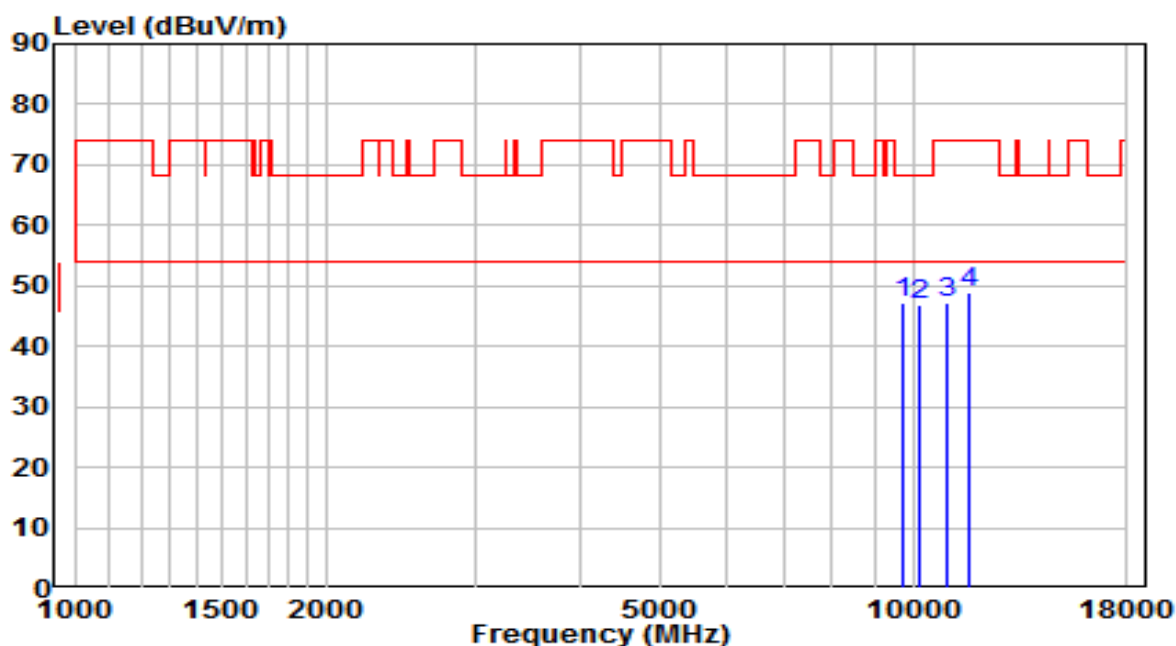


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9729.500	32.67	14.37	47.04	-21.16	68.20	Peak
2		10163.000	31.13	15.78	46.92	-21.28	68.20	Peak
3		11004.500	29.60	17.58	47.18	-26.82	74.00	Peak
4		11659.000	30.77	17.98	48.75	-25.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11a at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

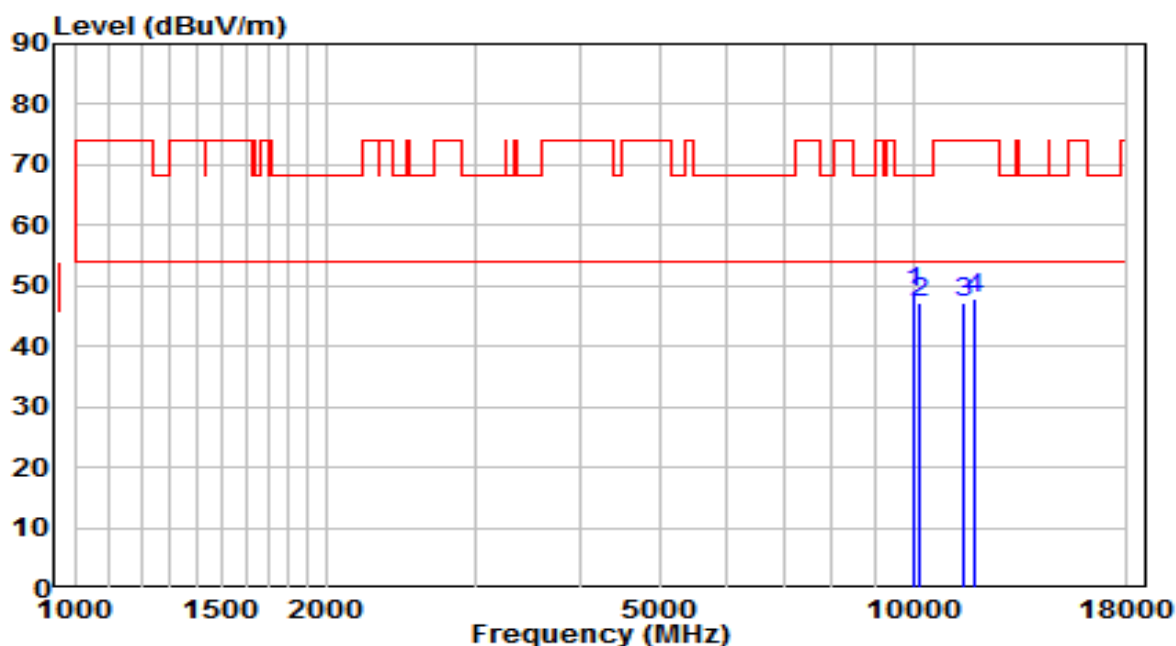


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.80	15.26	49.06	-19.14	68.20	Peak
2		10163.000	31.26	15.78	47.04	-21.16	68.20	Peak
3		11463.500	29.21	18.02	47.23	-26.77	74.00	Peak
4		11820.500	29.87	17.90	47.77	-26.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

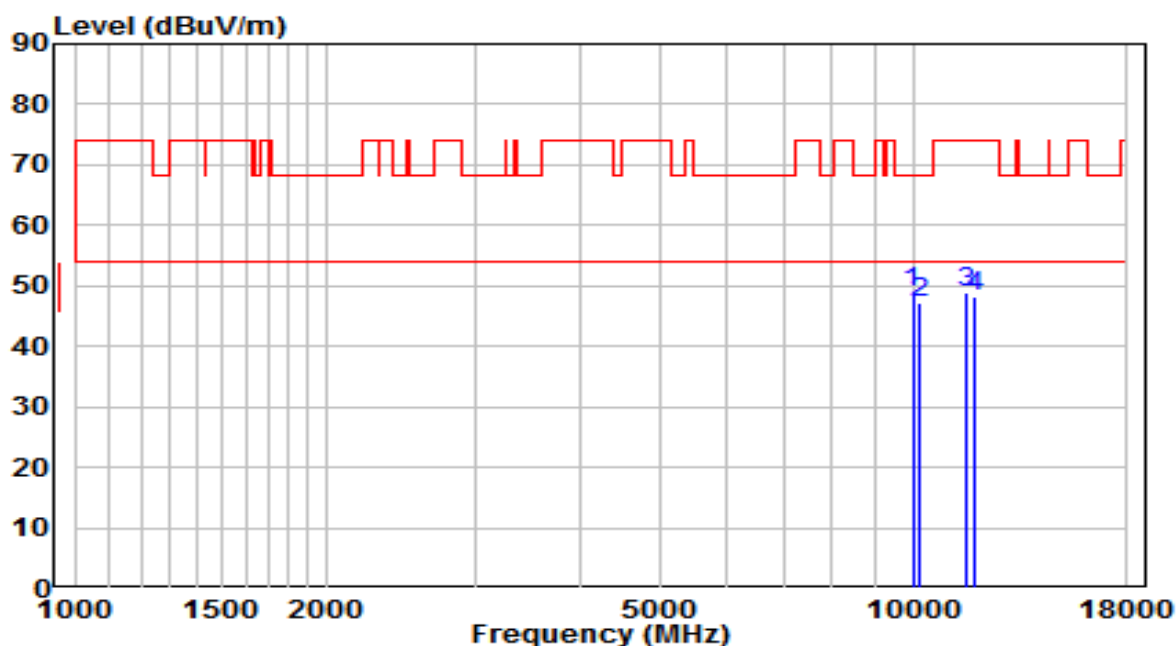


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9984.500	33.57	15.21	48.78	-19.42	68.20	Peak
2		10163.000	31.27	15.78	47.06	-21.14	68.20	Peak
3		11599.500	30.74	18.00	48.74	-25.26	74.00	Peak
4		11846.000	30.36	17.89	48.25	-25.75	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

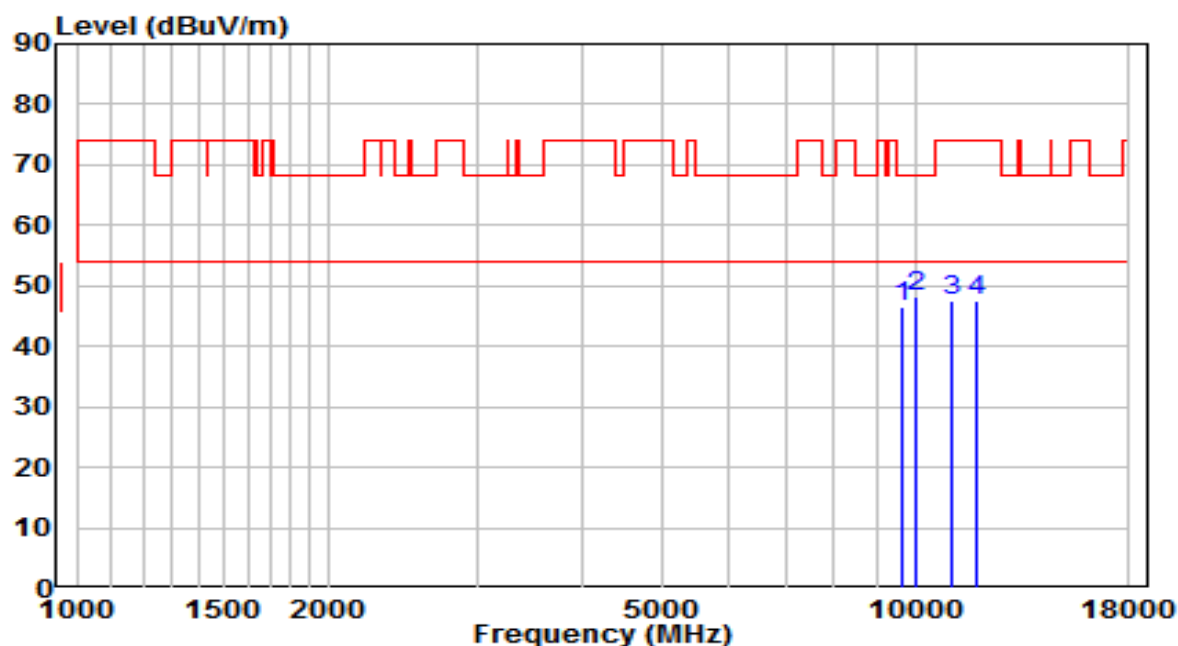


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	32.51	14.07	46.58	-21.62	68.20	Peak
2	* 10001.500	33.11	15.26	48.37	-19.83	68.20	Peak
3	11021.500	29.92	17.60	47.52	-26.48	74.00	Peak
4	11837.500	29.81	17.89	47.70	-26.30	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

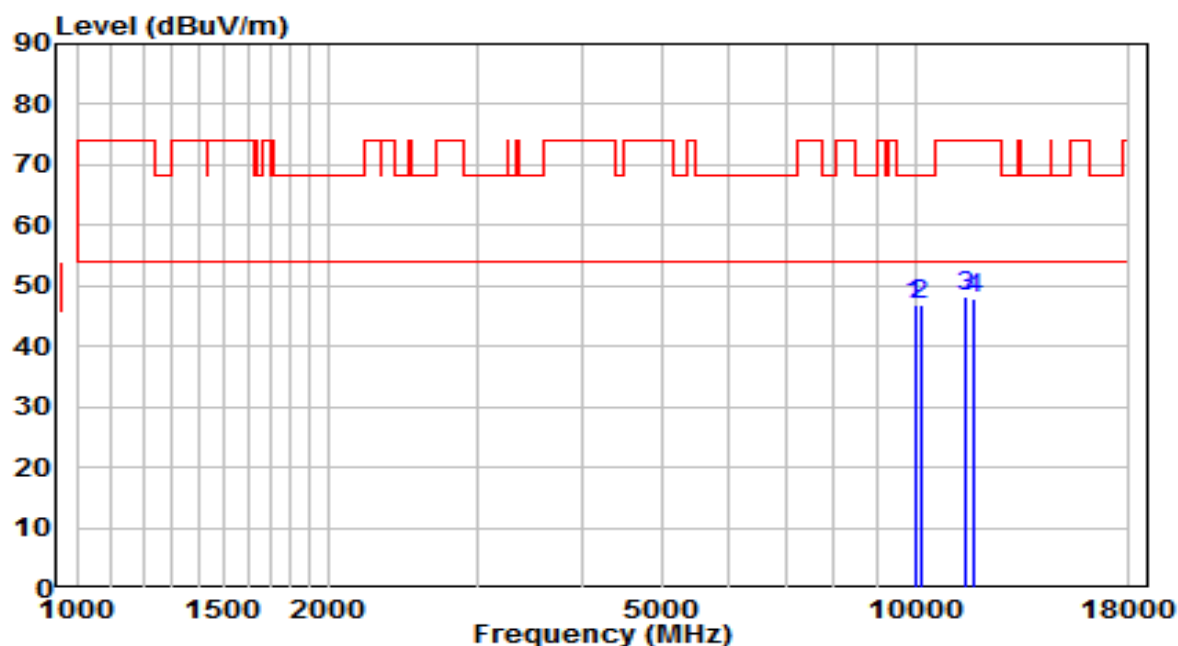


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9984.500	31.68	15.21	46.89	-21.31	68.20	Peak
2	* 10137.500	31.32	15.70	47.02	-21.18	68.20	Peak
3	11489.000	30.04	18.04	48.08	-25.92	74.00	Peak
4	11761.000	30.13	17.93	48.06	-25.94	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

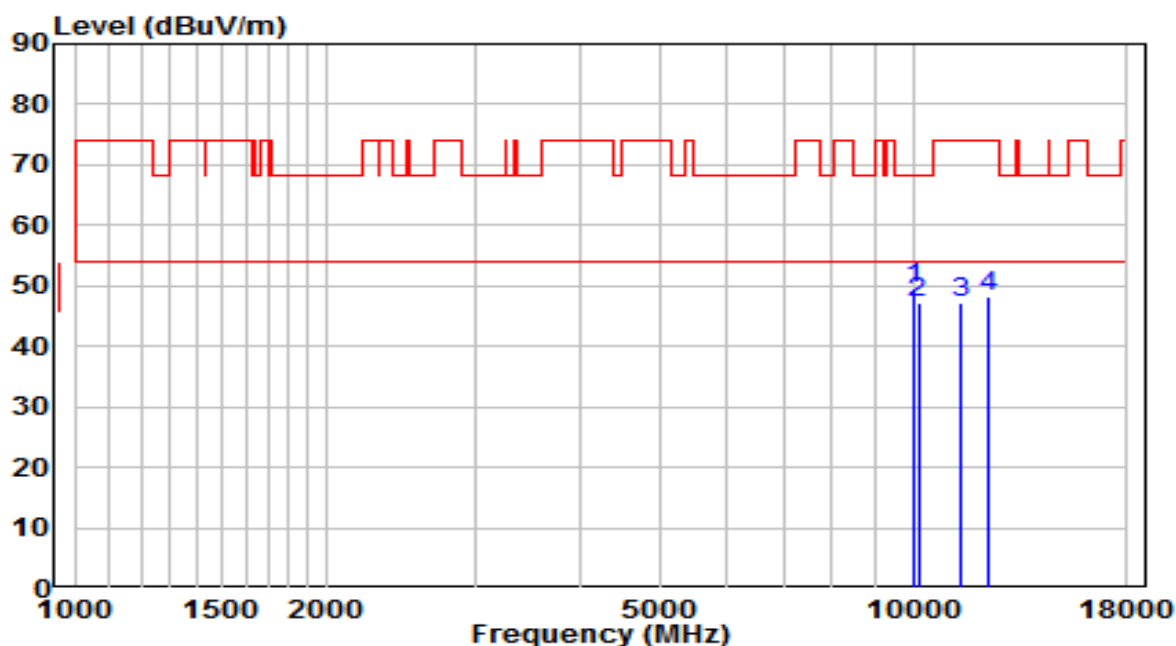


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	34.21	15.26	49.48	-18.72	68.20	Peak
2		10137.500	31.56	15.70	47.26	-20.94	68.20	Peak
3		11404.000	29.18	17.96	47.14	-26.86	74.00	Peak
4		12262.500	30.32	17.81	48.13	-25.87	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

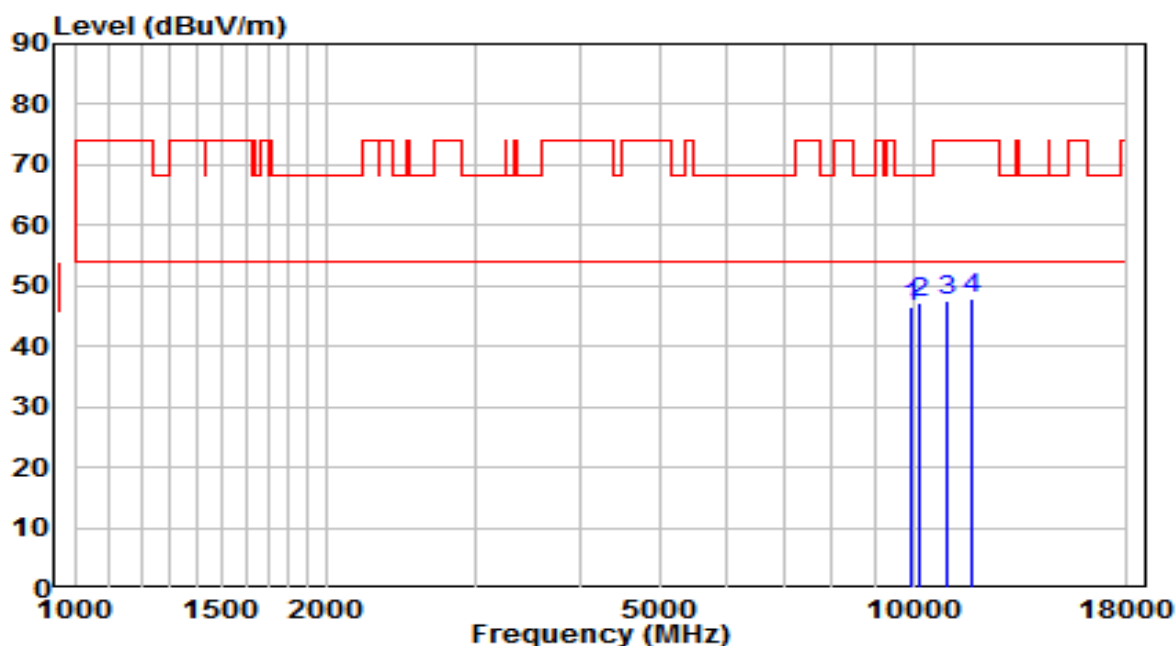


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9942.000	31.59	15.07	46.66	-21.54	68.20	Peak
2	* 10154.500	31.59	15.76	47.35	-20.85	68.20	Peak
3	10987.500	30.08	17.56	47.64	-26.36	74.00	Peak
4	11727.000	29.95	17.95	47.89	-26.11	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

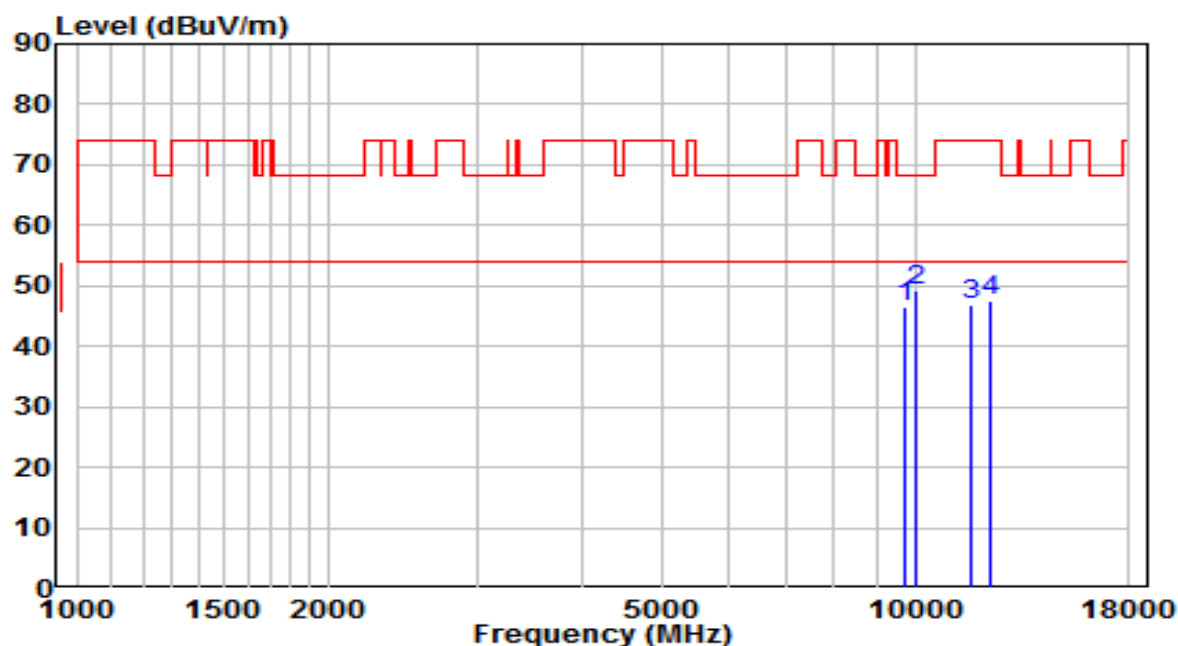


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9704.000	32.24	14.29	46.52	-21.68	68.20	Peak
2	* 10001.500	33.93	15.26	49.19	-19.01	68.20	Peak
3	11642.000	28.94	17.98	46.92	-27.08	74.00	Peak
4	12288.000	29.66	17.81	47.47	-26.53	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

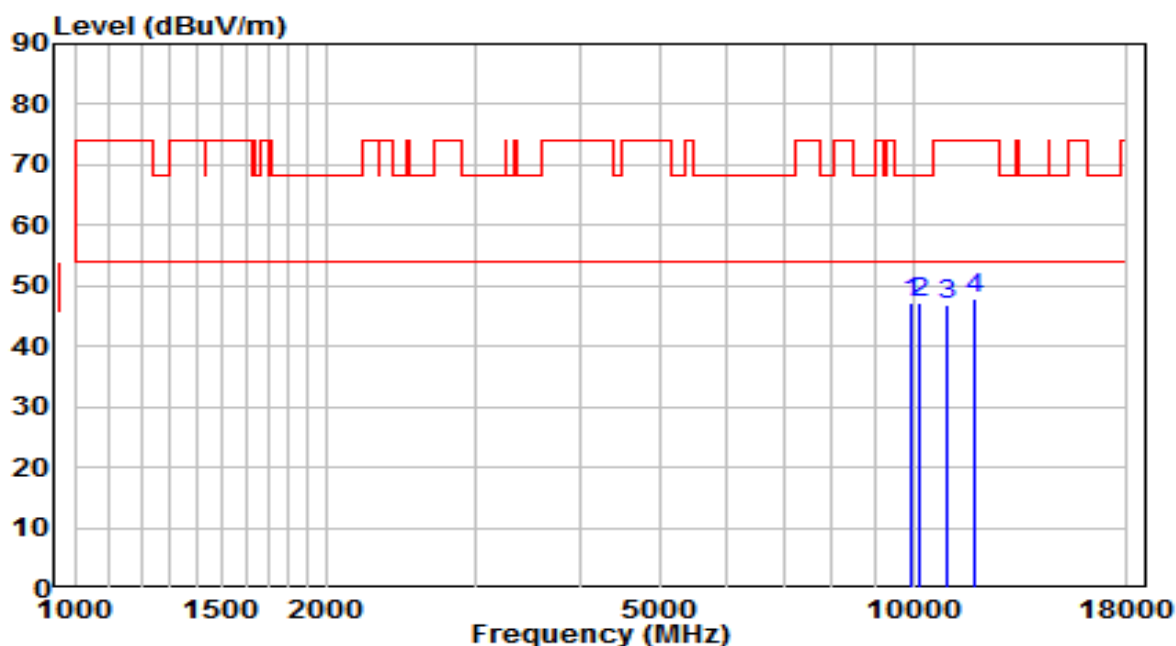


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9967.500	31.96	15.15	47.12	-21.08	68.20	Peak
2	* 10171.500	31.38	15.81	47.19	-21.01	68.20	Peak
3	10970.500	29.48	17.54	47.02	-26.98	74.00	Peak
4	11829.000	29.83	17.90	47.73	-26.27	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

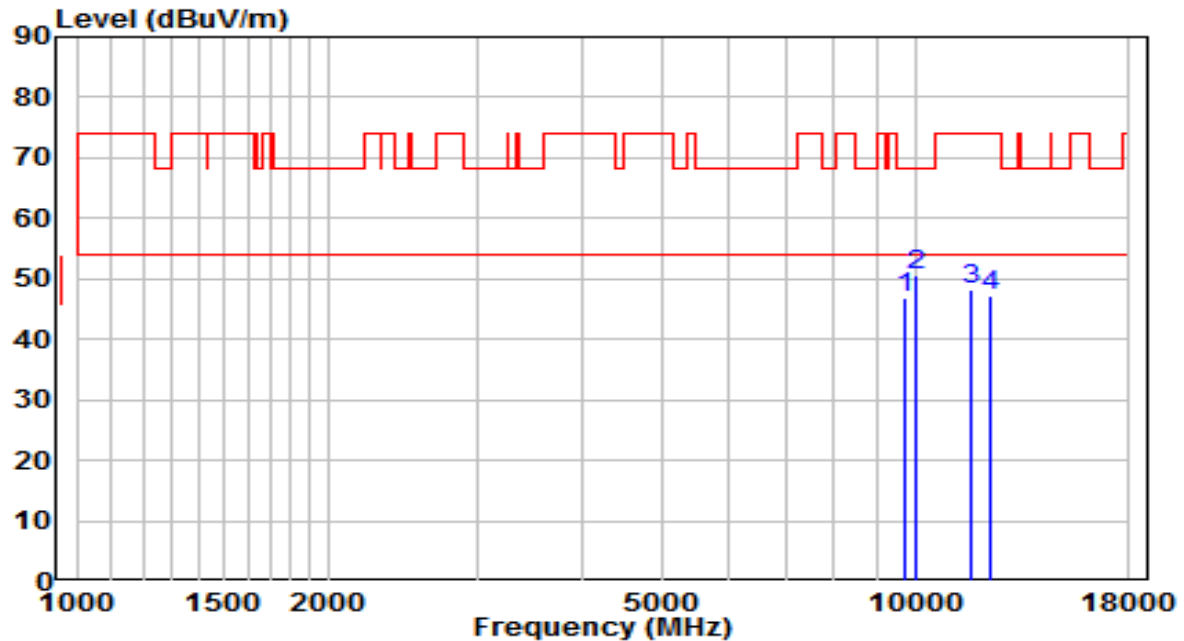


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.53	14.35	46.88	-21.32	68.20	Peak
2	* 10001.500	35.23	15.26	50.49	-17.71	68.20	Peak
3	11659.000	30.33	17.98	48.31	-25.69	74.00	Peak
4	12279.500	29.46	17.81	47.27	-26.73	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

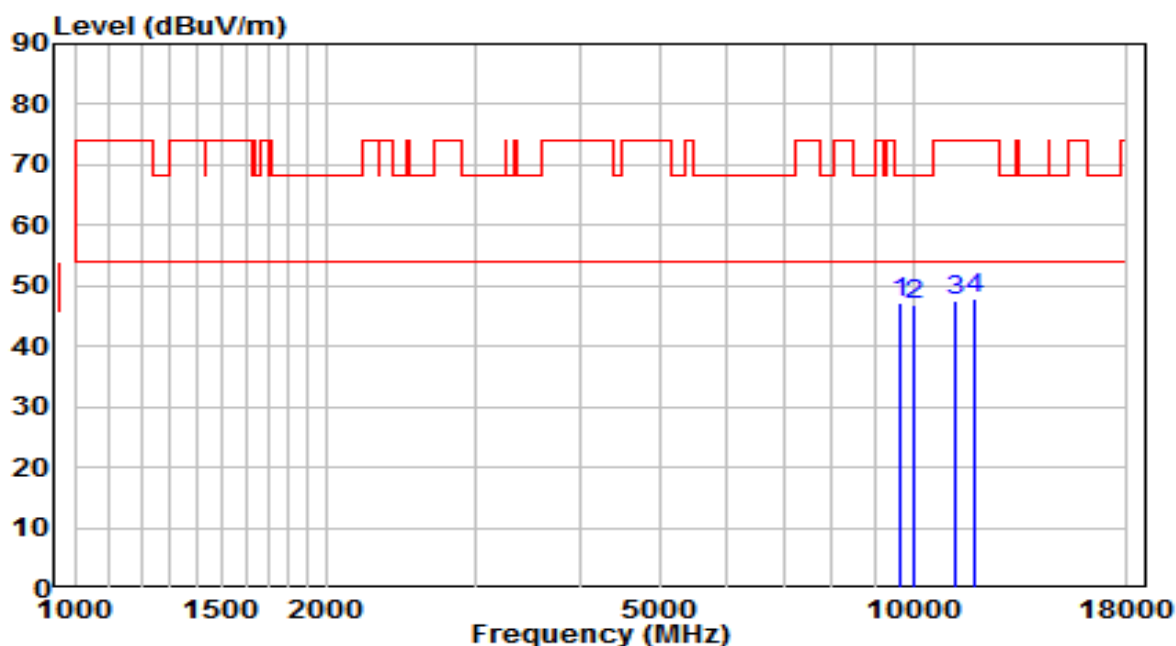


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9627.500	33.31	14.04	47.35	-20.85	68.20	Peak
2		9993.000	31.79	15.24	47.03	-21.17	68.20	Peak
3		11208.500	29.64	17.78	47.42	-26.58	74.00	Peak
4		11837.500	29.96	17.89	47.85	-26.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

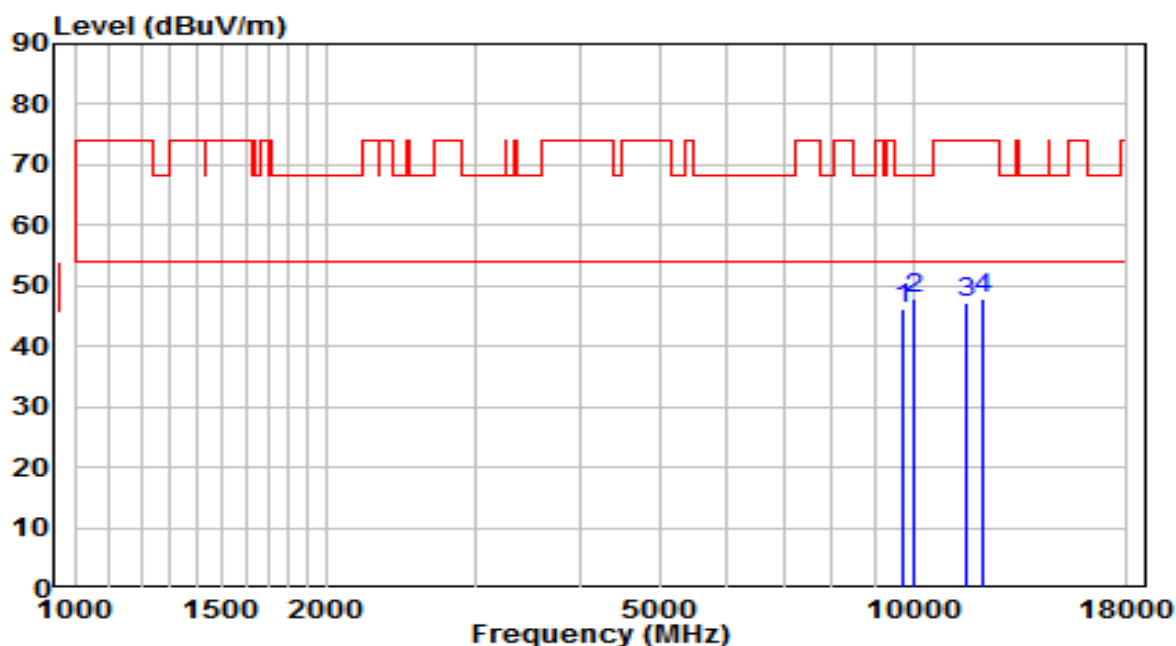


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9712.500	31.94	14.32	46.26	-21.94	68.20	Peak
2	* 10001.500	32.56	15.26	47.83	-20.37	68.20	Peak
3	11591.000	29.28	18.01	47.29	-26.71	74.00	Peak
4	12092.500	30.04	17.82	47.86	-26.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

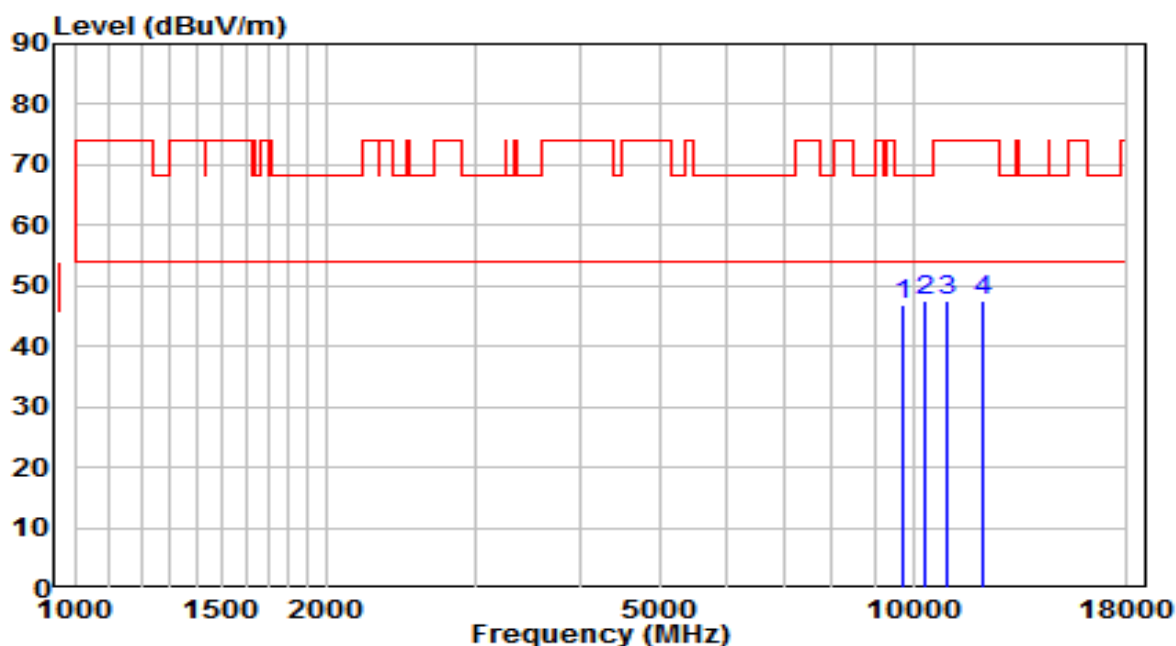


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.39	14.35	46.74	-21.46	68.20	Peak
2	* 10341.500	31.30	16.36	47.66	-20.54	68.20	Peak
3	10970.500	30.04	17.54	47.58	-26.42	74.00	Peak
4	12126.500	29.89	17.82	47.71	-26.29	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

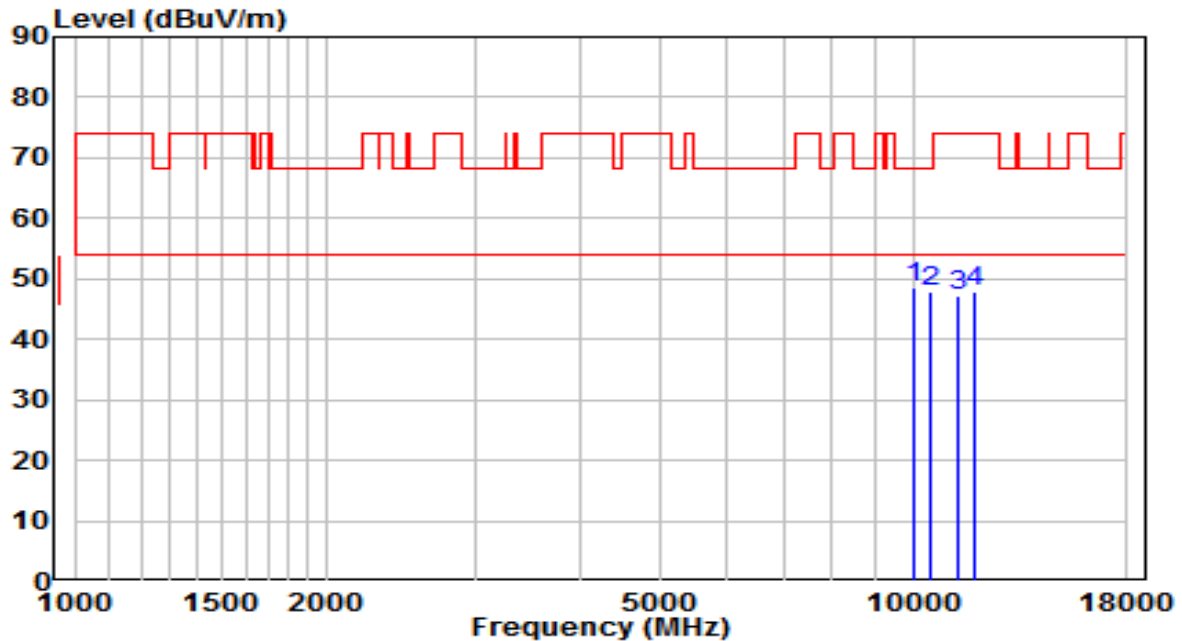


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.42	15.26	48.68	-19.52	68.20	Peak
2		10452.000	31.23	16.72	47.95	-20.25	68.20	Peak
3		11276.500	29.47	17.84	47.31	-26.69	74.00	Peak
4		11880.000	29.92	17.88	47.79	-26.21	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5720MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

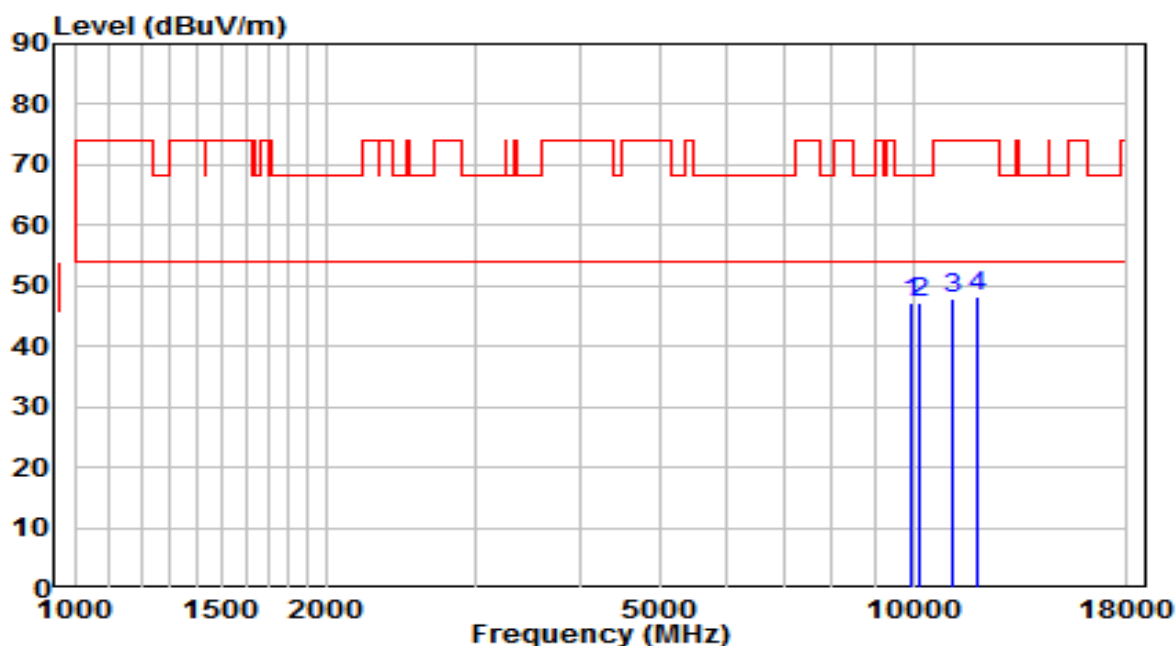


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9976.000	31.94	15.18	47.12	-21.08	68.20	Peak
2	* 10163.000	31.59	15.78	47.37	-20.83	68.20	Peak
3	11174.500	30.23	17.74	47.97	-26.03	74.00	Peak
4	11888.500	30.34	17.87	48.21	-25.79	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5720MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

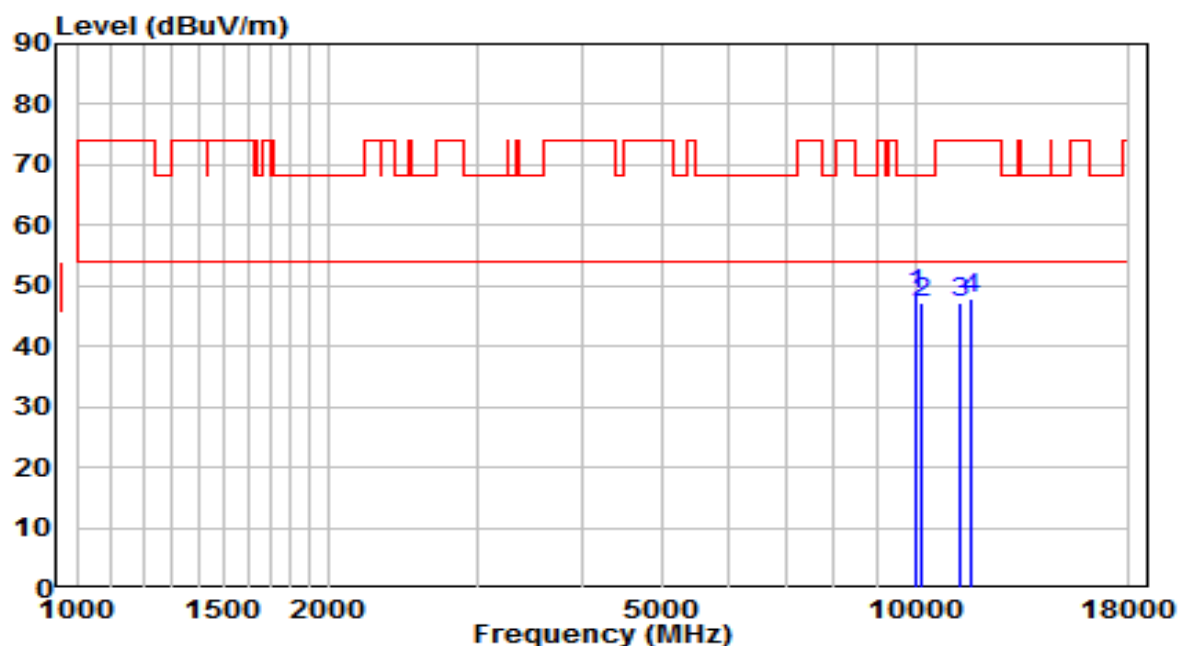


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.39	15.26	48.65	-19.55	68.20	Peak
2		10171.500	31.55	15.81	47.37	-20.83	68.20	Peak
3		11302.000	29.49	17.86	47.35	-26.65	74.00	Peak
4		11659.000	29.84	17.98	47.82	-26.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

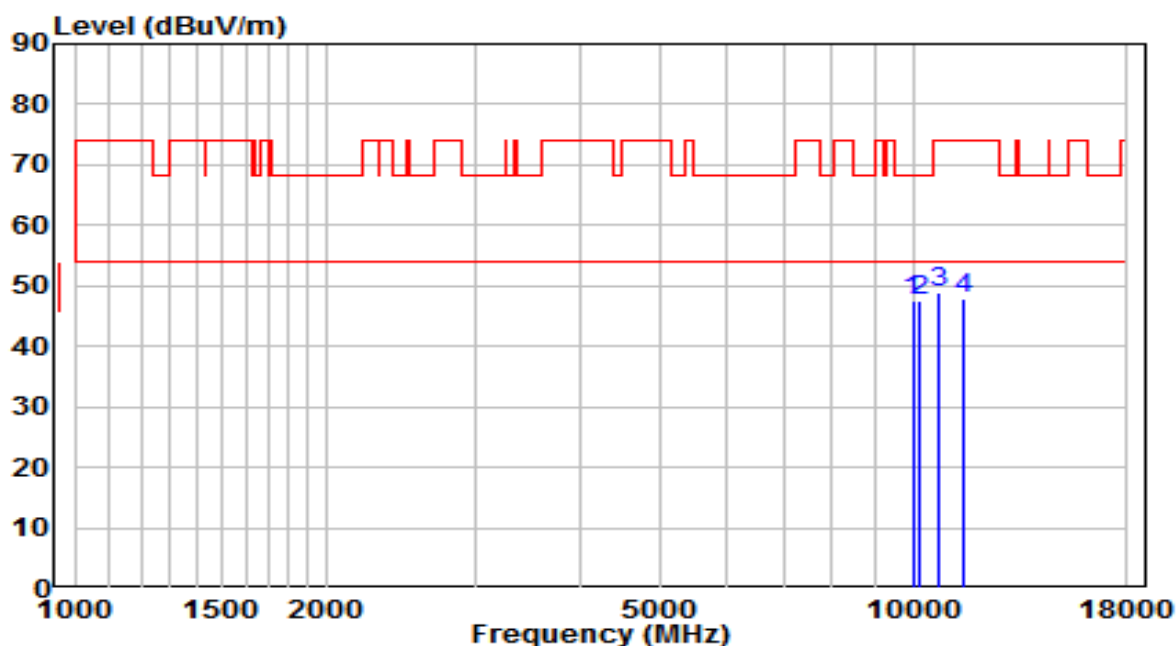


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9984.500	32.34	15.21	47.55	-20.65	68.20	Peak
2	* 10146.000	31.94	15.73	47.67	-20.53	68.20	Peak
3	10732.500	31.61	17.20	48.81	-25.19	74.00	Peak
4	11480.500	30.00	18.03	48.04	-25.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

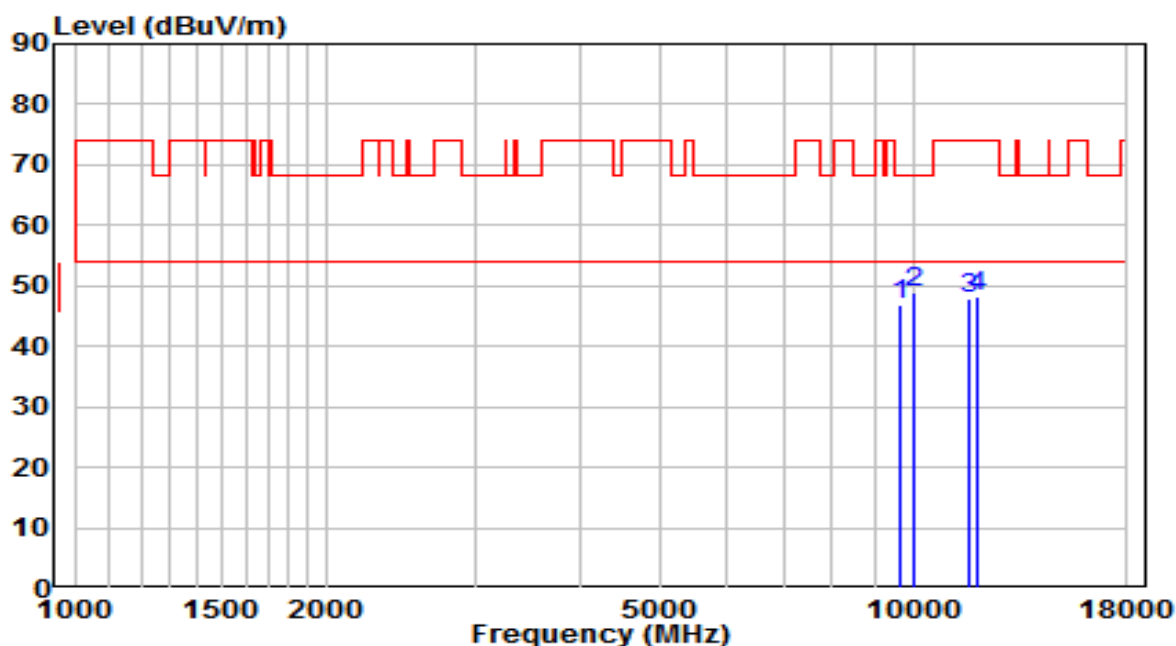


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9670.000	32.64	14.18	46.82	-21.38	68.20	Peak
2	* 10001.500	33.78	15.26	49.04	-19.16	68.20	Peak
3	11659.000	29.86	17.98	47.84	-26.16	74.00	Peak
4	11931.000	30.45	17.85	48.30	-25.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5785MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

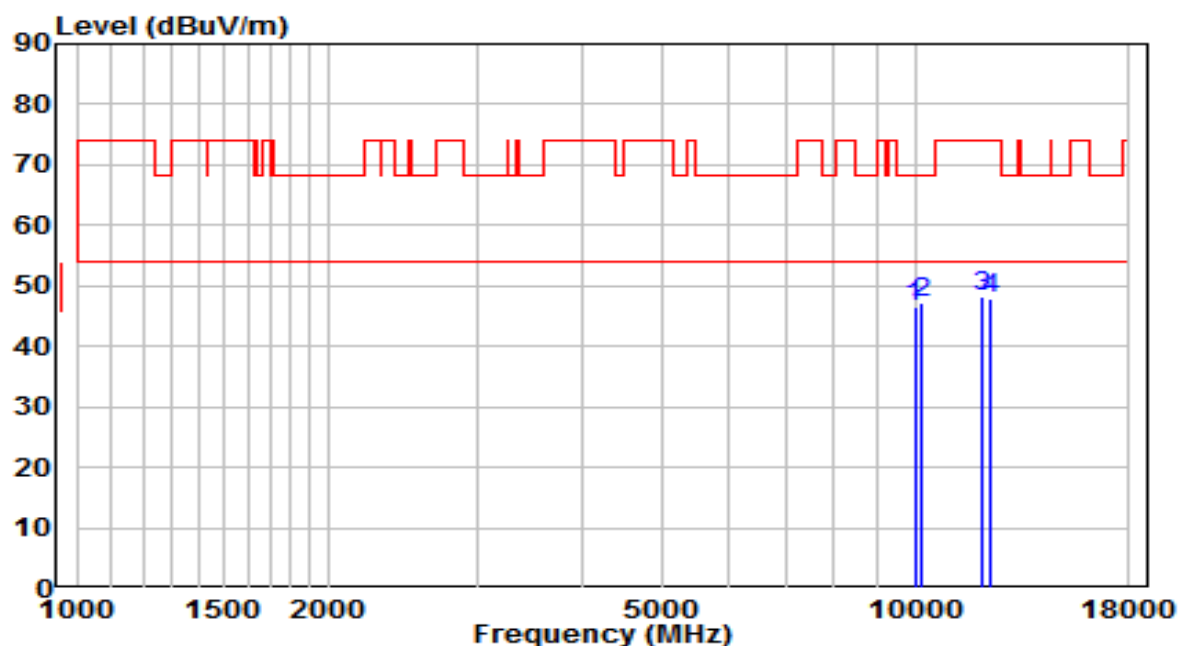


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9984.500	31.38	15.21	46.59	-21.61	68.20	Peak
2	* 10146.000	31.60	15.73	47.33	-20.87	68.20	Peak
3	11999.000	30.57	17.82	48.39	-25.61	74.00	Peak
4	12262.500	30.15	17.81	47.96	-26.04	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5785MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

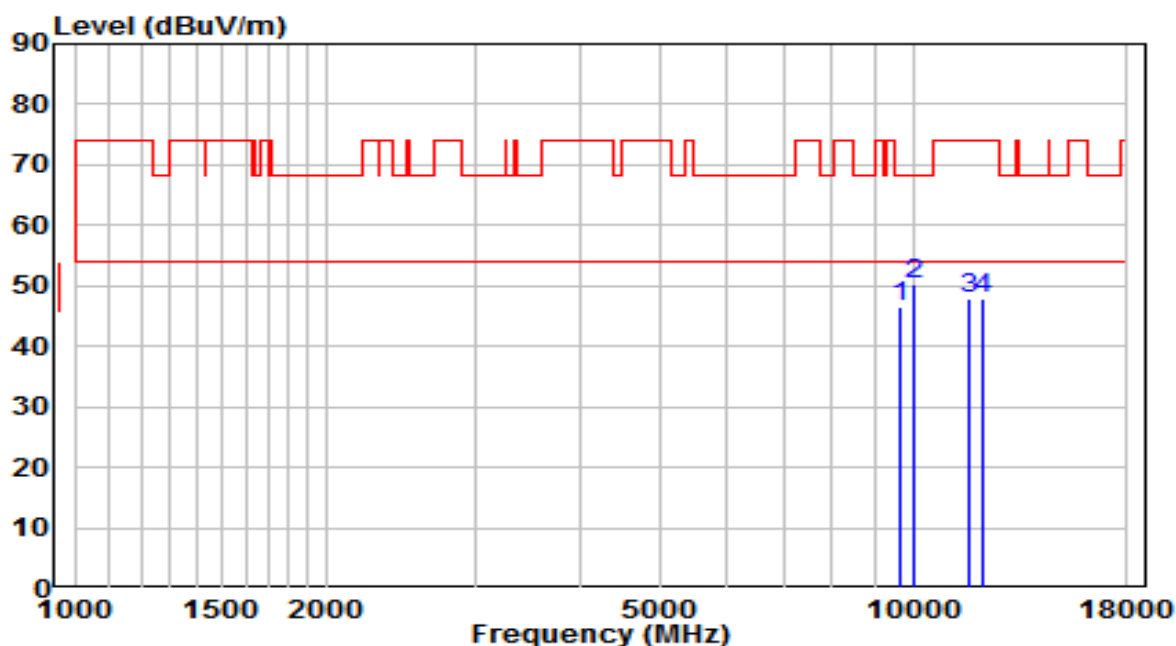


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	32.56	14.07	46.63	-21.57	68.20	Peak
2	* 10001.500	34.87	15.26	50.13	-18.07	68.20	Peak
3	11650.500	29.74	17.98	47.72	-26.28	74.00	Peak
4	12118.000	29.95	17.82	47.77	-26.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

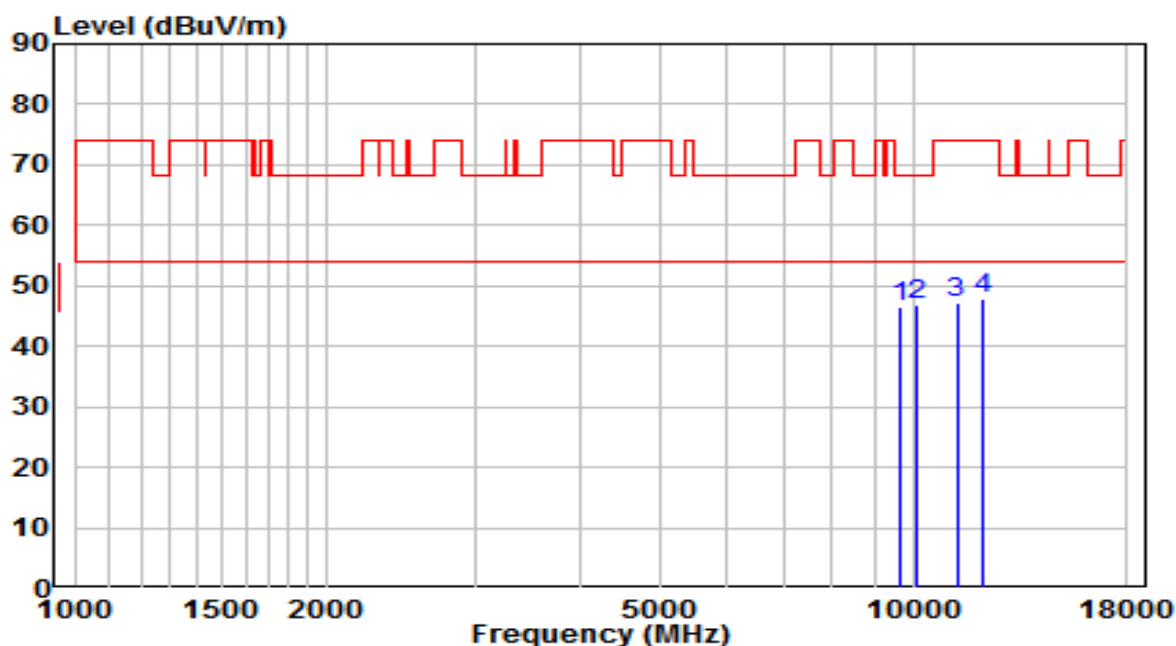


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9627.500	32.64	14.04	46.68	-21.52	68.20	Peak
2	* 10120.500	31.36	15.65	47.00	-21.20	68.20	Peak
3	11268.000	29.42	17.83	47.25	-26.75	74.00	Peak
4	12118.000	30.08	17.82	47.90	-26.10	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

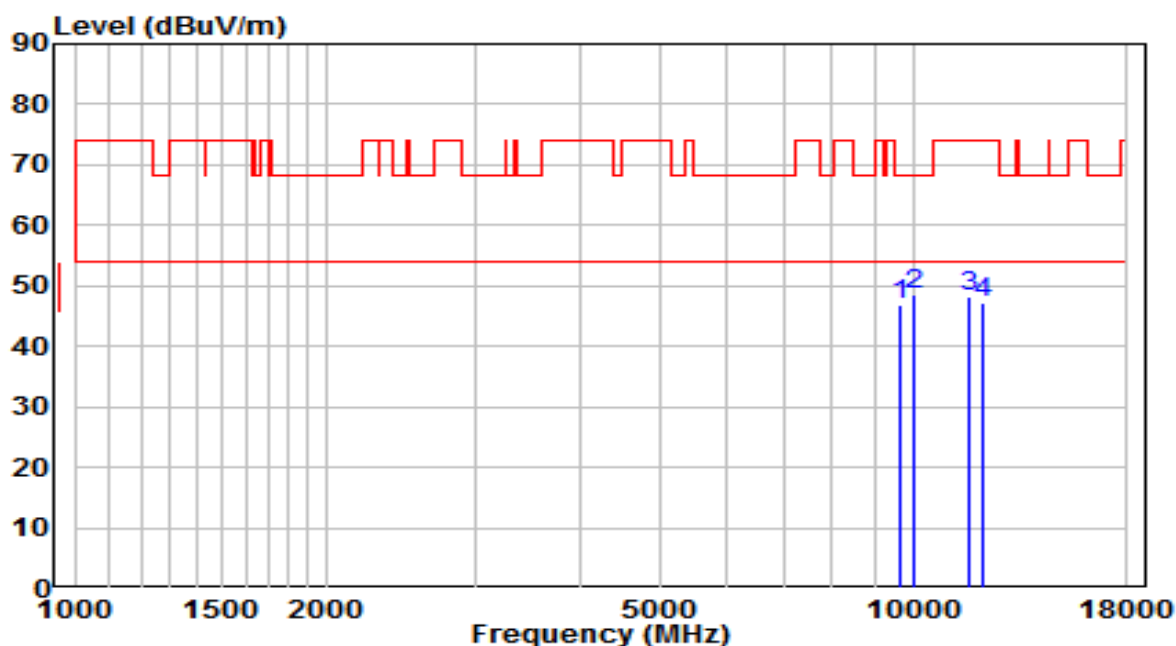


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9678.500	32.76	14.21	46.96	-21.24	68.20	Peak
2	* 10001.500	33.22	15.26	48.49	-19.71	68.20	Peak
3	11650.500	30.13	17.98	48.11	-25.89	74.00	Peak
4	12152.000	29.35	17.82	47.17	-26.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

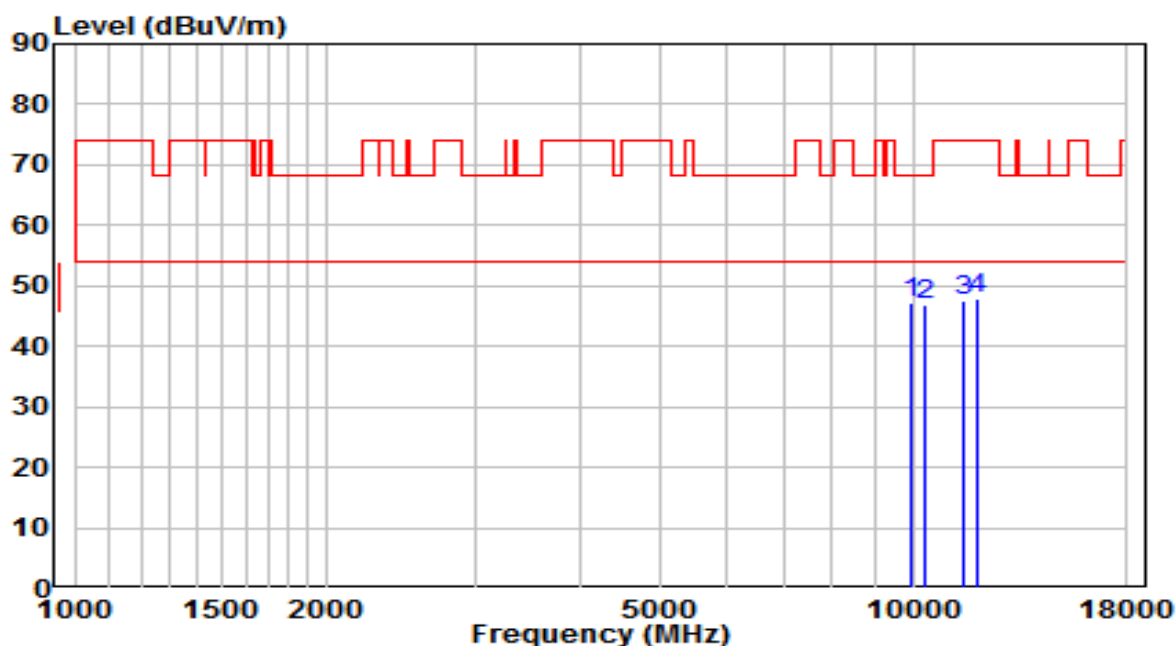


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9933.500	32.00	15.04	47.04	-21.16	68.20	Peak
2		10367.000	30.27	16.44	46.72	-21.48	68.20	Peak
3		11523.000	29.40	18.04	47.44	-26.56	74.00	Peak
4		11888.500	29.99	17.87	47.86	-26.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

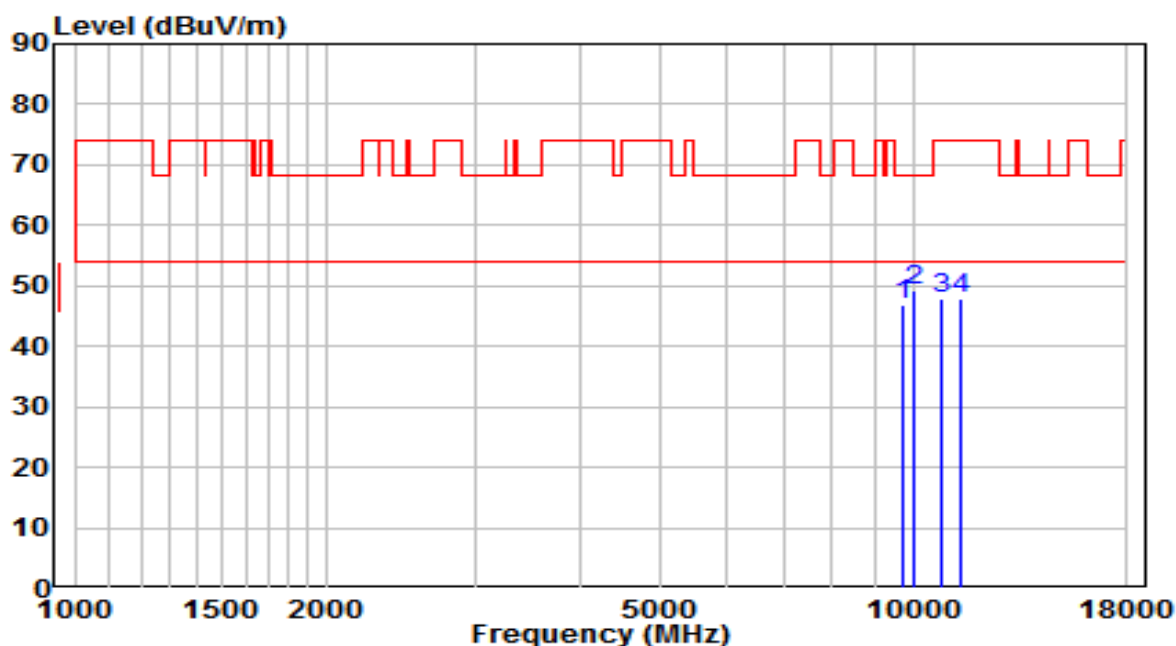


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9695.500	32.58	14.26	46.85	-21.35	68.20	Peak
2	* 10001.500	34.11	15.26	49.38	-18.82	68.20	Peak
3	10783.500	30.76	17.27	48.03	-25.97	74.00	Peak
4	11361.500	29.97	17.92	47.89	-26.11	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

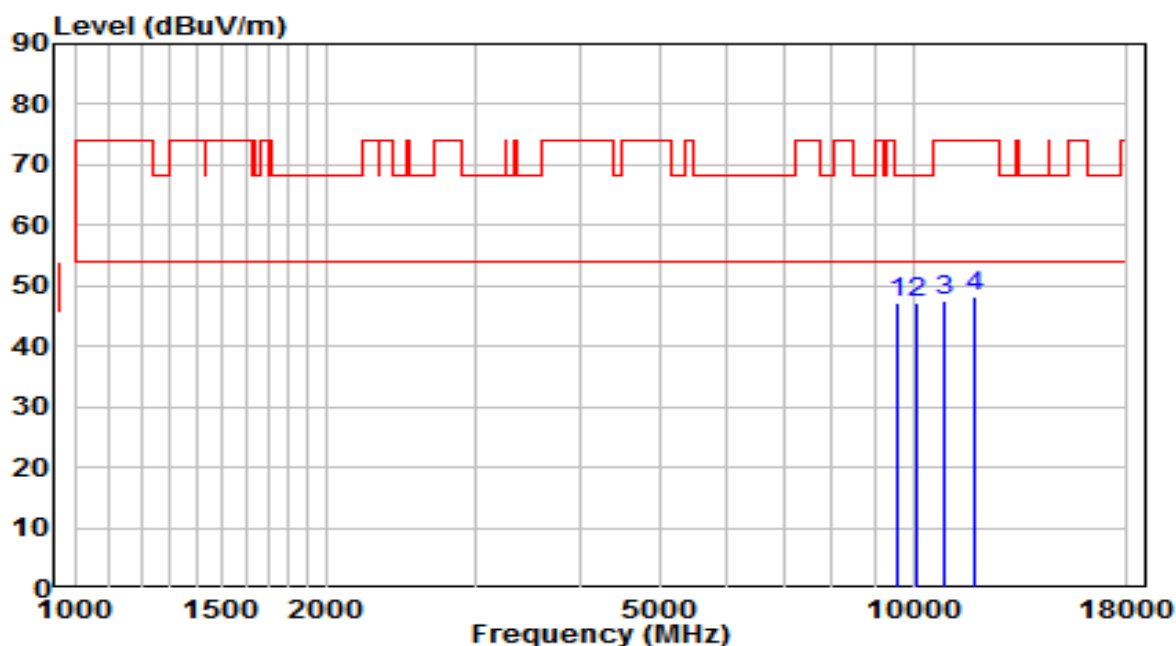


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9585.000	33.33	13.90	47.23	-20.97	68.20	Peak
2		10086.500	31.58	15.54	47.12	-21.08	68.20	Peak
3		10911.000	30.25	17.45	47.70	-26.30	74.00	Peak
4		11820.500	30.42	17.90	48.32	-25.68	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

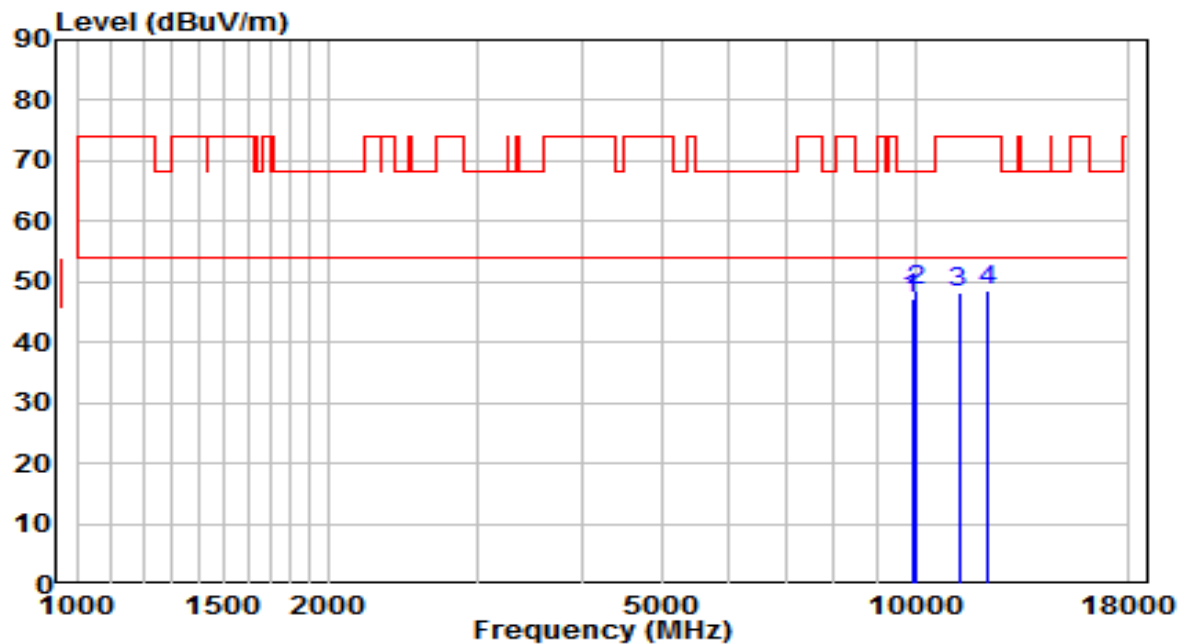


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9908.000	32.34	14.96	47.30	-20.90	68.20	Peak
2	* 10001.500	33.45	15.26	48.72	-19.48	68.20	Peak
3	11268.000	30.34	17.83	48.17	-25.83	74.00	Peak
4	12169.000	30.81	17.82	48.62	-25.38	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

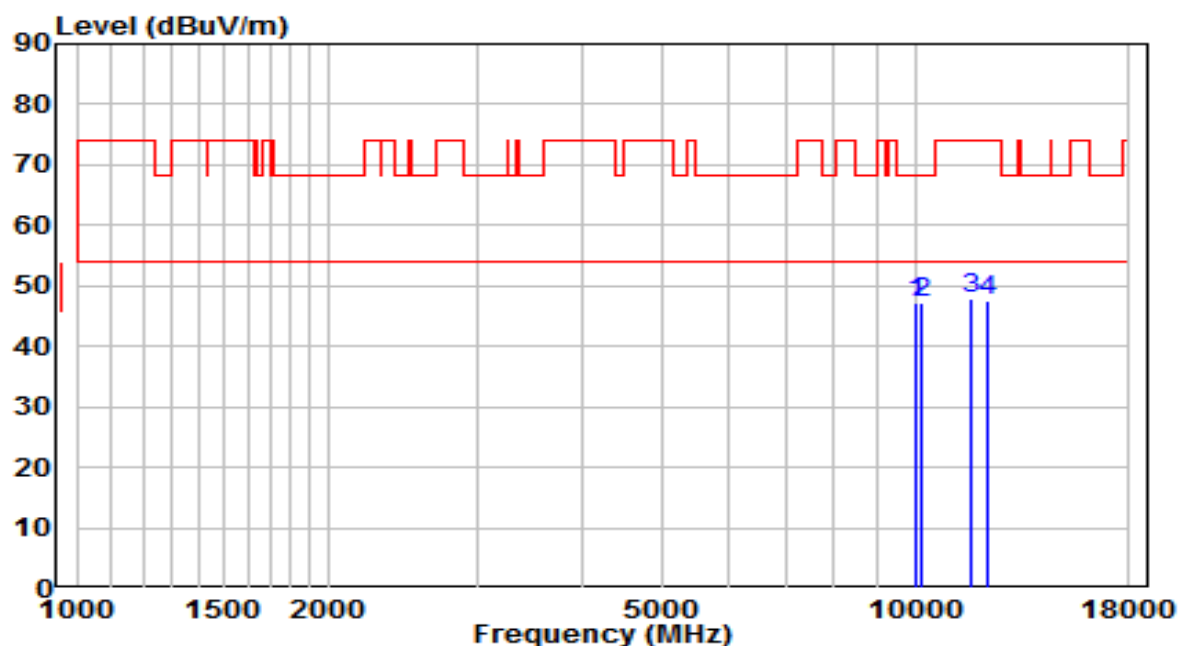


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9993.000	32.08	15.24	47.32	-20.88	68.20	Peak
2		10171.500	31.27	15.81	47.08	-21.12	68.20	Peak
3		11667.500	29.99	17.97	47.96	-26.04	74.00	Peak
4		12186.000	29.79	17.81	47.61	-26.39	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

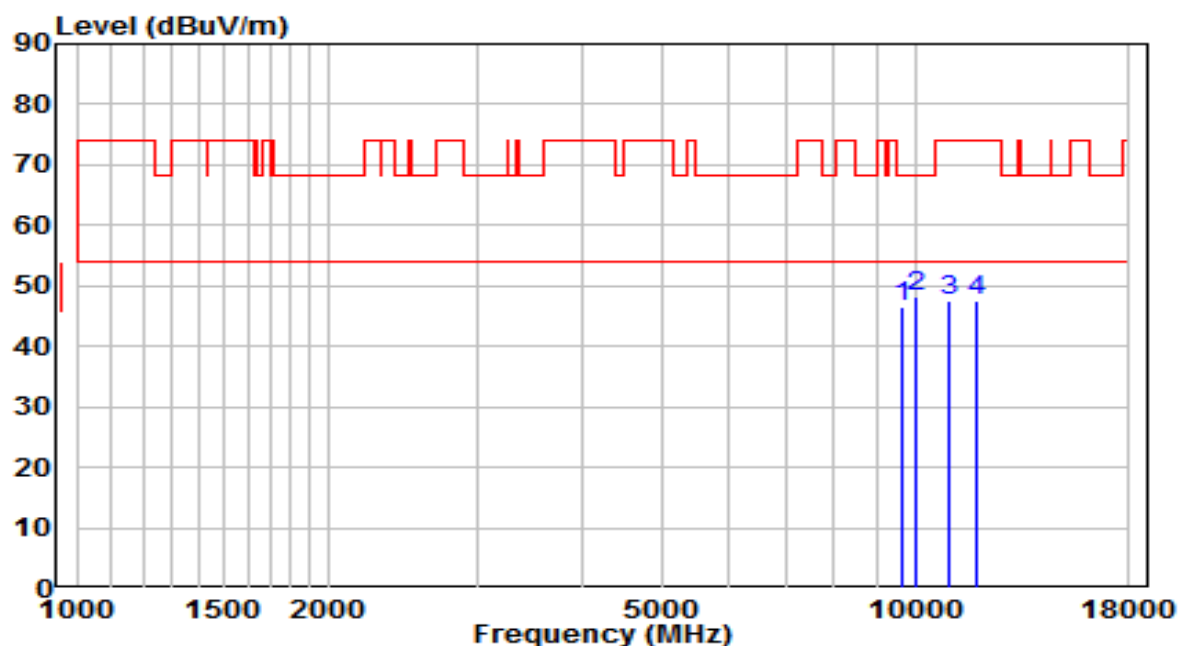


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9627.500	32.56	14.04	46.60	-21.60	68.20	Peak
2	* 10001.500	33.00	15.26	48.26	-19.94	68.20	Peak
3	11013.000	29.84	17.59	47.43	-26.57	74.00	Peak
4	11846.000	29.61	17.89	47.50	-26.50	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5550MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

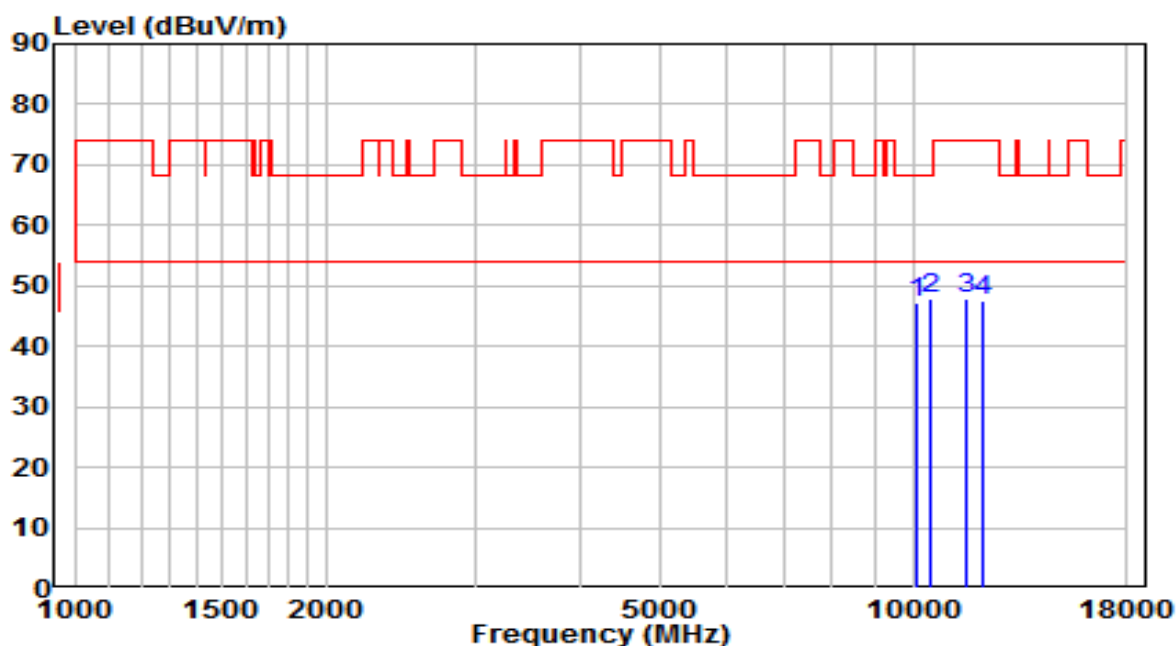


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10078.000	31.55	15.51	47.06	-21.14	68.20	Peak
2	* 10520.000	30.98	16.90	47.88	-20.32	68.20	Peak
3	11540.000	29.97	18.03	48.00	-26.00	74.00	Peak
4	12143.500	29.70	17.82	47.52	-26.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5550MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

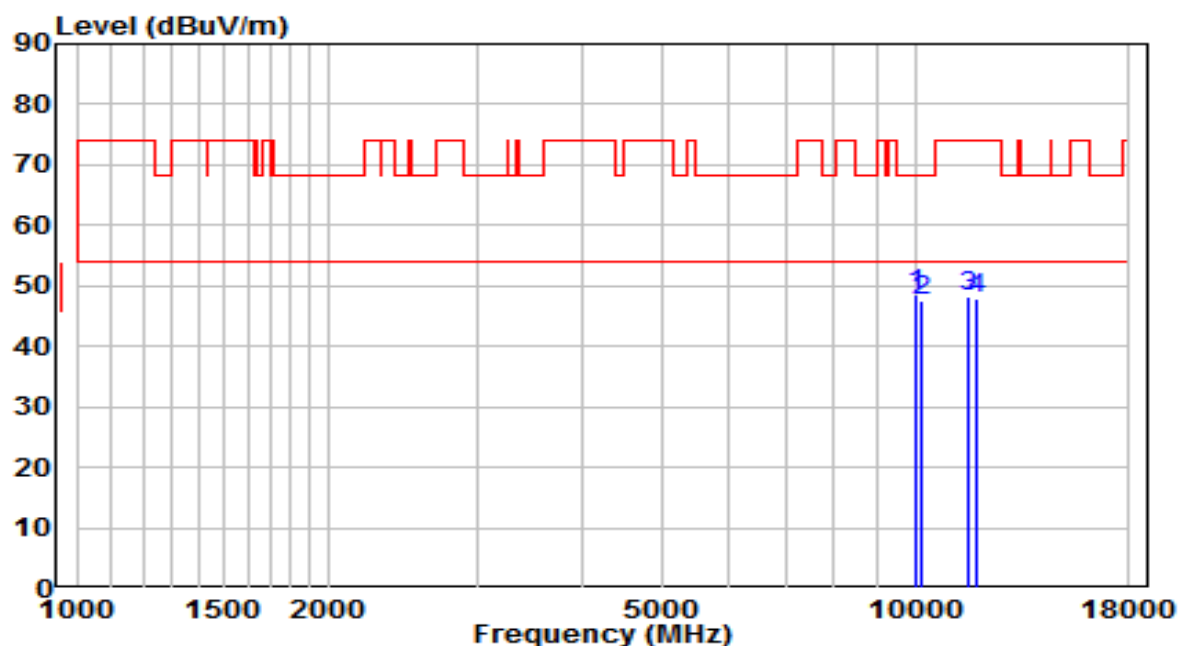


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.33	15.26	48.59	-19.61	68.20	Peak
2		10163.000	31.66	15.78	47.44	-20.76	68.20	Peak
3		11540.000	30.11	18.03	48.15	-25.85	74.00	Peak
4		11829.000	29.86	17.90	47.76	-26.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

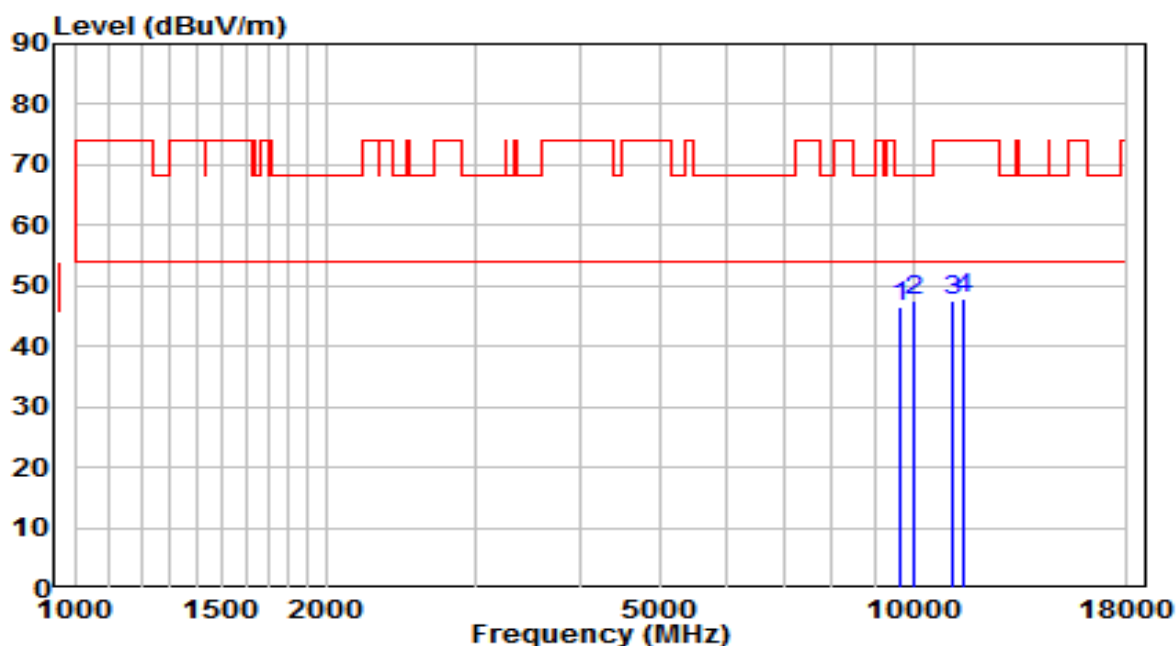


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	32.57	14.07	46.64	-21.56	68.20	Peak
2	* 10001.500	32.27	15.26	47.53	-20.67	68.20	Peak
3	11174.500	29.64	17.74	47.39	-26.61	74.00	Peak
4	11472.000	29.91	18.02	47.94	-26.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

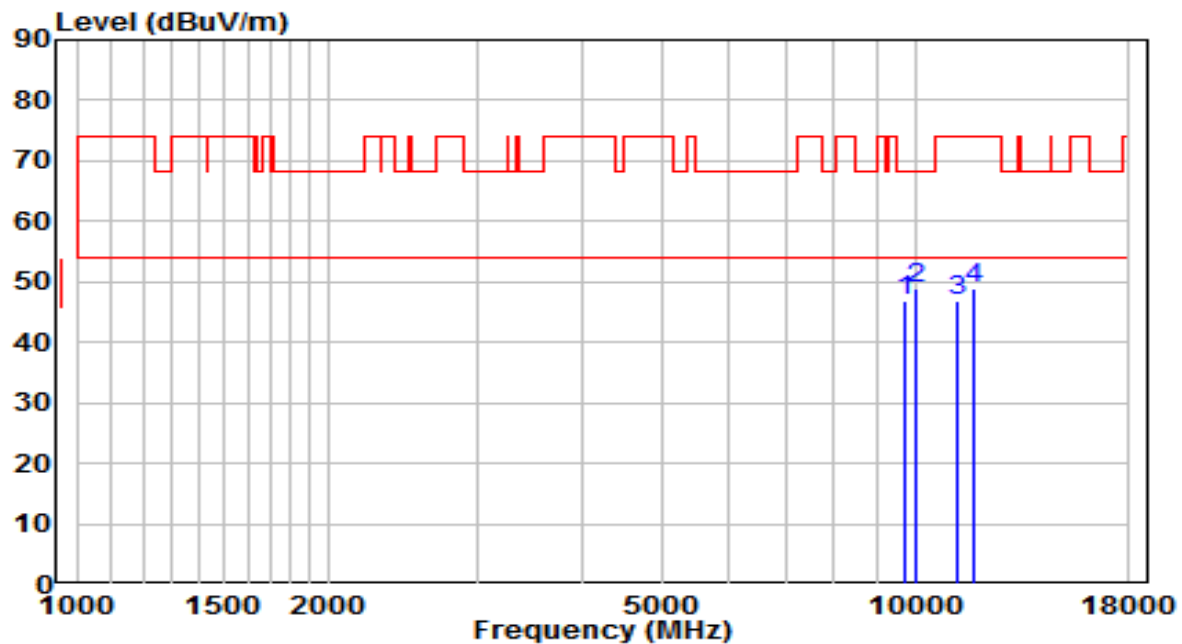


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9704.000	32.50	14.29	46.79	-21.41	68.20	Peak
2	* 10001.500	33.76	15.26	49.03	-19.17	68.20	Peak
3	11191.500	29.20	17.76	46.96	-27.04	74.00	Peak
4	11786.500	31.08	17.92	48.99	-25.01	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5710MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

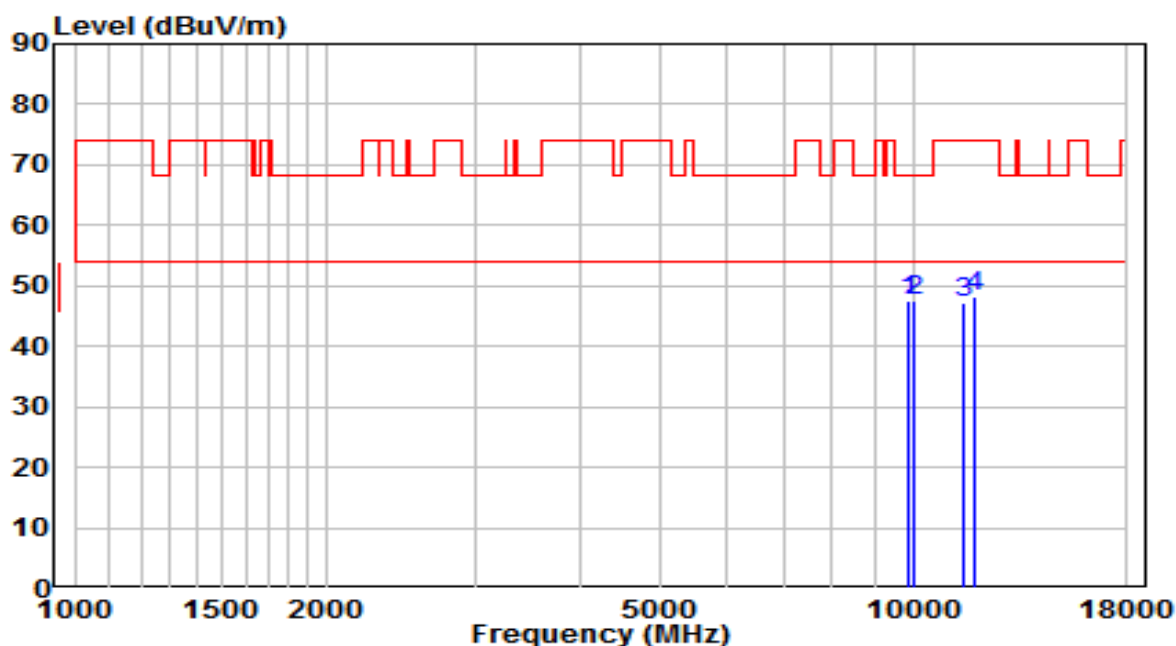


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9882.500	32.74	14.87	47.61	-20.59	68.20	Peak
2		10001.500	32.34	15.26	47.60	-20.60	68.20	Peak
3		11480.500	29.18	18.03	47.21	-26.79	74.00	Peak
4		11829.000	30.31	17.90	48.21	-25.79	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5710MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

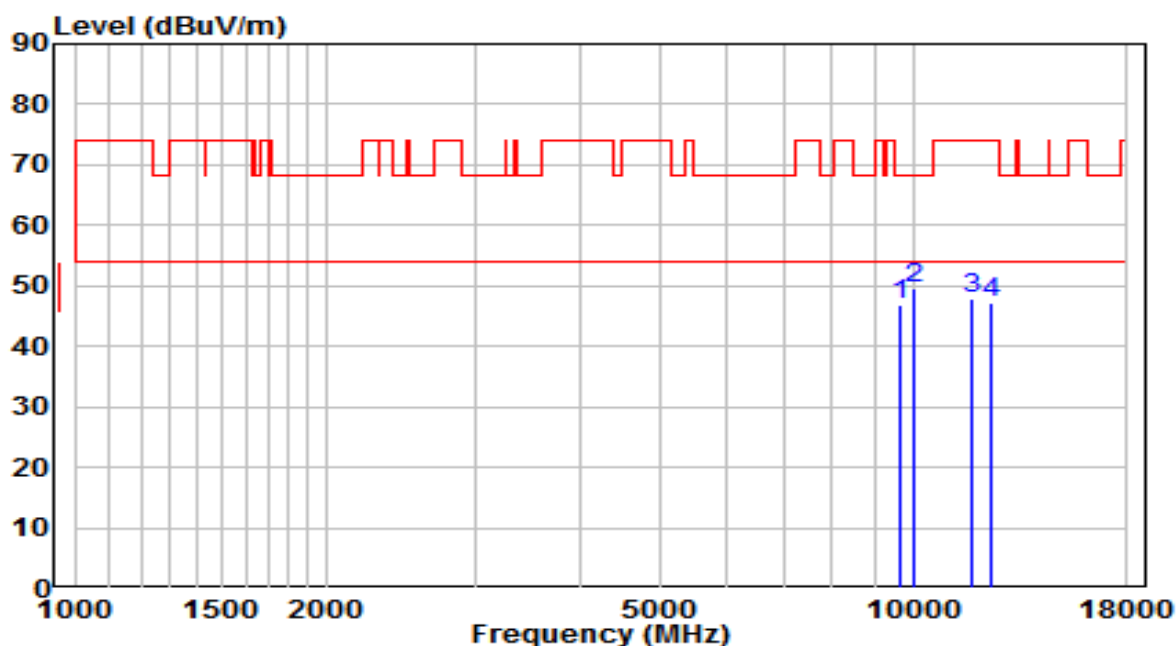


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9644.500	32.82	14.09	46.92	-21.28	68.20	Peak
2	* 10001.500	34.30	15.26	49.56	-18.64	68.20	Peak
3	11718.500	29.79	17.95	47.74	-26.26	74.00	Peak
4	12398.500	29.54	17.81	47.35	-26.65	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

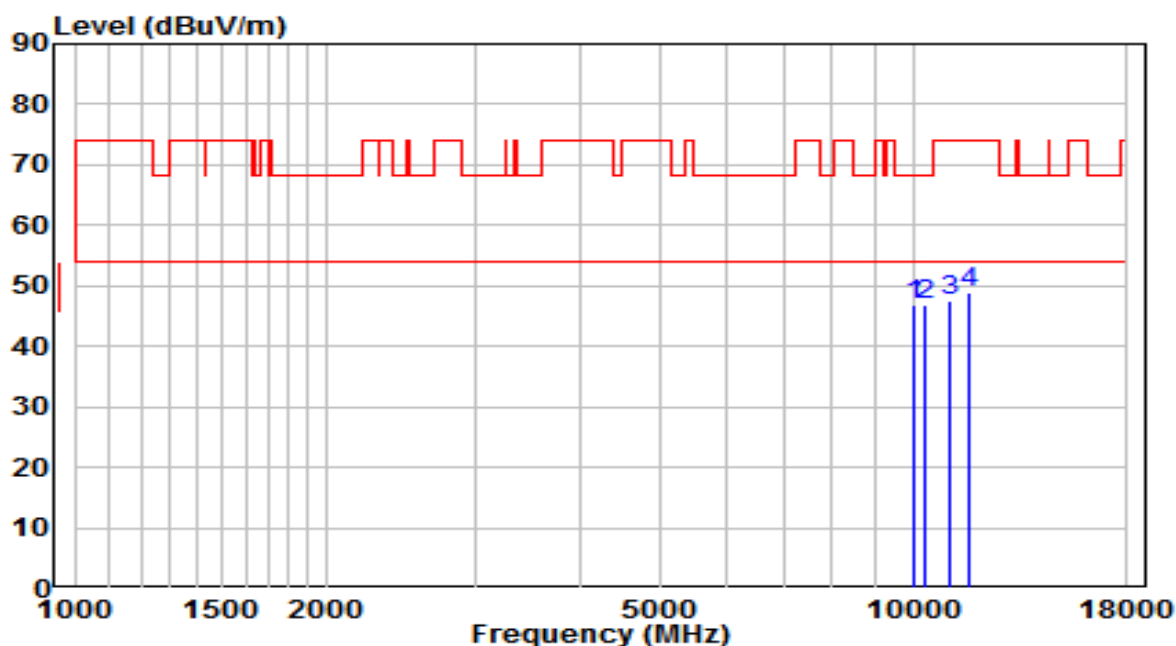


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	10010.000	31.60	15.29	46.90	-21.30	68.20	Peak
2		10367.000	30.30	16.44	46.74	-21.46	68.20	Peak
3		11072.500	29.93	17.65	47.58	-26.42	74.00	Peak
4		11659.000	30.78	17.98	48.76	-25.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

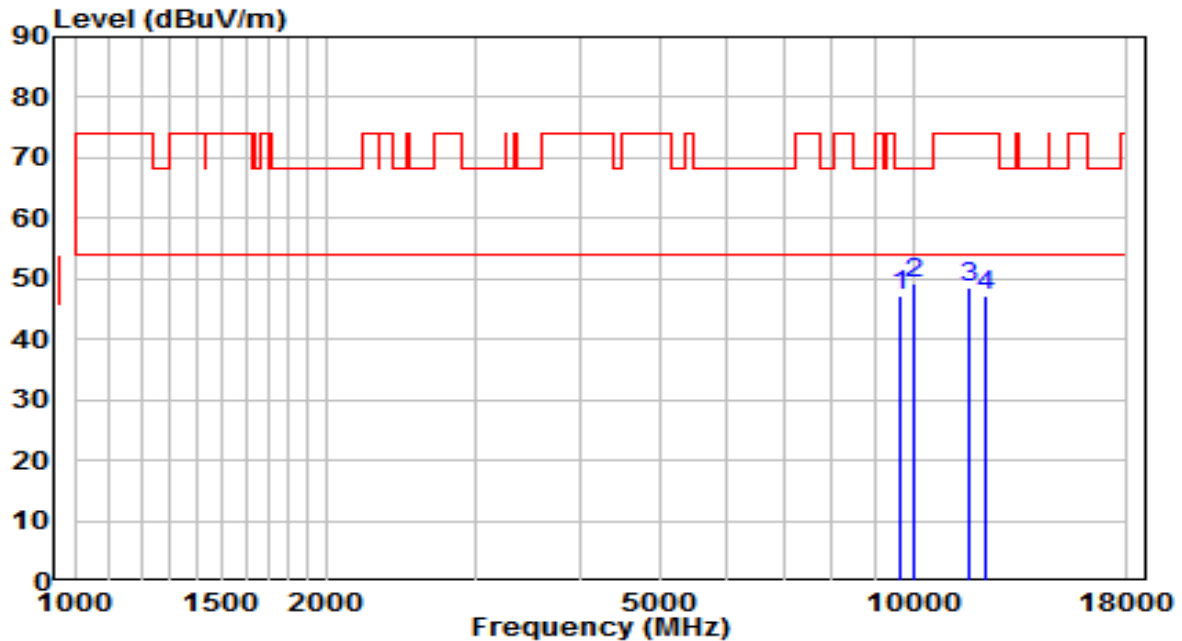


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	33.11	14.07	47.17	-21.03	68.20	Peak
2	* 10001.500	34.13	15.26	49.40	-18.80	68.20	Peak
3	11659.000	30.71	17.98	48.69	-25.31	74.00	Peak
4	12211.500	29.31	17.81	47.13	-26.87	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

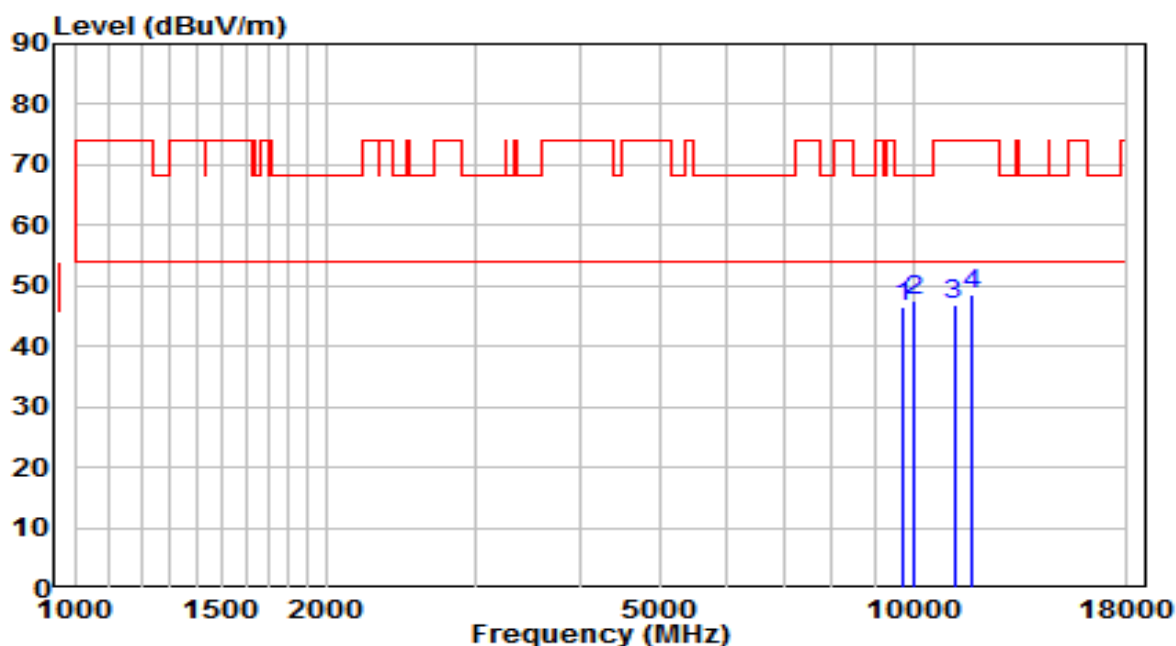


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.17	14.35	46.52	-21.68	68.20	Peak
2	* 10001.500	32.12	15.26	47.38	-20.82	68.20	Peak
3	11183.000	29.24	17.75	46.99	-27.01	74.00	Peak
4	11727.000	30.51	17.95	48.45	-25.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

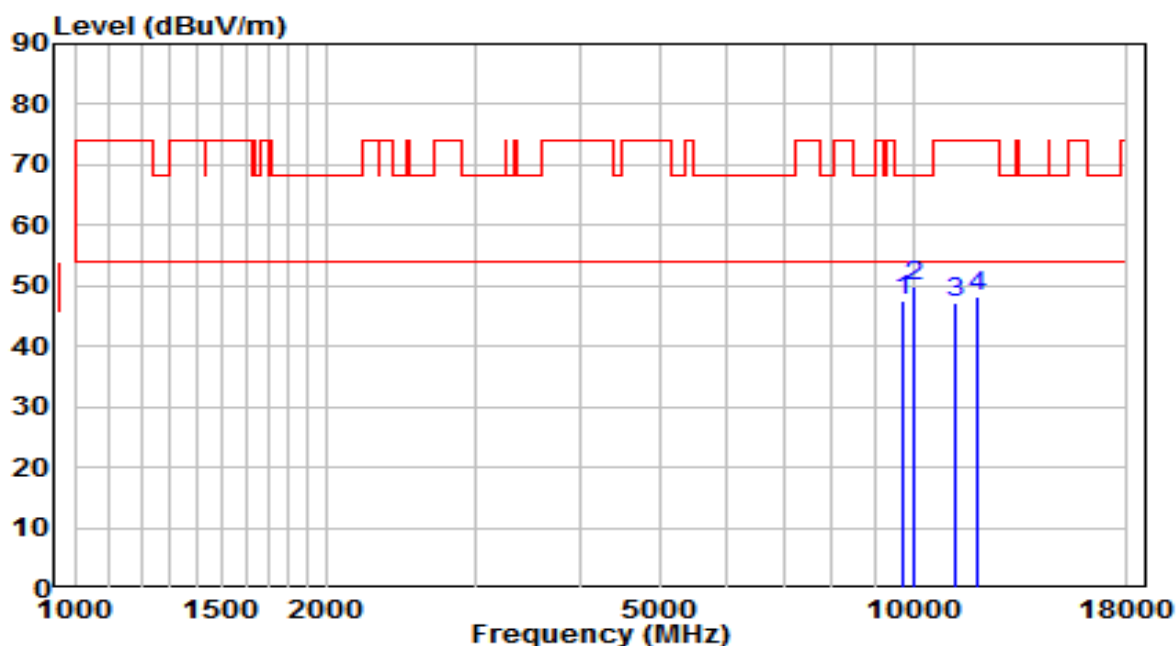


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9695.500	33.27	14.26	47.53	-20.67	68.20	Peak
2	* 10001.500	34.54	15.26	49.81	-18.39	68.20	Peak
3	11251.000	29.37	17.82	47.18	-26.82	74.00	Peak
4	11905.500	30.35	17.86	48.21	-25.79	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

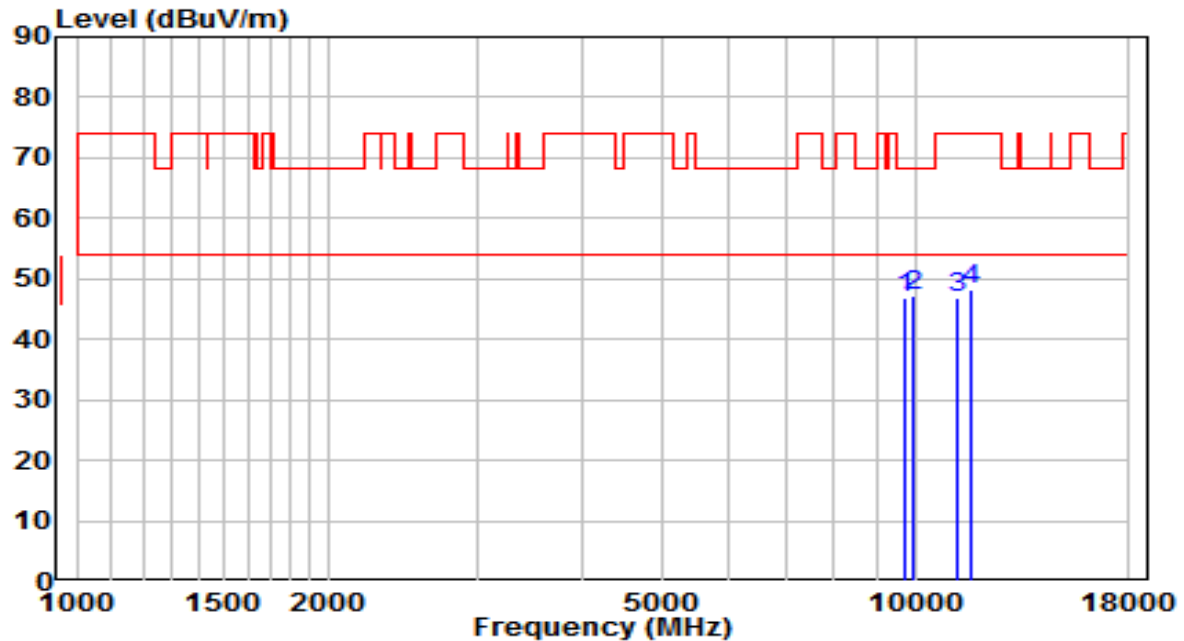


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9712.500	32.62	14.32	46.93	-21.27	68.20	Peak
2	* 9959.000	32.05	15.13	47.18	-21.02	68.20	Peak
3	11200.000	29.10	17.77	46.86	-27.14	74.00	Peak
4	11684.500	30.34	17.96	48.30	-25.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

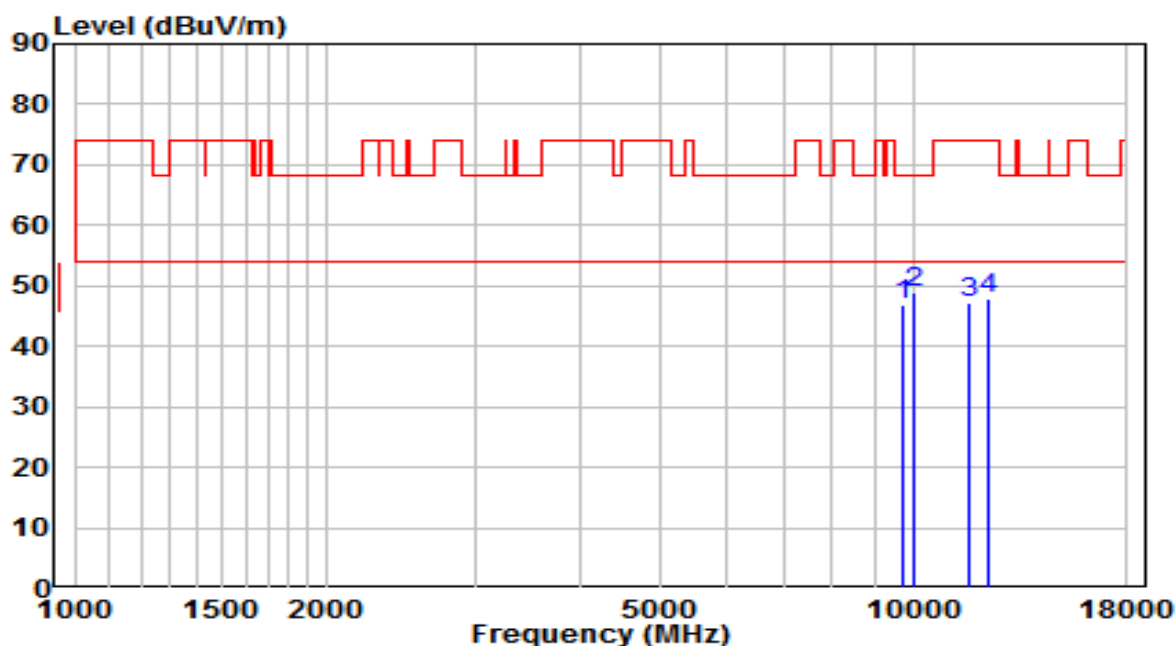


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.47	14.35	46.81	-21.39	68.20	Peak
2	* 10001.500	33.64	15.26	48.90	-19.30	68.20	Peak
3	11650.500	29.32	17.98	47.30	-26.70	74.00	Peak
4	12305.000	30.24	17.81	48.05	-25.95	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

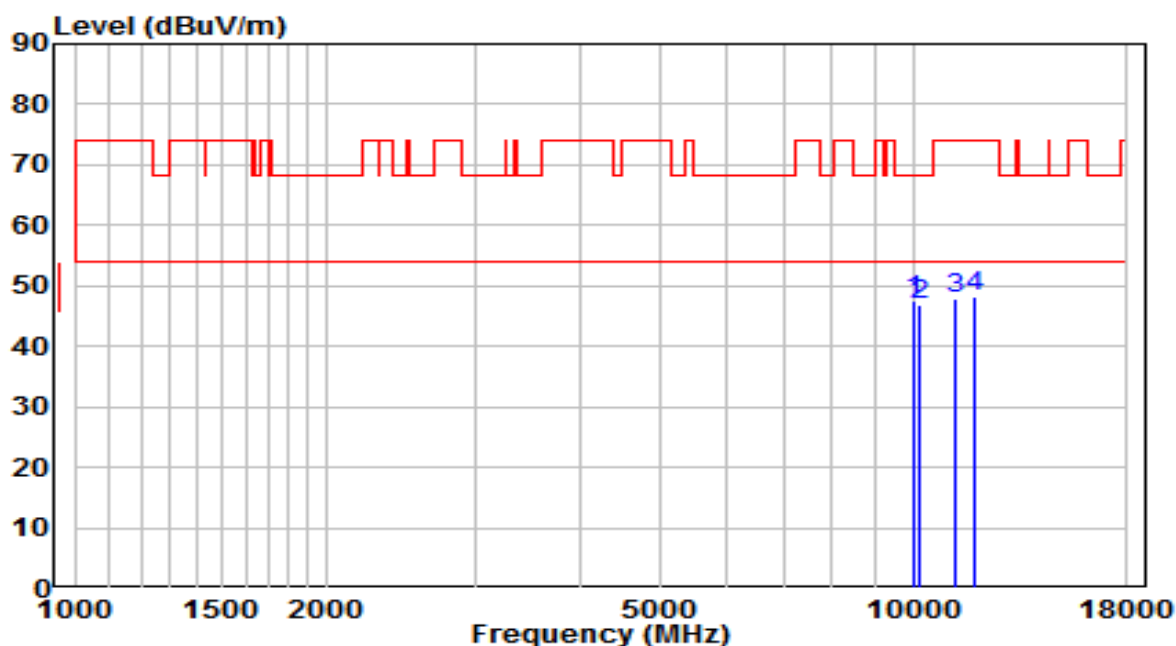


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9993.000	32.26	15.24	47.50	-20.70	68.20	Peak
2		10197.000	30.94	15.89	46.83	-21.37	68.20	Peak
3		11251.000	29.95	17.82	47.76	-26.24	74.00	Peak
4		11829.000	30.37	17.90	48.27	-25.73	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

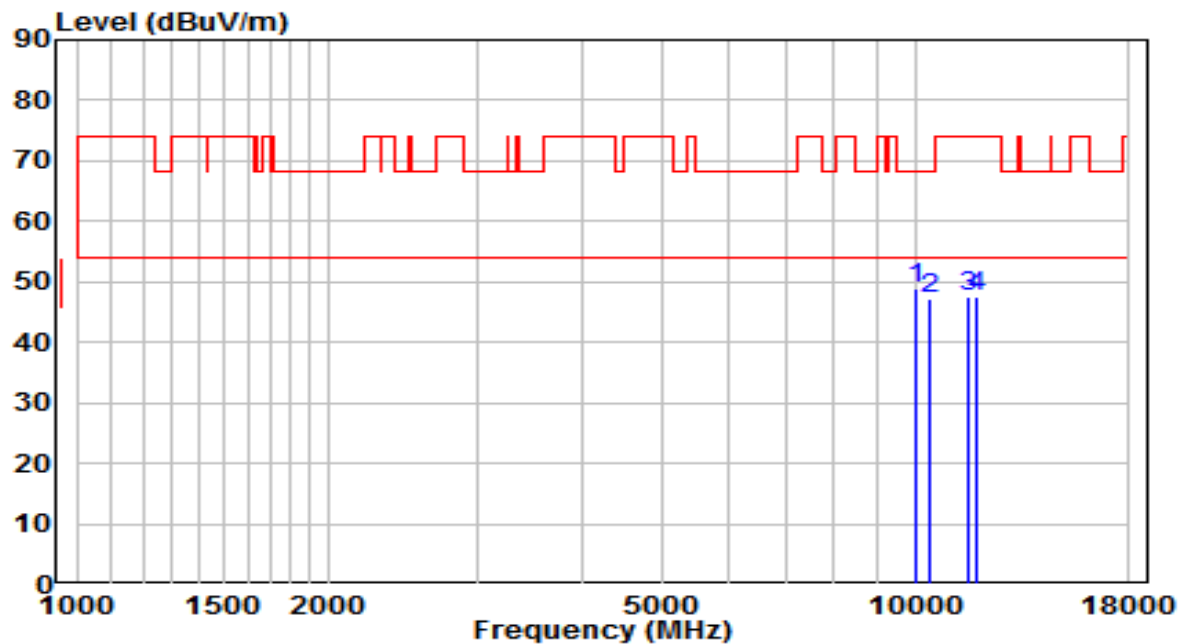


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.57	15.26	48.84	-19.36	68.20	Peak
2		10435.000	30.43	16.66	47.09	-21.11	68.20	Peak
3		11548.500	29.48	18.03	47.51	-26.49	74.00	Peak
4		11837.500	29.71	17.89	47.60	-26.40	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

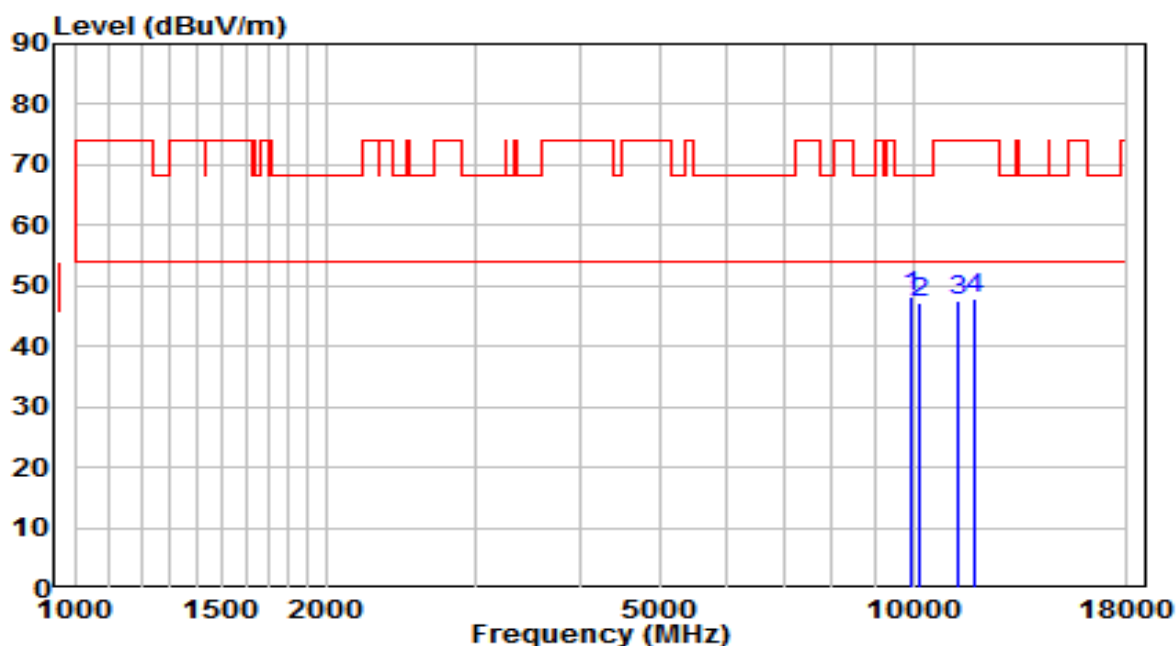


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9976.000	32.97	15.18	48.15	-20.05	68.20	Peak
2		10163.000	31.42	15.78	47.21	-20.99	68.20	Peak
3		11319.000	29.64	17.88	47.52	-26.48	74.00	Peak
4		11829.000	30.09	17.90	47.99	-26.01	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

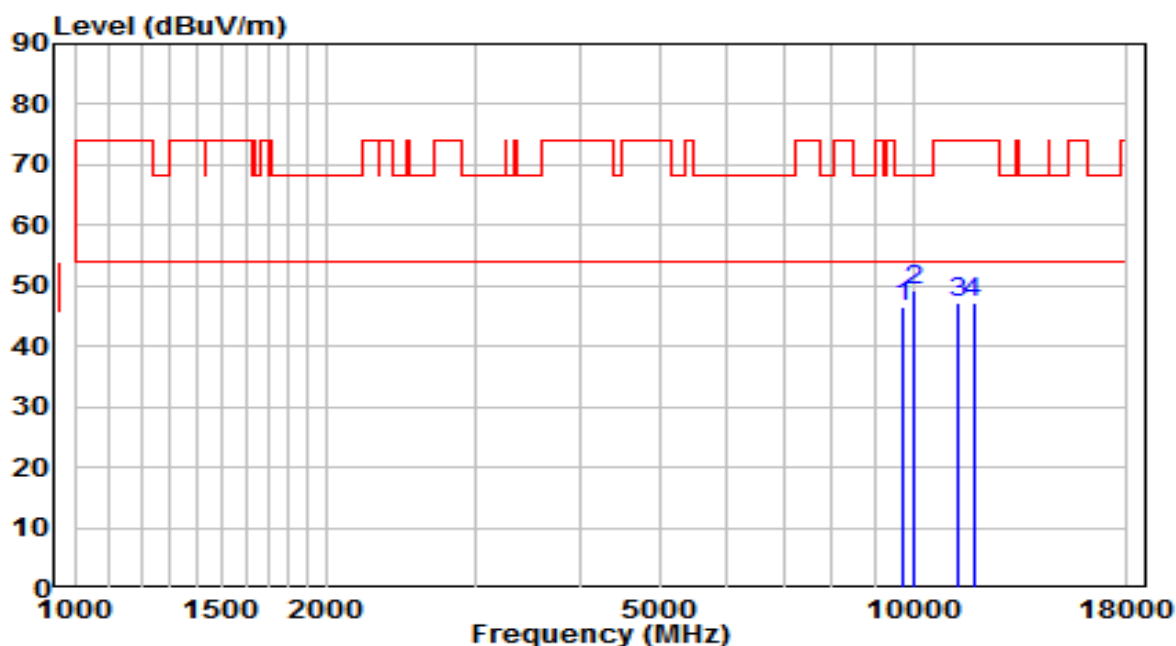


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9746.500	32.12	14.43	46.55	-21.65	68.20	Peak
2	* 10001.500	33.85	15.26	49.11	-19.09	68.20	Peak
3	11310.500	29.47	17.87	47.35	-26.65	74.00	Peak
4	11795.000	29.44	17.91	47.35	-26.65	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5690MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

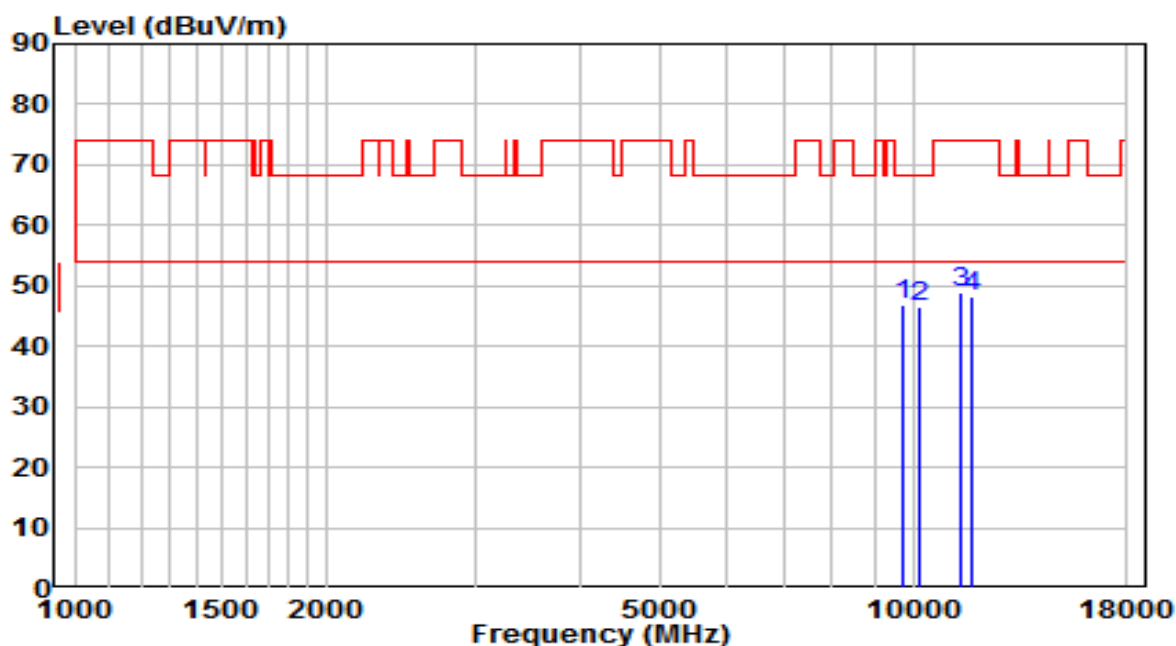


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9738.000	32.40	14.40	46.80	-21.40	68.20	Peak
2		10205.500	30.75	15.92	46.68	-21.52	68.20	Peak
3		11387.000	30.85	17.94	48.79	-25.21	74.00	Peak
4		11735.500	30.30	17.94	48.24	-25.76	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5690MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

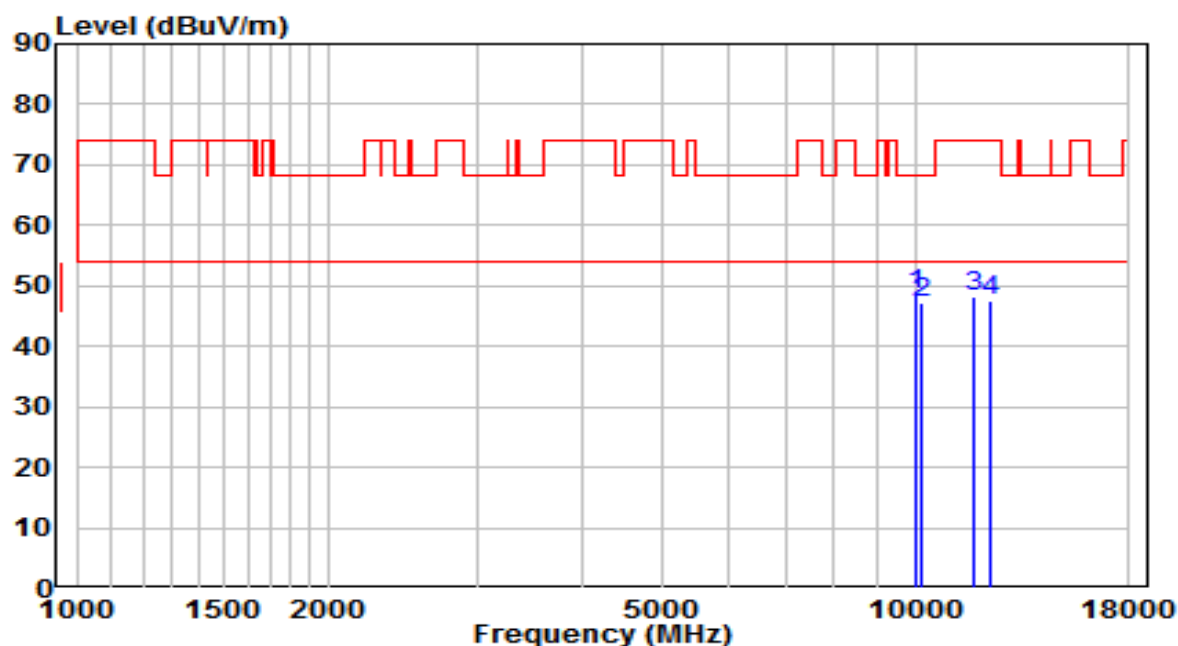


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.41	15.26	48.68	-19.52	68.20	Peak
2		10163.000	31.49	15.78	47.28	-20.92	68.20	Peak
3		11778.000	30.27	17.92	48.19	-25.81	74.00	Peak
4		12313.500	29.60	17.81	47.41	-26.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5775MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

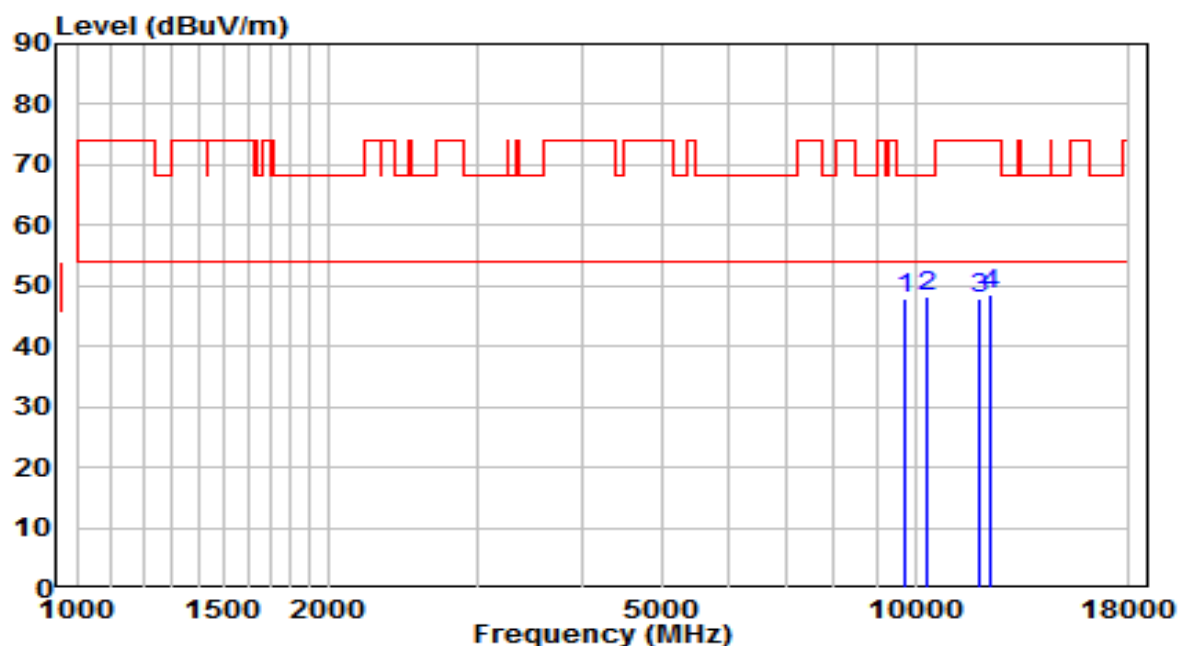


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9729.500	33.41	14.37	47.78	-20.42	68.20	Peak
2	* 10358.500	31.70	16.41	48.11	-20.09	68.20	Peak
3	11905.500	30.16	17.86	48.02	-25.98	74.00	Peak
4	12322.000	30.61	17.81	48.42	-25.58	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5775MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

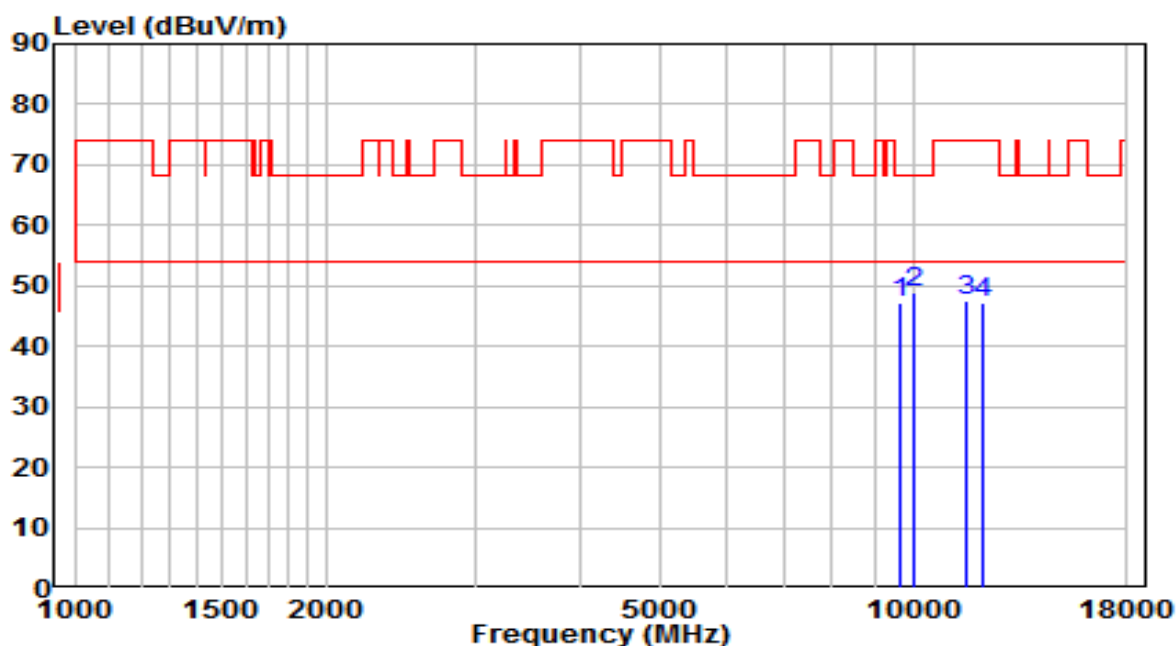


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	33.04	14.07	47.10	-21.10	68.20	Peak
2	* 10001.500	33.71	15.26	48.98	-19.22	68.20	Peak
3	11557.000	29.45	18.02	47.47	-26.53	74.00	Peak
4	12118.000	29.53	17.82	47.35	-26.65	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

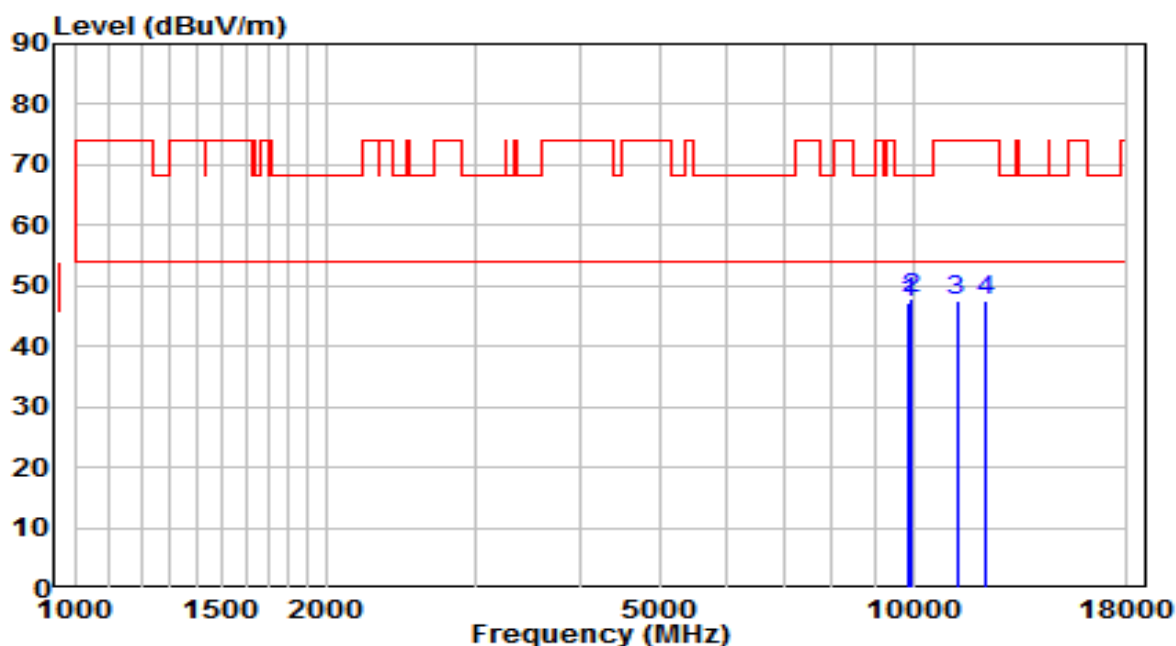


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9882.500	32.18	14.87	47.06	-21.14	68.20	Peak
2	* 9976.000	32.56	15.18	47.75	-20.45	68.20	Peak
3	11268.000	29.77	17.83	47.60	-26.40	74.00	Peak
4	12220.000	29.79	17.81	47.61	-26.39	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

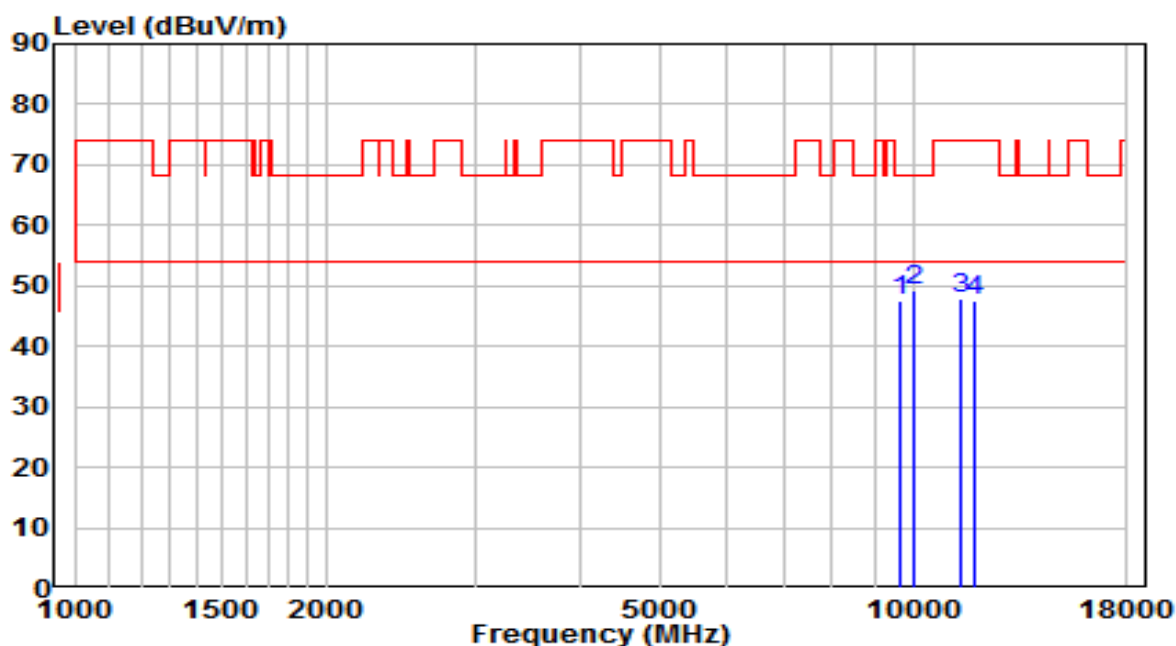


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	33.45	14.07	47.52	-20.68	68.20	Peak
2	* 10001.500	33.83	15.26	49.09	-19.11	68.20	Peak
3	11404.000	29.79	17.96	47.75	-26.25	74.00	Peak
4	11820.500	29.66	17.90	47.56	-26.44	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

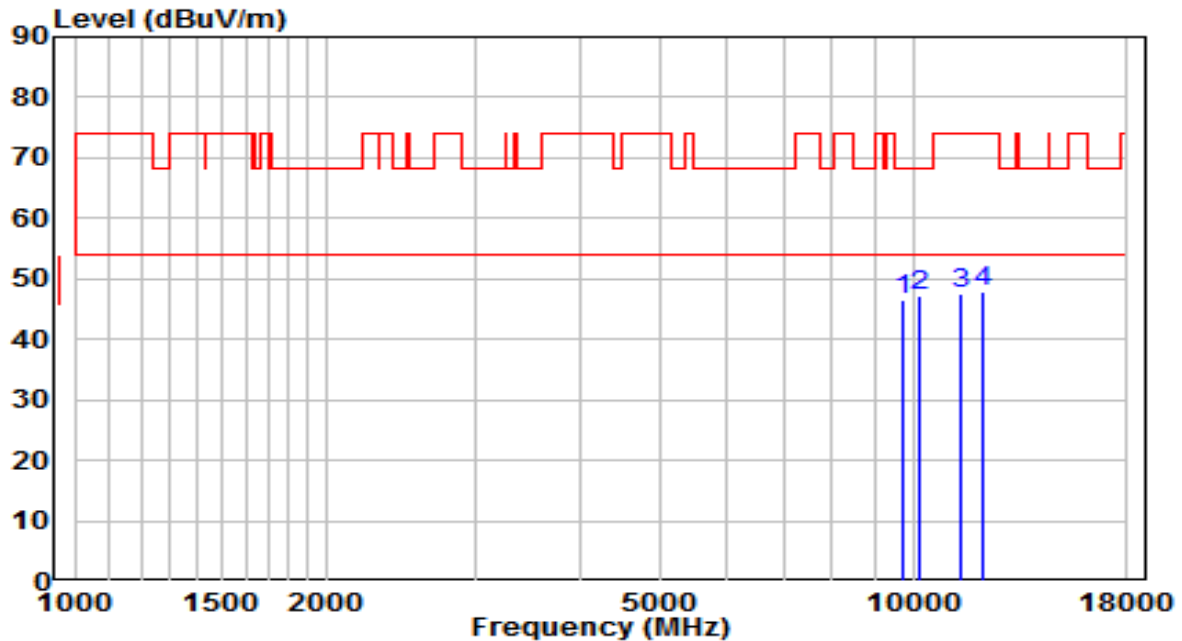


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9755.000	32.16	14.46	46.61	-21.59	68.20	Peak
2	* 10154.500	31.45	15.76	47.21	-20.99	68.20	Peak
3	11438.000	29.50	17.99	47.49	-26.51	74.00	Peak
4	12135.000	29.99	17.82	47.81	-26.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

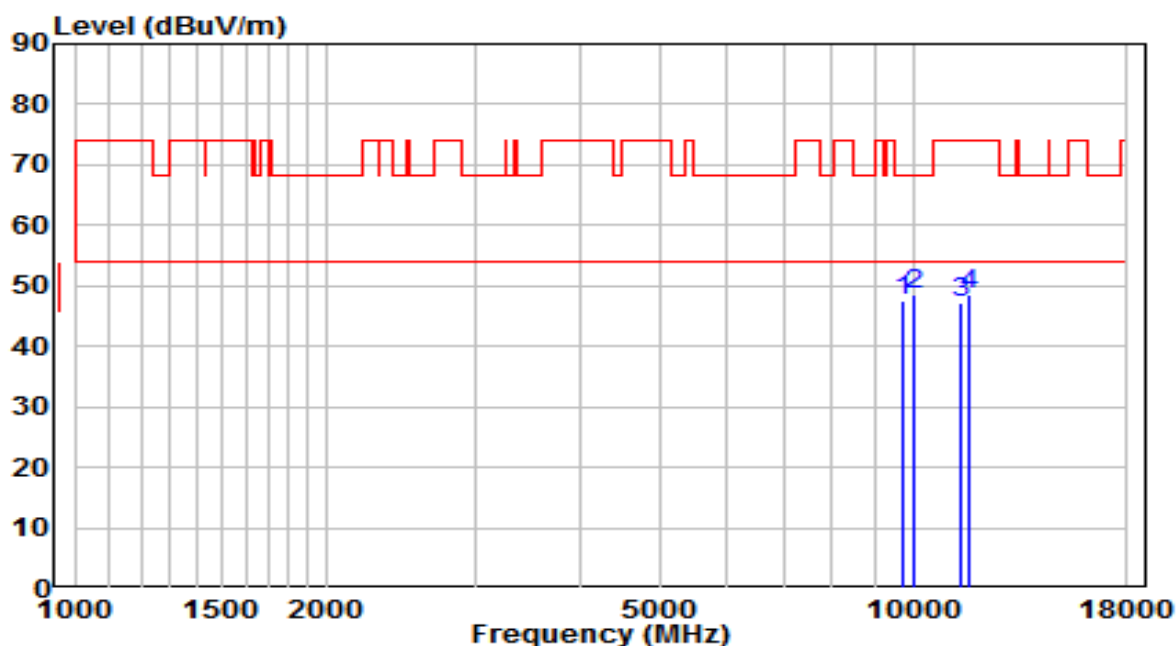


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9712.500	33.14	14.32	47.46	-20.74	68.20	Peak
2	* 10001.500	33.35	15.26	48.62	-19.58	68.20	Peak
3	11412.500	29.28	17.97	47.25	-26.75	74.00	Peak
4	11659.000	30.53	17.98	48.51	-25.49	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5220MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

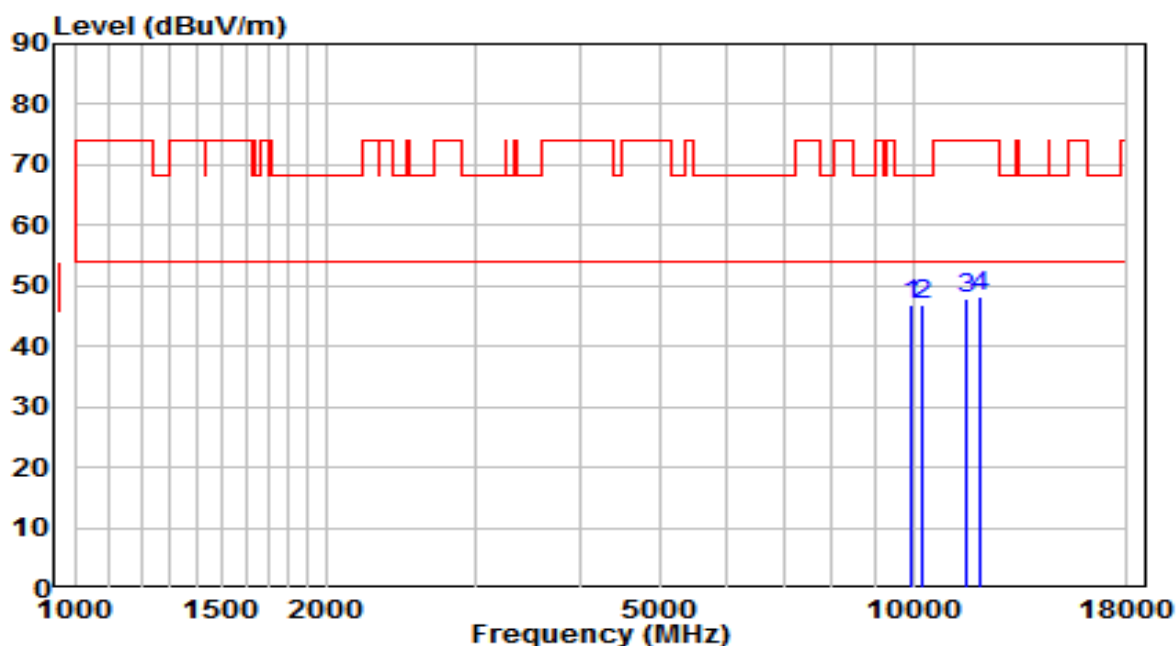


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9925.000	31.69	15.01	46.71	-21.49	68.20	Peak
2		10282.000	30.54	16.17	46.71	-21.49	68.20	Peak
3		11557.000	29.96	18.02	47.98	-26.02	74.00	Peak
4		12041.500	30.43	17.82	48.25	-25.75	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5220MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

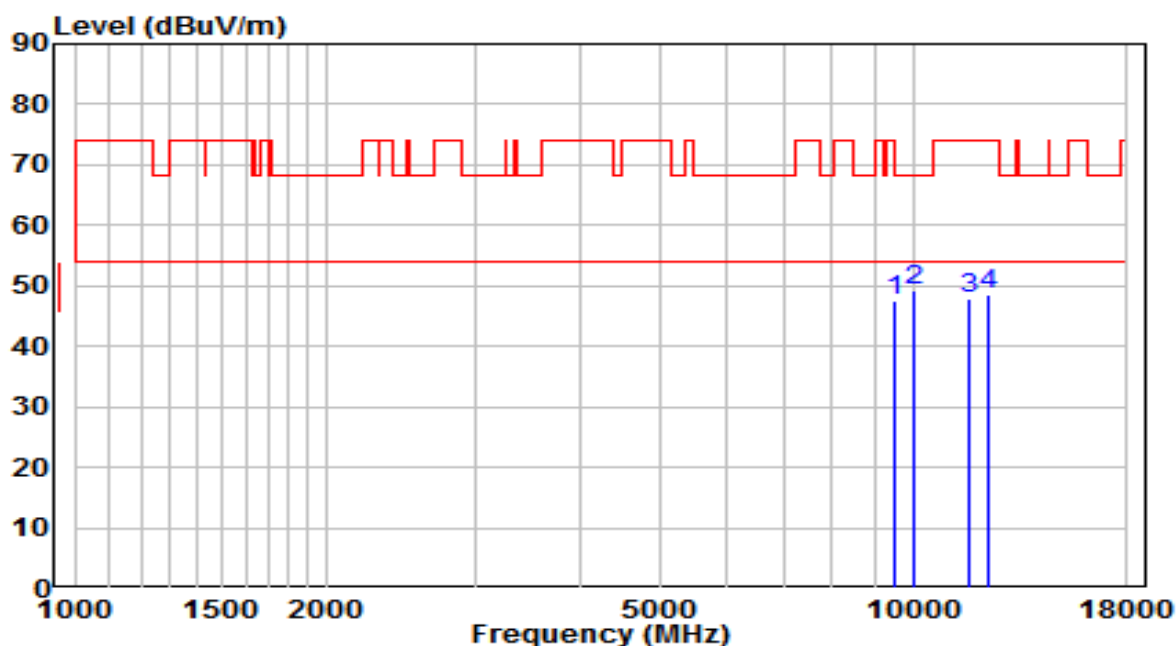


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9508.500	34.02	13.65	47.67	-20.53	68.20	Peak
2	* 10001.500	33.90	15.26	49.17	-19.03	68.20	Peak
3	11659.000	29.74	17.98	47.72	-26.28	74.00	Peak
4	12288.000	30.77	17.81	48.59	-25.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

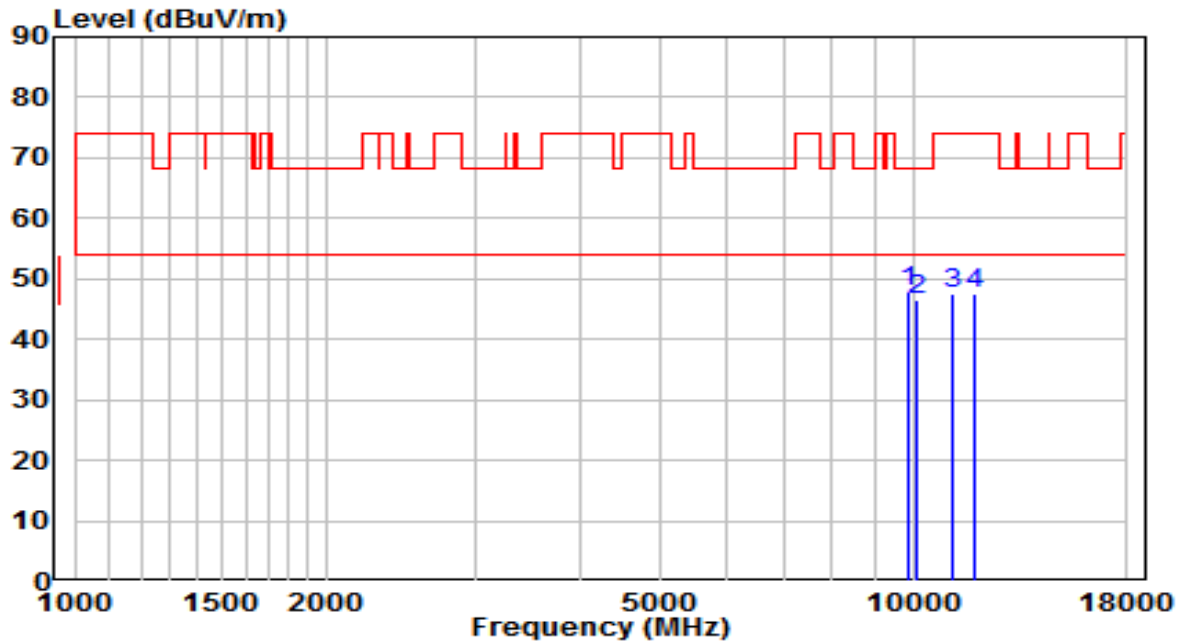


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9882.500	32.87	14.87	47.75	-20.45	68.20	Peak
2		10069.500	31.08	15.48	46.57	-21.63	68.20	Peak
3		11123.500	29.88	17.70	47.58	-26.42	74.00	Peak
4		11803.500	29.63	17.91	47.54	-26.46	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

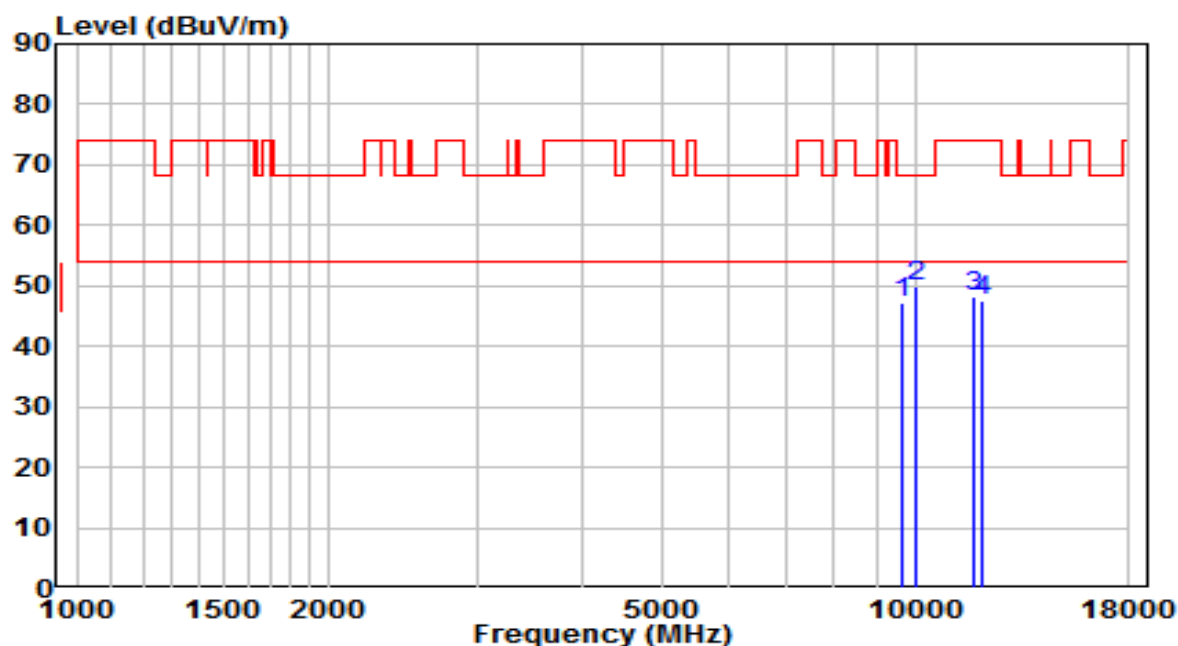


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9653.000	33.19	14.12	47.32	-20.88	68.20	Peak
2	* 10001.500	34.66	15.26	49.93	-18.27	68.20	Peak
3	11718.500	30.36	17.95	48.31	-25.69	74.00	Peak
4	11999.000	29.82	17.82	47.64	-26.36	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

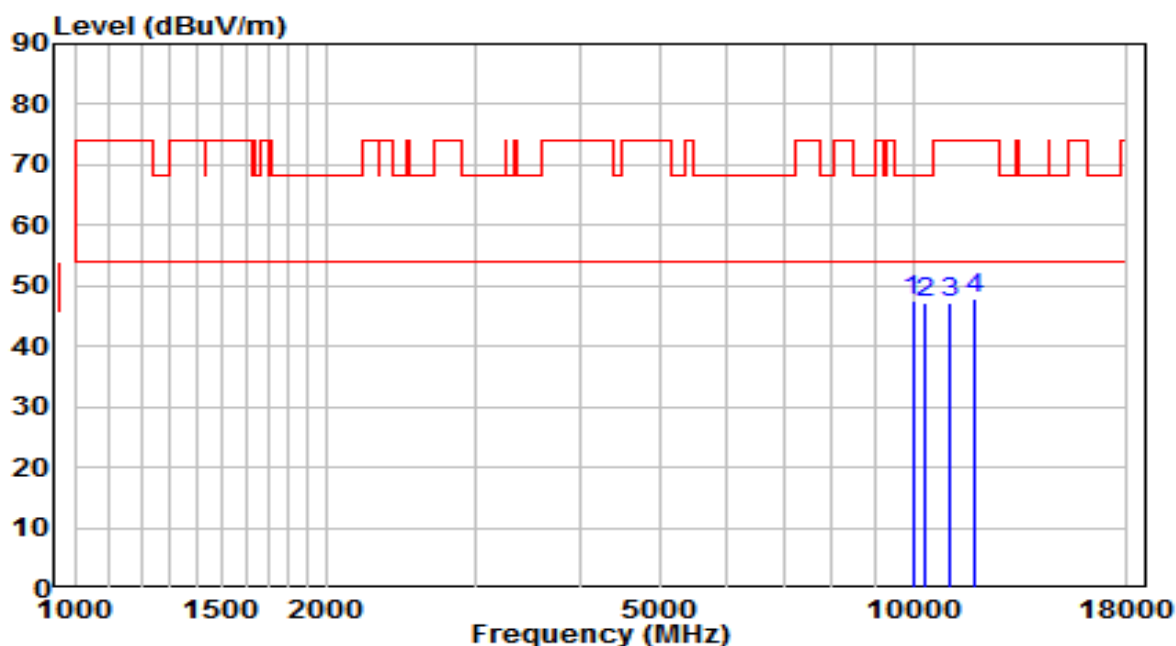


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9984.500	32.19	15.21	47.40	-20.80	68.20	Peak
2		10358.500	30.70	16.41	47.12	-21.08	68.20	Peak
3		11081.000	29.47	17.66	47.13	-26.87	74.00	Peak
4		11829.000	29.99	17.90	47.88	-26.12	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

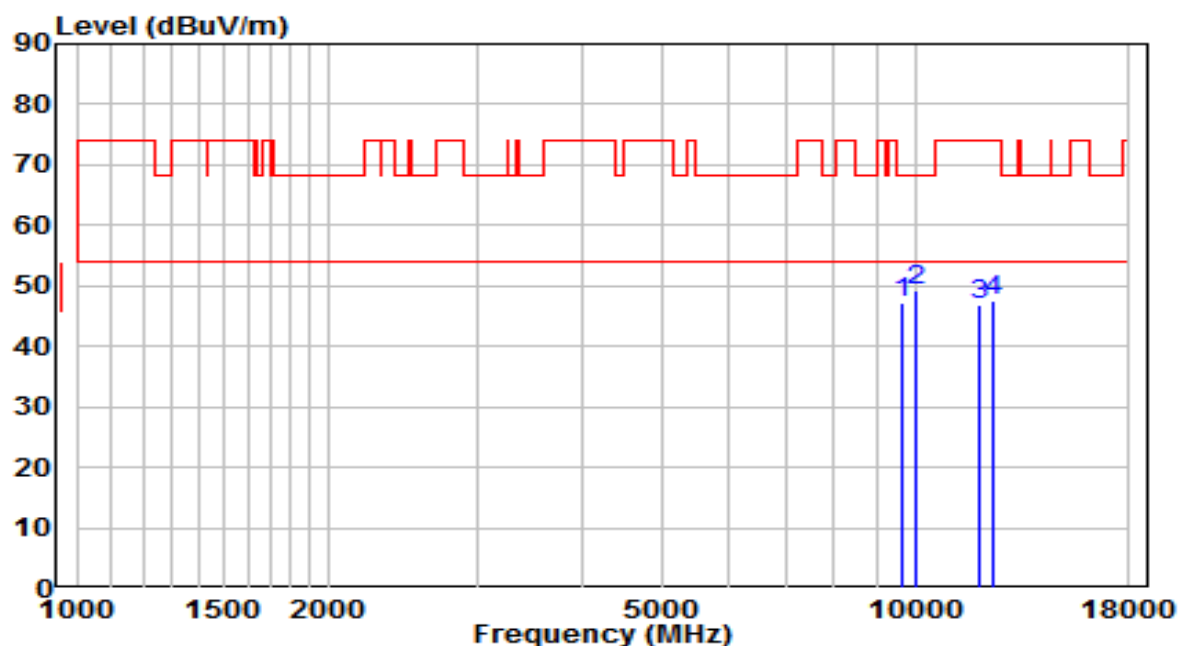


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9627.500	33.10	14.04	47.13	-21.07	68.20	Peak
2	* 10001.500	33.83	15.26	49.10	-19.10	68.20	Peak
3	11948.000	29.11	17.84	46.95	-27.05	74.00	Peak
4	12407.000	29.88	17.81	47.69	-26.31	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5580MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

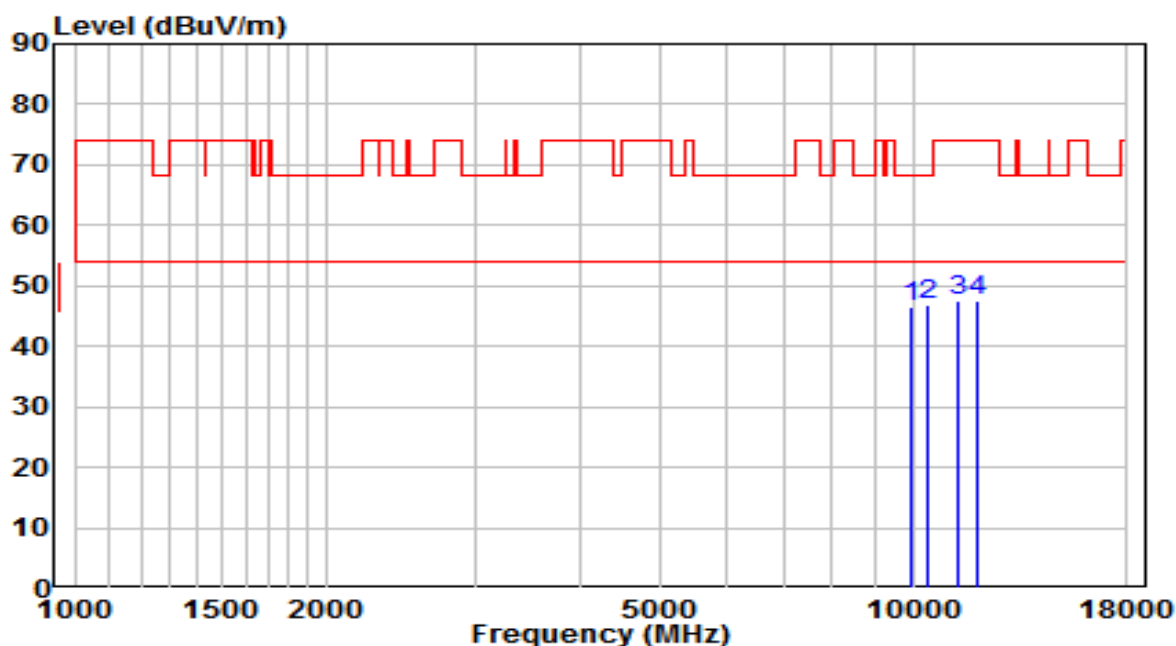


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9967.500	31.54	15.15	46.69	-21.51	68.20	Peak
2	* 10418.000	30.43	16.61	47.04	-21.16	68.20	Peak
3	11310.500	29.58	17.87	47.46	-26.54	74.00	Peak
4	11939.500	29.81	17.85	47.66	-26.34	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5580MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

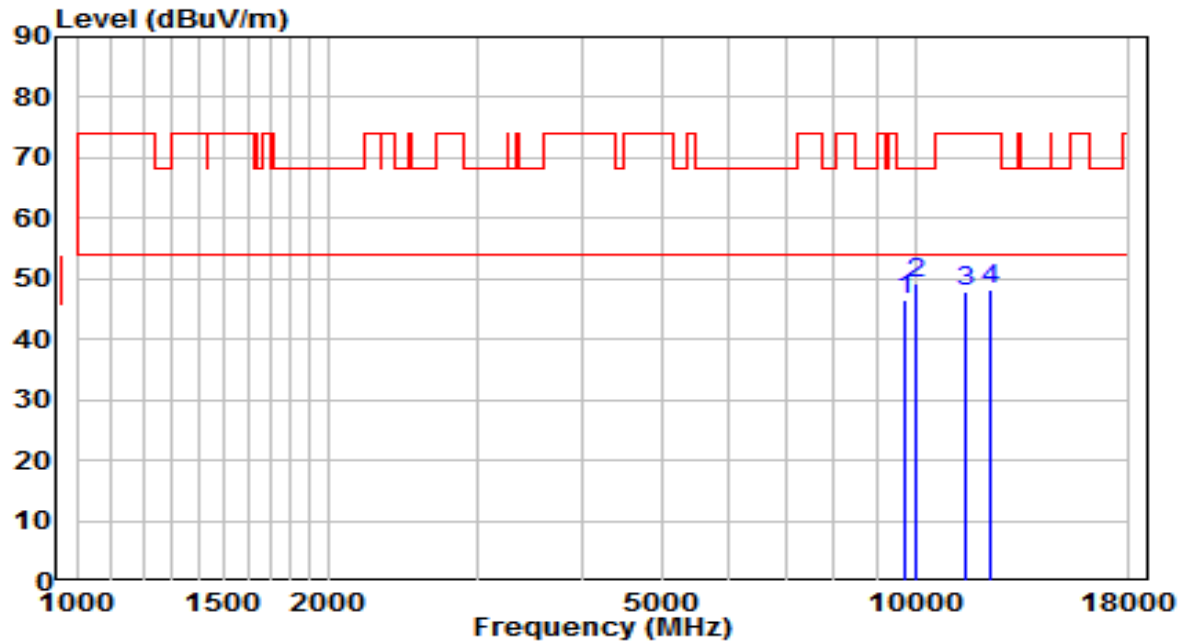


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9695.500	32.24	14.26	46.50	-21.70	68.20	Peak
2	* 10001.500	33.83	15.26	49.09	-19.11	68.20	Peak
3	11480.500	29.87	18.03	47.90	-26.10	74.00	Peak
4	12279.500	30.31	17.81	48.12	-25.88	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

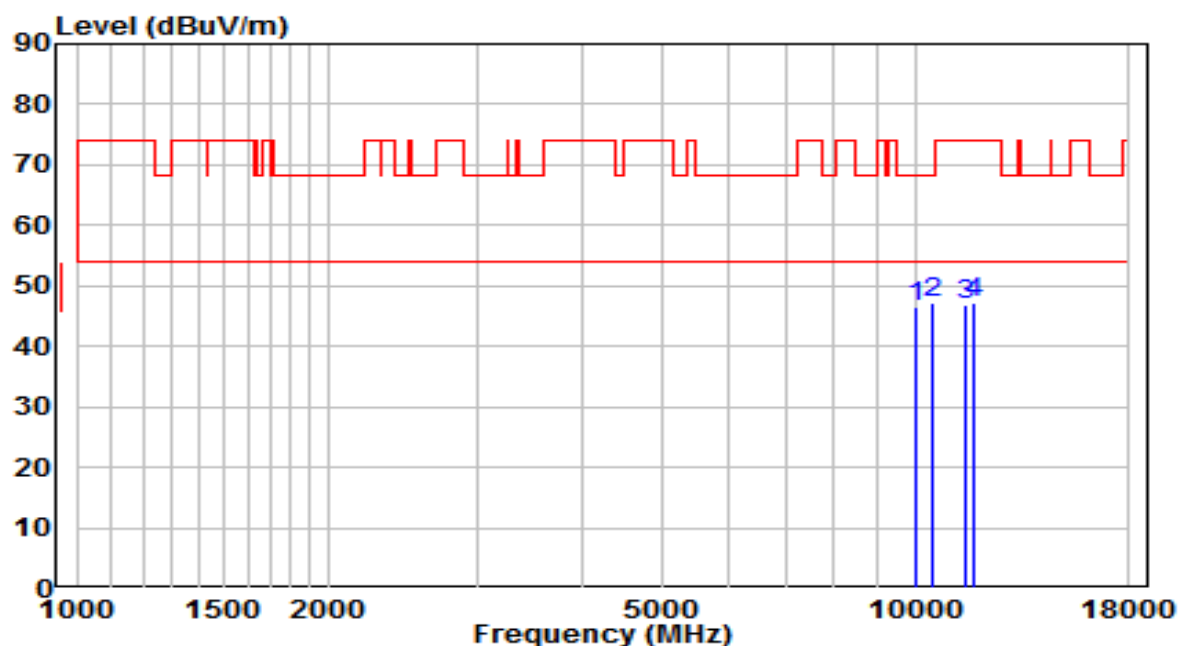


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10010.000	31.10	15.29	46.40	-21.80	68.20	Peak
2	* 10460.500	30.46	16.74	47.20	-21.00	68.20	Peak
3	11480.500	28.96	18.03	46.99	-27.01	74.00	Peak
4	11710.000	29.38	17.95	47.34	-26.66	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

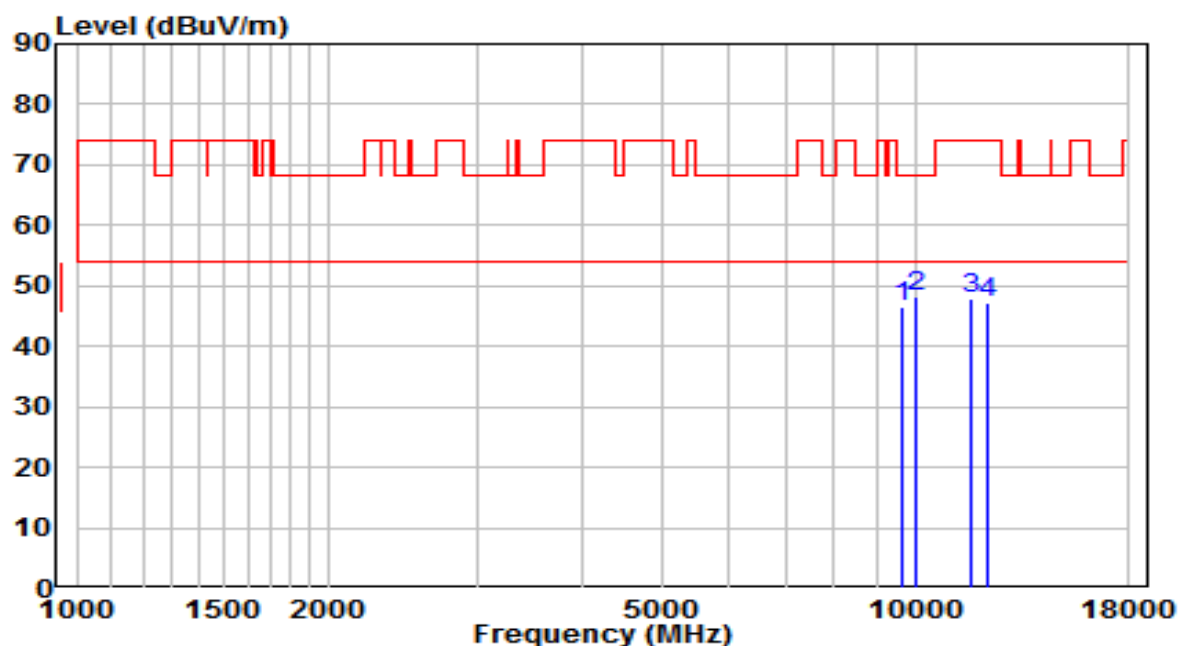


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9678.500	32.31	14.21	46.52	-21.68	68.20	Peak
2	* 10001.500	33.10	15.26	48.36	-19.84	68.20	Peak
3	11659.000	29.90	17.98	47.87	-26.13	74.00	Peak
4	12194.500	29.56	17.81	47.37	-26.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5720MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

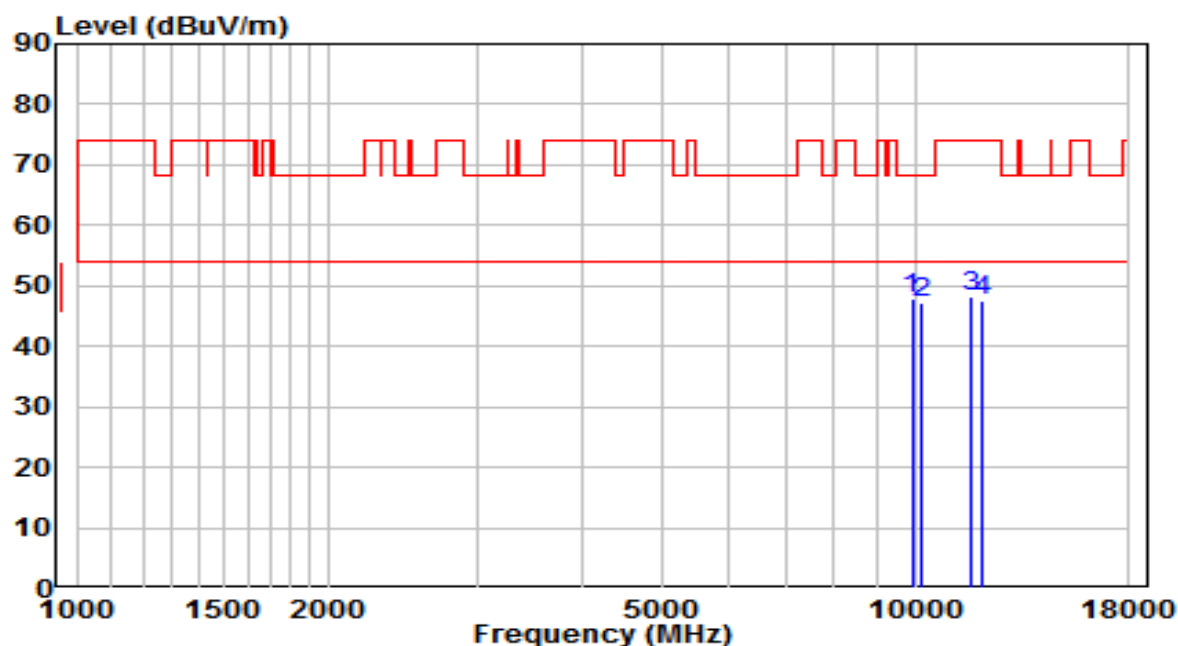


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9908.000	32.81	14.96	47.77	-20.43	68.20	Peak
2		10171.500	31.30	15.81	47.11	-21.09	68.20	Peak
3		11642.000	30.13	17.98	48.11	-25.89	74.00	Peak
4		12007.500	29.70	17.82	47.52	-26.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5720MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

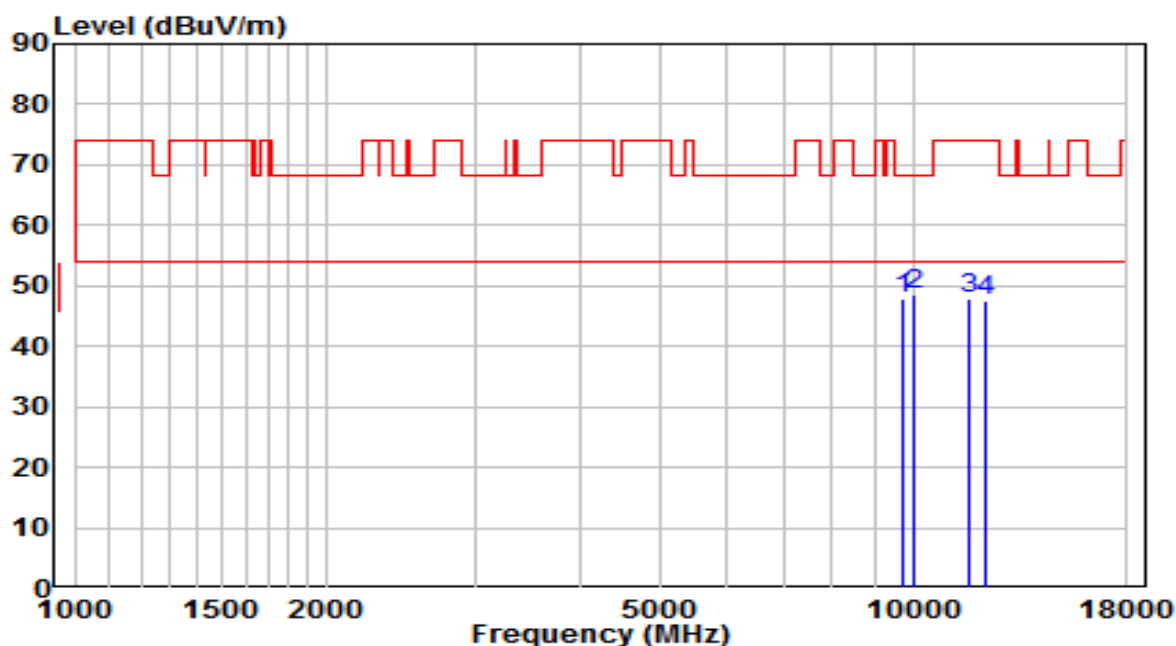


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	33.69	14.35	48.04	-20.16	68.20	Peak
2	* 10001.500	33.33	15.26	48.59	-19.61	68.20	Peak
3	11667.500	29.90	17.97	47.87	-26.13	74.00	Peak
4	12245.500	29.86	17.81	47.67	-26.33	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

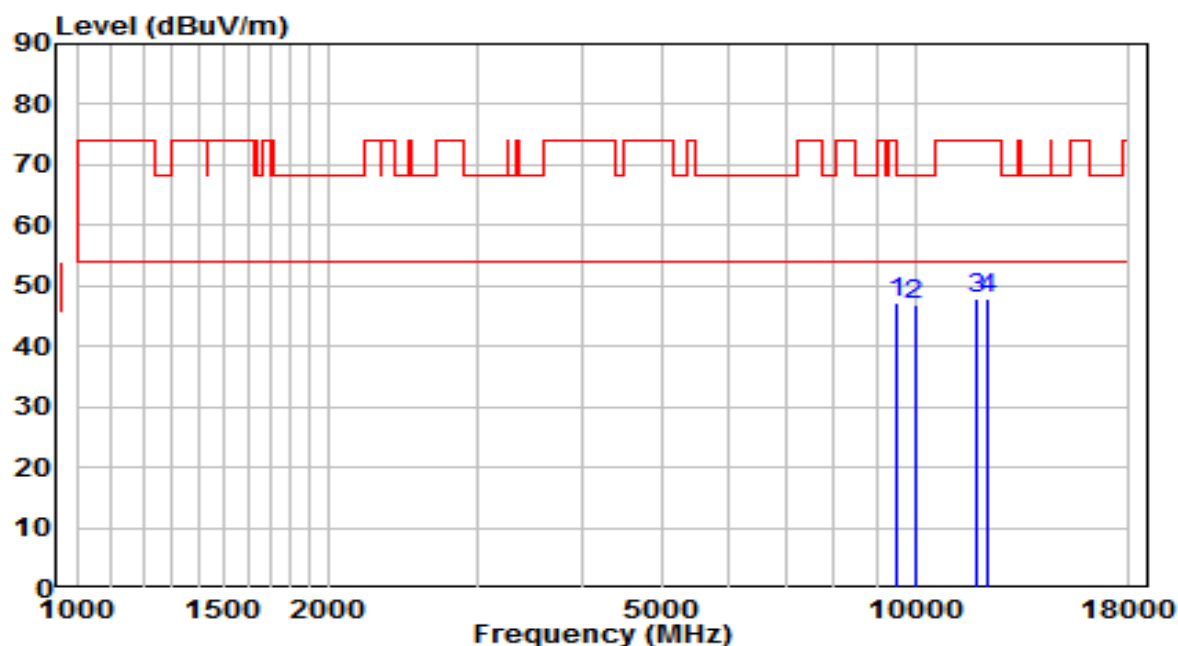


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9517.000	33.58	13.68	47.25	-20.95	68.20	Peak
2		9984.500	31.69	15.21	46.90	-21.30	68.20	Peak
3		11829.000	29.87	17.90	47.77	-26.23	74.00	Peak
4		12203.000	29.98	17.81	47.79	-26.21	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

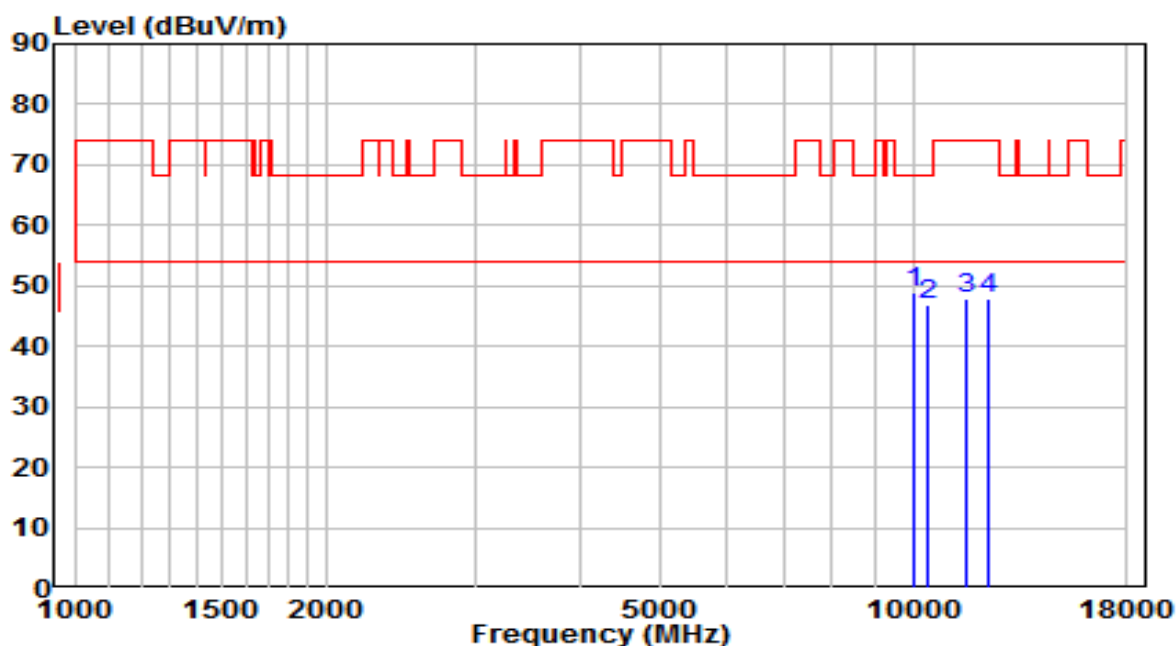


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.54	15.26	48.80	-19.40	68.20	Peak
2		10375.500	30.49	16.47	46.96	-21.24	68.20	Peak
3		11540.000	29.87	18.03	47.90	-26.10	74.00	Peak
4		12305.000	30.02	17.81	47.83	-26.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5785MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

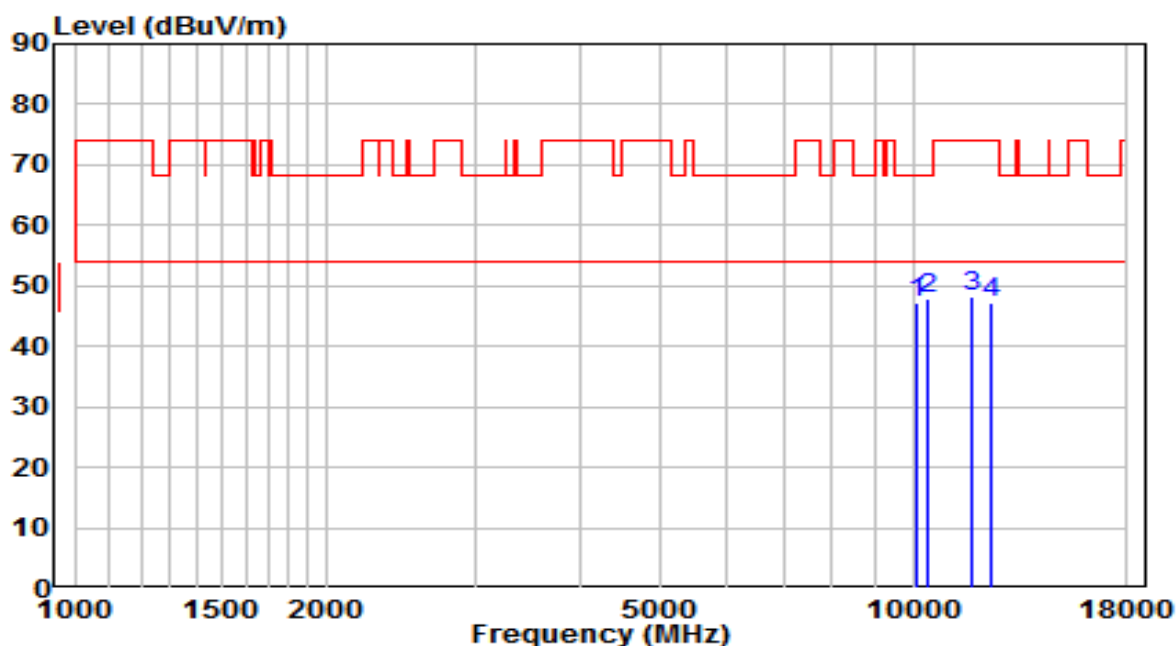


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10112.000	31.42	15.62	47.04	-21.16	68.20	Peak
2	* 10392.500	31.29	16.52	47.82	-20.38	68.20	Peak
3	11735.500	30.31	17.94	48.25	-25.75	74.00	Peak
4	12381.500	29.28	17.81	47.09	-26.91	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5785MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

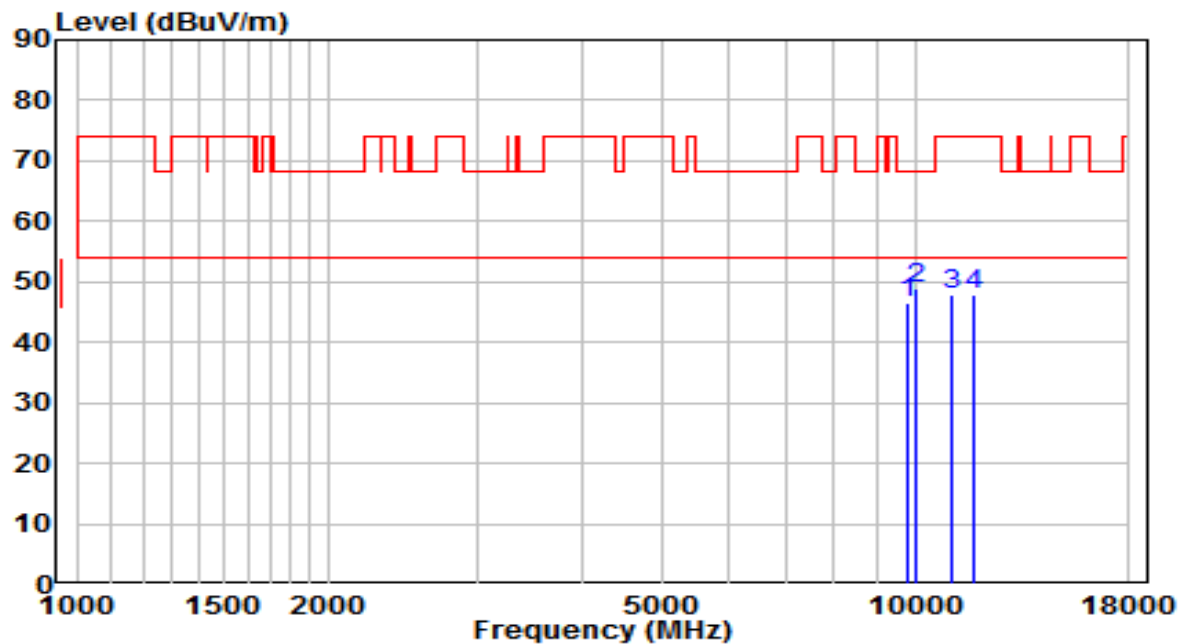


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9806.000	31.92	14.62	46.54	-21.66	68.20	Peak
2	* 10001.500	33.62	15.26	48.88	-19.32	68.20	Peak
3	11072.500	30.07	17.65	47.72	-26.28	74.00	Peak
4	11727.000	29.91	17.95	47.86	-26.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

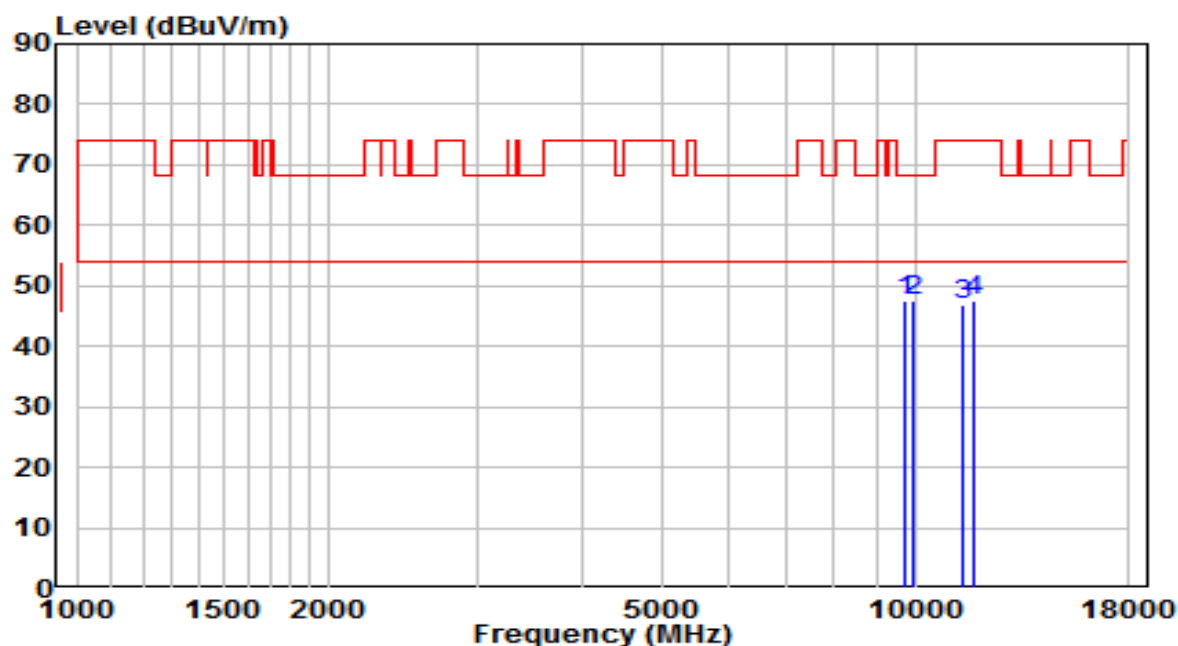


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9695.500	33.38	14.26	47.64	-20.56	68.20	Peak
2		9967.500	32.27	15.15	47.42	-20.78	68.20	Peak
3		11370.000	29.05	17.93	46.98	-27.02	74.00	Peak
4		11727.000	29.68	17.95	47.63	-26.37	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

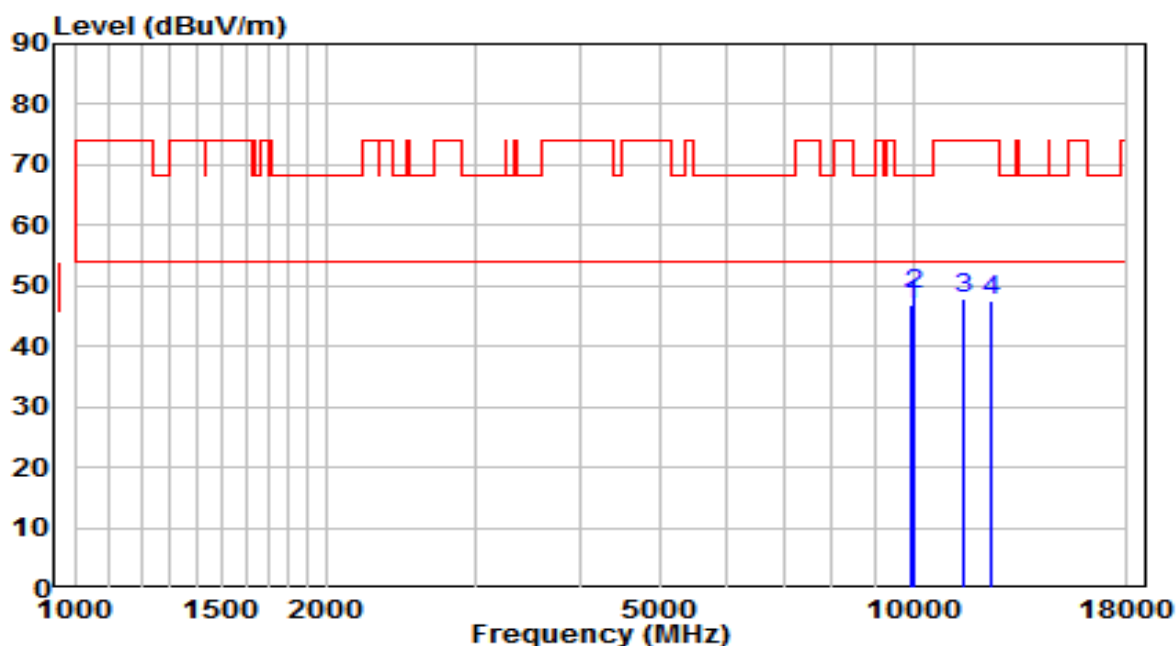


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9942.000	31.95	15.07	47.02	-21.18	68.20	Peak
2	* 10001.500	33.43	15.26	48.70	-19.50	68.20	Peak
3	11472.000	29.98	18.02	48.00	-26.00	74.00	Peak
4	12381.500	29.84	17.81	47.65	-26.35	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

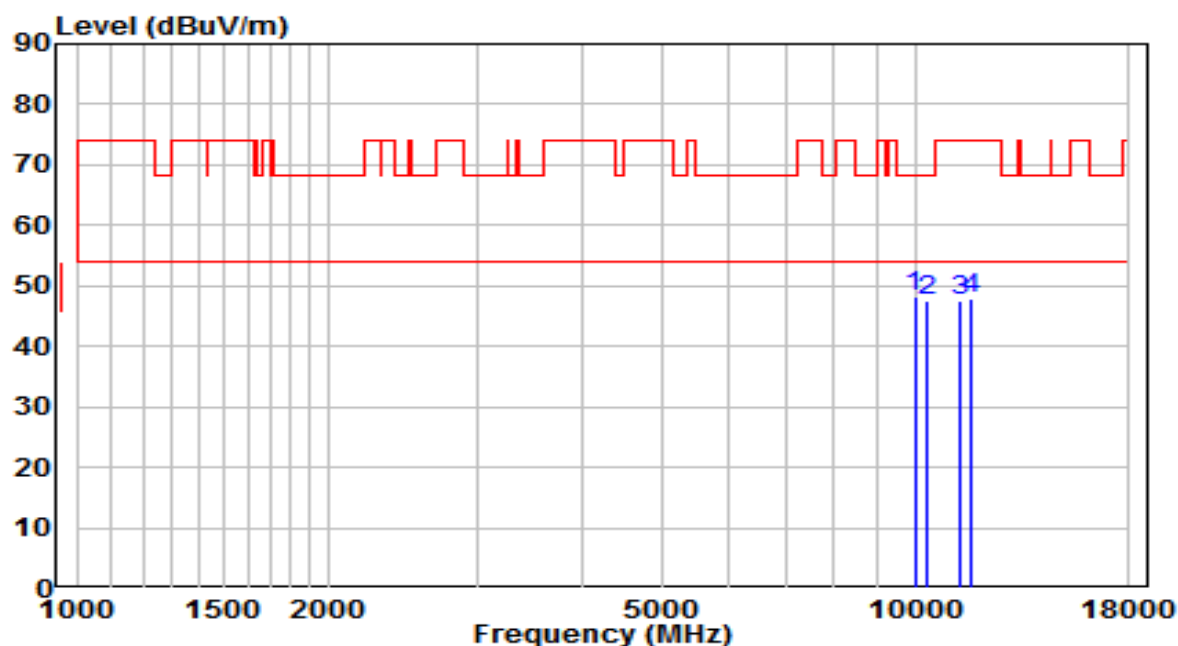


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9984.500	32.87	15.21	48.08	-20.12	68.20	Peak
2		10358.500	31.00	16.41	47.41	-20.79	68.20	Peak
3		11319.000	29.63	17.88	47.51	-26.49	74.00	Peak
4		11667.500	29.82	17.97	47.79	-26.21	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

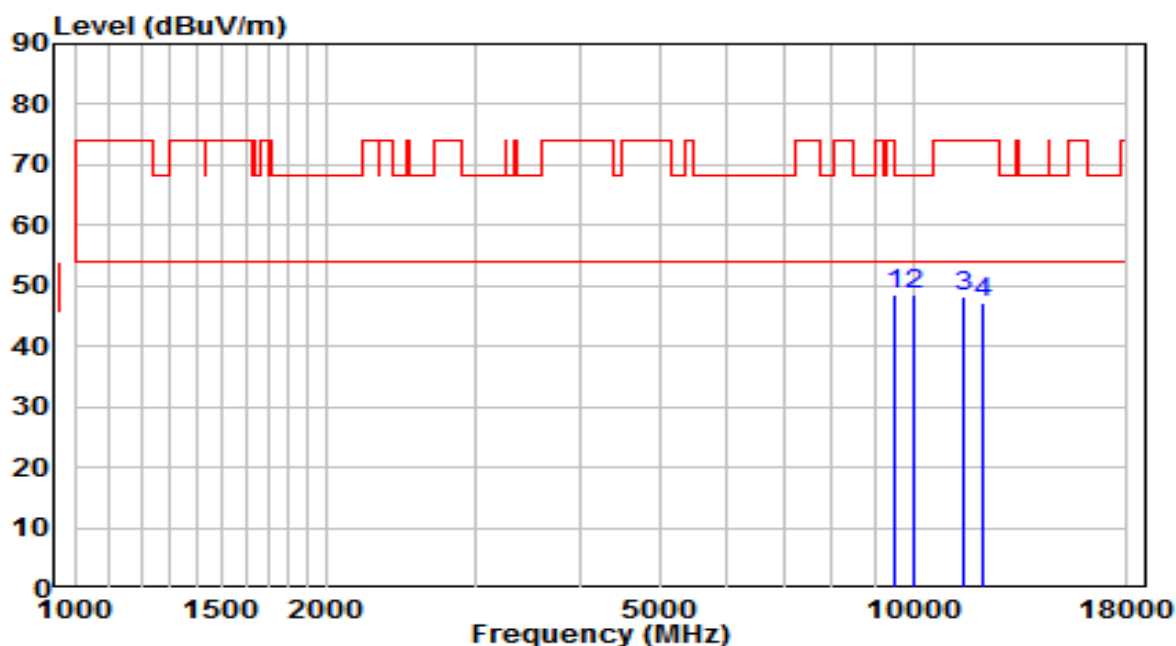


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9534.000	34.91	13.73	48.64	-19.56	68.20	Peak
2		10001.500	33.34	15.26	48.61	-19.59	68.20	Peak
3		11480.500	30.05	18.03	48.08	-25.92	74.00	Peak
4		12118.000	29.42	17.82	47.24	-26.76	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

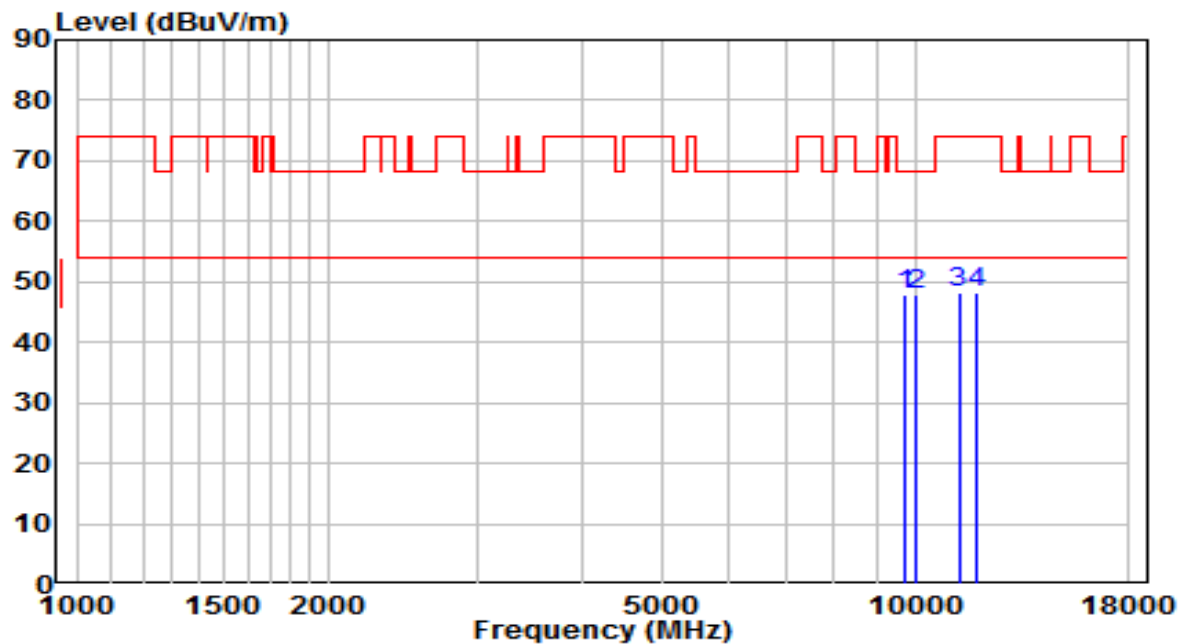


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9721.000	33.52	14.35	47.87	-20.33	68.20	Peak
2		10010.000	32.48	15.29	47.77	-20.43	68.20	Peak
3		11268.000	30.24	17.83	48.07	-25.93	74.00	Peak
4		11837.500	30.28	17.89	48.18	-25.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

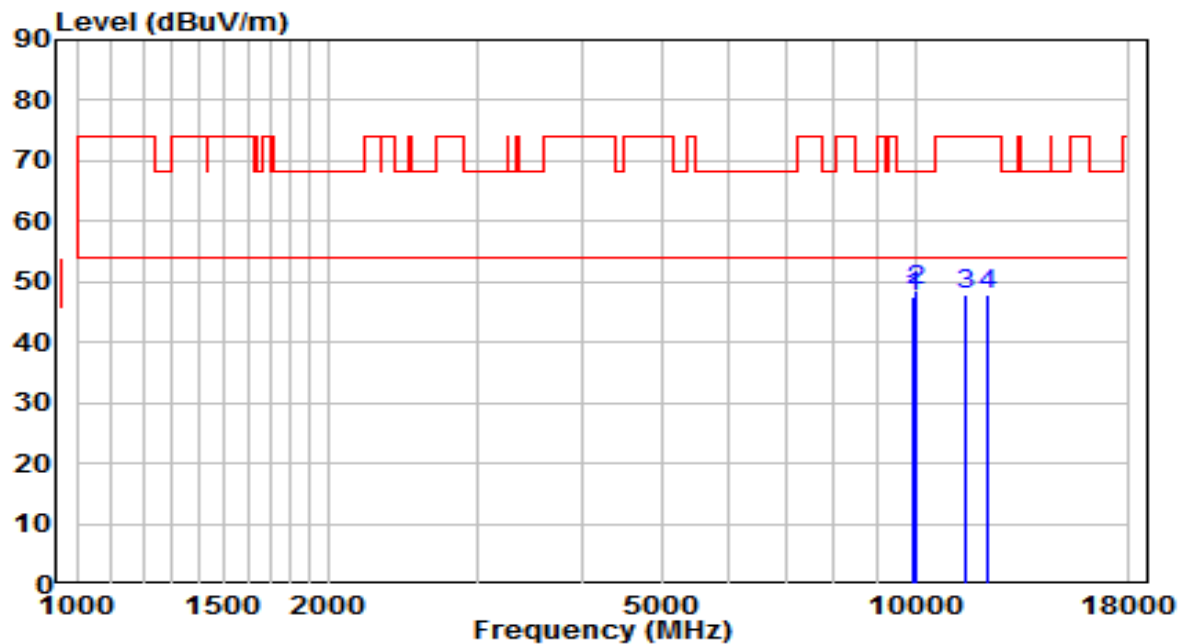


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9916.500	32.69	14.99	47.68	-20.52	68.20	Peak
2	* 10001.500	33.22	15.26	48.49	-19.71	68.20	Peak
3	11480.500	29.73	18.03	47.76	-26.24	74.00	Peak
4	12220.000	30.04	17.81	47.85	-26.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

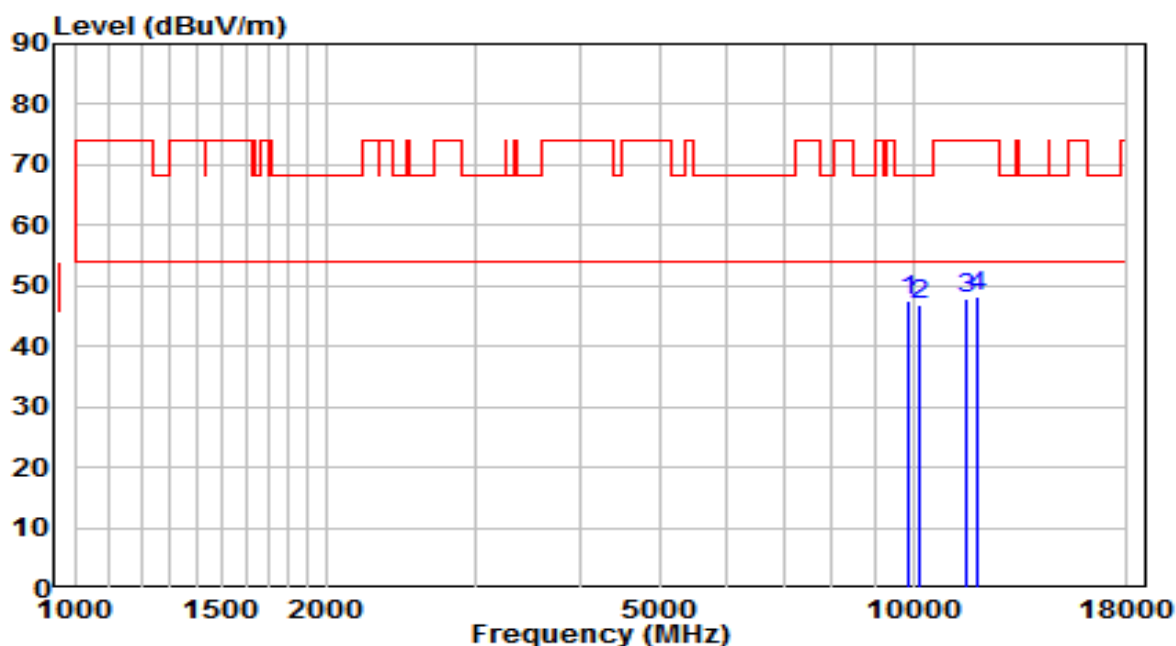


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9882.500	32.72	14.87	47.59	-20.61	68.20	Peak
2		10146.000	31.12	15.73	46.85	-21.35	68.20	Peak
3		11548.500	29.69	18.03	47.72	-26.28	74.00	Peak
4		11931.000	30.38	17.85	48.23	-25.77	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

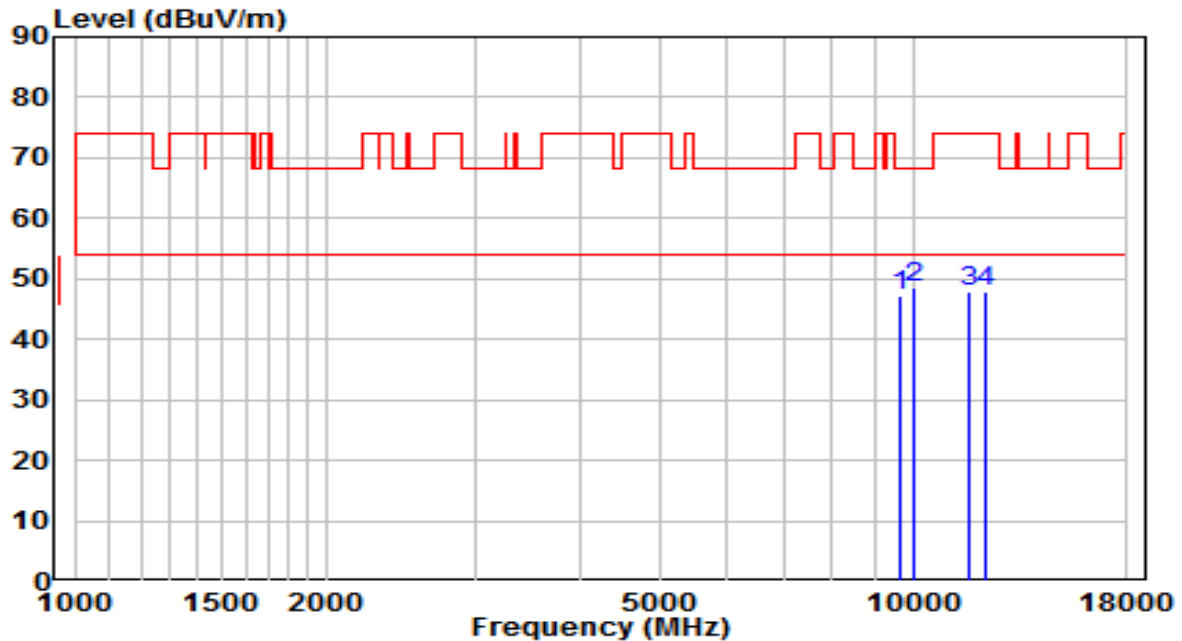


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	33.02	14.07	47.09	-21.11	68.20	Peak
2	* 10001.500	33.41	15.26	48.67	-19.53	68.20	Peak
3	11633.500	29.97	17.99	47.95	-26.05	74.00	Peak
4	12160.500	30.15	17.82	47.97	-26.03	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5550MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

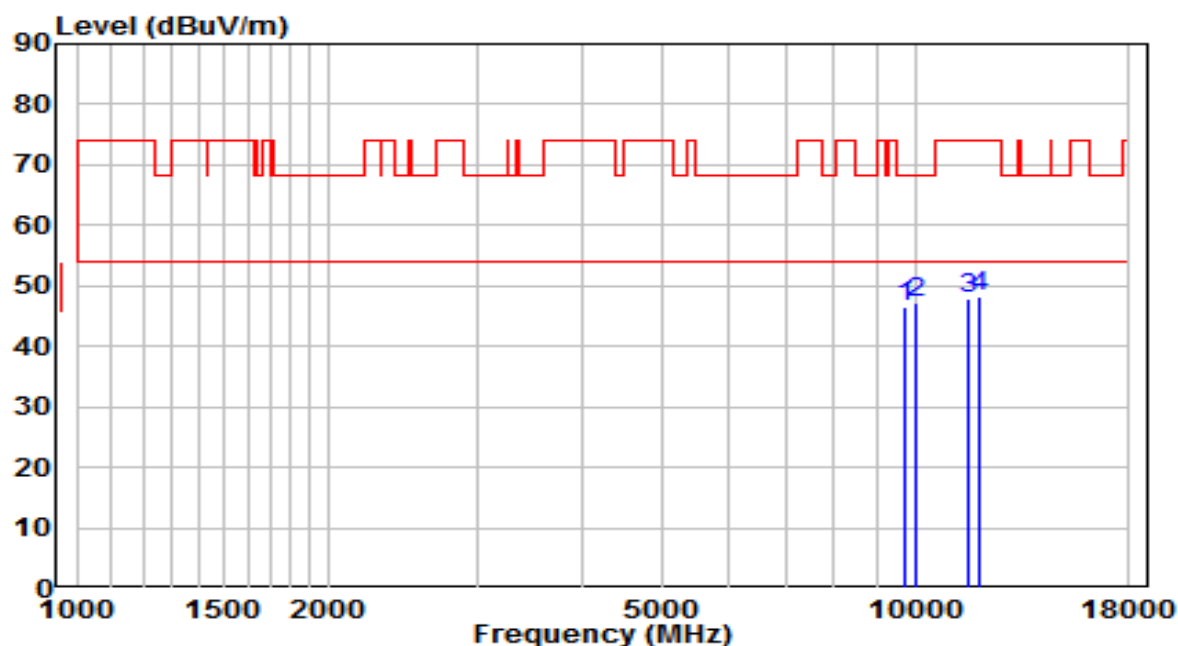


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.32	14.35	46.66	-21.54	68.20	Peak
2	* 10027.000	31.79	15.35	47.13	-21.07	68.20	Peak
3	11548.500	29.91	18.03	47.93	-26.07	74.00	Peak
4	11888.500	30.23	17.87	48.10	-25.90	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5550MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

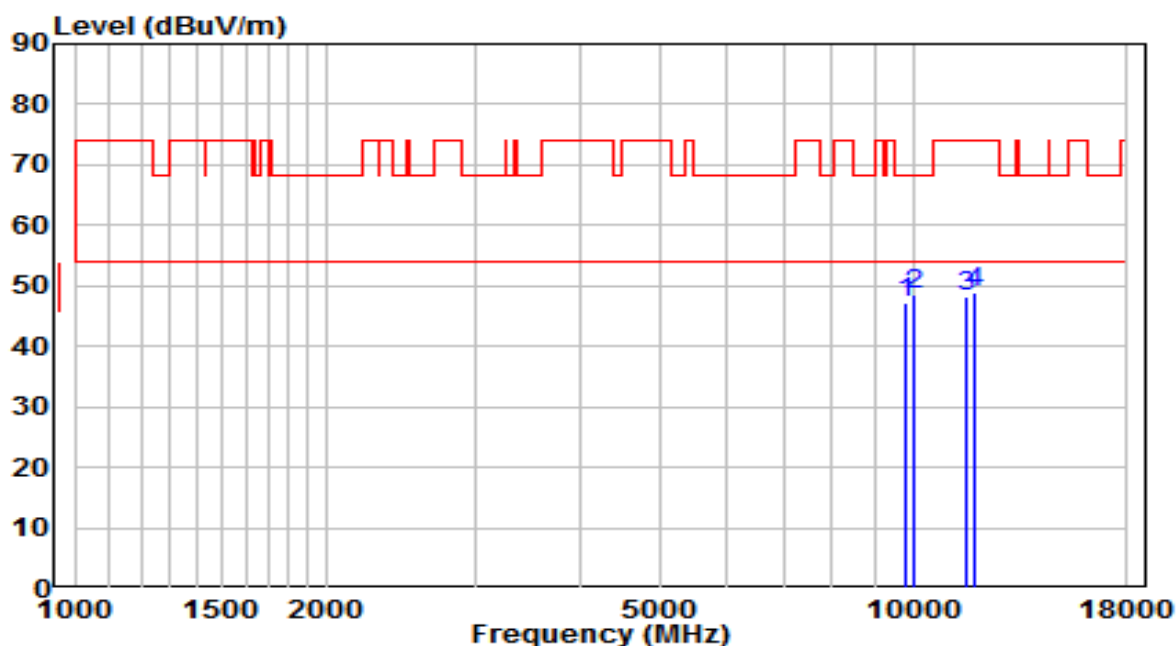


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9772.000	32.81	14.51	47.32	-20.88	68.20	Peak
2	* 10001.500	33.19	15.26	48.45	-19.75	68.20	Peak
3	11540.000	30.30	18.03	48.33	-25.67	74.00	Peak
4	11829.000	30.88	17.90	48.78	-25.22	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

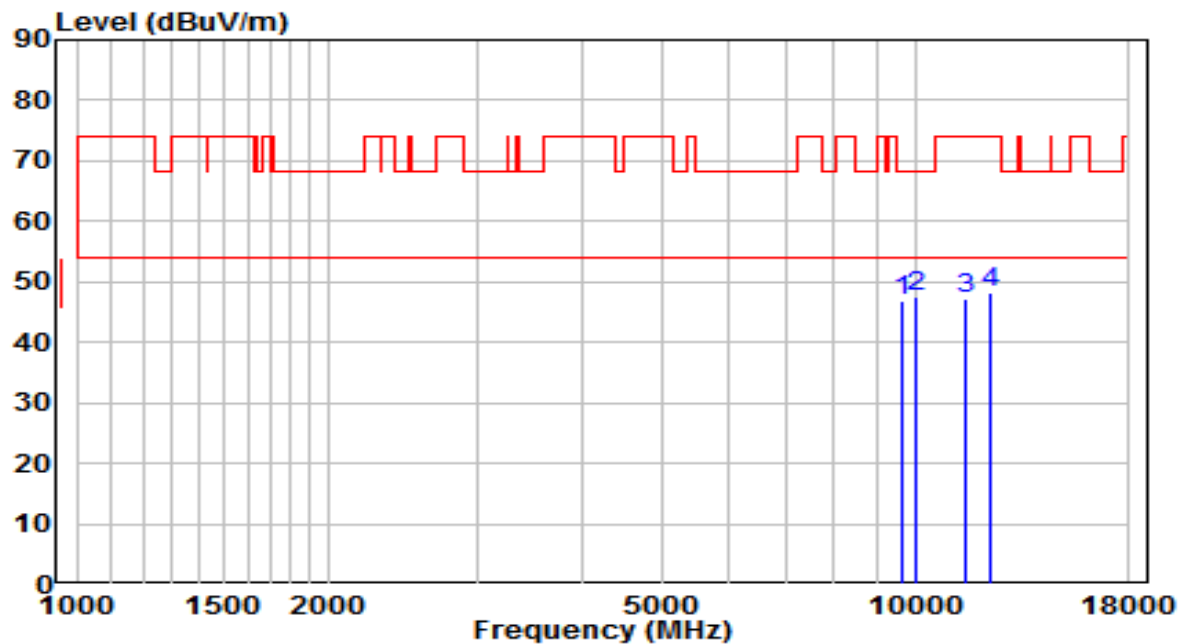


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	32.94	14.07	47.00	-21.20	68.20	Peak
2	* 10010.000	32.23	15.29	47.52	-20.68	68.20	Peak
3	11497.500	29.14	18.04	47.18	-26.82	74.00	Peak
4	12288.000	30.33	17.81	48.14	-25.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

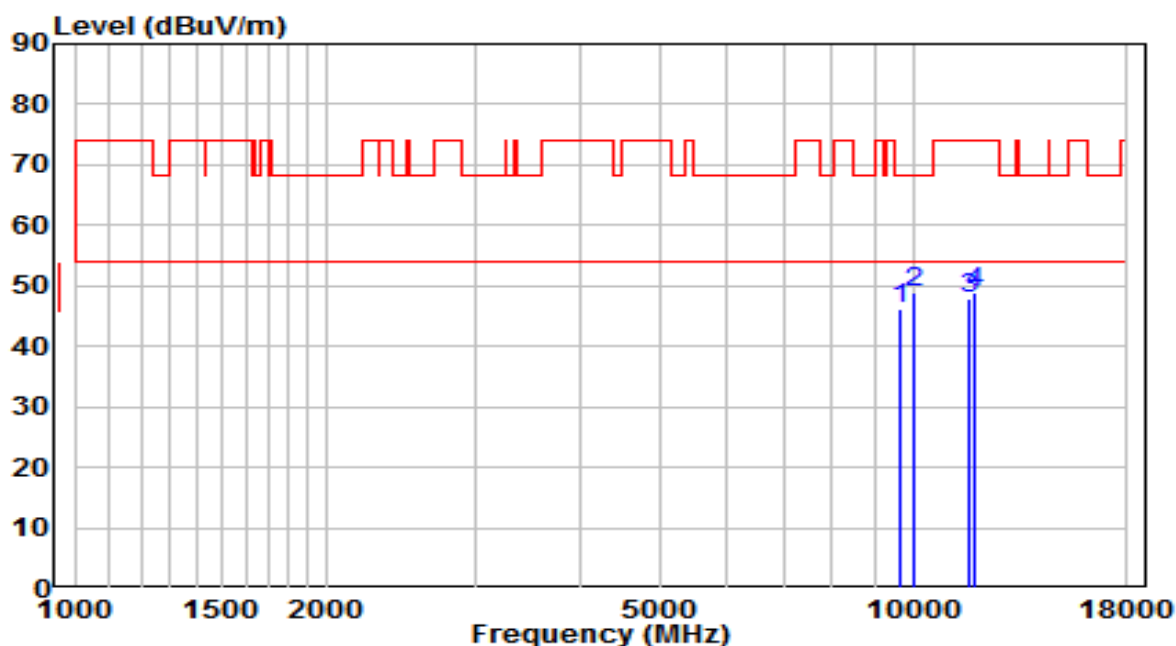


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9627.500	32.30	14.04	46.33	-21.87	68.20	Peak
2	* 10001.500	33.71	15.26	48.97	-19.23	68.20	Peak
3	11650.500	29.99	17.98	47.98	-26.02	74.00	Peak
4	11820.500	31.06	17.90	48.96	-25.04	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5710MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

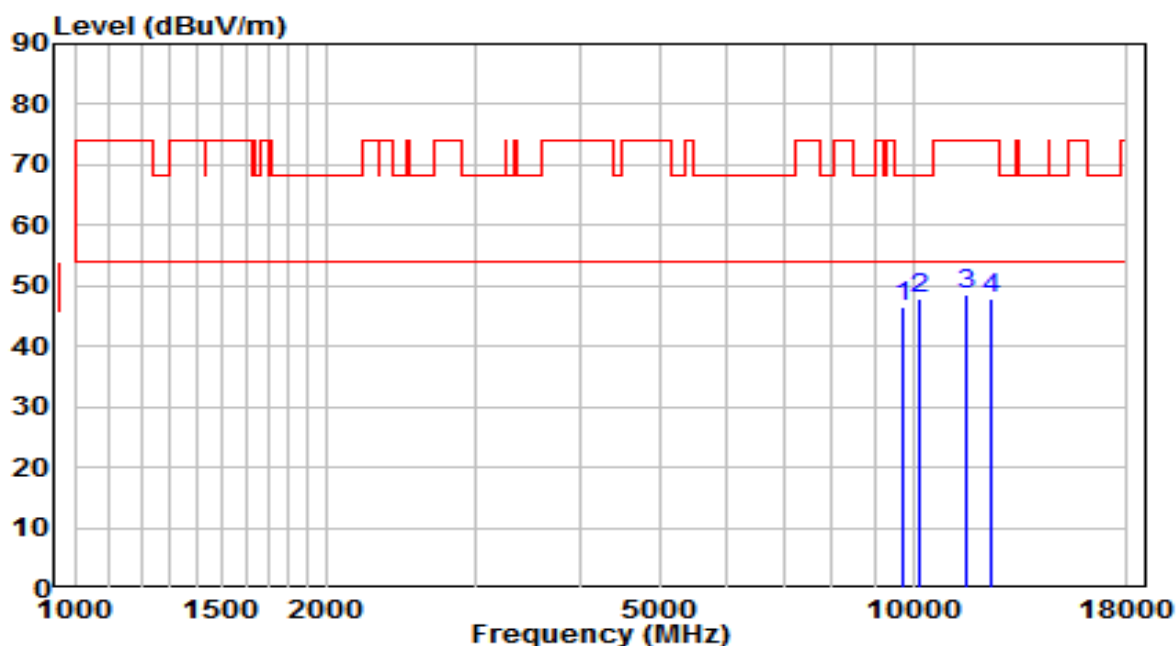


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.28	14.35	46.63	-21.57	68.20	Peak
2	* 10163.000	32.05	15.78	47.84	-20.36	68.20	Peak
3	11548.500	30.40	18.03	48.43	-25.57	74.00	Peak
4	12356.000	30.02	17.81	47.83	-26.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5710MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

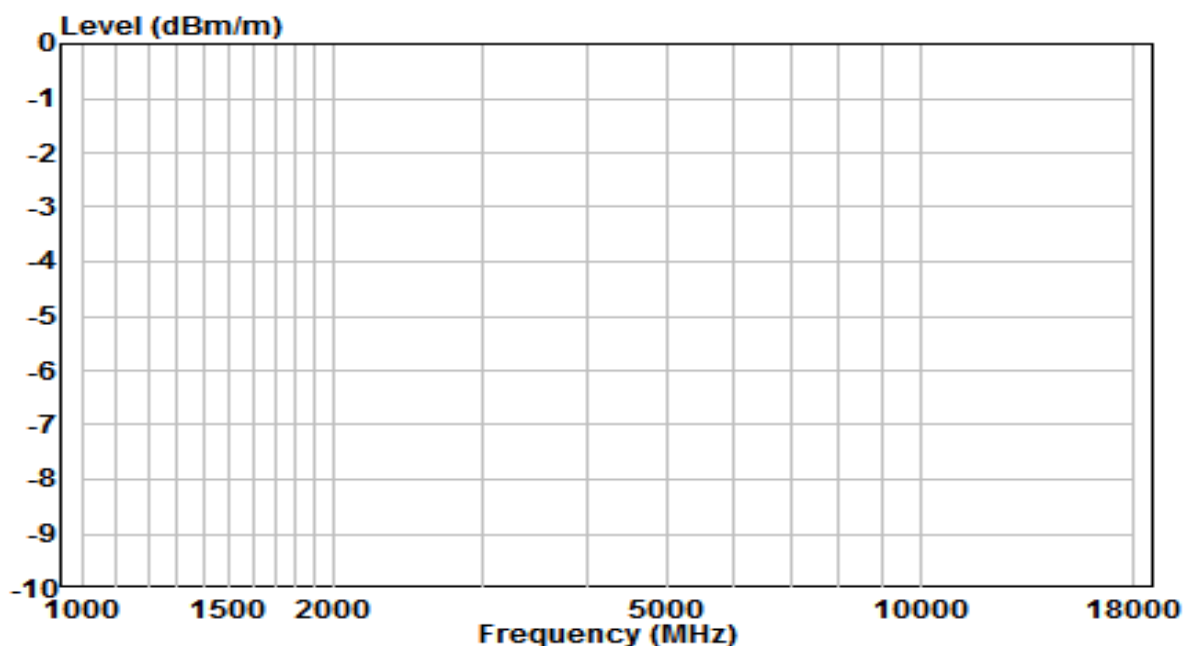


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	-74.26	14.07	-60.20	-21.40	-38.80	Peak
2	* 10001.500	-73.29	15.26	-58.02	-19.22	-38.80	Peak
3	11565.500	-77.83	18.02	-59.81	-26.81	-33.00	Peak
4	12407.000	-77.05	17.81	-59.24	-26.24	-33.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

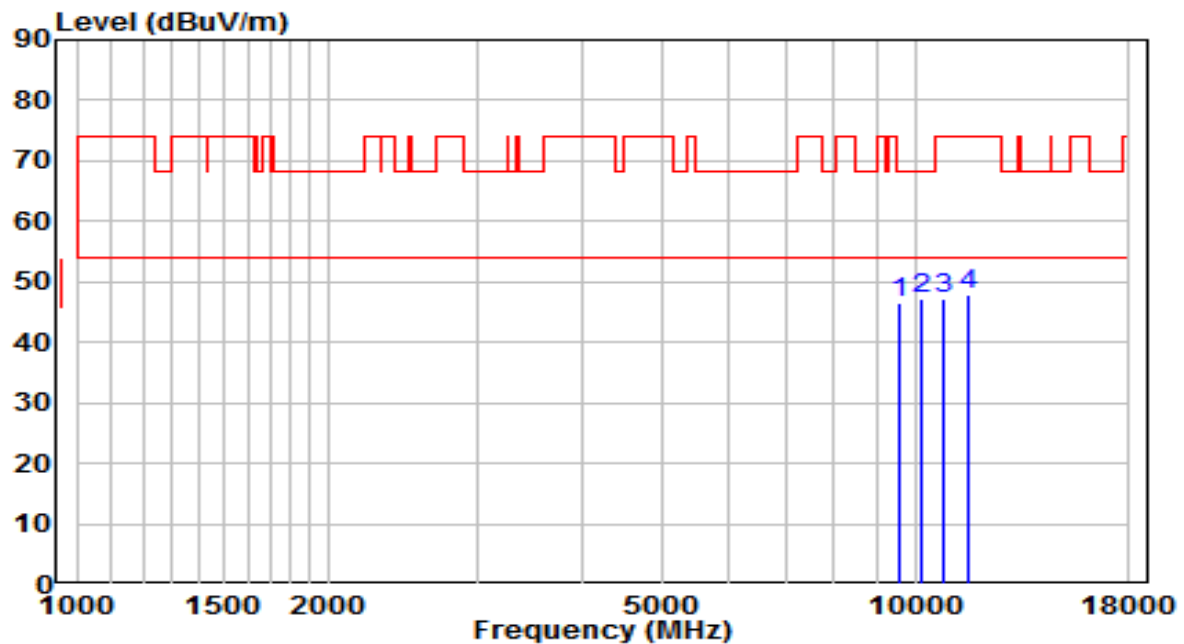


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9610.500	32.57	13.98	46.56	-21.64	68.20	Peak
2	* 10163.000	31.43	15.78	47.22	-20.98	68.20	Peak
3	10843.000	29.75	17.36	47.10	-26.90	74.00	Peak
4	11531.500	29.68	18.04	47.72	-26.28	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

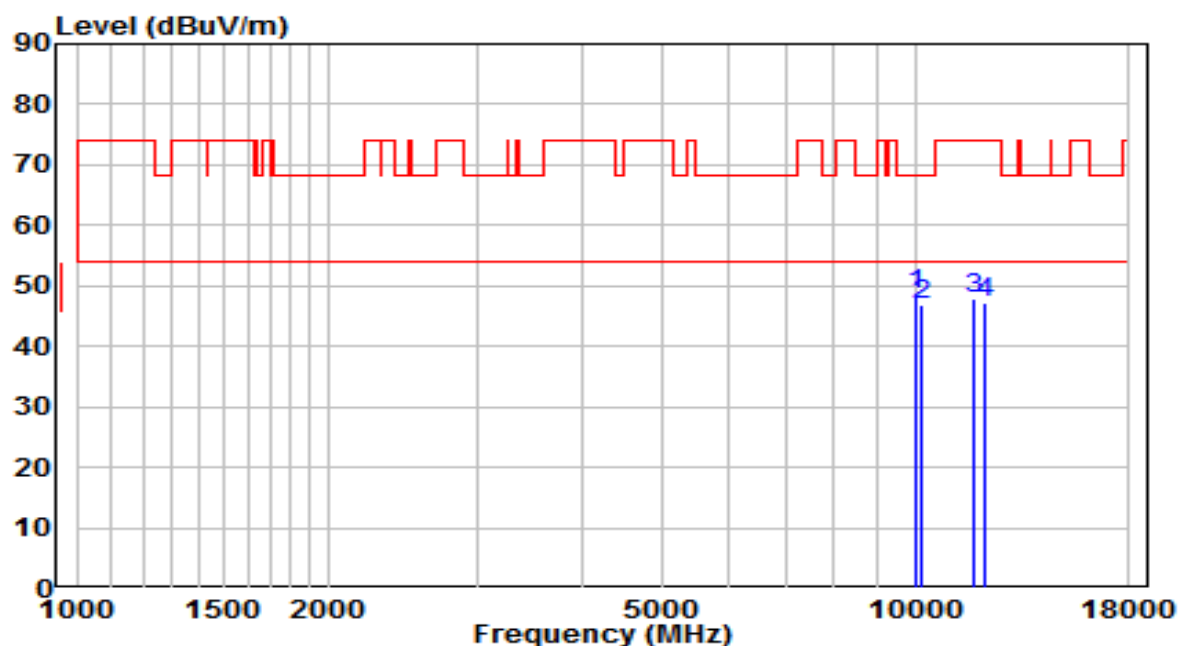


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.40	15.26	48.66	-19.54	68.20	Peak
2		10163.000	31.19	15.78	46.97	-21.23	68.20	Peak
3		11710.000	30.02	17.95	47.97	-26.03	74.00	Peak
4		12101.000	29.36	17.82	47.18	-26.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

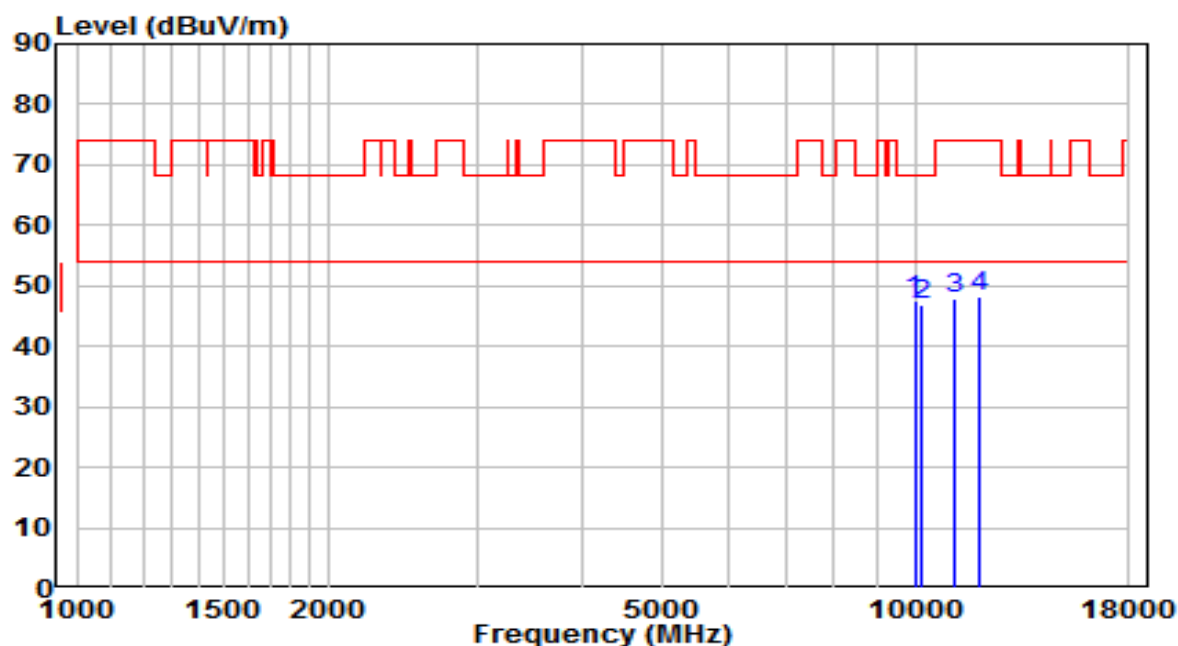


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9984.500	32.26	15.21	47.47	-20.73	68.20	Peak
2		10188.500	31.01	15.87	46.88	-21.32	68.20	Peak
3		11174.500	30.22	17.74	47.97	-26.03	74.00	Peak
4		11897.000	30.31	17.87	48.17	-25.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

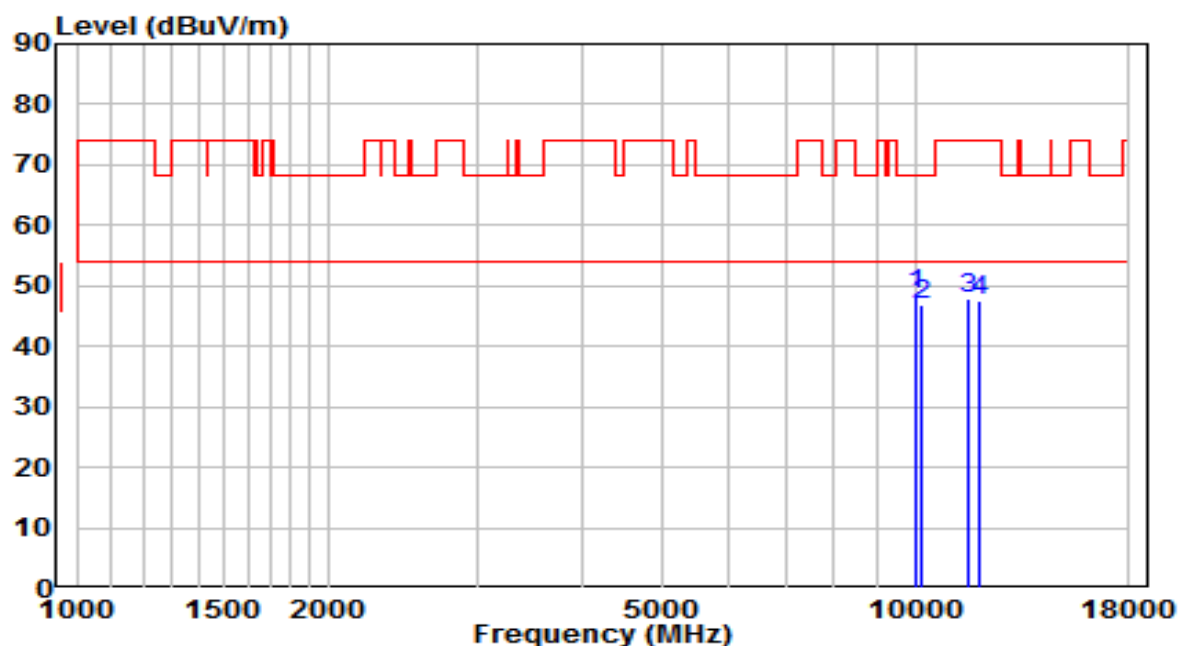


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.26	15.26	48.52	-19.68	68.20	Peak
2		10163.000	31.09	15.78	46.87	-21.33	68.20	Peak
3		11608.000	30.02	18.00	48.02	-25.98	74.00	Peak
4		11948.000	29.74	17.84	47.59	-26.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

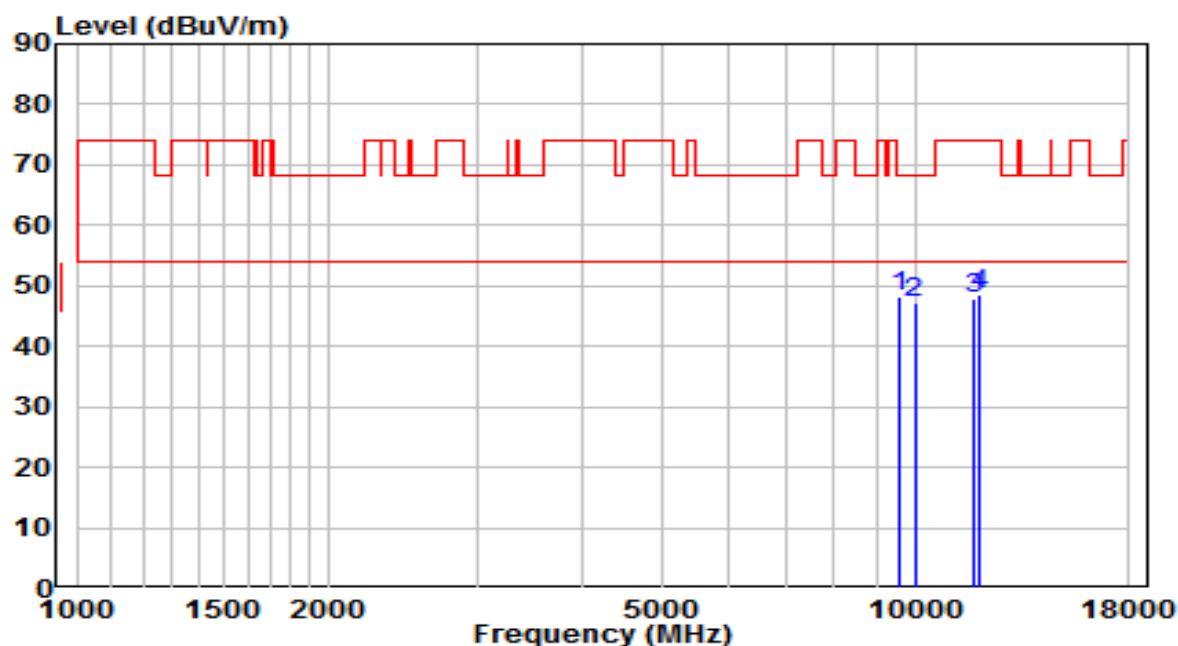


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9551.000	34.34	13.79	48.12	-20.08	68.20	Peak
2		9984.500	31.90	15.21	47.11	-21.09	68.20	Peak
3		11710.000	30.07	17.95	48.03	-25.97	74.00	Peak
4		11905.500	30.65	17.86	48.52	-25.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

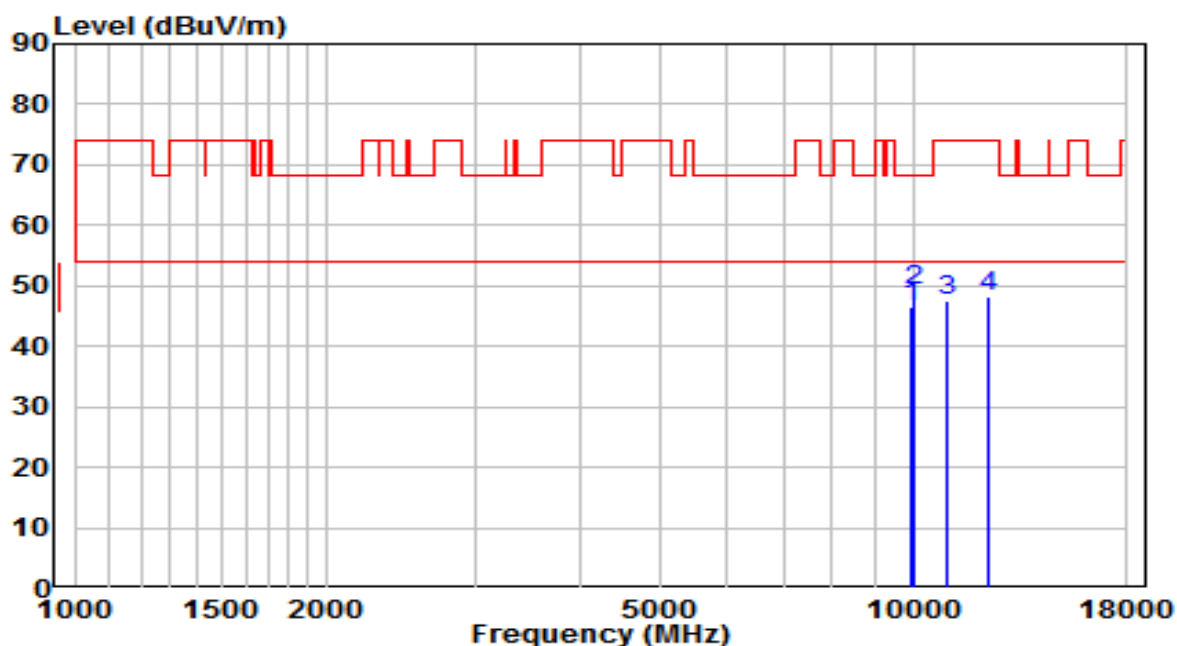


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9916.500	31.64	14.99	46.63	-21.57	68.20	Peak
2	* 10001.500	33.87	15.26	49.13	-19.07	68.20	Peak
3	10996.000	30.05	17.57	47.63	-26.37	74.00	Peak
4	12296.500	30.31	17.81	48.12	-25.88	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

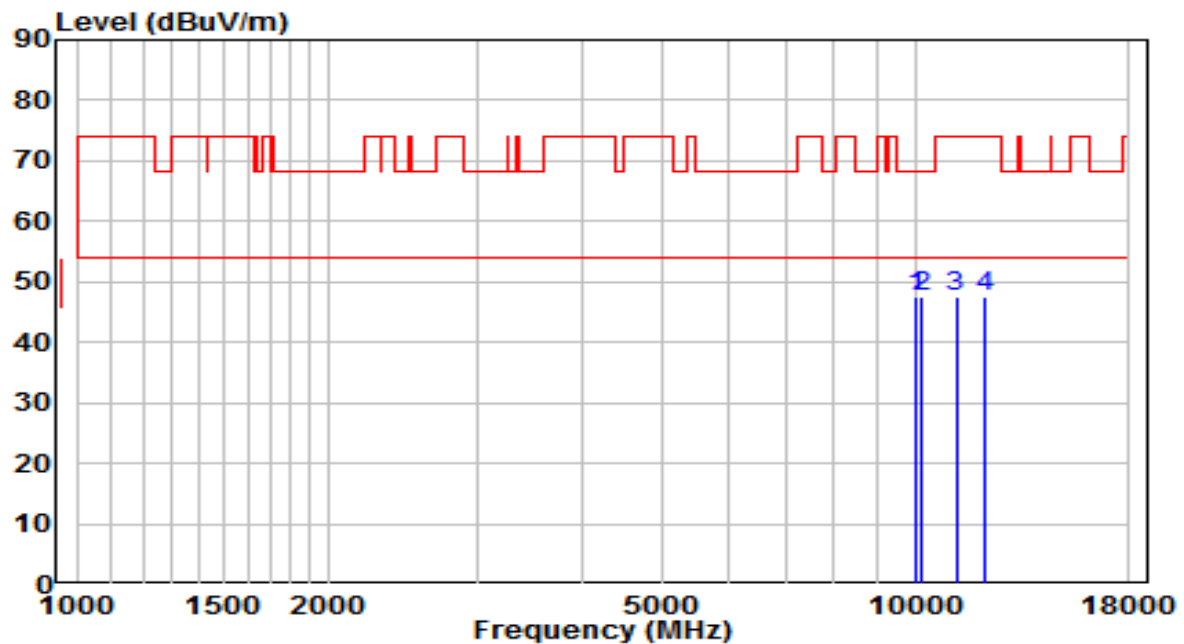


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9993.000	32.26	15.24	47.50	-20.70	68.20	Peak
2		10171.500	31.60	15.81	47.41	-20.79	68.20	Peak
3		11183.000	29.68	17.75	47.43	-26.57	74.00	Peak
4		12101.000	29.62	17.82	47.44	-26.56	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

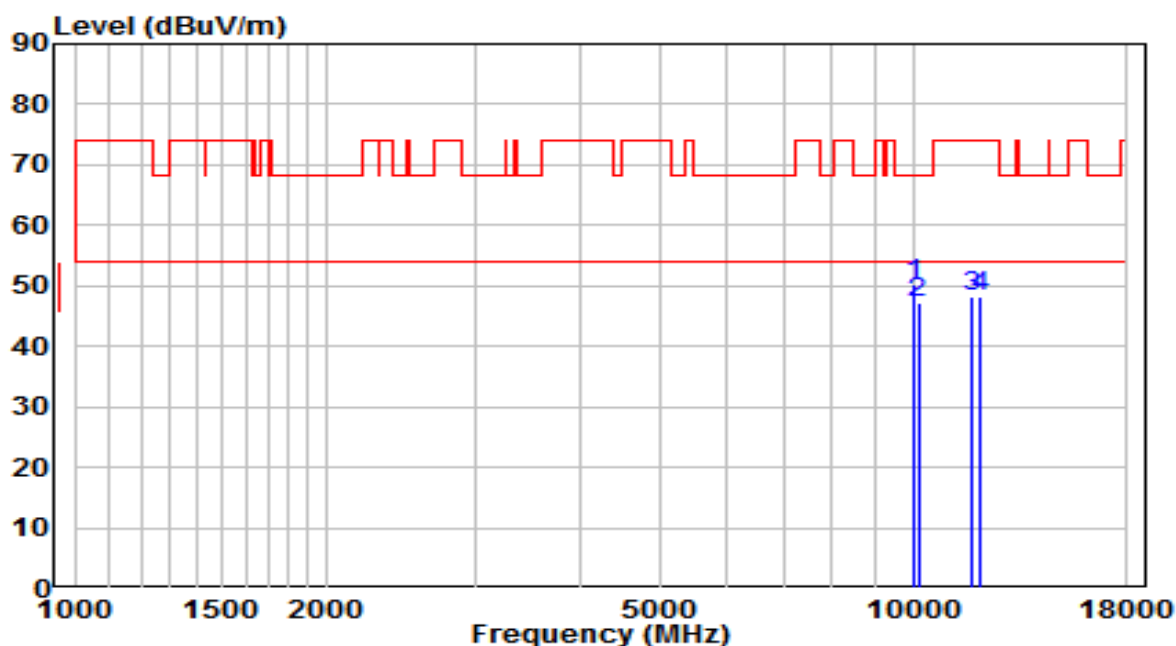


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	35.03	15.26	50.29	-17.91	68.20	Peak
2		10137.500	31.45	15.70	47.16	-21.04	68.20	Peak
3		11718.500	30.36	17.95	48.31	-25.69	74.00	Peak
4		12041.500	30.33	17.82	48.15	-25.85	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

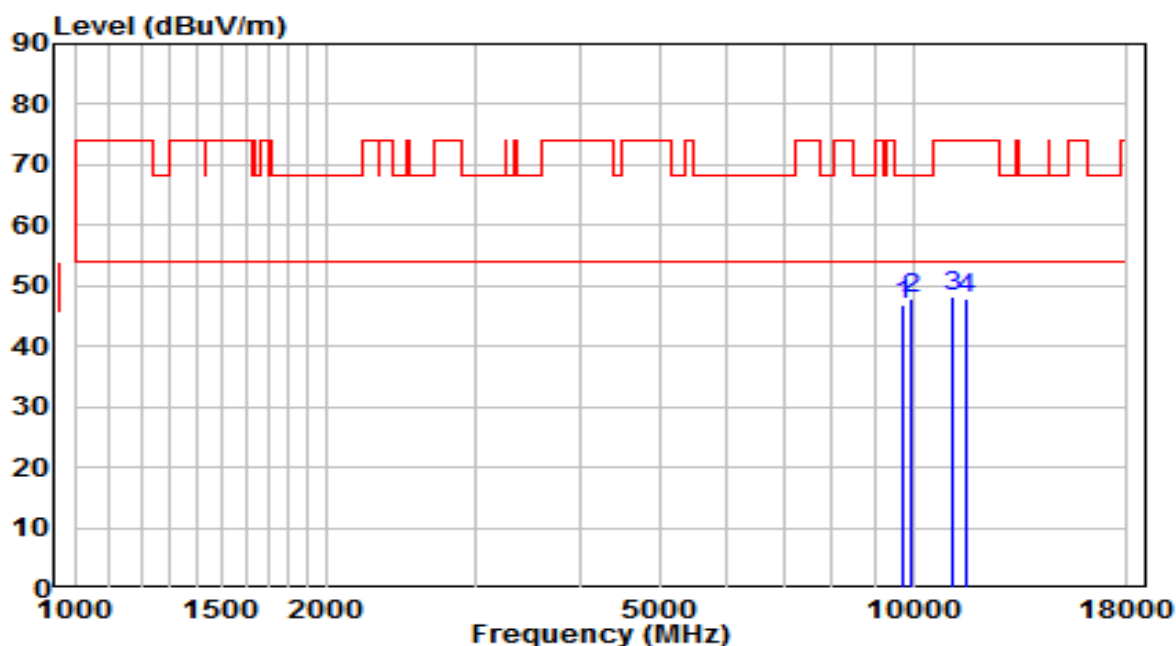


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9746.500	32.52	14.43	46.95	-21.25	68.20	Peak
2	* 9976.000	32.54	15.18	47.72	-20.48	68.20	Peak
3	11149.000	30.47	17.72	48.19	-25.81	74.00	Peak
4	11565.500	30.03	18.02	48.05	-25.95	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

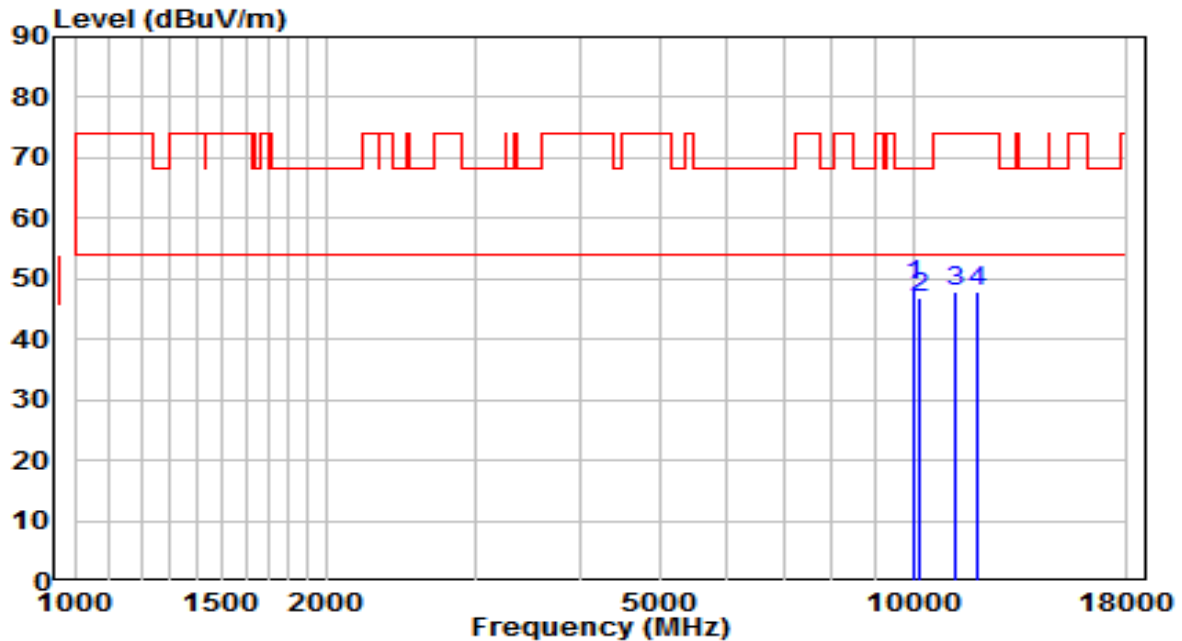


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.71	15.26	48.98	-19.22	68.20	Peak
2		10188.500	31.03	15.87	46.89	-21.31	68.20	Peak
3		11208.500	30.00	17.78	47.77	-26.23	74.00	Peak
4		11888.500	30.02	17.87	47.89	-26.11	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5690MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

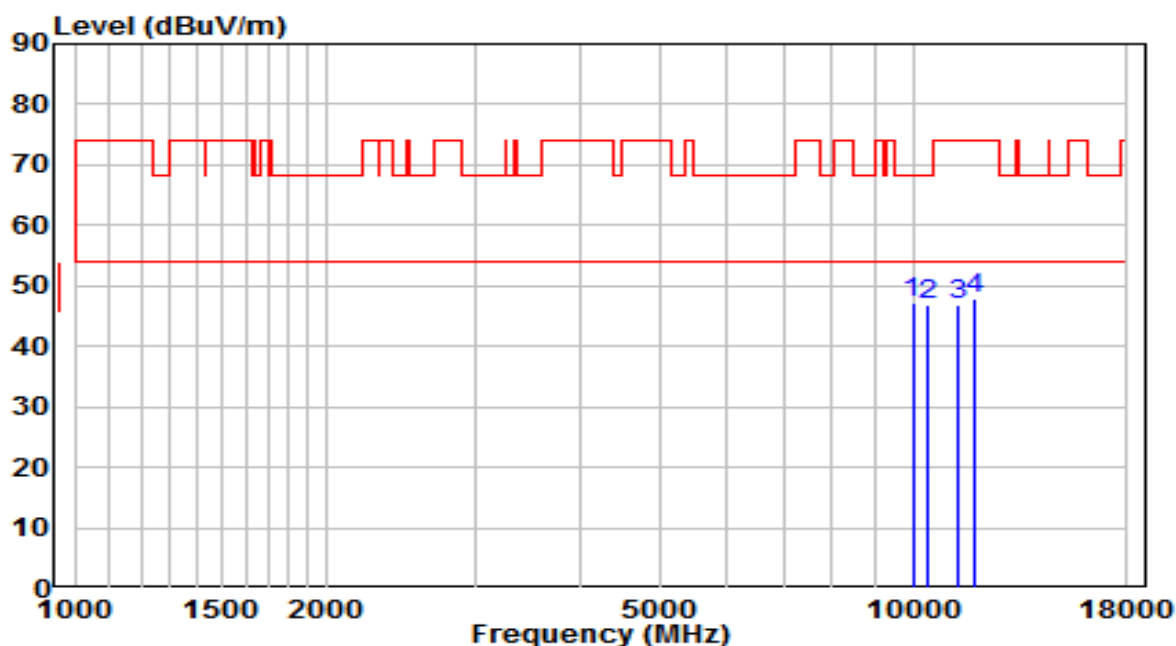


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9984.500	31.85	15.21	47.06	-21.14	68.20	Peak
2		10426.500	30.17	16.63	46.80	-21.40	68.20	Peak
3		11285.000	29.05	17.85	46.90	-27.10	74.00	Peak
4		11846.000	29.99	17.89	47.88	-26.12	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5690MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

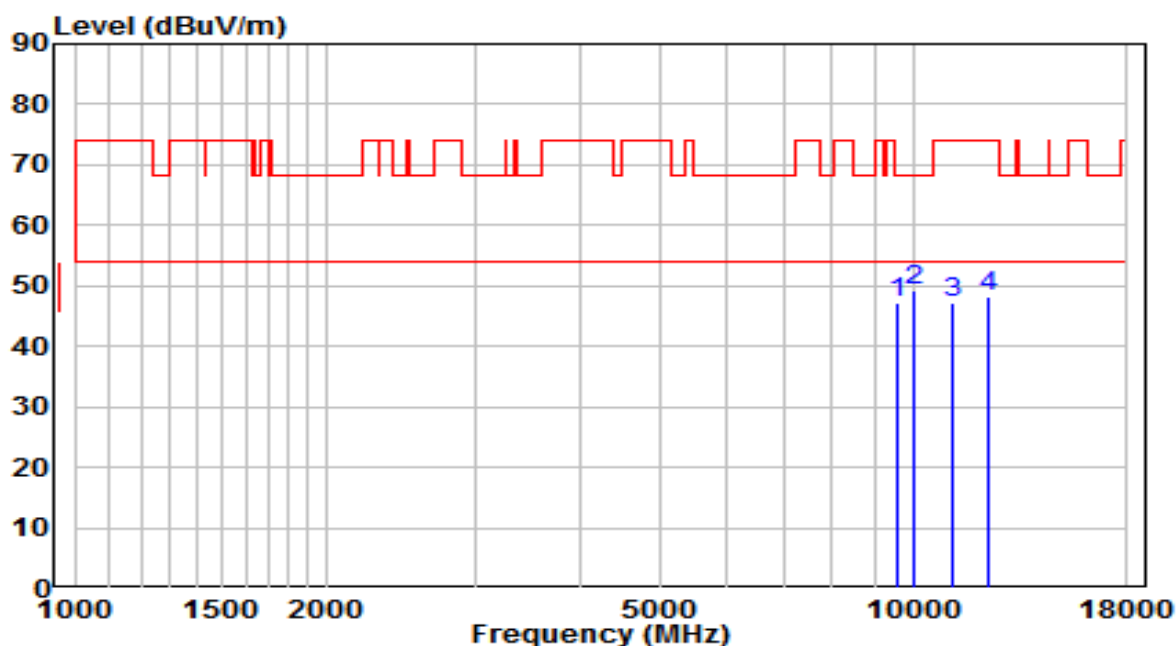


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9610.500	33.31	13.98	47.30	-20.90	68.20	Peak
2	* 10001.500	33.92	15.26	49.18	-19.02	68.20	Peak
3	11174.500	29.58	17.74	47.32	-26.68	74.00	Peak
4	12288.000	30.33	17.81	48.14	-25.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

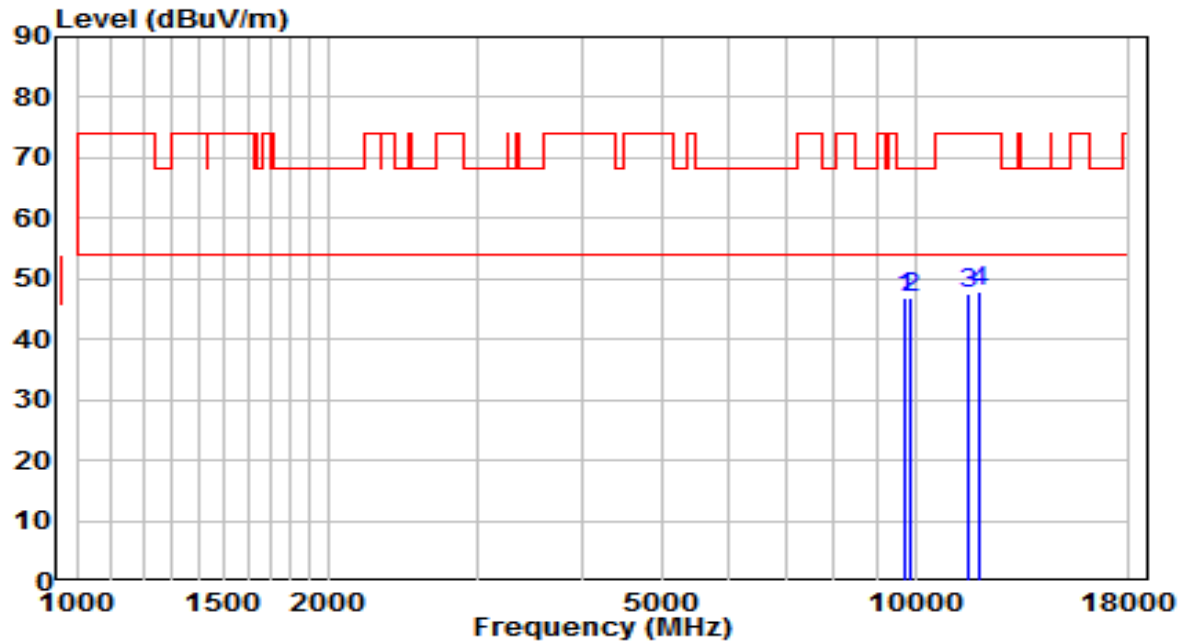


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9729.500	32.48	14.37	46.85	-21.35	68.20	Peak
2		9899.500	31.91	14.93	46.84	-21.36	68.20	Peak
3		11548.500	29.65	18.03	47.68	-26.32	74.00	Peak
4		11888.500	29.93	17.87	47.80	-26.20	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

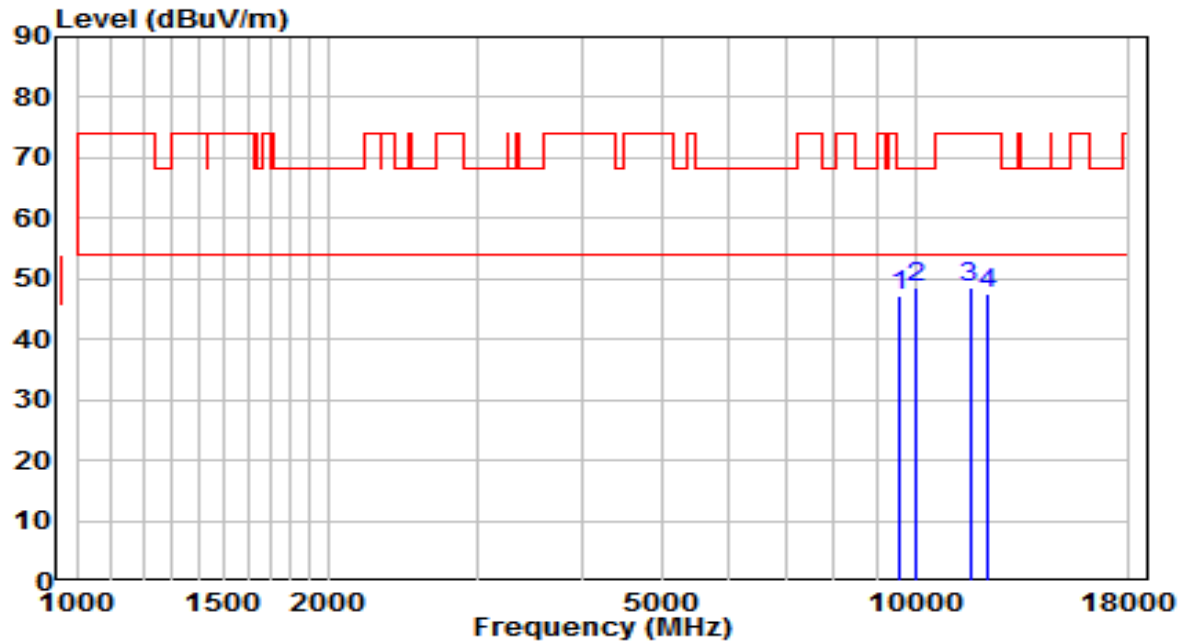


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9559.500	33.33	13.82	47.15	-21.05	68.20	Peak
2	* 10001.500	33.18	15.26	48.44	-19.76	68.20	Peak
3	11616.500	30.46	18.00	48.46	-25.54	74.00	Peak
4	12169.000	29.84	17.82	47.66	-26.34	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

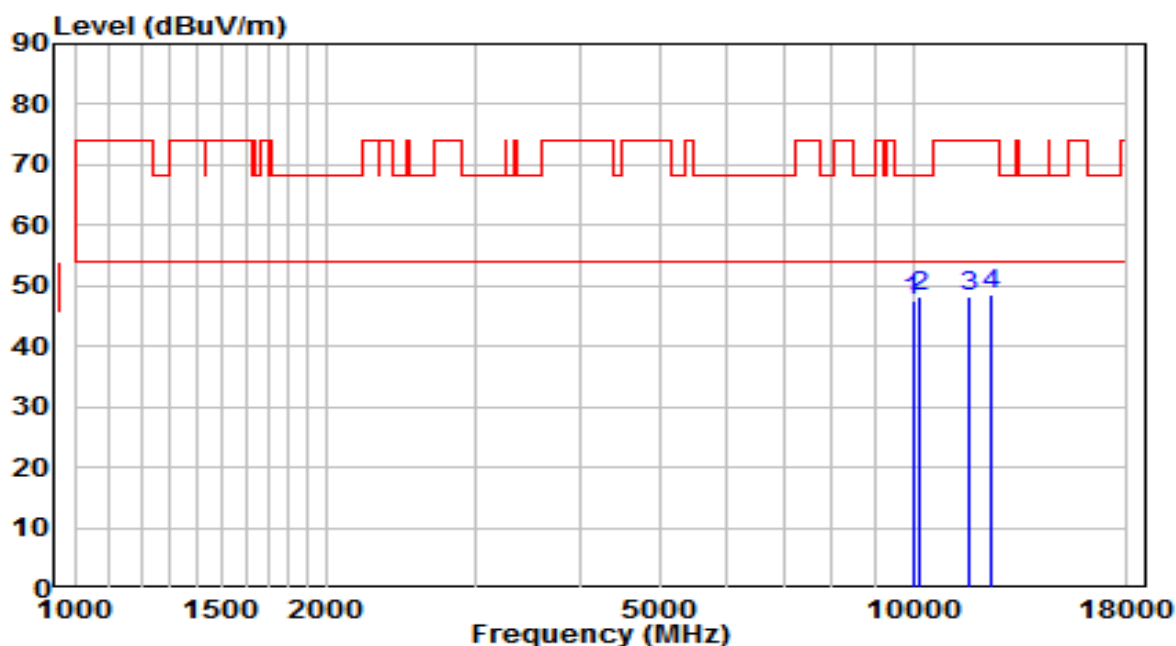


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9984.500	32.20	15.21	47.41	-20.79	68.20	Peak
2	* 10171.500	32.28	15.81	48.09	-20.11	68.20	Peak
3	11650.500	30.27	17.98	48.25	-25.75	74.00	Peak
4	12415.500	30.90	17.81	48.71	-25.29	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	22.6°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	110V/60Hz

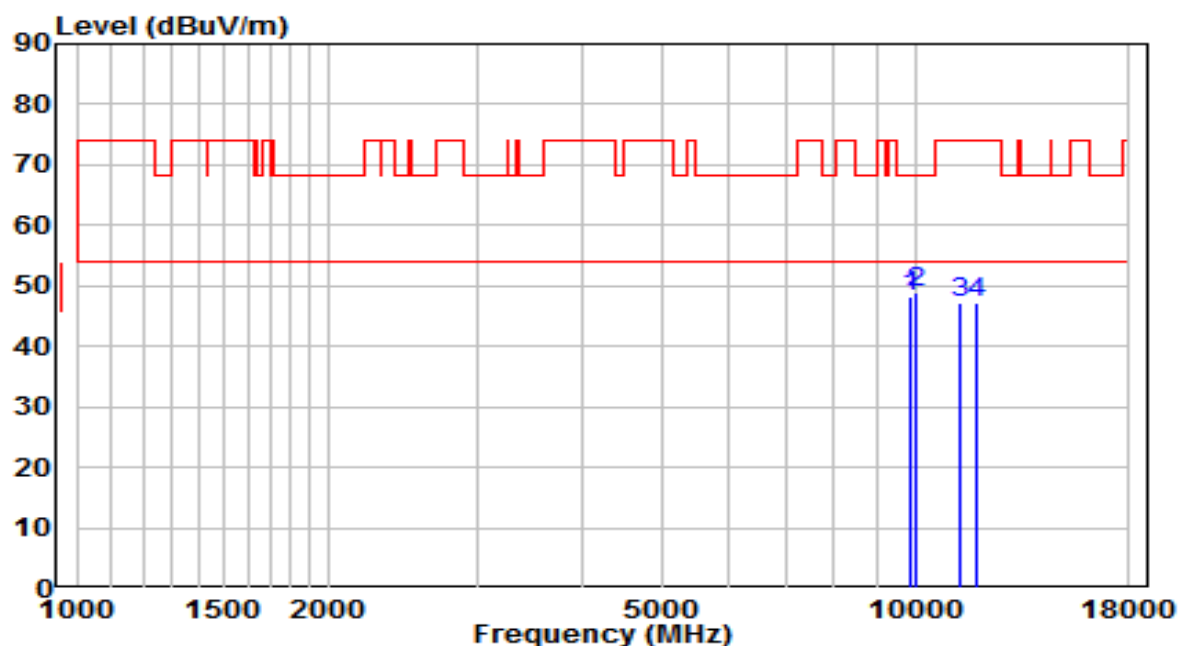


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9882.500	33.26	14.87	48.13	-20.07	68.20	Peak
2	* 10001.500	33.70	15.26	48.97	-19.23	68.20	Peak
3	11310.500	29.22	17.87	47.09	-26.91	74.00	Peak
4	11863.000	29.27	17.88	47.15	-26.85	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)..
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

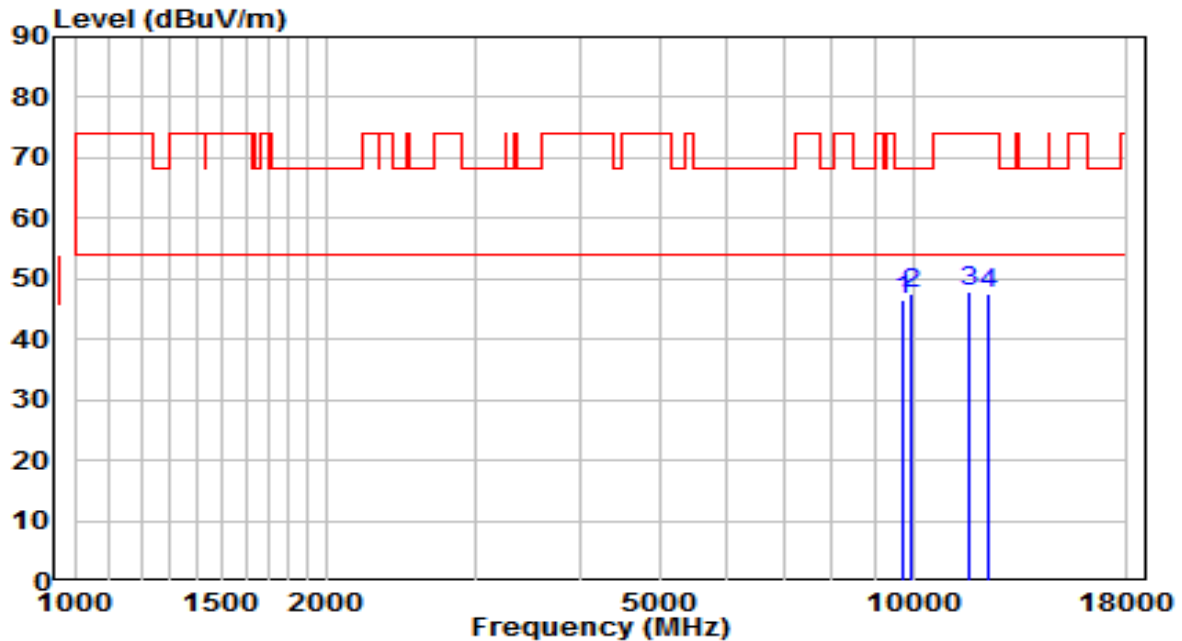


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.31	14.35	46.66	-21.54	68.20	Peak
2	* 9976.000	32.33	15.18	47.52	-20.68	68.20	Peak
3	11667.500	29.99	17.97	47.96	-26.04	74.00	Peak
4	12288.000	29.86	17.81	47.68	-26.32	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

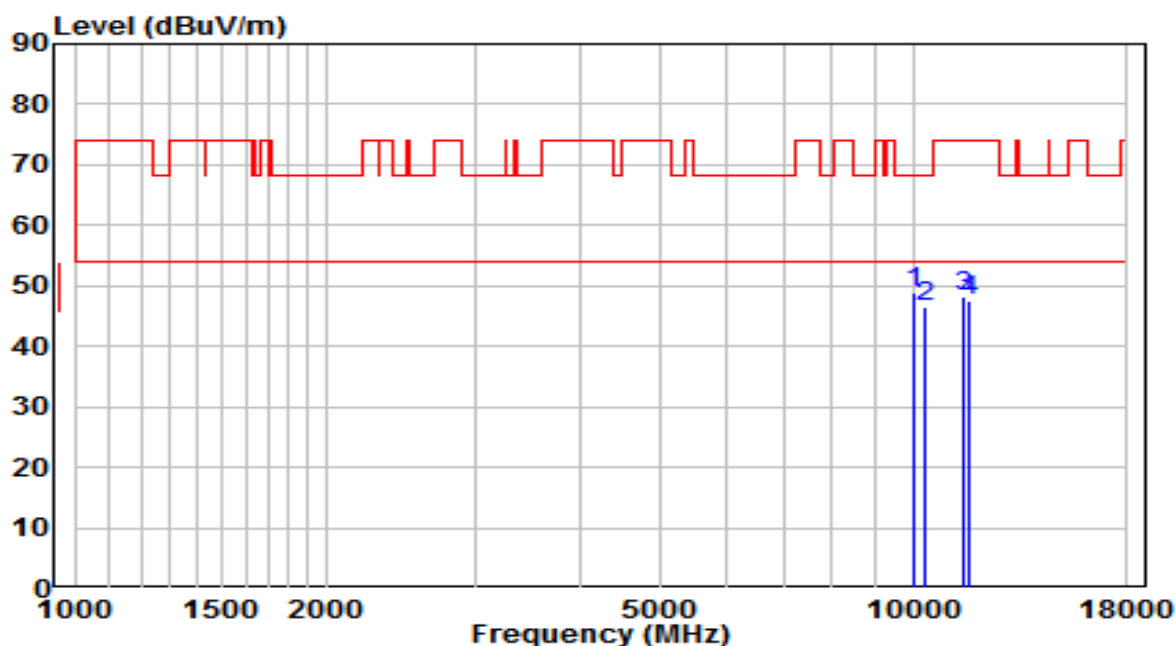


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.49	15.26	48.75	-19.45	68.20	Peak
2		10324.500	30.16	16.31	46.47	-21.73	68.20	Peak
3		11489.000	30.29	18.04	48.33	-25.67	74.00	Peak
4		11667.500	29.65	17.97	47.62	-26.38	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

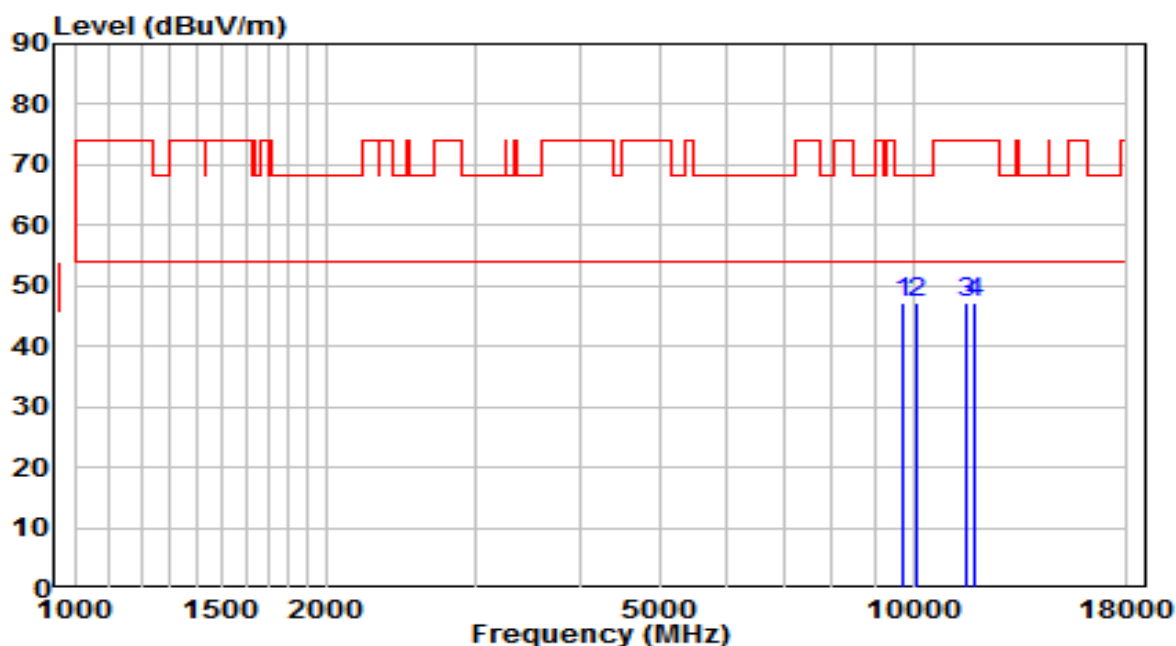


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.76	14.35	47.10	-21.10	68.20	Peak
2	* 10112.000	31.58	15.62	47.20	-21.00	68.20	Peak
3	11540.000	29.02	18.03	47.06	-26.94	74.00	Peak
4	11829.000	29.20	17.90	47.10	-26.90	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

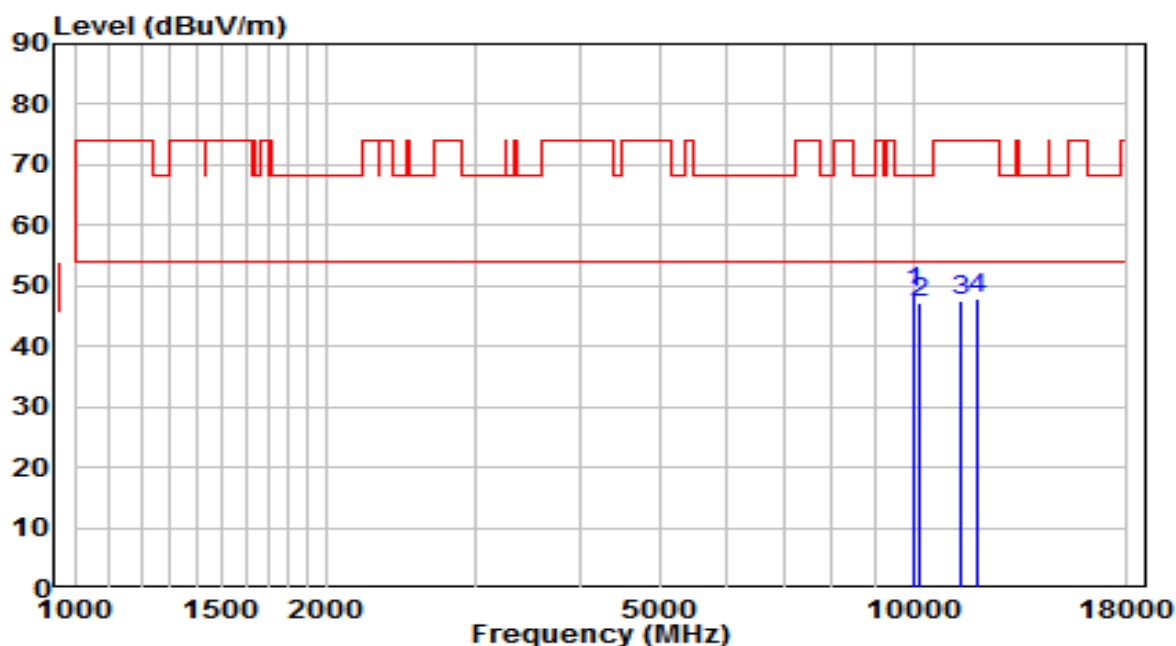


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.77	15.26	49.03	-19.17	68.20	Peak
2		10154.500	31.37	15.76	47.12	-21.08	68.20	Peak
3		11429.500	29.54	17.98	47.52	-26.48	74.00	Peak
4		11897.000	29.99	17.87	47.86	-26.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

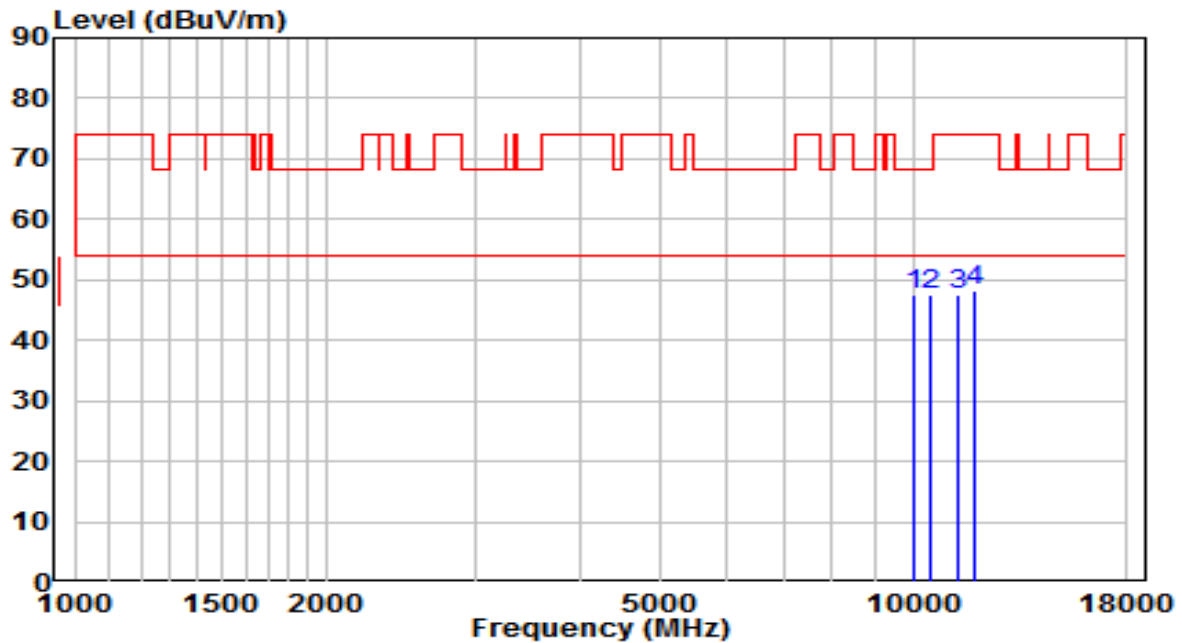


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10001.500	32.20	15.26	47.47	-20.73	68.20	Peak
2	* 10452.000	30.84	16.72	47.55	-20.65	68.20	Peak
3	11353.000	29.68	17.91	47.59	-26.41	74.00	Peak
4	11820.500	30.39	17.90	48.29	-25.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

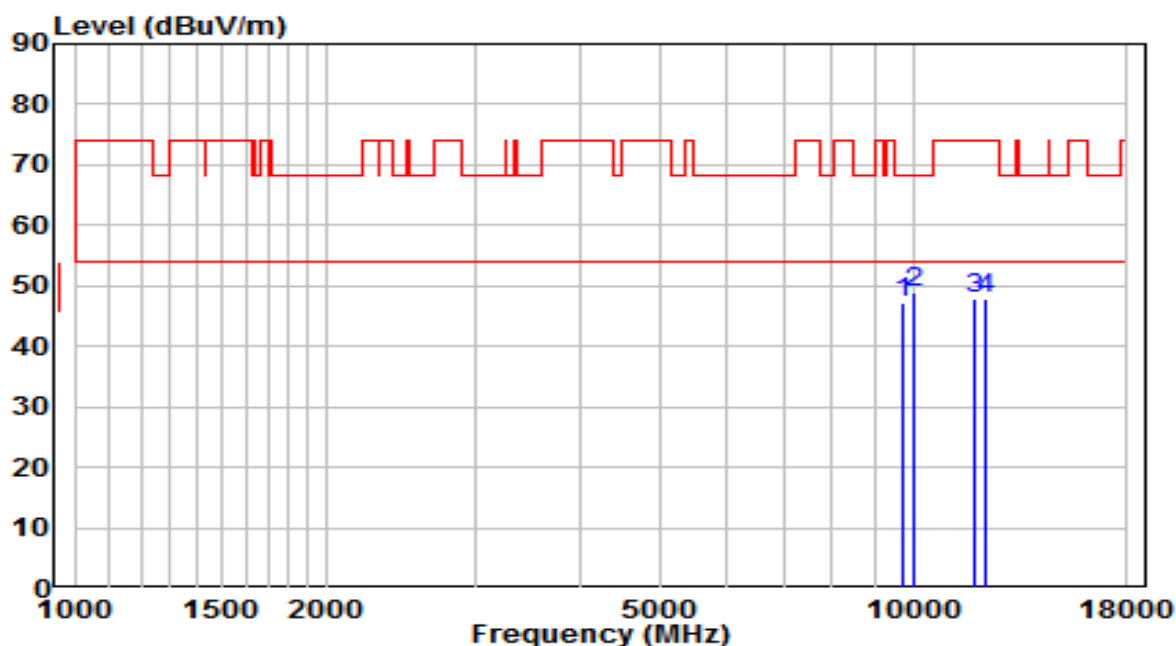


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9695.500	32.80	14.26	47.06	-21.14	68.20	Peak
2	* 10001.500	33.48	15.26	48.75	-19.45	68.20	Peak
3	11820.500	30.14	17.90	48.05	-25.95	74.00	Peak
4	12203.000	30.11	17.81	47.93	-26.07	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5720MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

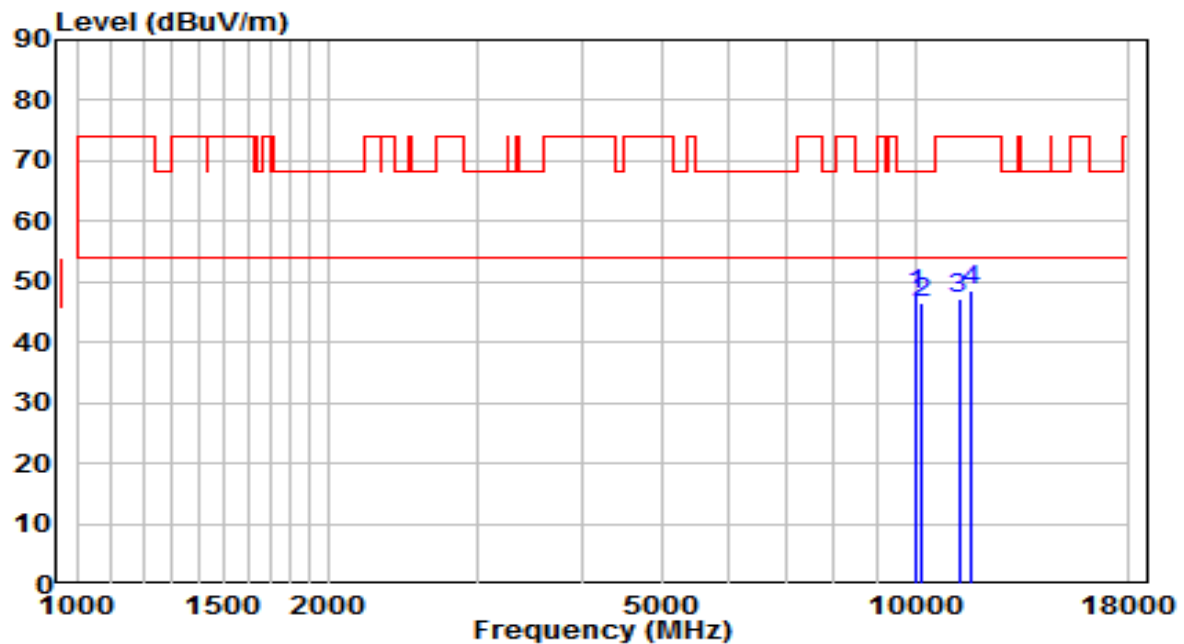


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10018.500	32.72	15.32	48.04	-20.16	68.20	Peak
2		10171.500	30.75	15.81	46.56	-21.64	68.20	Peak
3		11268.000	29.21	17.83	47.04	-26.96	74.00	Peak
4		11659.000	30.46	17.98	48.43	-25.57	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5720MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

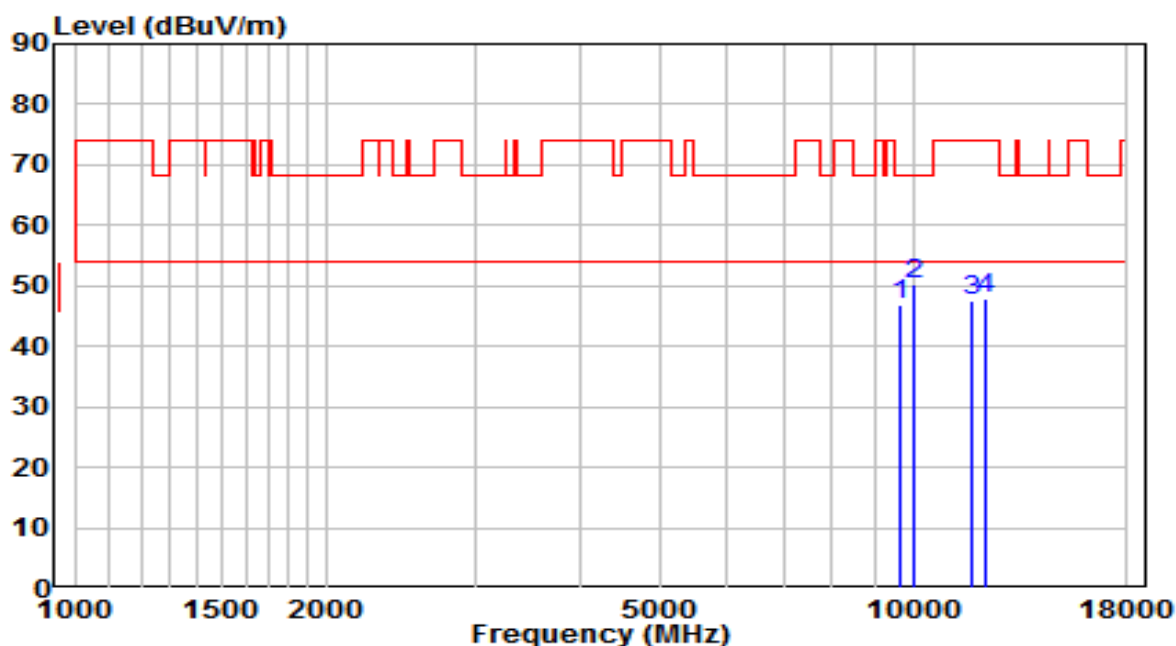


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	32.71	14.07	46.77	-21.43	68.20	Peak
2	* 10001.500	34.87	15.26	50.13	-18.07	68.20	Peak
3	11710.000	29.76	17.95	47.71	-26.29	74.00	Peak
4	12228.500	29.94	17.81	47.76	-26.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

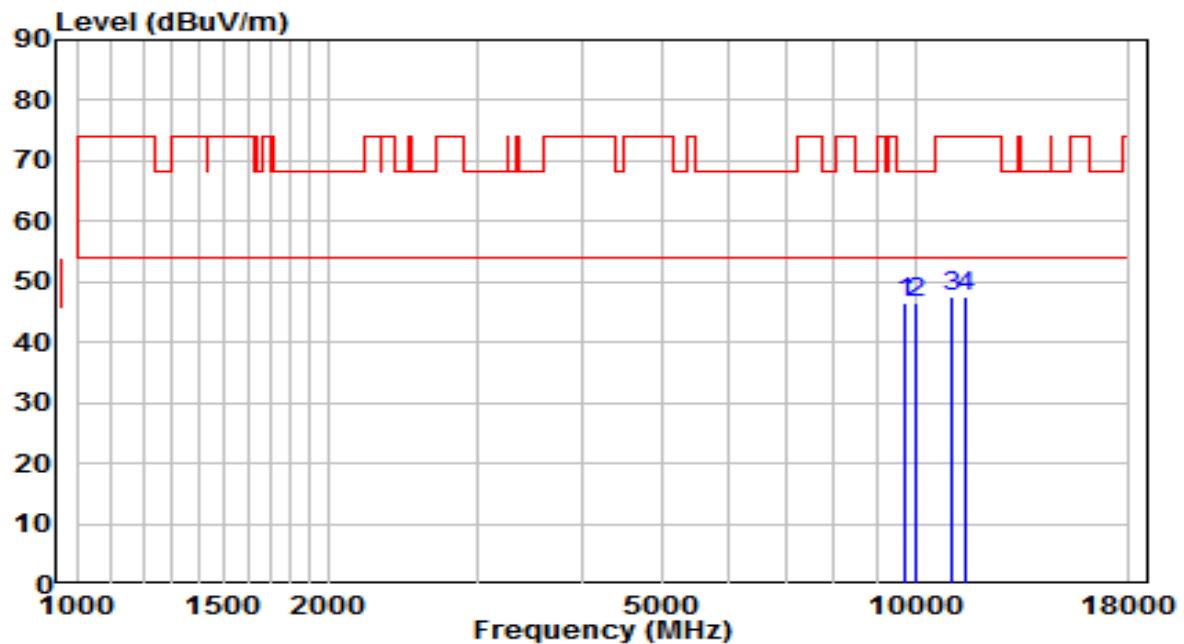


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9712.500	32.29	14.32	46.60	-21.60	68.20	Peak
2	* 10027.000	31.27	15.35	46.62	-21.58	68.20	Peak
3	11081.000	29.90	17.66	47.55	-26.45	74.00	Peak
4	11497.500	29.54	18.04	47.58	-26.42	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

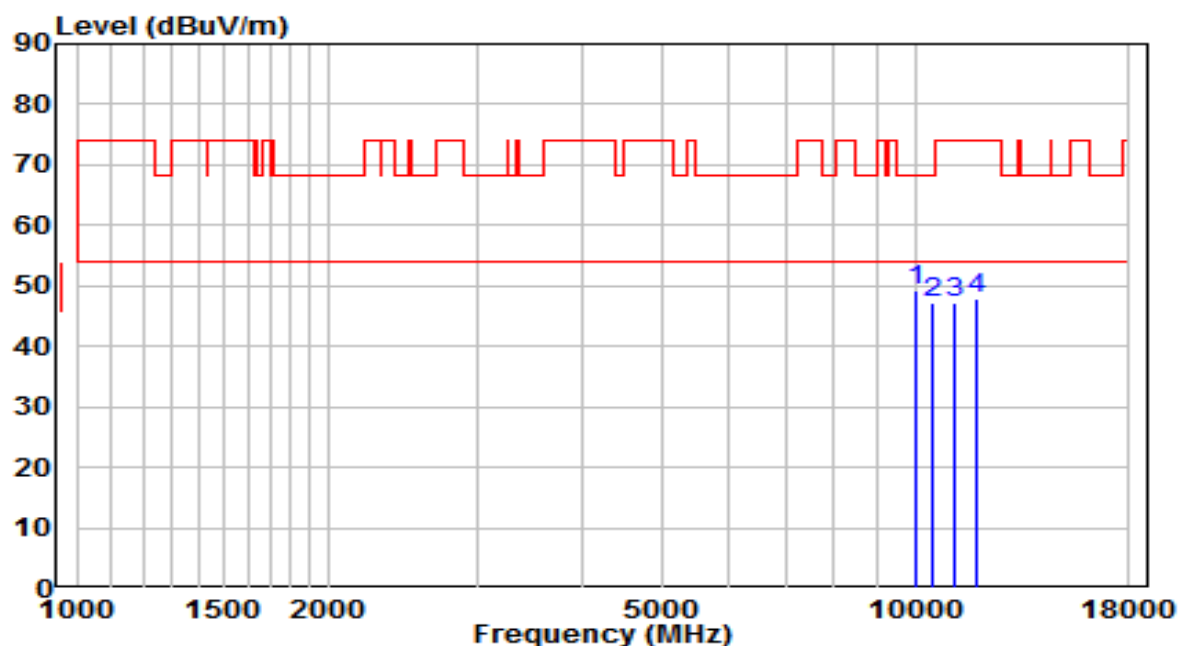


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	34.01	15.26	49.27	-18.93	68.20	Peak
2		10452.000	30.53	16.72	47.24	-20.96	68.20	Peak
3		11106.500	29.42	17.68	47.10	-26.90	74.00	Peak
4		11829.000	29.85	17.90	47.75	-26.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5550MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

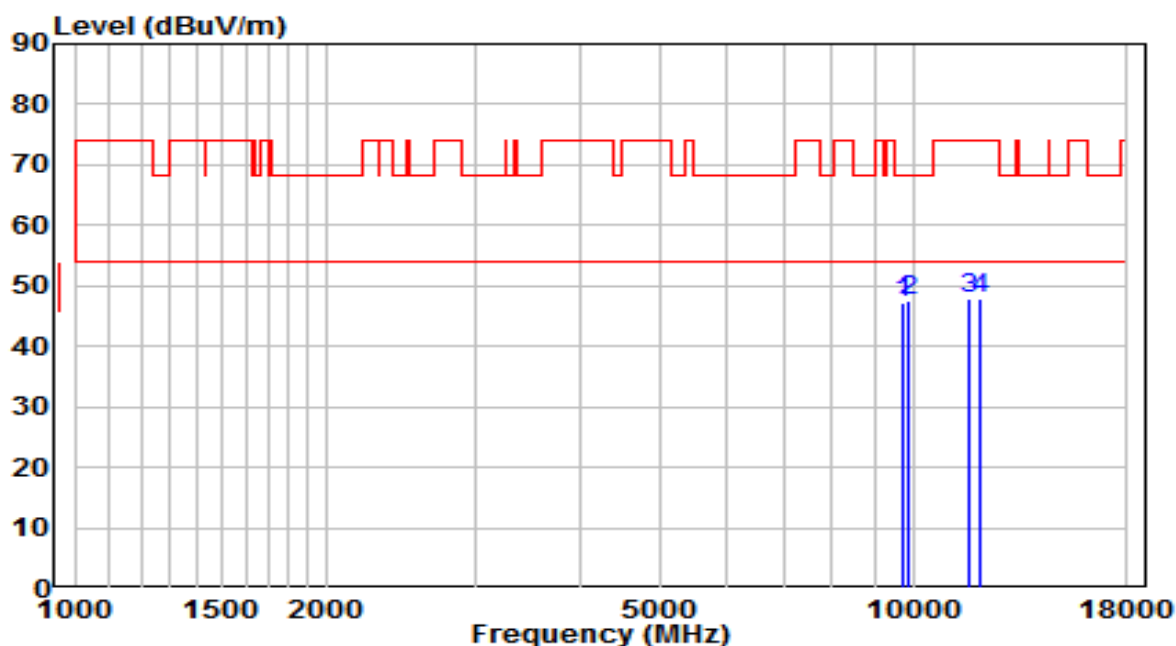


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9712.500	32.94	14.32	47.26	-20.94	68.20	Peak
2	* 9882.500	32.58	14.87	47.45	-20.75	68.20	Peak
3	11659.000	29.82	17.98	47.79	-26.21	74.00	Peak
4	12024.500	30.02	17.82	47.84	-26.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5550MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

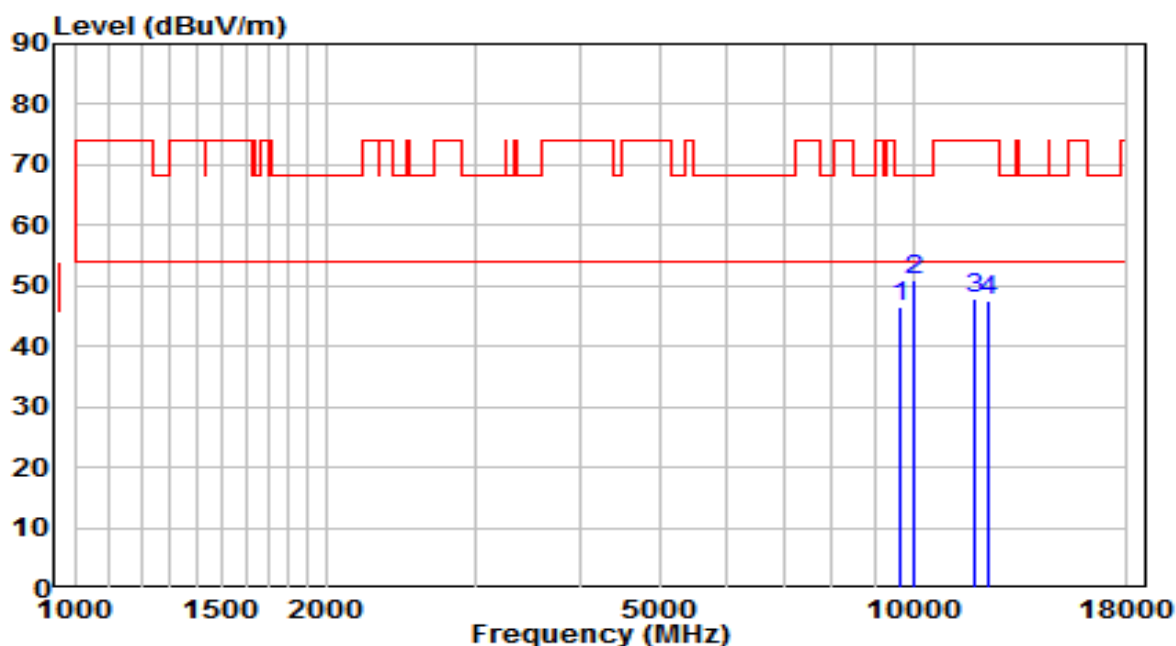


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9670.000	32.48	14.18	46.65	-21.55	68.20	Peak
2	* 10001.500	35.78	15.26	51.05	-17.15	68.20	Peak
3	11837.500	29.98	17.89	47.88	-26.12	74.00	Peak
4	12296.500	29.86	17.81	47.67	-26.33	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

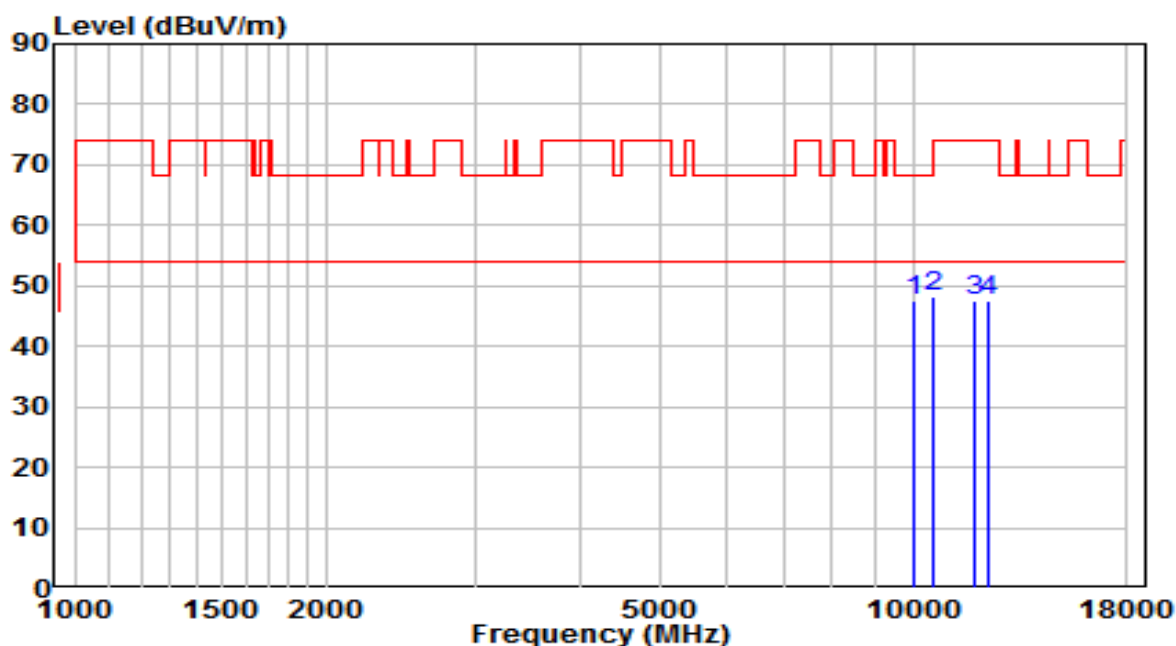


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10001.500	32.14	15.26	47.41	-20.79	68.20	Peak
2	* 10537.000	31.15	16.92	48.07	-20.13	68.20	Peak
3	11829.000	29.60	17.90	47.50	-26.50	74.00	Peak
4	12288.000	29.81	17.81	47.62	-26.38	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

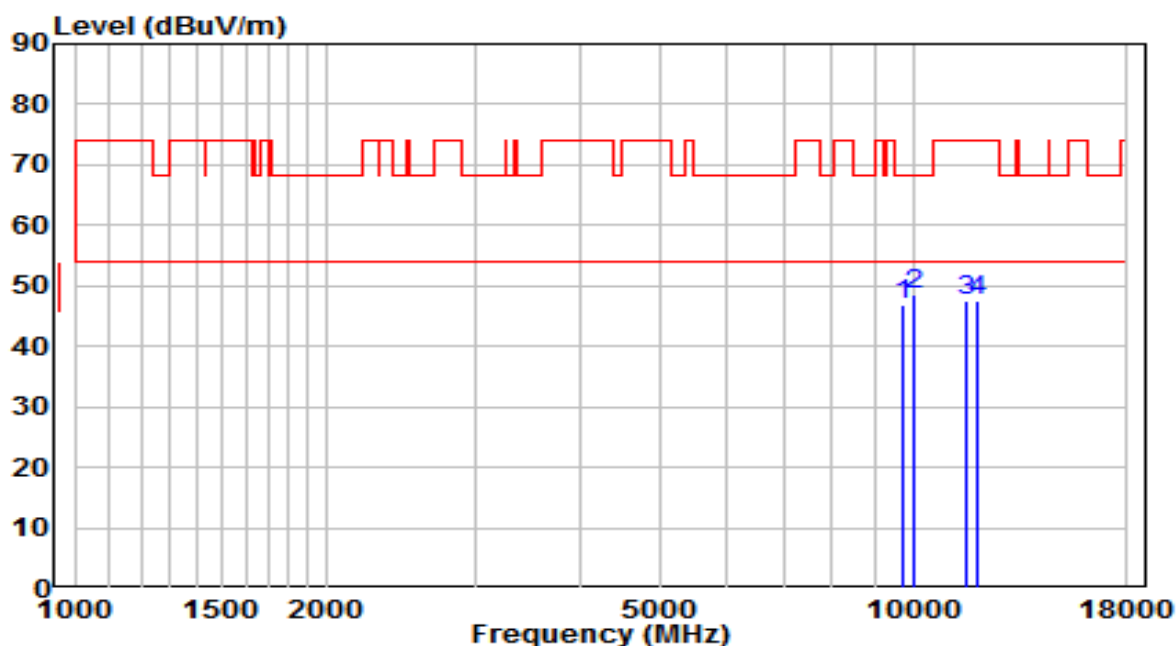


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	32.67	14.35	47.01	-21.19	68.20	Peak
2	* 10001.500	33.38	15.26	48.65	-19.55	68.20	Peak
3	11548.500	29.56	18.03	47.58	-26.42	74.00	Peak
4	11922.500	29.54	17.86	47.39	-26.61	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5710MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

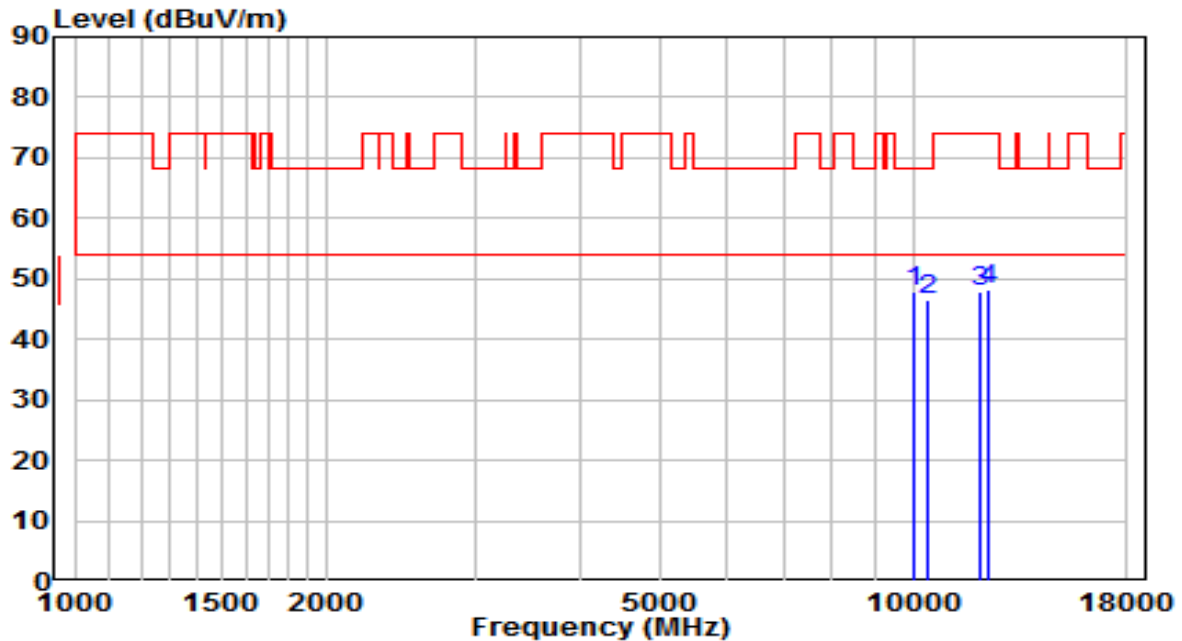


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	32.47	15.26	47.74	-20.46	68.20	Peak
2		10426.500	30.01	16.63	46.64	-21.56	68.20	Peak
3		12016.000	30.11	17.82	47.93	-26.07	74.00	Peak
4		12330.500	30.49	17.81	48.30	-25.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5710MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

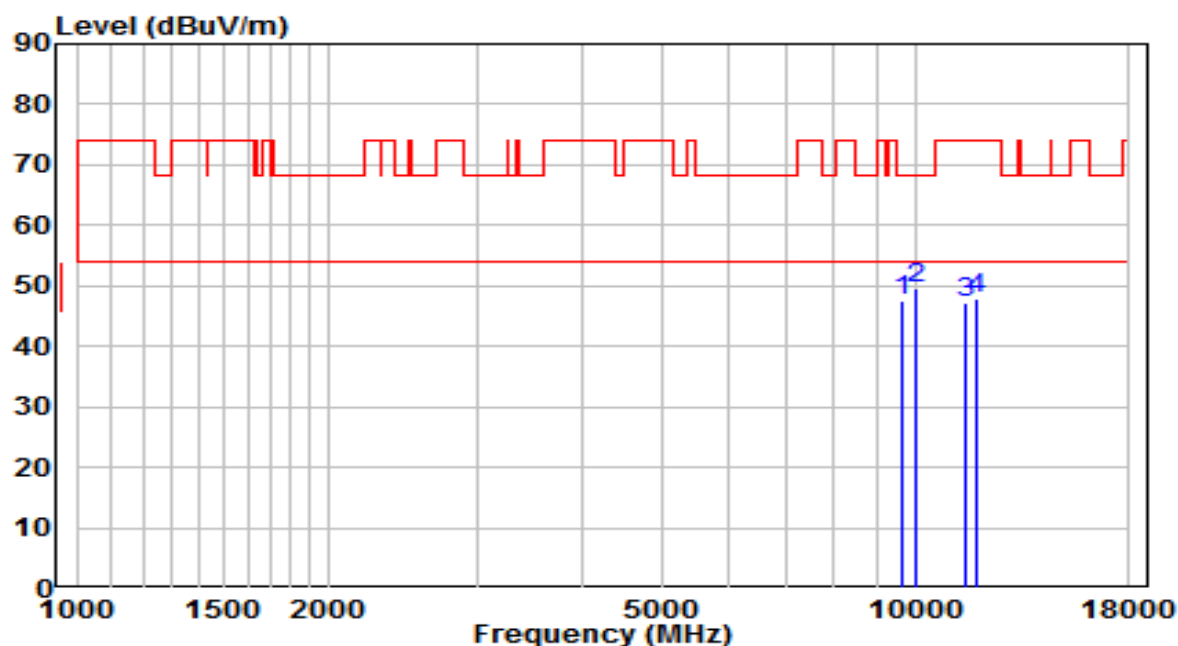


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9653.000	33.27	14.12	47.39	-20.81	68.20	Peak
2	* 10001.500	34.42	15.26	49.69	-18.51	68.20	Peak
3	11463.500	29.32	18.02	47.34	-26.66	74.00	Peak
4	11829.000	30.14	17.90	48.04	-25.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

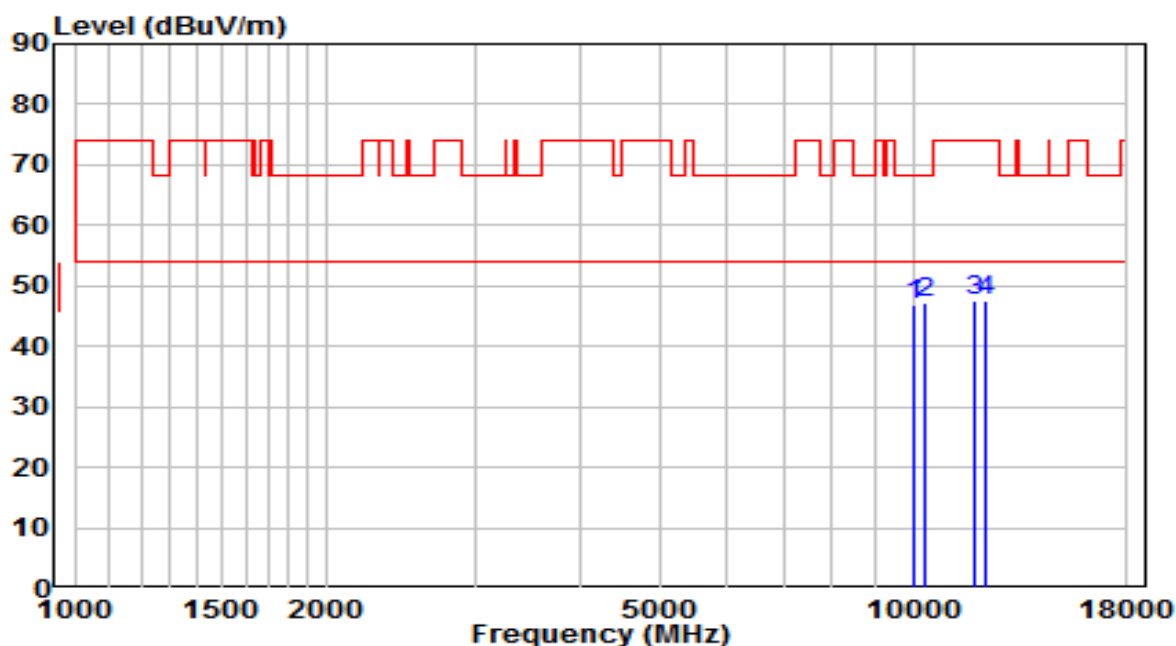


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10010.000	31.57	15.29	46.87	-21.33	68.20	Peak
2	* 10324.500	30.94	16.31	47.24	-20.96	68.20	Peak
3	11829.000	29.55	17.90	47.45	-26.55	74.00	Peak
4	12203.000	29.74	17.81	47.56	-26.44	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

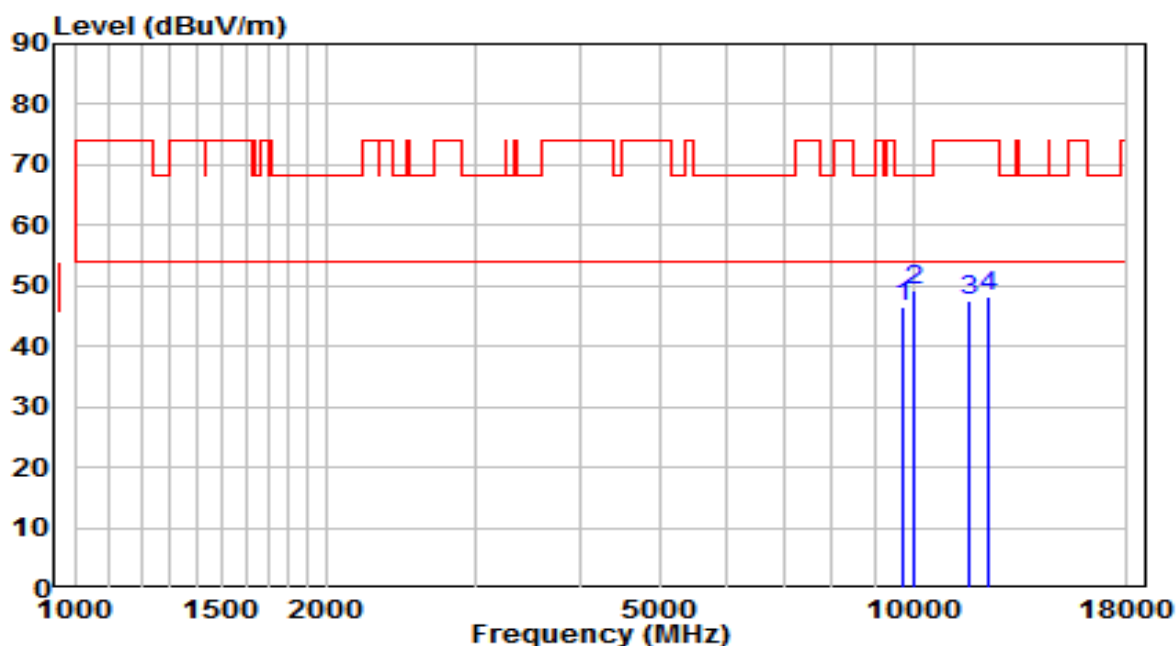


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9729.500	32.16	14.37	46.54	-21.66	68.20	Peak
2	* 10001.500	33.90	15.26	49.17	-19.03	68.20	Peak
3	11659.000	29.68	17.98	47.65	-26.35	74.00	Peak
4	12271.000	30.37	17.81	48.18	-25.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

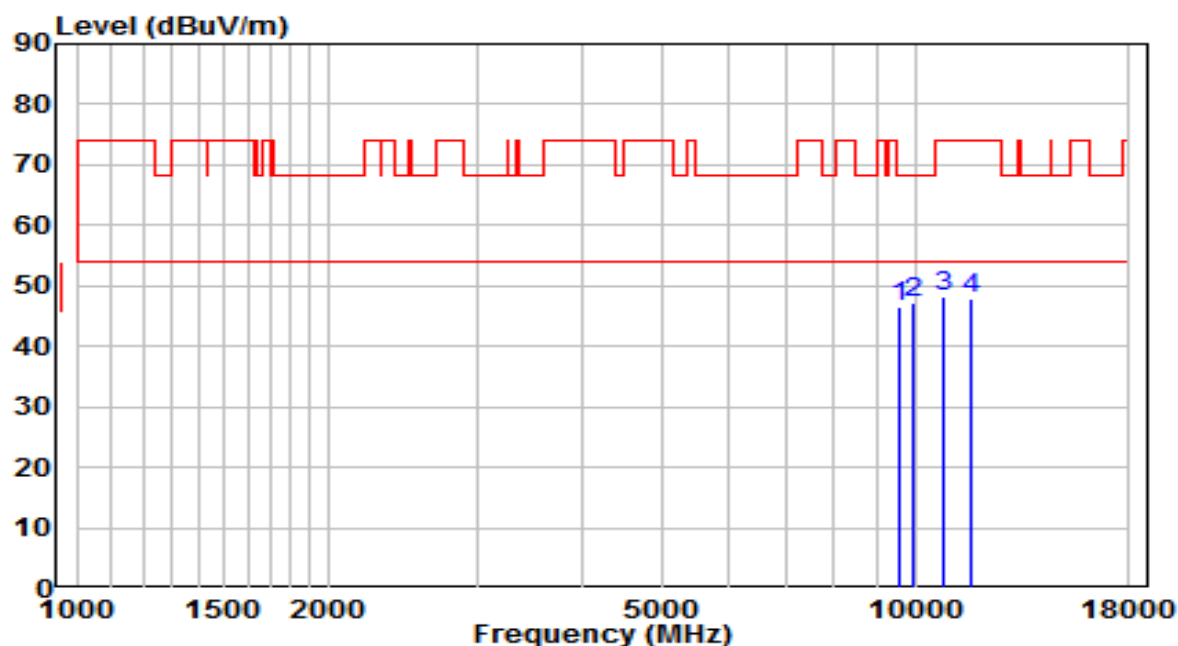


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9593.500	32.74	13.93	46.67	-21.53	68.20	Peak
2	* 9976.000	31.92	15.18	47.10	-21.10	68.20	Peak
3	10809.000	30.94	17.31	48.25	-25.75	74.00	Peak
4	11625.000	29.83	17.99	47.82	-26.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

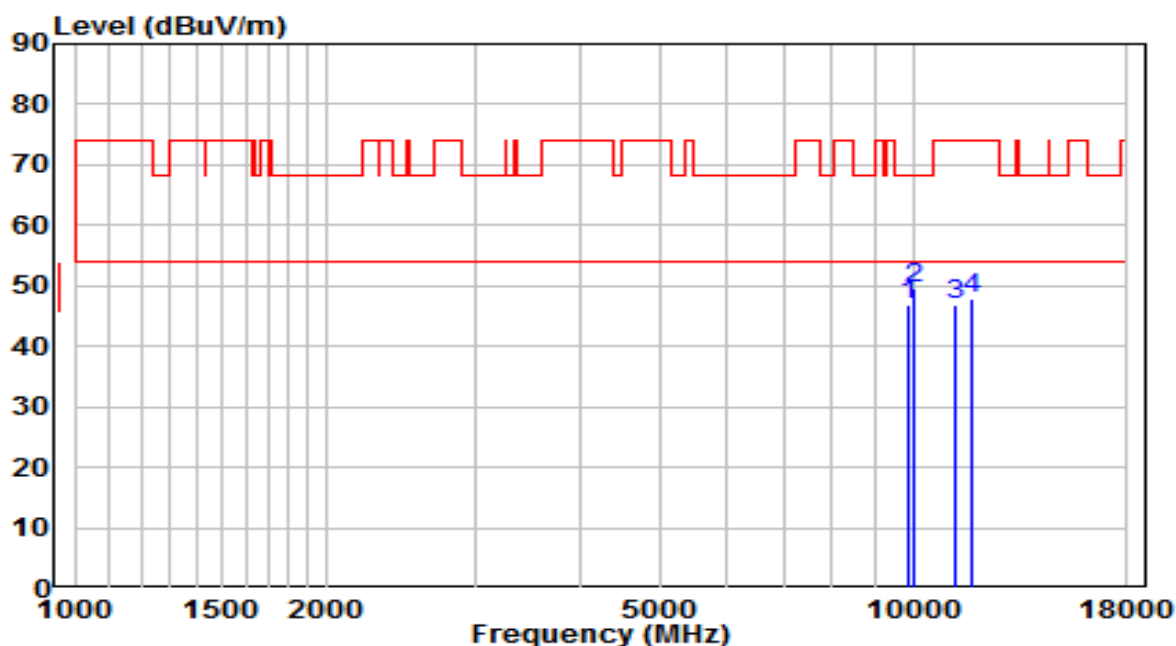


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9857.000	32.21	14.79	47.00	-21.20	68.20	Peak
2	* 10001.500	34.23	15.26	49.49	-18.71	68.20	Peak
3	11200.000	29.04	17.77	46.81	-27.19	74.00	Peak
4	11710.000	29.84	17.95	47.80	-26.20	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5690MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

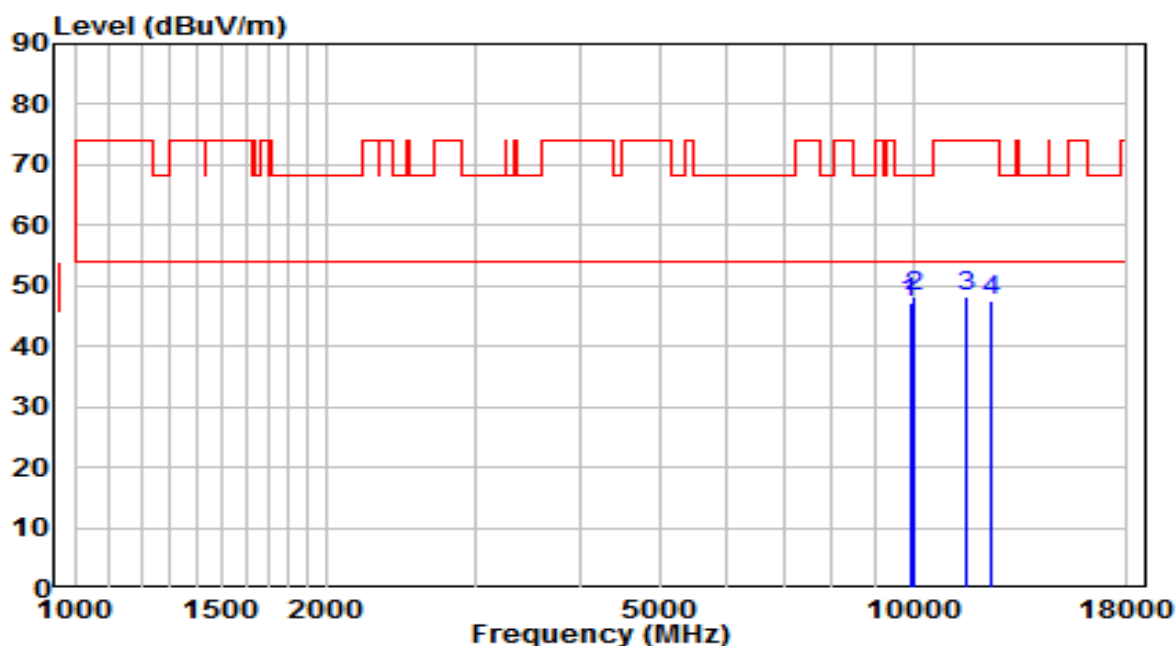


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9908.000	32.23	14.96	47.19	-21.01	68.20	Peak
2	* 10018.500	32.90	15.32	48.22	-19.98	68.20	Peak
3	11565.500	30.19	18.02	48.21	-25.79	74.00	Peak
4	12415.500	29.82	17.81	47.63	-26.37	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5690MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

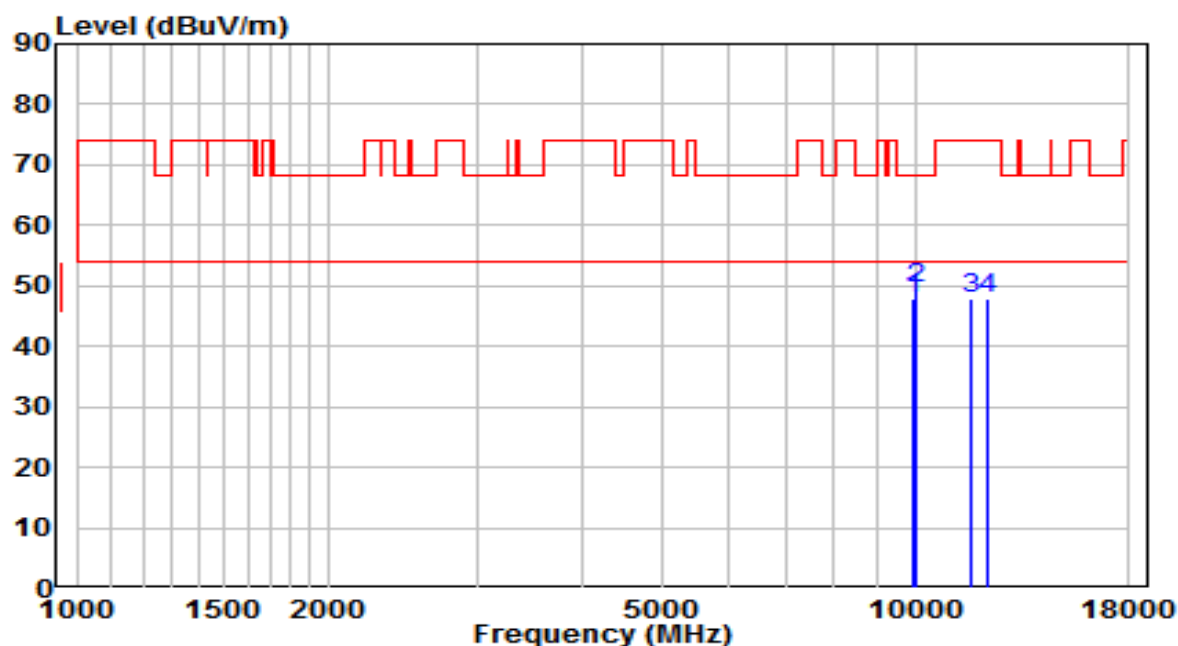


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9950.500	32.70	15.10	47.80	-20.40	68.20	Peak
2	* 10001.500	34.43	15.26	49.70	-18.50	68.20	Peak
3	11659.000	29.87	17.98	47.85	-26.15	74.00	Peak
4	12245.500	29.91	17.81	47.72	-26.28	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

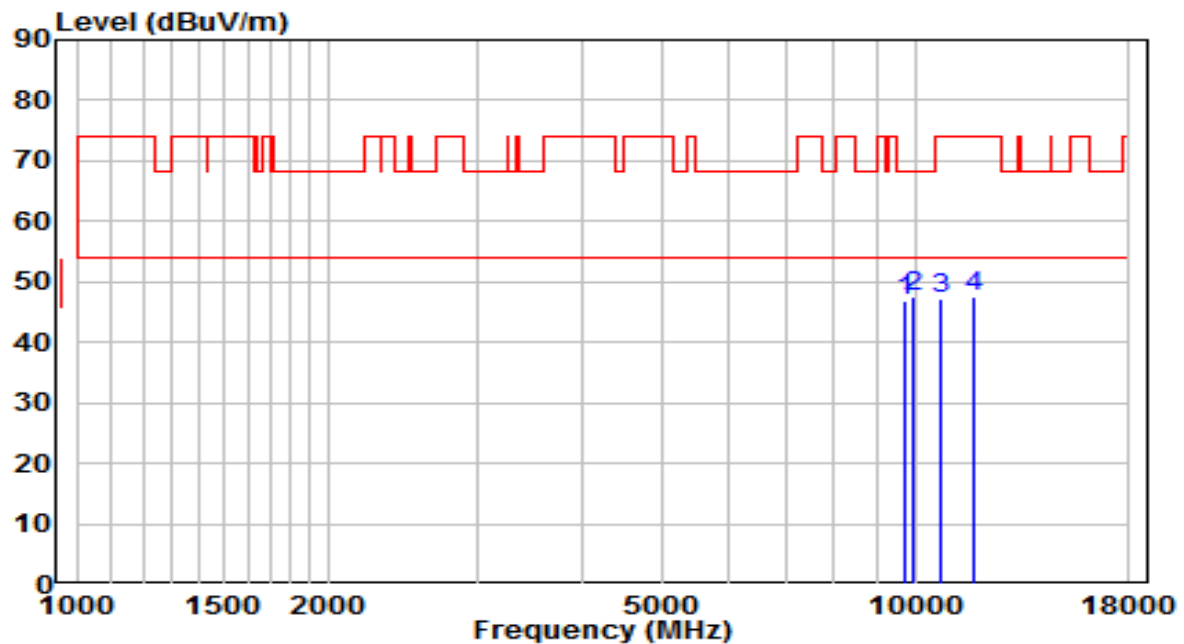


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9712.500	32.53	14.32	46.84	-21.36	68.20	Peak
2	* 9942.000	32.53	15.07	47.60	-20.60	68.20	Peak
3	10766.500	29.89	17.25	47.14	-26.86	74.00	Peak
4	11786.500	29.69	17.92	47.61	-26.39	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

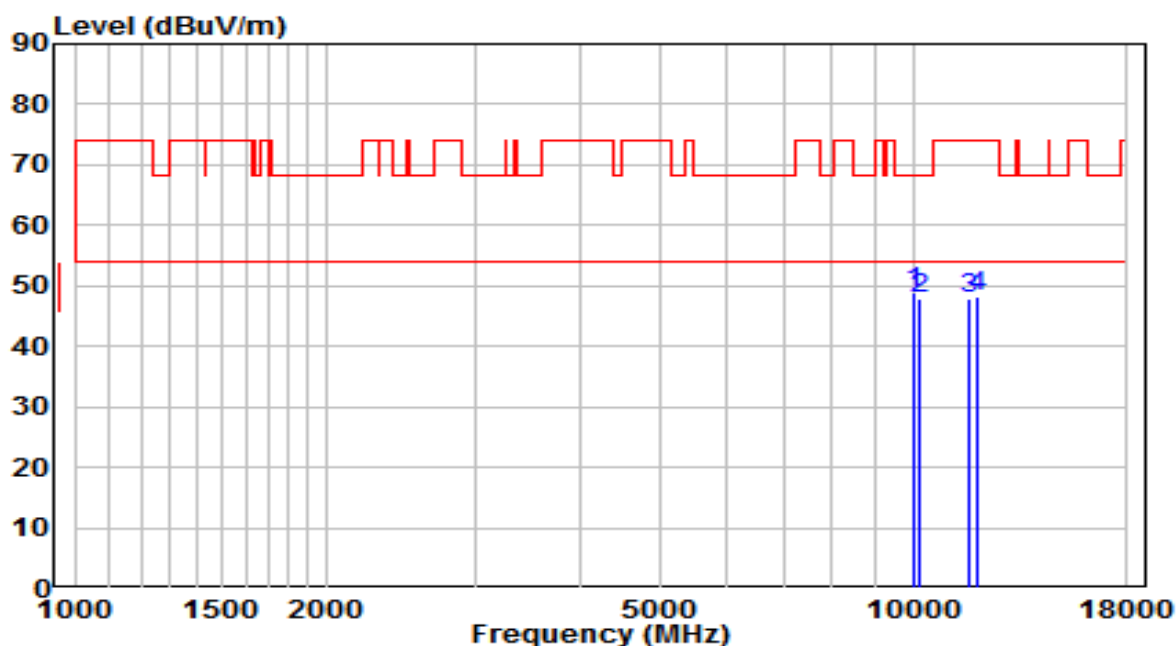


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.71	15.26	48.98	-19.22	68.20	Peak
2		10171.500	32.12	15.81	47.93	-20.27	68.20	Peak
3		11650.500	29.74	17.98	47.72	-26.28	74.00	Peak
4		11922.500	30.29	17.86	48.14	-25.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE20 at channel 5500MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

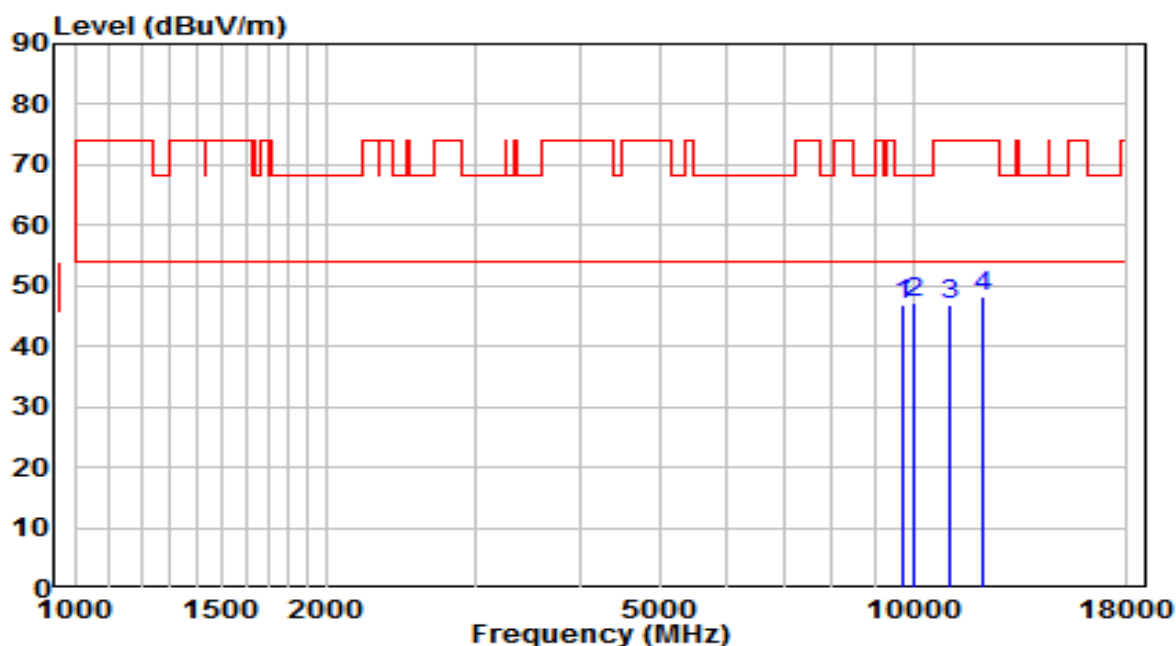


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9704.000	32.44	14.29	46.73	-21.47	68.20	Peak
2	* 9993.000	32.08	15.24	47.32	-20.88	68.20	Peak
3	11030.000	29.31	17.61	46.92	-27.08	74.00	Peak
4	12118.000	30.27	17.82	48.08	-25.92	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE20 at channel 5500MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

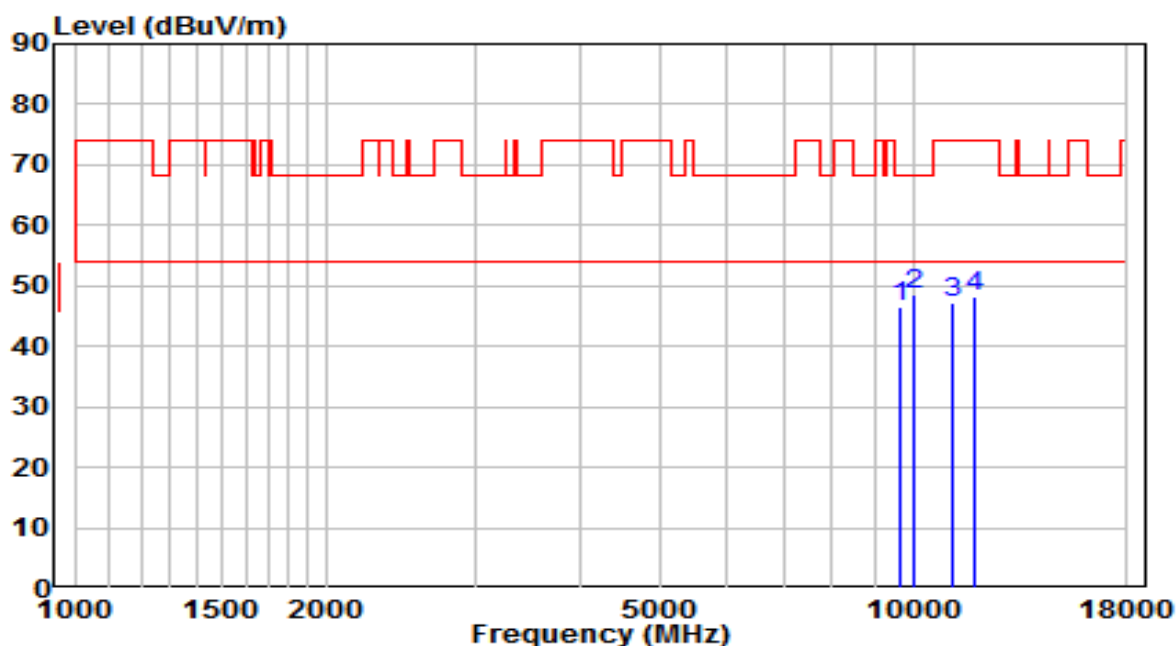


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9670.000	32.48	14.18	46.66	-21.54	68.20	Peak
2	* 10001.500	33.14	15.26	48.40	-19.80	68.20	Peak
3	11149.000	29.41	17.72	47.13	-26.87	74.00	Peak
4	11854.500	30.34	17.89	48.23	-25.77	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE20 at channel 5580MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

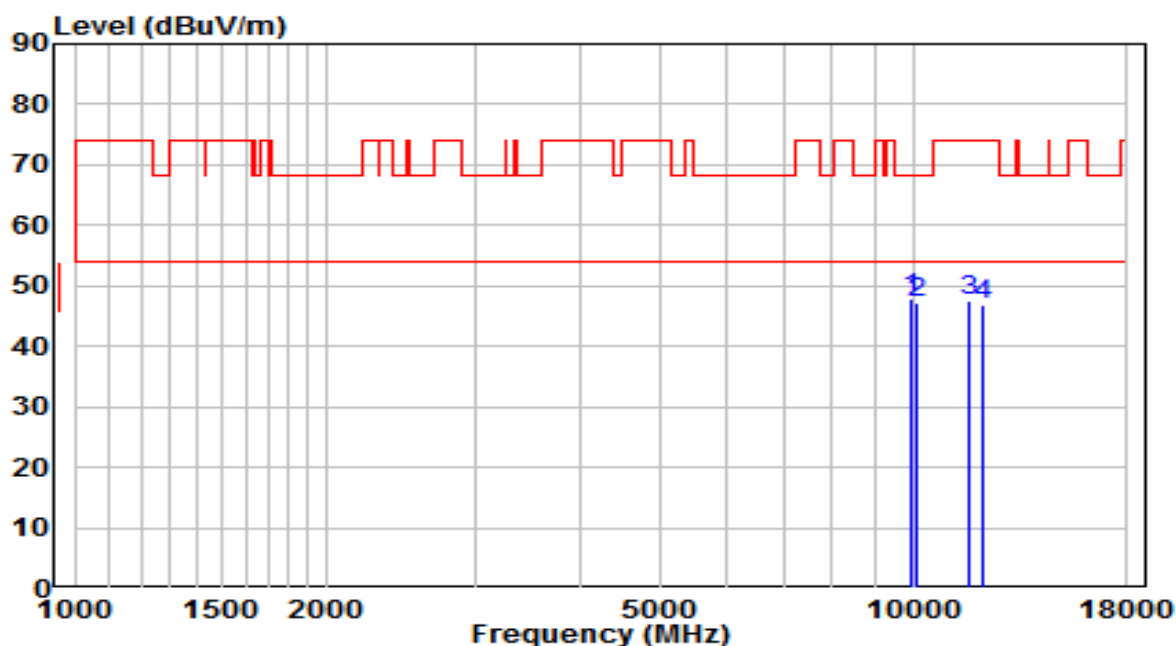


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9933.500	33.00	15.04	48.04	-20.16	68.20	Peak
2		10086.500	31.53	15.54	47.07	-21.13	68.20	Peak
3		11667.500	29.45	17.97	47.42	-26.58	74.00	Peak
4		12126.500	29.21	17.82	47.03	-26.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE20 at channel 5580MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

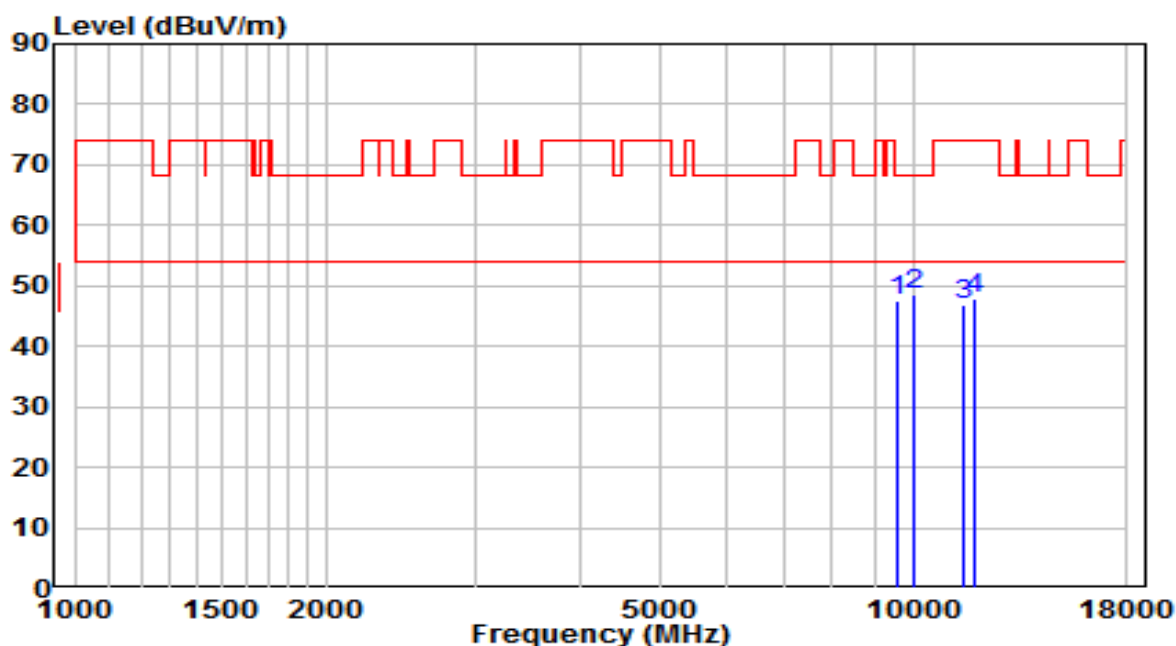


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9551.000	33.84	13.79	47.63	-20.57	68.20	Peak
2	* 10001.500	33.36	15.26	48.62	-19.58	68.20	Peak
3	11455.000	28.95	18.01	46.96	-27.04	74.00	Peak
4	11837.500	30.00	17.89	47.90	-26.10	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE20 at channel 5700MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

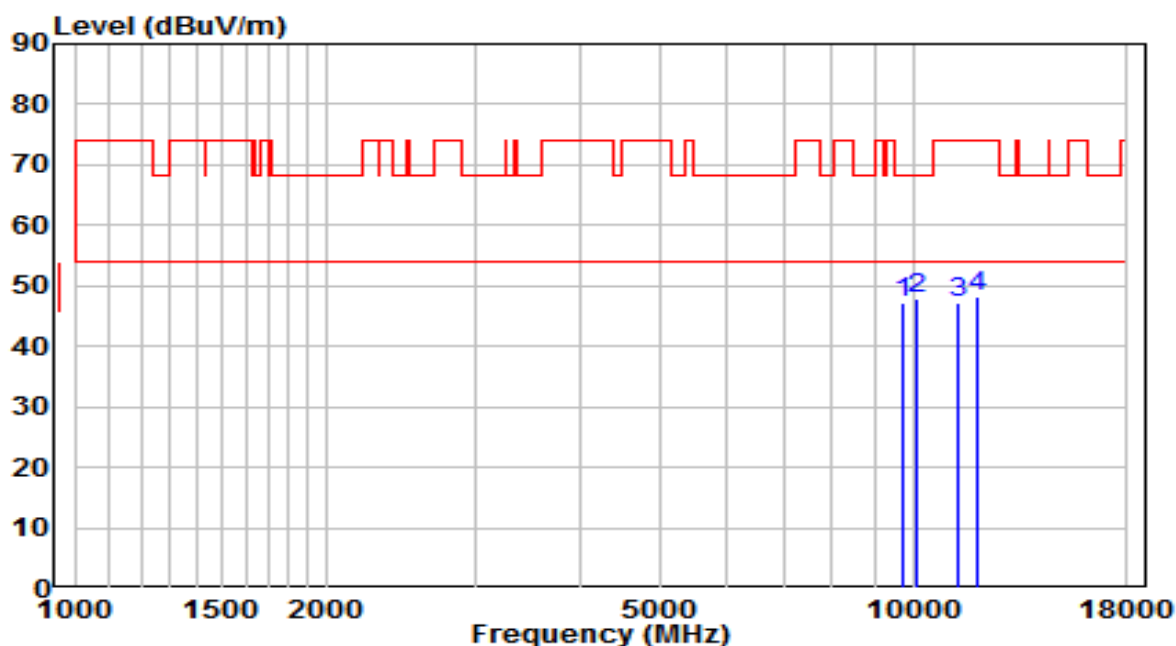


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9729.500	32.85	14.37	47.22	-20.98	68.20	Peak
2	* 10103.500	32.39	15.59	47.99	-20.21	68.20	Peak
3	11276.500	29.22	17.84	47.06	-26.94	74.00	Peak
4	11948.000	30.27	17.84	48.11	-25.89	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE20 at channel 5700MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

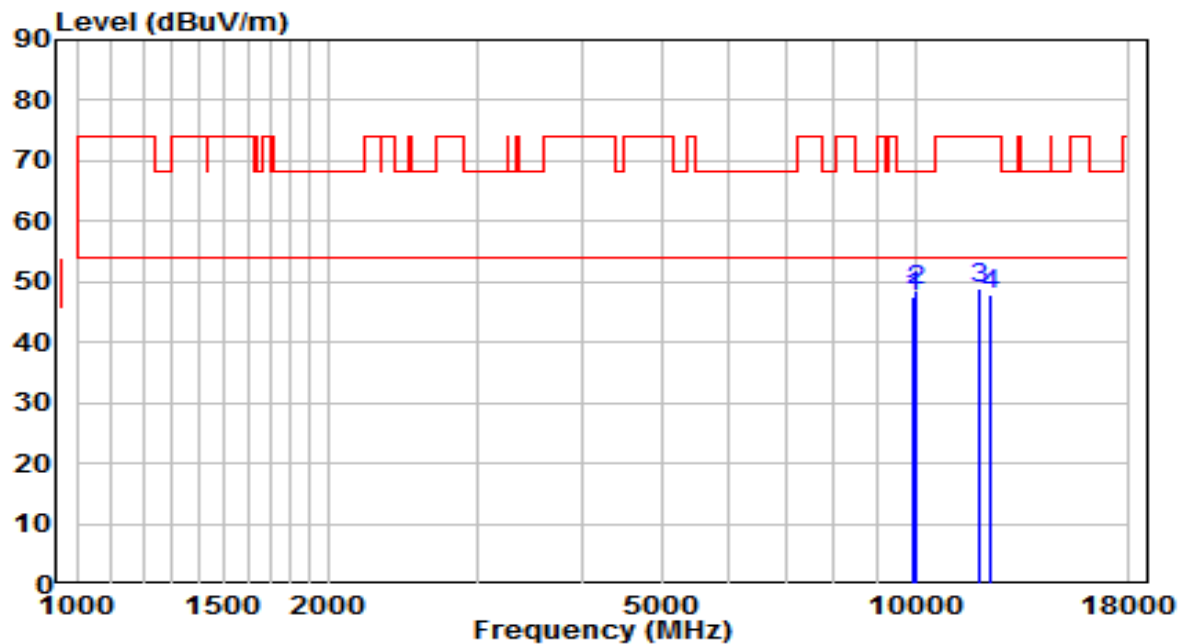


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9942.000	32.39	15.07	47.46	-20.74	68.20	Peak
2	* 10001.500	33.31	15.26	48.57	-19.63	68.20	Peak
3	11888.500	30.88	17.87	48.75	-25.25	74.00	Peak
4	12339.000	30.09	17.81	47.90	-26.10	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE20 at channel 5720MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

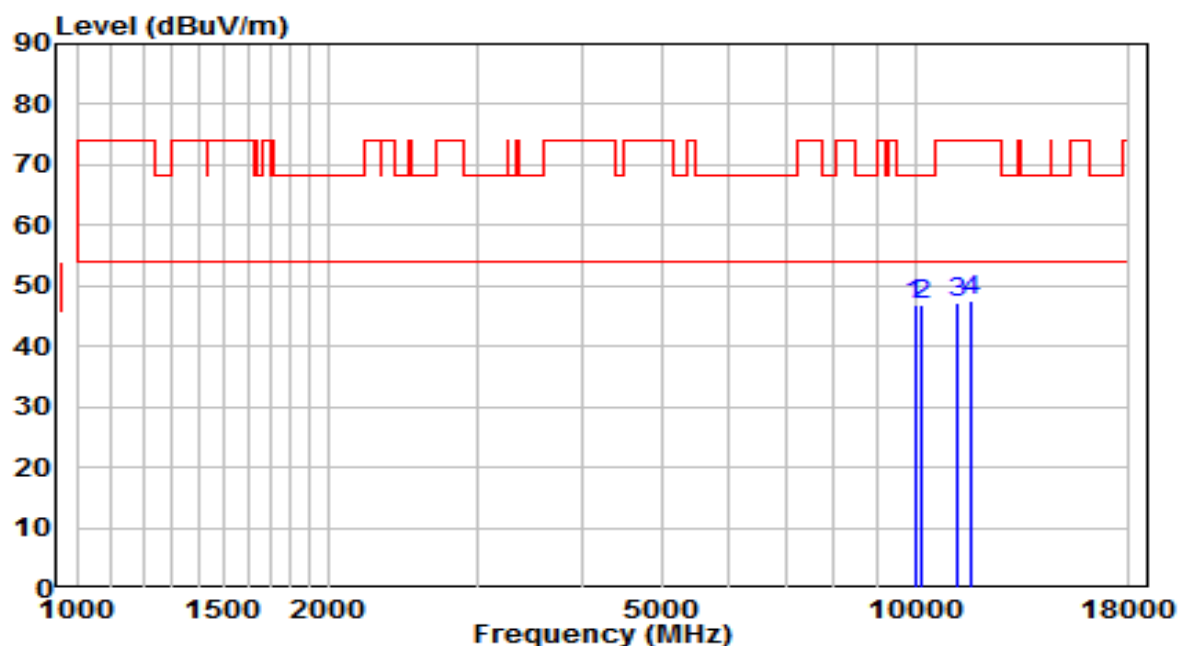


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9984.500	31.53	15.21	46.74	-21.46	68.20	Peak
2	* 10163.000	31.21	15.78	46.99	-21.21	68.20	Peak
3	11225.500	29.35	17.79	47.14	-26.86	74.00	Peak
4	11659.000	29.62	17.98	47.59	-26.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE20 at channel 5720MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

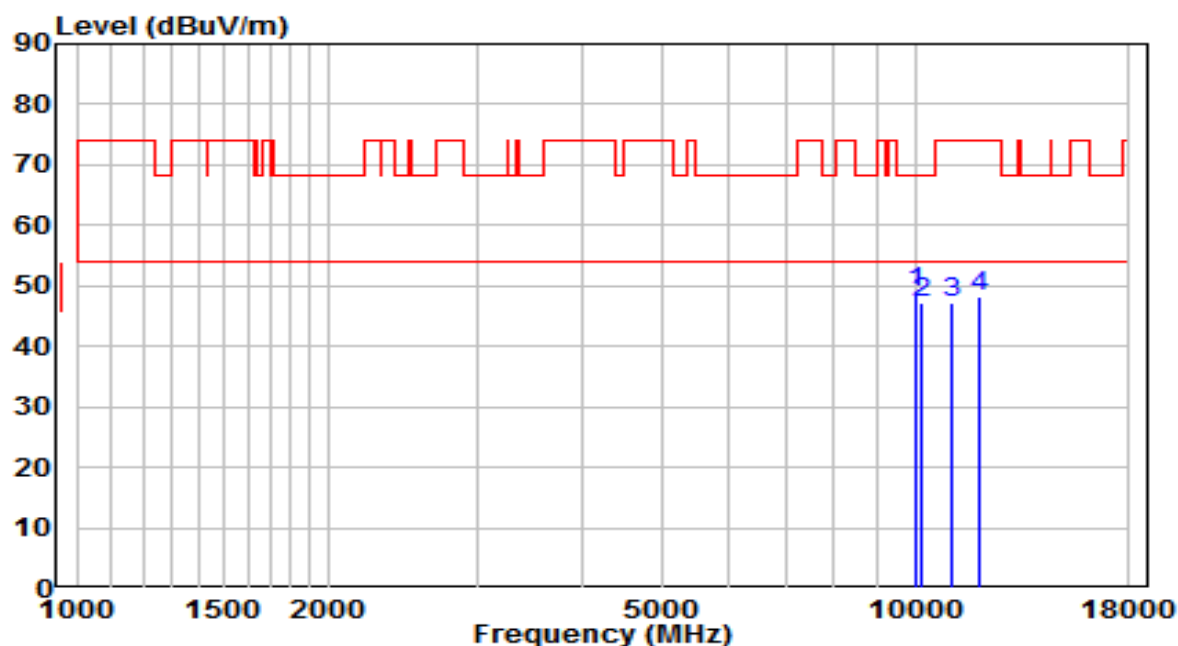


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.78	15.26	49.04	-19.16	68.20	Peak
2		10171.500	31.46	15.81	47.27	-20.93	68.20	Peak
3		11047.000	29.48	17.62	47.10	-26.90	74.00	Peak
4		11922.500	30.21	17.86	48.07	-25.93	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE40 at channel 5510MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

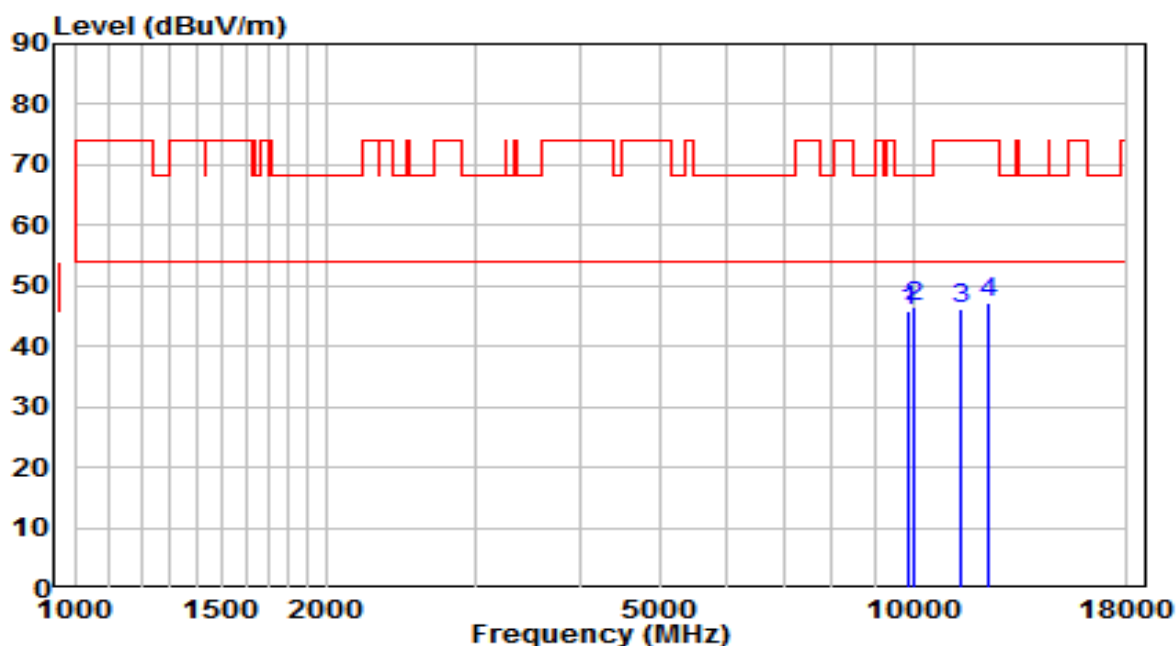


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9848.500	31.17	14.76	45.93	-22.27	68.20	Peak
2	* 9993.000	31.33	15.24	46.57	-21.63	68.20	Peak
3	11361.500	28.16	17.92	46.08	-27.92	74.00	Peak
4	12279.500	29.31	17.81	47.12	-26.88	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE40 at channel 5510MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

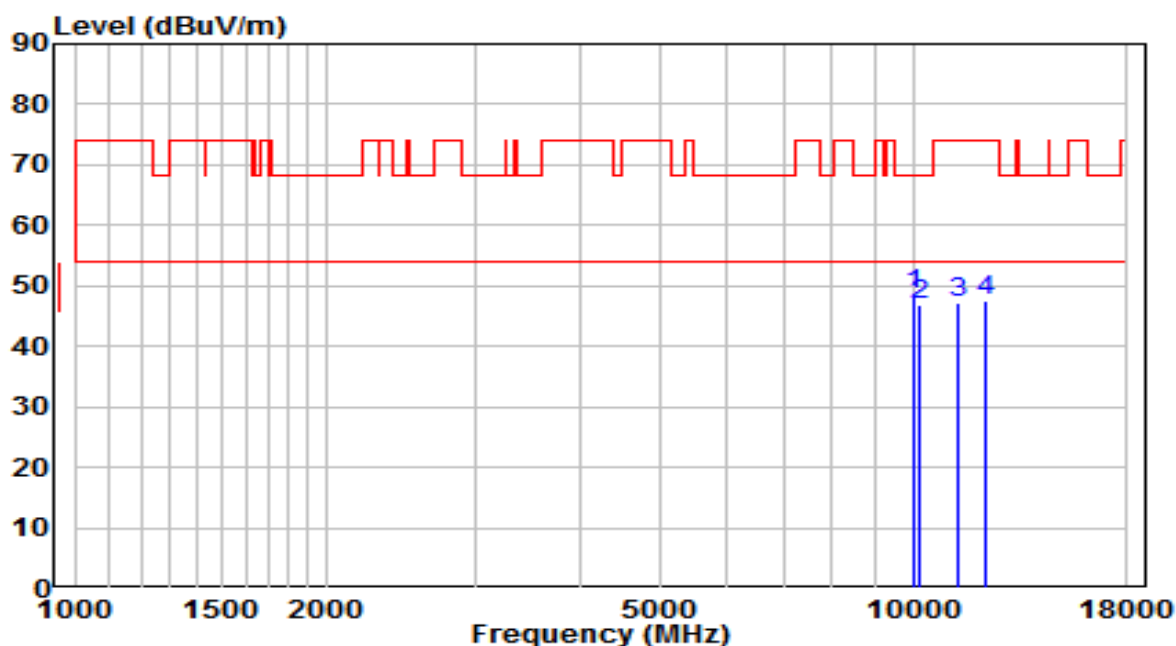


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.44	15.26	48.70	-19.50	68.20	Peak
2		10180.000	30.98	15.84	46.82	-21.38	68.20	Peak
3		11276.500	29.45	17.84	47.29	-26.71	74.00	Peak
4		12169.000	29.84	17.82	47.65	-26.35	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE40 at channel 5550MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

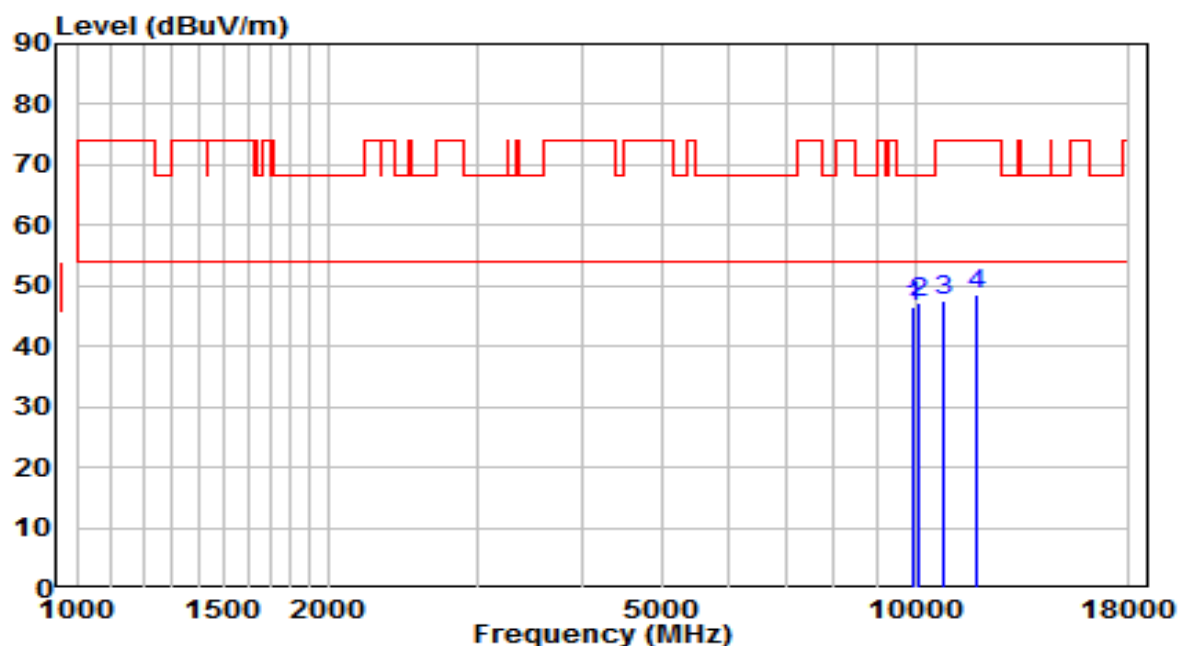


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9942.000	31.54	15.07	46.61	-21.59	68.20	Peak
2	* 10078.000	31.54	15.51	47.05	-21.15	68.20	Peak
3	10809.000	30.24	17.31	47.55	-26.45	74.00	Peak
4	11837.500	30.62	17.89	48.52	-25.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE40 at channel 5550MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

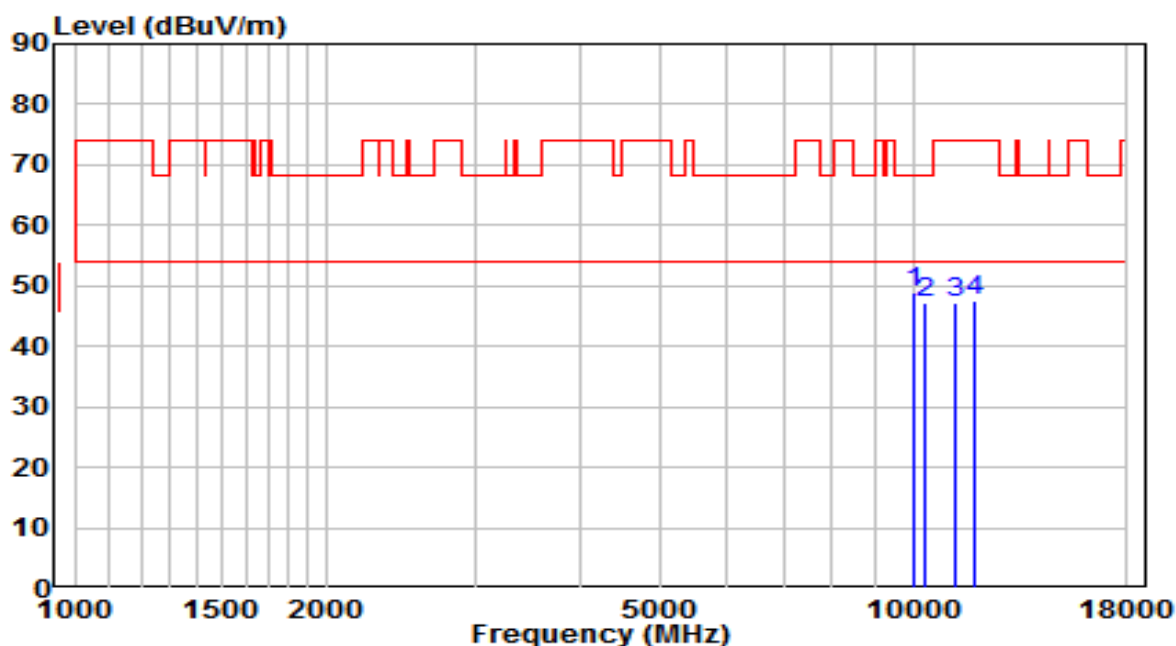


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	33.77	15.26	49.04	-19.16	68.20	Peak
2		10358.500	30.64	16.41	47.06	-21.14	68.20	Peak
3		11259.500	29.53	17.82	47.36	-26.64	74.00	Peak
4		11829.000	29.81	17.90	47.71	-26.29	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE40 at channel 5670MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

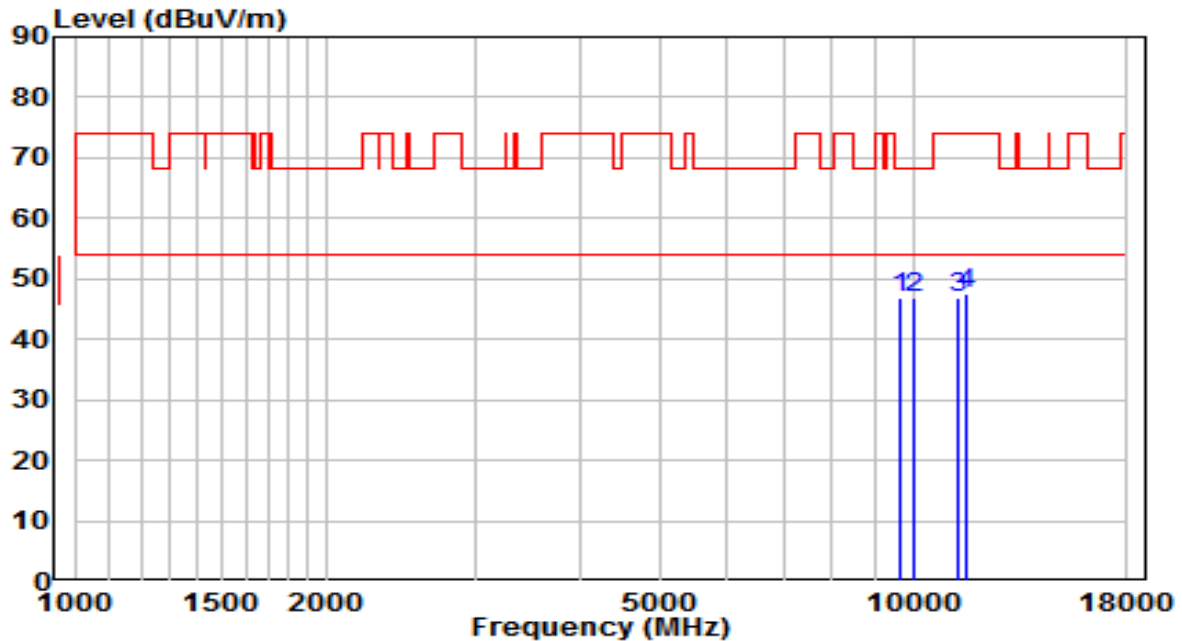


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9627.500	32.99	14.04	47.03	-21.17	68.20	Peak
2		10035.500	31.64	15.37	47.01	-21.19	68.20	Peak
3		11310.500	29.17	17.87	47.04	-26.96	74.00	Peak
4		11608.000	29.49	18.00	47.49	-26.51	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE40 at channel 5670MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

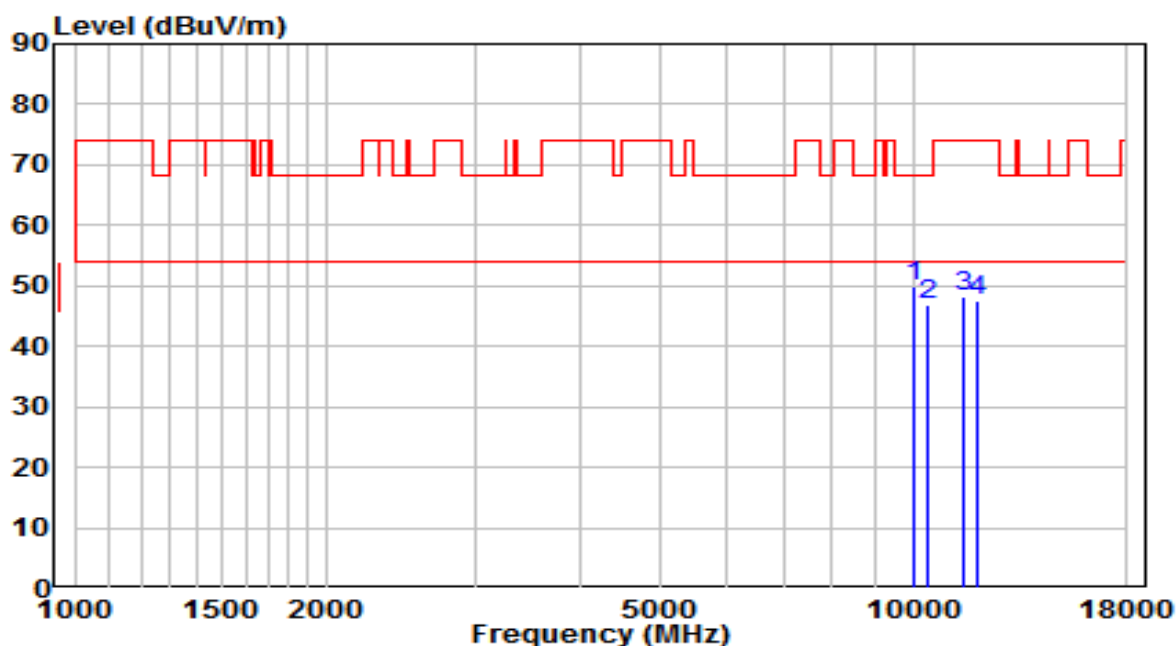


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	10001.500	34.64	15.26	49.91	-18.29	68.20	Peak
2		10401.000	30.45	16.55	47.00	-21.20	68.20	Peak
3		11446.500	30.25	18.00	48.25	-25.75	74.00	Peak
4		11922.500	29.73	17.86	47.59	-26.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE40 at channel 5710MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

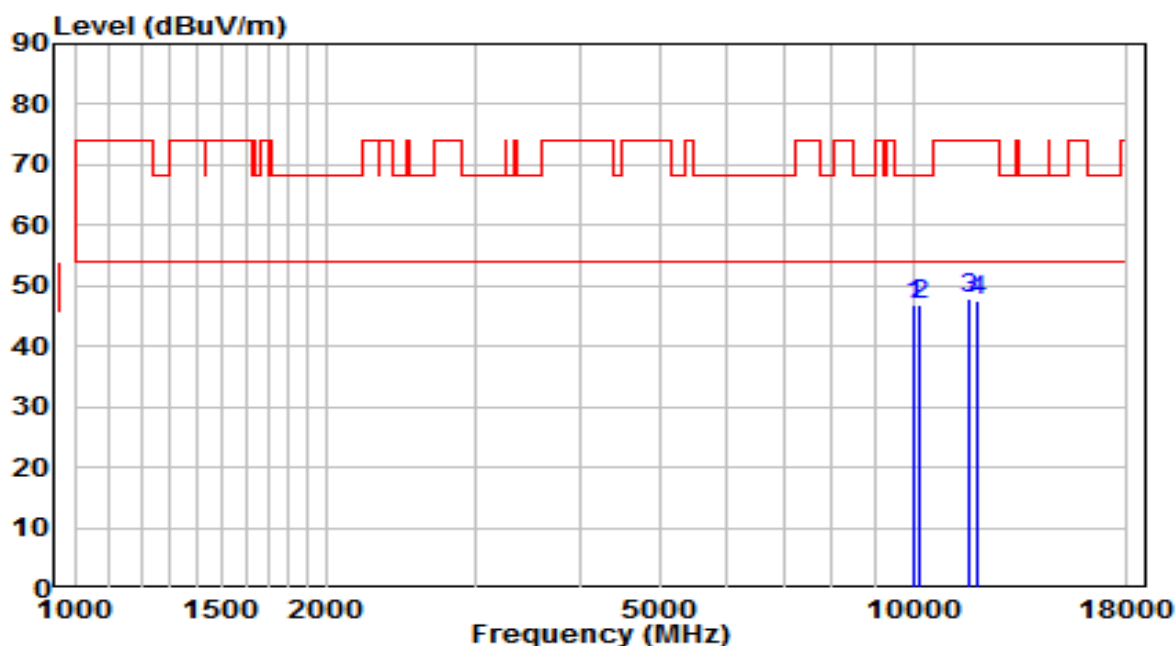


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10001.500	31.50	15.26	46.77	-21.43	68.20	Peak
2	* 10188.500	31.05	15.87	46.91	-21.29	68.20	Peak
3	11650.500	30.01	17.98	47.99	-26.01	74.00	Peak
4	11897.000	29.76	17.87	47.63	-26.37	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE40 at channel 5710MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

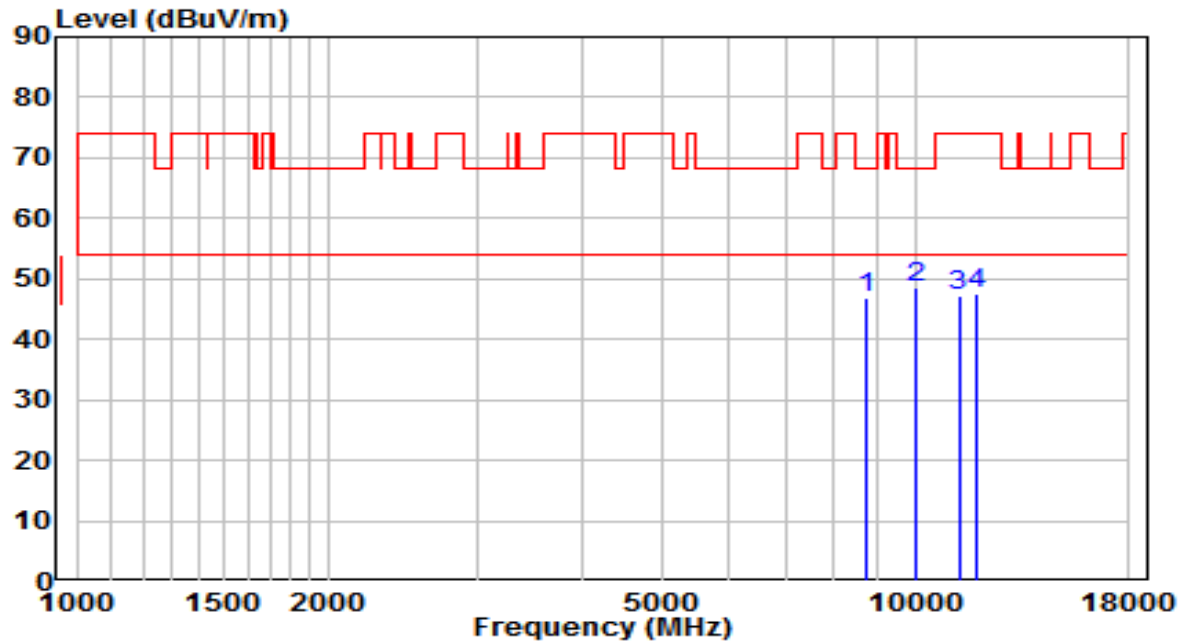


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8760.500	33.80	13.15	46.94	-21.26	68.20	Peak
2	* 10001.500	33.47	15.26	48.74	-19.46	68.20	Peak
3	11268.000	29.24	17.83	47.07	-26.93	74.00	Peak
4	11880.000	29.67	17.88	47.54	-26.46	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Wi-Fi 6 三頻電競路由器	Date of Test	2020-05-18
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/45.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-HE80 at channel 5530MHz(CDD Mode N _{SS} =2)	Test Voltage	110V/60Hz

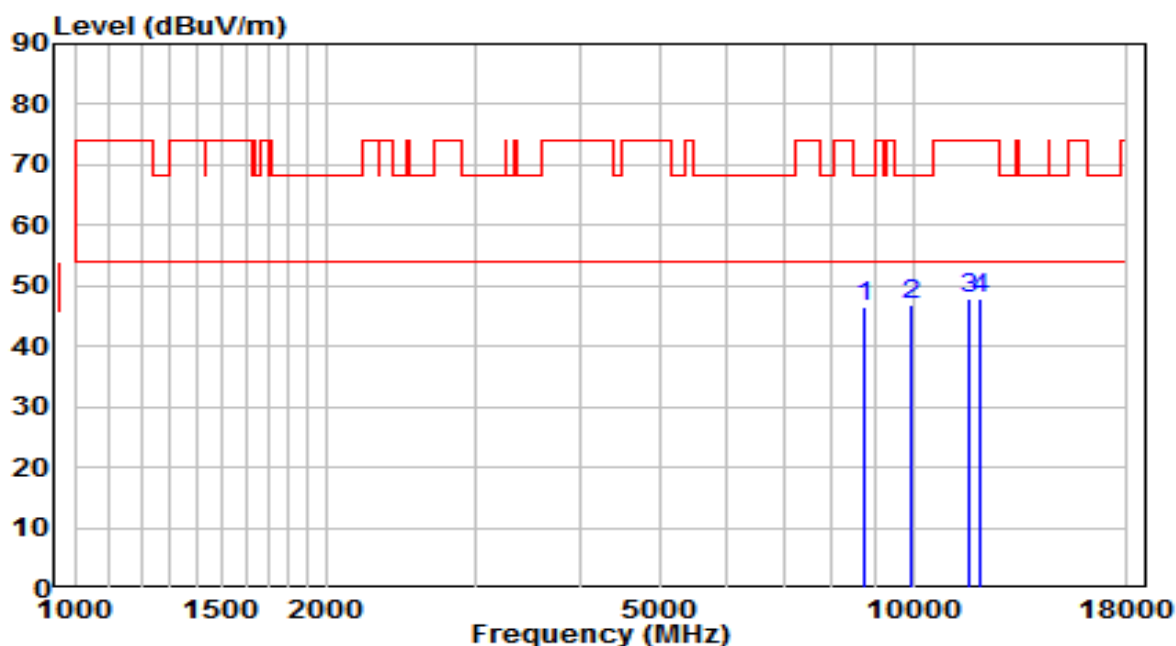

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8760.500	33.36	13.15	46.51	-21.69	68.20	Peak
2	* 9976.000	31.81	15.18	46.99	-21.21	68.20	Peak
3	11650.500	29.94	17.98	47.93	-26.07	74.00	Peak
4	12058.500	30.04	17.82	47.85	-26.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.