


EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

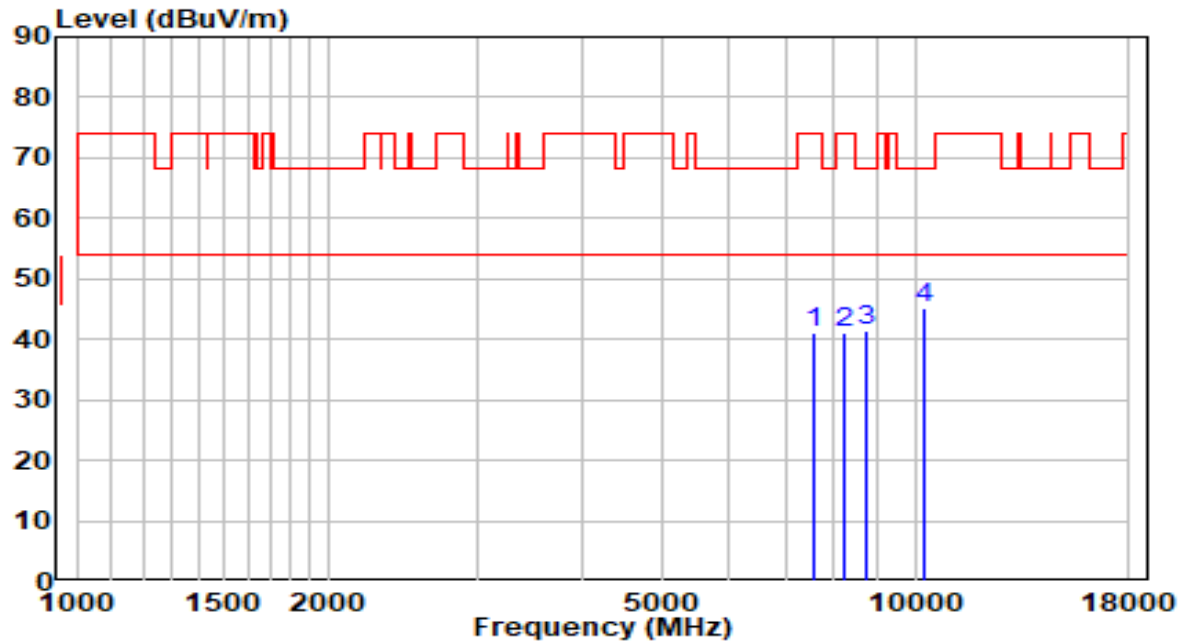


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	29.11	11.83	40.94	-33.06	74.00	Peak
2	8242.000	28.55	12.49	41.04	-32.96	74.00	Peak
3	8769.000	28.30	13.11	41.41	-26.79	68.20	Peak
4	* 10231.000	28.98	16.15	45.13	-23.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

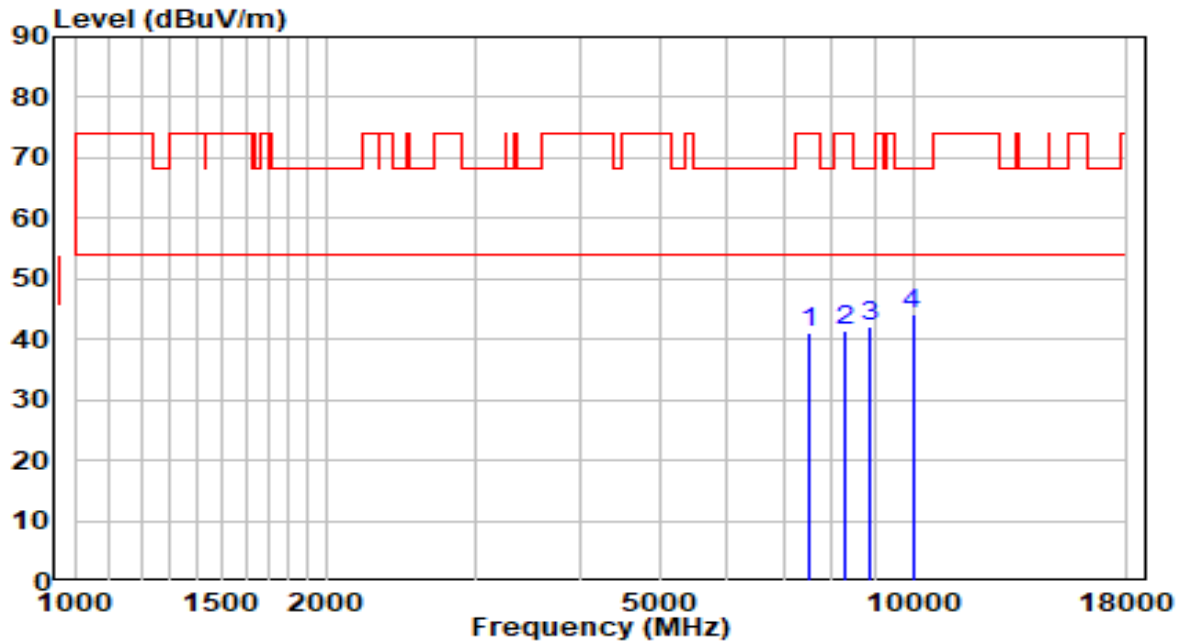


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	29.41	11.77	41.19	-32.81	74.00	Peak
2	8310.000	28.92	12.48	41.40	-32.60	74.00	Peak
3	8905.000	28.72	13.45	42.17	-26.03	68.20	Peak
4	* 9984.500	28.69	15.33	44.02	-24.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz - CDD Mode	Test Voltage	110V/60Hz

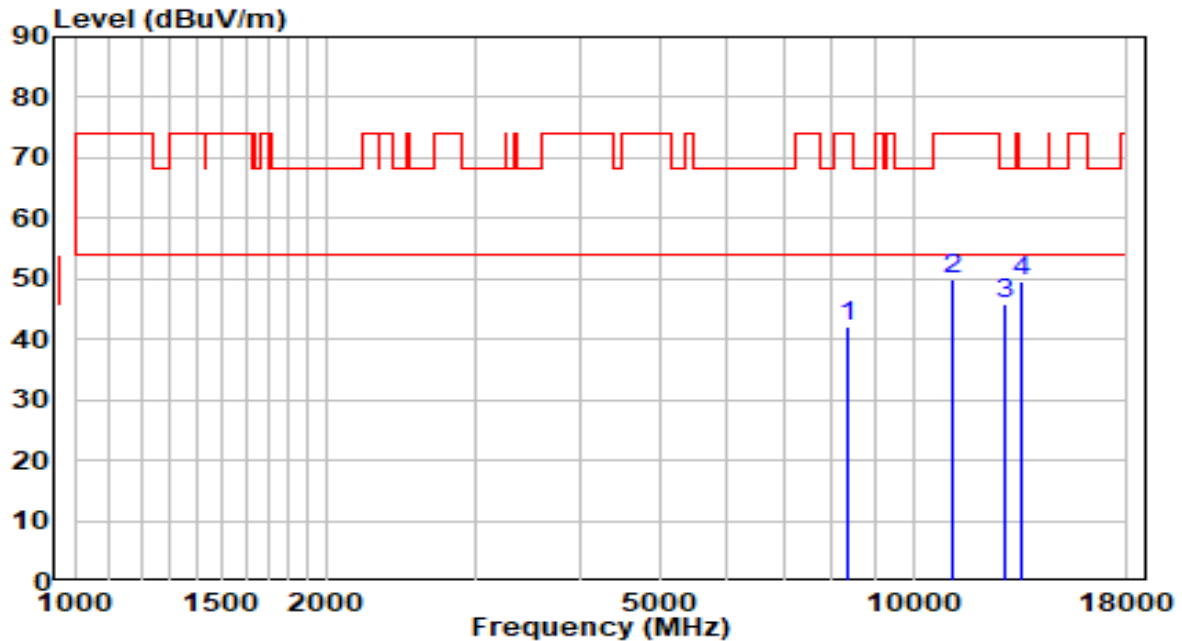


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8344.000	29.48	12.48	41.96	-32.04	74.00	Peak
2	11166.000	31.80	18.00	49.80	-24.20	74.00	Peak
3	12866.000	27.05	18.92	45.97	-22.23	68.20	Peak
4	* 13495.000	29.06	20.54	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz - CDD Mode	Test Voltage	110V/60Hz

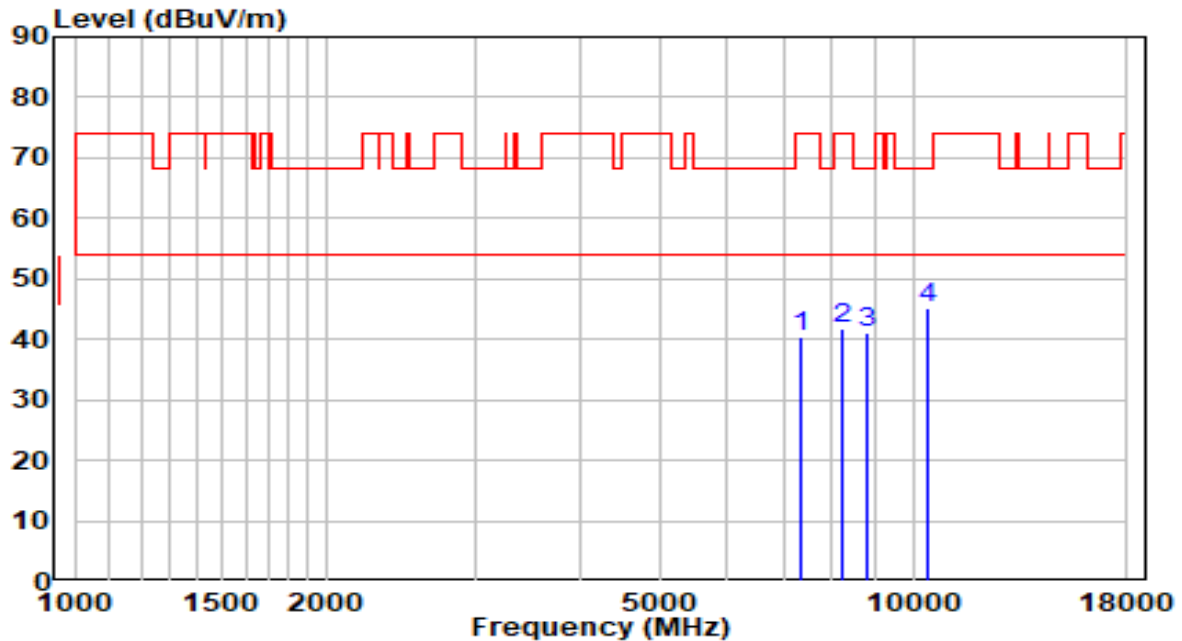


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7349.500	29.04	11.29	40.33	-33.67	74.00	Peak
2	8242.000	29.13	12.49	41.62	-32.38	74.00	Peak
3	8794.500	27.84	13.18	41.02	-27.18	68.20	Peak
4	* 10384.000	28.43	16.67	45.11	-23.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

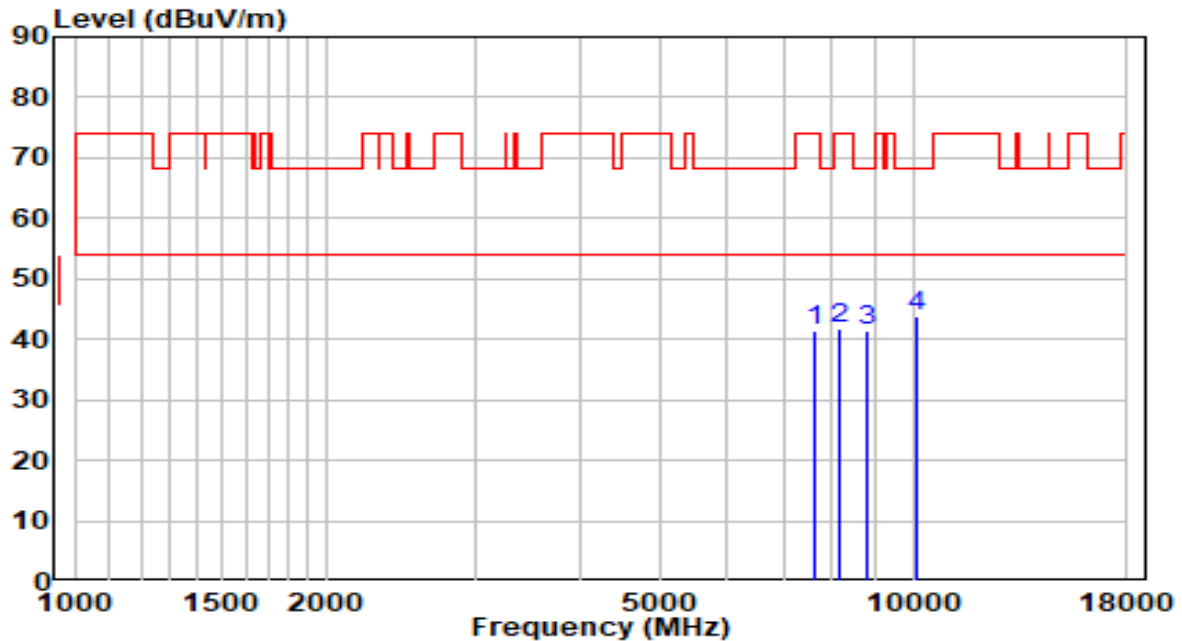


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	33.53	8.00	41.52	-32.48	74.00	Peak
2	8191.000	33.34	8.54	41.88	-32.12	74.00	Peak
3	8828.500	31.53	9.80	41.32	-26.88	68.20	Peak
4	* 10129.000	32.75	11.15	43.90	-24.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

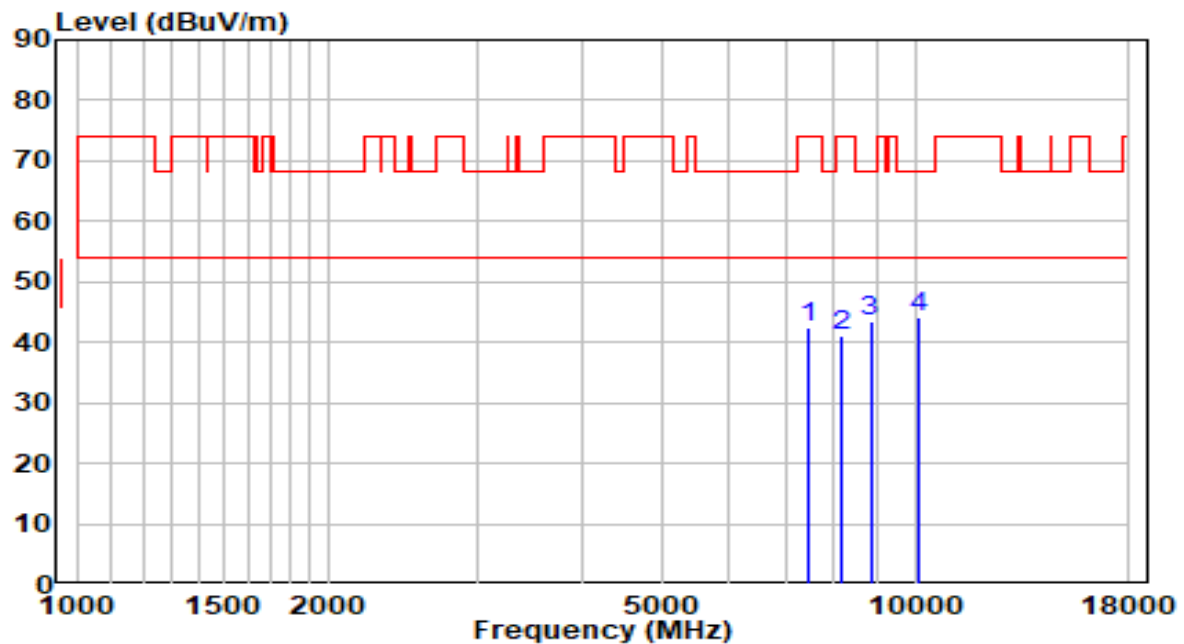


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	30.80	11.67	42.47	-31.53	74.00	Peak
2	8174.000	28.58	12.50	41.08	-32.92	74.00	Peak
3	8845.500	30.23	13.30	43.53	-24.67	68.20	Peak
4	* 10086.500	28.54	15.66	44.19	-24.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz - CDD Mode	Test Voltage	110V/60Hz

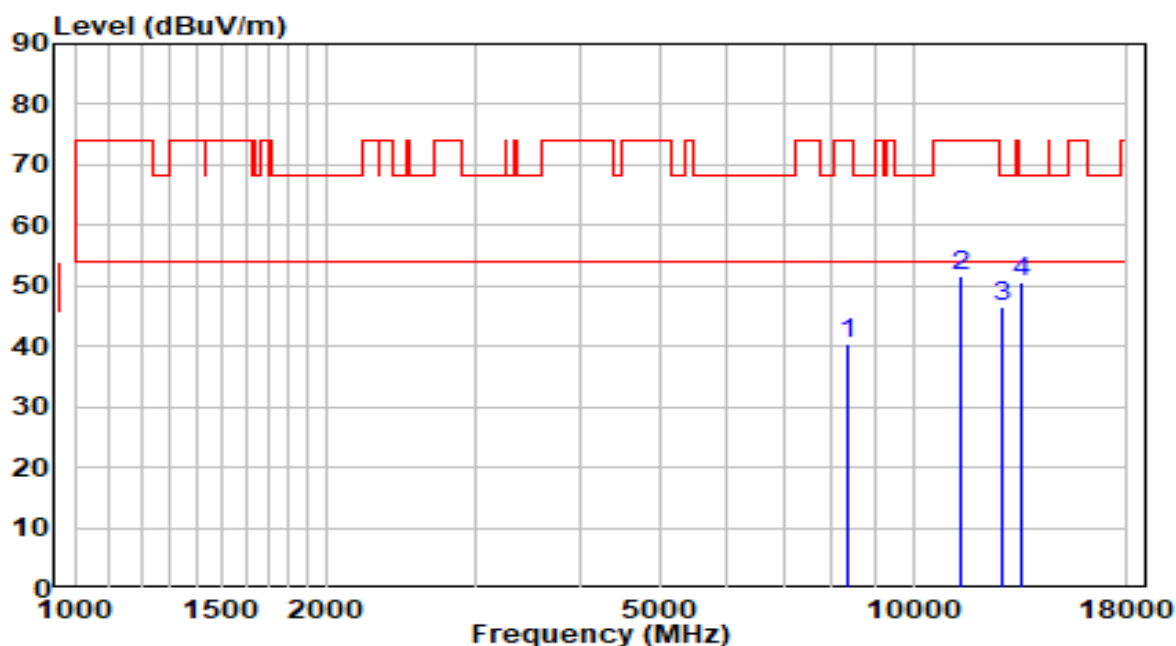


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8327.000	27.84	12.48	40.32	-33.68	74.00	Peak
2	11438.000	33.18	18.37	51.54	-22.46	74.00	Peak
3	12764.000	28.00	18.64	46.63	-21.57	68.20	Peak
4	* 13495.000	30.23	20.54	50.77	-17.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz - CDD Mode	Test Voltage	110V/60Hz

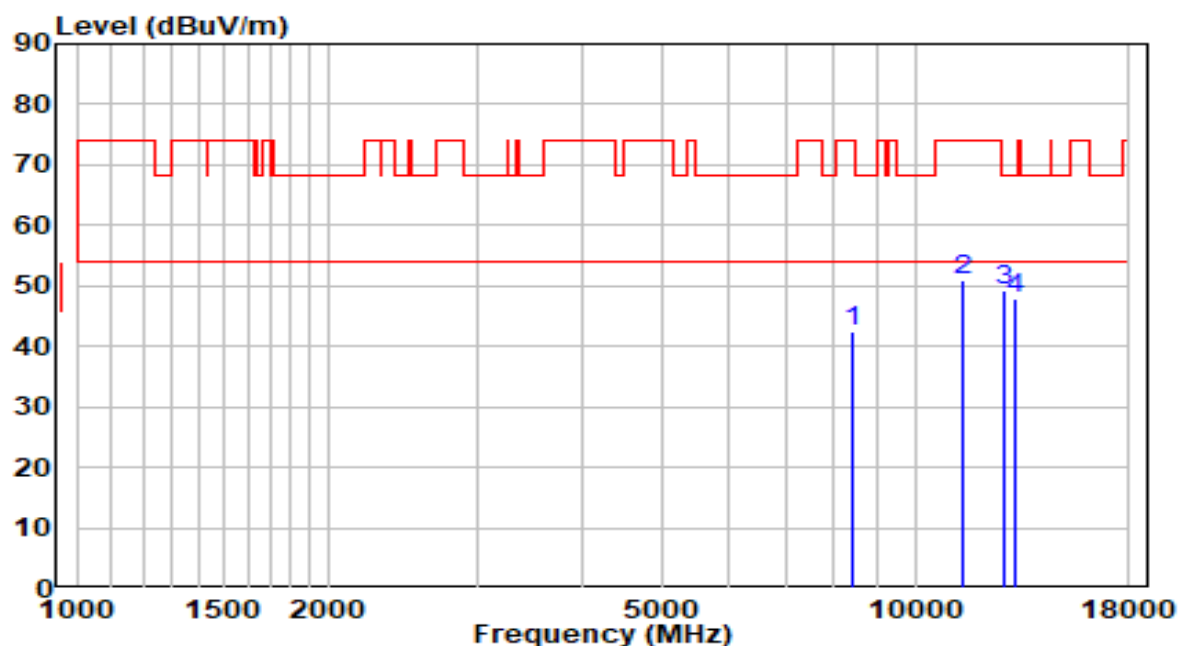


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8412.000	30.14	12.47	42.61	-31.39	74.00	Peak
2	11438.000	32.50	18.37	50.87	-23.13	74.00	Peak
3	* 12764.000	30.53	18.64	49.17	-19.03	68.20	Peak
4	13197.500	28.02	19.79	47.81	-20.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

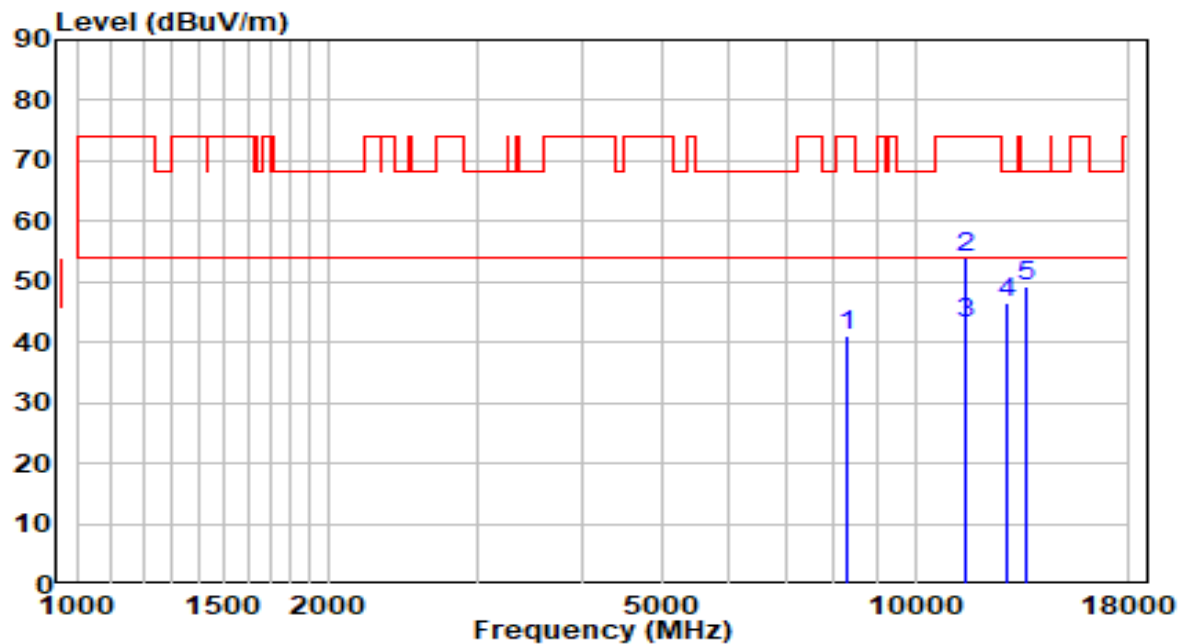


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8293.000	28.55	12.49	41.04	-32.96	74.00	Peak
2	11489.000	35.65	18.44	54.09	-19.91	74.00	Peak
3	11489.000	24.77	18.44	43.20	-10.80	54.00	Average
4	12866.000	27.52	18.92	46.44	-21.76	68.20	Peak
5	* 13580.000	28.53	20.71	49.24	-18.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

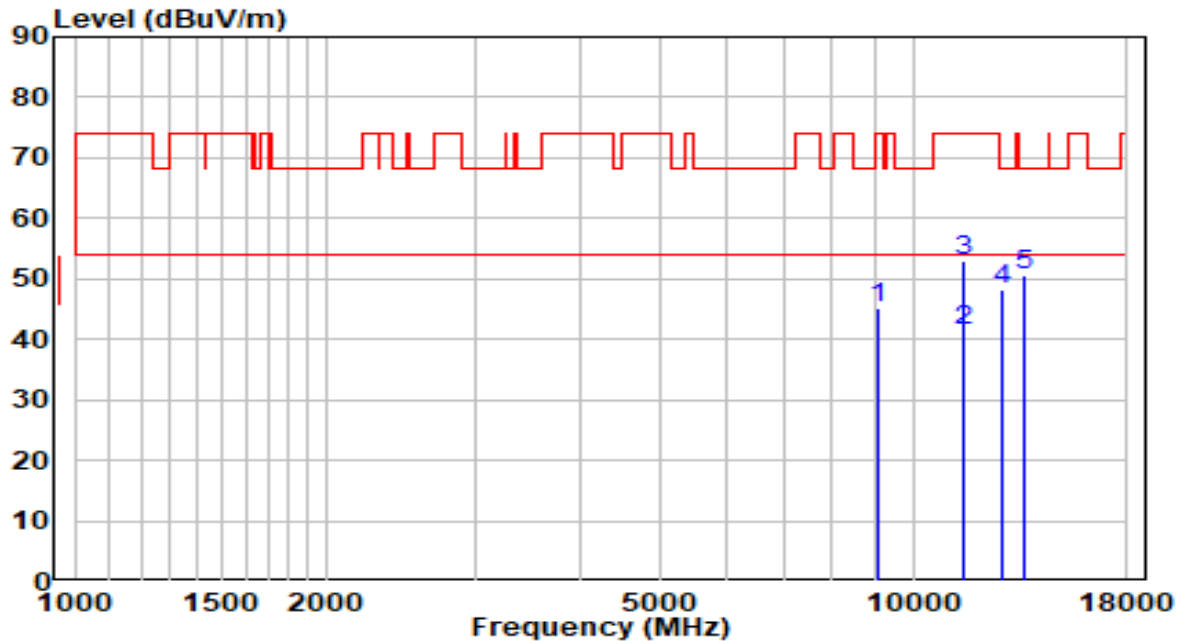


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9109.000	31.29	13.84	45.13	-28.87	74.00	Peak
2	* 11488.400	22.97	18.43	41.40	-12.60	54.00	Average
3	11489.000	34.66	18.44	53.10	-20.90	74.00	Peak
4	12764.000	29.49	18.64	48.13	-20.07	68.20	Peak
5	13546.000	29.85	20.64	50.49	-17.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz - CDD Mode	Test Voltage	110V/60Hz

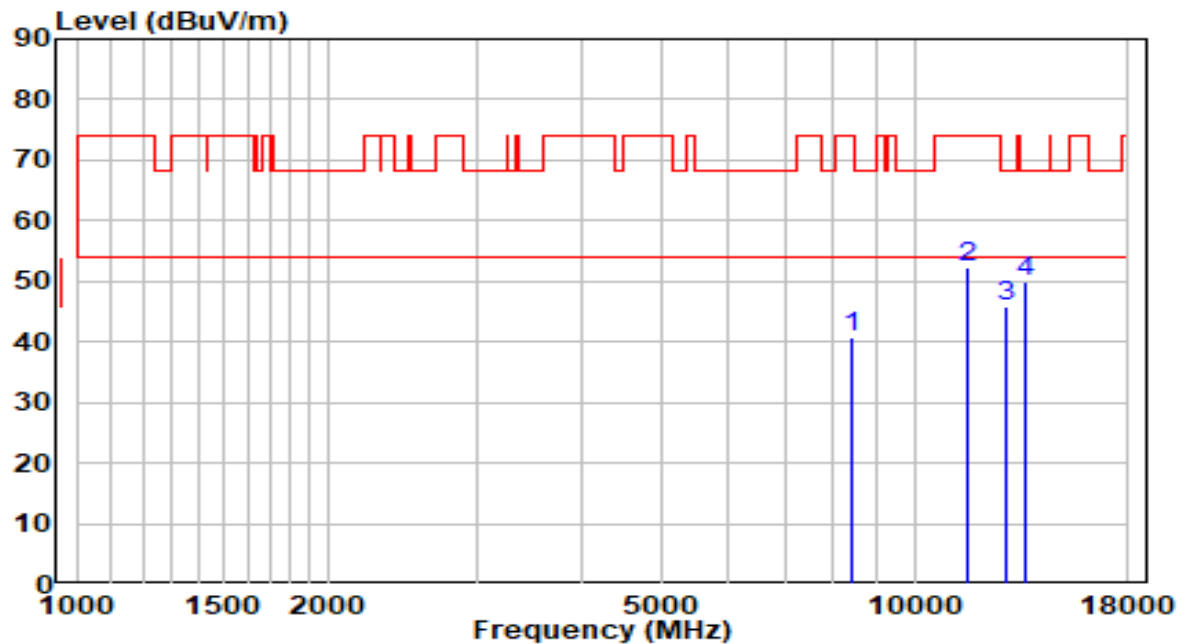


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8395.000	32.17	8.73	40.90	-33.10	74.00	Peak
2	11574.000	36.37	16.07	52.43	-21.57	74.00	Peak
3	12866.000	30.50	15.51	46.01	-22.19	68.20	Peak
4	* 13554.500	29.99	19.87	49.86	-18.34	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz - CDD Mode	Test Voltage	110V/60Hz

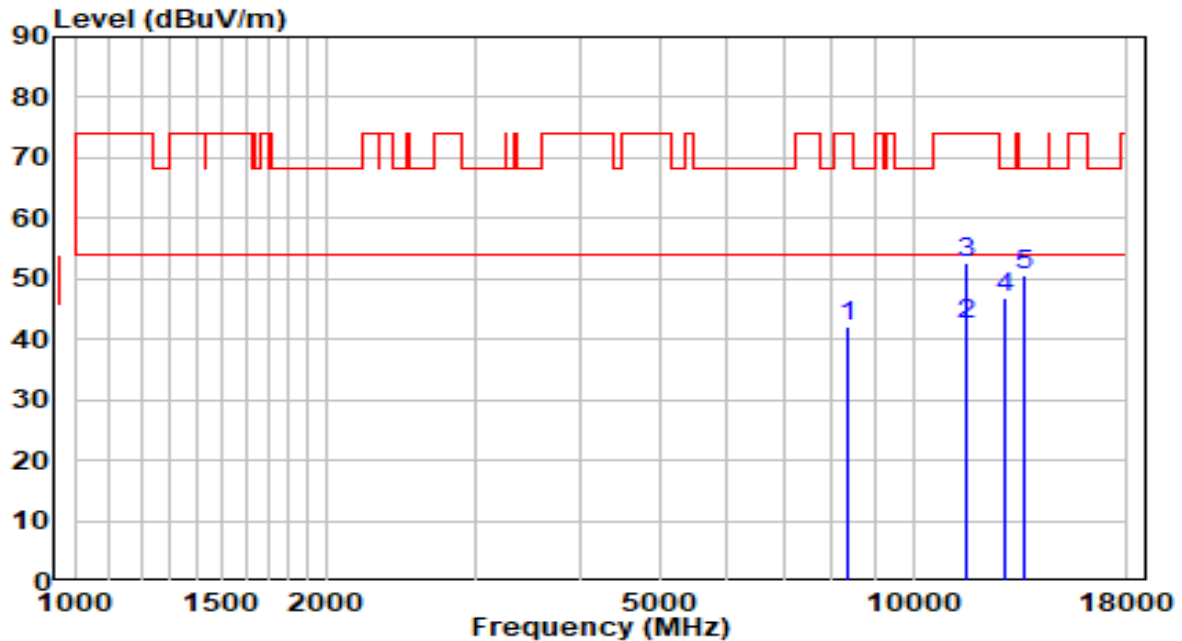


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8352.500	29.64	12.48	42.12	-31.88	74.00	Peak
2	* 11565.500	24.11	18.37	42.48	-11.52	54.00	Average
3	11574.000	34.30	18.36	52.66	-21.34	74.00	Peak
4	12908.500	27.92	19.04	46.96	-21.24	68.20	Peak
5	13605.500	29.94	20.76	50.70	-17.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

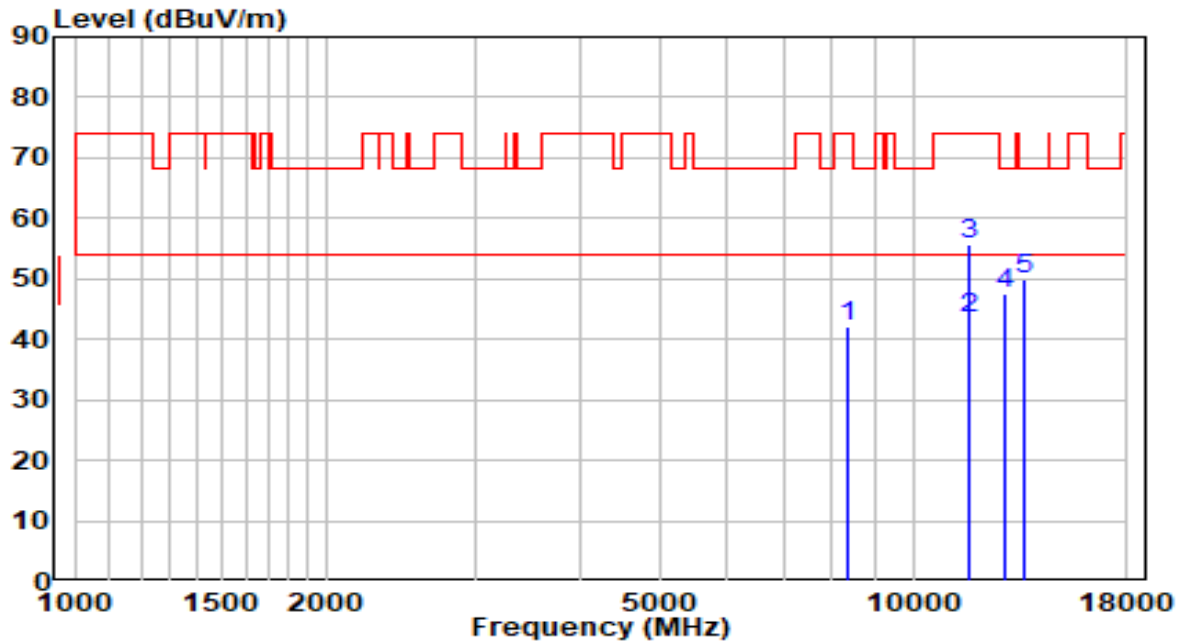


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8335.500	29.66	12.48	42.14	-31.86	74.00	Peak
2	* 11648.350	25.13	18.26	43.39	-10.61	54.00	Average
3	11650.500	37.32	18.26	55.58	-18.42	74.00	Peak
4	12857.500	28.60	18.90	47.49	-20.71	68.20	Peak
5	13571.500	29.11	20.69	49.80	-18.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

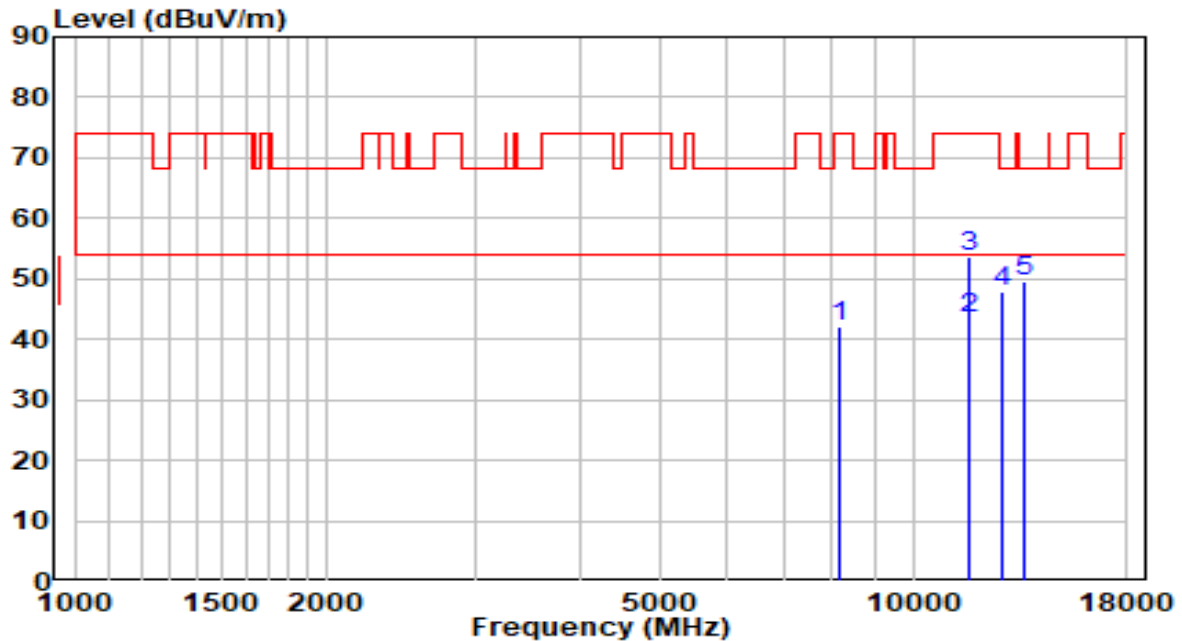


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8174.000	29.75	12.50	42.25	-31.75	74.00	Peak
2	* 11648.050	25.15	18.26	43.41	-10.59	54.00	Average
3	11650.500	35.51	18.26	53.77	-20.23	74.00	Peak
4	12806.500	29.00	18.75	47.75	-20.45	68.20	Peak
5	13520.500	28.92	20.59	49.51	-18.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

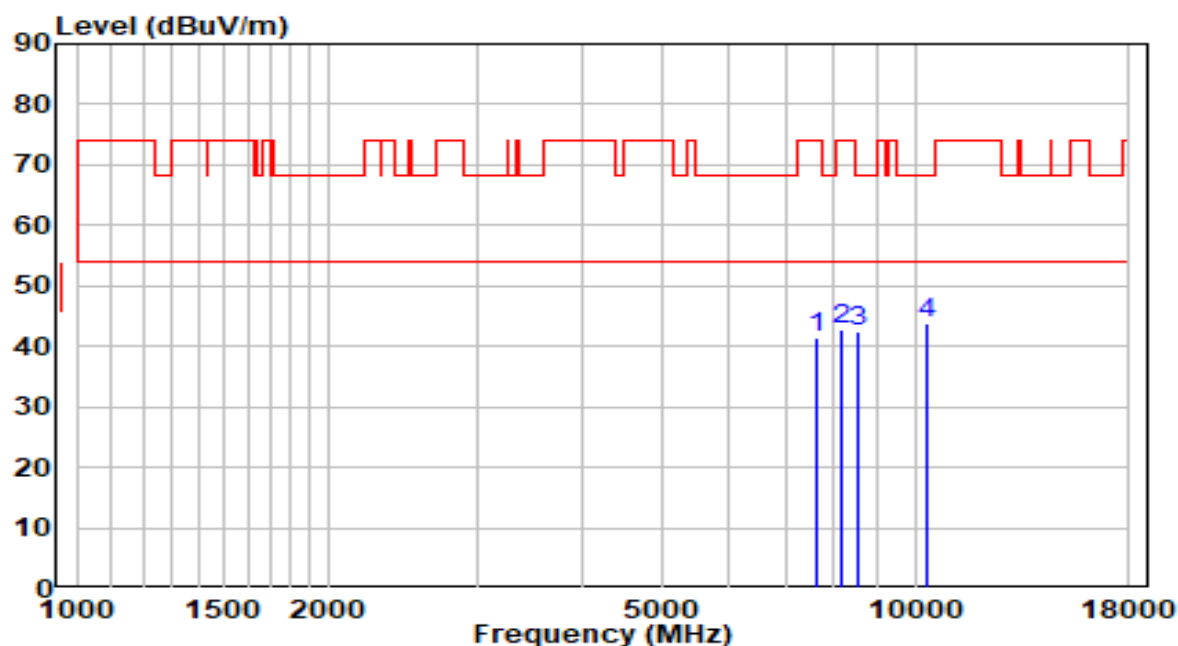


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	29.52	11.93	41.45	-32.55	74.00	Peak
2	8174.000	30.13	12.50	42.63	-31.37	74.00	Peak
3	8573.500	29.98	12.64	42.61	-25.59	68.20	Peak
4	* 10299.000	27.60	16.38	43.98	-24.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

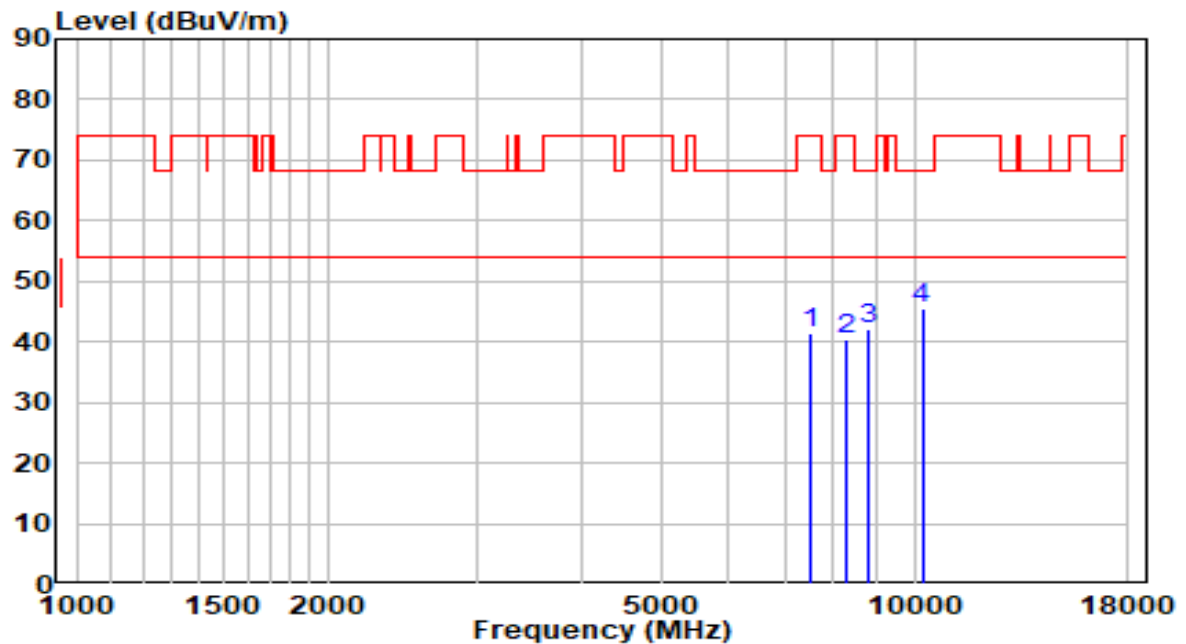


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	33.54	7.93	41.47	-32.53	74.00	Peak
2	8310.000	32.15	8.36	40.51	-33.49	74.00	Peak
3	8828.500	32.22	9.80	42.02	-26.18	68.20	Peak
4	* 10214.000	33.55	11.99	45.53	-22.67	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

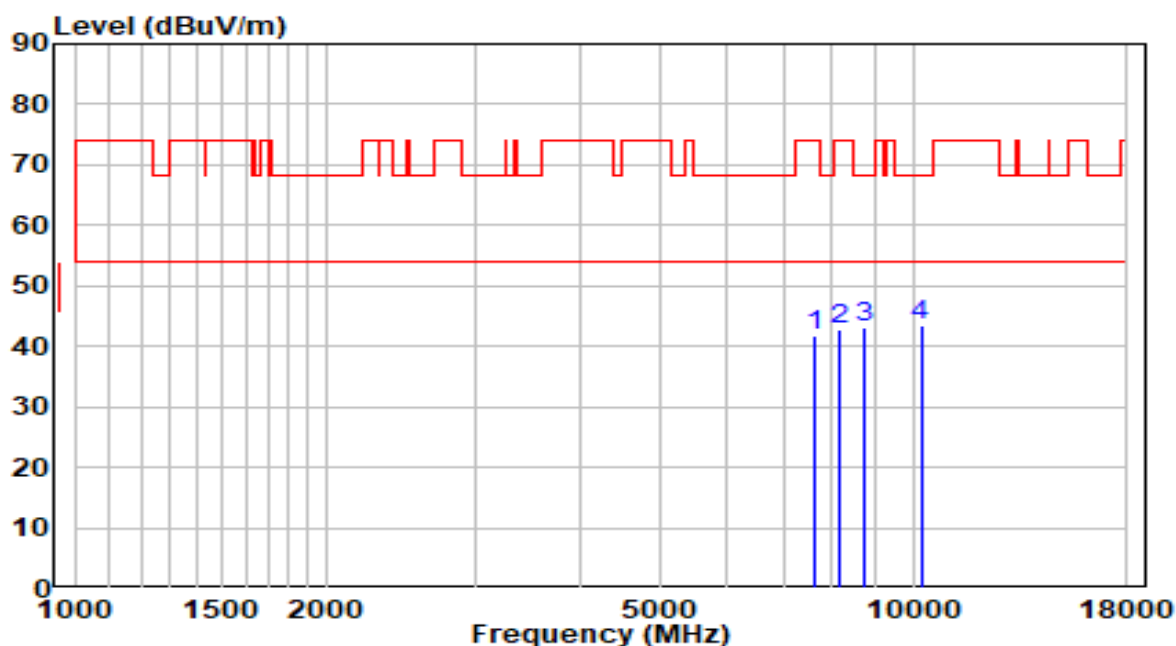


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	29.72	11.93	41.65	-32.35	74.00	Peak
2	8174.000	30.17	12.50	42.67	-31.33	74.00	Peak
3	8718.000	29.99	12.99	42.98	-25.22	68.20	Peak
4	* 10214.000	27.51	16.09	43.60	-24.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

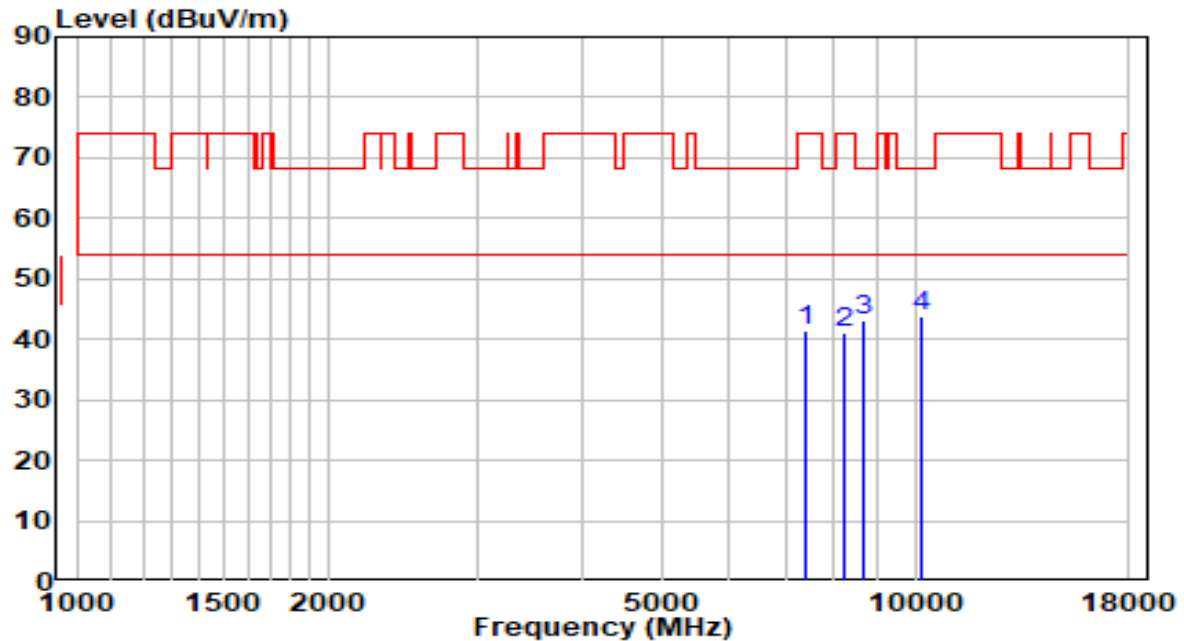


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7426.000	29.91	11.51	41.42	-32.58	74.00	Peak
2	8225.000	28.74	12.50	41.23	-32.77	74.00	Peak
3	8701.000	30.08	12.95	43.03	-25.17	68.20	Peak
4	* 10171.500	27.79	15.95	43.74	-24.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz - CDD Mode	Test Voltage	110V/60Hz

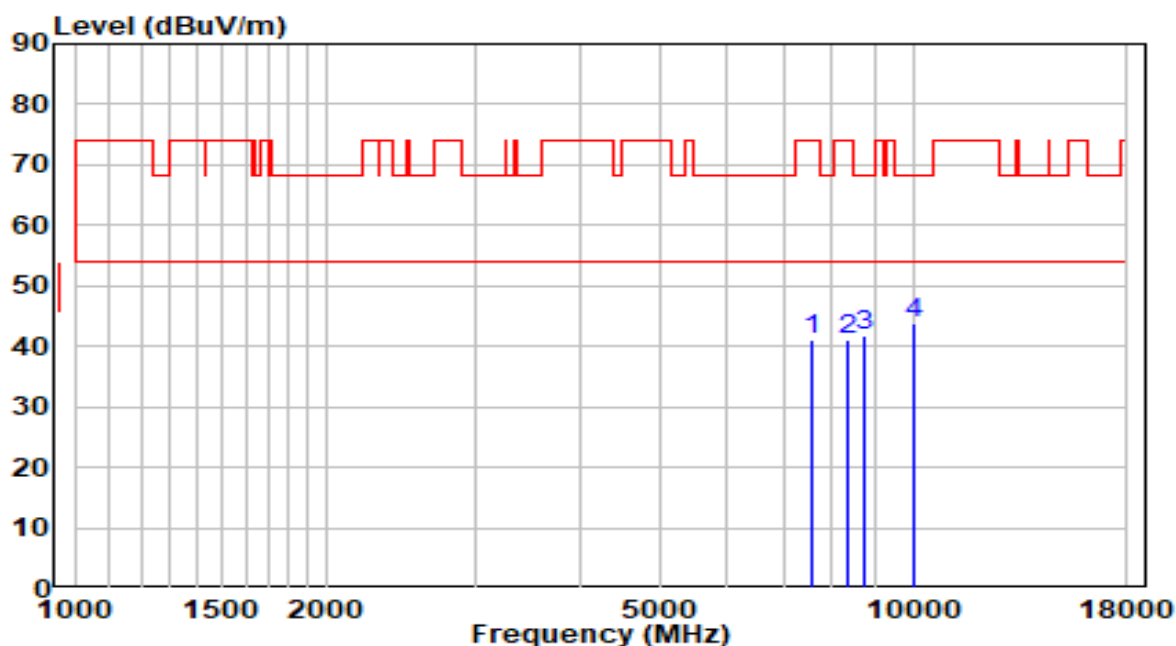


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7553.500	29.44	11.80	41.24	-32.76	74.00	Peak
2	8361.000	28.60	12.48	41.08	-32.92	74.00	Peak
3	8769.000	28.81	13.11	41.93	-26.27	68.20	Peak
4	* 10044.000	28.44	15.51	43.95	-24.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz - CDD Mode	Test Voltage	110V/60Hz

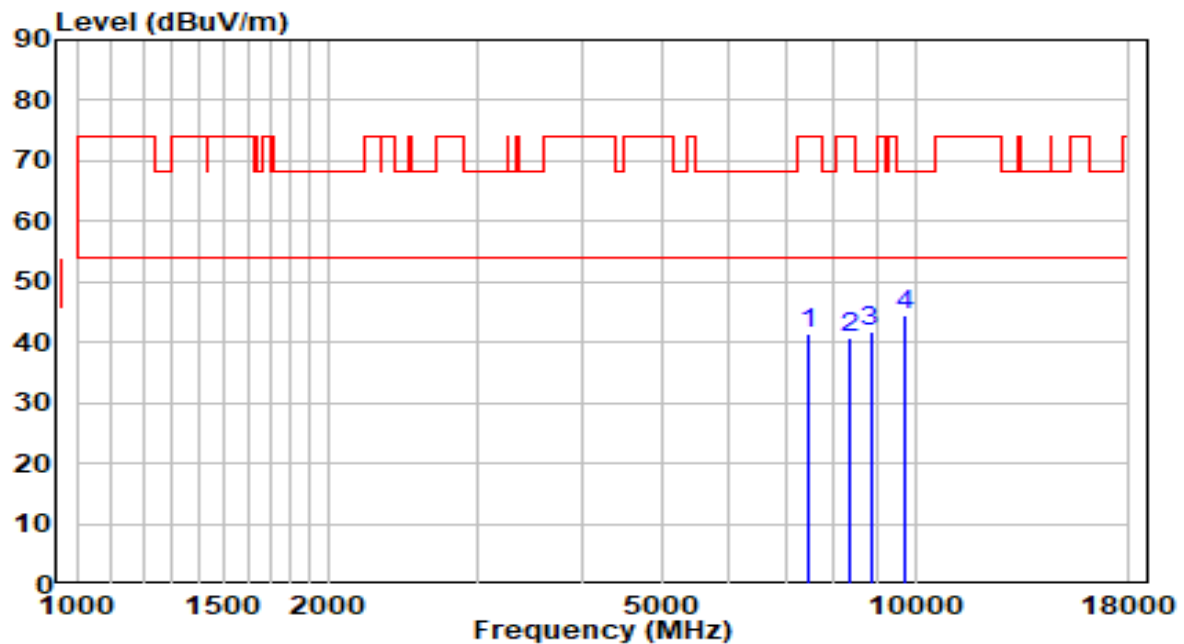


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	29.87	11.55	41.42	-32.58	74.00	Peak
2	8344.000	28.28	12.48	40.75	-33.25	74.00	Peak
3	8845.500	28.45	13.30	41.75	-26.45	68.20	Peak
4	* 9738.000	29.62	14.87	44.49	-23.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

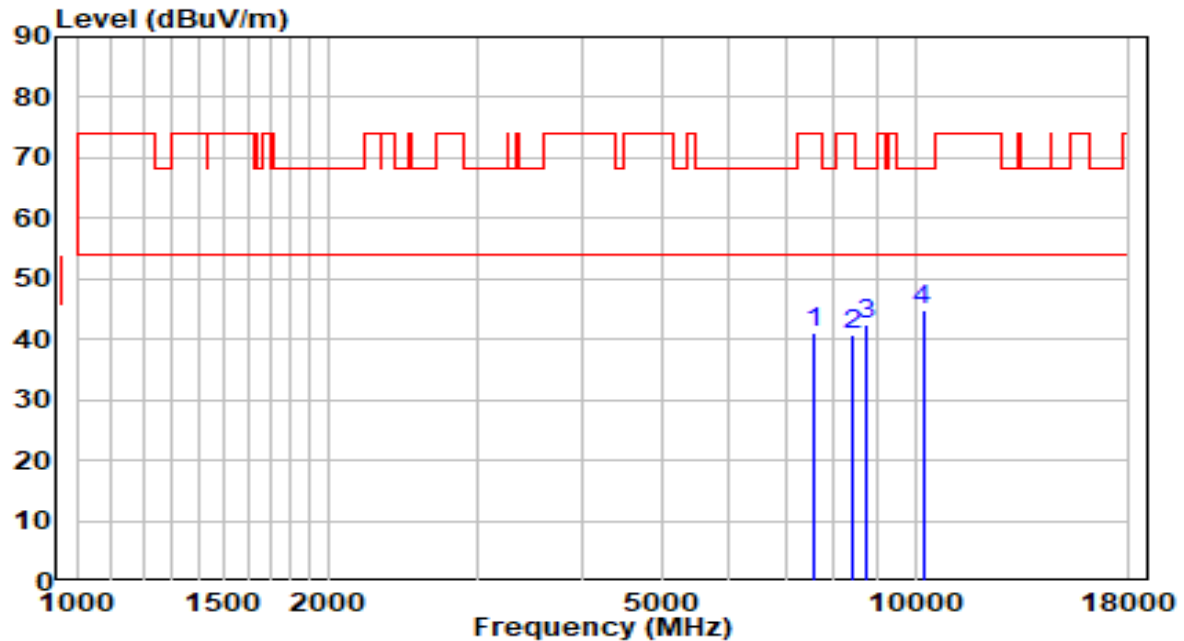


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	29.30	11.83	41.13	-32.87	74.00	Peak
2	8412.000	28.39	12.47	40.85	-33.15	74.00	Peak
3	8735.000	29.27	13.03	42.30	-25.90	68.20	Peak
4	* 10214.000	28.66	16.09	44.75	-23.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

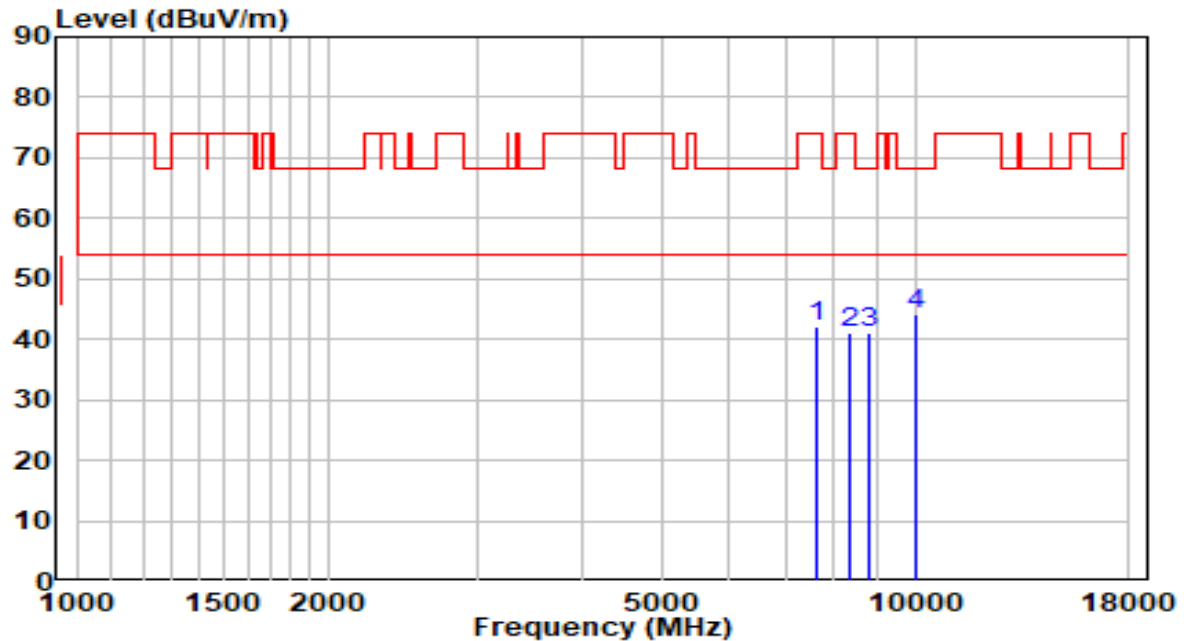


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	30.12	11.95	42.08	-31.92	74.00	Peak
2	8361.000	28.75	12.48	41.22	-32.78	74.00	Peak
3	8811.500	28.02	13.22	41.24	-26.96	68.20	Peak
4	* 10001.500	28.67	15.37	44.04	-24.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

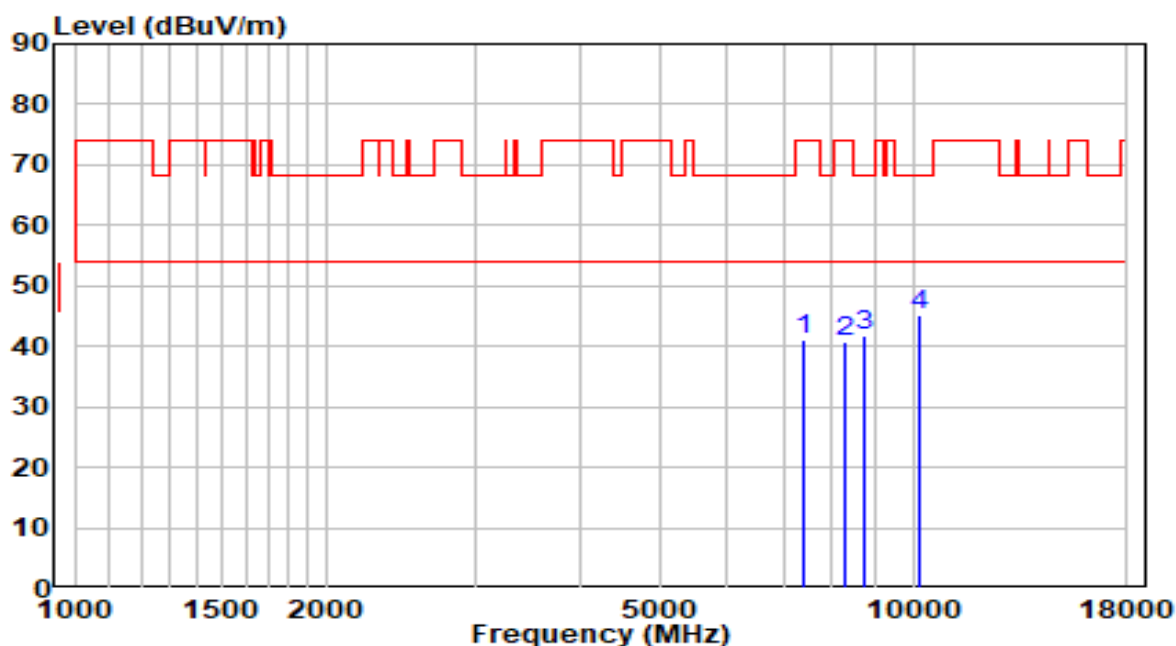


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7400.500	29.72	11.43	41.15	-32.85	74.00	Peak
2	8293.000	28.43	12.49	40.91	-33.09	74.00	Peak
3	8718.000	28.88	12.99	41.87	-26.33	68.20	Peak
4	* 10171.500	29.35	15.95	45.30	-22.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

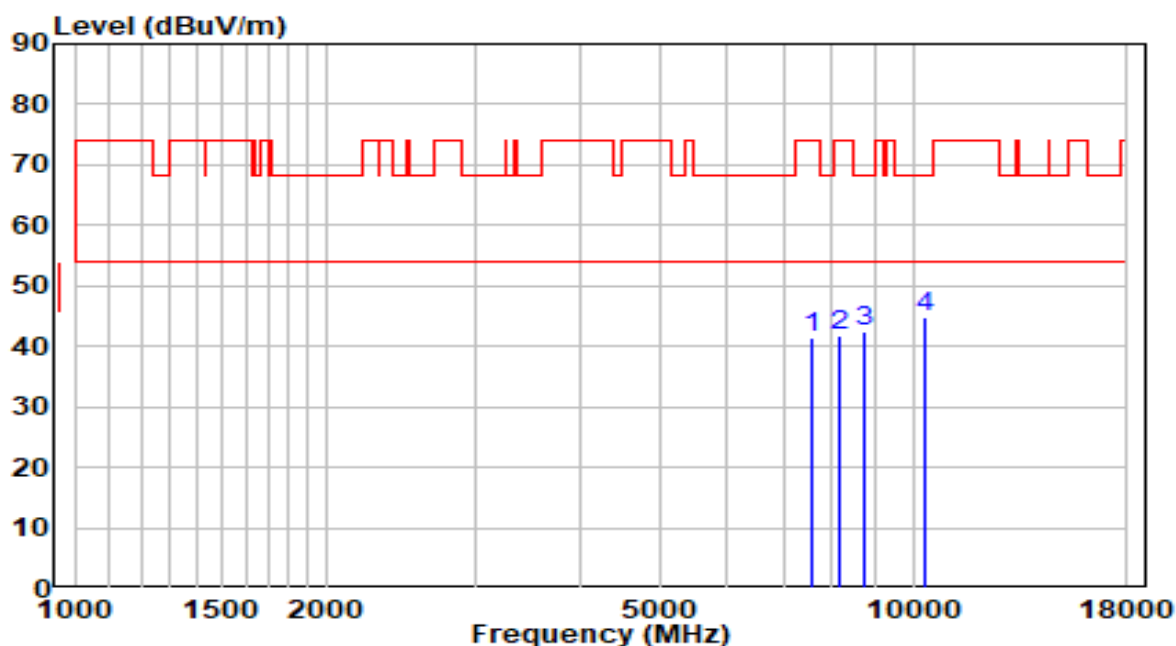


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7587.500	29.59	11.86	41.45	-32.55	74.00	Peak
2	8191.000	29.29	12.50	41.79	-32.21	74.00	Peak
3	8718.000	29.38	12.99	42.37	-25.83	68.20	Peak
4	* 10299.000	28.48	16.38	44.86	-23.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz - CDD Mode	Test Voltage	110V/60Hz

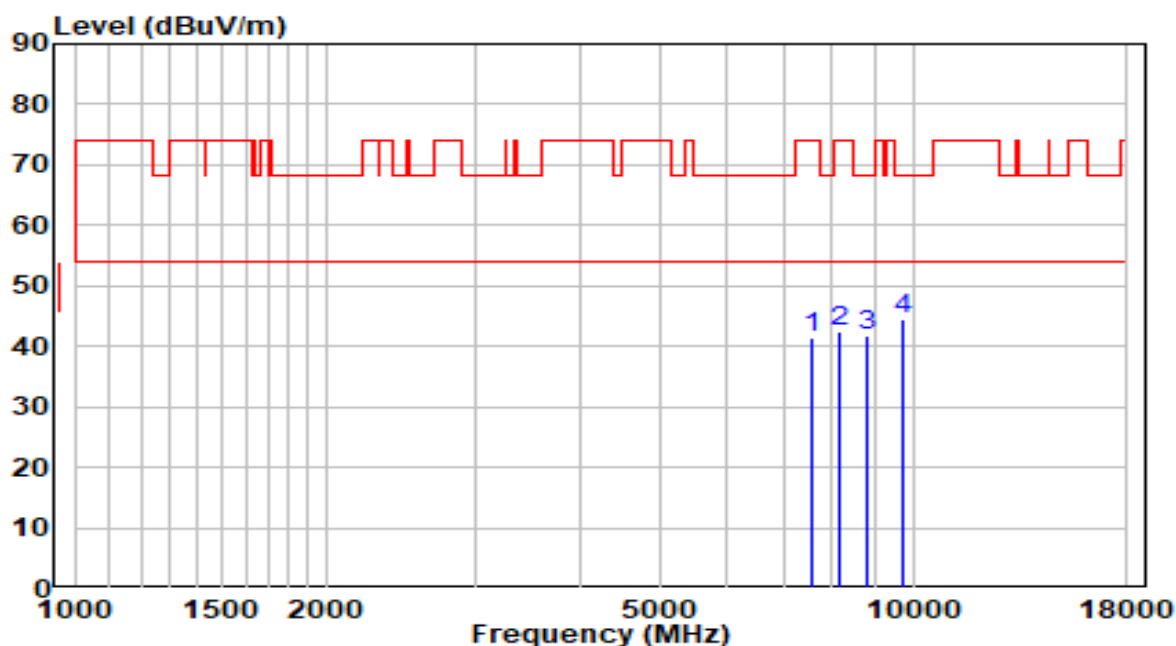


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	29.66	11.80	41.47	-32.53	74.00	Peak
2	8174.000	29.82	12.50	42.32	-31.68	74.00	Peak
3	8794.500	28.52	13.18	41.70	-26.50	68.20	Peak
4	* 9712.500	29.75	14.82	44.57	-23.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz - CDD Mode	Test Voltage	110V/60Hz

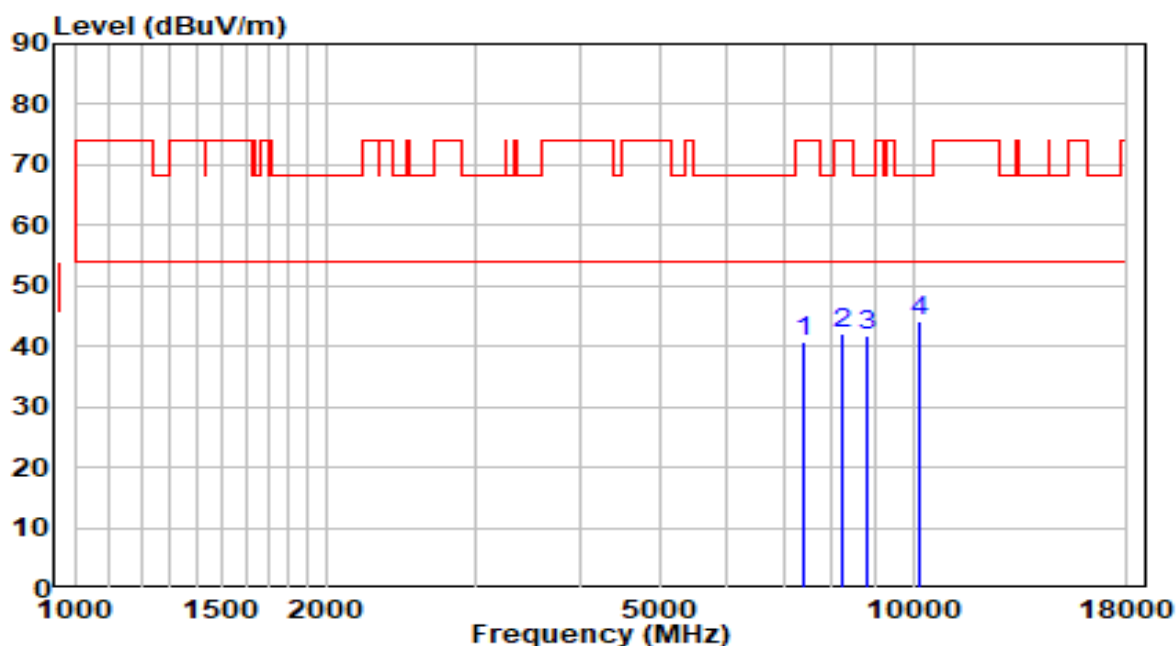


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7409.000	29.19	11.46	40.65	-33.35	74.00	Peak
2	8242.000	29.69	12.49	42.19	-31.81	74.00	Peak
3	8828.500	28.47	13.26	41.73	-26.47	68.20	Peak
4	* 10171.500	28.05	15.95	43.99	-24.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz - CDD Mode	Test Voltage	110V/60Hz

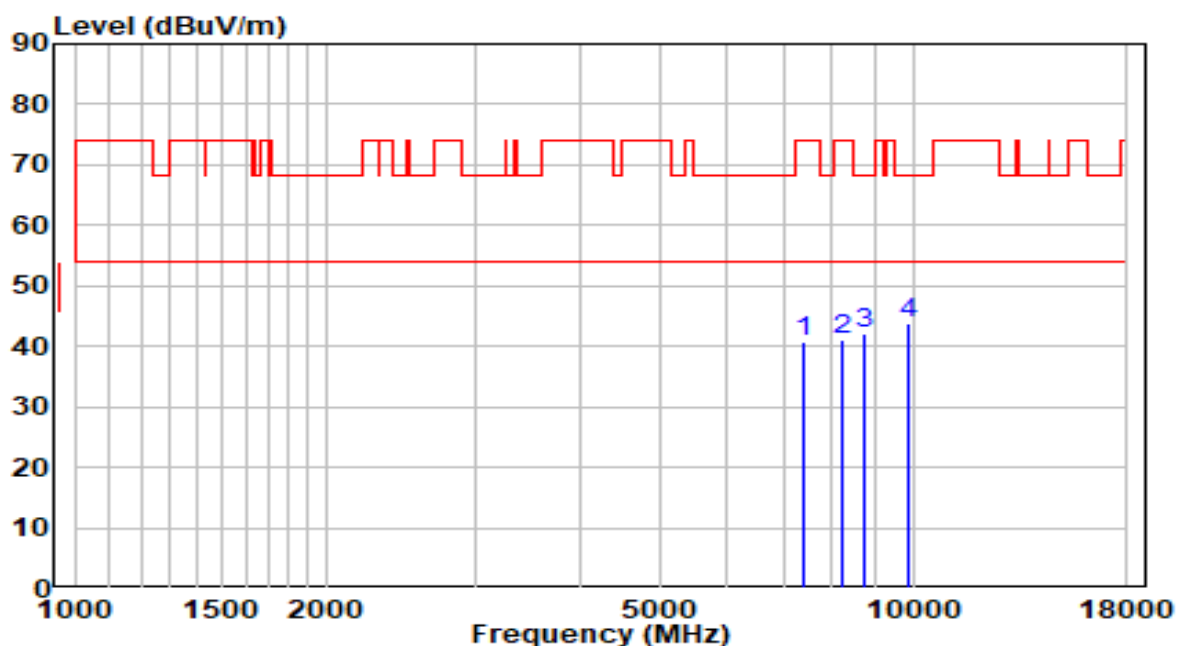


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7409.000	29.16	11.46	40.62	-33.38	74.00	Peak
2	8259.000	28.66	12.49	41.15	-32.85	74.00	Peak
3	8718.000	29.00	12.99	41.98	-26.22	68.20	Peak
4	* 9840.000	28.60	15.06	43.66	-24.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz - CDD Mode	Test Voltage	110V/60Hz

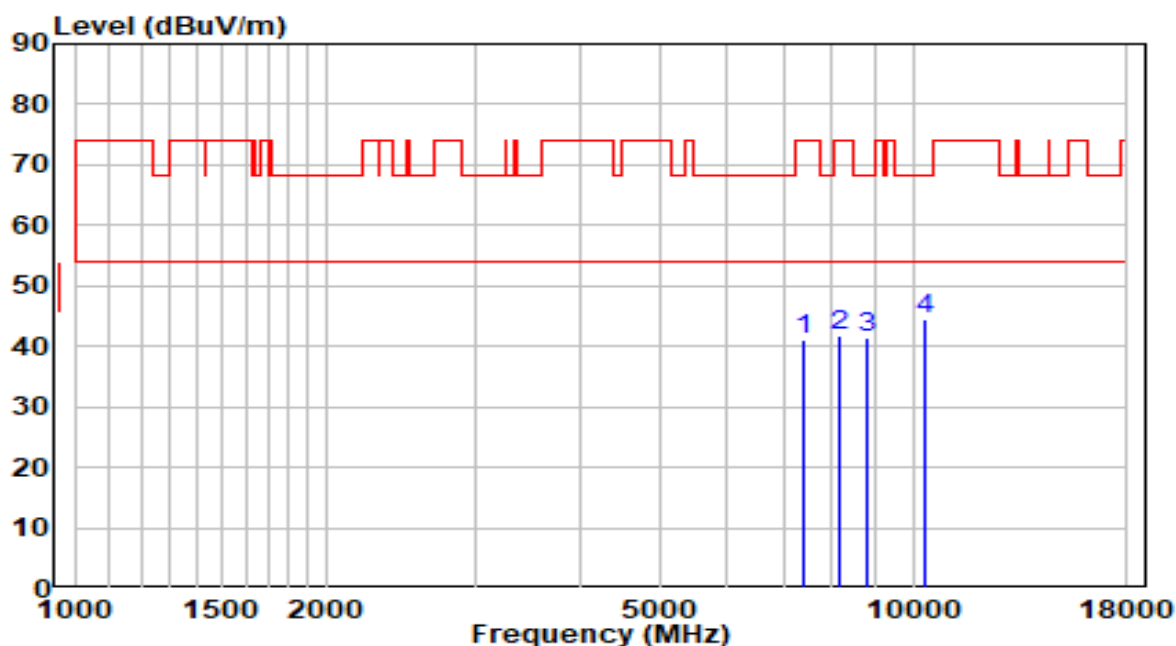


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7426.000	29.53	11.51	41.03	-32.97	74.00	Peak
2	8191.000	29.26	12.50	41.76	-32.24	74.00	Peak
3	8828.500	28.24	13.26	41.50	-26.70	68.20	Peak
4	* 10299.000	27.99	16.38	44.37	-23.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz - CDD Mode	Test Voltage	110V/60Hz

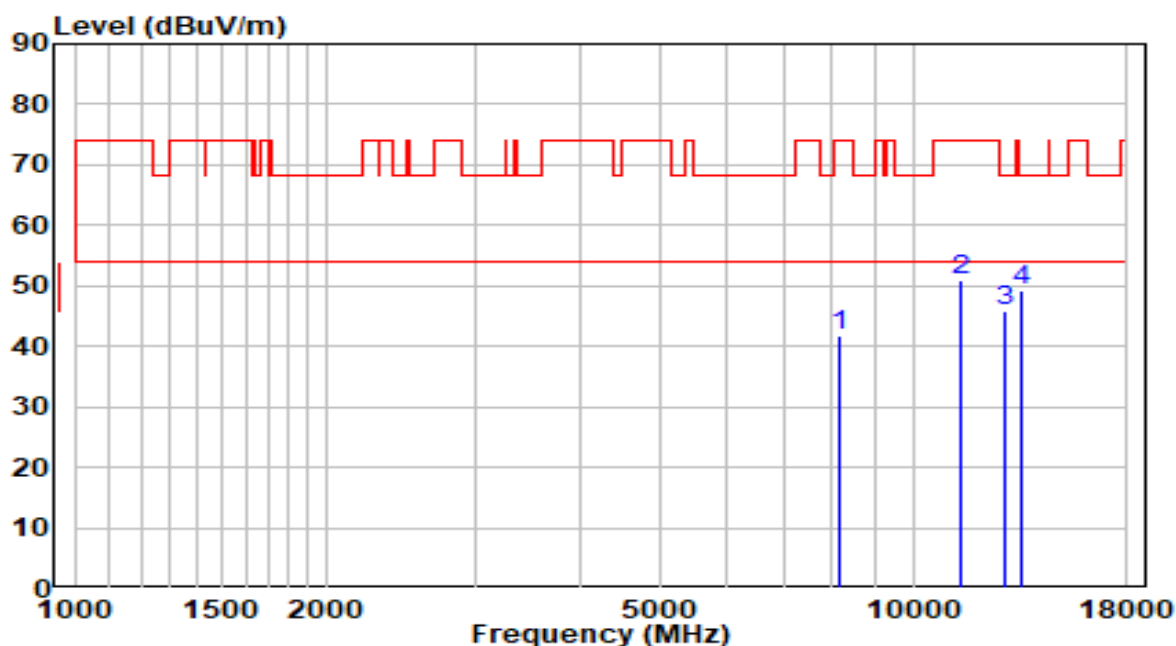


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8182.500	29.14	12.50	41.65	-32.35	74.00	Peak
2	11421.000	32.67	18.34	51.01	-22.99	74.00	Peak
3	12823.500	26.99	18.80	45.80	-22.40	68.20	Peak
4	* 13503.500	28.72	20.56	49.28	-18.92	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz - CDD Mode	Test Voltage	110V/60Hz

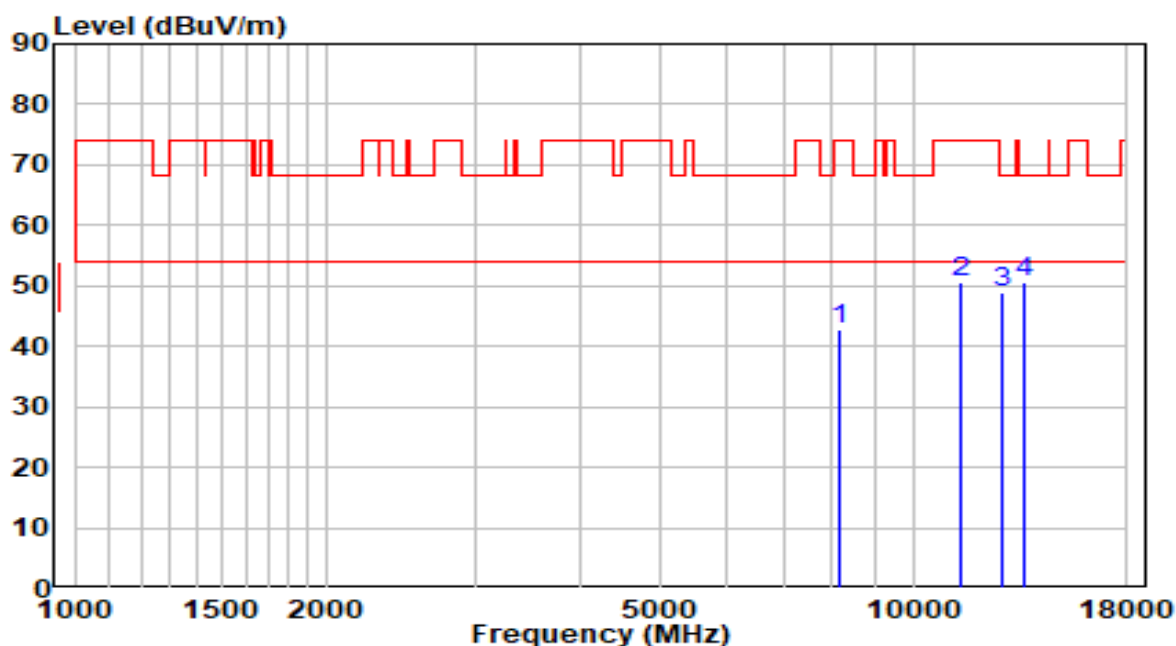


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8140.000	30.19	12.51	42.70	-31.30	74.00	Peak
2	11421.000	32.17	18.34	50.52	-23.48	74.00	Peak
3	12806.500	30.06	18.75	48.82	-19.38	68.20	Peak
4	* 13580.000	29.78	20.71	50.49	-17.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz - CDD Mode	Test Voltage	110V/60Hz

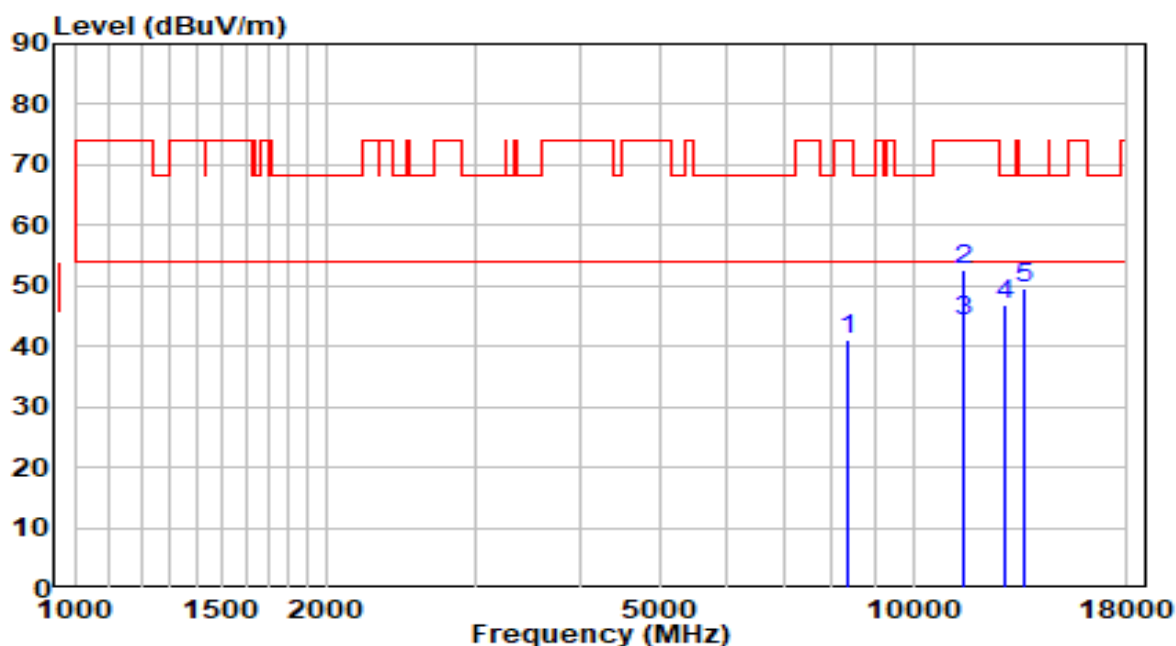


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8344.000	28.49	12.48	40.96	-33.04	74.00	Peak
2	11523.000	34.26	18.42	52.68	-21.32	74.00	Peak
3	* 11524.000	25.65	18.42	44.07	-9.93	54.00	Average
4	12840.500	27.93	18.85	46.78	-21.42	68.20	Peak
5	13529.000	29.04	20.61	49.65	-18.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz - CDD Mode	Test Voltage	110V/60Hz

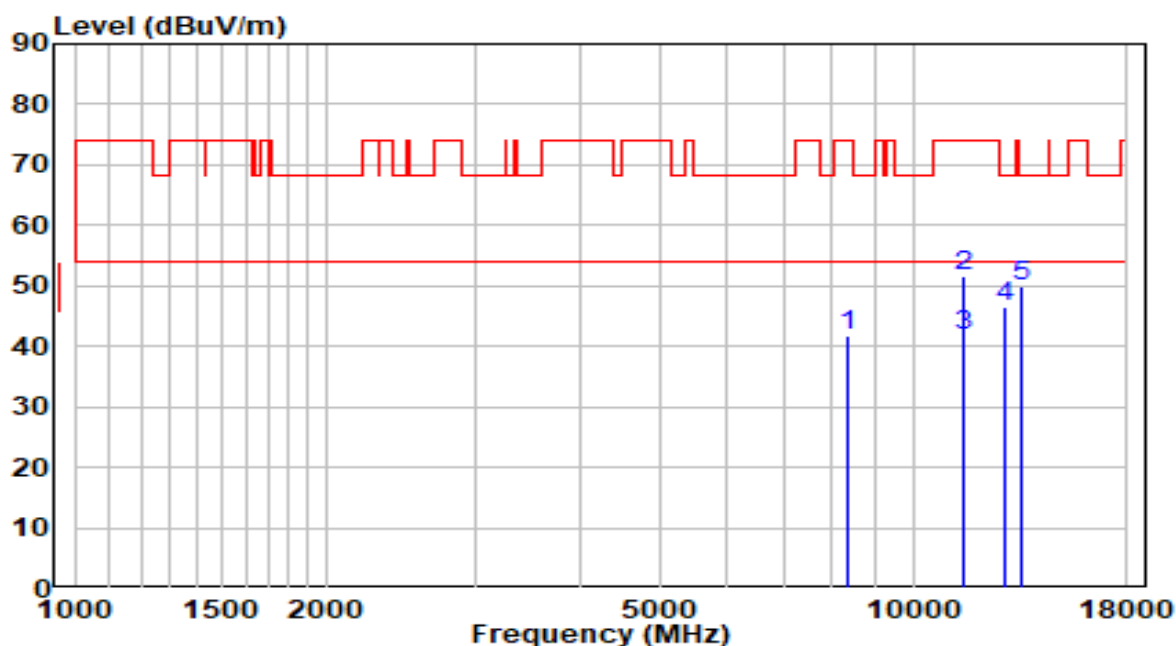


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8386.500	29.31	12.47	41.78	-32.22	74.00	Peak
2	11506.000	33.28	18.44	51.73	-22.27	74.00	Peak
3	* 11506.500	23.49	18.44	41.93	-12.07	54.00	Average
4	12900.000	27.49	19.01	46.50	-21.70	68.20	Peak
5	13512.000	29.31	20.58	49.89	-18.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz - CDD Mode	Test Voltage	110V/60Hz

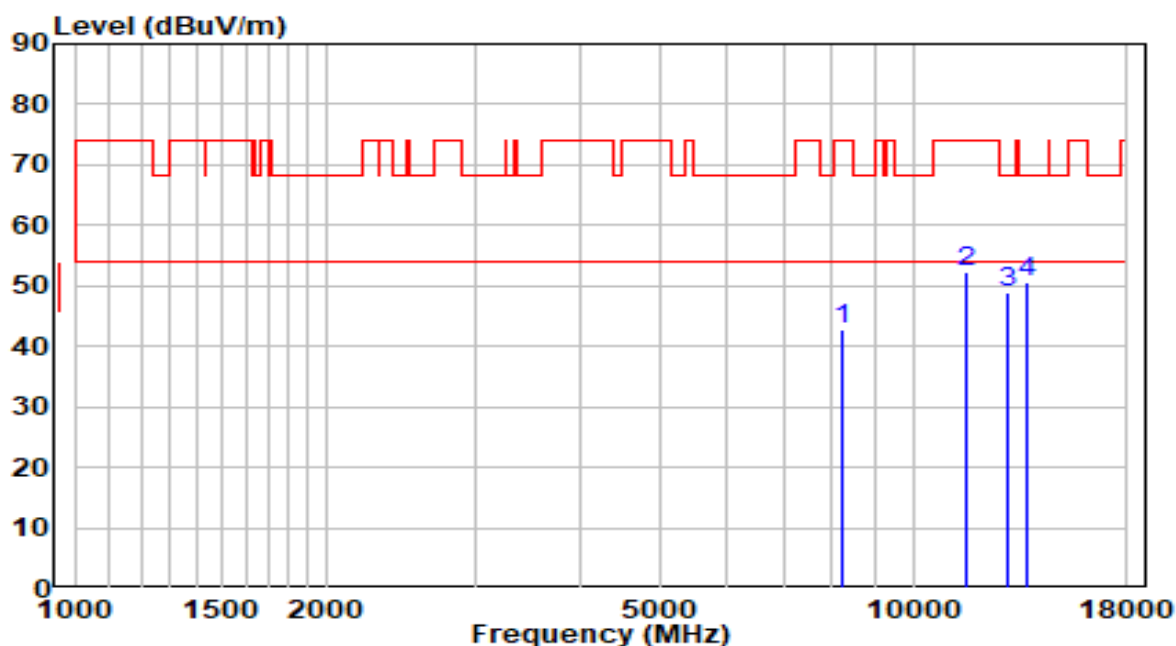


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8208.000	30.30	12.50	42.80	-31.20	74.00	Peak
2	11591.000	33.93	18.34	52.26	-21.74	74.00	Peak
3	12976.500	29.72	19.22	48.95	-19.25	68.20	Peak
4	* 13622.500	29.74	20.79	50.53	-17.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz - CDD Mode	Test Voltage	110V/60Hz

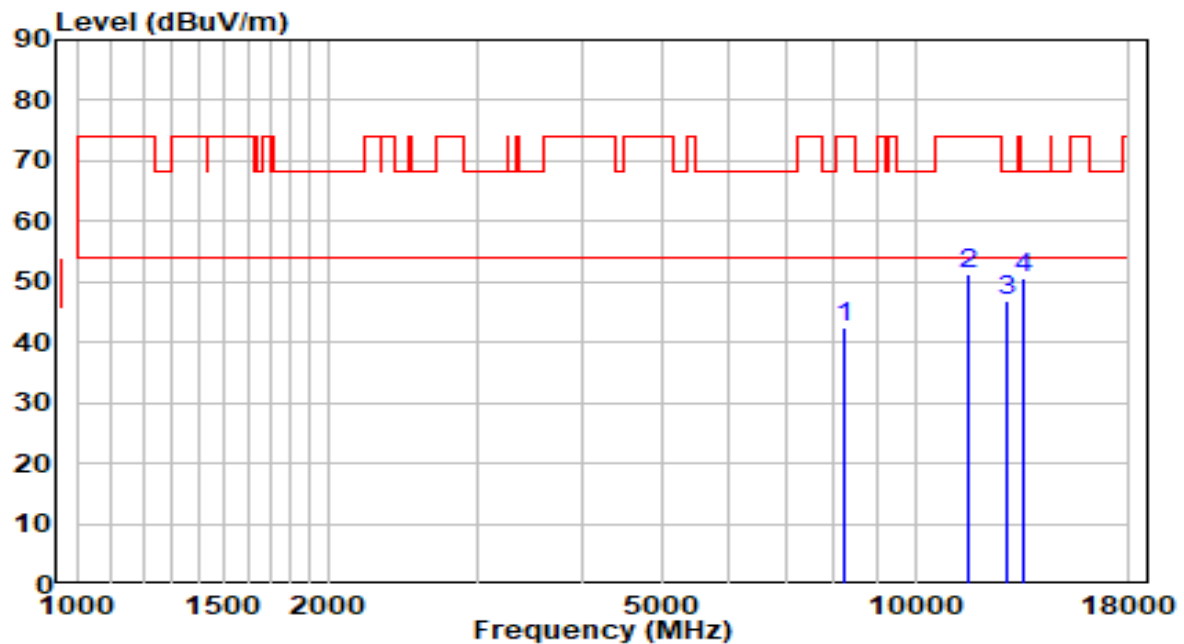


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8250.500	29.87	12.49	42.36	-31.64	74.00	Peak
2	11574.000	33.06	18.36	51.42	-22.58	74.00	Peak
3	12849.000	27.92	18.87	46.79	-21.41	68.20	Peak
4	* 13469.500	30.06	20.48	50.54	-17.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

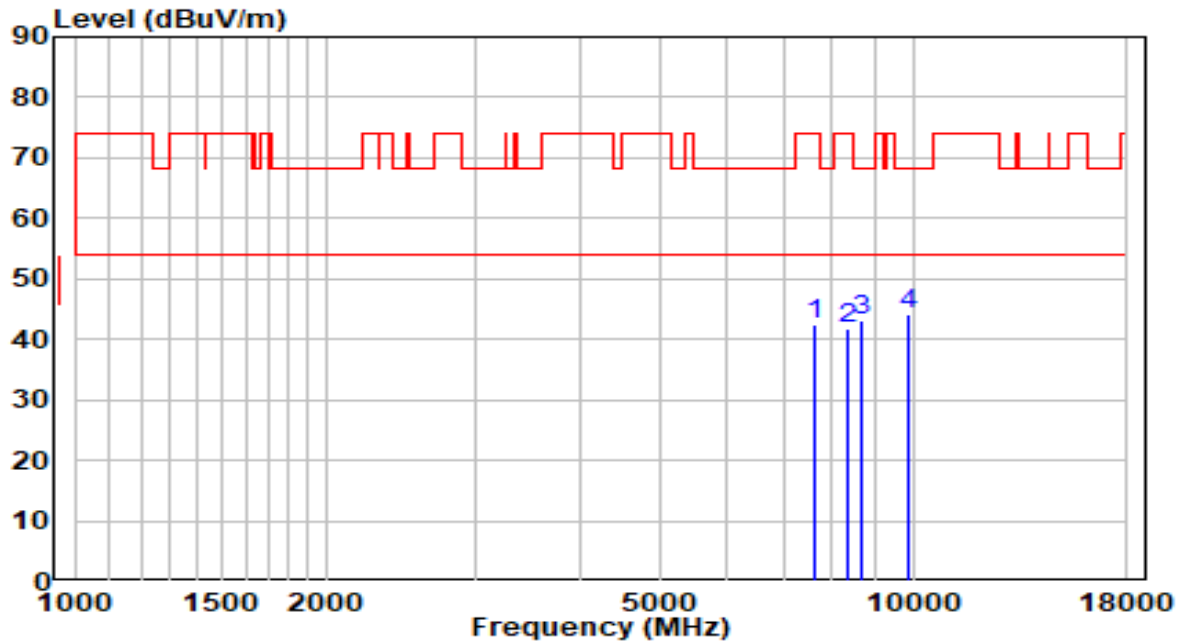


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	30.39	11.93	42.31	-31.69	74.00	Peak
2	8369.500	29.44	12.47	41.92	-32.08	74.00	Peak
3	8701.000	30.27	12.95	43.22	-24.98	68.20	Peak
4	* 9882.500	28.90	15.14	44.04	-24.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

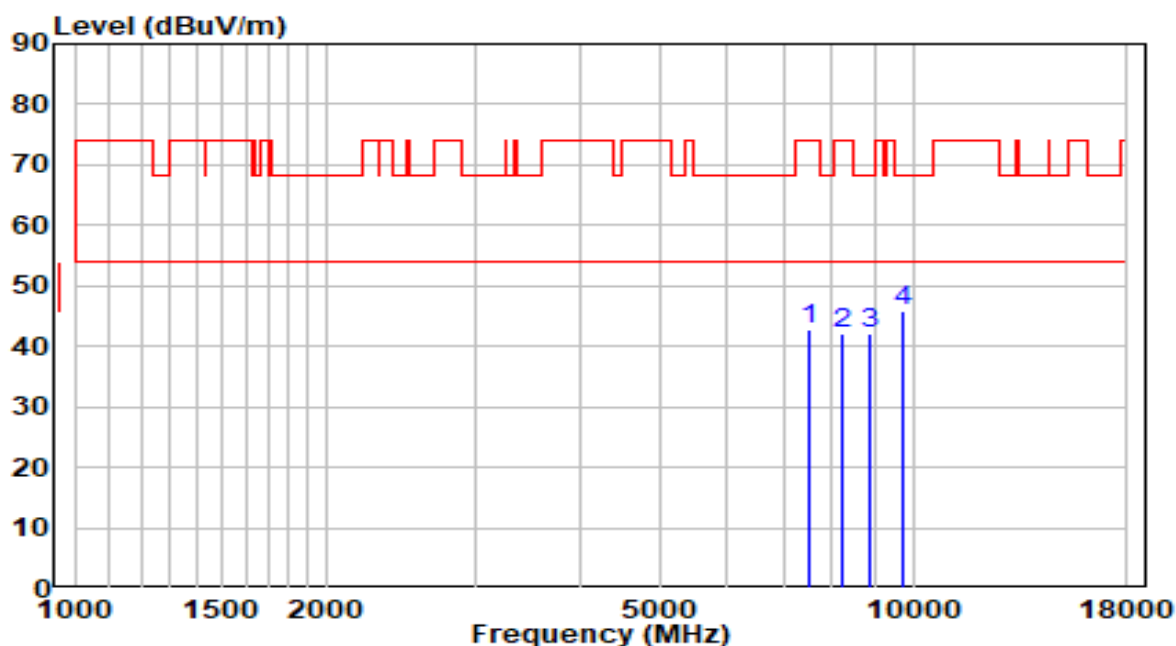


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	30.94	11.73	42.67	-31.33	74.00	Peak
2	8259.000	29.51	12.49	42.00	-32.00	74.00	Peak
3	8862.500	28.88	13.34	42.23	-25.97	68.20	Peak
4	* 9746.500	30.86	14.88	45.74	-22.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

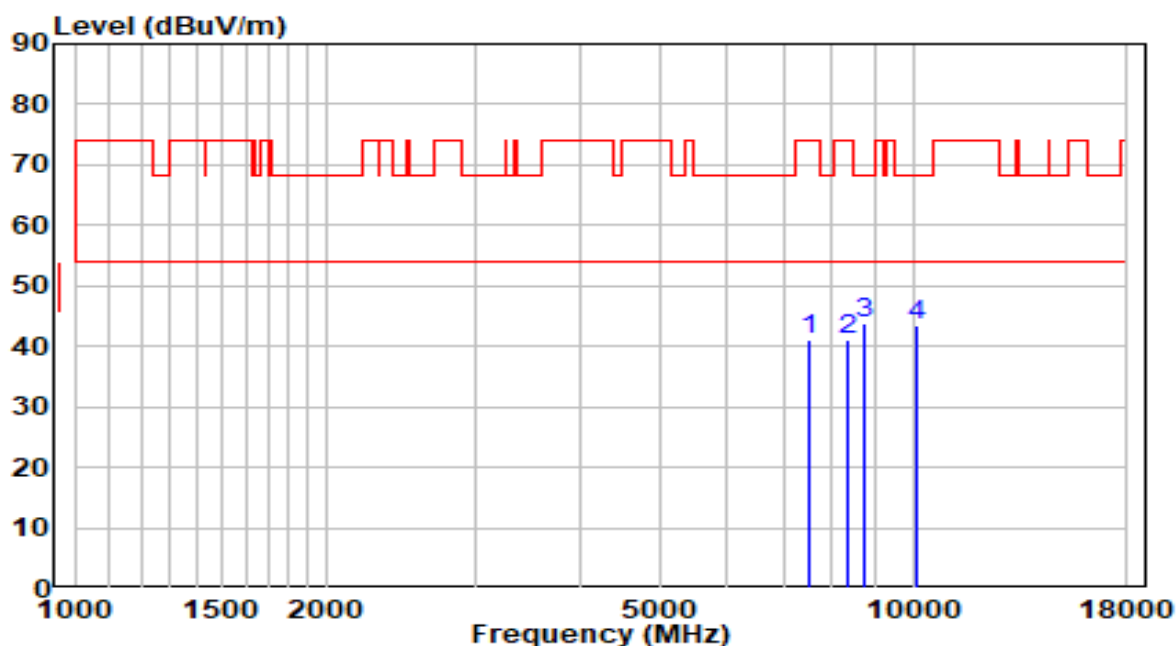


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	29.24	11.75	40.99	-33.01	74.00	Peak
2	8327.000	28.75	12.48	41.23	-32.77	74.00	Peak
3	* 8769.000	30.66	13.11	43.78	-24.42	68.20	Peak
4	10069.500	27.82	15.60	43.42	-24.78	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

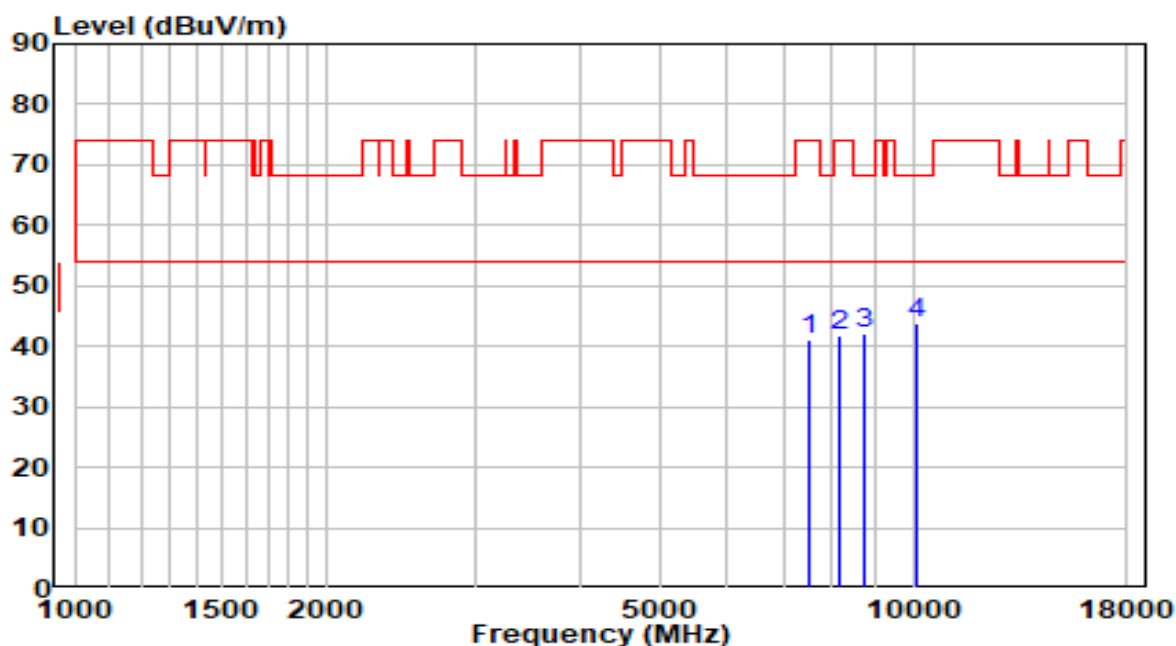


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	29.32	11.75	41.06	-32.94	74.00	Peak
2	8191.000	29.12	12.50	41.62	-32.38	74.00	Peak
3	8718.000	29.04	12.99	42.03	-26.17	68.20	Peak
4	* 10103.500	28.06	15.71	43.78	-24.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

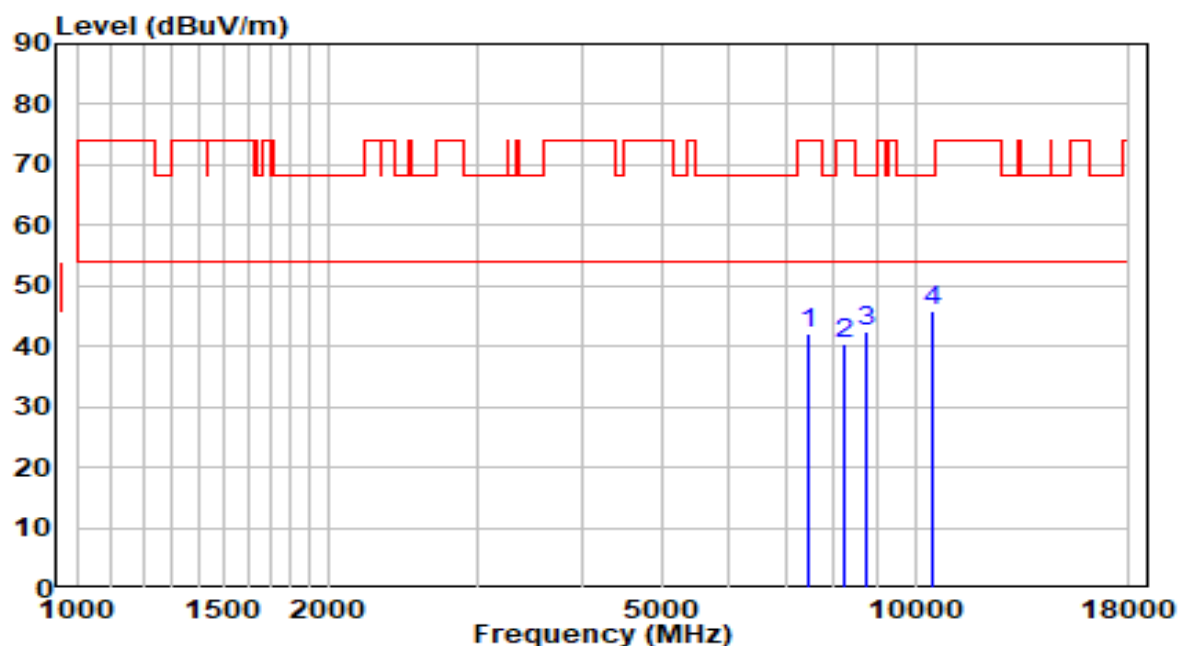


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	30.60	11.60	42.20	-31.80	74.00	Peak
2	8259.000	27.80	12.49	40.30	-33.70	74.00	Peak
3	8752.000	29.46	13.07	42.54	-25.66	68.20	Peak
4	* 10494.500	28.67	17.05	45.72	-22.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

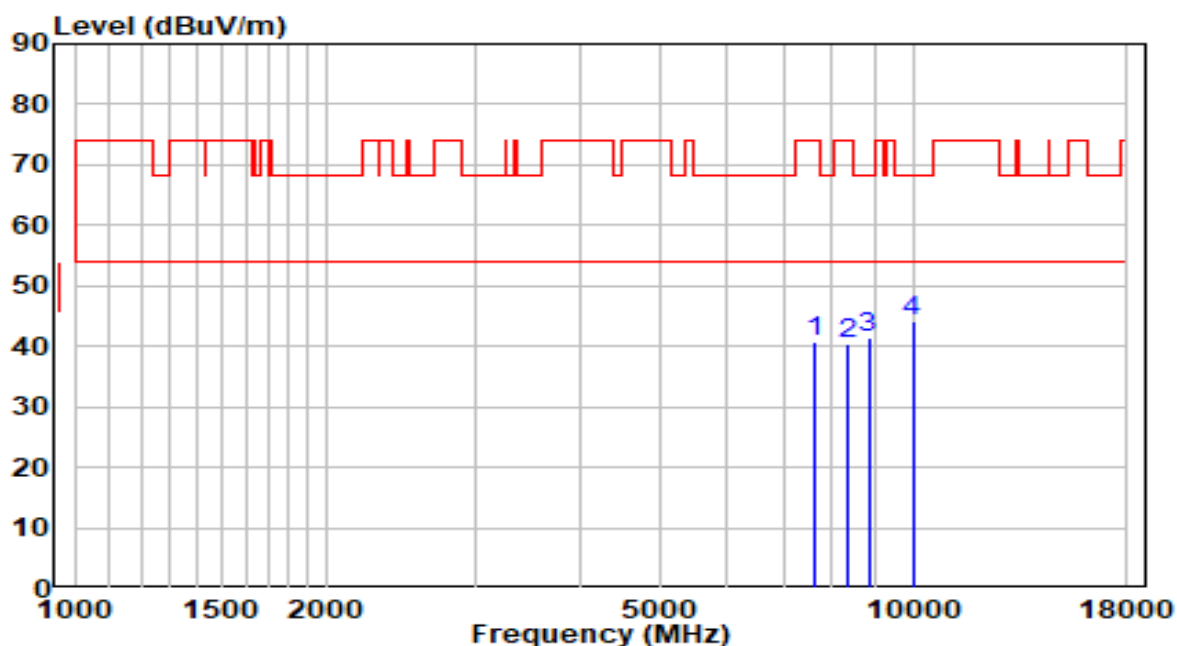


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	28.89	11.90	40.79	-33.21	74.00	Peak
2	8361.000	28.00	12.48	40.48	-33.52	74.00	Peak
3	8845.500	28.03	13.30	41.33	-26.87	68.20	Peak
4	* 9984.500	28.91	15.33	44.24	-23.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz - CDD Mode	Test Voltage	110V/60Hz

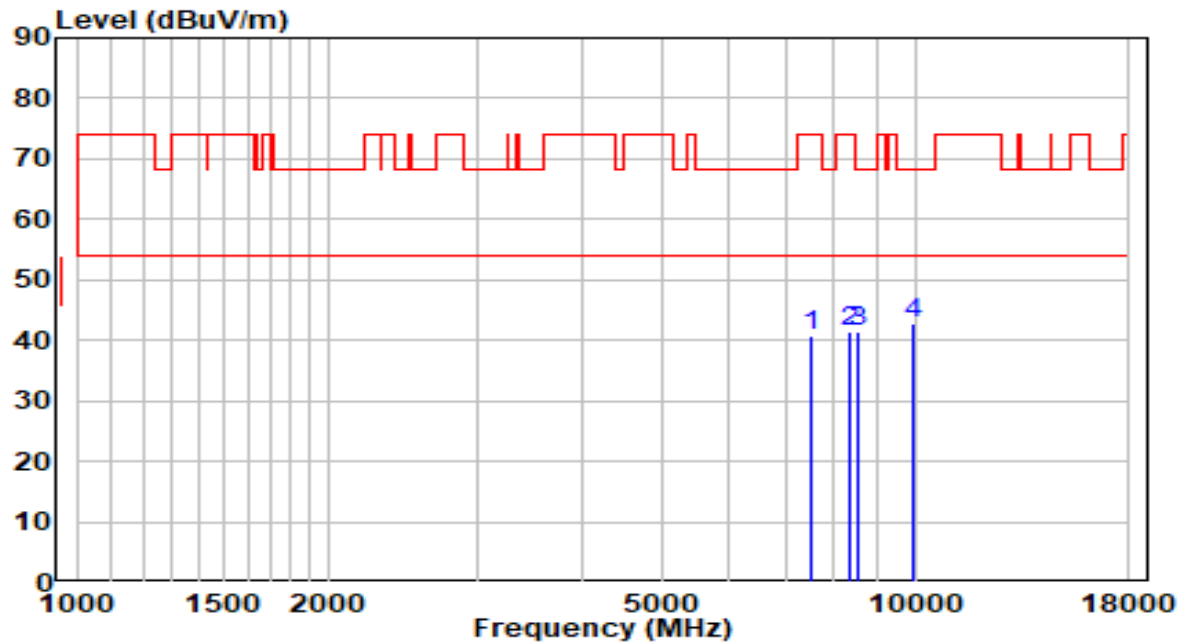


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	28.96	11.75	40.70	-33.30	74.00	Peak
2	8361.000	28.90	12.48	41.37	-32.63	74.00	Peak
3	8573.500	28.66	12.64	41.30	-26.90	68.20	Peak
4	* 9916.500	27.47	15.20	42.67	-25.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz - CDD Mode	Test Voltage	110V/60Hz

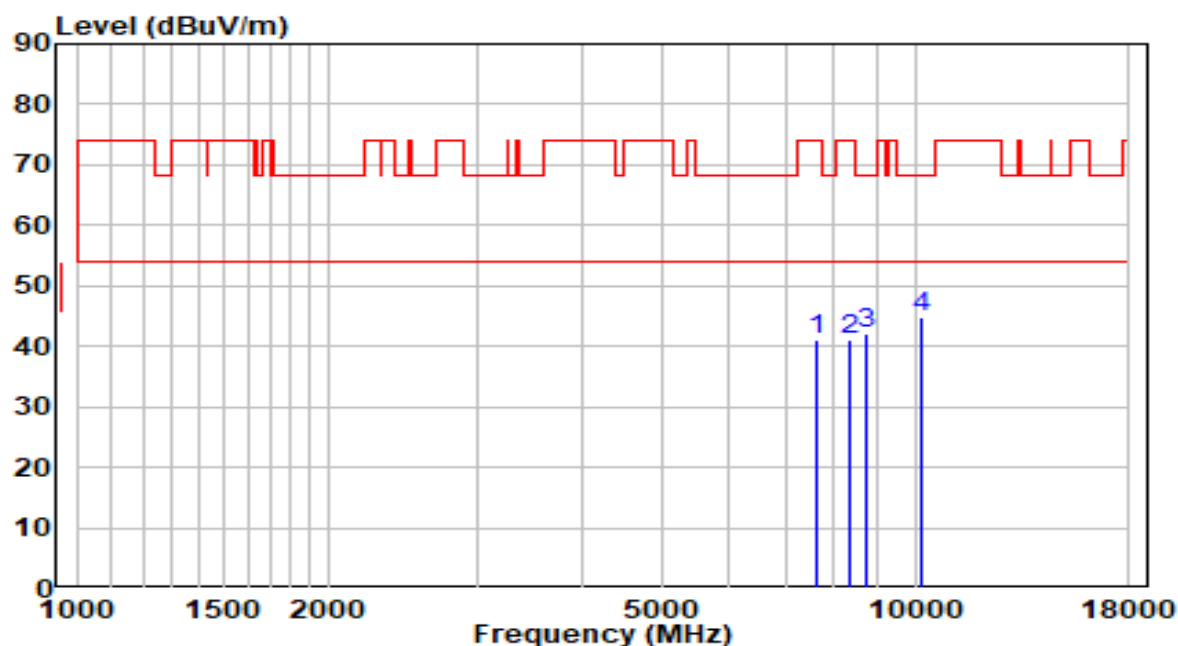


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	29.21	11.95	41.16	-32.84	74.00	Peak
2	8344.000	28.55	12.48	41.03	-32.97	74.00	Peak
3	8718.000	29.16	12.99	42.15	-26.05	68.20	Peak
4	* 10146.000	28.97	15.86	44.83	-23.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz - CDD Mode	Test Voltage	110V/60Hz

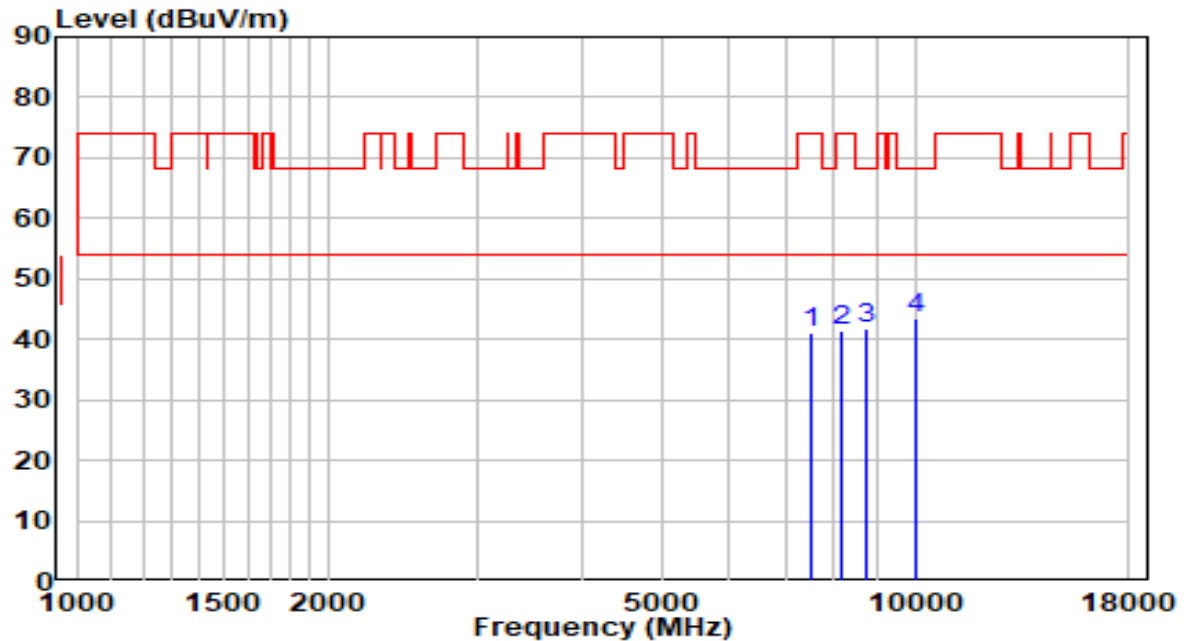


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	29.32	11.72	41.04	-32.96	74.00	Peak
2	8174.000	28.92	12.50	41.43	-32.57	74.00	Peak
3	8735.000	28.79	13.03	41.82	-26.38	68.20	Peak
4	* 10001.500	28.13	15.37	43.50	-24.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz - CDD Mode	Test Voltage	110V/60Hz

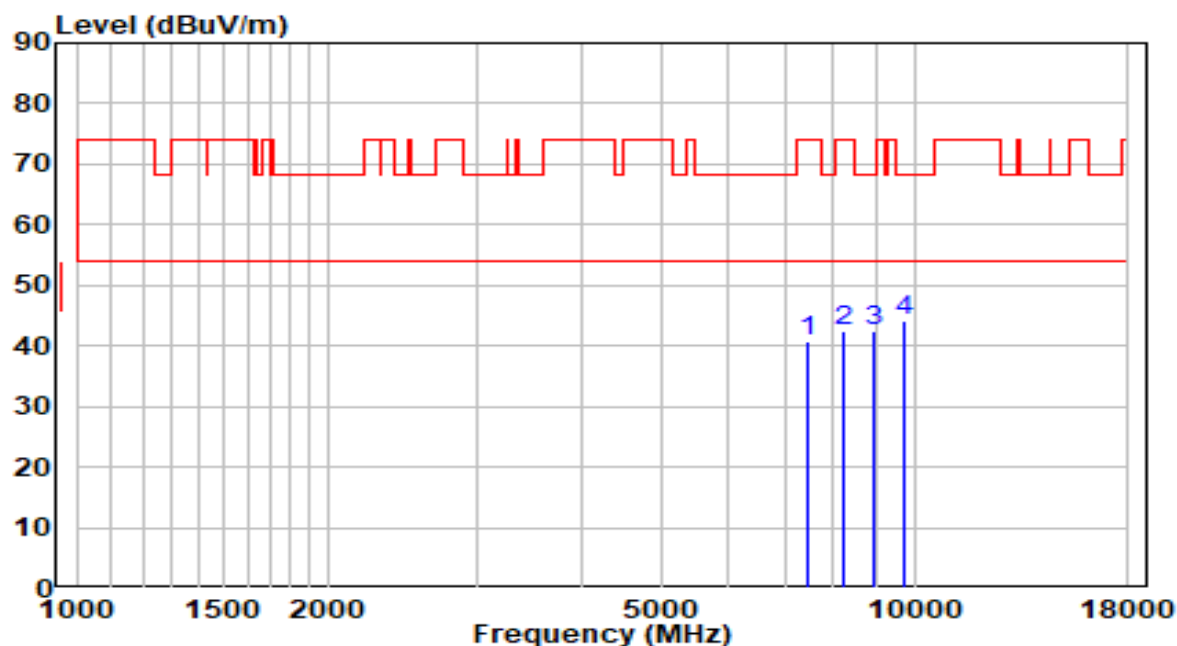


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7460.000	32.66	8.26	40.92	-33.08	74.00	Peak
2	8225.000	34.40	8.15	42.55	-31.45	74.00	Peak
3	8939.000	32.67	9.79	42.46	-25.74	68.20	Peak
4	* 9695.500	33.28	10.75	44.03	-24.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

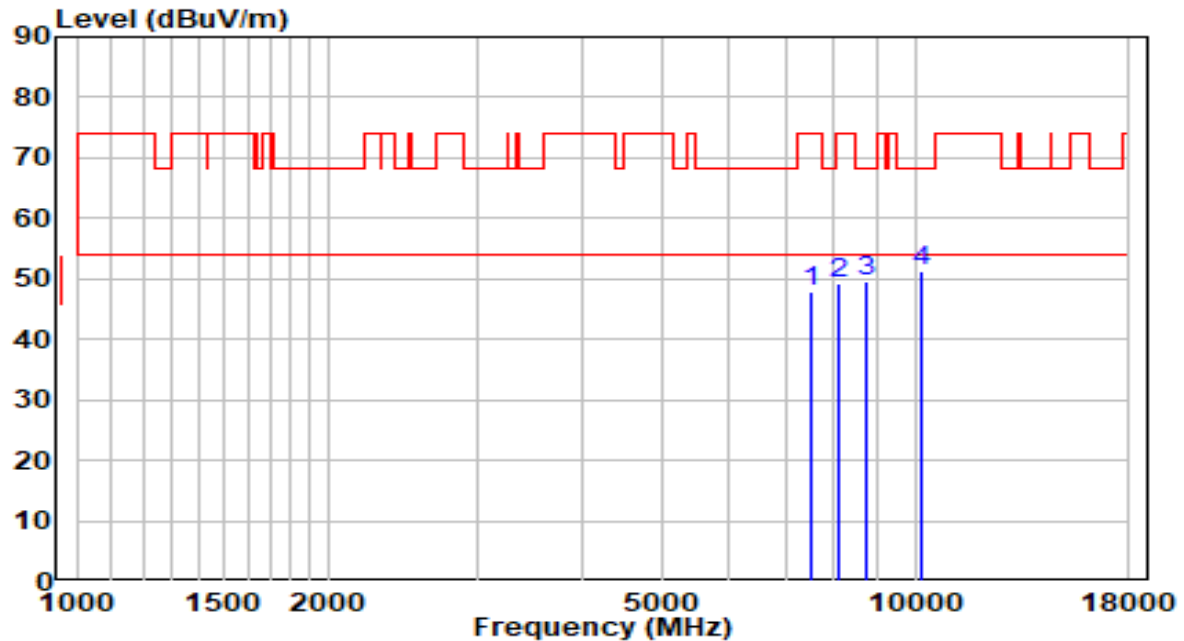


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7528.000	36.17	11.76	47.93	-26.07	74.00	Peak
2	8114.500	36.79	12.51	49.31	-24.69	74.00	Peak
3	8760.500	36.39	13.09	49.48	-18.72	68.20	Peak
4	* 10180.000	35.14	15.98	51.12	-17.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

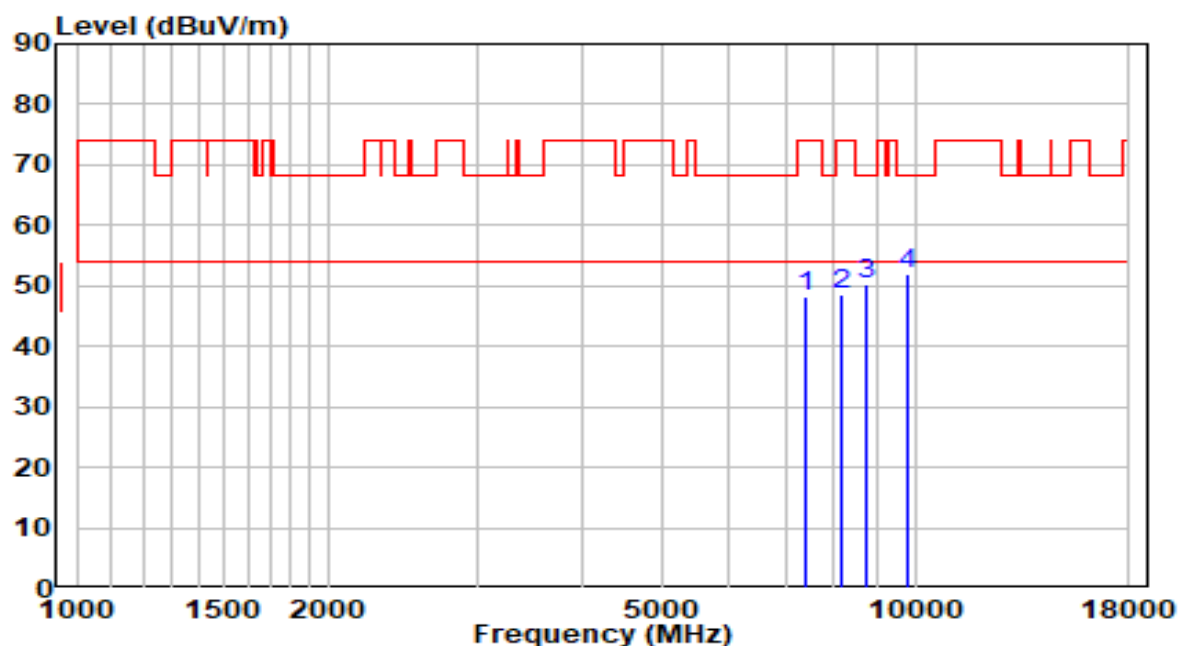


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7383.500	36.83	11.39	48.22	-25.78	74.00	Peak
2	8182.500	35.96	12.50	48.46	-25.54	74.00	Peak
3	8735.000	37.14	13.03	50.17	-18.03	68.20	Peak
4	* 9797.500	37.11	14.98	52.09	-16.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz - Beamforming Mode	Test Voltage	110V/60Hz

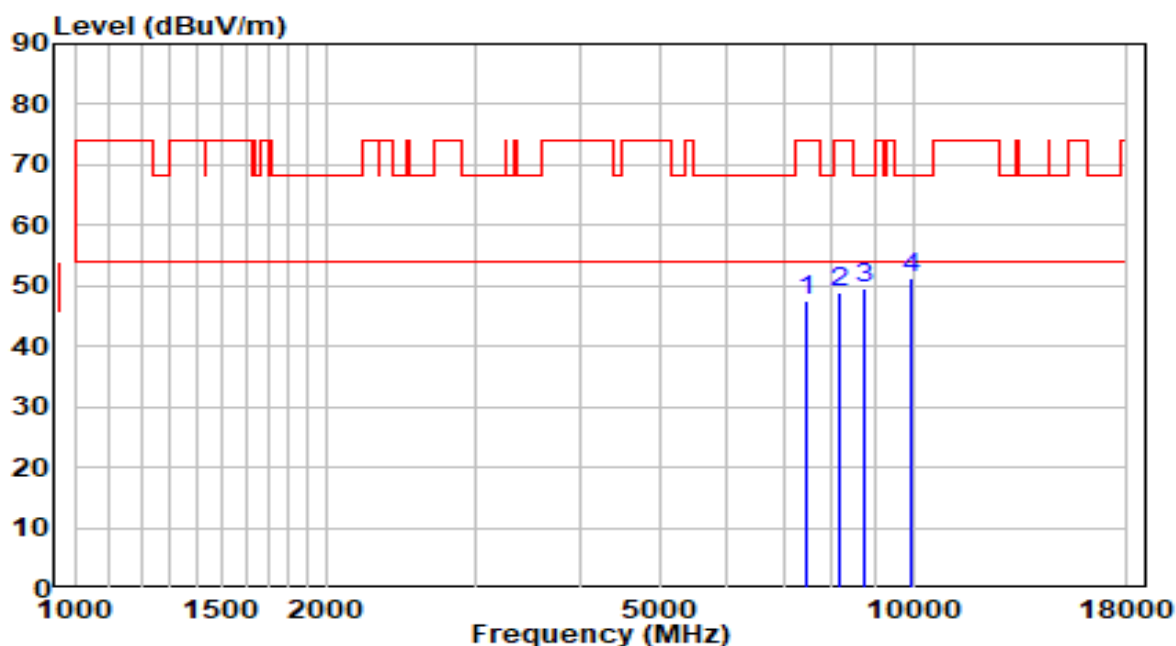


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7434.500	36.15	11.53	47.68	-26.32	74.00	Peak
2	8148.500	36.42	12.51	48.93	-25.07	74.00	Peak
3	8735.000	36.72	13.03	49.75	-18.45	68.20	Peak
4	* 9925.000	36.19	15.22	51.41	-16.79	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz - Beamforming Mode	Test Voltage	110V/60Hz

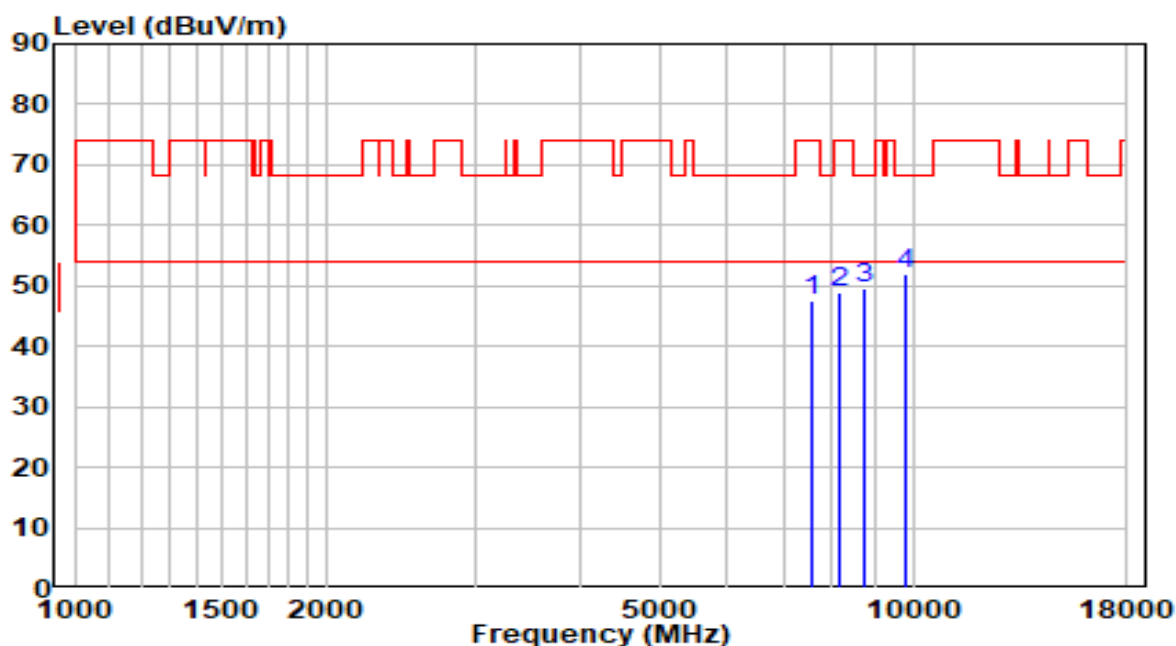


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	35.85	11.83	47.68	-26.32	74.00	Peak
2	8191.000	36.44	12.50	48.94	-25.06	74.00	Peak
3	8743.500	36.64	13.05	49.69	-18.51	68.20	Peak
4	* 9823.000	36.96	15.03	51.99	-16.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz - Beamforming Mode	Test Voltage	110V/60Hz

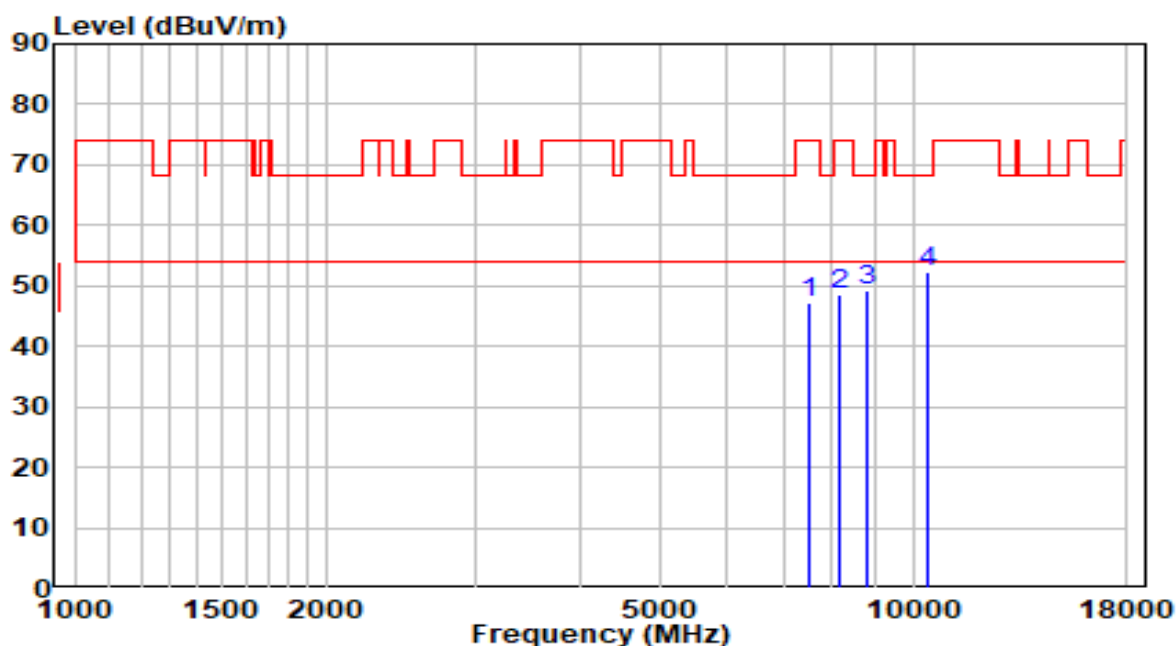


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	35.40	11.73	47.13	-26.87	74.00	Peak
2	8174.000	35.98	12.50	48.49	-25.51	74.00	Peak
3	8811.500	35.98	13.22	49.20	-19.00	68.20	Peak
4	* 10443.500	35.58	16.88	52.46	-15.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz - Beamforming Mode	Test Voltage	110V/60Hz

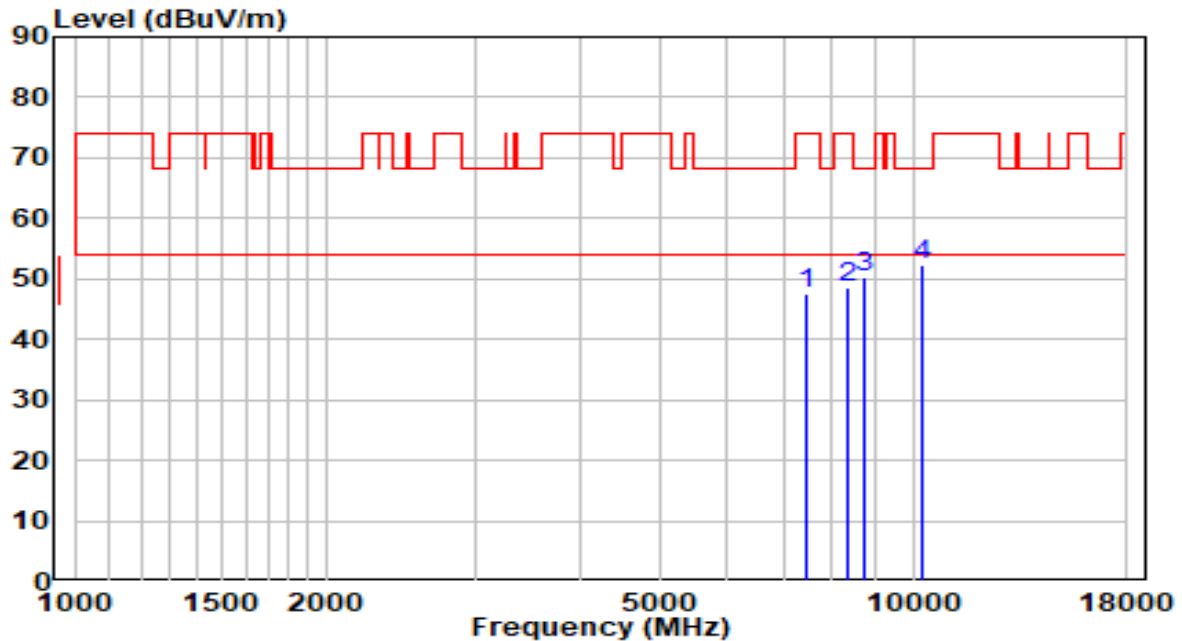


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	36.13	11.55	47.68	-26.32	74.00	Peak
2	8335.500	36.17	12.48	48.65	-25.35	74.00	Peak
3	8760.500	37.07	13.09	50.17	-18.03	68.20	Peak
4	* 10265.000	35.96	16.27	52.23	-15.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5260MHz - Beamforming Mode	Test Voltage	110V/60Hz

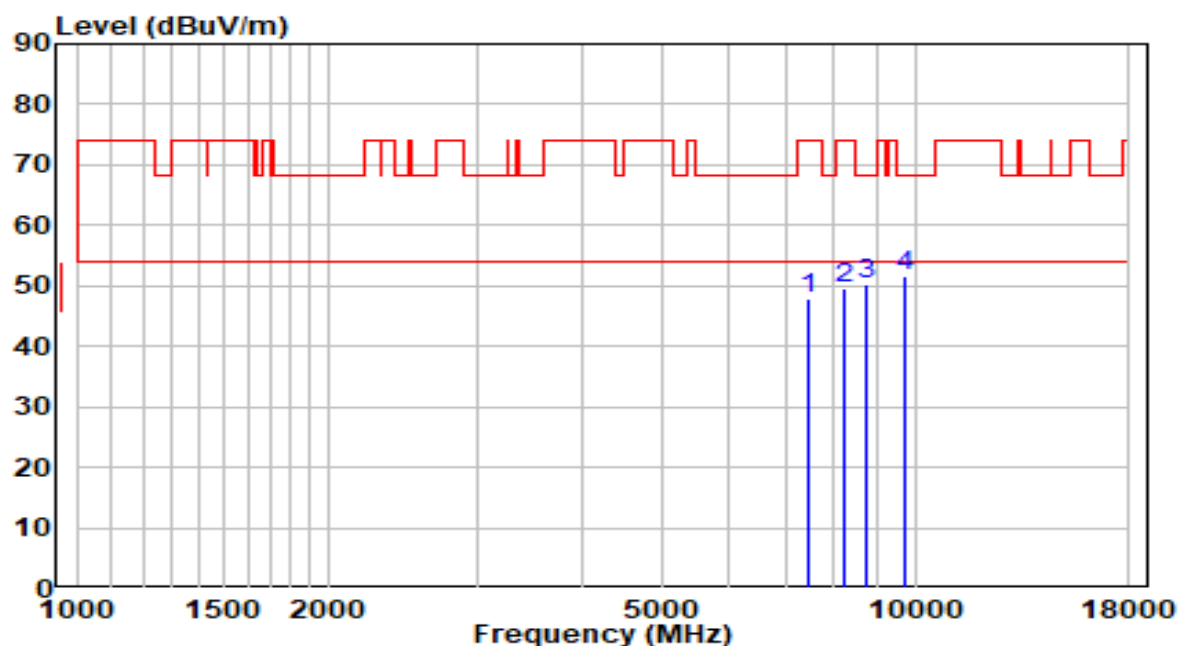


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7468.500	36.40	11.63	48.02	-25.98	74.00	Peak
2	8225.000	36.96	12.50	49.46	-24.54	74.00	Peak
3	8718.000	37.44	12.99	50.43	-17.77	68.20	Peak
4	* 9738.000	36.75	14.87	51.62	-16.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5260MHz - Beamforming Mode	Test Voltage	110V/60Hz

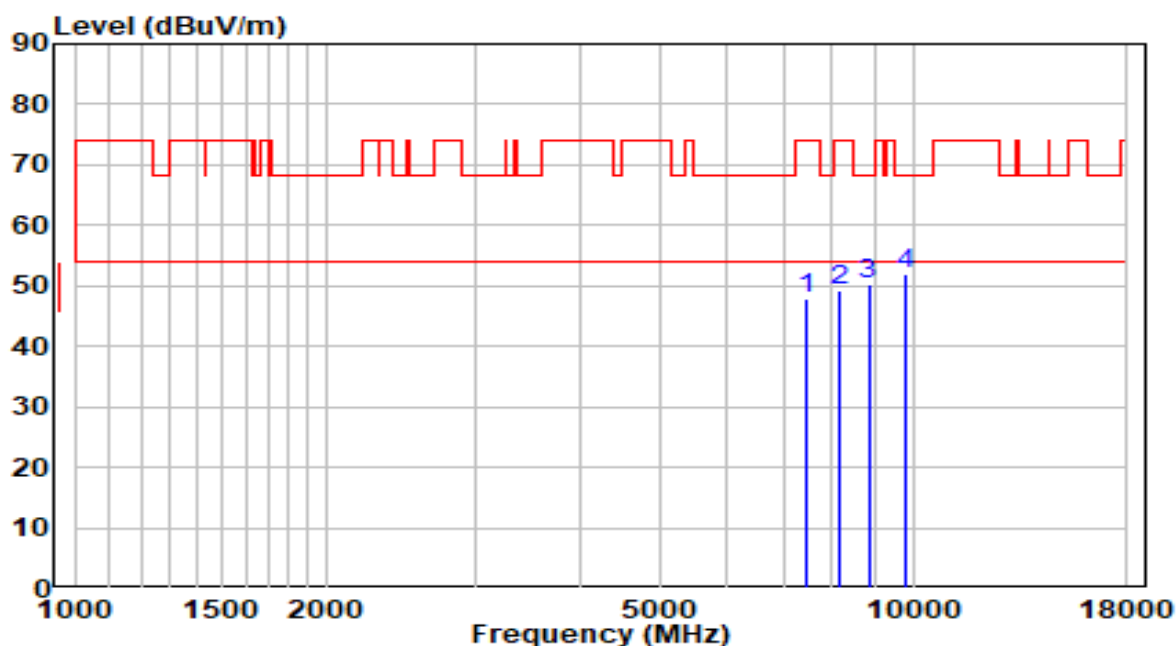


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	36.33	11.55	47.89	-26.11	74.00	Peak
2	8182.500	36.81	12.50	49.31	-24.69	74.00	Peak
3	8845.500	36.93	13.30	50.23	-17.97	68.20	Peak
4	* 9789.000	36.89	14.96	51.85	-16.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5300MHz - Beamforming Mode	Test Voltage	110V/60Hz

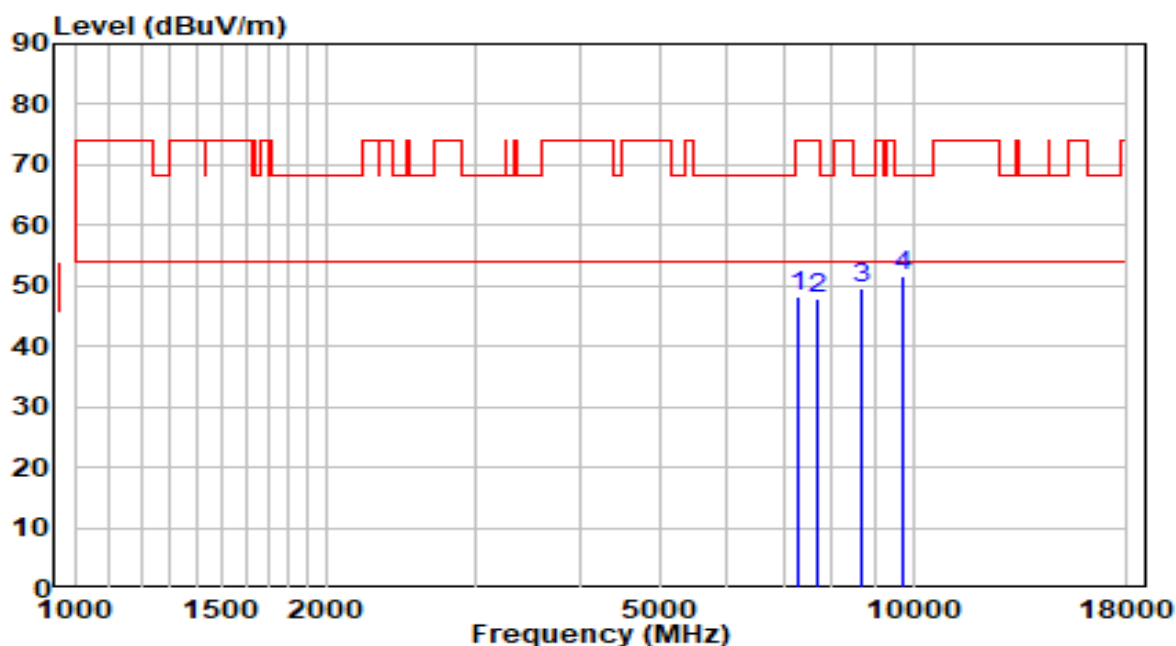


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7281.500	37.06	11.10	48.16	-25.84	74.00	Peak
2	7664.000	36.02	11.98	48.00	-26.00	74.00	Peak
3	8650.000	36.73	12.82	49.55	-18.65	68.20	Peak
4	* 9712.500	36.97	14.82	51.79	-16.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5300MHz - Beamforming Mode	Test Voltage	110V/60Hz

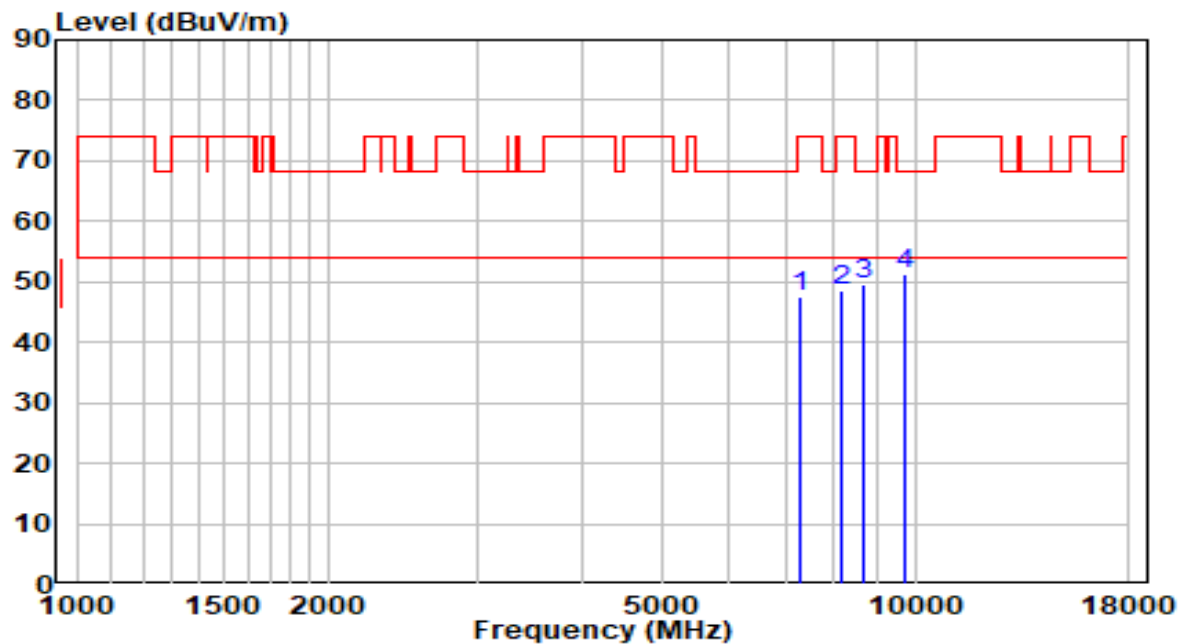


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7298.500	36.46	11.14	47.61	-26.39	74.00	Peak
2	8174.000	36.05	12.50	48.55	-25.45	74.00	Peak
3	8701.000	36.80	12.95	49.75	-18.45	68.20	Peak
4	* 9746.500	36.46	14.88	51.34	-16.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz - Beamforming Mode	Test Voltage	110V/60Hz

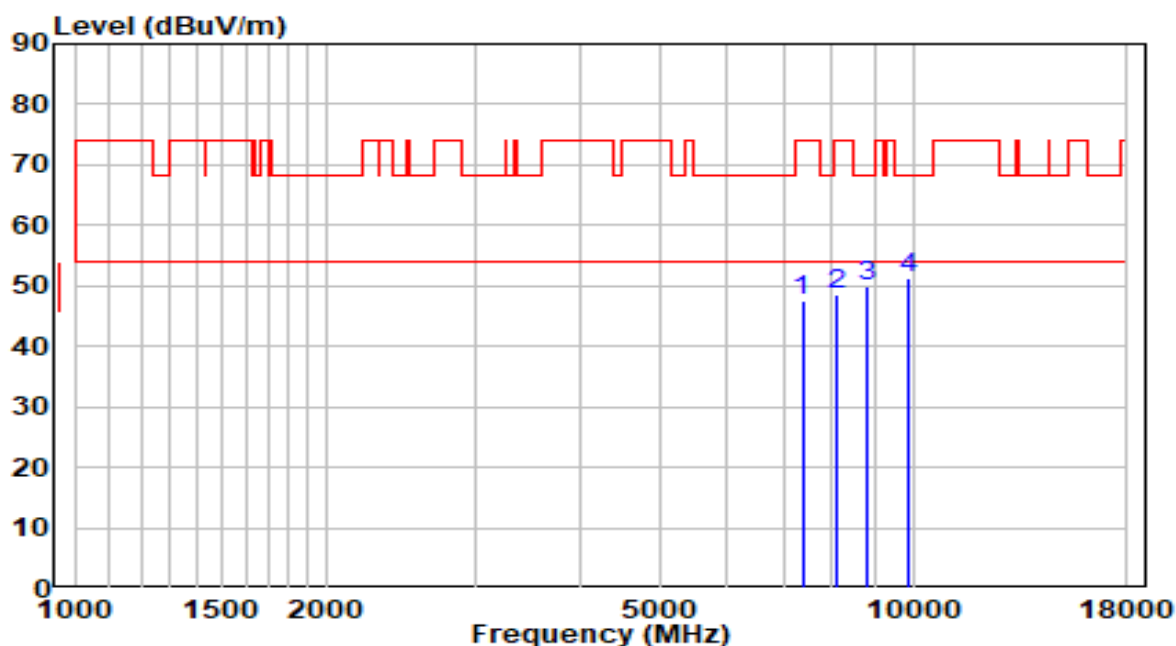


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7375.000	36.11	11.36	47.47	-26.53	74.00	Peak
2	8097.500	36.22	12.52	48.73	-25.27	74.00	Peak
3	8794.500	36.78	13.18	49.96	-18.24	68.20	Peak
4	* 9848.500	36.19	15.08	51.27	-16.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz - Beamforming Mode	Test Voltage	110V/60Hz

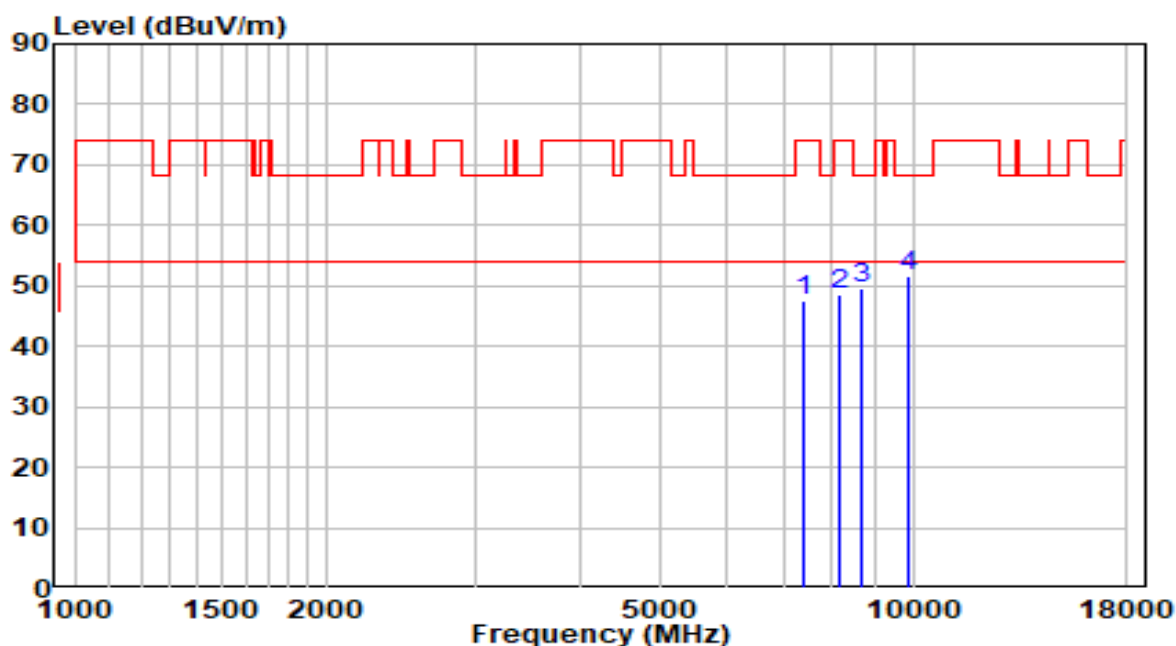


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7417.500	36.04	11.48	47.52	-26.48	74.00	Peak
2	8165.500	36.17	12.51	48.67	-25.33	74.00	Peak
3	8658.500	36.64	12.84	49.48	-18.72	68.20	Peak
4	* 9865.500	36.68	15.11	51.79	-16.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz - Beamforming Mode	Test Voltage	110V/60Hz

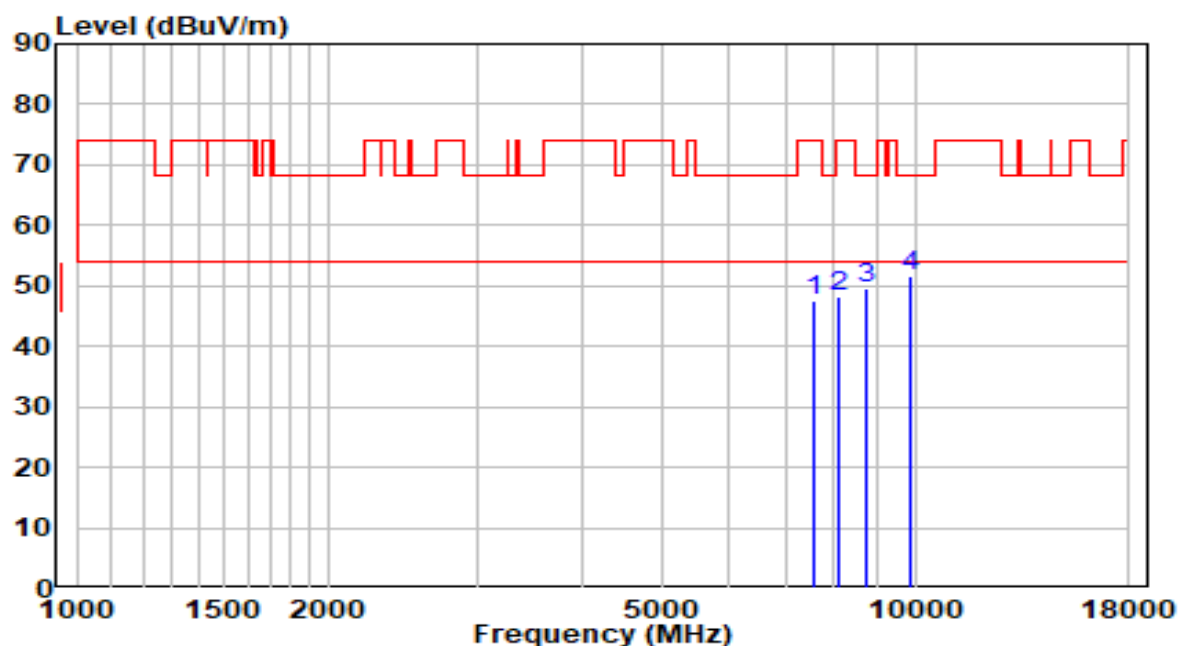


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	35.70	11.82	47.52	-26.48	74.00	Peak
2	8089.000	35.71	12.52	48.23	-25.77	74.00	Peak
3	8743.500	36.60	13.05	49.65	-18.55	68.20	Peak
4	* 9865.500	36.49	15.11	51.59	-16.61	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz - Beamforming Mode	Test Voltage	110V/60Hz

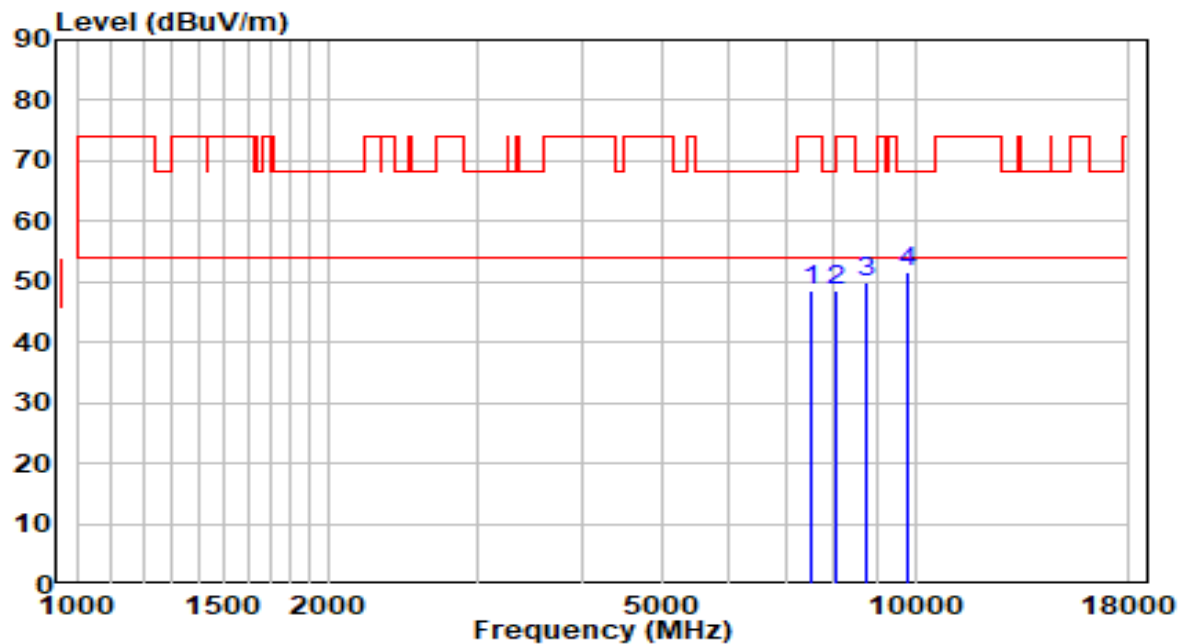


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7494.000	36.75	11.70	48.45	-25.55	74.00	Peak
2	8055.000	36.16	12.52	48.68	-25.32	74.00	Peak
3	8760.500	36.89	13.09	49.99	-18.21	68.20	Peak
4	* 9823.000	36.59	15.03	51.61	-16.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5580MHz - Beamforming Mode	Test Voltage	110V/60Hz

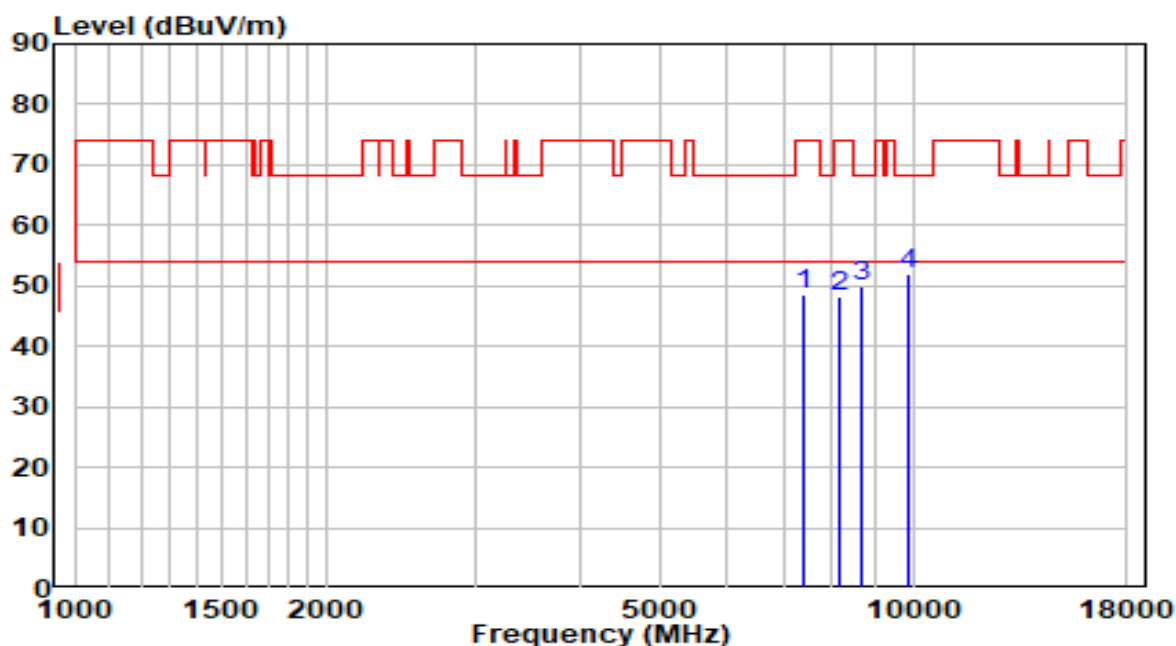


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7400.500	37.18	11.43	48.61	-25.39	74.00	Peak
2	8140.000	35.80	12.51	48.31	-25.69	74.00	Peak
3	8675.500	37.01	12.88	49.90	-18.30	68.20	Peak
4	* 9874.000	36.70	15.12	51.82	-16.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5580MHz - Beamforming Mode	Test Voltage	110V/60Hz

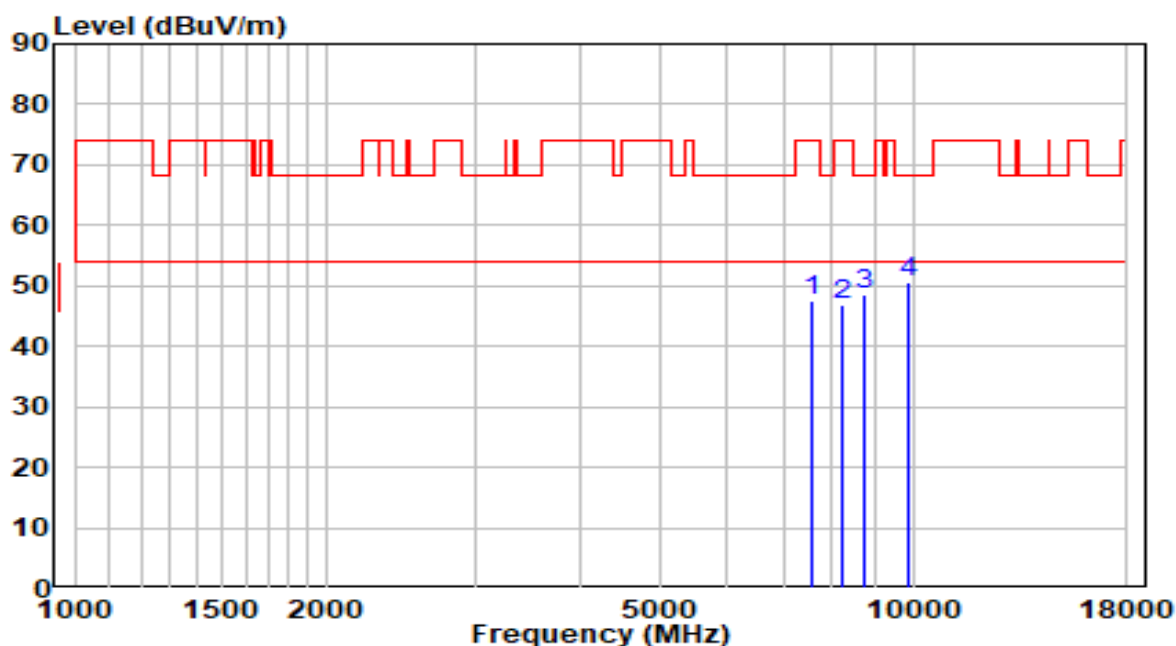


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	35.69	11.80	47.49	-26.51	74.00	Peak
2	8225.000	34.43	12.50	46.92	-27.08	74.00	Peak
3	8735.000	35.49	13.03	48.52	-19.68	68.20	Peak
4	* 9882.500	35.44	15.14	50.58	-17.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz - Beamforming Mode	Test Voltage	110V/60Hz

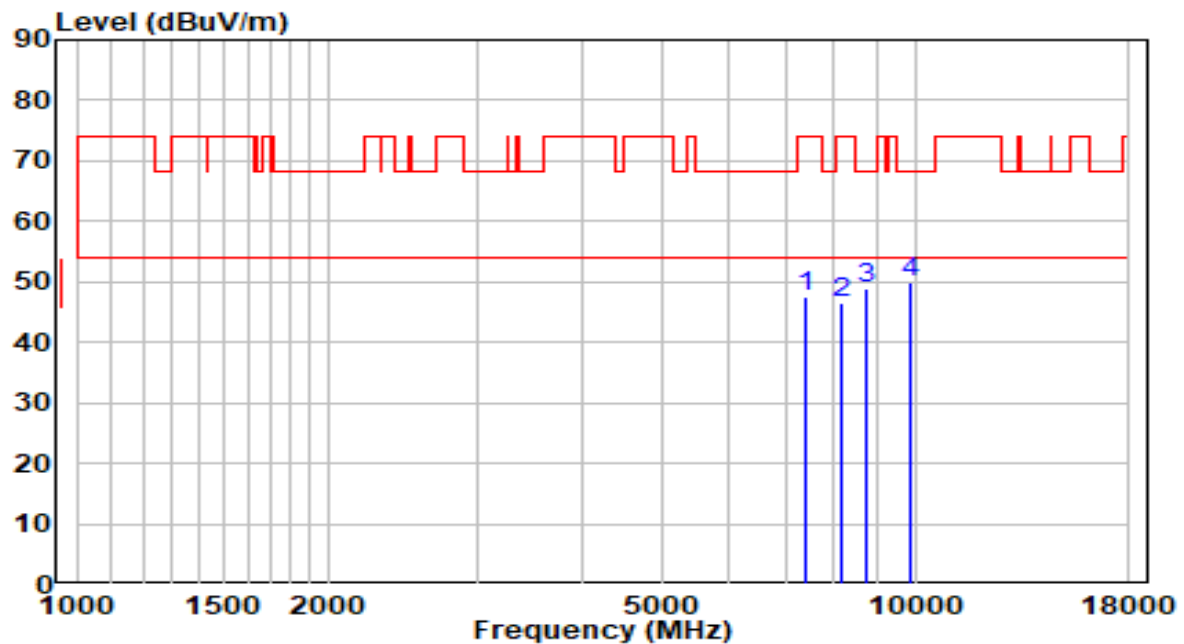


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7383.500	36.24	11.39	47.62	-26.38	74.00	Peak
2	8191.000	34.19	12.50	46.69	-27.31	74.00	Peak
3	8735.000	35.88	13.03	48.91	-19.29	68.20	Peak
4	* 9899.500	34.60	15.17	49.77	-18.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz - Beamforming Mode	Test Voltage	110V/60Hz

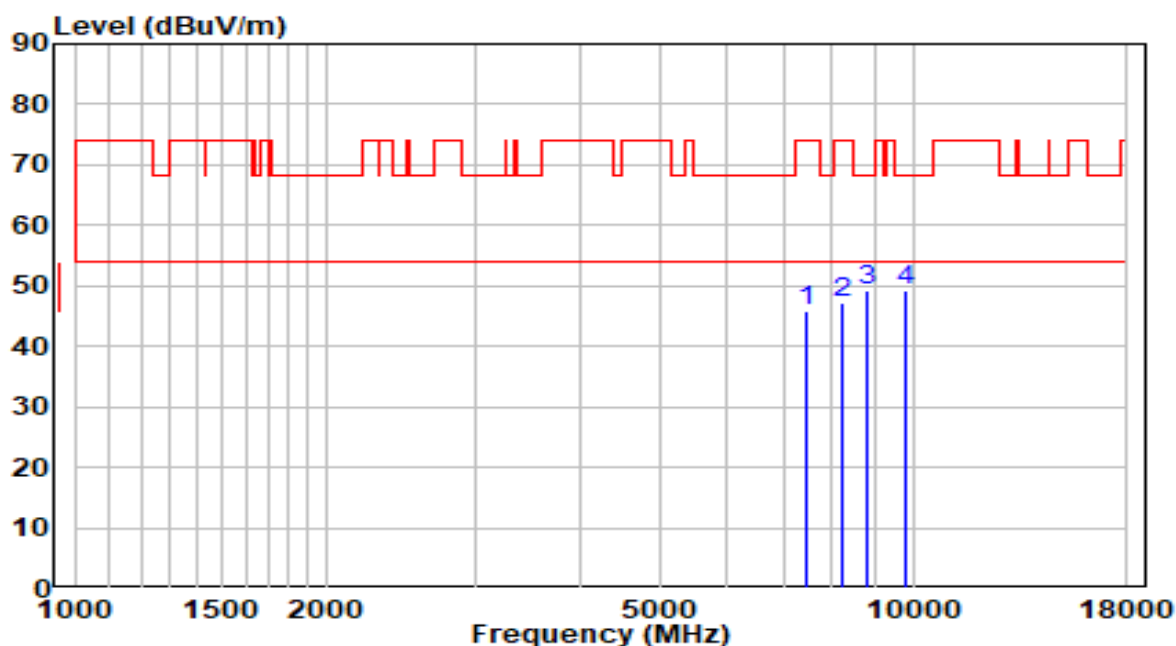


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	34.30	11.55	45.86	-28.14	74.00	Peak
2	8225.000	34.64	12.50	47.14	-26.86	74.00	Peak
3	8794.500	35.97	13.18	49.14	-19.06	68.20	Peak
4	* 9772.000	34.25	14.93	49.18	-19.02	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	tp-link-AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz - Beamforming Mode	Test Voltage	110V/60Hz

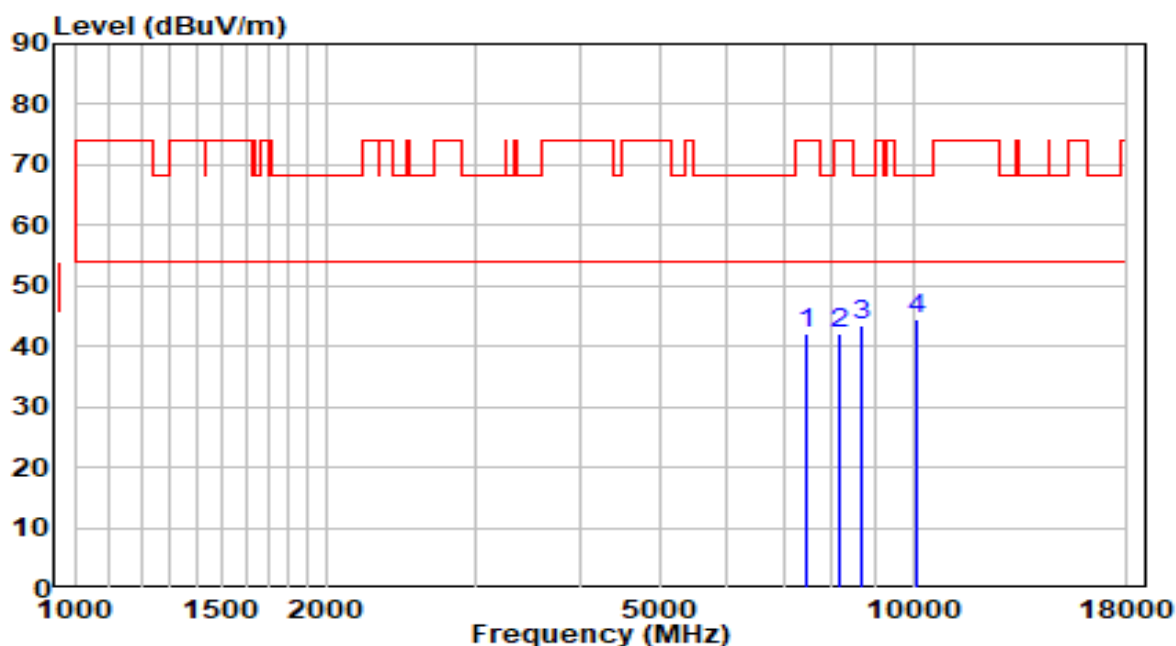


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	30.49	11.60	42.09	-31.91	74.00	Peak
2	8191.000	29.74	12.50	42.24	-31.76	74.00	Peak
3	8692.500	30.50	12.93	43.43	-24.77	68.20	Peak
4	* 10069.500	28.89	15.60	44.49	-23.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	tp-link-AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz - Beamforming Mode	Test Voltage	110V/60Hz

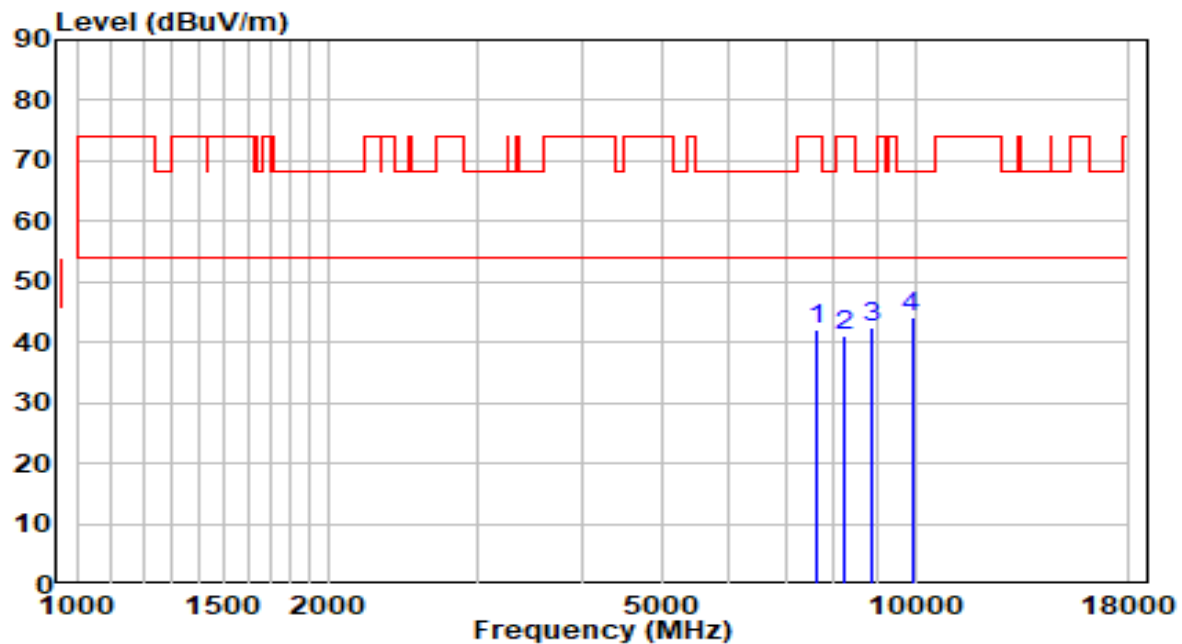


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	30.04	11.94	41.98	-32.02	74.00	Peak
2	8242.000	28.75	12.49	41.24	-32.76	74.00	Peak
3	8862.500	28.95	13.34	42.29	-25.91	68.20	Peak
4	* 9908.000	28.87	15.19	44.05	-24.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz - Beamforming Mode	Test Voltage	110V/60Hz

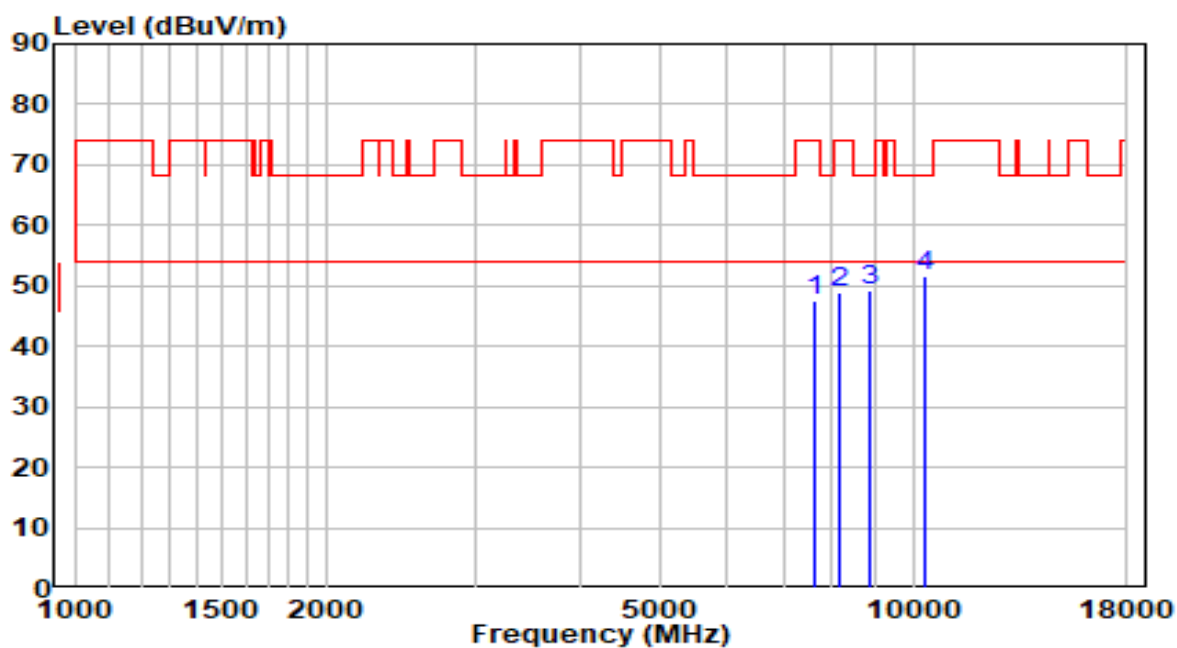


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	35.72	11.95	47.67	-26.33	74.00	Peak
2	8148.500	36.25	12.51	48.76	-25.24	74.00	Peak
3	8879.500	35.86	13.38	49.24	-18.96	68.20	Peak
4	* 10324.500	35.31	16.47	51.78	-16.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz - Beamforming Mode	Test Voltage	110V/60Hz

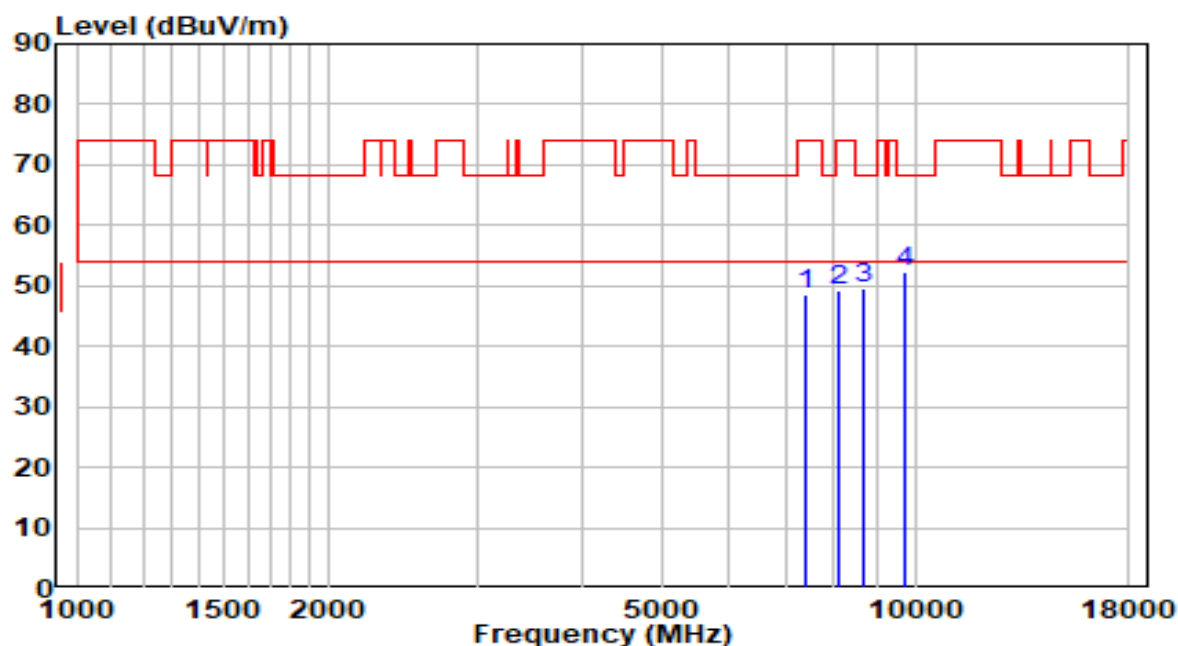


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7426.000	37.10	11.51	48.60	-25.40	74.00	Peak
2	8097.500	36.62	12.52	49.13	-24.87	74.00	Peak
3	8658.500	36.77	12.84	49.62	-18.58	68.20	Peak
4	* 9755.000	37.39	14.90	52.29	-15.91	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz - Beamforming Mode	Test Voltage	110V/60Hz

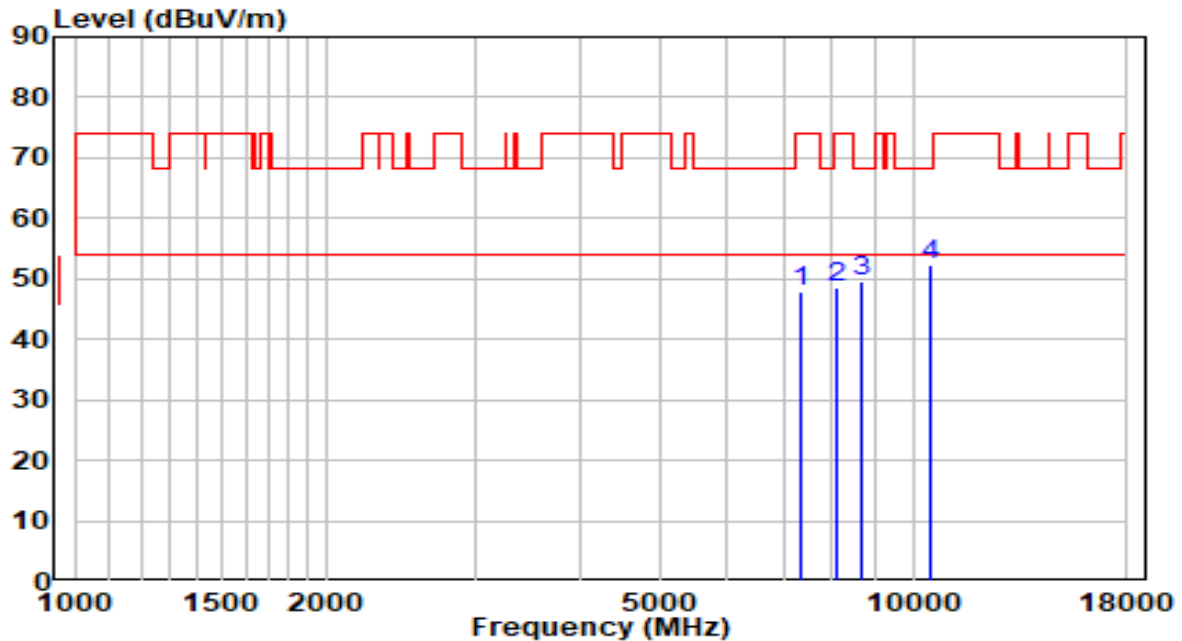


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7332.500	36.55	11.24	47.79	-26.21	74.00	Peak
2	8080.500	35.94	12.52	48.45	-25.55	74.00	Peak
3	8692.500	36.50	12.93	49.43	-18.77	68.20	Peak
4	* 10477.500	35.26	16.99	52.25	-15.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz - Beamforming Mode	Test Voltage	110V/60Hz

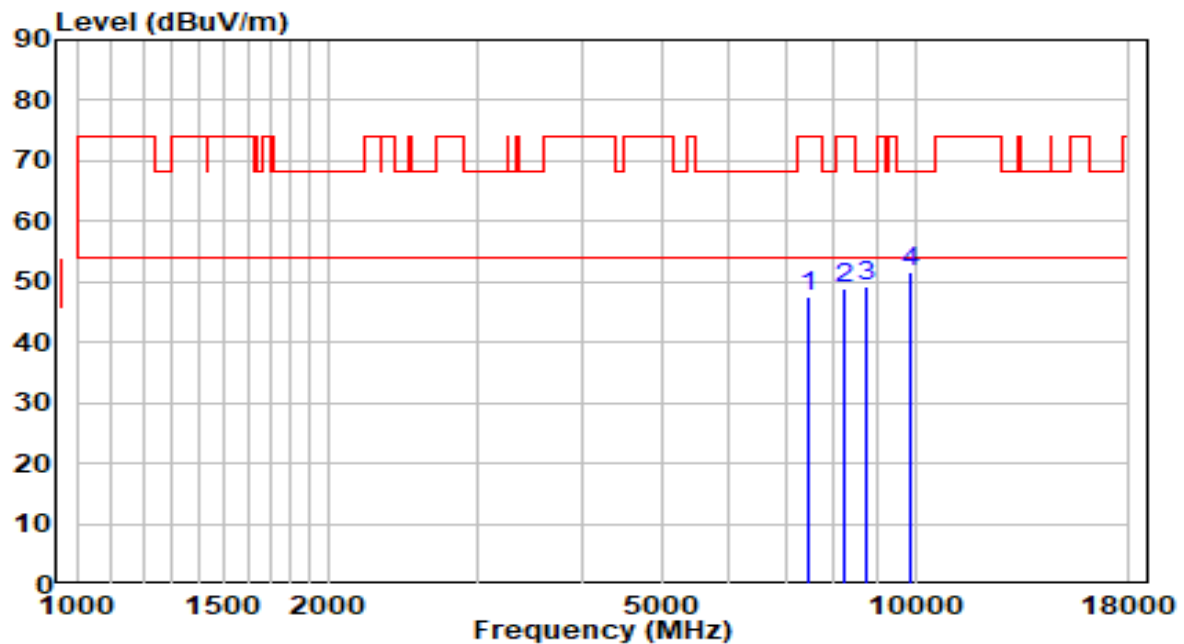


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7451.500	36.00	11.58	47.58	-26.42	74.00	Peak
2	8250.500	36.50	12.49	48.99	-25.01	74.00	Peak
3	8743.500	36.04	13.05	49.09	-19.11	68.20	Peak
4	* 9874.000	36.34	15.12	51.46	-16.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz - Beamforming Mode	Test Voltage	110V/60Hz

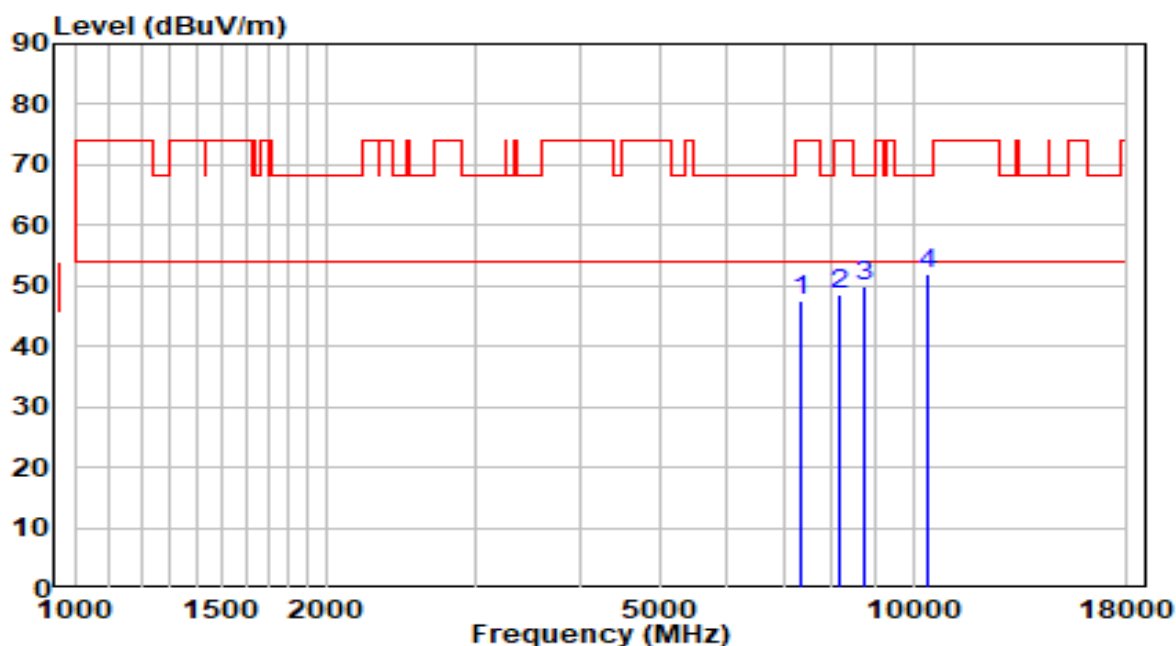


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7358.000	36.31	11.31	47.63	-26.37	74.00	Peak
2	8157.000	36.08	12.51	48.59	-25.41	74.00	Peak
3	8718.000	36.95	12.99	49.94	-18.26	68.20	Peak
4	* 10384.000	35.24	16.67	51.92	-16.28	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz - Beamforming Mode	Test Voltage	110V/60Hz

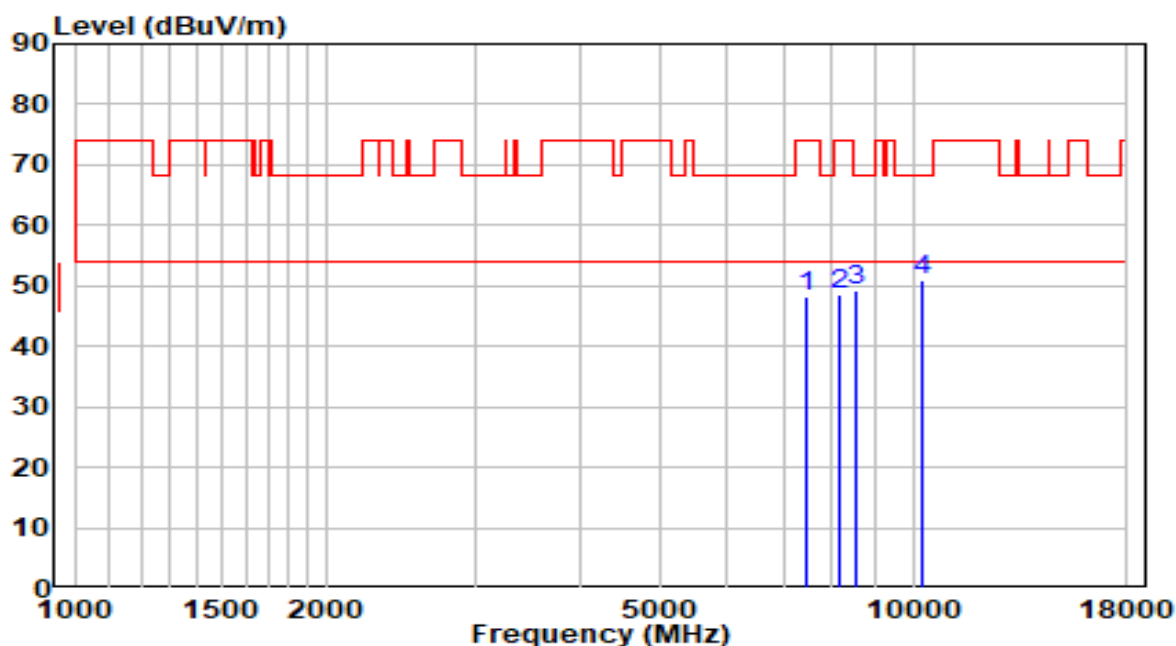


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	36.66	11.65	48.31	-25.69	74.00	Peak
2	8148.500	35.95	12.51	48.46	-25.54	74.00	Peak
3	8573.500	36.57	12.64	49.20	-19.00	68.20	Peak
4	* 10248.000	34.88	16.21	51.08	-17.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

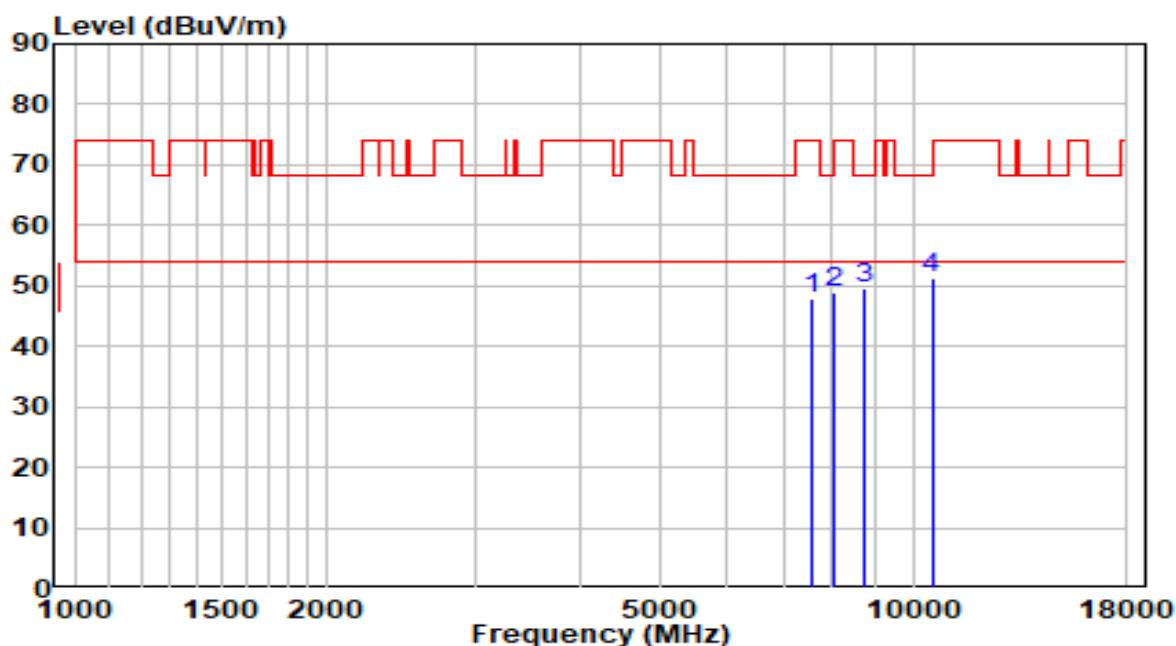


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	35.91	11.83	47.74	-26.26	74.00	Peak
2	8055.000	36.22	12.52	48.74	-25.26	74.00	Peak
3	8743.500	36.69	13.05	49.74	-18.46	68.20	Peak
4	* 10528.500	34.03	17.11	51.14	-17.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

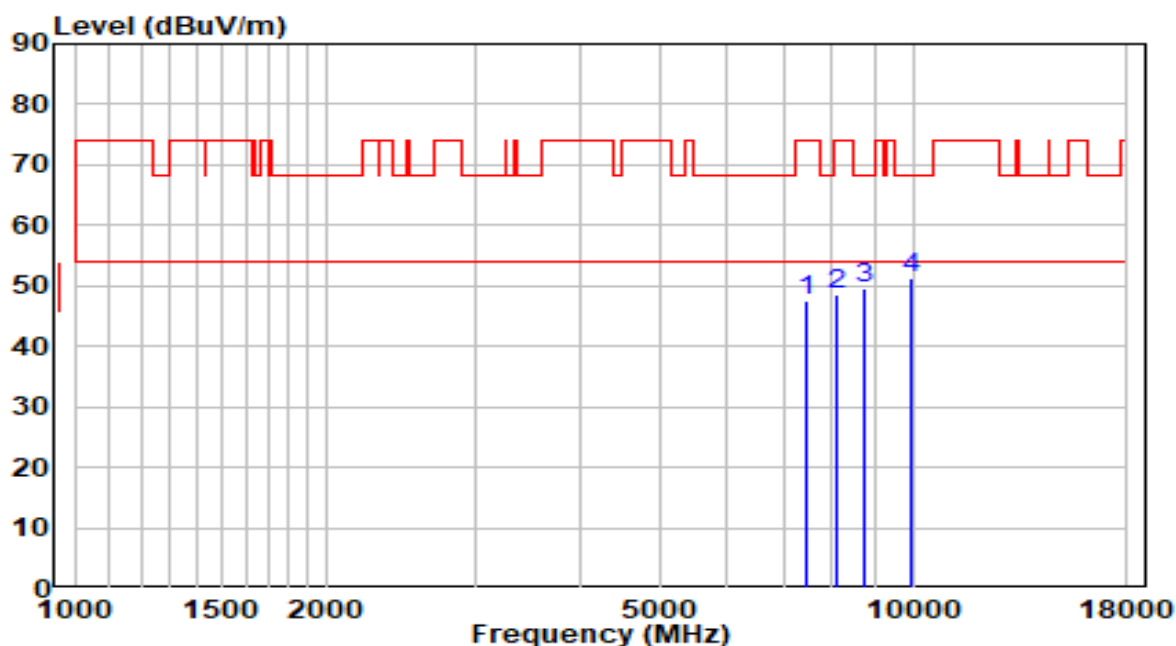


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7468.500	35.93	11.63	47.55	-26.45	74.00	Peak
2	8106.000	35.96	12.51	48.47	-25.53	74.00	Peak
3	8752.000	36.56	13.07	49.64	-18.56	68.20	Peak
4	* 9925.000	36.08	15.22	51.30	-16.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz - Beamforming Mode	Test Voltage	110V/60Hz

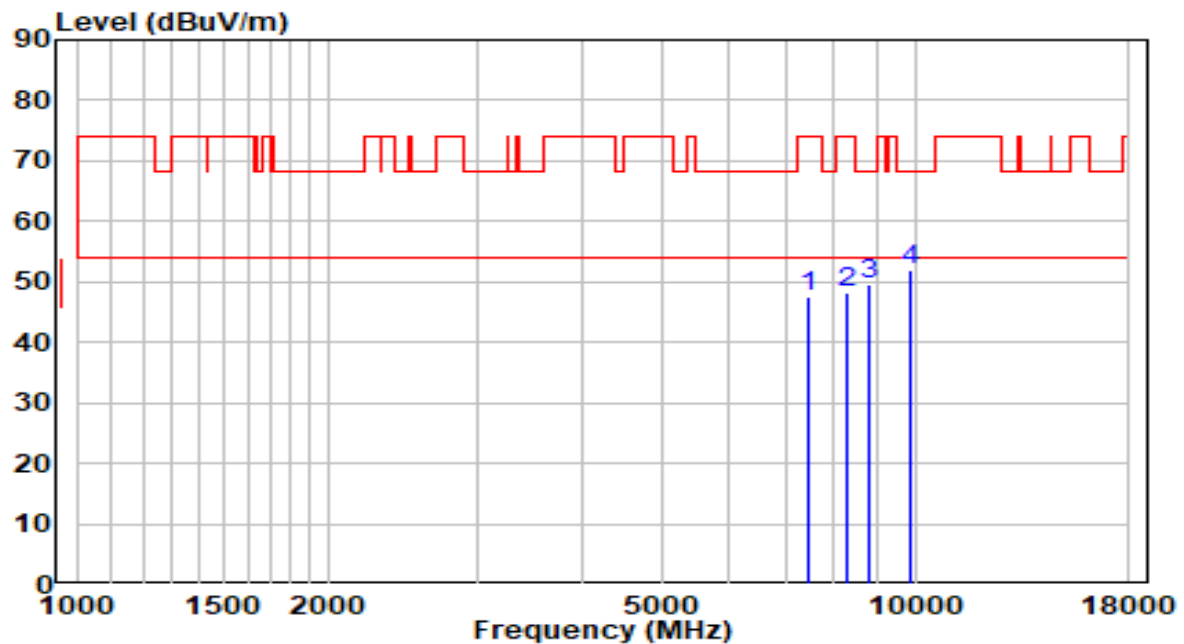


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	35.86	11.67	47.53	-26.47	74.00	Peak
2	8267.500	35.76	12.49	48.25	-25.75	74.00	Peak
3	8828.500	36.38	13.26	49.64	-18.56	68.20	Peak
4	* 9899.500	36.94	15.17	52.11	-16.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz - Beamforming Mode	Test Voltage	110V/60Hz

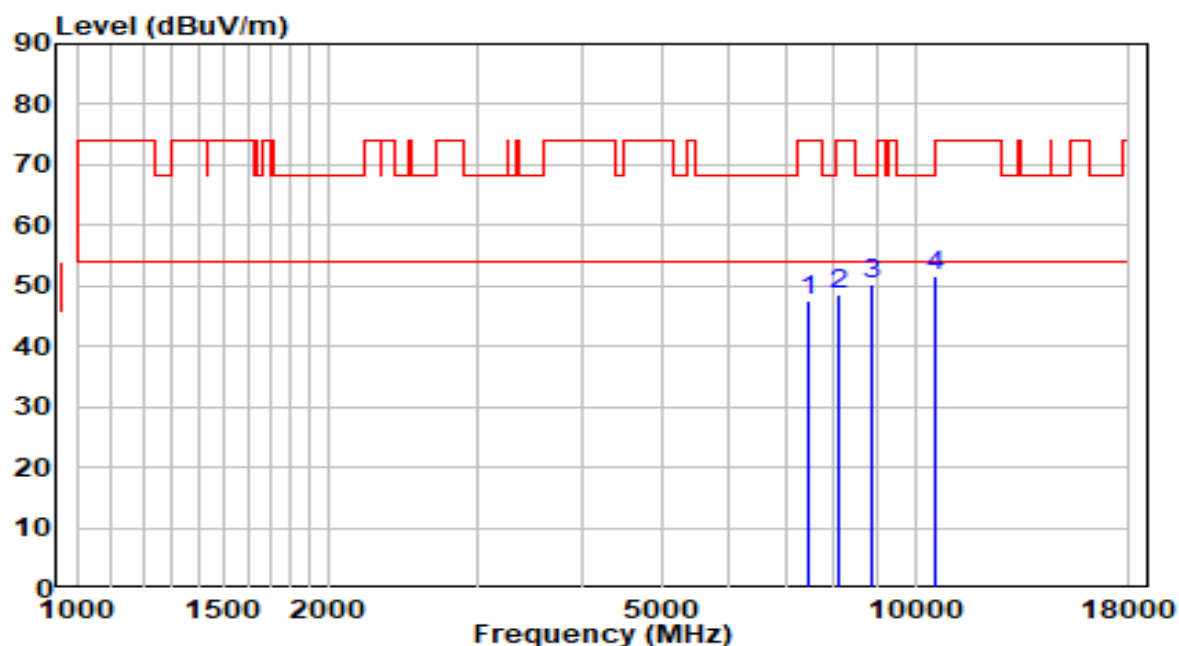


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	35.91	11.60	47.51	-26.49	74.00	Peak
2	8080.500	36.09	12.52	48.61	-25.39	74.00	Peak
3	8862.500	36.77	13.34	50.11	-18.09	68.20	Peak
4	* 10537.000	34.63	17.12	51.75	-16.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz - Beamforming Mode	Test Voltage	110V/60Hz

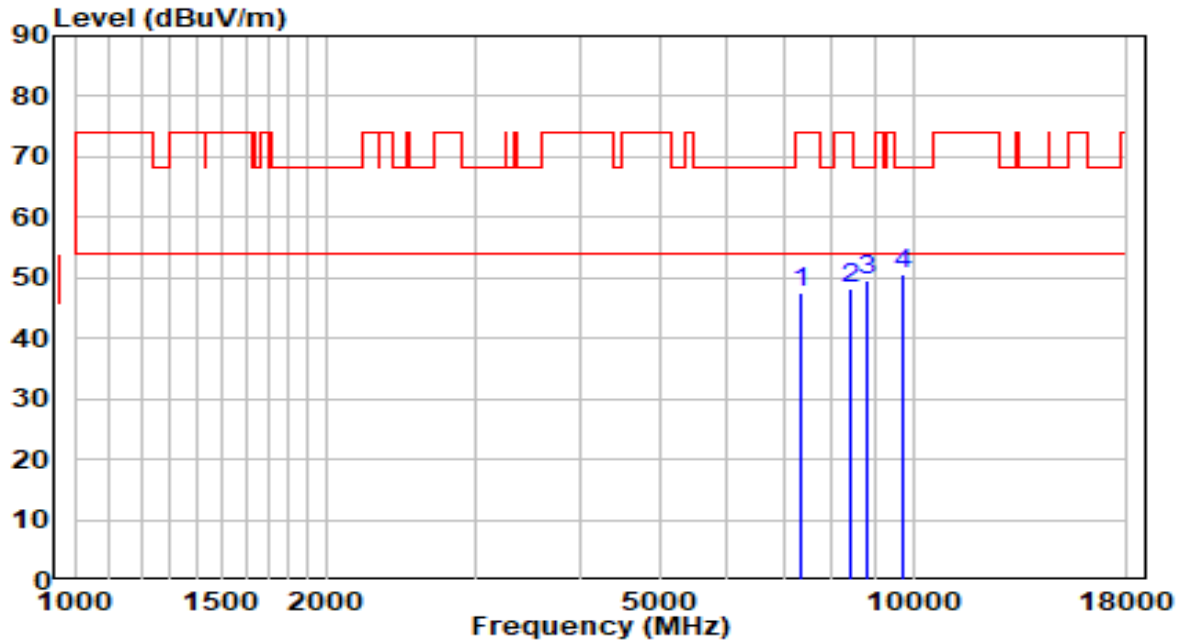


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7358.000	36.15	11.31	47.46	-26.54	74.00	Peak
2	8403.500	35.82	12.47	48.29	-25.71	74.00	Peak
3	8820.000	36.50	13.24	49.74	-18.46	68.20	Peak
4	* 9755.000	35.55	14.90	50.45	-17.75	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz - Beamforming Mode	Test Voltage	110V/60Hz

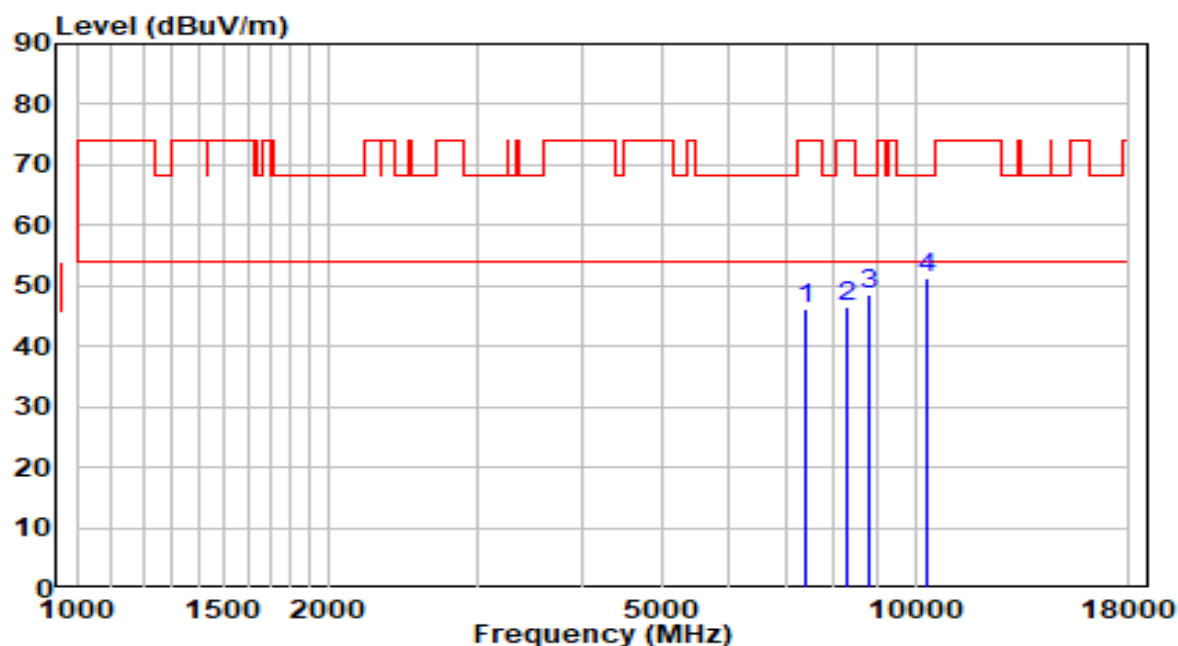


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7400.500	34.59	11.43	46.02	-27.98	74.00	Peak
2	8310.000	33.88	12.48	46.36	-27.64	74.00	Peak
3	8811.500	35.46	13.22	48.68	-19.52	68.20	Peak
4	* 10299.000	34.80	16.38	51.19	-17.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz - Beamforming Mode	Test Voltage	110V/60Hz

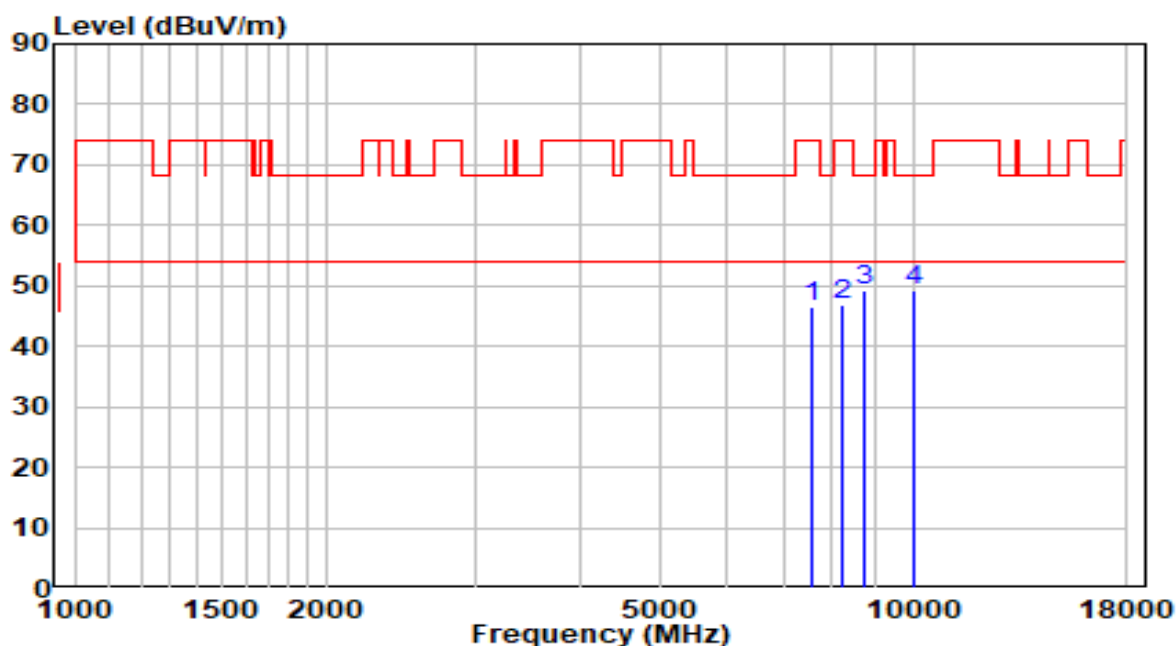


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	34.78	11.83	46.61	-27.39	74.00	Peak
2	8259.000	34.39	12.49	46.88	-27.12	74.00	Peak
3	8735.000	36.15	13.03	49.18	-19.02	68.20	Peak
4	* 10027.000	33.81	15.45	49.27	-18.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz - Beamforming Mode	Test Voltage	110V/60Hz

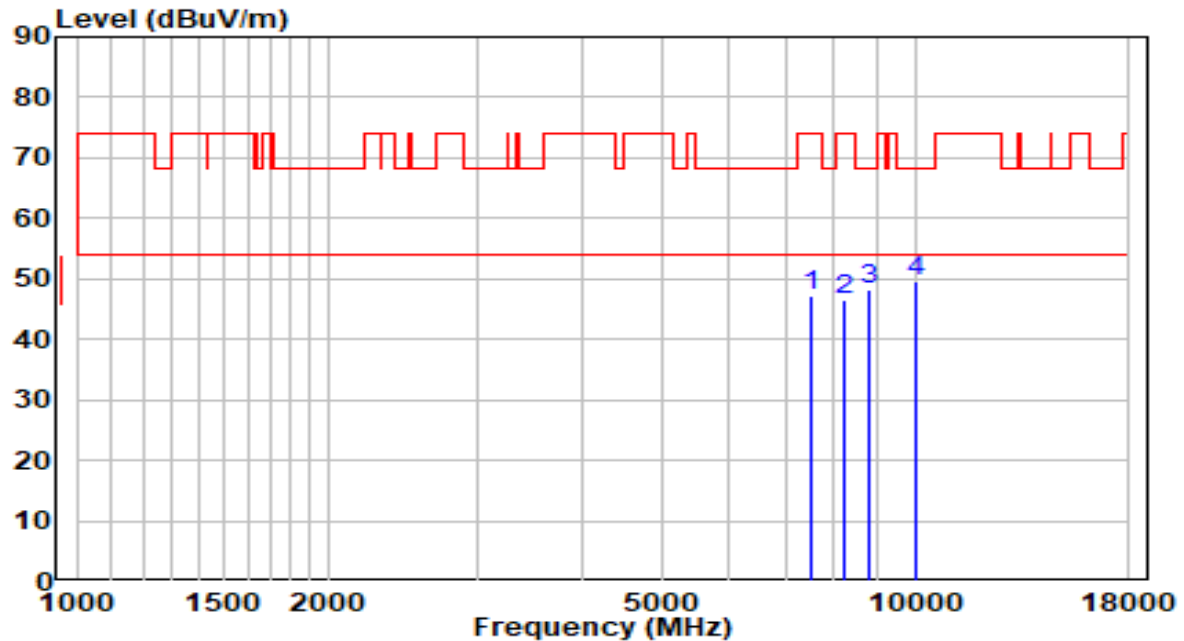


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	35.58	11.75	47.33	-26.67	74.00	Peak
2	8259.000	33.95	12.49	46.44	-27.56	74.00	Peak
3	8794.500	35.07	13.18	48.25	-19.95	68.20	Peak
4	* 10027.000	34.06	15.45	49.51	-18.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz - Beamforming Mode	Test Voltage	110V/60Hz

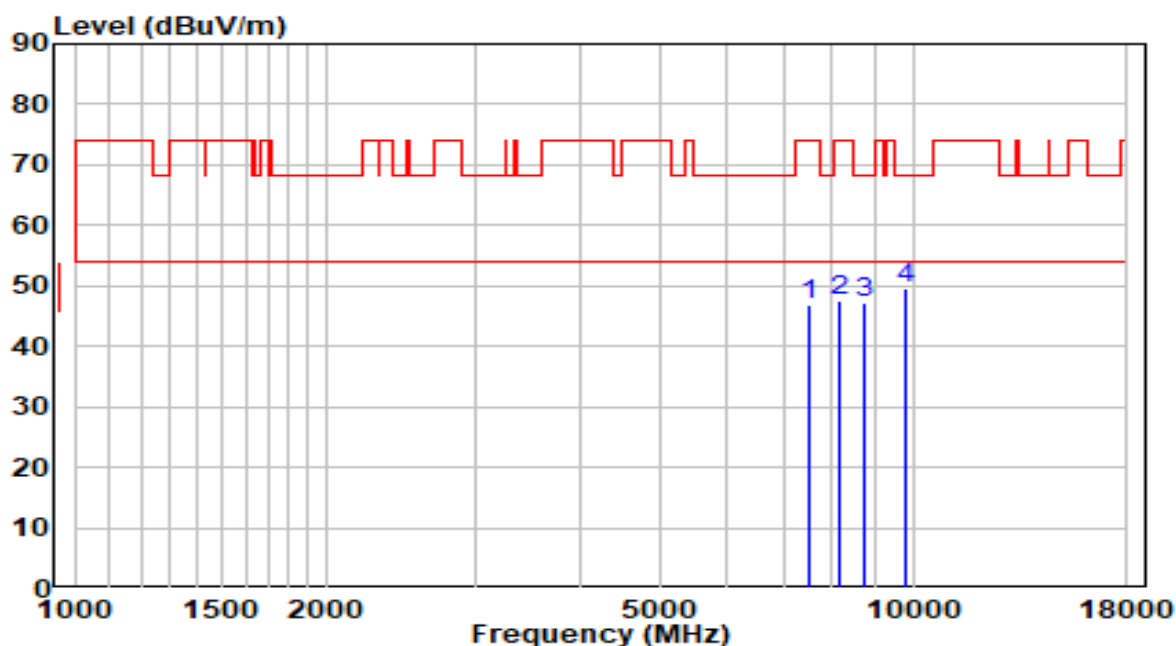


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	35.02	11.77	46.79	-27.21	74.00	Peak
2	8174.000	35.00	12.50	47.50	-26.50	74.00	Peak
3	8718.000	34.35	12.99	47.34	-20.86	68.20	Peak
4	* 9814.500	34.63	15.01	49.64	-18.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz - Beamforming Mode	Test Voltage	110V/60Hz

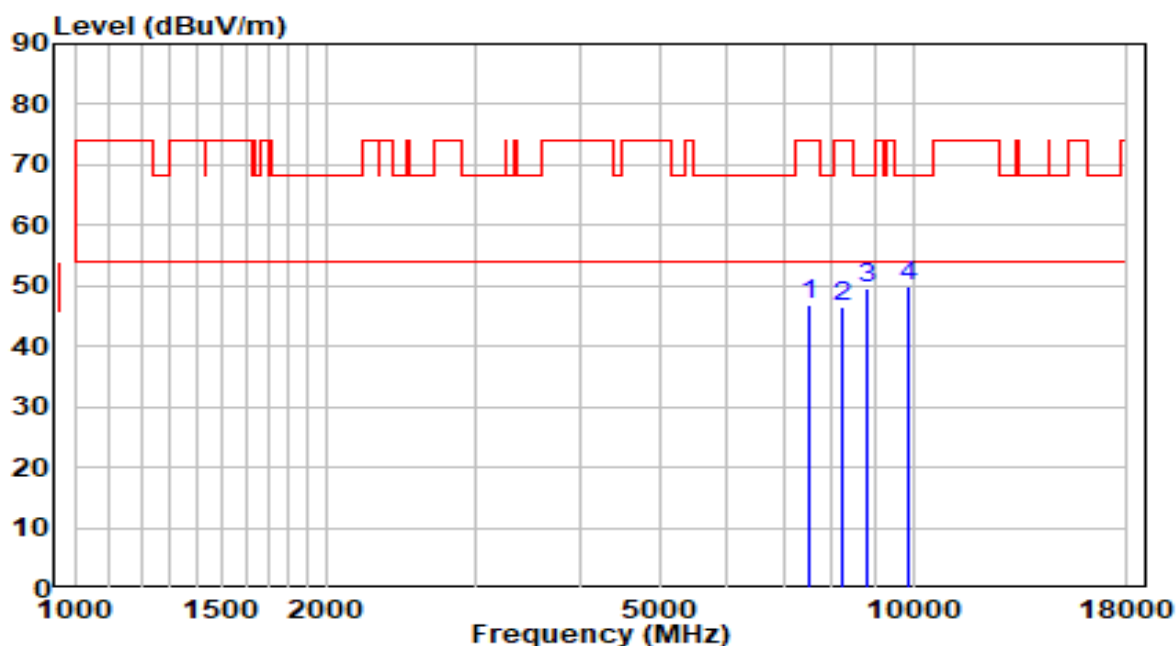


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	35.19	11.75	46.94	-27.06	74.00	Peak
2	8242.000	34.14	12.49	46.63	-27.37	74.00	Peak
3	8811.500	36.45	13.22	49.67	-18.53	68.20	Peak
4	* 9840.000	34.99	15.06	50.05	-18.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz - Beamforming Mode	Test Voltage	110V/60Hz

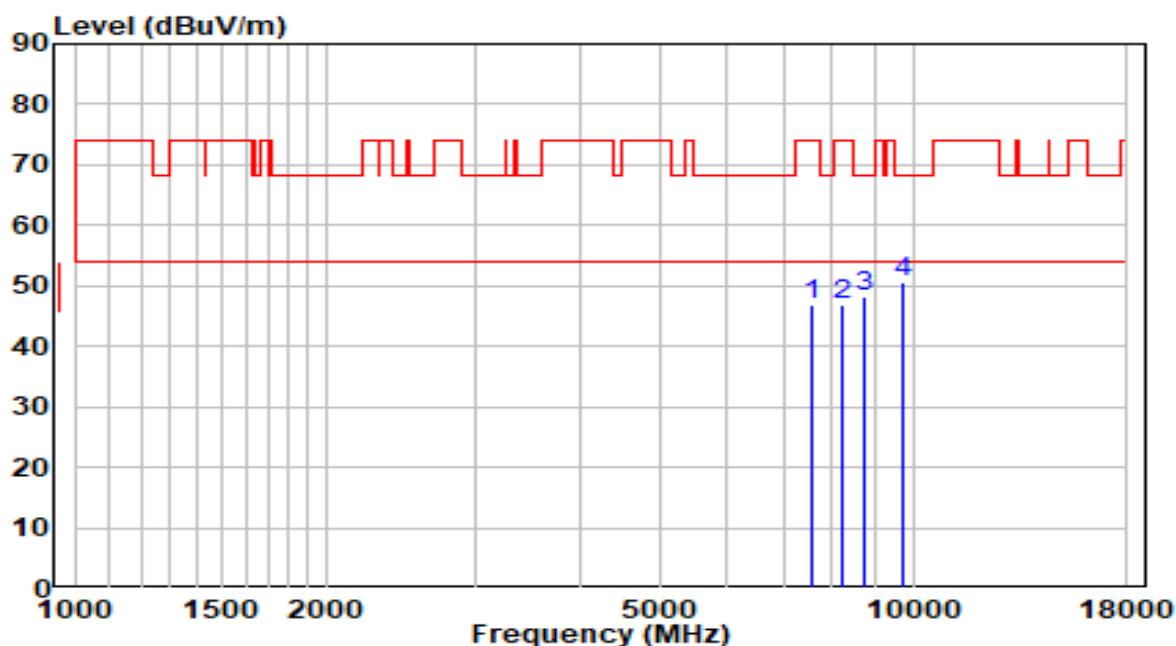


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	35.09	11.87	46.96	-27.04	74.00	Peak
2	8225.000	34.50	12.50	46.99	-27.01	74.00	Peak
3	8769.000	35.04	13.11	48.15	-20.05	68.20	Peak
4	* 9738.000	35.81	14.87	50.68	-17.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz - Beamforming Mode	Test Voltage	110V/60Hz

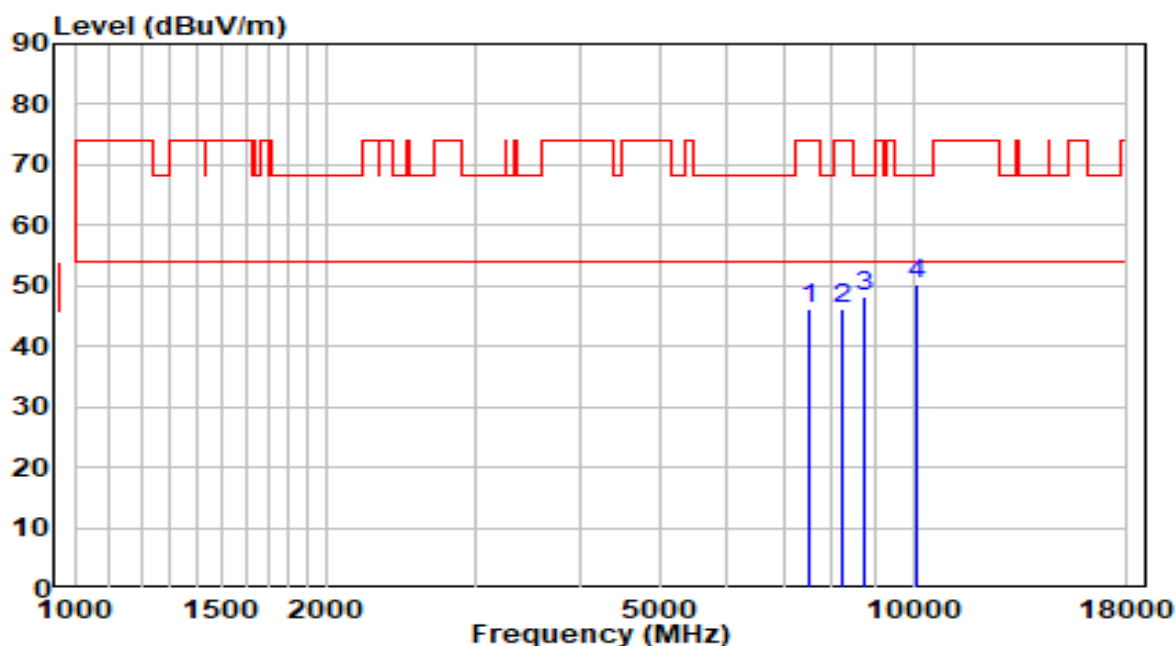


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	34.33	11.75	46.08	-27.92	74.00	Peak
2	8242.000	33.70	12.49	46.20	-27.80	74.00	Peak
3	8752.000	35.17	13.07	48.24	-19.96	68.20	Peak
4	* 10129.000	34.57	15.80	50.37	-17.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz - Beamforming Mode	Test Voltage	110V/60Hz

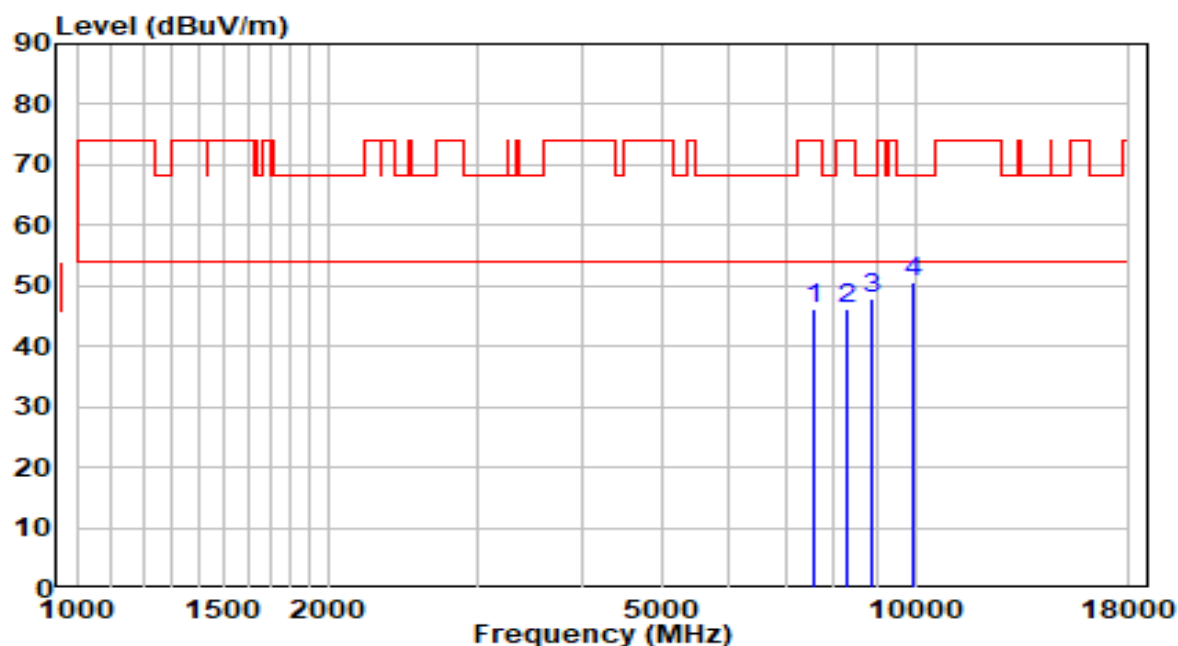


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	34.42	11.83	46.25	-27.75	74.00	Peak
2	8310.000	33.75	12.48	46.23	-27.77	74.00	Peak
3	8862.500	34.52	13.34	47.86	-20.34	68.20	Peak
4	* 9942.000	35.32	15.25	50.57	-17.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz - Beamforming Mode	Test Voltage	110V/60Hz

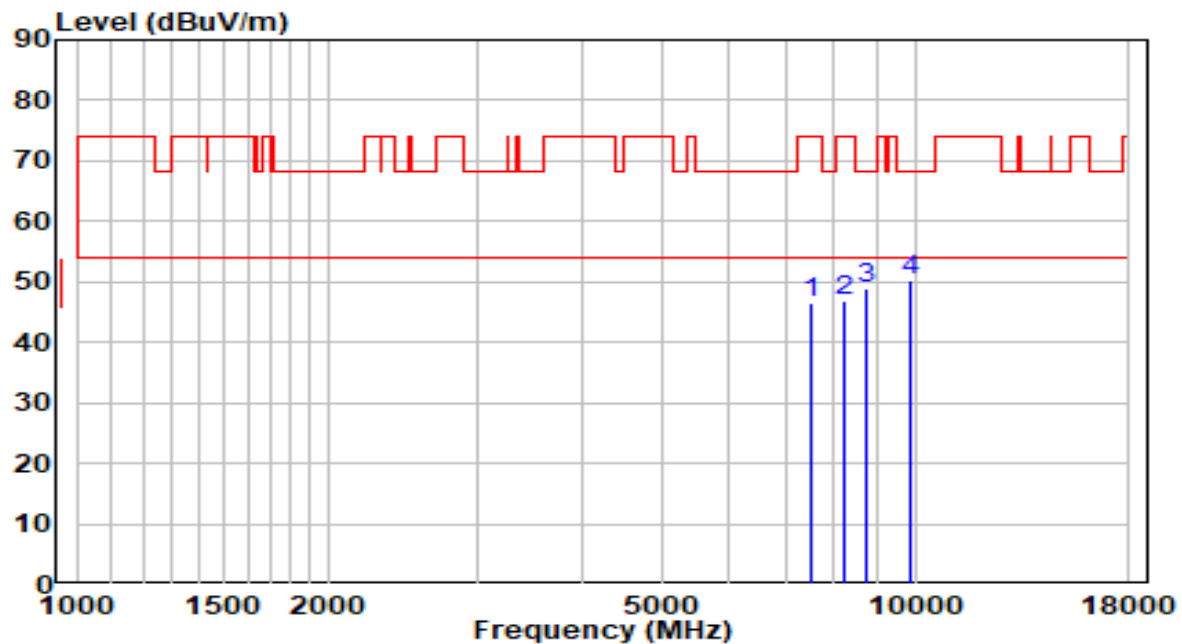


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	34.67	11.72	46.39	-27.61	74.00	Peak
2	8242.000	34.25	12.49	46.75	-27.25	74.00	Peak
3	8718.000	35.78	12.99	48.77	-19.43	68.20	Peak
4	* 9899.500	35.09	15.17	50.26	-17.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz - Beamforming Mode	Test Voltage	110V/60Hz

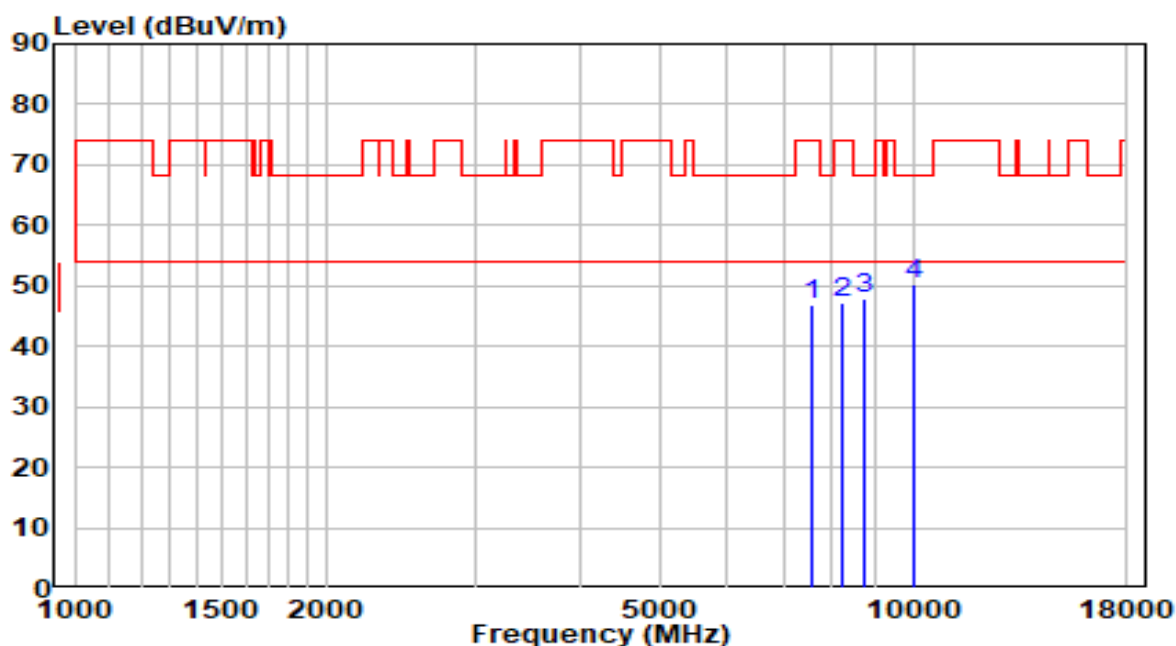


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	34.94	11.80	46.75	-27.25	74.00	Peak
2	8242.000	34.62	12.49	47.11	-26.89	74.00	Peak
3	8752.000	34.84	13.07	47.91	-20.29	68.20	Peak
4	* 10044.000	34.66	15.51	50.17	-18.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz - Beamforming Mode	Test Voltage	110V/60Hz

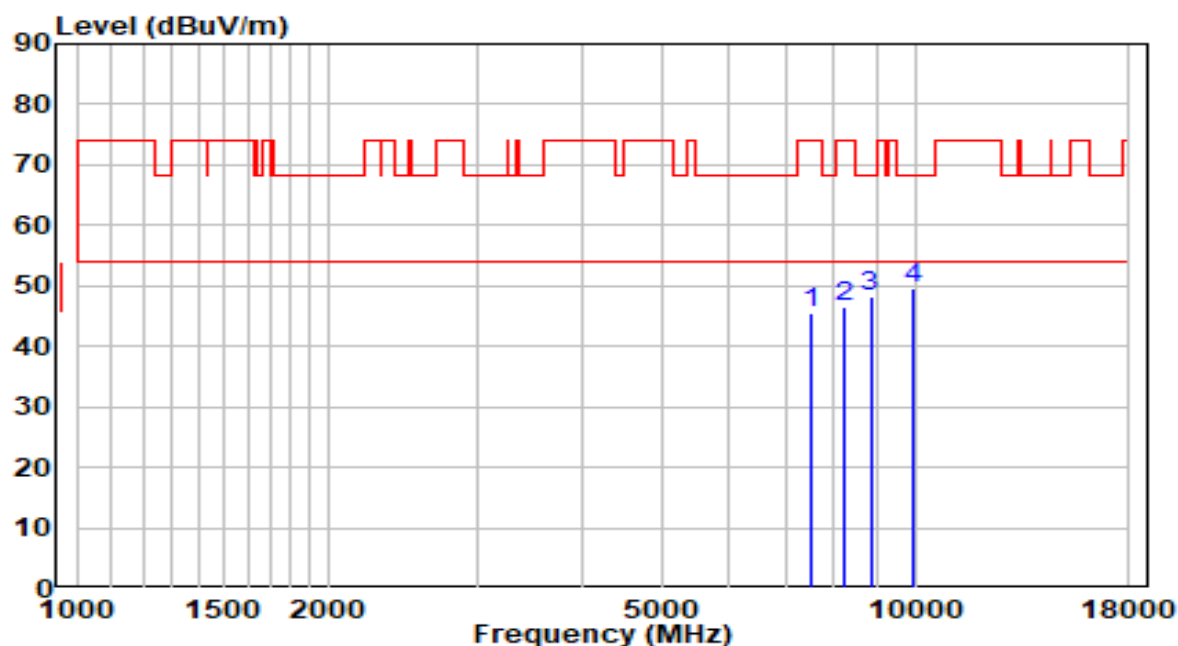


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	33.75	11.77	45.52	-28.48	74.00	Peak
2	8242.000	34.04	12.49	46.54	-27.46	74.00	Peak
3	8845.500	34.80	13.30	48.10	-20.10	68.20	Peak
4	* 9916.500	34.24	15.20	49.44	-18.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz - Beamforming Mode	Test Voltage	110V/60Hz

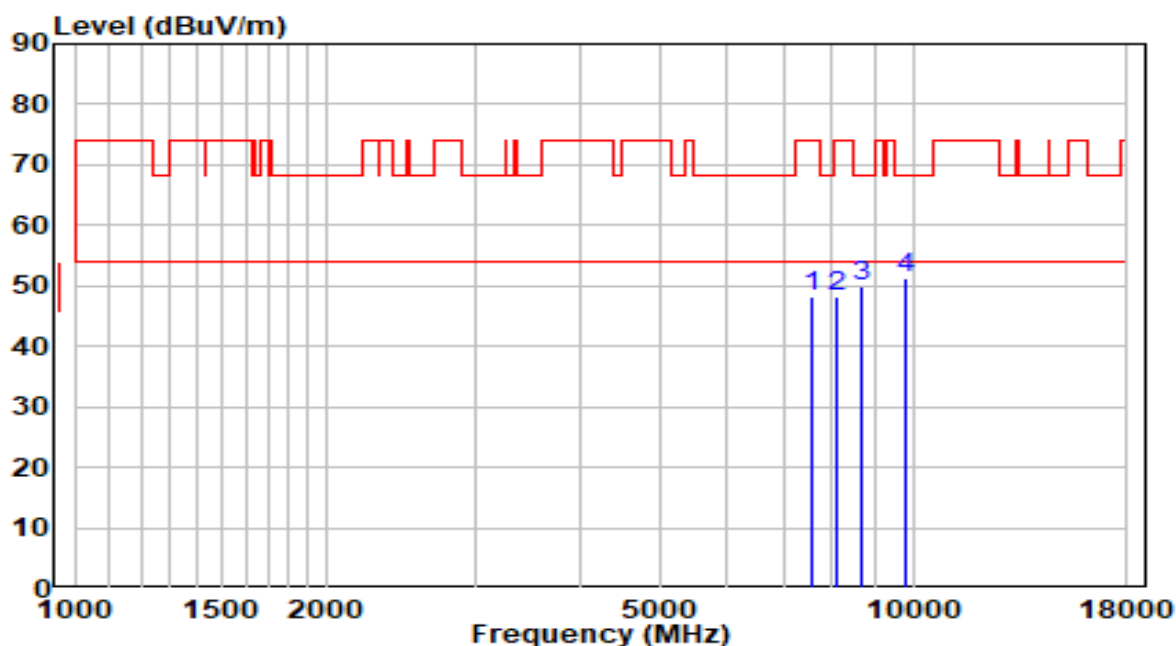


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	36.25	11.83	48.08	-25.92	74.00	Peak
2	8089.000	35.63	12.52	48.15	-25.85	74.00	Peak
3	8650.000	37.19	12.82	50.02	-18.18	68.20	Peak
4	* 9789.000	36.35	14.96	51.31	-16.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz - Beamforming Mode	Test Voltage	110V/60Hz

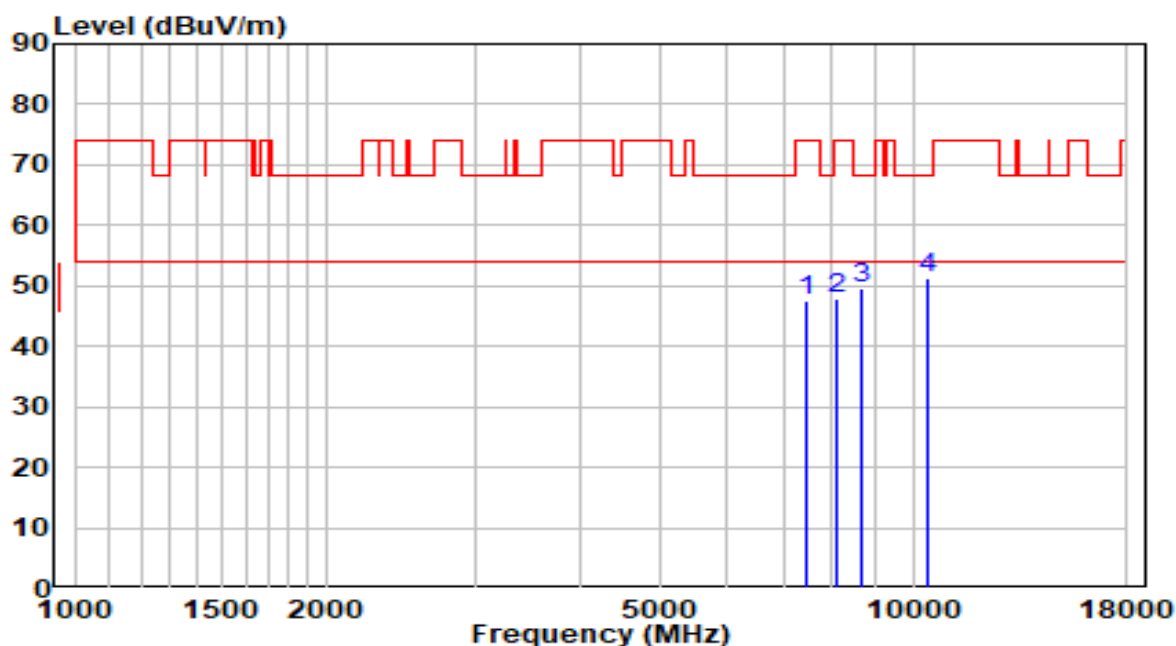


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	36.01	11.65	47.66	-26.34	74.00	Peak
2	8089.000	35.46	12.52	47.97	-26.03	74.00	Peak
3	8692.500	36.59	12.93	49.51	-18.69	68.20	Peak
4	* 10435.000	34.38	16.85	51.23	-16.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz - Beamforming Mode	Test Voltage	110V/60Hz

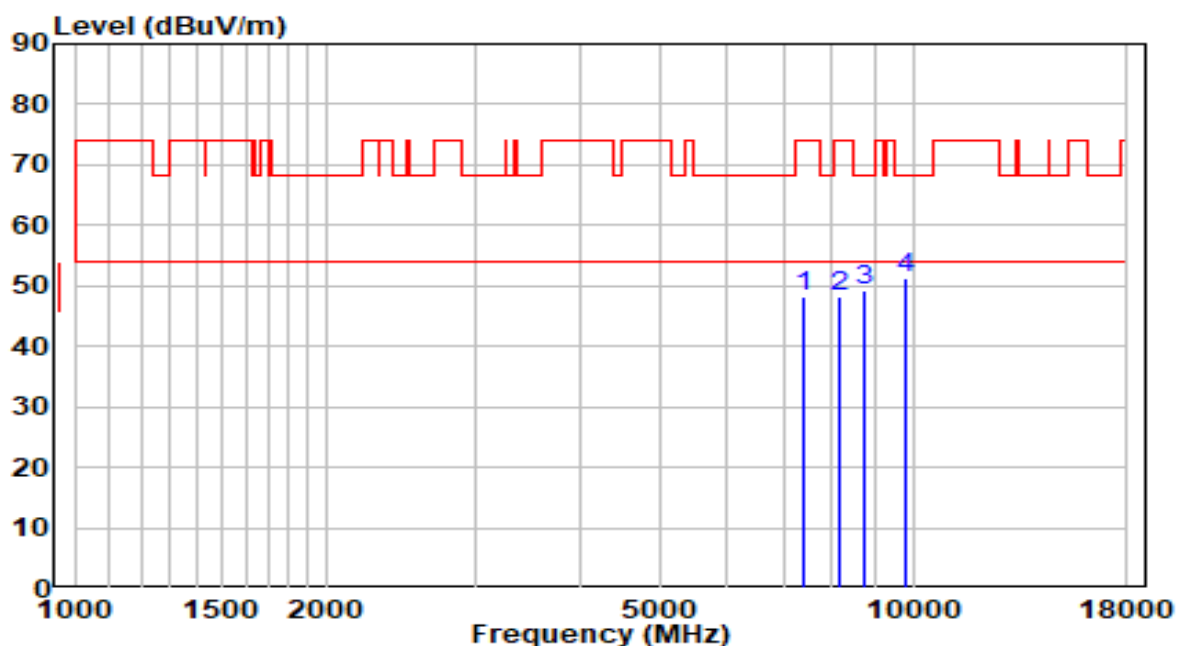


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7383.500	36.79	11.39	48.17	-25.83	74.00	Peak
2	8174.000	35.59	12.50	48.09	-25.91	74.00	Peak
3	8735.000	36.08	13.03	49.11	-19.09	68.20	Peak
4	* 9772.000	36.20	14.93	51.14	-17.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz - Beamforming Mode	Test Voltage	110V/60Hz

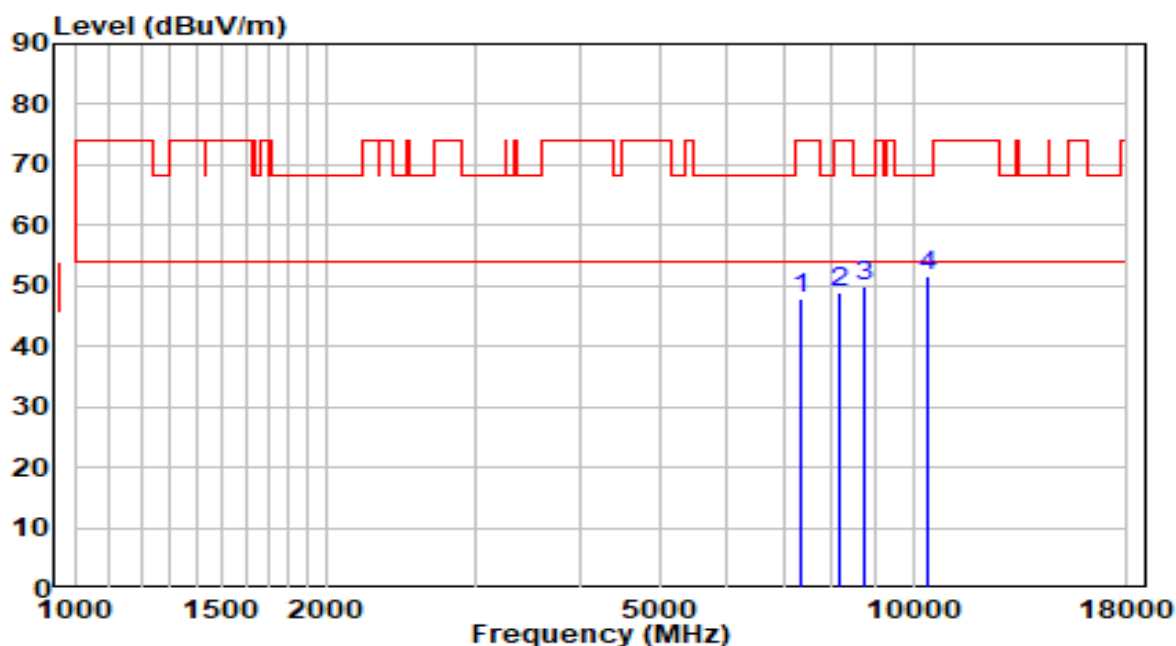


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7358.000	36.72	11.31	48.04	-25.96	74.00	Peak
2	8174.000	36.41	12.50	48.91	-25.09	74.00	Peak
3	8752.000	36.80	13.07	49.87	-18.33	68.20	Peak
4	* 10435.000	34.82	16.85	51.66	-16.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

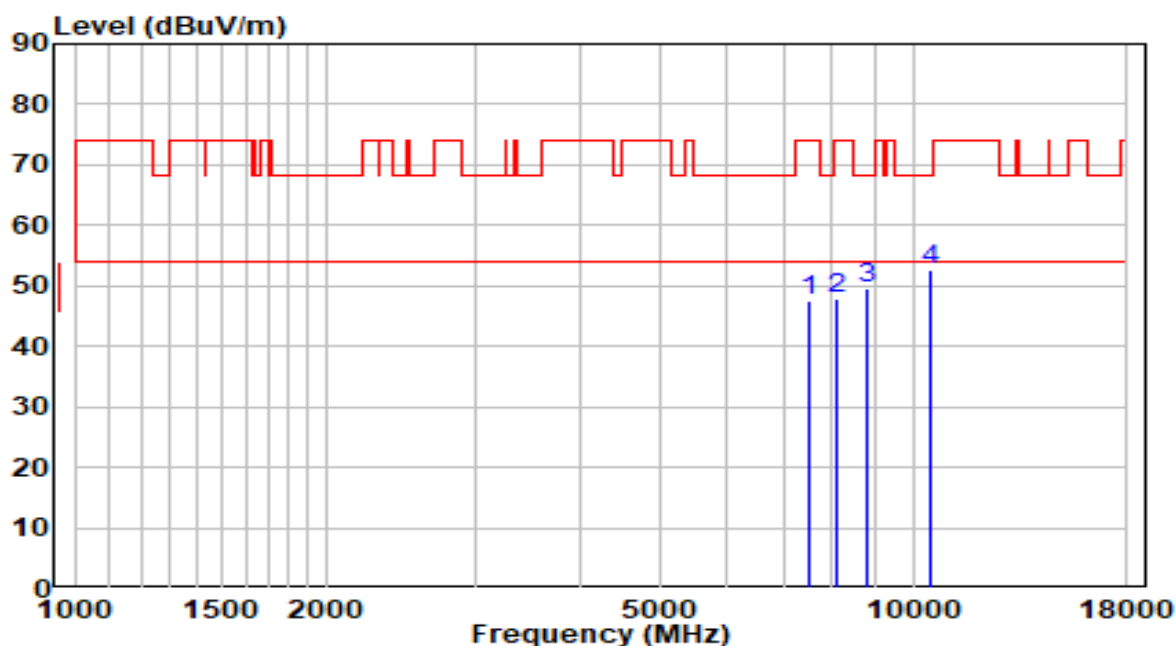


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	35.88	11.72	47.60	-26.40	74.00	Peak
2	8089.000	35.53	12.52	48.05	-25.95	74.00	Peak
3	8811.500	36.33	13.22	49.55	-18.65	68.20	Peak
4	* 10477.500	35.81	16.99	52.81	-15.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

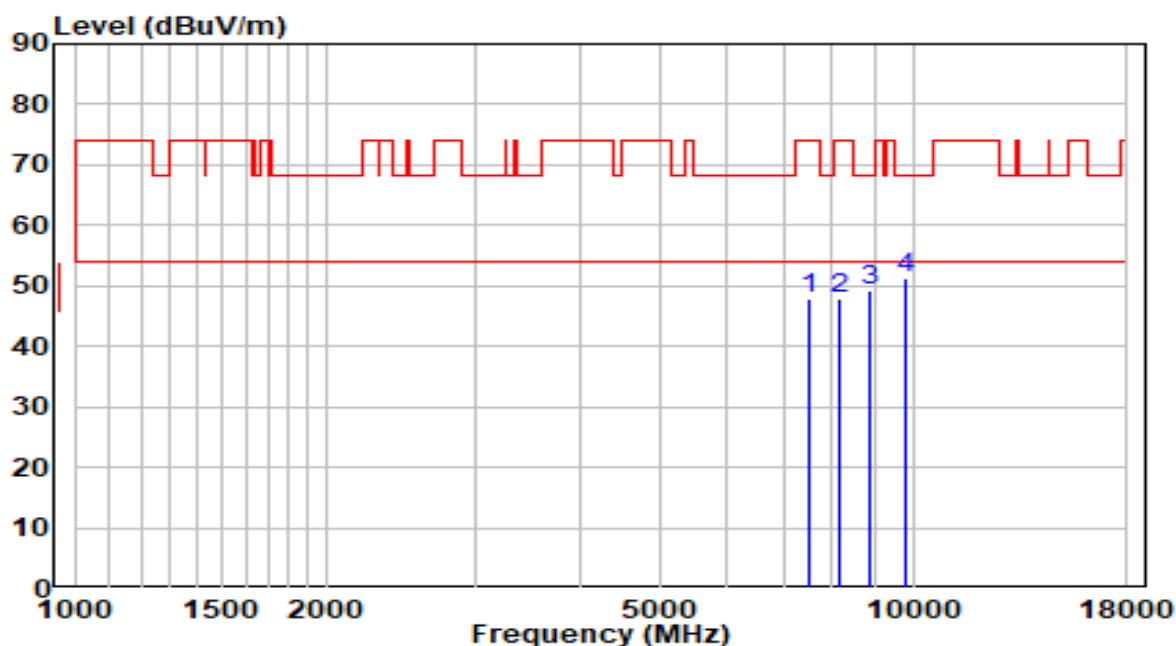


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	36.02	11.73	47.76	-26.24	74.00	Peak
2	8182.500	35.45	12.50	47.95	-26.05	74.00	Peak
3	8905.000	35.76	13.45	49.20	-19.00	68.20	Peak
4	* 9814.500	36.14	15.01	51.15	-17.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz - Beamforming Mode	Test Voltage	110V/60Hz

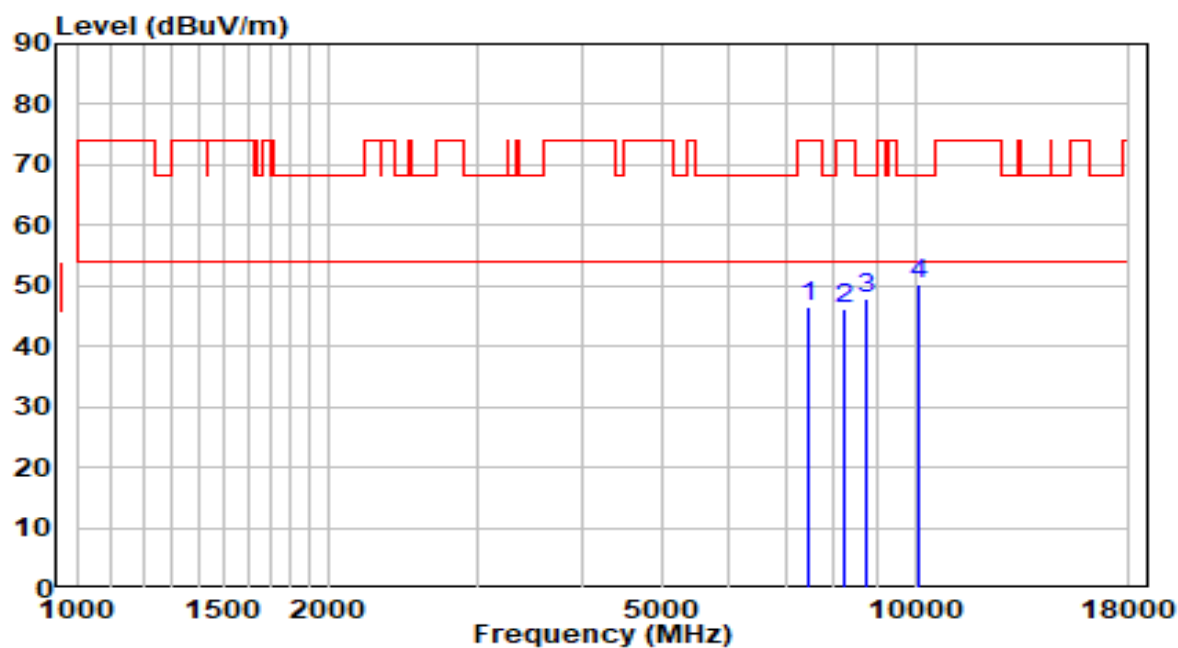


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	34.97	11.60	46.57	-27.43	74.00	Peak
2	8242.000	33.76	12.49	46.25	-27.75	74.00	Peak
3	8769.000	34.88	13.11	47.99	-20.21	68.20	Peak
4	* 10086.500	34.58	15.66	50.23	-17.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz - Beamforming Mode	Test Voltage	110V/60Hz

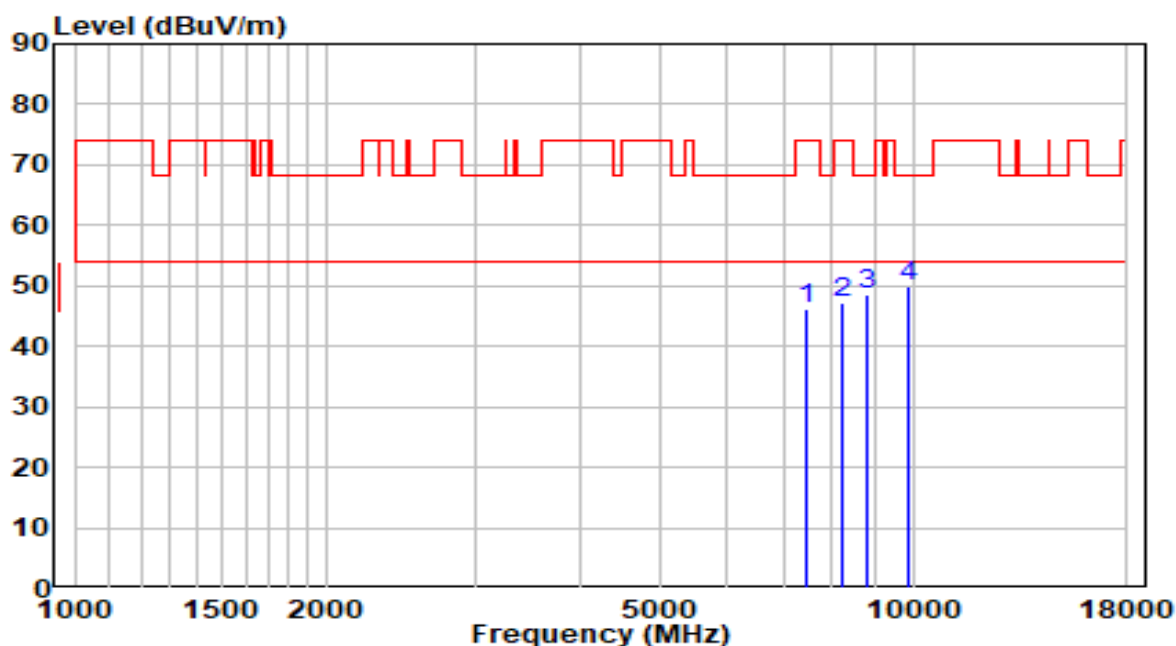


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	34.43	11.67	46.11	-27.89	74.00	Peak
2	8242.000	34.66	12.49	47.15	-26.85	74.00	Peak
3	8811.500	35.31	13.22	48.53	-19.67	68.20	Peak
4	* 9899.500	34.77	15.17	49.94	-18.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz - Beamforming Mode	Test Voltage	110V/60Hz

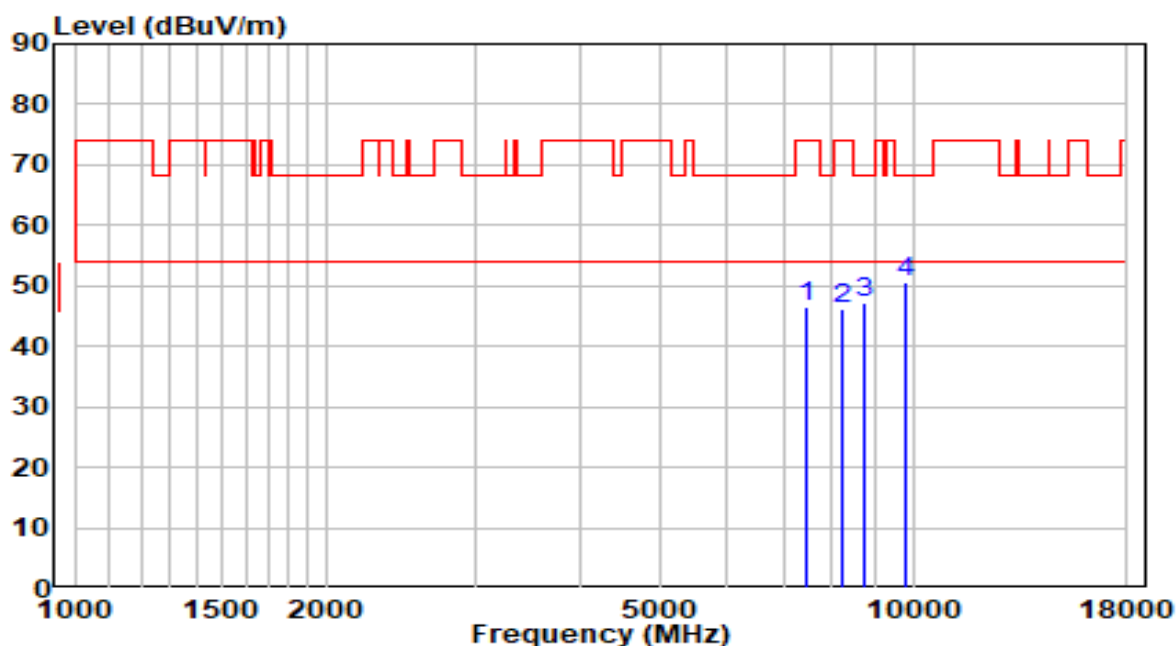


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	34.95	11.67	46.62	-27.38	74.00	Peak
2	8225.000	33.80	12.50	46.29	-27.71	74.00	Peak
3	8769.000	34.10	13.11	47.21	-20.99	68.20	Peak
4	* 9814.500	35.44	15.01	50.45	-17.75	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz - Beamforming Mode	Test Voltage	110V/60Hz

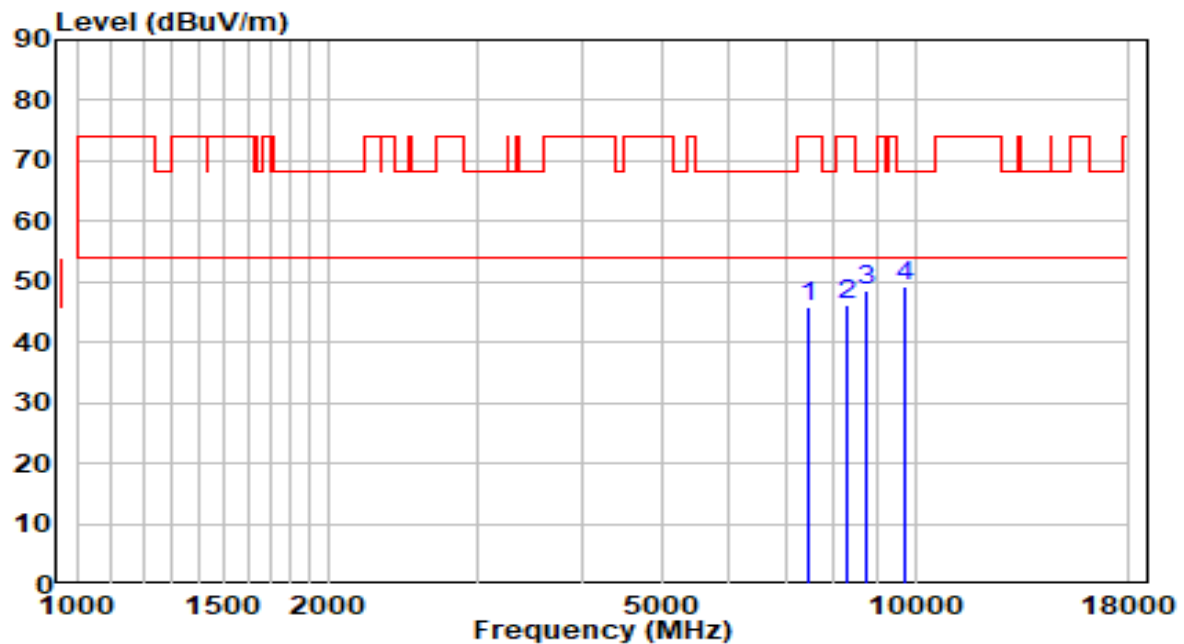


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	34.39	11.60	45.99	-28.01	74.00	Peak
2	8310.000	33.58	12.48	46.07	-27.93	74.00	Peak
3	8769.000	35.44	13.11	48.55	-19.65	68.20	Peak
4	* 9755.000	34.41	14.90	49.31	-18.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz - Beamforming Mode	Test Voltage	110V/60Hz

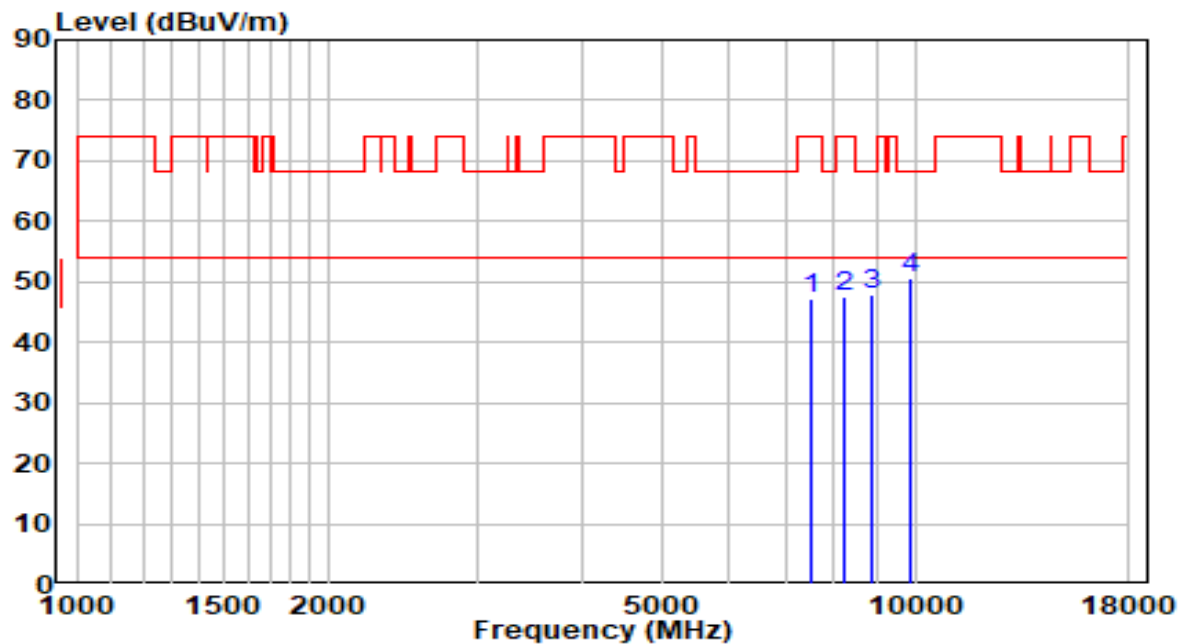


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	35.49	11.72	47.21	-26.79	74.00	Peak
2	8259.000	35.02	12.49	47.51	-26.49	74.00	Peak
3	8879.500	34.48	13.38	47.86	-20.34	68.20	Peak
4	* 9840.000	35.46	15.06	50.52	-17.68	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz - Beamforming Mode	Test Voltage	110V/60Hz

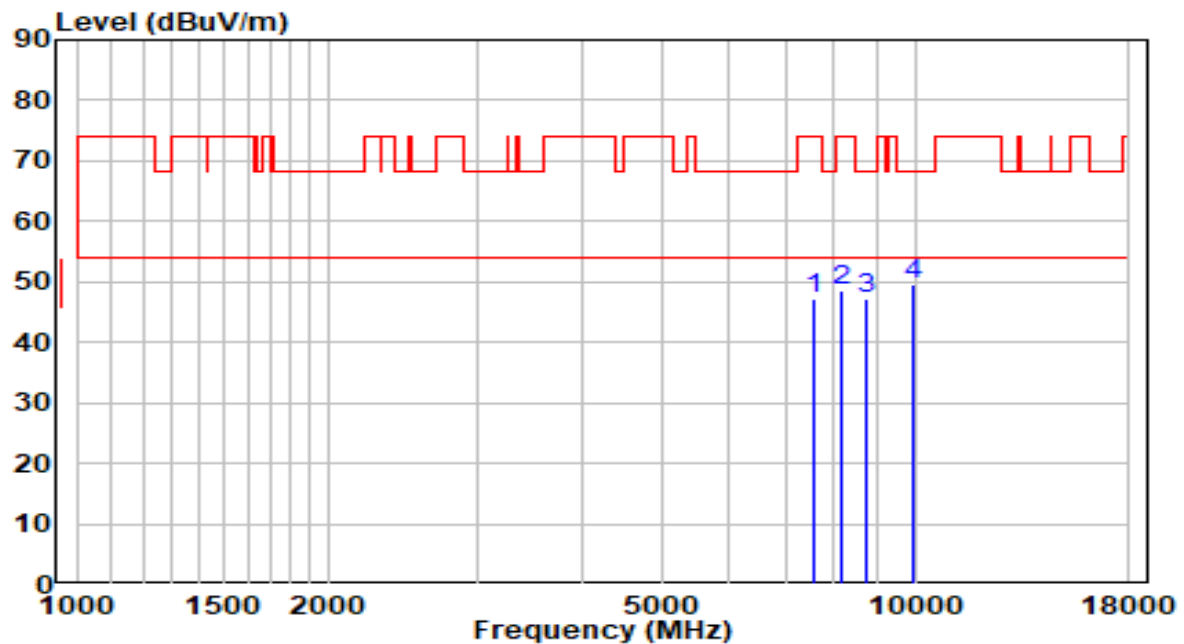


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	35.21	11.83	47.04	-26.96	74.00	Peak
2	8191.000	36.04	12.50	48.55	-25.45	74.00	Peak
3	8769.000	34.22	13.11	47.34	-20.86	68.20	Peak
4	* 9916.500	34.48	15.20	49.68	-18.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz - Beamforming Mode	Test Voltage	110V/60Hz

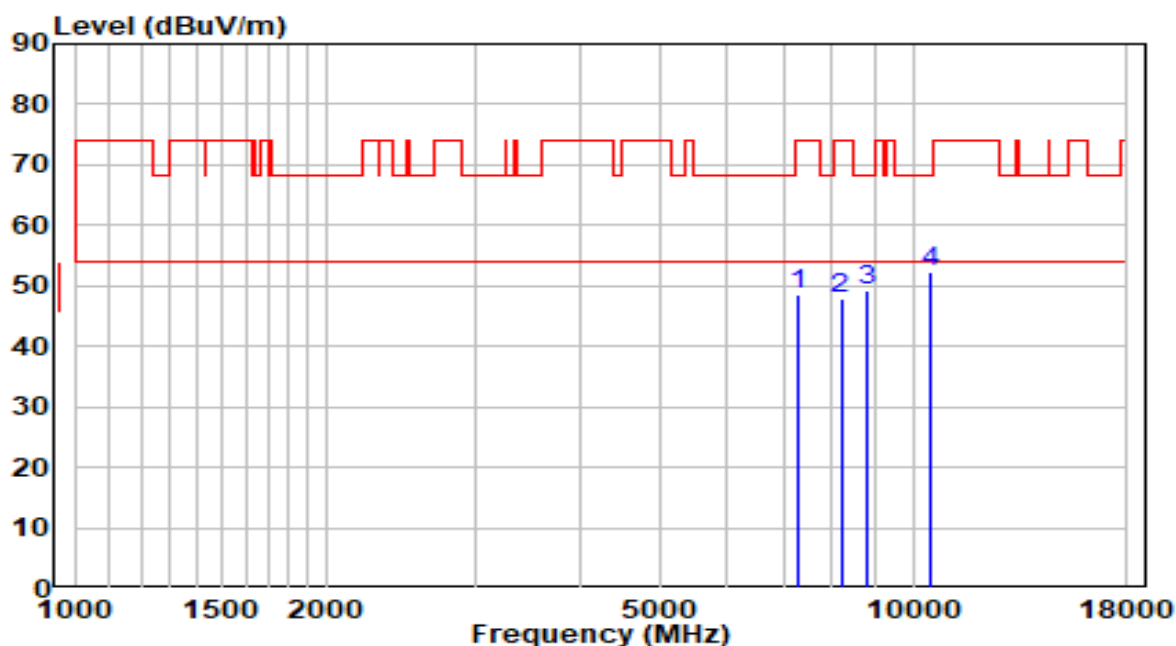


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7281.500	37.46	11.10	48.55	-25.45	74.00	Peak
2	8199.500	35.48	12.50	47.98	-26.02	74.00	Peak
3	8811.500	35.98	13.22	49.20	-19.00	68.20	Peak
4	* 10486.000	35.27	17.02	52.29	-15.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz - Beamforming Mode	Test Voltage	110V/60Hz

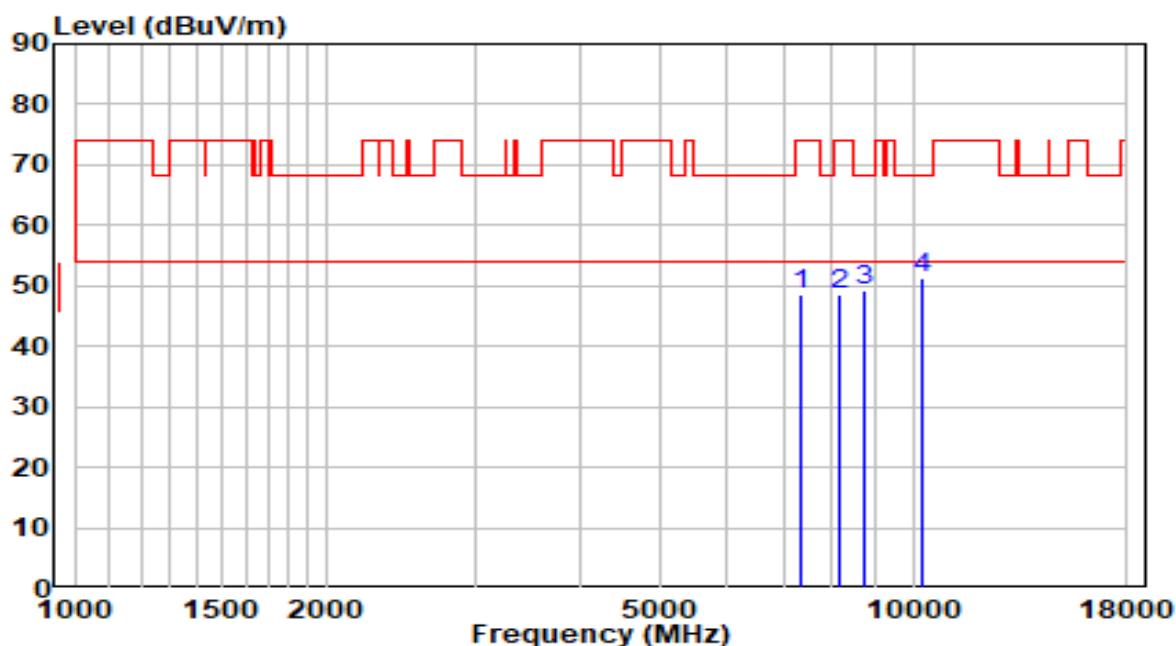


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7358.000	37.13	11.31	48.44	-25.56	74.00	Peak
2	8182.500	36.10	12.50	48.60	-25.40	74.00	Peak
3	8718.000	36.26	12.99	49.25	-18.95	68.20	Peak
4	* 10239.500	35.13	16.18	51.31	-16.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

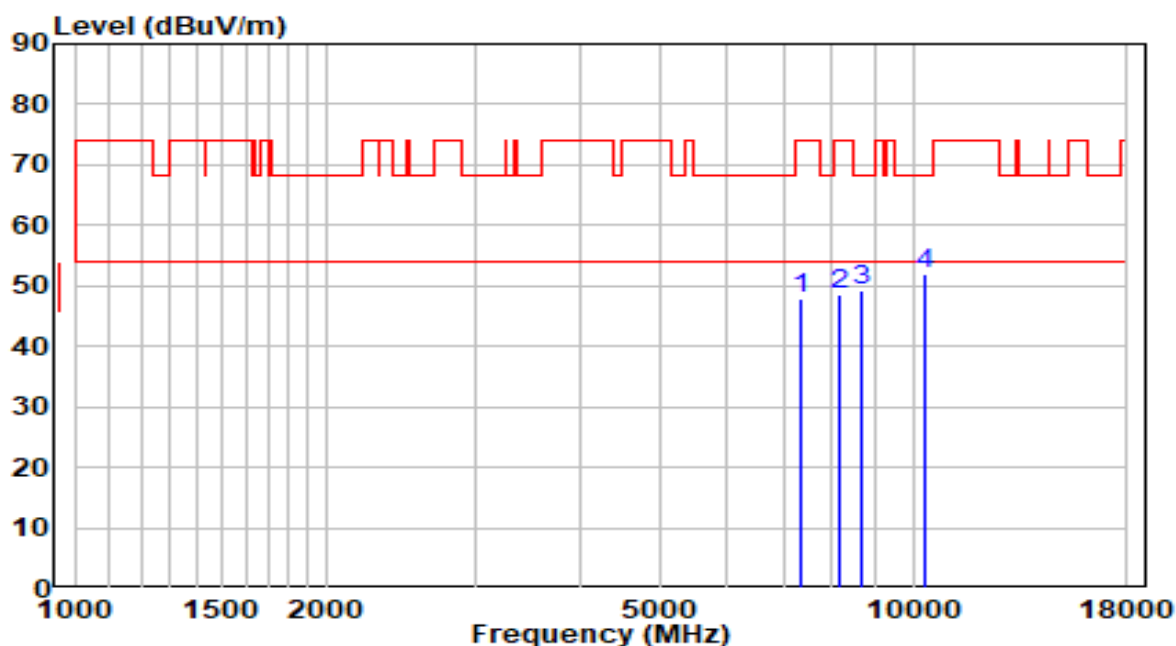


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7349.500	36.47	11.29	47.76	-26.24	74.00	Peak
2	8165.500	35.90	12.51	48.40	-25.60	74.00	Peak
3	8650.000	36.51	12.82	49.33	-18.87	68.20	Peak
4	* 10358.500	35.39	16.59	51.98	-16.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

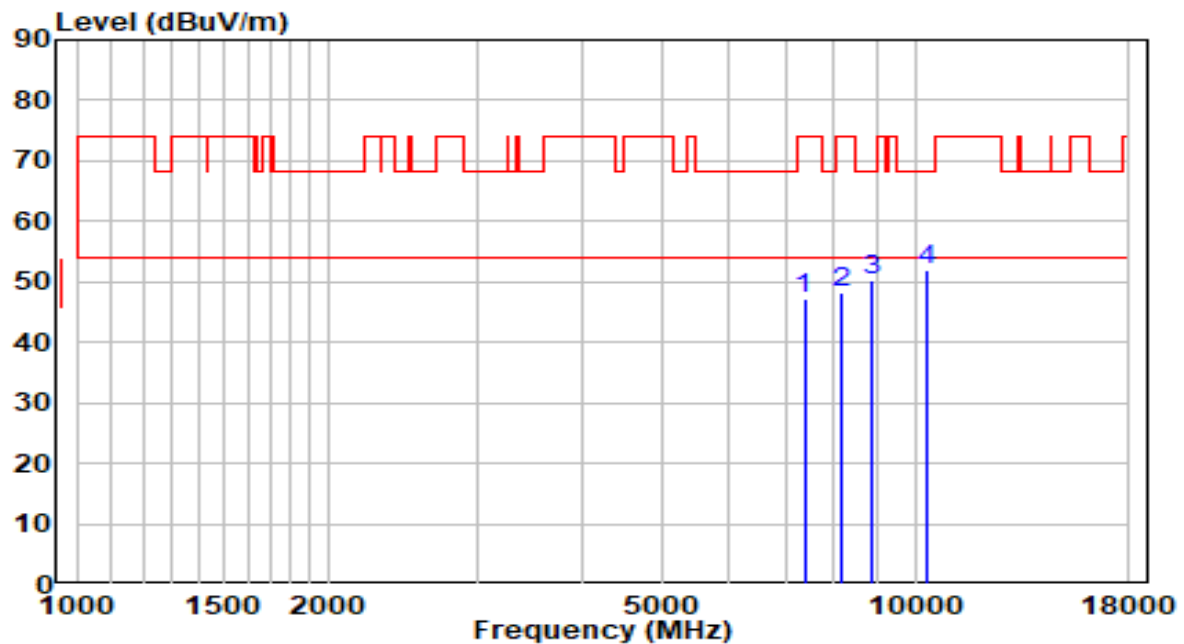


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7375.000	35.85	11.36	47.21	-26.79	74.00	Peak
2	8165.500	35.79	12.51	48.29	-25.71	74.00	Peak
3	8862.500	36.82	13.34	50.16	-18.04	68.20	Peak
4	* 10358.500	35.36	16.59	51.95	-16.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz - Beamforming Mode	Test Voltage	110V/60Hz

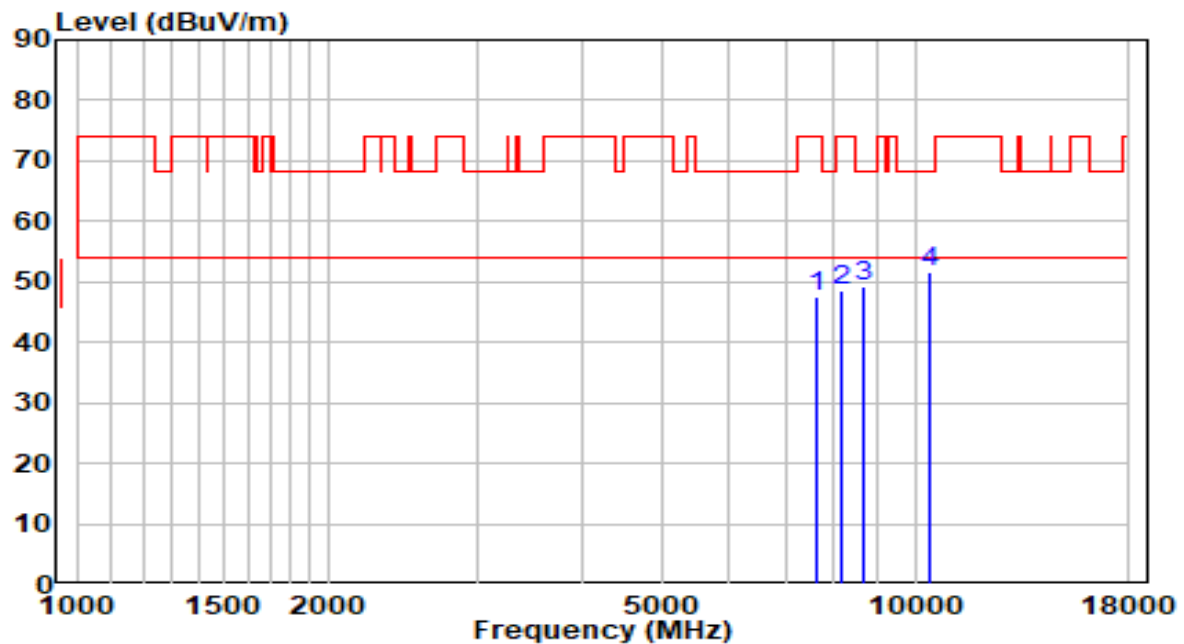


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7655.500	35.45	11.97	47.42	-26.58	74.00	Peak
2	8157.000	36.07	12.51	48.58	-25.42	74.00	Peak
3	8692.500	36.43	12.93	49.36	-18.84	68.20	Peak
4	* 10435.000	34.82	16.85	51.66	-16.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz - Beamforming Mode	Test Voltage	110V/60Hz

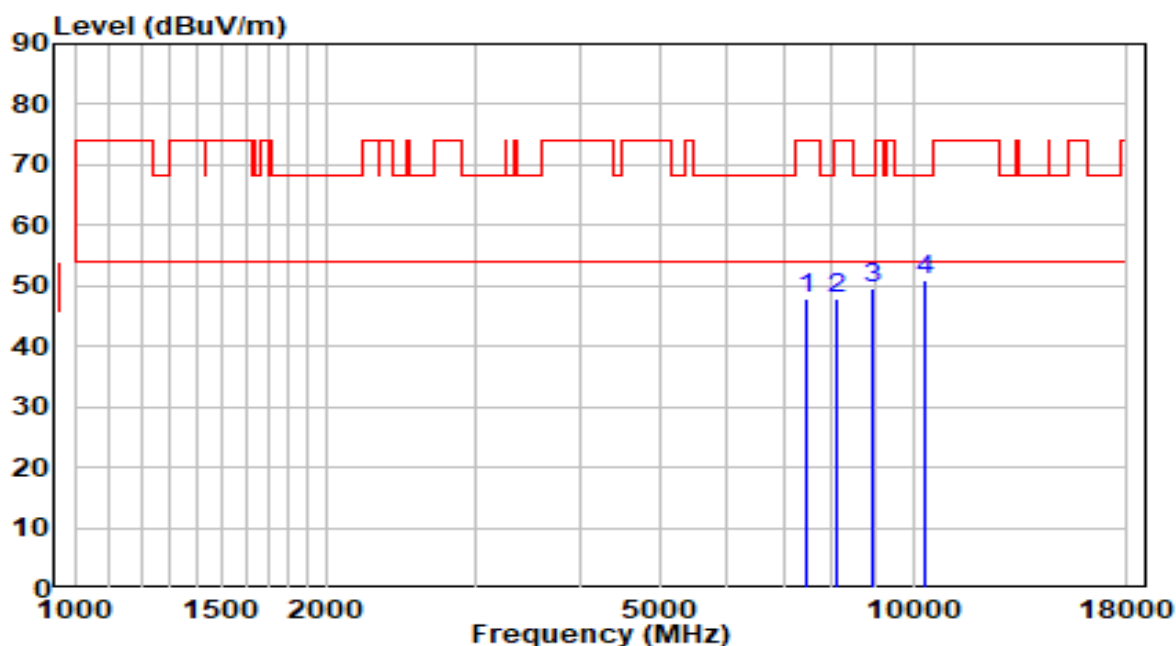


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7477.000	36.23	11.65	47.88	-26.12	74.00	Peak
2	8114.500	35.40	12.51	47.91	-26.09	74.00	Peak
3	8922.000	36.13	13.49	49.62	-18.58	68.20	Peak
4	* 10350.000	34.54	16.56	51.09	-17.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz - Beamforming Mode	Test Voltage	110V/60Hz

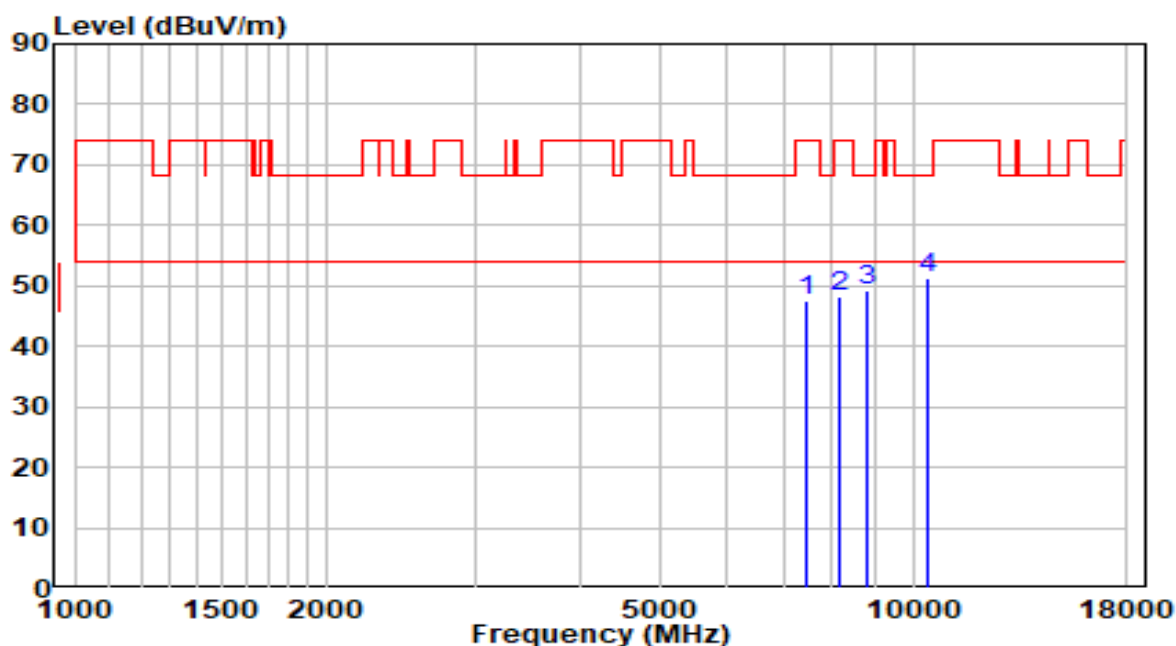


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	36.14	11.55	47.69	-26.31	74.00	Peak
2	8165.500	35.75	12.51	48.25	-25.75	74.00	Peak
3	8786.000	36.25	13.16	49.40	-18.80	68.20	Peak
4	* 10384.000	34.77	16.67	51.44	-16.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz - Beamforming Mode	Test Voltage	110V/60Hz

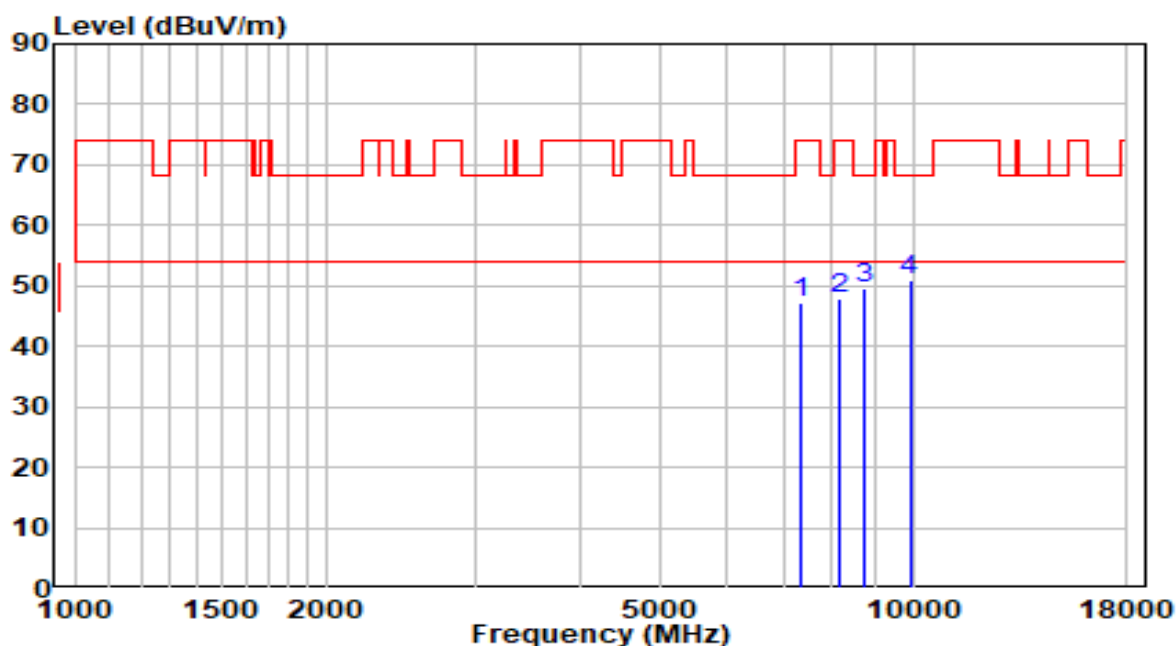


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7366.500	35.82	11.34	47.16	-26.84	74.00	Peak
2	8157.000	35.54	12.51	48.05	-25.95	74.00	Peak
3	8735.000	36.41	13.03	49.44	-18.76	68.20	Peak
4	* 9908.000	35.86	15.19	51.05	-17.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz - Beamforming Mode	Test Voltage	110V/60Hz

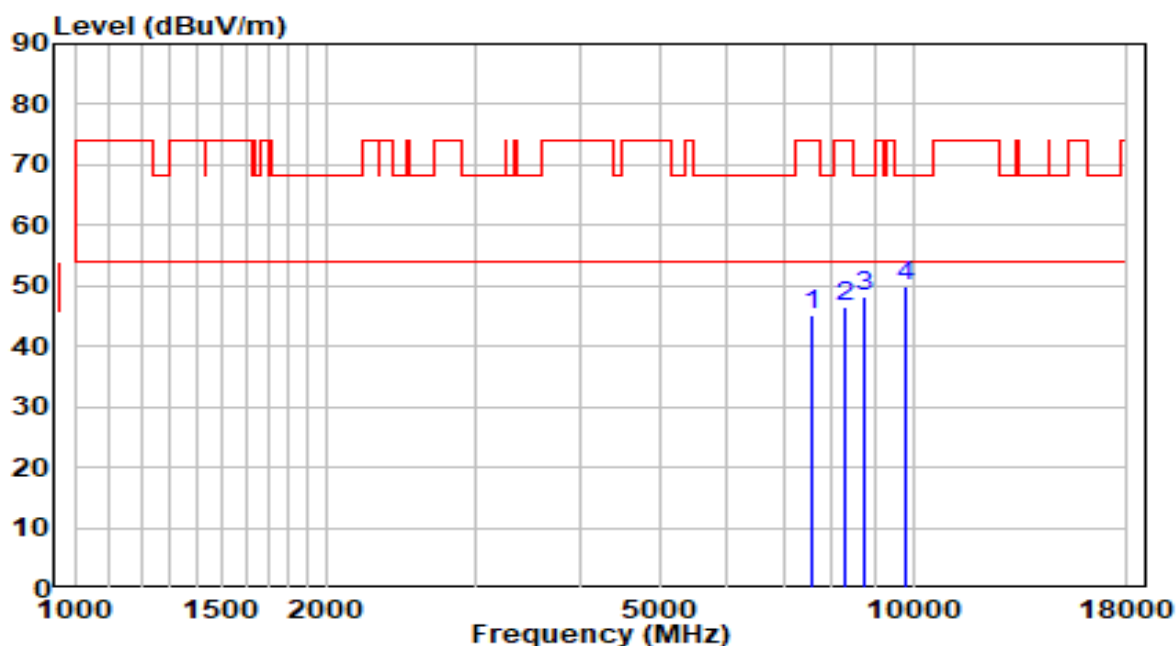


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	33.39	11.80	45.19	-28.81	74.00	Peak
2	8310.000	34.03	12.48	46.51	-27.49	74.00	Peak
3	8752.000	35.26	13.07	48.34	-19.86	68.20	Peak
4	* 9797.500	34.93	14.98	49.91	-18.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz - Beamforming Mode	Test Voltage	110V/60Hz

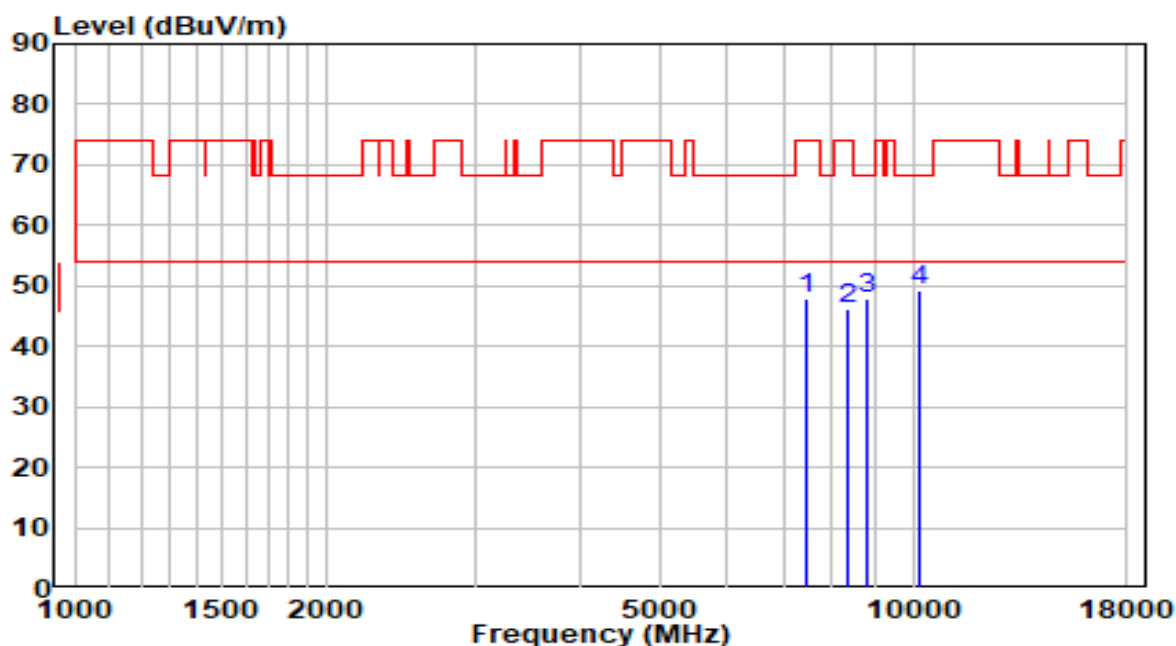


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	36.23	11.55	47.79	-26.21	74.00	Peak
2	8327.000	33.77	12.48	46.25	-27.75	74.00	Peak
3	8794.500	34.64	13.18	47.81	-20.39	68.20	Peak
4	* 10146.000	33.52	15.86	49.38	-18.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz - Beamforming Mode	Test Voltage	110V/60Hz

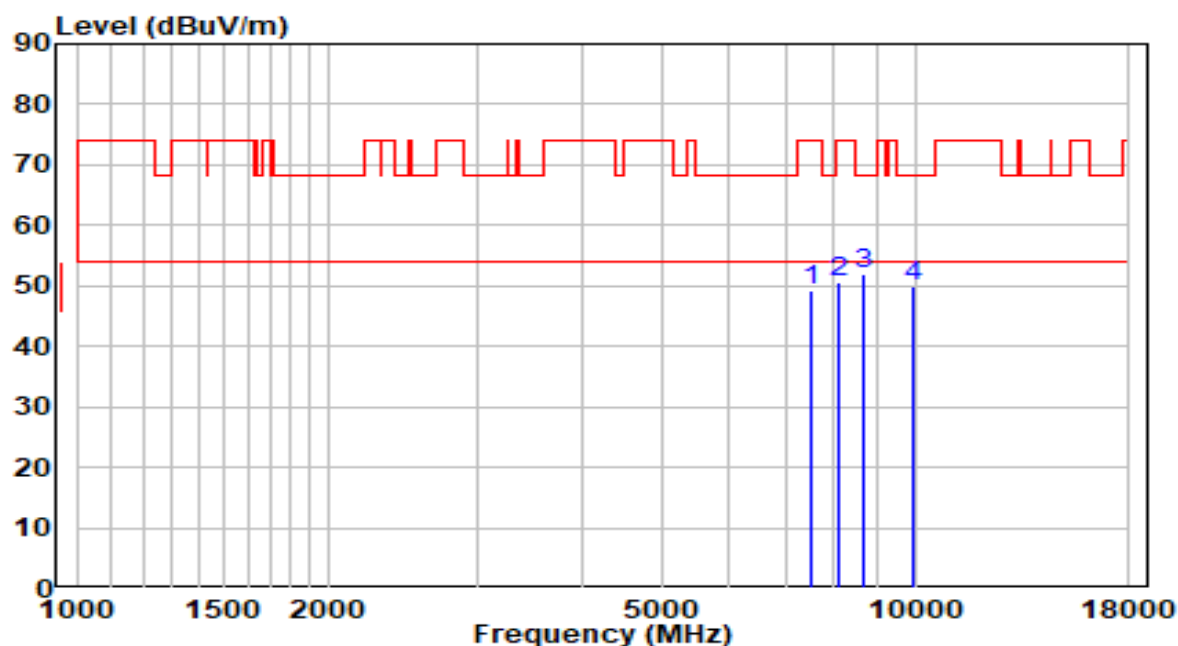


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	37.46	11.73	49.19	-24.81	74.00	Peak
2	8097.500	38.23	12.52	50.74	-23.26	74.00	Peak
3	* 8692.500	39.00	12.93	51.93	-16.27	68.20	Peak
4	9959.000	34.65	15.28	49.93	-18.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz - Beamforming Mode	Test Voltage	110V/60Hz

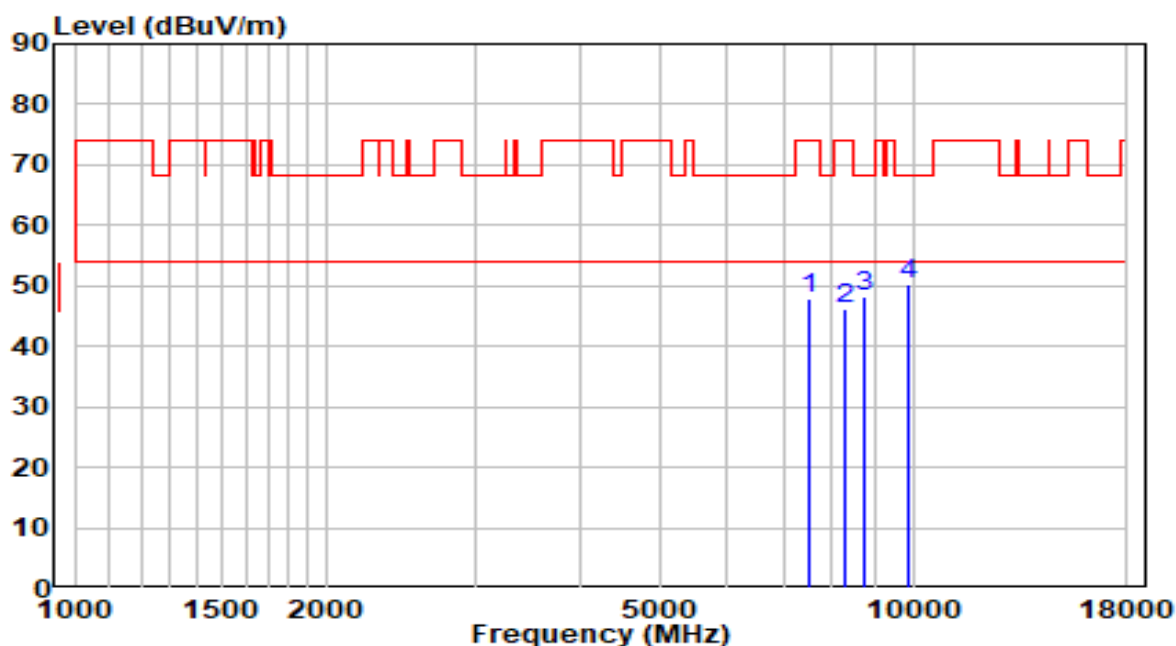


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	36.13	11.72	47.85	-26.15	74.00	Peak
2	8276.000	33.86	12.49	46.35	-27.65	74.00	Peak
3	8735.000	35.29	13.03	48.32	-19.88	68.20	Peak
4	* 9899.500	35.08	15.17	50.25	-17.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz - Beamforming Mode	Test Voltage	110V/60Hz

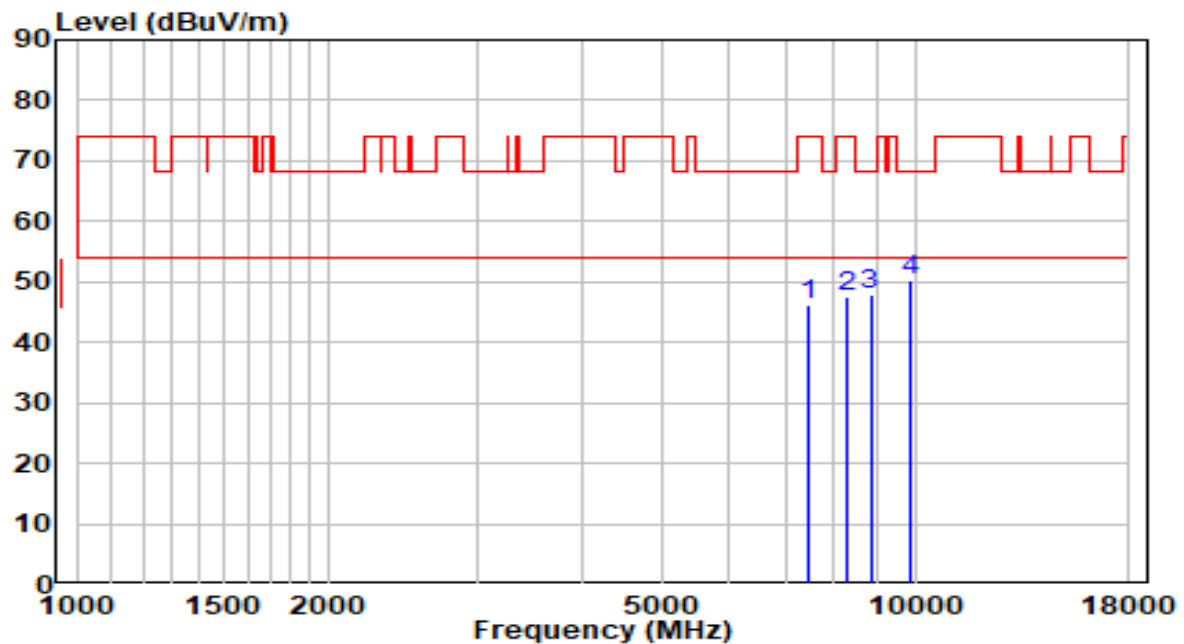


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	34.63	11.65	46.28	-27.72	74.00	Peak
2	8310.000	35.16	12.48	47.64	-26.36	74.00	Peak
3	8845.500	34.55	13.30	47.85	-20.35	68.20	Peak
4	* 9899.500	35.12	15.17	50.29	-17.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz - Beamforming Mode	Test Voltage	110V/60Hz

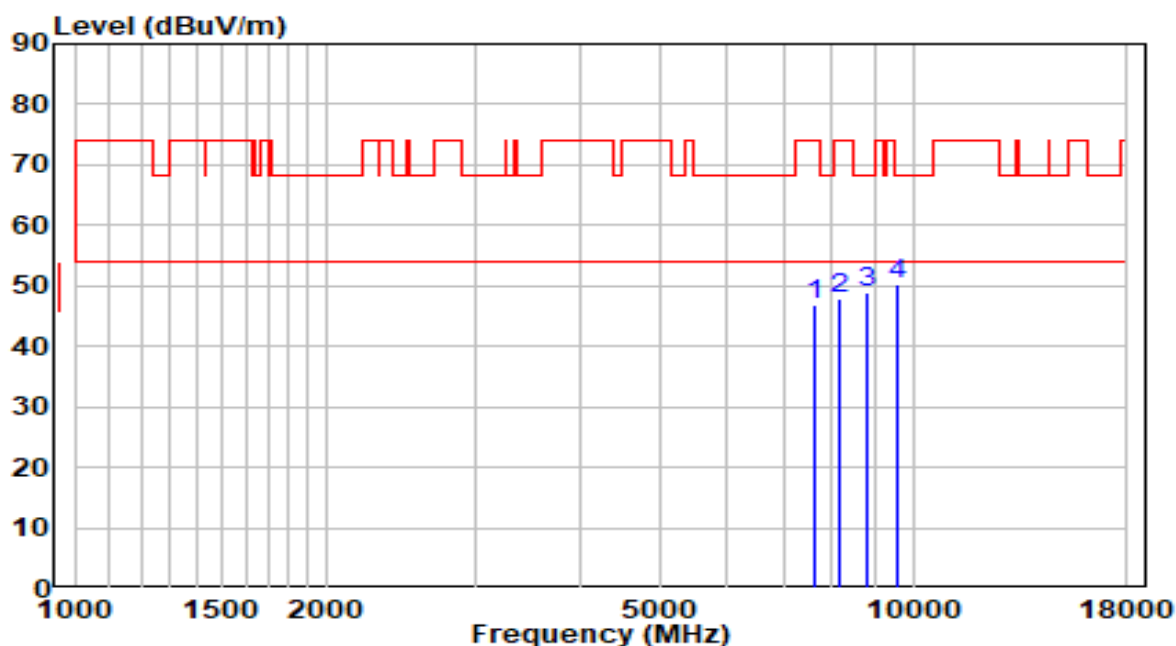


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	34.83	11.90	46.73	-27.27	74.00	Peak
2	8157.000	35.45	12.51	47.95	-26.05	74.00	Peak
3	8794.500	35.76	13.18	48.94	-19.26	68.20	Peak
4	* 9593.500	35.76	14.60	50.35	-17.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz - Beamforming Mode	Test Voltage	110V/60Hz

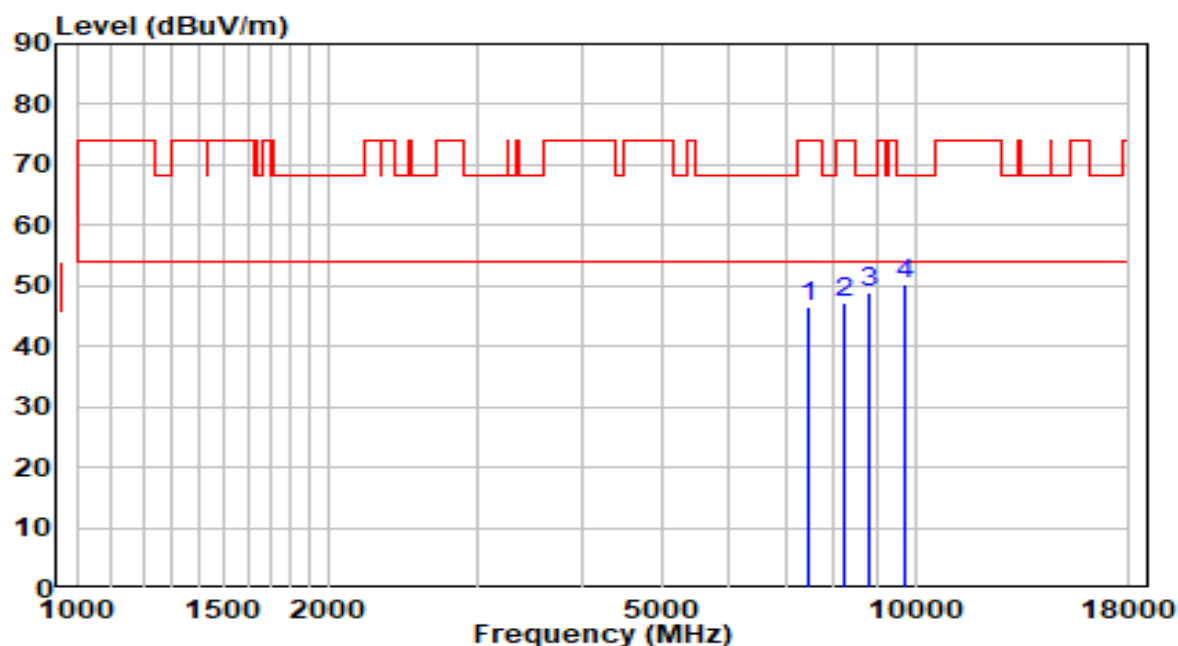


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	34.99	11.65	46.64	-27.36	74.00	Peak
2	8225.000	34.65	12.50	47.15	-26.85	74.00	Peak
3	8811.500	35.68	13.22	48.90	-19.30	68.20	Peak
4	* 9712.500	35.54	14.82	50.36	-17.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz - Beamforming Mode	Test Voltage	110V/60Hz

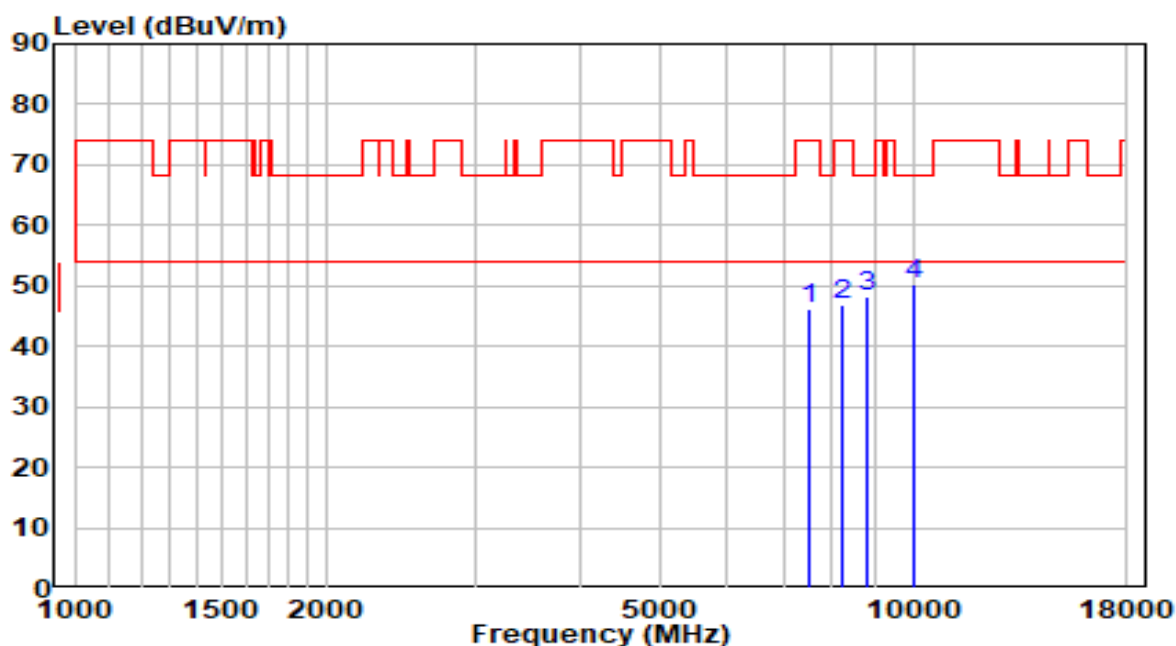


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	34.55	11.77	46.33	-27.67	74.00	Peak
2	8225.000	34.24	12.50	46.73	-27.27	74.00	Peak
3	8828.500	34.88	13.26	48.14	-20.06	68.20	Peak
4	* 10001.500	34.75	15.37	50.12	-18.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz - Beamforming Mode	Test Voltage	110V/60Hz

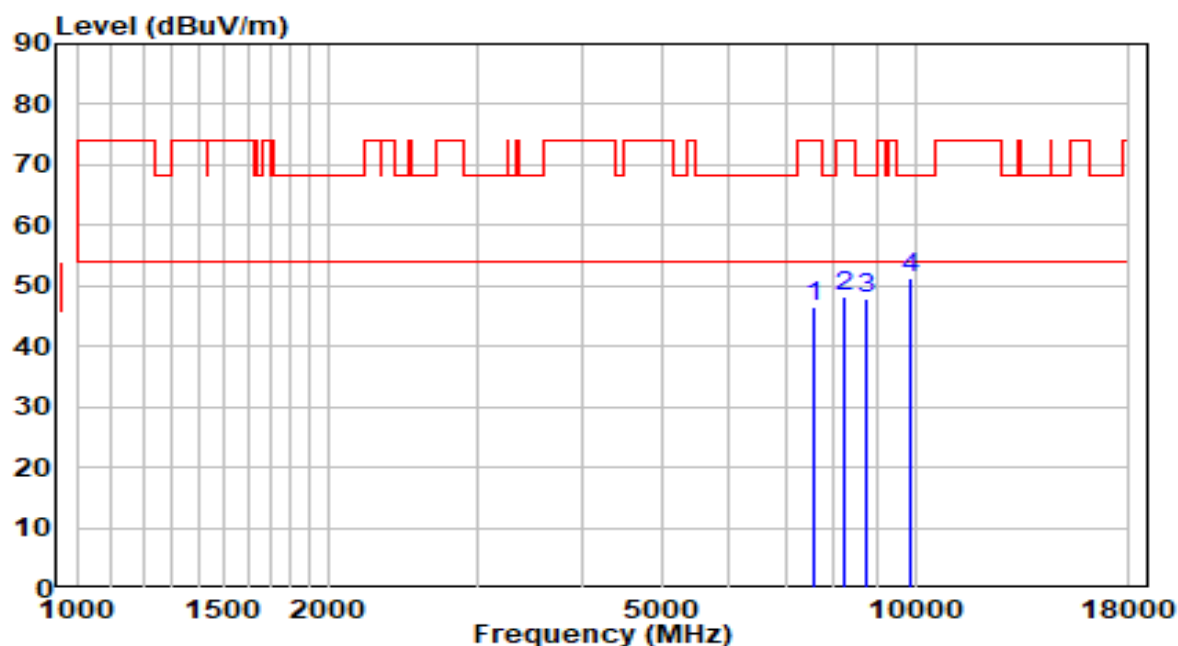


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	34.73	11.83	46.56	-27.44	74.00	Peak
2	8225.000	35.77	12.50	48.26	-25.74	74.00	Peak
3	8769.000	34.92	13.11	48.04	-20.16	68.20	Peak
4	* 9857.000	36.04	15.09	51.13	-17.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz - Beamforming Mode	Test Voltage	110V/60Hz

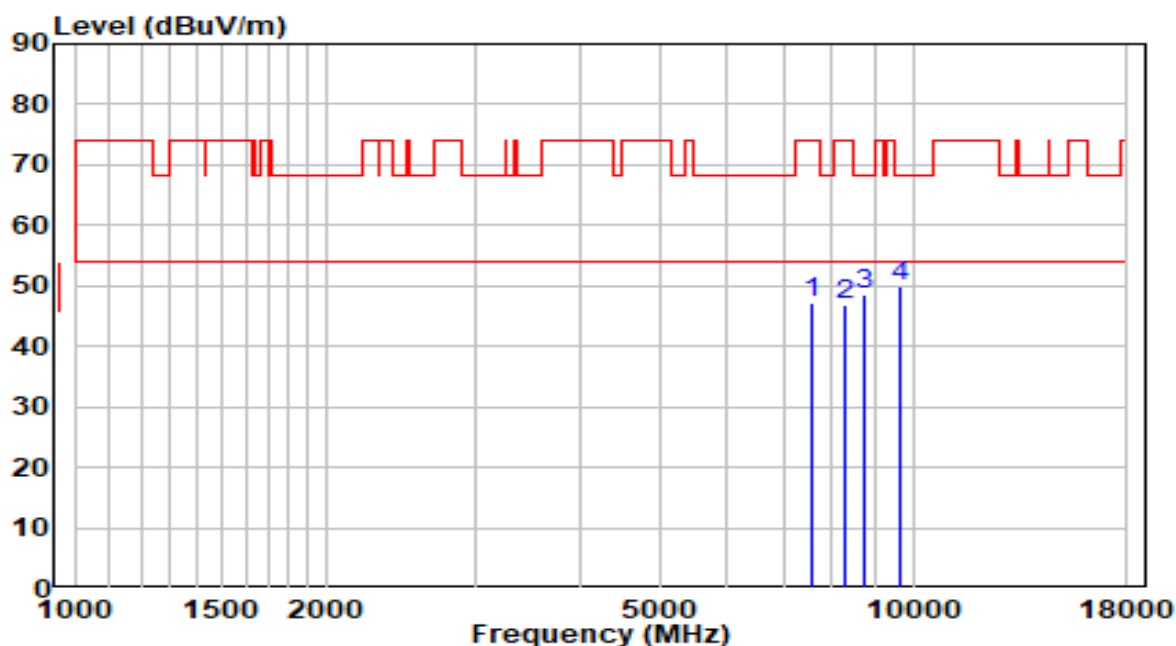


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7587.500	35.44	11.86	47.30	-26.70	74.00	Peak
2	8310.000	34.37	12.48	46.86	-27.14	74.00	Peak
3	8769.000	35.48	13.11	48.60	-19.60	68.20	Peak
4	* 9653.000	35.07	14.71	49.78	-18.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz - Beamforming Mode	Test Voltage	110V/60Hz

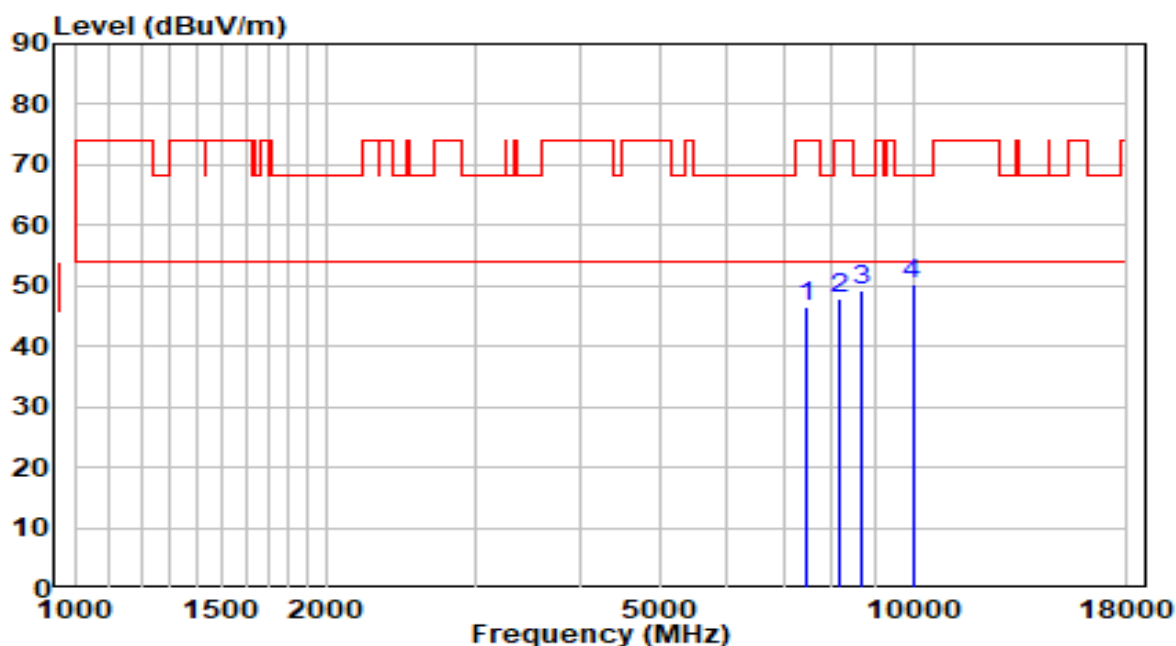


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	35.01	11.60	46.61	-27.39	74.00	Peak
2	8140.000	35.41	12.51	47.92	-26.08	74.00	Peak
3	8667.000	36.42	12.86	49.29	-18.91	68.20	Peak
4	* 9984.500	35.00	15.33	50.33	-17.87	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz - Beamforming Mode	Test Voltage	110V/60Hz

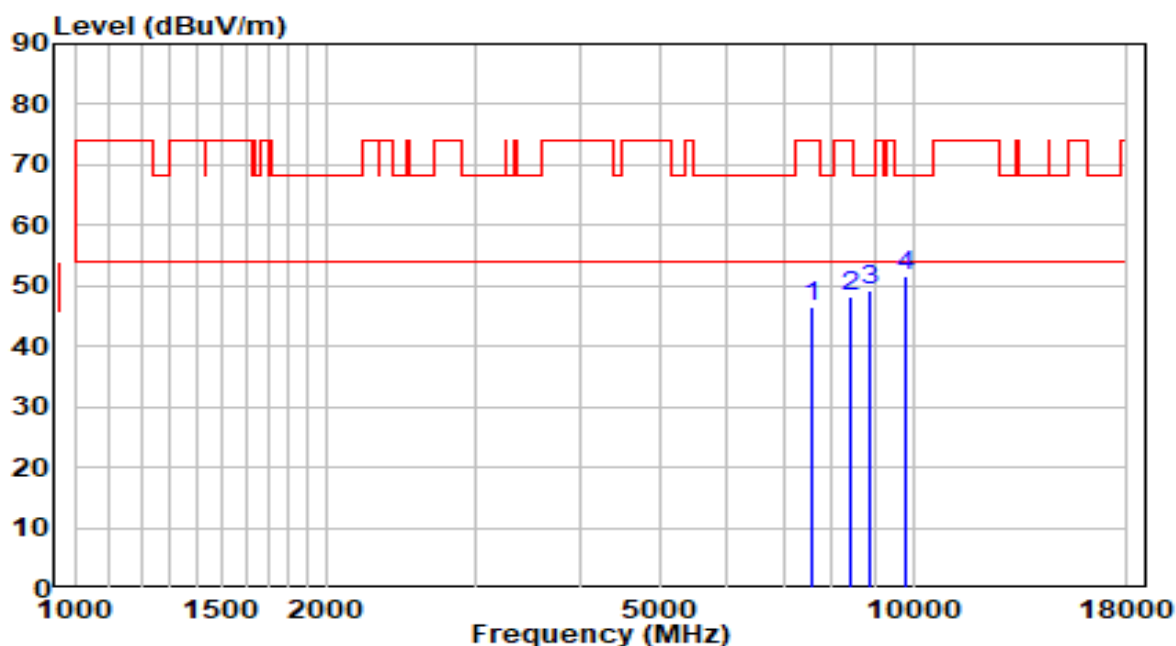


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	34.76	11.80	46.56	-27.44	74.00	Peak
2	8412.000	35.84	12.47	48.31	-25.69	74.00	Peak
3	8862.500	35.85	13.34	49.20	-19.00	68.20	Peak
4	* 9814.500	36.47	15.01	51.48	-16.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	tp-link-AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz - Beamforming Mode	Test Voltage	110V/60Hz

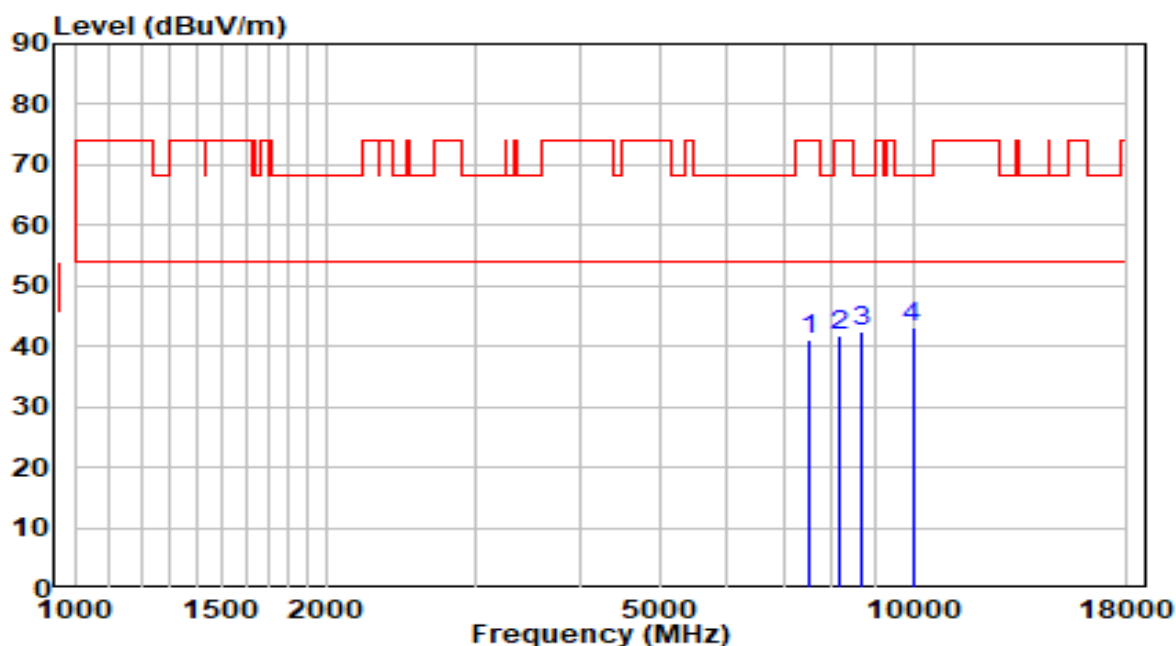


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	29.36	11.72	41.08	-32.92	74.00	Peak
2	8157.000	29.31	12.51	41.81	-32.19	74.00	Peak
3	8667.000	29.65	12.86	42.51	-25.69	68.20	Peak
4	* 9984.500	27.73	15.33	43.06	-25.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	tp-link-AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz - Beamforming Mode	Test Voltage	110V/60Hz

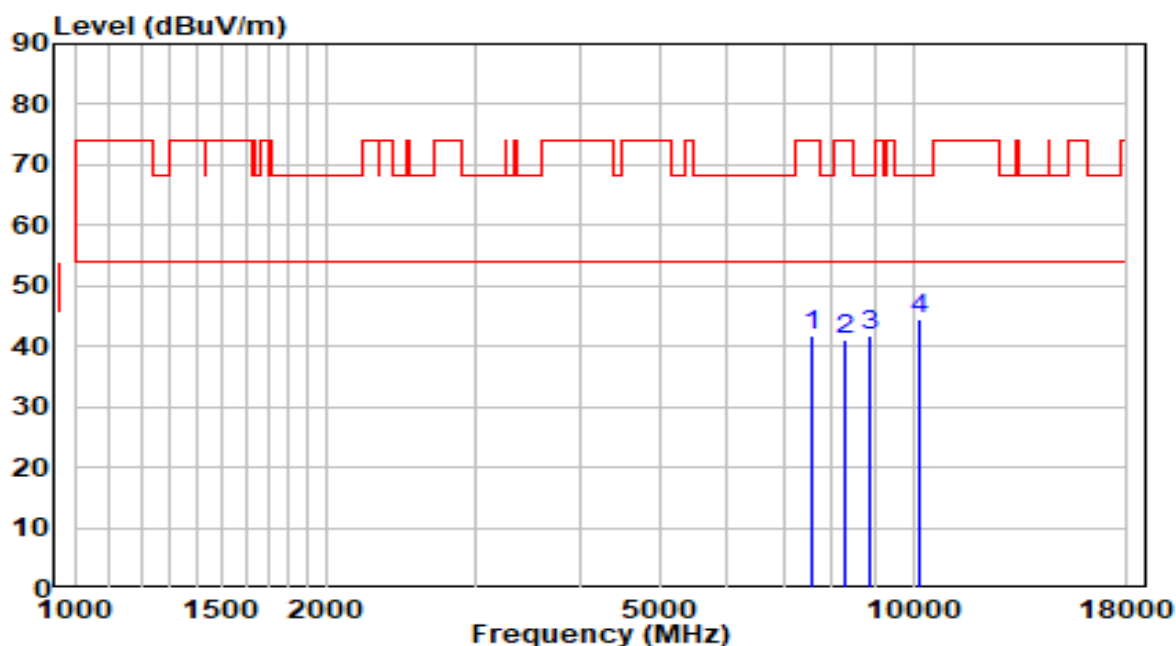


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	29.84	11.87	41.71	-32.29	74.00	Peak
2	8293.000	28.76	12.49	41.25	-32.75	74.00	Peak
3	8879.500	28.25	13.38	41.64	-26.56	68.20	Peak
4	* 10171.500	28.39	15.95	44.34	-23.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz - Beamforming Mode	Test Voltage	110V/60Hz

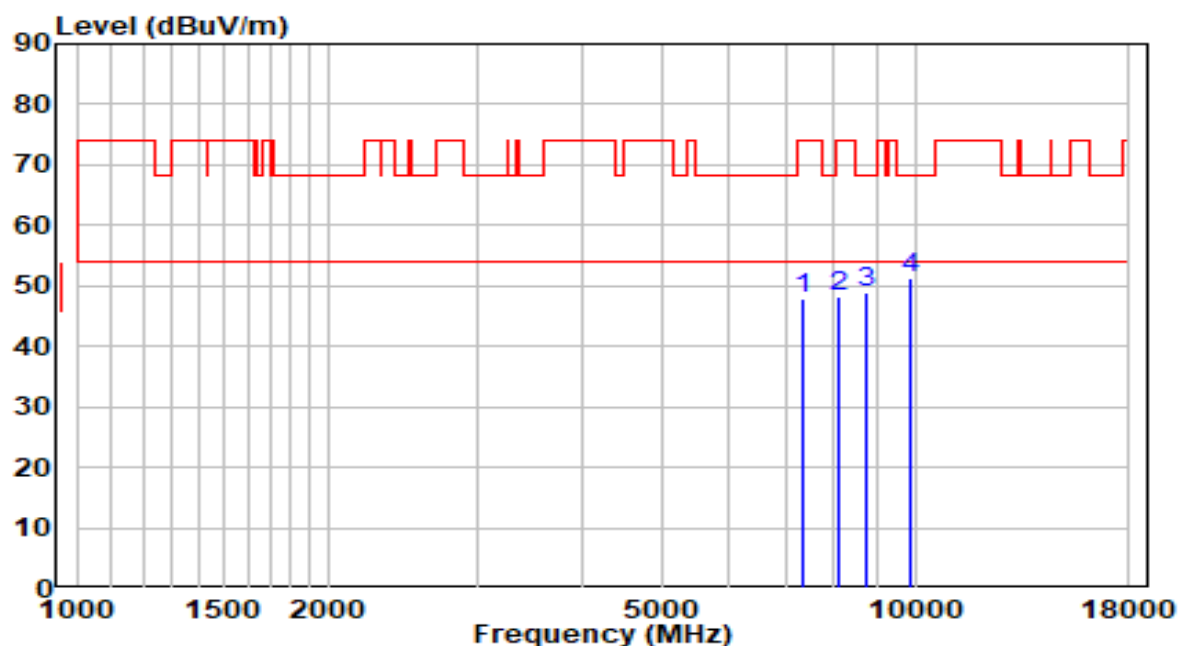


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7349.500	36.53	11.29	47.82	-26.18	74.00	Peak
2	8131.500	35.64	12.51	48.15	-25.85	74.00	Peak
3	8743.500	35.91	13.05	48.97	-19.23	68.20	Peak
4	* 9874.000	36.05	15.12	51.17	-17.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz - Beamforming Mode	Test Voltage	110V/60Hz

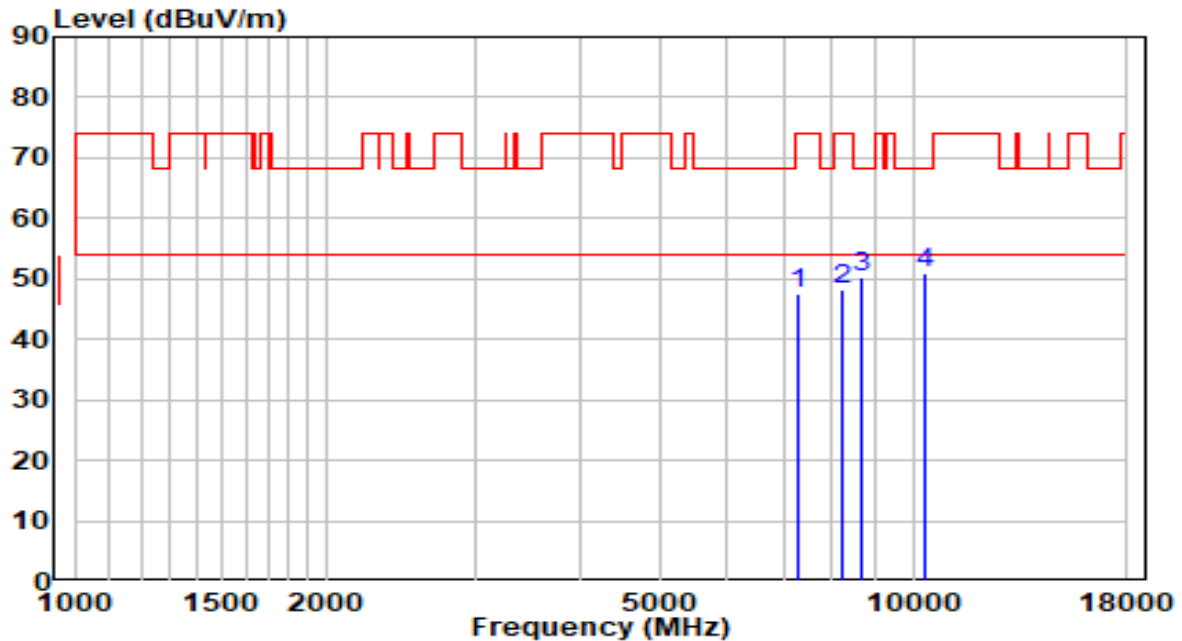


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7298.500	36.35	11.14	47.50	-26.50	74.00	Peak
2	8225.000	35.61	12.50	48.11	-25.89	74.00	Peak
3	8684.000	37.29	12.91	50.20	-18.00	68.20	Peak
4	* 10367.000	34.37	16.62	50.98	-17.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz - Beamforming Mode	Test Voltage	110V/60Hz

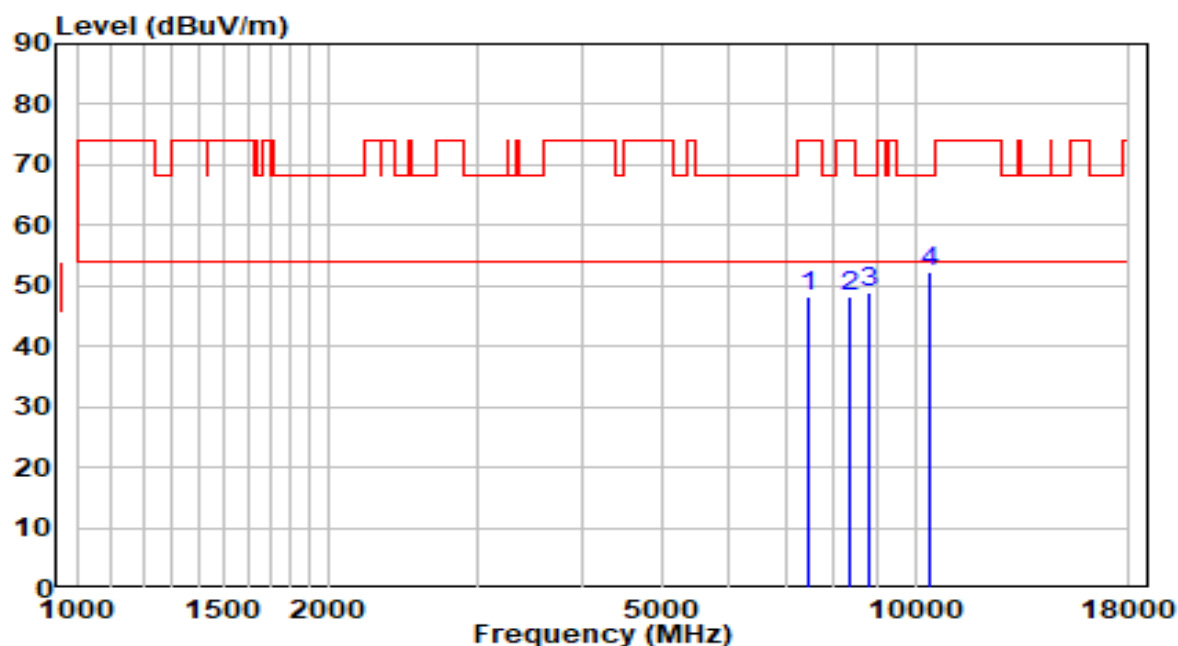


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	36.55	11.55	48.11	-25.89	74.00	Peak
2	8352.500	35.82	12.48	48.30	-25.70	74.00	Peak
3	8837.000	35.59	13.28	48.87	-19.33	68.20	Peak
4	* 10443.500	35.37	16.88	52.25	-15.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz - Beamforming Mode	Test Voltage	110V/60Hz

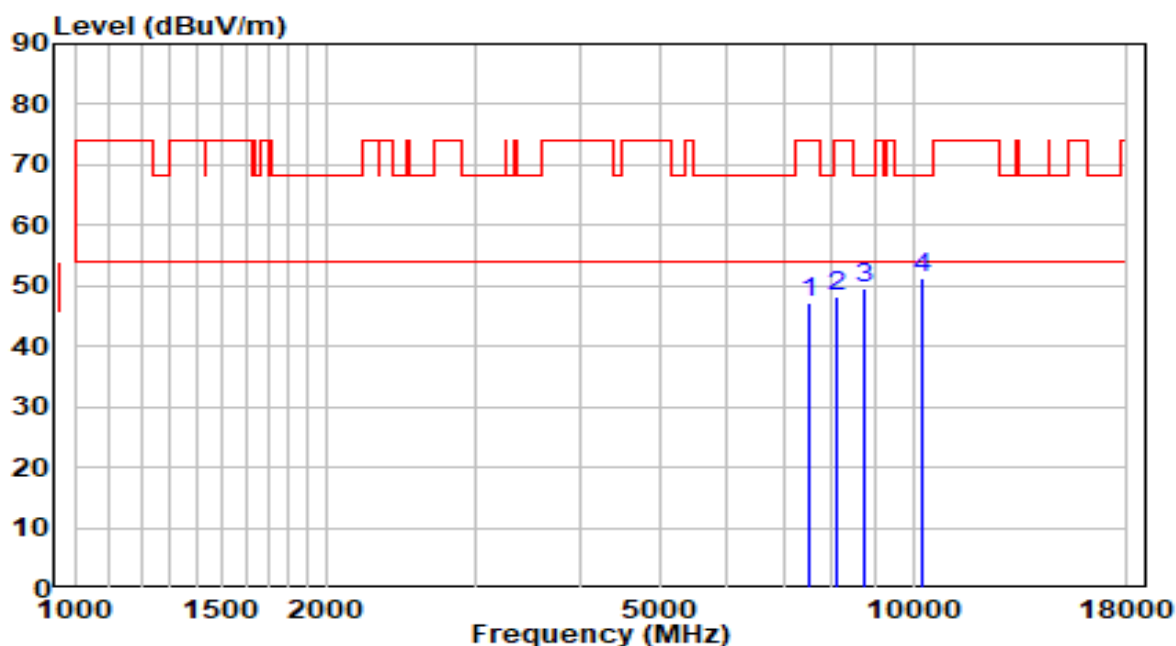


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7494.000	35.61	11.70	47.31	-26.69	74.00	Peak
2	8106.000	35.60	12.51	48.11	-25.89	74.00	Peak
3	8726.500	36.43	13.01	49.44	-18.76	68.20	Peak
4	* 10248.000	35.03	16.21	51.24	-16.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz - Beamforming Mode	Test Voltage	110V/60Hz

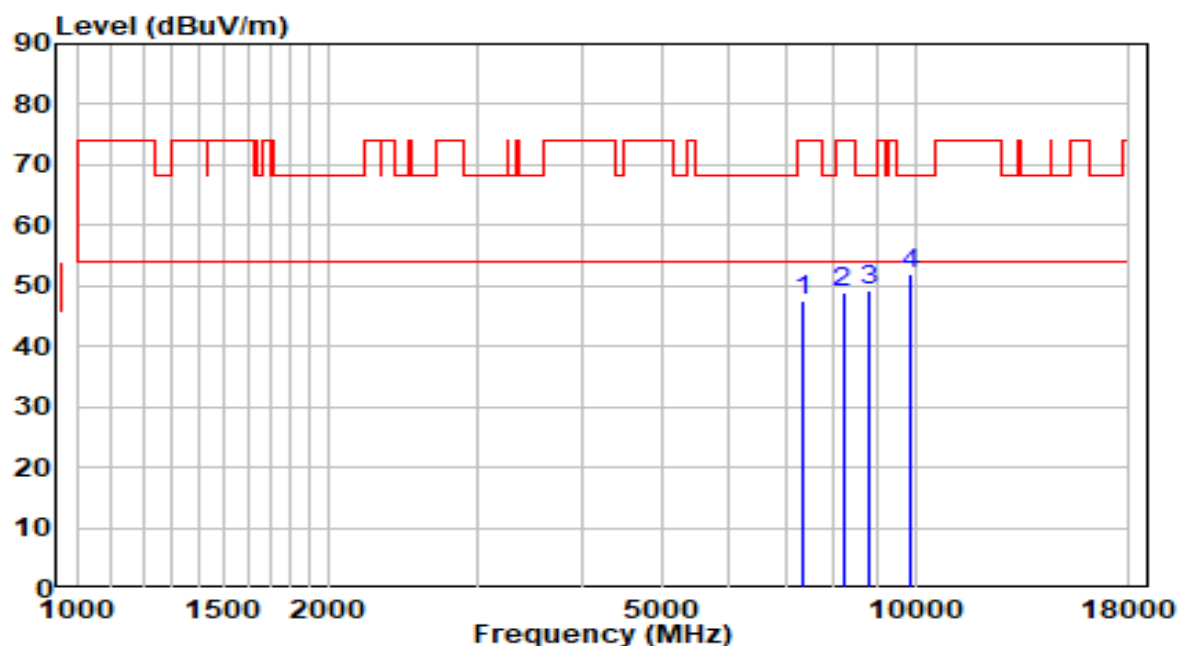


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7366.500	36.07	11.34	47.41	-26.59	74.00	Peak
2	8199.500	36.56	12.50	49.06	-24.94	74.00	Peak
3	8837.000	36.12	13.28	49.40	-18.80	68.20	Peak
4	* 9882.500	36.86	15.14	52.00	-16.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz - Beamforming Mode	Test Voltage	110V/60Hz

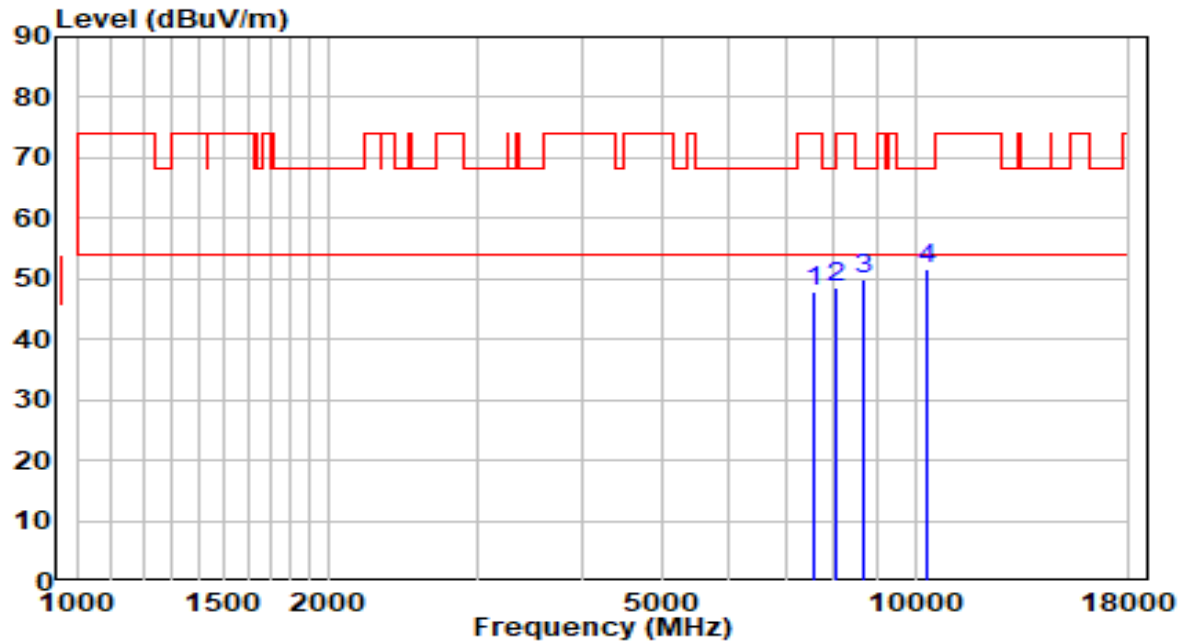


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	36.00	11.83	47.83	-26.17	74.00	Peak
2	8055.000	36.00	12.52	48.53	-25.47	74.00	Peak
3	8650.000	36.95	12.82	49.78	-18.42	68.20	Peak
4	* 10367.000	35.04	16.62	51.66	-16.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

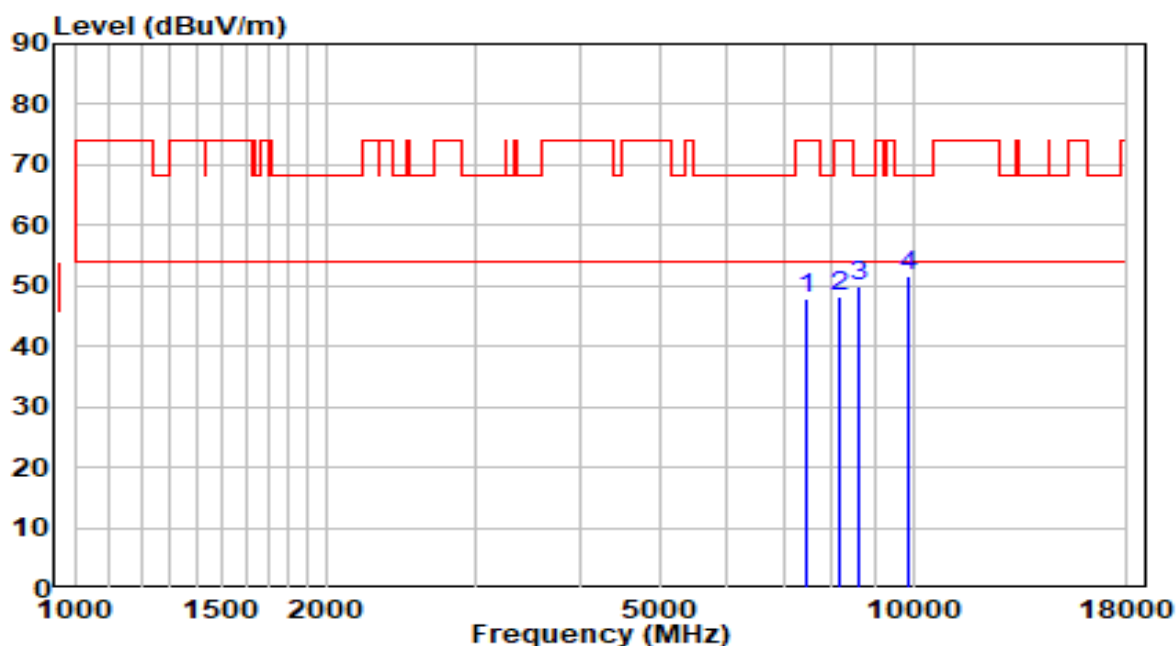


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7451.500	36.29	11.58	47.87	-26.13	74.00	Peak
2	8174.000	35.66	12.50	48.17	-25.83	74.00	Peak
3	8633.000	37.07	12.78	49.85	-18.35	68.20	Peak
4	* 9865.500	36.67	15.11	51.78	-16.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

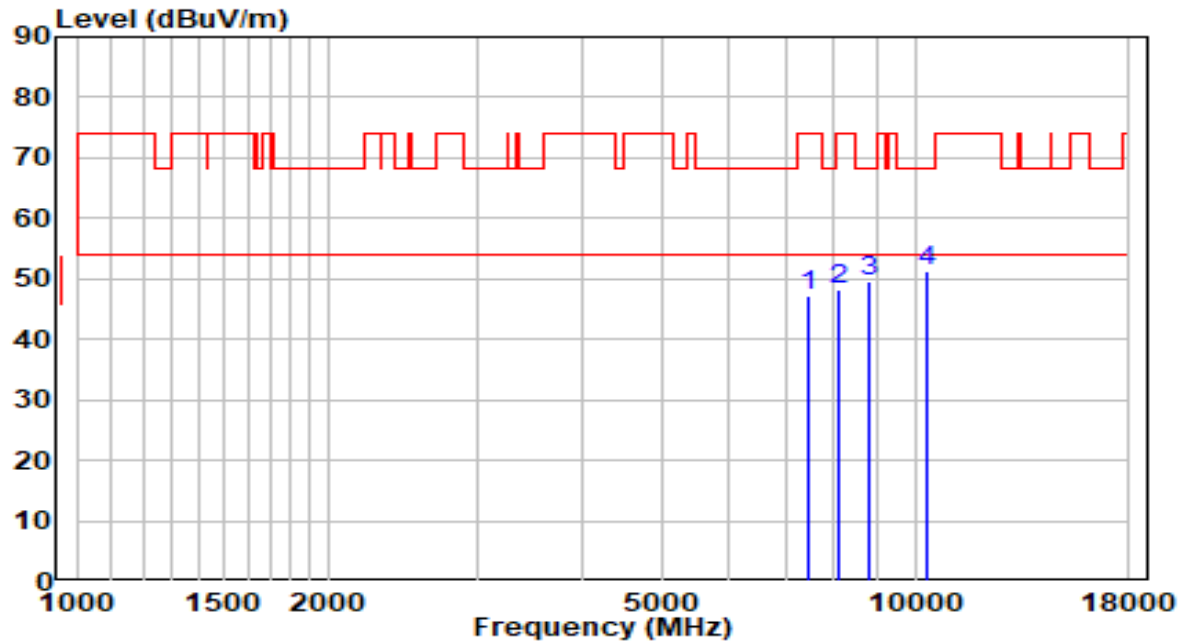


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	35.76	11.55	47.31	-26.69	74.00	Peak
2	8080.500	35.74	12.52	48.25	-25.75	74.00	Peak
3	8786.000	36.42	13.16	49.57	-18.63	68.20	Peak
4	* 10350.000	34.78	16.56	51.34	-16.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz - Beamforming Mode	Test Voltage	110V/60Hz

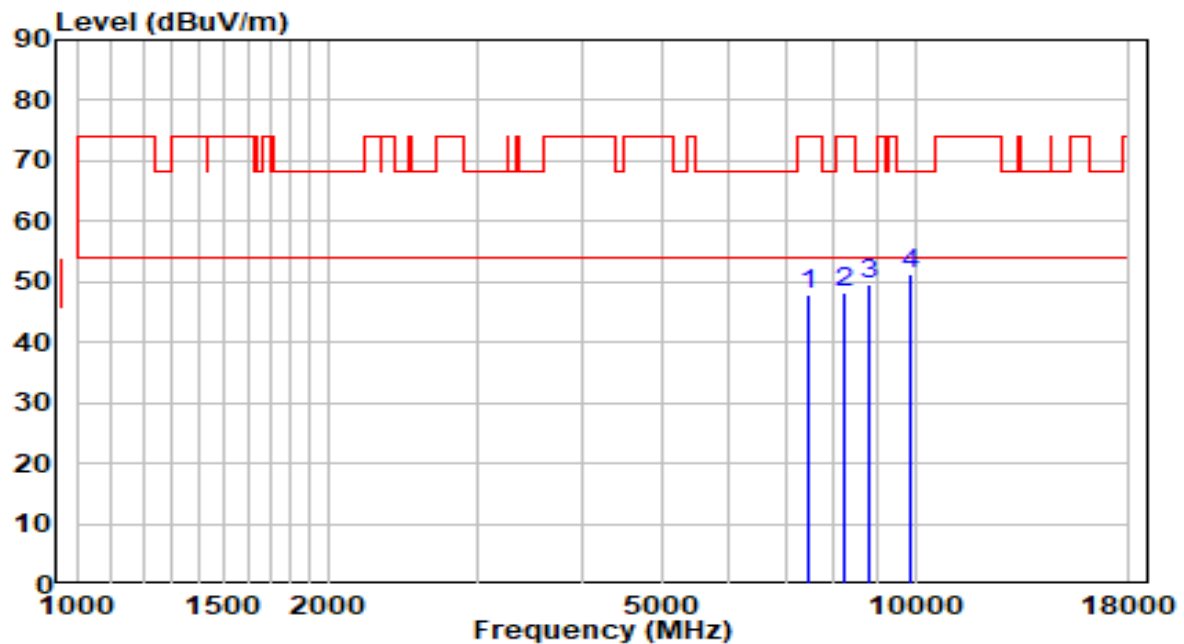


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	36.44	11.55	48.00	-26.00	74.00	Peak
2	8216.500	35.60	12.50	48.09	-25.91	74.00	Peak
3	8837.000	36.44	13.28	49.72	-18.48	68.20	Peak
4	* 9874.000	36.19	15.12	51.31	-16.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz - Beamforming Mode	Test Voltage	110V/60Hz

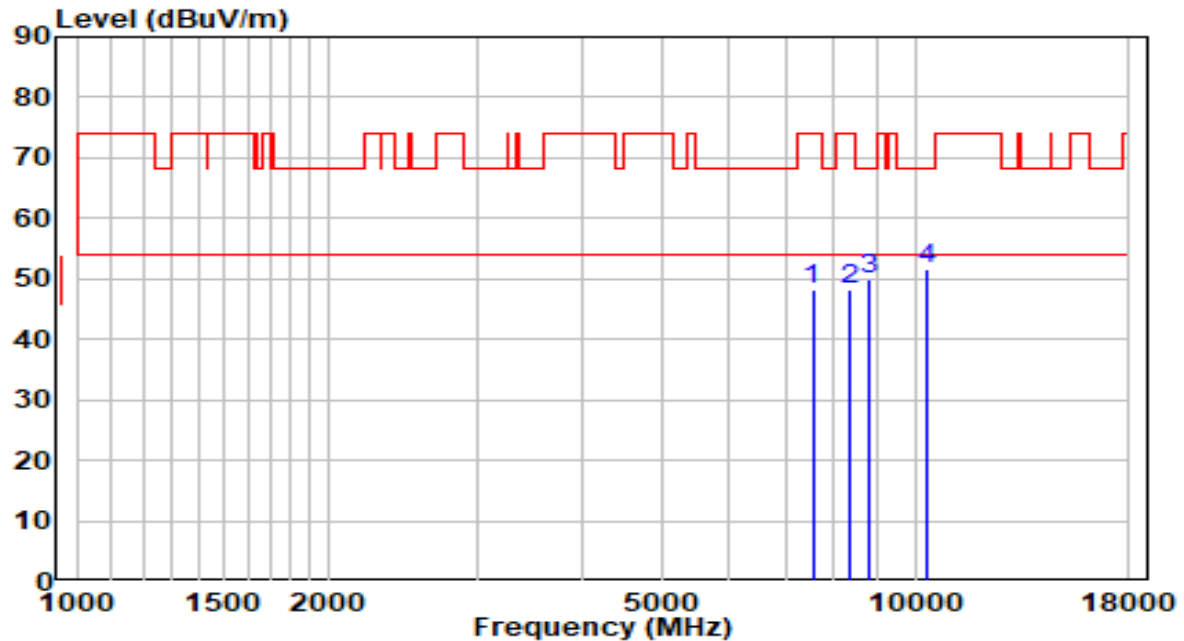


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	36.61	11.79	48.39	-25.61	74.00	Peak
2	8352.500	35.69	12.48	48.16	-25.84	74.00	Peak
3	8811.500	36.55	13.22	49.77	-18.43	68.20	Peak
4	* 10367.000	35.10	16.62	51.71	-16.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz - Beamforming Mode	Test Voltage	110V/60Hz

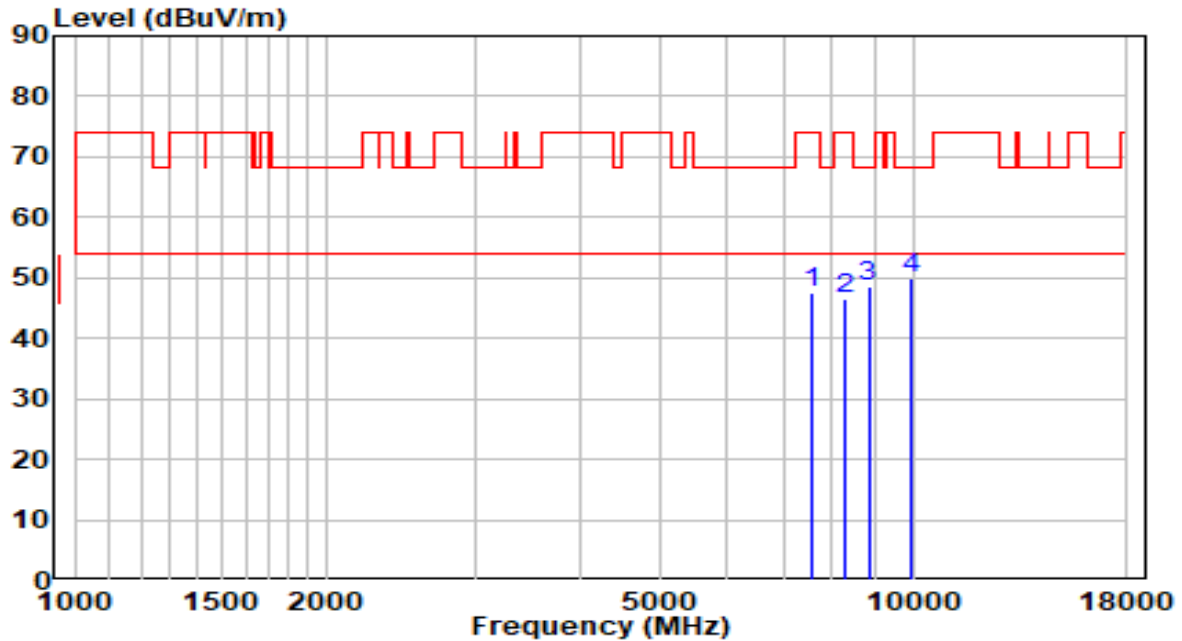


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	35.62	11.80	47.42	-26.58	74.00	Peak
2	8276.000	34.19	12.49	46.68	-27.32	74.00	Peak
3	8845.500	35.29	13.30	48.60	-19.60	68.20	Peak
4	* 9916.500	34.80	15.20	50.00	-18.20	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz - Beamforming Mode	Test Voltage	110V/60Hz

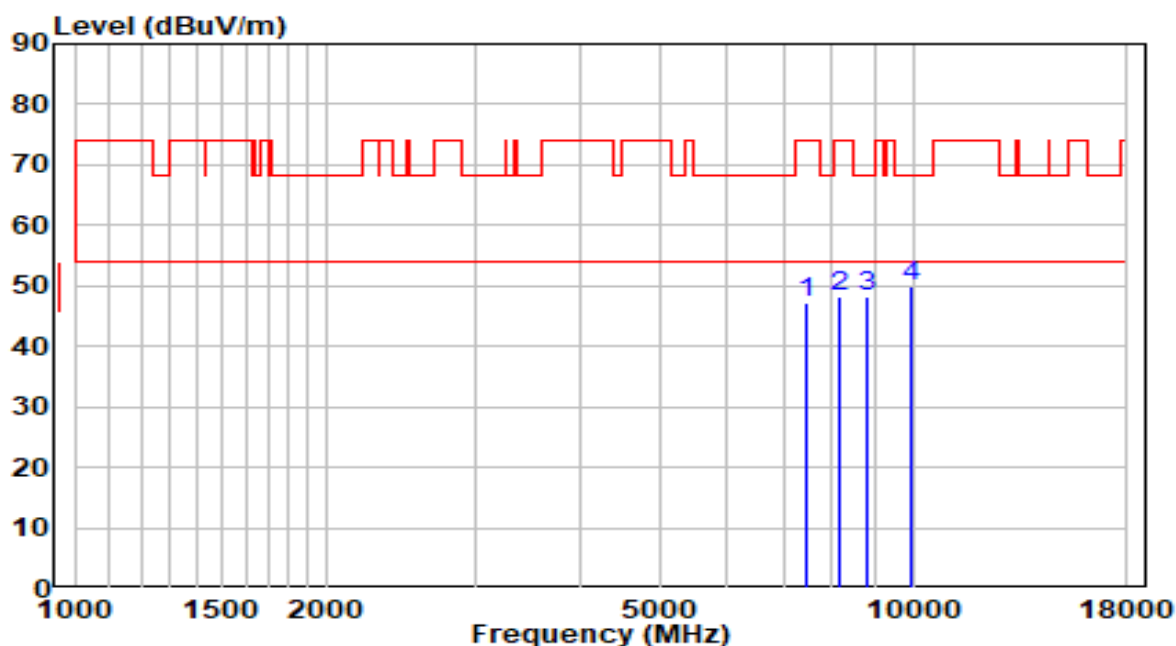


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	35.77	11.55	47.32	-26.68	74.00	Peak
2	8157.000	35.87	12.51	48.37	-25.63	74.00	Peak
3	8828.500	34.96	13.26	48.22	-19.98	68.20	Peak
4	* 9959.000	34.70	15.28	49.98	-18.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz - Beamforming Mode	Test Voltage	110V/60Hz

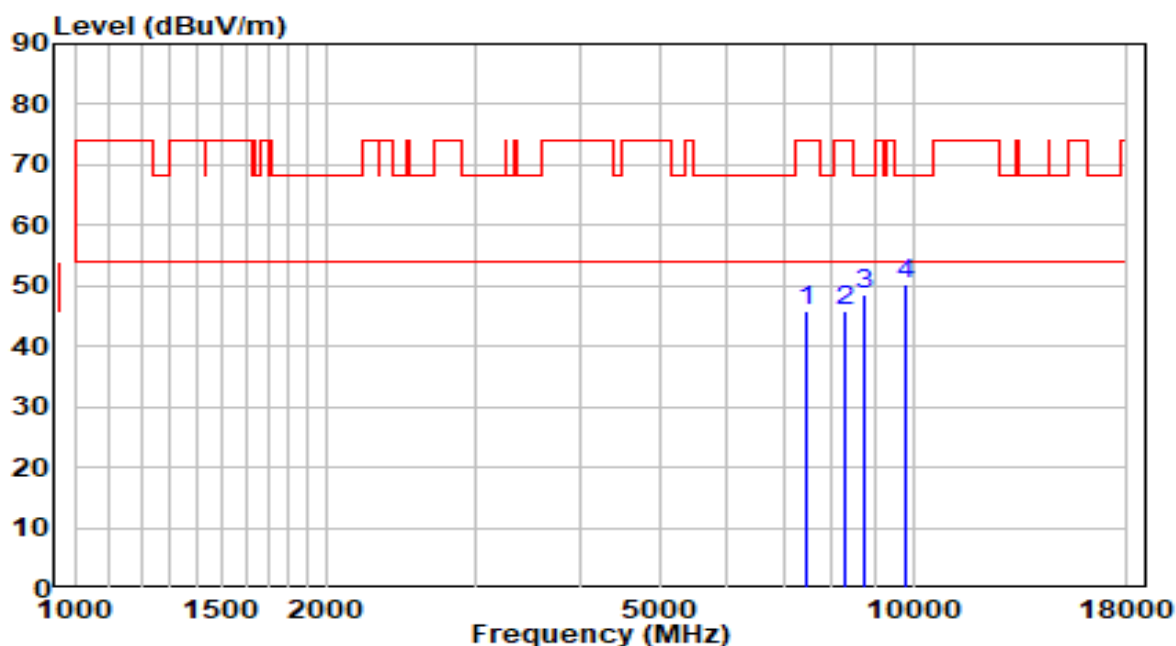


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	34.22	11.67	45.89	-28.11	74.00	Peak
2	8310.000	33.50	12.48	45.99	-28.01	74.00	Peak
3	8735.000	35.40	13.03	48.43	-19.77	68.20	Peak
4	* 9814.500	35.35	15.01	50.36	-17.84	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz - Beamforming Mode	Test Voltage	110V/60Hz

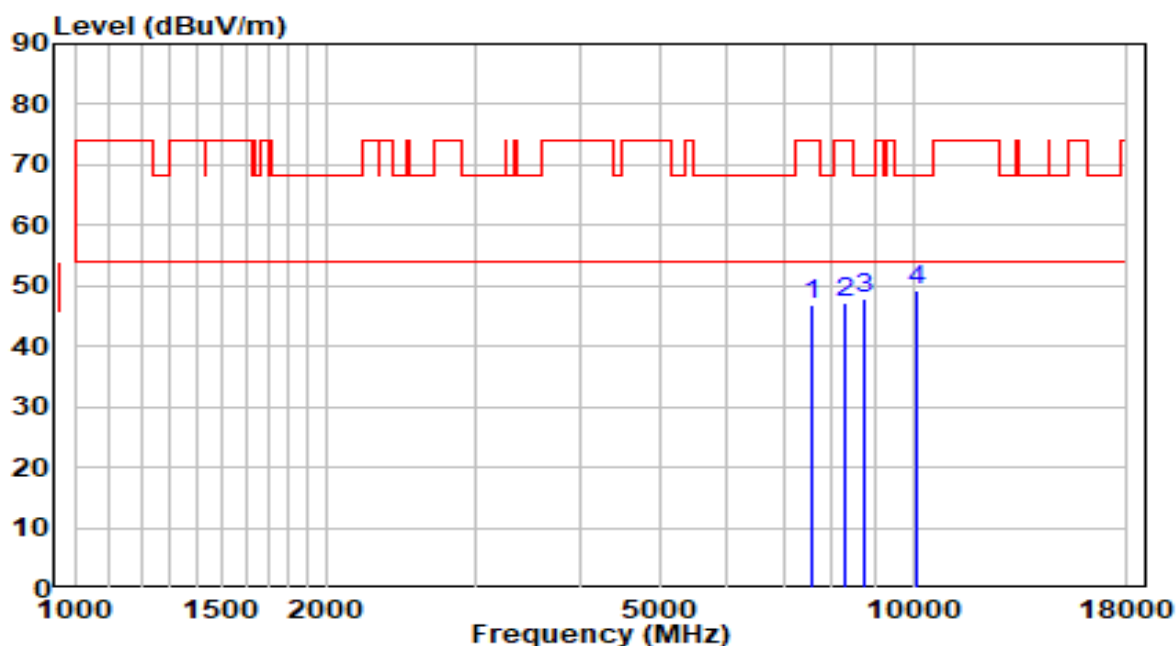


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	35.03	11.80	46.83	-27.17	74.00	Peak
2	8310.000	34.67	12.48	47.15	-26.85	74.00	Peak
3	8718.000	35.02	12.99	48.01	-20.19	68.20	Peak
4	* 10069.500	33.57	15.60	49.17	-19.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz - Beamforming Mode	Test Voltage	110V/60Hz

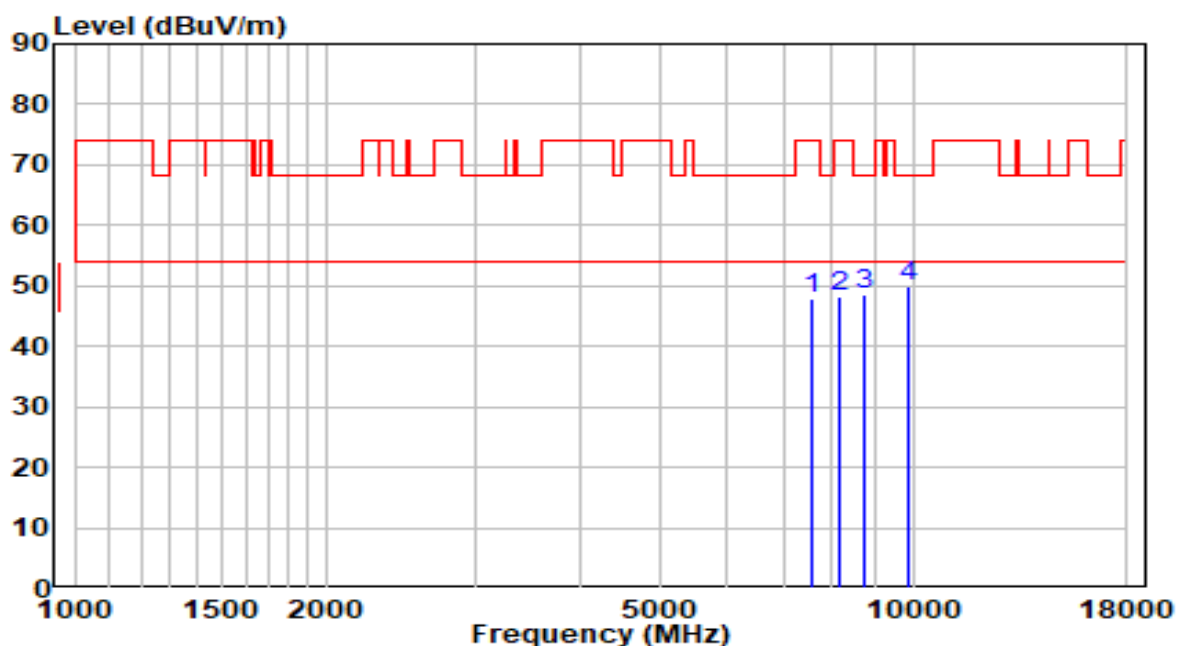


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	36.03	11.83	47.86	-26.14	74.00	Peak
2	8157.000	35.74	12.51	48.24	-25.76	74.00	Peak
3	8718.000	35.59	12.99	48.58	-19.62	68.20	Peak
4	* 9899.500	34.88	15.17	50.05	-18.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz - Beamforming Mode	Test Voltage	110V/60Hz

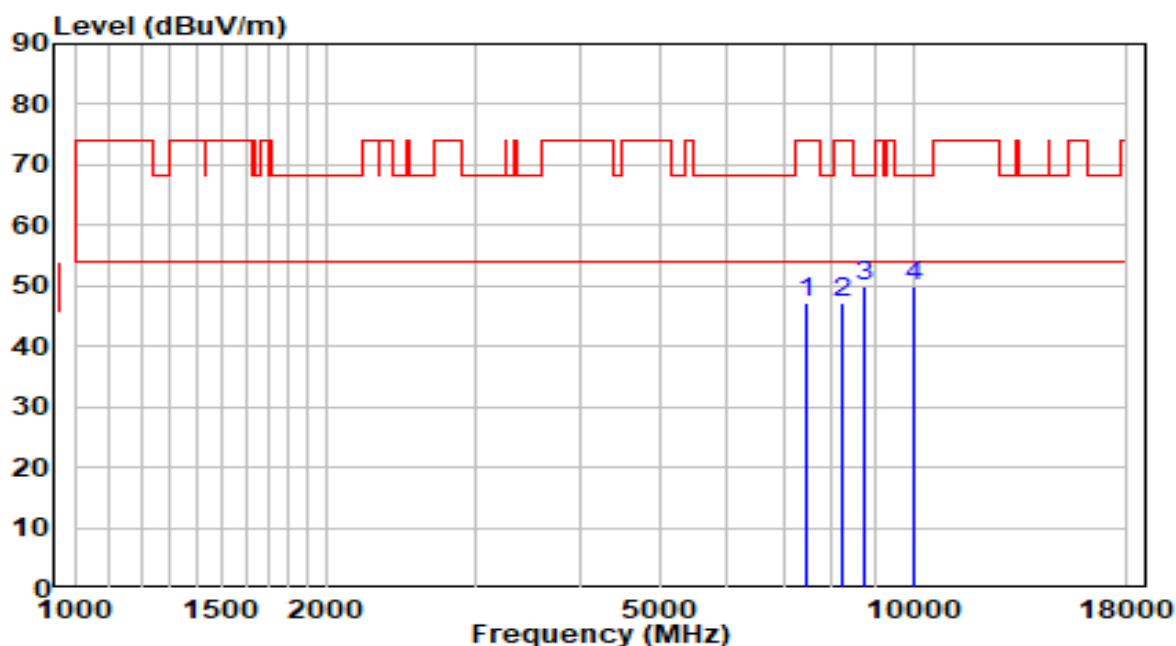


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	35.49	11.65	47.14	-26.86	74.00	Peak
2	8242.000	34.88	12.49	47.38	-26.62	74.00	Peak
3	8735.000	36.74	13.03	49.77	-18.43	68.20	Peak
4	* 10001.500	34.60	15.37	49.97	-18.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz - Beamforming Mode	Test Voltage	110V/60Hz

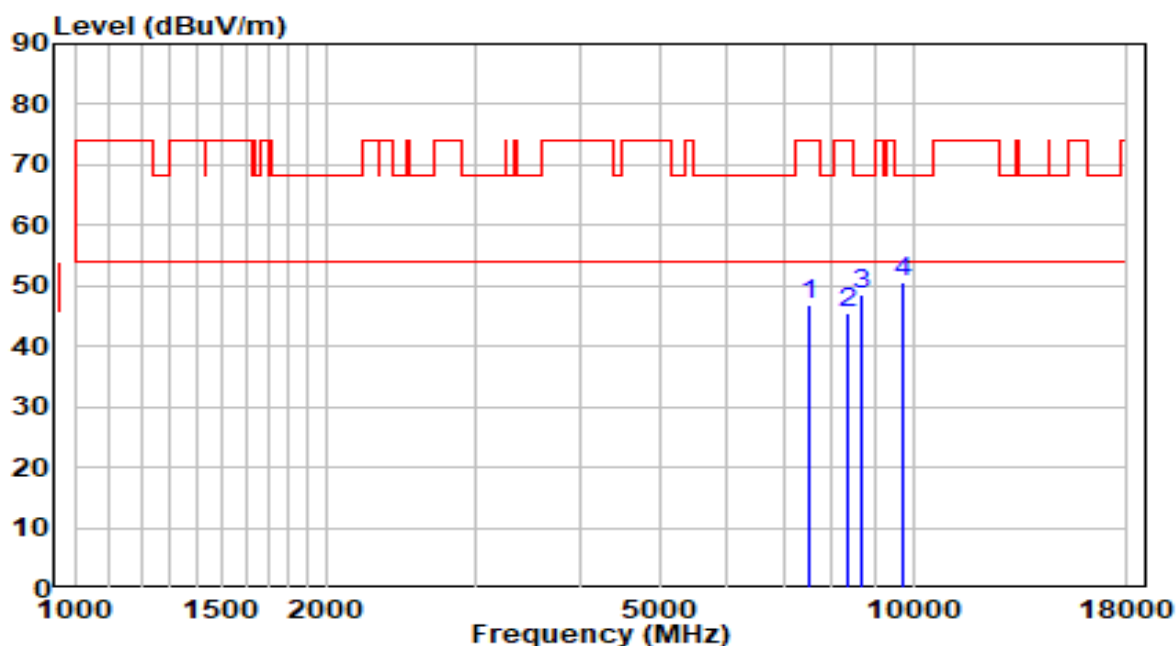


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	35.21	11.72	46.93	-27.07	74.00	Peak
2	8361.000	33.02	12.48	45.49	-28.51	74.00	Peak
3	8684.000	35.52	12.91	48.43	-19.77	68.20	Peak
4	* 9755.000	35.81	14.90	50.71	-17.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz - Beamforming Mode	Test Voltage	110V/60Hz

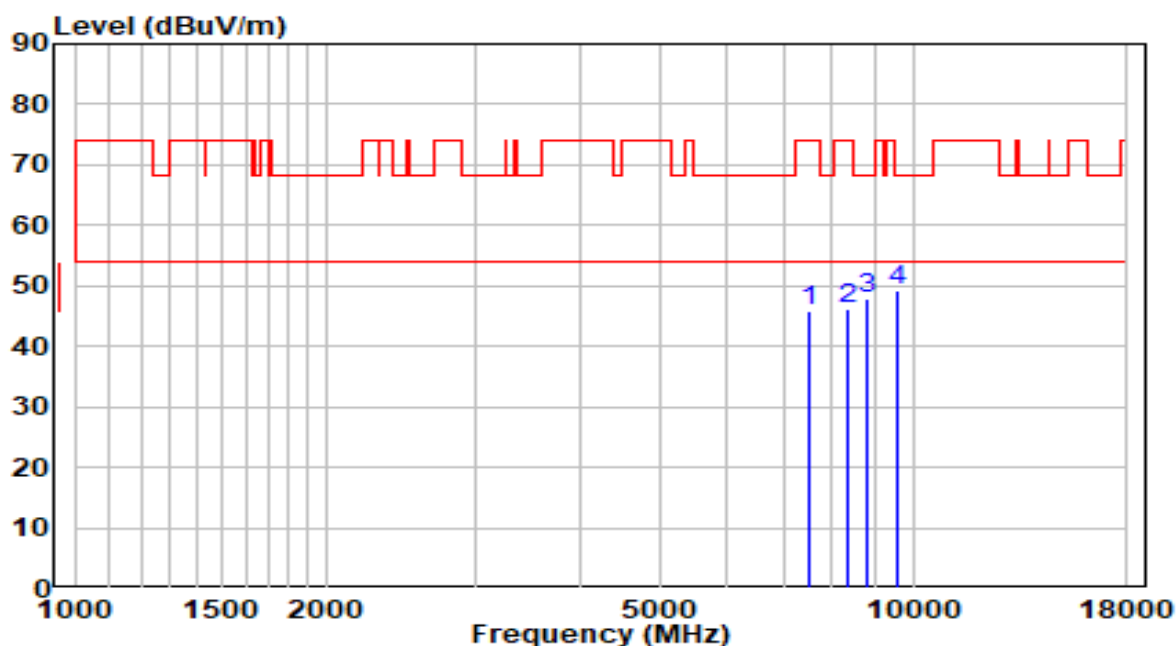


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	34.18	11.77	45.96	-28.04	74.00	Peak
2	8344.000	33.57	12.48	46.05	-27.95	74.00	Peak
3	8828.500	34.73	13.26	47.99	-20.21	68.20	Peak
4	* 9610.500	34.76	14.63	49.39	-18.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz - Beamforming Mode	Test Voltage	110V/60Hz

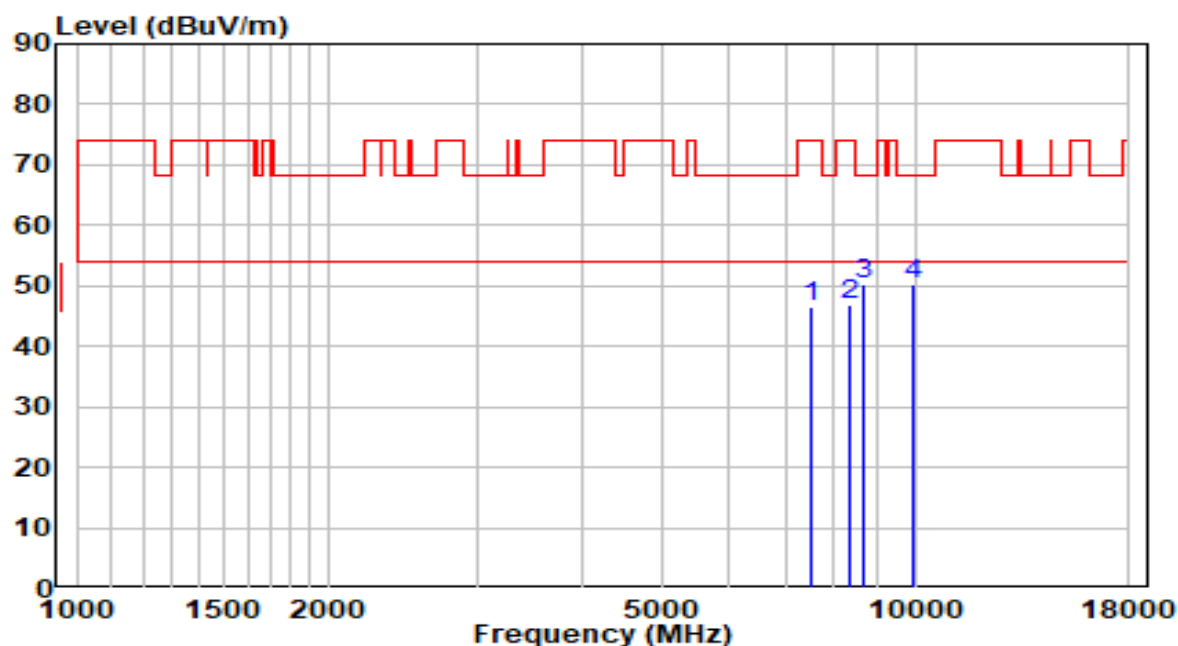


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	34.83	11.77	46.61	-27.39	74.00	Peak
2	8344.000	34.33	12.48	46.81	-27.19	74.00	Peak
3	* 8684.000	37.49	12.91	50.40	-17.80	68.20	Peak
4	9916.500	34.93	15.20	50.13	-18.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz - Beamforming Mode	Test Voltage	110V/60Hz

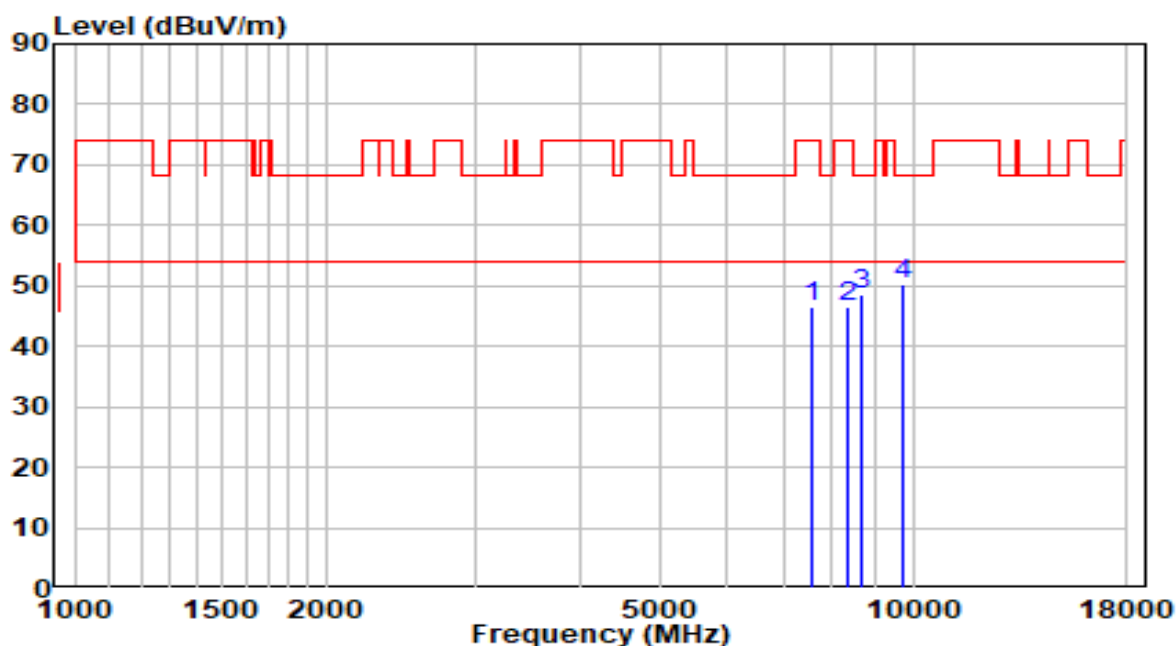


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	34.60	11.80	46.40	-27.60	74.00	Peak
2	8361.000	34.13	12.48	46.61	-27.39	74.00	Peak
3	8684.000	35.76	12.91	48.67	-19.53	68.20	Peak
4	* 9712.500	35.36	14.82	50.18	-18.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz - Beamforming Mode	Test Voltage	110V/60Hz

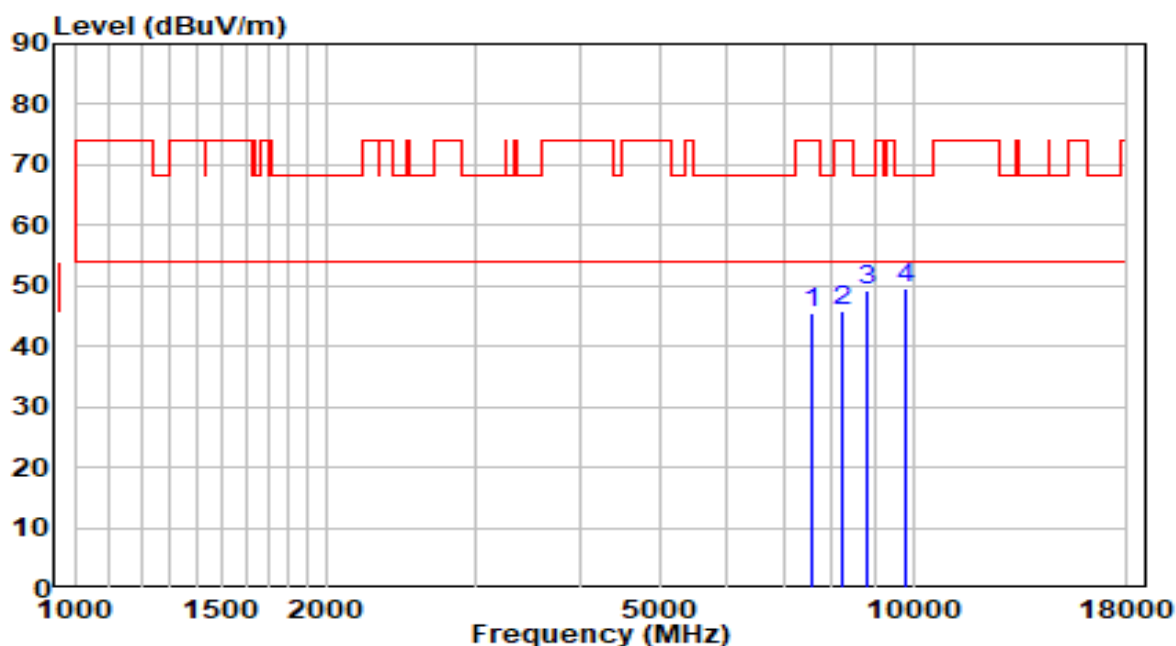


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	33.84	11.80	45.65	-28.35	74.00	Peak
2	8242.000	33.24	12.49	45.74	-28.26	74.00	Peak
3	8794.500	36.05	13.18	49.23	-18.97	68.20	Peak
4	* 9797.500	34.63	14.98	49.61	-18.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	25.0°C/46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz - Beamforming Mode	Test Voltage	110V/60Hz

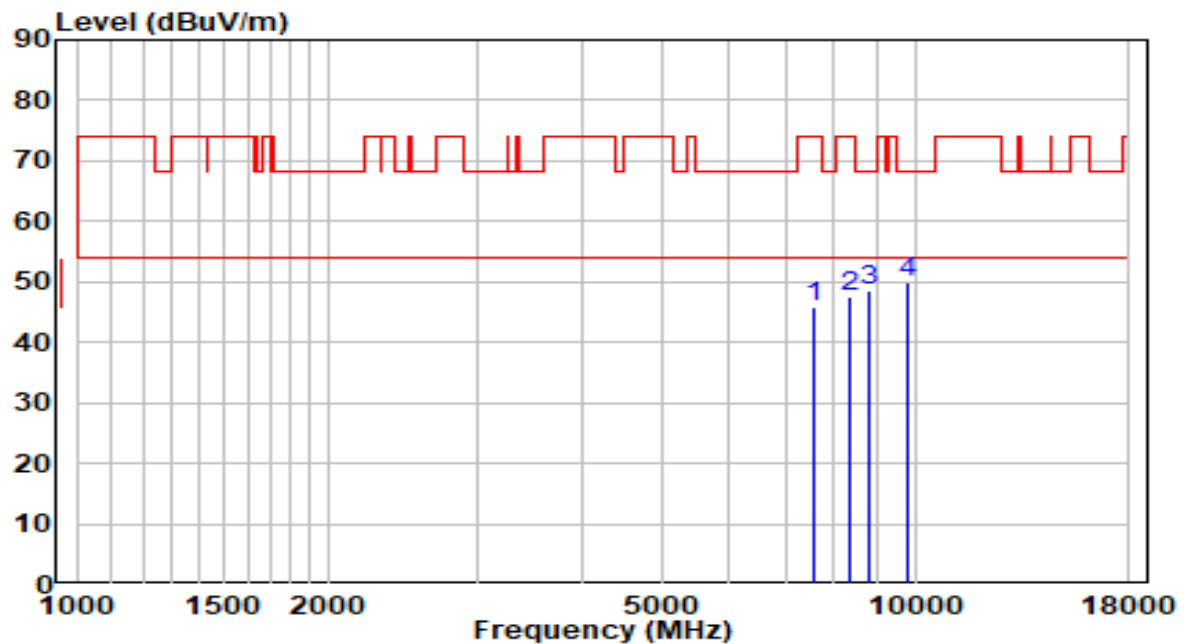


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	34.04	11.80	45.84	-28.16	74.00	Peak
2	8327.000	35.15	12.48	47.63	-26.37	74.00	Peak
3	8811.500	35.19	13.22	48.41	-19.79	68.20	Peak
4	* 9814.500	34.87	15.01	49.88	-18.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz - Beamforming Mode	Test Voltage	110V/60Hz

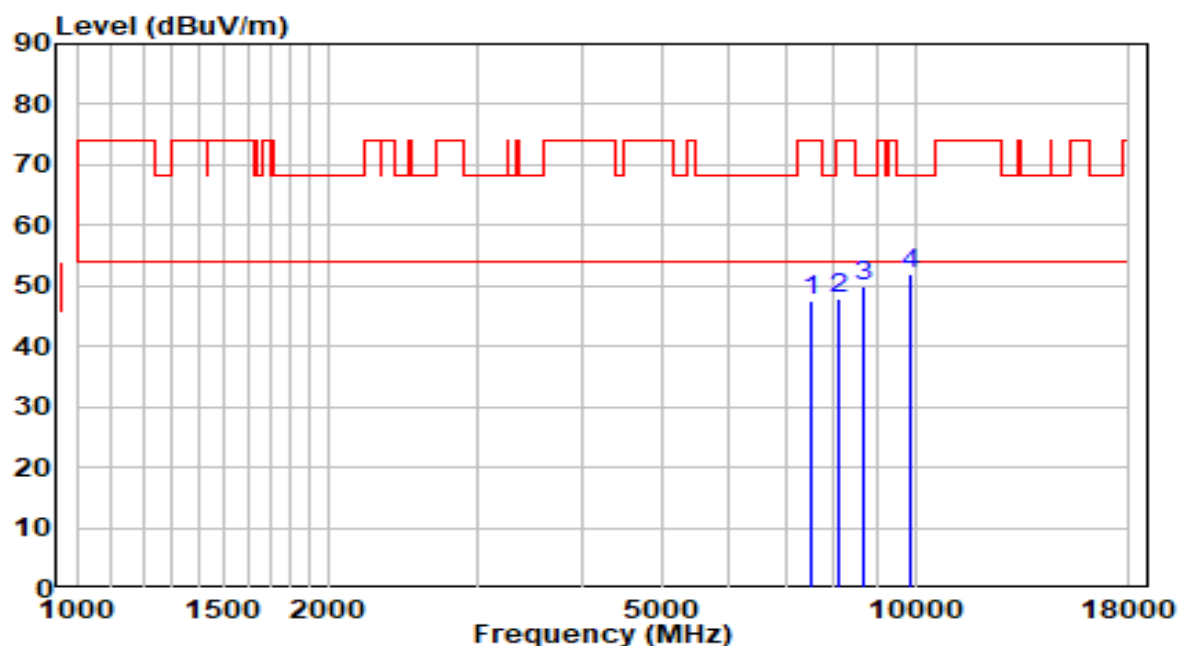


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	35.90	11.72	47.62	-26.38	74.00	Peak
2	8131.500	35.52	12.51	48.04	-25.96	74.00	Peak
3	8658.500	36.99	12.84	49.84	-18.36	68.20	Peak
4	* 9865.500	36.97	15.11	52.08	-16.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz - Beamforming Mode	Test Voltage	110V/60Hz

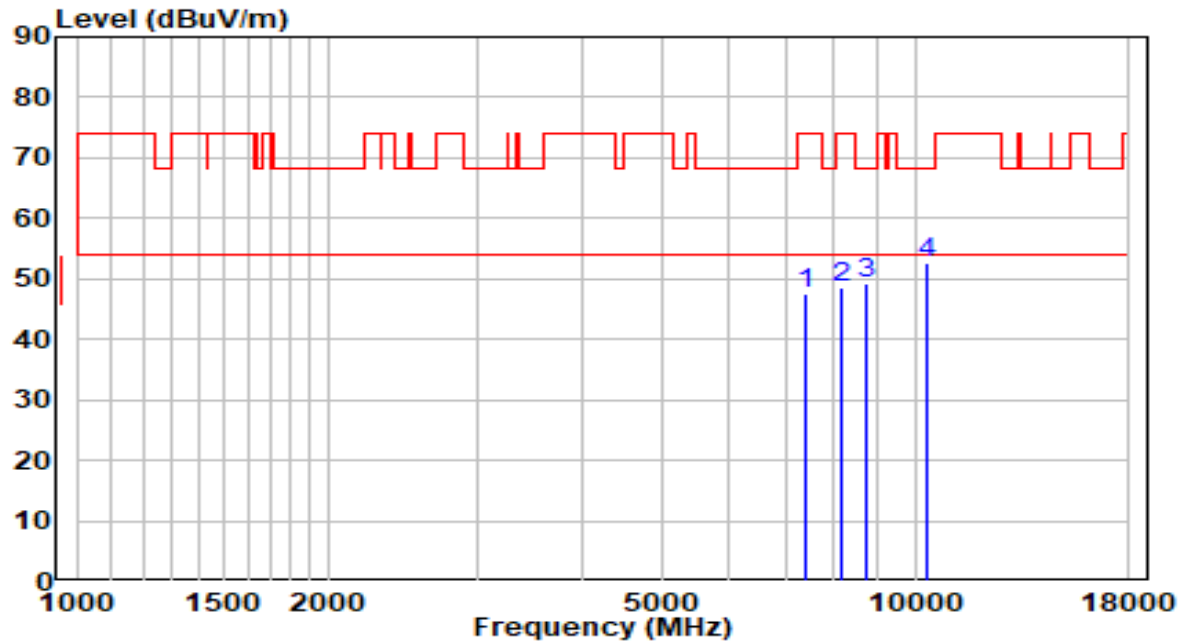


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7417.500	36.01	11.48	47.50	-26.50	74.00	Peak
2	8174.000	35.90	12.50	48.41	-25.59	74.00	Peak
3	8726.500	36.07	13.01	49.08	-19.12	68.20	Peak
4	* 10367.000	35.93	16.62	52.55	-15.65	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz - Beamforming Mode	Test Voltage	110V/60Hz

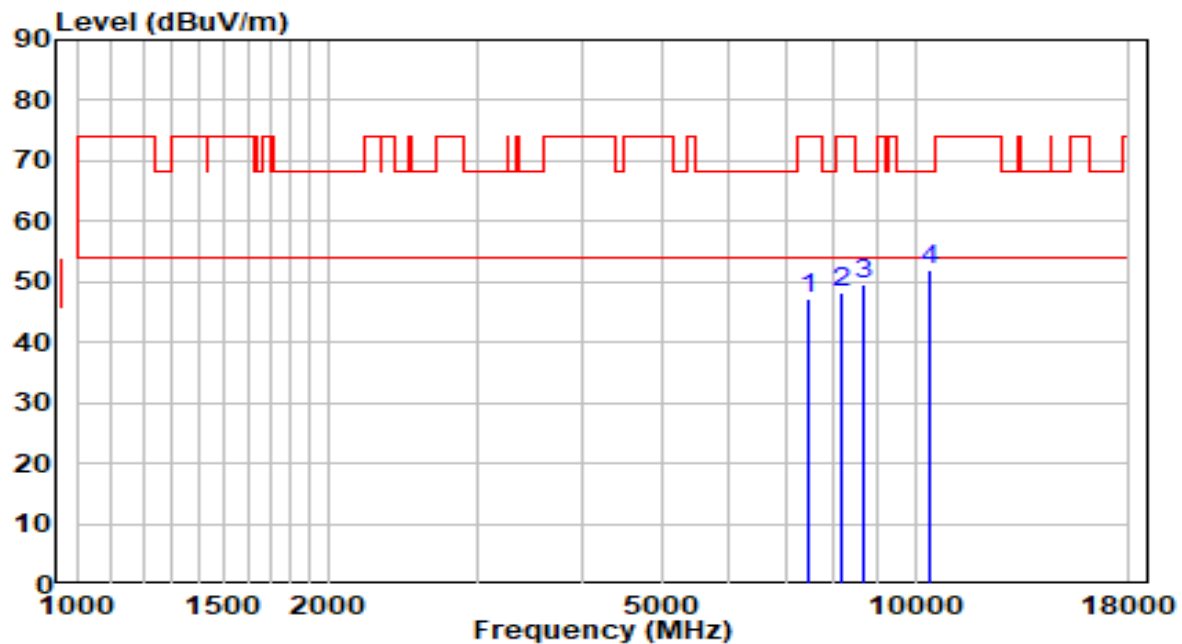


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	35.68	11.55	47.23	-26.77	74.00	Peak
2	8157.000	35.81	12.51	48.32	-25.68	74.00	Peak
3	8650.000	36.68	12.82	49.50	-18.70	68.20	Peak
4	* 10435.000	35.13	16.85	51.98	-16.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz - Beamforming Mode	Test Voltage	110V/60Hz

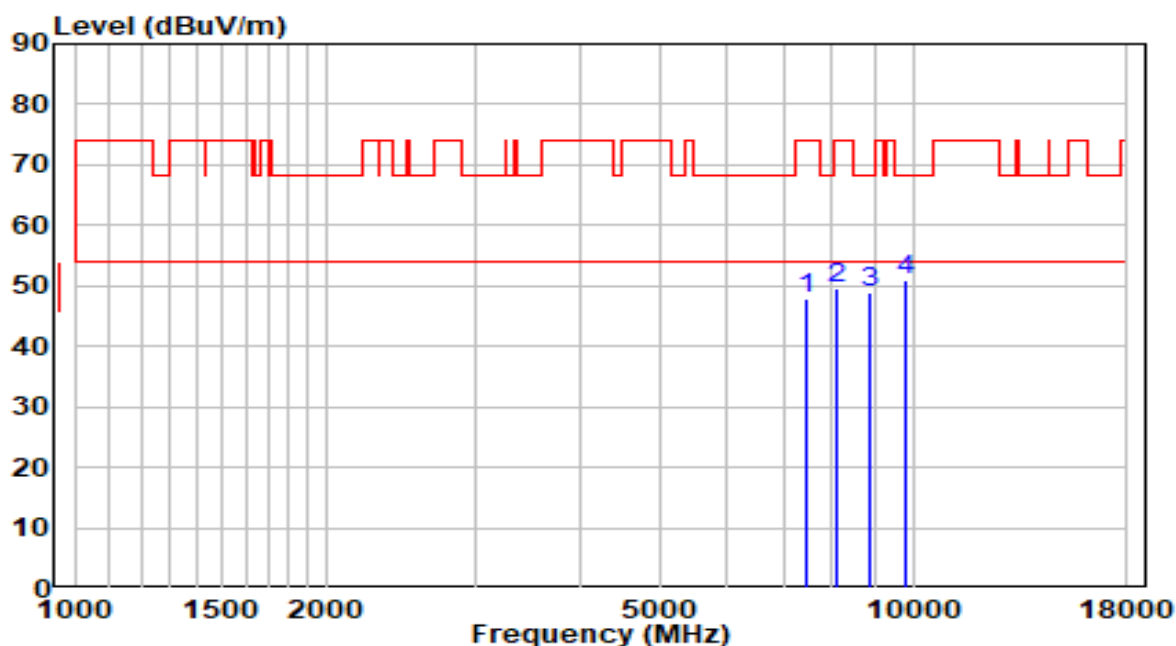


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	36.12	11.65	47.77	-26.23	74.00	Peak
2	8097.500	37.14	12.52	49.66	-24.34	74.00	Peak
3	8896.500	35.64	13.43	49.07	-19.13	68.20	Peak
4	* 9763.500	35.86	14.92	50.78	-17.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

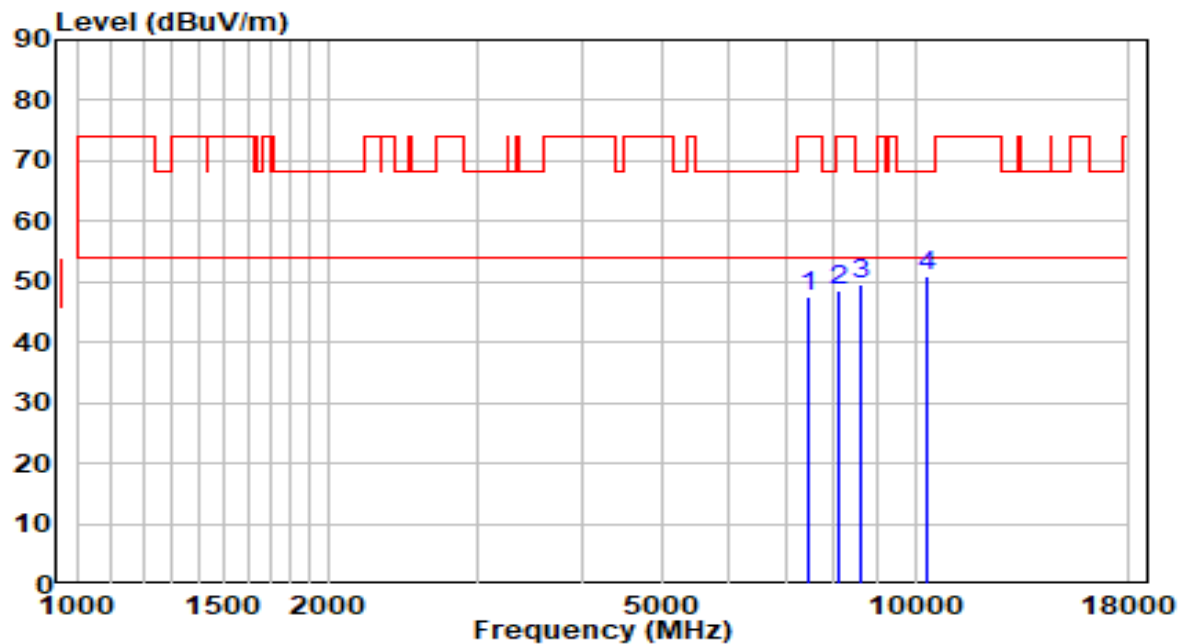


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	35.93	11.60	47.53	-26.47	74.00	Peak
2	8106.000	36.01	12.51	48.52	-25.48	74.00	Peak
3	8641.500	36.95	12.80	49.75	-18.45	68.20	Peak
4	* 10367.000	34.45	16.62	51.06	-17.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/57.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

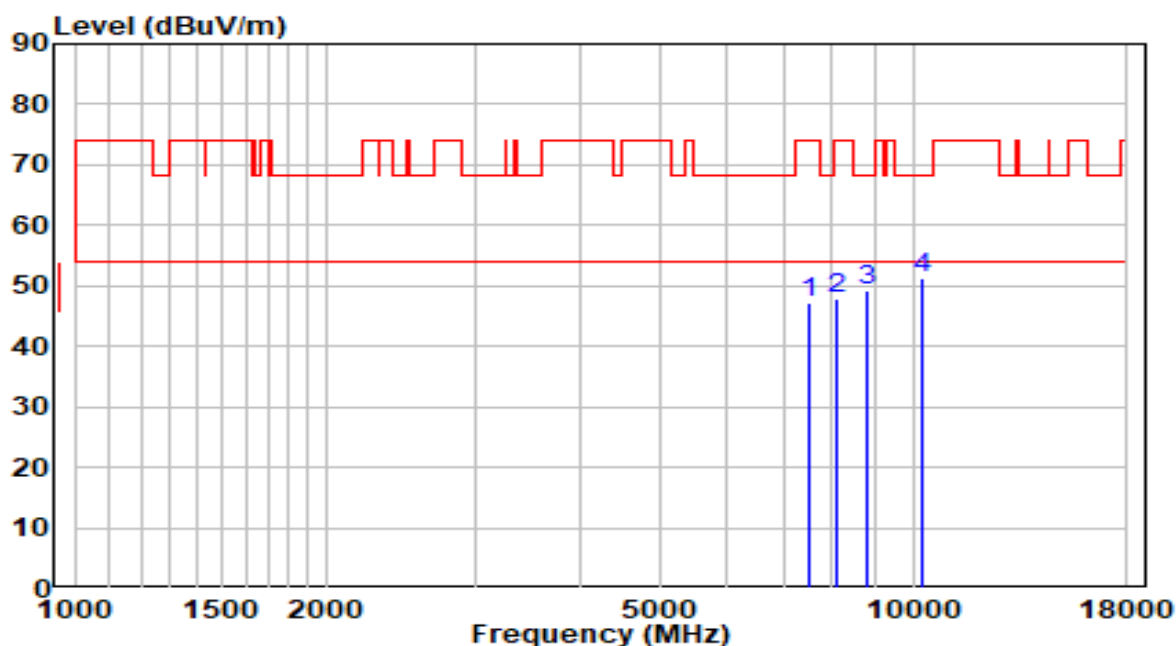

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	35.45	11.77	47.23	-26.77	74.00	Peak
2	8106.000	35.44	12.51	47.96	-26.04	74.00	Peak
3	8820.000	35.92	13.24	49.16	-19.04	68.20	Peak
4	* 10282.000	34.92	16.32	51.25	-16.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.