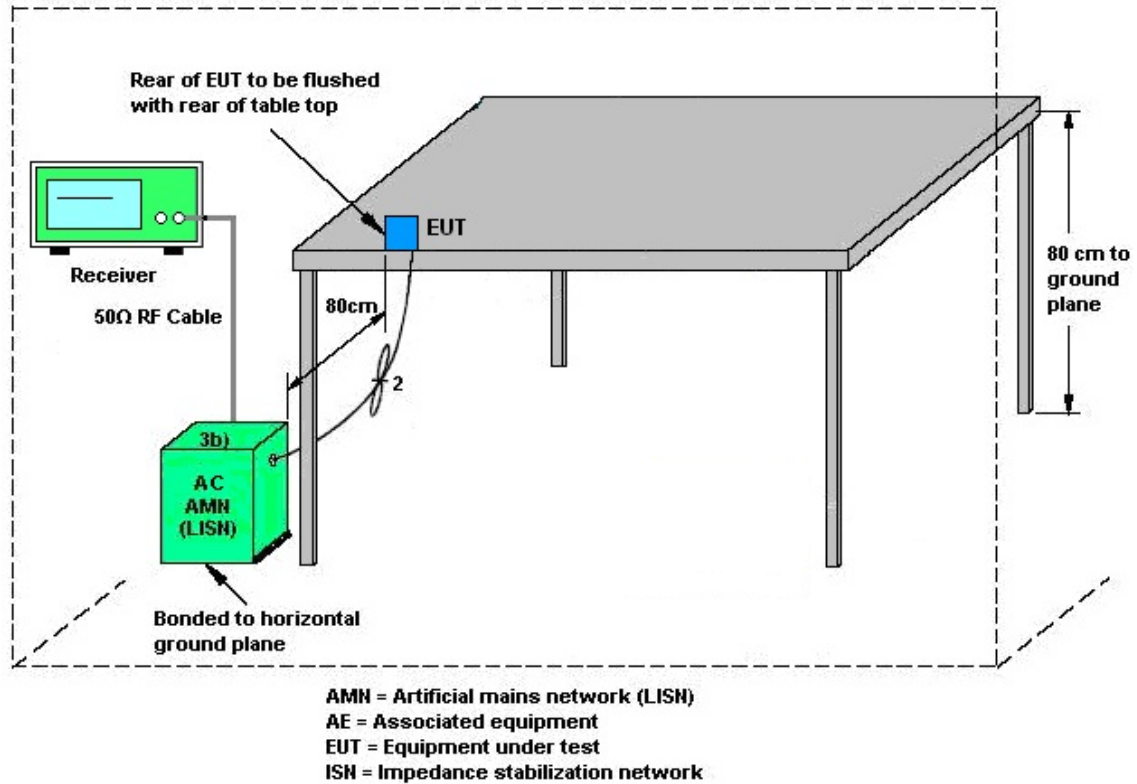


3.9.4 Test Setup



3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the LP0002 Section 2.2, Section 3.10.1.3, and Section 3.10.1.4.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Mar. 25, 2019~ Apr. 24, 2019	Jan. 06, 2020	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-124 1	1GHz ~ 18GHz	Jun. 29, 2018	Mar. 25, 2019~ Apr. 24, 2019	Jun. 28, 2019	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	37059&01	30MHz~1GHz	Oct. 13, 2018	Mar. 25, 2019~ Apr. 24, 2019	Oct. 12, 2019	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Dec. 05, 2018	Mar. 25, 2019~ Apr. 24, 2019	Dec. 04, 2019	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 14, 2018	Mar. 25, 2019~ Apr. 24, 2019	Nov. 13, 2020	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 21, 2018	Mar. 25, 2019~ Apr. 24, 2019	May 20, 2019	Radiation (03CH13-HY)
Amplifier	Sonoma-Instrument	310 N	187282	9KHz~1GHz	Dec. 18, 2018	Mar. 25, 2019~ Apr. 24, 2019	Dec. 17, 2019	Radiation (03CH13-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Mar. 25, 2019~ Apr. 24, 2019	Jul. 15, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Feb. 13, 2019	Mar. 25, 2019~ Apr. 24, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30M-18G	Feb. 13, 2019	Mar. 25, 2019~ Apr. 24, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/ 4	30M-18G	Feb. 13, 2019	Mar. 25, 2019~ Apr. 24, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30M~40GHz	Mar. 13, 2019	Mar. 25, 2019~ Apr. 24, 2019	Mar. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30M~40GHz	Mar. 13, 2019	Mar. 25, 2019~ Apr. 24, 2019	Mar. 12, 2020	Radiation (03CH13-HY)
Spectrum Analyzer	Agilent	N9010A	MY553705 26	10Hz~44GHz	Mar. 19, 2019	Mar. 25, 2019~ Apr. 24, 2019	Mar. 18, 2020	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 25, 2019~ Apr. 24, 2019	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Mar. 25, 2019~ Apr. 24, 2019	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Mar. 25, 2019~ Apr. 24, 2019	N/A	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Mar. 25, 2019~ Apr. 24, 2019	N/A	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY541300 85	20Hz ~ 8.4GHz	Nov. 01, 2018	Mar. 25, 2019~ Apr. 24, 2019	Oct. 31, 2019	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-108 0-1200-15000 -60ST	SN3	1.2G Low Pass	Jul. 05, 2018	Mar. 25, 2019~ Apr. 24, 2019	Jul. 04, 2019	Radiation (03CH13-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN2	3G High Pass	Jul. 16, 2018	Mar. 25, 2019~ Apr. 24, 2019	Jul. 15, 2019	Radiation (03CH13-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 12, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Nov. 12, 2018	Mar. 12, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Mar. 12, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Mar. 12, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 12, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Mar. 12, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Mar. 12, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 27, 2018	Feb.20.2019~ Apr. 13, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 27, 2018	Feb.20.2019~ Apr. 13, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV 30	100895	9kHz~30GHz	Apr. 20, 2018	Feb.20.2019~ Apr. 13, 2019	Apr. 19, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz~40GHz	Nov. 21, 2018	Feb.20.2019~ Apr. 13, 2019	Nov. 20, 2019	Conducted (TH05-HY)
BT Base Station(Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 27, 2018	Feb.20.2019~ Apr. 13, 2019	Sep. 26, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	EM	EMSW18	SW107090 3	N/A	Dec 19 2018	Feb.20.2019~ Apr. 13, 2019	Dec. 18, 2019	Conducted (TH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.2
--	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.9
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

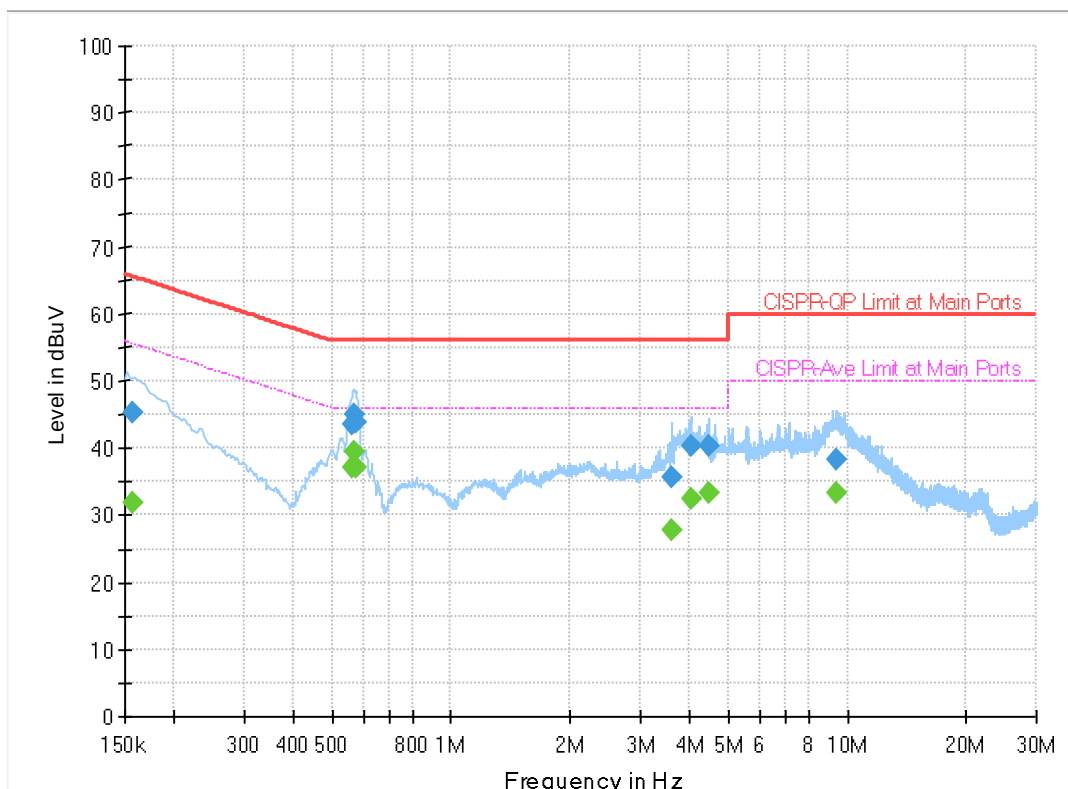
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.4
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.3
--	-----

Appendix A. AC Conducted Emission Test Results

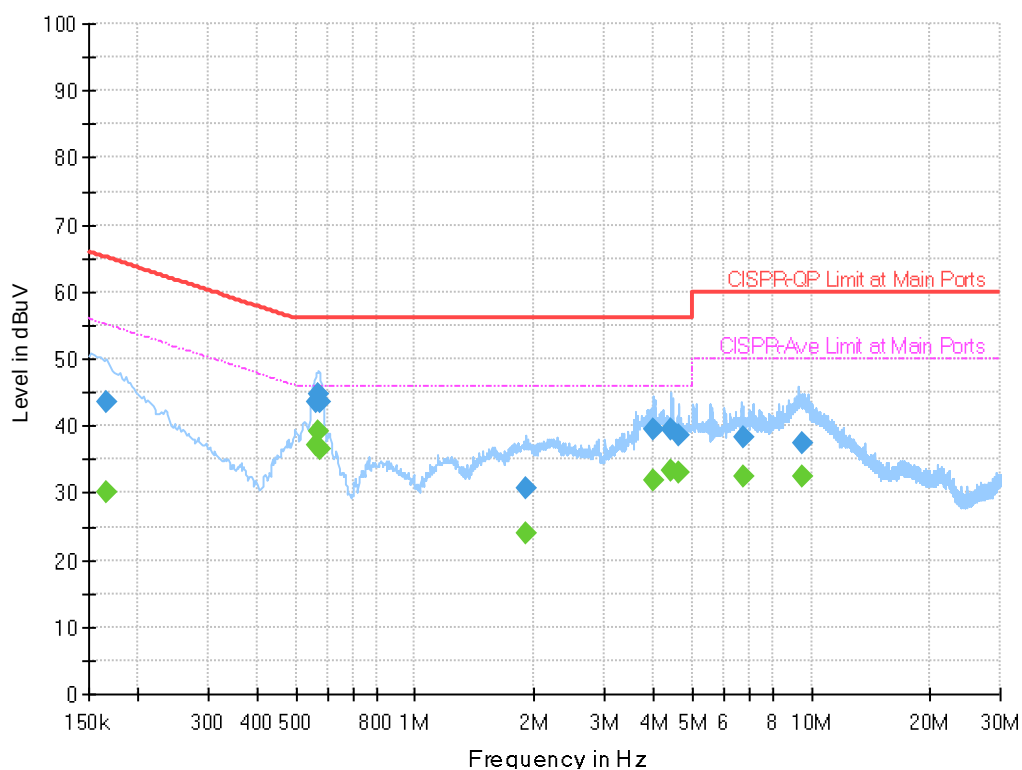
Test Engineer :	Rick Lin	Temperature :	22~24°C
		Relative Humidity :	55~58%
Test Voltage :	120Vac / 60Hz	Phase :	Line



Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	31.97	55.63	23.66	L1	OFF	19.5
0.156750	45.20	---	65.63	20.43	L1	OFF	19.5
0.559500	---	37.15	46.00	8.85	L1	OFF	19.5
0.559500	43.52	---	56.00	12.48	L1	OFF	19.5
0.568500	---	39.45	46.00	6.55	L1	OFF	19.5
0.568500	45.02	---	56.00	10.98	L1	OFF	19.5
0.577500	---	36.99	46.00	9.01	L1	OFF	19.5
0.577500	43.79	---	56.00	12.21	L1	OFF	19.5
3.610500	---	27.70	46.00	18.30	L1	OFF	19.6
3.610500	35.66	---	56.00	20.34	L1	OFF	19.6
4.020000	---	32.52	46.00	13.48	L1	OFF	19.6
4.020000	40.34	---	56.00	15.66	L1	OFF	19.6
4.463250	---	33.21	46.00	12.79	L1	OFF	19.6
4.463250	40.22	---	56.00	15.78	L1	OFF	19.6
9.395250	---	33.25	50.00	16.75	L1	OFF	19.7
9.395250	38.38	---	60.00	21.62	L1	OFF	19.7

Test Engineer :	Rick Lin	Temperature :	22~24°C
		Relative Humidity :	55~58%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.165750	---	30.07	55.17	25.10	N	OFF	19.5
0.165750	43.52	---	65.17	21.65	N	OFF	19.5
0.559500	---	37.02	46.00	8.98	N	OFF	19.5
0.559500	43.44	---	56.00	12.56	N	OFF	19.5
0.568500	---	39.19	46.00	6.81	N	OFF	19.5
0.568500	44.73	---	56.00	11.27	N	OFF	19.5
0.577500	---	36.63	46.00	9.37	N	OFF	19.5
0.577500	43.45	---	56.00	12.55	N	OFF	19.5
1.902750	---	23.86	46.00	22.14	N	OFF	19.6
1.902750	30.62	---	56.00	25.38	N	OFF	19.6
3.997500	---	31.84	46.00	14.16	N	OFF	19.6
3.997500	39.57	---	56.00	16.43	N	OFF	19.6
4.445250	---	33.25	46.00	12.75	N	OFF	19.6
4.445250	39.34	---	56.00	16.66	N	OFF	19.6
4.638750	---	33.11	46.00	12.89	N	OFF	19.6
4.638750	38.66	---	56.00	17.34	N	OFF	19.6
6.706500	---	32.56	50.00	17.44	N	OFF	19.6
6.706500	38.20	---	60.00	21.80	N	OFF	19.6
9.489750	---	32.39	50.00	17.61	N	OFF	19.7
9.489750	37.30	---	60.00	22.70	N	OFF	19.7



Appendix B. Radiated Spurious Emission

Test Engineer :	Alex Jheng, Fu Chen, and Wilson Wu	Temperature :	24.5~25.3°C
		Relative Humidity :	49~53%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2389.905	42.87	-31.13	74	41.23	27.23	3.99	29.58	131	344	P	H
		2389.905	18.11	-35.89	54	-	-	-	-	-	-	A	H
	*	2402	100.01	-	-	98.36	27.23	4	29.58	131	344	P	H
	*	2402	75.25	-	-	-	-	-	-	-	-	A	H
													H
													H
		2378.565	42.89	-31.11	74	41.3	27.19	3.98	29.58	302	17	P	V
		2378.565	18.13	-35.87	54	-	-	-	-	-	-	A	V
	*	2402	95.46	-	-	93.81	27.23	4	29.58	302	17	P	V
	*	2402	70.7	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2388.26	42.89	-31.11	74	41.25	27.23	3.99	29.58	120	345	P	H
		2388.26	18.13	-35.87	54	-	-	-	-	-	-	A	H
	*	2441	99.59	-	-	97.76	27.37	4.04	29.58	120	345	P	H
	*	2441	74.83	-	-	-	-	-	-	-	-	A	H
		2487.61	43.27	-30.73	74	41.27	27.5	4.07	29.57	120	345	P	H
		2487.61	18.51	-35.49	54	-	-	-	-	-	-	A	H
		2310.7	43.27	-30.73	74	41.92	27.01	3.93	29.59	300	21	P	V
		2310.7	18.51	-35.49	54	-	-	-	-	-	-	A	V
	*	2441	95.86	-	-	94.04	27.37	4.03	29.58	300	21	P	V
	*	2441	71.1	-	-	-	-	-	-	-	-	A	V
		2499.51	42.69	-31.31	74	40.68	27.5	4.08	29.57	300	21	P	V
		2499.51	17.93	-36.07	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	99.63	-	-	97.67	27.46	4.07	29.57	116	344	P	H
	*	2480	74.87	-	-	-	-	-	-	-	-	A	H
		2483.64	47.1	-26.9	74	45.14	27.46	4.07	29.57	116	344	P	H
		2483.64	22.34	-31.66	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	95.59	-	-	93.63	27.46	4.07	29.57	284	22	P	V
	*	2480	70.83	-	-	-	-	-	-	-	-	A	V
		2483.52	43.56	-30.44	74	41.6	27.46	4.07	29.57	284	22	P	V
		2483.52	18.8	-35.2	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	37.37	-36.63	74	57.38	31.22	6.36	57.59	100	0	P	H
		4804	12.61	-41.39	54	-	-	-	-	-	-	A	H
													H
													H
		4804	36.57	-37.43	74	56.58	31.22	6.36	57.59	100	0	P	V
		4804	11.81	-42.19	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	38.1	-35.9	74	57.59	31.36	6.59	57.44	100	0	P	H
		4882	13.34	-40.66	54	-	-	-	-	-	-	A	H
		7323	42.81	-31.19	74	55.69	36.22	8.19	57.29	100	0	P	H
		7323	18.05	-35.95	54	-	-	-	-	-	-	A	H
		4882	37.72	-36.28	74	57.21	31.36	6.59	57.44	100	0	P	V
		4882	12.96	-41.04	54	-	-	-	-	-	-	A	V
		7323	42.77	-31.23	74	55.65	36.22	8.19	57.29	100	0	P	V
		7323	18.01	-35.99	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	38.51	-35.49	74	57.45	31.53	6.81	57.28	100	0	P	H
		4960	13.75	-40.25	54	-	-	-	-	-	-	A	H
		7440	42.96	-31.04	74	55.71	36.49	8.19	57.43	100	0	P	H
		7440	18.2	-35.8	54	-	-	-	-	-	-	A	H
		4960	39.02	-34.98	74	57.96	31.53	6.81	57.28	100	0	P	V
		4960	14.26	-39.74	54	-	-	-	-	-	-	A	V
		7440	43.92	-30.08	74	56.67	36.49	8.19	57.43	100	0	P	V
		7440	19.16	-34.84	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		71.71	30.58	-9.42	40	49.79	12.39	0.66	32.26	-	-	P	H
		138.64	37.31	-6.19	43.5	51.13	17.34	1.02	32.18	100	0	P	H
		272.5	33.47	-12.53	46	45.15	19.07	1.4	32.15	-	-	P	H
		363.68	34.68	-11.32	46	44.45	20.79	1.6	32.16	-	-	P	H
		874.87	33.34	-12.66	46	33.11	29.15	2.61	31.53	-	-	P	H
		956.35	33.57	-12.43	46	31.07	30.75	2.68	30.93	-	-	P	H
													H
													H
													H
													H
													H
													H
		31.94	33.1	-6.9	40	41.61	23.32	0.46	32.29	-	-	P	V
		40.67	33.69	-6.31	40	46.59	18.87	0.52	32.29	100	0	P	V
		66.86	33.31	-6.69	40	53	11.92	0.65	32.26	-	-	P	V
		108.57	30.02	-13.48	43.5	44.56	16.78	0.88	32.2	-	-	P	V
		146.4	31.93	-11.57	43.5	45.79	17.28	1.04	32.18	-	-	P	V
		898.15	36.56	-9.44	46	36.37	29	2.61	31.42	-	-	P	V
													V
													V
												V	
												V	
												V	
												V	
Remark	<div>1. No other spurious found.</div> <div>2. All results are PASS against limit line.</div>												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



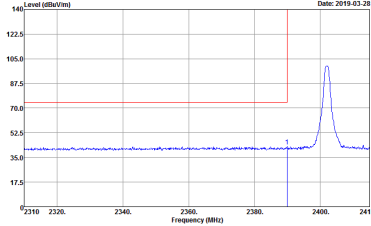
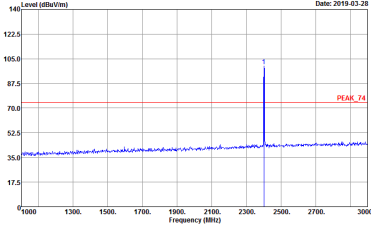
Appendix C. Radiated Spurious Emission Plots

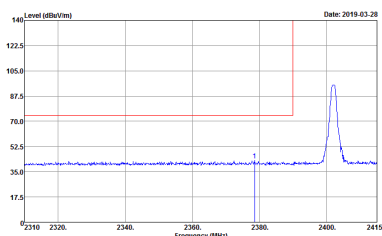
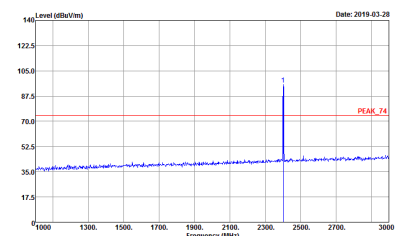
Test Engineer :	Alex Jheng, Fu Chen, and Wilson Wu	Temperature :	24.5~25.3°C
		Relative Humidity :	49~53%

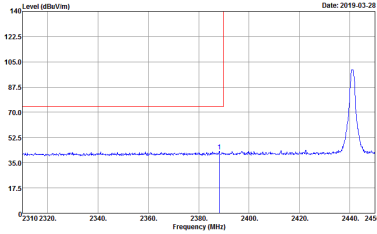
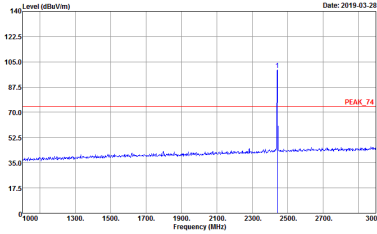
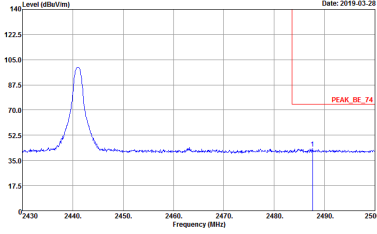
Note symbol

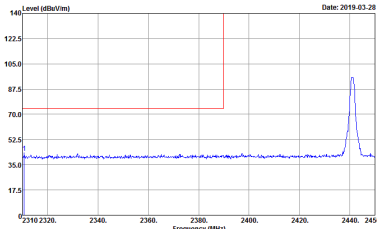
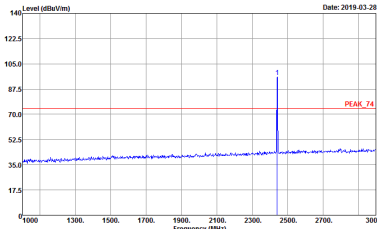
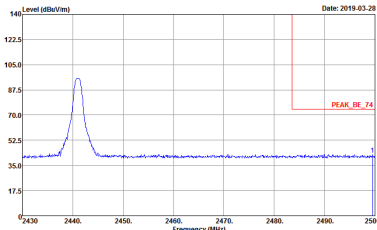
-L	Low channel location
-R	High channel location

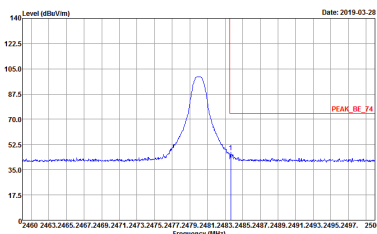
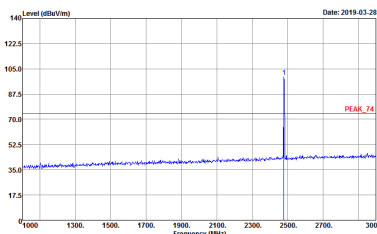
2.4GHz 2400~2483.5MHz
BT (Band Edge @ 3m)

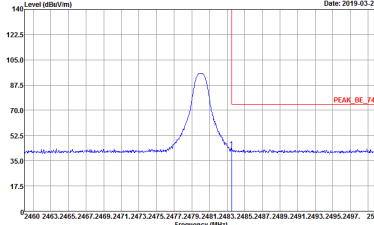
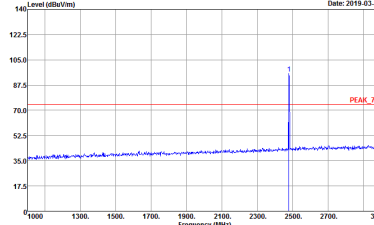
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p> Site : 03CH13-1FV Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 911110 Mode : 1 </p>	 <p> Site : 03CH13-1FV Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 911110 Mode : 1 </p>

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p> Site : 03CH13-HV Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 1 </p>	 <p> Site : 03CH13-HV Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 1 </p>

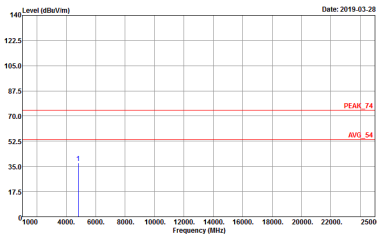
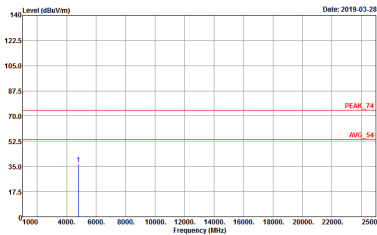
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 <p> Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZ.ONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 2 </p>	 <p> Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZ.ONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 2 </p>
Peak	 <p> Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZ.ONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 2 </p>	Left blank

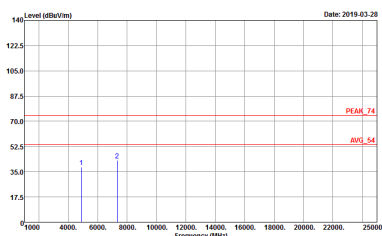
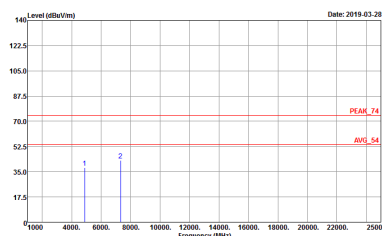
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	 <p> Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 911110 Mode : 2 </p>	 <p> Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 911110 Mode : 2 </p>
	 <p> Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 911110 Mode : 2 </p>	Left blank

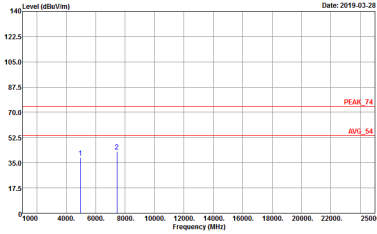
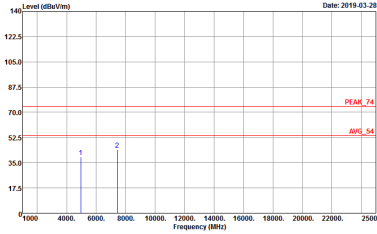
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HV Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 3</p>	 <p>Site : 03CH13-HV Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 3</p>

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	 <p> Site : 03CH13-HV Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 3 </p>	 <p> Site : 03CH13-HV Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110 Mode : 3 </p>

2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 911110 Mode : 1</p>	 <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 911110 Mode : 1</p>

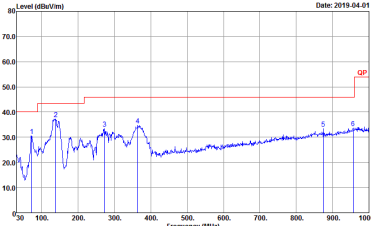
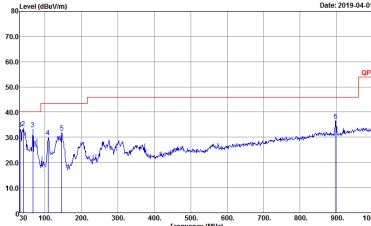
BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	 <p> Site : 03CH13-HV Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 911110 Mode : 2 </p>	 <p> Site : 03CH13-HV Condition : PEAK_74 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 911110 Mode : 2 </p>

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH13-4V Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 911110 Mode : 3</p>	 <p>Site : 03CH13-4V Condition : PEAK_74 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 911110 Mode : 3</p>



Emission below 1GHz

2.4GHz BT (LF)

BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH13-HY Condition : QP 3m BTL06_37059401 HORIZONTAL Detector : Peak Project : 911110 Mode : S3</p>	 <p>Site : 03CH13-HY Condition : QP 3m BTL06_37059401 VERTICAL Detector : Peak Project : 911110 Mode : S3</p>

Annex. A Receiver Radiated Emission Measurement

A.1 Limit of Receiver Radiated Emission

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

A.2 Measuring Instruments

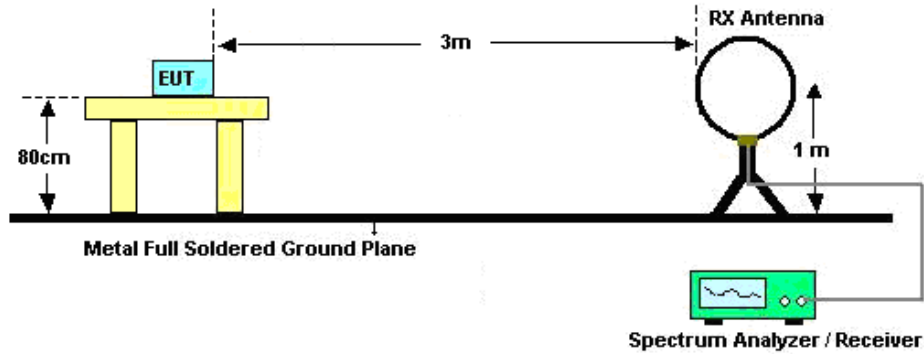
See list of measuring equipment of this test report.

A.3 Test Procedures

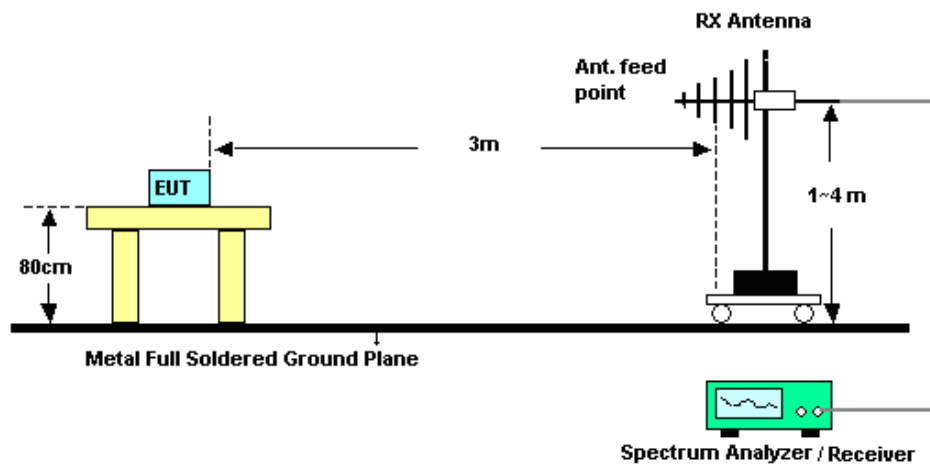
1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest radiation.
5. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
6. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
8. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
9. Emission level (dBμV/m) = 20 log Emission level (μV/m)
10. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

A.4 Test Setup

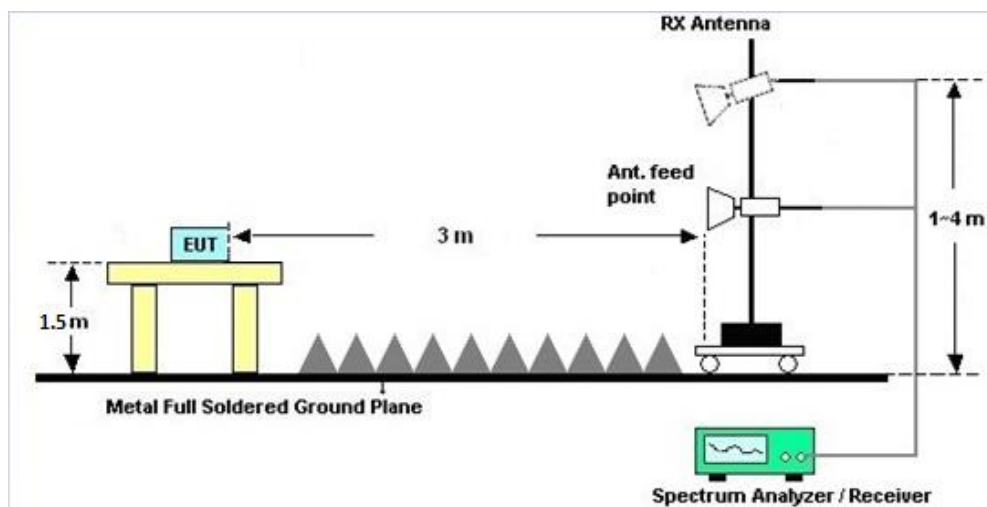
For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz

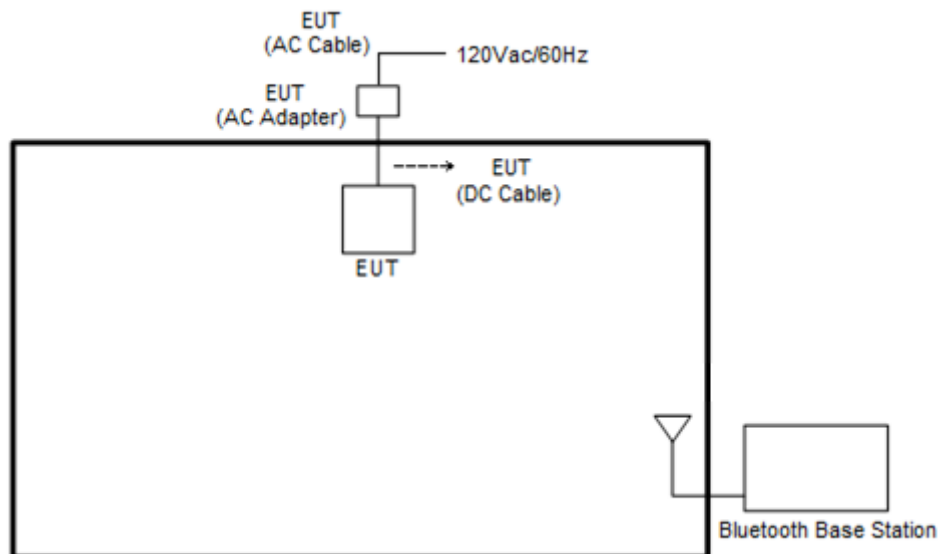


A.5 Test Result of Receiver Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per NCC LP0002 section 5.13 was not reported.

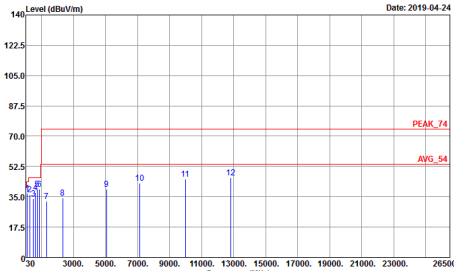
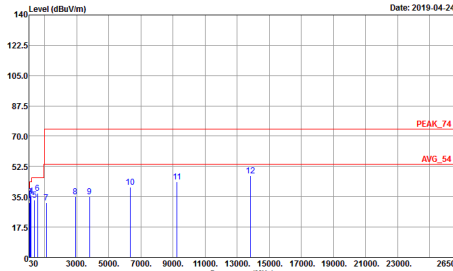
There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

A.6 Connection Diagram of Test System



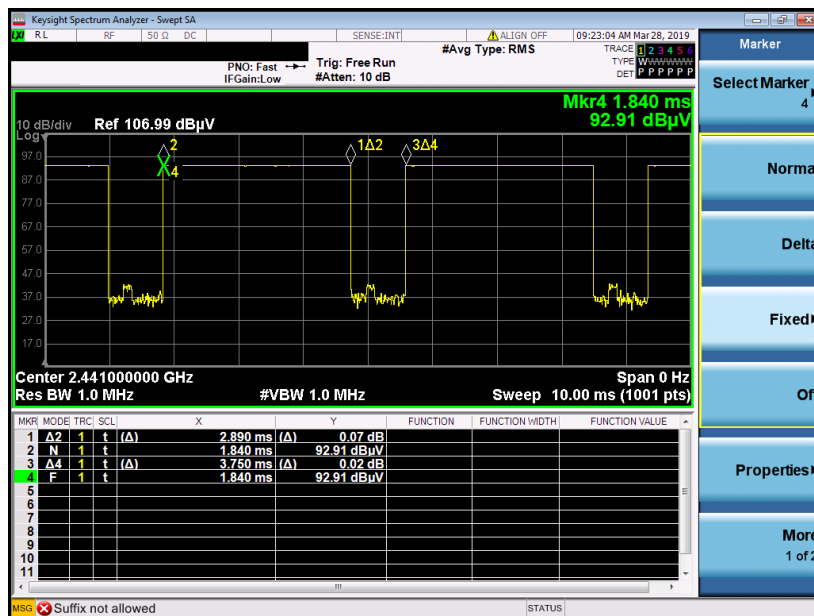
A.7 Test Result of Receiver Radiated Spurious Emission (30MHz ~ 5th Harmonic)

Test Engineer :	Alex Jheng, Fu Chen, and Wilson Wu	Temperature :	24.5~25.3°C
		Relative Humidity :	49~53%
Frequency	118.270 MHz	Margin	Under 6.55 dB
Test Mode	Bluetooth Rx + USB Cable (Charging from Adapter)		

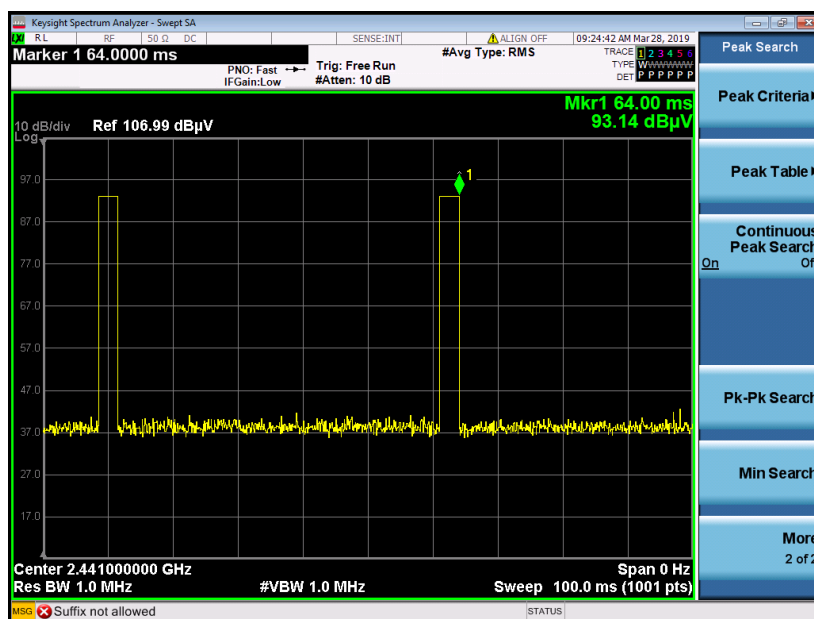
		Idle Mode																																																																																																																																																																																																																																																																																																																																							
		Horizontal										Vertical																																																																																																																																																																																																																																																																																																																													
Peak Avg.		Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 911110 Mode : 5											Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 911110 Mode : 5																																																																																																																																																																																																																																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>118.27</td><td>36.95</td><td>-6.55</td><td>43.50</td><td>50.92</td><td>17.29</td><td>0.87</td><td>32.20</td><td>100</td><td>0 Peak</td></tr><tr><td>2</td><td>275.41</td><td>36.13</td><td>-9.87</td><td>46.00</td><td>47.94</td><td>18.94</td><td>1.31</td><td>32.15</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>497.54</td><td>34.12</td><td>-11.88</td><td>46.00</td><td>40.53</td><td>23.92</td><td>1.76</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>632.37</td><td>37.33</td><td>-8.67</td><td>46.00</td><td>41.23</td><td>26.11</td><td>2.07</td><td>32.19</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>739.07</td><td>39.44</td><td>-6.56</td><td>46.00</td><td>41.28</td><td>27.85</td><td>2.18</td><td>32.01</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>871.96</td><td>39.27</td><td>-6.73</td><td>46.00</td><td>39.02</td><td>29.18</td><td>2.45</td><td>31.54</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>7</td><td>1330.00</td><td>32.42</td><td>-41.58</td><td>74.00</td><td>62.20</td><td>25.16</td><td>3.10</td><td>58.04</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>8</td><td>2328.00</td><td>34.17</td><td>-39.83</td><td>74.00</td><td>60.15</td><td>27.05</td><td>4.21</td><td>57.24</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>9</td><td>5864.00</td><td>39.46</td><td>-34.54</td><td>74.00</td><td>58.36</td><td>31.64</td><td>6.49</td><td>57.03</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>10</td><td>7134.00</td><td>43.00</td><td>-31.00</td><td>74.00</td><td>56.54</td><td>35.80</td><td>7.72</td><td>57.06</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>11</td><td>9990.00</td><td>45.37</td><td>-28.63</td><td>74.00</td><td>54.18</td><td>39.10</td><td>9.19</td><td>57.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>12</td><td>12816.00</td><td>46.14</td><td>-27.86</td><td>74.00</td><td>53.73</td><td>38.81</td><td>10.52</td><td>56.92</td><td>100</td><td>0 Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	118.27	36.95	-6.55	43.50	50.92	17.29	0.87	32.20	100	0 Peak	2	275.41	36.13	-9.87	46.00	47.94	18.94	1.31	32.15	---	---	Peak	3	497.54	34.12	-11.88	46.00	40.53	23.92	1.76	32.17	---	---	Peak	4	632.37	37.33	-8.67	46.00	41.23	26.11	2.07	32.19	---	---	Peak	5	739.07	39.44	-6.56	46.00	41.28	27.85	2.18	32.01	---	---	Peak	6	871.96	39.27	-6.73	46.00	39.02	29.18	2.45	31.54	---	---	Peak	7	1330.00	32.42	-41.58	74.00	62.20	25.16	3.10	58.04	---	---	Peak	8	2328.00	34.17	-39.83	74.00	60.15	27.05	4.21	57.24	---	---	Peak	9	5864.00	39.46	-34.54	74.00	58.36	31.64	6.49	57.03	---	---	Peak	10	7134.00	43.00	-31.00	74.00	56.54	35.80	7.72	57.06	---	---	Peak	11	9990.00	45.37	-28.63	74.00	54.18	39.10	9.19	57.10	---	---	Peak	12	12816.00	46.14	-27.86	74.00	53.73	38.81	10.52	56.92	100	0 Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>32.91</td><td>32.59</td><td>-7.41</td><td>40.00</td><td>41.56</td><td>22.89</td><td>0.45</td><td>32.29</td><td>100</td><td>0 Peak</td></tr><tr><td>2</td><td>61.04</td><td>31.46</td><td>-8.54</td><td>40.00</td><td>51.39</td><td>11.78</td><td>0.58</td><td>32.27</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>108.57</td><td>34.92</td><td>-8.58</td><td>43.50</td><td>49.41</td><td>16.78</td><td>0.82</td><td>32.20</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>174.53</td><td>35.46</td><td>-8.04</td><td>43.50</td><td>51.15</td><td>15.36</td><td>1.04</td><td>32.16</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>367.56</td><td>33.08</td><td>-12.92</td><td>46.00</td><td>42.77</td><td>20.86</td><td>1.53</td><td>32.16</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>569.32</td><td>37.16</td><td>-8.84</td><td>46.00</td><td>41.68</td><td>25.65</td><td>1.95</td><td>32.22</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>7</td><td>1108.00</td><td>31.59</td><td>-42.41</td><td>74.00</td><td>62.30</td><td>24.71</td><td>2.79</td><td>58.21</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>8</td><td>2920.00</td><td>35.02</td><td>-38.98</td><td>74.00</td><td>59.44</td><td>28.42</td><td>4.68</td><td>57.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>9</td><td>3790.00</td><td>35.20</td><td>-38.80</td><td>74.00</td><td>58.08</td><td>29.36</td><td>5.42</td><td>58.46</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>10</td><td>6342.00</td><td>40.48</td><td>-33.52</td><td>74.00</td><td>55.18</td><td>33.73</td><td>7.25</td><td>55.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>11</td><td>9261.00</td><td>43.84</td><td>-30.16</td><td>74.00</td><td>53.70</td><td>38.22</td><td>8.68</td><td>56.76</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>12</td><td>13851.00</td><td>47.27</td><td>-26.73</td><td>74.00</td><td>52.85</td><td>40.62</td><td>11.17</td><td>57.37</td><td>100</td><td>0 Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	32.91	32.59	-7.41	40.00	41.56	22.89	0.45	32.29	100	0 Peak	2	61.04	31.46	-8.54	40.00	51.39	11.78	0.58	32.27	---	---	Peak	3	108.57	34.92	-8.58	43.50	49.41	16.78	0.82	32.20	---	---	Peak	4	174.53	35.46	-8.04	43.50	51.15	15.36	1.04	32.16	---	---	Peak	5	367.56	33.08	-12.92	46.00	42.77	20.86	1.53	32.16	---	---	Peak	6	569.32	37.16	-8.84	46.00	41.68	25.65	1.95	32.22	---	---	Peak	7	1108.00	31.59	-42.41	74.00	62.30	24.71	2.79	58.21	---	---	Peak	8	2920.00	35.02	-38.98	74.00	59.44	28.42	4.68	57.52	---	---	Peak	9	3790.00	35.20	-38.80	74.00	58.08	29.36	5.42	58.46	---	---	Peak	10	6342.00	40.48	-33.52	74.00	55.18	33.73	7.25	55.68	---	---	Peak	11	9261.00	43.84	-30.16	74.00	53.70	38.22	8.68	56.76	---	---	Peak	12	13851.00	47.27	-26.73	74.00	52.85	40.62	11.17	57.37	100
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																																																																																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																															
1	118.27	36.95	-6.55	43.50	50.92	17.29	0.87	32.20	100	0 Peak																																																																																																																																																																																																																																																																																																																															
2	275.41	36.13	-9.87	46.00	47.94	18.94	1.31	32.15	---	---	Peak																																																																																																																																																																																																																																																																																																																														
3	497.54	34.12	-11.88	46.00	40.53	23.92	1.76	32.17	---	---	Peak																																																																																																																																																																																																																																																																																																																														
4	632.37	37.33	-8.67	46.00	41.23	26.11	2.07	32.19	---	---	Peak																																																																																																																																																																																																																																																																																																																														
5	739.07	39.44	-6.56	46.00	41.28	27.85	2.18	32.01	---	---	Peak																																																																																																																																																																																																																																																																																																																														
6	871.96	39.27	-6.73	46.00	39.02	29.18	2.45	31.54	---	---	Peak																																																																																																																																																																																																																																																																																																																														
7	1330.00	32.42	-41.58	74.00	62.20	25.16	3.10	58.04	---	---	Peak																																																																																																																																																																																																																																																																																																																														
8	2328.00	34.17	-39.83	74.00	60.15	27.05	4.21	57.24	---	---	Peak																																																																																																																																																																																																																																																																																																																														
9	5864.00	39.46	-34.54	74.00	58.36	31.64	6.49	57.03	---	---	Peak																																																																																																																																																																																																																																																																																																																														
10	7134.00	43.00	-31.00	74.00	56.54	35.80	7.72	57.06	---	---	Peak																																																																																																																																																																																																																																																																																																																														
11	9990.00	45.37	-28.63	74.00	54.18	39.10	9.19	57.10	---	---	Peak																																																																																																																																																																																																																																																																																																																														
12	12816.00	46.14	-27.86	74.00	53.73	38.81	10.52	56.92	100	0 Peak																																																																																																																																																																																																																																																																																																																															
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																																																																																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																															
1	32.91	32.59	-7.41	40.00	41.56	22.89	0.45	32.29	100	0 Peak																																																																																																																																																																																																																																																																																																																															
2	61.04	31.46	-8.54	40.00	51.39	11.78	0.58	32.27	---	---	Peak																																																																																																																																																																																																																																																																																																																														
3	108.57	34.92	-8.58	43.50	49.41	16.78	0.82	32.20	---	---	Peak																																																																																																																																																																																																																																																																																																																														
4	174.53	35.46	-8.04	43.50	51.15	15.36	1.04	32.16	---	---	Peak																																																																																																																																																																																																																																																																																																																														
5	367.56	33.08	-12.92	46.00	42.77	20.86	1.53	32.16	---	---	Peak																																																																																																																																																																																																																																																																																																																														
6	569.32	37.16	-8.84	46.00	41.68	25.65	1.95	32.22	---	---	Peak																																																																																																																																																																																																																																																																																																																														
7	1108.00	31.59	-42.41	74.00	62.30	24.71	2.79	58.21	---	---	Peak																																																																																																																																																																																																																																																																																																																														
8	2920.00	35.02	-38.98	74.00	59.44	28.42	4.68	57.52	---	---	Peak																																																																																																																																																																																																																																																																																																																														
9	3790.00	35.20	-38.80	74.00	58.08	29.36	5.42	58.46	---	---	Peak																																																																																																																																																																																																																																																																																																																														
10	6342.00	40.48	-33.52	74.00	55.18	33.73	7.25	55.68	---	---	Peak																																																																																																																																																																																																																																																																																																																														
11	9261.00	43.84	-30.16	74.00	53.70	38.22	8.68	56.76	---	---	Peak																																																																																																																																																																																																																																																																																																																														
12	13851.00	47.27	-26.73	74.00	52.85	40.62	11.17	57.37	100	0 Peak																																																																																																																																																																																																																																																																																																																															

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39



on time (Count Pulses) Plot on Channel 39



Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.89 / 100 = 5.7828 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.82 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.82\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.782 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.782 \text{ ms}/100\text{ms}) = -24.76 \text{ dB}$$