

TEST REPORT

Report No.: CSTC-26060262E

Applicant: Shenzhen Reletech Technology Co., Ltd

Product Name: Pet feeder

Main test model: ZK01-02

Tested Date: Jun. 30, 2026 to Jul. 06, 2026

Issued Date: Jul. 06, 2026

Shenzhen CSTC Testing Co., Ltd.

Product Name: Pet feeder

Trademark: DOUDOU PET

Model/Type Ref.: ZK01-02
ZK01-01, ZK02-01, ZK02-02

Prepared For: Shenzhen Reletech Technology Co., Ltd

Address: Room 516&517, Building B, Xintang Smart Park, No. 11, Zhongxing Road,
Ma'antangCommunity, Bantian Subdistrict, Longgang District, Shenzhen,
Guangdong, China

Manufacturer: Shenzhen Reletech Technology Co., Ltd

Address: Room 516&517, Building B, Xintang Smart Park, No. 11, Zhongxing Road,
Ma'antangCommunity, Bantian Subdistrict, Longgang District, Shenzhen,
Guangdong, China

Prepared By: Shenzhen CSTC Testing Co., Ltd.

Address: No. 101, Building 1, Shajing Wanfeng Huafeng Entrepreneurship Park, Heyi
Community, Shajing Street, Bao 'an District, Shenzhen City, Guangdong
Province, China.

Sample Received Date: Jun. 30, 2026

Sample tested Date: Jun. 30, 2026 to Jul. 06, 2026

Issue Date: Jul. 06, 2026

Report No.: CSTC-26060262E

Test Standards: Article 2 paragraph 1 of item 19
MIC Notice No.88 Annex 1
MIC Notice No.88 Annex 43

Test Results: PASS

Remark: This is JAPAN RADIO test report.

Tested by:



Alan Wang/Project Handler



The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CSTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENTS

PAGE

1. VERSION.....	5
2. TSUMMARY OF TEST RESULTS.....	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 Description of test modes.....	9
3.3 TEST CONDITIONS	10
3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	10
3.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE).....	10
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. RF SHIELDING METHOD	12
5.TEST RESULTS	13
5.1 FREQUENCY ERROR.....	13
5.1.1 LIMIT.....	13
5.1.2 MEASURING INSTRUMENTS AND SETTING.....	13
5.1.3 TEST PROCEDURES.....	13
5.1.4 TEST SETUP LAYOUT	13
5.1.5 EUT OPERATION DURING TEST	13
5.1.6 RESULTS OF FREQUENCY ERROR	14
5.2 99% OCCUPIED BANDWIDTH.....	17
5.2.1 LIMIT.....	17
5.2.2 TEST PROCEDURES.....	17
5.2.3 TEST SETUP LAYOUT	17
5.2.4 TEST DEVIATION	17
5.2.5 EUT OPERATION DURING TEST	17
5.2.6 TEST RESULT	18
5.3.1 LIMIT.....	30
5.3.2 MEASURING INSTRUMENTS AND SETTING.....	30
5.3.3 TEST PROCEDURES.....	30
5.3.4 TEST SETUP LAYOUT	30
5.3.5 TEST DEVIATION	30
5.3.6 EUT OPERATION DURING TEST	30
5.3.7 TEST RESULT	31
5.4 ANTENNA POWER ERROR MEASUREMENT	89
5.4.1 LIMIT.....	89

5.4.2 TEST PROCEDURES.....	89
5.4.3 TEST SETUP LAYOUT	89
5.4.4 EST DEVIATION	89
5.4.5 EUT OPERATION DURING TEST	89
5.4.6 TEST RESULT	90
5.5 IMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT	104
5.5.1 LIMIT	104
5.5.2 MEASURING INSTRUMENTS AND SETTING.....	104
5.5.3 TEST PROCEDURES.....	104
5.5.4 TEST SETUP LAYOUT	104
5.5.6 TEST DEVIATION	104
5.5.7 EUT OPERATION DURING TEST	104
5.5.8 TEST RESULT	105
5.6 RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT	112
5.6.1 LIMIT	112
5.6.2 MEASURING ID CODE SOFTWARE	112
5.6.3 TEST PROCEDURES.....	112
5.6.4 TEST SETUP LAYOUT	112
5.6.5 TEST DEVIATION	112
5.6.6 EUT OPERATION DURING TEST	112
5.6.7 TEST RESULT OF RADIO INTERFERENCE PREVENTION CAPABILIT	113
5.7 CARRIER SENSE CAPABILITY	114
5.7.1 LIMIT	114
5.7.2 TEST PROCEDURE	114
5.7.3 TEST RESULT	115
6. EUT TEST PHOTO.....	116
7. EUT CONSTRUCTIONAL DETAILS	116

1. VERSION

Report No.	Version	Description	Approved
CSTC-26060262E	Rev.01	Initial issue of report	Jul. 06, 2026




2. TSUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

NO.	Test Item	Test Requirement	Result
1	RF shielding method	item 19 Clause 3.7	Pass
2	Frequency Error	item 19 Clause 3.2(4)	Pass
3	Antenna Power & EIRP Power	item 19 Clause 3.2(2)	Pass
4	99% Occupied bandwidth	item 19 Clause 3.2(7)	Pass
5	Spurious Emissions Intensity	item 19 Clause 3.2(6)	Pass
6	Limit of secondary radiated emissions	item 19 Clause 3.3(1)	Pass
7	Interference suppression	item 19 Clause 3.4.1	Pass
8	Transmission Antenna Gain	item 19 Clause 3.6	N/A*
9	Transmission Radiation Angle Width(3dB Beam width)	item 19 Clause 3.6	N/A*
10	CARRIER SENSE CAPABILITY	item 19 Clause 3.6	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

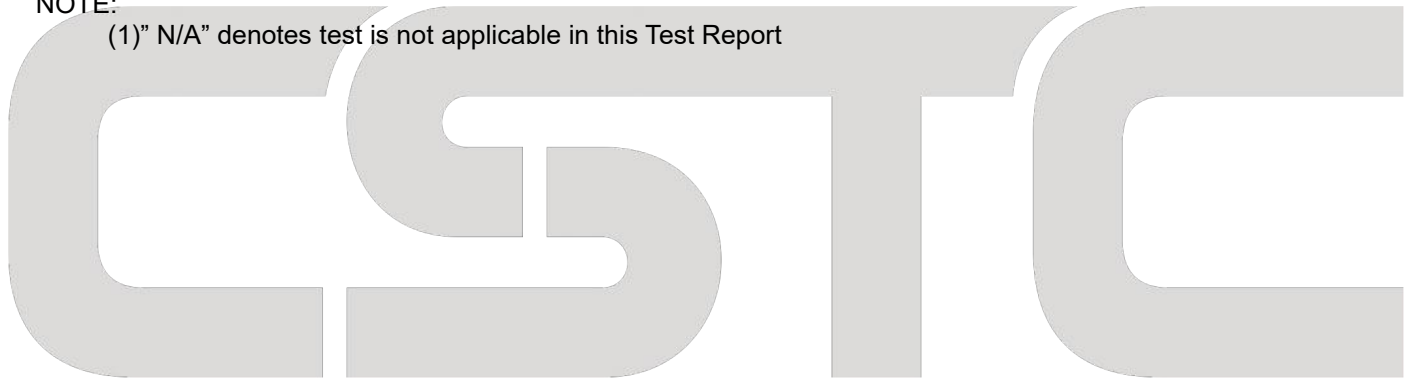

2.1 TEST FACILITY

Shenzhen CSTC Testing Co., Ltd.

Add. : No. 101, Building 1, Shajing Wanfeng Huafeng Entrepreneurship Park, Heyi Community, Shajing Street, Bao 'an District, Shenzhen City, Guangdong Province, China.

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	Radiated Emission Test	$\pm 4.7\text{dB}$
3	RF power conducted	$\pm 0.16\text{dB}$
4	Spurious emissions conducted	$\pm 0.21\text{dB}$
5	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions radiated(>1G)	$\pm 5.0\text{dB}$
7	frequency error ppm	$\pm 0.5\text{ppm}$
8	RF Occupied Bandwidth	$U=1.8\text{MHz}$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Designation	Pet feeder
Model Name	ZK01-02
Series models:	ZK01-01 ZK02-01 ZK02-02
Model Description	Model differences: All the model are the same circuit and RF module, except model names and appearance color.
Hardware Version:	V1.0
Software Version:	V1.0
Modulation Type	802.11b: DSSS 802.11g/n: DSSS, OFDM 802.11ax: OFDMA
Operation Frequency	2412~2472 MHz for 802.11b/g/n(HT20). 2422~2462 MHz for 802.11n(HT40) 2412~2472 MHz for 802.11ax(HE20). 2422~2462 MHz for 802.1ax(HE40)
Channel No.	13 Channels for 802.11b/g/n(HT20) 11 Channels for 802.11n(HT40) 13 Channels for 802.11ax(HE20) 11 Channels for 802.11ax(HE40)
Channel space	5MHz
Rated power:	802.11b, Max 3mW/MHz 802.11g, Max 3mW/MHz 802.11n20, Max 2mW/MHz 802.11n40, Max 1mW/MHz 802.11ax20, Max 2mW/MHz 802.11ax40, Max 1mW/MHz
Antenna Specification:	FPC Antenna
Antenna Gain:	1.48 dBi
Ratings:	Input: 5V  2A Battery: DC 3.7V 8000mAh, 29.6Wh

Channel List for 802.11b/g/n20/ax20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452	13	2472
02	2417	06	2437	10	2457		
03	2422	07	2442	11	2462		
04	2427	08	2447	12	2467		
Channel List for n40/ax40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
03	2422	07	2442	11	2462		
04	2427	08	2447				
05	2432	09	2452				
06	2437	10	2457				

3.2 Description of test modes

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The EUT was tuned to a low, middle, and high channel for all tests. For all test case pre/scans were completed in all Modes to determine worst case levels. test software CMD used for controlling the EUT.

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of DSSS and OFDM.


Test Software: CMD

Test Mode	Power Level	Power Level	Power Level
802.11b	2412/15	2442/12	2472/13
802.11g	2412/50	2442/50	2472/50
802.11n20	2412/50	2442/45	2472/50
802.11n40	2422/50	2442/50	2462/50
802.11ax20	2412/40	2442/45	2472/43
802.11axa40	2422/45	2442/45	2462/43

3.3 TEST CONDITIONS

Supply Voltage				
	Input Voltage (VDC)		Voltage at the input of the RF Circuit (Vdc)	Tolerance (%)
Normal	3.7	Normal	3.3	
+10%	4.07	+10%	3.3	0
-10%	3.33	-10%	3.3	0
Others				
Temperature (°C)		20-25		
Relative humidity		51%.		
ATM Pressure:		1019 mbar		
Note 1: When the input voltage is reduced or increased by 10%, the regulator voltage changes of less than 1%.So the following test items are conducted in the normal voltage.				

3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Pet feeder	N/A	ZK01-02	N/A	EUT
E-2	PC	N/A	Thinkpad S2	N/A	Equipment

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Calibration company: Guangzhou LiSai Metrology & Test Co., Ltd. (Article 24-2, Paragraph 4 of the Radio Act) method c

Radiation Emissions & Radiation Spurious Emissions Test


Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 17, 2025	Sep. 16, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 17, 2025	Sep. 16, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 17, 2025	Sep. 16, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 17, 2025	Sep. 16, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 17, 2025	Sep. 16, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 17, 2025	Sep. 16, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Sep. 17, 2025	Sep. 16, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 17, 2025	Sep. 16, 2026
signal 9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 17, 2025	Sep. 16, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 17, 2025	Sep. 16, 2026
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 17, 2025	Sep. 16, 2026
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 17, 2025	Sep. 16, 2026
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 17, 2025	Sep. 16, 2026
14	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 17, 2025	Sep. 16, 2026
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\
18	Power Meter	KEYSIGHT	N1912AP	926431	A.05.00	Sep. 17, 2025	Sep. 16, 2026
19	Attenuator	GuoRenTong Xin	SGR-SJQ-6 dB-DC-3	N/A	N/A	Sep. 17, 2025	Sep. 16, 2026
20	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 17, 2025	Sep. 16, 2026

4. RF SHIELDING METHOD

Chipset:

The product structure is uses SMD patch process.

As shown in the picture, If the will be open so the product be damage.

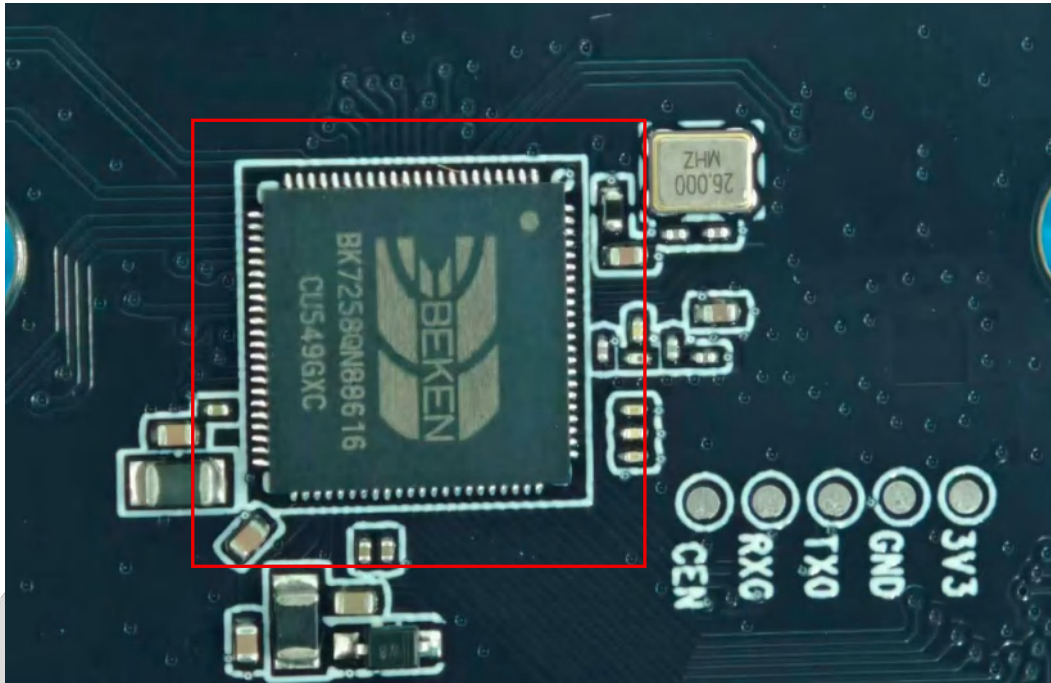

5.TEST RESULTS

5.1 FREQUENCY ERROR

5.1.1 LIMIT

Item	Limits
Frequency Error	±50ppm

5.1.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	10KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.3 TEST PROCEDURES

- (1)In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.
- (2)In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.
- (3)In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer.
- (4)In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.

In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.

5.1.4 TEST SETUP LAYOUT

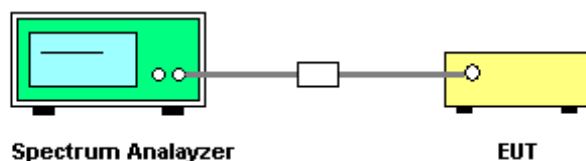


5.1.5 EUT OPERATION DURING TEST

The EUT was placed on the test table and programmed in un-modulation function.


5.1.6 RESULTS OF FREQUENCY ERROR

Test mode	Test voltage	Frequency (MHz)	Read (MHz)	Tolerance (ppm)	Limit (ppm)	Result
Un-modulation mode	Normal	2412	2412.003	1.24	±50.00	Pass
		2442	2441.999	-0.41		
		2472	2472.	0.00		
		2422	2422	0.00		
		2462	2462.001	0.41		


CH01 - 2412MHz

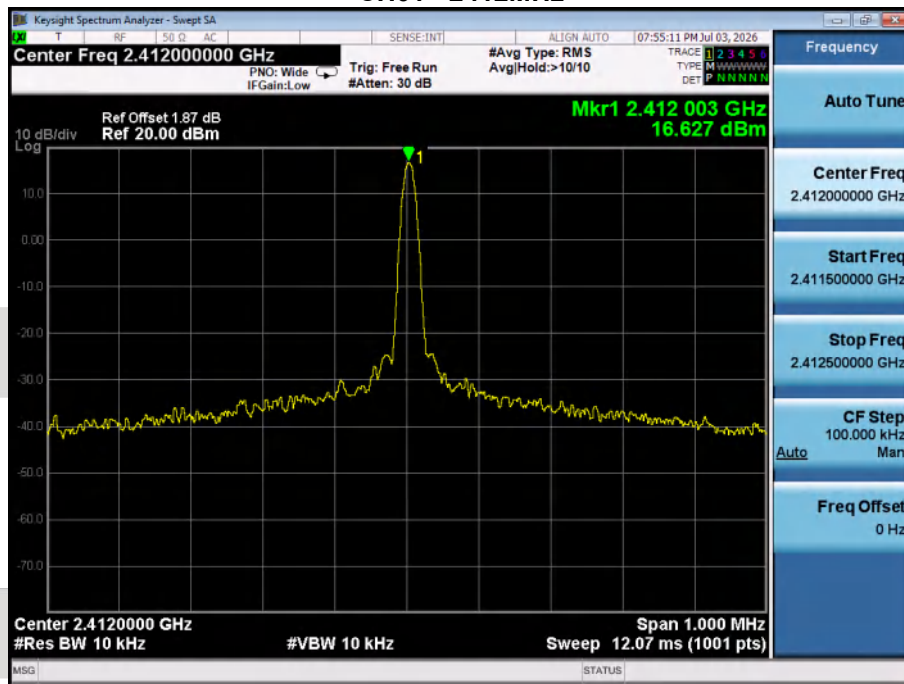


CH07 - 2442MHz

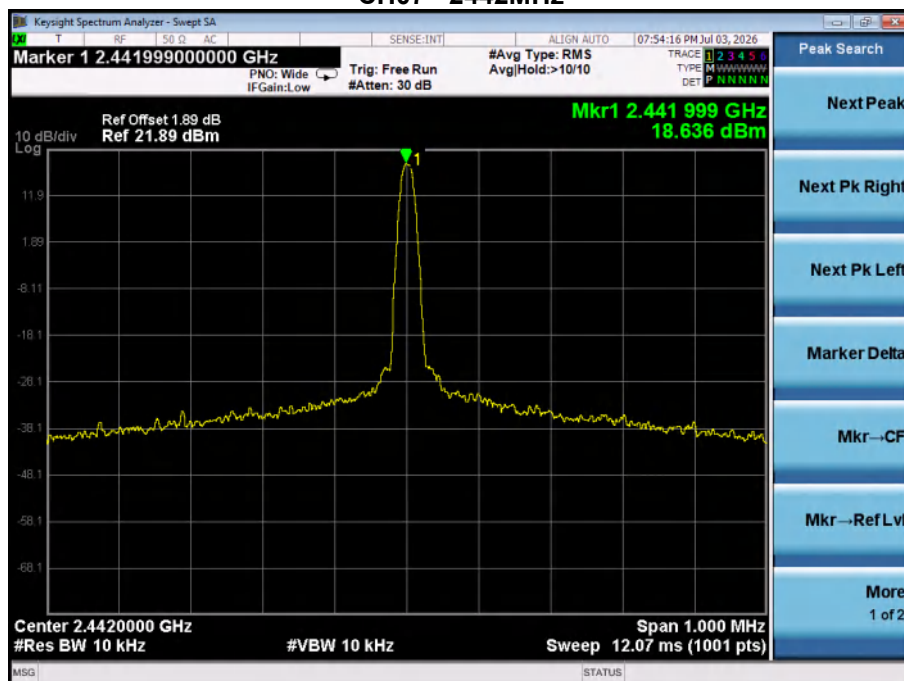


CH13 - 2472MHz

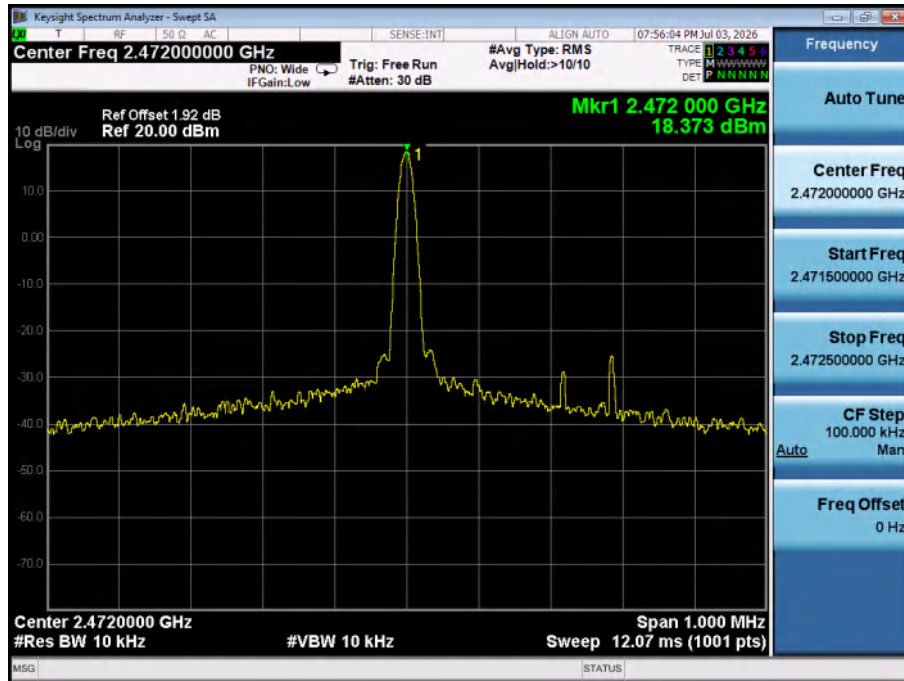

CH03 - 2422MHz

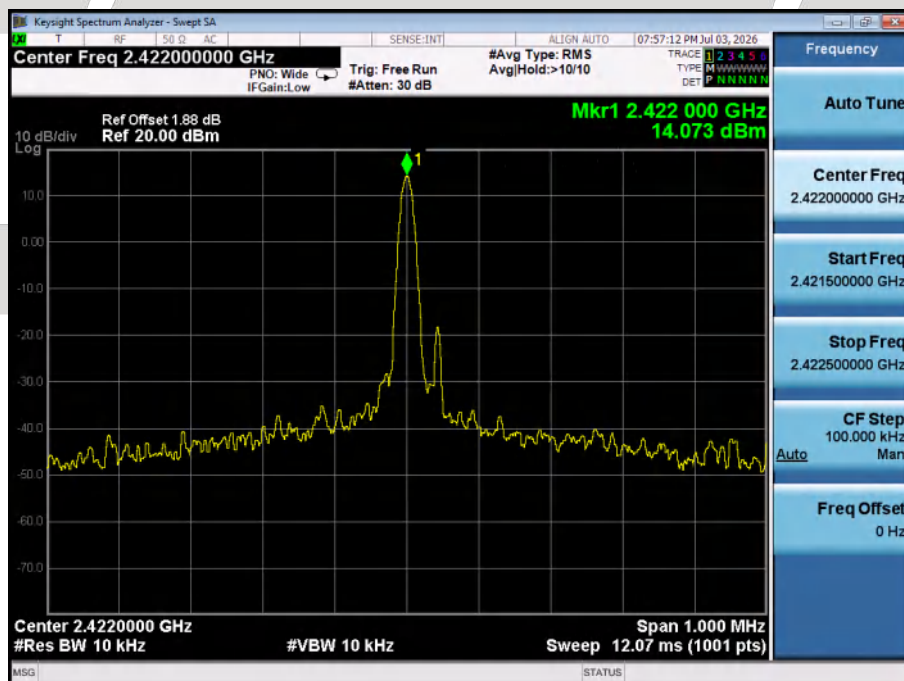

CH11 - 2462MHz

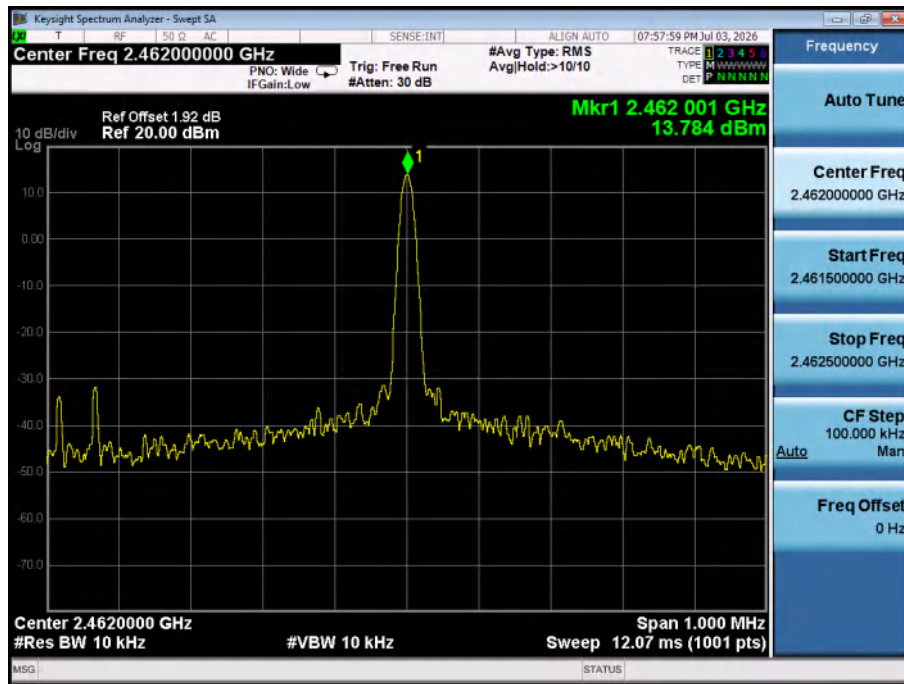

5.2 99% OCCUPIED BANDWIDTH


5.2.1 LIMIT

Item	Limits
Occupied Band Width:	802.11b,g,n(HT20),ax(HE20): 26MHz or less
Spreading Bandwidth:	/
Spread Factor	/

5.2.2 TEST PROCEDURES

1. Setting of SA is following as: RB: 300kHz / VB:300kHz / SPAN: 50MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
2. EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode(For FHSS Device). SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz (For DSSS or OFDM Device) or 83.5MHz (For FHSS Device).
3. SA set to 90% of occupied bandwidth to measure Spread Spectrum Bandwidth and must greater than 500kHz.
4. Spread Spectrum Factor = Spread Spectrum Bandwidth / modulation rate of EUT.
5. Spread Spectrum Factor limit is greater than 5
6. The modulation rate: MR=1.375 for 802.11b, MR=1.5 for 802.11g/n20, MR=3 for 802.11n40.

5.2.3 TEST SETUP LAYOUT

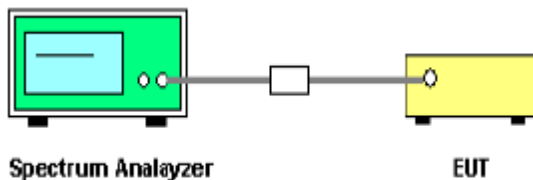

5.2.4 TEST DEVIATION

There is no deviation with the original standard.


5.2.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.


5.2.6 TEST RESULT

Test voltage	Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth Limits (MHz)	Result
Normal	11B	2412	14.003	≤26	Pass
	11B	2442	14.031	≤26	Pass
	11B	2472	13.997	≤26	Pass


CH1-Occupied Bandwidth (99%)-B Mode

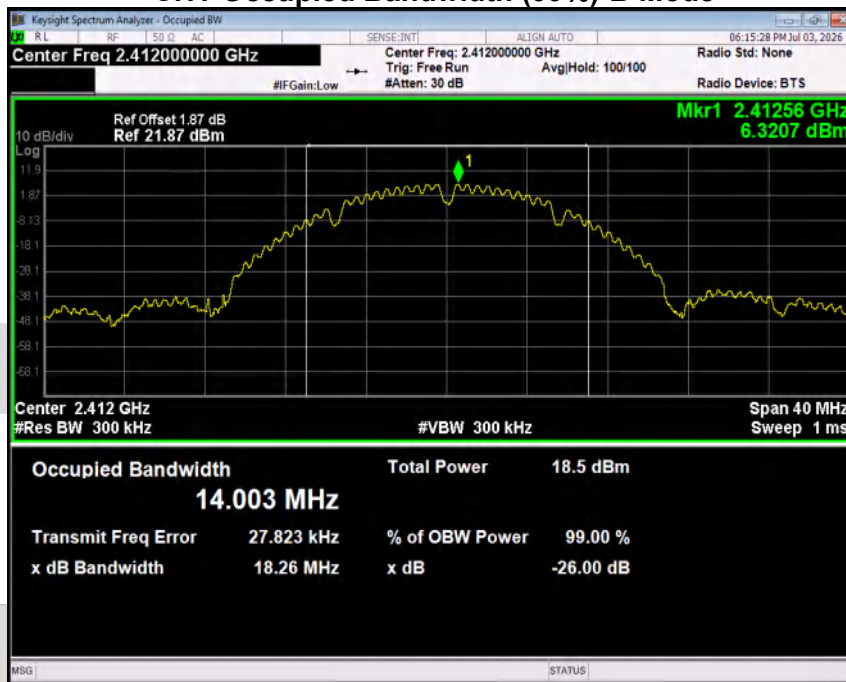

CH7-Occupied Bandwidth (99%)-B Mode

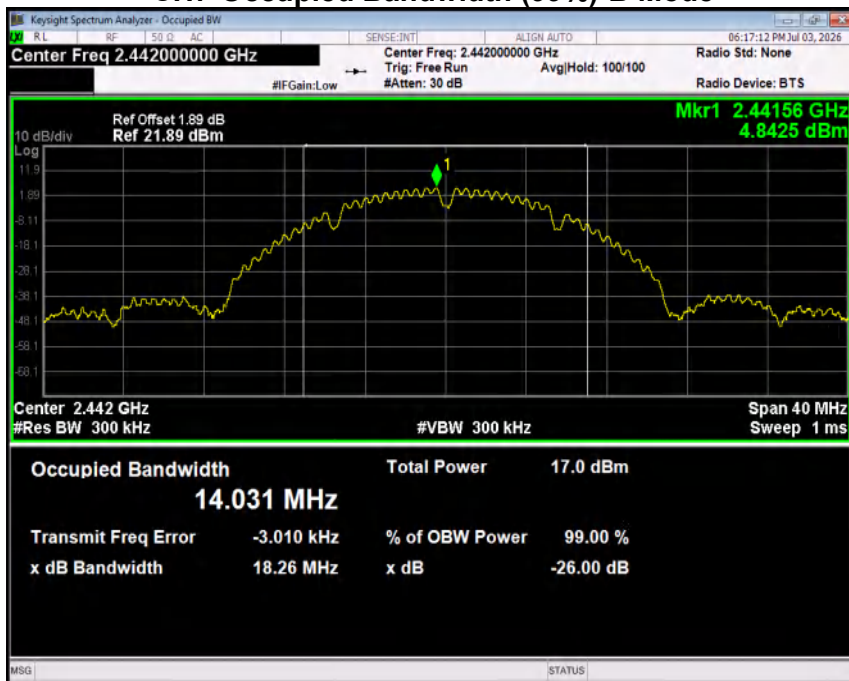

CH13-Occupied Bandwidth (99%)-B Mode

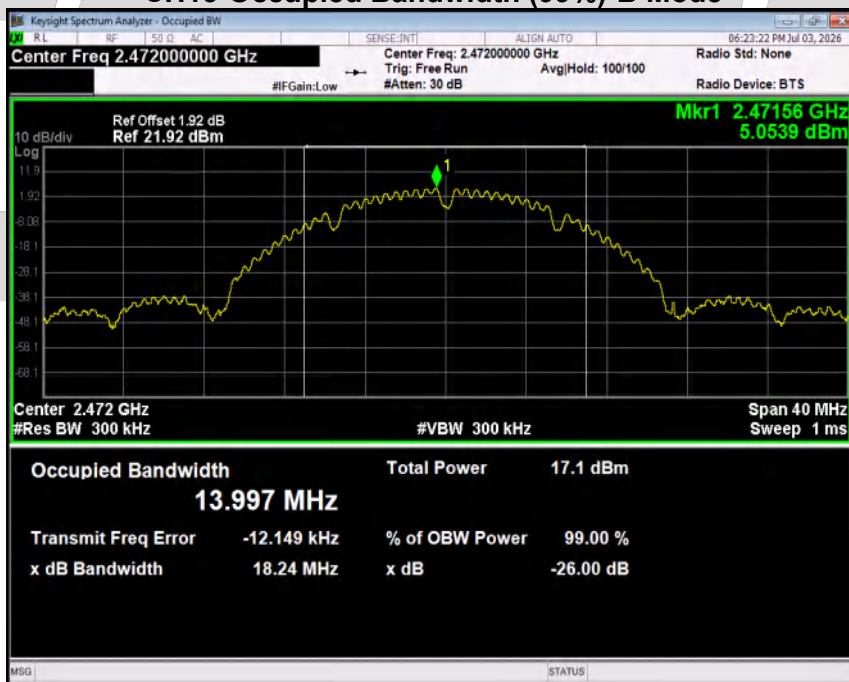


Test voltage	Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth Limits (MHz)	Result
Normal	11G	2412	16.25	≤26	Pass
	11G	2442	16.271	≤26	Pass
	11G	2472	16.24	≤26	Pass

CH1-Occupied Bandwidth (99%)-G Mode



CH7-Occupied Bandwidth (99%)-G Mode

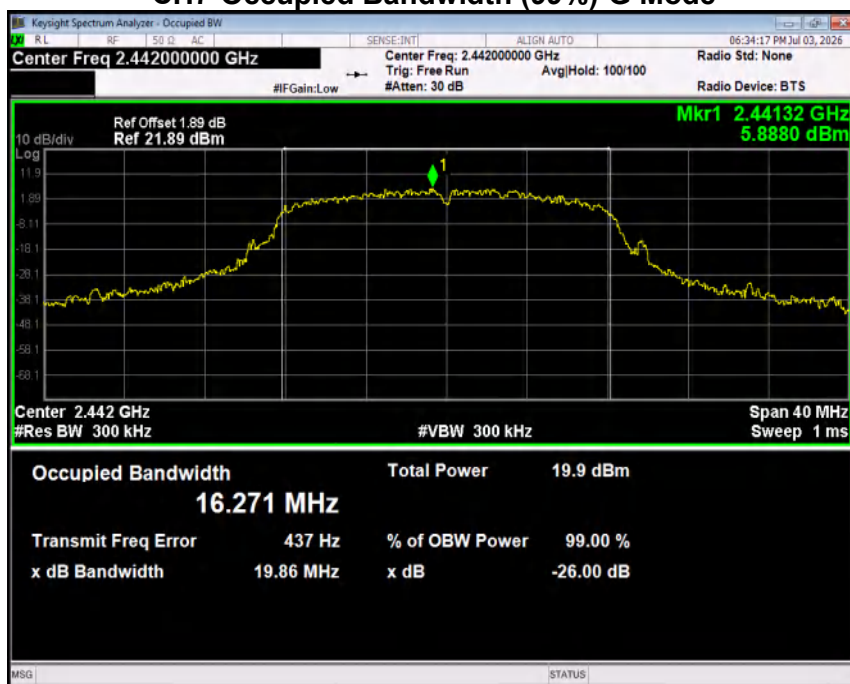

CH13-Occupied Bandwidth (99%)-G Mode




Test voltage	Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth Limits (MHz)	Result
Normal	11N20SISO	2412	17.914	≤26	Pass
	11N20SISO	2442	17.898	≤26	Pass
	11N20SISO	2472	17.879	≤26	Pass


CH1-Occupied Bandwidth (99%)-N20 Mode



CH7-Occupied Bandwidth (99%)-N20 Mode

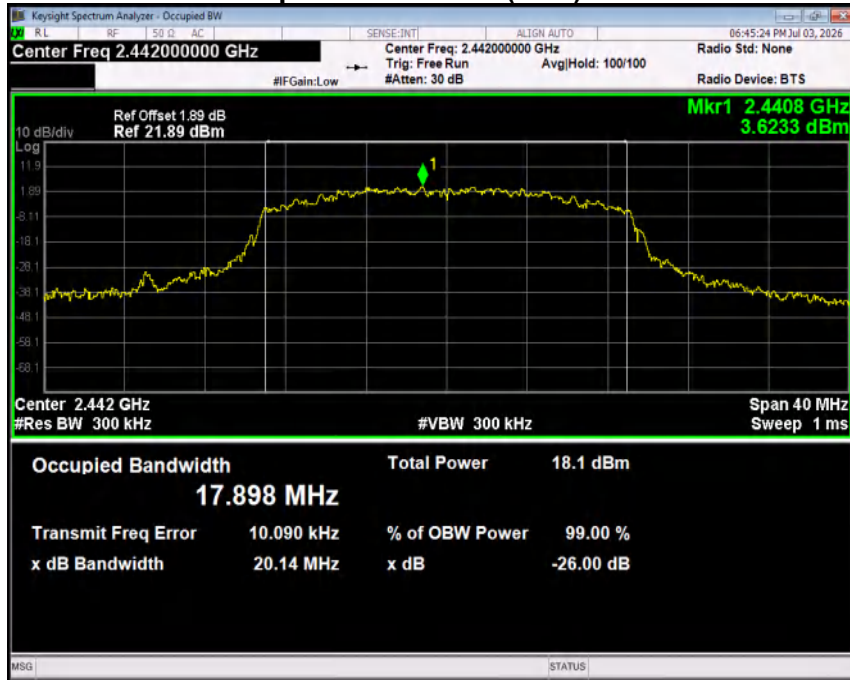


CH13-Occupied Bandwidth (99%)-N20 Mode

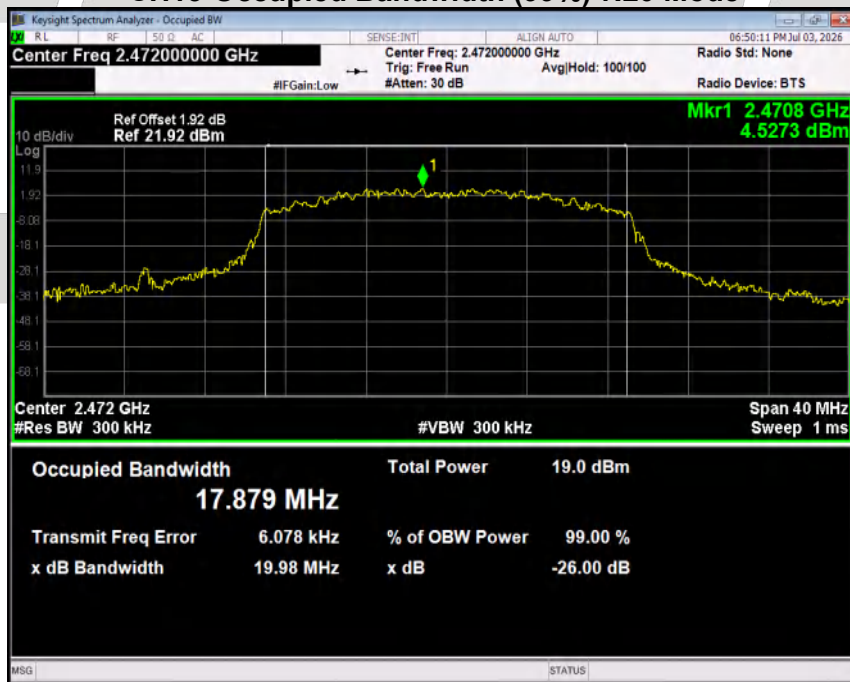


Test voltage	Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth Limits (MHz)	Result
Normal	11N40SISO	2422	34.82	≤40	Pass
	11N40SISO	2442	34.811	≤40	Pass
	11N40SISO	2462	34.749	≤40	Pass


CH1-Occupied Bandwidth (99%)-N40 Mode

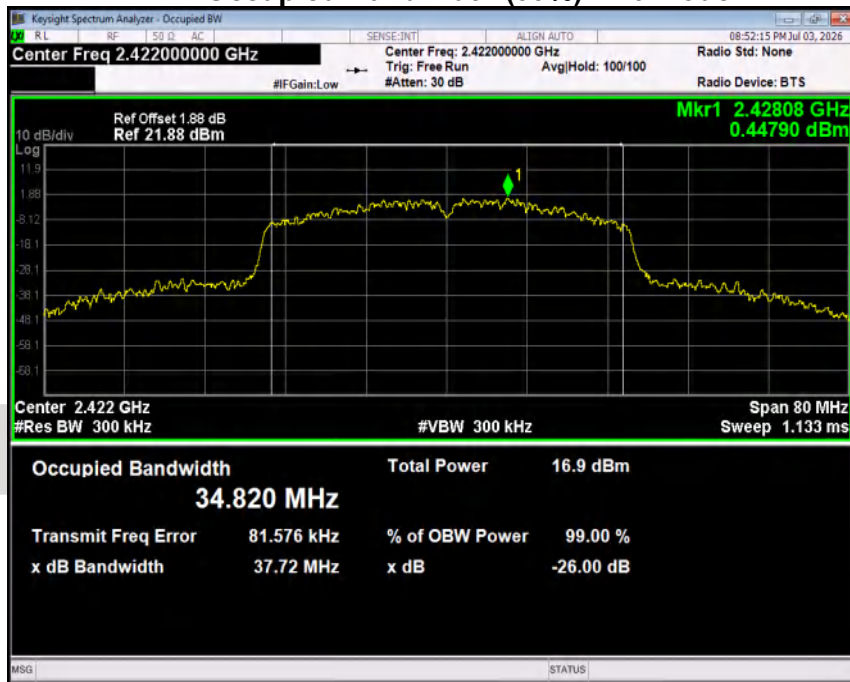

CH7-Occupied Bandwidth (99%)-N40 Mode

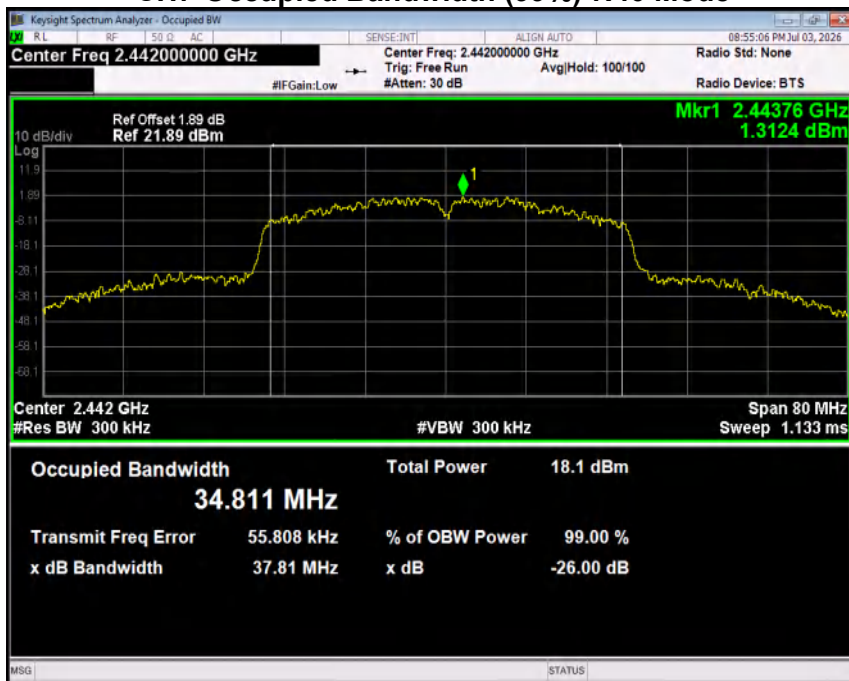


CH13-Occupied Bandwidth (99%)-N40 Mode

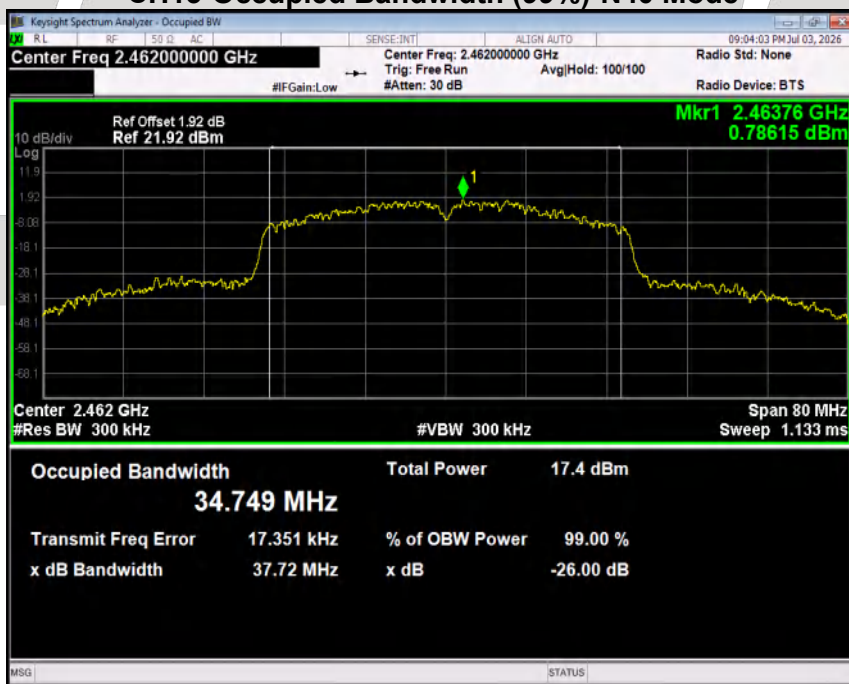


Test voltage	Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth Limits (MHz)	Result
Normal	11AX20SISO	2412	18.474	≤26	Pass
	11AX20SISO	2442	18.387	≤26	Pass
	11AX20SISO	2472	18.438	≤26	Pass


CH1-Occupied Bandwidth (99%)-AX20 Mode

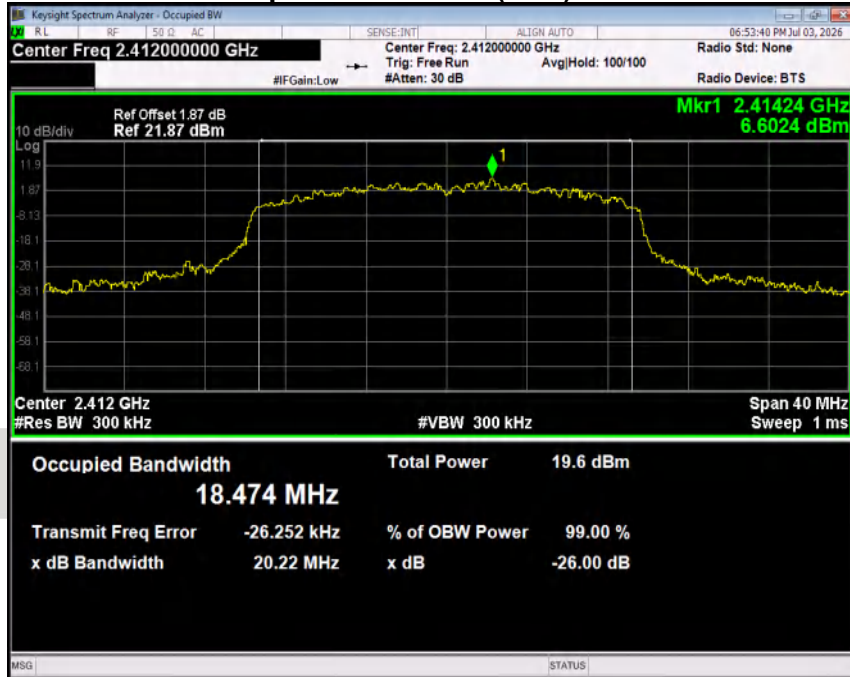


CH7-Occupied Bandwidth (99%)-AX20 Mode

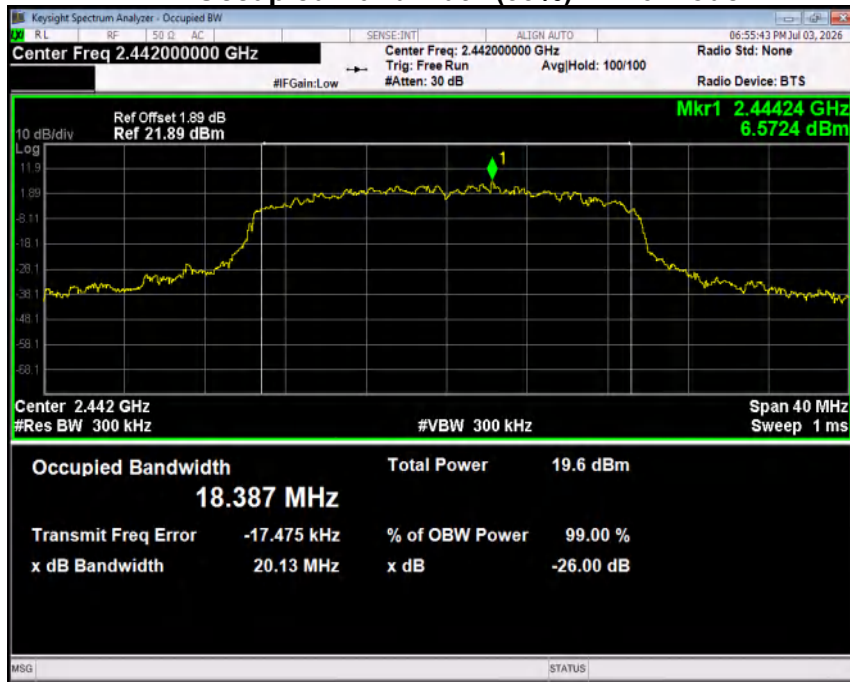


CH13-Occupied Bandwidth (99%)-AX20 Mode

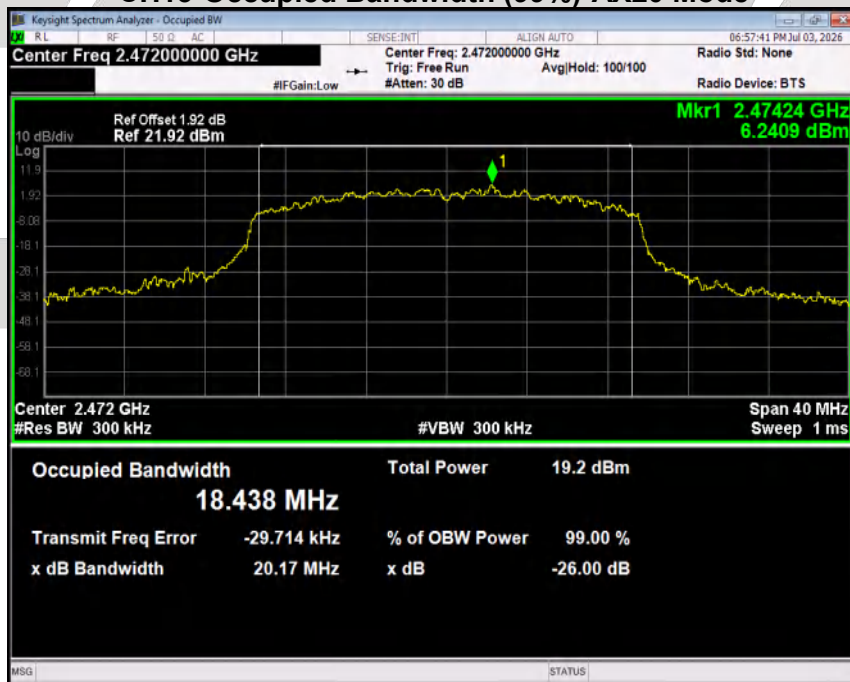


Test voltage	Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth Limits (MHz)	Result
Normal	11AX40SISO	2422	36.126	≤40	Pass
	11AX40SISO	2442	36.083	≤40	Pass
	11AX40SISO	2462	36.006	≤40	Pass

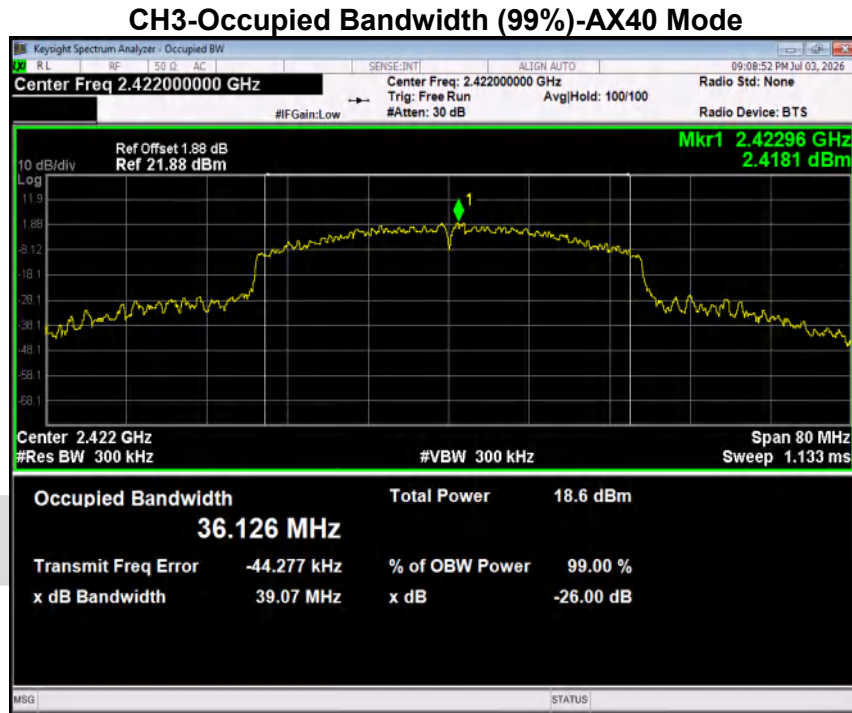

CH7-Occupied Bandwidth (99%)-AX40 Mode

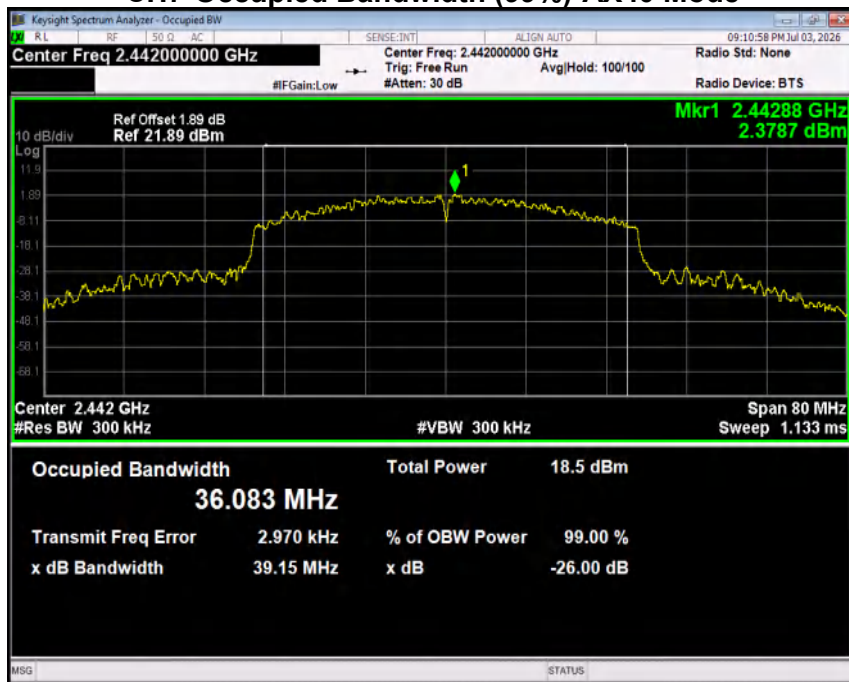

CH11-Occupied Bandwidth (99%)-AX40 Mode

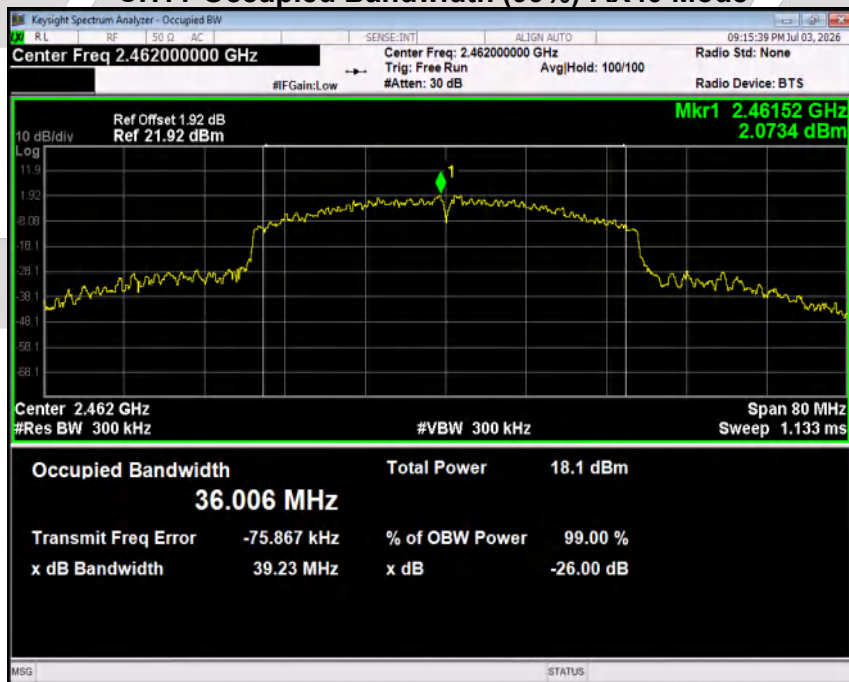

5.3 UNWANTED EMISSION INTENSITY MEASUREMENT

5.3.1 LIMIT

Item	Limits
TX Spurious Emission	Below 1G: 2.5μW or less Below 2387 MHz: 2.5μW/MHz or less 2387 to 2400 MHz: 25μW/MHz or less 2483.5 through 2496.5 MHz: 25μW/MHz or less Over 2496.5 MHz: 2.5μW/MHz or less

5.3.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3.3 TEST PROCEDURES

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: Below 1GHz RB:100KHz / VB:100KHz
Above 1GHz RB:1MHz / VB:1MHz / AT: 10dB Ref: 0dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold
3. Setting of SA is following as 30MHz and stop frequency 1000MHz Then to mark peak reading value + cable loss shall be less than 2.5μW/MHz.
4. Setting of SA is following as 1000MHz and stop frequency 2387MHz Then to mark peak reading value + cable loss shall be less than 2.5μW/MHz.
5. SA adjusted to start frequency 2387MHz and stop frequency 2400MHz. Then to mark peak reading value + cable loss shall be less than 25μW/MHz.
6. SA adjusted to start frequency 2483.5MHz and stop frequency 2496.5MHz Then to mark peak reading value + cable loss shall be less than 25μW/MHz.
7. SA adjusted to start frequency 2496.5MHz and stop frequency 12500MHz Then to mark peak reading value + cable loss shall be less than 2.5μW/MHz
8. Measure side band spurious as follows: For 2.4GHz band: 2374MHz~2400MHz and 2483.5MHz~2509.5MHz RBW = VBW = 30kHz, Result_Value = Measured_Value + 15.2 [dBm]
9. If the Result_Value is over the requirement, take total sum of 1MHz band centered at the spur frequency like ACLP measurement as Result_Value.

5.3.4 TEST SETUP LAYOUT

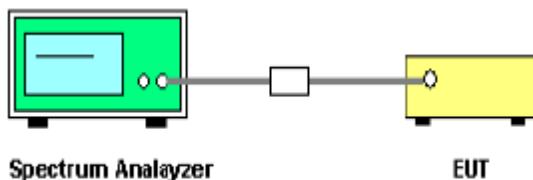

5.3.5 TEST DEVIATION

There is no deviation with the original standard.

5.3.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

5.3.7 TEST RESULT



Test Voltage	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Max Value (μW/MHz)	Limit (μW/MHz)	Verdict
Normal	802.11b	2412	30-1000	480.08	-54.81	0.0033	2.5	Pass
Normal	802.11b	2412	1000-2387	2387	-41.11	0.0774	2.5	Pass
Normal	802.11b	2412	2387-2400	2399.84	-31.76	0.6668	25	Pass
Normal	802.11b	2412	2483.5-2496.5	2486.31	-47.06	0.0197	25	Pass
Normal	802.11b	2412	2496.5-13000	2570.02	-47.55	0.0176	2.5	Pass
Normal	802.11b	2442	30-1000	480.08	-55.32	0.0029	2.5	Pass
Normal	802.11b	2442	1000-2387	2356.49	-46.87	0.0206	2.5	Pass
Normal	802.11b	2442	2387-2400	2399.99	-44.92	0.0322	25	Pass
Normal	802.11b	2442	2483.5-2496.5	2496.49	-46.34	0.0232	25	Pass
Normal	802.11b	2442	2496.5-13000	2496.5	-47.57	0.0175	2.5	Pass
Normal	802.11b	2472	30-1000	480.08	-55.57	0.0028	2.5	Pass
Normal	802.11b	2472	1000-2387	2385.61	-46.03	0.0249	2.5	Pass
Normal	802.11b	2472	2387-2400	2388.43	-44.77	0.0333	25	Pass
Normal	802.11b	2472	2483.5-2496.5	2487.04	-33.18	0.4808	25	Pass
Normal	802.11b	2472	2496.5-13000	2496.5	-39.65	0.1084	2.5	Pass
Normal	802.11g	2412	30-1000	480.08	-55.2	0.0030	2.5	Pass
Normal	802.11g	2412	1000-2387	2387	-38.9	0.1288	2.5	Pass
Normal	802.11g	2412	2387-2400	2399.99	-18.16	15.2757	25	Pass
Normal	802.11g	2412	2483.5-2496.5	2483.72	-47.08	0.0196	25	Pass
Normal	802.11g	2412	2496.5-13000	2570.02	-47.88	0.0163	2.5	Pass
Normal	802.11g	2442	30-1000	480.08	-54.01	0.0040	2.5	Pass
Normal	802.11g	2442	1000-2387	2387	-43.93	0.0405	2.5	Pass
Normal	802.11g	2442	2387-2400	2391.19	-42.92	0.0511	25	Pass
Normal	802.11g	2442	2483.5-2496.5	2484.24	-43.85	0.0412	25	Pass
Normal	802.11g	2442	2496.5-13000	2496.5	-46.61	0.0218	2.5	Pass
Normal	802.11g	2472	30-1000	480.08	-55.29	0.0030	2.5	Pass
Normal	802.11g	2472	1000-2387	2312.1	-45.2	0.0302	2.5	Pass
Normal	802.11g	2472	2387-2400	2387.69	-44.55	0.0351	25	Pass
Normal	802.11g	2472	2483.5-2496.5	2483.53	-19.06	12.4165	25	Pass
Normal	802.11g	2472	2496.5-13000	2496.5	-29.7	1.0715	2.5	Pass
Normal	802.11n20	2412	30-1000	480.08	-55.05	0.0031	2.5	Pass
Normal	802.11n20	2412	1000-2387	2385.61	-40.06	0.0986	2.5	Pass
Normal	802.11n20	2412	2387-2400	2399.95	-19.26	11.8577	25	Pass
Normal	802.11n20	2412	2483.5-2496.5	2490.81	-47.75	0.0168	25	Pass
Normal	802.11n20	2412	2496.5-13000	2496.5	-47.77	0.0167	2.5	Pass
Normal	802.11n20	2442	30-1000	480.08	-55.22	0.0030	2.5	Pass
Normal	802.11n20	2442	1000-2387	2384.23	-45.7	0.0269	2.5	Pass
Normal	802.11n20	2442	2387-2400	2388.38	-45.44	0.0286	25	Pass
Normal	802.11n20	2442	2483.5-2496.5	2495.2	-46.18	0.0241	25	Pass
Normal	802.11n20	2442	2496.5-13000	2517.51	-47.74	0.0168	2.5	Pass
Normal	802.11n20	2472	30-1000	480.08	-55.03	0.0031	2.5	Pass
Normal	802.11n20	2472	1000-2387	2313.49	-46.49	0.0224	2.5	Pass
Normal	802.11n20	2472	2387-2400	2392.29	-44.2	0.0380	25	Pass
Normal	802.11n20	2472	2483.5-2496.5	2483.51	-18.07	15.5955	25	Pass
Normal	802.11n20	2472	2496.5-13000	2496.5	-30.49	0.8933	2.5	Pass

Test Voltage	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Max Value (μW/MHz)	Limit (μW/MHz)	Verdict
Normal	802.11n40	2422	30-1000	480.08	-55.76	0.0027	2.5	Pass
Normal	802.11n40	2422	1000-2387	2385.61	-31.33	0.7362	2.5	Pass
Normal	802.11n40	2422	2387-2400	2395.53	-25.55	2.7861	25	Pass
Normal	802.11n40	2422	2483.5-2496.5	2492.38	-46.24	0.0238	25	Pass
Normal	802.11n40	2422	2496.5-13000	2570.02	-47.04	0.0198	2.5	Pass
Normal	802.11n40	2442	30-1000	480.08	-55.18	0.0030	2.5	Pass
Normal	802.11n40	2442	1000-2387	2385.61	-44.76	0.0334	2.5	Pass
Normal	802.11n40	2442	2387-2400	2400	-39.28	0.1180	25	Pass
Normal	802.11n40	2442	2483.5-2496.5	2485.29	-38.63	0.1371	25	Pass
Normal	802.11n40	2442	2496.5-13000	2496.5	-42.94	0.0508	2.5	Pass
Normal	802.11n40	2462	30-1000	480.08	-55.39	0.0029	2.5	Pass
Normal	802.11n40	2462	1000-2387	2302.39	-44.87	0.0326	2.5	Pass
Normal	802.11n40	2462	2387-2400	2394.93	-44.29	0.0372	25	Pass
Normal	802.11n40	2462	2483.5-2496.5	2485.26	-24.16	3.8371	25	Pass
Normal	802.11n40	2462	2496.5-13000	2496.5	-29.49	1.1246	2.5	Pass
Normal	802.11ax20	2412	30-1000	480.08	-55.11	0.0031	2.5	Pass
Normal	802.11ax20	2412	1000-2387	2387	-39.34	0.1164	2.5	Pass
Normal	802.11ax20	2412	2387-2400	2399.91	-19.37	11.5611	25	Pass
Normal	802.11ax20	2412	2483.5-2496.5	2492.25	-47.88	0.0163	25	Pass
Normal	802.11ax20	2412	2496.5-13000	2507	-47.16	0.0192	2.5	Pass
Normal	802.11ax20	2442	30-1000	480.08	-55.56	0.0028	2.5	Pass
Normal	802.11ax20	2442	1000-2387	2282.98	-45.53	0.0280	2.5	Pass
Normal	802.11ax20	2442	2387-2400	2396.66	-43.9	0.0407	25	Pass
Normal	802.11ax20	2442	2483.5-2496.5	2494.95	-46.58	0.0220	25	Pass
Normal	802.11ax20	2442	2496.5-13000	2496.5	-47.89	0.0163	2.5	Pass
Normal	802.11ax20	2472	30-1000	480.08	-56.05	0.0025	2.5	Pass
Normal	802.11ax20	2472	1000-2387	2312.1	-45.9	0.0257	2.5	Pass
Normal	802.11ax20	2472	2387-2400	2396.05	-44.2	0.0380	25	Pass
Normal	802.11ax20	2472	2483.5-2496.5	2483.54	-18.76	13.3045	25	Pass
Normal	802.11ax20	2472	2496.5-13000	2496.5	-30.22	0.9506	2.5	Pass
Normal	802.11ax40	2422	30-1000	480.08	-55.19	0.0030	2.5	Pass
Normal	802.11ax40	2422	1000-2387	2387	-30.02	0.9954	2.5	Pass
Normal	802.11ax40	2422	2387-2400	2399.53	-21.26	7.4817	25	Pass
Normal	802.11ax40	2422	2483.5-2496.5	2484.42	-44.43	0.0361	25	Pass
Normal	802.11ax40	2422	2496.5-13000	2559.52	-46.97	0.0201	2.5	Pass
Normal	802.11ax40	2442	30-1000	480.08	-55.12	0.0031	2.5	Pass
Normal	802.11ax40	2442	1000-2387	2381.45	-44.37	0.0366	2.5	Pass
Normal	802.11ax40	2442	2387-2400	2399.9	-37.32	0.1854	25	Pass
Normal	802.11ax40	2442	2483.5-2496.5	2484.63	-37.85	0.1641	25	Pass
Normal	802.11ax40	2442	2496.5-13000	2496.5	-41.97	0.0635	2.5	Pass
Normal	802.11ax40	2462	30-1000	480.08	-54.15	0.0038	2.5	Pass
Normal	802.11ax40	2462	1000-2387	2302.39	-45.05	0.0313	2.5	Pass
Normal	802.11ax40	2462	2387-2400	2393.44	-45.28	0.0296	25	Pass
Normal	802.11ax40	2462	2483.5-2496.5	2483.51	-26.97	2.0091	25	Pass
Normal	802.11ax40	2462	2496.5-13000	2496.5	-33.43	0.4539	2.5	Pass


Note: 30M-1GHz test for RB=100kHz,
Test Result = Max Value +RB factor
RB factor = $10\log(RB_0/RB_1) = 10\log(1M/100K) = 10dB$

Modulation type: 802.11b


Test voltage	Normal	Test Channel (MHz)	2412.00
--------------	--------	--------------------	---------

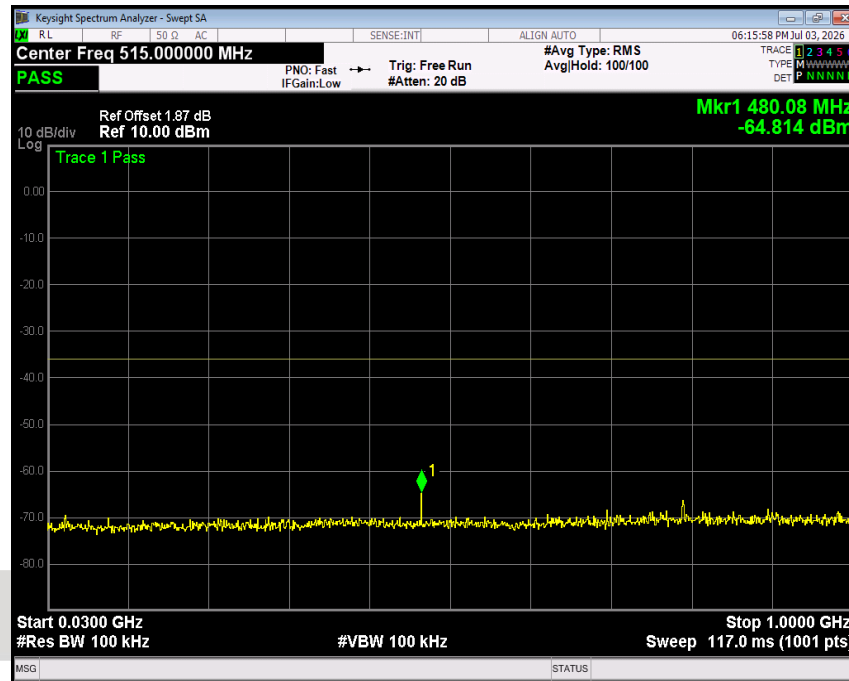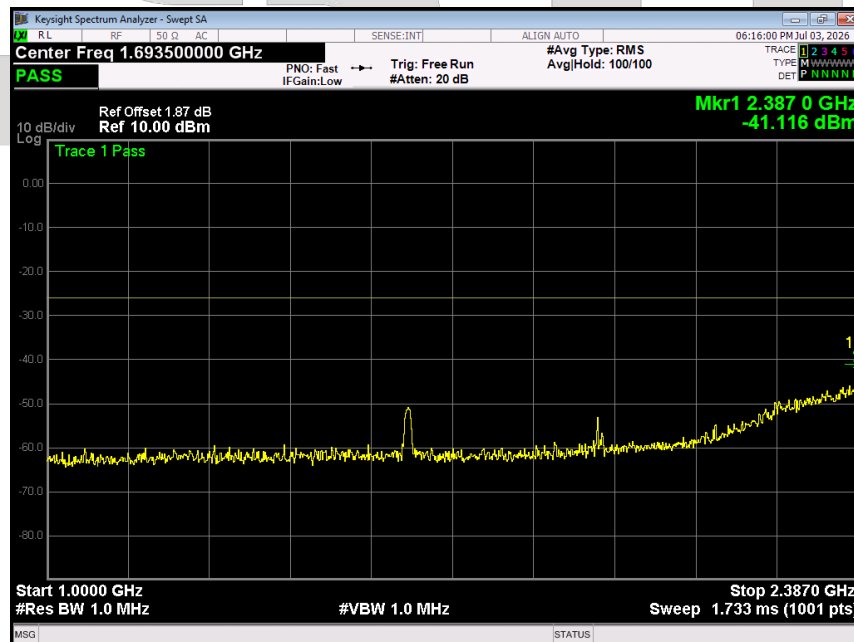 $30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

 $1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

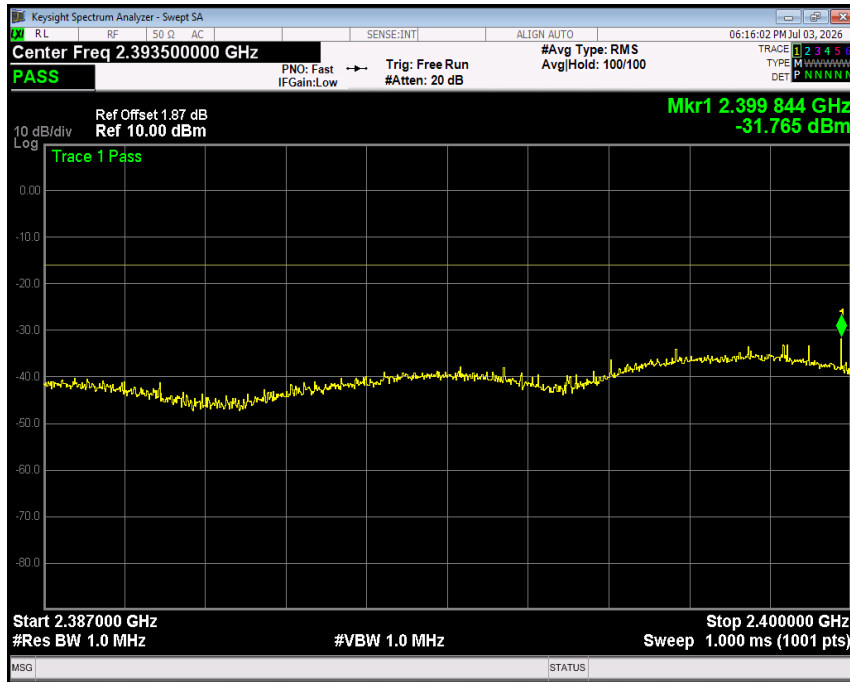
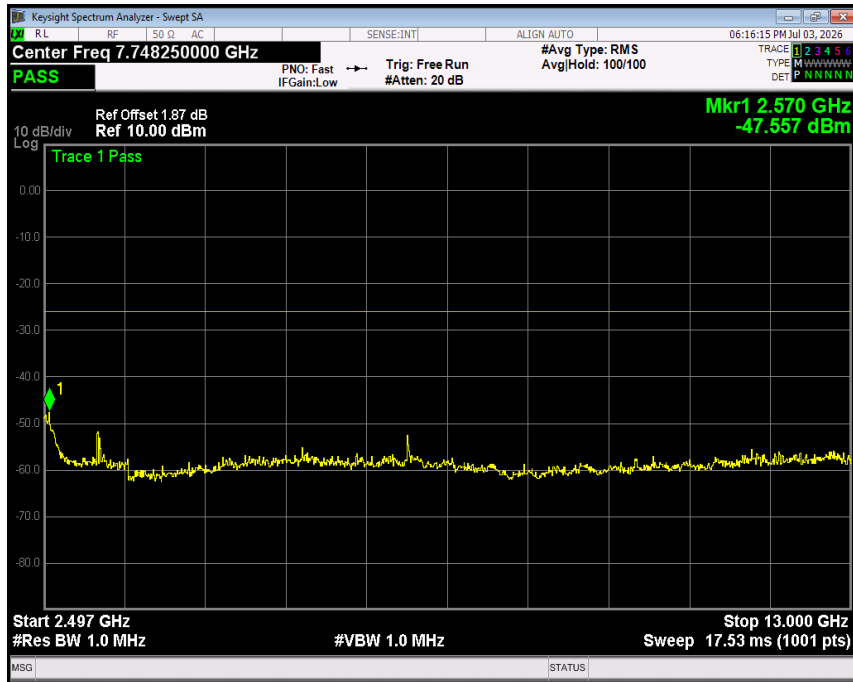
2387 MHz < f ≤ 2400 MHz

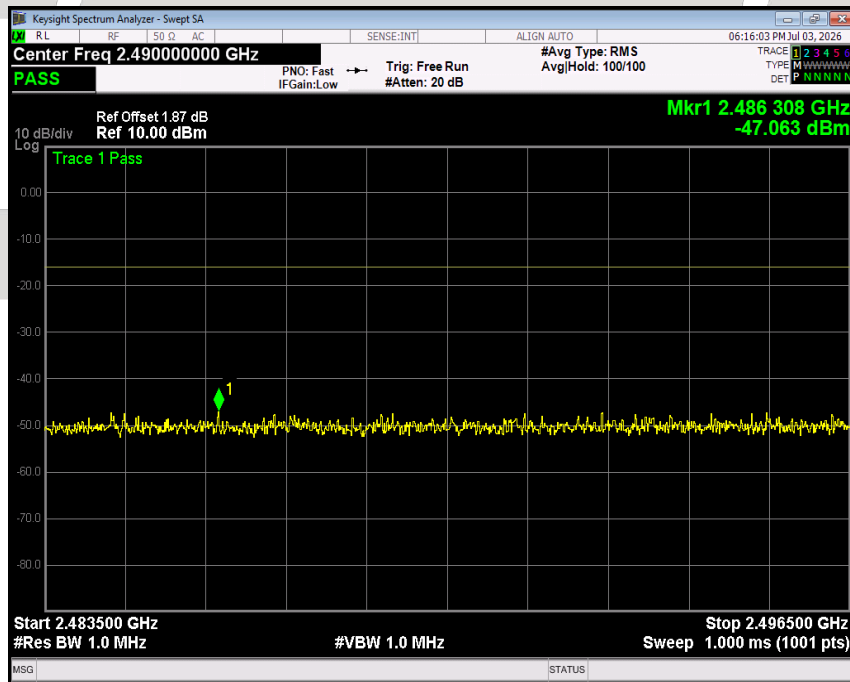

2483.5 MHz ≤ f < 2496.5 MHz




$2496.5 \text{ MHz} \leq f < 13 \text{ GHz}$




Test voltage	Normal	Test Channel (MHz)	2442.00
--------------	--------	--------------------	---------


$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

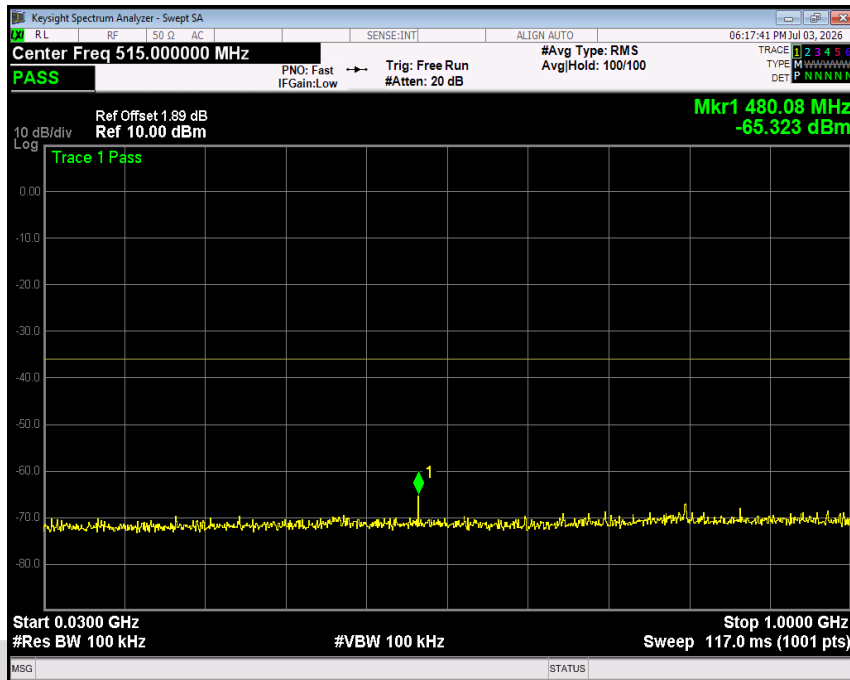


$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

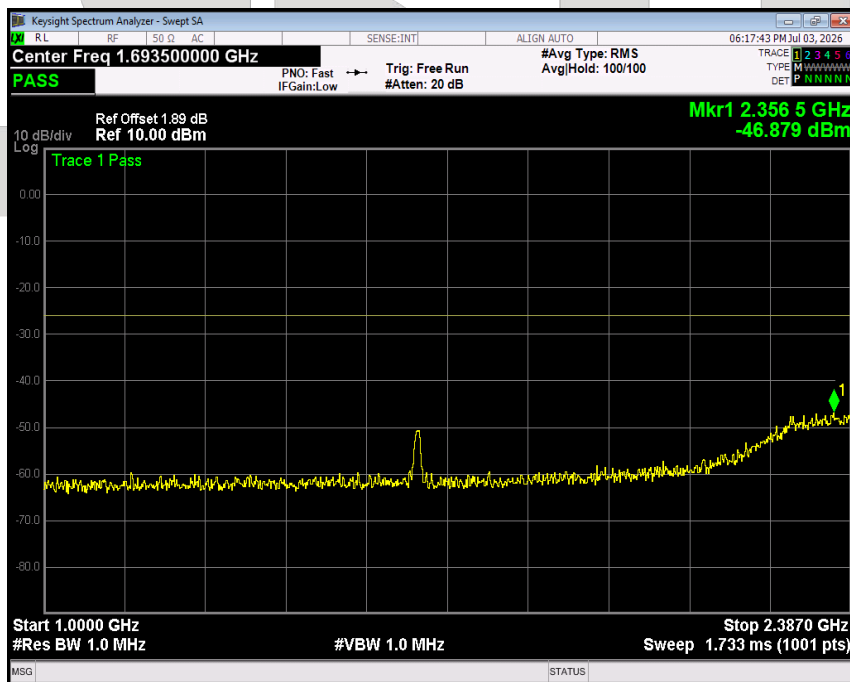


2387 MHz < f ≤ 2400 MHz

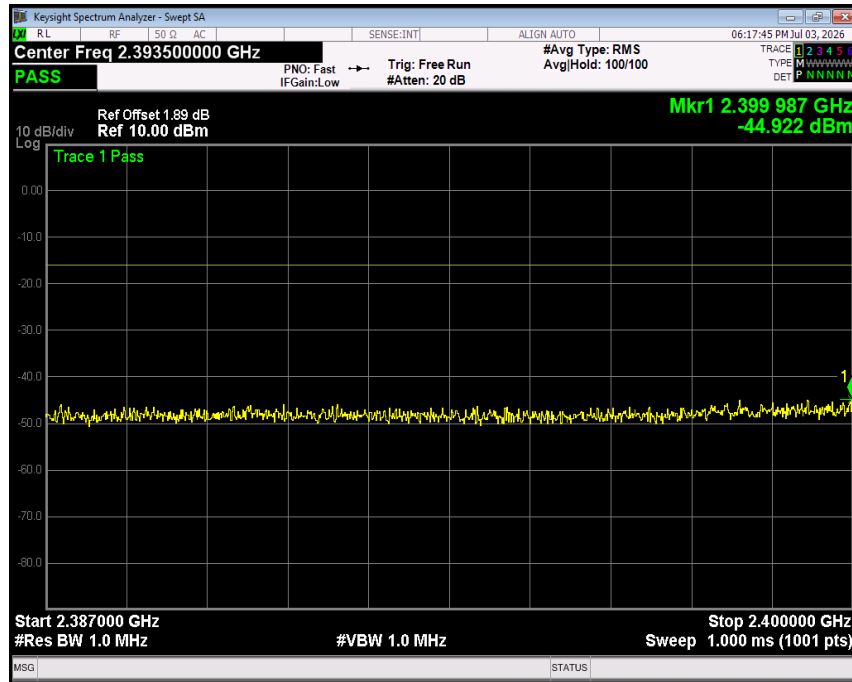

2483.5 MHz ≤ f < 2496.5 MHz

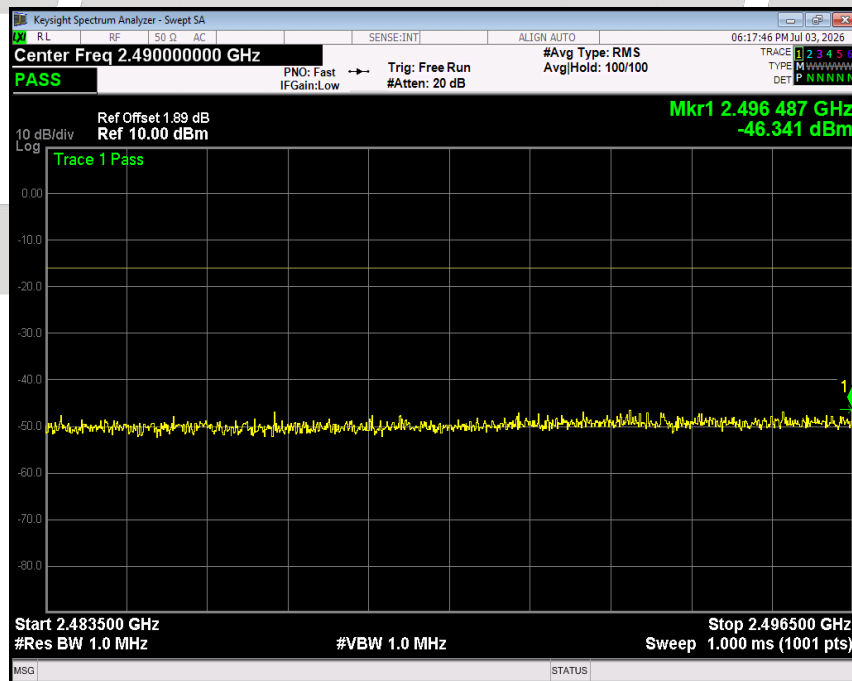


$2496.5 \text{ MHz} \leq f < 13 \text{ GHz}$

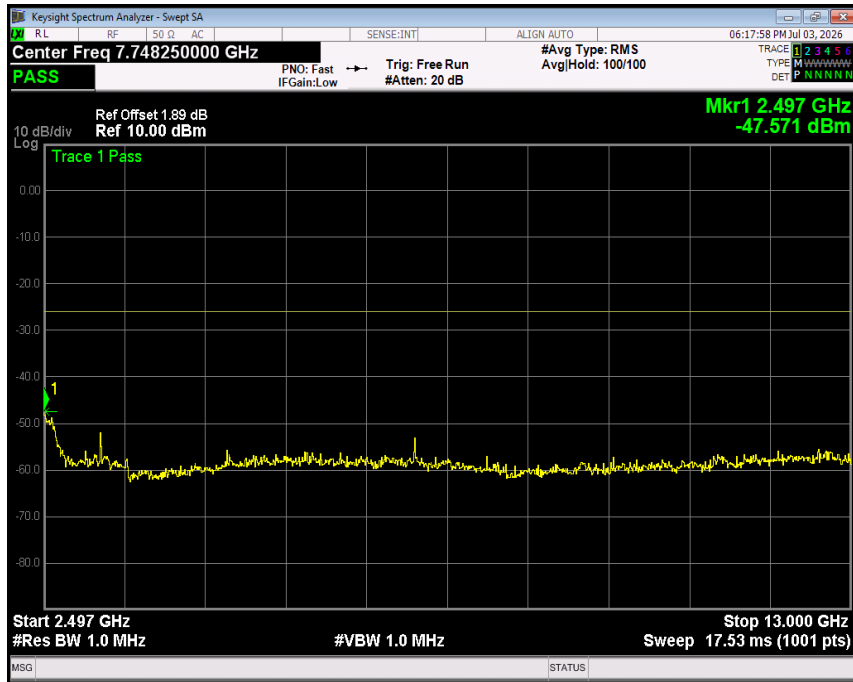


CSTC

Test voltage	Normal	Test Channel (MHz)	2472.00
--------------	--------	--------------------	---------


$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

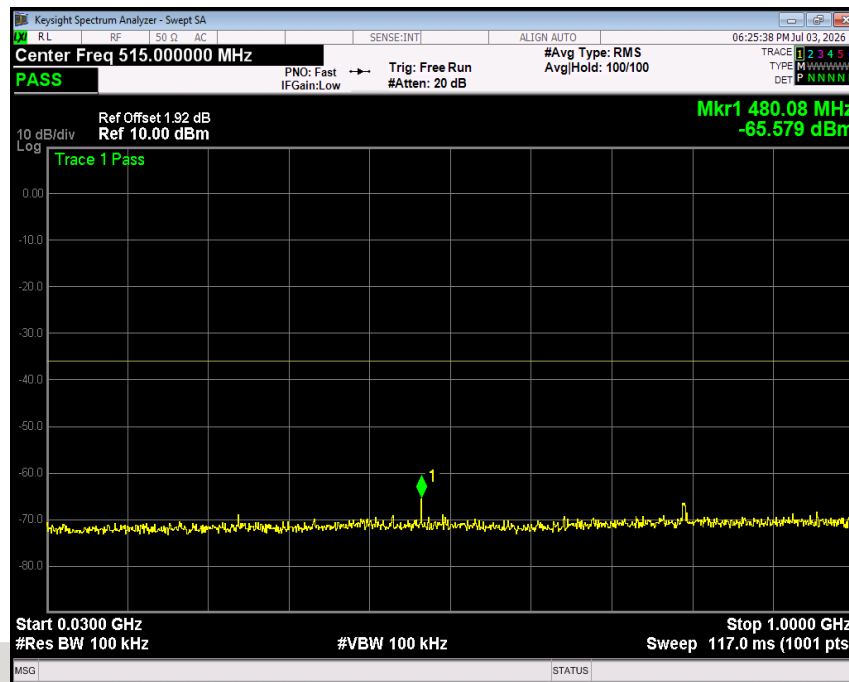


$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

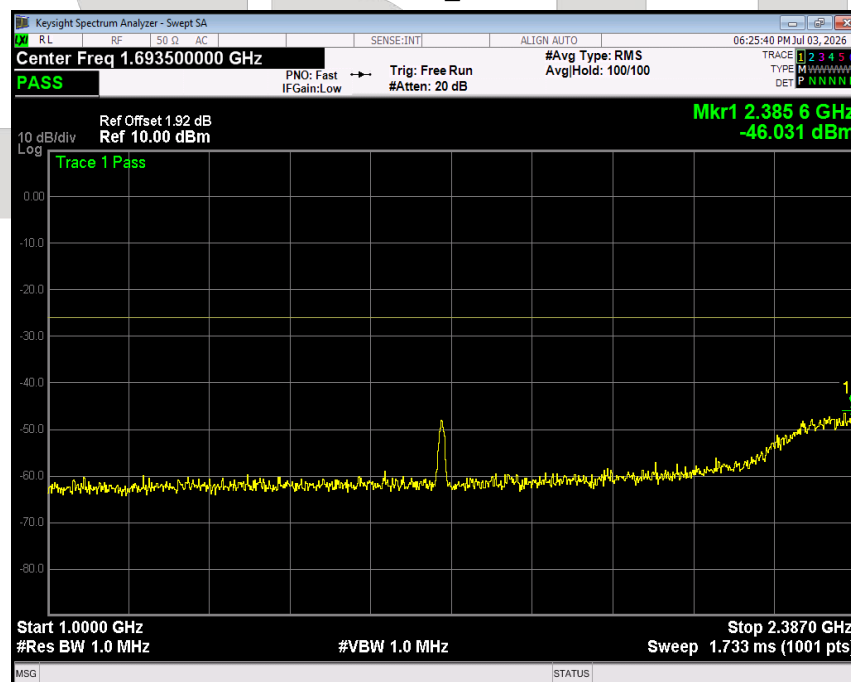


2387 MHz < f ≤ 2400 MHz

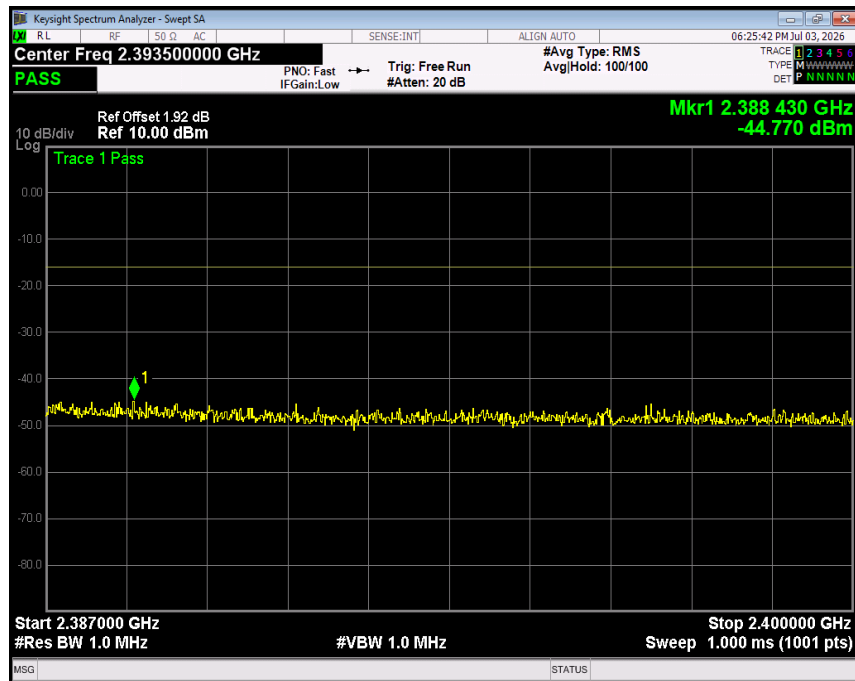

2483.5 MHz ≤ f < 2496.5 MHz

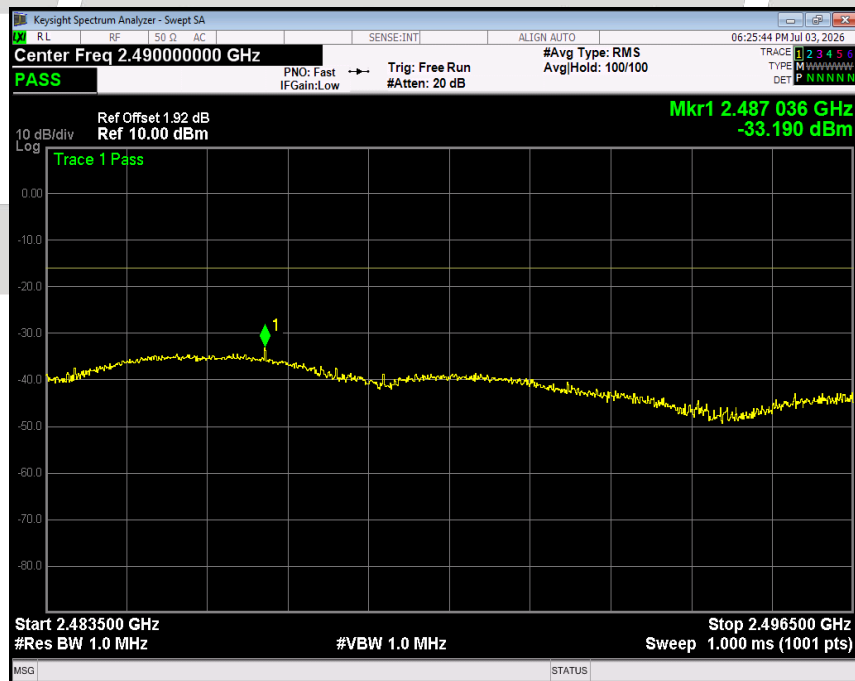



$2496.5 \text{ MHz} \leq f < 13 \text{ GHz}$


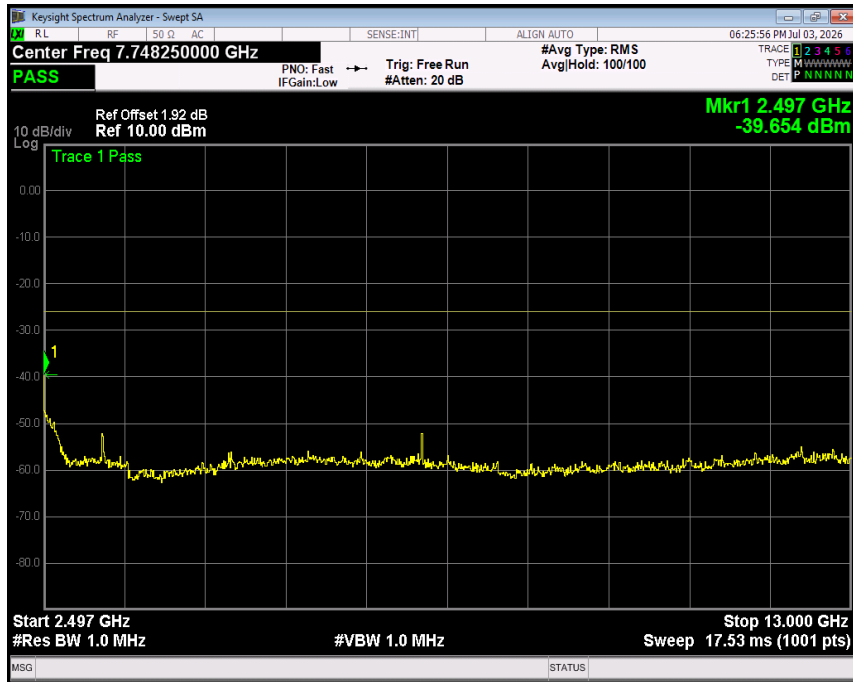


CSTC


Modulation type: 802.11g

Test voltage	Normal	Test Channel (MHz)	2412.00
--------------	--------	--------------------	---------

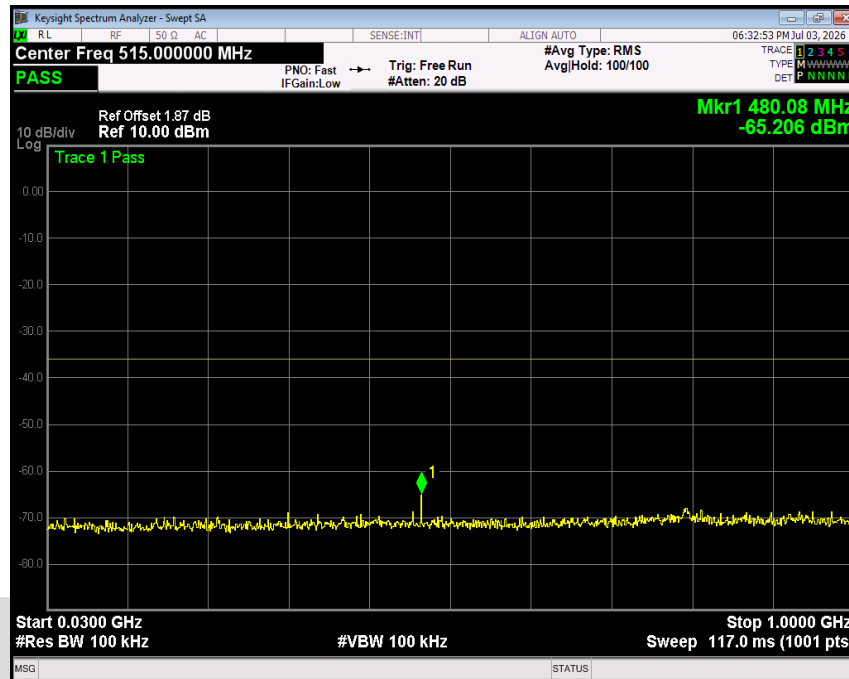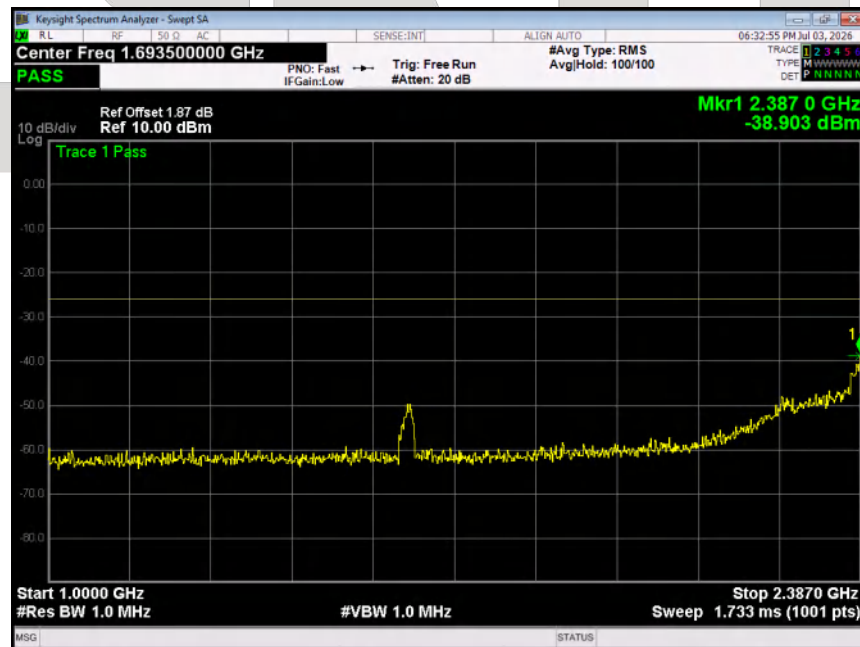
 $30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

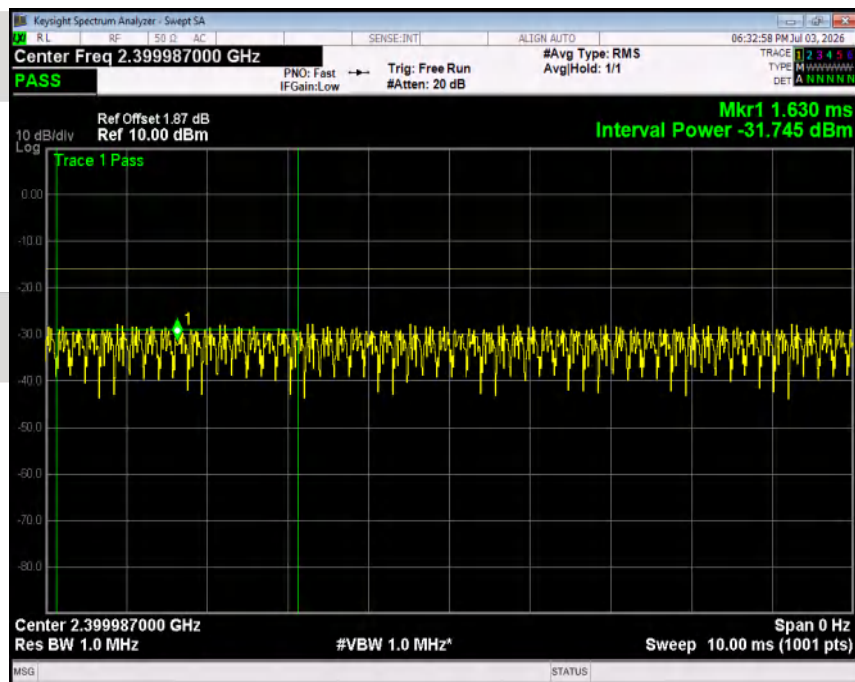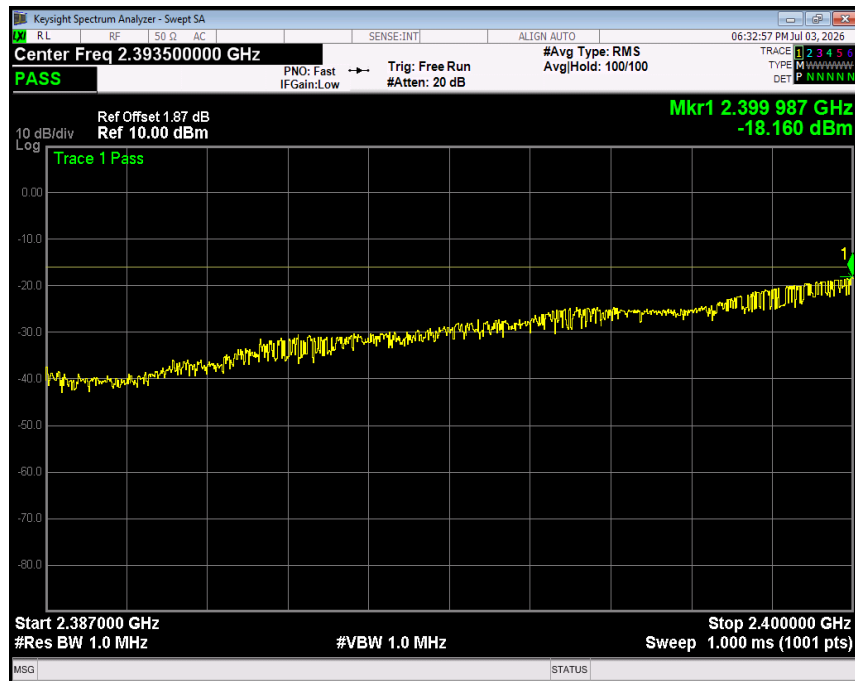 $1000 \text{ MHz} < f \leq 2387 \text{ MHz}$


$2387 \text{ MHz} < f \leq 2400 \text{ MHz}$ 

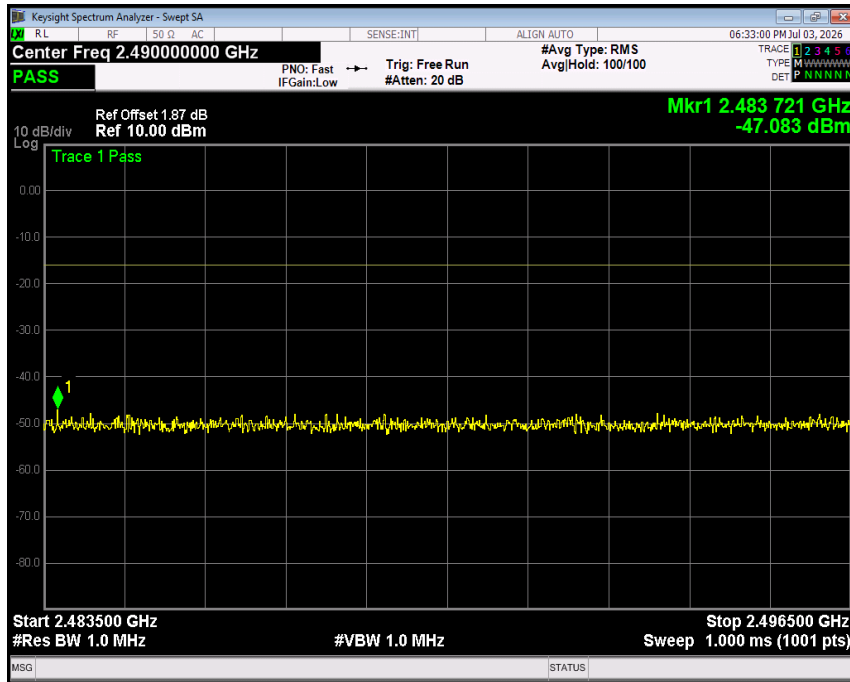$2483.5 \text{ MHz} \leq f < 2496.5 \text{ MHz}$

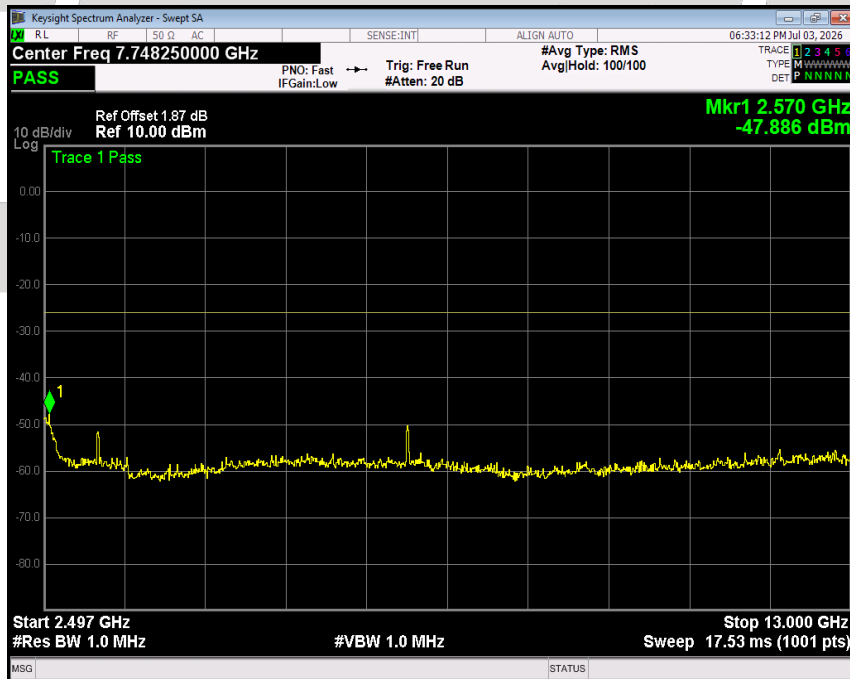


$2496.5 \text{ MHz} \leq f < 12.5 \text{ GHz}$




Test voltage	Normal	Test Channel (MHz)	2442.00
--------------	--------	--------------------	---------


$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

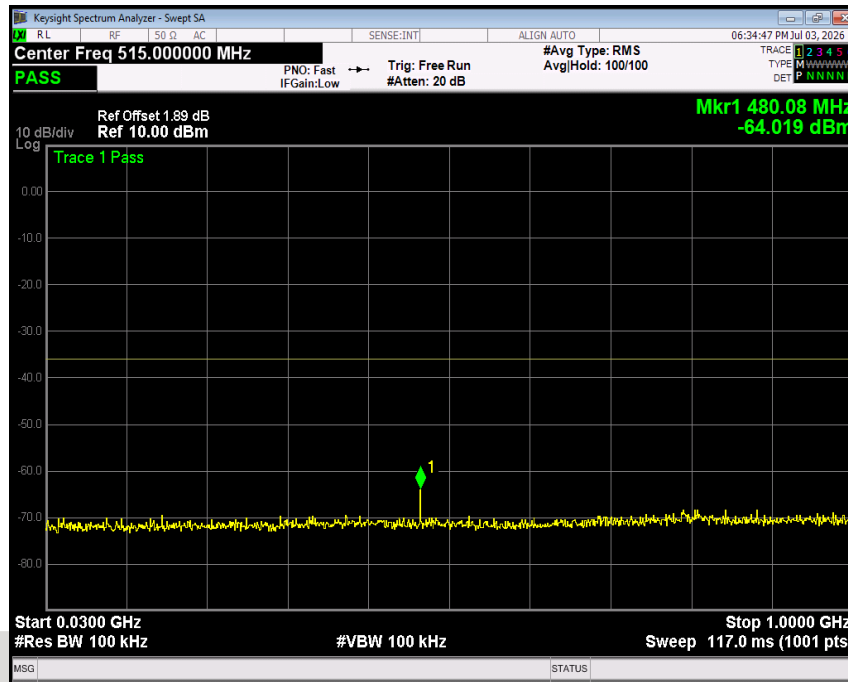


$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

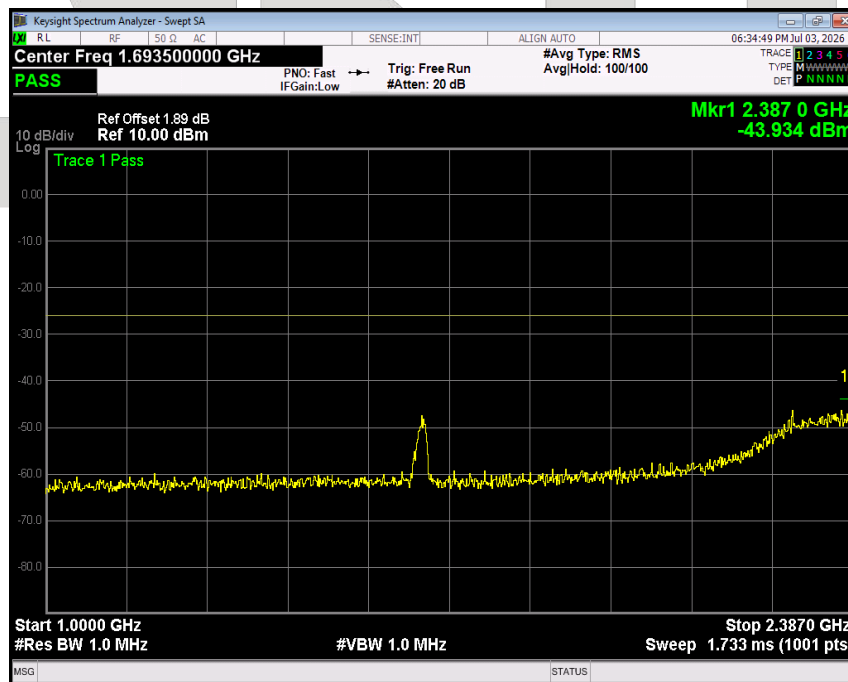


2387 MHz < f ≤ 2400 MHz

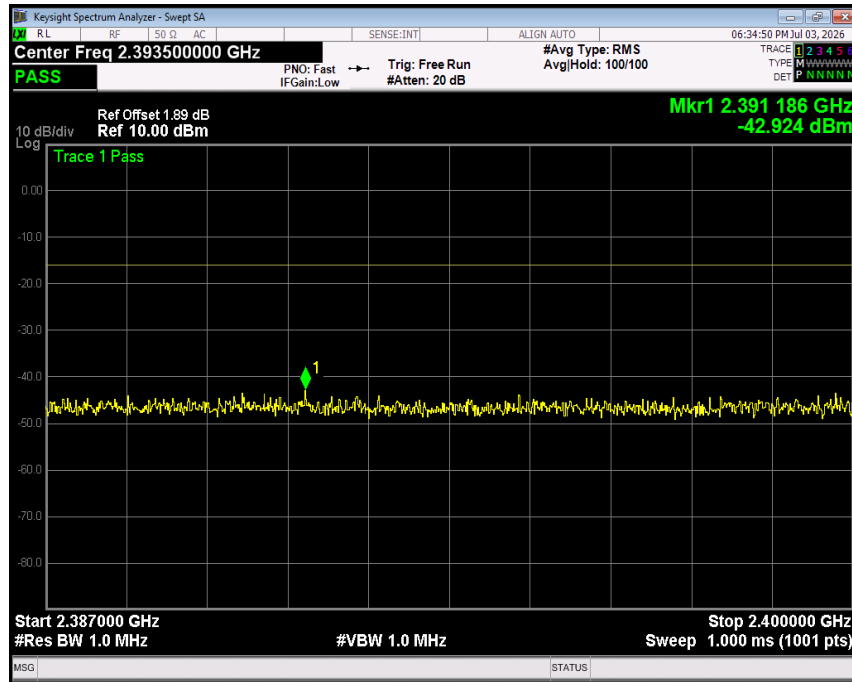

2483.5 MHz ≤ f < 2496.5 MHz

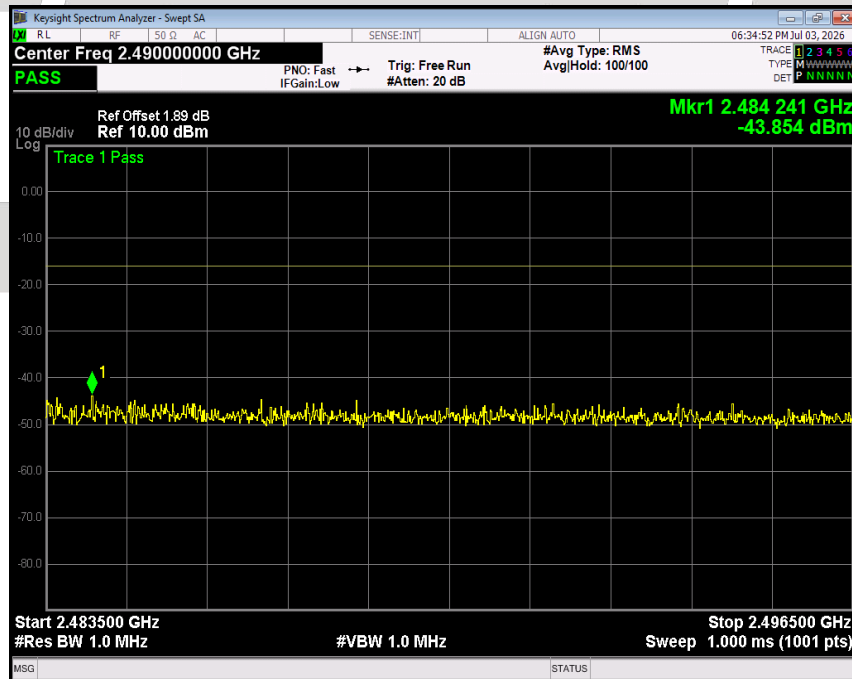


$2496.5 \text{ MHz} \leq f < 13 \text{ GHz}$

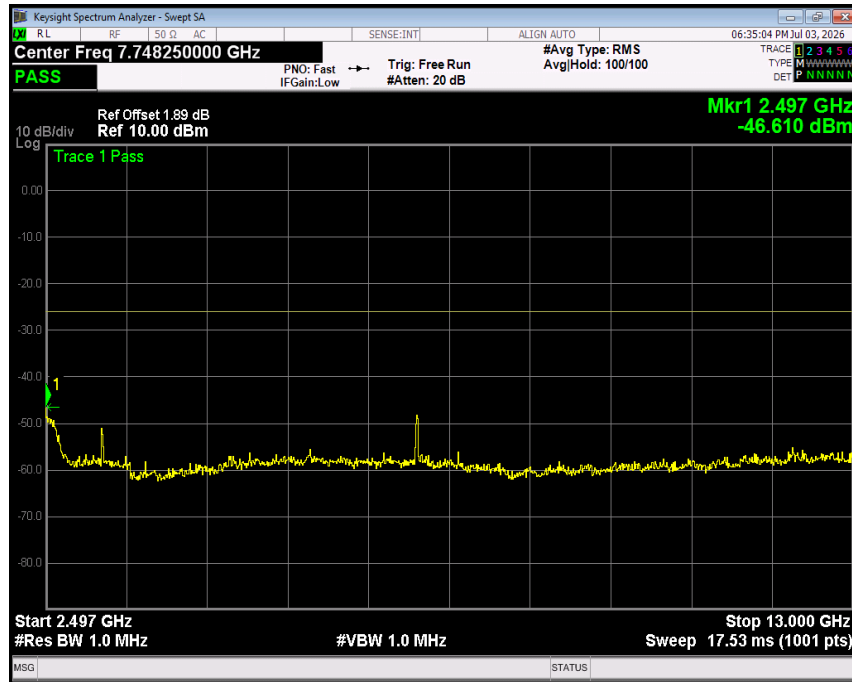


CSTC

Test voltage	Normal	Test Channel (MHz)	2472.00
--------------	--------	--------------------	---------


$$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$$

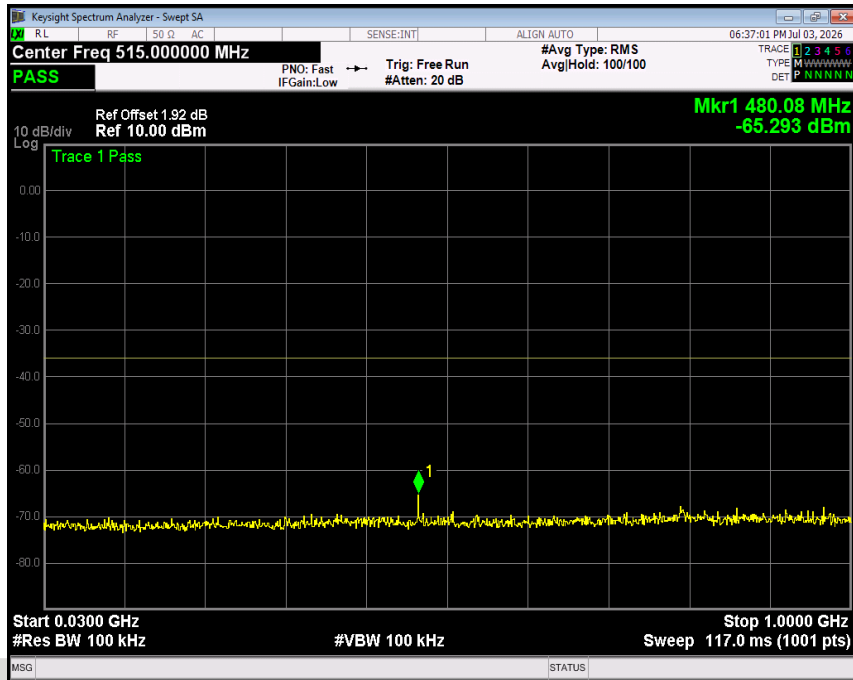


$$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$$

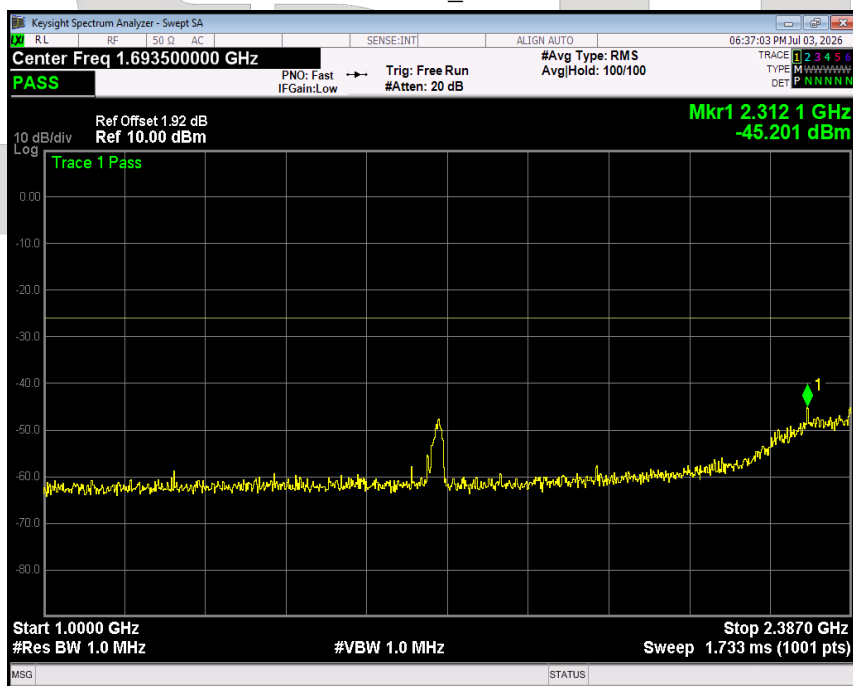


2387 MHz < f ≤ 2400 MHz

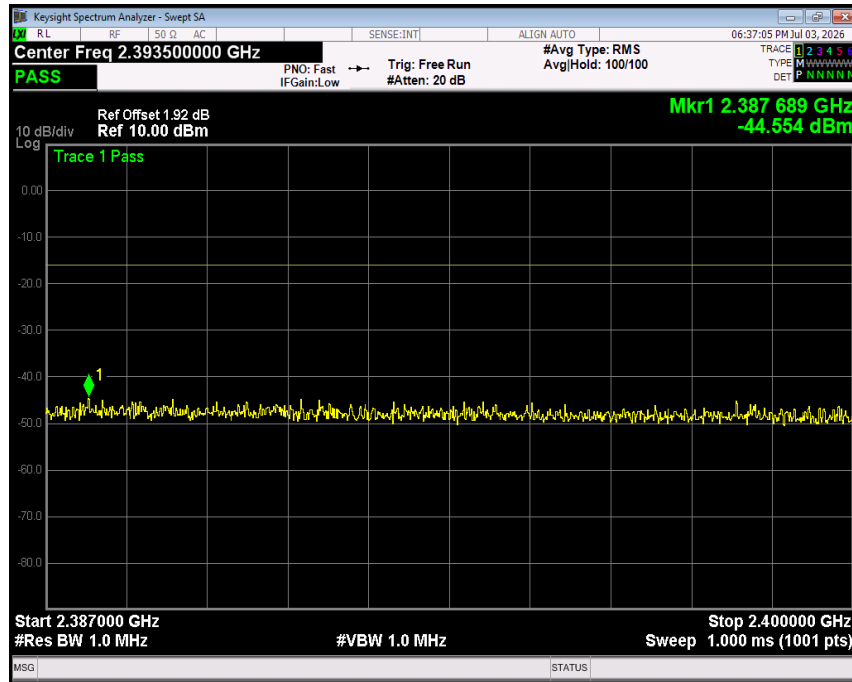

2483.5 MHz ≤ f < 2496.5 MHz

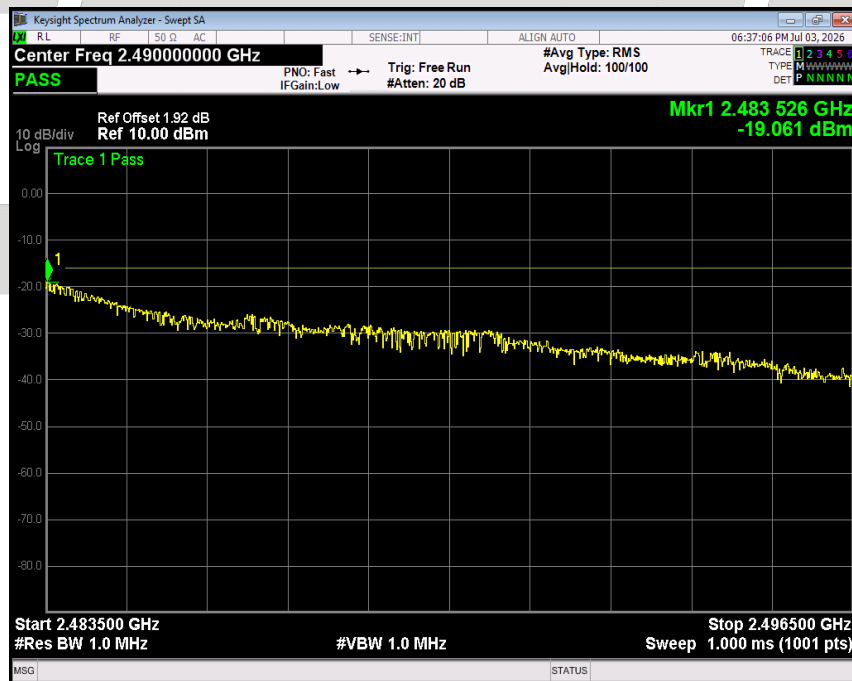



$2496.5 \text{ MHz} \leq f < 13 \text{ GHz}$

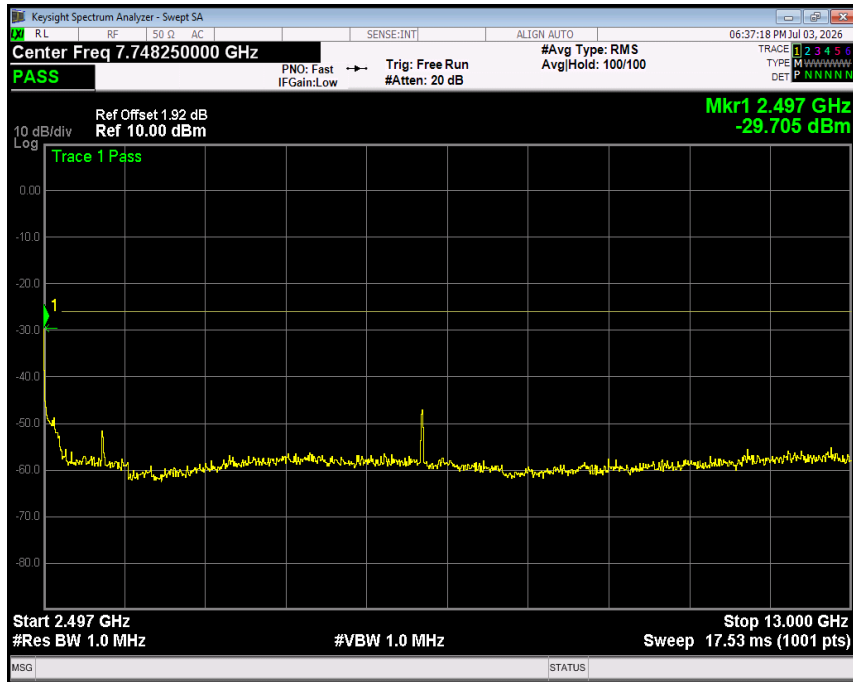


CSTC

Modulation type: 802.11n20


Test voltage	Normal	Test Channel (MHz)	2412.00
--------------	--------	--------------------	---------

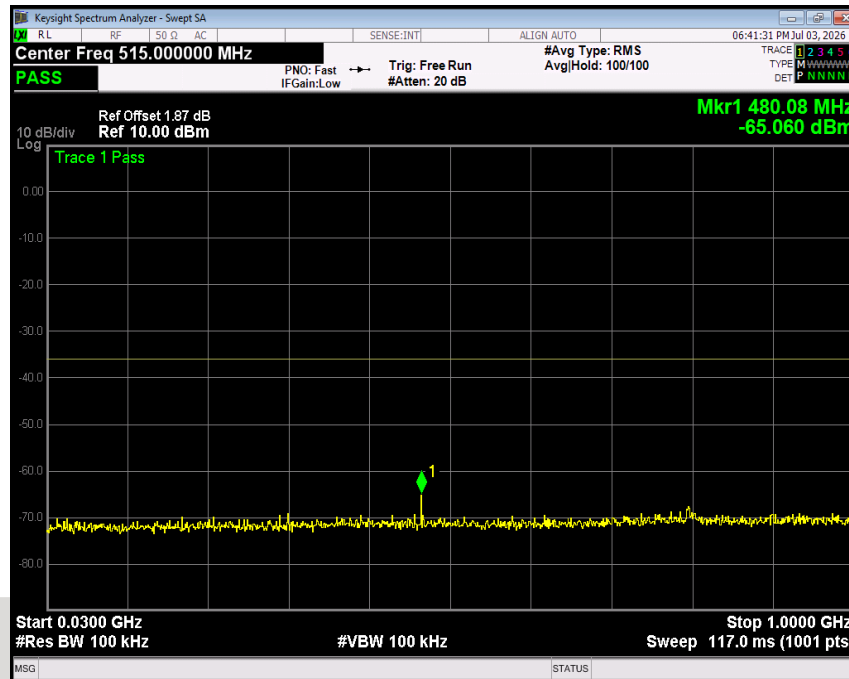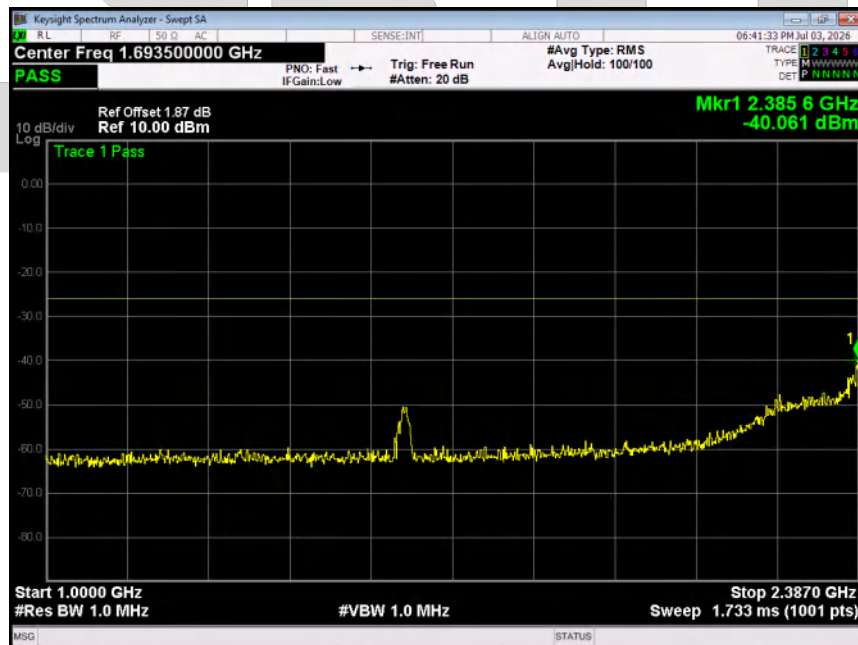 $30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

 $1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

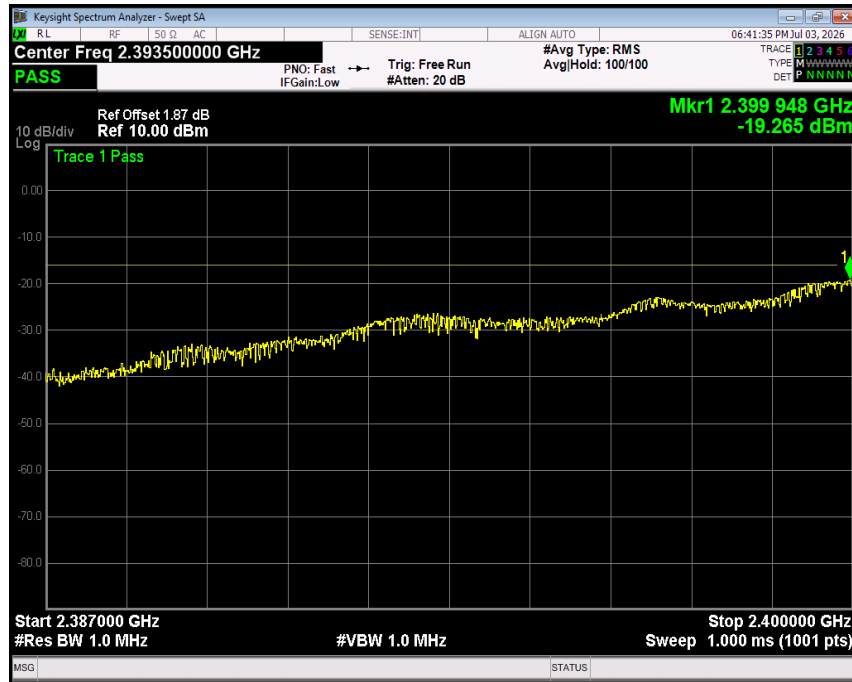
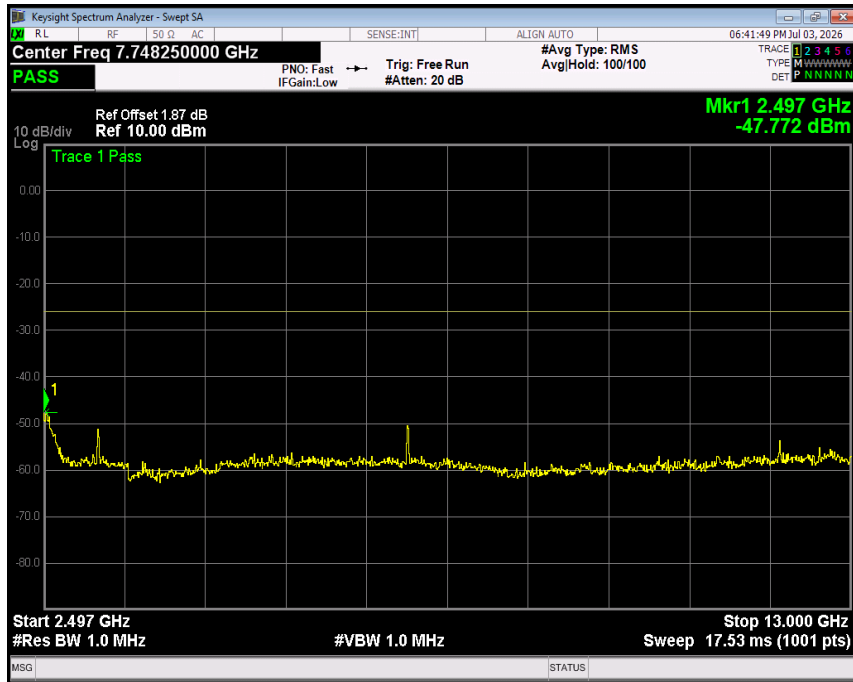
2387 MHz < f ≤ 2400 MHz

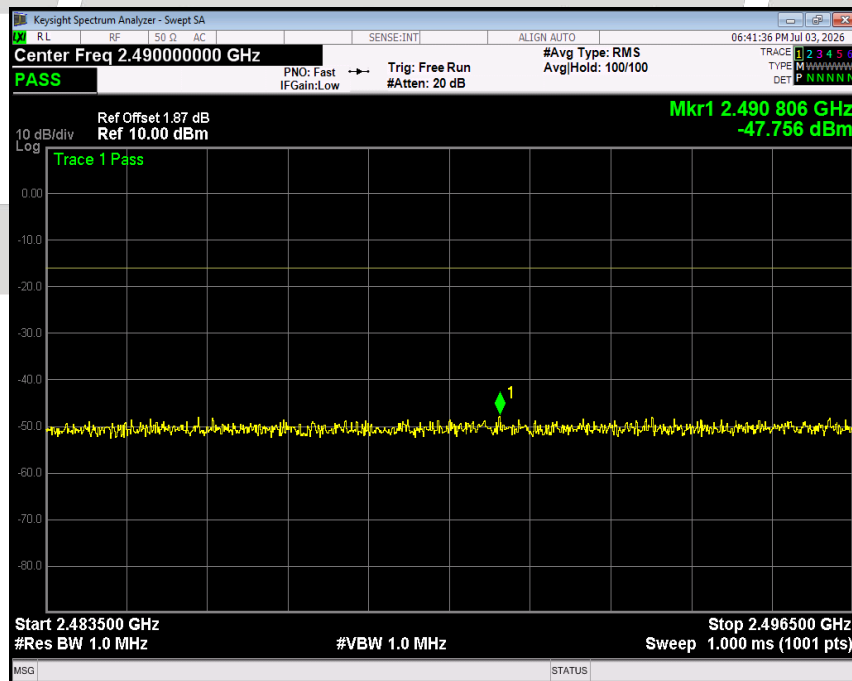

2483.5 MHz ≤ f < 2496.5 MHz




$2496.5 \text{ MHz} \leq f < 13 \text{ GHz}$




Test voltage	Normal	Test Channel (MHz)	2442.00
--------------	--------	--------------------	---------


$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

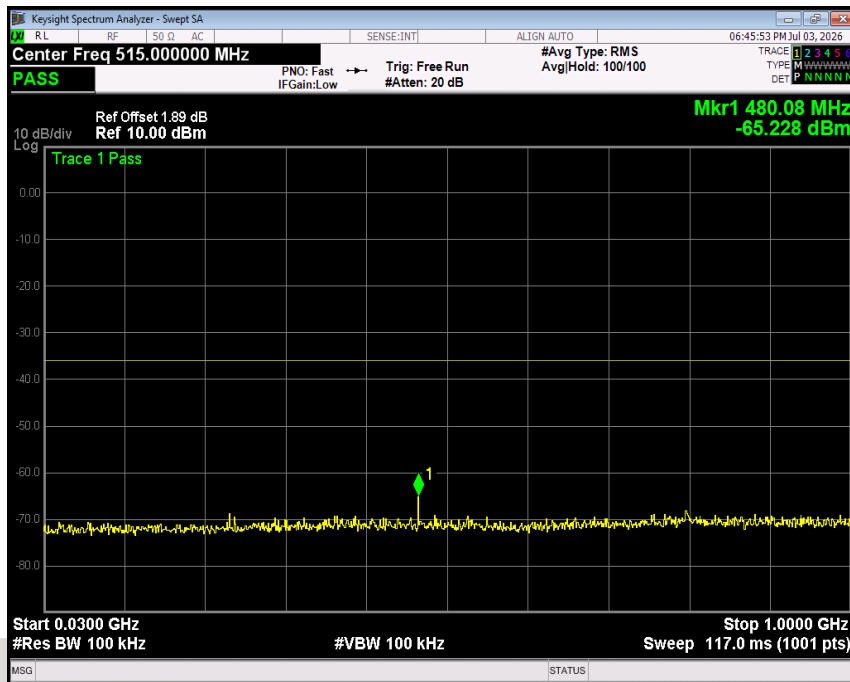


$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

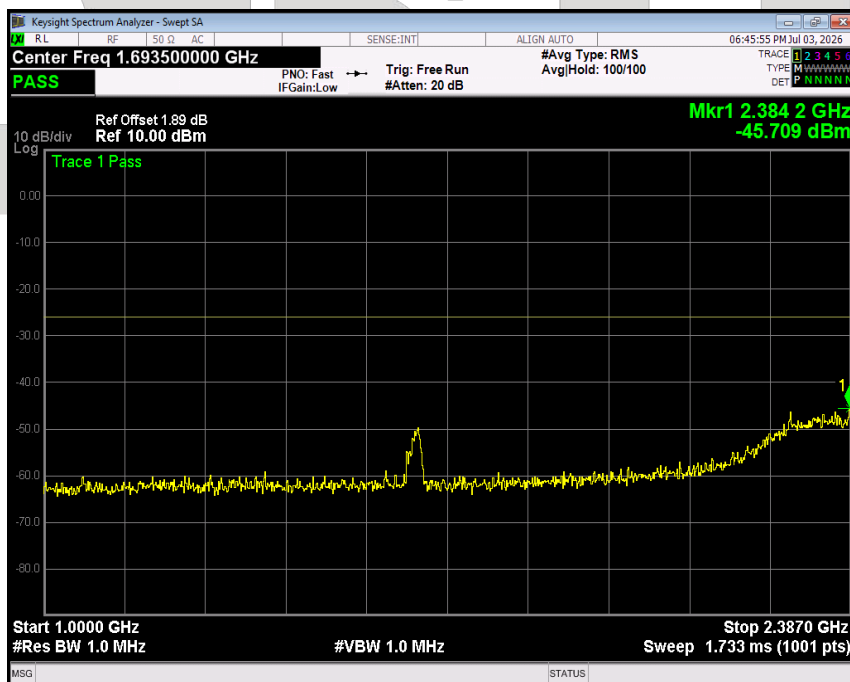


2387 MHz < f ≤ 2400 MHz

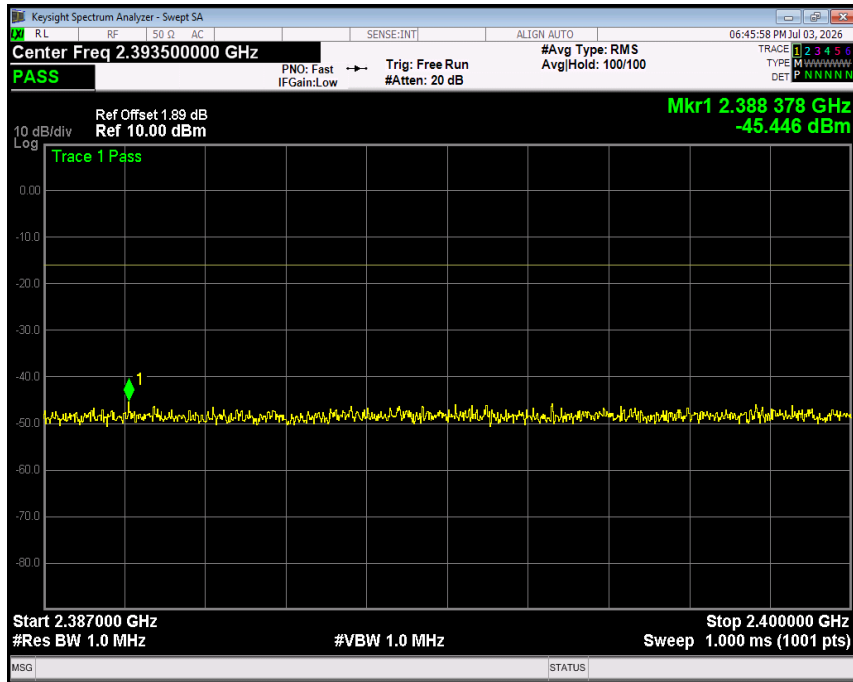

2483.5 MHz ≤ f < 2496.5 MHz

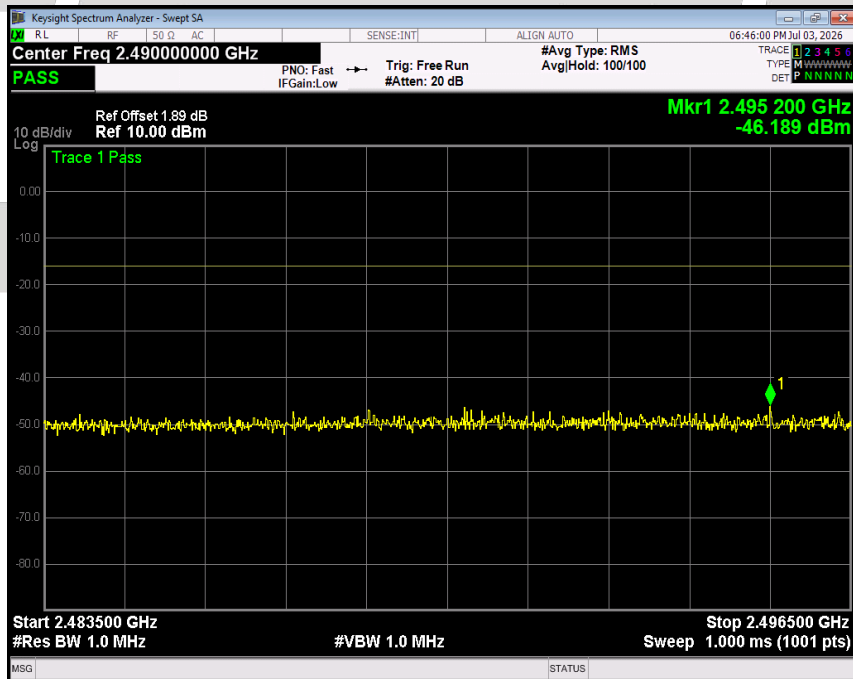


$2496.5 \text{ MHz} \leq f < 13 \text{ GHz}$

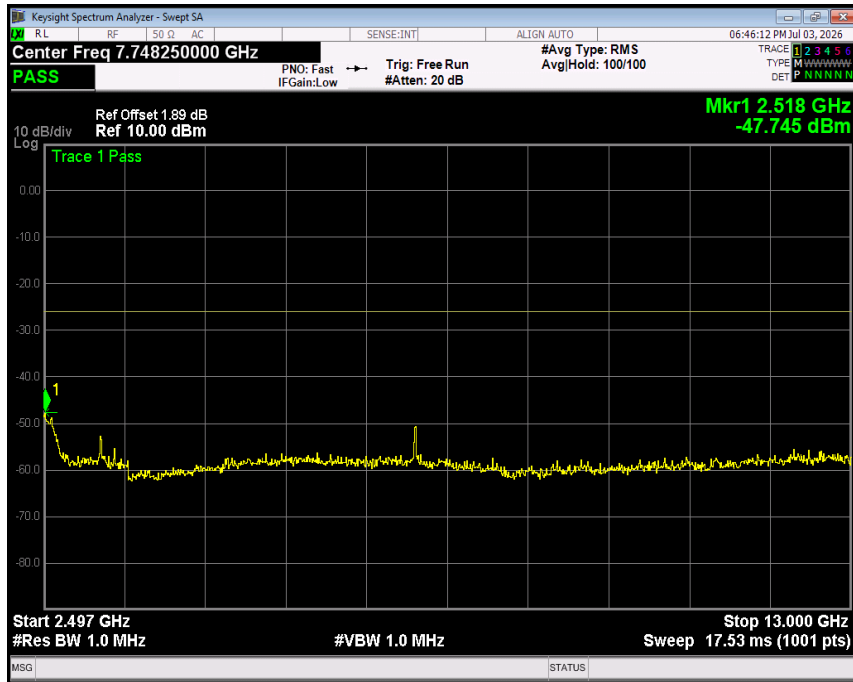


CSTC

Test voltage	Normal	Test Channel (MHz)	2472.00
--------------	--------	--------------------	---------


$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

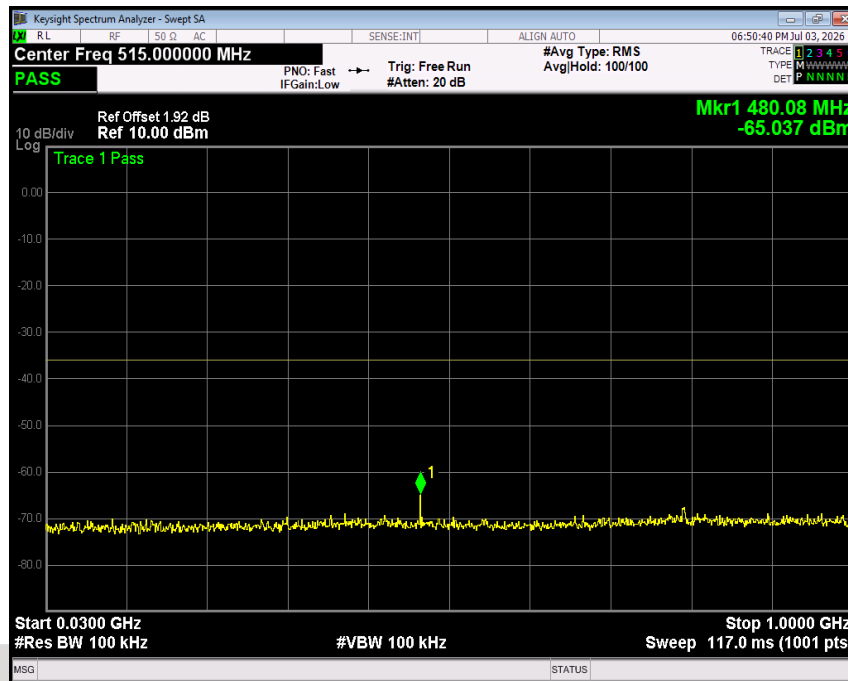



$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

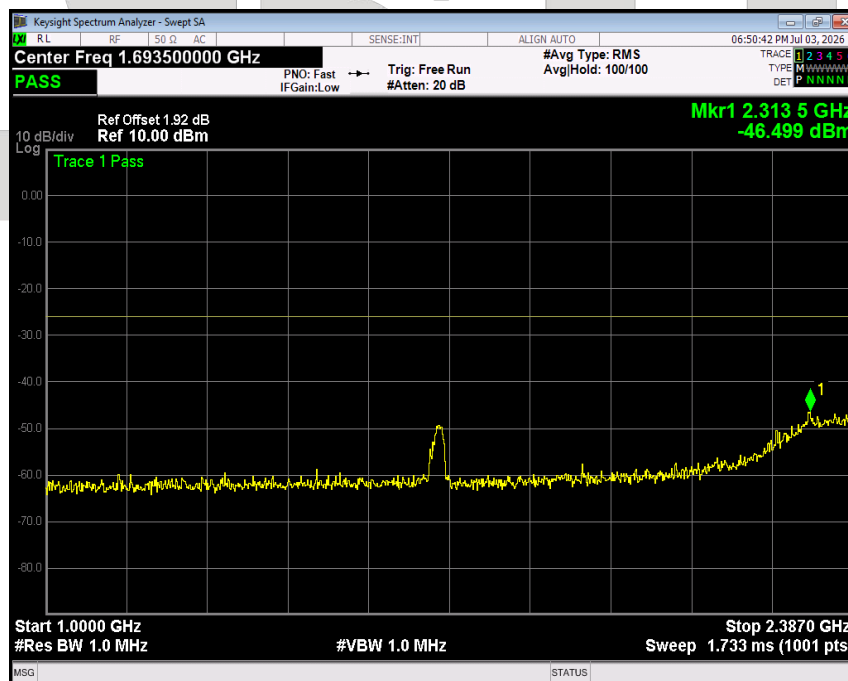


2387 MHz < f ≤ 2400 MHz

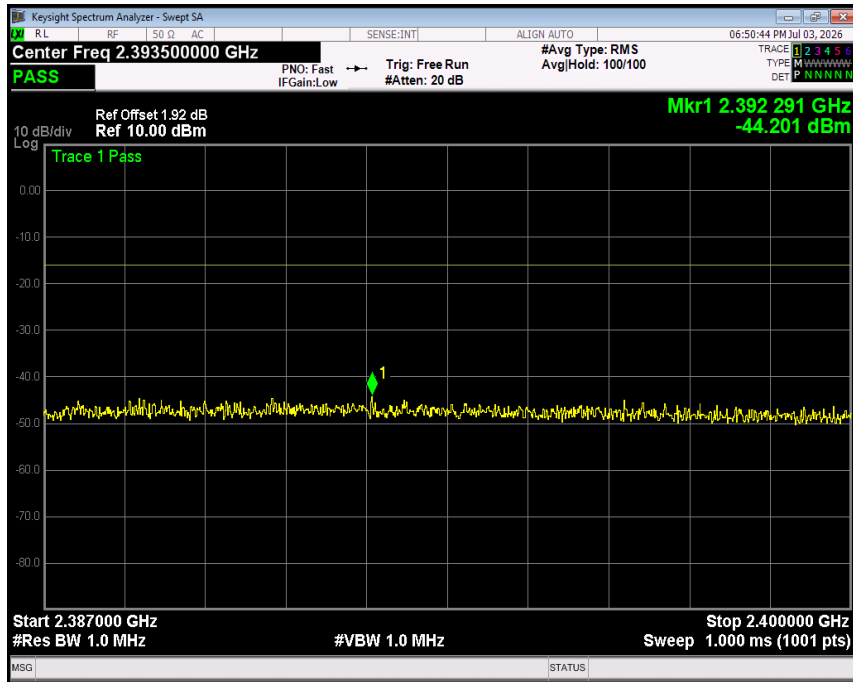

$2483.5 \text{ MHz} \leq f < 2496.5 \text{ MHz}$

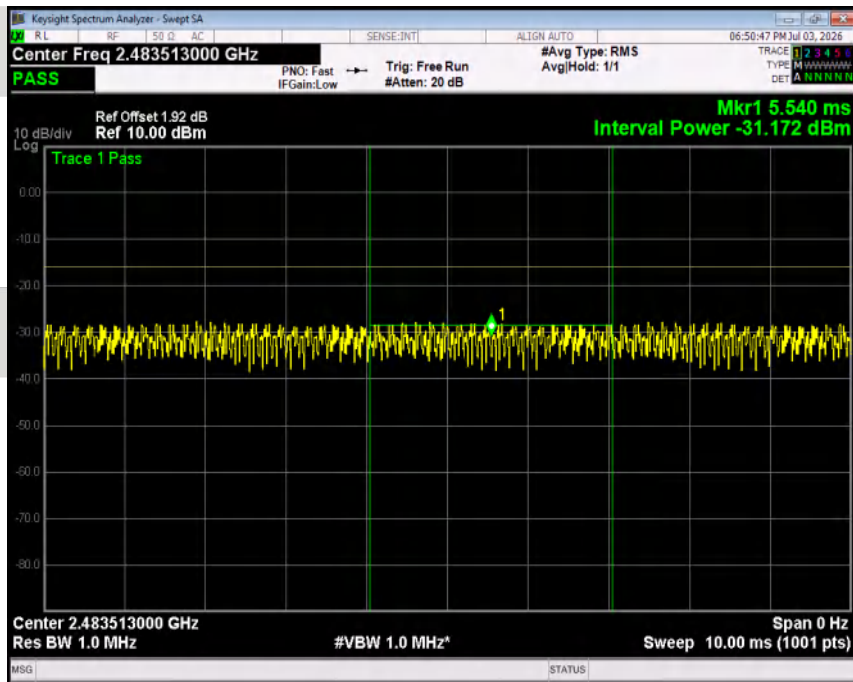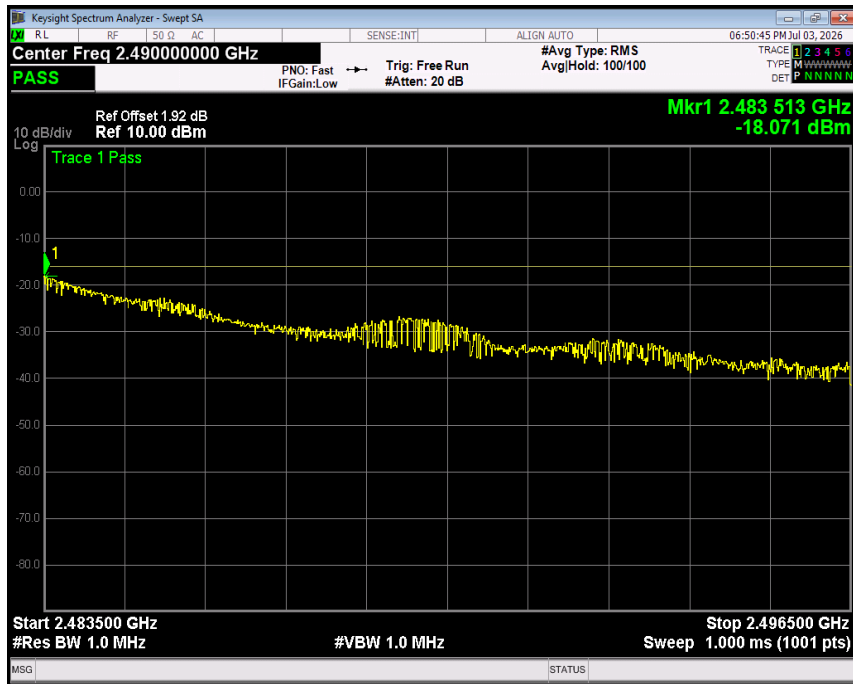



$2496.5 \text{ MHz} \leq f < 13 \text{ GHz}$

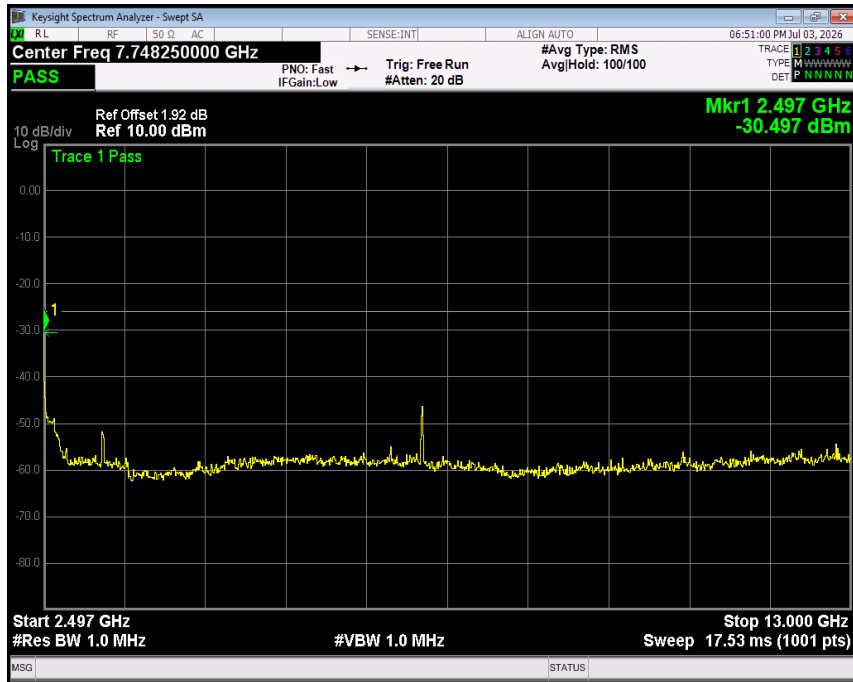


CSTC

Modulation type: 802.11n40


Test voltage	Normal	Test Channel (MHz)	2412.00
--------------	--------	--------------------	---------

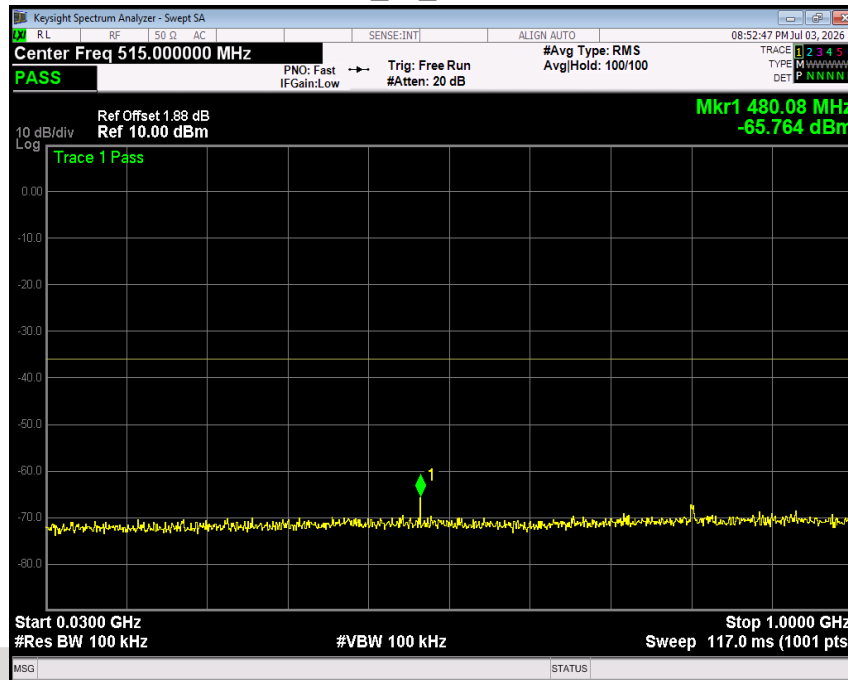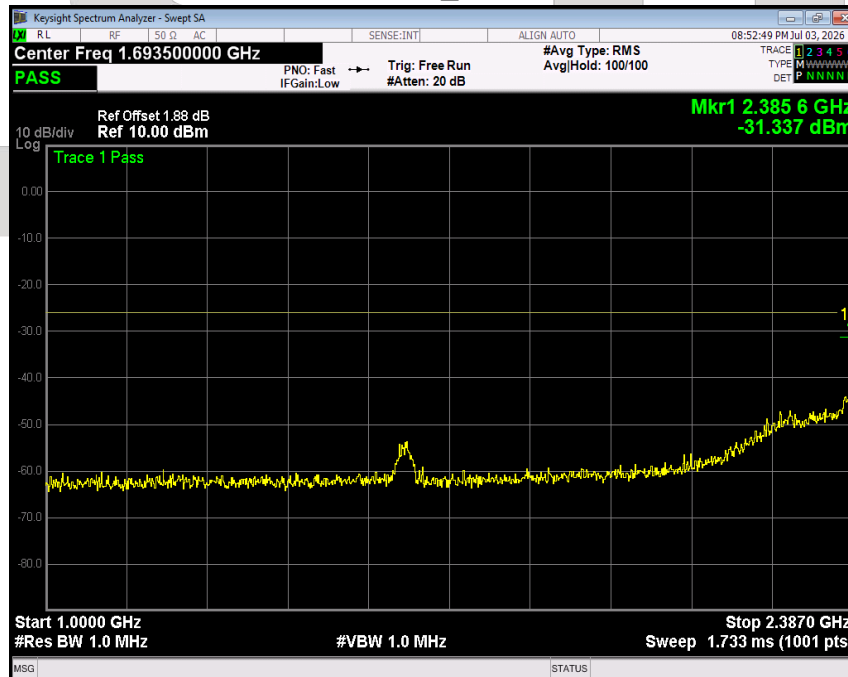
 $30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

 $1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

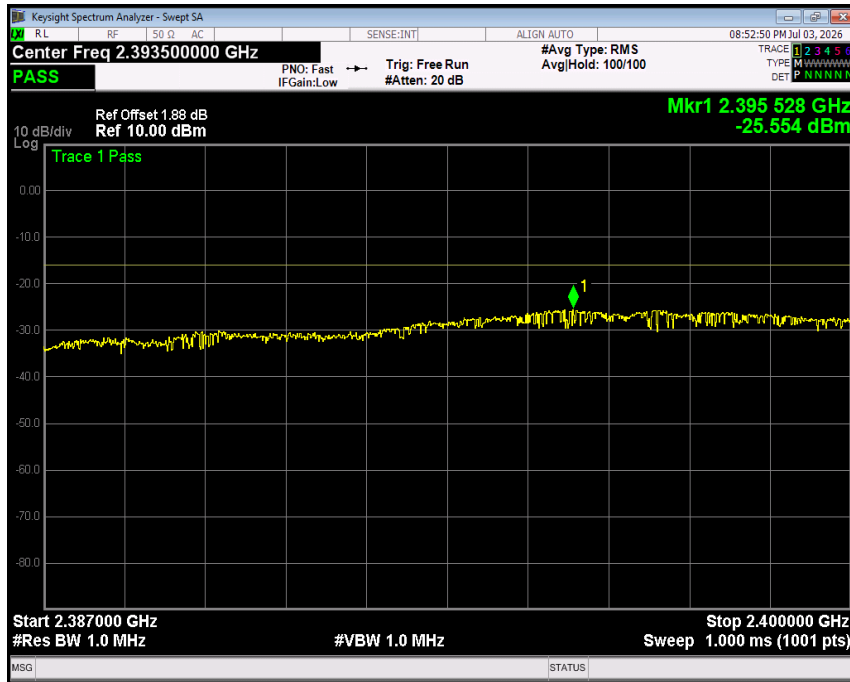
2387 MHz < f ≤ 2400 MHz

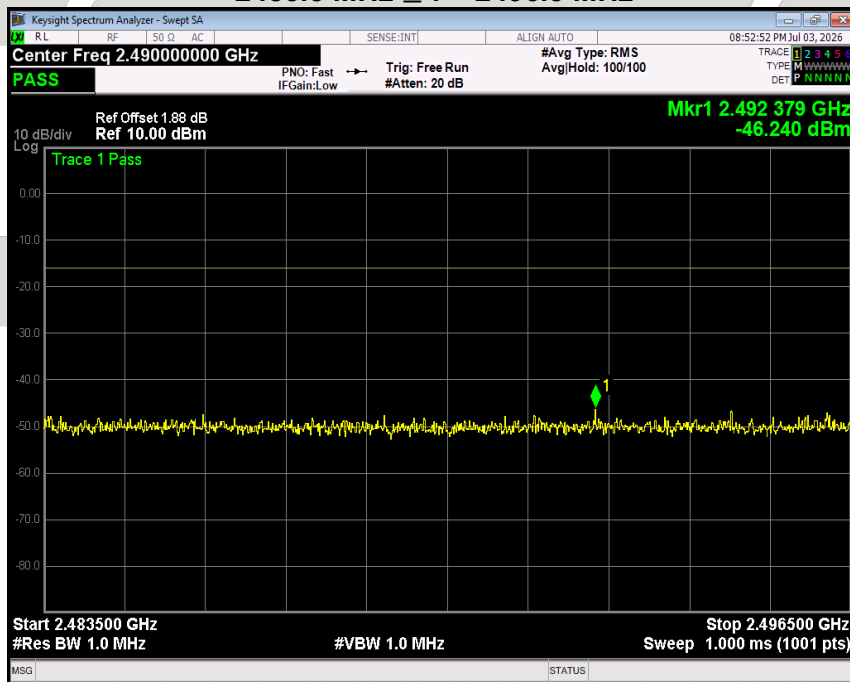


2483.5 MHz ≤ f < 2496.5 MHz

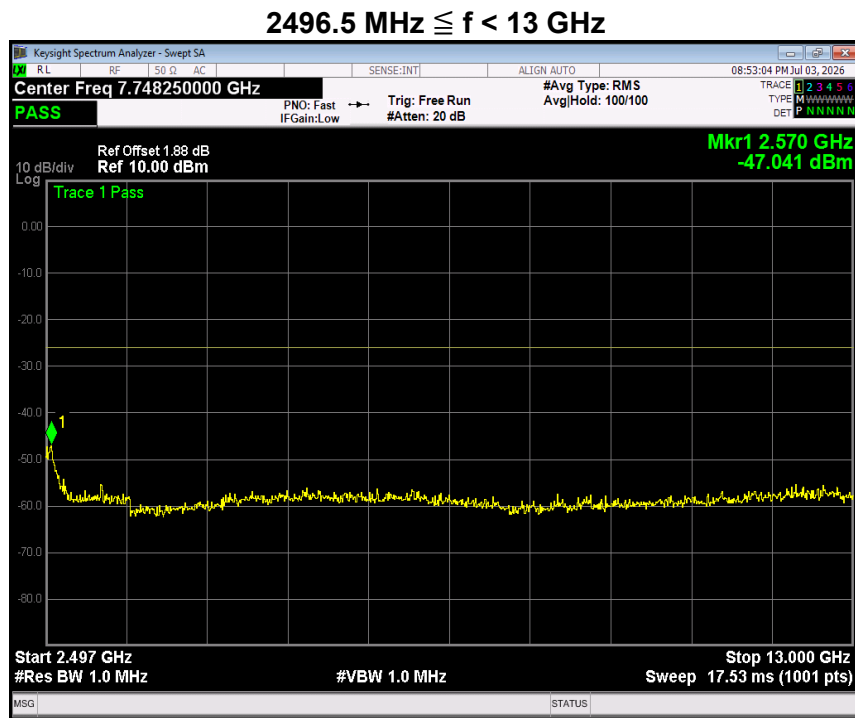




Test voltage	Normal	Test Channel (MHz)	2442.00
--------------	--------	--------------------	---------


30 MHz $\leq f \leq$ 1000 MHz

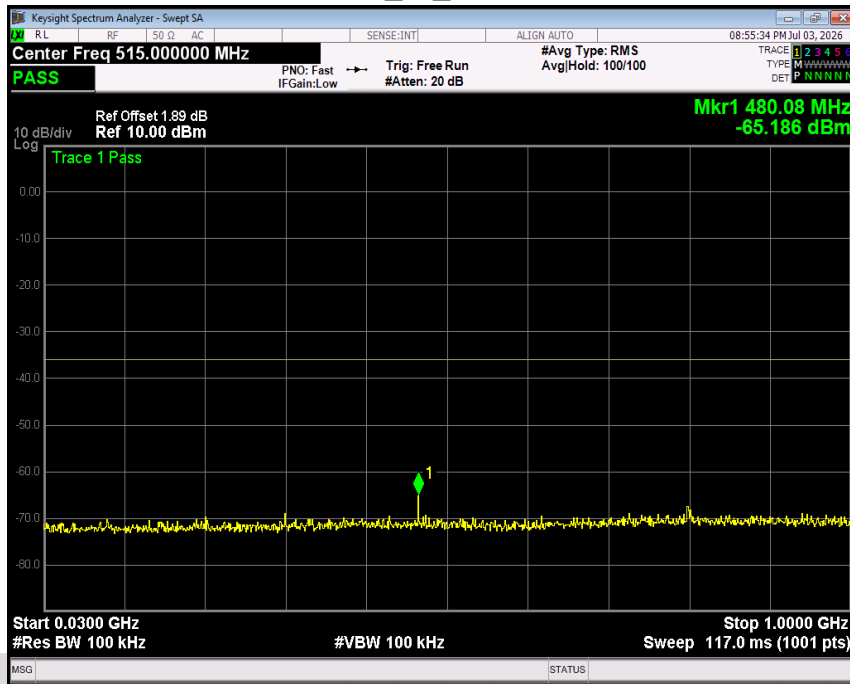


1000 MHz $< f \leq$ 2387 MHz

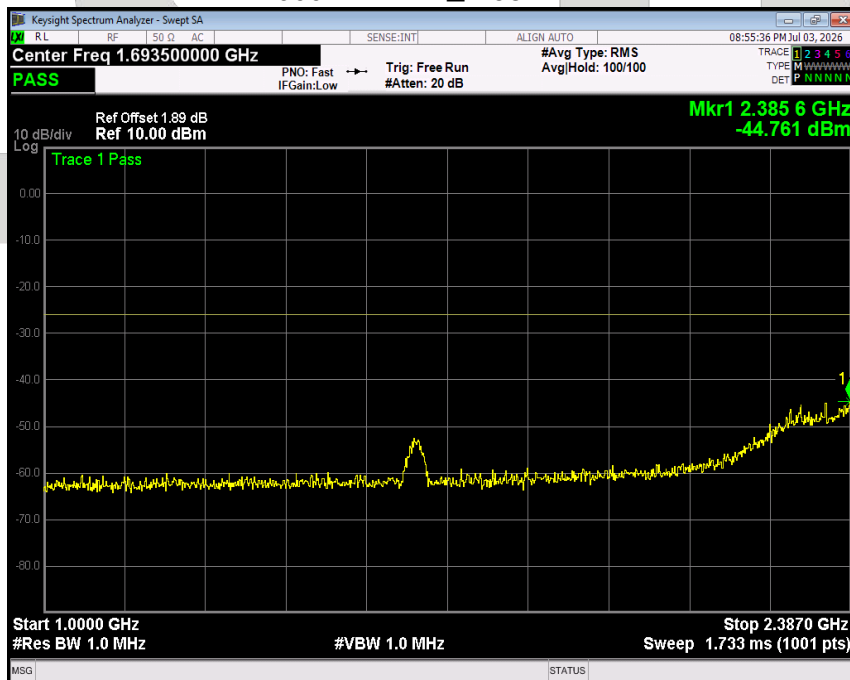


2387 MHz < f ≤ 2400 MHz

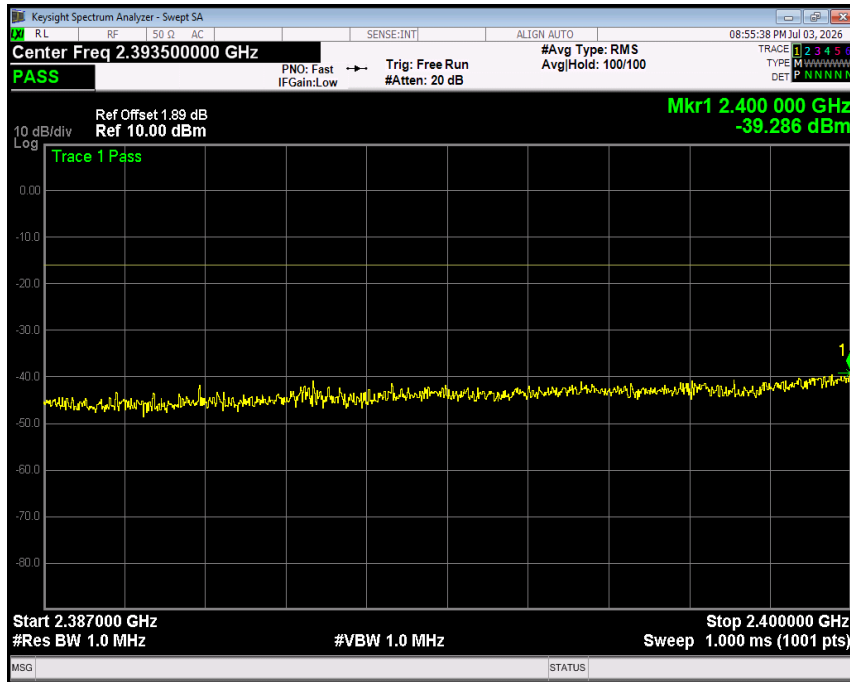


2483.5 MHz ≤ f < 2496.5 MHz

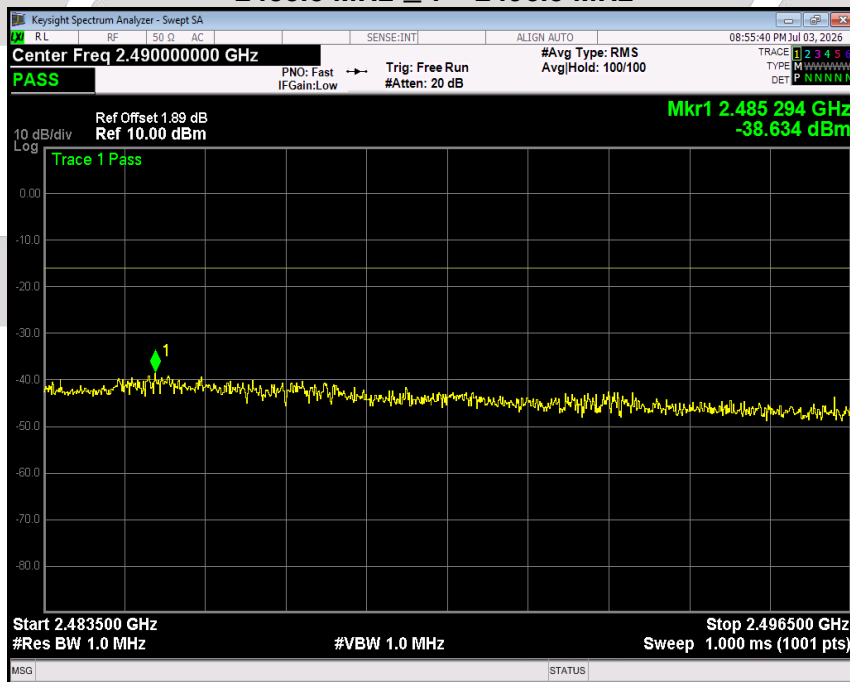

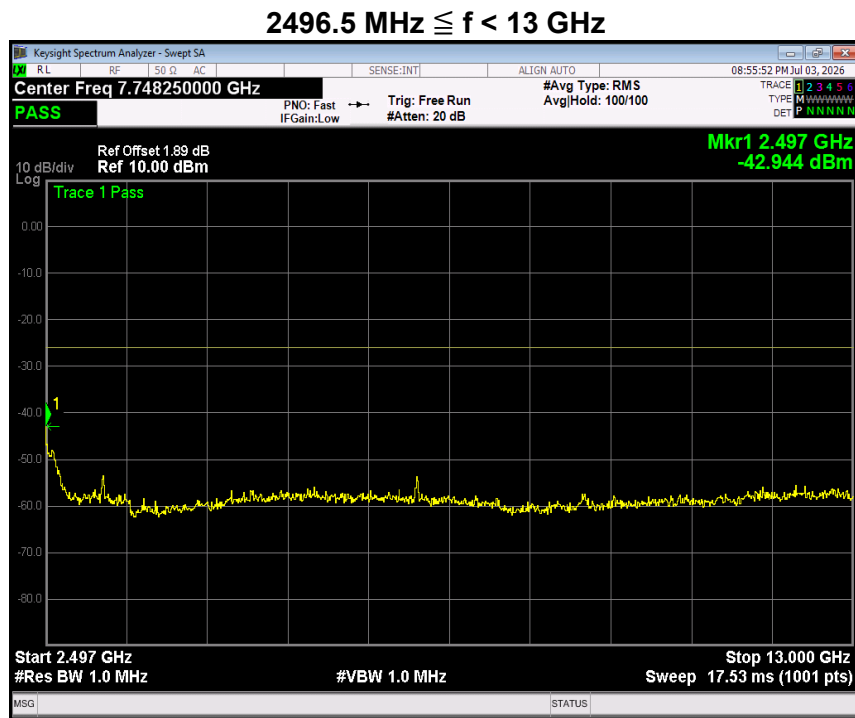


Test voltage	Normal	Test Channel (MHz)	2472.00
--------------	--------	--------------------	---------


$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

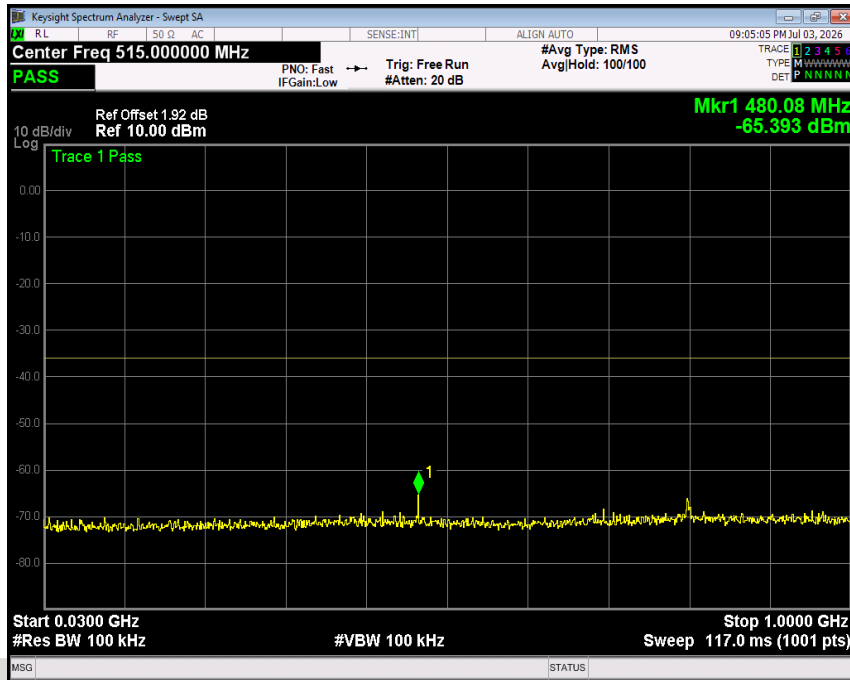


$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

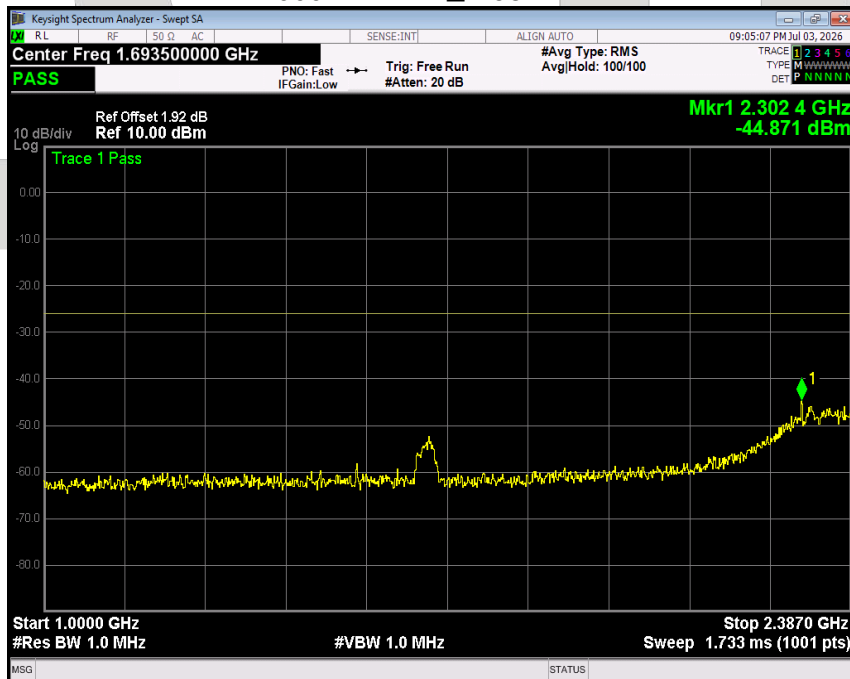


2387 MHz < f ≤ 2400 MHz

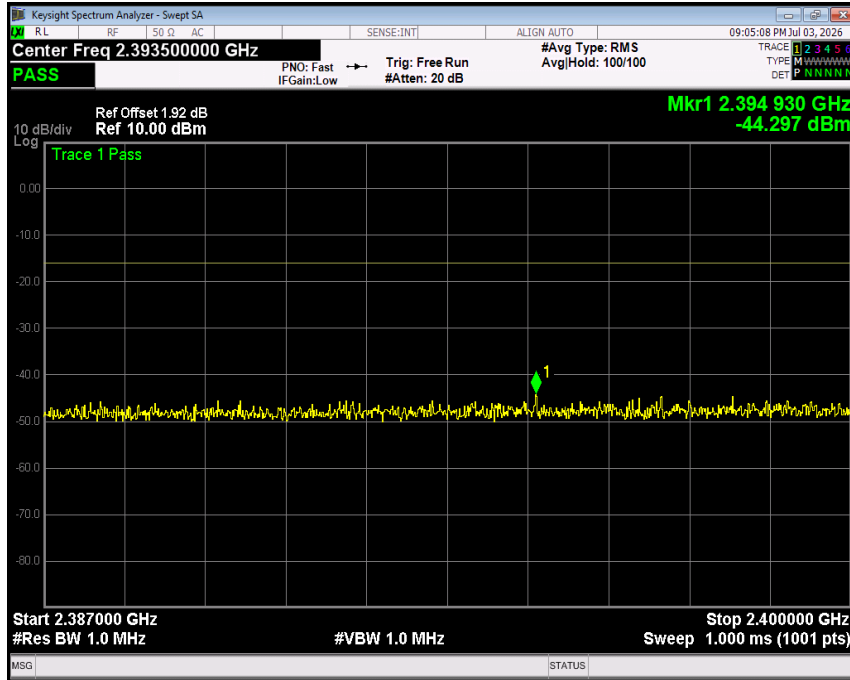



2483.5 MHz ≤ f < 2496.5 MHz

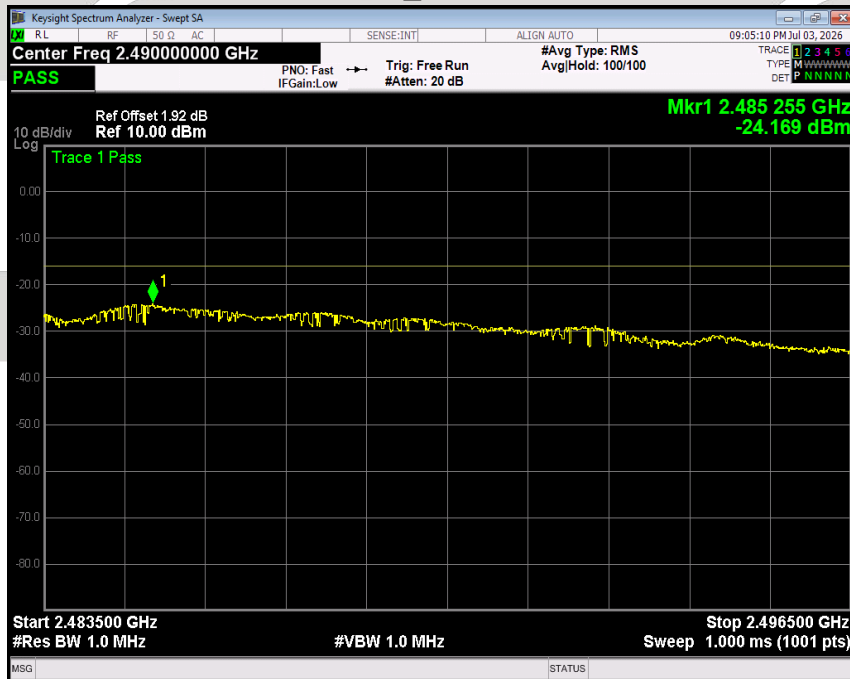

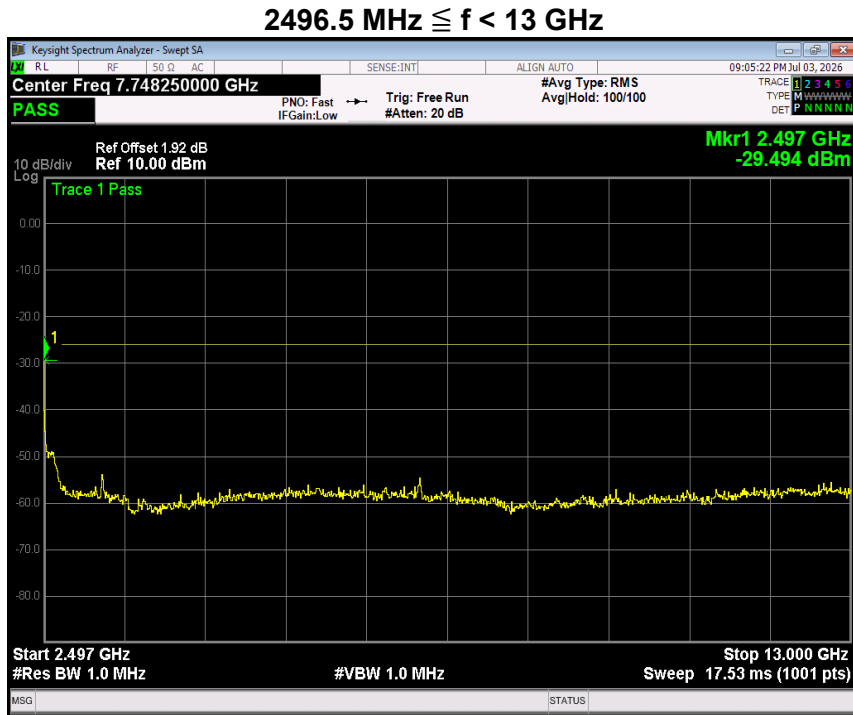


Modulation type: 802.11ax20


Test voltage	Normal	Test Channel (MHz)	2412.00	Test voltage
--------------	--------	--------------------	---------	--------------

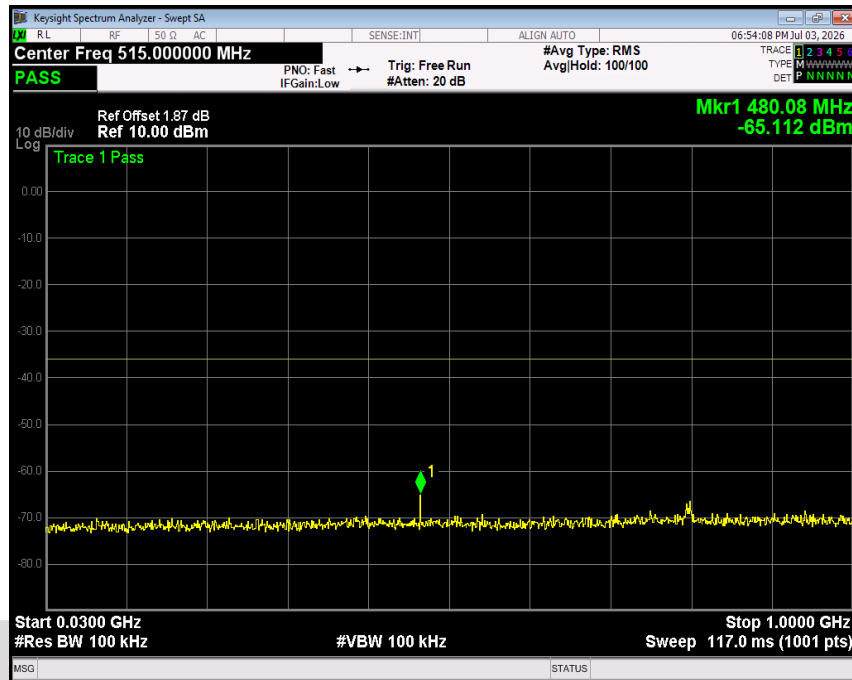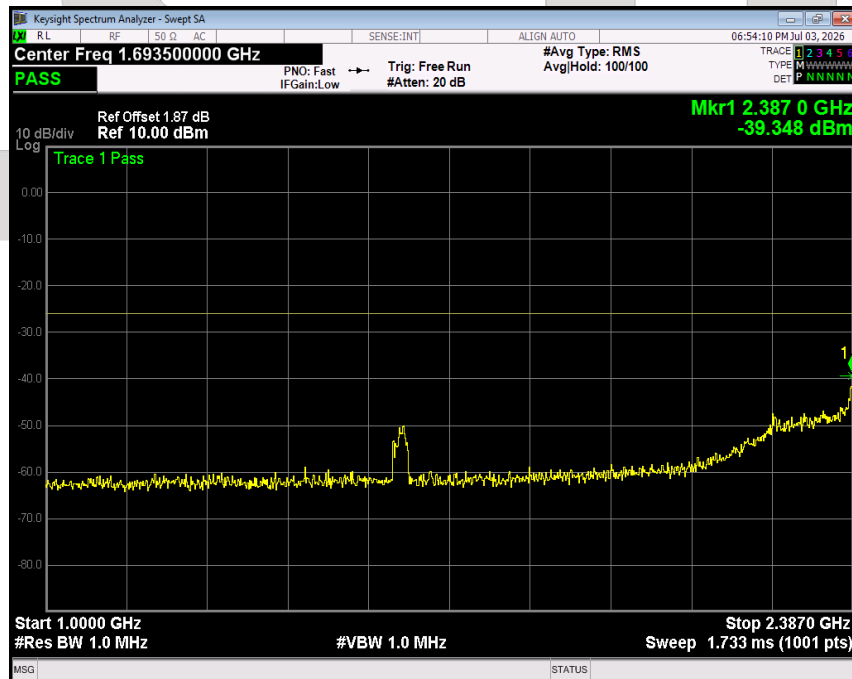 $30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

 $1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

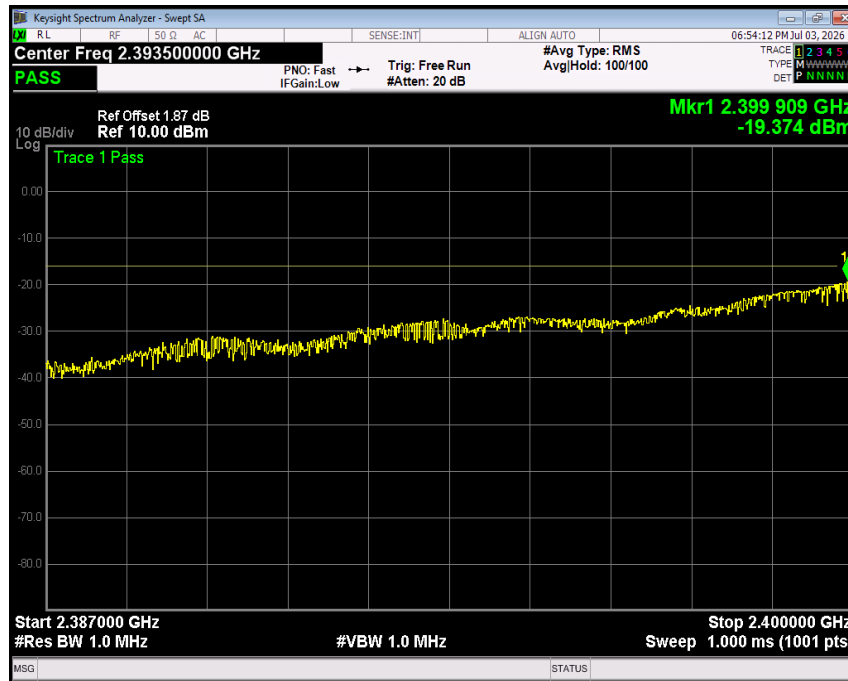
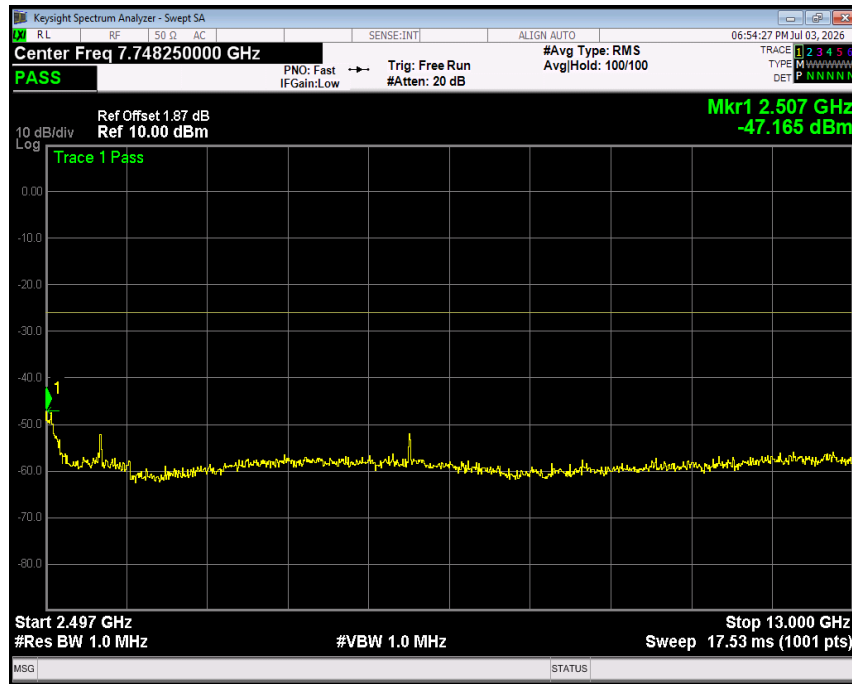
2387 MHz < f ≤ 2400 MHz

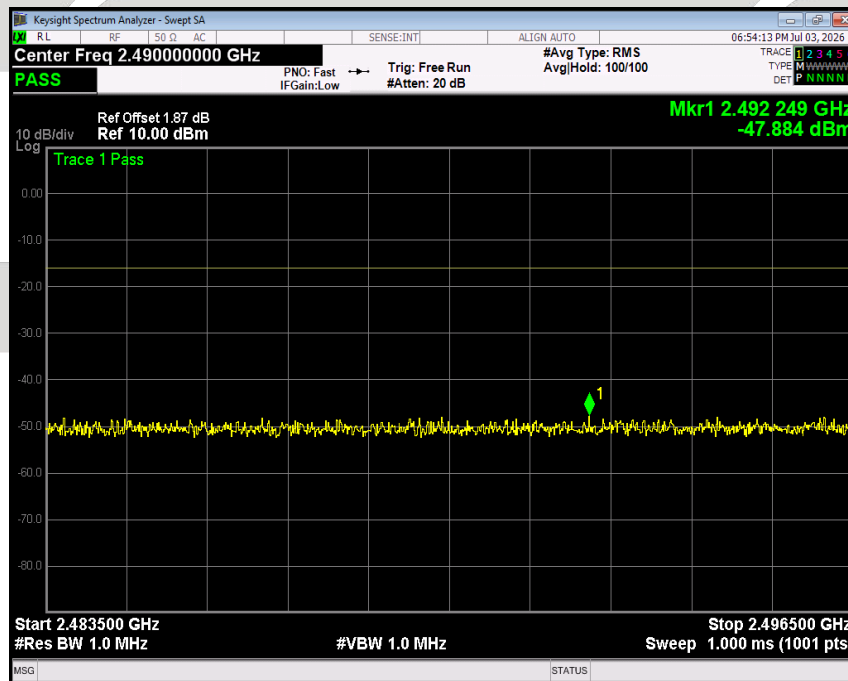

2483.5 MHz ≤ f < 2496.5 MHz




2496.5 MHz $\leq f < 13$ GHz




CSTC

Test voltage	Normal	Test Channel (MHz)	2442.00
--------------	--------	--------------------	---------


30 MHz $\leq f \leq$ 1000 MHz

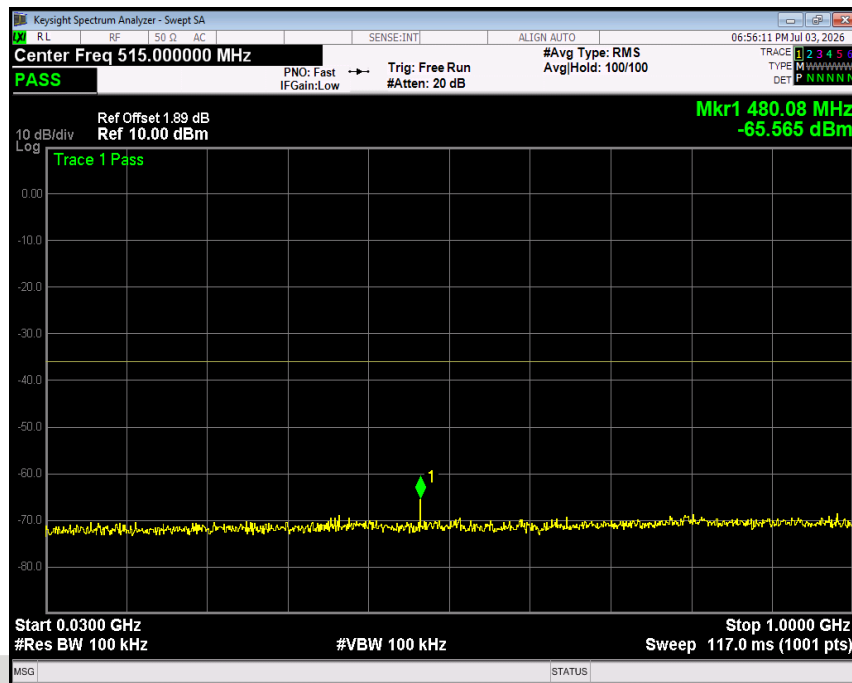


1000 MHz $< f \leq$ 2387 MHz

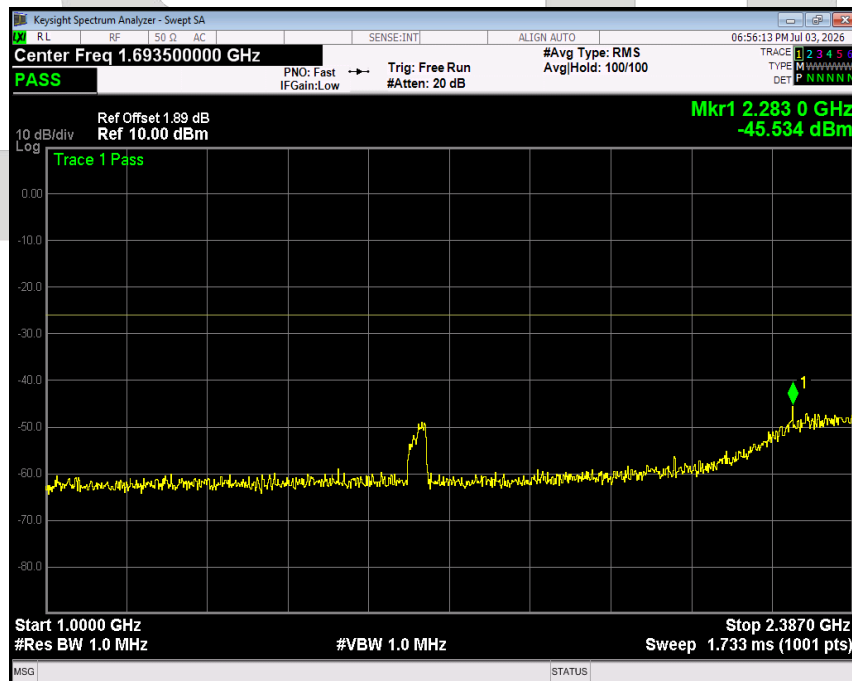


2387 MHz < f ≤ 2400 MHz

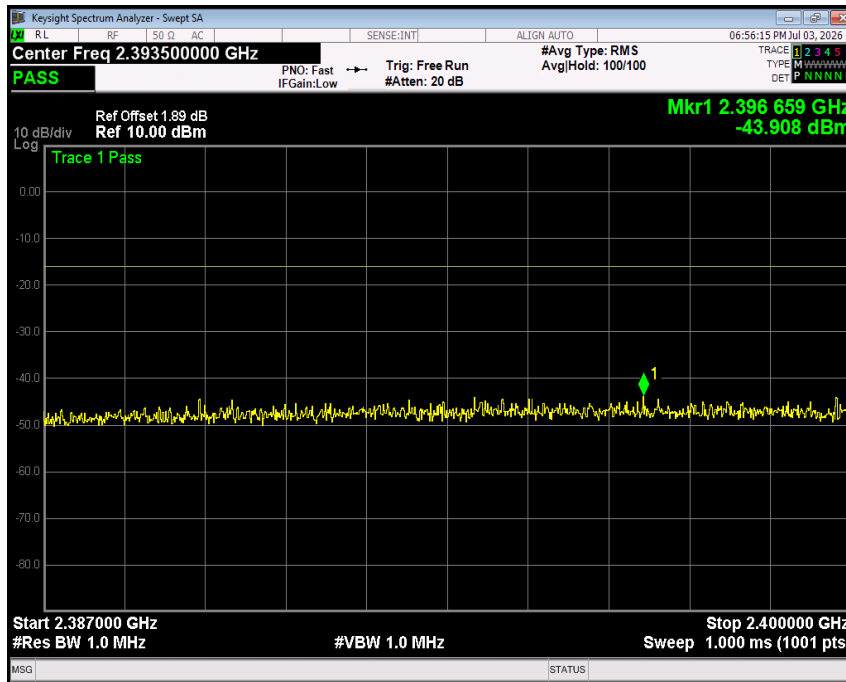


2483.5 MHz ≤ f < 2496.5 MHz

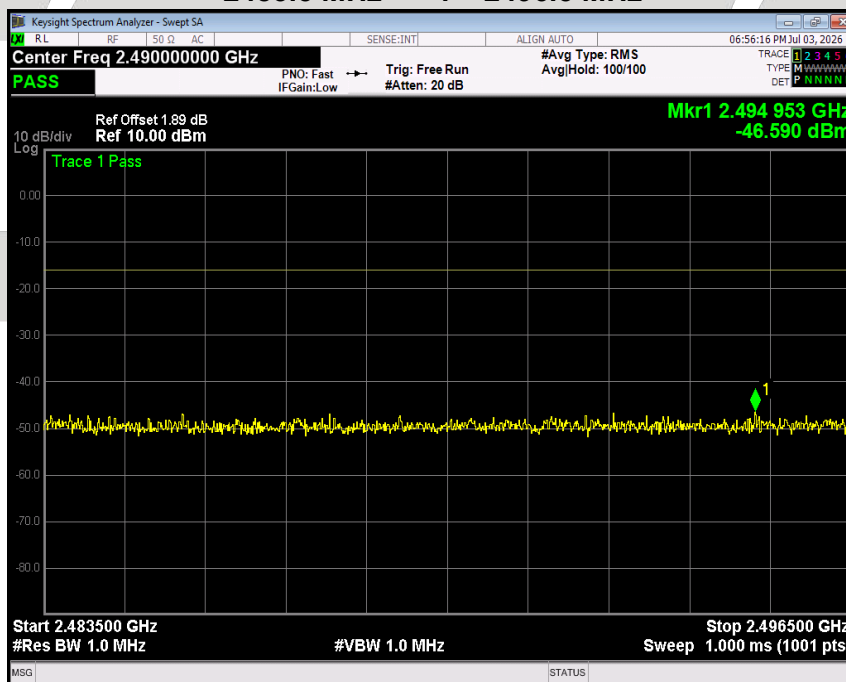

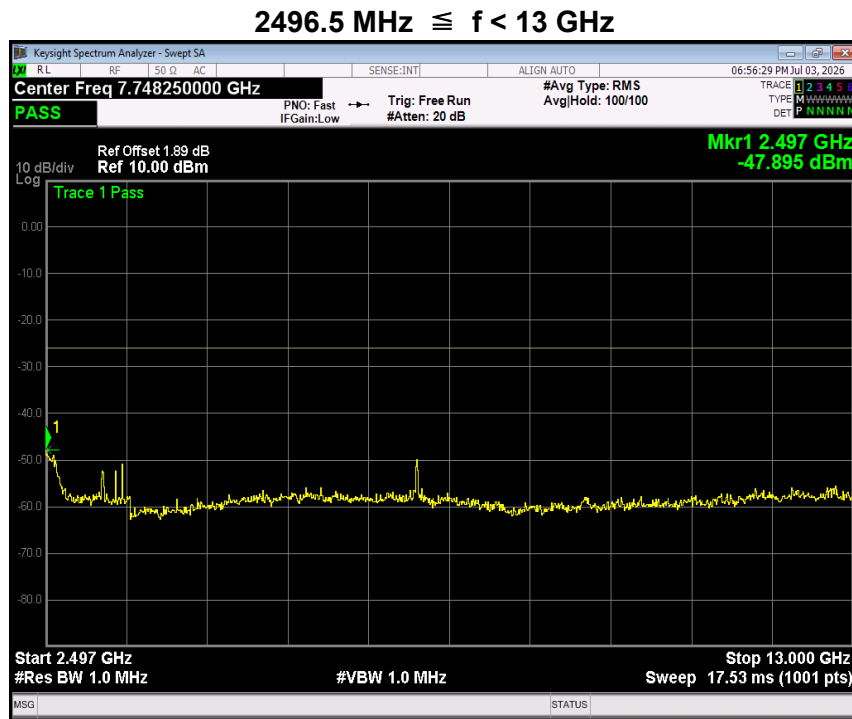



Test voltage	Normal	Test Channel (MHz)	2472.00
--------------	--------	--------------------	---------



$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

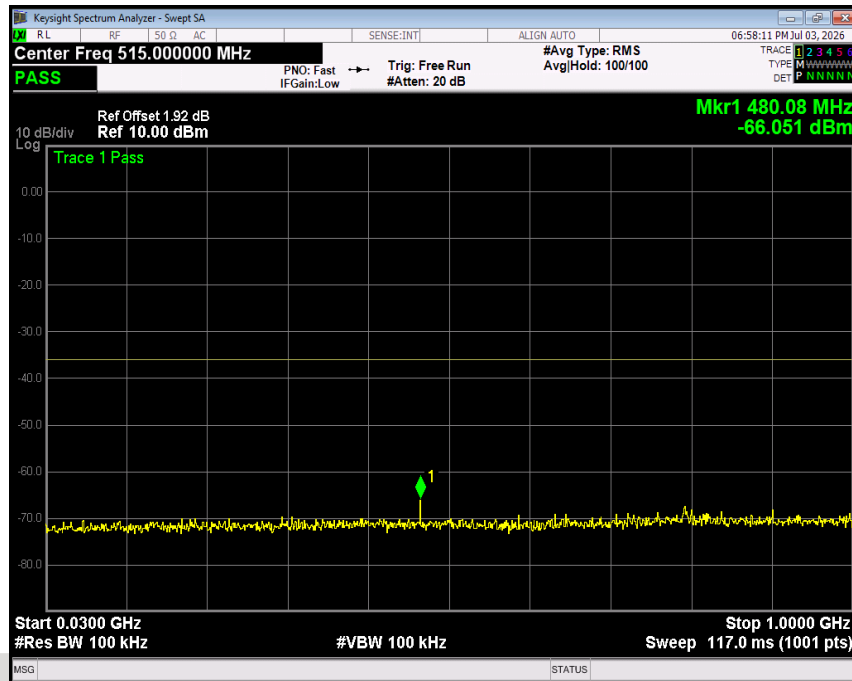


$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

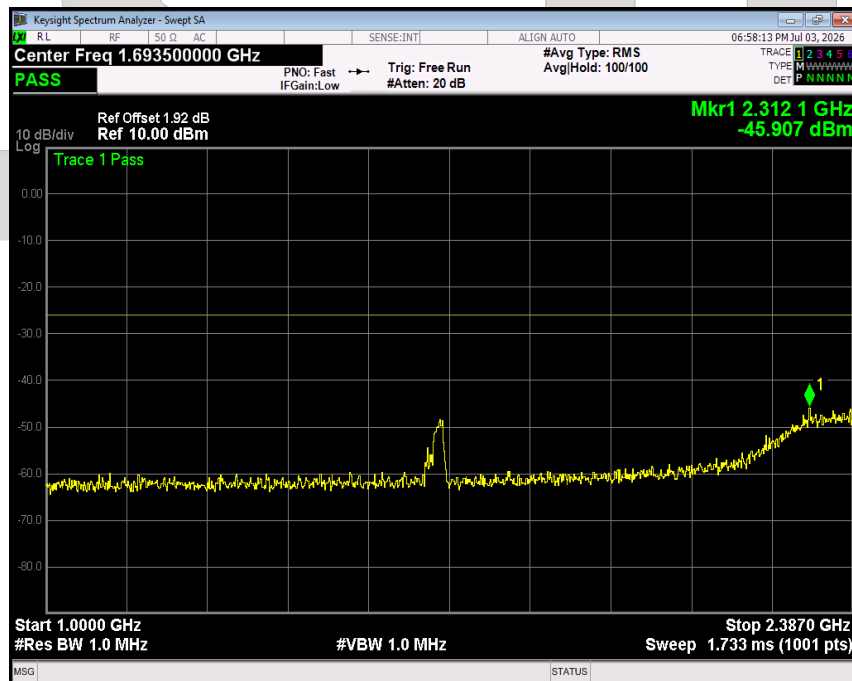

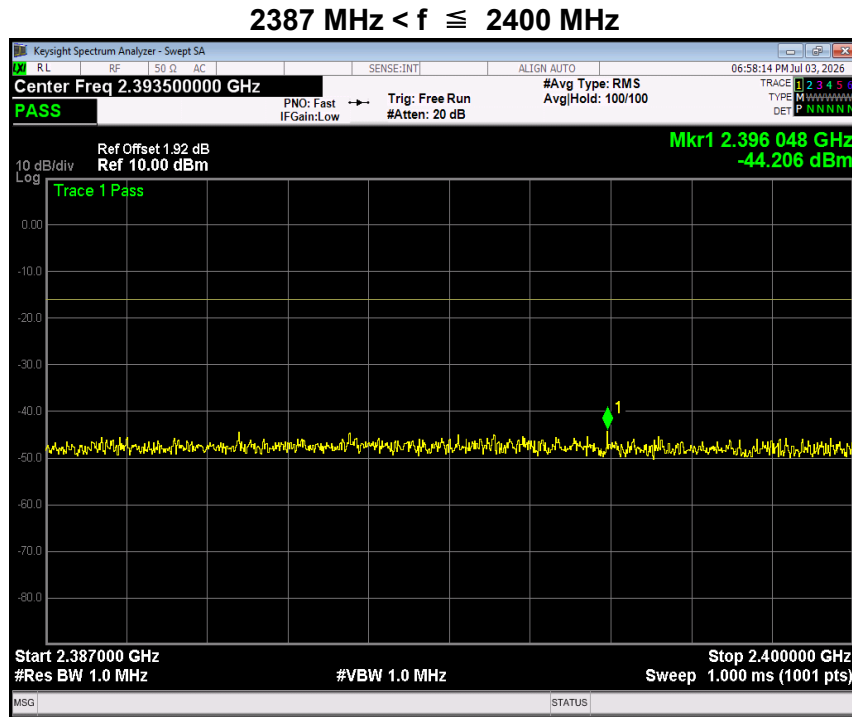

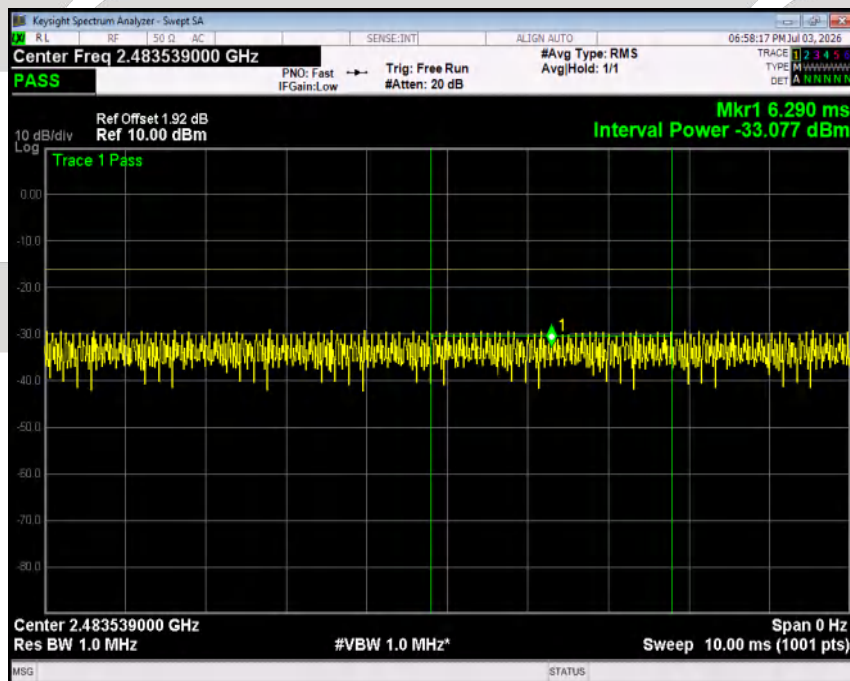
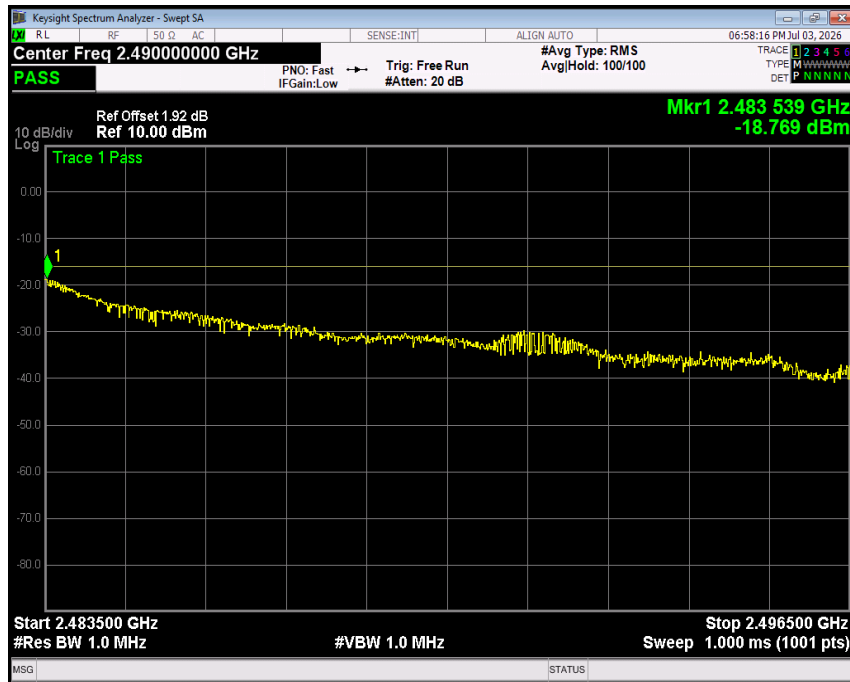
$2483.5 \text{ MHz} \leq f < 2496.5 \text{ MHz}$ 

2496.5 MHz $\leq f < 13$ GHz

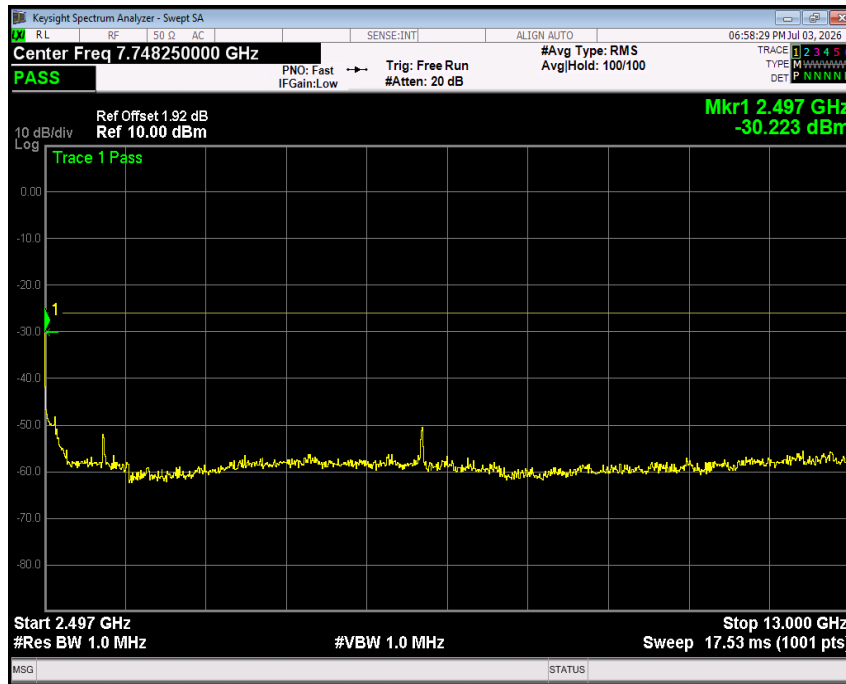


Modulation type: 802.11ax40


Test voltage	Normal	Test Channel (MHz)	2422.00
--------------	--------	--------------------	---------

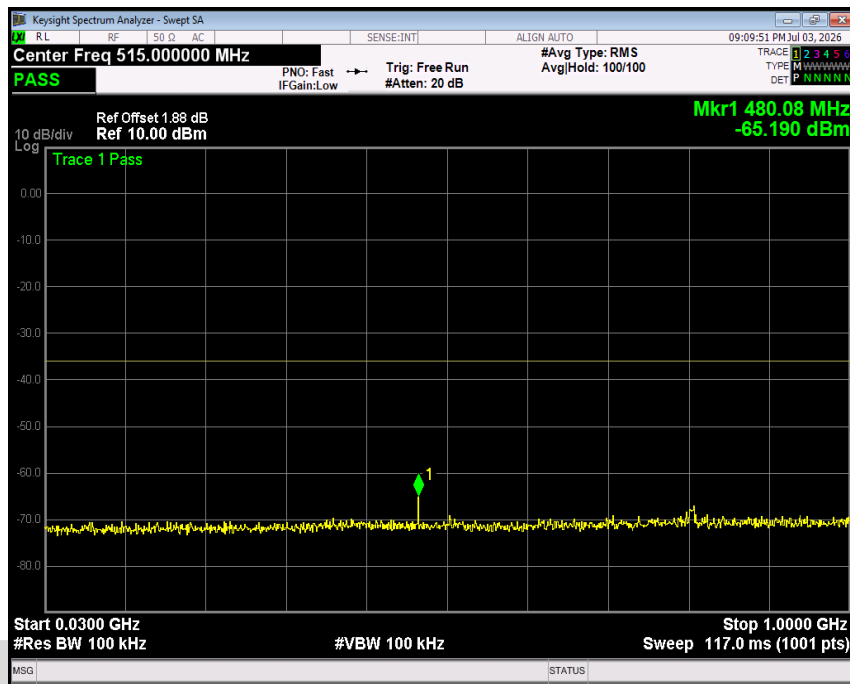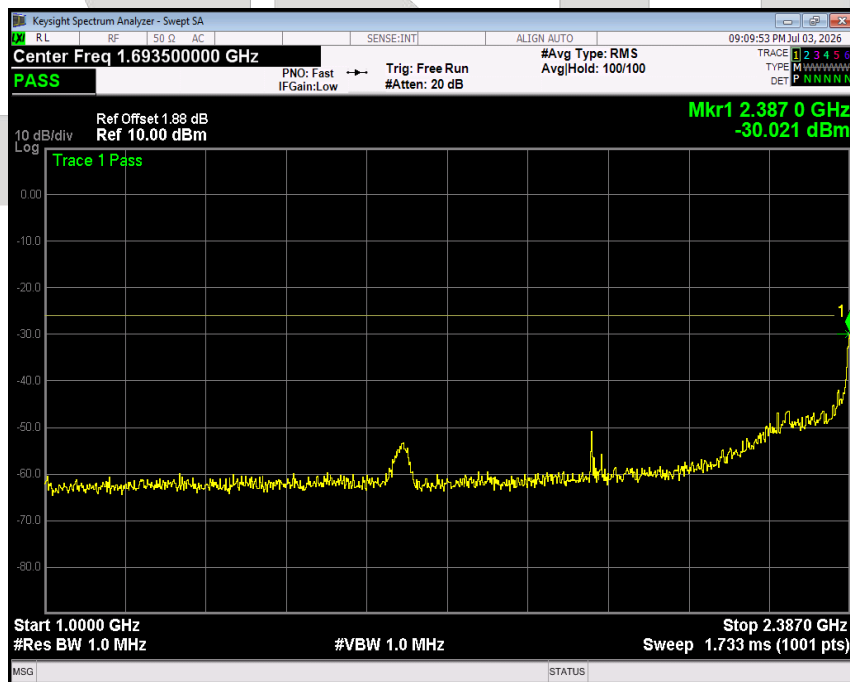 $30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$

 $1000 \text{ MHz} < f \leq 2387 \text{ MHz}$

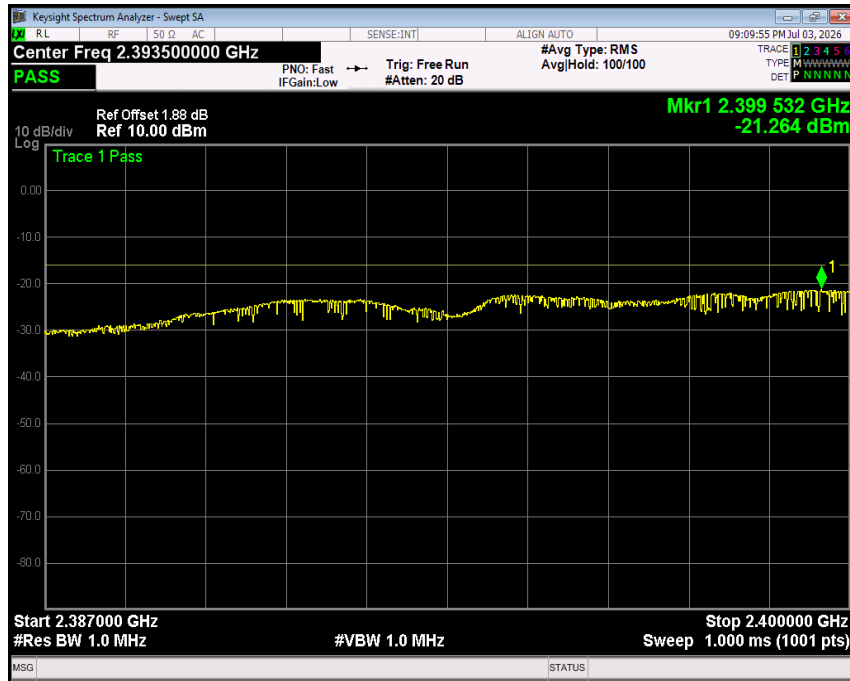
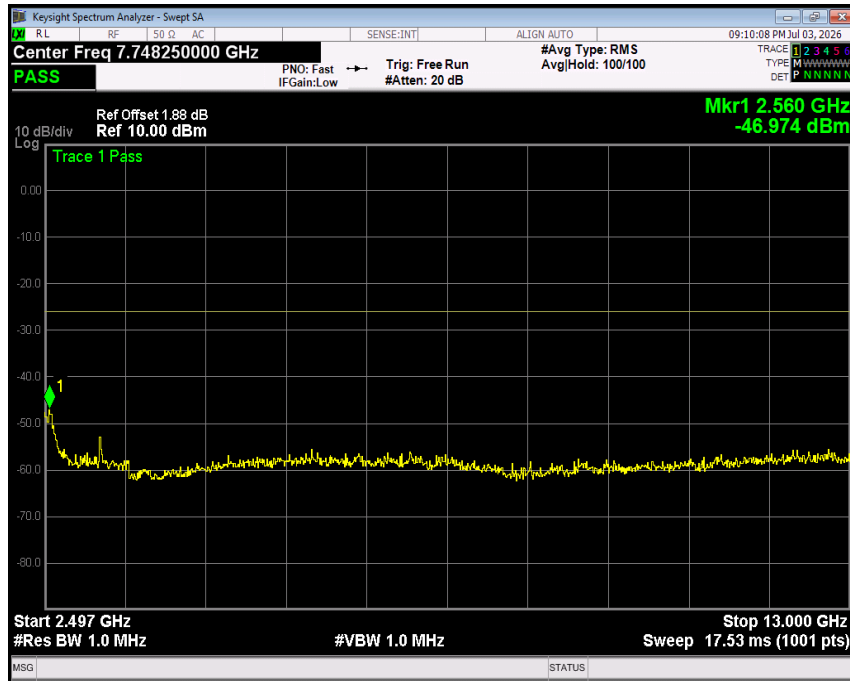
2387 MHz < f ≤ 2400 MHz

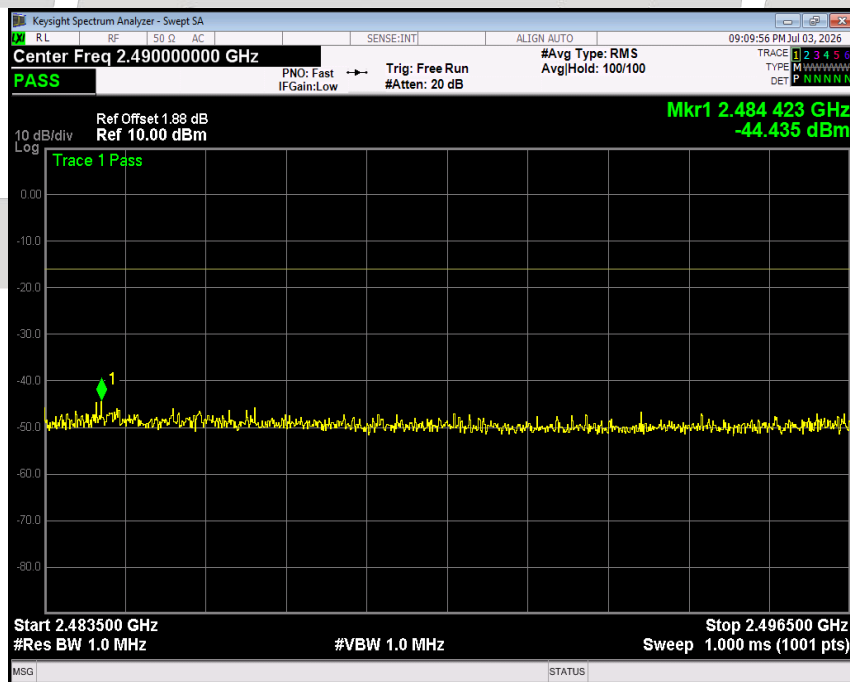

2483.5 MHz ≤ f < 2496.5 MHz




2496.5 MHz $\leq$ f < 13 GHz




Test voltage	Normal	Test Channel (MHz)	2442.00
--------------	--------	--------------------	---------


$$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$$

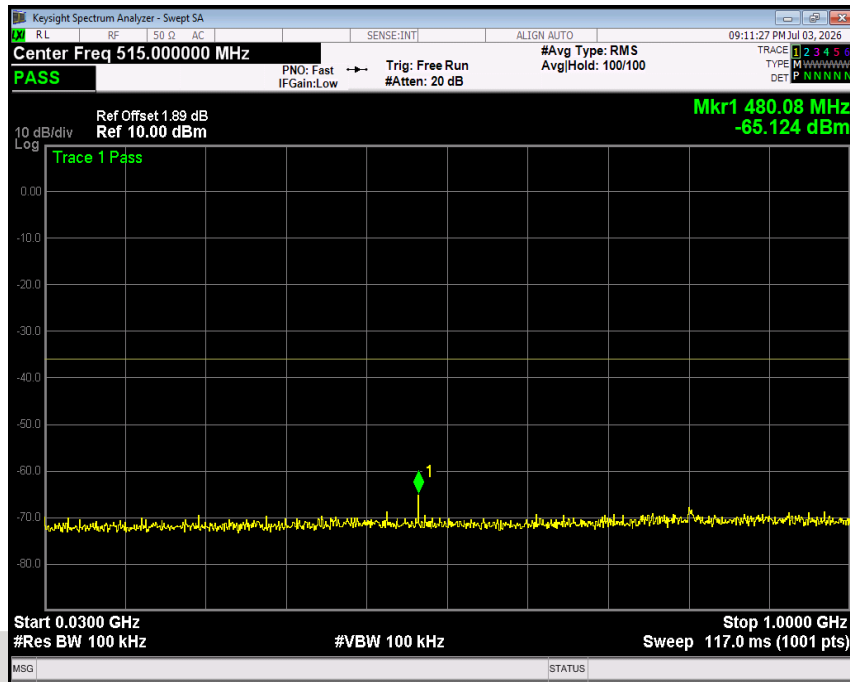


$$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$$

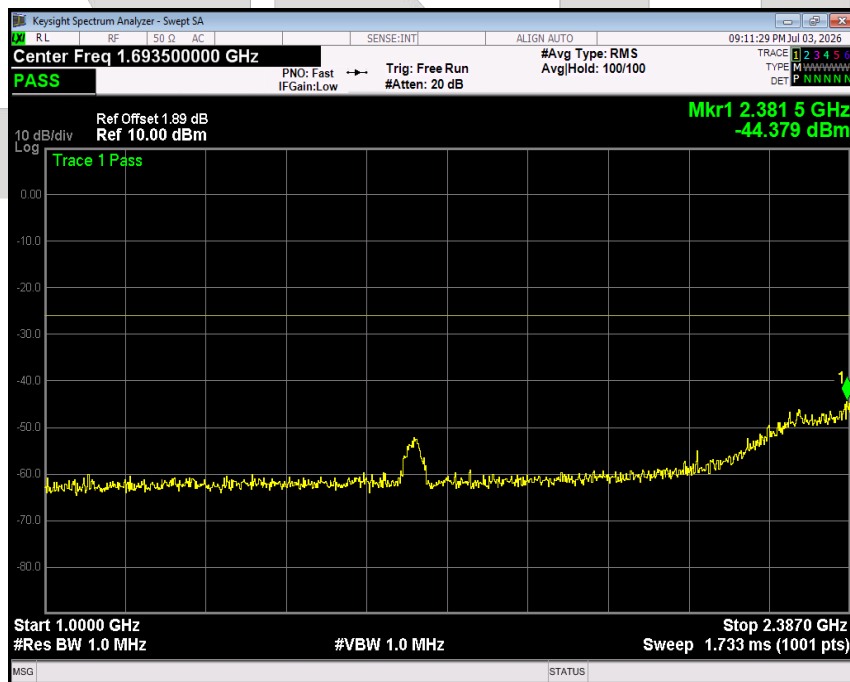


2387 MHz < f ≤ 2400 MHz

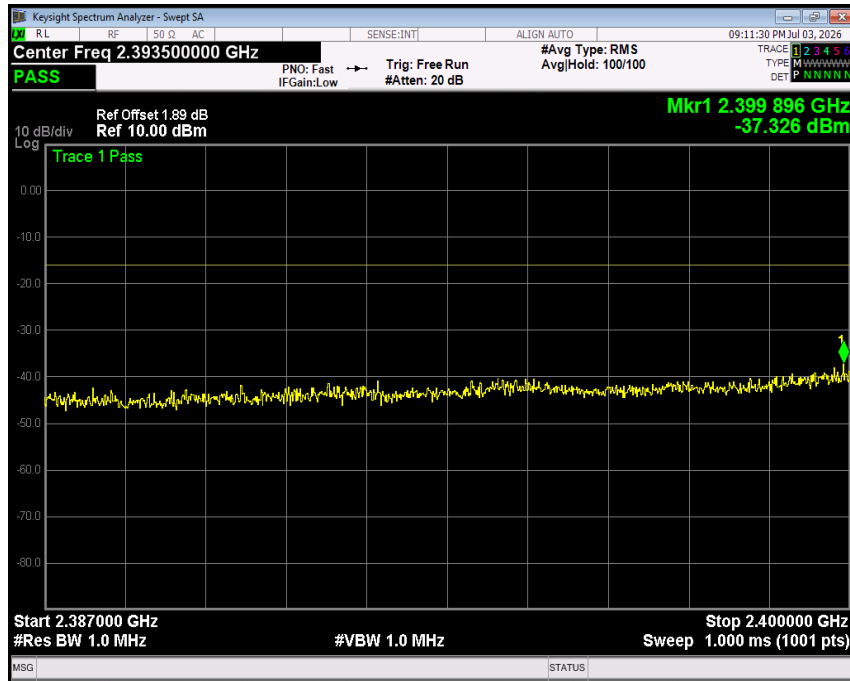

2483.5 MHz ≤ f < 2496.5 MHz

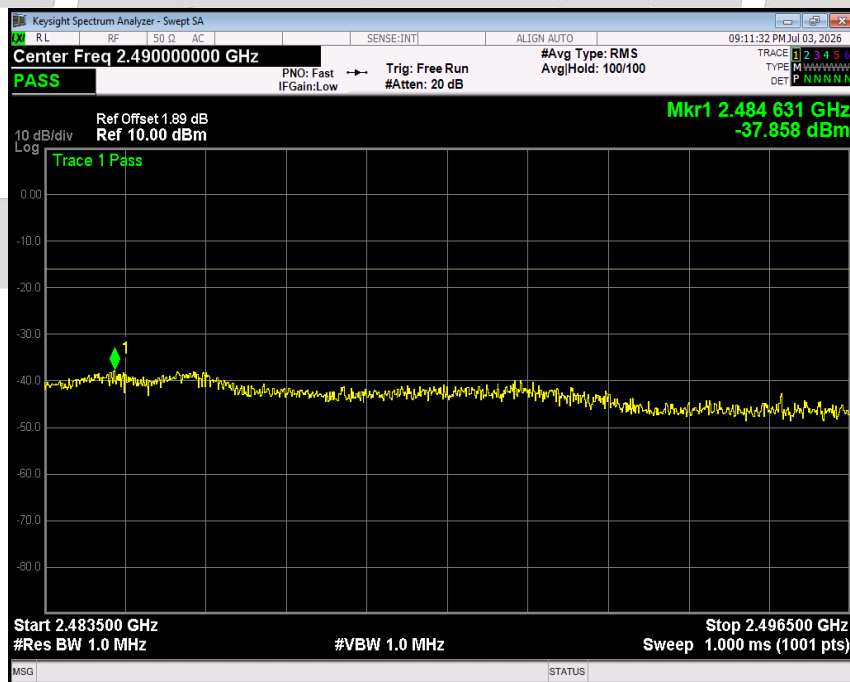


2496.5 MHz $\leq f < 13$ GHz

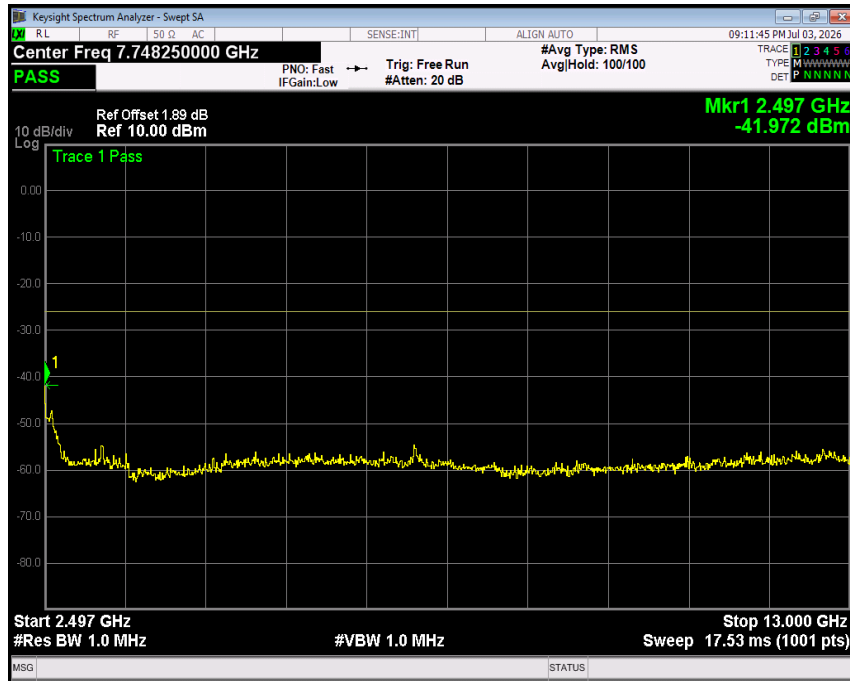


Test voltage	Normal	Test Channel (MHz)	2462.00
--------------	--------	--------------------	---------


$$30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$$

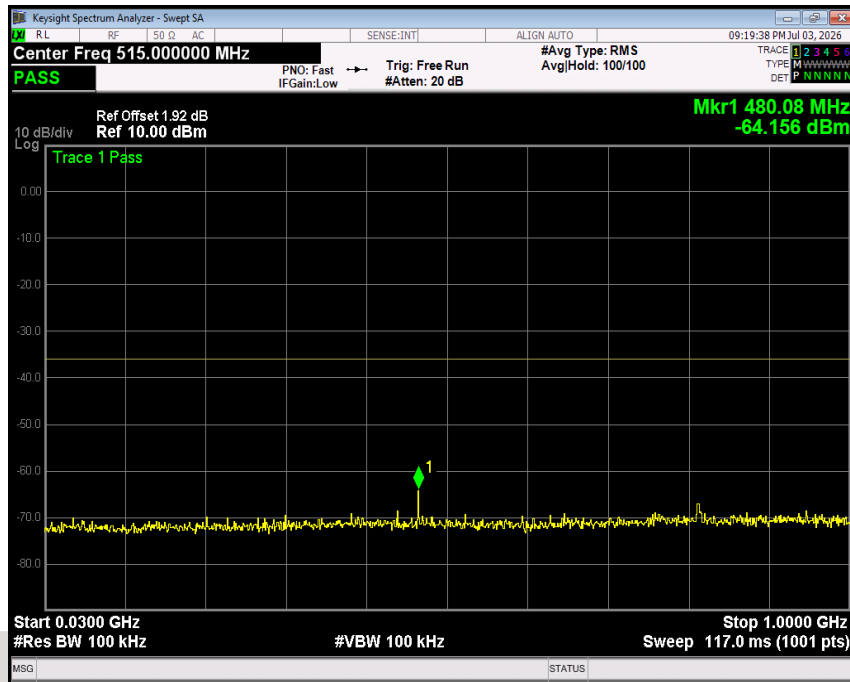


$$1000 \text{ MHz} < f \leq 2387 \text{ MHz}$$

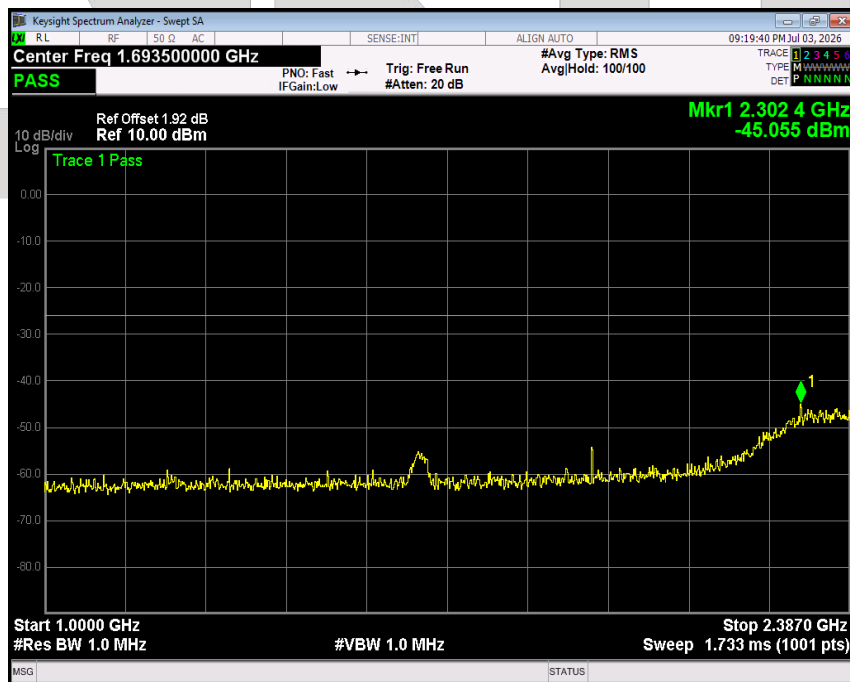


2387 MHz < f ≤ 2400 MHz

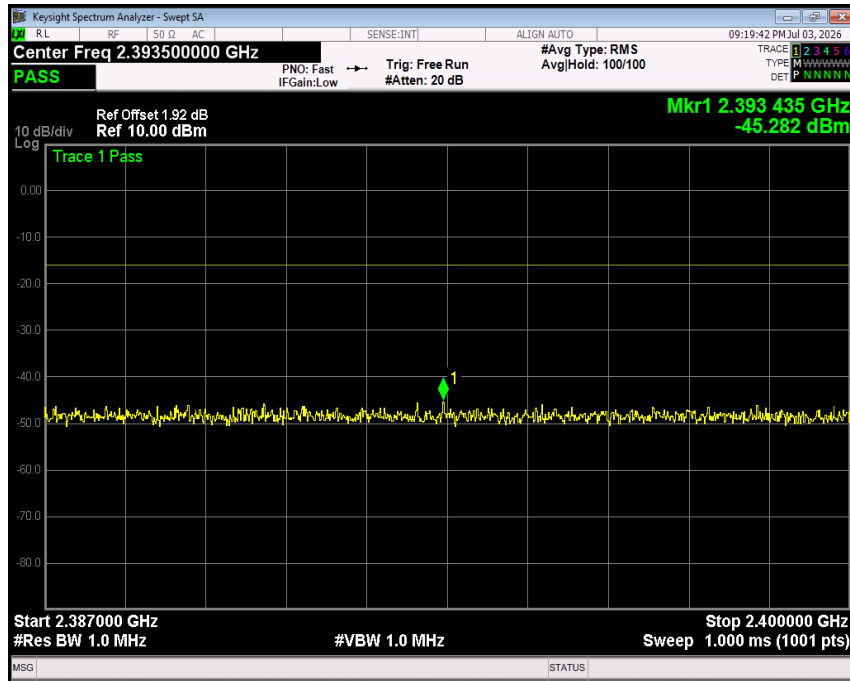

2483.5 MHz ≤ f < 2496.5 MHz

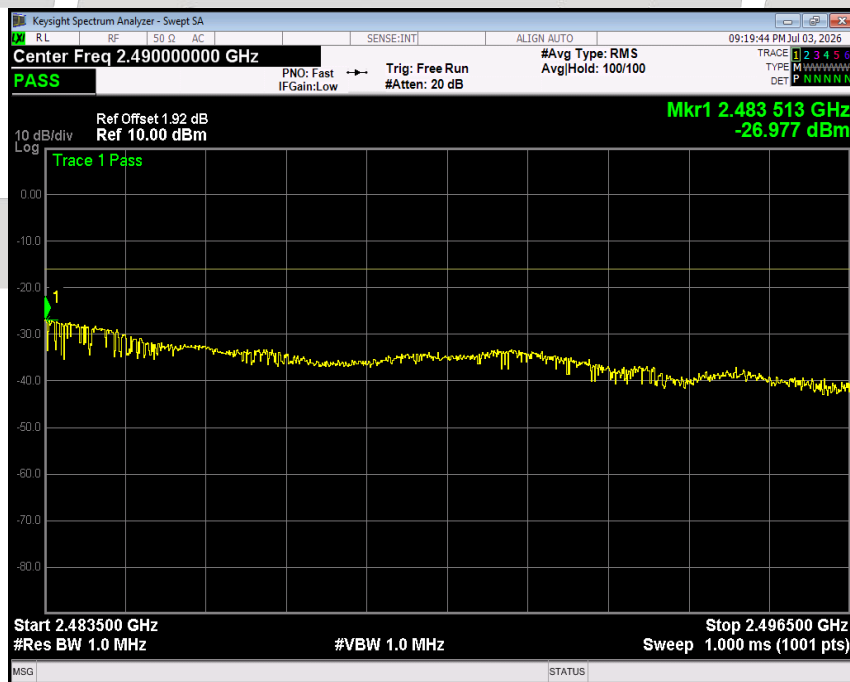

2496.5 MHz $\leq f < 13$ GHz

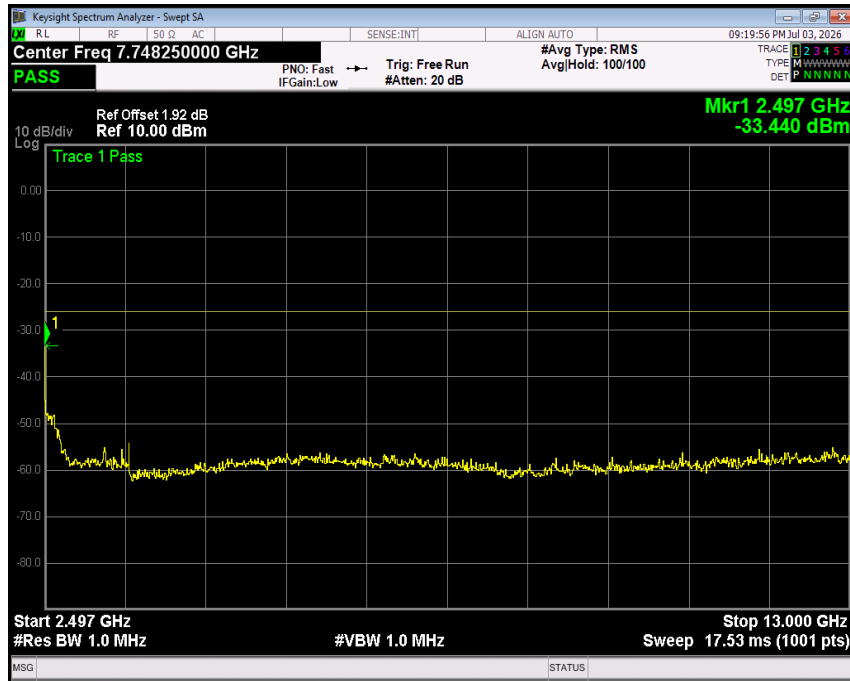

5.4 ANTENNA POWER ERROR MEASUREMENT & EIRP POWER

5.4.1 LIMIT

Item	Limits
Antenna Power Density	IEEE 802.11b/g/n20/ax20: 10mW/MHz IEEE 802.11 n40/ax40: 5mW/MHz
EIRP Power	IEEE 802.11b/g/n20/ax20: 12.14dBm/MHz IEEE 802.11n40/ax40: 9.14dBm/MHz
Antenna Power Error	+20% (No lower limit)

5.4.2 TEST PROCEDURES

Step 1: Connect the EUT to the Spectrum analyser and use the following settings:

Centre Frequency: The Centre frequency of the channel under test.

RBW: 1 MHz.

VBW: 1 MHz.

Span: Wide enough to cover the complete power envelope of the signal of the EUT.

Detector: Peak.

Trace Mode: Max Hold.

Step 2: When the trace is complete, find the peak value of the power envelope and record the frequency.

Step 3: Make the following changes to the settings of the Spectrum analyser:

Centre Frequency: Equal to the frequency recorded in step 2.

Span: 0 Hz.

RBW: 1 MHz.


VBW: 1 MHz.

Detector: RMS (see note).

Trace Mode: Clear

Capture the timedomain burst power

5.4.3 TEST SETUP LAYOUT

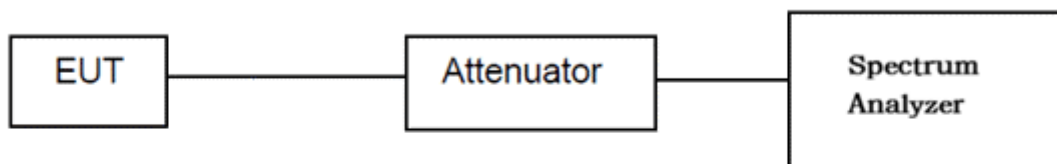

5.4.4 EST DEVIATION


There is no deviation with the original standard.

5.4.5 EUT OPERATION DURING TEST


The EUT was programmed to be in continuously transmitting mode.

5.4.6 TEST RESULT


Test Frequency (MHz)	Antenna Power (dBm/MHz)	Antenna Power (mW/MHz)	Rated power density (mW/MHz)	Antenna Power Limits (mW/MHz)	Tolerance (%)	Tolerance Limit (%)	RESULT
Operation Mode:	Normal Voltage-IEEE 802.11b						
2412	4.48	2.805	3	≤10	-6.50	+ 20	PASS
2442	4.01	2.518	3	≤10	-16.07	+ 20	PASS
2472	4.34	2.719	3	≤10	-9.37	+ 20	PASS
Operation Mode:	Normal Voltage-IEEE 802.11g						
2412	3.79	2.393	3	≤10	-20.22	+ 20	PASS
2442	3.75	2.371	3	≤10	-20.95	+ 20	PASS
2472	3.47	2.223	3	≤10	-25.89	+ 20	PASS
Operation Mode:	Normal Voltage-IEEE 802.11n20						
2412	2.75	1.884	2	≤10	-5.82	+ 20	PASS
2442	2.3	1.698	2	≤10	-15.09	+ 20	PASS
2472	2.55	1.799	2	≤10	-10.06	+ 20	PASS
Operation Mode:	Normal Voltage-IEEE 802.11n40						
2422	-1.62	0.689	1	≤5	-31.13	+ 20	PASS
2442	-1.06	0.783	1	≤5	-21.66	+ 20	PASS
2462	-1.74	0.67	1	≤5	-33.01	+ 20	PASS
Operation Mode:	Normal Voltage-IEEE 802.11ax20						
2412	2.91	1.954	2	≤10	-2.28	+ 20	PASS
2442	2.87	1.936	2	≤10	-3.18	+ 20	PASS
2472	2.54	1.795	2	≤10	-10.26	+ 20	PASS
Operation Mode:	Normal Voltage-IEEE 802.11ax40						
2422	-1.2	0.759	1	≤5	-24.14	+ 20	PASS
2442	-1.58	0.695	1	≤5	-30.50	+ 20	PASS
2462	-1.95	0.638	1	≤5	-36.17	+ 20	PASS
Tolerance Limit : +20% (No lower limit)							

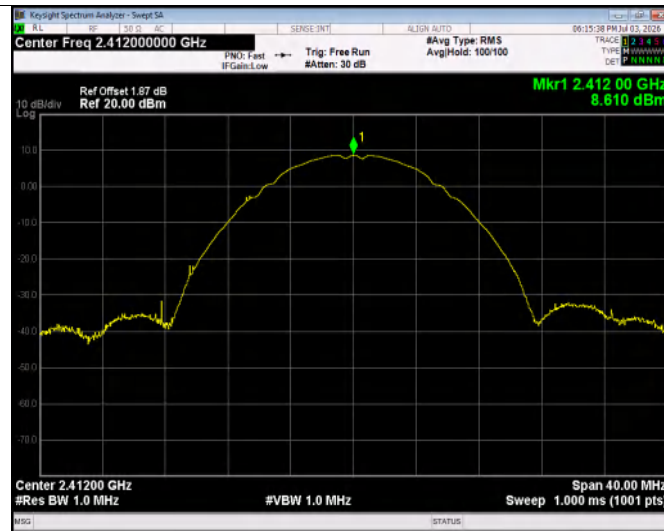


b 2412MHz

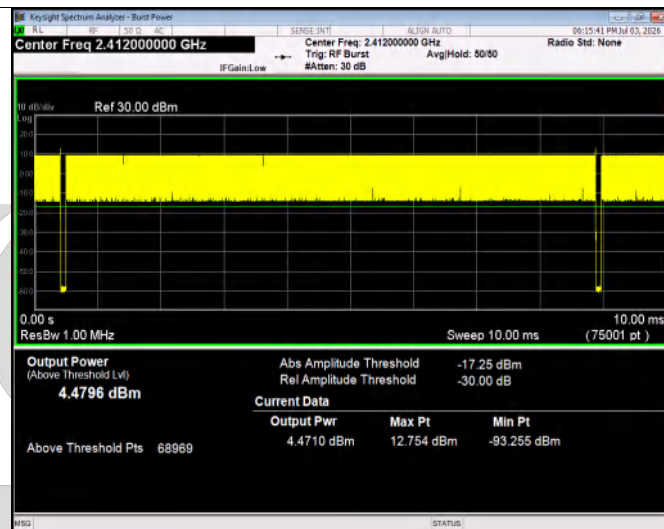


b 2412MHz Zero Span

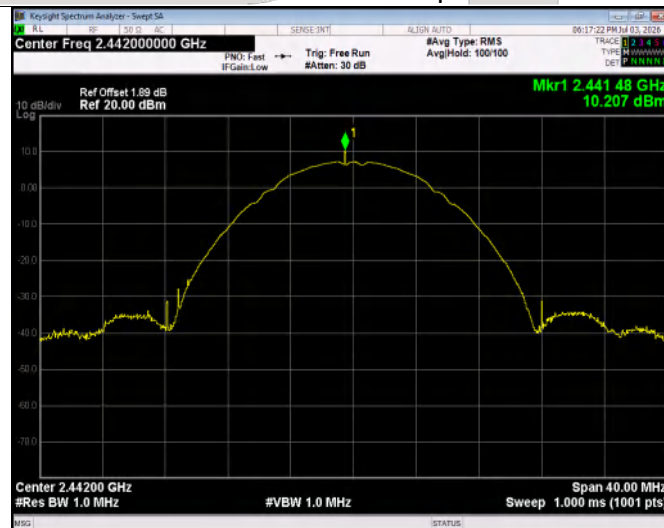


b 2442MHz

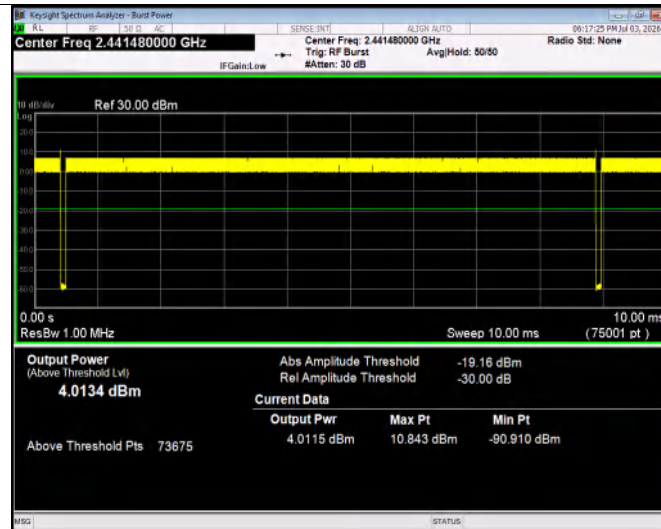


b 2442MHz Zero Span

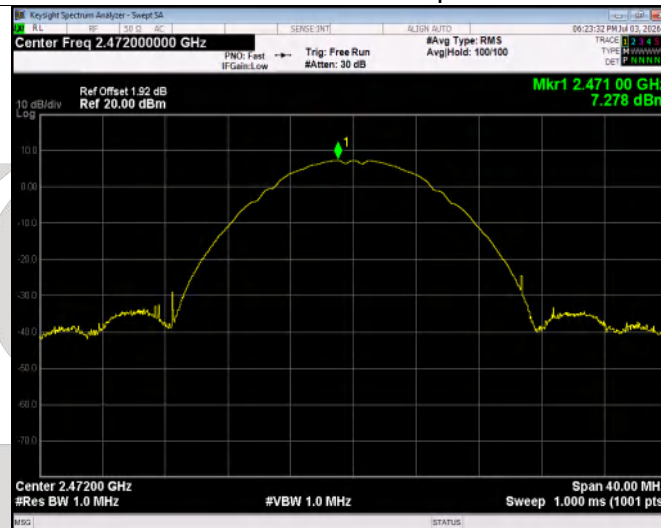


b 2472MHz

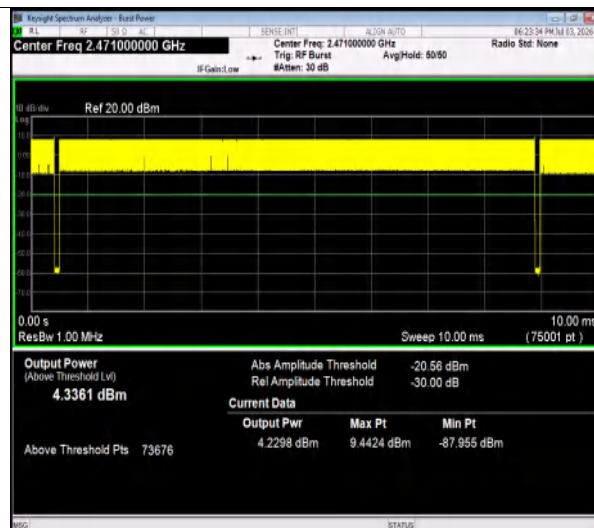


b 2472MHz Zero Span

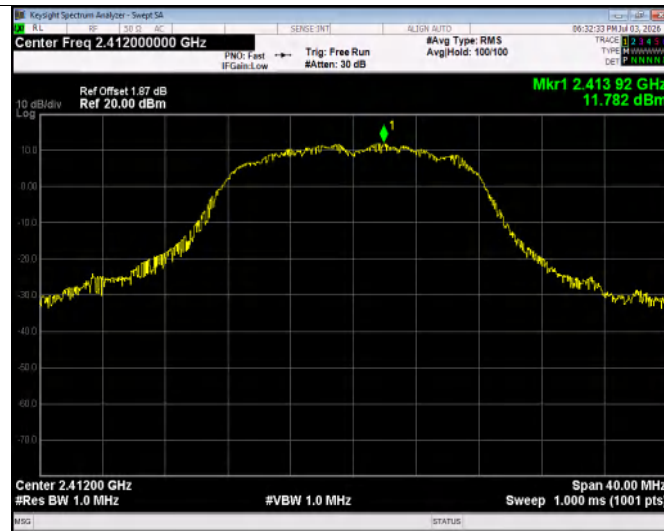


g 2412MHz

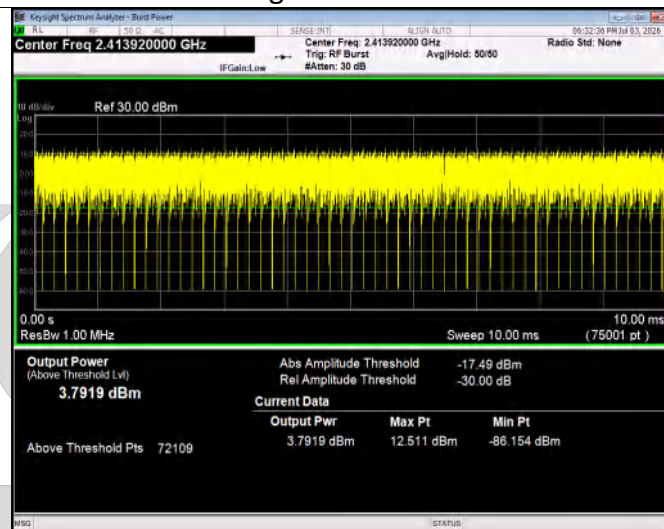


g 2412MHz Zero Span

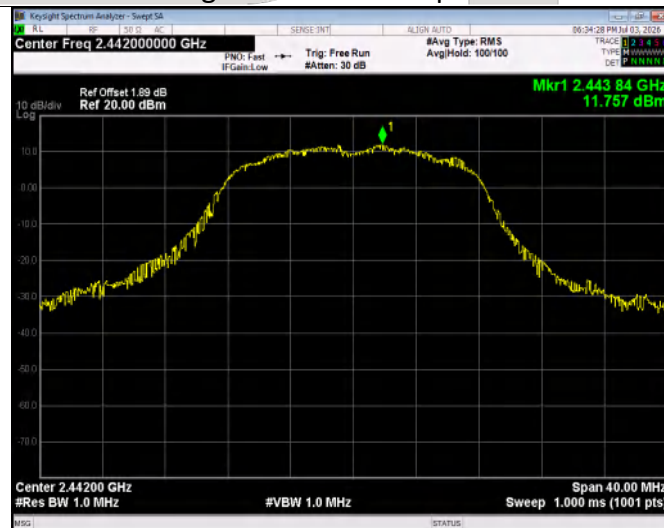

g 2442MHz

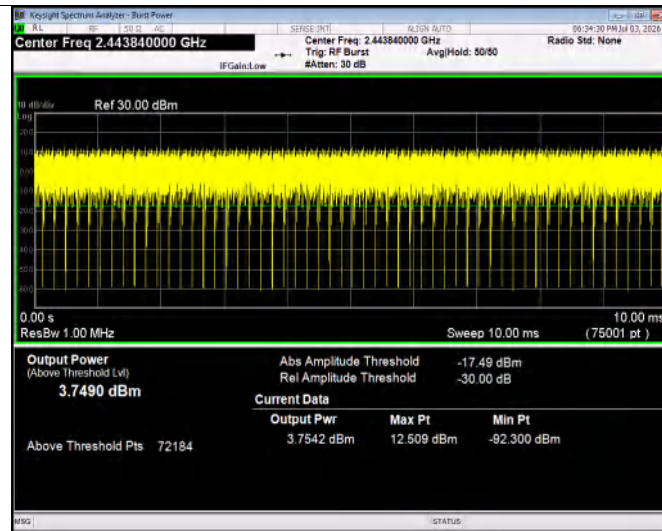


g 2442MHz Zero Span

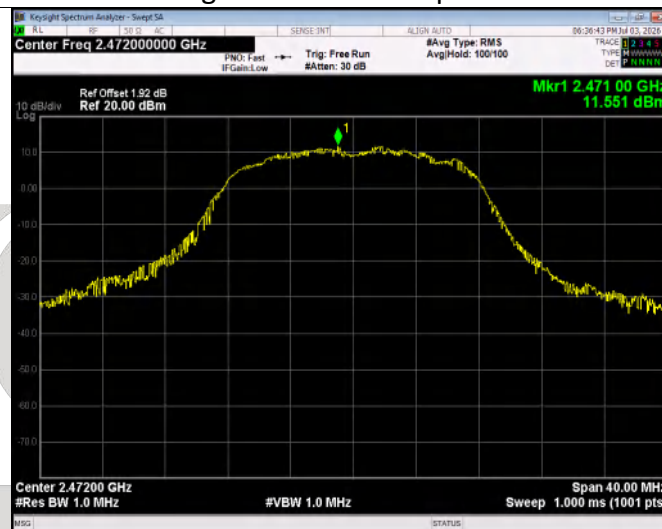


g 2472MHz




g 2472MHz Zero Span

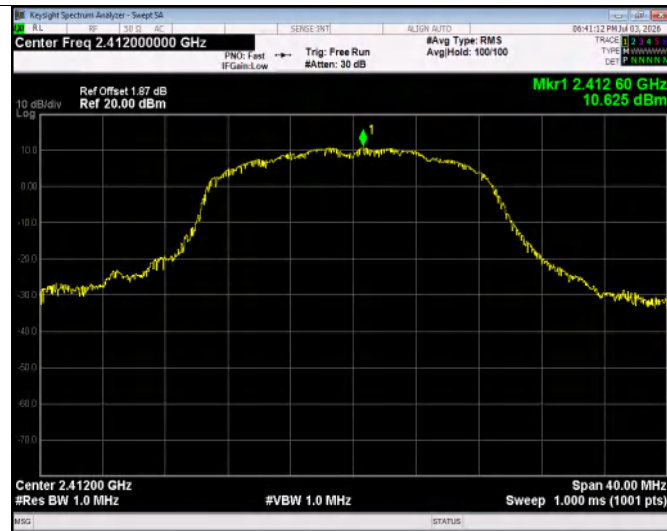


n20 2412MHz

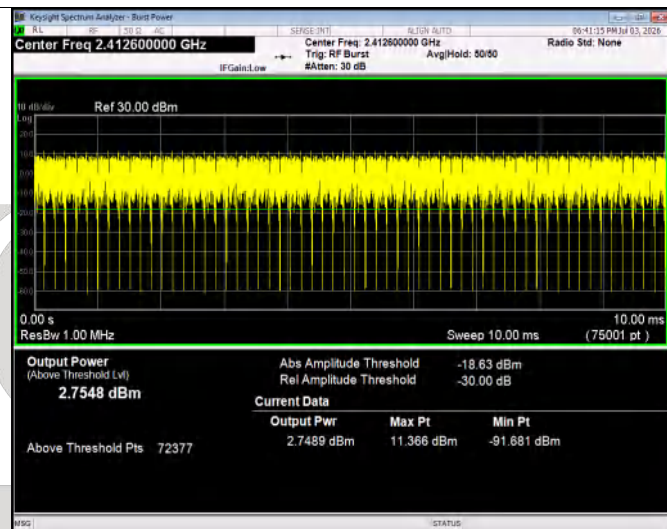


n20 2412MHz Zero Span

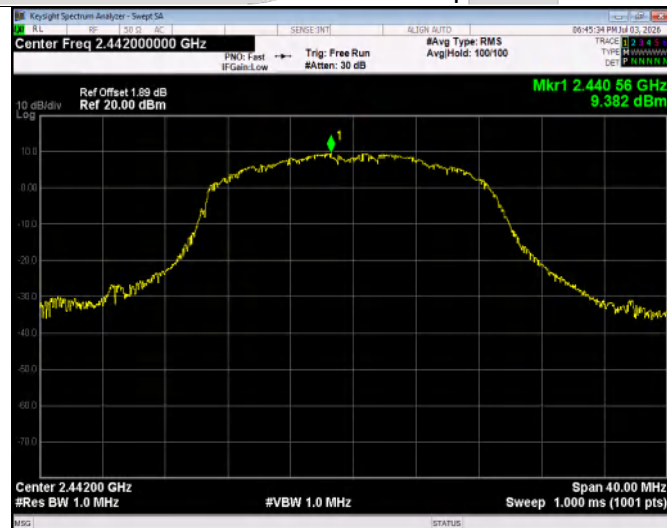


n20 2442MHz

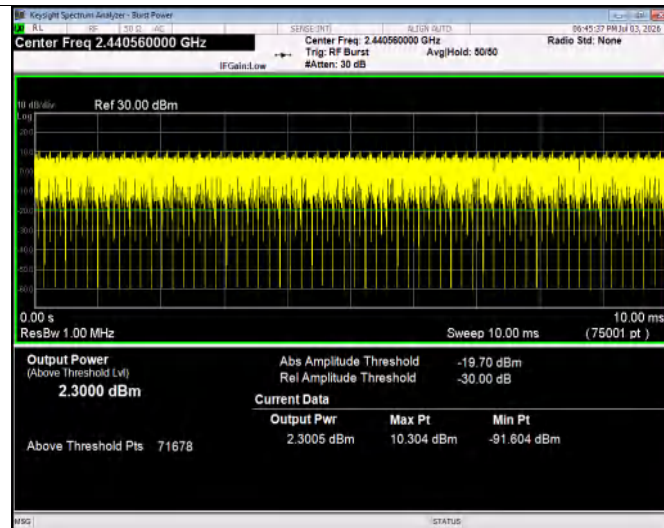

n20 2442MHz Zero Span

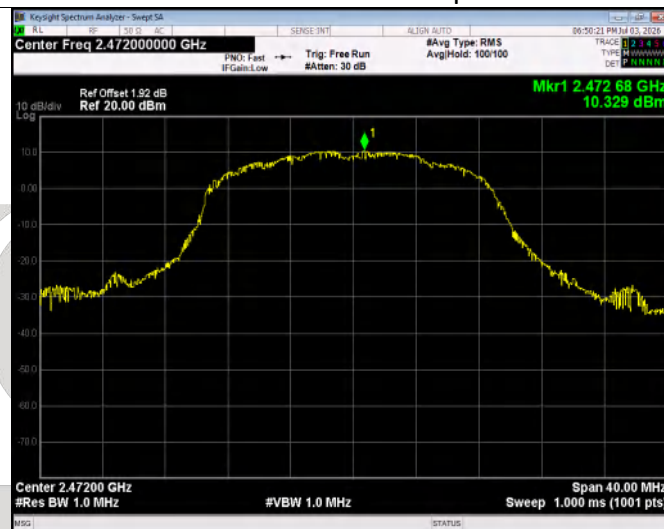


n20 2472MHz

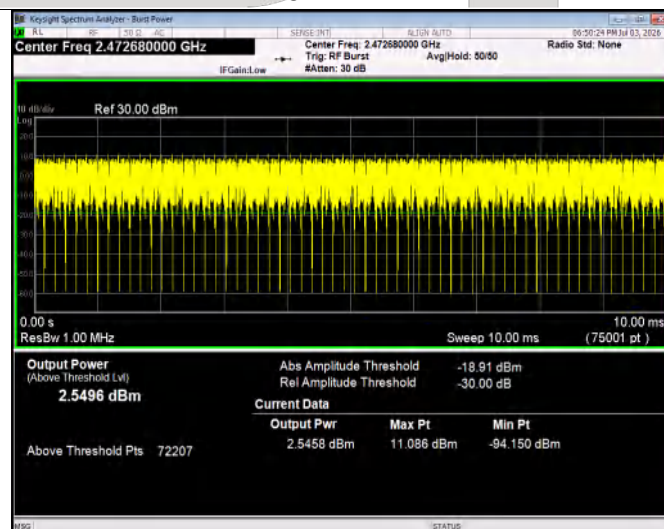

n20 2472MHz Zero Span




n40 2422MHz

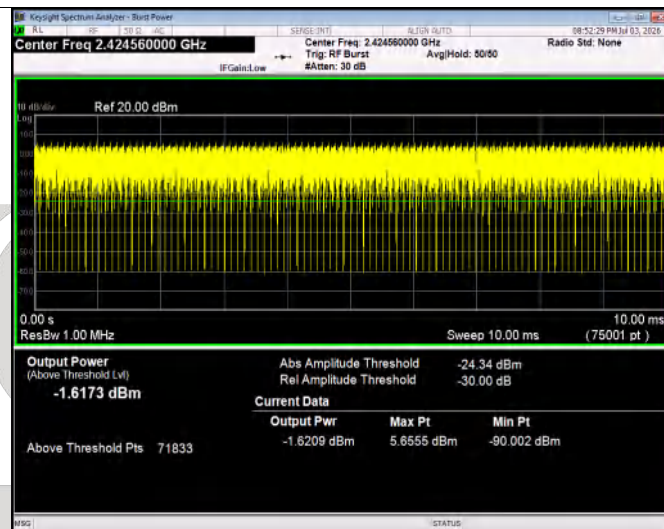


n40 2422MHz Zero Span



n40 2442MHz

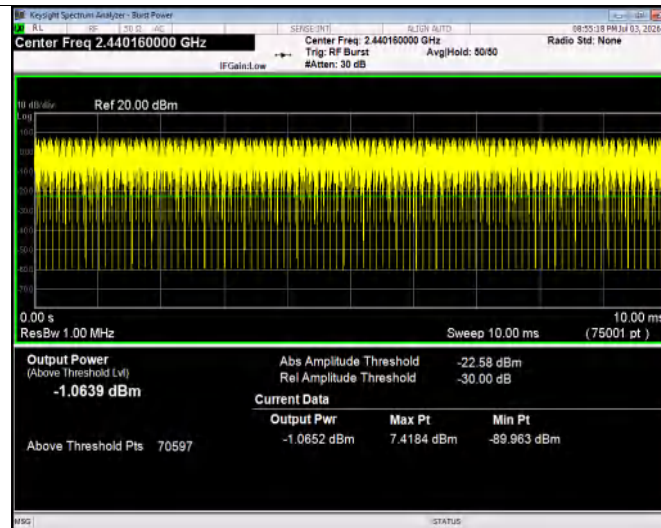


n40 2442MHz Zero Span

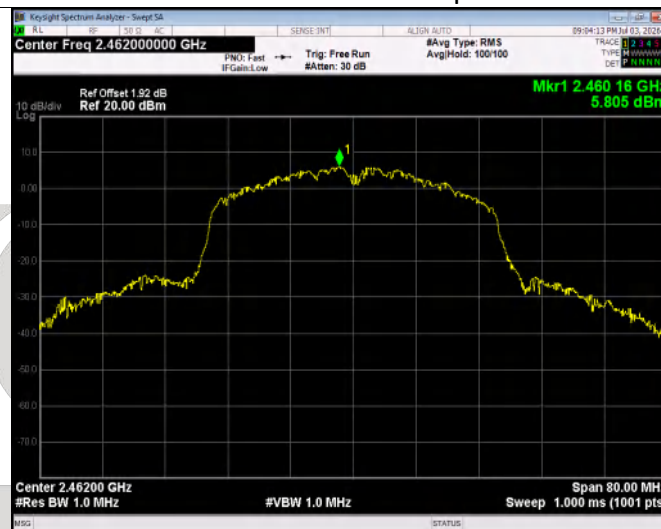


n40 2462MHz




n40 2462MHz Zero Span

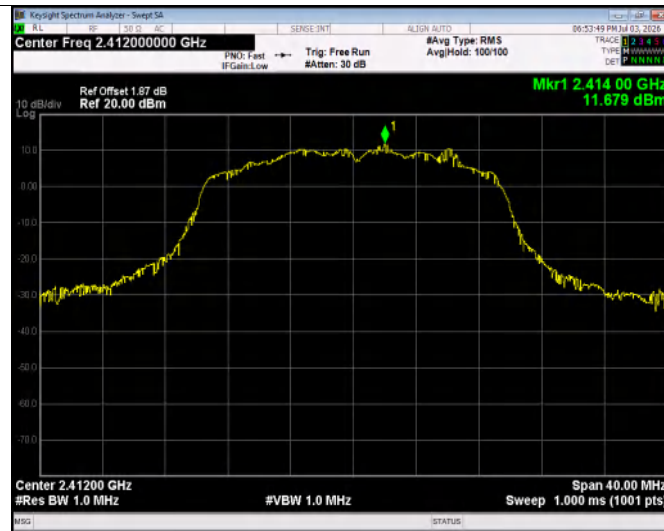


ax20 2412MHz

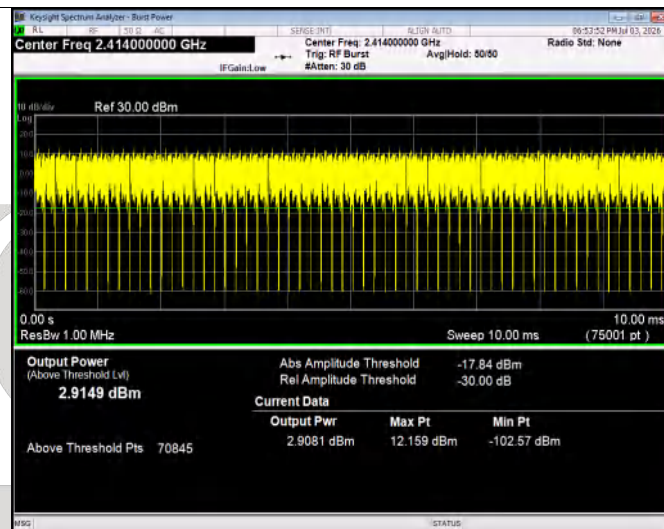


ax20 2412MHz Zero Span

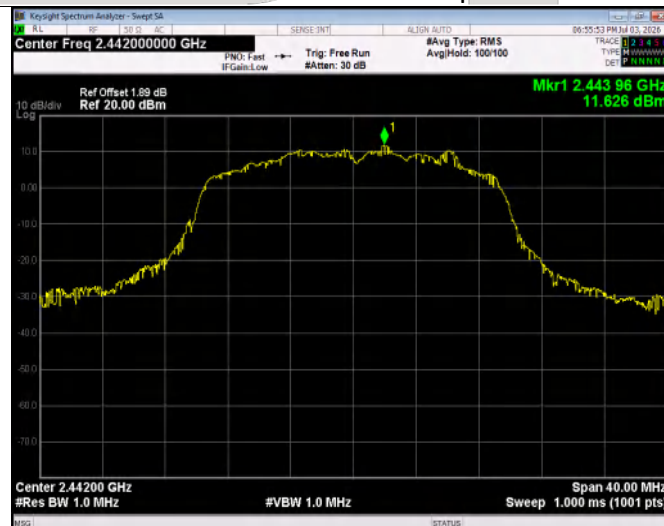


ax20 2442MHz

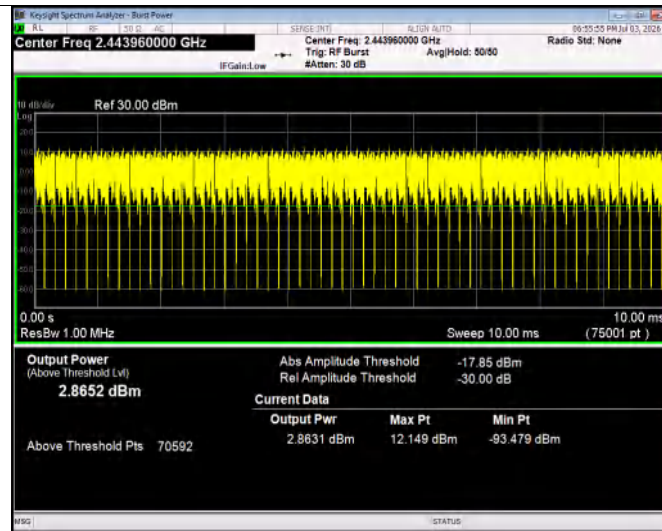

ax20 2442MHz Zero Span

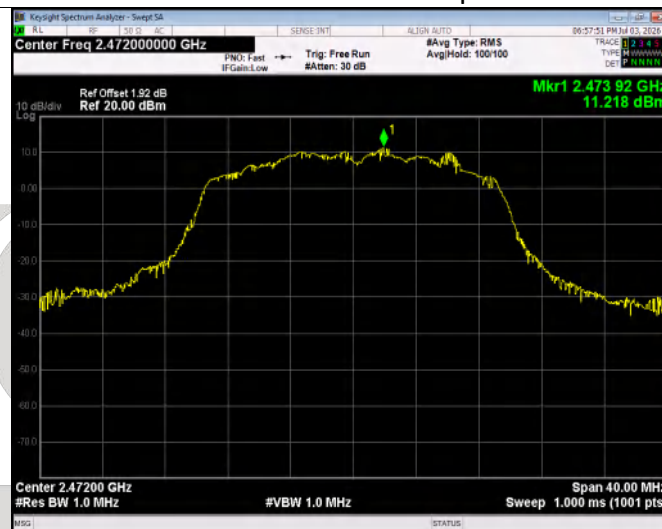


ax20 2472MHz

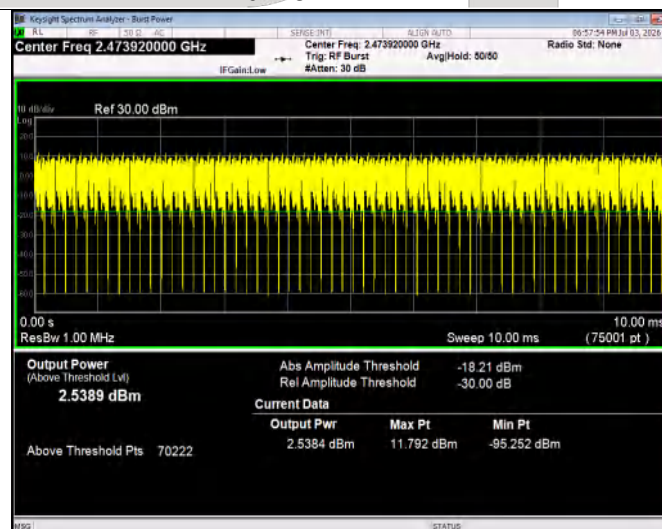


ax20 2472MHz Zero Span




ax40 2422MHz

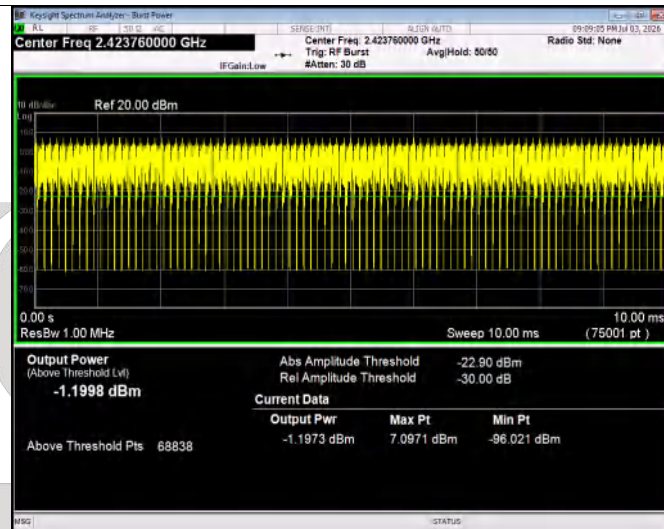


ax40 2422MHz Zero Span

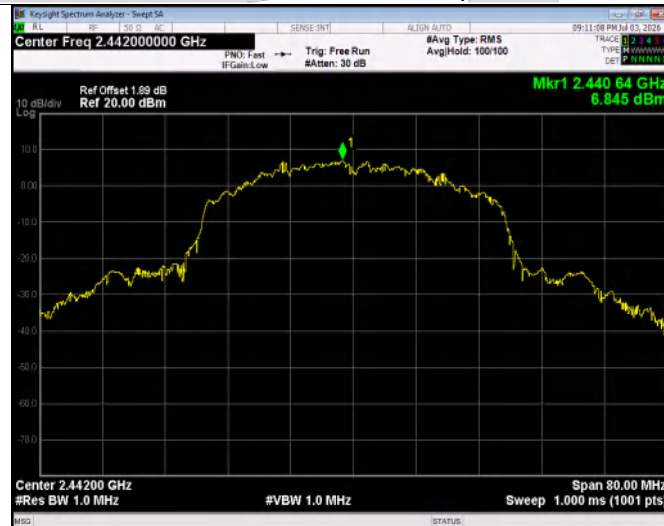

ax40 2442MHz

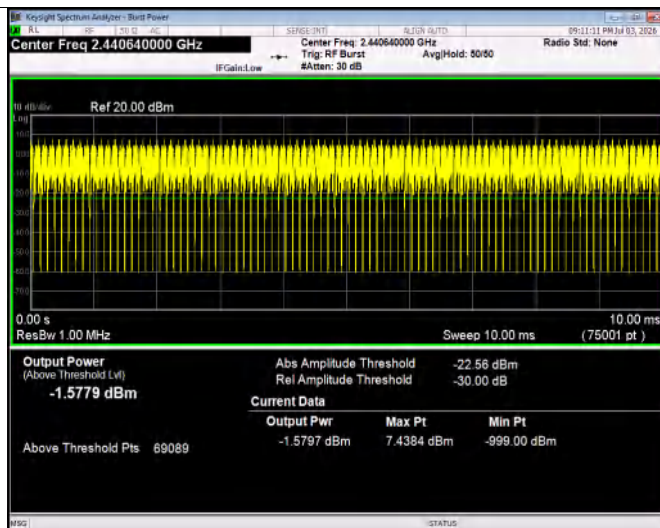

ax40 2442MHz Zero Span

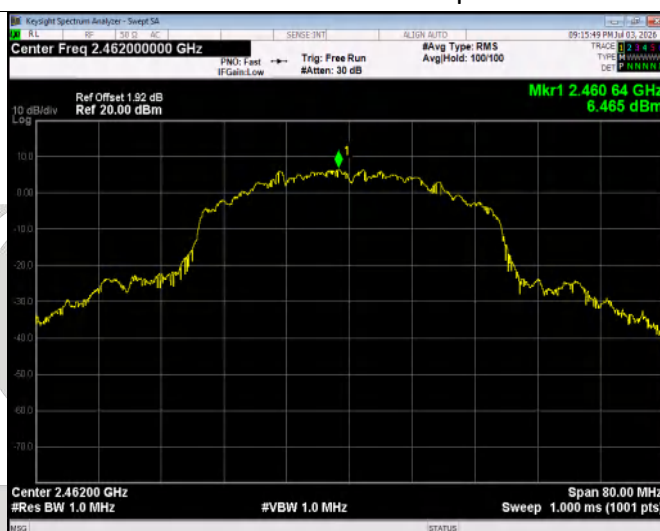

ax40 2462MHz



ax40 2462MHz Zero Span

Test Frequency (MHz)	Antenna Power (dBm/MHz)	Antenna gain (dBi)	EIRP Power (dBm/MHz)	Limits (dBm/MHz)	RESULT
Operation Mode:	Normal Voltage-IEEE 802.11b				
2412	4.48	1.48	5.96	≤12.14	PASS
2442	4.01	1.48	5.49	≤12.14	PASS
2472	4.34	1.48	5.82	≤12.14	PASS
Operation Mode:	Normal Voltage-IEEE 802.11g				
2412	3.79	1.48	5.27	≤12.14	PASS
2442	3.75	1.48	5.23	≤12.14	PASS
2472	3.47	1.48	4.95	≤12.14	PASS
Operation Mode:	Normal Voltage-IEEE 802.11n20				
2412	2.75	1.48	4.23	≤12.14	PASS
2442	2.3	1.48	3.78	≤12.14	PASS
2472	2.55	1.48	4.03	≤12.14	PASS
Operation Mode:	Normal Voltage-IEEE 802.11n40				
2412	-1.62	1.48	-0.14	≤9.14	PASS
2442	-1.06	1.48	0.42	≤9.14	PASS
2472	-1.74	1.48	-0.26	≤9.14	PASS
Operation Mode:	Normal Voltage-IEEE 802.11ax20				
2412	2.91	1.48	4.39	≤12.14	PASS
2442	2.87	1.48	4.35	≤12.14	PASS
2472	2.54	1.48	4.02	≤12.14	PASS
Operation Mode:	Normal Voltage-IEEE 802.11ax40				
2422	-1.2	1.48	0.28	≤9.14	PASS
2442	-1.58	1.48	-0.1	≤9.14	PASS
2462	-1.95	1.48	-0.47	≤9.14	PASS

Note: EIRP Power = Antenna Power (dBm/MHz) + Antenna Gain.

5.5 IMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT

5.5.1 LIMIT

Item	Limits
RX Spurious Emission:	$\leq 4\text{nW}$ ($f < 1\text{GHz}$)
	$\leq 20\text{nW}$ ($1\text{GHz} \leq f$)

5.5.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
VB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.5.3 TEST PROCEDURES

- EUT have the continuous reception mode and fixed only one channelize.
- Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1MHz (above 1GHz emissions) / AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
- SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
- If power level of lower emissions are more than 1/10 of limit (.0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.

5.5.4 TEST SETUP LAYOUT

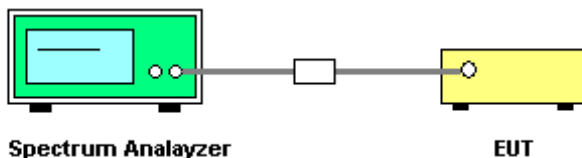

5.5.6 TEST DEVIATION

There is no deviation with the original standard.

5.5.7 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously reception mode.



5.5.8 TEST RESULT

Test Voltage	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Max Value (nW)	Limit (nW)	Verdict
Normal	802.11b	2442	30-1000	838.01	-78.68	0.0136	4	Pass
Normal	802.11b	2442	1000-12500	3400.00	-58.32	1.4723	20	Pass
Normal	802.11g	2442	30-1000	809.88	-79.02	0.0125	4	Pass
Normal	802.11g	2442	1000-12500	12784.00	-65.95	0.2541	20	Pass
Normal	802.11n20	2442	30-1000	483.96	-79.05	0.0124	4	Pass
Normal	802.11n20	2442	1000-12500	12724.00	-65.63	0.2735	20	Pass
Normal	802.11n40	2442	30-1000	799.21	-78.73	0.0134	4	Pass
Normal	802.11n40	2442	1000-12500	5692.00	-66.22	0.2388	20	Pass
Normal	802.11ax20	2442	30-1000	774.96	-78.69	0.0135	4	Pass
Normal	802.11ax20	2442	1000-12500	12100.00	-65.26	0.2979	20	Pass
Normal	802.11ax40	2442	30-1000	915.61	-78.52	0.0141	4	Pass
Normal	802.11ax40	2442	1000-12500	12724.00	-65.04	0.3133	20	Pass

Note: All channels are tested , only the worst test data recorded was 2442MHz.



Modulation type: 802.11b

Test voltage	Normal	Test Channel	2442MHz
--------------	--------	--------------	---------

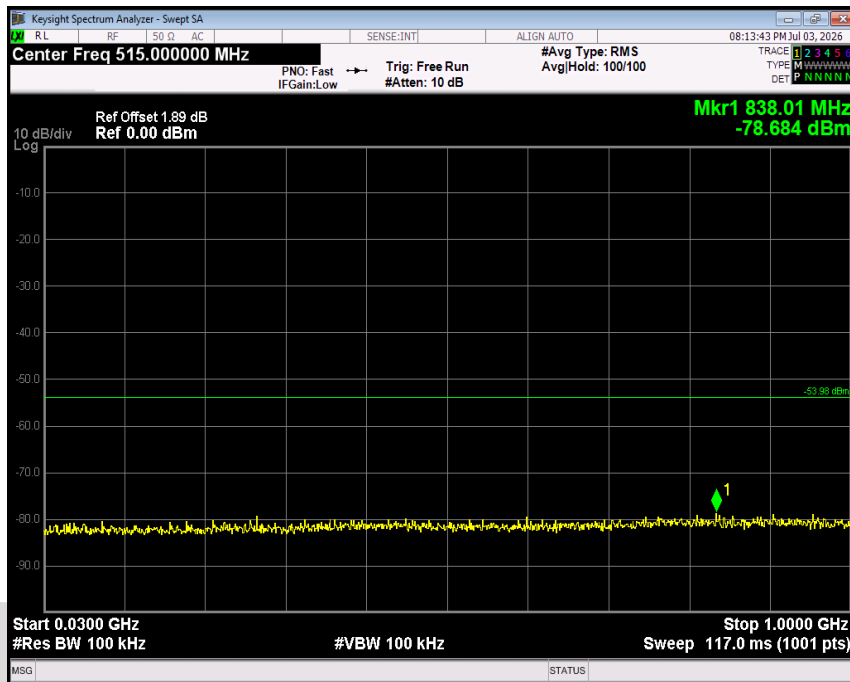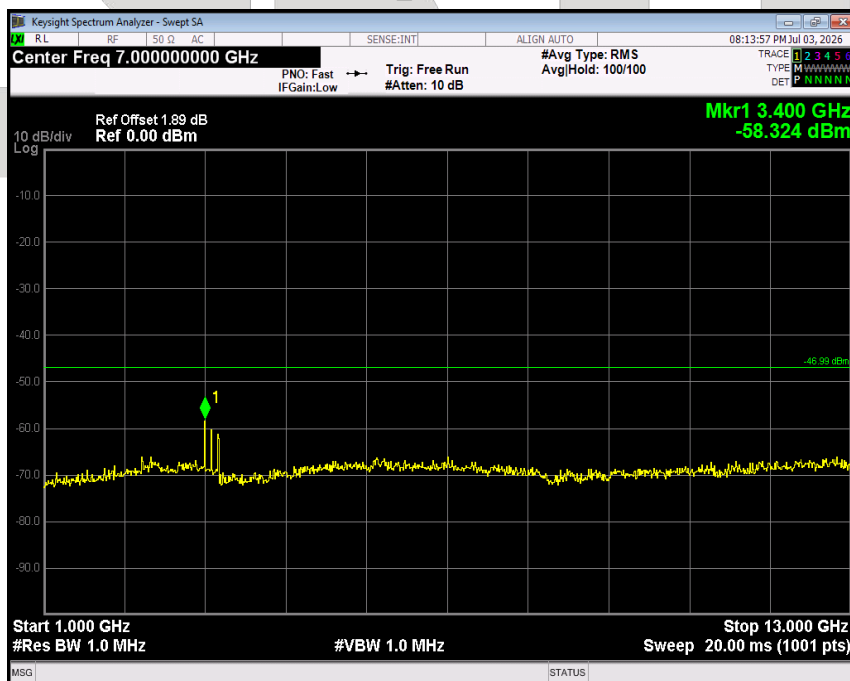 $30 \text{ MHz} \leq f < 1000 \text{ MHz}$

 $1000 \text{ MHz} \leq f < 12500 \text{ MHz}$


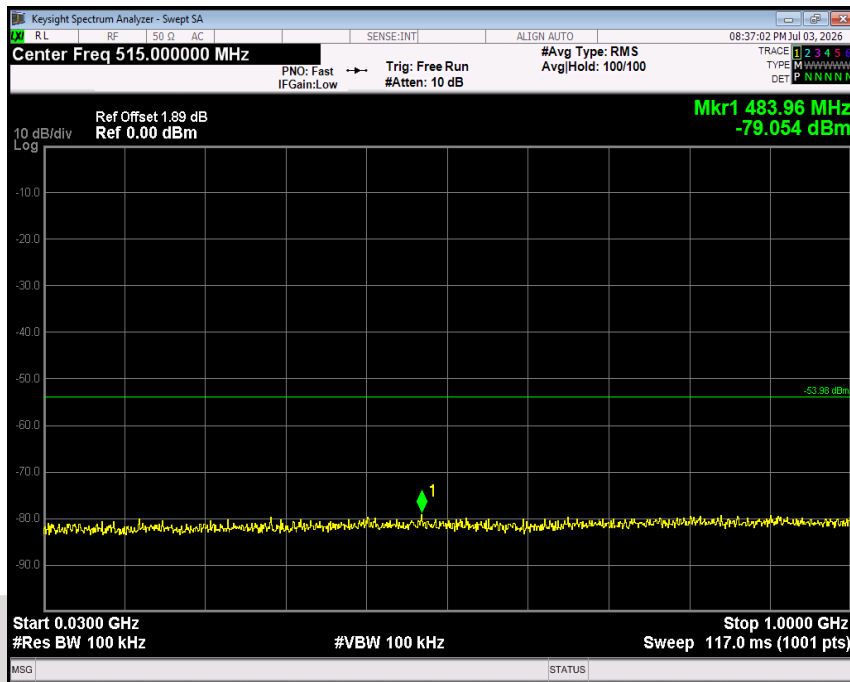
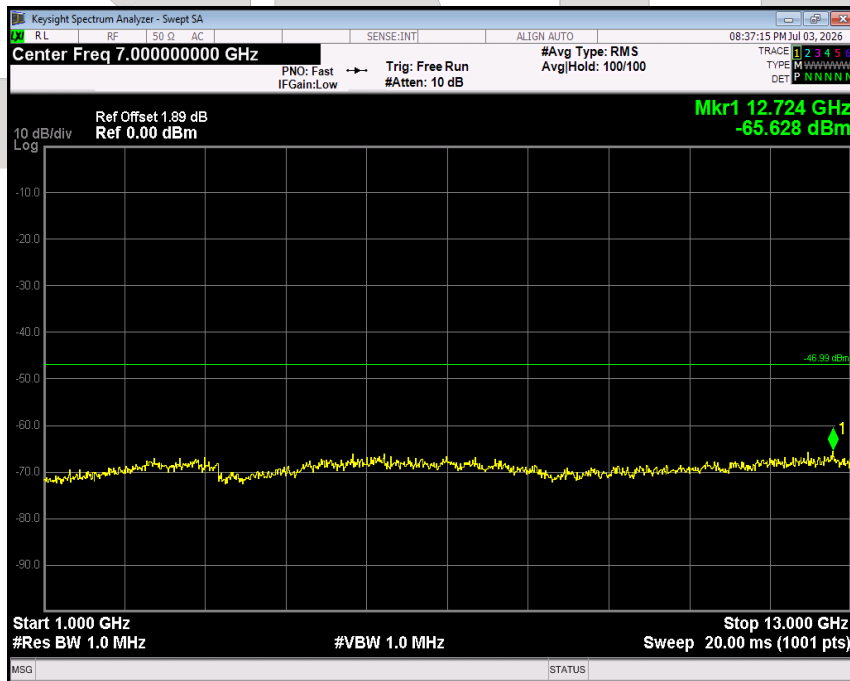
Modulation type: 802.11g

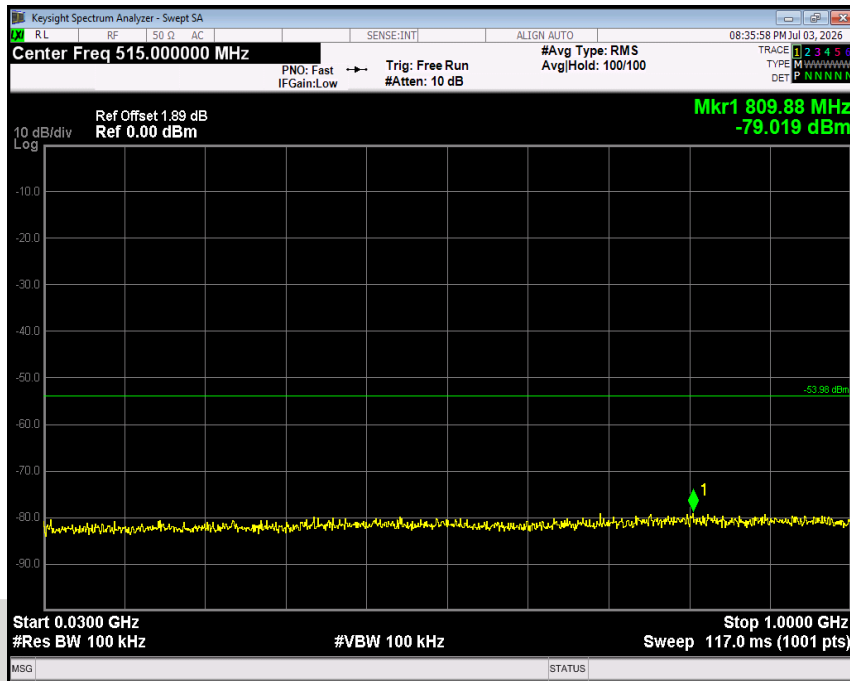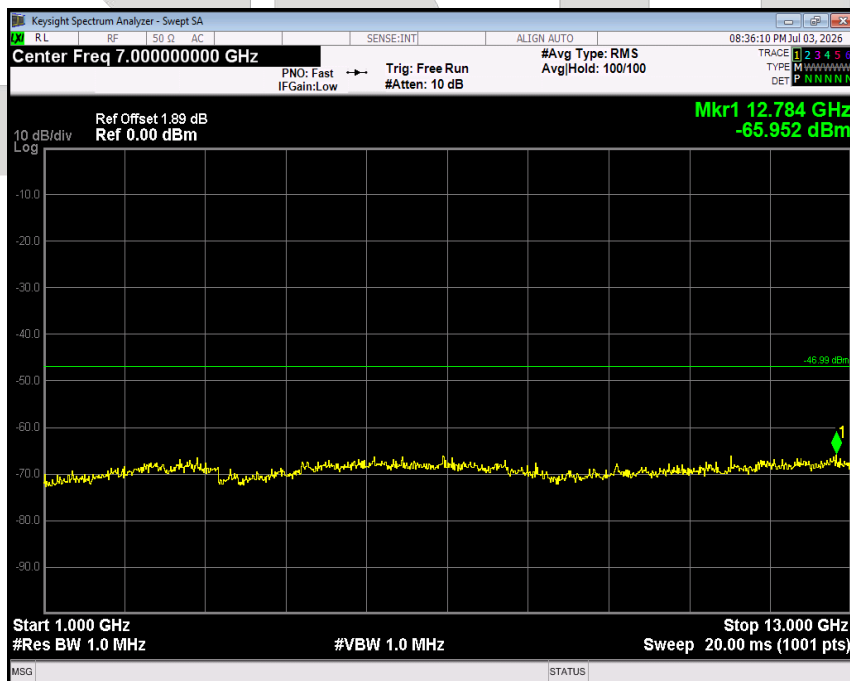Test voltage	Normal	Test Channel	2442MHz
--------------	--------	--------------	---------

 $30 \text{ MHz} \leq f < 1000 \text{ MHz}$

 $1000 \text{ MHz} \leq f < 12500 \text{ MHz}$


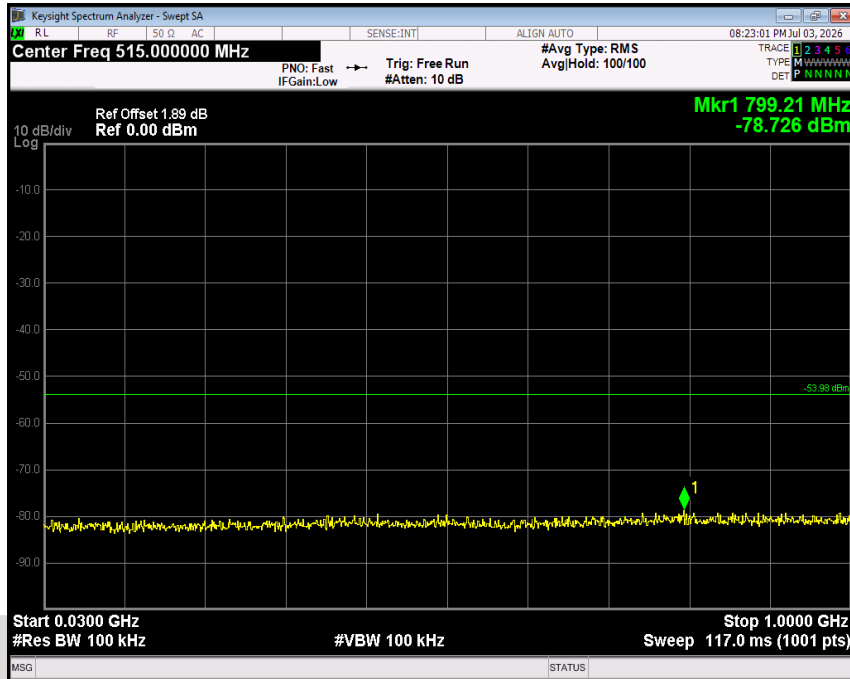
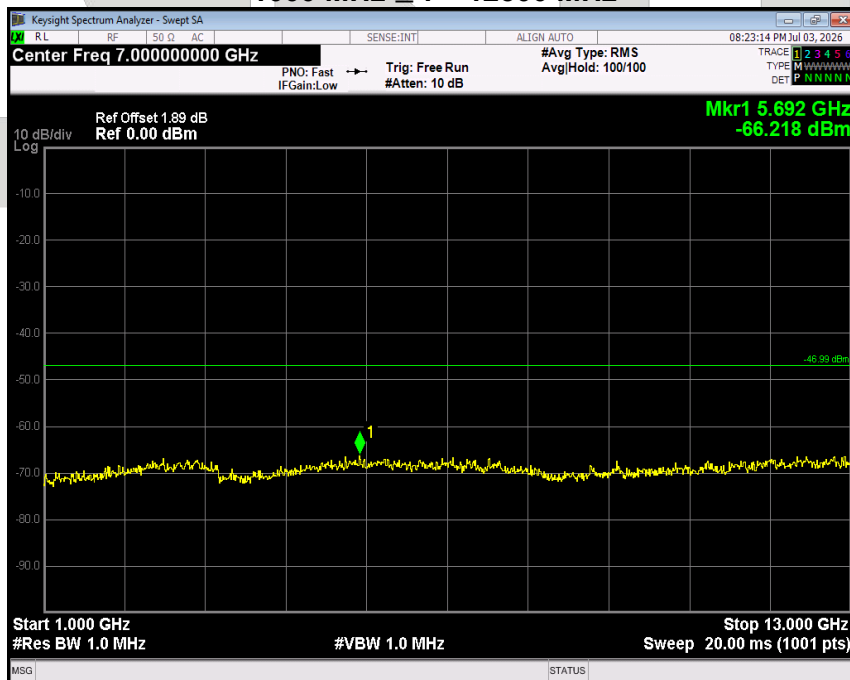
Modulation type: 802.11n20

Test voltage	Normal	Test Channel	2442MHz
--------------	--------	--------------	---------

 $30 \text{ MHz} \leq f < 1000 \text{ MHz}$

 $1000 \text{ MHz} \leq f < 12500 \text{ MHz}$


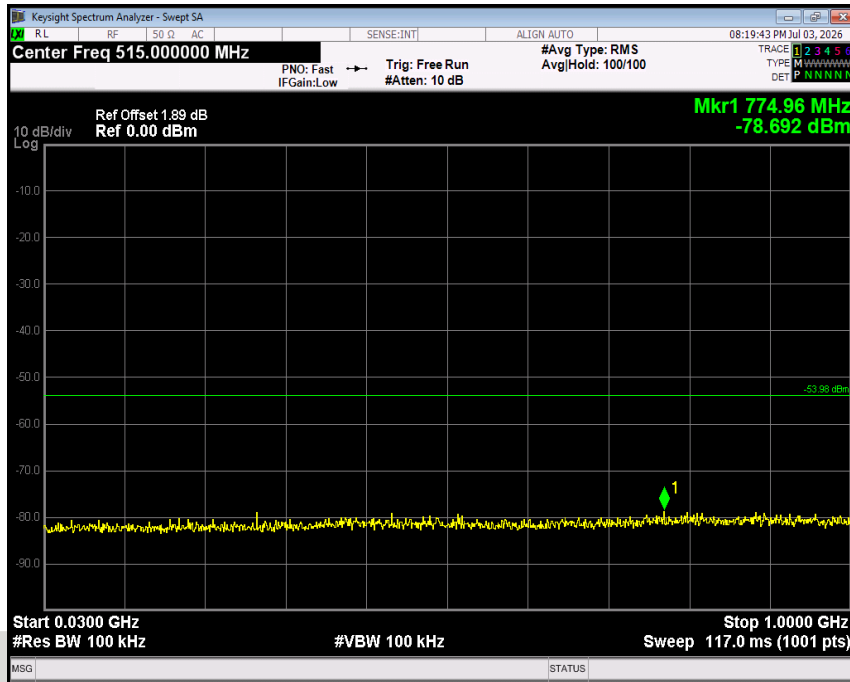
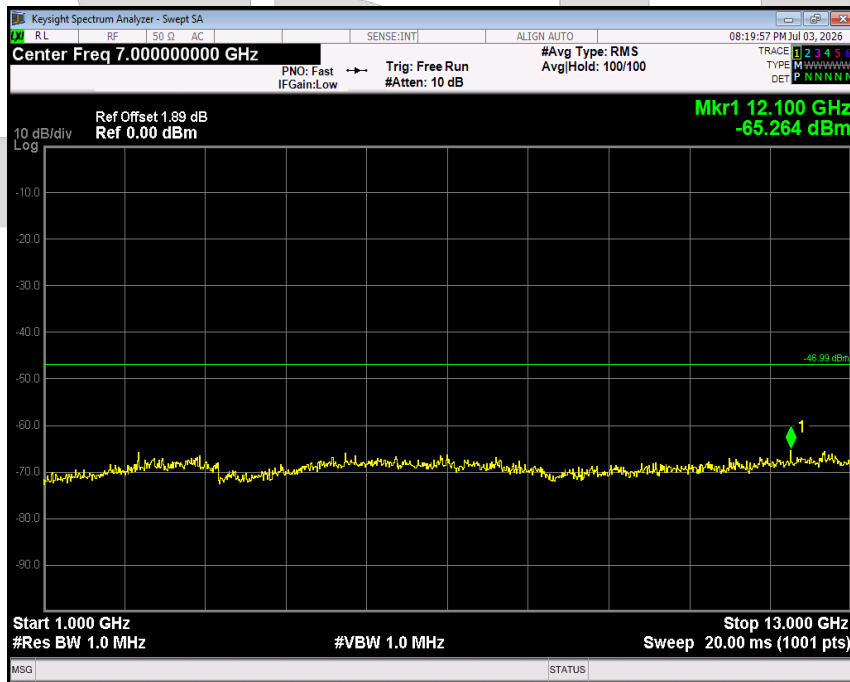
Modulation type: 802.11n40

Test voltage	Normal	Test Channel	2442MHz
--------------	--------	--------------	---------

 $30 \text{ MHz} \leq f < 1000 \text{ MHz}$

 $1000 \text{ MHz} \leq f < 12500 \text{ MHz}$


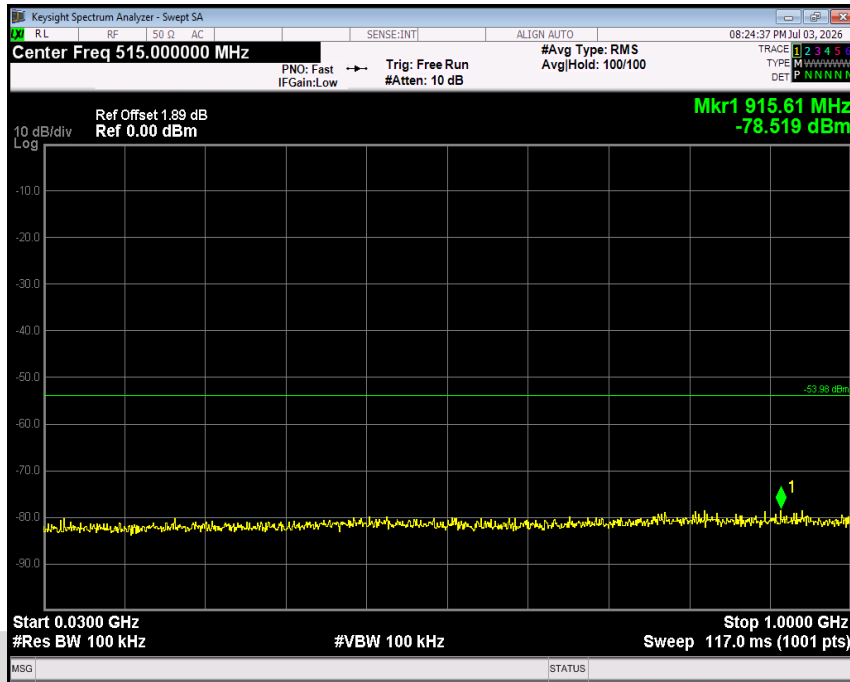
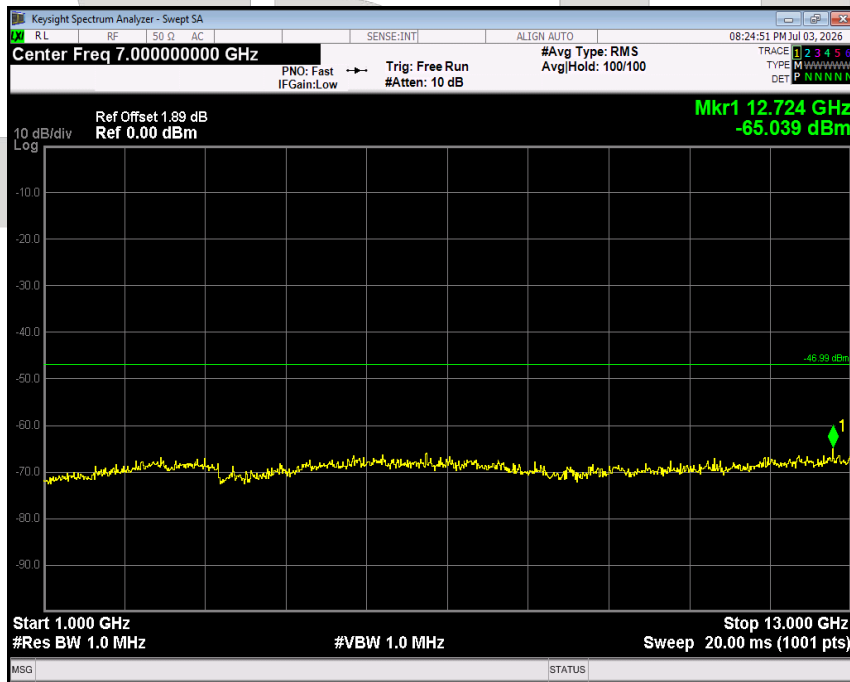
Modulation type: 802.11ax20

Test voltage	Normal	Test Channel	2442MHz
--------------	--------	--------------	---------

 $30 \text{ MHz} \leq f < 1000 \text{ MHz}$

 $1000 \text{ MHz} \leq f < 12500 \text{ MHz}$


Modulation type: 802.11ax40

Test voltage	Normal	Test Channel	2442MHz
--------------	--------	--------------	---------

 $30 \text{ MHz} \leq f < 1000 \text{ MHz}$

 $1000 \text{ MHz} \leq f < 12500 \text{ MHz}$


5.6 RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT

5.6.1 LIMIT

Item	Limits
Identification code	≥ 48 bits


5.6.2 MEASURING ID CODE SOFTWARE

Item	Limits
MAC IP List	MAC Scan

5.6.3 TEST PROCEDURES

1. In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes form EUT.
 - b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification ocde:
 - a. Transmit the predetermined identification codes form the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes form the counterpart.
 - d. Check if the EUT stops the transmission, or if it displays that idnetification codes are different from the predetermined ones.

5.6.4 TEST SETUP LAYOUT

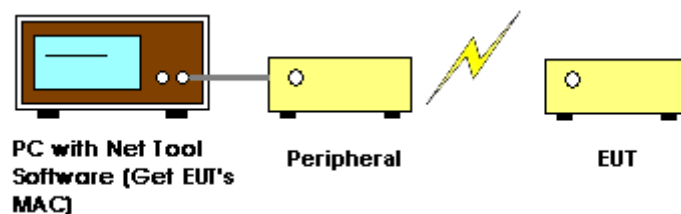

5.6.5 TEST DEVIATION

There is no deviation with the original standard.

5.6.6 EUT OPERATION DURING TEST

The EUT was programmed to be in normal transmitting mode.

5.6.7 TEST RESULT OF RADIO INTERFERENCE PREVENTION CAPABILITY

Temperature:	26°C	Relative Humidity:	50%
Pressure:	101kPa	Test Voltage:	Normal
Test Result:	PASS		

Transmitter Mode:	The transmitting mode (the identification code is more than 48 bits) of EUT is on normal operating, the interference prevention function is good.
Receiver Mode:	The transmitting mode of EUT is on normal operating, the interference prevention function is good.
MAC Address:	24-57-12-4C-7D-6C




5.7 CARRIER SENSE CAPABILITY

5.7.1 LIMIT

EUT stop RF transmission signal after carrier inject to EUT

5.7.2 TEST PROCEDURE

Measurement System Diagram

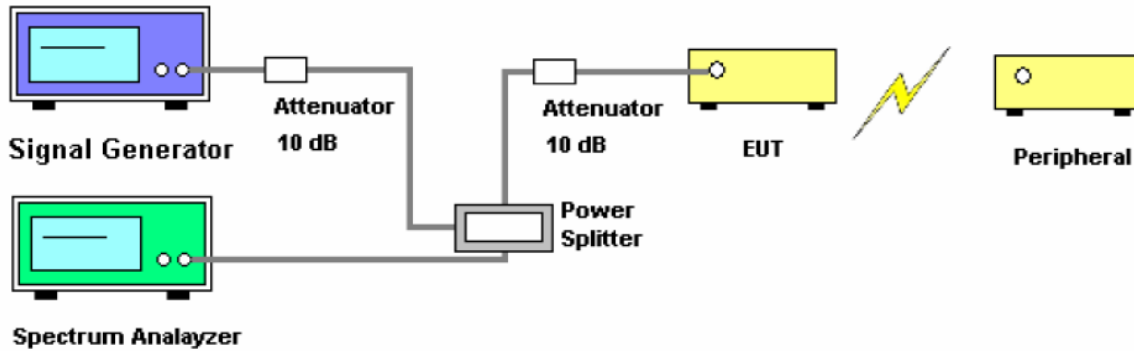

1. SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG and power level is $[on\ 22.79 + G - 20 \cdot \log(f)\ dBm]$ (G is the antenna gain, f is the test frequency).
2. turn off the RF signal of the SG.
3. EUT have transmitted the maximum modulation signal and fixed channelize.
4. Setting of SA :RBW/VBW=1MHz/1MHz,Span=50MHz,Sweep time=auto, Sweep mode=continuous, Detect mode=positive peak
5. SG RF signal on.
6. EUT shall be stop the transmitted any signal and SG RF signal off, the EUT will be continuous transmitted signal.

5.7.3 TEST RESULT

Test Mode	Test Channel (MHz)	Result		
		Normal Voltage	High Voltage	Low Voltage
802.11n40	2422	Pass	Pass	Pass
	2442	Pass	Pass	Pass
	2462	Pass	Pass	Pass
Test Mode	Test Channel (MHz)	Result		
		Normal Voltage	High Voltage	Low Voltage
802.11ax40	2422	Pass	Pass	Pass
	2442	Pass	Pass	Pass
	2462	Pass	Pass	Pass

Note: The EUT cannot transmit radio when the field strength at maximal gain direction of receiving antenna power is over 100mV/m; and the EUT can start to transmit after carrier sensing.

6. EUT TEST PHOTO

Reference to the appendix I for details.

7. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******

