


Site: AC1	Time: 2019/01/29 - 17:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2437MHz (CDD Mode)	

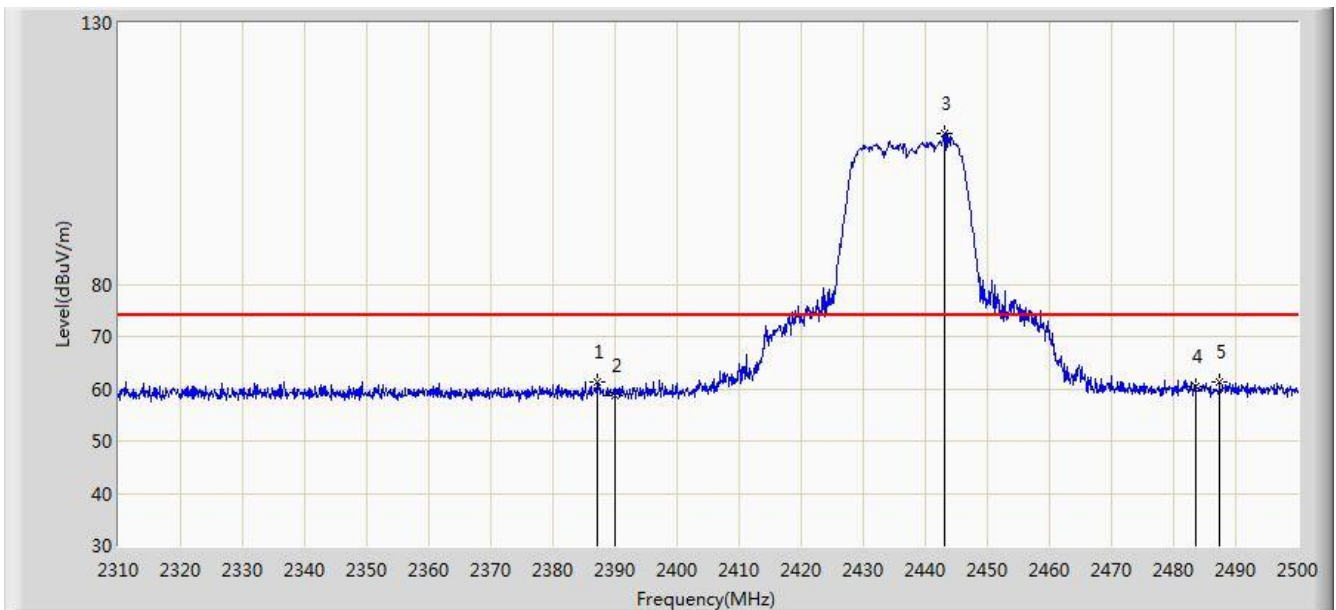


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.045	61.214	28.656	-12.786	74.000	32.558	PK
2			2390.000	58.745	26.191	-15.255	74.000	32.554	PK
3		*	2443.190	108.949	76.461	N/A	N/A	32.488	PK
4			2483.500	60.446	27.865	-13.554	74.000	32.580	PK
5			2487.365	61.382	28.790	-12.618	74.000	32.592	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2437MHz (CDD Mode)	

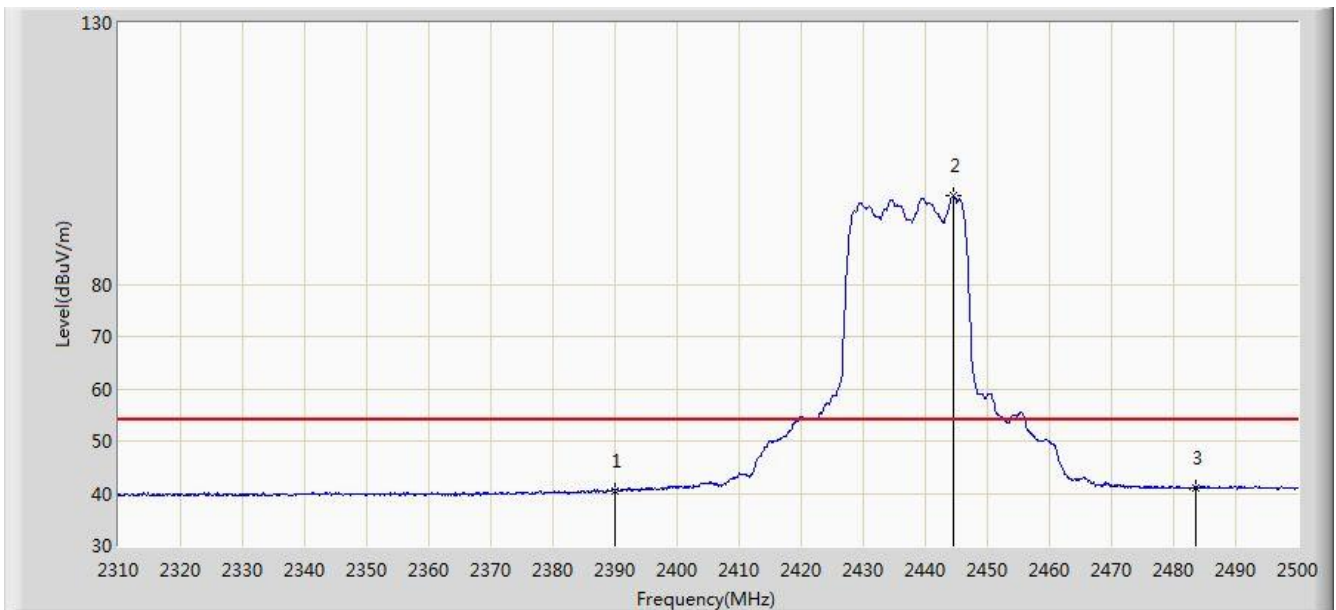


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	40.559	8.005	-13.441	54.000	32.554	AV
2		*	2444.615	96.812	64.325	N/A	N/A	32.487	AV
3			2483.500	41.030	8.449	-12.970	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2437MHz (CDD Mode)	

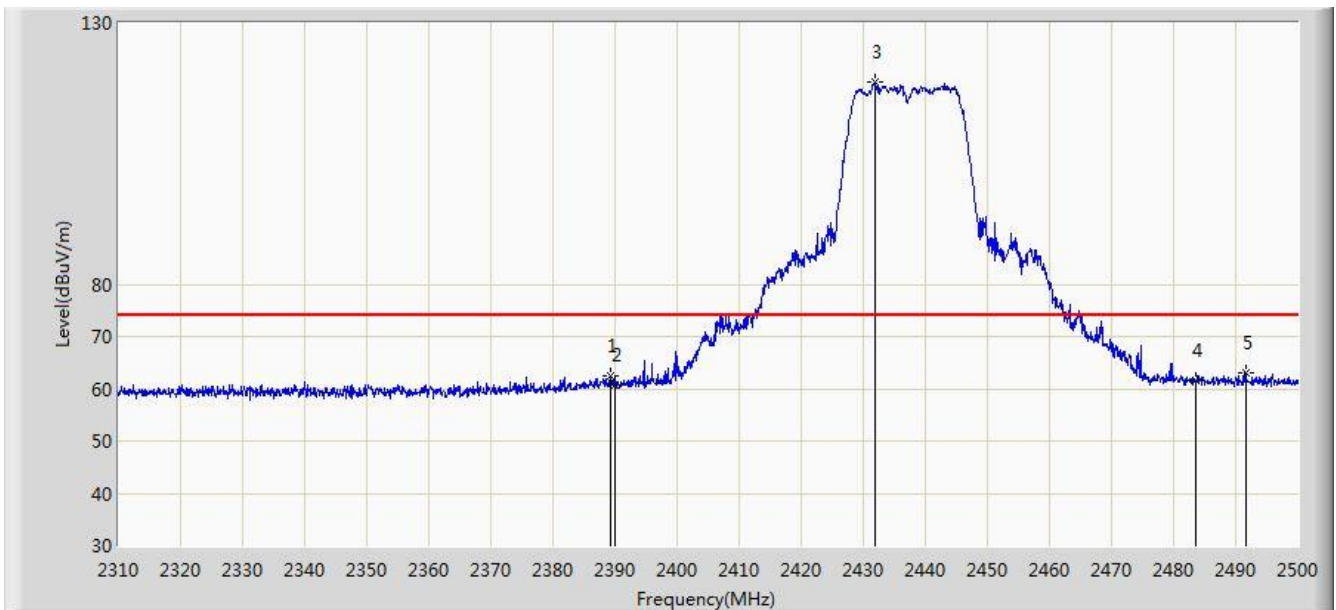


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.230	62.424	29.868	-11.576	74.000	32.555	PK
2			2390.000	60.602	28.048	-13.398	74.000	32.554	PK
3		*	2431.885	118.694	86.192	N/A	N/A	32.502	PK
4			2483.500	61.692	29.111	-12.308	74.000	32.580	PK
5			2491.640	63.044	30.439	-10.956	74.000	32.605	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2437MHz (CDD Mode)	

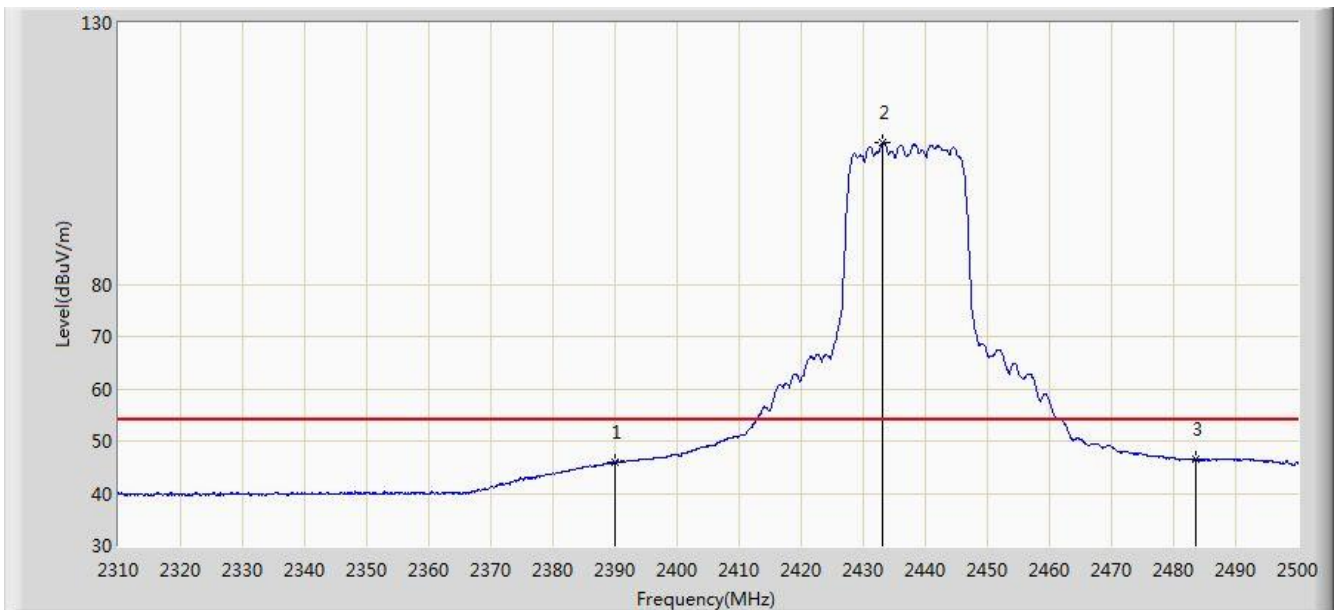


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.924	13.370	-8.076	54.000	32.554	AV
2		*	2433.120	107.180	74.680	N/A	N/A	32.501	AV
3			2483.500	46.381	13.800	-7.619	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2457MHz (CDD Mode)	

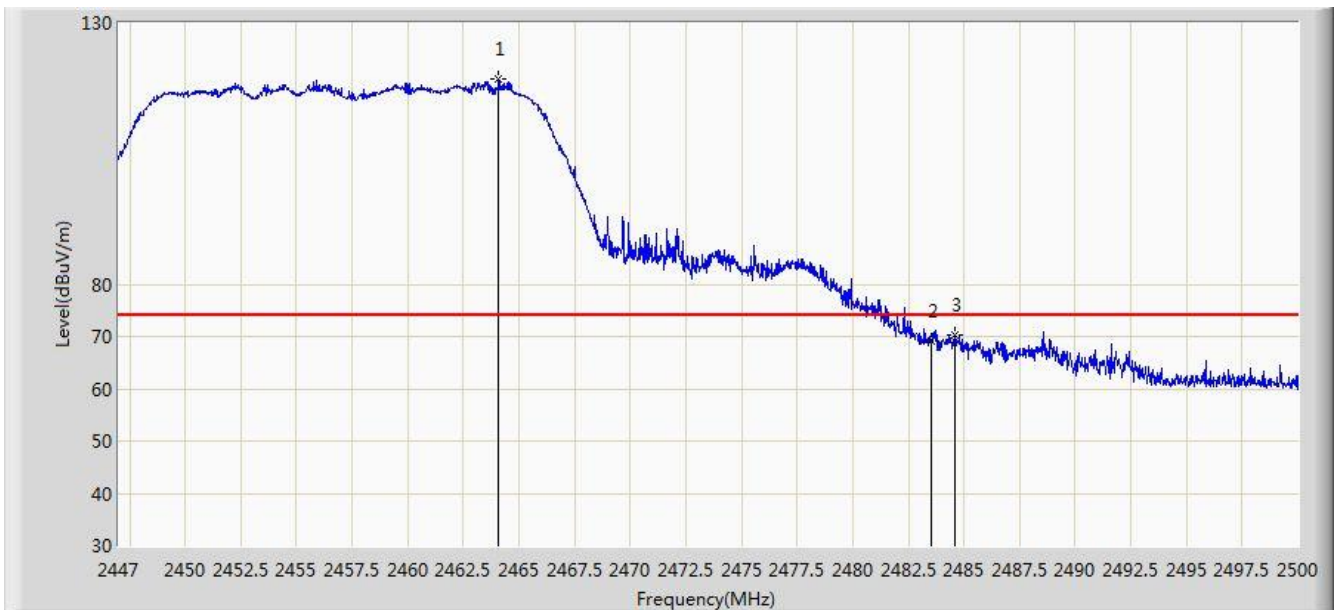


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.066	119.201	86.679	N/A	N/A	32.523	PK
2			2483.500	69.090	36.509	-4.910	74.000	32.580	PK
3			2484.604	70.308	37.724	-3.692	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2457MHz (CDD Mode)	

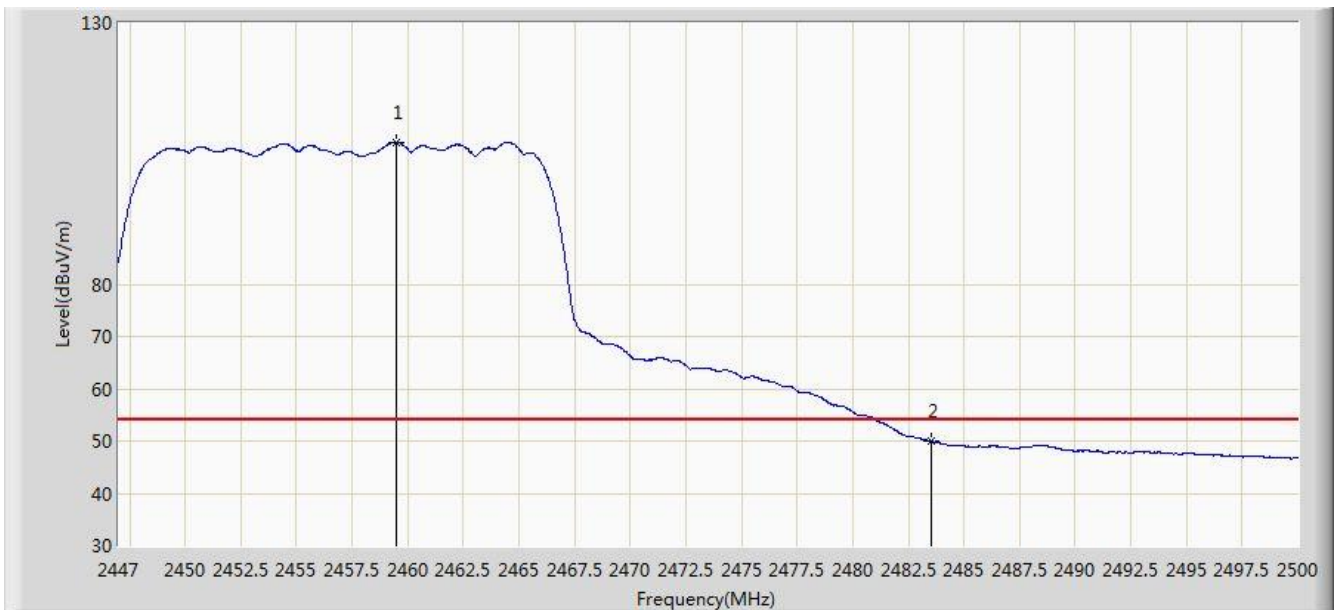


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.481	107.174	74.662	N/A	N/A	32.512	AV
2			2483.500	49.922	17.341	-4.078	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2462MHz (CDD Mode)	

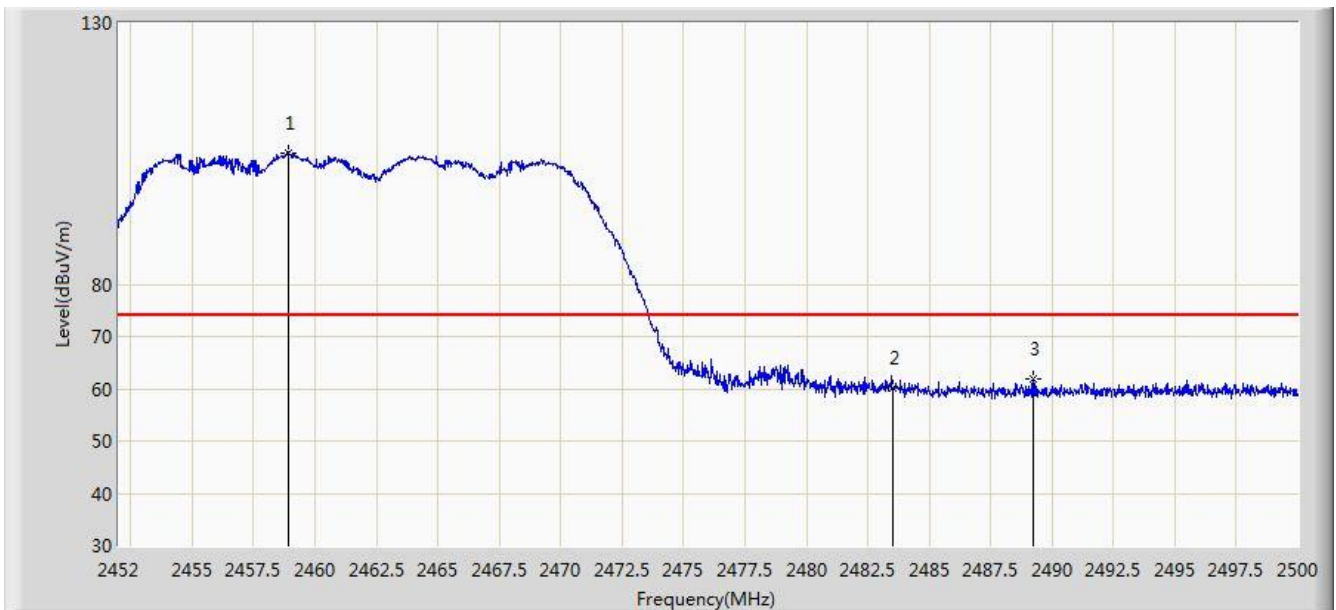


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.912	105.130	72.619	N/A	N/A	32.511	PK
2			2483.500	60.228	27.647	-13.772	74.000	32.580	PK
3			2489.224	61.920	29.322	-12.080	74.000	32.598	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2462MHz (CDD Mode)	

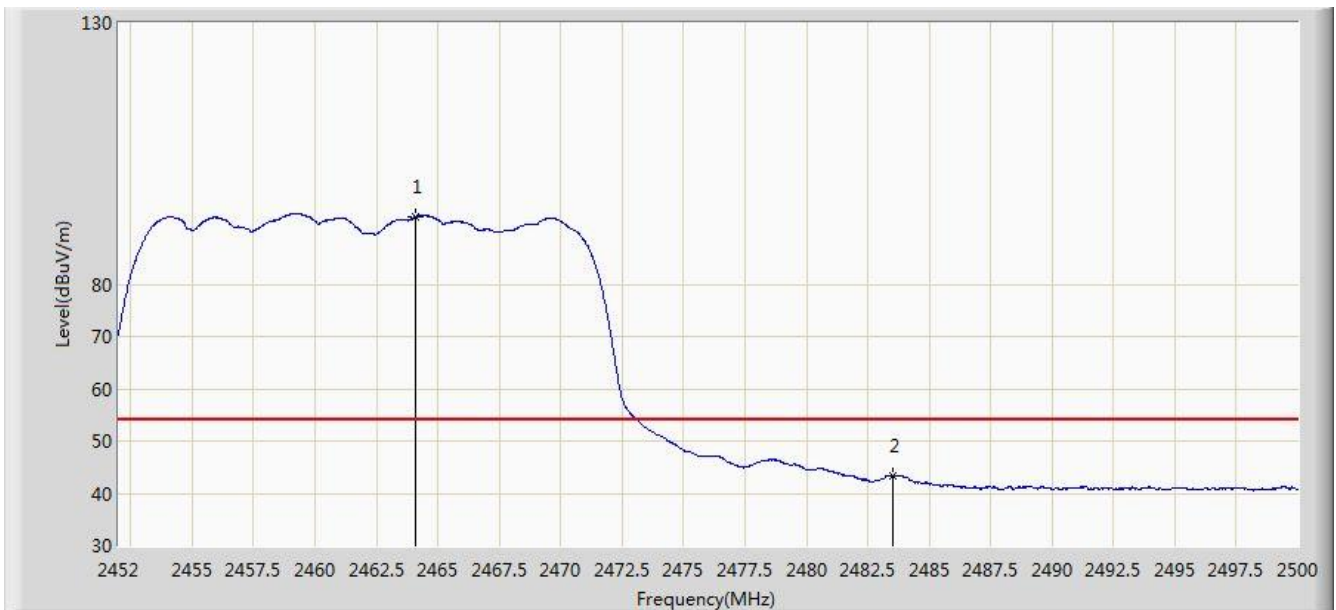


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.120	92.907	60.384	N/A	N/A	32.523	AV
2			2483.500	43.400	10.819	-10.600	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2462MHz (CDD Mode)	

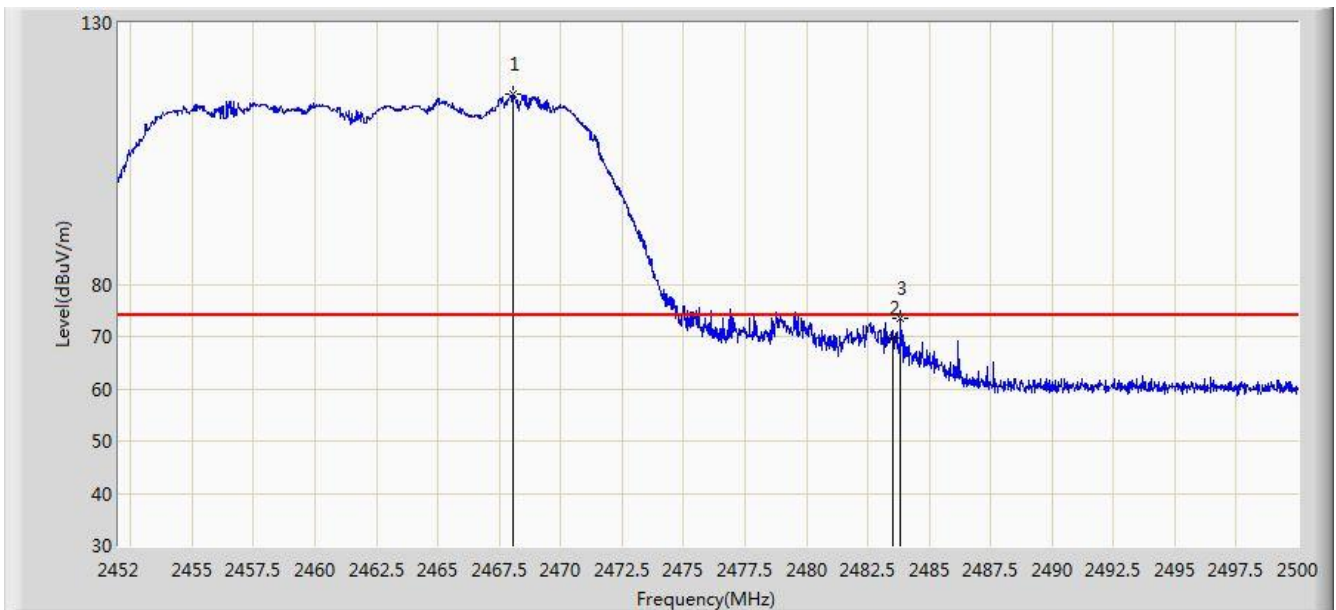


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.080	116.310	83.776	N/A	N/A	32.535	PK
2			2483.500	69.762	37.181	-4.238	74.000	32.580	PK
3			2483.848	73.447	40.865	-0.553	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 17:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2462MHz (CDD Mode)	

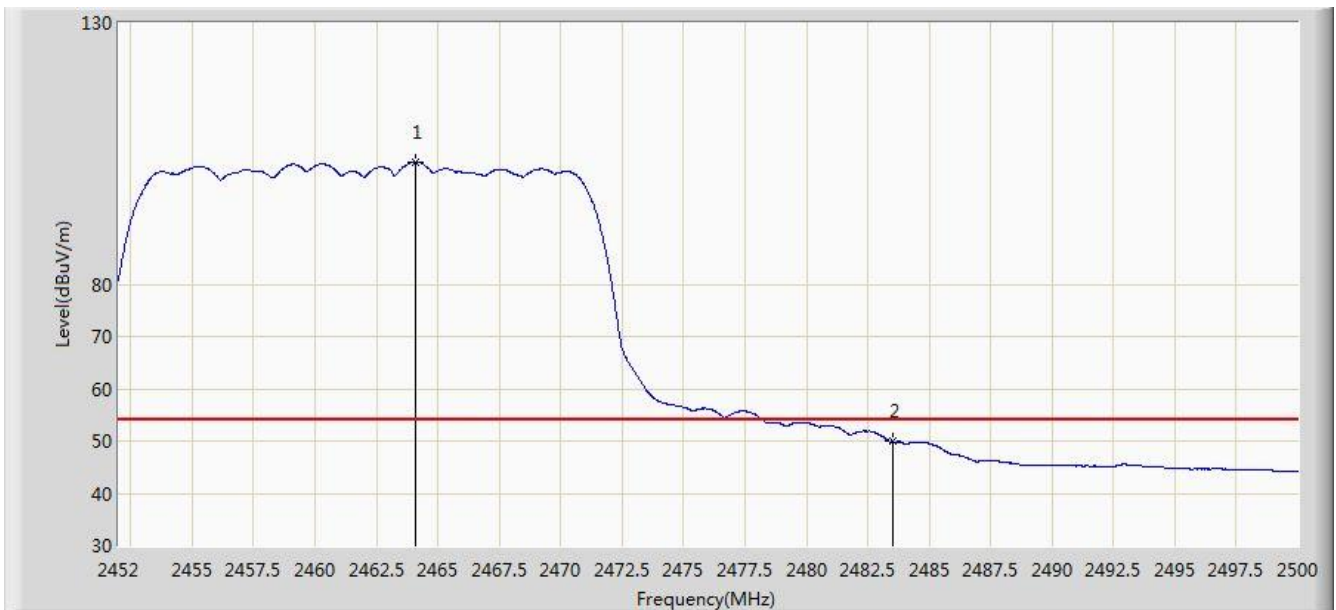


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.072	103.411	70.889	N/A	N/A	32.523	AV
2			2483.500	49.879	17.298	-4.121	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 22:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2422MHz (CDD Mode)	

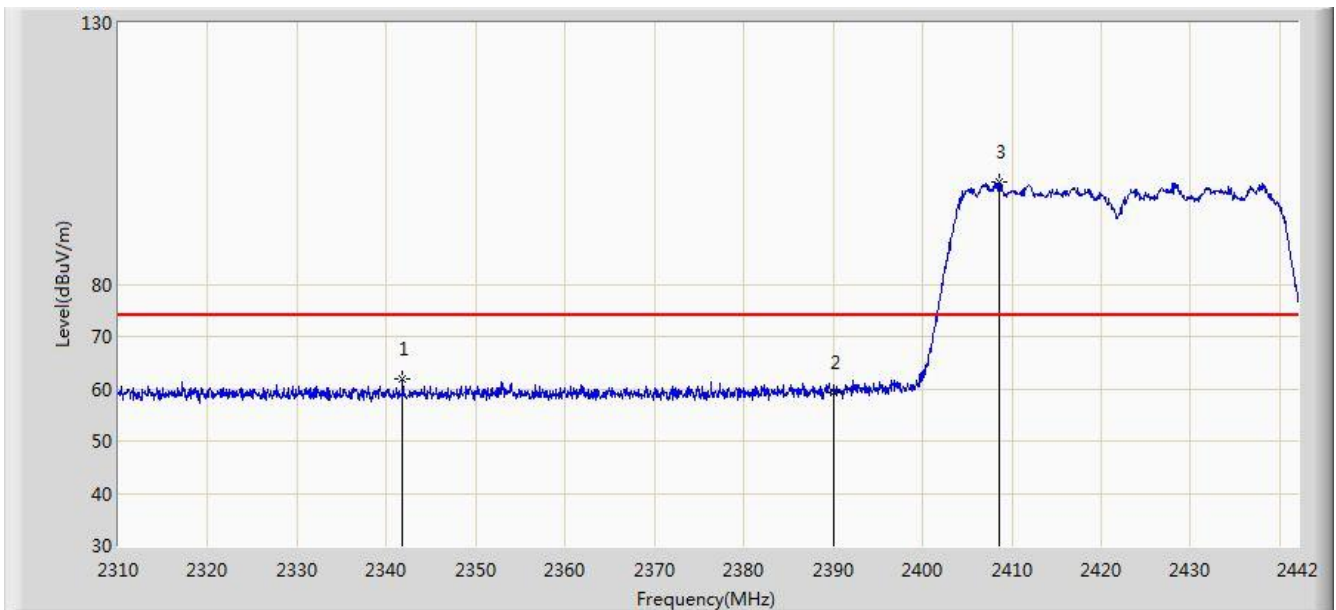


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2341.812	61.820	29.175	-12.180	74.000	32.644	PK
2			2390.000	59.236	26.682	-14.764	74.000	32.554	PK
3		*	2408.538	99.518	66.988	N/A	N/A	32.530	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 22:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2422MHz (CDD Mode)	

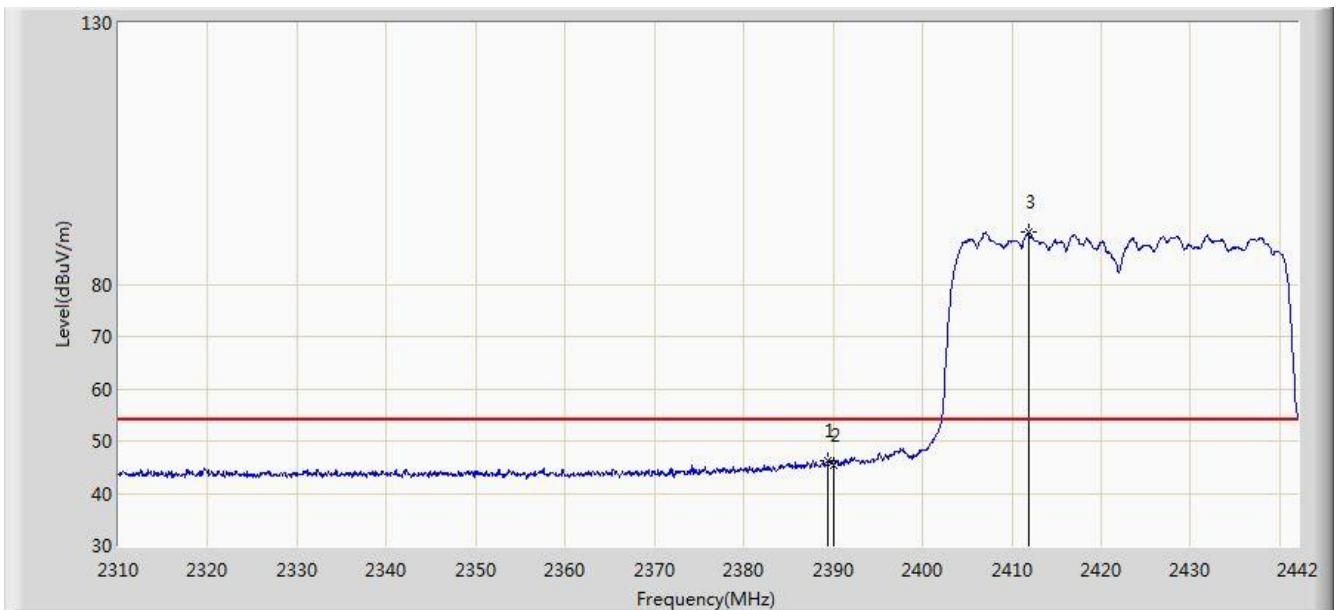


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.464	46.211	13.656	-7.789	54.000	32.555	AV
2			2390.000	45.478	12.924	-8.522	54.000	32.554	AV
3		*	2411.970	90.116	57.590	N/A	N/A	32.526	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 22:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2422MHz (CDD Mode)	

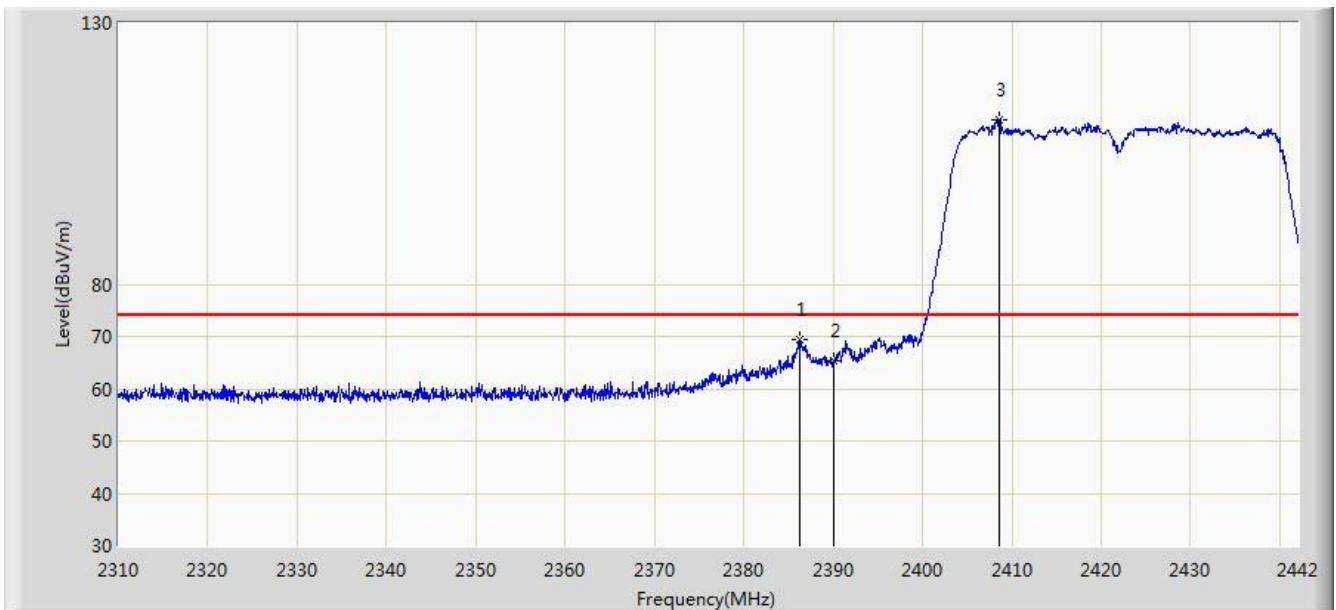


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.230	69.451	36.891	-4.549	74.000	32.559	PK
2			2390.000	65.439	32.885	-8.561	74.000	32.554	PK
3		*	2408.538	111.561	79.031	N/A	N/A	32.530	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 22:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2422MHz (CDD Mode)	

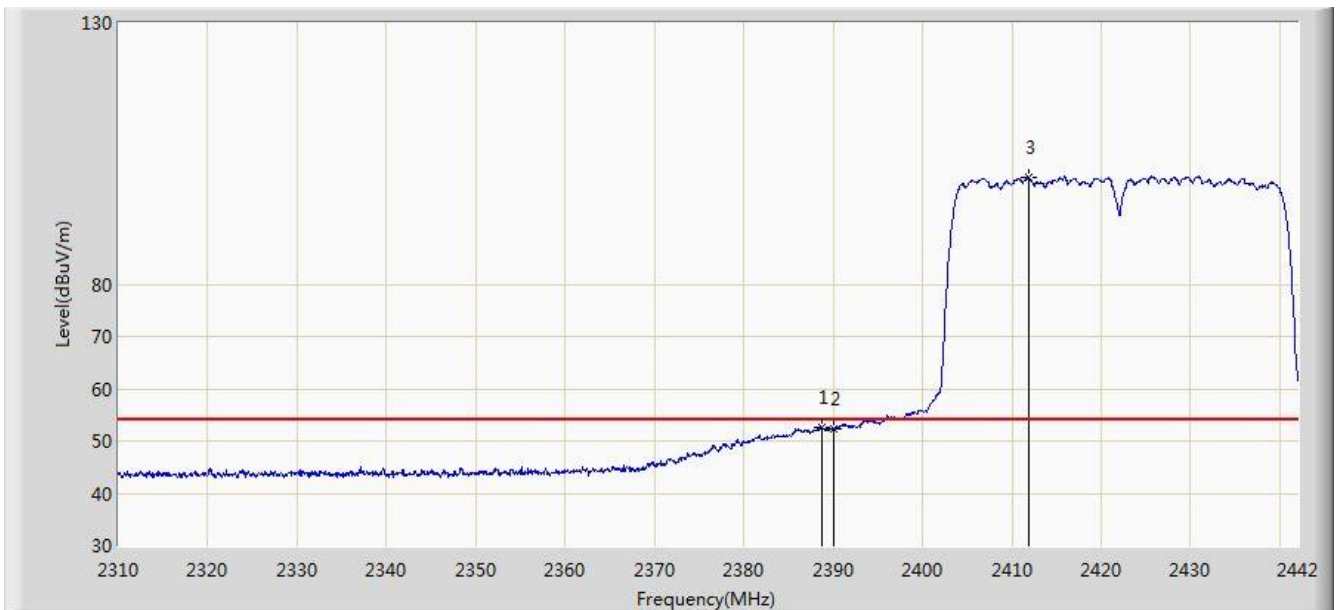


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.804	52.720	20.164	-1.280	54.000	32.556	AV
2			2390.000	52.250	19.696	-1.750	54.000	32.554	AV
3		*	2411.838	100.387	67.861	N/A	N/A	32.526	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 22:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2427MHz (CDD Mode)	

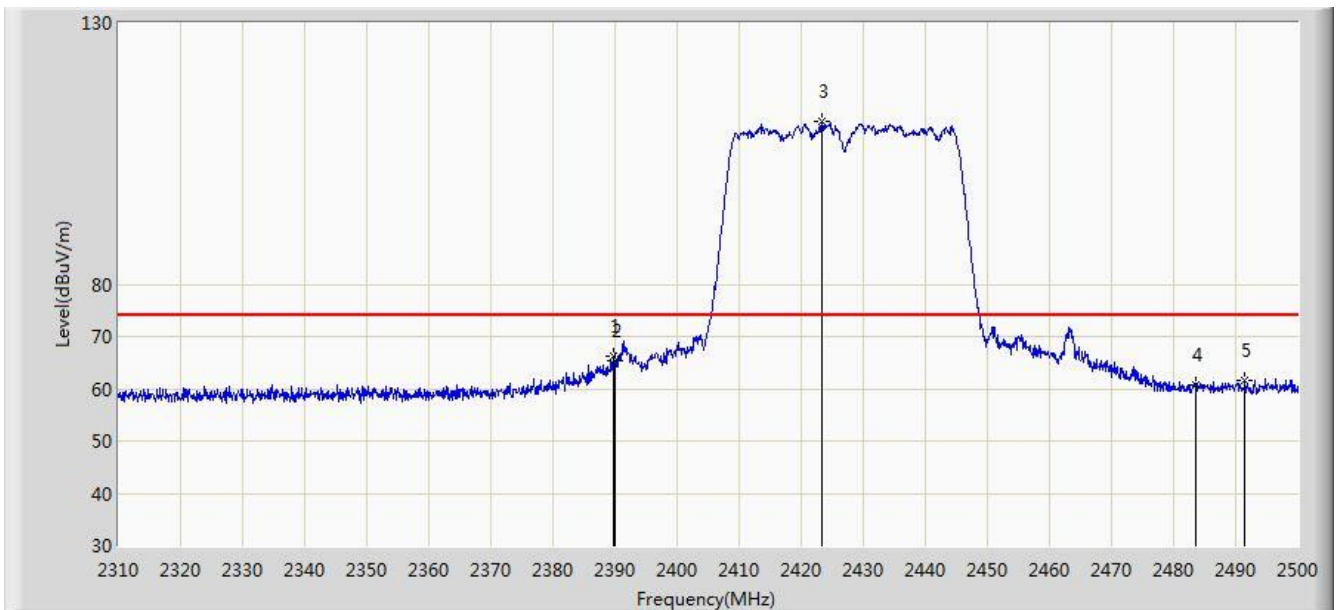


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	66.198	33.643	-7.802	74.000	32.555	PK
2			2390.000	65.413	32.859	-8.587	74.000	32.554	PK
3		*	2423.335	111.135	78.623	N/A	N/A	32.512	PK
4			2483.500	60.813	28.232	-13.187	74.000	32.580	PK
5			2491.450	61.594	28.990	-12.406	74.000	32.605	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 22:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2427MHz (CDD Mode)	

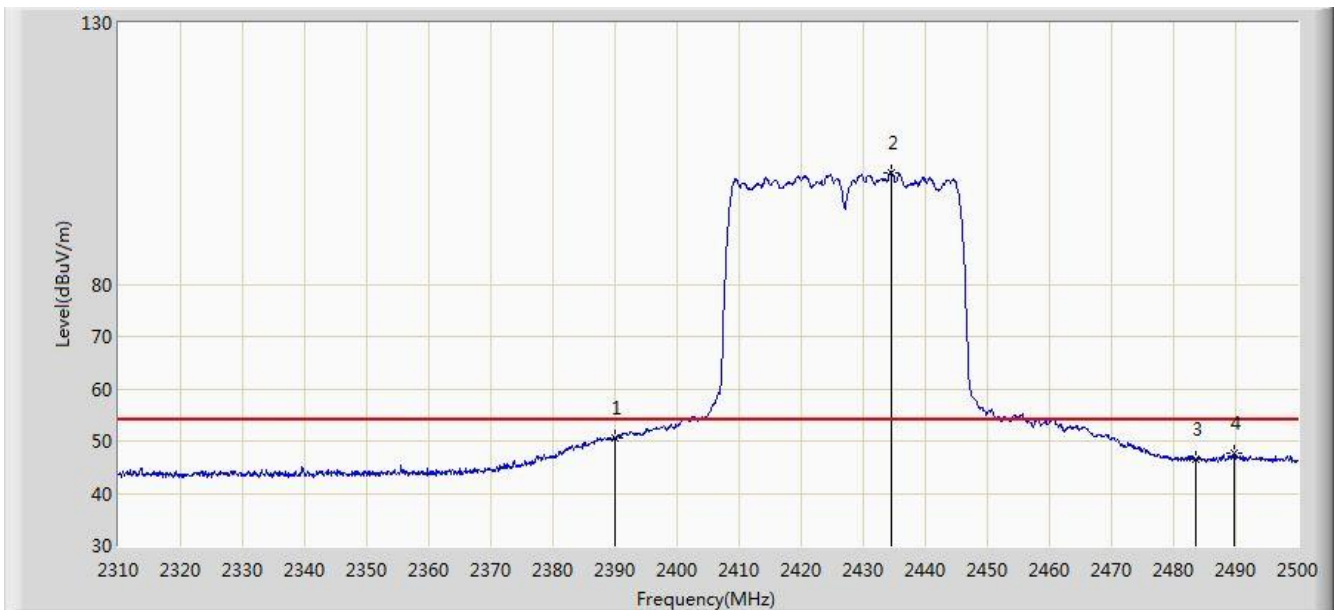


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.625	18.071	-3.375	54.000	32.554	AV
2		*	2434.640	101.371	68.872	N/A	N/A	32.499	AV
3			2483.500	46.440	13.859	-7.560	54.000	32.580	AV
4			2489.740	47.549	14.950	-6.451	54.000	32.600	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 22:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2432MHz (CDD Mode)	

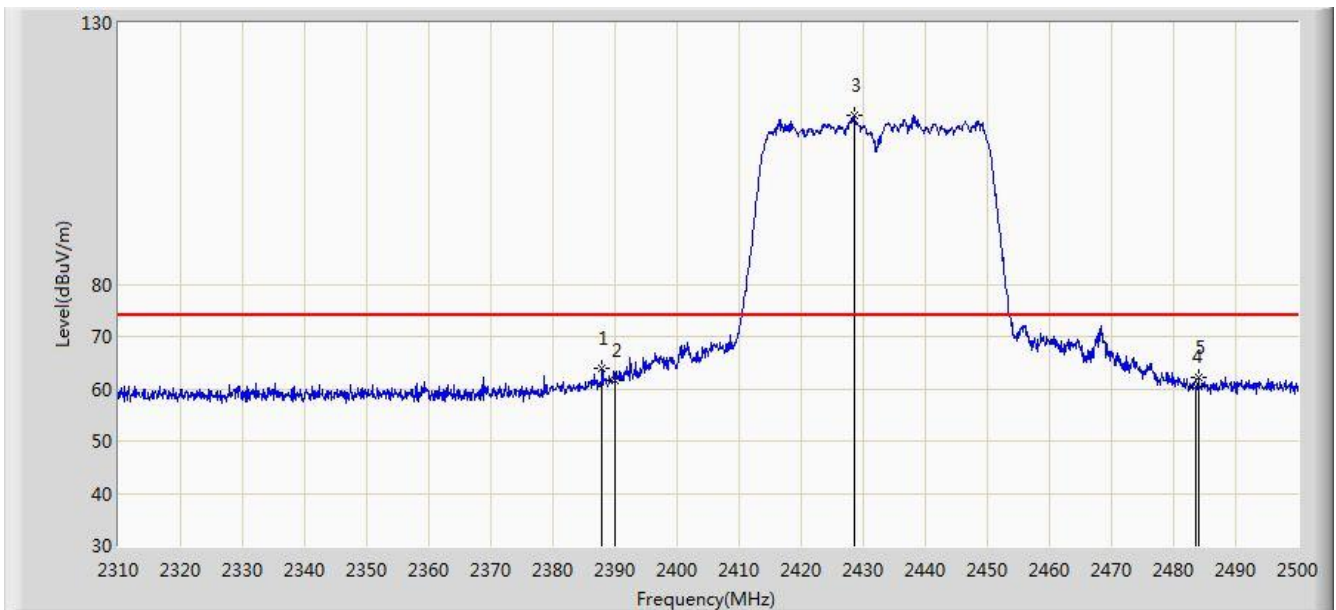


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.900	63.817	31.260	-10.183	74.000	32.558	PK
2			2390.000	61.561	29.007	-12.439	74.000	32.554	PK
3		*	2428.560	112.371	79.865	N/A	N/A	32.506	PK
4			2483.500	60.375	27.794	-13.625	74.000	32.580	PK
5			2483.945	62.114	29.532	-11.886	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 22:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2432MHz (CDD Mode)	

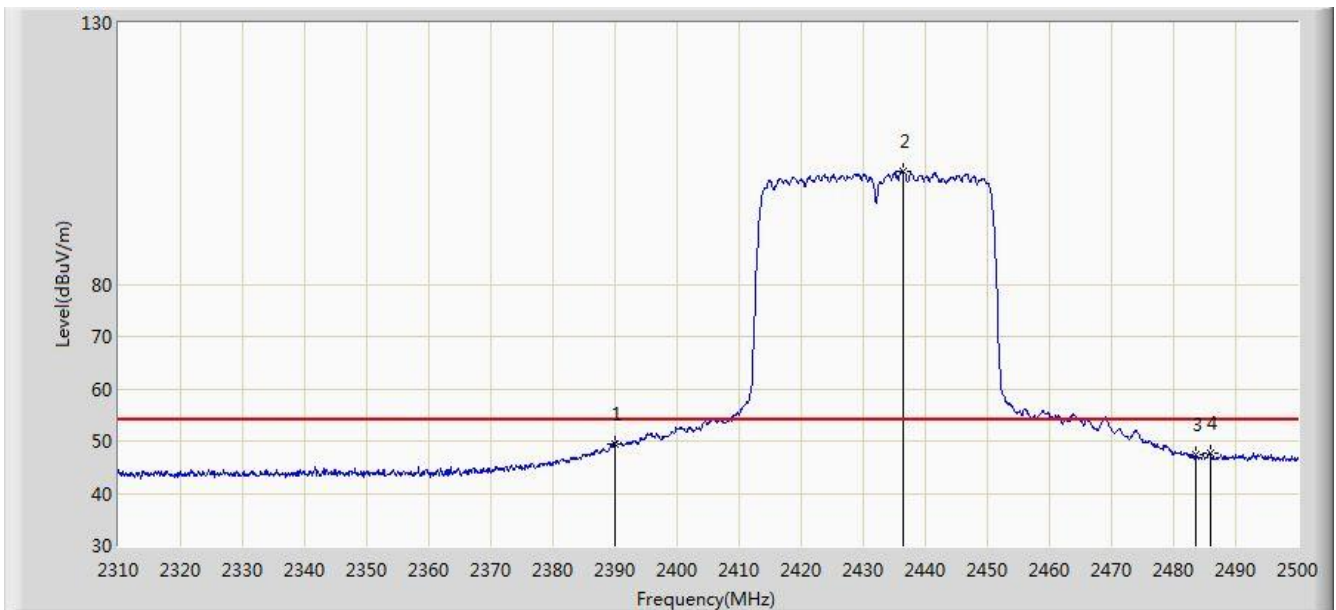


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.460	16.906	-4.540	54.000	32.554	AV
2		*	2436.445	101.595	69.098	N/A	N/A	32.497	AV
3			2483.500	47.403	14.822	-6.597	54.000	32.580	AV
4			2485.845	47.644	15.056	-6.356	54.000	32.587	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2437MHz (CDD Mode)	

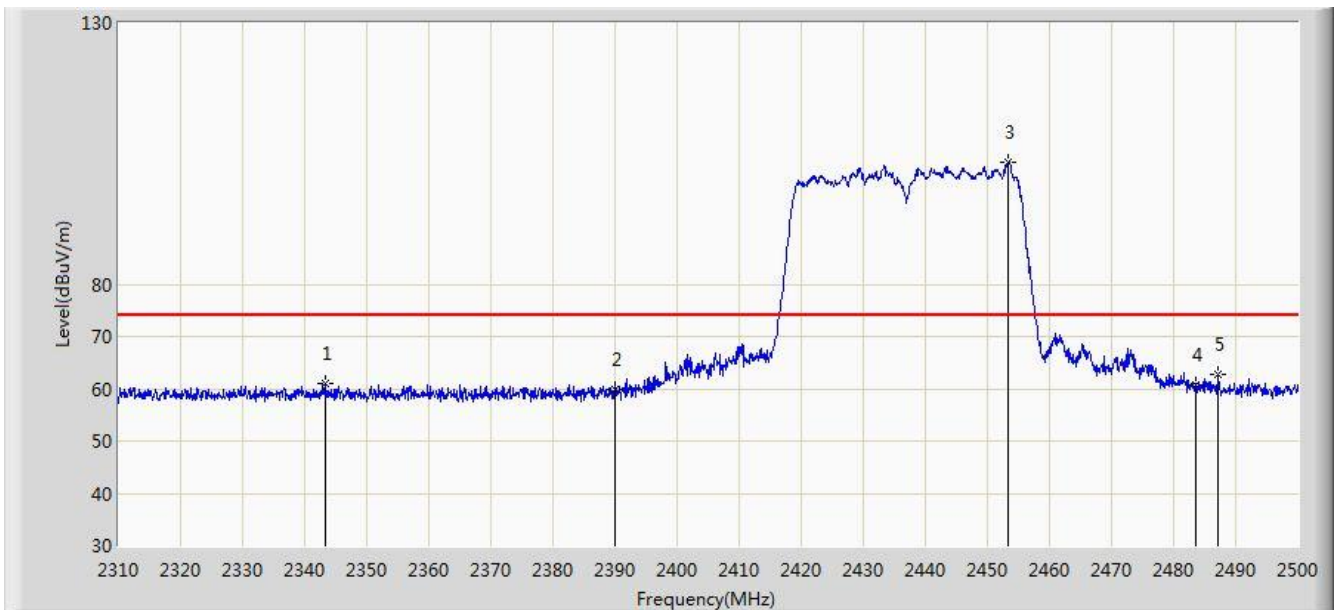


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2343.440	61.089	28.450	-12.911	74.000	32.638	PK
2			2390.000	59.955	27.401	-14.045	74.000	32.554	PK
3		*	2453.355	103.281	70.780	N/A	N/A	32.501	PK
4			2483.500	60.700	28.119	-13.300	74.000	32.580	PK
5			2487.080	62.696	30.105	-11.304	74.000	32.592	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2437MHz (CDD Mode)	

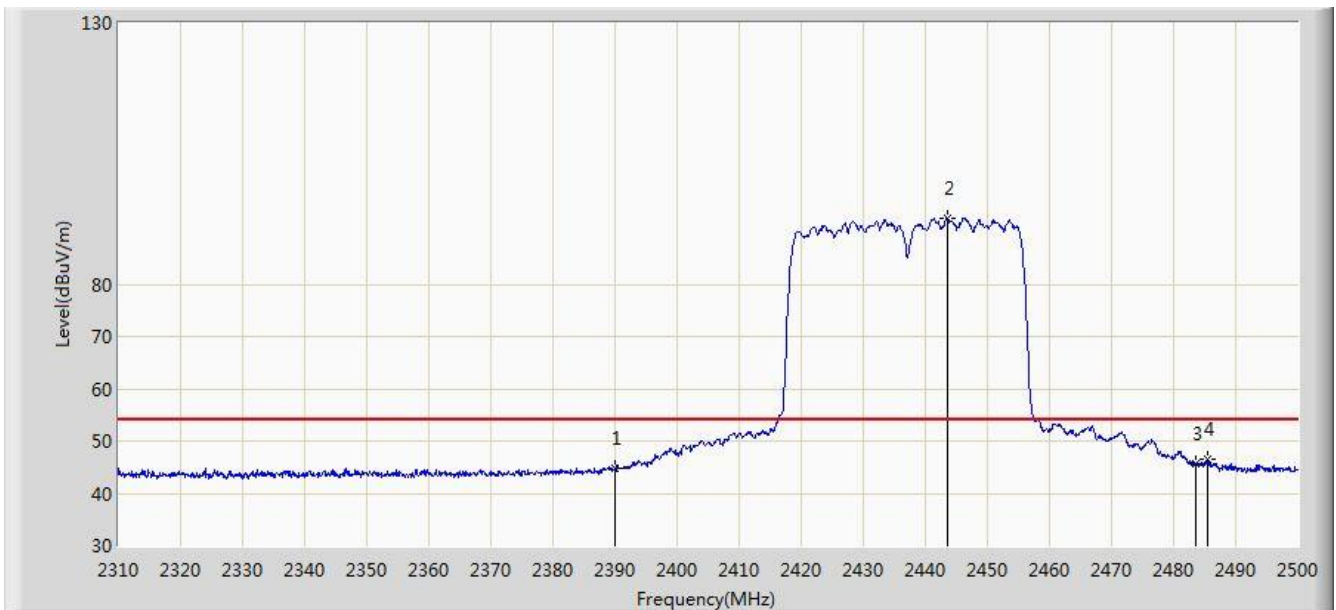


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.767	12.213	-9.233	54.000	32.554	AV
2		*	2443.570	92.597	60.109	N/A	N/A	32.488	AV
3			2483.500	45.514	12.933	-8.486	54.000	32.580	AV
4			2485.560	46.469	13.882	-7.531	54.000	32.587	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2437MHz (CDD Mode)	

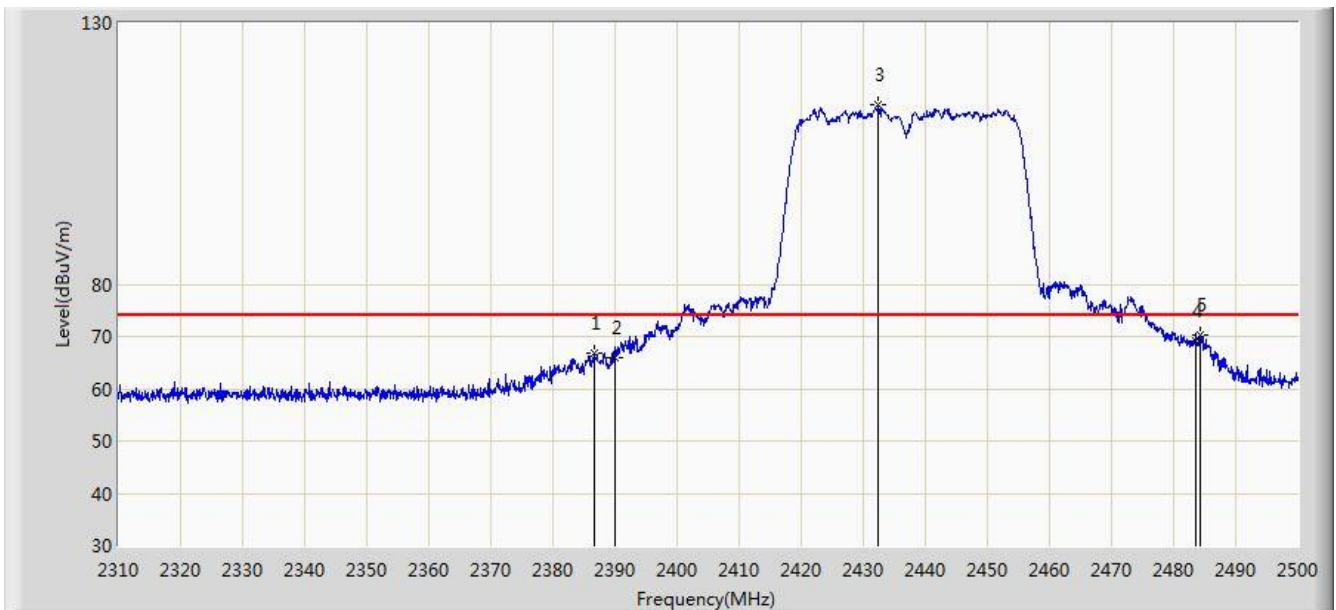


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.665	66.954	34.395	-7.046	74.000	32.559	PK
2			2390.000	65.961	33.407	-8.039	74.000	32.554	PK
3		*	2432.455	114.291	81.790	N/A	N/A	32.501	PK
4			2483.500	69.114	36.533	-4.886	74.000	32.580	PK
5			2484.325	70.293	37.710	-3.707	74.000	32.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2437MHz (CDD Mode)	

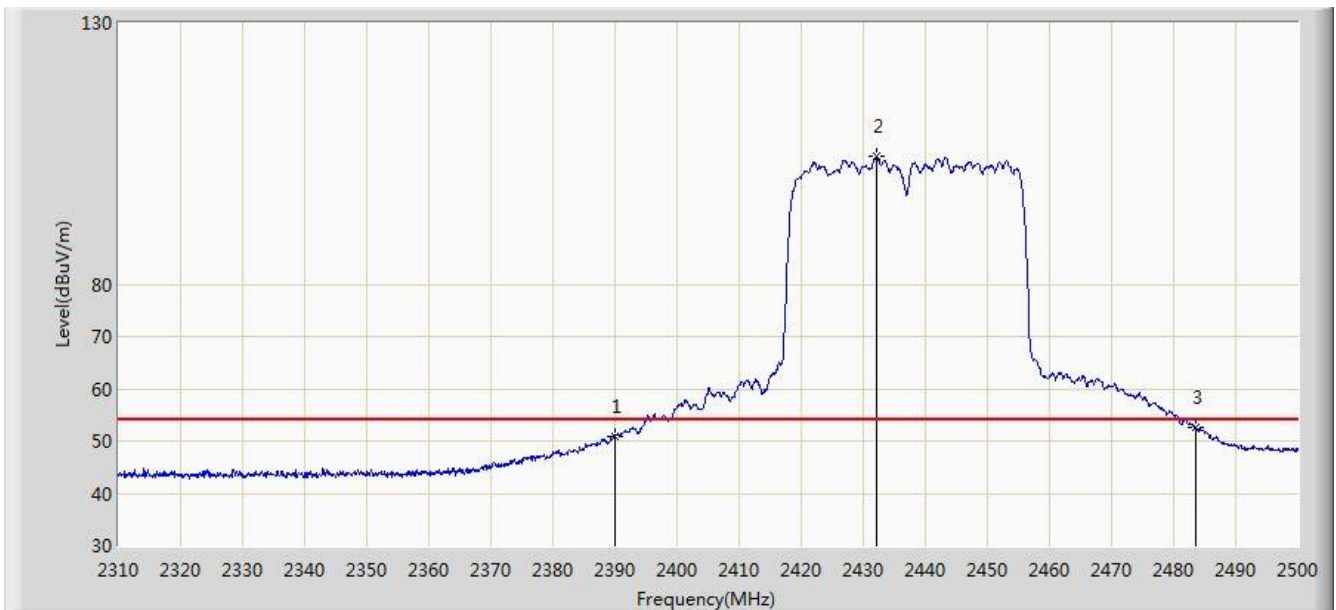


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.924	18.370	-3.076	54.000	32.554	AV
2		*	2432.075	104.420	71.918	N/A	N/A	32.502	AV
3			2483.500	52.509	19.928	-1.491	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2442MHz (CDD Mode)	

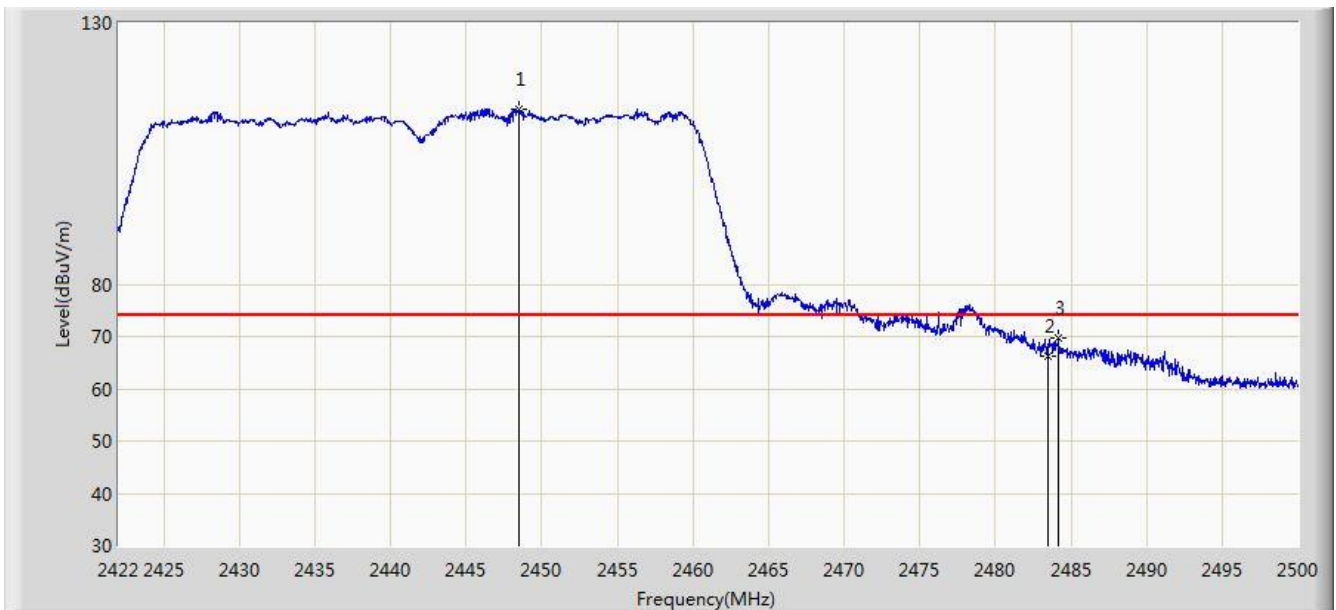


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2448.481	113.495	81.002	N/A	N/A	32.493	PK
2			2483.500	66.363	33.782	-7.637	74.000	32.580	PK
3			2484.205	69.672	37.089	-4.328	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2442MHz (CDD Mode)	

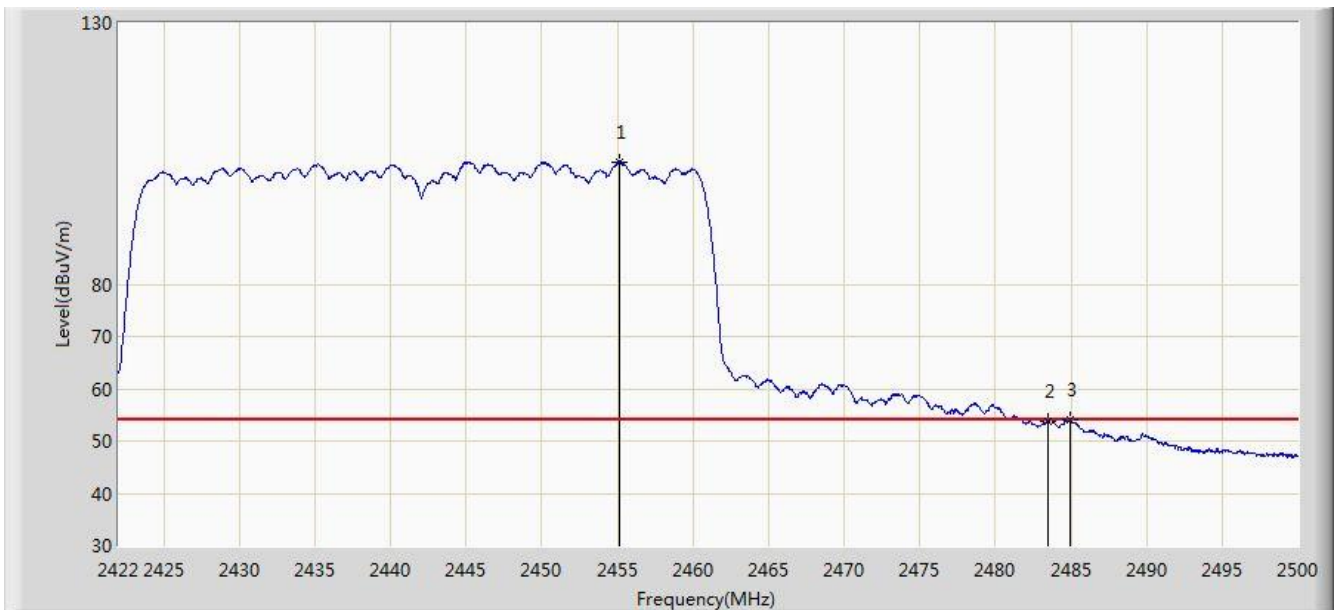


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.111	103.475	70.971	N/A	N/A	32.504	AV
2			2483.500	53.663	21.082	-0.337	54.000	32.580	AV
3			2484.985	53.965	21.380	-0.035	54.000	32.585	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2447MHz (CDD Mode)	

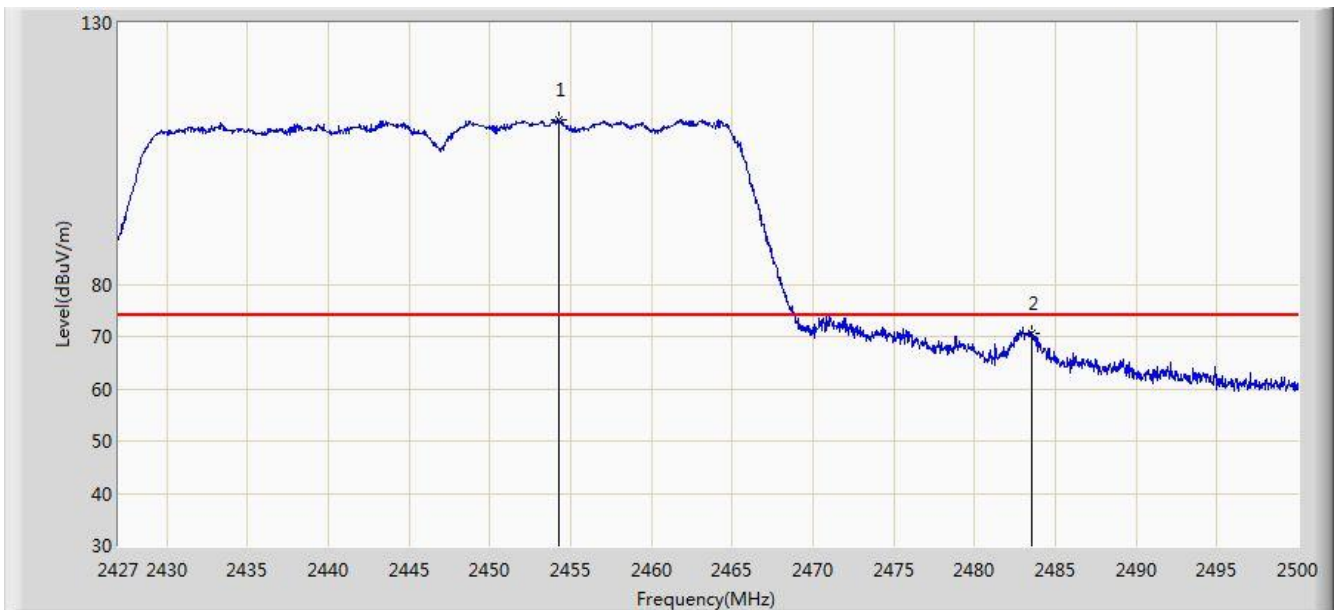


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.229	111.475	78.972	N/A	N/A	32.502	PK
2			2483.500	70.706	38.125	-3.294	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2447MHz (CDD Mode)	

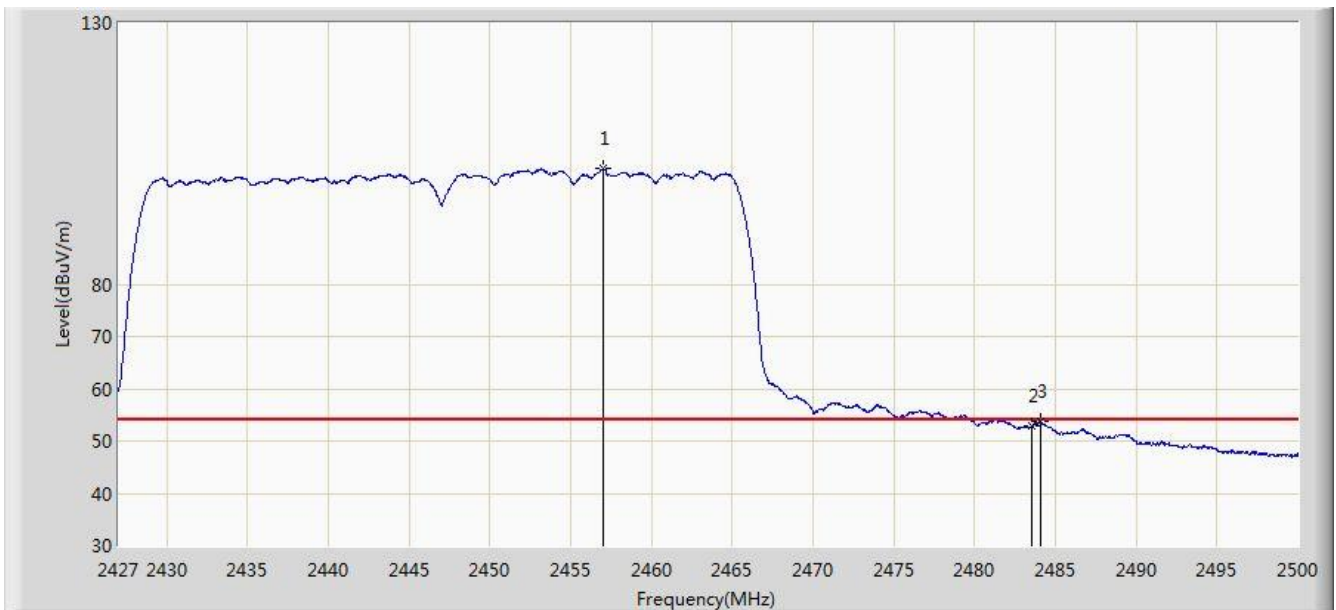


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.040	102.051	69.543	N/A	N/A	32.508	AV
2			2483.500	52.816	20.235	-1.184	54.000	32.580	AV
3			2484.050	53.735	21.153	-0.265	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2452MHz (CDD Mode)	

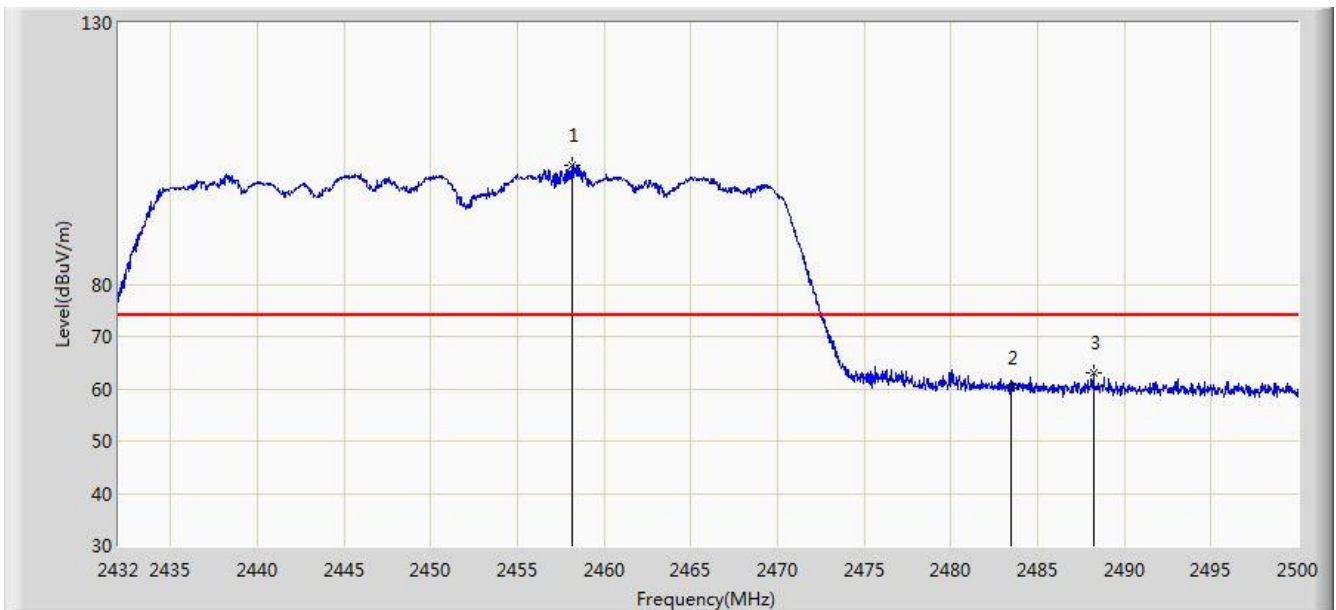


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.180	102.643	70.133	N/A	N/A	32.510	PK
2			2483.500	60.175	27.594	-13.825	74.000	32.580	PK
3			2488.202	62.921	30.326	-11.079	74.000	32.595	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2452MHz (CDD Mode)	

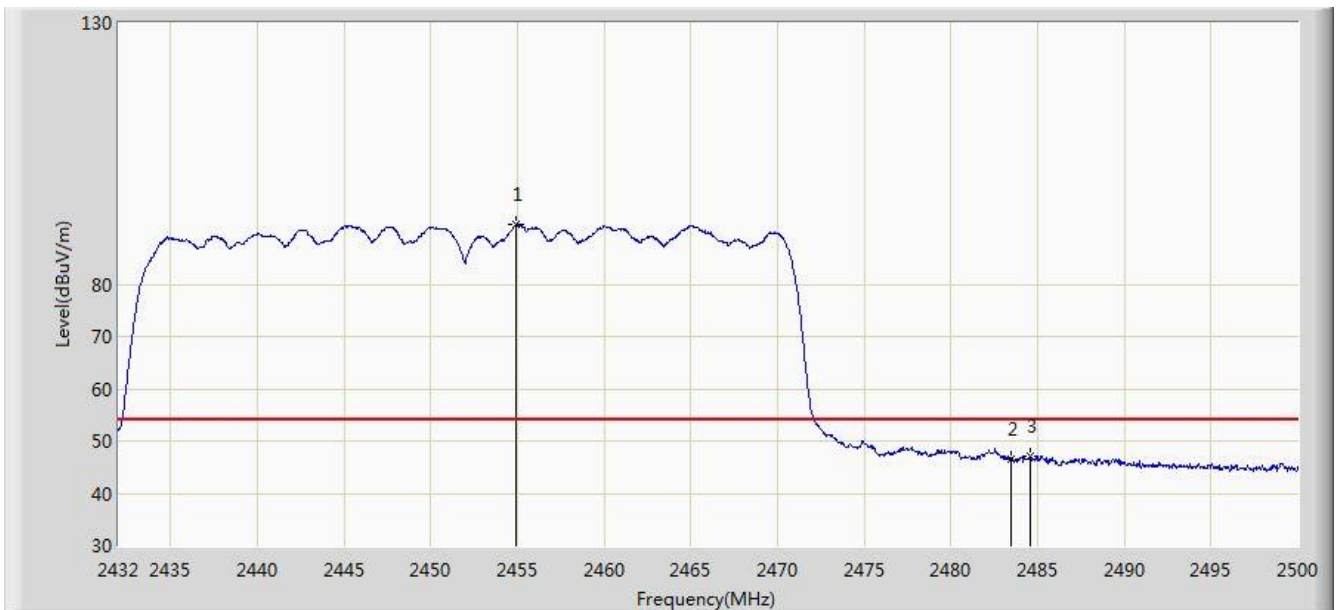


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.882	91.390	58.886	N/A	N/A	32.504	AV
2			2483.500	46.643	14.062	-7.357	54.000	32.580	AV
3			2484.598	46.973	14.389	-7.027	54.000	32.584	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2452MHz (CDD Mode)	

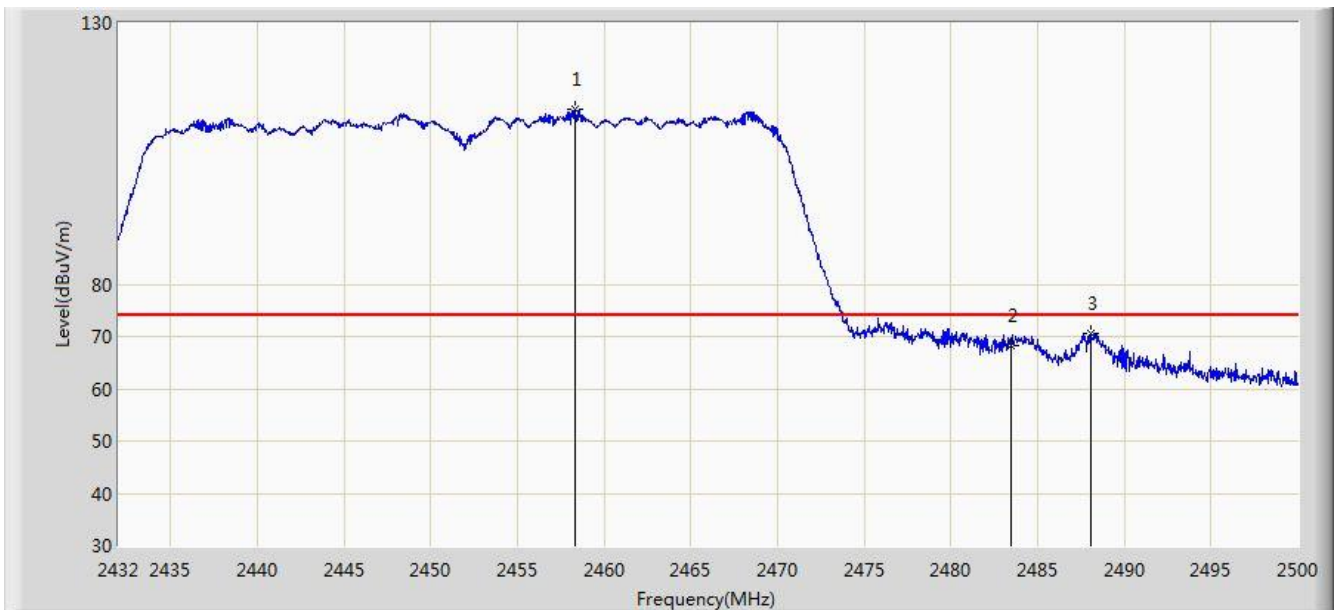


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.316	113.466	80.956	N/A	N/A	32.510	PK
2			2483.500	68.309	35.728	-5.691	74.000	32.580	PK
3			2488.066	70.694	38.100	-3.306	74.000	32.595	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2452MHz (CDD Mode)	

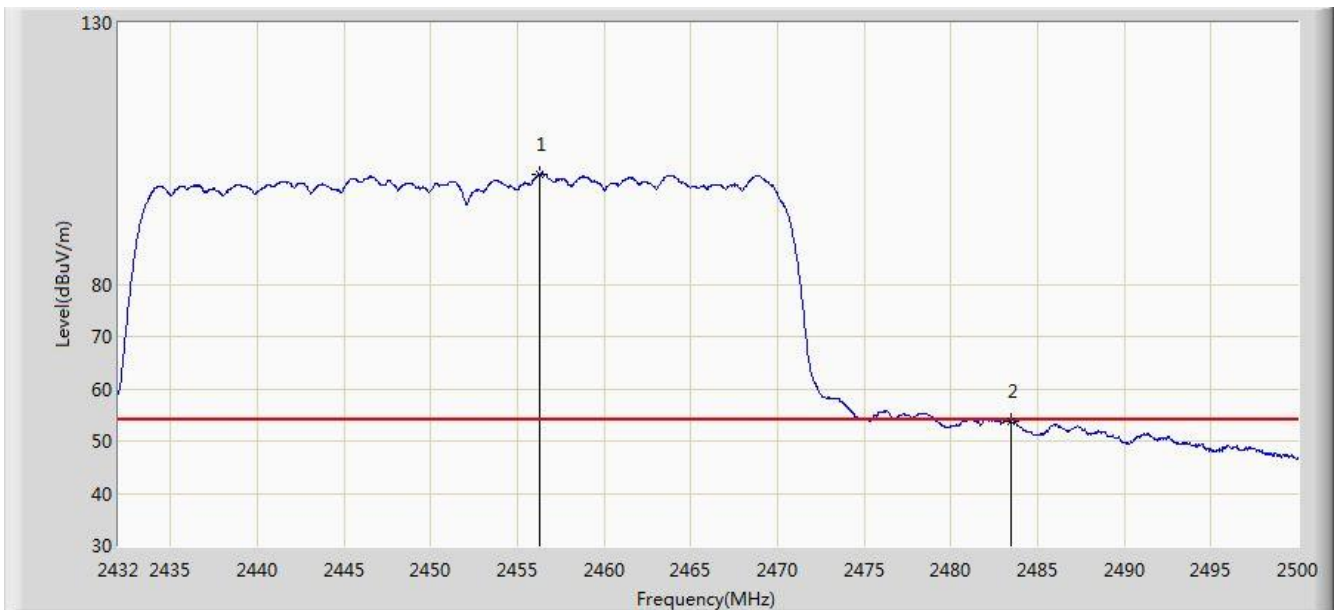


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.276	101.118	68.612	N/A	N/A	32.507	AV
2			2483.500	53.696	21.115	-0.304	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	

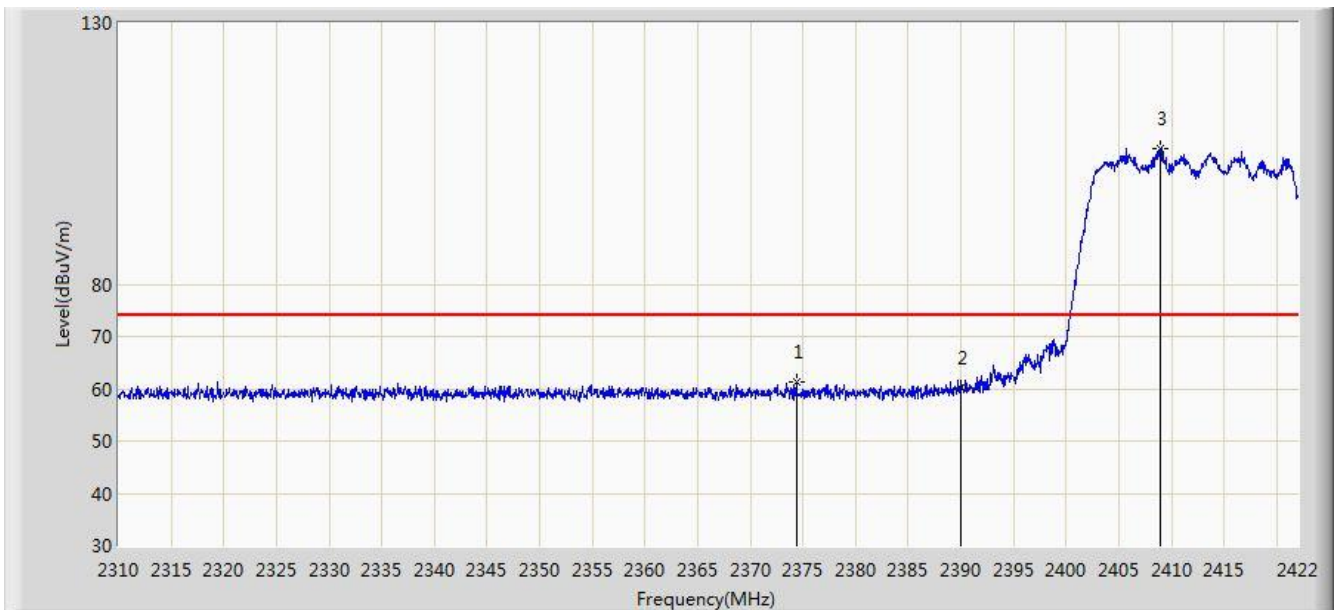


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.400	61.440	28.864	-12.560	74.000	32.576	PK
2			2390.000	60.053	27.499	-13.947	74.000	32.554	PK
3		*	2408.896	105.881	73.351	N/A	N/A	32.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	

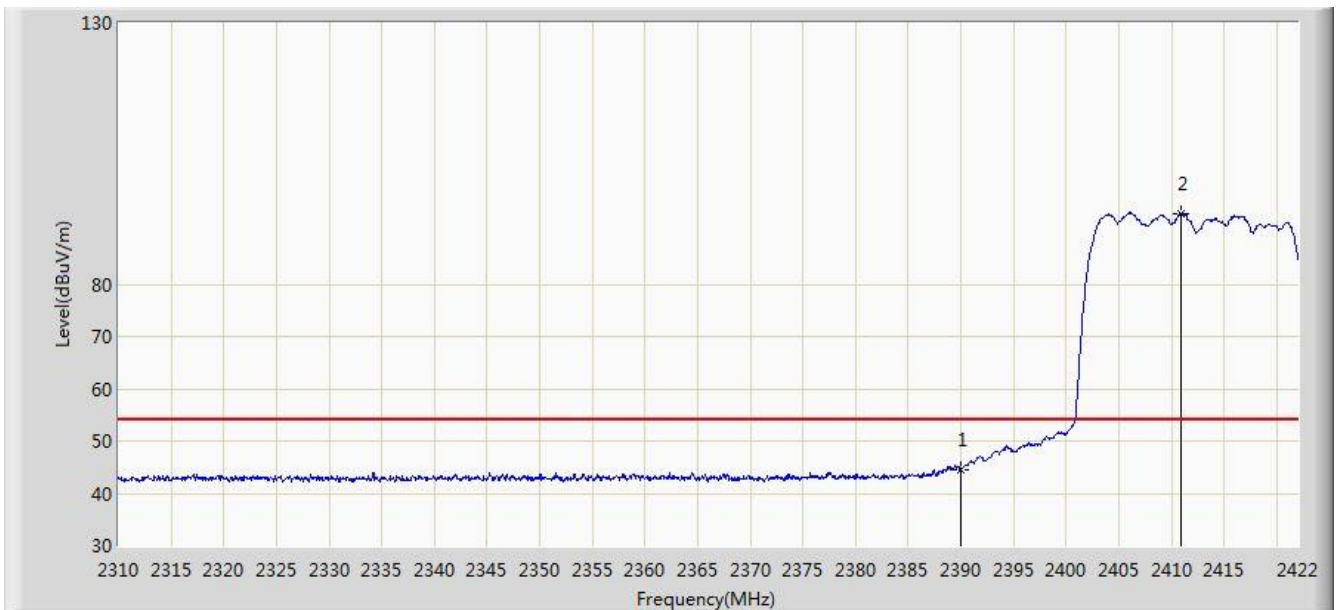


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.623	12.069	-9.377	54.000	32.554	AV
2		*	2410.912	93.606	61.079	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	

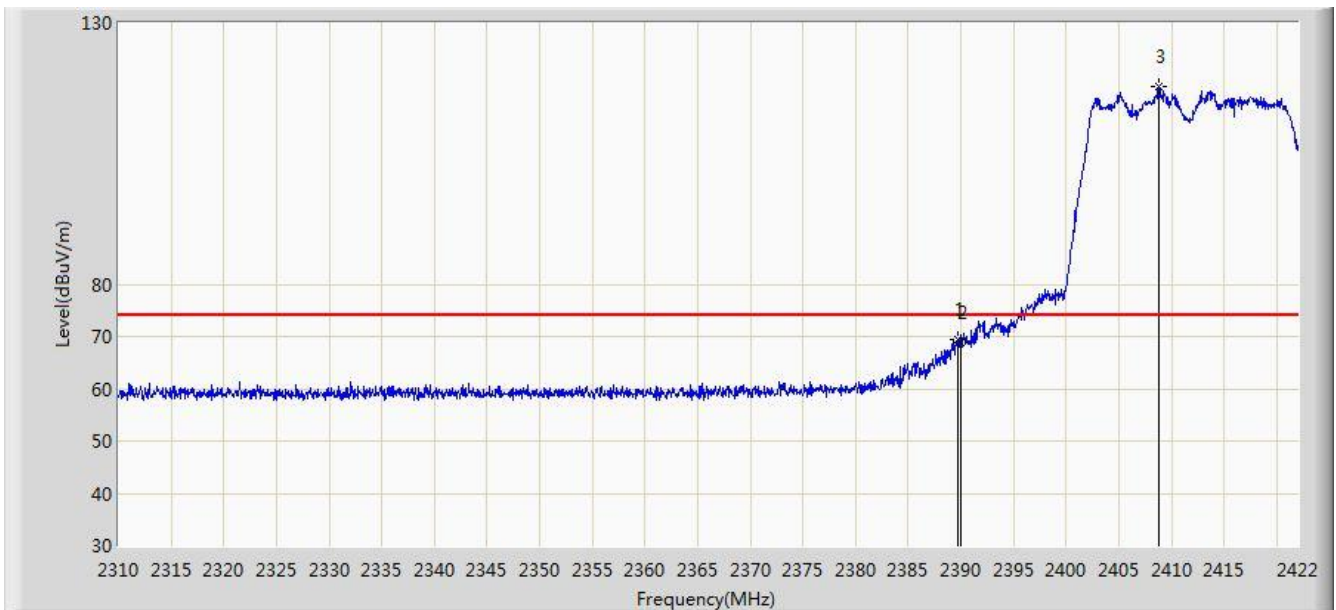


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.688	69.465	36.910	-4.535	74.000	32.555	PK
2			2390.000	68.819	36.265	-5.181	74.000	32.554	PK
3		*	2408.840	117.879	85.349	N/A	N/A	32.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	

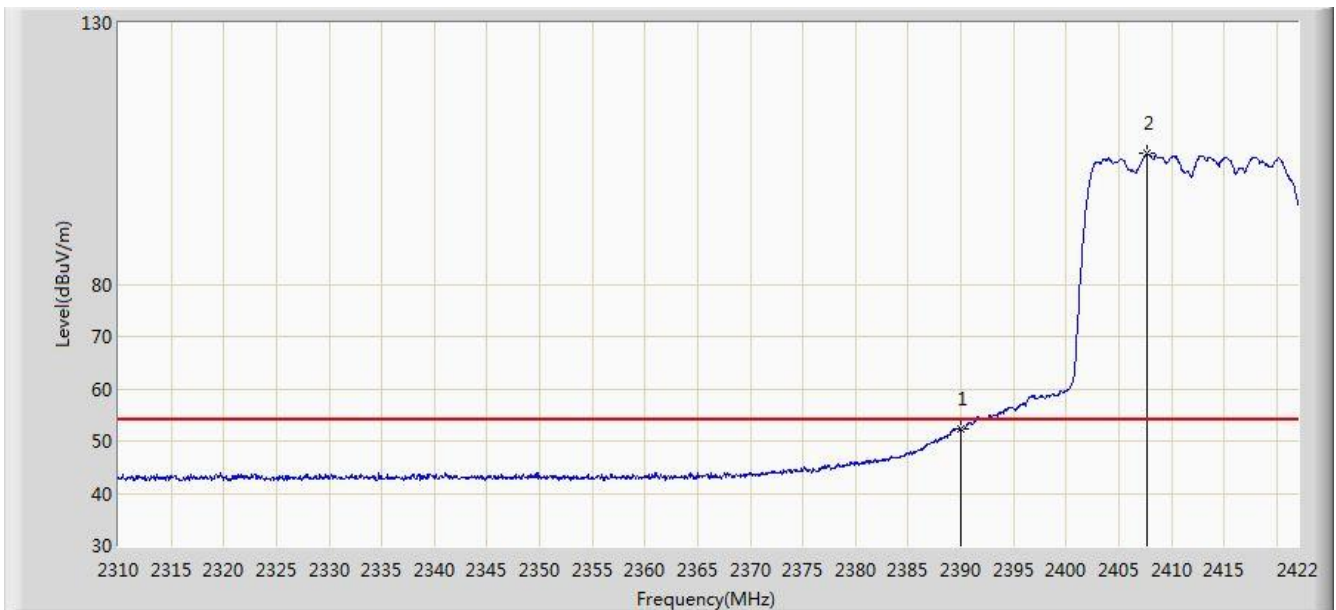


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.243	19.689	-1.757	54.000	32.554	AV
2		*	2407.720	105.012	72.481	N/A	N/A	32.531	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2417MHz (CDD Mode)	

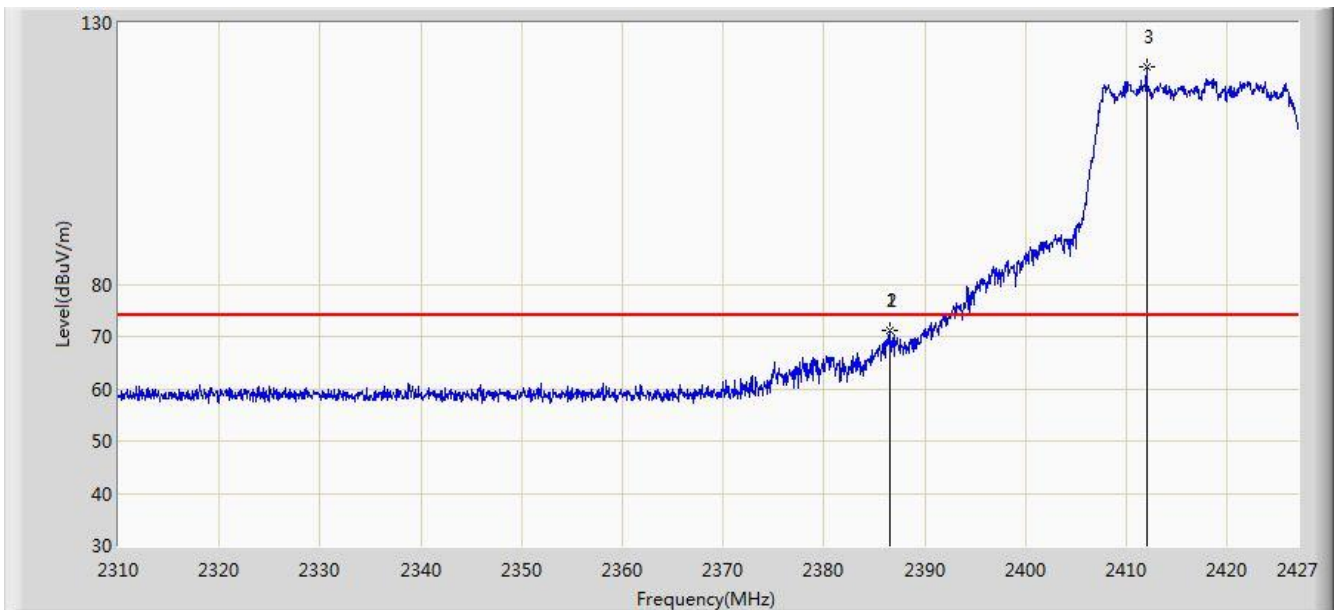


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.518	71.042	38.483	-2.958	74.000	32.559	PK
2			2386.518	71.042	38.483	-2.958	74.000	32.559	PK
3		*	2412.024	121.507	88.981	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/29 - 23:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2417MHz (CDD Mode)	

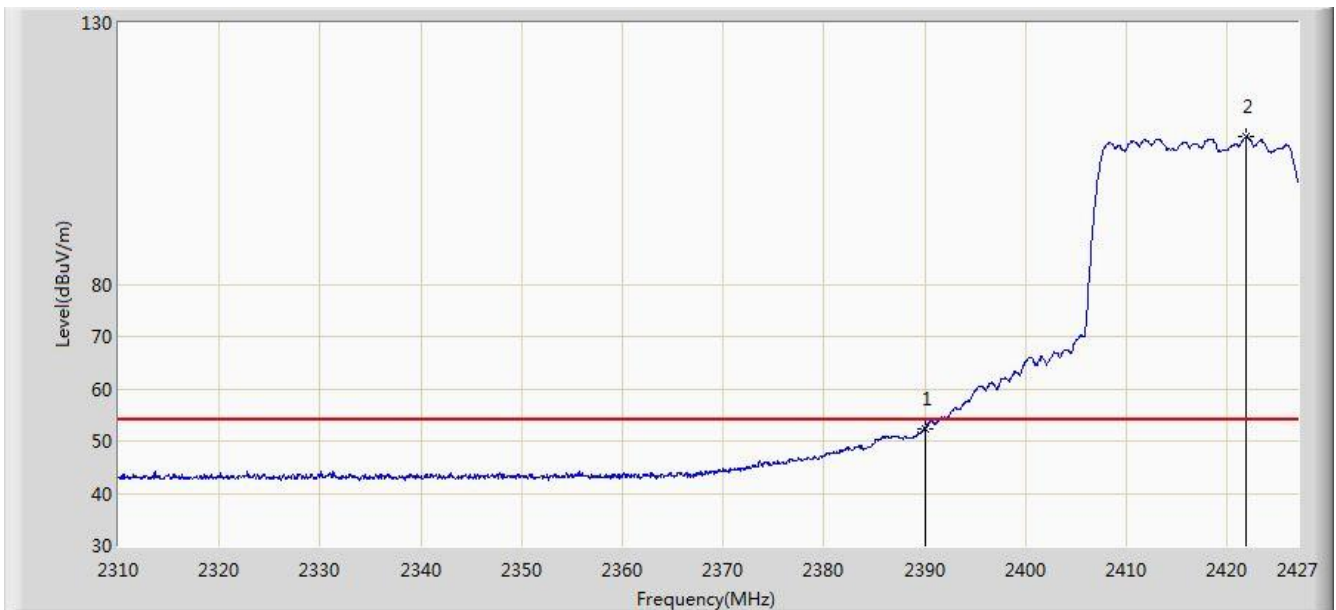


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.356	19.802	-1.644	54.000	32.554	AV
2		*	2421.910	108.135	75.621	N/A	N/A	32.514	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	

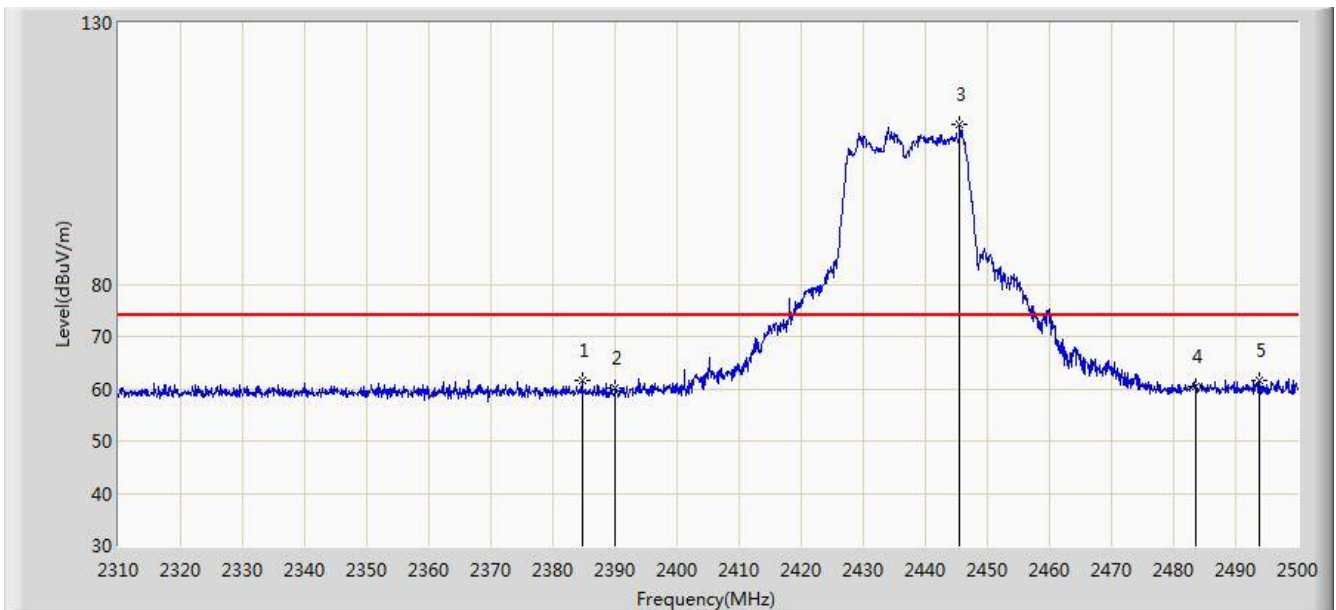


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.670	61.550	28.988	-12.450	74.000	32.562	PK
2			2390.000	60.044	27.490	-13.956	74.000	32.554	PK
3		*	2445.470	110.713	78.226	N/A	N/A	32.487	PK
4			2483.500	60.300	27.719	-13.700	74.000	32.580	PK
5			2493.920	61.661	29.049	-12.339	74.000	32.612	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	

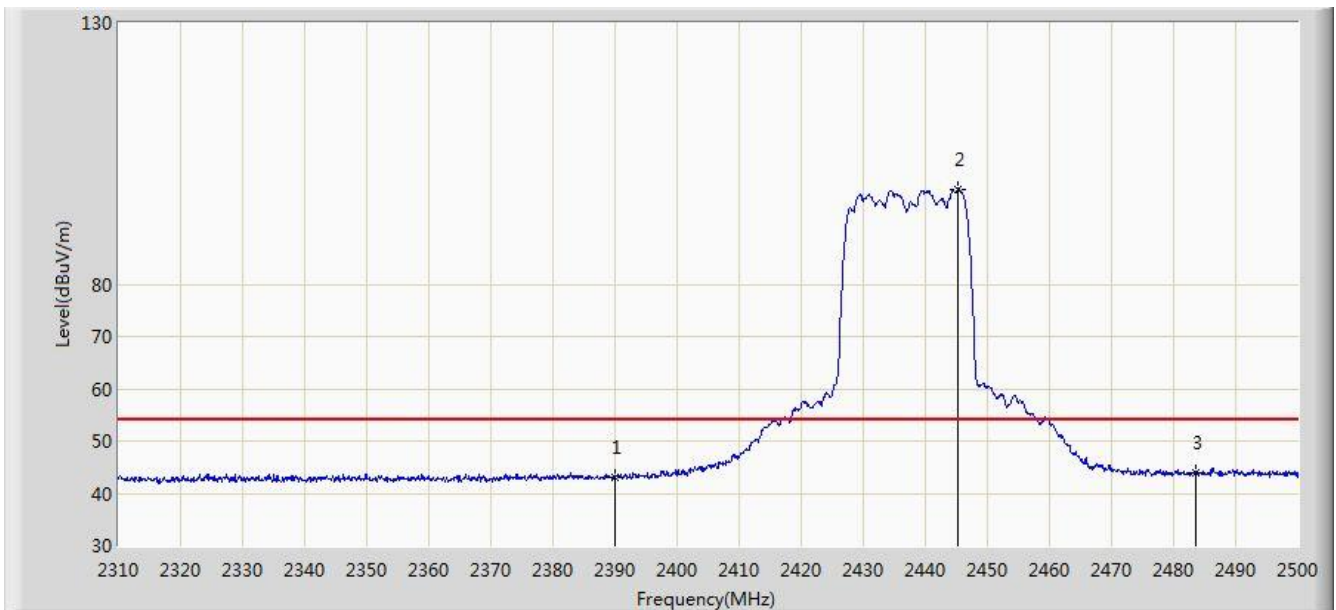


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.140	10.586	-10.860	54.000	32.554	AV
2		*	2445.185	98.172	65.685	N/A	N/A	32.487	AV
3			2483.500	44.006	11.425	-9.994	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	

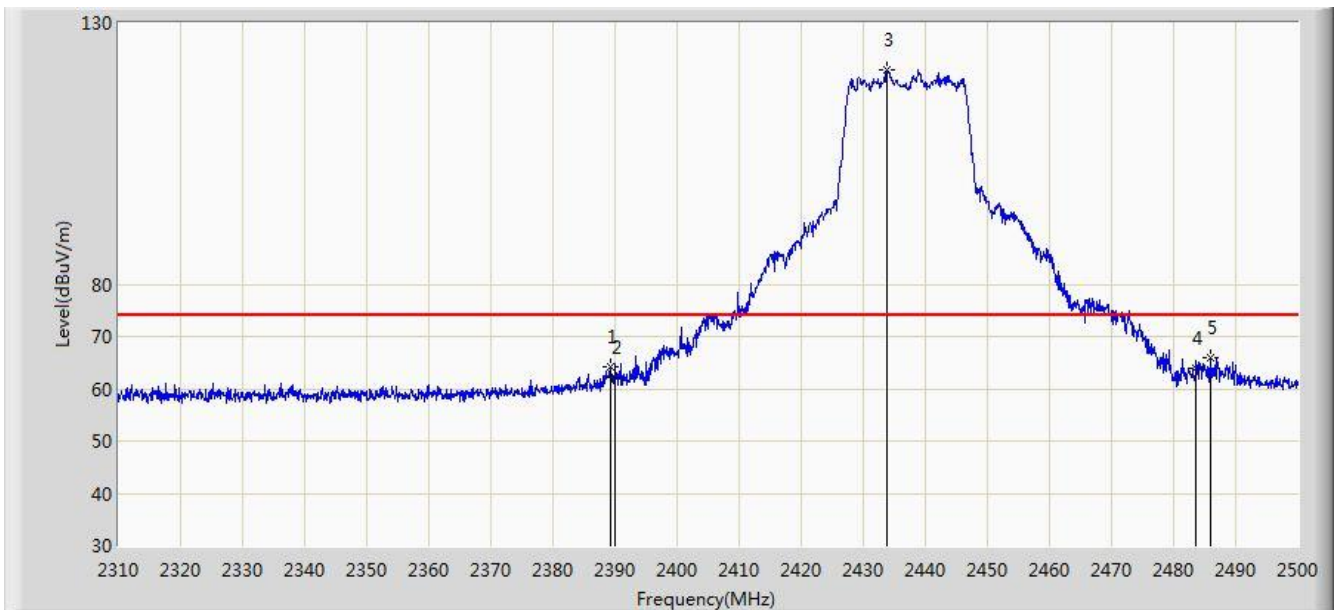


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.325	64.331	31.776	-9.669	74.000	32.555	PK
2			2390.000	62.180	29.626	-11.820	74.000	32.554	PK
3		*	2433.785	120.874	88.374	N/A	N/A	32.500	PK
4			2483.500	63.817	31.236	-10.183	74.000	32.580	PK
5			2486.035	65.916	33.328	-8.084	74.000	32.588	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	

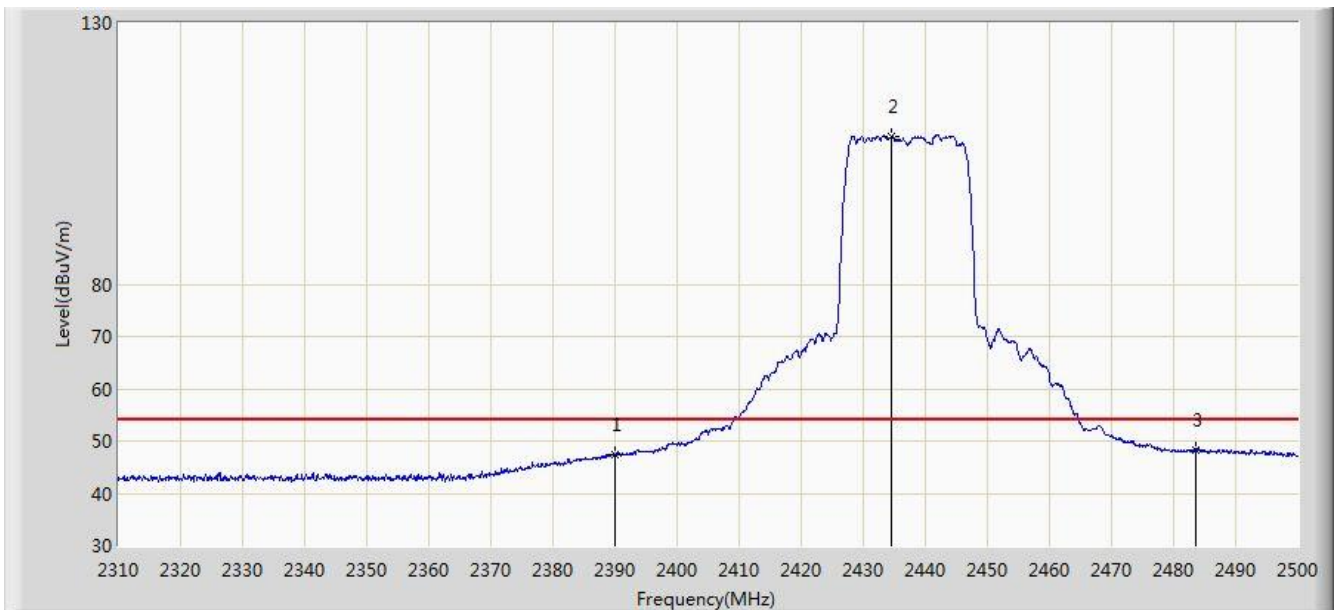


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.472	14.918	-6.528	54.000	32.554	AV
2		*	2434.545	108.357	75.858	N/A	N/A	32.499	AV
3			2483.500	48.334	15.753	-5.666	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2447MHz (CDD Mode)	

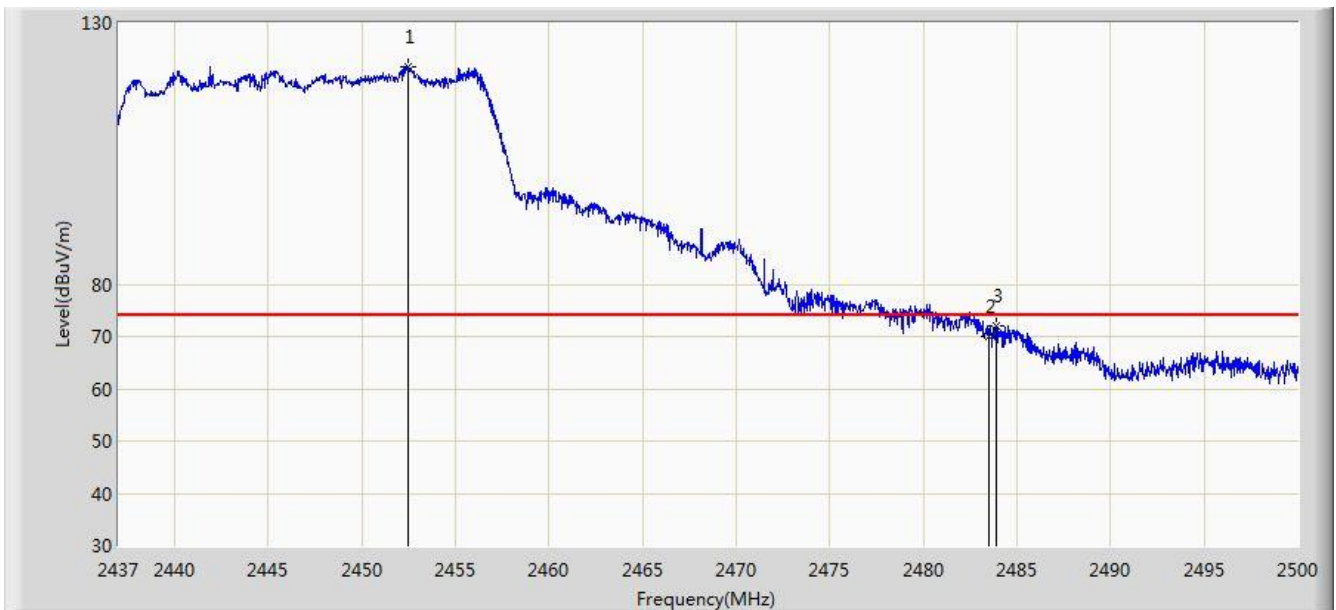


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.435	121.488	88.988	N/A	N/A	32.499	PK
2			2483.500	70.062	37.481	-3.938	74.000	32.580	PK
3			2483.872	71.919	39.337	-2.081	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2447MHz (CDD Mode)	

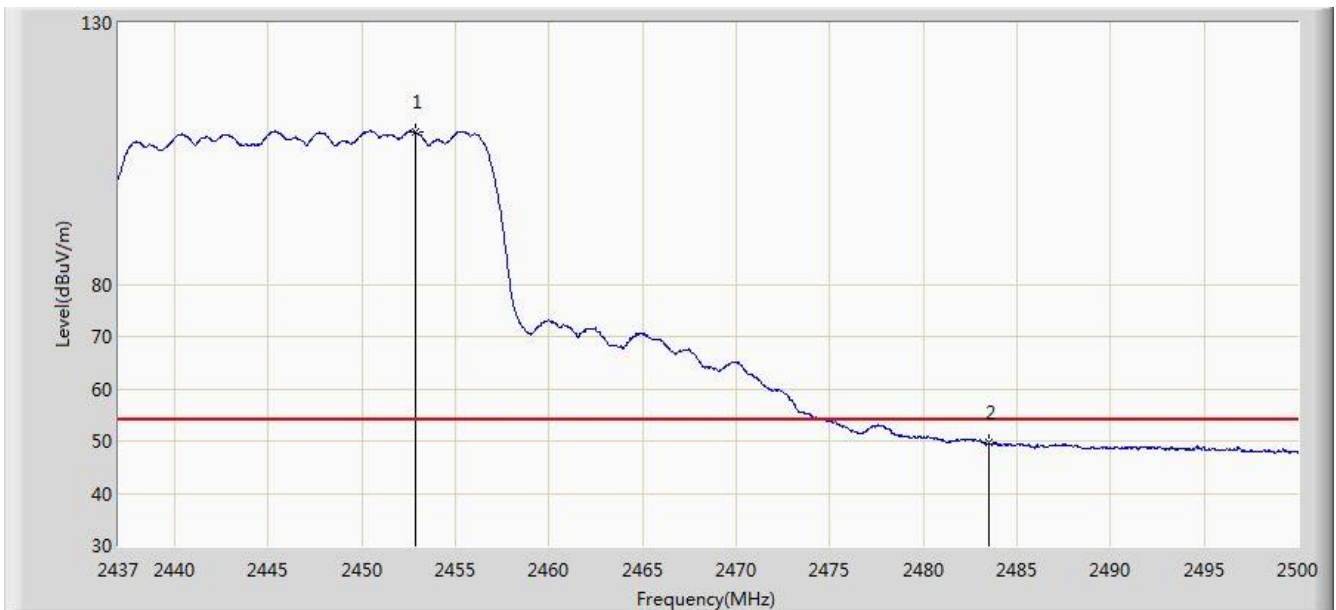


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.844	109.243	76.743	N/A	N/A	32.501	AV
2			2483.500	49.595	17.014	-4.405	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2452MHz (CDD Mode)	

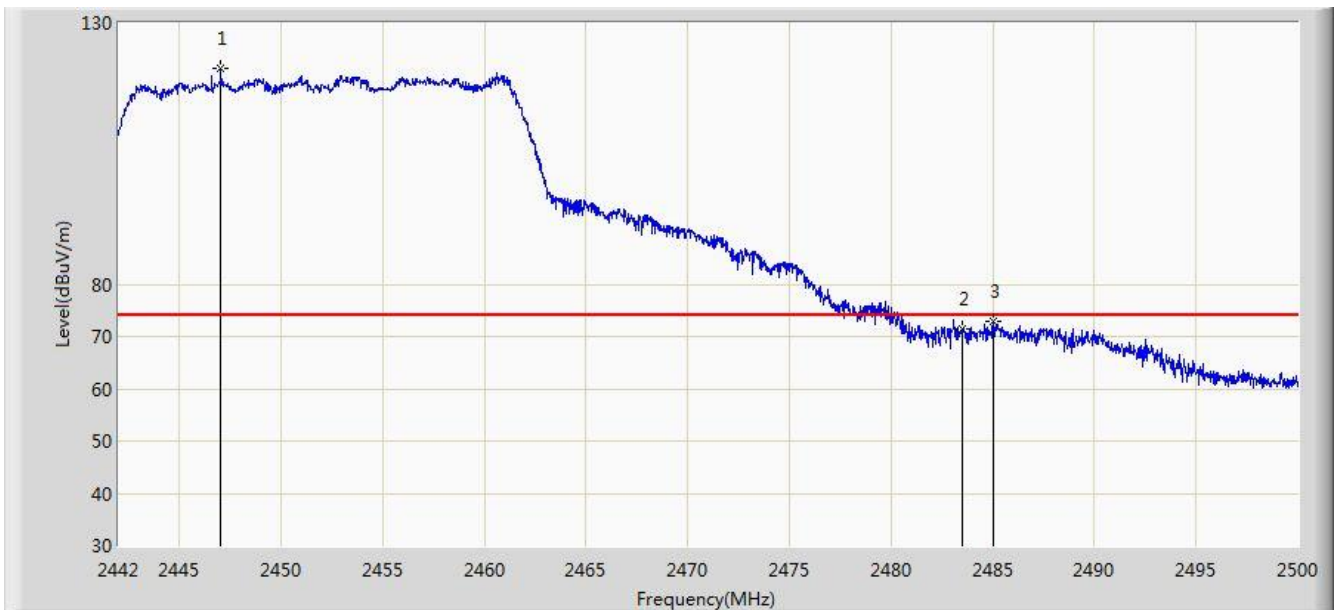


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2447.017	121.187	88.697	N/A	N/A	32.490	PK
2			2483.500	71.489	38.908	-2.511	74.000	32.580	PK
3			2485.007	72.954	40.369	-1.046	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2452MHz (CDD Mode)	

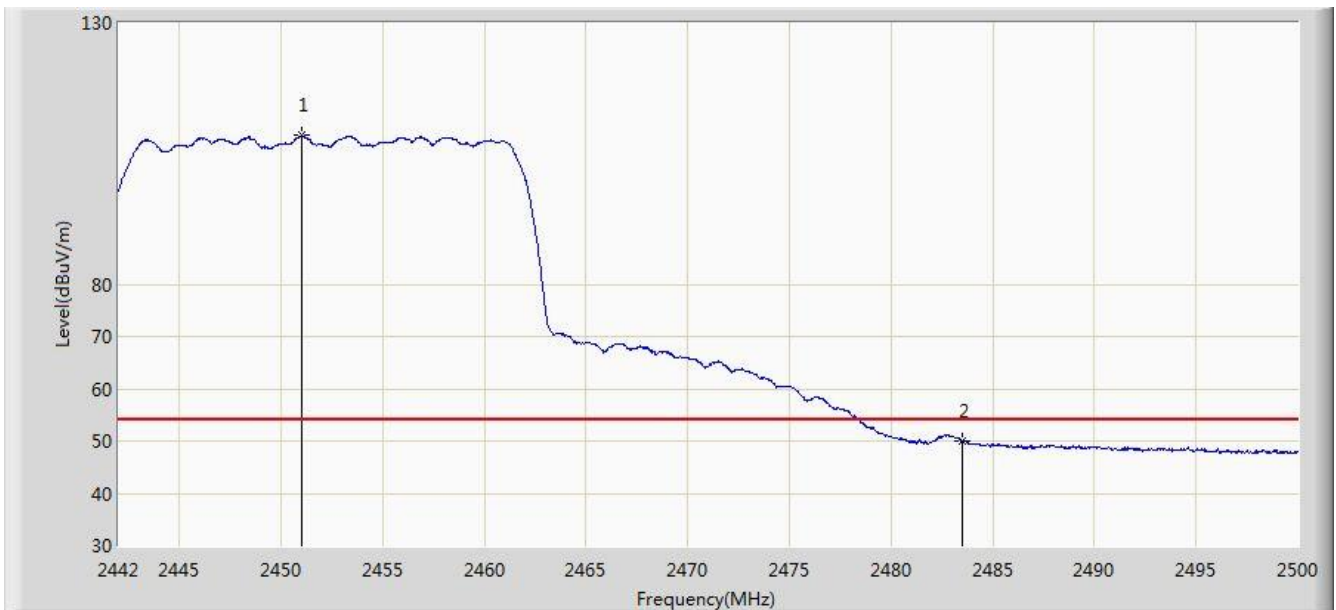

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.990	108.497	76.000	N/A	N/A	32.497	AV
2			2483.500	50.014	17.433	-3.986	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2457MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.819	120.781	88.270	N/A	N/A	32.511	PK
2			2483.500	73.522	40.941	-0.478	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2457MHz (CDD Mode)	

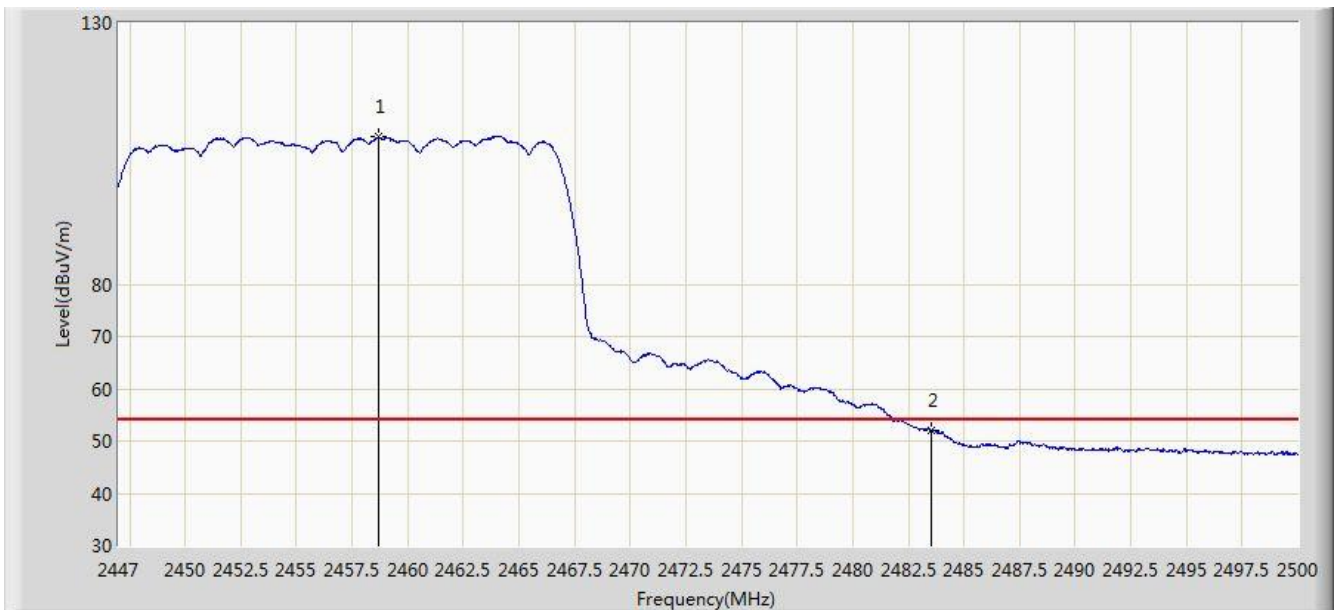


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.660	108.163	75.653	N/A	N/A	32.510	AV
2			2483.500	52.118	19.537	-1.882	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	

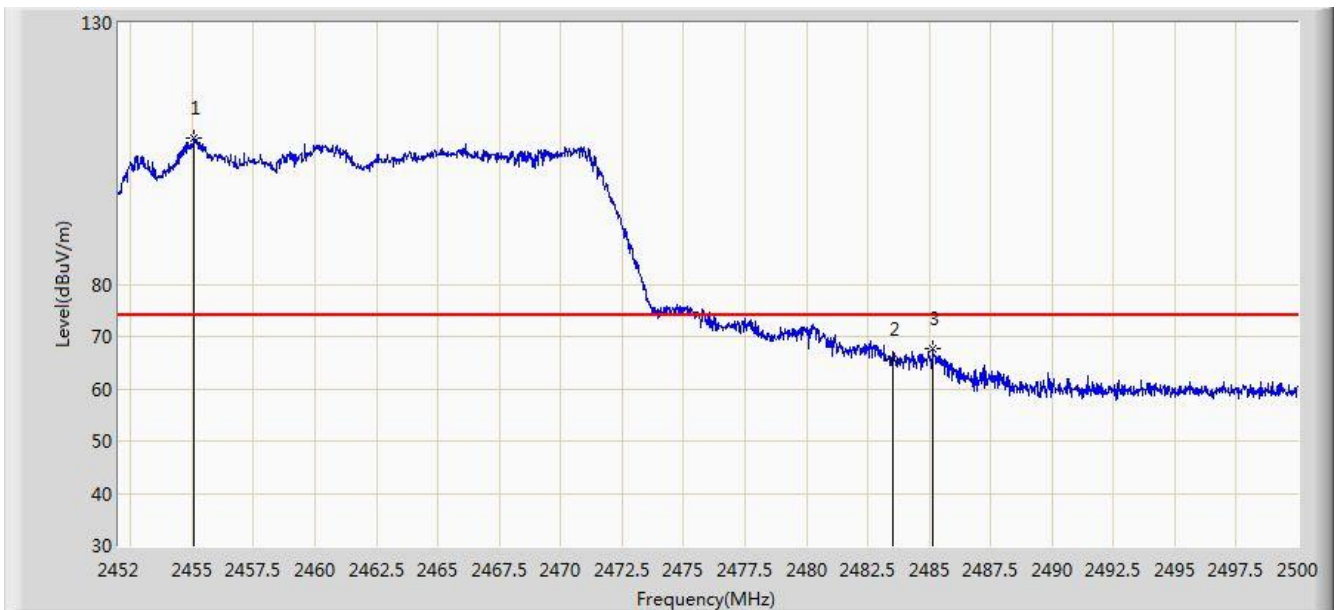


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.072	107.918	75.414	N/A	N/A	32.504	PK
2			2483.500	65.764	33.183	-8.236	74.000	32.580	PK
3			2485.120	67.653	35.068	-6.347	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	

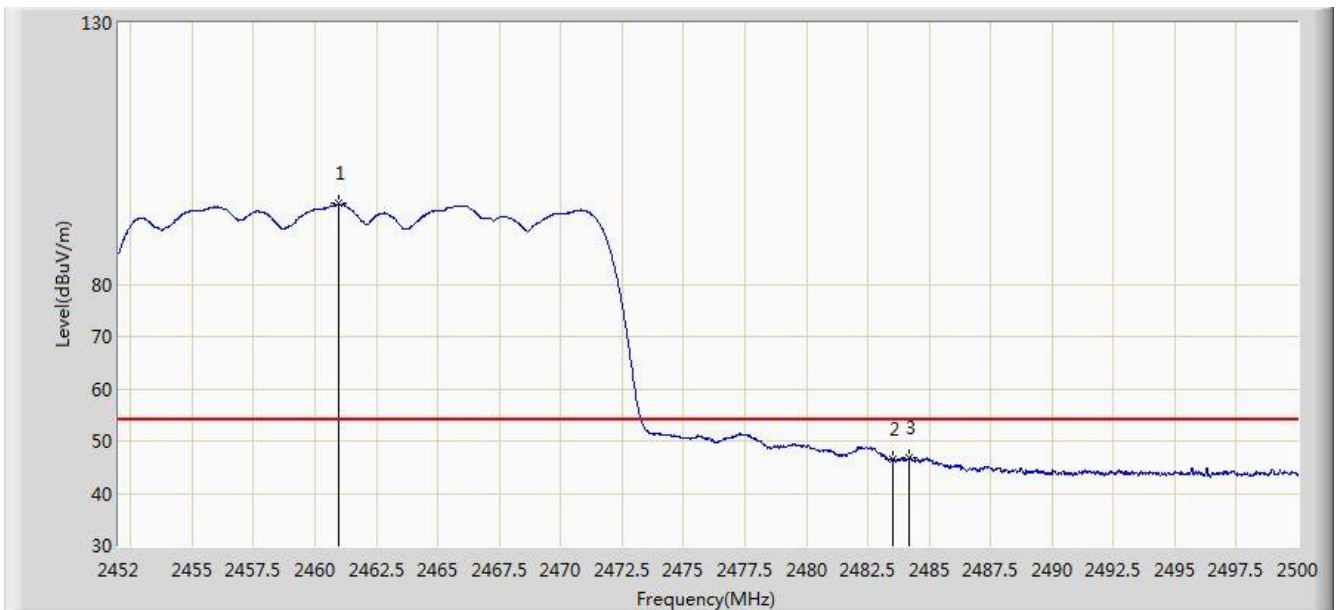


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.976	95.383	62.868	N/A	N/A	32.514	AV
2			2483.500	46.500	13.919	-7.500	54.000	32.580	AV
3			2484.184	46.873	14.290	-7.127	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	

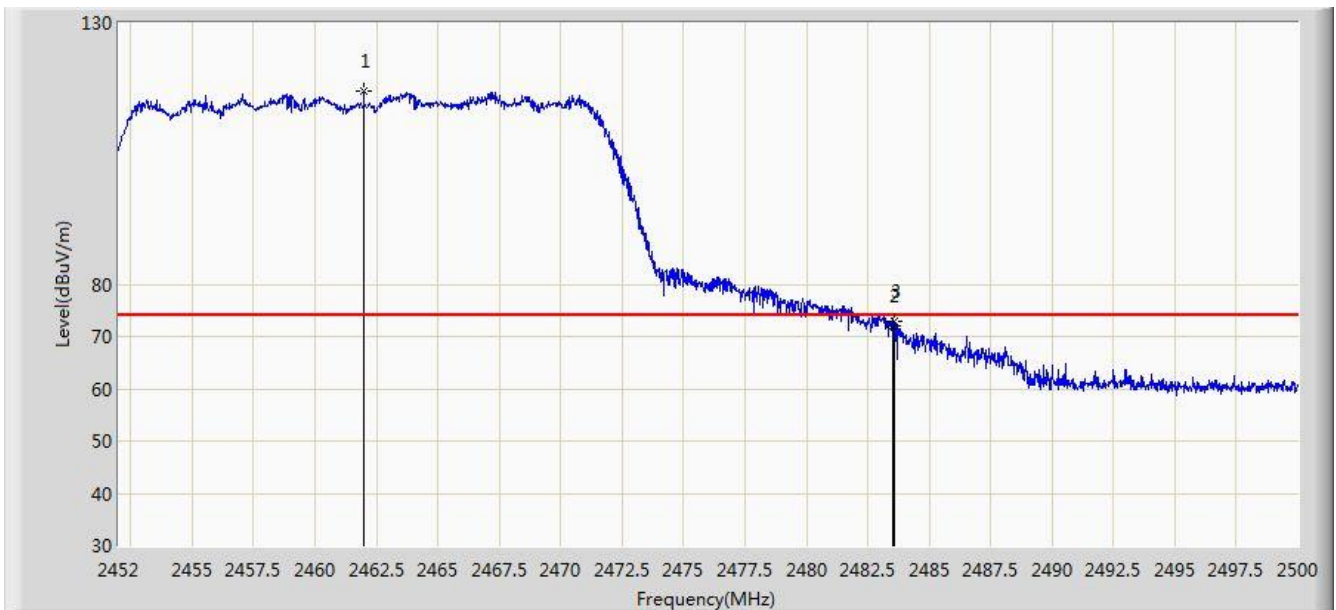


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.984	116.824	84.308	N/A	N/A	32.516	PK
2			2483.500	71.915	39.334	-2.085	74.000	32.580	PK
3			2483.608	72.786	40.205	-1.214	74.000	32.581	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	

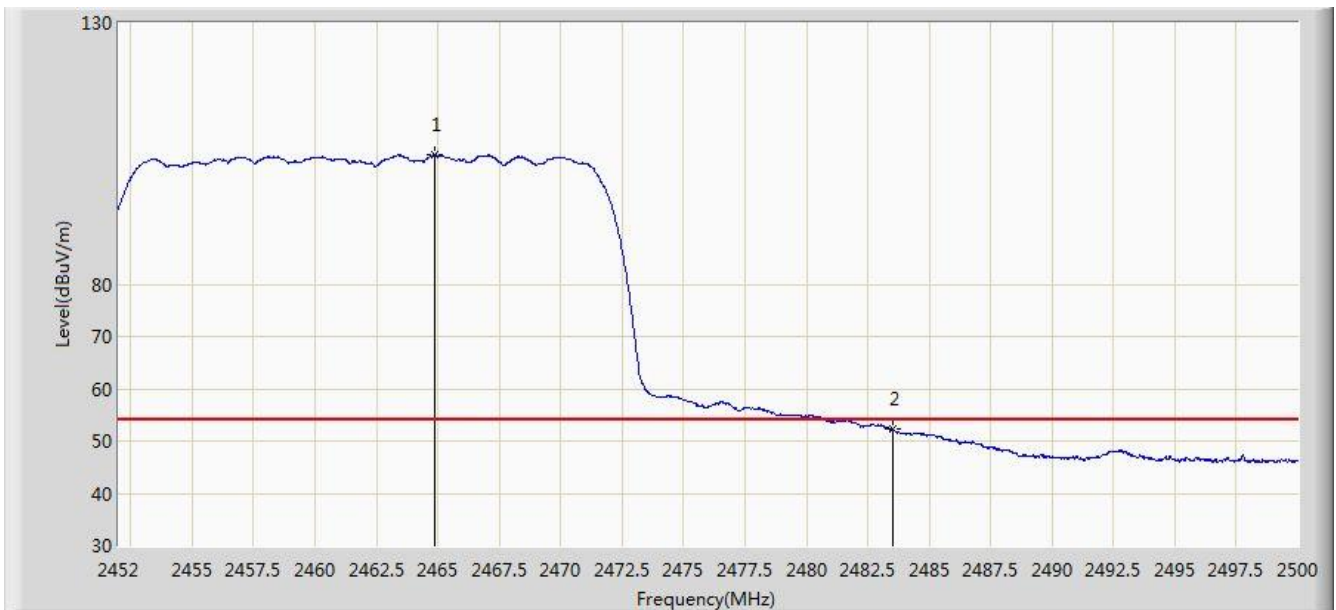


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.864	104.723	72.198	N/A	N/A	32.525	AV
2			2483.500	52.241	19.660	-1.759	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	

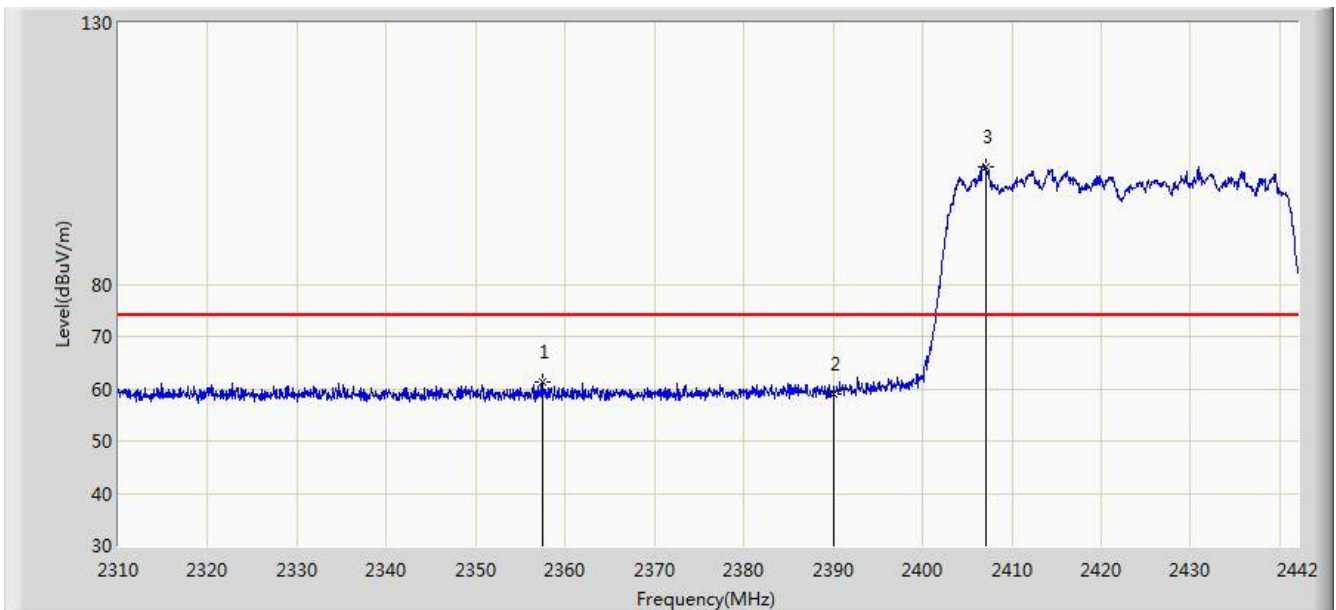


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2357.520	61.308	28.705	-12.692	74.000	32.602	PK
2			2390.000	58.863	26.309	-15.137	74.000	32.554	PK
3		*	2407.086	102.561	70.029	N/A	N/A	32.532	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	

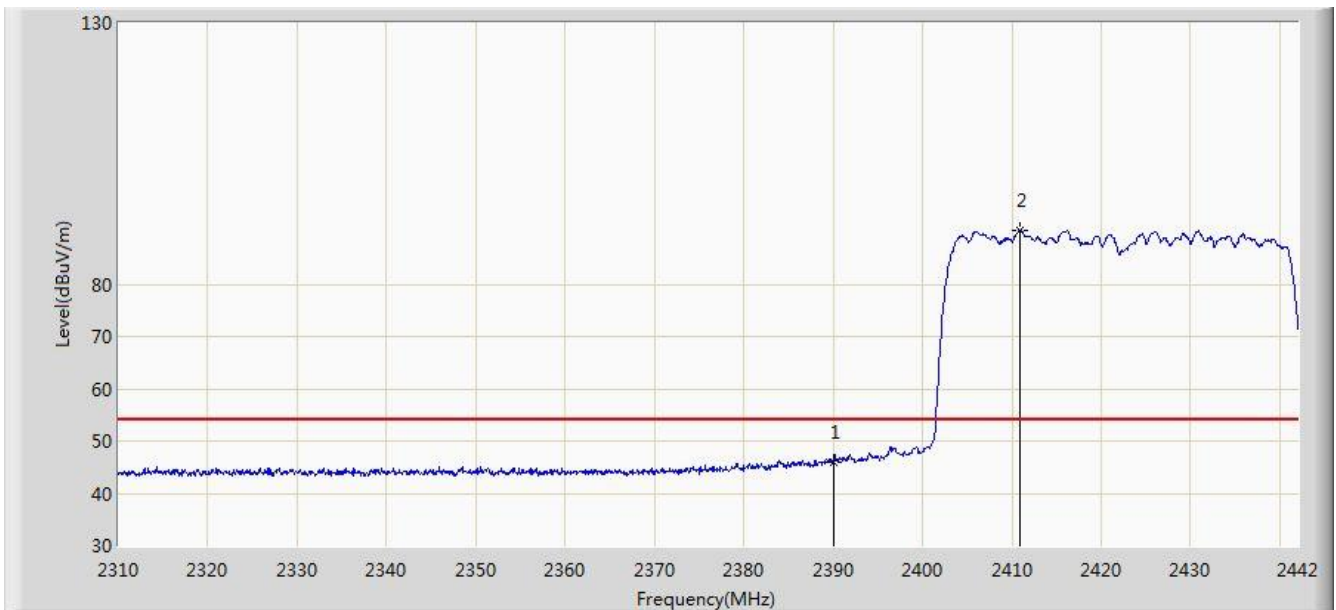


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.025	13.471	-7.975	54.000	32.554	AV
2		*	2410.980	90.233	57.706	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	

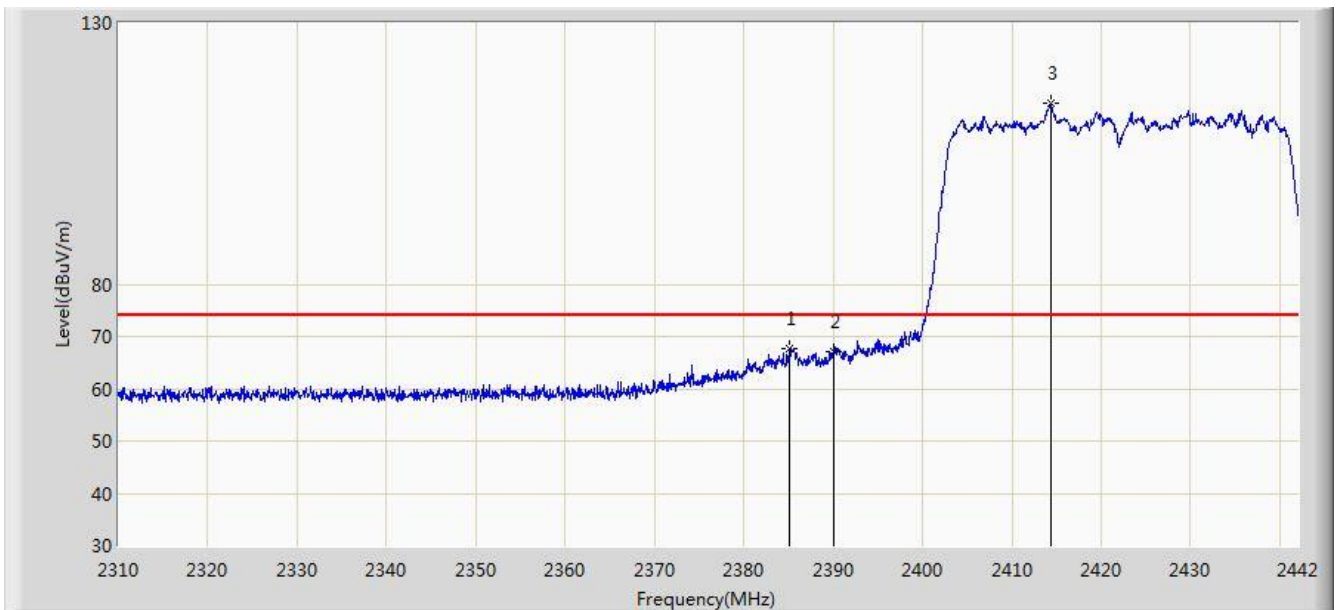


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.174	67.776	35.215	-6.224	74.000	32.561	PK
2			2390.000	67.076	34.522	-6.924	74.000	32.554	PK
3		*	2414.412	114.617	82.094	N/A	N/A	32.523	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	

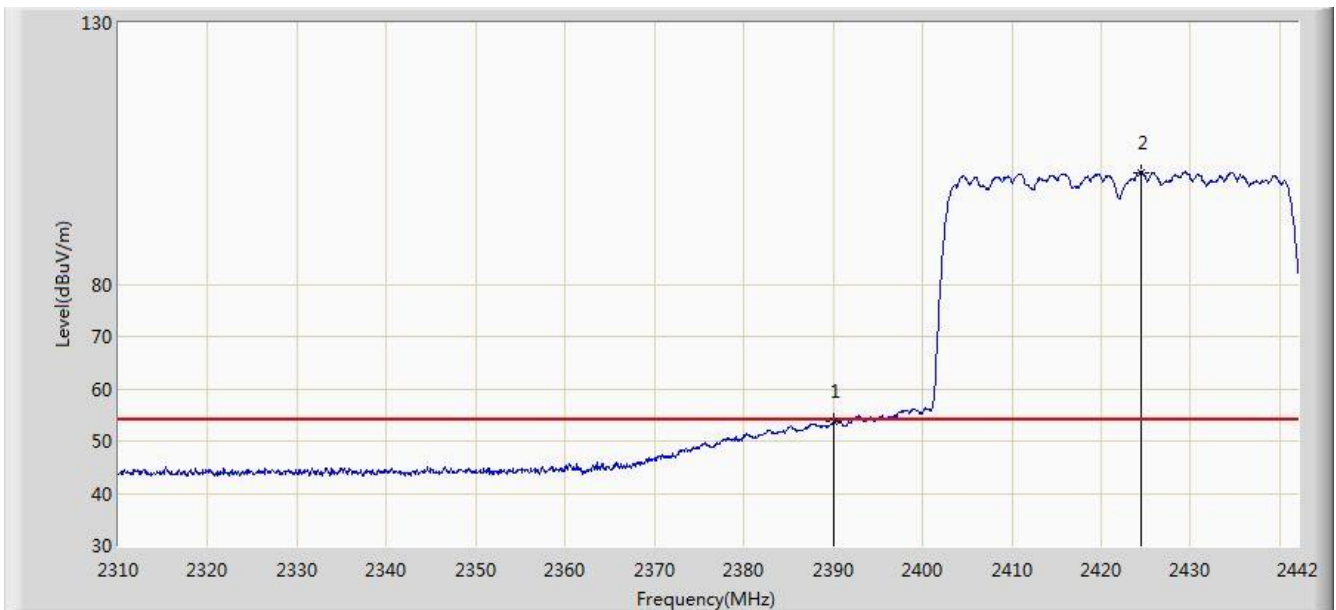


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.639	21.085	-0.361	54.000	32.554	AV
2		*	2424.510	101.443	68.932	N/A	N/A	32.510	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2427MHz (CDD Mode)	

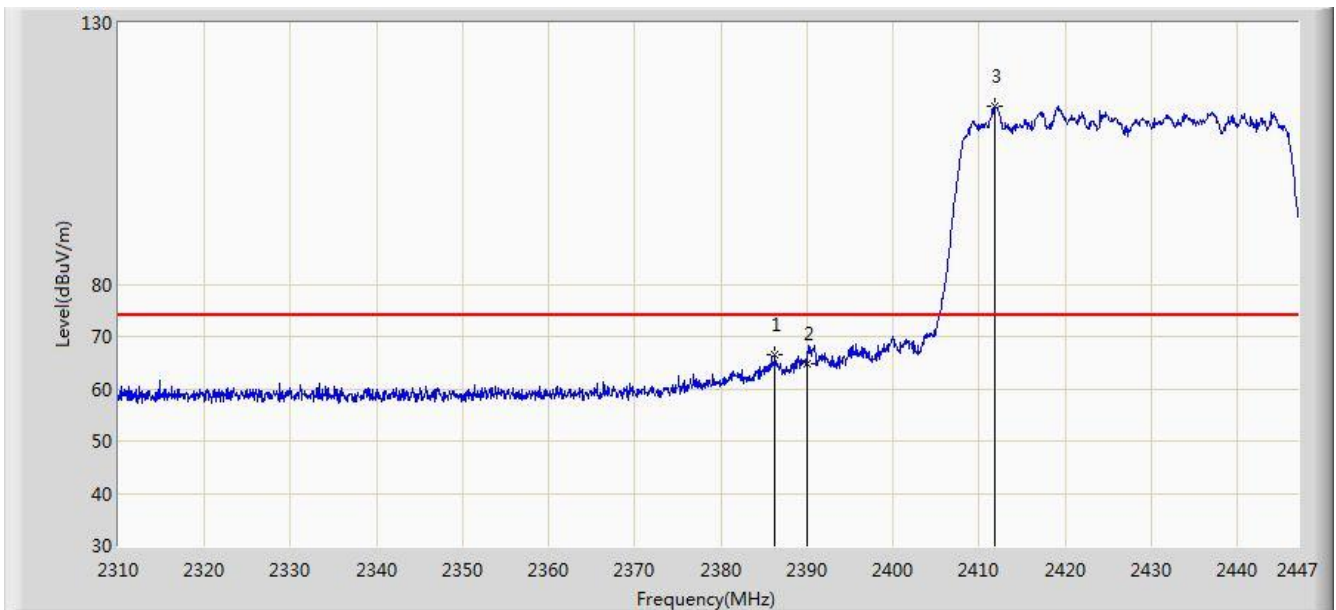


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.240	66.379	33.819	-7.621	74.000	32.560	PK
2			2390.000	64.825	32.271	-9.175	74.000	32.554	PK
3		*	2411.791	114.090	81.564	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2427MHz (CDD Mode)	

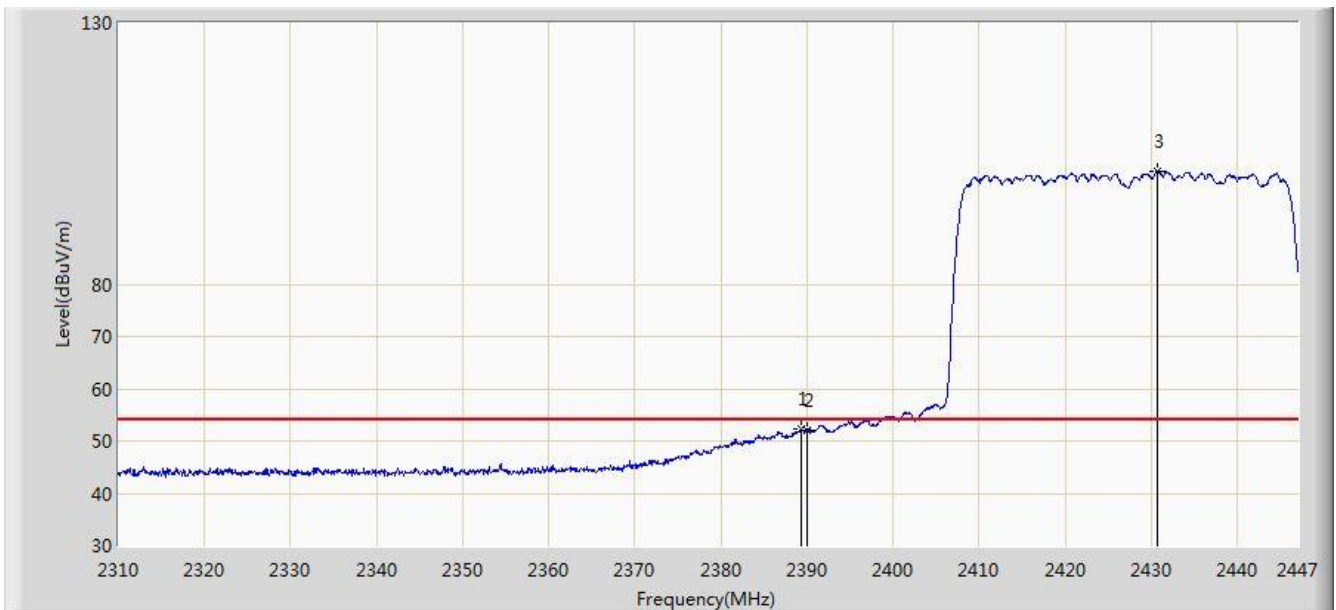


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.254	52.180	19.625	-1.820	54.000	32.555	AV
2			2390.000	52.168	19.614	-1.832	54.000	32.554	AV
3		*	2430.765	101.633	69.130	N/A	N/A	32.503	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 00:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	

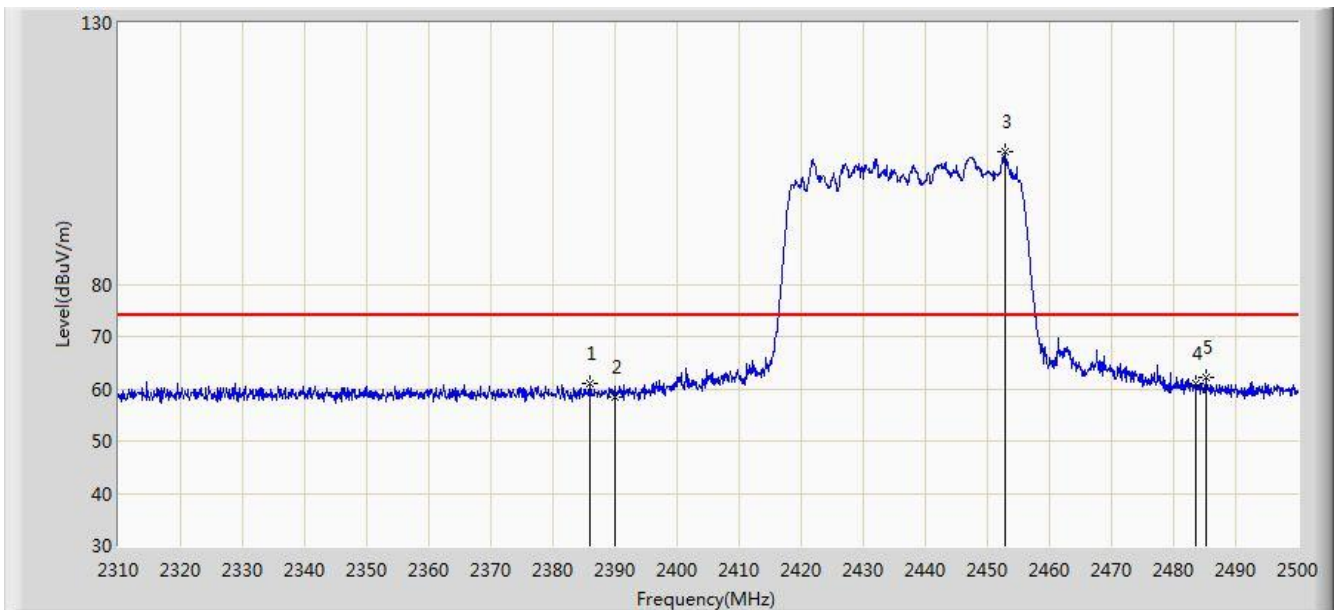


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.000	60.900	28.340	-13.100	74.000	32.560	PK
2			2390.000	58.459	25.905	-15.541	74.000	32.554	PK
3		*	2452.880	105.364	72.864	N/A	N/A	32.501	PK
4			2483.500	61.021	28.440	-12.979	74.000	32.580	PK
5			2485.180	62.253	29.667	-11.747	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	

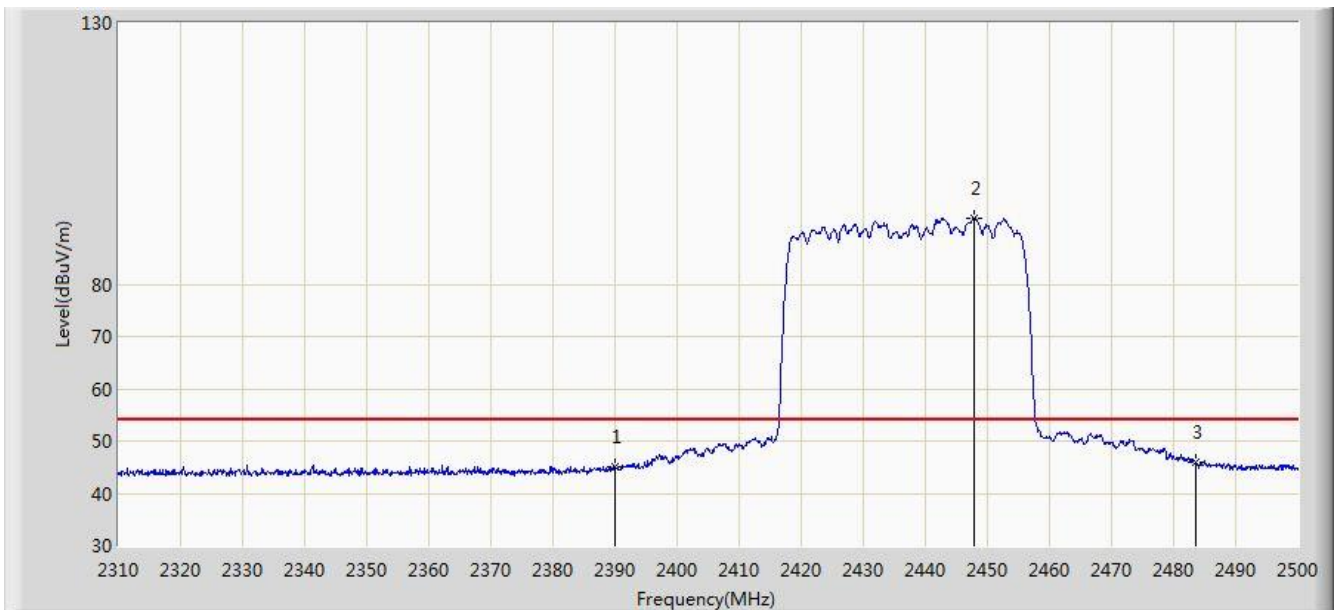


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.044	12.490	-8.956	54.000	32.554	AV
2		*	2447.845	92.579	60.088	N/A	N/A	32.492	AV
3			2483.500	45.802	13.221	-8.198	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	

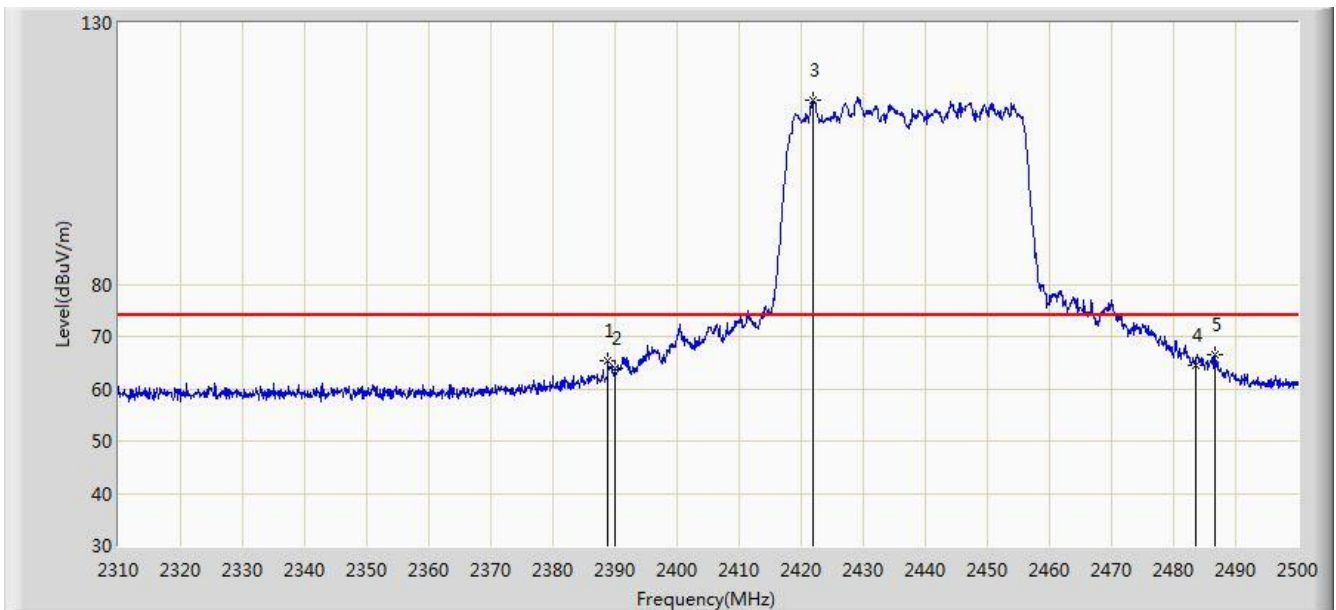


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.850	65.470	32.914	-8.530	74.000	32.556	PK
2			2390.000	63.890	31.336	-10.110	74.000	32.554	PK
3		*	2422.005	115.303	82.789	N/A	N/A	32.513	PK
4			2483.500	64.605	32.024	-9.395	74.000	32.580	PK
5			2486.605	66.517	33.927	-7.483	74.000	32.590	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	

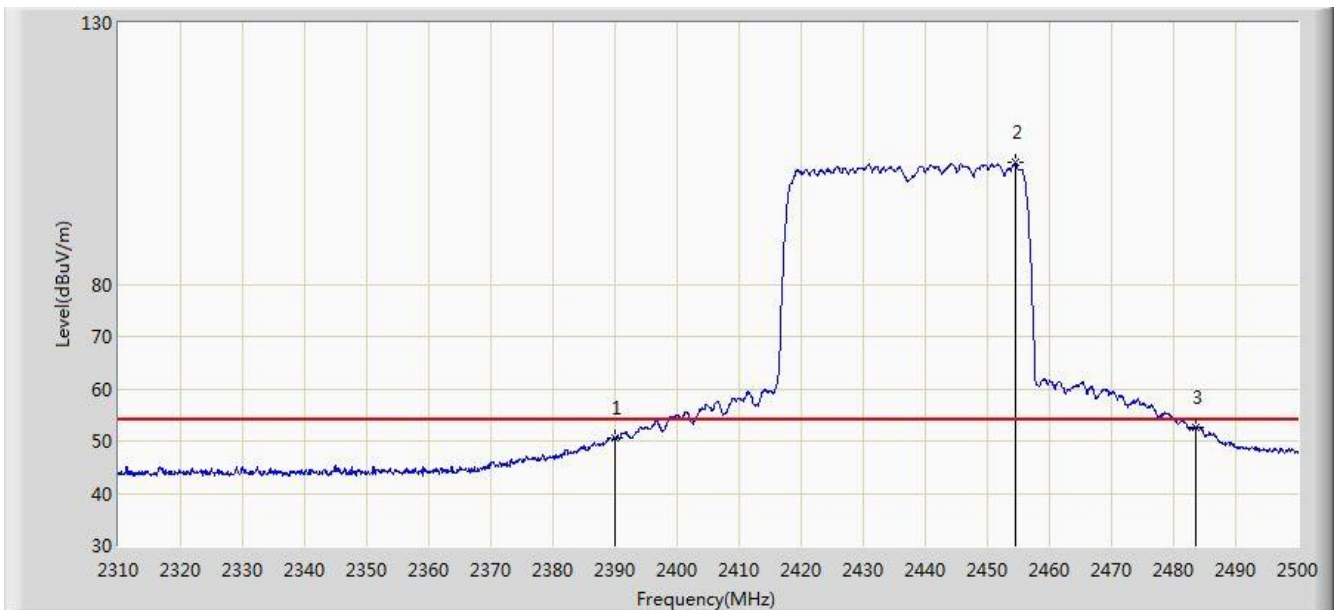


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.691	18.137	-3.309	54.000	32.554	AV
2		*	2454.495	103.220	70.717	N/A	N/A	32.504	AV
3			2483.500	52.539	19.958	-1.461	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2447MHz (CDD Mode)	

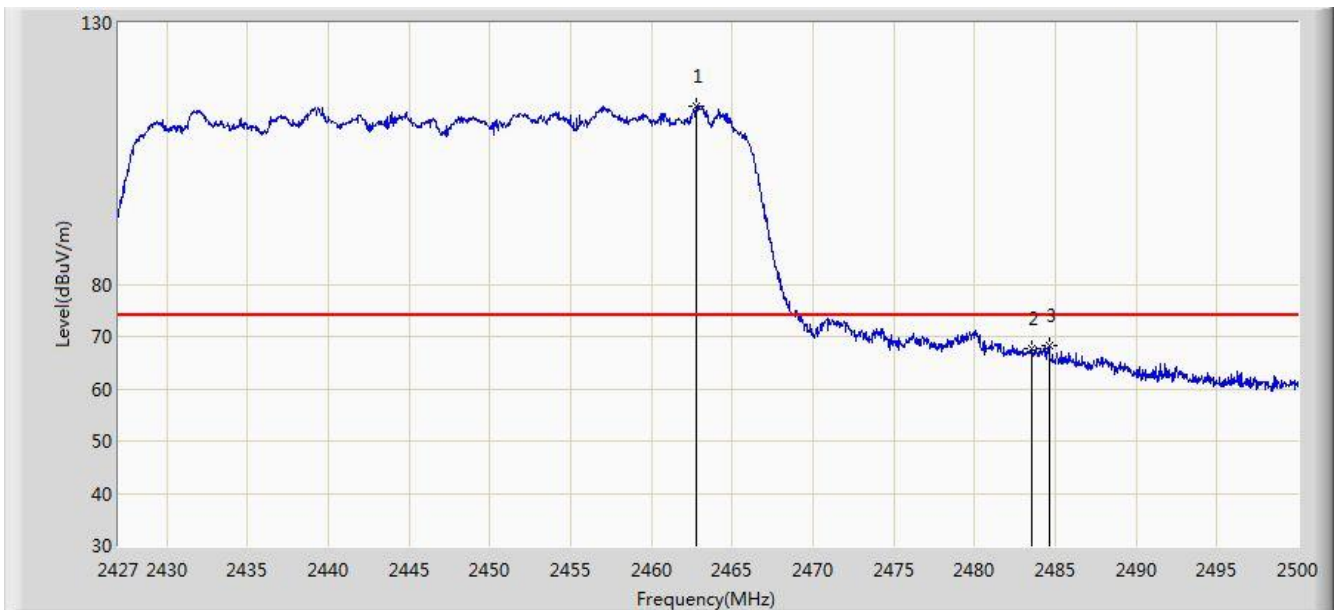


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.770	114.080	81.561	N/A	N/A	32.518	PK
2			2483.500	67.685	35.104	-6.315	74.000	32.580	PK
3			2484.597	68.244	35.660	-5.756	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2447MHz (CDD Mode)	

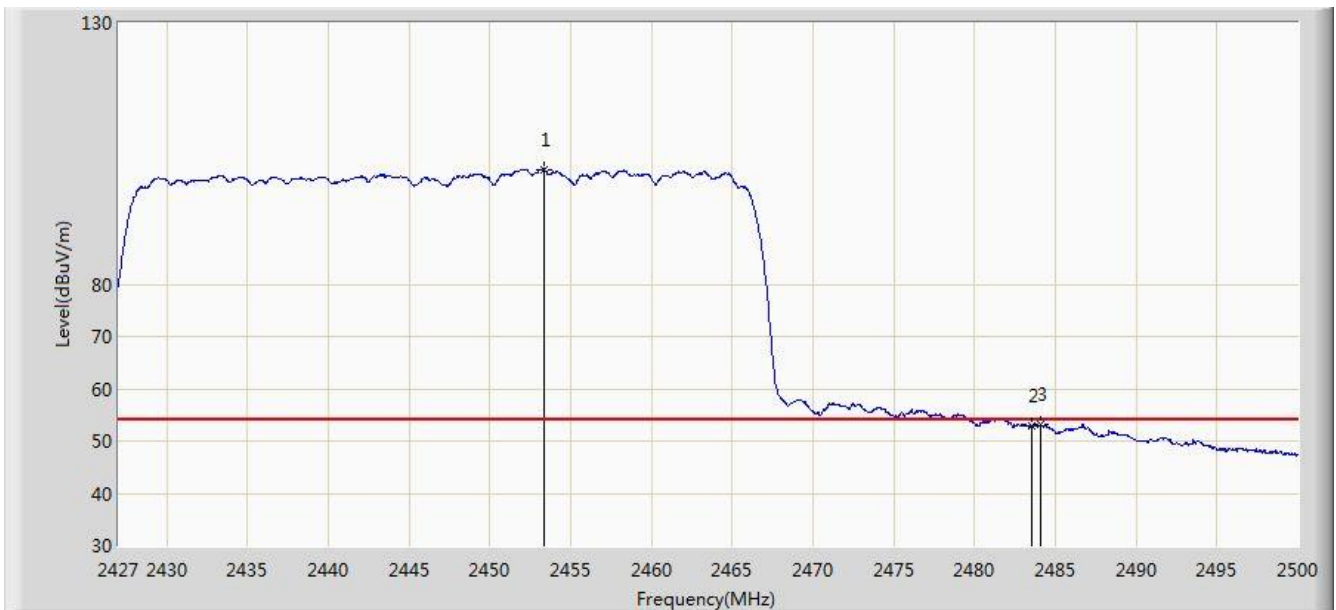


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.316	101.967	69.466	N/A	N/A	32.501	AV
2			2483.500	52.907	20.326	-1.093	54.000	32.580	AV
3			2484.050	53.170	20.588	-0.830	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	

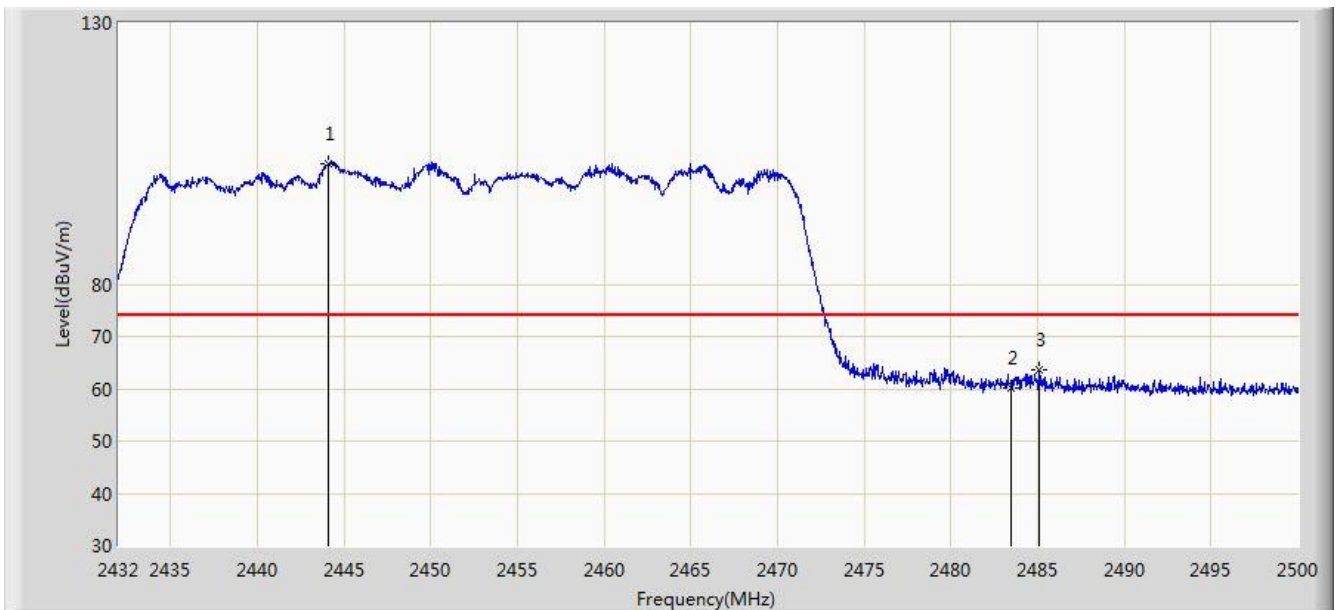


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2444.138	103.169	70.682	N/A	N/A	32.487	PK
2			2483.500	60.050	27.469	-13.950	74.000	32.580	PK
3			2485.074	63.564	30.979	-10.436	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	

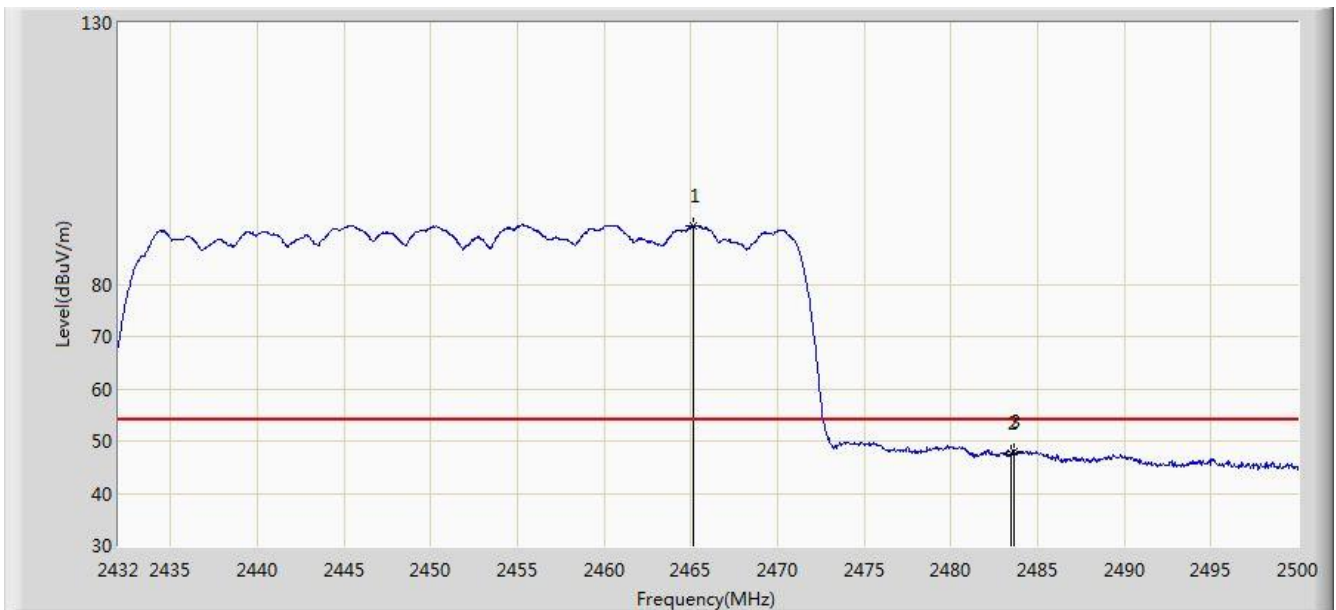


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.184	91.279	58.753	N/A	N/A	32.526	AV
2			2483.500	47.552	14.971	-6.448	54.000	32.580	AV
3			2483.612	48.039	15.458	-5.961	54.000	32.581	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	

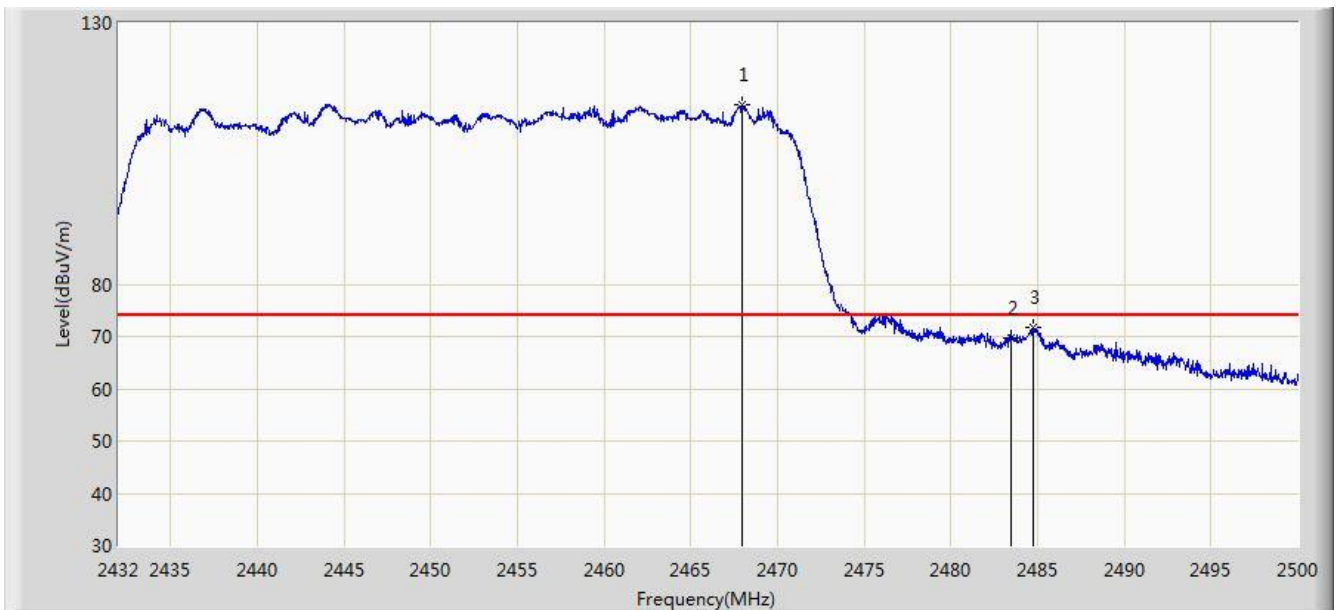


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.938	114.344	81.810	C	N/A	32.533	PK
2			2483.500	69.586	37.005	-4.414	74.000	32.580	PK
3			2484.768	71.804	39.220	-2.196	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/01/30 - 01:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	

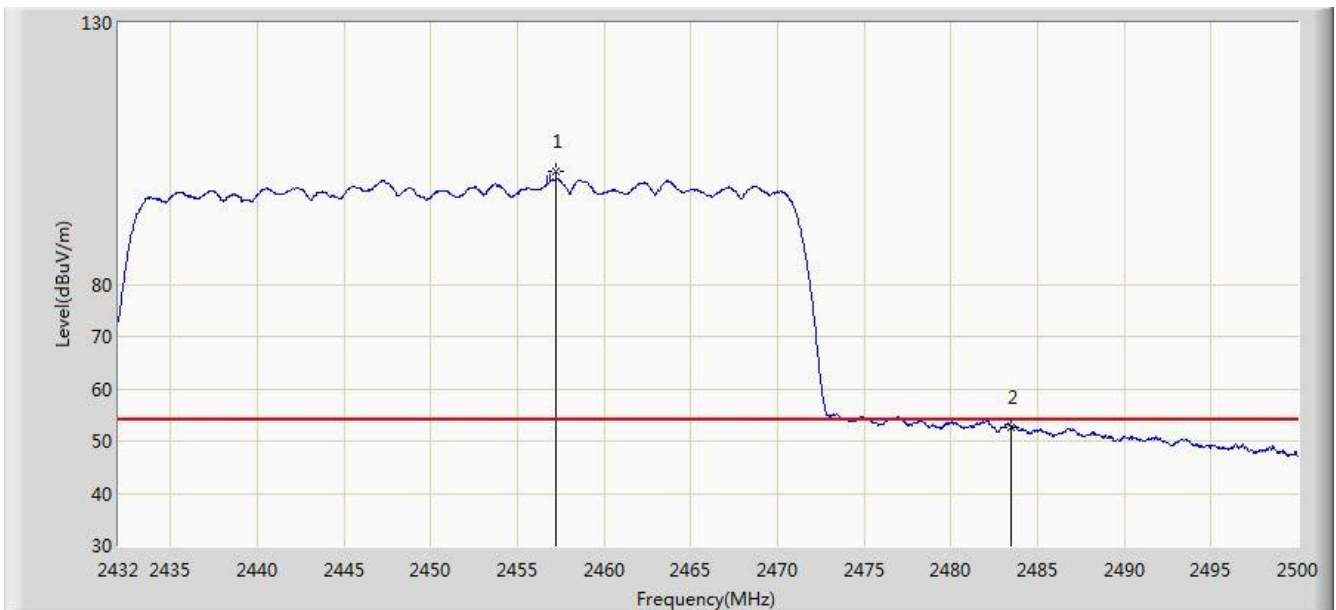


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.228	101.685	69.177	N/A	N/A	32.508	AV
2			2483.500	52.669	20.088	-1.331	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 14:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2412MHz (Beam-Forming Mode)	

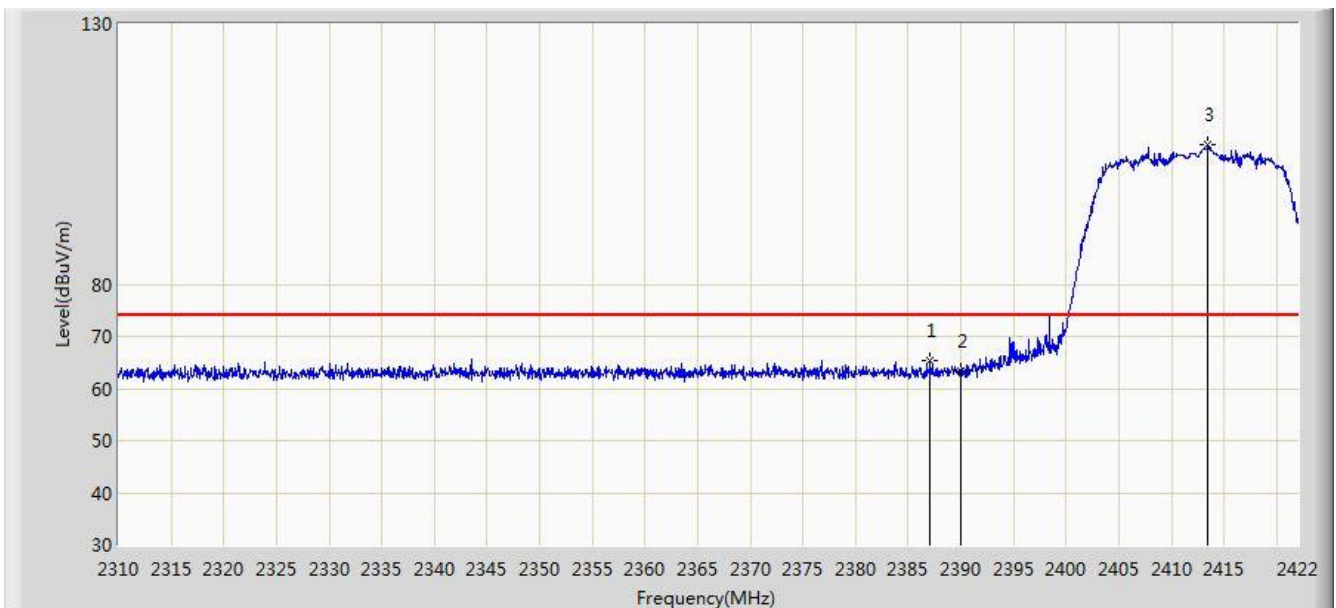


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.112	65.390	32.832	-8.610	74.000	32.559	PK
2			2390.000	63.439	30.885	-10.561	74.000	32.554	PK
3		*	2413.432	106.688	74.164	N/A	N/A	32.524	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2412MHz (Beam-Forming Mode)	

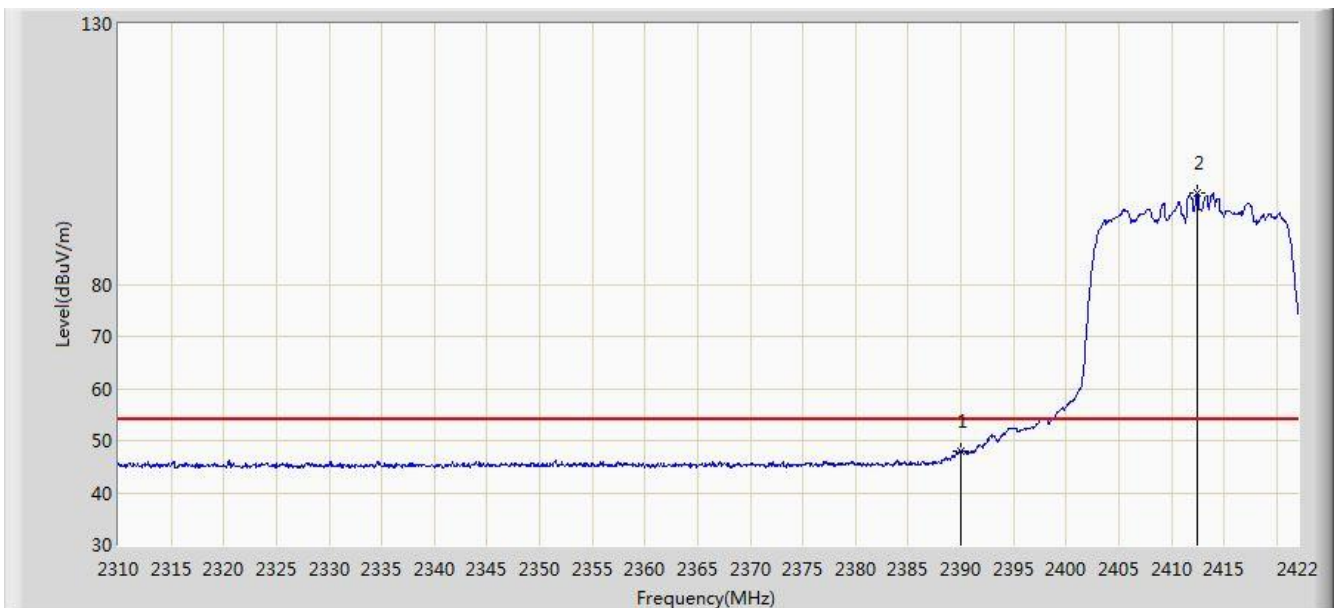


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.829	15.275	-6.171	54.000	32.554	AV
2		*	2412.480	97.642	65.117	N/A	N/A	32.525	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 15:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2412MHz (Beam-Forming Mode)	

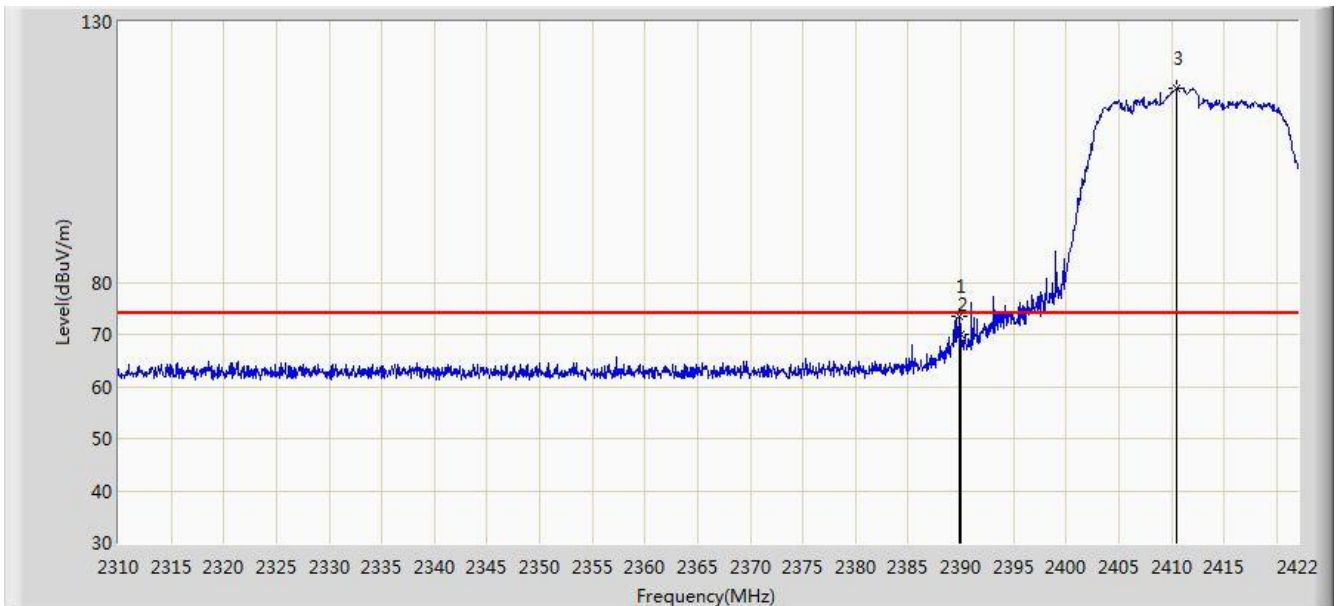


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	73.454	40.899	-0.546	74.000	32.555	PK
2			2390.000	70.004	37.450	-3.996	74.000	32.554	PK
3		*	2410.520	117.112	84.585	N/A	N/A	32.527	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 15:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2412MHz (Beam-Forming Mode)	

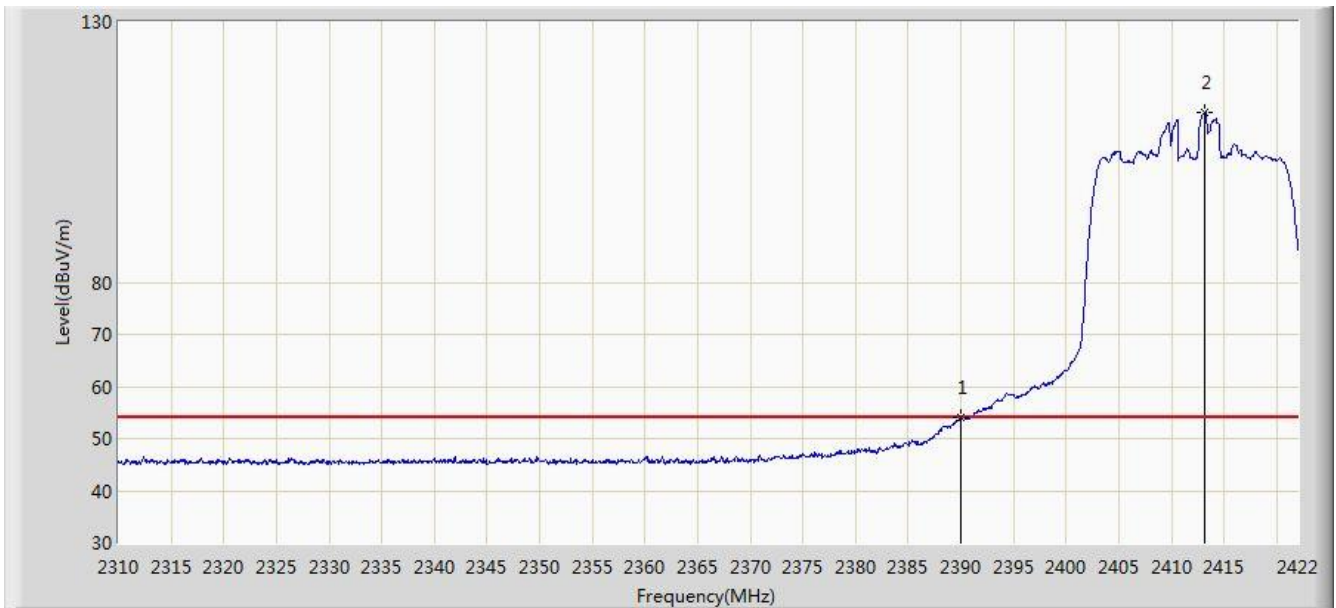


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.973	21.419	-0.027	54.000	32.554	AV
2		*	2413.096	112.518	79.994	N/A	N/A	32.524	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 16:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2437MHz (Beam-Forming Mode)	

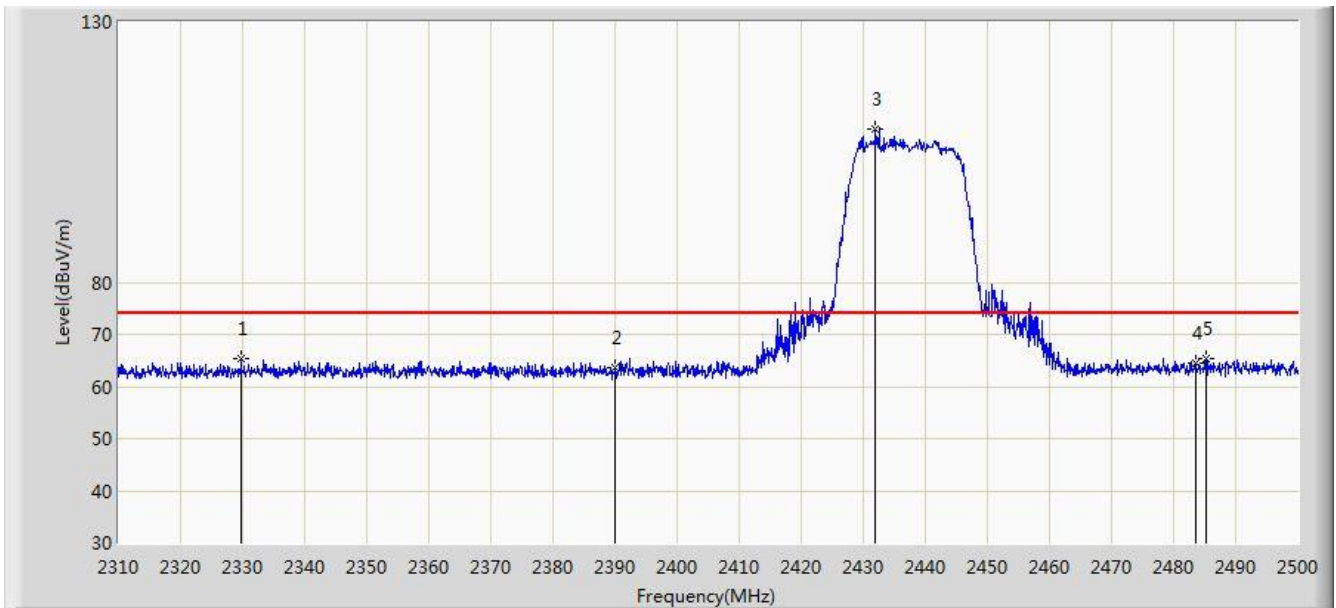


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2329.760	65.452	32.757	-8.548	74.000	32.695	PK
2			2390.000	63.595	31.041	-10.405	74.000	32.554	PK
3		*	2431.980	109.400	76.898	N/A	N/A	32.501	PK
4			2483.500	64.472	31.891	-9.528	74.000	32.580	PK
5			2485.180	65.439	32.853	-8.561	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2437MHz (Beam-Forming Mode)	

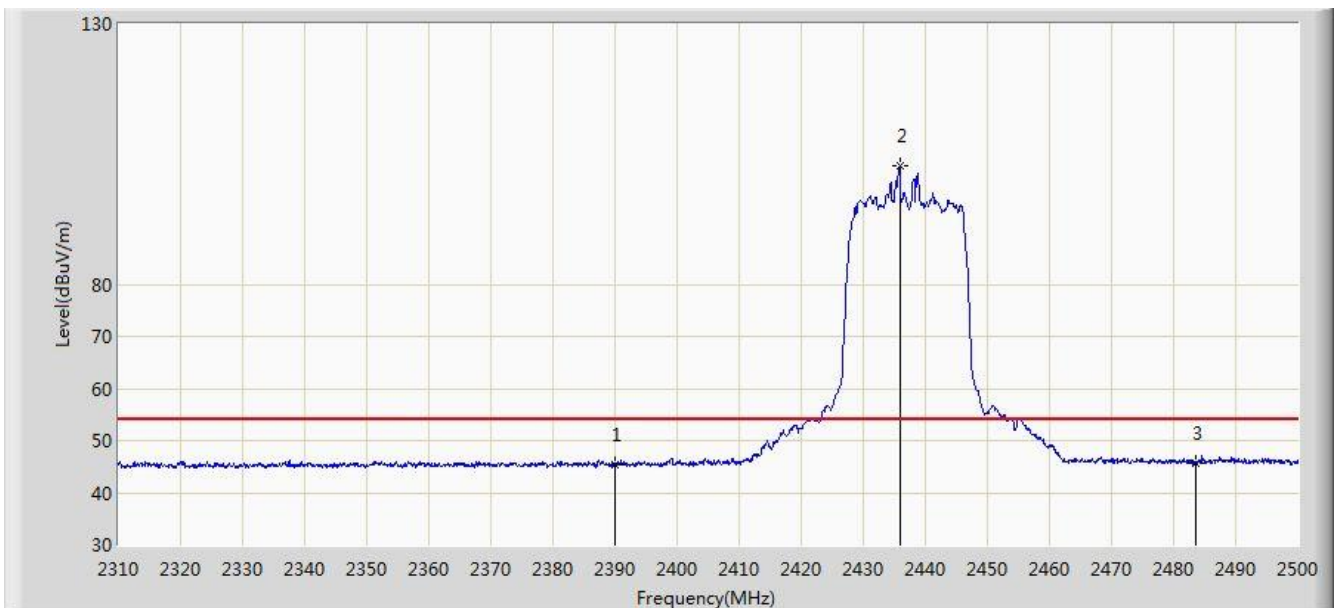


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.291	12.737	-8.709	54.000	32.554	AV
2		*	2435.970	102.646	70.149	N/A	N/A	32.497	AV
3			2483.500	45.760	13.179	-8.240	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2437MHz (Beam-Forming Mode)	

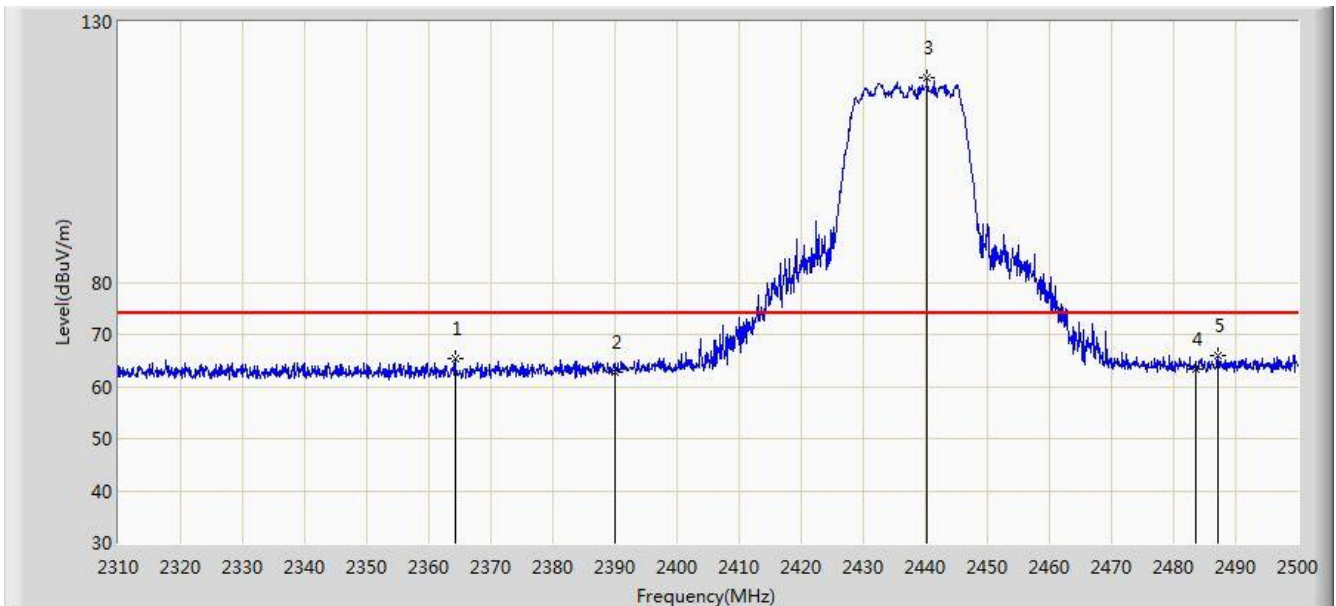


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2364.245	65.224	32.634	-8.776	74.000	32.590	PK
2			2390.000	62.753	30.199	-11.247	74.000	32.554	PK
3		*	2440.245	119.218	86.726	N/A	N/A	32.492	PK
4			2483.500	63.232	30.651	-10.768	74.000	32.580	PK
5			2487.080	65.954	33.363	-8.046	74.000	32.592	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2437MHz (Beam-Forming Mode)	

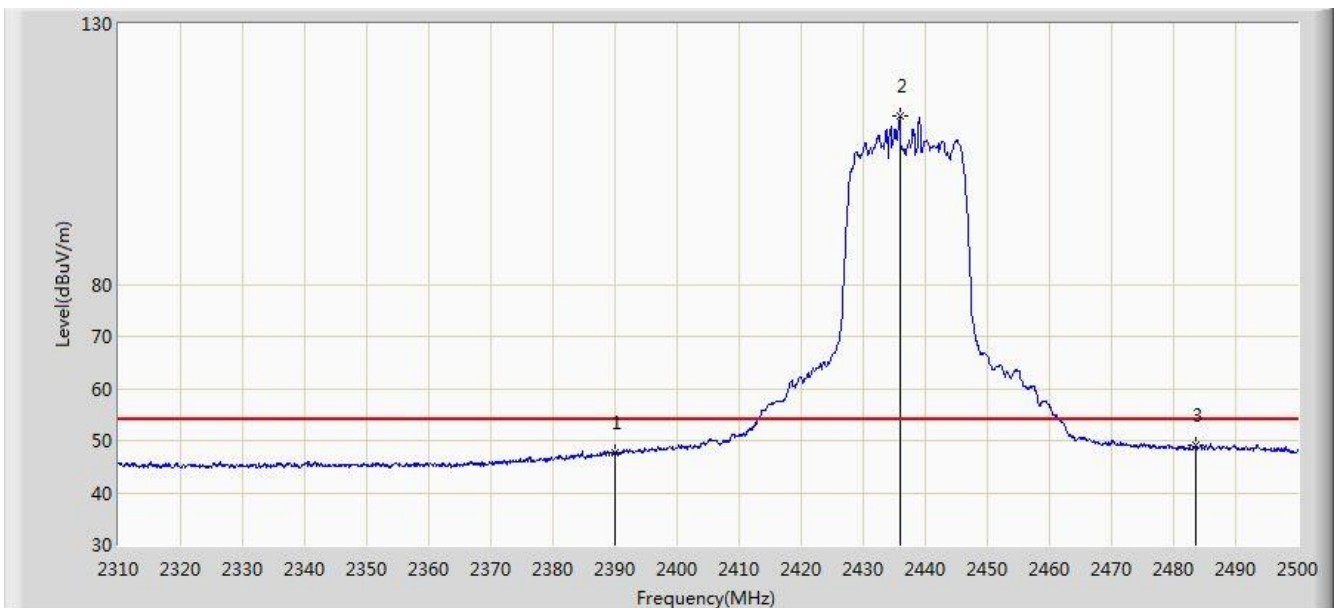


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.677	15.123	-6.323	54.000	32.554	AV
2		*	2435.970	112.452	79.955	N/A	N/A	32.497	AV
3			2483.500	48.988	16.407	-5.012	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 16:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2462MHz (Beam-Forming Mode)	

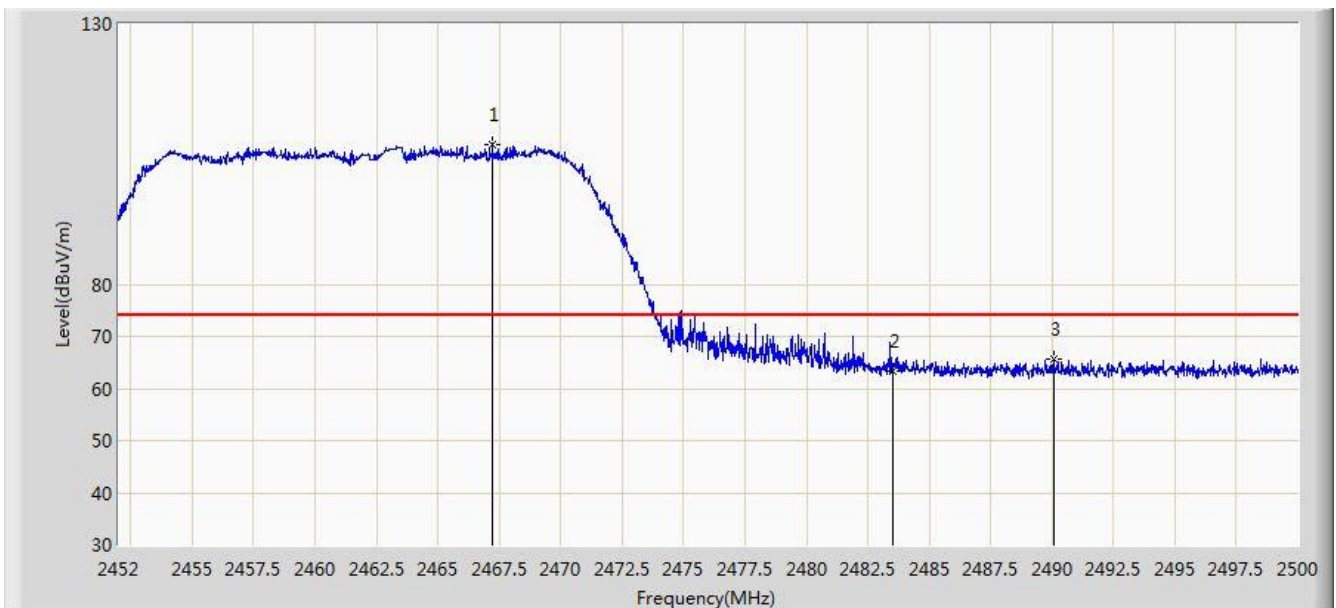


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.216	106.954	74.422	N/A	N/A	32.531	PK
2			2483.500	63.214	30.633	-10.786	74.000	32.580	PK
3			2490.064	65.702	33.102	-8.298	74.000	32.600	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 16:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2462MHz (Beam-Forming Mode)	

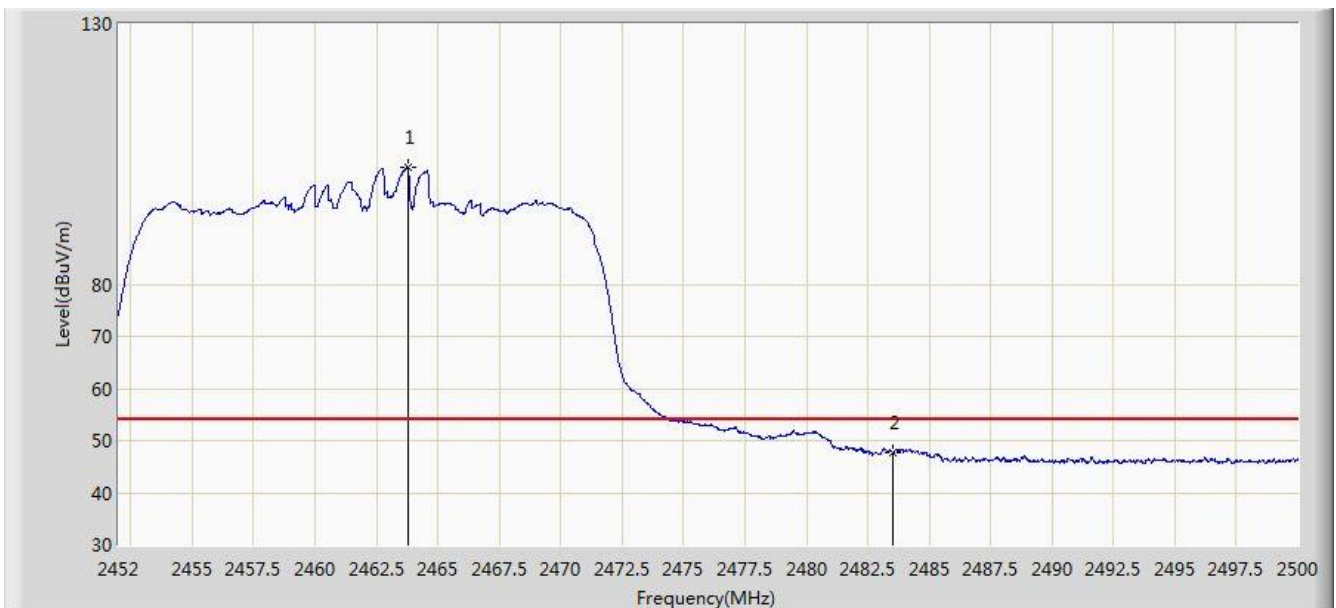


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.760	102.376	69.855	N/A	N/A	32.521	AV
2			2483.500	47.819	15.238	-6.181	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 16:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2462MHz (Beam-Forming Mode)	

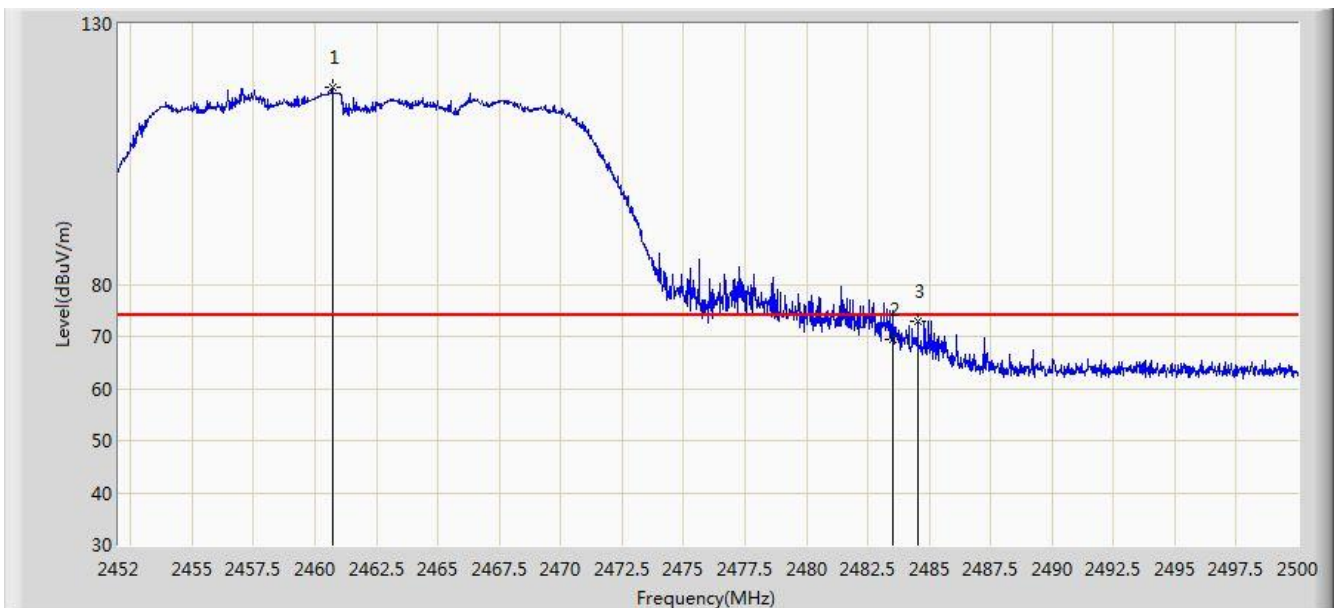

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.712	117.693	85.179	N/A	N/A	32.514	PK
2			2483.500	69.482	36.901	-4.518	74.000	32.580	PK
3			2484.544	73.017	40.433	-0.983	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 16:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 2462MHz (Beam-Forming Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.360	107.863	75.340	N/A	N/A	32.523	AV
2			2483.500	51.989	19.408	-2.011	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 17:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2422MHz (Beam-Forming Mode)	

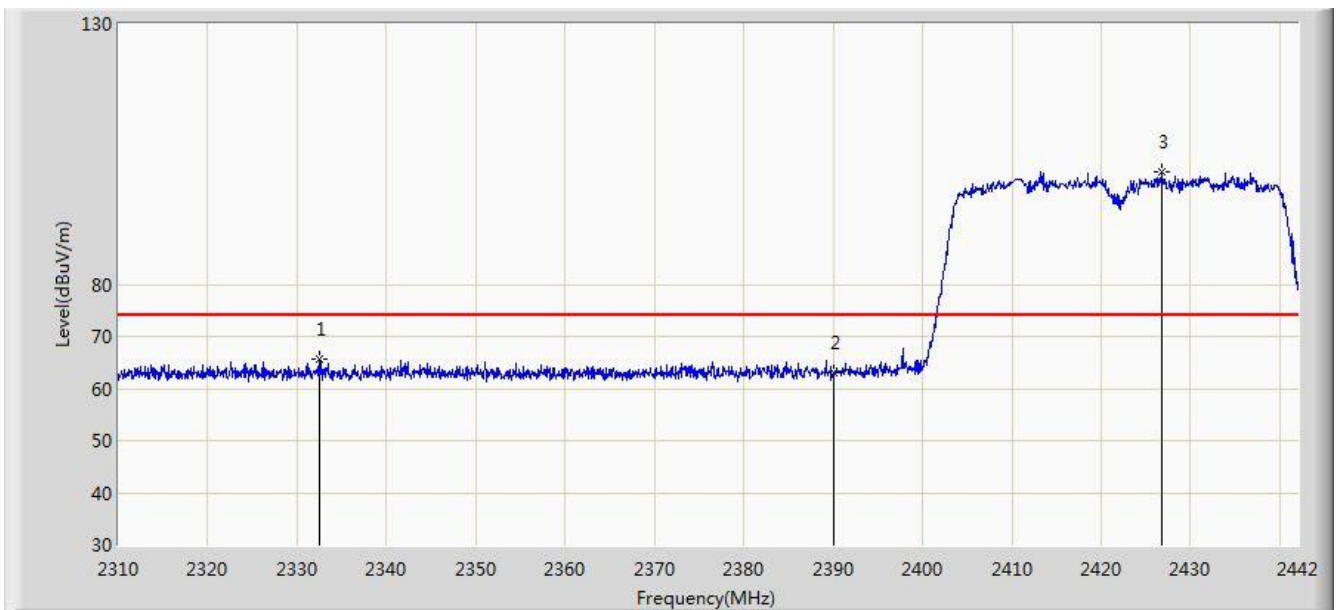


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2332.440	65.607	32.923	-8.393	74.000	32.684	PK
2			2390.000	62.968	30.414	-11.032	74.000	32.554	PK
3		*	2426.754	101.591	69.083	N/A	N/A	32.508	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 17:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2422MHz (Beam-Forming Mode)	

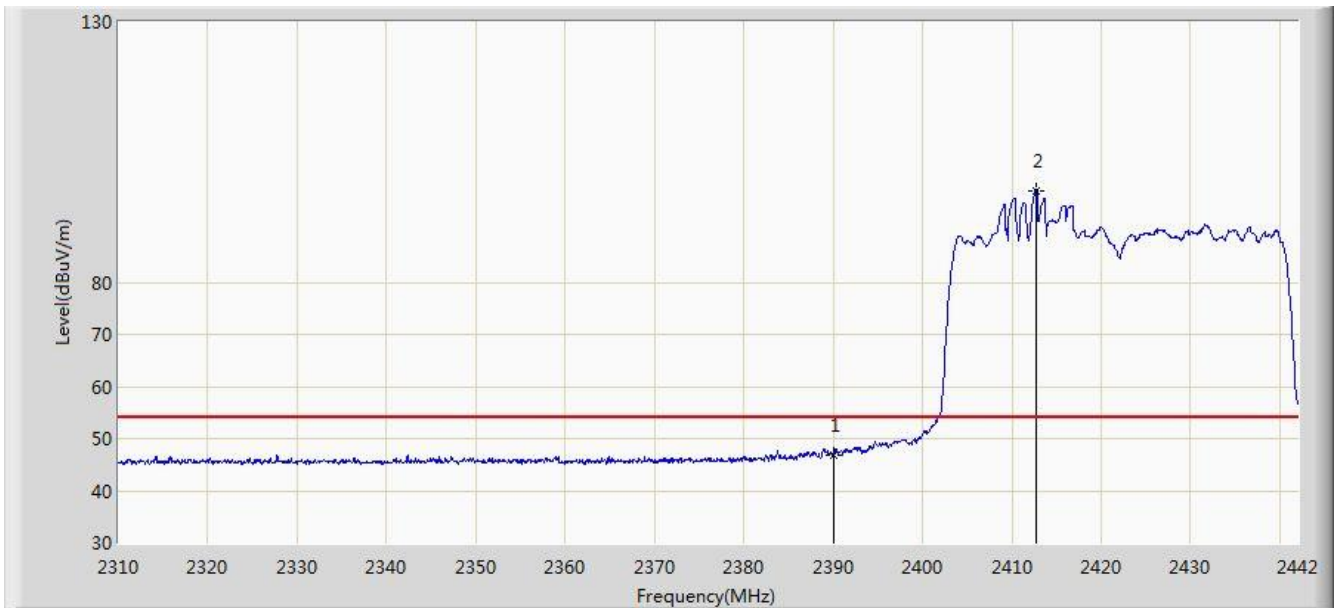


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.801	14.247	-7.199	54.000	32.554	AV
2		*	2412.696	97.631	65.106	N/A	N/A	32.525	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/02/15 - 17:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 2422MHz (Beam-Forming Mode)	

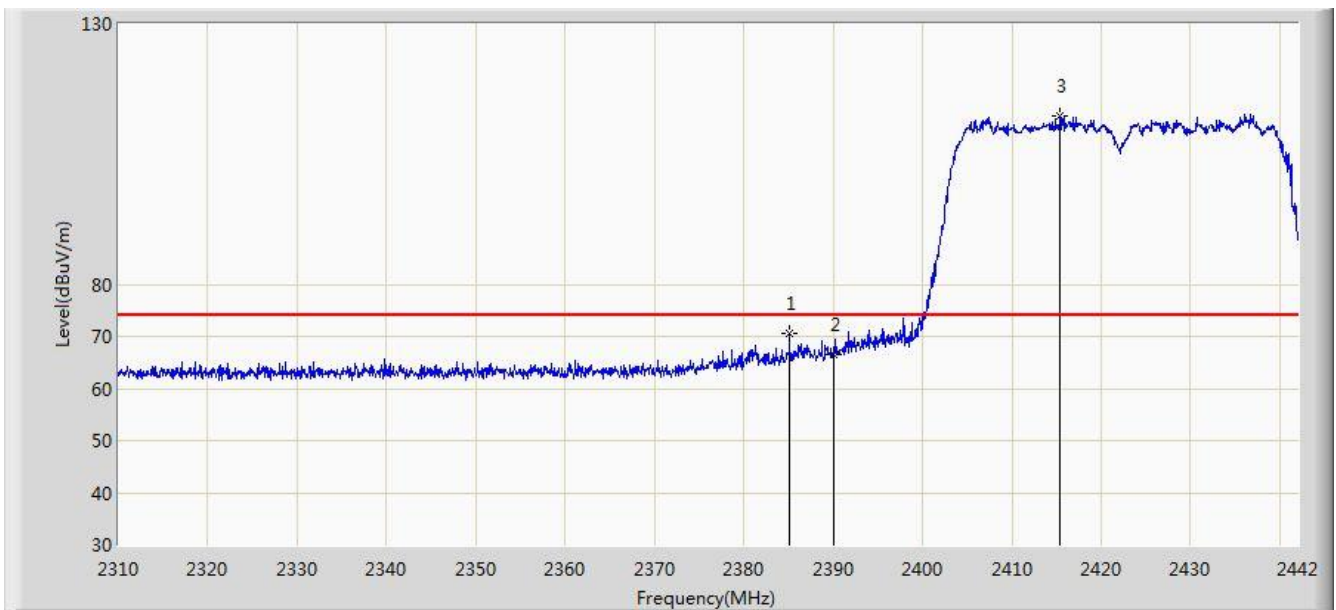

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.108	70.513	38.179	-3.487	74.000	32.334	PK
2			2390.000	66.486	34.159	-7.514	74.000	32.327	PK
3		*	2415.402	112.182	79.899	N/A	N/A	32.284	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).