



Test Report

Application No.: DNT2512250756R15302-17811
Applicant: Hangzhou Ruze E-commerce Co., Ltd
Address of Applicant: Room 801-3, building 5, information port phase 6, hangzhou, China
EUT Description: Treadmill
Model No.: BA10
Additional Model: BA09
Trade Mark: /
Standards: MIC Notice No.88 Appendix No.43
Item 19 of Article 2 Paragraph 1
Date of Receipt: 2025/12/25
Date of Test: 2025/12/26 to 2026/02/24
Date of Issue: 2026/02/25
Test Result: PASS *

Prepared By: Cathy Lin (Testing Engineer)

Reviewed By: Wayne Lin (Project Engineer)

Approved By: Yense Shen (Manager)



Note: If there is any objection to the results in this report, please submit a written inquiry to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp, and is issued by the company in accordance with the requirements of the "Conditions of Issuance of Test Reports" printed in the attached page. Unless otherwise stated, the results presented in this report only apply to the samples tested this time. Partial reproduction of this report is not allowed unless approved by the company in writing.

Dongguan DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



Report No.: DNT2512250756R15302-17811

Date: Feb 25, 2026

Page: 2 / 159

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Feb 25, 2026	Valid	Original Report



1 Test Summary

Test	Limit/Severity		Result
Antenna Requirement	Notice 88 Appendix 43, B-1 (1) & (2)		PASS
Number of Carrier	The number of the subcarriers per MHz is1 or more		PASS
Test frequency	Notice 88 Appendix 43, A-3		PASS
Frequency Error	≤ ±50 ppm		PASS
Occupied Bandwidth	OFDM: 40 MHz or less DSSS: 26 MHz or less		PASS
	Other: ≤26MHz		
Spread-spectrum Bandwidth	≥ 500 kHz (Only Spread Spectrum)		PASS
Antenna Power and Tolerance	DSSS: 20MHz systems	≤ 10mW/MHz	PASS
	OFDM: 40MHz systems	≤ 5mW/MHz	
	Tolerance:	+20%	
Spurious Emission of Tx	< 2387MHz	≤ 2.5μW/MHz	PASS
	2387 ~ 2400MHz	≤ 25μW/MHz	
	2483.5 ~ 2496.5MHz	≤ 25μW/MHz	
	>2496.5MHz	≤ 2.5μW/MHz	
Interference prevention capability	Notice 88 Appendix 43, 44, 45		PASS
Carrier Sense	Notice 88 Appendix 43, 44, 45		PASS
RF accessibility	Notice 88 Appendix 43, 44, 45		PASS
Spurious Emission of Rx	(1) Below 1 GHz: ≤ 4 nW (2) Above 1 GHz: ≤ 20 nW		PASS



Contents

1 TEST SUMMARY	3
2 GENERAL INFORMATION	5
2.1 General Description of E.U.T.	5
2.2 Description of Support Units	6
2.3 Test Location	6
2.4 Channel List	6
2.5 Test Environment and Mode	7
2.6 Power Setting of Test Software	7
2.7 Test Mode	7
2.8 Measurement Uncertainty (95% confidence levels, k=2)	8
2.9 Equipment List	8
3 TEST RESULTS	9
3.1 Radio Technical Requirements Specification	9
3.2 E.U.T. test conditions	10
3.3 Antenna Requirement	10
3.4 Carrier Sense	11
3.5 Interference prevention function	13
3.6 RF accessibility	14
3.7 Frequency Error	15
3.8 Occupied Bandwidth (99%)	16
3.9 Spread Bandwidth(90%)	17
3.10 Antenna Power	18
3.11 Spurious Emissions of Tx	19
3.12 Spurious Emissions of Rx	20
4 APPENDIX	21
Appendix A: Frequency Error	21
Appendix B: Occupied Bandwidth	34
Appendix C: Spread Bandwidth	47
Appendix D: Antenna Power	60
Appendix E: Spurious Emission of TX	62
Appendix F: Spurious Emission of RX	134



2 General Information

2.1 General Description of E.U.T.

Manufacturer:	Hangzhou Ruze E-commerce Co., Ltd		
Address of Manufacture:	Room 801-3, building 5, information port phase 6, hangzhou, China		
Product Name:	Treadmill		
Model No.:	BA10		
Additional Model:	BA09		
Trade Mark:	/		
Hardware Version:	V1.0		
Software Version:	V1.0		
Operating Frequency:	IEEE 802.11b/g/n(HT20): 2412-2472MHz; IEEE 802.11n(HT40): 2422-2462MHz		
Declared Antenna Power:	IEEE 802.11b/g/n(HT20): 10mW/MHz IEEE 802.11n(HT40): 5mW/MHz		
Type of Modulation:	IEEE 802.11b mode: DSSS IEEE 802.11g/n mode: OFDM		
Antenna Type:	☐ External, ☒ Integrated		
Antenna Gain*:	☒ Provided by client 1.05dBi		
RF Cable*:	☒ Provided by client		
	0.5dB(0.6~1GHz)	0.8dB(1.4~2GHz)	1.0dB(2.1~2.7GHz)
	1.5dB(3~4GHz)	1.8dB(4.4~6GHz)	
power supply:	Input:AC 100V/60Hz		
Note:	*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, DNT is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion. *All the models are merely different in name. The motherboards, PCB circuit boards, chips, electronic components, and appearance are all the same.		



2.2 Description of Support Units

The EUT has been tested independently.

2.3 Test Location

Company:	Dongguan DN Testing Co., Ltd
Address:	No. 1, West Fourth Street, South Xinfu Road, Wusha Liwu, Chang' an Town, Dongguan City, Guangdong P.R.China
Test engineer:	Gali Lin

Remark: Our test report is under the quality assurance system according to ISO17025.

- **FCC, USA**

Designation Number: CN1348

- **A2LA (Certificate No. 7050.01)**

DONGGUAN DN TESTING CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 7050.01.

- **Innovation, Science and Economic Development Canada**

DONGGUAN DN TESTING CO., LTD. EMC Laboratory has been recognized by ISED as an accredited testing laboratory. CAB identifier is CN0149.

IC#: 30755.

2.4 Channel List

Operation Frequency of each channel (802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz	13	2472MHz
2	2417MHz	6	2437MHz	10	2457MHz		
3	2422MHz	7	2442MHz	11	2462MHz		
4	2427MHz	8	2447MHz	12	2467MHz		
Operation Frequency of each channel (802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz	10	2457MHz		
5	2432MHz	8	2447MHz	11	2462MHz		



2.5 Test Environment and Mode

Operating Environment:	
Temperature:	20~25.0 °C
Humidity:	45~56 % RH
Atmospheric Pressure:	101.0~101.30 KPa
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

2.6 Power Setting of Test Software

Software Name	Wifi_Test_Tool_V1.9.0		
Frequency(MHz)	2412	2442	2472
IEEE 802.11b Setting	Default	Default	Default
IEEE 802.11g Setting	Default	Default	Default
IEEE 802.11n HT20 Setting	Default	Default	Default
Frequency(MHz)	2422	2442	2462
IEEE 802.11n HT40 Setting	Default	Default	Default

2.7 Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
Frequency Tolerance	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Occupied Bandwidth&Spread Bandwidth&Spreading Rate	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Spurious Emission Intensity	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Antenna Power&Antenna Power Tolerance& EIRP Power	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Secondary Radiated Emissions	Receive	-	-
Carrier Sense	IEEE 802.11n HT40	MCS0	Low/Middle/High
Interference Prevention Function	Normal Use	-	-



2.8 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Frequency Error	$\pm 1.9\%$
2	Antenna Power	$\pm 0.743\text{dB}$
3	Occupied Bandwidth	$\pm 0.0196\%$
4	Spread Bandwidth	$\pm 0.0196\%$
5	Transmitter Spurious Emission Strength and Unwanted Emission Intensity	30MHz-1GHz: $\pm 0.746\text{dB}$ 1GHz-13GHz: $\pm 1.328\text{dB}$

2.9 Equipment List

For Connect EUT Antenna Terminal Test						
Description	Manufacturer	Model	Serial Number	Cal date	Due date	correcting mechanism
Signal Generator	Keysight	N5181A-6G	MY48180415	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Signal Generator	Keysight	N5182B	MY57300617	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Power supply	Keysight	E3640A	ZB2022656	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Radio Communication Tester	R&S	CMW500	105082	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Spectrum Analyzer	Aglient	N9010A	MY52221458	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
BT/WIFI Test Software	Tonscend	JS1120 V3.1.83	NA	NA	NA	NA
RF Control Unit	Tonscend	JS0806-2	22F8060581	NA	NA	NA
Power Sensor	Anritsu	ML2495A	2129005	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Pulse Power Sensor	Anritsu	MA2411B	1911397	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
temperature and humidity box	SCOTEK	SCD-C40-80PRO	6866682020008	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Voltmetre	FLUKE	F15B PRO	59755315WS	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.

Note:

1. Calibration by the calibration agencies listed in the table correspond to paragraph 4 (ii) (c) of Article 24-2 in the Radio Law.

☐ (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act.

☐ (b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act.

☒ (c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act.

☐ (d) Calibration, etc. conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above.



3 Test Results

3.1 Radio Technical Requirements Specification

Table 1: Radio Technical Requirements Specification for 2.4 GHz band wide-band low-power data communication system (Item 19 of Article 2-1)

Items	Technical standard
Assigned frequency or designated frequency	2400-2483.5MHz
Communication method	One-way communication, simplex, semi-duplex, or duplex operation of digital signal transmission including spread spectrum
Tolerance of frequency ($\times 10^{-6}$)	$\leq \pm 50$ ppm
Tolerance of occupied bandwidth	Others: 26MHz or less
Antenna Gain	12.14dBi or less
Antenna power	(1) FH,FH+DS,FH+OFDM (using 2427MHz~2470.75MHz) : ≤ 3 mW/MHz (2) Spread spectrum system, but other than (1): ≤ 10 mW/MHz (3) OFDM, but other than (1) When occupied bandwidth ≤ 26 MHz: ≤ 10 mW/MHz When $26\text{MHz} < \text{occupied bandwidth} \leq 40\text{MHz}$: ≤ 5 mW/MHz (4) other than (1),(2),(3): ≤ 10 mW (1) DSSS& OFDM When occupied bandwidth ≤ 26 MHz: ≤ 12.14 dBm/MHz (For Omni-directional antenna) (2) OFDM When $26\text{MHz} < \text{occupied bandwidth} \leq 40\text{MHz}$: ≤ 9.13 dBm/MHz (For Omni-directional antenna)
Tolerance of spurious emission intensity	(< 2387 MHz: $2.5\mu\text{W/MHz}$ 2387 to 2400 MHz: $25\mu\text{W/MHz}$ 2483.5 through 2496.5 MHz: $25\mu\text{W/MHz}$ > 2496.5 MHz: $2.5\mu\text{W/MHz}$
Spreading bandwidth	DS, FH, FH+DS, FH+OFDM: 500kHz or more
Spreading rate of spectrum	For DS system; (Spreading bandwidth) / (Frequency corresponding to transmission rate) ≥ 5
Limit of secondary radiated emissions	(1) Below 1 GHz: 4nW (2) 1 GHz or higher: 20nW
Interference prevention function	Shall have the function of automatic transmission and reception of identification sign.
Structure	Shall be of the structure that the RF and modulator sections excluding antenna cannot easily be opened.
Note	DS: Direct spread FH: Frequency hopping OFDM: Orthogonal frequency division multiplexing



3.2 E.U.T. test conditions

Power Supply:	AC 100V		
	During the input supply voltage to the EUT from the external power source is varied by $\pm 10\%$, the fluctuation of input voltage to the circuit of RF unit of test equipment is exceed $\pm 1\%$. So, all measurement has been conducted by normal and limit voltage.		
	The measurement result of the voltage fluctuation at RF circuit when AC 100V +/- 10%.		
	DC Input		input voltage to the circuit
			Deviation
	High Voltage	110V	3.399V
	Normal Voltage	100V	3.3V
	Low Voltage	90V	3.201V
Test Frequencies:	If the EUT can be set to 3 of more different (carrier) frequencies in 1 allocated band, testing shall be performed using the Lowest, Middle and the Highest frequency (L, M and H). If there are 2 or fewer frequencies, testing shall be performed with the available frequencies.		

3.3 Antenna Requirement

Standard requirement

Applicable for equipment with an antenna terminal, including testing terminals) If an antenna connector is available, all relevant tests will be carried out conducted. If not, tests will be carried out in an anechoic room or with a suitable test-fixture.

The antenna is integrated antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.05dBi.

Result: An antenna connector is available, all relevant tests will be carried out conducted.



3.4 Carrier Sense

3.4.1 Limit


Radio equipment using OFDM method shall provide a carrier sensing function when the occupied bandwidth of its transmitting device is over 26MHz and 40Mhz or less. The equipment shall be capable to detect any regular carrier frequency with a field strength of 100mV/meter or less.

Note:

Consider 100 mV / meter for E as the starting point ,the corresponding antenna voltage for the receiver can be found by:

$$\text{Antenna Voltage (in dBm)} = 22.79 + \text{Max Antenna Gain} - 20 \times \text{Log } f \quad (f \text{ in MHz})$$

3.4.2 Test Setup

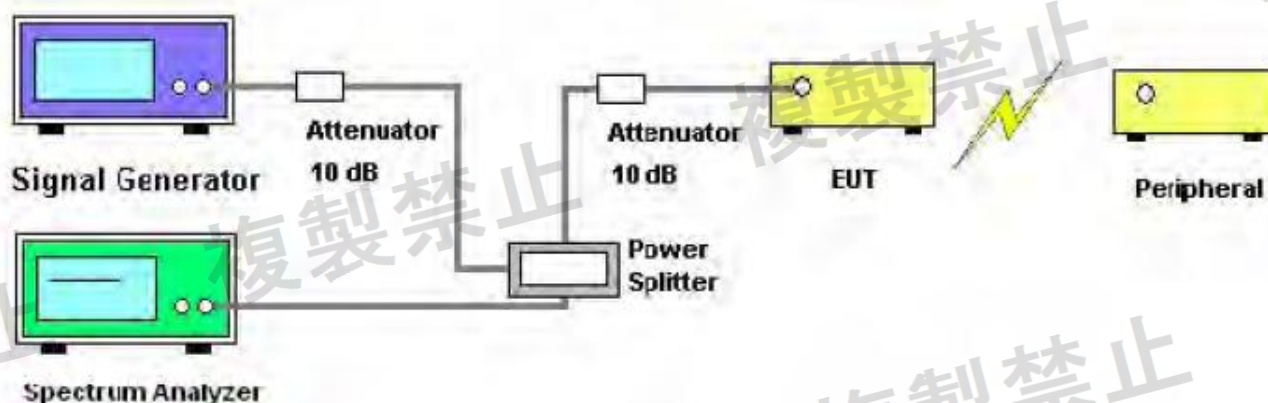

3.4.3 Spectrum Analyzer and Signal Generator Setting

Spectrum Analyzer Setting :

Spectrum Parameters	Setting
RBW	1MHz
VBW	Approximately same as the resolution bandwidth
Span	50MHz
Trigger condition	Free run
Detector	Positive peak
Trace Mode	Max Hold

Signal Generator Setting

Parameters	Setting
Center Frequency	Test frequency
Modulation	Unmodulation
Output Level	$22.79 + \text{Max Antenna Gain} - 20 \times \text{Log } f \quad (f \text{ in MHz})$

3.4.4 Test Procedure

- Connect the test equipment and EUT according to the test setup.
- Spectrum analyzer setting parameters in accordance with section 3.4.3.
- Turn off the signal generator, set the EUT to transmission state with Peripheral equipment.
- Turn on the signal generator, using spectrum analyzer to observe whether EUT does not transmit radio waves.
- Repeat above procedures until all channel were measured.
- Record the results in the test report.



3.4.5 Environment Conditions of Test Site

Temperature	24.3℃	Relative Humidity	51%
-------------	-------	-------------------	-----

3.4.6 Test Result

Test Voltage	AC 100V		
Test Mode	Test Frequency (MHz)	Interference Level (dBm)	Result
IEEE 802.11n HT40	2422	-40.86	GOOD
	2442	-41.85	GOOD
	2462	-42.11	GOOD




3.5 Interference prevention function


1) Measurement system diagram

(a) When transmitting identification code

If an identification code is transmitted



An identification code is received



2) Condition of measuring instrument

(b) Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.

3) Condition of test equipment The mode of normal use.

4) Measuring operation procedure

(a) When test equipment has the function to transmit identification code automatically:

A) Transmit the predetermined identification code from test equipment.

B) Confirm the transmitted identification code by demodulator.

49:F4:E1:9E:DC:8D

5) Test result: The unit does meet the requirements (Good).

PASS



3.6 RF accessibility

Standard requirement

Article 49-20, paragraph 1 (a)

The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.


Test Result



RF and Modulation parts are mounted on PCB with surface mount technology.




3.7 Frequency Error

Limit:	Tolerance of frequency: $\pm 50 \times 10^{-6}$
Text Method:	MIC Notice No.88 Appendix No.43
Test Status:	Test the EUT in transmitting mode without modulation.
Temperature:	23.5 °C
Humidity:	47.1 % RH
Atmospheric Pressure:	101.0kPa -101.3 kPa
Test Configuration:	 <pre>graph LR; EUT[EUT] --> SA[Spectrum Analyzer]</pre>
Test Procedure:	1. Test Conditions: Spectrum Analyzer is used for measurement. 2. EUT conditions: Modulation/Spread/Hopping OFF, CW Tx 3. Spectrum Analyzer conditions: Frequency: Test Frequency Span 1MHz RBW 10 kHz (Modulation OFF), VBW 10 kHz (Modulation OFF), Sweep Time Auto Detector mode Positive peak Indication mode Max hold

Test Result: Refer to section 4: Appendix A




3.8 Occupied Bandwidth (99%)

Limit:	OFDM: 40 MHz or less DSSS: 26 MHz or less
Text Method:	MIC Notice No.88 Appendix No.43
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Temperature:	23.5 °C
Humidity:	48.2 % RH
Atmospheric Pressure:	101.0kPa -101.3 kPa
Test Configuration:	 <pre>graph LR; EUT[EUT] --> SA[Spectrum Analyzer]</pre>
Test Procedure:	1. Test Conditions: Spectrum Analyzer is used for measurement. 2. EUT conditions: Modulation/Spread/Hopping ON For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal. 3. Spectrum Analyzer conditions: Frequency: Test Frequency Span:2-3.5 times the acceptable value RBW 300 KHz VBW 300 KHz Sweep Time Auto detector mode Sample Indication mode Max hold OBW 99%

Test Result: Refer to section 4: Appendix B



3.9 Spread Bandwidth(90%)

Limit:	≥0.5MHz
Text Method:	MIC Notice No.88 Appendix No.43
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Temperature:	23.5 °C
Humidity:	48.2 % RH
Atmospheric Pressure:	101.0kPa -101.3 kPa
Test Configuration:	 <pre>graph LR; EUT[EUT] --> SA[Spectrum Analyzer]</pre>
Test Procedure:	4. Test Conditions: Spectrum Analyzer is used for measurement. 5. EUT conditions: Modulation/Spread/Hopping ON For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal. 6. Spectrum Analyzer conditions: Frequency: Test Frequency Span:2-3.5 times the acceptable value RBW 300 KHz VBW 300 KHz Sweep Time Auto detector mode Sample Indication mode Max hold OBW 90%

Test Result: Refer to section 4: Appendix C



3.10 Antenna Power

Limit:	20MHz system:10mW/MHz or less, EIRP≤ 12.14dBm/MHz 40MHz system: 5mW/MHz or less, EIRP≤ 9.13dBm/MHz																																		
Text Method:	MIC Notice No.88 Appendix No.43																																		
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.																																		
Temperature:	23.5 °C																																		
Humidity:	51 % RH																																		
Atmospheric Pressure:	101.0kPa -101.3 kPa																																		
Test Configuration:	EUT Spectrum Analyzer																																		
Test Procedure:	Step1 : <table><tr><th>Spectrum Parameters</th><th>Setting</th></tr><tr><td>Center Frequency</td><td>Test Frequency</td></tr><tr><td>RBW</td><td>1MHz</td></tr><tr><td>VBW</td><td>About 3 times the resolution bandwidth</td></tr><tr><td>Span</td><td>Approximately twice wider than the occupied bandwidth</td></tr><tr><td>Sweep Time</td><td>Minimum amount of time to ensure measurement accuracy (in the case of burst waves, one burst per sample)</td></tr><tr><td>Trigger Conditions</td><td>Free run</td></tr><tr><td>Data Points</td><td>Over 400 points</td></tr><tr><td>Sweep Mode</td><td>Continuous sweep</td></tr><tr><td>Detector</td><td>Positive peak</td></tr><tr><td>Trace Mode</td><td>Max hold</td></tr></table> Step2 : <table><tr><th>Spectrum Parameters</th><th>Setting</th></tr><tr><td>Center Frequency</td><td>Frequencies providing maximum power density (acquired frequencies during search)</td></tr><tr><td>RBW</td><td>1MHz</td></tr><tr><td>VBW</td><td>Comparable to resolution bandwidth.</td></tr><tr><td>Span</td><td>Zero</td></tr><tr><td>Sweep Mode</td><td>Continuous sweep</td></tr></table>	Spectrum Parameters	Setting	Center Frequency	Test Frequency	RBW	1MHz	VBW	About 3 times the resolution bandwidth	Span	Approximately twice wider than the occupied bandwidth	Sweep Time	Minimum amount of time to ensure measurement accuracy (in the case of burst waves, one burst per sample)	Trigger Conditions	Free run	Data Points	Over 400 points	Sweep Mode	Continuous sweep	Detector	Positive peak	Trace Mode	Max hold	Spectrum Parameters	Setting	Center Frequency	Frequencies providing maximum power density (acquired frequencies during search)	RBW	1MHz	VBW	Comparable to resolution bandwidth.	Span	Zero	Sweep Mode	Continuous sweep
Spectrum Parameters	Setting																																		
Center Frequency	Test Frequency																																		
RBW	1MHz																																		
VBW	About 3 times the resolution bandwidth																																		
Span	Approximately twice wider than the occupied bandwidth																																		
Sweep Time	Minimum amount of time to ensure measurement accuracy (in the case of burst waves, one burst per sample)																																		
Trigger Conditions	Free run																																		
Data Points	Over 400 points																																		
Sweep Mode	Continuous sweep																																		
Detector	Positive peak																																		
Trace Mode	Max hold																																		
Spectrum Parameters	Setting																																		
Center Frequency	Frequencies providing maximum power density (acquired frequencies during search)																																		
RBW	1MHz																																		
VBW	Comparable to resolution bandwidth.																																		
Span	Zero																																		
Sweep Mode	Continuous sweep																																		

Test Result: Refer to section 4: Appendix D




3.11 Spurious Emissions of Tx

Limit:	<table><tr><td>< 2387MHz</td><td>$\leq 2.5\mu\text{W/MHz}$</td></tr><tr><td>2387 ~ 2400MHz</td><td>$\leq 25\mu\text{W/MHz}$</td></tr><tr><td>2483.5 ~ 2496.5MHz</td><td>$\leq 25\mu\text{W/MHz}$</td></tr><tr><td>>2496.5MHz</td><td>$\leq 2.5\mu\text{W/MHz}$</td></tr></table>	< 2387MHz	$\leq 2.5\mu\text{W/MHz}$	2387 ~ 2400MHz	$\leq 25\mu\text{W/MHz}$	2483.5 ~ 2496.5MHz	$\leq 25\mu\text{W/MHz}$	>2496.5MHz	$\leq 2.5\mu\text{W/MHz}$
< 2387MHz	$\leq 2.5\mu\text{W/MHz}$								
2387 ~ 2400MHz	$\leq 25\mu\text{W/MHz}$								
2483.5 ~ 2496.5MHz	$\leq 25\mu\text{W/MHz}$								
>2496.5MHz	$\leq 2.5\mu\text{W/MHz}$								
Text Method:	MIC Notice No.88 Appendix No.43								
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.								
Temperature:	23.5°C								
Humidity:	51 % RH								
Atmospheric Pressure:	101.0kPa -101.3 kPa								
Test Configuration:	 <pre>graph LR; EUT[EUT] --> SA[Spectrum Analyzer]</pre>								
Test Procedure:	- Test Conditions: Spectrum Analyzer is used for measurement. - EUT conditions: Modulation/Spread/Hopping ON For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal. - Spectrum Analyzer conditions: Step 1: All spurious are measured from 30 MHz to 13 GHz by peak mode. Step 2: IF the value measured by Step1 is 2 dB or less, measure in average mode. Test setup for Step 1: Frequency: 30MHz~2400MHz, 2483.5MHz~13GHz RBW 1 MHz VBW 1 MHz Sweep Time Auto detector mode Positive peak Indication mode Max hold Test setup for Step 2: Frequency: Spurious Frequency RBW 1 MHz VBW 1 MHz Sweep Time Auto detector mode Sample Indication mode Max hold								

Test Result: Refer to section 4: Appendix E



3.12 Spurious Emissions of Rx

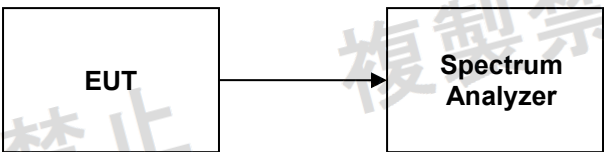Text Method:	MIC Notice No.88 Appendix No.43
Limit:	(1) Below 1 GHz: ≤ 4 nW (2) Above 1 GHz: ≤ 20 nW
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Temperature:	23.5 °C
Humidity:	56 % RH
Atmospheric Pressure:	101.0kPa -101.3 kPa
Test Configuration:	 <pre>graph LR; EUT[EUT] --> SA[Spectrum Analyzer]</pre>
Test Procedure:	- Test Conditions: Spectrum Analyzer is used for measurement. - EUT conditions: Modulation/Spread/Hopping ON For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal - Spectrum Analyzer conditions: Step 1: All spurious are measured from 30 MHz to 13 GHz by peak mode. Step 2: IF the value measured by Step1 is 2 dB or less, measure in average mode. Test setup for Step 1: Frequency: 30 MHz –13 GHz RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) Sweep Time Auto detector mode Positive peak Indication mode Max hold Test setup for Step 2: Frequency: Spurious Frequency Span 0 Hz RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) Sweep Time Auto detector mode Sample Indication mode Max hold

Test Result: Refer to section 4: Appendix F



4 Appendix


Appendix A: Frequency Error

Test Result

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result[ppm]	Limit[ppm]	Verdict
NTNV	11B	Ant1	2412	2411.997	-1.24378	±50	PASS
			2442	2441.997	-1.22850	±50	PASS
			2472	2471.997	-1.21359	±50	PASS
	11G	Ant1	2412	2411.996	-1.65838	±50	PASS
			2442	2441.996	-1.63800	±50	PASS
			2472	2471.996	-1.61812	±50	PASS
	11N20SISO	Ant1	2412	2411.996	-1.65838	±50	PASS
			2442	2441.996	-1.63800	±50	PASS
			2472	2471.996	-1.61812	±50	PASS
	11N40SISO	Ant1	2422	2421.996	-1.65153	±50	PASS
			2442	2441.996	-1.63800	±50	PASS
			2462	2461.996	-1.62470	±50	PASS
NTLV	11B	Ant1	2412	2411.998	-0.82919	±50	PASS
			2442	2441.997	-1.22850	±50	PASS
			2472	2471.997	-1.21359	±50	PASS
	11G	Ant1	2412	2411.997	-1.24378	±50	PASS
			2442	2441.997	-1.22850	±50	PASS
			2472	2471.997	-1.21359	±50	PASS
	11N20SISO	Ant1	2412	2411.997	-1.24378	±50	PASS
			2442	2441.996	-1.63800	±50	PASS
			2472	2471.996	-1.61812	±50	PASS
	11N40SISO	Ant1	2422	2421.996	-1.65153	±50	PASS
			2442	2441.997	-1.22850	±50	PASS
			2462	2461.997	-1.21852	±50	PASS
NTHV	11B	Ant1	2412	2411.998	-0.82919	±50	PASS
			2442	2441.997	-1.22850	±50	PASS
			2472	2471.997	-1.21359	±50	PASS
	11G	Ant1	2412	2411.997	-1.24378	±50	PASS
			2442	2441.997	-1.22850	±50	PASS
			2472	2471.997	-1.21359	±50	PASS
	11N20SISO	Ant1	2412	2411.997	-1.24378	±50	PASS
			2442	2441.997	-1.22850	±50	PASS
			2472	2471.997	-1.21359	±50	PASS
	11N40SISO	Ant1	2422	2421.996	-1.65153	±50	PASS
			2442	2441.997	-1.22850	±50	PASS
			2462	2461.997	-1.21852	±50	PASS




Test Graphs

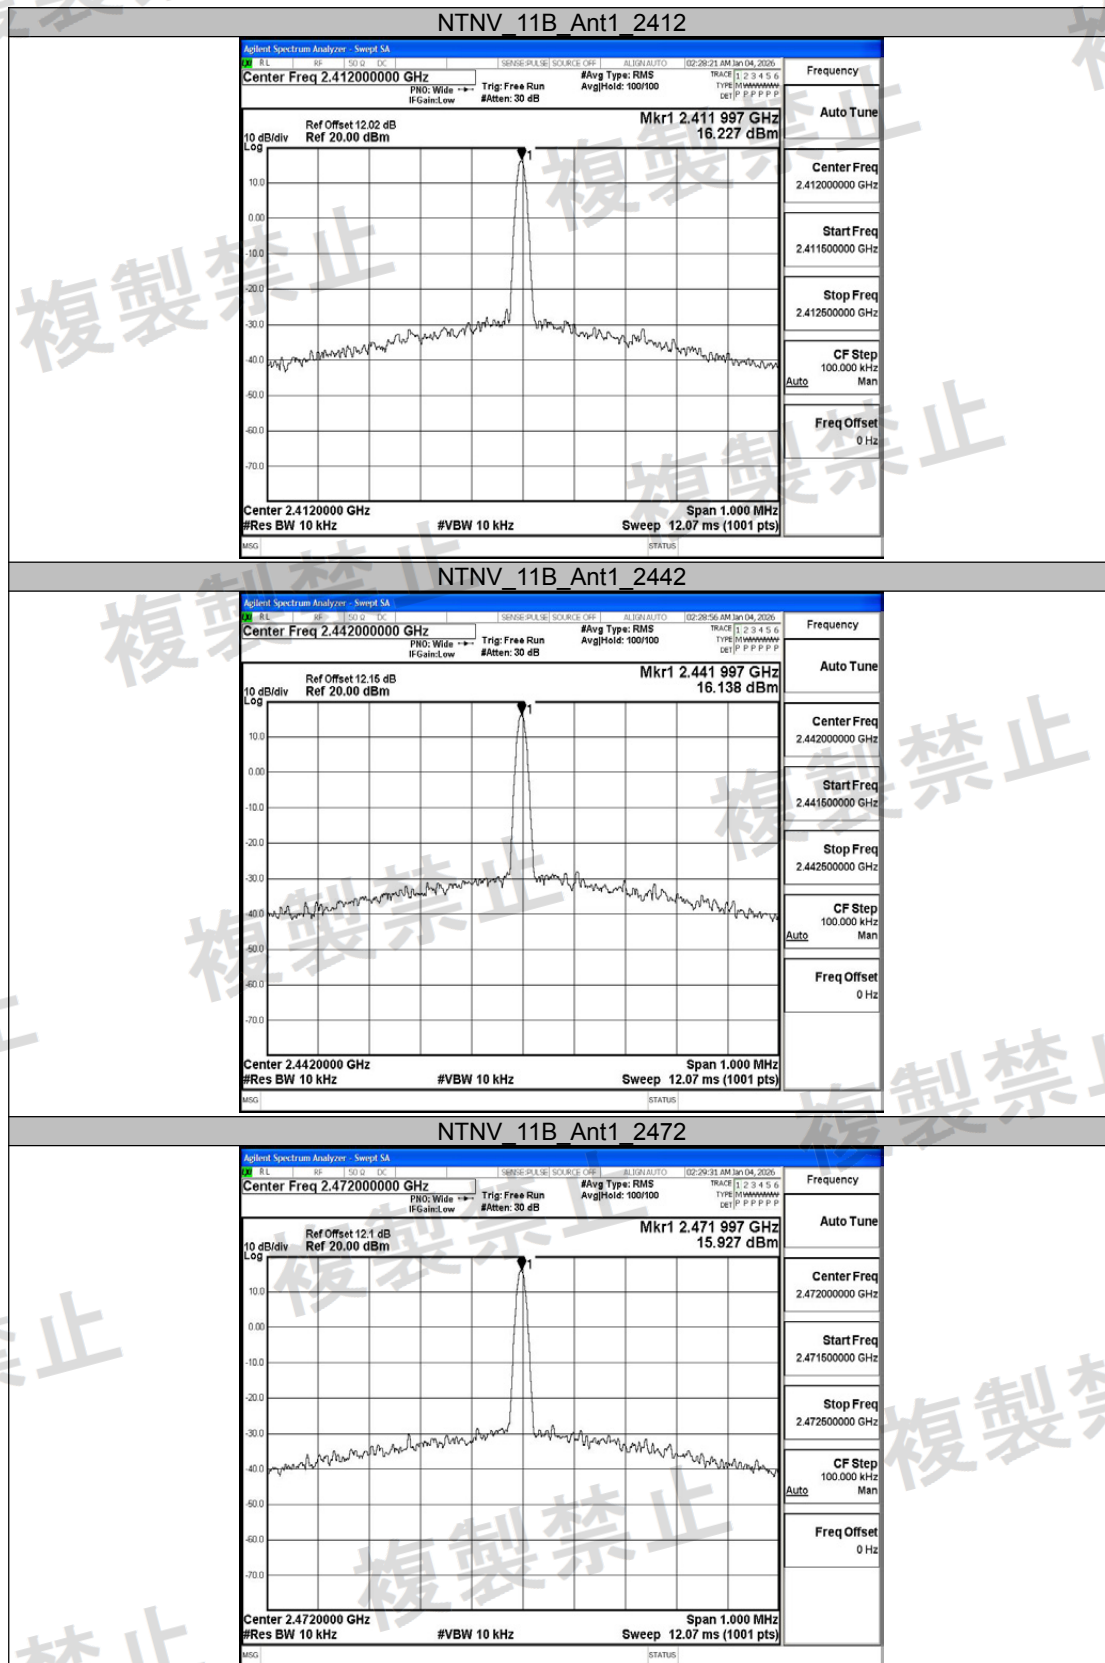





NTNV 11G_Ant1_2412

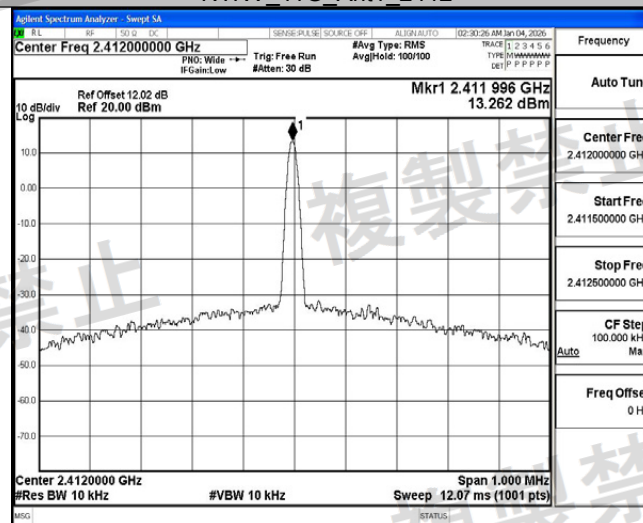

NTNV 11G_Ant1_2442

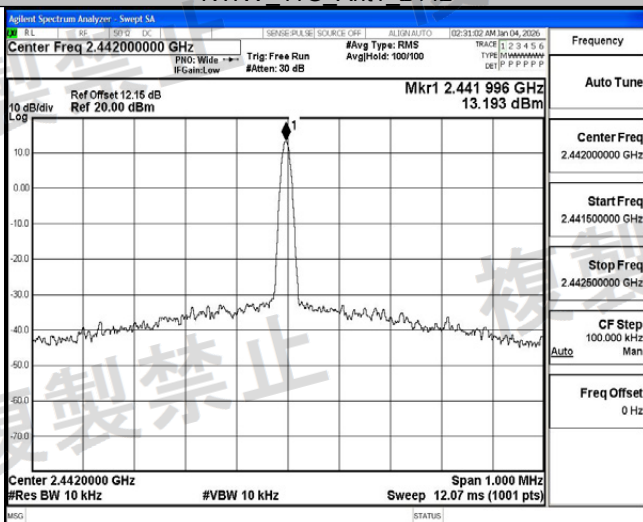


NTNV 11G_Ant1_2472

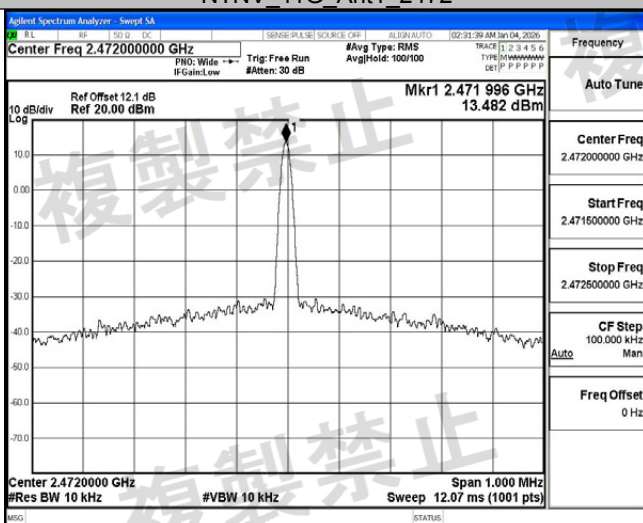





NTNV_11N20SISO_Ant1_2412



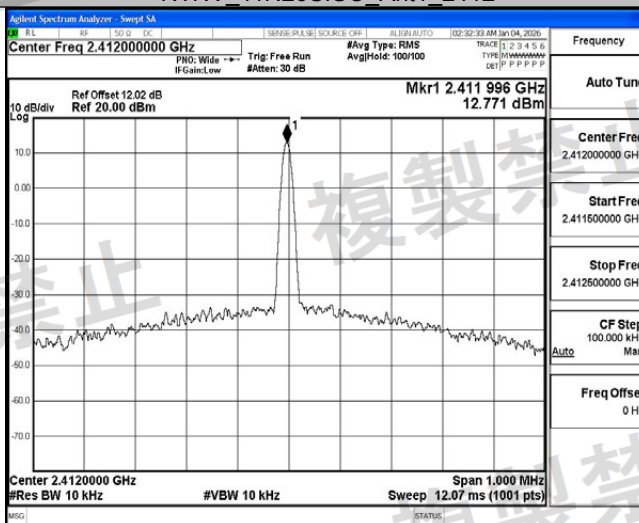


NTNV_11N20SISO_Ant1_2442

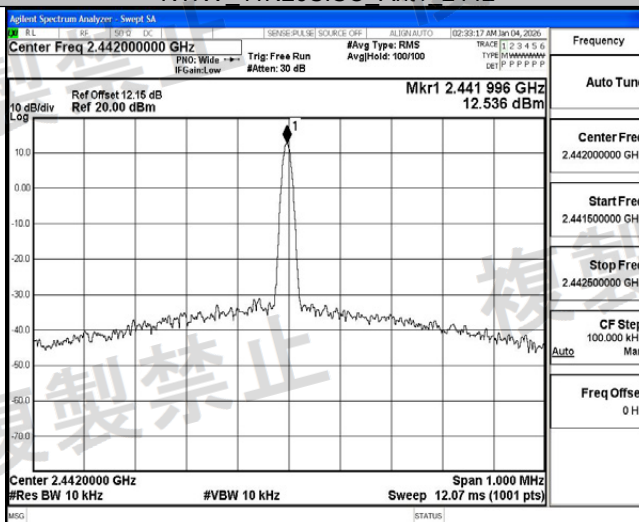


NTNV_11N20SISO_Ant1_2472

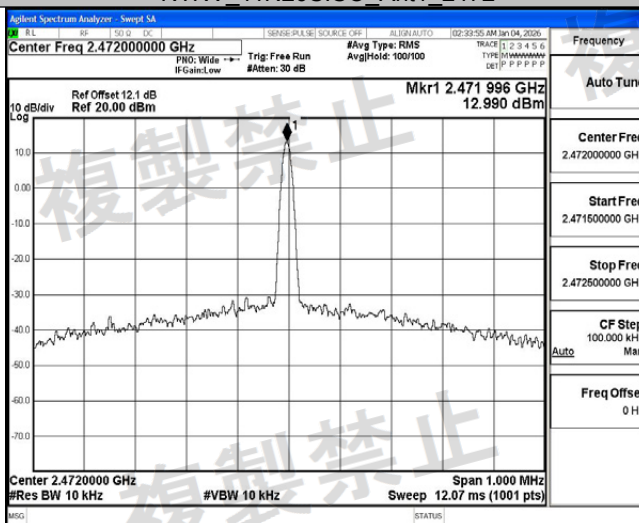

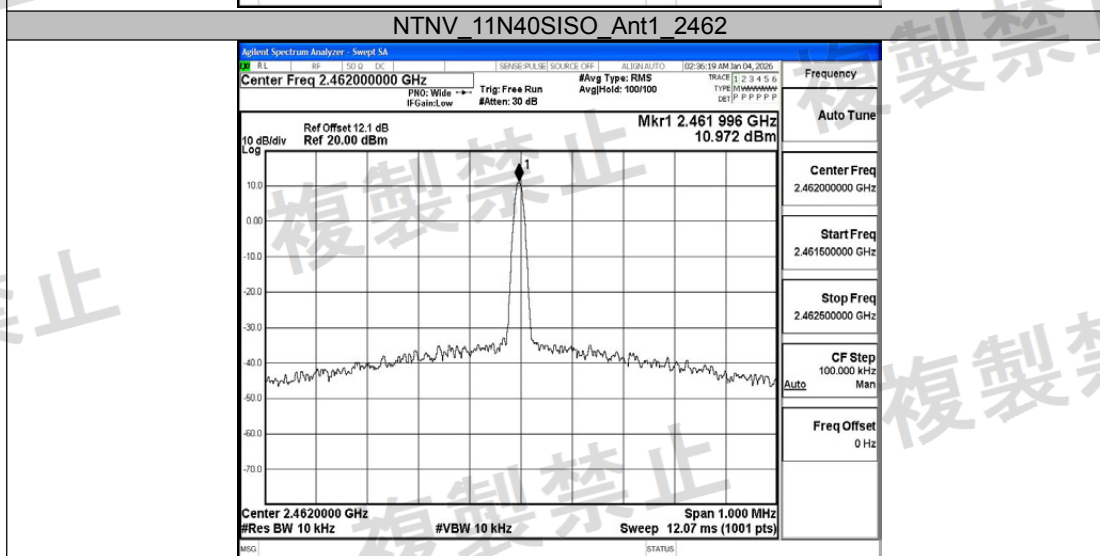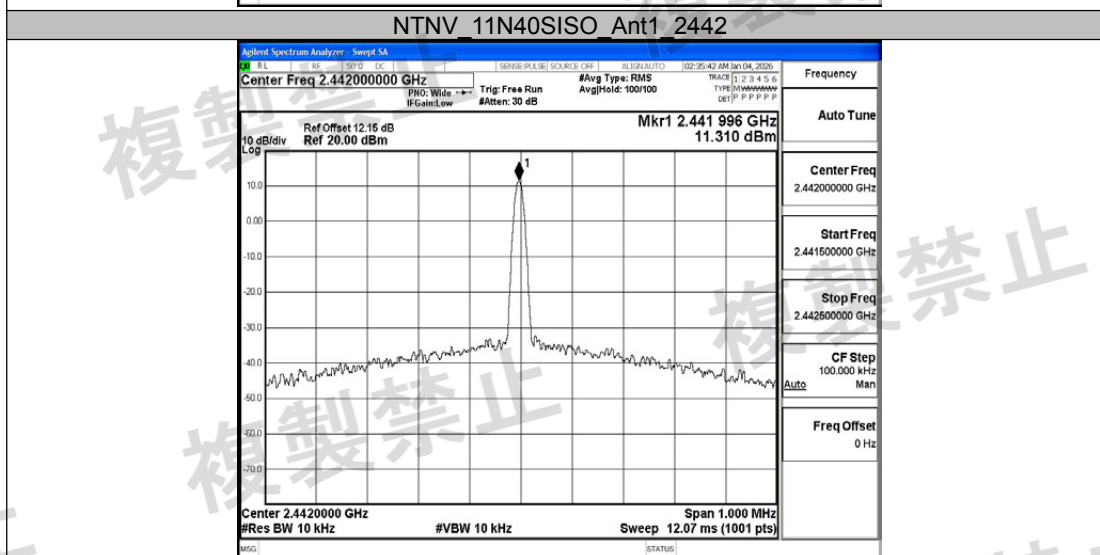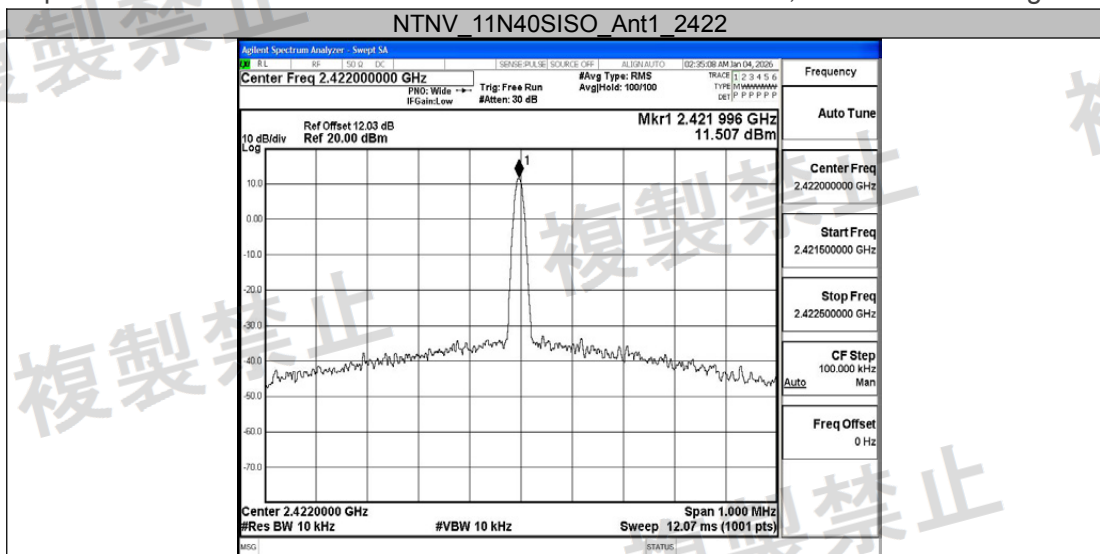





NTLV_11B_Ant1_2412

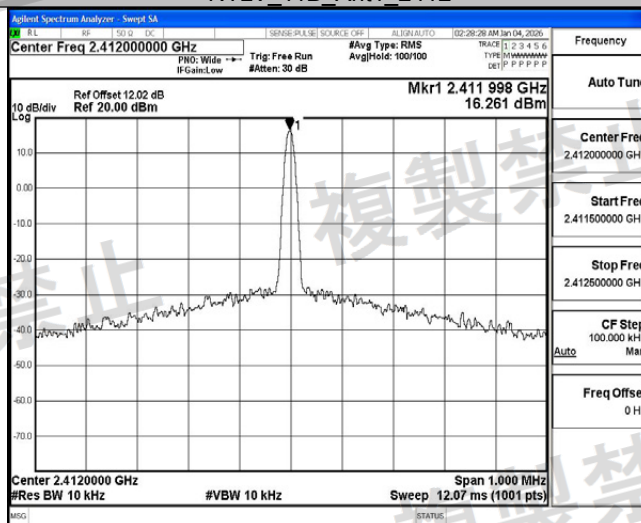

NTLV_11B_Ant1_2442

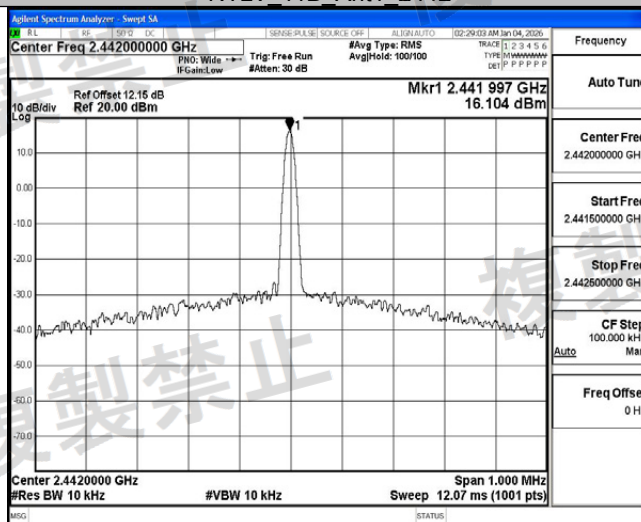


NTLV_11B_Ant1_2472

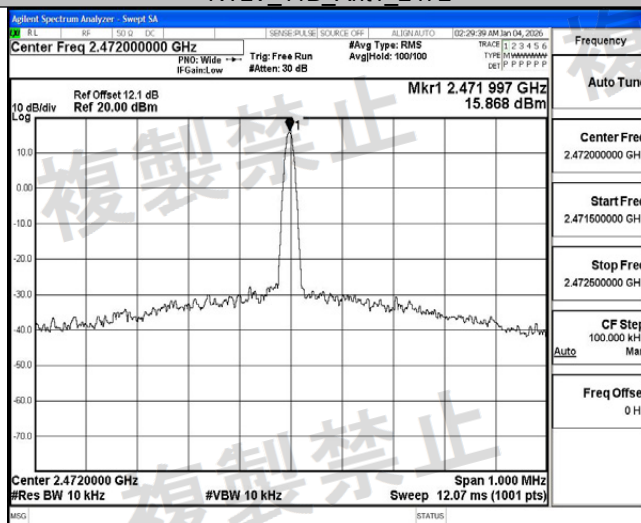





NTLV 11G Ant1 2412



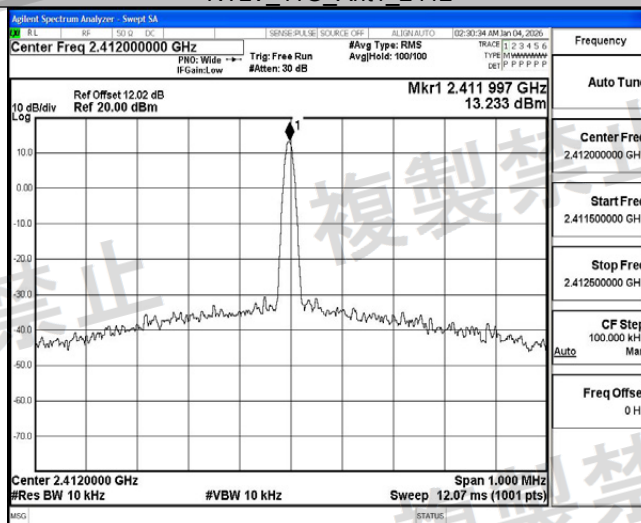





NTLV 11G Ant1 2442

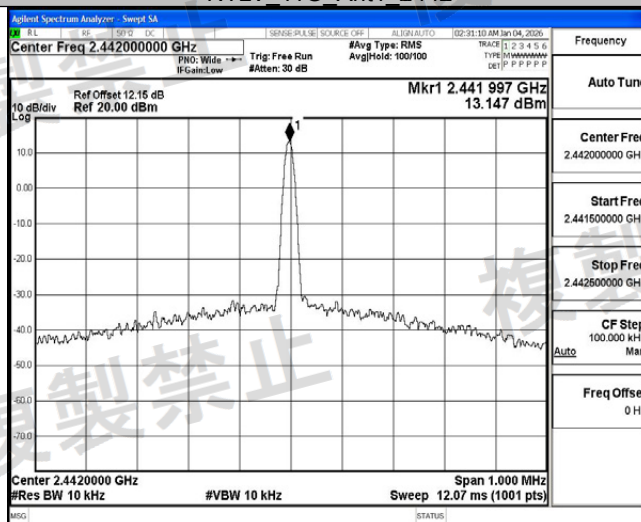

NTLV 11G Ant1 2472

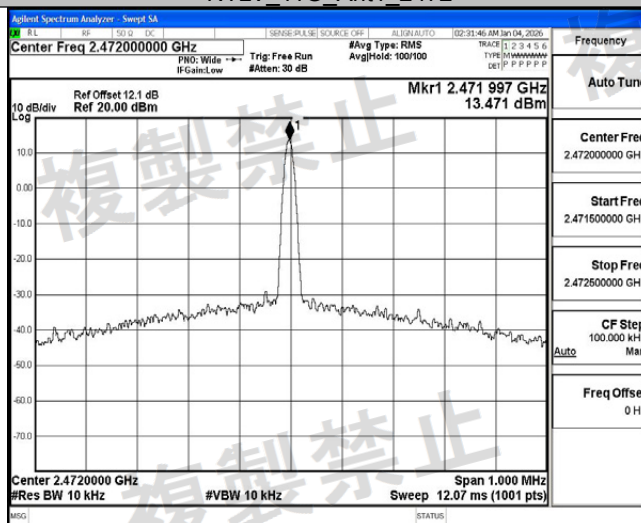


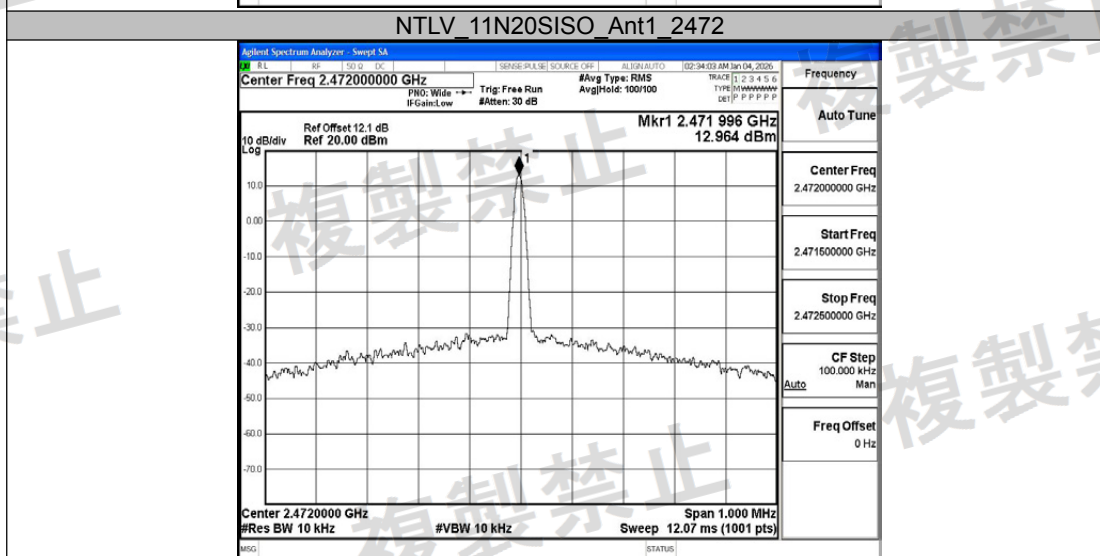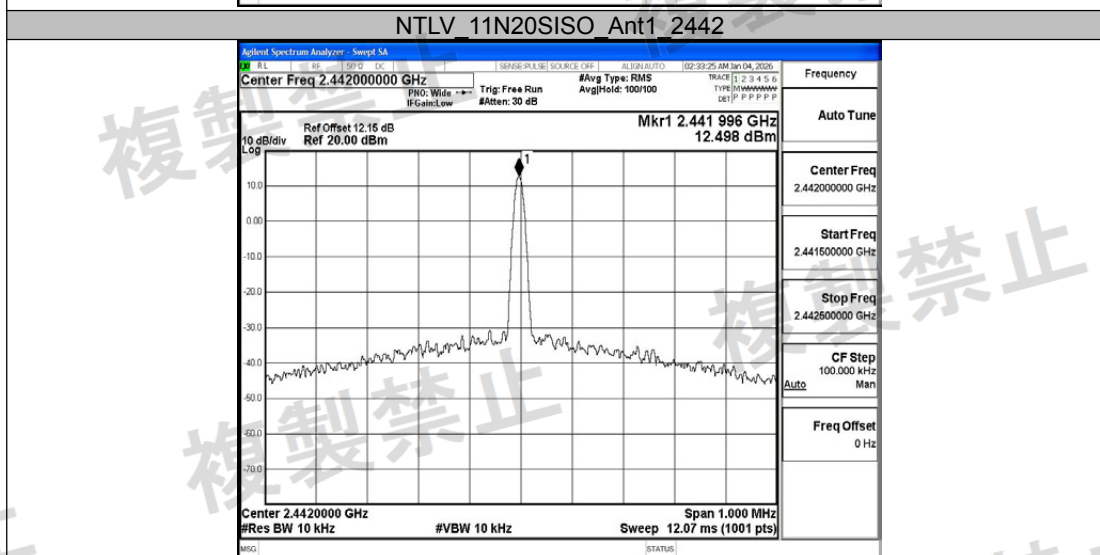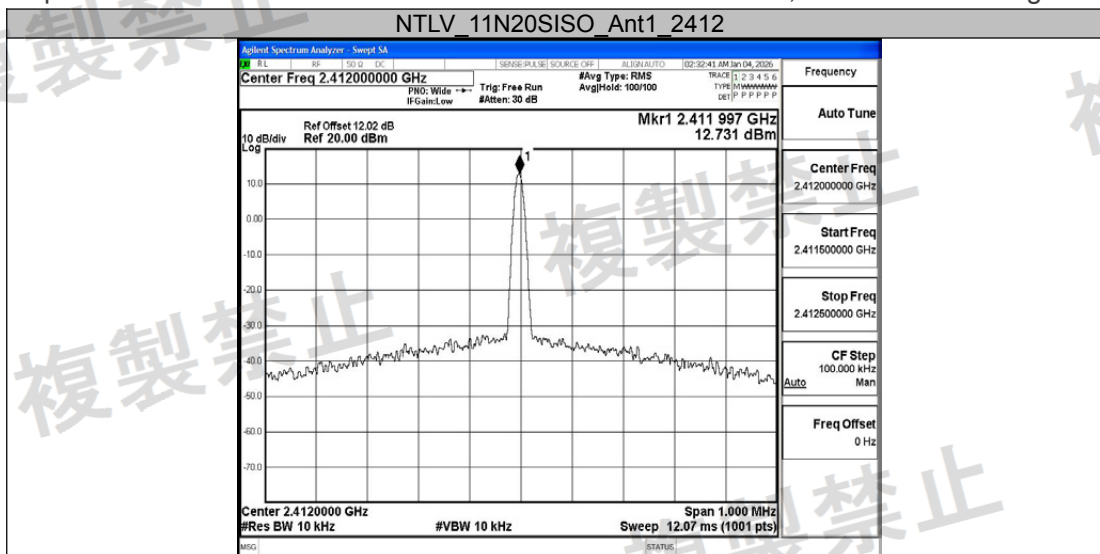

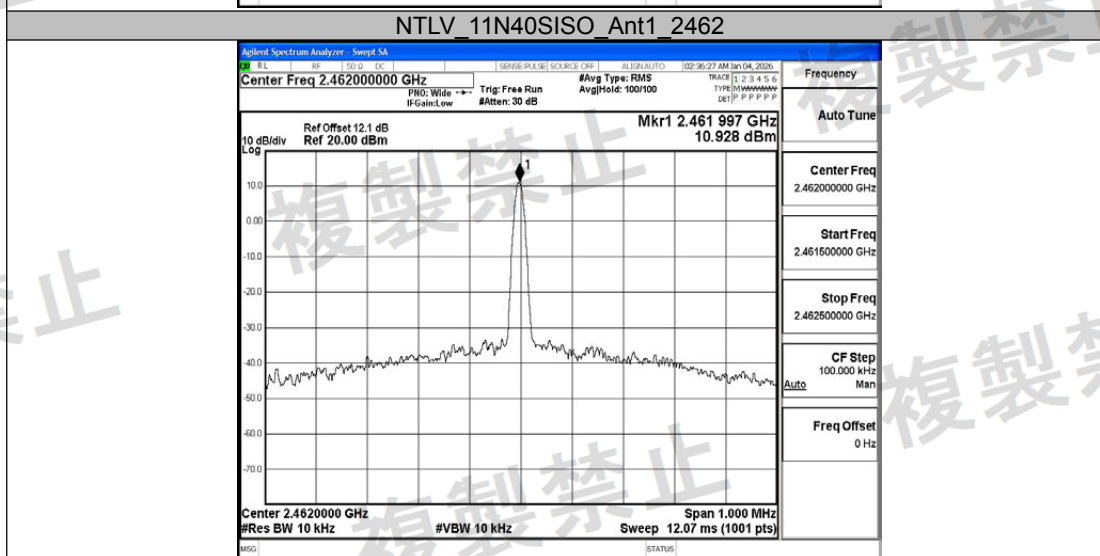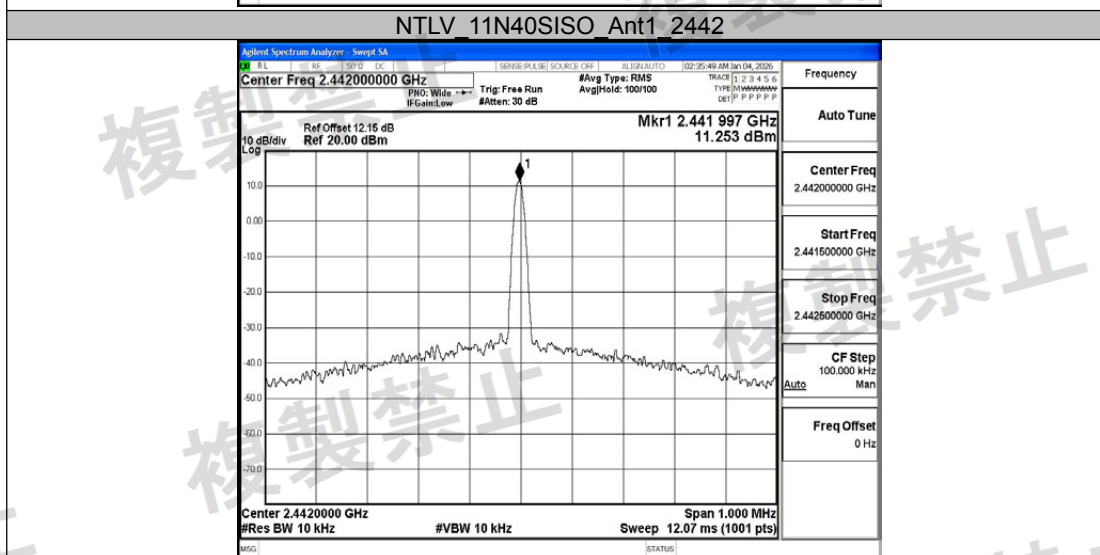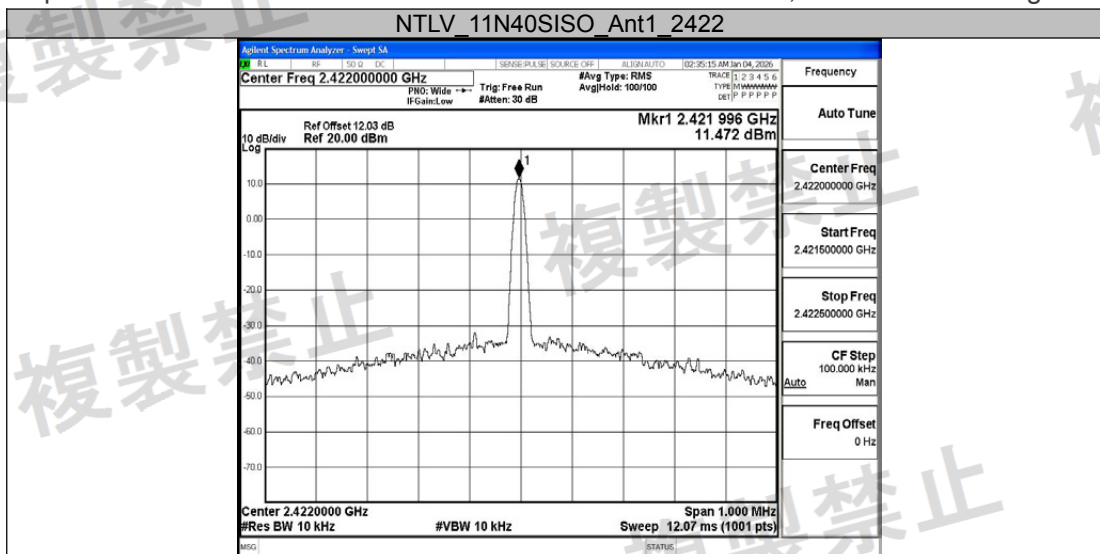





NTHV_11B_Ant1_2412



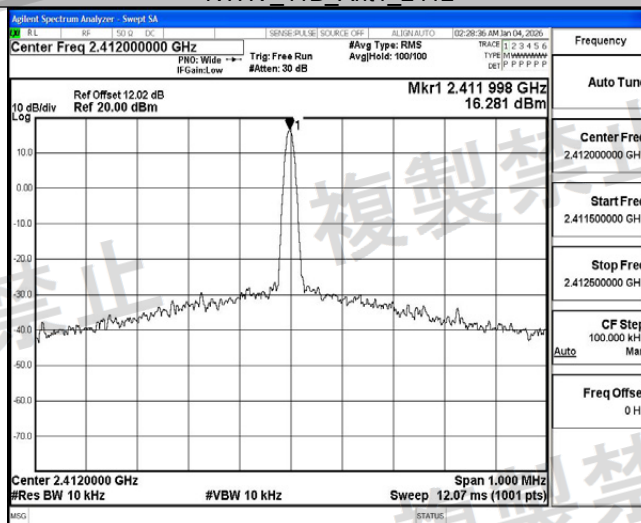


NTHV_11B_Ant1_2442

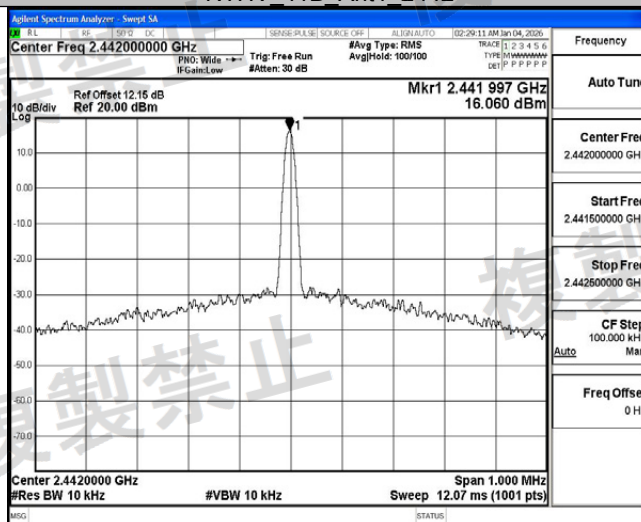


NTHV_11B_Ant1_2472

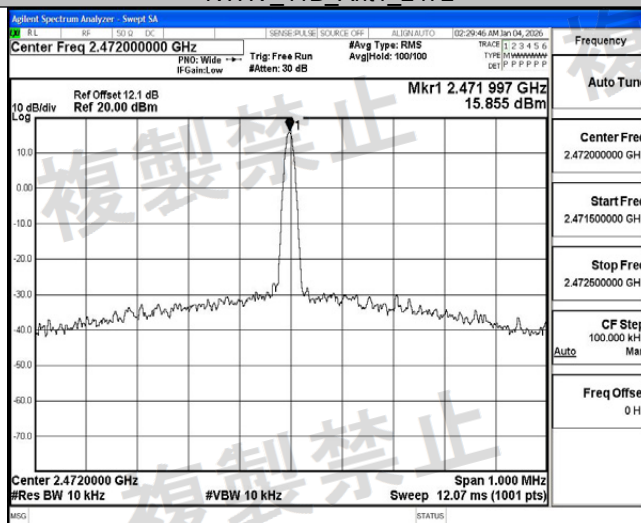

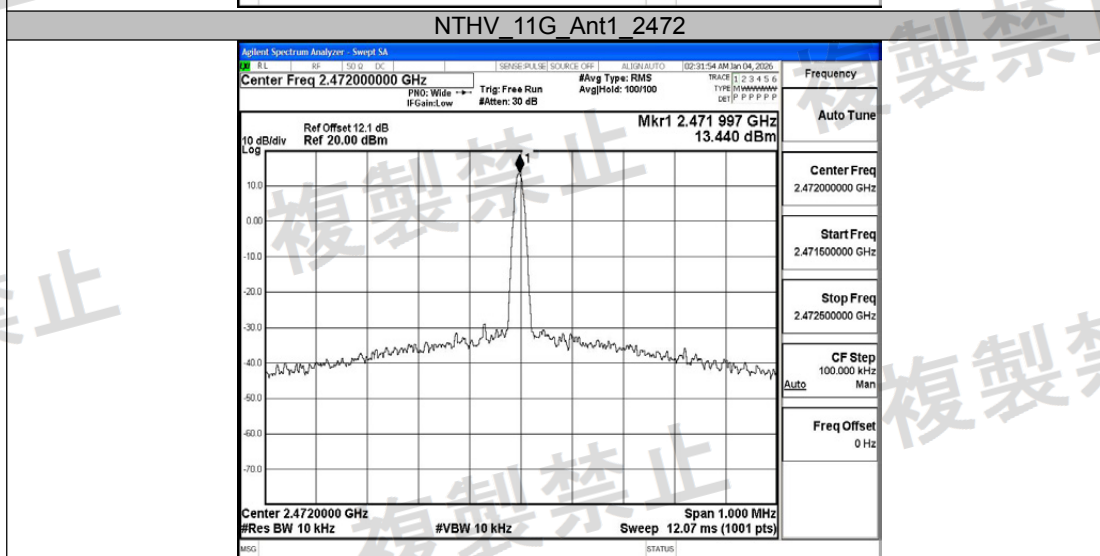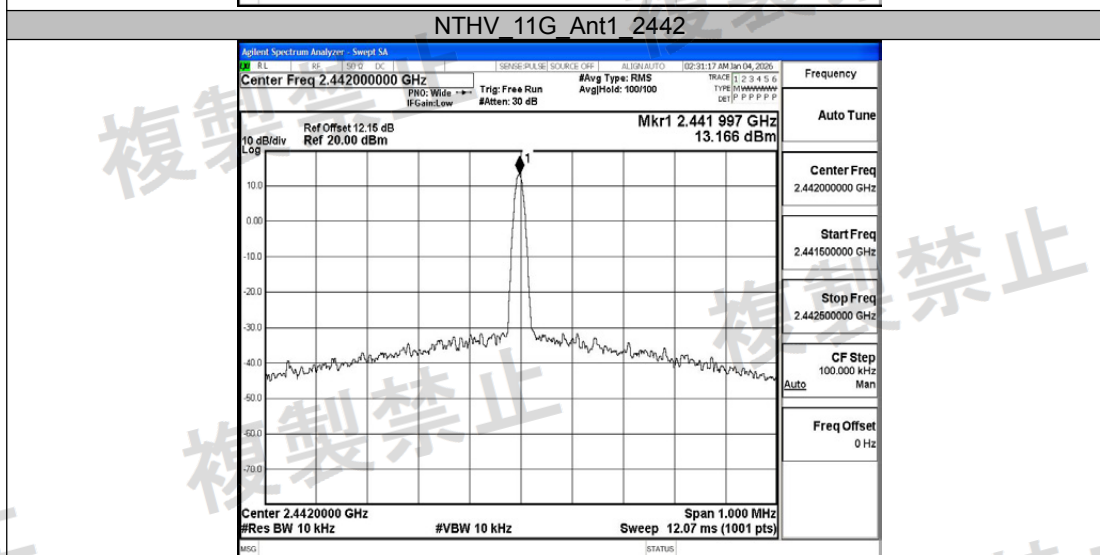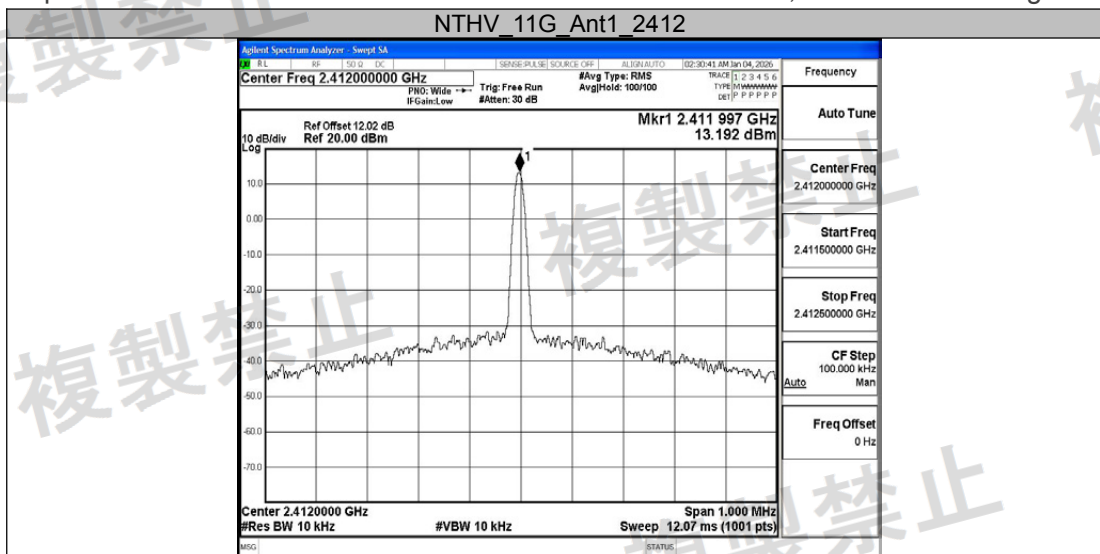





NTHV_11N20SISO Ant1_2412



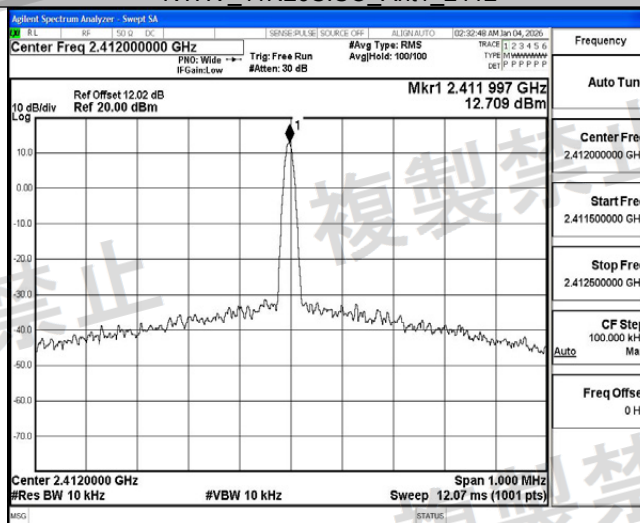


NTHV_11N20SISO Ant1_2442

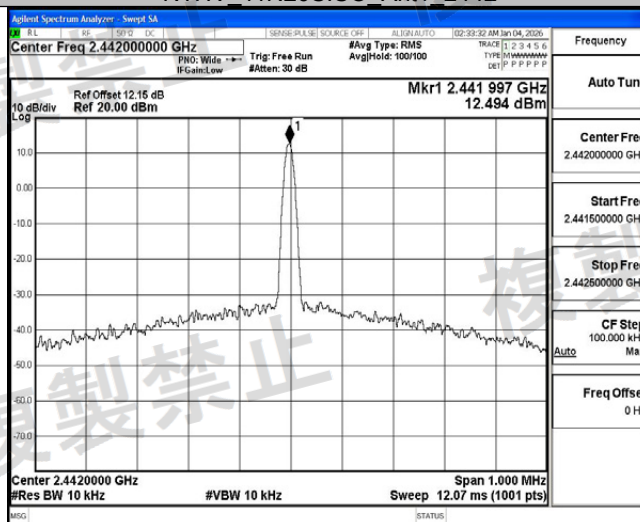

NTHV_11N20SISO Ant1_2472

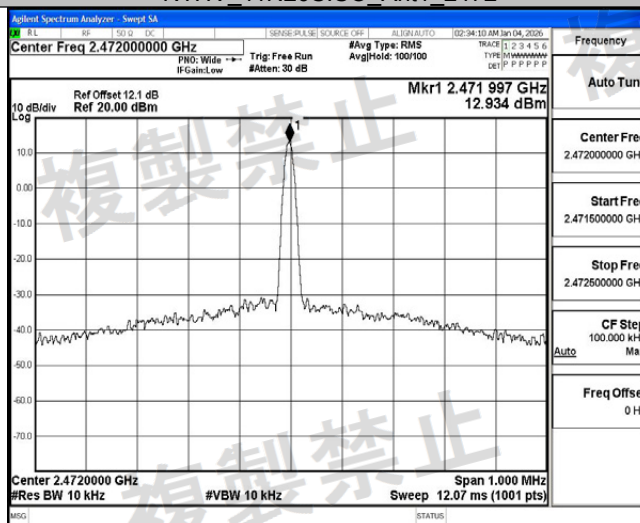

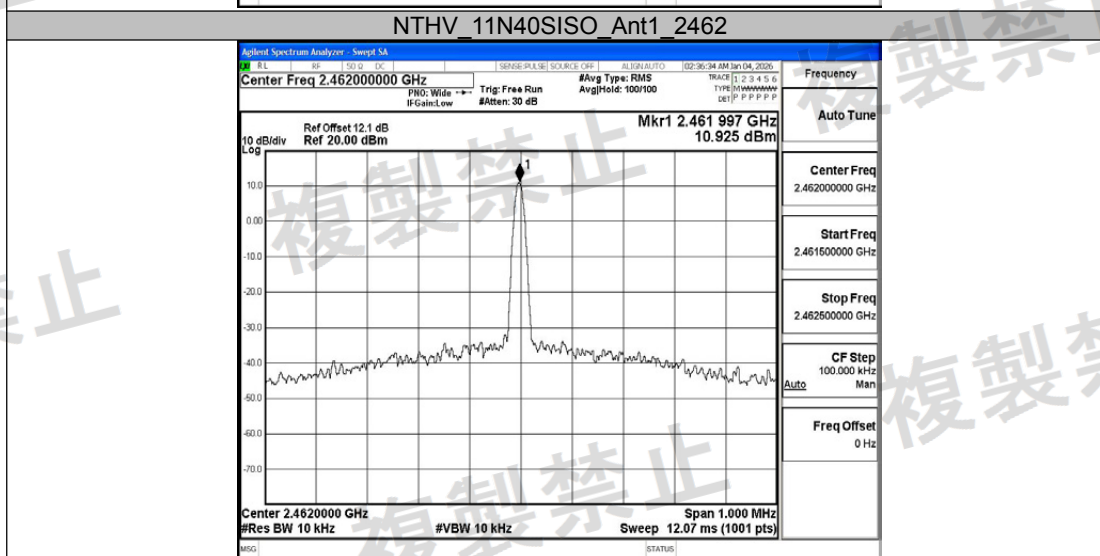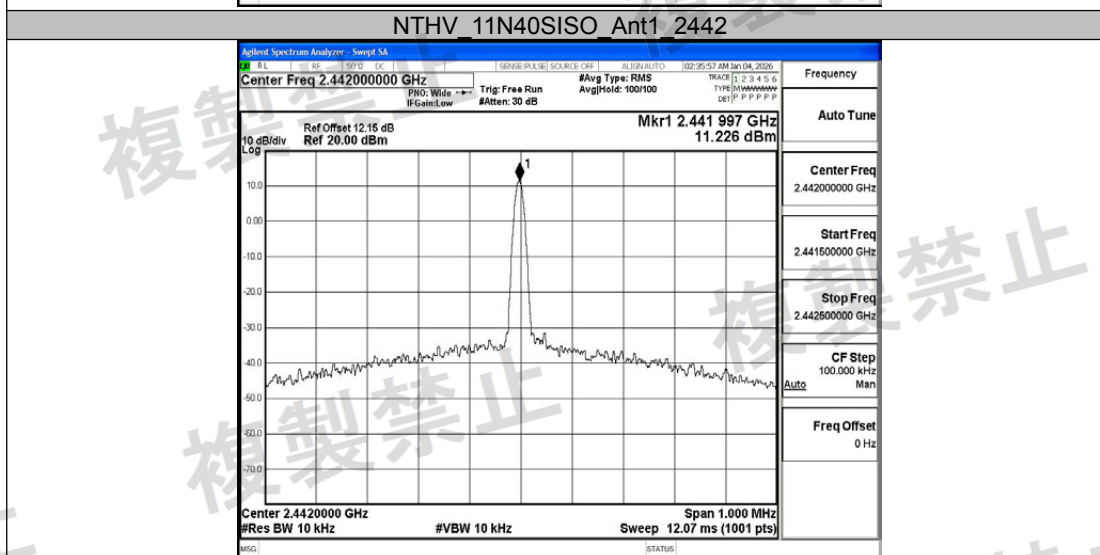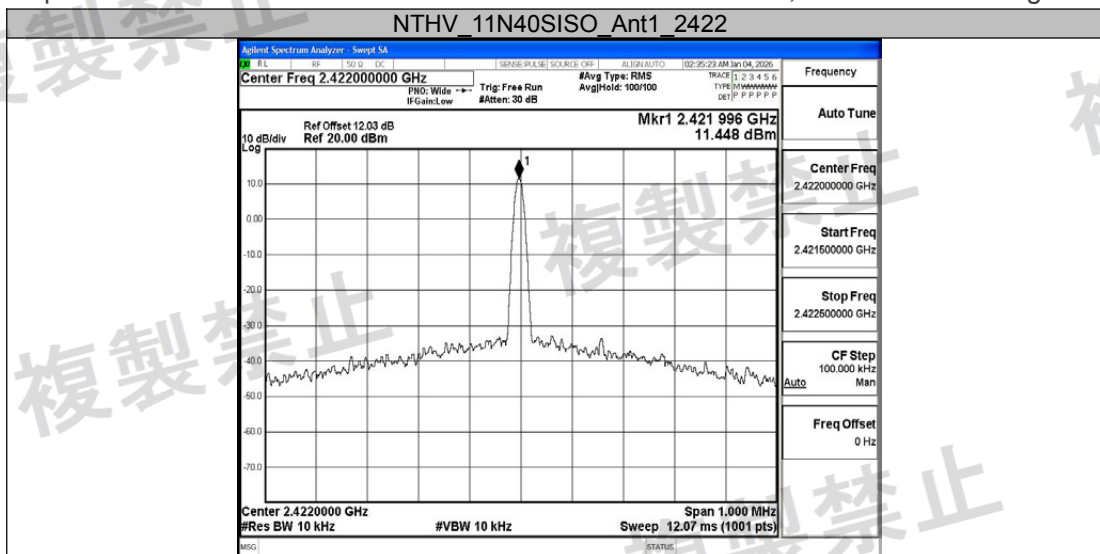

**Appendix B: Occupied Bandwidth****Test Result**

TestCondition	TestMode	Antenna	Freq(MHz)	Result [MHz]	Limit [MHz]	Verdict
NTNV	11B	Ant1	2412	14.901	≤26	PASS
			2442	14.881	≤26	PASS
			2472	14.816	≤26	PASS
	11G	Ant1	2412	16.467	≤26	PASS
			2442	16.554	≤26	PASS
			2472	16.505	≤26	PASS
	11N20SI SO	Ant1	2412	17.693	≤26	PASS
			2442	17.715	≤26	PASS
			2472	17.615	≤26	PASS
	11N40SI SO	Ant1	2422	35.934	26-40	PASS
			2442	35.980	26-40	PASS
			2462	36.037	26-40	PASS
NTLV	11B	Ant1	2412	14.914	≤26	PASS
			2442	14.884	≤26	PASS
			2472	14.821	≤26	PASS
	11G	Ant1	2412	16.634	≤26	PASS
			2442	16.602	≤26	PASS
			2472	16.529	≤26	PASS
	11N20SI SO	Ant1	2412	17.664	≤26	PASS
			2442	17.723	≤26	PASS
			2472	17.653	≤26	PASS
	11N40SI SO	Ant1	2422	36.016	26-40	PASS
			2442	35.898	26-40	PASS
			2462	36.050	26-40	PASS
NTHV	11B	Ant1	2412	14.900	≤26	PASS
			2442	14.884	≤26	PASS
			2472	14.810	≤26	PASS
	11G	Ant1	2412	16.535	≤26	PASS
			2442	16.468	≤26	PASS
			2472	16.552	≤26	PASS
	11N20SI SO	Ant1	2412	17.704	≤26	PASS
			2442	17.683	≤26	PASS
			2472	17.704	≤26	PASS
	11N40SI SO	Ant1	2422	35.832	26-40	PASS
			2442	36.046	26-40	PASS
			2462	36.064	26-40	PASS




Test Graphs







NTNV 11G_Ant1_2412

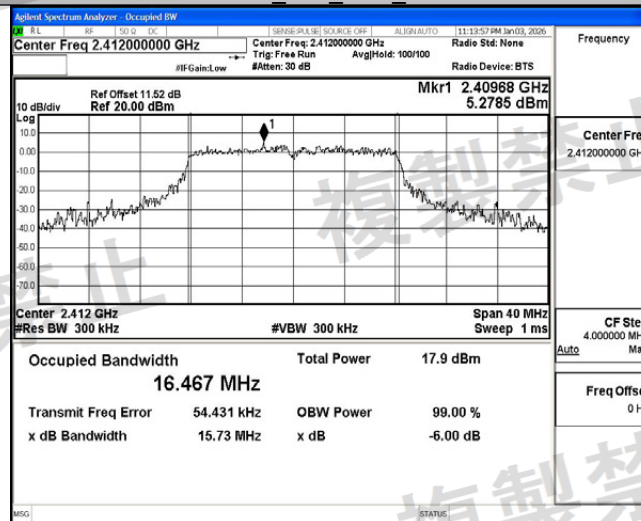

NTNV 11G_Ant1_2442

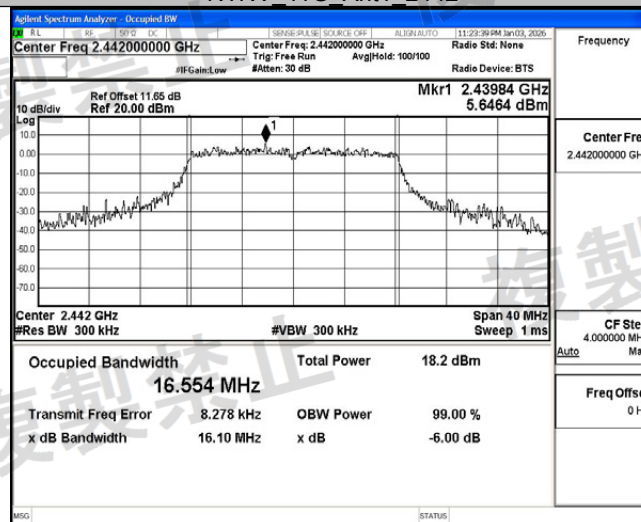


NTNV 11G_Ant1_2472

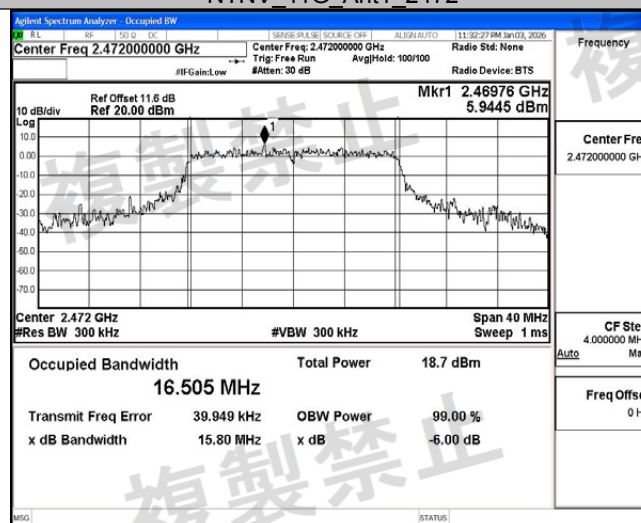





NTNV_11N20SISO_Ant1_2412

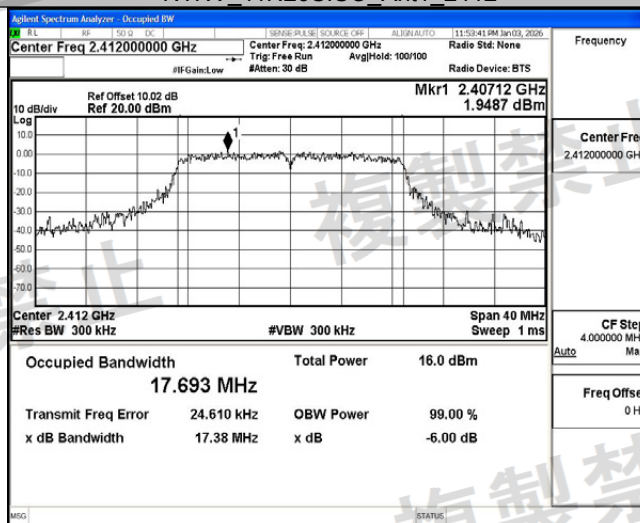

NTNV_11N20SISO_Ant1_2442

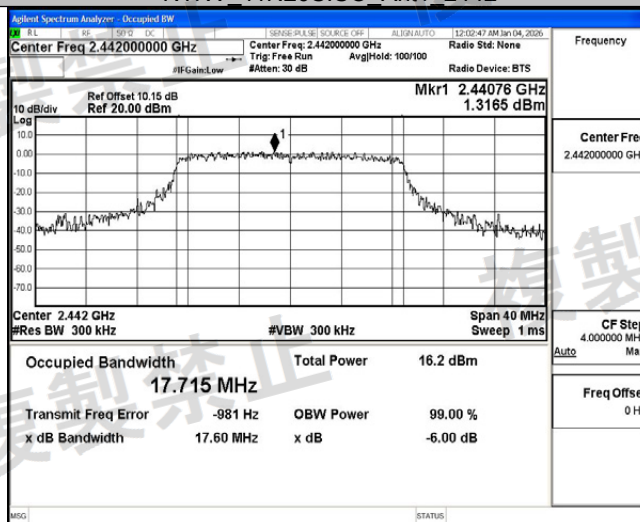


NTNV_11N20SISO_Ant1_2472

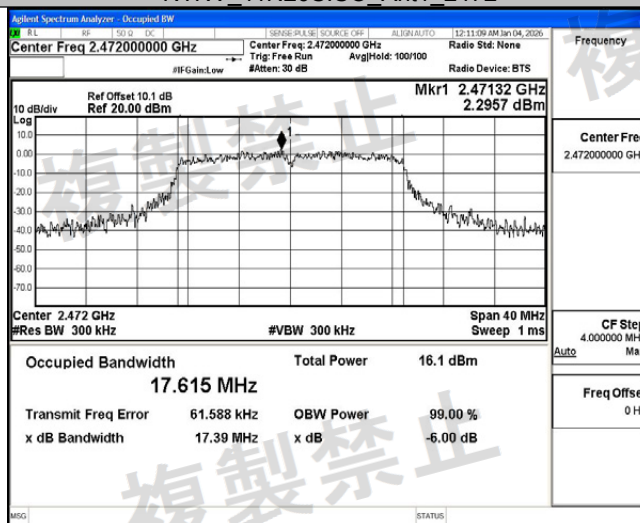





NTNV_11N40SISO_Ant1_2422

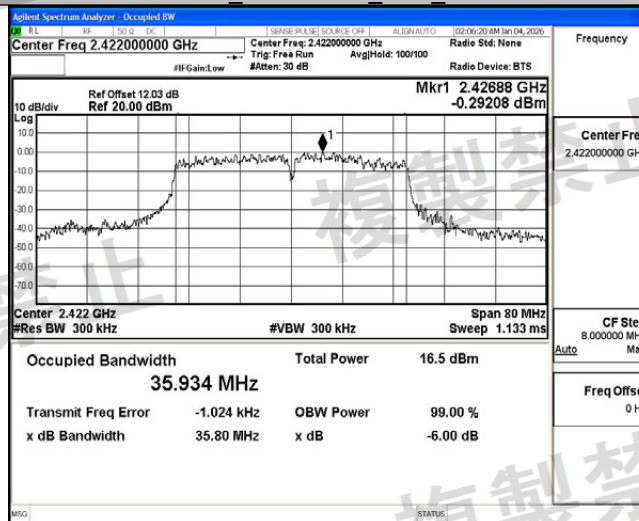

NTNV_11N40SISO_Ant1_2442

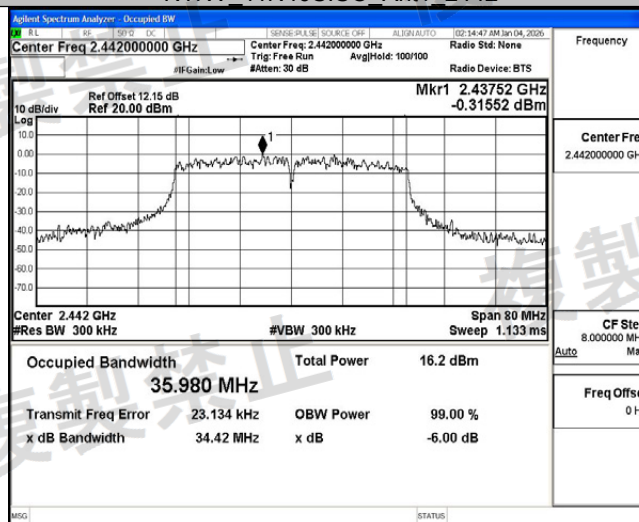


NTNV_11N40SISO_Ant1_2462

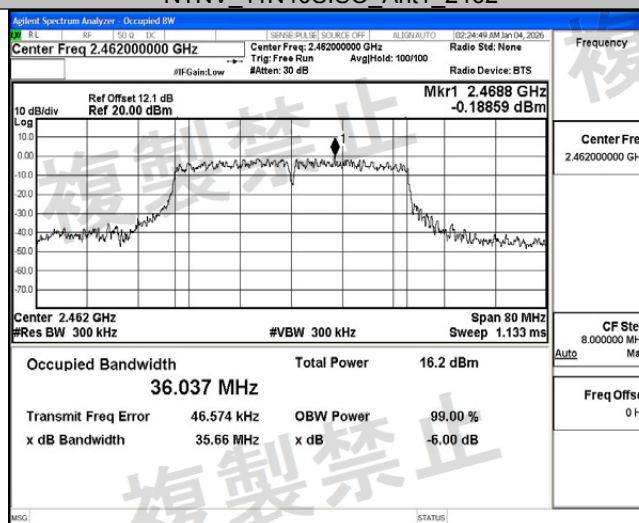





NTLV_11B_Ant1_2412

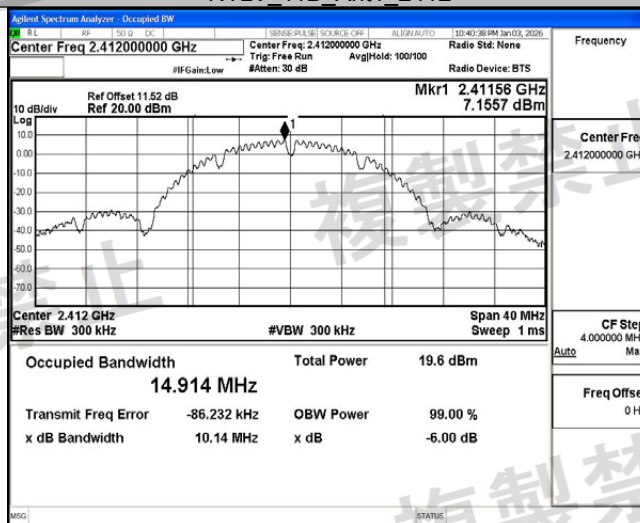

NTLV_11B_Ant1_2442

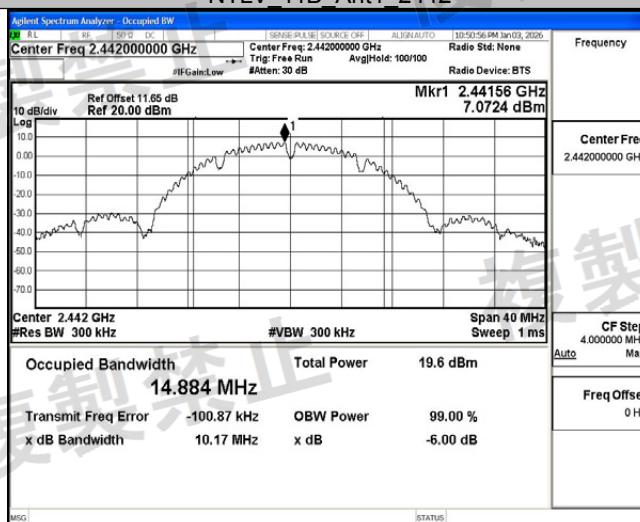


NTLV_11B_Ant1_2472

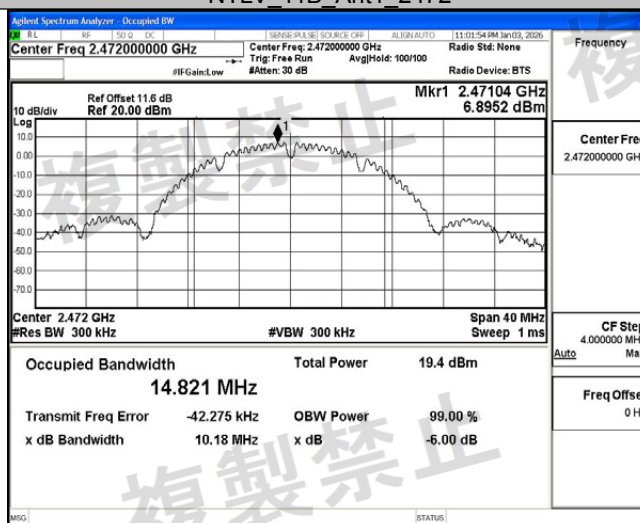





NTLV 11G Ant1 2412

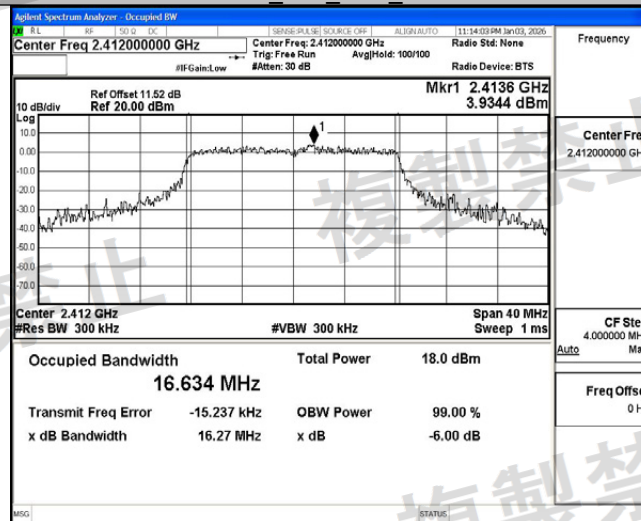

NTLV 11G Ant1 2442

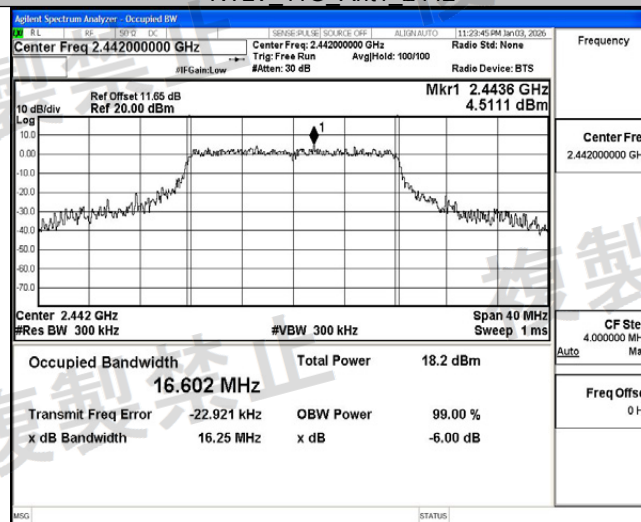


NTLV 11G Ant1 2472

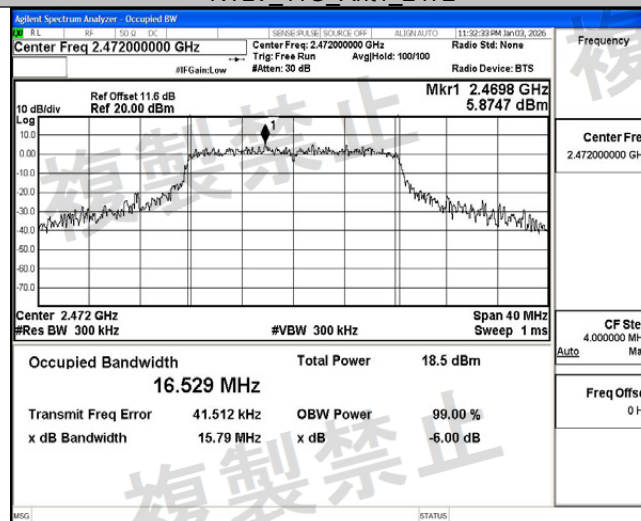





NTLV 11N20SISO Ant1 2412

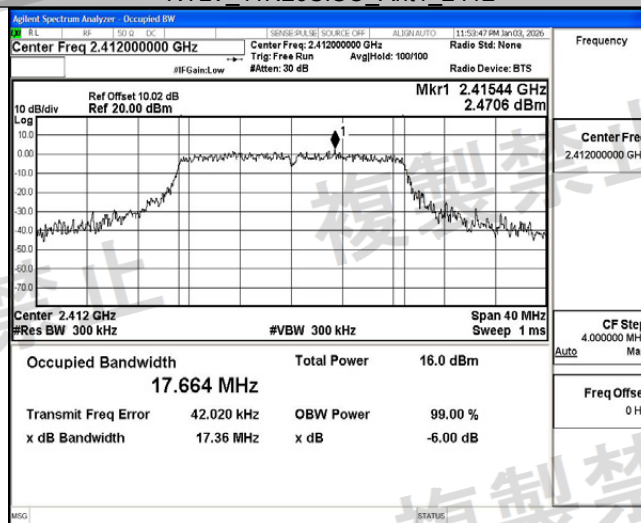

NTLV 11N20SISO Ant1 2442

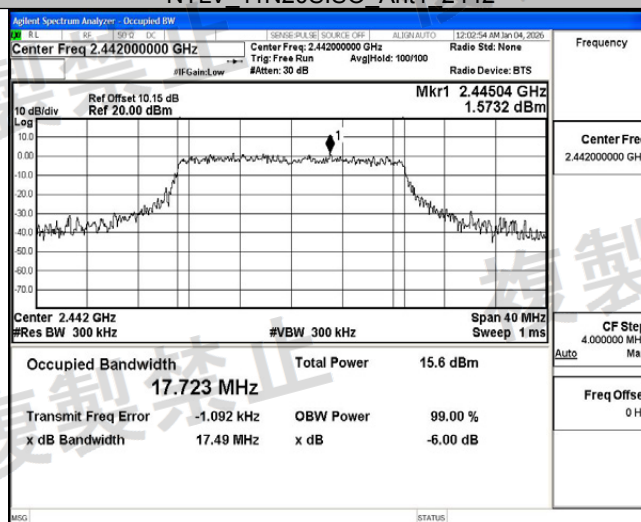


NTLV 11N20SISO Ant1 2472

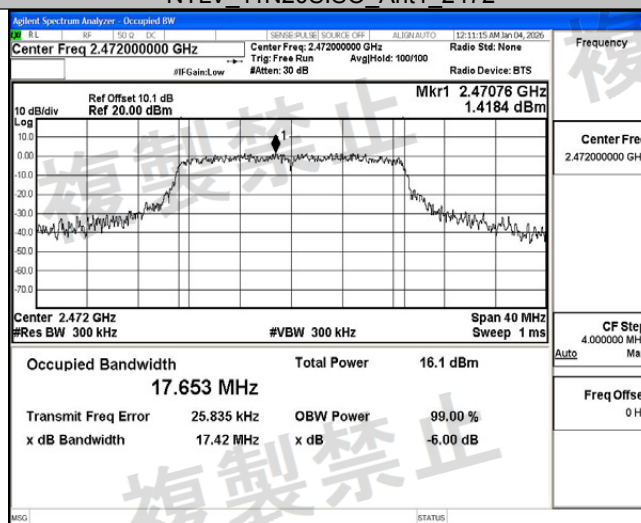





NTLV 11N40SISO Ant1 2422

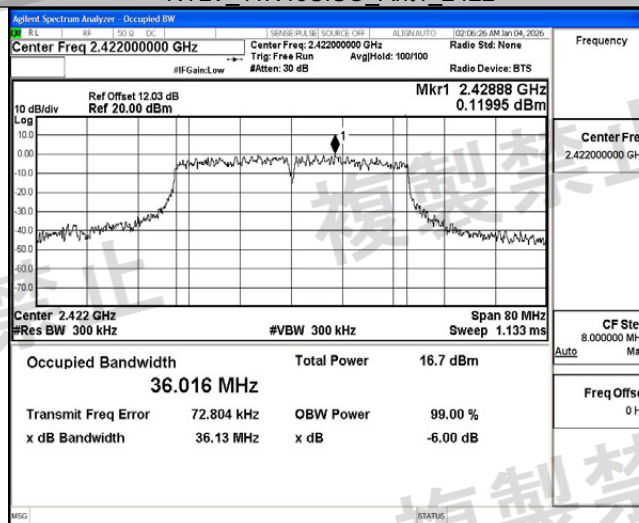

NTLV 11N40SISO Ant1 2442

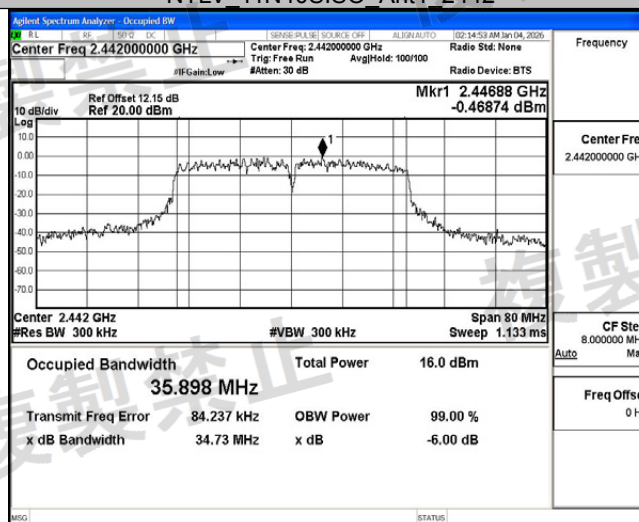


NTLV 11N40SISO Ant1 2462

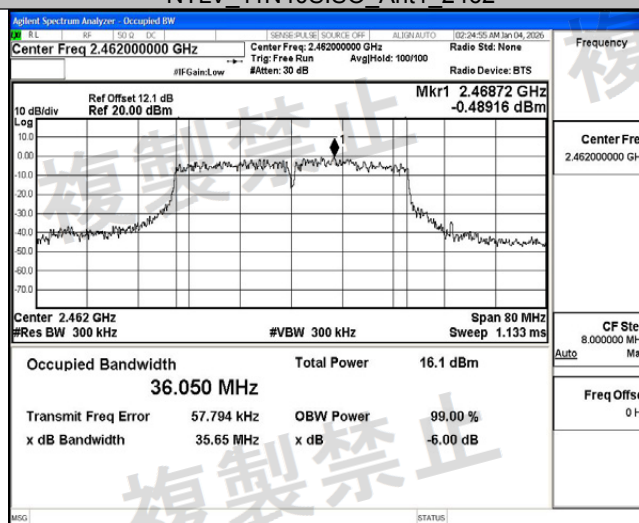





NTHV_11B_Ant1_2412

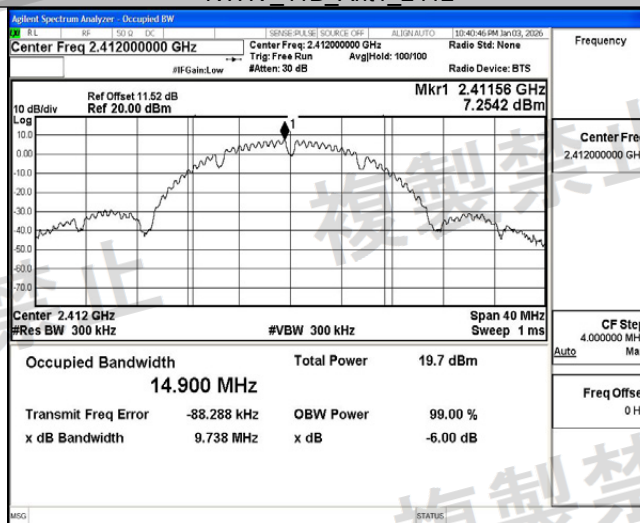

NTHV_11B_Ant1_2442

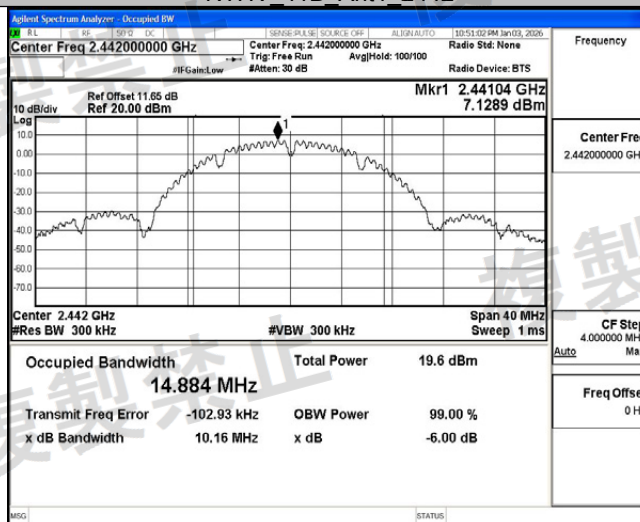


NTHV_11B_Ant1_2472

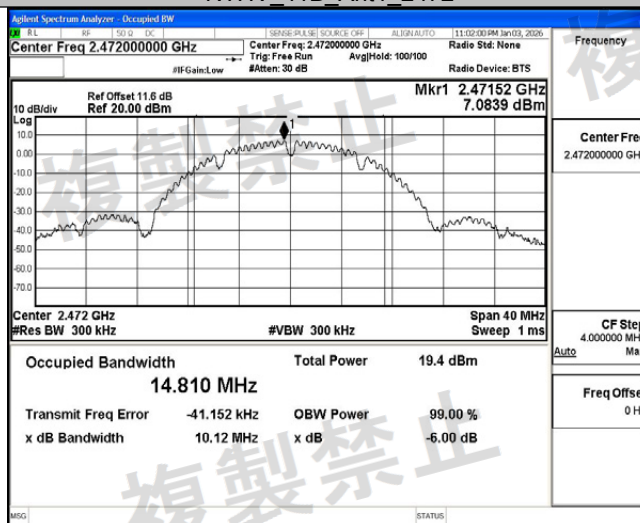





NTHV_11G_Ant1_2412

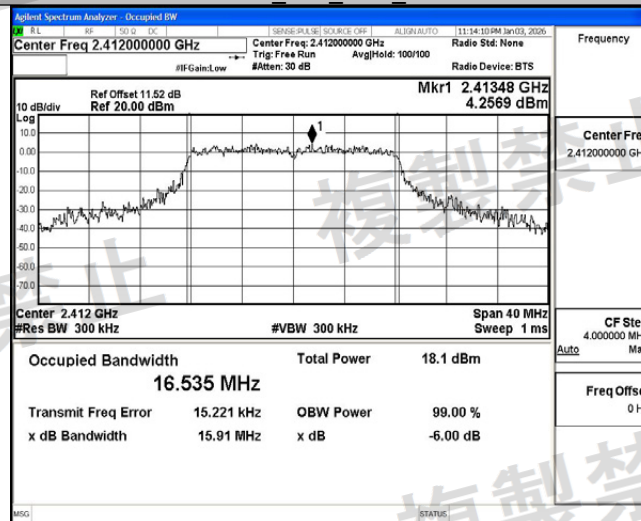

NTHV_11G_Ant1_2442

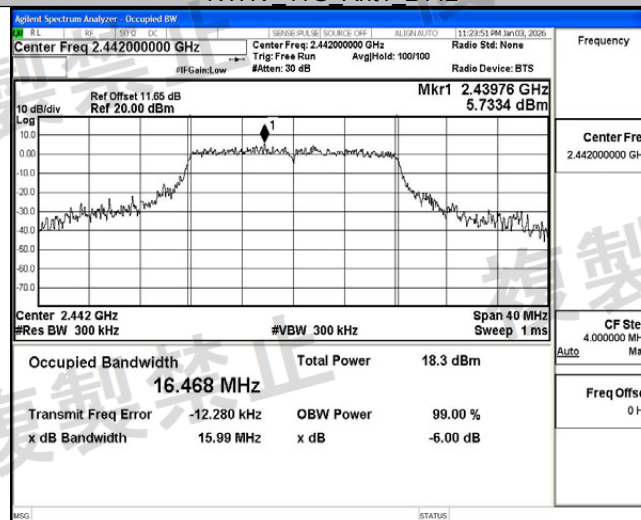


NTHV_11G_Ant1_2472

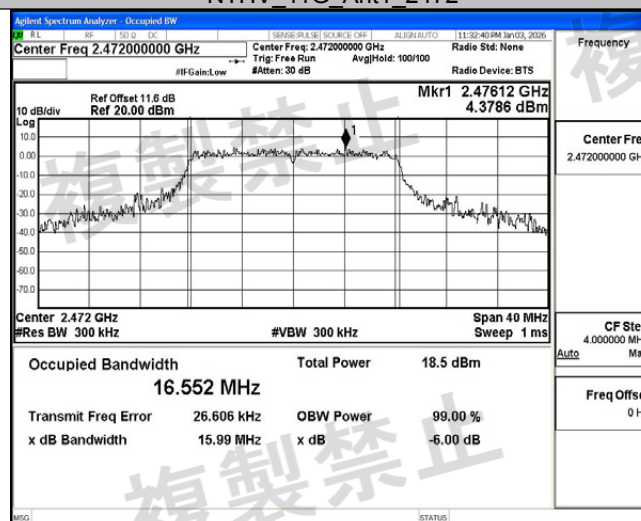





NTHV_11N20SISO_Ant1_2412

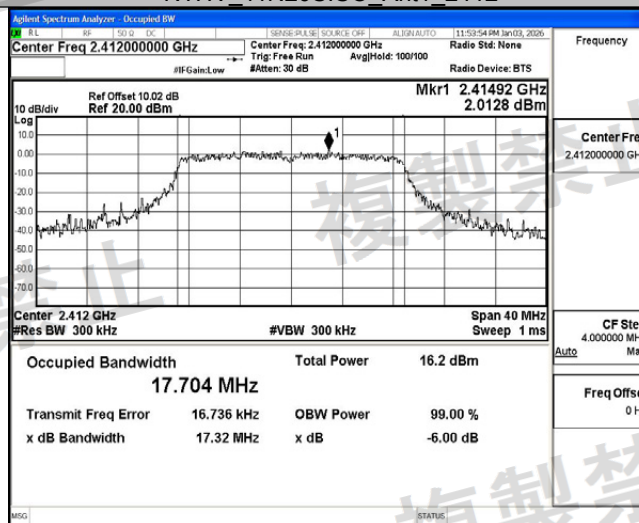

NTHV_11N20SISO_Ant1_2442

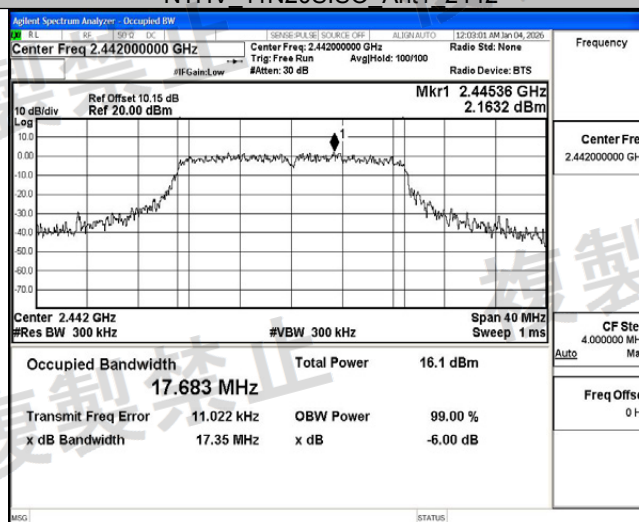


NTHV_11N20SISO_Ant1_2472

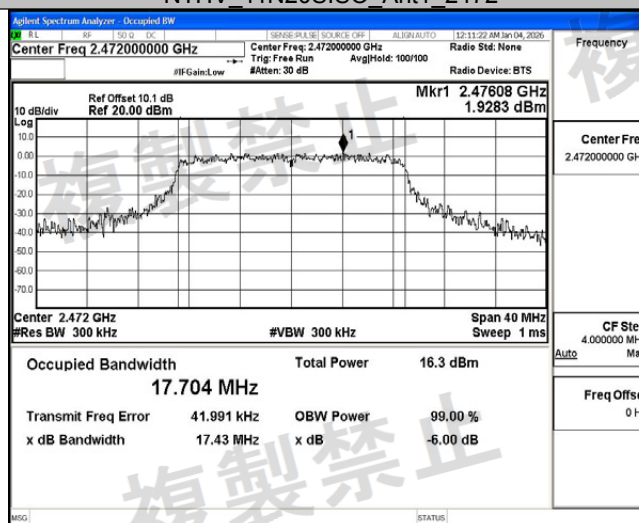





NTHV_11N40SISO_Ant1_2422

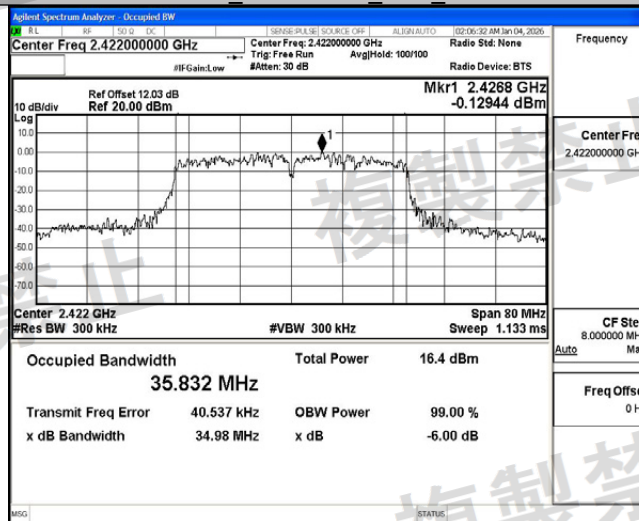

NTHV_11N40SISO_Ant1_2442

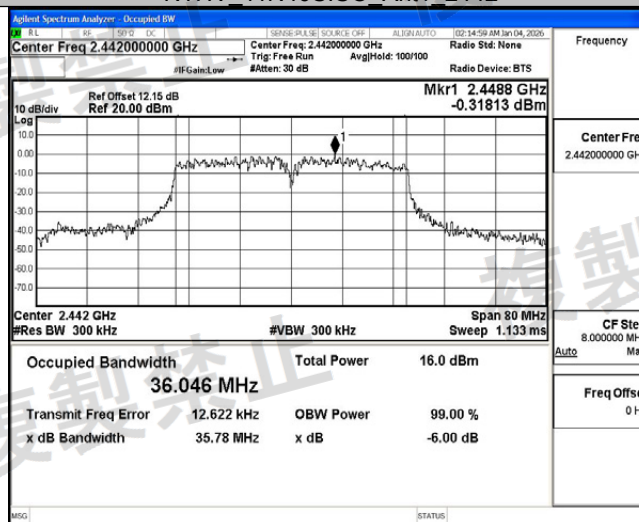

NTHV_11N40SISO_Ant1_2462

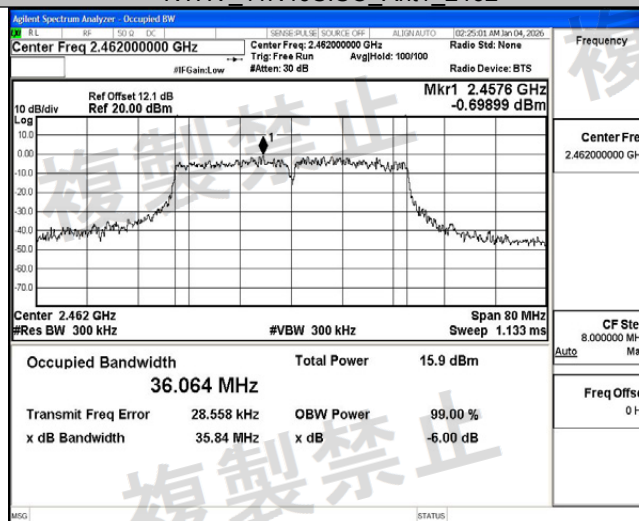


**Appendix C: Spread Bandwidth****Test Result**

TestCondition	TestMode	Antenna	Freq(MHz)	Result [MHz]	Limit [MHz]	Spread Factor	Limit	Verdict
NTNV	11B	Ant1	2412	9.641	≥0.5	7.012	>5	PASS
			2442	9.613	≥0.5	6.991	>5	PASS
			2472	9.582	≥0.5	6.969	>5	PASS
	11G	Ant1	2412	14.506	≥0.5	---	---	PASS
			2442	14.556	≥0.5	---	---	PASS
			2472	14.379	≥0.5	---	---	PASS
	11N20SI SO	Ant1	2412	15.247	≥0.5	---	---	PASS
			2442	15.491	≥0.5	---	---	PASS
			2472	15.240	≥0.5	---	---	PASS
	11N40SI SO	Ant1	2422	30.891	≥0.5	---	---	PASS
			2442	30.233	≥0.5	---	---	PASS
			2462	31.001	≥0.5	---	---	PASS
NTLV	11B	Ant1	2412	9.634	≥0.5	7.007	>5	PASS
			2442	9.630	≥0.5	7.004	>5	PASS
			2472	9.583	≥0.5	6.969	>5	PASS
	11G	Ant1	2412	14.626	≥0.5	---	---	PASS
			2442	14.461	≥0.5	---	---	PASS
			2472	14.402	≥0.5	---	---	PASS
	11N20SI SO	Ant1	2412	15.226	≥0.5	---	---	PASS
			2442	15.297	≥0.5	---	---	PASS
			2472	15.197	≥0.5	---	---	PASS
	11N40SI SO	Ant1	2422	30.757	≥0.5	---	---	PASS
			2442	30.541	≥0.5	---	---	PASS
			2462	31.476	≥0.5	---	---	PASS
NTHV	11B	Ant1	2412	9.626	≥0.5	7.001	>5	PASS
			2442	9.631	≥0.5	7.004	>5	PASS
			2472	9.580	≥0.5	6.967	>5	PASS
	11G	Ant1	2412	14.325	≥0.5	---	---	PASS
			2442	14.415	≥0.5	---	---	PASS
			2472	14.524	≥0.5	---	---	PASS
	11N20SI SO	Ant1	2412	15.466	≥0.5	---	---	PASS
			2442	15.265	≥0.5	---	---	PASS
			2472	15.325	≥0.5	---	---	PASS
	11N40SI SO	Ant1	2422	31.222	≥0.5	---	---	PASS
			2442	31.206	≥0.5	---	---	PASS
			2462	31.189	≥0.5	---	---	PASS




Test Graphs

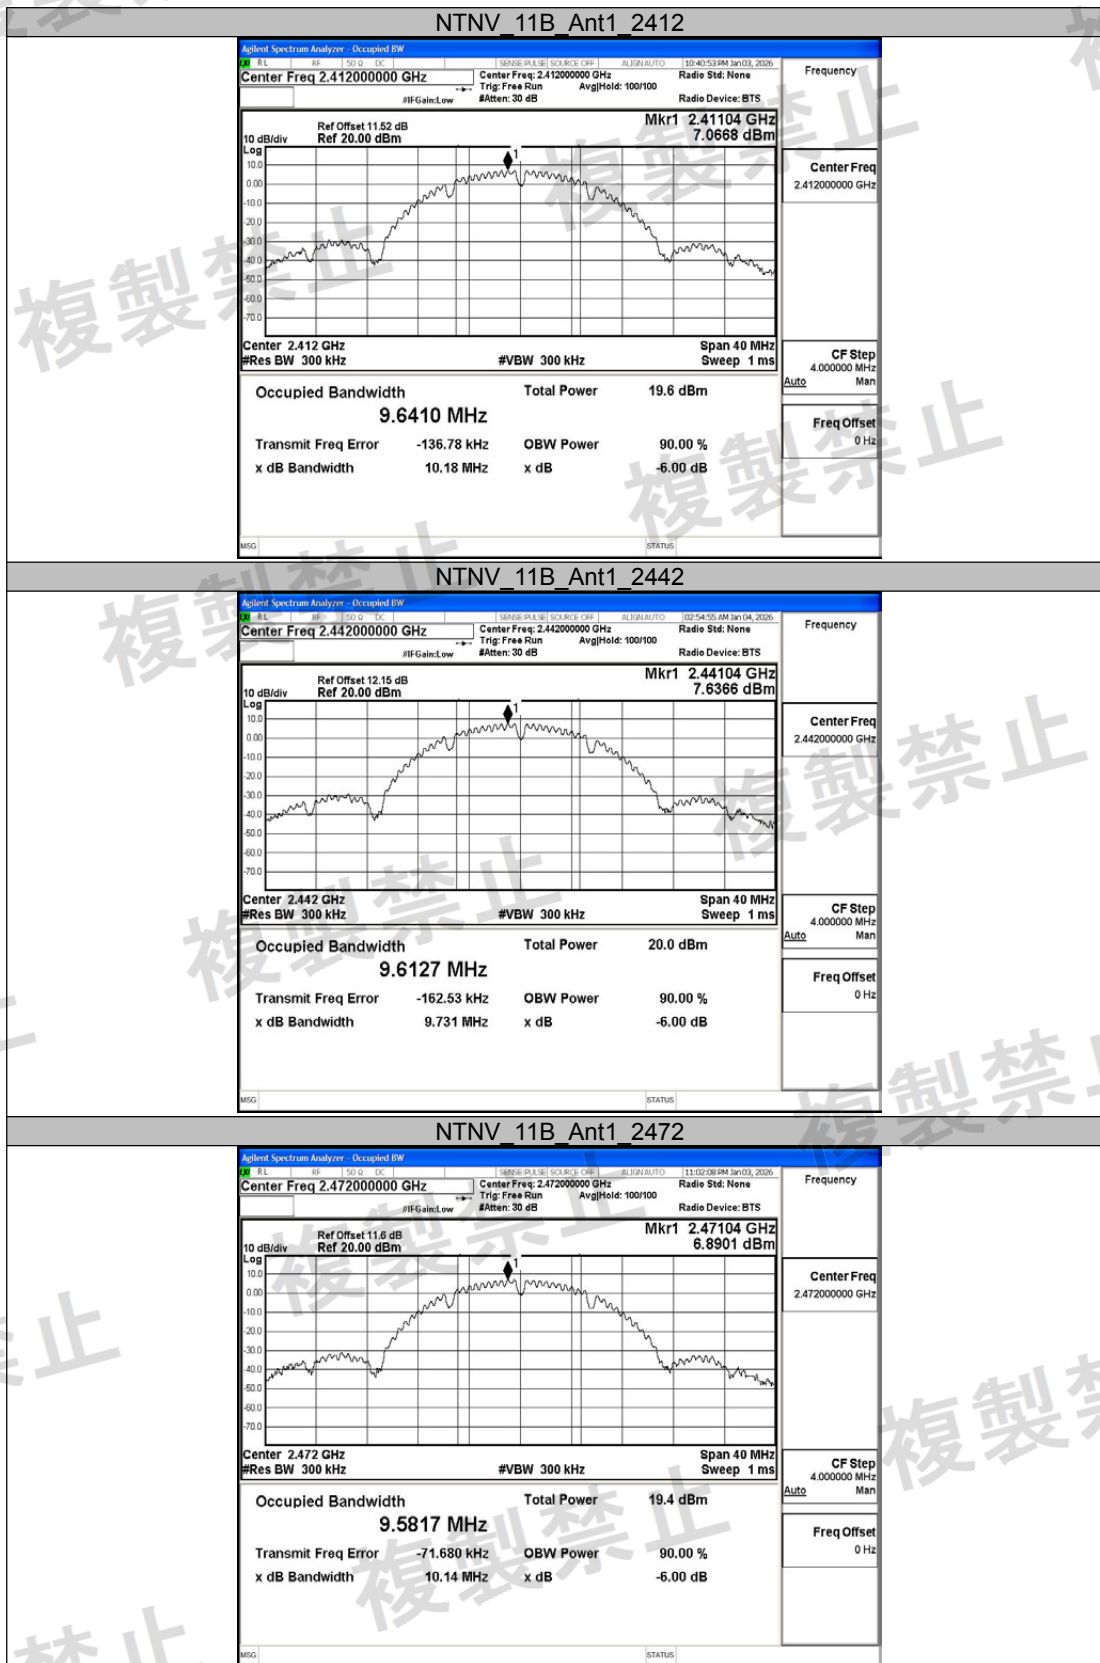





NTNV 11G_Ant1_2412

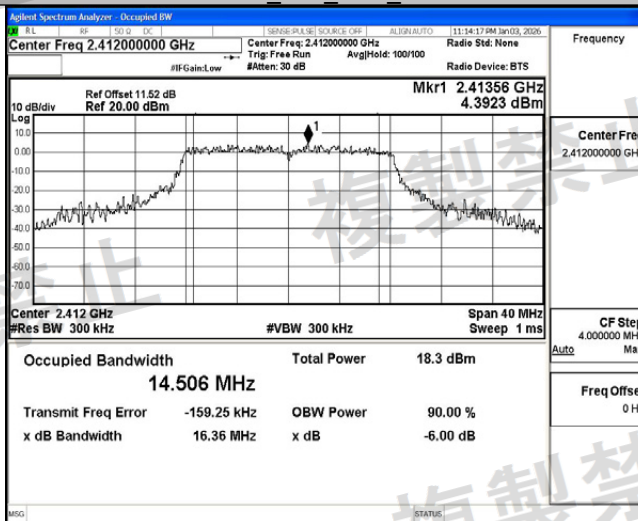

NTNV 11G_Ant1_2442

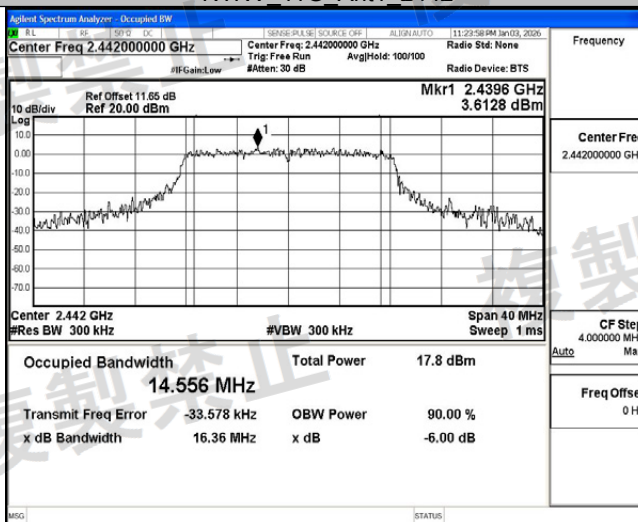


NTNV 11G_Ant1_2472

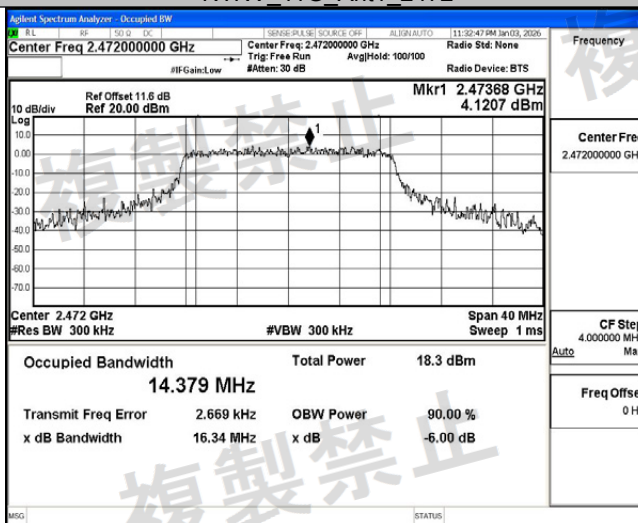





NTNV_11N20SISO_Ant1_2412

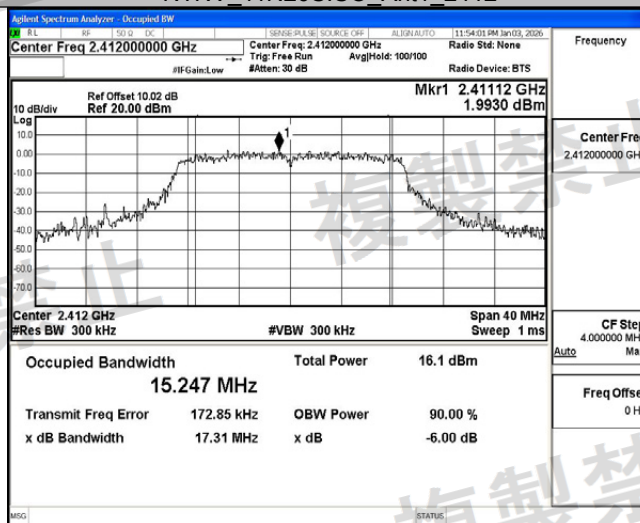

NTNV_11N20SISO_Ant1_2442

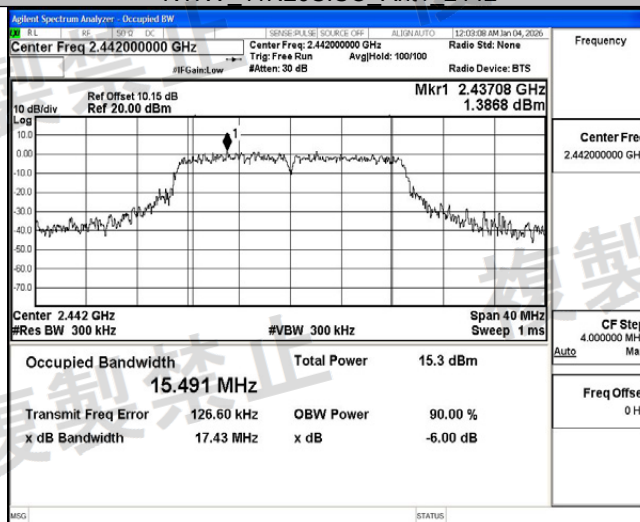


NTNV_11N20SISO_Ant1_2472

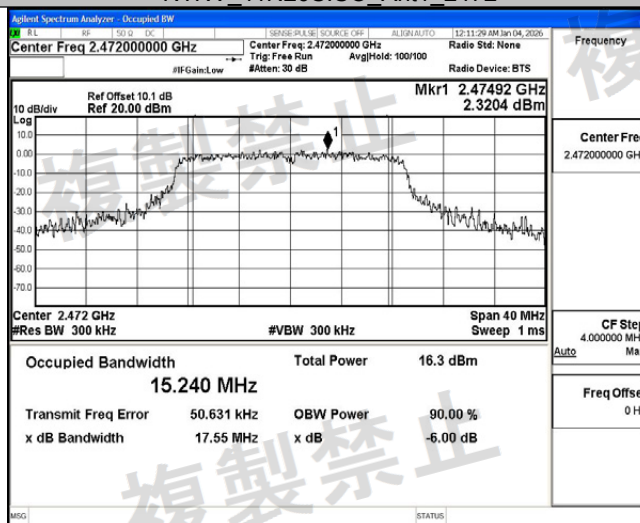





NTNV_11N40SISO_Ant1_2422

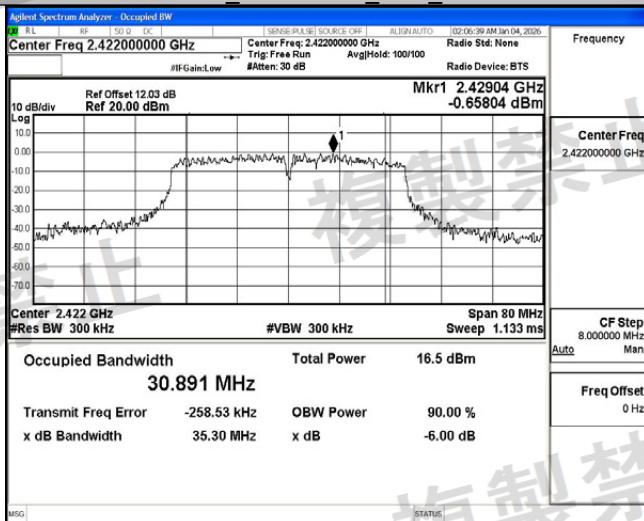

NTNV_11N40SISO_Ant1_2442

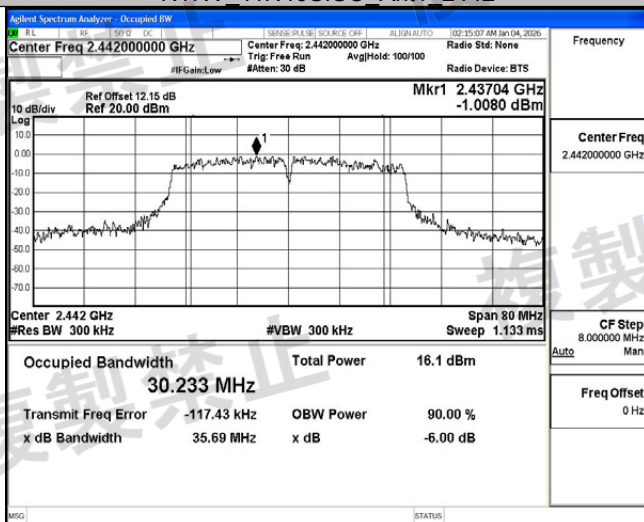


NTNV_11N40SISO_Ant1_2462

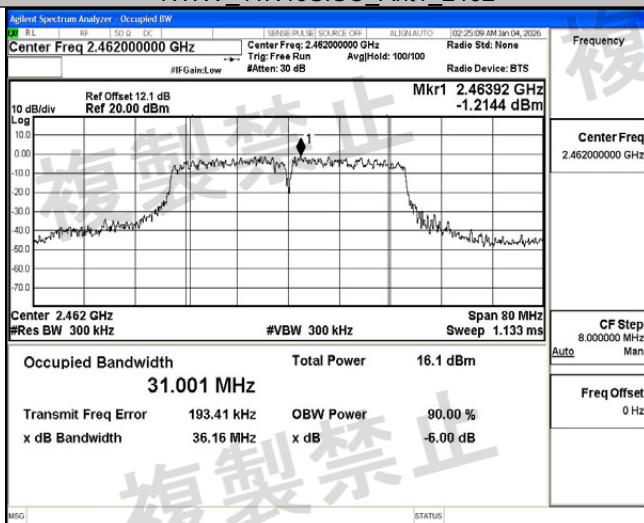





NTLV_11B_Ant1_2412

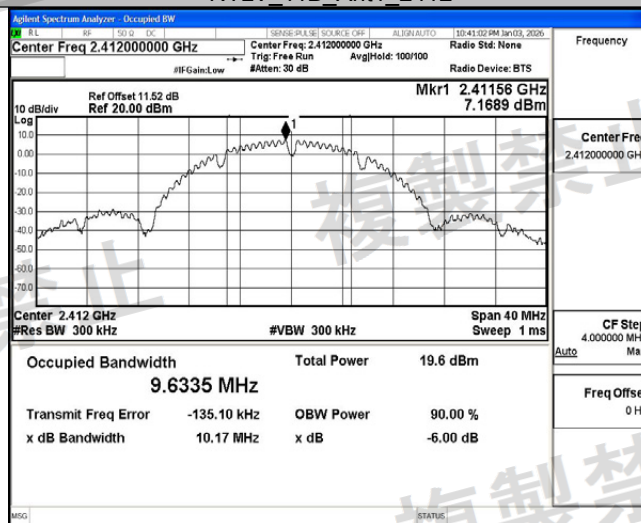

NTLV_11B_Ant1_2442

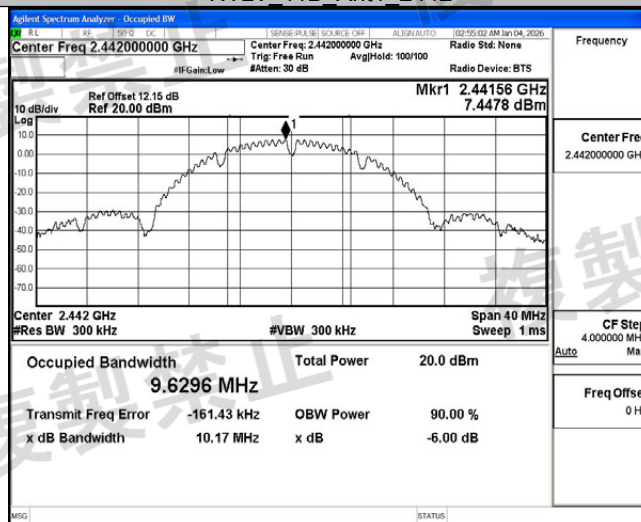


NTLV_11B_Ant1_2472

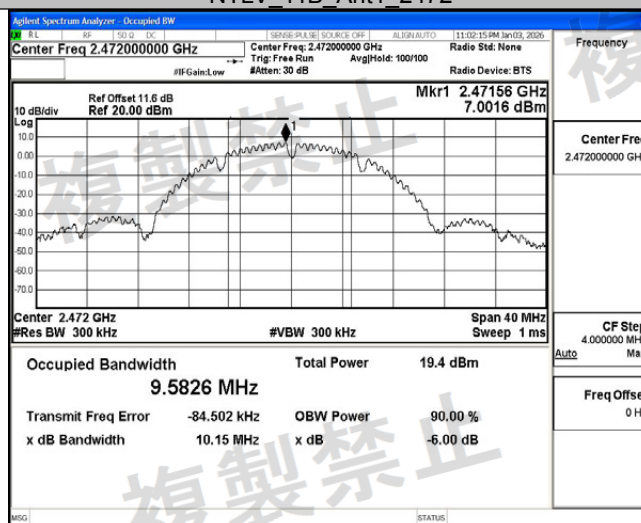





NTLV 11G Ant1 2412

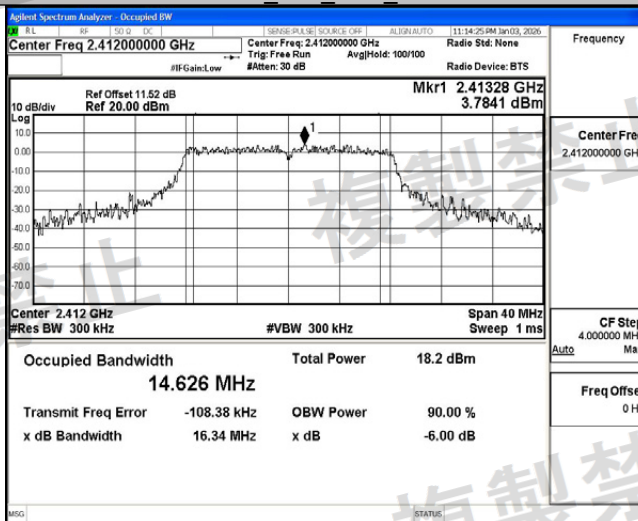

NTLV 11G Ant1 2442

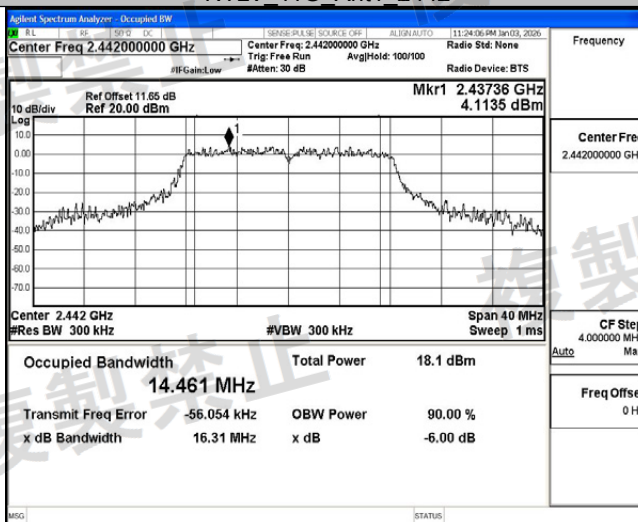


NTLV 11G Ant1 2472

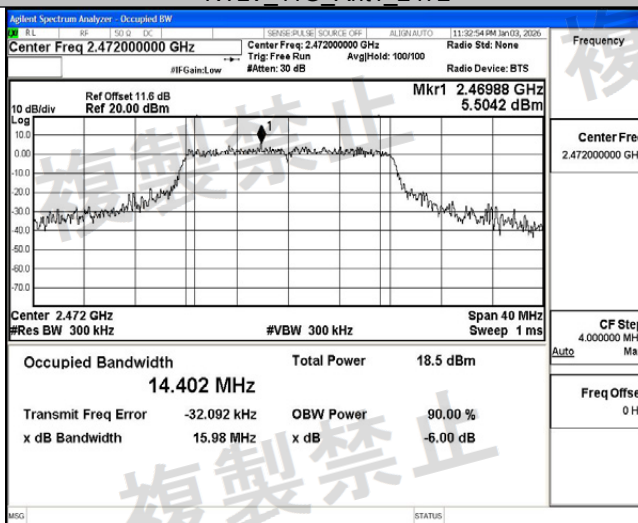





NTLV 11N20SISO Ant1 2412

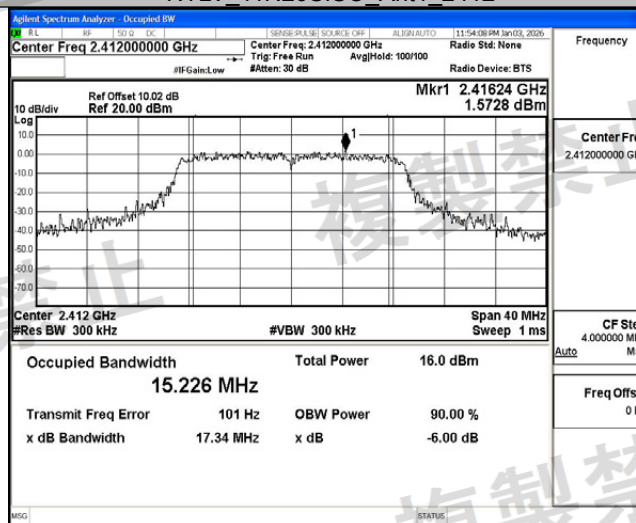

NTLV 11N20SISO Ant1 2442

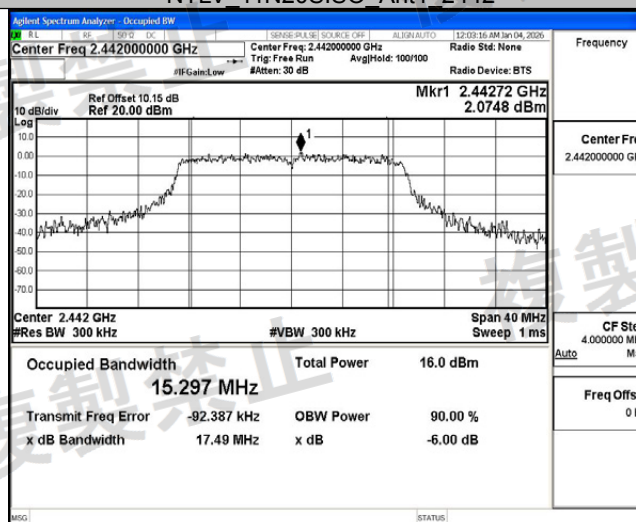


NTLV 11N20SISO Ant1 2472

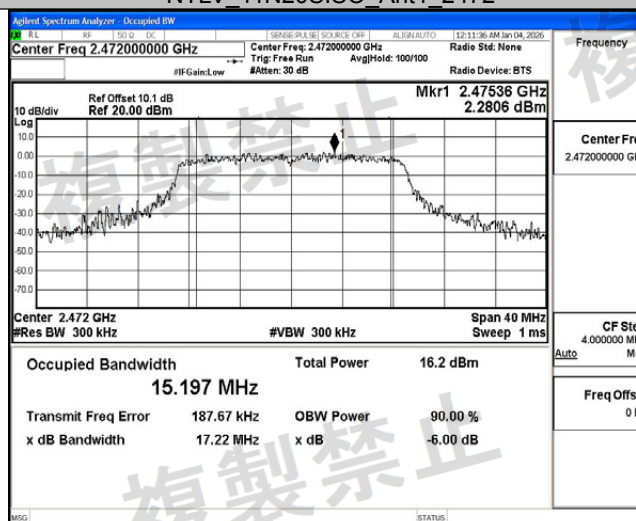





NTLV 11N40SISO Ant1 2422

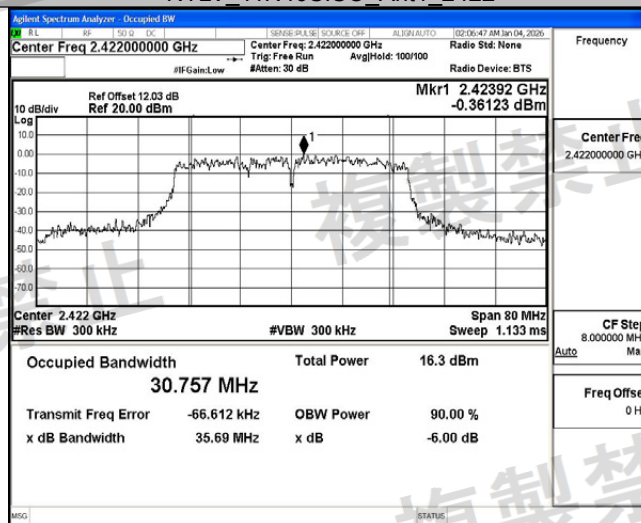

NTLV 11N40SISO Ant1 2442

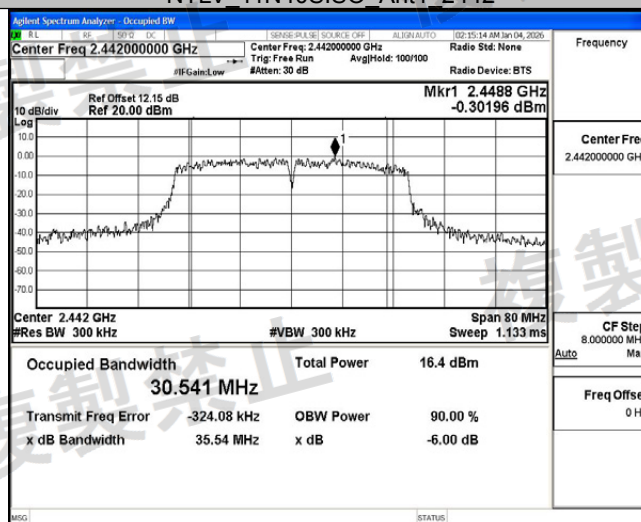


NTLV 11N40SISO Ant1 2462

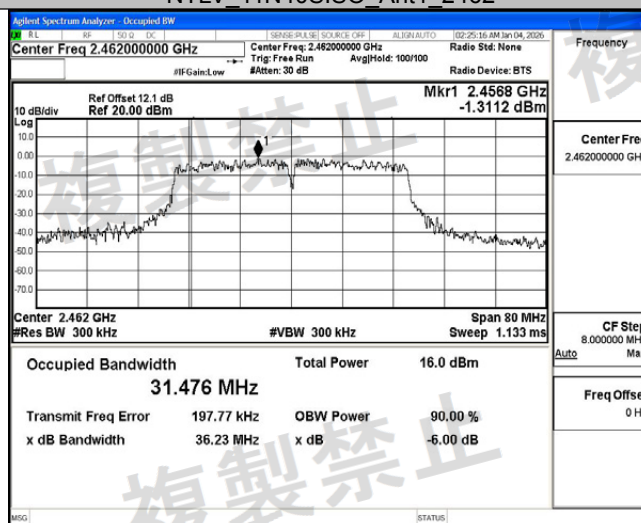





NTHV_11B_Ant1_2412

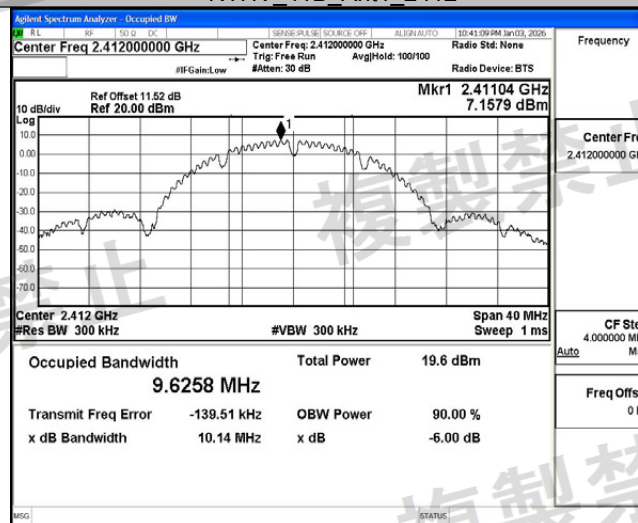

NTHV_11B_Ant1_2442

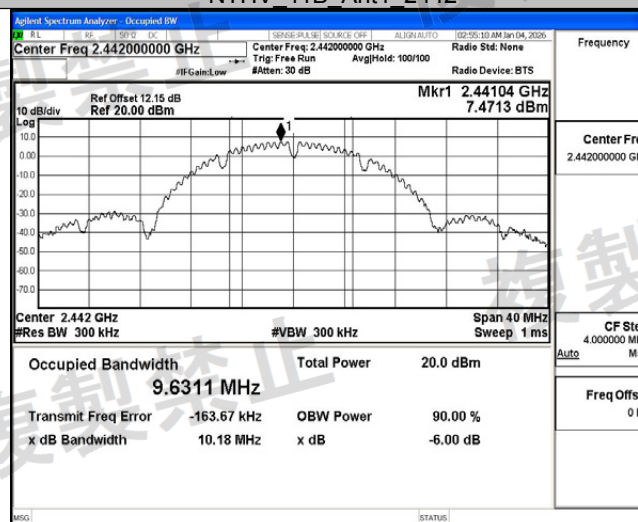


NTHV_11B_Ant1_2472

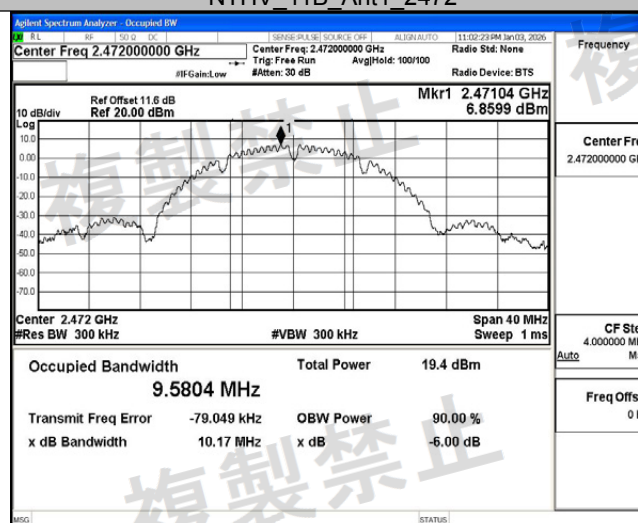





NTHV_11G_Ant1_2412

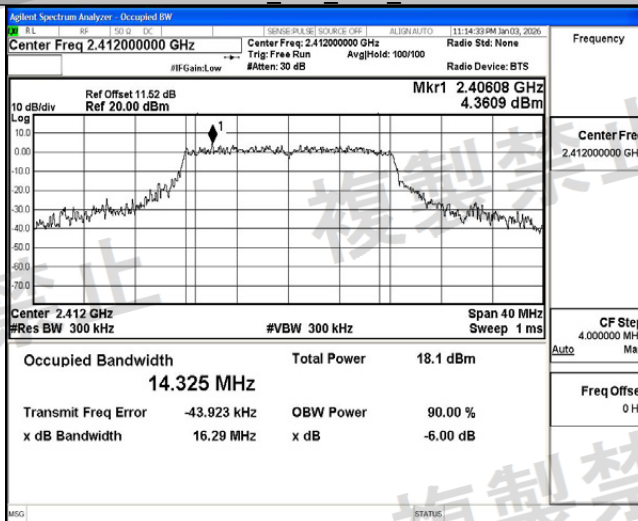

NTHV_11G_Ant1_2442

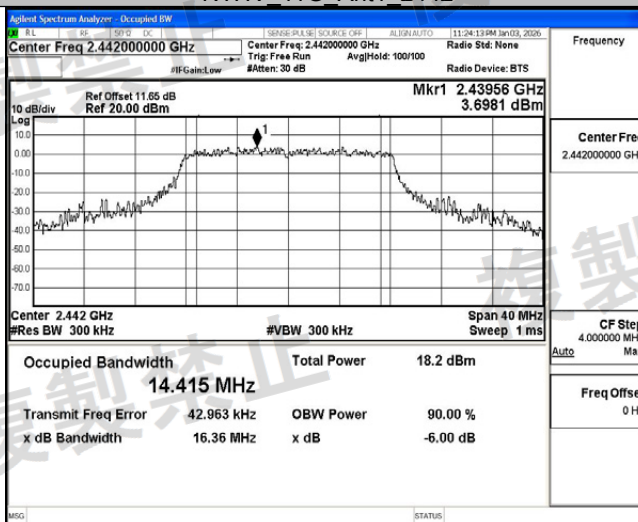


NTHV_11G_Ant1_2472

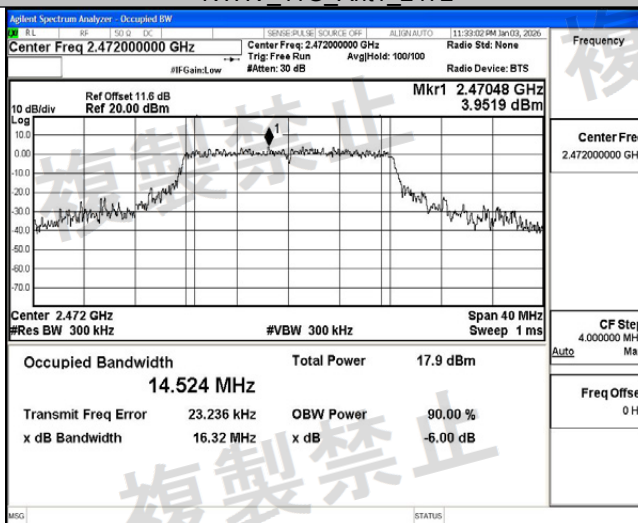





NTHV_11N20SISO Ant1_2412

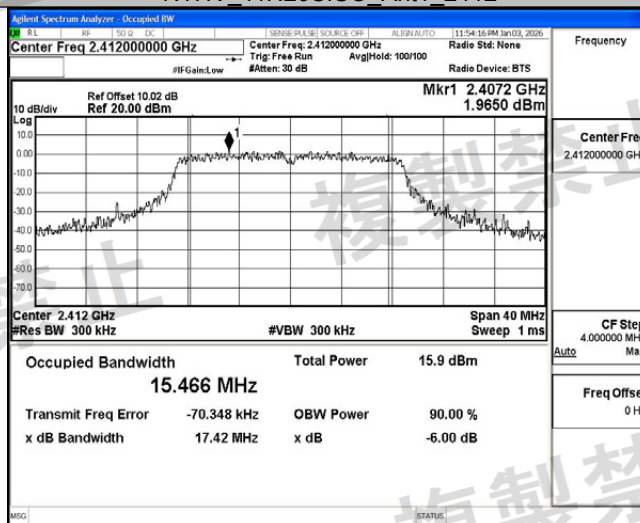

NTHV_11N20SISO Ant1_2442

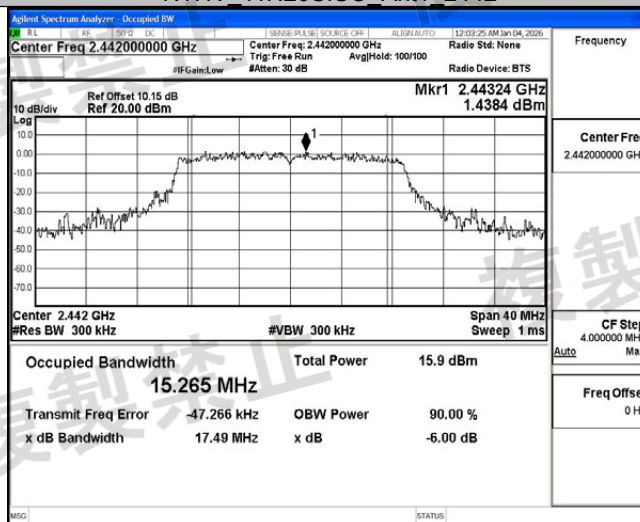


NTHV_11N20SISO Ant1_2472

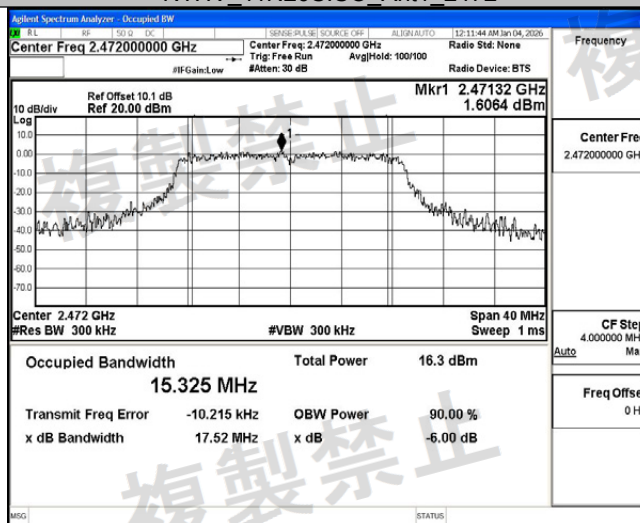





NTHV_11N40SISO Ant1 2422

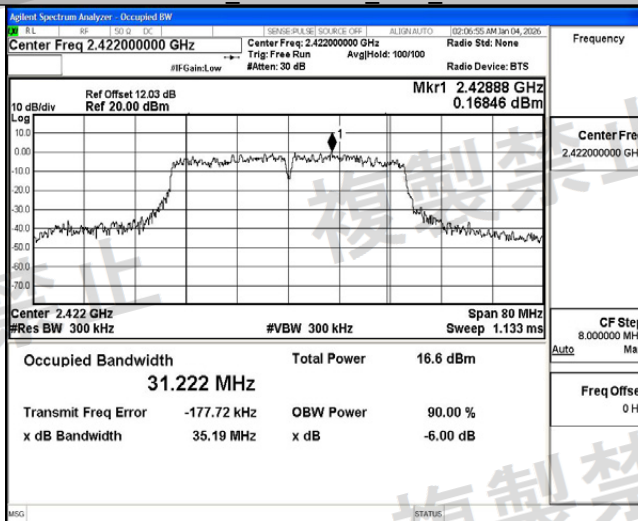

NTHV_11N40SISO Ant1 2442

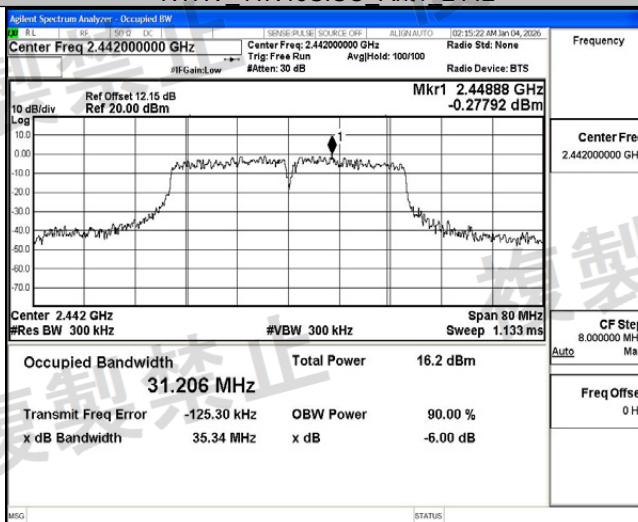

NTHV_11N40SISO Ant1 2462

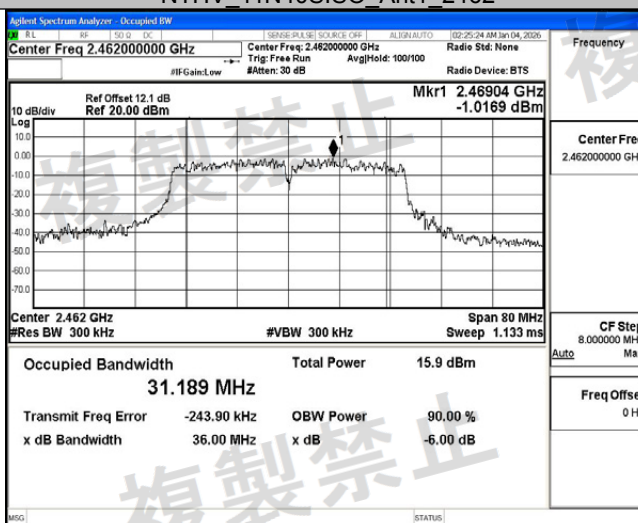

**Appendix D: Antenna Power****Test Result**

Antenna Power							
Test Condition	Test Mode	Antenna	Freq(MHz)	Result (dBm/MHz)	Result(mW/MHz)	Limit (mW/MHz)	Verdict
NTNV	11B	Ant1	2412	8.83	7.6384	≤10	PASS
			2442	10.00	10.0000	≤10	PASS
			2472	9.36	8.6298	≤10	PASS
	11G	Ant1	2412	9.54	8.9950	≤10	PASS
			2442	9.54	8.9950	≤10	PASS
			2472	8.32	6.7920	≤10	PASS
	11N20SI SO	Ant1	2412	7.40	5.4954	≤10	PASS
			2442	7.35	5.4325	≤10	PASS
			2472	7.80	6.0256	≤10	PASS
	11N40SI SO	Ant1	2422	5.23	3.3343	≤5	PASS
			2442	4.79	3.0130	≤5	PASS
			2462	4.82	3.0339	≤5	PASS
NTLV	11B	Ant1	2412	9.45	8.8105	≤10	PASS
			2442	10.00	10.0000	≤10	PASS
			2472	9.28	8.4723	≤10	PASS
	11G	Ant1	2412	9.66	9.2470	≤10	PASS
			2442	9.55	9.0157	≤10	PASS
			2472	8.64	7.3114	≤10	PASS
	11N20SI SO	Ant1	2412	7.36	5.4450	≤10	PASS
			2442	7.45	5.5590	≤10	PASS
			2472	7.41	5.5081	≤10	PASS
	11N40SI SO	Ant1	2422	4.58	2.8708	≤5	PASS
			2442	4.62	2.8973	≤5	PASS
			2462	4.83	3.0409	≤5	PASS
NTHV	11B	Ant1	2412	8.77	7.5336	≤10	PASS
			2442	9.76	9.4624	≤10	PASS
			2472	9.17	8.2604	≤10	PASS
	11G	Ant1	2412	9.53	8.9743	≤10	PASS
			2442	9.39	8.6896	≤10	PASS
			2472	8.45	6.9984	≤10	PASS
	11N20SI SO	Ant1	2412	7.05	5.0699	≤10	PASS
			2442	7.30	5.3703	≤10	PASS
			2472	7.41	5.5081	≤10	PASS
	11N40SI SO	Ant1	2422	5.22	3.3266	≤5	PASS
			2442	3.76	2.3768	≤5	PASS
			2462	4.83	3.0409	≤5	PASS



Tolerance								
Test Condition	Test Mode	Antenna	Freq(MHz)	Power (mW/MHz)	RatedPower (mW/MHz)	Result (%)	Limit (%)	Verdict
NTNV	11B	Ant1	2412	7.6384	10	-23.62	+20	PASS
			2442	10.0000	10	0.00	+20	PASS
			2472	8.6298	10	-13.70	+20	PASS
	11G	Ant1	2412	8.9950	10	-10.05	+20	PASS
			2442	8.9950	10	-10.05	+20	PASS
			2472	6.7920	10	-32.08	+20	PASS
	11N20SI SO	Ant1	2412	5.4954	10	-45.05	+20	PASS
			2442	5.4325	10	-45.68	+20	PASS
			2472	6.0256	10	-39.74	+20	PASS
	11N40SI SO	Ant1	2422	3.3343	5	-33.31	+20	PASS
			2442	3.0130	5	-39.74	+20	PASS
			2462	3.0339	5	-39.32	+20	PASS
NTLV	11B	Ant1	2412	8.8105	10	-11.90	+20	PASS
			2442	10.0000	10	0.00	+20	PASS
			2472	8.4723	10	-15.28	+20	PASS
	11G	Ant1	2412	9.2470	10	-7.53	+20	PASS
			2442	9.0157	10	-9.84	+20	PASS
			2472	7.3114	10	-26.89	+20	PASS
	11N20SI SO	Ant1	2412	5.4450	10	-45.55	+20	PASS
			2442	5.5590	10	-44.41	+20	PASS
			2472	5.5081	10	-44.92	+20	PASS
	11N40SI SO	Ant1	2422	2.8708	5	-42.58	+20	PASS
			2442	2.8973	5	-42.05	+20	PASS
			2462	3.0409	5	-39.18	+20	PASS
NTHV	11B	Ant1	2412	7.5336	10	-24.66	+20	PASS
			2442	9.4624	10	-5.38	+20	PASS
			2472	8.2604	10	-17.40	+20	PASS
	11G	Ant1	2412	8.9743	10	-10.26	+20	PASS
			2442	8.6896	10	-13.10	+20	PASS
			2472	6.9984	10	-30.02	+20	PASS
	11N20SI SO	Ant1	2412	5.0699	10	-49.30	+20	PASS
			2442	5.3703	10	-46.30	+20	PASS
			2472	5.5081	10	-44.92	+20	PASS
	11N40SI SO	Ant1	2422	3.3266	5	-33.47	+20	PASS
			2442	2.3768	5	-52.46	+20	PASS
			2462	3.0409	5	-39.18	+20	PASS



Appendix E: Spurious Emission of TX

Test Result 1

TestCondition	TestMode	Antenna	Channel (MHz)	Freq.Range [MHz]	Freq (MHz)	Result [dBm]	Limit [dBm]	Result [μW]	Limit [μW]	Verdict
NTNV	11B	Ant1	2412	30~1000	843.35	-49.44	≤-26	0.01138	≤2.5	PASS
				1000~2387	2386.65	-42.84	≤-26	0.05200	≤2.5	PASS
				2387~2400	2397.41	-25.62	≤-16	2.74157	≤25	PASS
				2483.5~2496.5	2484.63	-37.77	≤-16	0.16711	≤25	PASS
				2496.5~13000	4824.08	-41.14	≤-26	0.07691	≤2.5	PASS
			2442	30~1000	885.78	-49.54	≤-26	0.01112	≤2.5	PASS
				1000~2387	1922.36	-42.58	≤-26	0.05521	≤2.5	PASS
				2387~2400	2391.62	-37.22	≤-16	0.18967	≤25	PASS
				2483.5~2496.5	2492.98	-36.95	≤-16	0.20184	≤25	PASS
				2496.5~13000	4883.95	-41.83	≤-26	0.06561	≤2.5	PASS
			2472	30~1000	659.05	-49.70	≤-26	0.01072	≤2.5	PASS
				1000~2387	1921.66	-45.66	≤-26	0.02716	≤2.5	PASS
				2387~2400	2392.70	-37.01	≤-16	0.19907	≤25	PASS
				2483.5~2496.5	2485.90	-28.22	≤-16	1.50661	≤25	PASS
				2496.5~13000	3642.43	-42.74	≤-26	0.05321	≤2.5	PASS
	11G	Ant1	2412	30~1000	831.71	-49.17	≤-26	0.01211	≤2.5	PASS
				1000~2387	2386.65	-37.00	≤-26	0.19953	≤2.5	PASS
				2387~2400	2400	-17.68	≤-16	17.0608 ₂	≤25	See table below
				2483.5~2496.5	2488.84	-37.47	≤-16	0.17906	≤25	PASS
				2496.5~13000	3693.90	-42.53	≤-26	0.05585	≤2.5	PASS
			2442	30~1000	916.58	-49.40	≤-26	0.01148	≤2.5	PASS
				1000~2387	1933.10	-43.52	≤-26	0.04446	≤2.5	PASS
				2387~2400	2398.26	-36.11	≤-16	0.24491	≤25	PASS
				2483.5~2496.5	2484.81	-37.07	≤-16	0.19634	≤25	PASS
				2496.5~13000	4885.52	-40.59	≤-26	0.08730	≤2.5	PASS
			2472	30~1000	931.13	-51.56	≤-26	0.00698	≤2.5	PASS
				1000~2387	2299.27	-48.60	≤-26	0.01380	≤2.5	PASS
				2387~2400	2395.65	-39.43	≤-16	0.11402	≤25	PASS
				2483.5~2496.5	2484.74	-15.90	≤-16	25.7039 ₆	≤25	See table below
				2496.5~13000	2497.03	-40.59	≤-26	0.08730	≤2.5	PASS
	11N20SI SO	Ant1	2412	30~1000	744.16	-51.50	≤-26	0.00708	≤2.5	PASS
				1000~2387	2386.65	-36.25	≤-26	0.23714	≤2.5	PASS
				2387~2400	2400	-14.14	≤-16	38.5478 ₄	≤25	See table below
				2483.5~2496.5	2494.26	-39.53	≤-16	0.11143	≤25	PASS
				2496.5~13000	4830.90	-43.52	≤-26	0.04446	≤2.5	PASS
			2442	30~1000	880.69	-50.67	≤-26	0.00857	≤2.5	PASS
				1000~2387	2386.65	-45.42	≤-26	0.02871	≤2.5	PASS
				2387~2400	2387.11	-37.73	≤-16	0.16866	≤25	PASS
				2483.5~2496.5	2483.57	-38.52	≤-16	0.14060	≤25	PASS
				2496.5~13000	4877.12	-40.97	≤-26	0.07998	≤2.5	PASS
			2472	30~1000	823.22	-51.33	≤-26	0.00736	≤2.5	PASS
				1000~2387	2360.99	-48.60	≤-26	0.01380	≤2.5	PASS
				2387~2400	2399.21	-38.79	≤-16	0.13213	≤25	PASS
				2483.5~2496.5	2483.5	-13.75	≤-16	42.1696 ₅	≤25	See table below
				2496.5~13000	2497.03	-38.35	≤-26	0.14622	≤2.5	PASS
	11N40SI SO	Ant1	2422	30~1000	917.79	-49.53	≤-26	0.01114	≤2.5	PASS
				1000~2387	2384.92	-30.13	≤-26	0.97051	≤2.5	PASS
				2387~2400	2399.93	-22.15	≤-16	6.09537	≤25	PASS
				2483.5~2496.5	2485.37	-36.22	≤-16	0.23878	≤25	PASS
				2496.5~13000	3624.05	-43.08	≤-26	0.04920	≤2.5	PASS
			2442	30~1000	931.62	-48.76	≤-26	0.01330	≤2.5	PASS

Dongguan DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



NTLV			2462	1000~2387	2387.00	-40.08	≤-26	0.09817	≤2.5	PASS
				2387~2400	2399.12	-32.96	≤-16	0.50582	≤25	PASS
				2483.5~2496.5	2485.30	-35.40	≤-16	0.28840	≤25	PASS
				2496.5~13000	3606.72	-42.09	≤-26	0.06180	≤2.5	PASS
				30~1000	950.53	-49.41	≤-26	0.01146	≤2.5	PASS
				1000~2387	2386.31	-41.94	≤-26	0.06397	≤2.5	PASS
				2387~2400	2399.48	-35.17	≤-16	0.30409	≤25	PASS
				2483.5~2496.5	2483.57	-21.02	≤-16	7.90679	≤25	PASS
				2496.5~13000	3617.22	-41.86	≤-26	0.06516	≤2.5	PASS
	11B	Ant1	2412	30~1000	910.28	-50.13	≤-26	0.00971	≤2.5	PASS
				1000~2387	2385.61	-43.26	≤-26	0.04721	≤2.5	PASS
				2387~2400	2397.35	-25.63	≤-16	2.73527	≤25	PASS
				2483.5~2496.5	2492.85	-37.89	≤-16	0.16255	≤25	PASS
				2496.5~13000	4824.08	-41.81	≤-26	0.06592	≤2.5	PASS
			2442	30~1000	977.45	-49.34	≤-26	0.01164	≤2.5	PASS
				1000~2387	2368.97	-46.27	≤-26	0.02360	≤2.5	PASS
				2387~2400	2391.43	-37.44	≤-16	0.18030	≤25	PASS
				2483.5~2496.5	2484.36	-37.12	≤-16	0.19409	≤25	PASS
				2496.5~13000	4883.95	-41.31	≤-26	0.07396	≤2.5	PASS
			2472	30~1000	879.96	-49.42	≤-26	0.01143	≤2.5	PASS
				1000~2387	1922.36	-44.55	≤-26	0.03508	≤2.5	PASS
				2387~2400	2388.38	-37.47	≤-16	0.17906	≤25	PASS
				2483.5~2496.5	2485.83	-28.65	≤-16	1.36458	≤25	PASS
				2496.5~13000	4943.82	-43.00	≤-26	0.05012	≤2.5	PASS
	11G	Ant1	2412	30~1000	852.32	-49.25	≤-26	0.01189	≤2.5	PASS
				1000~2387	2386.31	-37.62	≤-26	0.17298	≤2.5	PASS
				2387~2400	2399.94	-17.58	≤-16	17.4582 2	≤25	See table below
				2483.5~2496.5	2495.54	-37.35	≤-16	0.18408	≤25	PASS
				2496.5~13000	4830.38	-40.90	≤-26	0.08128	≤2.5	PASS
			2442	30~1000	838.74	-49.85	≤-26	0.01035	≤2.5	PASS
				1000~2387	2387.00	-43.73	≤-26	0.04236	≤2.5	PASS
				2387~2400	2396.31	-37.01	≤-16	0.19907	≤25	PASS
				2483.5~2496.5	2483.60	-37.42	≤-16	0.18113	≤25	PASS
				2496.5~13000	4877.64	-39.97	≤-26	0.10069	≤2.5	PASS
			2472	30~1000	932.59	-50.21	≤-26	0.00953	≤2.5	PASS
				1000~2387	2371.05	-48.40	≤-26	0.01445	≤2.5	PASS
				2387~2400	2388.86	-39.20	≤-16	0.12023	≤25	PASS
				2483.5~2496.5	2484.83	-15.67	≤-16	27.1019 2	≤25	See table below
				2496.5~13000	2499.13	-38.48	≤-26	0.14191	≤2.5	PASS
	11N20SI SO	Ant1	2412	30~1000	753.38	-51.41	≤-26	0.00723	≤2.5	PASS
				1000~2387	2385.96	-37.14	≤-26	0.19320	≤2.5	PASS
				2387~2400	2399.91	-14.17	≤-16	38.2824 7	≤25	See table below
				2483.5~2496.5	2489.79	-39.39	≤-16	0.11508	≤25	PASS
				2496.5~13000	4825.13	-40.34	≤-26	0.09247	≤2.5	PASS
			2442	30~1000	893.54	-51.13	≤-26	0.00771	≤2.5	PASS
				1000~2387	2384.23	-46.50	≤-26	0.02239	≤2.5	PASS
				2387~2400	2399.27	-38.54	≤-16	0.13996	≤25	PASS
				2483.5~2496.5	2484.49	-38.68	≤-16	0.13552	≤25	PASS
				2496.5~13000	4886.05	-41.35	≤-26	0.07328	≤2.5	PASS
			2472	30~1000	812.06	-51.74	≤-26	0.00670	≤2.5	PASS
				1000~2387	2302.39	-48.89	≤-26	0.01291	≤2.5	PASS
				2387~2400	2390.74	-38.63	≤-16	0.13709	≤25	PASS
				2483.5~2496.5	2483.52	-13.81	≤-16	41.5910 6	≤25	See table below
				2496.5~13000	3642.96	-45.04	≤-26	0.03133	≤2.5	PASS
	11N40SI SO	Ant1	2422	30~1000	908.82	-49.27	≤-26	0.01183	≤2.5	PASS
				1000~2387	2384.92	-30.75	≤-26	0.84140	≤2.5	PASS



NTHV	11B	Ant1	2442	2387~2400	2399.96	-21.82	≤-16	6.57658	≤25	PASS
				2483.5~2496.5	2488.37	-36.09	≤-16	0.24604	≤25	PASS
				2496.5~13000	5310.39	-43.49	≤-26	0.04477	≤2.5	PASS
				30~1000	826.37	-49.11	≤-26	0.01227	≤2.5	PASS
				1000~2387	2376.94	-38.92	≤-26	0.12823	≤2.5	PASS
				2387~2400	2398.02	-33.24	≤-16	0.47424	≤25	PASS
				2483.5~2496.5	2485.67	-35.33	≤-16	0.29309	≤25	PASS
				2496.5~13000	4862.41	-41.99	≤-26	0.06324	≤2.5	PASS
			2462	30~1000	792.18	-49.06	≤-26	0.01242	≤2.5	PASS
				1000~2387	2384.57	-43.45	≤-26	0.04519	≤2.5	PASS
				2387~2400	2397.01	-35.08	≤-16	0.31046	≤25	PASS
				2483.5~2496.5	2483.55	-20.87	≤-16	8.18465	≤25	PASS
				2496.5~13000	2504.38	-42.53	≤-26	0.05585	≤2.5	PASS
				30~1000	903.24	-50.01	≤-26	0.00998	≤2.5	PASS
	11G	Ant1	2412	1000~2387	2386.65	-42.10	≤-26	0.06166	≤2.5	PASS
				2387~2400	2397.15	-25.32	≤-16	2.93765	≤25	PASS
				2483.5~2496.5	2495.14	-37.78	≤-16	0.16672	≤25	PASS
				2496.5~13000	4824.08	-42.38	≤-26	0.05781	≤2.5	PASS
				30~1000	904.70	-50.04	≤-26	0.00991	≤2.5	PASS
			2442	1000~2387	2330.13	-45.34	≤-26	0.02924	≤2.5	PASS
				2387~2400	2387.88	-37.05	≤-16	0.19724	≤25	PASS
				2483.5~2496.5	2483.80	-37.50	≤-16	0.17783	≤25	PASS
				2496.5~13000	4883.95	-41.23	≤-26	0.07534	≤2.5	PASS
				30~1000	882.63	-50.25	≤-26	0.00944	≤2.5	PASS
			2472	1000~2387	1923.40	-43.55	≤-26	0.04416	≤2.5	PASS
				2387~2400	2396.37	-37.38	≤-16	0.18281	≤25	PASS
				2483.5~2496.5	2486.05	-28.58	≤-16	1.38676	≤25	PASS
				2496.5~13000	5314.59	-43.20	≤-26	0.04786	≤2.5	PASS
				30~1000	890.15	-49.29	≤-26	0.01178	≤2.5	PASS
			2412	1000~2387	2384.92	-37.92	≤-26	0.16144	≤2.5	PASS
				2387~2400	2399.98	-17.53	≤-16	17.6603 8	≤25	See table below
				2483.5~2496.5	2485.66	-36.94	≤-16	0.20230	≤25	PASS
				2496.5~13000	4823.55	-41.45	≤-26	0.07161	≤2.5	PASS
				30~1000	852.32	-50.03	≤-26	0.00993	≤2.5	PASS
			2442	1000~2387	2372.09	-45.29	≤-26	0.02958	≤2.5	PASS
				2387~2400	2395.75	-36.80	≤-16	0.20893	≤25	PASS
				2483.5~2496.5	2484.32	-37.11	≤-16	0.19454	≤25	PASS
				2496.5~13000	4884.47	-41.04	≤-26	0.07870	≤2.5	PASS
				30~1000	855.96	-51.55	≤-26	0.00700	≤2.5	PASS
			2472	1000~2387	1716.39	-47.47	≤-26	0.01791	≤2.5	PASS
				2387~2400	2399.36	-38.92	≤-16	0.12823	≤25	PASS
				2483.5~2496.5	2484.78	-15.80	≤-16	26.3026 8	≤25	See table below
				2496.5~13000	2499.13	-38.11	≤-26	0.15453	≤2.5	PASS
				30~1000	681.36	-51.79	≤-26	0.00662	≤2.5	PASS
	11N20SI SO	Ant1	2412	1000~2387	2387.00	-35.82	≤-26	0.26182	≤2.5	PASS
				2387~2400	2399.89	-14.35	≤-16	36.7282 3	≤25	See table below
				2483.5~2496.5	2490.42	-39.04	≤-16	0.12474	≤25	PASS
				2496.5~13000	4832.48	-44.94	≤-26	0.03206	≤2.5	PASS
				30~1000	947.62	-50.93	≤-26	0.00807	≤2.5	PASS
			2442	1000~2387	2385.61	-46.07	≤-26	0.02472	≤2.5	PASS
				2387~2400	2396.74	-37.64	≤-16	0.17219	≤25	PASS
				2483.5~2496.5	2484.52	-37.31	≤-16	0.18578	≤25	PASS
				2496.5~13000	4881.32	-40.91	≤-26	0.08110	≤2.5	PASS
				30~1000	868.08	-50.84	≤-26	0.00824	≤2.5	PASS
			2472	1000~2387	2165.43	-48.49	≤-26	0.01416	≤2.5	PASS
				2387~2400	2396.55	-39.00	≤-16	0.12589	≤25	PASS
				2483.5~2496.5	2483.52	-13.73	≤-16	42.3643 0	≤25	See table




11N40SI SO	Ant1	2422								below
			2496.5~13000	5300.93	-45.50	≤-26	0.02818	≤2.5	PASS	
			30~1000	876.57	-49.29	≤-26	0.01178	≤2.5	PASS	
			1000~2387	2385.61	-30.27	≤-26	0.93972	≤2.5	PASS	
			2387~2400	2399.95	-21.94	≤-16	6.39735	≤25	PASS	
		2442	2483.5~2496.5	2485.39	-35.64	≤-16	0.27290	≤25	PASS	
			2496.5~13000	4750.03	-43.08	≤-26	0.04920	≤2.5	PASS	
			30~1000	868.57	-49.18	≤-26	0.01208	≤2.5	PASS	
			1000~2387	2386.31	-39.96	≤-26	0.10093	≤2.5	PASS	
			2387~2400	2397.73	-32.74	≤-16	0.53211	≤25	PASS	
		2462	2483.5~2496.5	2488.21	-35.11	≤-16	0.30832	≤25	PASS	
			2496.5~13000	3619.32	-42.52	≤-26	0.05598	≤2.5	PASS	
			30~1000	955.87	-49.23	≤-26	0.01194	≤2.5	PASS	
			1000~2387	2386.65	-41.97	≤-26	0.06353	≤2.5	PASS	
			2387~2400	2397.28	-35.06	≤-16	0.31189	≤25	PASS	
			2483.5~2496.5	2483.60	-20.98	≤-16	7.97995	≤25	PASS	
			2496.5~13000	2497.55	-39.67	≤-26	0.10789	≤2.5	PASS	

Test Result 2

TestCondition	TestMode	PreScan In Ant	Channel	Ant	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [μW]	Limit [μW]	Verdict
NTNV	11G	Ant1	2412	Ant1	2400.00	-31.10	≤-16	0.77625	≤25	PASS
			2472	Ant1	2484.79	-31.67	≤-16	0.68077	≤25	PASS
	11N20SI SO	Ant1	2412	Ant1	2399.97	-31.50	≤-16	0.70795	≤25	PASS
			2472	Ant1	2483.52	-29.93	≤-16	1.01625	≤25	PASS
NTLV	11G	Ant1	2412	Ant1	2399.99	-31.11	≤-16	0.77446	≤25	PASS
			2472	Ant1	2484.84	-31.81	≤-16	0.65917	≤25	PASS
	11N20SI SO	Ant1	2412	Ant1	2399.98	-31.47	≤-16	0.71285	≤25	PASS
			2472	Ant1	2483.51	-29.88	≤-16	1.02802	≤25	PASS
NTHV	11G	Ant1	2412	Ant1	2399.99	-31.12	≤-16	0.77268	≤25	PASS
			2472	Ant1	2484.81	-31.77	≤-16	0.66527	≤25	PASS
	11N20SI SO	Ant1	2412	Ant1	2399.96	-31.52	≤-16	0.70469	≤25	PASS
			2472	Ant1	2483.51	-29.90	≤-16	1.02329	≤25	PASS




Test Graphs 1

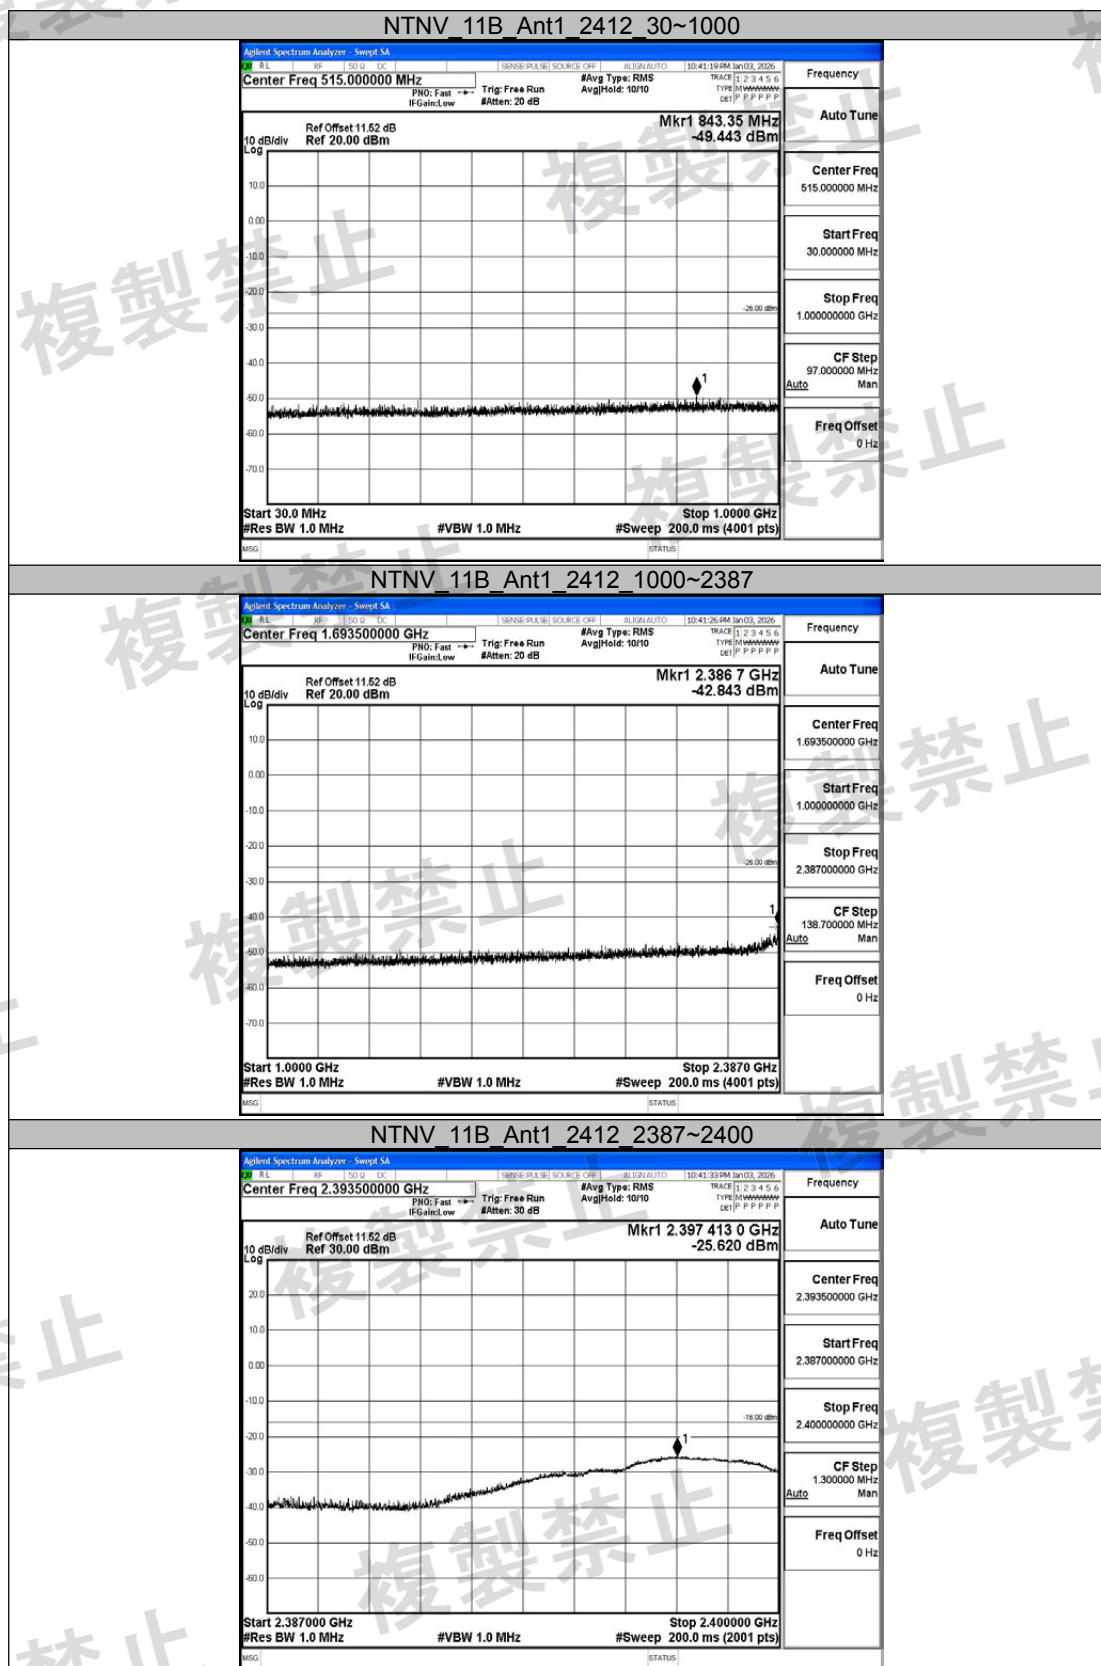





NTNV_11B_Ant1_2412_2483.5~2496.5

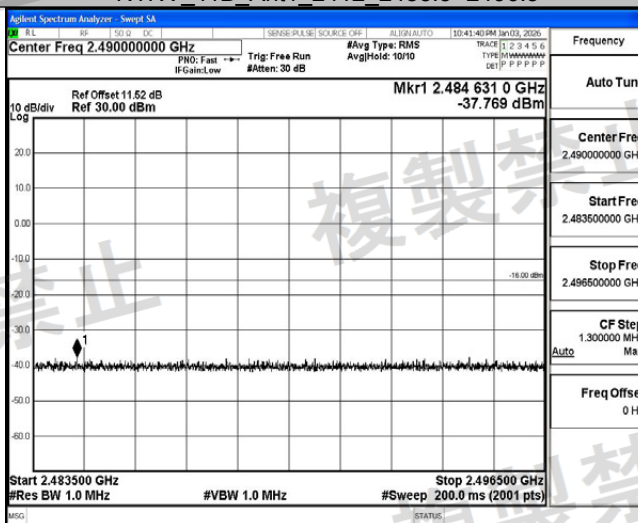

NTNV_11B_Ant1_2412_2496.5~13000

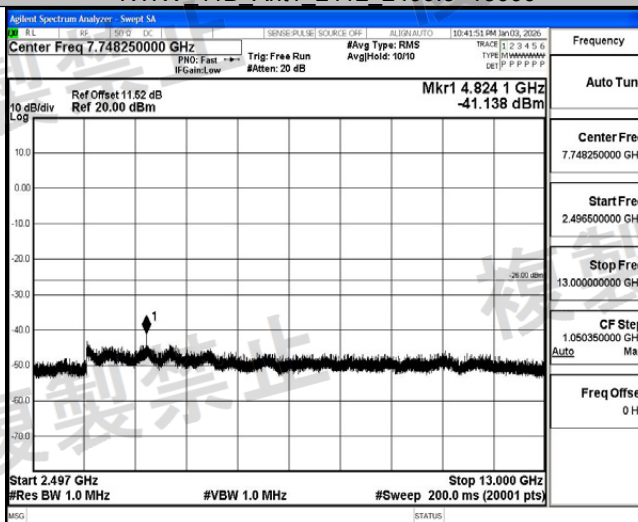


NTNV_11B_Ant1_2442_30~1000

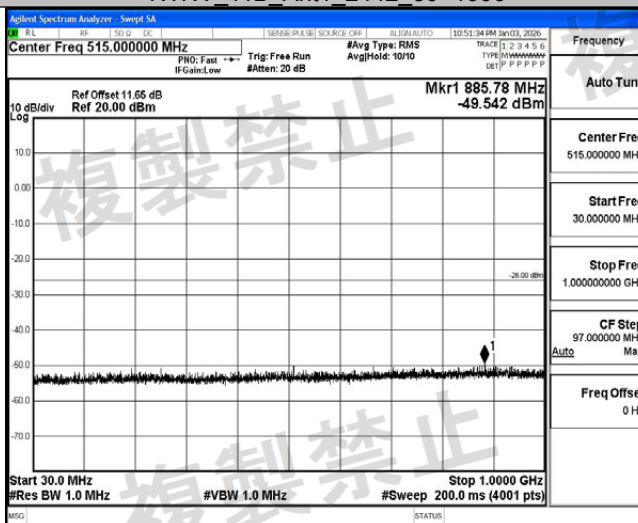





NTNV 11B Ant1 2442 1000~2387

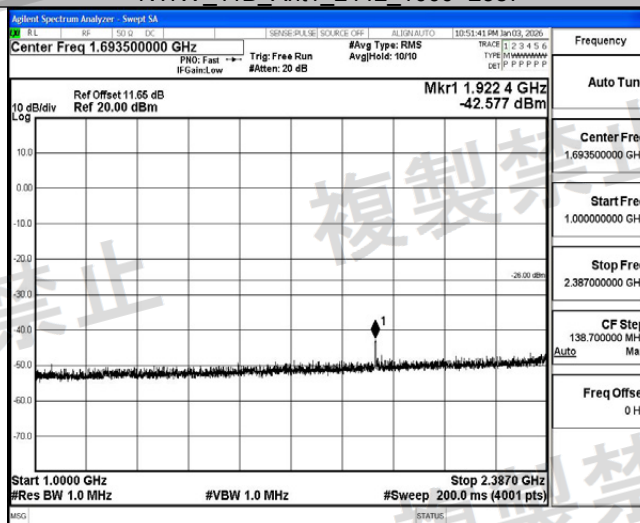

NTNV 11B Ant1 2442 2387~2400

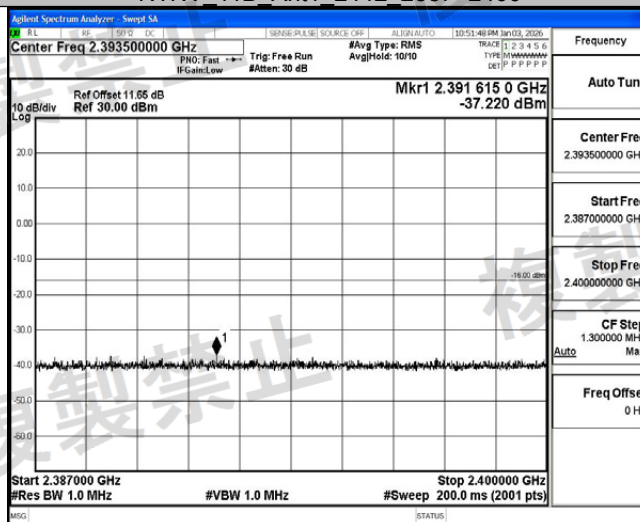


NTNV 11B Ant1 2442 2483.5~2496.5

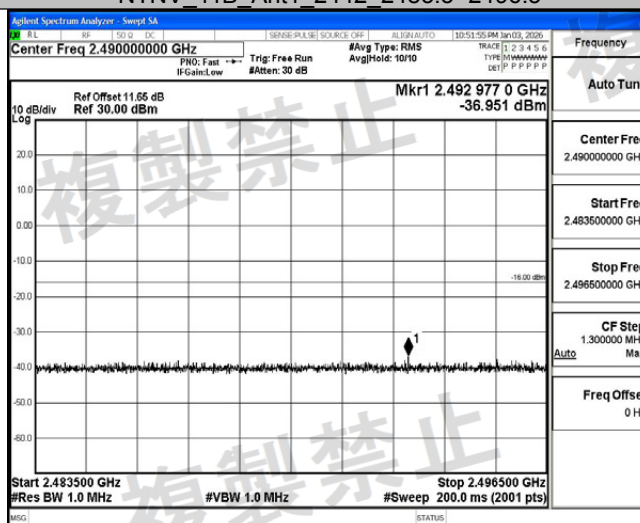





NTNV 11B Ant1 2442 2496.5~13000

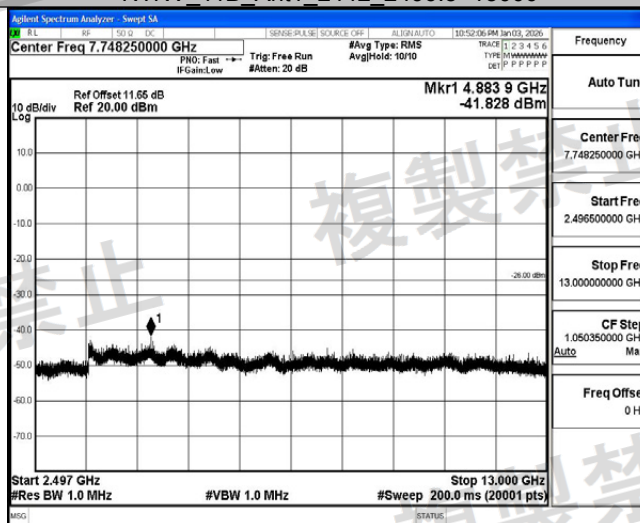

NTNV 11B Ant1 2472 30~1000

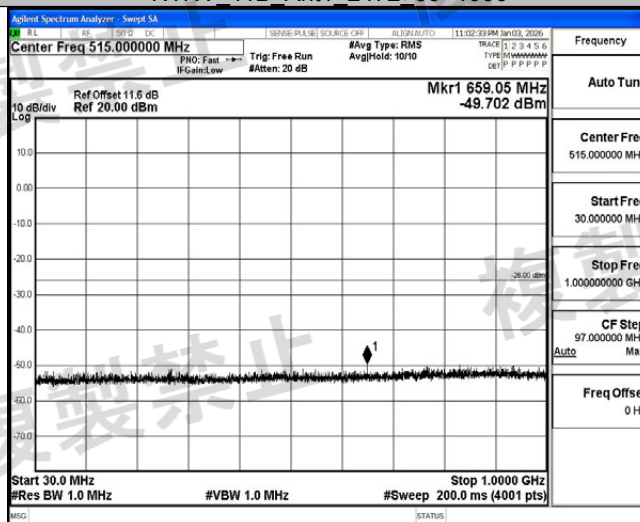


NTNV 11B Ant1 2472 1000~2387

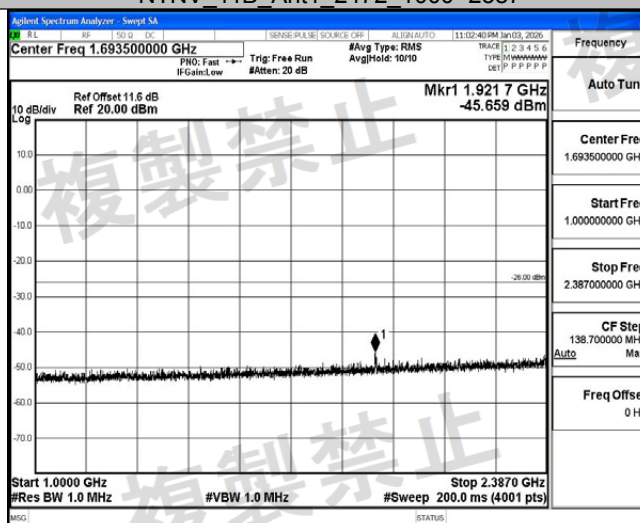





NTNV 11B Ant1 2472 2387~2400

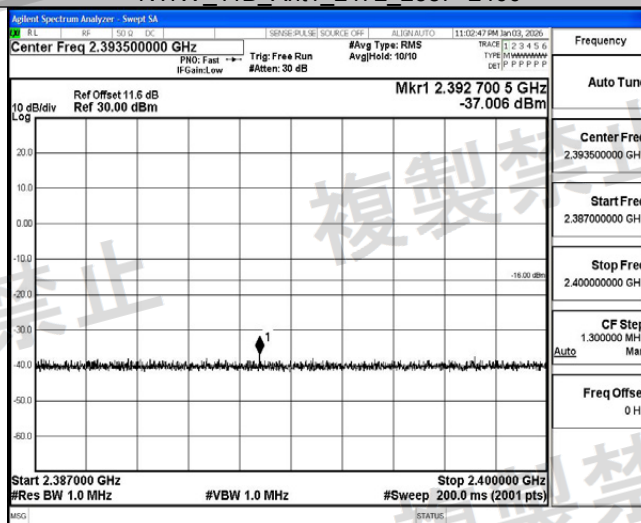

NTNV 11B Ant1 2472 2483.5~2496.5

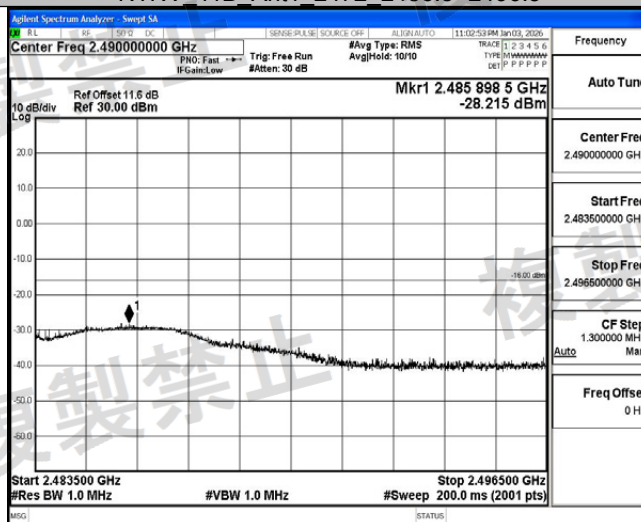


NTNV 11B Ant1 2472 2496.5~13000

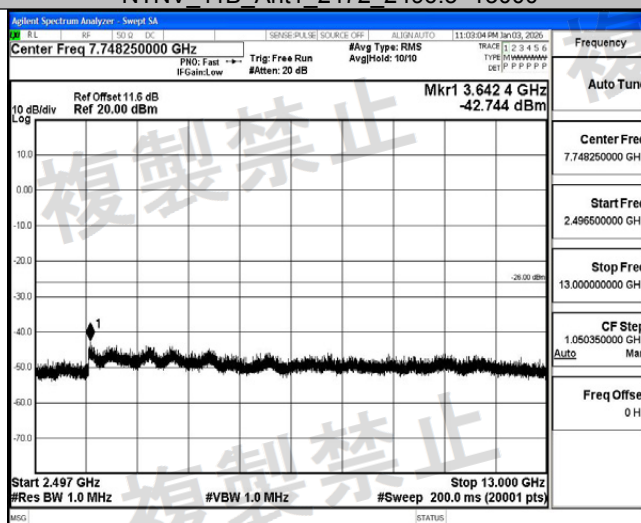





NTNV 11G Ant1 2412 30~1000

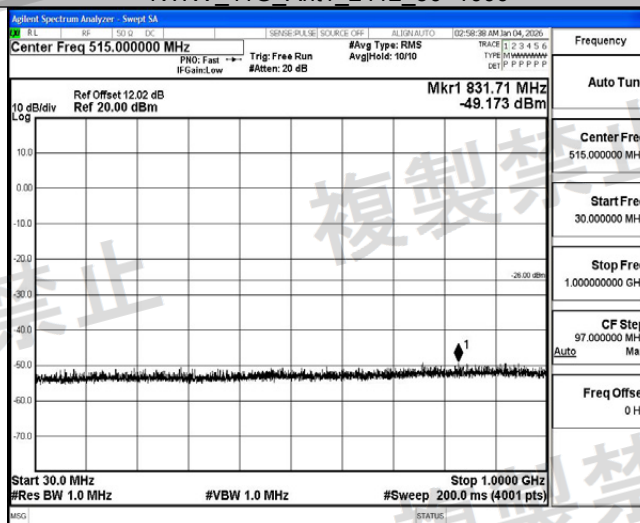

NTNV 11G Ant1 2412 1000~2387

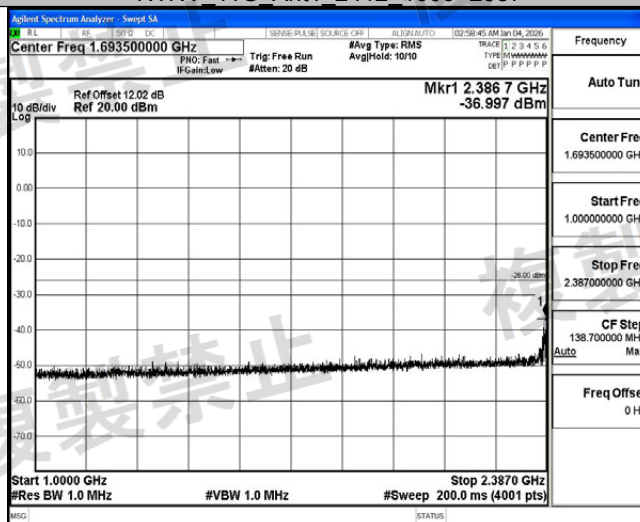


NTNV 11G Ant1 2412 2387~2400

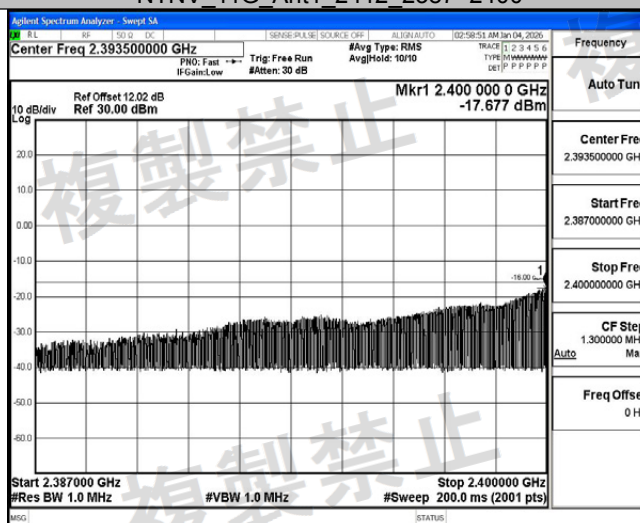





NTNV_11G_Ant1_2412_2483.5~2496.5

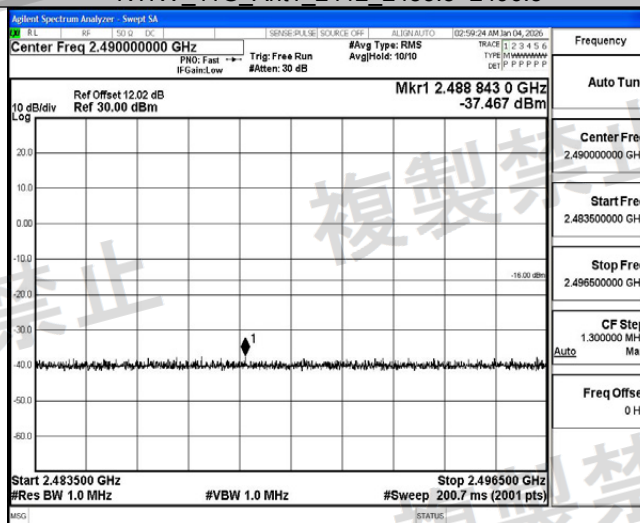

NTNV_11G_Ant1_2412_2496.5~13000

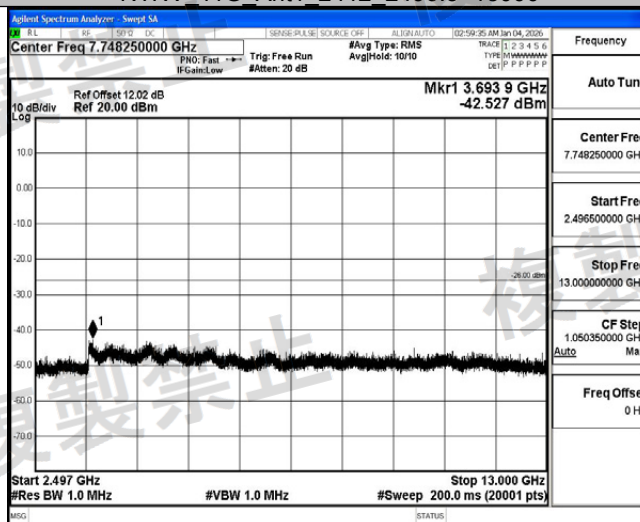


NTNV_11G_Ant1_2442_30~1000

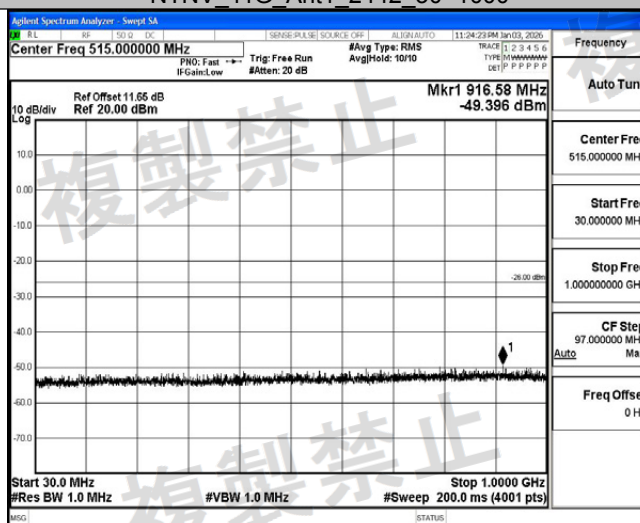





NTNV_11G_Ant1_2442_1000~2387

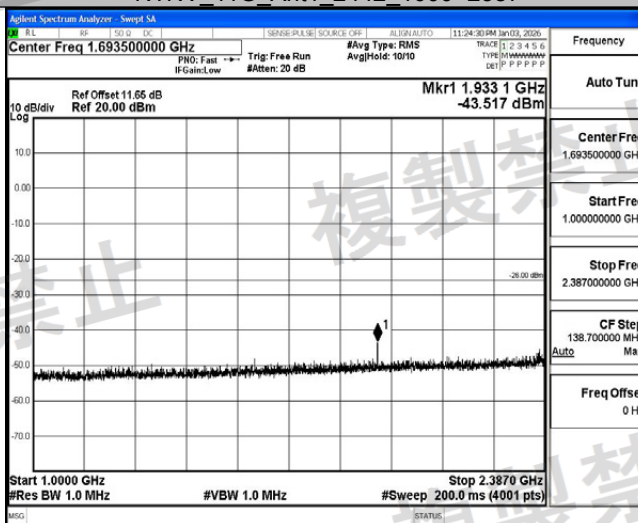

NTNV_11G_Ant1_2442_2387~2400

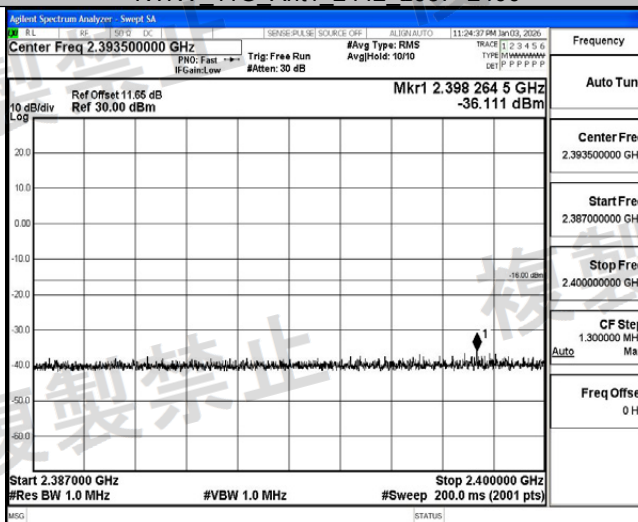


NTNV_11G_Ant1_2442_2483.5~2496.5

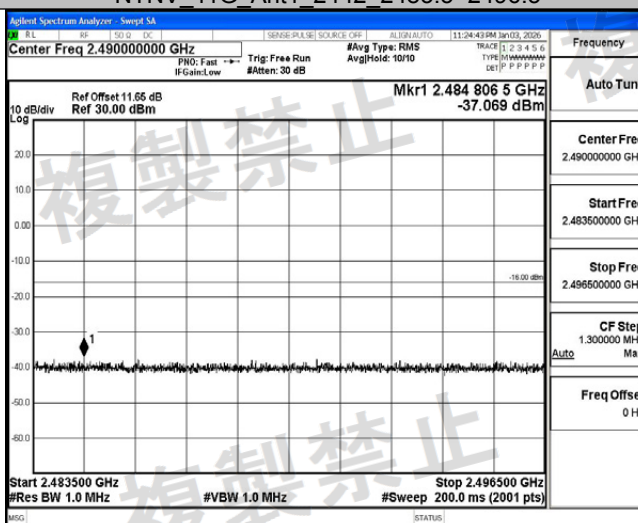





NTNV_11G_Ant1_2442_2496.5~13000

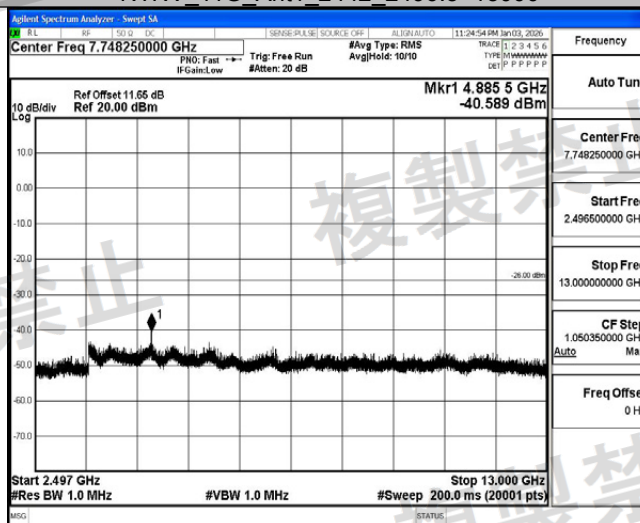

NTNV_11G_Ant1_2472_30~1000

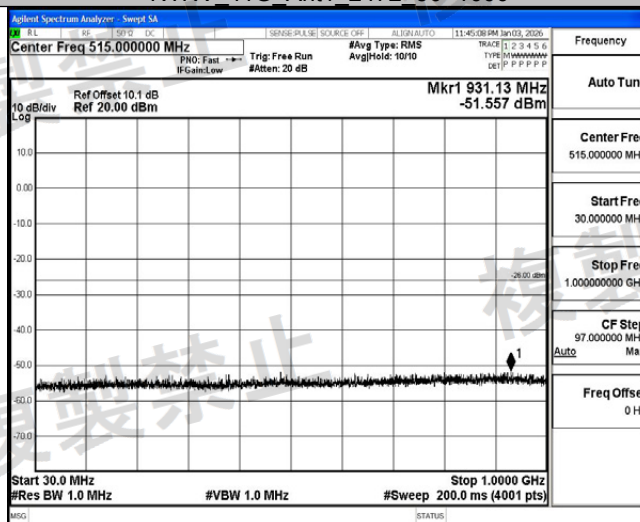


NTNV_11G_Ant1_2472_1000~2387

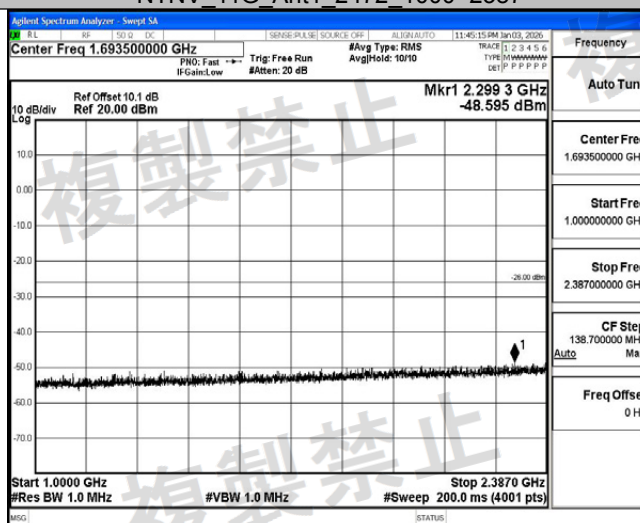





NTNV_11G_Ant1_2472_2387~2400

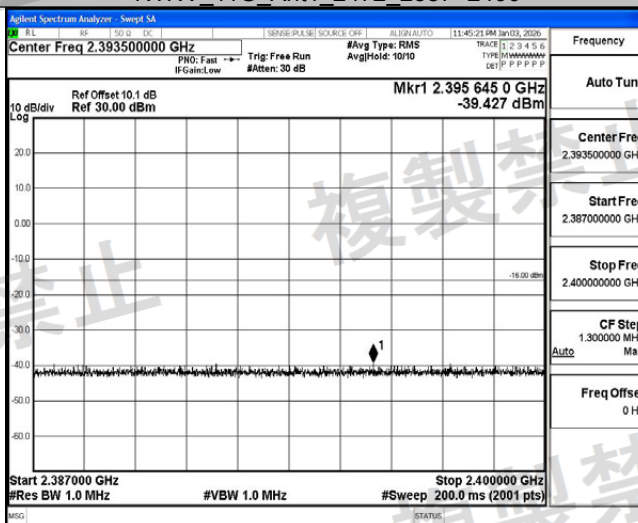

NTNV_11G_Ant1_2472_2483.5~2496.5

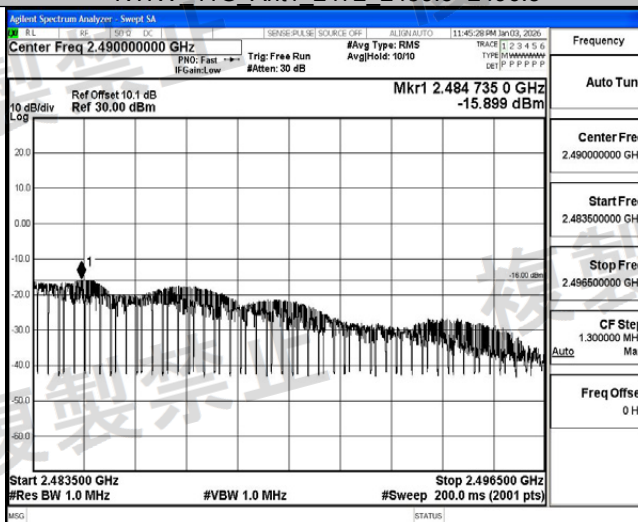


NTNV_11G_Ant1_2472_2496.5~13000

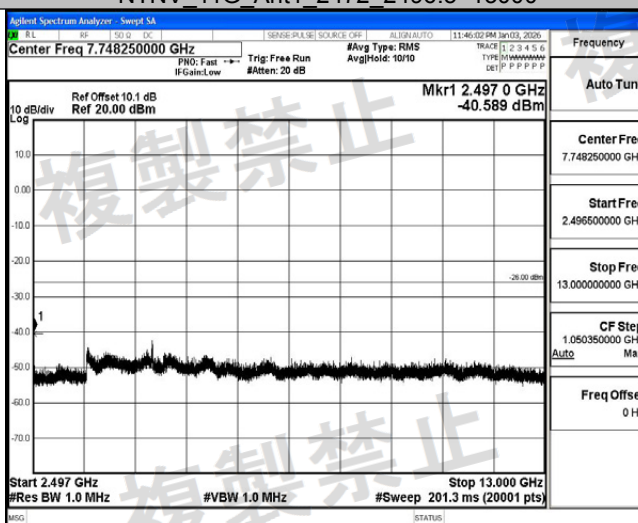





NTNV 11N20SISO Ant1 2412 30~1000

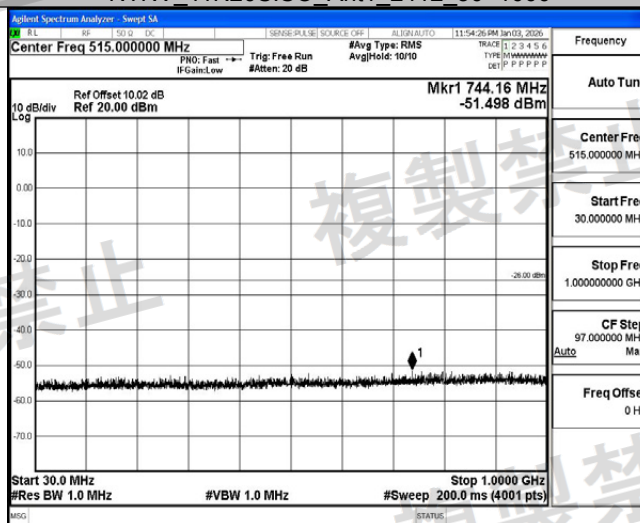

NTNV 11N20SISO Ant1 2412 1000~2387

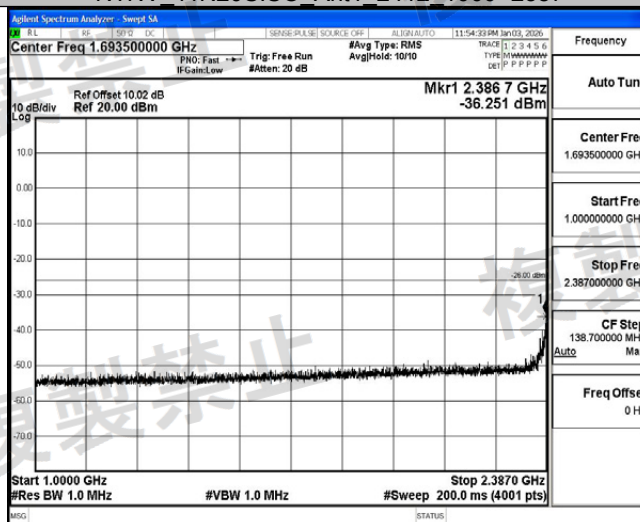


NTNV 11N20SISO Ant1 2412 2387~2400

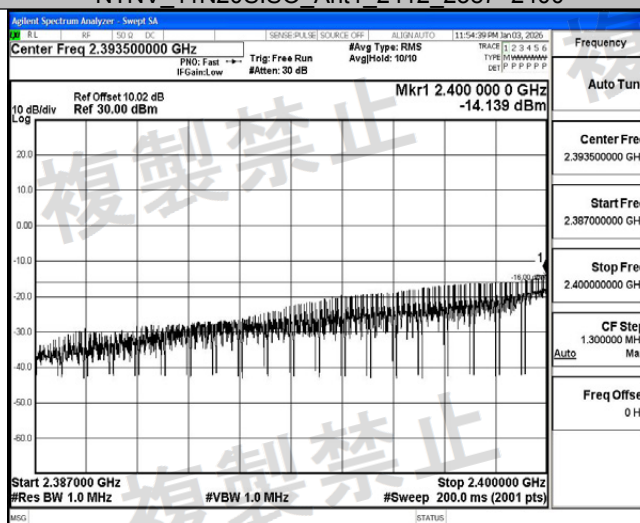





NTNV 11N20SISO Ant1 2412 2483.5~2496.5

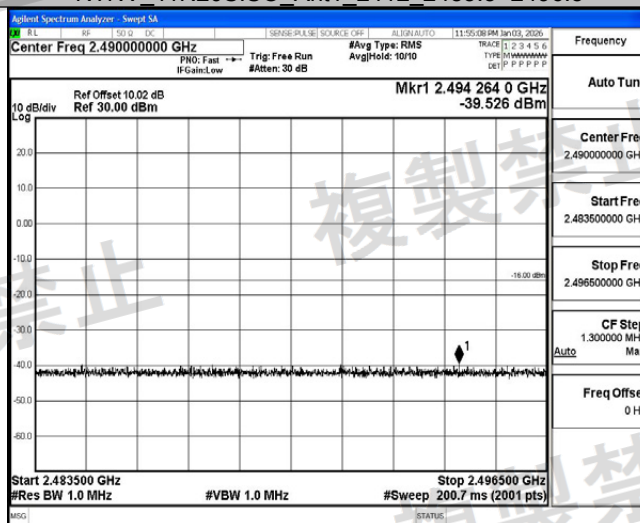

NTNV 11N20SISO Ant1 2412 2496.5~13000

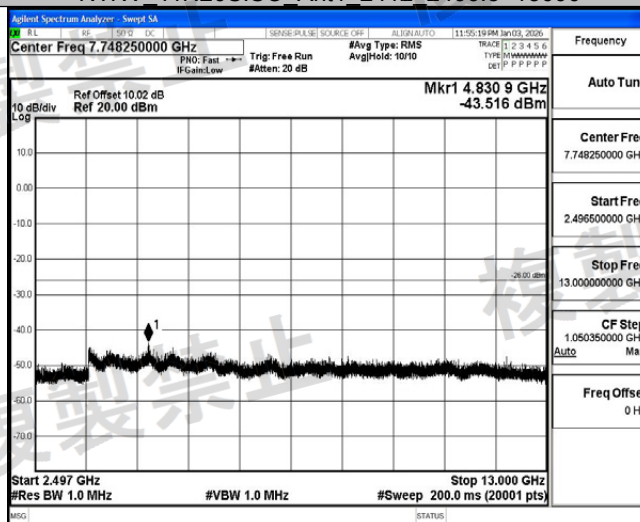


NTNV 11N20SISO Ant1 2442 30~1000

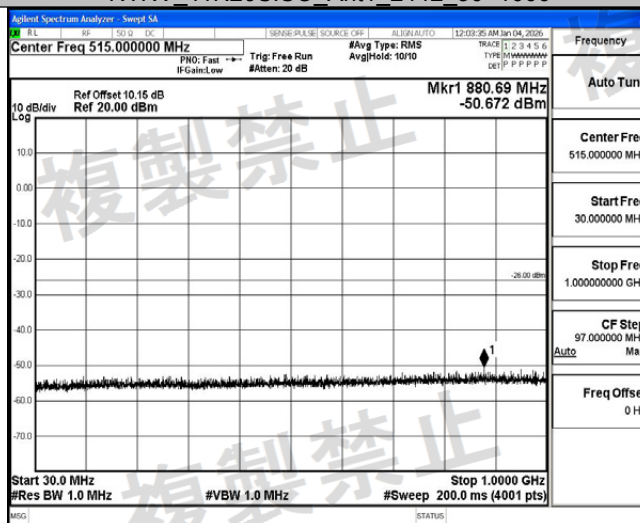





NTNV 11N20SISO Ant1 2442 1000~2387

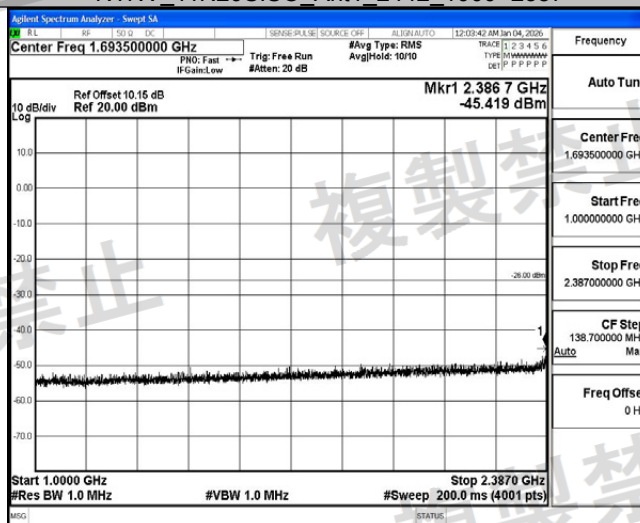

NTNV 11N20SISO Ant1 2442 2387~2400

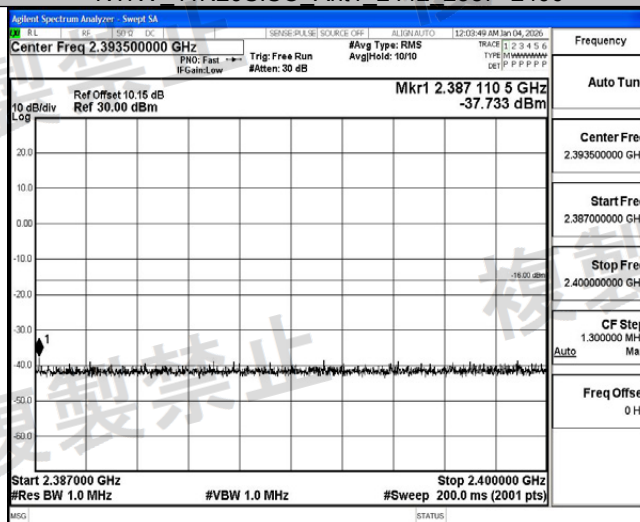


NTNV 11N20SISO Ant1 2442 2483.5~2496.5

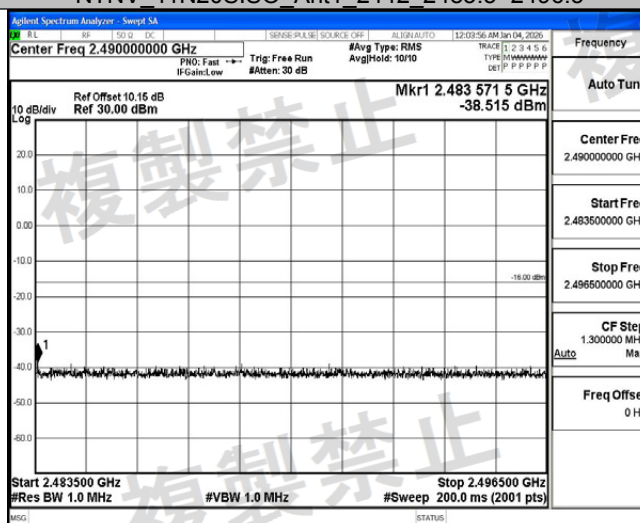





NTNV 11N20SISO Ant1 2442 2496.5~13000

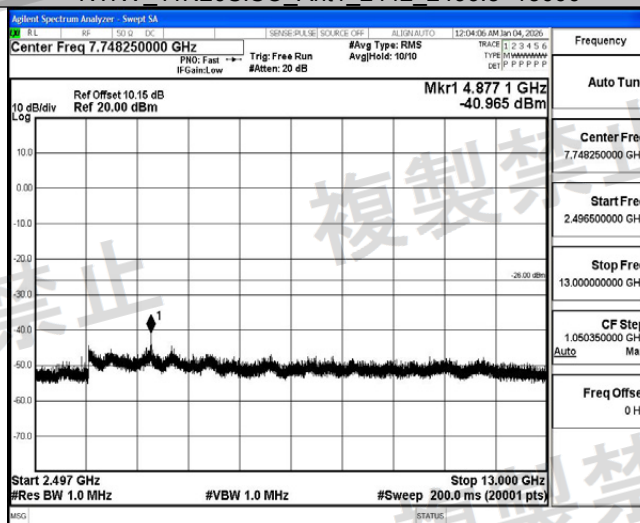

NTNV 11N20SISO Ant1 2472 30~1000

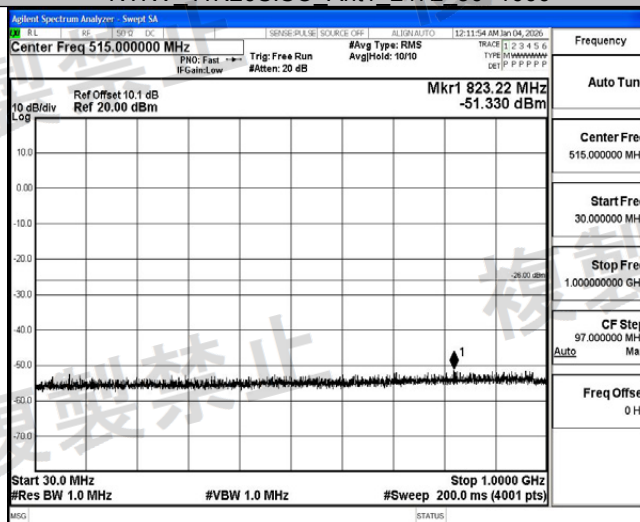


NTNV 11N20SISO Ant1 2472 1000~2387

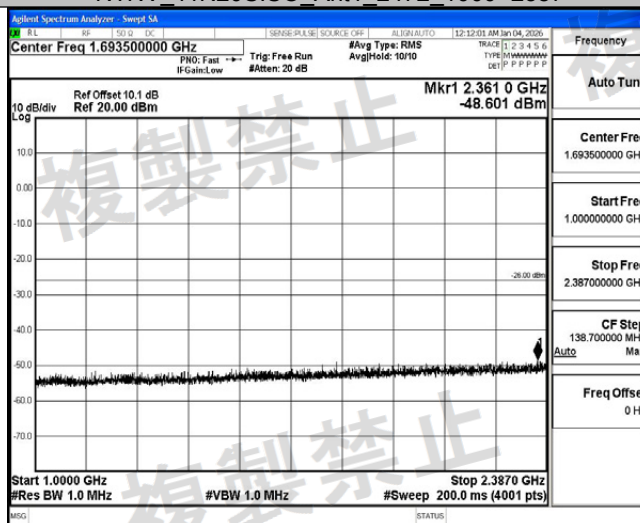







NTNV 11N40SISO Ant1 2422 30~1000

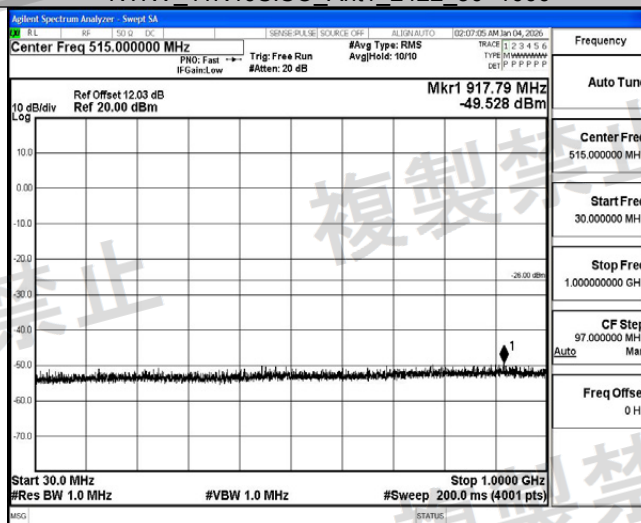

NTNV 11N40SISO Ant1 2422 1000~2387

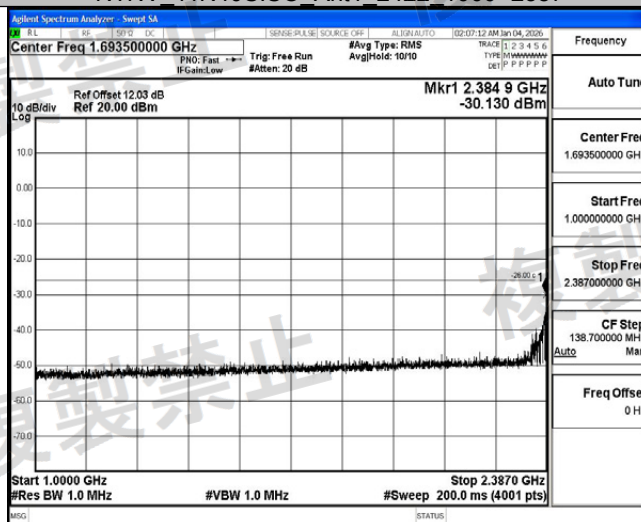


NTNV 11N40SISO Ant1 2422 2387~2400

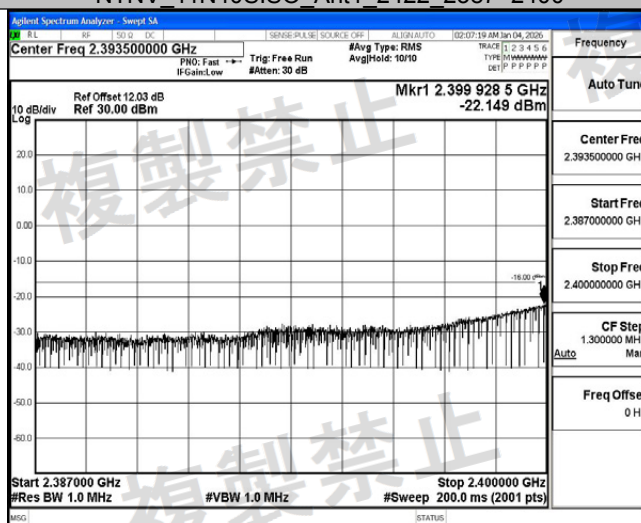





NTNV 11N40SISO Ant1 2422 2483.5~2496.5

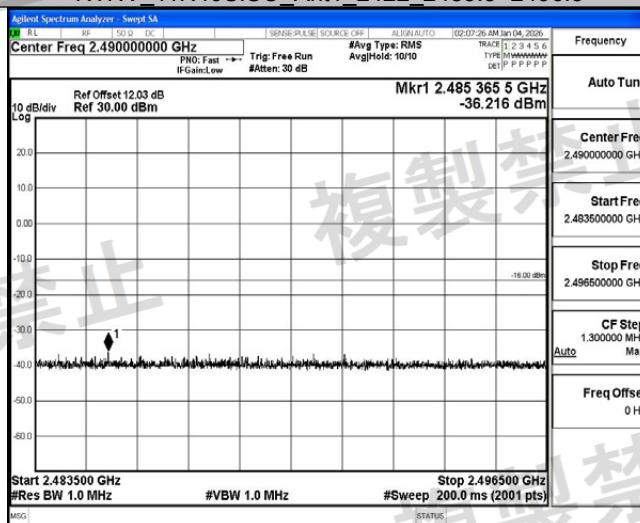

NTNV 11N40SISO Ant1 2422 2496.5~13000

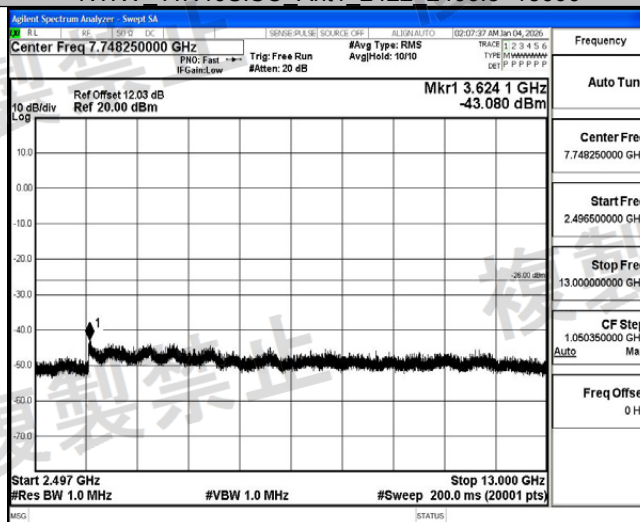


NTNV 11N40SISO Ant1 2442 30~1000

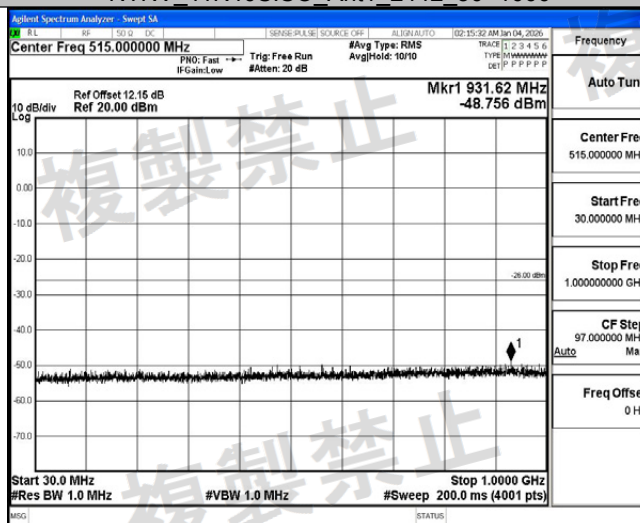





NTNV 11N40SISO Ant1 2442 1000~2387

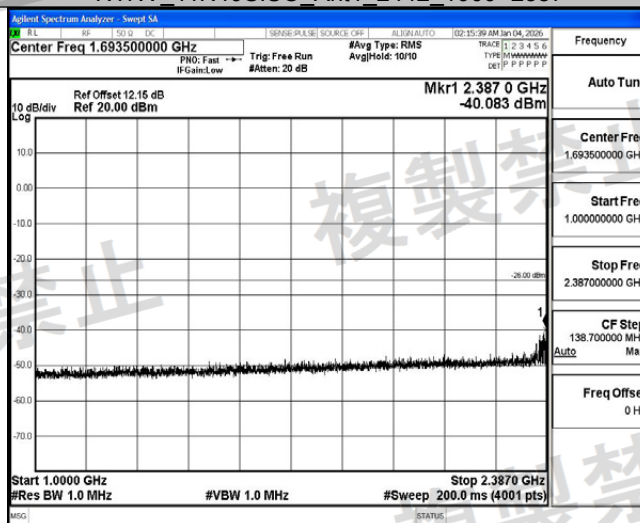

NTNV 11N40SISO Ant1 2442 2387~2400

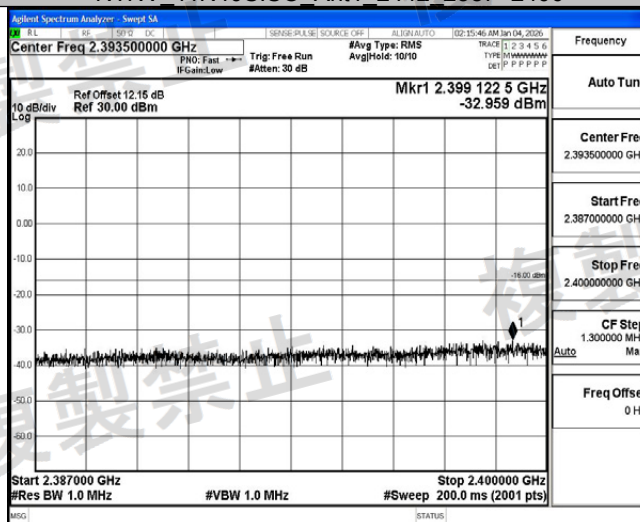


NTNV 11N40SISO Ant1 2442 2483.5~2496.5

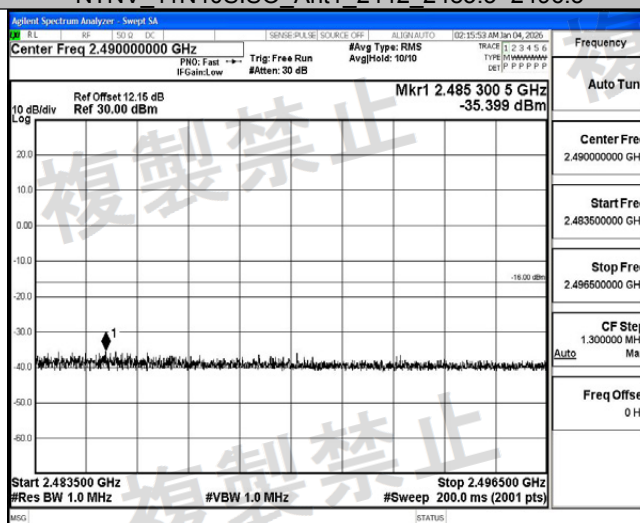





NTNV 11N40SISO Ant1 2442 2496.5~13000

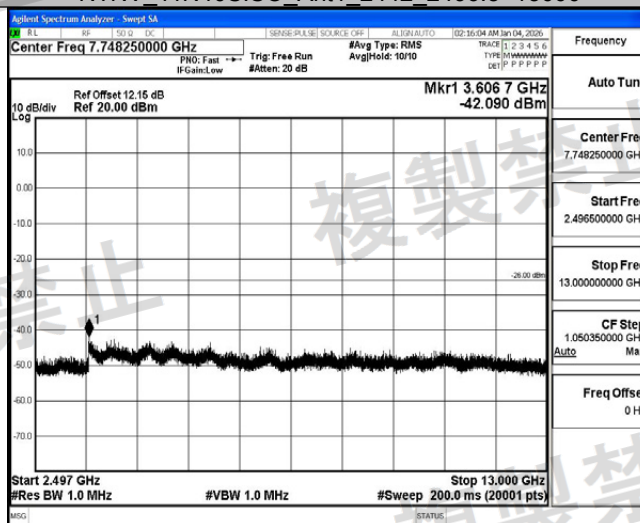

NTNV 11N40SISO Ant1 2462 30~1000

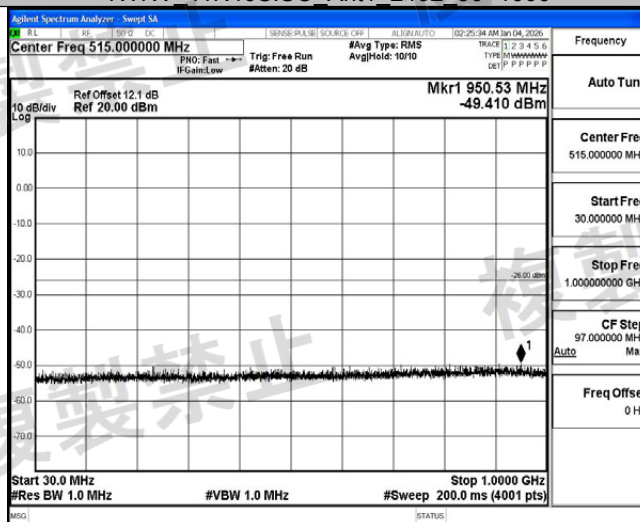


NTNV 11N40SISO Ant1 2462 1000~2387

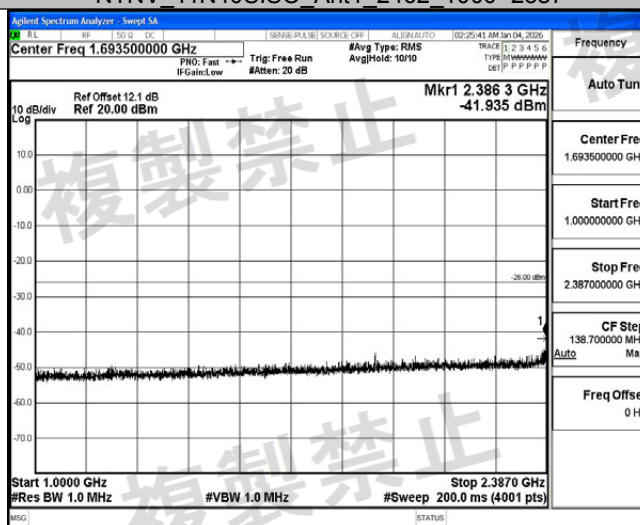





NTNV 11N40SISO Ant1 2462 2387~2400

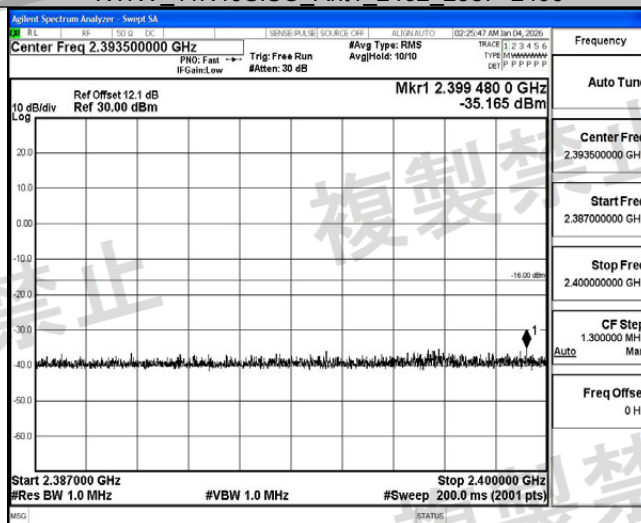

NTNV 11N40SISO Ant1 2462 2483.5~2496.5

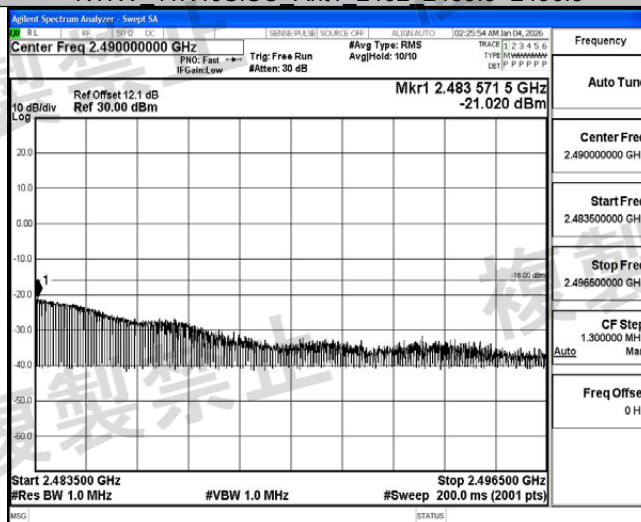


NTNV 11N40SISO Ant1 2462 2496.5~13000

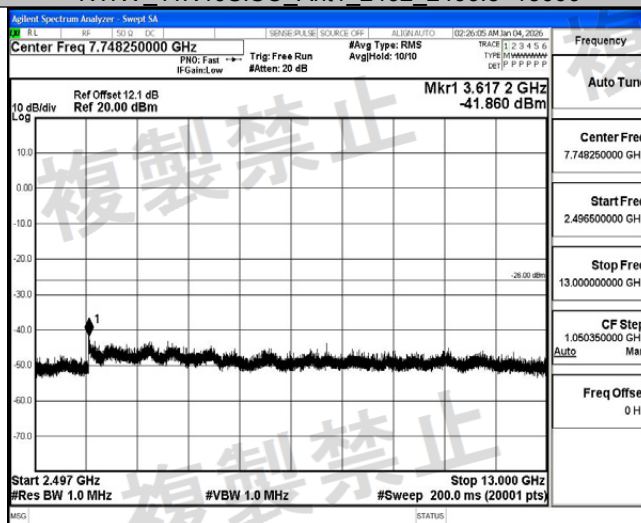





NTLV 11B Ant1 2412 30~1000

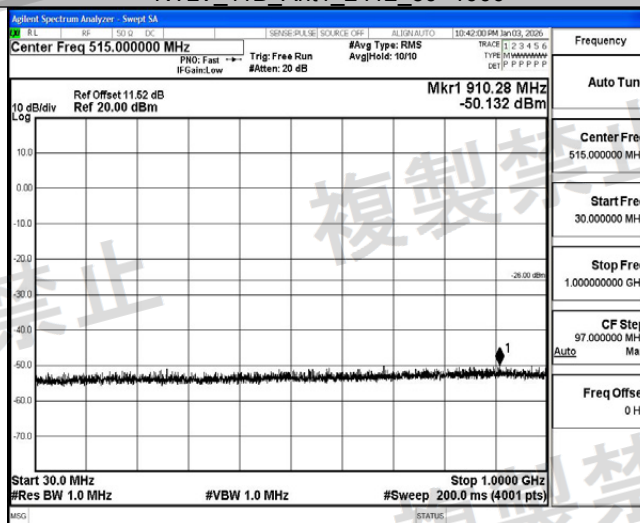

NTLV 11B Ant1 2412 1000~2387

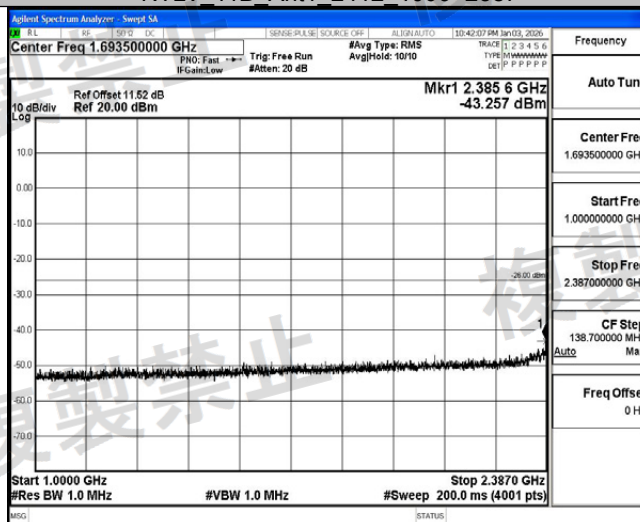


NTLV 11B Ant1 2412 2387~2400

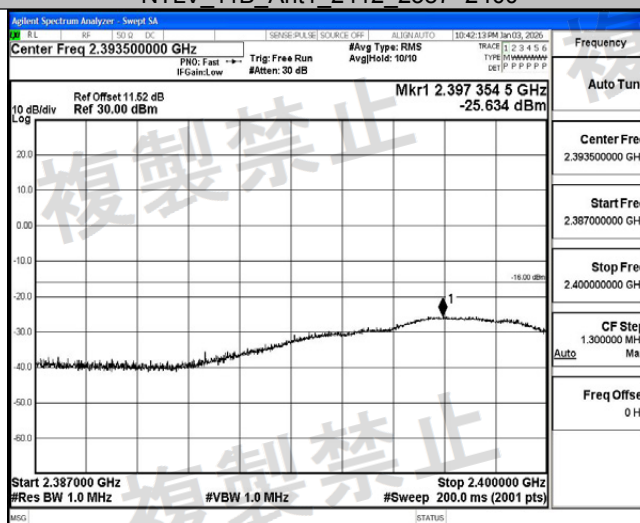





NTLV_11B_Ant1_2412_2483.5~2496.5

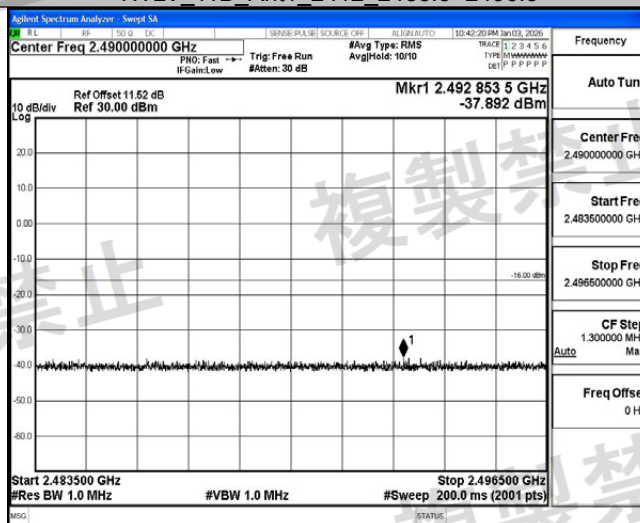

NTLV_11B_Ant1_2412_2496.5~13000

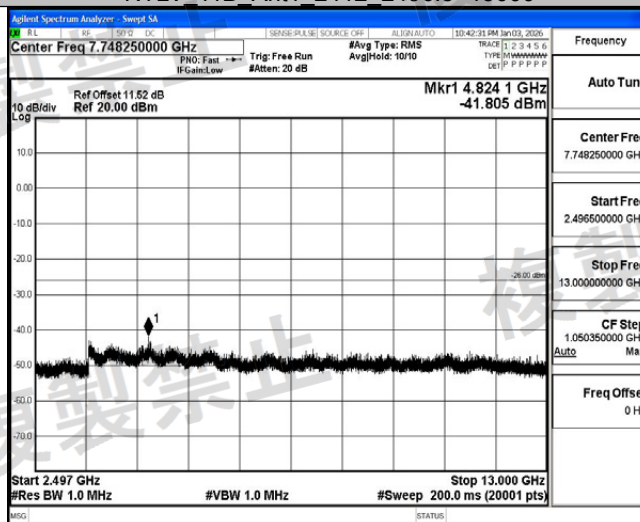


NTLV_11B_Ant1_2442_30~1000

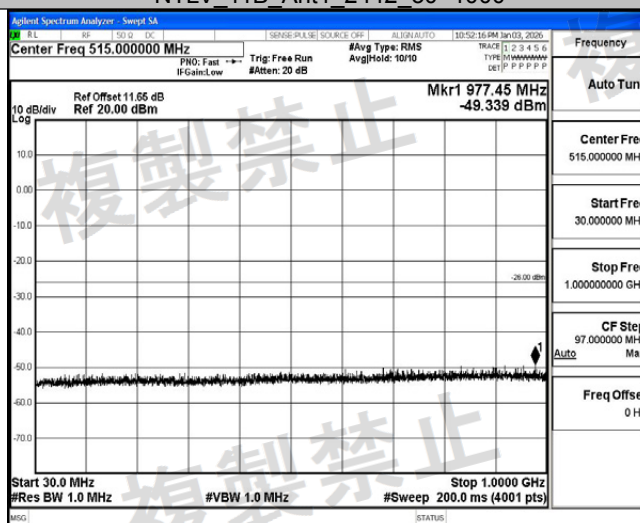





NTLV 11B Ant1 2442 1000~2387

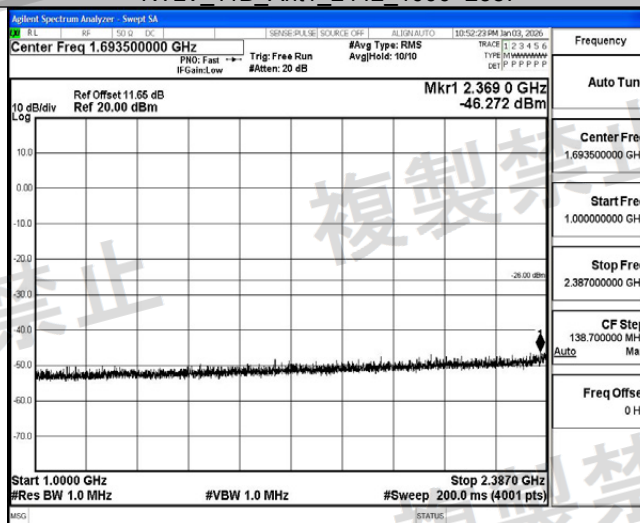

NTLV 11B Ant1 2442 2387~2400

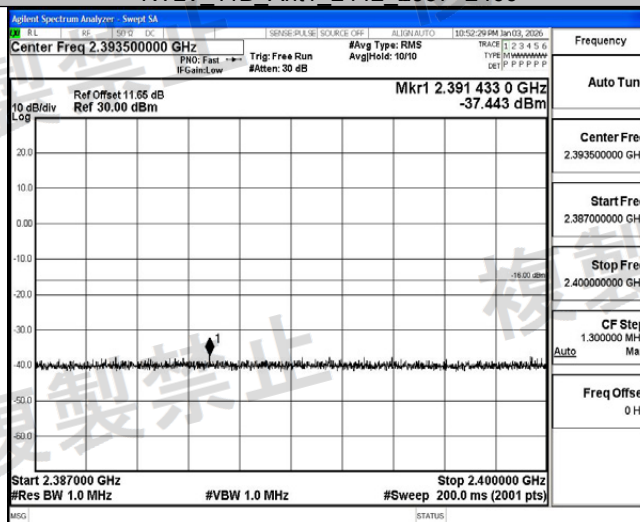


NTLV 11B Ant1 2442 2483.5~2496.5

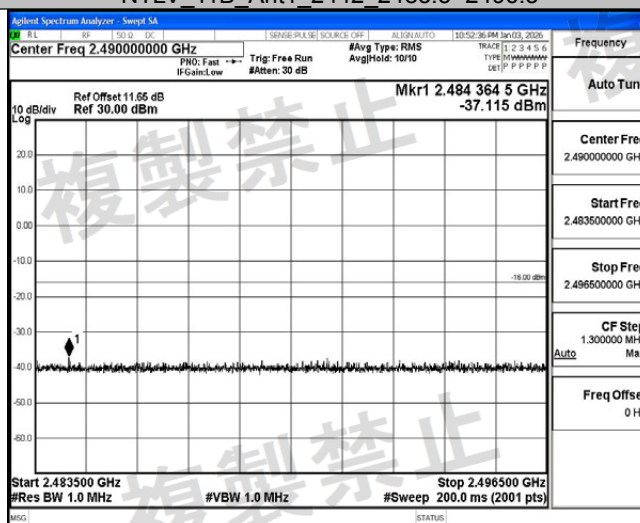





NTLV 11B Ant1 2442 2496.5~13000

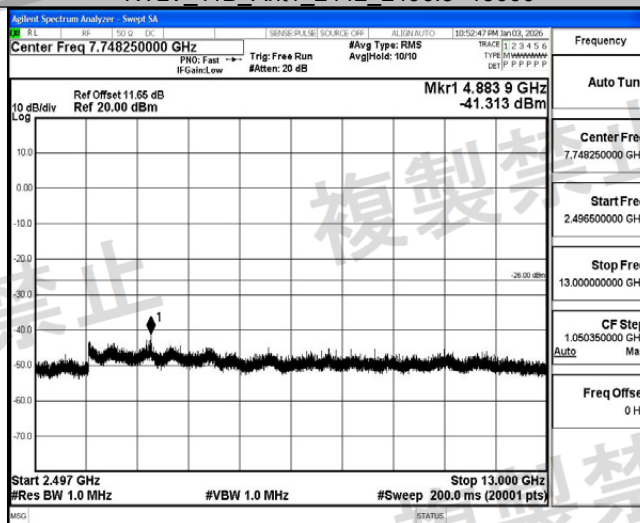

NTLV 11B Ant1 2472 30~1000

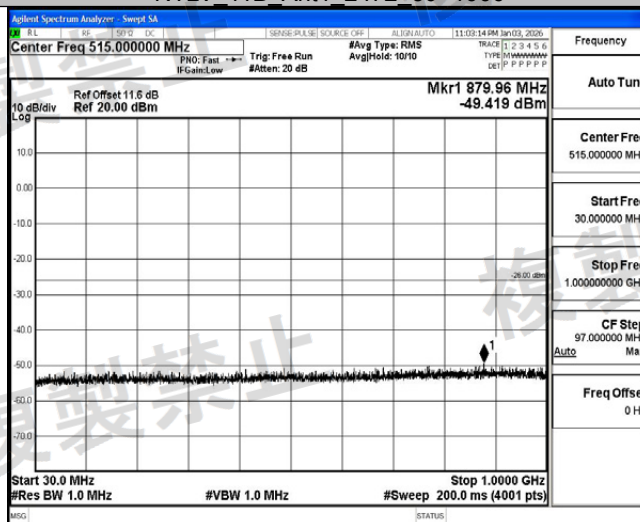


NTLV 11B Ant1 2472 1000~2387

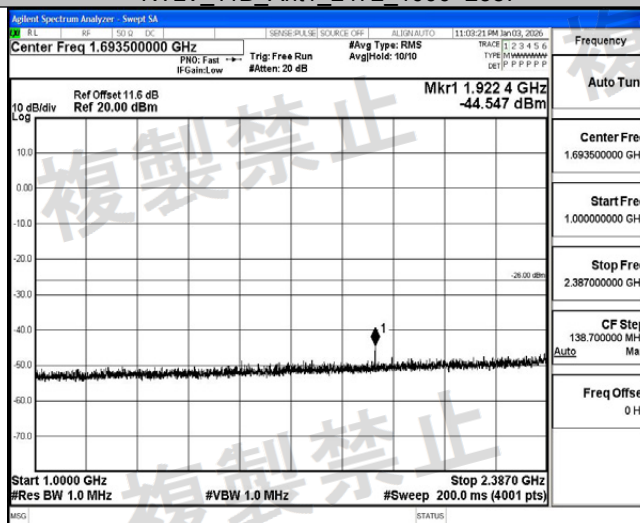





NTLV_11B_Ant1_2472_2387~2400



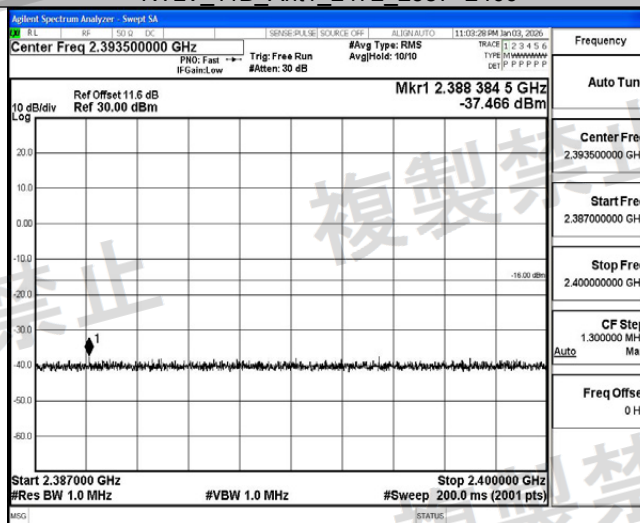


NTLV_11B_Ant1_2472_2483.5~2496.5

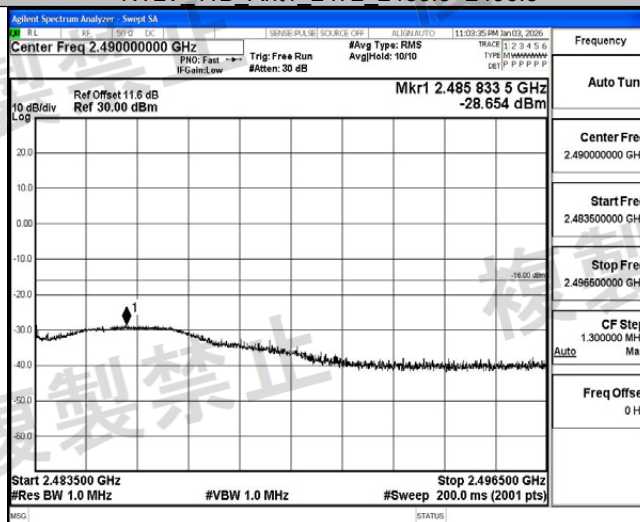


NTLV_11B_Ant1_2472_2496.5~13000

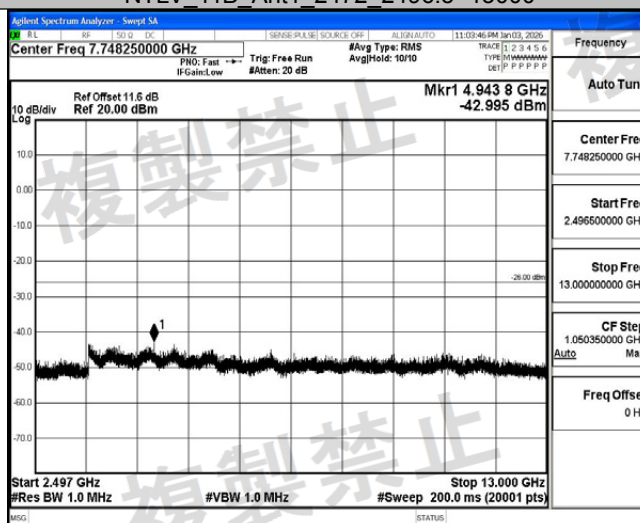

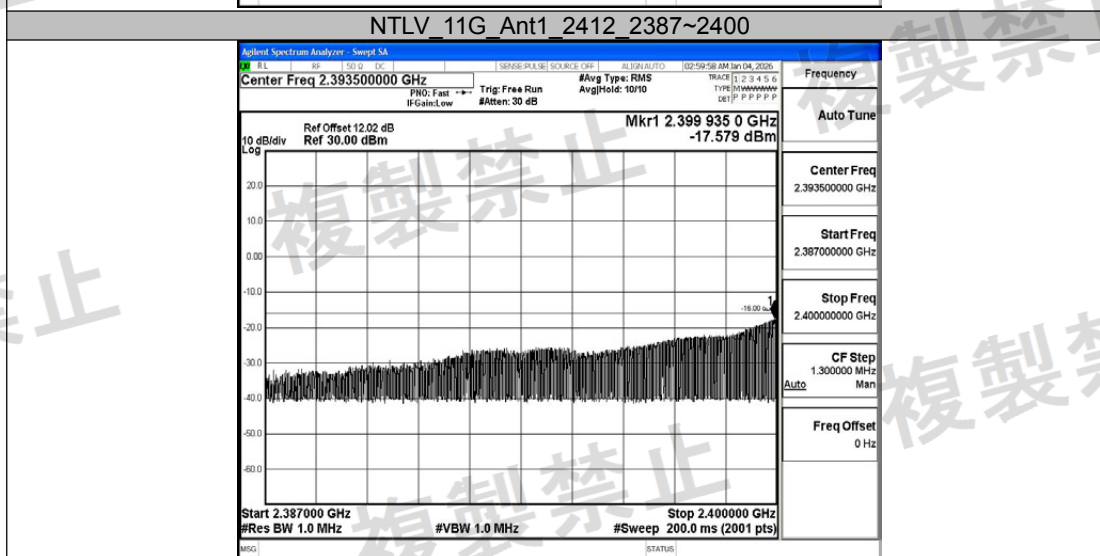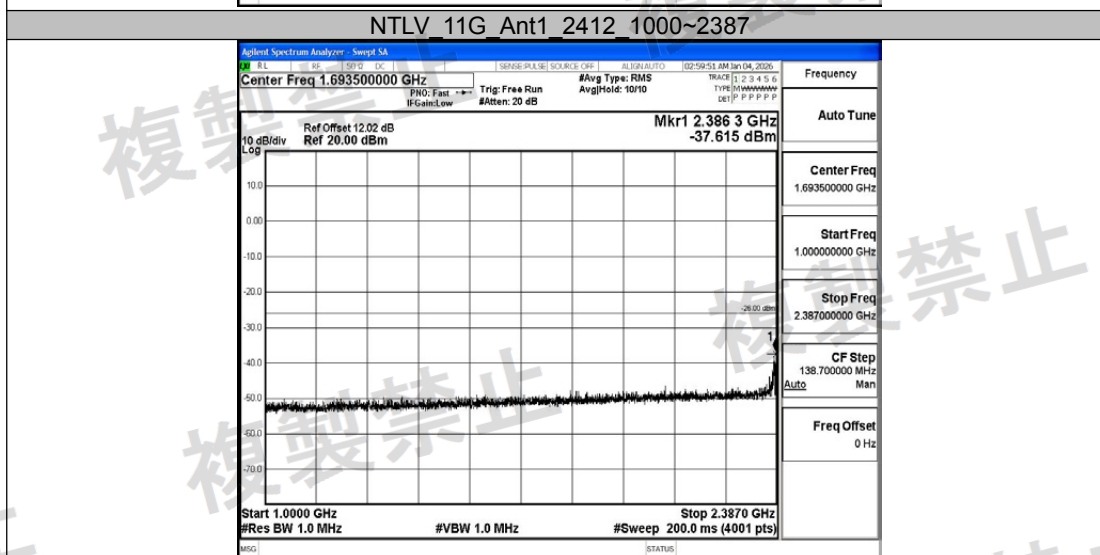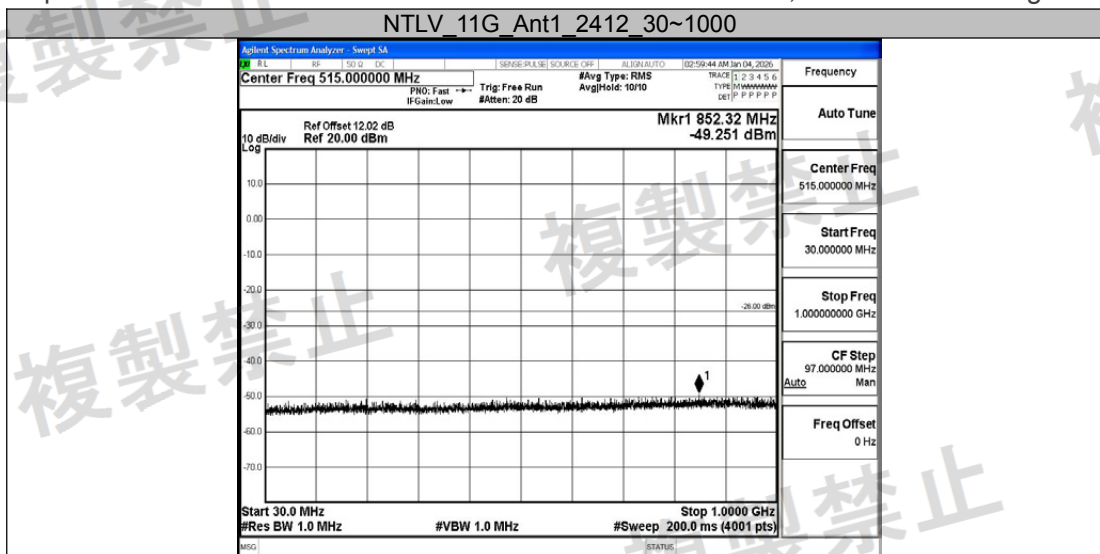





NTLV 11G Ant1 2412 2483.5~2496.5

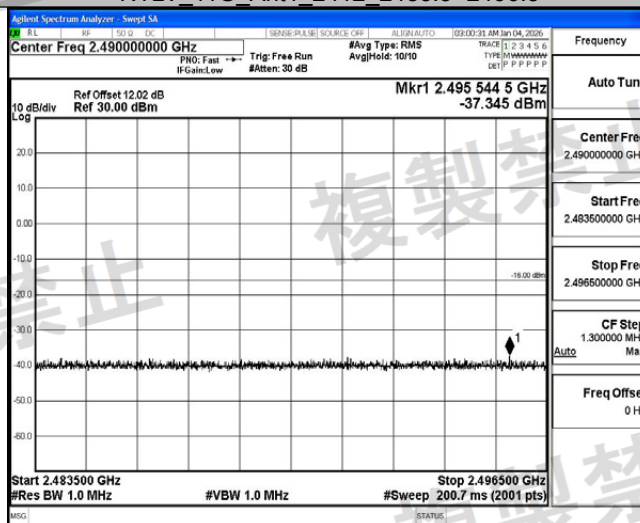

NTLV 11G Ant1 2412 2496.5~13000

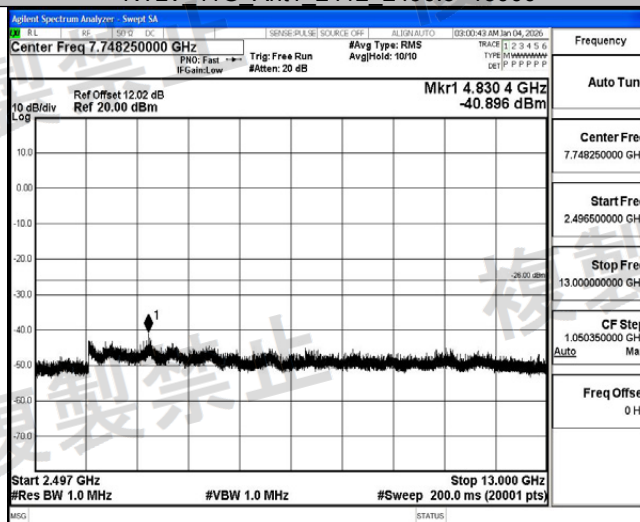


NTLV 11G Ant1 2442 30~1000

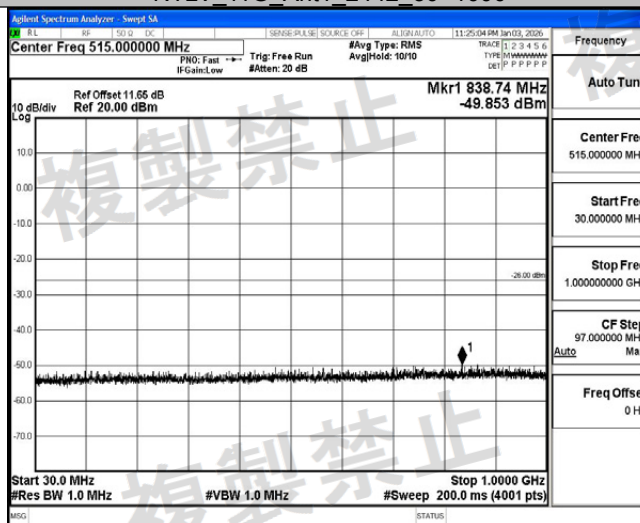





NTLV 11G Ant1 2442 1000~2387

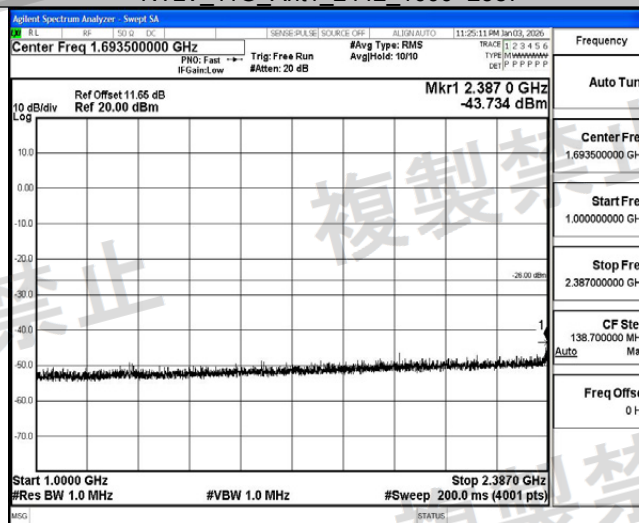

NTLV 11G Ant1 2442 2387~2400

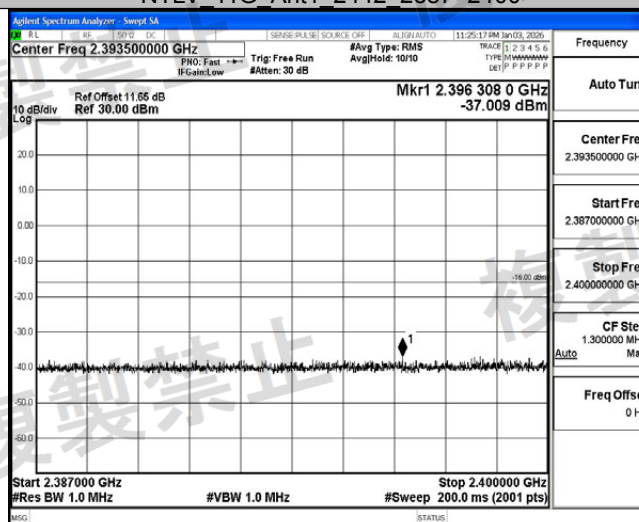


NTLV 11G Ant1 2442 2483.5~2496.5

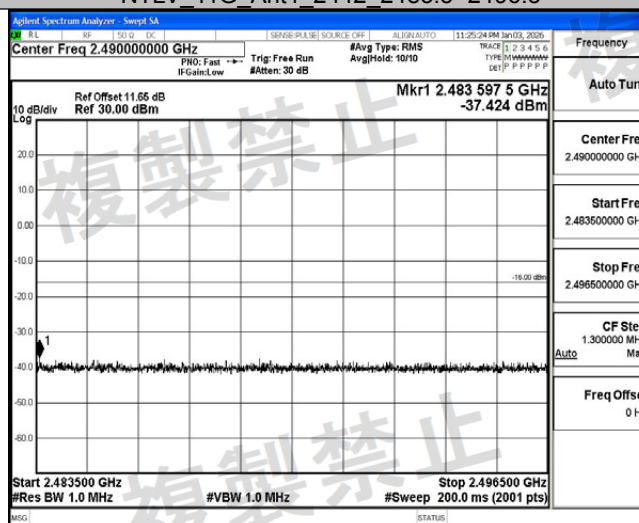





NTLV 11G Ant1 2442 2496.5~13000

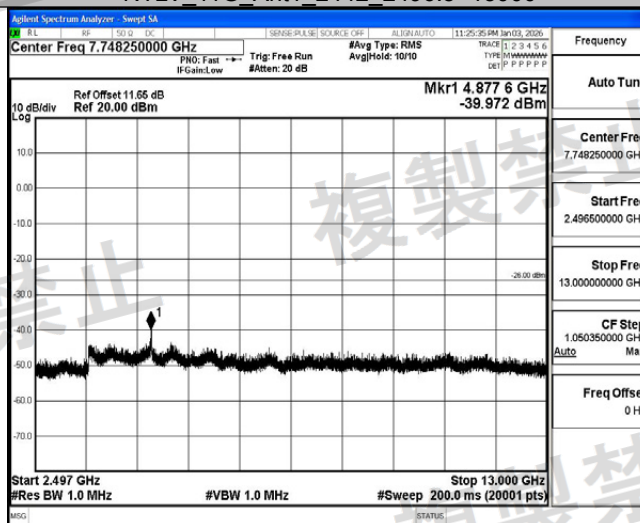

NTLV 11G Ant1 2472 30~1000

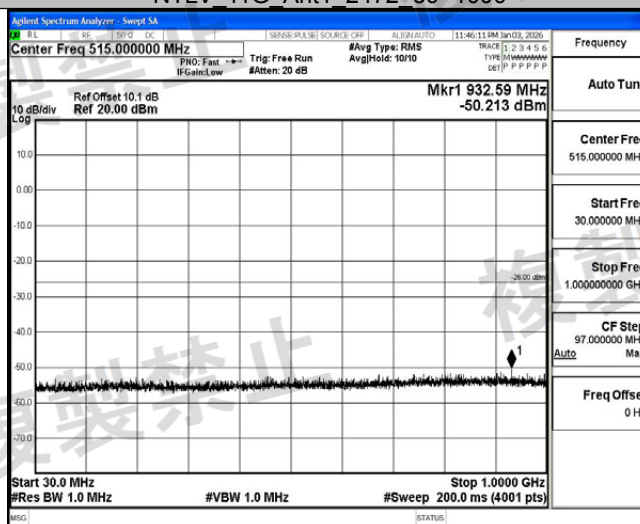


NTLV 11G Ant1 2472 1000~2387

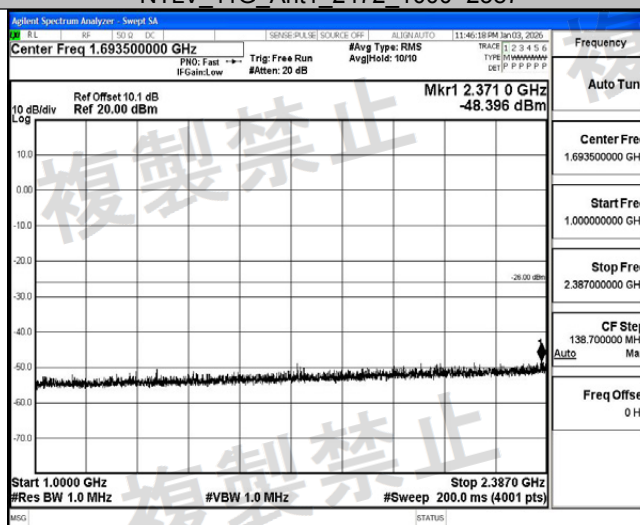





NTLV 11G Ant1 2472 2387~2400

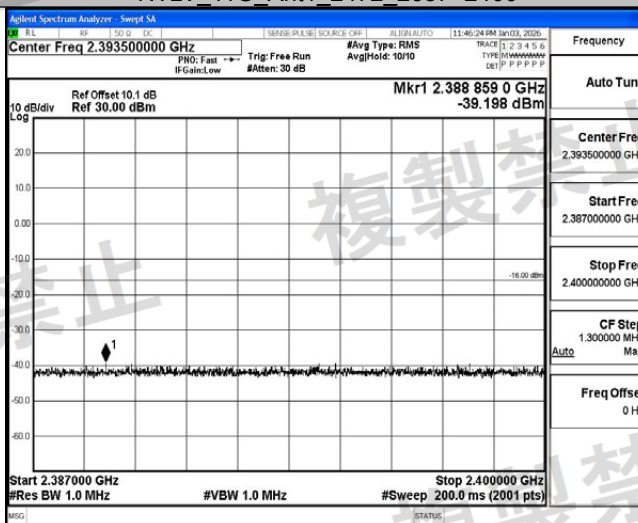

NTLV 11G Ant1 2472 2483.5~2496.5

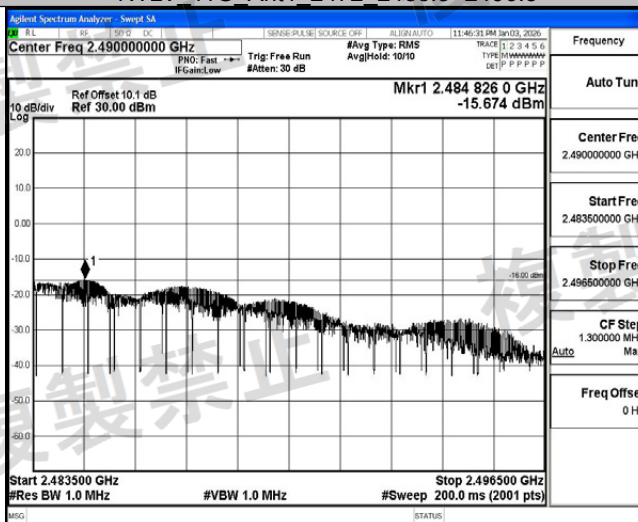


NTLV 11G Ant1 2472 2496.5~13000

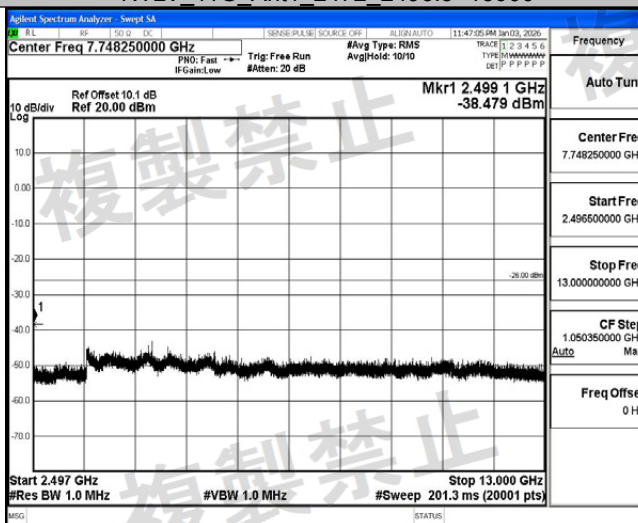





NTLV 11N20SISO_Ant1 2412 30~1000

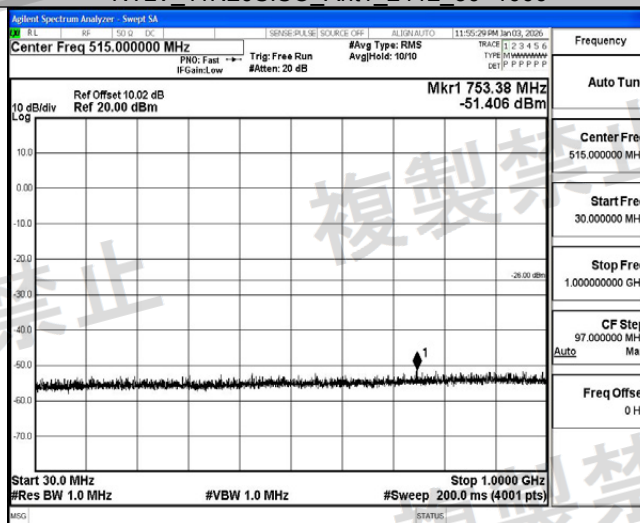

NTLV 11N20SISO_Ant1 2412 1000~2387

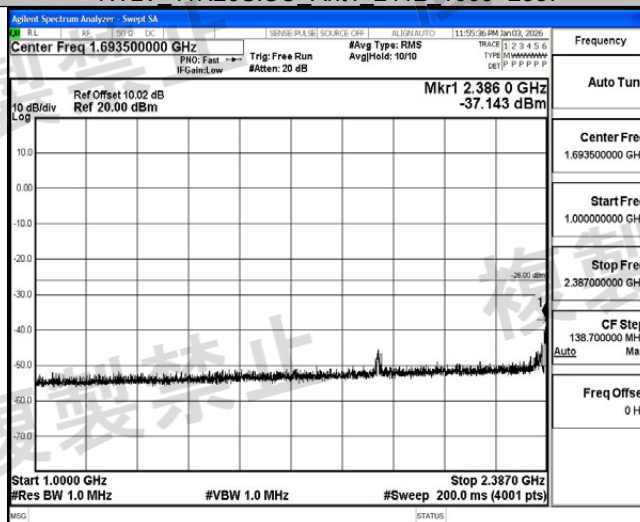


NTLV 11N20SISO_Ant1 2412 2387~2400

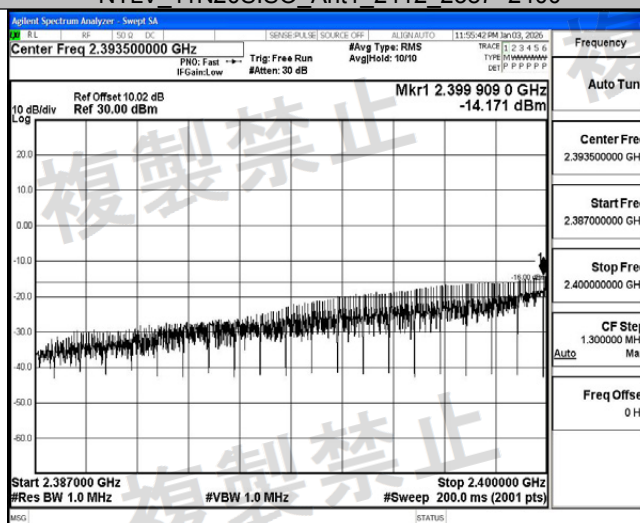





NTLV 11N20SISO_Ant1 2412 2483.5~2496.5

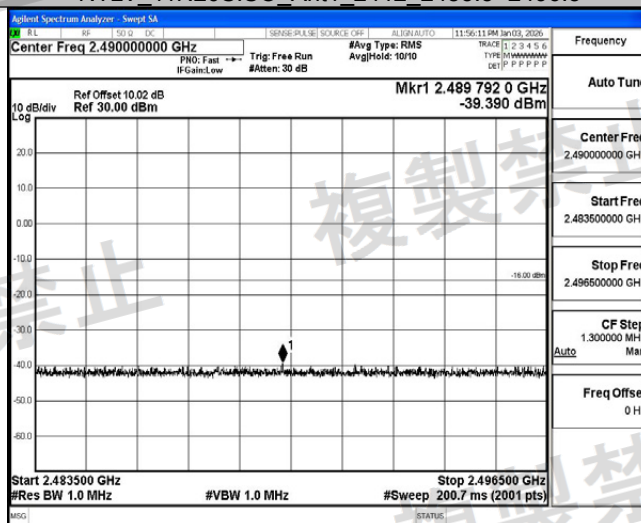

NTLV 11N20SISO_Ant1 2412 2496.5~13000

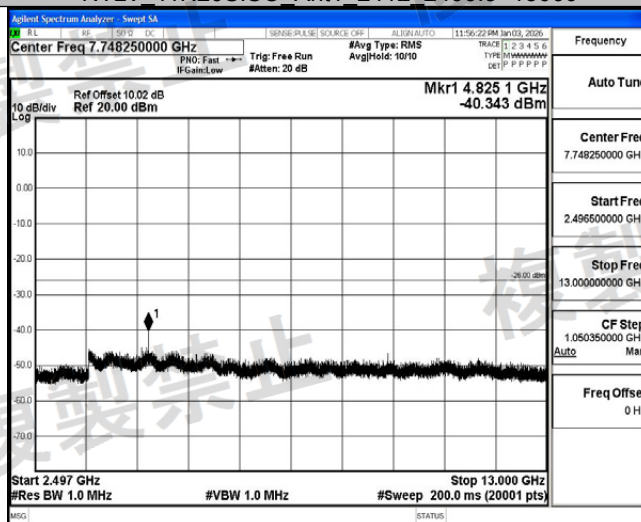


NTLV 11N20SISO_Ant1 2442 30~1000

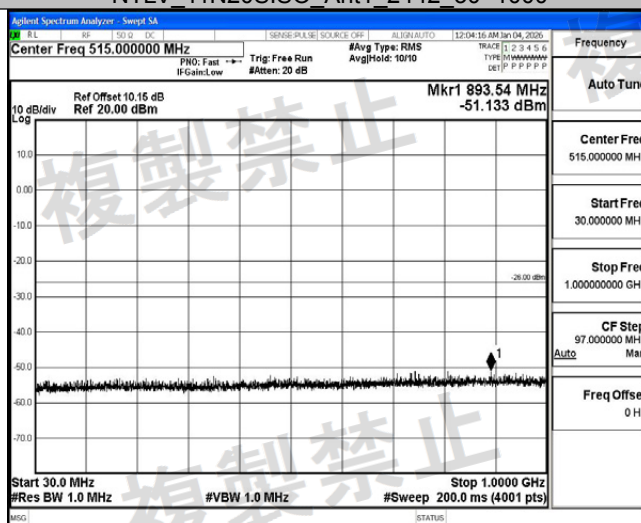





NTLV 11N20SISO_Ant1_2442_1000~2387

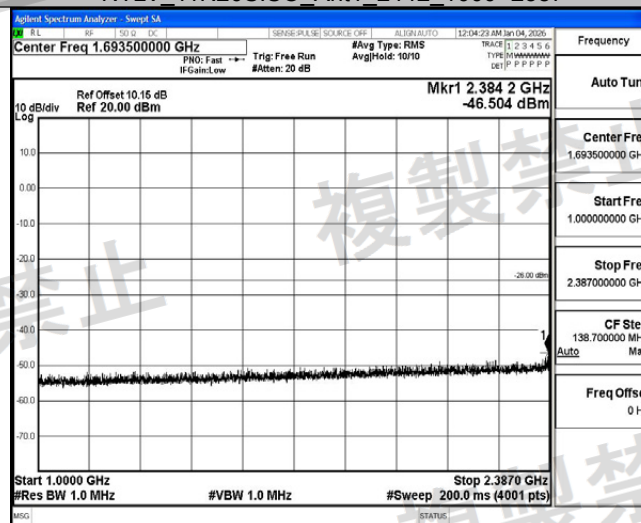

NTLV 11N20SISO_Ant1_2442_2387~2400

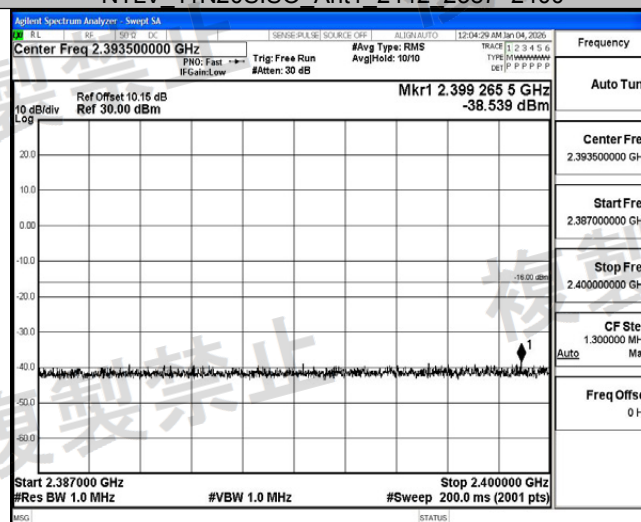


NTLV 11N20SISO_Ant1_2442_2483.5~2496.5

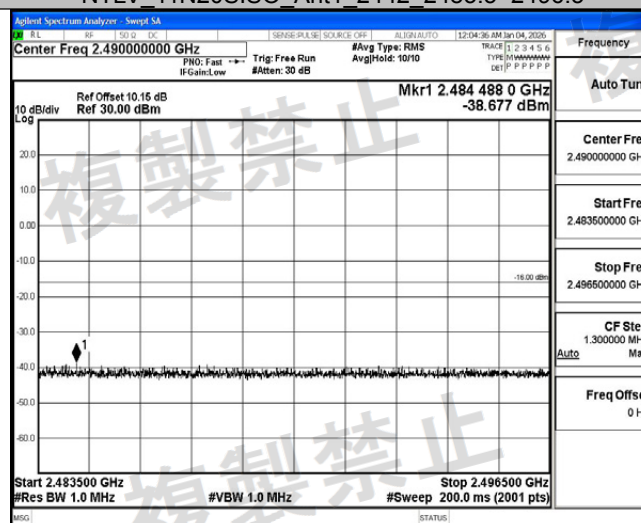




NTLV 11N20SISO Ant1 2442 2496.5~13000

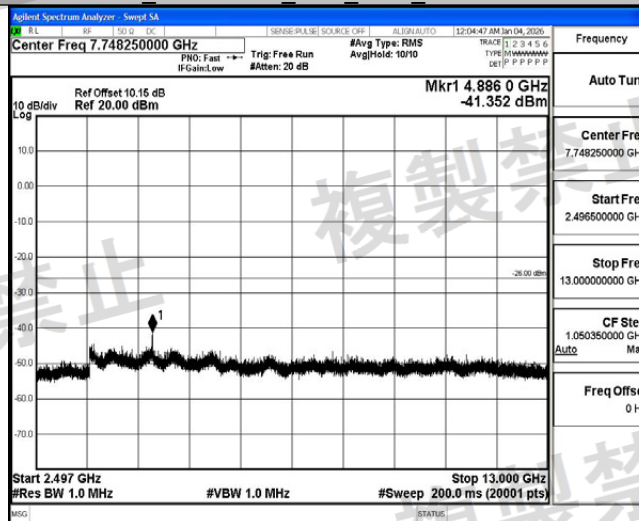

NTLV 11N20SISO Ant1 2472 30~1000

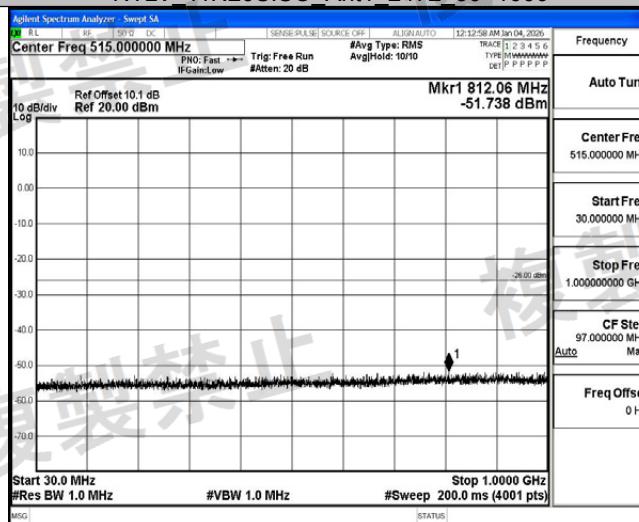

NTLV 11N20SISO Ant1 2472 1000~2387

