






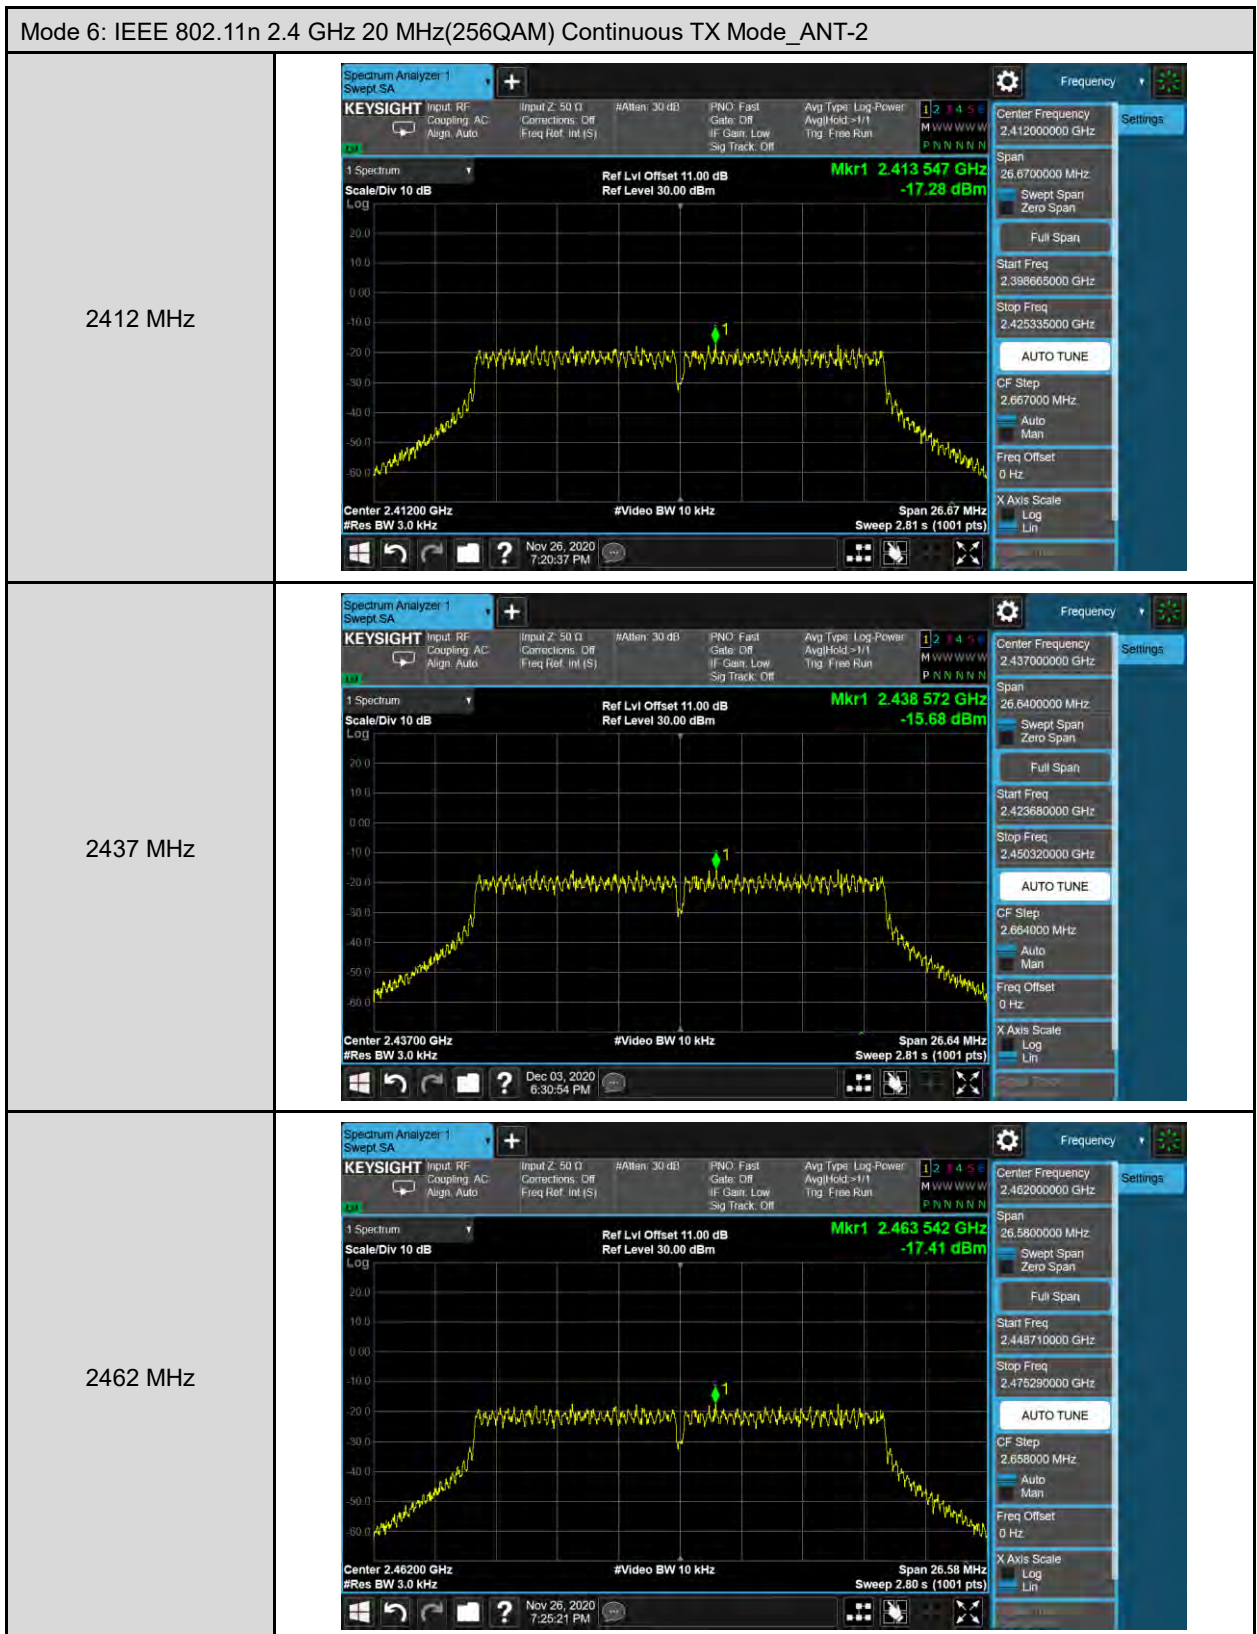


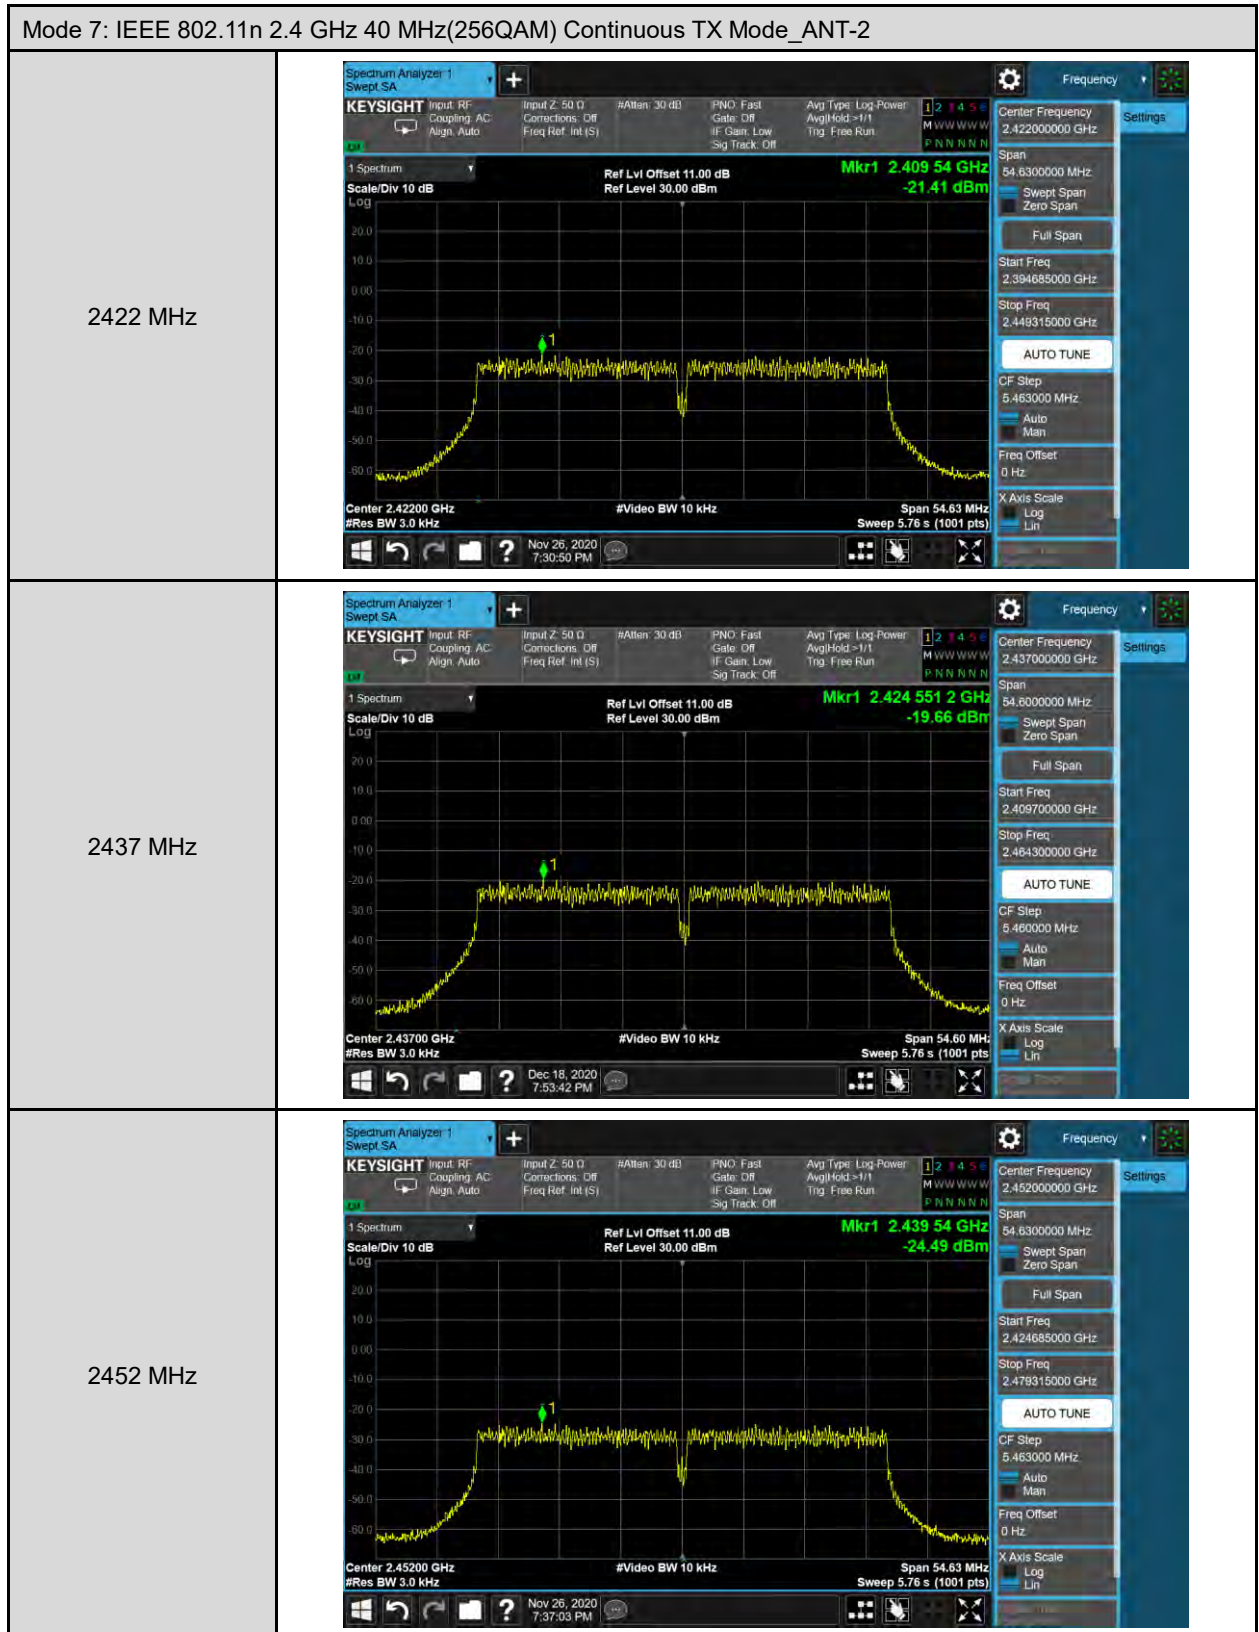

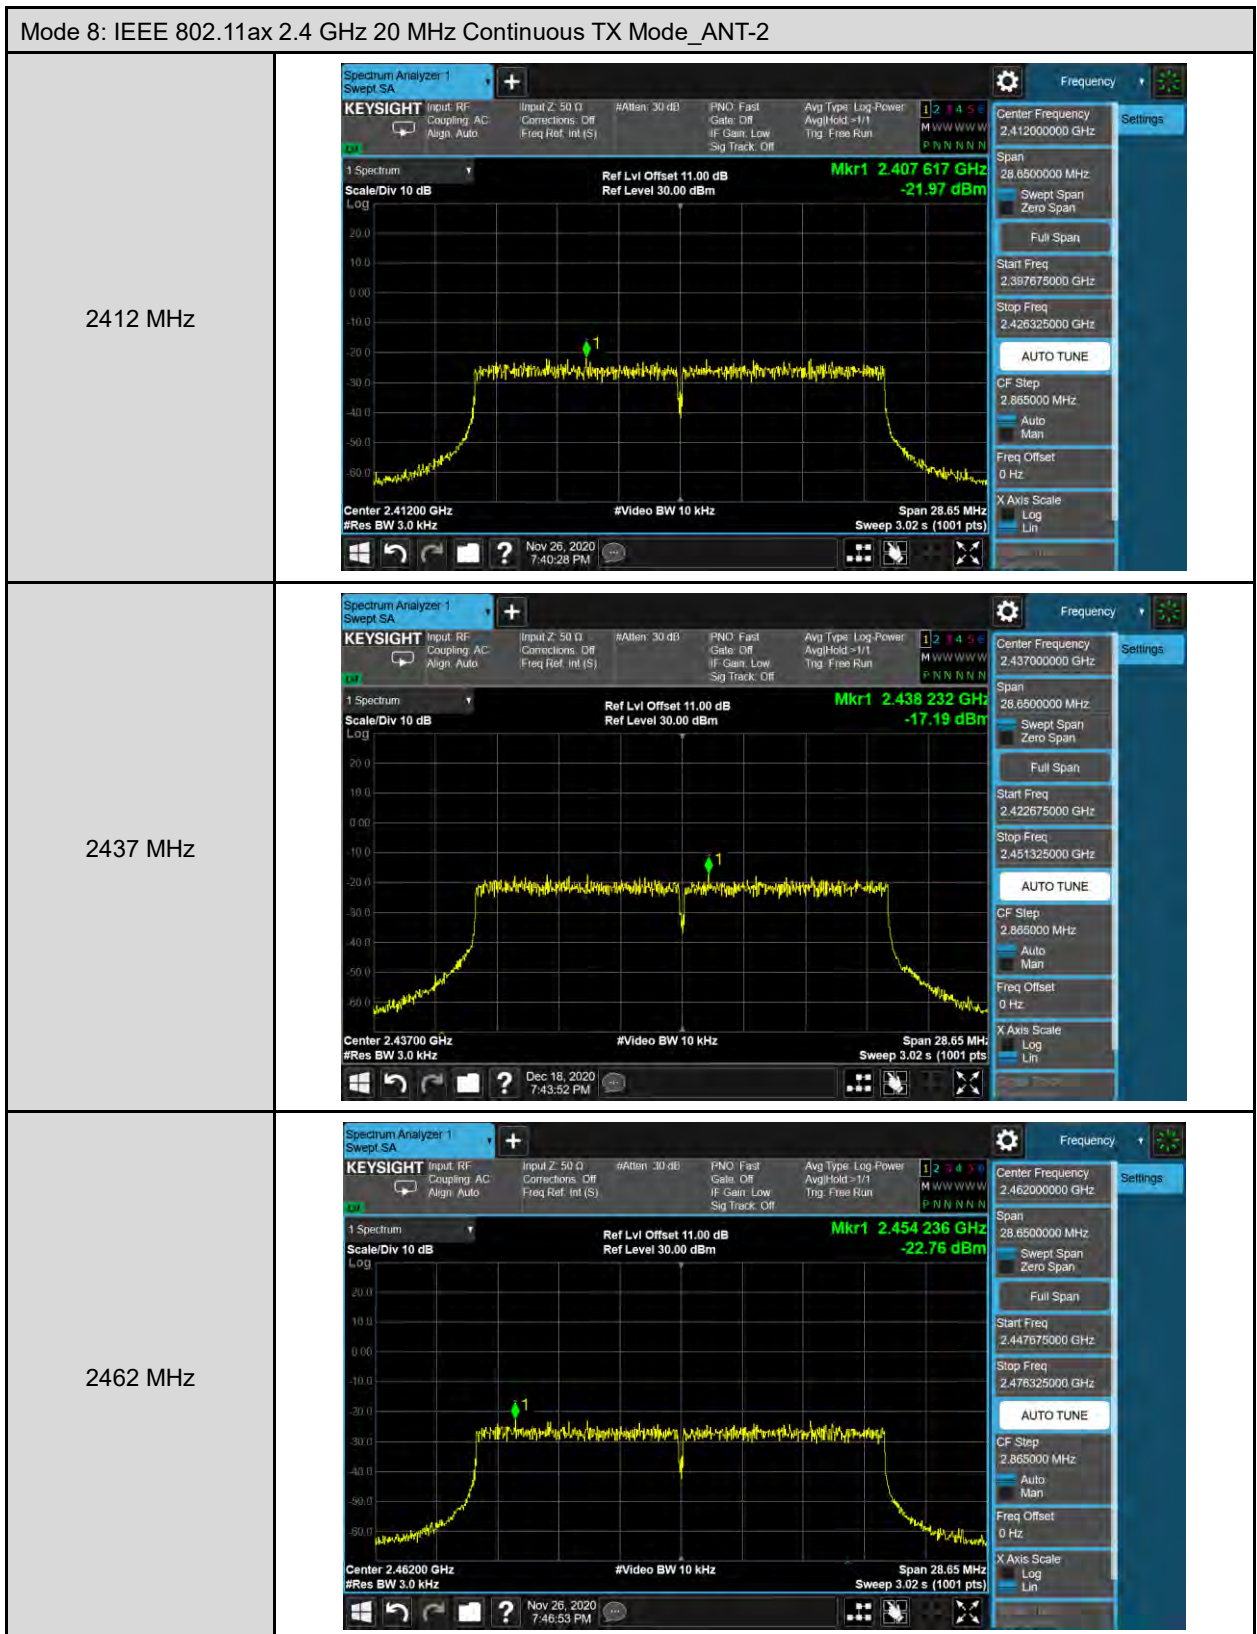


Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX Mode_ANT-3


2412 MHz

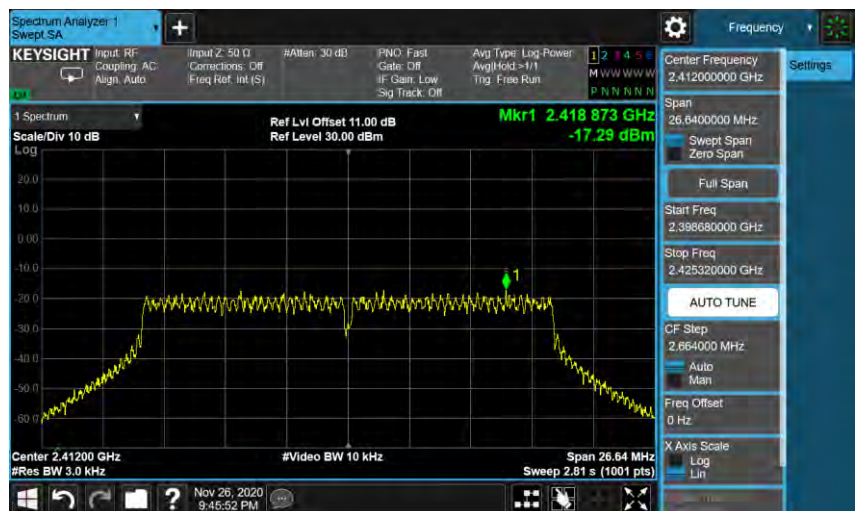



2437 MHz

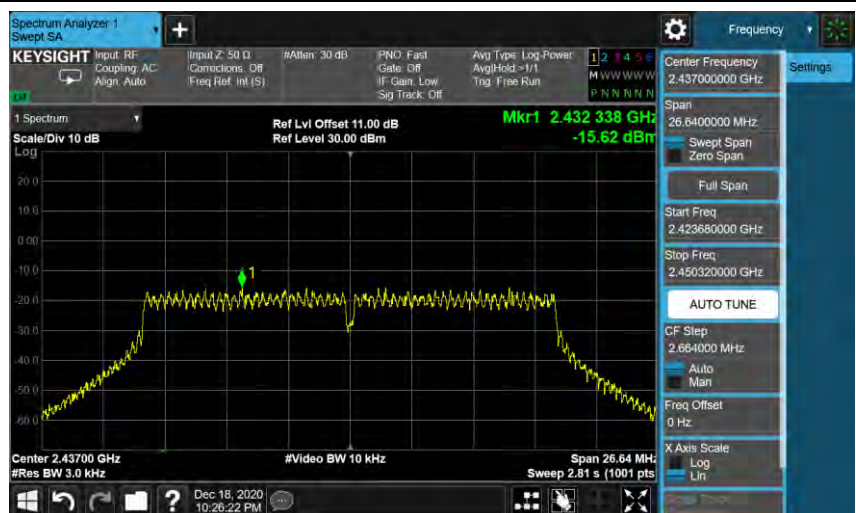

2462 MHz

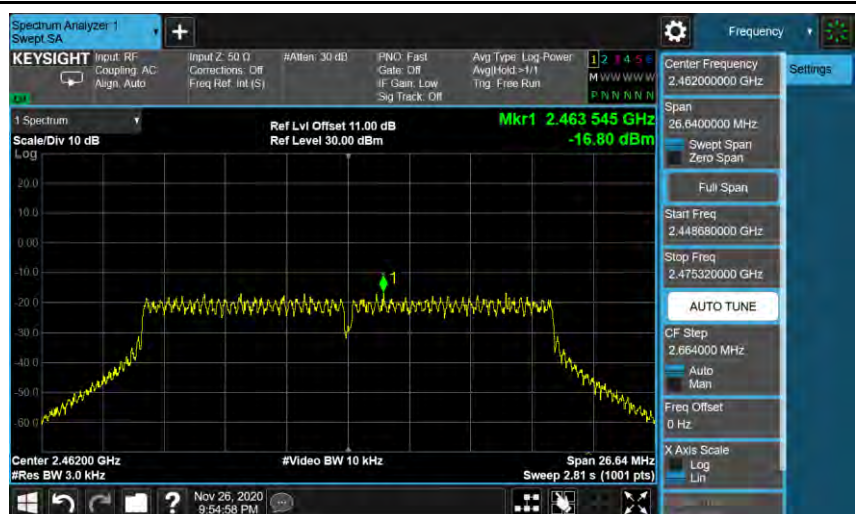

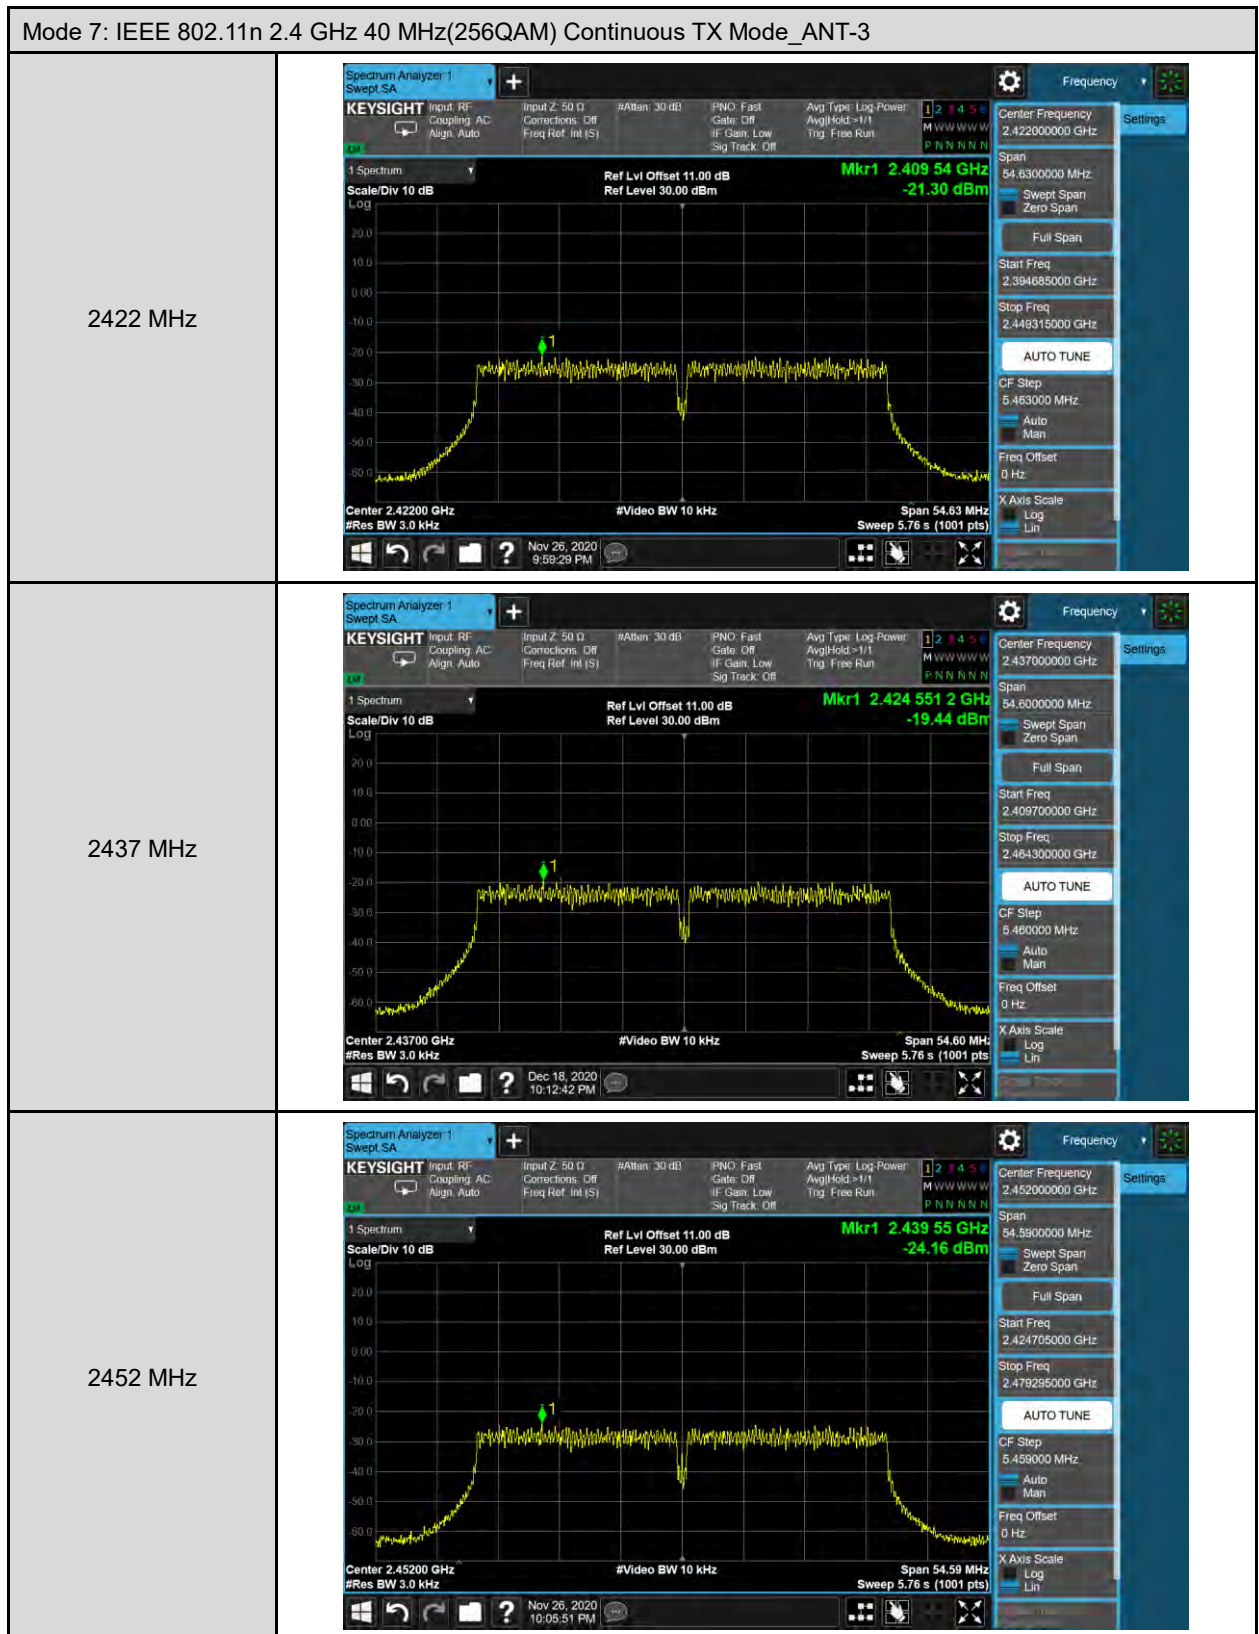

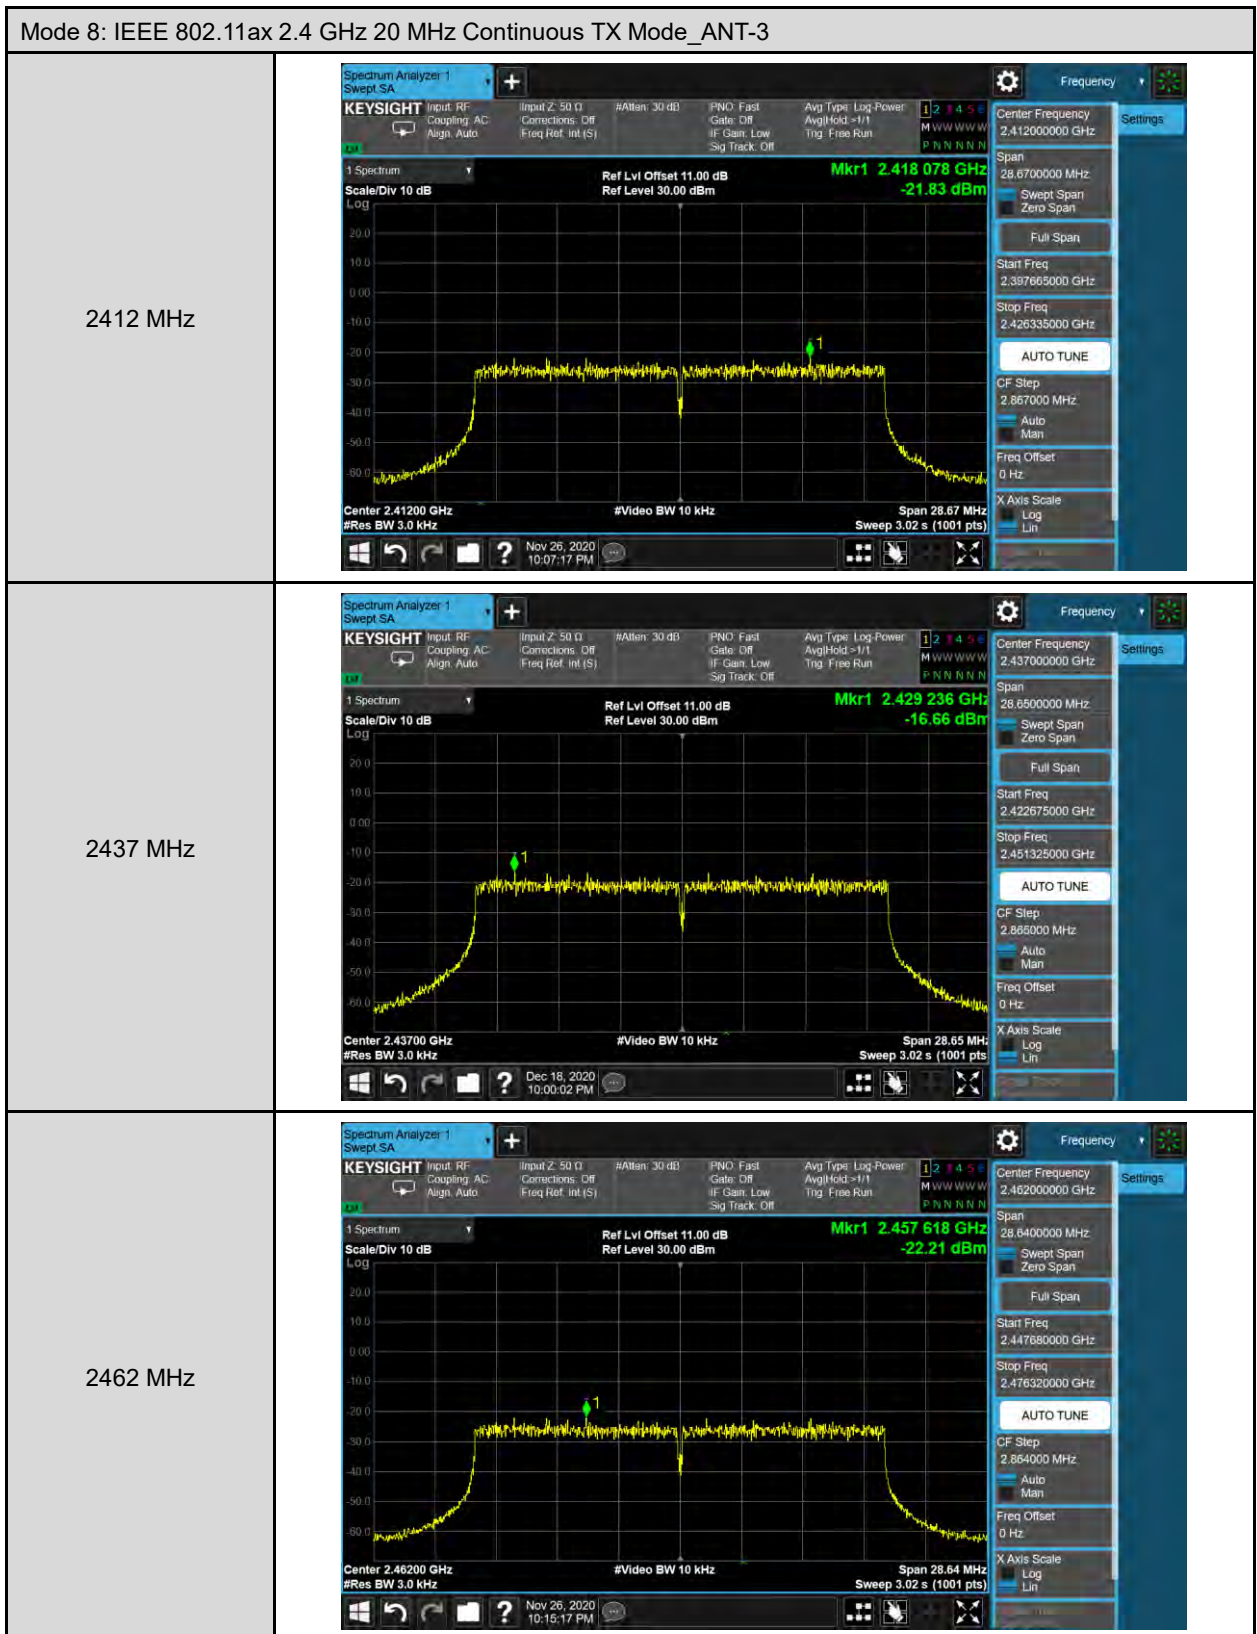




Annex D. Radiated Emission Measurement (5 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

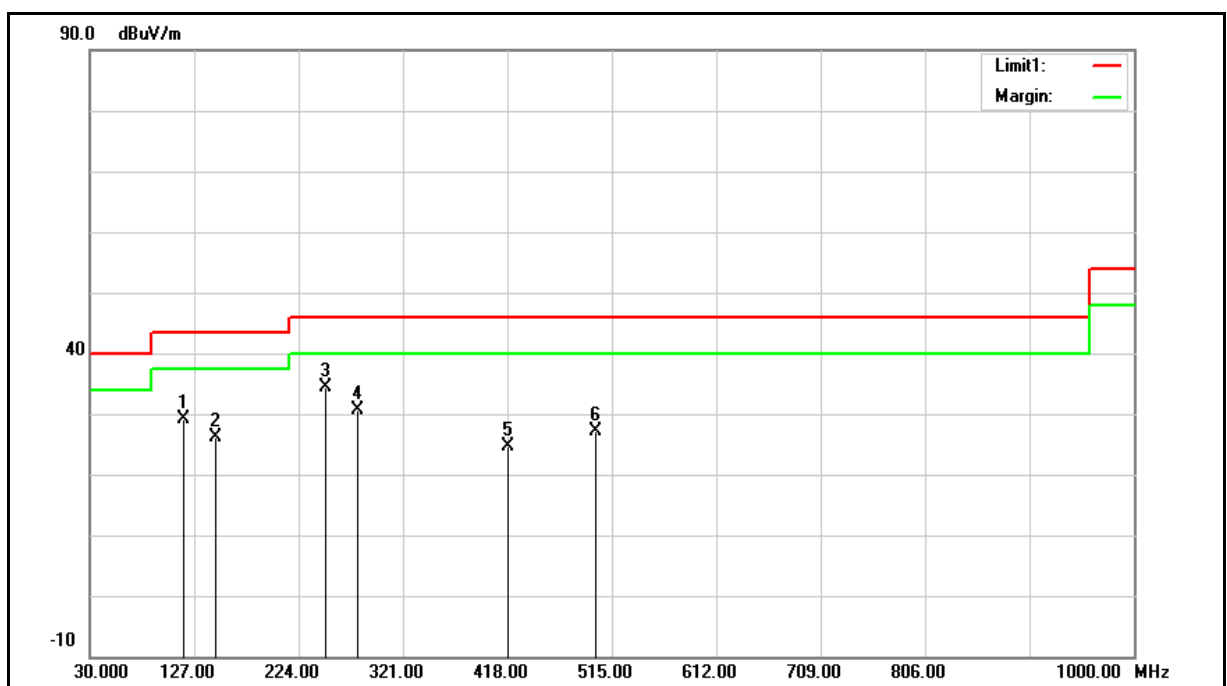

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	117.3000	55.91	-26.82	29.09	43.50	-14.41	QP
2	147.3700	50.59	-24.47	26.12	43.50	-17.38	QP
3	249.2200	59.75	-25.36	34.39	46.00	-11.61	QP
4	279.2900	54.76	-24.17	30.59	46.00	-15.41	QP
5	418.9700	45.58	-20.88	24.70	46.00	-21.30	QP
6	500.4500	46.73	-19.64	27.09	46.00	-18.91	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 29.09 = -26.82 + 55.91

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

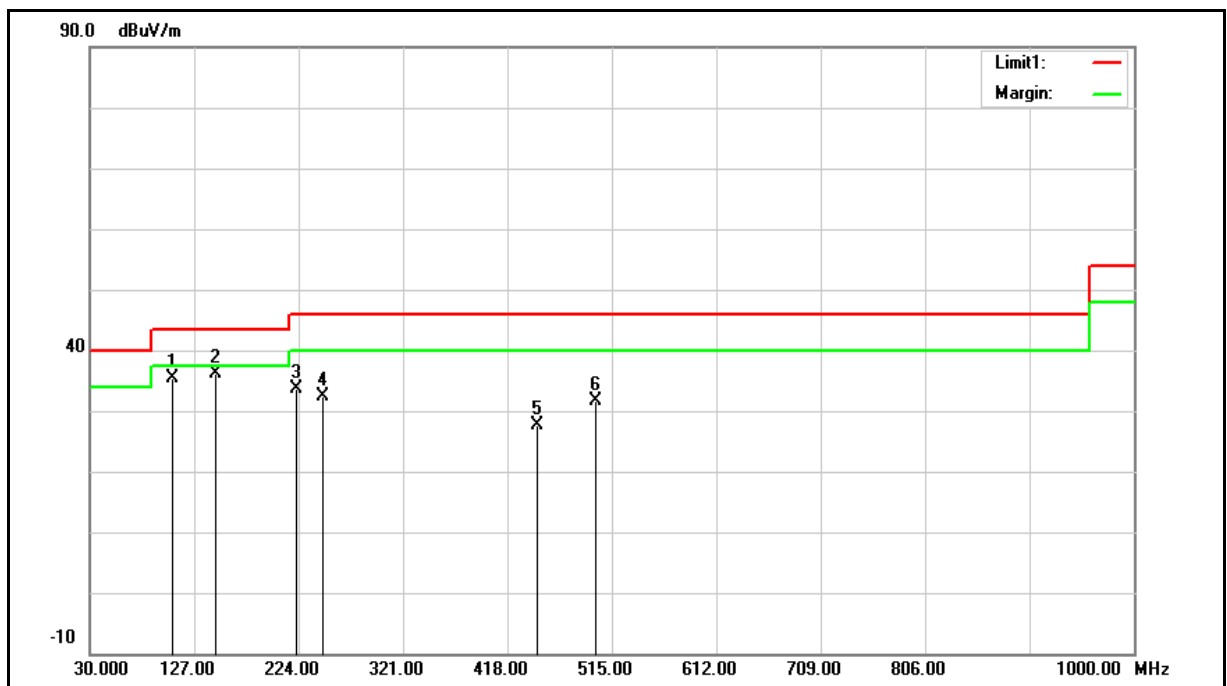

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	106.6300	63.62	-28.18	35.44	43.50	-8.06	QP
2	147.3700	60.64	-24.47	36.17	43.50	-7.33	QP
3	222.0600	60.20	-26.51	33.69	46.00	-12.31	QP
4	246.3100	57.69	-25.42	32.27	46.00	-13.73	QP
5	446.1300	47.86	-20.27	27.59	46.00	-18.41	QP
6	500.4500	51.23	-19.64	31.59	46.00	-14.41	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $35.44 = -28.18 + 63.62$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

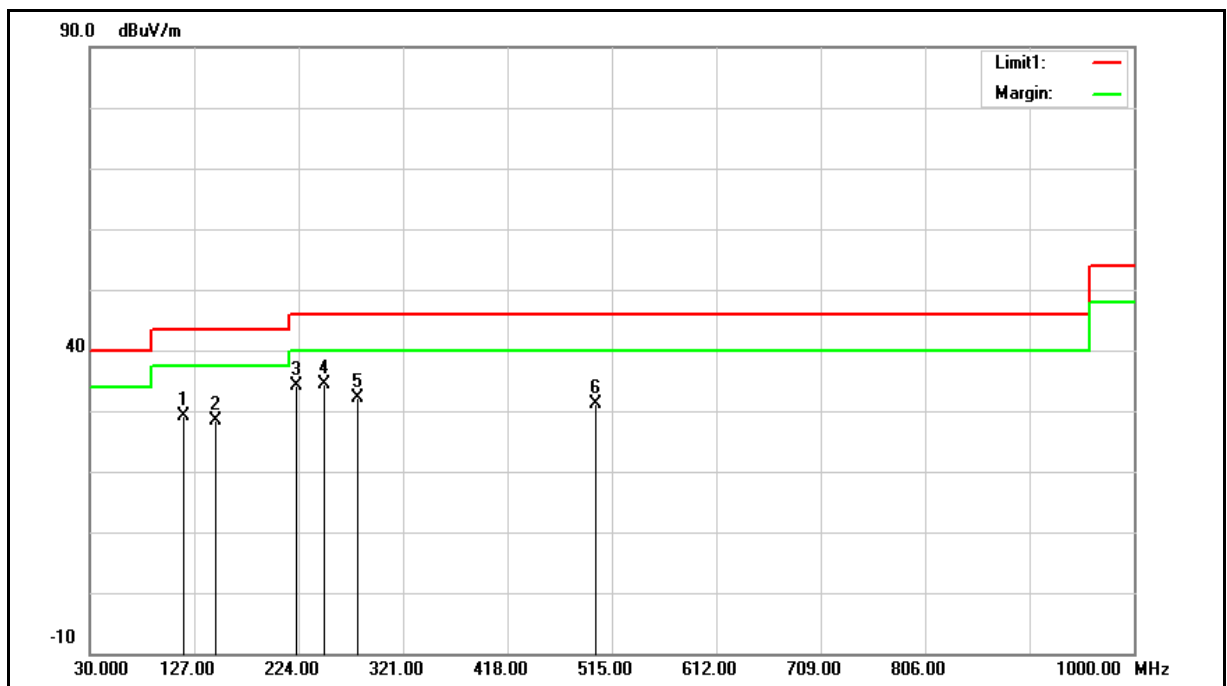


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	117.3000	56.03	-26.82	29.21	43.50	-14.29	QP
2	147.3700	52.96	-24.47	28.49	43.50	-15.01	QP
3	222.0600	60.74	-26.51	34.23	46.00	-11.77	QP
4	247.2800	59.67	-25.39	34.28	46.00	-11.72	QP
5	279.2900	56.29	-24.17	32.12	46.00	-13.88	QP
6	500.4500	50.71	-19.64	31.07	46.00	-14.93	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

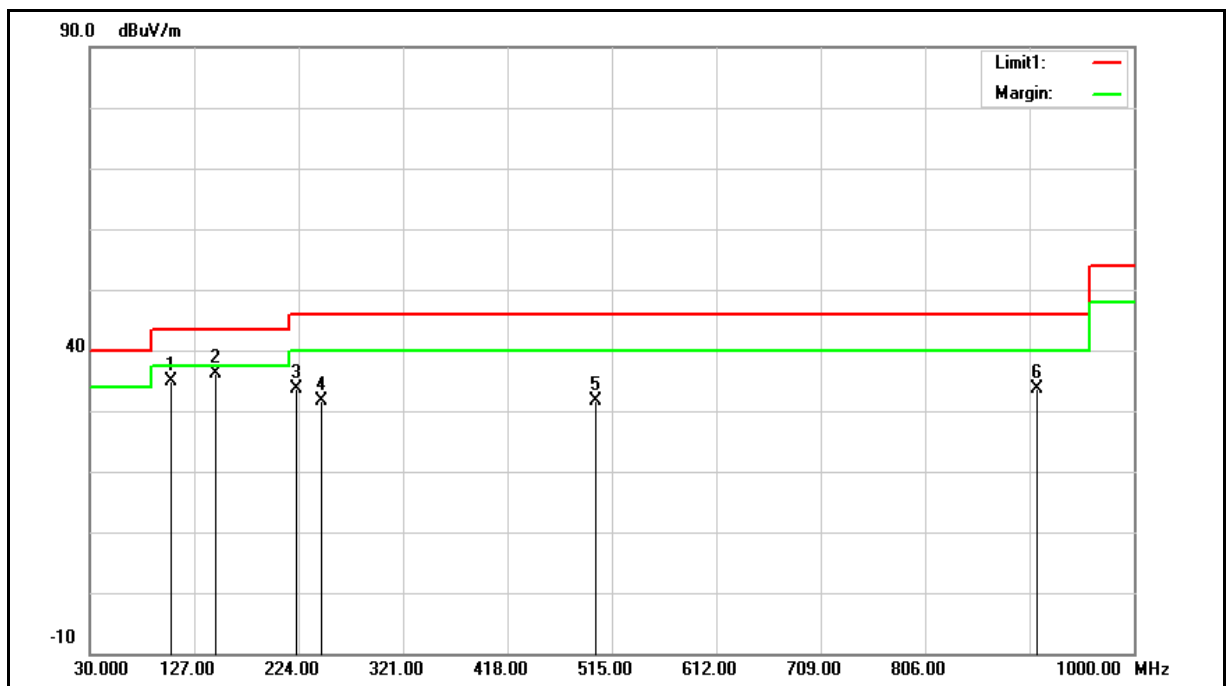

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	105.6600	63.20	-28.35	34.85	43.50	-8.65	QP
2	147.3700	60.71	-24.47	36.24	43.50	-7.26	QP
3	222.0600	60.02	-26.51	33.51	46.00	-12.49	QP
4	245.3400	57.17	-25.44	31.73	46.00	-14.27	QP
5	500.4500	51.29	-19.64	31.65	46.00	-14.35	QP
6	909.7900	46.75	-13.00	33.75	46.00	-12.25	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量側 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

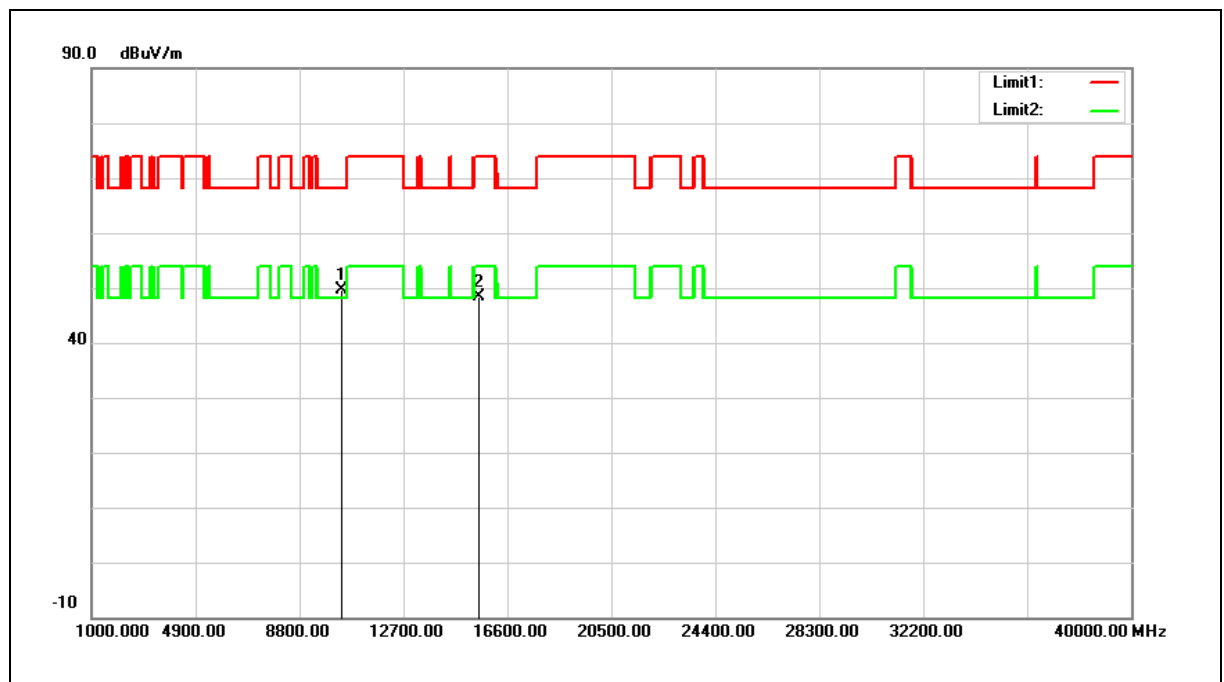

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	38.01	11.69	49.70	68.20	-18.50	peak
2	15540.000	33.75	14.52	48.27	74.00	-25.73	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $49.70 = 11.69 + 38.01$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

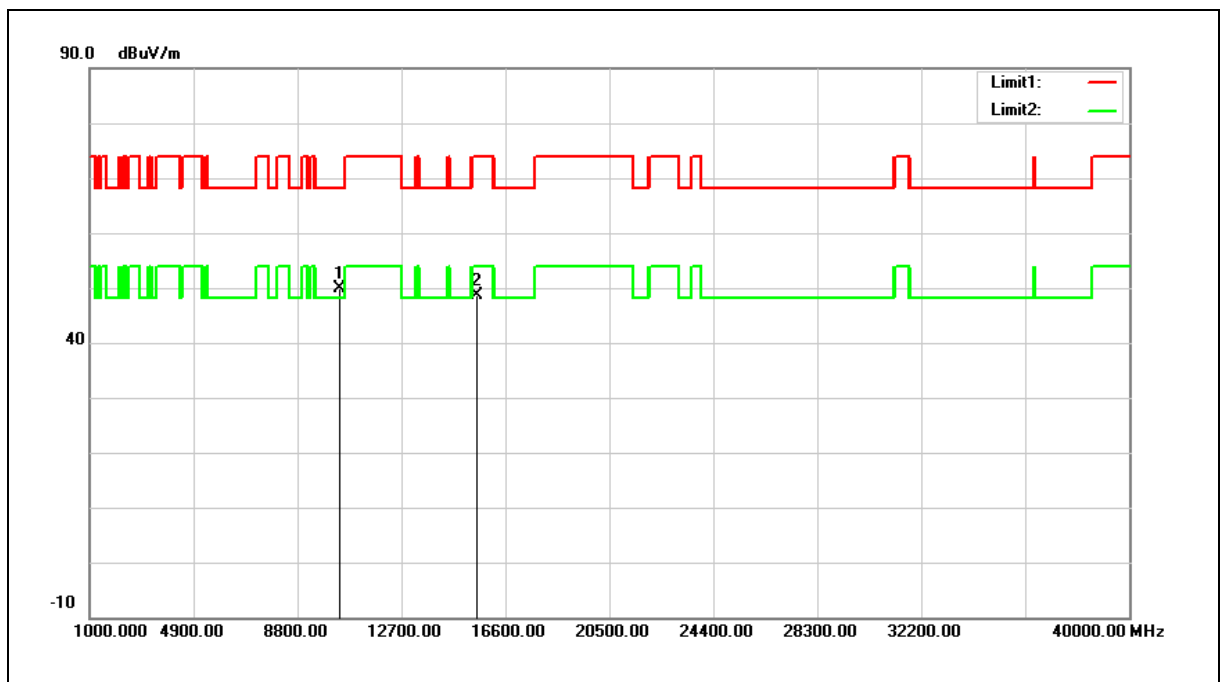

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	38.17	11.69	49.86	68.20	-18.34	peak
2	15540.000	34.08	14.52	48.60	74.00	-25.40	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $49.86 = 11.69 + 38.17$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

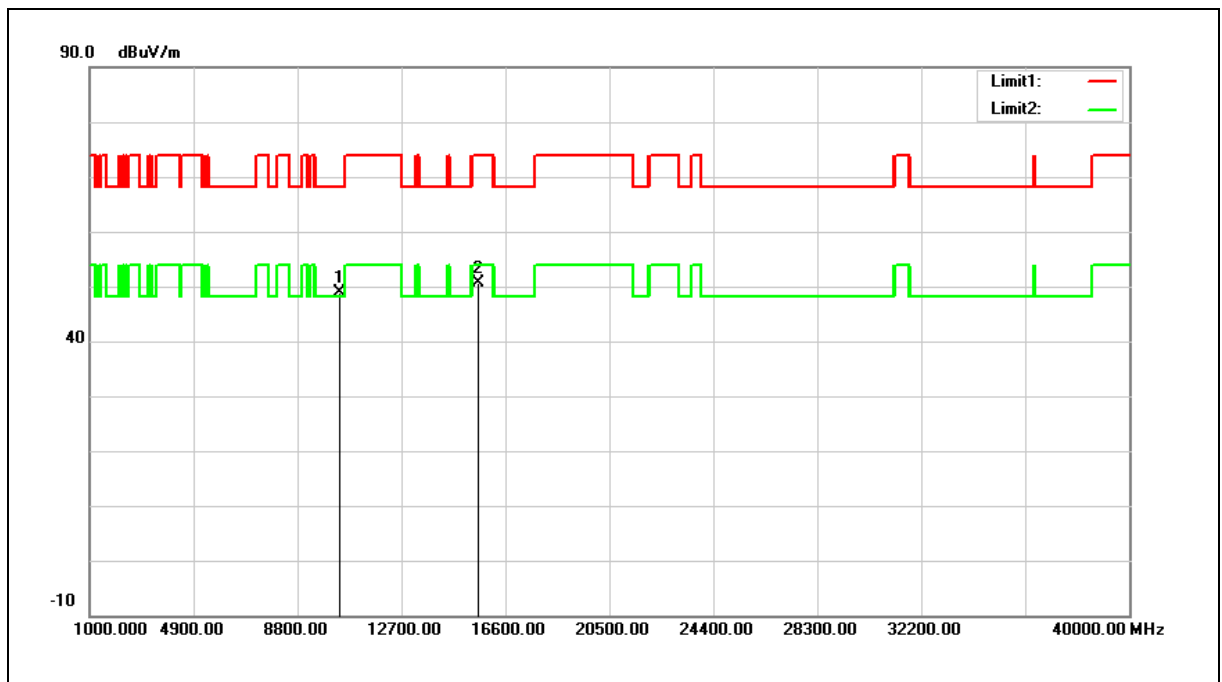


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	37.16	11.79	48.95	68.20	-19.25	peak
2	15600.000	36.12	14.39	50.51	74.00	-23.49	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

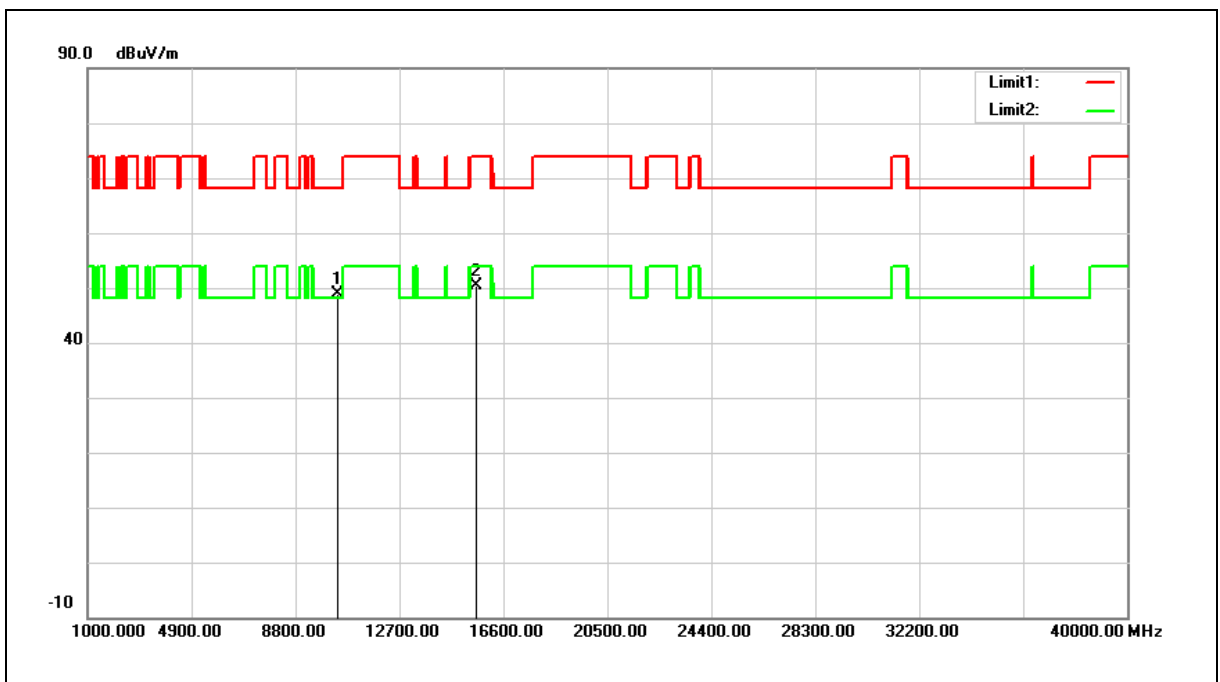


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	37.06	11.79	48.85	68.20	-19.35	peak
2	15600.000	35.87	14.39	50.26	74.00	-23.74	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

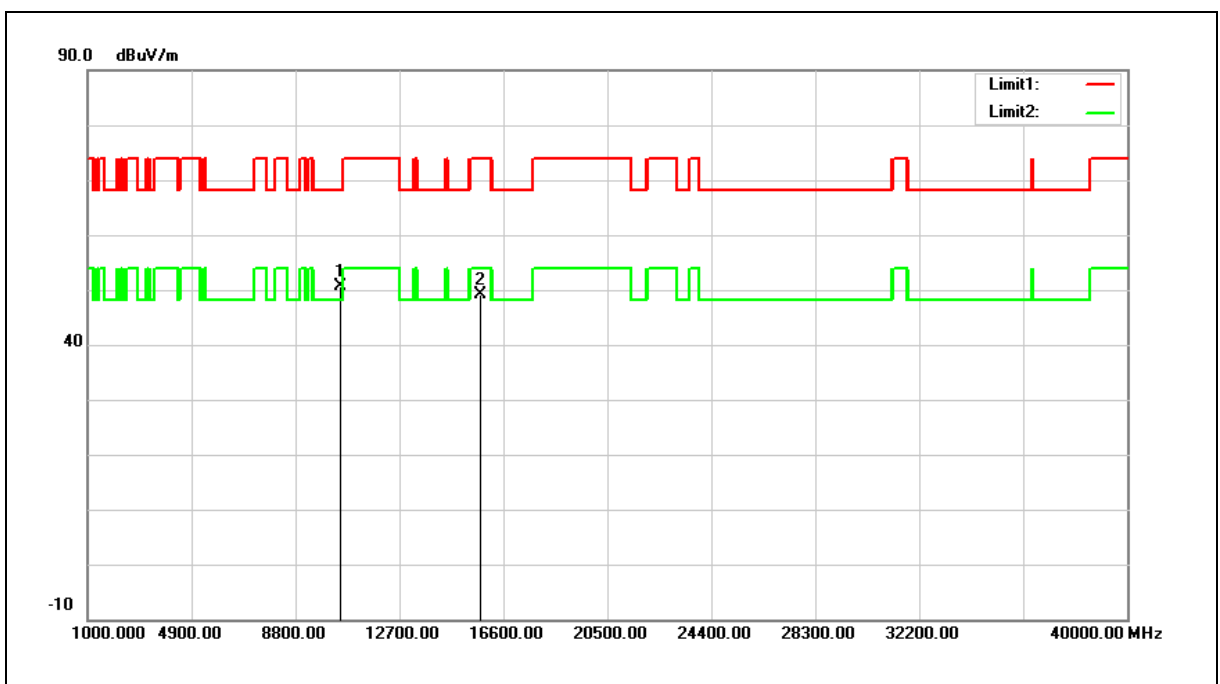


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	38.57	12.00	50.57	68.20	-17.63	peak
2	15720.000	34.98	14.13	49.11	74.00	-24.89	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

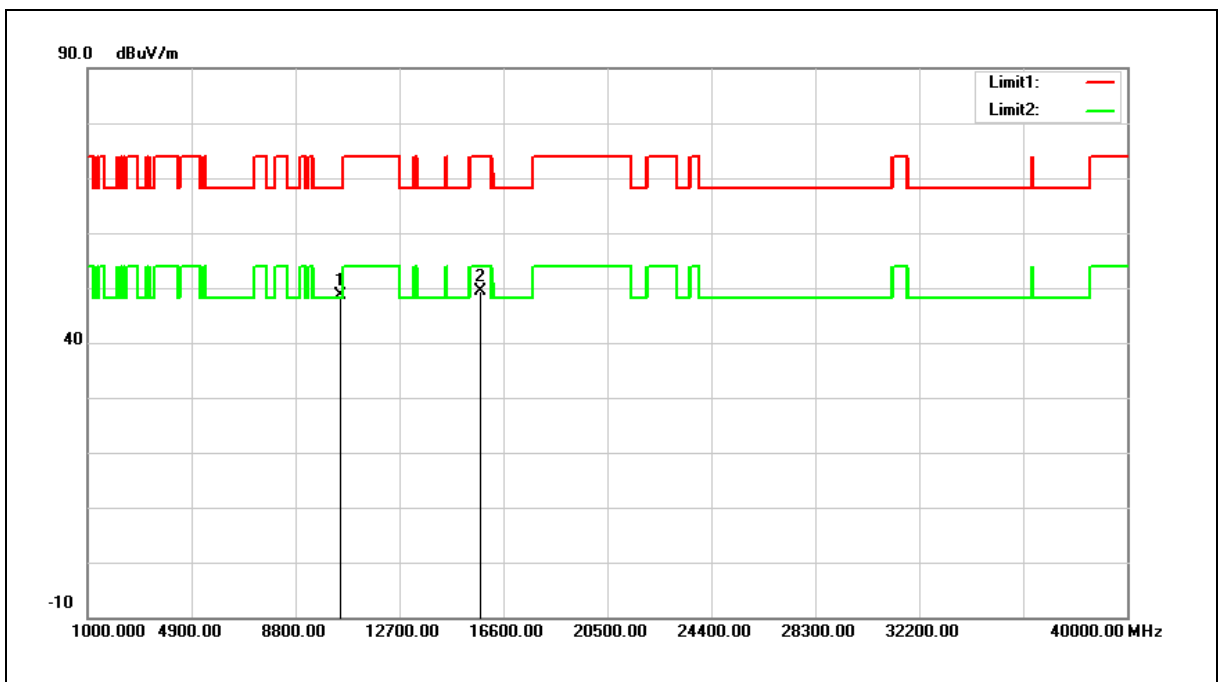


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.70	12.00	48.70	68.20	-19.50	peak
2	15720.000	35.20	14.13	49.33	74.00	-24.67	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

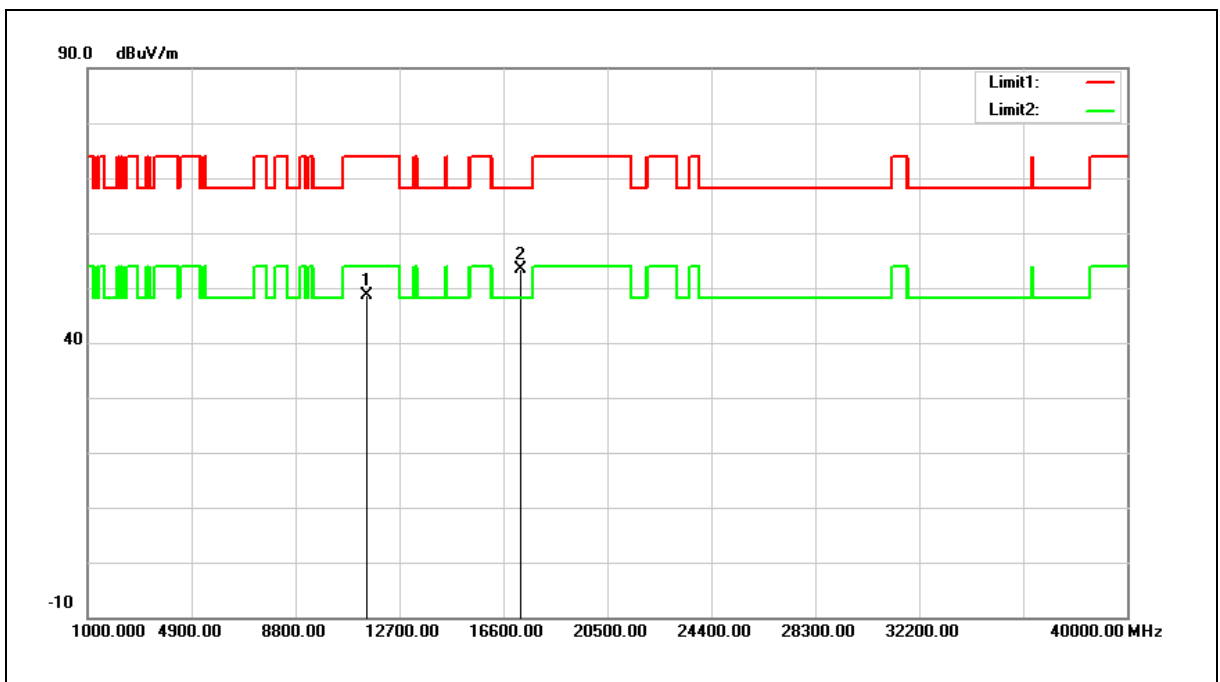


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.87	12.68	48.55	74.00	-25.45	peak
2	17235.000	34.74	18.52	53.26	68.20	-14.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

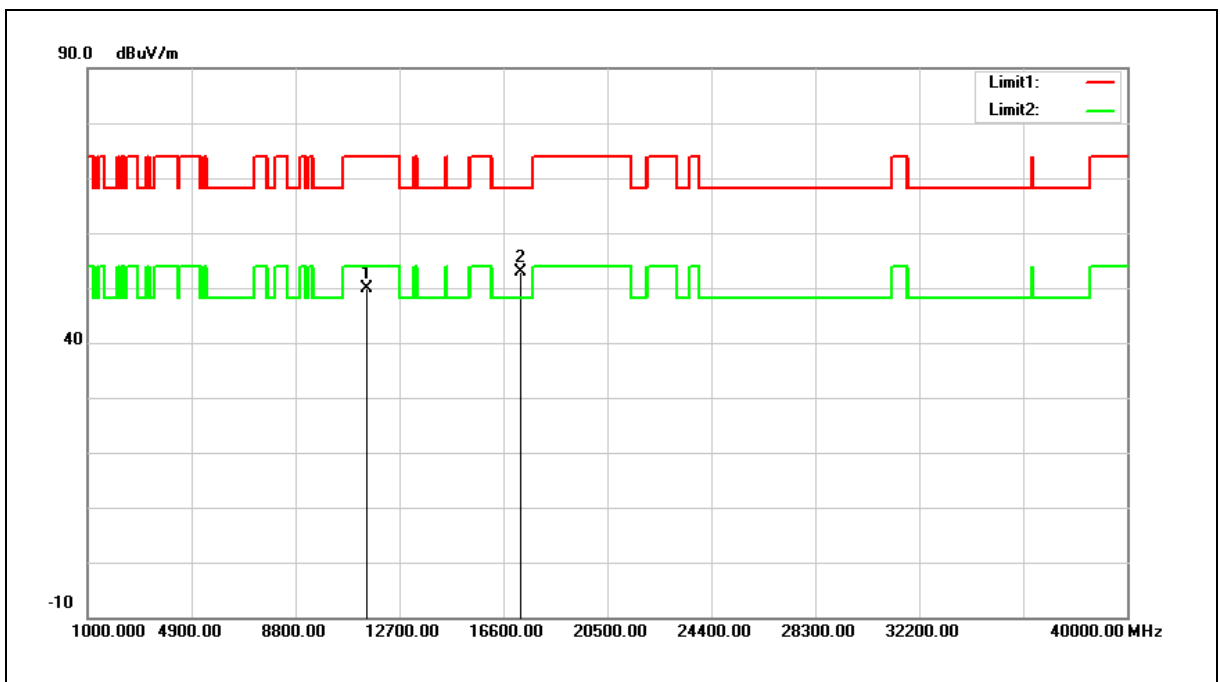


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	37.16	12.68	49.84	74.00	-24.16	peak
2	17235.000	34.35	18.52	52.87	68.20	-15.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

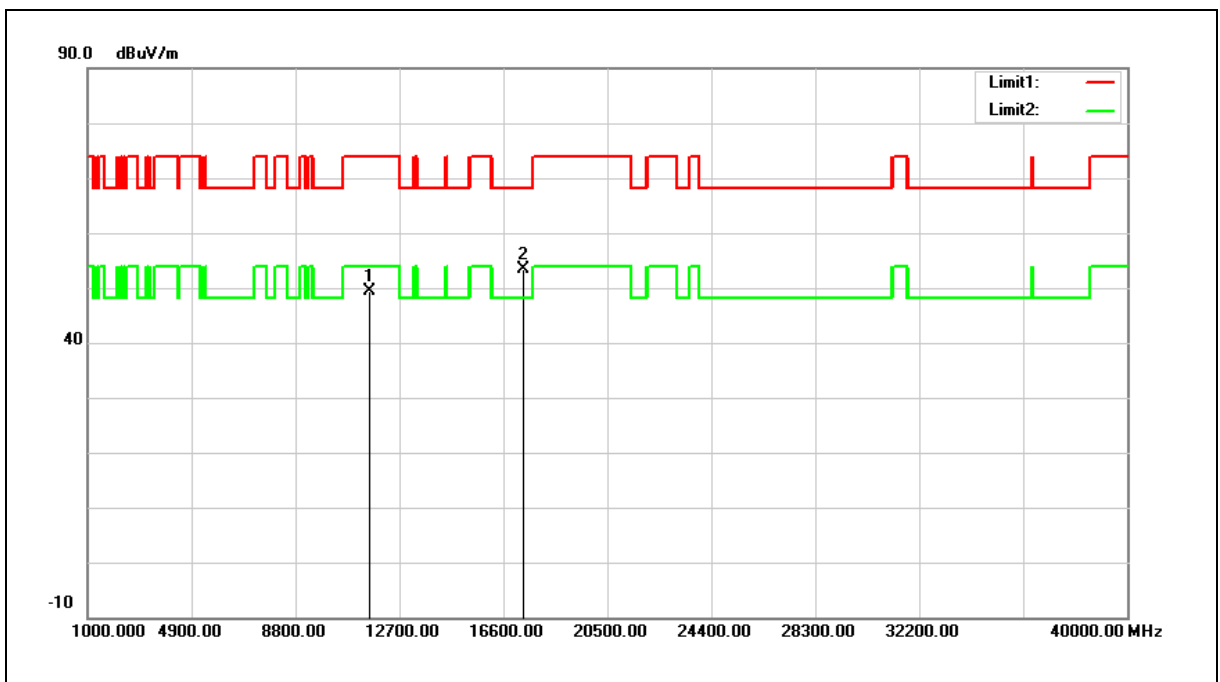


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.75	12.59	49.34	74.00	-24.66	peak
2	17355.000	34.14	19.32	53.46	68.20	-14.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

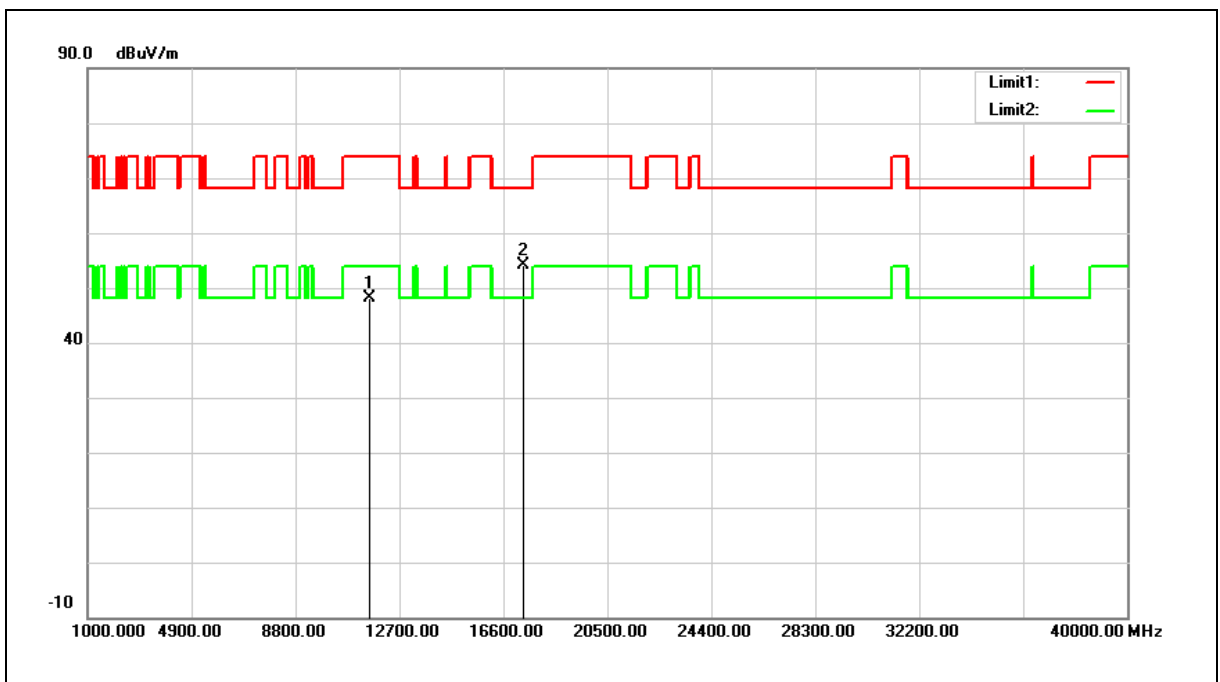


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.62	12.59	48.21	74.00	-25.79	peak
2	17355.000	34.77	19.32	54.09	68.20	-14.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

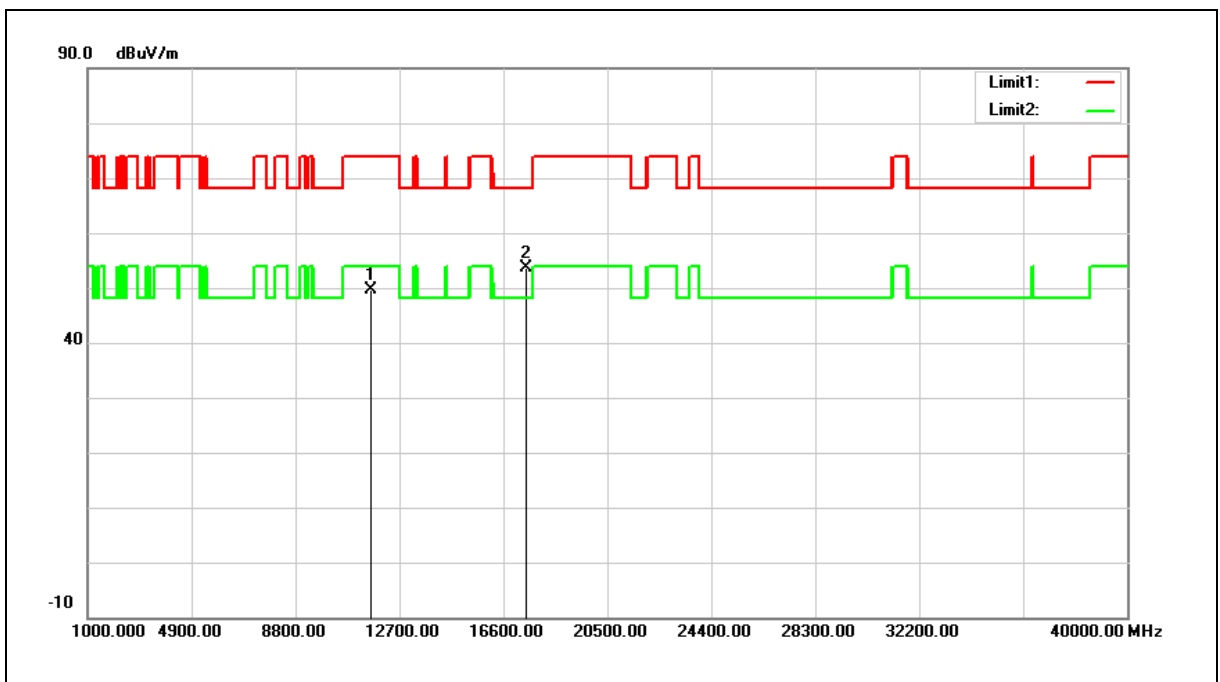


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	37.18	12.48	49.66	74.00	-24.34	peak
2	17475.000	33.59	20.13	53.72	68.20	-14.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

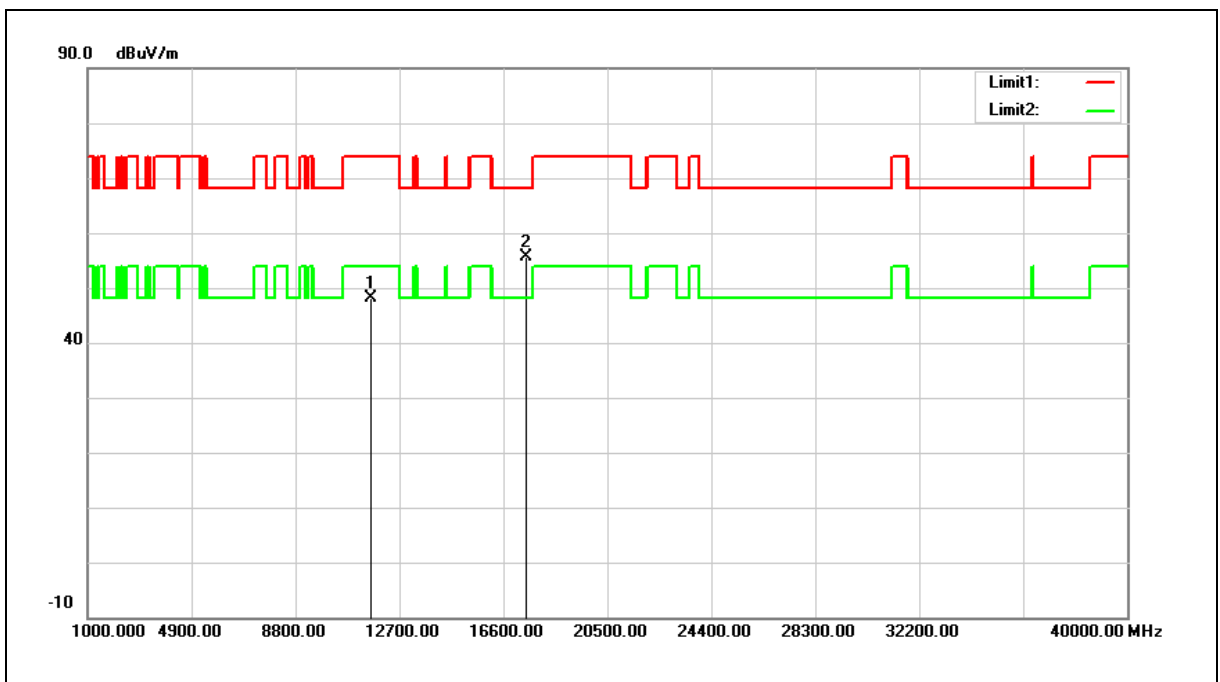


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.68	12.48	48.16	74.00	-25.84	peak
2	17475.000	35.47	20.13	55.60	68.20	-12.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

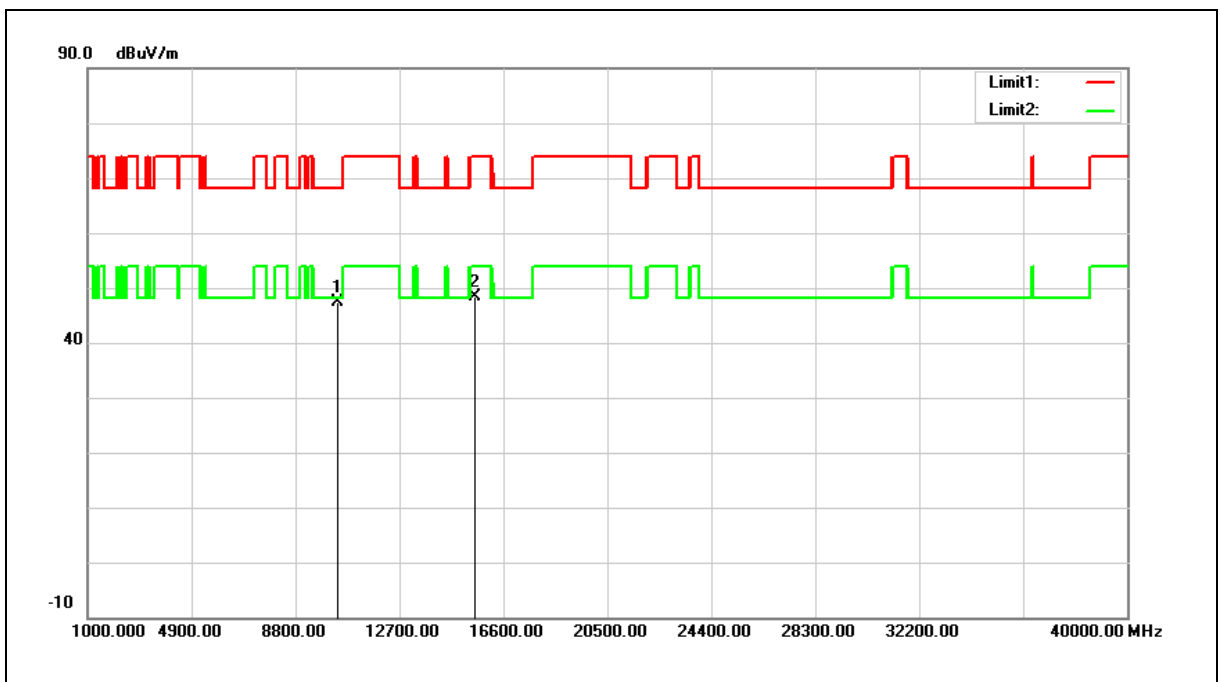


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.81	11.69	47.50	68.20	-20.70	peak
2	15540.000	33.89	14.52	48.41	74.00	-25.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

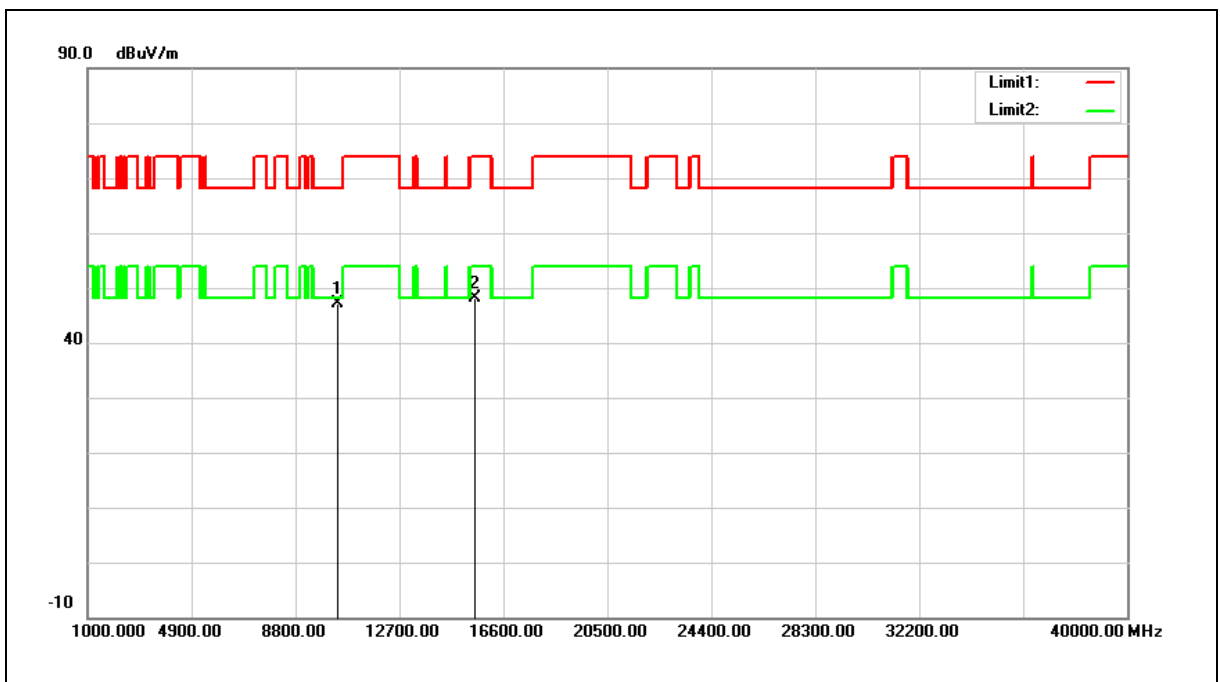


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.41	11.69	47.10	68.20	-21.10	peak
2	15540.000	33.69	14.52	48.21	74.00	-25.79	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

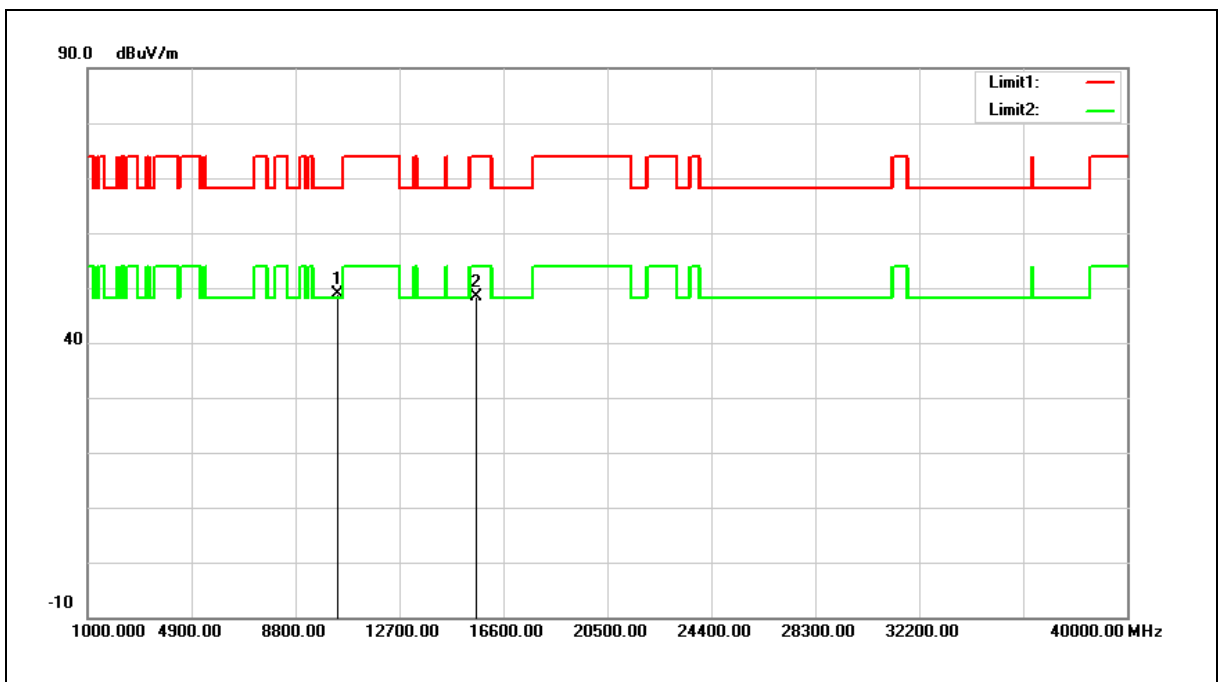


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	37.19	11.79	48.98	68.20	-19.22	peak
2	15600.000	34.05	14.39	48.44	74.00	-25.56	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

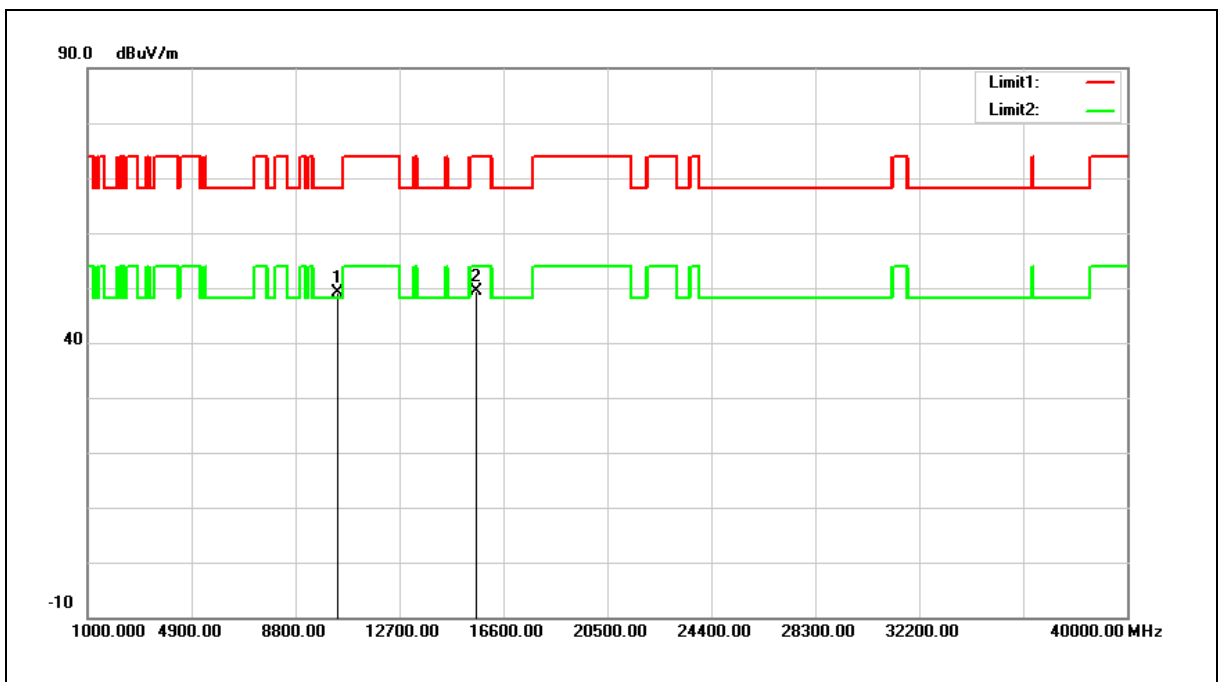


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	37.35	11.79	49.14	68.20	-19.06	peak
2	15600.000	34.90	14.39	49.29	74.00	-24.71	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

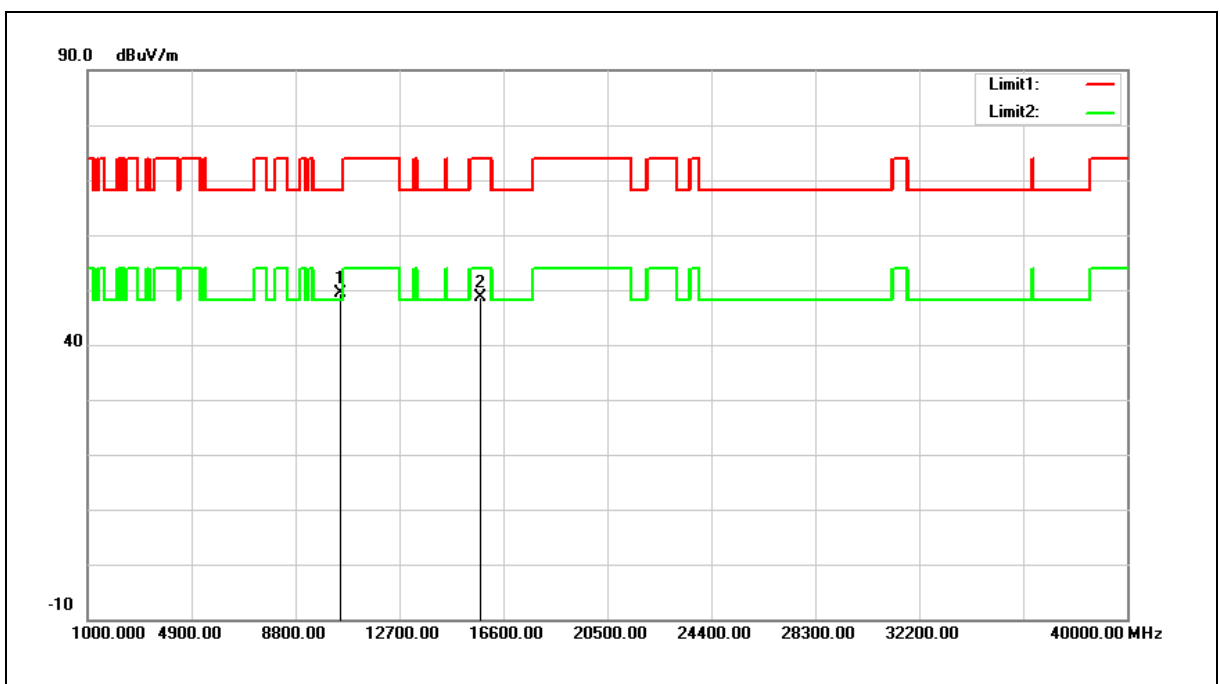


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	37.41	12.00	49.41	68.20	-18.79	peak
2	15720.000	34.52	14.13	48.65	74.00	-25.35	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

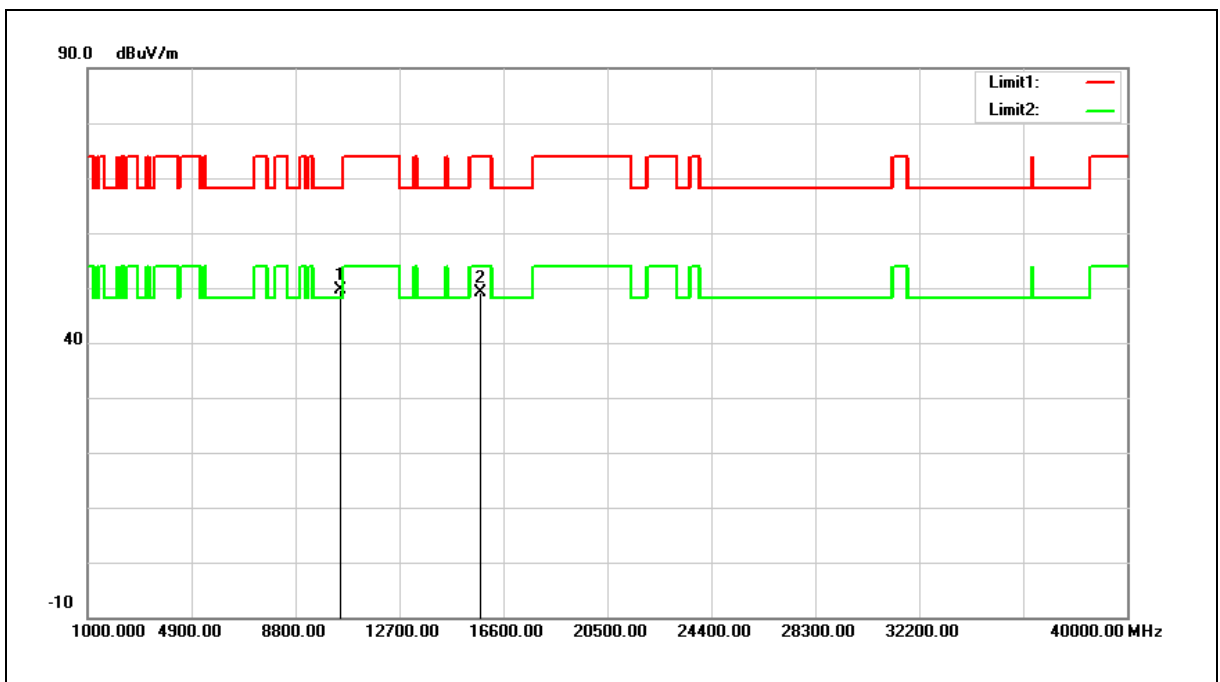


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	37.55	12.00	49.55	68.20	-18.65	peak
2	15720.000	34.96	14.13	49.09	74.00	-24.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

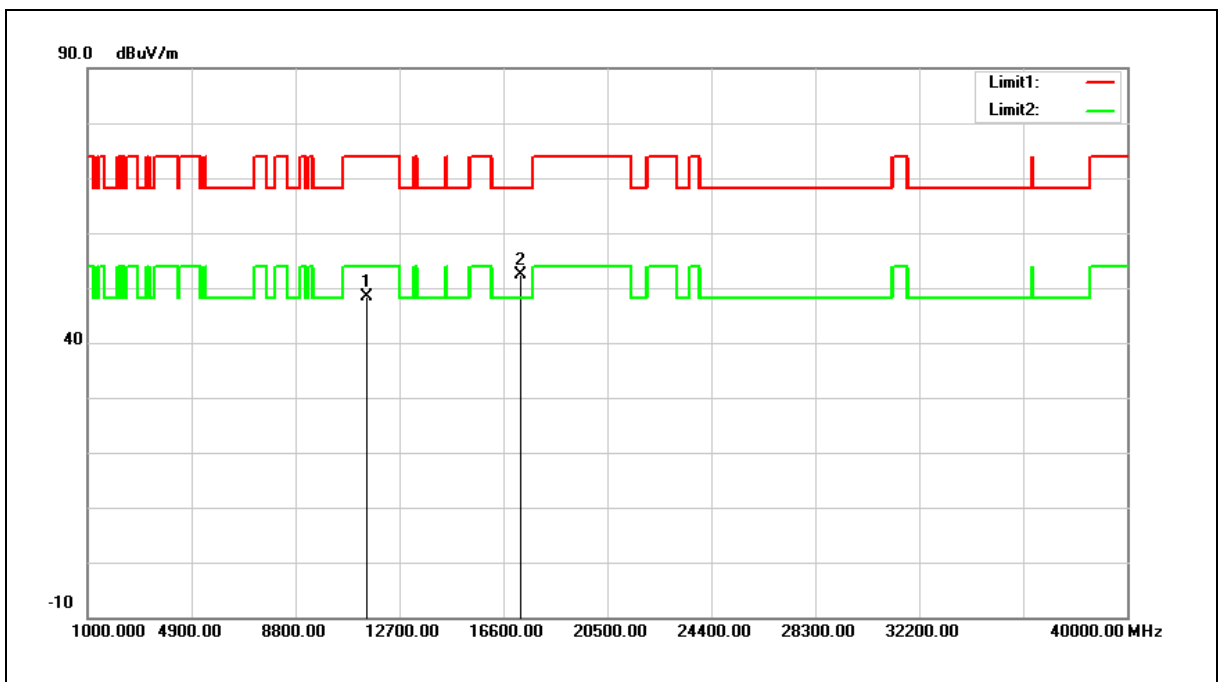


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.58	12.68	48.26	74.00	-25.74	peak
2	17235.000	33.74	18.52	52.26	68.20	-15.94	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

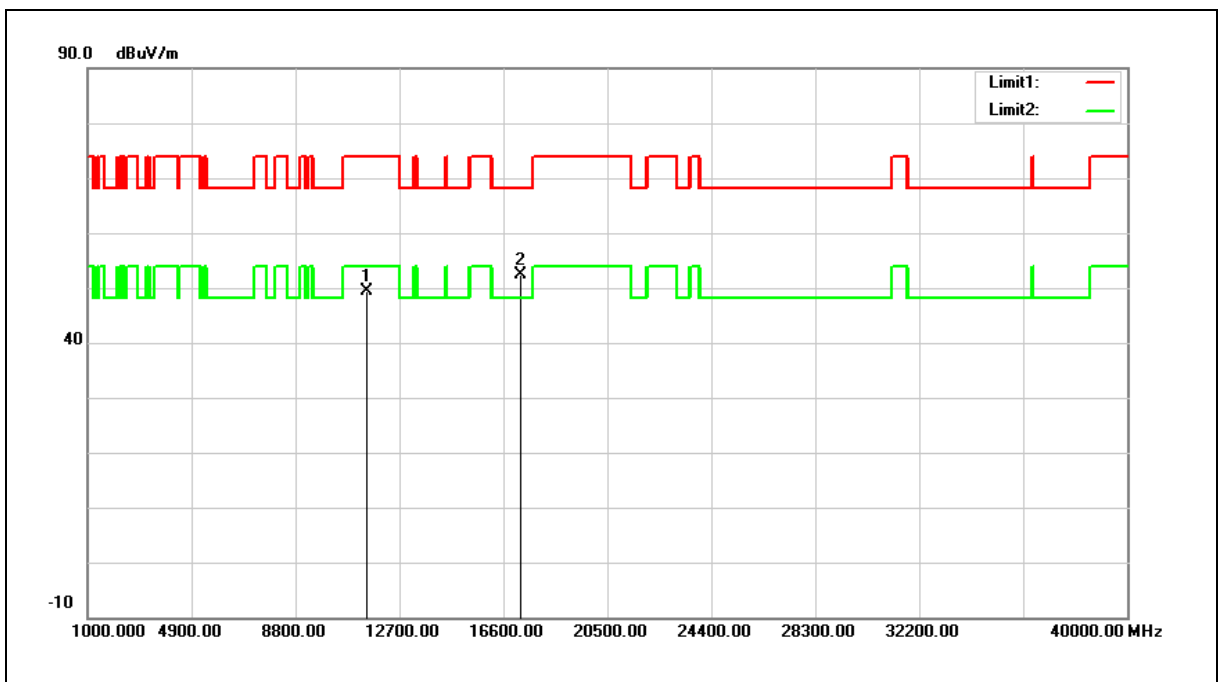


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.69	12.68	49.37	74.00	-24.63	peak
2	17235.000	33.81	18.52	52.33	68.20	-15.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

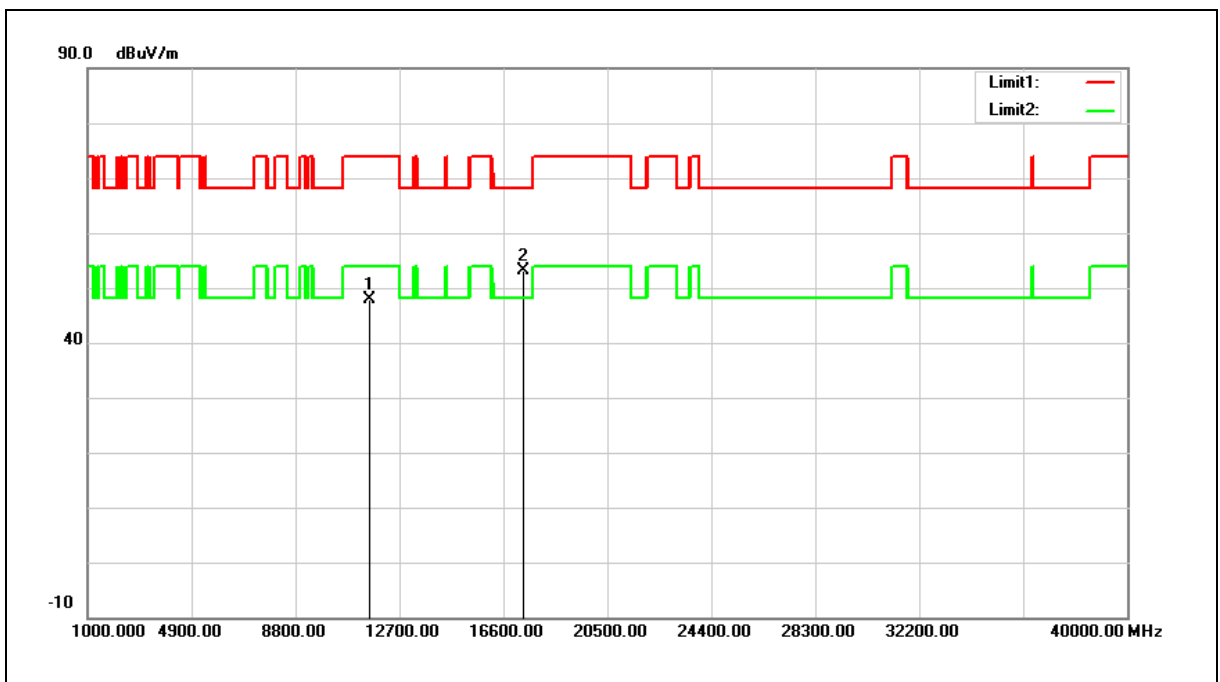


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.30	12.59	47.89	74.00	-26.11	peak
2	17355.000	33.75	19.32	53.07	68.20	-15.13	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

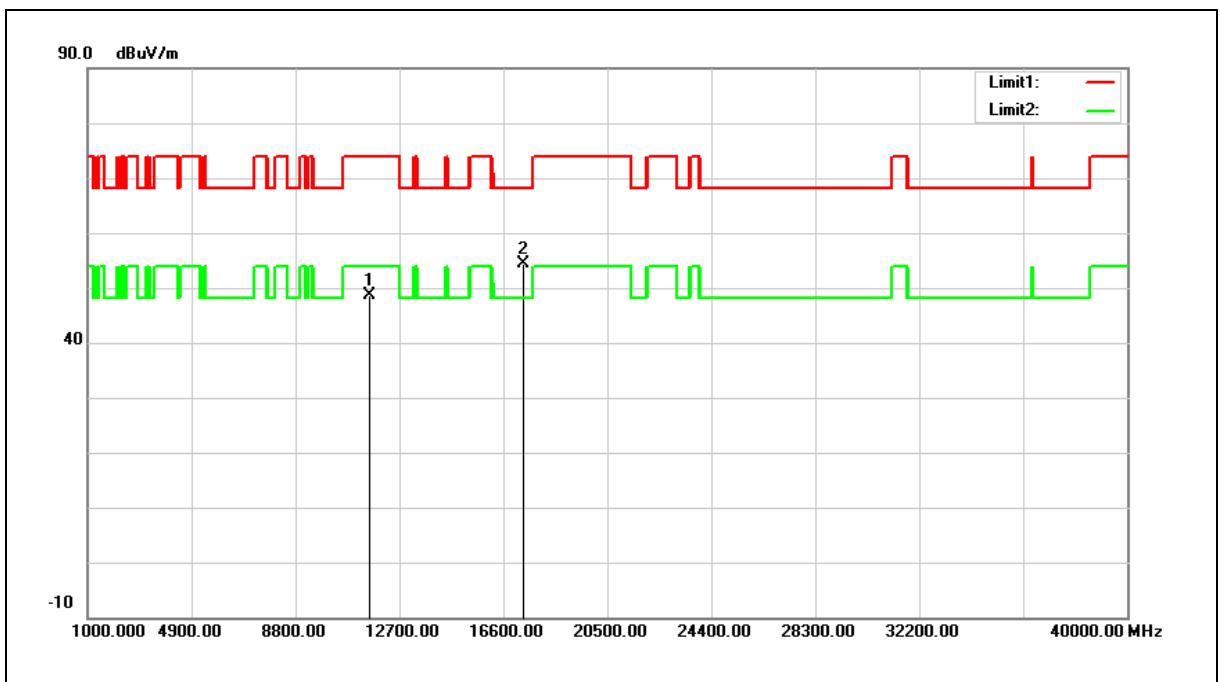


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.08	12.59	48.67	74.00	-25.33	peak
2	17355.000	35.14	19.32	54.46	68.20	-13.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

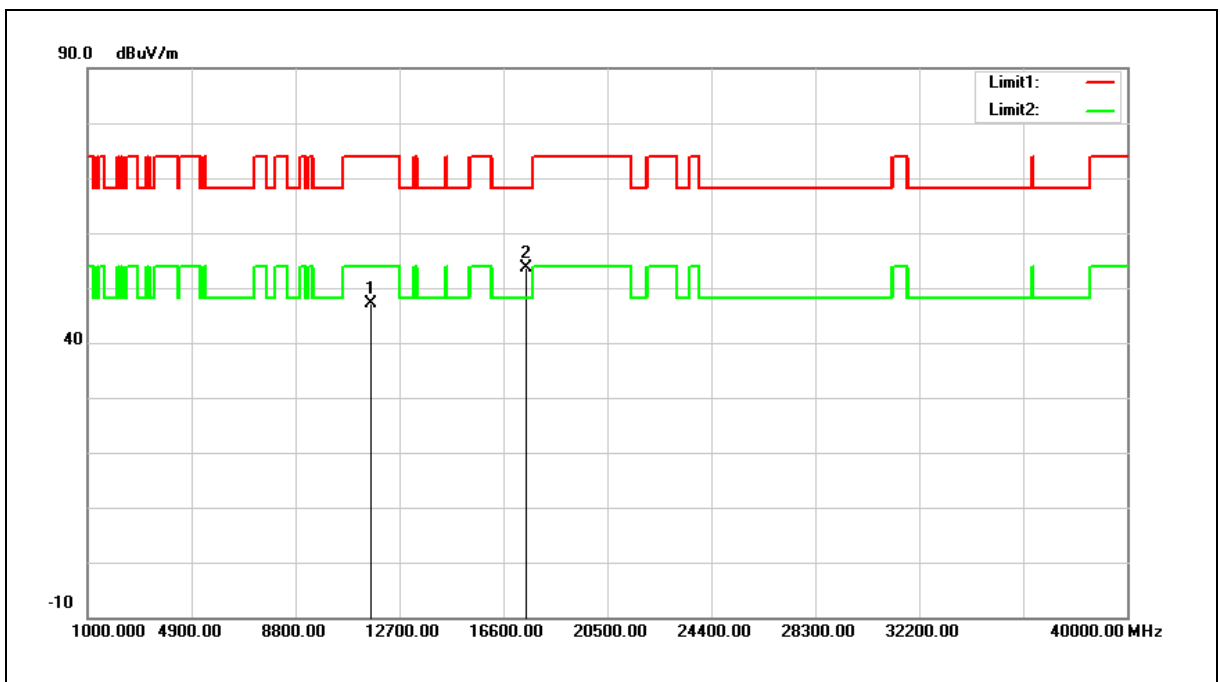


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.73	12.48	47.21	74.00	-26.79	peak
2	17475.000	33.40	20.13	53.53	68.20	-14.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

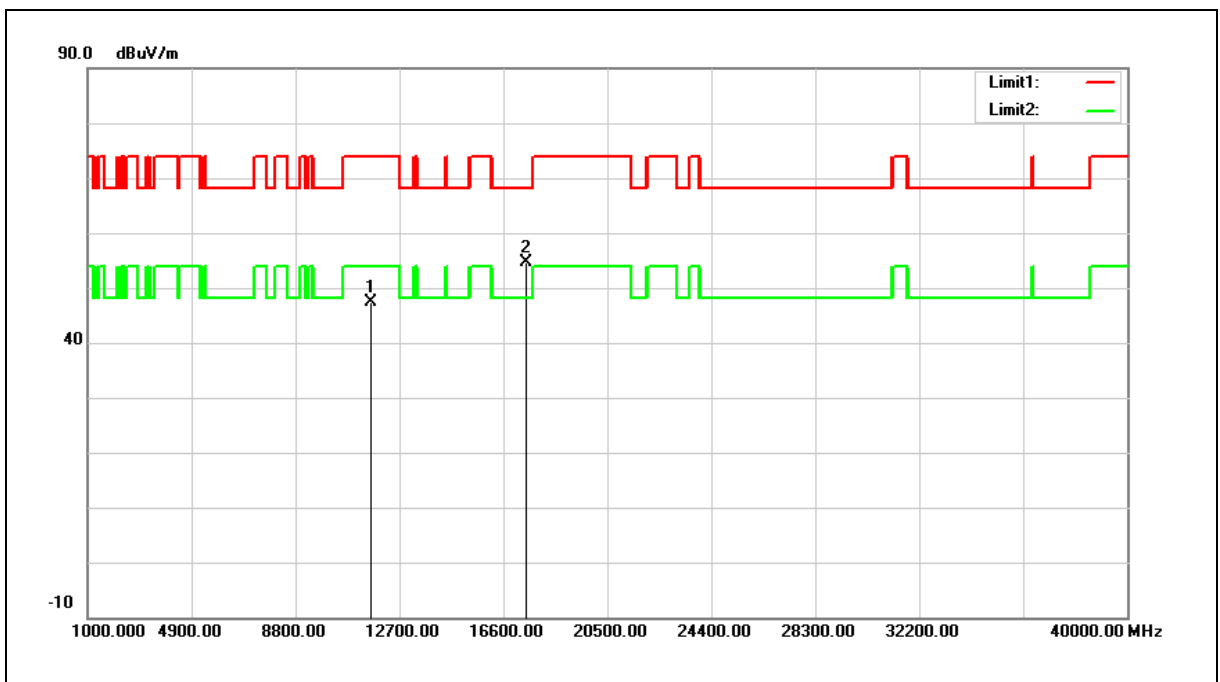


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.93	12.48	47.41	74.00	-26.59	peak
2	17475.000	34.41	20.13	54.54	68.20	-13.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

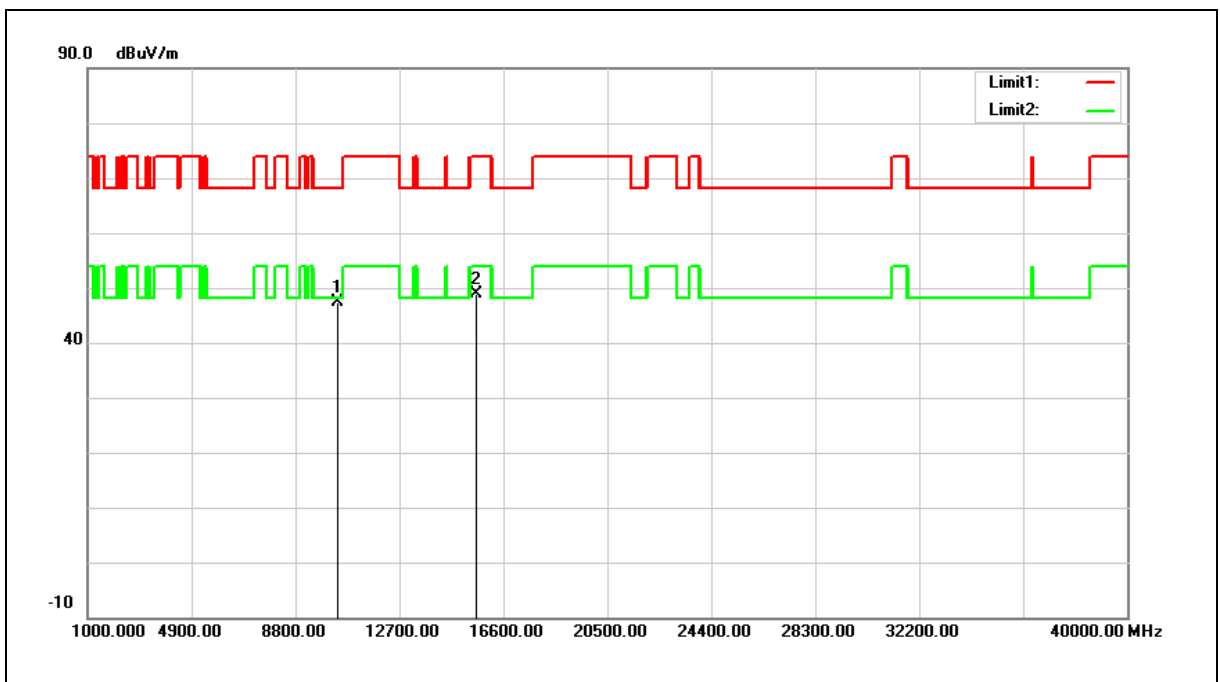


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.74	11.75	47.49	68.20	-20.71	peak
2	15570.000	34.40	14.45	48.85	74.00	-25.15	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

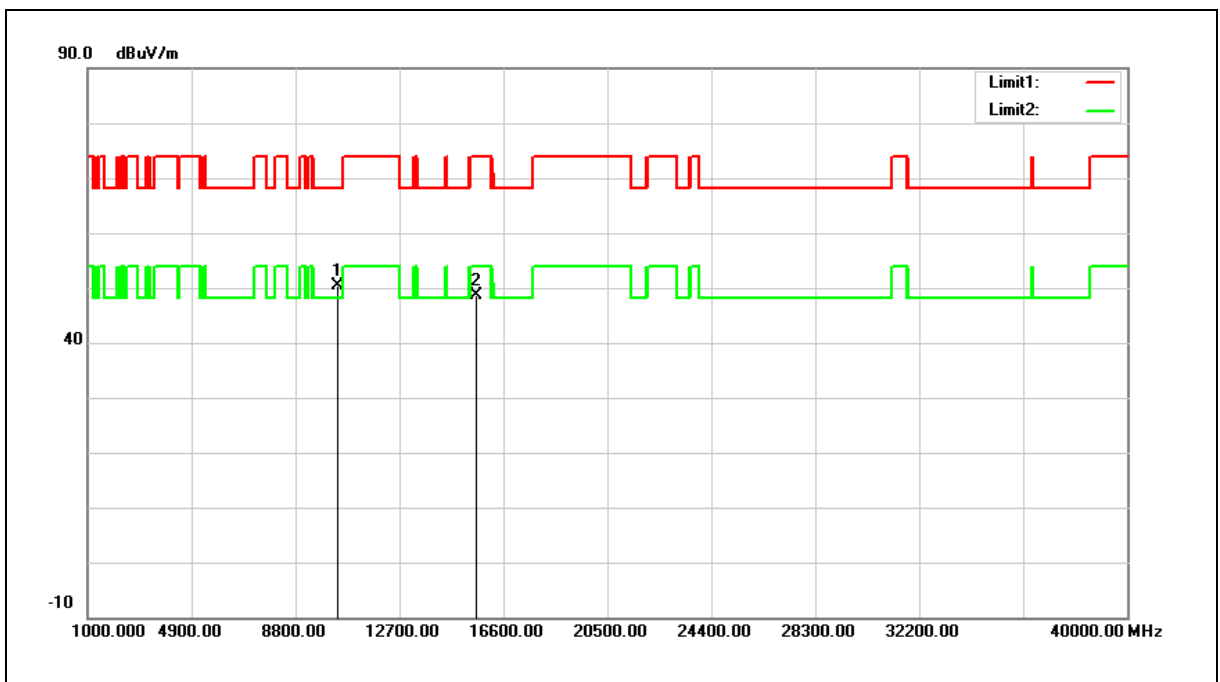


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	38.70	11.75	50.45	68.20	-17.75	peak
2	15570.000	34.23	14.45	48.68	74.00	-25.32	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

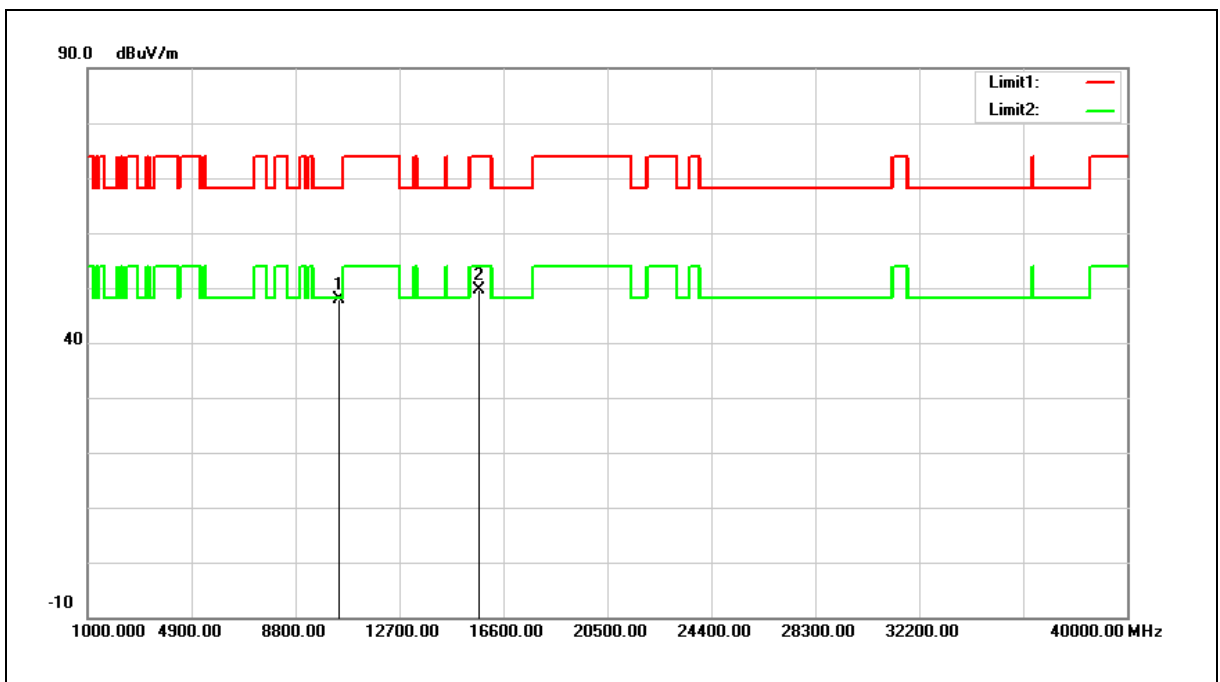


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.89	11.95	47.84	68.20	-20.36	peak
2	15690.000	35.41	14.19	49.60	74.00	-24.40	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

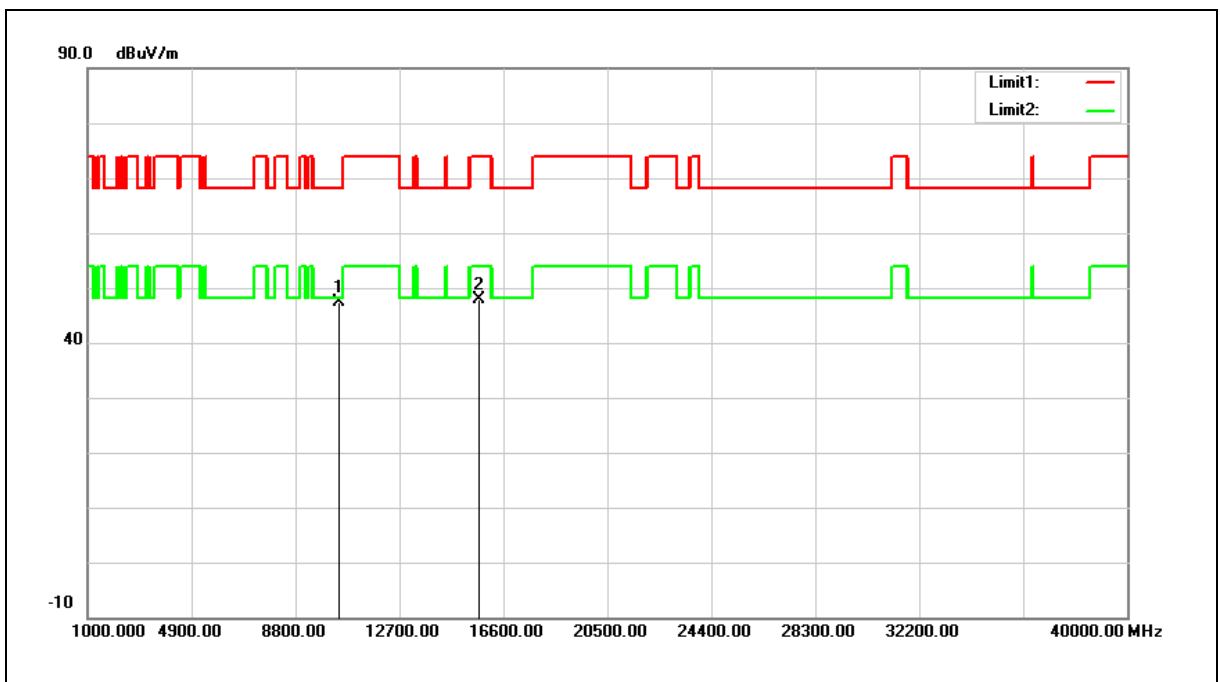


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.36	11.95	47.31	68.20	-20.89	peak
2	15690.000	33.72	14.19	47.91	74.00	-26.09	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

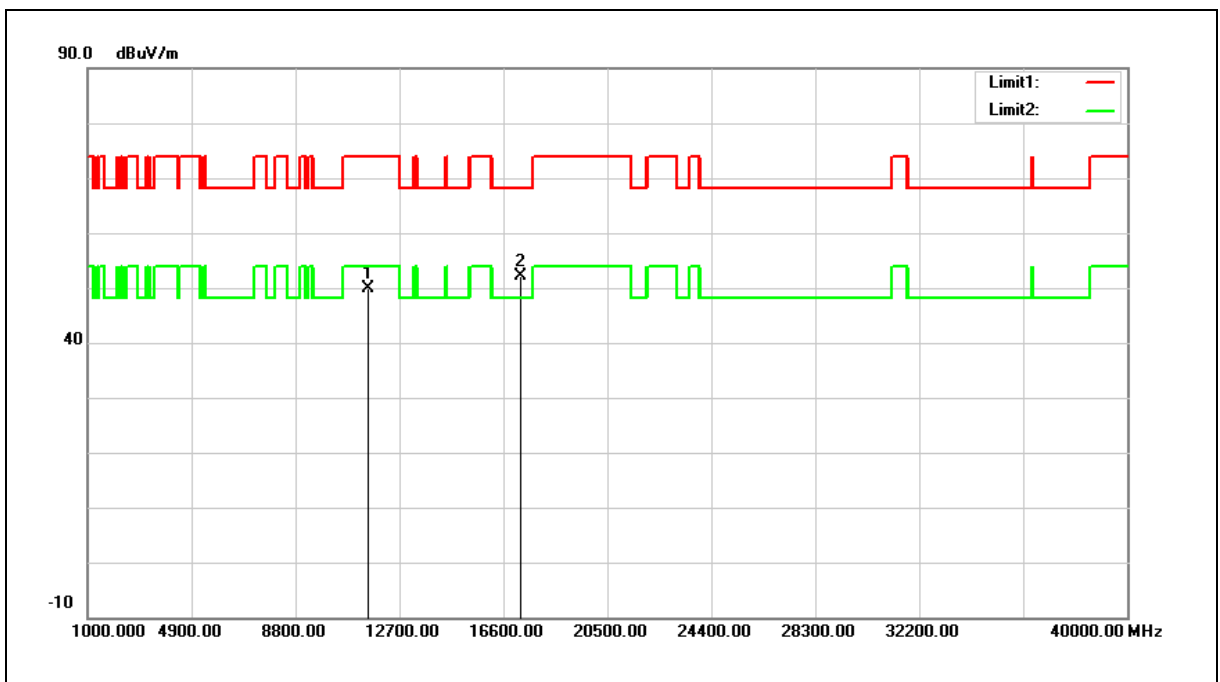


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	37.10	12.68	49.78	74.00	-24.22	peak
2	17265.000	33.43	18.72	52.15	68.20	-16.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

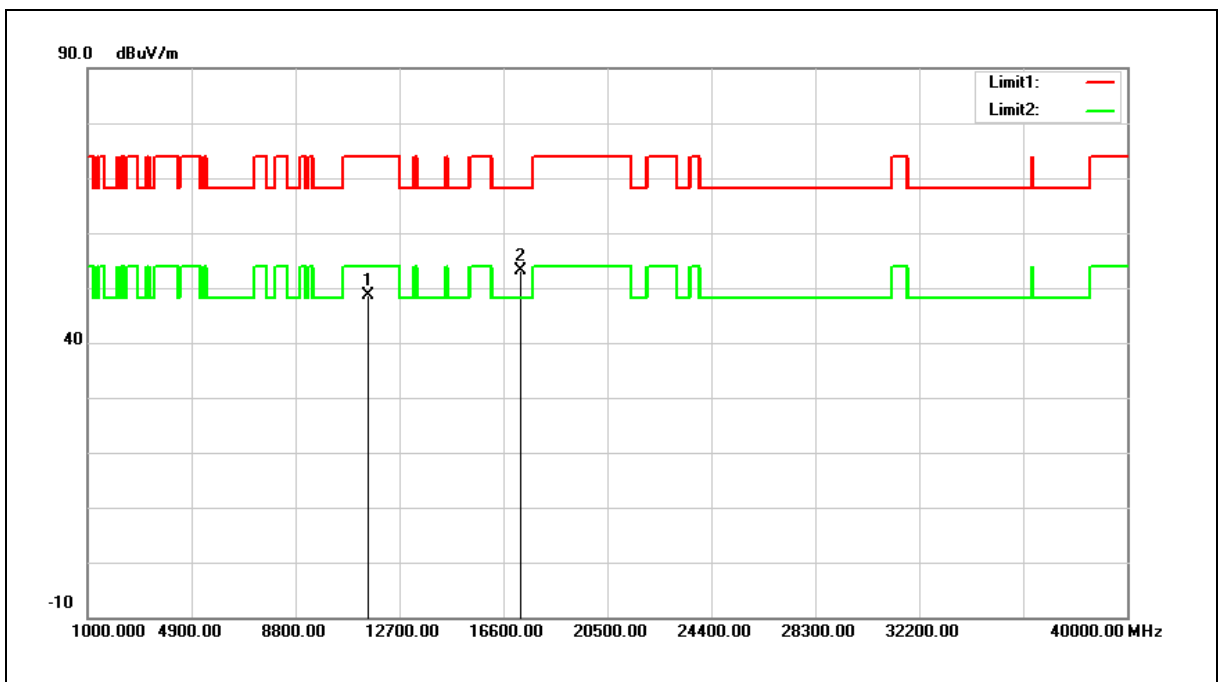


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.98	12.68	48.66	74.00	-25.34	peak
2	17265.000	34.48	18.72	53.20	68.20	-15.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

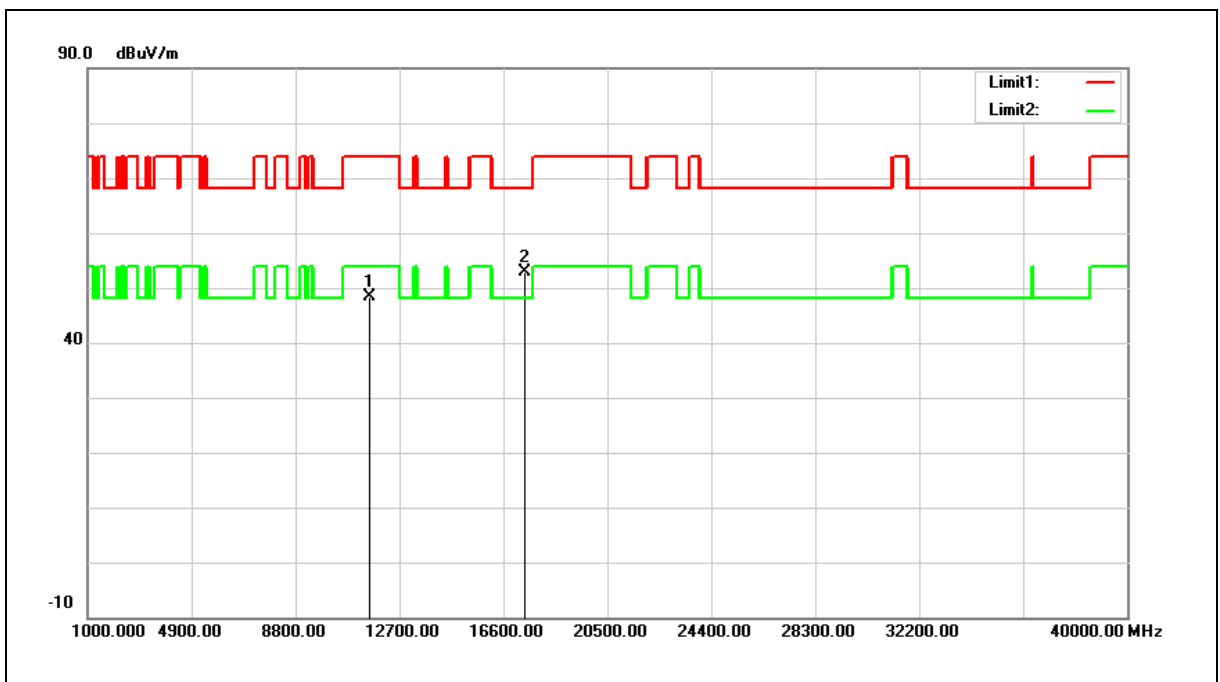


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.72	12.56	48.28	74.00	-25.72	peak
2	17385.000	33.28	19.52	52.80	68.20	-15.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

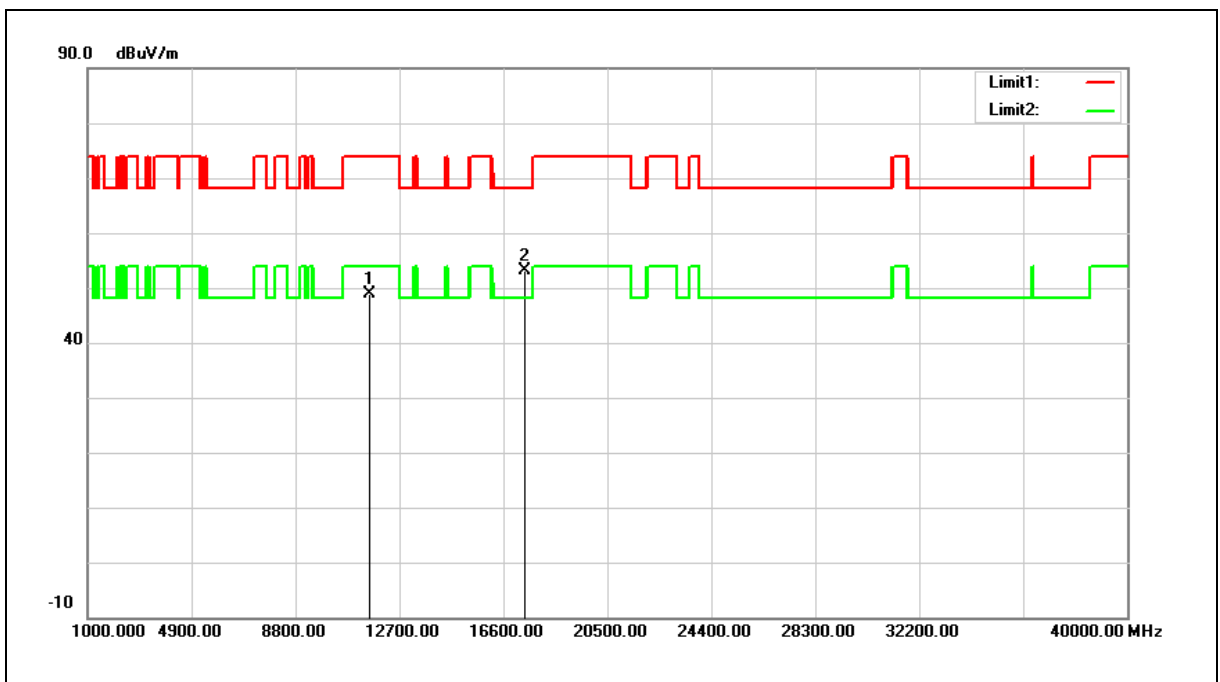


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	36.26	12.56	48.82	74.00	-25.18	peak
2	17385.000	33.51	19.52	53.03	68.20	-15.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

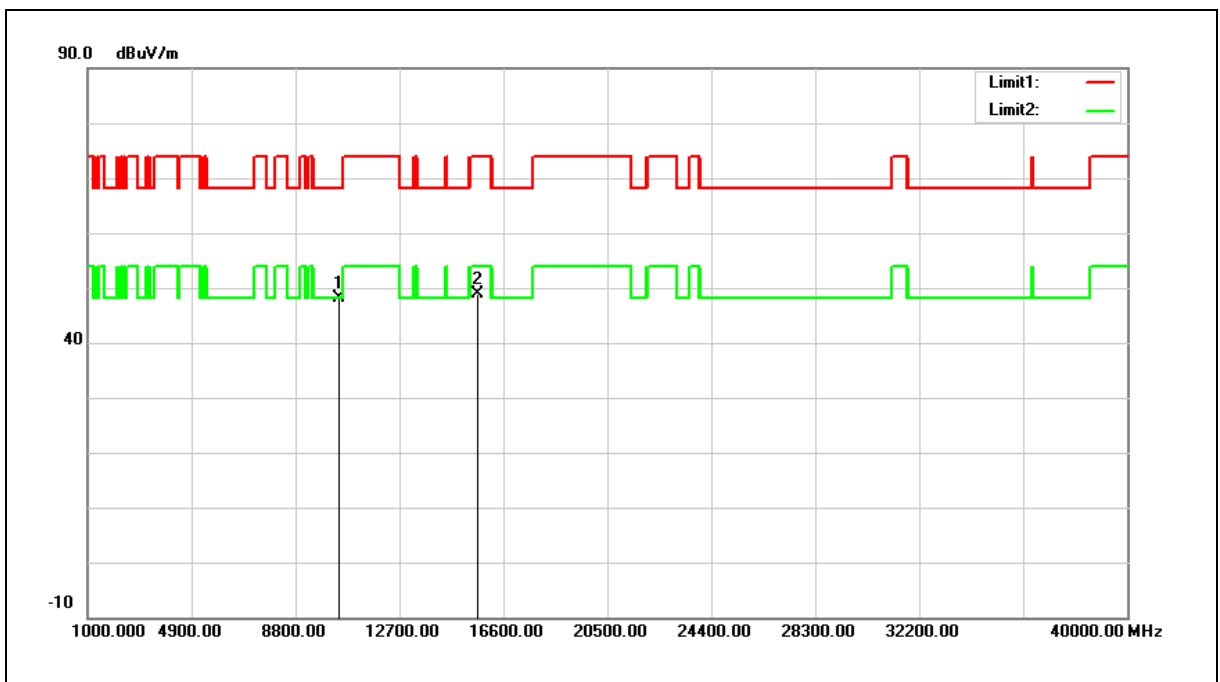


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.18	11.85	48.03	68.20	-20.17	peak
2	15630.000	34.53	14.33	48.86	74.00	-25.14	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

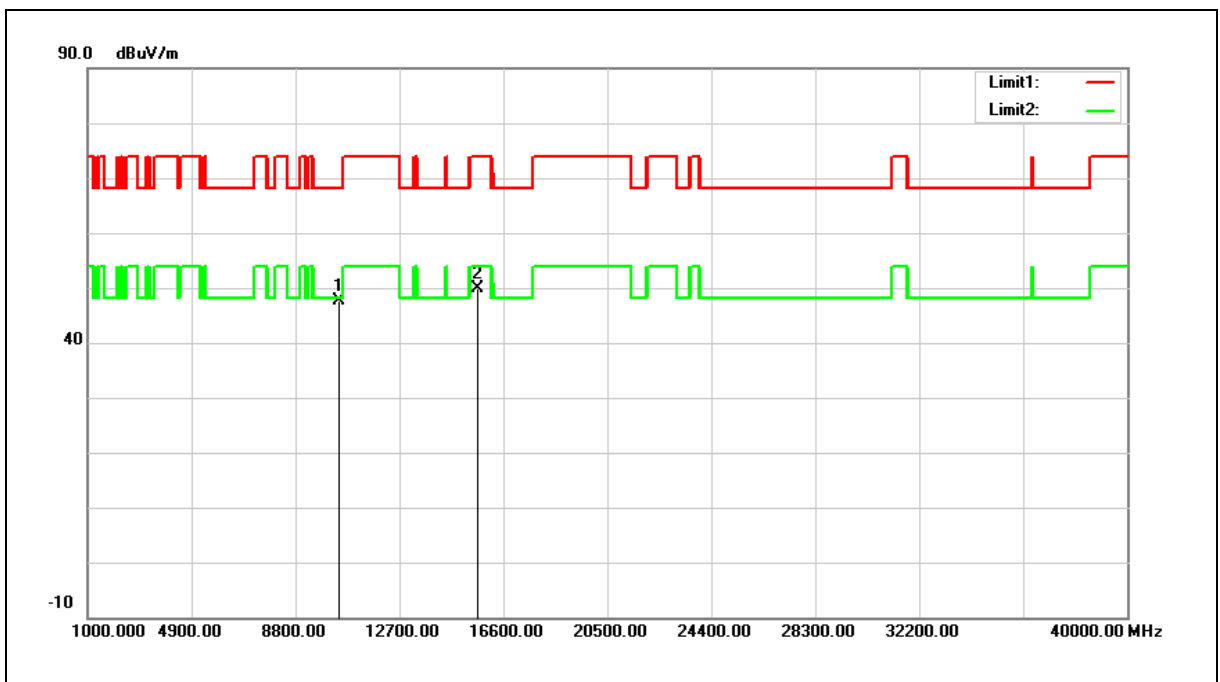


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	35.82	11.85	47.67	68.20	-20.53	peak
2	15630.000	35.48	14.33	49.81	74.00	-24.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

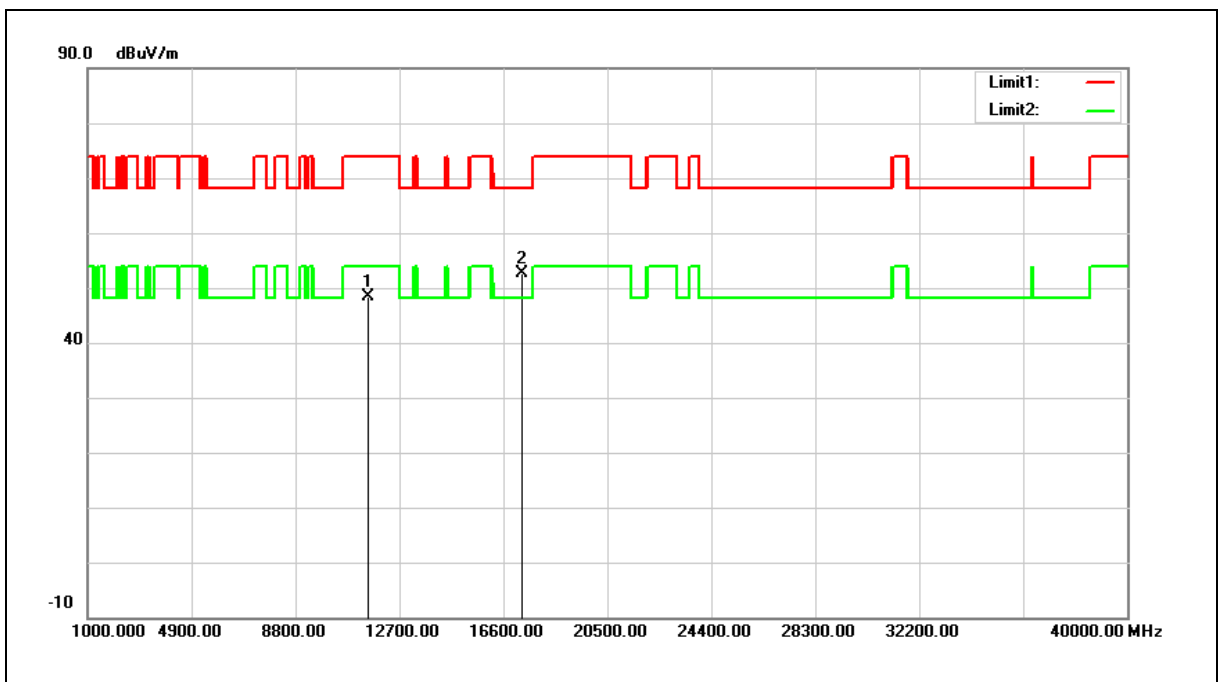


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.79	12.62	48.41	74.00	-25.59	peak
2	17325.000	33.54	19.12	52.66	68.20	-15.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

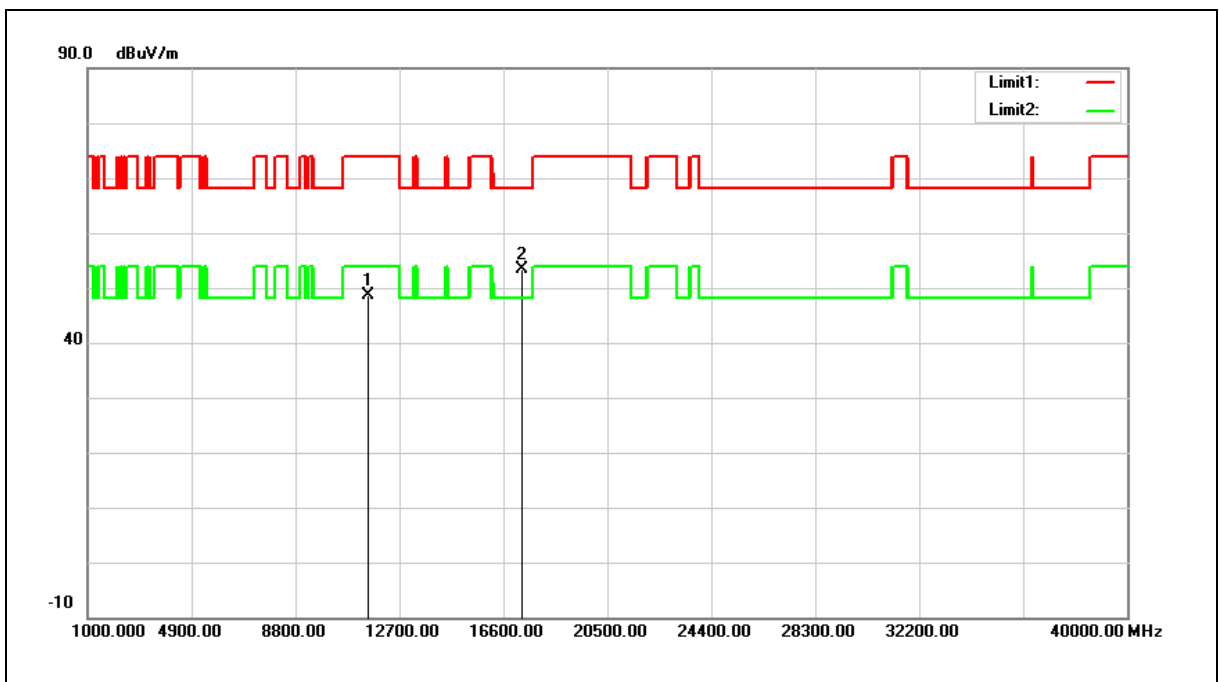


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.93	12.62	48.55	74.00	-25.45	peak
2	17325.000	34.33	19.12	53.45	68.20	-14.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

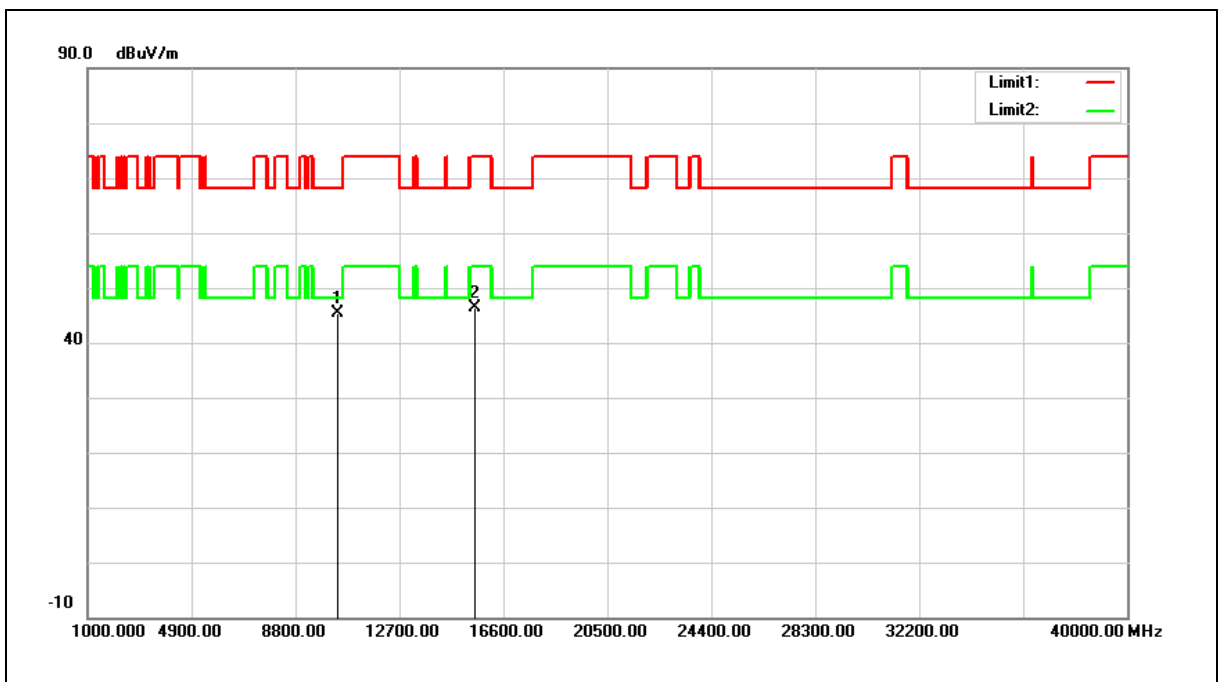


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	33.73	11.69	45.42	68.20	-22.78	peak
2	15540.000	31.74	14.52	46.26	74.00	-27.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

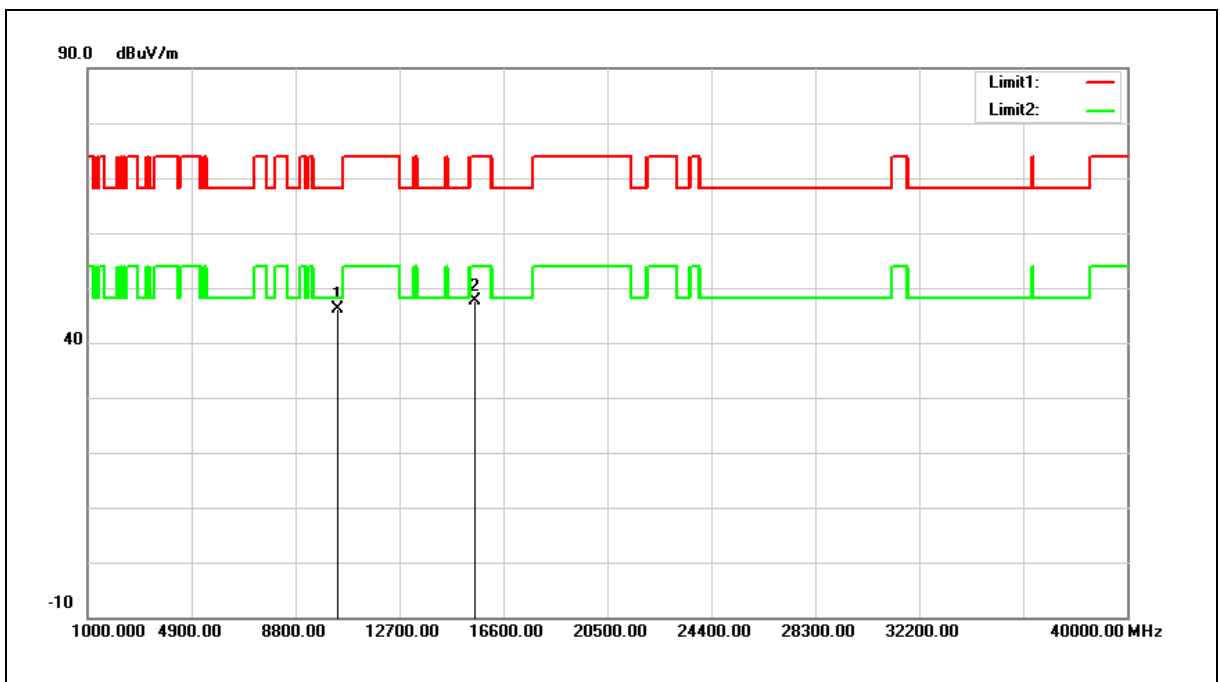


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.43	11.69	46.12	68.20	-22.08	peak
2	15540.000	33.14	14.52	47.66	74.00	-26.34	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

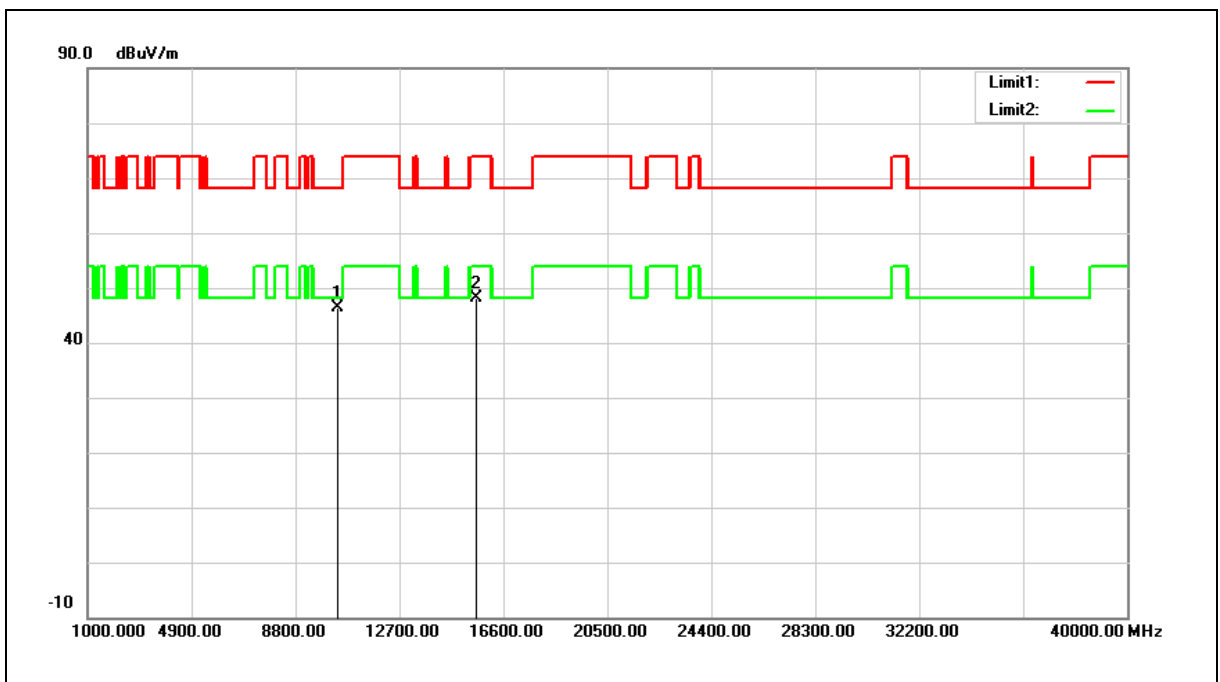


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.47	11.79	46.26	68.20	-21.94	peak
2	15600.000	33.65	14.39	48.04	74.00	-25.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

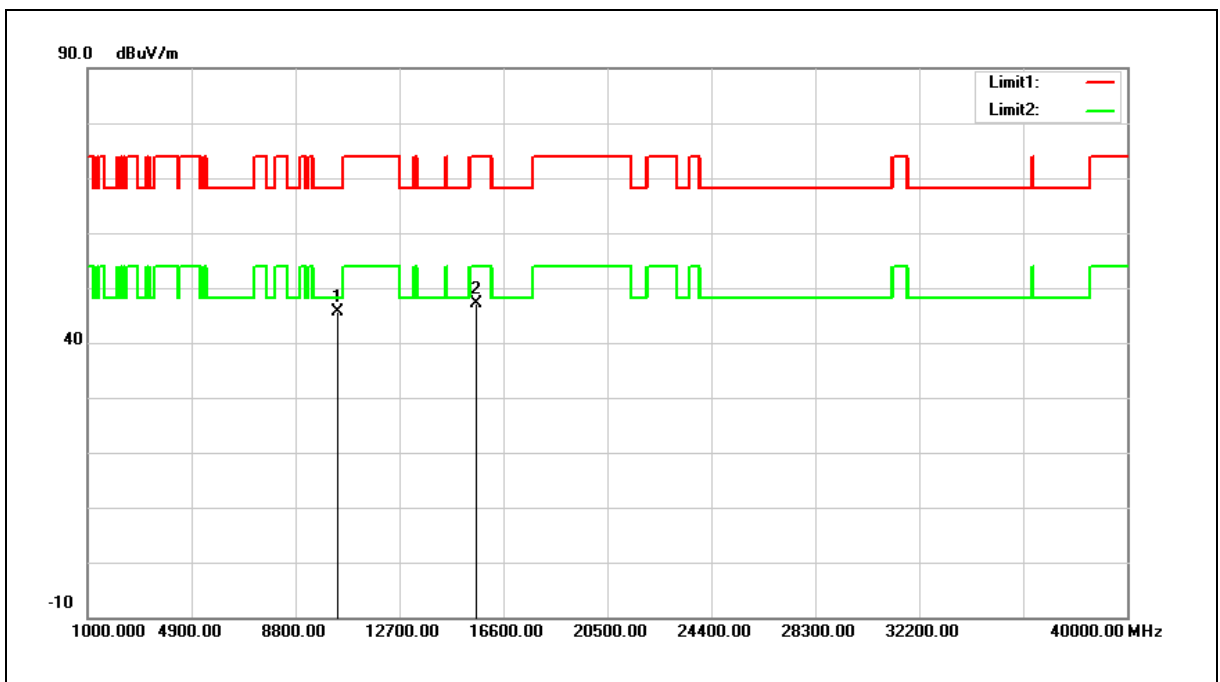


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	33.79	11.79	45.58	68.20	-22.62	peak
2	15600.000	32.76	14.39	47.15	74.00	-26.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

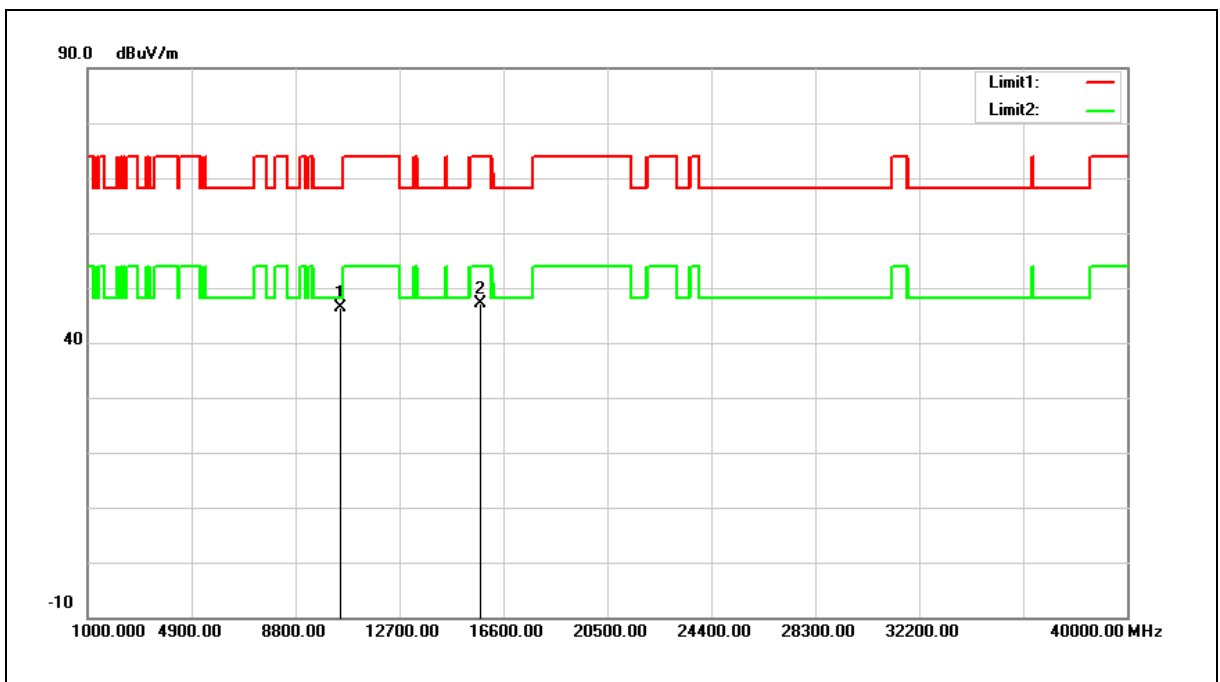


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.26	12.00	46.26	68.20	-21.94	peak
2	15720.000	33.11	14.13	47.24	74.00	-26.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

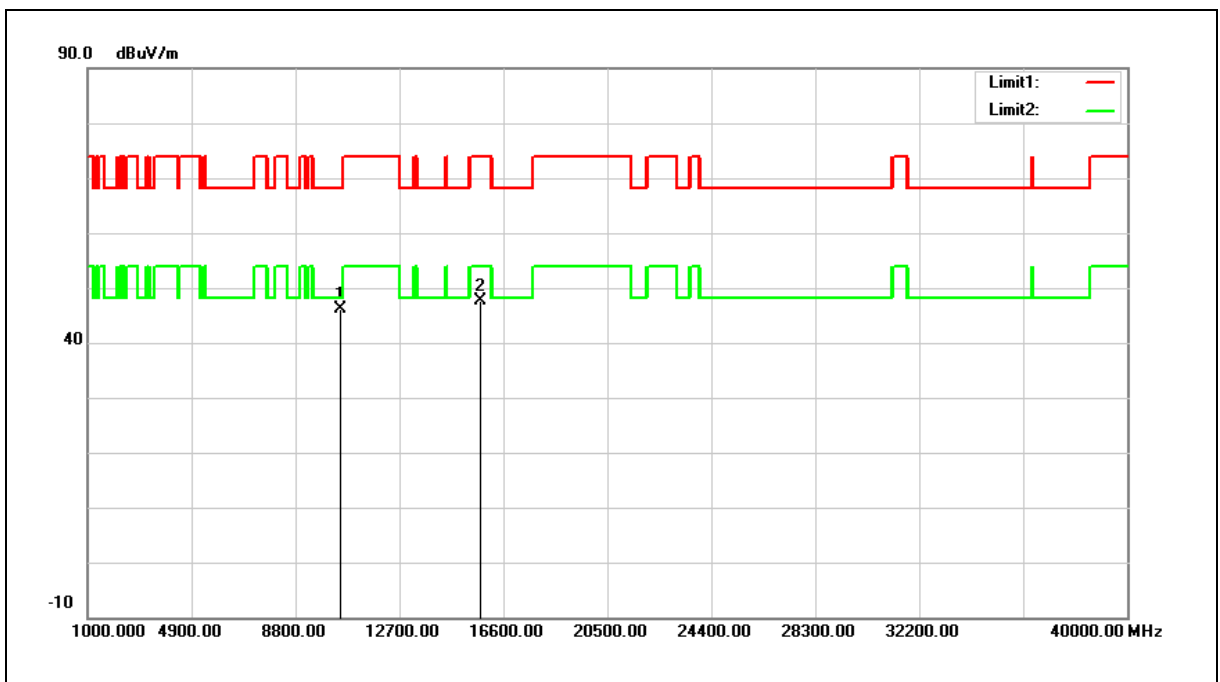


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.21	12.00	46.21	68.20	-21.99	peak
2	15720.000	33.42	14.13	47.55	74.00	-26.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

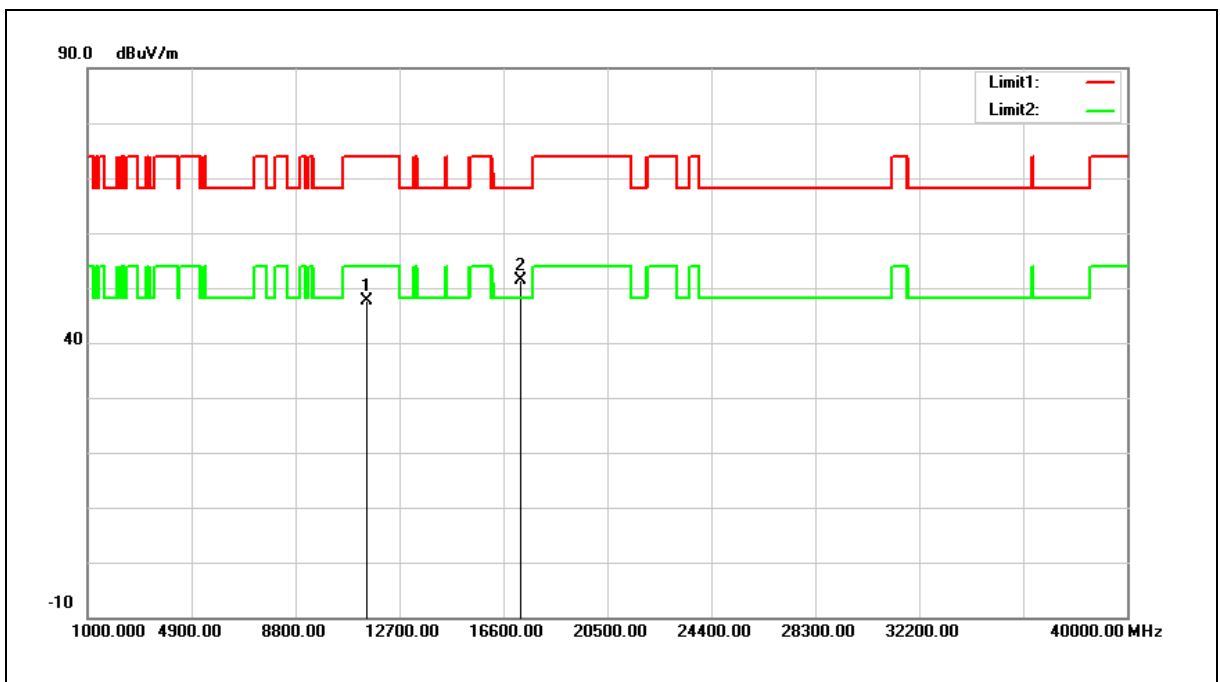


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.86	12.68	47.54	74.00	-26.46	peak
2	17235.000	32.76	18.52	51.28	68.20	-16.92	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

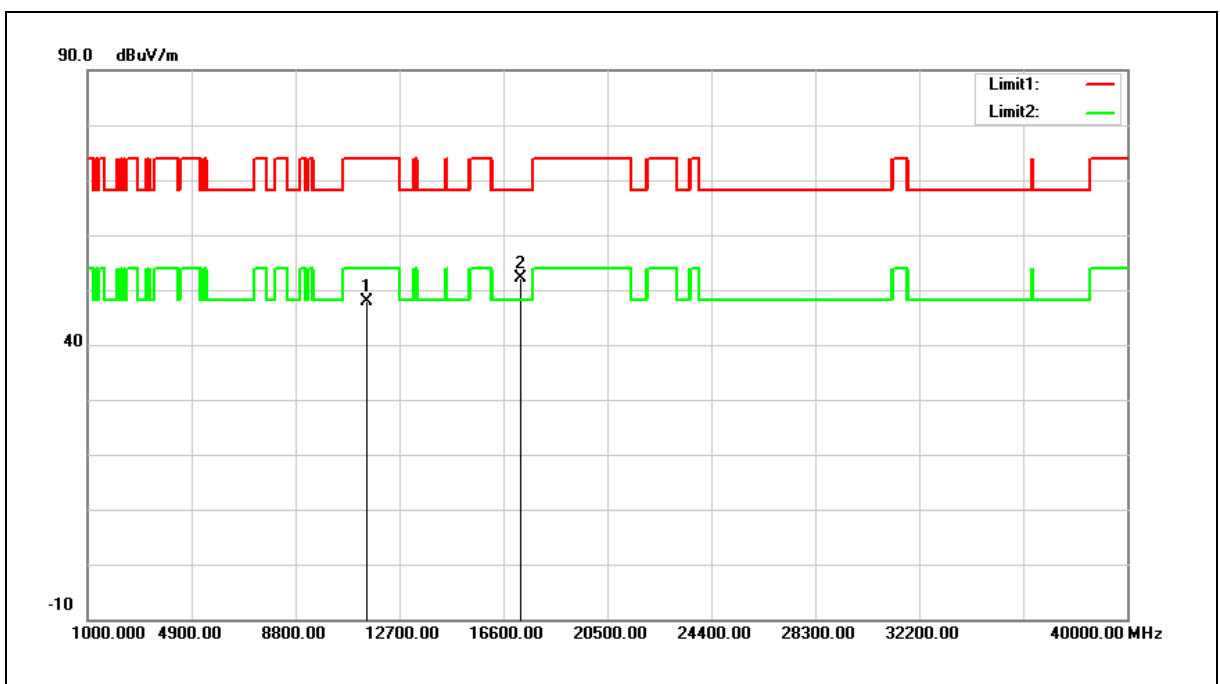


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.18	12.68	47.86	74.00	-26.14	peak
2	17235.000	33.51	18.52	52.03	68.20	-16.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

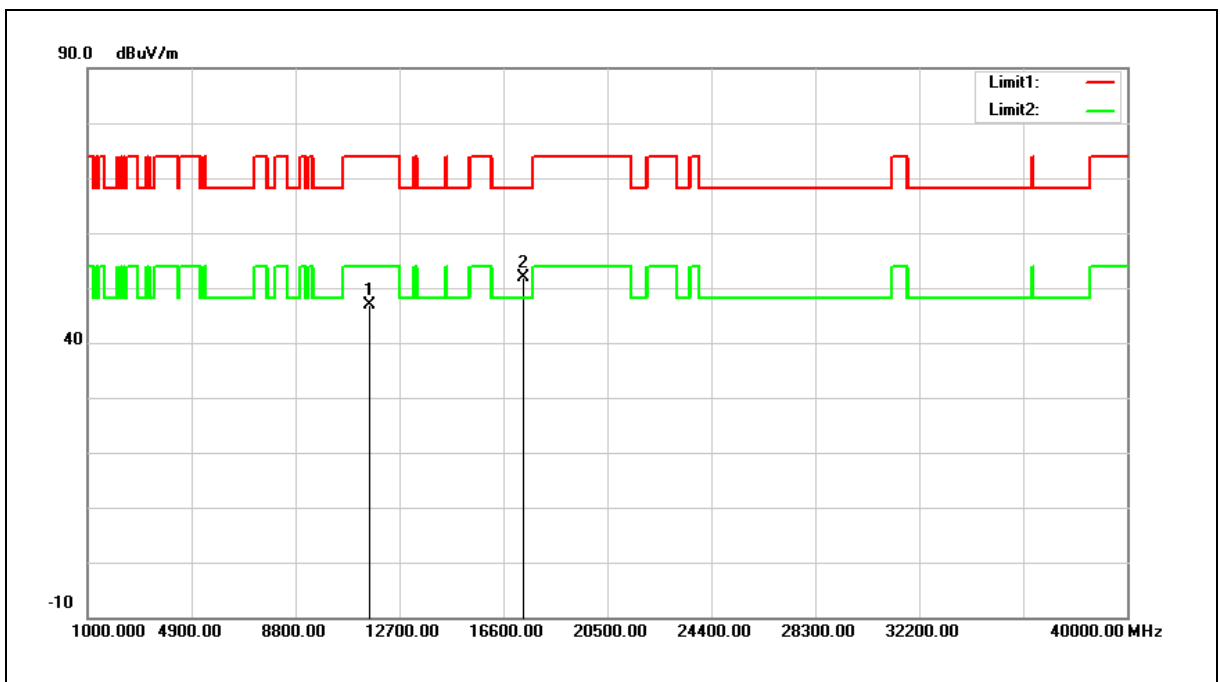


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.34	12.59	46.93	74.00	-27.07	peak
2	17355.000	32.62	19.32	51.94	68.20	-16.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

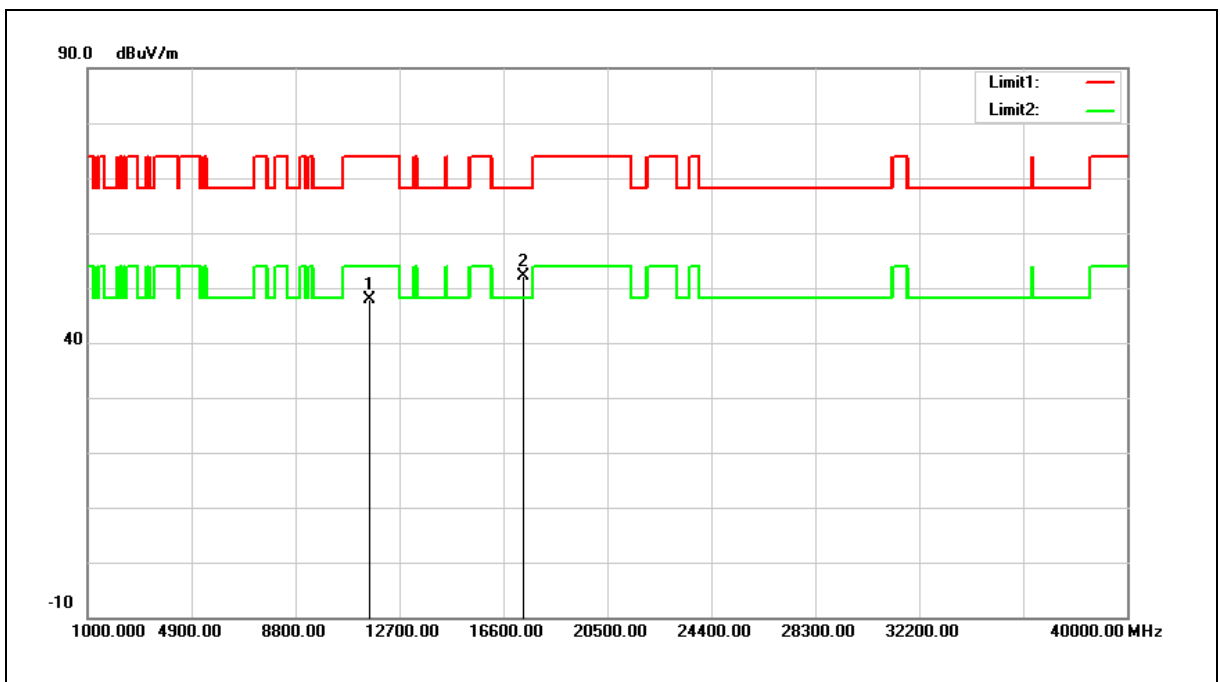


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.19	12.59	47.78	74.00	-26.22	peak
2	17355.000	32.80	19.32	52.12	68.20	-16.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

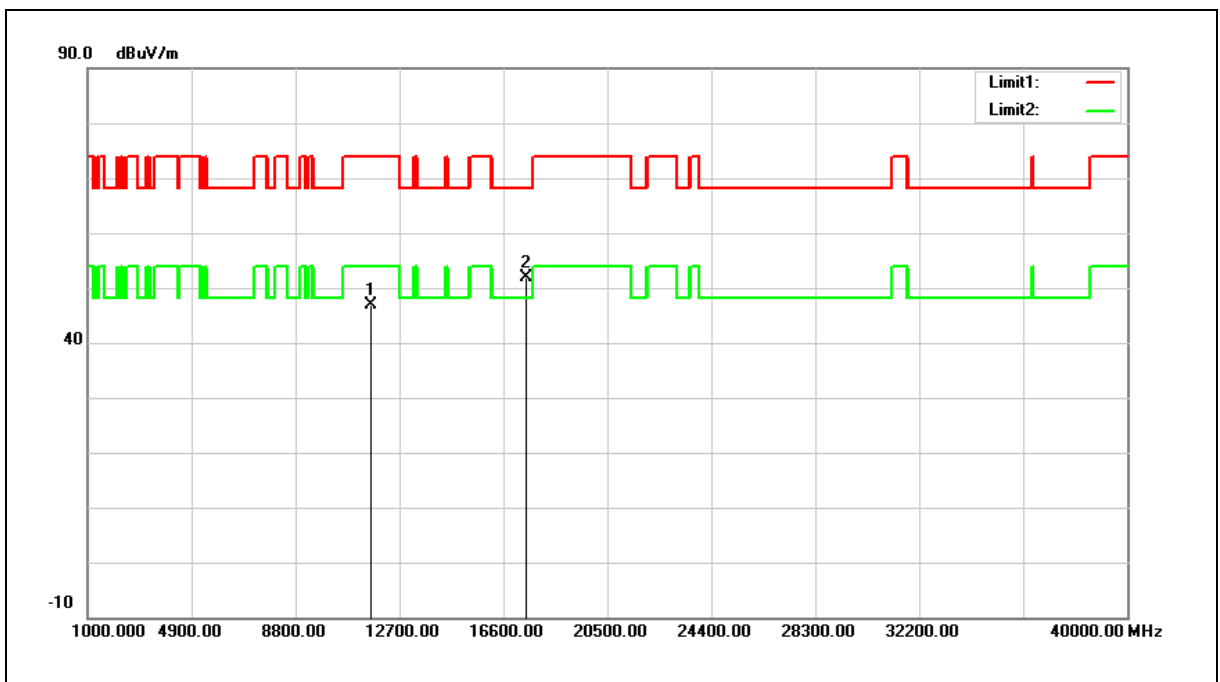


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.33	12.48	46.81	74.00	-27.19	peak
2	17475.000	31.74	20.13	51.87	68.20	-16.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

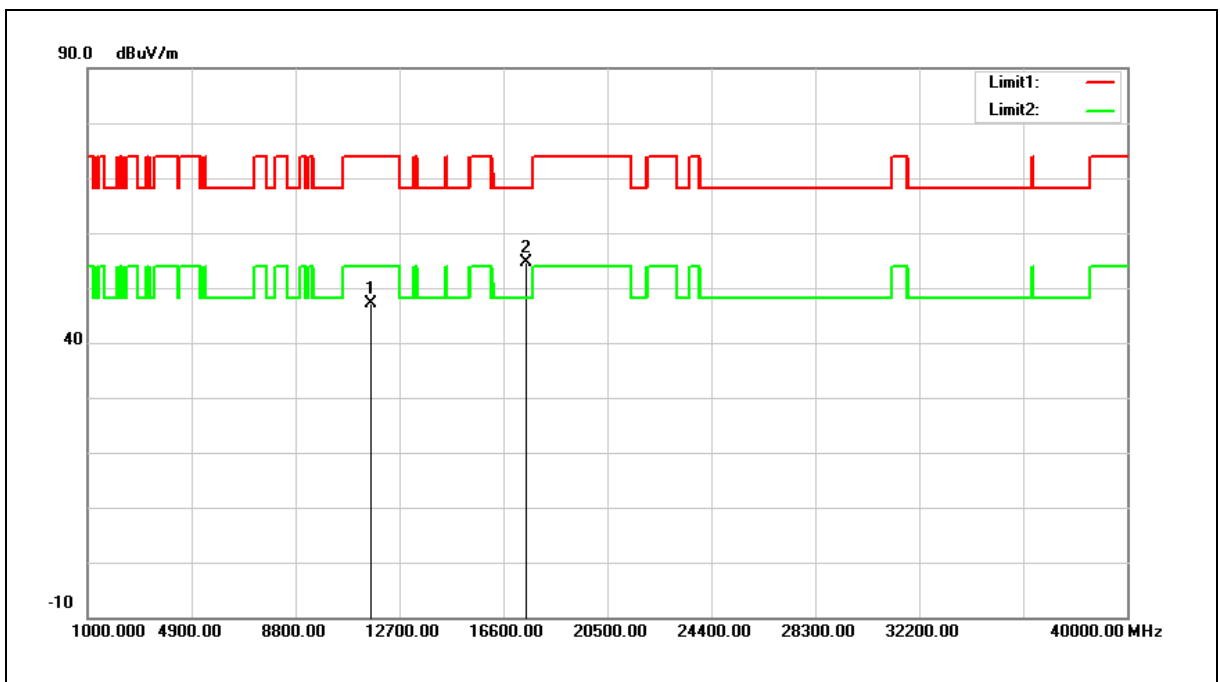


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.70	12.48	47.18	74.00	-26.82	peak
2	17475.000	34.39	20.13	54.52	68.20	-13.68	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

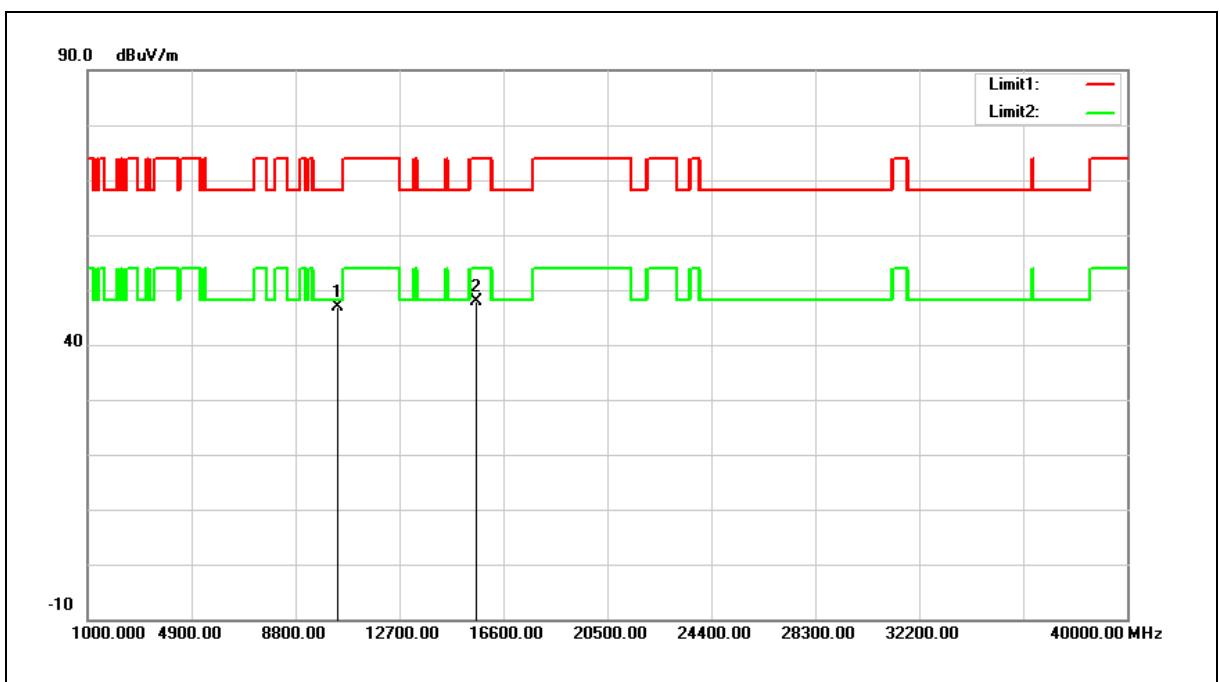


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.08	11.75	46.83	68.20	-21.37	peak
2	15570.000	33.37	14.45	47.82	74.00	-26.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

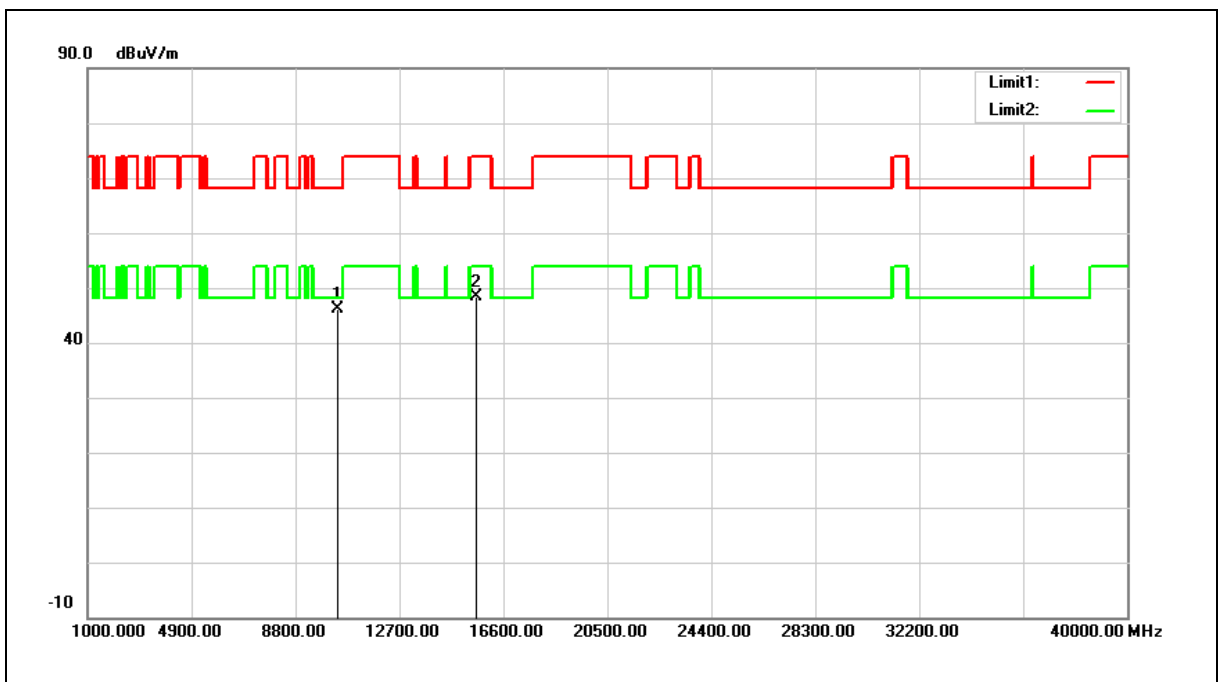


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.33	11.75	46.08	68.20	-22.12	peak
2	15570.000	34.00	14.45	48.45	74.00	-25.55	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

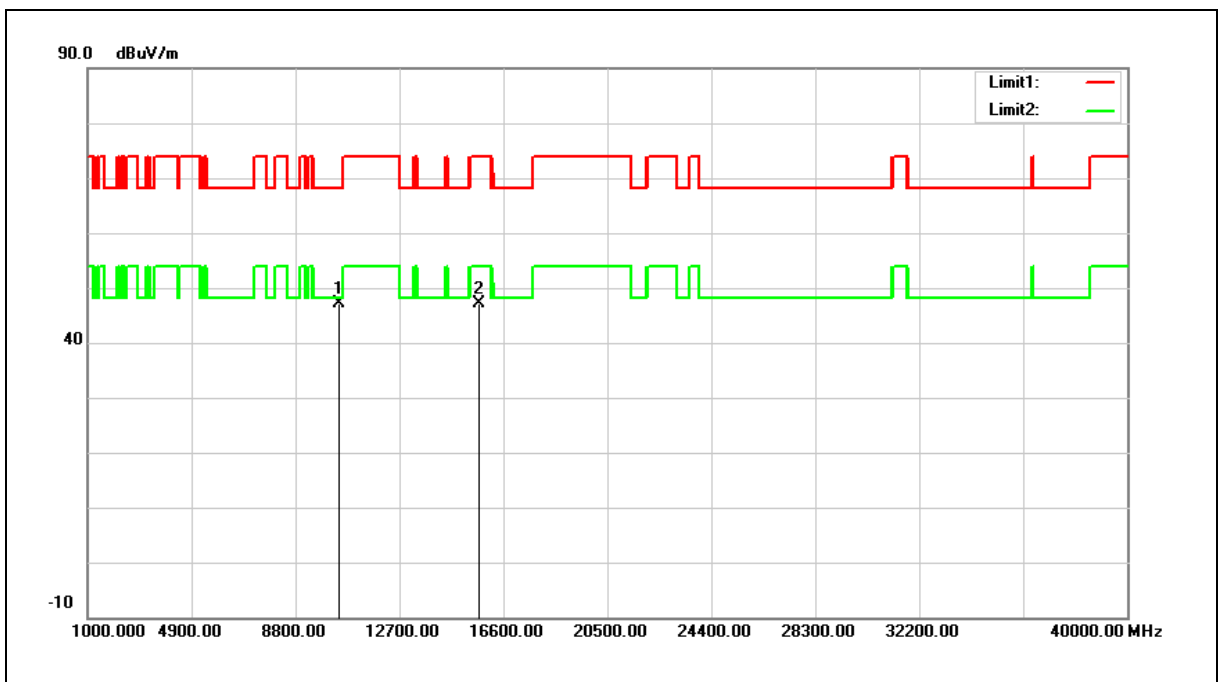


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.16	11.95	47.11	68.20	-21.09	peak
2	15690.000	32.95	14.19	47.14	74.00	-26.86	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

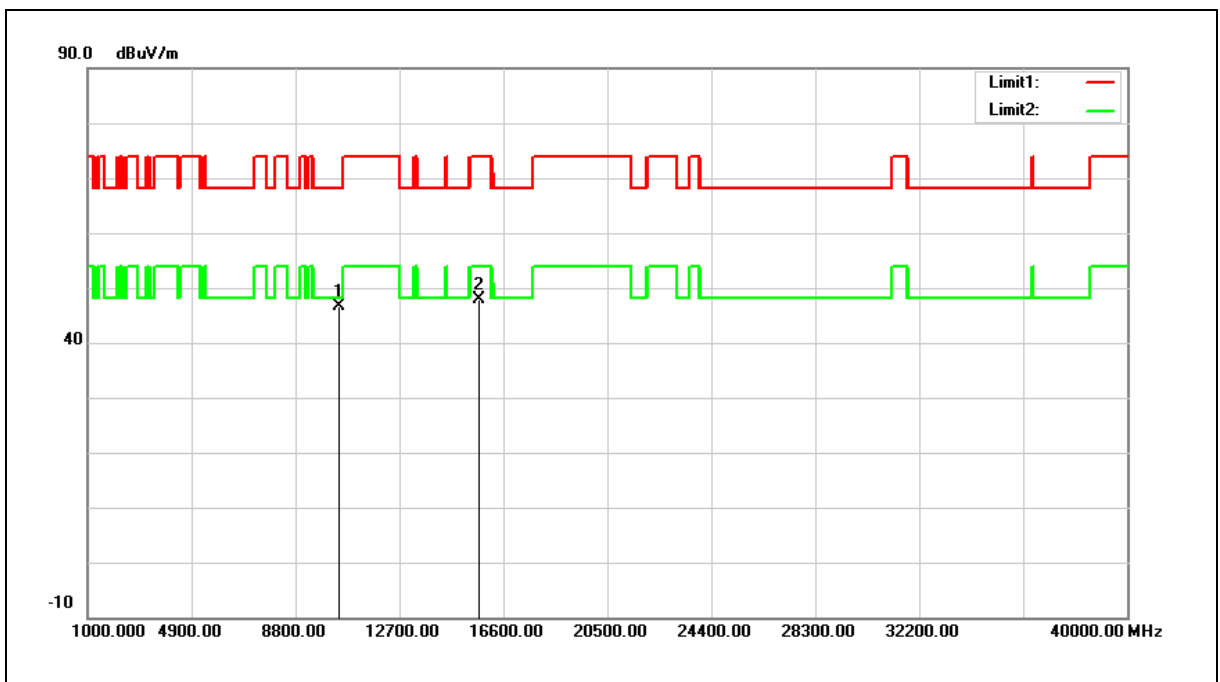


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	34.56	11.95	46.51	68.20	-21.69	peak
2	15690.000	33.66	14.19	47.85	74.00	-26.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

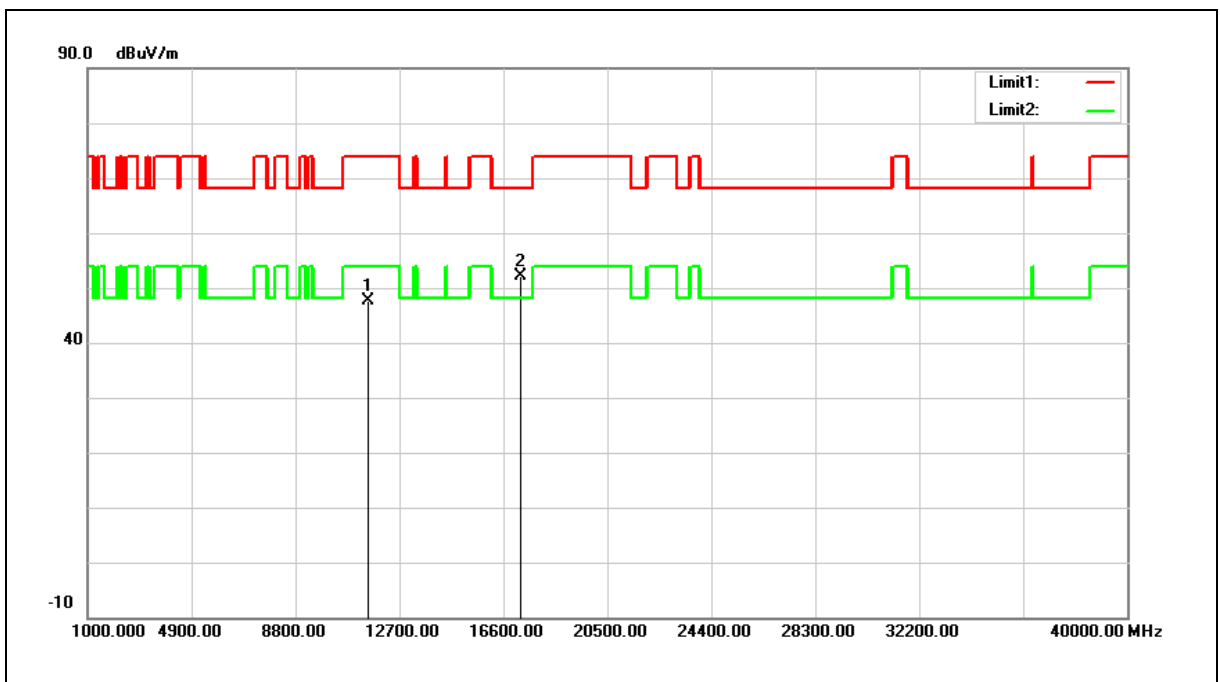


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.06	12.68	47.74	74.00	-26.26	peak
2	17265.000	33.45	18.72	52.17	68.20	-16.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

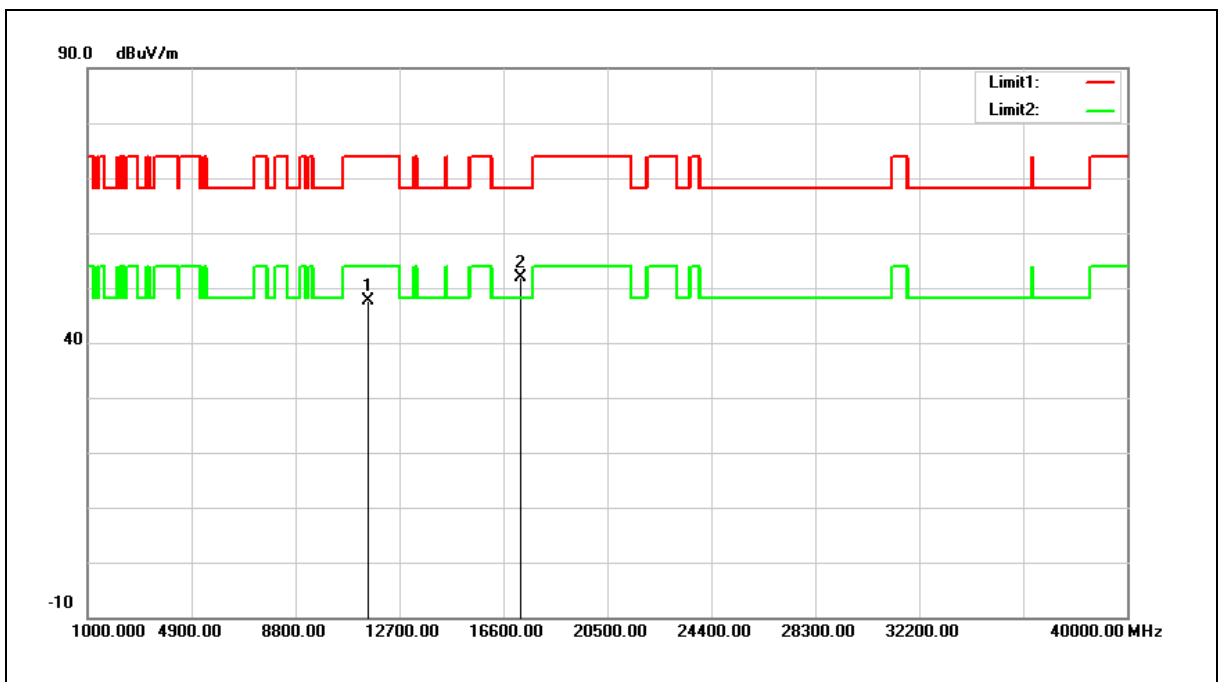


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.90	12.68	47.58	74.00	-26.42	peak
2	17265.000	33.09	18.72	51.81	68.20	-16.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

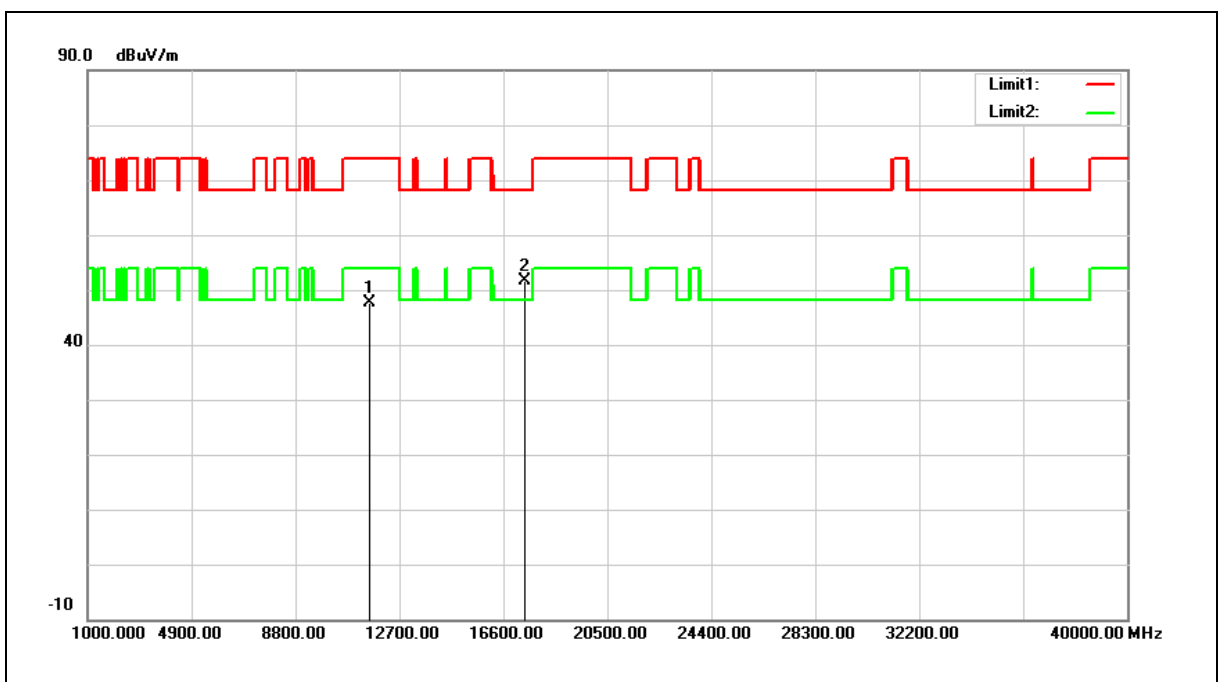


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.10	12.56	47.66	74.00	-26.34	peak
2	17385.000	32.23	19.52	51.75	68.20	-16.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

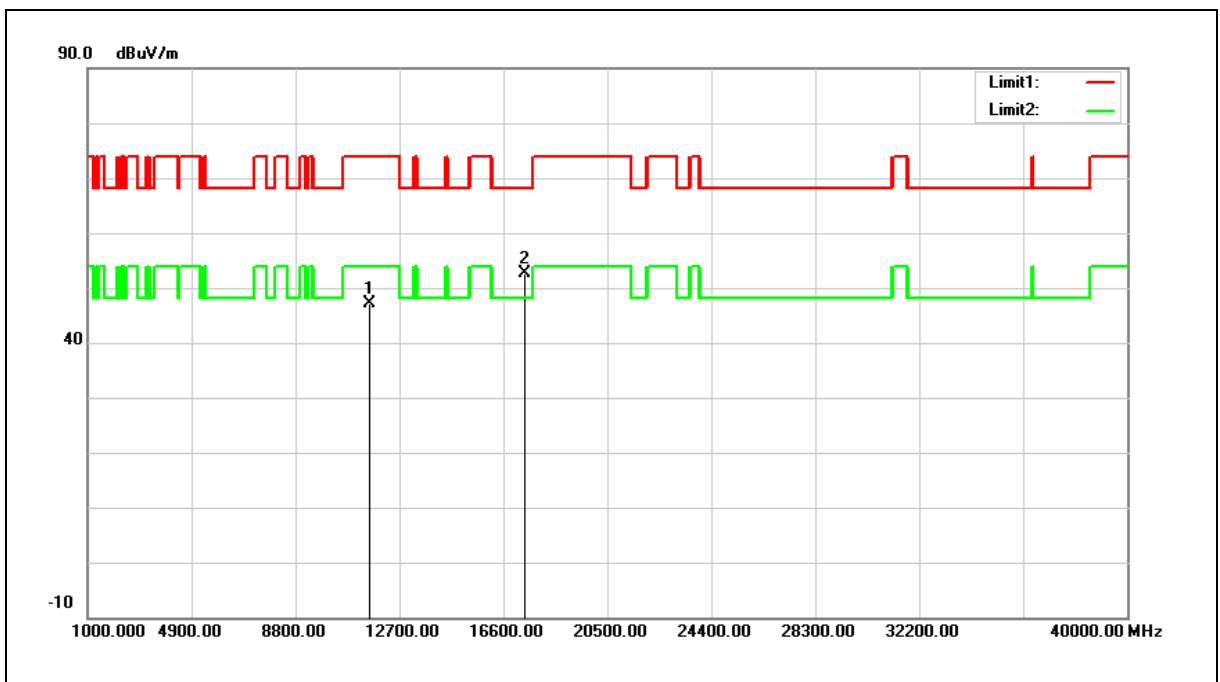


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.58	12.56	47.14	74.00	-26.86	peak
2	17385.000	33.06	19.52	52.58	68.20	-15.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

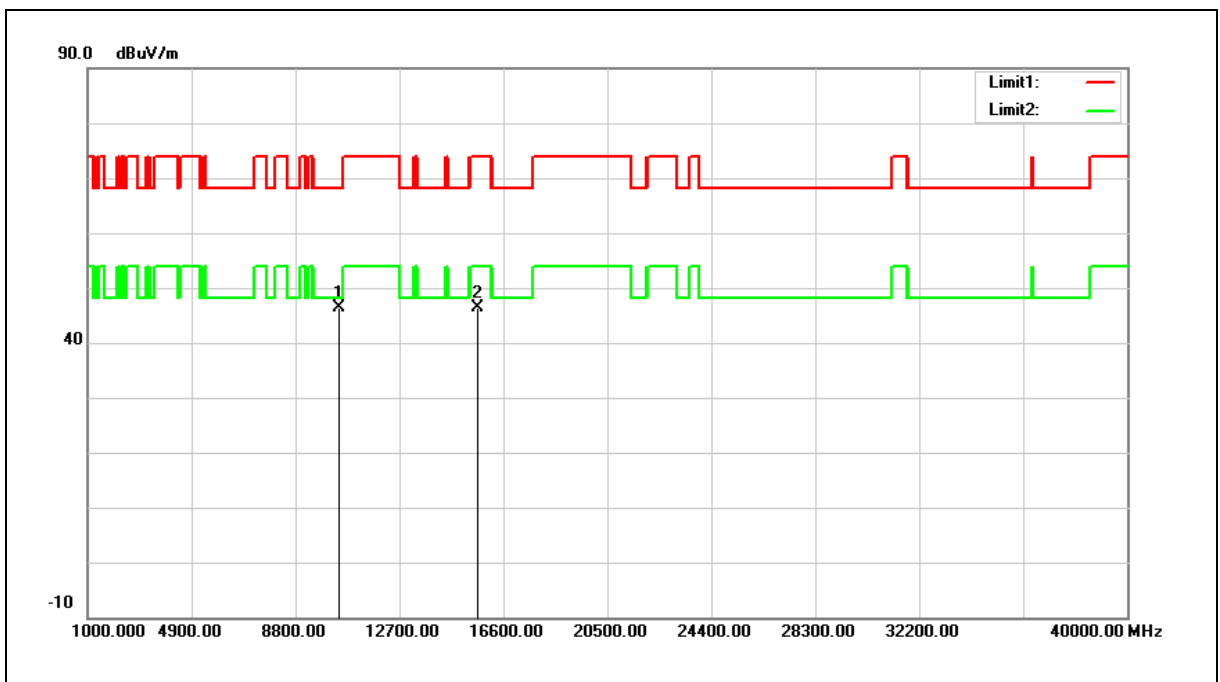


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	34.51	11.85	46.36	68.20	-21.84	peak
2	15630.000	32.15	14.33	46.48	74.00	-27.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

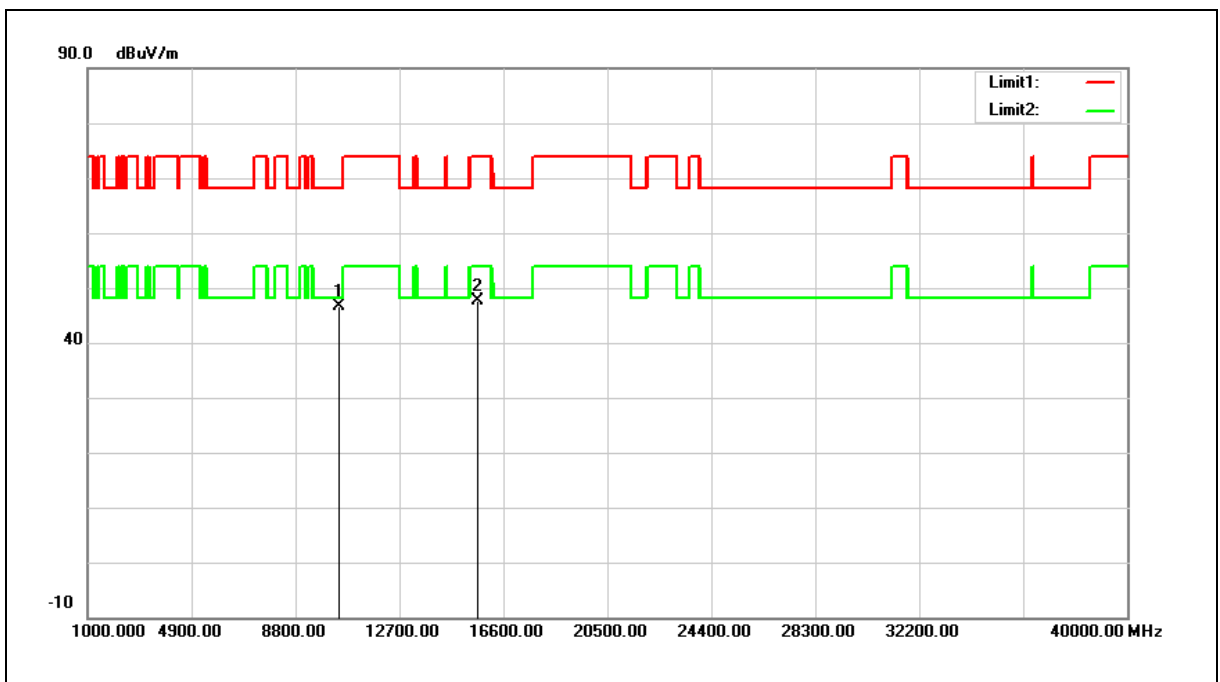


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	34.82	11.85	46.67	68.20	-21.53	peak
2	15630.000	33.22	14.33	47.55	74.00	-26.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

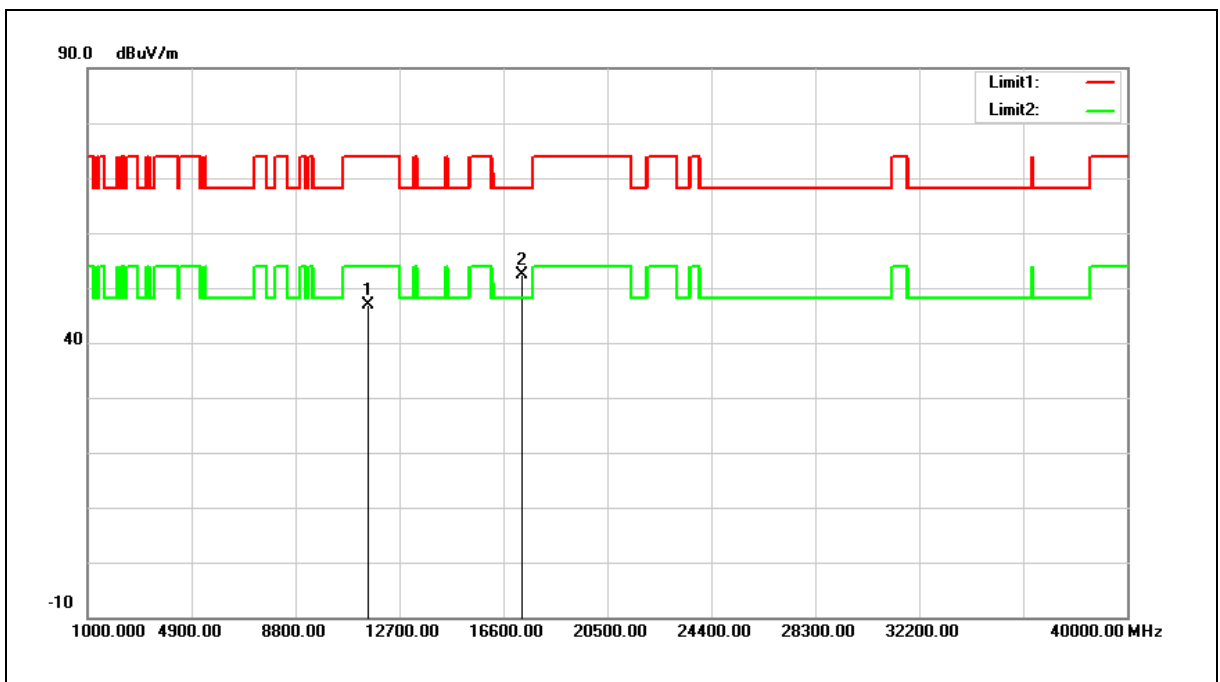


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	34.31	12.62	46.93	74.00	-27.07	peak
2	17325.000	33.37	19.12	52.49	68.20	-15.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

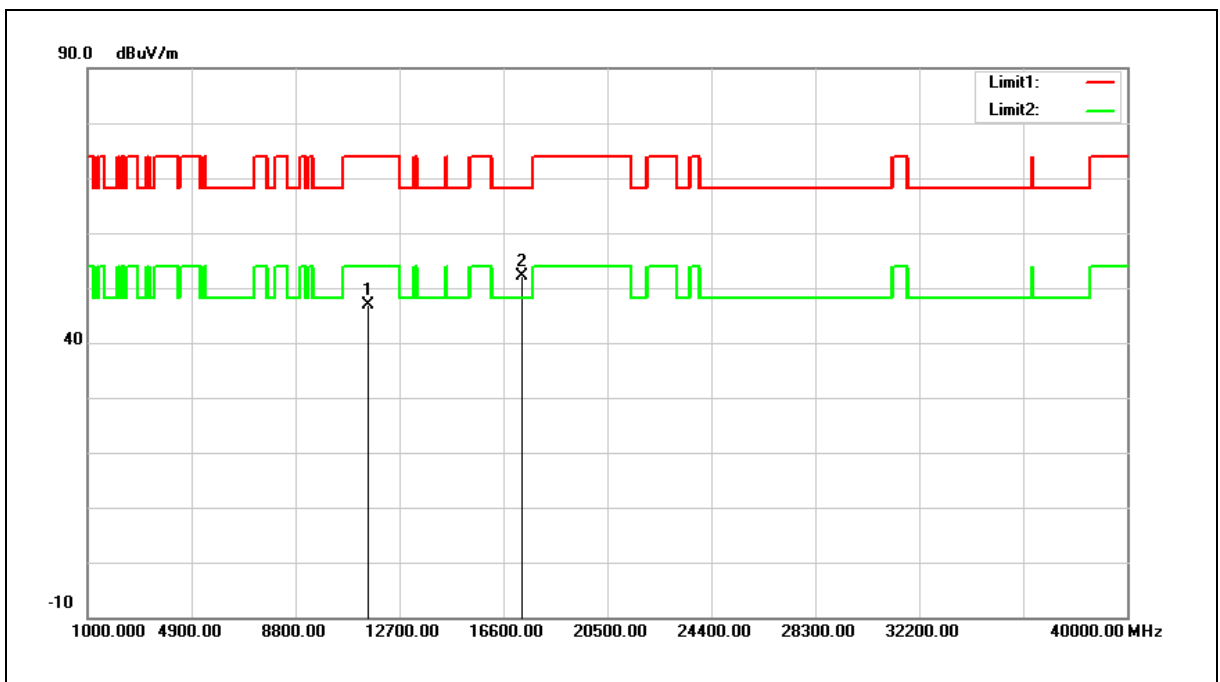


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	34.29	12.62	46.91	74.00	-27.09	peak
2	17325.000	33.09	19.12	52.21	68.20	-15.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 2.4 GHz + 5 GHz)		
Ant.Polar.:	Horizontal		

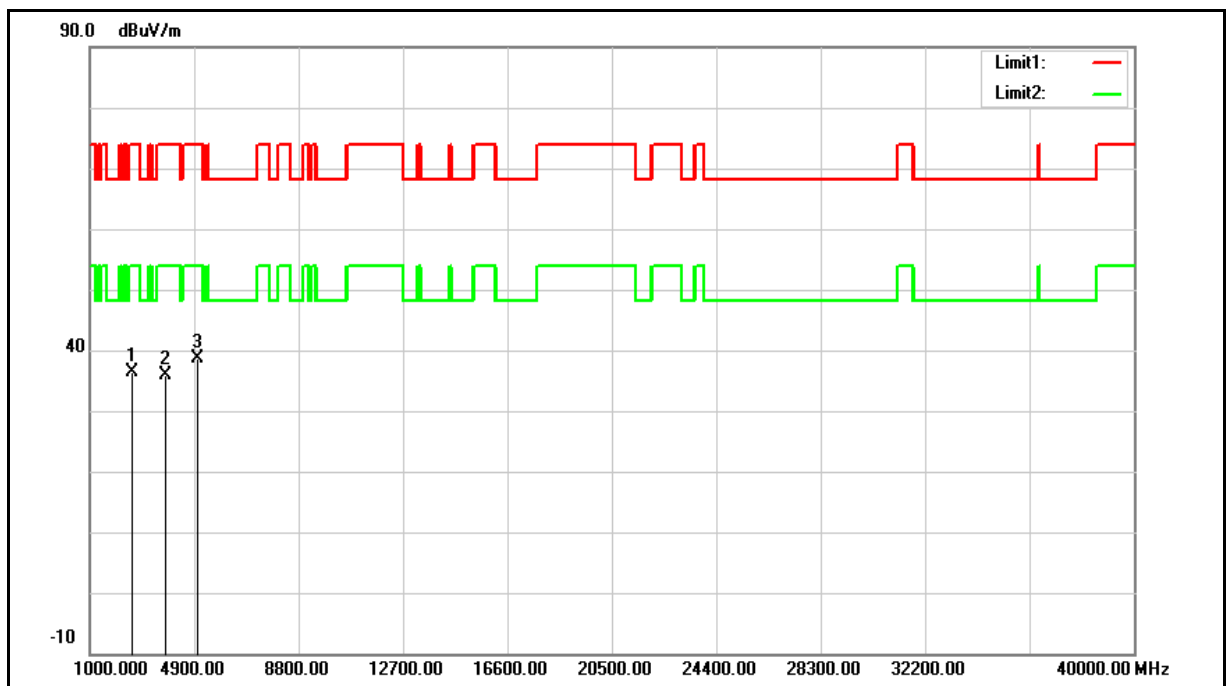


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2565.566	43.50	-7.01	36.49	74.00	-37.51	peak
2	3841.842	39.69	-3.92	35.77	74.00	-38.23	peak
3	5016.016	39.38	-0.74	38.64	74.00	-35.36	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 2.4 GHz + 5 GHz)		
Ant.Polar.:	Vertical		

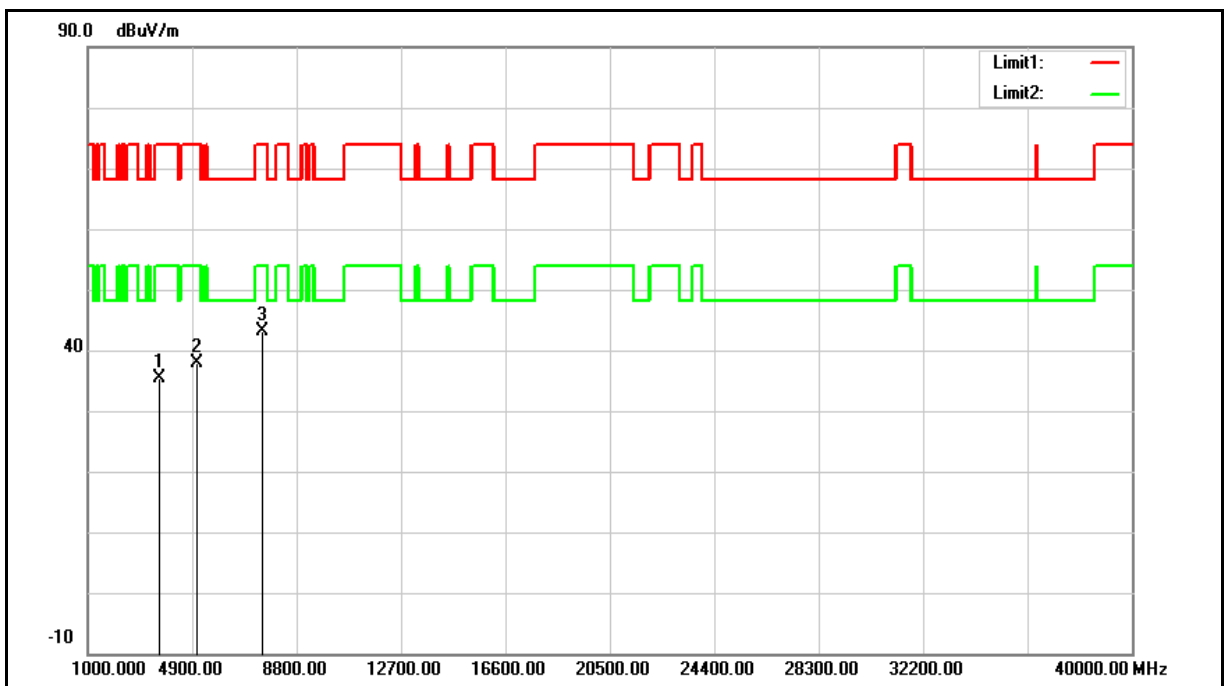


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3654.655	39.69	-4.42	35.27	74.00	-38.73	peak
2	5067.067	38.61	-0.64	37.97	74.00	-36.03	peak
3	7534.534	36.33	6.82	43.15	74.00	-30.85	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 19		
Ant.Polar.:	Horizontal		
Description:			

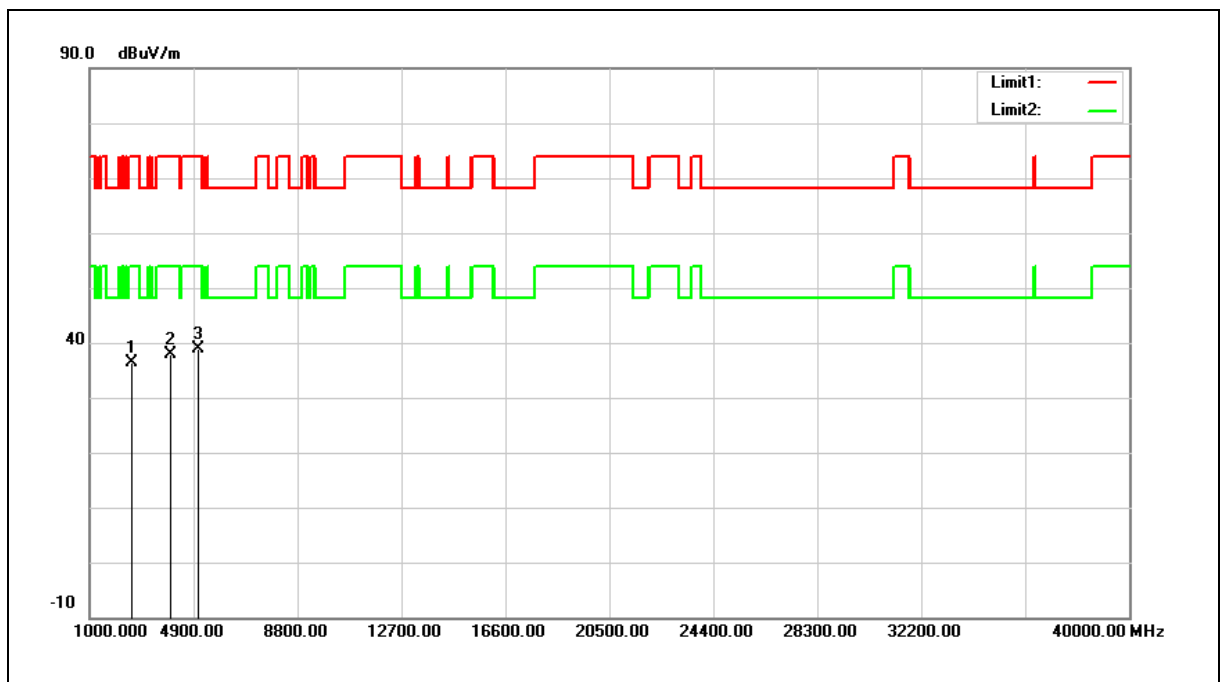


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2581.000	43.24	-6.94	36.30	74.00	-37.70	peak
2	4026.000	41.27	-3.42	37.85	74.00	-36.15	peak
3	5097.000	39.37	-0.57	38.80	74.00	-35.20	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 19		
Ant.Polar.:	Vertical		
Description:			

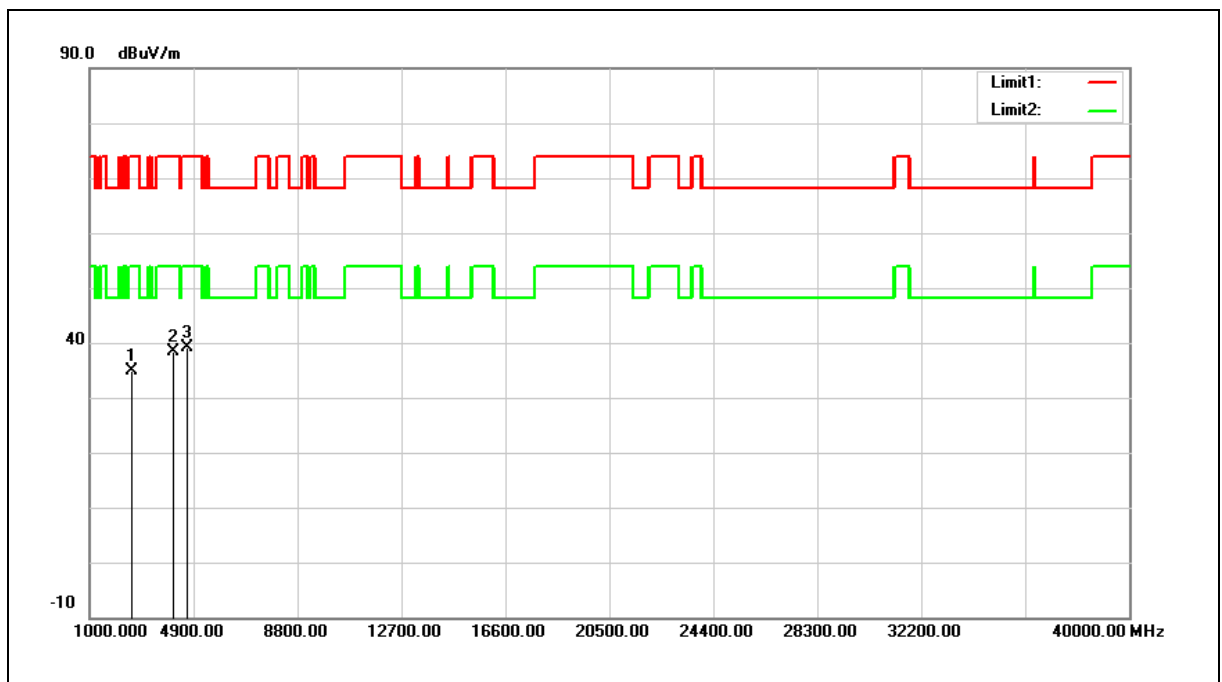

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2598.000	41.67	-6.88	34.79	74.00	-39.21	peak
2	4094.000	41.64	-3.24	38.40	74.00	-35.60	peak
3	4689.000	40.77	-1.63	39.14	74.00	-34.86	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

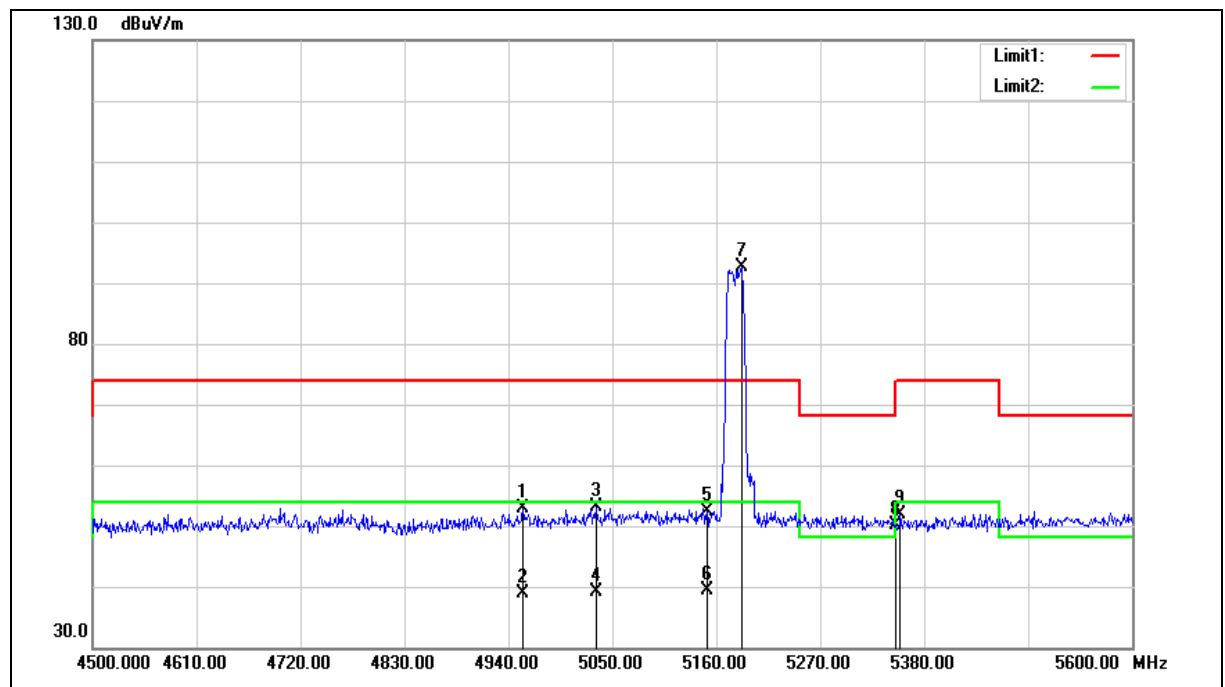

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4955.400	53.74	-0.89	52.85	74.00	-21.15	peak
2	4955.400	39.75	-0.89	38.86	54.00	-15.14	AVG
3	5032.400	53.75	-0.70	53.05	74.00	-20.95	peak
4	5032.400	39.82	-0.70	39.12	54.00	-14.88	AVG
5	5150.000	52.84	-0.48	52.36	74.00	-21.64	peak
6	5150.000	39.75	-0.48	39.27	54.00	-14.73	AVG
7	5186.400	93.03	-0.40	92.63	--	--	peak
8	5350.000	50.23	-0.08	50.15	74.00	-23.85	peak
9	5354.700	52.05	-0.08	51.97	74.00	-22.03	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

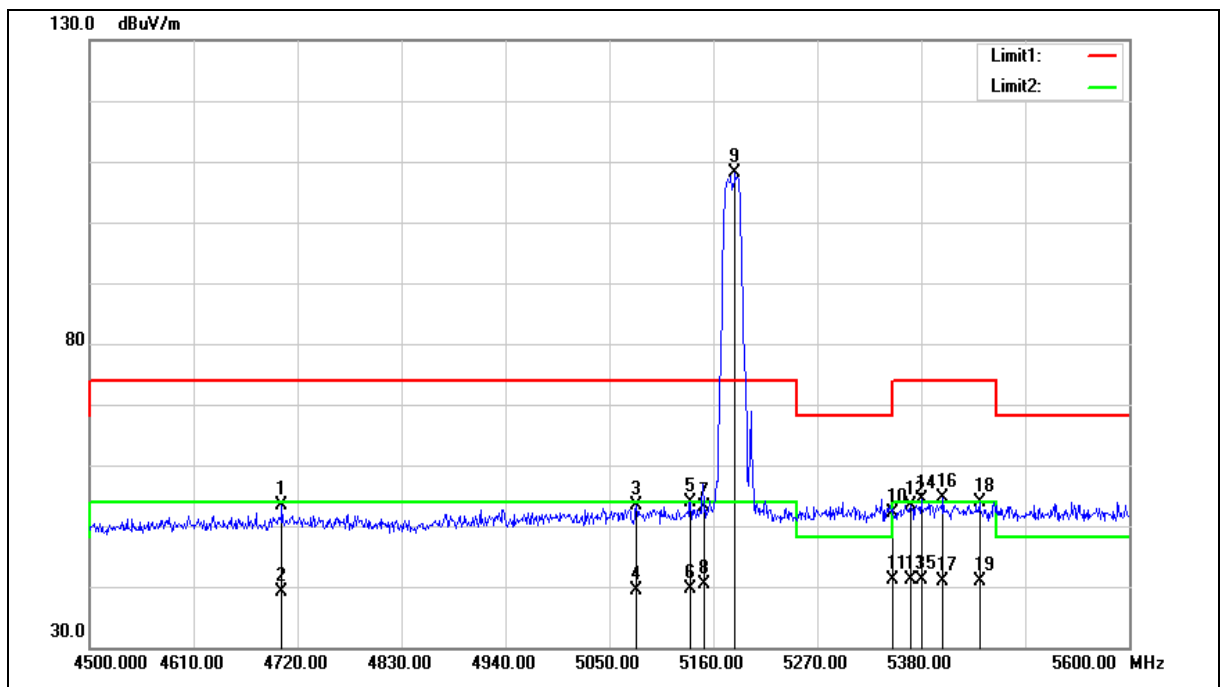

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4703.500	55.02	-1.58	53.44	74.00	-20.56	peak
2	4703.500	40.62	-1.58	39.04	54.00	-14.96	AVG
3	5078.600	53.93	-0.62	53.31	74.00	-20.69	peak
4	5078.600	40.03	-0.62	39.41	54.00	-14.59	AVG
5	5135.800	54.45	-0.50	53.95	74.00	-20.05	peak
6	5135.800	40.12	-0.50	39.62	54.00	-14.38	AVG
7	5150.000	53.51	-0.48	53.03	74.00	-20.97	peak
8	5150.000	40.90	-0.48	40.42	54.00	-13.58	AVG
9	5183.100	108.54	-0.40	108.14	--	--	peak
10	5350.000	52.16	-0.08	52.08	74.00	-21.92	peak
11	5350.000	41.09	-0.08	41.01	54.00	-12.99	AVG
12	5369.000	53.49	-0.04	53.45	74.00	-20.55	peak
13	5369.000	41.22	-0.04	41.18	54.00	-12.82	AVG
14	5380.000	54.33	-0.03	54.30	74.00	-19.70	peak
15	5380.000	41.24	-0.03	41.21	54.00	-12.79	AVG
16	5403.100	54.64	0.02	54.66	74.00	-19.34	peak
17	5403.100	40.96	0.02	40.98	54.00	-13.02	AVG
18	5441.600	53.68	0.09	53.77	74.00	-20.23	peak
19	5441.600	40.83	0.09	40.92	54.00	-13.08	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

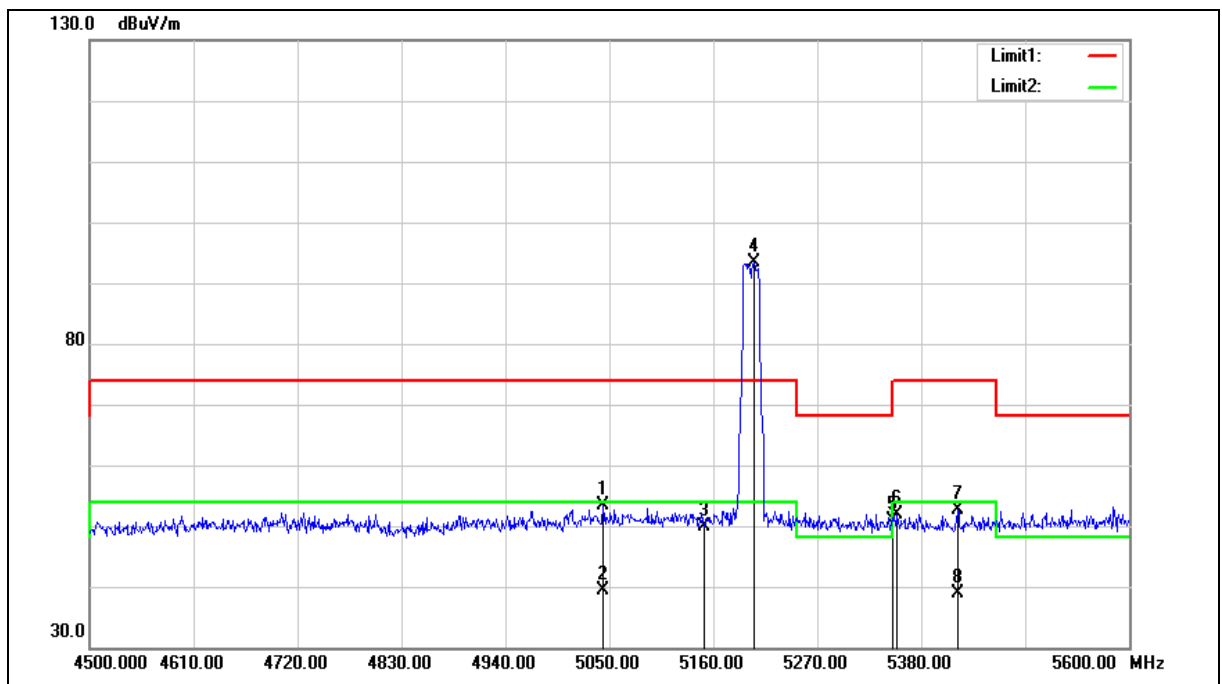

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5043.400	53.95	-0.69	53.26	74.00	-20.74	peak
2	5043.400	40.01	-0.69	39.32	54.00	-14.68	AVG
3	5150.000	50.38	-0.48	49.90	74.00	-24.10	peak
4	5202.900	93.82	-0.37	93.45	--	--	peak
5	5350.000	50.85	-0.08	50.77	74.00	-23.23	peak
6	5353.600	52.00	-0.08	51.92	74.00	-22.08	peak
7	5418.500	52.50	0.05	52.55	74.00	-21.45	peak
8	5418.500	38.86	0.05	38.91	54.00	-15.09	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

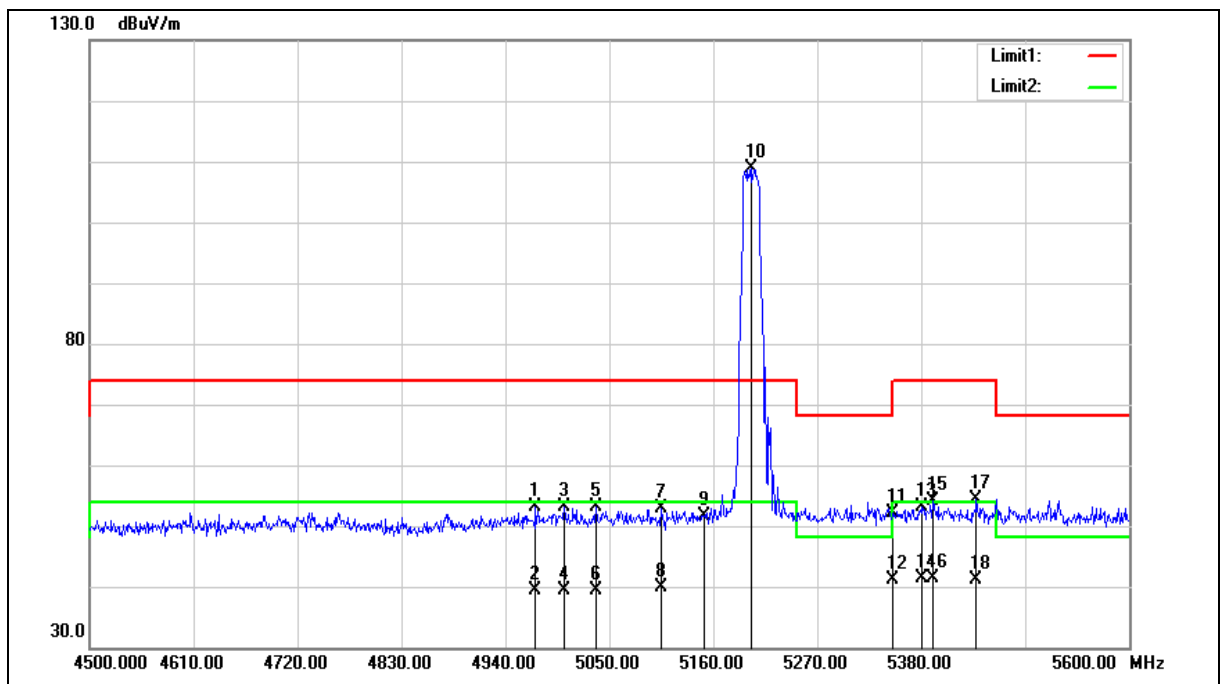

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4971.900	54.04	-0.84	53.20	74.00	-20.80	peak
2	4971.900	40.24	-0.84	39.40	54.00	-14.60	AVG
3	5002.700	53.95	-0.77	53.18	74.00	-20.82	peak
4	5002.700	40.26	-0.77	39.49	54.00	-14.51	AVG
5	5035.700	53.79	-0.70	53.09	74.00	-20.91	peak
6	5035.700	40.18	-0.70	39.48	54.00	-14.52	AVG
7	5105.000	53.35	-0.57	52.78	74.00	-21.22	peak
8	5105.000	40.40	-0.57	39.83	54.00	-14.17	AVG
9	5150.000	52.03	-0.48	51.55	74.00	-22.45	peak
10	5200.700	109.17	-0.37	108.80	--	--	peak
11	5350.000	52.23	-0.08	52.15	74.00	-21.85	peak
12	5350.000	41.14	-0.08	41.06	54.00	-12.94	AVG
13	5380.000	53.28	-0.03	53.25	74.00	-20.75	peak
14	5380.000	41.37	-0.03	41.34	54.00	-12.66	AVG
15	5392.100	54.07	0.00	54.07	74.00	-19.93	peak
16	5392.100	41.42	0.00	41.42	54.00	-12.58	AVG
17	5438.300	54.21	0.09	54.30	74.00	-19.70	peak
18	5438.300	40.98	0.09	41.07	54.00	-12.93	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

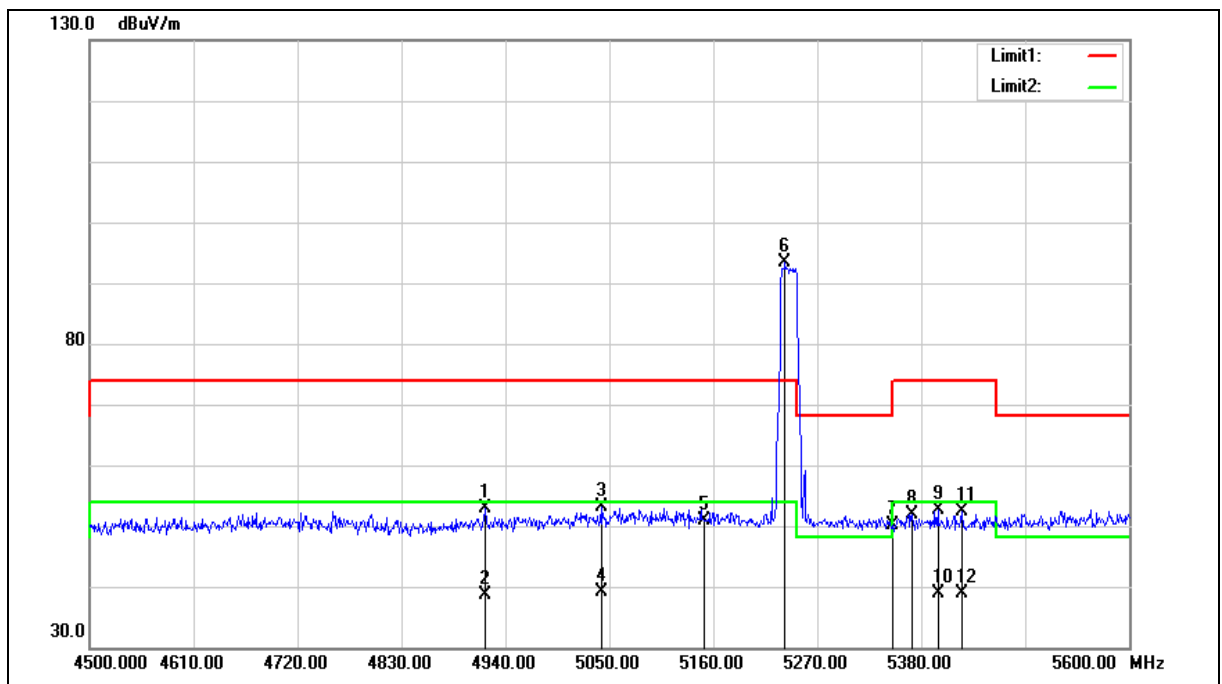

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4919.100	53.90	-1.00	52.90	74.00	-21.10	peak
2	4919.100	39.73	-1.00	38.73	54.00	-15.27	AVG
3	5041.200	53.73	-0.69	53.04	74.00	-20.96	peak
4	5041.200	39.94	-0.69	39.25	54.00	-14.75	AVG
5	5150.000	51.32	-0.48	50.84	74.00	-23.16	peak
6	5235.900	93.57	-0.31	93.26	--	--	peak
7	5350.000	50.10	-0.08	50.02	74.00	-23.98	peak
8	5370.100	51.93	-0.03	51.90	74.00	-22.10	peak
9	5397.600	52.63	0.01	52.64	74.00	-21.36	peak
10	5397.600	38.88	0.01	38.89	54.00	-15.11	AVG
11	5422.900	52.41	0.06	52.47	74.00	-21.53	peak
12	5422.900	38.84	0.06	38.90	54.00	-15.10	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

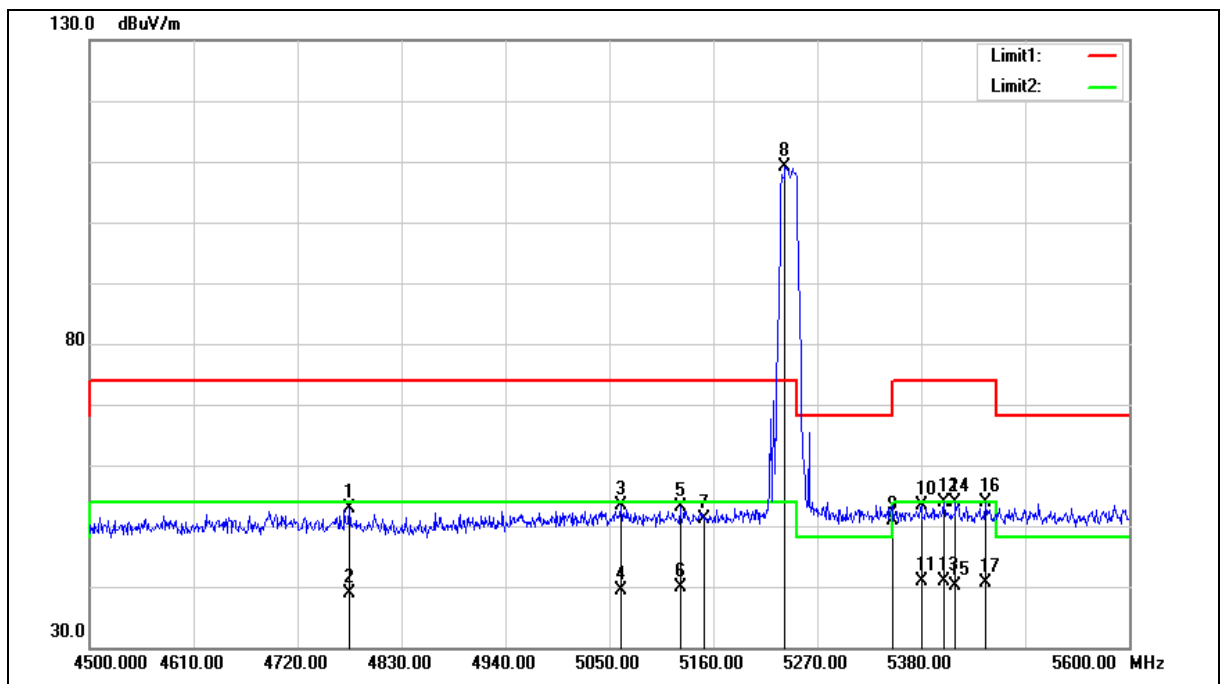

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4775.000	54.34	-1.40	52.94	74.00	-21.06	peak
2	4775.000	40.40	-1.40	39.00	54.00	-15.00	AVG
3	5062.100	54.00	-0.65	53.35	74.00	-20.65	peak
4	5062.100	40.03	-0.65	39.38	54.00	-14.62	AVG
5	5124.800	53.74	-0.52	53.22	74.00	-20.78	peak
6	5124.800	40.36	-0.52	39.84	54.00	-14.16	AVG
7	5150.000	51.57	-0.48	51.09	74.00	-22.91	peak
8	5235.900	109.44	-0.31	109.13	--	--	peak
9	5350.000	50.94	-0.08	50.86	74.00	-23.14	peak
10	5380.000	53.50	-0.03	53.47	74.00	-20.53	peak
11	5380.000	40.98	-0.03	40.95	54.00	-13.05	AVG
12	5404.200	53.75	0.02	53.77	74.00	-20.23	peak
13	5404.200	40.84	0.02	40.86	54.00	-13.14	AVG
14	5416.300	53.74	0.05	53.79	74.00	-20.21	peak
15	5416.300	40.01	0.05	40.06	54.00	-13.94	AVG
16	5448.200	53.80	0.12	53.92	74.00	-20.08	peak
17	5448.200	40.51	0.12	40.63	54.00	-13.37	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

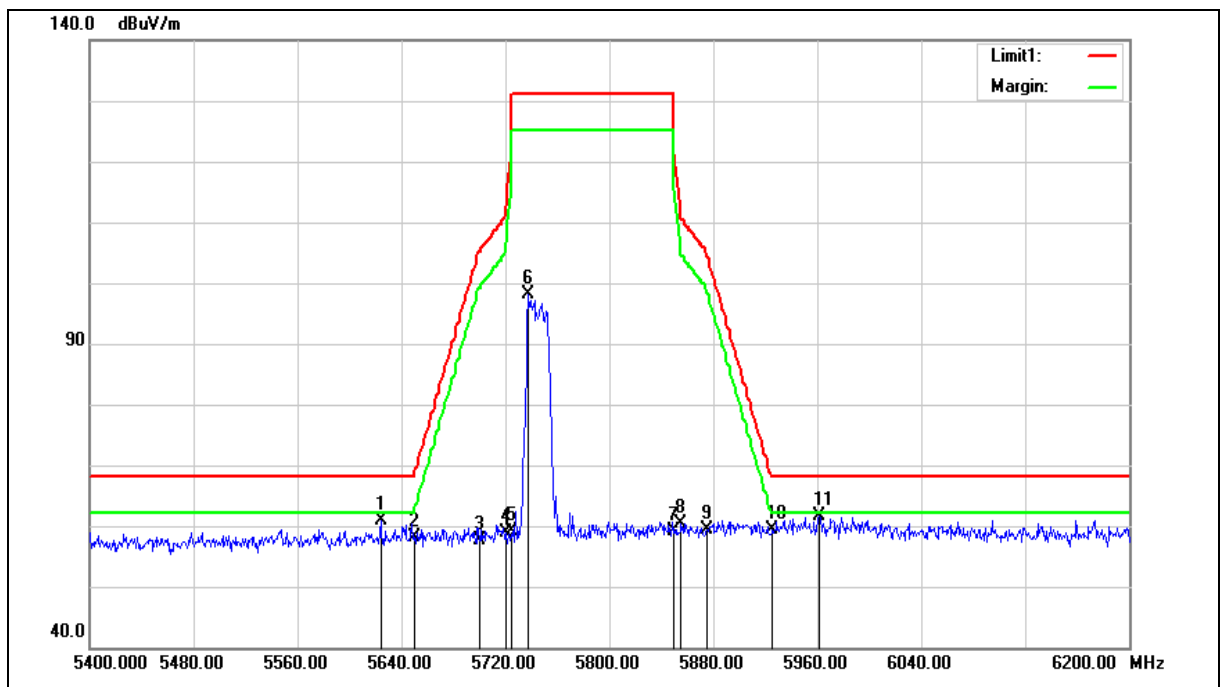

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5624.000	60.35	0.55	60.90	68.20	-7.30	peak
2	5650.000	57.47	0.62	58.09	68.20	-10.11	peak
3	5700.000	56.87	0.75	57.62	105.20	-47.58	peak
4	5720.000	58.17	0.81	58.98	110.80	-51.82	peak
5	5725.000	58.36	0.82	59.18	122.20	-63.02	peak
6	5737.600	97.22	0.86	98.08	--	--	peak
7	5850.000	58.05	1.17	59.22	122.20	-62.98	peak
8	5855.000	59.24	1.18	60.42	110.80	-50.38	peak
9	5875.000	58.25	1.23	59.48	105.20	-45.72	peak
10	5925.000	58.09	1.37	59.46	68.20	-8.74	peak
11	5961.600	60.06	1.46	61.52	68.20	-6.68	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

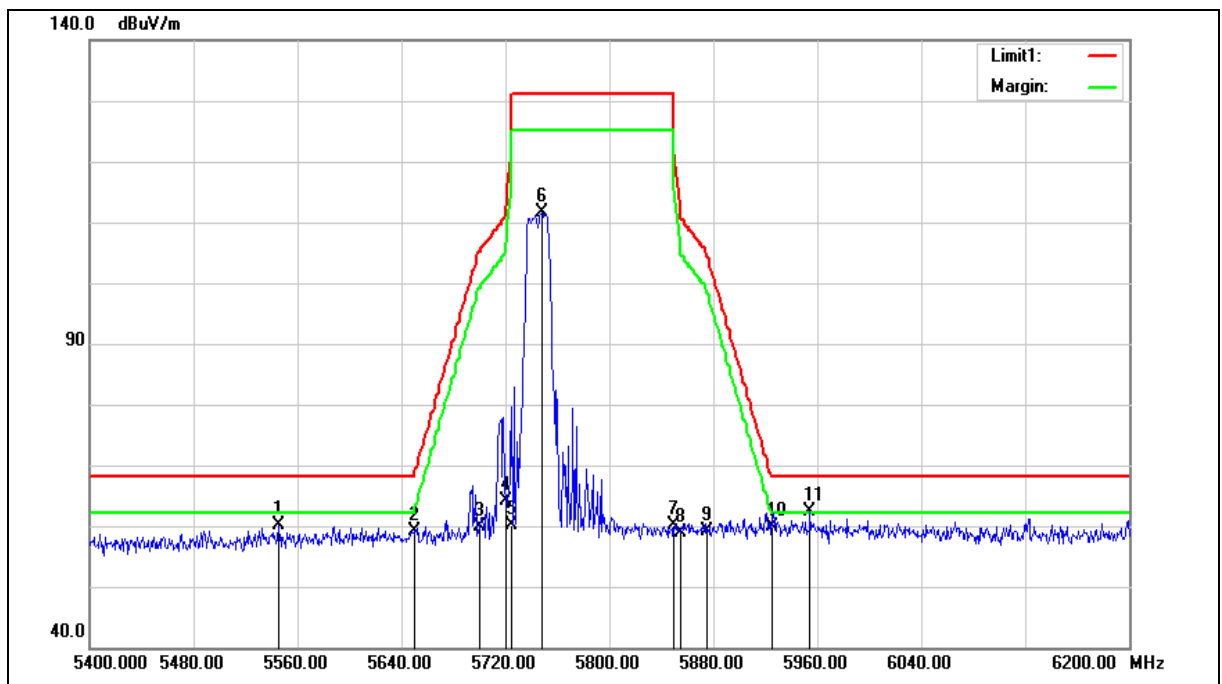

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5545.600	59.70	0.34	60.04	68.20	-8.16	peak
2	5650.000	58.42	0.62	59.04	68.20	-9.16	peak
3	5700.000	59.06	0.75	59.81	105.20	-45.39	peak
4	5720.000	63.31	0.81	64.12	110.80	-46.68	peak
5	5725.000	59.37	0.82	60.19	122.20	-62.01	peak
6	5748.000	110.85	0.89	111.74	--	--	peak
7	5850.000	58.84	1.17	60.01	122.20	-62.19	peak
8	5855.000	57.80	1.18	58.98	110.80	-51.82	peak
9	5875.000	57.91	1.23	59.14	105.20	-46.06	peak
10	5925.000	58.63	1.37	60.00	68.20	-8.20	peak
11	5954.400	60.87	1.45	62.32	68.20	-5.88	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

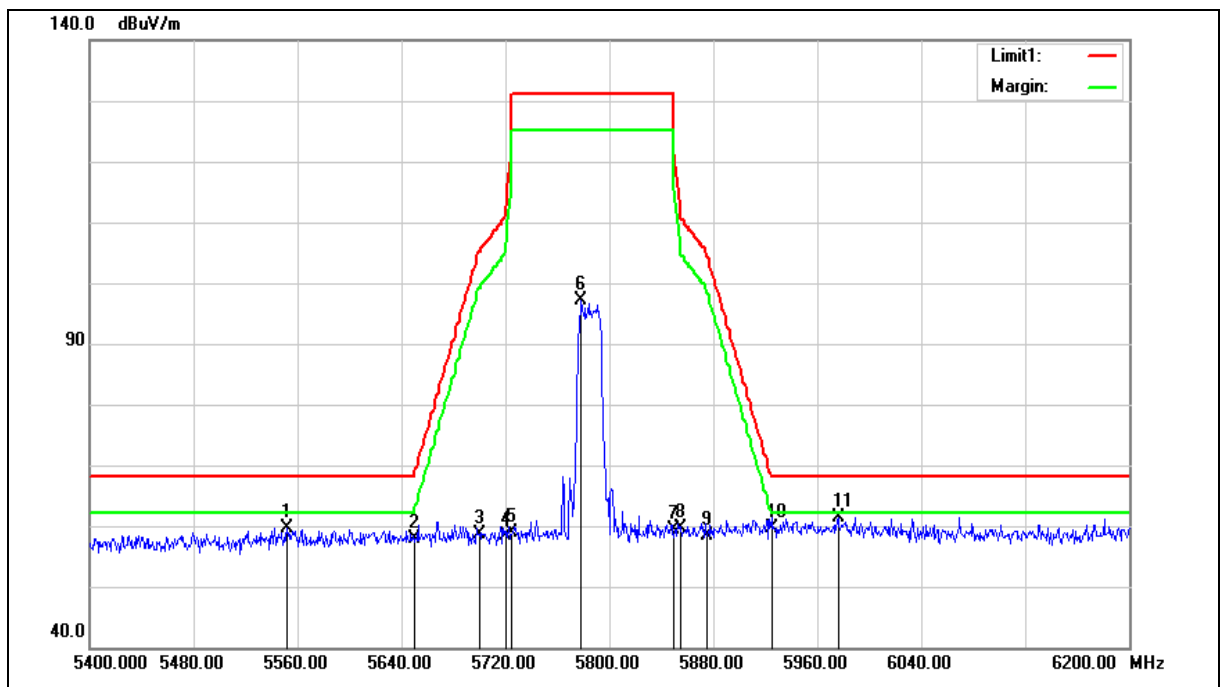

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5552.000	59.29	0.35	59.64	68.20	-8.56	peak
2	5650.000	57.37	0.62	57.99	68.20	-10.21	peak
3	5700.000	57.88	0.75	58.63	105.20	-46.57	peak
4	5720.000	57.68	0.81	58.49	110.80	-52.31	peak
5	5725.000	58.17	0.82	58.99	122.20	-63.21	peak
6	5778.400	96.15	0.98	97.13	--	--	peak
7	5850.000	58.23	1.17	59.40	122.20	-62.80	peak
8	5855.000	58.47	1.18	59.65	110.80	-51.15	peak
9	5875.000	57.25	1.23	58.48	105.20	-46.72	peak
10	5925.000	58.34	1.37	59.71	68.20	-8.49	peak
11	5976.000	59.86	1.50	61.36	68.20	-6.84	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

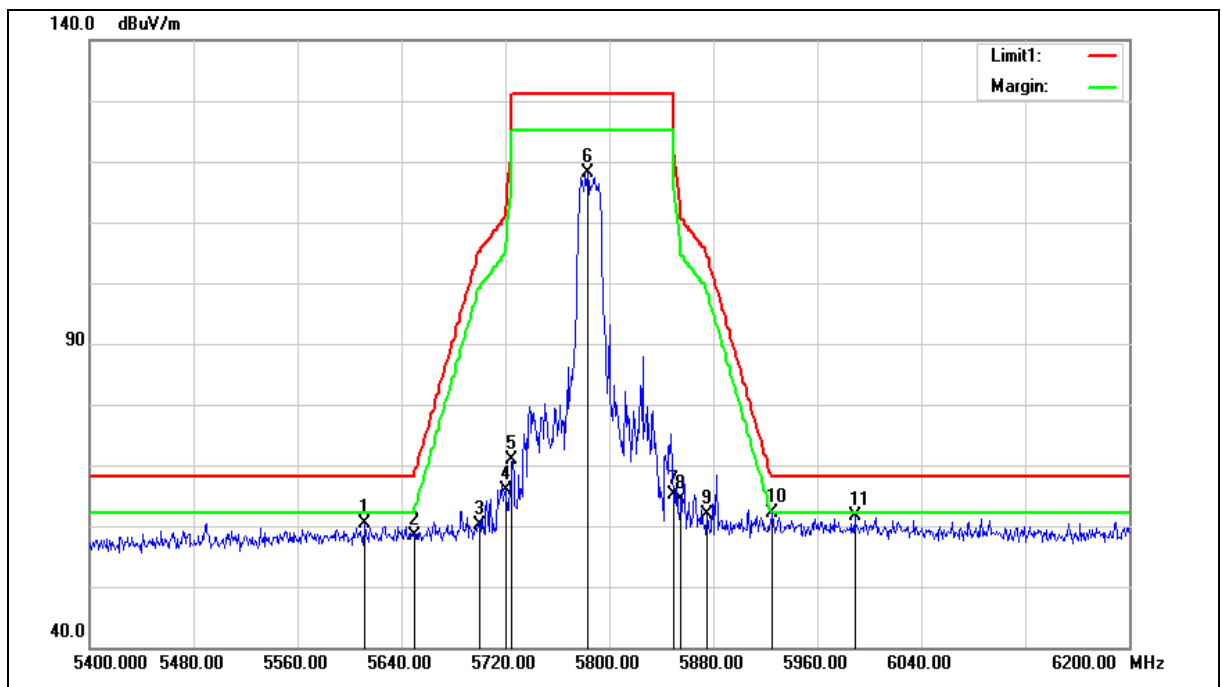

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5612.000	59.91	0.52	60.43	68.20	-7.77	peak
2	5650.000	57.71	0.62	58.33	68.20	-9.87	peak
3	5700.000	59.38	0.75	60.13	105.20	-45.07	peak
4	5720.000	65.08	0.81	65.89	110.80	-44.91	peak
5	5725.000	70.00	0.82	70.82	122.20	-51.38	peak
6	5783.200	117.24	0.98	118.22	--	--	peak
7	5850.000	64.01	1.17	65.18	122.20	-57.02	peak
8	5855.000	63.21	1.18	64.39	110.80	-46.41	peak
9	5875.000	60.59	1.23	61.82	105.20	-43.38	peak
10	5925.000	60.65	1.37	62.02	68.20	-6.18	peak
11	5988.800	59.98	1.54	61.52	68.20	-6.68	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

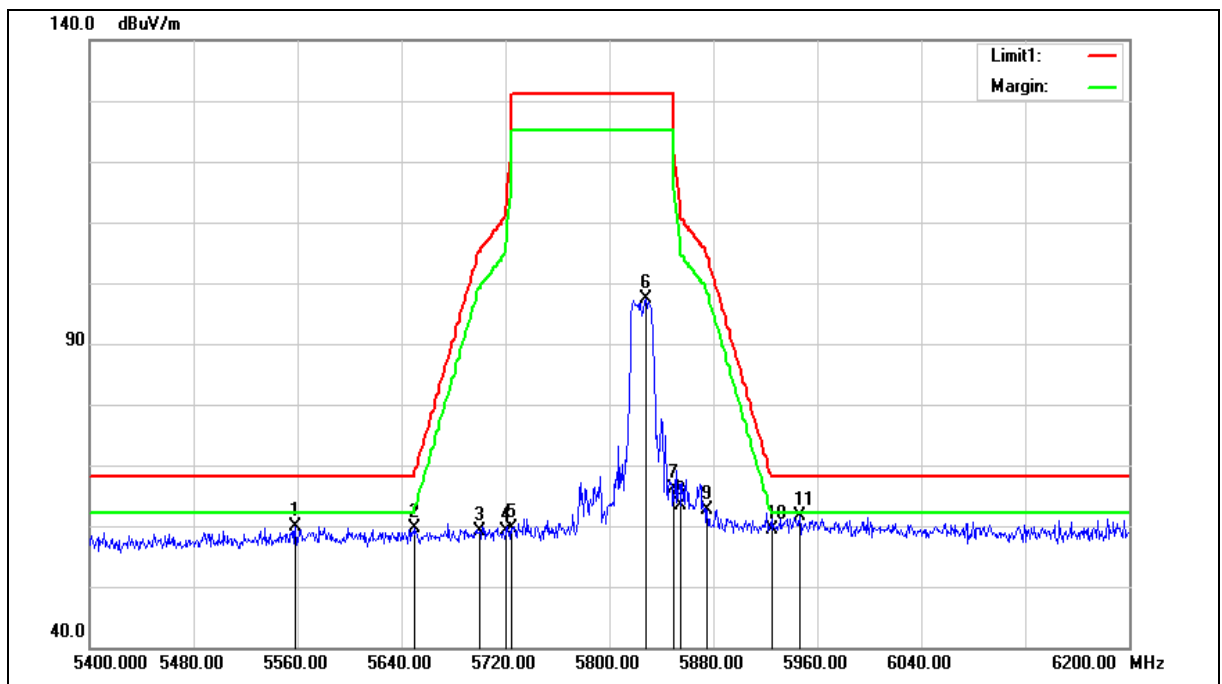

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5558.400	59.55	0.37	59.92	68.20	-8.28	peak
2	5650.000	58.94	0.62	59.56	68.20	-8.64	peak
3	5700.000	58.48	0.75	59.23	105.20	-45.97	peak
4	5720.000	58.31	0.81	59.12	110.80	-51.68	peak
5	5725.000	58.90	0.82	59.72	122.20	-62.48	peak
6	5828.000	96.30	1.10	97.40	--	--	peak
7	5850.000	65.00	1.17	66.17	122.20	-56.03	peak
8	5855.000	62.30	1.18	63.48	110.80	-47.32	peak
9	5875.000	61.32	1.23	62.55	105.20	-42.65	peak
10	5925.000	58.02	1.37	59.39	68.20	-8.81	peak
11	5946.400	60.24	1.42	61.66	68.20	-6.54	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

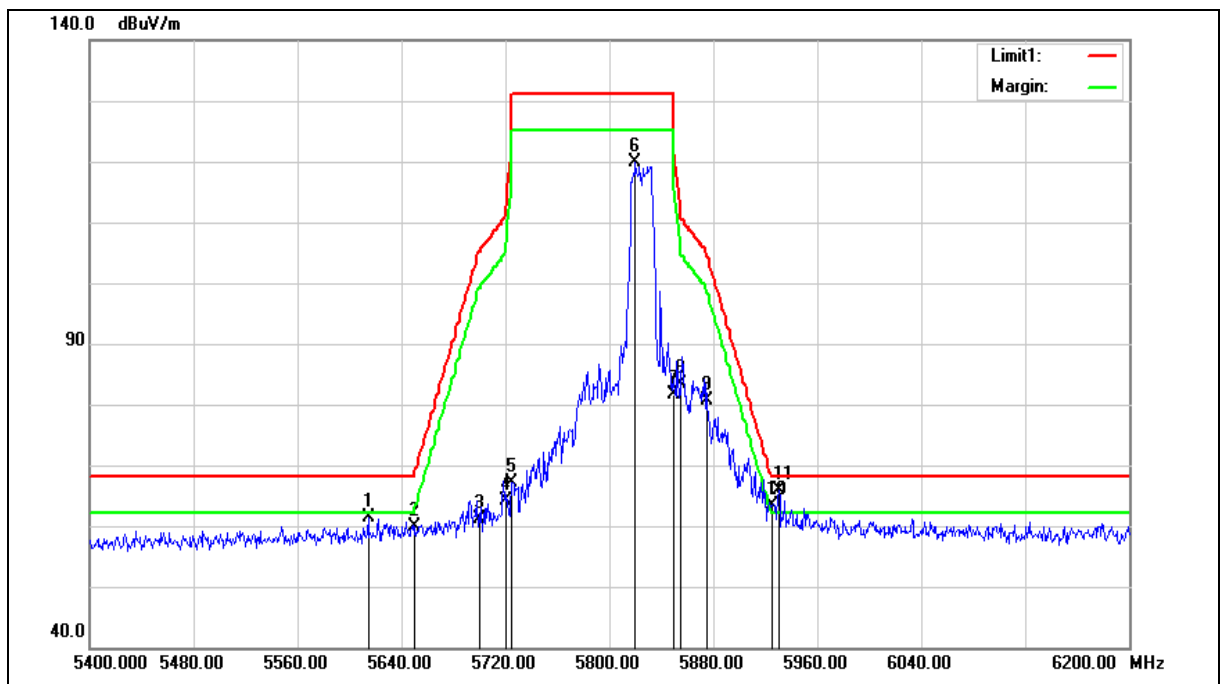

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5614.400	60.74	0.52	61.26	68.20	-6.94	peak
2	5650.000	59.14	0.62	59.76	68.20	-8.44	peak
3	5700.000	60.48	0.75	61.23	105.20	-43.97	peak
4	5720.000	63.35	0.81	64.16	110.80	-46.64	peak
5	5725.000	66.41	0.82	67.23	122.20	-54.97	peak
6	5820.000	118.75	1.08	119.83	--	--	peak
7	5850.000	80.50	1.17	81.67	122.20	-40.53	peak
8	5855.000	82.27	1.18	83.45	110.80	-27.35	peak
9	5875.000	79.51	1.23	80.74	105.20	-24.46	peak
10	5925.000	61.91	1.37	63.28	68.20	-4.92	peak
11	5930.400	64.62	1.38	66.00	68.20	-2.20	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

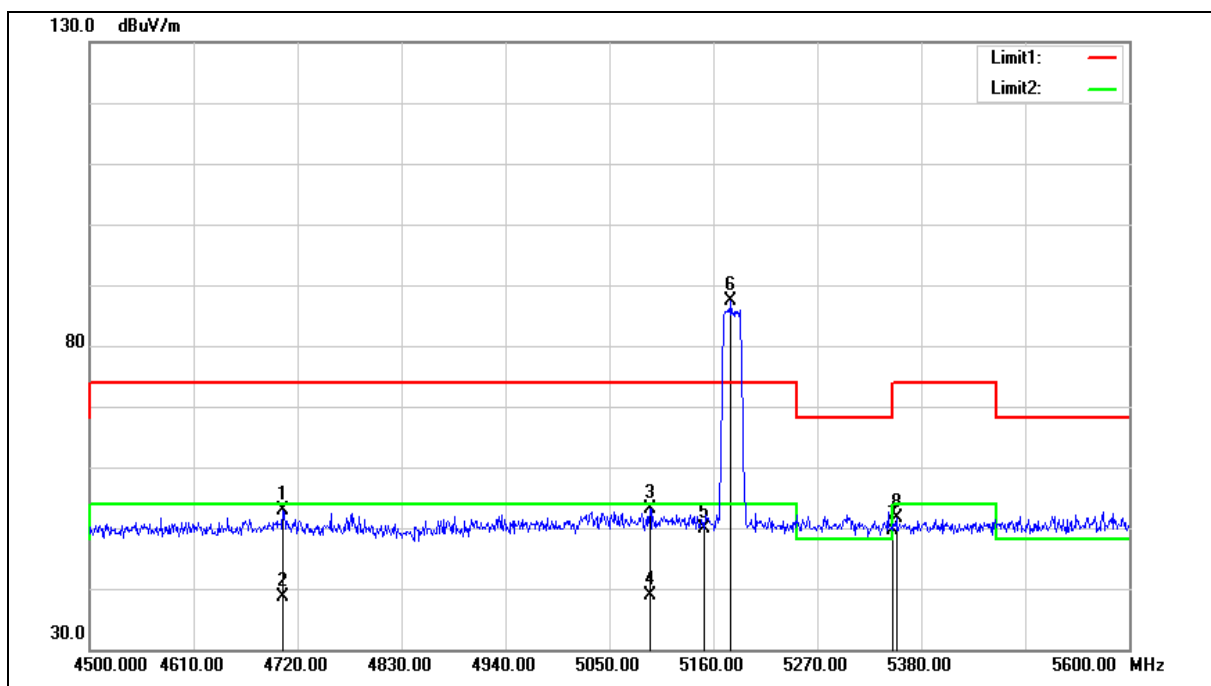

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4704.600	54.34	-1.58	52.76	74.00	-21.24	peak
2	4704.600	40.31	-1.58	38.73	54.00	-15.27	AVG
3	5092.900	53.67	-0.60	53.07	74.00	-20.93	peak
4	5092.900	39.60	-0.60	39.00	54.00	-15.00	AVG
5	5150.000	50.45	-0.48	49.97	74.00	-24.03	peak
6	5178.700	87.91	-0.42	87.49	--	--	peak
7	5350.000	49.80	-0.08	49.72	74.00	-24.28	peak
8	5353.600	51.60	-0.08	51.52	74.00	-22.48	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

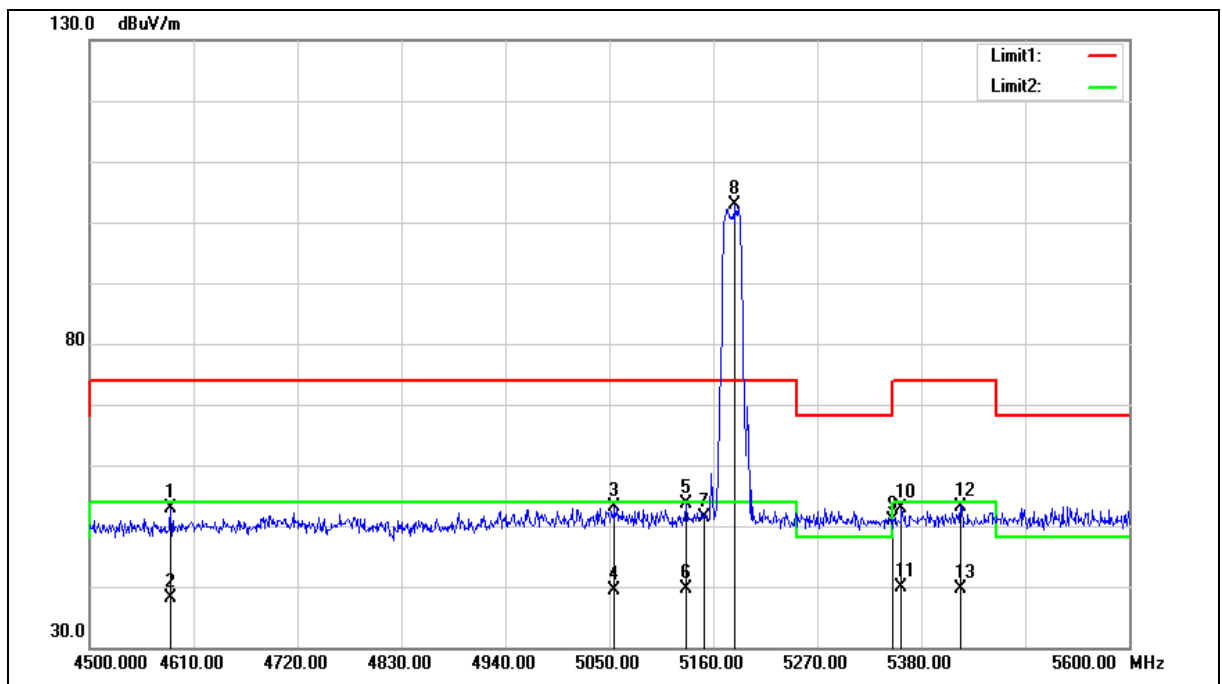

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4585.800	54.70	-1.91	52.79	74.00	-21.21	peak
2	4585.800	40.13	-1.91	38.22	54.00	-15.78	AVG
3	5055.500	53.76	-0.66	53.10	74.00	-20.90	peak
4	5055.500	39.98	-0.66	39.32	54.00	-14.68	AVG
5	5131.400	54.11	-0.51	53.60	74.00	-20.40	peak
6	5131.400	40.04	-0.51	39.53	54.00	-14.47	AVG
7	5150.000	51.83	-0.48	51.35	74.00	-22.65	peak
8	5183.100	103.28	-0.40	102.88	--	--	peak
9	5350.000	51.08	-0.08	51.00	74.00	-23.00	peak
10	5359.100	52.94	-0.06	52.88	74.00	-21.12	peak
11	5359.100	39.83	-0.06	39.77	54.00	-14.23	AVG
12	5421.800	53.19	0.06	53.25	74.00	-20.75	peak
13	5421.800	39.69	0.06	39.75	54.00	-14.25	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

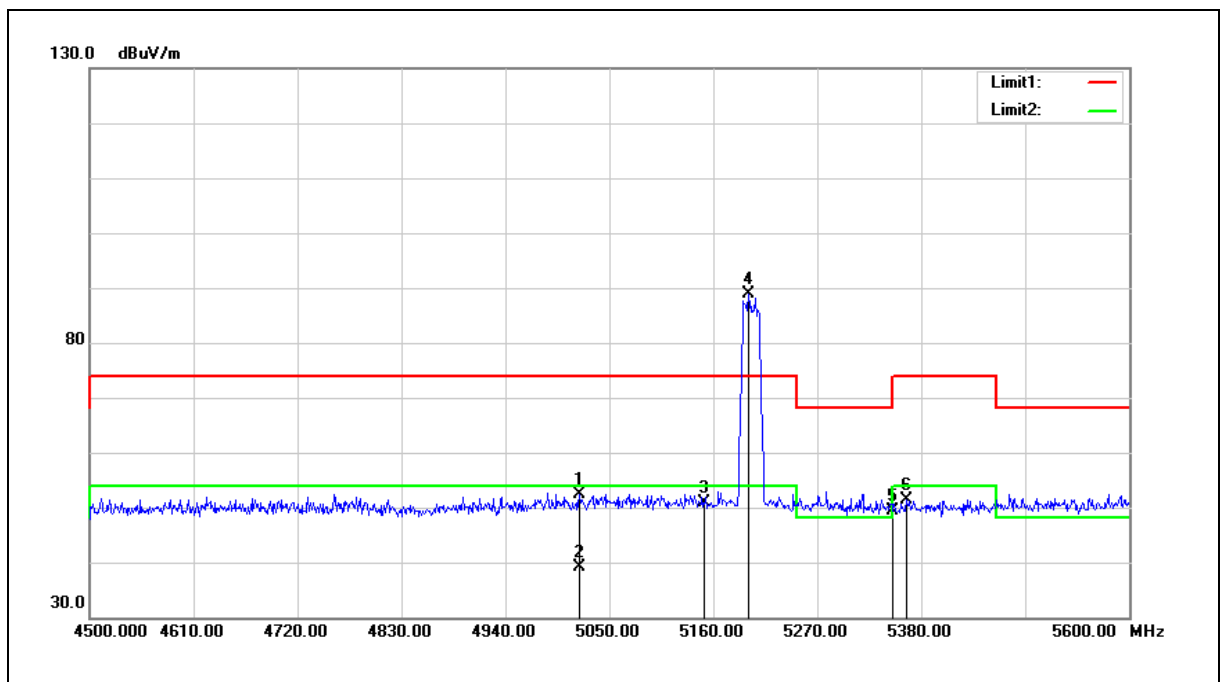


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5018.100	53.06	-0.74	52.32	74.00	-21.68	peak
2	5018.100	39.80	-0.74	39.06	54.00	-14.94	AVG
3	5150.000	51.37	-0.48	50.89	74.00	-23.11	peak
4	5197.400	89.20	-0.38	88.82	--	--	peak
5	5350.000	49.54	-0.08	49.46	74.00	-24.54	peak
6	5364.600	51.49	-0.05	51.44	74.00	-22.56	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

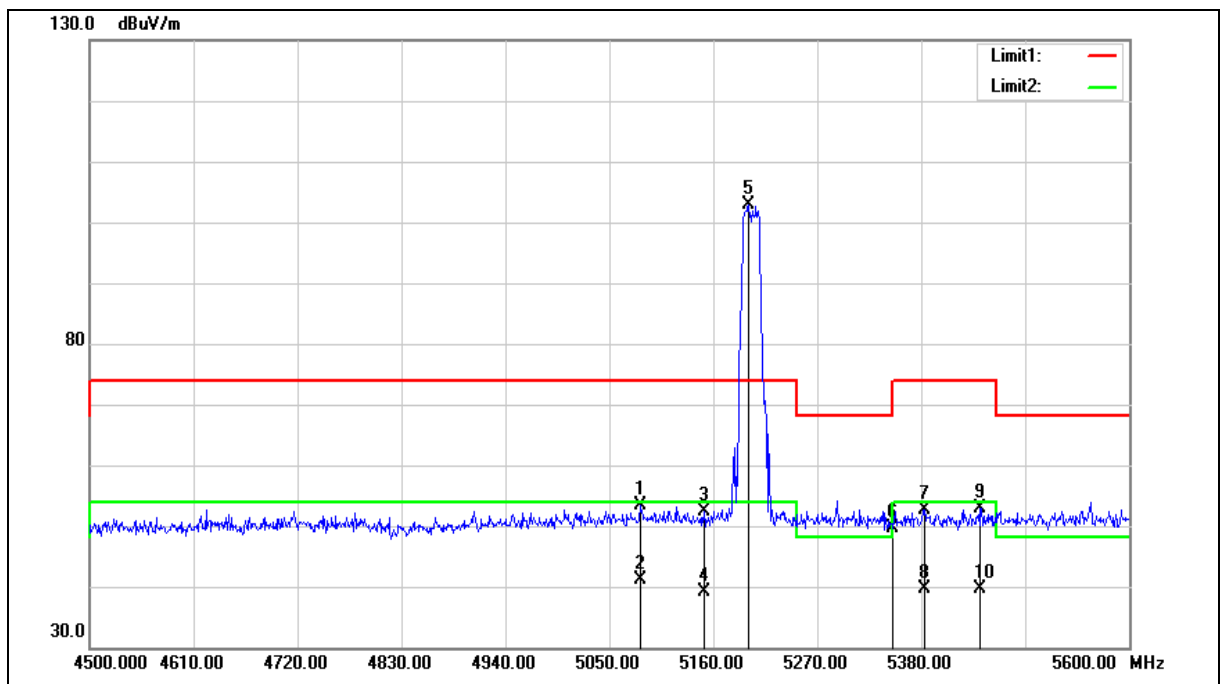

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5083.000	53.98	-0.60	53.38	74.00	-20.62	peak
2	5083.000	41.80	-0.60	41.20	54.00	-12.80	AVG
3	5150.000	52.85	-0.48	52.37	74.00	-21.63	peak
4	5150.000	39.73	-0.48	39.25	54.00	-14.75	AVG
5	5197.400	103.16	-0.38	102.78	--	--	peak
6	5350.000	49.81	-0.08	49.73	74.00	-24.27	peak
7	5383.300	52.61	-0.02	52.59	74.00	-21.41	peak
8	5383.300	39.63	-0.02	39.61	54.00	-14.39	AVG
9	5441.600	52.86	0.09	52.95	74.00	-21.05	peak
10	5441.600	39.55	0.09	39.64	54.00	-14.36	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

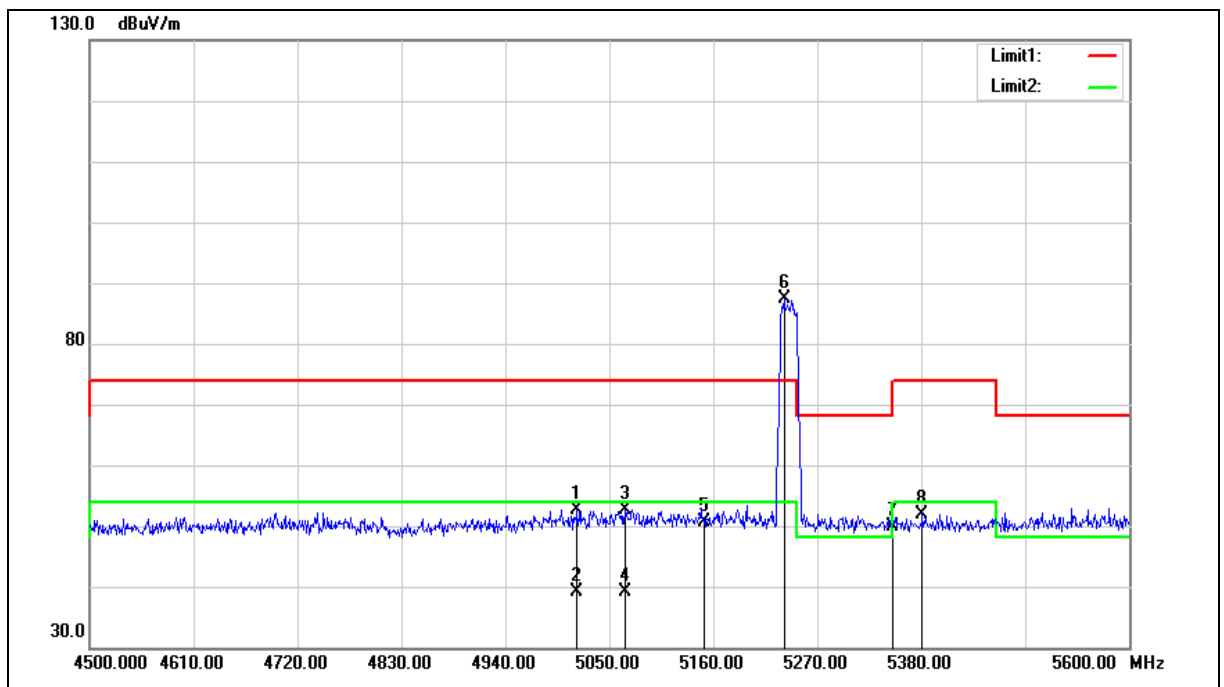

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5015.900	53.47	-0.74	52.73	74.00	-21.27	peak
2	5015.900	39.79	-0.74	39.05	54.00	-14.95	AVG
3	5066.500	53.21	-0.64	52.57	74.00	-21.43	peak
4	5066.500	39.87	-0.64	39.23	54.00	-14.77	AVG
5	5150.000	51.18	-0.48	50.70	74.00	-23.30	peak
6	5234.800	87.71	-0.31	87.40	--	--	peak
7	5350.000	50.03	-0.08	49.95	74.00	-24.05	peak
8	5381.100	51.97	-0.03	51.94	74.00	-22.06	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

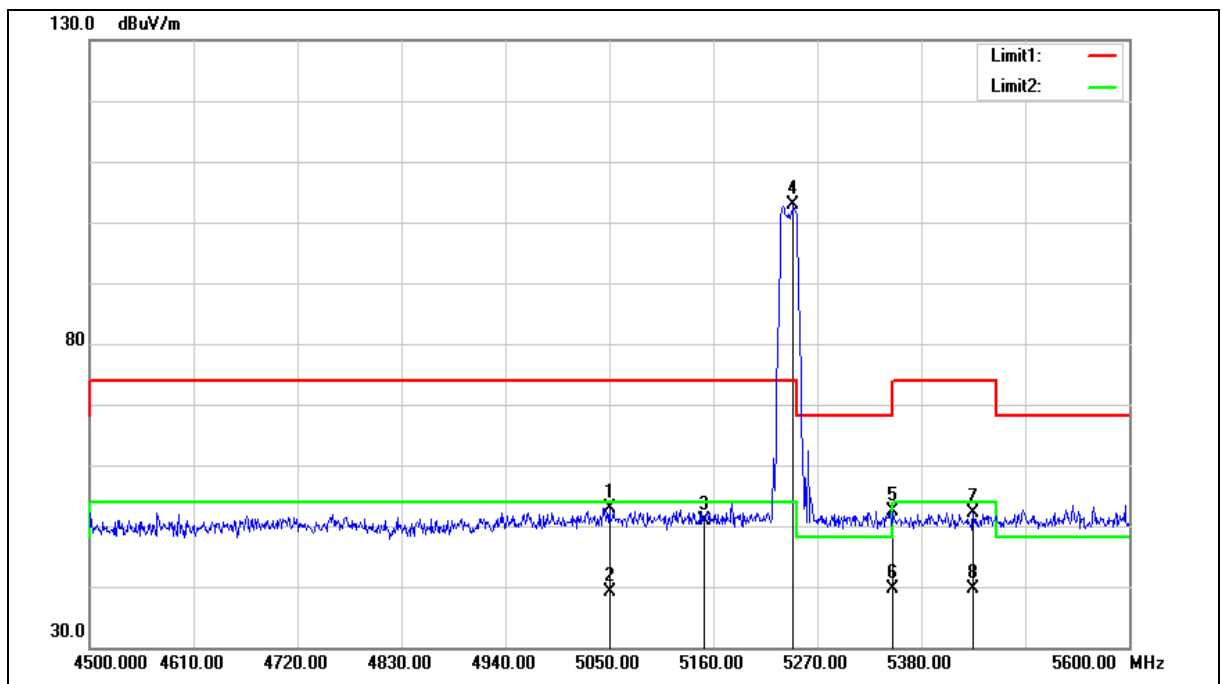

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5050.000	53.68	-0.68	53.00	74.00	-21.00	peak
2	5050.000	39.91	-0.68	39.23	54.00	-14.77	AVG
3	5150.000	51.44	-0.48	50.96	74.00	-23.04	peak
4	5244.700	103.04	-0.28	102.76	--	--	peak
5	5350.000	52.44	-0.08	52.36	74.00	-21.64	peak
6	5350.000	39.81	-0.08	39.73	54.00	-14.27	AVG
7	5435.000	52.16	0.09	52.25	74.00	-21.75	peak
8	5435.000	39.46	0.09	39.55	54.00	-14.45	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

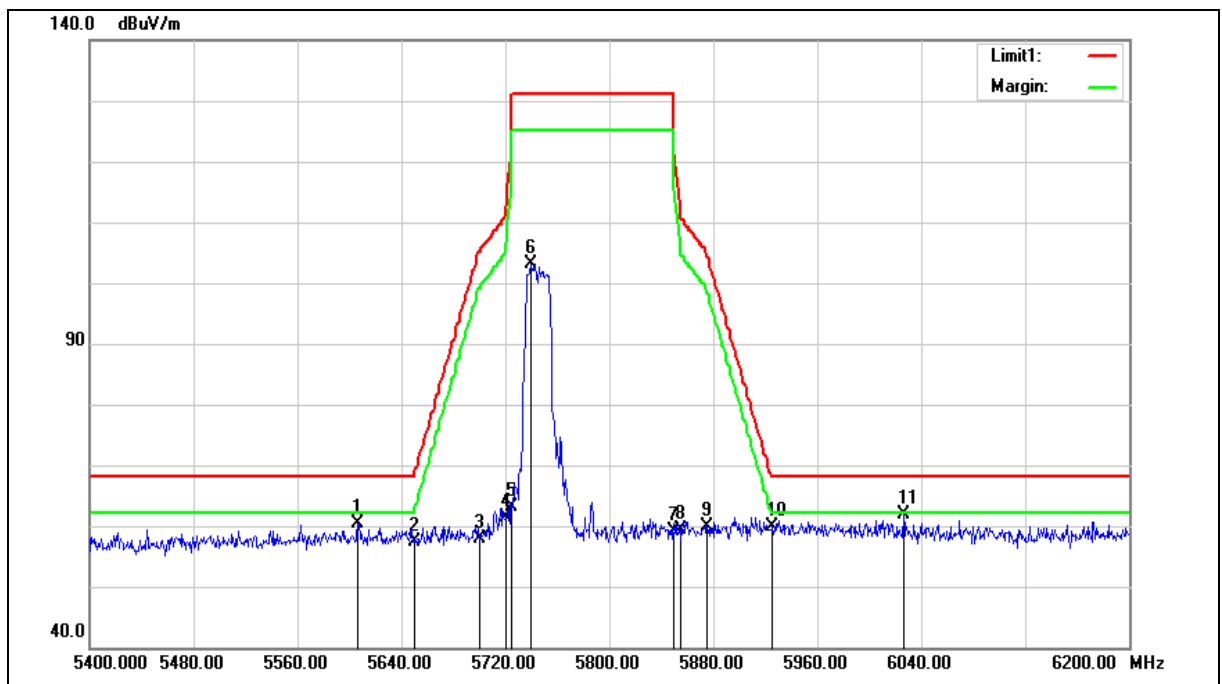

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5606.400	59.88	0.50	60.38	68.20	-7.82	peak
2	5650.000	56.83	0.62	57.45	68.20	-10.75	peak
3	5700.000	57.23	0.75	57.98	105.20	-47.22	peak
4	5720.000	60.47	0.81	61.28	110.80	-49.52	peak
5	5725.000	62.38	0.82	63.20	122.20	-59.00	peak
6	5739.200	102.21	0.86	103.07	--	--	peak
7	5850.000	58.05	1.17	59.22	122.20	-62.98	peak
8	5855.000	58.29	1.18	59.47	110.80	-51.33	peak
9	5875.000	58.65	1.23	59.88	105.20	-45.32	peak
10	5925.000	58.44	1.37	59.81	68.20	-8.39	peak
11	6026.400	60.15	1.66	61.81	68.20	-6.39	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

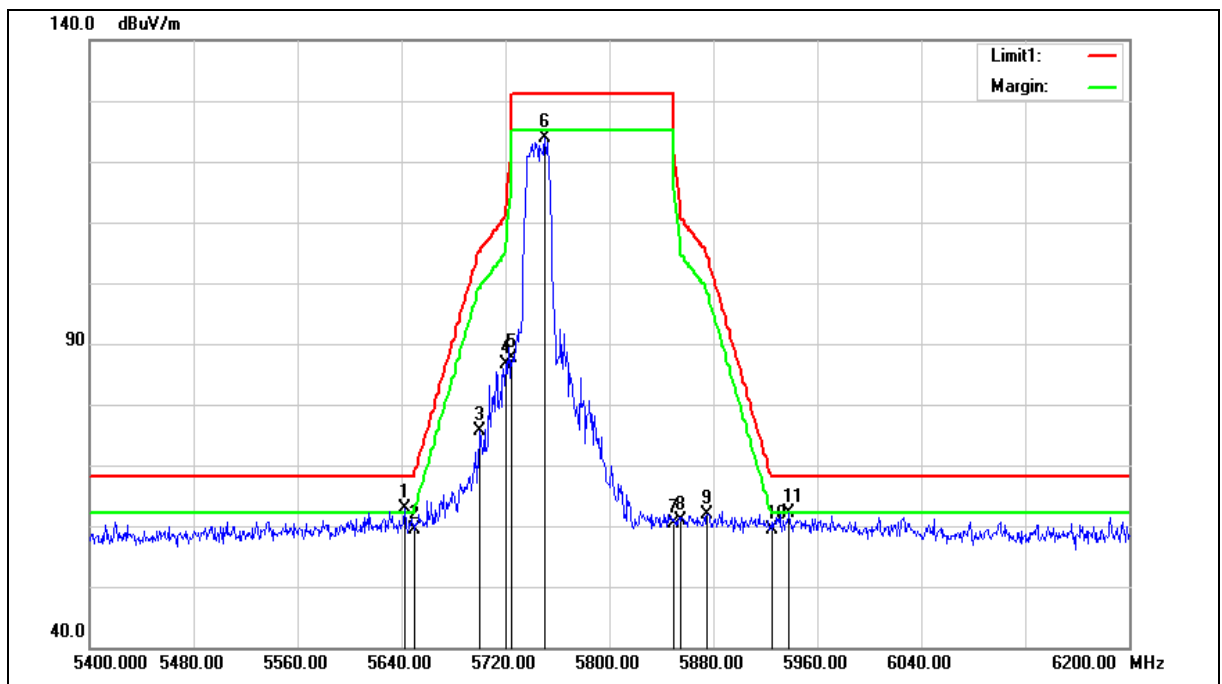

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5642.400	62.35	0.60	62.95	68.20	-5.25	peak
2	5650.000	58.88	0.62	59.50	68.20	-8.70	peak
3	5700.000	74.86	0.75	75.61	105.20	-29.59	peak
4	5720.000	85.80	0.81	86.61	110.80	-24.19	peak
5	5725.000	86.90	0.82	87.72	122.20	-34.48	peak
6	5750.400	122.88	0.90	123.78	--	--	peak
7	5850.000	59.18	1.17	60.35	122.20	-61.85	peak
8	5855.000	59.68	1.18	60.86	110.80	-49.94	peak
9	5875.000	60.67	1.23	61.90	105.20	-43.30	peak
10	5925.000	57.95	1.37	59.32	68.20	-8.88	peak
11	5938.400	60.81	1.40	62.21	68.20	-5.99	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

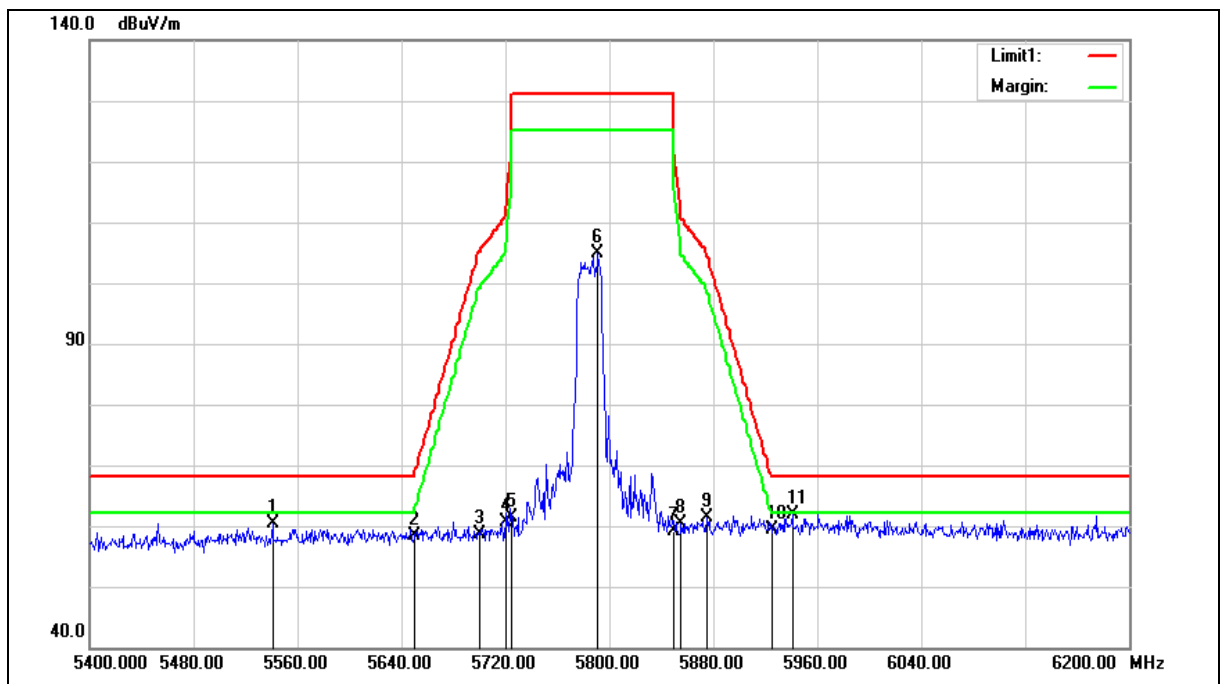

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5540.800	60.06	0.33	60.39	68.20	-7.81	peak
2	5650.000	57.81	0.62	58.43	68.20	-9.77	peak
3	5700.000	57.98	0.75	58.73	105.20	-46.47	peak
4	5720.000	59.94	0.81	60.75	110.80	-50.05	peak
5	5725.000	60.44	0.82	61.26	122.20	-60.94	peak
6	5791.200	103.81	1.01	104.82	--	--	peak
7	5850.000	57.84	1.17	59.01	122.20	-63.19	peak
8	5855.000	59.31	1.18	60.49	110.80	-50.31	peak
9	5875.000	60.05	1.23	61.28	105.20	-43.92	peak
10	5925.000	58.10	1.37	59.47	68.20	-8.73	peak
11	5940.800	60.57	1.42	61.99	68.20	-6.21	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

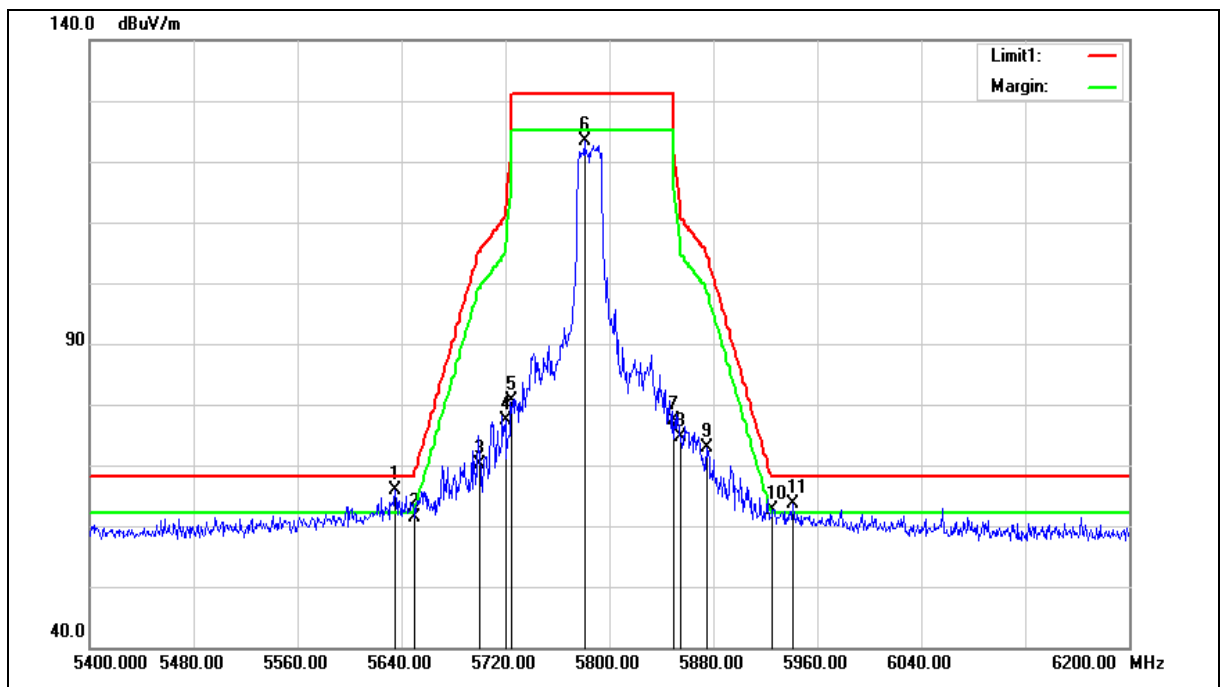

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5635.200	65.21	0.59	65.80	68.20	-2.40	peak
2	5650.000	60.79	0.62	61.41	68.20	-6.79	peak
3	5700.000	69.32	0.75	70.07	105.20	-35.13	peak
4	5720.000	76.47	0.81	77.28	110.80	-33.52	peak
5	5725.000	79.88	0.82	80.70	122.20	-41.50	peak
6	5780.800	122.50	0.98	123.48	--	--	peak
7	5850.000	76.32	1.17	77.49	122.20	-44.71	peak
8	5855.000	73.41	1.18	74.59	110.80	-36.21	peak
9	5875.000	71.63	1.23	72.86	105.20	-32.34	peak
10	5925.000	61.22	1.37	62.59	68.20	-5.61	peak
11	5940.800	62.13	1.42	63.55	68.20	-4.65	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

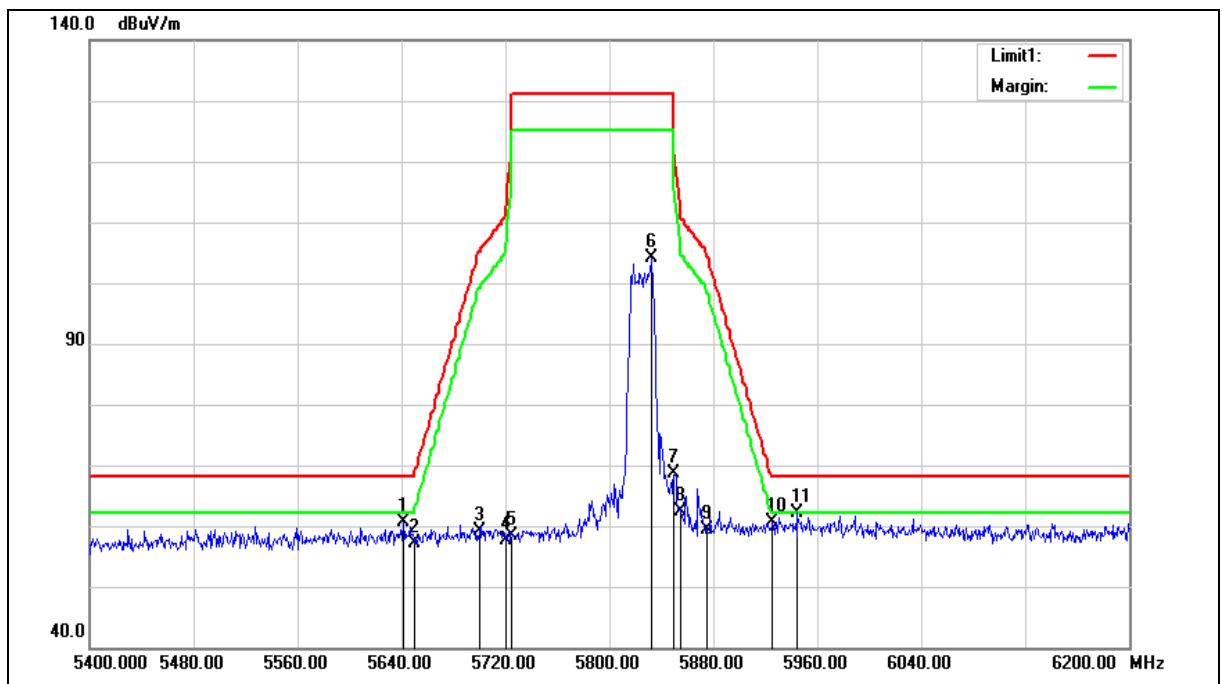

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5641.600	59.94	0.60	60.54	68.20	-7.66	peak
2	5650.000	56.59	0.62	57.21	68.20	-10.99	peak
3	5700.000	58.38	0.75	59.13	105.20	-46.07	peak
4	5720.000	56.75	0.81	57.56	110.80	-53.24	peak
5	5725.000	57.63	0.82	58.45	122.20	-63.75	peak
6	5832.800	103.07	1.11	104.18	--	--	peak
7	5850.000	67.34	1.17	68.51	122.20	-53.69	peak
8	5855.000	61.16	1.18	62.34	110.80	-48.46	peak
9	5875.000	58.25	1.23	59.48	105.20	-45.72	peak
10	5925.000	59.30	1.37	60.67	68.20	-7.53	peak
11	5944.800	60.65	1.42	62.07	68.20	-6.13	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

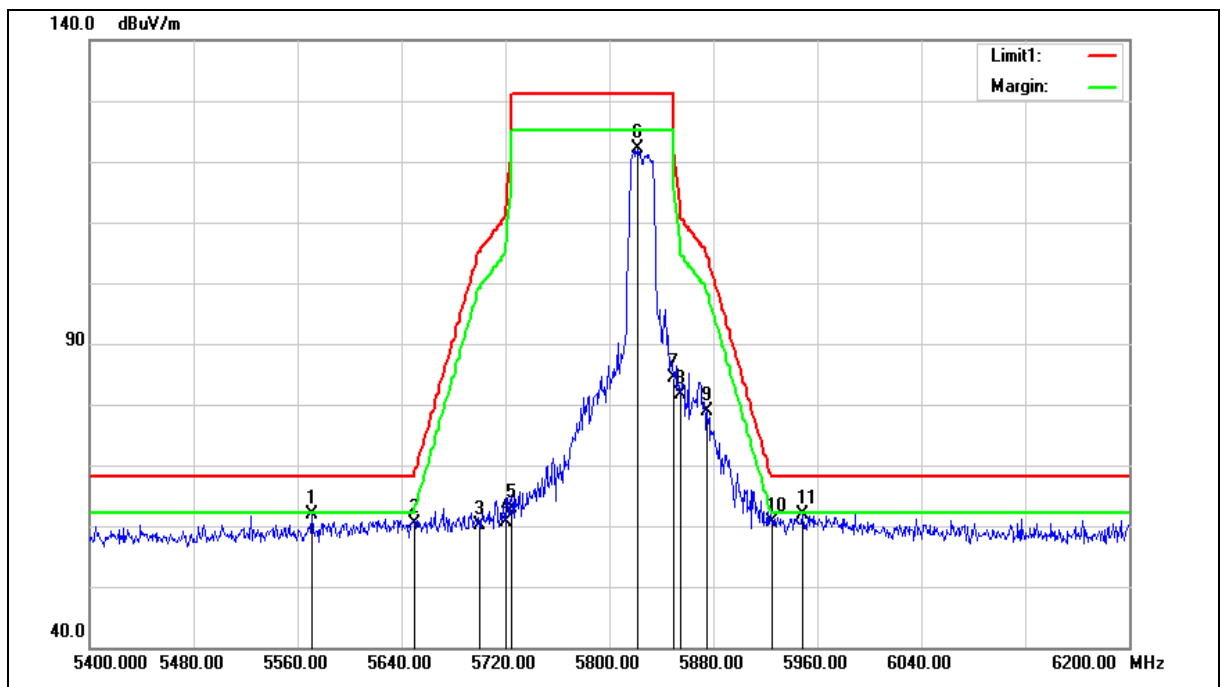

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5571.200	61.42	0.40	61.82	68.20	-6.38	peak
2	5650.000	59.81	0.62	60.43	68.20	-7.77	peak
3	5700.000	59.48	0.75	60.23	105.20	-44.97	peak
4	5720.000	59.83	0.81	60.64	110.80	-50.16	peak
5	5725.000	61.99	0.82	62.81	122.20	-59.39	peak
6	5821.600	120.99	1.09	122.08	--	--	peak
7	5850.000	83.25	1.17	84.42	122.20	-37.78	peak
8	5855.000	80.42	1.18	81.60	110.80	-29.20	peak
9	5875.000	77.62	1.23	78.85	105.20	-26.35	peak
10	5925.000	59.18	1.37	60.55	68.20	-7.65	peak
11	5948.800	60.47	1.43	61.90	68.20	-6.30	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

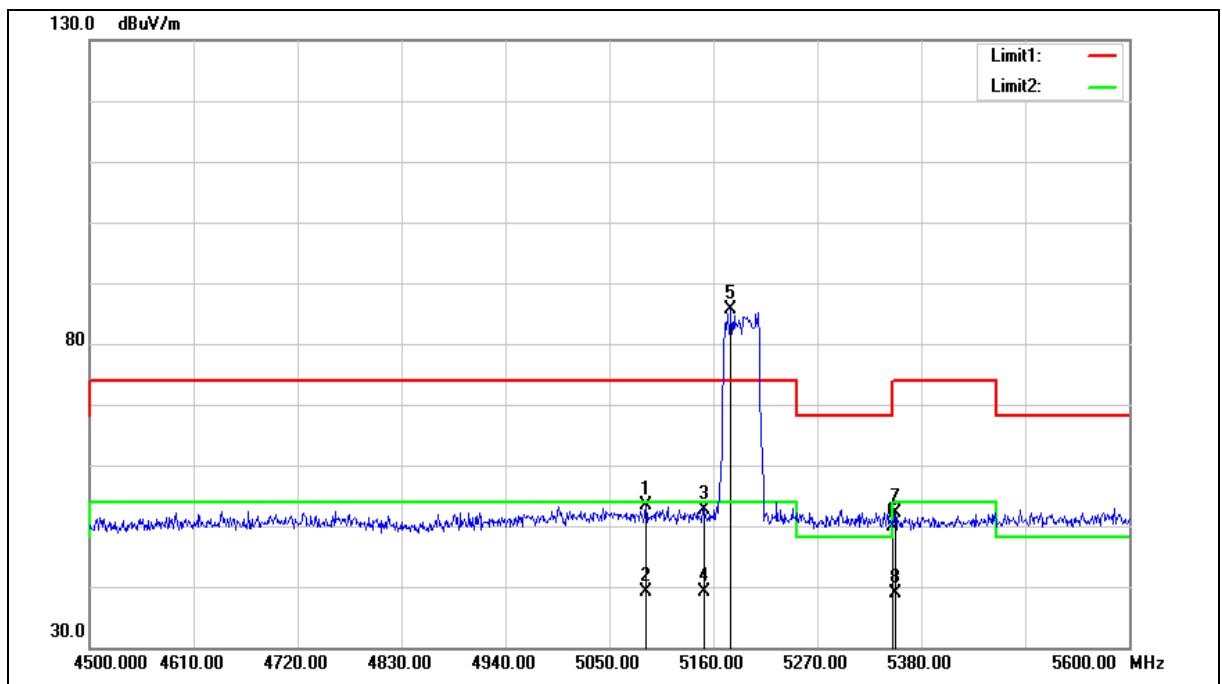

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.500	54.02	-0.60	53.42	74.00	-20.58	peak
2	5088.500	39.65	-0.60	39.05	54.00	-14.95	AVG
3	5150.000	53.00	-0.48	52.52	74.00	-21.48	peak
4	5150.000	39.63	-0.48	39.15	54.00	-14.85	AVG
5	5178.700	86.06	-0.42	85.64	--	-	peak
6	5350.000	50.05	-0.08	49.97	74.00	-24.03	peak
7	5352.500	52.27	-0.08	52.19	74.00	-21.81	peak
8	5352.500	38.94	-0.08	38.86	54.00	-15.14	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

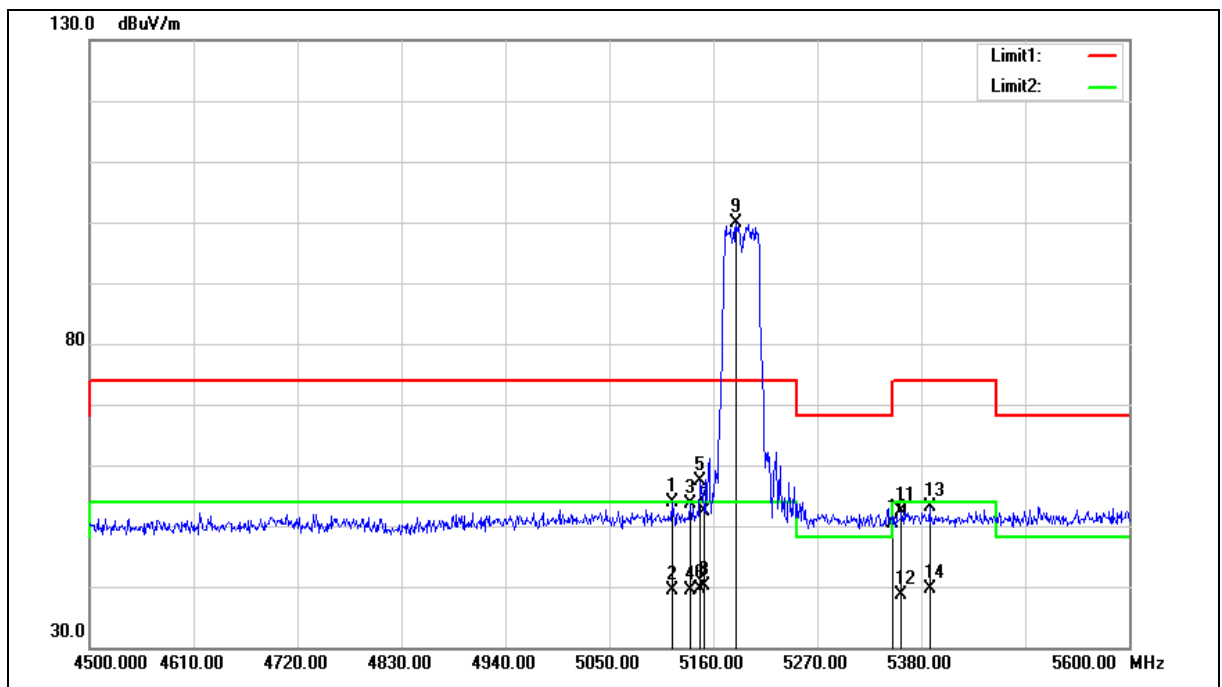

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5116.000	54.31	-0.54	53.77	74.00	-20.23	peak
2	5116.000	39.95	-0.54	39.41	54.00	-14.59	AVG
3	5135.800	54.12	-0.50	53.62	74.00	-20.38	peak
4	5135.800	39.95	-0.50	39.45	54.00	-14.55	AVG
5	5145.700	57.88	-0.48	57.40	74.00	-16.60	peak
6	5145.700	40.10	-0.48	39.62	54.00	-14.38	AVG
7	5150.000	52.83	-0.48	52.35	74.00	-21.65	peak
8	5150.000	40.68	-0.48	40.20	54.00	-13.80	AVG
9	5184.200	100.19	-0.40	99.79	--	--	peak
10	5350.000	50.42	-0.08	50.34	74.00	-23.66	peak
11	5359.100	52.39	-0.06	52.33	74.00	-21.67	peak
12	5359.100	38.64	-0.06	38.58	54.00	-15.42	AVG
13	5388.800	53.13	0.00	53.13	74.00	-20.87	peak
14	5388.800	39.72	0.00	39.72	54.00	-14.28	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

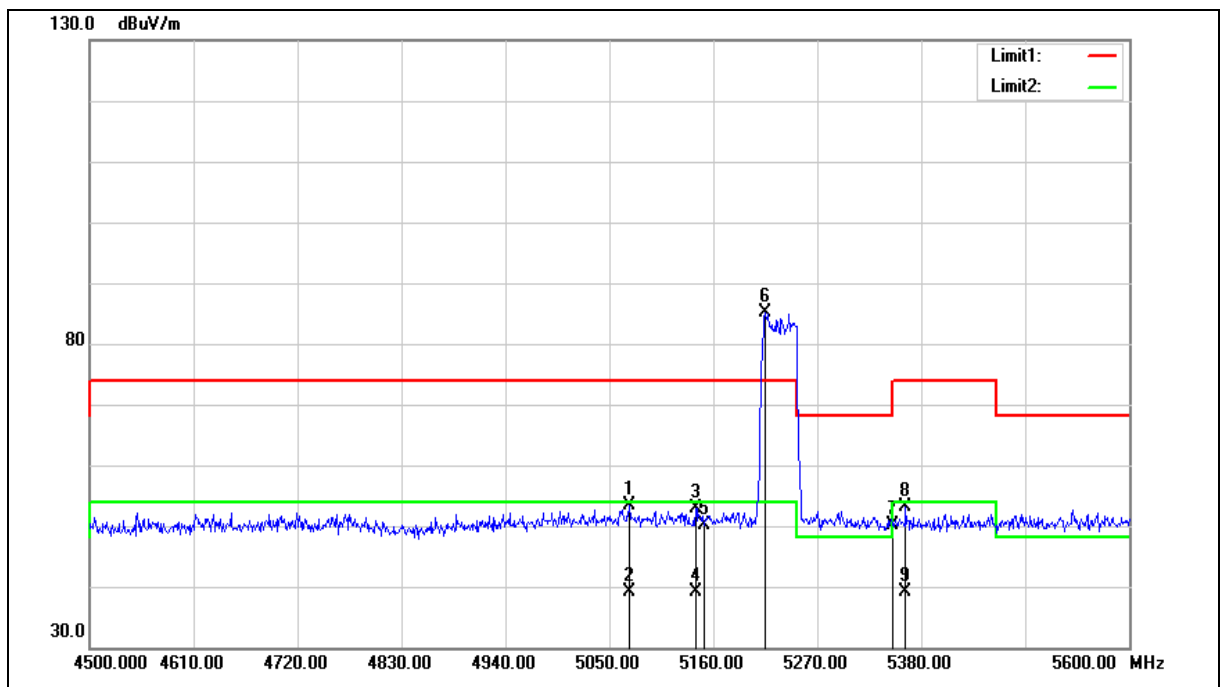

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5070.900	53.97	-0.63	53.34	74.00	-20.66	peak
2	5070.900	39.88	-0.63	39.25	54.00	-14.75	AVG
3	5141.300	53.43	-0.49	52.94	74.00	-21.06	peak
4	5141.300	39.55	-0.49	39.06	54.00	-14.94	AVG
5	5150.000	50.61	-0.48	50.13	74.00	-23.87	peak
6	5215.000	85.59	-0.35	85.24	--	--	peak
7	5350.000	50.32	-0.08	50.24	74.00	-23.76	peak
8	5363.500	53.12	-0.06	53.06	74.00	-20.94	peak
9	5363.500	39.22	-0.06	39.16	54.00	-14.84	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

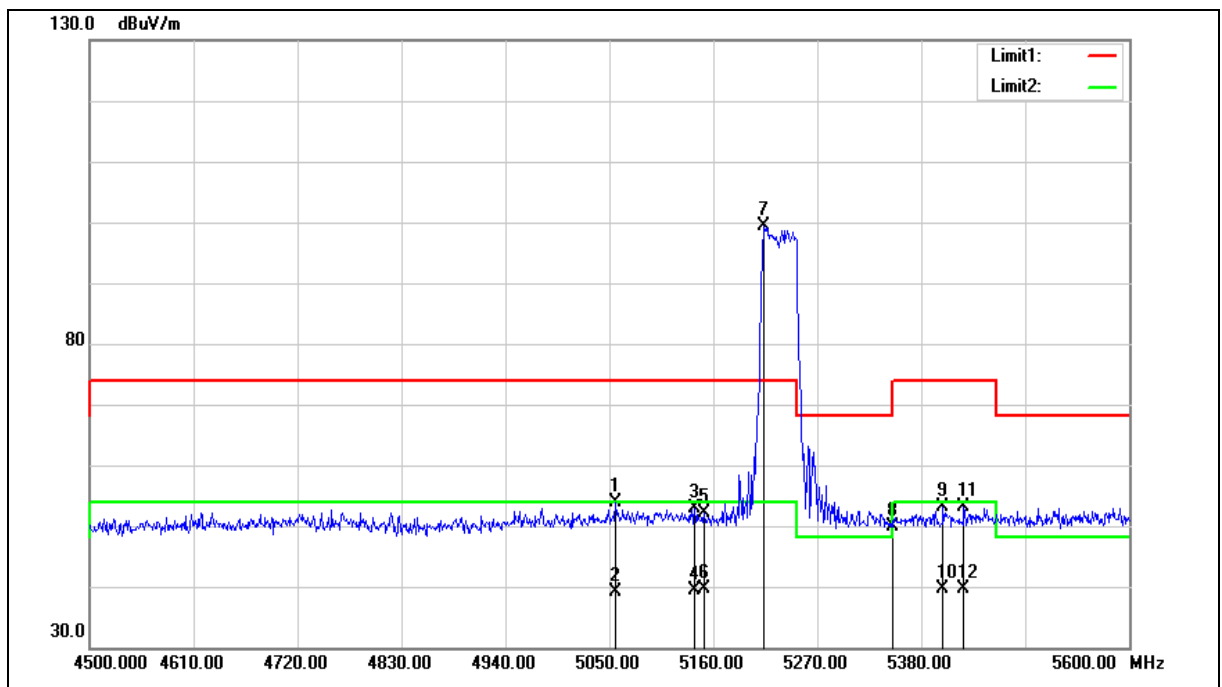

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5056.600	54.51	-0.65	53.86	74.00	-20.14	peak
2	5056.600	39.83	-0.65	39.18	54.00	-14.82	AVG
3	5140.200	53.25	-0.49	52.76	74.00	-21.24	peak
4	5140.200	39.76	-0.49	39.27	54.00	-14.73	AVG
5	5150.000	52.53	-0.48	52.05	74.00	-21.95	peak
6	5150.000	40.00	-0.48	39.52	54.00	-14.48	AVG
7	5213.900	99.78	-0.35	99.43	--	--	peak
8	5350.000	50.02	-0.08	49.94	74.00	-24.06	peak
9	5403.100	53.05	0.02	53.07	74.00	-20.93	peak
10	5403.100	39.55	0.02	39.57	54.00	-14.43	AVG
11	5425.100	53.00	0.06	53.06	74.00	-20.94	peak
12	5425.100	39.60	0.06	39.66	54.00	-14.34	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

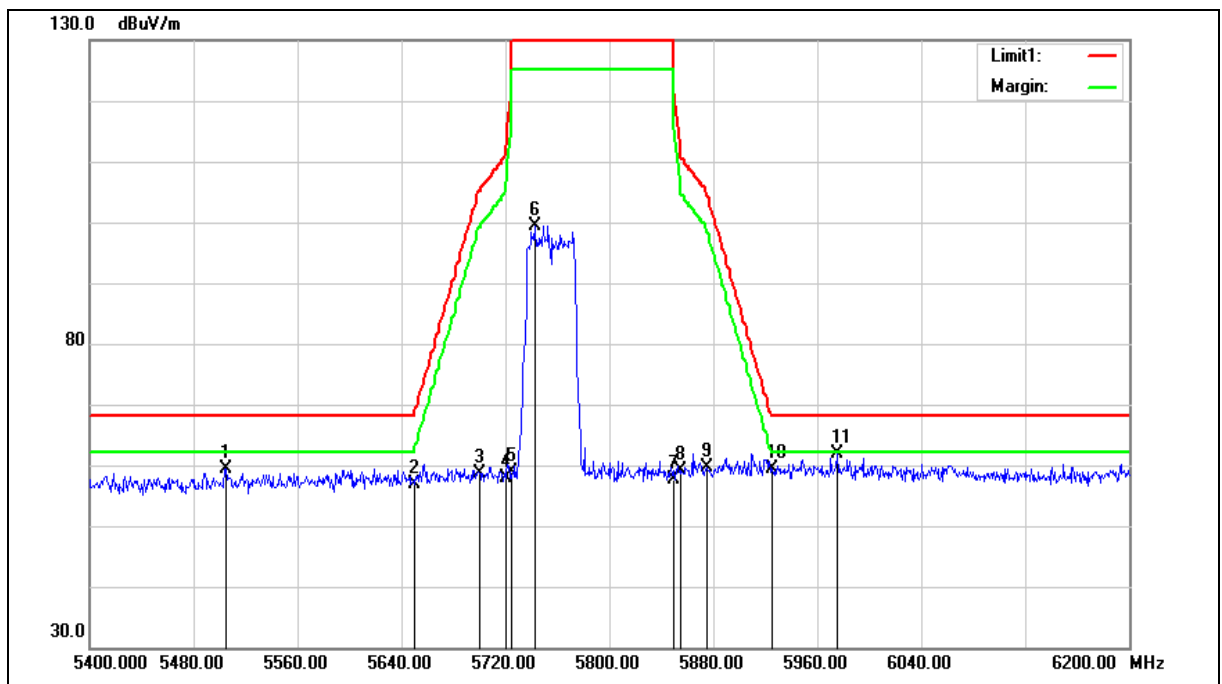

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5504.800	59.24	0.23	59.47	68.20	-8.73	peak
2	5650.000	56.14	0.62	56.76	68.20	-11.44	peak
3	5700.000	57.80	0.75	58.55	105.20	-46.65	peak
4	5720.000	57.16	0.81	57.97	110.80	-52.83	peak
5	5725.000	58.15	0.82	58.97	122.20	-63.23	peak
6	5742.400	98.49	0.87	99.36	--	--	peak
7	5850.000	56.42	1.17	57.59	122.20	-64.61	peak
8	5855.000	57.87	1.18	59.05	110.80	-51.75	peak
9	5875.000	58.38	1.23	59.61	105.20	-45.59	peak
10	5925.000	57.91	1.37	59.28	68.20	-8.92	peak
11	5975.200	60.49	1.50	61.99	68.20	-6.21	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

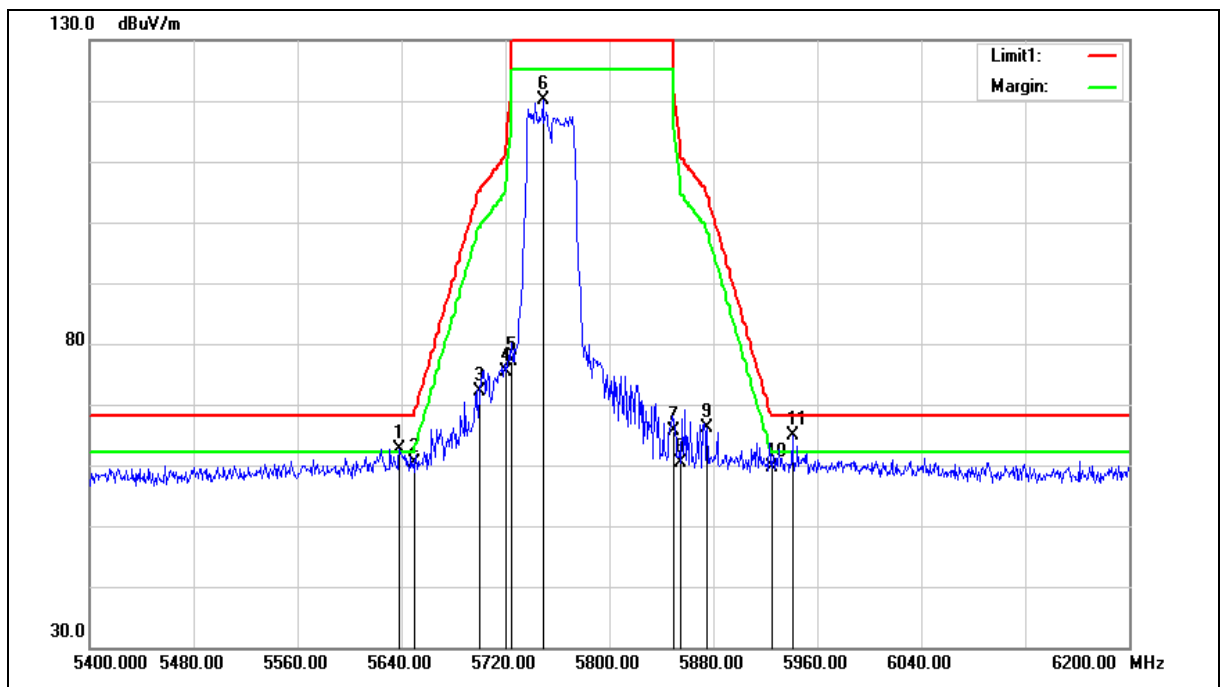

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5638.400	62.05	0.59	62.64	68.20	-5.56	peak
2	5650.000	59.74	0.62	60.36	68.20	-7.84	peak
3	5700.000	71.39	0.75	72.14	105.20	-33.06	peak
4	5720.000	74.65	0.81	75.46	110.80	-35.34	peak
5	5725.000	76.31	0.82	77.13	122.20	-45.07	peak
6	5748.800	119.30	0.89	120.19	--	--	peak
7	5850.000	64.55	1.17	65.72	122.20	-56.48	peak
8	5855.000	59.18	1.18	60.36	110.80	-50.44	peak
9	5875.000	64.83	1.23	66.06	105.20	-39.14	peak
10	5925.000	58.16	1.37	59.53	68.20	-8.67	peak
11	5940.800	63.39	1.42	64.81	68.20	-3.39	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

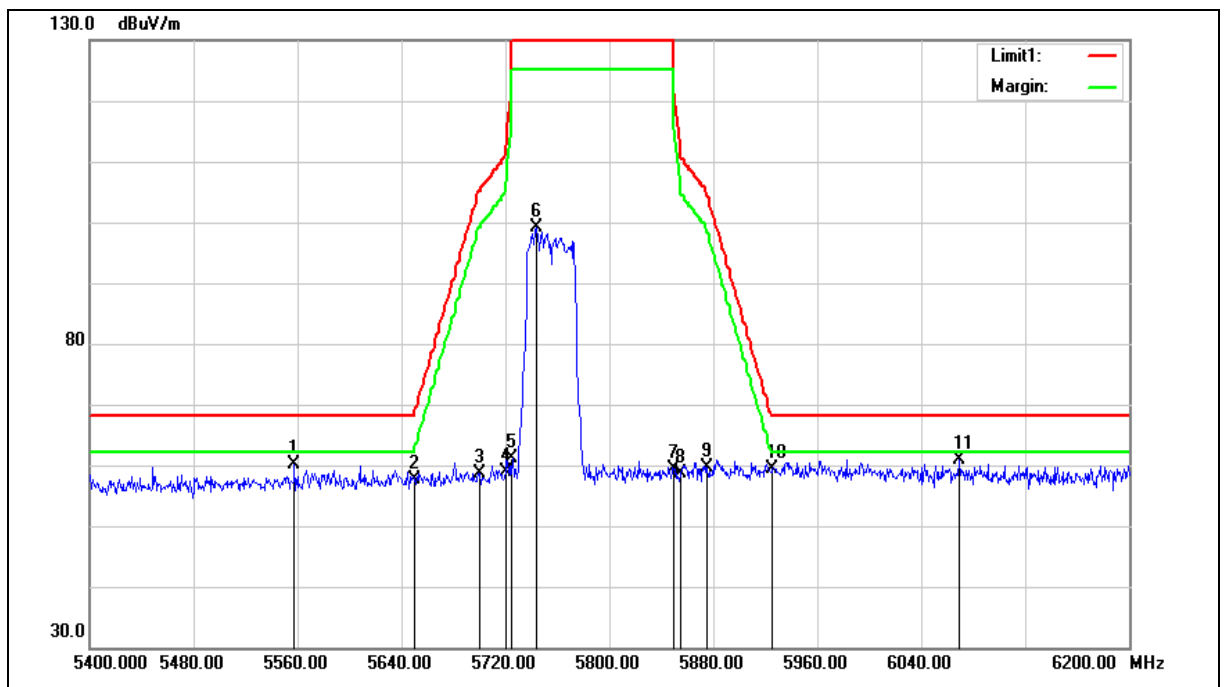

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5557.600	59.86	0.36	60.22	68.20	-7.98	peak
2	5650.000	57.04	0.62	57.66	68.20	-10.54	peak
3	5700.000	57.96	0.75	58.71	105.20	-46.49	peak
4	5720.000	58.12	0.81	58.93	110.80	-51.87	peak
5	5725.000	60.34	0.82	61.16	122.20	-61.04	peak
6	5744.000	98.14	0.87	99.01	--	--	peak
7	5850.000	58.24	1.17	59.41	122.20	-62.79	peak
8	5855.000	57.50	1.18	58.68	110.80	-52.12	peak
9	5875.000	58.36	1.23	59.59	105.20	-45.61	peak
10	5925.000	57.93	1.37	59.30	68.20	-8.90	peak
11	6069.600	59.06	1.81	60.87	68.20	-7.33	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

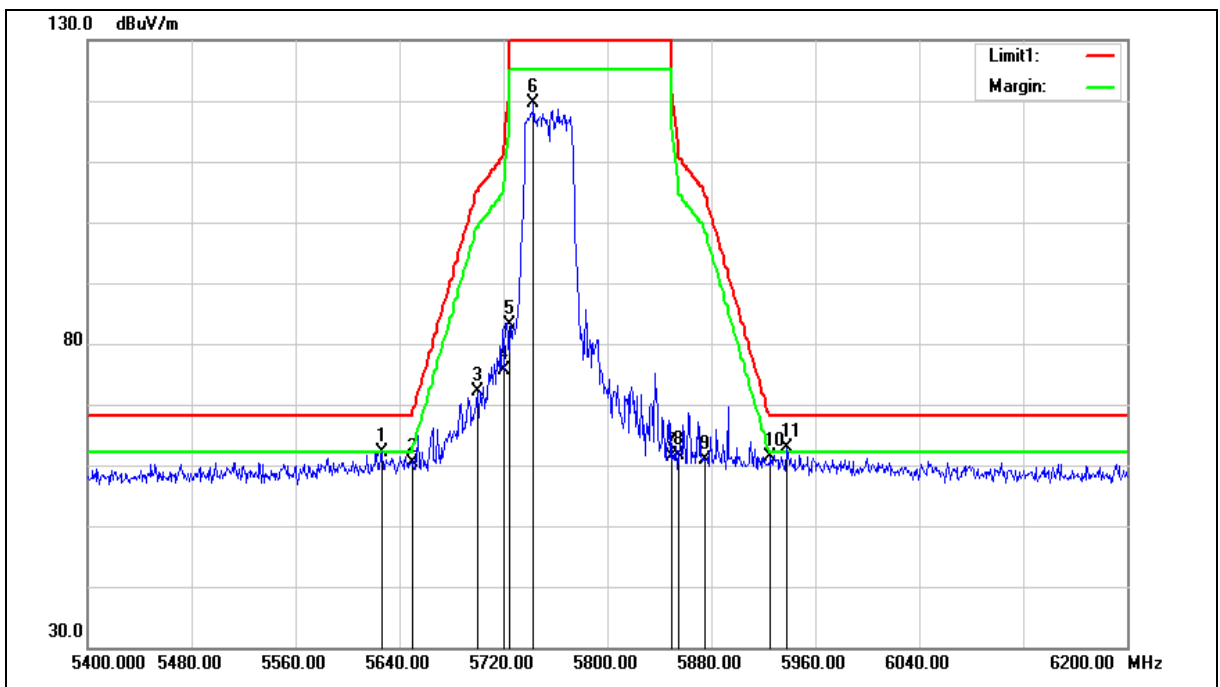

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5626.400	61.67	0.55	62.22	68.20	-5.98	peak
2	5650.000	59.73	0.62	60.35	68.20	-7.85	peak
3	5700.000	71.35	0.75	72.10	105.20	-33.10	peak
4	5720.000	74.80	0.81	75.61	110.80	-35.19	peak
5	5725.000	82.25	0.82	83.07	122.20	-39.13	peak
6	5743.200	118.75	0.87	119.62	--	--	peak
7	5850.000	60.13	1.17	61.30	122.20	-60.90	peak
8	5855.000	60.41	1.18	61.59	110.80	-49.21	peak
9	5875.000	59.68	1.23	60.91	105.20	-44.29	peak
10	5925.000	60.05	1.37	61.42	68.20	-6.78	peak
11	5938.400	61.49	1.40	62.89	68.20	-5.31	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

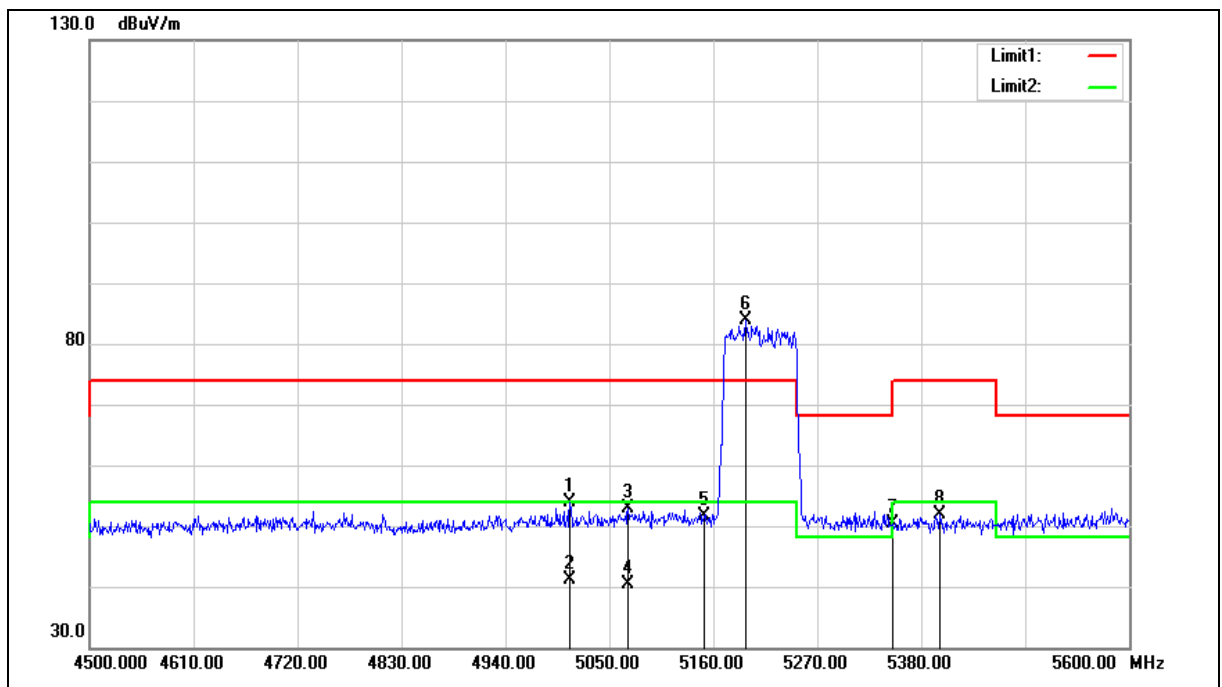

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5008.200	54.70	-0.75	53.95	74.00	-20.05	peak
2	5008.200	41.80	-0.75	41.05	54.00	-12.95	AVG
3	5069.800	53.43	-0.63	52.80	74.00	-21.20	peak
4	5069.800	41.08	-0.63	40.45	54.00	-13.55	AVG
5	5150.000	52.21	-0.48	51.73	74.00	-22.27	peak
6	5194.100	84.30	-0.39	83.91	--	--	peak
7	5350.000	50.41	-0.08	50.33	74.00	-23.67	peak
8	5399.800	51.74	0.02	51.76	74.00	-22.24	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

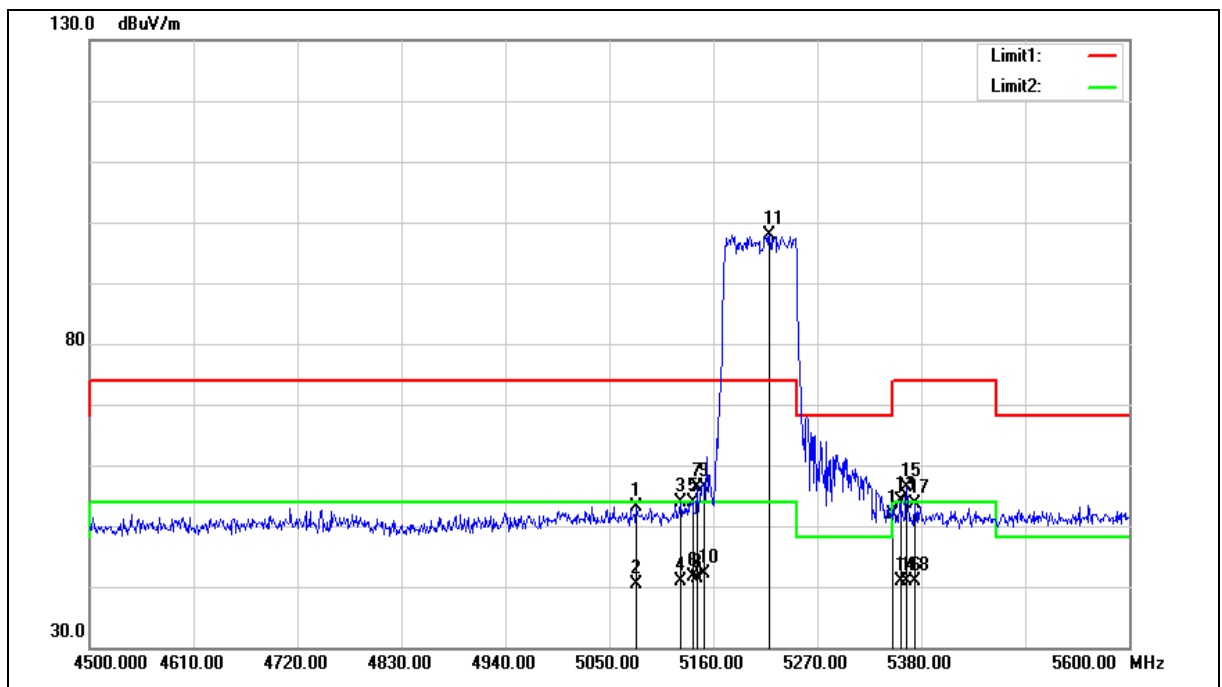

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.600	53.82	-0.62	53.20	74.00	-20.80	peak
2	5078.600	41.08	-0.62	40.46	54.00	-13.54	AVG
3	5124.800	54.51	-0.52	53.99	74.00	-20.01	peak
4	5124.800	41.49	-0.52	40.97	54.00	-13.03	AVG
5	5138.000	54.48	-0.49	53.99	74.00	-20.01	peak
6	5138.000	42.14	-0.49	41.65	54.00	-12.35	AVG
7	5142.400	56.85	-0.49	56.36	74.00	-17.64	peak
8	5142.400	41.77	-0.49	41.28	54.00	-12.72	AVG
9	5150.000	56.98	-0.48	56.50	74.00	-17.50	peak
10	5150.000	42.50	-0.48	42.02	54.00	-11.98	AVG
11	5219.400	98.22	-0.33	97.89	--	--	peak
12	5350.000	52.08	-0.08	52.00	74.00	-22.00	peak
13	5358.000	54.12	-0.06	54.06	74.00	-19.94	peak
14	5358.000	41.04	-0.06	40.98	54.00	-13.02	AVG
15	5364.600	56.46	-0.05	56.41	74.00	-17.59	peak
16	5364.600	40.90	-0.05	40.85	54.00	-13.15	AVG
17	5373.400	53.60	-0.03	53.57	74.00	-20.43	peak
18	5373.400	40.79	-0.03	40.76	54.00	-13.24	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

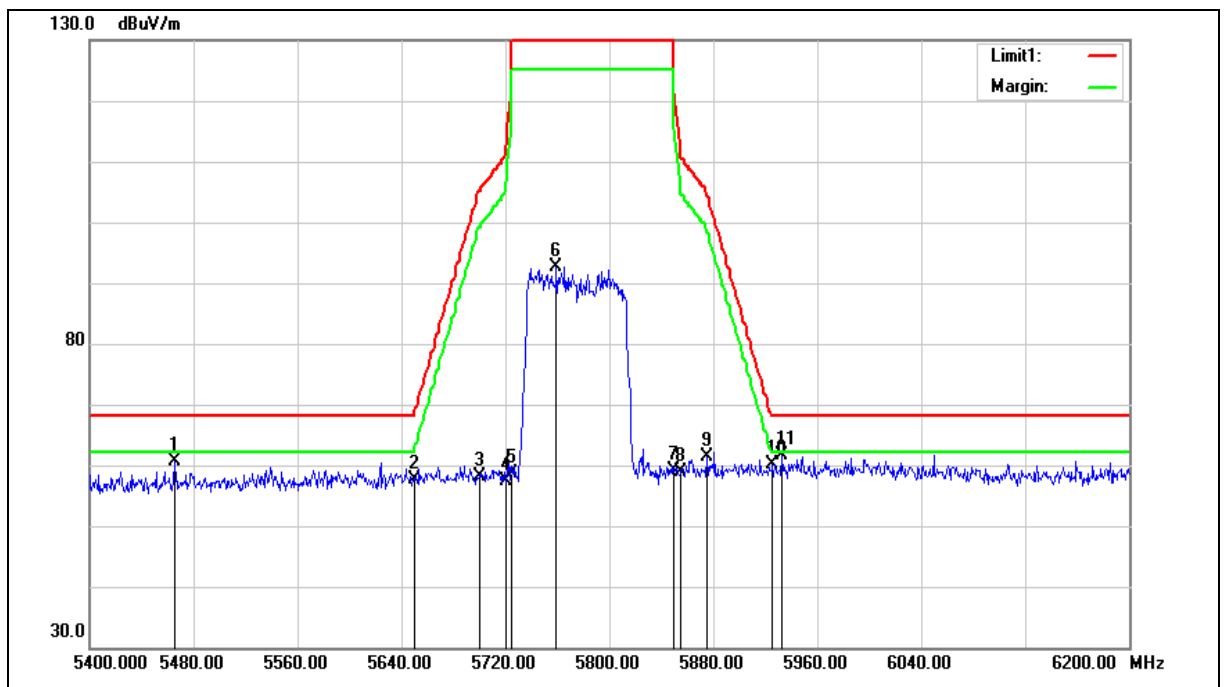

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5465.600	60.41	0.14	60.55	68.20	-7.65	peak
2	5650.000	57.11	0.62	57.73	68.20	-10.47	peak
3	5700.000	57.30	0.75	58.05	105.20	-47.15	peak
4	5720.000	56.57	0.81	57.38	110.80	-53.42	peak
5	5725.000	57.84	0.82	58.66	122.20	-63.54	peak
6	5759.200	91.79	0.91	92.70	--	--	peak
7	5850.000	58.05	1.17	59.22	122.20	-62.98	peak
8	5855.000	57.64	1.18	58.82	110.80	-51.98	peak
9	5875.000	60.18	1.23	61.41	105.20	-43.79	peak
10	5925.000	58.81	1.37	60.18	68.20	-8.02	peak
11	5932.800	60.33	1.38	61.71	68.20	-6.49	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

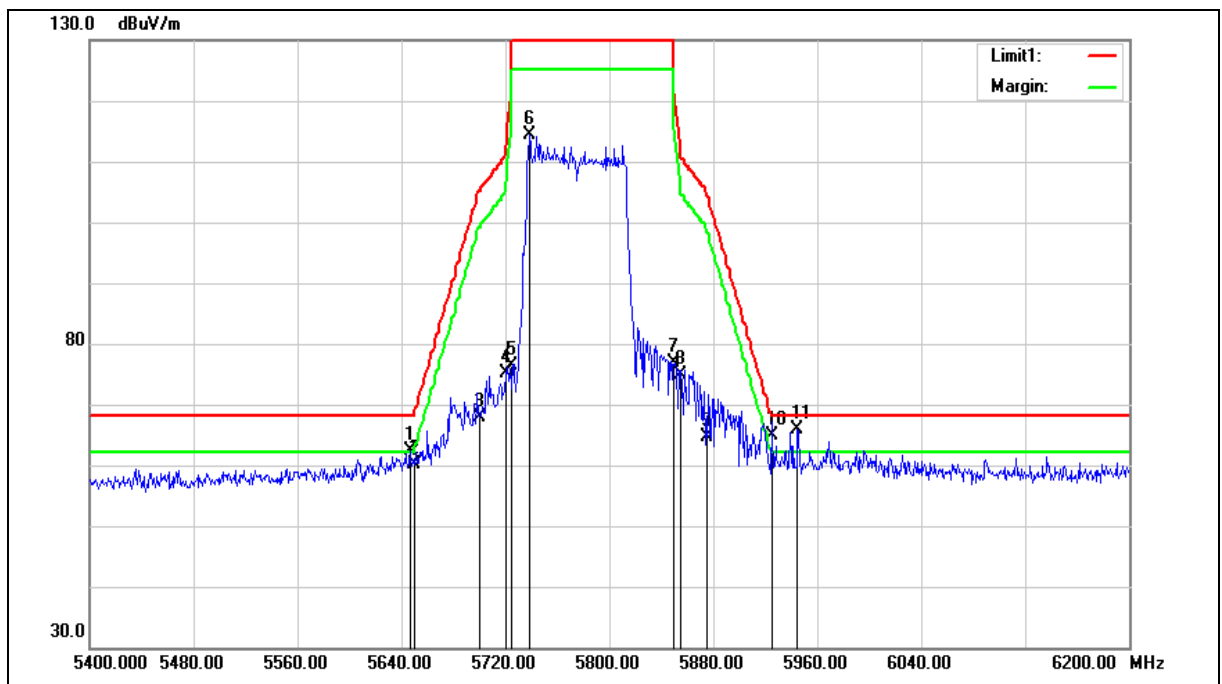

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.400	61.87	0.61	62.48	68.20	-5.72	peak
2	5650.000	59.39	0.62	60.01	68.20	-8.19	peak
3	5700.000	67.13	0.75	67.88	105.20	-37.32	peak
4	5720.000	74.27	0.81	75.08	110.80	-35.72	peak
5	5725.000	75.68	0.82	76.50	122.20	-45.70	peak
6	5738.400	113.46	0.86	114.32	--	--	peak
7	5850.000	75.79	1.17	76.96	122.20	-45.24	peak
8	5855.000	73.65	1.18	74.83	110.80	-35.97	peak
9	5875.000	63.37	1.23	64.60	105.20	-40.60	peak
10	5925.000	63.46	1.37	64.83	68.20	-3.37	peak
11	5944.800	64.55	1.42	65.97	68.20	-2.23	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

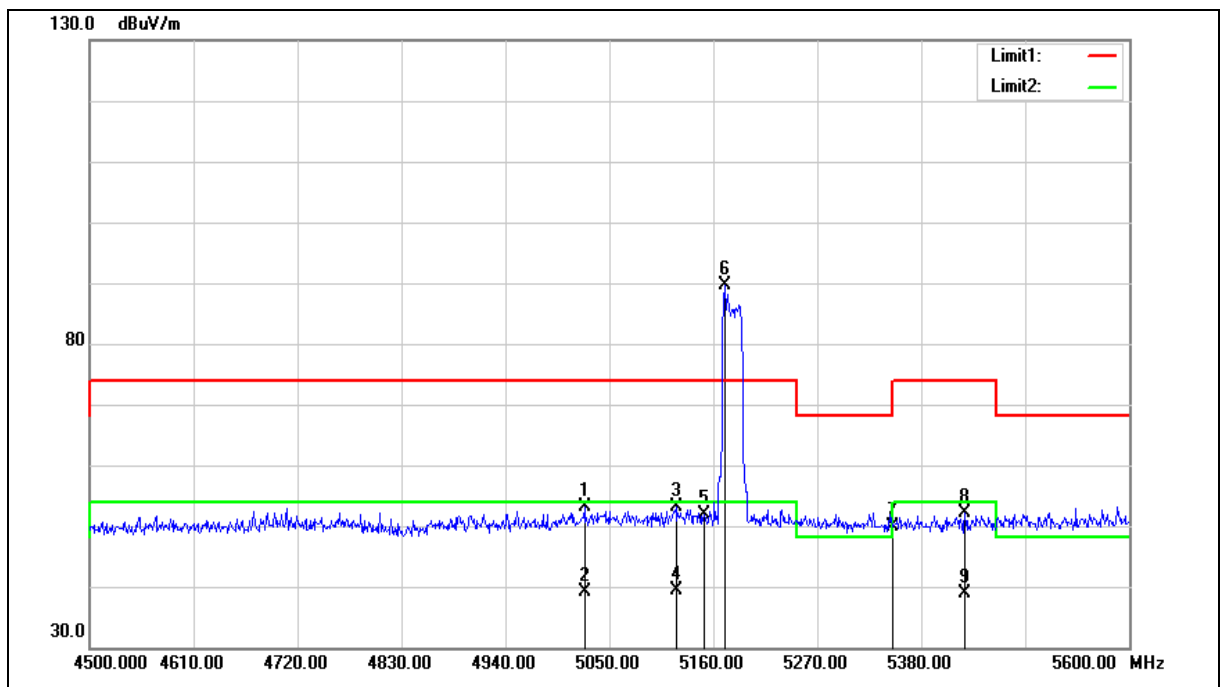

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5023.600	53.79	-0.72	53.07	74.00	-20.93	peak
2	5023.600	39.85	-0.72	39.13	54.00	-14.87	AVG
3	5120.400	53.75	-0.53	53.22	74.00	-20.78	peak
4	5120.400	39.83	-0.53	39.30	54.00	-14.70	AVG
5	5150.000	52.40	-0.48	51.92	74.00	-22.08	peak
6	5172.100	90.16	-0.43	89.73	--	--	peak
7	5350.000	49.86	-0.08	49.78	74.00	-24.22	peak
8	5426.200	52.19	0.06	52.25	74.00	-21.75	peak
9	5426.200	38.76	0.06	38.82	54.00	-15.18	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

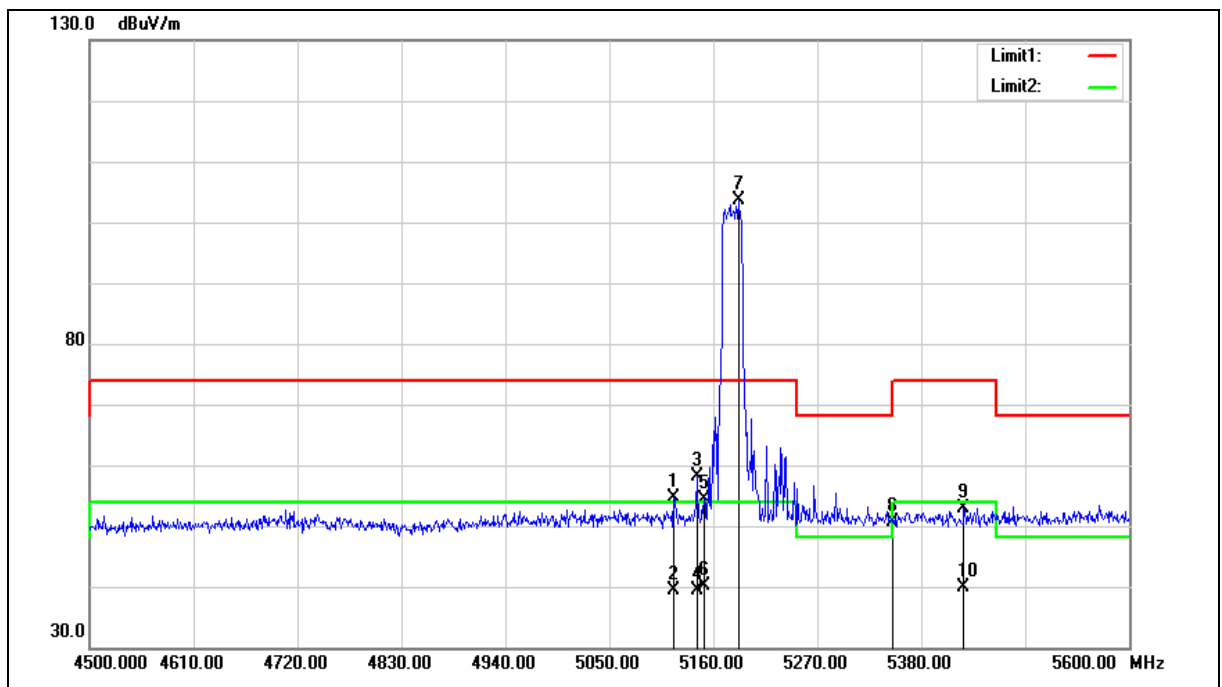

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5118.200	55.07	-0.54	54.53	74.00	-19.47	peak
2	5118.200	39.96	-0.54	39.42	54.00	-14.58	AVG
3	5142.400	58.54	-0.49	58.05	74.00	-15.95	peak
4	5142.400	39.94	-0.49	39.45	54.00	-14.55	AVG
5	5150.000	54.98	-0.48	54.50	74.00	-19.50	peak
6	5150.000	40.50	-0.48	40.02	54.00	-13.98	AVG
7	5186.400	104.10	-0.40	103.70	--	--	peak
8	5350.000	50.68	-0.08	50.60	74.00	-23.40	peak
9	5425.100	52.89	0.06	52.95	74.00	-21.05	peak
10	5425.100	39.80	0.06	39.86	54.00	-14.14	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

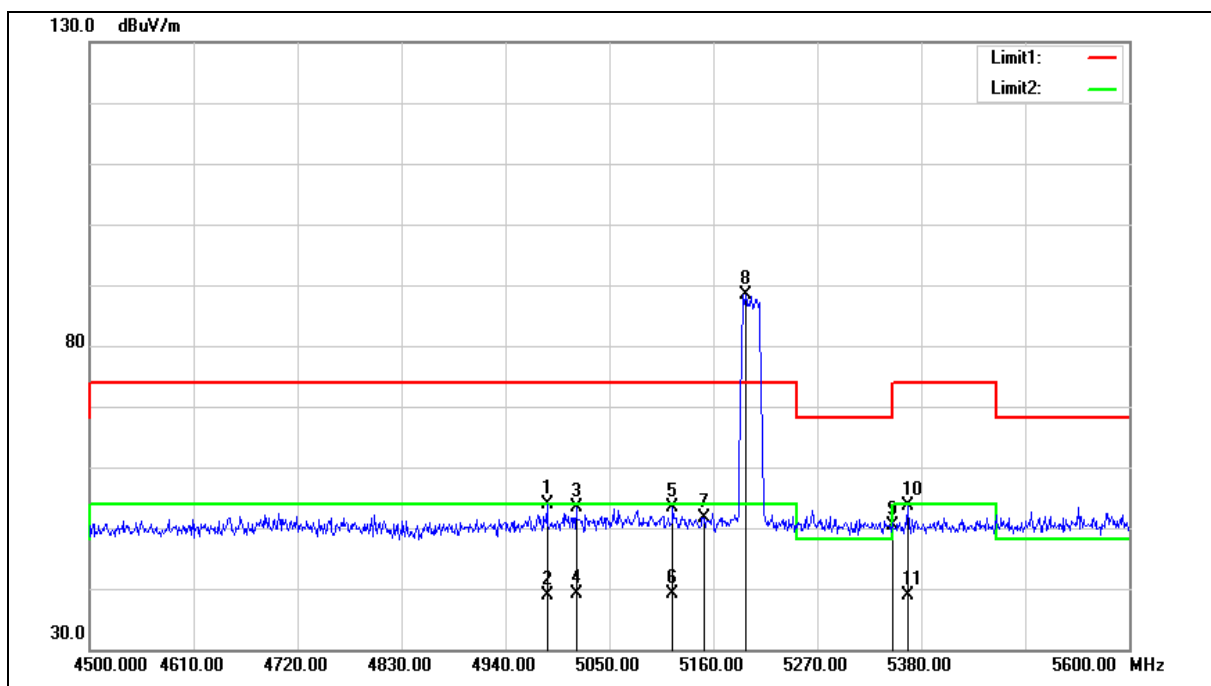

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4984.000	54.66	-0.82	53.84	74.00	-20.16	peak
2	4984.000	39.80	-0.82	38.98	54.00	-15.02	AVG
3	5014.800	54.02	-0.74	53.28	74.00	-20.72	peak
4	5014.800	39.85	-0.74	39.11	54.00	-14.89	AVG
5	5117.100	53.89	-0.54	53.35	74.00	-20.65	peak
6	5117.100	39.61	-0.54	39.07	54.00	-14.93	AVG
7	5150.000	52.23	-0.48	51.75	74.00	-22.25	peak
8	5194.100	88.77	-0.39	88.38	--	--	peak
9	5350.000	50.42	-0.08	50.34	74.00	-23.66	peak
10	5365.700	53.67	-0.05	53.62	74.00	-20.38	peak
11	5365.700	38.88	-0.05	38.83	54.00	-15.17	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

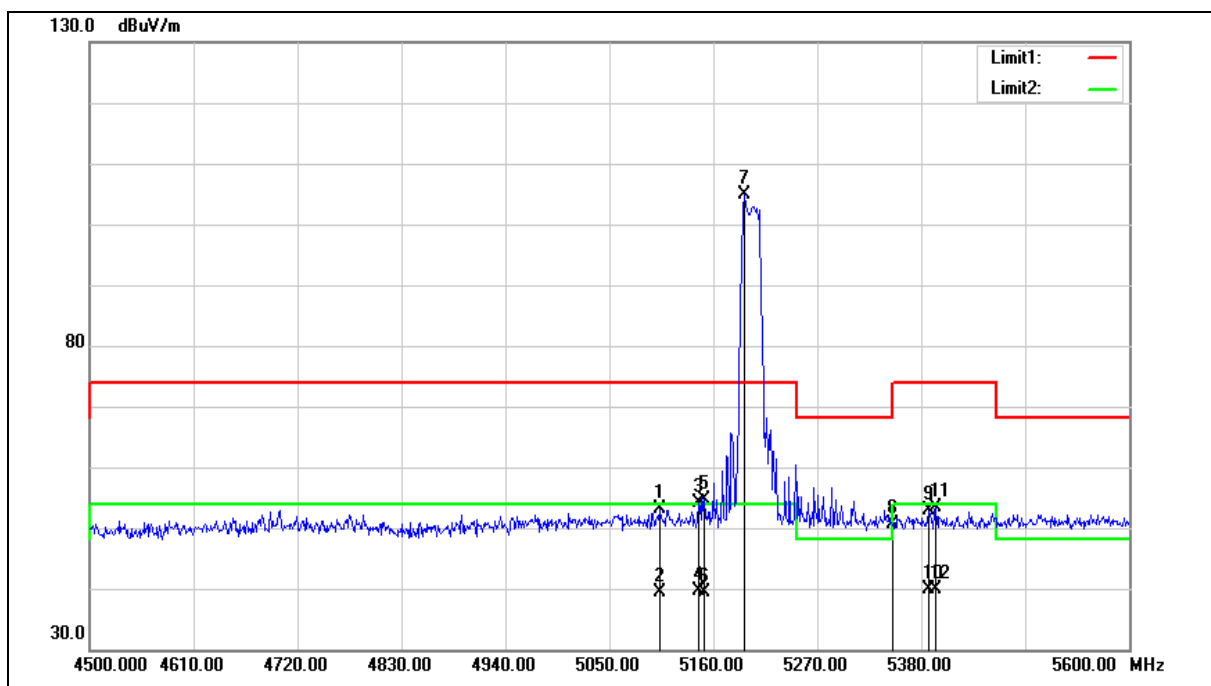

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5102.800	53.70	-0.57	53.13	74.00	-20.87	peak
2	5102.800	39.98	-0.57	39.41	54.00	-14.59	AVG
3	5144.600	54.50	-0.48	54.02	74.00	-19.98	peak
4	5144.600	40.04	-0.48	39.56	54.00	-14.44	AVG
5	5150.000	55.09	-0.48	54.61	74.00	-19.39	peak
6	5150.000	39.89	-0.48	39.41	54.00	-14.59	AVG
7	5193.000	105.20	-0.40	104.80	--	--	peak
8	5350.000	50.59	-0.08	50.51	74.00	-23.49	peak
9	5387.700	53.00	0.00	53.00	74.00	-21.00	peak
10	5387.700	39.88	0.00	39.88	54.00	-14.12	AVG
11	5395.400	53.29	0.01	53.30	74.00	-20.70	peak
12	5395.400	39.82	0.01	39.83	54.00	-14.17	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

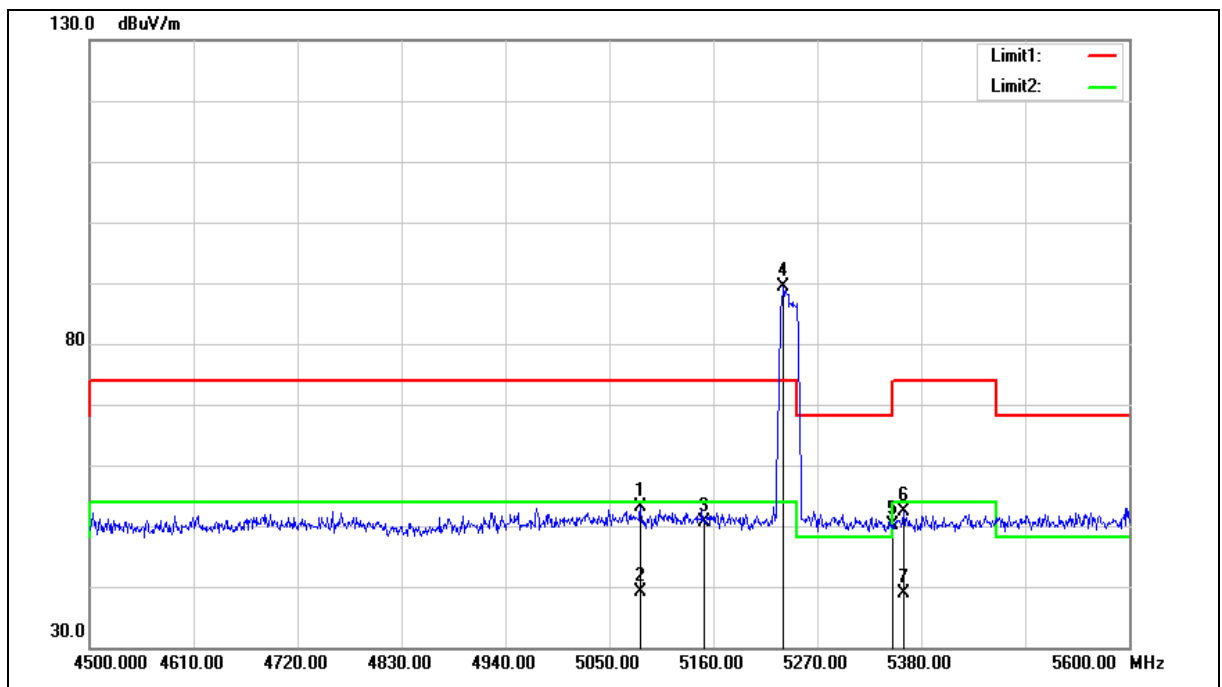

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5083.000	53.70	-0.60	53.10	74.00	-20.90	peak
2	5083.000	39.83	-0.60	39.23	54.00	-14.77	AVG
3	5150.000	51.10	-0.48	50.62	74.00	-23.38	peak
4	5233.700	89.65	-0.31	89.34	--	--	peak
5	5350.000	50.20	-0.08	50.12	74.00	-23.88	peak
6	5361.300	52.43	-0.06	52.37	74.00	-21.63	peak
7	5361.300	38.98	-0.06	38.92	54.00	-15.08	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

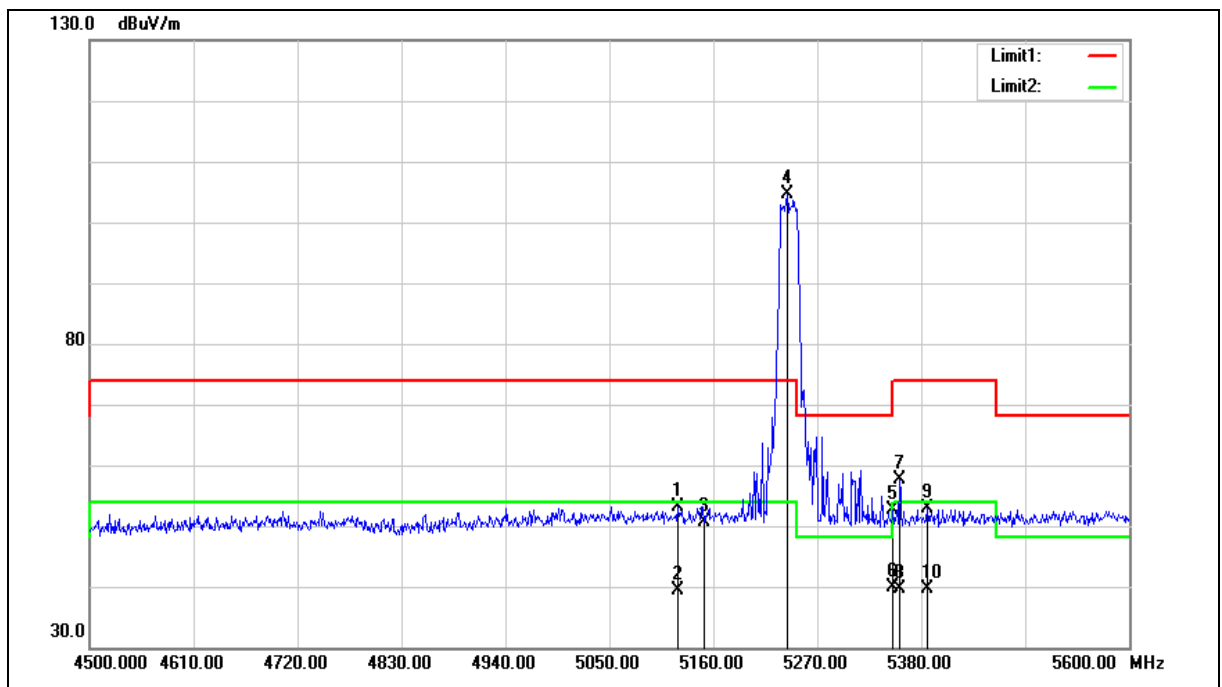

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5122.600	53.76	-0.53	53.23	74.00	-20.77	peak
2	5122.600	39.81	-0.53	39.28	54.00	-14.72	AVG
3	5150.000	51.01	-0.48	50.53	74.00	-23.47	peak
4	5238.100	104.98	-0.31	104.67	--	--	peak
5	5350.000	52.66	-0.08	52.58	74.00	-21.42	peak
6	5350.000	39.98	-0.08	39.90	54.00	-14.10	AVG
7	5356.900	57.58	-0.06	57.52	74.00	-16.48	peak
8	5356.900	39.57	-0.06	39.51	54.00	-14.49	AVG
9	5386.600	52.99	0.00	52.99	74.00	-21.01	peak
10	5386.600	39.66	0.00	39.66	54.00	-14.34	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

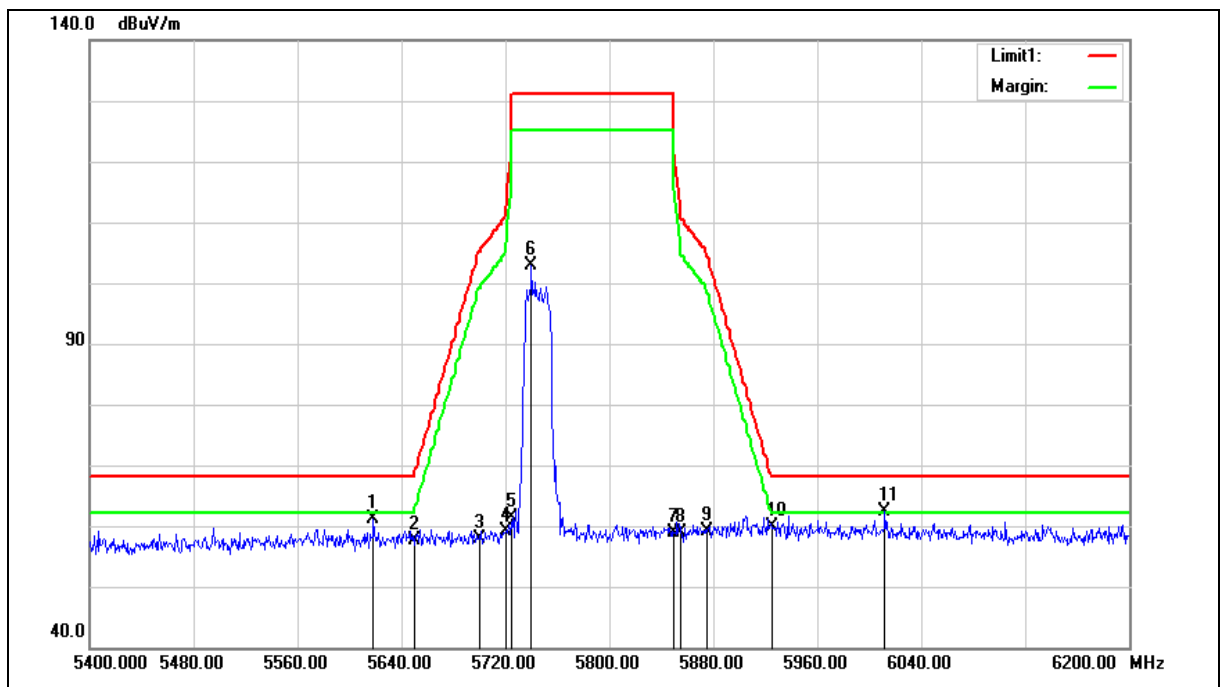

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5618.400	60.49	0.54	61.03	68.20	-7.17	peak
2	5650.000	57.11	0.62	57.73	68.20	-10.47	peak
3	5700.000	57.06	0.75	57.81	105.20	-47.39	peak
4	5720.000	58.38	0.81	59.19	110.80	-51.61	peak
5	5725.000	60.47	0.82	61.29	122.20	-60.91	peak
6	5740.000	101.90	0.86	102.76	--	--	peak
7	5850.000	57.70	1.17	58.87	122.20	-63.33	peak
8	5855.000	57.79	1.18	58.97	110.80	-51.83	peak
9	5875.000	57.93	1.23	59.16	105.20	-46.04	peak
10	5925.000	58.42	1.37	59.79	68.20	-8.41	peak
11	6012.000	60.68	1.62	62.30	68.20	-5.90	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

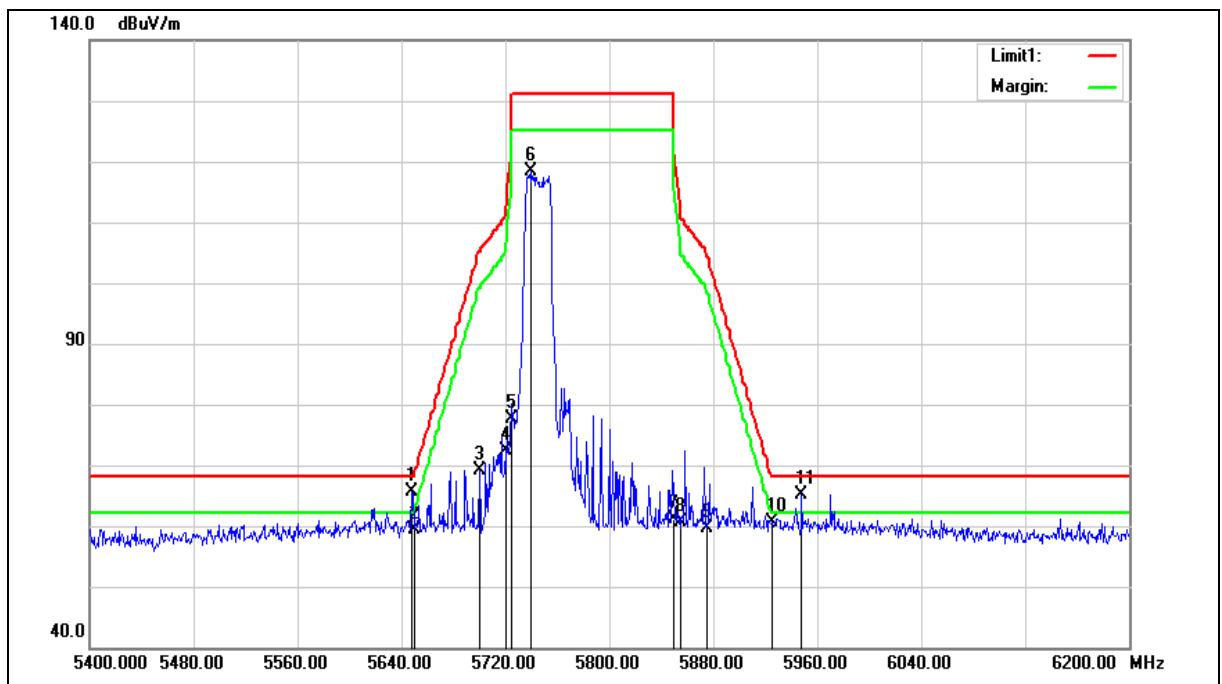

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5648.000	65.04	0.62	65.66	68.20	-2.54	peak
2	5650.000	58.64	0.62	59.26	68.20	-8.94	peak
3	5700.000	68.37	0.75	69.12	105.20	-36.08	peak
4	5720.000	71.48	0.81	72.29	110.80	-38.51	peak
5	5725.000	76.79	0.82	77.61	122.20	-44.59	peak
6	5740.000	117.55	0.86	118.41	--	--	peak
7	5850.000	60.06	1.17	61.23	122.20	-60.97	peak
8	5855.000	59.54	1.18	60.72	110.80	-50.08	peak
9	5875.000	58.34	1.23	59.57	105.20	-45.63	peak
10	5925.000	59.23	1.37	60.60	68.20	-7.60	peak
11	5948.000	63.67	1.43	65.10	68.20	-3.10	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

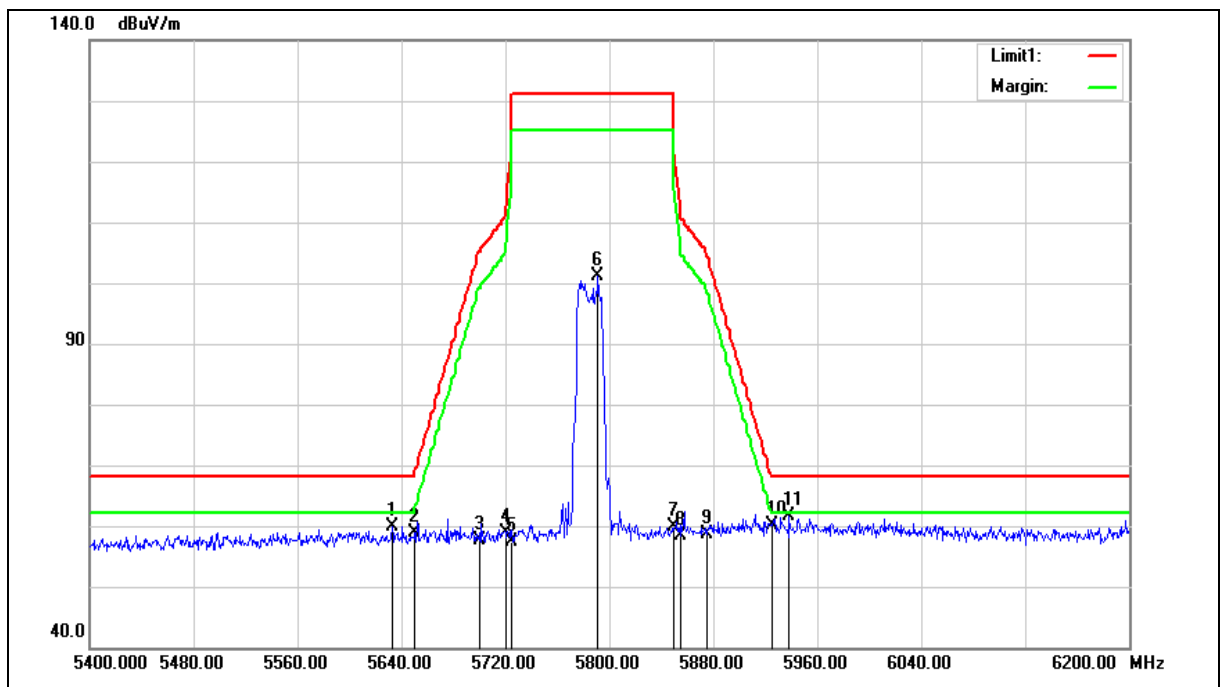

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.800	59.23	0.58	59.81	68.20	-8.39	peak
2	5650.000	58.23	0.62	58.85	68.20	-9.35	peak
3	5700.000	56.85	0.75	57.60	105.20	-47.60	peak
4	5720.000	58.12	0.81	58.93	110.80	-51.87	peak
5	5725.000	56.53	0.82	57.35	122.20	-64.85	peak
6	5791.200	100.12	1.01	101.13	--	--	peak
7	5850.000	58.60	1.17	59.77	122.20	-62.43	peak
8	5855.000	57.31	1.18	58.49	110.80	-52.31	peak
9	5875.000	57.52	1.23	58.75	105.20	-46.45	peak
10	5925.000	58.82	1.37	60.19	68.20	-8.01	peak
11	5938.400	60.24	1.40	61.64	68.20	-6.56	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

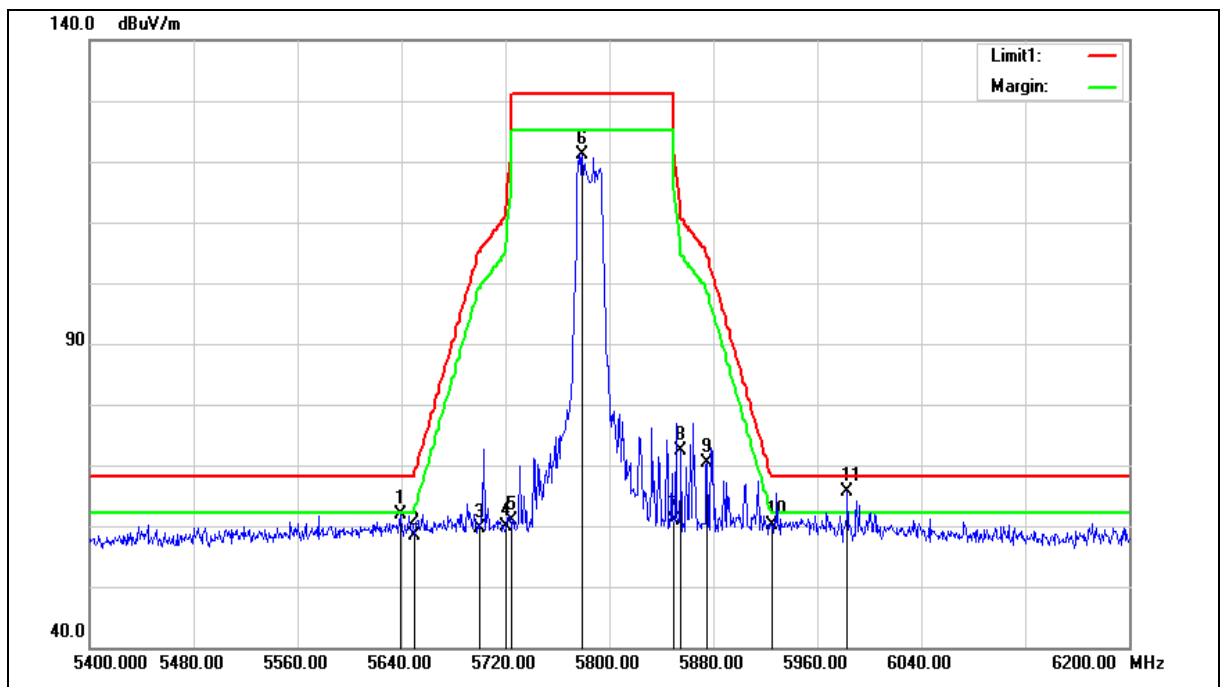

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5639.200	61.41	0.59	62.00	68.20	-6.20	peak
2	5650.000	57.79	0.62	58.41	68.20	-9.79	peak
3	5700.000	58.99	0.75	59.74	105.20	-45.46	peak
4	5720.000	59.03	0.81	59.84	110.80	-50.96	peak
5	5725.000	59.98	0.82	60.80	122.20	-61.40	peak
6	5779.200	120.20	0.98	121.18	--	--	peak
7	5850.000	59.80	1.17	60.97	122.20	-61.23	peak
8	5855.000	71.30	1.18	72.48	110.80	-38.32	peak
9	5875.000	69.24	1.23	70.47	105.20	-34.73	peak
10	5925.000	58.64	1.37	60.01	68.20	-8.19	peak
11	5983.200	63.99	1.52	65.51	68.20	-2.69	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

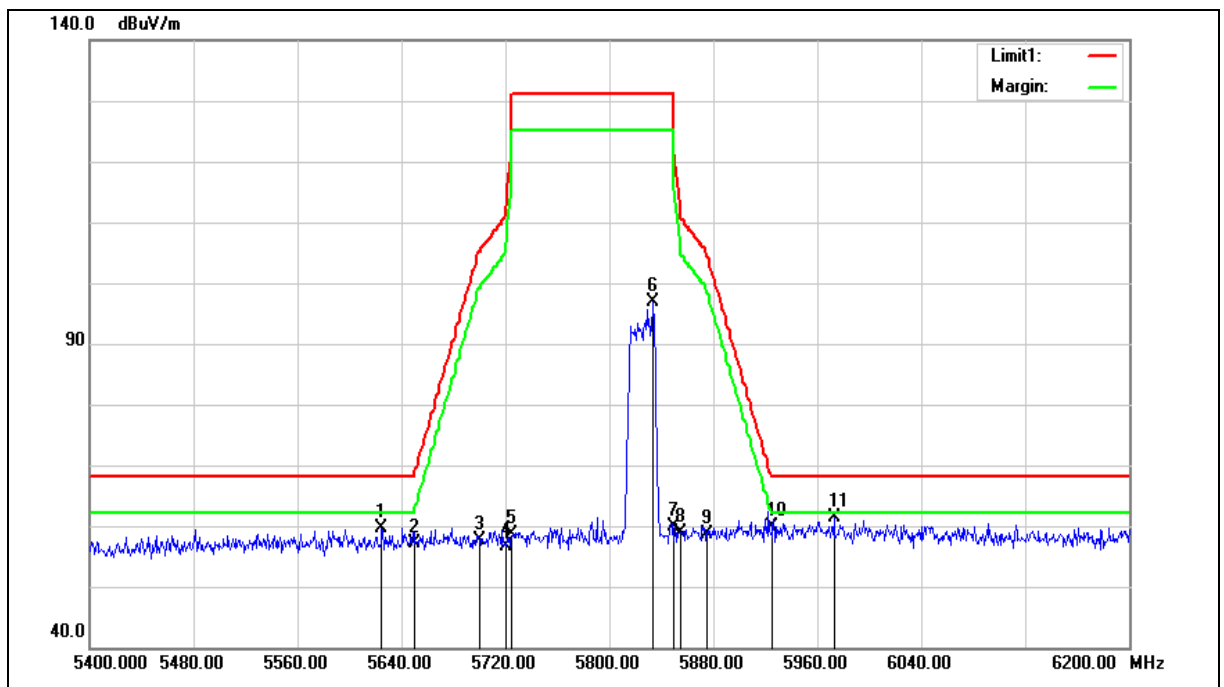

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5624.800	59.07	0.55	59.62	68.20	-8.58	peak
2	5650.000	56.40	0.62	57.02	68.20	-11.18	peak
3	5700.000	56.76	0.75	57.51	105.20	-47.69	peak
4	5720.000	55.77	0.81	56.58	110.80	-54.22	peak
5	5725.000	57.74	0.82	58.56	122.20	-63.64	peak
6	5833.600	95.85	1.12	96.97	--	--	peak
7	5850.000	58.62	1.17	59.79	122.20	-62.41	peak
8	5855.000	57.72	1.18	58.90	110.80	-51.90	peak
9	5875.000	57.37	1.23	58.60	105.20	-46.60	peak
10	5925.000	58.52	1.37	59.89	68.20	-8.31	peak
11	5972.800	59.88	1.50	61.38	68.20	-6.82	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

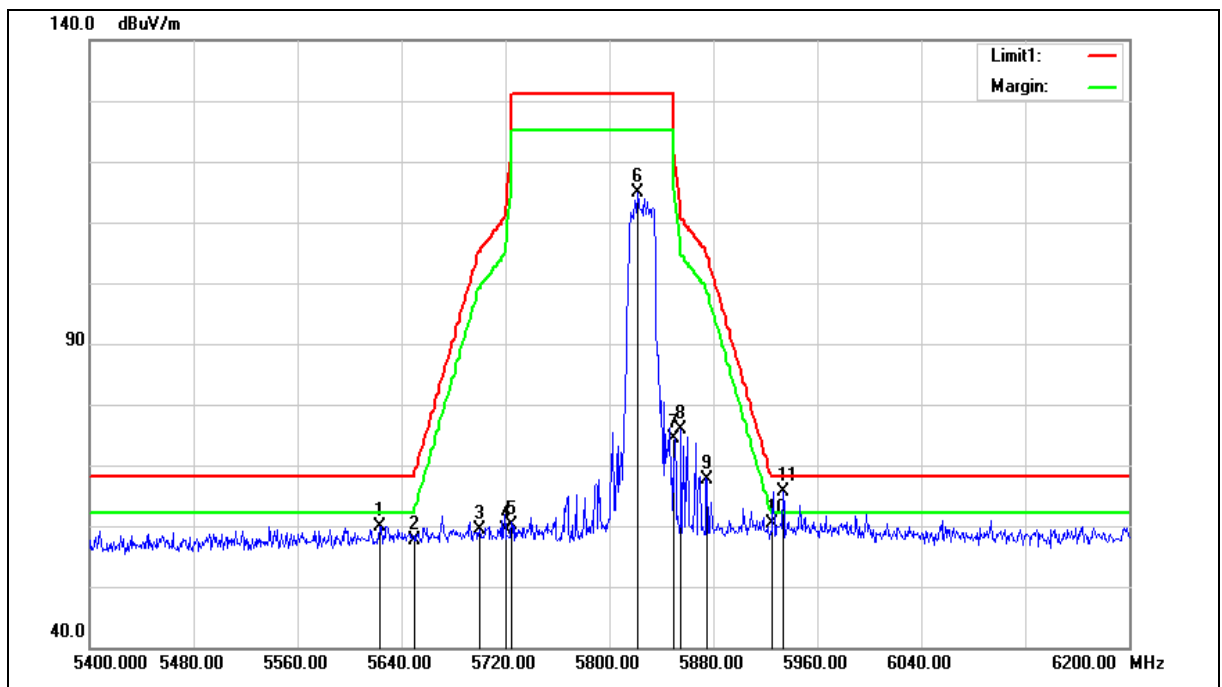

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5623.200	59.35	0.55	59.90	68.20	-8.30	peak
2	5650.000	57.01	0.62	57.63	68.20	-10.57	peak
3	5700.000	58.71	0.75	59.46	105.20	-45.74	peak
4	5720.000	58.49	0.81	59.30	110.80	-51.50	peak
5	5725.000	59.31	0.82	60.13	122.20	-62.07	peak
6	5821.600	113.69	1.09	114.78	--	--	peak
7	5850.000	73.20	1.17	74.37	122.20	-47.83	peak
8	5855.000	74.59	1.18	75.77	110.80	-35.03	peak
9	5875.000	66.29	1.23	67.52	105.20	-37.68	peak
10	5925.000	58.98	1.37	60.35	68.20	-7.85	peak
11	5933.600	64.26	1.38	65.64	68.20	-2.56	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

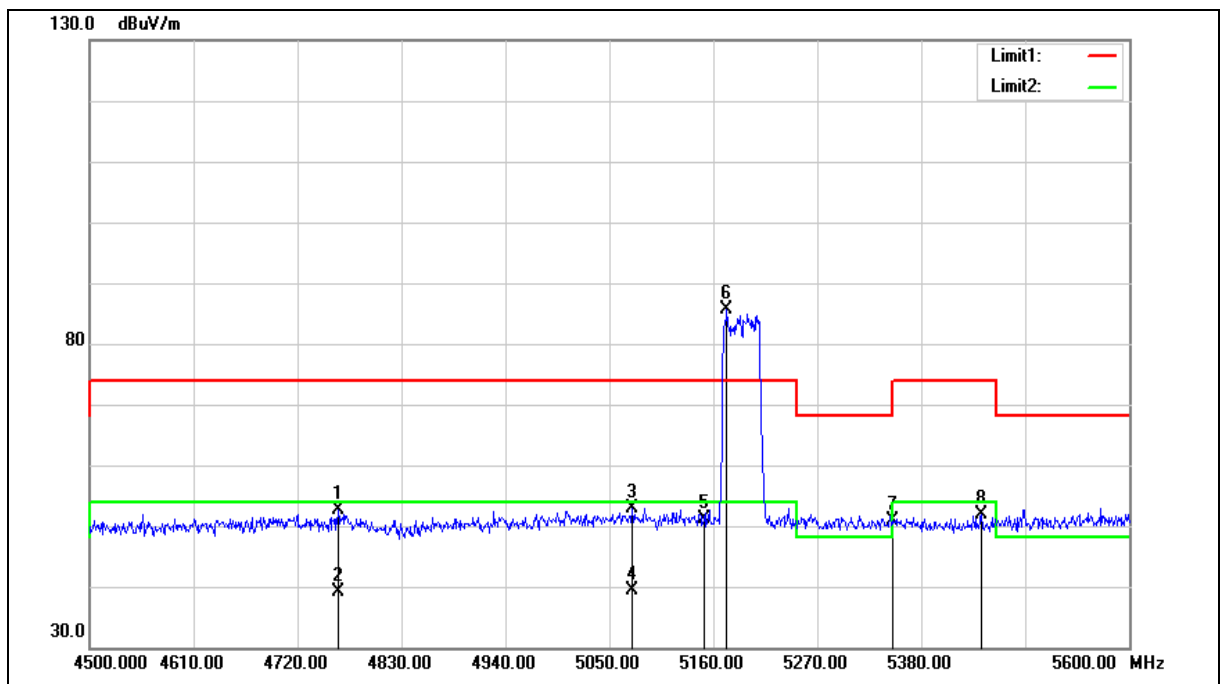

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4762.900	54.07	-1.42	52.65	74.00	-21.35	peak
2	4762.900	40.44	-1.42	39.02	54.00	-14.98	AVG
3	5074.200	53.44	-0.62	52.82	74.00	-21.18	peak
4	5074.200	39.95	-0.62	39.33	54.00	-14.67	AVG
5	5150.000	51.56	-0.48	51.08	74.00	-22.92	peak
6	5174.300	86.02	-0.43	85.59	--	--	peak
7	5350.000	50.85	-0.08	50.77	74.00	-23.23	peak
8	5443.800	51.89	0.11	52.00	74.00	-22.00	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

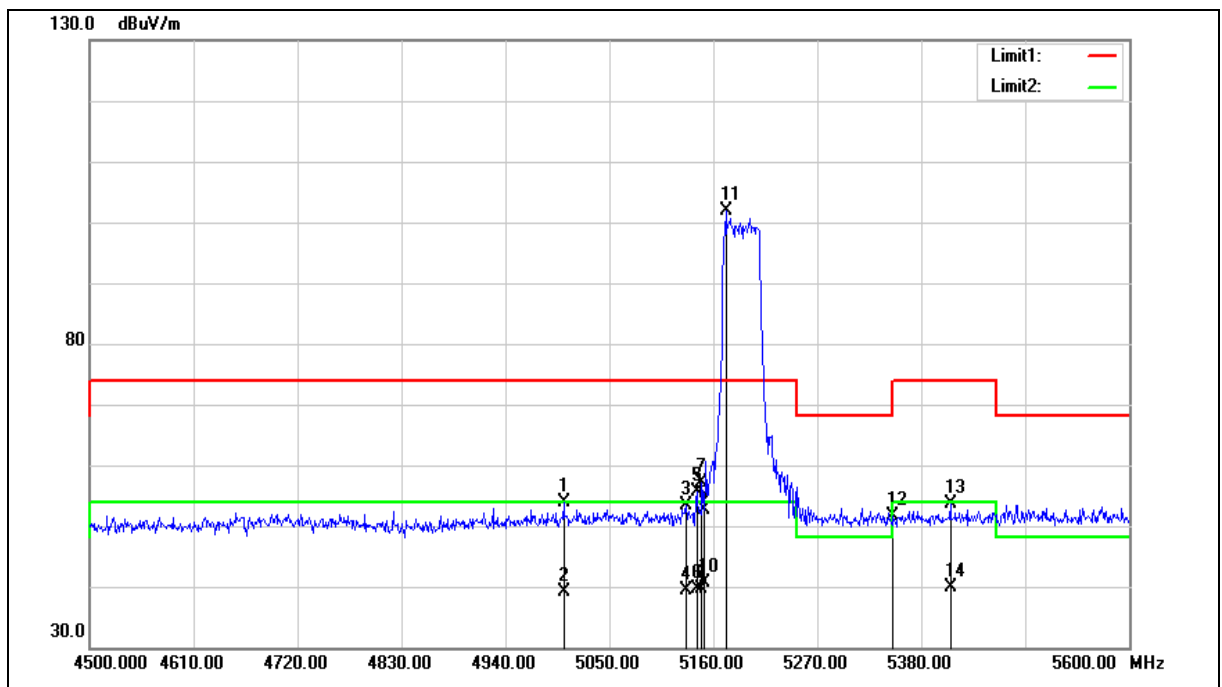

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5001.600	54.71	-0.77	53.94	74.00	-20.06	peak
2	5001.600	39.96	-0.77	39.19	54.00	-14.81	AVG
3	5131.400	53.82	-0.51	53.31	74.00	-20.69	peak
4	5131.400	39.92	-0.51	39.41	54.00	-14.59	AVG
5	5142.400	56.23	-0.49	55.74	74.00	-18.26	peak
6	5142.400	40.24	-0.49	39.75	54.00	-14.25	AVG
7	5147.900	57.67	-0.48	57.19	74.00	-16.81	peak
8	5147.900	40.23	-0.48	39.75	54.00	-14.25	AVG
9	5150.000	53.19	-0.48	52.71	74.00	-21.29	peak
10	5150.000	40.99	-0.48	40.51	54.00	-13.49	AVG
11	5173.200	102.27	-0.43	101.84	--	--	peak
12	5350.000	51.64	-0.08	51.56	74.00	-22.44	peak
13	5410.800	53.67	0.04	53.71	74.00	-20.29	peak
14	5410.800	39.73	0.04	39.77	54.00	-14.23	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

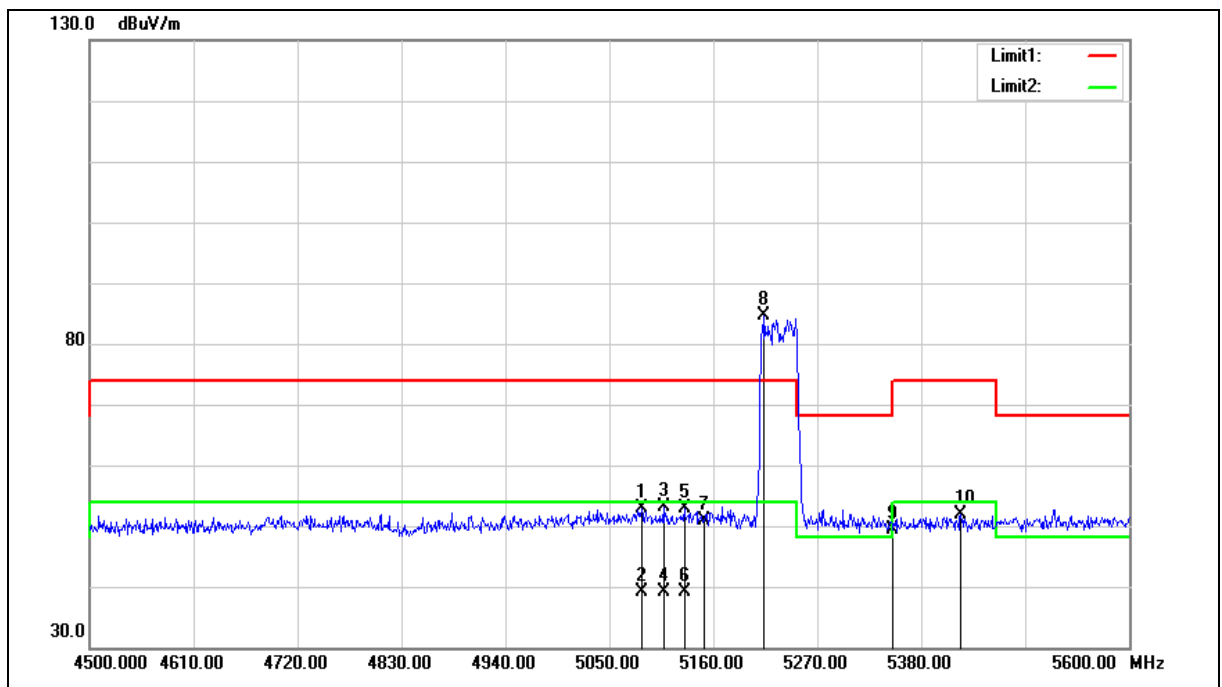

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5084.100	53.43	-0.60	52.83	74.00	-21.17	peak
2	5084.100	39.83	-0.60	39.23	54.00	-14.77	AVG
3	5107.200	53.58	-0.56	53.02	74.00	-20.98	peak
4	5107.200	39.67	-0.56	39.11	54.00	-14.89	AVG
5	5129.200	53.41	-0.52	52.89	74.00	-21.11	peak
6	5129.200	39.66	-0.52	39.14	54.00	-14.86	AVG
7	5150.000	51.34	-0.48	50.86	74.00	-23.14	peak
8	5213.900	85.06	-0.35	84.71	--	--	peak
9	5350.000	49.42	-0.08	49.34	74.00	-24.66	peak
10	5421.800	51.71	0.06	51.77	74.00	-22.23	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

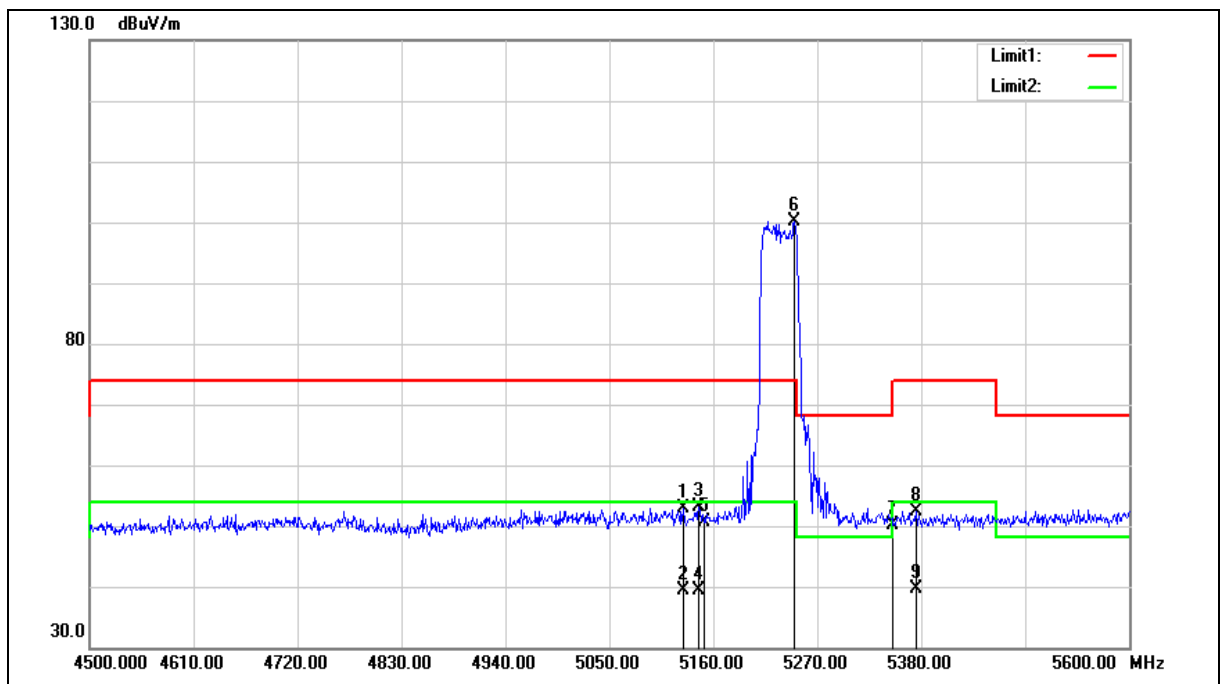

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5128.100	53.48	-0.52	52.96	74.00	-21.04	peak
2	5128.100	39.85	-0.52	39.33	54.00	-14.67	AVG
3	5144.600	53.50	-0.48	53.02	74.00	-20.98	peak
4	5144.600	39.97	-0.48	39.49	54.00	-14.51	AVG
5	5150.000	51.19	-0.48	50.71	74.00	-23.29	peak
6	5245.800	100.49	-0.28	100.21	--	--	peak
7	5350.000	50.12	-0.08	50.04	74.00	-23.96	peak
8	5374.500	52.32	-0.03	52.29	74.00	-21.71	peak
9	5374.500	39.60	-0.03	39.57	54.00	-14.43	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

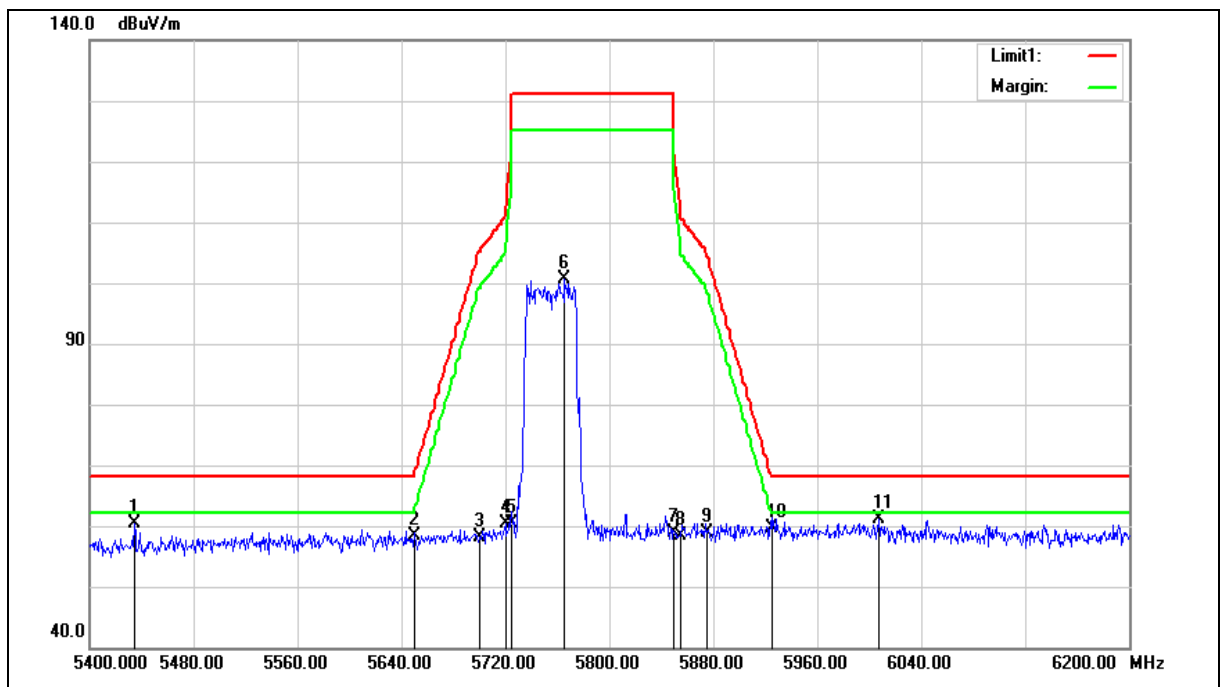

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5434.400	60.18	0.09	60.27	68.20	-7.93	peak
2	5650.000	57.68	0.62	58.30	68.20	-9.90	peak
3	5700.000	57.47	0.75	58.22	105.20	-46.98	peak
4	5720.000	59.47	0.81	60.28	110.80	-50.52	peak
5	5725.000	59.66	0.82	60.48	122.20	-61.72	peak
6	5765.600	99.74	0.93	100.67	--	--	peak
7	5850.000	57.65	1.17	58.82	122.20	-63.38	peak
8	5855.000	57.15	1.18	58.33	110.80	-52.47	peak
9	5875.000	57.62	1.23	58.85	105.20	-46.35	peak
10	5925.000	58.18	1.37	59.55	68.20	-8.65	peak
11	6007.200	59.43	1.59	61.02	68.20	-7.18	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

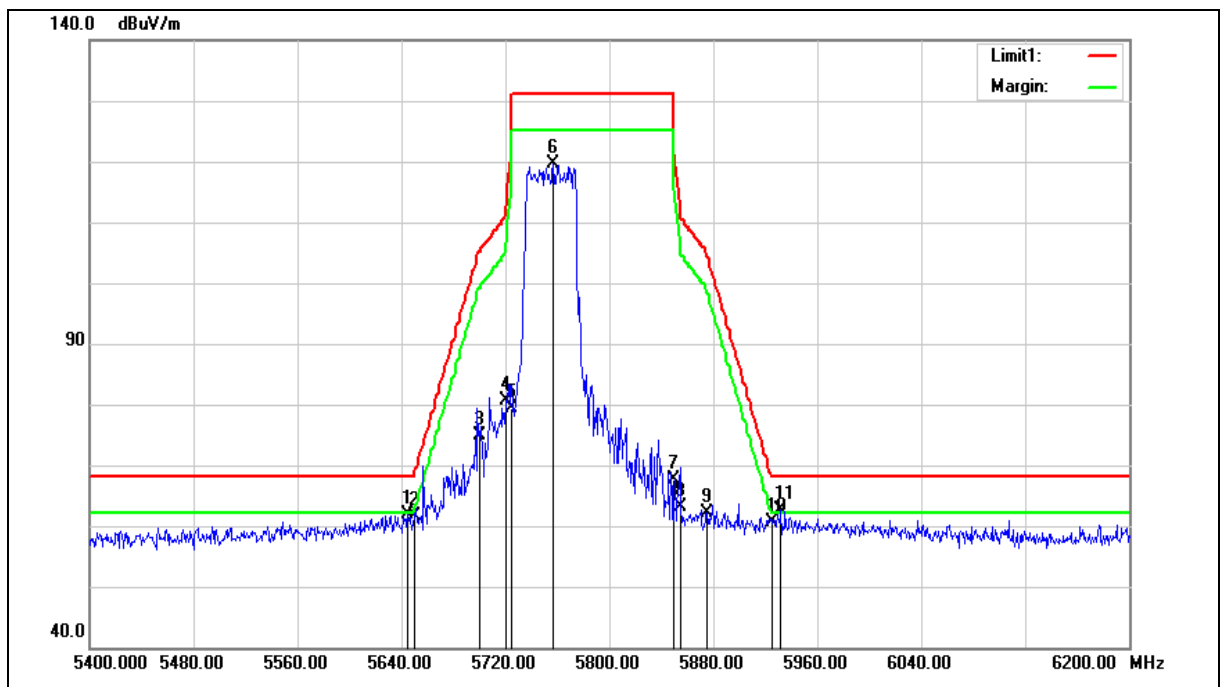

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	61.27	0.60	61.87	68.20	-6.33	peak
2	5650.000	61.09	0.62	61.71	68.20	-6.49	peak
3	5700.000	74.06	0.75	74.81	105.20	-30.39	peak
4	5720.000	79.89	0.81	80.70	110.80	-30.10	peak
5	5725.000	78.62	0.82	79.44	122.20	-42.76	peak
6	5756.800	118.62	0.91	119.53	--	--	peak
7	5850.000	66.46	1.17	67.63	122.20	-54.57	peak
8	5855.000	61.95	1.18	63.13	110.80	-47.67	peak
9	5875.000	60.93	1.23	62.16	105.20	-43.04	peak
10	5925.000	59.28	1.37	60.65	68.20	-7.55	peak
11	5932.000	61.31	1.38	62.69	68.20	-5.51	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

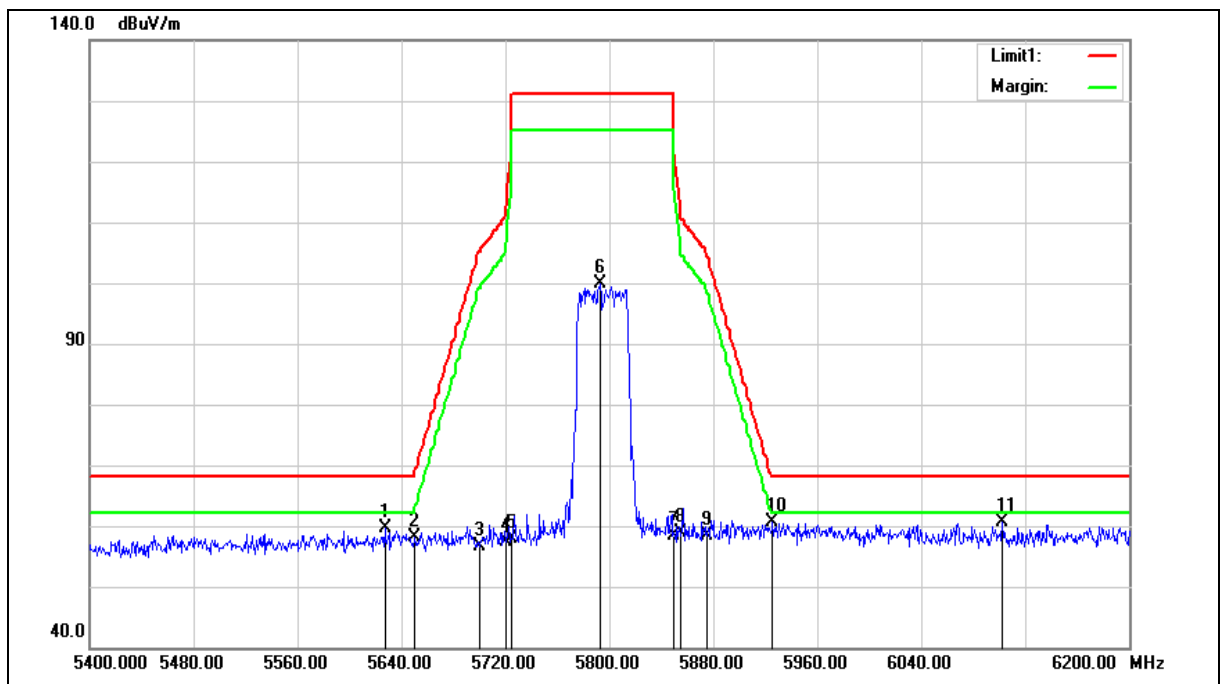

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5627.200	59.12	0.55	59.67	68.20	-8.53	peak
2	5650.000	57.45	0.62	58.07	68.20	-10.13	peak
3	5700.000	55.95	0.75	56.70	105.20	-48.50	peak
4	5720.000	56.62	0.81	57.43	110.80	-53.37	peak
5	5725.000	57.05	0.82	57.87	122.20	-64.33	peak
6	5792.800	98.83	1.01	99.84	--	--	peak
7	5850.000	57.29	1.17	58.46	122.20	-63.74	peak
8	5855.000	57.65	1.18	58.83	110.80	-51.97	peak
9	5875.000	57.14	1.23	58.37	105.20	-46.83	peak
10	5925.000	59.27	1.37	60.64	68.20	-7.56	peak
11	6102.400	58.75	1.94	60.69	68.20	-7.51	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

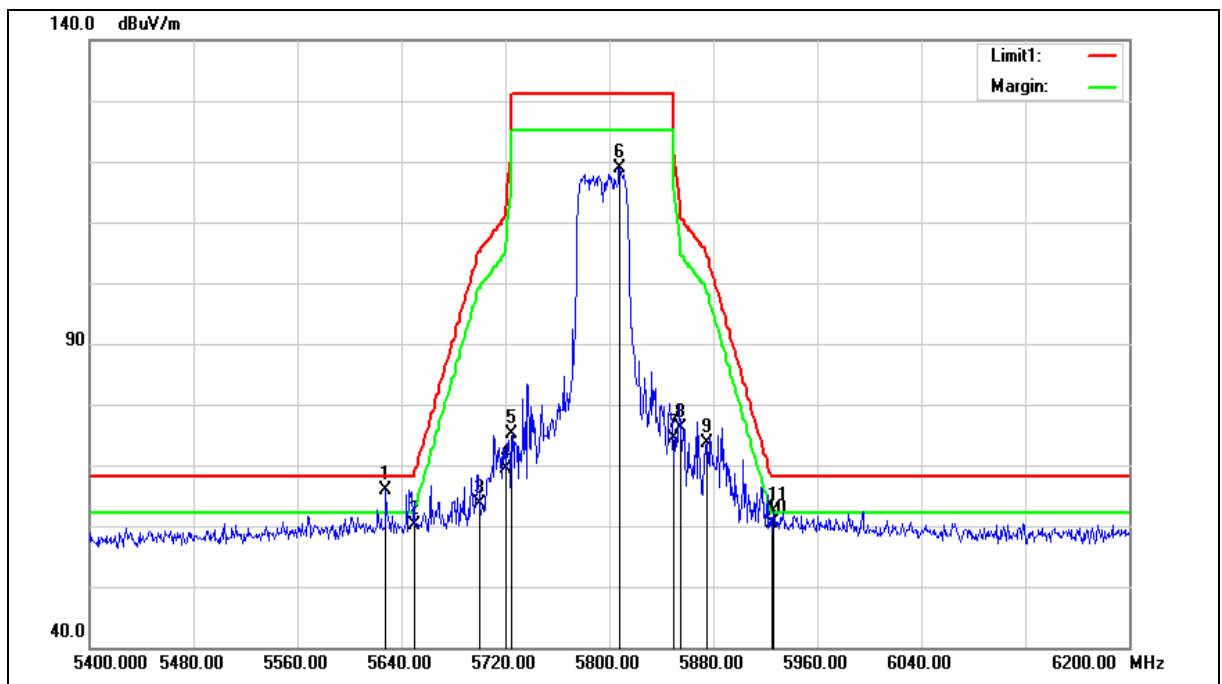

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5628.000	65.40	0.55	65.95	68.20	-2.25	peak
2	5650.000	59.42	0.62	60.04	68.20	-8.16	peak
3	5700.000	62.89	0.75	63.64	105.20	-41.56	peak
4	5720.000	68.59	0.81	69.40	110.80	-41.40	peak
5	5725.000	74.24	0.82	75.06	122.20	-47.14	peak
6	5808.000	117.79	1.05	118.84	--	--	peak
7	5850.000	73.23	1.17	74.40	122.20	-47.80	peak
8	5855.000	74.92	1.18	76.10	110.80	-34.70	peak
9	5875.000	72.29	1.23	73.52	105.20	-31.68	peak
10	5925.000	59.10	1.37	60.47	68.20	-7.73	peak
11	5926.400	60.99	1.37	62.36	68.20	-5.84	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

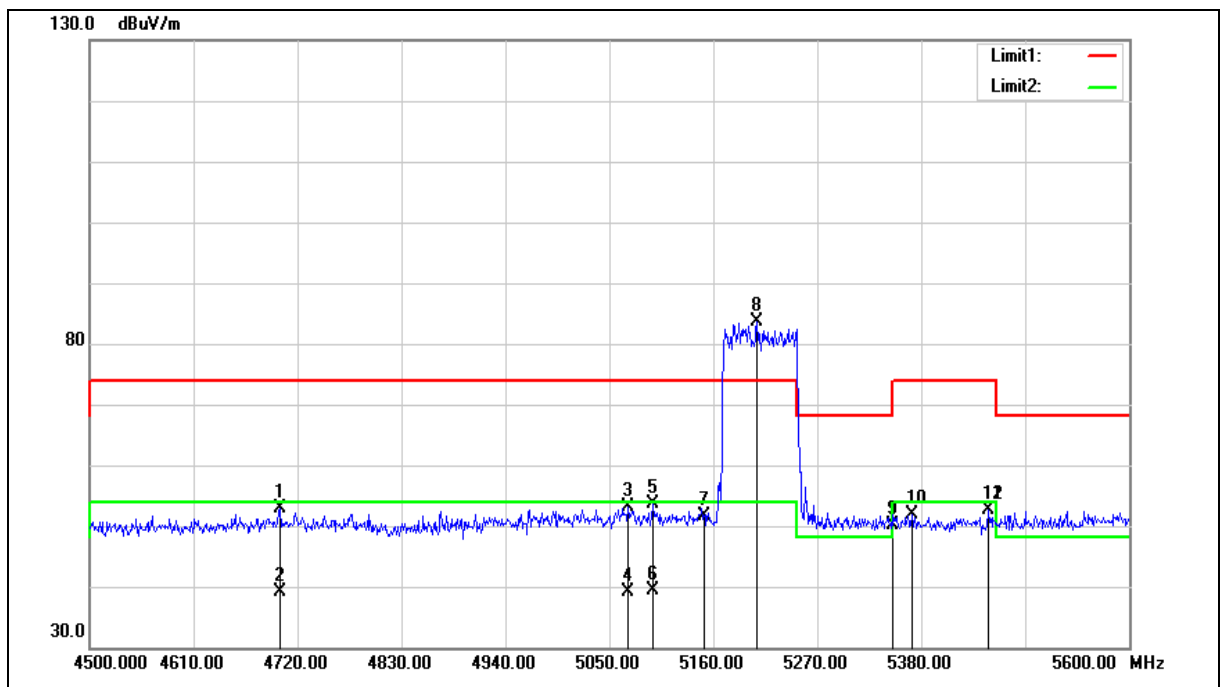

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4701.300	54.58	-1.59	52.99	74.00	-21.01	peak
2	4701.300	40.64	-1.59	39.05	54.00	-14.95	AVG
3	5069.800	53.76	-0.63	53.13	74.00	-20.87	peak
4	5069.800	39.86	-0.63	39.23	54.00	-14.77	AVG
5	5096.200	54.29	-0.57	53.72	74.00	-20.28	peak
6	5096.200	39.86	-0.57	39.29	54.00	-14.71	AVG
7	5150.000	52.09	-0.48	51.61	74.00	-22.39	peak
8	5206.200	83.93	-0.37	83.56	--	--	peak
9	5350.000	50.17	-0.08	50.09	74.00	-23.91	peak
10	5370.100	51.89	-0.03	51.86	74.00	-22.14	peak
11	5451.500	52.43	0.12	52.55	74.00	-21.45	peak
12	5451.500	52.43	0.12	52.55	54.00	-1.45	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

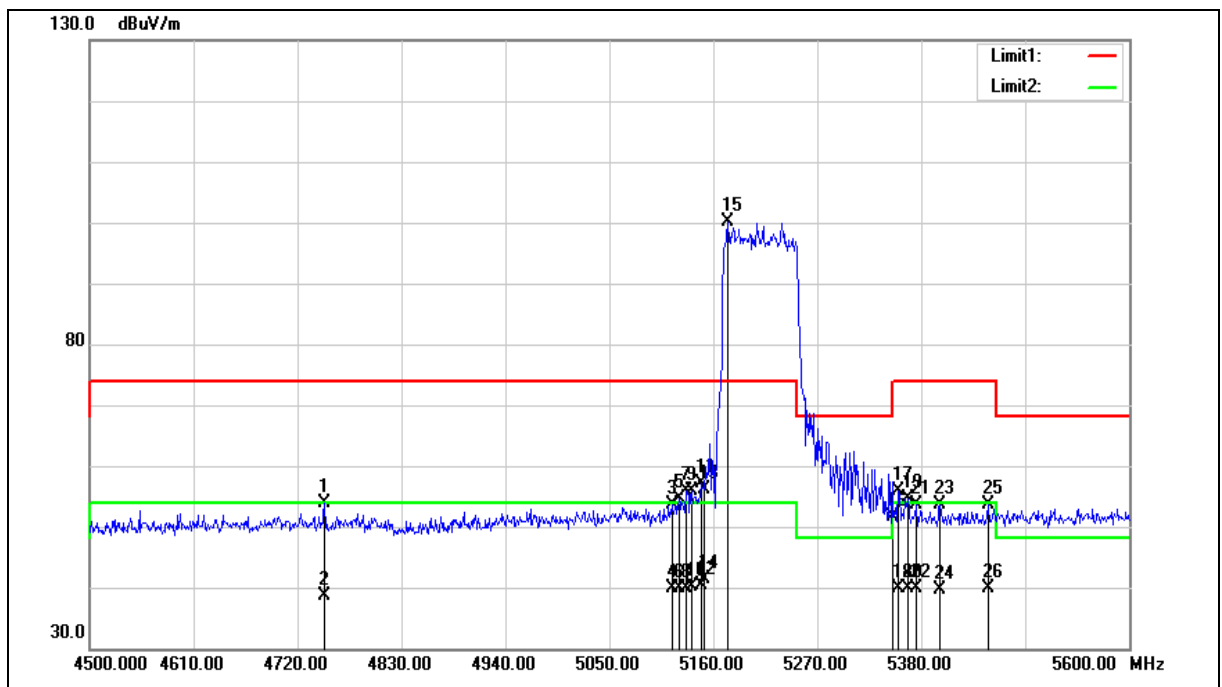

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4748.600	55.42	-1.46	53.96	74.00	-20.04	peak
2	4748.600	40.10	-1.46	38.64	54.00	-15.36	AVG
3	5116.000	54.24	-0.54	53.70	74.00	-20.30	peak
4	5116.000	40.37	-0.54	39.83	54.00	-14.17	AVG
5	5123.700	55.08	-0.52	54.56	74.00	-19.44	peak
6	5123.700	40.31	-0.52	39.79	54.00	-14.21	AVG
7	5131.400	56.31	-0.51	55.80	74.00	-18.20	peak
8	5131.400	40.39	-0.51	39.88	54.00	-14.12	AVG
9	5136.900	56.44	-0.50	55.94	74.00	-18.06	peak
10	5136.900	40.62	-0.50	40.12	54.00	-13.88	AVG
11	5146.800	57.71	-0.48	57.23	74.00	-16.77	peak
12	5146.800	40.87	-0.48	40.39	54.00	-13.61	AVG
13	5150.000	56.49	-0.48	56.01	74.00	-17.99	peak
14	5150.000	41.74	-0.48	41.26	54.00	-12.74	AVG
15	5175.400	100.55	-0.43	100.12	--	--	peak
16	5350.000	51.70	-0.08	51.62	74.00	-22.38	peak
17	5355.800	55.85	-0.07	55.78	74.00	-18.22	peak
18	5355.800	39.90	-0.07	39.83	54.00	-14.17	AVG
19	5365.700	54.72	-0.05	54.67	74.00	-19.33	peak
20	5365.700	39.85	-0.05	39.80	54.00	-14.20	AVG
21	5374.500	53.73	-0.03	53.70	74.00	-20.30	peak
22	5374.500	39.87	-0.03	39.84	54.00	-14.16	AVG
23	5399.800	53.49	0.02	53.51	74.00	-20.49	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5399.800	39.71	0.02	39.73	54.00	-14.27	AVG
25	5450.400	53.40	0.12	53.52	74.00	-20.48	peak
26	5450.400	39.69	0.12	39.81	54.00	-14.19	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

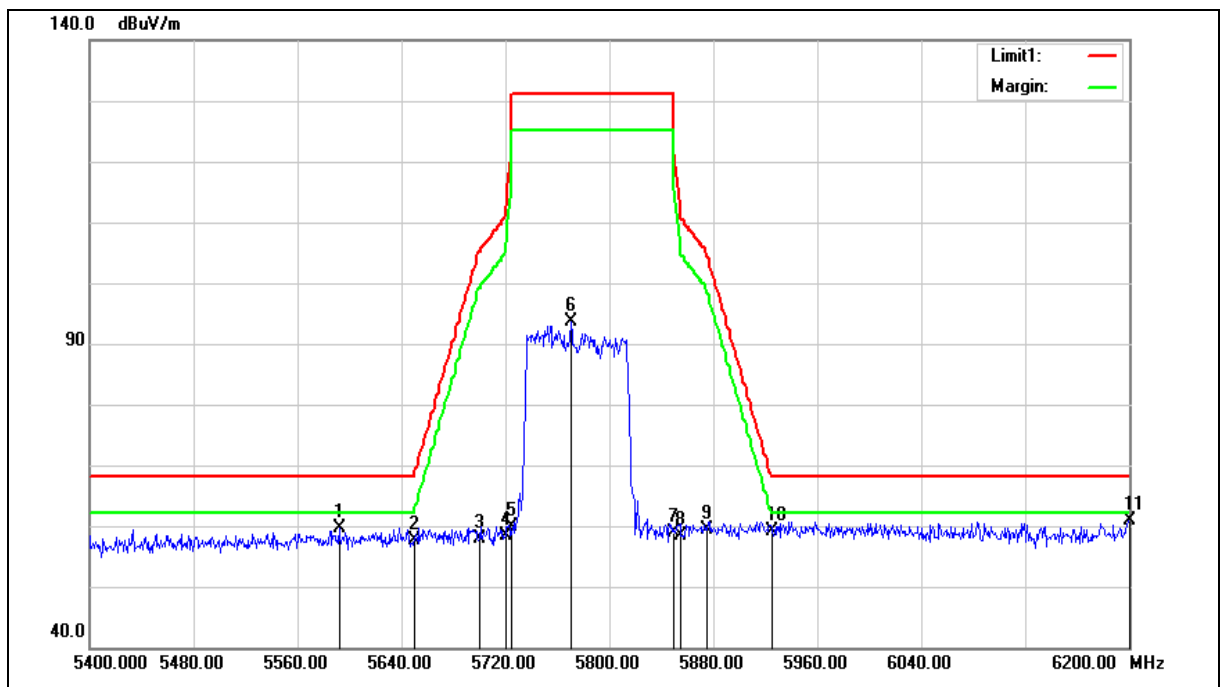

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5592.000	59.21	0.47	59.68	68.20	-8.52	peak
2	5650.000	57.10	0.62	57.72	68.20	-10.48	peak
3	5700.000	57.17	0.75	57.92	105.20	-47.28	peak
4	5720.000	57.48	0.81	58.29	110.80	-52.51	peak
5	5725.000	59.05	0.82	59.87	122.20	-62.33	peak
6	5770.400	92.65	0.94	93.59	--	--	peak
7	5850.000	57.72	1.17	58.89	122.20	-63.31	peak
8	5855.000	57.27	1.18	58.45	110.80	-52.35	peak
9	5875.000	58.12	1.23	59.35	105.20	-45.85	peak
10	5925.000	57.85	1.37	59.22	68.20	-8.98	peak
11	6200.000	58.72	2.28	61.00	68.20	-7.20	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.--

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

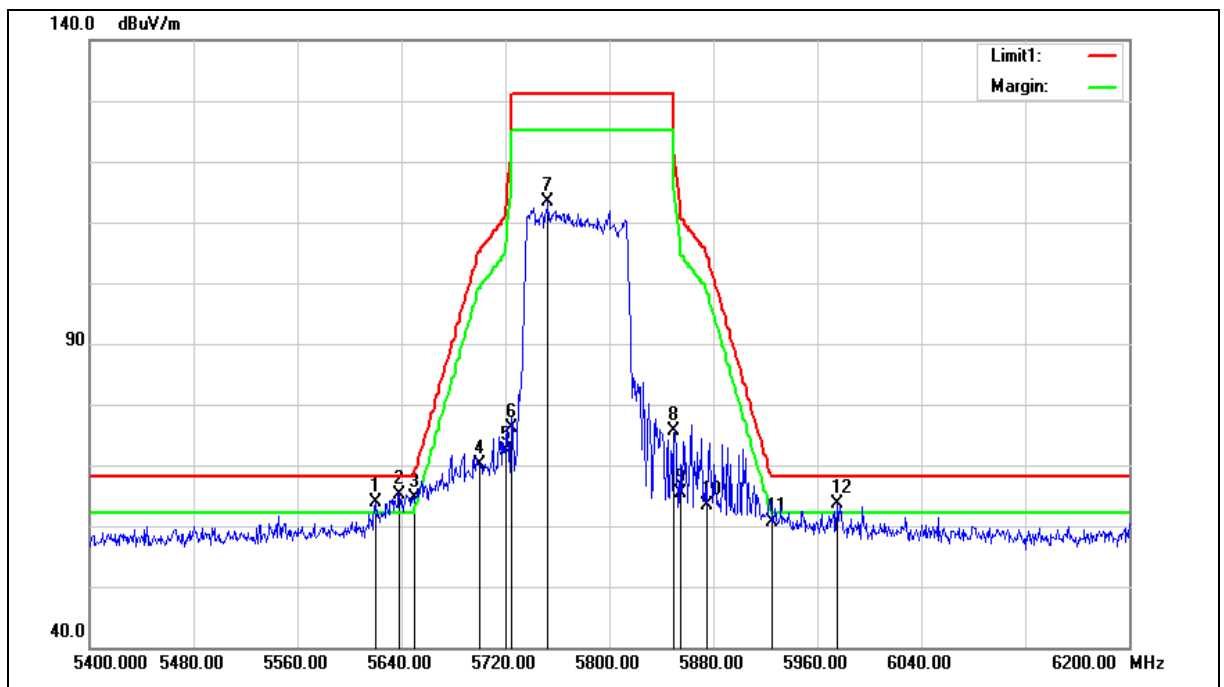

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5620.000	63.43	0.54	63.97	68.20	-4.23	peak
2	5638.400	64.66	0.59	65.25	68.20	-2.95	peak
3	5650.000	63.93	0.62	64.55	68.20	-3.65	peak
4	5700.000	69.27	0.75	70.02	105.20	-35.18	peak
5	5720.000	71.49	0.81	72.30	110.80	-38.50	peak
6	5725.000	75.29	0.82	76.11	122.20	-46.09	peak
7	5752.800	112.47	0.90	113.37	--	--	peak
8	5850.000	74.56	1.17	75.73	122.20	-46.47	peak
9	5855.000	64.20	1.18	65.38	110.80	-45.42	peak
10	5875.000	62.27	1.23	63.50	105.20	-41.70	peak
11	5925.000	59.20	1.37	60.57	68.20	-7.63	peak
12	5975.200	62.19	1.50	63.69	68.20	-4.51	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.--

Annex E. Conducted Test Results (5 GHz)

Maximum Conducted Output Power

操作 模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)											Limit (dBm)
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3			
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W		
Mode 10	6	36	5180.0	13.72	0.024	---	---	---	---	---	---	---	---	≤ 29.00	
		40	5200.0	13.68	0.023	---	---	---	---	---	---	---	---	≤ 29.00	
		44	5220.0	13.63	0.023	---	---	---	---	---	---	---	---	≤ 29.00	
		48	5240.0	13.66	0.023	---	---	---	---	---	---	---	---	≤ 29.00	
		149	5745.0	19.67	0.093	---	---	---	---	---	---	---	---	≤ 29.00	
		153	5765.0	19.61	0.091	---	---	---	---	---	---	---	---	≤ 29.00	
		157	5785.0	19.72	0.094	---	---	---	---	---	---	---	---	≤ 29.00	
		161	5805.0	19.56	0.090	---	---	---	---	---	---	---	---	≤ 29.00	
165	5825.0	21.28	0.134	---	---	---	---	---	---	---	---	---	≤ 29.00		
Mode 11	28.8	36	5180.0	1.23	0.001	0.43	0.001	0.87	0.001	0.86	0.001	6.88	0.005	≤ 22.98	
		40	5200.0	1.18	0.001	1.21	0.001	1.31	0.001	0.72	0.001	7.13	0.005	≤ 22.98	
		44	5220.0	1.15	0.001	1.19	0.001	1.24	0.001	0.68	0.001	7.09	0.005	≤ 22.98	
		48	5240.0	0.13	0.001	1.06	0.001	1.25	0.001	1.31	0.001	6.98	0.005	≤ 22.98	
		149	5745.0	15.98	0.040	15.64	0.037	16.09	0.041	16.13	0.041	21.98	0.158	≤ 22.98	
		153	5765.0	15.86	0.039	15.48	0.035	15.97	0.040	16.19	0.042	21.90	0.155	≤ 22.98	
		157	5785.0	15.92	0.039	15.54	0.036	16.03	0.040	16.29	0.043	21.97	0.158	≤ 22.98	
		161	5805.0	15.84	0.038	15.46	0.035	15.98	0.040	16.18	0.041	21.89	0.155	≤ 22.98	
165	5825.0	15.86	0.039	15.51	0.036	15.82	0.038	16.11	0.041	21.85	0.153	≤ 22.98			
Mode 12	60	38	5190.0	1.18	0.001	0.81	0.001	1.33	0.001	1.31	0.001	7.18	0.005	≤ 22.98	
		46	5230.0	-0.65	0.001	1.41	0.001	1.42	0.001	0.76	0.001	6.83	0.005	≤ 22.98	
		151	5755.0	16.17	0.041	15.98	0.040	16.62	0.046	17.10	0.051	22.51	0.178	≤ 22.98	
		159	5795.0	16.18	0.041	15.69	0.037	16.27	0.042	16.46	0.044	22.18	0.165	≤ 22.98	
Mode 13	28.8	36	5180.0	1.27	0.001	0.47	0.001	0.94	0.001	0.95	0.001	6.94	0.005	≤ 22.98	
		40	5200.0	1.21	0.001	1.26	0.001	1.33	0.001	0.83	0.001	7.18	0.005	≤ 22.98	
		44	5220.0	1.18	0.001	1.22	0.001	1.28	0.001	0.77	0.001	7.14	0.005	≤ 22.98	
		48	5240.0	0.21	0.001	1.09	0.001	1.31	0.001	1.37	0.001	7.04	0.005	≤ 22.98	
		149	5745.0	16.08	0.041	15.69	0.037	16.22	0.042	16.28	0.042	22.09	0.162	≤ 22.98	
		153	5765.0	16.03	0.040	15.64	0.037	16.11	0.041	16.32	0.043	22.05	0.160	≤ 22.98	
		157	5785.0	16.11	0.041	15.72	0.037	16.20	0.042	16.38	0.043	22.13	0.163	≤ 22.98	
		161	5805.0	16.06	0.040	15.61	0.036	16.14	0.041	16.28	0.042	22.05	0.160	≤ 22.98	
165	5825.0	16.03	0.040	15.70	0.037	15.92	0.039	16.26	0.042	22.00	0.159	≤ 22.98			
Mode 14	60	38	5190.0	1.24	0.001	0.92	0.001	1.55	0.001	1.52	0.001	7.34	0.005	≤ 22.98	
		46	5230.0	-0.58	0.001	1.52	0.001	1.56	0.001	0.93	0.001	6.96	0.005	≤ 22.98	
		151	5755.0	16.30	0.043	16.04	0.040	16.76	0.047	17.22	0.053	22.62	0.183	≤ 22.98	
		159	5795.0	16.31	0.043	15.77	0.038	16.34	0.043	16.66	0.046	22.30	0.170	≤ 22.98	
Mode 15	117.2	42	5210.0	1.66	0.001	1.82	0.002	2.02	0.002	2.19	0.002	7.95	0.006	≤ 22.98	
		155	5775.0	16.08	0.041	15.93	0.039	16.44	0.044	16.83	0.048	22.35	0.172	≤ 22.98	

操作 模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)										
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		Limit (dBm)
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W	
Mode 16	MCS0	36	5180.0	1.01	0.001	0.75	0.001	1.32	0.001	1.49	0.001	7.17	0.005	≤22.98
		40	5200.0	0.99	0.001	0.97	0.001	1.12	0.001	0.61	0.001	6.95	0.005	≤22.98
		44	5220.0	0.75	0.001	0.84	0.001	0.93	0.001	0.55	0.001	6.79	0.005	≤22.98
		48	5240.0	1.13	0.001	2.55	0.002	1.90	0.002	2.02	0.002	7.95	0.006	≤22.98
		149	5745.0	16.16	0.041	15.79	0.038	16.38	0.043	16.71	0.047	22.29	0.170	≤22.98
		153	5765.0	15.99	0.040	15.74	0.037	16.31	0.043	16.66	0.046	22.21	0.166	≤22.98
		157	5785.0	16.11	0.041	15.81	0.038	16.46	0.044	16.87	0.049	22.35	0.172	≤22.98
		161	5805.0	15.96	0.039	15.69	0.037	16.32	0.043	16.68	0.047	22.20	0.166	≤22.98
		165	5825.0	10.79	0.012	10.22	0.011	10.84	0.012	11.29	0.013	16.82	0.048	≤22.98
Mode 17	MCS0	38	5190.0	1.35	0.001	1.32	0.001	1.58	0.001	1.56	0.001	7.47	0.006	≤22.98
		46	5230.0	-0.51	0.001	1.54	0.001	1.63	0.001	0.82	0.001	6.97	0.005	≤22.98
		151	5755.0	15.52	0.036	15.28	0.034	15.86	0.039	16.18	0.041	21.74	0.149	≤22.98
		159	5795.0	16.21	0.042	15.86	0.039	16.35	0.043	16.73	0.047	22.32	0.171	≤22.98
Mode 18	MCS0	42	5210.0	1.89	0.002	1.90	0.002	2.09	0.002	1.69	0.001	7.92	0.006	≤22.98
		155	5775.0	15.60	0.036	15.56	0.036	15.73	0.037	16.16	0.041	21.79	0.151	≤22.98

Max_EIRP at any elevation angle > 30° form horizon

操作 模式	Frequency (MHz)	Data Rate	Max_EIRP at any elevation angle > 30° form horizon			Limit (dBm)
			Max. Average power (dBm)	Antenna Gain (dBi)	E.I.R.P (dBm)	
Mode 10	5180.0	6 M	13.72	7.00	20.72	21
	5200.0		13.68	7.00	20.68	
	5220.0		13.63	7.00	20.63	
	5240.0		13.66	7.00	20.66	
Mode 11	5180.0	28.8 M	6.88	13.02	19.90	21
	5200.0		7.13	13.02	20.15	
	5220.0		7.09	13.02	20.11	
	5240.0		6.98	13.02	20.00	
Mode 12	5190.0	60 M	7.18	13.02	20.20	21
	5230.0		6.83	13.02	19.85	
Mode 13	5180.0	28.8 M	6.94	13.02	19.96	21
	5200.0		7.18	13.02	20.20	
	5220.0		7.14	13.02	20.16	
	5240.0		7.04	13.02	20.06	
Mode 14	5190.0	60 M	7.34	13.02	20.36	21
	5230.0		6.96	13.02	19.98	
Mode 15	5210.0	117.2 M	7.95	13.02	20.97	21
Mode 16	5180.0	MCS0	7.17	13.02	20.19	21
	5200.0		6.95	13.02	19.97	
	5220.0		6.79	13.02	19.81	
	5240.0		7.95	13.02	20.97	
Mode 17	5190.0	MCS0	7.47	13.02	20.49	21
	5230.0		6.97	13.02	19.99	
Mode 18	5210.0	MCS0	7.92	13.02	20.94	21

Note: The relevant measured result has the offset with cable loss already.

Maximum Power Spectral Density

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	36	5180.0	2.156	0.013	2.169	16
	40	5200.0	2.280	0.013	2.293	16
	48	5240.0	2.102	0.013	2.115	16
Mode 13	36	5180.0	-10.388	0.013	-10.375	9.98
	40	5200.0	-10.248	0.013	-10.235	9.98
	48	5240.0	-10.884	0.013	-10.871	9.98
Mode 14	38	5190.0	-13.829	0.047	-13.782	9.98
	46	5230.0	-15.411	0.047	-15.364	9.98
Mode 15	42	5210.0	-15.834	0.124	-15.710	9.98
Mode 16	36	5180.0	-11.188	0.013	-11.175	9.98
	40	5200.0	-10.470	0.013	-10.457	9.98
	48	5240.0	-10.855	0.013	-10.842	9.98
Mode 17	38	5190.0	-13.875	0.063	-13.812	9.98
	46	5230.0	-15.388	0.063	-15.325	9.98
Mode 18	42	5210.0	-15.547	0.093	-15.454	9.98

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	149	5745.0	-0.044	0.026	6.972	29
	157	5785.0	-0.056	0.026	6.960	29
	165	5825.0	1.427	0.026	8.443	29
Mode 13	149	5745.0	-4.801	0.021	2.210	22.98
	157	5785.0	-4.828	0.021	2.183	22.98
	165	5825.0	-4.912	0.021	2.099	22.98
Mode 14	151	5755.0	-7.290	0.032	-0.269	22.98
	159	5795.0	-7.204	0.032	-0.183	22.98
Mode 15	155	5775.0	-10.109	0.135	-2.984	22.98
Mode 16	149	5745.0	-6.232	0.021	0.779	22.98
	157	5785.0	-6.303	0.021	0.708	22.98
	165	5825.0	-11.287	0.021	-4.276	22.98
Mode 17	151	5755.0	-9.041	0.073	-1.978	22.98
	159	5795.0	-8.424	0.073	-1.361	22.98
Mode 18	155	5775.0	-11.682	0.124	-4.569	22.98

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180.0	-11.192	0.013	-11.179	9.98
	40	5200.0	-10.198	0.013	-10.185	9.98
	48	5240.0	-9.990	0.013	-9.977	9.98
Mode 14	38	5190.0	-14.144	0.047	-14.097	9.98
	46	5230.0	-13.298	0.047	-13.251	9.98
Mode 15	42	5210.0	-15.742	0.124	-15.618	9.98
Mode 16	36	5180.0	-11.439	0.013	-11.426	9.98
	40	5200.0	-10.455	0.013	-10.442	9.98
	48	5240.0	-9.223	0.013	-9.210	9.98
Mode 17	38	5190.0	-13.903	0.063	-13.840	9.98
	46	5230.0	-13.330	0.063	-13.267	9.98
Mode 18	42	5210.0	-15.573	0.093	-15.480	9.98

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745.0	-5.258	0.021	1.753	22.98
	157	5785.0	-5.265	0.021	1.746	22.98
	165	5825.0	-5.278	0.021	1.733	22.98
Mode 14	151	5755.0	-7.532	0.032	-0.511	22.98
	159	5795.0	-7.762	0.032	-0.741	22.98
Mode 15	155	5775.0	-10.222	0.135	-3.097	22.98
Mode 16	149	5745.0	-6.541	0.021	0.470	22.98
	157	5785.0	-6.677	0.021	0.334	22.98
	165	5825.0	-11.819	0.021	-4.808	22.98
Mode 17	151	5755.0	-9.306	0.073	-2.243	22.98
	159	5795.0	-8.713	0.073	-1.650	22.98
Mode 18	155	5775.0	-11.724	0.124	-4.611	22.98

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

ANT-2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180.0	-10.714	0.013	-10.701	9.98
	40	5200.0	-10.120	0.013	-10.107	9.98
	48	5240.0	-9.779	0.013	-9.766	9.98
Mode 14	38	5190.0	-13.511	0.047	-13.464	9.98
	46	5230.0	-13.270	0.047	-13.223	9.98
Mode 15	42	5210.0	-15.398	0.124	-15.274	9.98
Mode 16	36	5180.0	-10.877	0.013	-10.864	9.98
	40	5200.0	-10.336	0.013	-10.323	9.98
	48	5240.0	-10.017	0.013	-10.004	9.98
Mode 17	38	5190.0	-13.641	0.063	-13.578	9.98
	46	5230.0	-13.242	0.063	-13.179	9.98
Mode 18	42	5210.0	-15.382	0.093	-15.289	9.98

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745.0	-4.690	0.021	2.321	22.98
	157	5785.0	-4.609	0.021	2.402	22.98
	165	5825.0	-4.905	0.021	2.106	22.98
Mode 14	151	5755.0	-6.750	0.032	0.271	22.98
	159	5795.0	-7.201	0.032	-0.180	22.98
Mode 15	155	5775.0	-9.635	0.135	-2.510	22.98
Mode 16	149	5745.0	-5.982	0.021	1.029	22.98
	157	5785.0	-6.056	0.021	0.955	22.98
	165	5825.0	-11.263	0.021	-4.252	22.98
Mode 17	151	5755.0	-8.726	0.073	-1.663	22.98
	159	5795.0	-8.169	0.073	-1.106	22.98
Mode 18	155	5775.0	-11.534	0.124	-4.421	22.98

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

ANT-3						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180.0	-10.692	0.013	-10.679	9.98
	40	5200.0	-10.624	0.013	-10.611	9.98
	48	5240.0	-9.719	0.013	-9.706	9.98
Mode 14	38	5190.0	-13.542	0.047	-13.495	9.98
	46	5230.0	-13.896	0.047	-13.849	9.98
Mode 15	42	5210.0	-15.334	0.124	-15.210	9.98
Mode 16	36	5180.0	-10.699	0.013	-10.686	9.98
	40	5200.0	-10.848	0.013	-10.835	9.98
	48	5240.0	-9.965	0.013	-9.952	9.98
Mode 17	38	5190.0	-13.666	0.063	-13.603	9.98
	46	5230.0	-14.053	0.063	-13.990	9.98
Mode 18	42	5210.0	-15.816	0.093	-15.723	9.98

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-3						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745.0	-4.634	0.021	2.377	22.98
	157	5785.0	-4.427	0.021	2.584	22.98
	165	5825.0	-4.445	0.021	2.566	22.98
Mode 14	151	5755.0	-6.320	0.032	0.701	22.98
	159	5795.0	-6.886	0.032	0.135	22.98
Mode 15	155	5775.0	-9.220	0.135	-2.095	22.98
Mode 16	149	5745.0	-5.607	0.021	1.404	22.98
	157	5785.0	-5.618	0.021	1.393	22.98
	165	5825.0	-10.774	0.021	-3.763	22.98
Mode 17	151	5755.0	-8.364	0.073	-1.301	22.98
	159	5795.0	-7.684	0.073	-0.621	22.98
Mode 18	155	5775.0	-11.065	0.124	-3.952	22.98

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

ANT-0+1+2+3				
操作模式	頻道 (CH)	頻率 (MHz)	計算值(dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180.0	-4.703	9.98
	40	5200.0	-4.259	9.98
	48	5240.0	-4.035	9.98
Mode 14	38	5190.0	-7.681	9.98
	46	5230.0	-7.819	9.98
Mode 15	42	5210.0	-9.427	9.98
Mode 16	36	5180.0	-5.008	9.98
	40	5200.0	-4.489	9.98
	48	5240.0	-3.943	9.98
Mode 17	38	5190.0	-7.686	9.98
	46	5230.0	-7.839	9.98
Mode 18	42	5210.0	-9.463	9.98

ANT-0+1+2+3				
操作模式	頻道 (CH)	頻率 (MHz)	計算值(dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745.0	8.192	22.98
	157	5785.0	8.260	22.98
	165	5825.0	8.156	22.98
Mode 14	151	5755.0	6.095	22.98
	159	5795.0	5.790	22.98
Mode 15	155	5775.0	3.367	22.98
Mode 16	149	5745.0	6.954	22.98
	157	5785.0	6.885	22.98
	165	5825.0	1.761	22.98
Mode 17	151	5755.0	4.239	22.98
	159	5795.0	4.853	22.98
Mode 18	155	5775.0	1.641	22.98

Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0

5180 MHz



5200 MHz




5240 MHz




Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0


5745 MHz

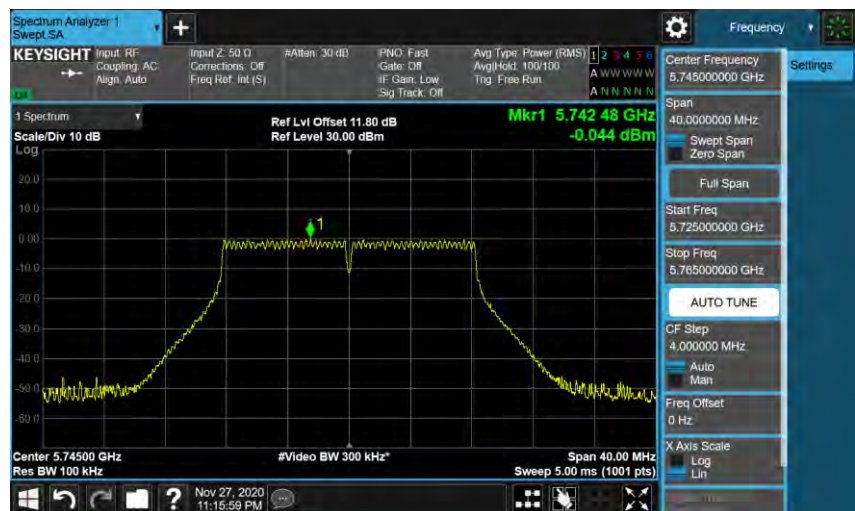

5785 MHz

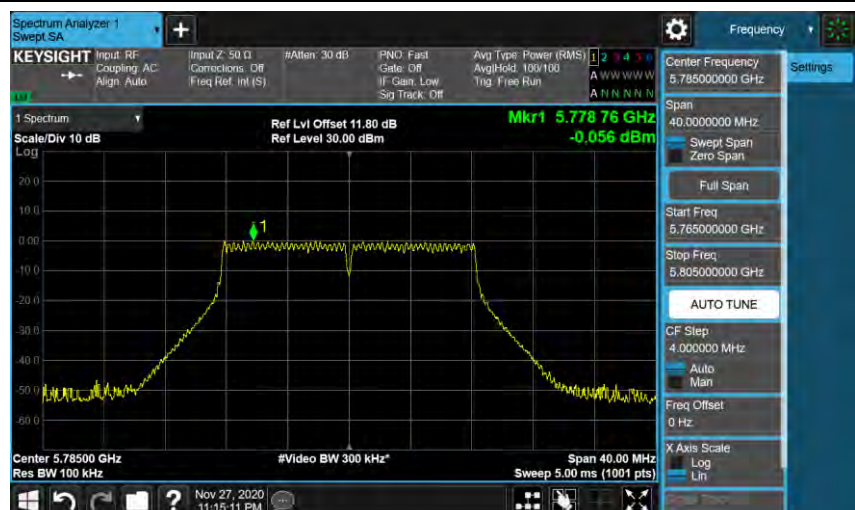

5825 MHz

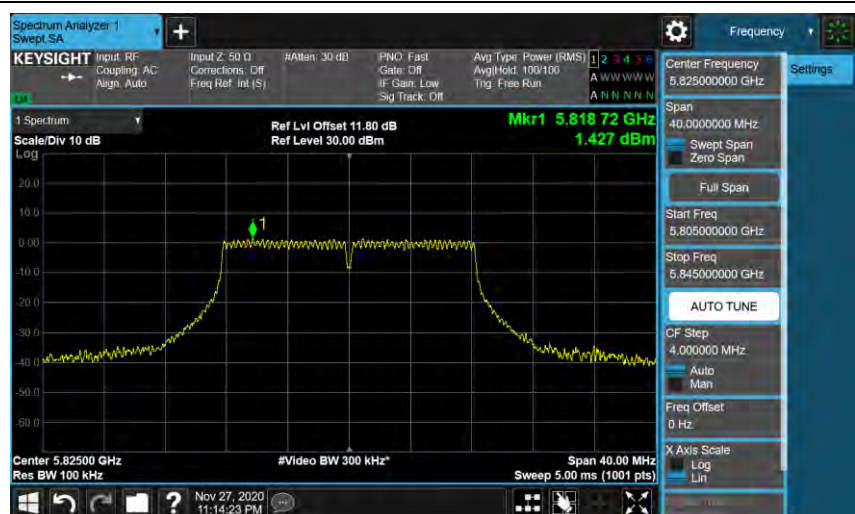


Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0

5180 MHz



5200 MHz

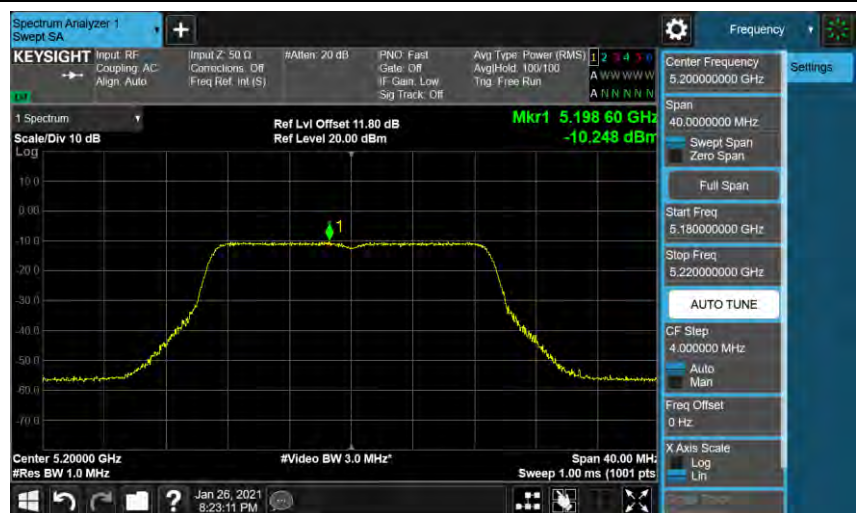


5240 MHz




Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0


5745 MHz

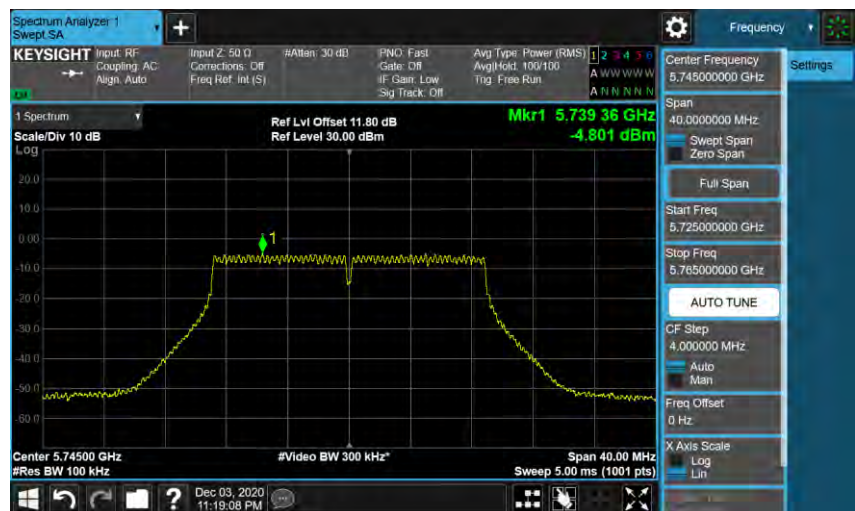

5785 MHz

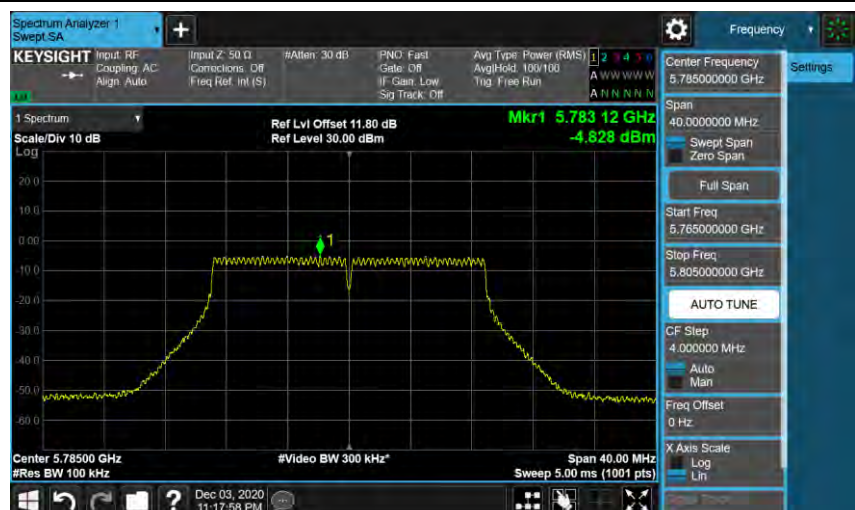

5825 MHz

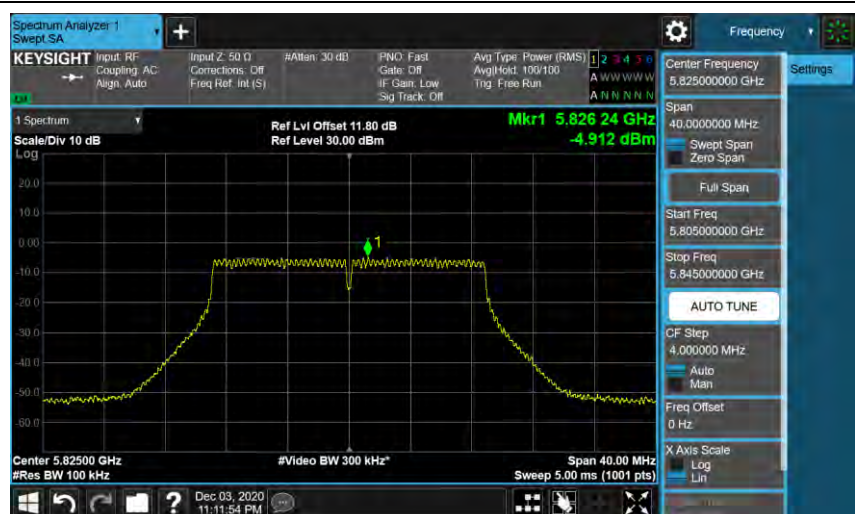

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0

5190 MHz



5230 MHz



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0

5755 MHz



5795 MHz



Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0

5210 MHz




Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0

5775 MHz



Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0

5180 MHz

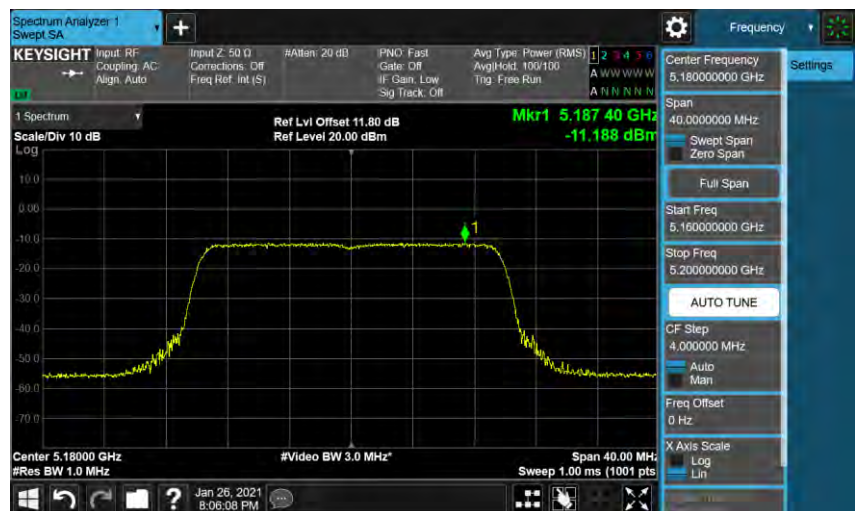

5200 MHz




5240 MHz



Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0


5745 MHz

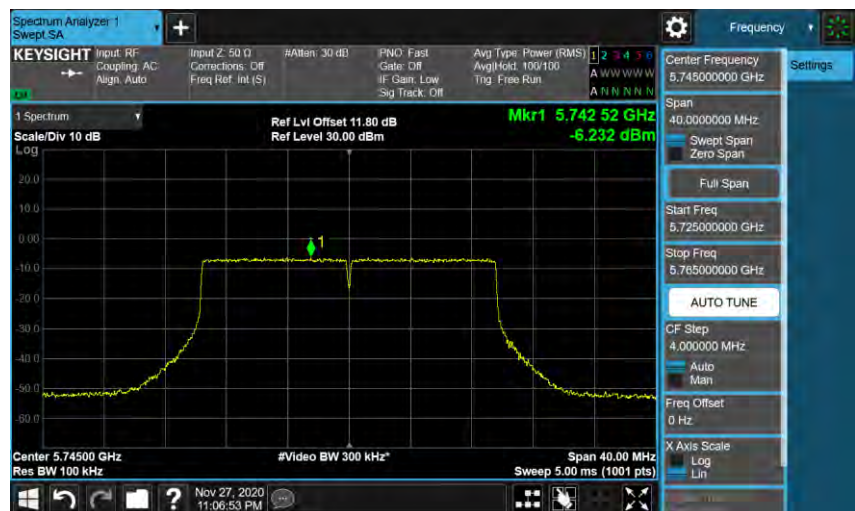

5785 MHz



5825 MHz

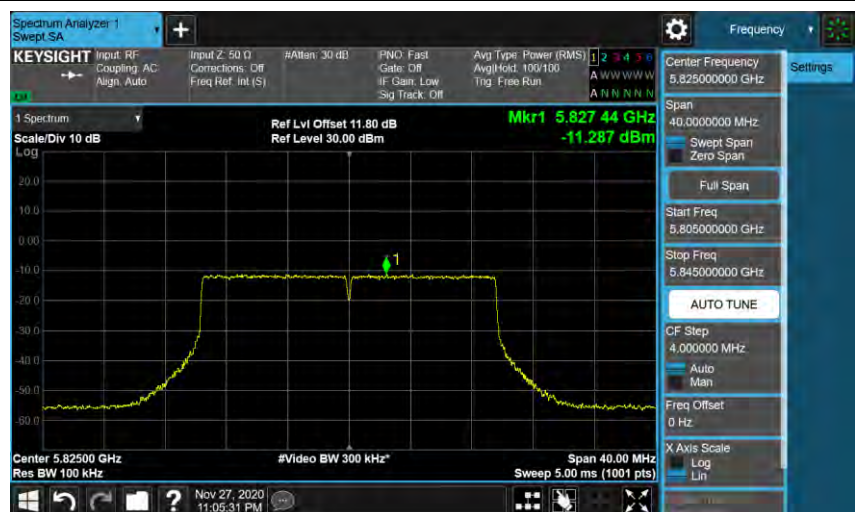

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0

5190 MHz



5230 MHz



Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0

5755 MHz




5795 MHz



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0

5210 MHz

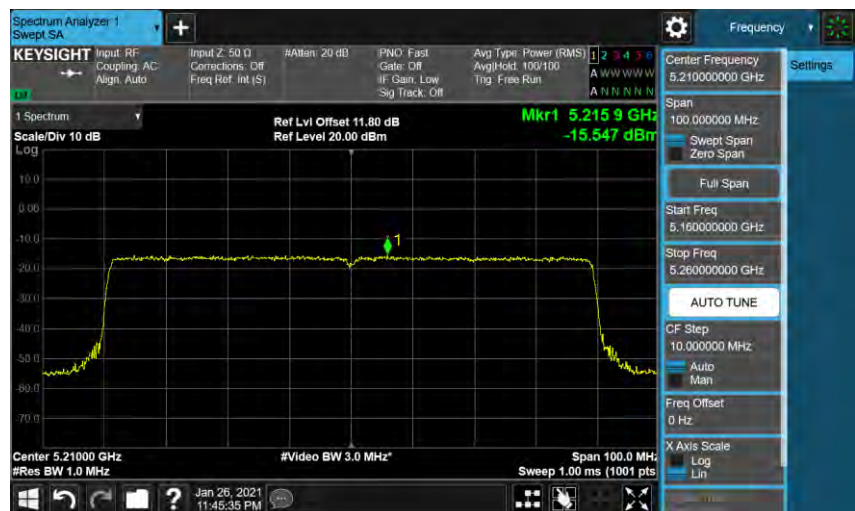

Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0

5775 MHz



Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1

5180 MHz



5200 MHz




5240 MHz




Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1


5745 MHz

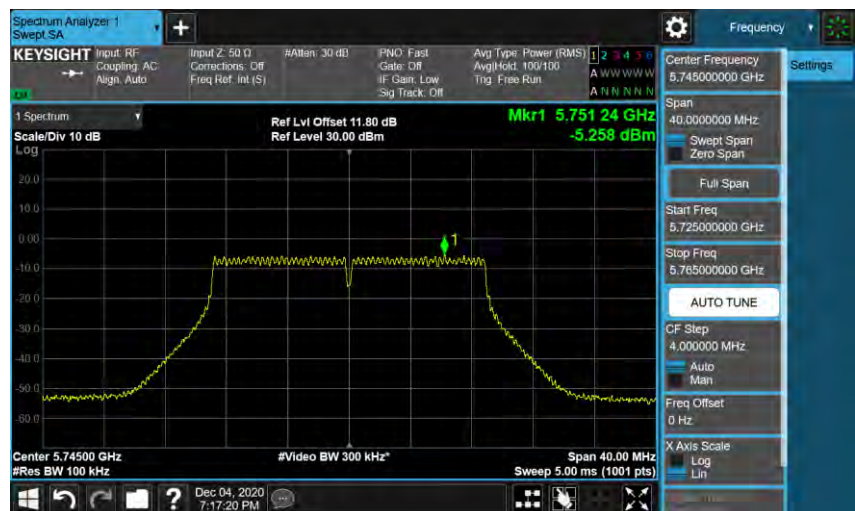

5785 MHz

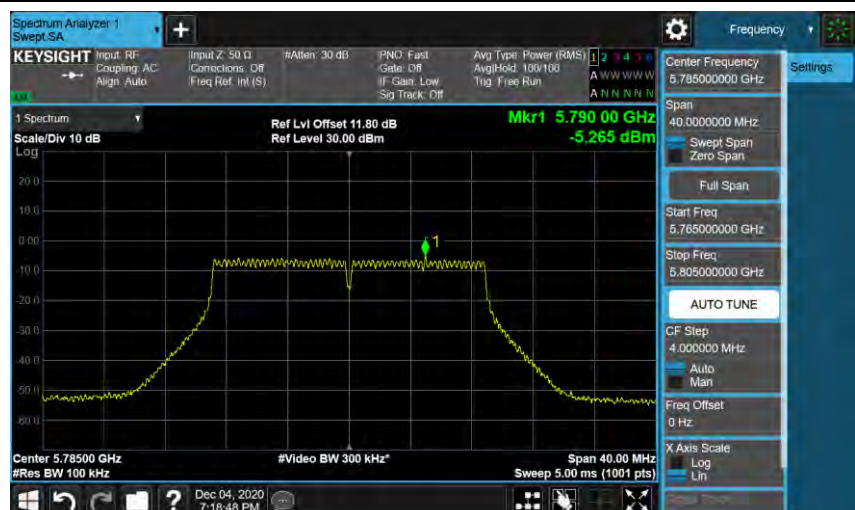

5825 MHz

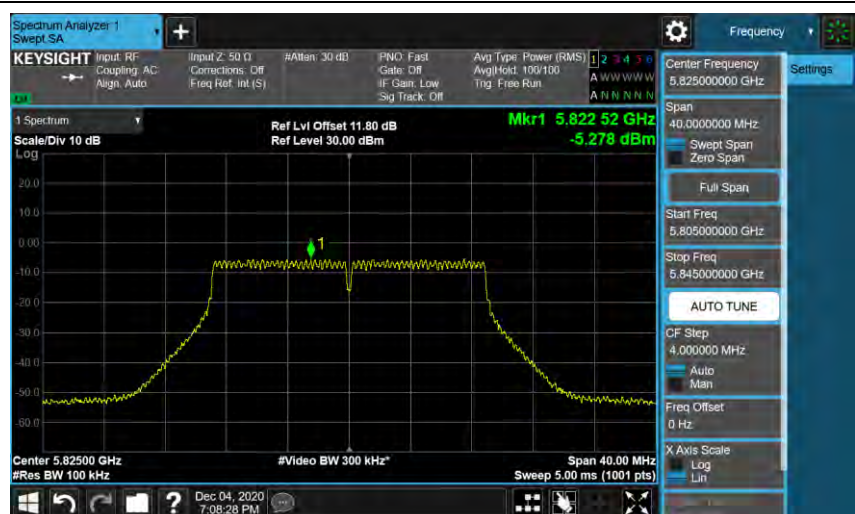


Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1

5190 MHz




5230 MHz

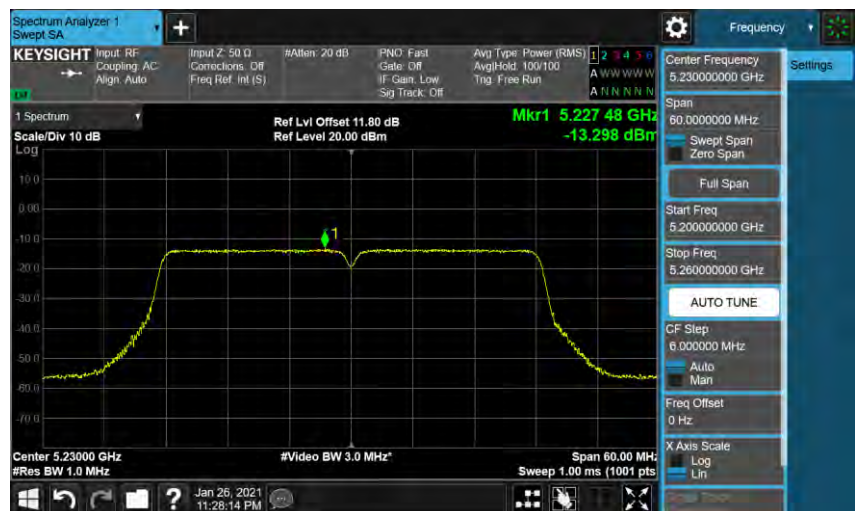


Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1

5755 MHz

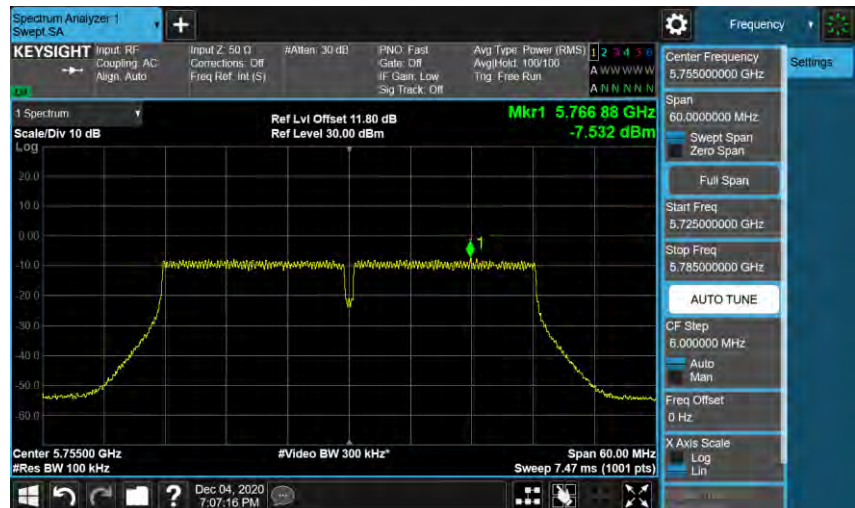

5795 MHz

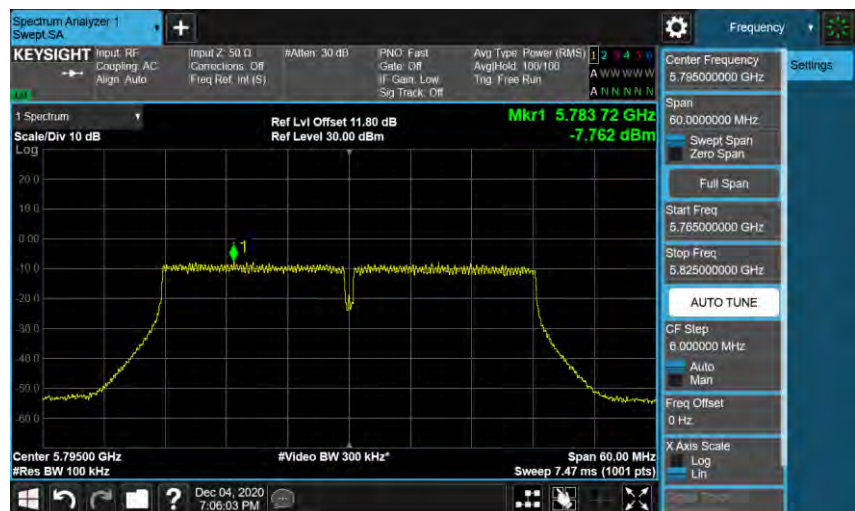


Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1

5210 MHz




Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1

5775 MHz

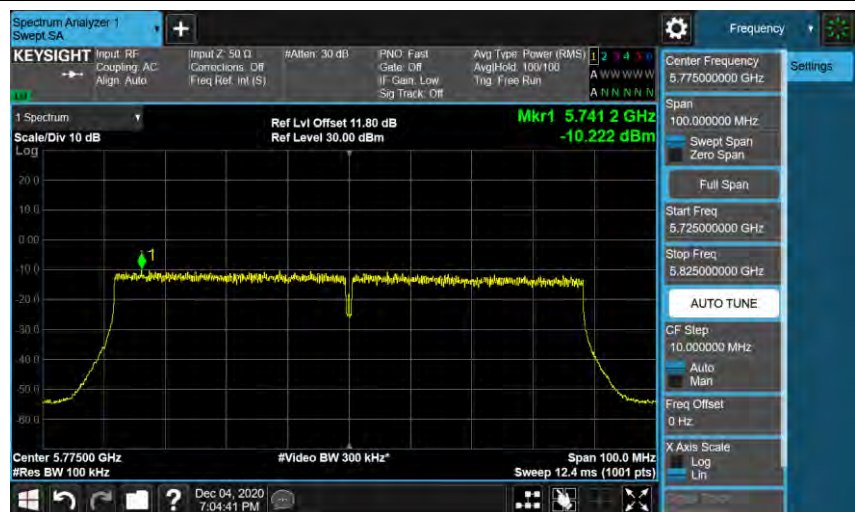

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1

5180 MHz

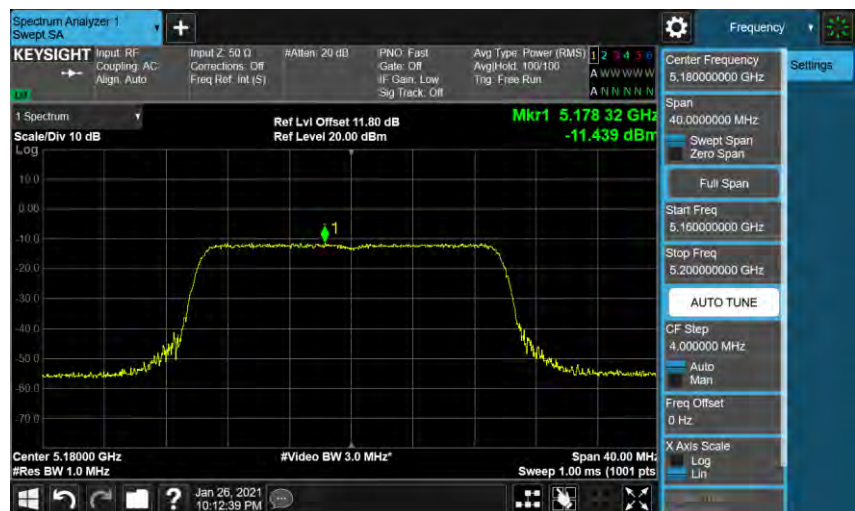

5200 MHz



5240 MHz



Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1


5745 MHz



5785 MHz



5825 MHz

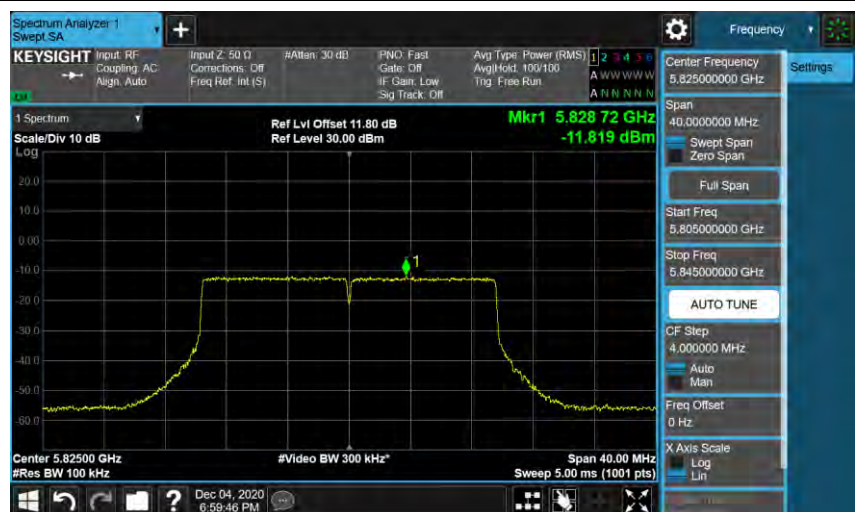

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1

5190 MHz



5230 MHz



Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1

5755 MHz



5795 MHz



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1

5210 MHz



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1

5775 MHz

