


Site: AC1	Time: 2017/09/06 - 04:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

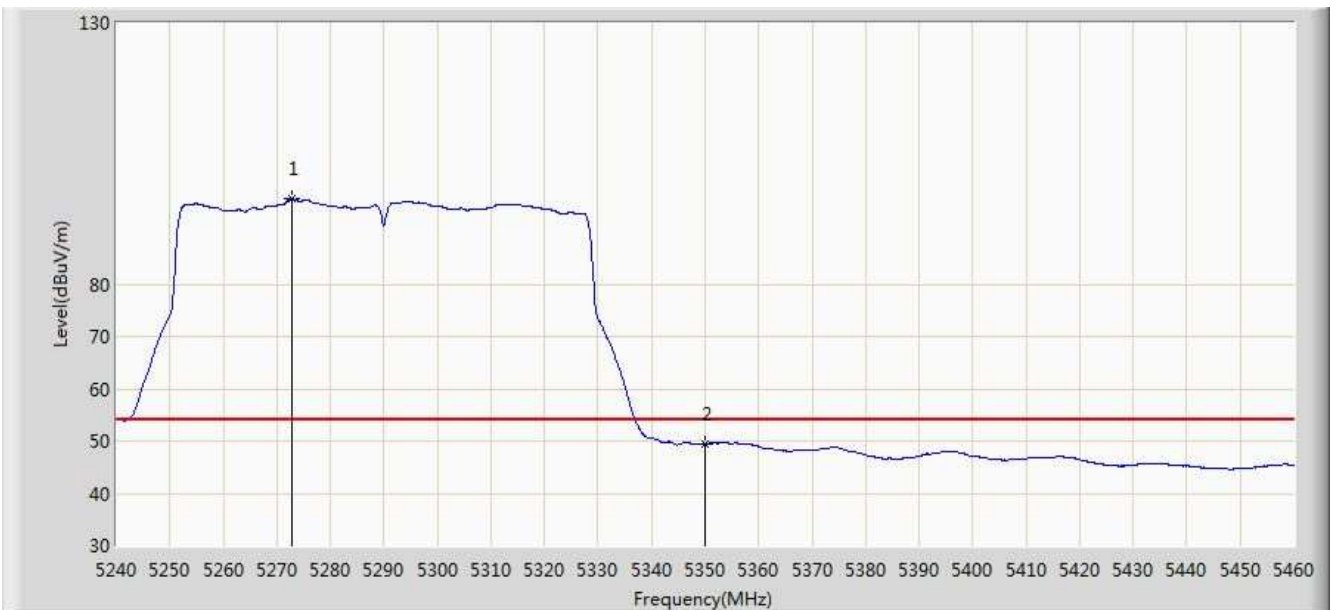


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5272.780	96.312	92.479	N/A	N/A	3.833	AV
2			5350.000	49.447	45.542	-4.553	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 05:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

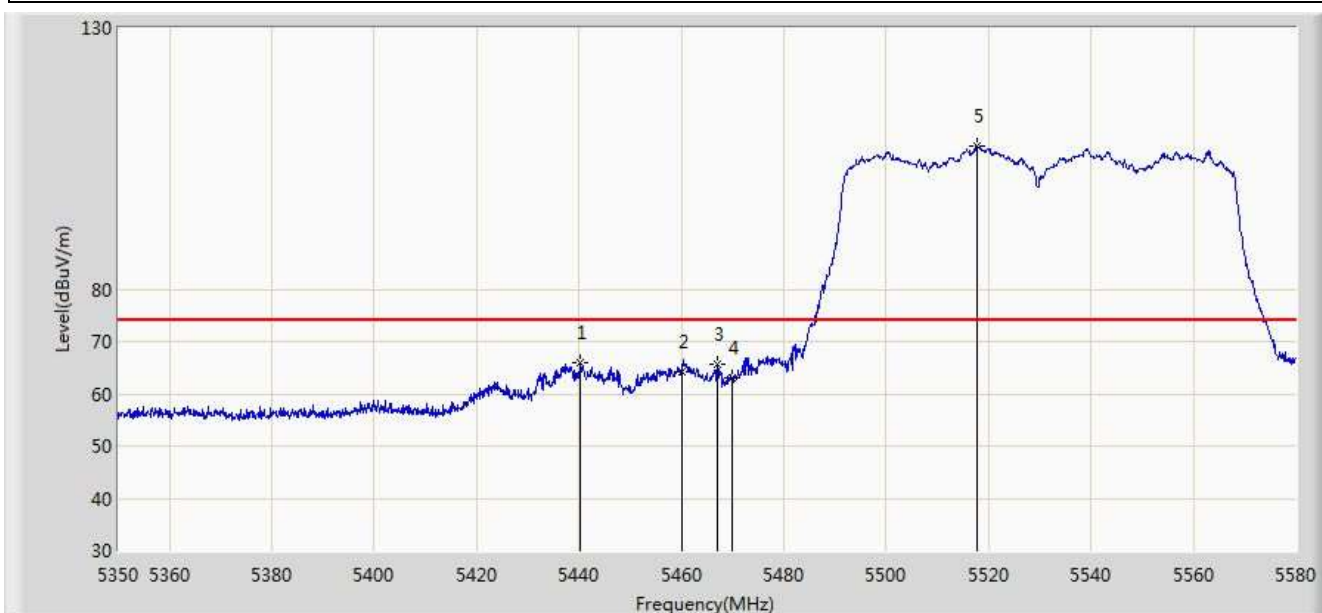


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5440.275	65.848	61.723	-8.152	74.000	4.126	PK
2			5460.000	64.210	60.030	-9.790	74.000	4.180	PK
3			5466.955	65.587	61.391	-8.413	74.000	4.196	PK
4			5470.000	62.909	58.707	-11.091	74.000	4.202	PK
5		*	5517.785	107.488	103.164	N/A	N/A	4.324	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 05:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

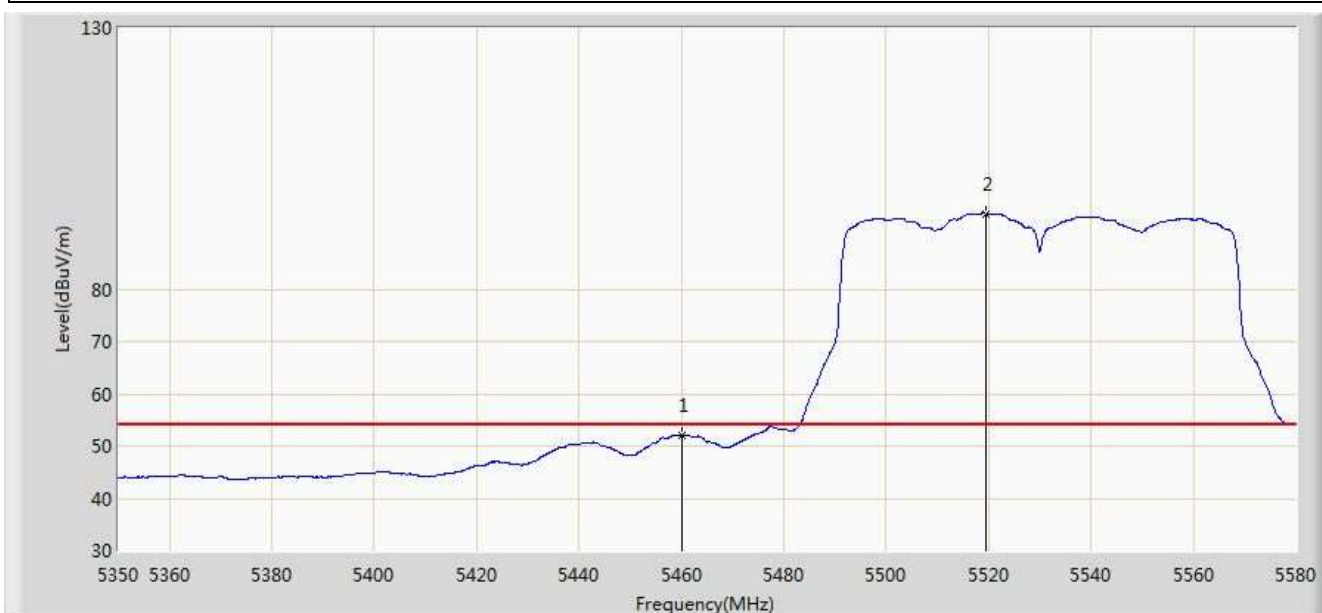


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.948	47.768	-2.052	54.000	4.180	AV
2		*	5519.395	94.470	90.141	N/A	N/A	4.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 05:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

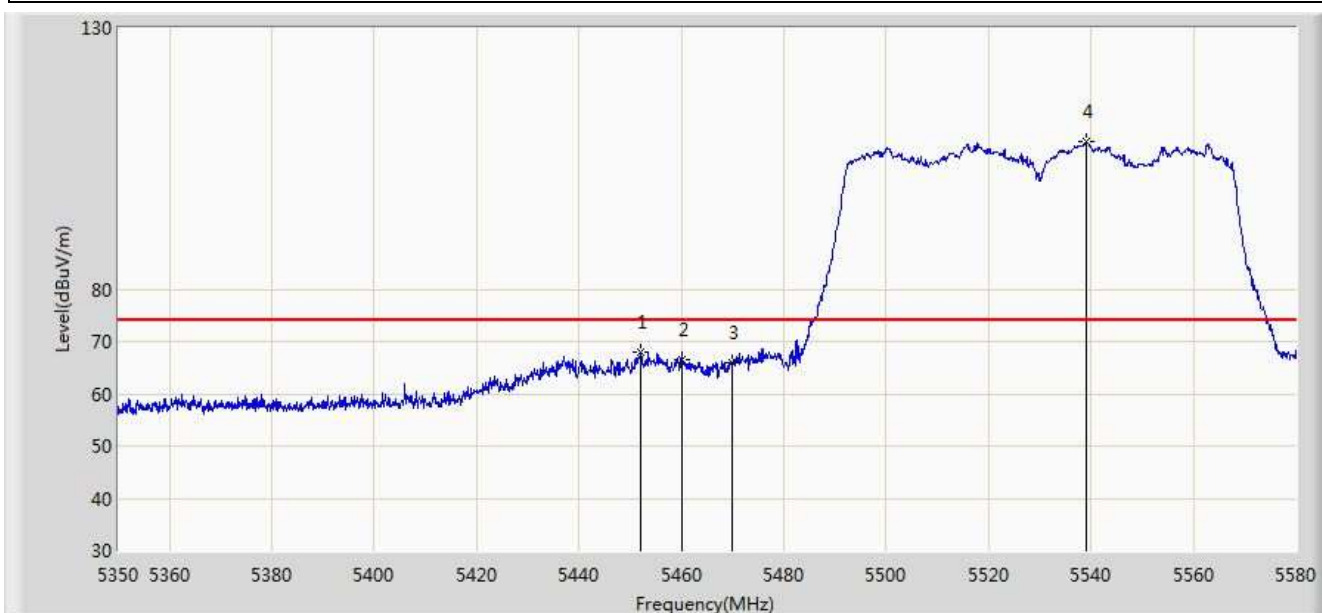


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.005	67.882	63.721	-6.118	74.000	4.161	PK
2			5460.000	66.592	62.412	-7.408	74.000	4.180	PK
3			5470.000	66.081	61.879	-7.919	74.000	4.202	PK
4		*	5539.175	108.170	103.781	N/A	N/A	4.389	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 05:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

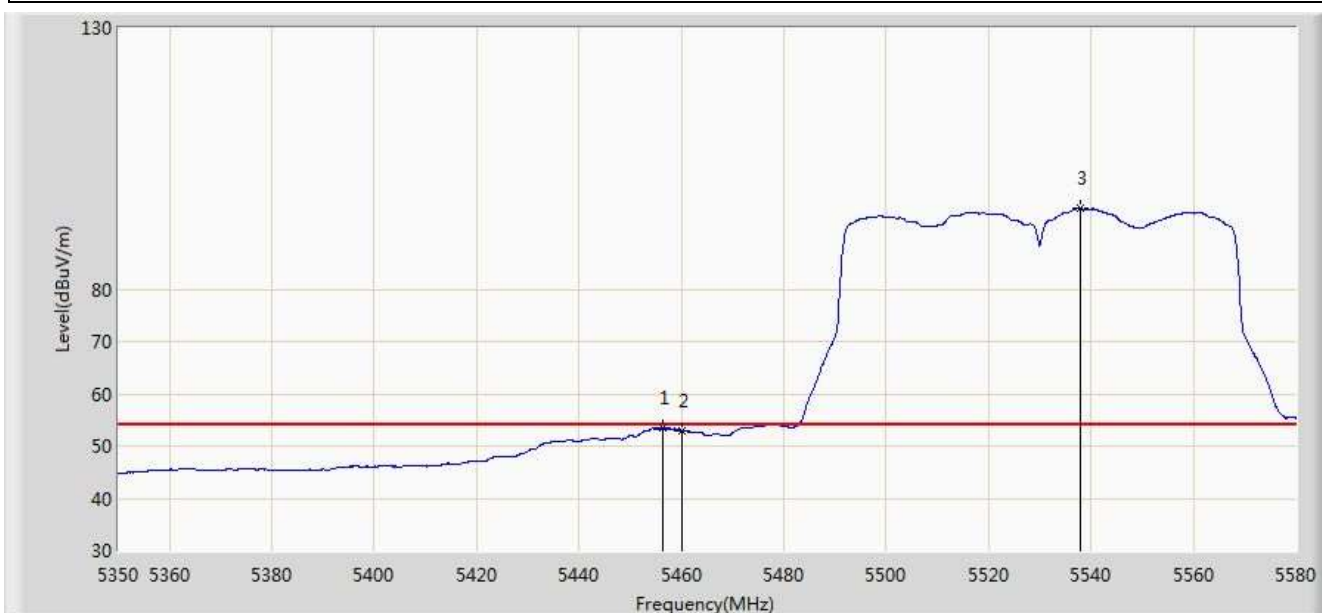


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.490	53.568	49.395	-0.432	54.000	4.172	AV
2			5460.000	52.867	48.687	-1.133	54.000	4.180	AV
3		*	5538.025	95.391	91.005	N/A	N/A	4.386	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 05:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

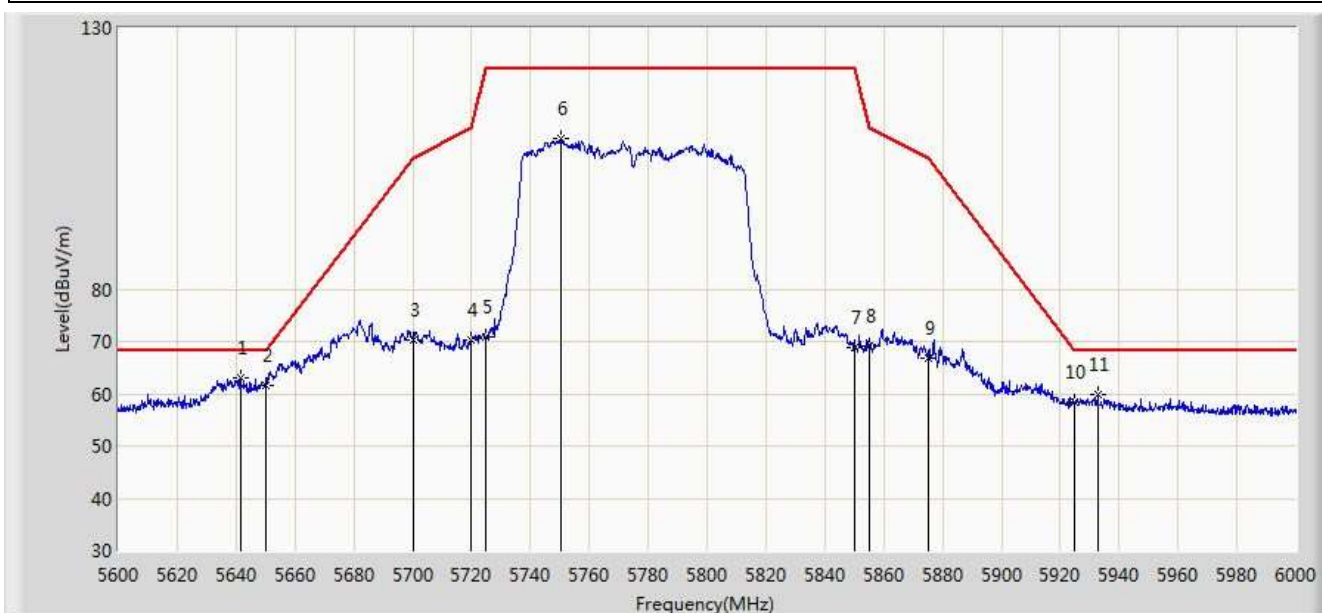


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.600	62.920	58.277	-5.280	68.200	4.643	PK
2			5650.000	61.476	56.805	-6.724	68.200	4.671	PK
3			5700.000	70.276	65.398	-34.924	105.200	4.878	PK
4			5720.000	70.253	65.256	-40.547	110.800	4.997	PK
5			5725.000	70.790	65.761	-51.410	122.200	5.029	PK
6			5750.600	108.982	103.795	N/A	N/A	5.187	PK
7			5850.000	68.936	63.210	-53.264	122.200	5.726	PK
8			5855.000	69.187	63.441	-41.613	110.800	5.746	PK
9			5875.000	66.954	61.134	-38.246	105.200	5.820	PK
10			5925.000	58.275	52.309	-9.925	68.200	5.967	PK
11			5932.600	59.750	53.765	-8.450	68.200	5.985	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 05:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

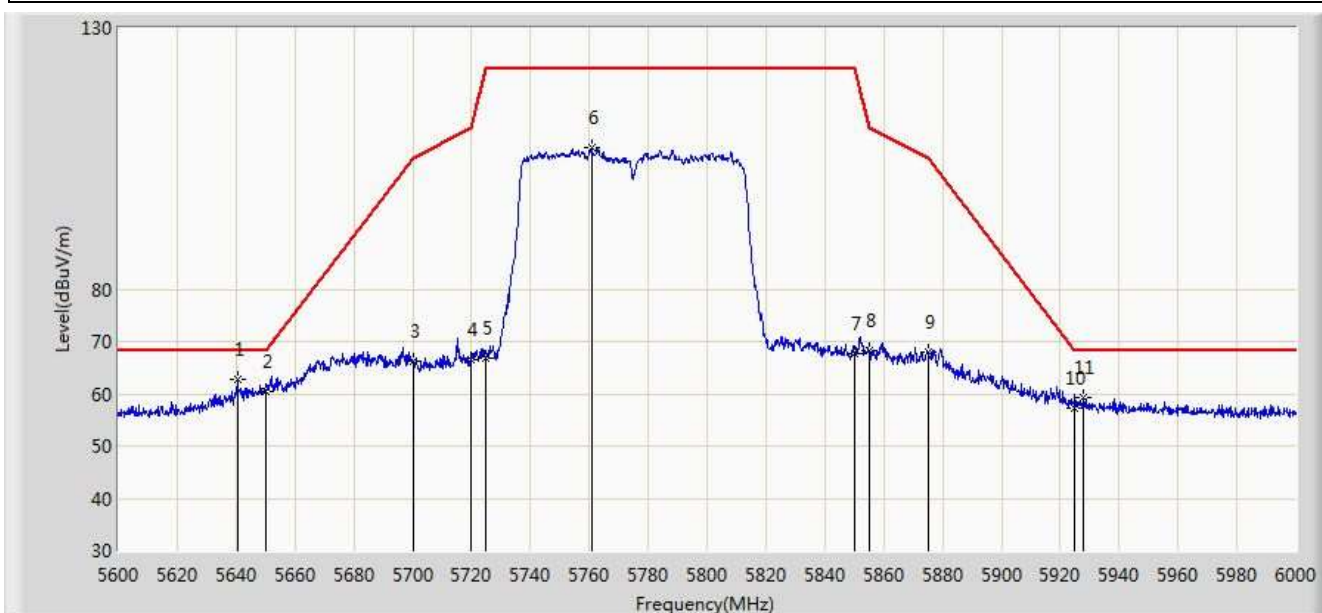


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5640.400	62.788	58.149	-5.412	68.200	4.638	PK
2			5650.000	60.475	55.804	-7.725	68.200	4.671	PK
3			5700.000	66.321	61.443	-38.879	105.200	4.878	PK
4			5720.000	66.658	61.661	-44.142	110.800	4.997	PK
5			5725.000	66.813	61.784	-55.387	122.200	5.029	PK
6			5760.800	106.959	101.715	N/A	N/A	5.244	PK
7			5850.000	67.622	61.896	-54.578	122.200	5.726	PK
8			5855.000	68.399	62.653	-42.401	110.800	5.746	PK
9			5875.000	68.019	62.199	-37.181	105.200	5.820	PK
10			5925.000	57.234	51.268	-10.966	68.200	5.967	PK
11			5928.000	59.416	53.442	-8.784	68.200	5.974	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

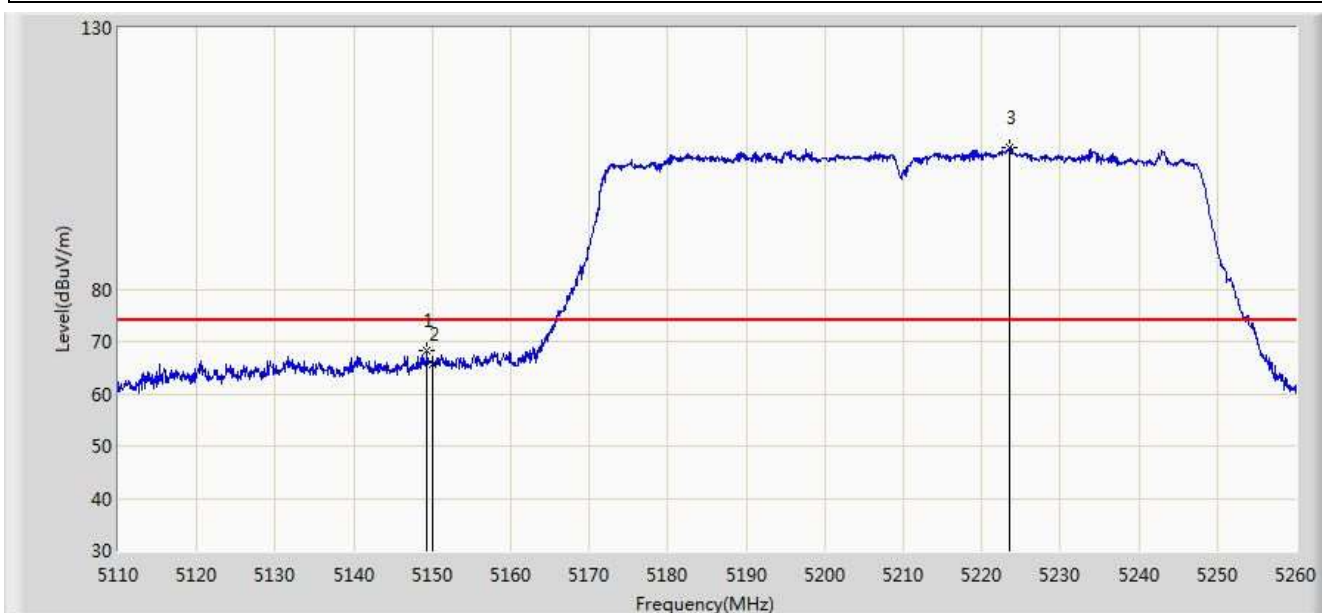

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.375	68.238	64.067	-5.762	74.000	4.171	PK
2			5150.000	65.712	61.543	-8.288	74.000	4.170	PK
3		*	5223.550	107.214	103.286	N/A	N/A	3.928	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.179	49.010	-0.821	54.000	4.170	AV
2		*	5195.800	93.588	89.575	N/A	N/A	4.013	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

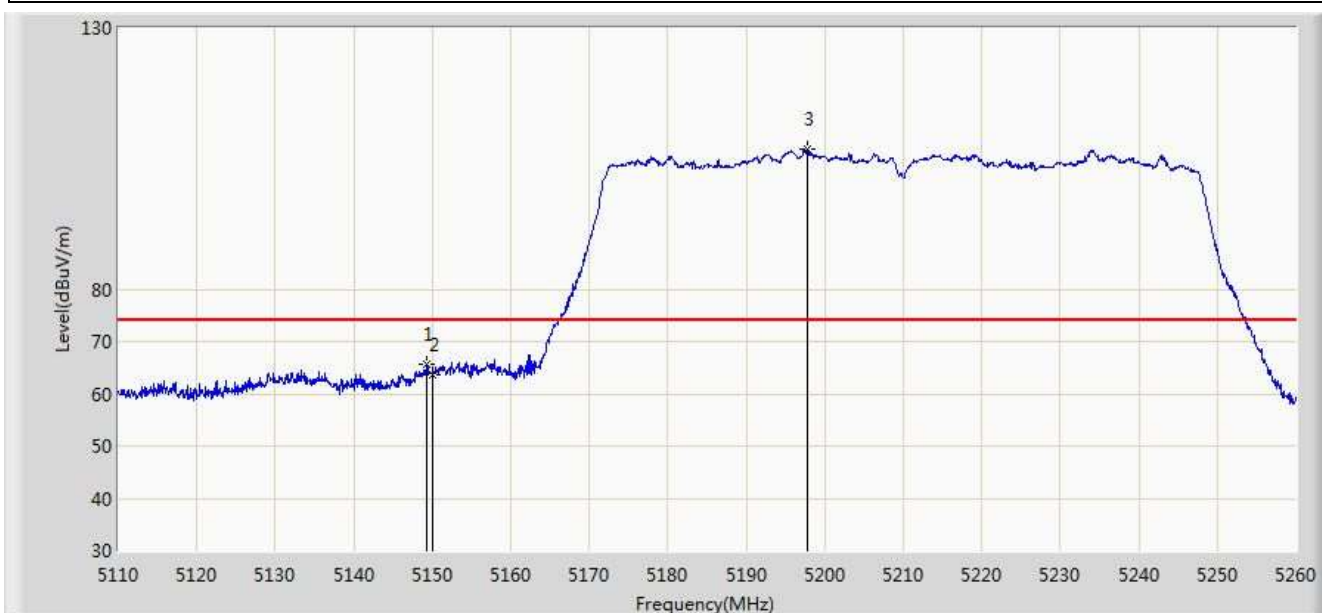


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.300	65.749	61.578	-8.251	74.000	4.171	PK
2			5150.000	63.731	59.562	-10.269	74.000	4.170	PK
3		*	5197.825	106.668	102.662	N/A	N/A	4.006	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

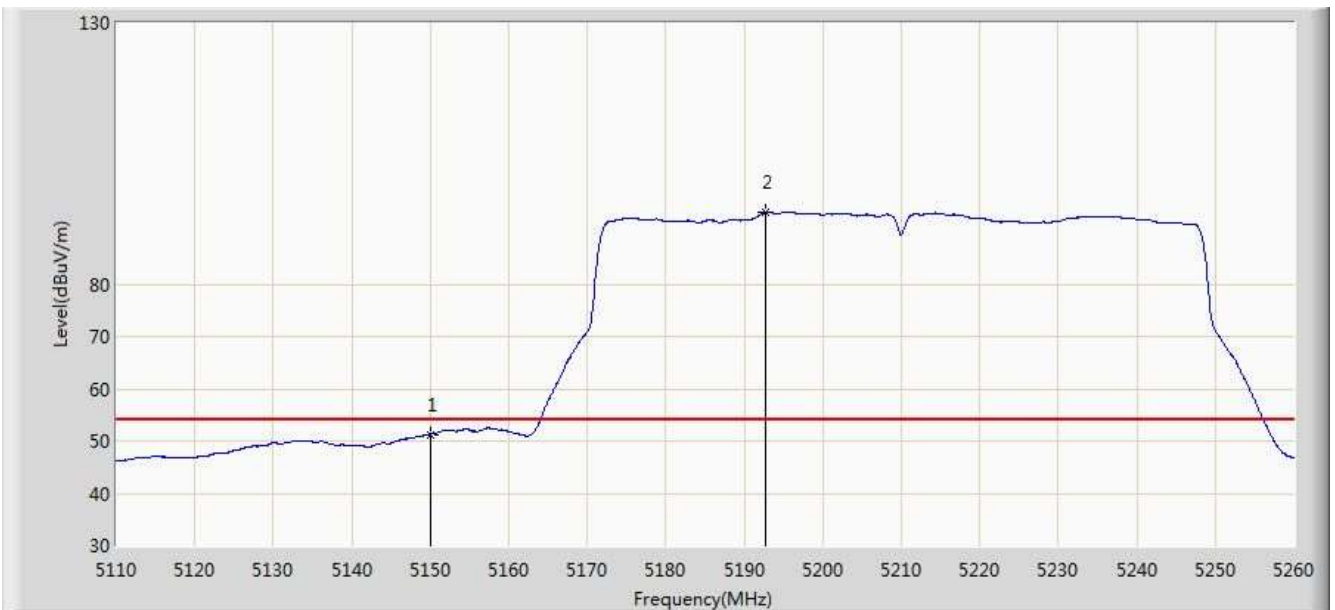


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.264	47.095	-2.736	54.000	4.170	AV
2		*	5192.725	93.760	89.736	N/A	N/A	4.023	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

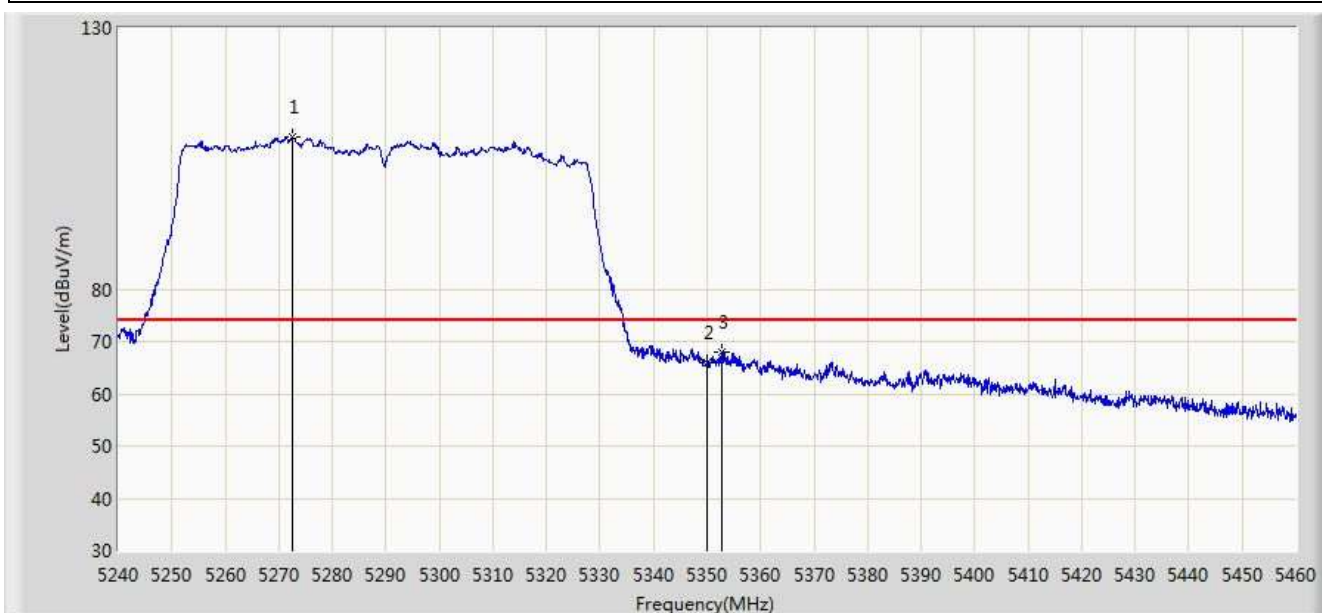


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5272.450	109.044	105.211	N/A	N/A	3.833	PK
2			5350.000	66.067	62.162	-7.933	74.000	3.904	PK
3			5352.860	68.103	64.193	-5.897	74.000	3.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

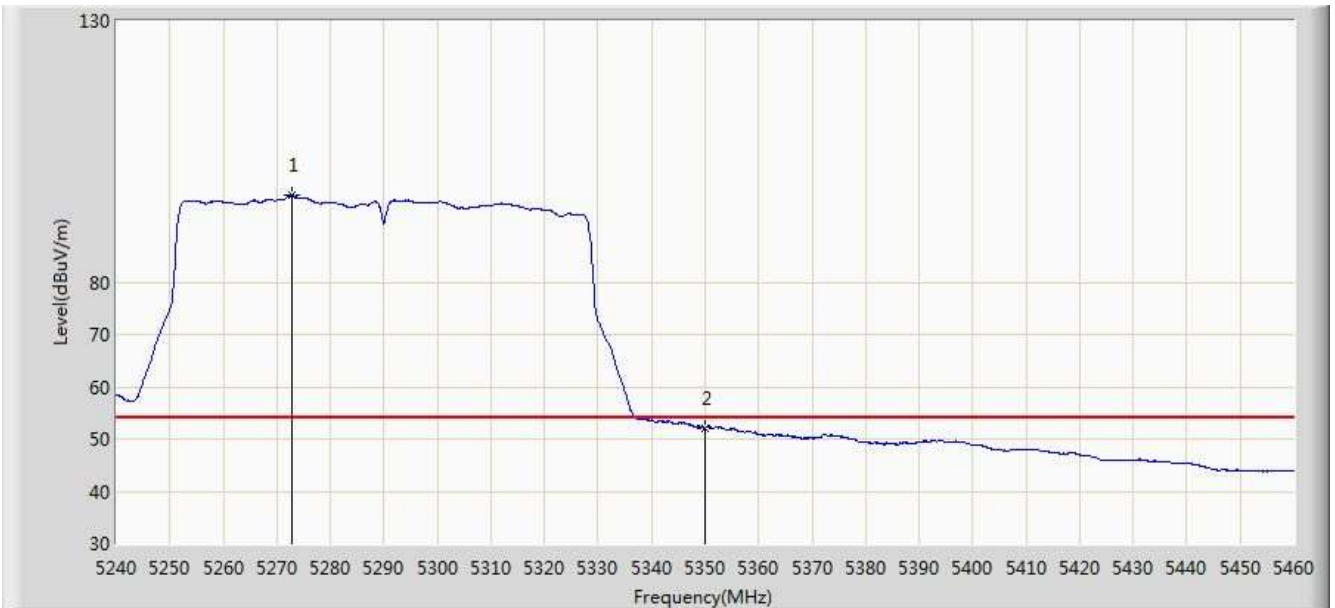


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5272.780	96.646	92.813	N/A	N/A	3.833	AV
2			5350.000	52.098	48.193	-1.902	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

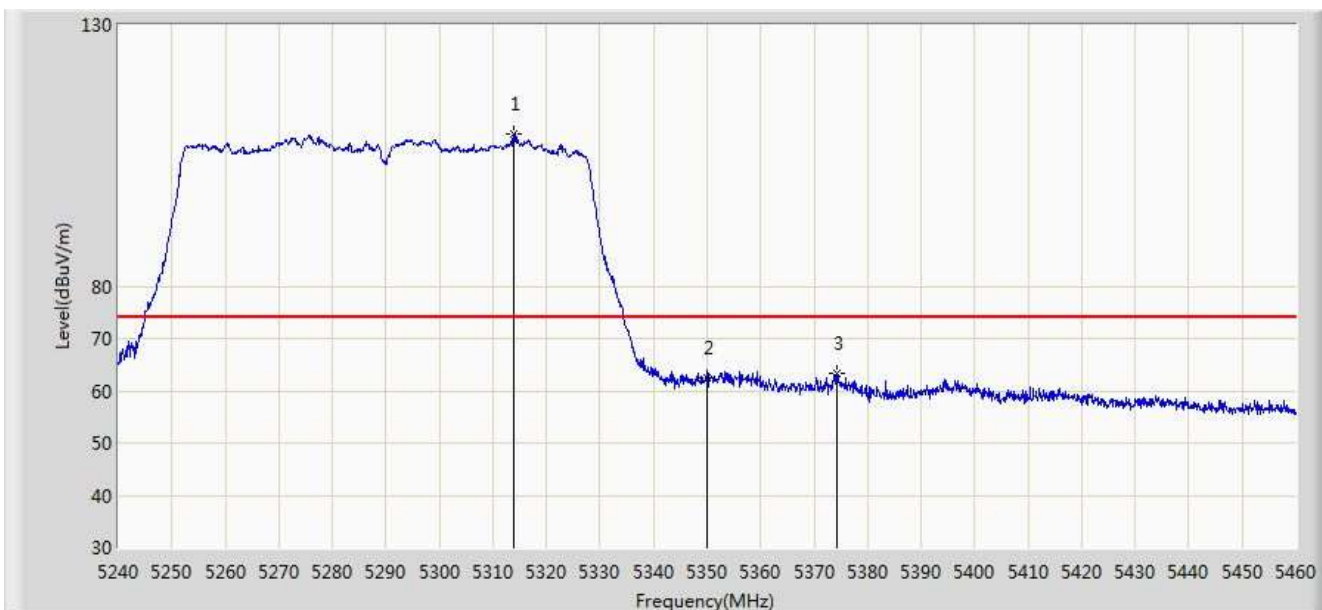


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.920	109.053	105.216	N/A	N/A	3.837	PK
2			5350.000	62.398	58.493	-11.602	74.000	3.904	PK
3			5374.310	63.466	59.517	-10.534	74.000	3.950	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

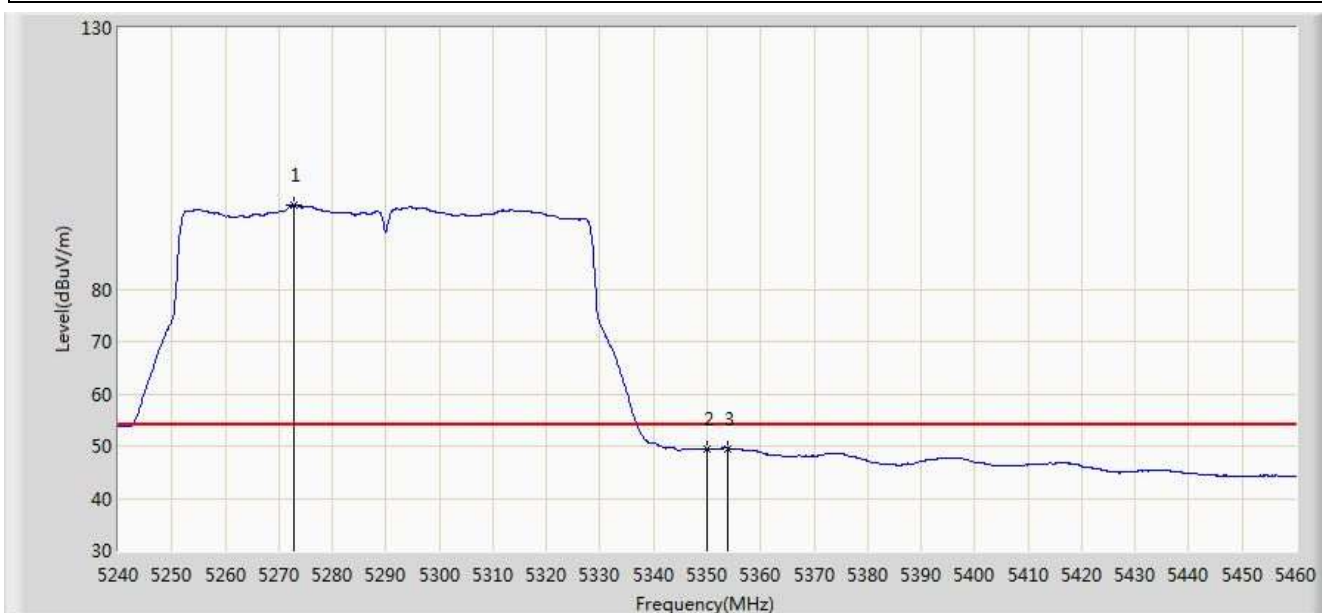


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5272.780	96.140	92.307	N/A	N/A	3.833	AV
2			5350.000	49.388	45.483	-4.612	54.000	3.904	AV
3			5353.850	49.547	45.635	-4.453	54.000	3.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

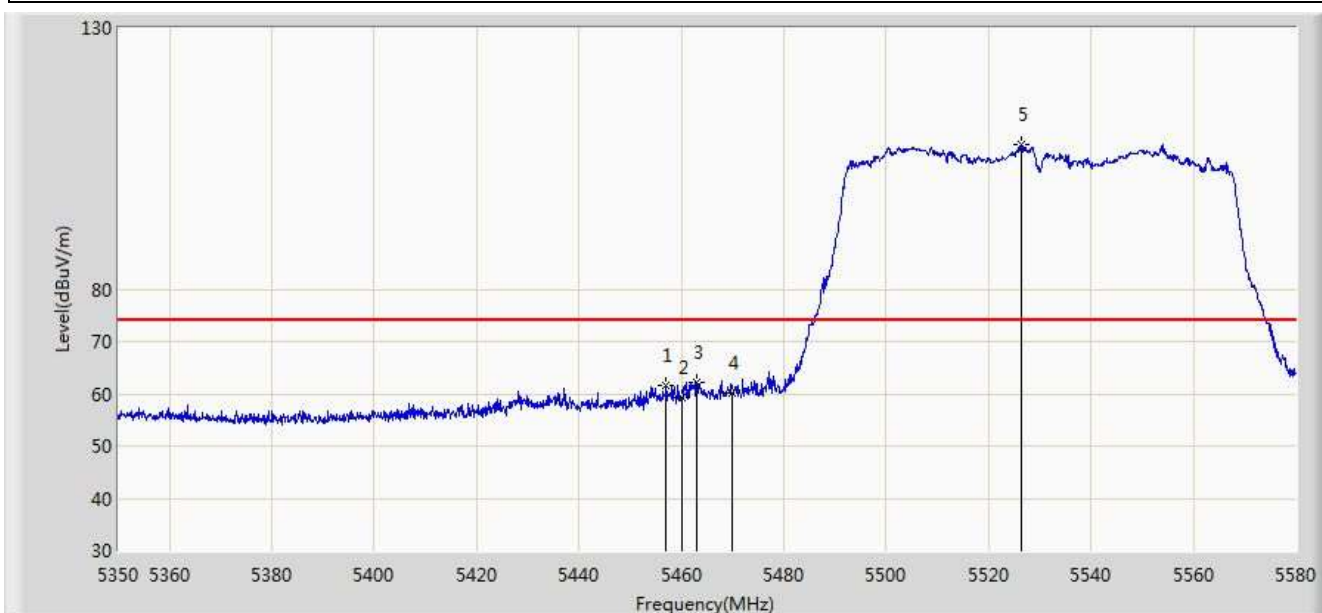


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.065	61.575	57.401	-12.425	74.000	4.174	PK
2			5460.000	59.363	55.183	-14.637	74.000	4.180	PK
3			5463.045	62.199	58.012	-11.801	74.000	4.187	PK
4			5470.000	60.238	56.036	-13.762	74.000	4.202	PK
5		*	5526.525	107.748	103.397	N/A	N/A	4.351	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

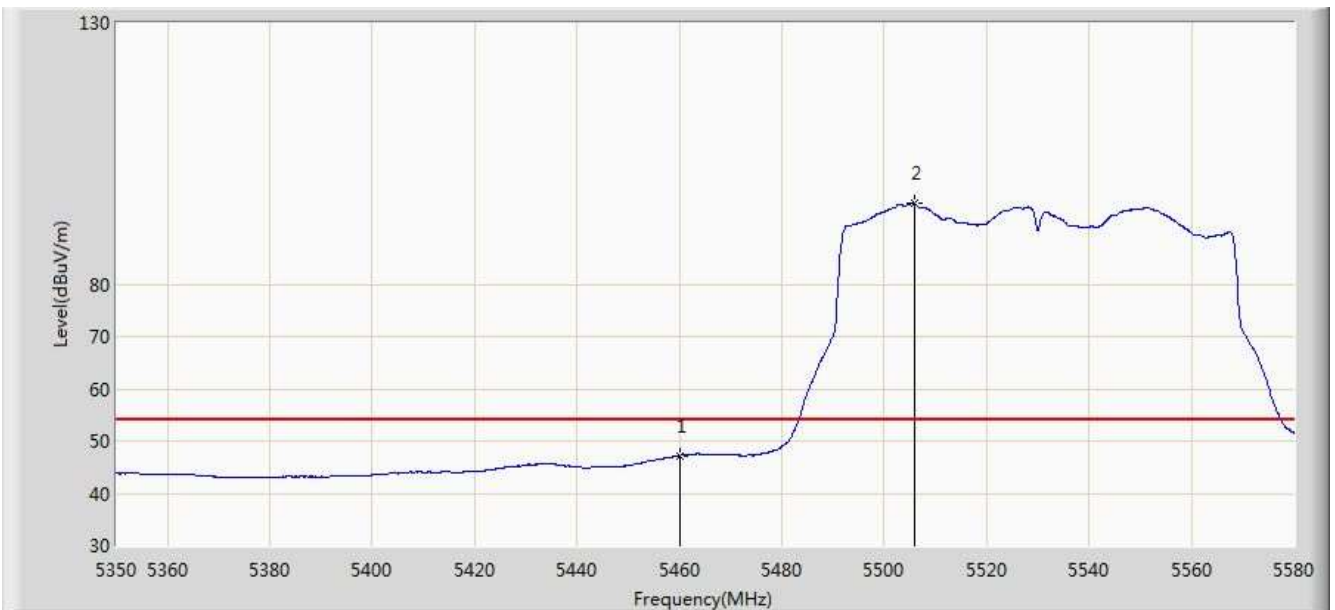


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.143	42.963	-6.857	54.000	4.180	AV
2		*	5505.825	95.377	91.088	N/A	N/A	4.289	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

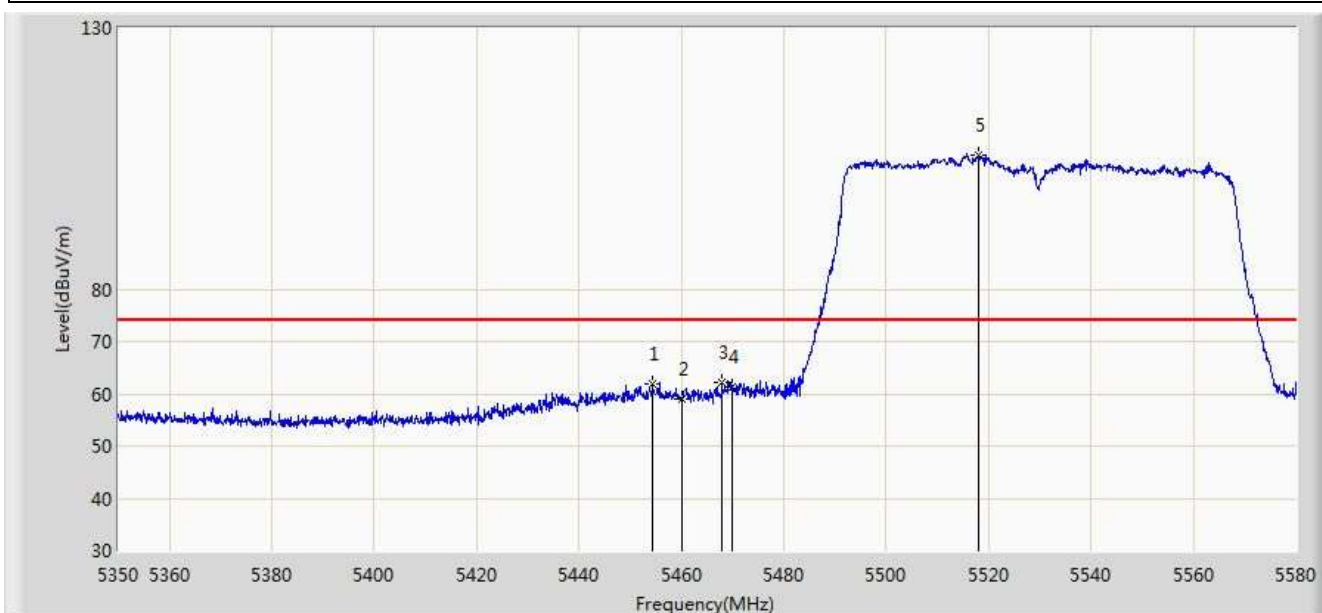


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.420	61.998	57.830	-12.002	74.000	4.168	PK
2			5460.000	58.924	54.744	-15.076	74.000	4.180	PK
3			5467.875	62.276	58.078	-11.724	74.000	4.198	PK
4			5470.000	61.228	57.026	-12.772	74.000	4.202	PK
5		*	5518.015	105.655	101.330	N/A	N/A	4.325	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 04:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

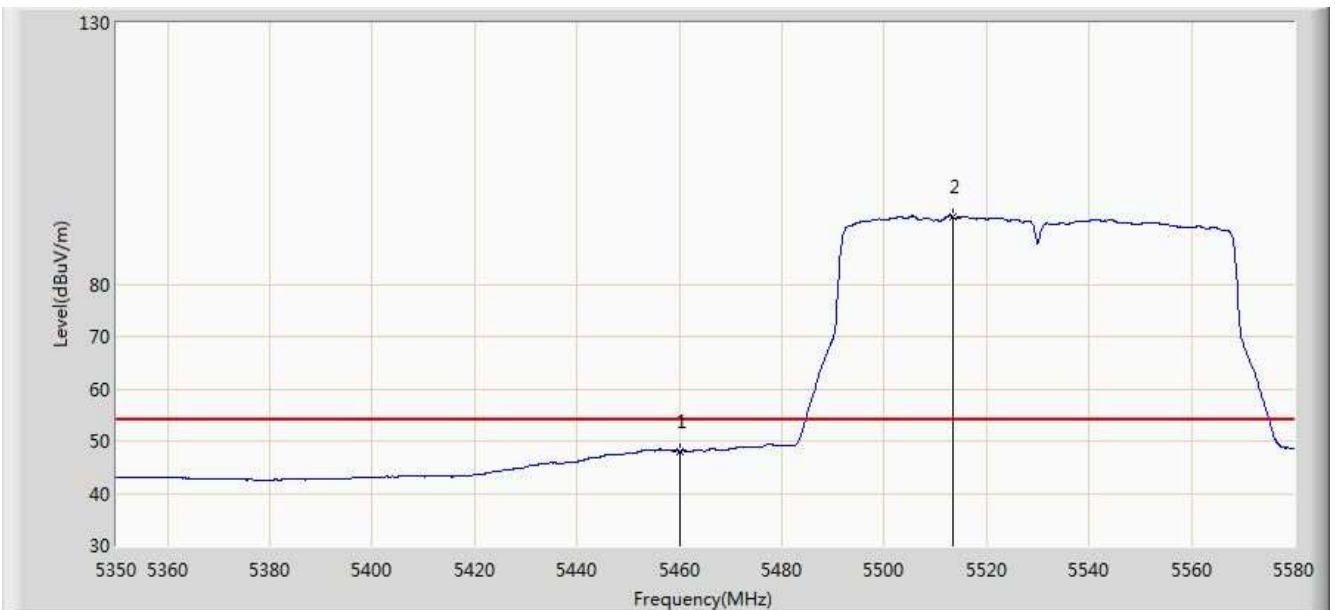


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.067	43.887	-5.933	54.000	4.180	AV
2		*	5513.300	92.986	88.675	N/A	N/A	4.310	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 05:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

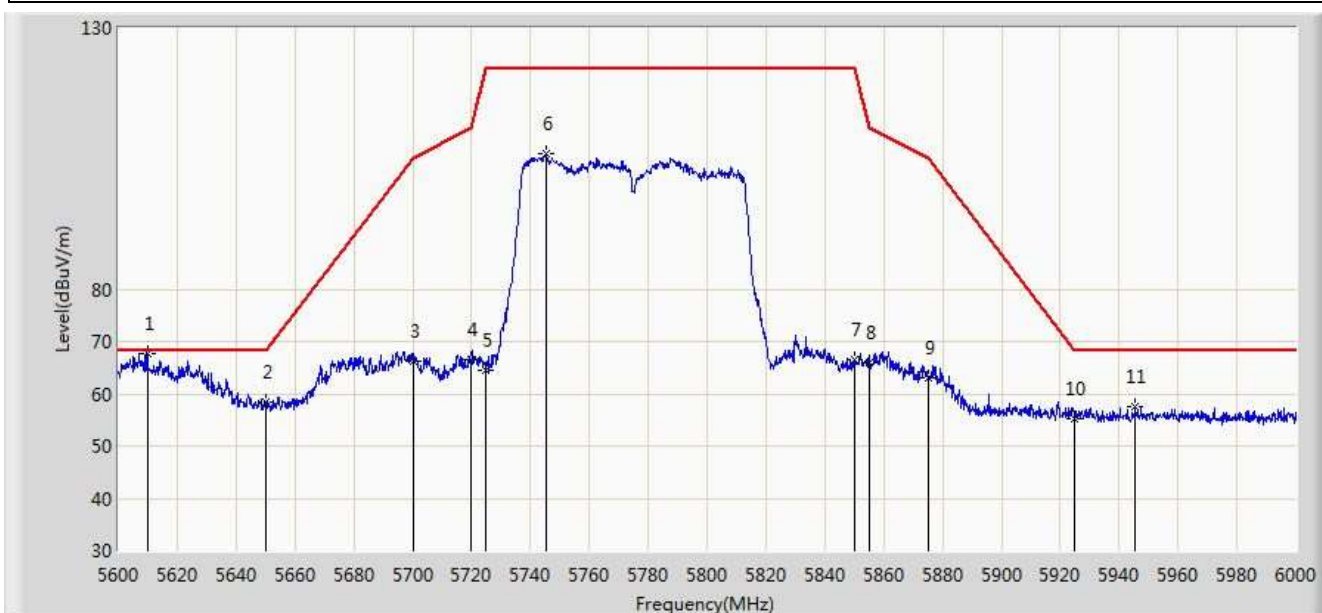


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5610.000	67.710	63.158	-0.490	68.200	4.552	PK
2			5650.000	58.361	53.690	-9.839	68.200	4.671	PK
3			5700.000	66.105	61.227	-39.095	105.200	4.878	PK
4			5720.000	66.472	61.475	-44.328	110.800	4.997	PK
5			5725.000	64.404	59.375	-57.796	122.200	5.029	PK
6			5745.200	105.837	100.681	N/A	N/A	5.156	PK
7			5850.000	66.505	60.779	-55.695	122.200	5.726	PK
8			5855.000	66.086	60.340	-44.714	110.800	5.746	PK
9			5875.000	63.040	57.220	-42.160	105.200	5.820	PK
10			5925.000	55.213	49.247	-12.987	68.200	5.967	PK
11			5945.400	57.585	51.569	-10.615	68.200	6.016	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 05:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

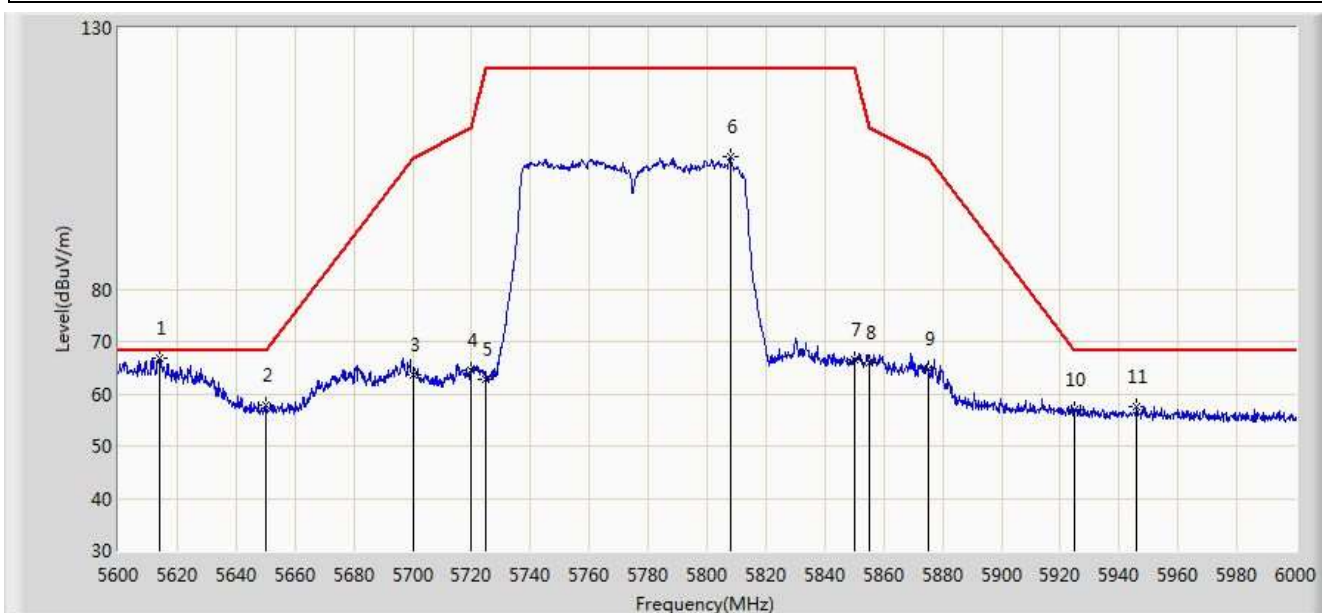

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5614.000	66.856	62.293	-1.344	68.200	4.563	PK
2			5650.000	57.723	53.052	-10.477	68.200	4.671	PK
3			5700.000	63.619	58.741	-41.581	105.200	4.878	PK
4			5720.000	64.473	59.476	-46.327	110.800	4.997	PK
5			5725.000	62.836	57.807	-59.364	122.200	5.029	PK
6			5807.800	105.316	99.828	N/A	N/A	5.489	PK
7			5850.000	66.512	60.786	-55.688	122.200	5.726	PK
8			5855.000	65.908	60.162	-44.892	110.800	5.746	PK
9			5875.000	64.655	58.835	-40.545	105.200	5.820	PK
10			5925.000	56.832	50.866	-11.368	68.200	5.967	PK
11			5946.000	57.536	51.518	-10.664	68.200	6.018	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/11/07 - 22:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Snake Ni
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5210MHz+5290MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.500	58.932	54.758	-15.068	74.000	4.173	PK
2			5150.000	58.275	54.106	-15.725	74.000	4.170	PK
3		*	5229.875	103.994	100.084	N/A	N/A	3.909	PK
4			5350.000	56.039	52.134	-17.961	74.000	3.904	PK
5			5356.925	58.220	54.303	-15.780	74.000	3.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2017/11/07 - 22:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Snake Ni
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5210MHz+5290MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.819	41.650	-8.181	54.000	4.170	AV
2		*	5229.000	93.941	90.029	N/A	N/A	3.912	AV
3			5350.000	44.726	40.821	-9.274	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2017/11/07 - 22:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Snake Ni
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5210MHz+5290MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

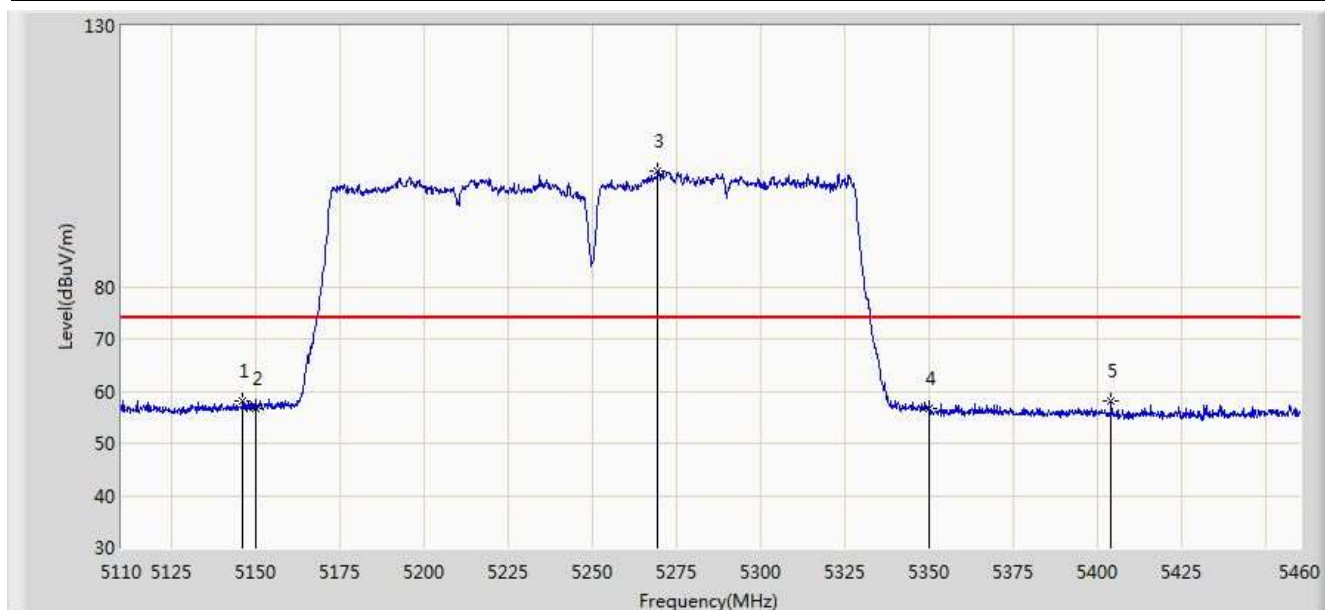


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.050	58.169	53.993	-15.831	74.000	4.175	PK
2			5150.000	56.752	52.583	-17.248	74.000	4.170	PK
3		*	5269.425	102.270	98.435	N/A	N/A	3.835	PK
4			5350.000	56.691	52.786	-17.309	74.000	3.904	PK
5			5404.000	58.254	54.243	-15.746	74.000	4.010	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2017/11/07 - 22:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Snake Ni
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5210MHz+5290MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

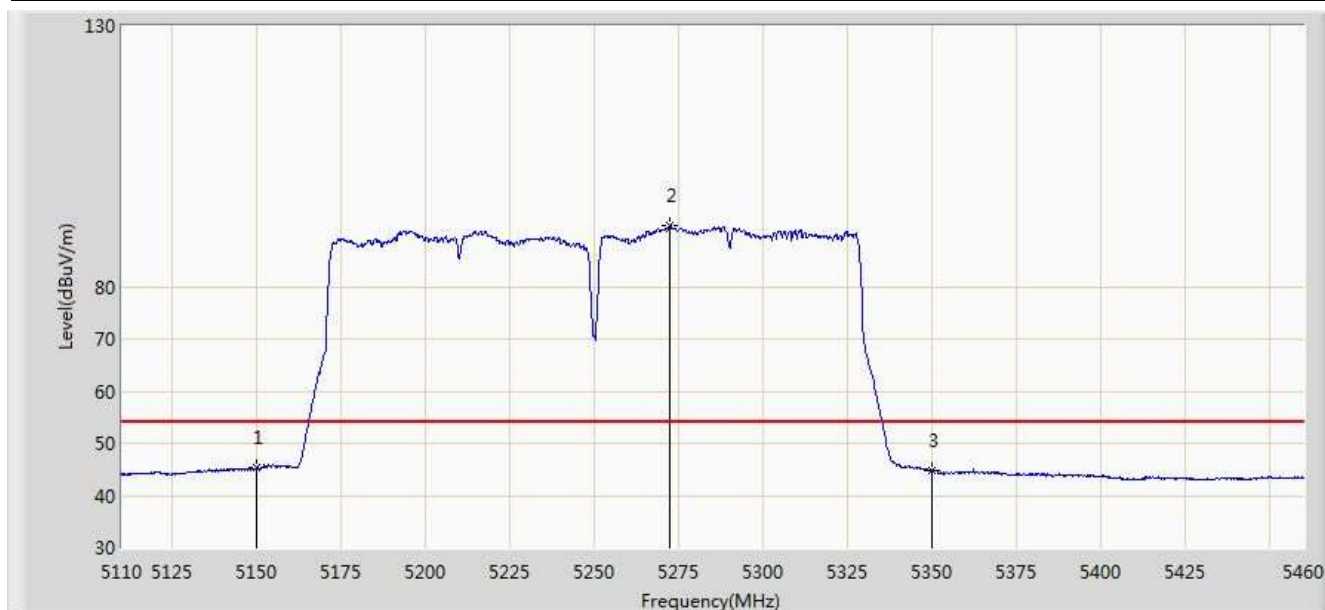


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.287	41.118	-8.713	54.000	4.170	AV
2		*	5272.225	91.732	87.899	N/A	N/A	3.834	AV
3			5350.000	44.747	40.842	-9.253	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2017/10/20 - 15:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5530MHz+5610MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

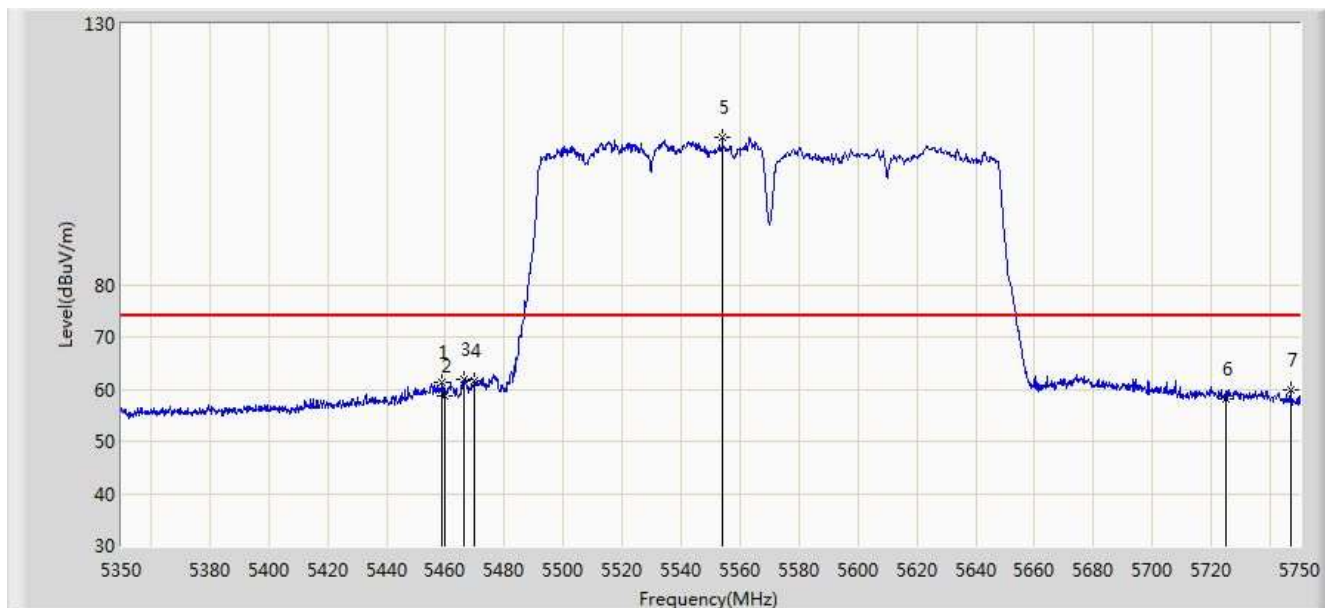


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.800	61.312	57.134	-12.688	74.000	4.178	PK
2			5460.000	58.587	54.407	-15.413	74.000	4.180	PK
3			5466.200	61.933	57.739	-12.067	74.000	4.193	PK
4			5470.000	61.457	57.255	-12.543	74.000	4.202	PK
5		*	5554.000	108.150	103.721	N/A	N/A	4.428	PK
6			5725.000	58.101	53.072	-15.899	74.000	5.029	PK
7			5746.800	59.784	54.619	-14.216	74.000	5.165	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/10/20 - 15:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5530MHz+5610MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

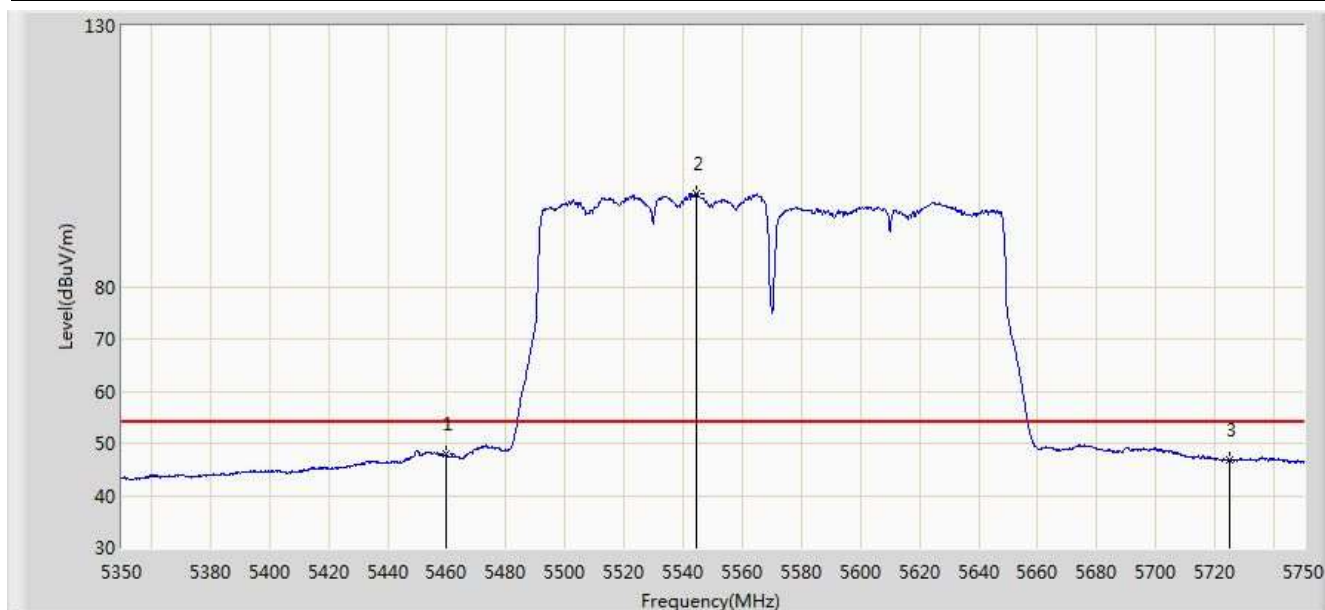


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.893	43.713	-6.107	54.000	4.180	AV
2		*	5544.600	97.880	93.477	N/A	N/A	4.403	AV
3			5725.000	46.716	41.687	-7.284	54.000	5.029	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/10/20 - 15:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5530MHz+5610MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

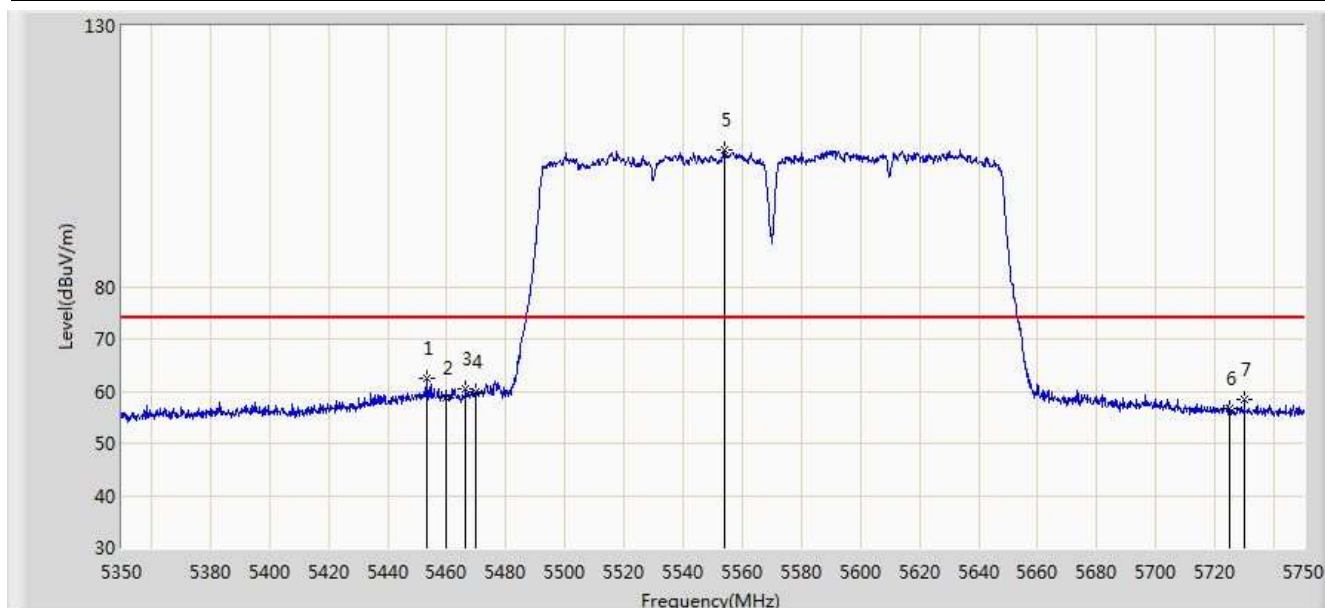


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.200	62.396	58.231	-11.604	74.000	4.164	PK
2			5460.000	58.742	54.562	-15.258	74.000	4.180	PK
3			5466.400	60.512	56.318	-13.488	74.000	4.194	PK
4			5470.000	59.765	55.563	-14.235	74.000	4.202	PK
5		*	5554.000	106.224	101.795	N/A	N/A	4.428	PK
6			5725.000	56.609	51.580	-17.391	74.000	5.029	PK
7			5730.000	58.479	53.418	-15.521	74.000	5.061	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/10/20 - 15:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 Contiguous at Channel 5530MHz+5610MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

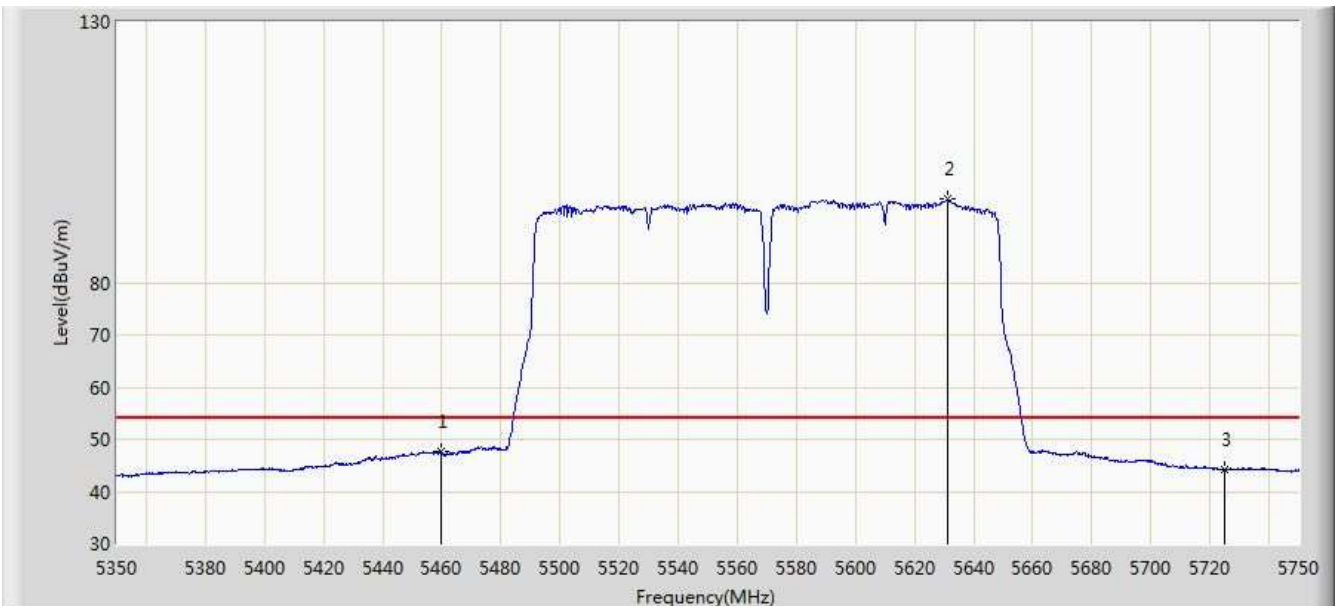


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.622	43.442	-6.378	54.000	4.180	AV
2		*	5631.000	95.980	91.368	N/A	N/A	4.612	AV
3			5725.000	44.089	39.060	-9.911	54.000	5.029	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 16:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

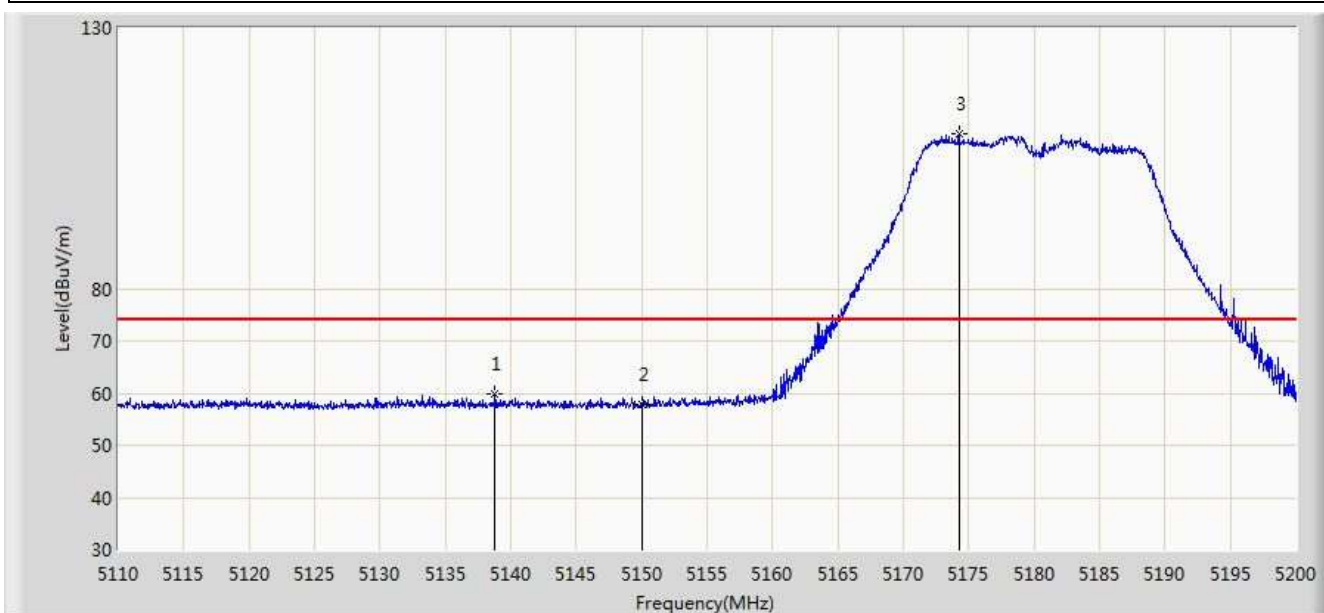


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.800	59.757	55.582	-14.243	74.000	4.175	PK
2			5150.000	57.684	53.515	-16.316	74.000	4.170	PK
3		*	5174.260	109.715	105.626	N/A	N/A	4.088	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

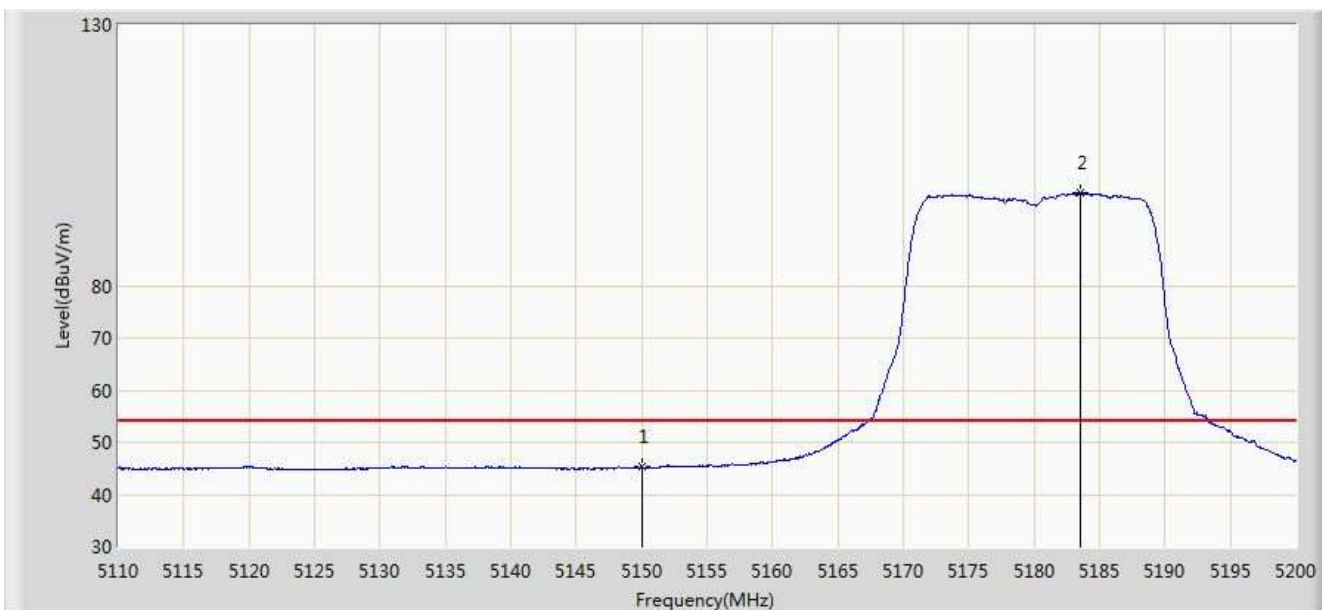


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.223	41.054	-8.777	54.000	4.170	AV
2		*	5183.575	97.907	93.851	N/A	N/A	4.057	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

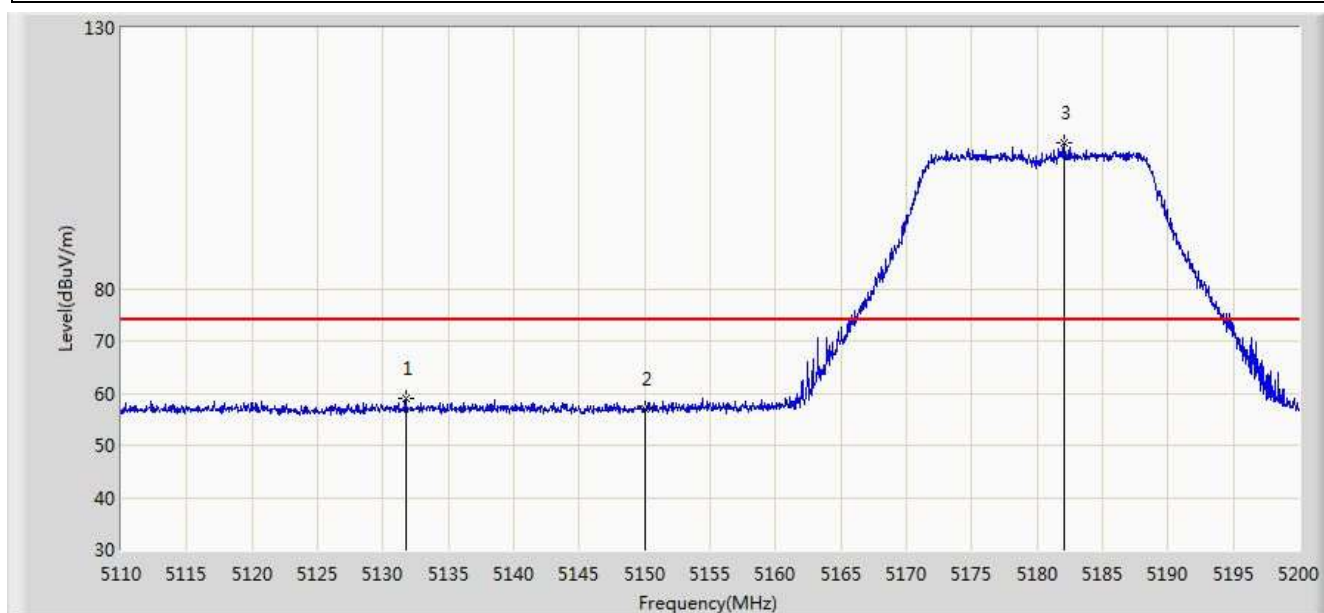


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.735	58.931	54.756	-15.069	74.000	4.174	PK
2			5150.000	56.813	52.644	-17.187	74.000	4.170	PK
3		*	5182.045	108.111	104.049	N/A	N/A	4.061	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

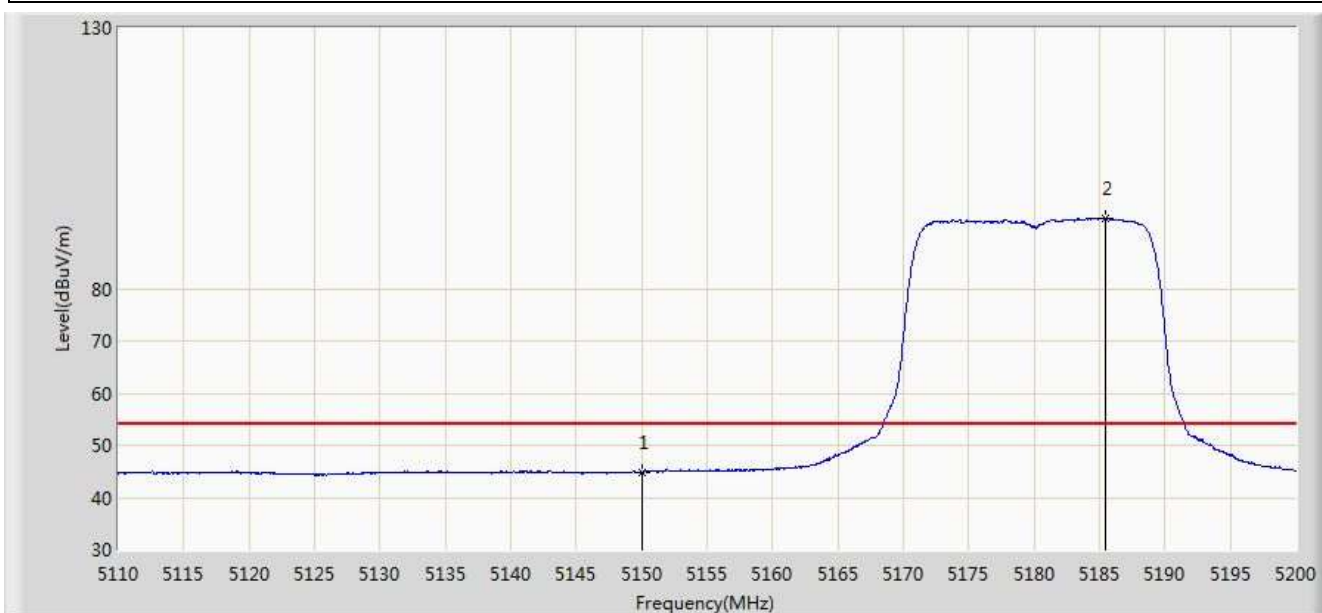


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.849	40.680	-9.151	54.000	4.170	AV
2		*	5185.465	93.513	89.463	N/A	N/A	4.049	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

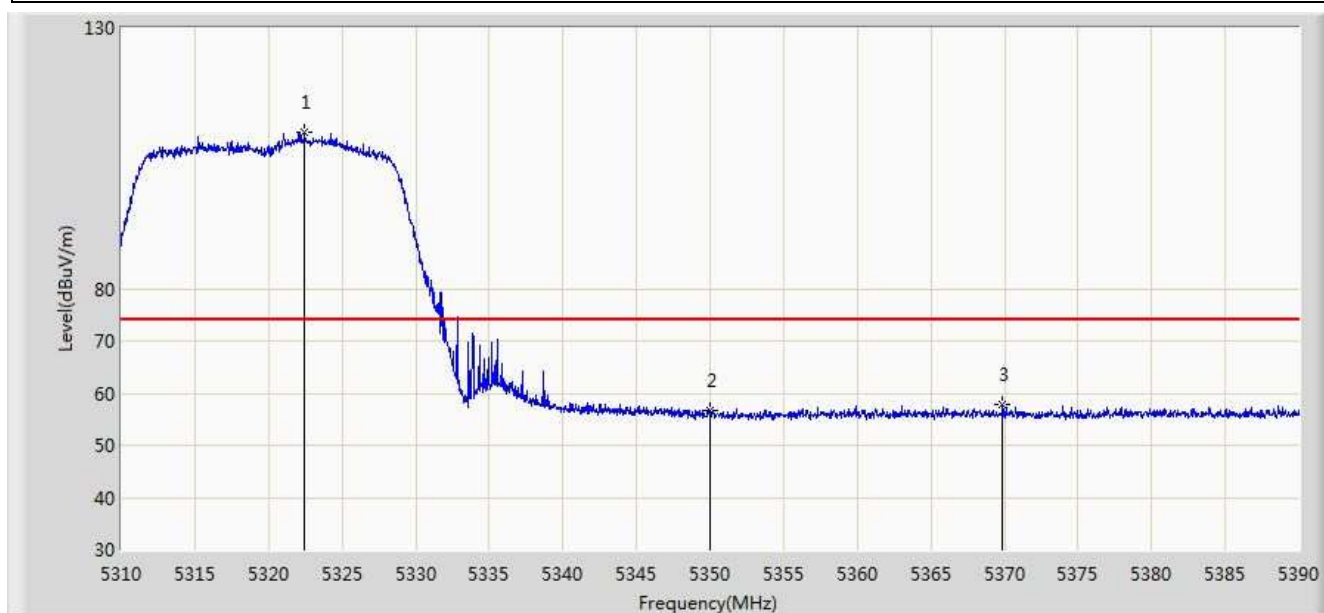


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.480	110.025	106.172	N/A	N/A	3.853	PK
2			5350.000	56.780	52.875	-17.220	74.000	3.904	PK
3			5369.880	57.908	53.967	-16.092	74.000	3.941	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

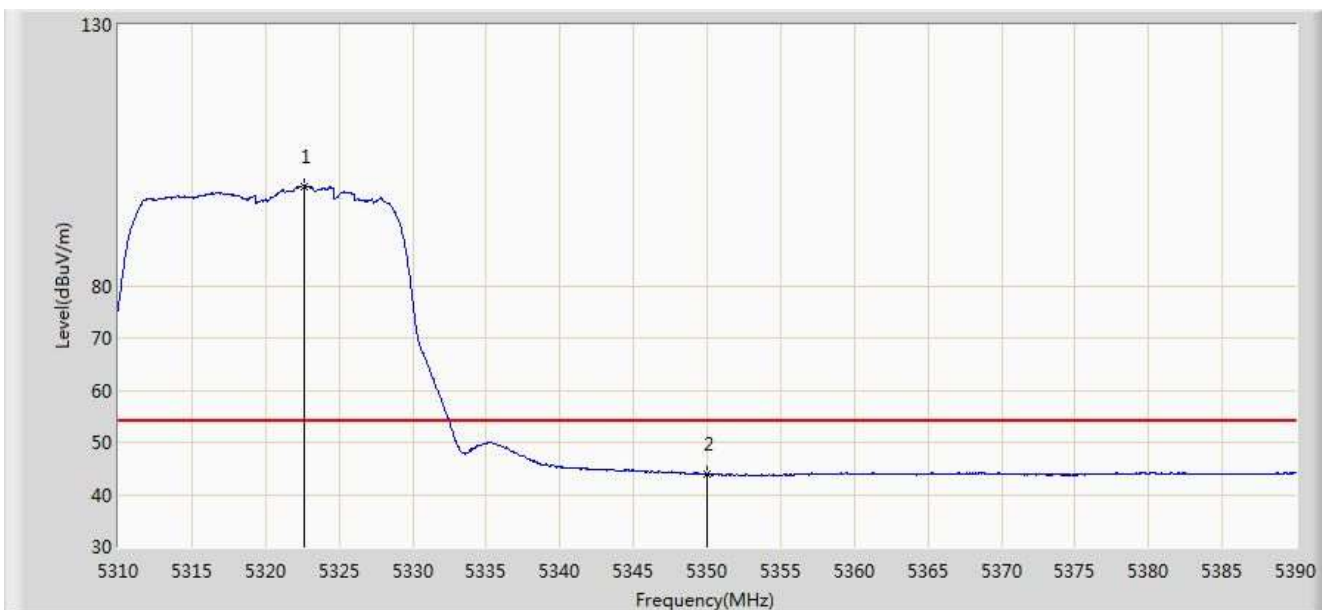


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.640	99.100	95.246	N/A	N/A	3.853	AV
2			5350.000	43.882	39.977	-10.118	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

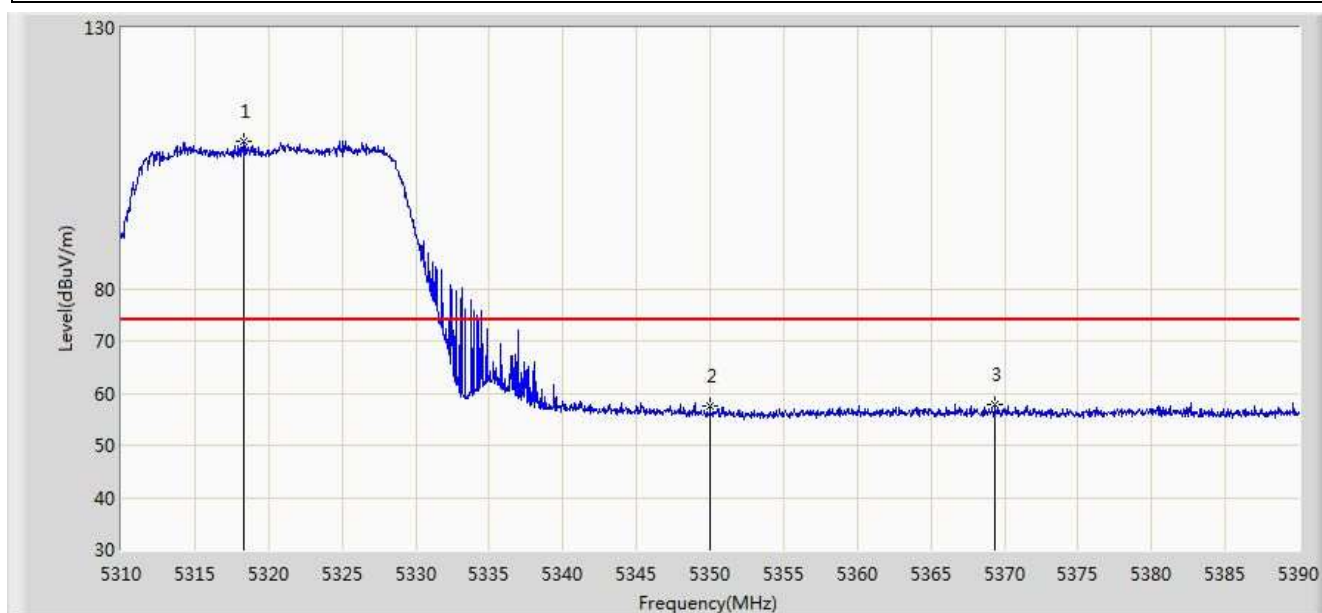


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.360	108.338	104.493	N/A	N/A	3.845	PK
2			5350.000	57.449	53.544	-16.551	74.000	3.904	PK
3			5369.360	57.841	53.901	-16.159	74.000	3.940	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

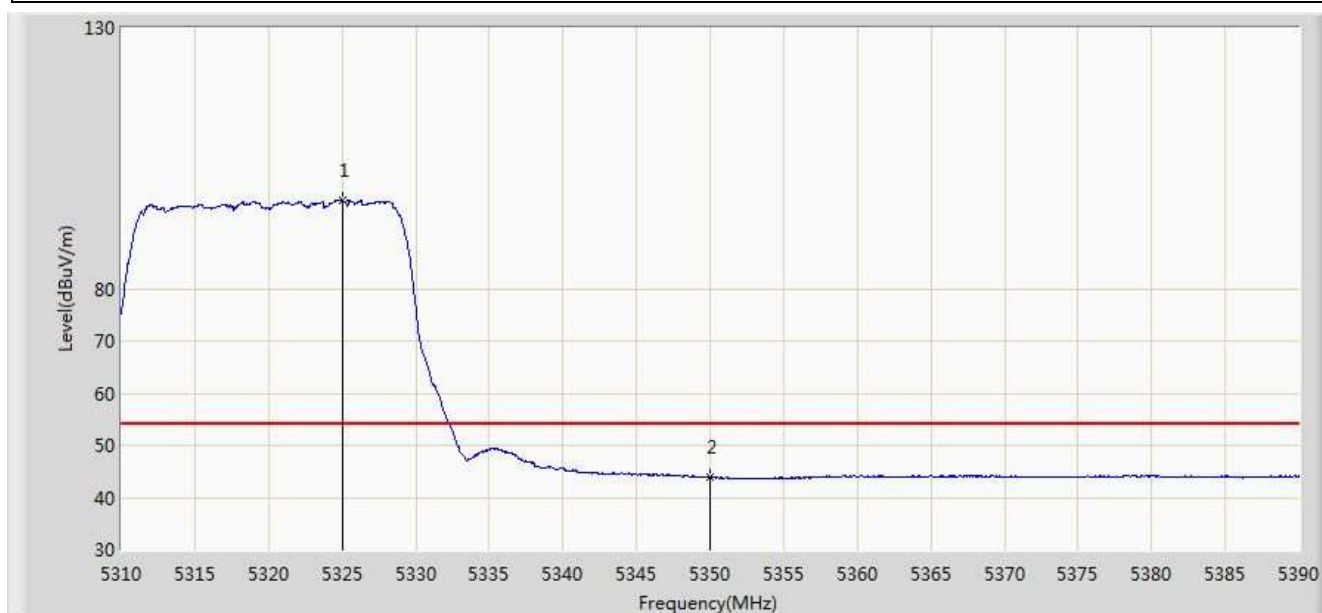


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.000	96.998	93.140	N/A	N/A	3.858	AV
2			5350.000	43.870	39.965	-10.130	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

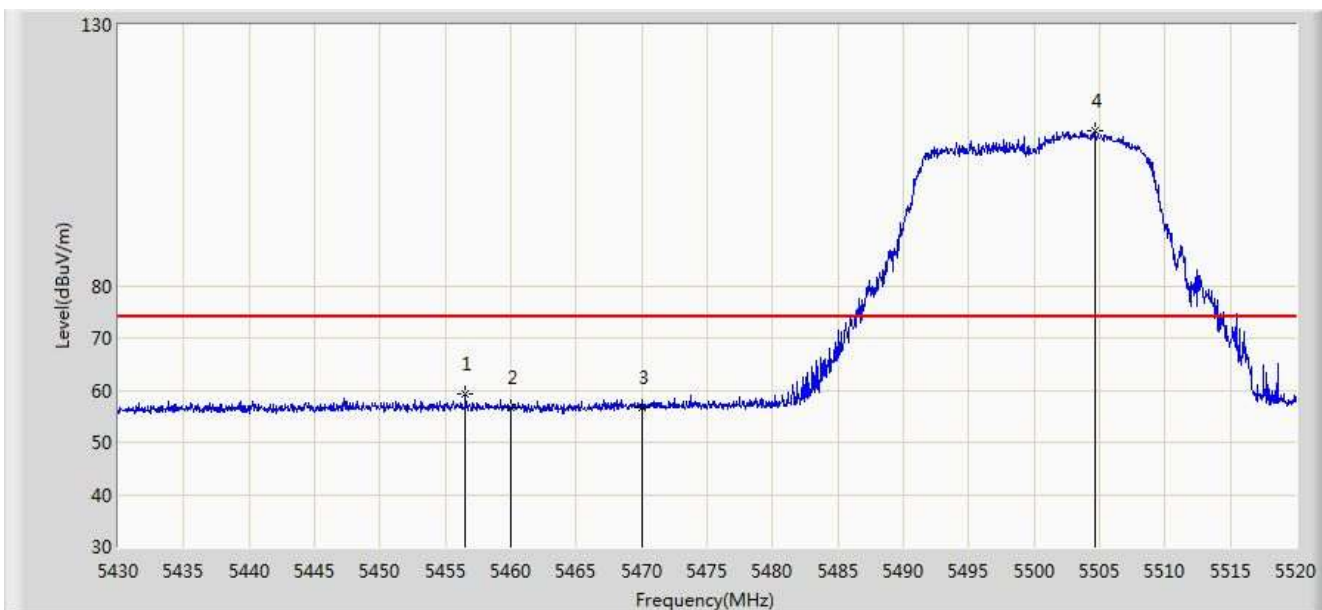


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.550	59.236	55.063	-14.764	74.000	4.173	PK
2			5460.000	56.551	52.371	-17.449	74.000	4.180	PK
3			5470.000	56.540	52.338	-17.460	74.000	4.202	PK
4		*	5504.655	109.807	105.521	N/A	N/A	4.286	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 17:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

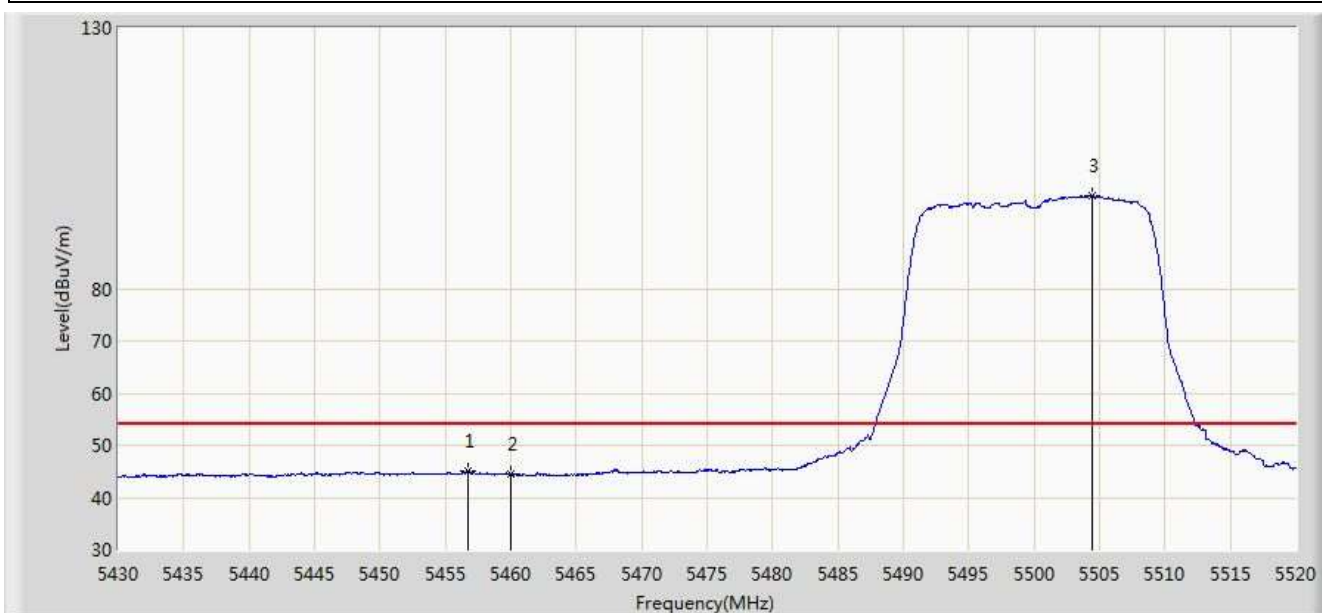


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.730	45.090	40.917	-8.910	54.000	4.173	AV
2			5460.000	44.414	40.234	-9.586	54.000	4.180	AV
3		*	5504.430	97.894	93.609	N/A	N/A	4.285	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

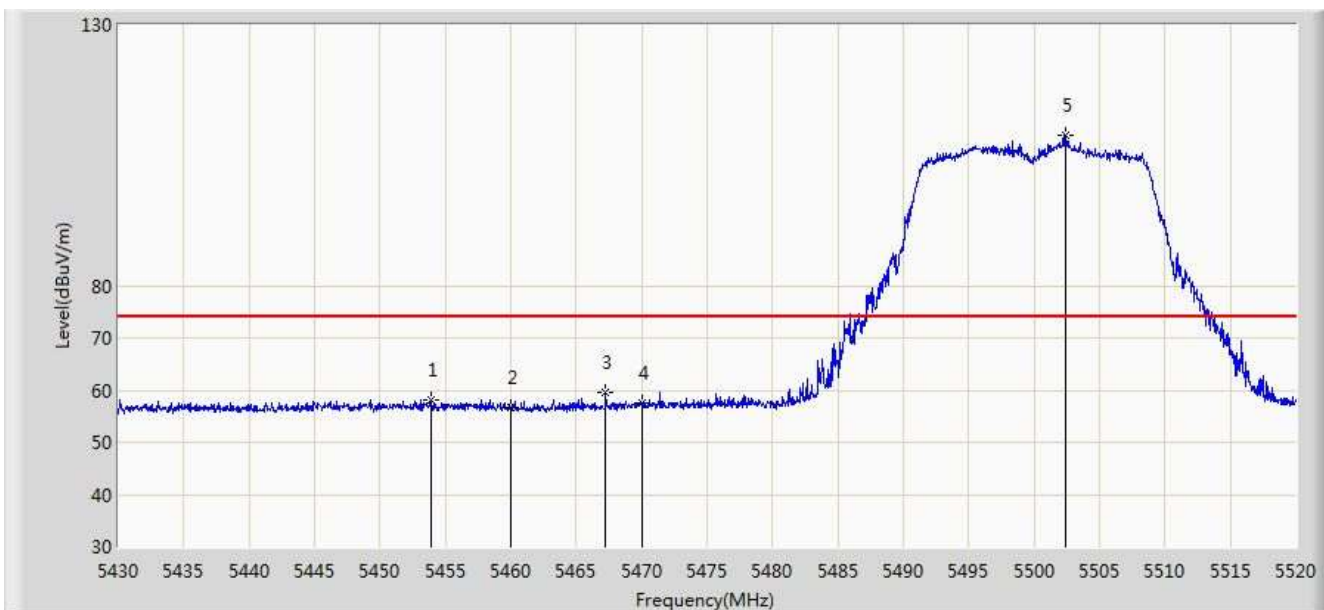


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.940	58.006	53.839	-15.994	74.000	4.168	PK
2			5460.000	56.546	52.366	-17.454	74.000	4.180	PK
3			5467.260	59.502	55.306	-14.498	74.000	4.196	PK
4			5470.000	57.627	53.425	-16.373	74.000	4.202	PK
5		*	5502.450	108.777	104.498	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

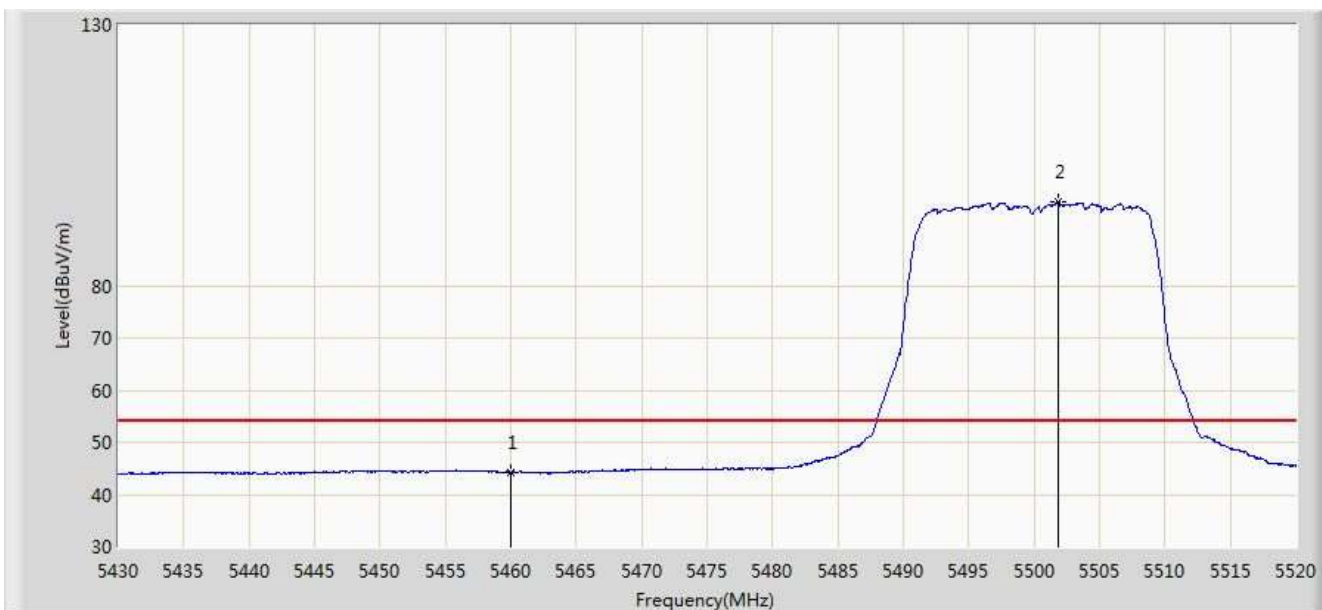


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.254	40.074	-9.746	54.000	4.180	AV
2		*	5501.820	96.016	91.739	N/A	N/A	4.278	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

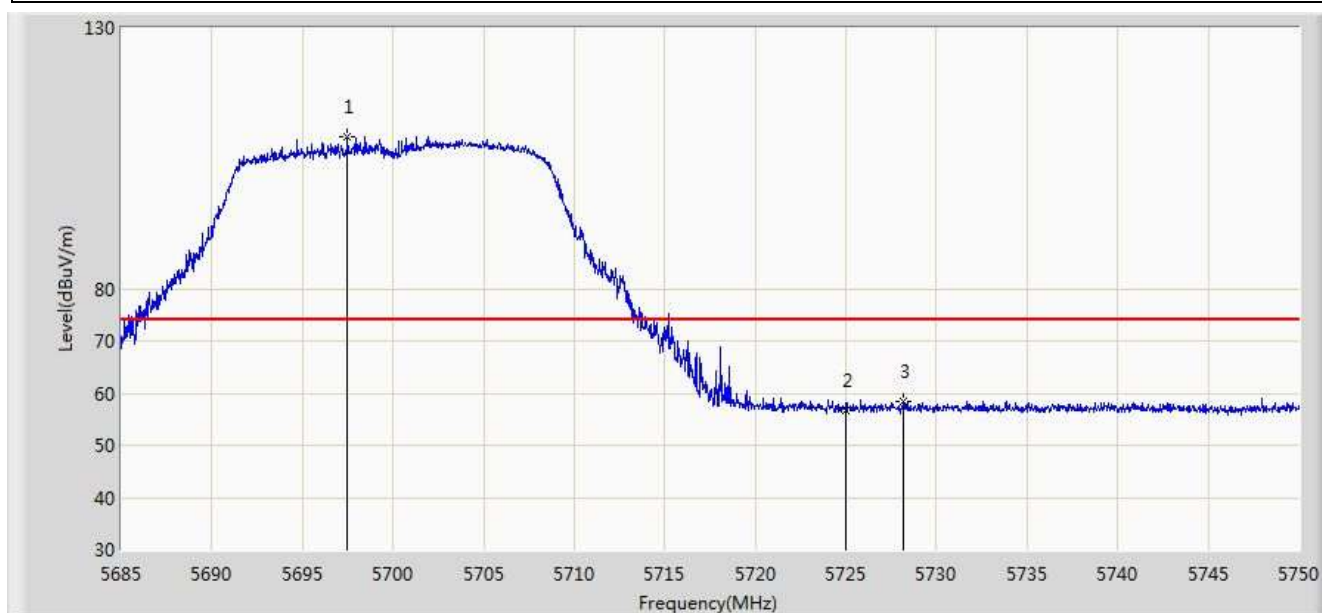


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.480	109.153	104.288	N/A	N/A	4.865	PK
2			5725.000	56.645	51.616	-17.355	74.000	5.029	PK
3			5728.192	58.499	53.450	-15.501	74.000	5.049	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

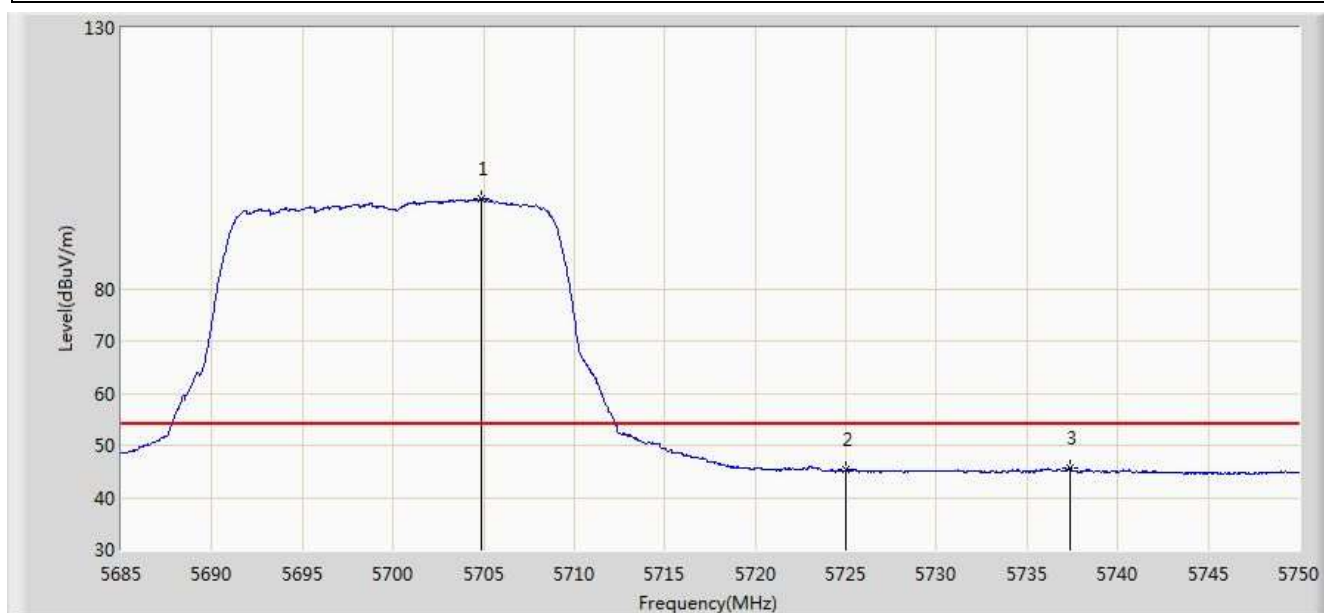


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.857	97.241	92.337	N/A	N/A	4.904	AV
2			5725.000	45.218	40.189	-8.782	54.000	5.029	AV
3			5737.357	45.700	40.592	-8.300	54.000	5.108	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

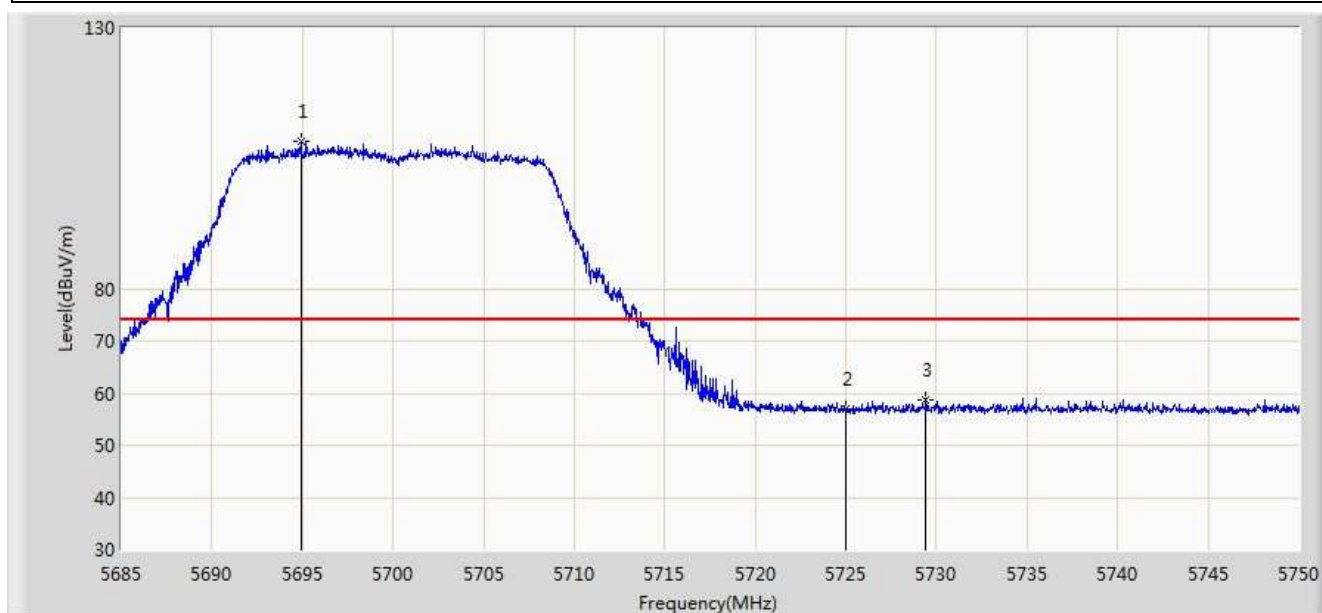


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.913	108.365	103.514	N/A	N/A	4.851	PK
2			5725.000	56.878	51.849	-17.122	74.000	5.029	PK
3			5729.428	58.840	53.783	-15.160	74.000	5.058	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

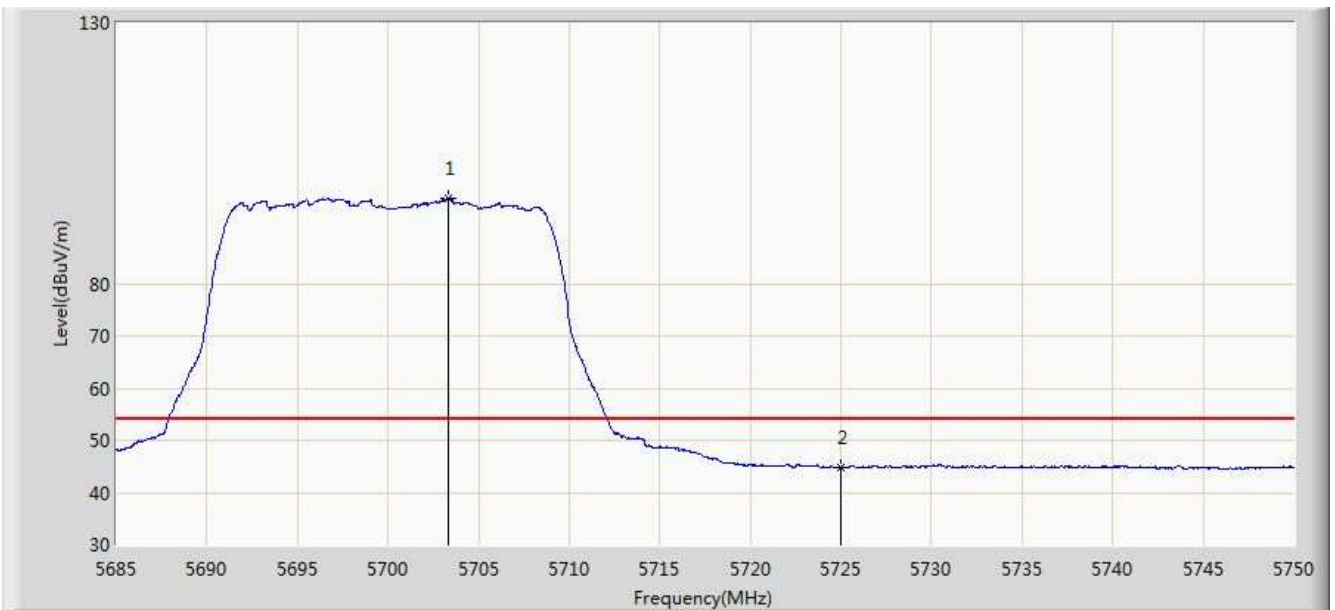


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.330	96.370	91.474	N/A	N/A	4.896	AV
2			5725.000	44.671	39.642	-9.329	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

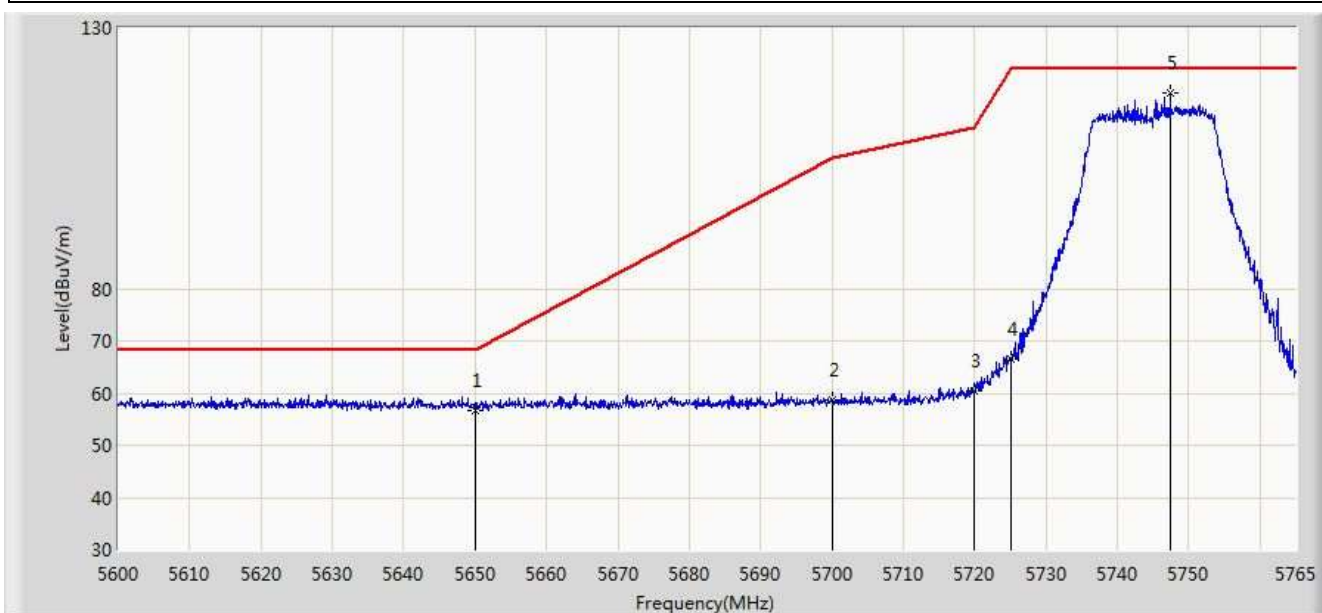


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	56.727	52.056	-11.473	68.200	4.671	PK
2			5700.000	58.716	53.838	-46.484	105.200	4.878	PK
3			5720.000	60.569	55.572	-50.231	110.800	4.997	PK
4			5725.000	66.478	61.449	-55.722	122.200	5.029	PK
5		*	5747.428	117.673	112.504	N/A	N/A	5.169	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

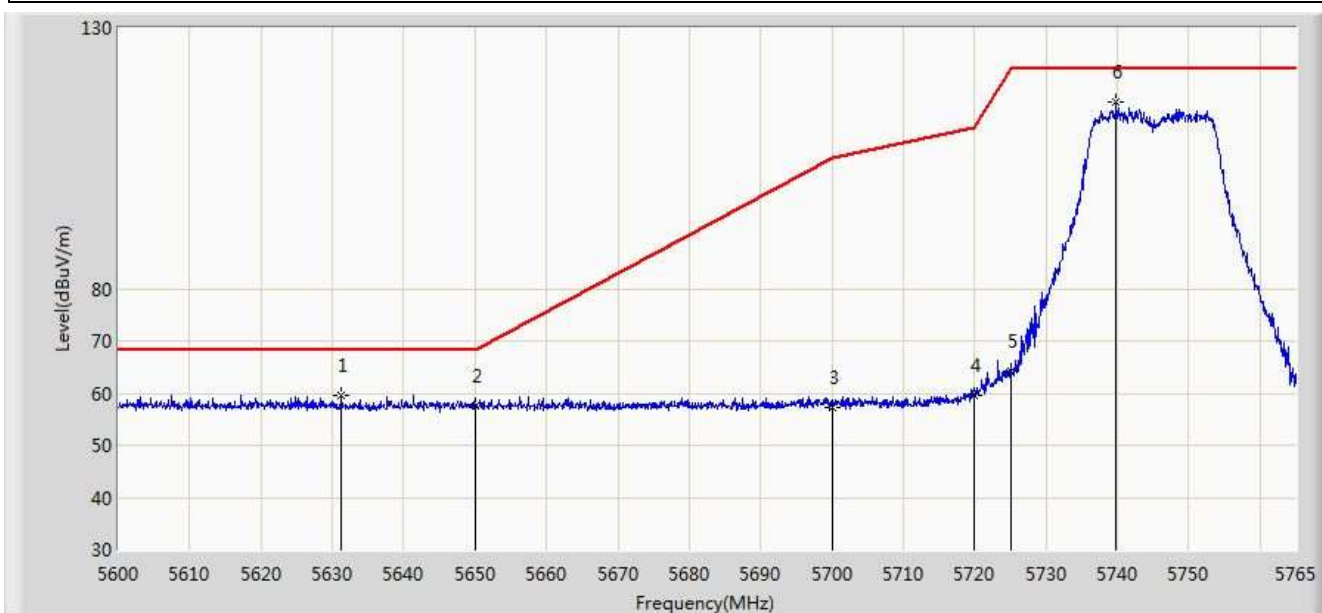


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.268	59.674	55.061	-8.526	68.200	4.613	PK
2			5650.000	57.680	53.009	-10.520	68.200	4.671	PK
3			5700.000	57.319	52.441	-47.881	105.200	4.878	PK
4			5720.000	59.541	54.544	-51.259	110.800	4.997	PK
5			5725.000	64.059	59.030	-58.141	122.200	5.029	PK
6		*	5739.837	115.696	110.572	N/A	N/A	5.123	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

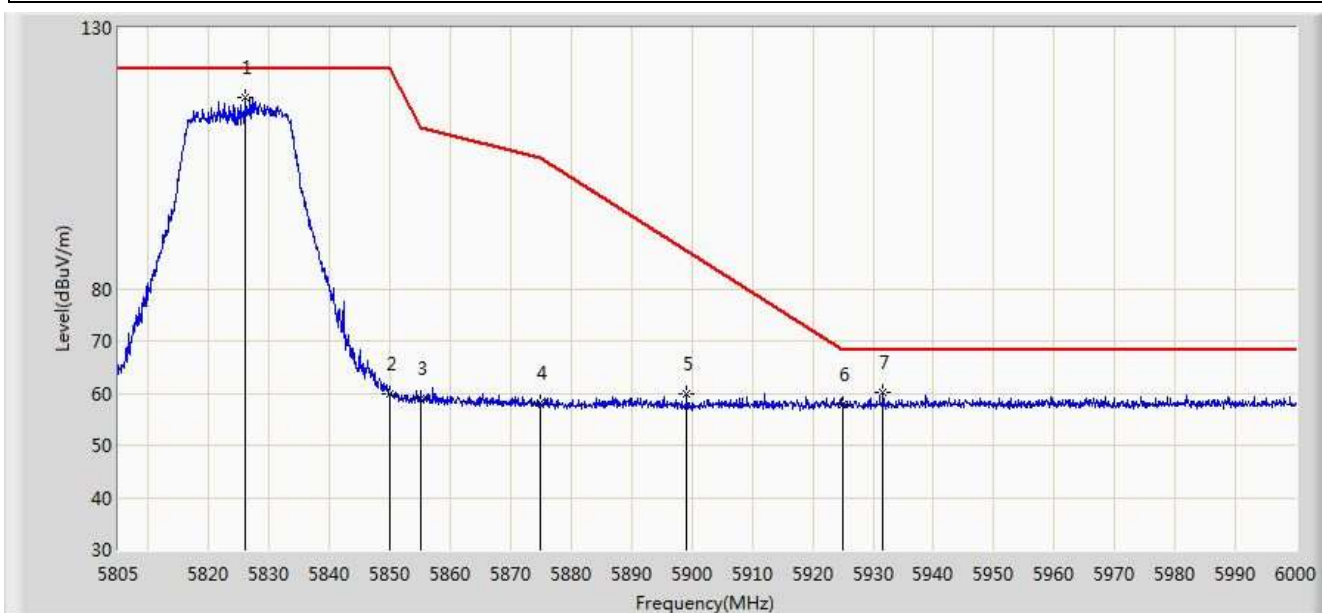


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5825.962	116.573	110.979	N/A	N/A	5.594	PK
2			5850.000	59.757	54.031	-62.443	122.200	5.726	PK
3			5855.000	59.040	53.294	-51.760	110.800	5.746	PK
4			5875.000	58.004	52.184	-47.196	105.200	5.820	PK
5			5899.185	59.794	53.893	-27.470	87.264	5.901	PK
6			5925.000	57.689	51.723	-10.511	68.200	5.967	PK
7			5931.652	60.104	54.121	-8.096	68.200	5.983	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

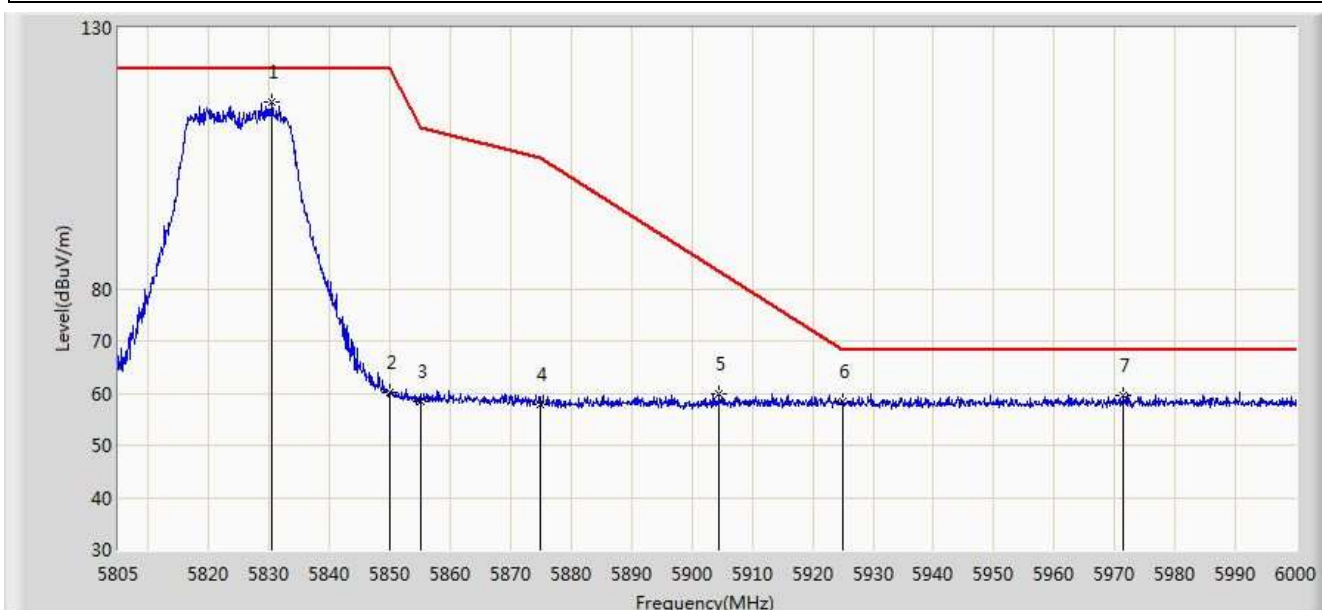


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.447	115.681	110.061	N/A	N/A	5.620	PK
2			5850.000	60.072	54.346	-62.128	122.200	5.726	PK
3			5855.000	58.498	52.752	-52.302	110.800	5.746	PK
4			5875.000	57.957	52.137	-47.243	105.200	5.820	PK
5			5904.547	59.891	53.976	-23.406	83.297	5.915	PK
6			5925.000	58.333	52.367	-9.867	68.200	5.967	PK
7			5971.530	59.672	53.609	-8.528	68.200	6.063	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

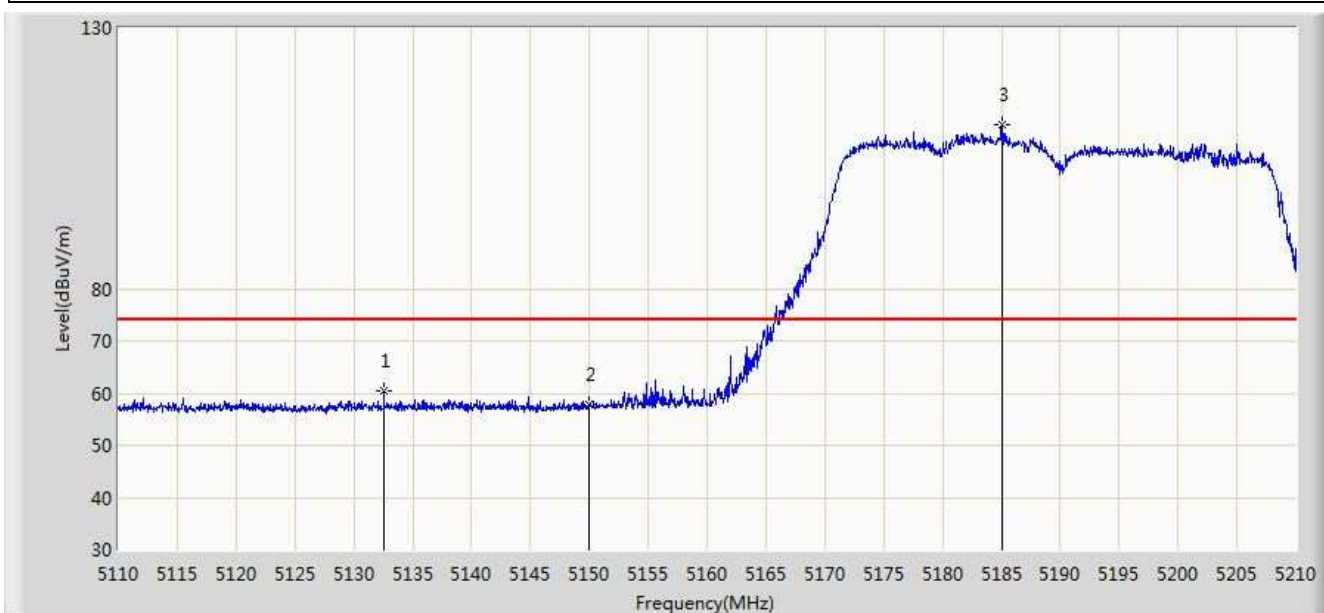


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.550	60.302	56.127	-13.698	74.000	4.175	PK
2			5150.000	57.899	53.730	-16.101	74.000	4.170	PK
3		*	5185.000	111.453	107.402	N/A	N/A	4.052	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

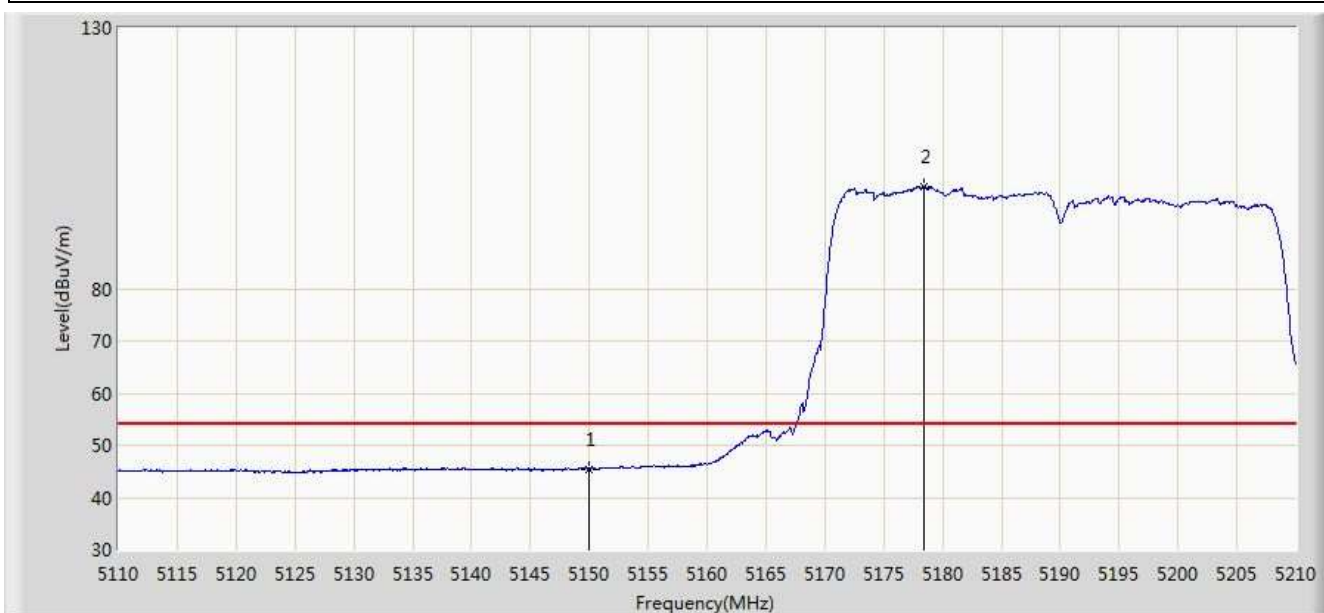


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.482	41.313	-8.518	54.000	4.170	AV
2		*	5178.400	99.552	95.477	N/A	N/A	4.074	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

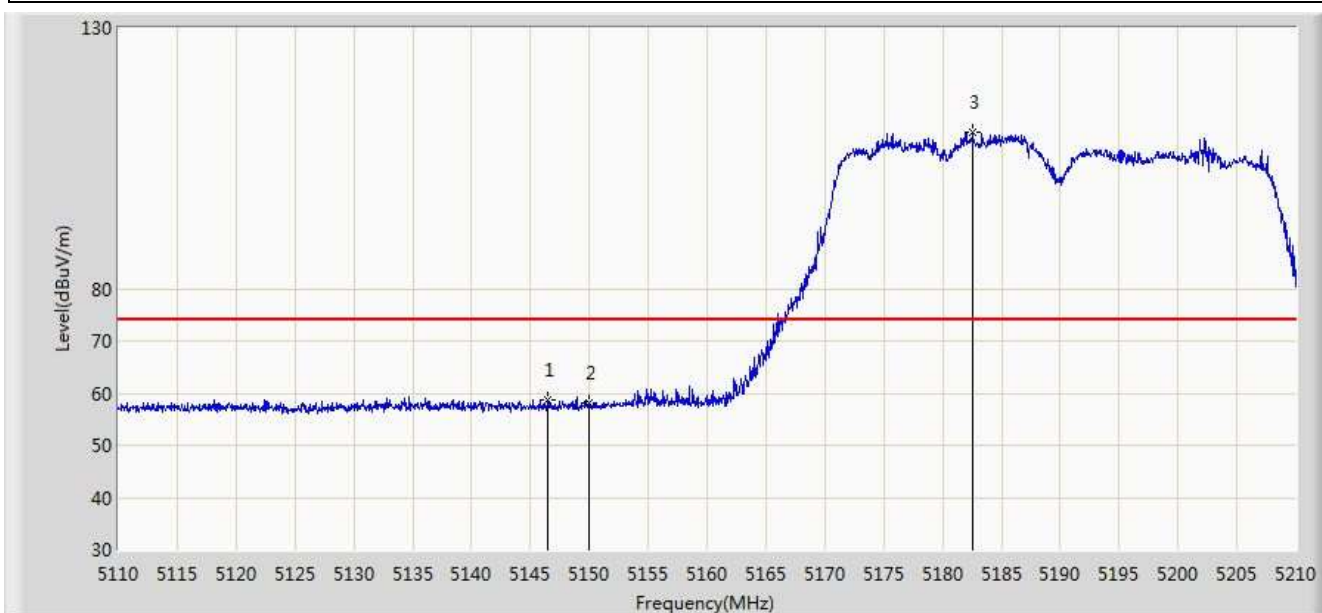


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.500	58.786	54.610	-15.214	74.000	4.176	PK
2			5150.000	58.045	53.876	-15.955	74.000	4.170	PK
3		*	5182.550	110.139	106.079	N/A	N/A	4.060	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

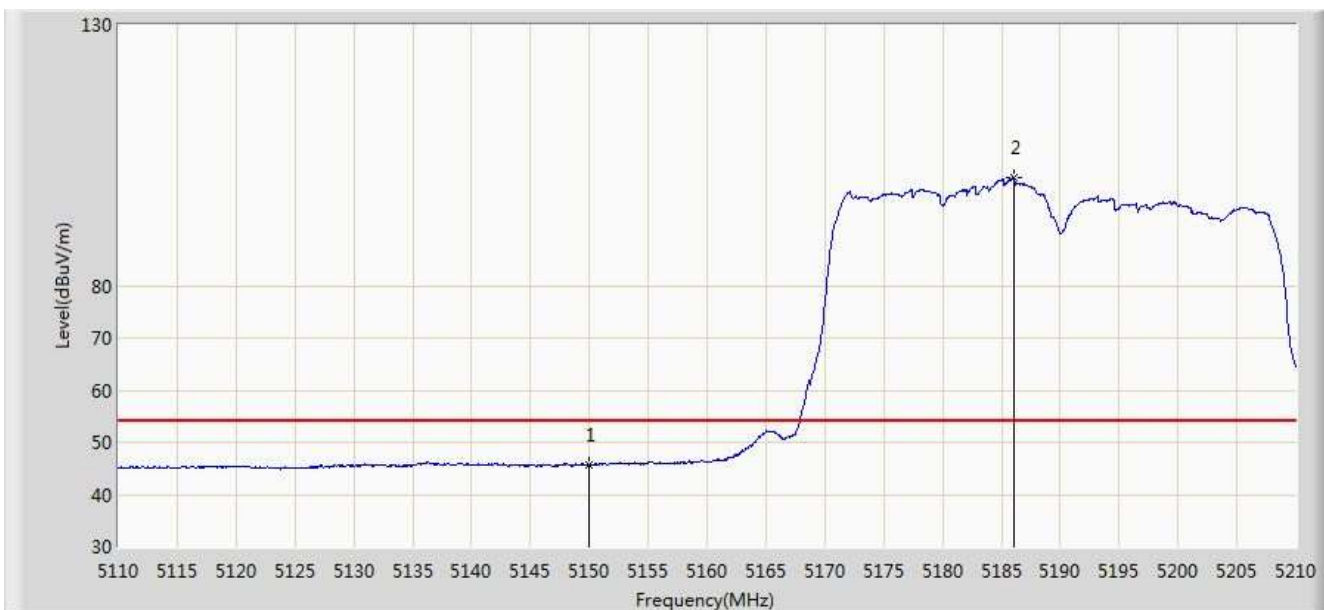


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.792	41.623	-8.208	54.000	4.170	AV
2		*	5186.050	100.709	96.662	N/A	N/A	4.048	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

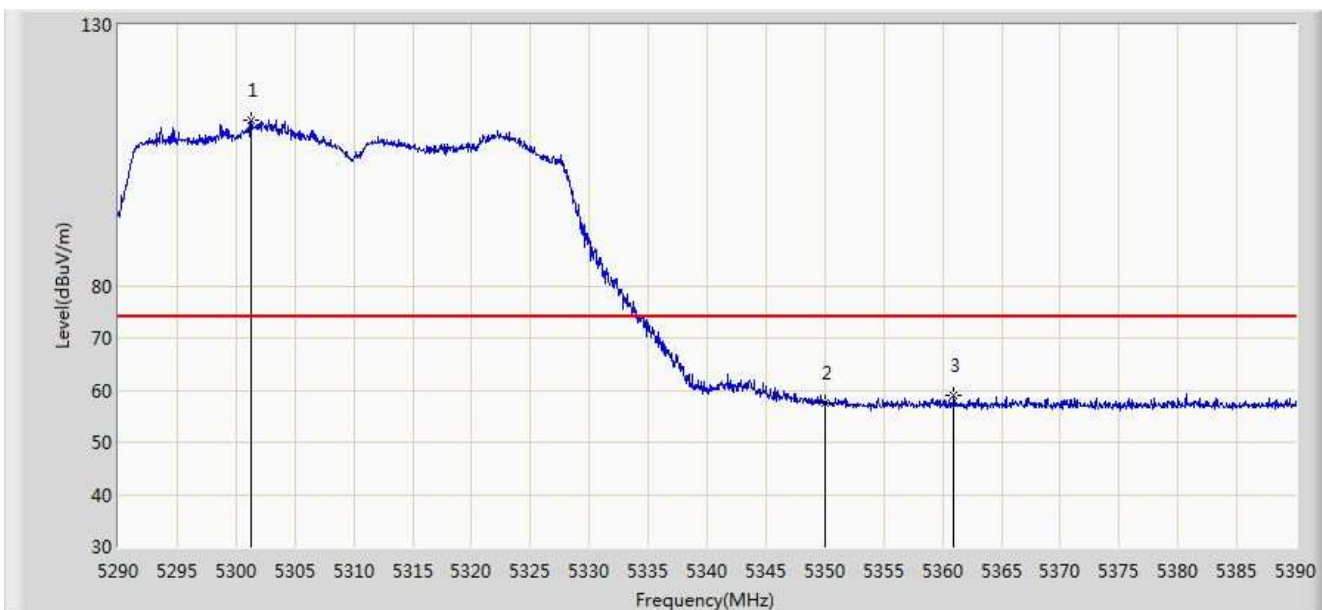


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.250	111.736	107.923	N/A	N/A	3.813	PK
2			5350.000	57.508	53.603	-16.492	74.000	3.904	PK
3			5360.950	58.849	54.925	-15.151	74.000	3.924	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

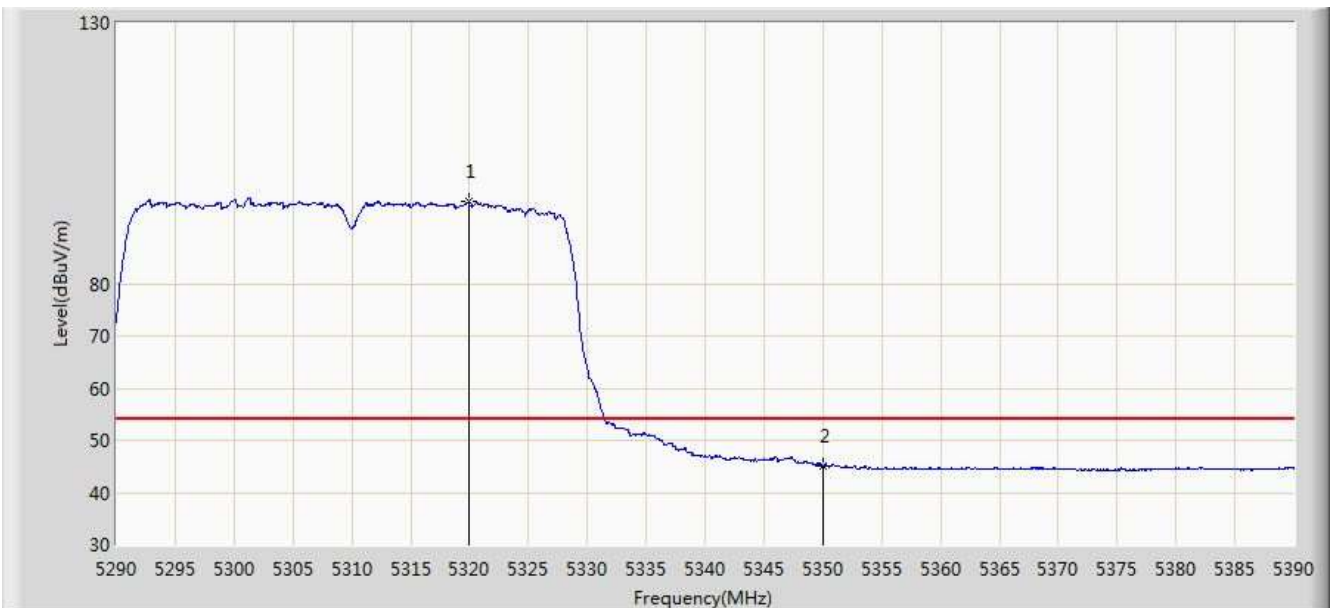


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.900	95.686	91.838	N/A	N/A	3.848	AV
2			5350.000	45.144	41.239	-8.856	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

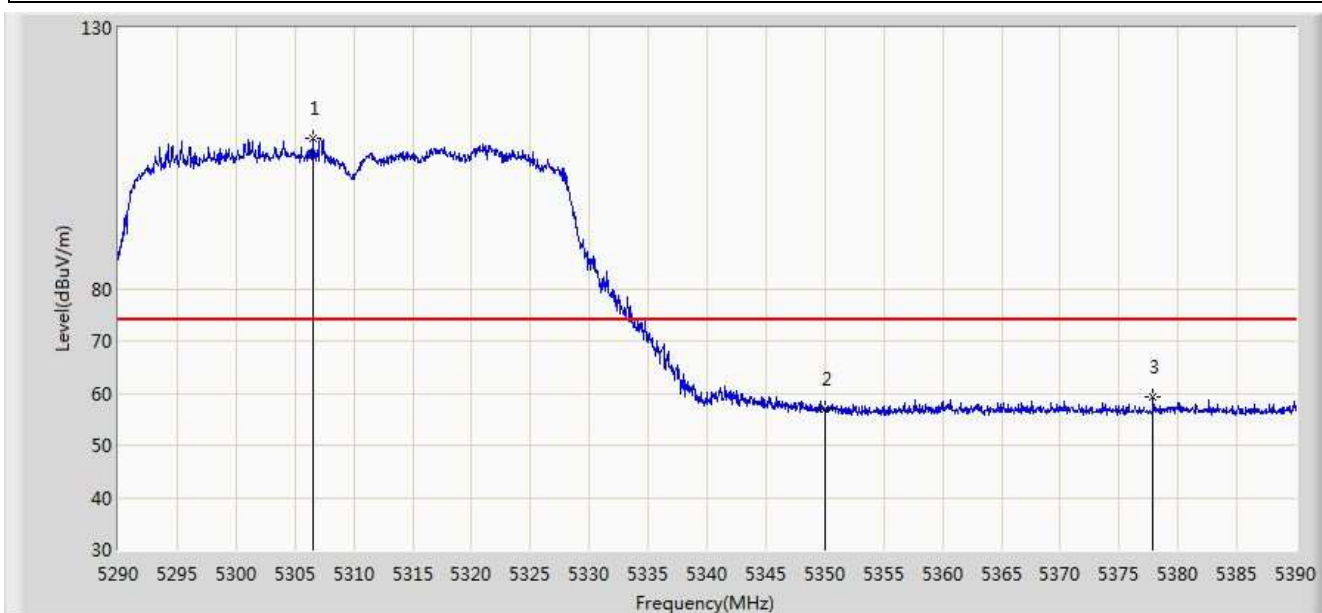


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.500	108.732	104.908	N/A	N/A	3.824	PK
2			5350.000	56.961	53.056	-17.039	74.000	3.904	PK
3			5377.900	59.323	55.368	-14.677	74.000	3.956	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

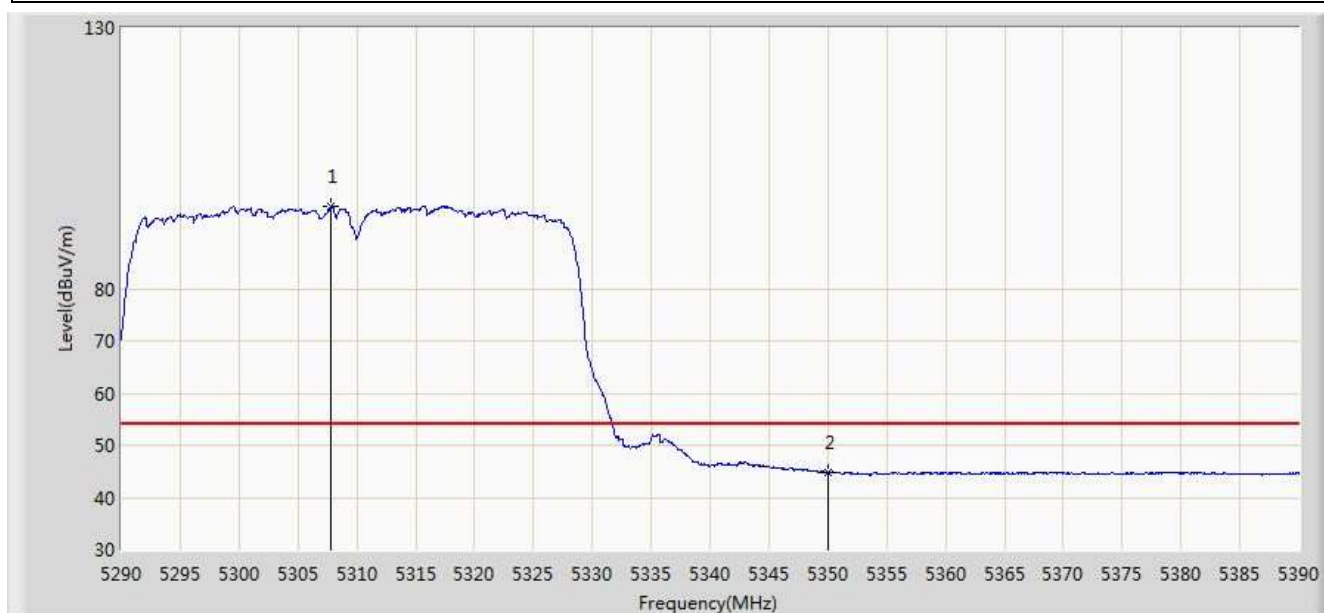


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.850	95.714	91.888	N/A	N/A	3.826	AV
2			5350.000	44.837	40.932	-9.163	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 18:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

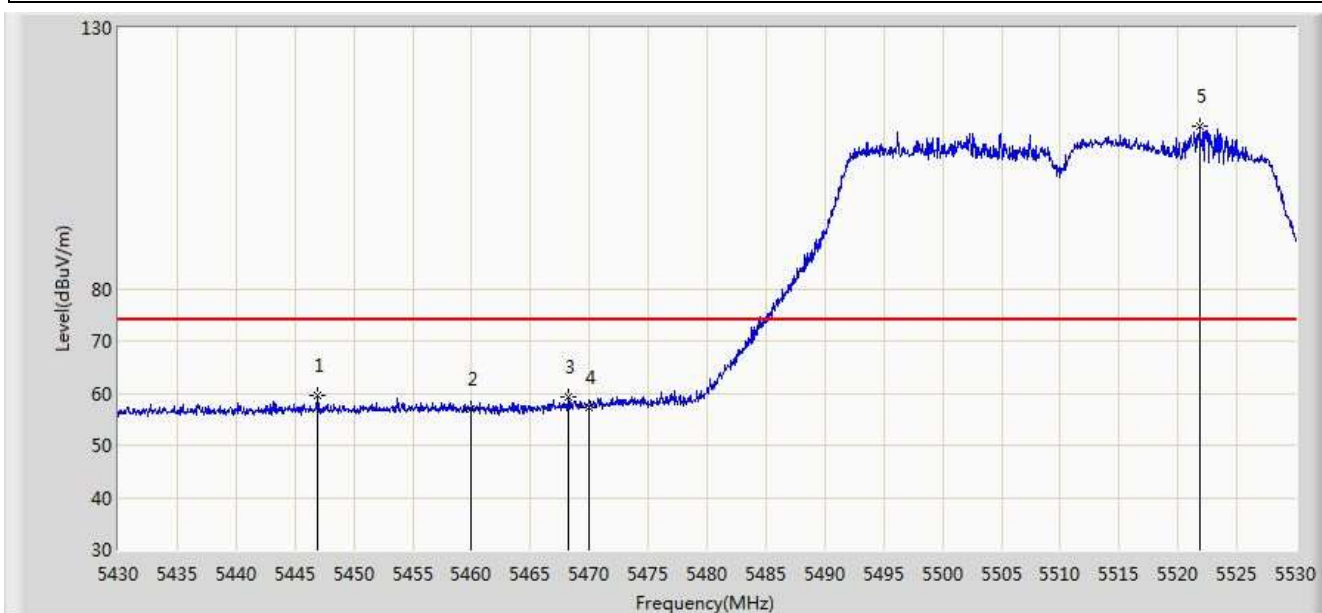


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.900	59.485	55.340	-14.515	74.000	4.145	PK
2			5460.000	56.905	52.725	-17.095	74.000	4.180	PK
3			5468.250	59.293	55.095	-14.707	74.000	4.198	PK
4			5470.000	57.258	53.056	-16.742	74.000	4.202	PK
5		*	5521.850	111.279	106.942	N/A	N/A	4.337	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

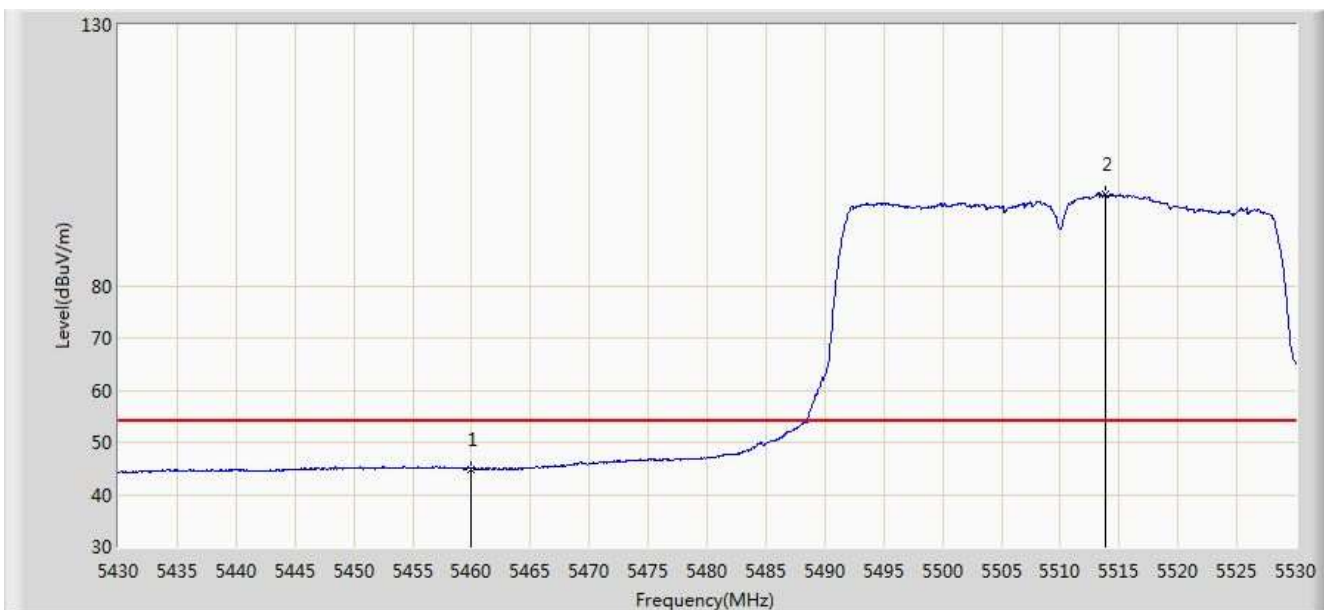


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.856	40.676	-9.144	54.000	4.180	AV
2		*	5513.850	97.585	93.273	N/A	N/A	4.313	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

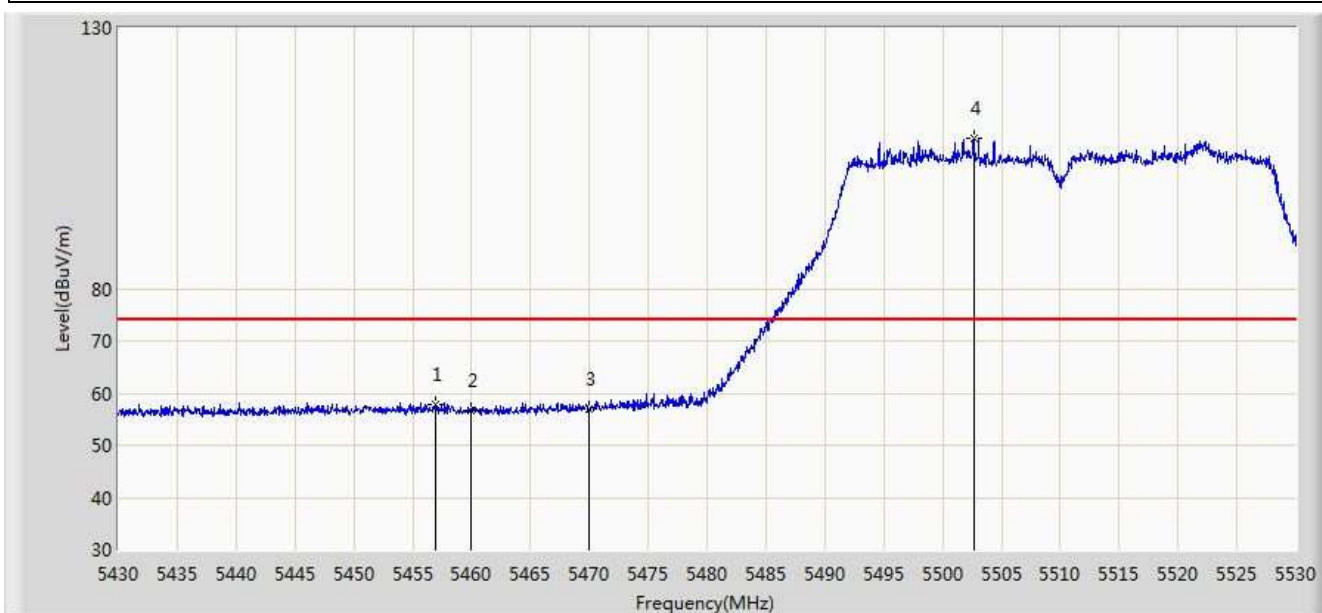


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.950	57.840	53.666	-16.160	74.000	4.173	PK
2			5460.000	56.577	52.397	-17.423	74.000	4.180	PK
3			5470.000	56.953	52.751	-17.047	74.000	4.202	PK
4		*	5502.650	108.956	104.676	N/A	N/A	4.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

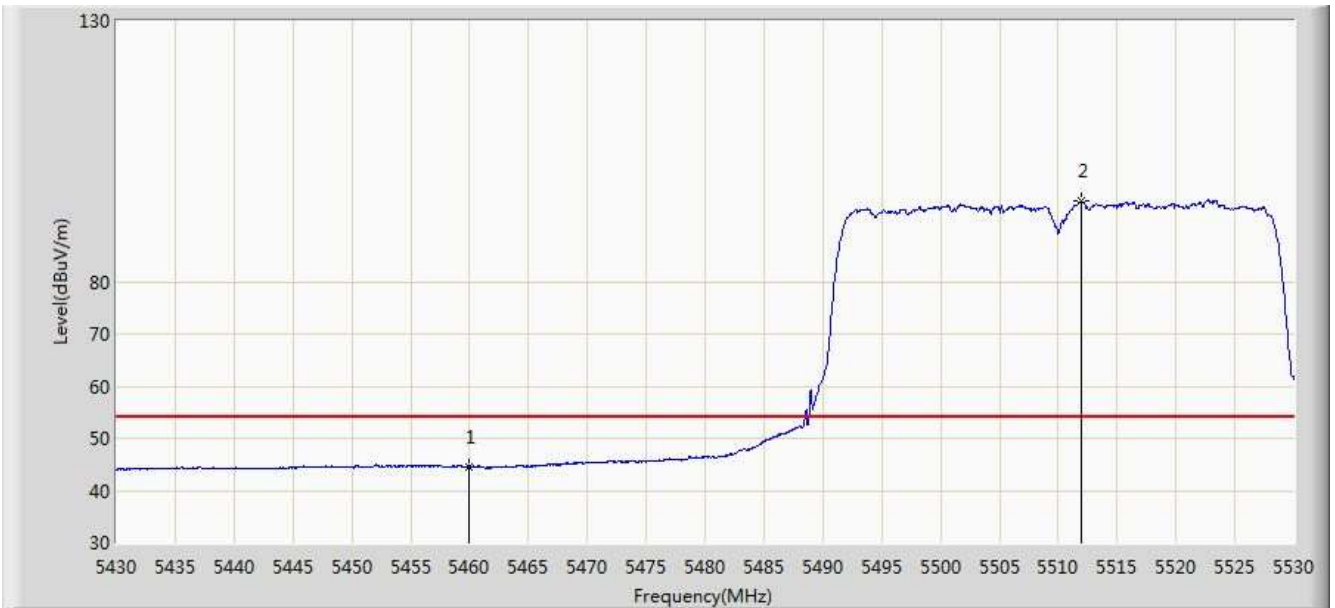


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.530	40.350	-9.470	54.000	4.180	AV
2		*	5511.900	95.406	91.099	N/A	N/A	4.307	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

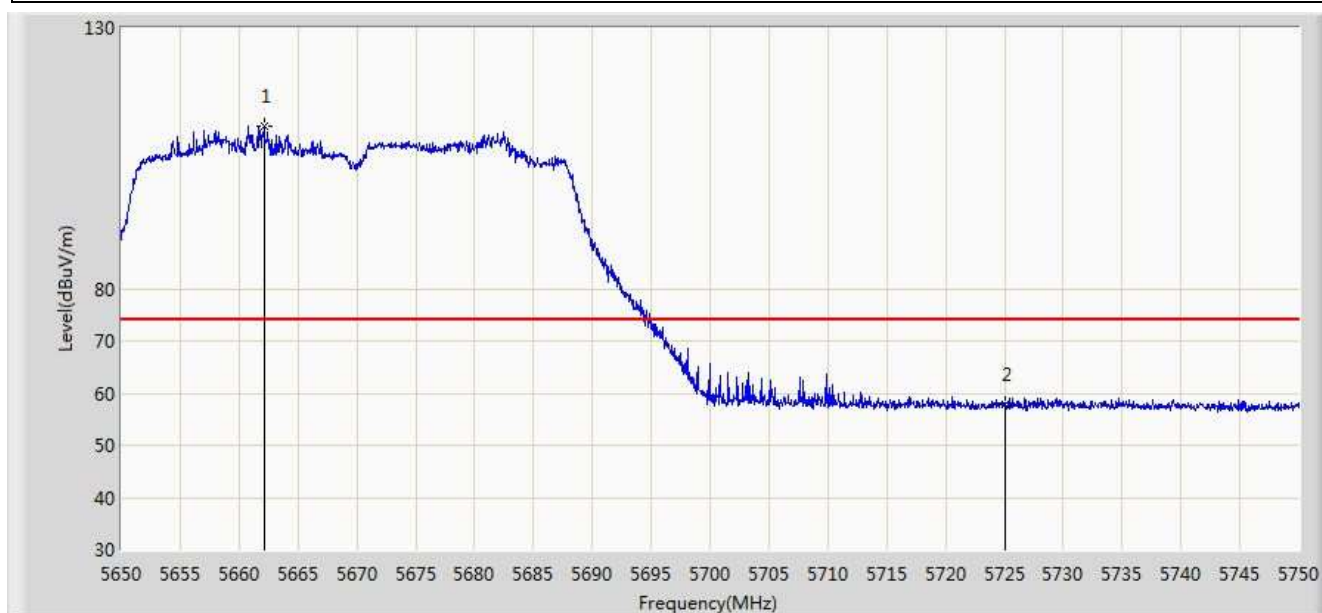


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.100	111.099	106.384	N/A	N/A	4.715	PK
2			5725.000	57.734	52.705	-16.266	74.000	5.029	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

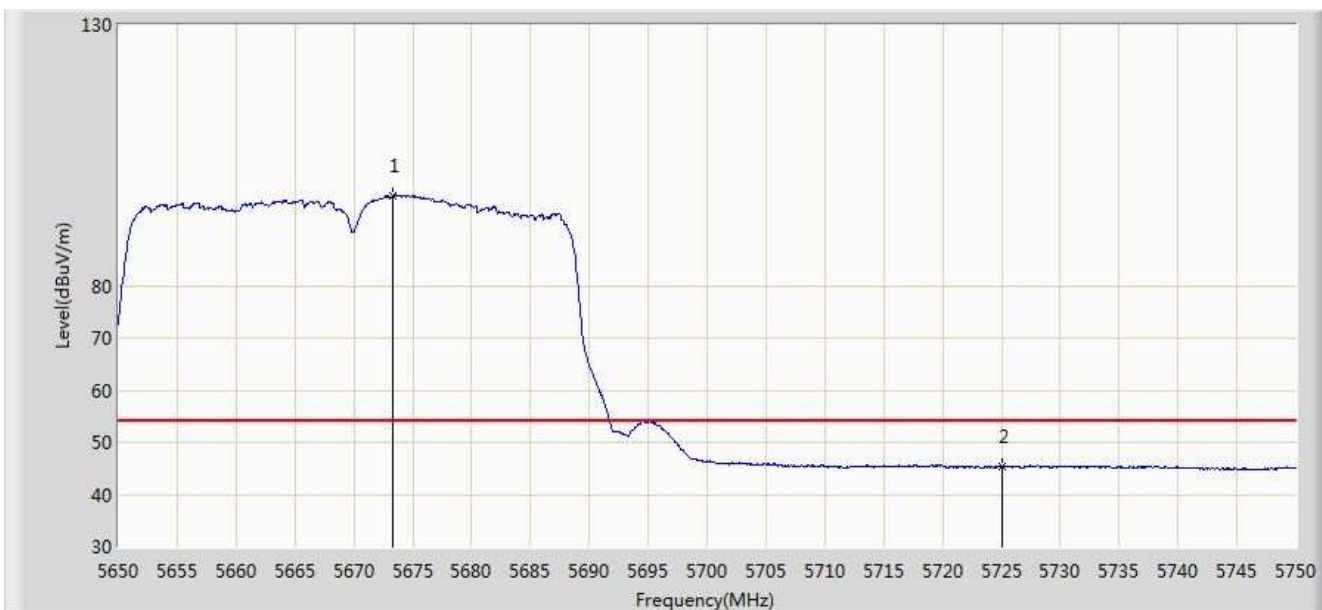


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.350	97.246	92.485	N/A	N/A	4.760	AV
2			5725.000	45.315	40.286	-8.685	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

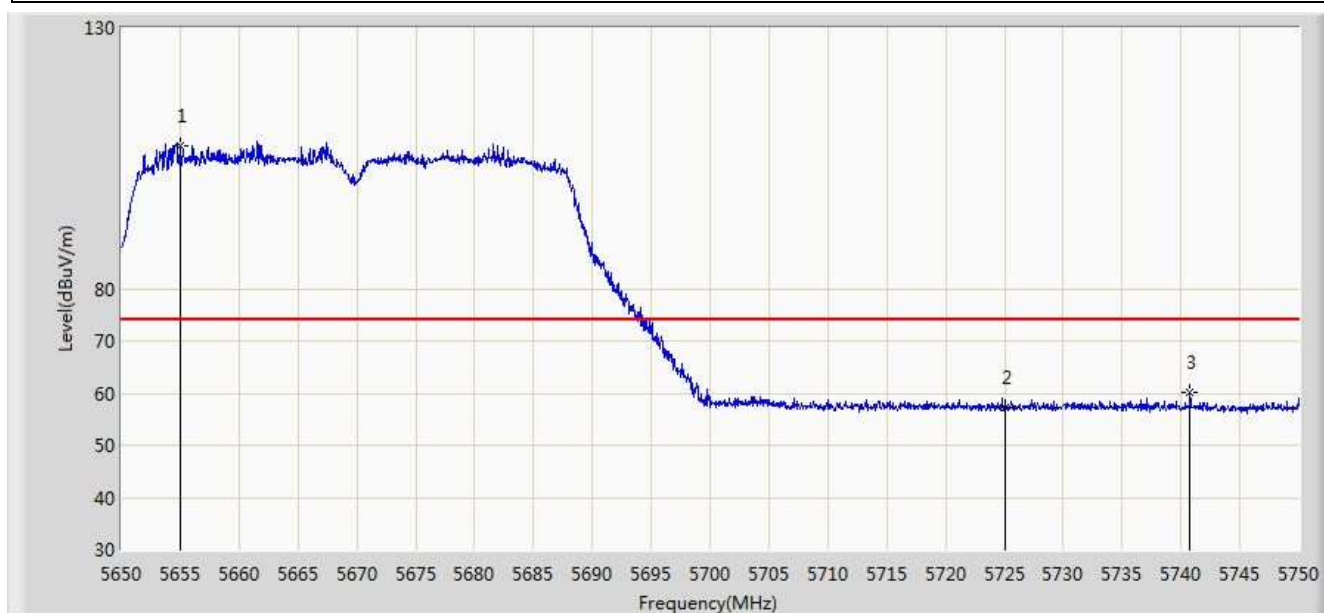


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5654.950	107.525	102.838	N/A	N/A	4.687	PK
2			5725.000	57.208	52.179	-16.792	74.000	5.029	PK
3			5740.750	60.192	55.063	-13.808	74.000	5.130	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

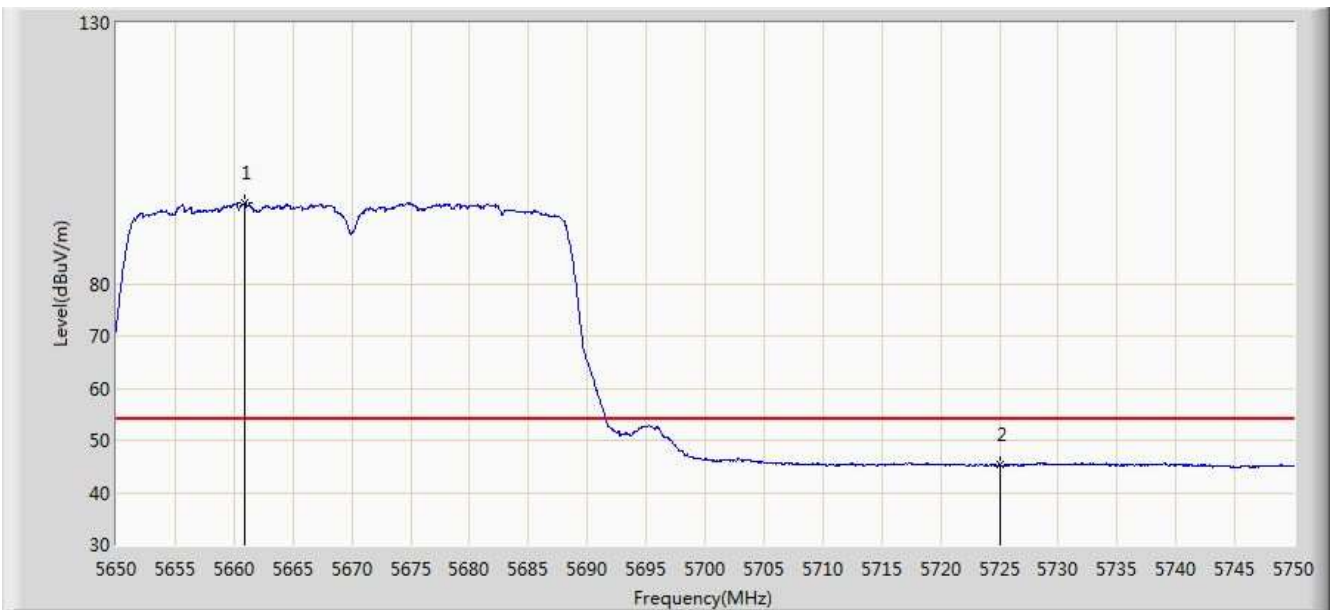


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5660.850	95.459	90.749	N/A	N/A	4.710	AV
2			5725.000	45.253	40.224	-8.747	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

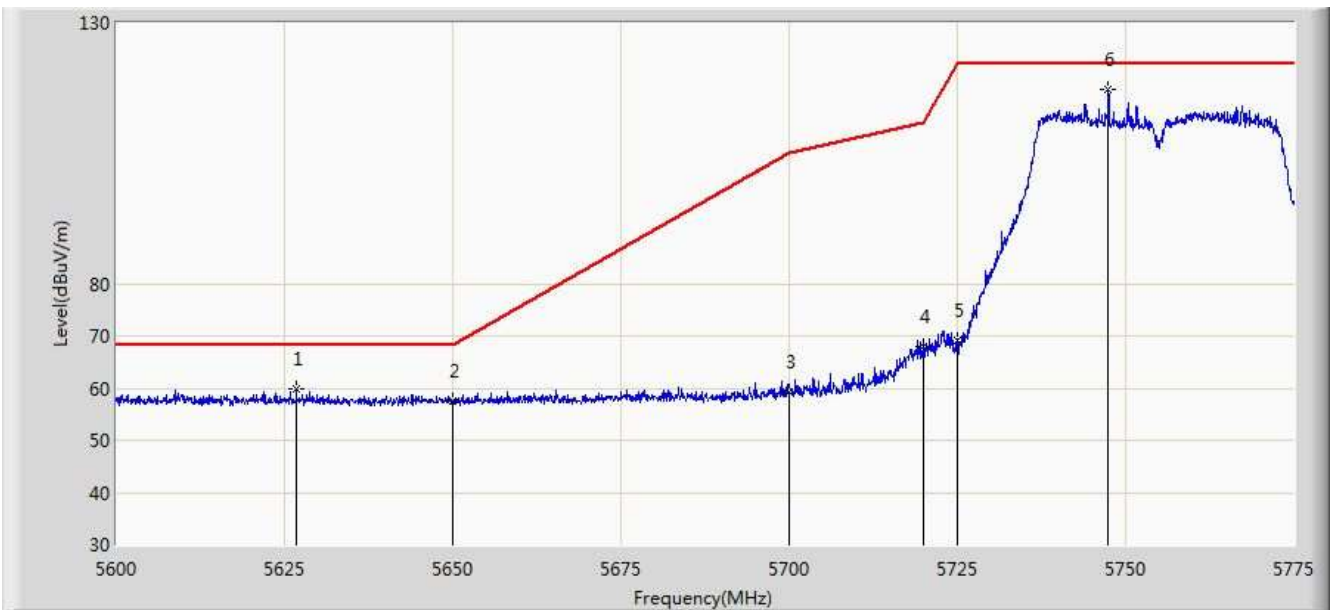


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5626.775	59.843	55.243	-8.357	68.200	4.601	PK
2			5650.000	57.643	52.972	-10.557	68.200	4.671	PK
3			5700.000	59.324	54.446	-45.876	105.200	4.878	PK
4			5720.000	67.958	62.961	-42.842	110.800	4.997	PK
5			5725.000	69.224	64.195	-52.976	122.200	5.029	PK
6		*	5747.437	117.182	112.013	N/A	N/A	5.169	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

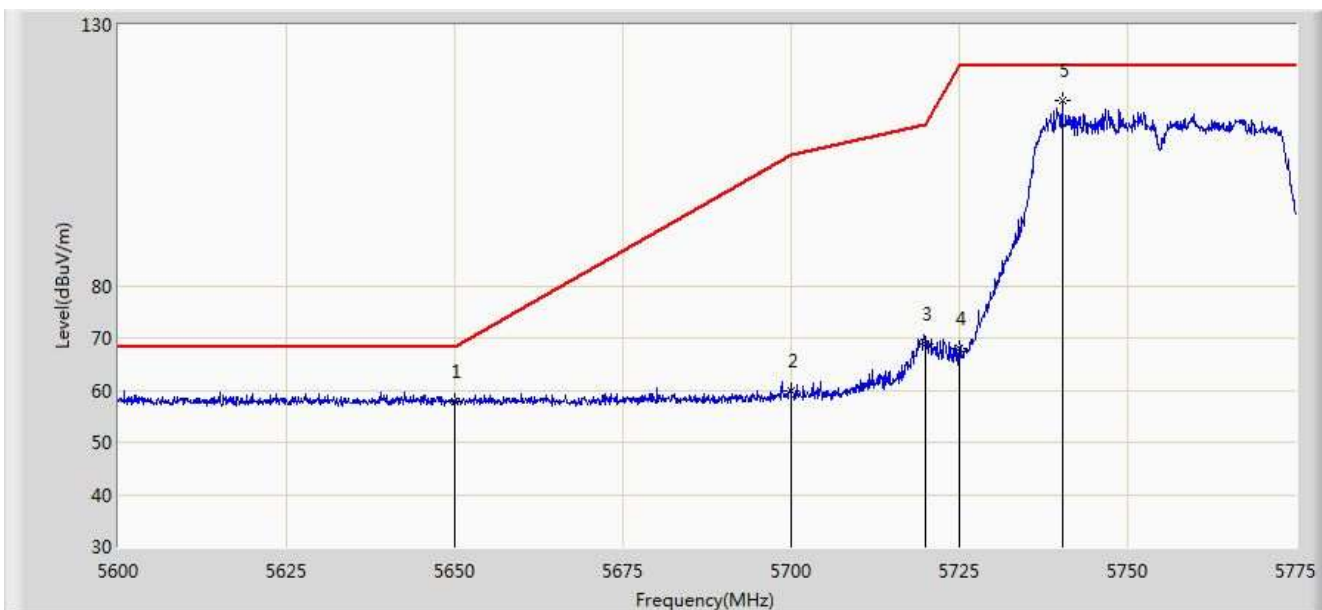


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	57.832	53.161	-10.368	68.200	4.671	PK
2			5700.000	59.723	54.845	-45.477	105.200	4.878	PK
3			5720.000	68.927	63.930	-41.873	110.800	4.997	PK
4			5725.000	68.038	63.009	-54.162	122.200	5.029	PK
5		*	5740.350	115.382	110.255	N/A	N/A	5.127	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

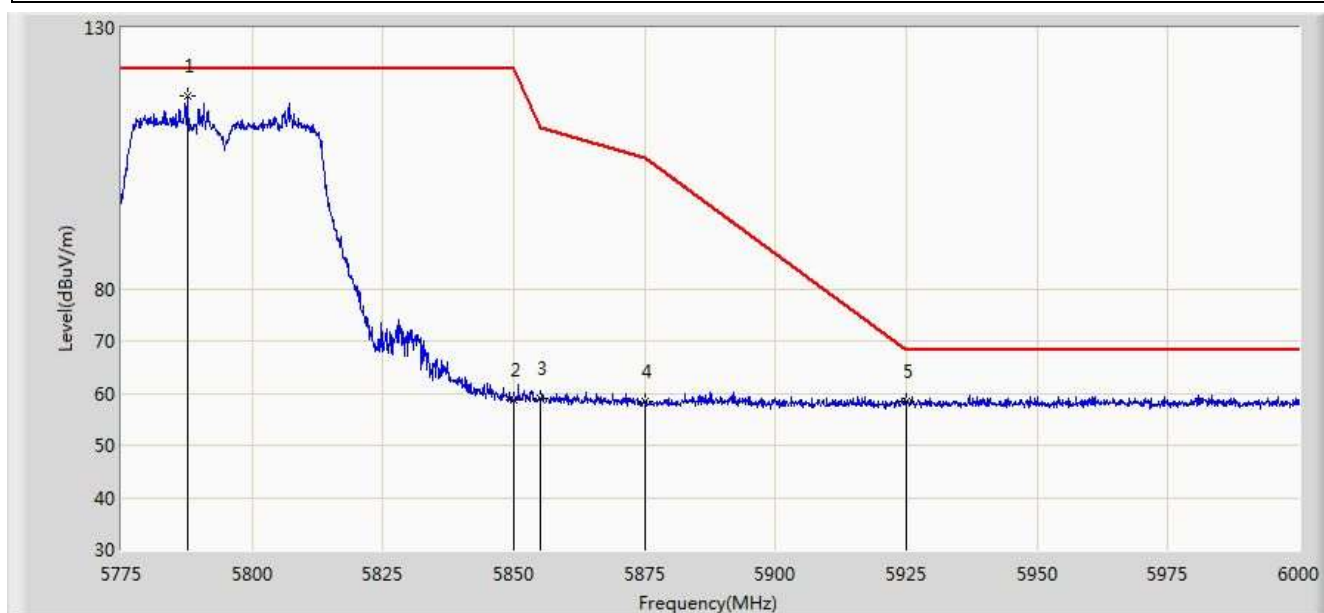


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.712	116.834	111.454	N/A	N/A	5.381	PK
2			5850.000	58.606	52.880	-63.594	122.200	5.726	PK
3			5855.000	59.006	53.260	-51.794	110.800	5.746	PK
4			5875.000	58.282	52.462	-46.918	105.200	5.820	PK
5			5925.000	58.436	52.470	-9.764	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

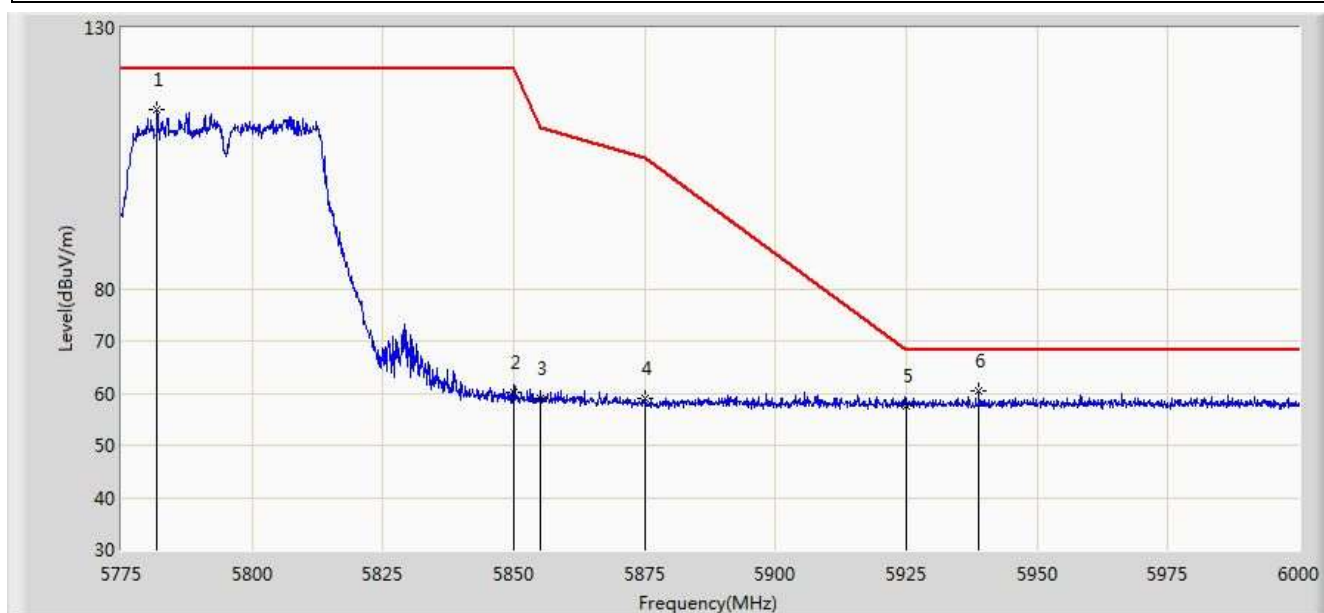


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5781.862	114.451	109.100	N/A	N/A	5.350	PK
2			5850.000	60.082	54.356	-62.118	122.200	5.726	PK
3			5855.000	59.120	53.374	-51.680	110.800	5.746	PK
4			5875.000	58.916	53.096	-46.284	105.200	5.820	PK
5			5925.000	57.640	51.674	-10.560	68.200	5.967	PK
6			5938.800	60.324	54.323	-7.876	68.200	6.001	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

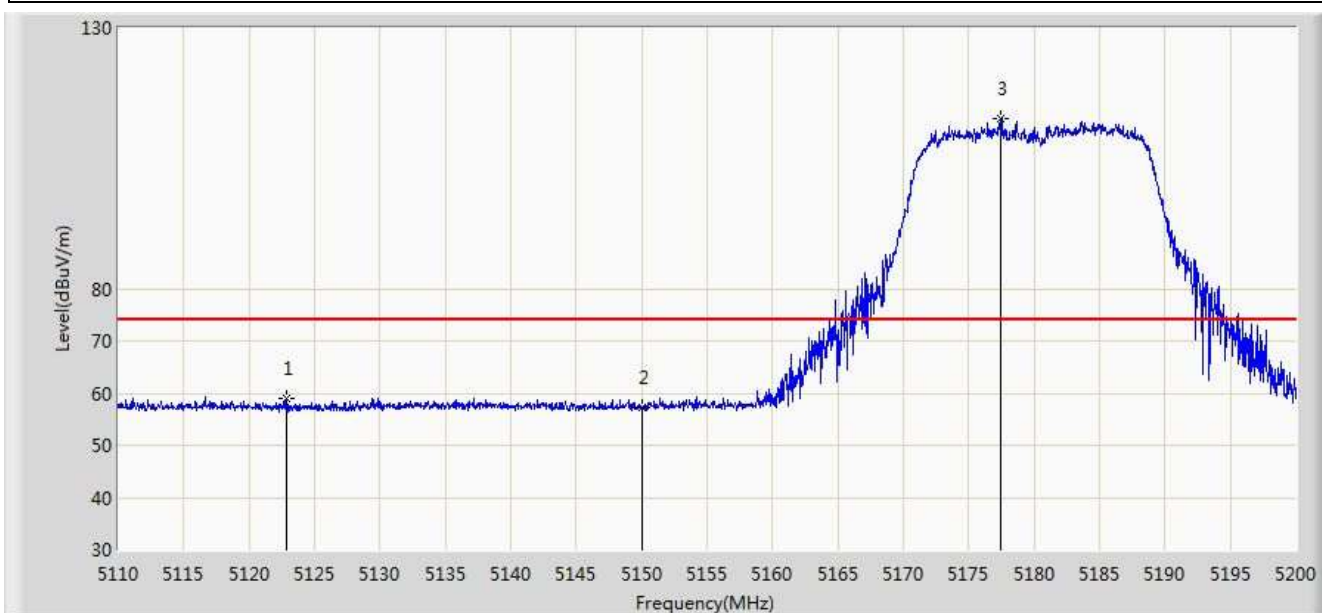


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5122.825	59.019	54.844	-14.981	74.000	4.175	PK
2			5150.000	57.229	53.060	-16.771	74.000	4.170	PK
3		*	5177.455	112.745	108.667	N/A	N/A	4.078	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

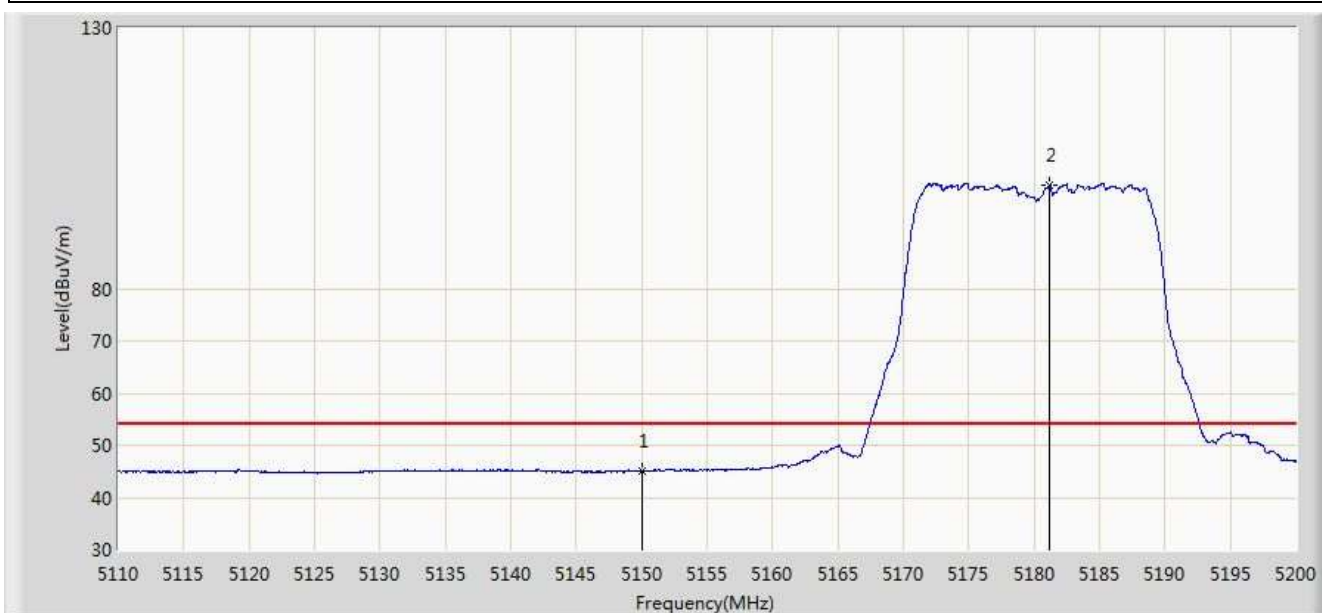


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.977	40.808	-9.023	54.000	4.170	AV
2		*	5181.190	99.763	95.698	N/A	N/A	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

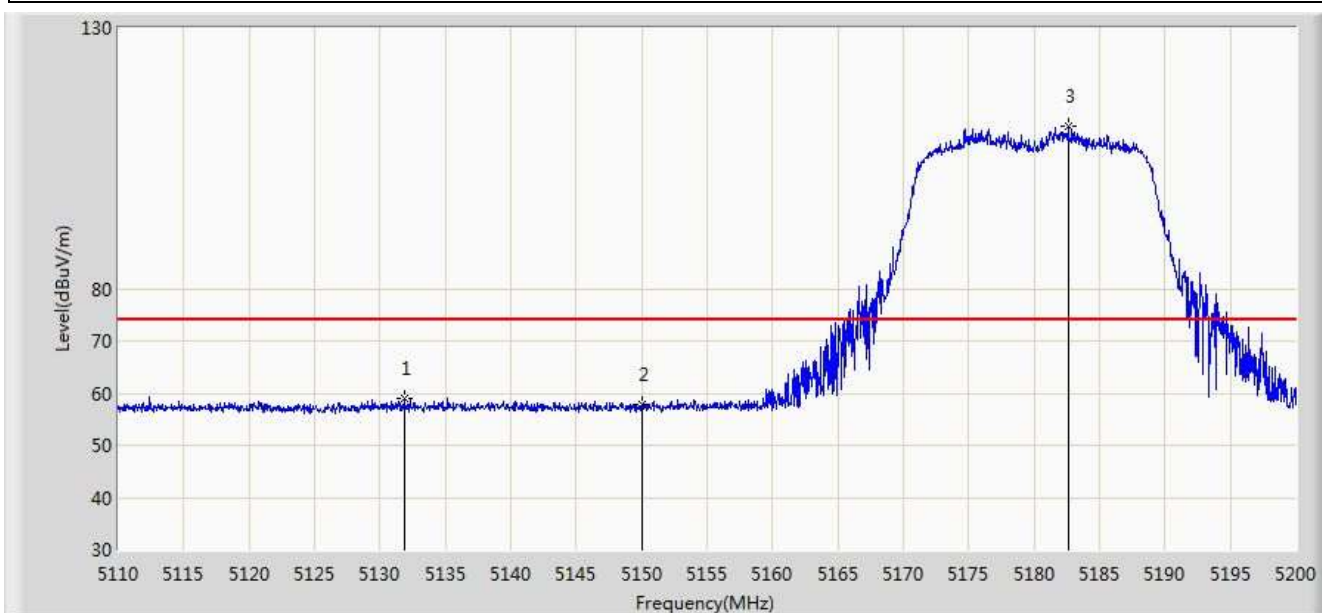


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.825	59.091	54.916	-14.909	74.000	4.175	PK
2			5150.000	57.730	53.561	-16.270	74.000	4.170	PK
3		*	5182.585	111.149	107.089	N/A	N/A	4.060	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

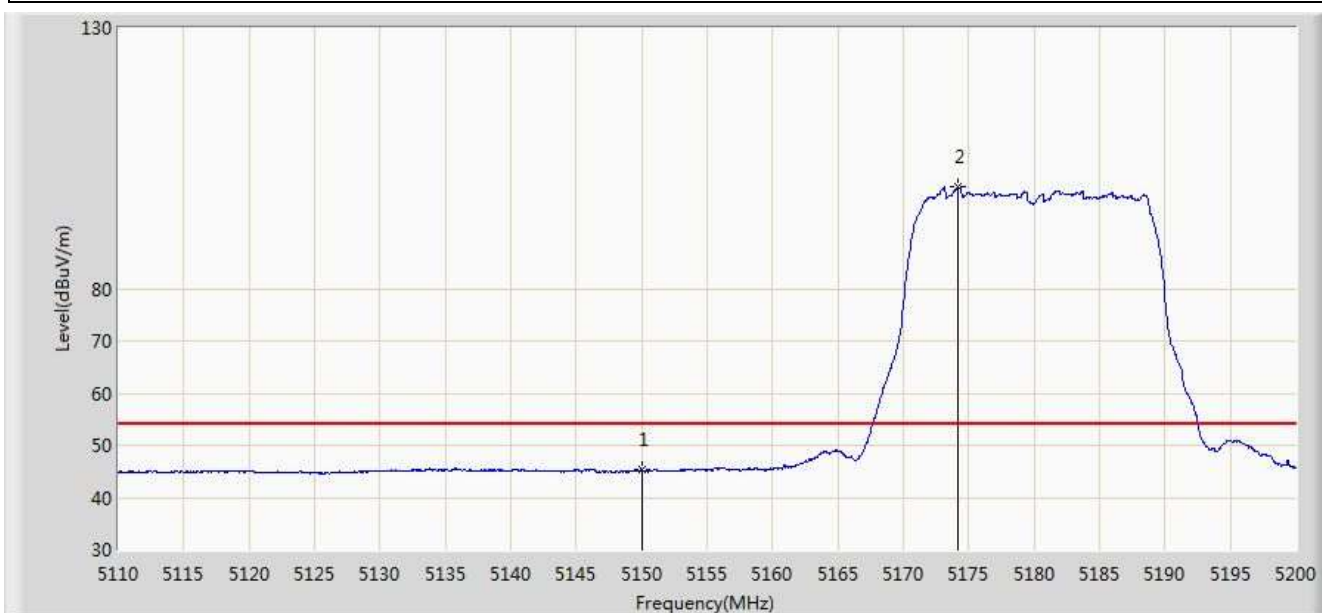


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.259	41.090	-8.741	54.000	4.170	AV
2		*	5174.215	99.441	95.352	N/A	N/A	4.090	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

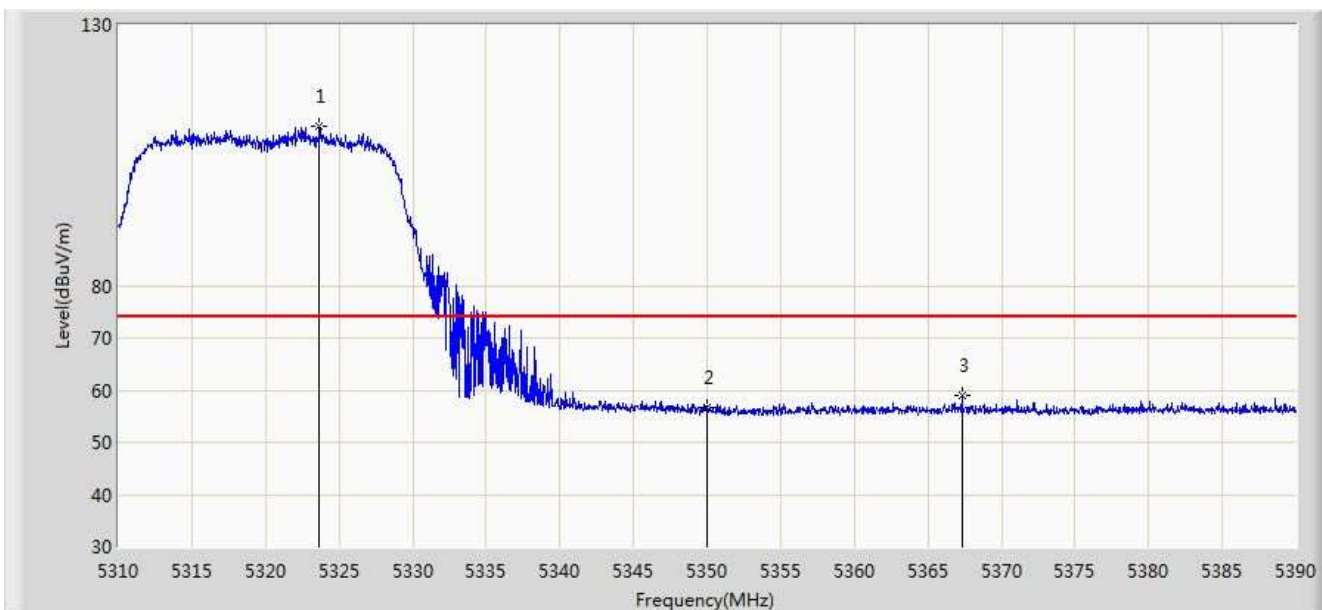


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.680	110.591	106.735	N/A	N/A	3.855	PK
2			5350.000	56.557	52.652	-17.443	74.000	3.904	PK
3			5367.320	59.104	55.168	-14.896	74.000	3.936	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

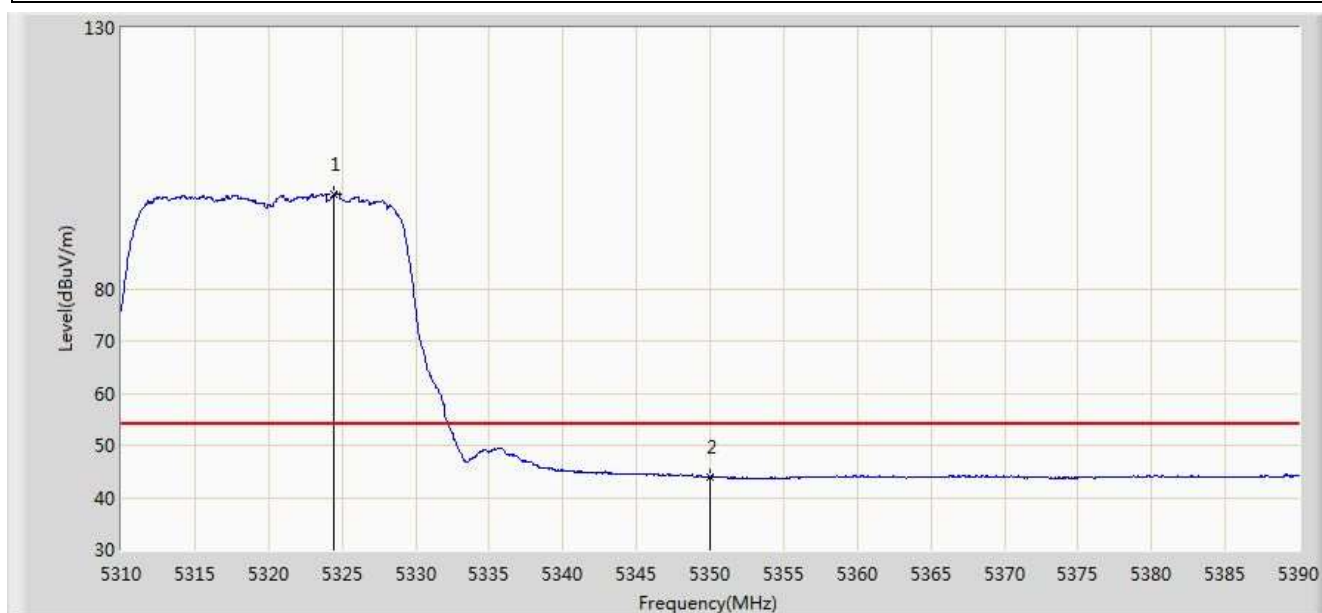


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.480	98.201	94.344	N/A	N/A	3.857	AV
2			5350.000	43.953	40.048	-10.047	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

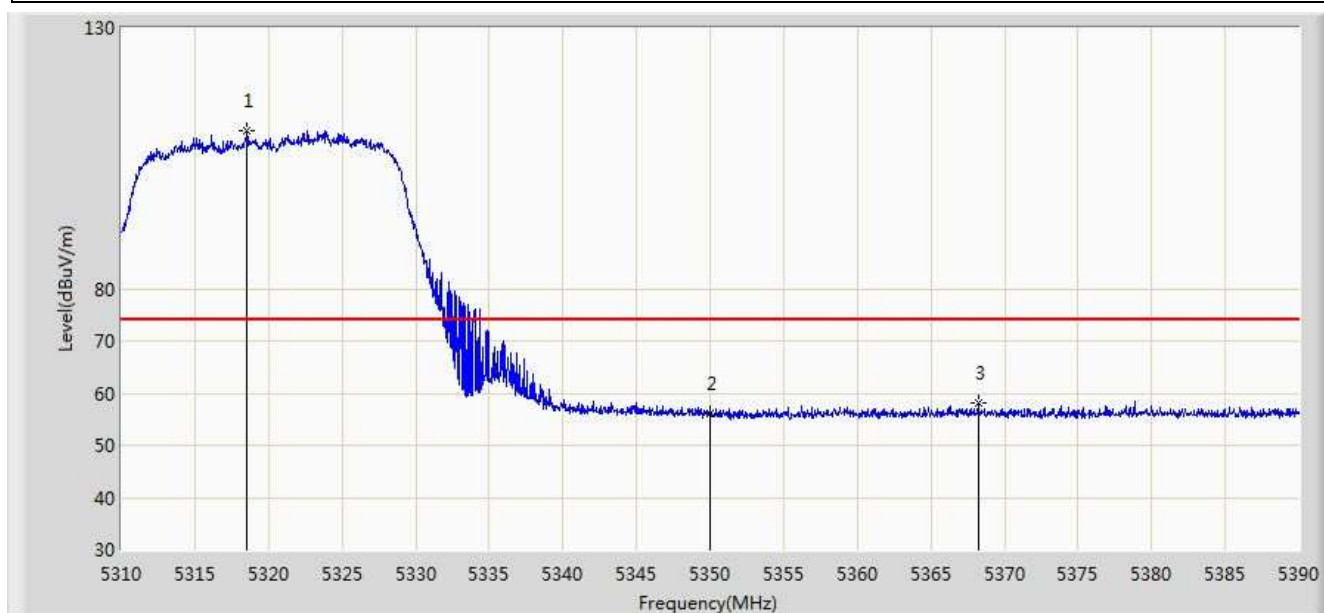


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.560	110.348	106.502	N/A	N/A	3.846	PK
2			5350.000	56.010	52.105	-17.990	74.000	3.904	PK
3			5368.240	58.129	54.191	-15.871	74.000	3.938	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

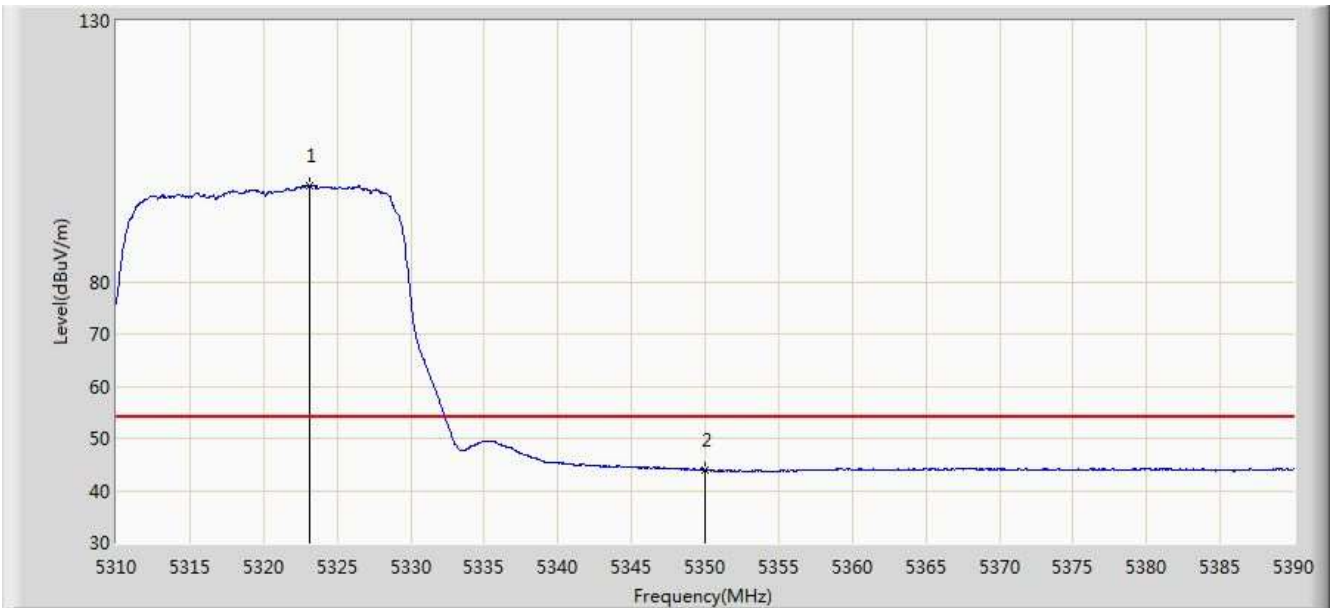


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.160	98.488	94.633	N/A	N/A	3.854	AV
2			5350.000	43.890	39.985	-10.110	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 19:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

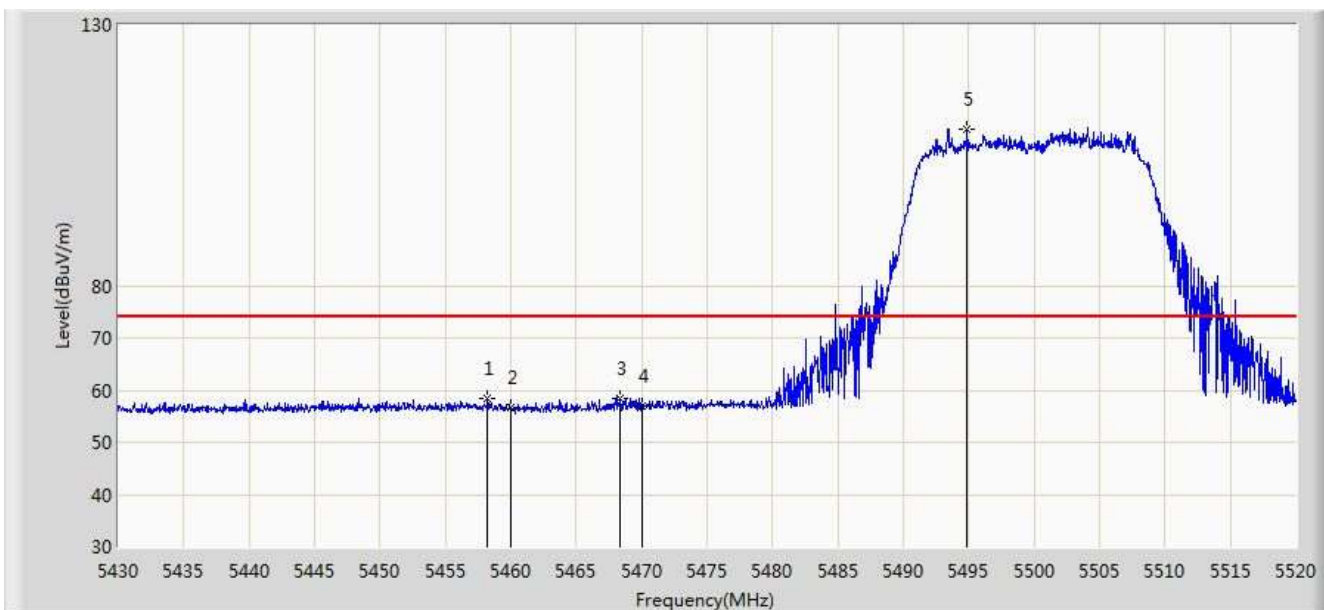


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.215	58.341	54.165	-15.659	74.000	4.177	PK
2			5460.000	56.557	52.377	-17.443	74.000	4.180	PK
3			5468.295	58.471	54.272	-15.529	74.000	4.198	PK
4			5470.000	56.839	52.637	-17.161	74.000	4.202	PK
5		*	5494.845	110.094	105.835	N/A	N/A	4.259	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

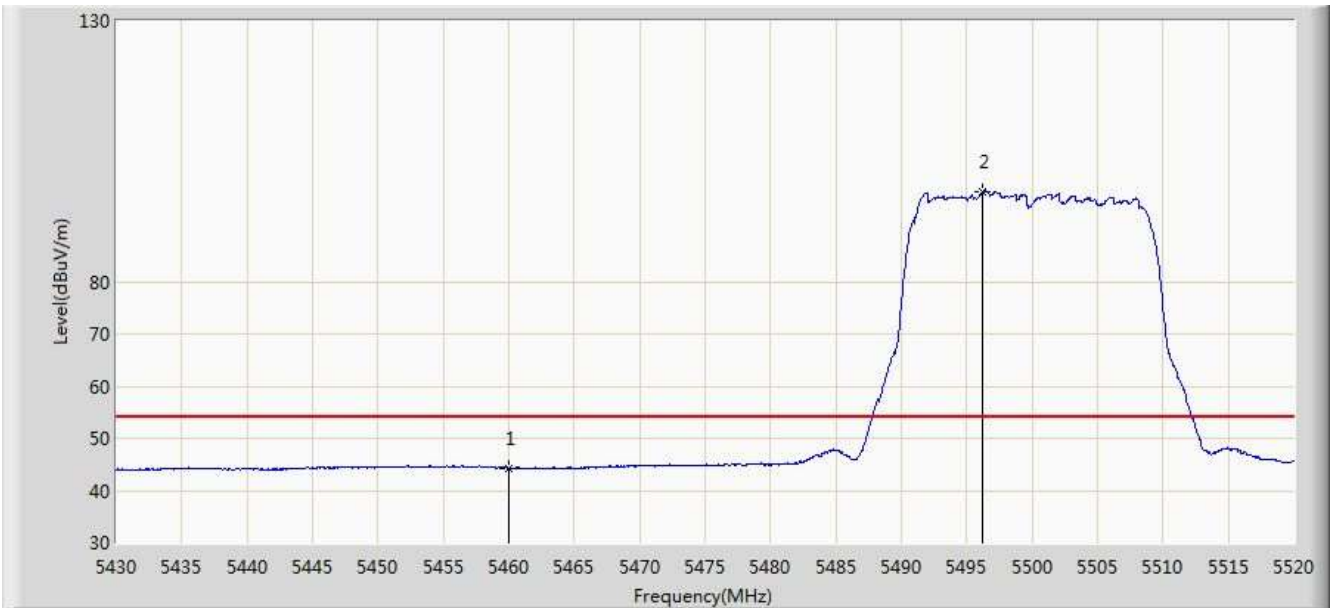


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.287	40.107	-9.713	54.000	4.180	AV
2		*	5496.240	97.247	92.985	N/A	N/A	4.261	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

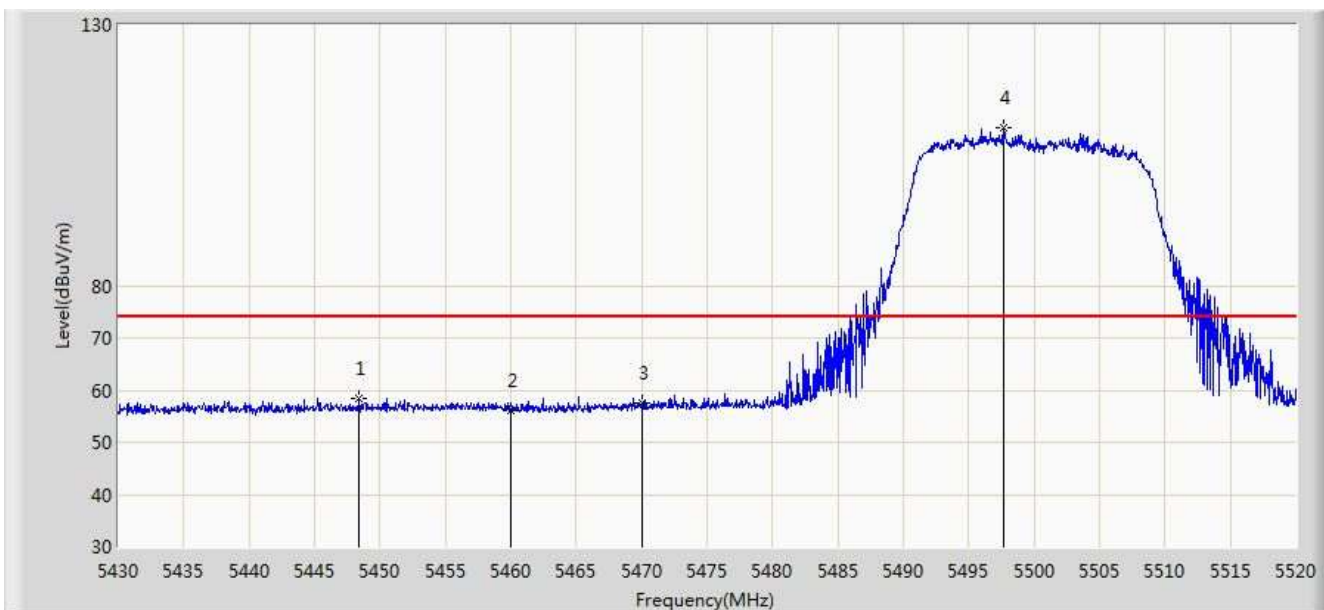


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.405	58.264	54.114	-15.736	74.000	4.149	PK
2			5460.000	56.075	51.895	-17.925	74.000	4.180	PK
3			5470.000	57.518	53.316	-16.482	74.000	4.202	PK
4		*	5497.725	110.259	105.994	N/A	N/A	4.265	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

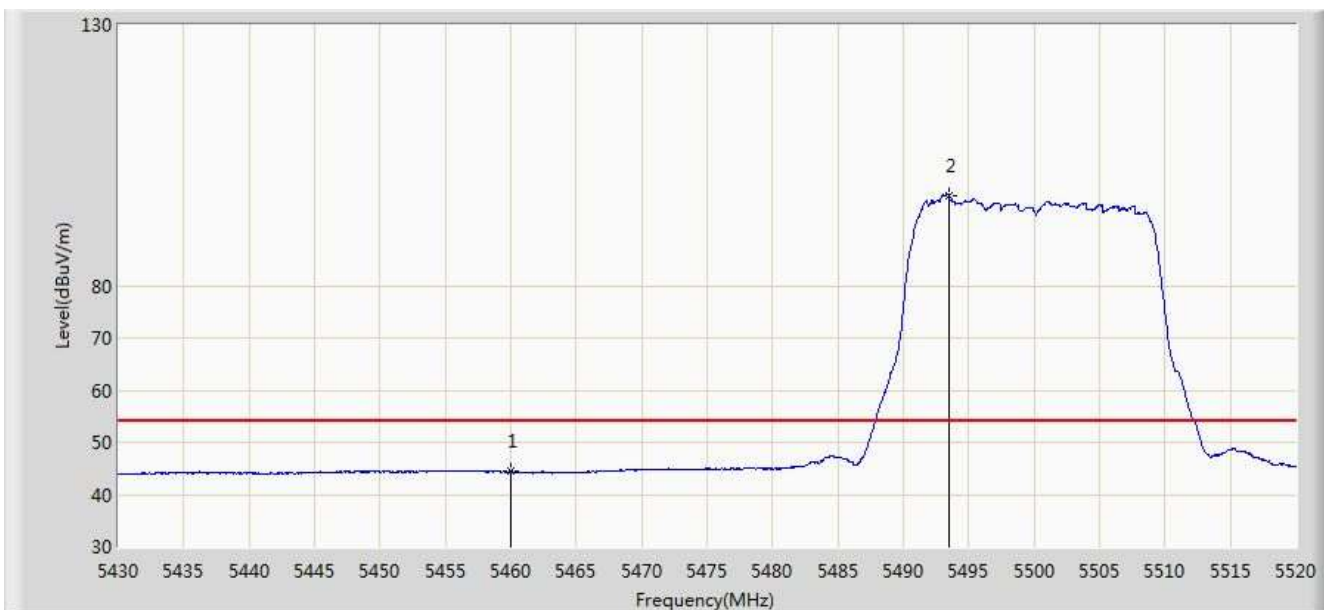


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.363	40.183	-9.637	54.000	4.180	AV
2		*	5493.495	97.333	93.077	N/A	54.000	4.255	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

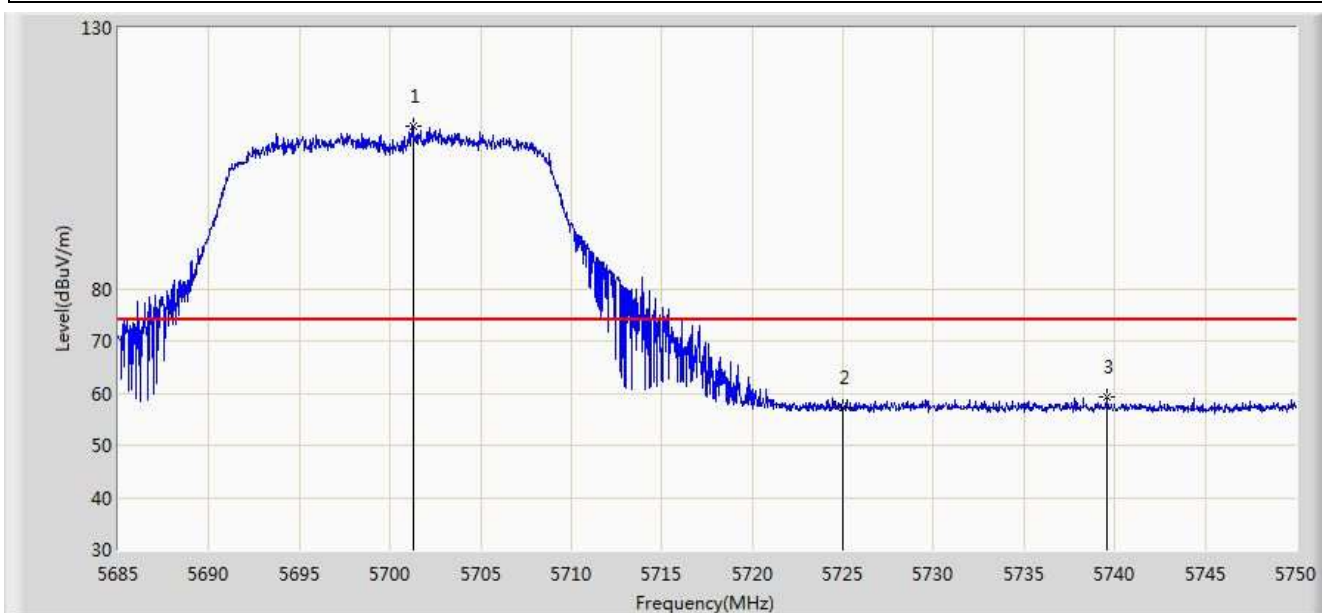


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.250	111.234	106.349	N/A	N/A	4.885	PK
2			5725.000	57.244	52.215	-16.756	74.000	5.029	PK
3			5739.535	59.148	54.026	-14.852	74.000	5.122	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

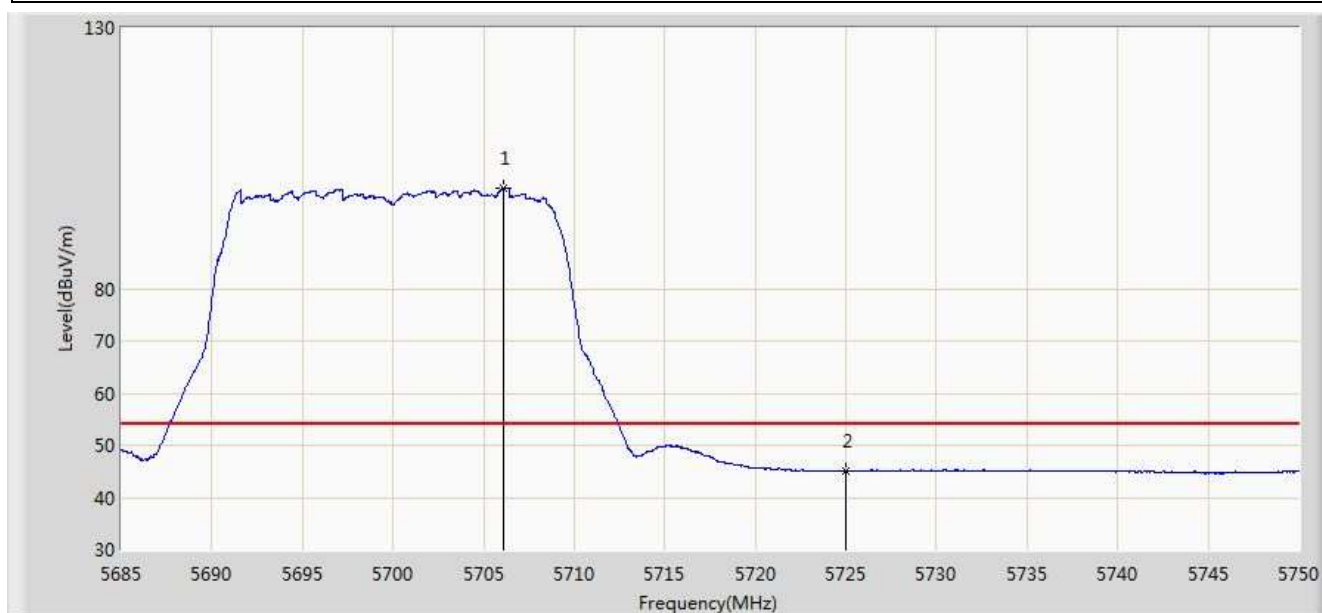


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.092	99.339	94.428	N/A	N/A	4.911	AV
2			5725.000	45.038	40.009	-8.962	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

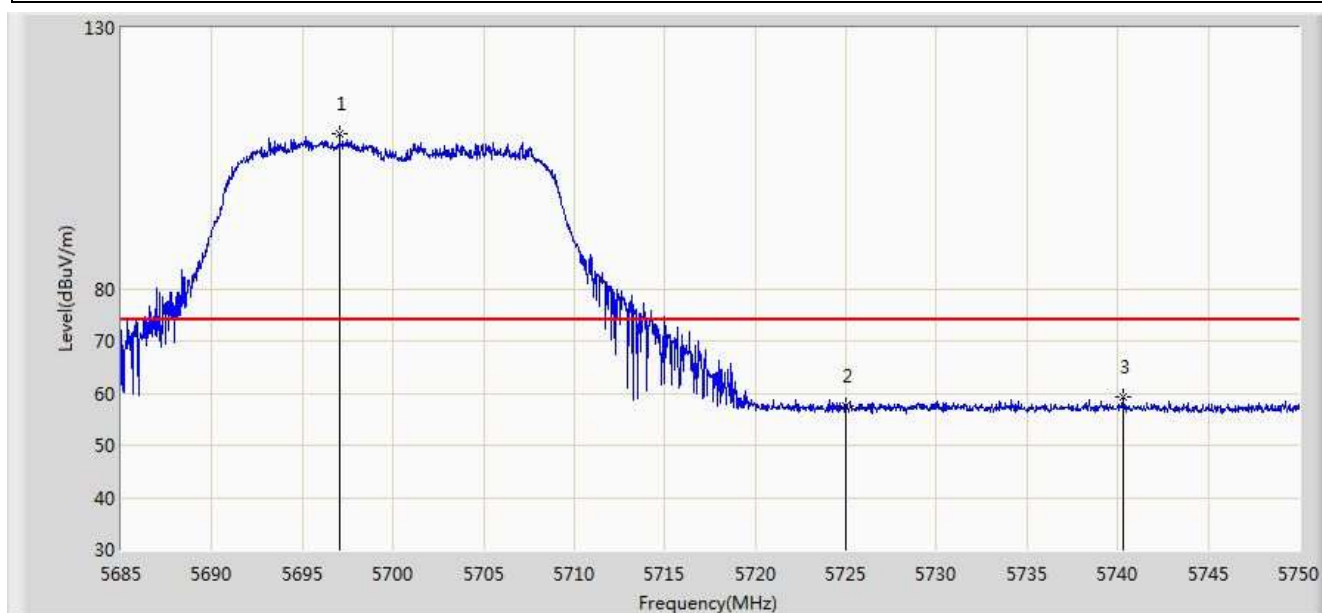


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.058	109.689	104.826	N/A	N/A	4.863	PK
2			5725.000	57.587	52.558	-16.413	74.000	5.029	PK
3			5740.283	59.241	54.115	-14.759	74.000	5.127	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

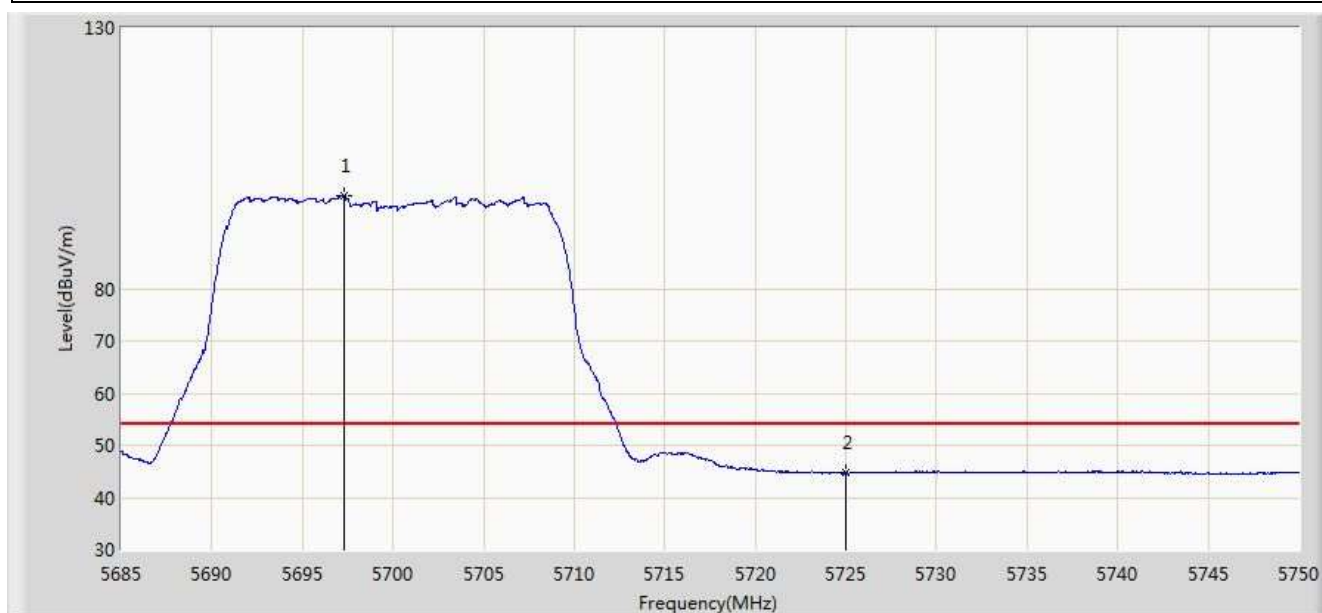


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.285	97.895	93.031	N/A	N/A	4.864	AV
2			5725.000	44.640	39.611	-9.360	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

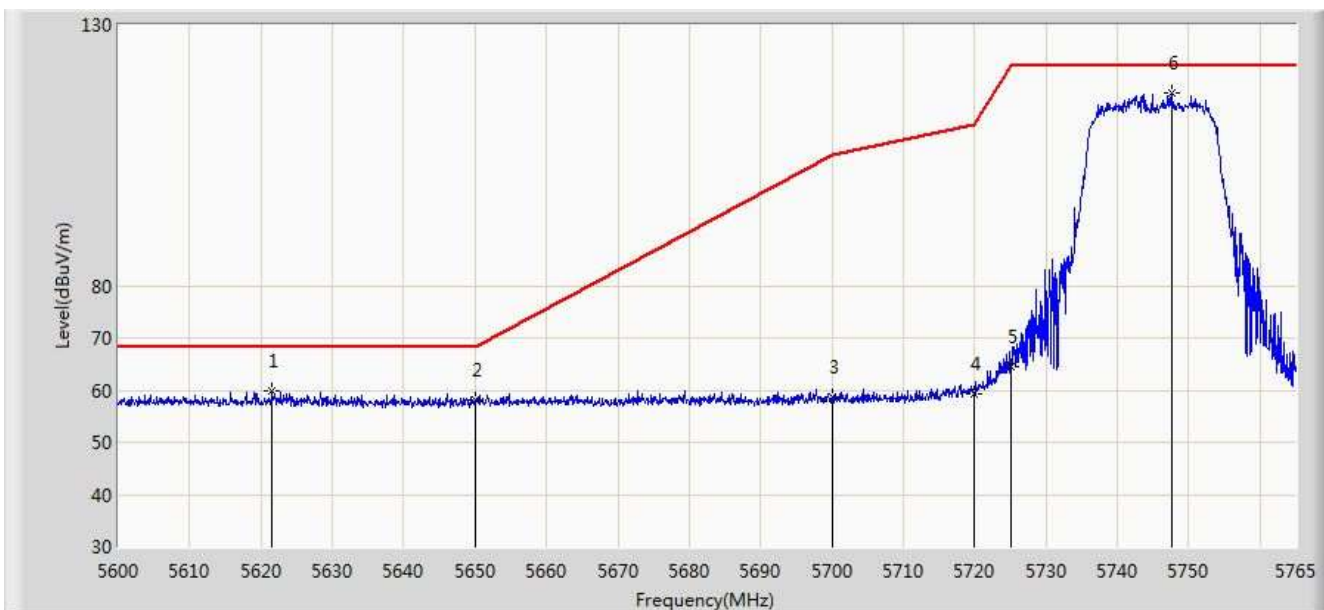


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5621.533	59.934	55.349	-8.266	68.200	4.585	PK
2			5650.000	58.008	53.337	-10.192	68.200	4.671	PK
3			5700.000	58.640	53.762	-46.560	105.200	4.878	PK
4			5720.000	59.386	54.389	-51.414	110.800	4.997	PK
5			5725.000	64.436	59.407	-57.764	122.200	5.029	PK
6		*	5747.592	117.032	111.862	N/A	N/A	5.170	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

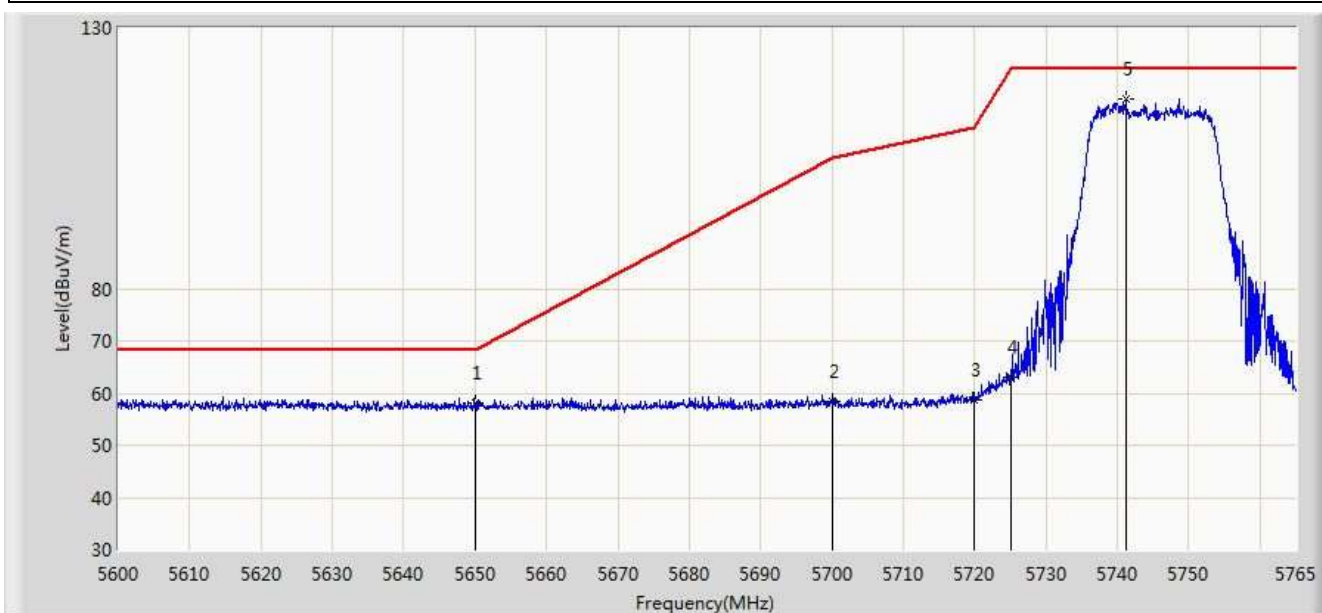


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	58.182	53.511	-10.018	68.200	4.671	PK
2			5700.000	58.452	53.574	-46.748	105.200	4.878	PK
3			5720.000	58.725	53.728	-52.075	110.800	4.997	PK
4			5725.000	62.997	57.968	-59.203	122.200	5.029	PK
5		*	5741.158	116.306	111.174	N/A	N/A	5.132	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

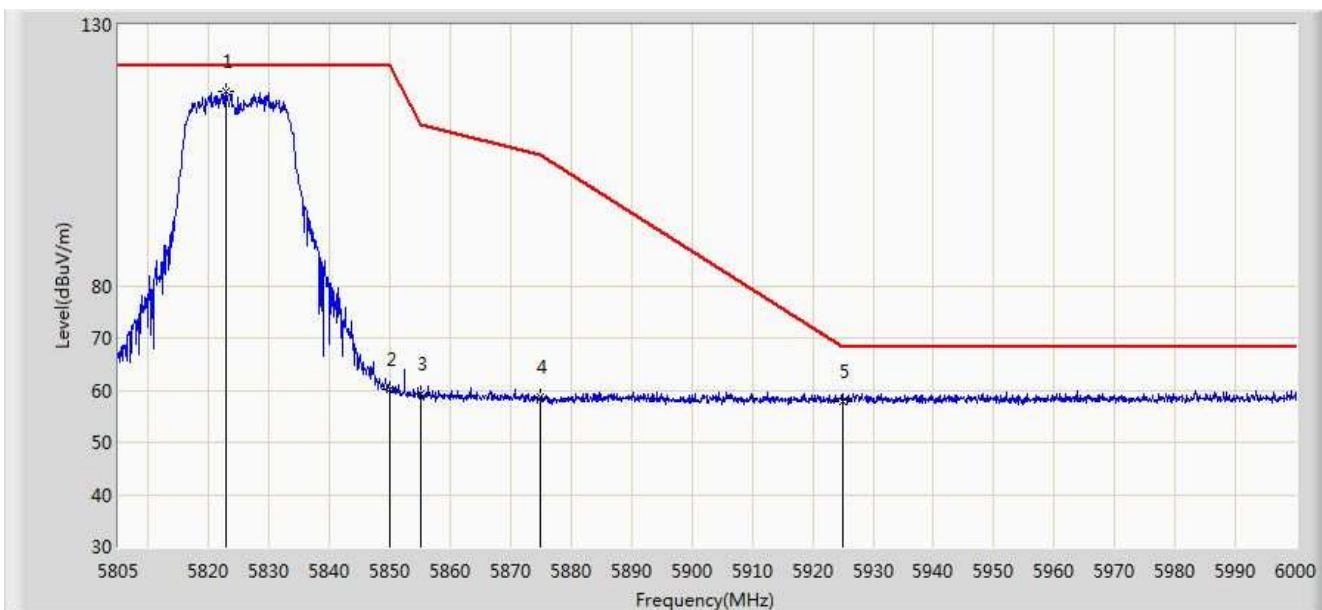


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.745	117.315	111.740	N/A	N/A	5.574	PK
2			5850.000	60.031	54.305	-62.169	122.200	5.726	PK
3			5855.000	59.385	53.639	-51.415	110.800	5.746	PK
4			5875.000	58.680	52.860	-46.520	105.200	5.820	PK
5			5925.000	57.941	51.975	-10.259	68.200	5.967	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

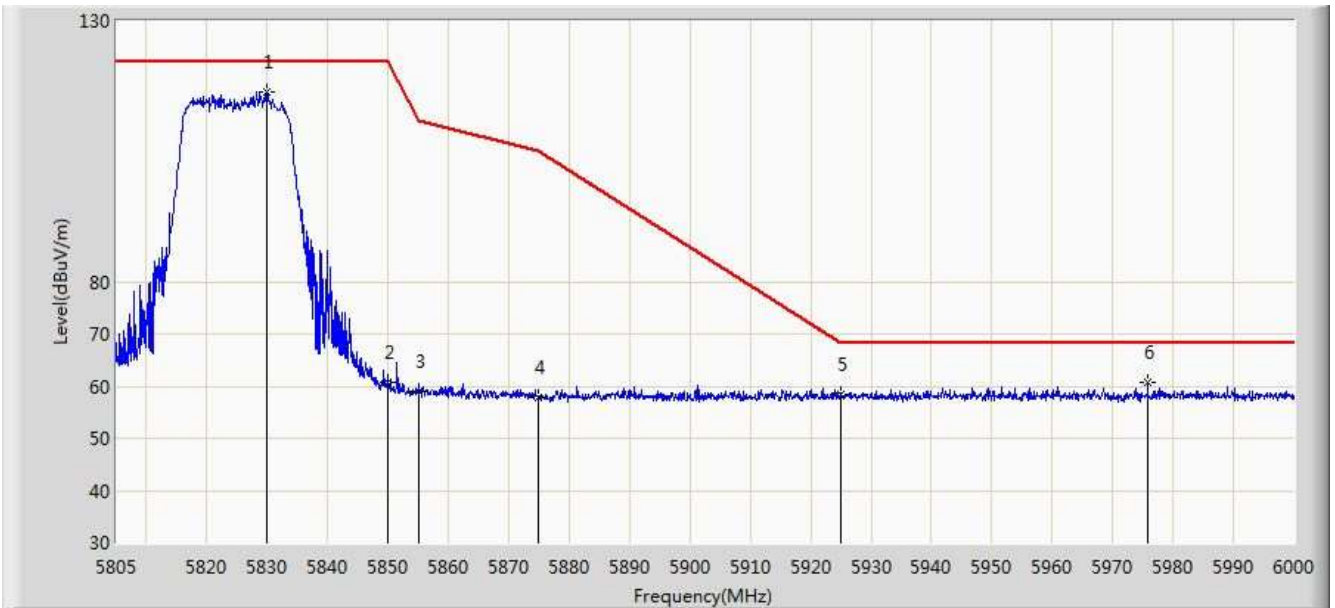


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.960	116.395	110.778	N/A	N/A	5.617	PK
2			5850.000	60.689	54.963	-61.511	122.200	5.726	PK
3			5855.000	59.006	53.260	-51.794	110.800	5.746	PK
4			5875.000	57.738	51.918	-47.462	105.200	5.820	PK
5			5925.000	58.512	52.546	-9.688	68.200	5.967	PK
6			5975.820	60.659	54.588	-7.541	68.200	6.071	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

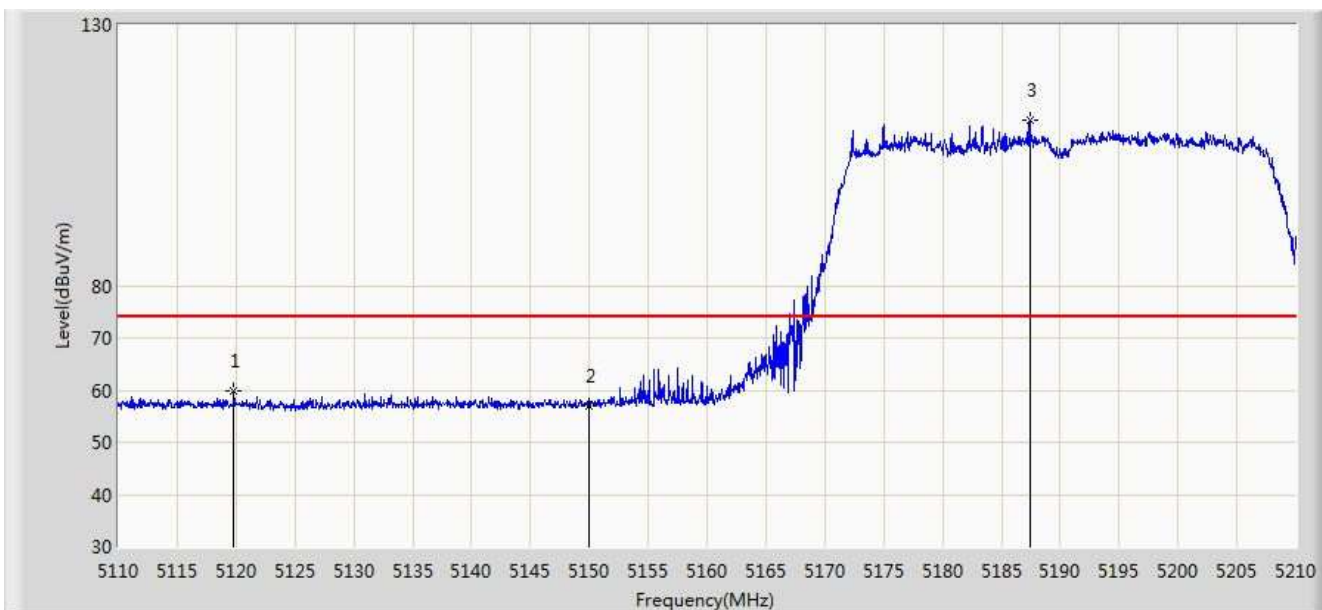


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5119.800	59.728	55.553	-14.272	74.000	4.174	PK
2			5150.000	57.097	52.928	-16.903	74.000	4.170	PK
3		*	5187.400	111.625	107.582	N/A	N/A	4.043	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

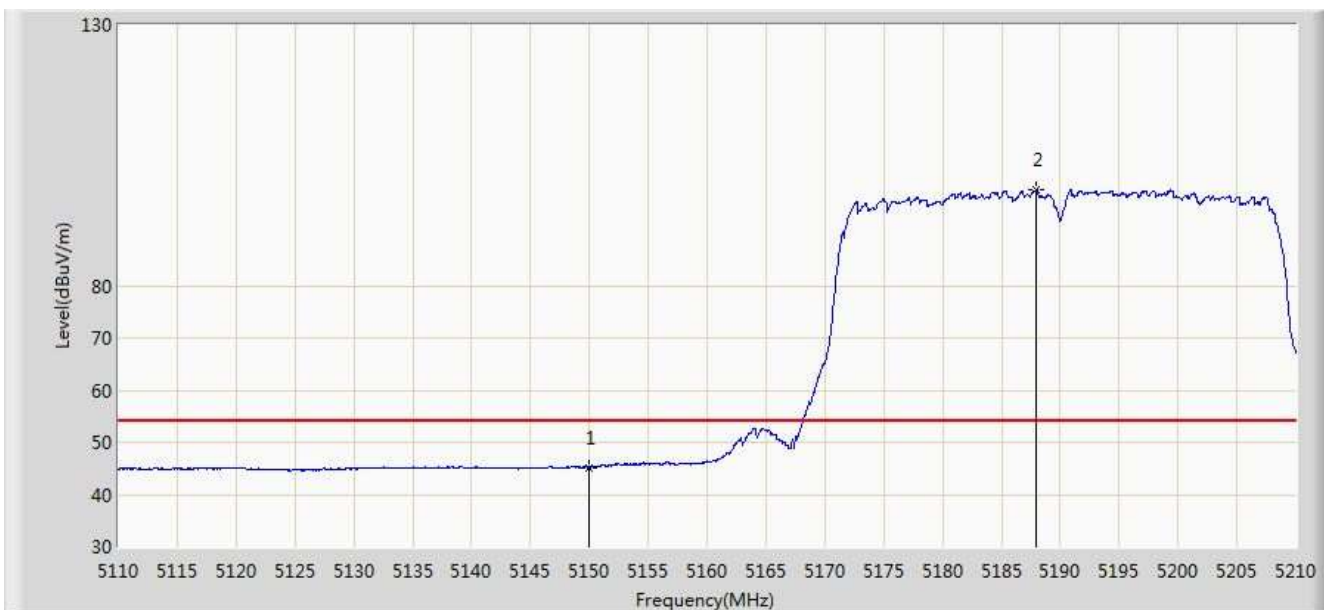


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.183	41.014	-8.817	54.000	4.170	AV
2		*	5188.000	98.387	94.346	N/A	N/A	4.041	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

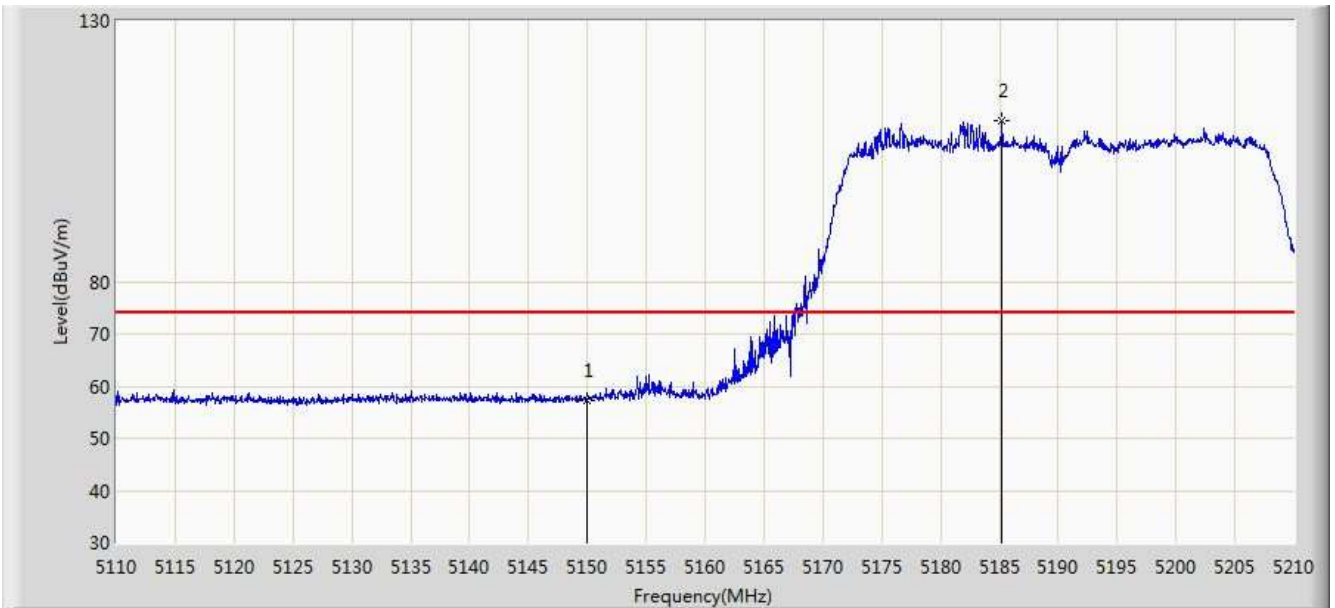


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	57.366	53.197	-16.634	74.000	4.170	PK
2		*	5185.250	110.824	106.774	N/A	N/A	4.050	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

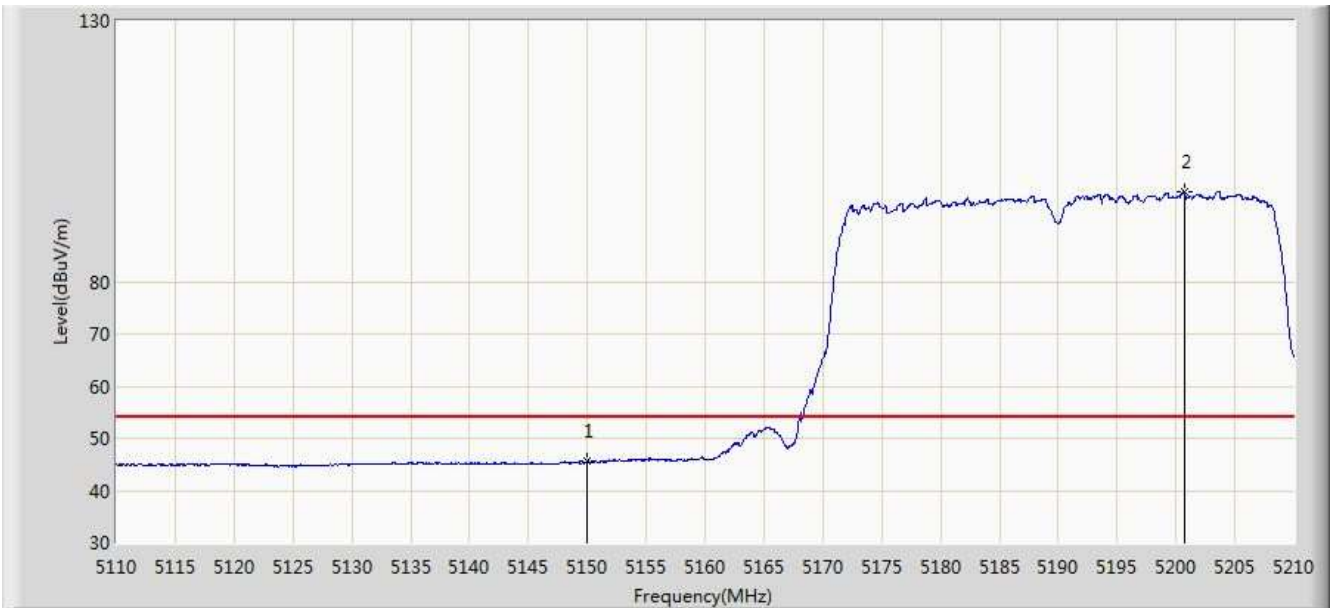


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.540	41.371	-8.460	54.000	4.170	AV
2		*	5200.750	97.147	93.151	N/A	N/A	3.996	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

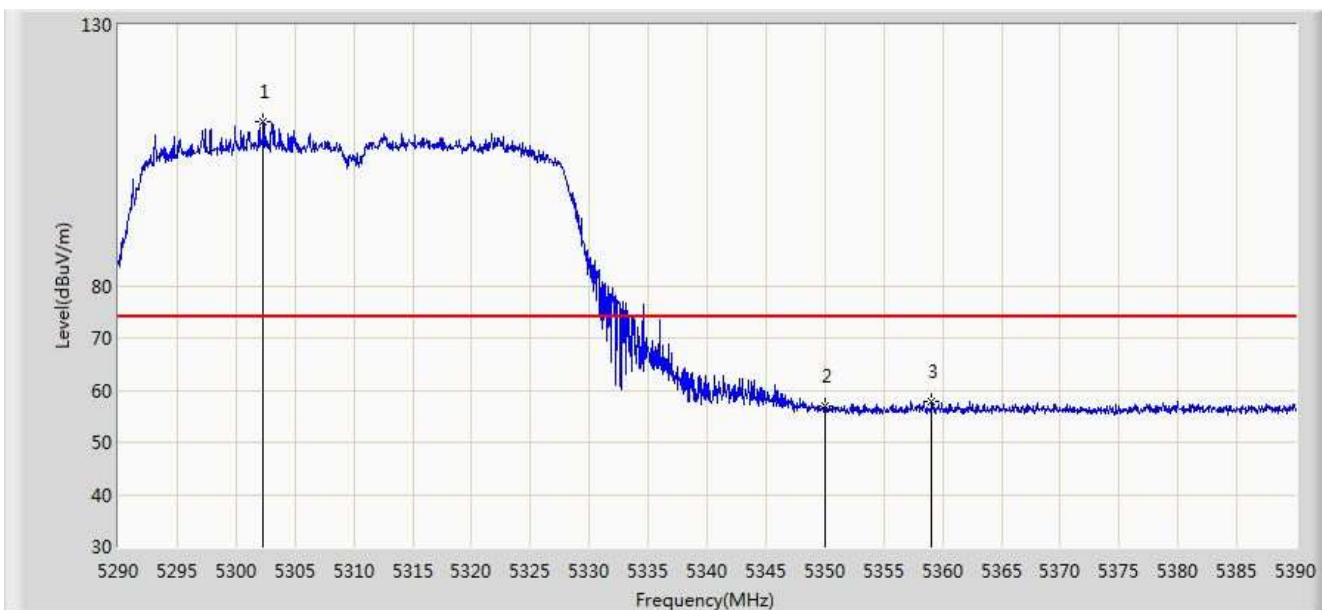


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.300	111.543	107.728	N/A	N/A	3.815	PK
2			5350.000	56.916	53.011	-17.084	74.000	3.904	PK
3			5359.100	57.879	53.958	-16.121	74.000	3.922	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

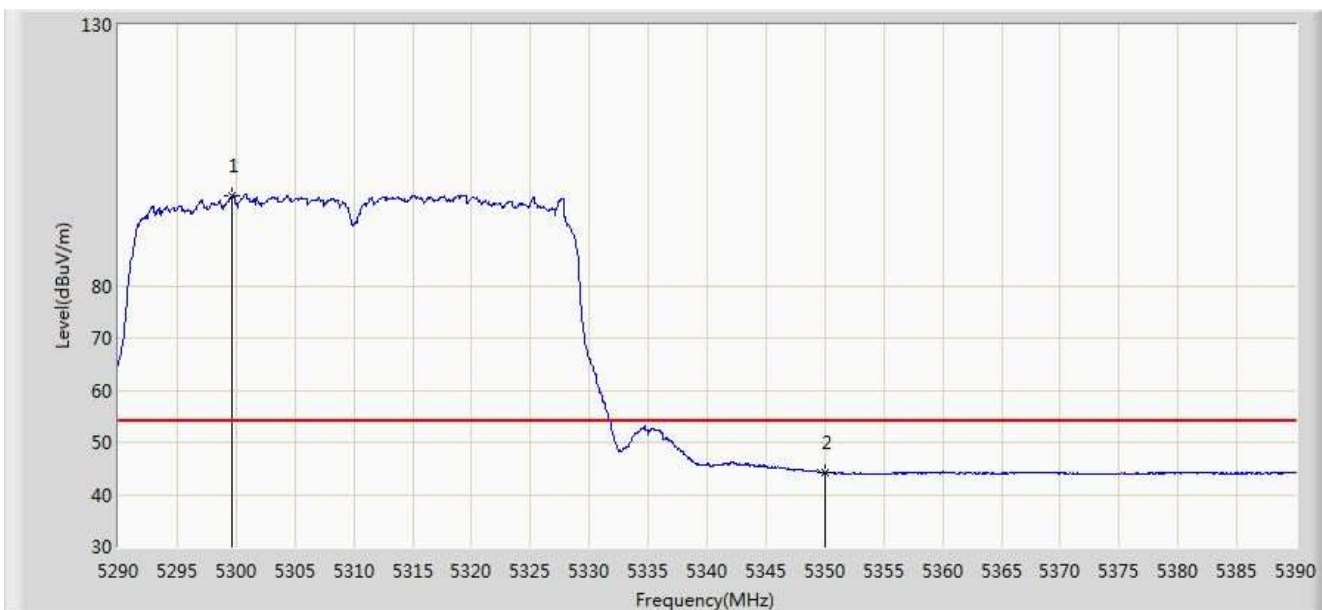


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.650	97.244	93.431	N/A	N/A	3.813	AV
2			5350.000	44.182	40.277	-9.818	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

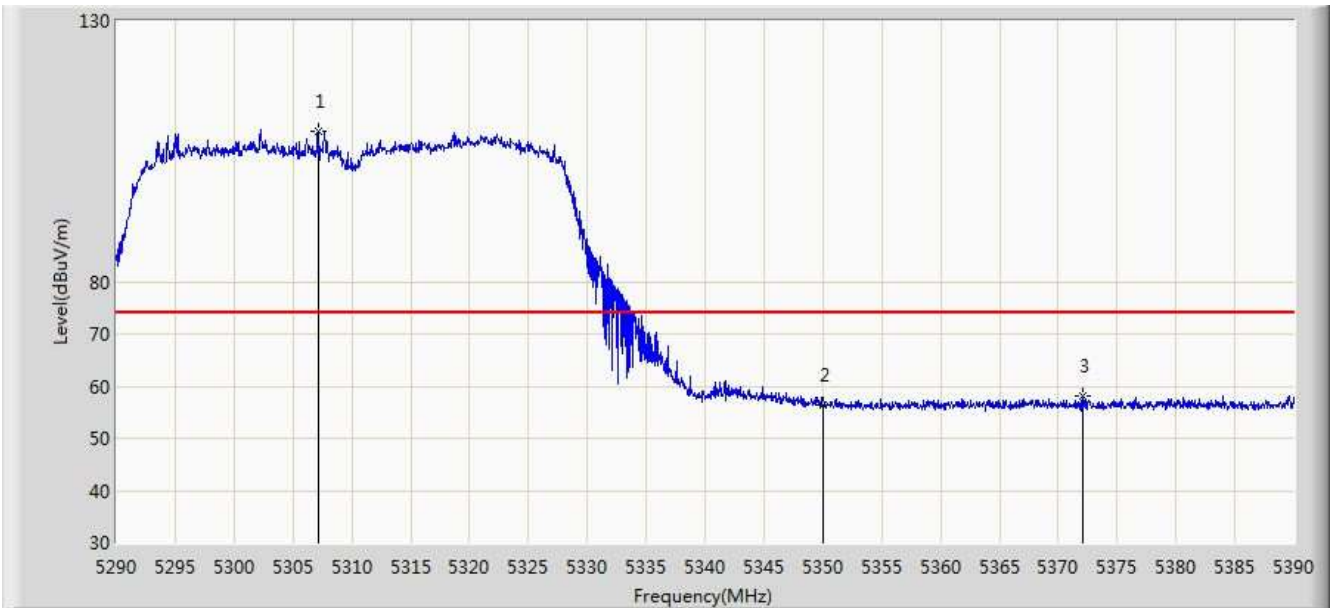


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.150	108.980	105.155	N/A	N/A	3.825	PK
2			5350.000	56.322	52.417	-17.678	74.000	3.904	PK
3			5372.050	57.992	54.047	-16.008	74.000	3.945	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

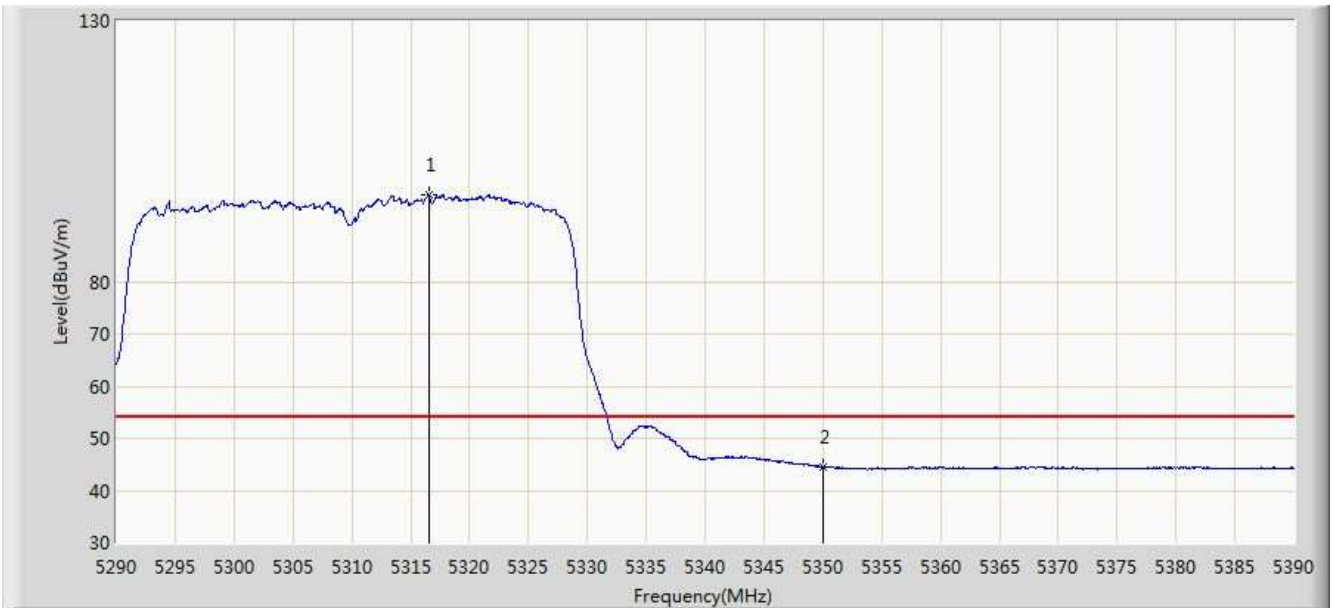


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.550	96.744	92.902	N/A	N/A	3.842	AV
2			5350.000	44.552	40.647	-9.448	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

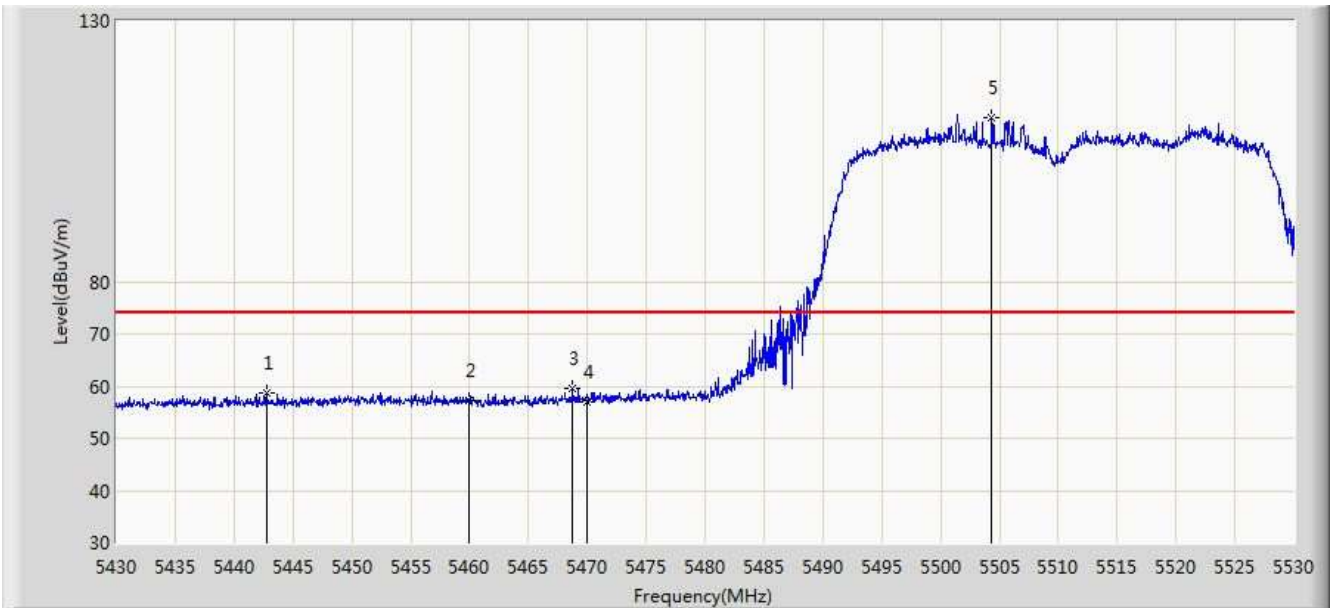


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5442.750	58.762	54.630	-15.238	74.000	4.133	PK
2			5460.000	57.320	53.140	-16.680	74.000	4.180	PK
3			5468.750	59.679	55.479	-14.321	74.000	4.199	PK
4			5470.000	56.987	52.785	-17.013	74.000	4.202	PK
5		*	5504.350	111.522	107.237	N/A	N/A	4.284	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 20:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

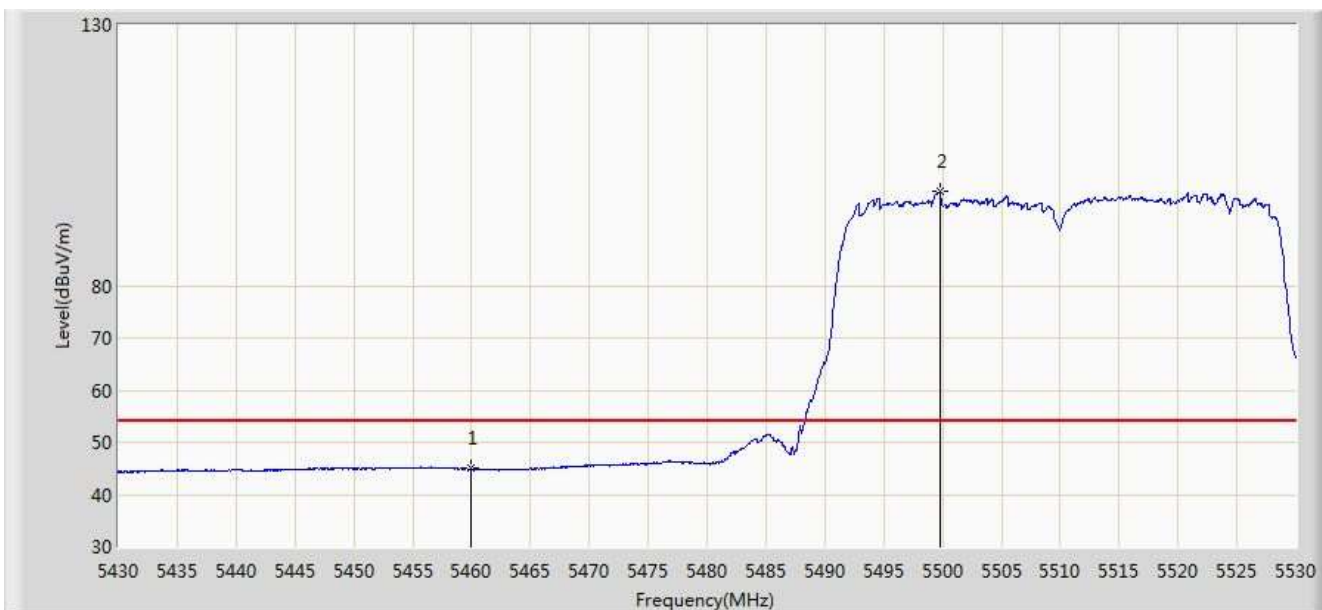


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.968	40.788	-9.032	54.000	4.180	AV
2		*	5499.800	98.148	93.877	N/A	N/A	4.271	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

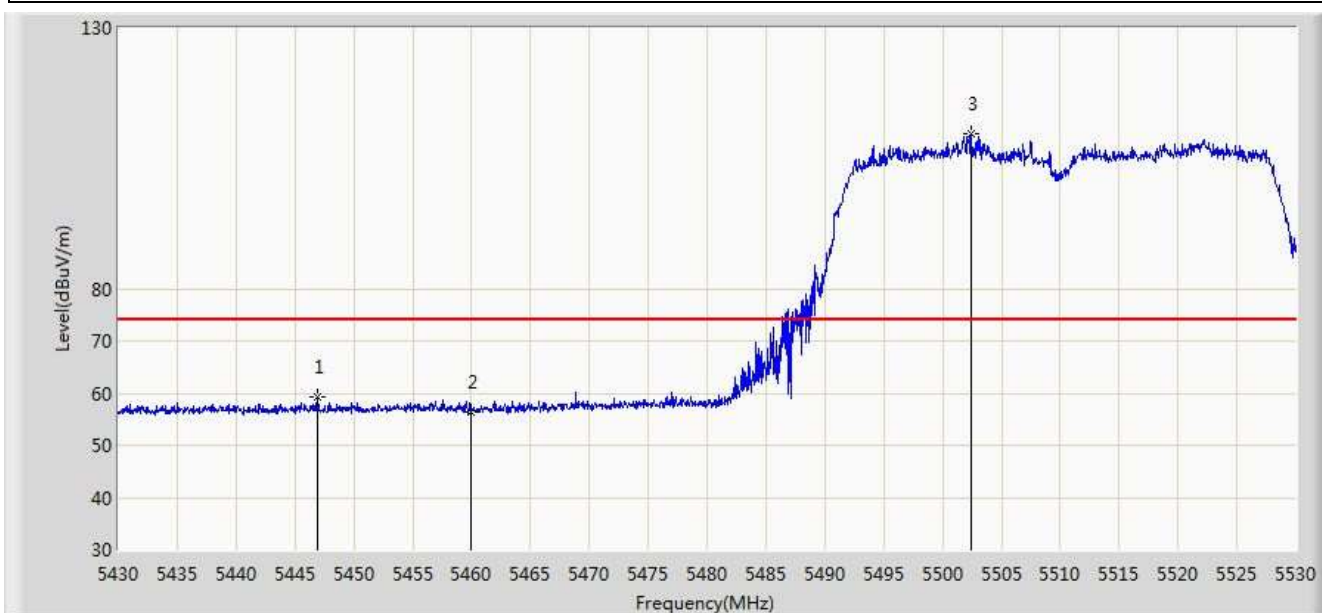


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.950	59.166	55.021	-14.834	74.000	4.145	PK
2			5460.000	56.416	52.236	-17.584	74.000	4.180	PK
3		*	5502.400	109.593	105.314	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

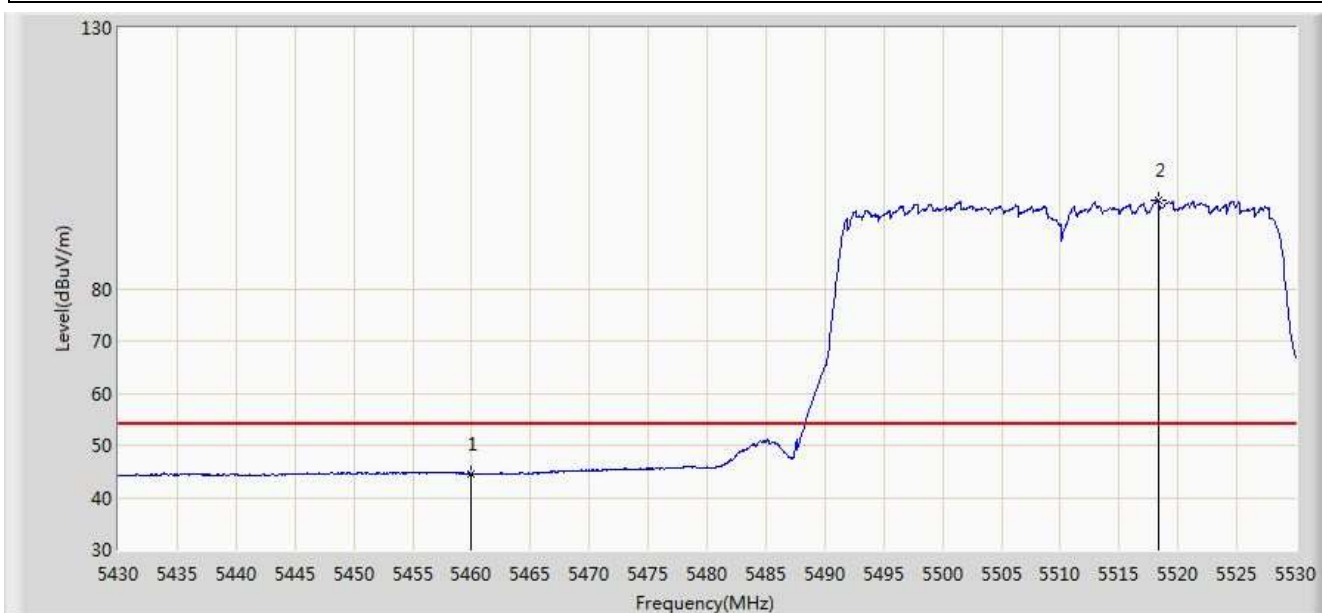


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.511	40.331	-9.489	54.000	4.180	AV
2		*	5518.350	96.952	92.626	N/A	N/A	4.326	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

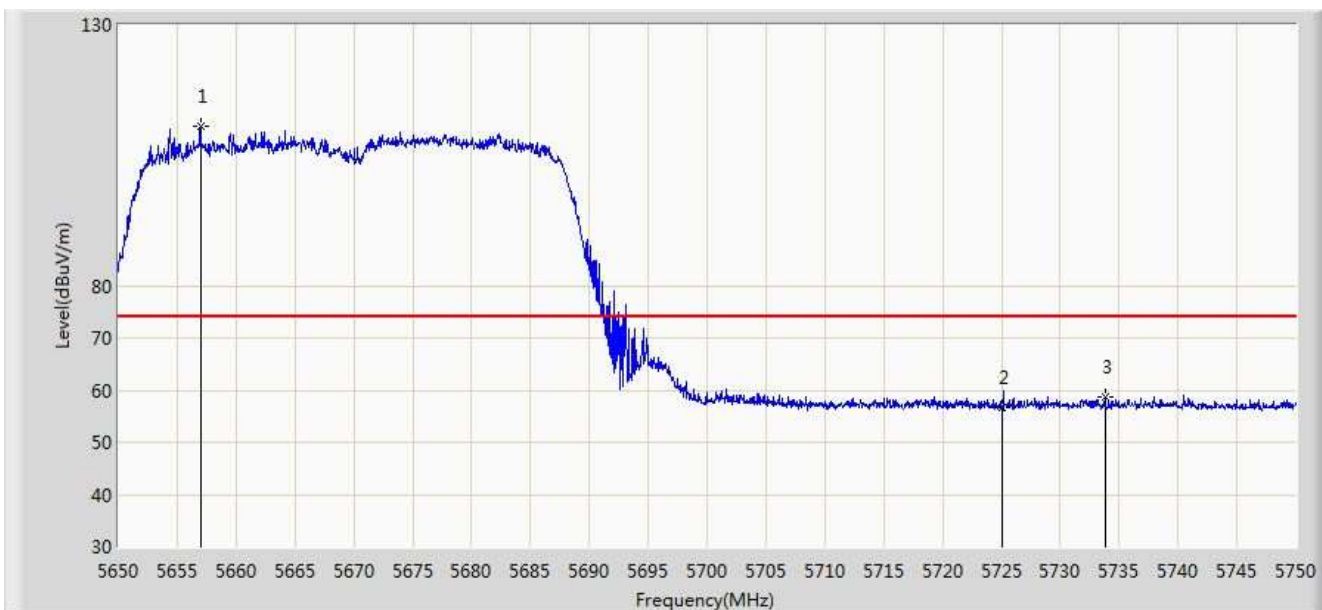


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5657.000	110.537	105.842	N/A	N/A	4.695	PK
2			5725.000	56.634	51.605	-17.366	74.000	5.029	PK
3			5733.800	58.815	53.730	-15.185	74.000	5.085	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

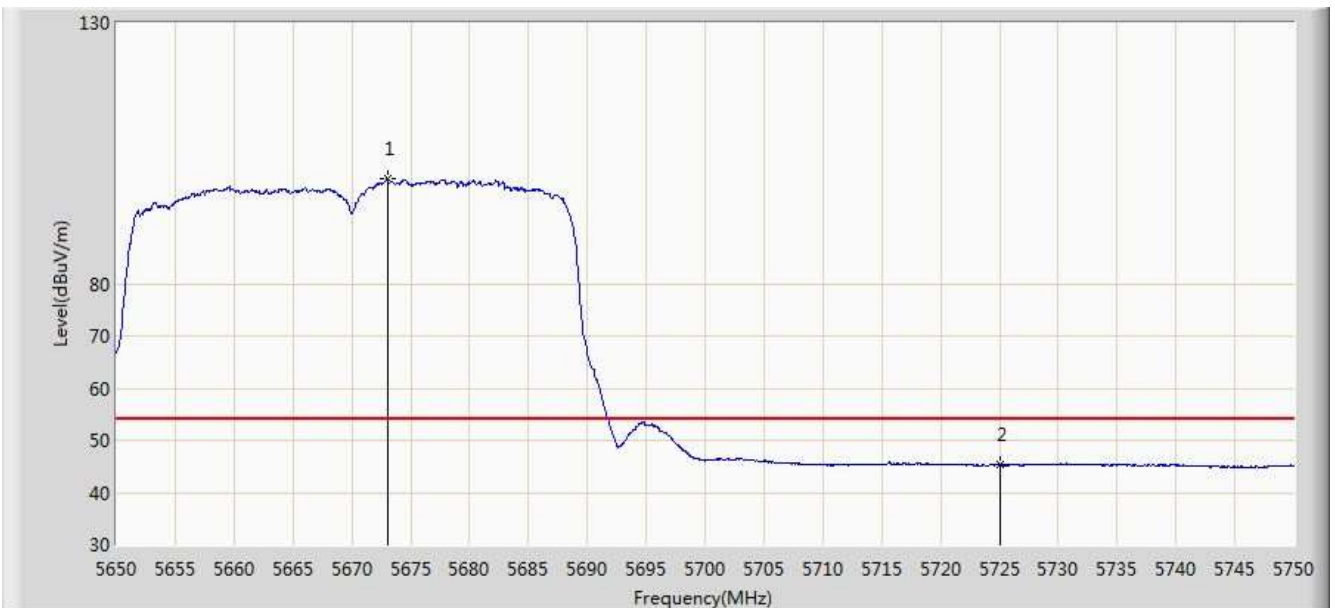


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.000	100.056	95.297	N/A	N/A	4.759	AV
2			5725.000	45.386	40.357	-8.614	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

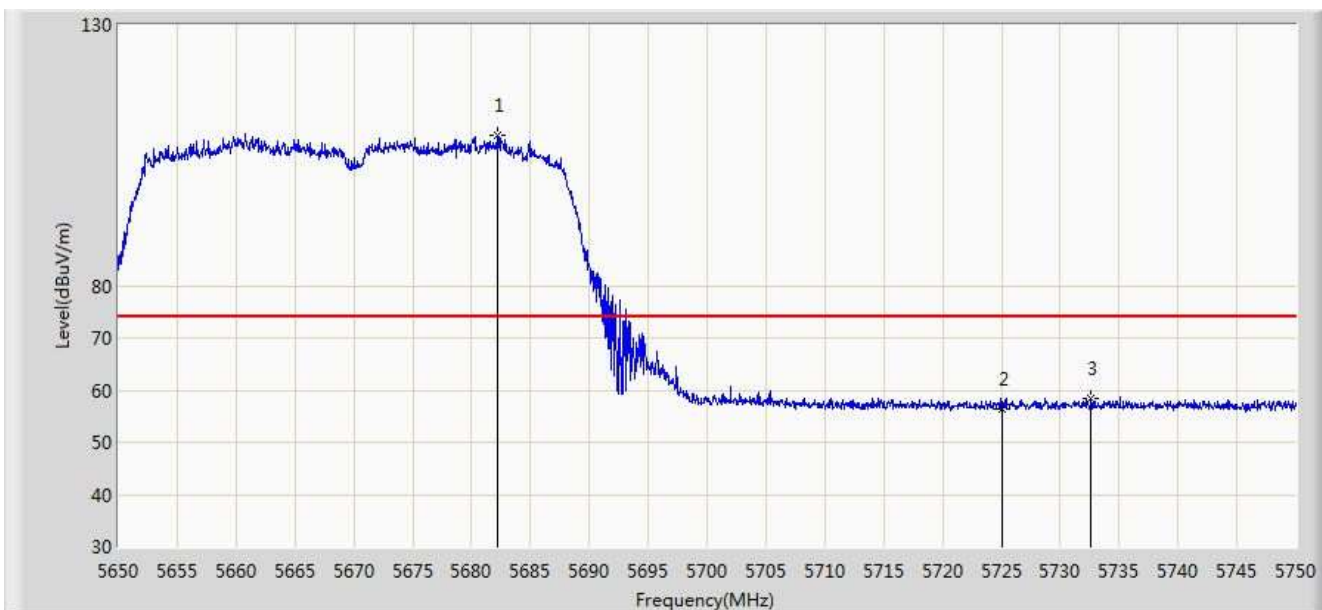


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5682.250	108.850	104.054	N/A	N/A	4.797	PK
2			5725.000	56.372	51.343	-17.628	74.000	5.029	PK
3			5732.600	58.478	53.401	-15.522	74.000	5.077	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

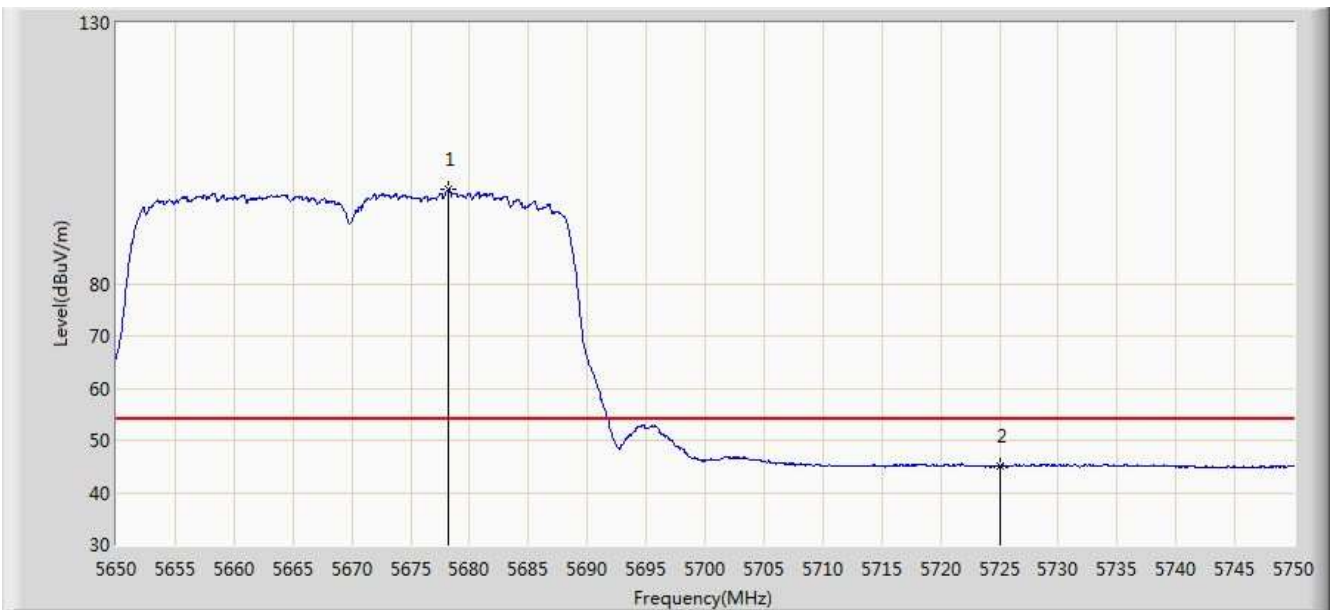


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5678.250	98.138	93.358	N/A	N/A	4.780	AV
2			5725.000	45.033	40.004	-8.967	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

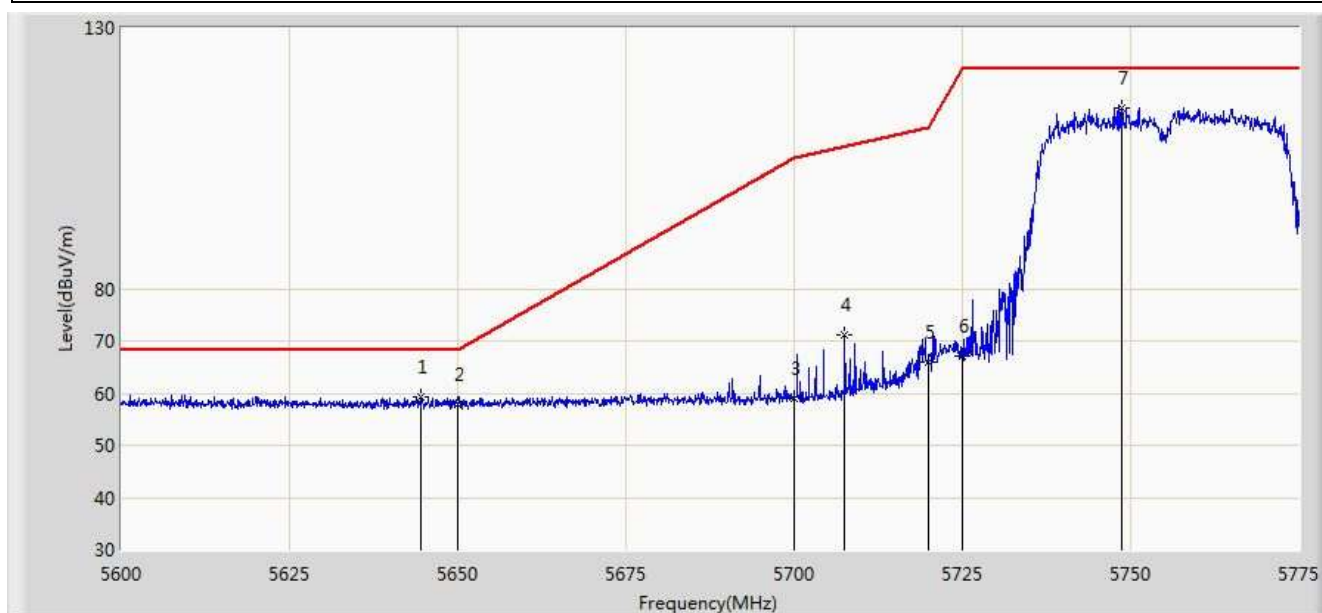


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.625	59.351	54.698	-8.849	68.200	4.654	PK
2			5650.000	57.889	53.218	-10.311	68.200	4.671	PK
3			5700.000	58.988	54.110	-46.212	105.200	4.878	PK
4			5707.538	71.154	66.236	-36.159	107.313	4.918	PK
5			5720.000	66.035	61.038	-44.765	110.800	4.997	PK
6			5725.000	67.152	62.123	-55.048	122.200	5.029	PK
7		*	5748.575	114.652	109.477	N/A	N/A	5.175	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

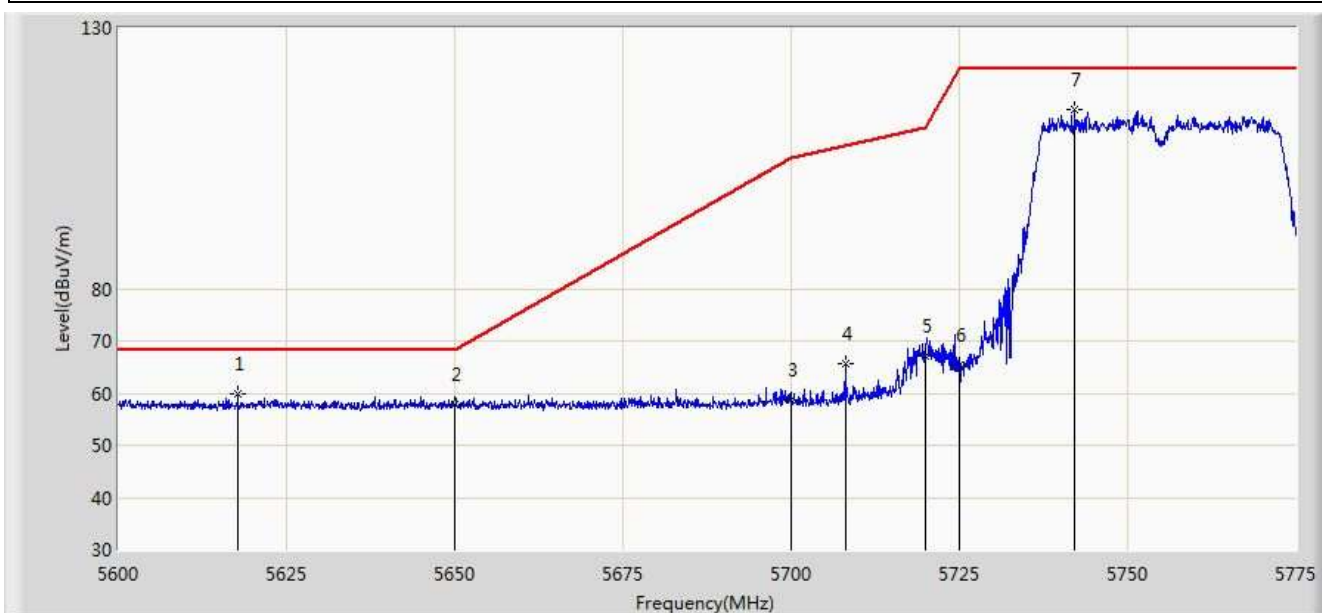


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5617.763	59.714	55.140	-8.486	68.200	4.575	PK
2			5650.000	57.812	53.141	-10.388	68.200	4.671	PK
3			5700.000	58.645	53.767	-46.555	105.200	4.878	PK
4			5708.062	65.704	60.783	-41.756	107.460	4.921	PK
5			5720.000	67.195	62.198	-43.605	110.800	4.997	PK
6			5725.000	65.481	60.452	-56.719	122.200	5.029	PK
7		*	5742.100	114.227	109.089	N/A	N/A	5.138	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

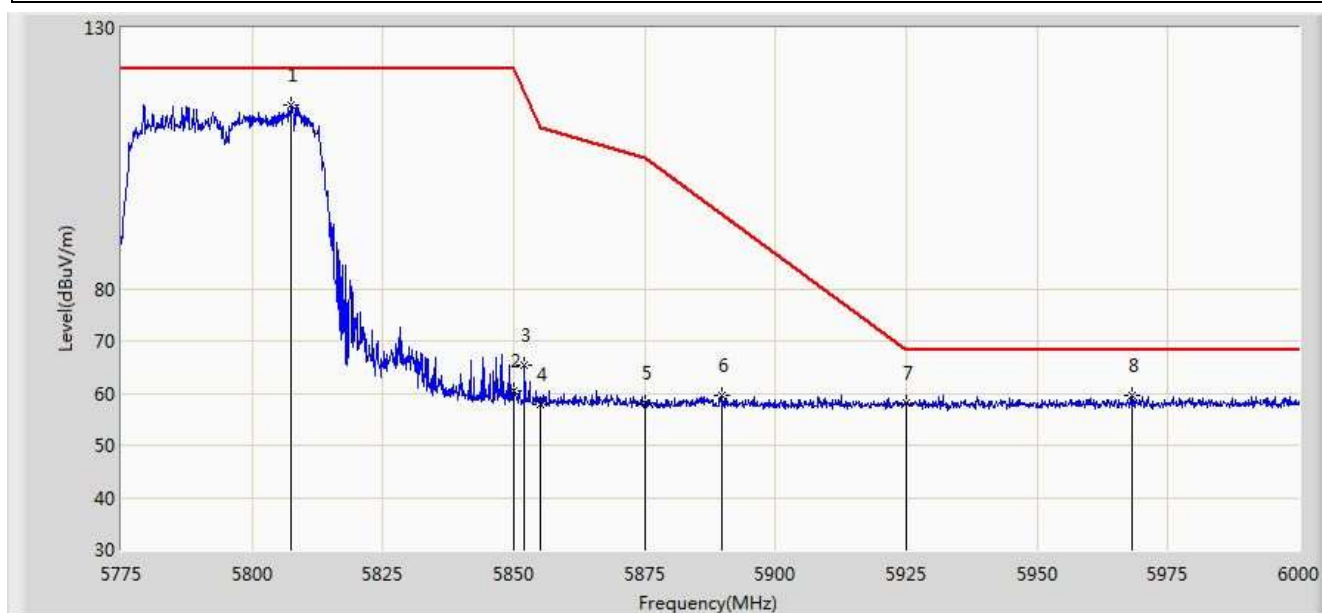


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5807.400	115.284	109.798	N/A	N/A	5.486	PK
2			5850.000	60.497	54.771	-61.703	122.200	5.726	PK
3			5852.062	65.362	59.628	-52.135	117.497	5.734	PK
4			5855.000	57.817	52.071	-52.983	110.800	5.746	PK
5			5875.000	58.231	52.411	-46.969	105.200	5.820	PK
6			5889.638	59.671	53.801	-34.664	94.335	5.870	PK
7			5925.000	58.040	52.074	-10.160	68.200	5.967	PK
8			5968.275	59.438	53.380	-8.762	68.200	6.058	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

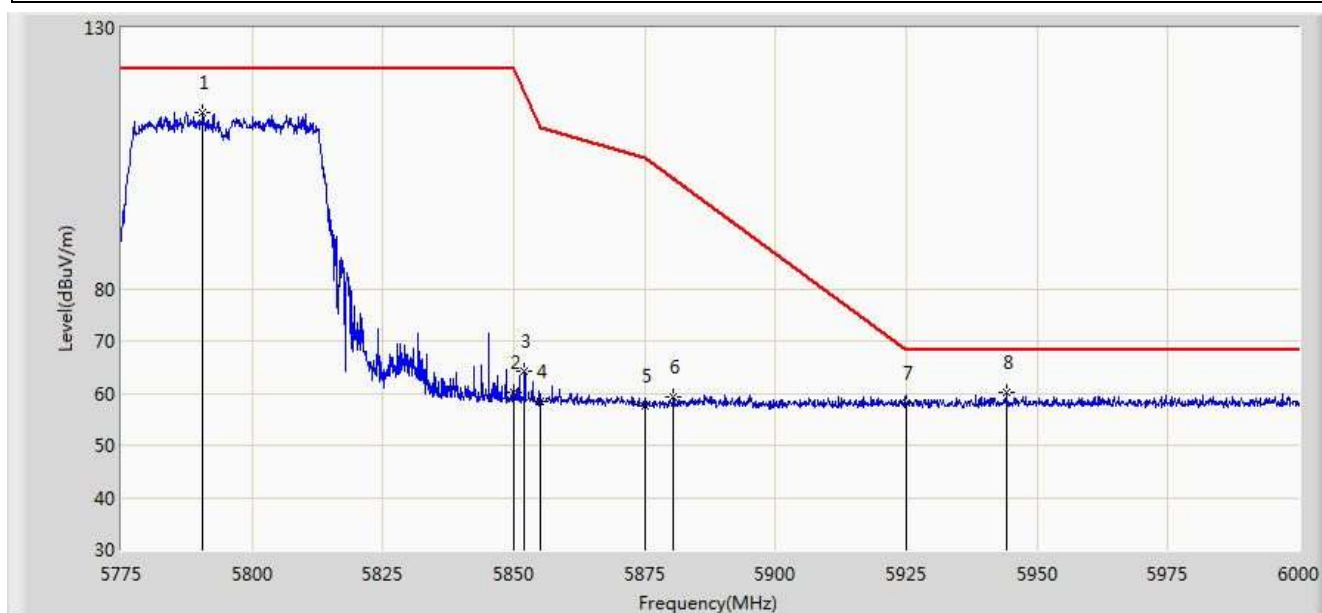


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5790.638	113.781	108.386	N/A	N/A	5.396	PK
2			5850.000	60.115	54.389	-62.085	122.200	5.726	PK
3			5852.062	64.181	58.447	-53.316	117.497	5.734	PK
4			5855.000	58.503	52.757	-52.297	110.800	5.746	PK
5			5875.000	57.576	51.756	-47.624	105.200	5.820	PK
6			5880.525	59.354	53.515	-41.742	101.096	5.839	PK
7			5925.000	58.071	52.105	-10.129	68.200	5.967	PK
8		*	5944.087	60.147	54.134	-8.053	68.200	6.012	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

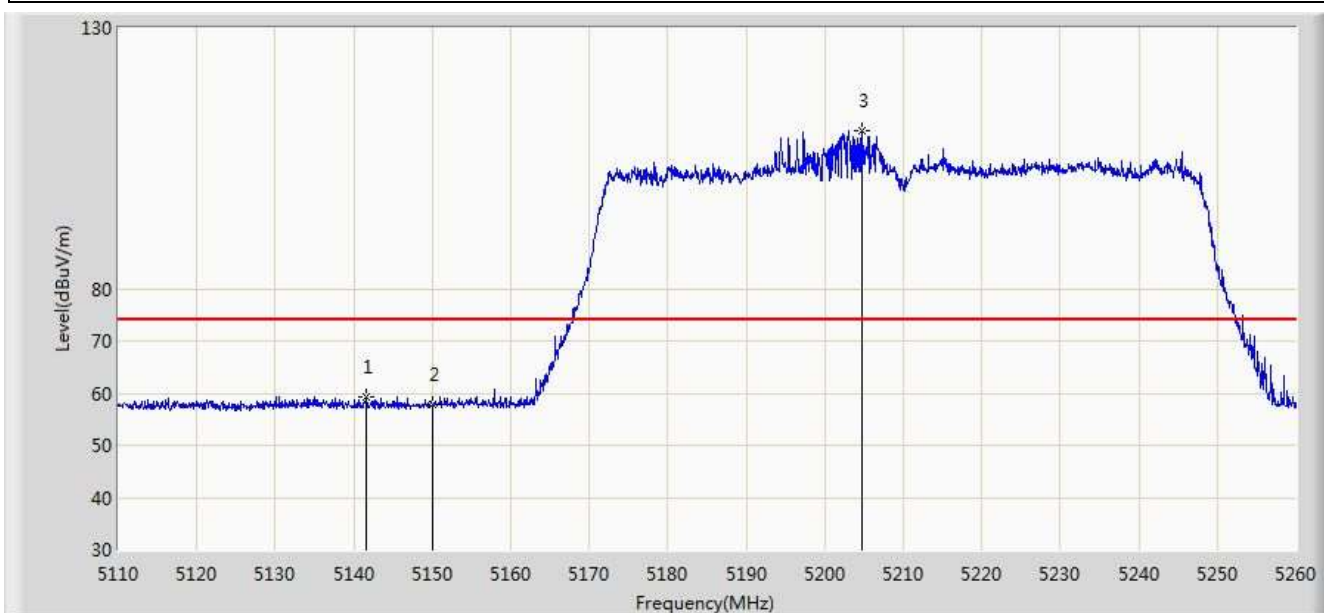


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.575	59.411	55.235	-14.589	74.000	4.176	PK
2			5150.000	57.712	53.543	-16.288	74.000	4.170	PK
3		*	5204.650	110.343	106.358	N/A	N/A	3.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

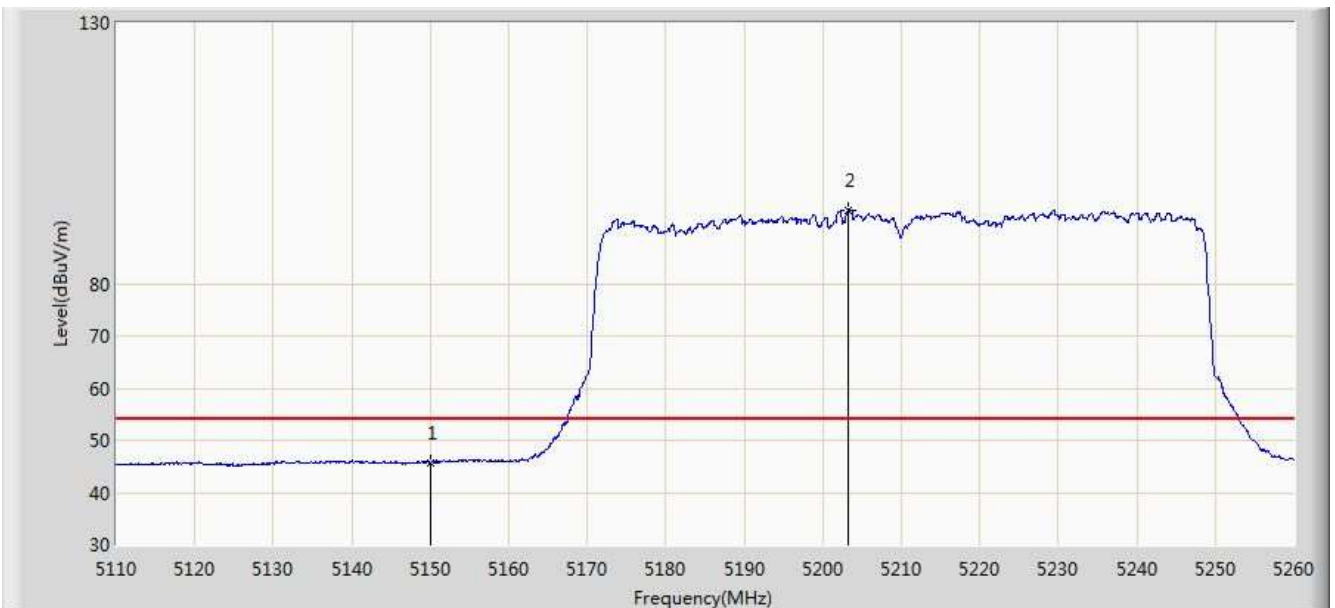


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.677	41.508	-8.323	54.000	4.170	AV
2		*	5203.225	94.186	90.197	N/A	N/A	3.988	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

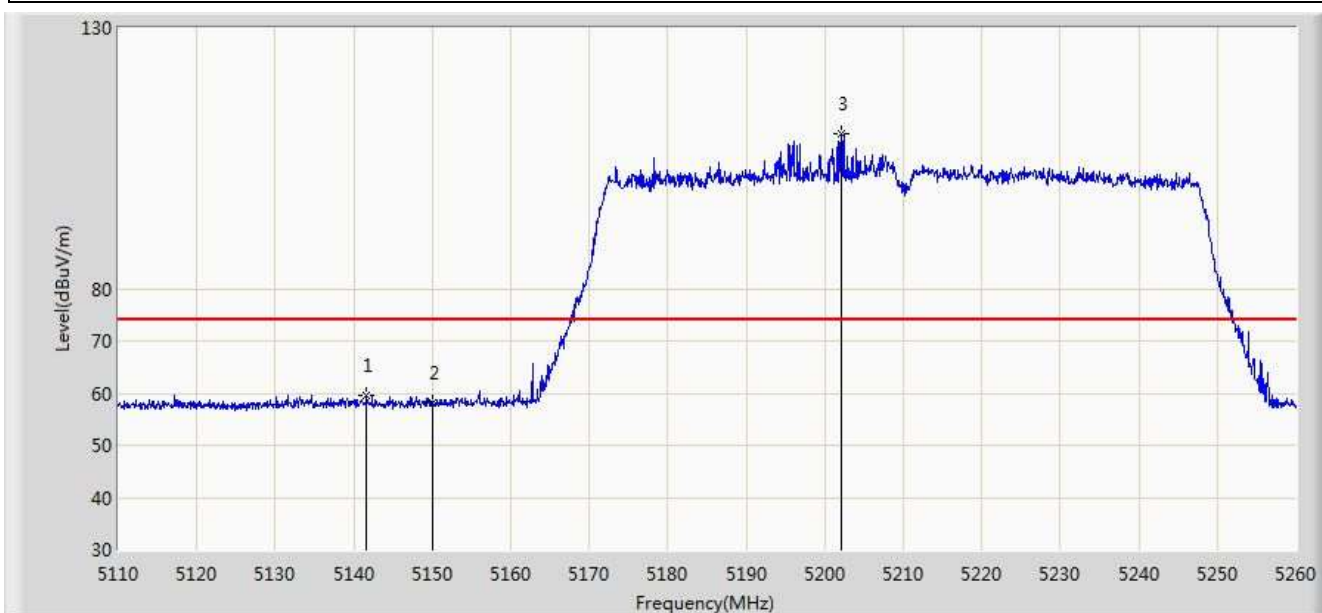


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.650	59.696	55.520	-14.304	74.000	4.176	PK
2			5150.000	58.212	54.043	-15.788	74.000	4.170	PK
3		*	5202.175	109.733	105.741	N/A	N/A	3.991	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

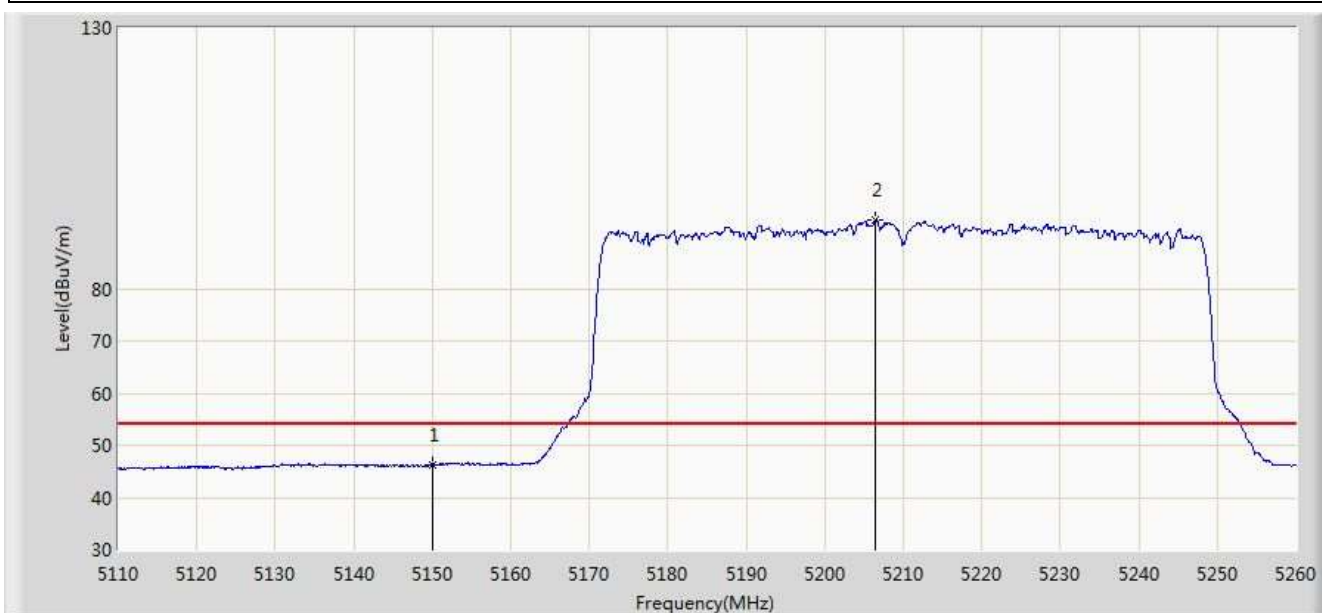


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.368	42.199	-7.632	54.000	4.170	AV
2		*	5206.450	93.259	89.280	N/A	N/A	3.980	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

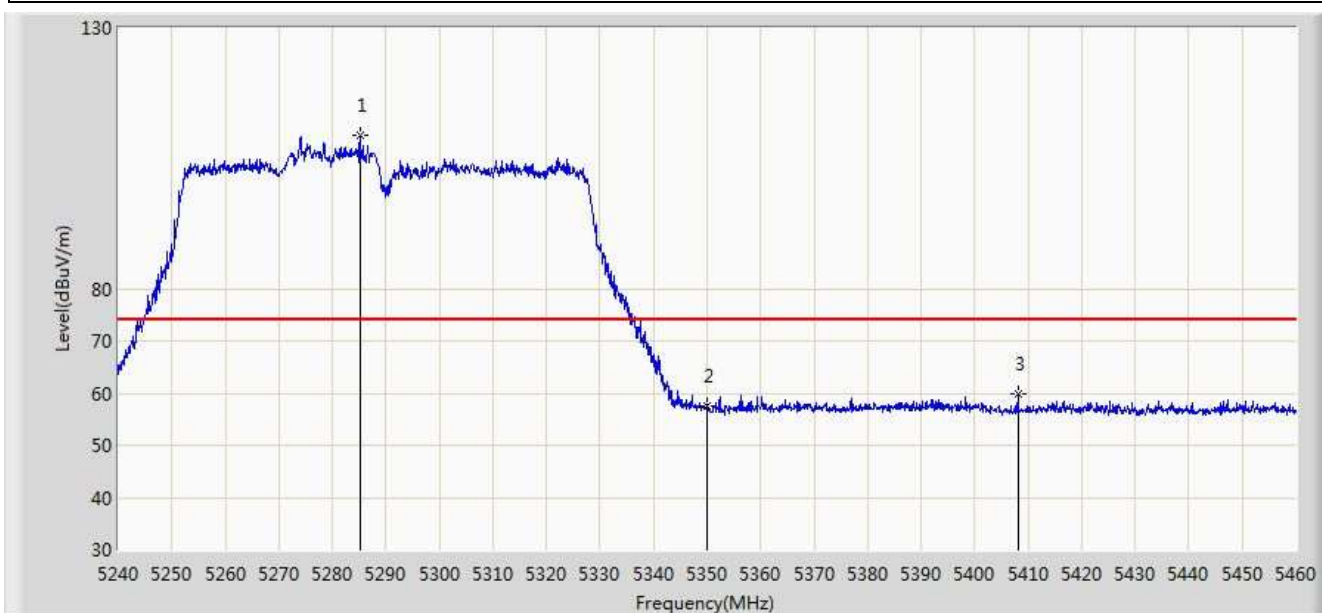


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5285.100	109.552	105.729	N/A	N/A	3.823	PK
2			5350.000	57.620	53.715	-16.380	74.000	3.904	PK
3			5408.080	59.875	55.852	-14.125	74.000	4.023	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

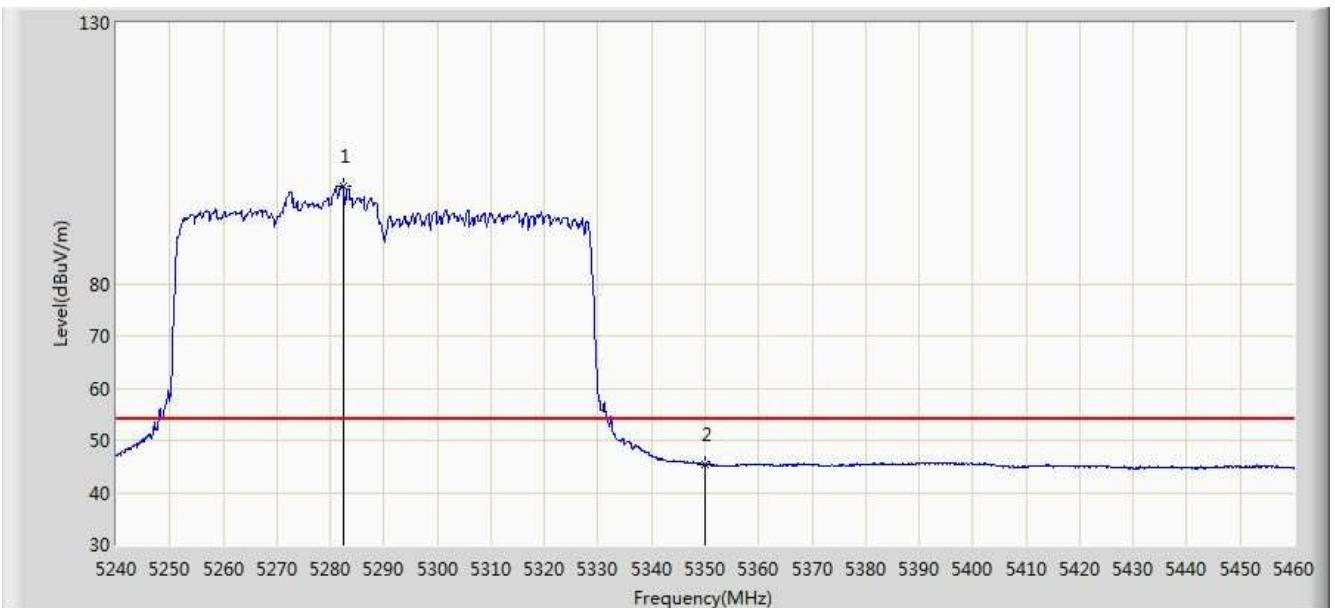


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5282.460	98.808	94.983	N/A	N/A	3.825	AV
2			5350.000	45.218	41.313	-8.782	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

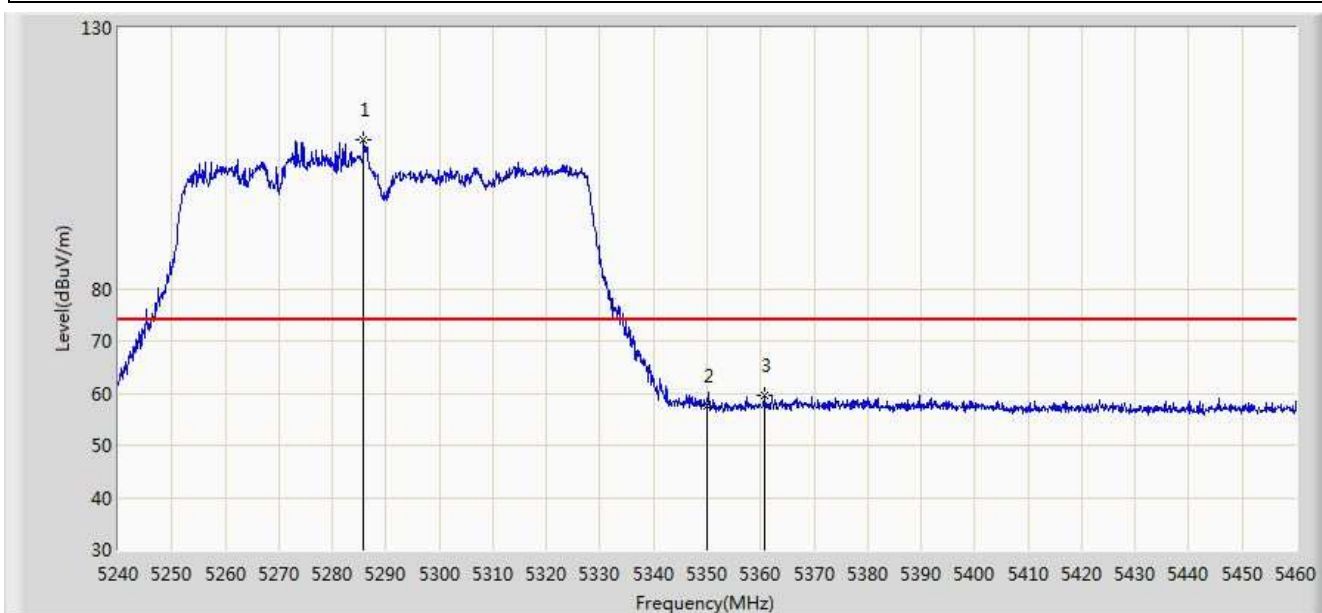


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5285.870	108.612	104.789	N/A	N/A	3.823	PK
2			5350.000	57.569	53.664	-16.431	74.000	3.904	PK
3			5360.780	59.668	55.744	-14.332	74.000	3.923	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

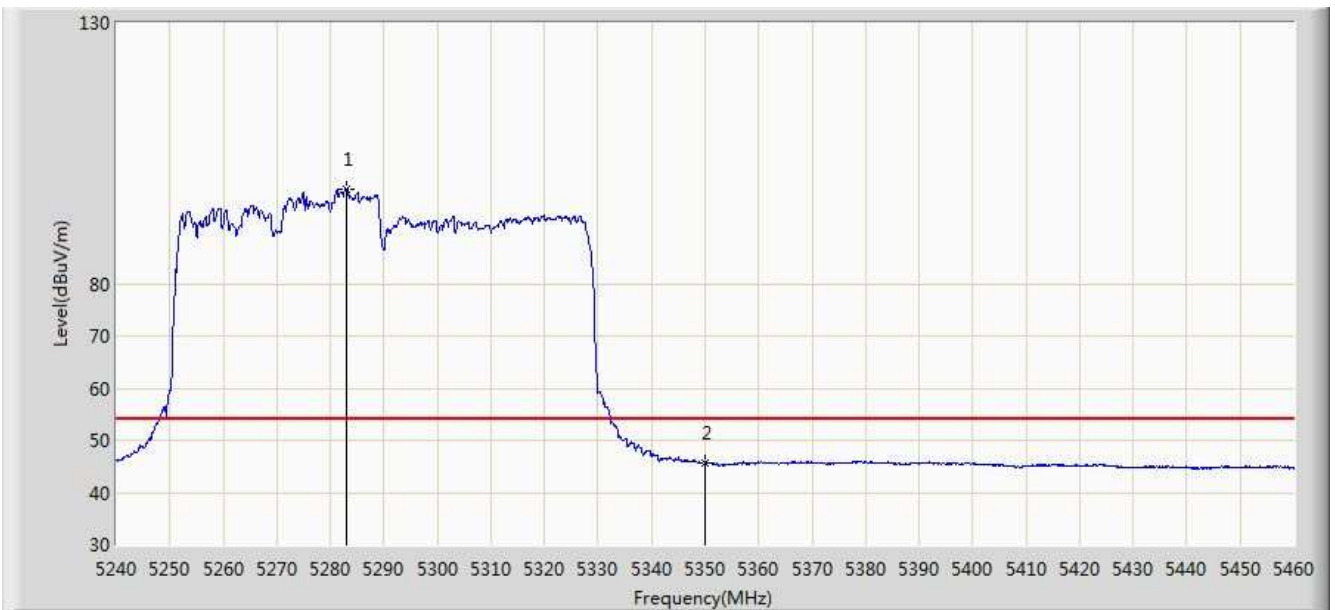


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5283.010	98.206	94.381	N/A	N/A	3.825	AV
2			5350.000	45.566	41.661	-8.434	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

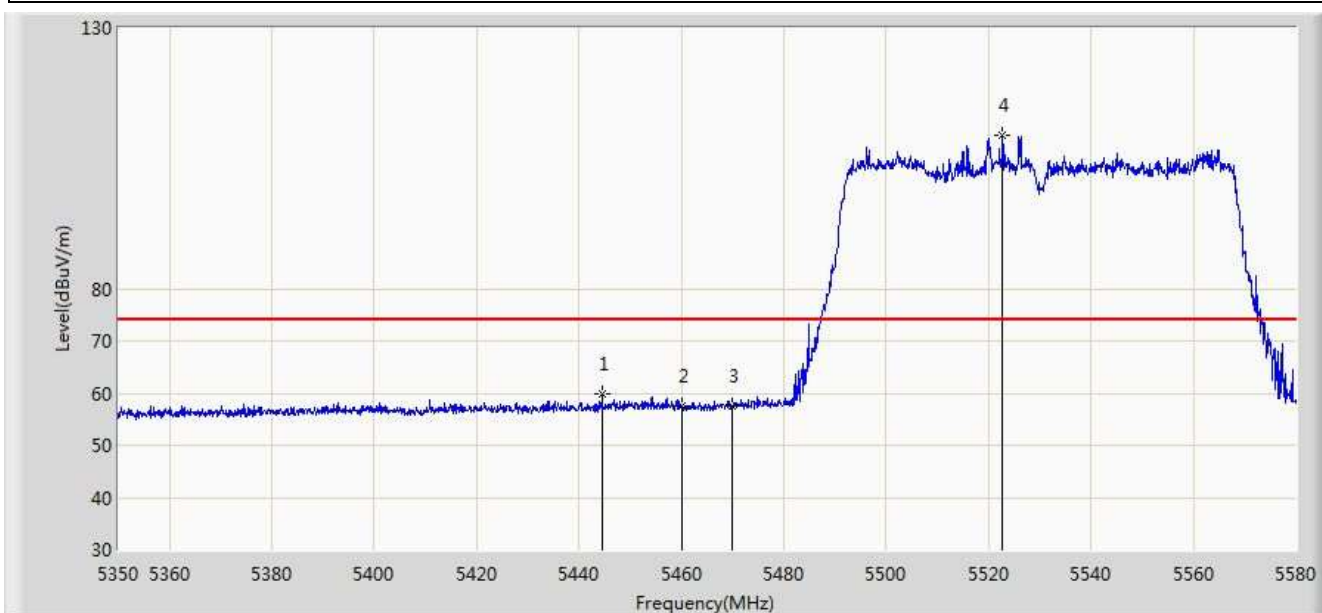


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.530	59.938	55.800	-14.062	74.000	4.138	PK
2			5460.000	57.516	53.336	-16.484	74.000	4.180	PK
3			5470.000	57.597	53.395	-16.403	74.000	4.202	PK
4		*	5522.730	109.514	105.175	N/A	N/A	4.339	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 21:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

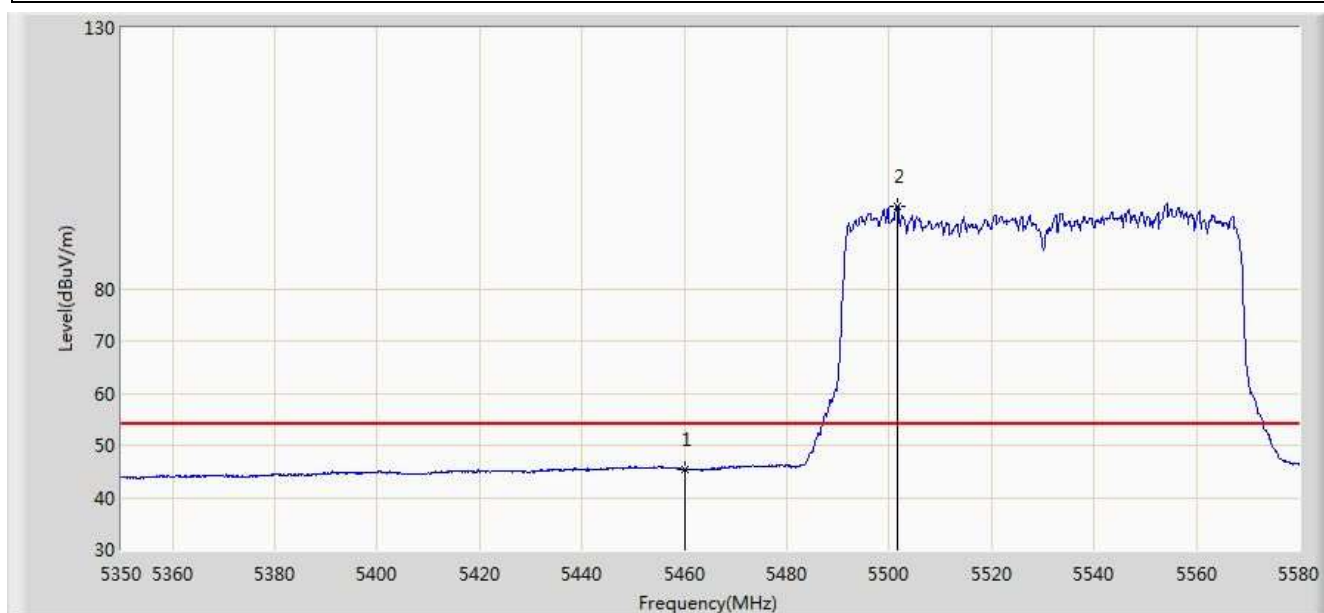


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.396	41.216	-8.604	54.000	4.180	AV
2		*	5501.570	95.836	91.559	N/A	N/A	4.277	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 22:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

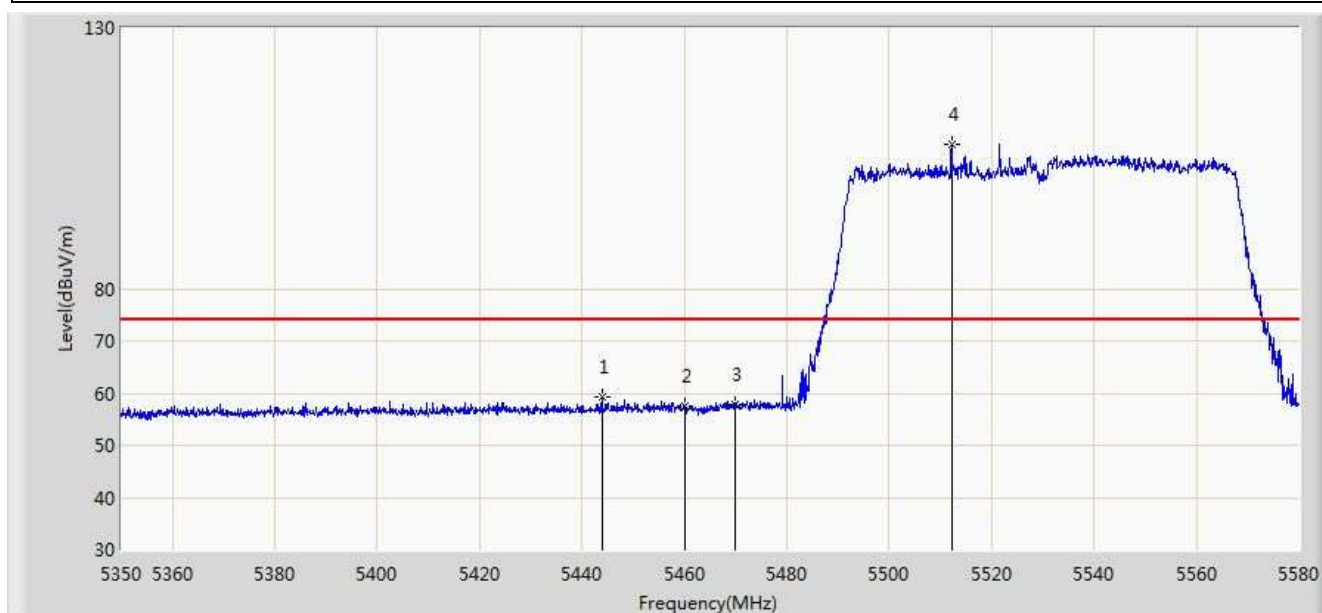


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.840	59.360	55.224	-14.640	74.000	4.136	PK
2			5460.000	57.426	53.246	-16.574	74.000	4.180	PK
3			5470.000	57.725	53.523	-16.275	74.000	4.202	PK
4		*	5512.150	107.773	103.465	N/A	N/A	4.307	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 22:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

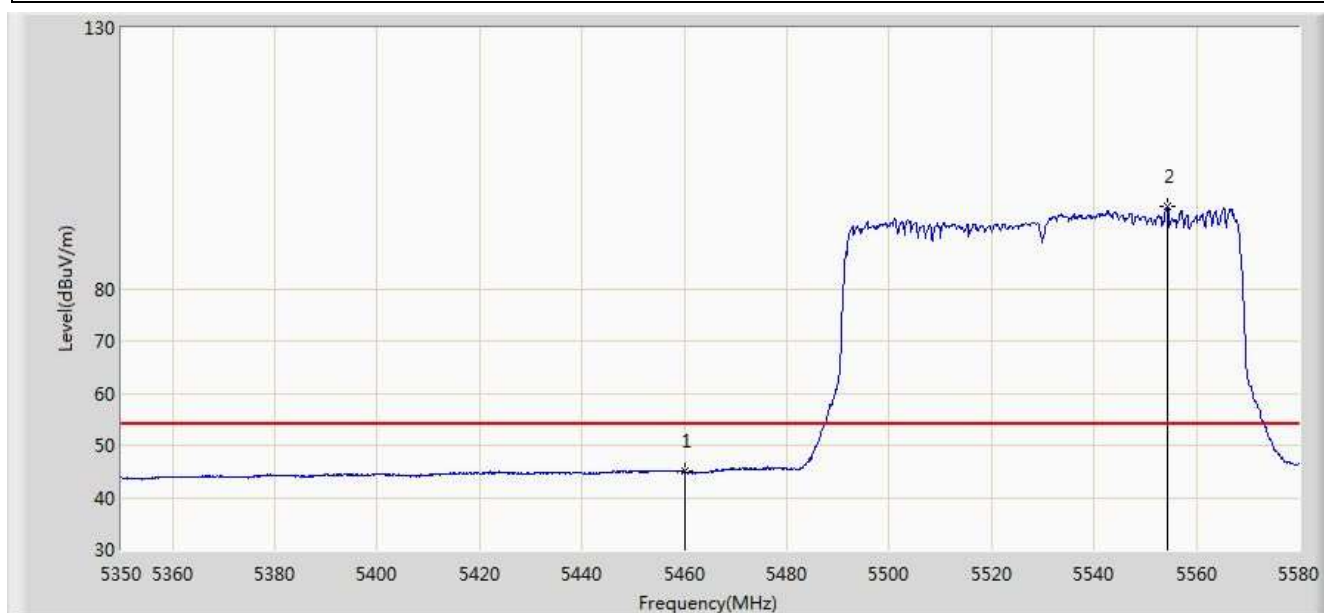


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.008	40.828	-8.992	54.000	4.180	AV
2		*	5554.470	95.680	91.250	N/A	N/A	4.430	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 22:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

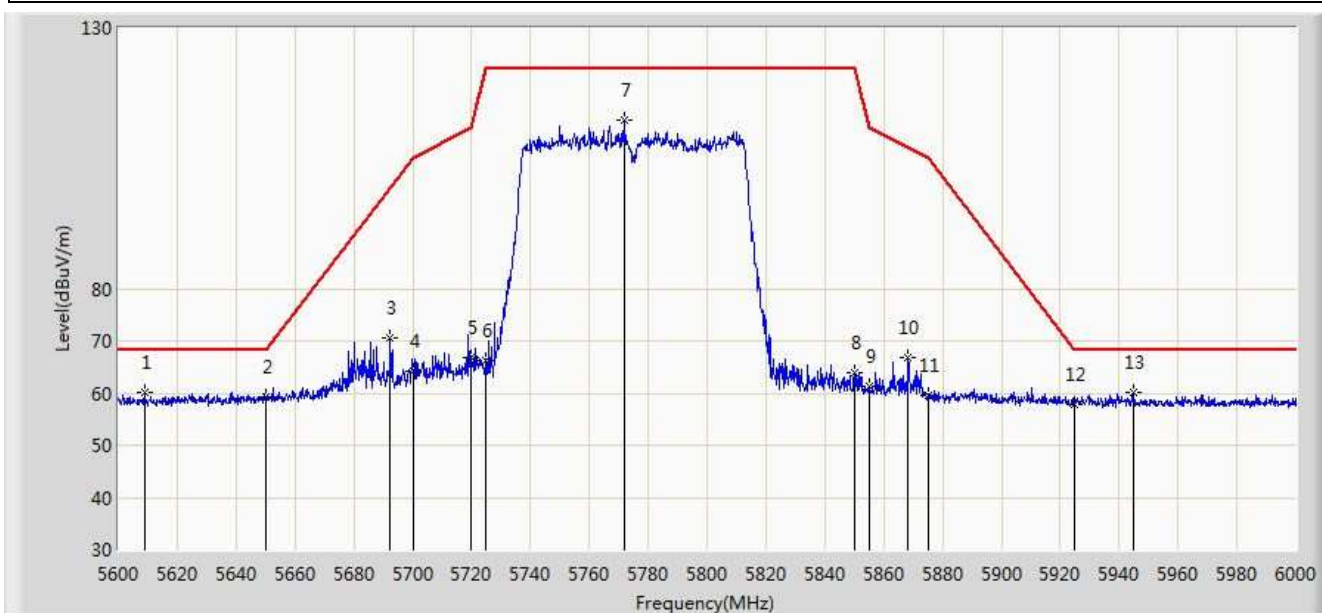


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5609.000	60.260	55.711	-7.940	68.200	4.549	PK
2			5650.000	59.173	54.502	-9.027	68.200	4.671	PK
3			5692.400	70.583	65.745	-29.014	99.597	4.838	PK
4			5700.000	64.255	59.377	-40.945	105.200	4.878	PK
5			5720.000	66.715	61.718	-44.085	110.800	4.997	PK
6			5725.000	66.222	61.193	-55.978	122.200	5.029	PK
7			5771.800	112.451	107.151	N/A	N/A	5.299	PK
8			5850.000	63.796	58.070	-58.404	122.200	5.726	PK
9			5855.000	61.221	55.475	-49.579	110.800	5.746	PK
10			5868.400	66.785	60.988	-40.261	107.046	5.796	PK
11			5875.000	59.607	53.787	-45.593	105.200	5.820	PK
12			5925.000	57.754	51.788	-10.446	68.200	5.967	PK
13			5945.000	60.101	54.085	-8.099	68.200	6.016	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/04 - 22:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

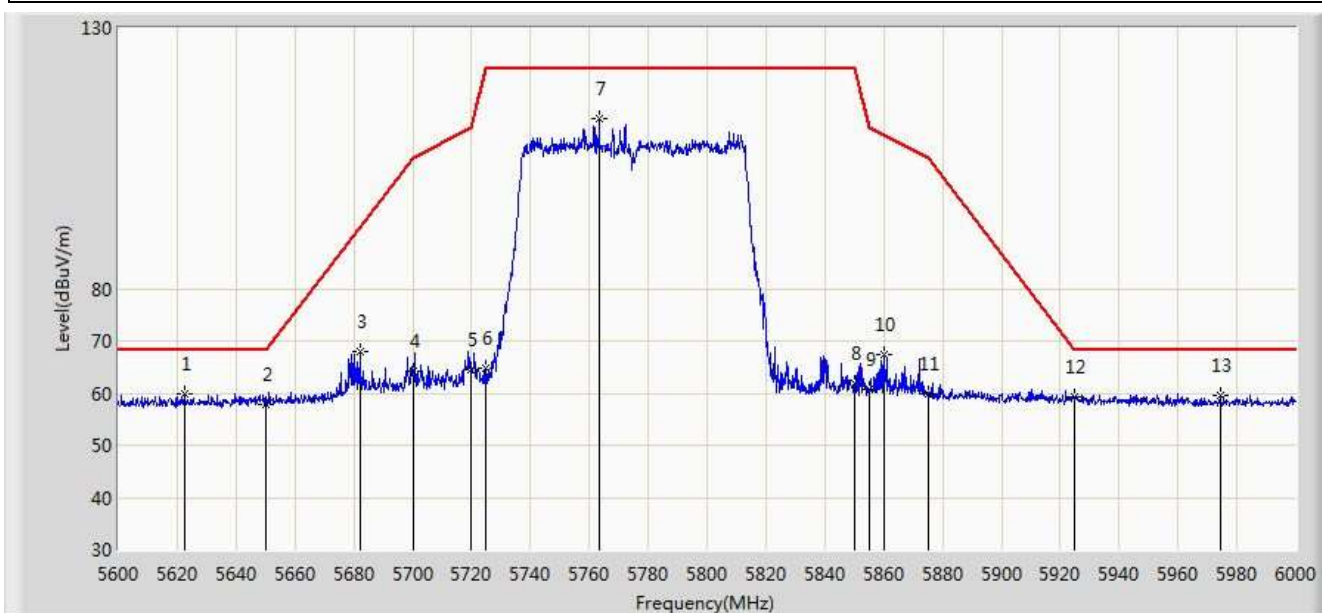


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5622.400	59.877	55.290	-8.323	68.200	4.587	PK
2			5650.000	57.755	53.084	-10.445	68.200	4.671	PK
3			5682.000	68.005	63.210	-23.912	91.918	4.795	PK
4			5700.000	64.138	59.260	-41.062	105.200	4.878	PK
5			5720.000	64.574	59.577	-46.226	110.800	4.997	PK
6			5725.000	64.790	59.761	-57.410	122.200	5.029	PK
7			5763.400	112.738	107.481	N/A	N/A	5.258	PK
8			5850.000	61.815	56.089	-60.385	122.200	5.726	PK
9			5855.000	60.811	55.065	-49.989	110.800	5.746	PK
10			5860.200	67.328	61.560	-42.014	109.342	5.767	PK
11			5875.000	59.918	54.098	-45.282	105.200	5.820	PK
12			5925.000	59.232	53.266	-8.968	68.200	5.967	PK
13			5974.200	59.500	53.432	-8.700	68.200	6.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 13:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

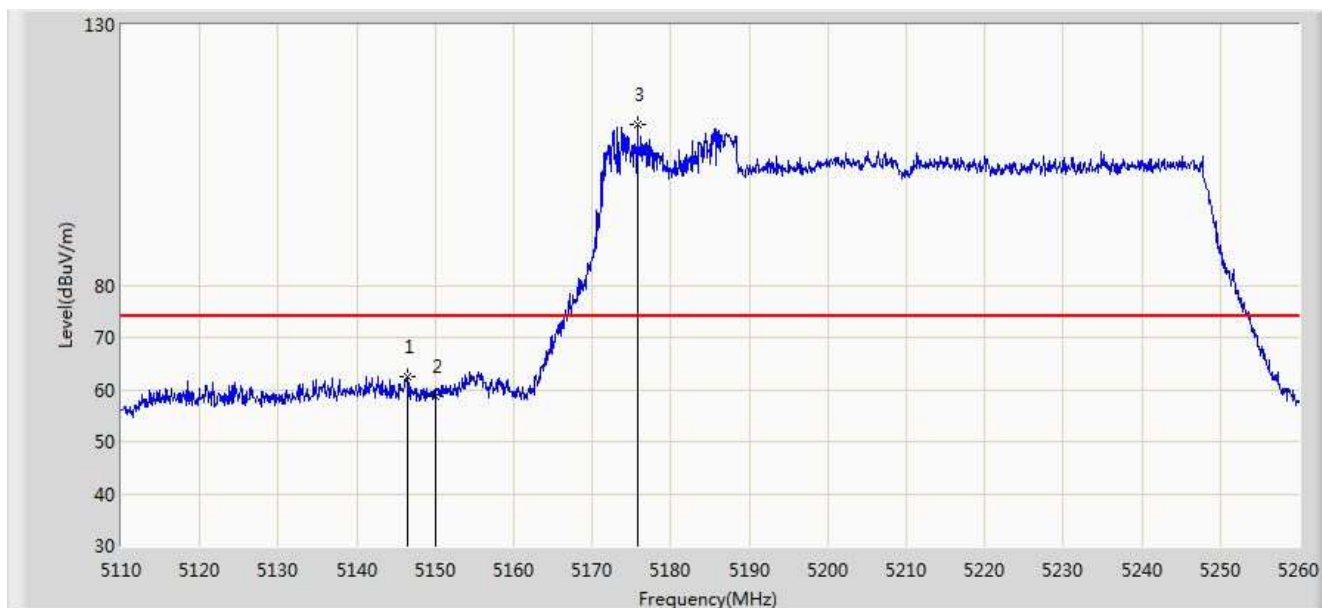


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.525	62.350	58.174	-11.650	74.000	4.176	PK
2			5150.000	58.783	54.614	-15.217	74.000	4.170	PK
3		*	5175.775	110.932	106.848	N/A	N/A	4.084	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 13:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

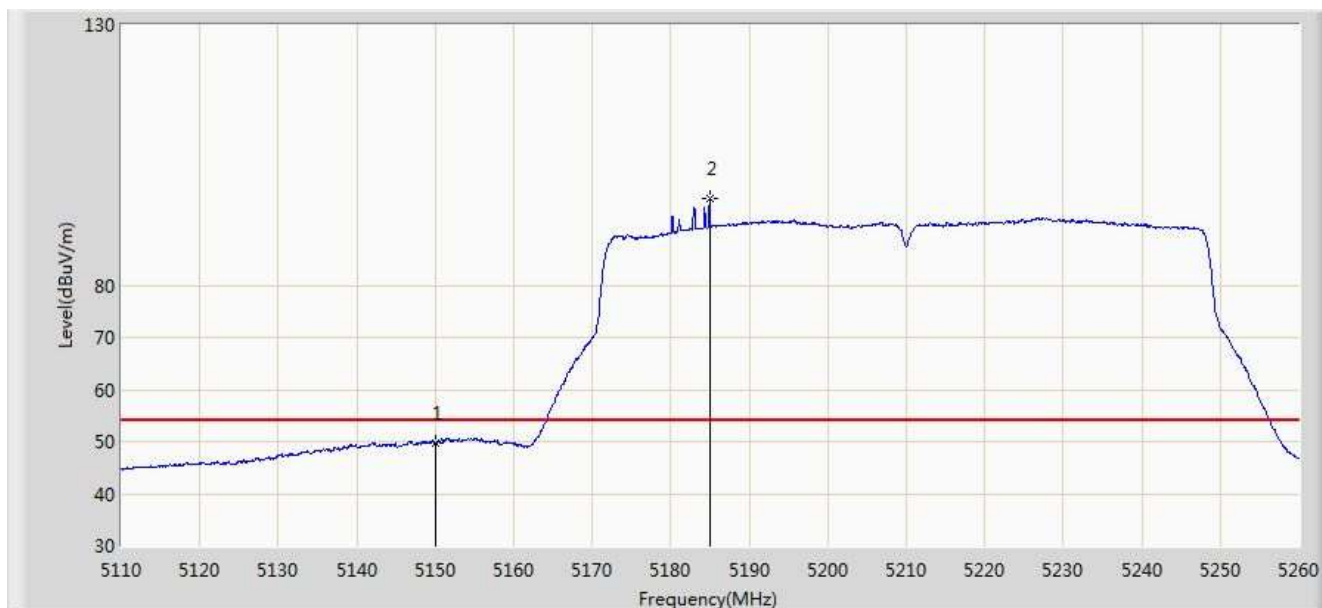


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.721	45.552	-4.279	54.000	4.170	AV
2		*	5185.000	96.671	92.620	N/A	N/A	4.052	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 13:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

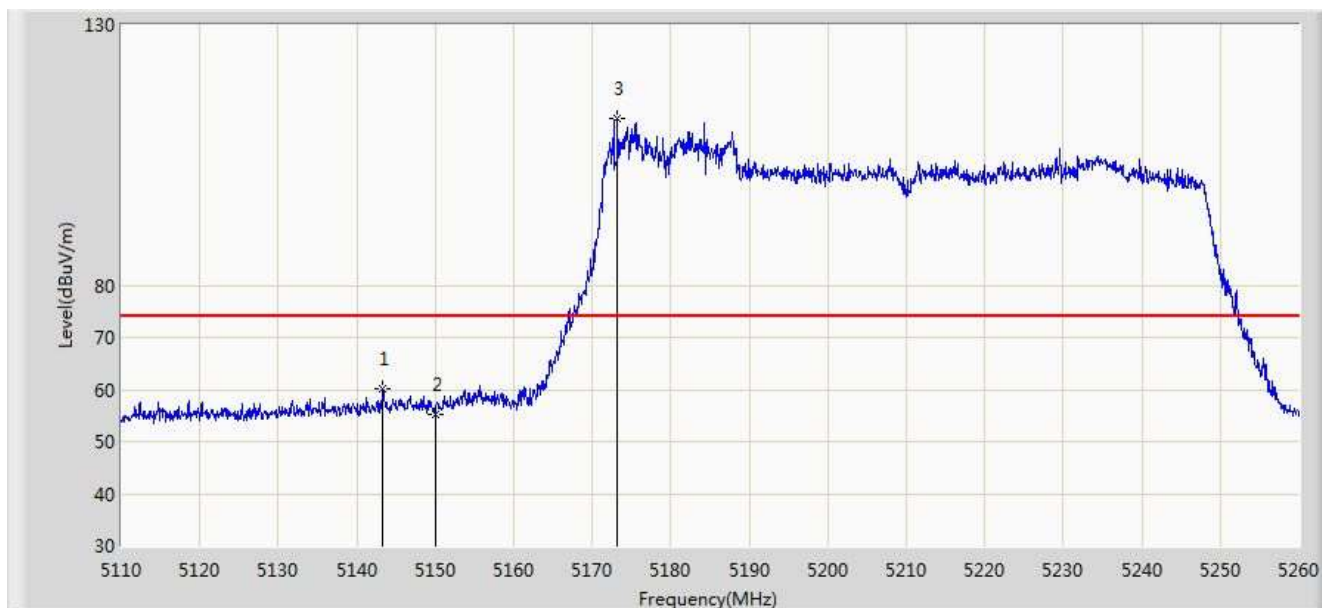


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.300	60.013	55.837	-13.987	74.000	4.176	PK
2			5150.000	55.334	51.165	-18.666	74.000	4.170	PK
3		*	5173.225	111.975	107.882	N/A	N/A	4.093	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

aSite: AC1	Time: 2017/09/27 - 14:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

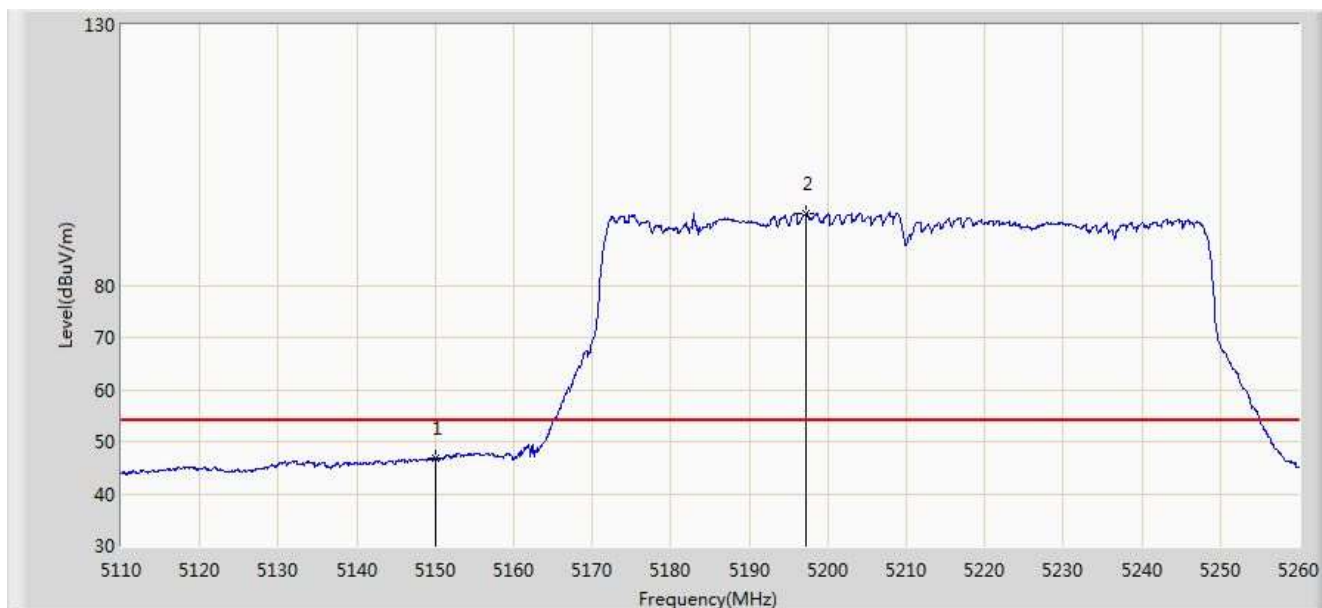


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.683	42.514	-7.317	54.000	4.170	AV
2		*	5197.300	93.825	89.817	N/A	N/A	4.008	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 14:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

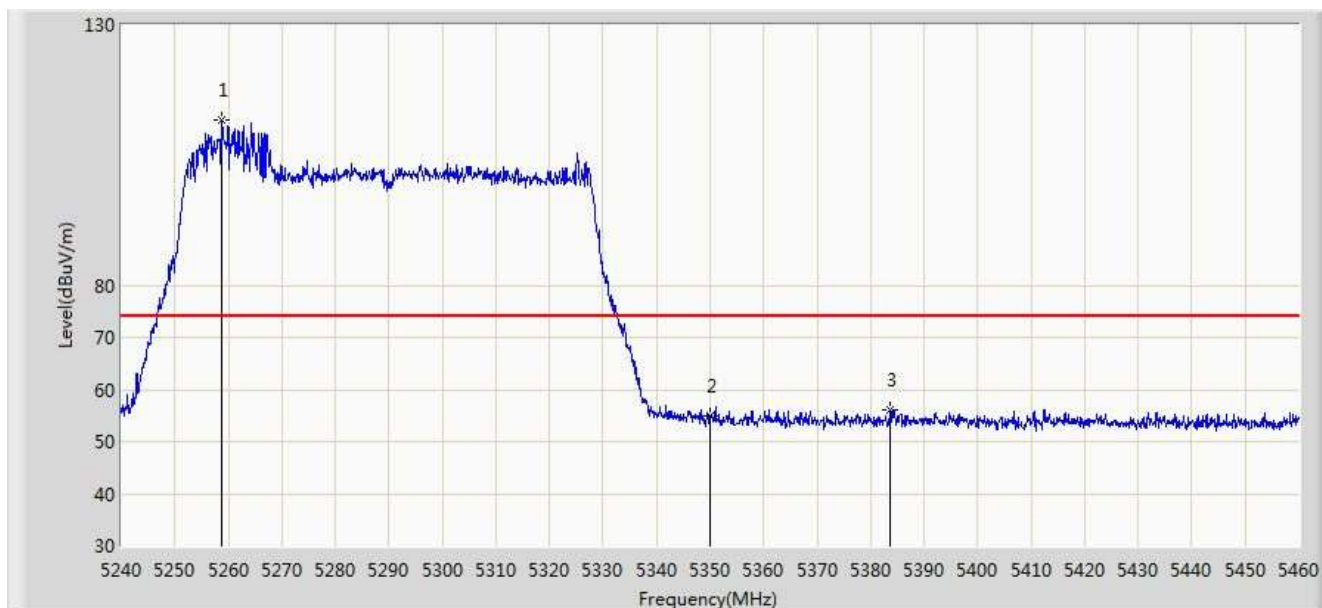


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5258.700	111.637	107.793	N/A	N/A	3.844	PK
2			5350.000	54.984	51.079	-19.016	74.000	3.904	PK
3			5383.770	55.983	52.017	-18.017	74.000	3.966	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 14:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

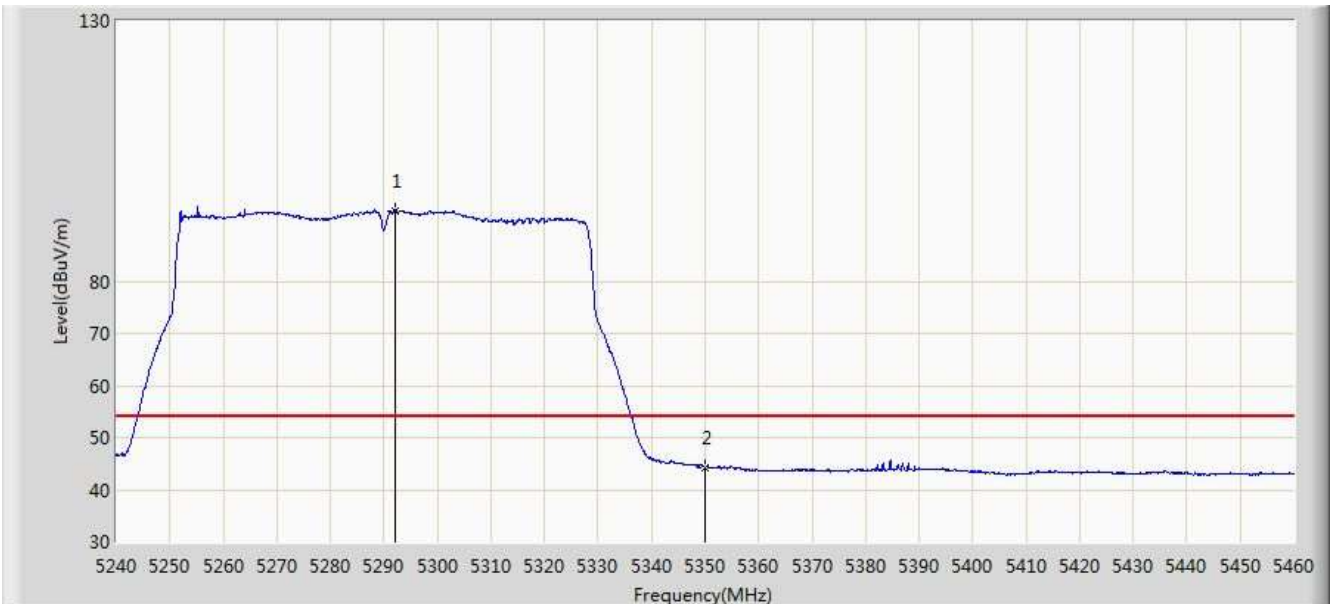


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5292.030	93.606	89.787	N/A	N/A	3.819	AV
2			5350.000	44.331	40.426	-9.669	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

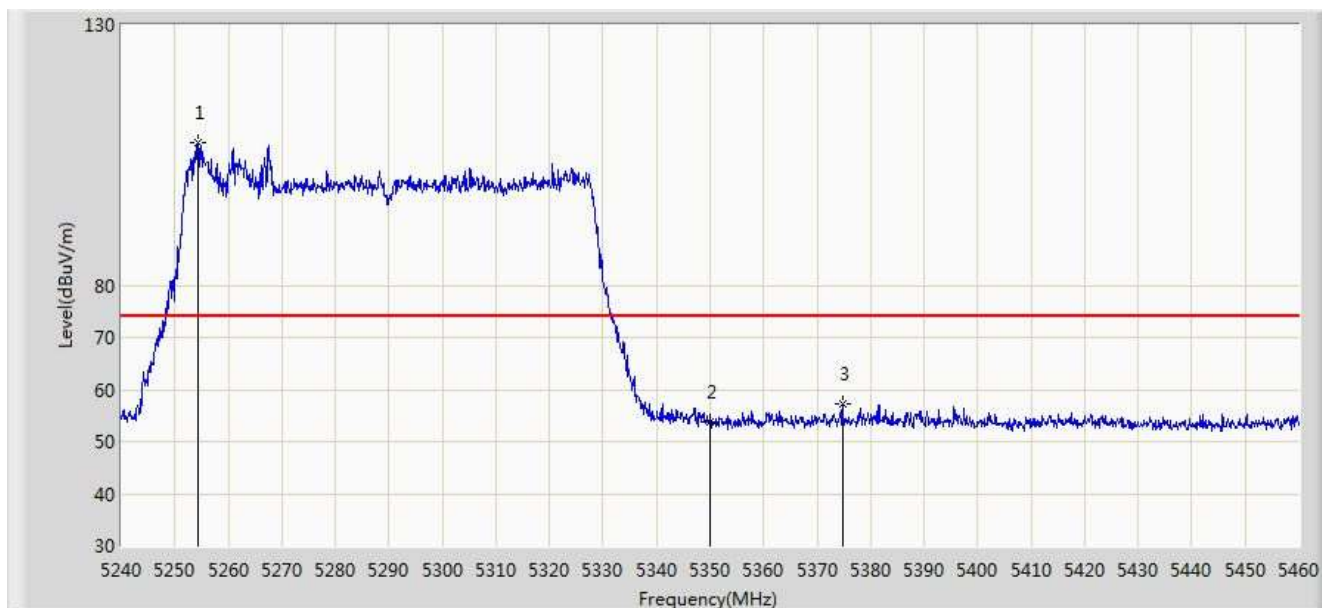


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5254.300	107.287	103.440	N/A	N/A	3.847	PK
2			5350.000	53.901	49.996	-20.099	74.000	3.904	PK
3			5374.750	57.337	53.387	-16.663	74.000	3.949	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 14:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

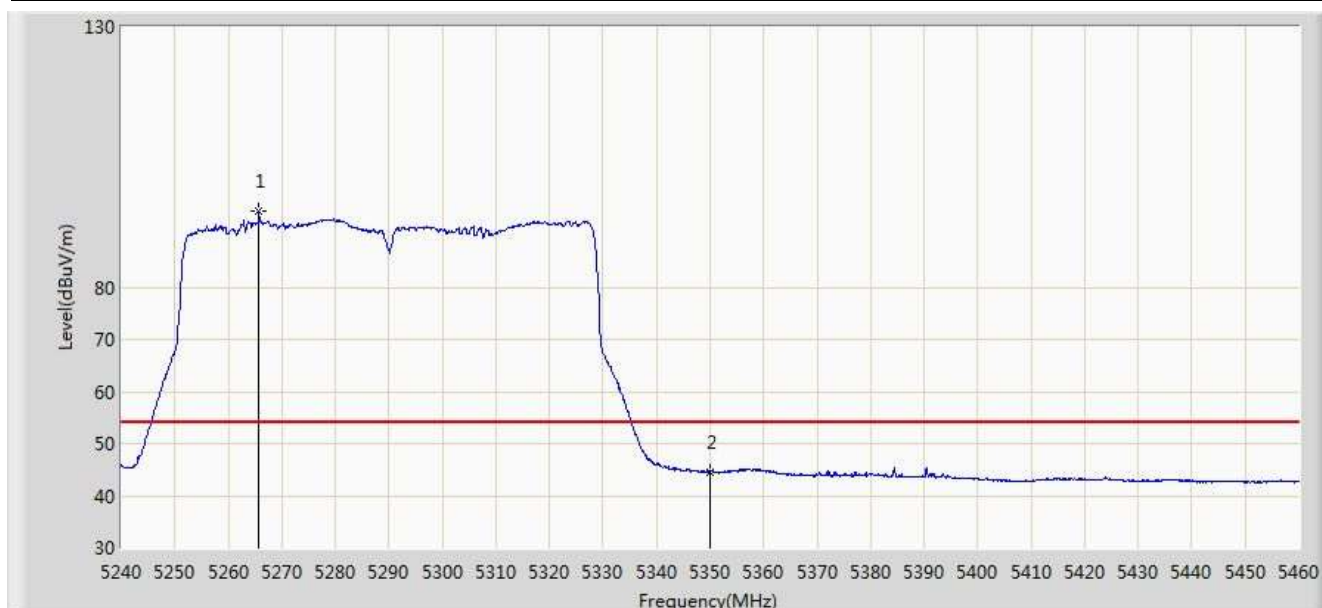


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5265.740	94.662	90.824	N/A	N/A	3.838	AV
2			5350.000	44.612	40.707	-9.388	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

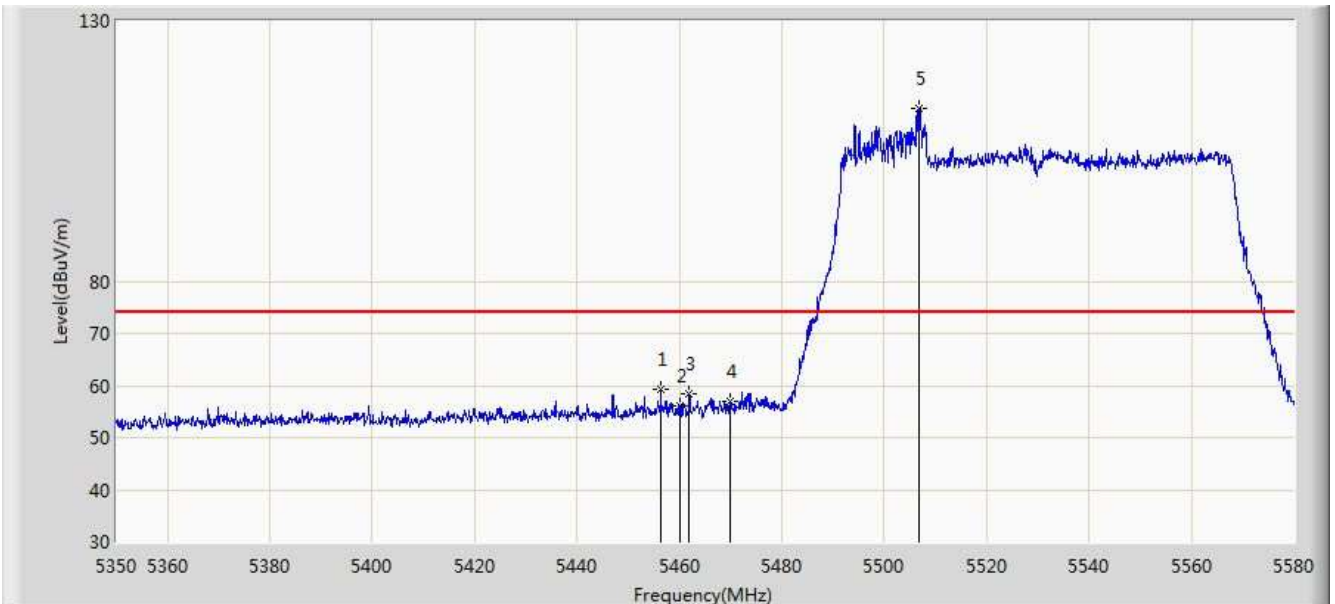


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.375	59.254	55.081	-14.746	74.000	4.172	PK
2			5460.000	56.015	51.835	-17.985	74.000	4.180	PK
3			5461.895	58.368	54.184	-15.632	74.000	4.185	PK
4			5470.000	56.823	52.621	-17.177	74.000	4.202	PK
5		*	5506.860	113.231	108.939	N/A	N/A	4.292	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 14:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

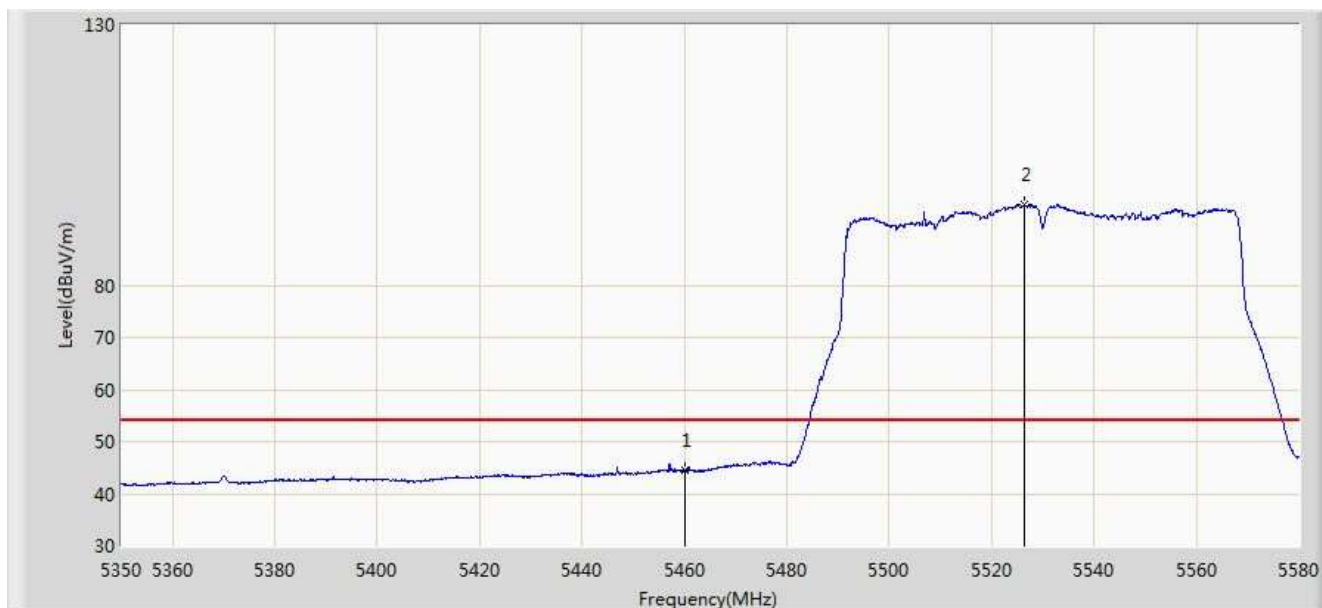


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.530	40.350	-9.470	54.000	4.180	AV
2		*	5526.295	95.405	91.055	N/A	N/A	4.350	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 14:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

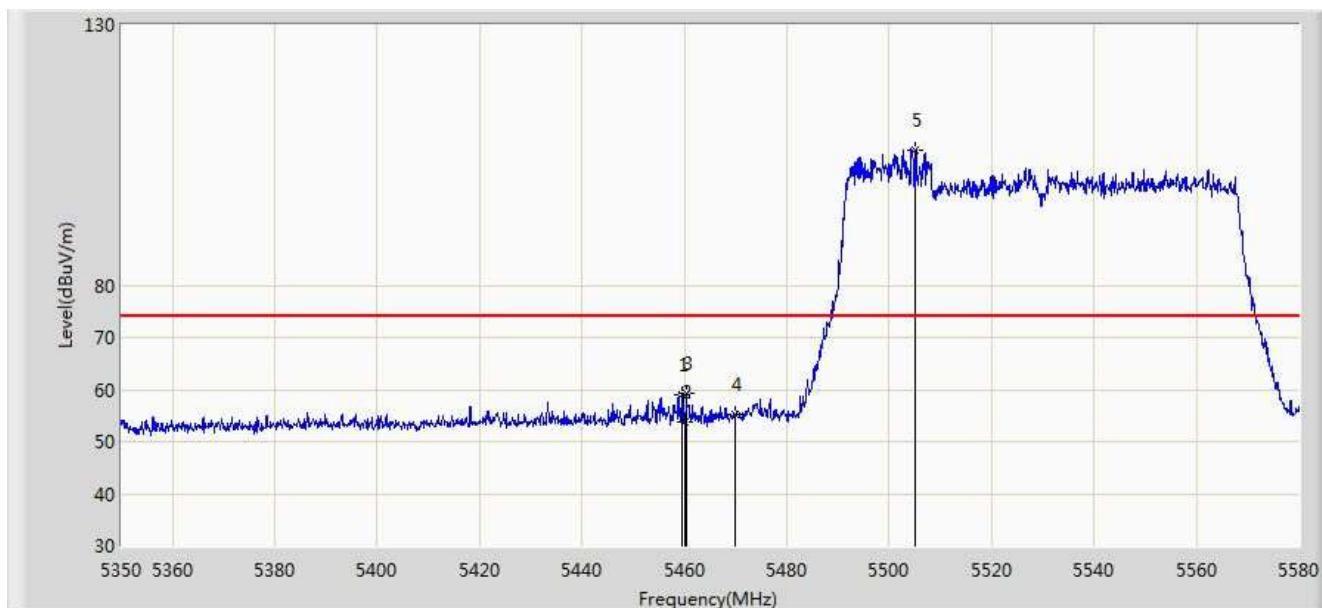


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.480	58.940	54.761	-15.060	74.000	4.179	PK
2			5460.000	53.803	49.623	-20.197	74.000	4.180	PK
3			5460.400	59.251	55.070	-14.749	74.000	4.180	PK
4			5470.000	55.246	51.044	-18.754	74.000	4.202	PK
5		*	5505.135	106.005	101.718	N/A	N/A	4.287	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/27 - 14:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (Beamforming Mode)	

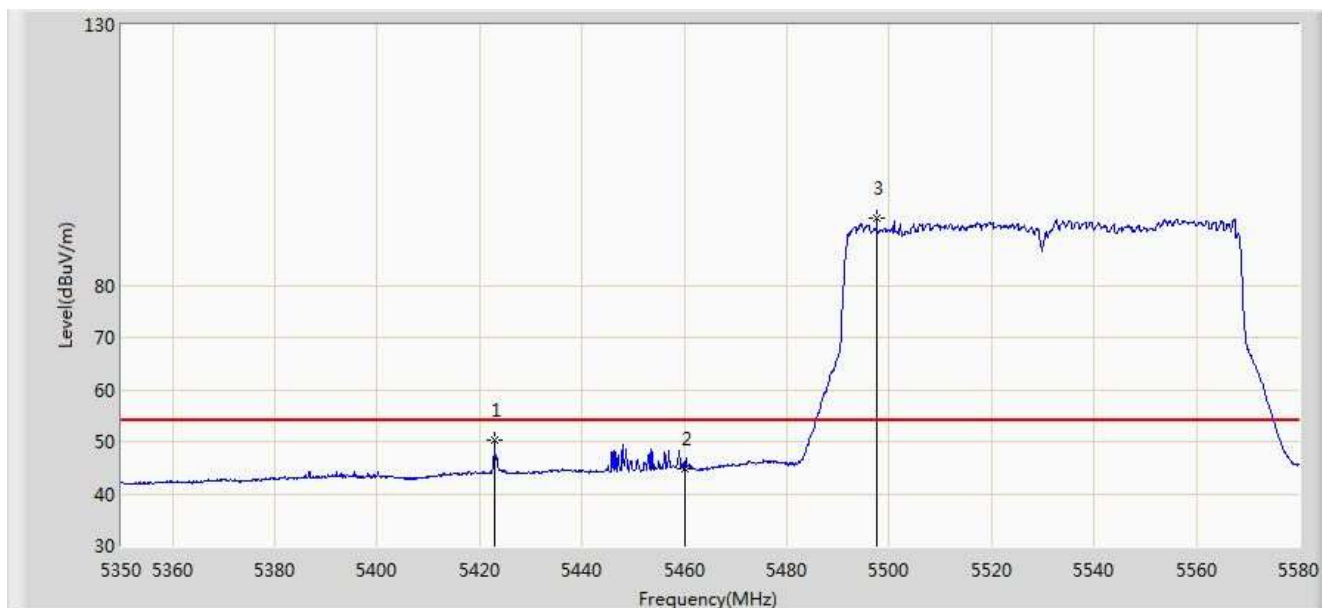

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5422.910	50.184	46.114	-3.816	54.000	4.070	AV
2			5460.000	44.846	40.666	-9.154	54.000	4.180	AV
3		*	5497.545	92.902	88.637	N/A	N/A	4.265	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)